1024L

process design review · 2154 steps · generated by CarbonEDA v0 on 2026-11-05 14:55 EST

2,939.9

kgCO2e per wafer start

1,872.8
EPW energy · 64%

132.5
MPW materials · 5%

934.6
GPW gases · 32%

wafer 300 mm · yield 1 · carbon intensity 0.43 kgCO2e/kWh · facility overhead 0.4 x tool energy
EPW 1,872.8 = tool 1,337.7 + facility overhead 535.1 kgCO2e (3,111 + 1,244 kWh)

flow technologies/flash/1024L/1024L_final.csv
layout technologies/flash/1024L/1024L_layout.oas
structure images from the spx run of 2026-11-04 23:00:47

CarbonEDA parameters

config/carbon_config.yaml and materials.yaml as used for every number in this report

EPW energy

(tool + 0.4 x tool facility overhead) x 0.43 kgCO2e/kWh

process area	kWh / step	steps
Dry_etch	1.33	55
RIE	1.33	158
HAR_etch	1.33	523
WLP3_etch	5.33	2
WLP4_etch	5.33	2
WLP5_etch	2.67	2
WLP6_etch	1.33	2
WLP7_etch	1.33	2
WLP8_etch	1.33	2
Ion_implantation	1.33	30
Diffusion	1.33	16
Metallization	2	15
Wet_etch	0.28	9
Wafer_clean	0.28	104
Resist	0.28	1
CMP	0.28	27
Deposition	1.09	14
Deposition_stack	0.545	1045
CVD	1.09	91
ArF-i	0.36	12
ArF	0.33	9
KrF	0.33	22
Hg	0.33	11

GPW process gases

kg x (1 - utilization) x (1 - abatement) x GWP, plus byproducts kg/kg x (1 - abatement) x GWP; defaults: utilization 1.0, abatement 0.9

area	gas	g / step	upstream*	utilization	abatement	byproducts (kg per kg gas)
CVD	NF3	2.54	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
Deposition_stack	NF3	1.27	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
HAR_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
HAR_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP3_etch	C4F8	0.641	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP3_etch	SF6	1.76	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP4_etch	C4F8	0.641	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP4_etch	SF6	1.76	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP5_etch	C4F8	0.321	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP5_etch	SF6	0.878	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP6_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP6_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP7_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP7_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP8_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP8_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
RIE	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
RIE	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05

* kgCO2e per kg of gas made, counted in MPW

CarbonEDA parameters (continued)

GWP (kgCO2e per kg, 100-yr) and abatement of every gas emitted

gas	GWP	abatement
CF4	7390	0.89
C2F6	12200	0.95
C4F6	0	0.98
C4F8	10300	0.98
CHF3	14800	0.98

gas	GWP	abatement
CH2F2	675	0.98
CH3F	116	0.98
NF3	17200	0.95
SF6	22800	0.95

Step #20: Wafer

substrate · Wafer

26	26	0.88%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

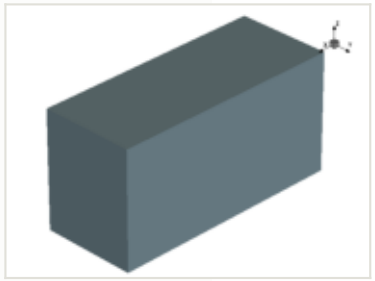

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	26 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 0 of 1,872.8

MPW materials — 26 of 132.5 (this step +26)

GPW gases — 0 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

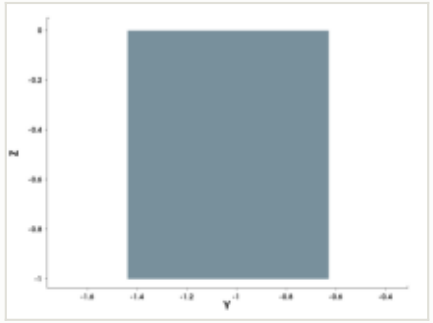

y cut at -1.035 µm

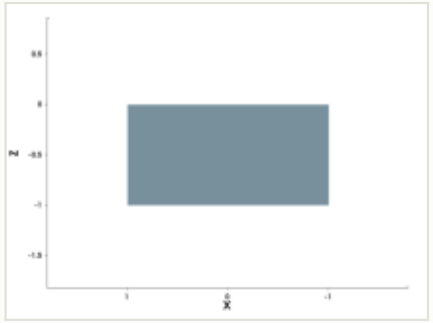

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

Step #30: Dry_etch

marking · Dry_etch

0.801	26.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

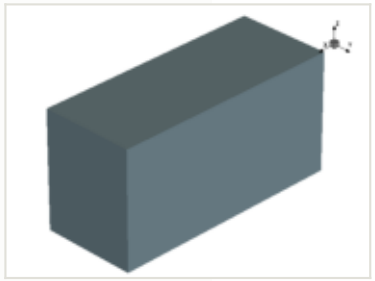

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 0.801 of 1,872.8 (this step +0.801)

MPW materials — 26 of 132.5

GPW gases — 0 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

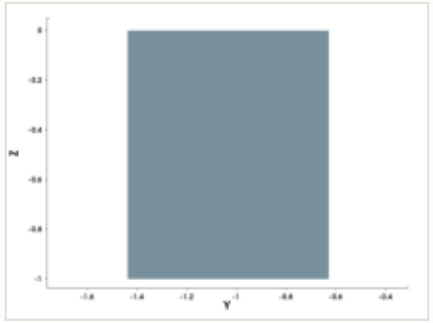

y cut at -1.035 µm

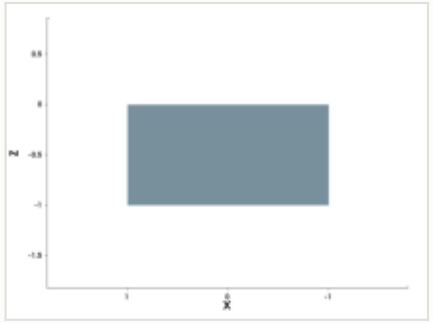

mask for this step

no mask for this step

steps by process area

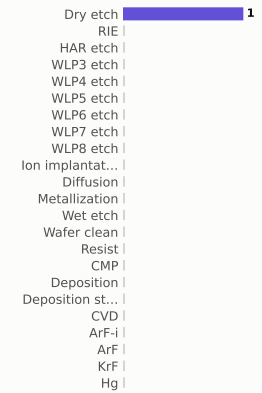

materials deposited (g)



gases emitted (g)

Step #40: Wafer_clean

clean · Wafer_clean

0.169	27	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

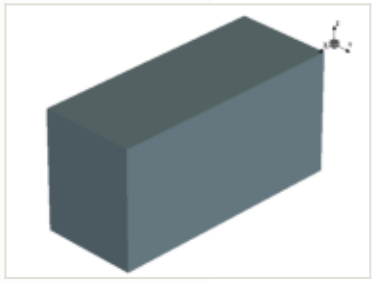

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)



embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

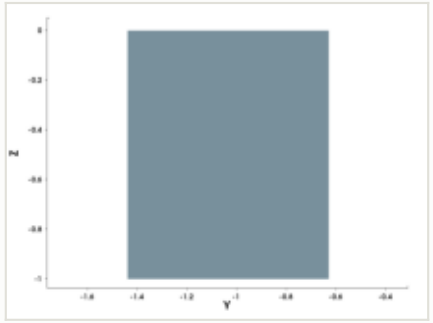

y cut at -1.035 µm

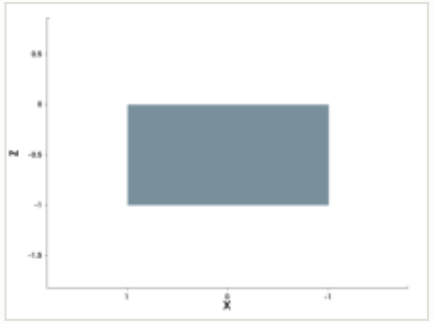

mask for this step

no mask for this step

steps by process area

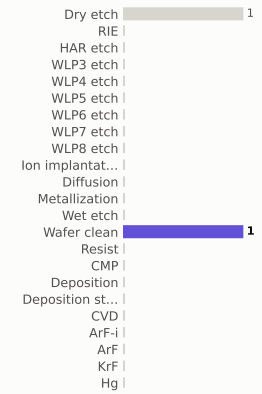

materials deposited (g)



gases emitted (g)

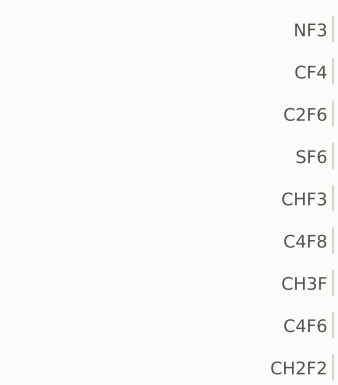

Step #60: Wafer_clean

clean · Wafer_clean

0.169	27.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

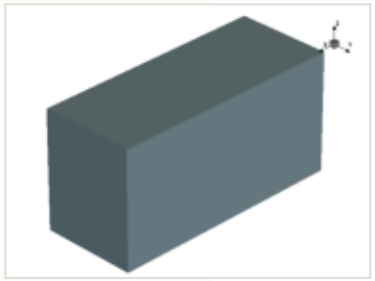

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

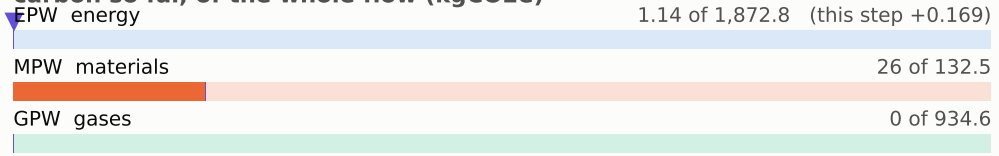

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

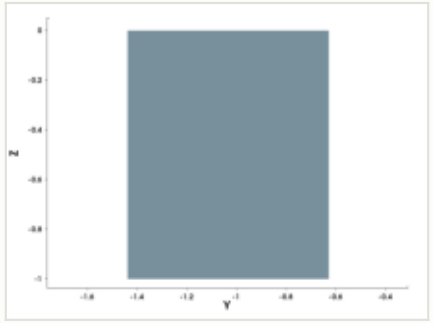

y cut at -1.035 µm

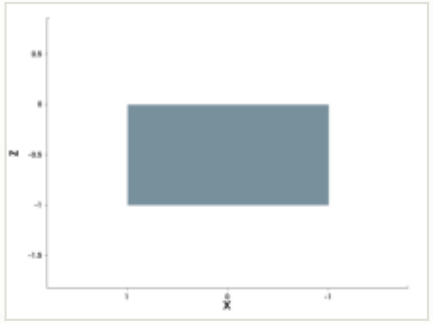

mask for this step

no mask for this step

steps by process area

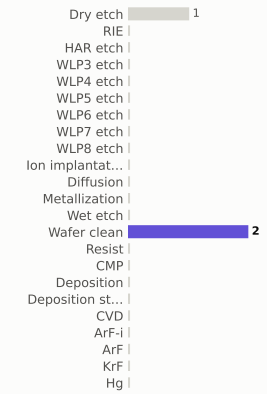

materials deposited (g)



gases emitted (g)

Step #70: Diffusion

depo_isotropic · Diffusion

0.801	27.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

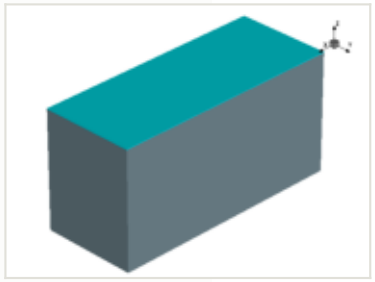

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	0.0064 µm	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

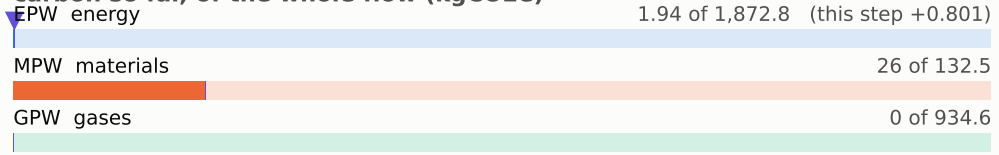

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

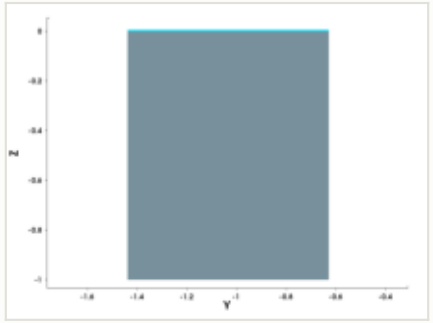

y cut at -1.035 µm

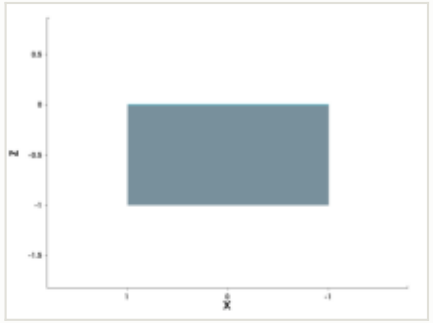

mask for this step

no mask for this step

steps by process area

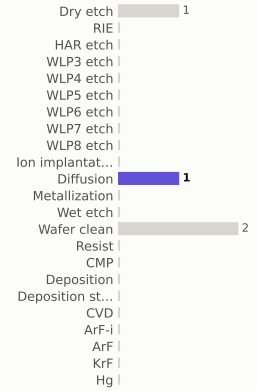

materials deposited (g)



gases emitted (g)

Step #80: CVD

depo_isotropic · CVD

1.31	29.2	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

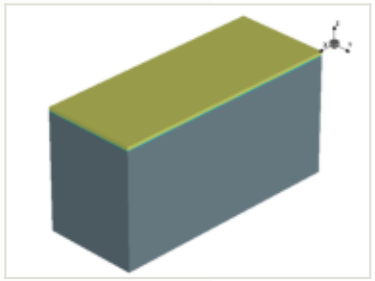

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 2.59 of 1,872.8 (this step +0.656)

MPW materials — 26 of 132.5 (this step +0.0317)

GPW gases — 0.62 of 934.6 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

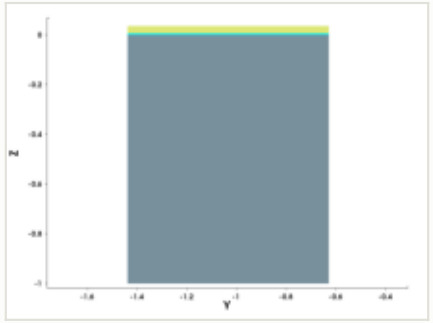

y cut at -1.035 µm

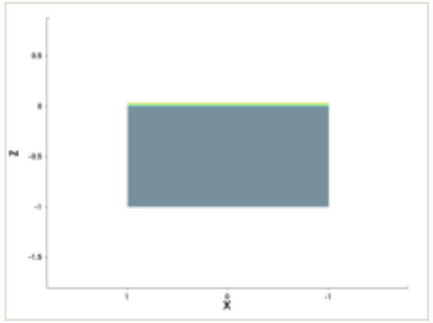

mask for this step

no mask for this step

steps by process area

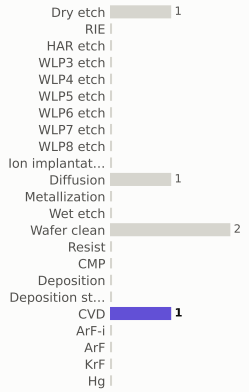

materials deposited (g)



gases emitted (g)

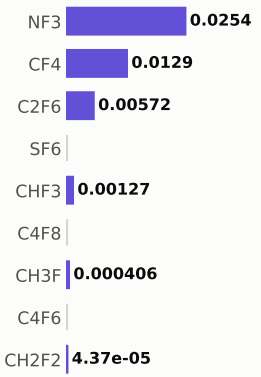

Step #90: KrF

litho_patterning · KrF

0.199	29.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

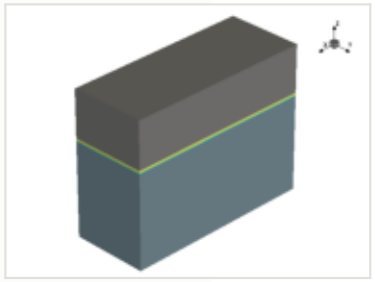

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

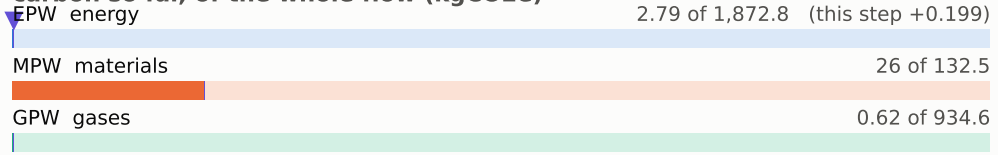

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

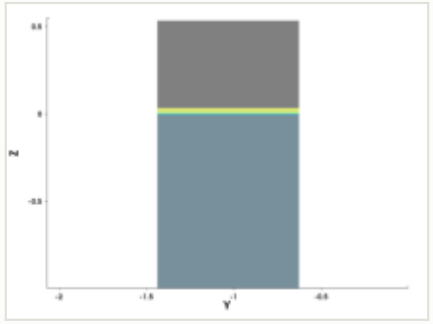

y cut at -1.035 µm

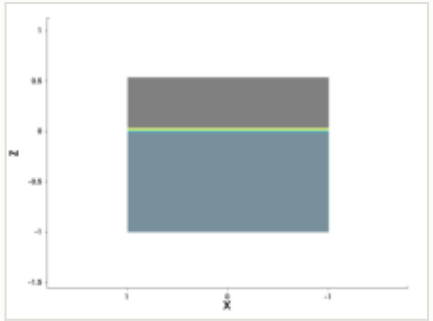

mask: layer 1:0, positive (OASIS)

steps by process area

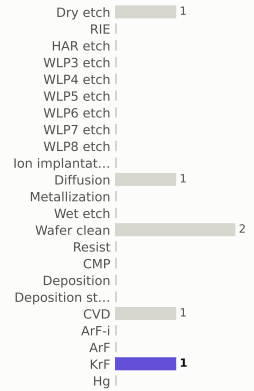

materials deposited (g)



gases emitted (g)

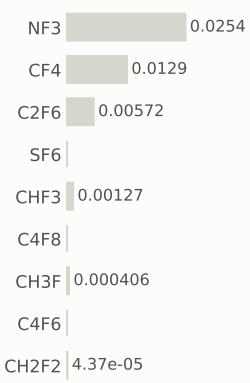

Step #100: RIE

etch_anisotropic · RIE

1.04	30.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

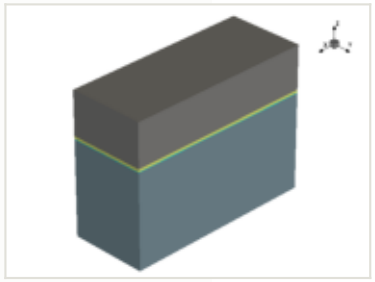

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 3.59 of 1,872.8 (this step +0.801)

MPW materials — 26.1 of 132.5 (this step +0.0571)

GPW gases — 0.808 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

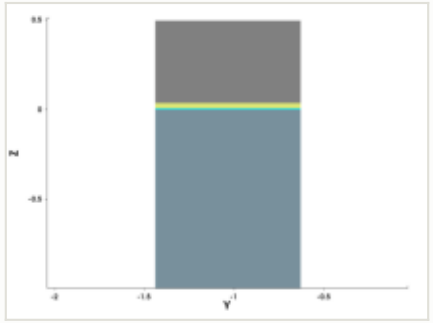

y cut at -1.035 µm

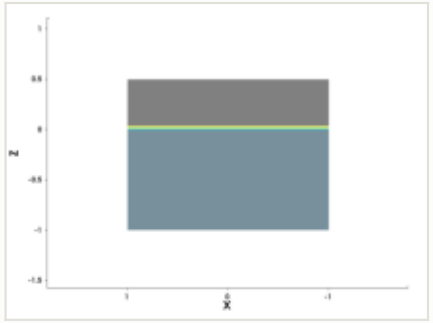

mask for this step

no mask for this step

steps by process area

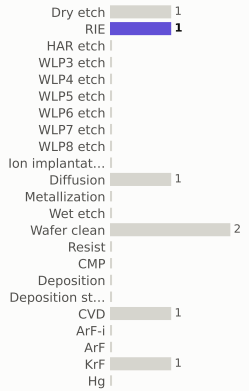

materials deposited (g)



gases emitted (g)

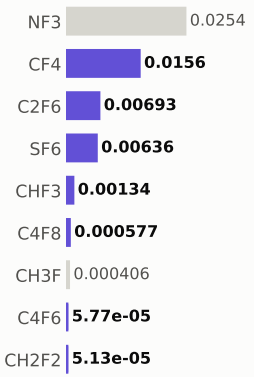

Step #110: RIE

etch_anisotropic · RIE

1.04	31.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

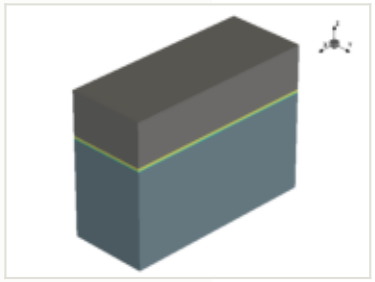

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 4.39 of 1,872.8 (this step +0.801)

MPW materials — 26.1 of 132.5 (this step +0.0571)

GPW gases — 0.995 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

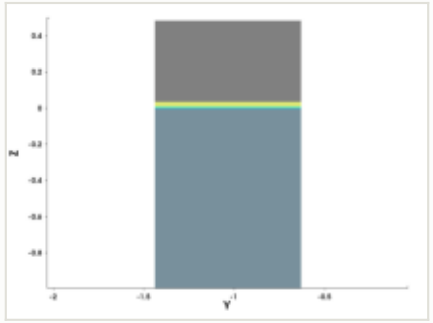

y cut at -1.035 µm

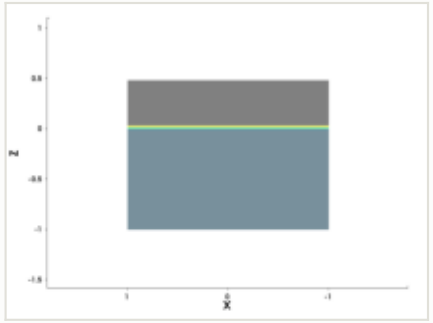

mask for this step

no mask for this step

steps by process area

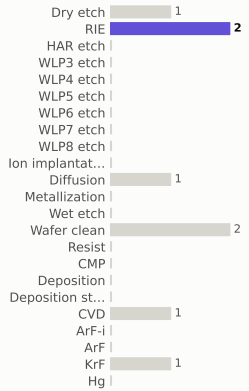

materials deposited (g)



gases emitted (g)

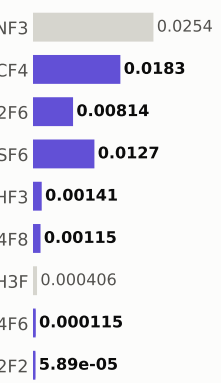

Step #120: RIE

etch_anisotropic · RIE

1.04	32.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

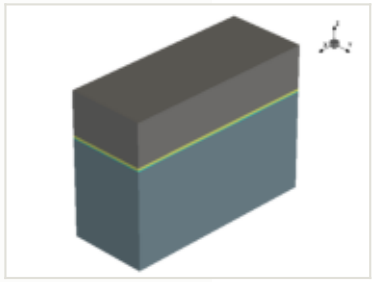

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 5.2 of 1,872.8 (this step +0.801)

MPW materials — 26.2 of 132.5 (this step +0.0571)

GPW gases — 1.18 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

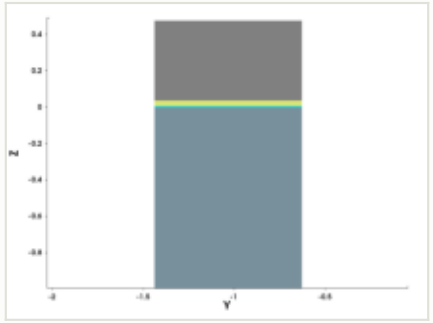

y cut at -1.035 µm

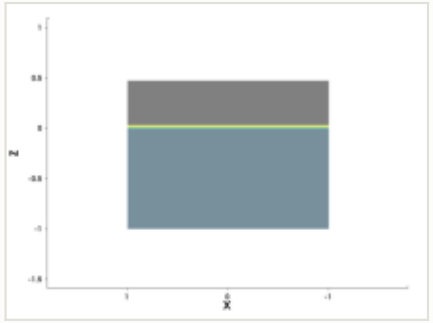

mask for this step

no mask for this step

steps by process area

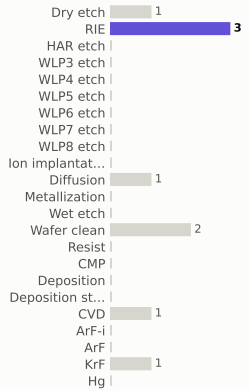

materials deposited (g)



gases emitted (g)

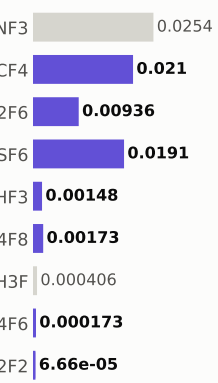

Step #130: Dry_etch

etch_strip · Dry_etch

0.801	33.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

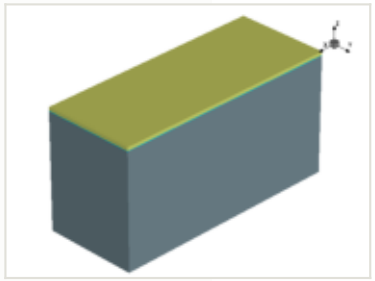

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

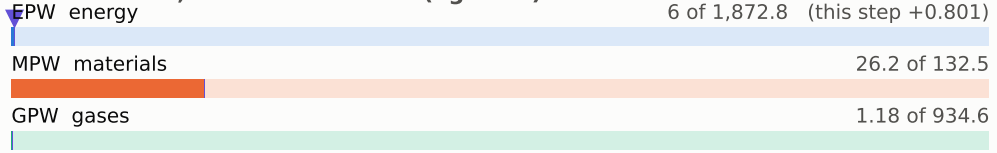

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

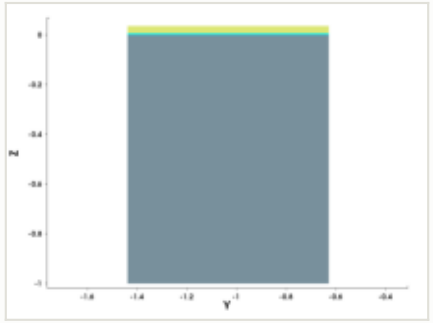

y cut at -1.035 µm

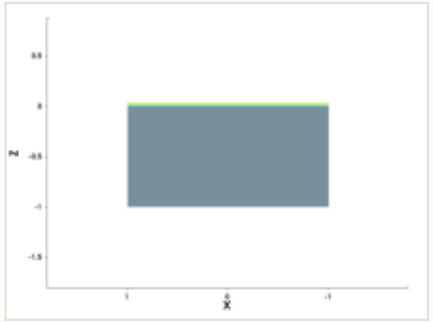

mask for this step

no mask for this step

steps by process area

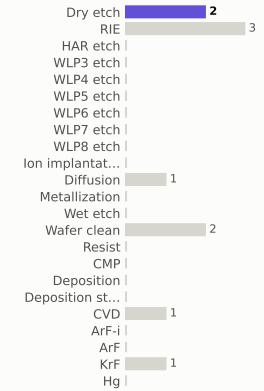

materials deposited (g)



gases emitted (g)

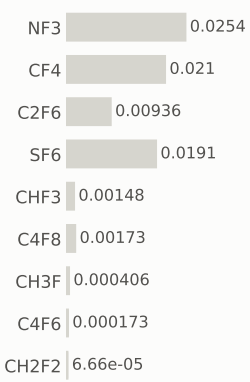

Step #140: Wafer_clean

clean · Wafer_clean

0.169	33.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

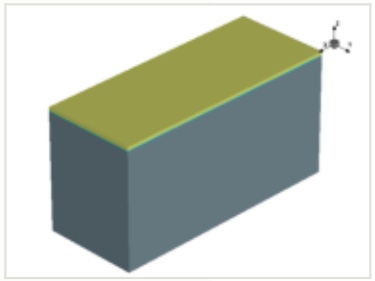

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

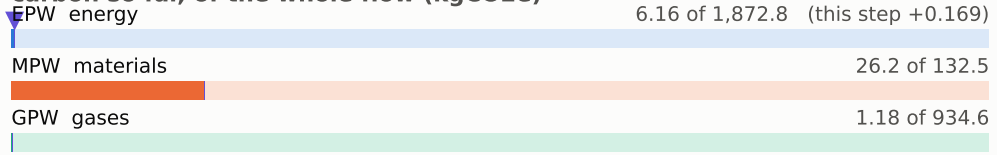

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

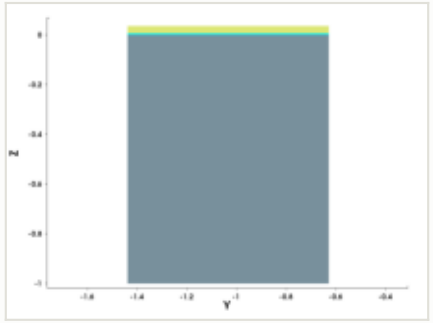

y cut at -1.035 µm

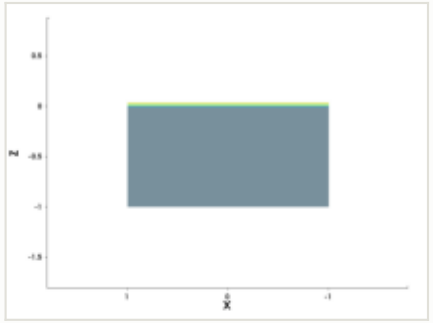

mask for this step

no mask for this step

steps by process area

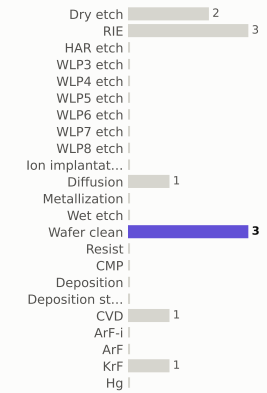

materials deposited (g)



gases emitted (g)



Step #150: Diffusion

depo_isotropic · Diffusion

0.801	34.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

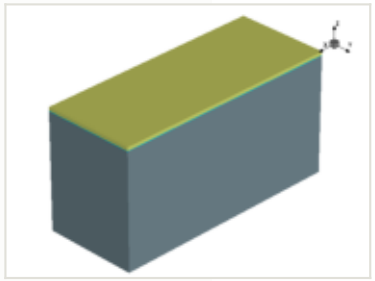

this step

process area	Diffusion
material	—
thickness	0.042 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

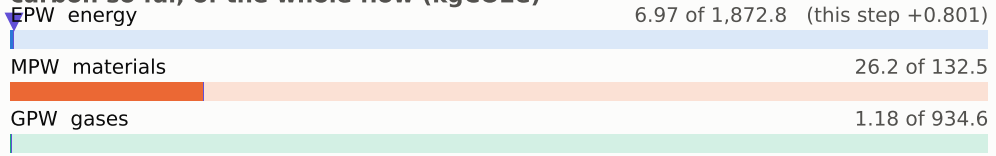

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

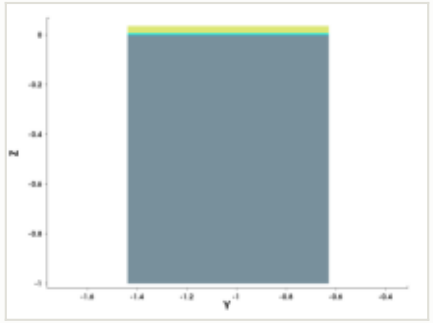

y cut at -1.035 µm

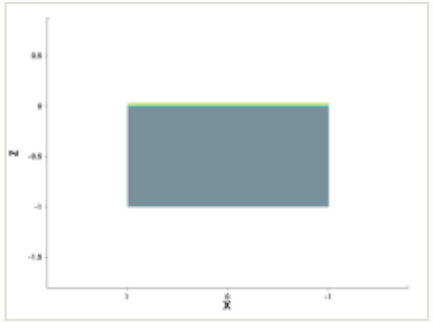

mask for this step

no mask for this step

steps by process area

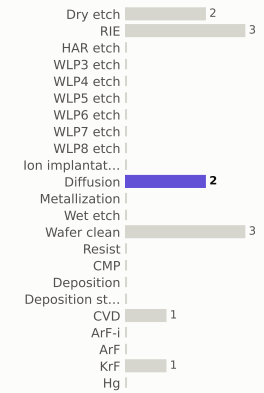

materials deposited (g)

gases emitted (g)



Step #160: Wet_etch

etch_isotropic · Wet_etch

0.169	34.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

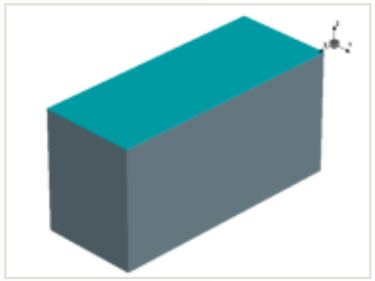

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

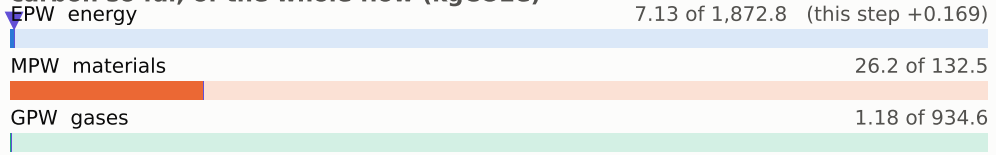

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

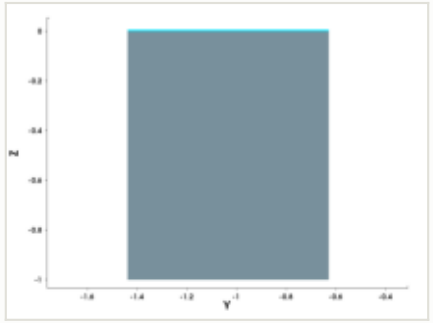

y cut at -1.035 µm

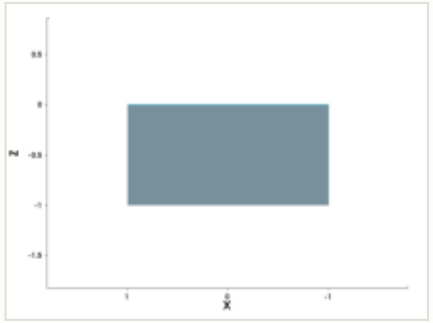

mask for this step

no mask for this step

steps by process area

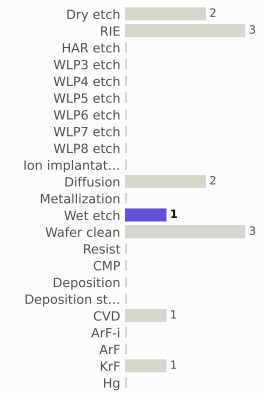

materials deposited (g)



gases emitted (g)



Step #170: Wafer_clean

clean · Wafer_clean

0.169	34.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

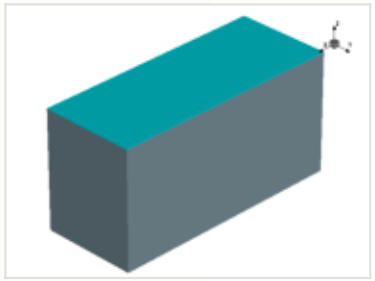

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

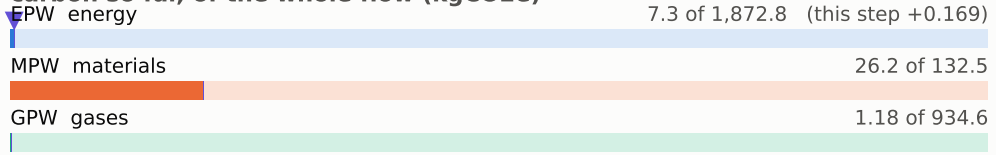

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

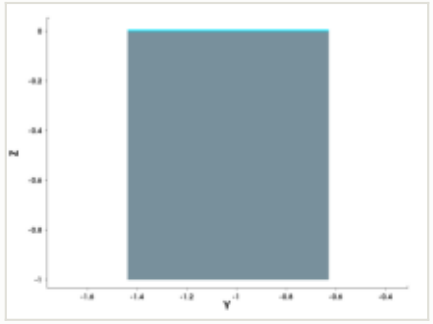

y cut at -1.035 µm

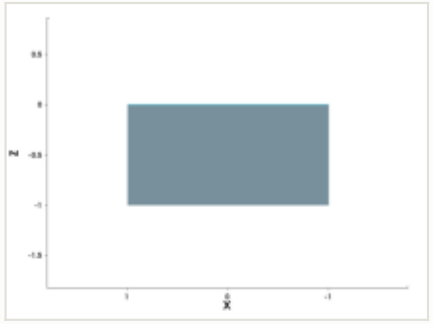

mask for this step

no mask for this step

steps by process area

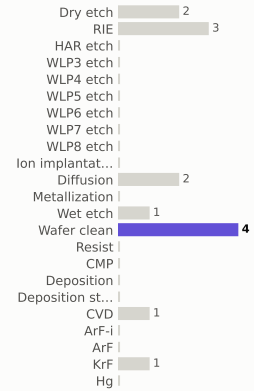

materials deposited (g)



gases emitted (g)

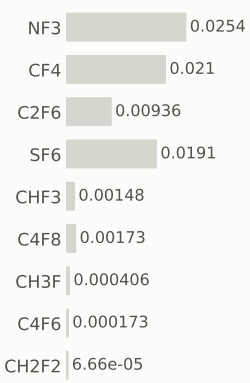

Step #180: Diffusion

implant_ellipsoid · Diffusion

0.801	35.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

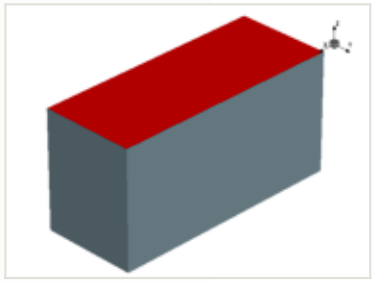

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

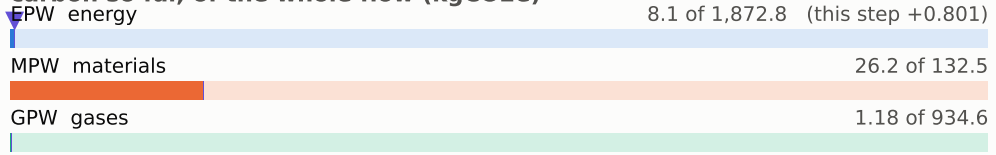

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

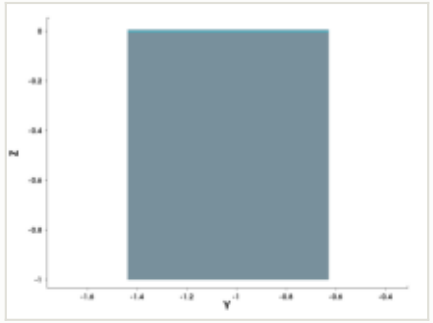

y cut at -1.035 µm

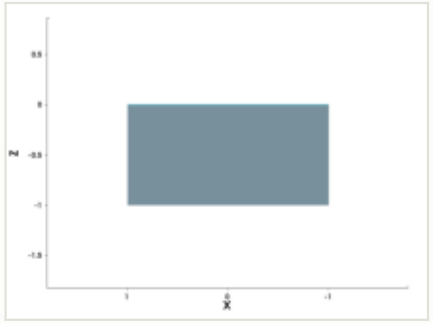

mask for this step

no mask for this step

steps by process area

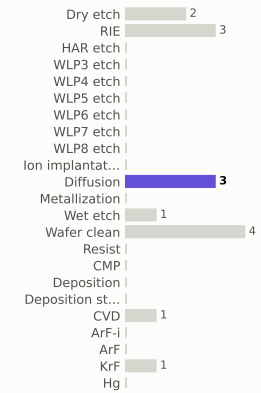

materials deposited (g)



gases emitted (g)



Step #190: Diffusion

anneal · Diffusion

0.801	36.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

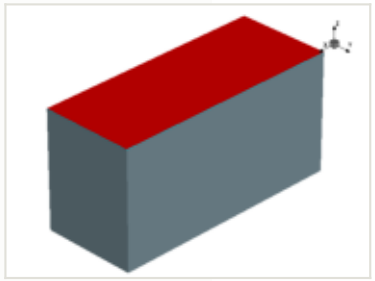

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

EPW energy — 8.9 of 1,872.8 (this step +0.801)

MPW materials — 26.2 of 132.5

GPW gases — 1.18 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

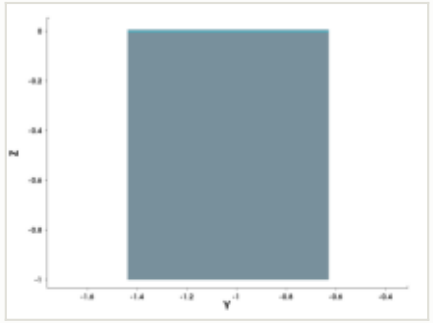

y cut at -1.035 µm

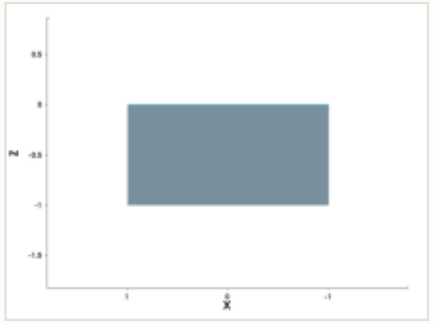

mask for this step

no mask for this step

steps by process area

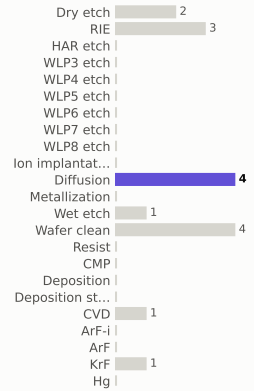

materials deposited (g)



gases emitted (g)

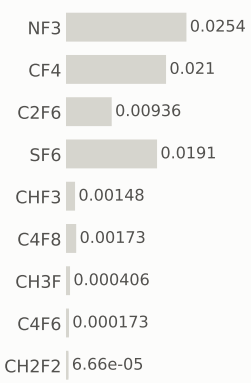

Step #200: CVD

depo_isotropic · CVD

1.31	37.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

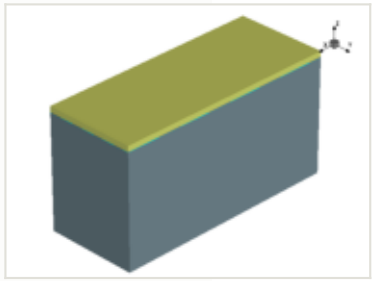

this step

process area	CVD
material	—
thickness	0.05 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 9.56 of 1,872.8 (this step +0.656)

MPW materials — 26.2 of 132.5 (this step +0.0317)

GPW gases — 1.8 of 934.6 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

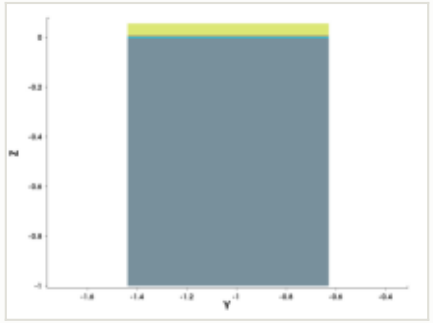

y cut at -1.035 µm

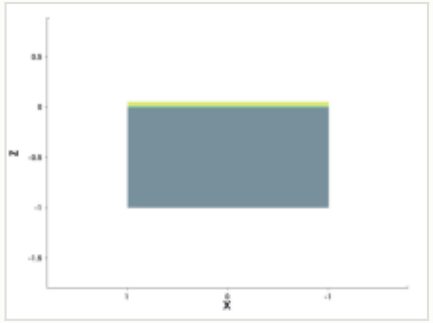

mask for this step

no mask for this step

steps by process area

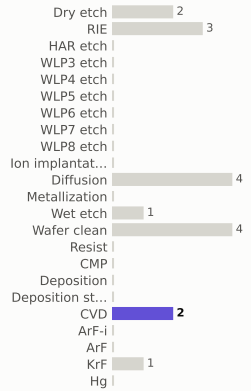

materials deposited (g)



gases emitted (g)

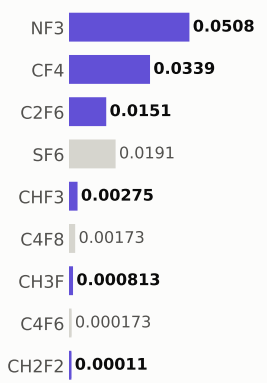

Step #220: Hg

litho_patterning · Hg

0.199	37.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

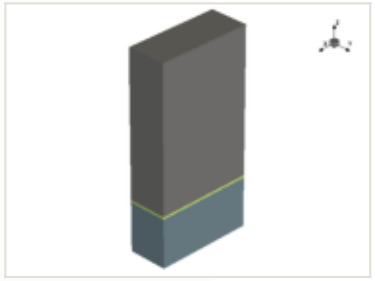

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

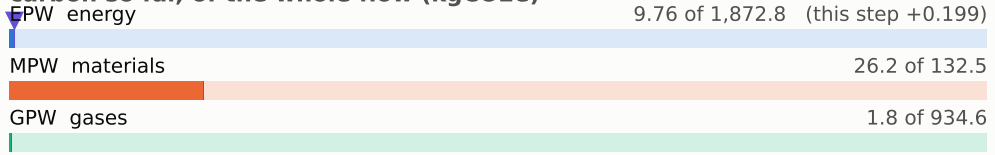

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

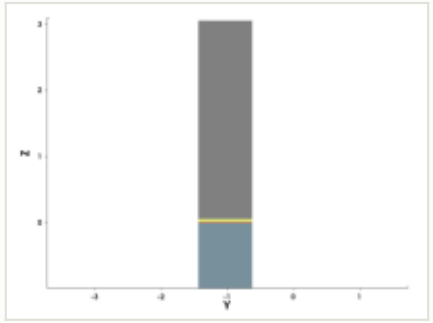

y cut at -1.035 µm

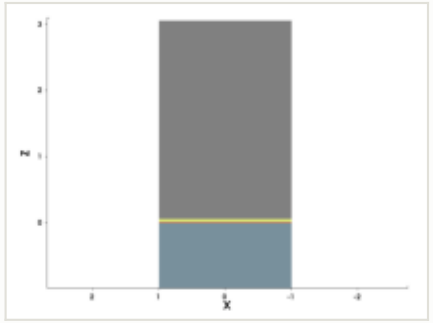

mask: layer 2:0, positive (OASIS)

steps by process area

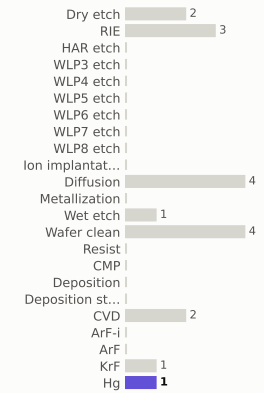

materials deposited (g)

gases emitted (g)

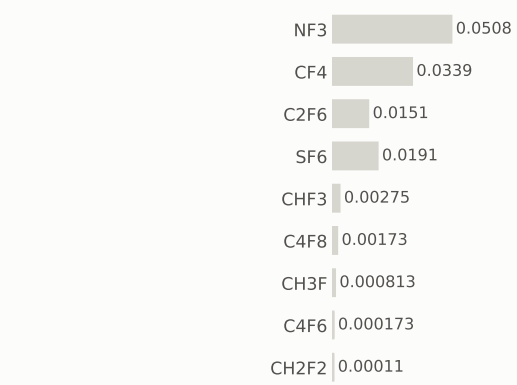

Step #230: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	38.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

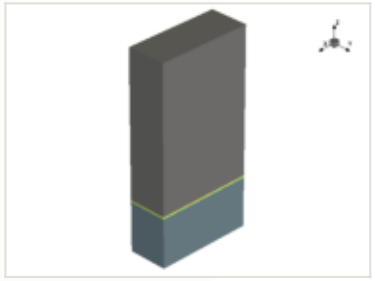

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

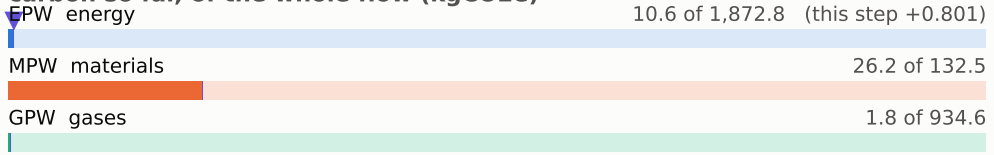

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

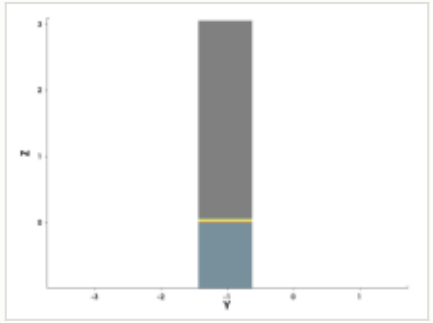

y cut at -1.035 µm

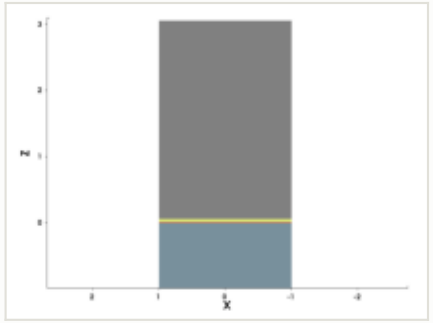

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #240: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	39.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

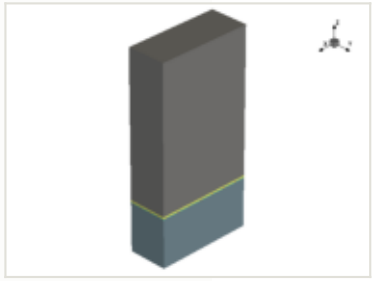

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

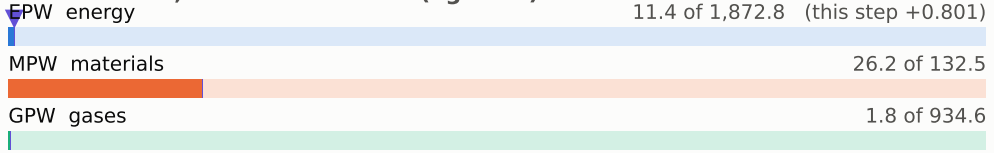

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

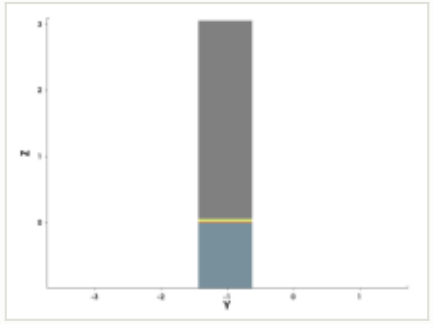

y cut at -1.035 µm

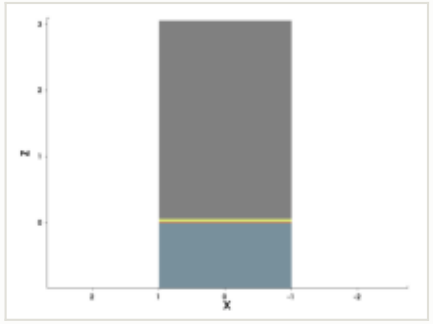

mask for this step

no mask for this step

steps by process area

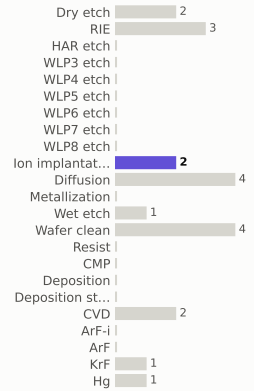

materials deposited (g)



gases emitted (g)

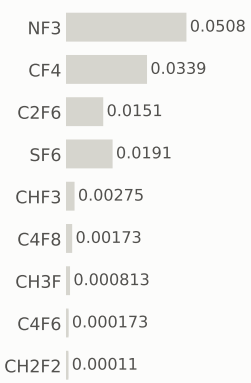

Step #250: Dry_etch

etch_strip · Dry_etch

0.801	40.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

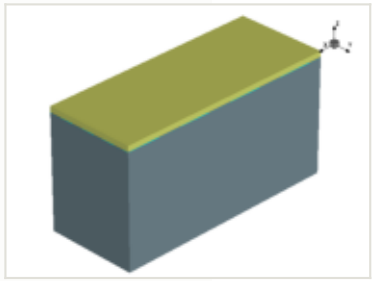

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

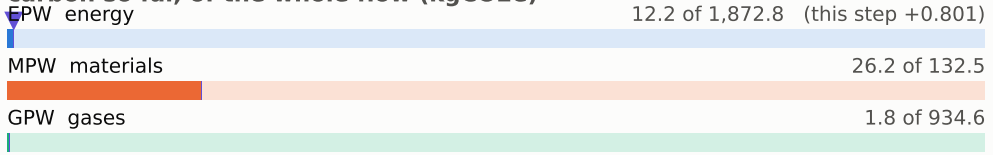

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

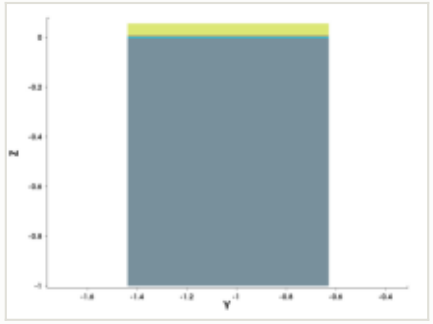

y cut at -1.035 µm

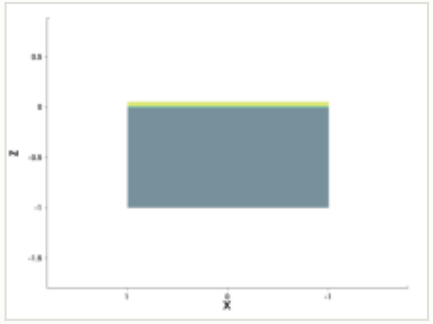

mask for this step

no mask for this step

steps by process area

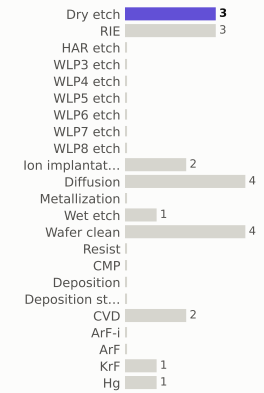

materials deposited (g)



gases emitted (g)



Step #260: Wafer_clean

clean · Wafer_clean

0.169	40.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

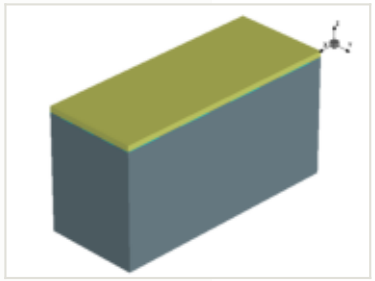

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

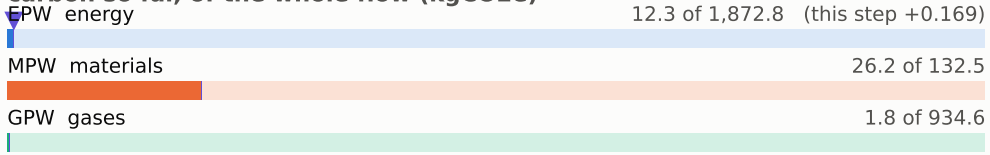

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

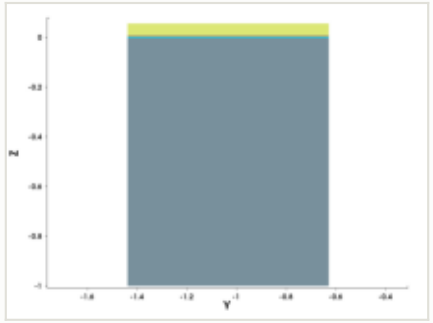

y cut at -1.035 µm

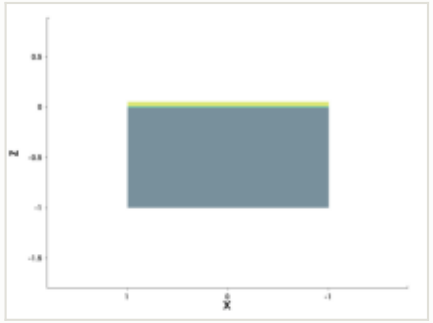

mask for this step

no mask for this step

steps by process area

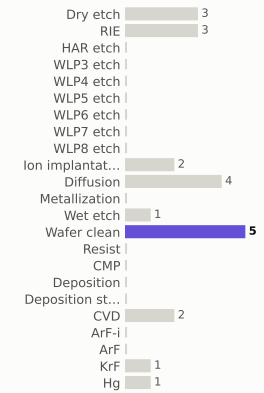

materials deposited (g)



gases emitted (g)



Step #270: Hg

litho_patterning · Hg

0.199	40.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

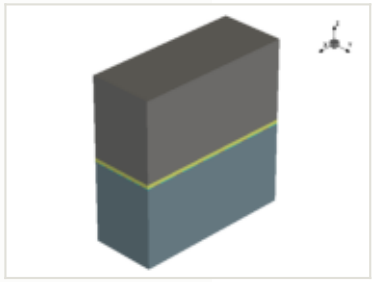

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

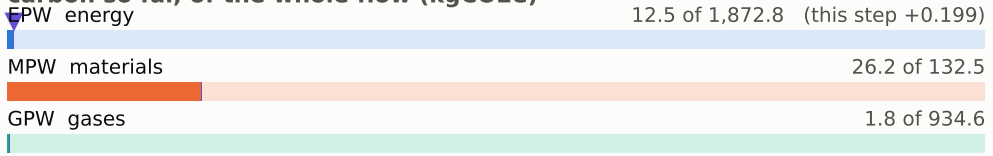

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

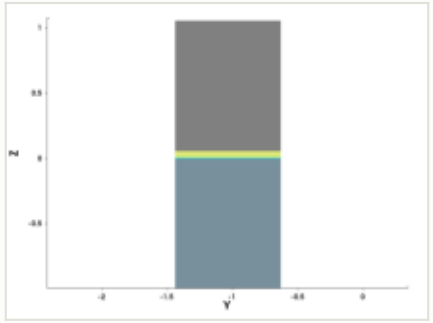

y cut at -1.035 µm

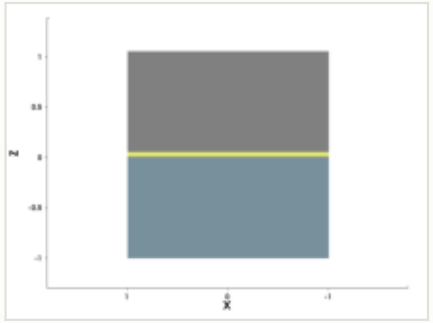

mask: layer 3:0, positive (OASIS)

steps by process area

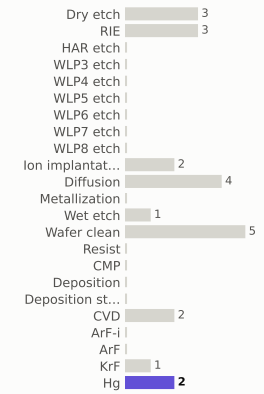

materials deposited (g)



gases emitted (g)



Step #280: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	41.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

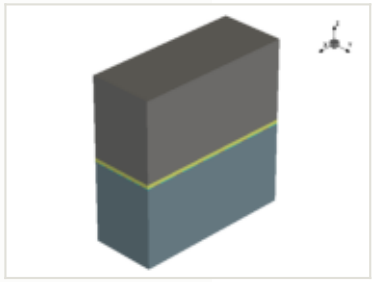

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

EPW energy 13.3 of 1,872.8 (this step +0.801)

MPW materials 26.2 of 132.5

GPW gases 1.8 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

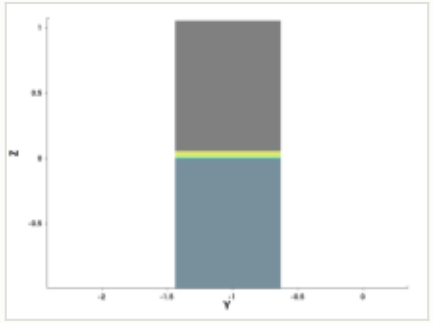

y cut at -1.035 µm

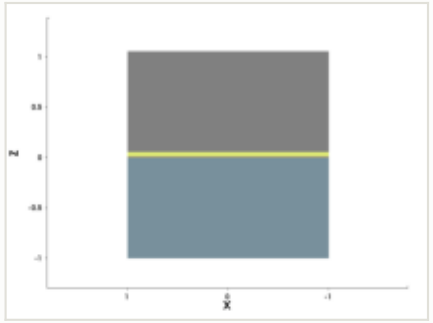

mask for this step

no mask for this step

steps by process area

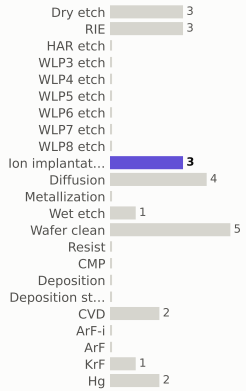

materials deposited (g)



gases emitted (g)

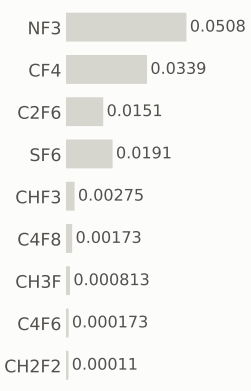

Step #290: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	42.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

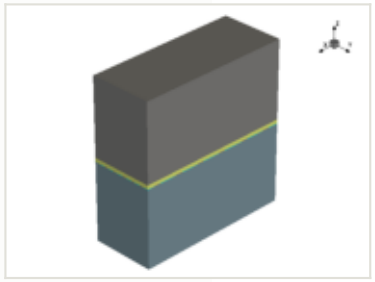

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

EPW energy 14.1 of 1,872.8 (this step +0.801)

MPW materials 26.2 of 132.5

GPW gases 1.8 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

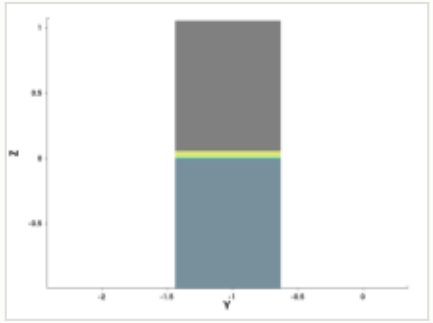

y cut at -1.035 µm

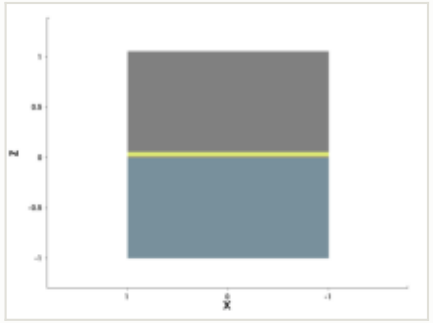

mask for this step

no mask for this step

steps by process area

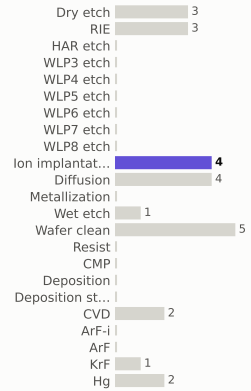

materials deposited (g)



gases emitted (g)

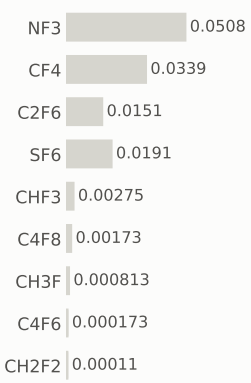

Step #300: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	43	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

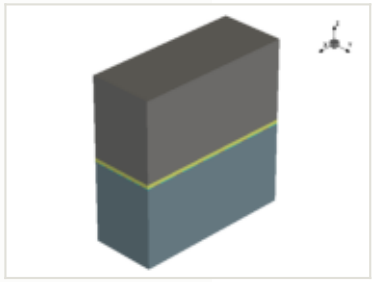

x cut at 0.000 µm

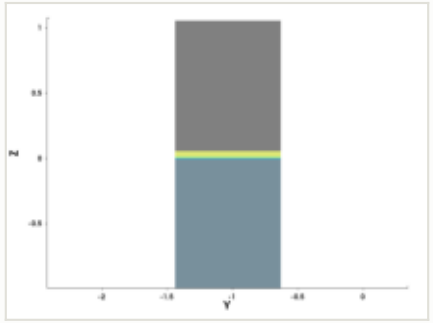

y cut at -1.035 µm

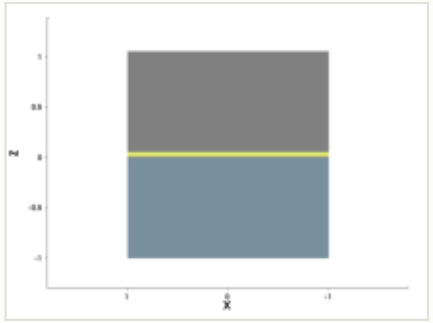

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

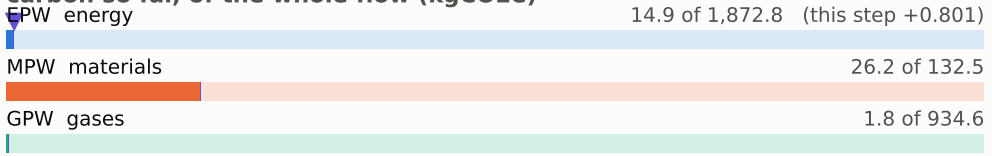

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

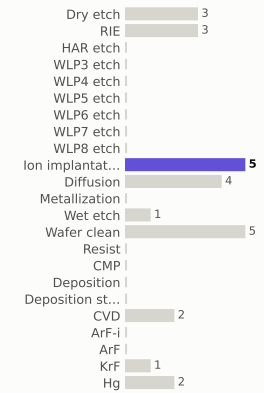

materials deposited (g)



gases emitted (g)



Step #310: Dry_etch

etch_strip · Dry_etch

0.801	43.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

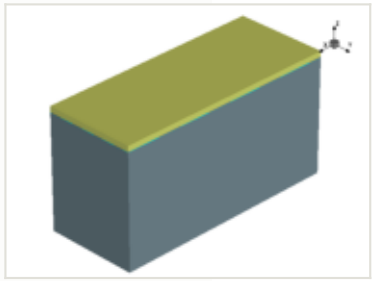

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GPW	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

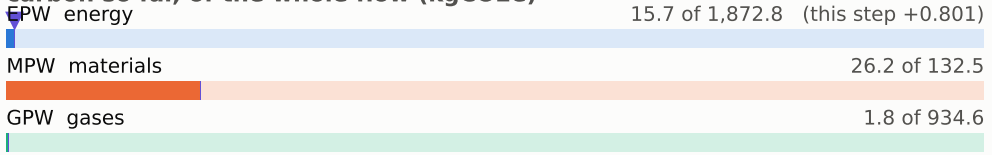

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

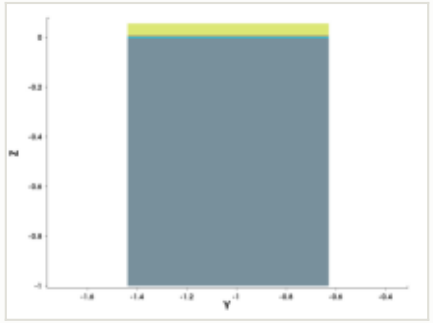

y cut at -1.035 µm

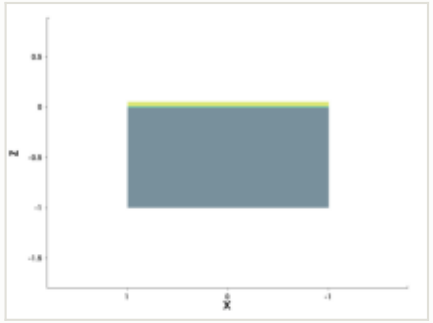

mask for this step

no mask for this step

steps by process area

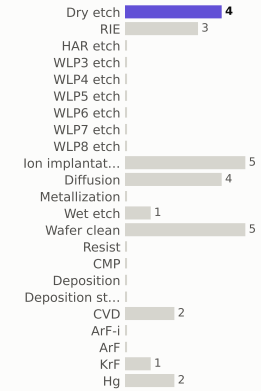

materials deposited (g)



gases emitted (g)

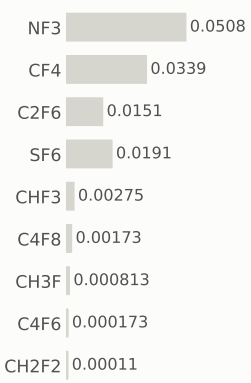

Step #320: Wafer_clean

clean · Wafer_clean

0.169	43.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

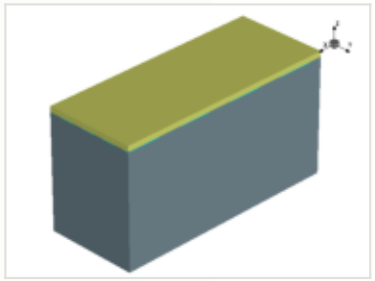

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

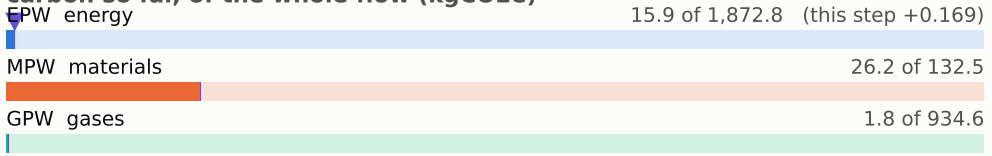

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

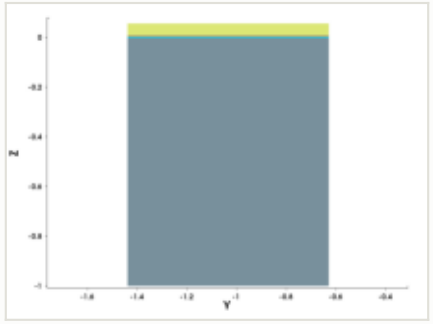

y cut at -1.035 µm

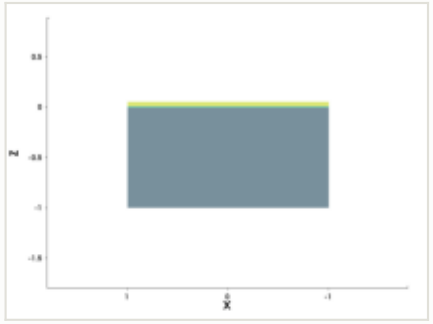

mask for this step

no mask for this step

steps by process area

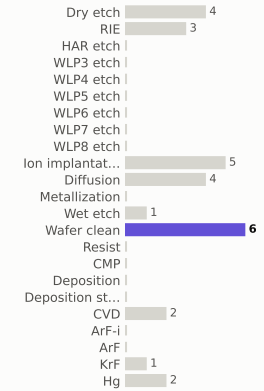

materials deposited (g)



gases emitted (g)

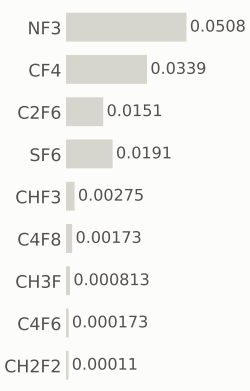

Step #330: Hg

litho_patterning · Hg

0.199	44.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

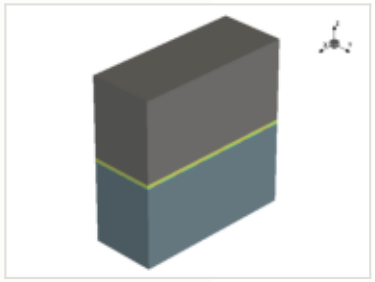

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

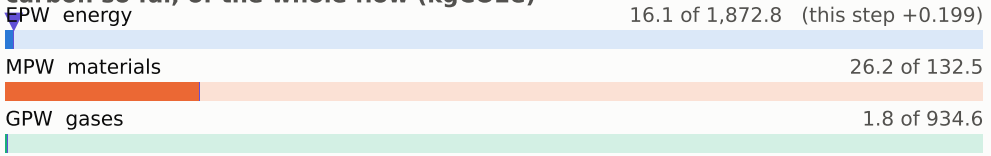

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

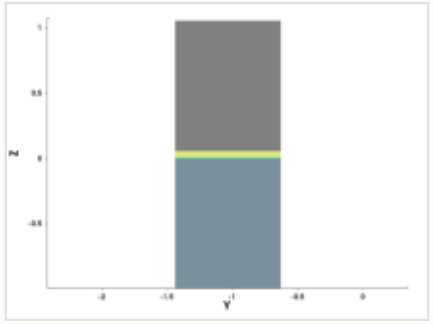

y cut at -1.035 µm

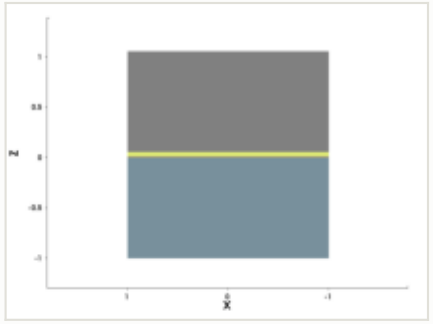

mask: layer 4:0, positive (OASIS)

steps by process area

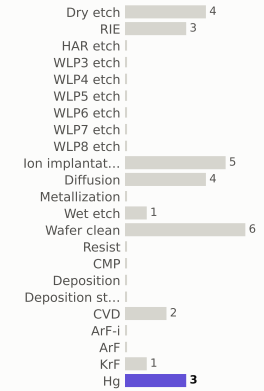

materials deposited (g)



gases emitted (g)

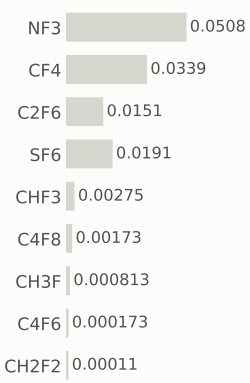

Step #340: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	44.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

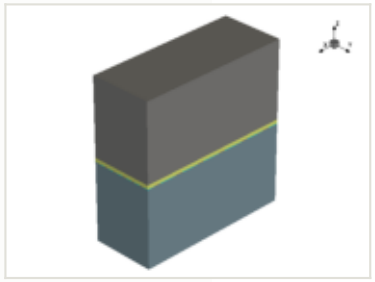

x cut at 0.000 µm

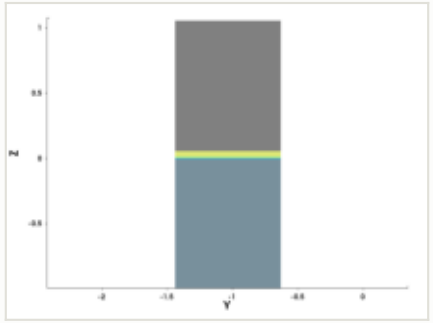

y cut at -1.035 µm

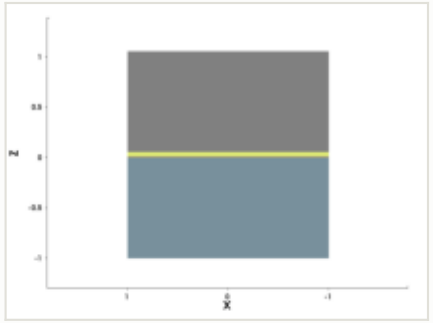

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

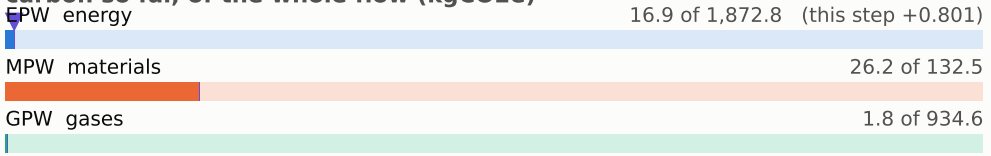

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

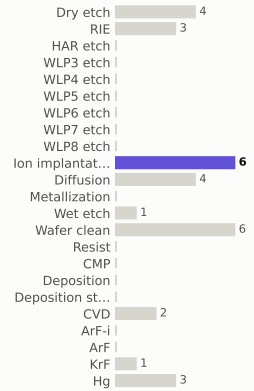

materials deposited (g)



gases emitted (g)

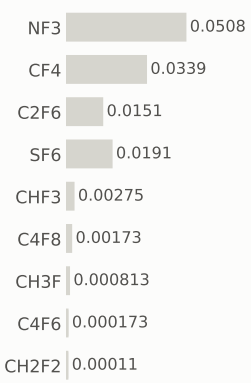

Step #350: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	45.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

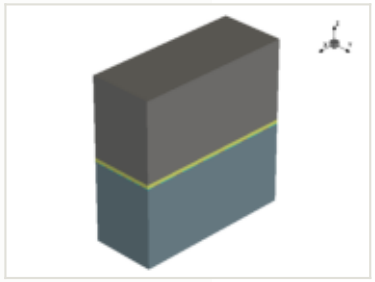

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

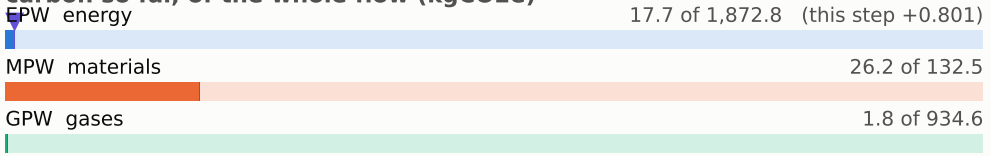

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

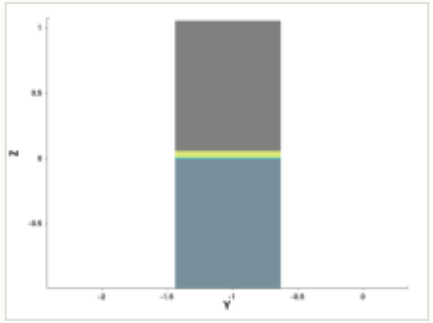

y cut at -1.035 µm

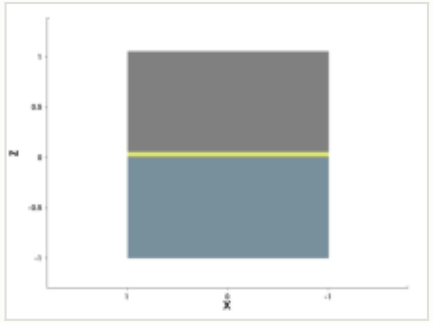

mask for this step

no mask for this step

steps by process area

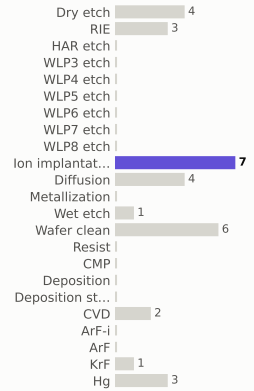

materials deposited (g)



gases emitted (g)

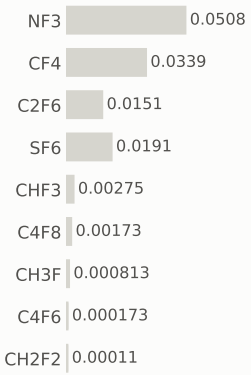

Step #360: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	46.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

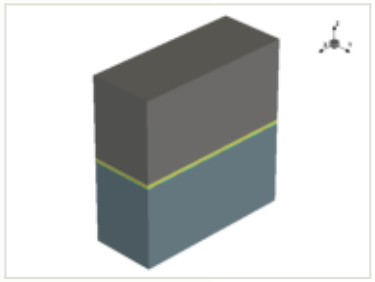

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

EPW energy — 18.5 of 1,872.8 (this step +0.801)

MPW materials — 26.2 of 132.5

GPW gases — 1.8 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

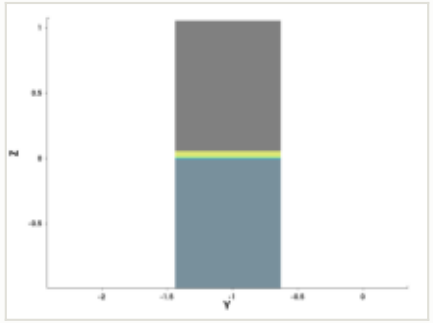

y cut at -1.035 µm

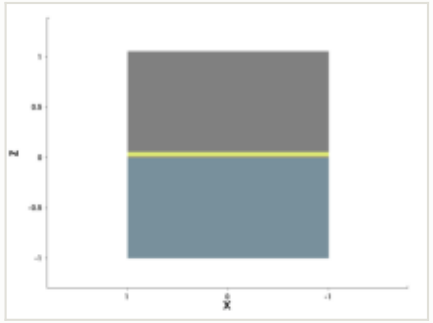

mask for this step

no mask for this step

steps by process area

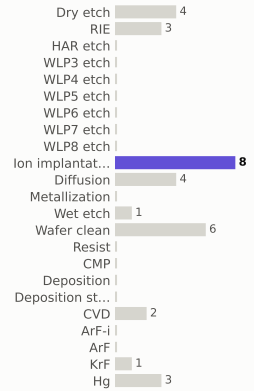

materials deposited (g)



gases emitted (g)

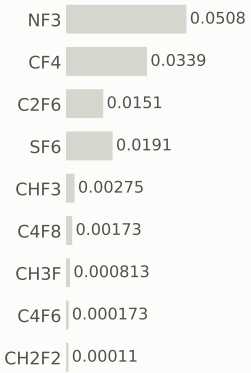

Step #370: Dry_etch

etch_strip · Dry_etch

0.801	47.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

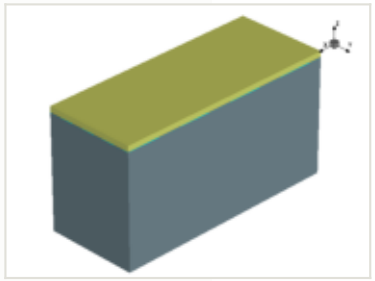

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

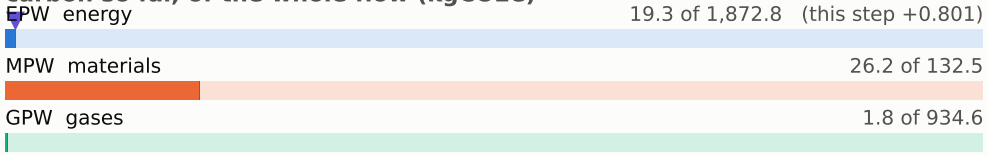

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

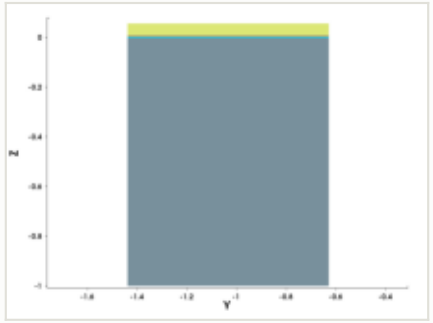

y cut at -1.035 µm

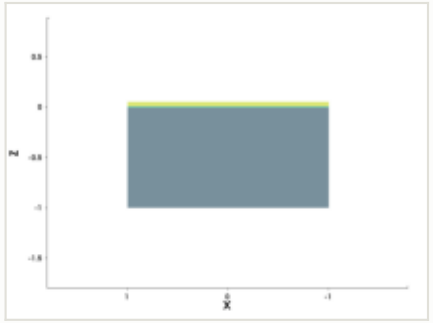

mask for this step

no mask for this step

steps by process area

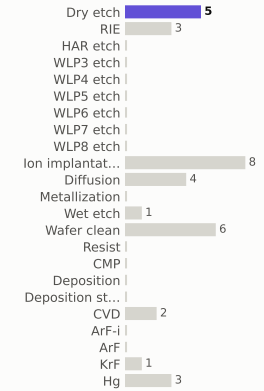

materials deposited (g)



gases emitted (g)

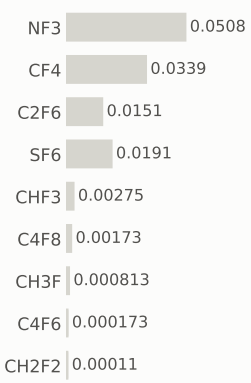

Step #380: Wafer_clean

clean · Wafer_clean

0.169	47.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

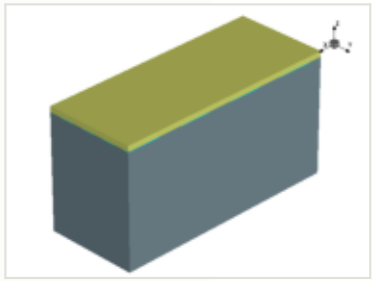

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

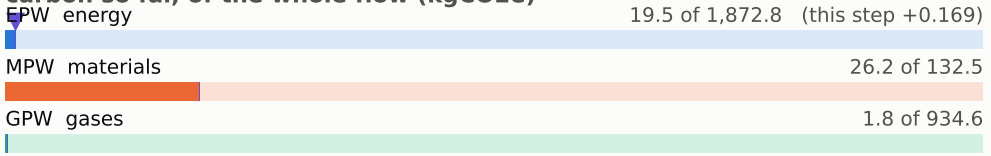

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

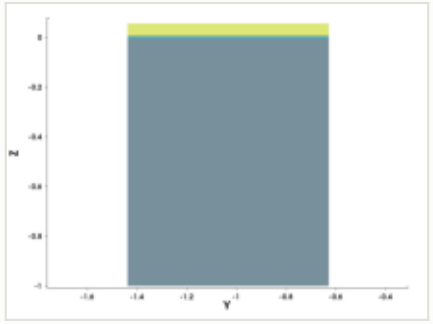

y cut at -1.035 µm

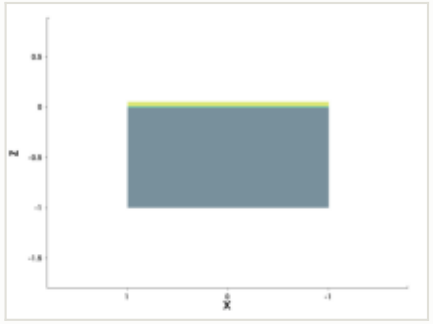

mask for this step

no mask for this step

steps by process area

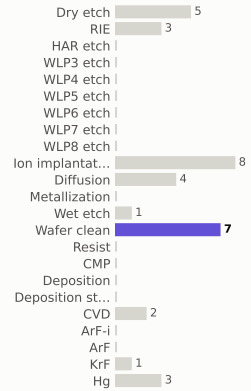

materials deposited (g)



gases emitted (g)

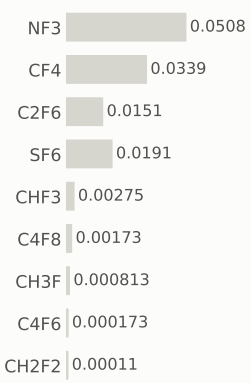

Step #390: Hg

litho_patterning · Hg

0.199	47.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

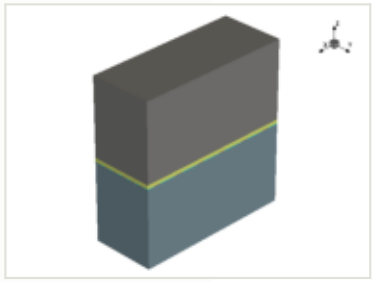

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

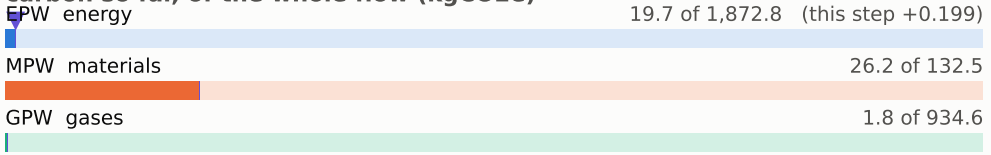

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

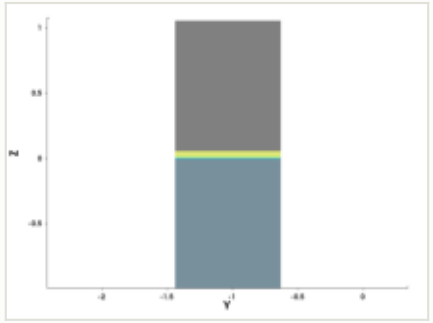

y cut at -1.035 µm

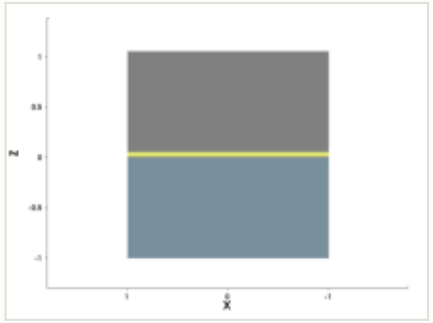

mask: layer 5:0, positive (OASIS)

steps by process area

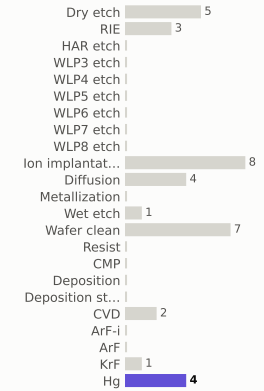

materials deposited (g)



gases emitted (g)

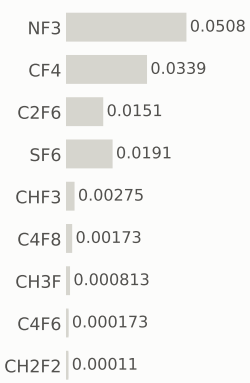

Step #400: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	48.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

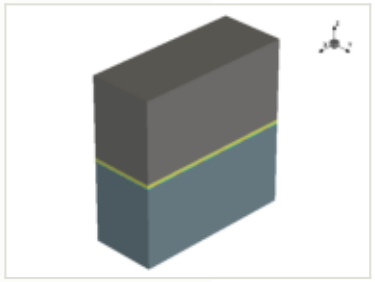

x cut at 0.000 µm

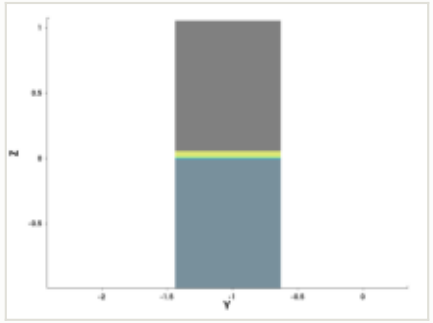

y cut at -1.035 µm

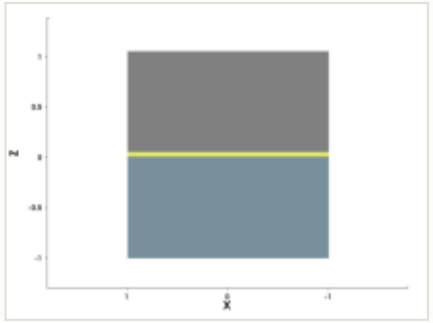

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

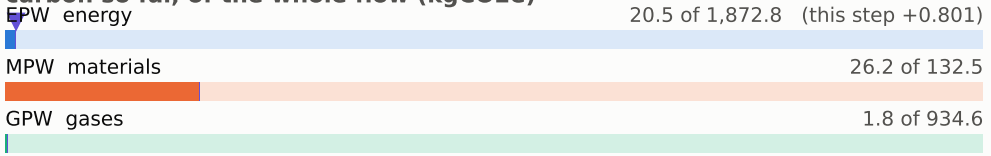

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

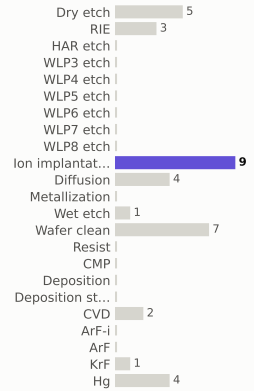

materials deposited (g)



gases emitted (g)

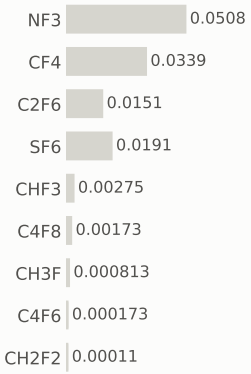

Step #410: Dry_etch

etch_strip · Dry_etch

0.801	49.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

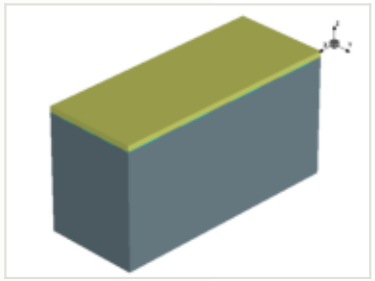

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

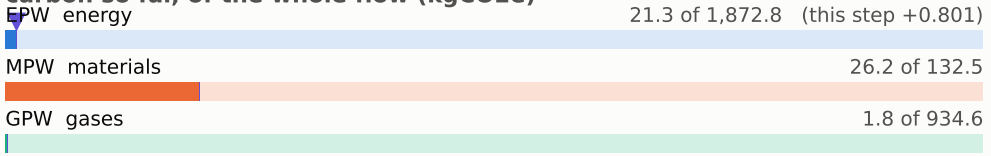

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

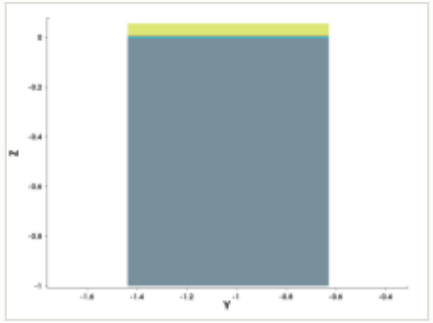

y cut at -1.035 µm

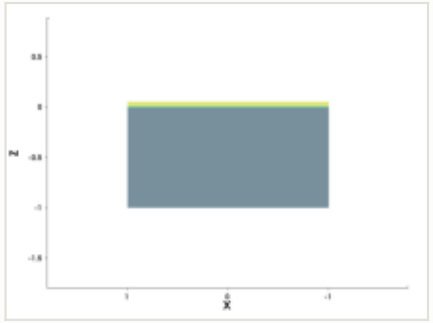

mask for this step

no mask for this step

steps by process area

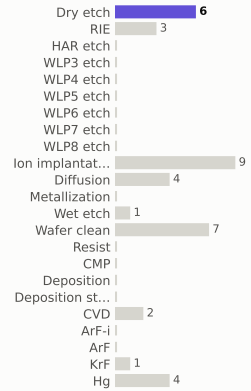

materials deposited (g)



gases emitted (g)

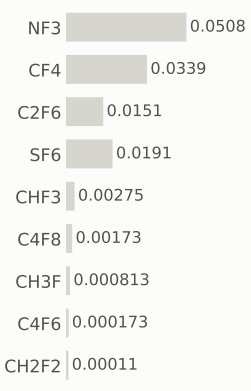

Step #420: Wafer_clean

clean · Wafer_clean

0.169	49.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

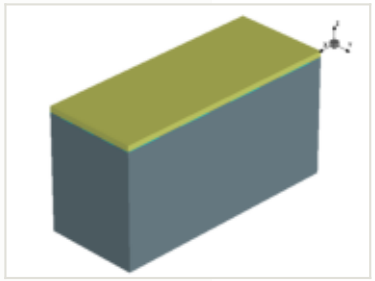

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

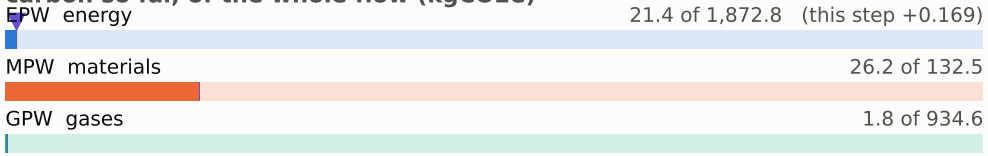

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

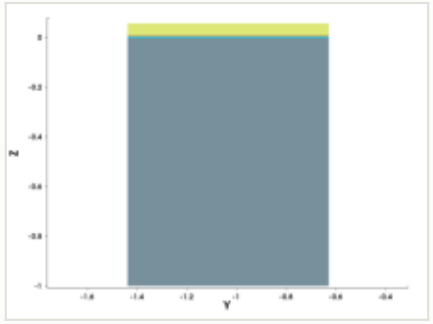

y cut at -1.035 µm

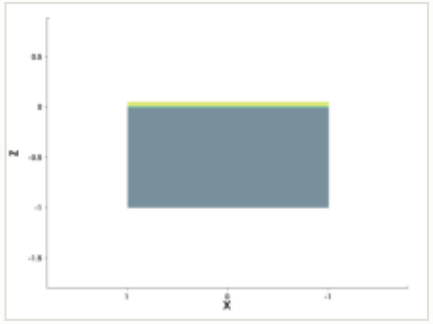

mask for this step

no mask for this step

steps by process area

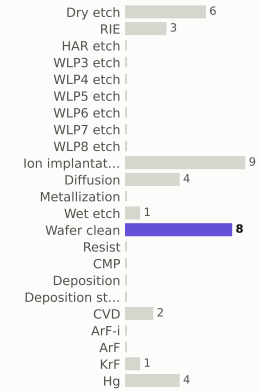

materials deposited (g)



gases emitted (g)

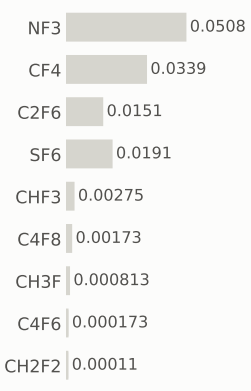

Step #430: Hg

litho_patterning · Hg

0.199	49.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

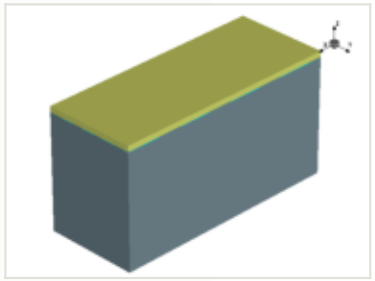

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

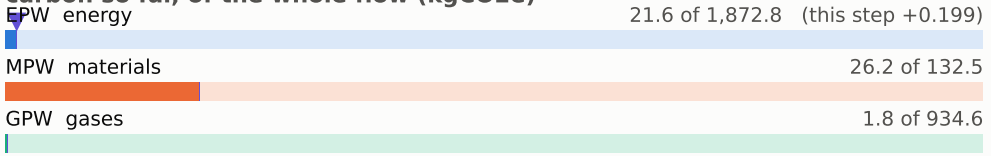

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

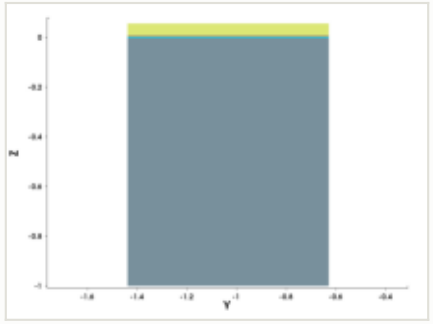

y cut at -1.035 µm

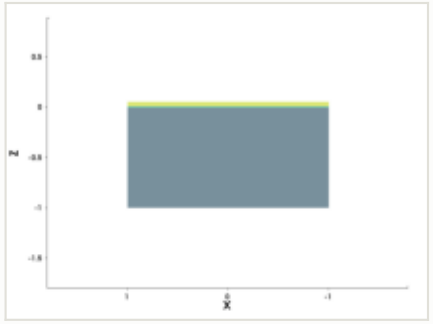

mask: layer 6:0 (OASIS)

steps by process area

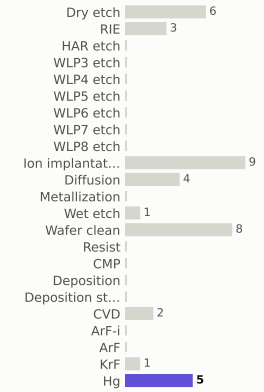

materials deposited (g)



gases emitted (g)

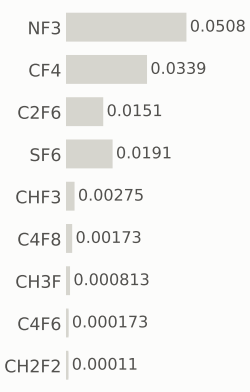

Step #440: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	50.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

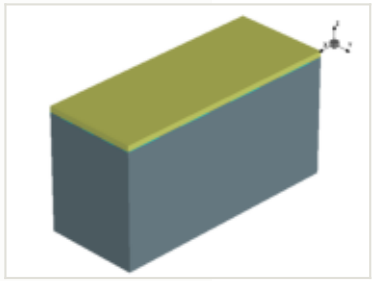

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

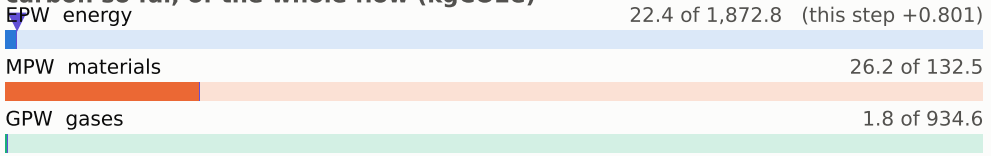

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

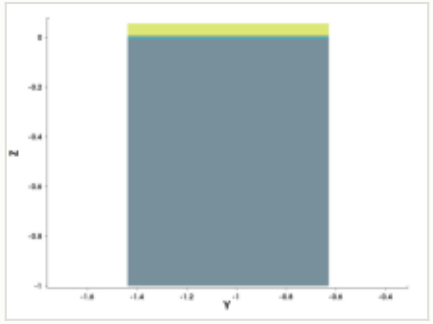

y cut at -1.035 µm

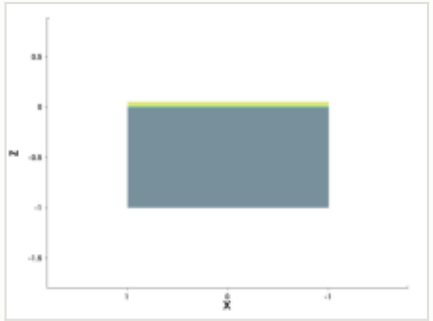

mask for this step

no mask for this step

steps by process area

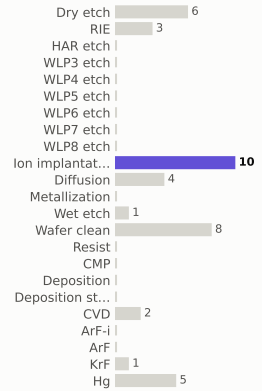

materials deposited (g)



gases emitted (g)

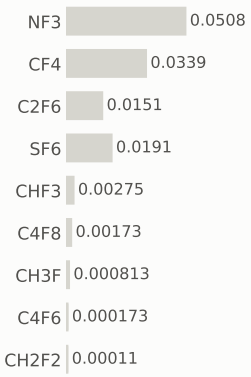

Step #450: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	51.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

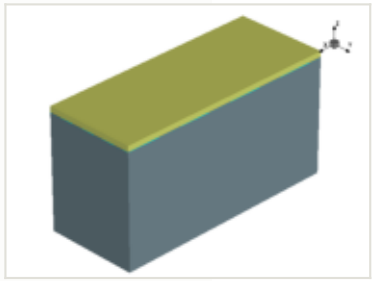

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

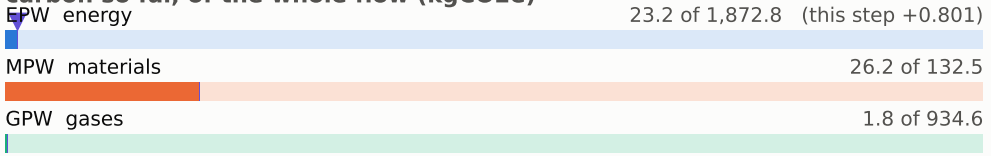

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

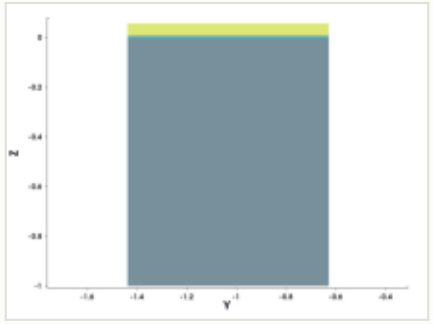

y cut at -1.035 µm

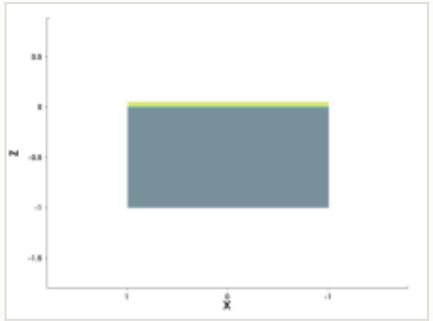

mask for this step

no mask for this step

steps by process area

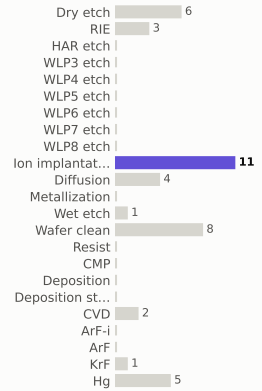

materials deposited (g)



gases emitted (g)

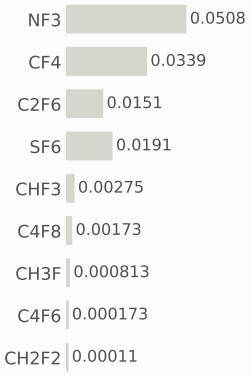

Step #460: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	52.1	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

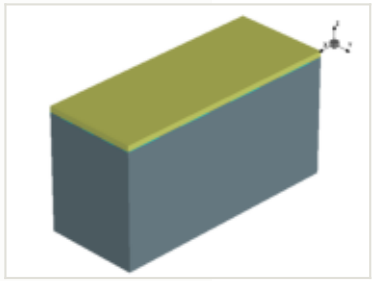

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

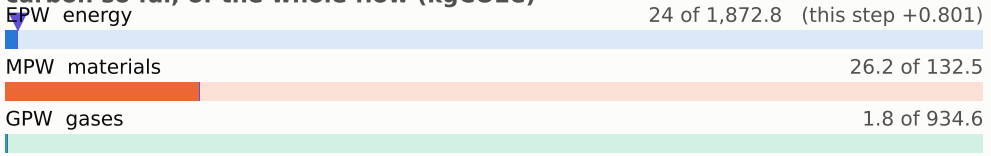

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

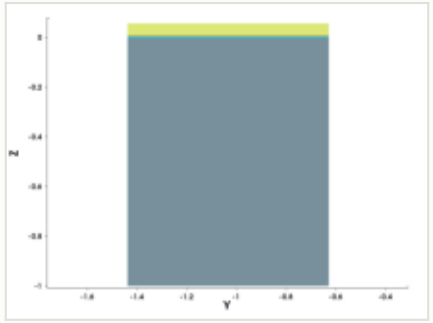

y cut at -1.035 µm

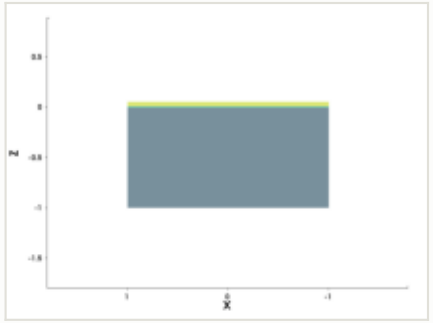

mask for this step

no mask for this step

steps by process area

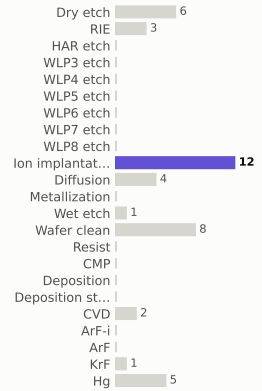

materials deposited (g)



gases emitted (g)

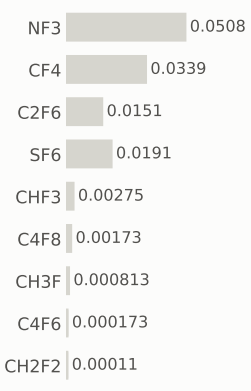

Step #470: Dry_etch

etch_strip · Dry_etch

0.801	52.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

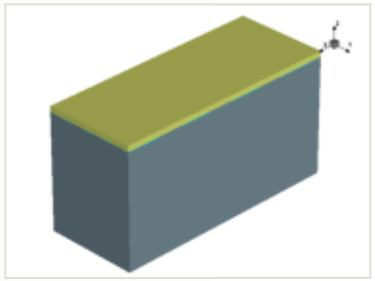

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

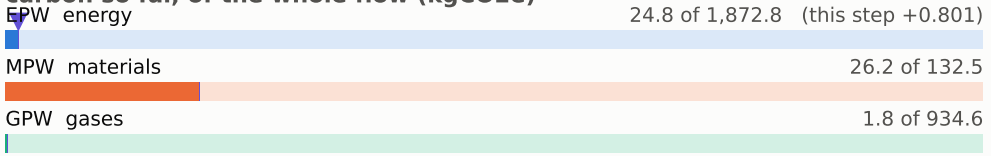

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

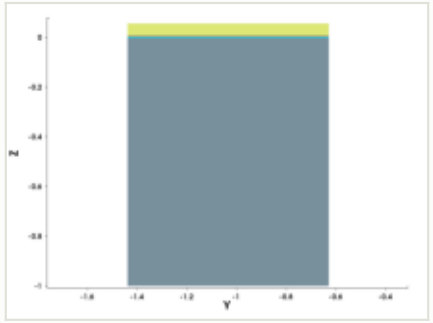

y cut at -1.035 µm

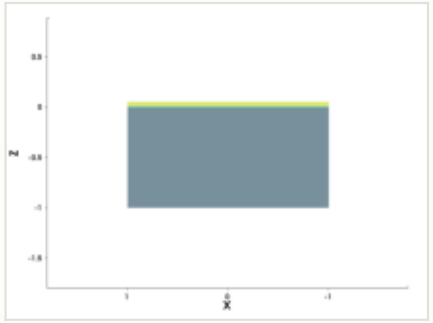

mask for this step

no mask for this step

steps by process area

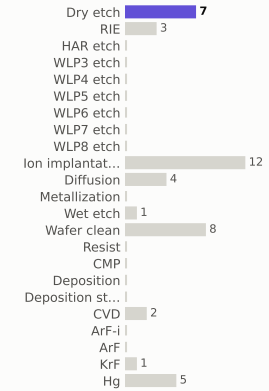

materials deposited (g)



gases emitted (g)

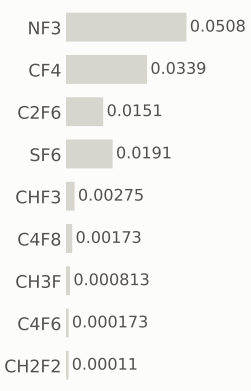

Step #480: Wafer_clean

clean · Wafer_clean

0.169	53	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

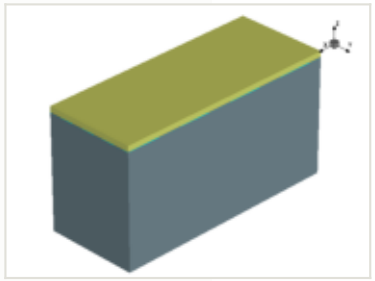

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

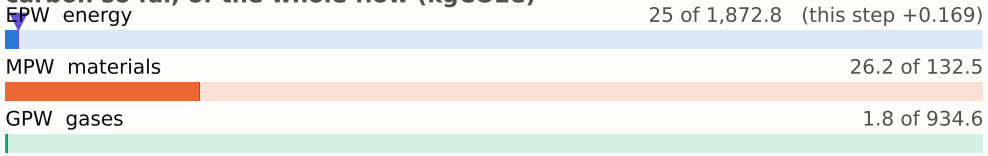

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

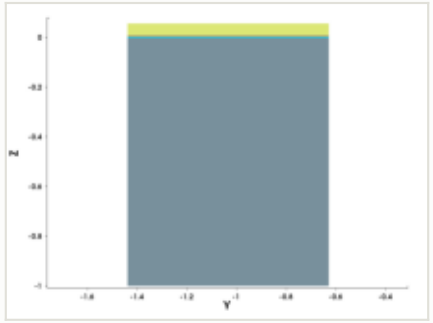

y cut at -1.035 µm

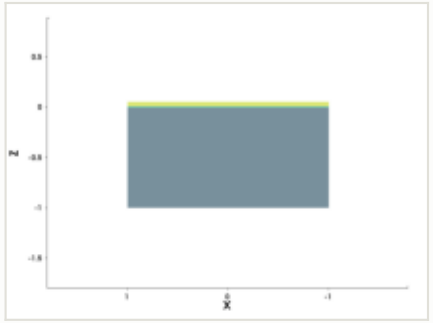

mask for this step

no mask for this step

steps by process area

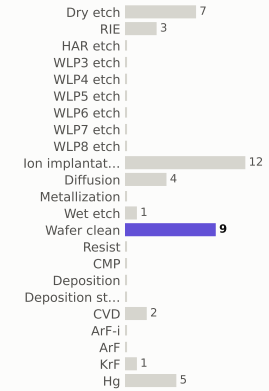

materials deposited (g)



gases emitted (g)

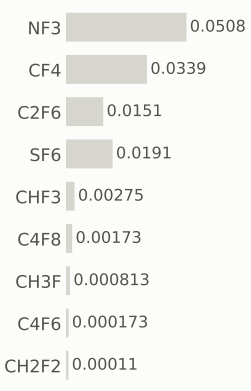

Step #490: Hg

litho_patterning · Hg

0.199	53.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

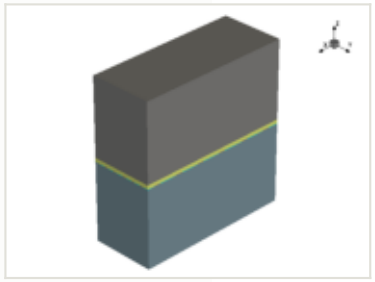

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

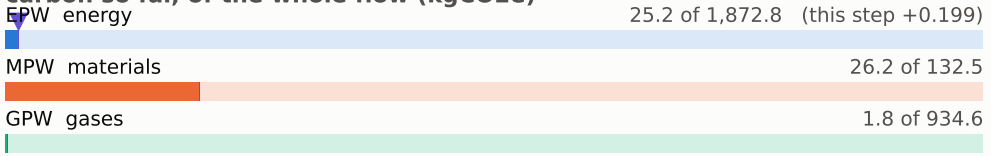

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

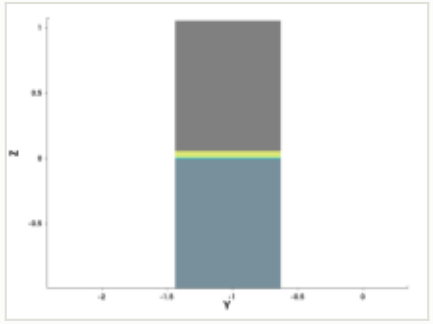

y cut at -1.035 µm

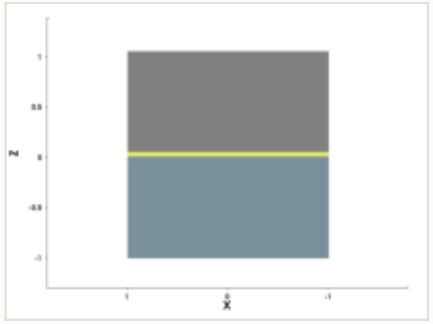

mask: layer 7:0, positive (OASIS)

steps by process area

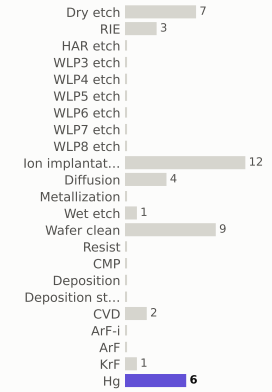

materials deposited (g)



gases emitted (g)

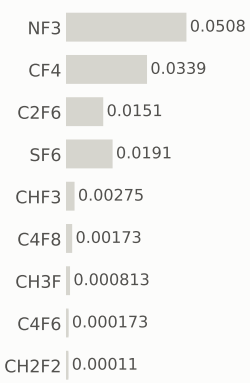

Step #500: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	54	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

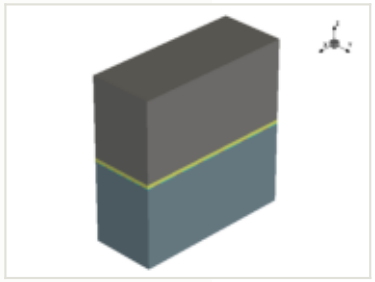

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

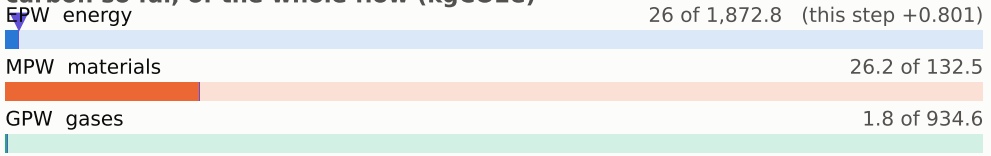

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

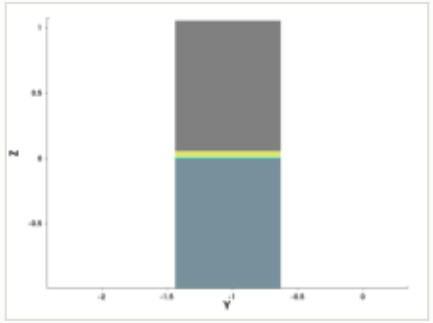

y cut at -1.035 µm

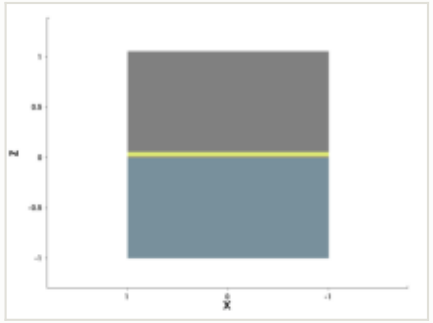

mask for this step

no mask for this step

steps by process area

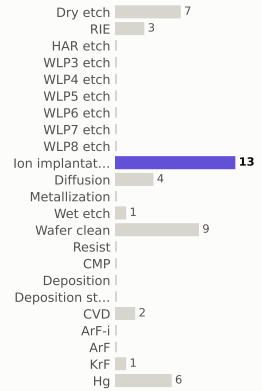

materials deposited (g)



gases emitted (g)

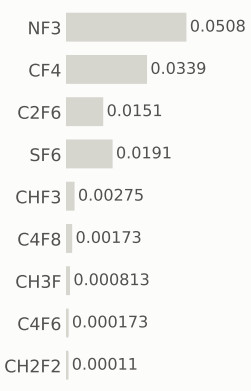

Step #510: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	54.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

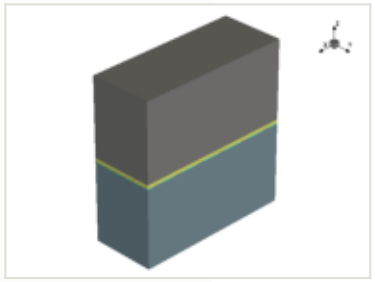

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

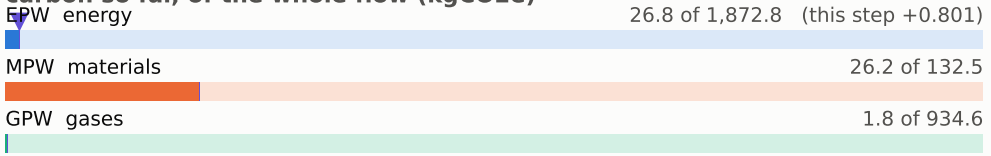

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

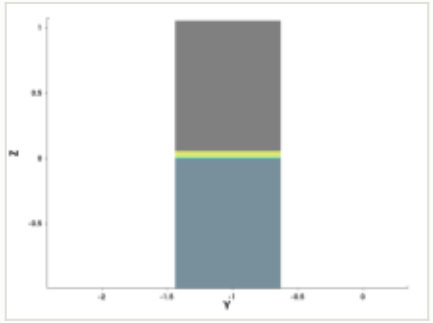

y cut at -1.035 µm

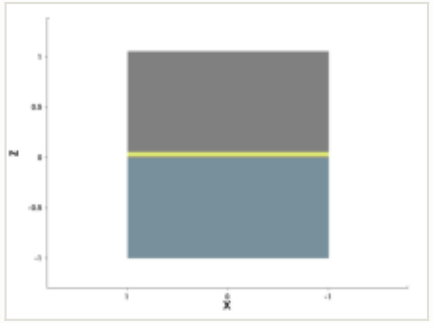

mask for this step

no mask for this step

steps by process area

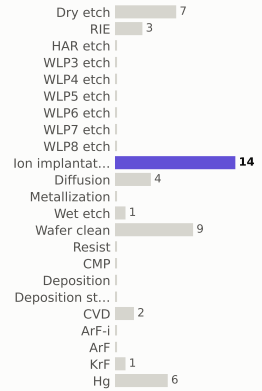

materials deposited (g)



gases emitted (g)

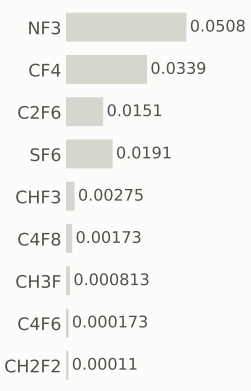

Step #520: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	55.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

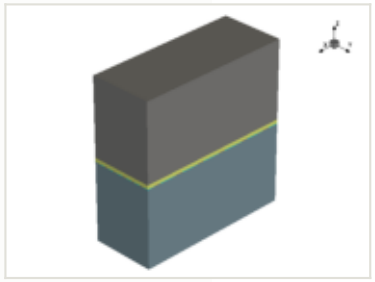

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

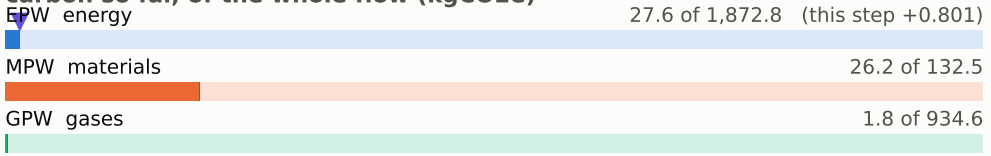

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

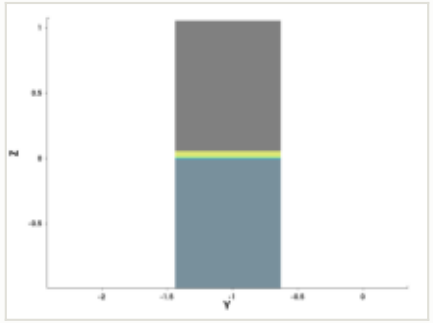

y cut at -1.035 µm

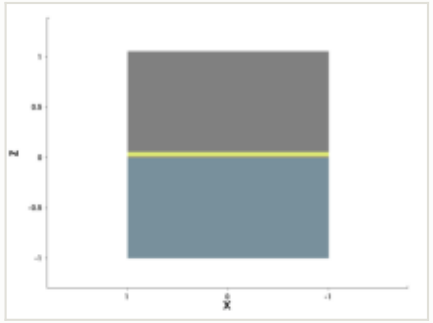

mask for this step

no mask for this step

steps by process area

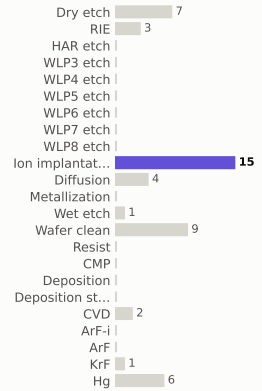

materials deposited (g)



gases emitted (g)

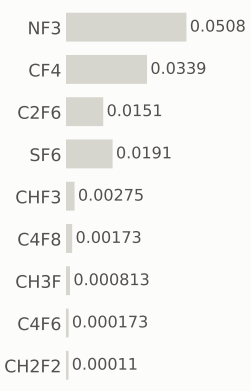

Step #530: Dry_etch

etch_strip · Dry_etch

0.801	56.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

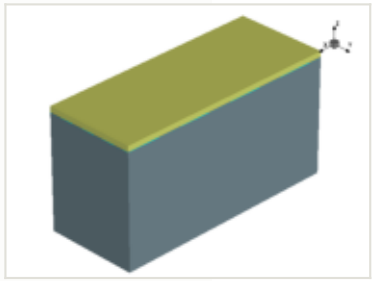

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

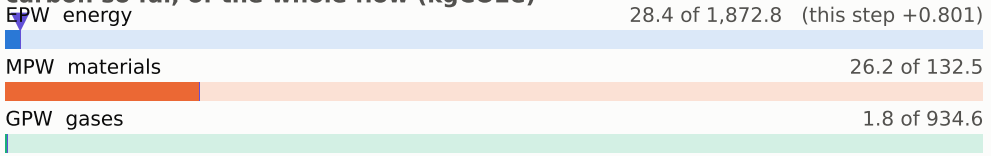

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

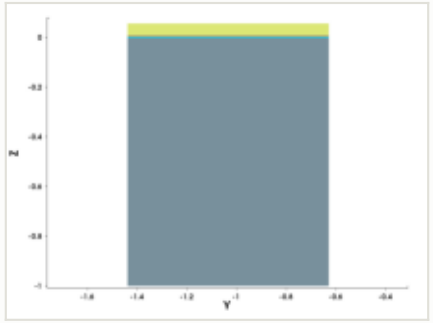

y cut at -1.035 µm

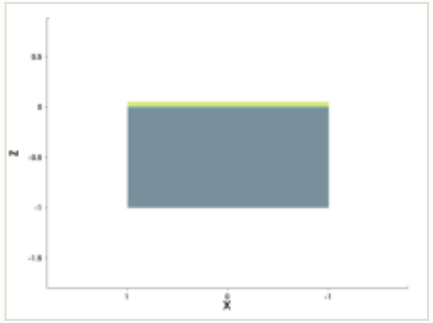

mask for this step

no mask for this step

steps by process area

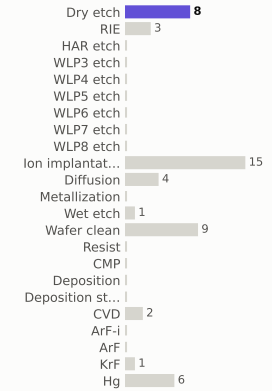

materials deposited (g)



gases emitted (g)

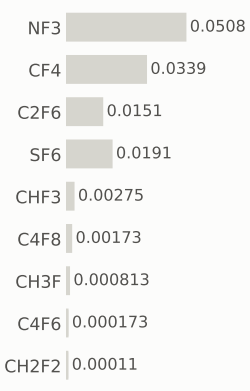

Step #540: Wafer_clean

clean · Wafer_clean

0.169	56.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

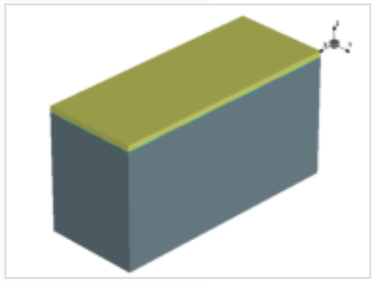

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

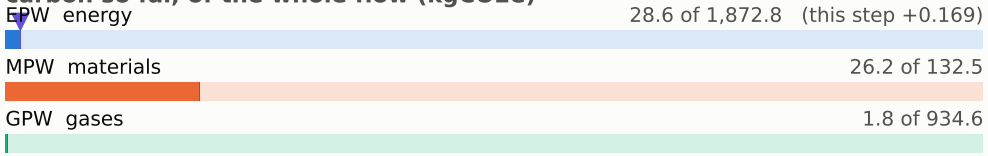

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

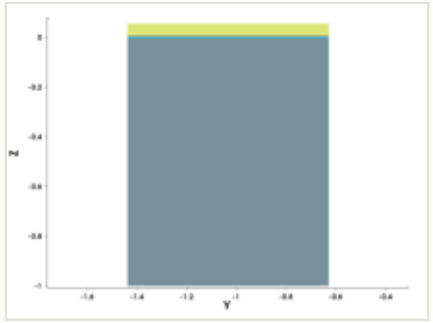

y cut at -1.035 µm

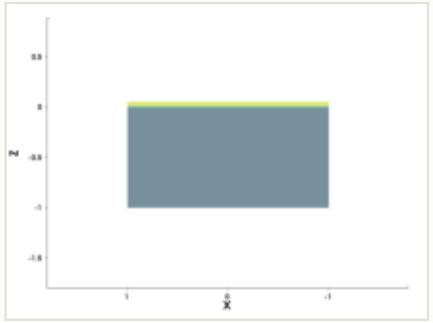

mask for this step

no mask for this step

steps by process area

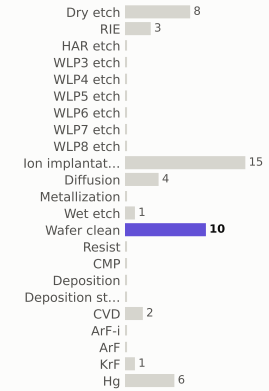

materials deposited (g)



gases emitted (g)

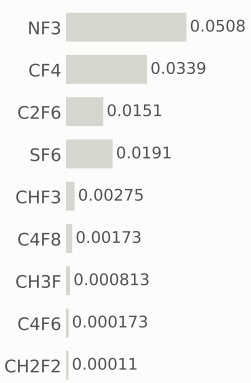

Step #550: Hg

litho_patterning · Hg

0.199	56.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

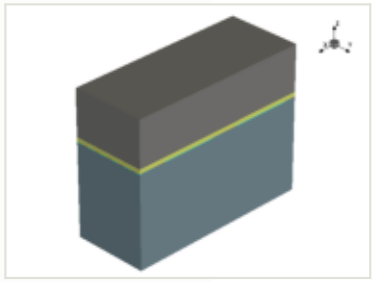

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

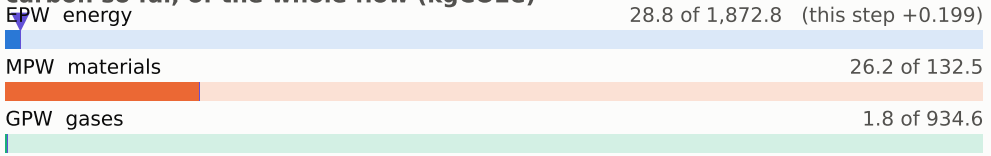

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

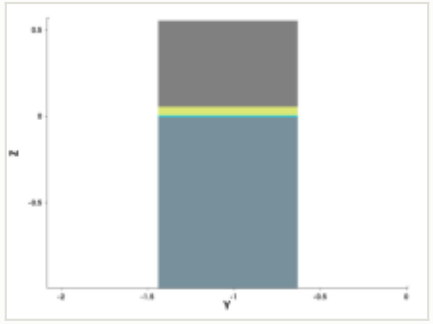

y cut at -1.035 µm

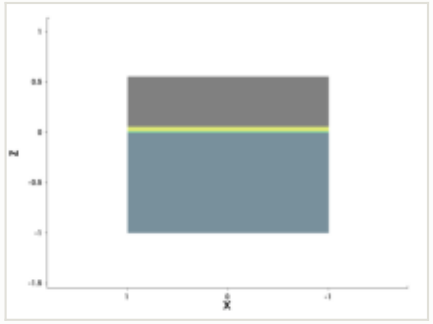

mask: layer 8:0, positive (OASIS)

steps by process area

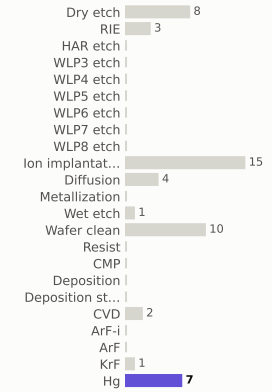

materials deposited (g)



gases emitted (g)

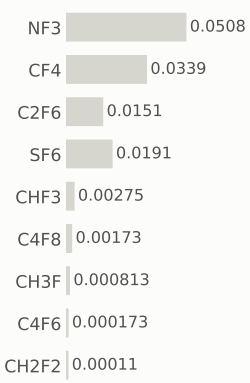

Step #560: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	57.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

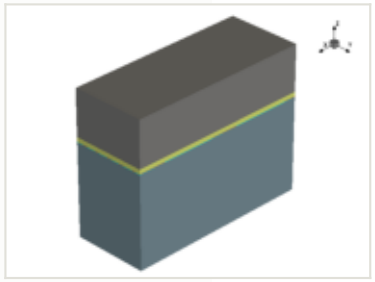

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

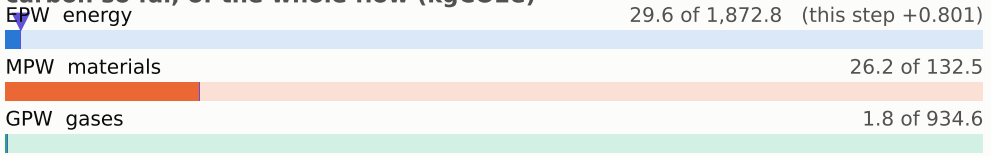

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

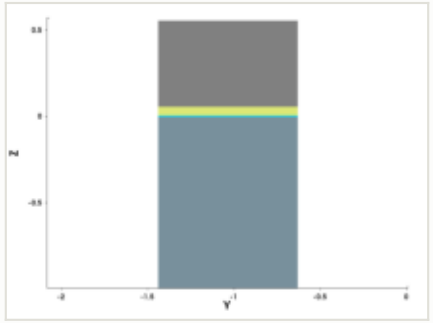

y cut at -1.035 µm

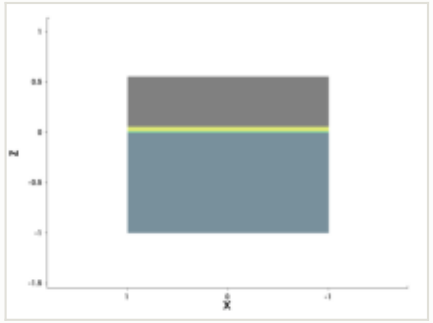

mask for this step

no mask for this step

steps by process area

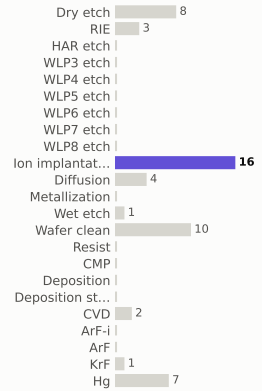

materials deposited (g)



gases emitted (g)

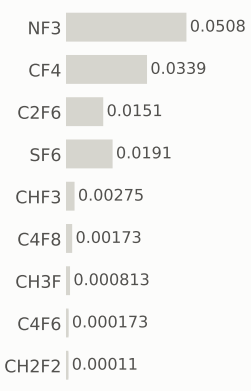

Step #570: Dry_etch

etch_strip · Dry_etch

0.801	58.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

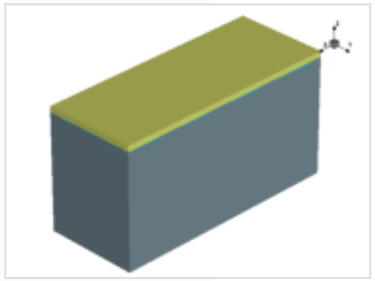

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

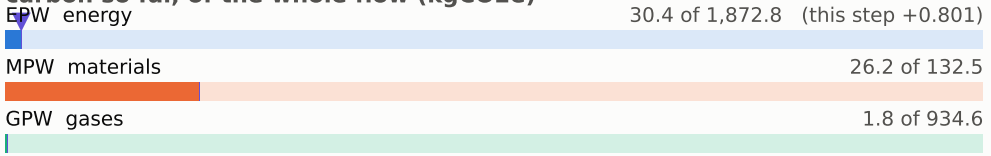

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

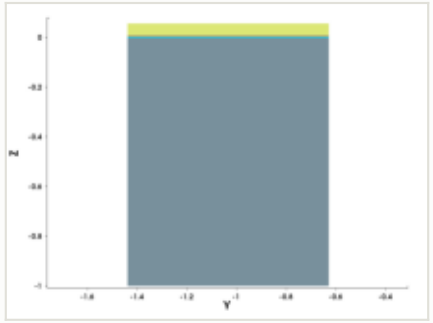

y cut at -1.035 µm

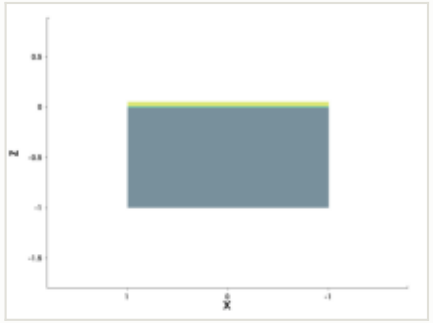

mask for this step

no mask for this step

steps by process area

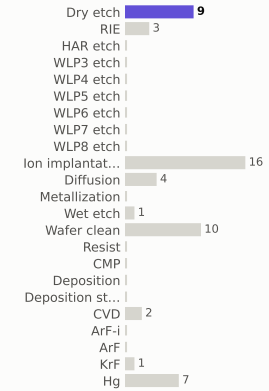

materials deposited (g)



gases emitted (g)

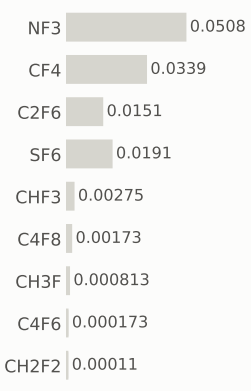

Step #580: Wafer_clean

clean · Wafer_clean

0.169	58.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

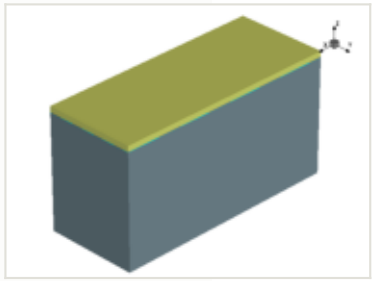

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

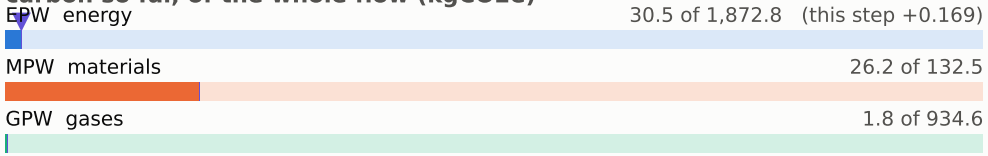

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

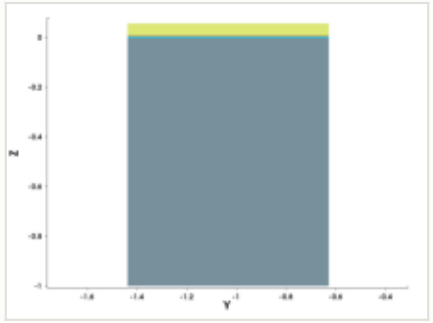

y cut at -1.035 µm

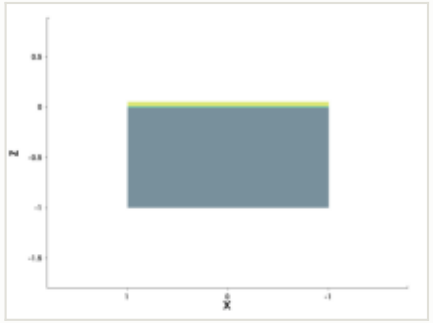

mask for this step

no mask for this step

steps by process area

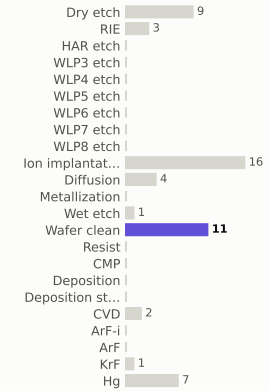

materials deposited (g)



gases emitted (g)

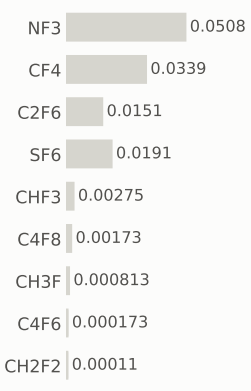

Step #590: Hg

litho_patterning · Hg

0.199	58.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

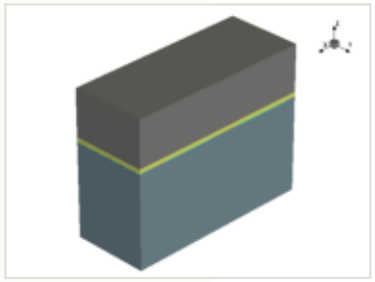

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

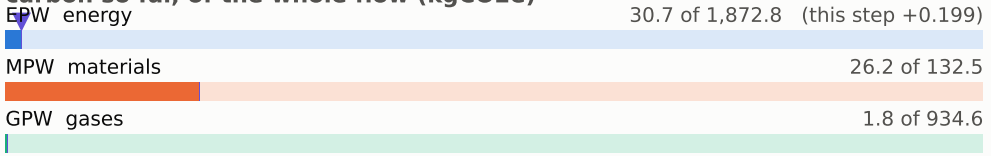

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

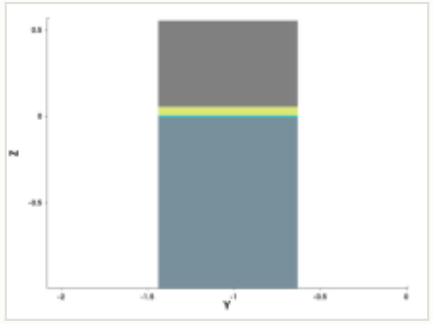

y cut at -1.035 µm

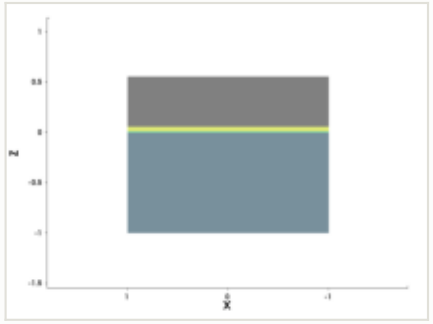

mask: layer 9:0, positive (OASIS)

steps by process area

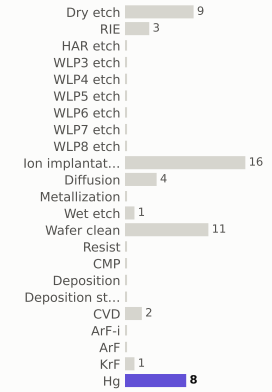

materials deposited (g)

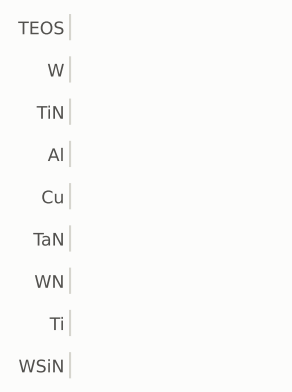

gases emitted (g)

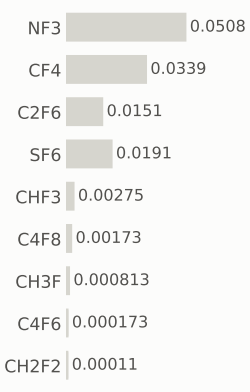

Step #600: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	59.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

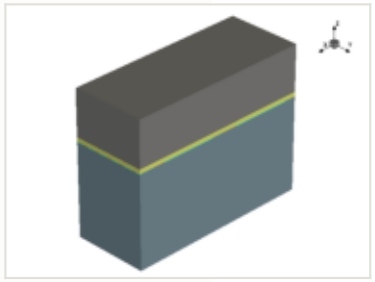

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

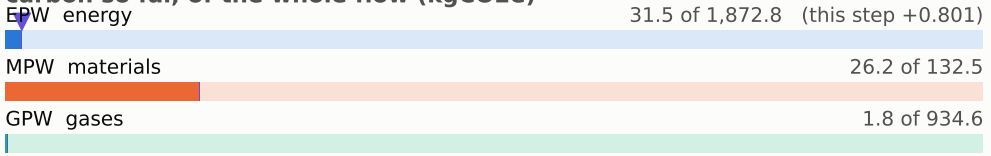

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

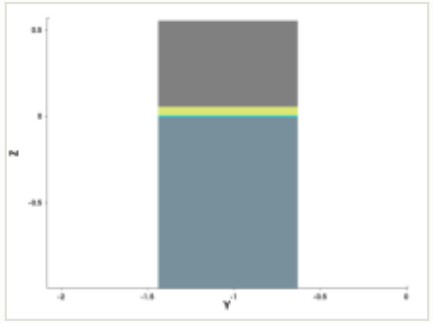

y cut at -1.035 µm

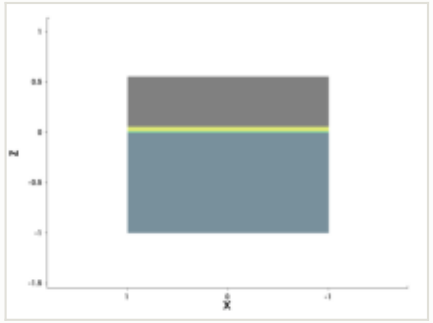

mask for this step

no mask for this step

steps by process area

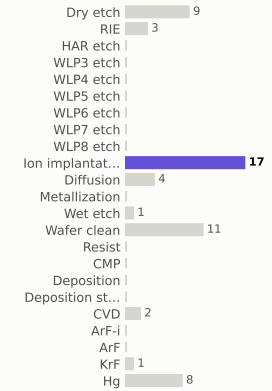

materials deposited (g)



gases emitted (g)

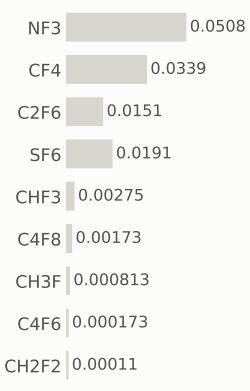

Step #610: Dry_etch

etch_strip · Dry_etch

0.801	60.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

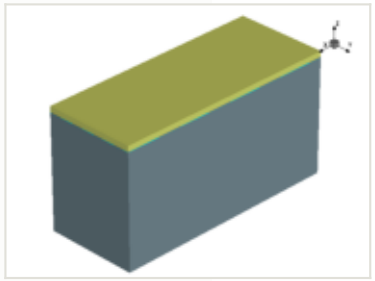

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

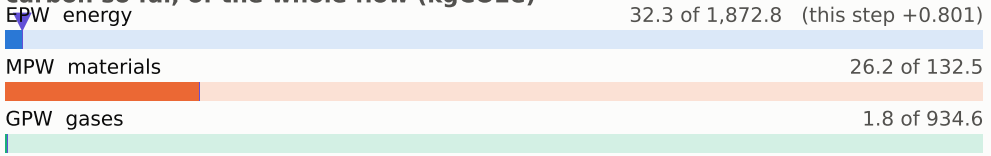

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

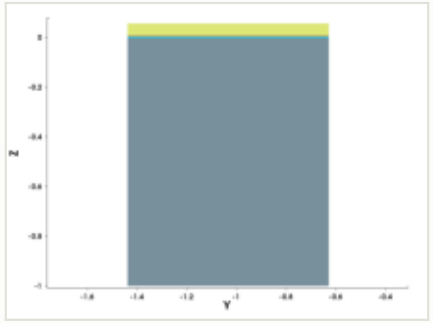

y cut at -1.035 µm

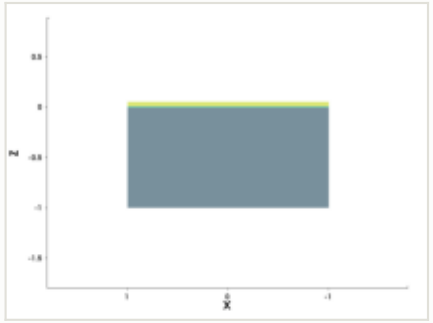

mask for this step

no mask for this step

steps by process area

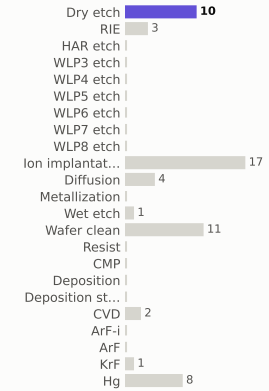

materials deposited (g)



gases emitted (g)

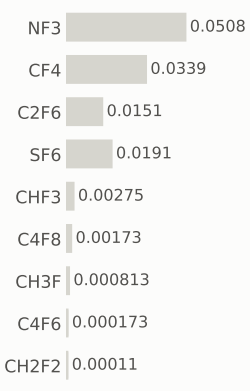

Step #620: Wafer_clean

clean · Wafer_clean

0.169	60.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

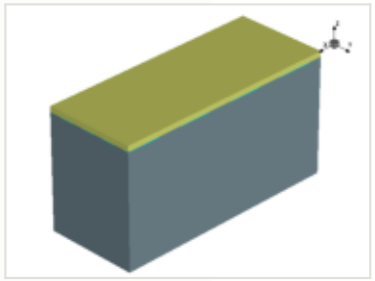

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

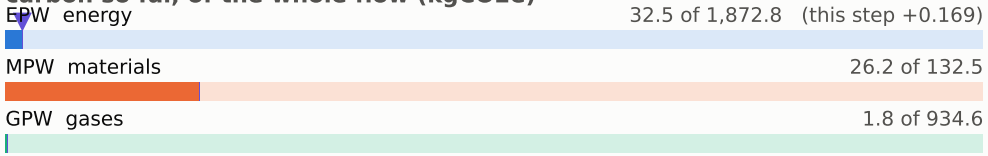

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

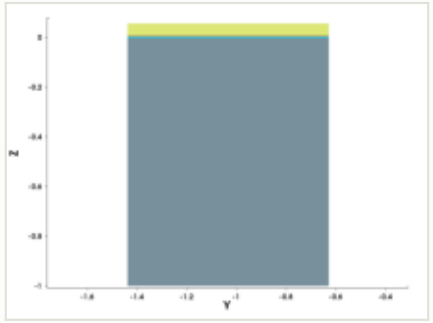

y cut at -1.035 µm

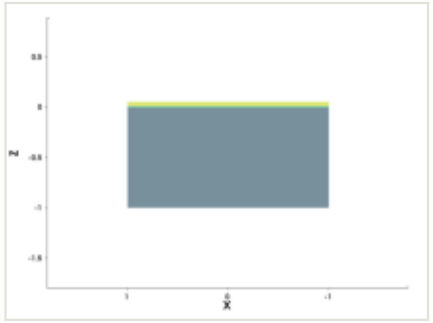

mask for this step

no mask for this step

steps by process area

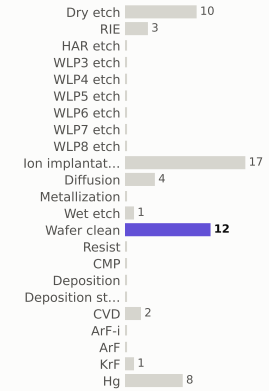

materials deposited (g)



gases emitted (g)

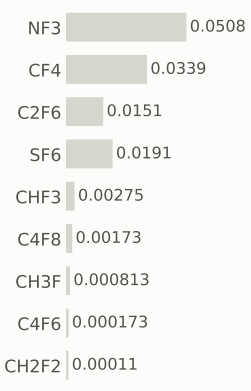

Step #640: ArF

litho_patterning · ArF

0.199	60.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

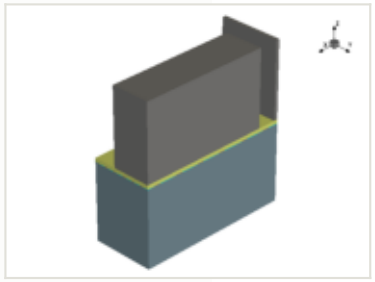

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

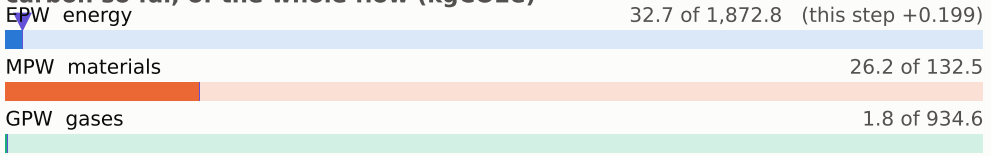

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

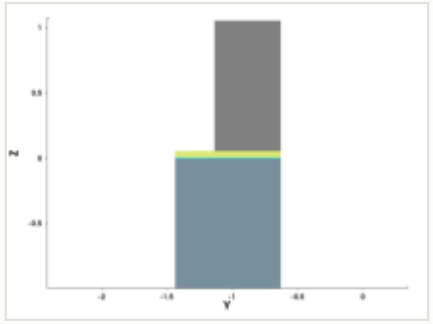

y cut at -1.035 µm

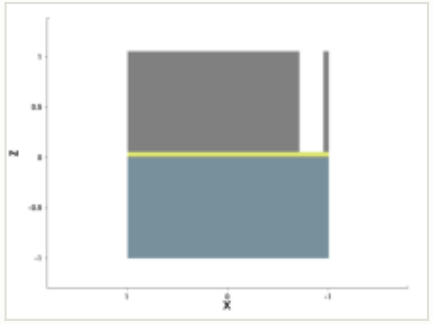

mask: layer 10:0, positive (OASIS)

steps by process area

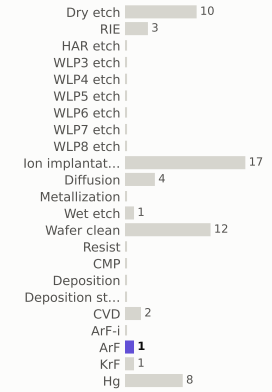

materials deposited (g)



gases emitted (g)

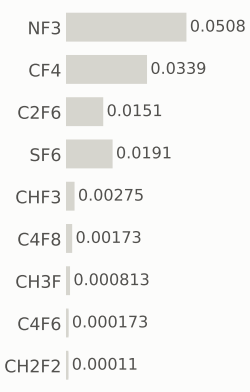

Step #650: RIE

etch_anisotropic · RIE

1.04	61.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

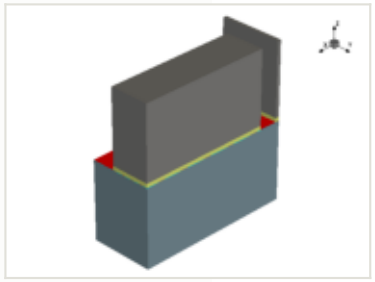

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

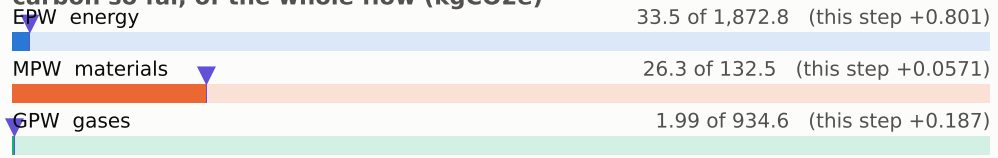

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

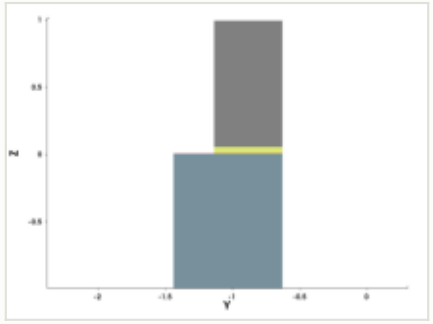

y cut at -1.035 µm

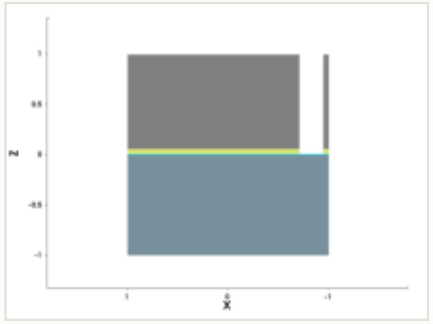

mask for this step

no mask for this step

steps by process area

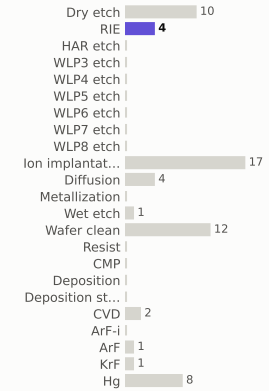

materials deposited (g)



gases emitted (g)

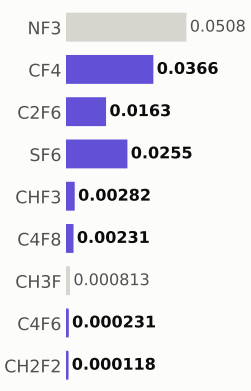

Step #660: RIE

etch_anisotropic · RIE

1.04	62.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

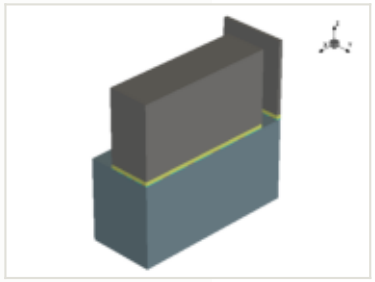

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

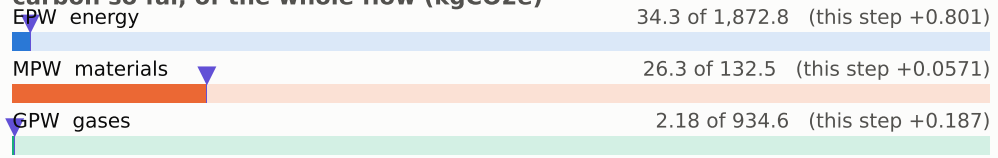

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

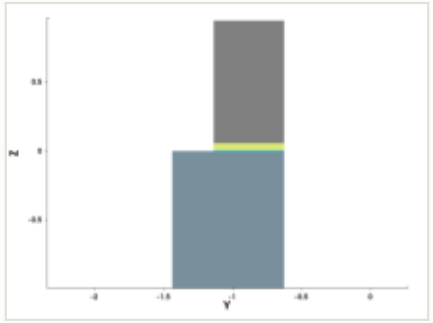

y cut at -1.035 µm

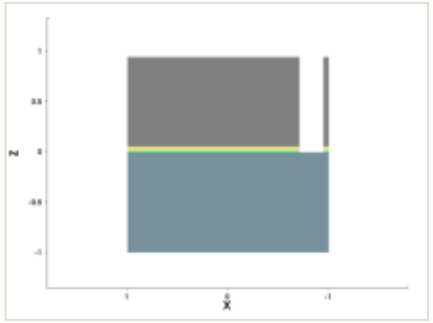

mask for this step

no mask for this step

steps by process area

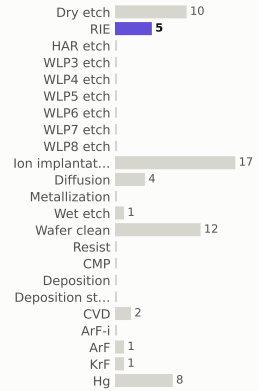

materials deposited (g)



gases emitted (g)

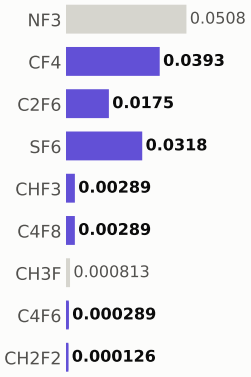

Step #670: RIE

etch_anisotropic · RIE

1.04	63.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

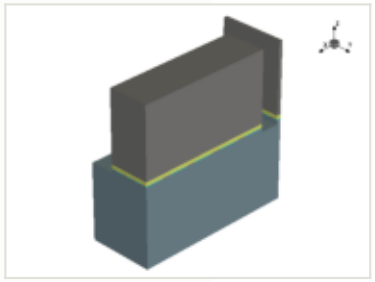

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

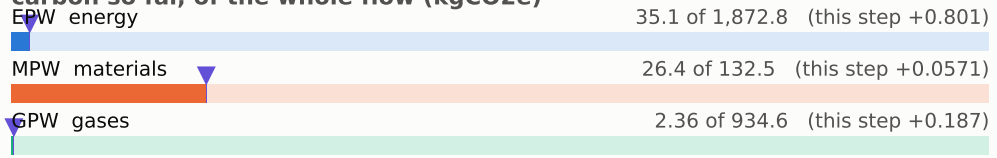

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

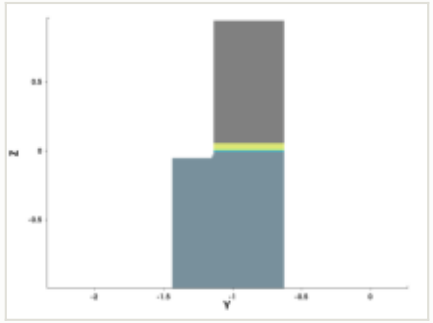

y cut at -1.035 µm

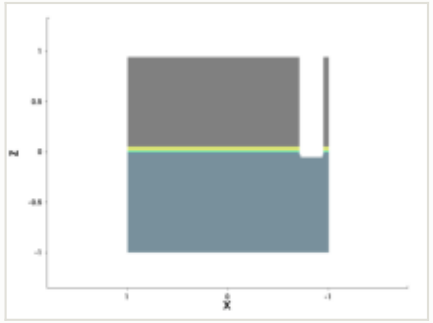

mask for this step

no mask for this step

steps by process area

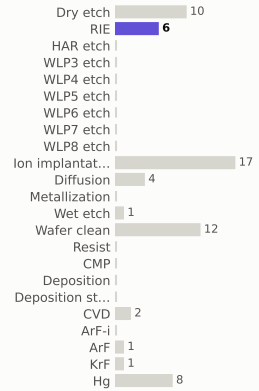

materials deposited (g)



gases emitted (g)

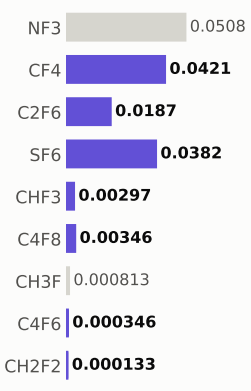

Step #680: RIE

etch_anisotropic · RIE

1.04	64.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

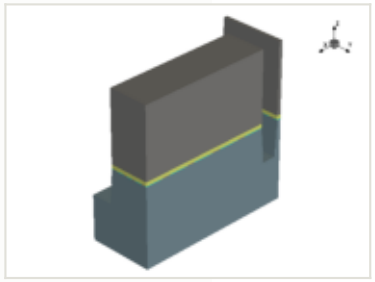

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

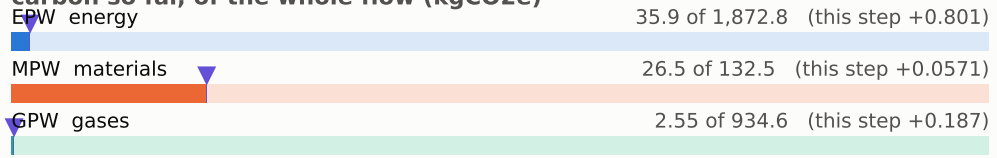

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

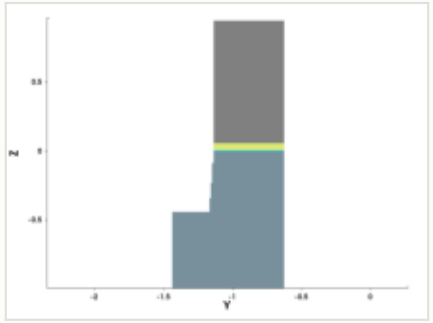

y cut at -1.035 µm

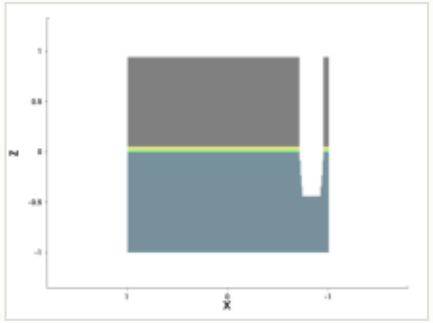

mask for this step

no mask for this step

steps by process area

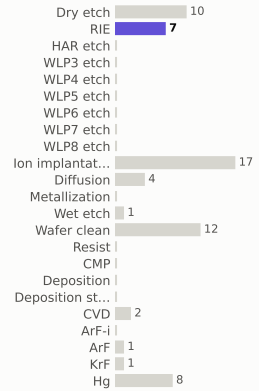

materials deposited (g)



gases emitted (g)

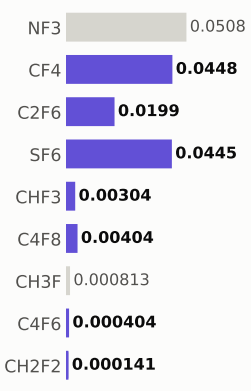

Step #690: Dry_etch

etch_strip · Dry_etch

0.801	65.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

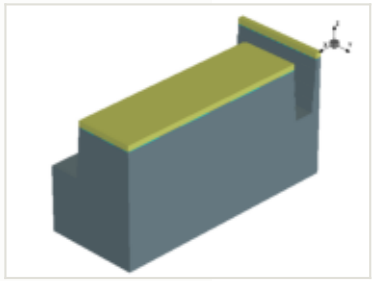

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

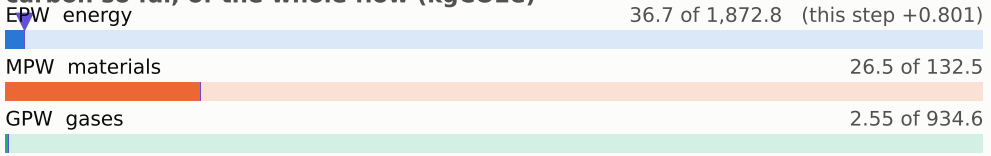

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

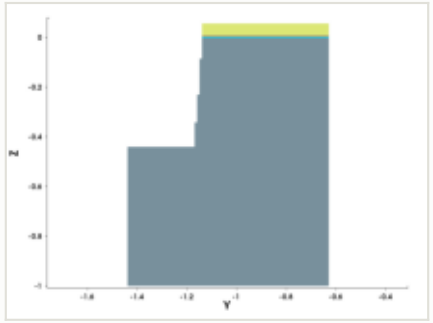

y cut at -1.035 µm

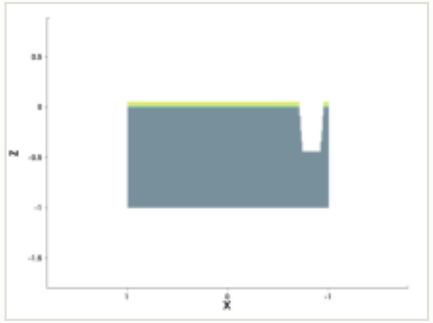

mask for this step

no mask for this step

steps by process area

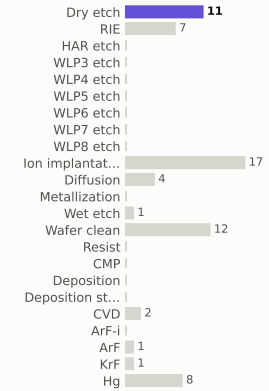

materials deposited (g)



gases emitted (g)

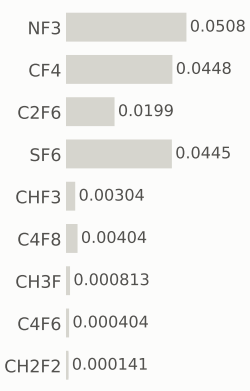

Step #700: Wafer_clean

clean · Wafer_clean

0.169	65.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

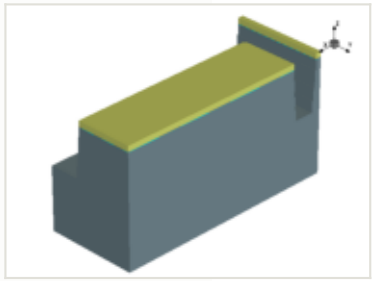

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

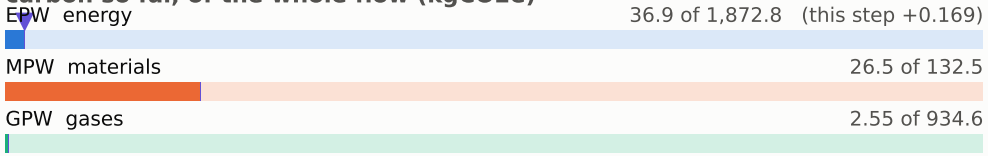

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

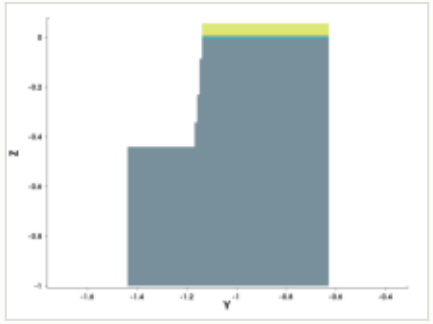

y cut at -1.035 µm

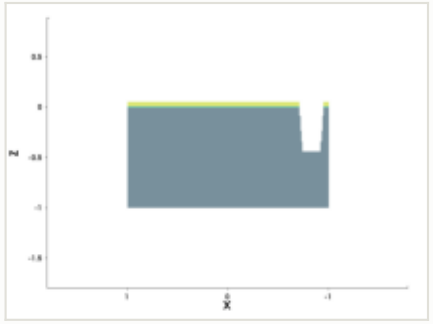

mask for this step

no mask for this step

steps by process area

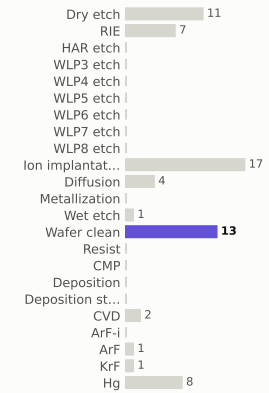

materials deposited (g)



gases emitted (g)



Step #710: Hg

litho_patterning · Hg

0.199	66.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

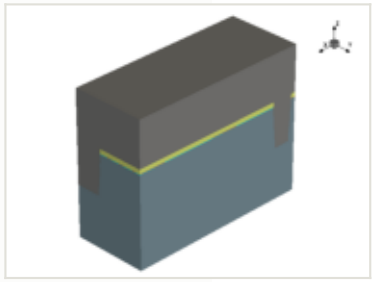

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

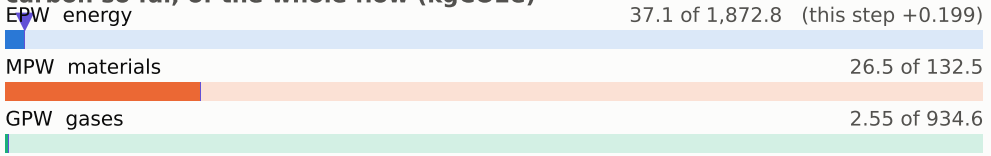

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

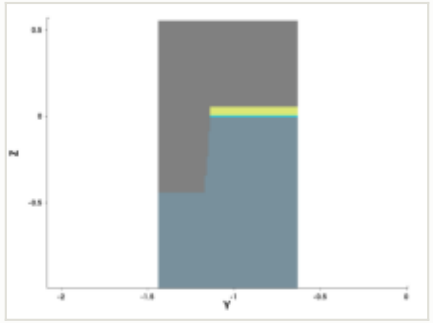

y cut at -1.035 µm

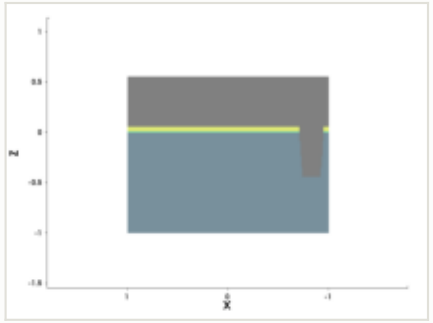

mask: layer 11:0, positive (OASIS)

steps by process area

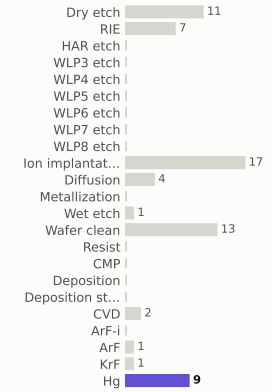

materials deposited (g)



gases emitted (g)

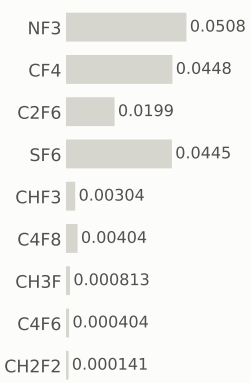

Step #720: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	66.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

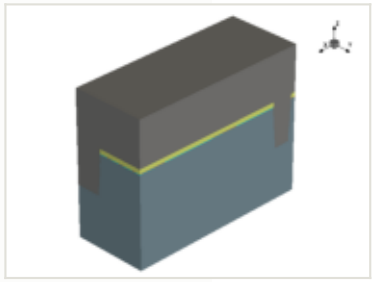

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

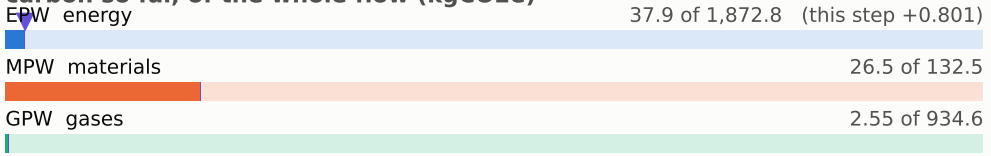

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

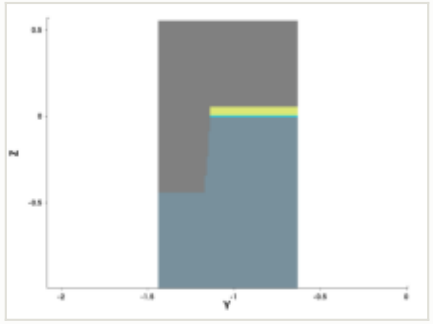

y cut at -1.035 µm

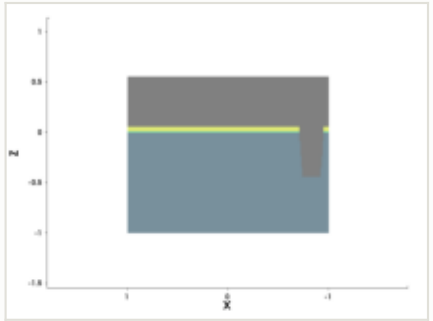

mask for this step

no mask for this step

steps by process area

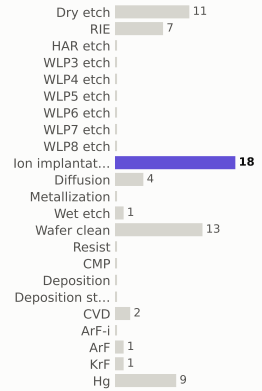

materials deposited (g)



gases emitted (g)

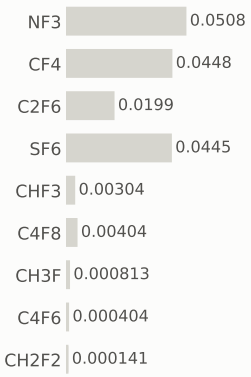

Step #730: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	67.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

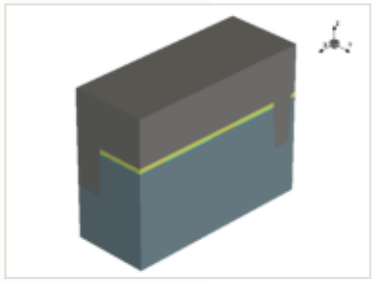

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

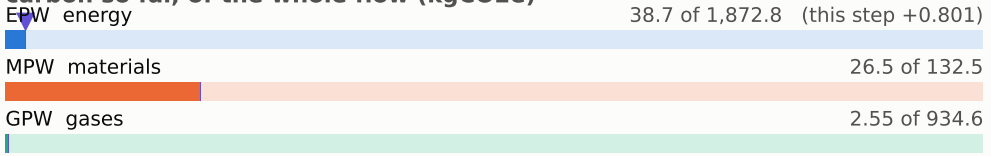

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

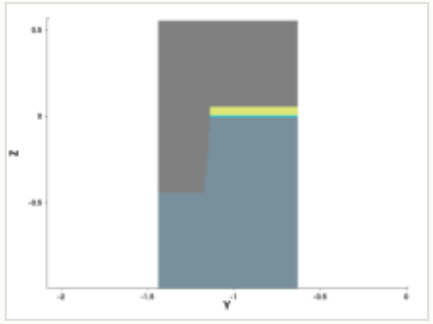

y cut at -1.035 µm

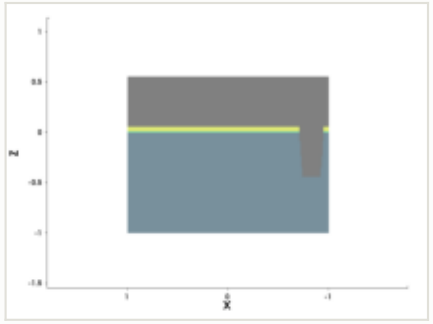

mask for this step

no mask for this step

steps by process area

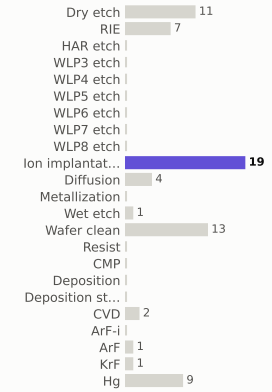

materials deposited (g)



gases emitted (g)

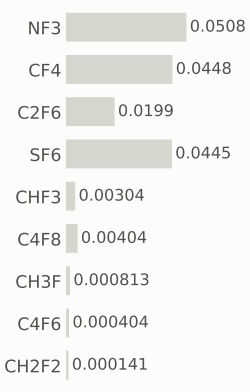

Step #740: Dry_etch

etch_strip · Dry_etch

0.801	68.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

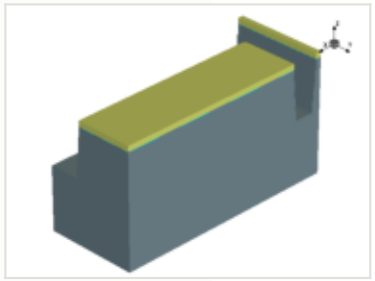

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

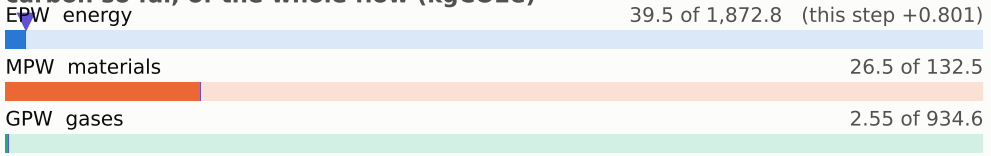

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

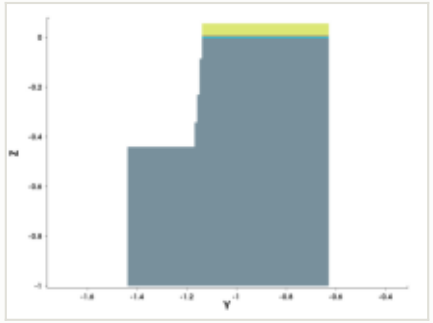

y cut at -1.035 µm

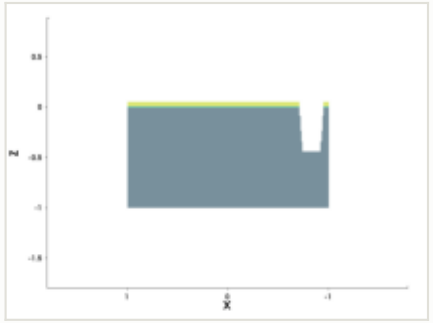

mask for this step

no mask for this step

steps by process area

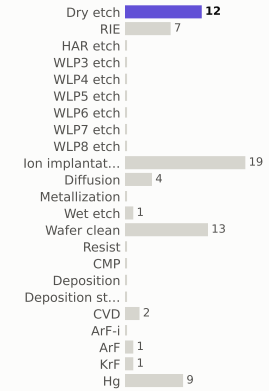

materials deposited (g)



gases emitted (g)

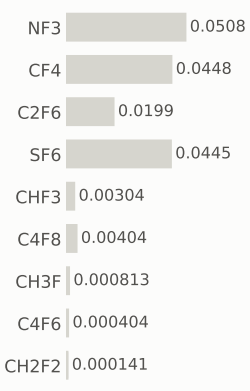

Step #750: Wafer_clean

clean · Wafer_clean

0.169	68.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

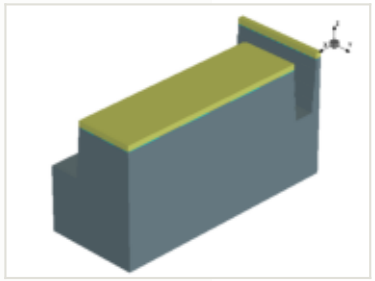

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

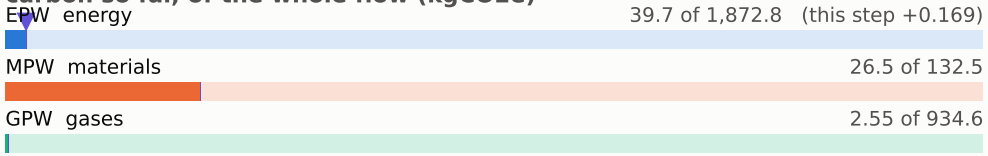

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

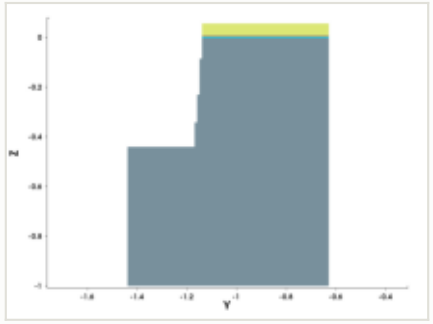

y cut at -1.035 µm

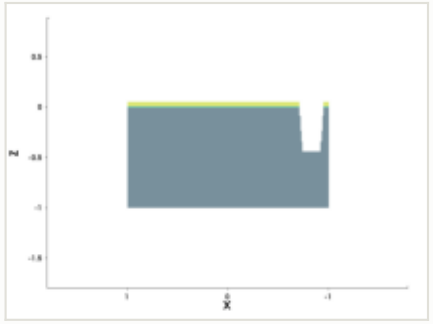

mask for this step

no mask for this step

steps by process area

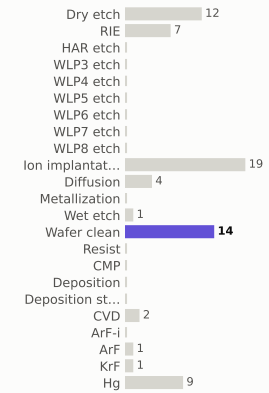

materials deposited (g)



gases emitted (g)

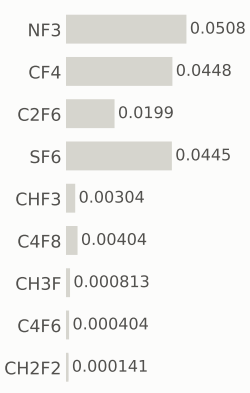

Step #760: Hg

litho_patterning · Hg

0.199	68.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

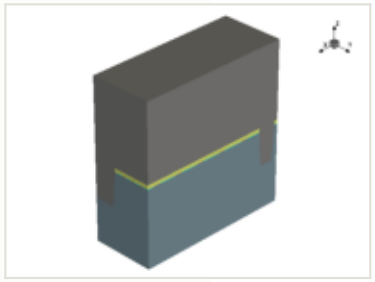

this step

process area	Hg	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

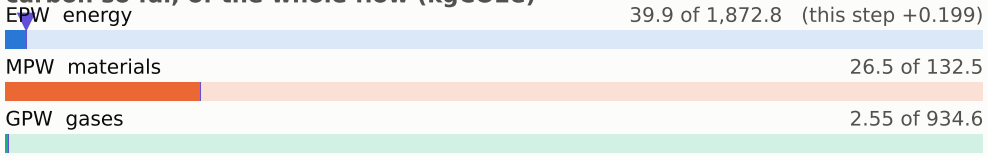

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

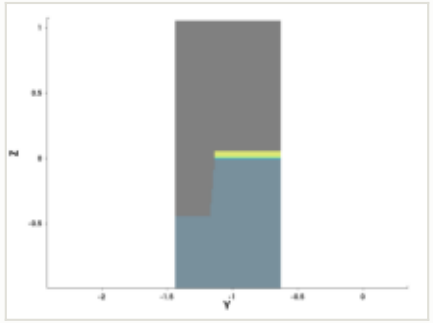

y cut at -1.035 µm

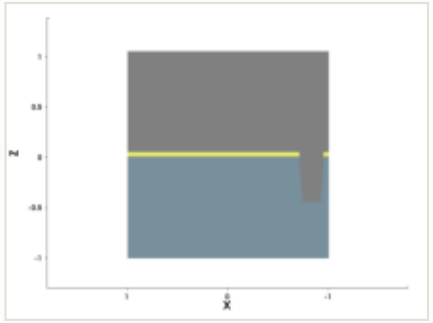

mask: layer 12:0, positive (OASIS)

steps by process area

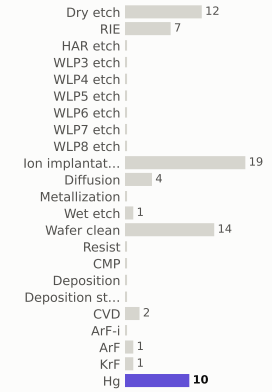

materials deposited (g)



gases emitted (g)

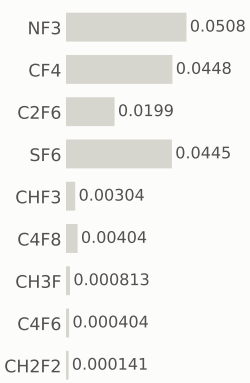

Step #770: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	69.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

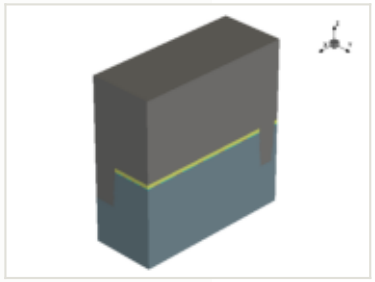

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

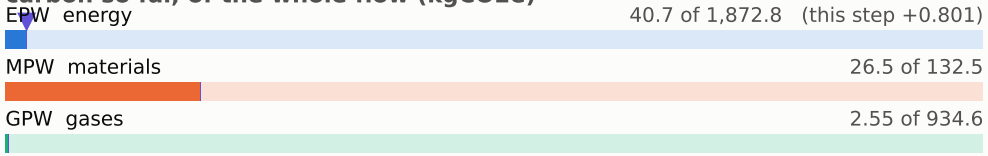

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

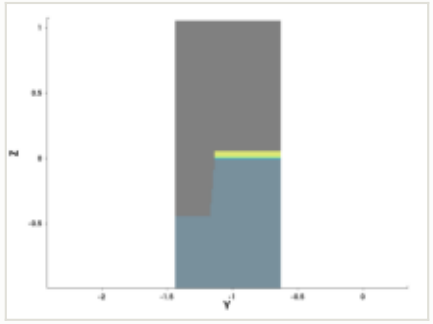

y cut at -1.035 µm

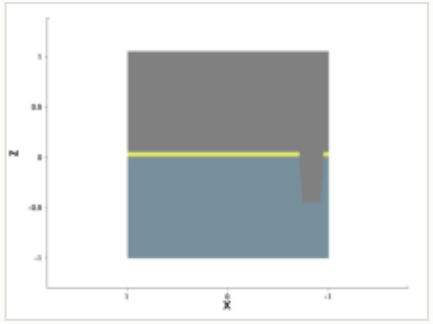

mask for this step

no mask for this step

steps by process area

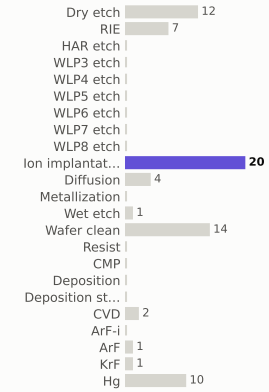

materials deposited (g)



gases emitted (g)



Step #780: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	70.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

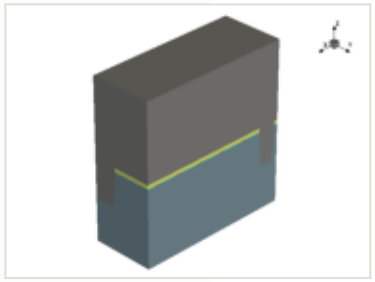

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

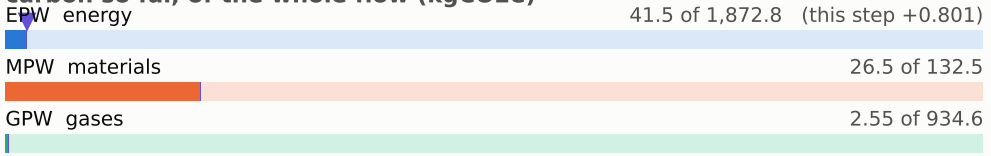

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

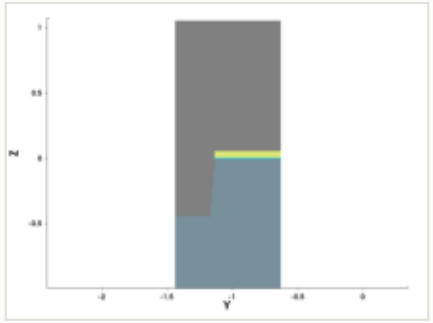

y cut at -1.035 µm

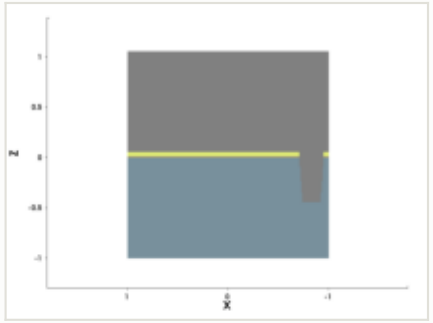

mask for this step

no mask for this step

steps by process area

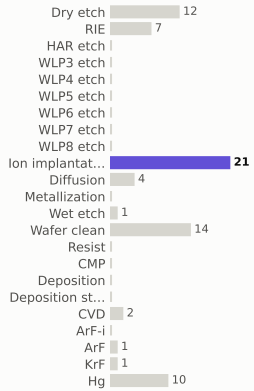

materials deposited (g)



gases emitted (g)

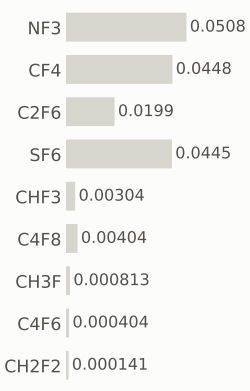

Step #790: Dry_etch

etch_strip · Dry_etch

0.801	71.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

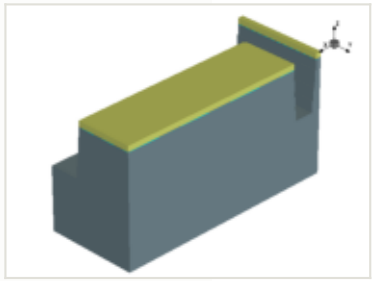

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

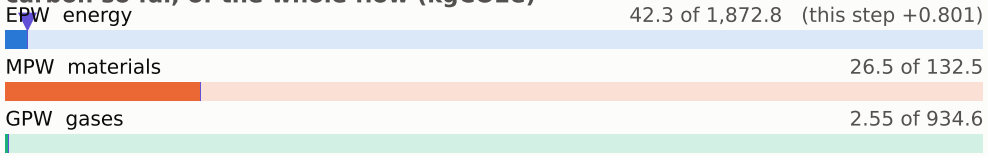

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

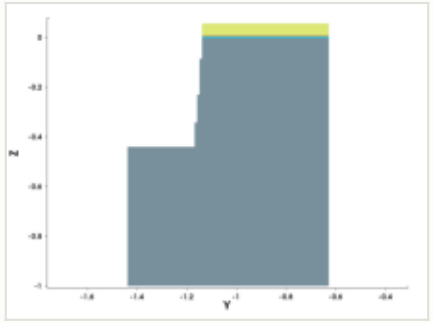

y cut at -1.035 µm

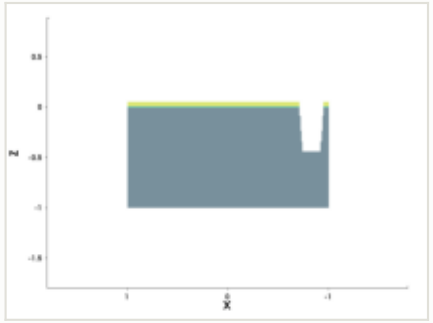

mask for this step

no mask for this step

steps by process area

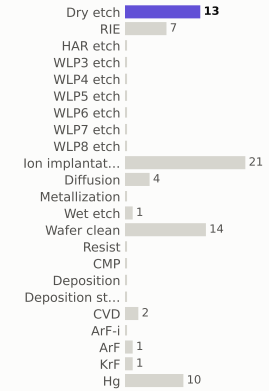

materials deposited (g)



gases emitted (g)

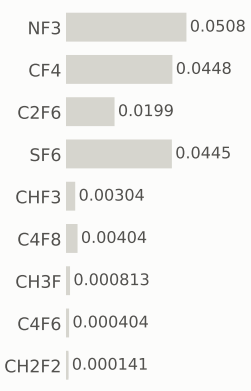

Step #800: Wafer_clean

clean · Wafer_clean

0.169	71.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

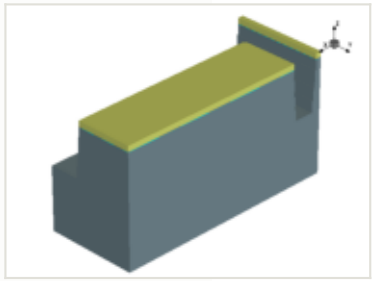

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

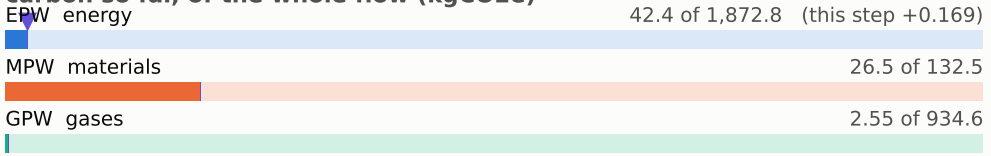

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

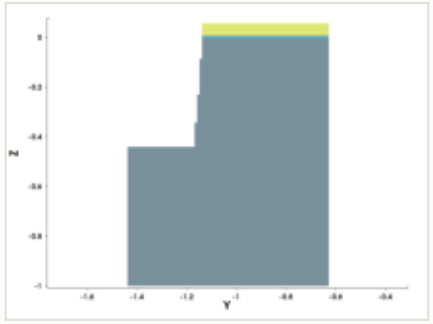

y cut at -1.035 µm

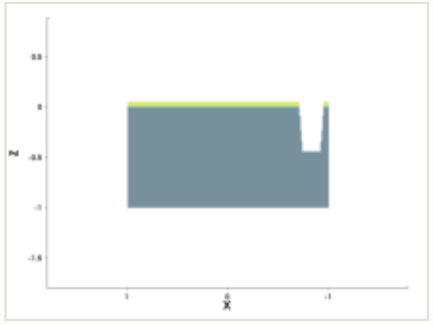

mask for this step

no mask for this step

steps by process area

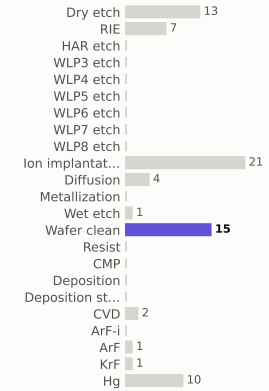

materials deposited (g)



gases emitted (g)

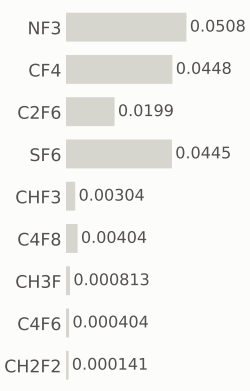

Step #810: Diffusion

depo_isotropic · Diffusion

0.801	72.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

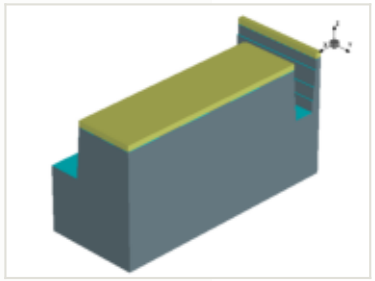

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	0.002 µm	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

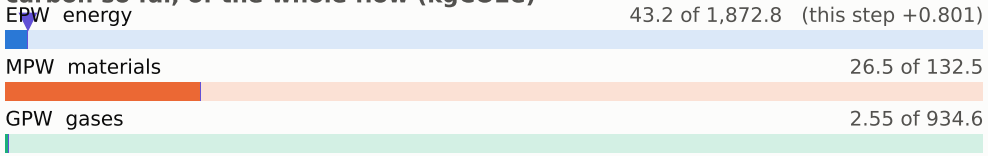

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

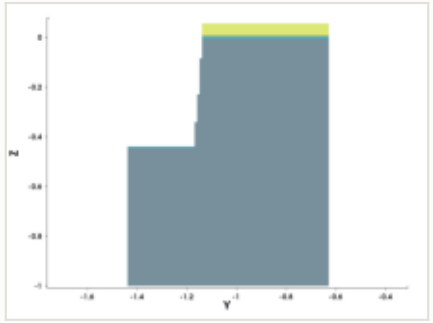

y cut at -1.035 µm

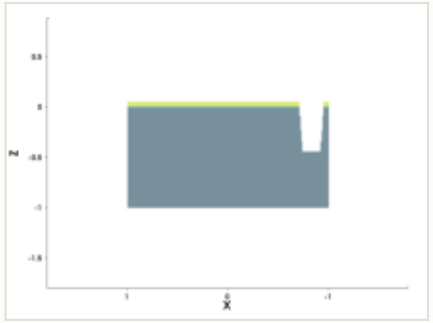

mask for this step

no mask for this step

steps by process area

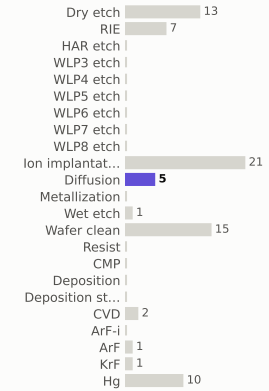

materials deposited (g)



gases emitted (g)

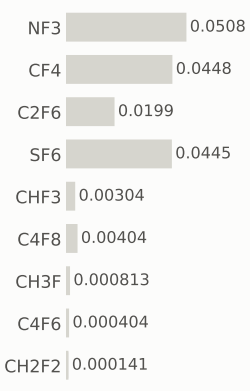

Step #820: Deposition

depo_isotropic · Deposition

0.656	72.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

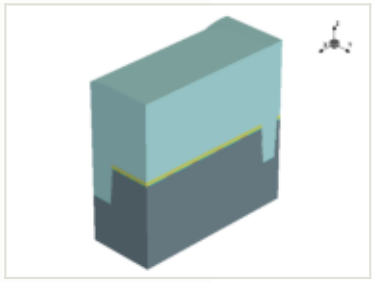

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.9 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

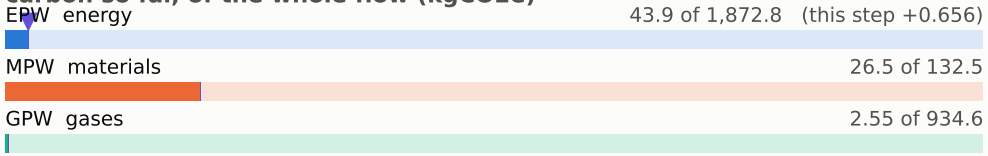

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

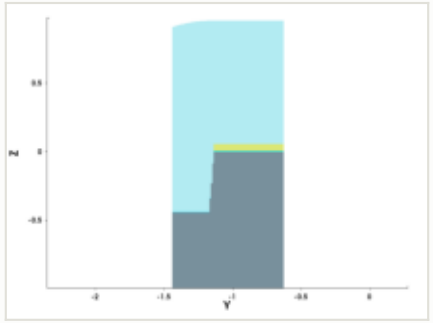

y cut at -1.035 µm

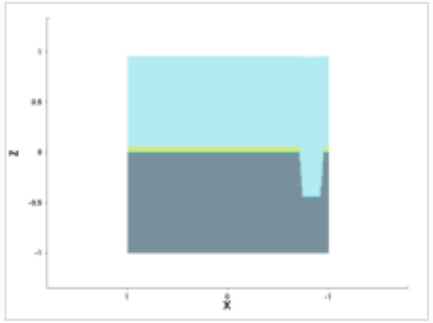

mask for this step

no mask for this step

steps by process area

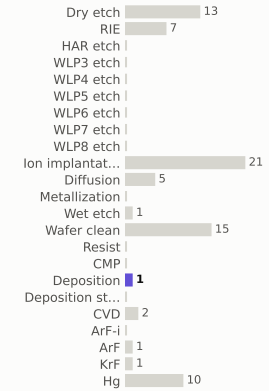

materials deposited (g)



gases emitted (g)

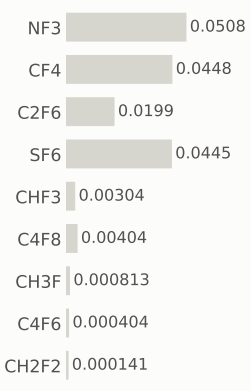

Step #830: Diffusion

anneal · Diffusion

0.801	73.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

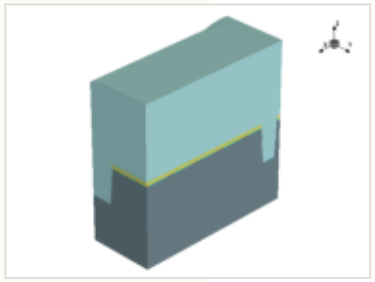

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

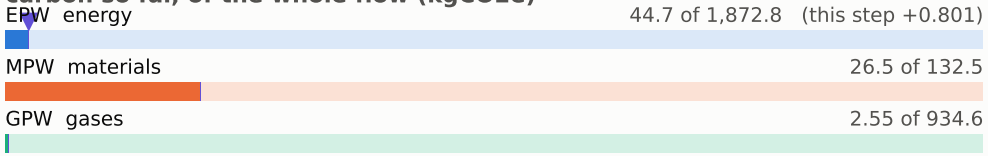

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

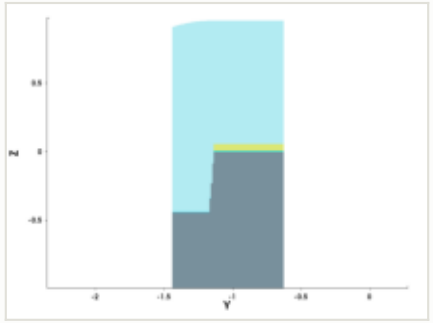

y cut at -1.035 µm

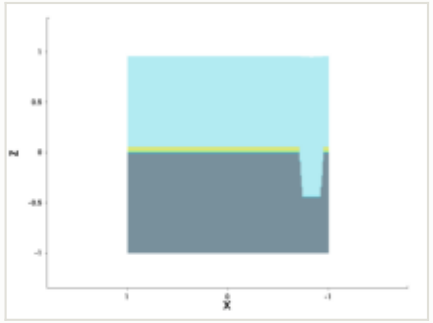

mask for this step

no mask for this step

steps by process area

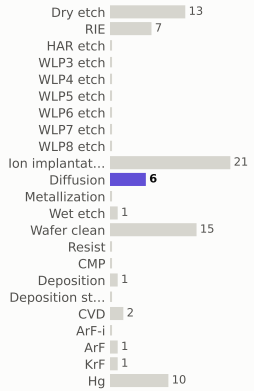

materials deposited (g)



gases emitted (g)

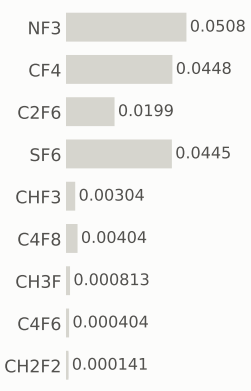

Step #840: CMP

etch_cmp · CMP

0.169	73.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

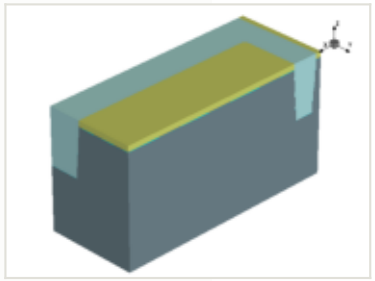

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

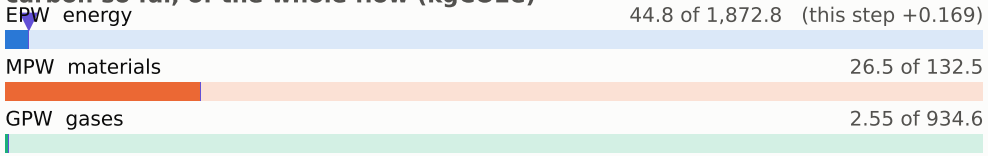

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

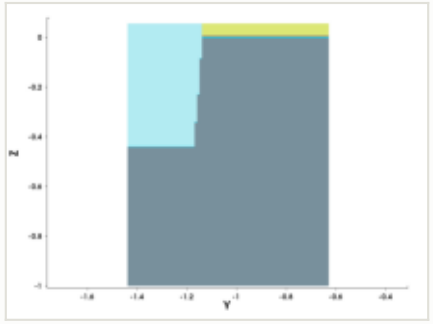

y cut at -1.035 µm

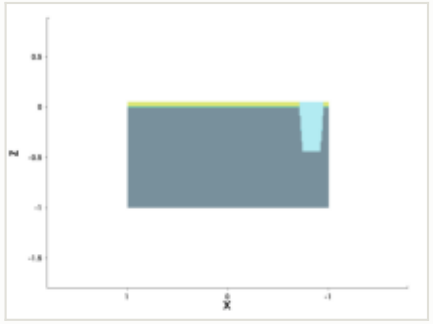

mask for this step

no mask for this step

steps by process area

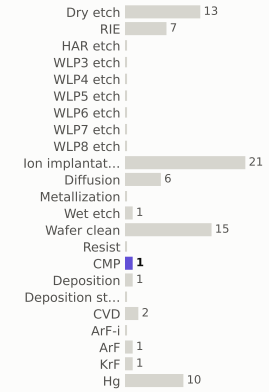

materials deposited (g)



gases emitted (g)

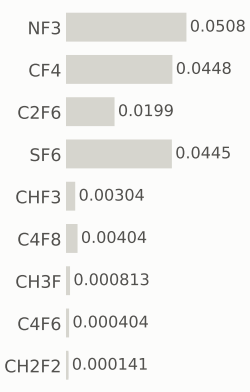

Step #850: Wet_etch

etch_anisotropic · Wet_etch

0.169	74	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

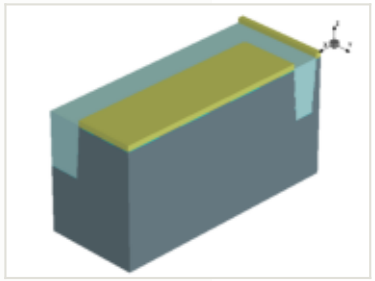

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

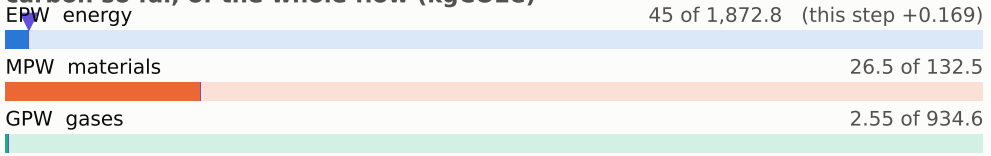

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

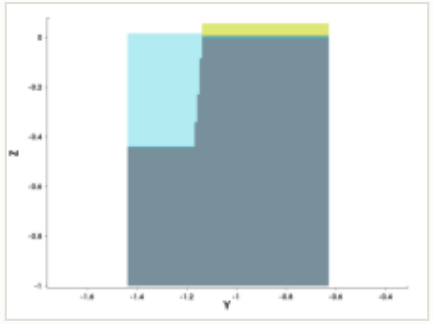

y cut at -1.035 µm

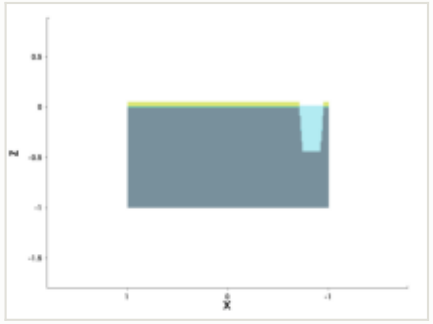

mask for this step

no mask for this step

steps by process area

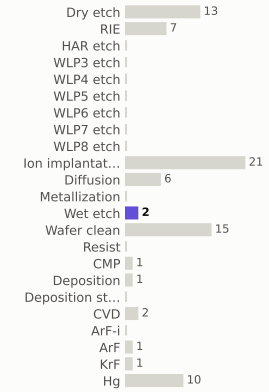

materials deposited (g)



gases emitted (g)

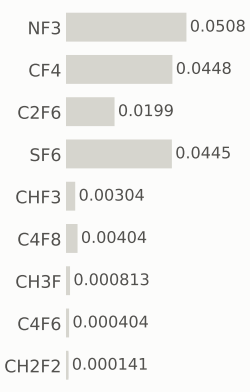

Step #860: Wet_etch

etch_isotropic · Wet_etch

0.169	74.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

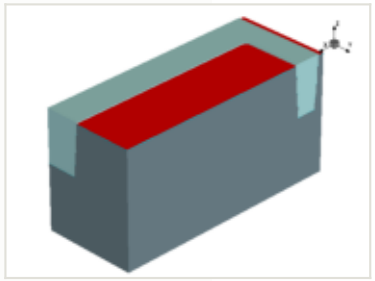

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

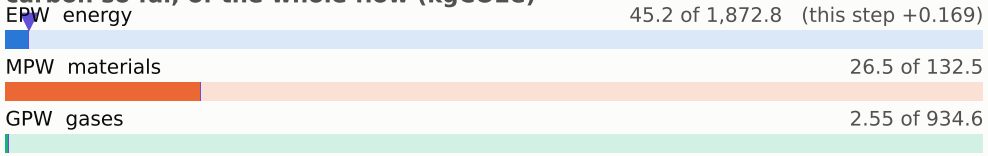

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

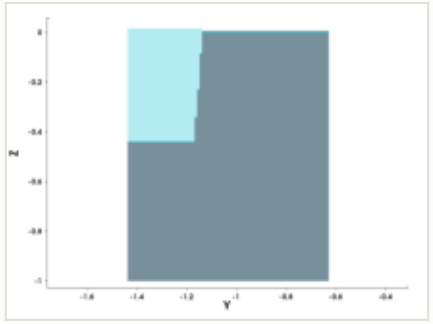

y cut at -1.035 µm

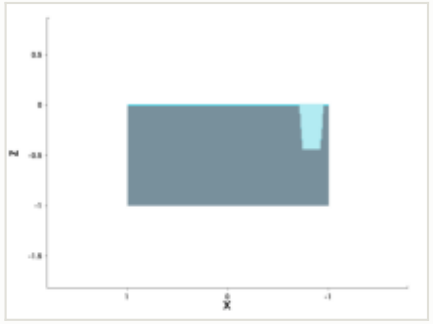

mask for this step

no mask for this step

steps by process area

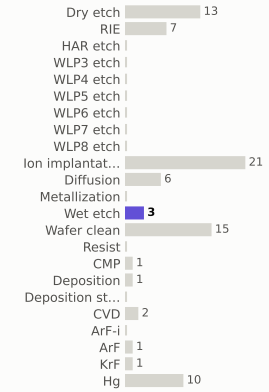

materials deposited (g)



gases emitted (g)

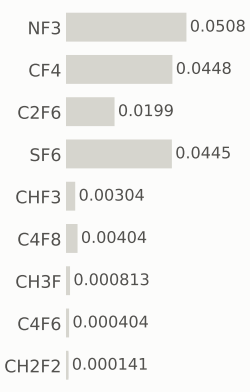

Step #870: Wafer_clean

clean · Wafer_clean

0.169	74.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

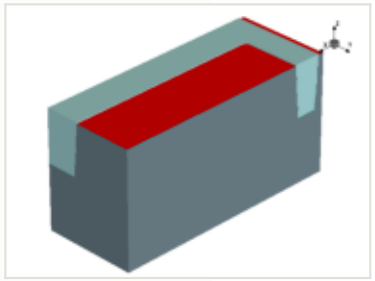

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

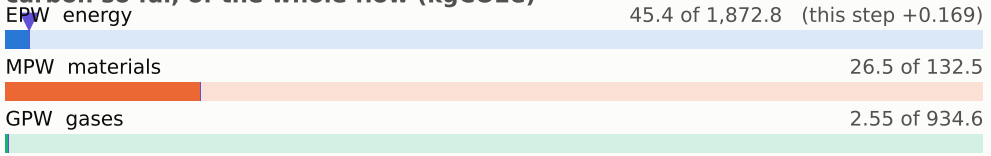

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

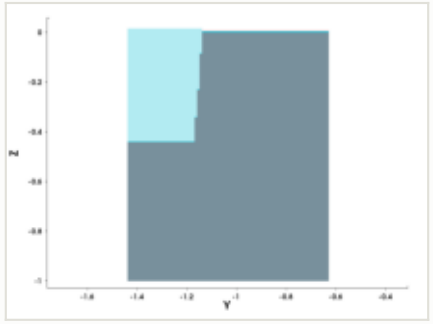

y cut at -1.035 µm

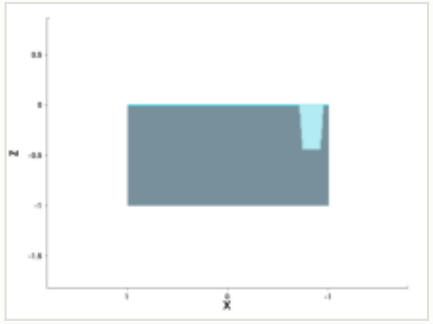

mask for this step

no mask for this step

steps by process area

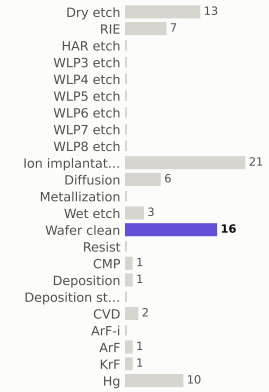

materials deposited (g)



gases emitted (g)

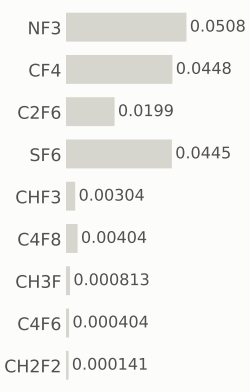

Step #890: CVD

depo_isotropic · CVD

1.31	75.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

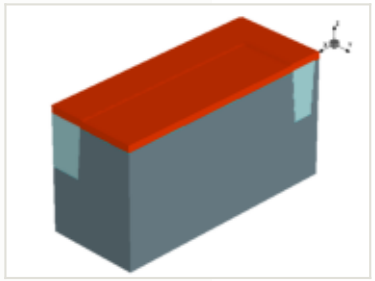

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.063 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

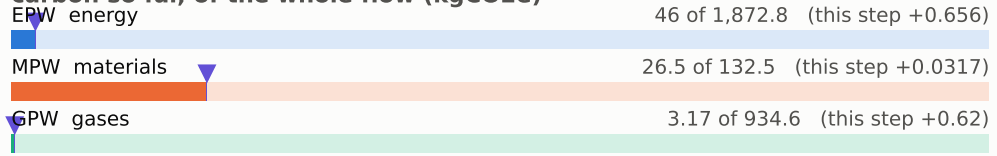

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

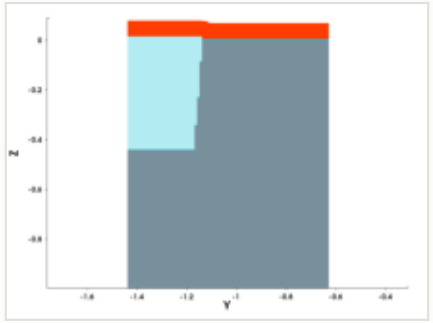

y cut at -1.035 µm

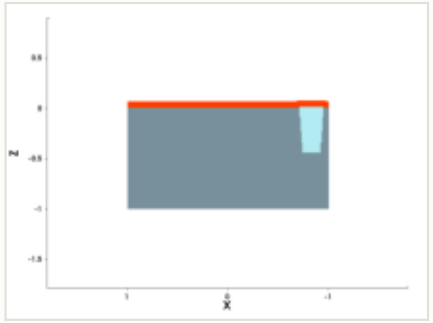

mask for this step

no mask for this step

steps by process area

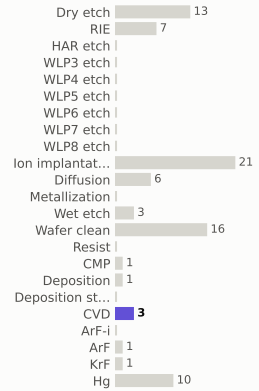

materials deposited (g)



gases emitted (g)

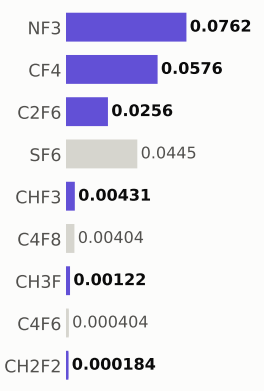

Step #900: Metallization

depo_isotropic · Metallization

1.2	76.9	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

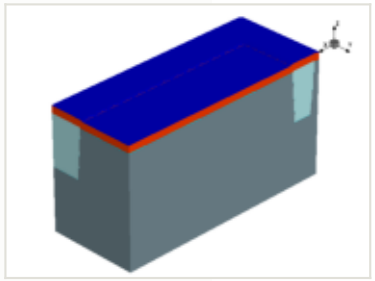

this step

process area	Metallization
material	Ti
thickness	0.003 µm
material GWP	47.6334 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.55e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

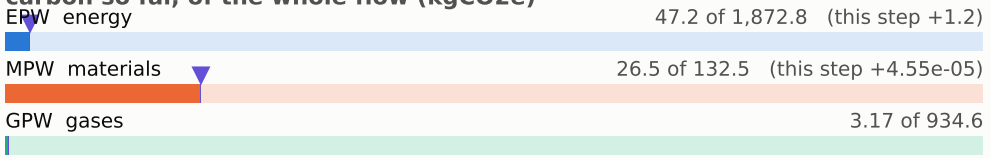

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

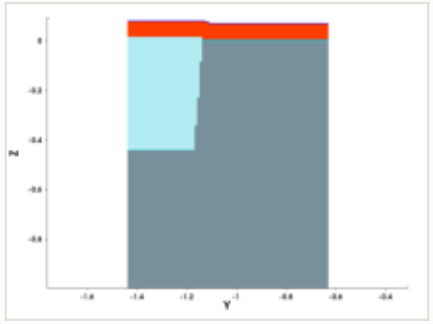

y cut at -1.035 µm

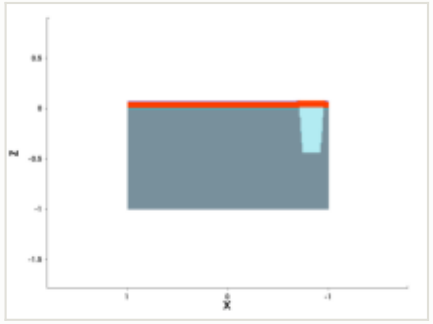

mask for this step

no mask for this step

steps by process area

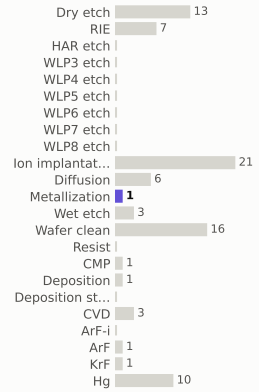

materials deposited (g)

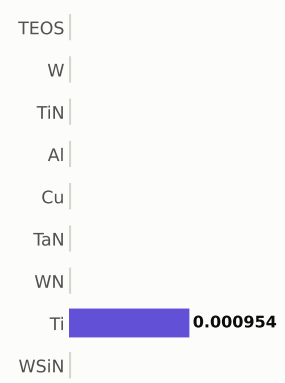

gases emitted (g)

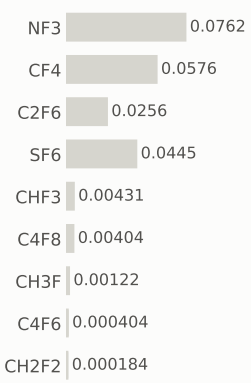

Step #910: Deposition

depo_isotropic · Deposition

0.657	77.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

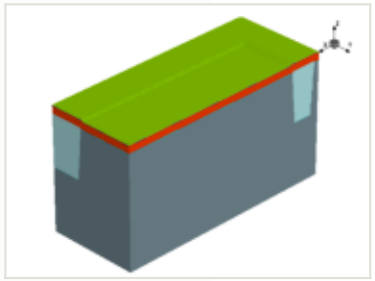

this step

process area	Deposition
material	WN
thickness	0.006 µm
material GWP	76.8289 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.00058 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

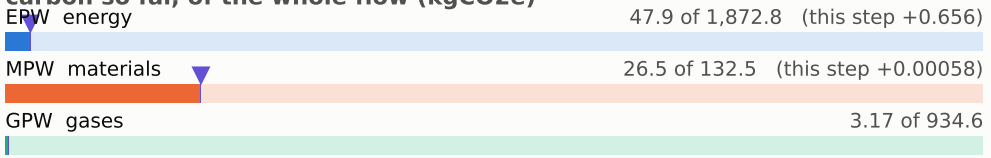

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

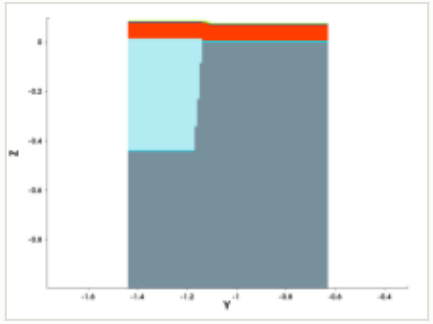

y cut at -1.035 µm

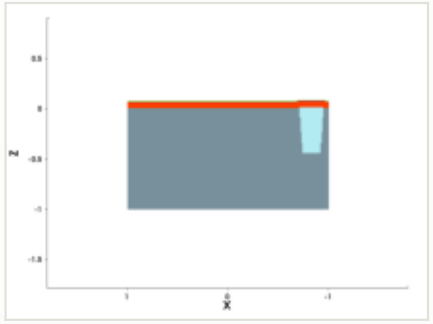

mask for this step

no mask for this step

steps by process area

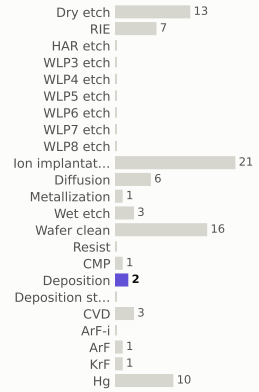

materials deposited (g)

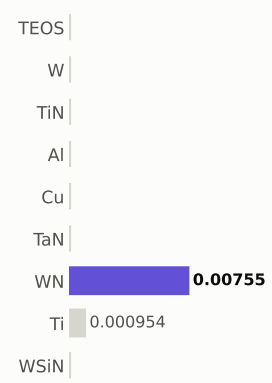

gases emitted (g)

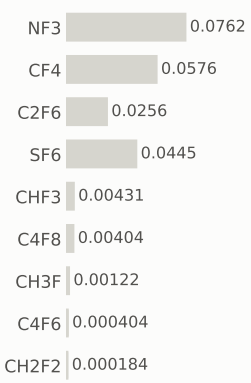

Step #920: Deposition

depo_isotropic · Deposition

0.656	78.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

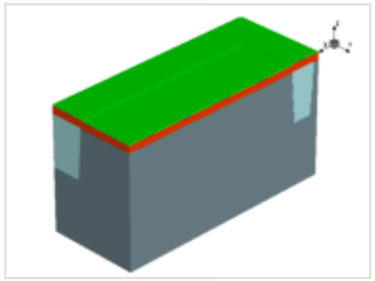

this step

process area	Deposition	EPW	0.656 kgCO2e
material	WSiN	EPW tool	0.469 kgCO2e
thickness	0.003 µm	EPW overhead	0.187 kgCO2e
material GWP	73.2252 gCO2e/g	MPW	0.00025 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

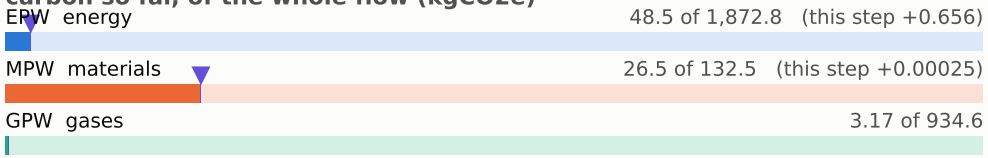

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

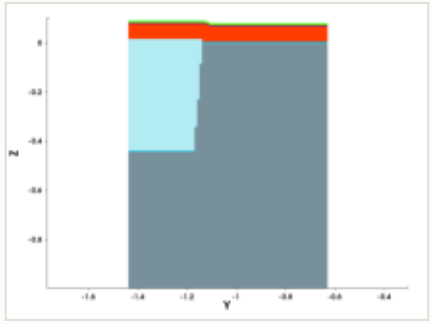

y cut at -1.035 µm

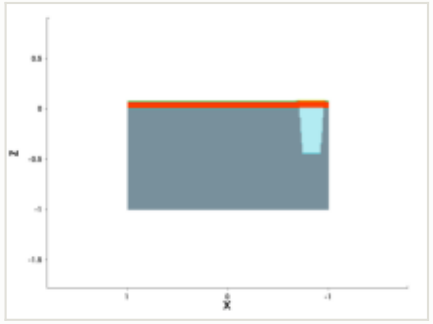

mask for this step

no mask for this step

steps by process area

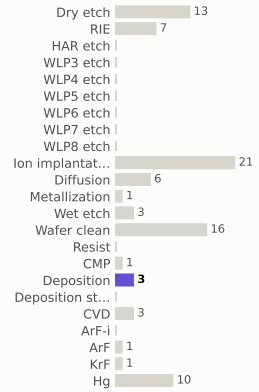

materials deposited (g)

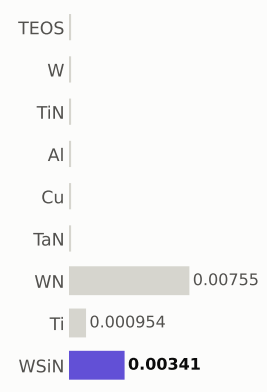

gases emitted (g)



Step #930: Metallization

depo_isotropic · Metallization

1.21	79.4	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

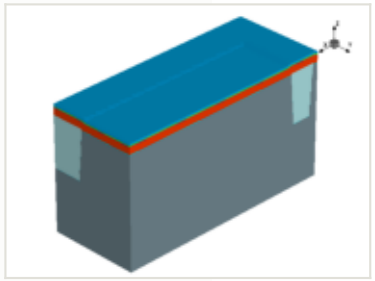

this step

process area	Metallization
material	W
thickness	0.017 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00176 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

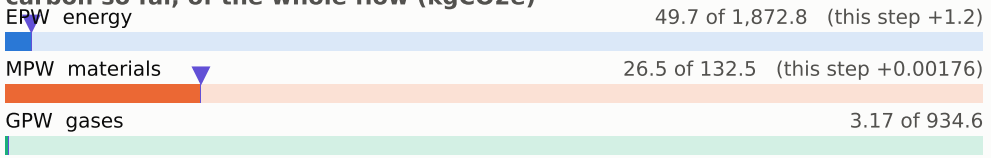

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

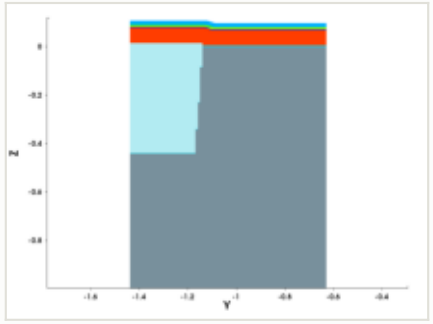

y cut at -1.035 µm

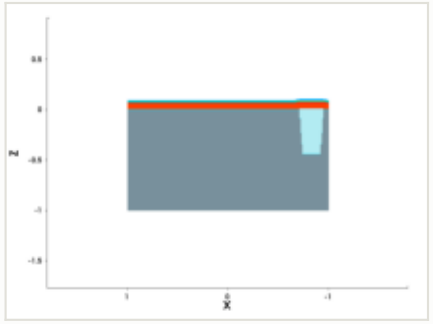

mask for this step

no mask for this step

steps by process area

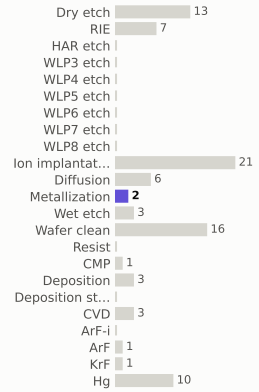

materials deposited (g)

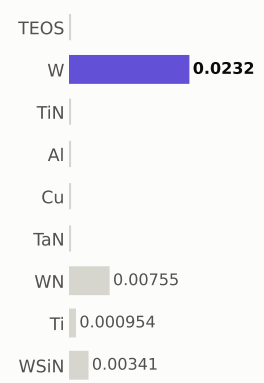

gases emitted (g)

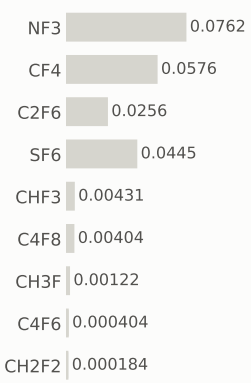

Step #940: CVD

depo_isotropic · CVD

1.31	80.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

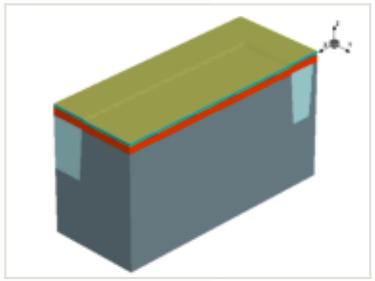

this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

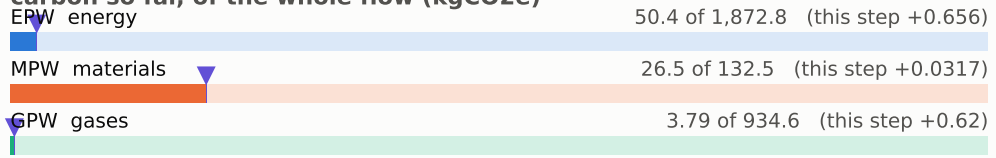

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

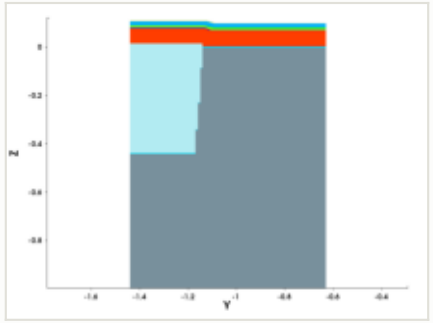

y cut at -1.035 µm

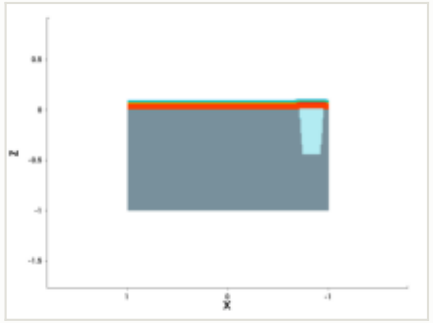

mask for this step

no mask for this step

steps by process area

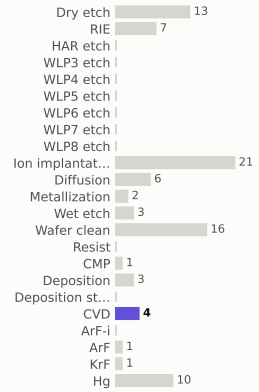

materials deposited (g)

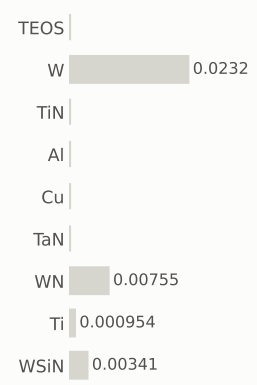

gases emitted (g)



Step #950: CVD

depo_isotropic · CVD

1.31	82	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

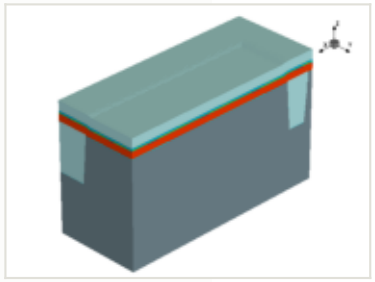

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.085 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

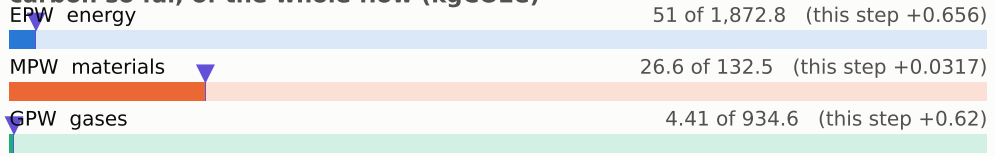

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

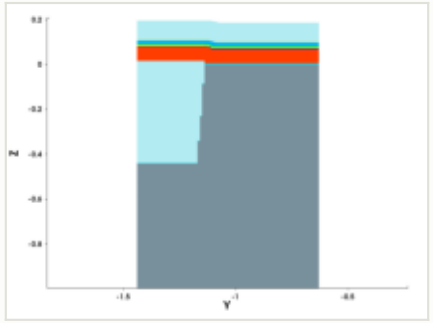

y cut at -1.035 µm

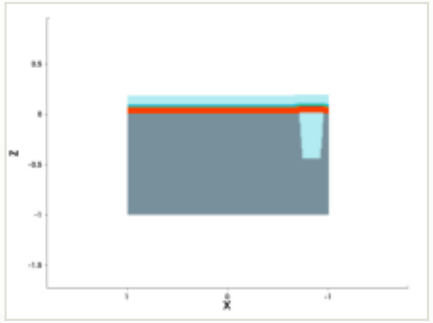

mask for this step

no mask for this step

steps by process area

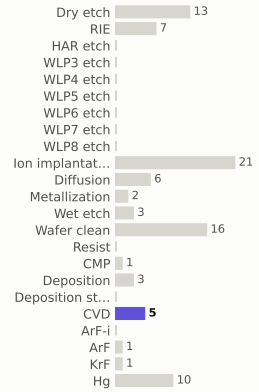

materials deposited (g)

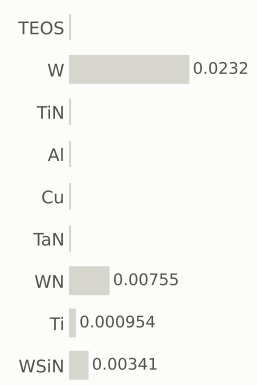

gases emitted (g)



Step #960: KrF

litho_patterning · KrF

0.199	82.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

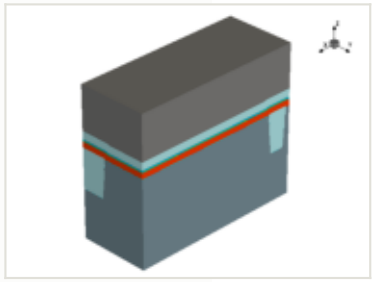

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

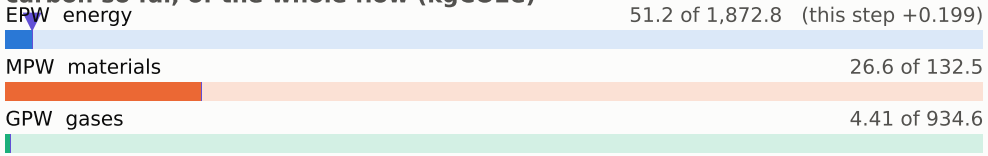

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

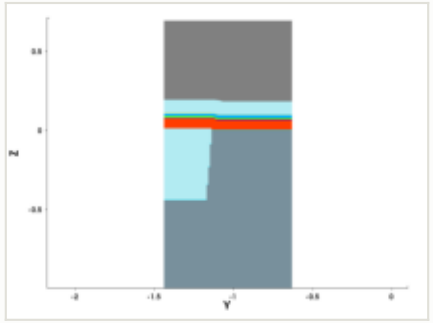

y cut at -1.035 µm

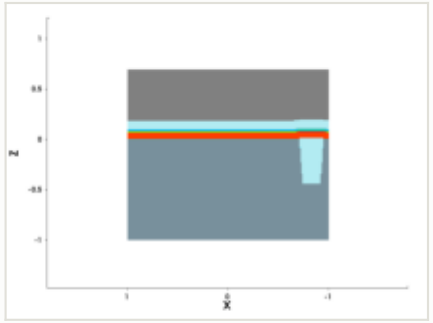

mask: layer 13:0, positive (OASIS)

steps by process area

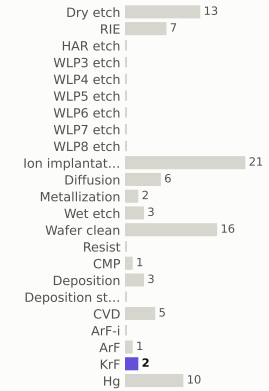

materials deposited (g)

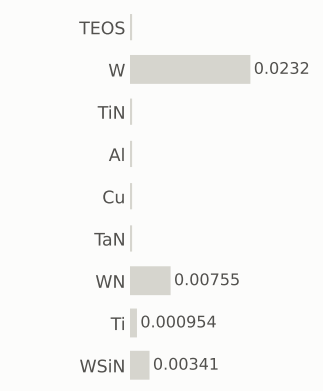

gases emitted (g)

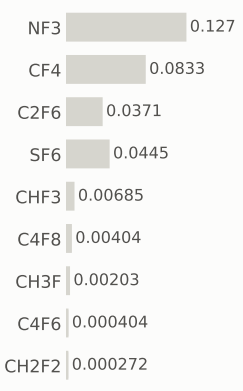

Step #970: RIE

etch_anisotropic · RIE

1.04	83.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

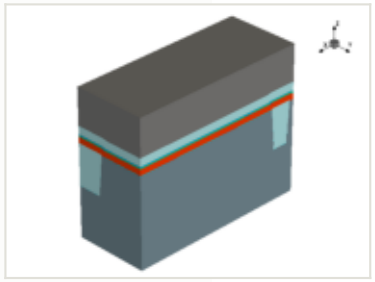

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

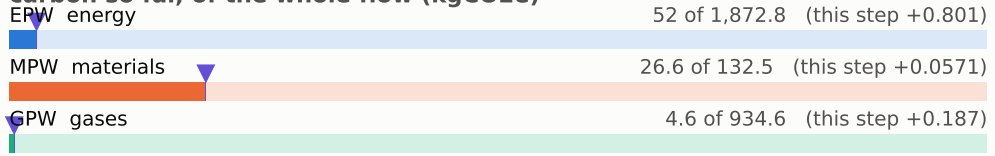

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

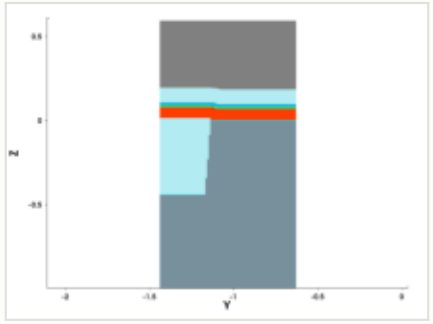

y cut at -1.035 µm

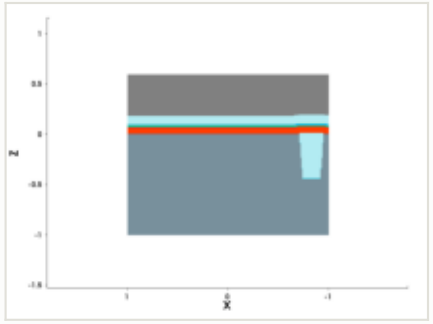

mask for this step

no mask for this step

steps by process area

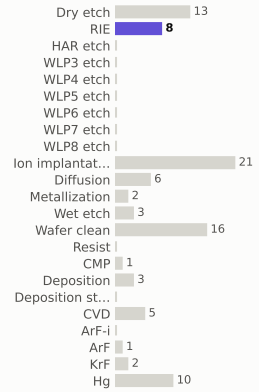

materials deposited (g)



gases emitted (g)



Step #980: RIE

etch_anisotropic · RIE

1.04	84.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

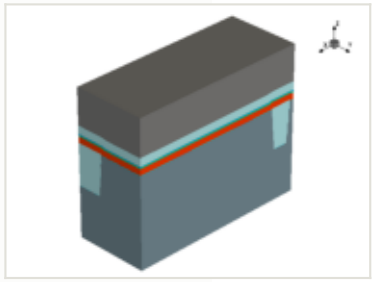

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

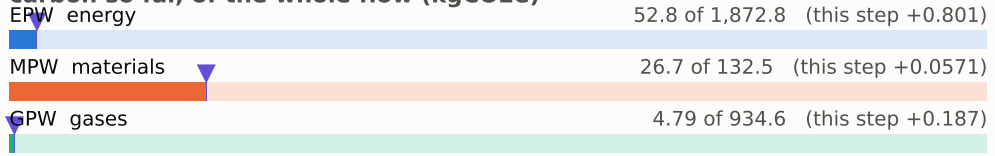

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

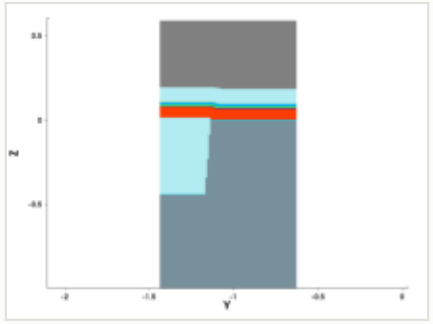

y cut at -1.035 µm

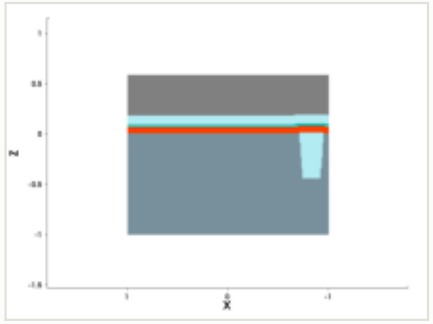

mask for this step

no mask for this step

steps by process area



materials deposited (g)

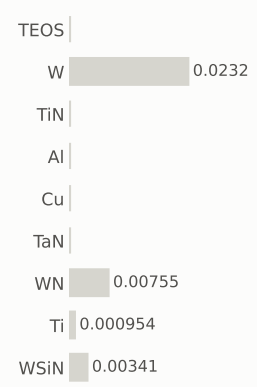

gases emitted (g)



Step #990: RIE

etch_anisotropic · RIE

1.04	85.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

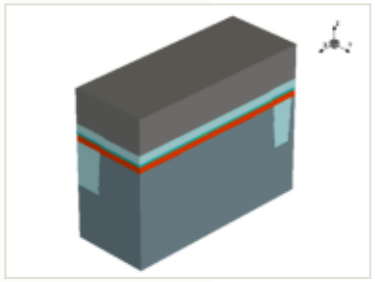

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

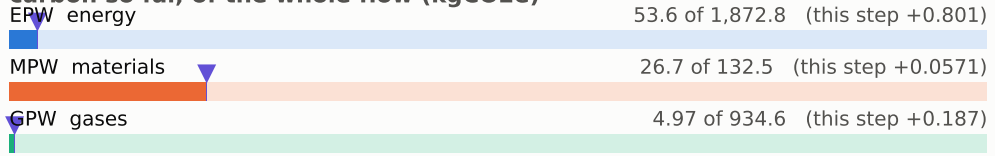

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

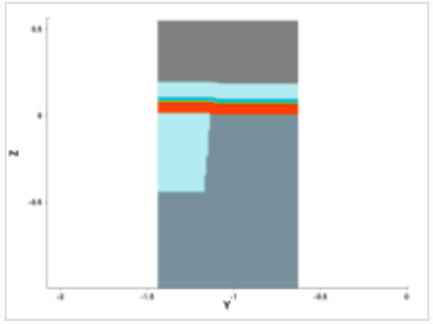

y cut at -1.035 µm

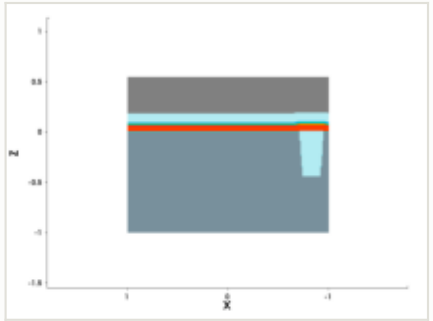

mask for this step

no mask for this step

steps by process area

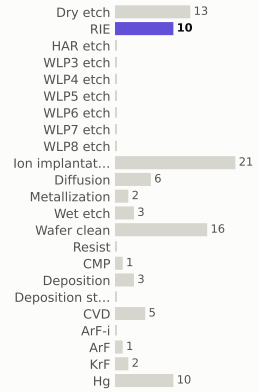

materials deposited (g)

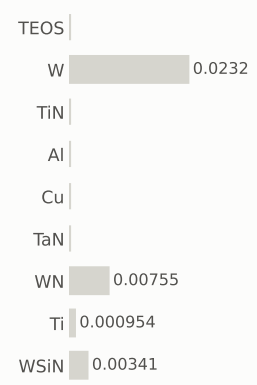

gases emitted (g)



Step #1000: Dry_etch

etch_strip · Dry_etch

0.801	86.1	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

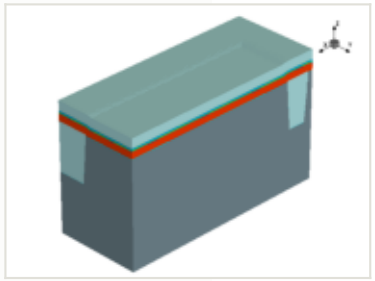

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

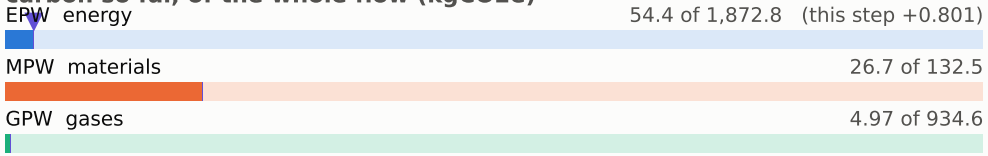

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

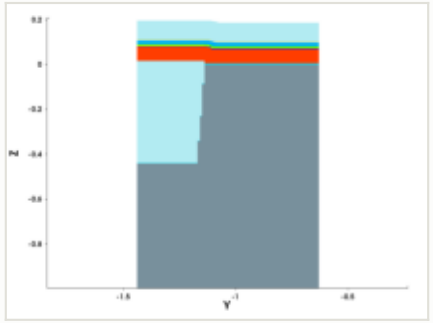

y cut at -1.035 µm

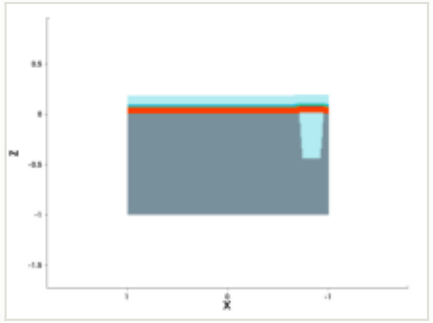

mask for this step

no mask for this step

steps by process area

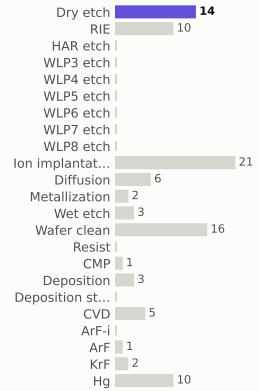

materials deposited (g)

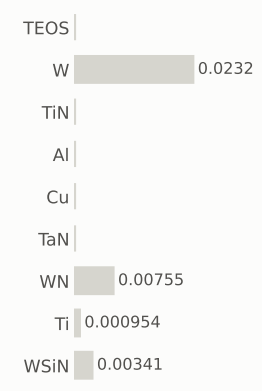

gases emitted (g)

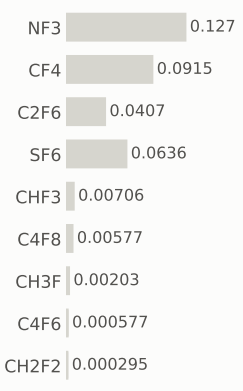

Step #1010: Wafer_clean

clean · Wafer_clean

0.169	86.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

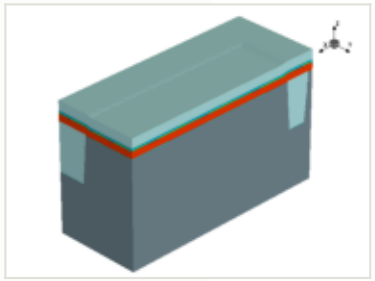

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

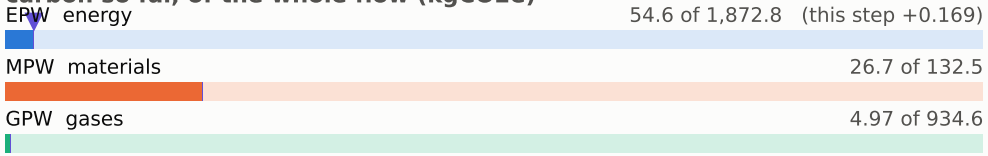

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

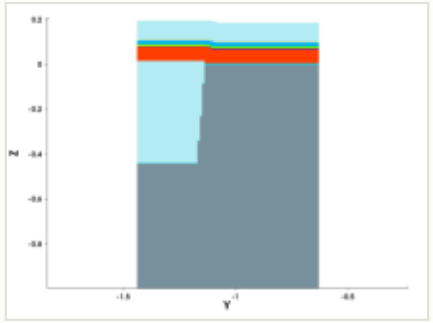

y cut at -1.035 µm

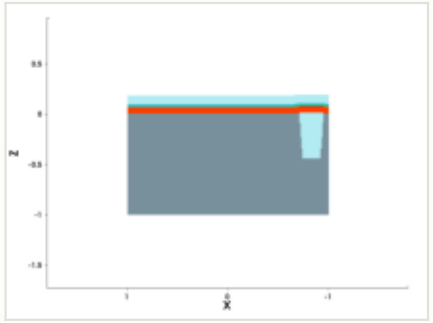

mask for this step

no mask for this step

steps by process area

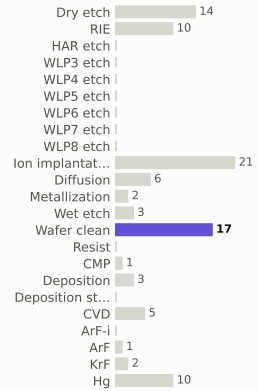

materials deposited (g)

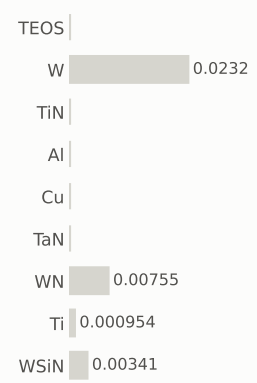

gases emitted (g)



Step #1020: ArF

litho_patterning · ArF

0.199	86.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

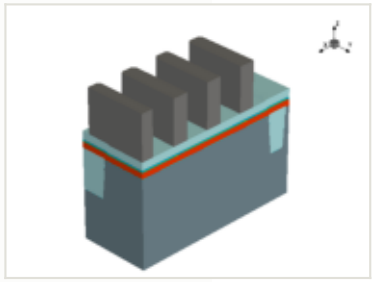

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

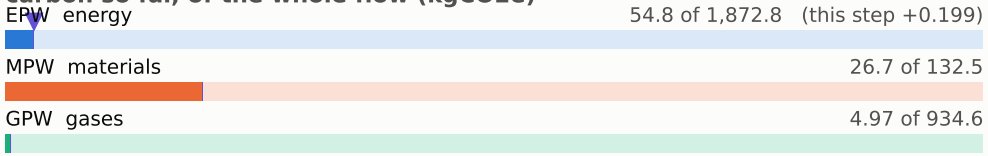

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

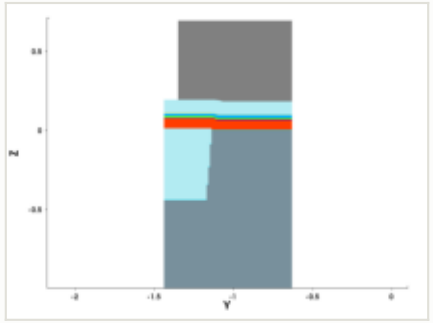

y cut at -1.035 µm

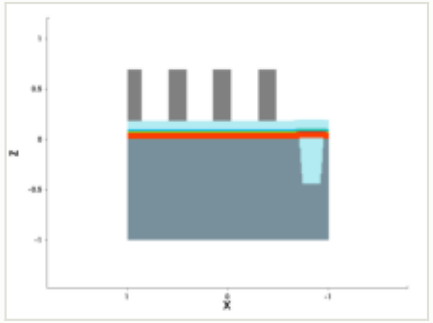

mask: layer 14:0, positive (OASIS)

steps by process area

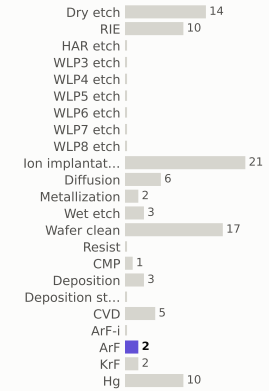

materials deposited (g)

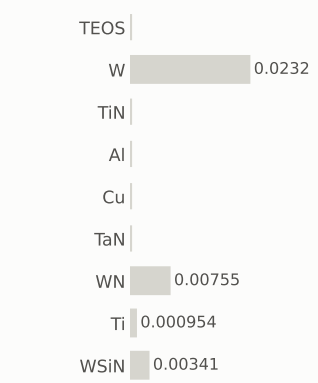

gases emitted (g)

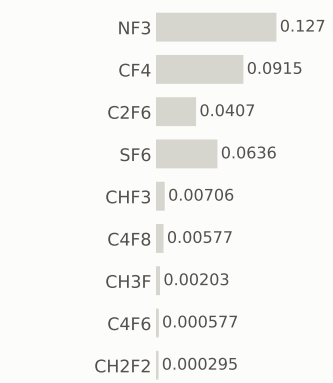

Step #1030: RIE

etch_anisotropic · RIE

1.04	87.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

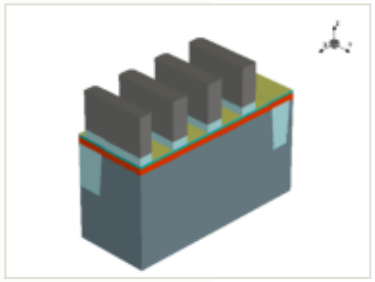

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

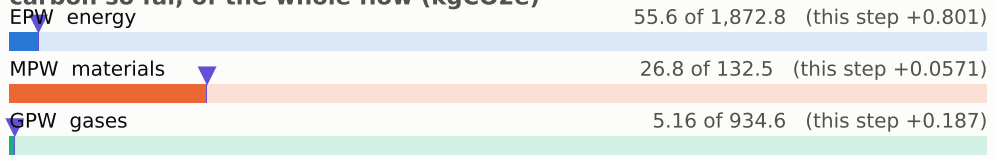

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

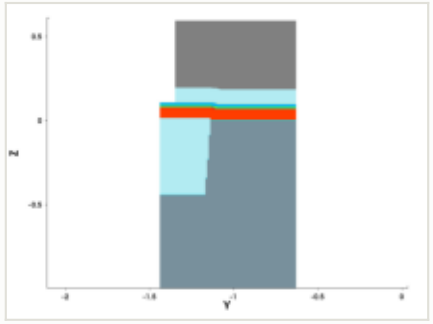

y cut at -1.035 µm

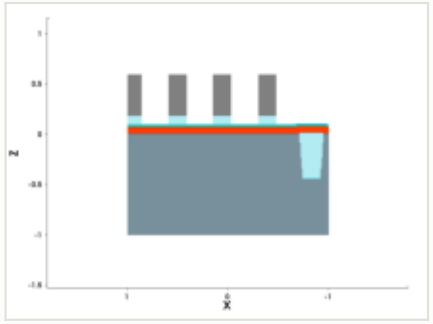

mask for this step

no mask for this step

steps by process area

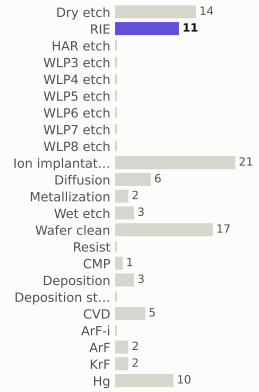

materials deposited (g)

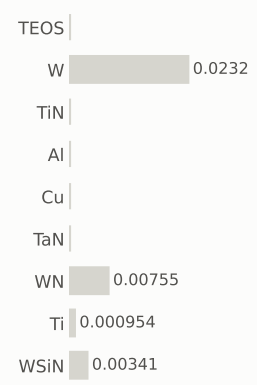

gases emitted (g)



Step #1040: RIE

etch_anisotropic · RIE

1.04	88.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

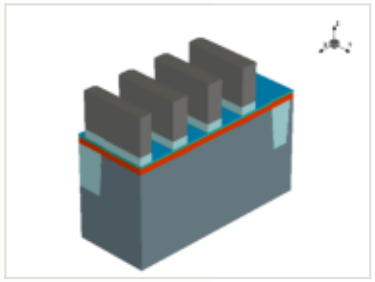

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

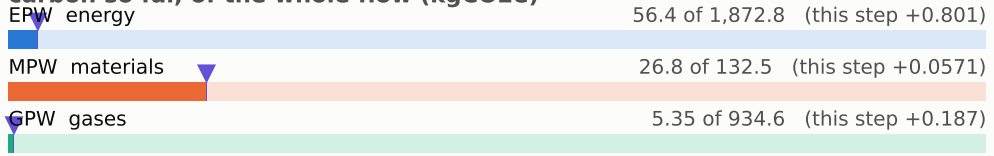

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

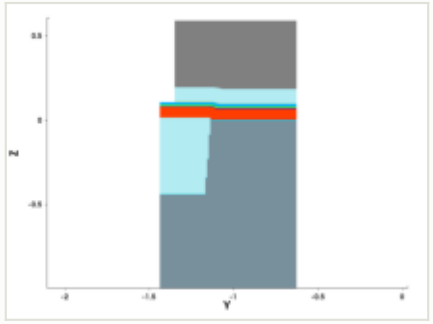

y cut at -1.035 µm

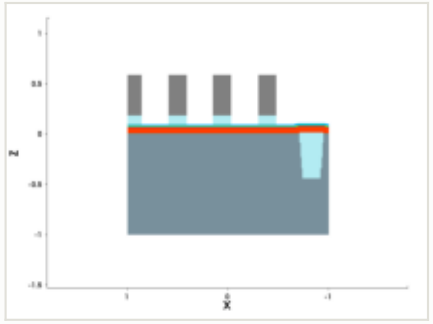

mask for this step

no mask for this step

steps by process area

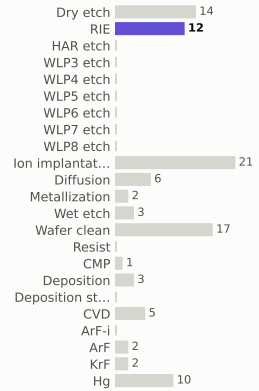

materials deposited (g)

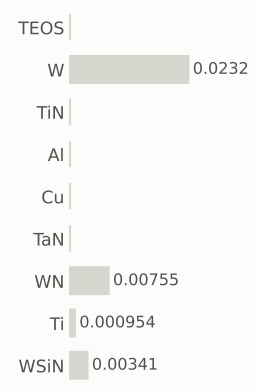

gases emitted (g)

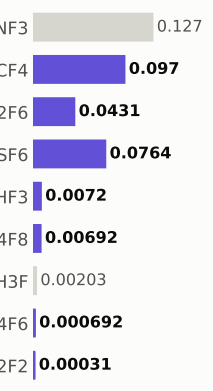

Step #1050: RIE

etch_anisotropic · RIE

1.04	89.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

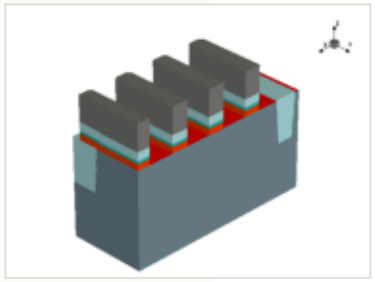

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

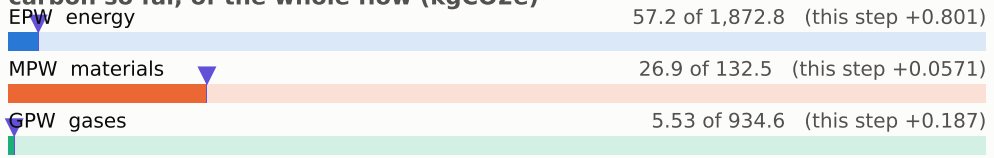

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

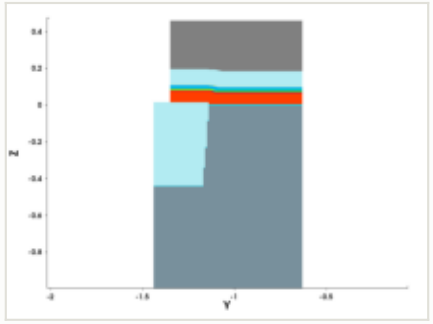

y cut at -1.035 µm

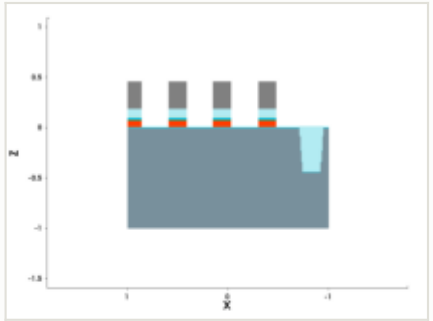

mask for this step

no mask for this step

steps by process area

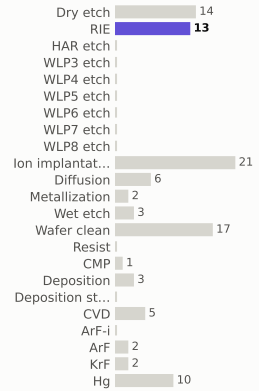

materials deposited (g)

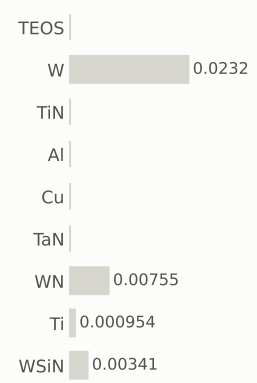

gases emitted (g)



Step #1060: RIE

etch_anisotropic · RIE

1.04	90.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

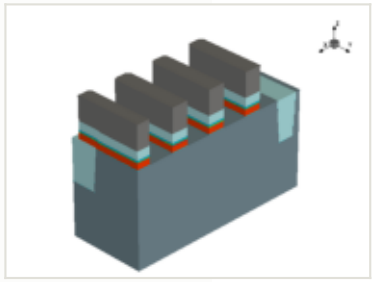

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

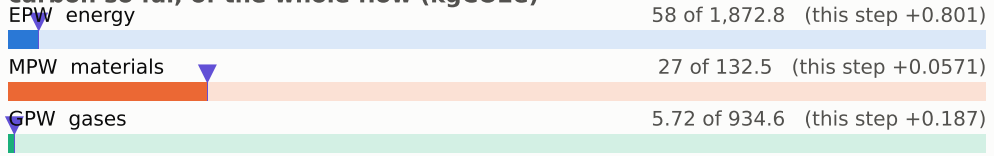

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

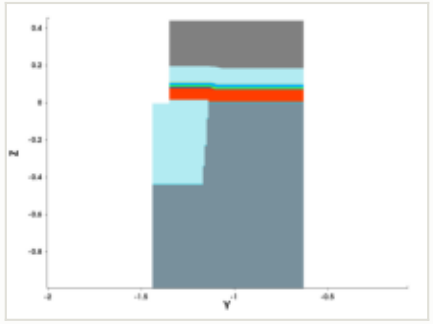

y cut at -1.035 µm

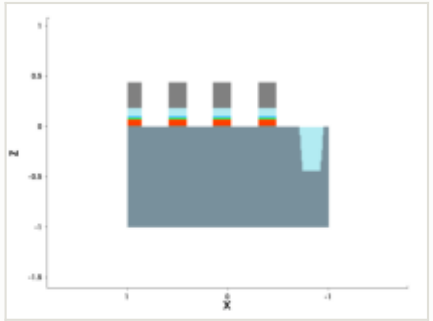

mask for this step

no mask for this step

steps by process area

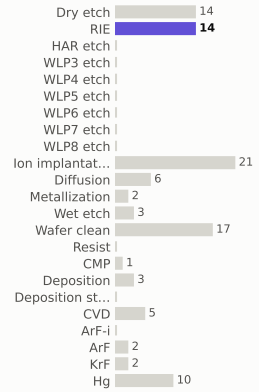

materials deposited (g)

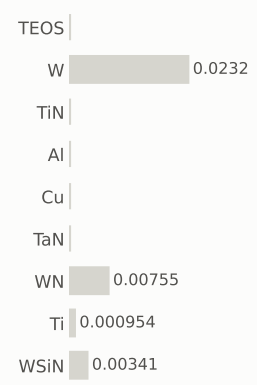

gases emitted (g)



Step #1070: Dry_etch

etch_strip · Dry_etch

0.801	91.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

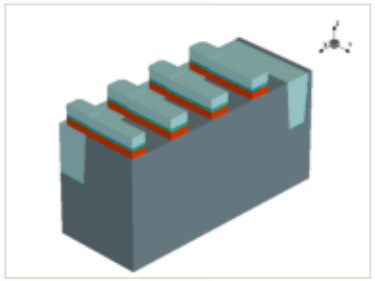

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

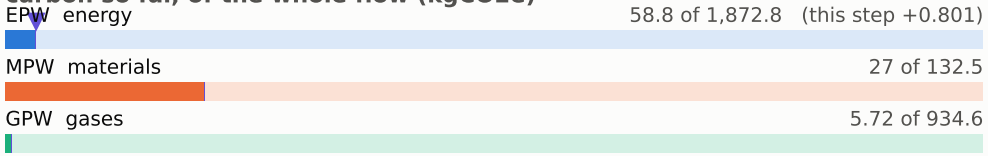

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

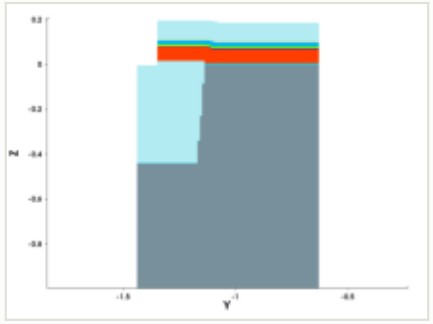

y cut at -1.035 µm

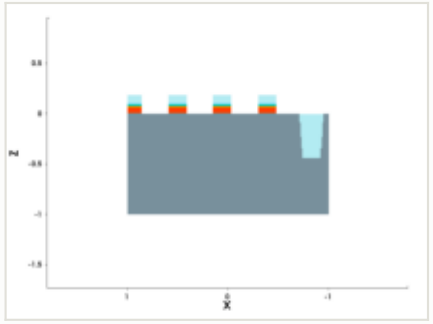

mask for this step

no mask for this step

steps by process area



materials deposited (g)

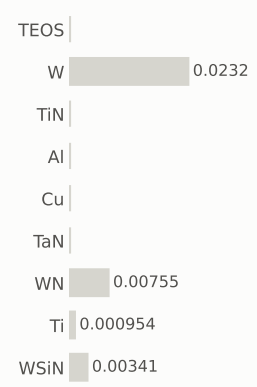

gases emitted (g)

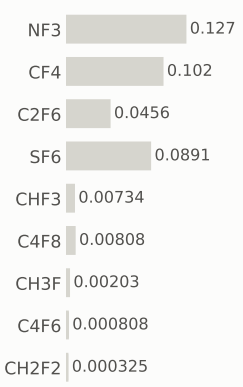

Step #1080: Wafer_clean

clean · Wafer_clean

0.169	91.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

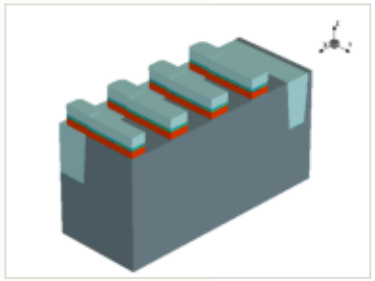

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

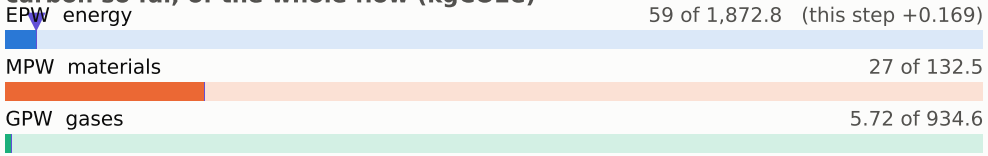

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

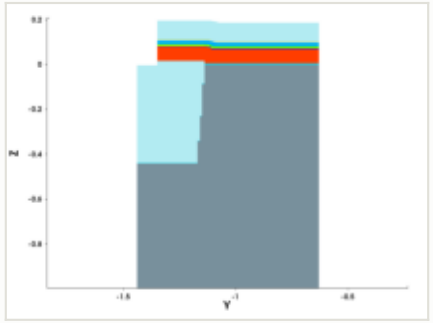

y cut at -1.035 µm

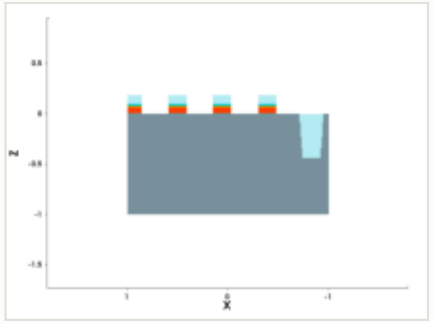

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

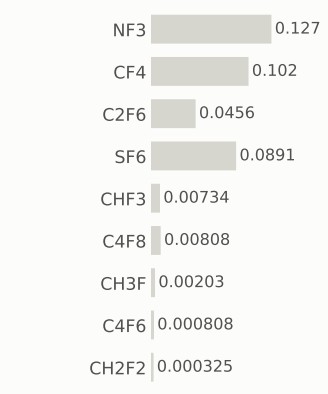

Step #1090: KrF

litho_patterning · KrF

0.199	91.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

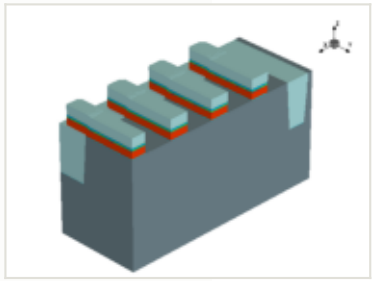

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

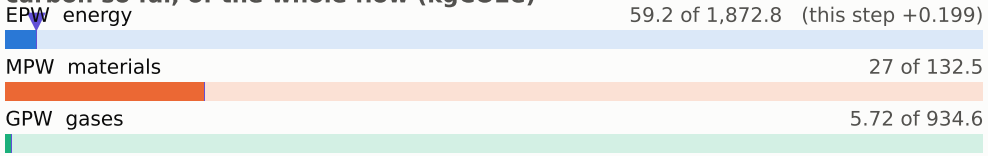

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

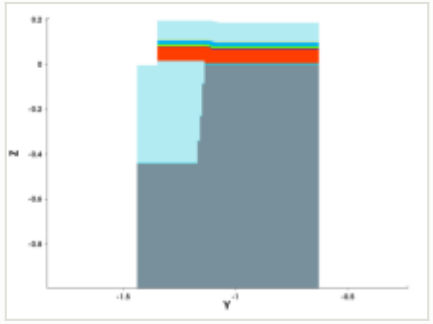

y cut at -1.035 µm

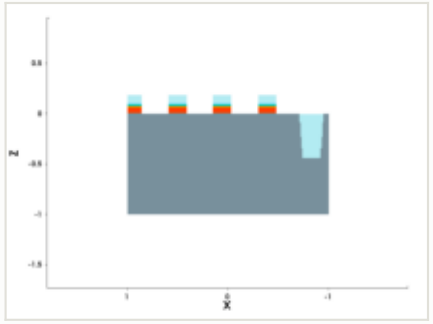

mask: layer 15:0 (OASIS)

steps by process area

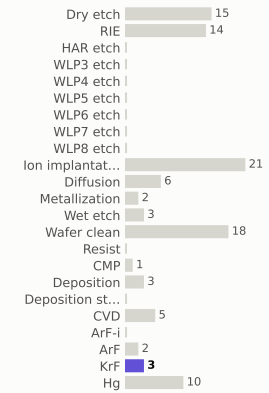

materials deposited (g)

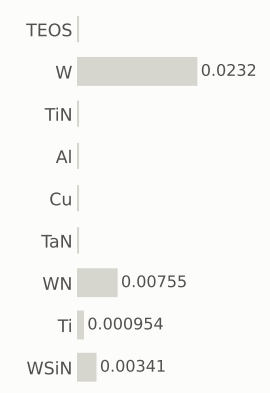

gases emitted (g)

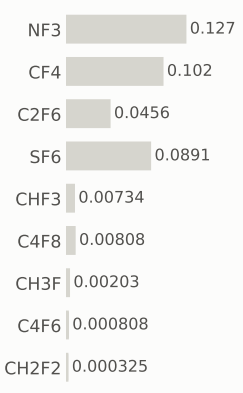

Step #1100: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	92.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

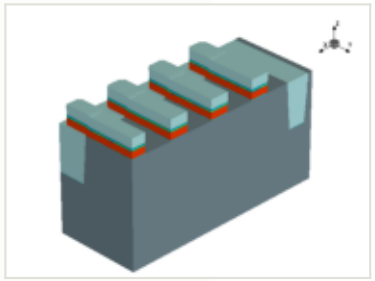

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

EPW energy — 60 of 1,872.8 (this step +0.801)

MPW materials — 27 of 132.5

GPW gases — 5.72 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

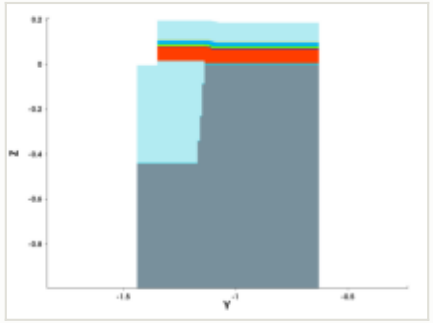

y cut at -1.035 µm

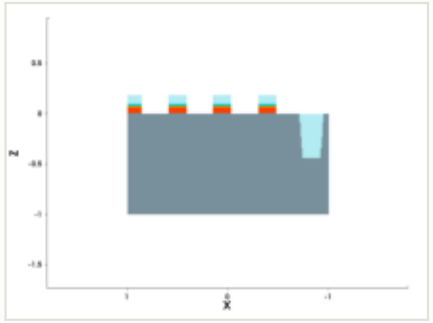

mask for this step

no mask for this step

steps by process area

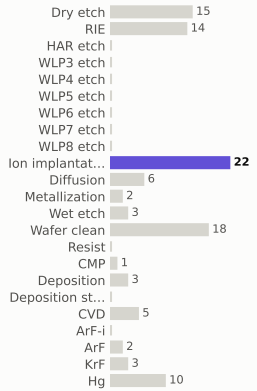

materials deposited (g)

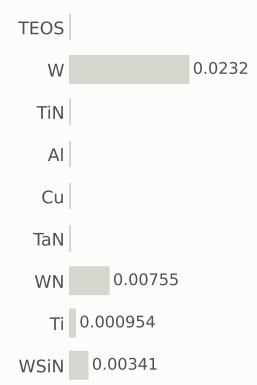

gases emitted (g)



Step #1110: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	93.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

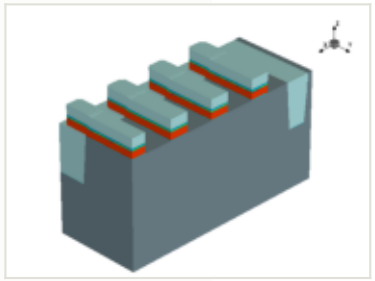

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

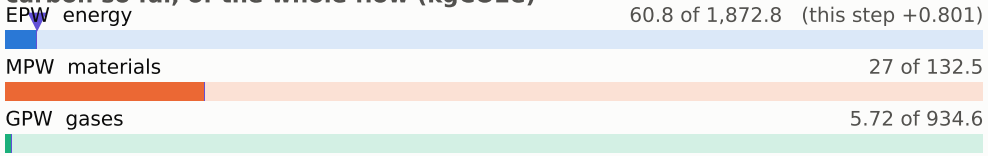

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

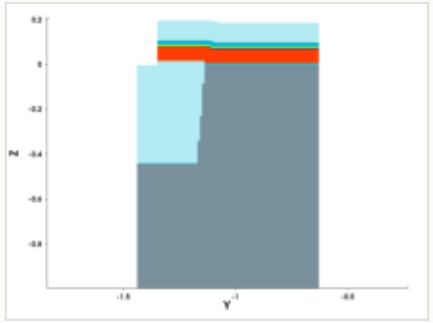

y cut at -1.035 µm

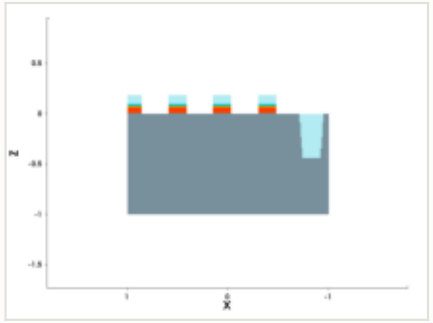

mask for this step

no mask for this step

steps by process area

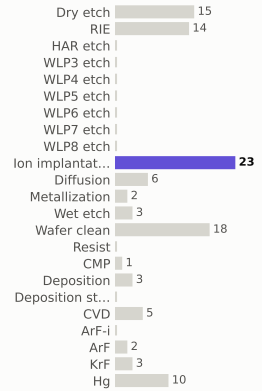

materials deposited (g)

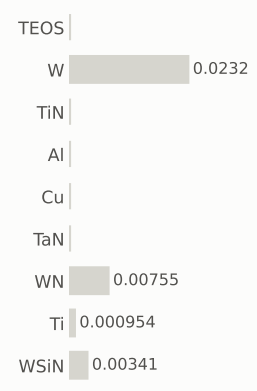

gases emitted (g)



Step #1120: Dry_etch

etch_strip · Dry_etch

0.801	94.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

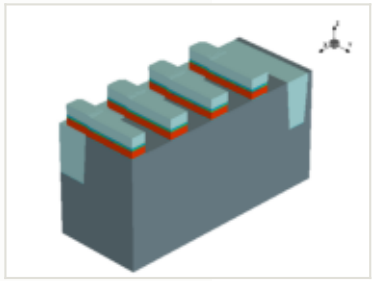

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

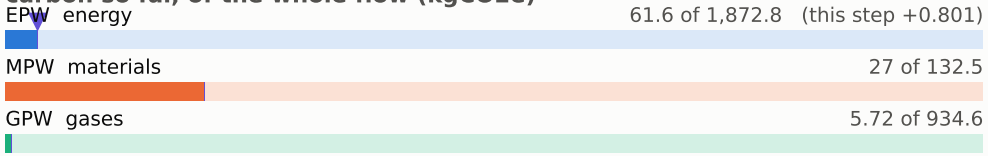

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

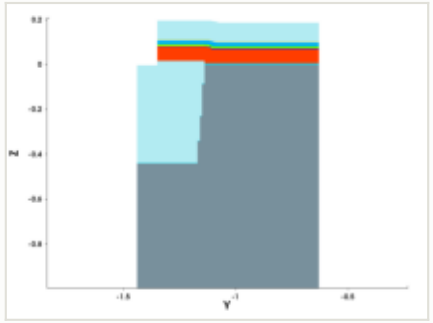

y cut at -1.035 µm

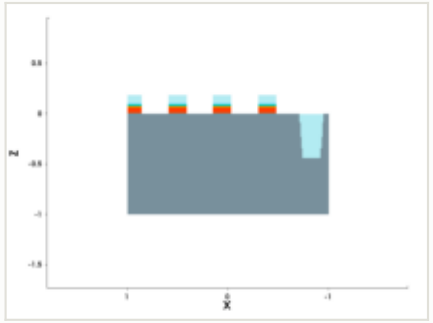

mask for this step

no mask for this step

steps by process area



materials deposited (g)

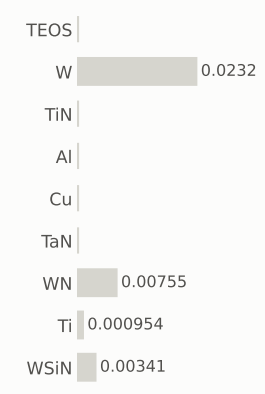

gases emitted (g)

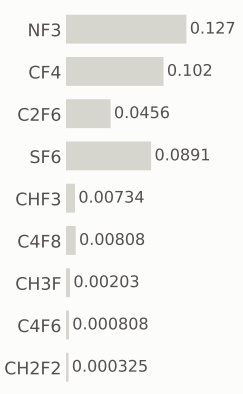

Step #1130: Wafer_clean

clean · Wafer_clean

0.169	94.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

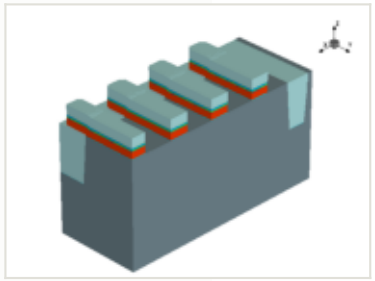

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

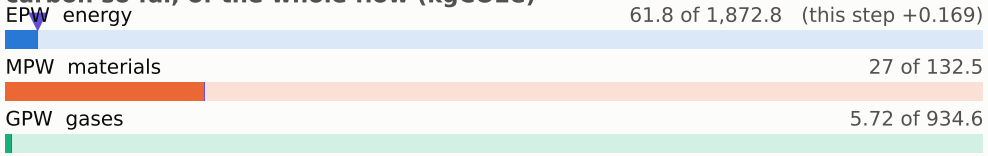

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

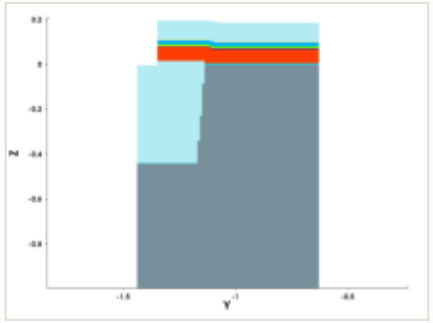

y cut at -1.035 µm

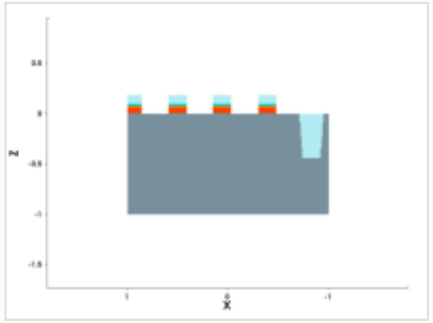

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

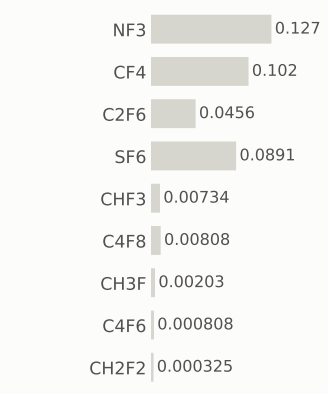

Step #1140: KrF

litho_patterning · KrF

0.199	94.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

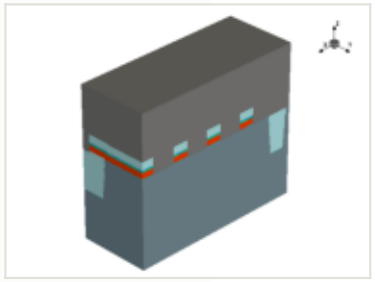

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

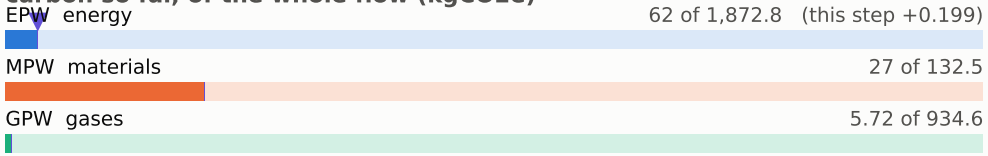

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

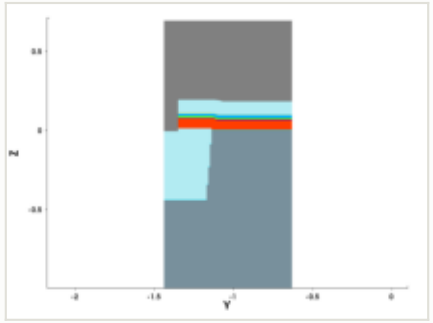

y cut at -1.035 µm

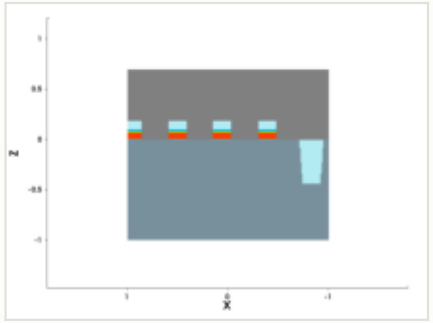

mask: layer 16:0, positive (OASIS)

steps by process area

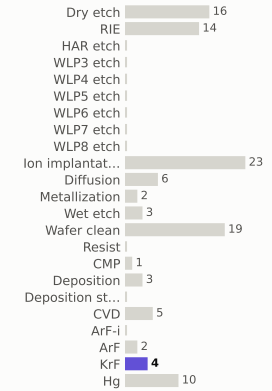

materials deposited (g)

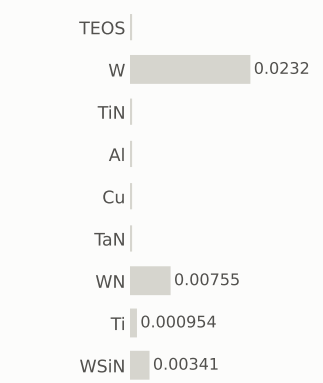

gases emitted (g)

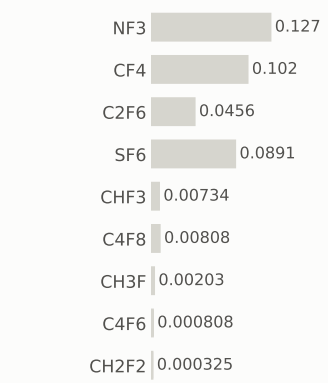

Step #1150: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	95.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

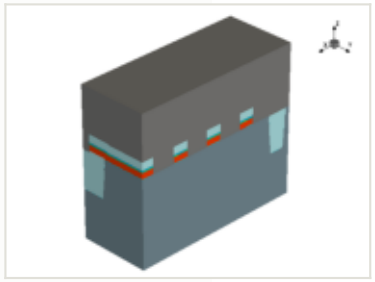

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

EPW energy — 62.8 of 1,872.8 (this step +0.801)

MPW materials — 27 of 132.5

GPW gases — 5.72 of 934.6

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

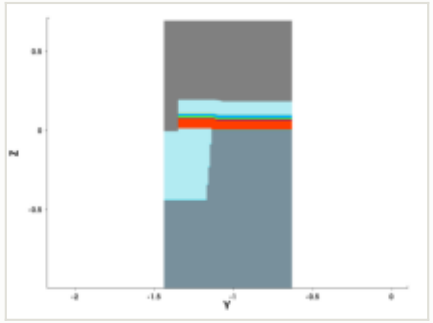

y cut at -1.035 µm

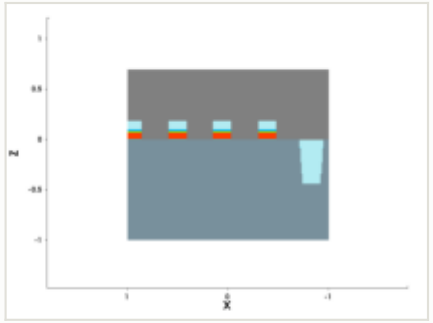

mask for this step

no mask for this step

steps by process area



materials deposited (g)

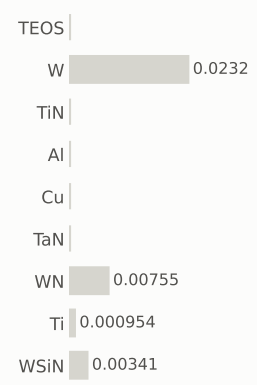

gases emitted (g)



Step #1160: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	96.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

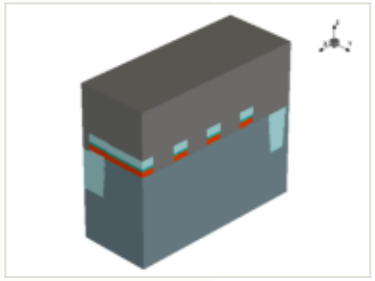

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

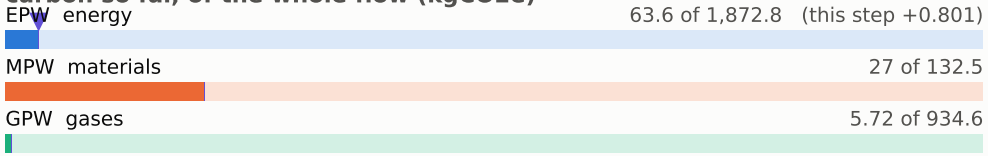

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

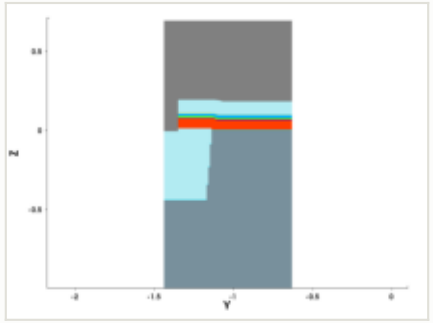

y cut at -1.035 µm

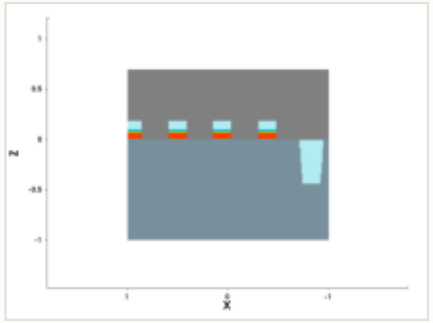

mask for this step

no mask for this step

steps by process area

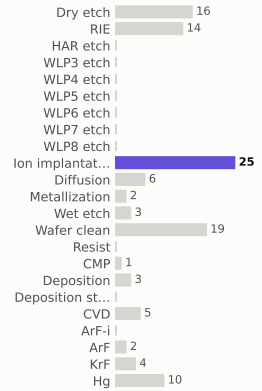

materials deposited (g)

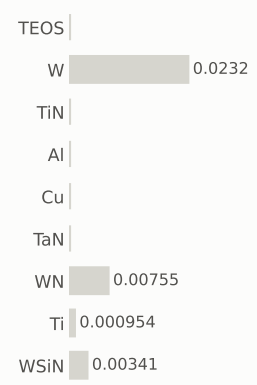

gases emitted (g)



Step #1170: Dry_etch

etch_strip · Dry_etch

0.801	97	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

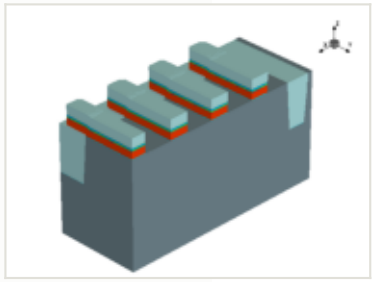

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

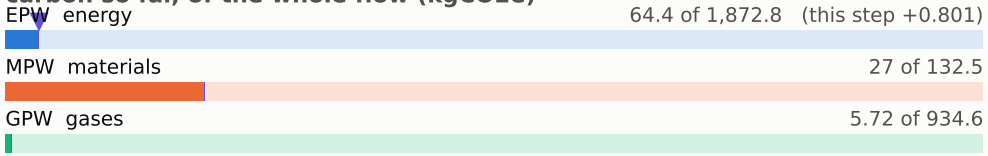

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

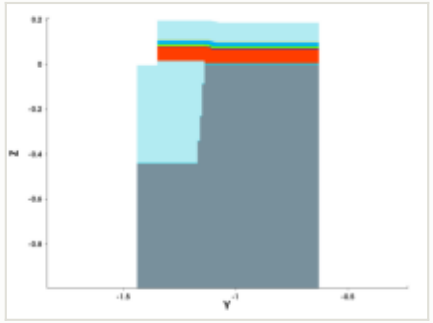

y cut at -1.035 µm

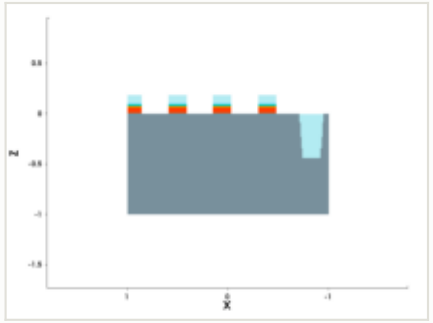

mask for this step

no mask for this step

steps by process area

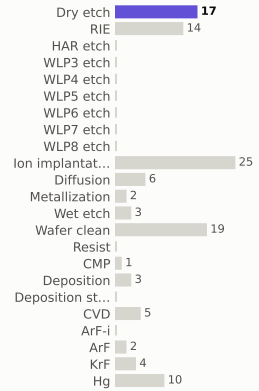

materials deposited (g)

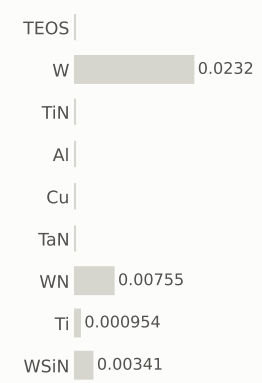

gases emitted (g)

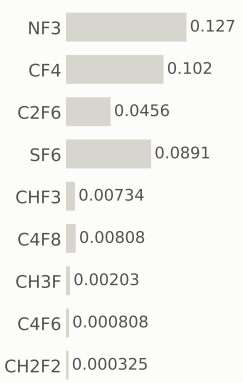

Step #1180: Wafer_clean

clean · Wafer_clean

0.169	97.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

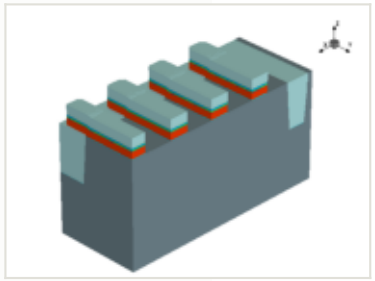

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

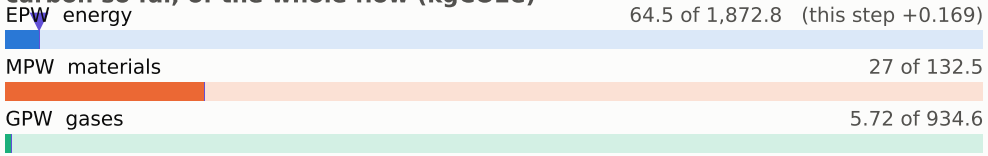

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

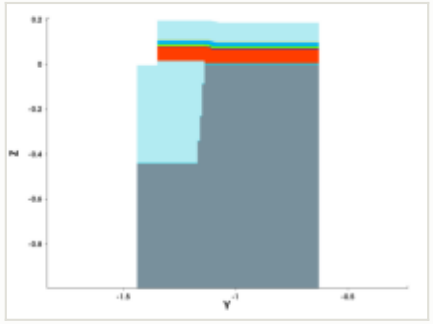

y cut at -1.035 µm

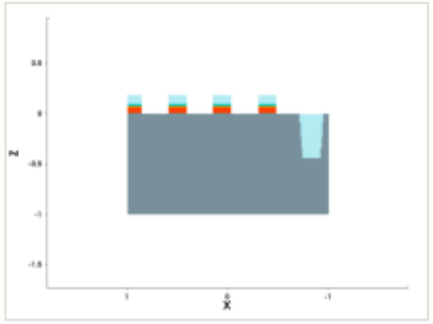

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #1190: CVD

depo_isotropic · CVD

1.31	98.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

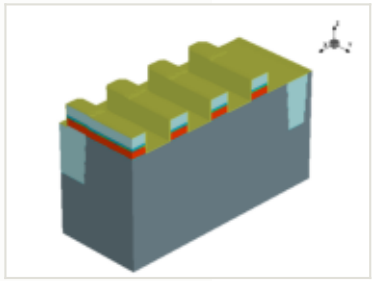

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

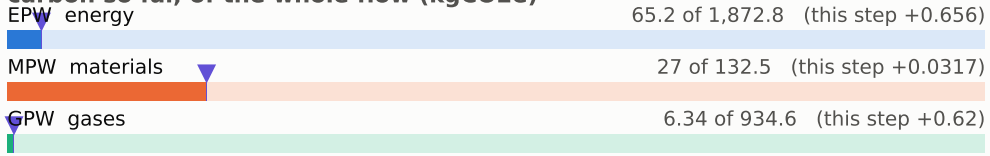

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

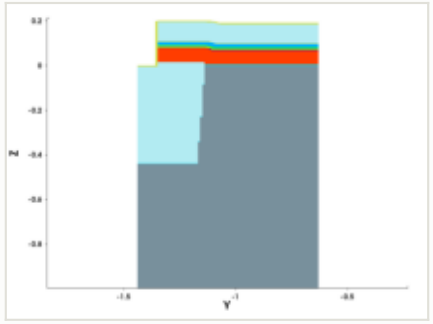

y cut at -1.035 µm

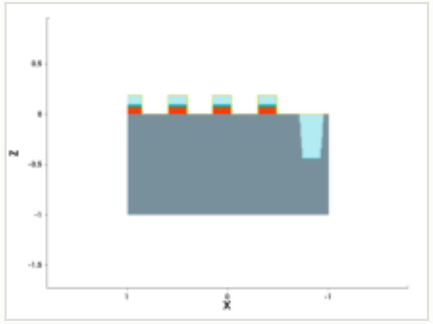

mask for this step

no mask for this step

steps by process area

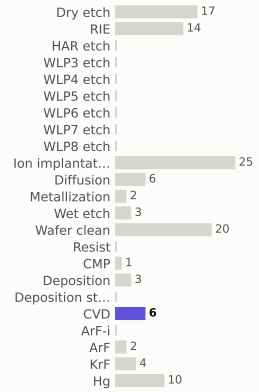

materials deposited (g)

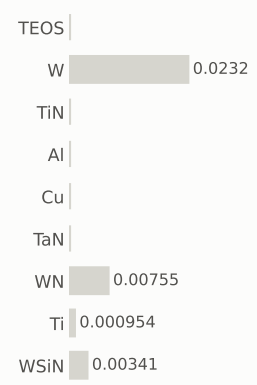

gases emitted (g)

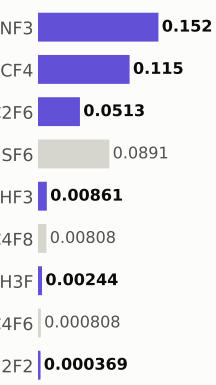

Step #1200: CVD

depo_isotropic · CVD

1.31	99.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

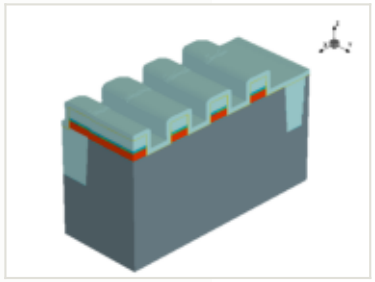

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.044 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

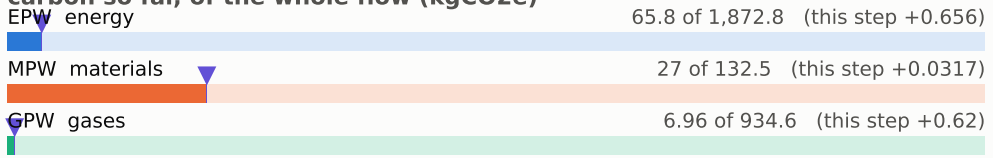

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

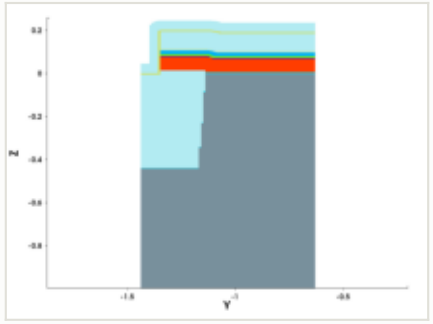

y cut at -1.035 µm

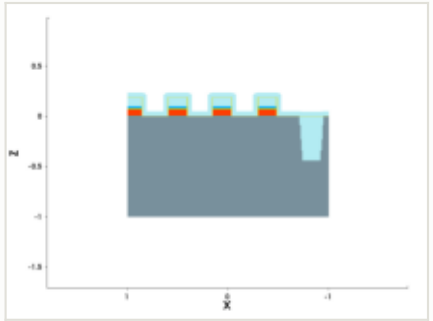

mask for this step

no mask for this step

steps by process area

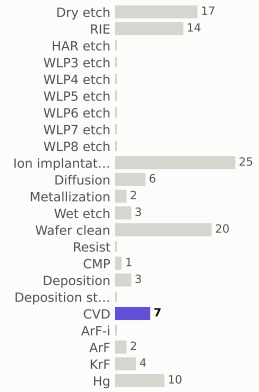

materials deposited (g)

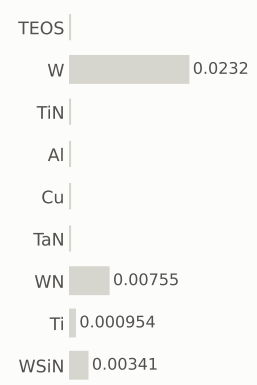

gases emitted (g)



Step #1210: RIE

etch_anisotropic · RIE

1.04	100.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

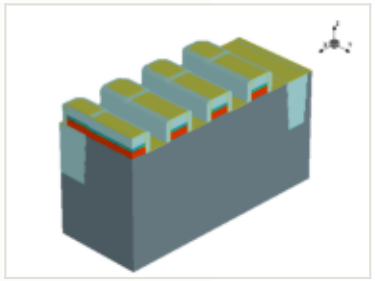

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

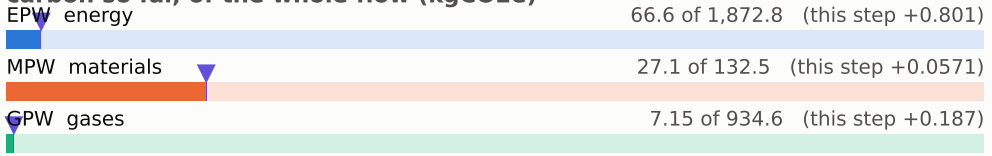

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

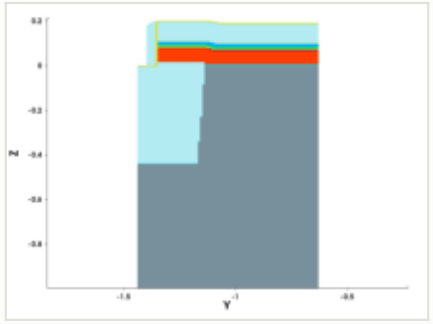

y cut at -1.035 µm

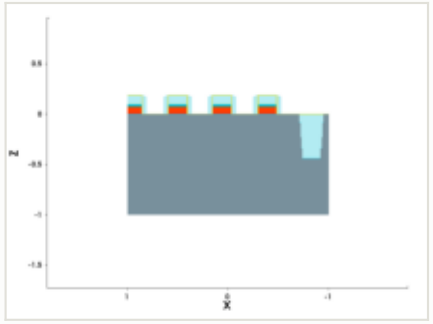

mask for this step

no mask for this step

steps by process area

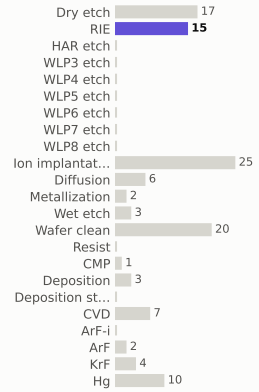

materials deposited (g)

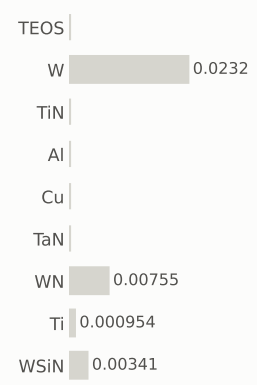

gases emitted (g)



Step #1220: RIE

etch_anisotropic · RIE

1.04	101.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

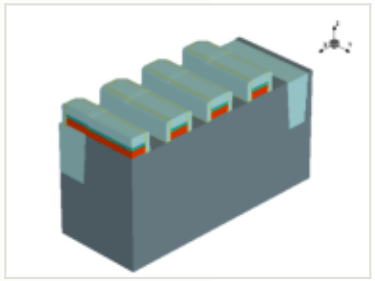

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

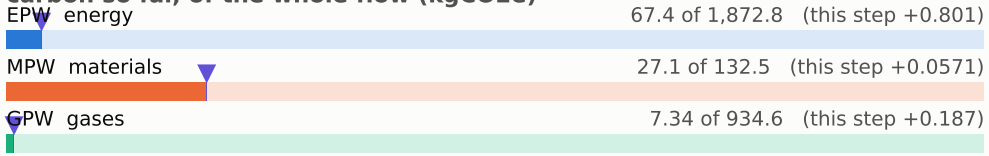

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

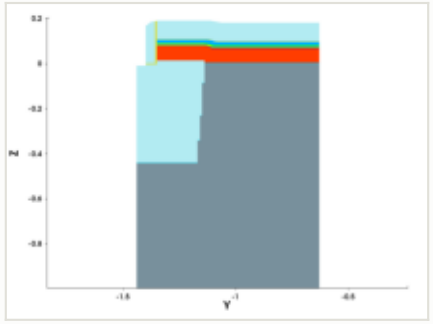

y cut at -1.035 µm

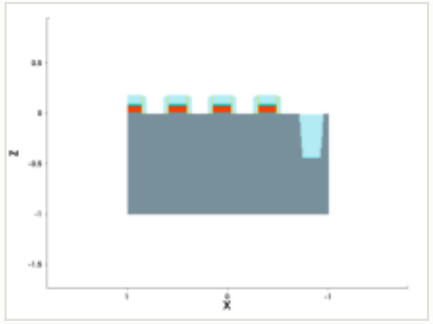

mask for this step

no mask for this step

steps by process area

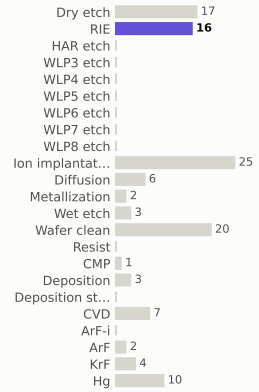

materials deposited (g)

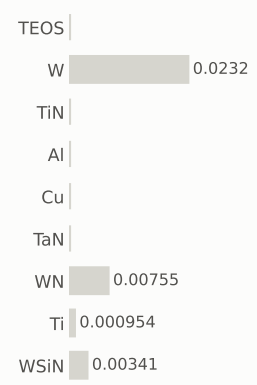

gases emitted (g)



Step #1230: RIE

etch_anisotropic · RIE

1.04	103.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

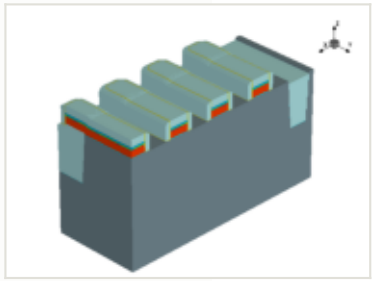

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

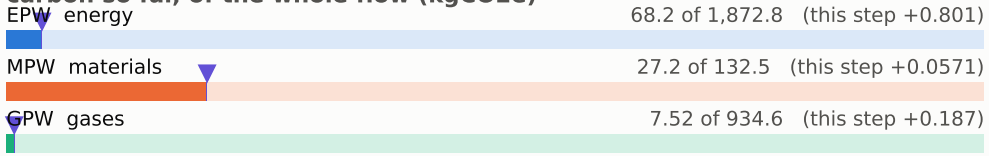

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

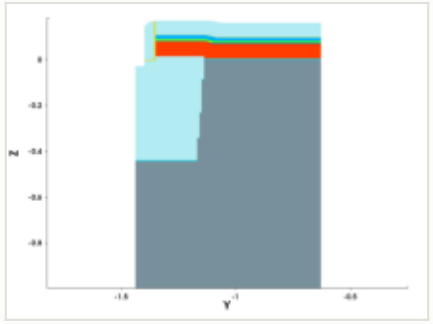

y cut at -1.035 µm

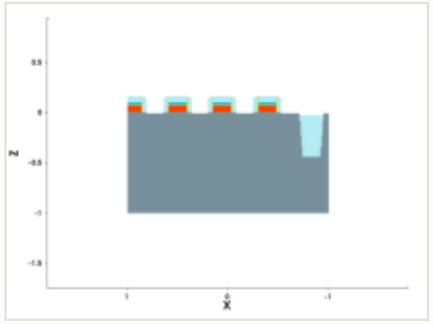

mask for this step

no mask for this step

steps by process area

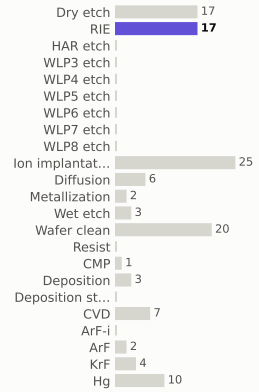

materials deposited (g)



gases emitted (g)



Step #1240: KrF

litho_patterning · KrF

0.199	103.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

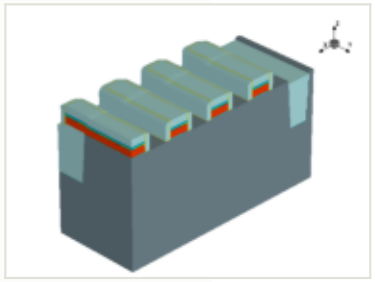

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

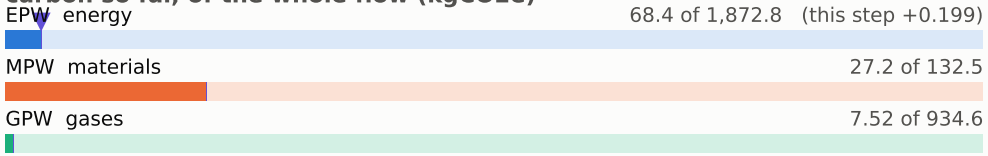

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

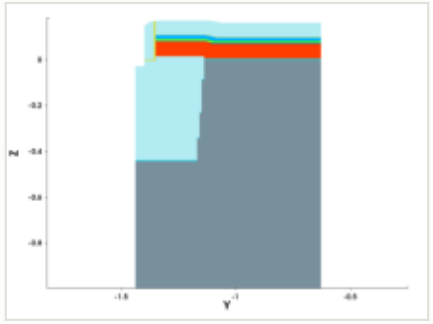

y cut at -1.035 µm

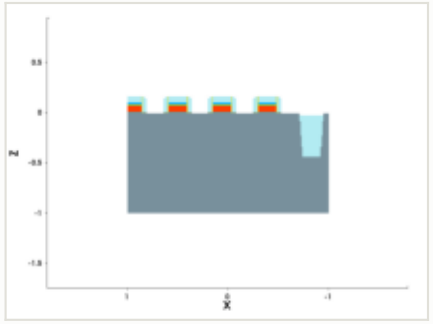

mask: layer 17:0 (OASIS)

steps by process area

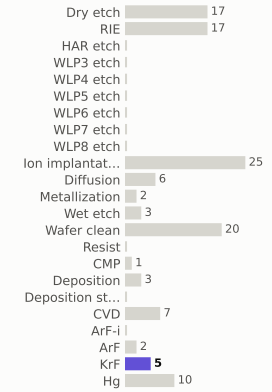

materials deposited (g)

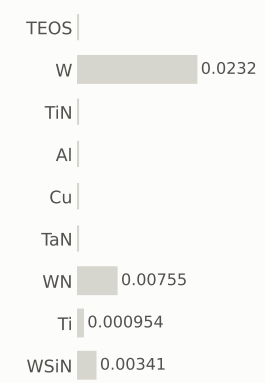

gases emitted (g)

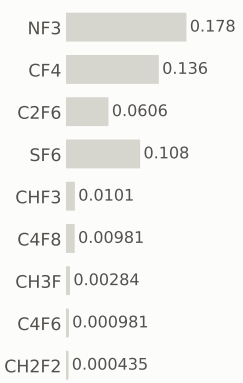

Step #1250: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	104.0	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

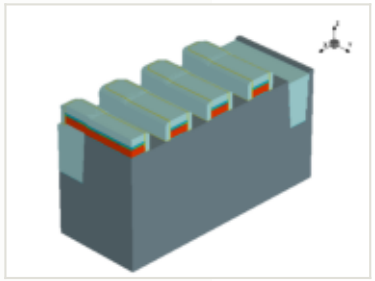

x cut at 0.000 µm

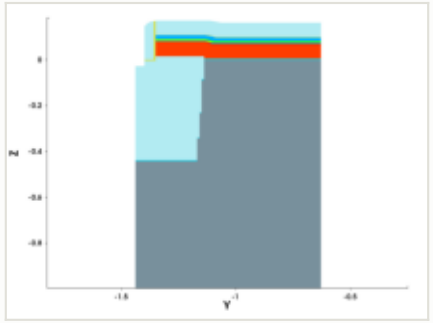

y cut at -1.035 µm

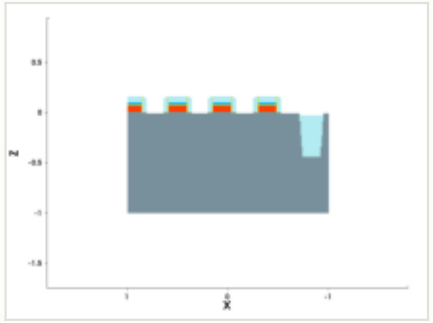

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

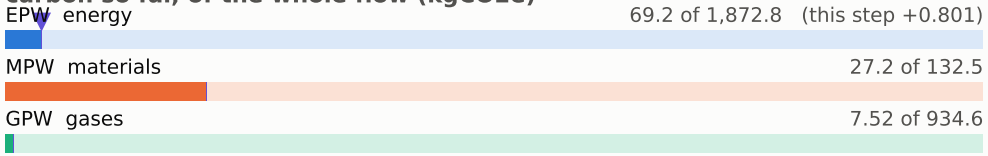

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

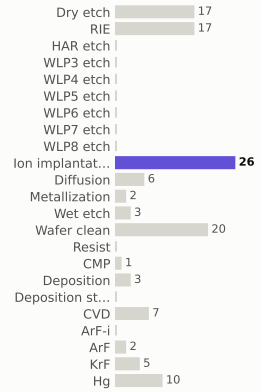

materials deposited (g)

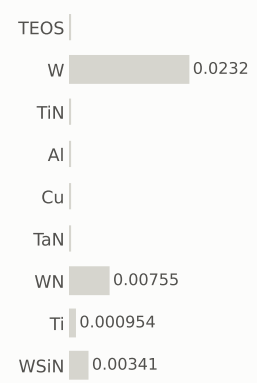

gases emitted (g)

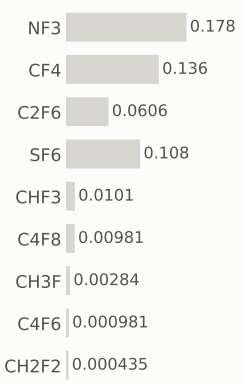

Step #1260: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	104.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

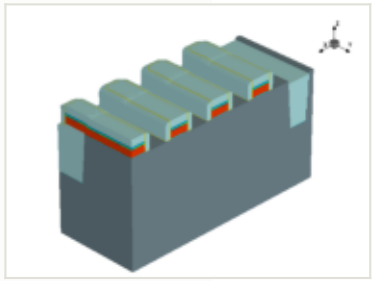

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

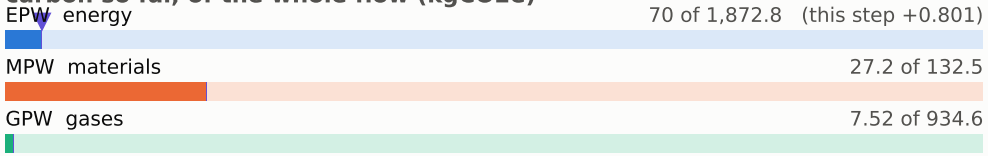

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

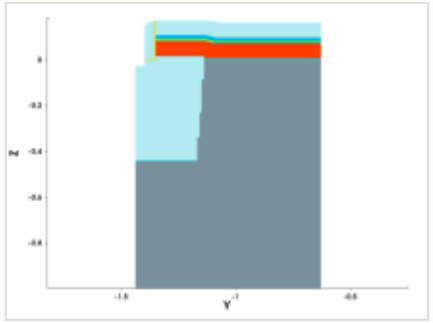

y cut at -1.035 µm

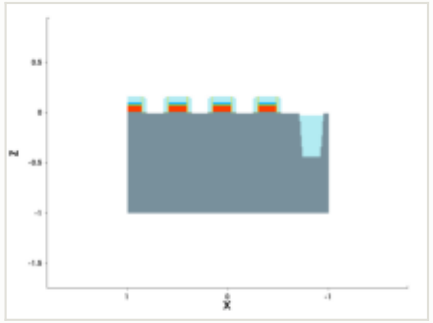

mask for this step

no mask for this step

steps by process area

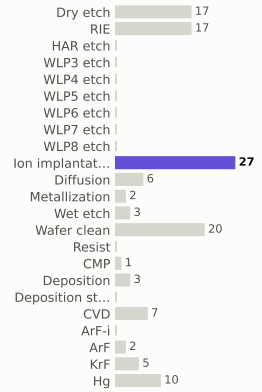

materials deposited (g)



gases emitted (g)



Step #1270: Dry_etch

etch_strip · Dry_etch

0.801	105.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

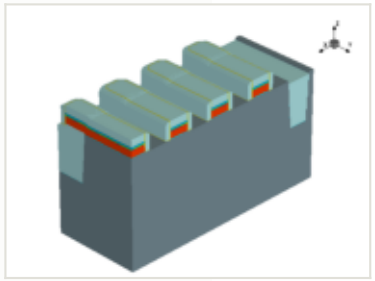

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

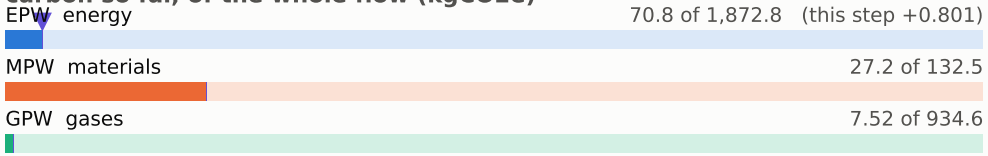

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

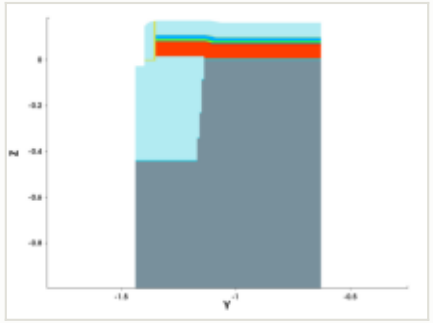

y cut at -1.035 µm

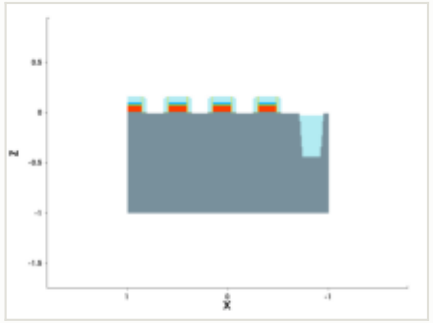

mask for this step

no mask for this step

steps by process area

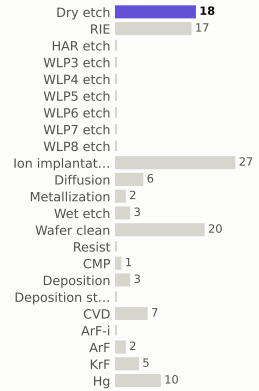

materials deposited (g)

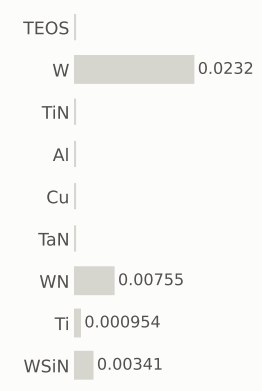

gases emitted (g)

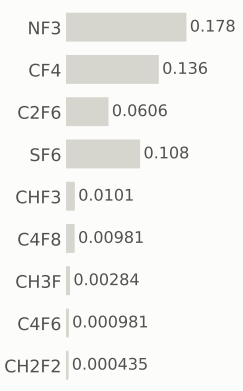

Step #1280: Wafer_clean

clean · Wafer_clean

0.169	105.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

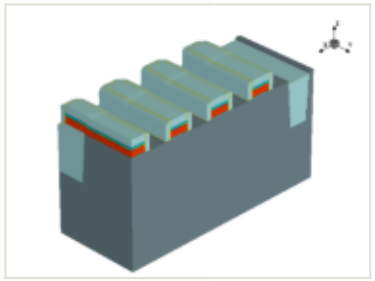

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

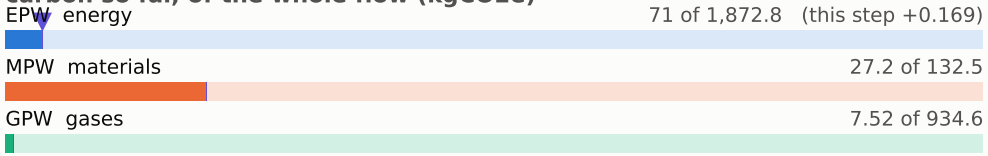

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

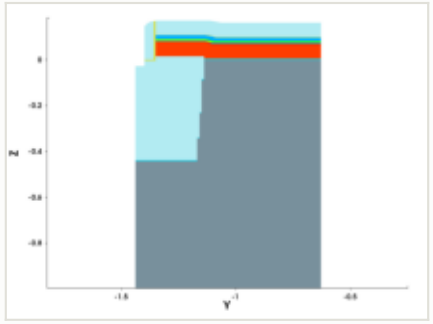

y cut at -1.035 µm

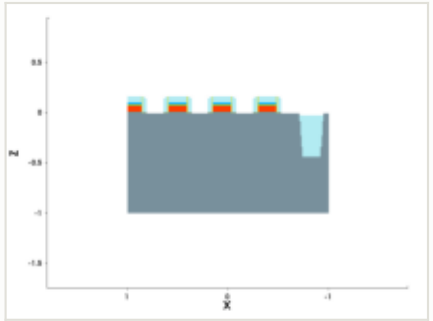

mask for this step

no mask for this step

steps by process area

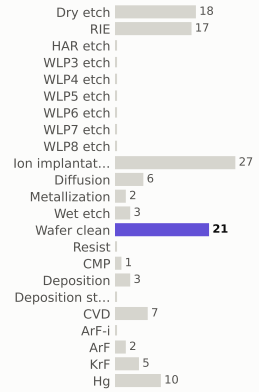

materials deposited (g)

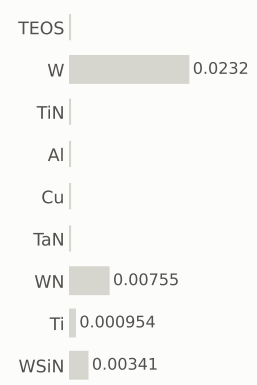

gases emitted (g)

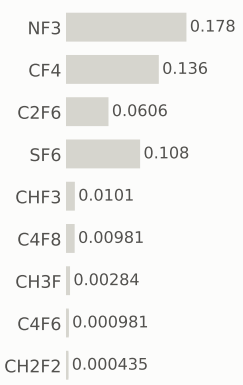

Step #1290: KrF

litho_patterning · KrF

0.199	105.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

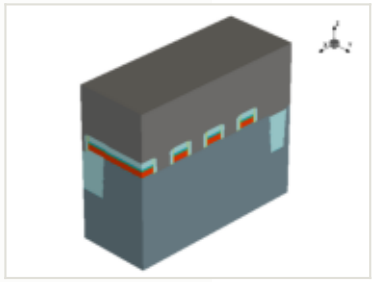

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

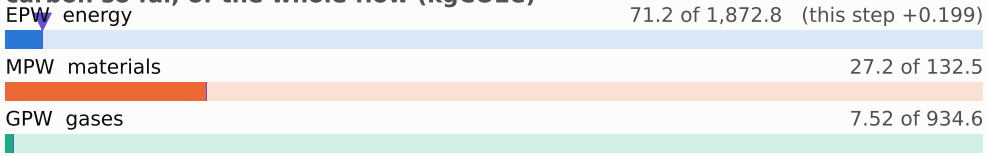

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

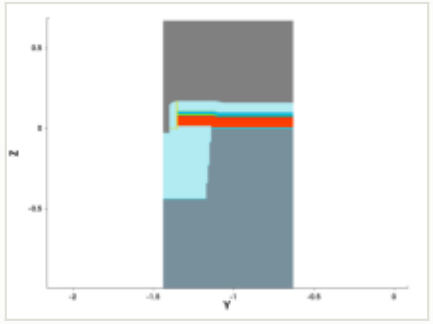

y cut at -1.035 µm

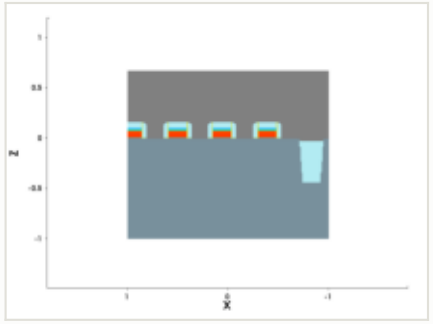

mask: layer 18:0, positive (OASIS)

steps by process area

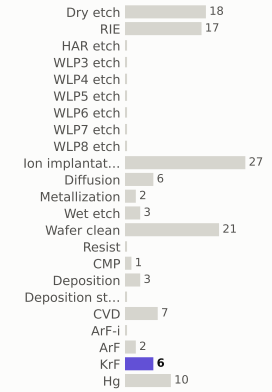

materials deposited (g)

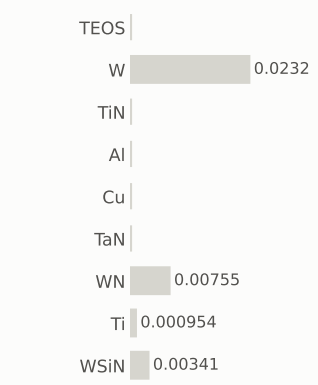

gases emitted (g)

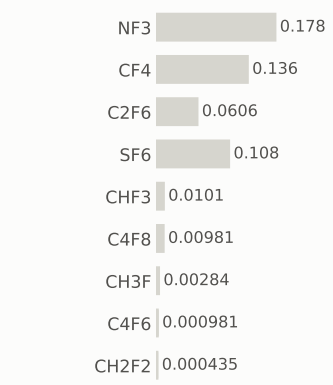

Step #1300: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	106.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

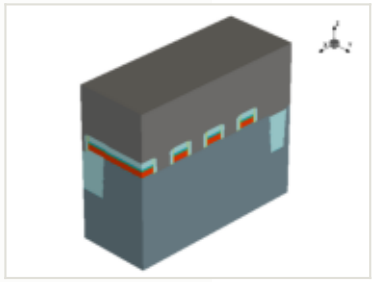

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

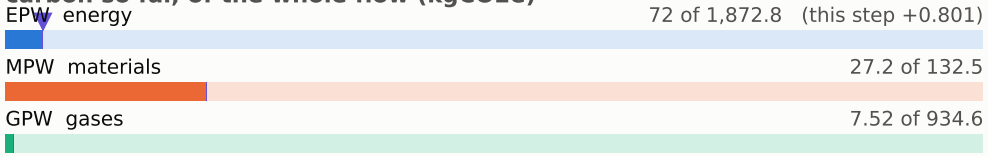

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

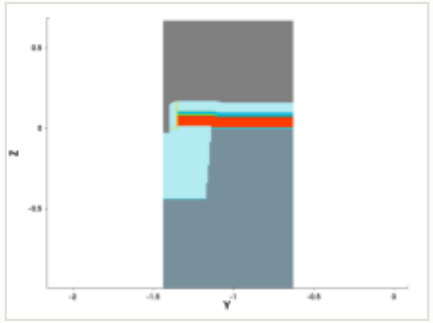

y cut at -1.035 µm

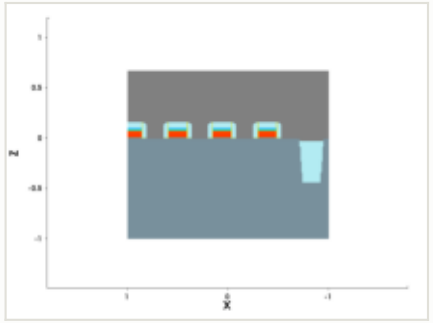

mask for this step

no mask for this step

steps by process area

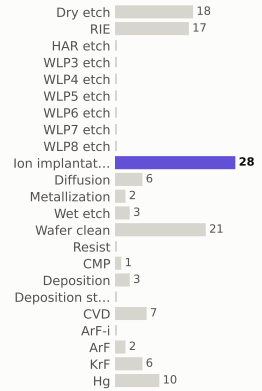

materials deposited (g)

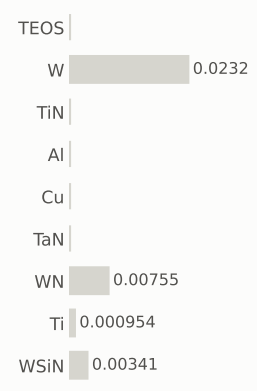

gases emitted (g)



Step #1310: Dry_etch

etch_strip · Dry_etch

0.801	107.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

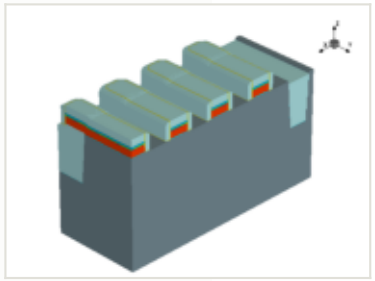

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

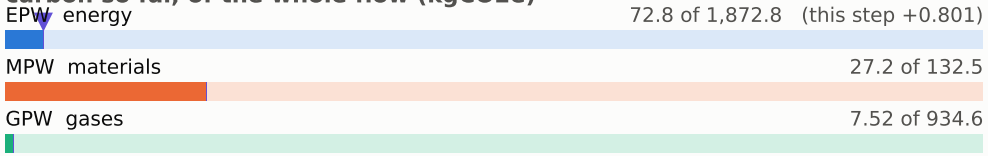

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

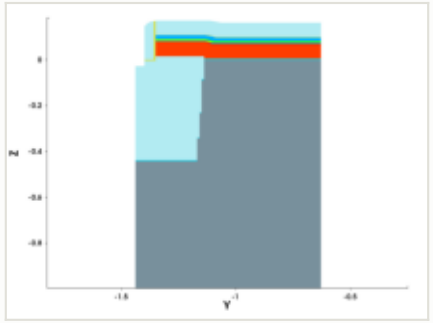

y cut at -1.035 µm

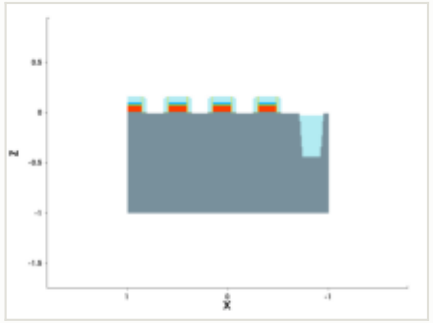

mask for this step

no mask for this step

steps by process area

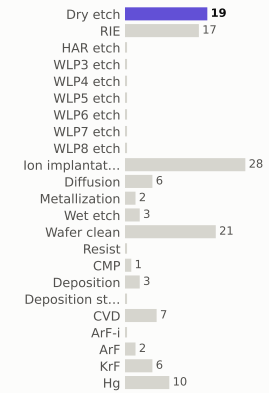

materials deposited (g)

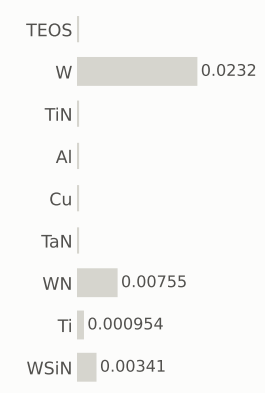

gases emitted (g)

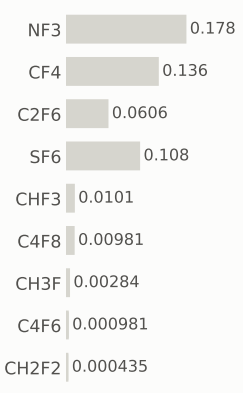

Step #1320: Wafer_clean

clean · Wafer_clean

0.169	107.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

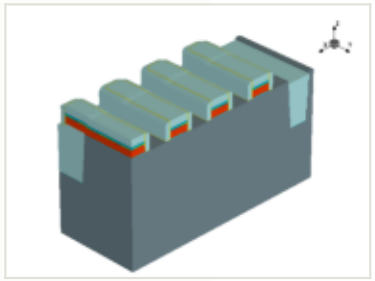

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

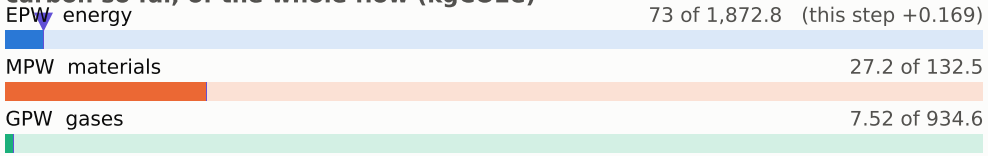

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

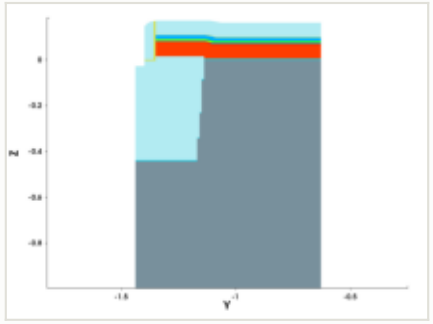

y cut at -1.035 µm

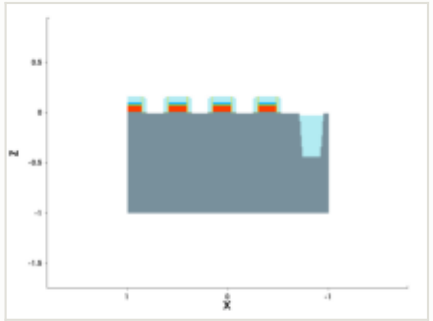

mask for this step

no mask for this step

steps by process area

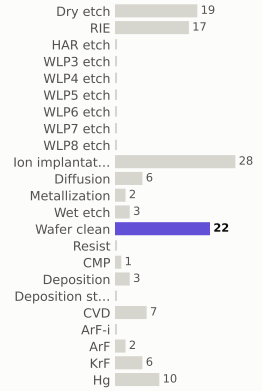

materials deposited (g)



gases emitted (g)

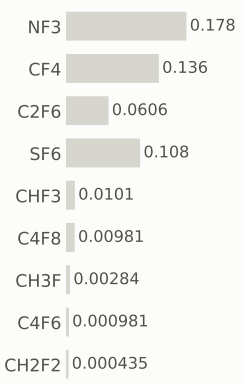

Step #1330: Diffusion

anneal · Diffusion

0.801	108.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

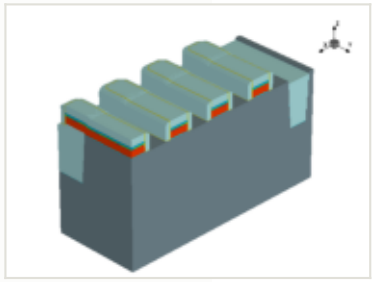

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

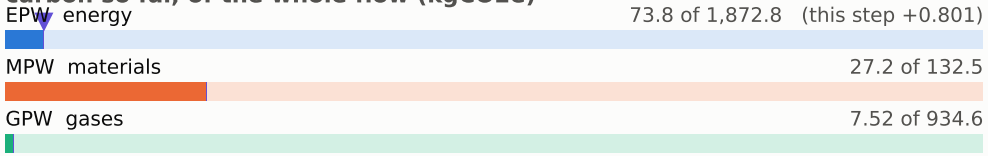

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

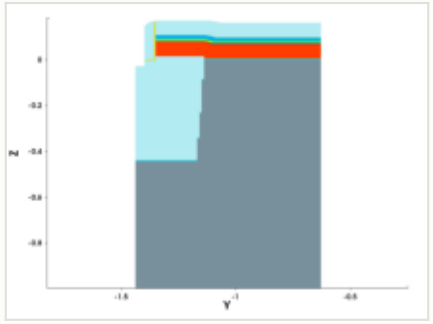

y cut at -1.035 µm

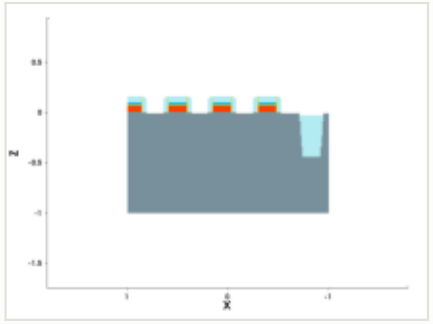

mask for this step

no mask for this step

steps by process area

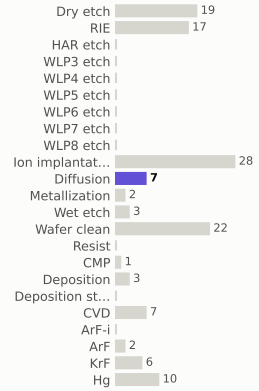

materials deposited (g)



gases emitted (g)

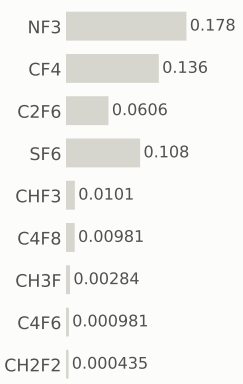

Step #1350: CVD

depo_isotropic · CVD

1.31	109.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

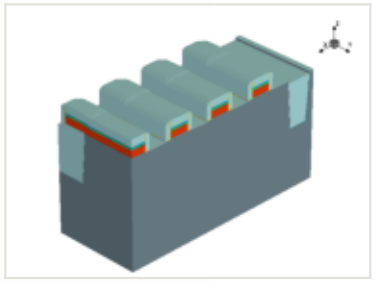

this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

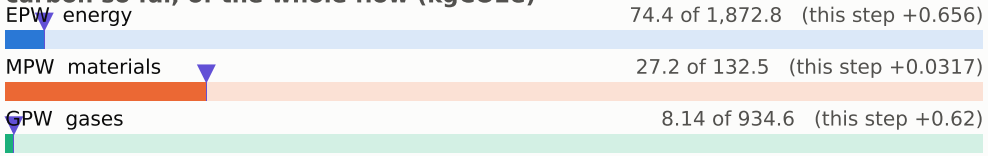

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

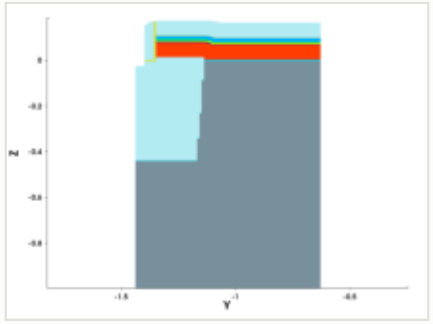

y cut at -1.035 µm

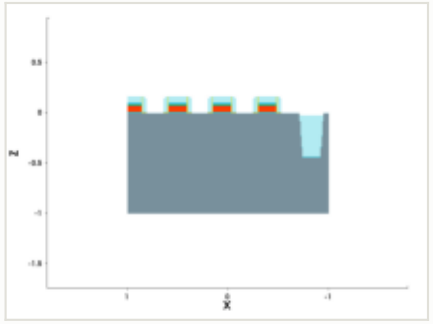

mask for this step

no mask for this step

steps by process area

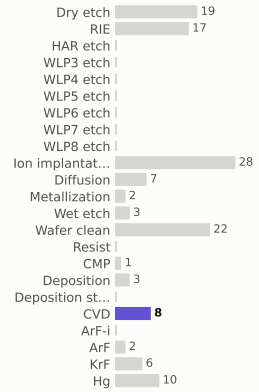

materials deposited (g)

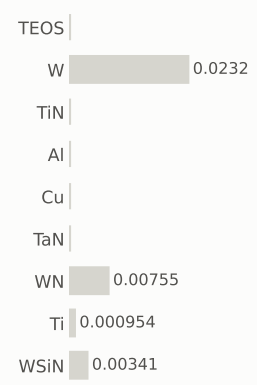

gases emitted (g)



Step #1360: CVD

depo_isotropic · CVD

1.31	111.1	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

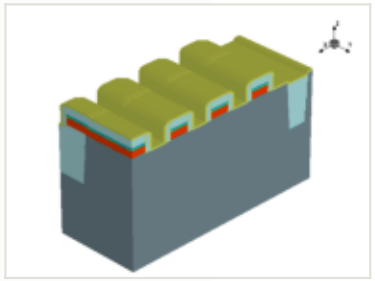

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.017 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

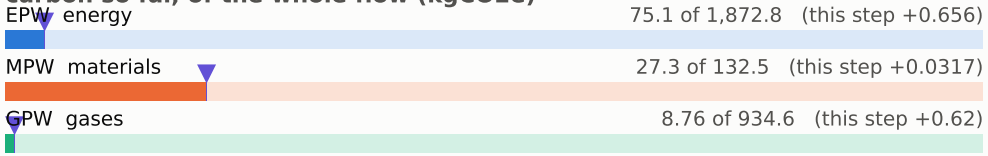

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

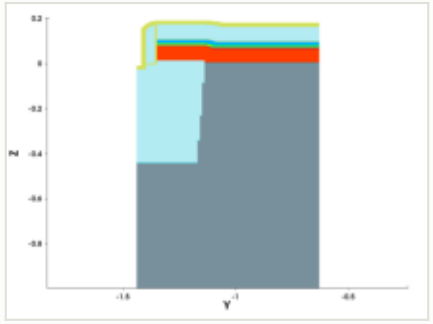

y cut at -1.035 µm

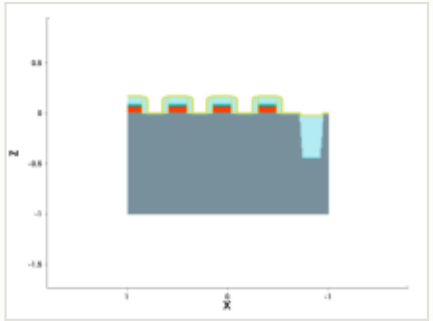

mask for this step

no mask for this step

steps by process area

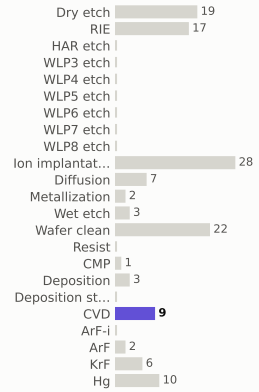

materials deposited (g)

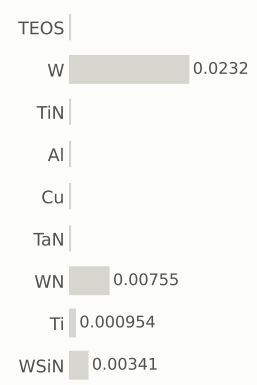

gases emitted (g)

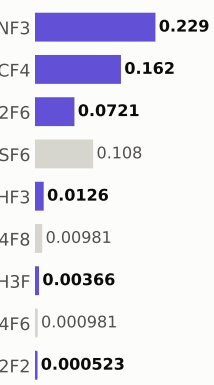

Step #1370: CVD

depo_isotropic · CVD

1.31	112.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

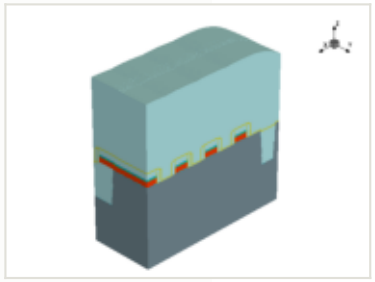

this step

process area	CVD
material	—
thickness	0.8 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

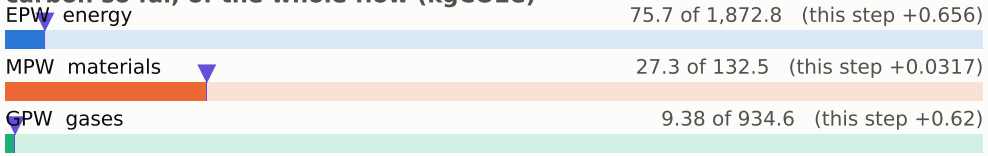

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

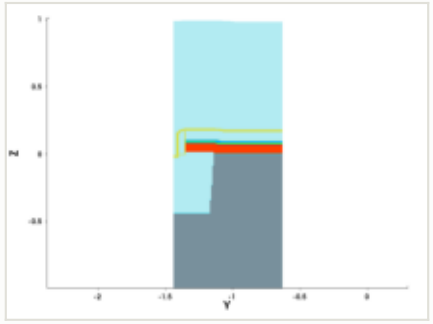

y cut at -1.035 µm

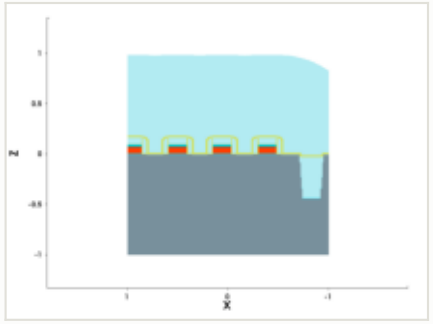

mask for this step

no mask for this step

steps by process area

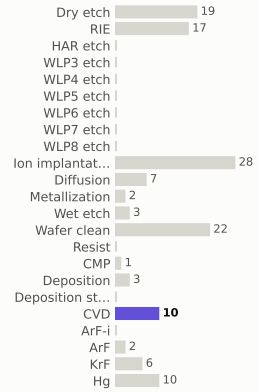

materials deposited (g)

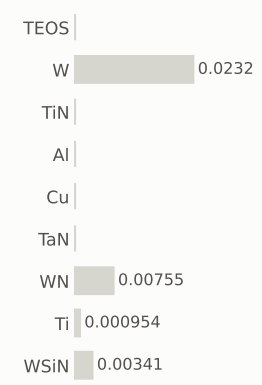

gases emitted (g)

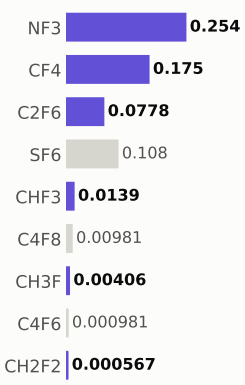

Step #1380: CMP

etch_cmp · CMP

0.169	112.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

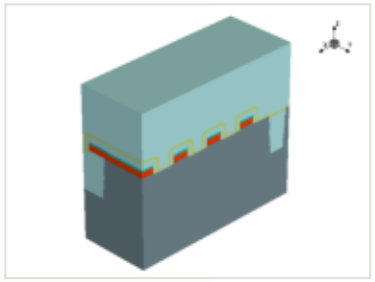

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

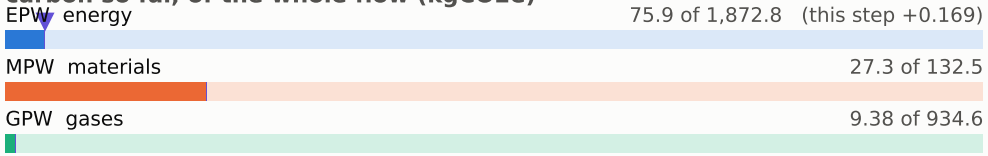

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

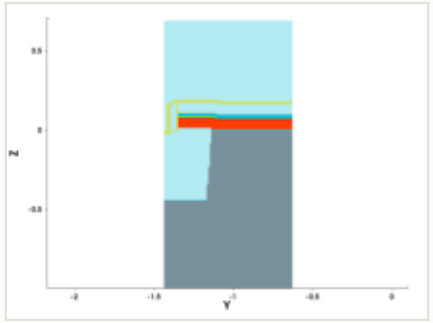

y cut at -1.035 µm

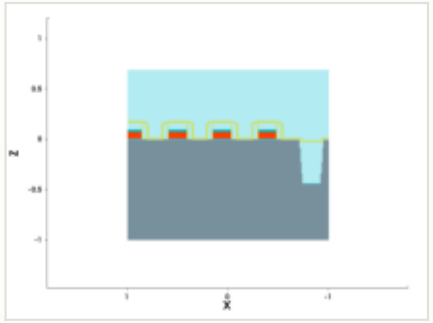

mask for this step

no mask for this step

steps by process area

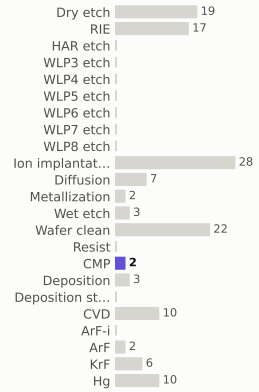

materials deposited (g)

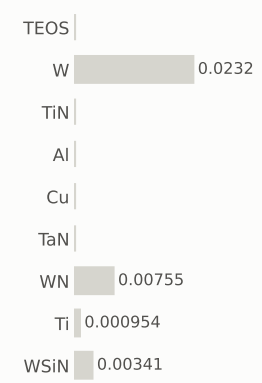

gases emitted (g)

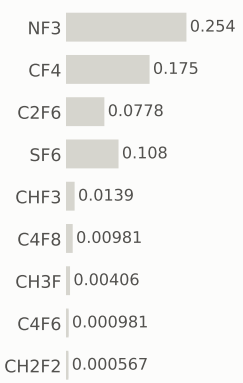

Step #1390: Wafer_clean

clean · Wafer_clean

0.169	112.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

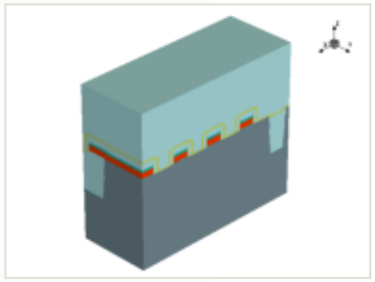

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

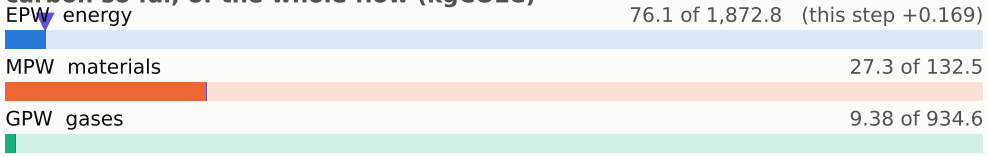

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

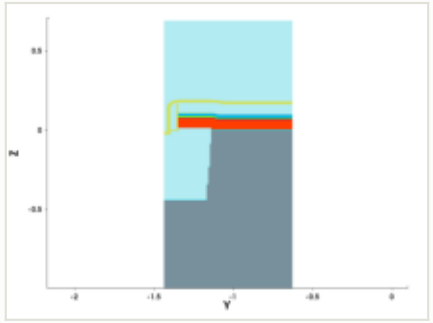

y cut at -1.035 µm

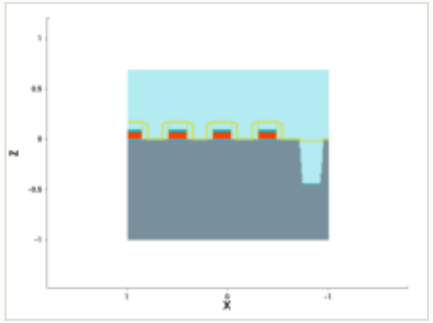

mask for this step

no mask for this step

steps by process area

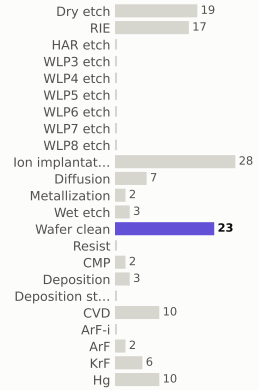

materials deposited (g)

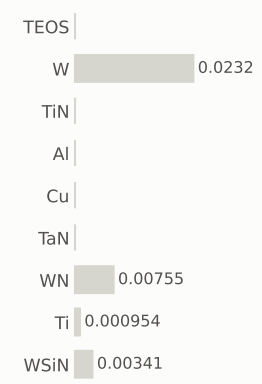

gases emitted (g)

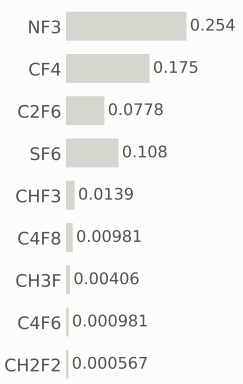

Step #1400: ArF

litho_patterning · ArF

0.199	113.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

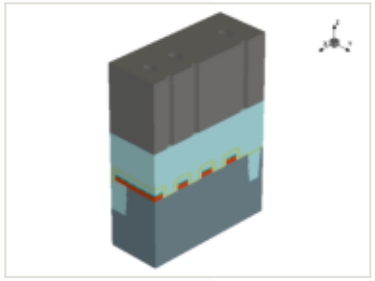

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

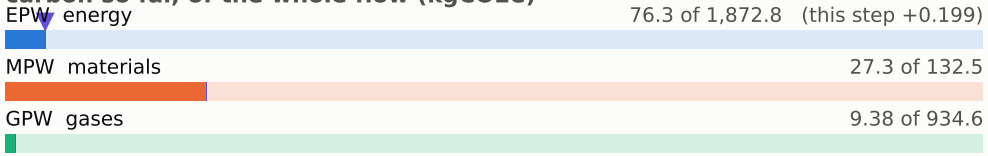

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

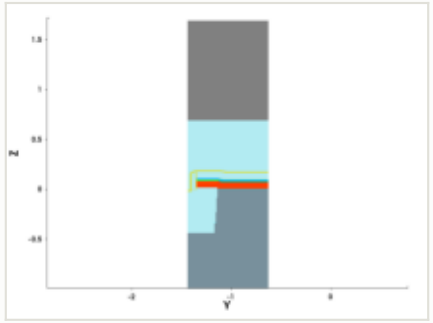

y cut at -1.035 µm

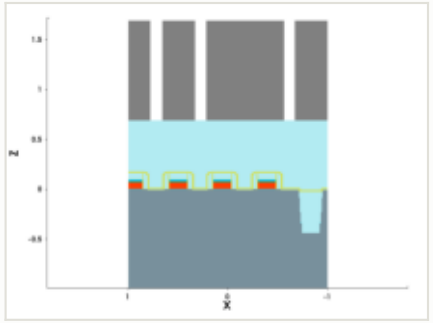

mask: layer 19:0 (OASIS)

steps by process area

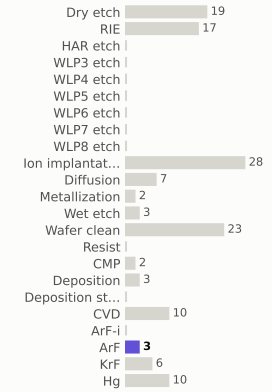

materials deposited (g)



gases emitted (g)

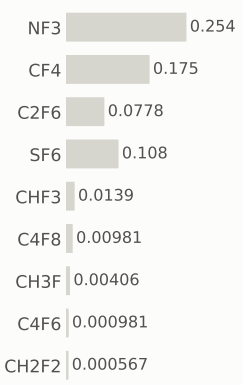

Step #1410: RIE

etch_anisotropic · RIE

1.04	114.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

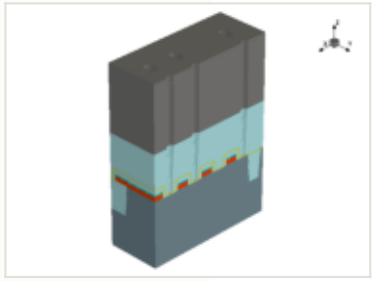

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

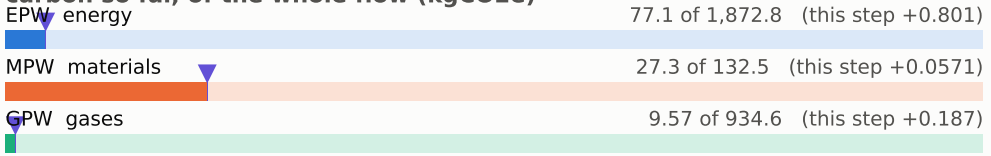

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

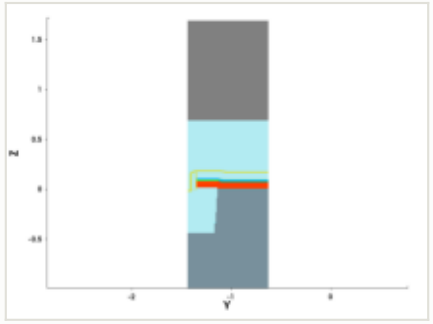

y cut at -1.035 µm

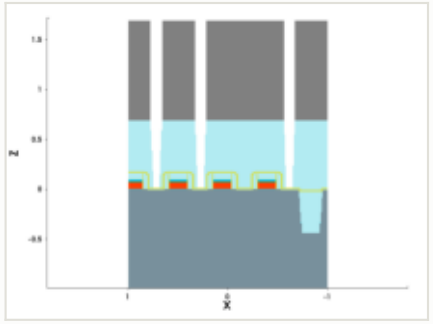

mask for this step

no mask for this step

steps by process area

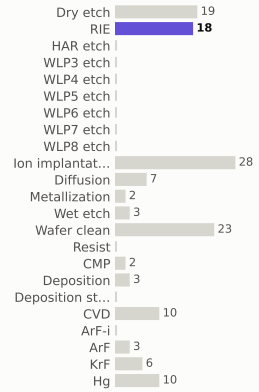

materials deposited (g)

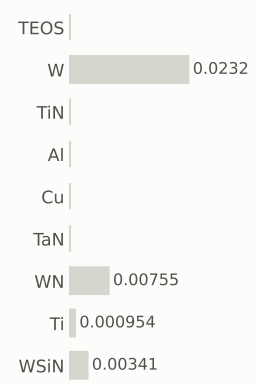

gases emitted (g)



Step #1420: RIE

etch_anisotropic · RIE

1.04	115.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

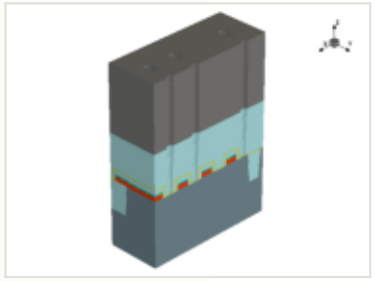

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

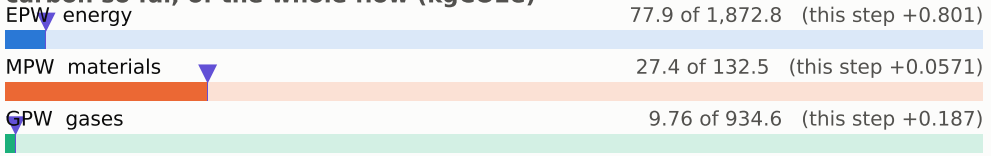

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

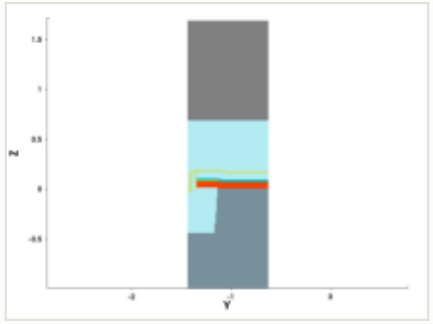

y cut at -1.035 µm

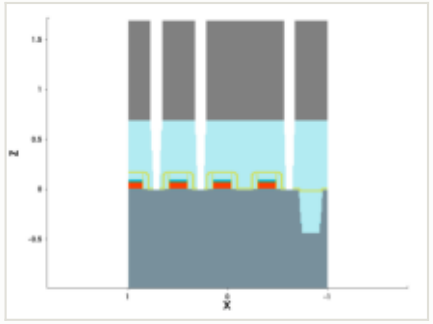

mask for this step

no mask for this step

steps by process area

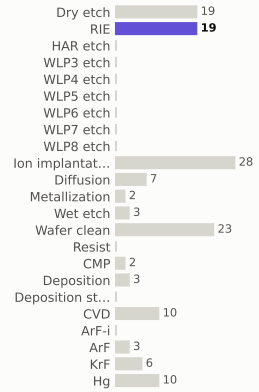

materials deposited (g)

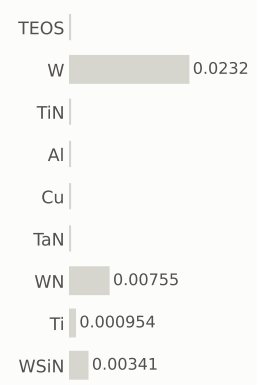

gases emitted (g)



Step #1430: RIE

etch_anisotropic · RIE

1.04	116.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

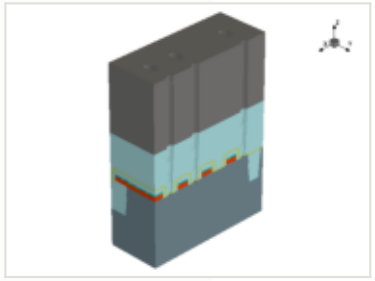

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

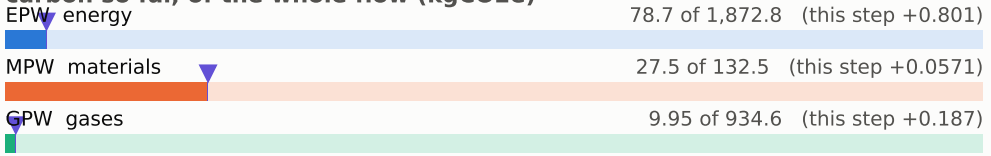

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

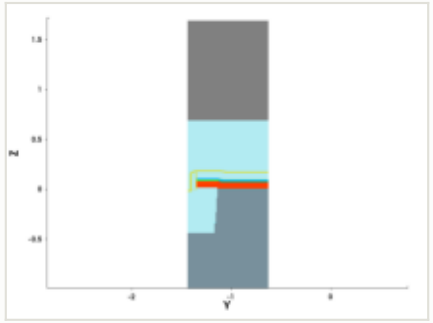

y cut at -1.035 µm

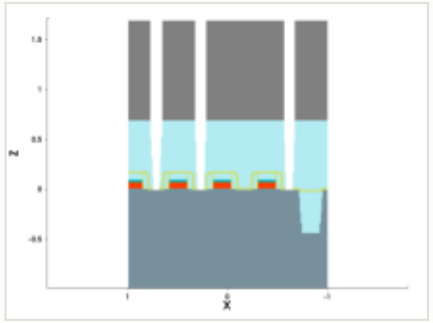

mask for this step

no mask for this step

steps by process area

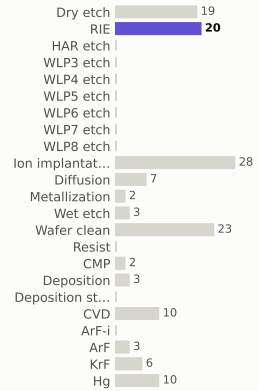

materials deposited (g)

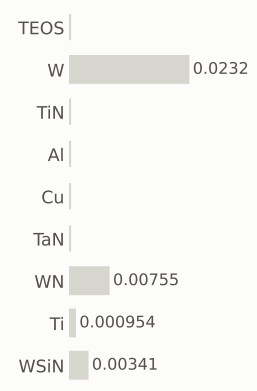

gases emitted (g)

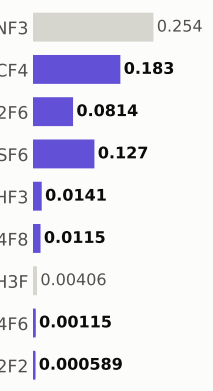

Step #1440: RIE

etch_anisotropic · RIE

1.04	117.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

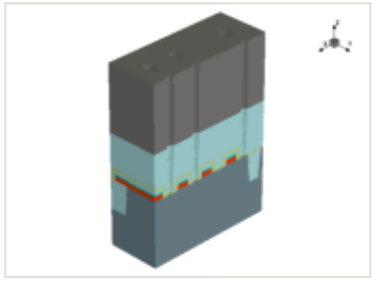

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

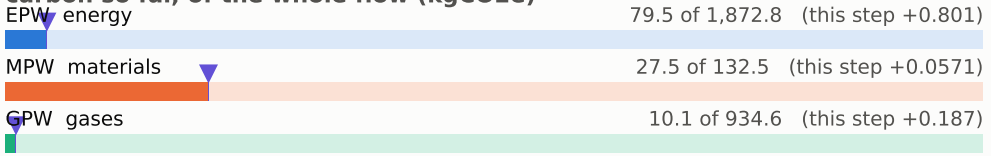

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

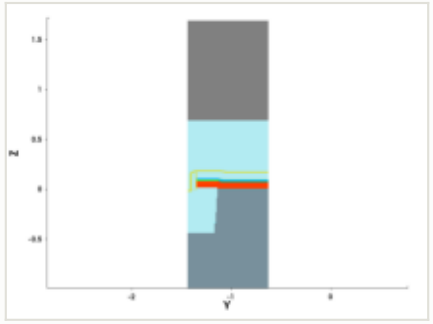

y cut at -1.035 µm

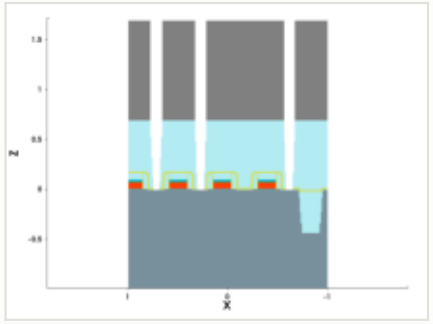

mask for this step

no mask for this step

steps by process area

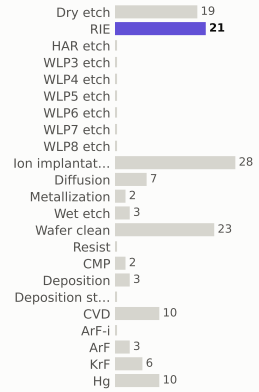

materials deposited (g)

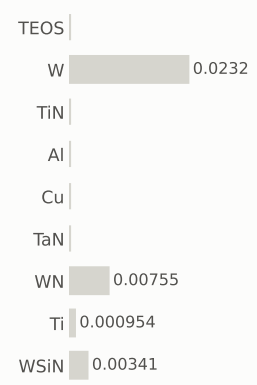

gases emitted (g)



Step #1450: Dry_etch

etch_strip · Dry_etch

0.801	117.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

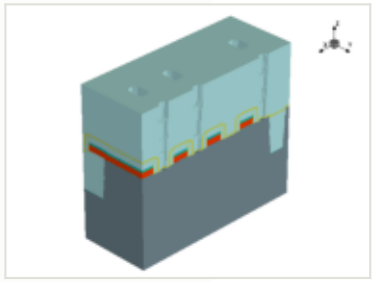

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

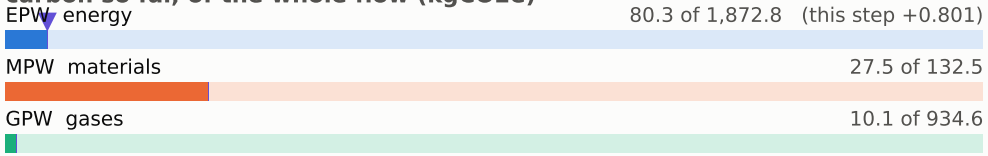

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

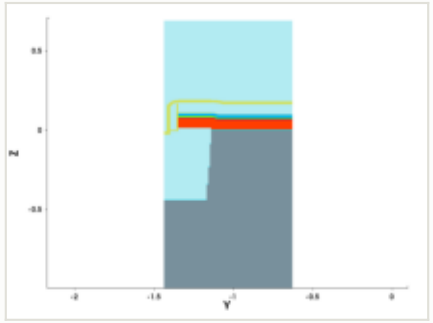

y cut at -1.035 µm

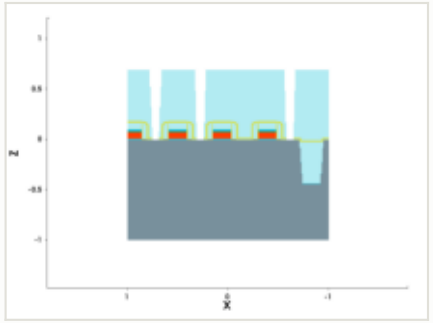

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

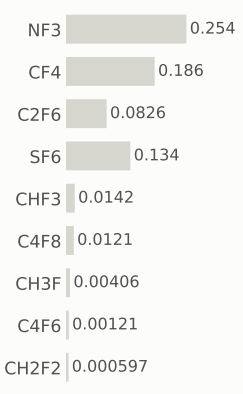

Step #1460: Wafer_clean

clean · Wafer_clean

0.169	118.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

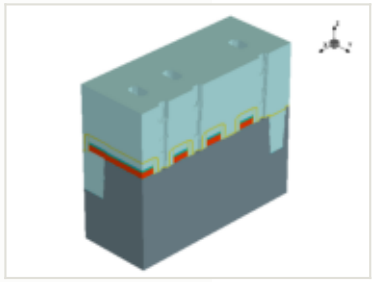

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

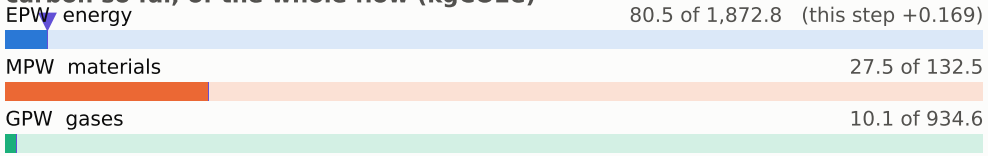

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

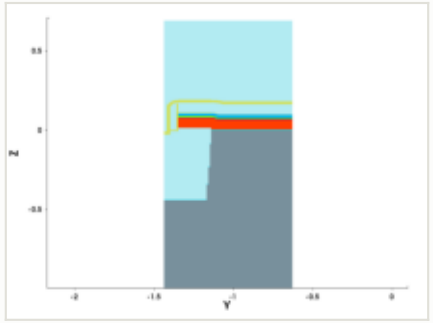

y cut at -1.035 µm

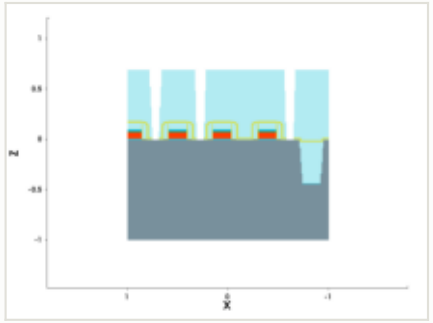

mask for this step

no mask for this step

steps by process area

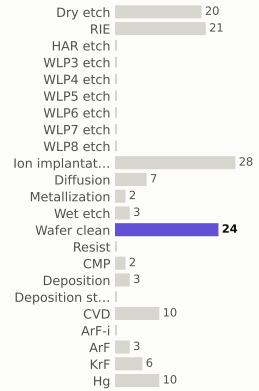

materials deposited (g)

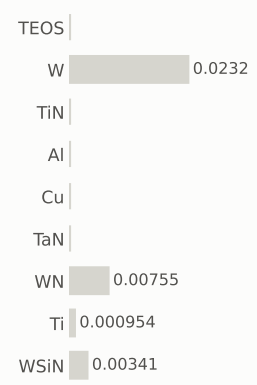

gases emitted (g)

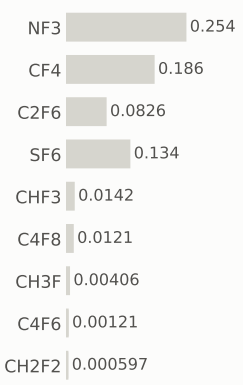

Step #1470: Diffusion

anneal · Diffusion

0.801	118.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

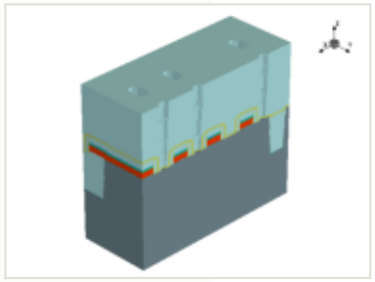

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

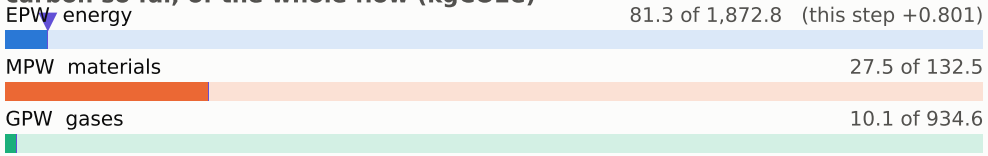

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

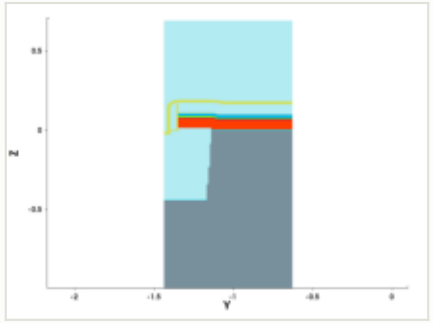

y cut at -1.035 µm

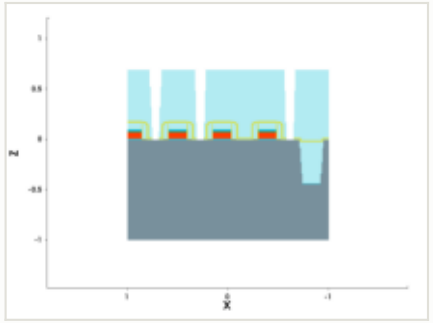

mask for this step

no mask for this step

steps by process area



materials deposited (g)

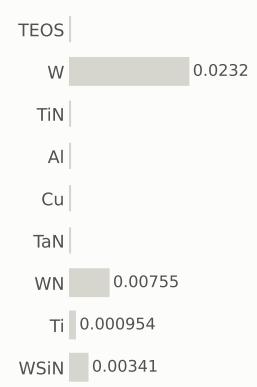

gases emitted (g)

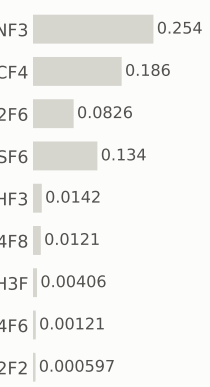

Step #1480: Diffusion

anneal · Diffusion

0.801	119.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

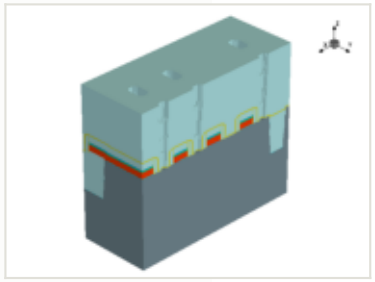

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

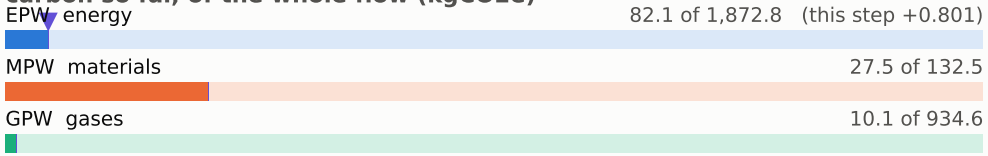

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

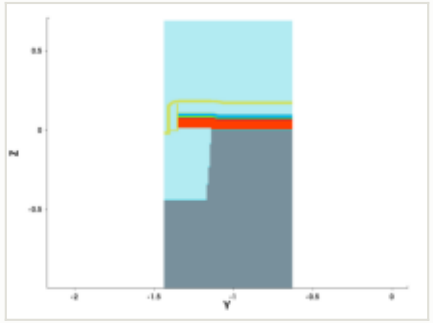

y cut at -1.035 µm

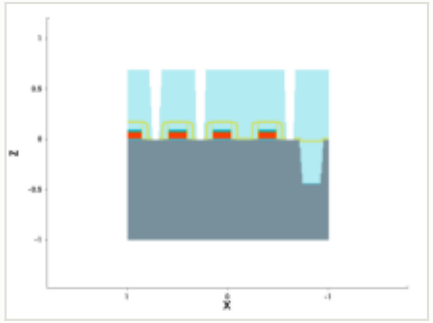

mask for this step

no mask for this step

steps by process area



materials deposited (g)

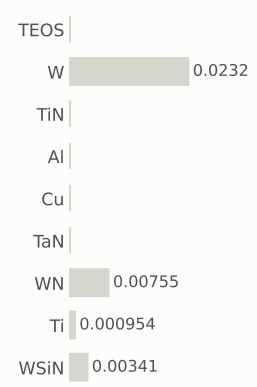

gases emitted (g)

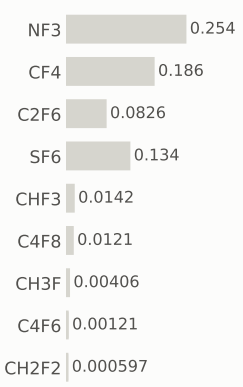

Step #1490: Wet_etch

implant_ellipsoid · Wet_etch

0.169	119.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

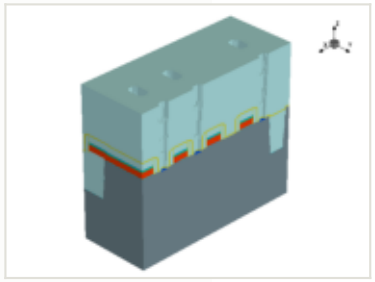

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

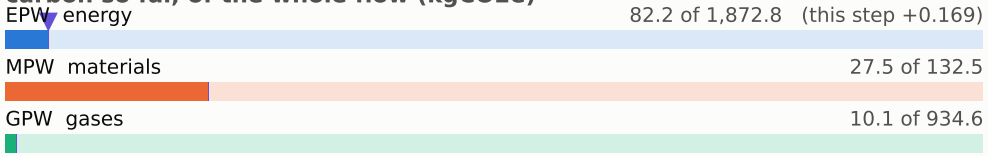

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

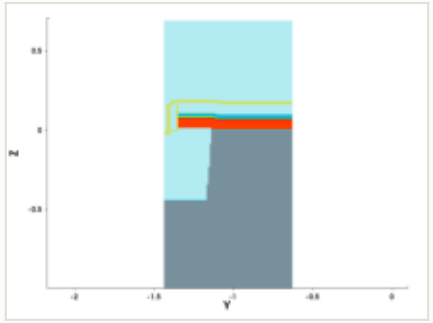

y cut at -1.035 µm

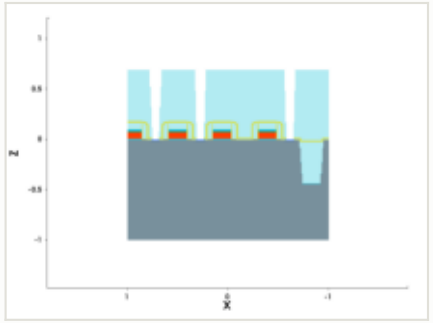

mask for this step

no mask for this step

steps by process area

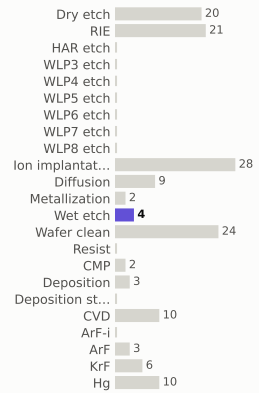

materials deposited (g)

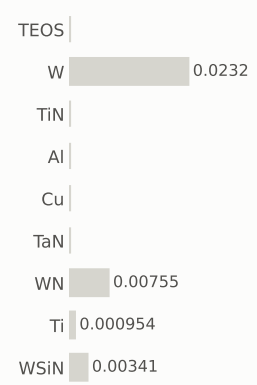

gases emitted (g)



Step #1500: Wafer_clean

clean · Wafer_clean

0.169	120.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

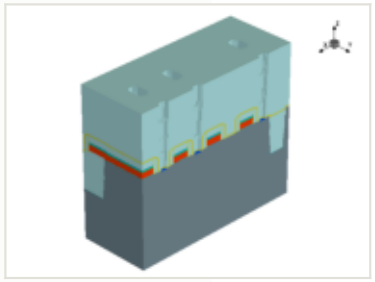

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

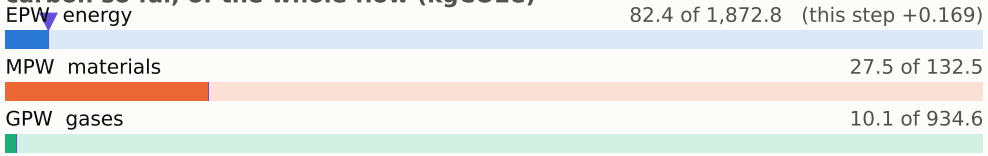

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

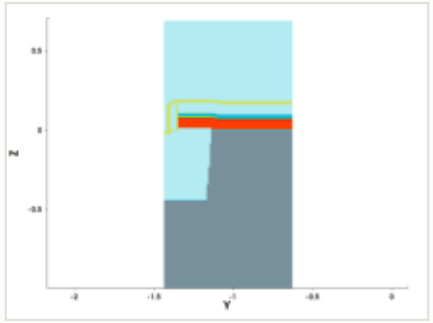

y cut at -1.035 µm

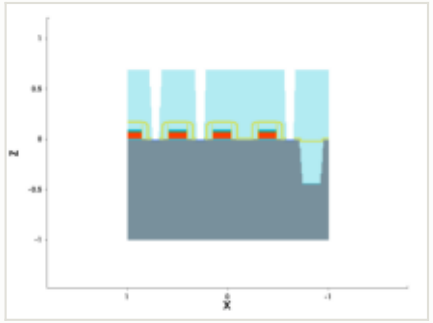

mask for this step

no mask for this step

steps by process area



materials deposited (g)

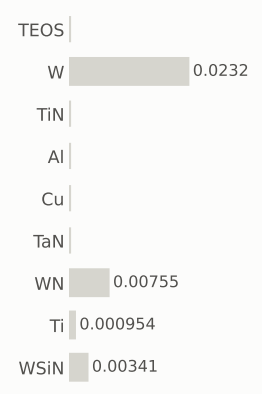

gases emitted (g)



Step #1510: CVD

depo_isotropic · CVD

1.31	121.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

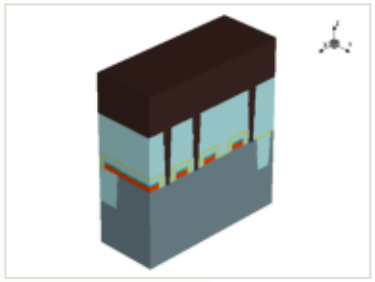

this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

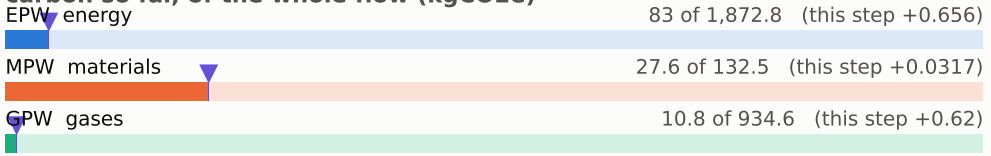

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

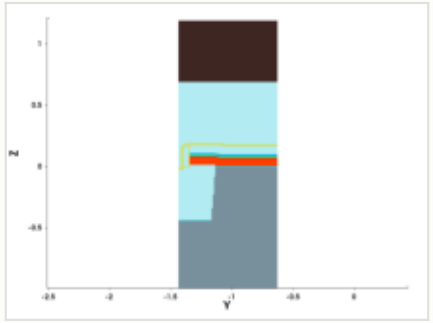

y cut at -1.035 µm

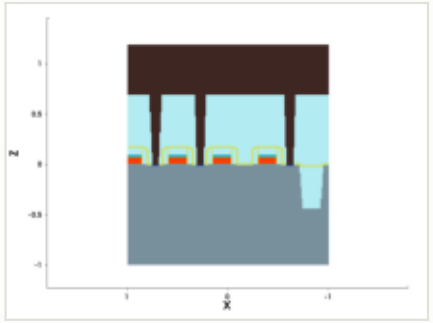

mask for this step

no mask for this step

steps by process area

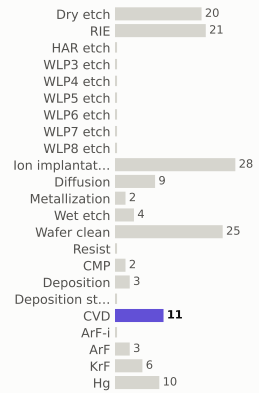

materials deposited (g)

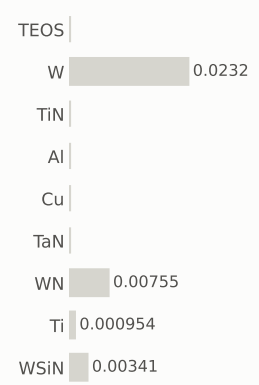

gases emitted (g)

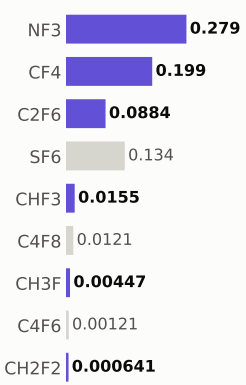

Step #1520: CVD

depo_isotropic · CVD

1.31	122.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

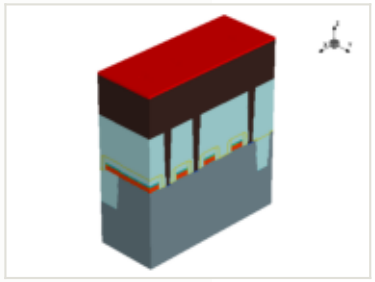

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

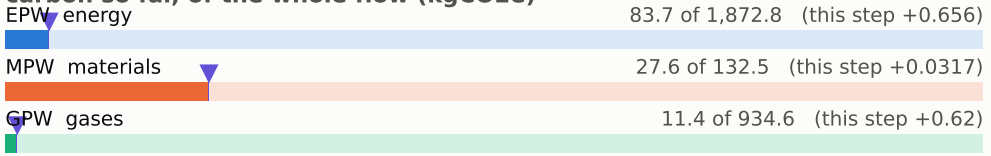

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

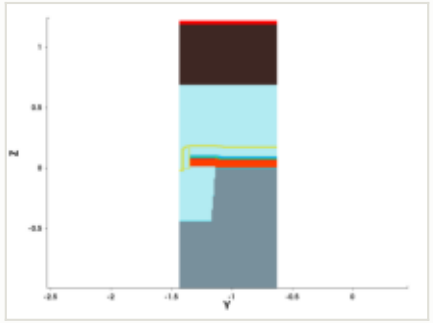

y cut at -1.035 µm

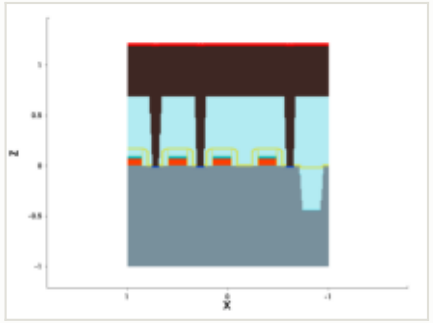

mask for this step

no mask for this step

steps by process area

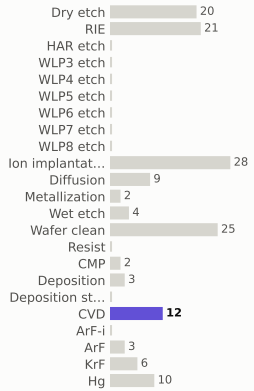

materials deposited (g)

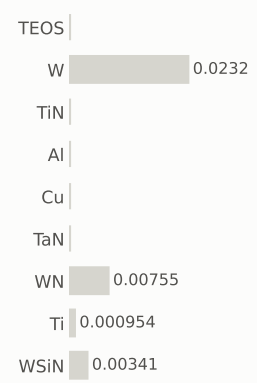

gases emitted (g)

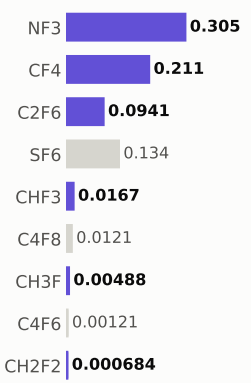

Step #1530: Wafer_clean

clean · Wafer_clean

0.169	122.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

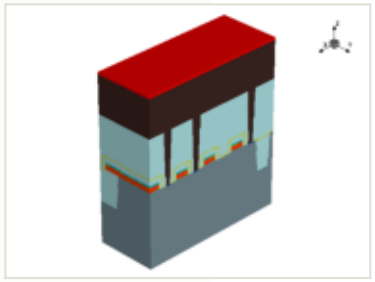

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

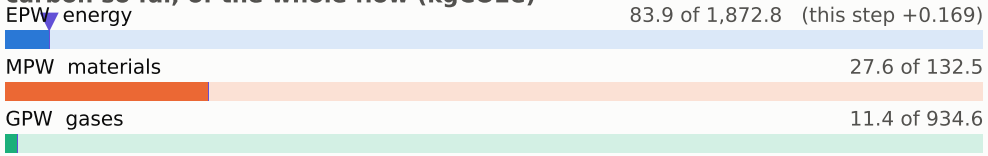

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

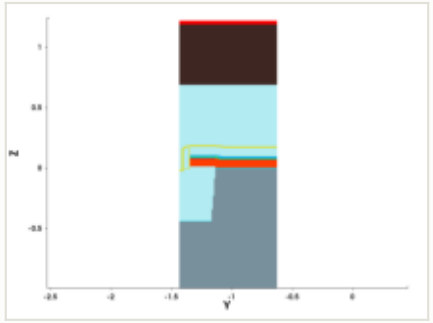

y cut at -1.035 µm

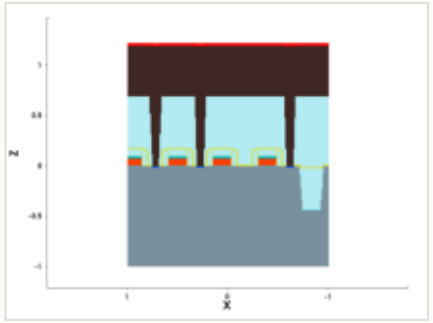

mask for this step

no mask for this step

steps by process area

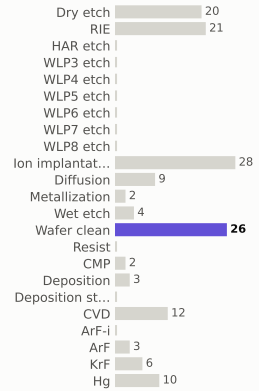

materials deposited (g)

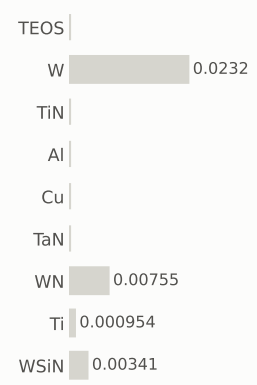

gases emitted (g)

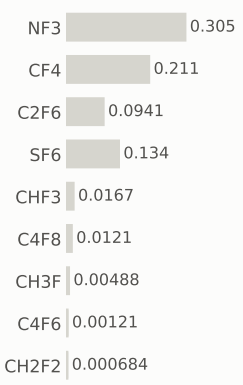

Step #1540: ArF-i

litho_patterning · ArF-i

0.217	123.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

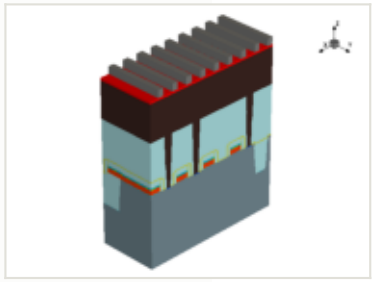

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

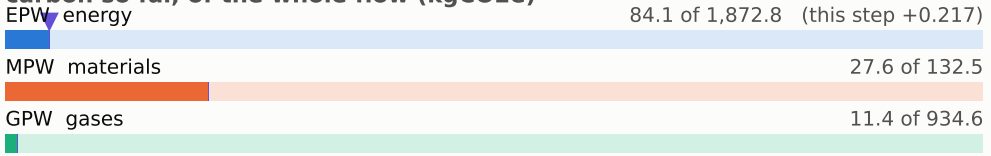

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

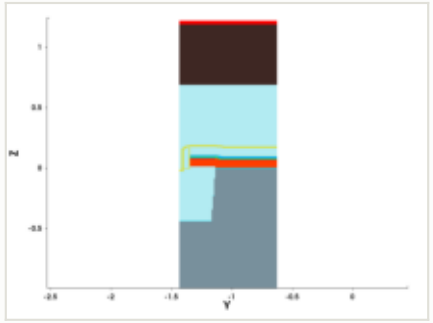

y cut at -1.035 µm

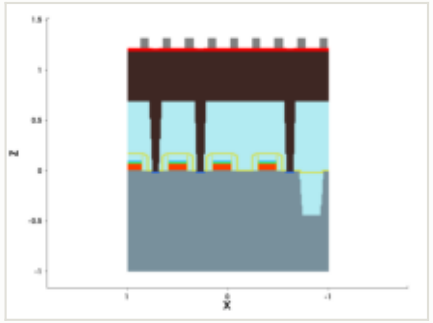

mask: layer 20:0 (OASIS)

steps by process area

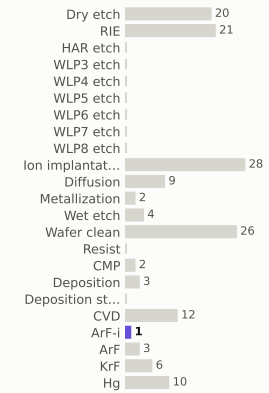

materials deposited (g)



gases emitted (g)

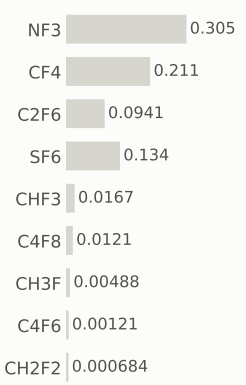

Step #1550: RIE

etch_anisotropic · RIE

1.04	124.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

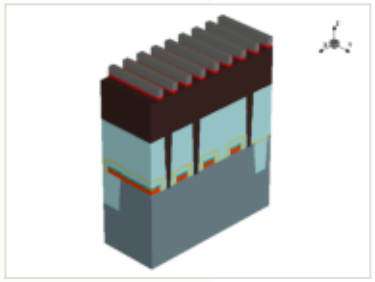

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

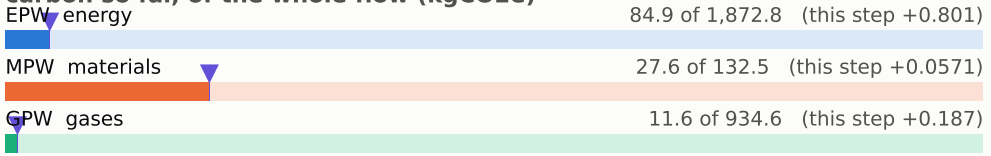

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

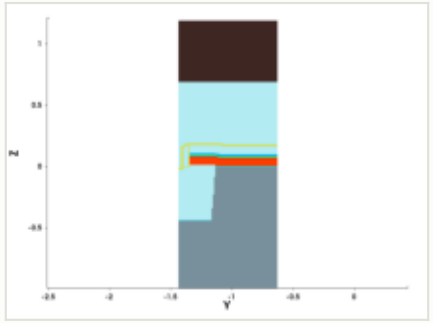

y cut at -1.035 µm

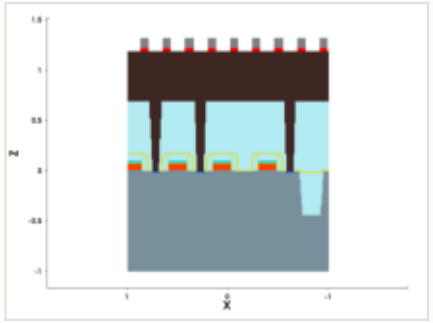

mask for this step

no mask for this step

steps by process area

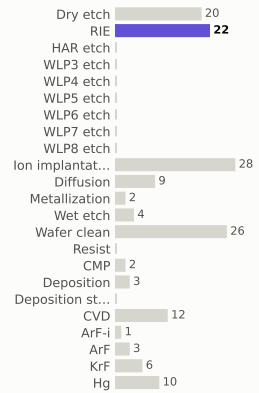

materials deposited (g)

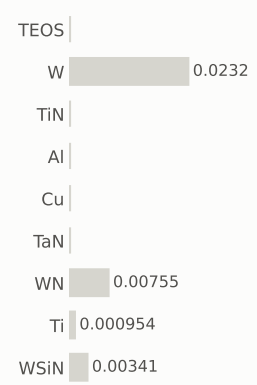

gases emitted (g)



Step #1560: RIE

etch_anisotropic · RIE

1.04	125.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

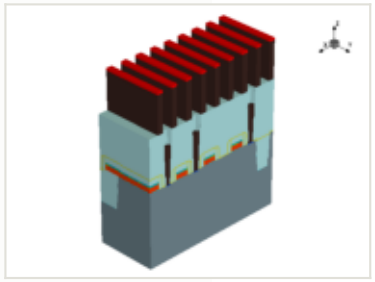

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

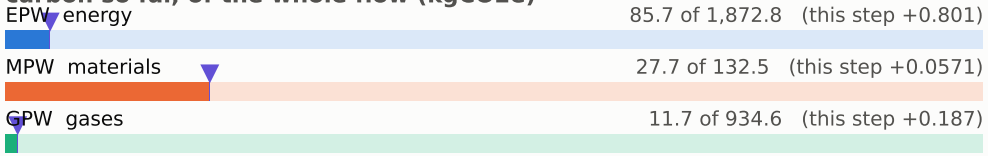

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

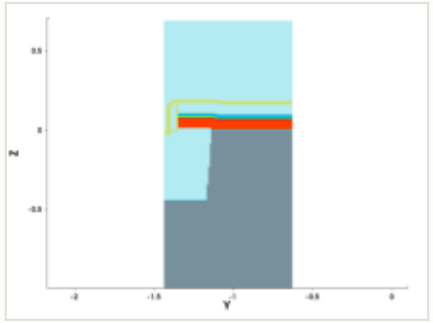

y cut at -1.035 µm

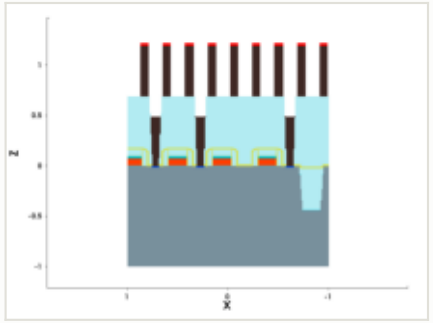

mask for this step

no mask for this step

steps by process area

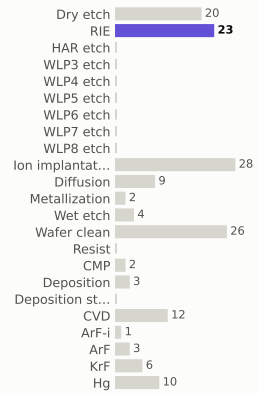

materials deposited (g)

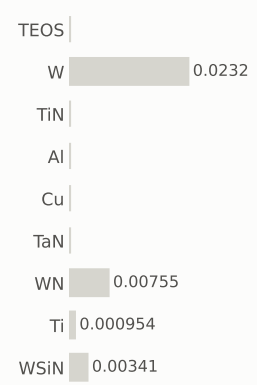

gases emitted (g)

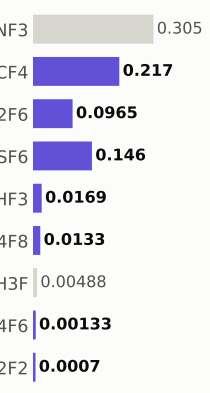

Step #1570: RIE

etch_anisotropic · RIE

1.04	126.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

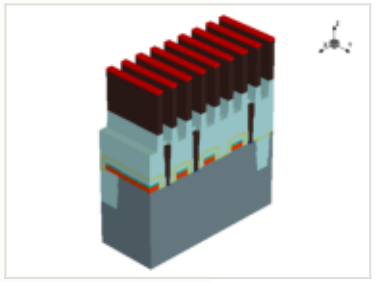

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

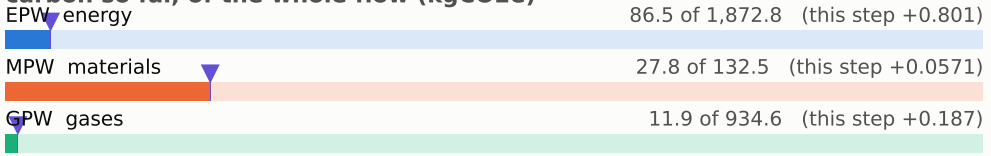

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

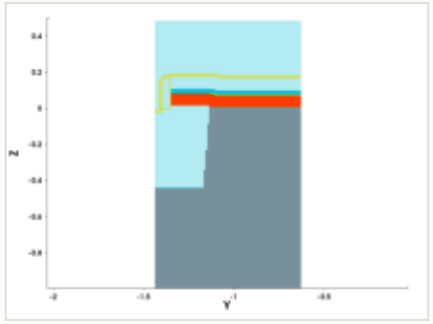

y cut at -1.035 µm

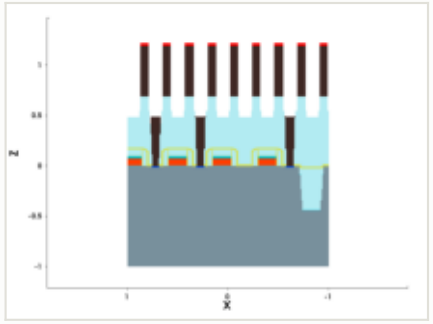

mask for this step

no mask for this step

steps by process area



materials deposited (g)

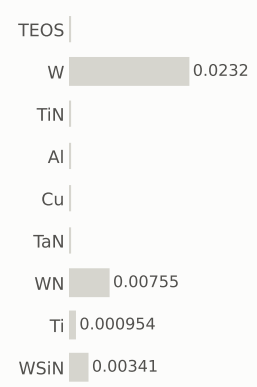

gases emitted (g)



Step #1580: RIE

etch_isotropic · RIE

1.04	127.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

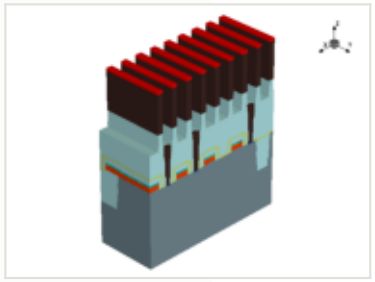

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

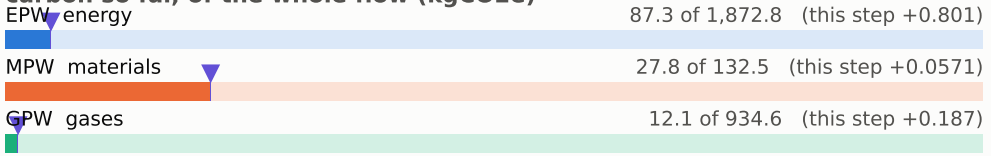

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

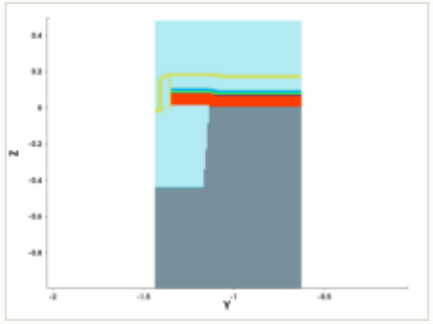

y cut at -1.035 µm

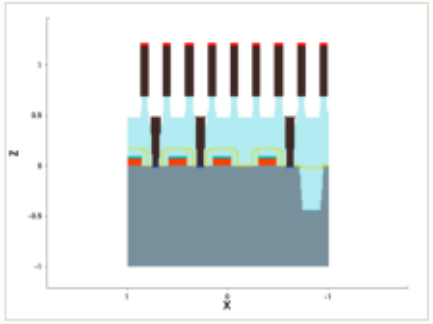

mask for this step

no mask for this step

steps by process area



materials deposited (g)

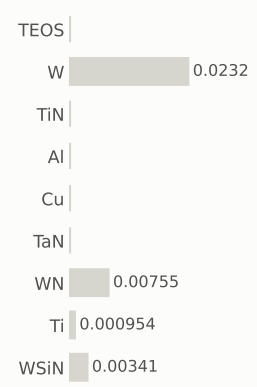

gases emitted (g)



Step #1590: Dry_etch

etch_strip · Dry_etch

0.801	128.0	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

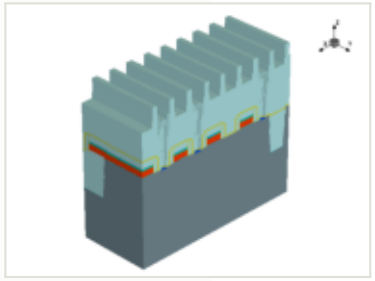

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

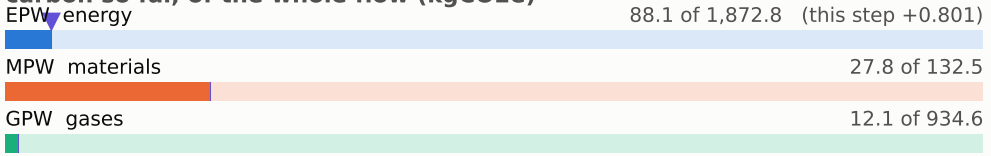

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

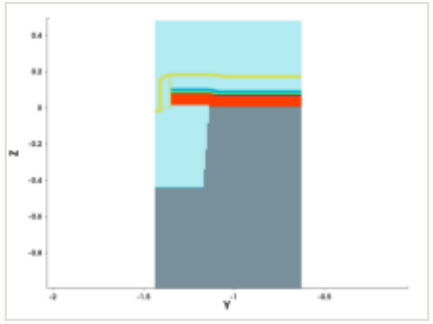

y cut at -1.035 µm

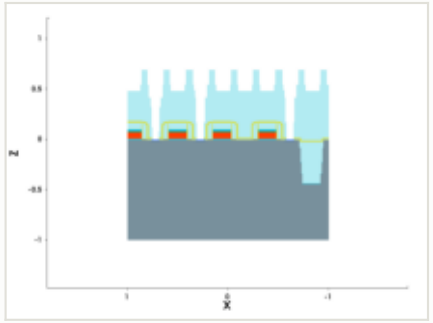

mask for this step

no mask for this step

steps by process area

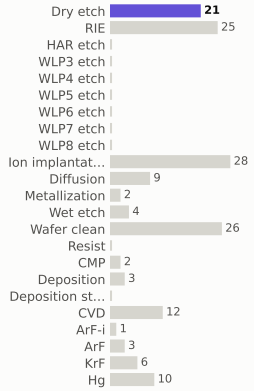

materials deposited (g)



gases emitted (g)

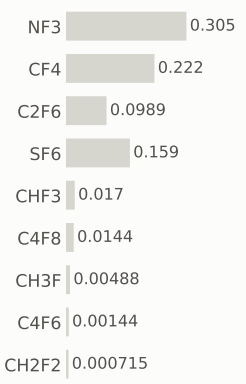

Step #1600: Wafer_clean

clean · Wafer_clean

0.169	128.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

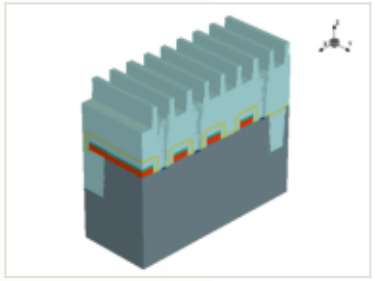

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

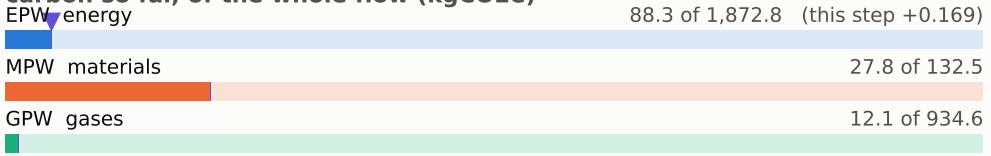

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

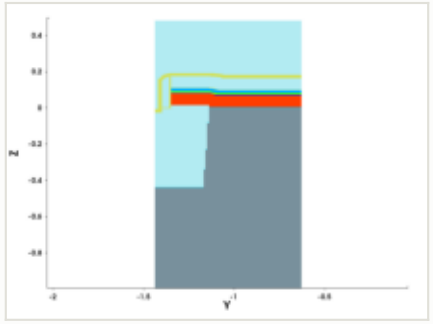

y cut at -1.035 µm

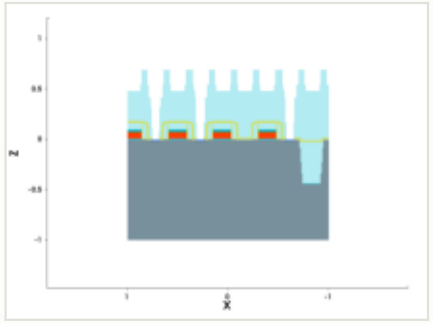

mask for this step

no mask for this step

steps by process area



materials deposited (g)

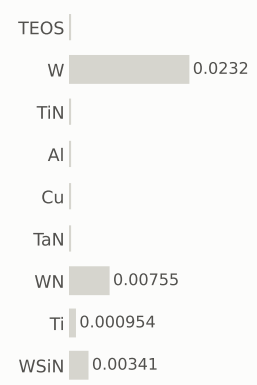

gases emitted (g)

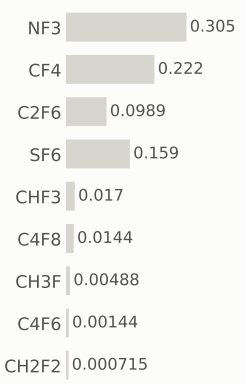

Step #1610: CVD

depo_isotropic · CVD

1.31	129.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

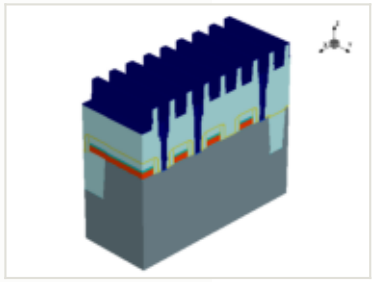

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0319 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

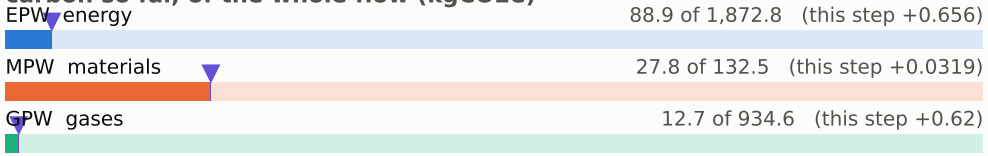

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

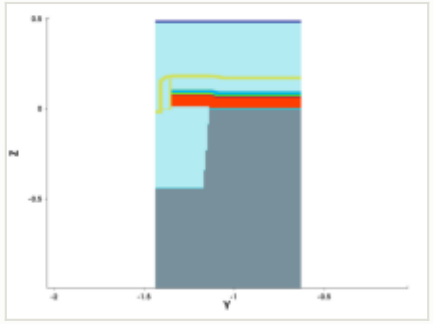

y cut at -1.035 µm

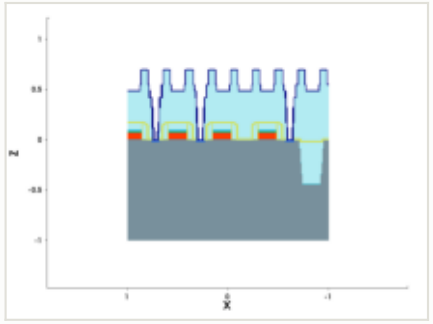

mask for this step

no mask for this step

steps by process area

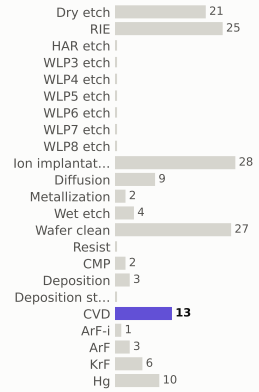

materials deposited (g)



gases emitted (g)

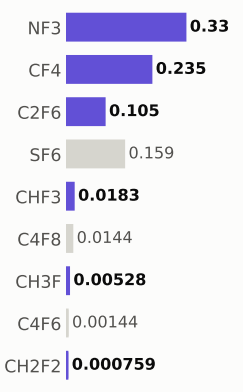

Step #1620: Metallization

depo_isotropic · Metallization

1.22	130.7	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

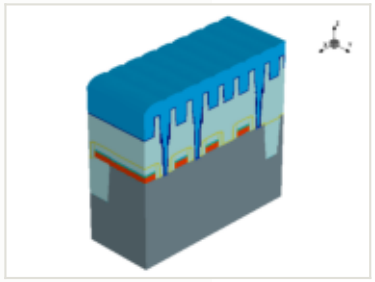

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

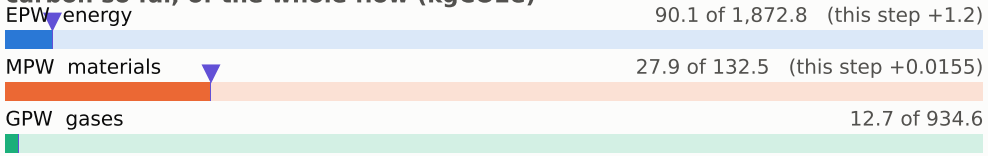

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

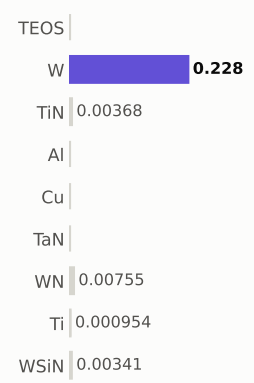

gases emitted (g)

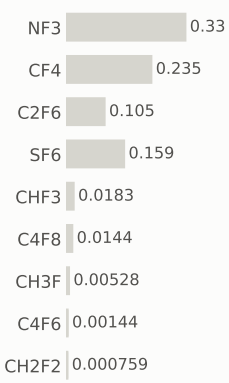

x cut at 0.000 µm

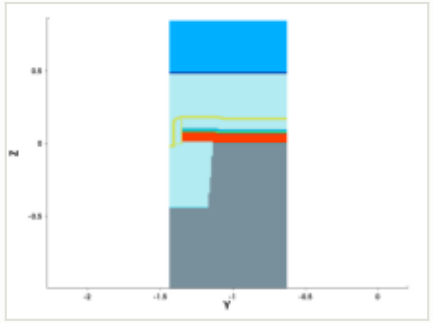

y cut at -1.035 µm

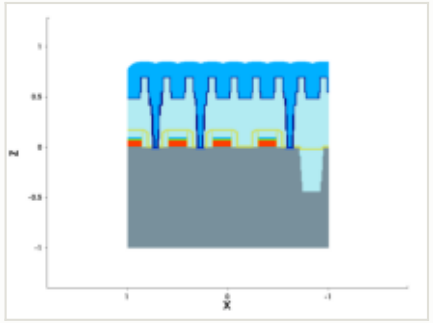

mask for this step

no mask for this step

Step #1630: CMP

etch_cmp · CMP

0.169	130.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

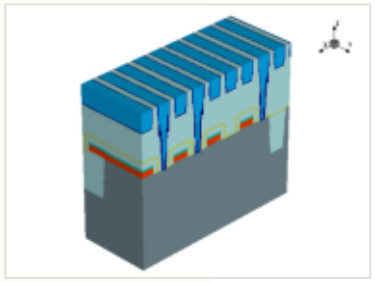

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

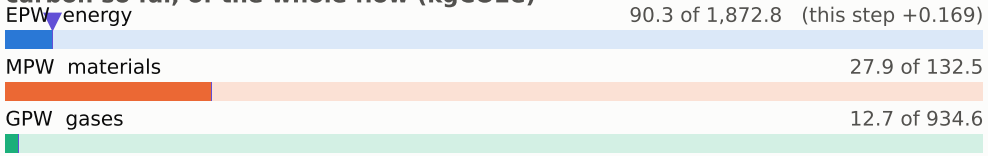

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

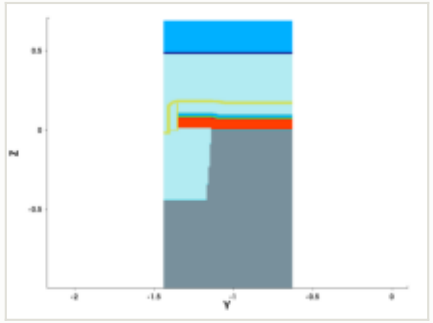

y cut at -1.035 µm

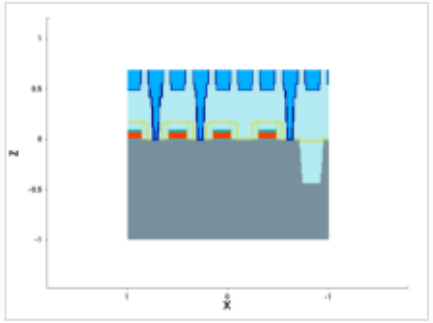

mask for this step

no mask for this step

steps by process area

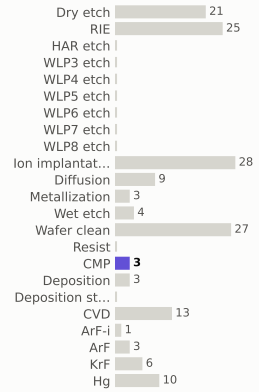

materials deposited (g)



gases emitted (g)

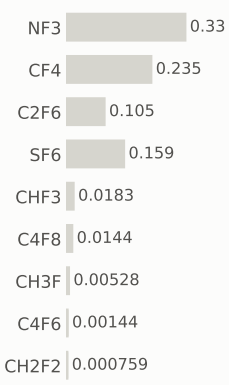

Step #1640: Wafer_clean

clean · Wafer_clean

0.169	131.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

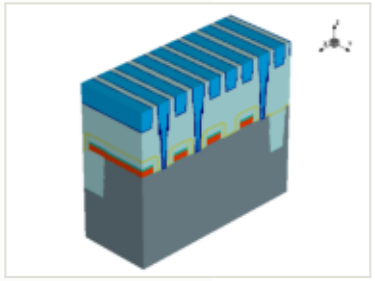

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

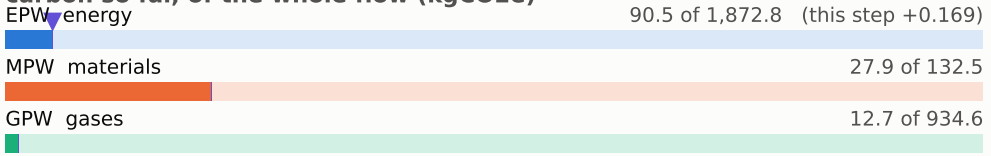

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

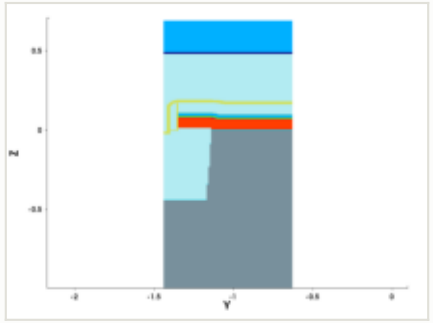

y cut at -1.035 µm

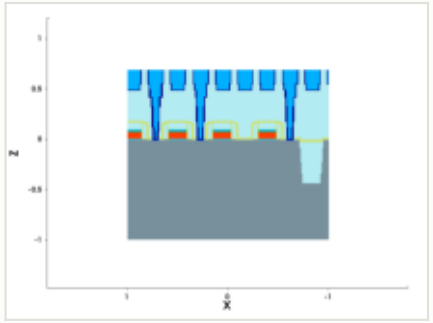

mask for this step

no mask for this step

steps by process area

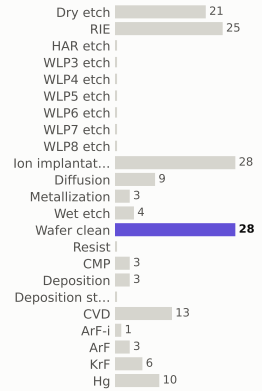

materials deposited (g)

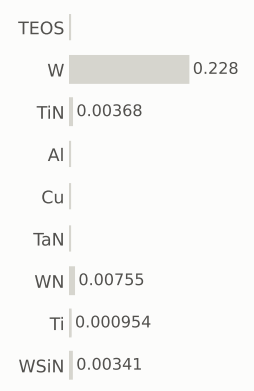

gases emitted (g)

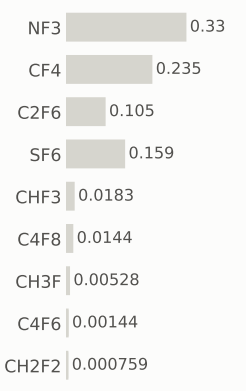

Step #1660: CVD

depo_isotropic · CVD

1.31	132.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

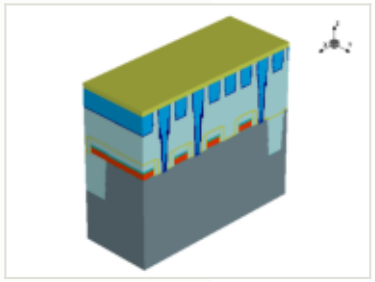

this step

process area	CVD
material	—
thickness	0.053 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

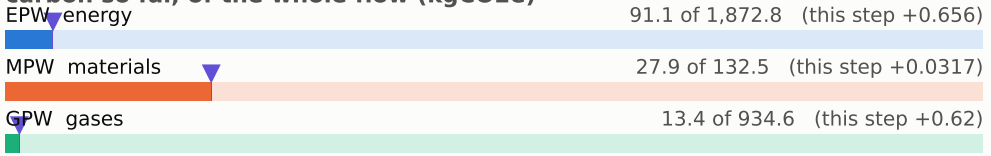

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

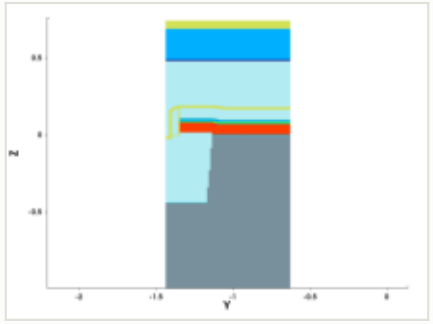

y cut at -1.035 µm

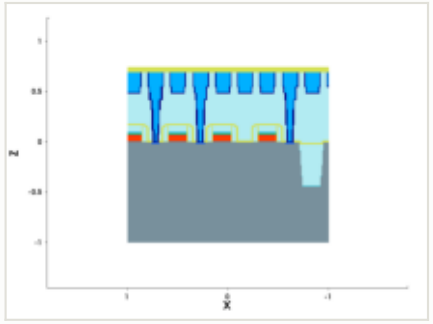

mask for this step

no mask for this step

steps by process area

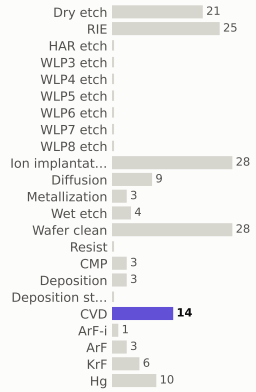

materials deposited (g)



gases emitted (g)



Step #1670: CVD

depo_isotropic · CVD

1.31	133.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

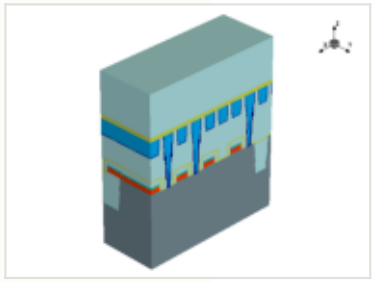

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.56 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

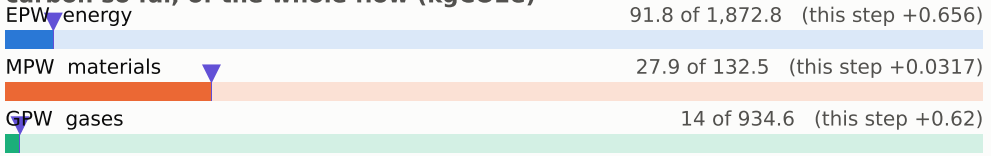

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

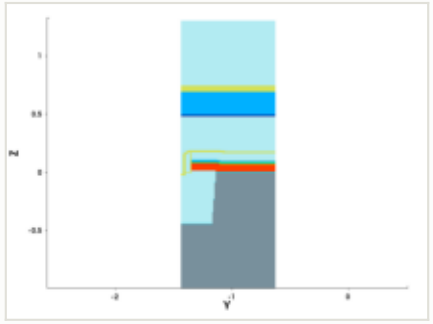

y cut at -1.035 µm

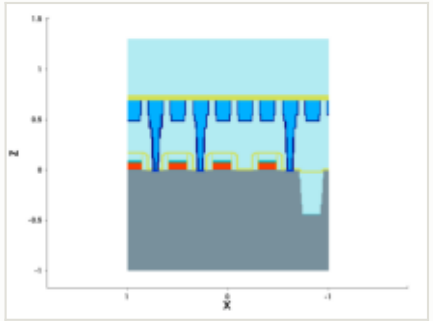

mask for this step

no mask for this step

steps by process area

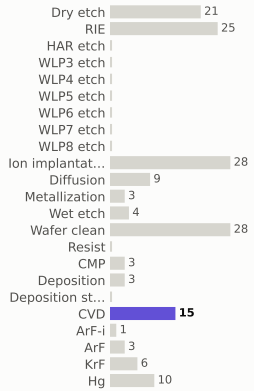

materials deposited (g)

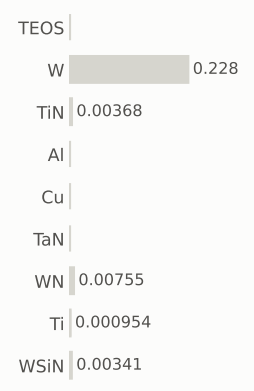

gases emitted (g)

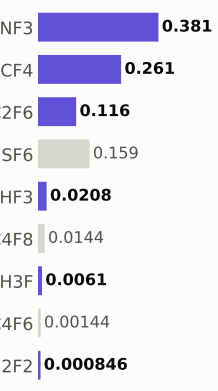

Step #1680: ArF

litho_patterning · ArF

0.199	133.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

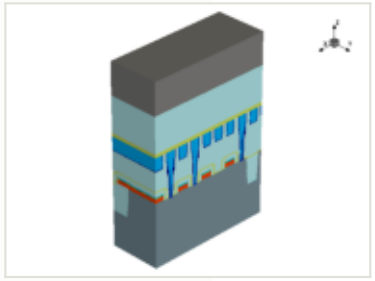

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

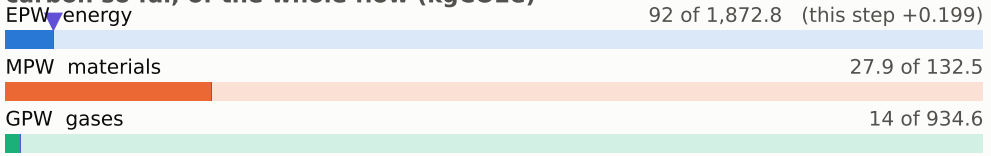

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

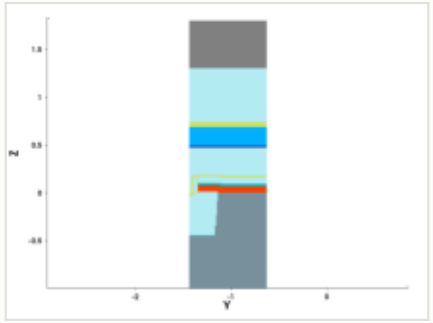

y cut at -1.035 µm

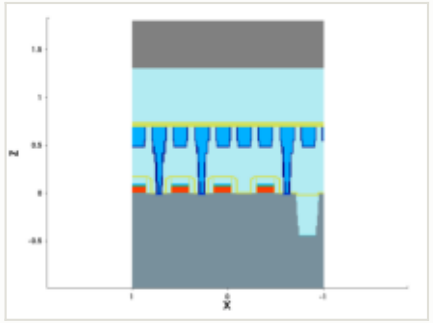

mask: layer 21:0, positive (OASIS)

steps by process area

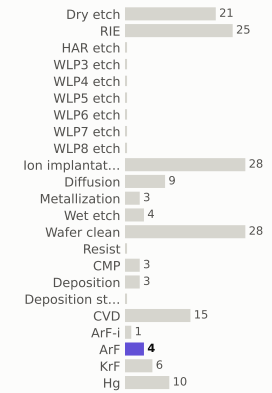

materials deposited (g)

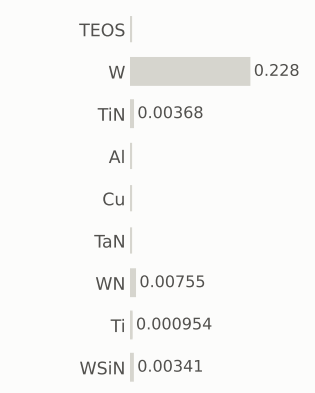

gases emitted (g)

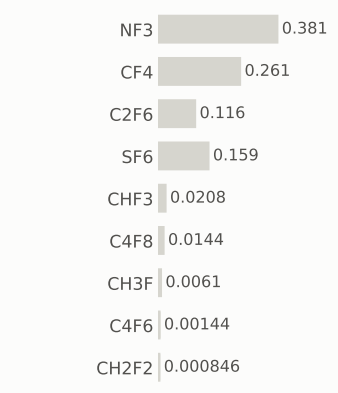

Step #1690: RIE

etch_anisotropic · RIE

1.04	134.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

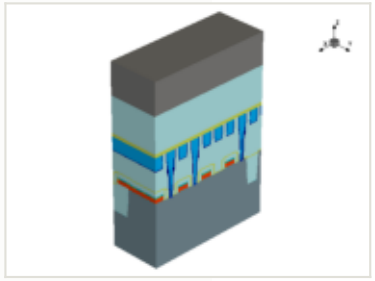

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

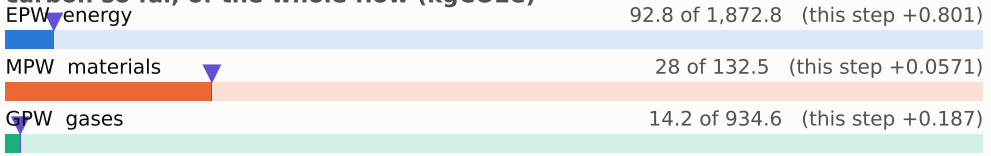

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

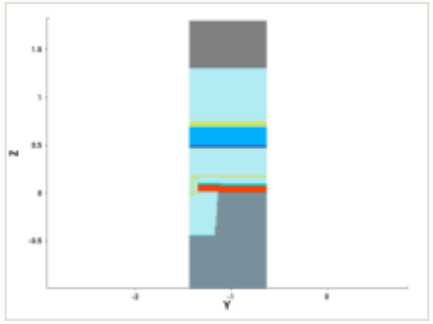

y cut at -1.035 µm

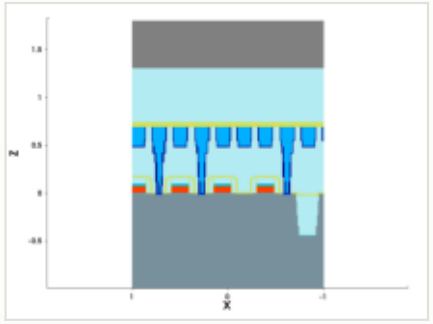

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #1700: Dry_etch

etch_strip · Dry_etch

0.801	135.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

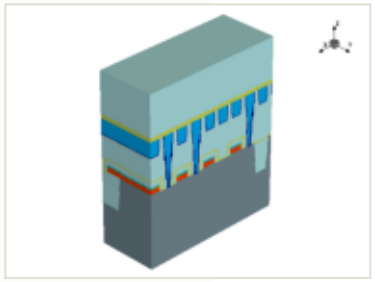

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

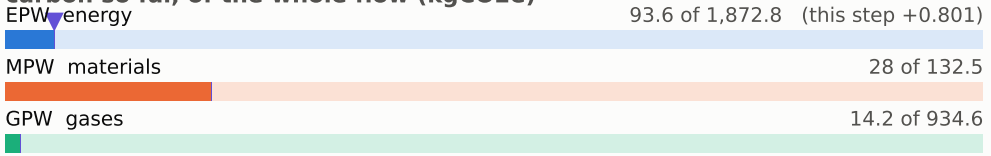

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

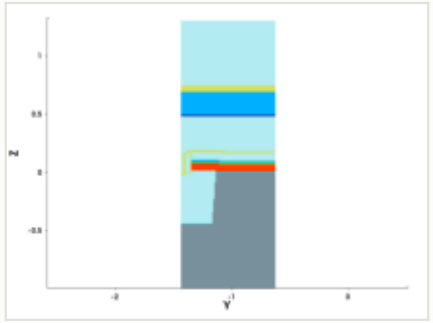

y cut at -1.035 µm

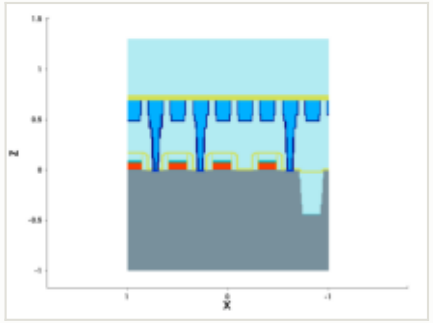

mask for this step

no mask for this step

steps by process area

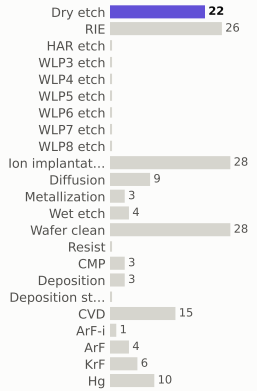

materials deposited (g)

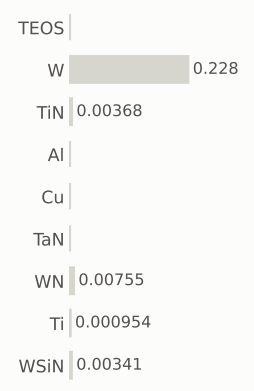

gases emitted (g)

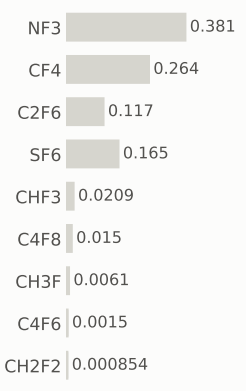

Step #1710: Wafer_clean

clean · Wafer_clean

0.169	135.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

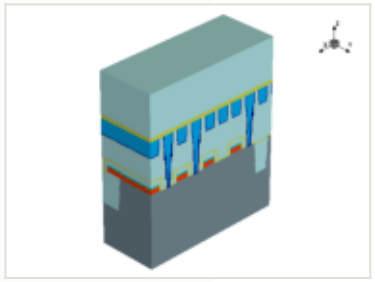

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

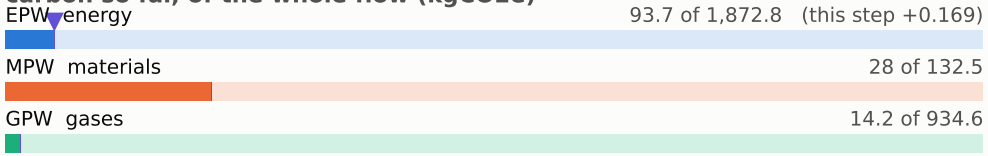

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

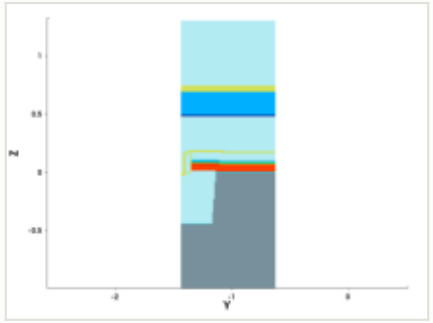

y cut at -1.035 µm

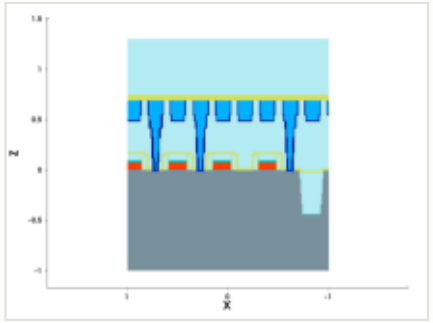

mask for this step

no mask for this step

steps by process area

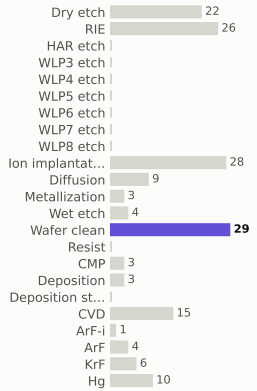

materials deposited (g)

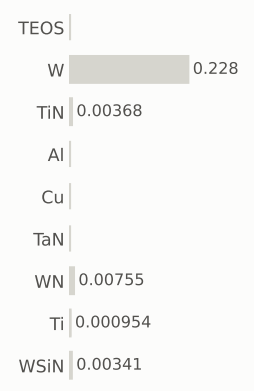

gases emitted (g)

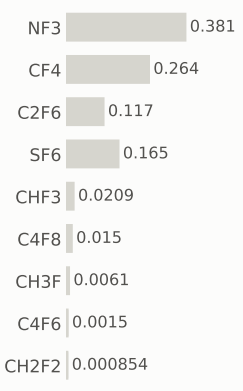

Step #1720: KrF

litho_patterning · KrF

0.199	136.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

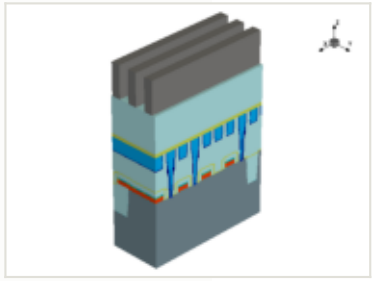

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

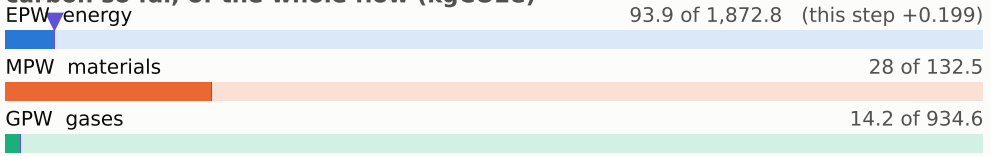

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

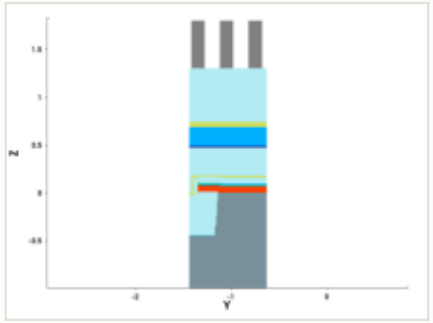

y cut at -1.035 µm

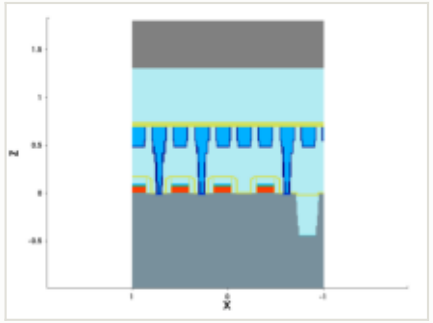

mask: layer 22:0 (OASIS)



steps by process area

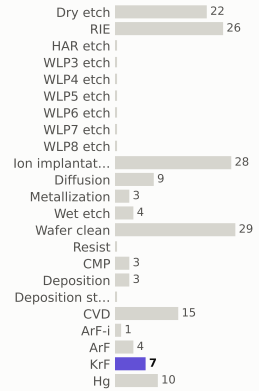

materials deposited (g)



gases emitted (g)

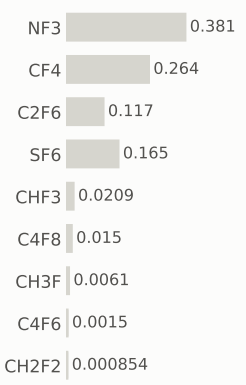

Step #1730: RIE

etch_anisotropic · RIE

1.04	137.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

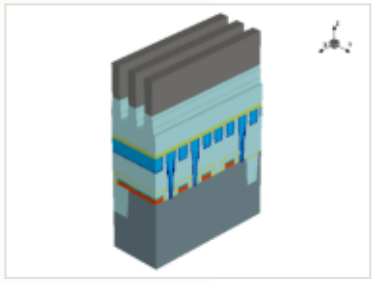

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

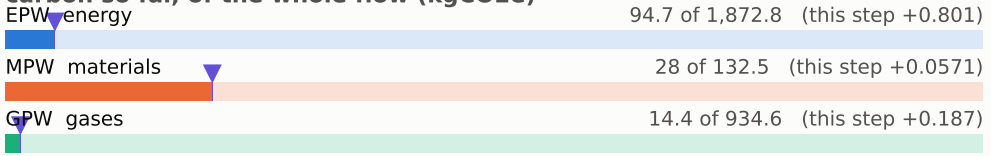

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

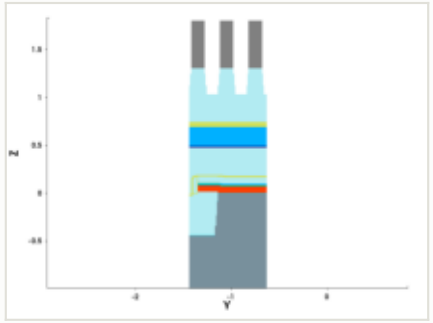

y cut at -1.035 µm

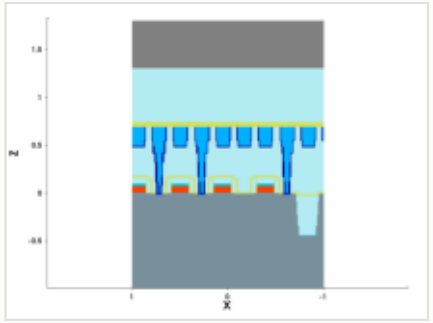

mask for this step

no mask for this step

steps by process area



materials deposited (g)

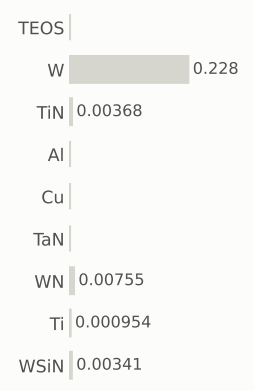

gases emitted (g)

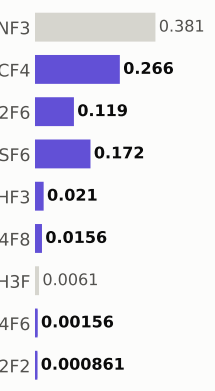

Step #1740: RIE

etch_anisotropic · RIE

1.04	138.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

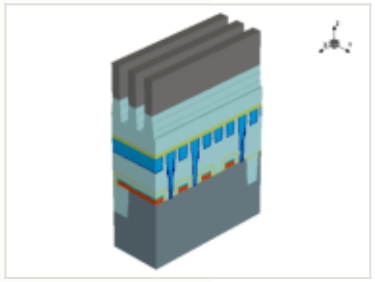

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

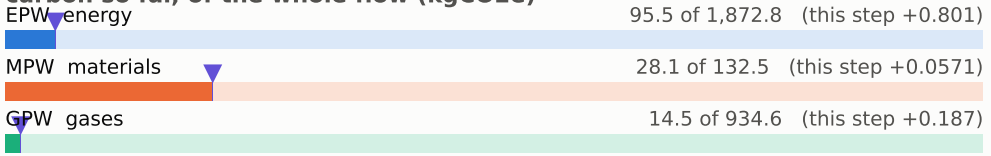

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

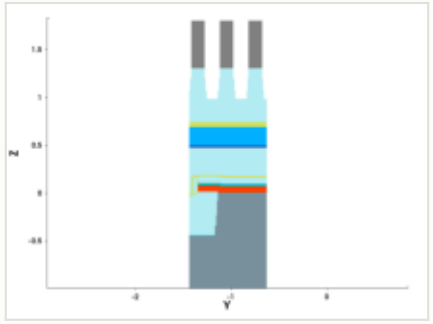

y cut at -1.035 µm

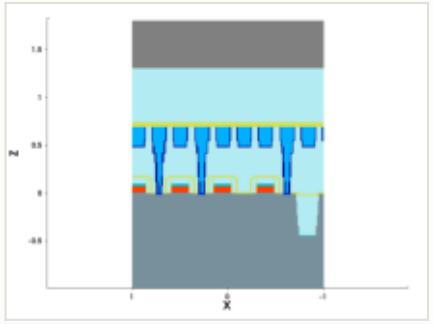

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #1750: Dry_etch

etch_strip · Dry_etch

0.801	139.0	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

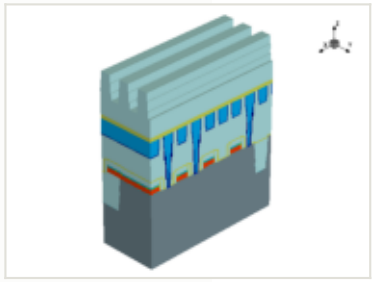

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

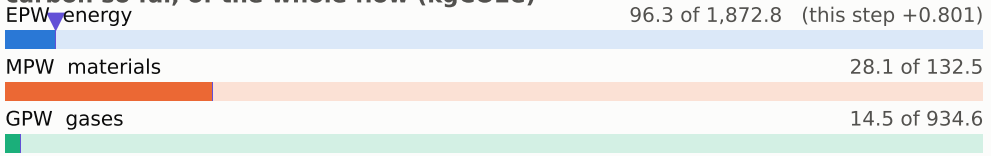

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

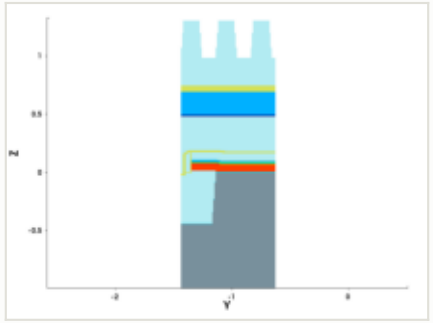

y cut at -1.035 µm

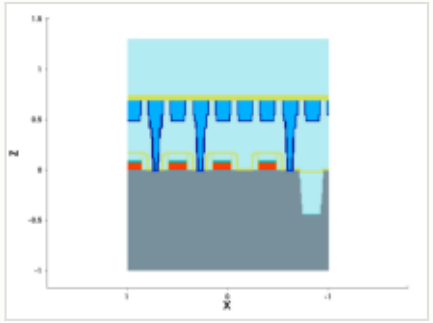

mask for this step

no mask for this step

steps by process area

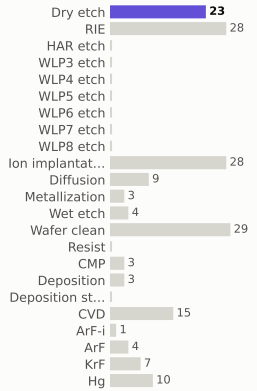

materials deposited (g)

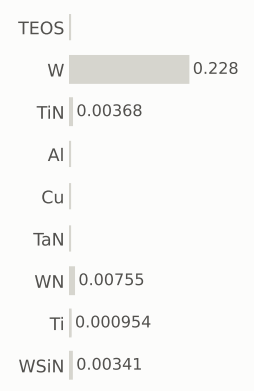

gases emitted (g)

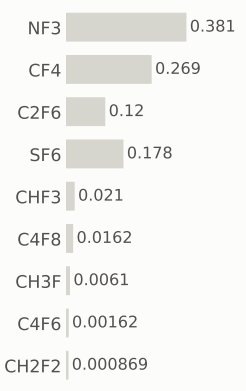

Step #1760: Wafer_clean

clean · Wafer_clean

0.169	139.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

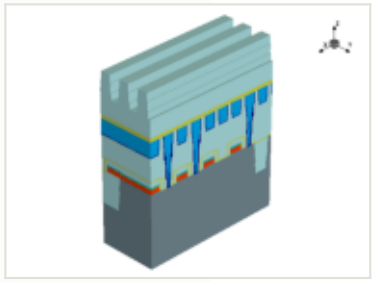

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

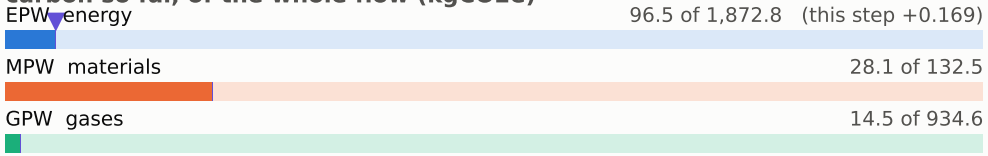

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

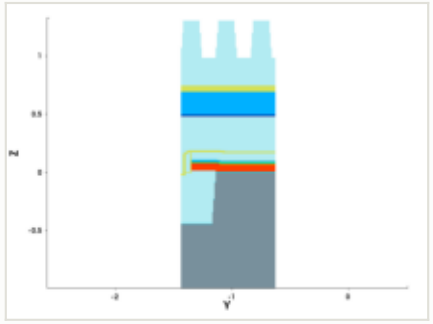

y cut at -1.035 µm

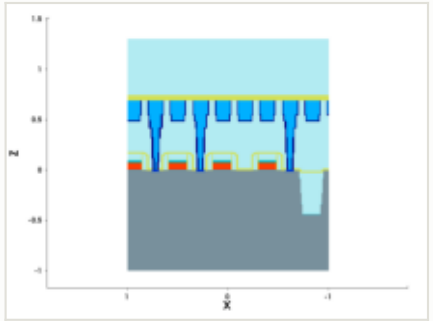

mask for this step

no mask for this step

steps by process area

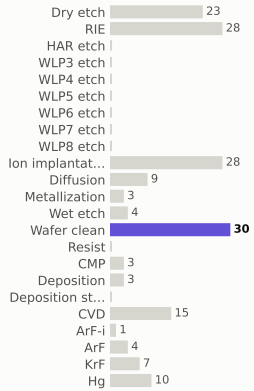

materials deposited (g)

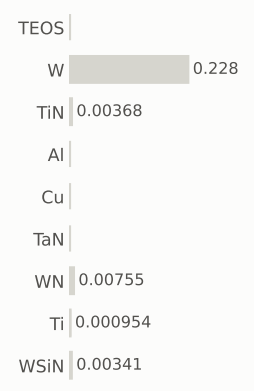

gases emitted (g)

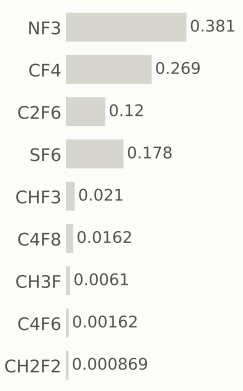

Step #1770: CVD

depo_isotropic · CVD

1.31	140.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

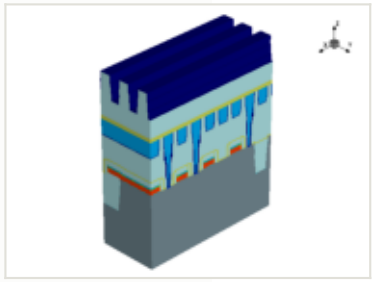

this step

process area	CVD
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

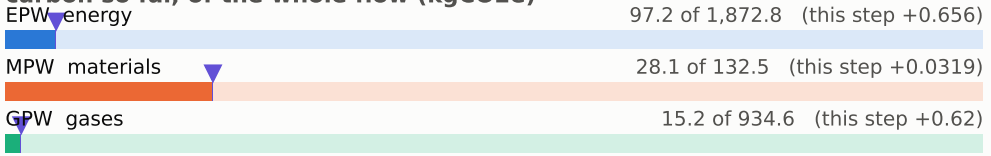

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

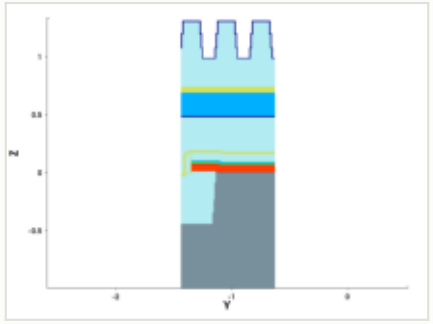

y cut at -1.035 µm

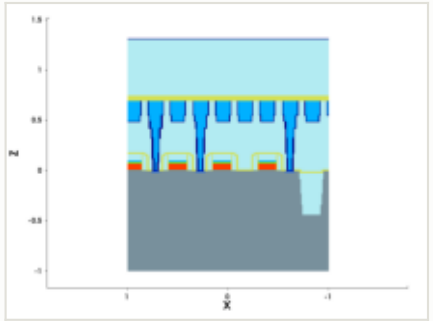

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #1780: Metallization

depo_isotropic · Metallization

1.24	141.7	0.042%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

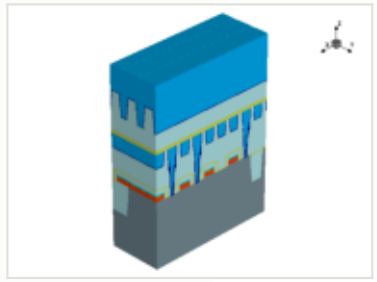

this step

process area	Metallization
material	W
thickness	0.35 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0362 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.24 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

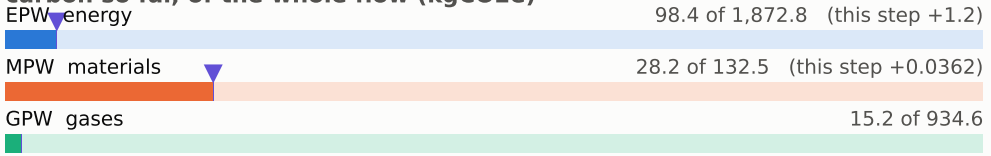

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

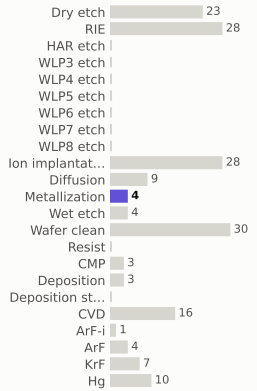

materials deposited (g)

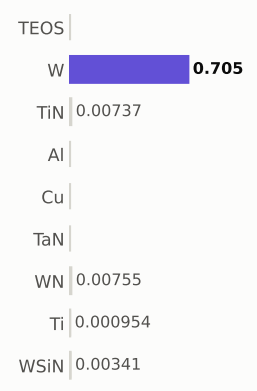

gases emitted (g)

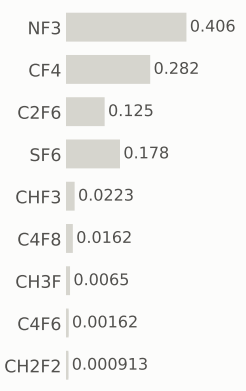

x cut at 0.000 µm

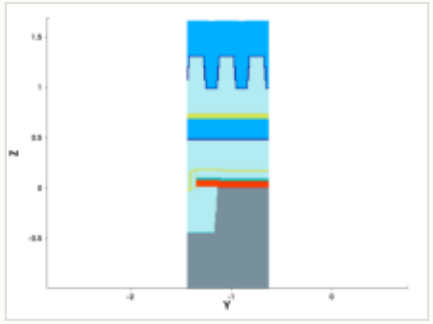

y cut at -1.035 µm

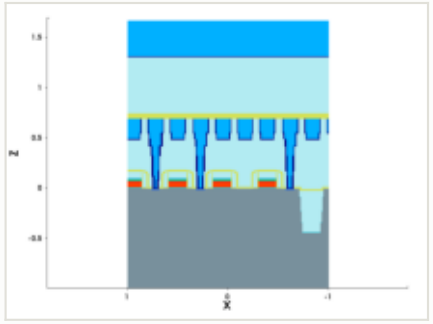

mask for this step

no mask for this step

Step #1790: CMP

etch_cmp · CMP

0.169	141.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

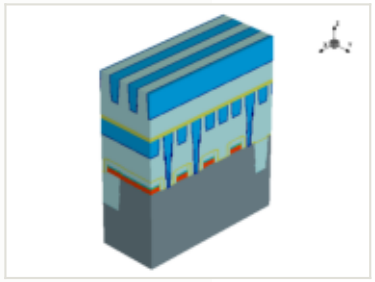

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

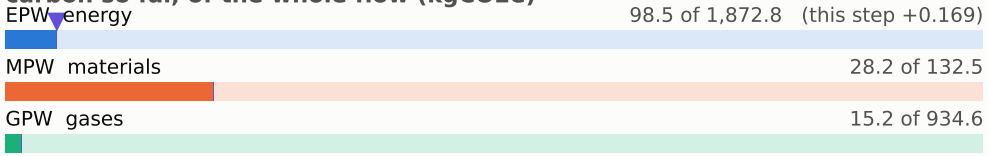

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

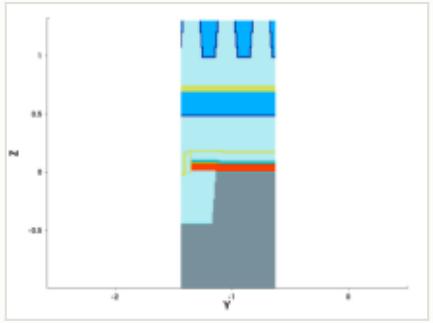

y cut at -1.035 µm

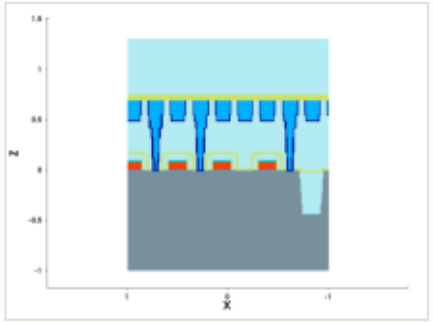

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

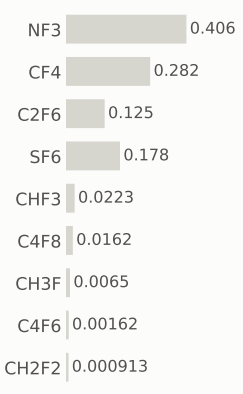

Step #1800: Wafer_clean

clean · Wafer_clean

0.169	142.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

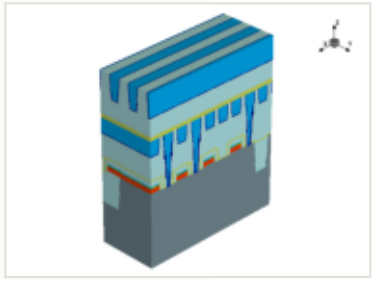

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

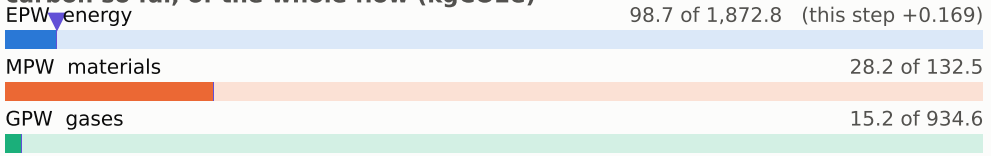

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

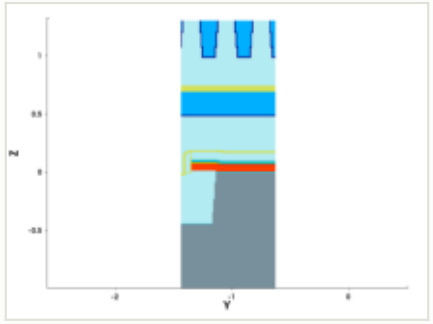

y cut at -1.035 µm

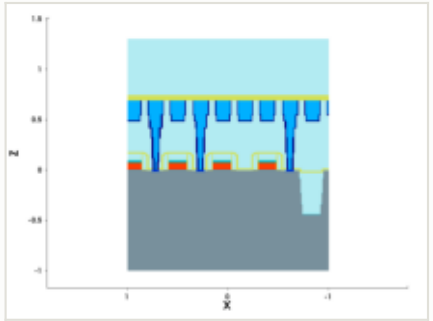

mask for this step

no mask for this step

steps by process area

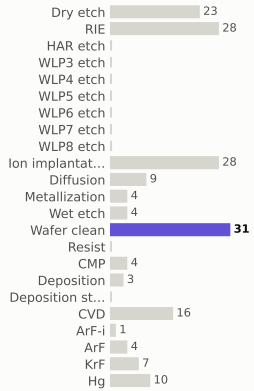

materials deposited (g)

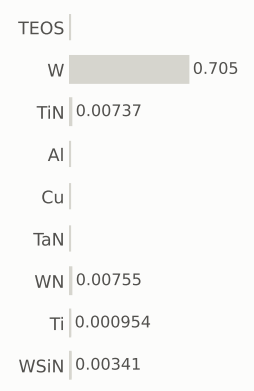

gases emitted (g)

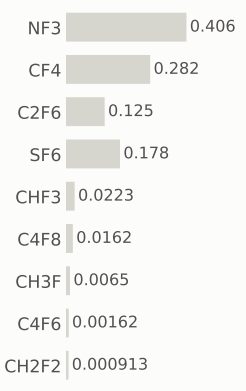

Step #1820: CVD

depo_isotropic · CVD

1.31	143.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

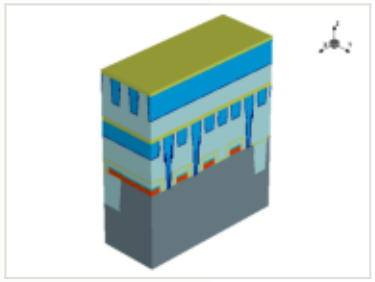

this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

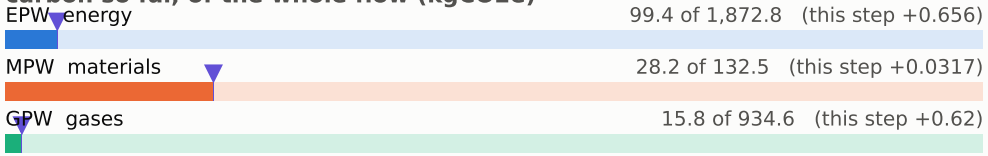

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

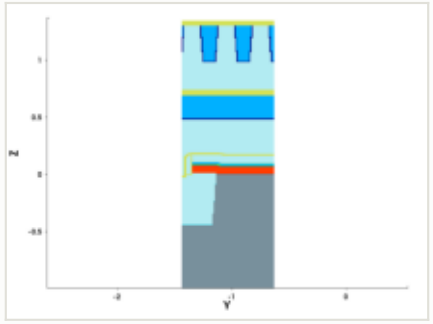

y cut at -1.035 µm

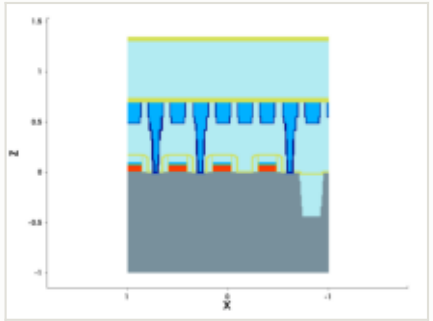

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #1830: CVD

depo_isotropic · CVD

1.31	144.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

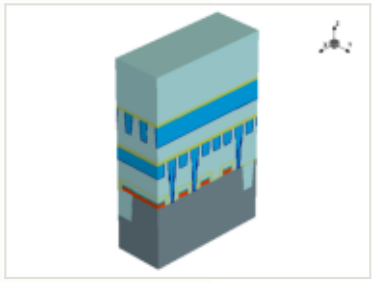

this step

process area	CVD
material	—
thickness	0.73 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

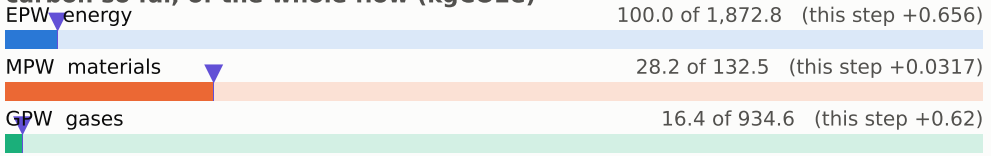

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

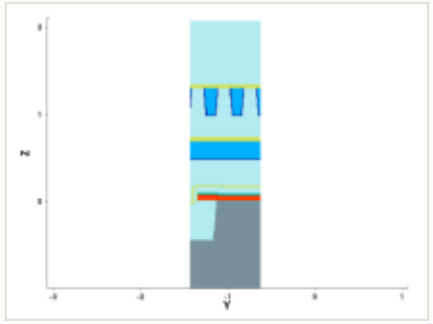

y cut at -1.035 µm

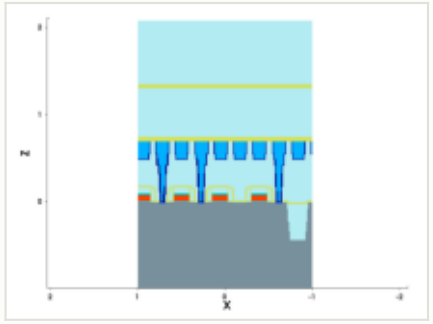

mask for this step

no mask for this step

steps by process area

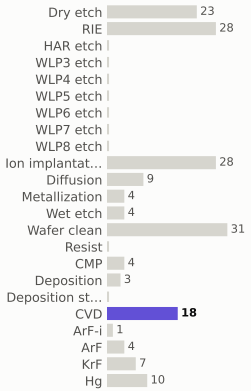

materials deposited (g)

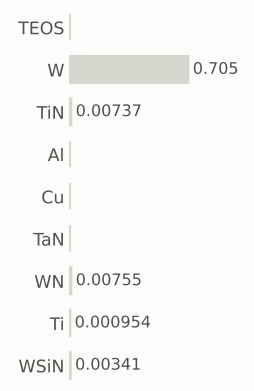

gases emitted (g)

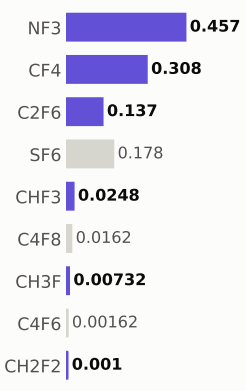

Step #1840: ArF

litho_patterning · ArF

0.199	144.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

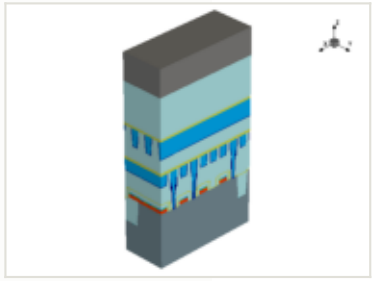

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

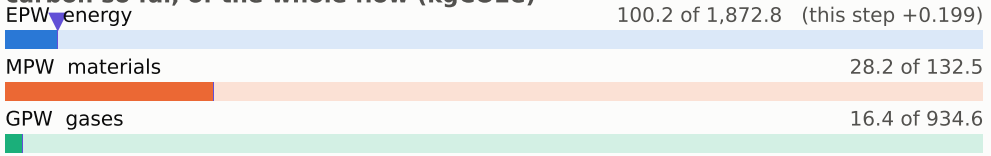

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

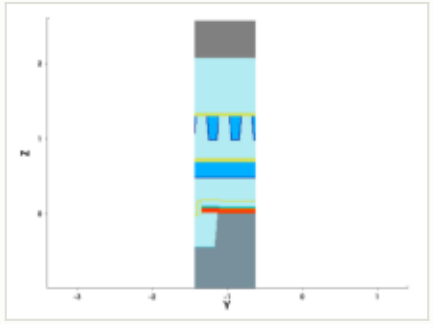

y cut at -1.035 µm

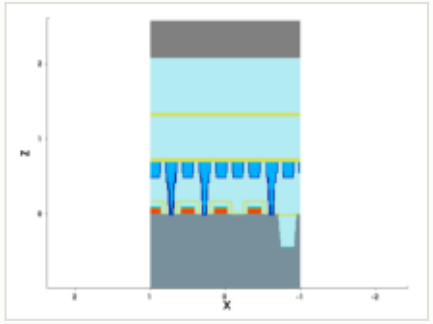

mask: layer 23:0, positive (OASIS)

steps by process area



materials deposited (g)

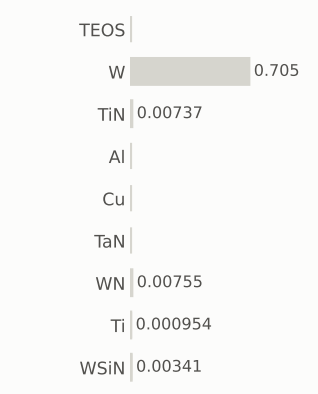

gases emitted (g)

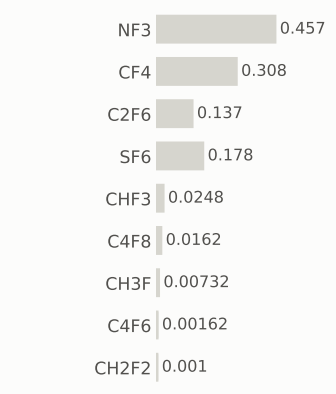

Step #1850: RIE

etch_anisotropic · RIE

1.04	145.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

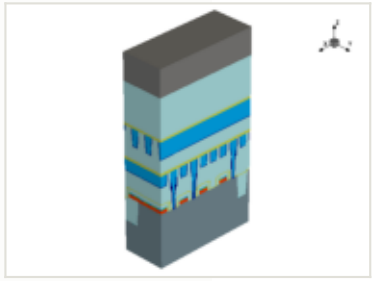

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

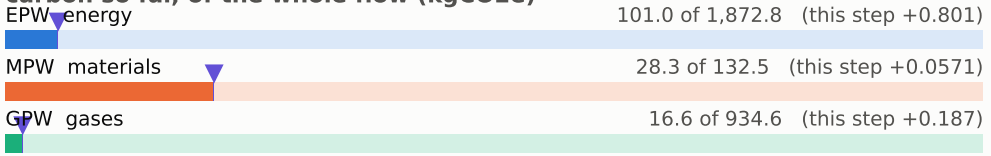

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

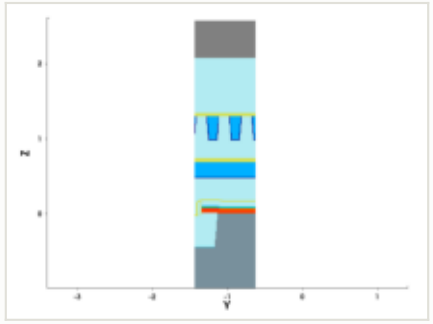

y cut at -1.035 µm

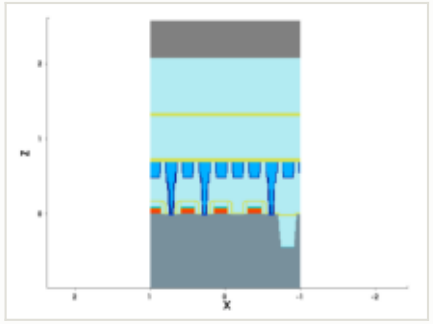

mask for this step

no mask for this step

steps by process area

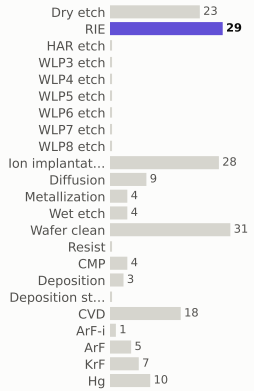

materials deposited (g)

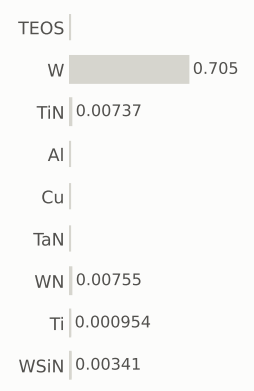

gases emitted (g)

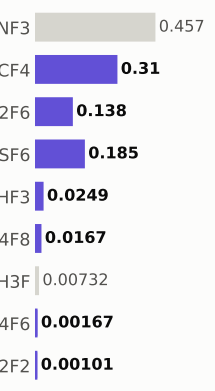

Step #1860: Dry_etch

etch_strip · Dry_etch

0.801	146.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

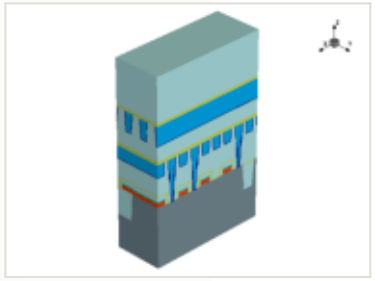

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

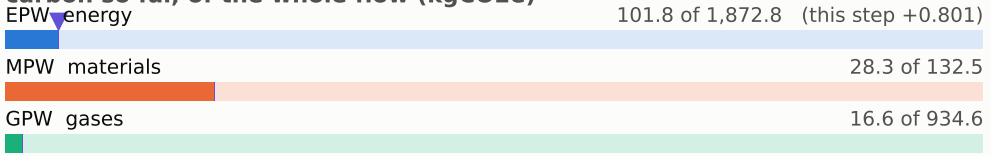

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

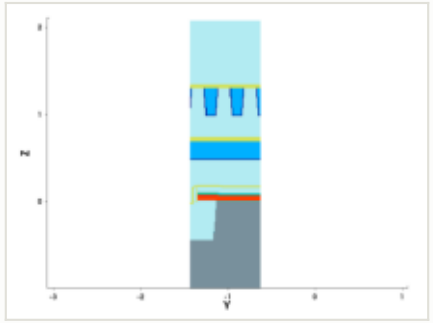

y cut at -1.035 µm

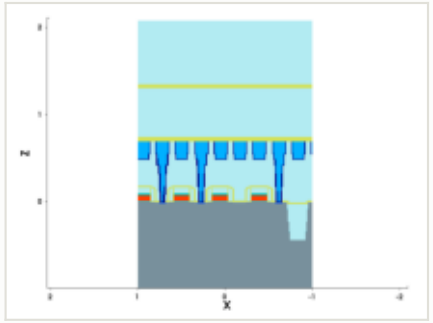

mask for this step

no mask for this step

steps by process area

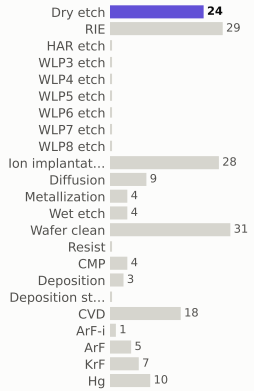

materials deposited (g)

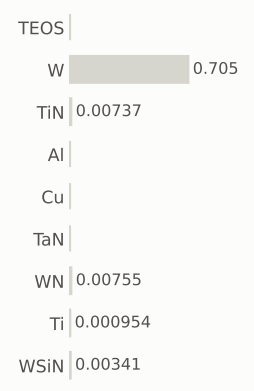

gases emitted (g)

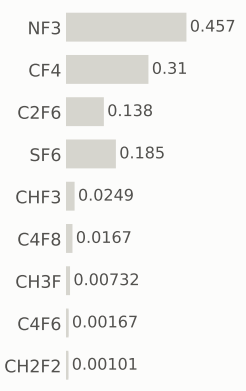

Step #1870: Wafer_clean

clean · Wafer_clean

0.169	146.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

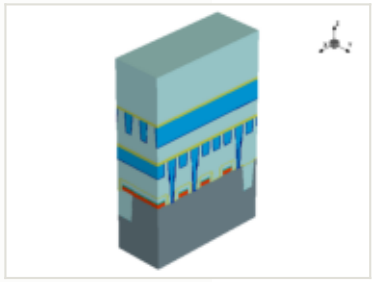

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

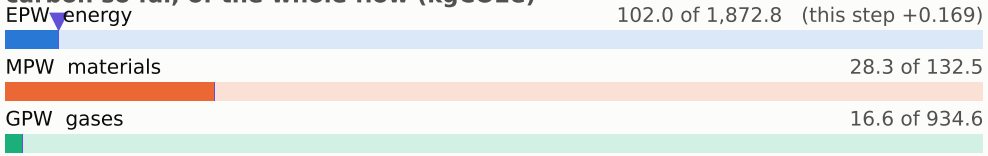

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

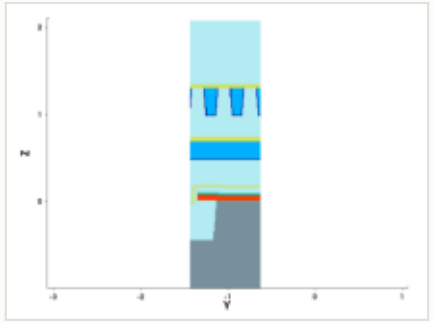

y cut at -1.035 µm

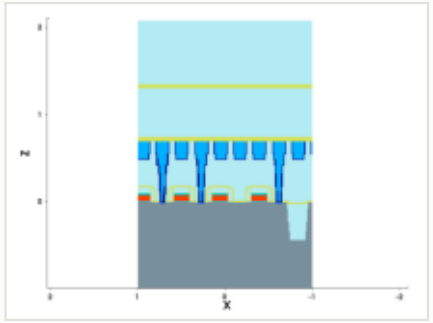

mask for this step

no mask for this step

steps by process area

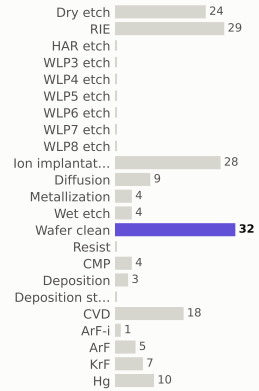

materials deposited (g)

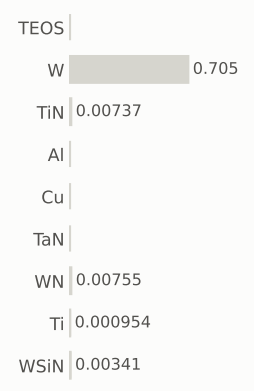

gases emitted (g)

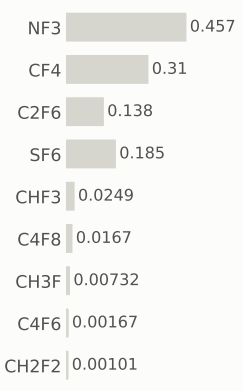

Step #1880: KrF

litho_patterning · KrF

0.199	147.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

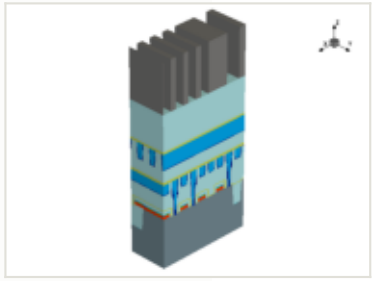

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

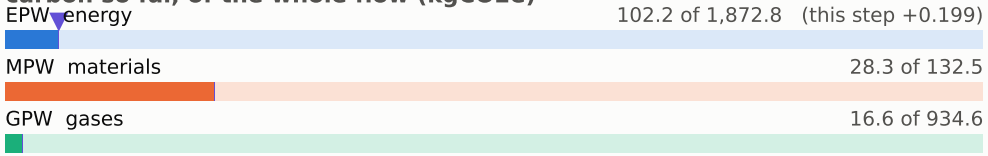

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

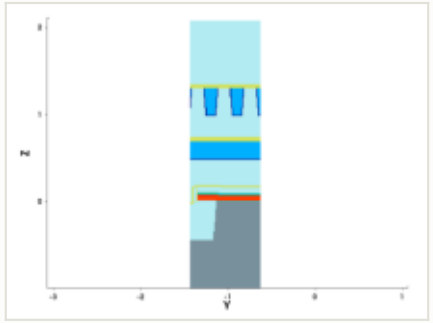

y cut at -1.035 µm

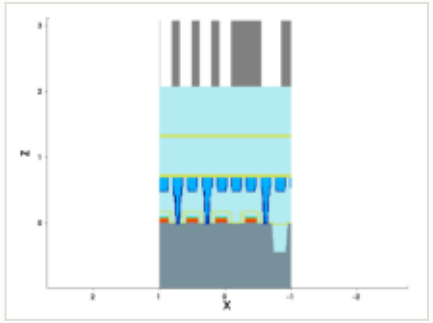

mask: layer 24:0 (OASIS)

steps by process area

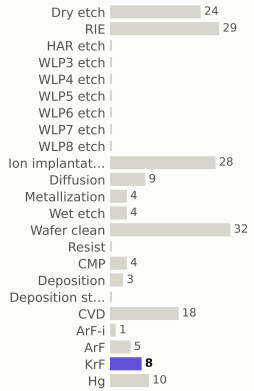

materials deposited (g)

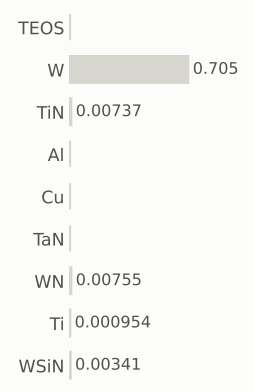

gases emitted (g)

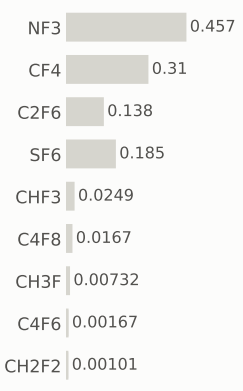

Step #1890: RIE

etch_anisotropic · RIE

1.04	148.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

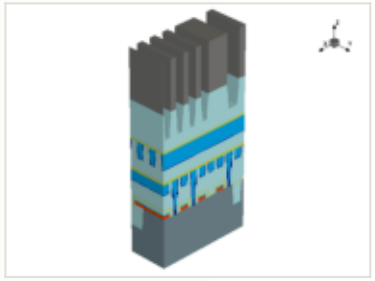

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

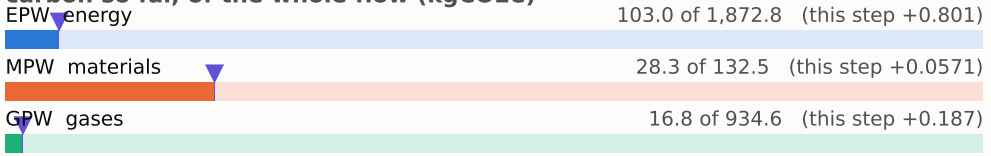

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

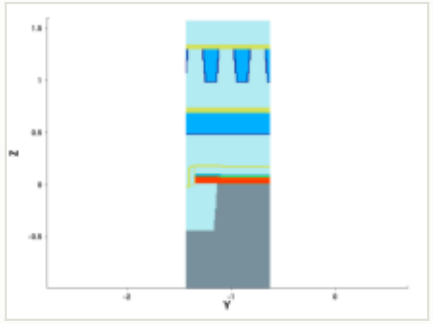

y cut at -1.035 µm

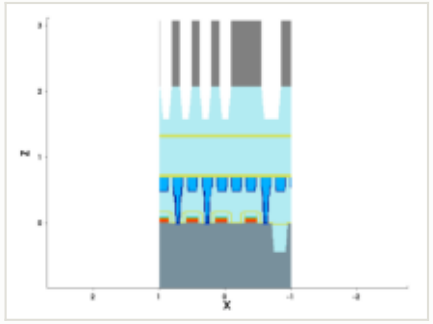

mask for this step

no mask for this step

steps by process area

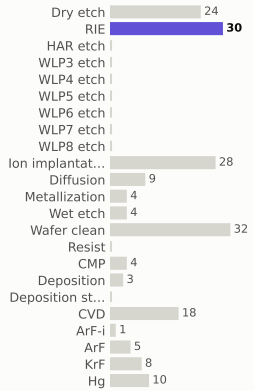

materials deposited (g)

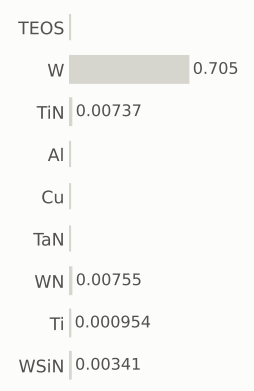

gases emitted (g)

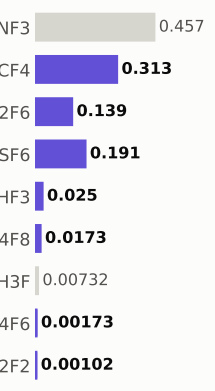

Step #1900: RIE

etch_anisotropic · RIE

1.04	149.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

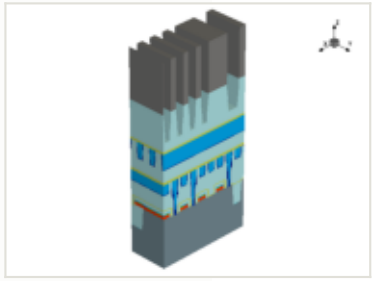

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

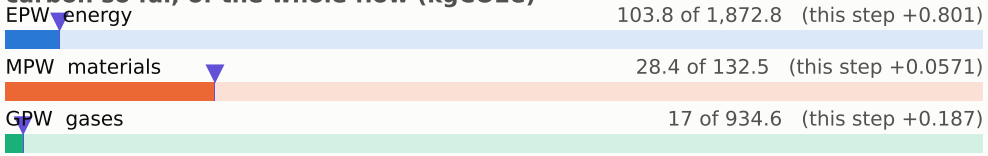

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

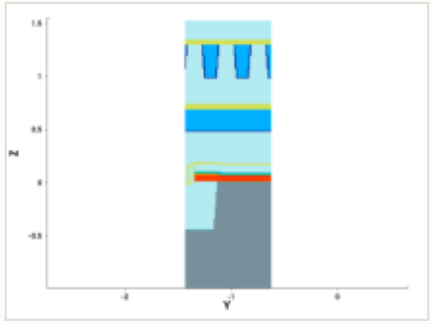

y cut at -1.035 µm

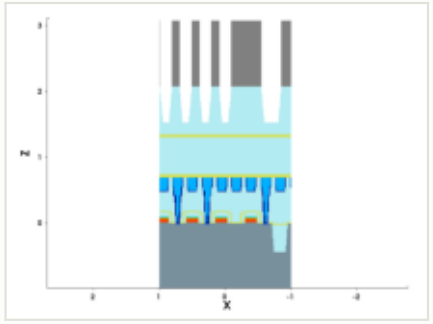

mask for this step

no mask for this step

steps by process area



materials deposited (g)

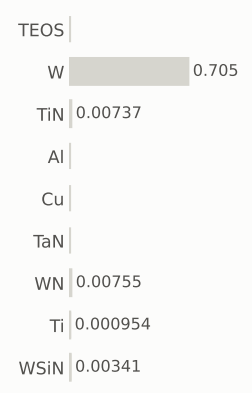

gases emitted (g)

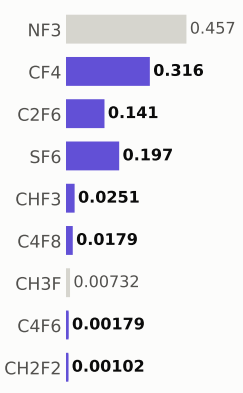

Step #1910: Dry_etch

etch_strip · Dry_etch

0.801	149.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

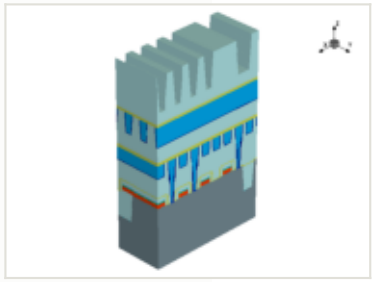

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

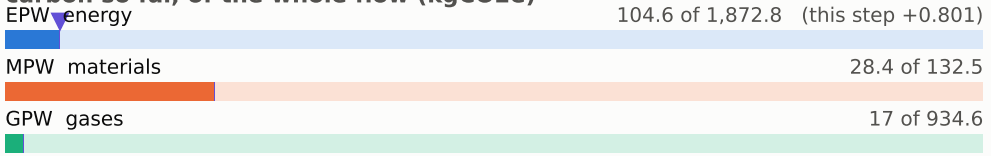

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

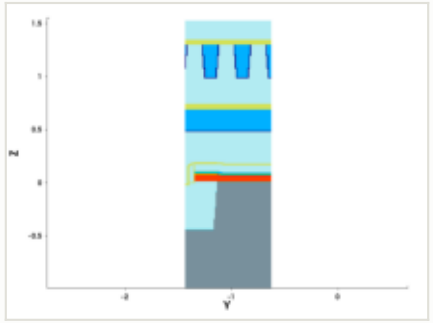

y cut at -1.035 µm

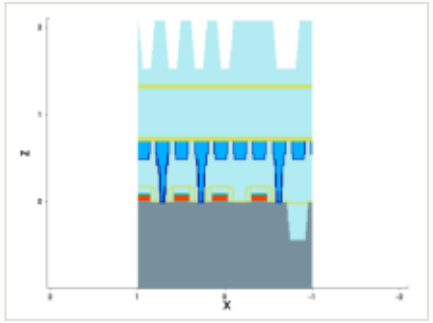

mask for this step

no mask for this step

steps by process area

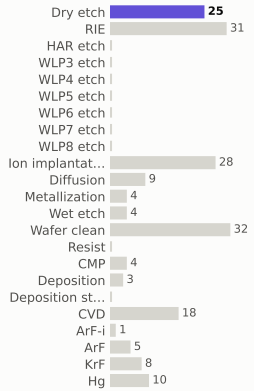

materials deposited (g)

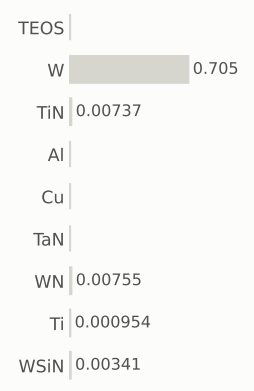

gases emitted (g)

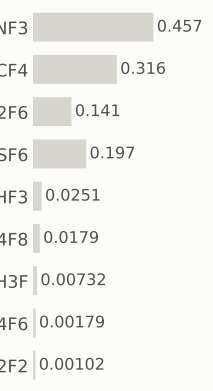

Step #1920: Wafer_clean

clean · Wafer_clean

0.169	150.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

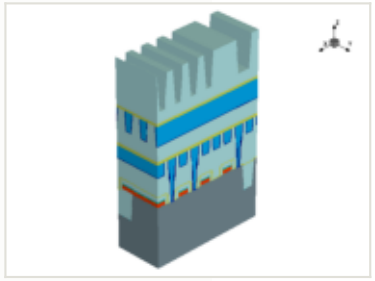

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

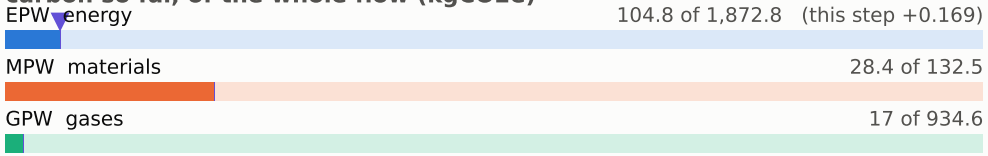

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

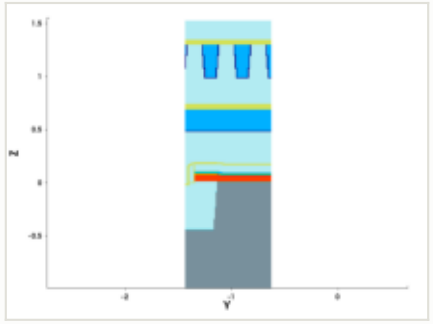

y cut at -1.035 µm

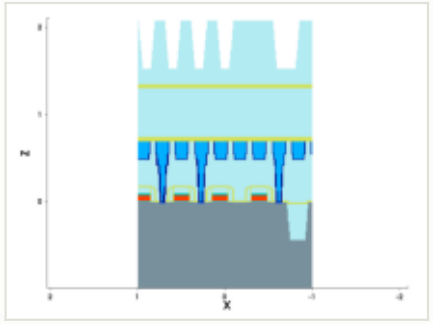

mask for this step

no mask for this step

steps by process area

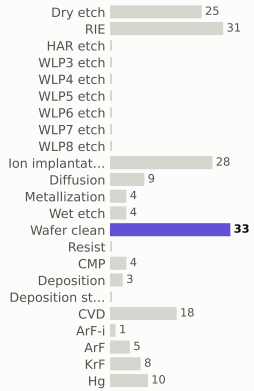

materials deposited (g)

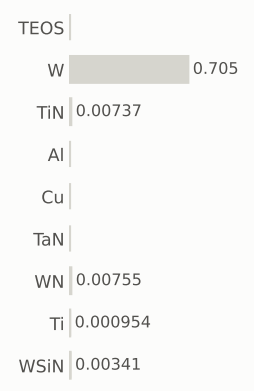

gases emitted (g)



Step #1930: CVD

depo_isotropic · CVD

1.31	151.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

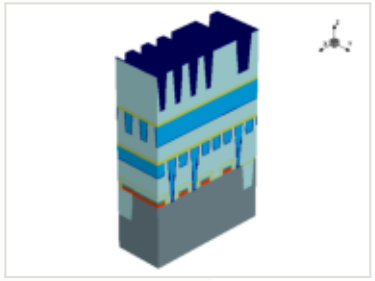

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0319 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy 105.4 of 1,872.8 (this step +0.656)

MPW materials 28.4 of 132.5 (this step +0.0319)

GPW gases 17.6 of 934.6 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

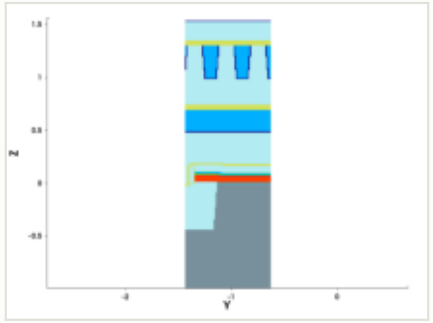

y cut at -1.035 µm

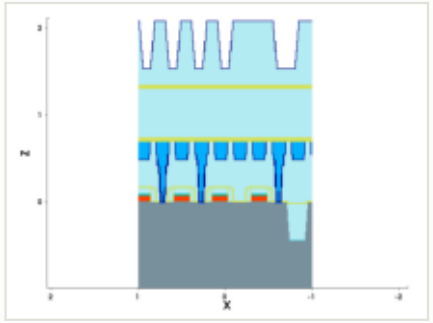

mask for this step

no mask for this step

steps by process area

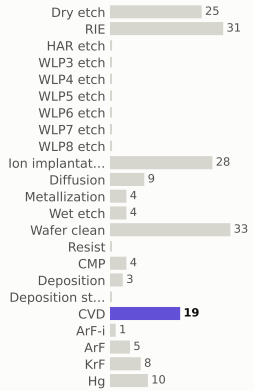

materials deposited (g)

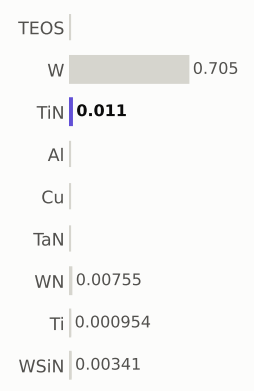

gases emitted (g)

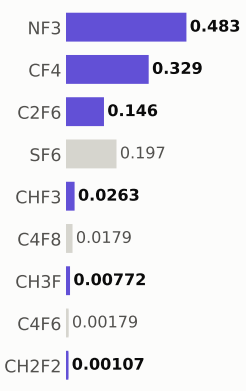

Step #1940: Metallization

depo_isotropic · Metallization

1.28	152.7	0.043%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

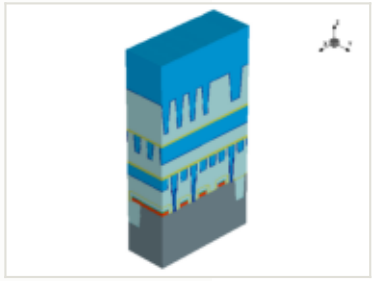

this step

process area	Metallization
material	W
thickness	0.7 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0724 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.28 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

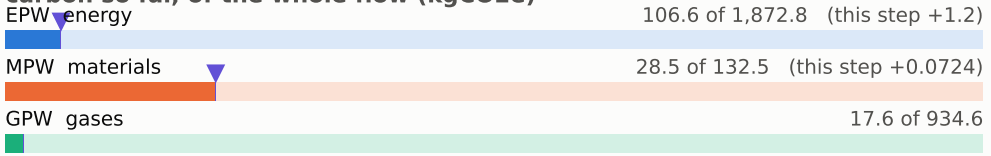

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

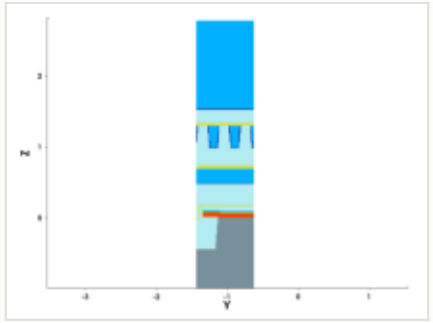

y cut at -1.035 µm

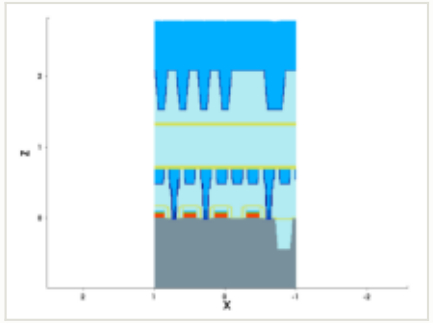

mask for this step

no mask for this step

steps by process area

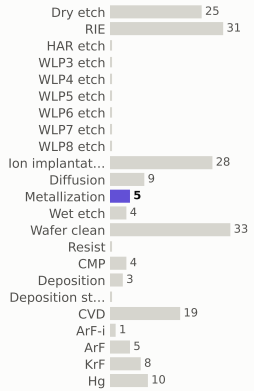

materials deposited (g)

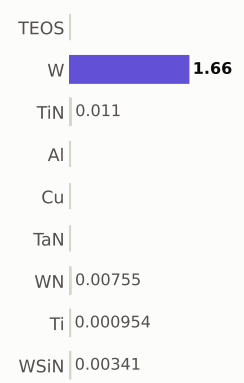

gases emitted (g)

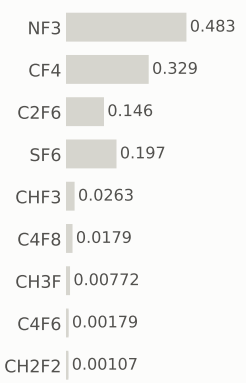

Step #1950: CMP

etch_cmp · CMP

0.169	152.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

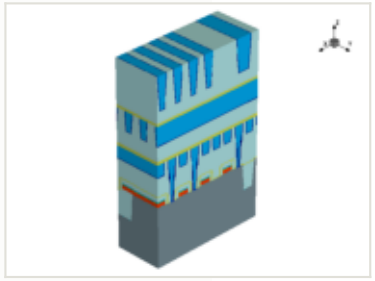

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

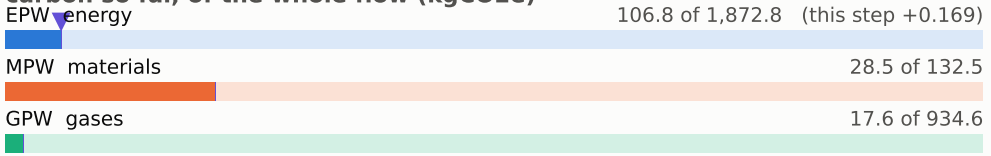

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

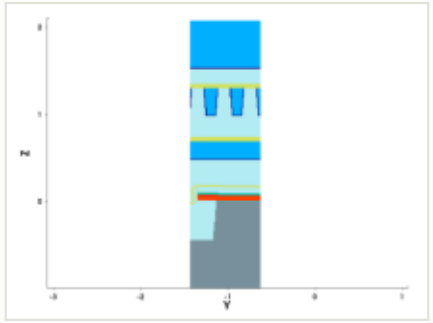

y cut at -1.035 µm

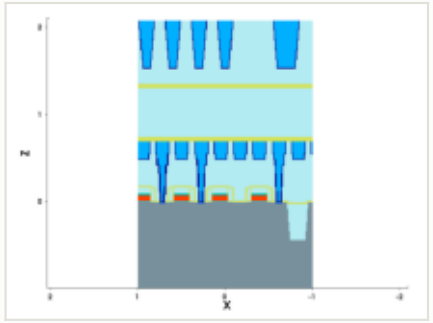

mask for this step

no mask for this step

steps by process area

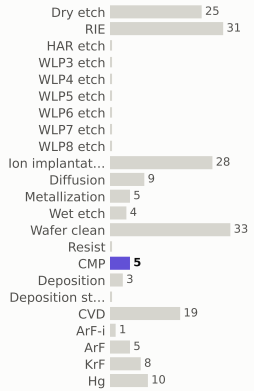

materials deposited (g)

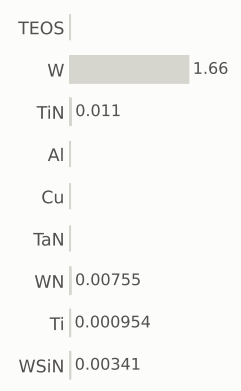

gases emitted (g)

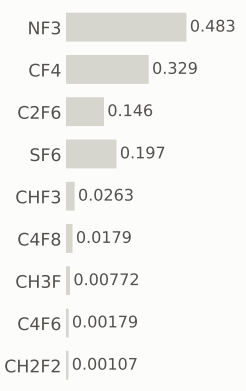

Step #1960: Wafer_clean

clean · Wafer_clean

0.169	153.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

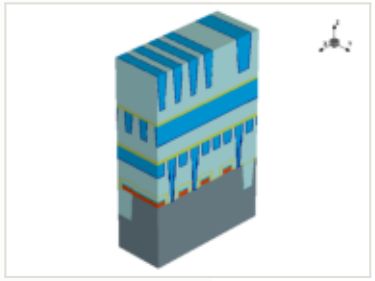

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

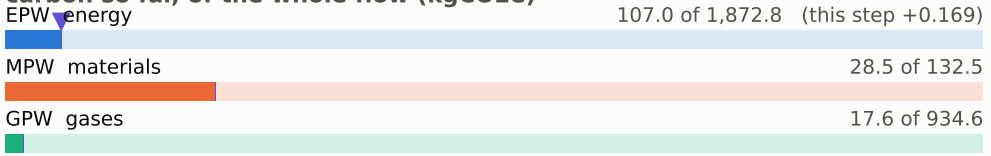

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

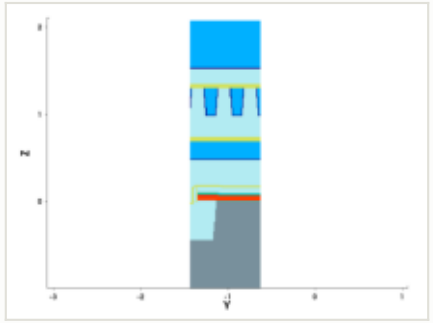

y cut at -1.035 µm

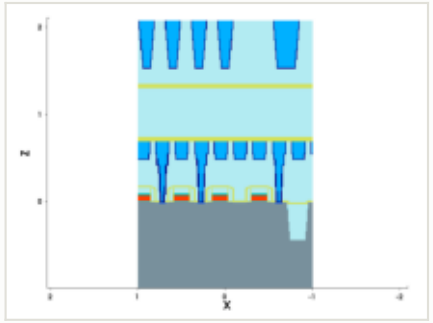

mask for this step

no mask for this step

steps by process area

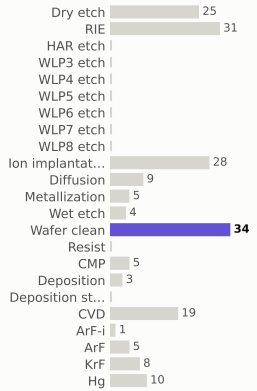

materials deposited (g)

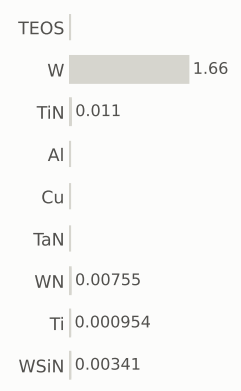

gases emitted (g)

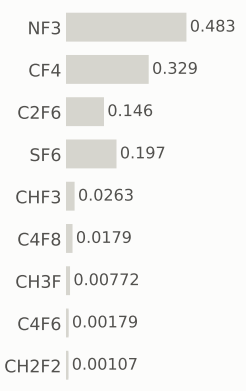

Step #1970: CVD

depo_isotropic · CVD

1.31	154.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

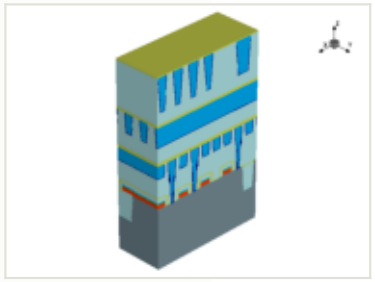

this step

process area	CVD
material	—
thickness	0.019 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

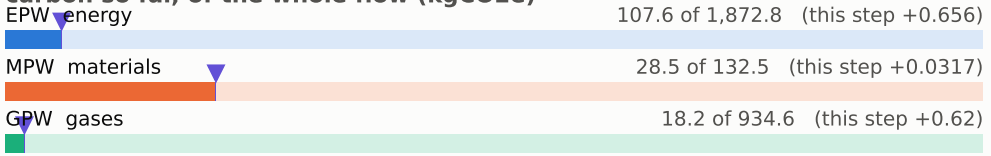

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

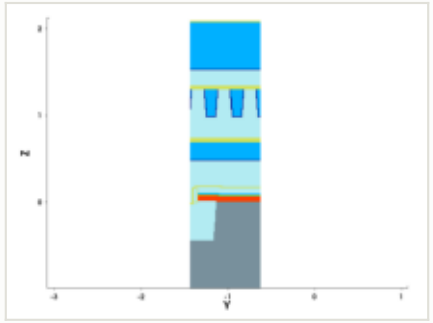

y cut at -1.035 µm

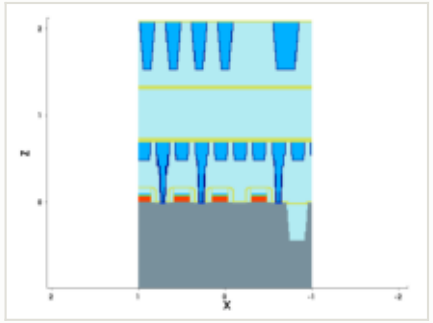

mask for this step

no mask for this step

steps by process area

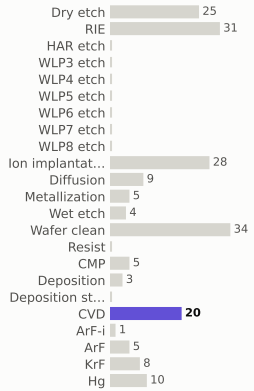

materials deposited (g)

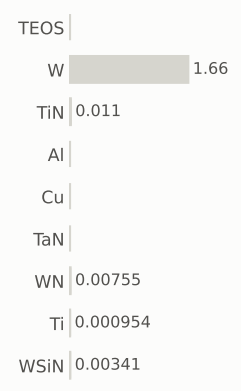

gases emitted (g)

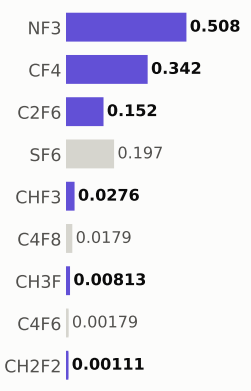

Step #1980: CVD

depo_isotropic · CVD

1.31	155.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

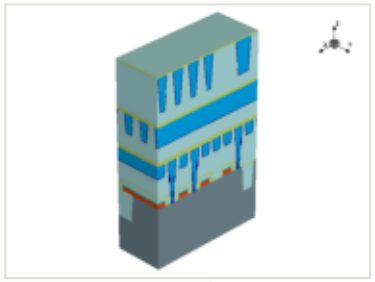

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

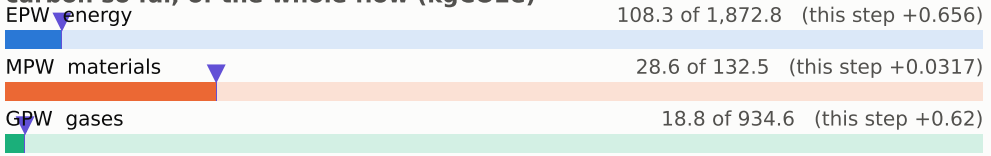

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

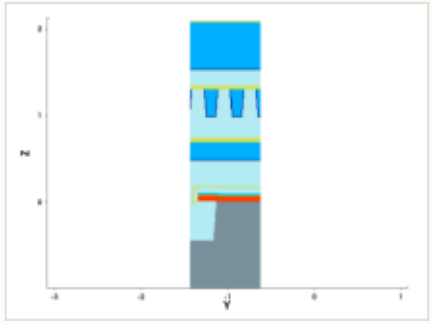

y cut at -1.035 µm

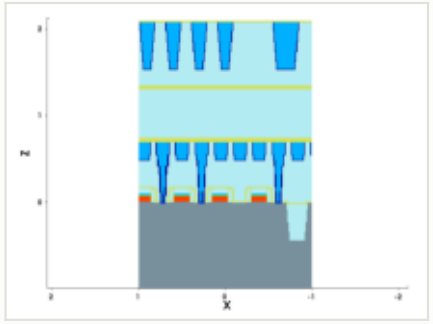

mask for this step

no mask for this step

steps by process area

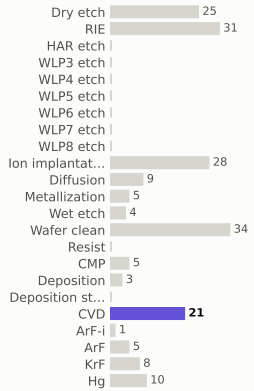

materials deposited (g)

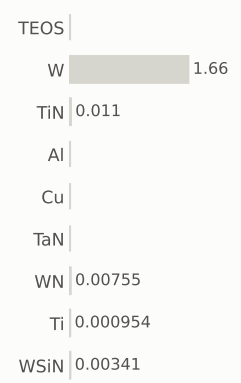

gases emitted (g)

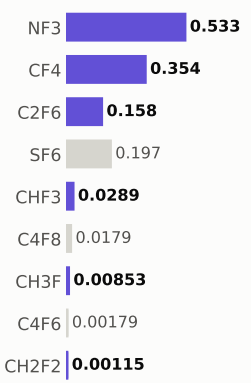

Step #1990: CVD

depo_isotropic · CVD

1.31	157.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

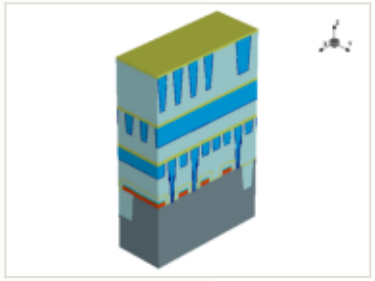

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.019 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

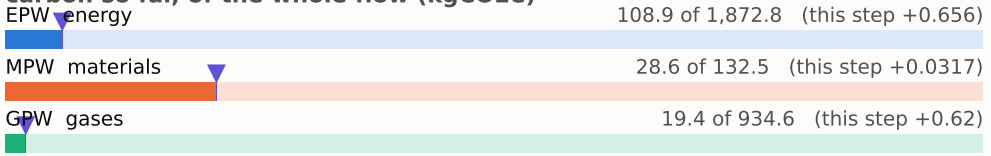

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

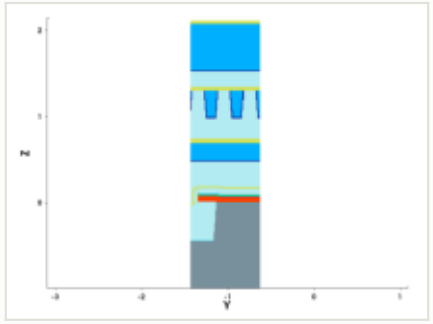

y cut at -1.035 µm

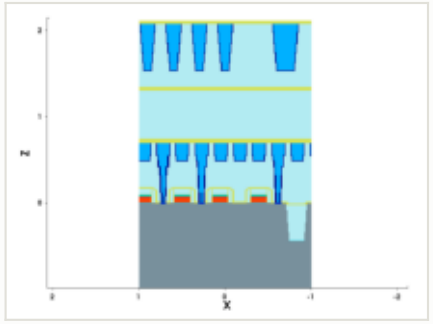

mask for this step

no mask for this step

steps by process area

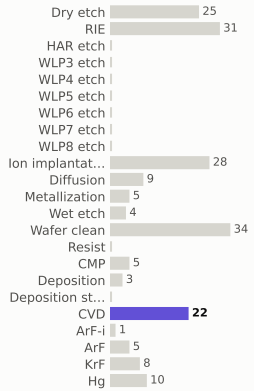

materials deposited (g)

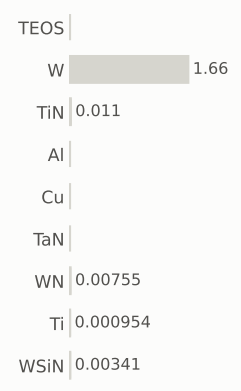

gases emitted (g)

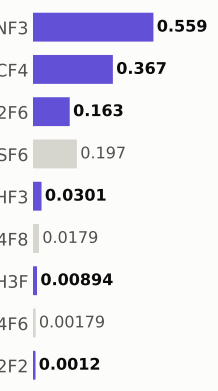

Step #2000: CVD

depo_isotropic · CVD

1.31	158.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

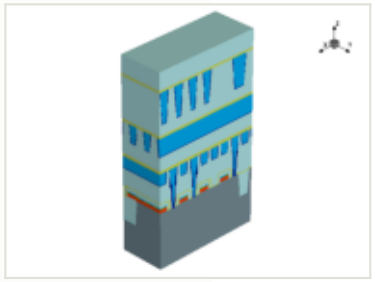

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.31 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

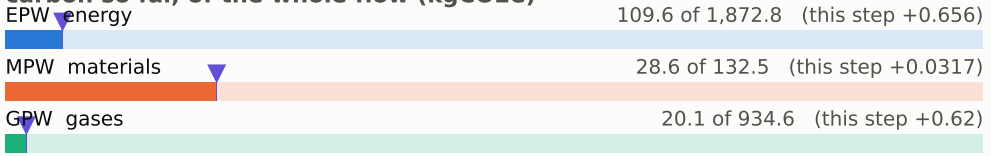

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

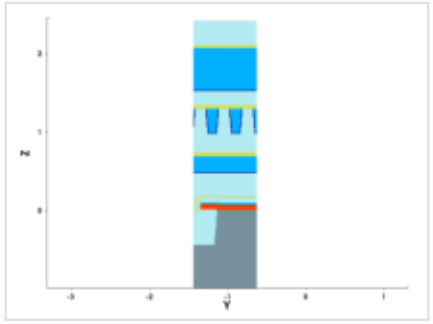

y cut at -1.035 µm

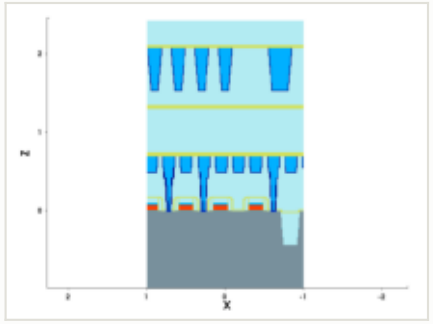

mask for this step

no mask for this step

steps by process area

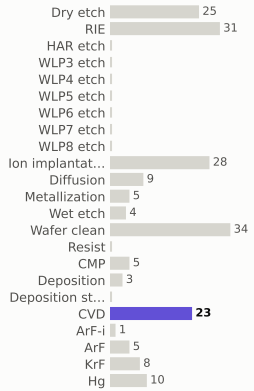

materials deposited (g)

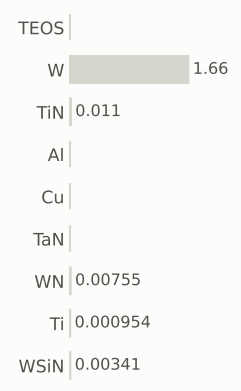

gases emitted (g)

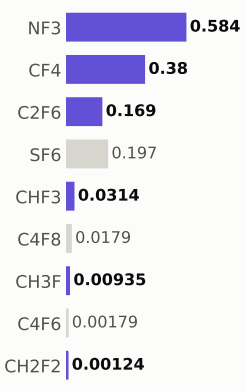

Step #2020: CVD

depo_isotropic · CVD

1.31	159.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

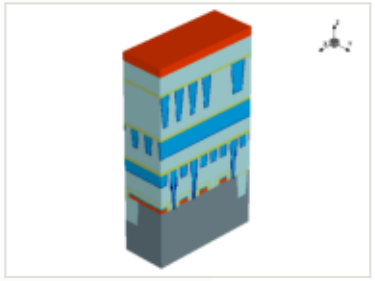

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

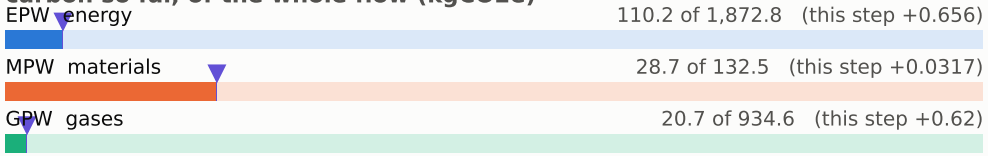

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

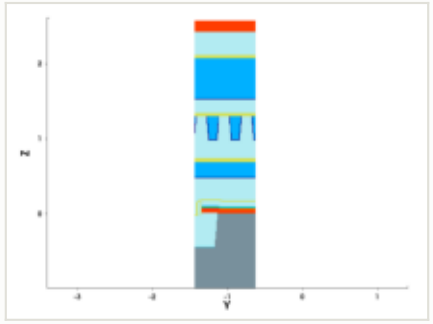

y cut at -1.035 µm

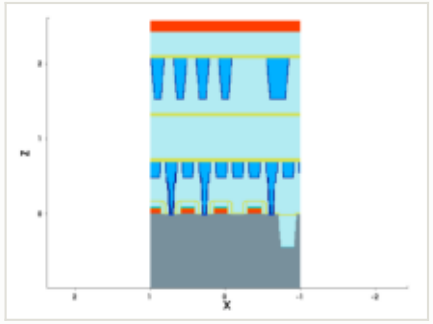

mask for this step

no mask for this step

steps by process area

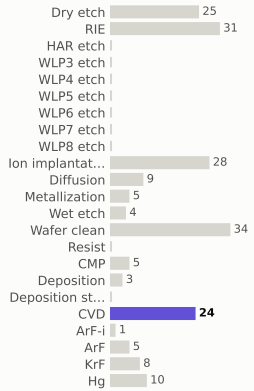

materials deposited (g)

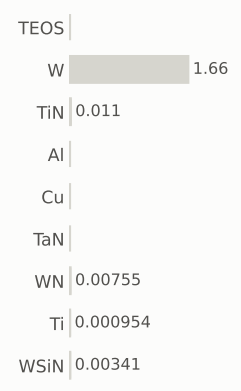

gases emitted (g)

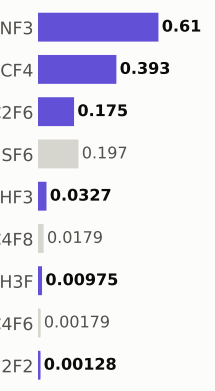

Step #2030: CVD

depo_isotropic · CVD

1.31	160.9	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

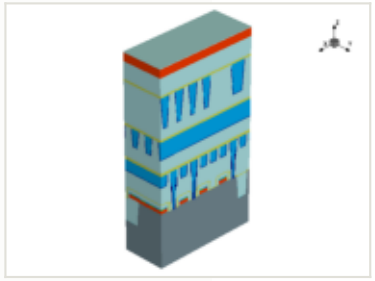

this step

process area	CVD
material	—
thickness	0.012 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

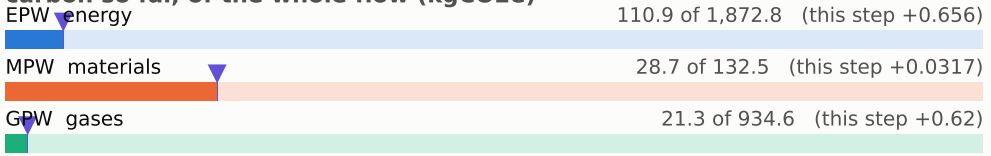

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

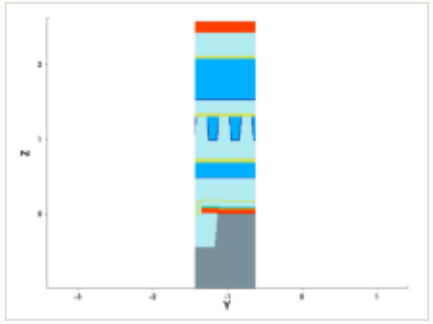

y cut at -1.035 µm

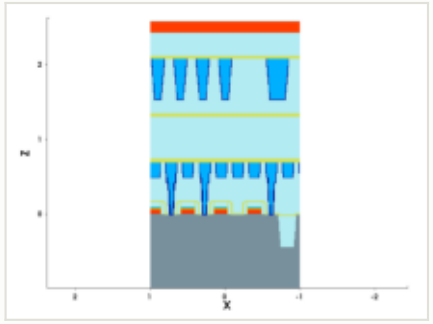

mask for this step

no mask for this step

steps by process area

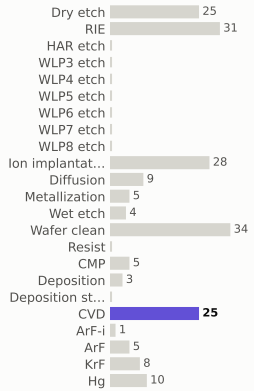

materials deposited (g)

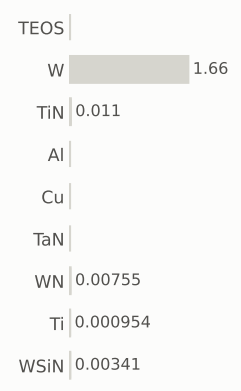

gases emitted (g)

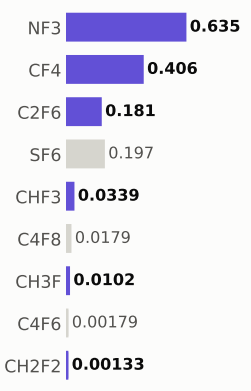

Step #2040: Diffusion

implant_ellipsoid · Diffusion

0.801	161.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

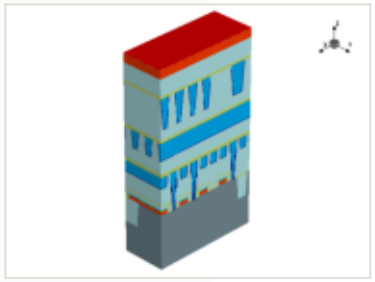

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

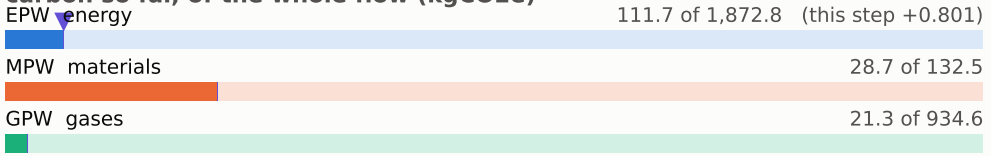

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

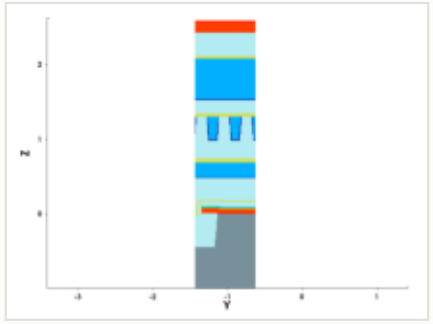

y cut at -1.035 µm

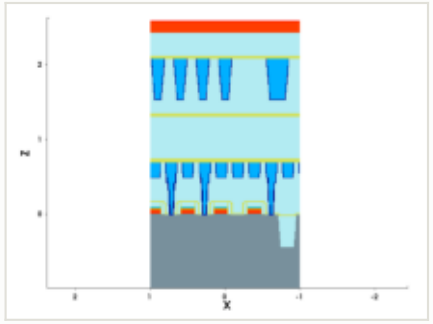

mask for this step

no mask for this step

steps by process area

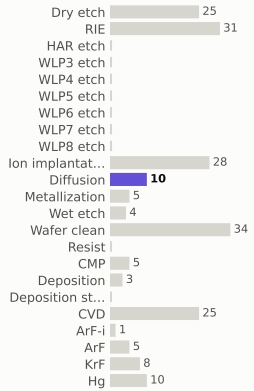

materials deposited (g)

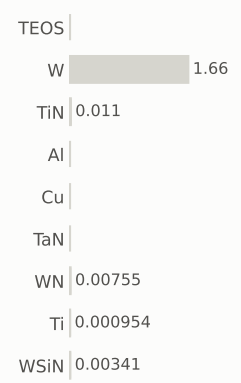

gases emitted (g)

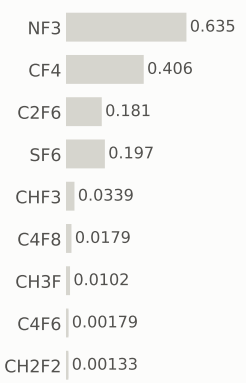

Step #2050: Diffusion

anneal · Diffusion

0.801	162.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

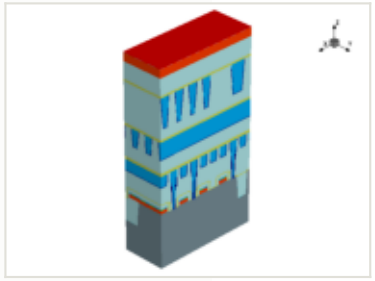

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

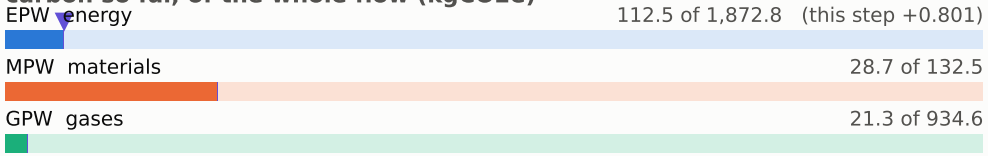

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

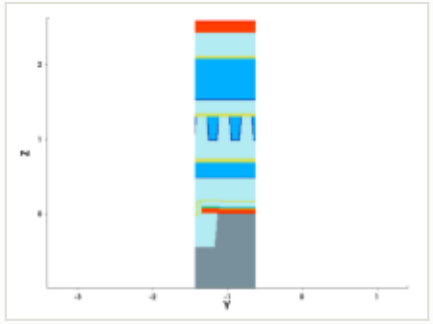

y cut at -1.035 µm

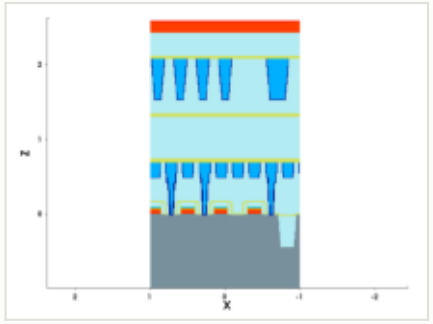

mask for this step

no mask for this step

steps by process area

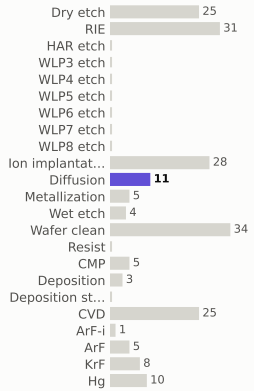

materials deposited (g)

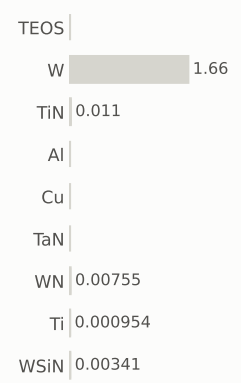

gases emitted (g)

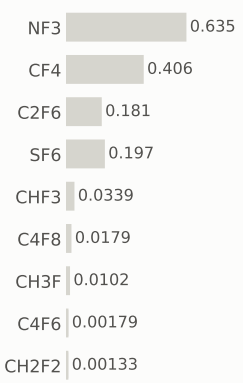

Step #2060: CVD

depo_isotropic · CVD

1.31	163.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

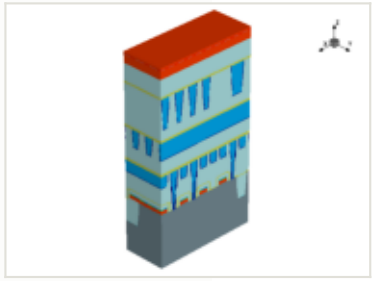

this step

process area	CVD
material	—
thickness	0.036 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

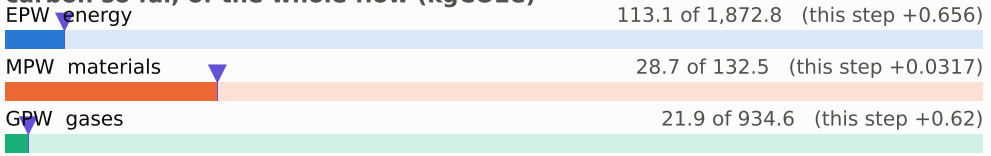

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

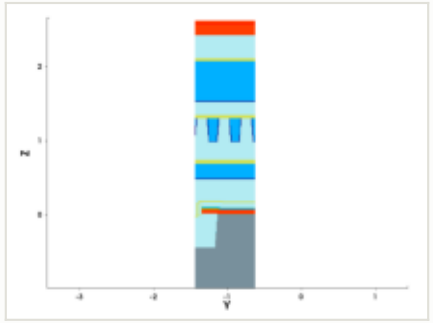

y cut at -1.035 µm

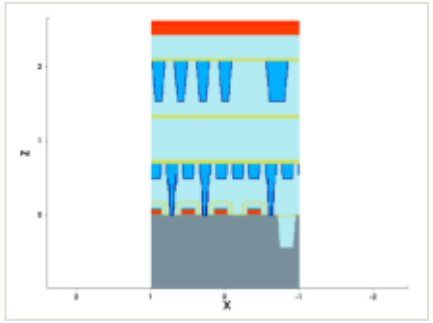

mask for this step

no mask for this step

steps by process area

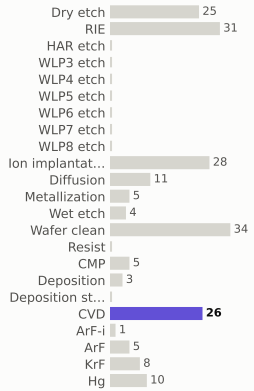

materials deposited (g)

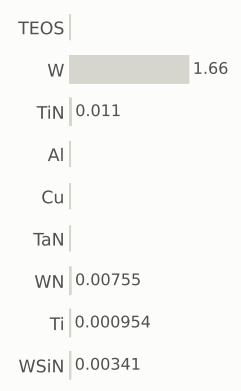

gases emitted (g)

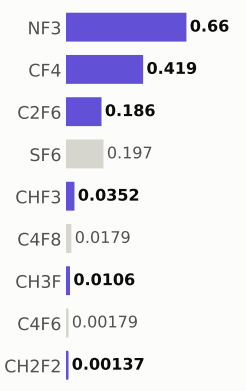

Step #2070: CVD

depo_isotropic · CVD

1.31	165.1	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

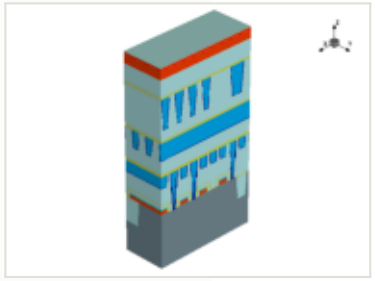

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.007 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

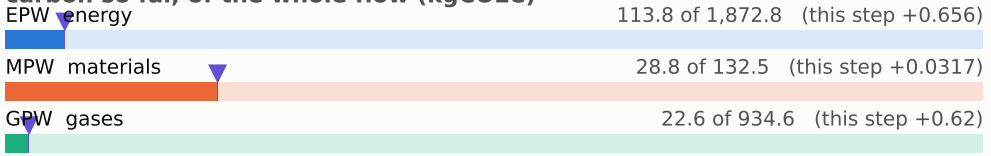

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

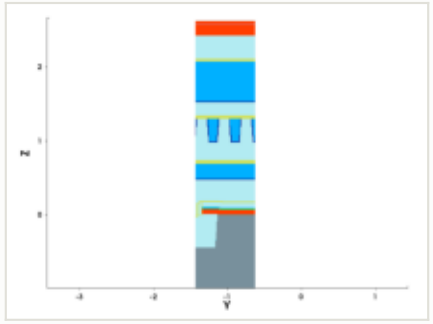

y cut at -1.035 µm

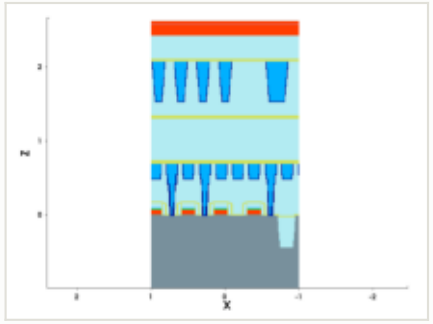

mask for this step

no mask for this step

steps by process area



materials deposited (g)

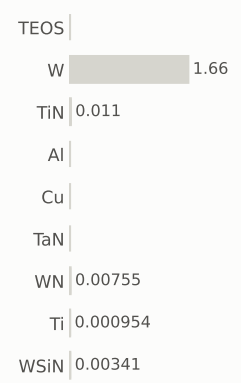

gases emitted (g)

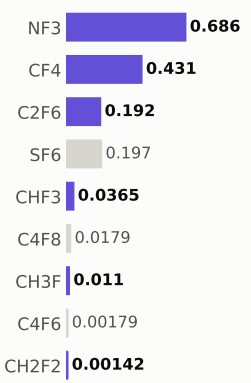

Step #2080: Diffusion

implant_ellipsoid · Diffusion

0.801	165.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

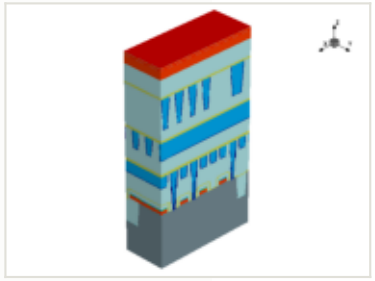

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

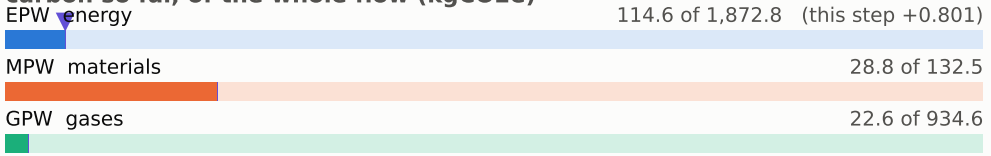

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

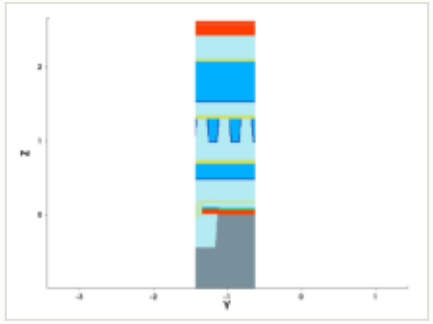

y cut at -1.035 µm

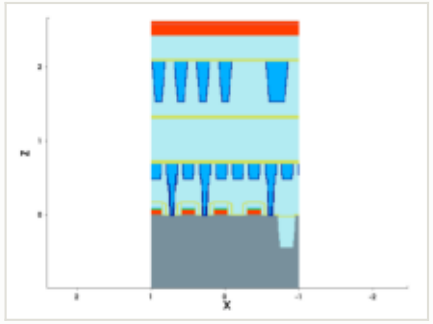

mask for this step

no mask for this step

steps by process area

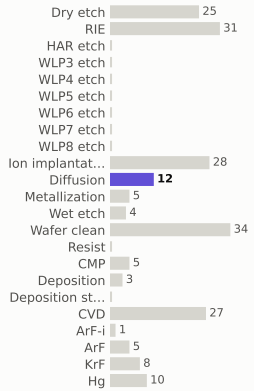

materials deposited (g)

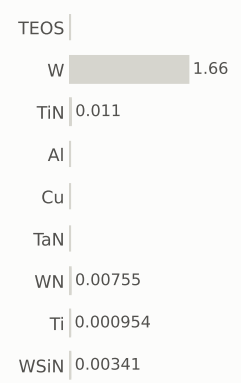

gases emitted (g)

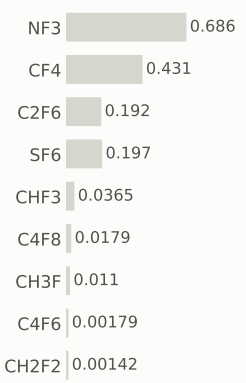

Step #2090: Diffusion

anneal · Diffusion

0.801	166.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

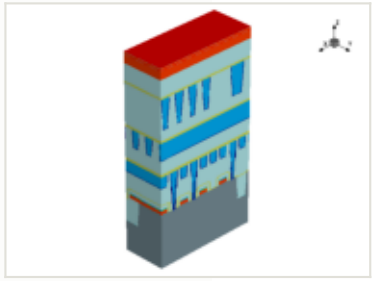

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

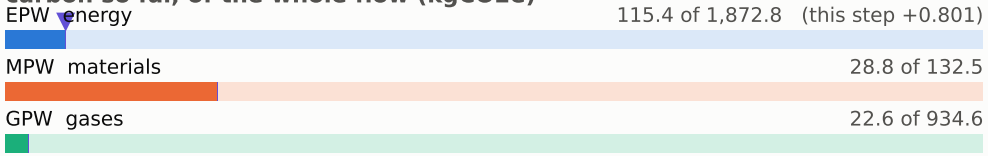

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

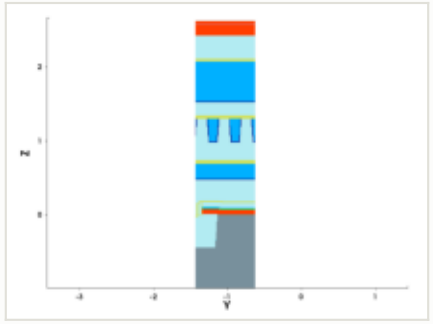

y cut at -1.035 µm

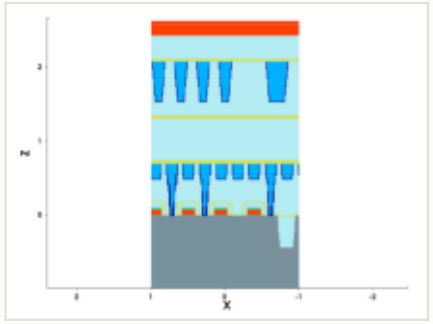

mask for this step

no mask for this step

steps by process area

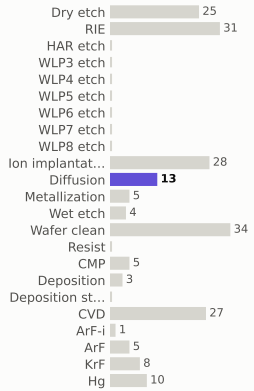

materials deposited (g)

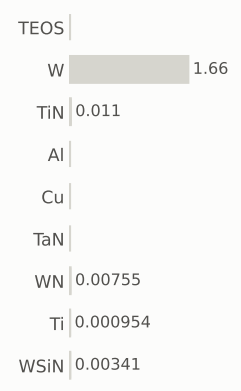

gases emitted (g)

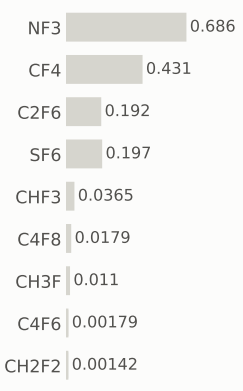

Step #2100: CVD

depo_isotropic · CVD

1.31	168.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

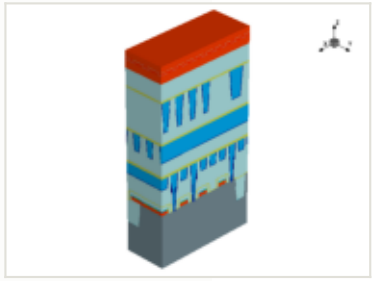

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.105 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

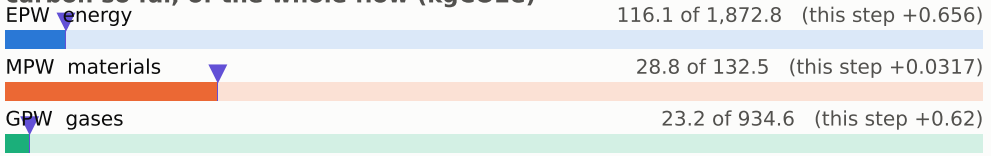

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

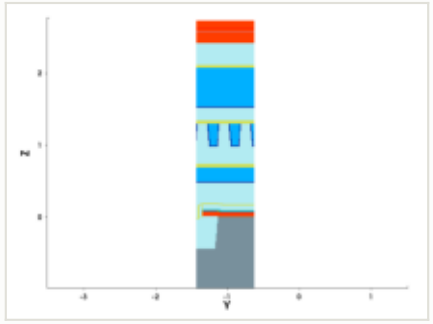

y cut at -1.035 µm

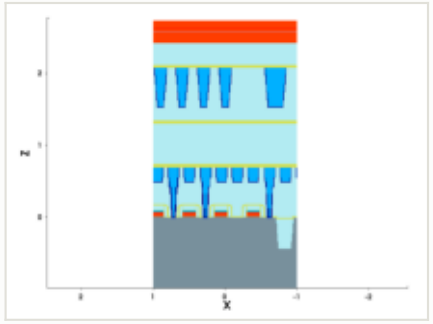

mask for this step

no mask for this step

steps by process area



materials deposited (g)

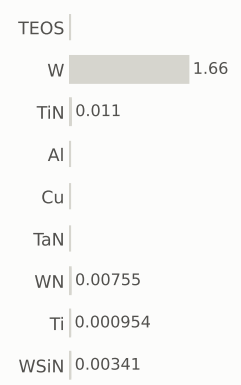

gases emitted (g)

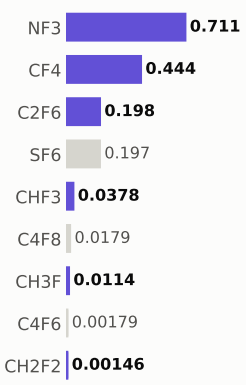

Step #2110: KrF

litho_patterning · KrF

0.199	168.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

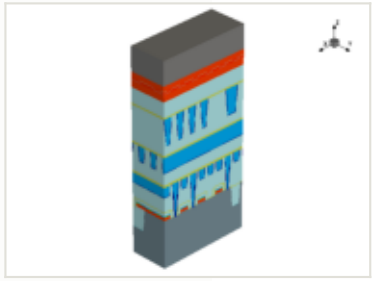

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

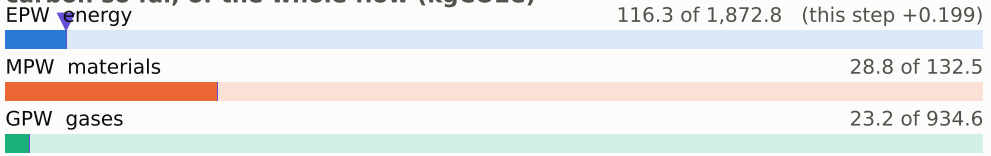

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

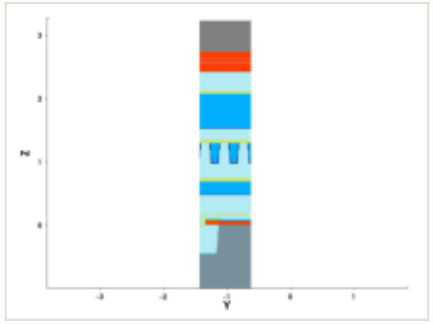

y cut at -1.035 µm

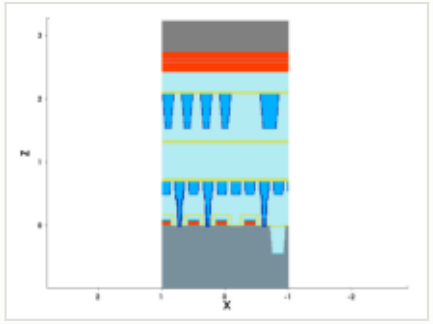

mask: layer 25:0, positive (OASIS)

steps by process area

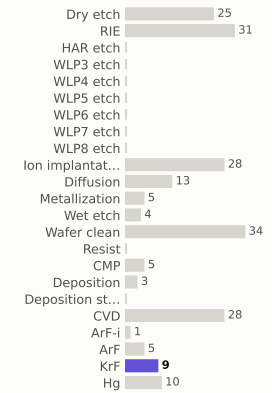

materials deposited (g)

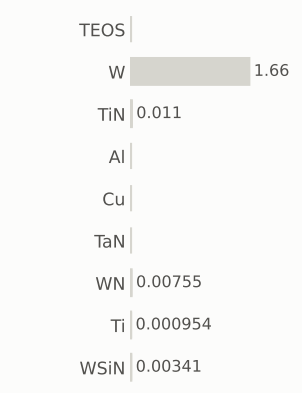

gases emitted (g)

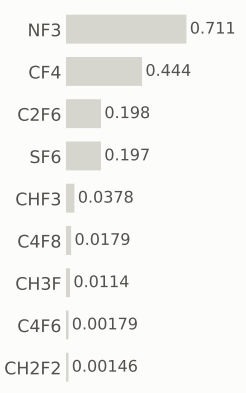

Step #2120: RIE

etch_anisotropic · RIE

1.04	169.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

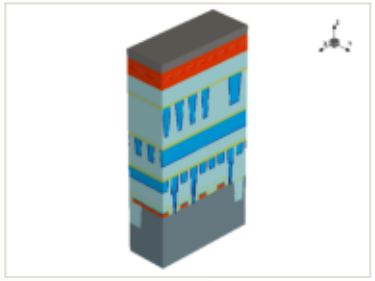

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

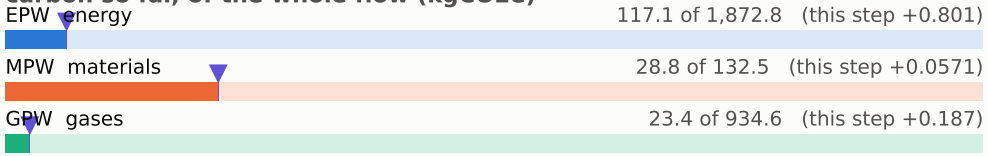

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

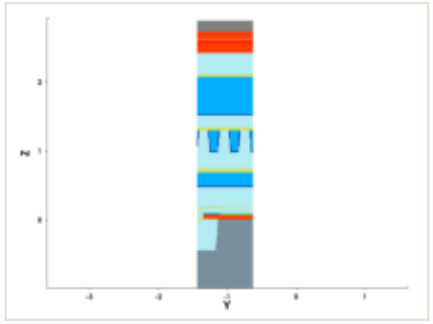

y cut at -1.035 µm

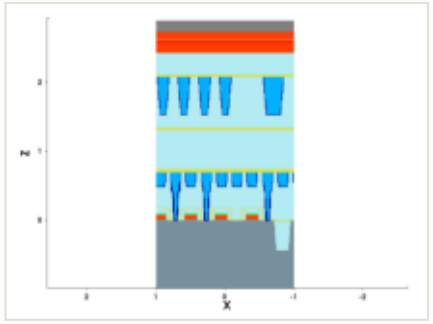

mask for this step

no mask for this step

steps by process area



materials deposited (g)

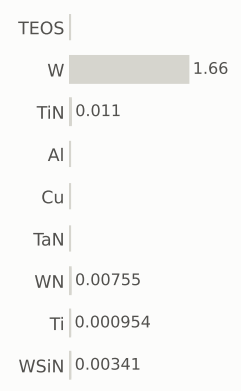

gases emitted (g)

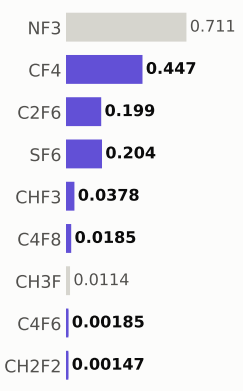

Step #2130: Dry_etch

etch_strip · Dry_etch

0.801	170.1	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

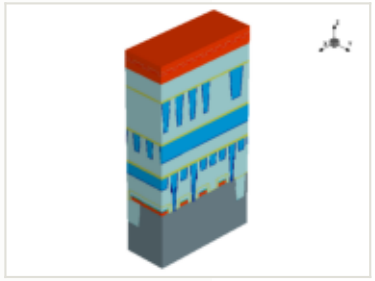

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

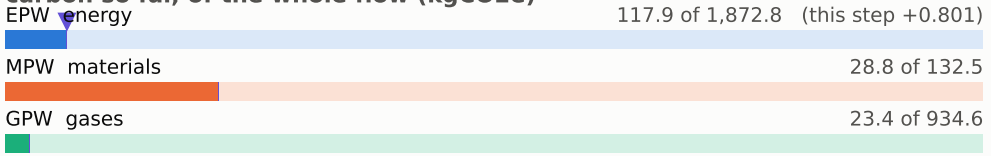

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

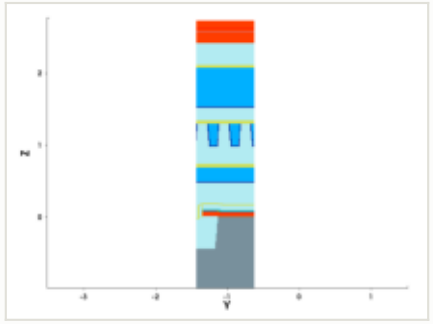

y cut at -1.035 µm

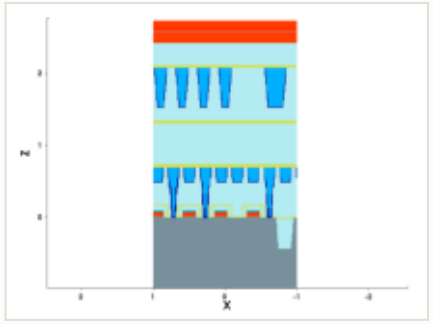

mask for this step

no mask for this step

steps by process area

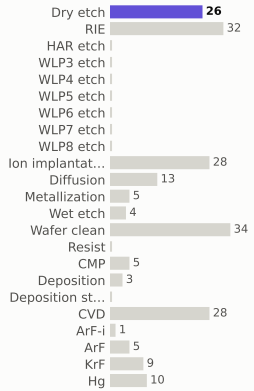

materials deposited (g)

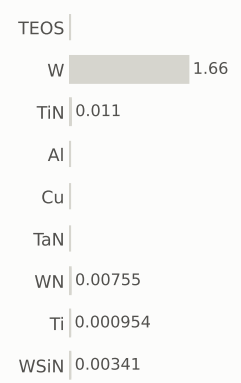

gases emitted (g)

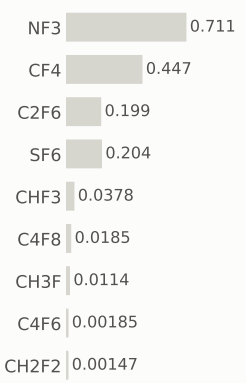

Step #2140: Wafer_clean

clean · Wafer_clean

0.169	170.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

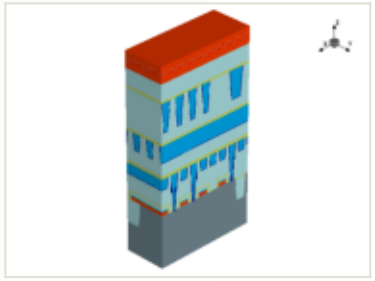

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

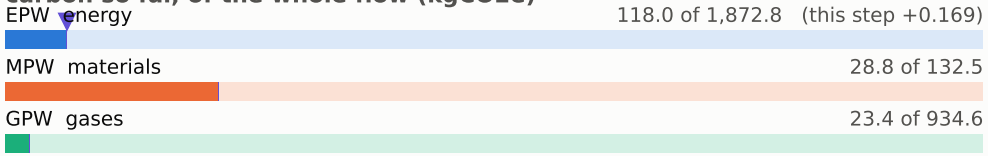

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

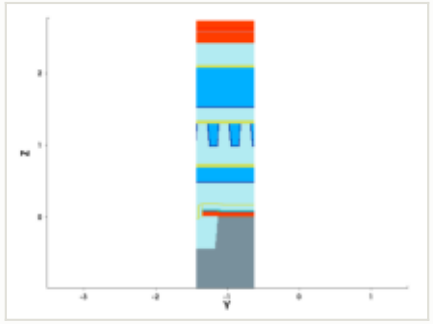

y cut at -1.035 µm

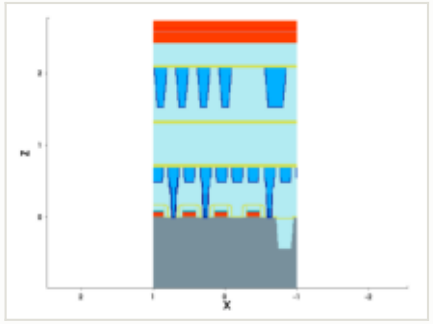

mask for this step

no mask for this step

steps by process area

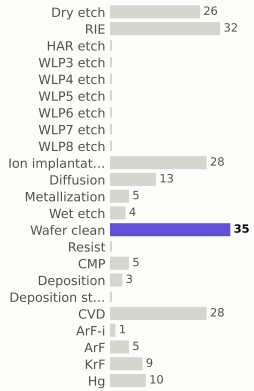

materials deposited (g)

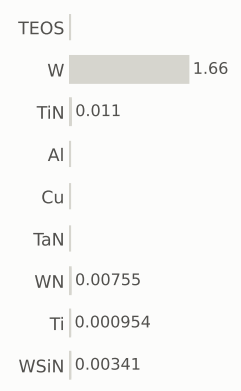

gases emitted (g)

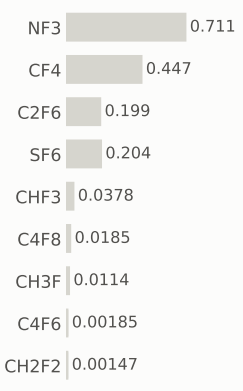

Step #2150: CVD

depo_isotropic · CVD

1.31	171.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

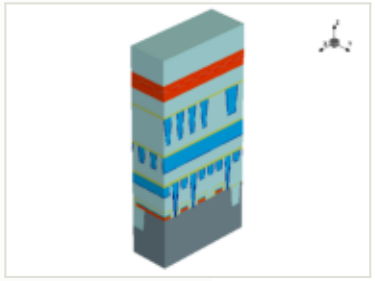

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.5 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

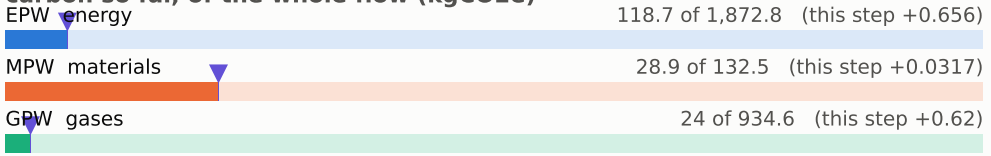

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

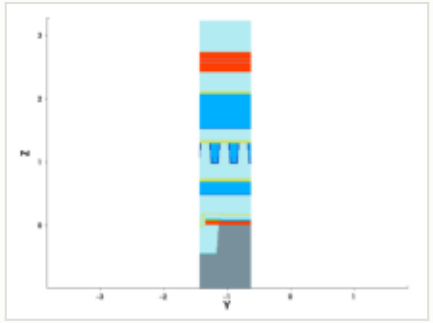

y cut at -1.035 µm

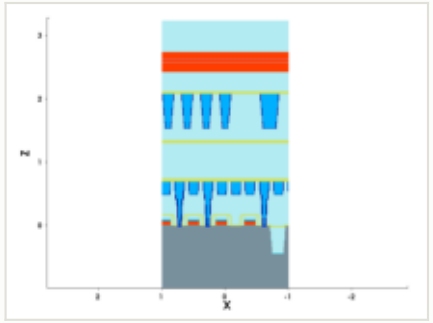

mask for this step

no mask for this step

steps by process area

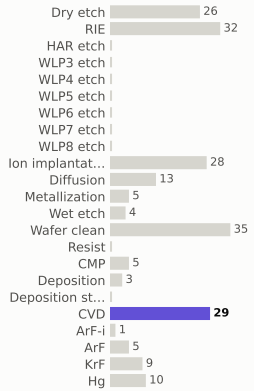

materials deposited (g)

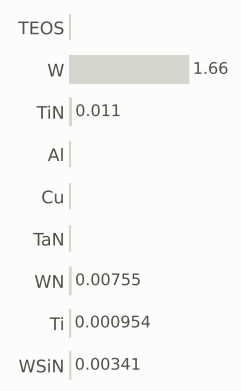

gases emitted (g)

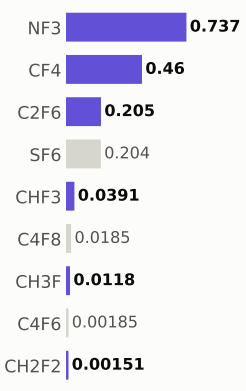

Step #2160: CMP

etch_cmp · CMP

0.169	171.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

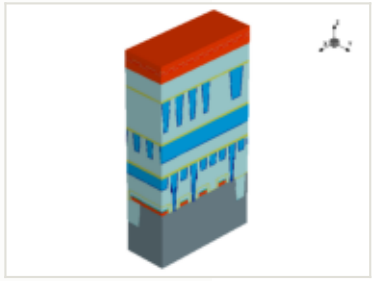

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

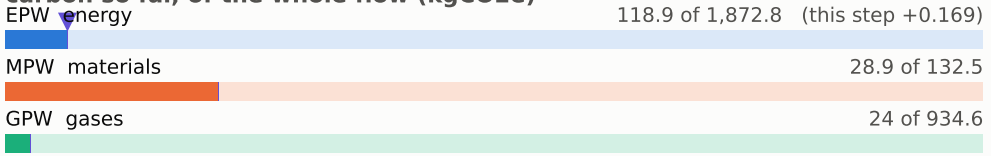

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

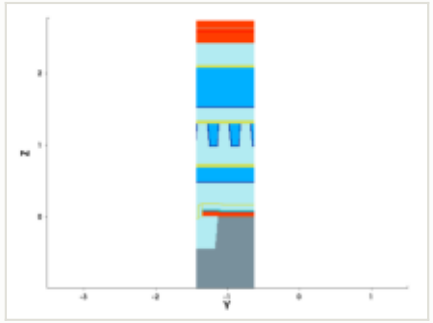

y cut at -1.035 µm

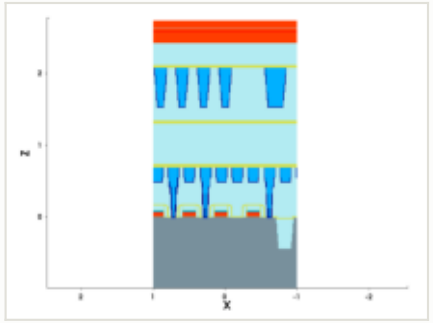

mask for this step

no mask for this step

steps by process area

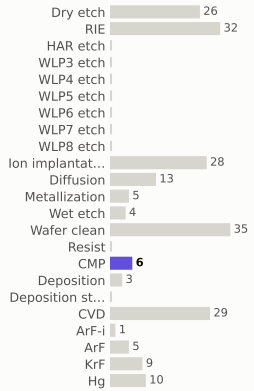

materials deposited (g)

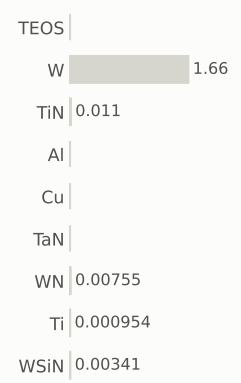

gases emitted (g)

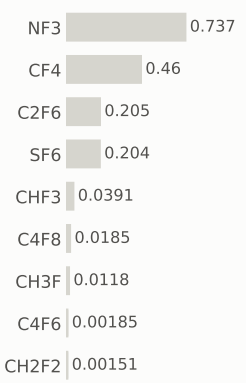

Step #2170: Wafer_clean

clean · Wafer_clean

0.169	171.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

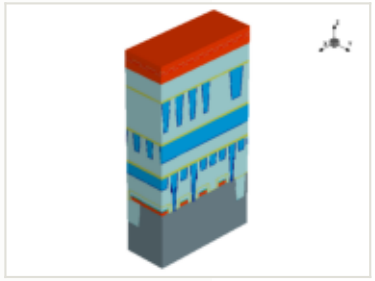

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

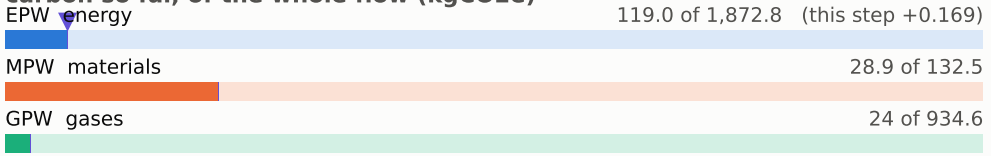

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

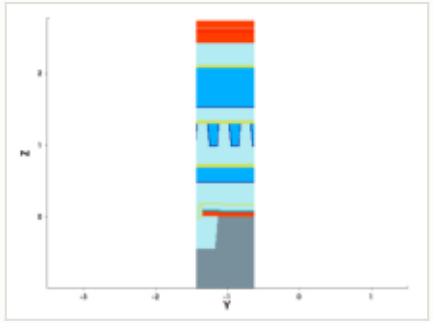

y cut at -1.035 µm

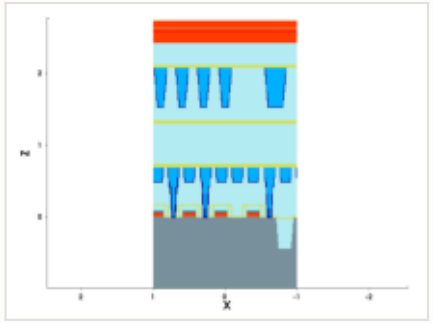

mask for this step

no mask for this step

steps by process area

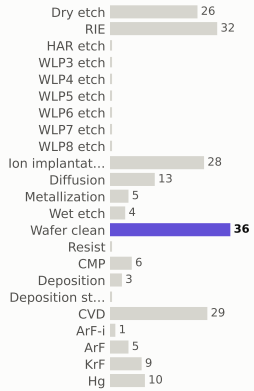

materials deposited (g)

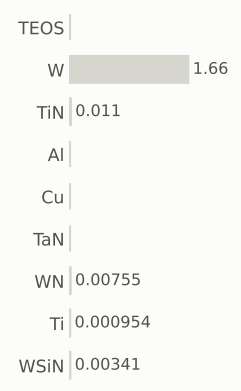

gases emitted (g)

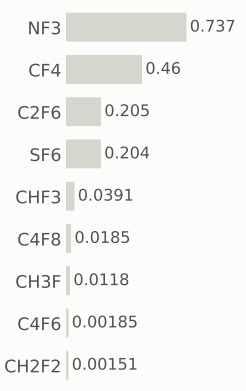

Step #2180: Wafer_clean

clean · Wafer_clean

0.169	172.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

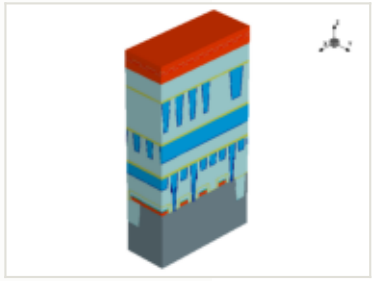

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

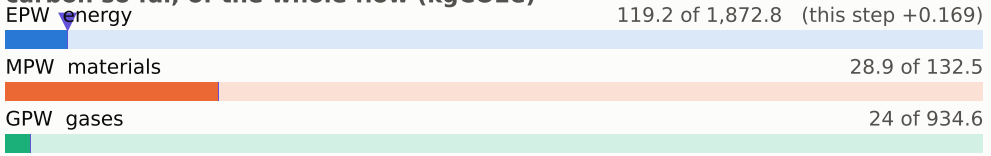

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

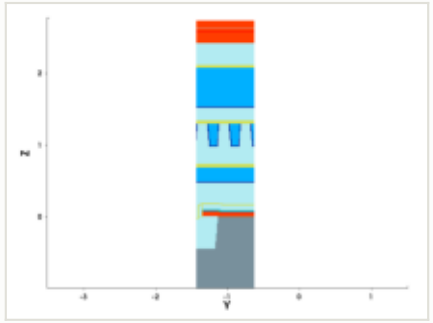

y cut at -1.035 µm

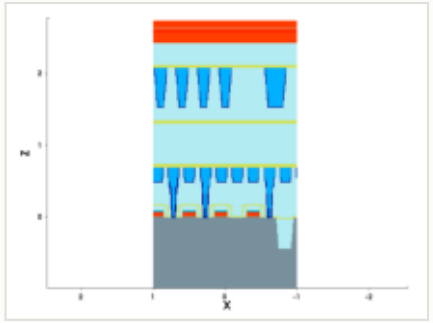

mask for this step

no mask for this step

steps by process area

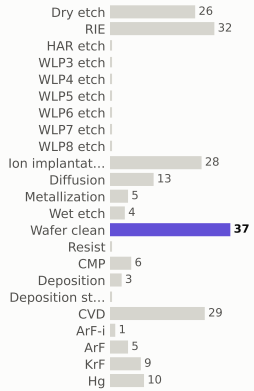

materials deposited (g)

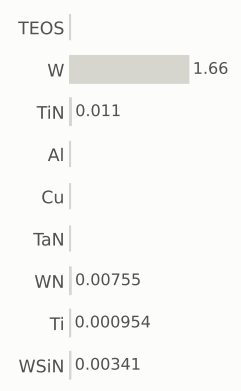

gases emitted (g)

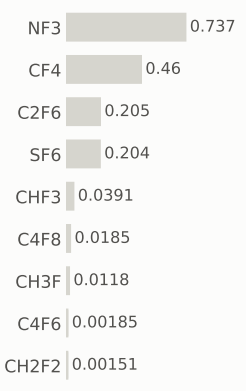

Step #2190: CVD

depo_isotropic · CVD

1.31	173.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

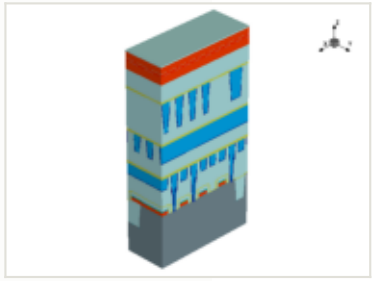

this step

process area	CVD
material	—
thickness	0.025 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

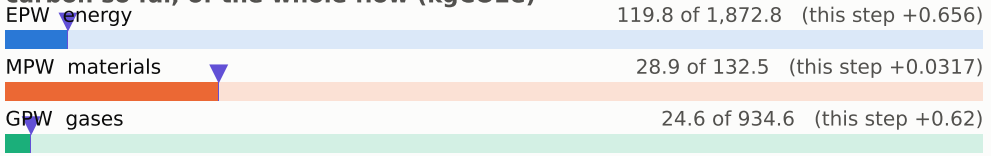

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

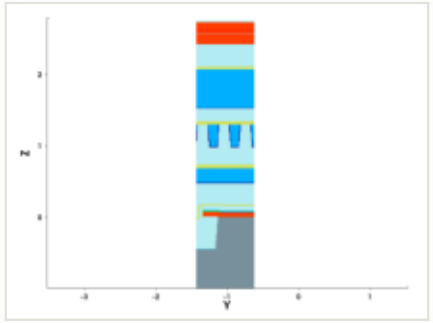

y cut at -1.035 µm

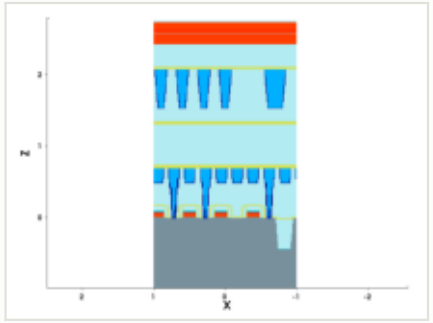

mask for this step

no mask for this step

steps by process area

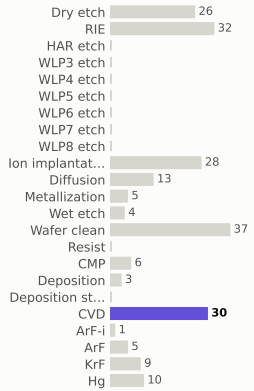

materials deposited (g)

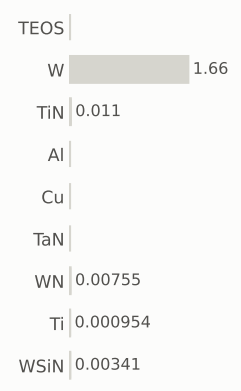

gases emitted (g)

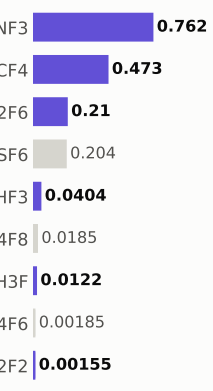

Step #2200: ArF

litho_patterning · ArF

0.199	173.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

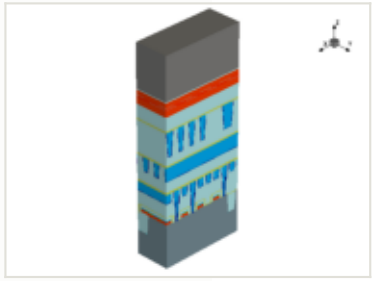

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

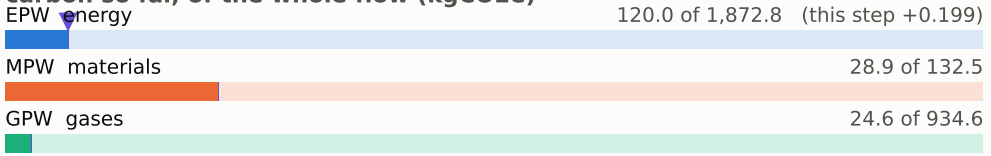

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

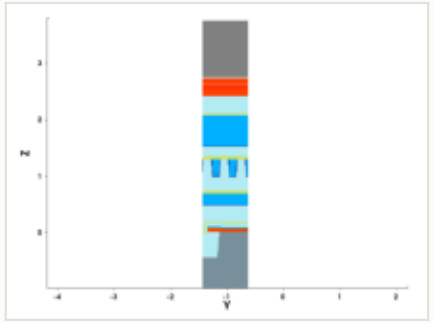

y cut at -1.035 µm

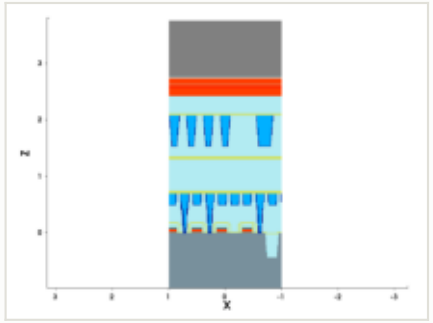

mask: layer 26:0 (OASIS)

nothing in the clip window

steps by process area



materials deposited (g)

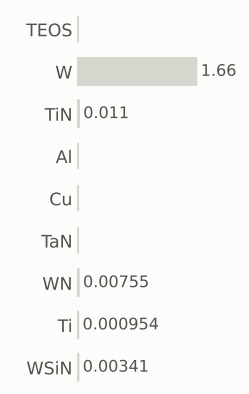

gases emitted (g)

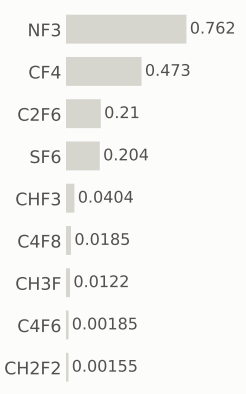

Step #2210: RIE

etch_anisotropic · RIE

1.04	174.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

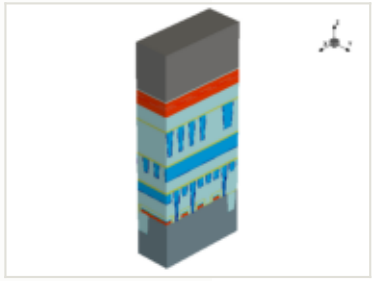

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

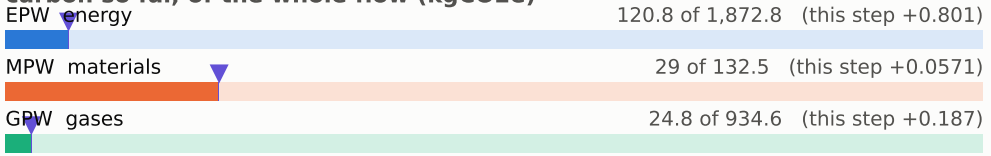

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

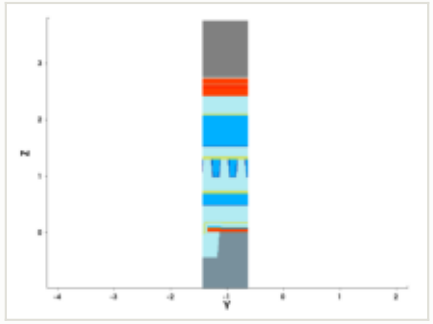

y cut at -1.035 µm

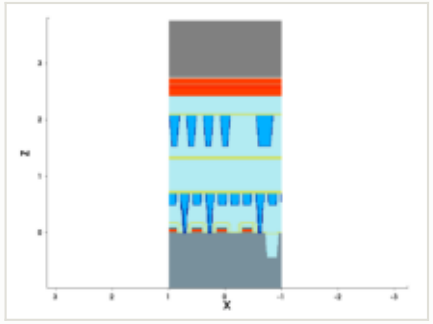

mask for this step

no mask for this step

steps by process area



materials deposited (g)

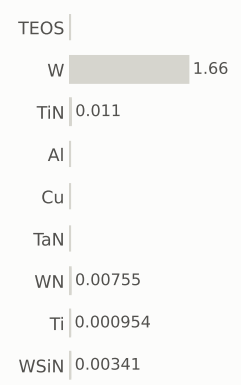

gases emitted (g)

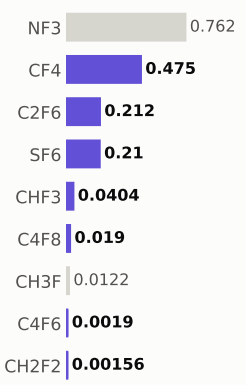

Step #2220: RIE

etch_anisotropic · RIE

1.04	175.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

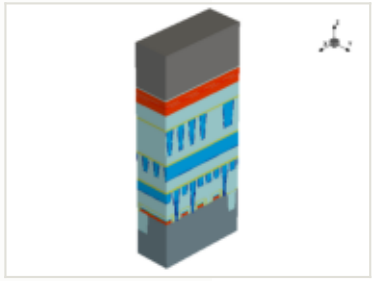

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

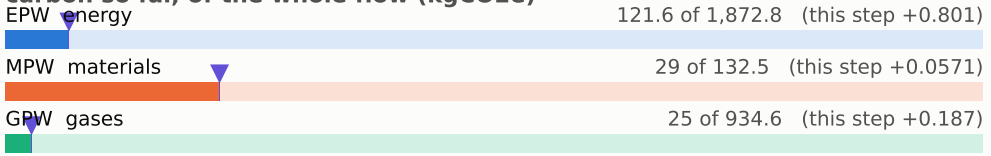

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

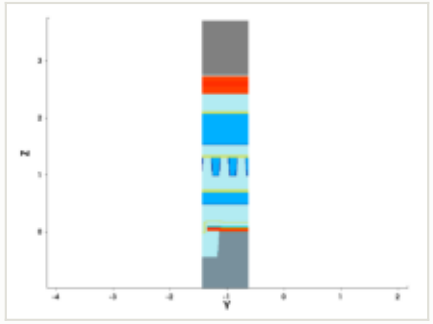

y cut at -1.035 µm

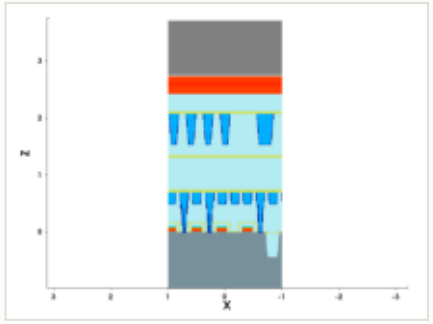

mask for this step

no mask for this step

steps by process area

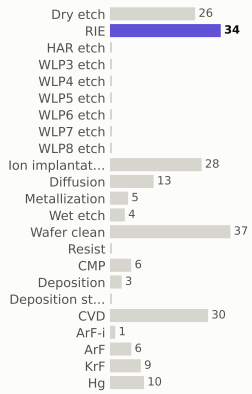

materials deposited (g)

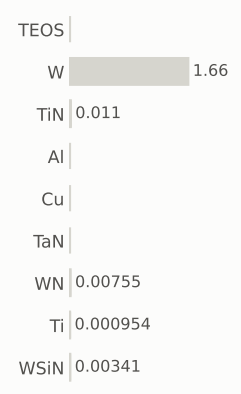

gases emitted (g)

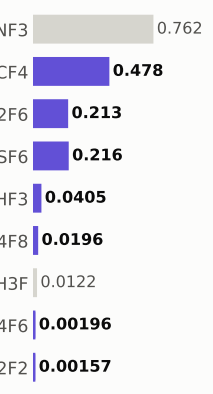

Step #2230: Dry_etch

etch_strip · Dry_etch

0.801	176.4	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

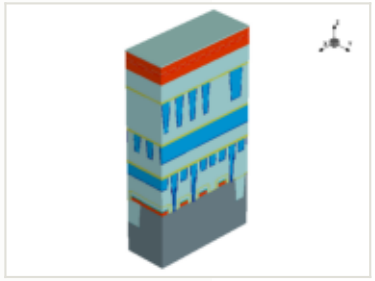

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

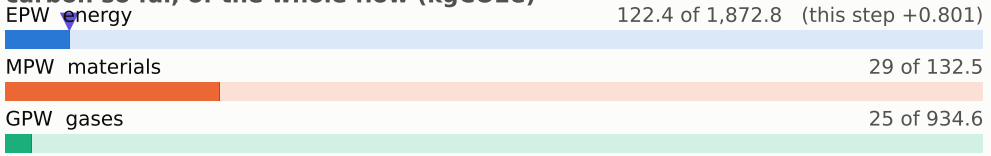

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

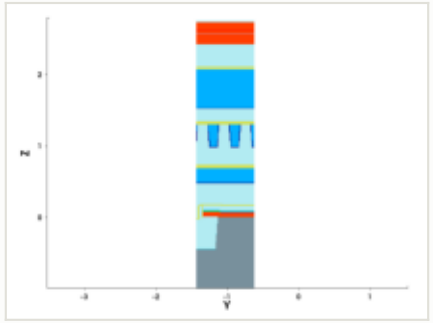

y cut at -1.035 µm

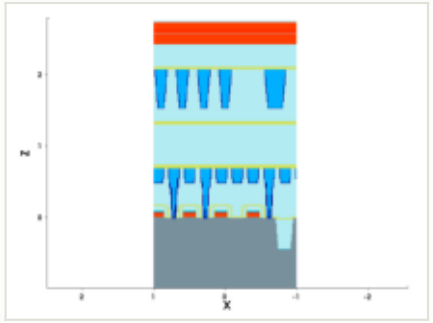

mask for this step

no mask for this step

steps by process area

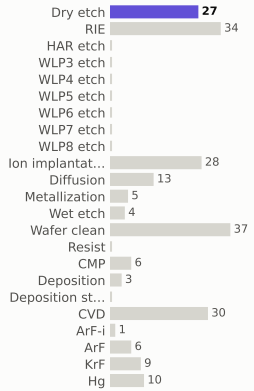

materials deposited (g)

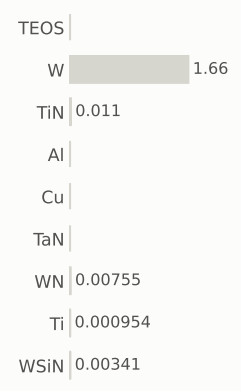

gases emitted (g)

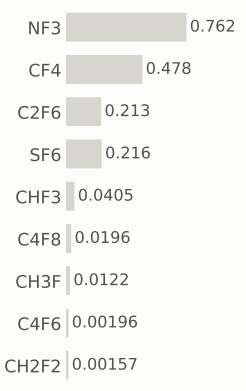

Step #2240: Wafer_clean

clean · Wafer_clean

0.169	176.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

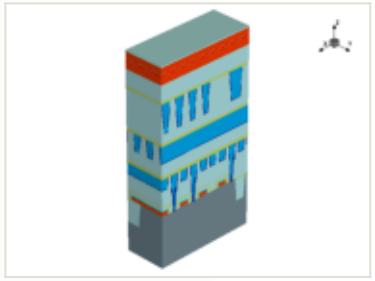

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

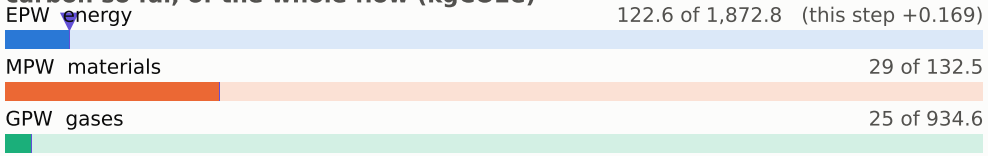

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

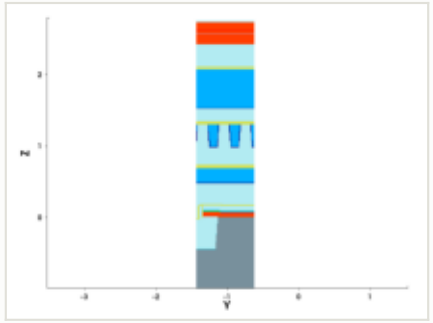

y cut at -1.035 µm

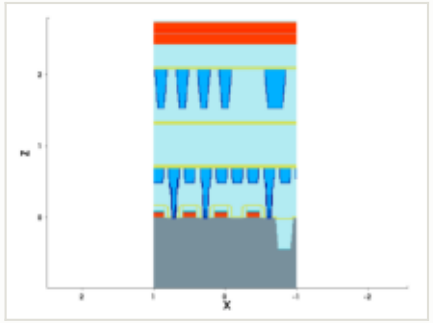

mask for this step

no mask for this step

steps by process area

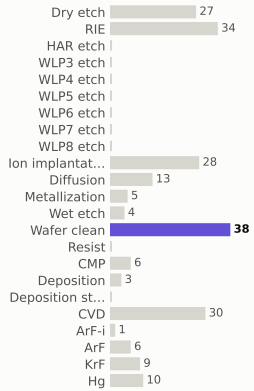

materials deposited (g)

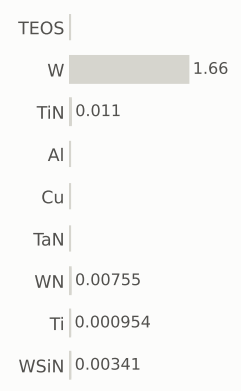

gases emitted (g)

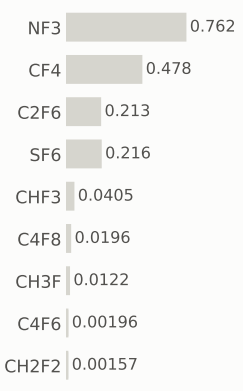

Step #2250: CVD

depo_isotropic · CVD

1.31	177.9	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

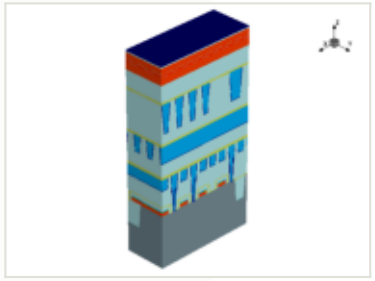

this step

process area	CVD
material	TiN
thickness	0.015 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.032 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

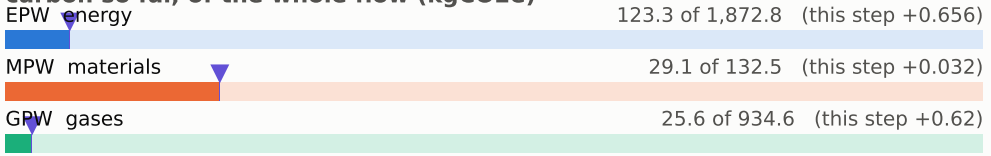

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

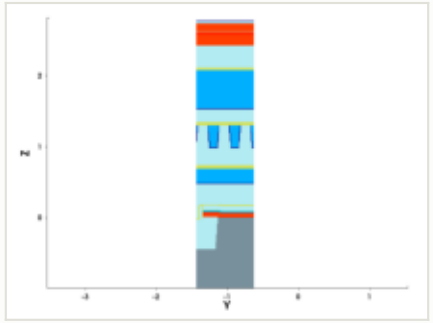

y cut at -1.035 µm

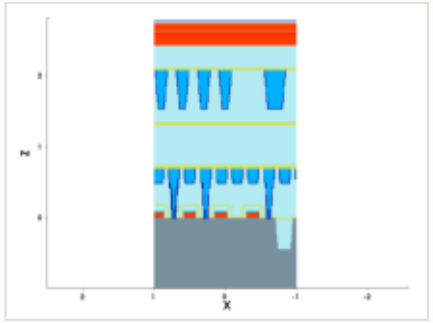

mask for this step

no mask for this step

steps by process area

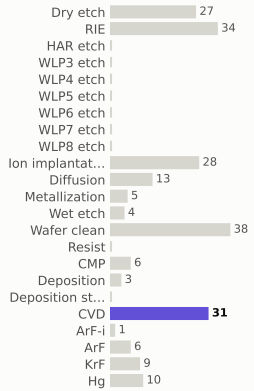

materials deposited (g)

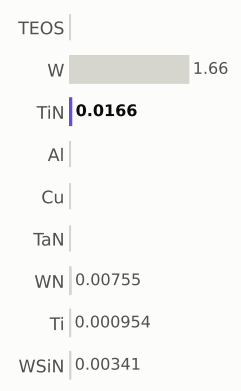

gases emitted (g)

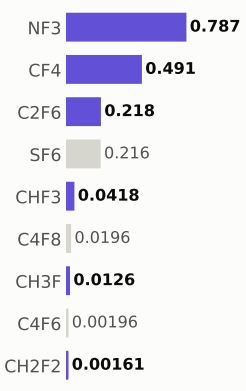

Step #2260: Metallization

depo_isotropic · Metallization

1.24	179.2	0.042%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

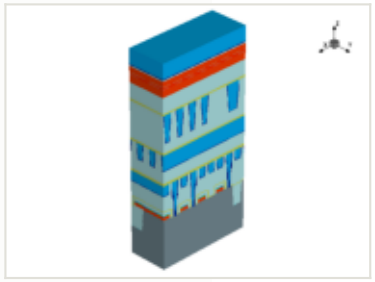

this step

process area	Metallization
material	W
thickness	0.3 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.031 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.24 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

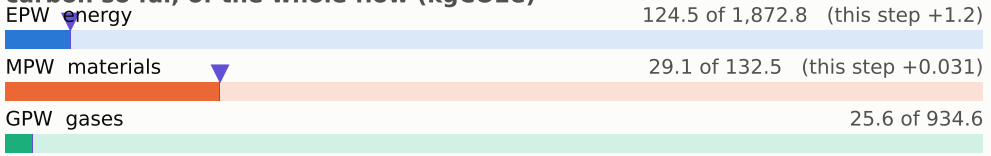

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

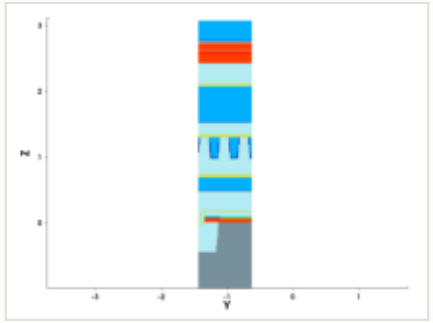

y cut at -1.035 µm

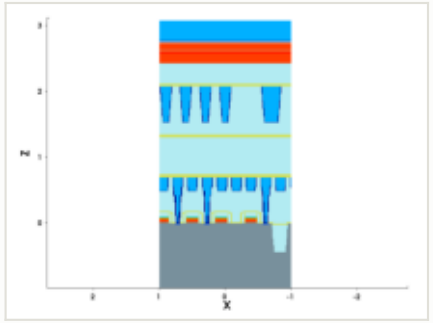

mask for this step

no mask for this step

steps by process area



materials deposited (g)

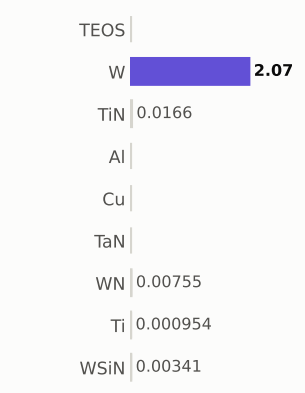

gases emitted (g)

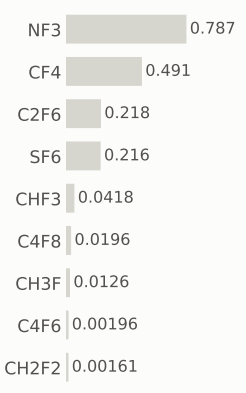

Step #2270: CMP

etch_cmp · CMP

0.169	179.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

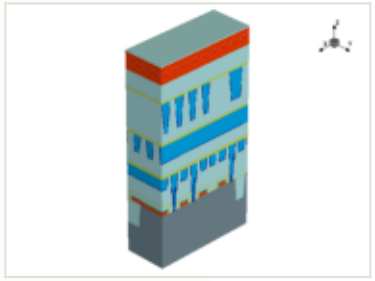

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

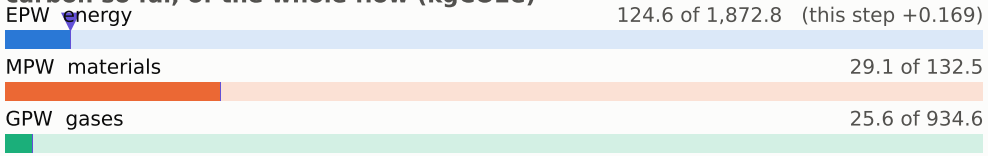

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

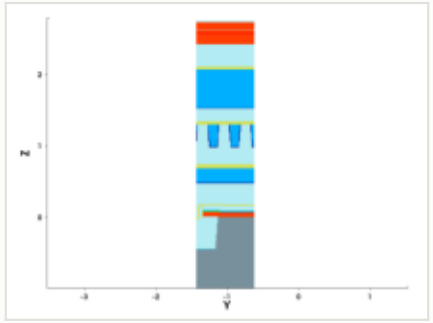

y cut at -1.035 µm

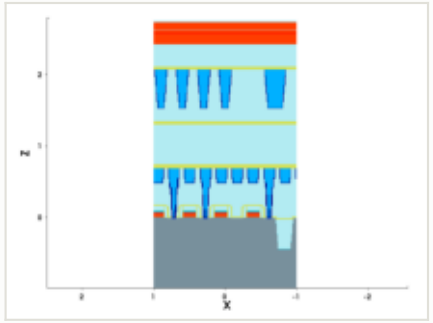

mask for this step

no mask for this step

steps by process area



materials deposited (g)

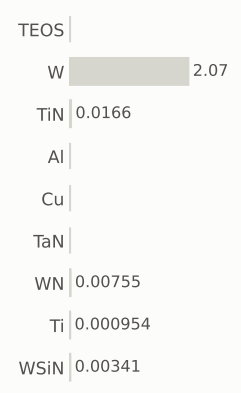

gases emitted (g)

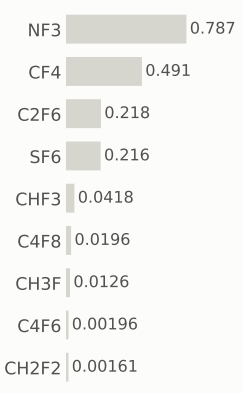

Step #2280: Wafer_clean

clean · Wafer_clean

0.169	179.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

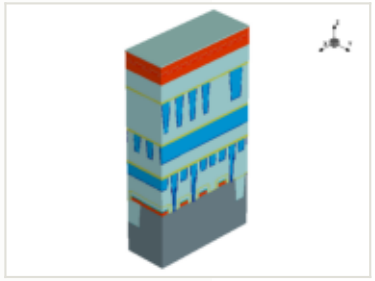

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

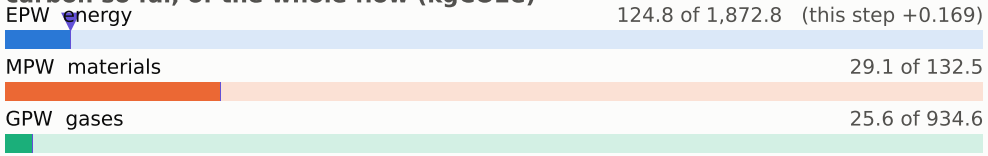

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

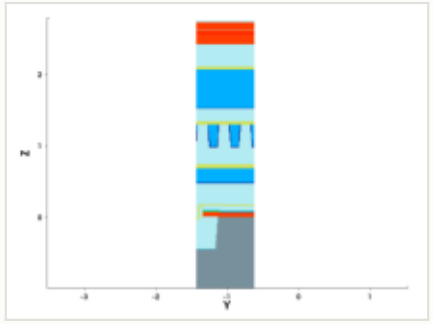

y cut at -1.035 µm

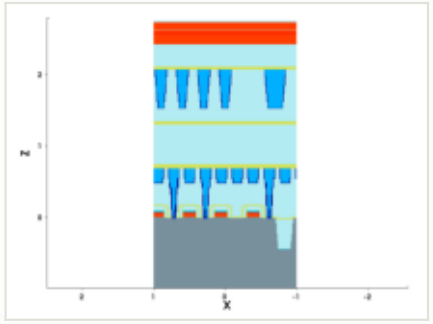

mask for this step

no mask for this step

steps by process area



materials deposited (g)

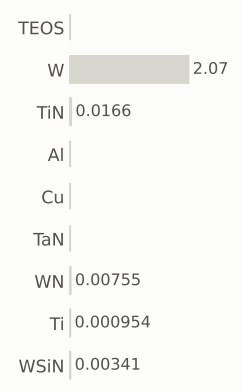

gases emitted (g)

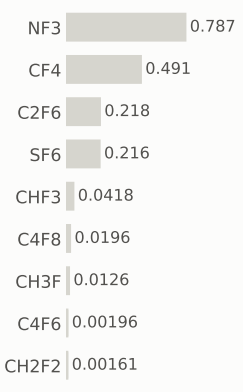

Step #2290: CVD

depo_isotropic · CVD

1.31	180.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

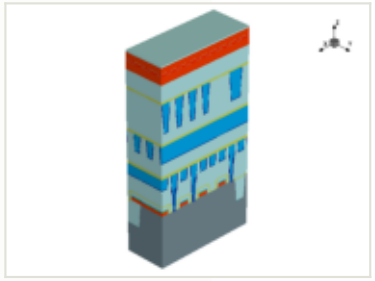

this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

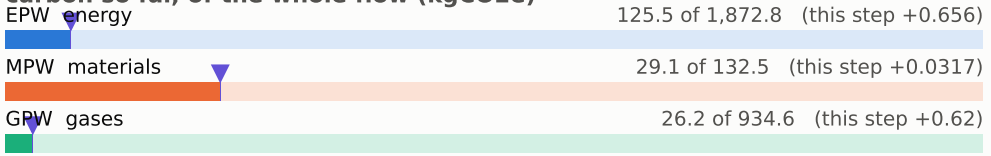

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

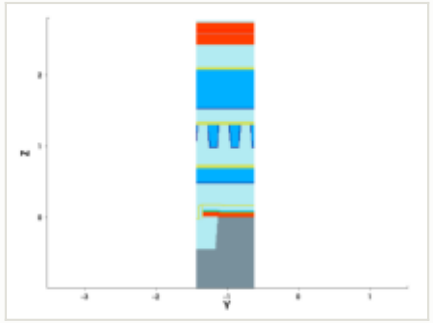

y cut at -1.035 µm

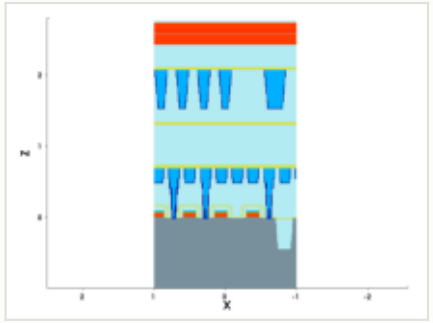

mask for this step

no mask for this step

steps by process area

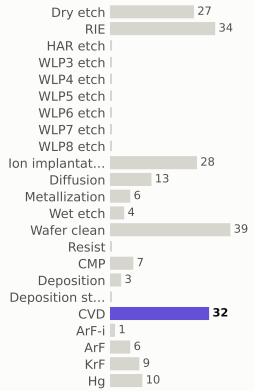

materials deposited (g)

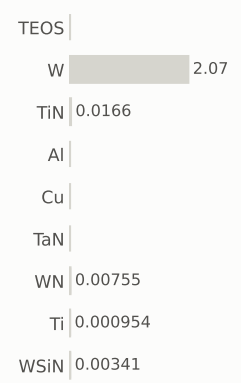

gases emitted (g)



Step #2310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	181.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

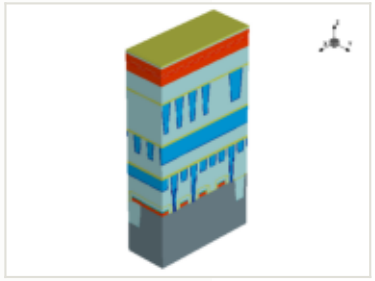

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

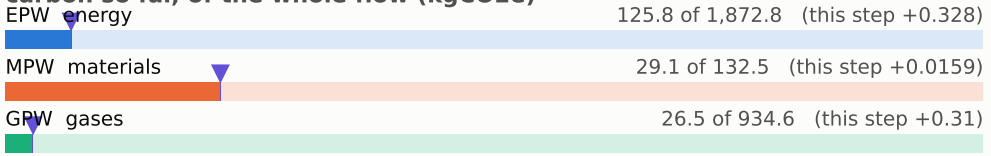

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

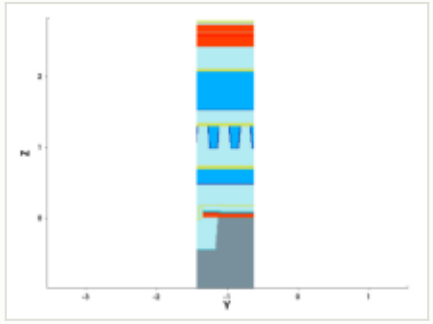

y cut at -1.035 µm

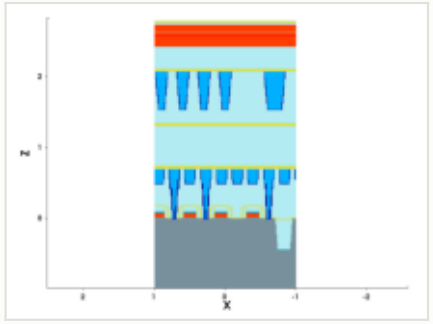

mask for this step

no mask for this step

steps by process area

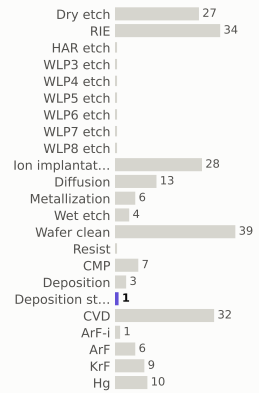

materials deposited (g)

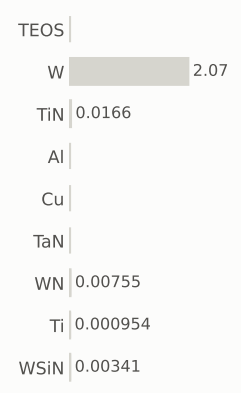

gases emitted (g)

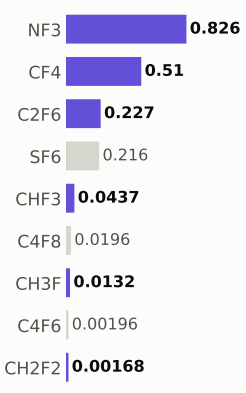

Step #2320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	182.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

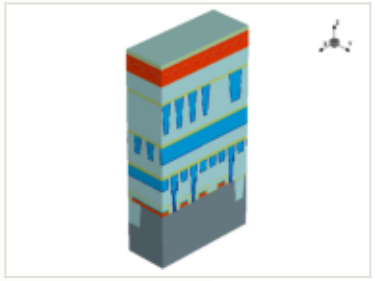

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

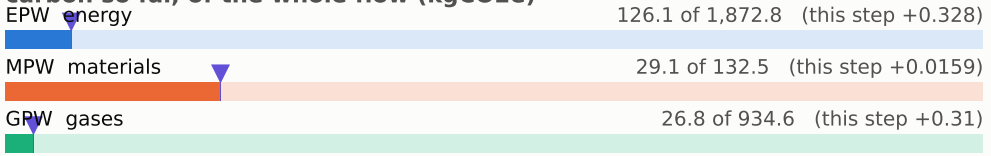

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

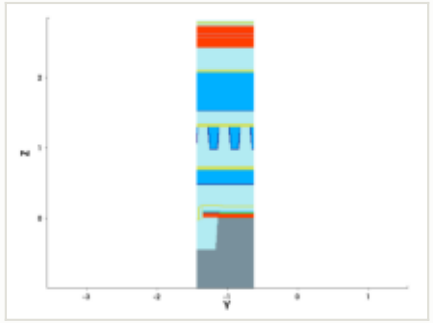

y cut at -1.035 µm

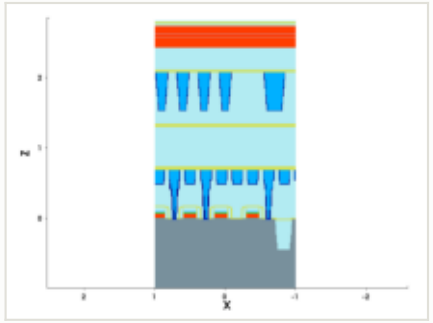

mask for this step

no mask for this step

steps by process area

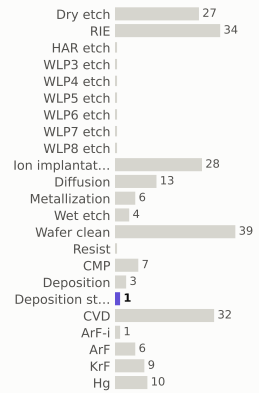

materials deposited (g)

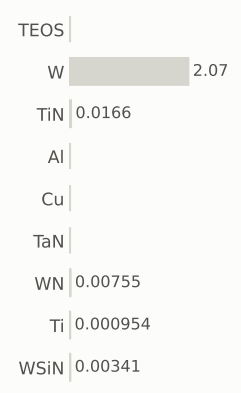

gases emitted (g)

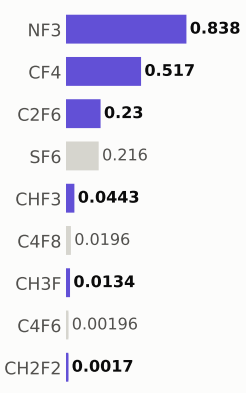

Step #2330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	182.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

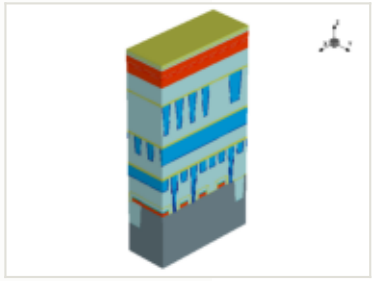

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

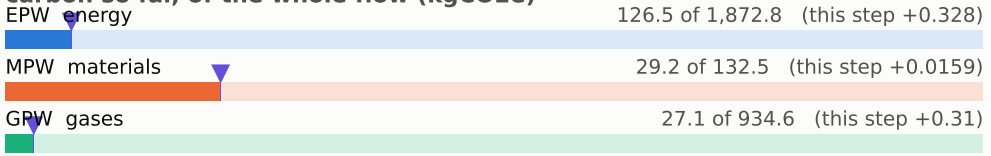

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

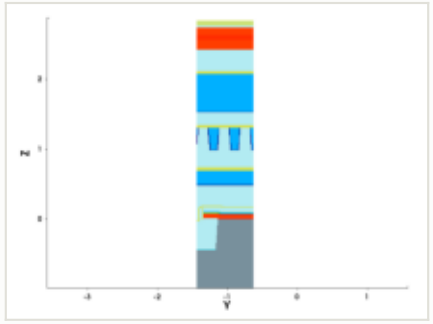

y cut at -1.035 µm

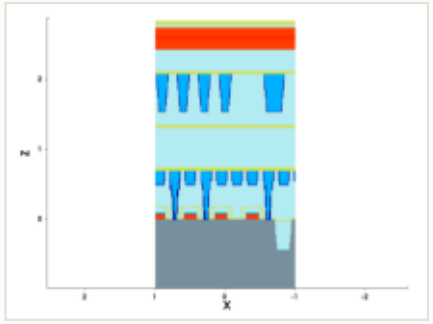

mask for this step

no mask for this step

steps by process area

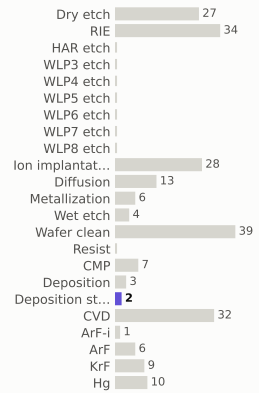

materials deposited (g)

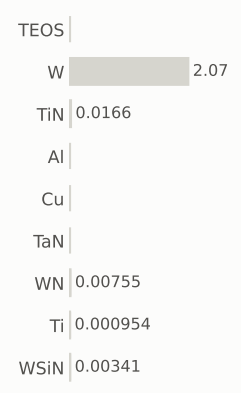

gases emitted (g)

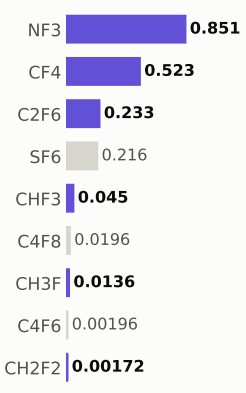

Step #2340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	183.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

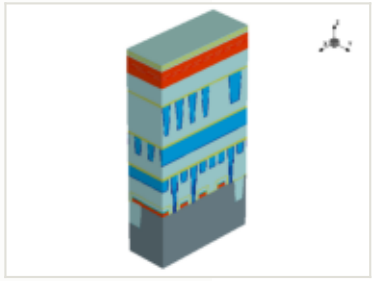

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

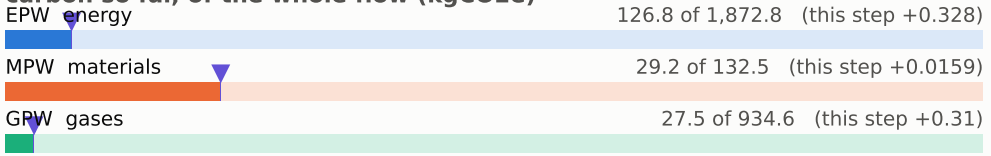

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

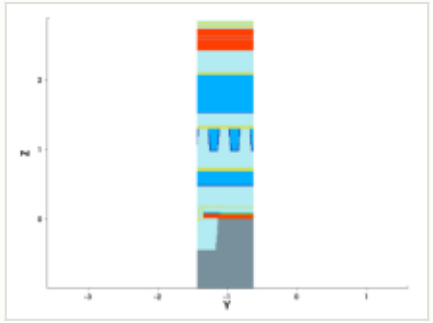

y cut at -1.035 µm

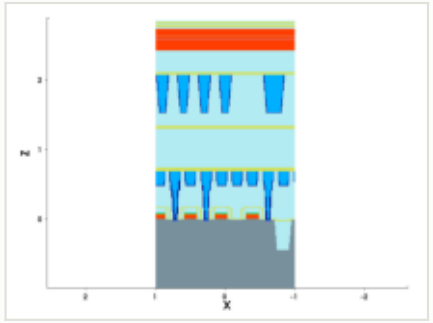

mask for this step

no mask for this step

steps by process area

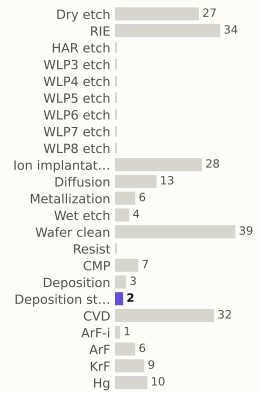

materials deposited (g)

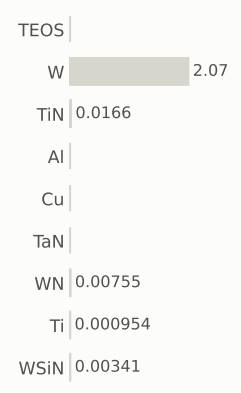

gases emitted (g)

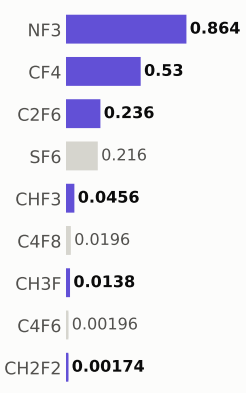

Step #2350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	184.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

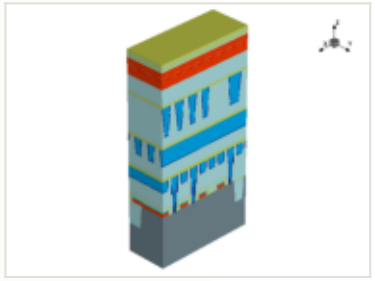

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

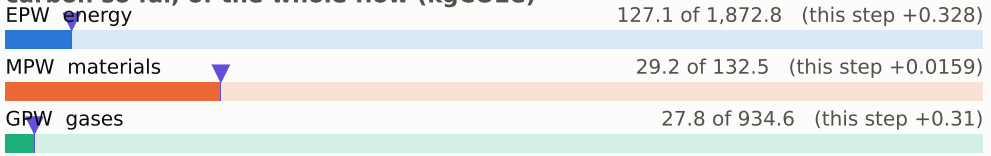

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

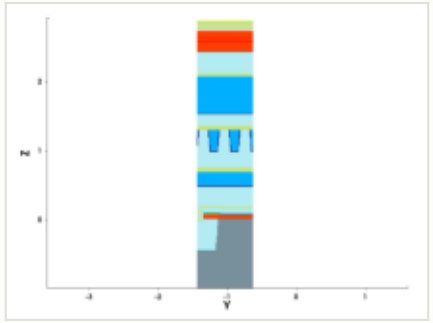

y cut at -1.035 µm

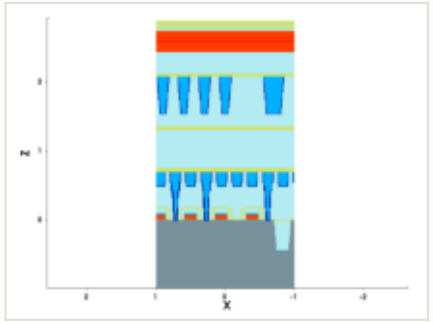

mask for this step

no mask for this step

steps by process area

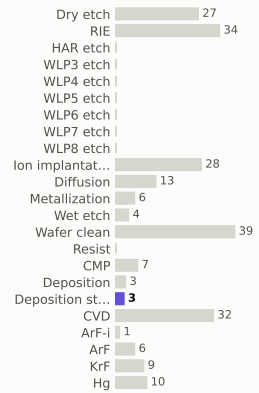

materials deposited (g)

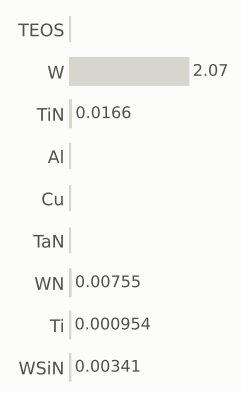

gases emitted (g)

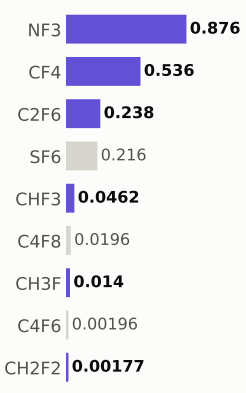

Step #2360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	184.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

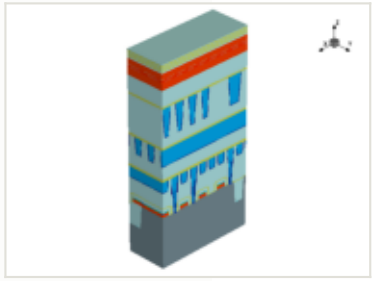

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

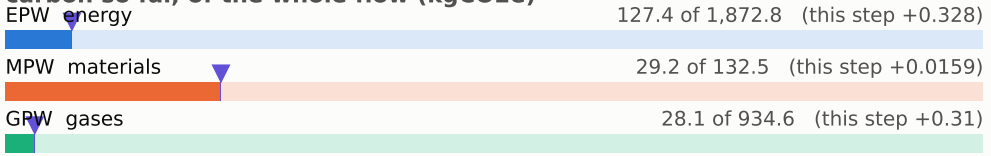

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

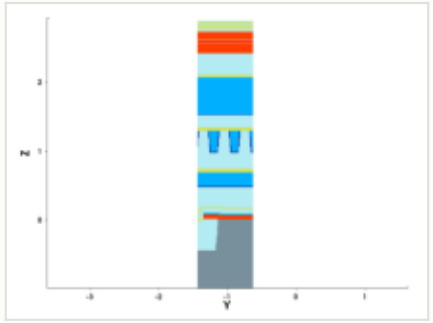

y cut at -1.035 µm

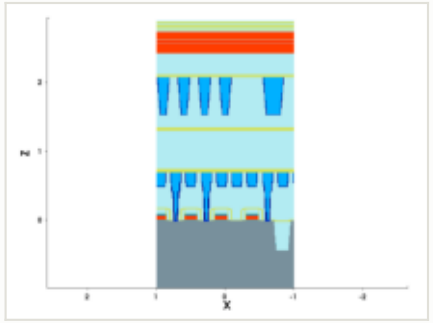

mask for this step

no mask for this step

steps by process area

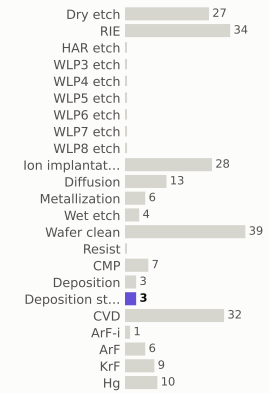

materials deposited (g)

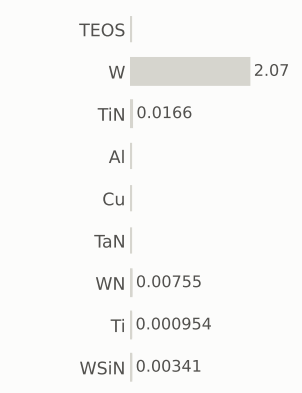

gases emitted (g)

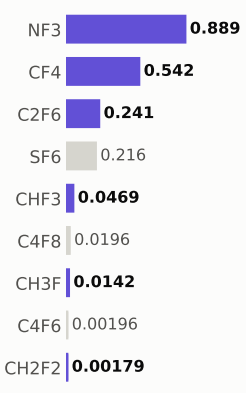

Step #2370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	185.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

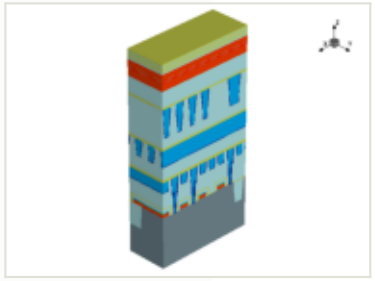

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

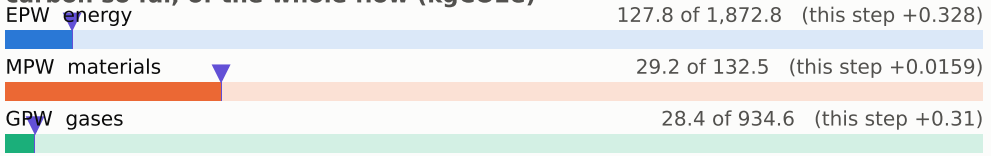

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

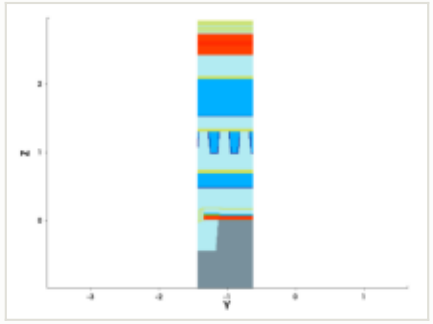

y cut at -1.035 µm

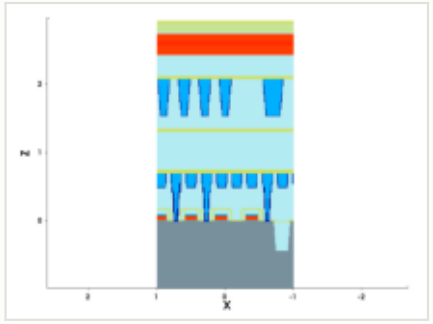

mask for this step

no mask for this step

steps by process area

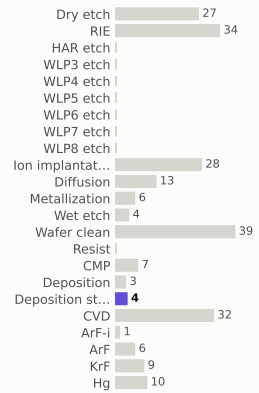

materials deposited (g)

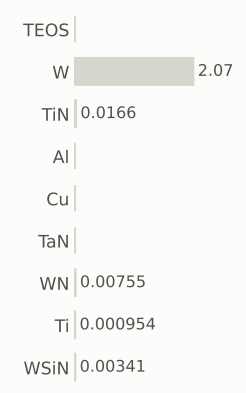

gases emitted (g)

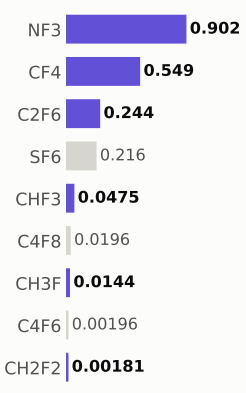

Step #2380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	186.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

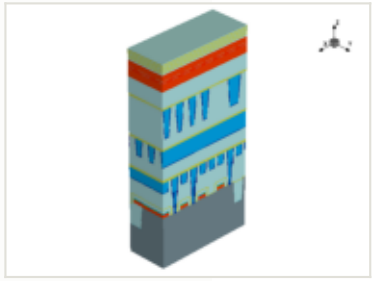

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

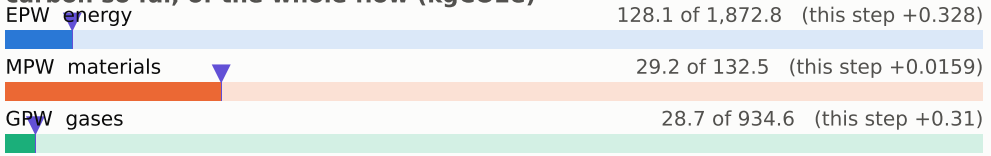

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

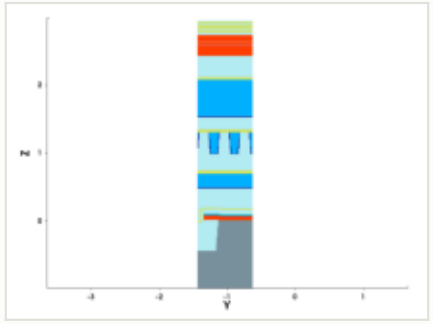

y cut at -1.035 µm

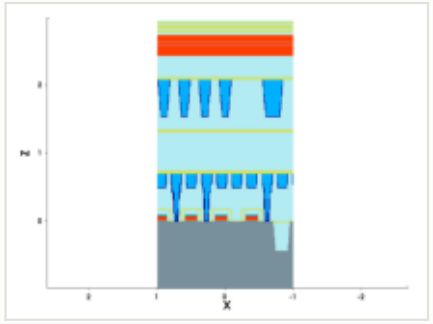

mask for this step

no mask for this step

steps by process area

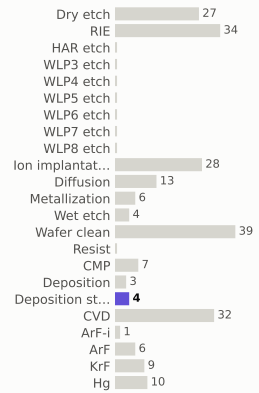

materials deposited (g)

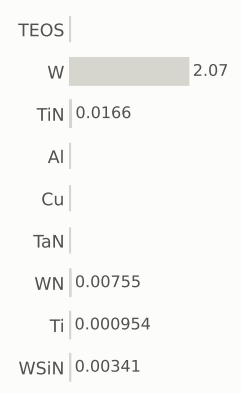

gases emitted (g)

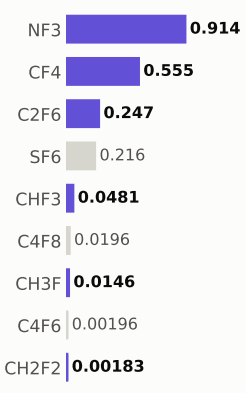

Step #2390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	186.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

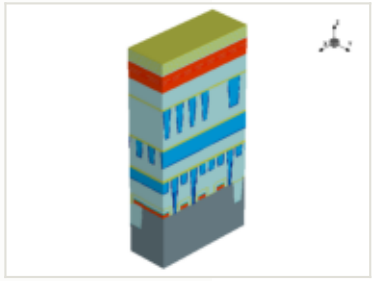

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

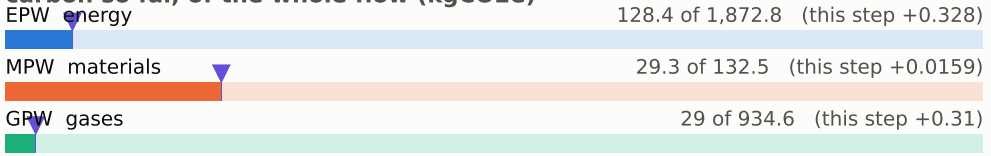

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

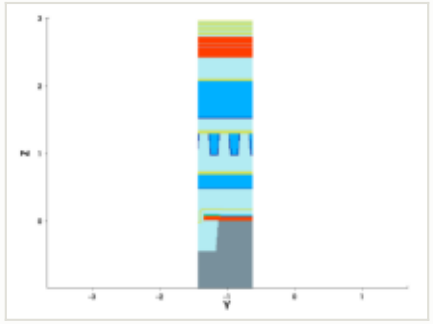

y cut at -1.035 µm

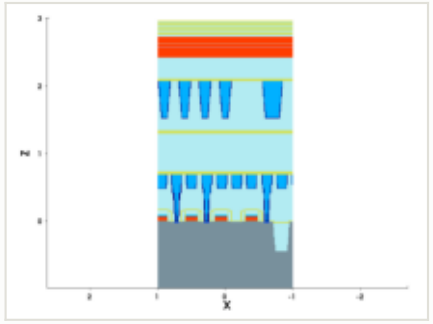

mask for this step

no mask for this step

steps by process area

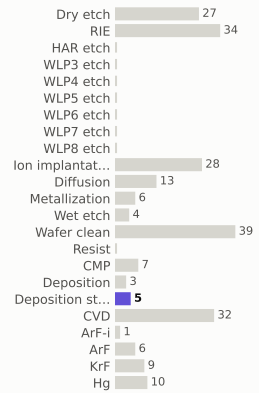

materials deposited (g)

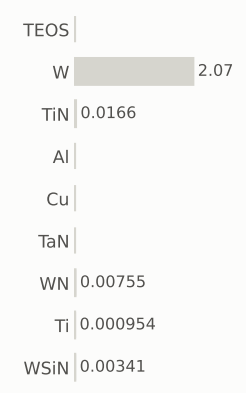

gases emitted (g)

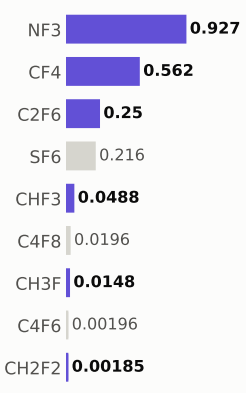

Step #2400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	187.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

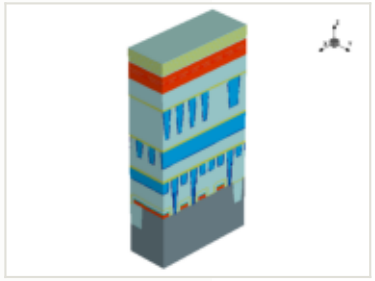

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

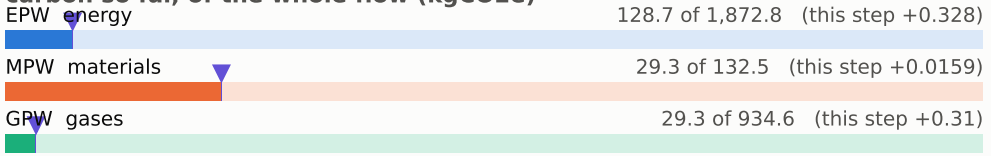

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

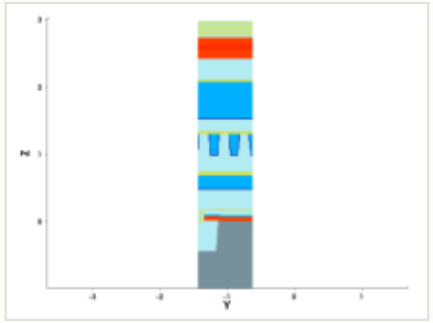

y cut at -1.035 µm

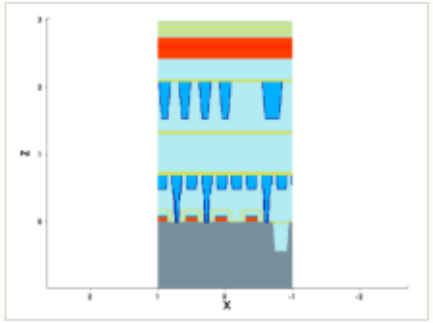

mask for this step

no mask for this step

steps by process area

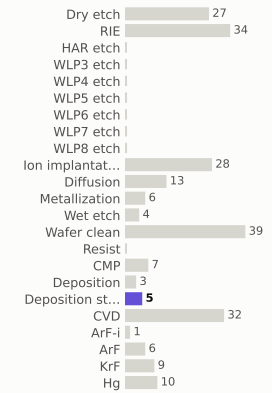

materials deposited (g)

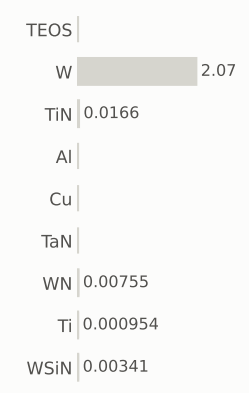

gases emitted (g)

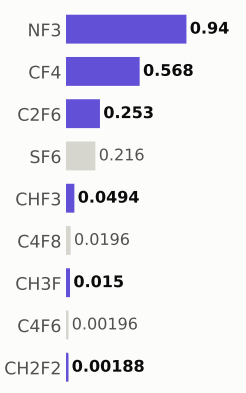

Step #2410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	188.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

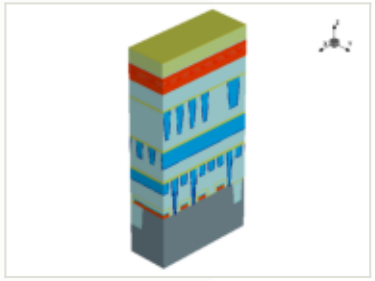

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

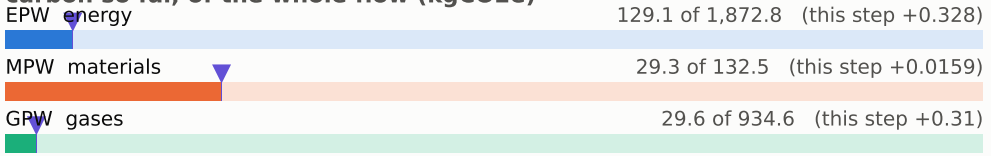

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

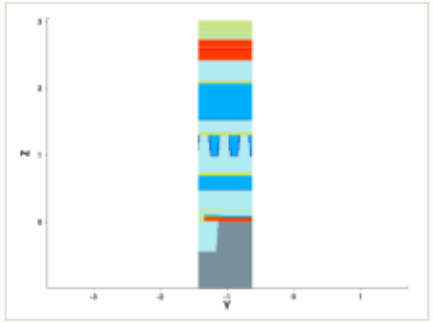

y cut at -1.035 µm

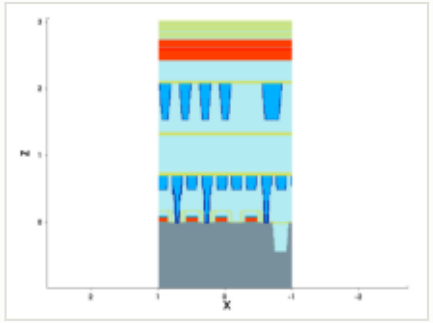

mask for this step

no mask for this step

steps by process area

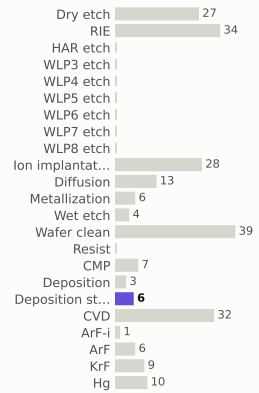

materials deposited (g)

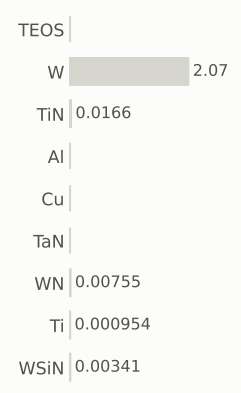

gases emitted (g)

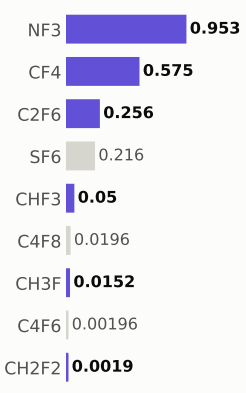

Step #2420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	188.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

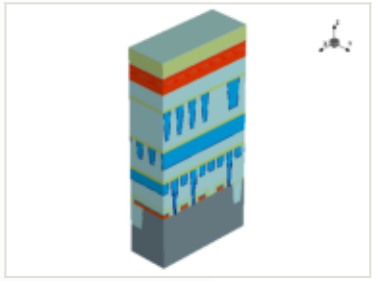

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

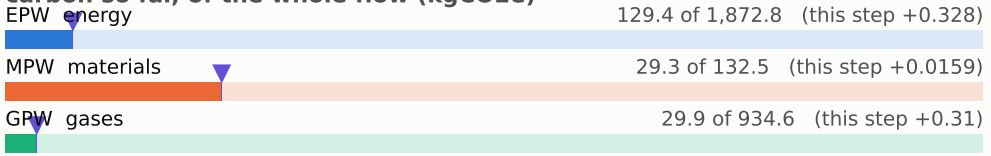

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

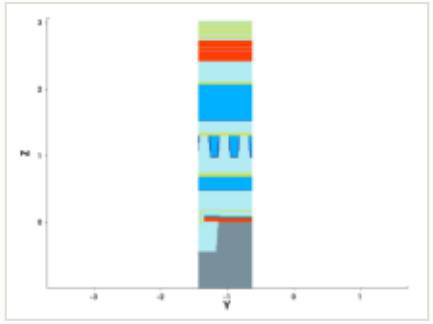

y cut at -1.035 µm

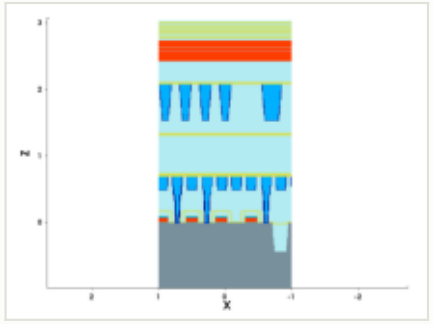

mask for this step

no mask for this step

steps by process area

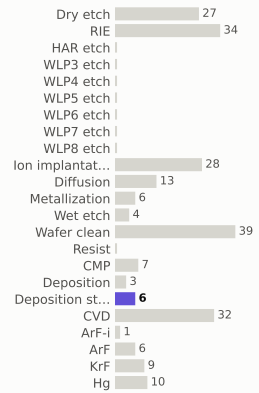

materials deposited (g)

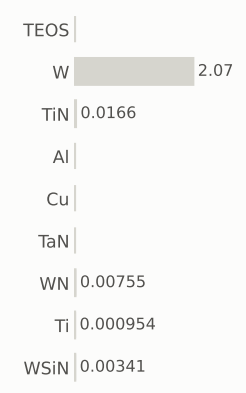

gases emitted (g)

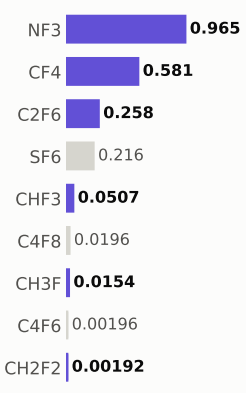

Step #2430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	189.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

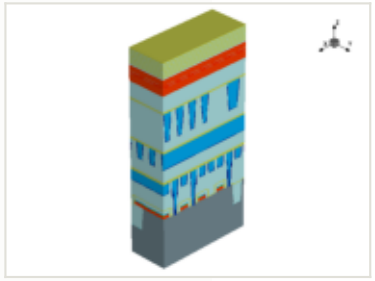

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

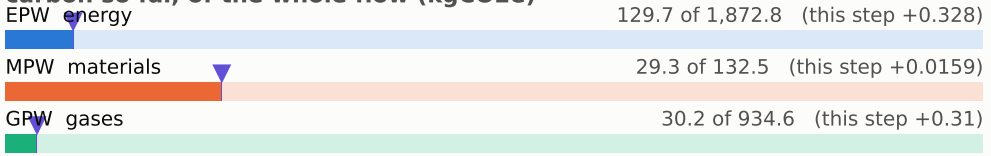

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

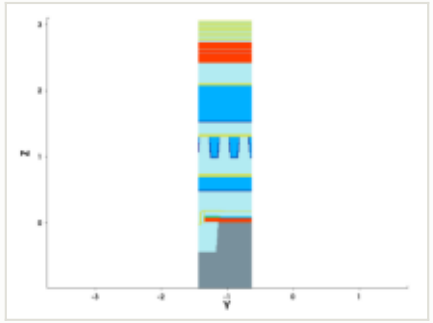

y cut at -1.035 µm

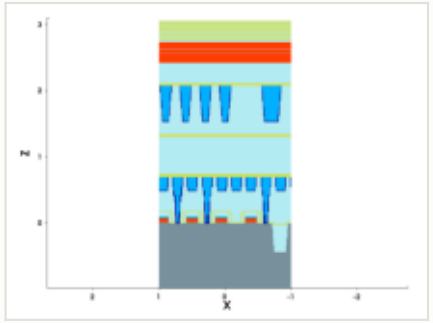

mask for this step

no mask for this step

steps by process area

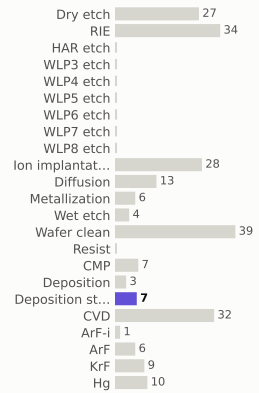

materials deposited (g)

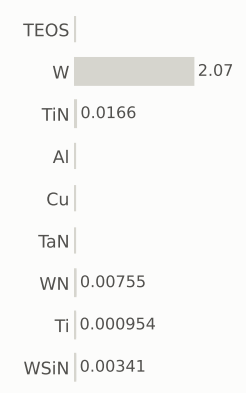

gases emitted (g)

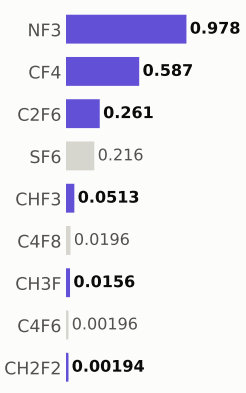

Step #2440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	190.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

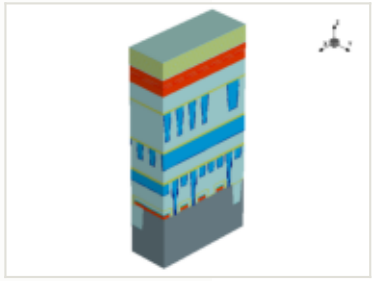

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

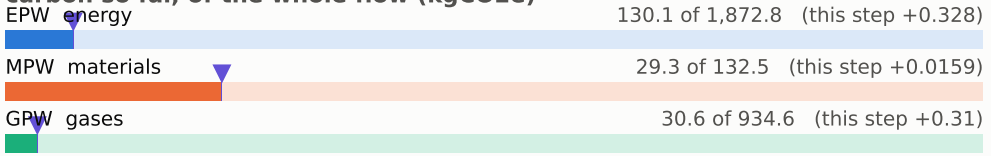

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

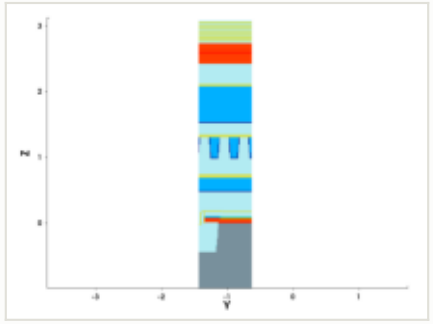

y cut at -1.035 µm

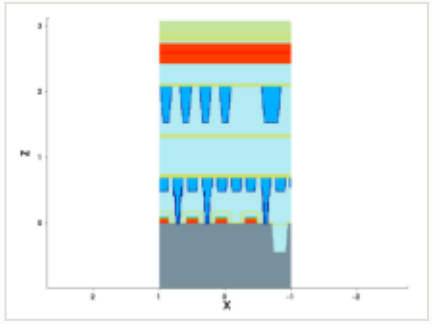

mask for this step

no mask for this step

steps by process area

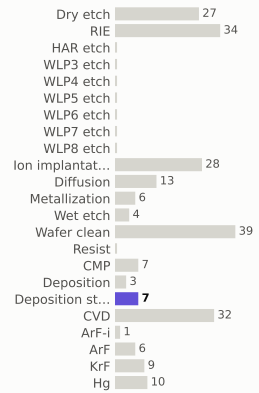

materials deposited (g)

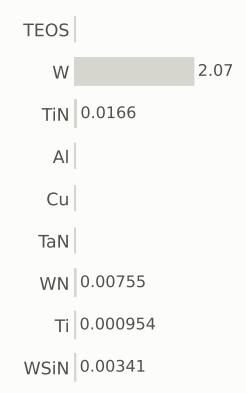

gases emitted (g)

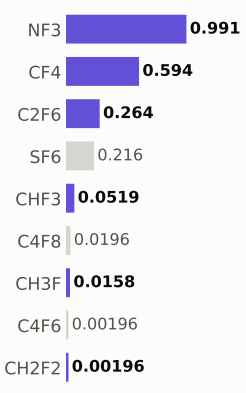

Step #2450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	190.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

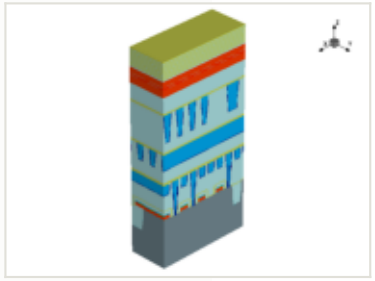

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

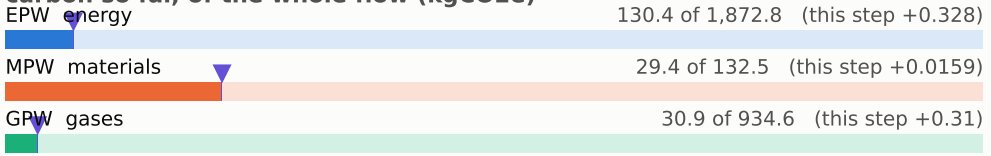

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

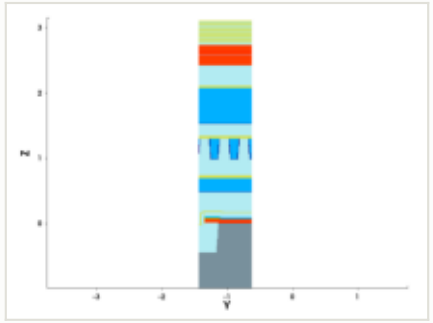

y cut at -1.035 µm

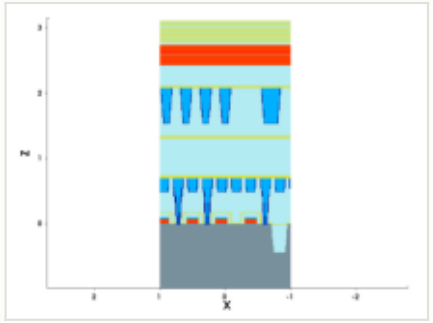

mask for this step

no mask for this step

steps by process area

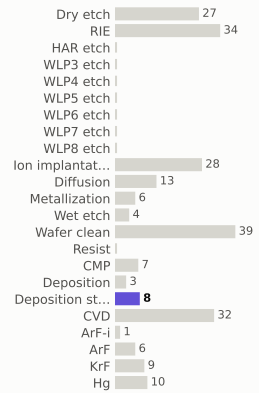

materials deposited (g)

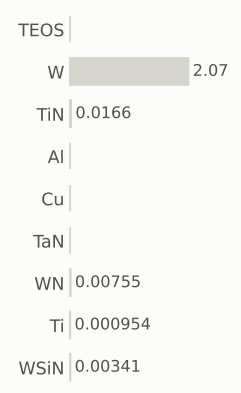

gases emitted (g)

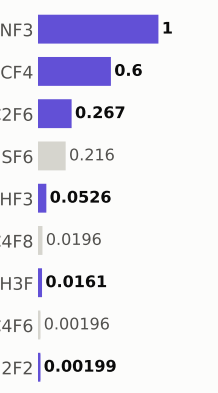

Step #2460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	191.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

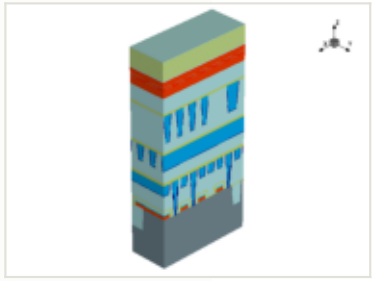

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

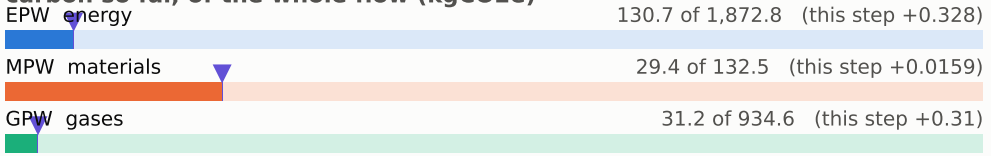

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

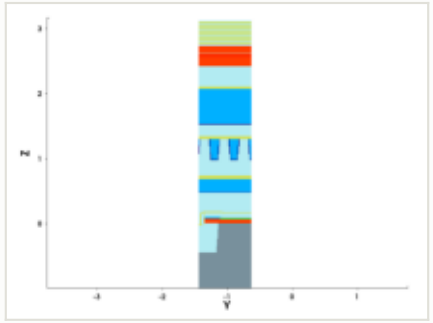

y cut at -1.035 µm

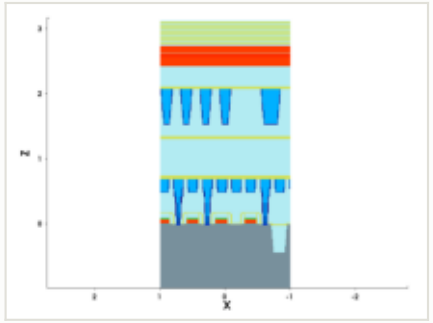

mask for this step

no mask for this step

steps by process area

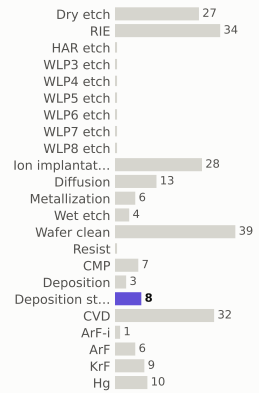

materials deposited (g)

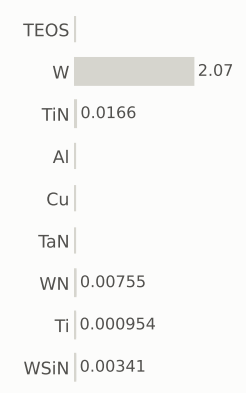

gases emitted (g)

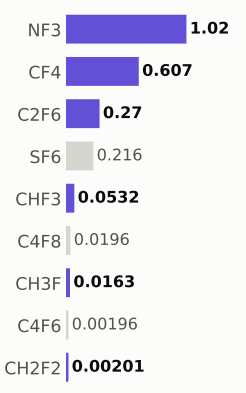

Step #2470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	191.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

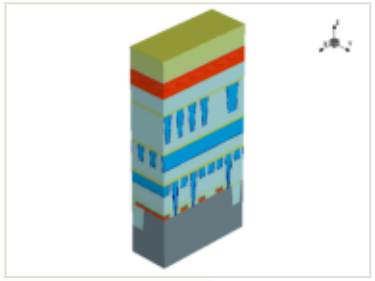

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

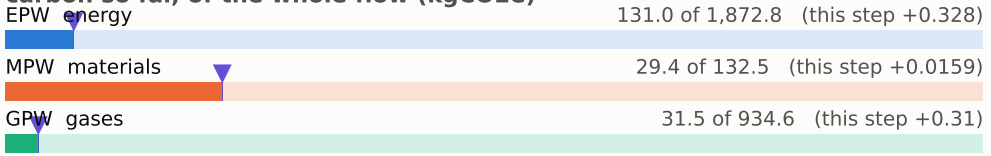

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

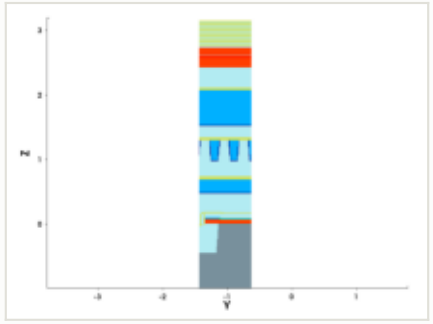

y cut at -1.035 µm

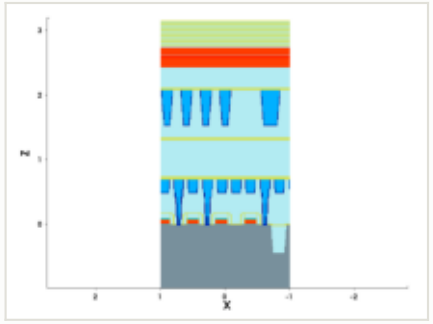

mask for this step

no mask for this step

steps by process area

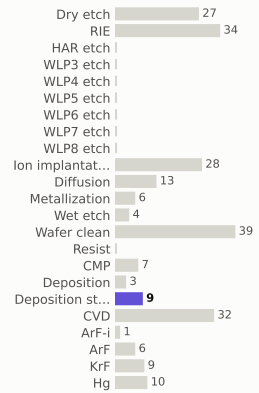

materials deposited (g)

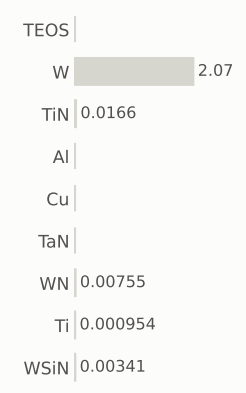

gases emitted (g)

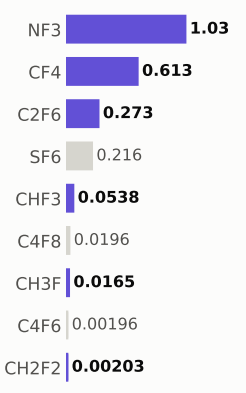

Step #2480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	192.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

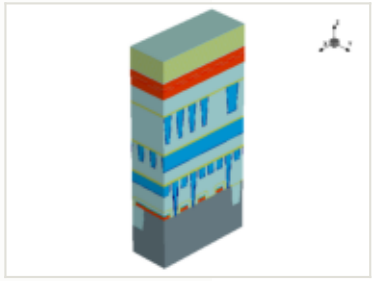

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

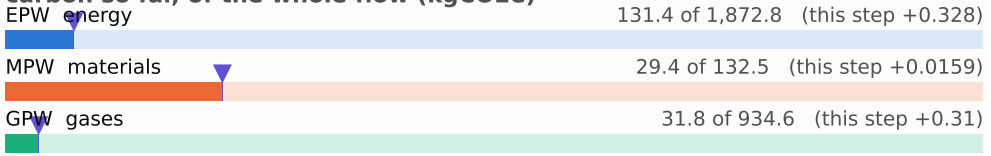

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

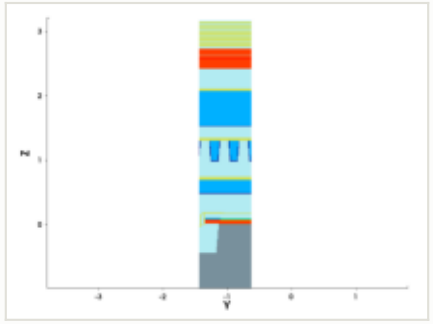

y cut at -1.035 µm

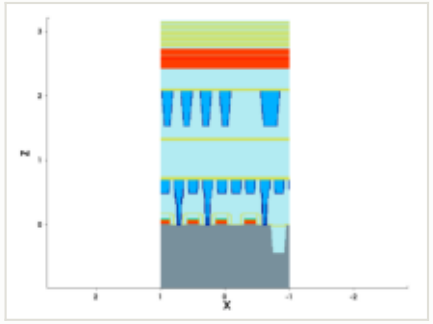

mask for this step

no mask for this step

steps by process area

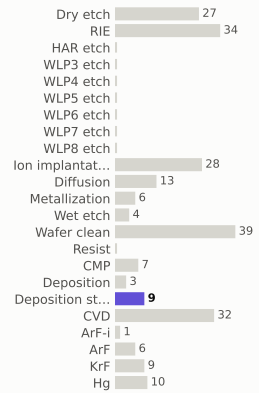

materials deposited (g)

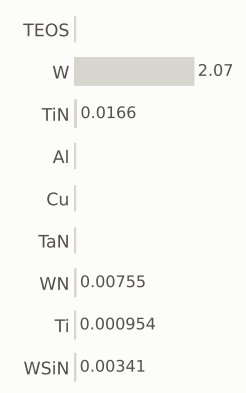

gases emitted (g)

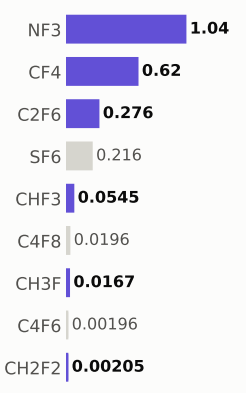

Step #2490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	193.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

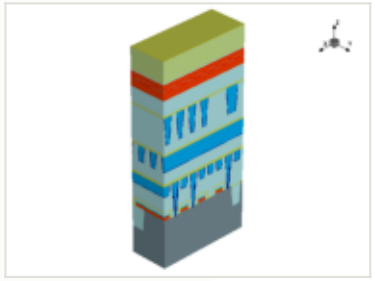

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

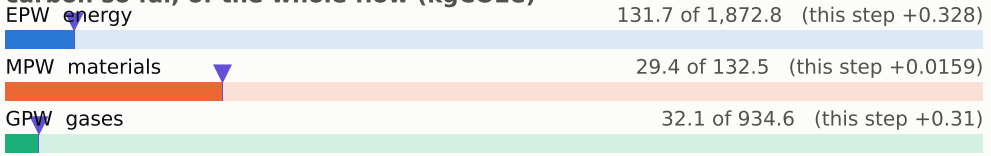

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

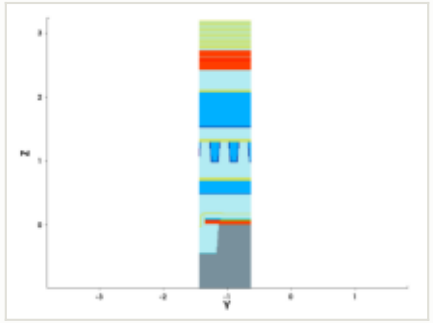

y cut at -1.035 µm

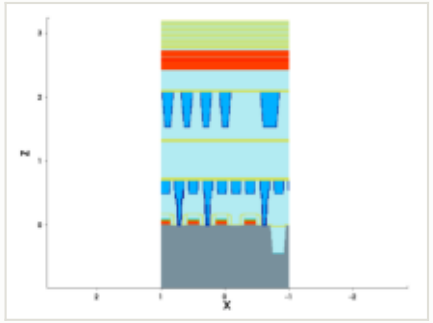

mask for this step

no mask for this step

steps by process area

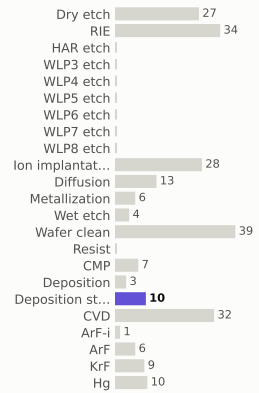

materials deposited (g)

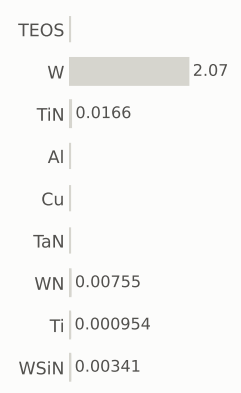

gases emitted (g)

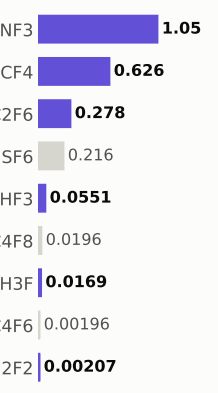

Step #2500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	193.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

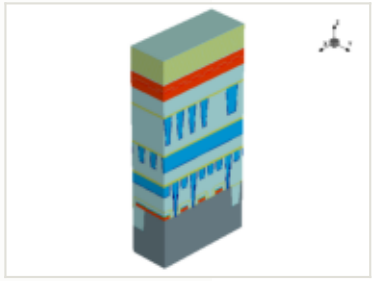

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

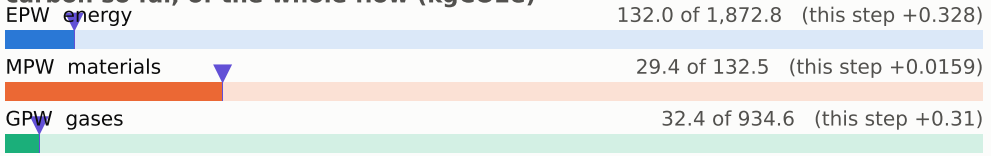

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

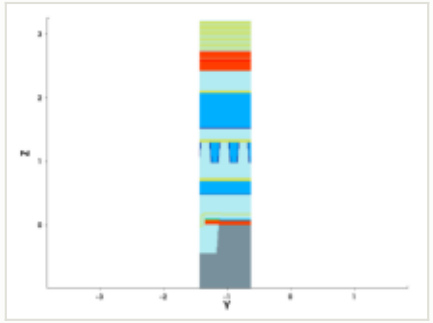

y cut at -1.035 µm

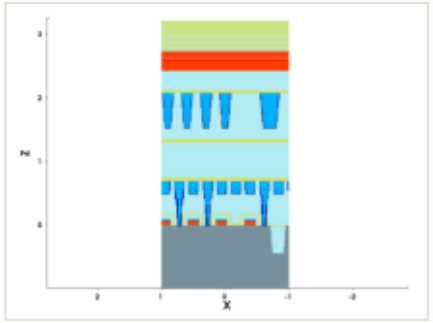

mask for this step

no mask for this step

steps by process area

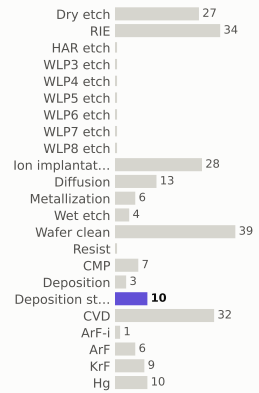

materials deposited (g)

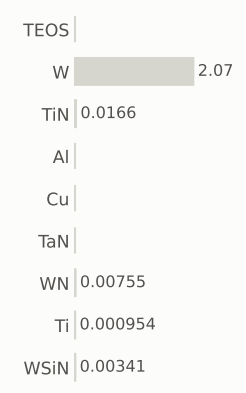

gases emitted (g)

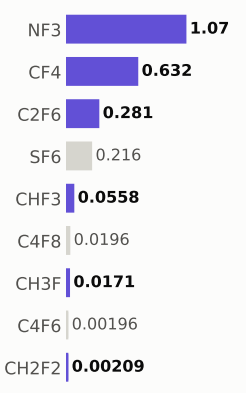

Step #2510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	194.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

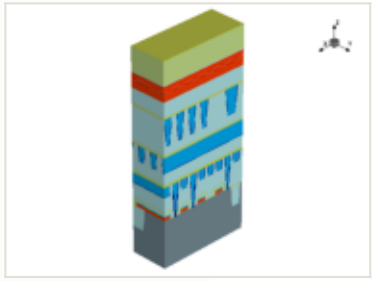

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

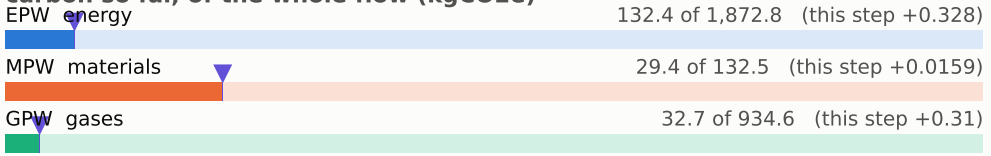

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

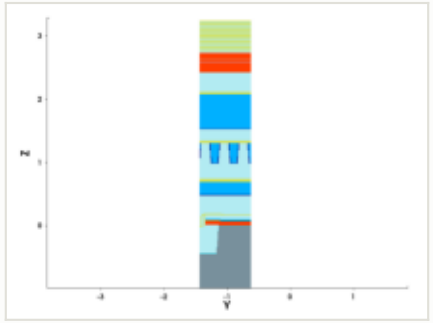

y cut at -1.035 µm

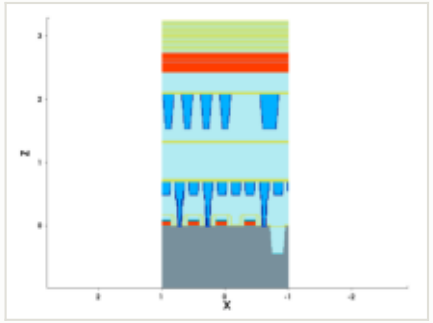

mask for this step

no mask for this step

steps by process area

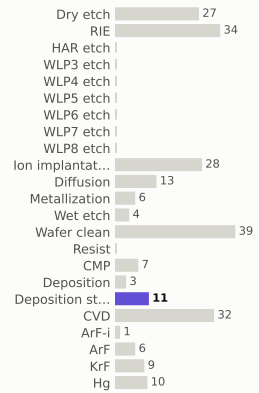

materials deposited (g)

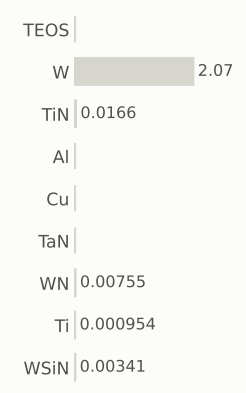

gases emitted (g)

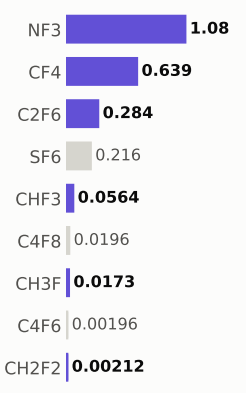

Step #2520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	195.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

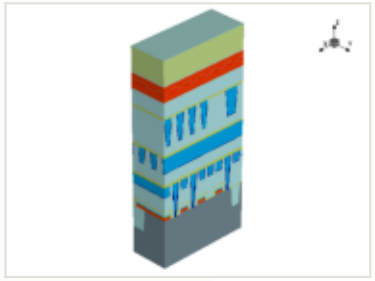

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

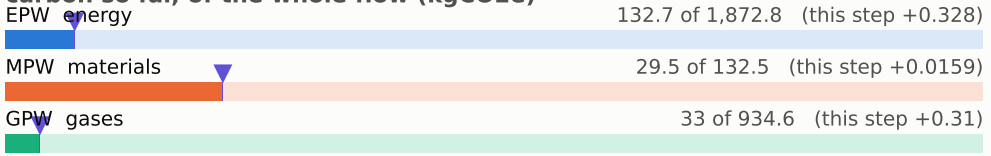

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

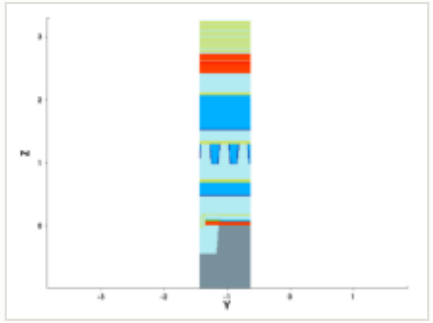

y cut at -1.035 µm

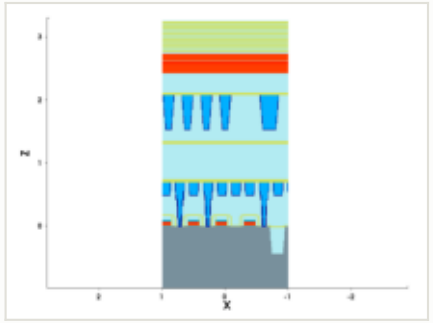

mask for this step

no mask for this step

steps by process area

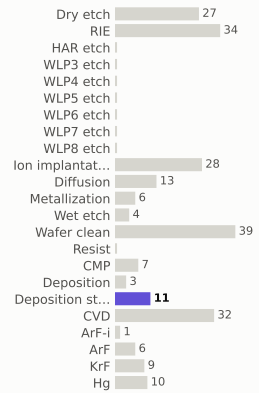

materials deposited (g)

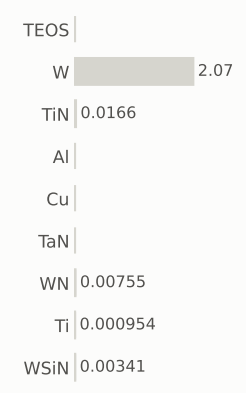

gases emitted (g)

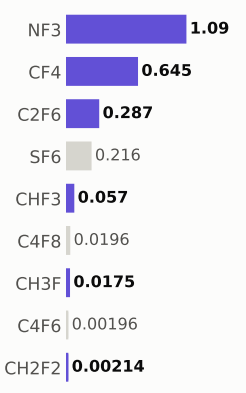

Step #2530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	195.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

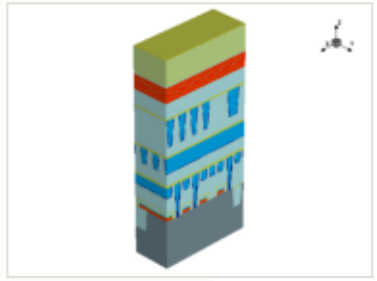

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

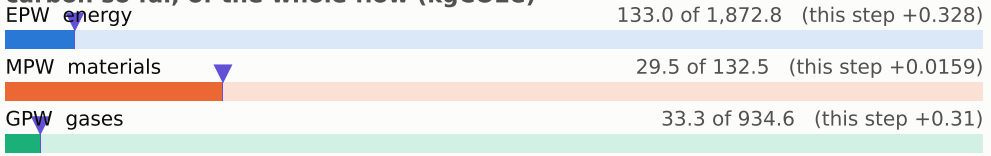

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

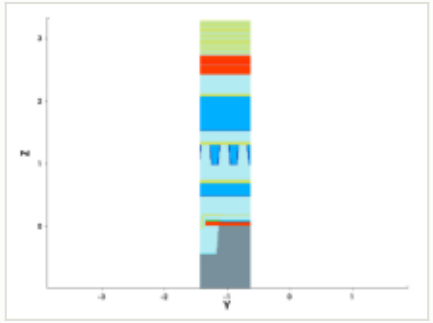

y cut at -1.035 µm

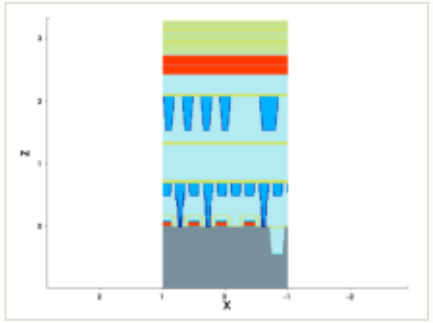

mask for this step

no mask for this step

steps by process area

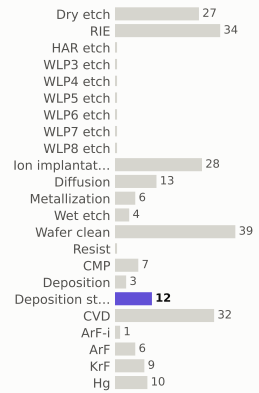

materials deposited (g)

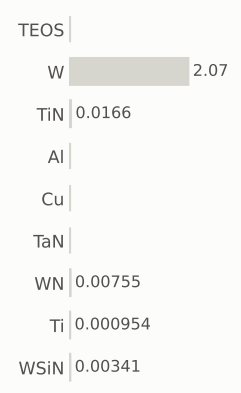

gases emitted (g)



Step #2540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	196.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

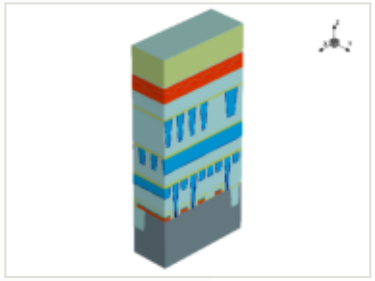

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

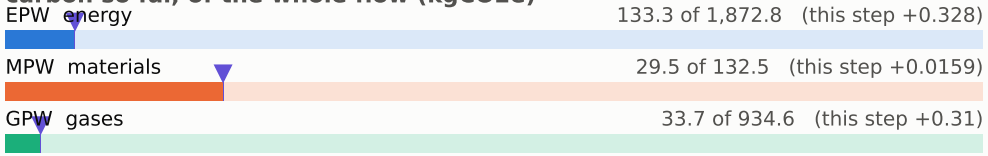

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

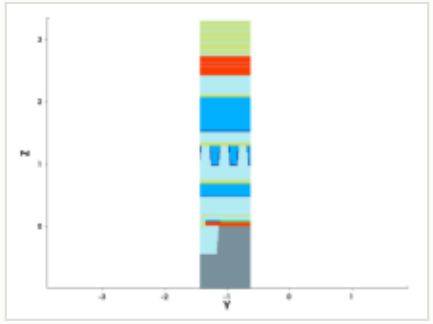

y cut at -1.035 µm

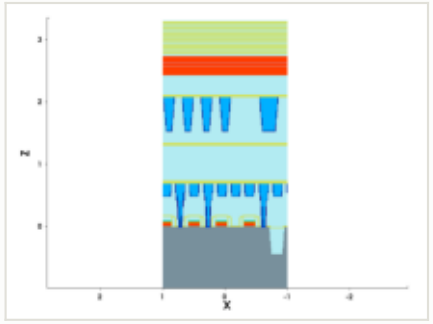

mask for this step

no mask for this step

steps by process area

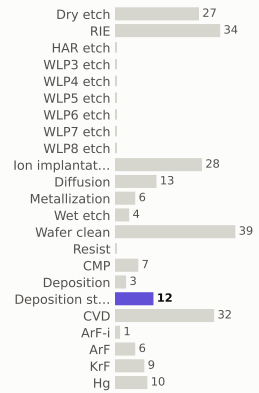

materials deposited (g)

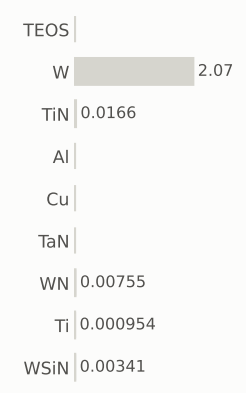

gases emitted (g)

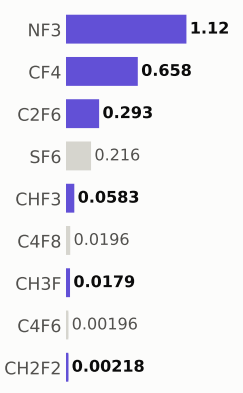

Step #2550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	197.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

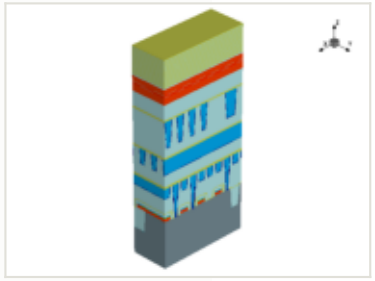

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

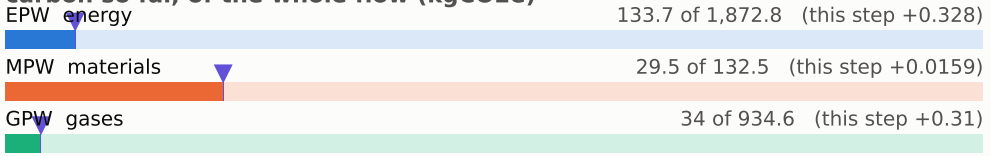

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

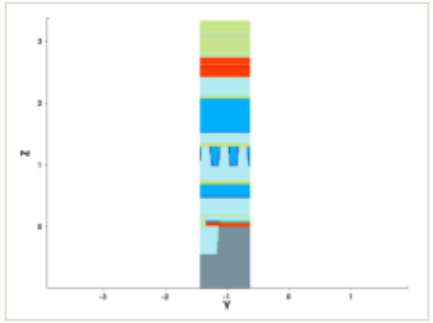

y cut at -1.035 µm

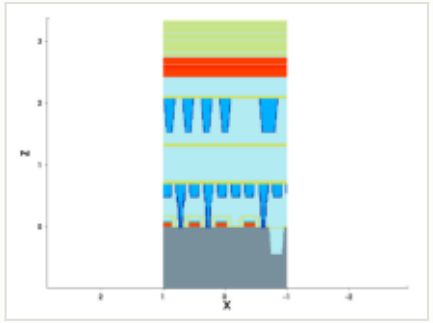

mask for this step

no mask for this step

steps by process area

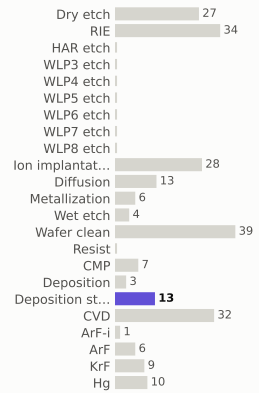

materials deposited (g)

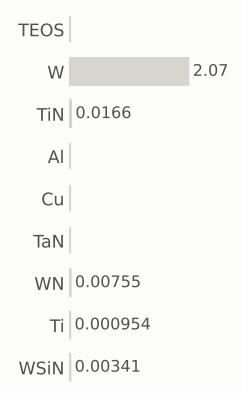

gases emitted (g)

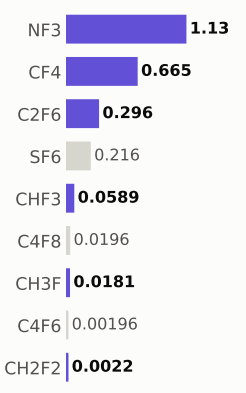

Step #2560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	197.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

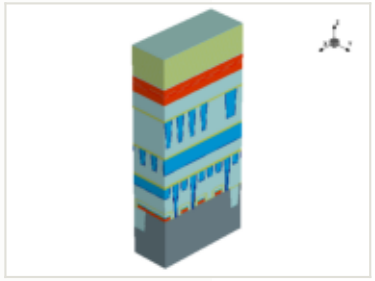

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

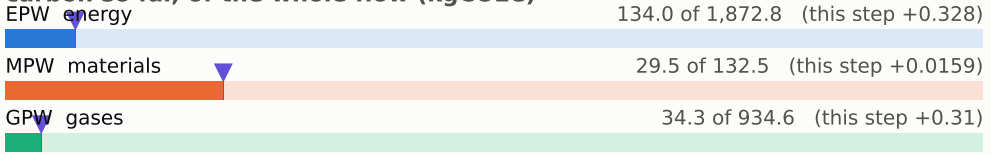

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

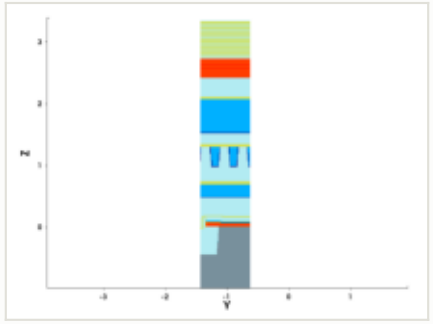

y cut at -1.035 µm

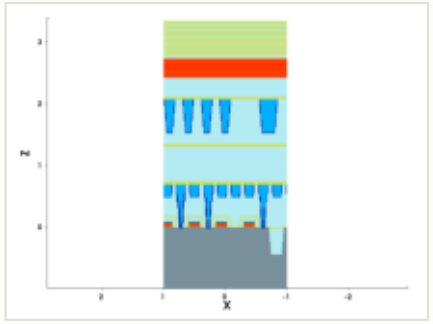

mask for this step

no mask for this step

steps by process area

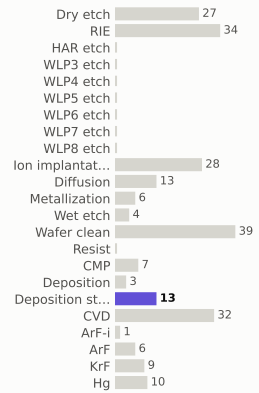

materials deposited (g)

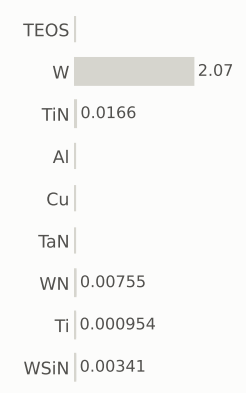

gases emitted (g)

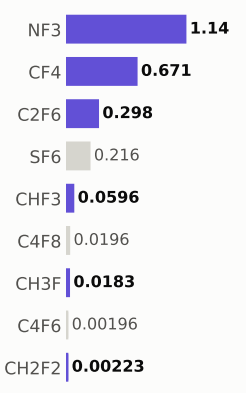

Step #2570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	198.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

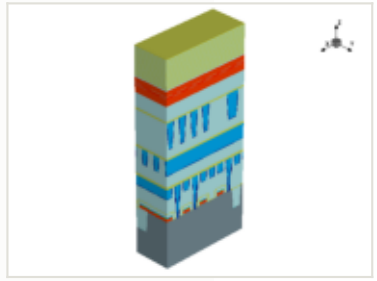

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

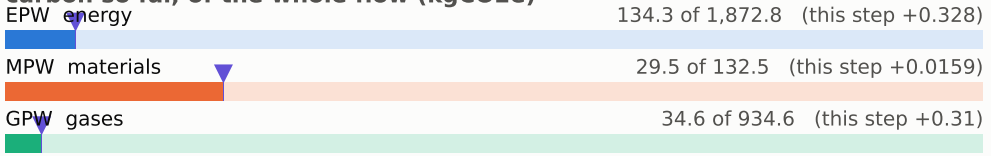

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

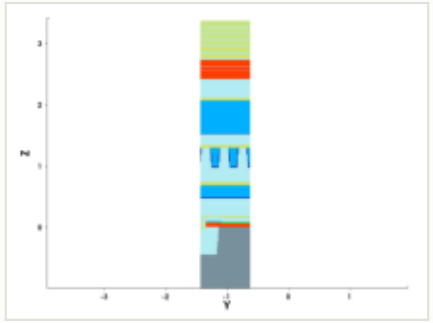

y cut at -1.035 µm

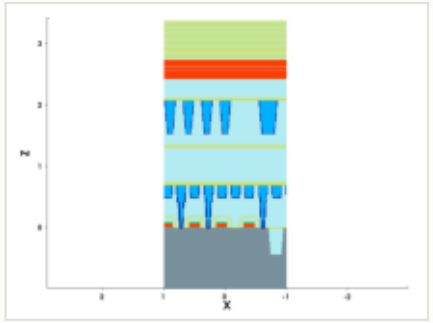

mask for this step

no mask for this step

steps by process area

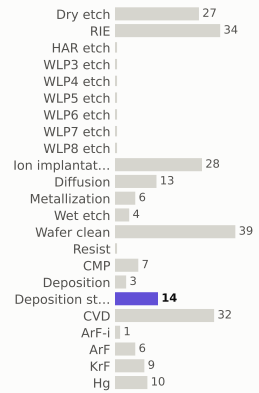

materials deposited (g)

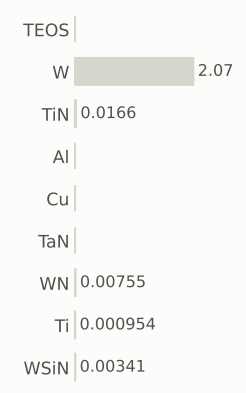

gases emitted (g)

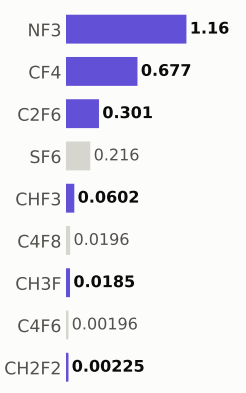

Step #2580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	199.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

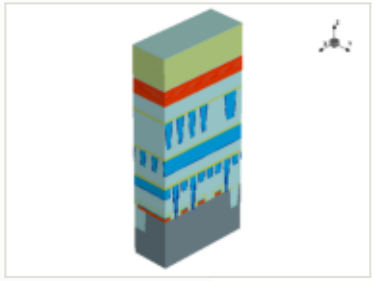

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

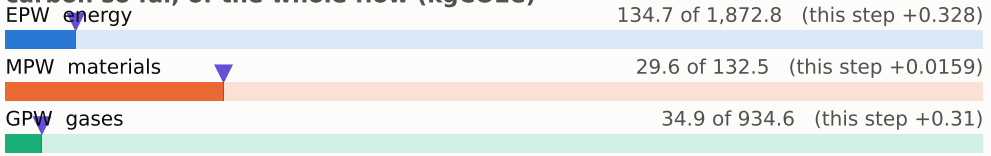

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

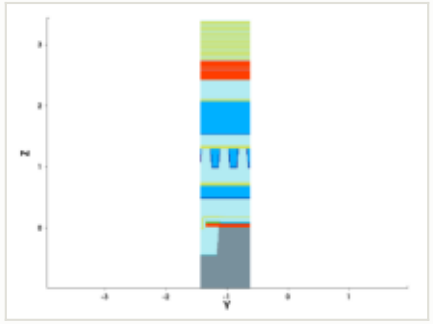

y cut at -1.035 µm

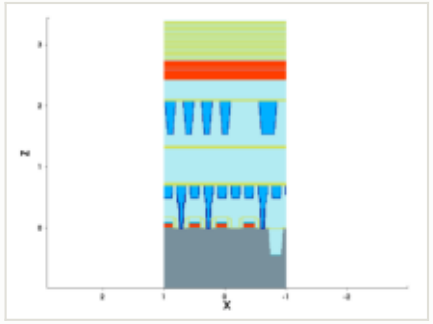

mask for this step

no mask for this step

steps by process area

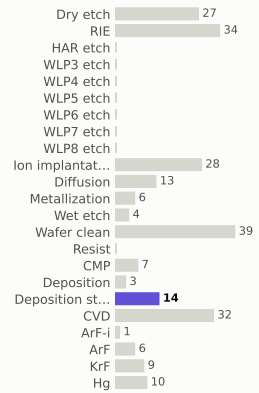

materials deposited (g)

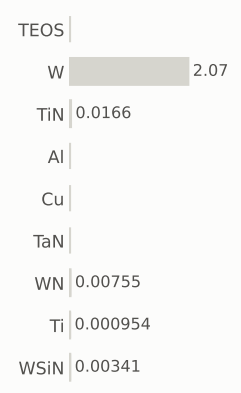

gases emitted (g)

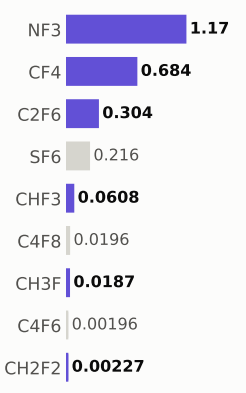

Step #2590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	199.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

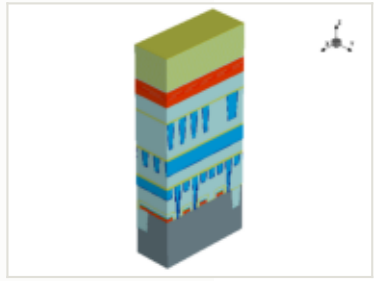

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

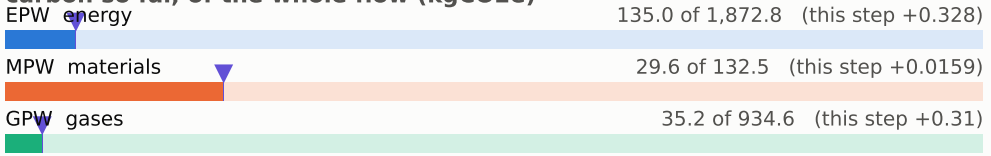

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

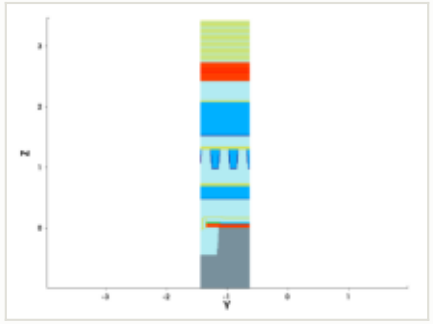

y cut at -1.035 µm

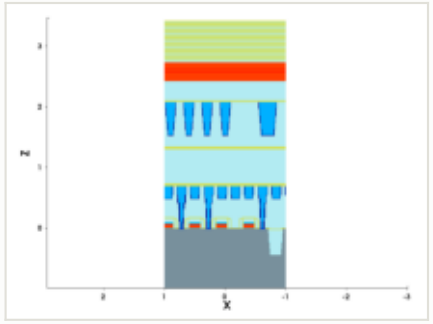

mask for this step

no mask for this step

steps by process area

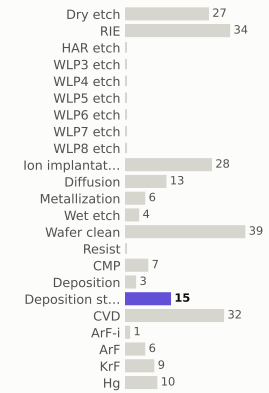

materials deposited (g)

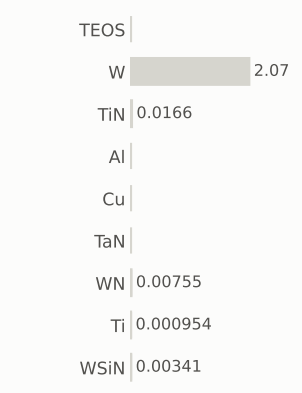

gases emitted (g)

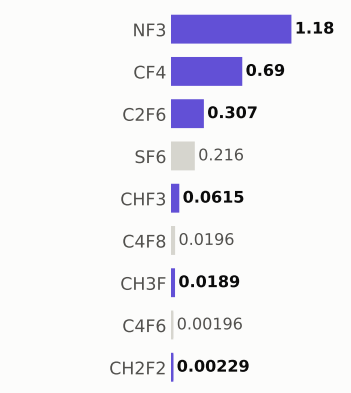

Step #2600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	200.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

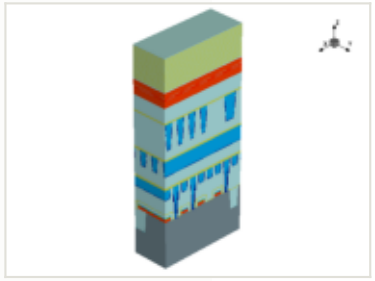

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

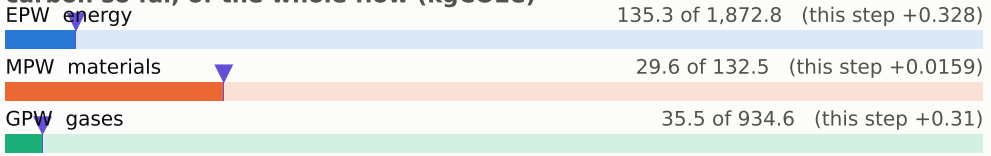

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

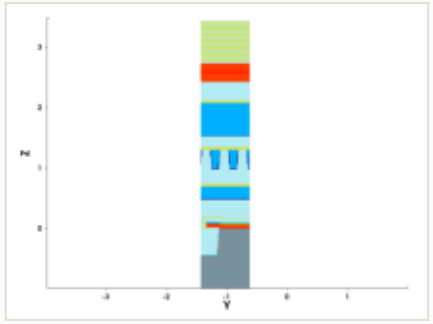

y cut at -1.035 µm

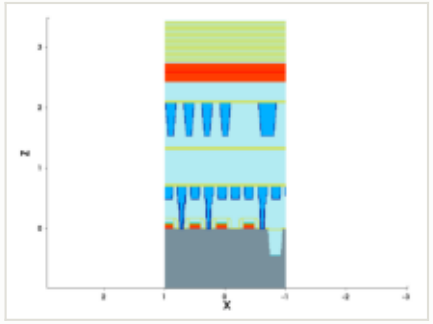

mask for this step

no mask for this step

steps by process area

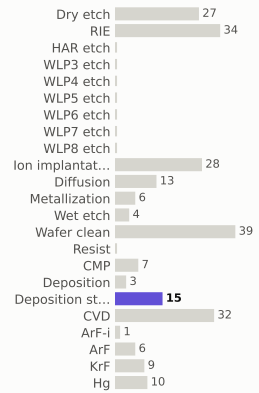

materials deposited (g)

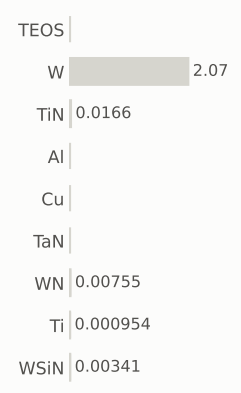

gases emitted (g)

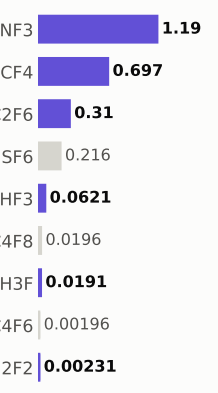

Step #2610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	201.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

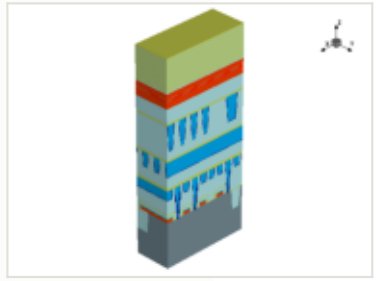

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

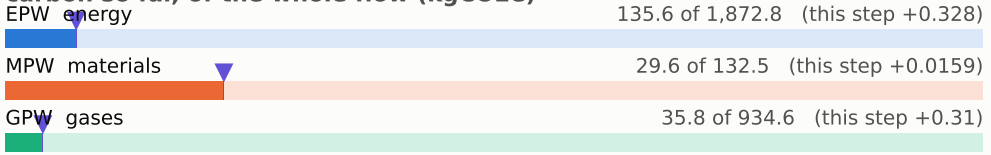

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

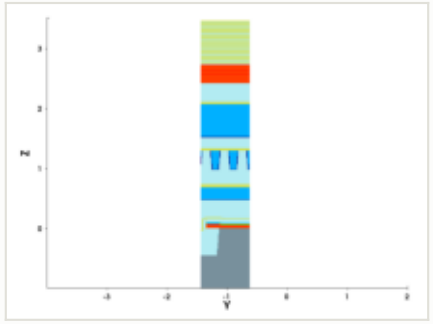

y cut at -1.035 µm

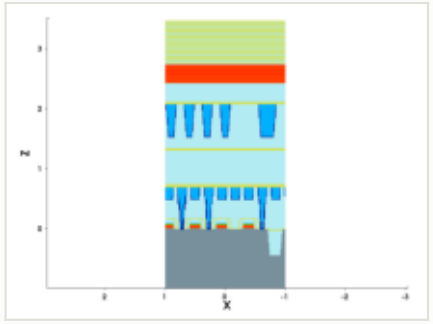

mask for this step

no mask for this step

steps by process area

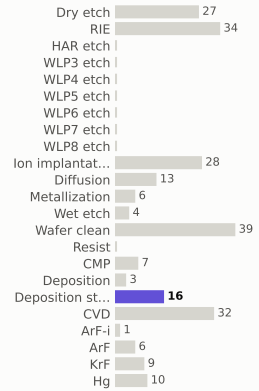

materials deposited (g)

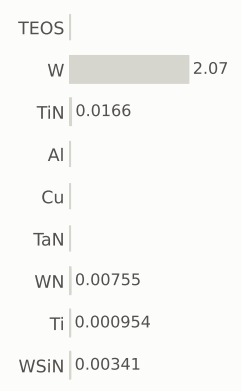

gases emitted (g)

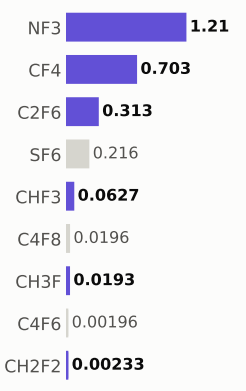

Step #2620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	201.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

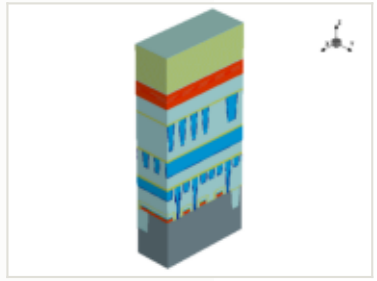

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

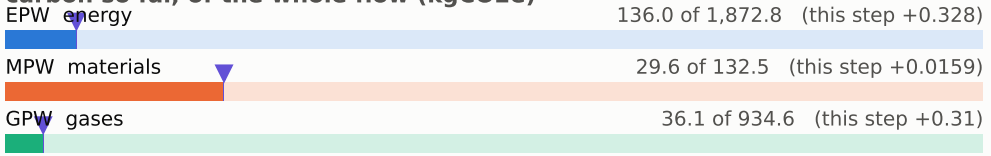

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

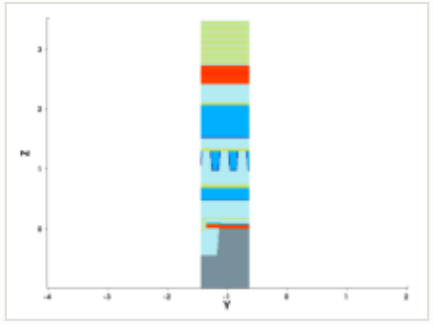

y cut at -1.035 µm

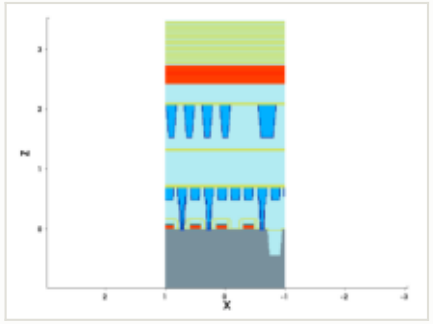

mask for this step

no mask for this step

steps by process area

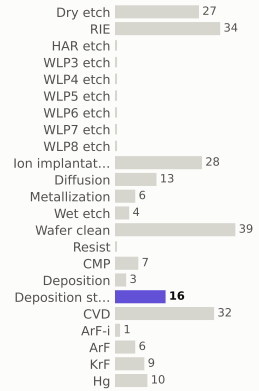

materials deposited (g)

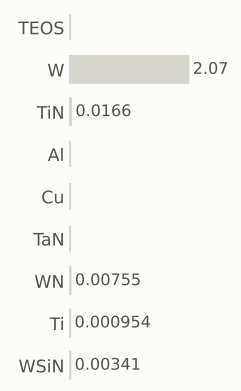

gases emitted (g)

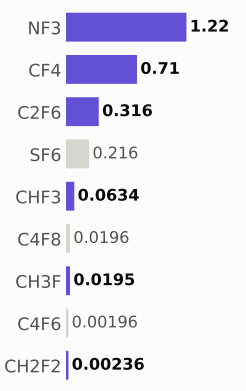

Step #2630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	202.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

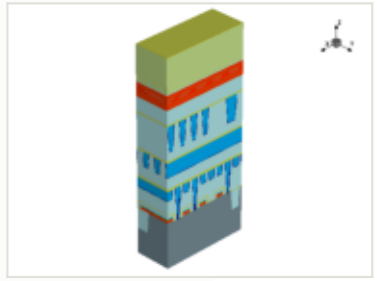

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

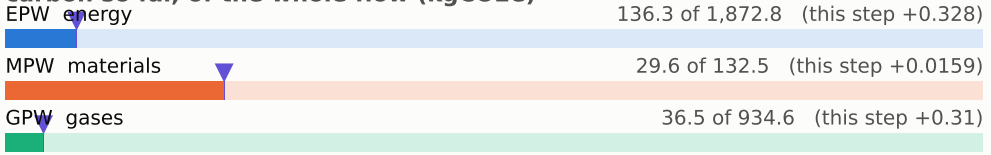

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

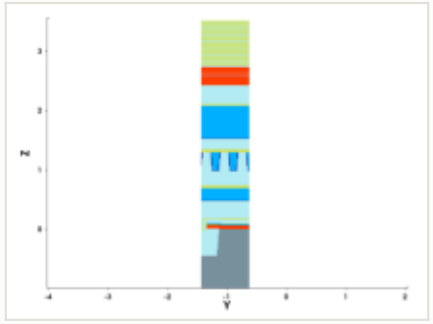

y cut at -1.035 µm

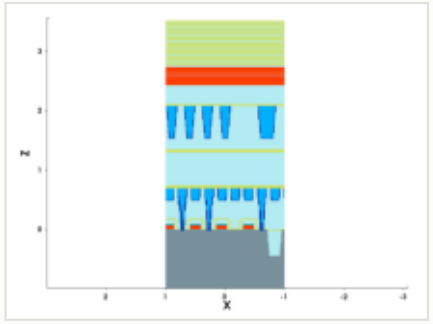

mask for this step

no mask for this step

steps by process area

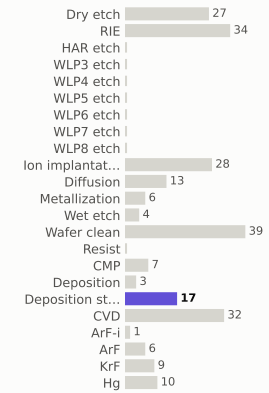

materials deposited (g)

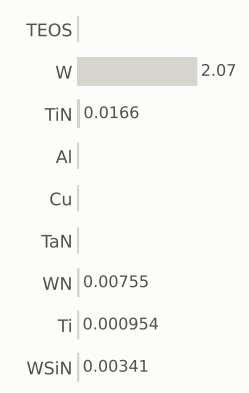

gases emitted (g)

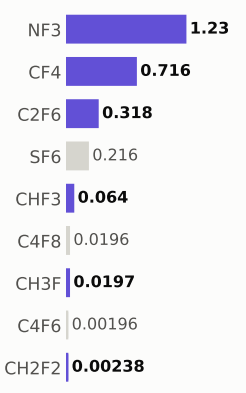

Step #2640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	203.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

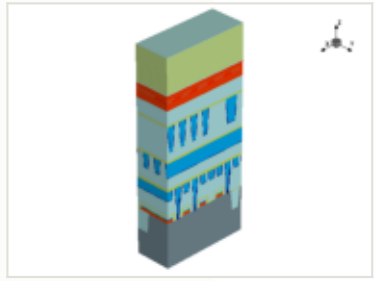

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

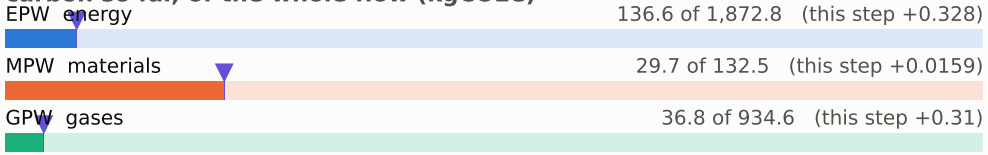

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

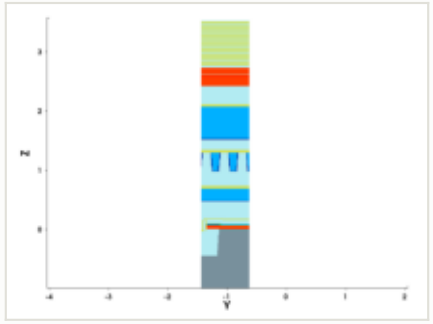

y cut at -1.035 µm

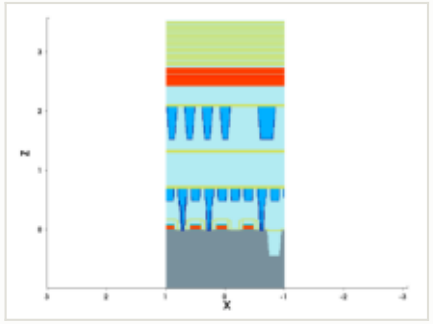

mask for this step

no mask for this step

steps by process area

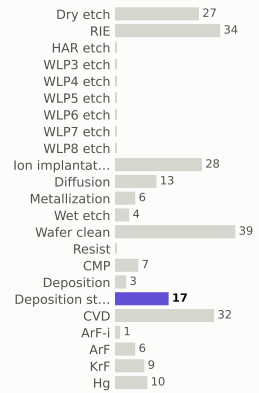

materials deposited (g)

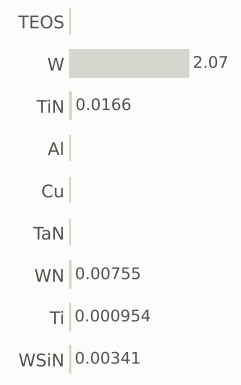

gases emitted (g)



Step #2650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	203.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

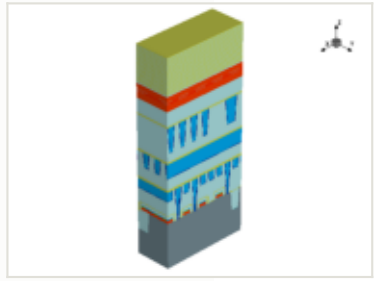

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

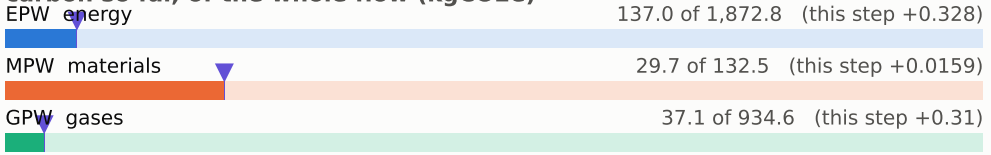

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

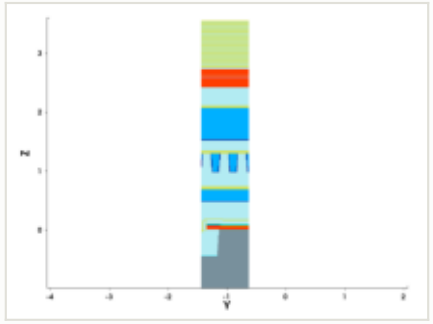

y cut at -1.035 µm

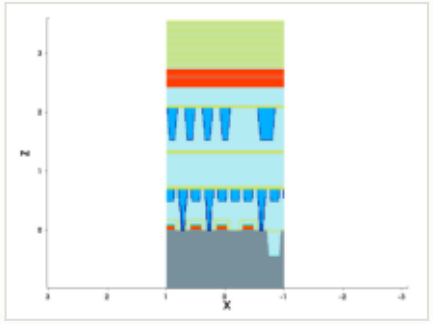

mask for this step

no mask for this step

steps by process area

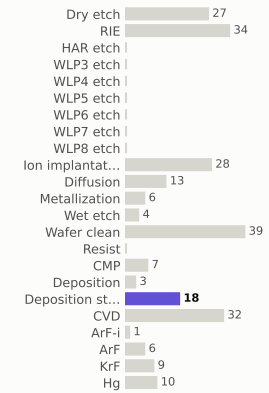

materials deposited (g)

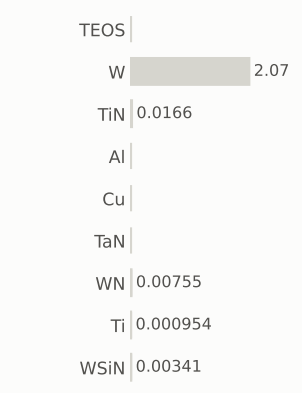

gases emitted (g)

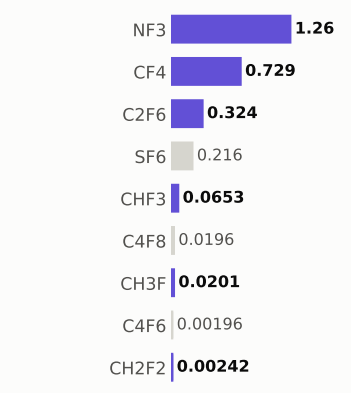

Step #2660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	204.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

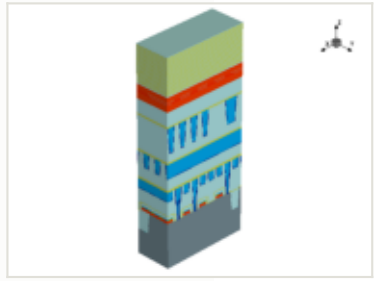

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

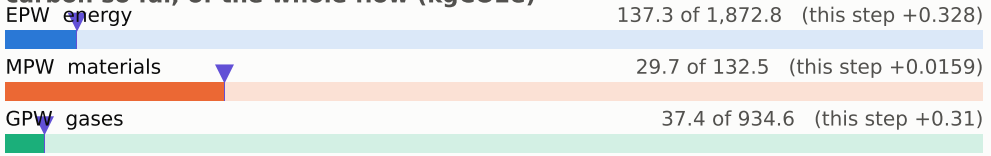

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

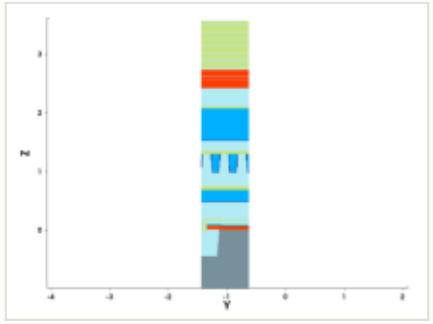

y cut at -1.035 µm

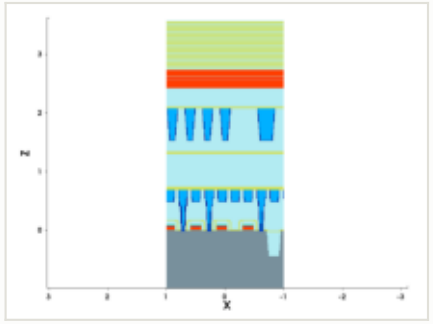

mask for this step

no mask for this step

steps by process area

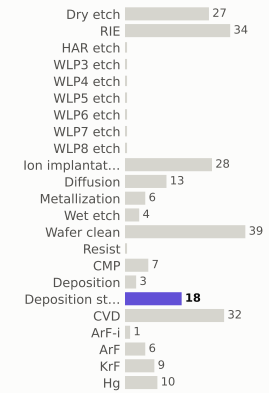

materials deposited (g)

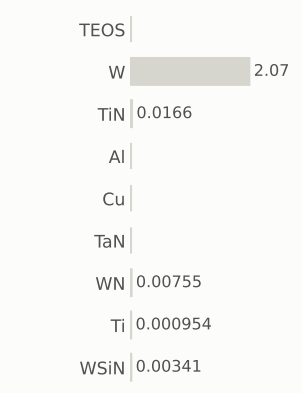

gases emitted (g)

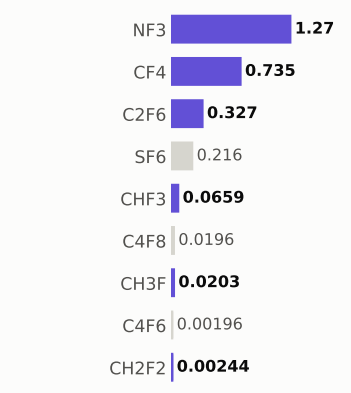

Step #2670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	205.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

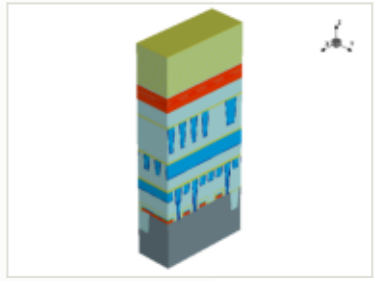

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

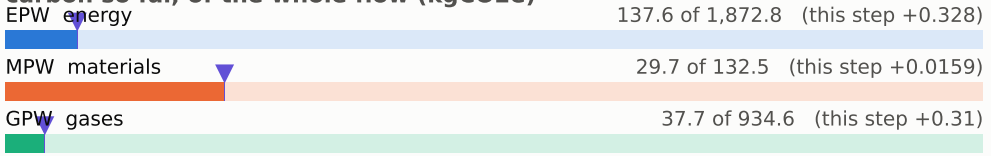

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

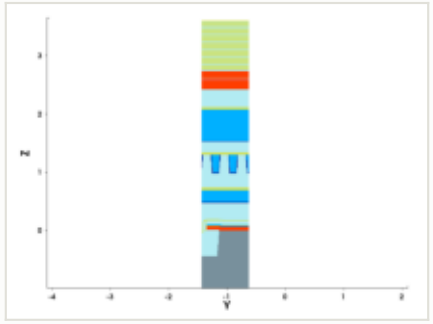

y cut at -1.035 µm

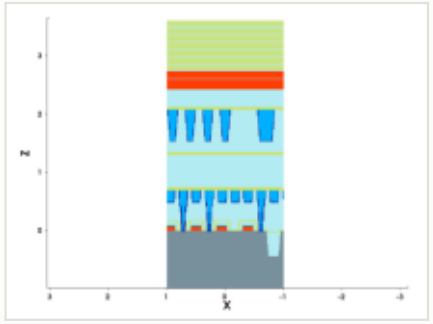

mask for this step

no mask for this step

steps by process area

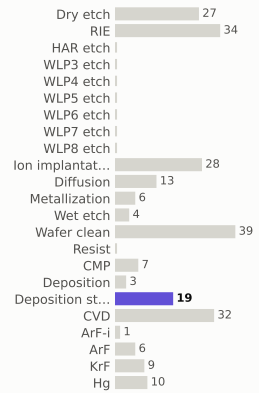

materials deposited (g)

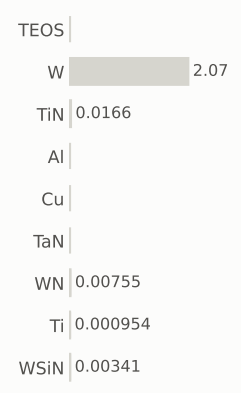

gases emitted (g)

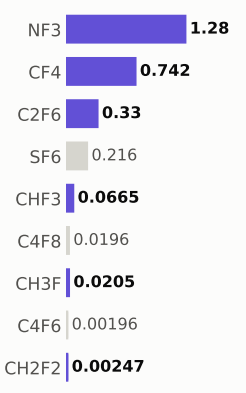

Step #2680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	205.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

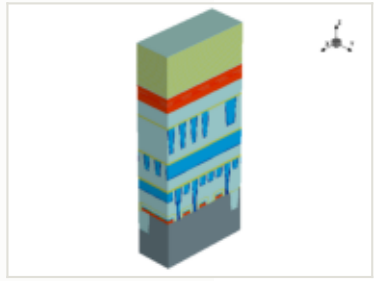

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

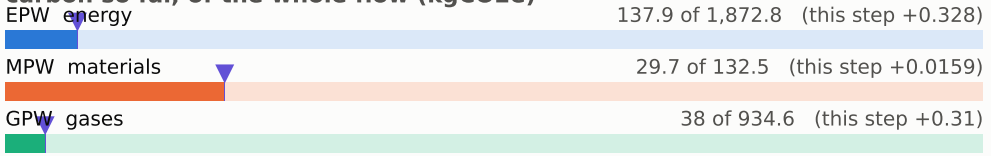

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

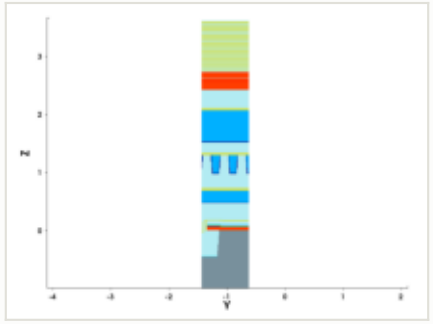

y cut at -1.035 µm

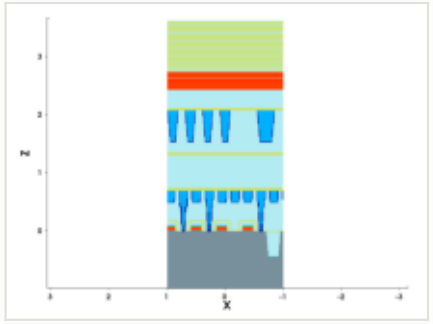

mask for this step

no mask for this step

steps by process area

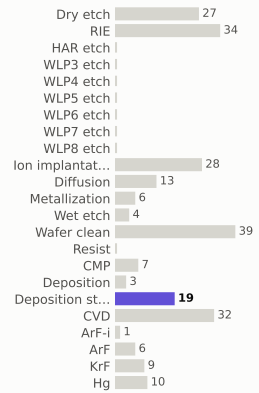

materials deposited (g)

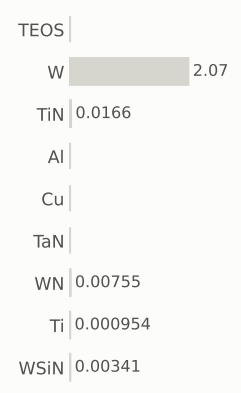

gases emitted (g)

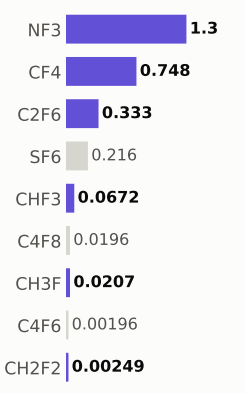

Step #2690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	206.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

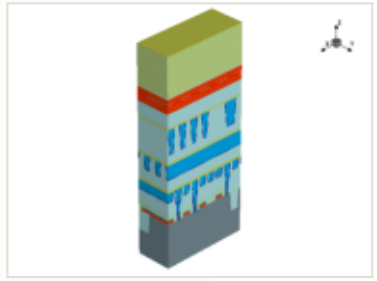

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

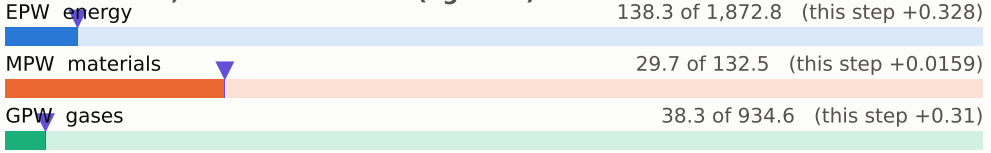

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

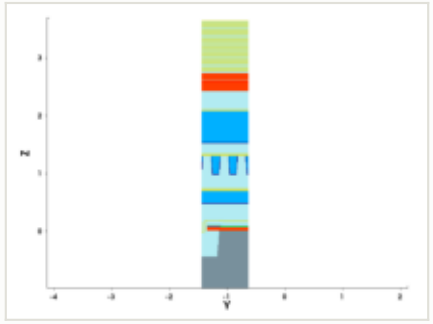

y cut at -1.035 µm

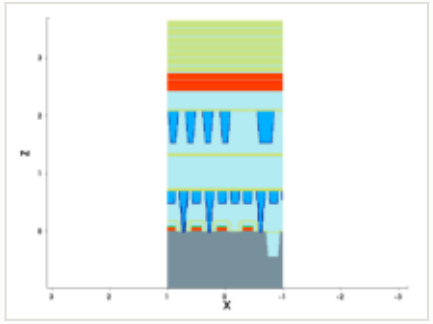

mask for this step

no mask for this step

steps by process area

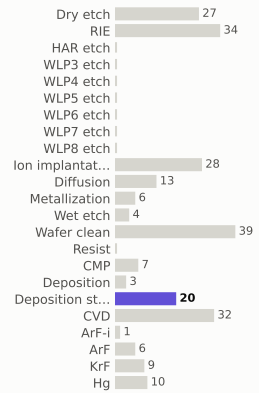

materials deposited (g)

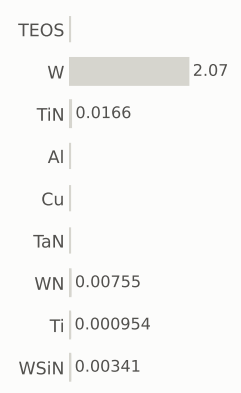

gases emitted (g)

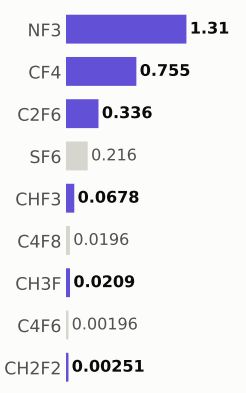

Step #2700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	207.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

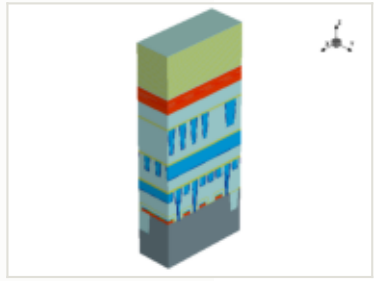

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

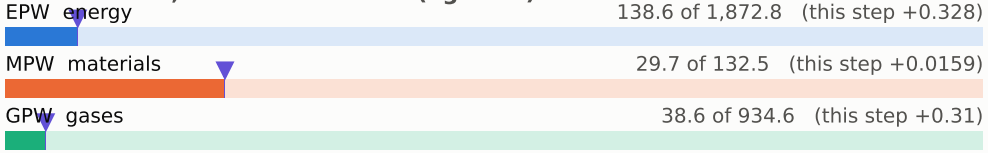

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

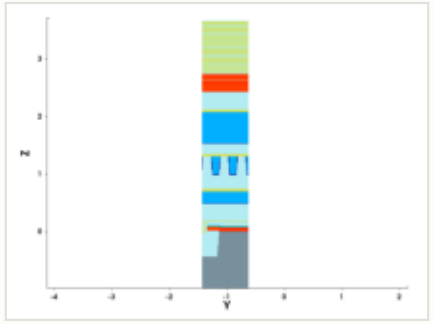

y cut at -1.035 µm

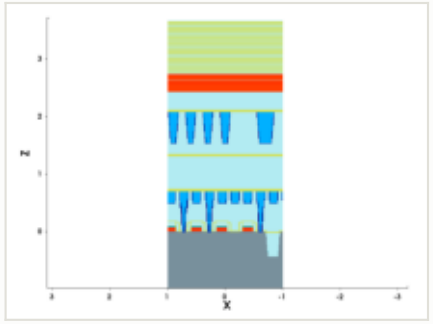

mask for this step

no mask for this step

steps by process area

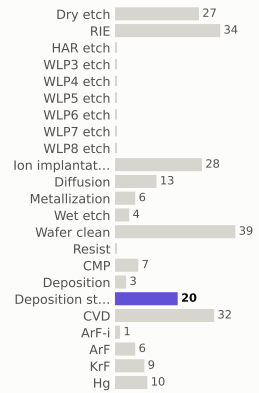

materials deposited (g)

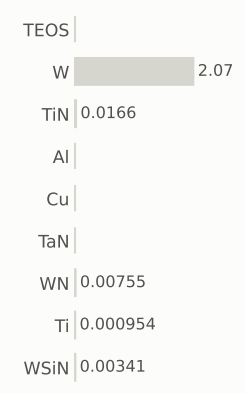

gases emitted (g)

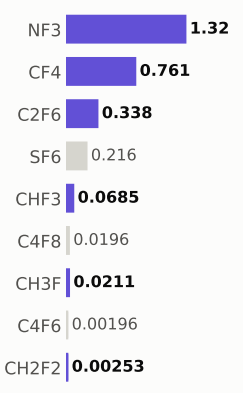

Step #2710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	207.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

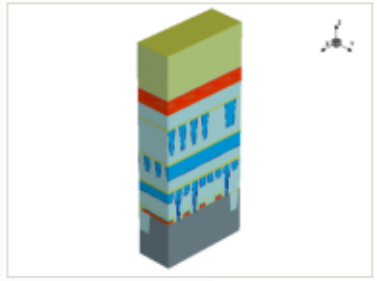

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

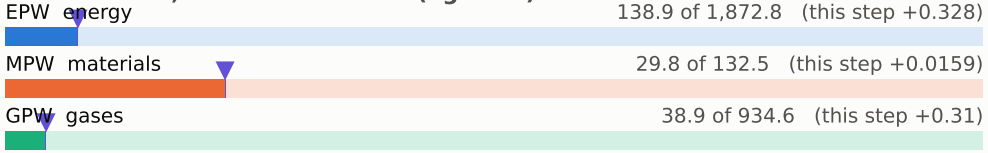

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

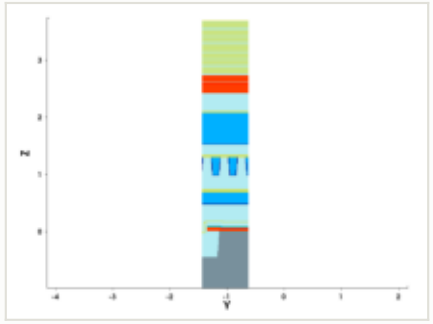

y cut at -1.035 µm

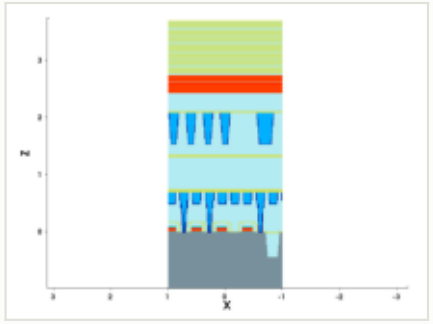

mask for this step

no mask for this step

steps by process area

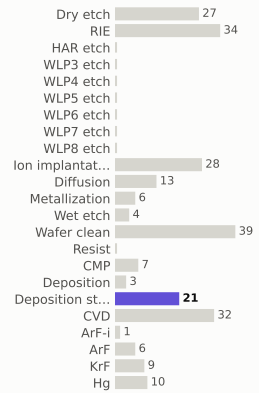

materials deposited (g)

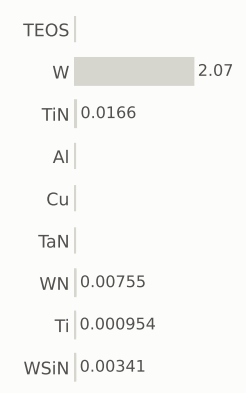

gases emitted (g)

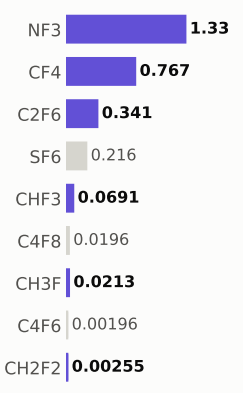

Step #2720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	208.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

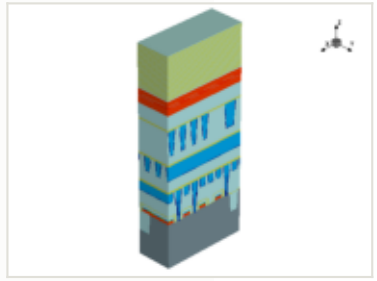

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

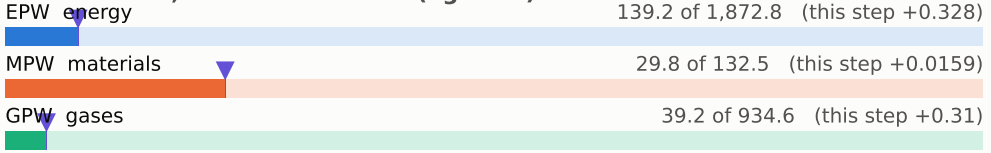

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

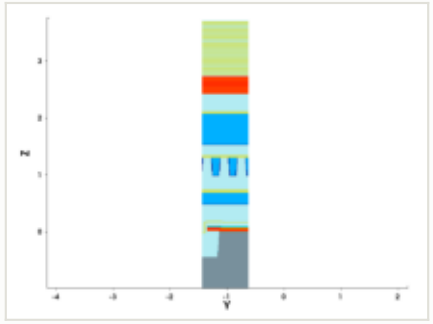

y cut at -1.035 µm

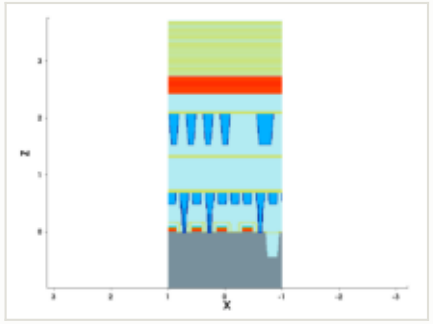

mask for this step

no mask for this step

steps by process area

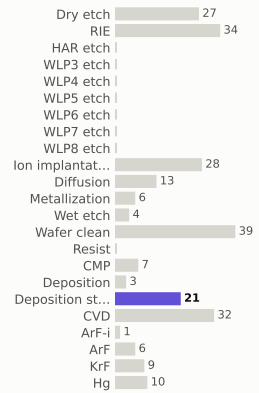

materials deposited (g)

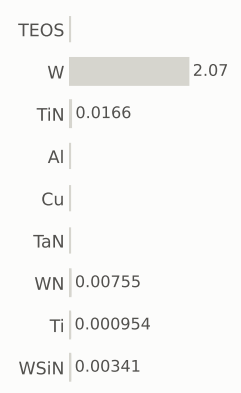

gases emitted (g)

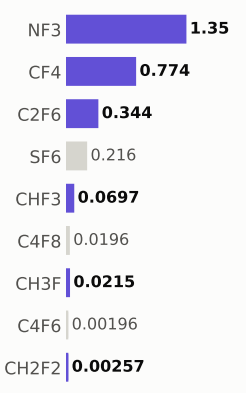

Step #2730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	208.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

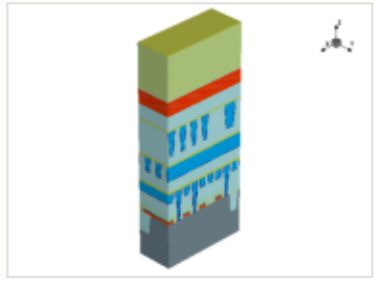

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

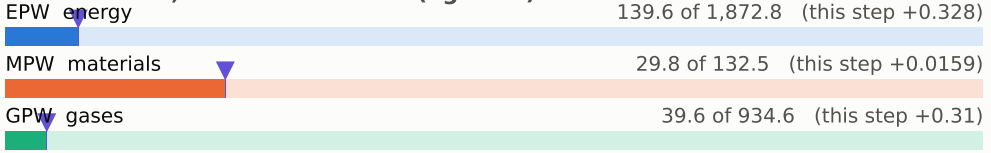

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

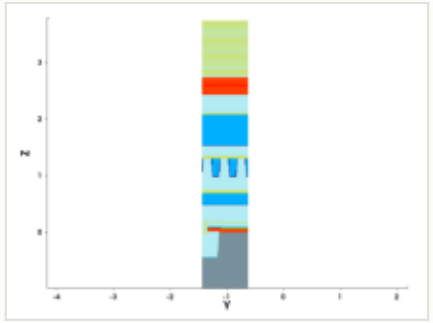

y cut at -1.035 µm

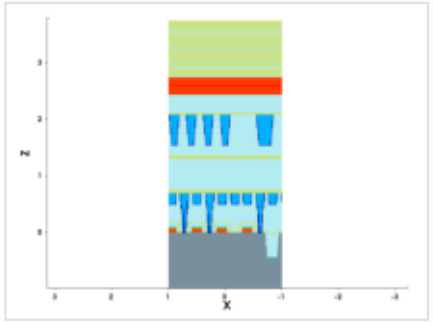

mask for this step

no mask for this step

steps by process area

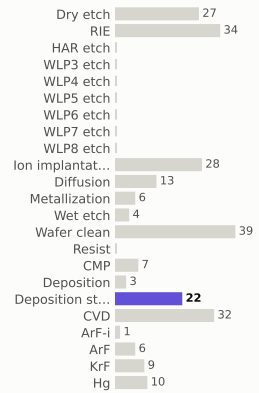

materials deposited (g)

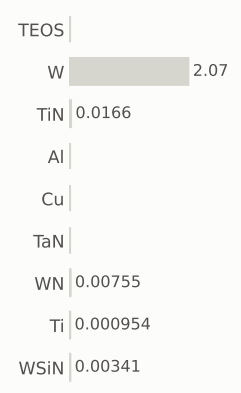

gases emitted (g)

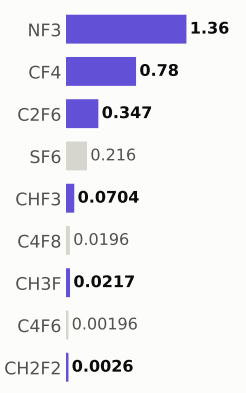

Step #2740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	209.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

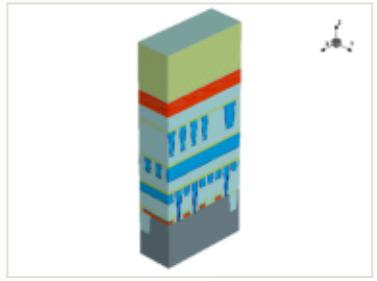

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

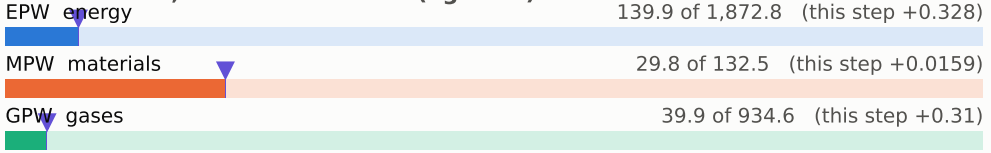

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

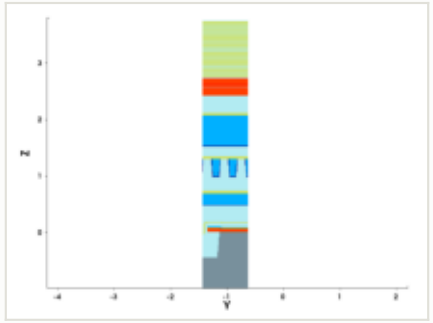

y cut at -1.035 µm

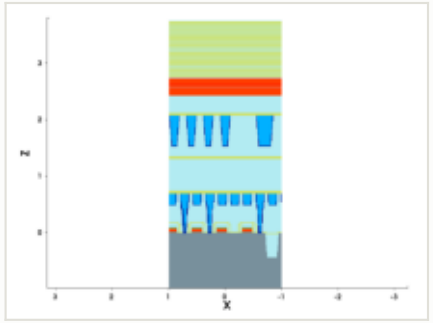

mask for this step

no mask for this step

steps by process area

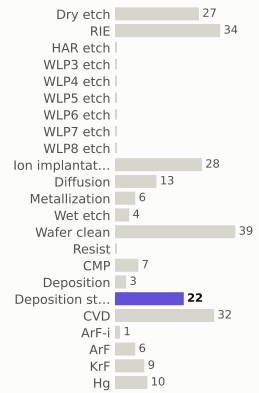

materials deposited (g)

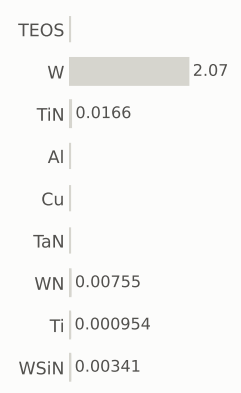

gases emitted (g)

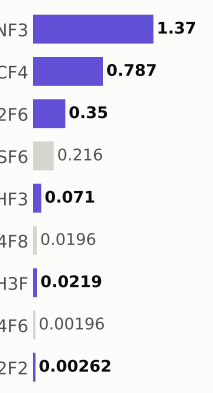

Step #2750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	210.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

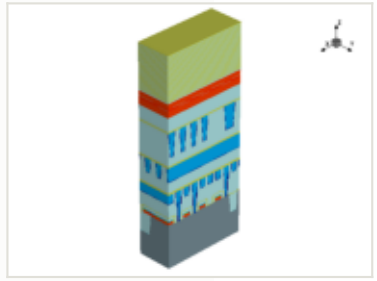

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

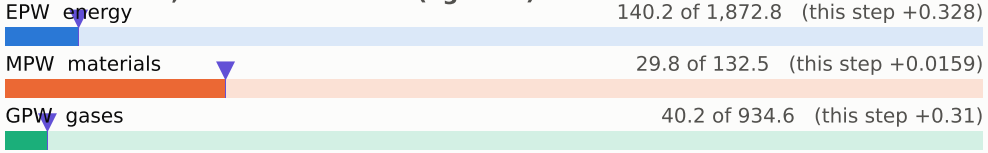

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

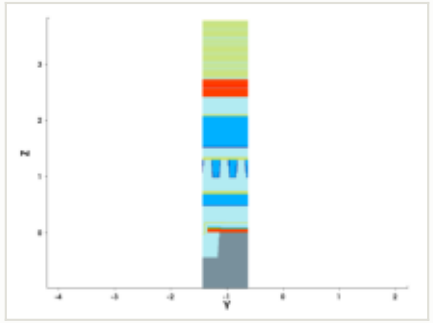

y cut at -1.035 µm

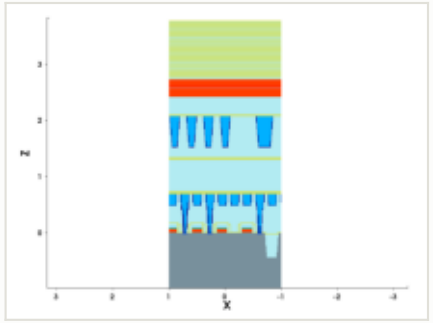

mask for this step

no mask for this step

steps by process area

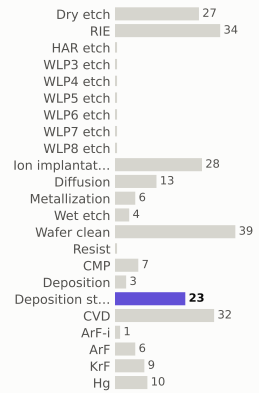

materials deposited (g)

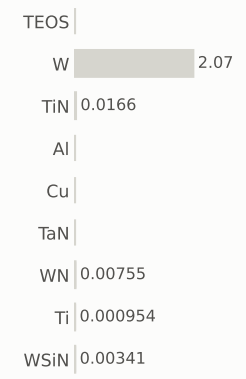

gases emitted (g)

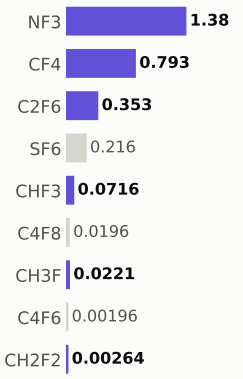

Step #2760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	210.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

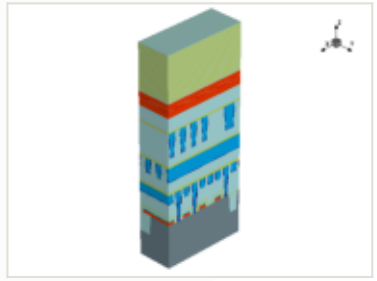

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

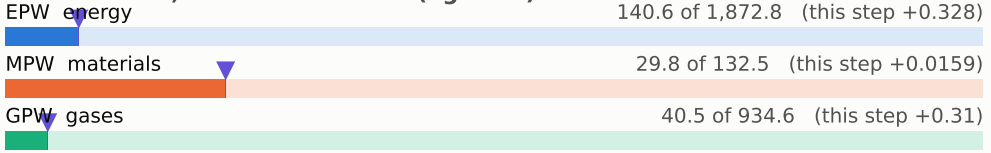

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

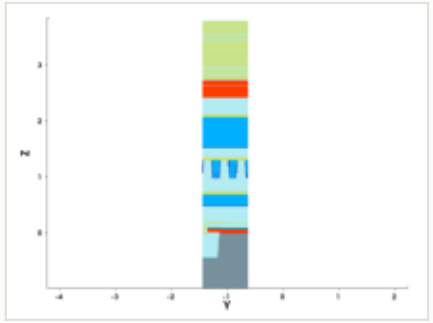

y cut at -1.035 µm

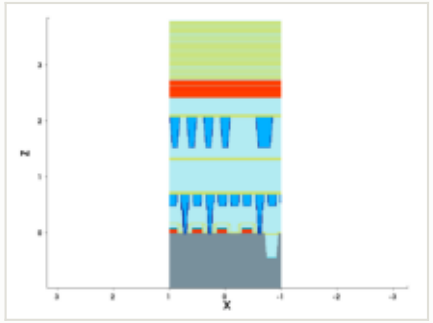

mask for this step

no mask for this step

steps by process area

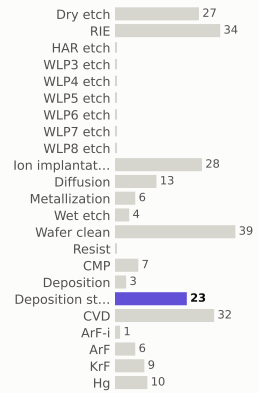

materials deposited (g)

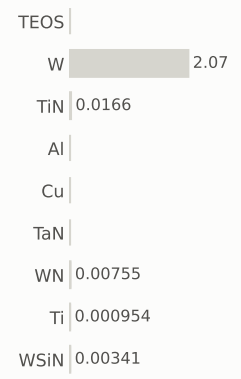

gases emitted (g)

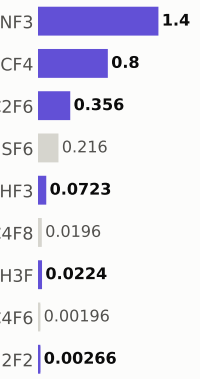

Step #2770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	211.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

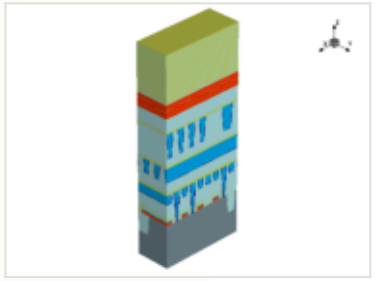

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

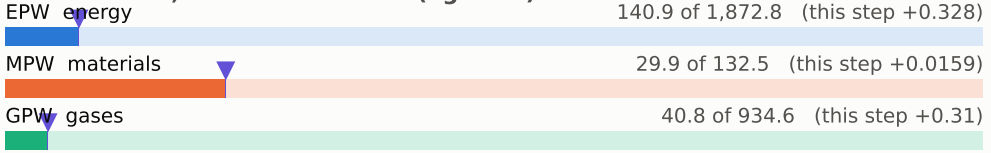

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

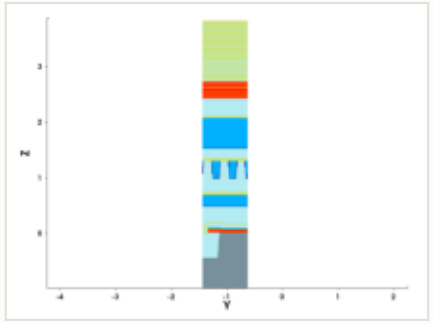

y cut at -1.035 µm

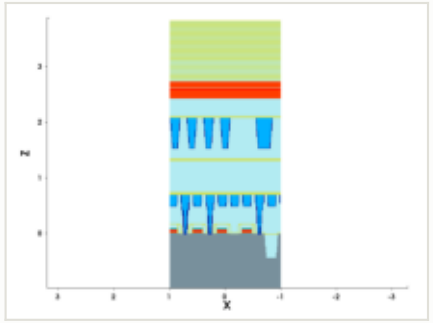

mask for this step

no mask for this step

steps by process area

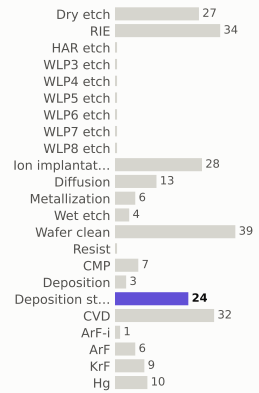

materials deposited (g)

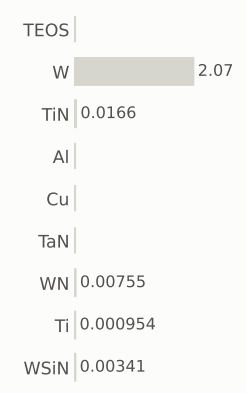

gases emitted (g)

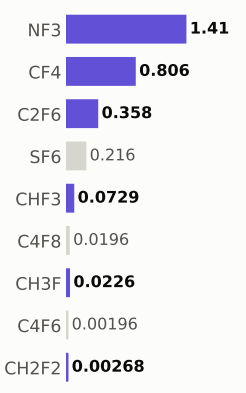

Step #2780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	212.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

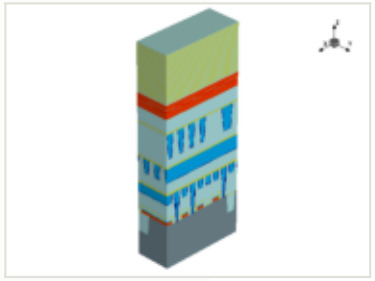

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

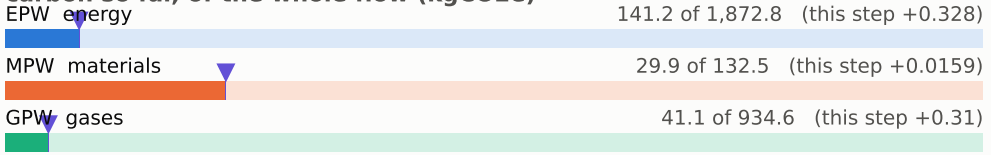

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

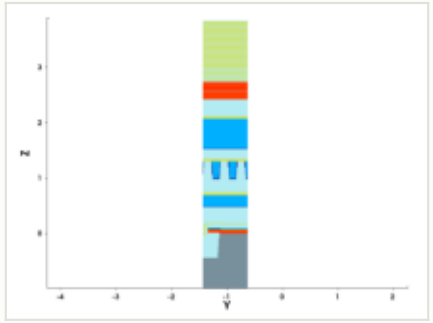

y cut at -1.035 µm

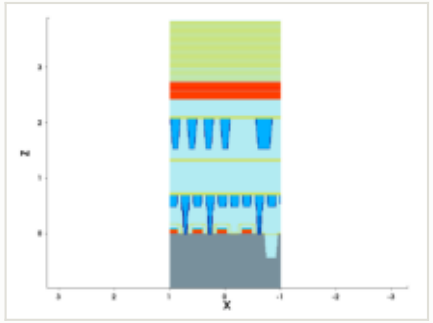

mask for this step

no mask for this step

steps by process area

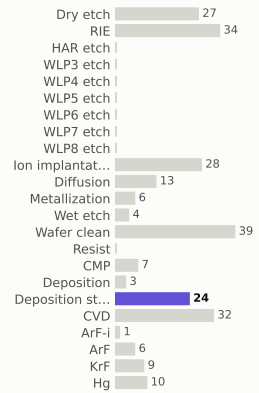

materials deposited (g)

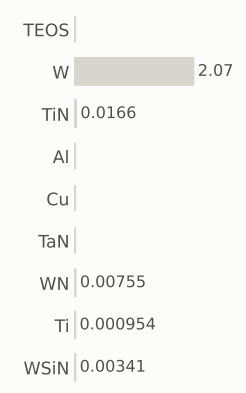

gases emitted (g)

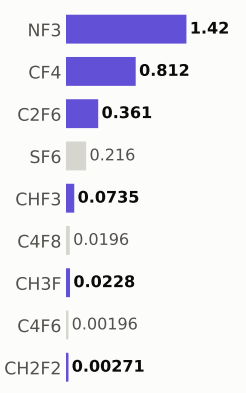

Step #2790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	212.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

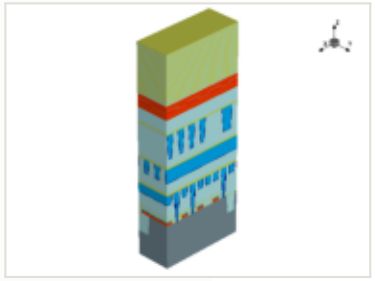

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

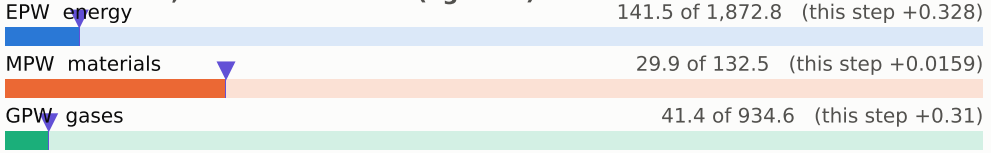

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

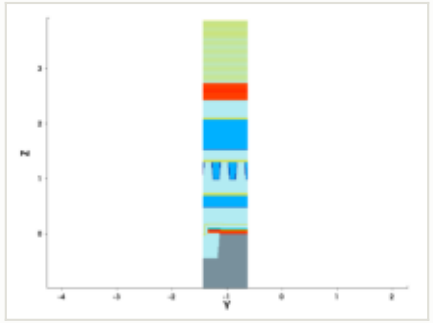

y cut at -1.035 µm

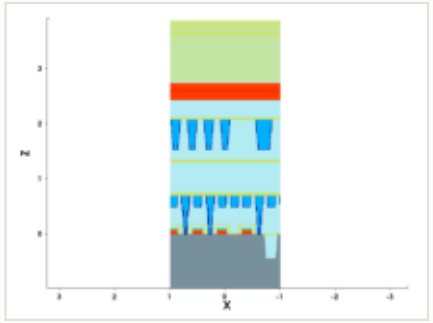

mask for this step

no mask for this step

steps by process area

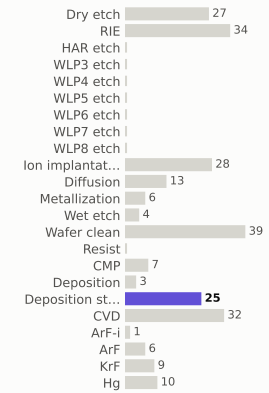

materials deposited (g)

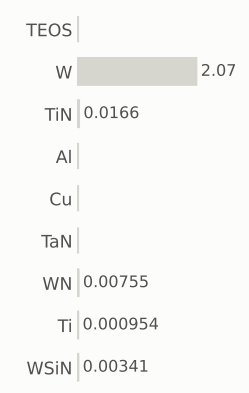

gases emitted (g)

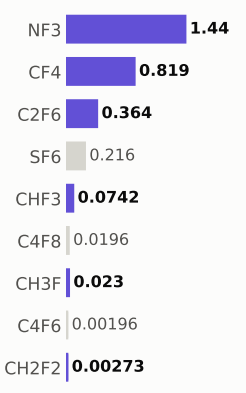

Step #2800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	213.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

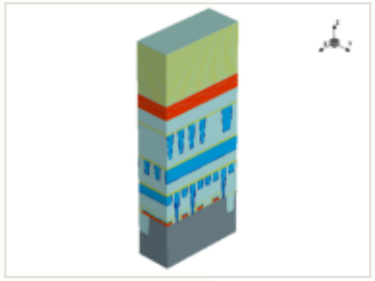

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

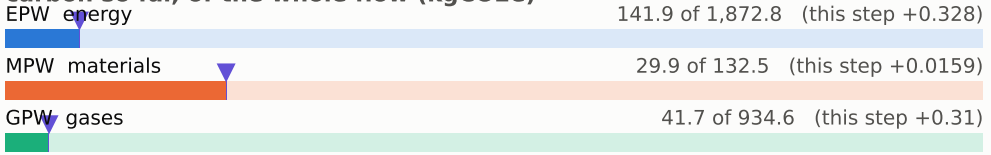

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

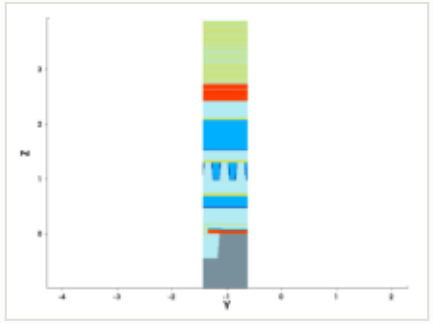

y cut at -1.035 µm

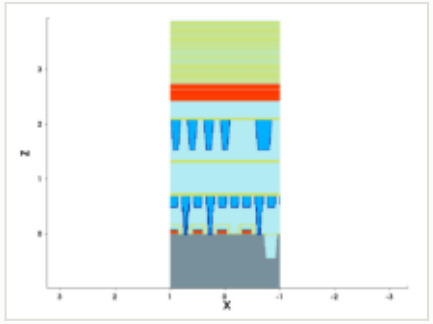

mask for this step

no mask for this step

steps by process area

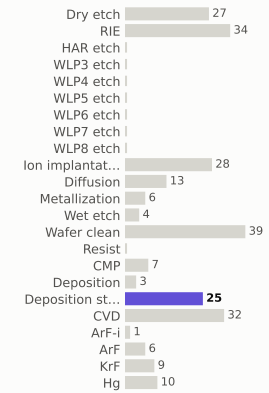

materials deposited (g)

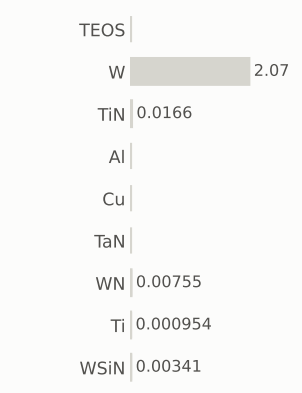

gases emitted (g)

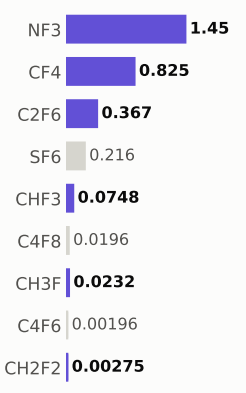

Step #2810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	214.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

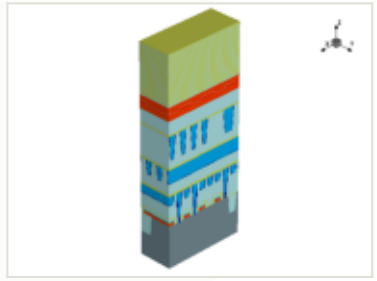

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

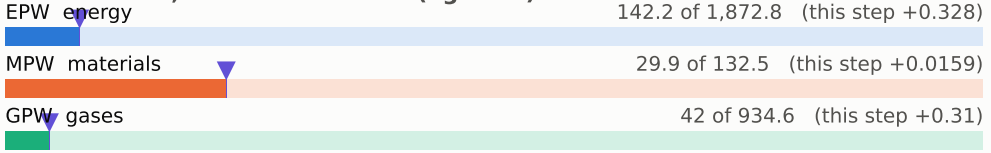

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

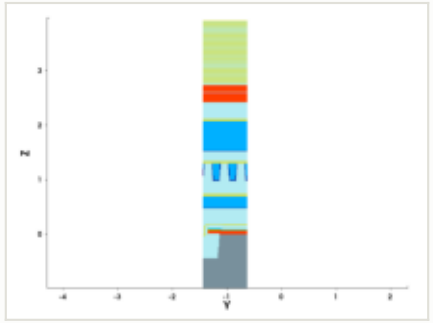

y cut at -1.035 µm

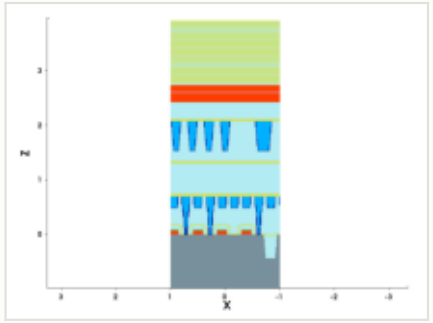

mask for this step

no mask for this step

steps by process area

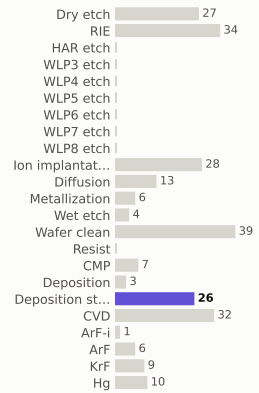

materials deposited (g)

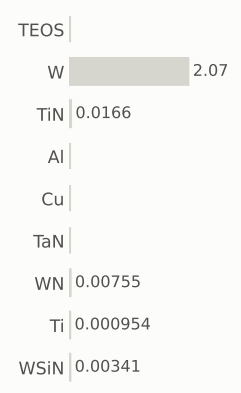

gases emitted (g)

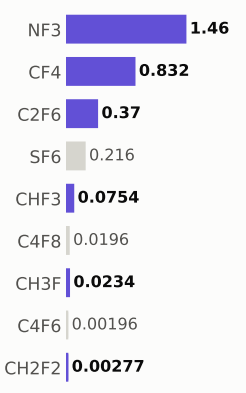

Step #2820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	214.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

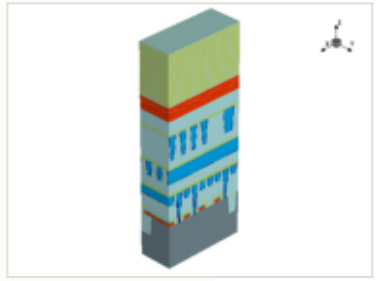

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

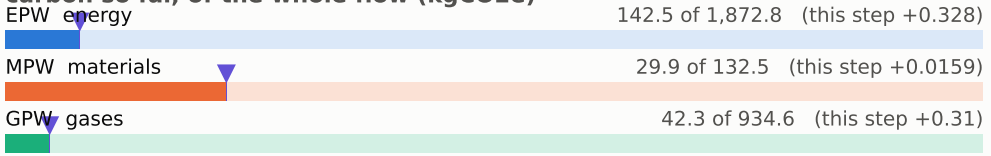

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

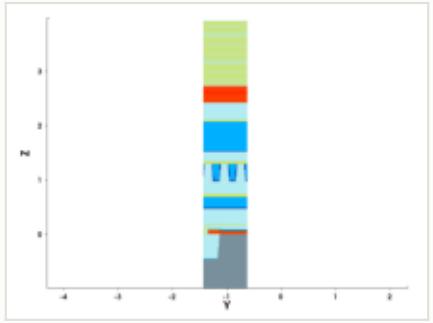

y cut at -1.035 µm

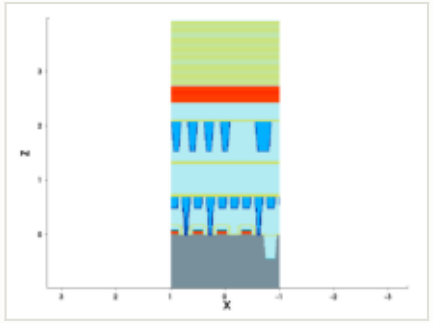

mask for this step

no mask for this step

steps by process area

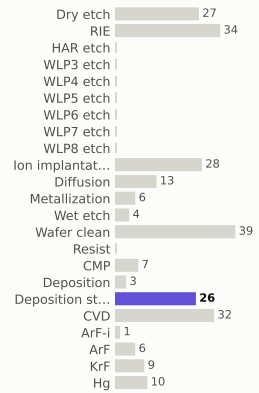

materials deposited (g)

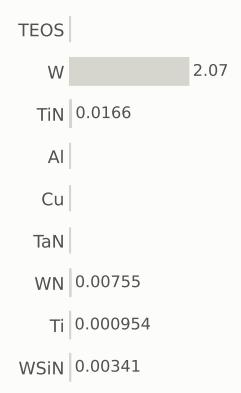

gases emitted (g)

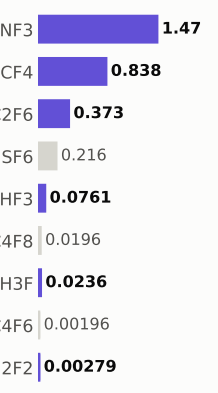

Step #2830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	215.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

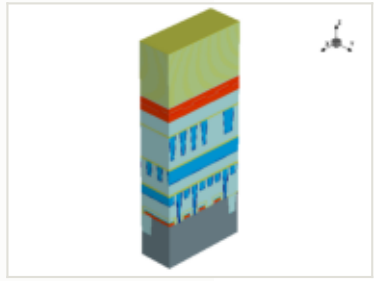

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

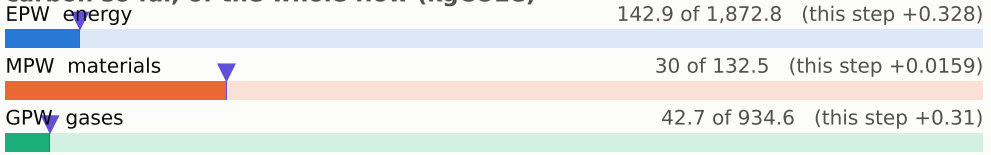

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

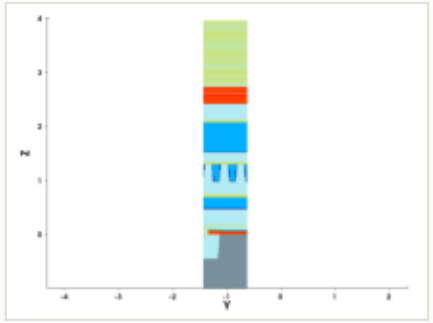

y cut at -1.035 µm

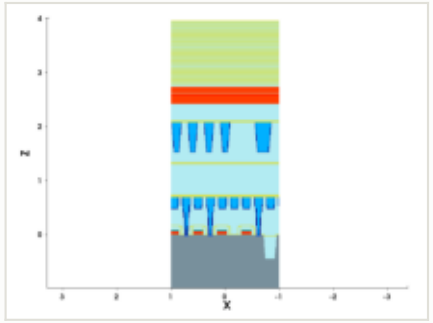

mask for this step

no mask for this step

steps by process area

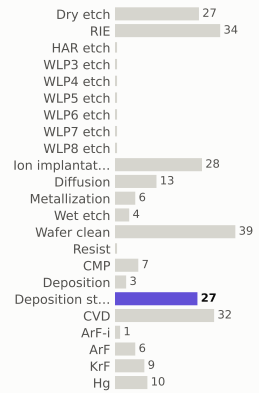

materials deposited (g)

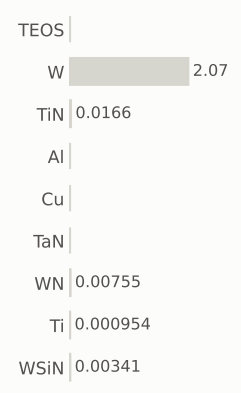

gases emitted (g)

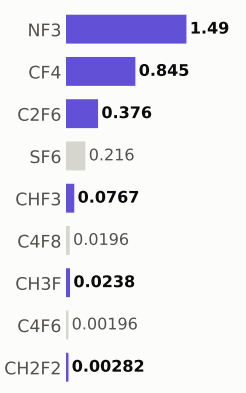

Step #2840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	216.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

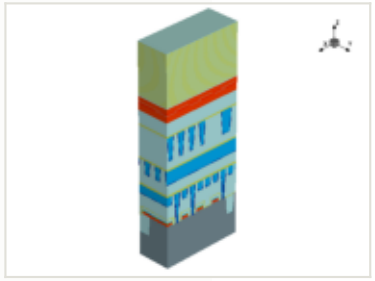

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

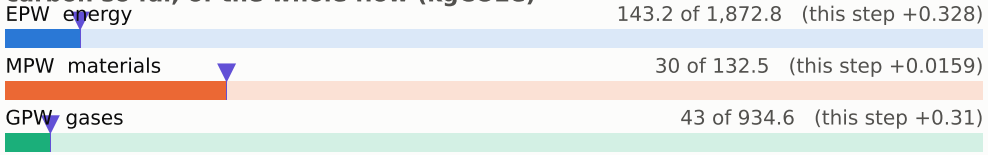

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

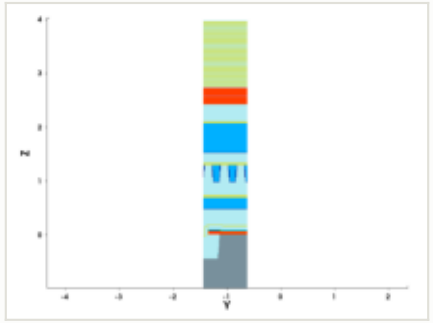

y cut at -1.035 µm

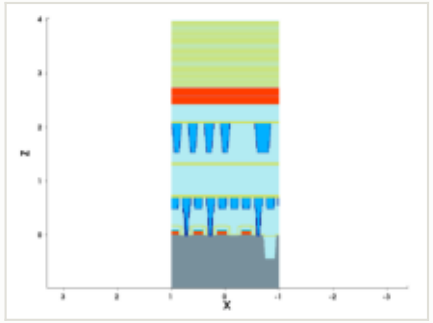

mask for this step

no mask for this step

steps by process area

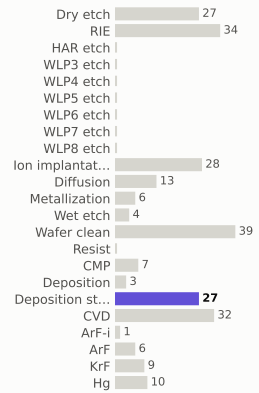

materials deposited (g)

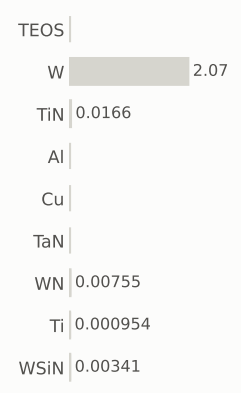

gases emitted (g)



Step #2850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	216.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

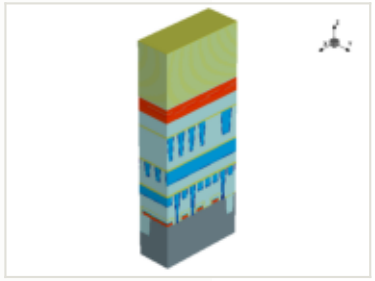

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

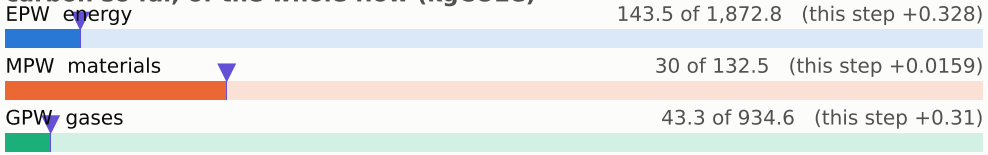

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

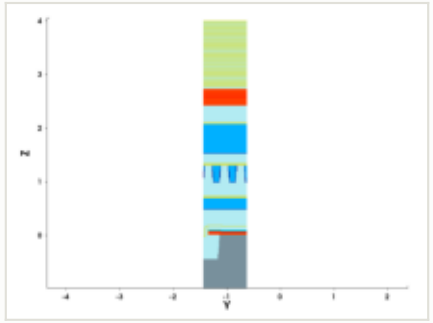

y cut at -1.035 µm

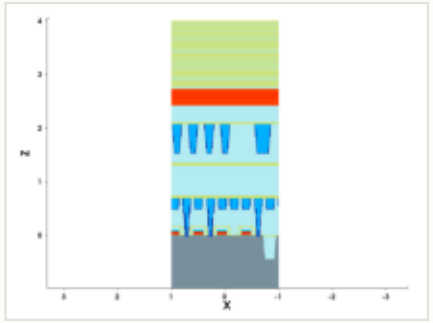

mask for this step

no mask for this step

steps by process area

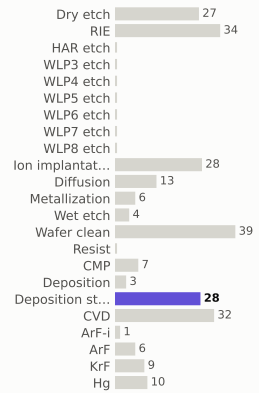

materials deposited (g)

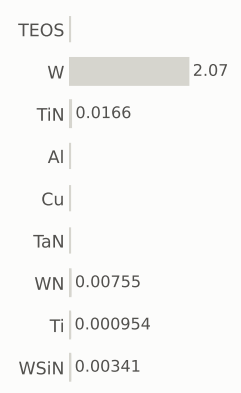

gases emitted (g)

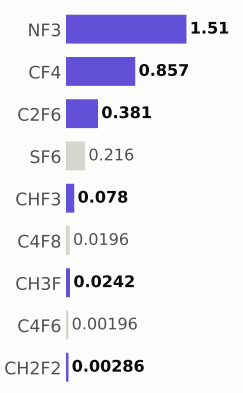

Step #2860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	217.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

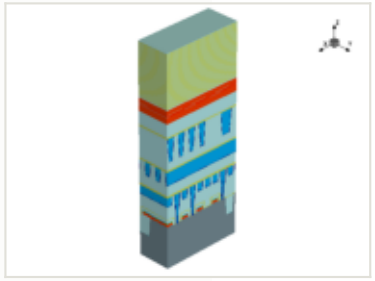

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

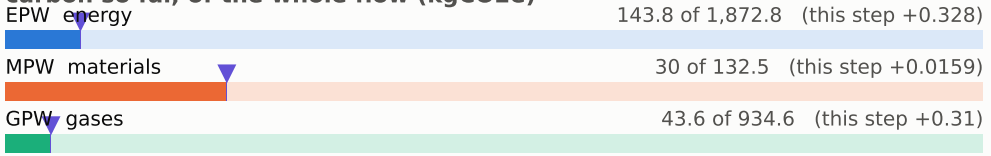

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

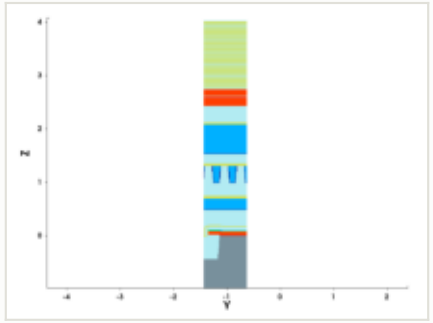

y cut at -1.035 µm

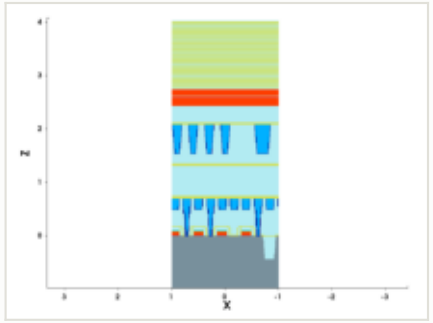

mask for this step

no mask for this step

steps by process area

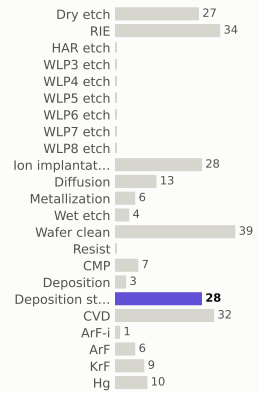

materials deposited (g)

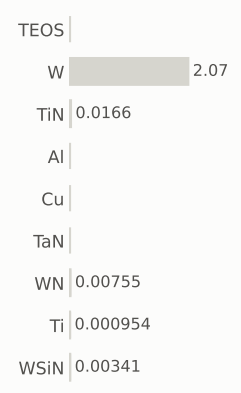

gases emitted (g)

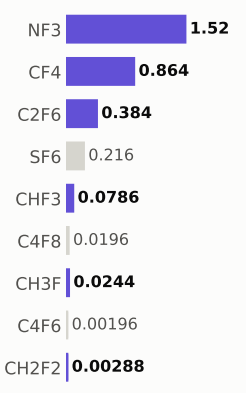

Step #2870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	218.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

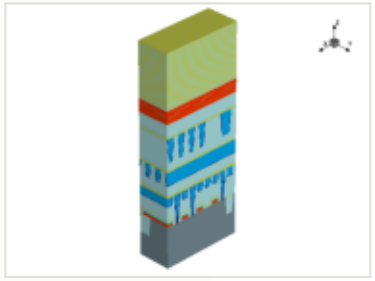

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

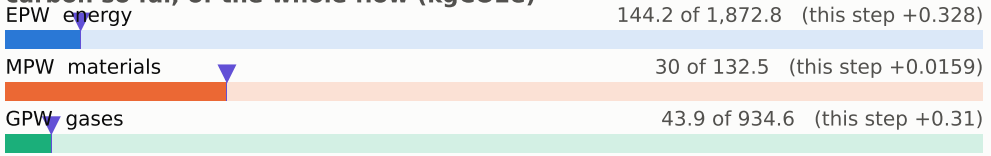

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

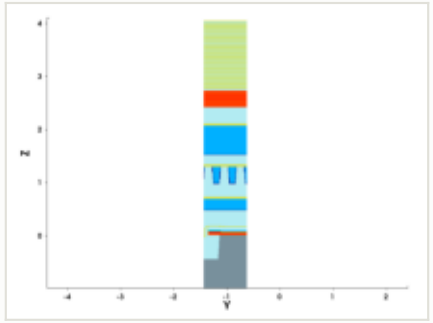

y cut at -1.035 µm

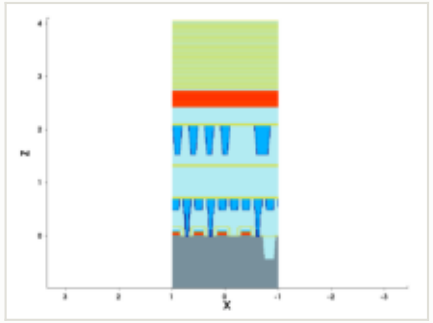

mask for this step

no mask for this step

steps by process area

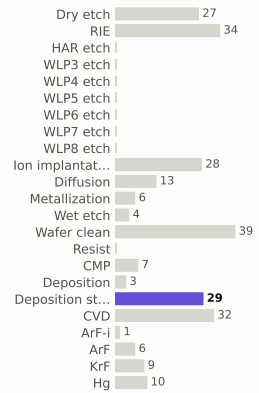

materials deposited (g)

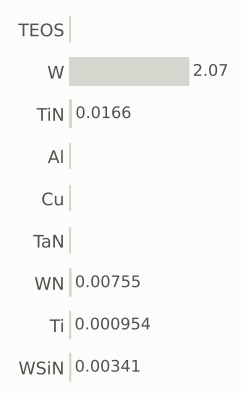

gases emitted (g)

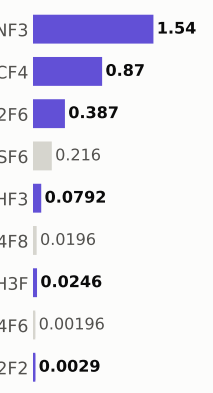

Step #2880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	218.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

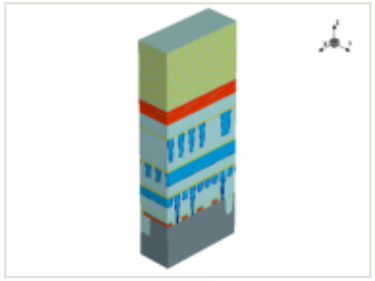

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

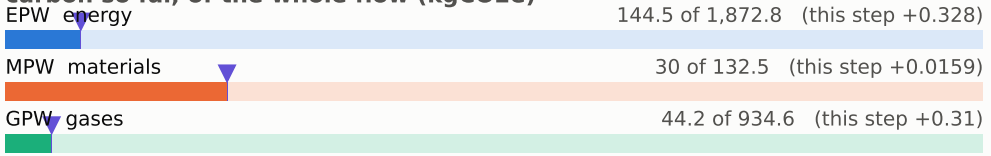

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

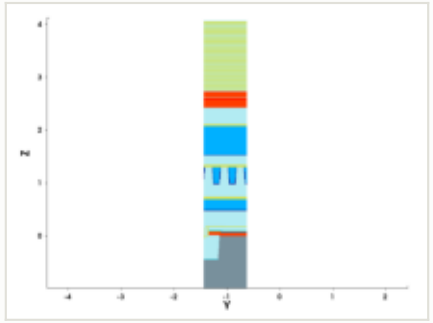

y cut at -1.035 µm

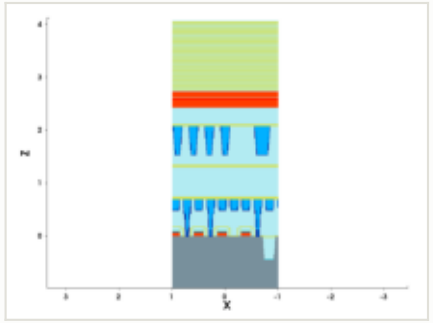

mask for this step

no mask for this step

steps by process area

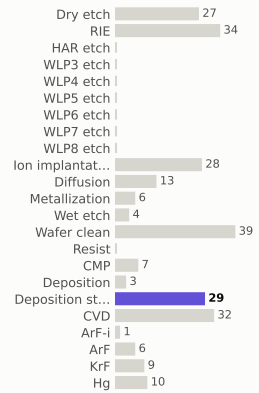

materials deposited (g)

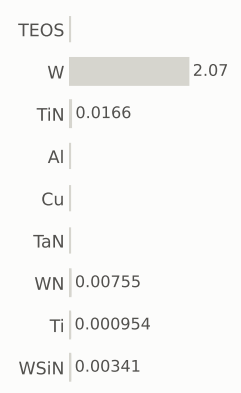

gases emitted (g)

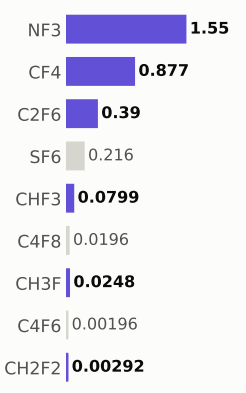

Step #2890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	219.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

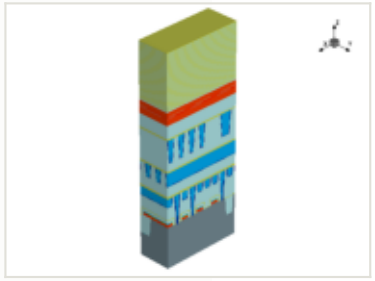

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

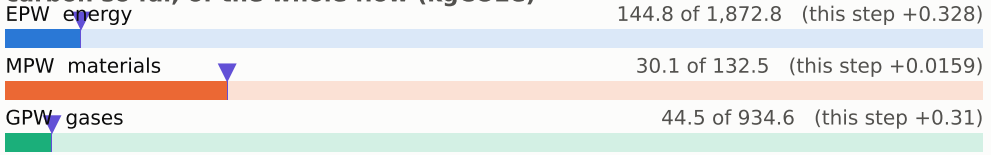

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

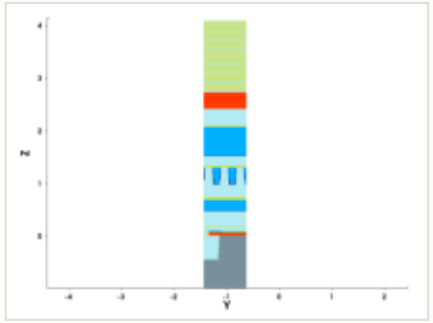

y cut at -1.035 µm

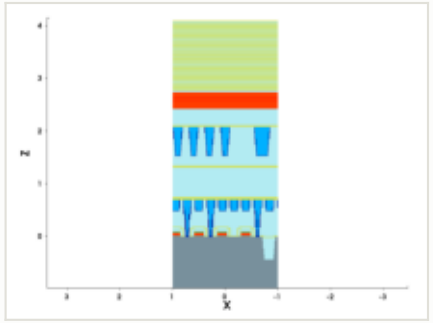

mask for this step

no mask for this step

steps by process area

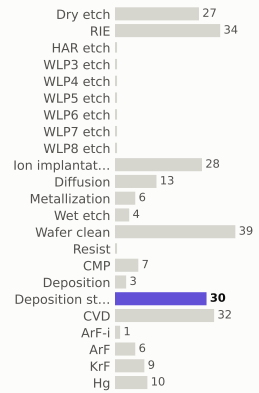

materials deposited (g)

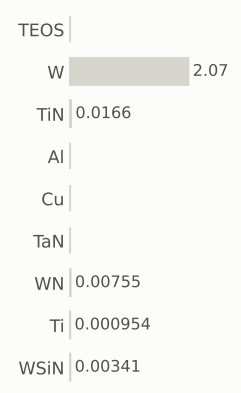

gases emitted (g)

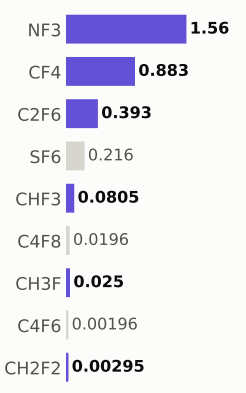

Step #2900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	220.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

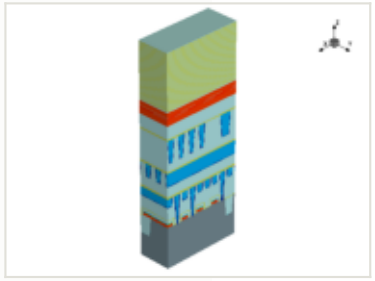

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

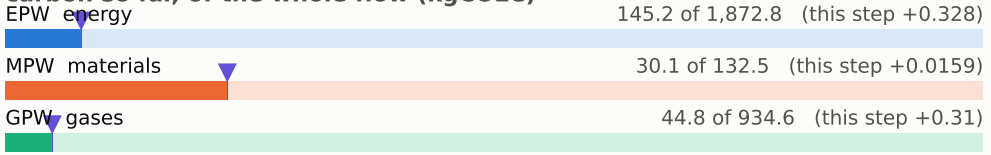

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

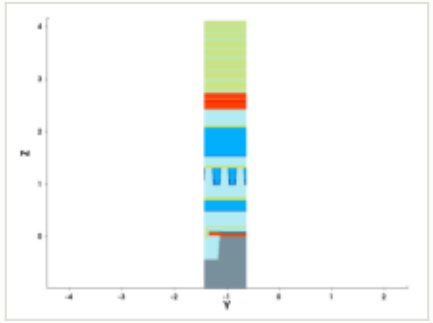

y cut at -1.035 µm

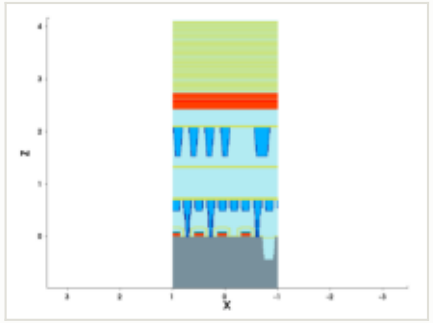

mask for this step

no mask for this step

steps by process area

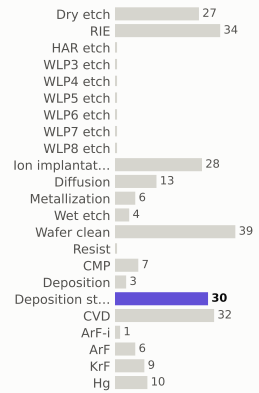

materials deposited (g)

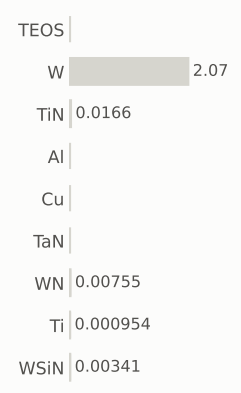

gases emitted (g)

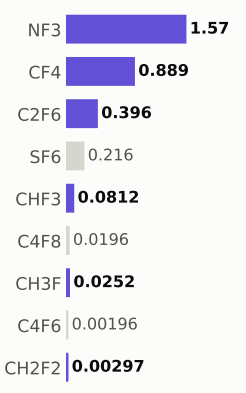

Step #2910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	220.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

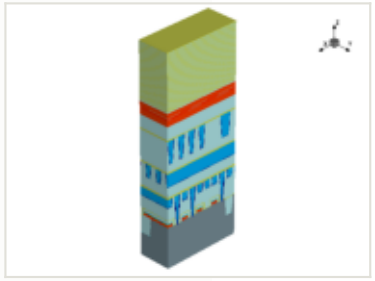

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

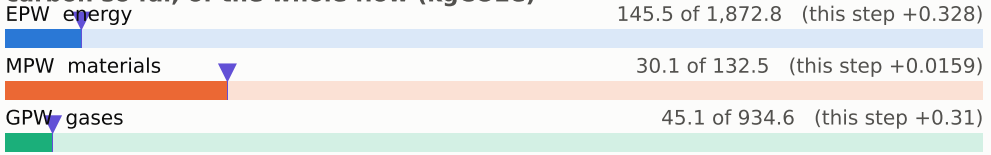

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

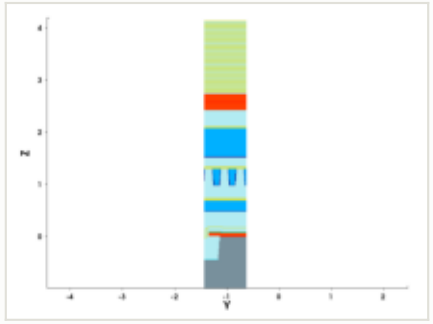

y cut at -1.035 µm

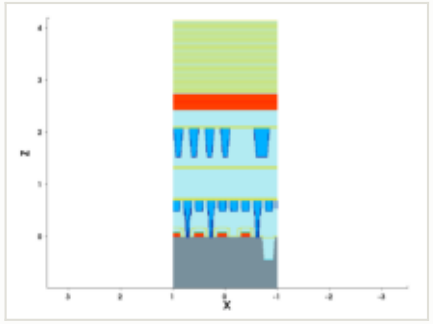

mask for this step

no mask for this step

steps by process area

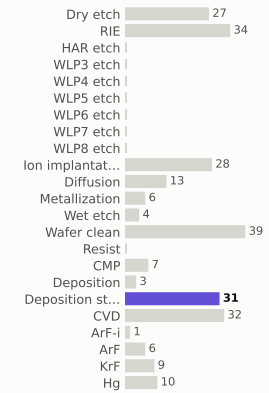

materials deposited (g)

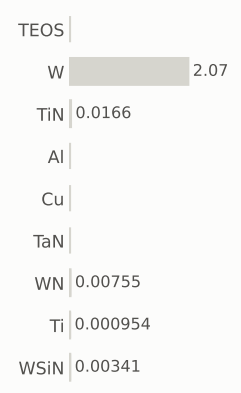

gases emitted (g)

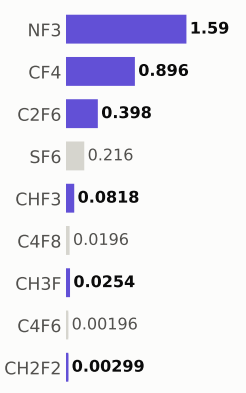

Step #2920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	221.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

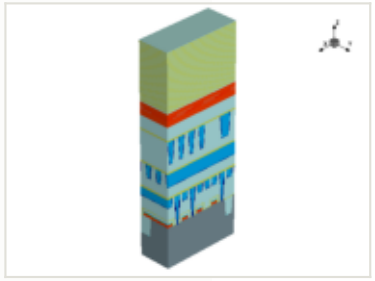

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

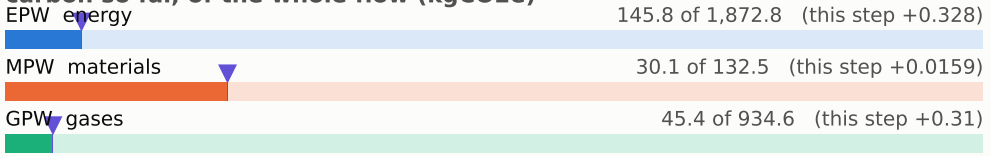

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

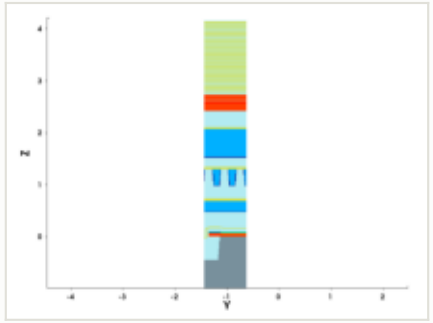

y cut at -1.035 µm

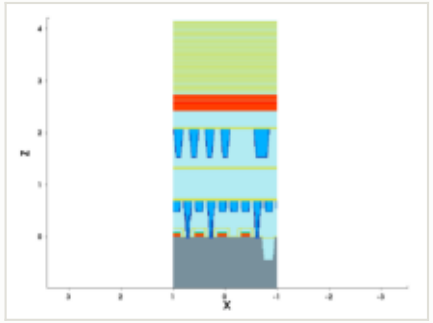

mask for this step

no mask for this step

steps by process area

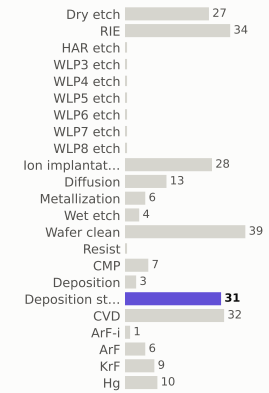

materials deposited (g)

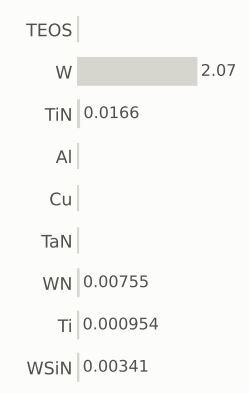

gases emitted (g)

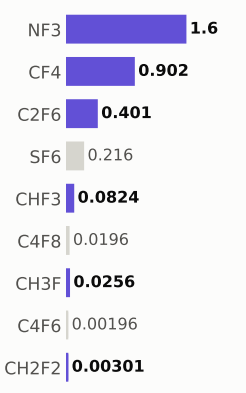

Step #2930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	222.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

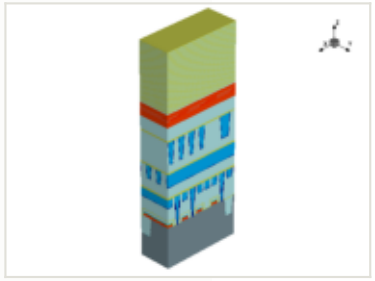

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

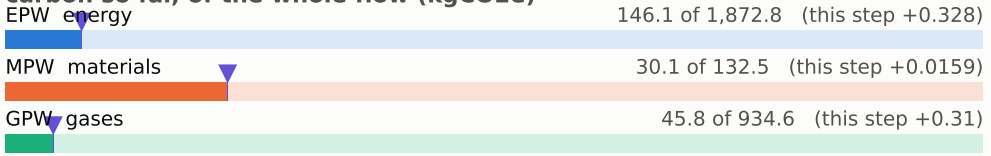

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

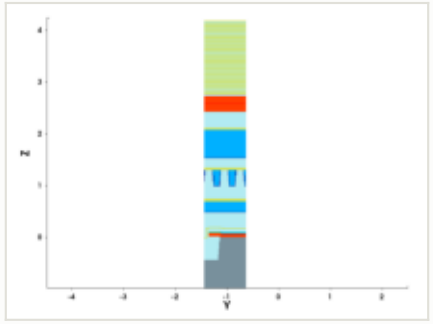

y cut at -1.035 µm

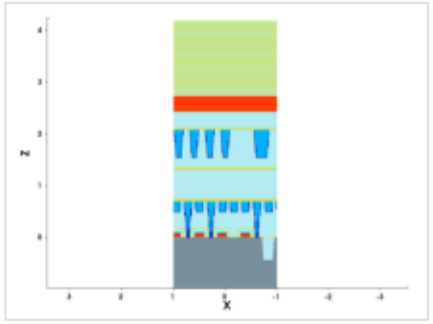

mask for this step

no mask for this step

steps by process area

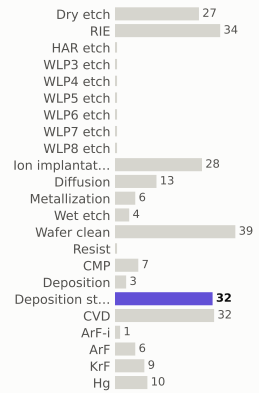

materials deposited (g)

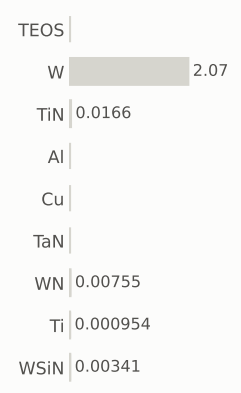

gases emitted (g)

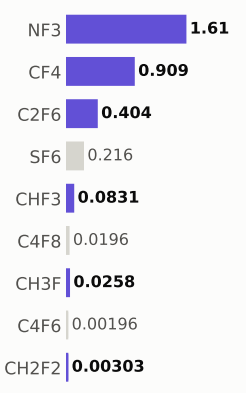

Step #2940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	222.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

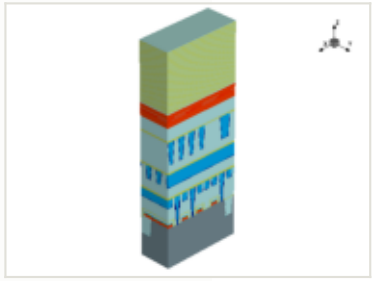

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

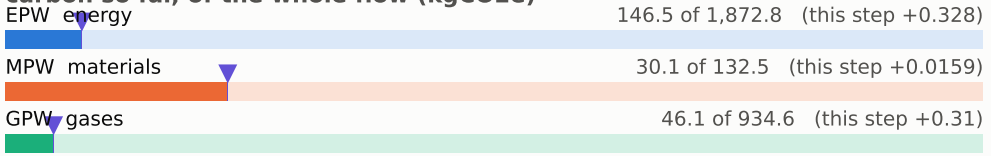

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

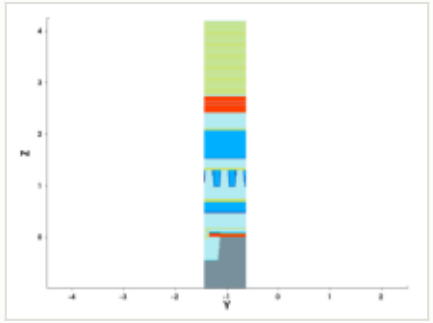

y cut at -1.035 µm

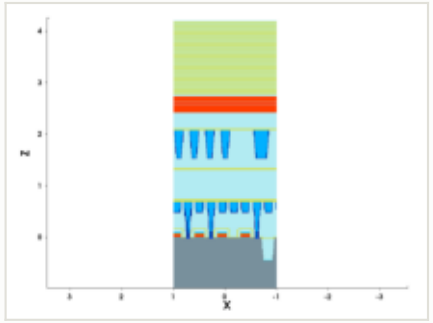

mask for this step

no mask for this step

steps by process area

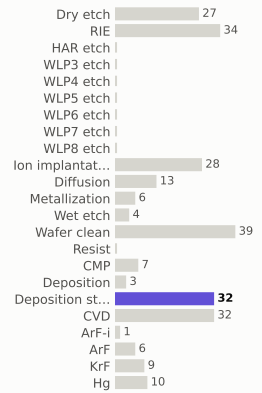

materials deposited (g)

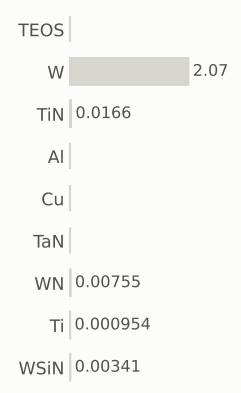

gases emitted (g)

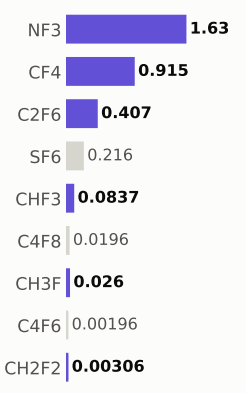

Step #2950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	223.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

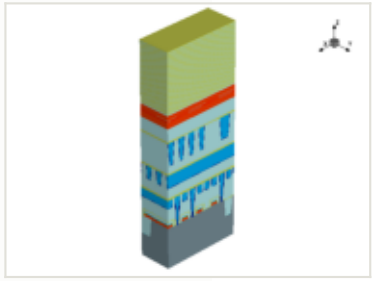

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

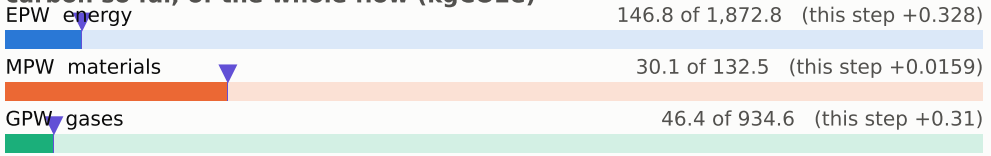

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

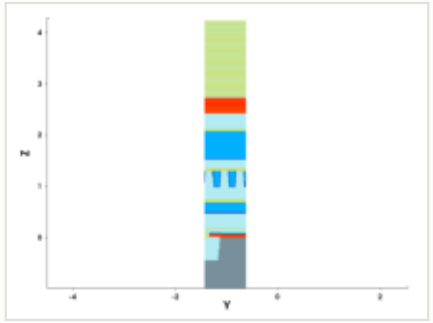

y cut at -1.035 µm

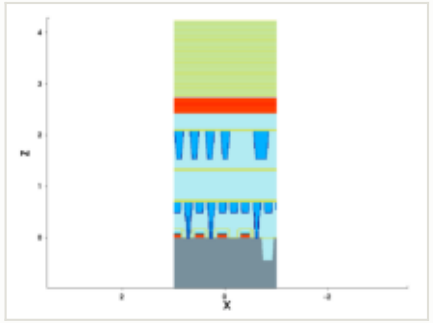

mask for this step

no mask for this step

steps by process area

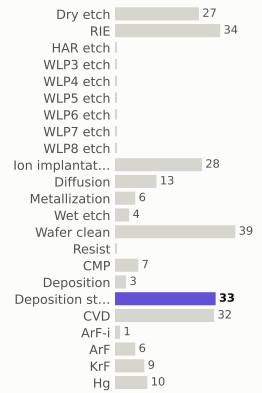

materials deposited (g)

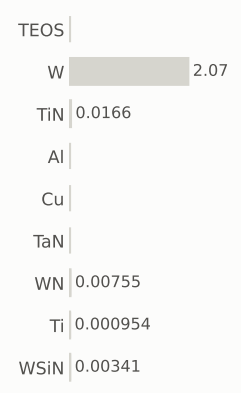

gases emitted (g)

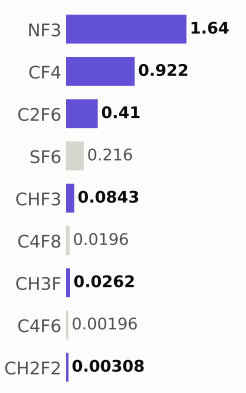

Step #2960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	224.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

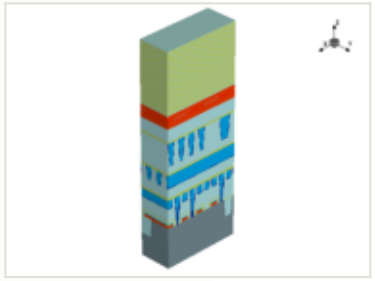

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

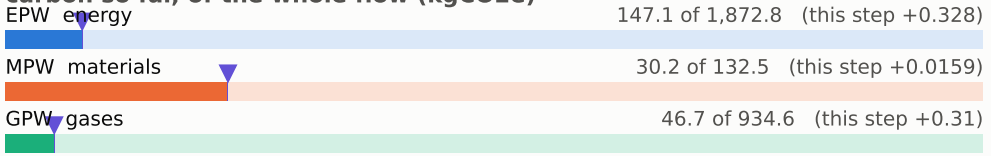

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

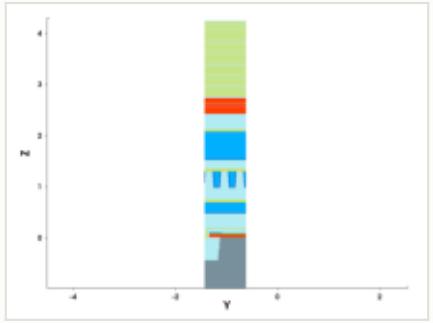

y cut at -1.035 µm

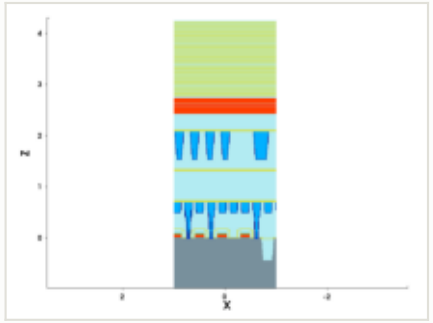

mask for this step

no mask for this step

steps by process area

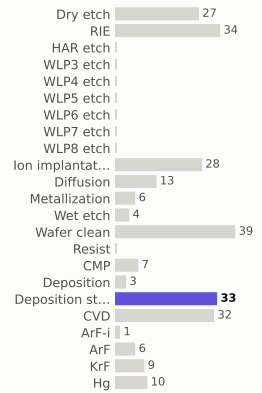

materials deposited (g)

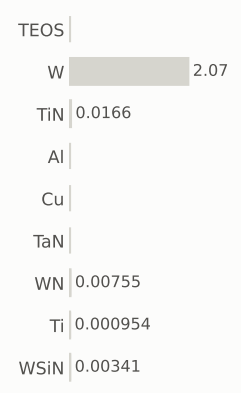

gases emitted (g)

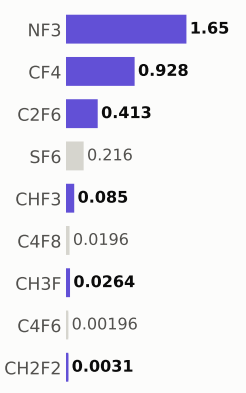

Step #2970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	224.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

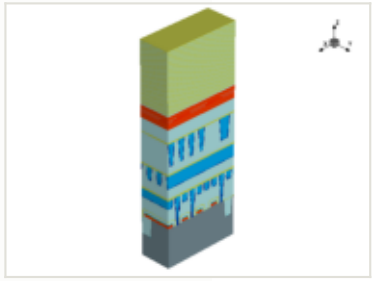

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

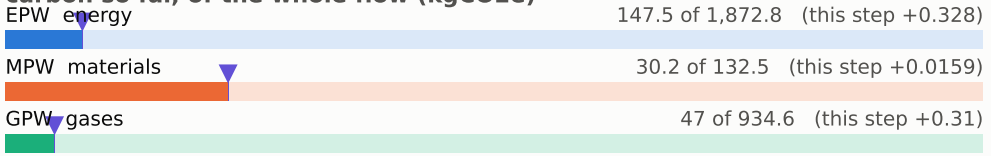

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

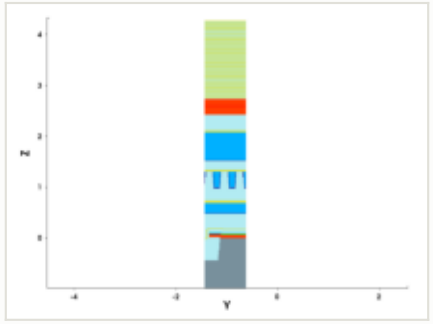

y cut at -1.035 µm

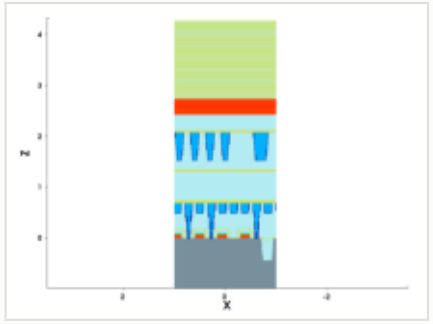

mask for this step

no mask for this step

steps by process area

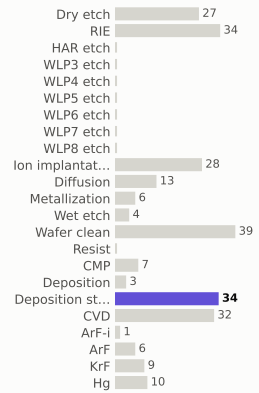

materials deposited (g)

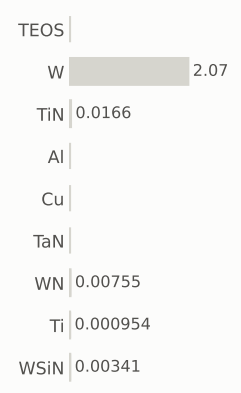

gases emitted (g)

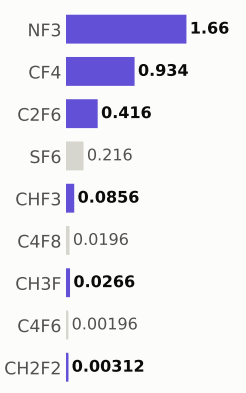

Step #2980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	225.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

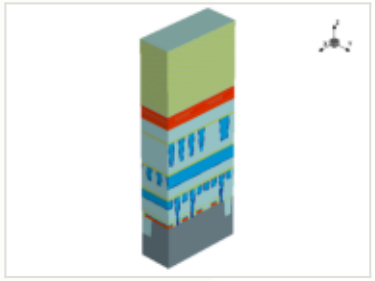

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

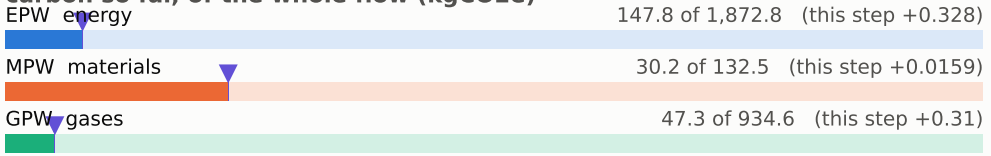

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

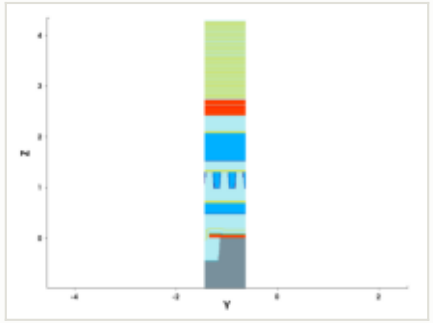

y cut at -1.035 µm

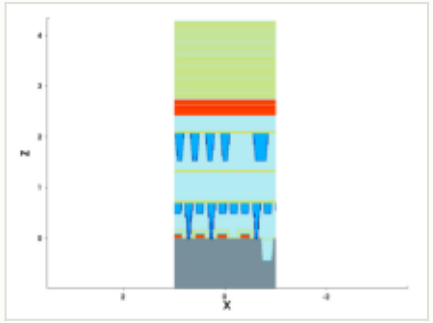

mask for this step

no mask for this step

steps by process area

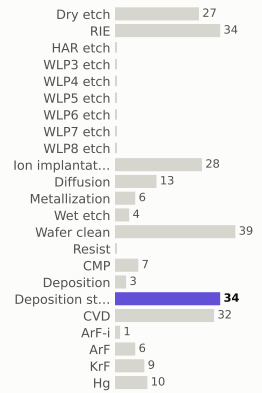

materials deposited (g)

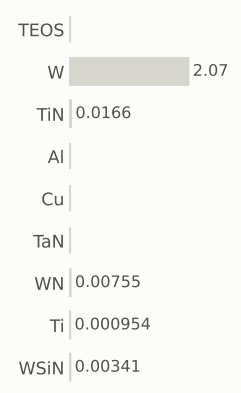

gases emitted (g)

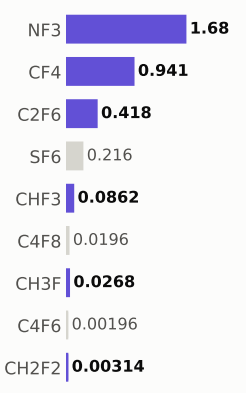

Step #2990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	225.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

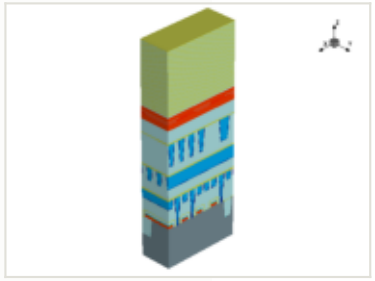

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

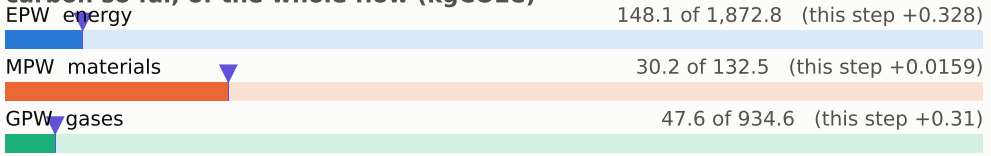

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

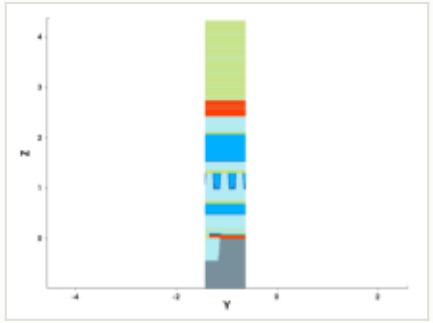

y cut at -1.035 µm

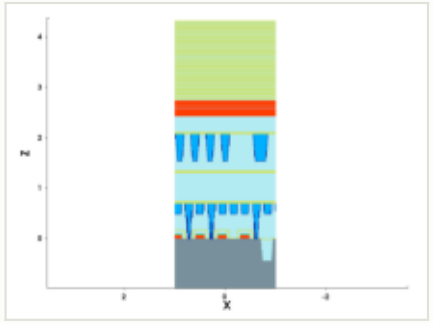

mask for this step

no mask for this step

steps by process area

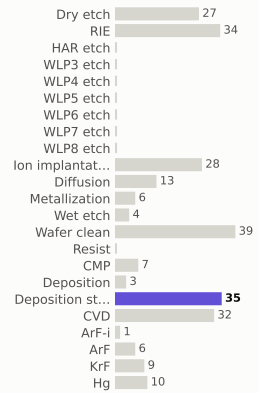

materials deposited (g)

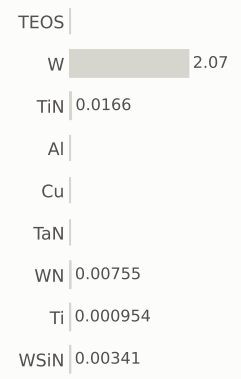

gases emitted (g)



Step #3000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	226.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

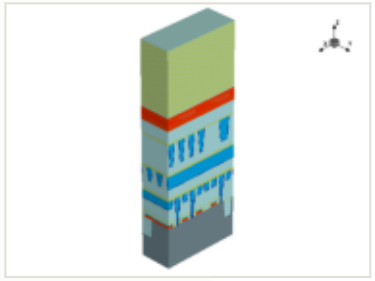

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

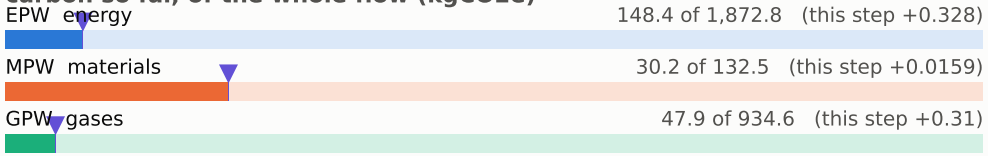

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

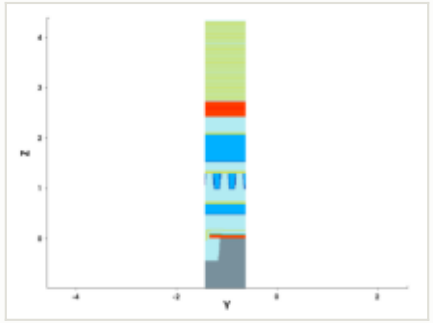

y cut at -1.035 µm

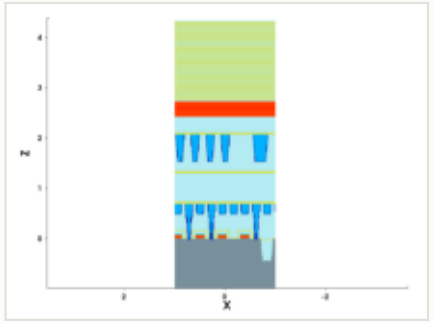

mask for this step

no mask for this step

steps by process area

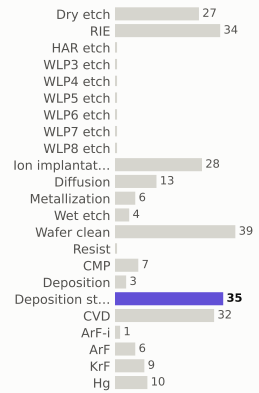

materials deposited (g)

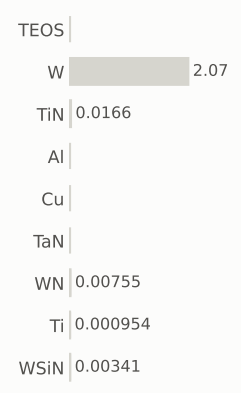

gases emitted (g)



Step #3010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	227.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

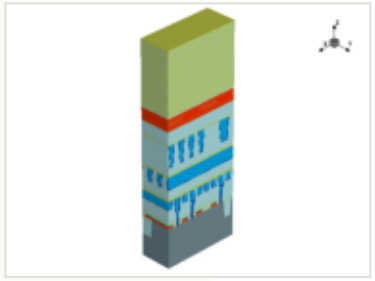

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

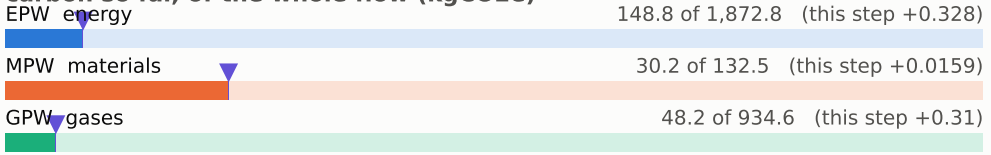

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

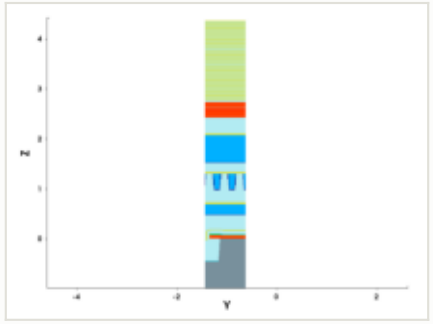

y cut at -1.035 µm

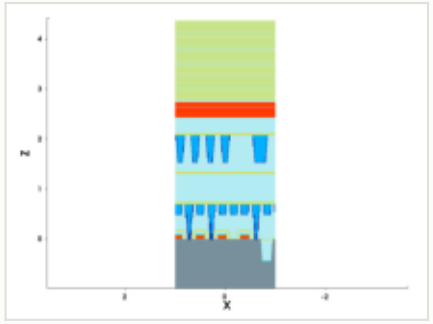

mask for this step

no mask for this step

steps by process area

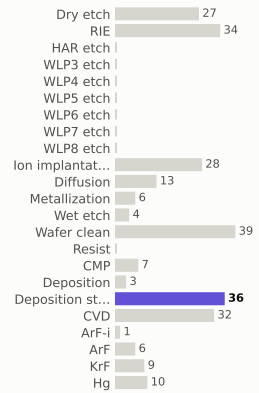

materials deposited (g)

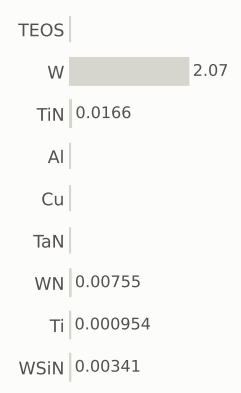

gases emitted (g)

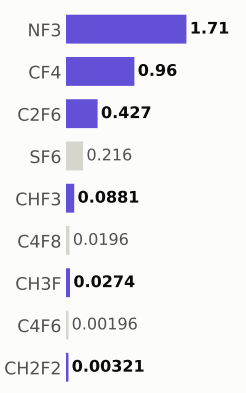

Step #3020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	227.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

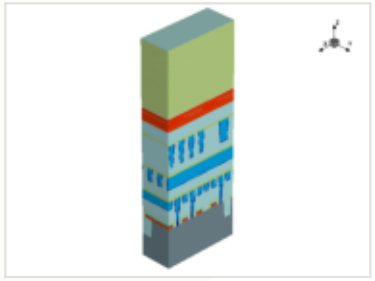

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

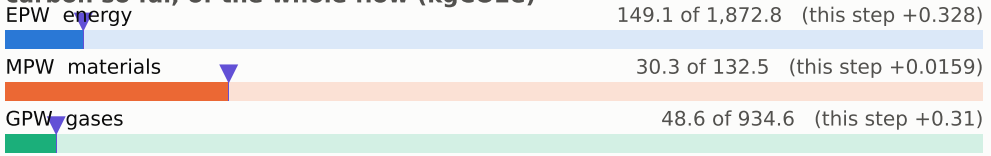

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

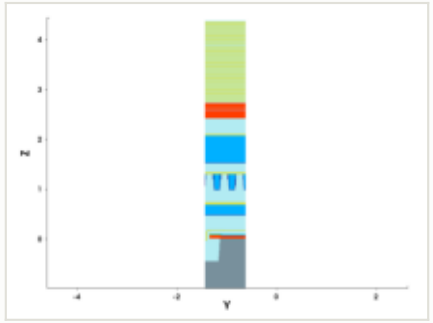

y cut at -1.035 µm

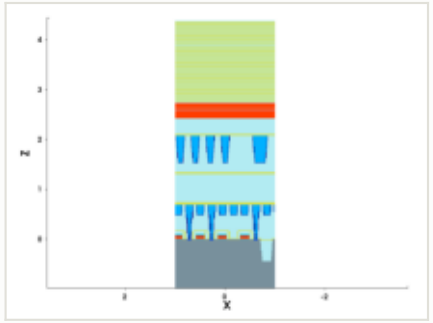

mask for this step

no mask for this step

steps by process area

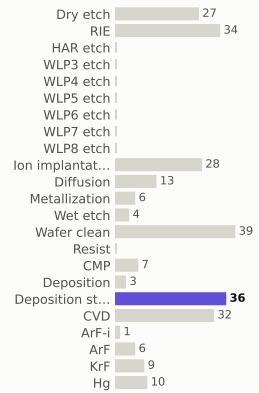

materials deposited (g)

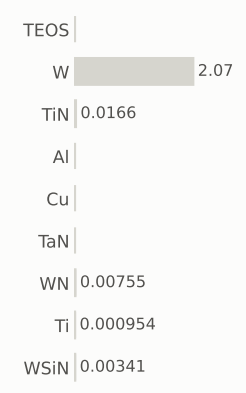

gases emitted (g)

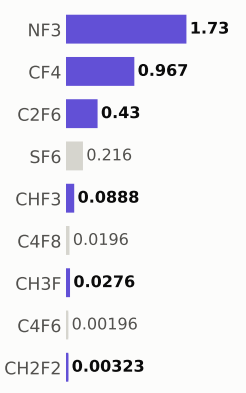

Step #3030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	228.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

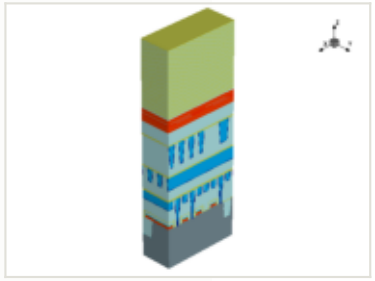

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

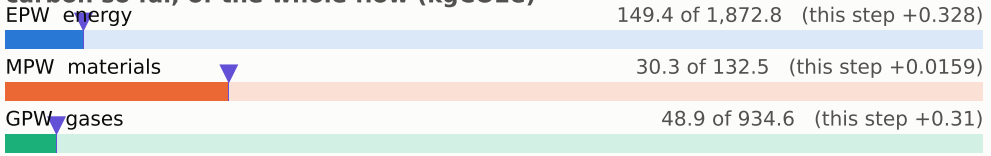

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

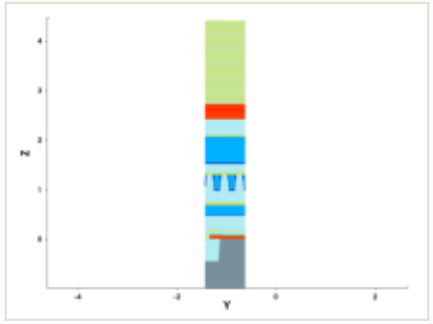

y cut at -1.035 µm

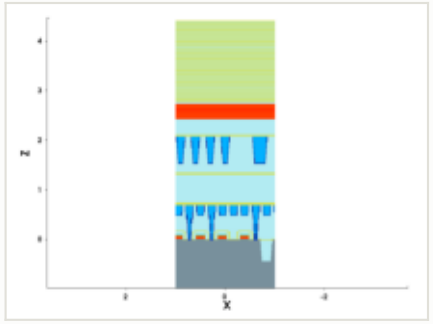

mask for this step

no mask for this step

steps by process area

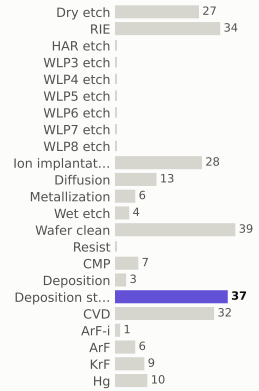

materials deposited (g)

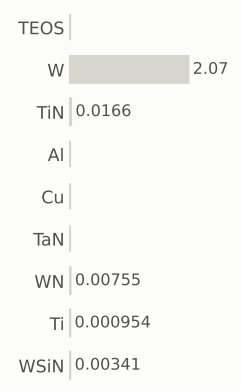

gases emitted (g)

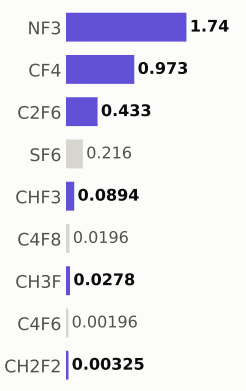

Step #3040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	229.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

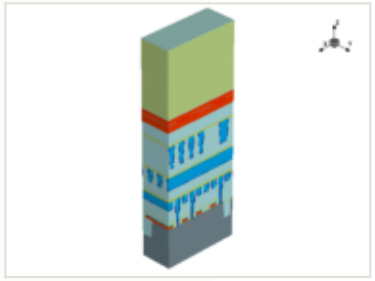

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

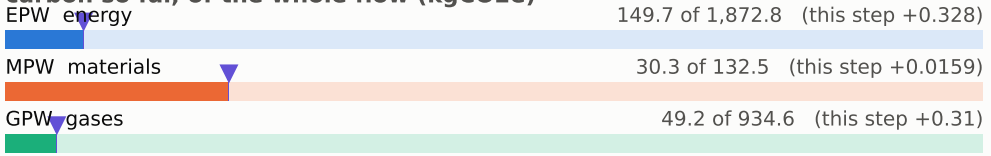

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

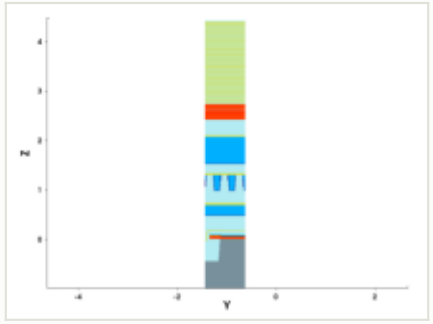

y cut at -1.035 µm

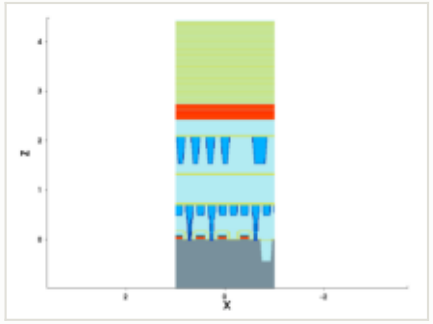

mask for this step

no mask for this step

steps by process area

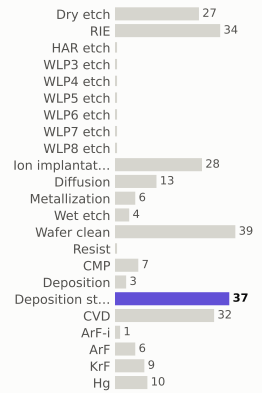

materials deposited (g)

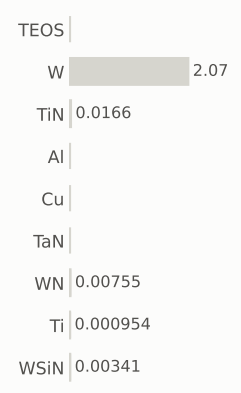

gases emitted (g)

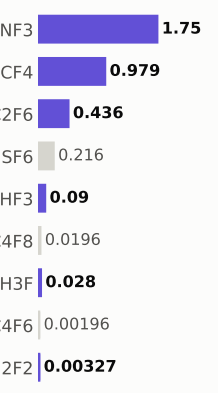

Step #3050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	229.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

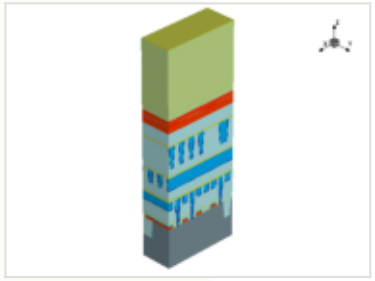

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

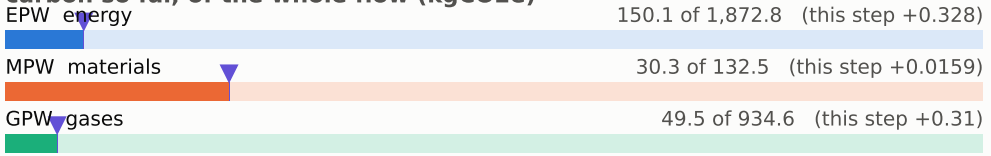

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

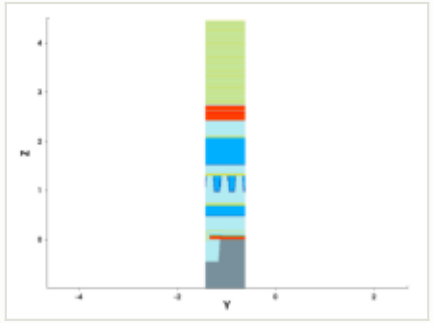

y cut at -1.035 µm

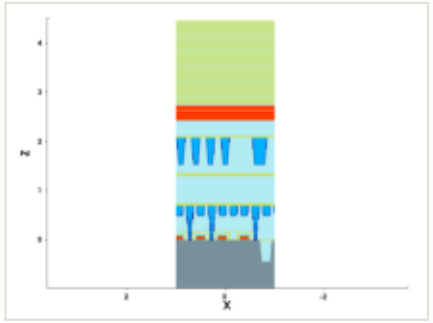

mask for this step

no mask for this step

steps by process area

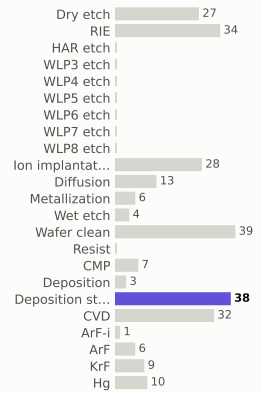

materials deposited (g)

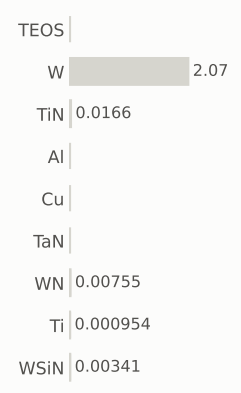

gases emitted (g)

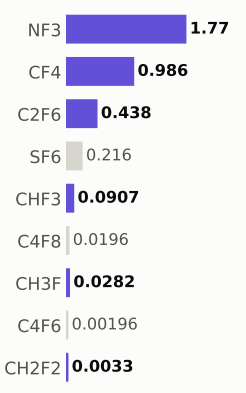

Step #3060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	230.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

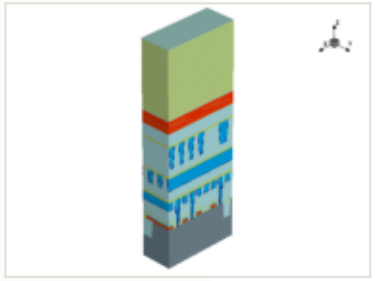

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

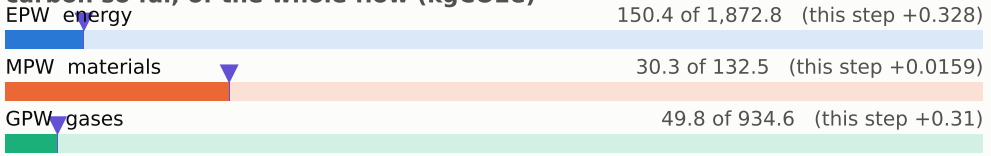

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

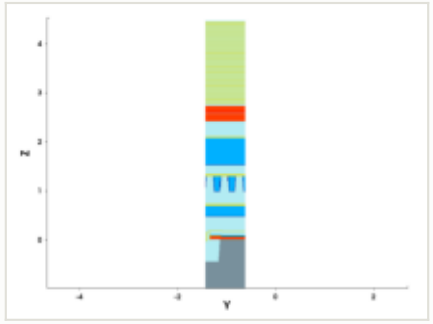

y cut at -1.035 µm

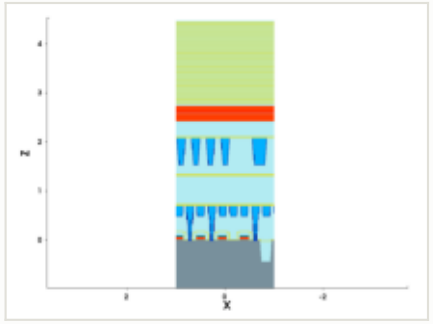

mask for this step

no mask for this step

steps by process area

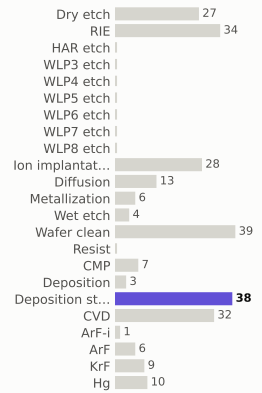

materials deposited (g)

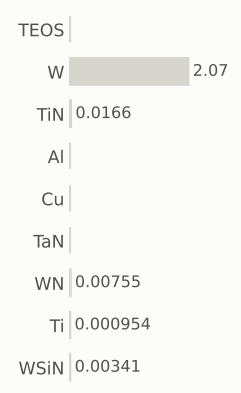

gases emitted (g)

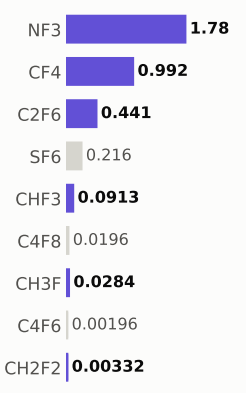

Step #3070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	231.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

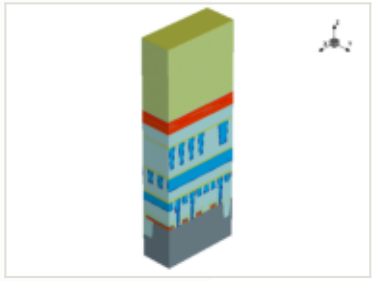

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

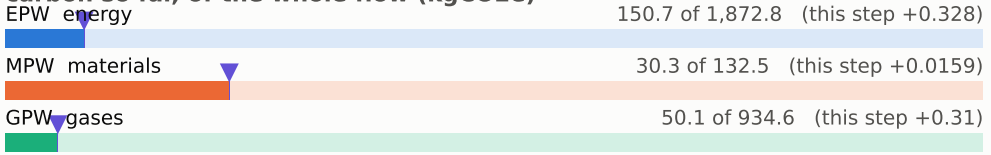

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

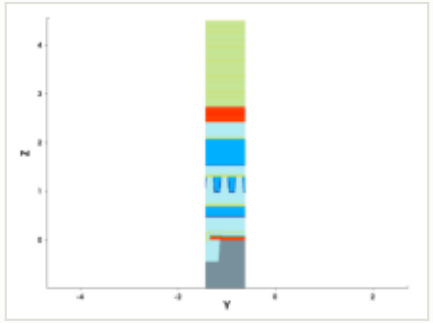

y cut at -1.035 µm

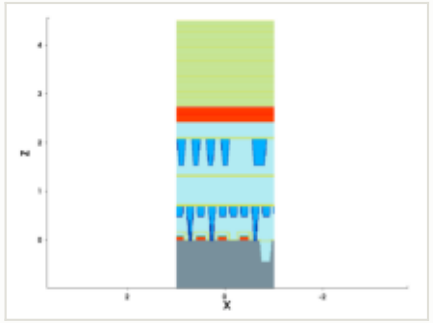

mask for this step

no mask for this step

steps by process area

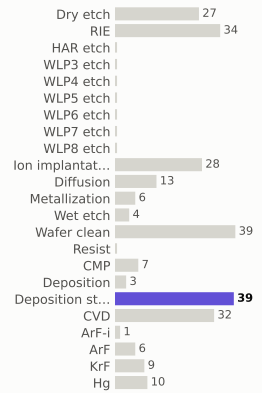

materials deposited (g)

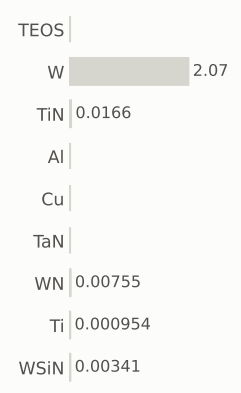

gases emitted (g)

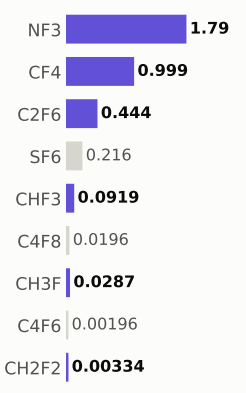

Step #3080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	231.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

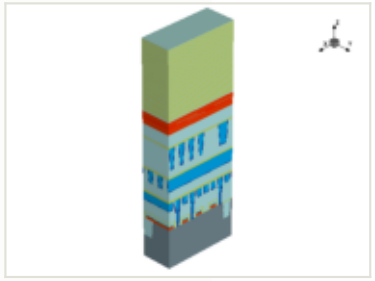

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

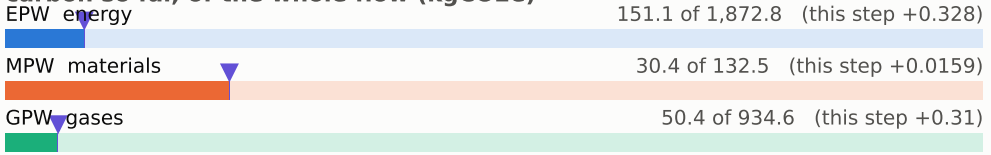

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

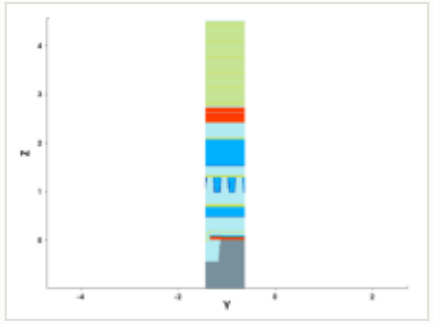

y cut at -1.035 µm

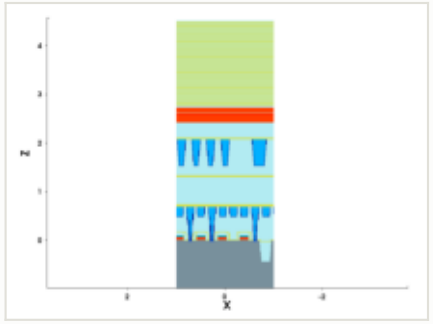

mask for this step

no mask for this step

steps by process area

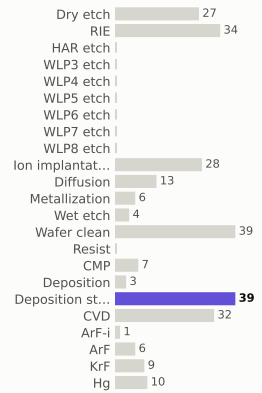

materials deposited (g)

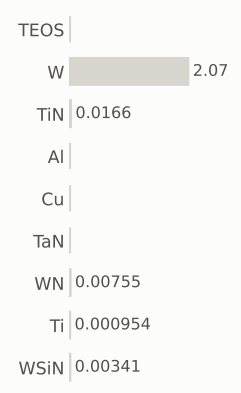

gases emitted (g)



Step #3090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	232.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

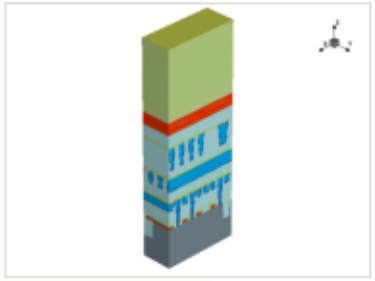

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

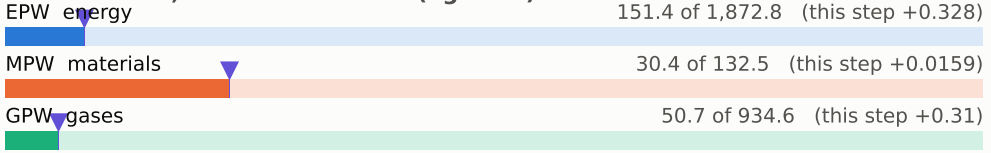

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

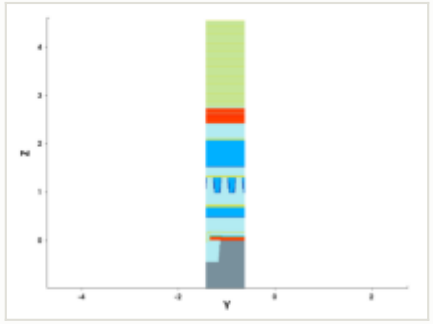

y cut at -1.035 µm

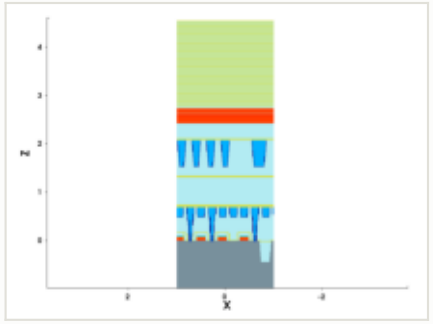

mask for this step

no mask for this step

steps by process area

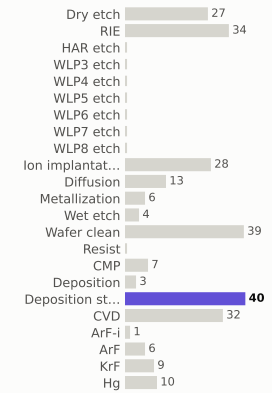

materials deposited (g)

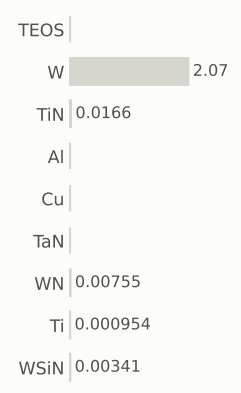

gases emitted (g)

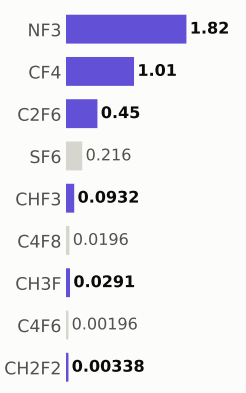

Step #3100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	233.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

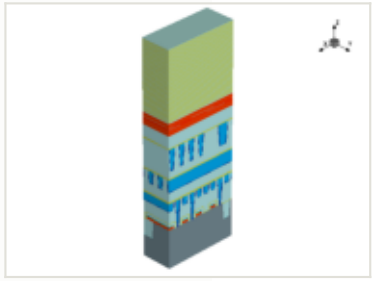

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

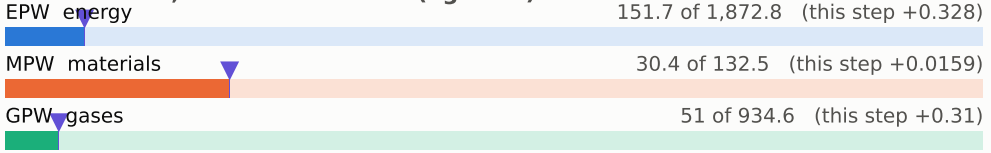

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

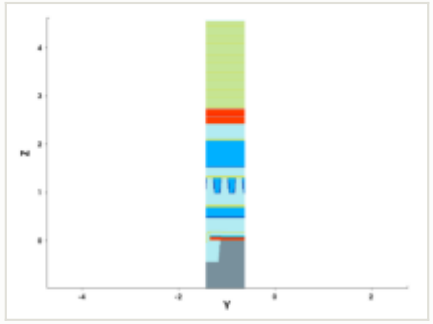

y cut at -1.035 µm

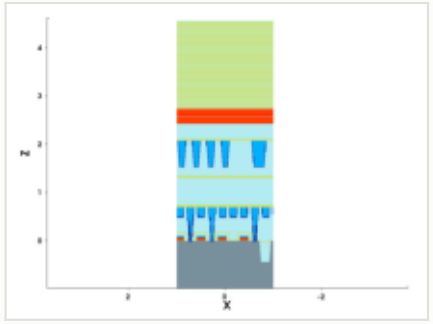

mask for this step

no mask for this step

steps by process area

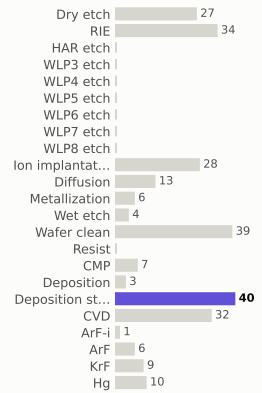

materials deposited (g)

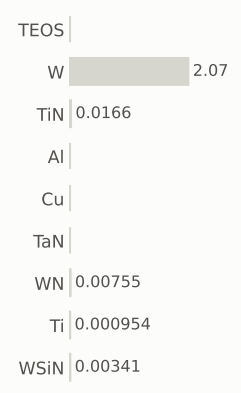

gases emitted (g)

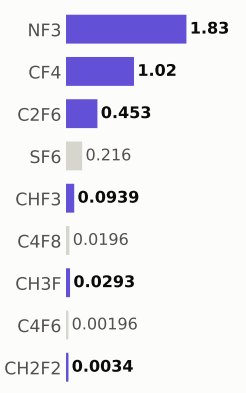

Step #3110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	233.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

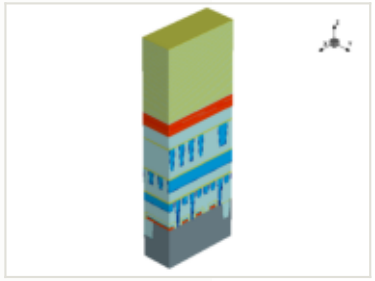

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

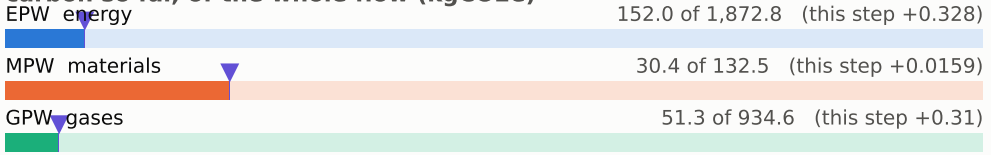

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

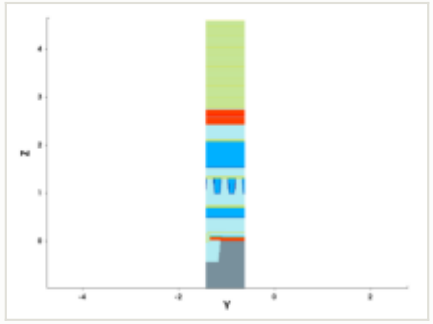

y cut at -1.035 µm

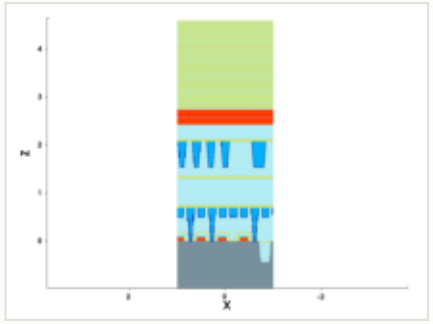

mask for this step

no mask for this step

steps by process area

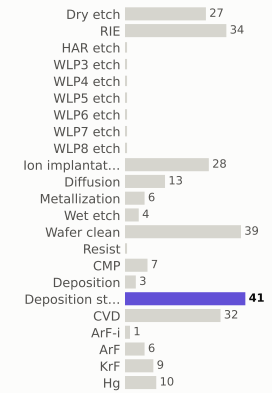

materials deposited (g)

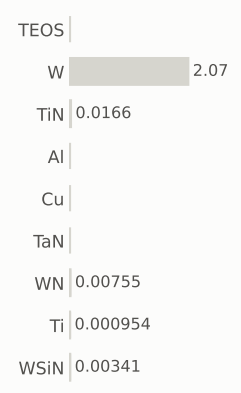

gases emitted (g)

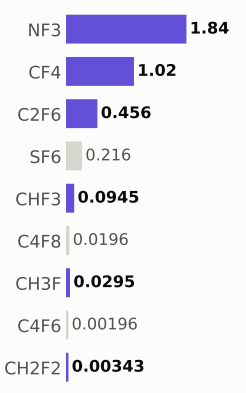

Step #3120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	234.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

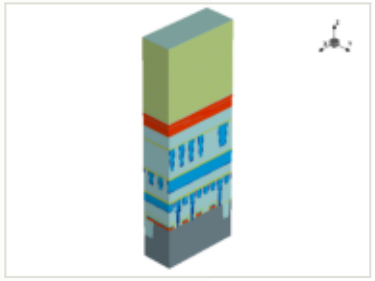

x cut at 0.000 µm

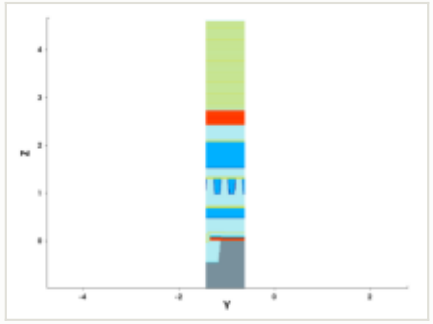

y cut at -1.035 µm

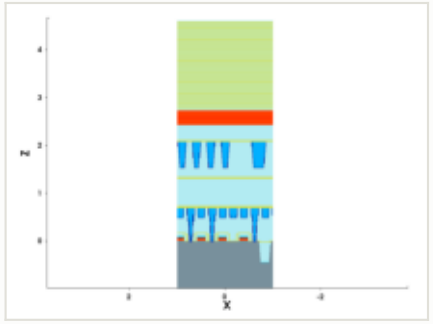

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

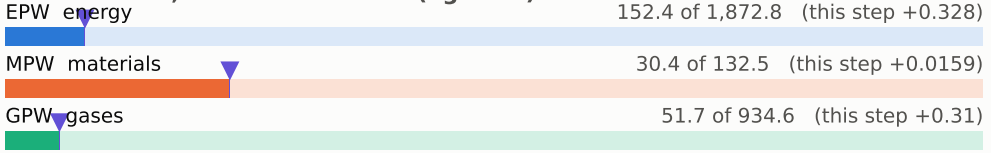

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

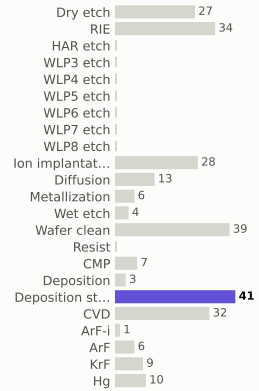

materials deposited (g)

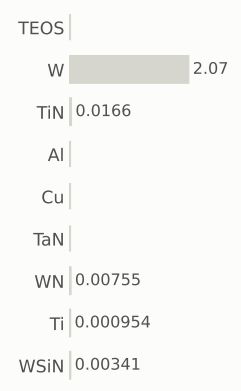

gases emitted (g)

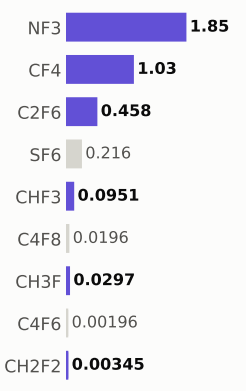

Step #3130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	235.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

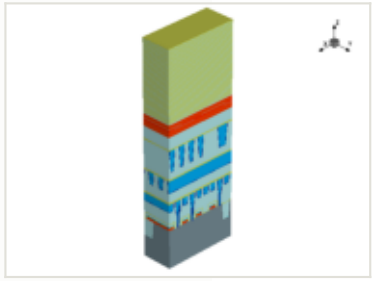

x cut at 0.000 µm

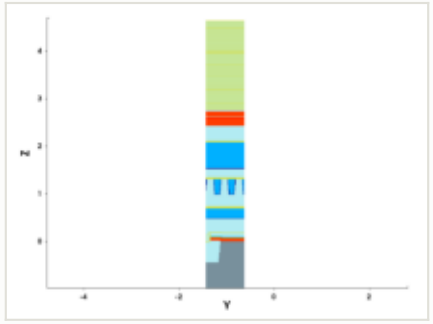

y cut at -1.035 µm

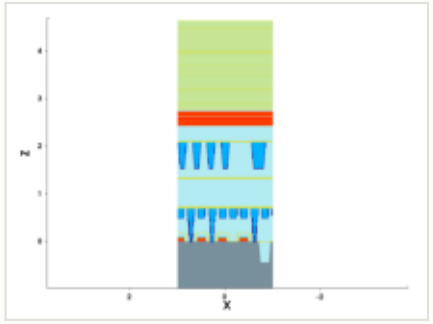

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

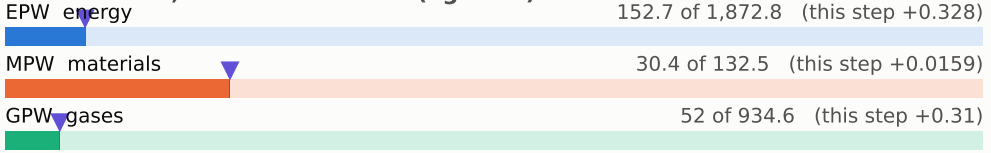

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

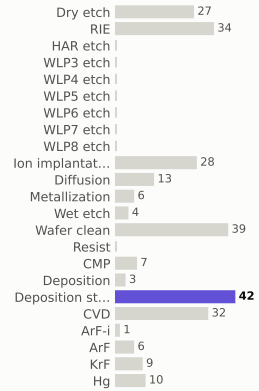

materials deposited (g)

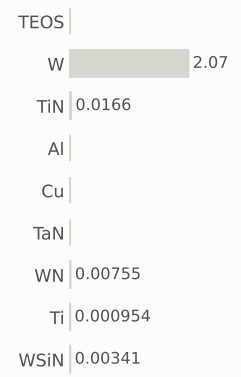

gases emitted (g)

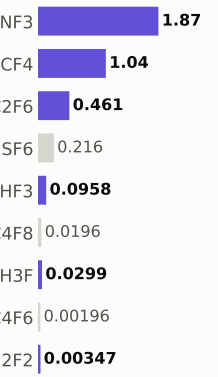

Step #3140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	235.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

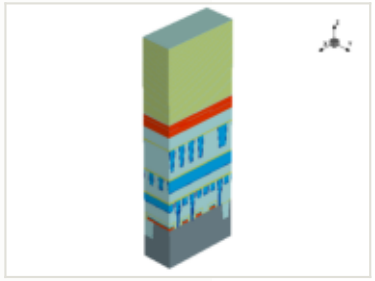

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

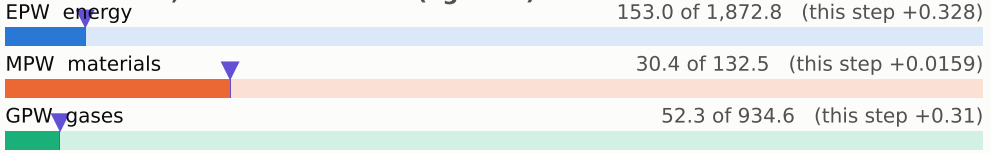

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

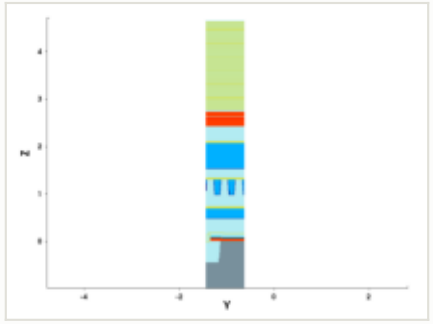

y cut at -1.035 µm

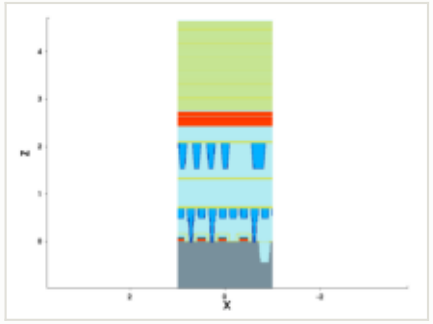

mask for this step

no mask for this step

steps by process area

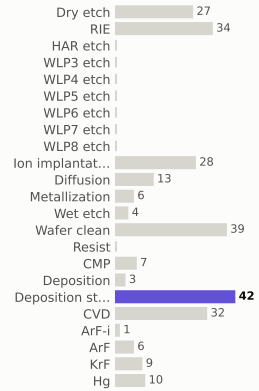

materials deposited (g)

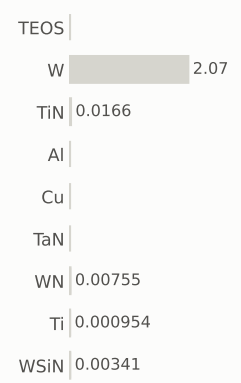

gases emitted (g)

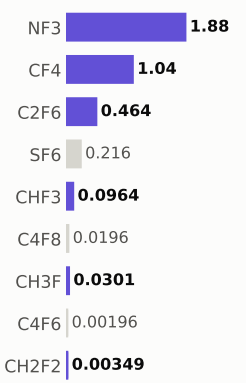

Step #3150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	236.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

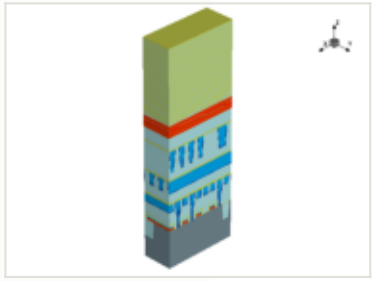

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

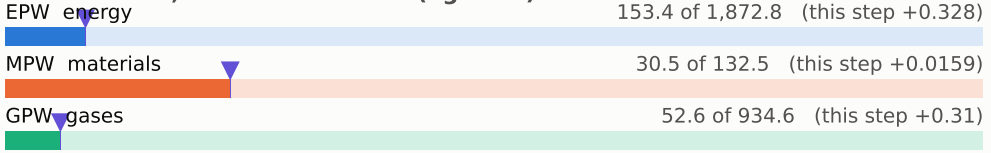

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

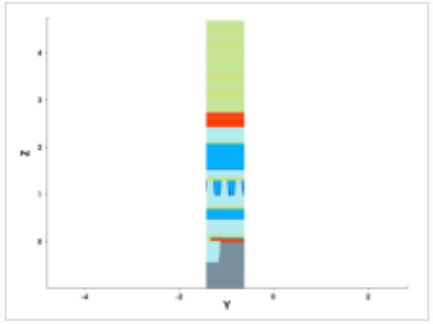

y cut at -1.035 µm

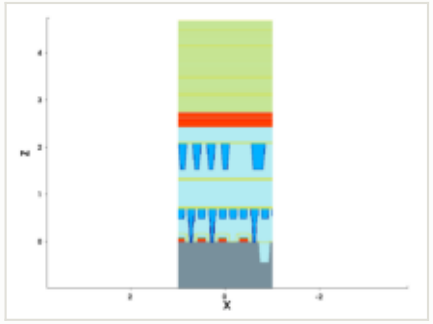

mask for this step

no mask for this step

steps by process area

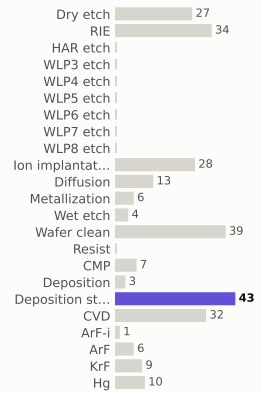

materials deposited (g)

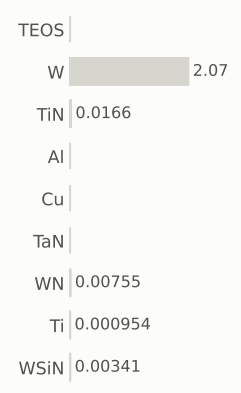

gases emitted (g)

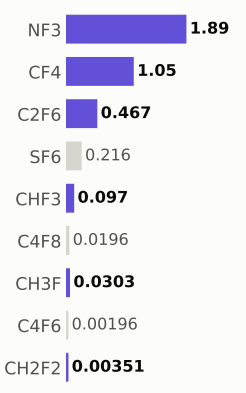

Step #3160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	237.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

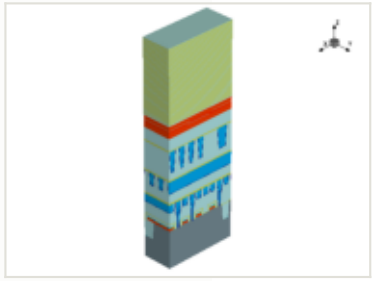

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

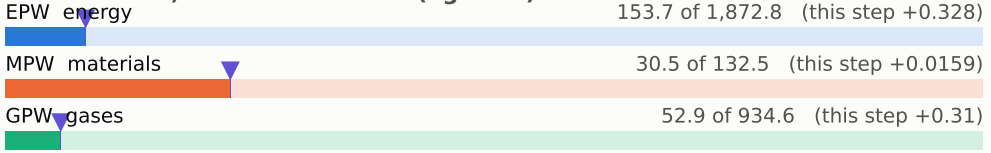

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

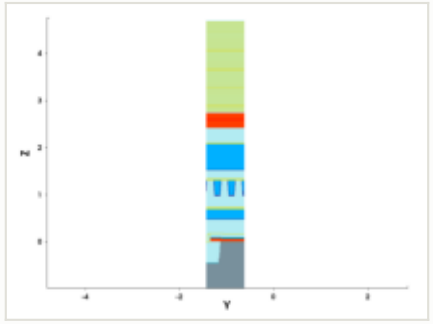

y cut at -1.035 µm

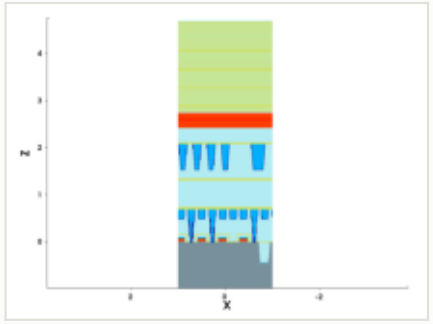

mask for this step

no mask for this step

steps by process area

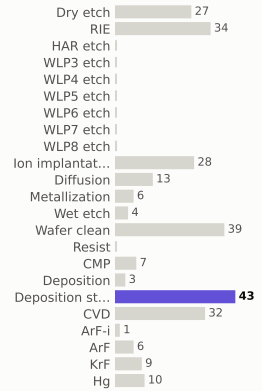

materials deposited (g)

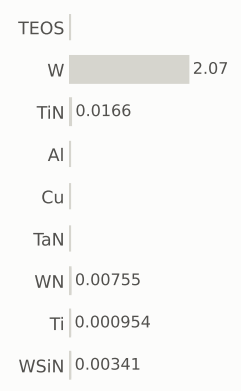

gases emitted (g)

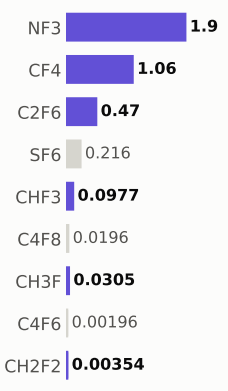

Step #3170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	237.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

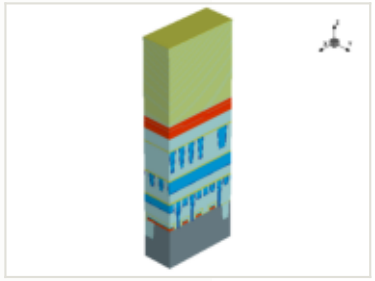

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

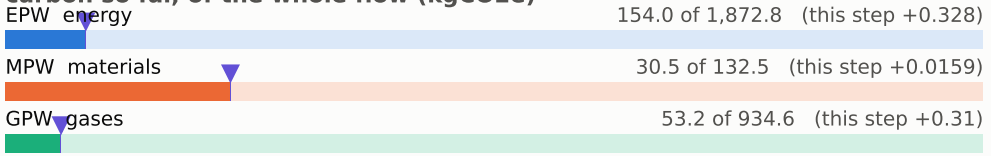

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

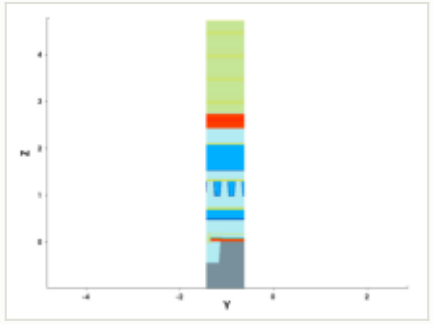

y cut at -1.035 µm

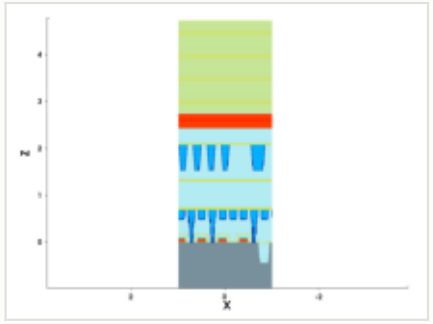

mask for this step

no mask for this step

steps by process area

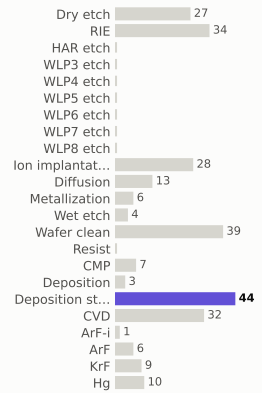

materials deposited (g)

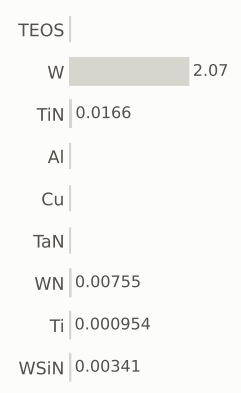

gases emitted (g)

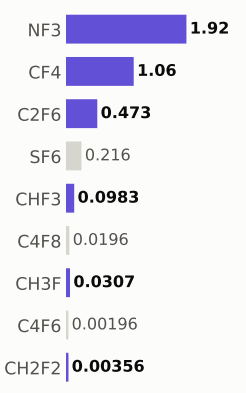

Step #3180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	238.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

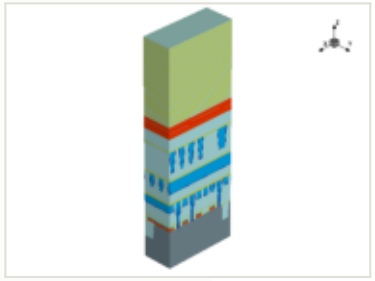

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

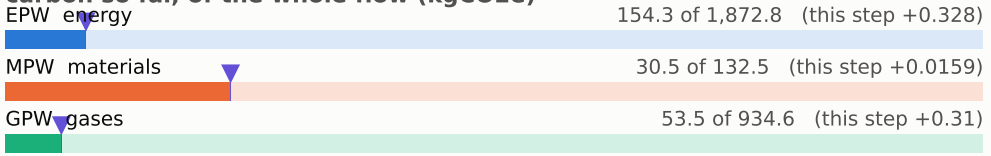

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

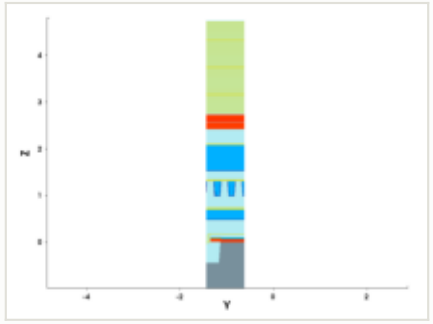

y cut at -1.035 µm

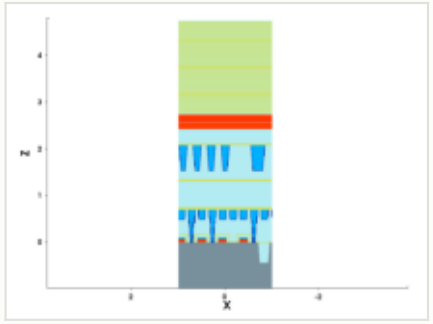

mask for this step

no mask for this step

steps by process area

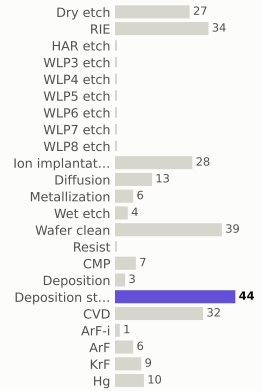

materials deposited (g)

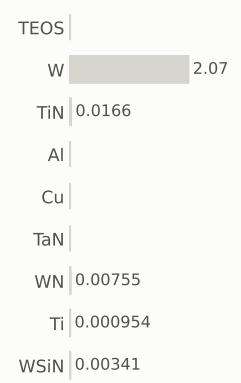

gases emitted (g)

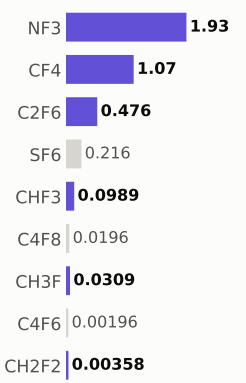

Step #3190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	239.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

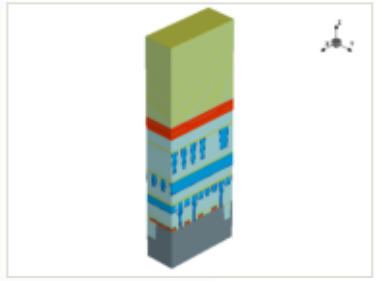

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

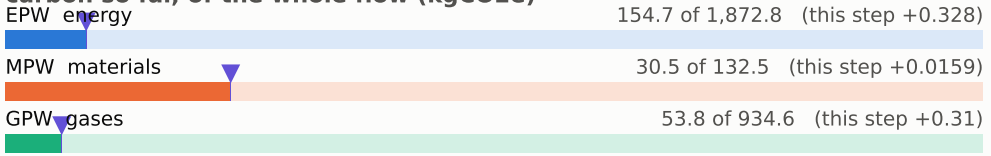

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

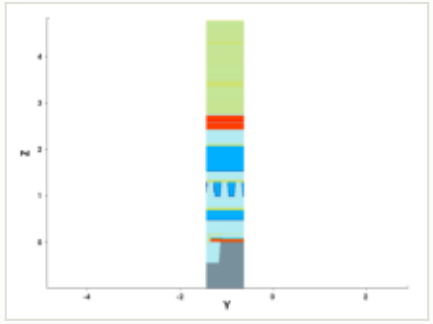

y cut at -1.035 µm

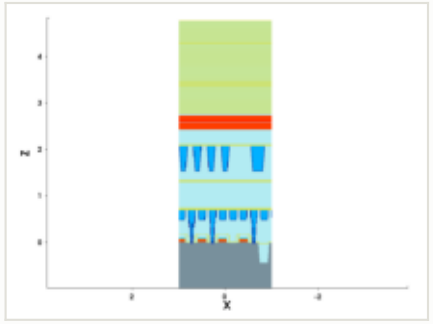

mask for this step

no mask for this step

steps by process area

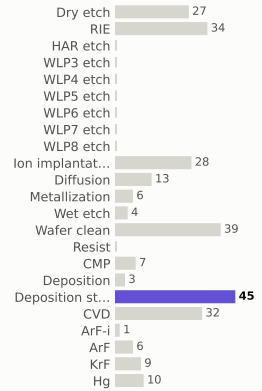

materials deposited (g)

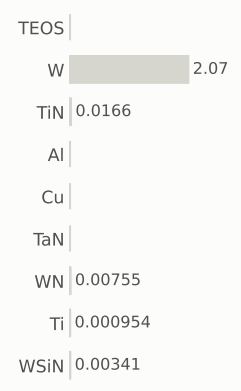

gases emitted (g)

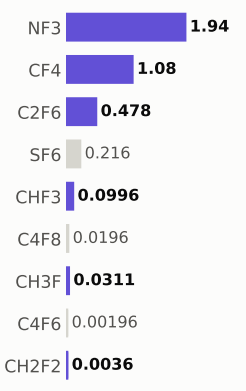

Step #3200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	239.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

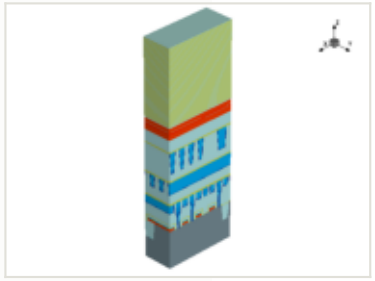

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

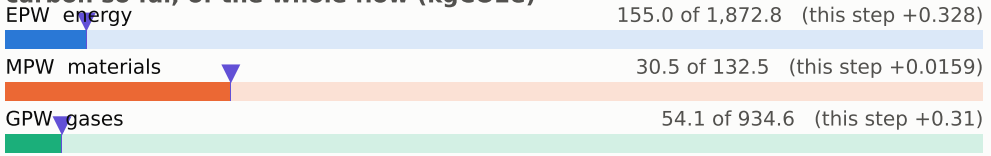

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

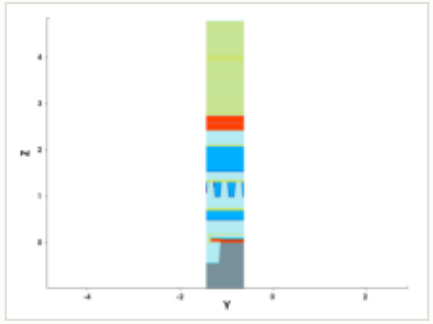

y cut at -1.035 µm

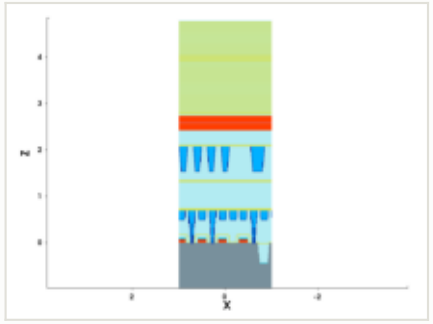

mask for this step

no mask for this step

steps by process area

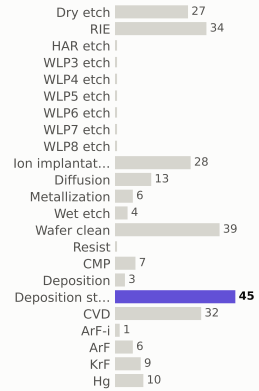

materials deposited (g)

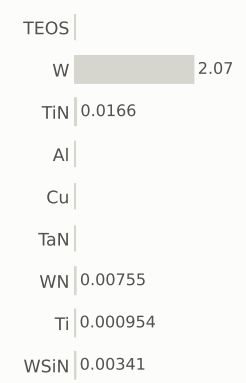

gases emitted (g)

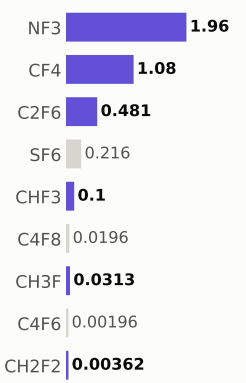

Step #3210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	240.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

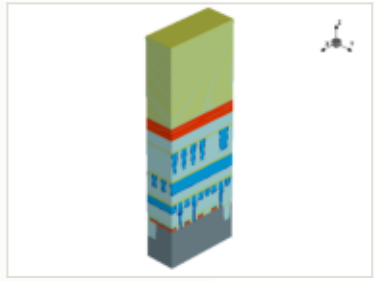

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

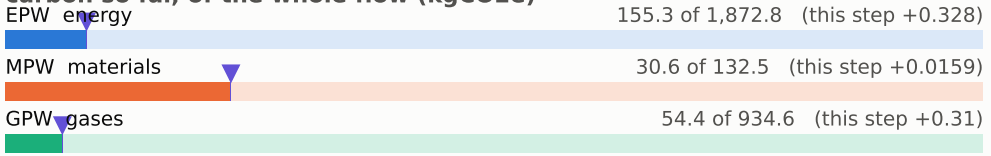

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

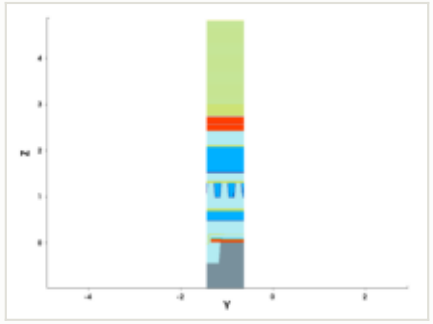

y cut at -1.035 µm

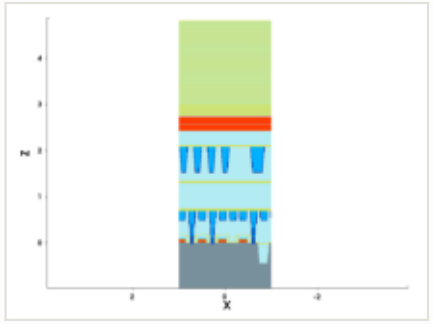

mask for this step

no mask for this step

steps by process area

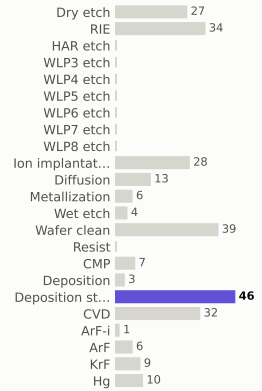

materials deposited (g)

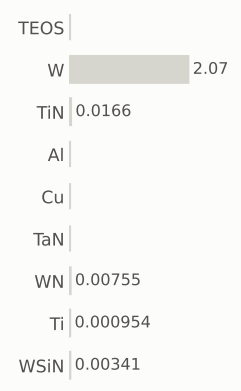

gases emitted (g)

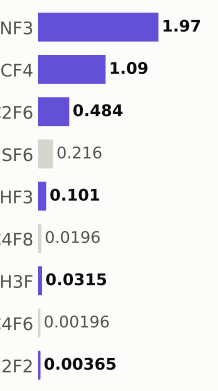

Step #3220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	241.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

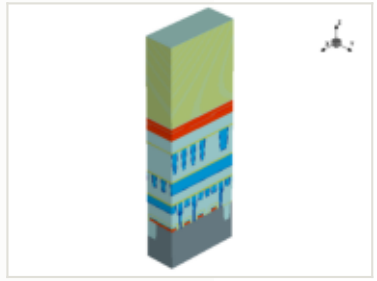

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

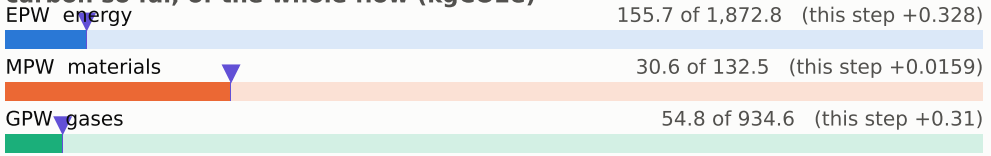

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

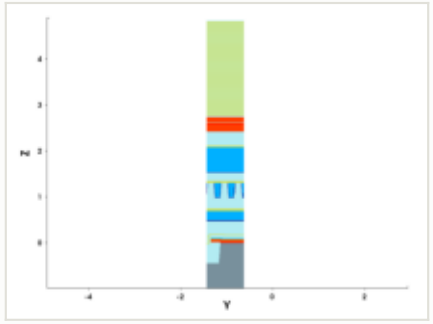

y cut at -1.035 µm

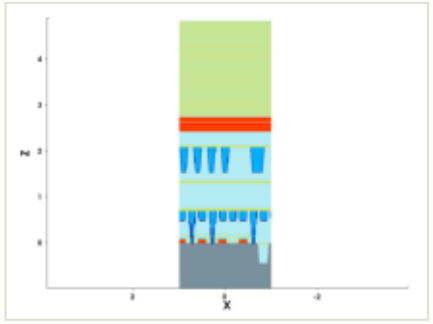

mask for this step

no mask for this step

steps by process area

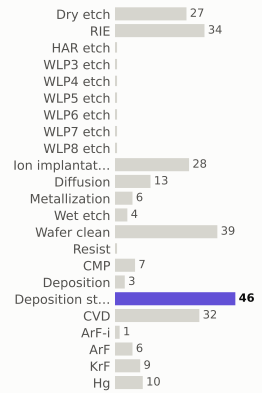

materials deposited (g)

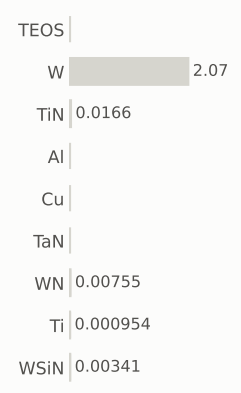

gases emitted (g)

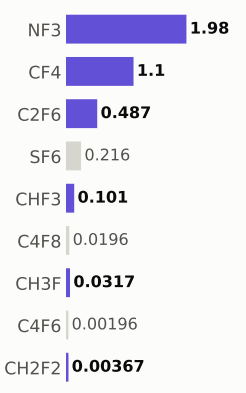

Step #3230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	241.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

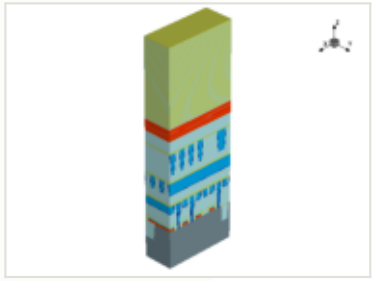

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

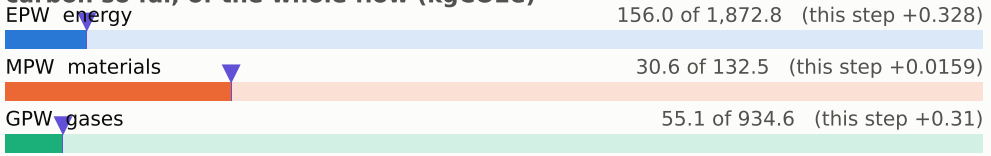

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

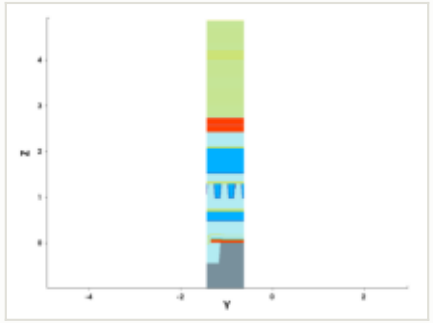

y cut at -1.035 µm

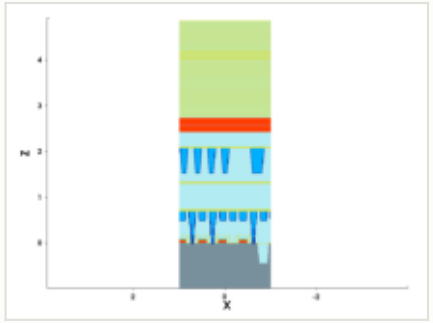

mask for this step

no mask for this step

steps by process area

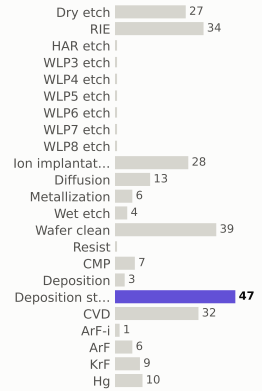

materials deposited (g)

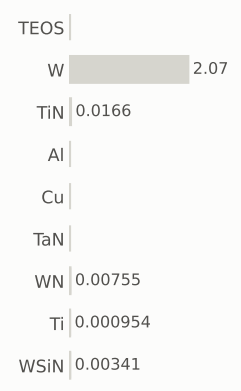

gases emitted (g)

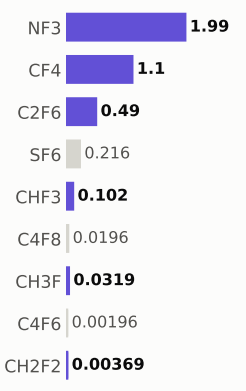

Step #3240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	242.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

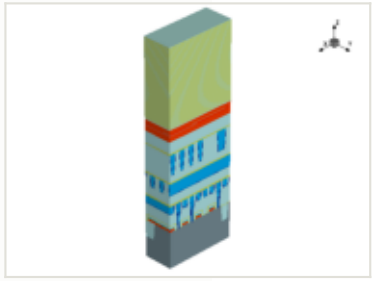

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

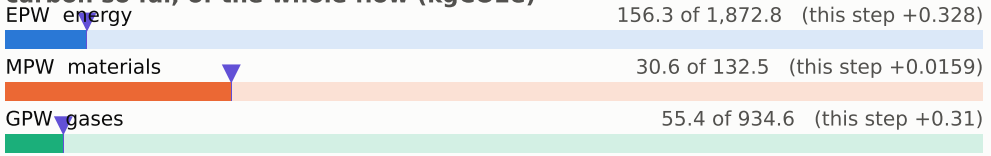

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

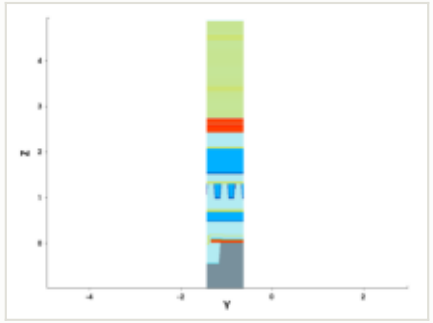

y cut at -1.035 µm

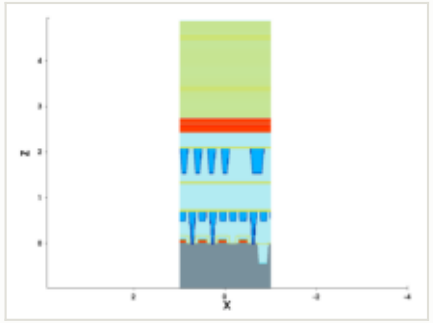

mask for this step

no mask for this step

steps by process area

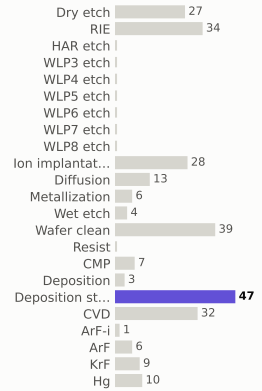

materials deposited (g)

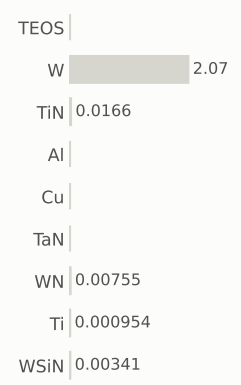

gases emitted (g)

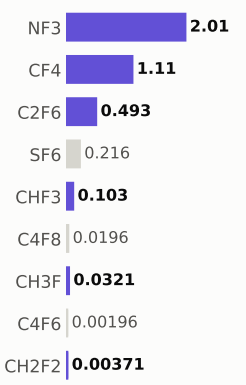

Step #3250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	242.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

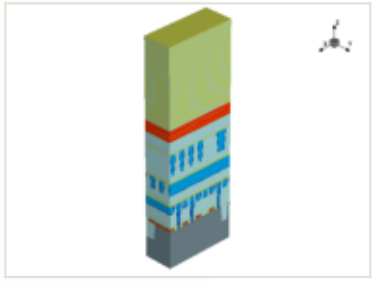

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

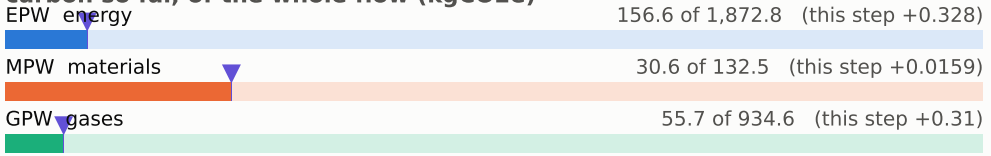

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

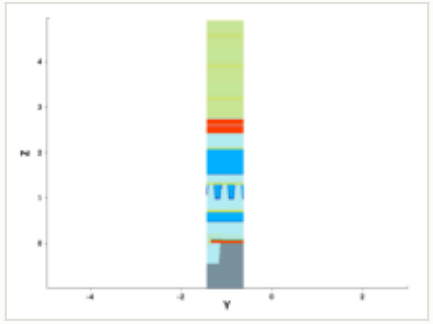

y cut at -1.035 µm

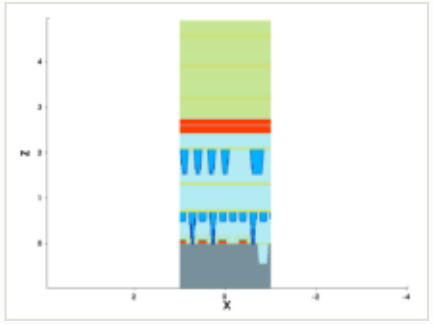

mask for this step

no mask for this step

steps by process area

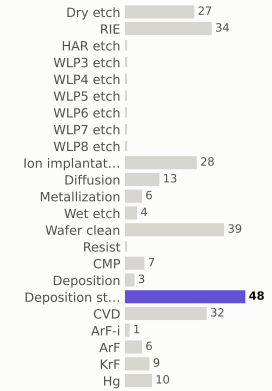

materials deposited (g)

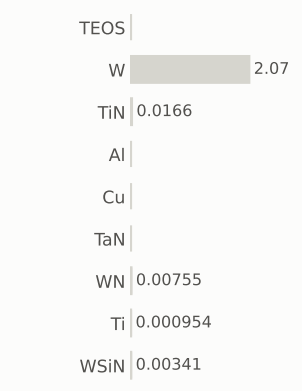

gases emitted (g)

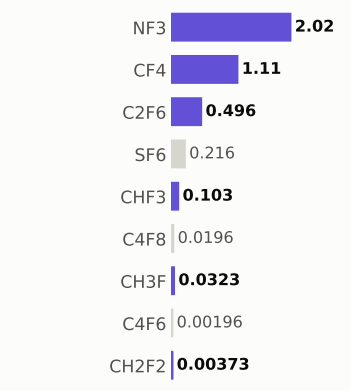

Step #3260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	243.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

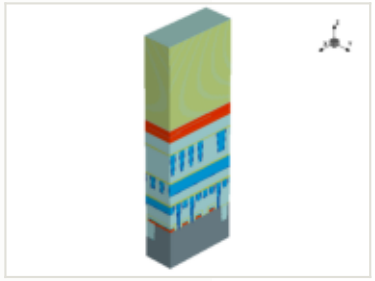

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

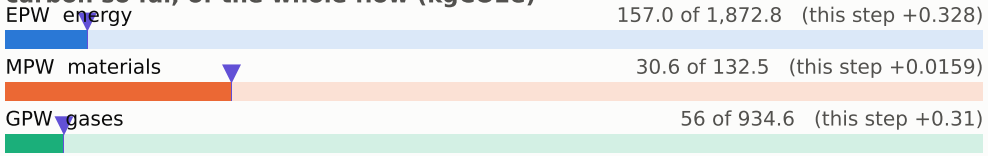

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

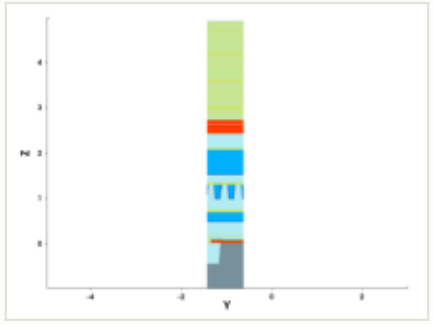

y cut at -1.035 µm

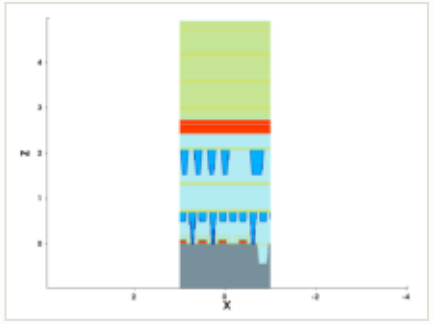

mask for this step

no mask for this step

steps by process area

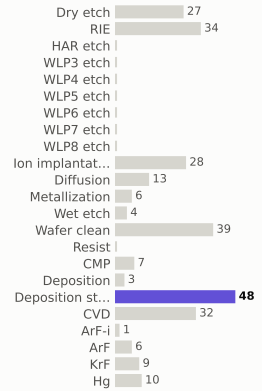

materials deposited (g)

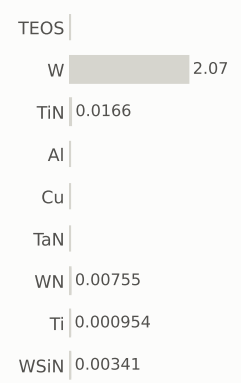

gases emitted (g)

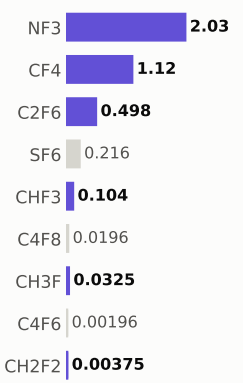

Step #3270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	244.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

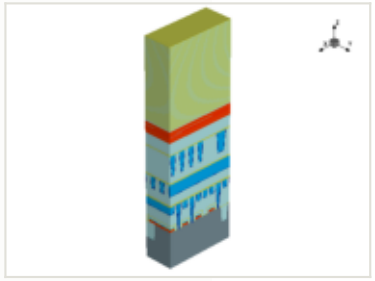

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

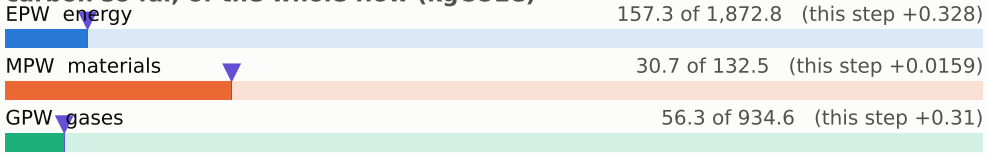

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

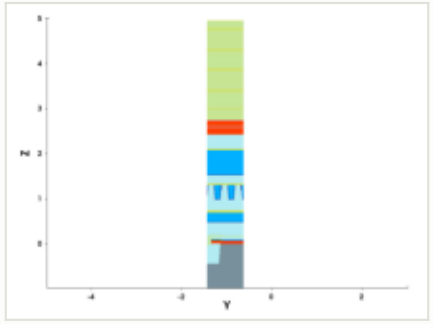

y cut at -1.035 µm

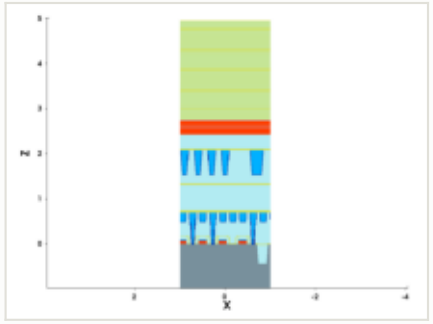

mask for this step

no mask for this step

steps by process area

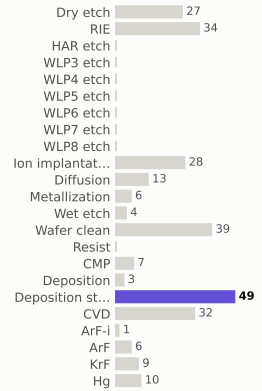

materials deposited (g)

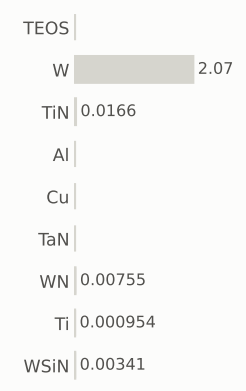

gases emitted (g)

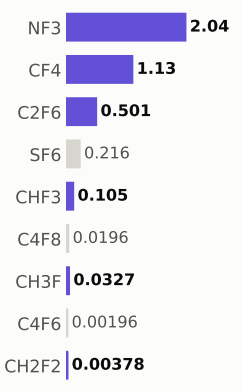

Step #3280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	244.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

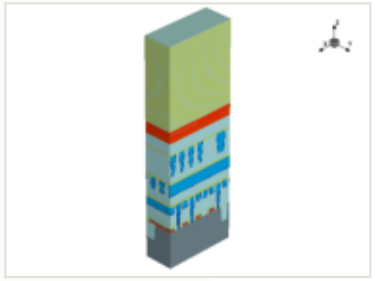

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

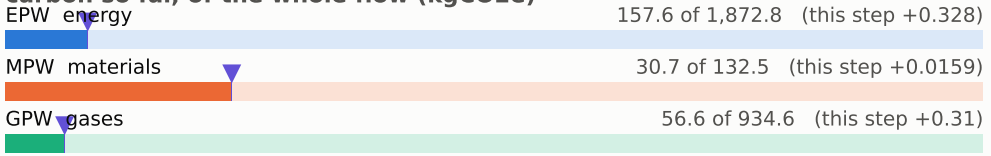

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

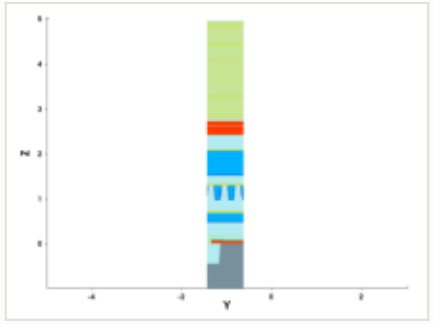

y cut at -1.035 µm

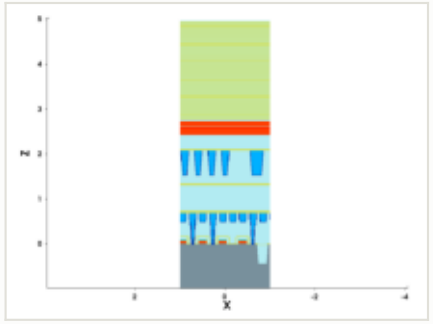

mask for this step

no mask for this step

steps by process area

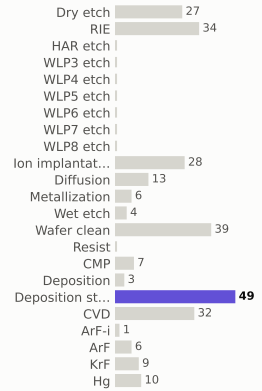

materials deposited (g)

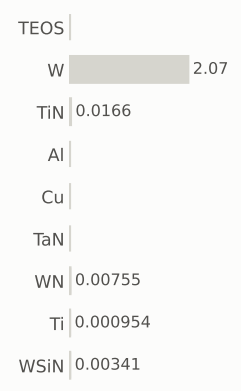

gases emitted (g)

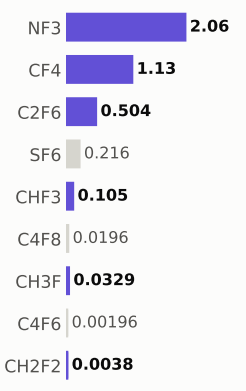

Step #3290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	245.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

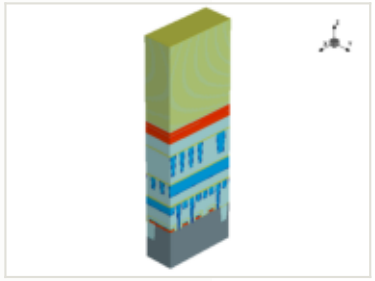

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

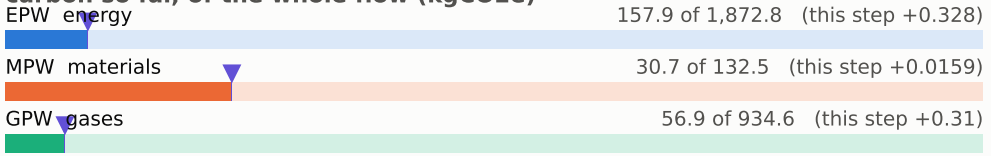

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

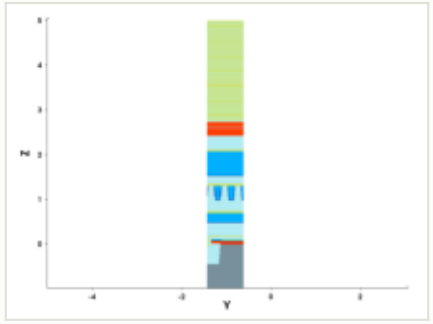

y cut at -1.035 µm

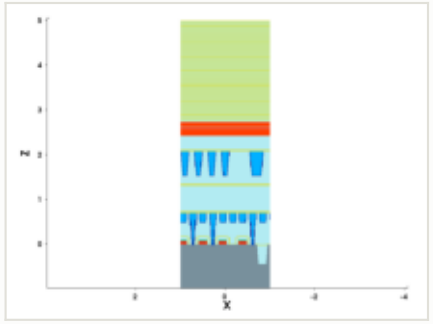

mask for this step

no mask for this step

steps by process area

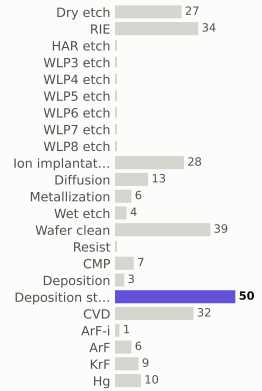

materials deposited (g)

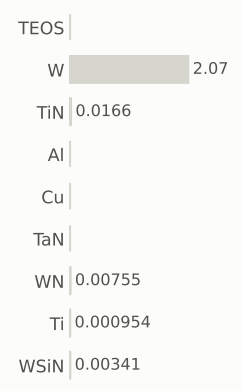

gases emitted (g)

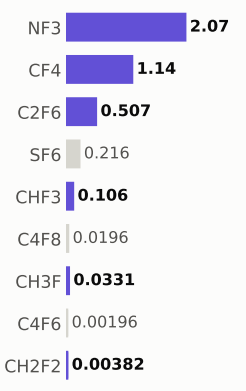

Step #3300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	246.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

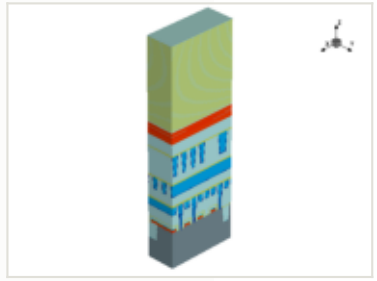

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

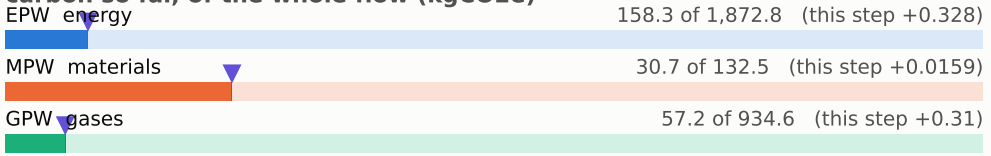

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

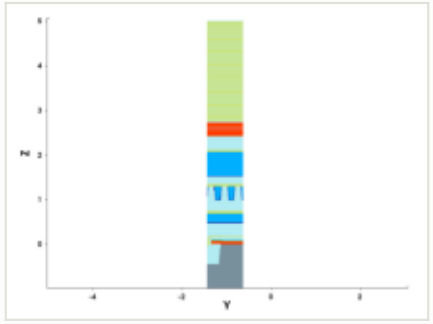

y cut at -1.035 µm

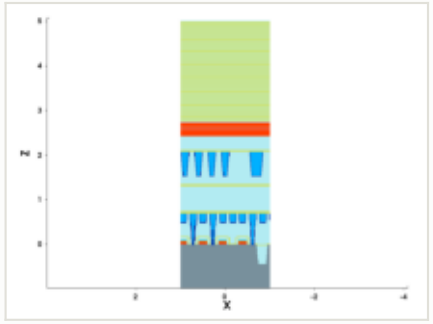

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #3310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	246.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

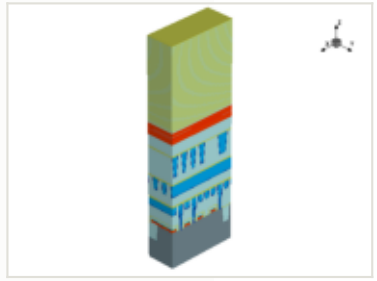

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

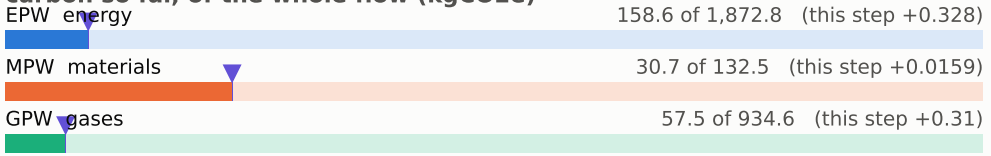

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

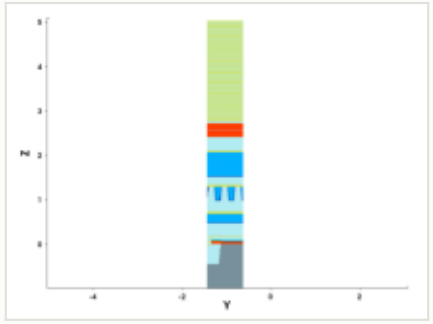

y cut at -1.035 µm

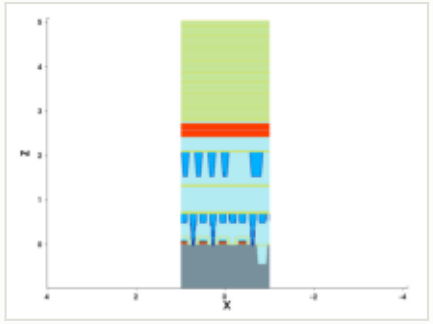

mask for this step

no mask for this step

steps by process area

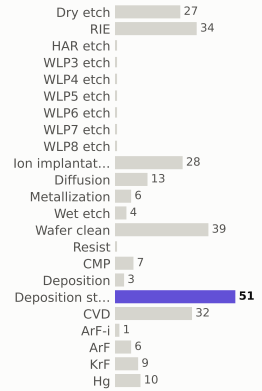

materials deposited (g)

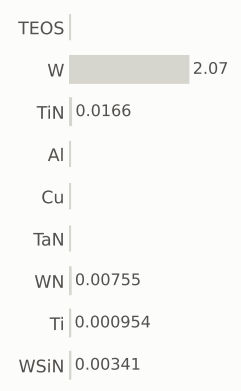

gases emitted (g)

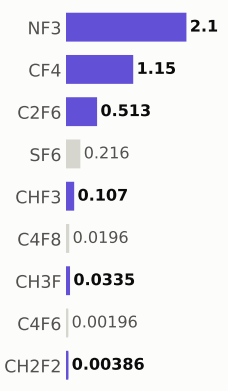

Step #3320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	247.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

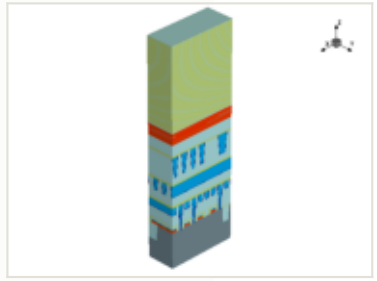

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

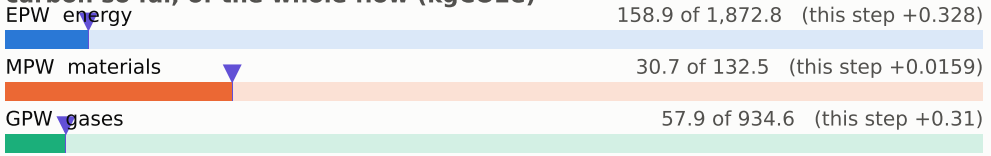

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

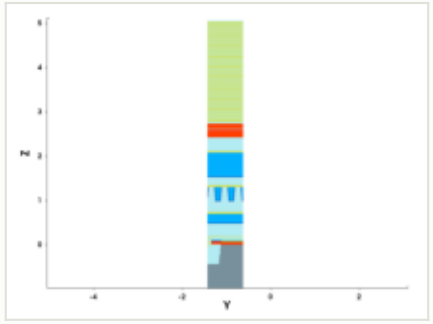

y cut at -1.035 µm

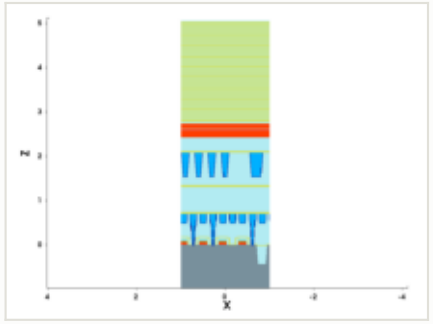

mask for this step

no mask for this step

steps by process area

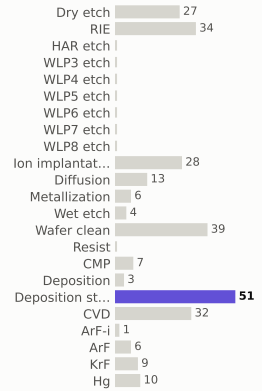

materials deposited (g)

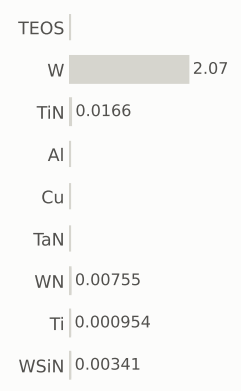

gases emitted (g)

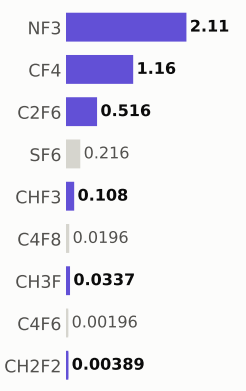

Step #3330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	248.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

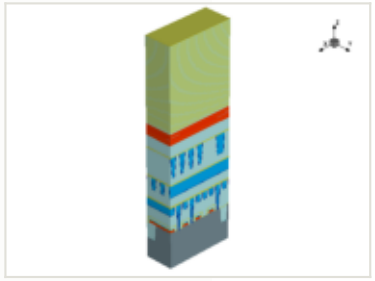

x cut at 0.000 µm

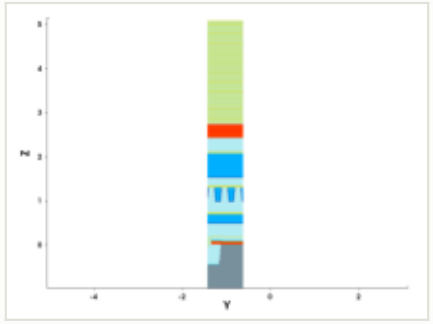

y cut at -1.035 µm

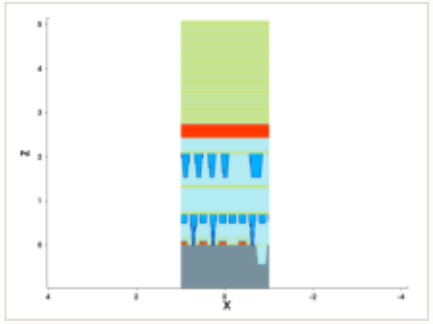

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

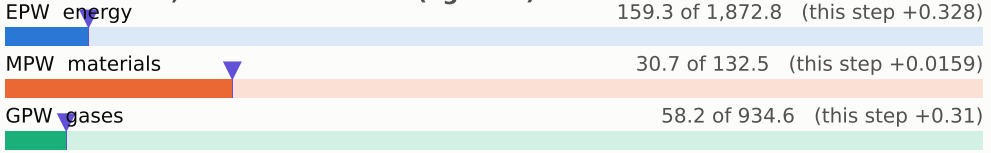

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

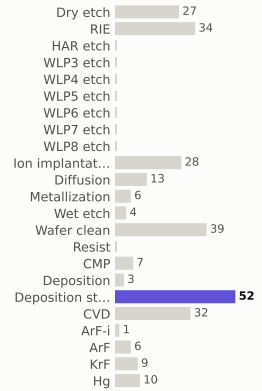

materials deposited (g)

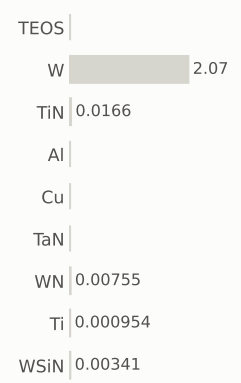

gases emitted (g)

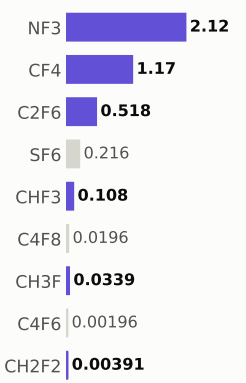

Step #3340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	248.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

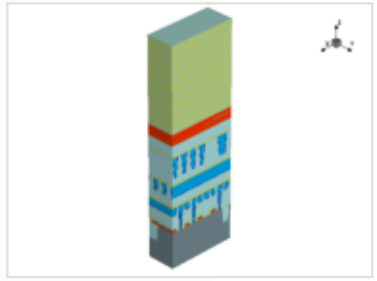

x cut at 0.000 µm

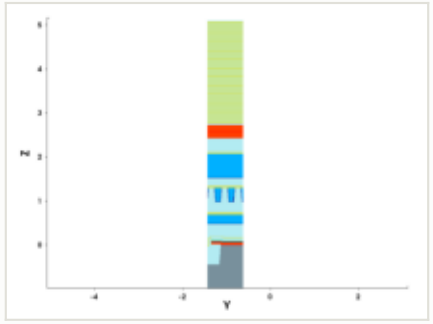

y cut at -1.035 µm

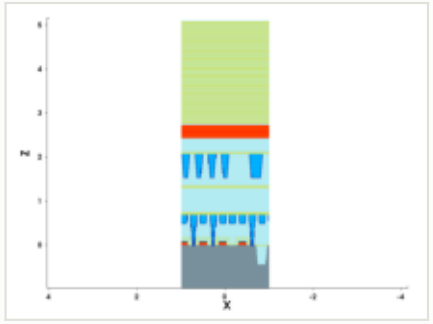

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

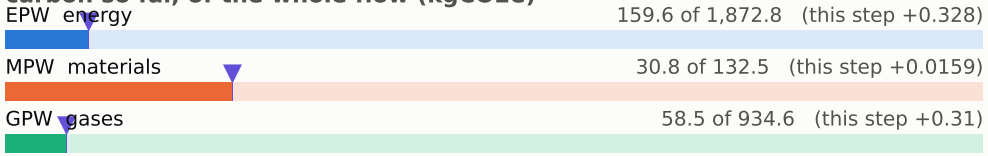

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

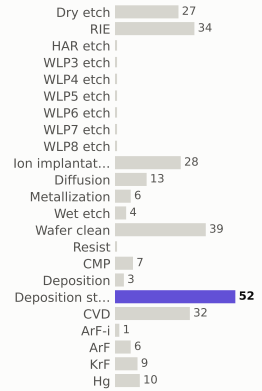

materials deposited (g)

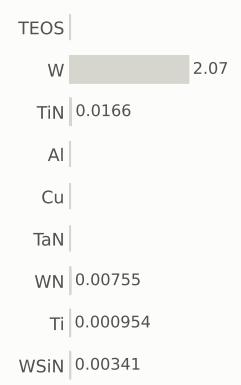

gases emitted (g)

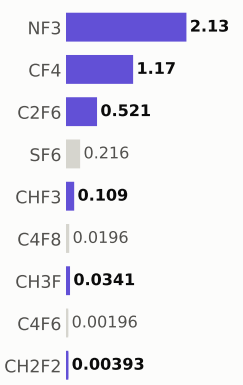

Step #3350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	249.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

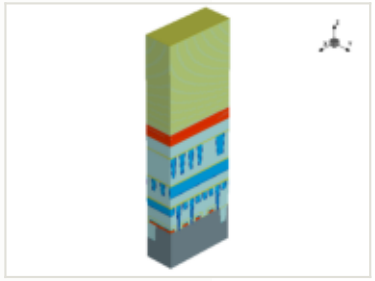

x cut at 0.000 µm

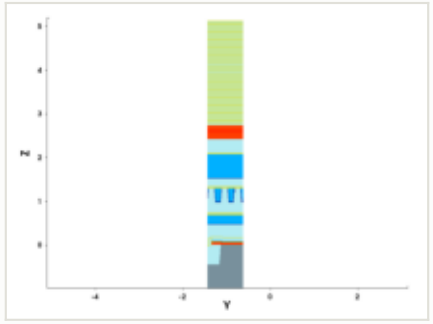

y cut at -1.035 µm

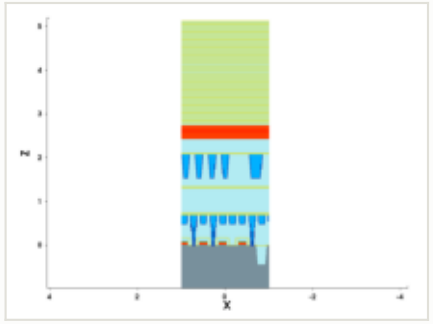

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

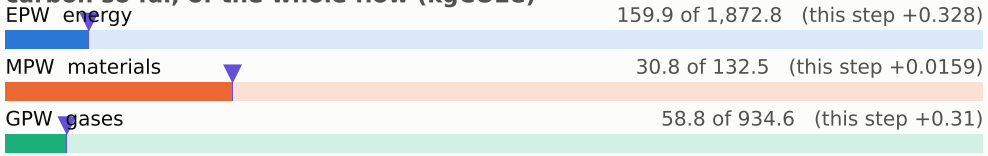

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

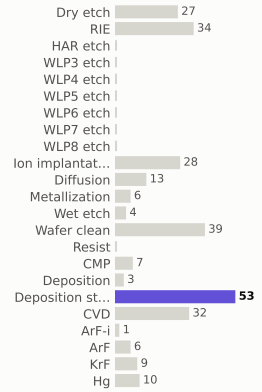

materials deposited (g)

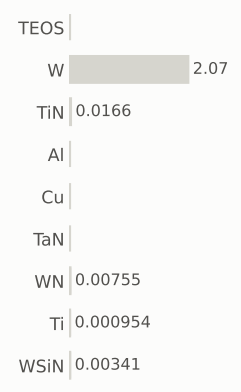

gases emitted (g)

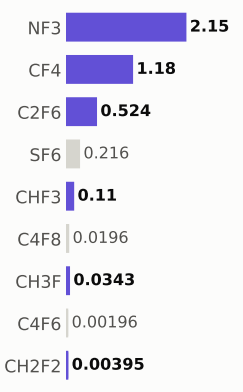

Step #3360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	250.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

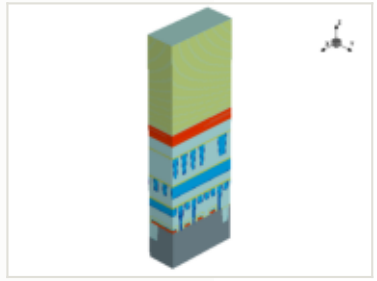

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

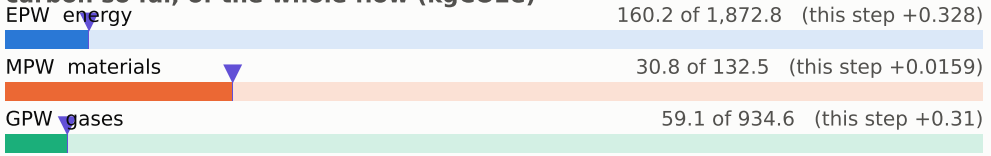

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

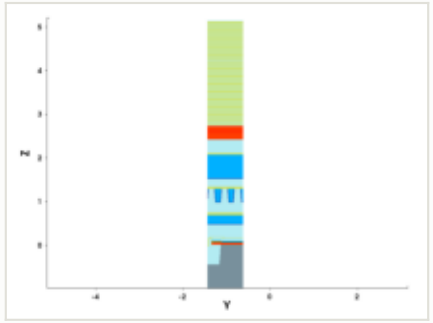

y cut at -1.035 µm

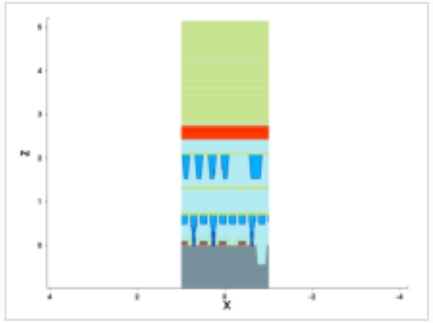

mask for this step

no mask for this step

steps by process area

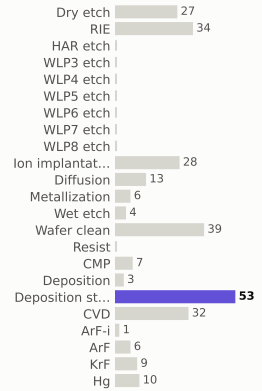

materials deposited (g)

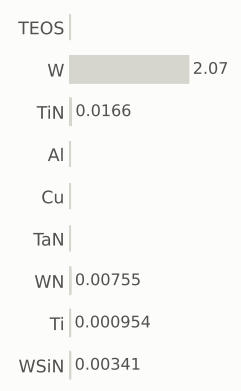

gases emitted (g)

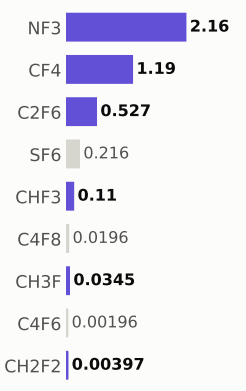

Step #3370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	250.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

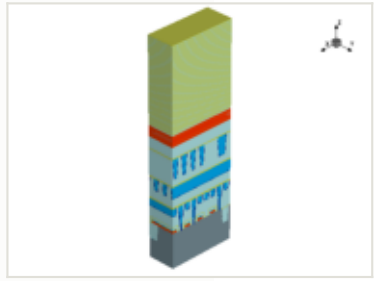

x cut at 0.000 µm

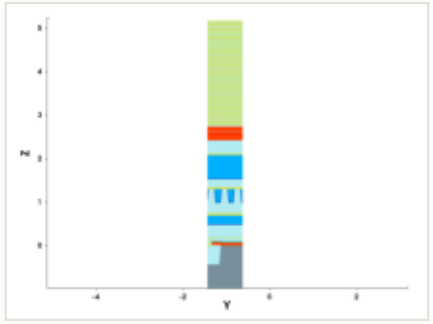

y cut at -1.035 µm

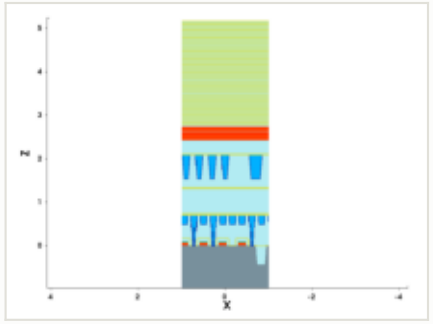

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

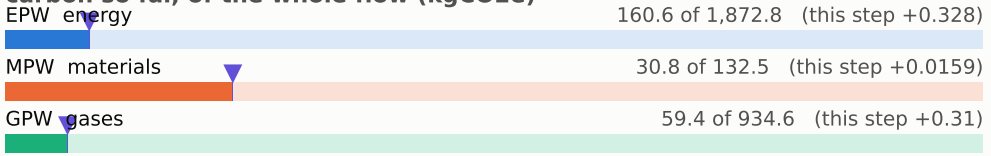

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

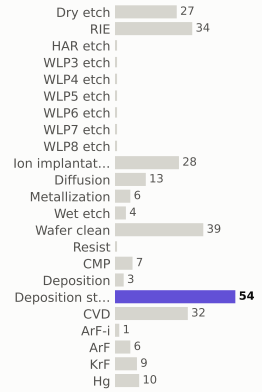

materials deposited (g)

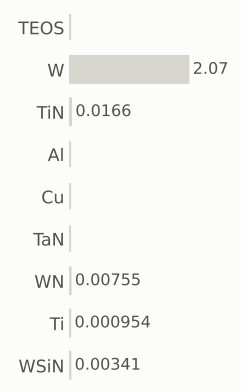

gases emitted (g)

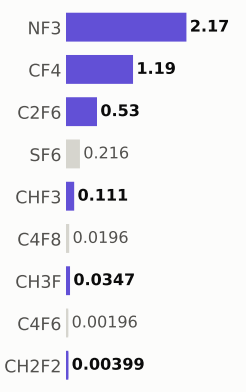

Step #3380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	251.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

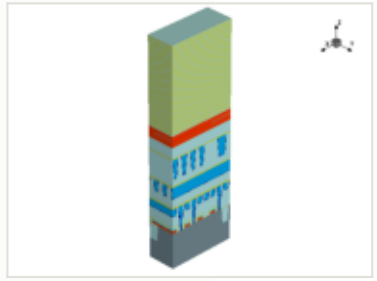

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

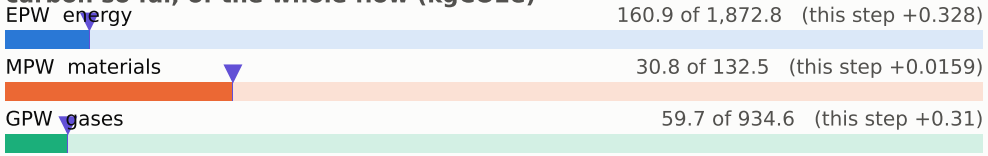

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

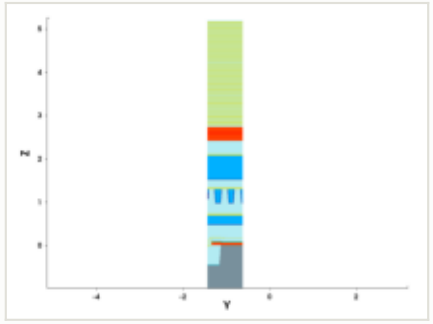

y cut at -1.035 µm

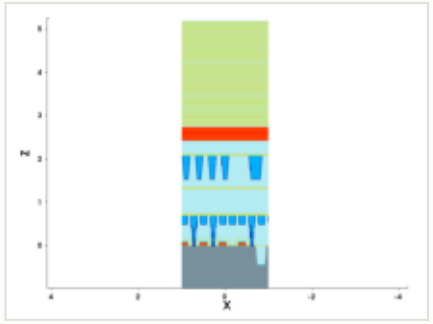

mask for this step

no mask for this step

steps by process area

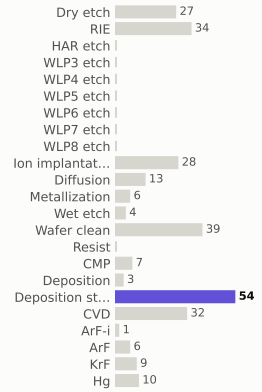

materials deposited (g)

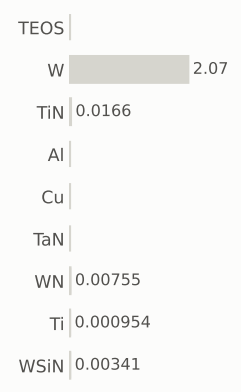

gases emitted (g)

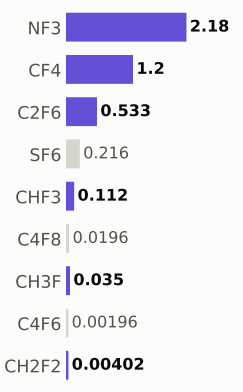

Step #3390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	252.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

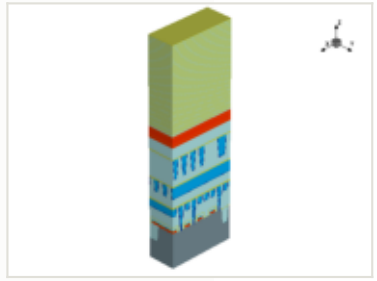

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

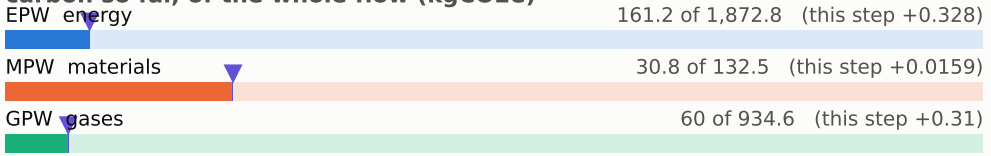

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

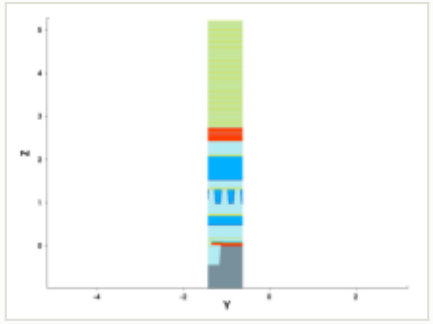

y cut at -1.035 µm

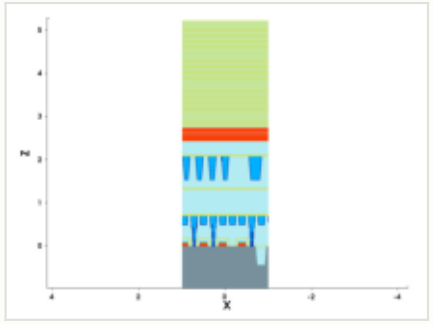

mask for this step

no mask for this step

steps by process area

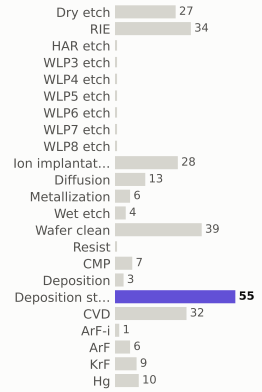

materials deposited (g)

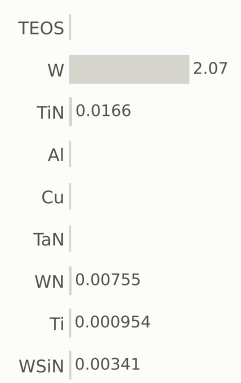

gases emitted (g)

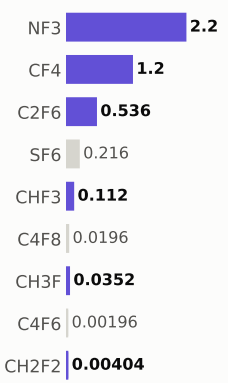

Step #3400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	252.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

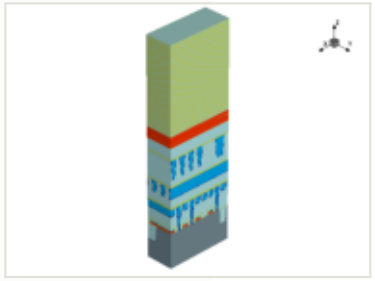

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

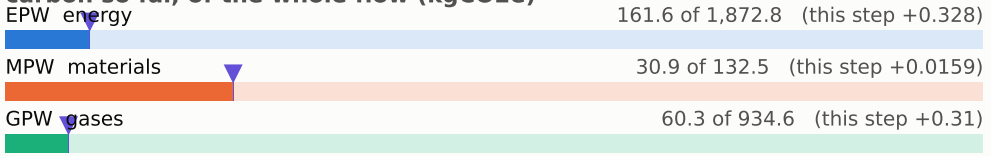

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

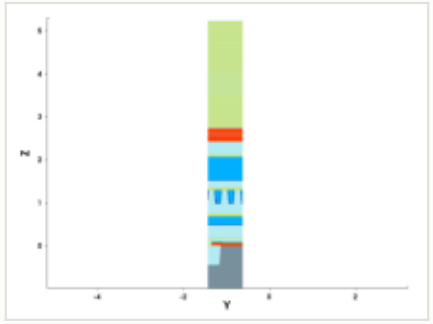

y cut at -1.035 µm

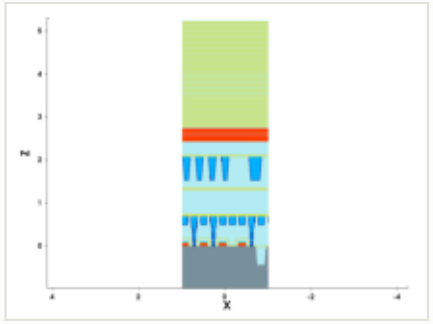

mask for this step

no mask for this step

steps by process area

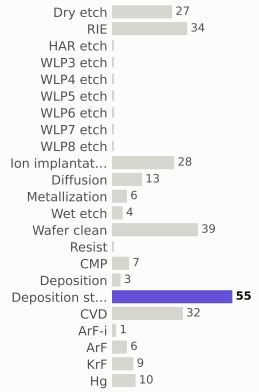

materials deposited (g)

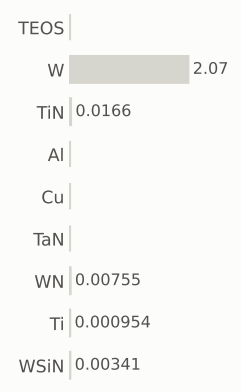

gases emitted (g)



Step #3410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	253.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

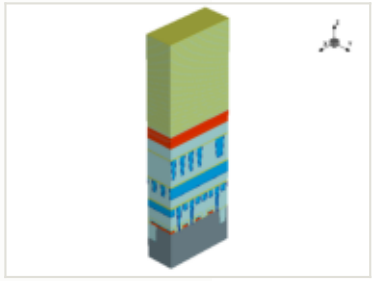

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

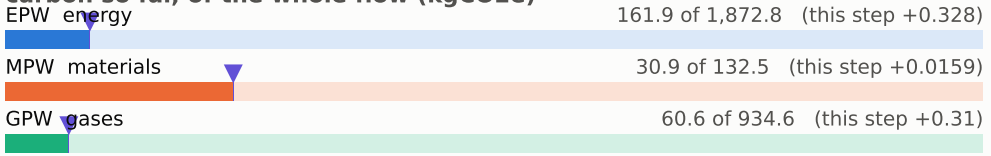

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

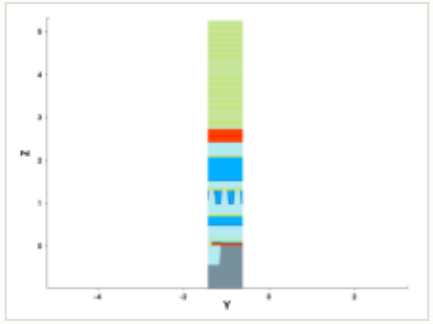

y cut at -1.035 µm

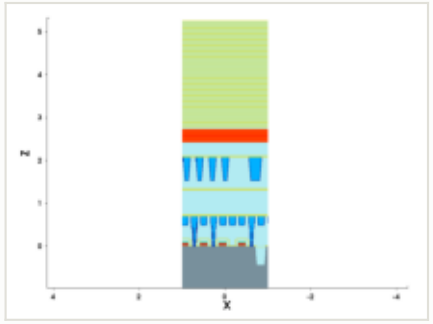

mask for this step

no mask for this step

steps by process area

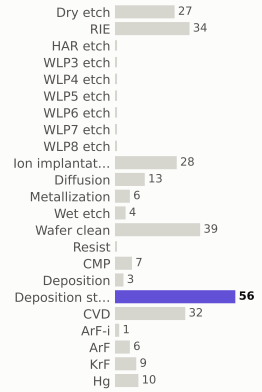

materials deposited (g)

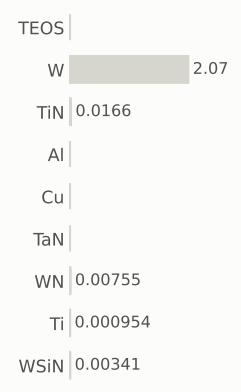

gases emitted (g)

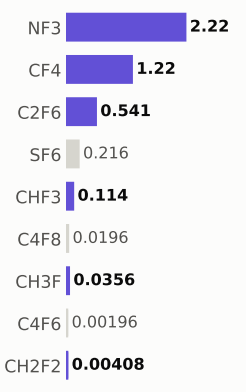

Step #3420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	254.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

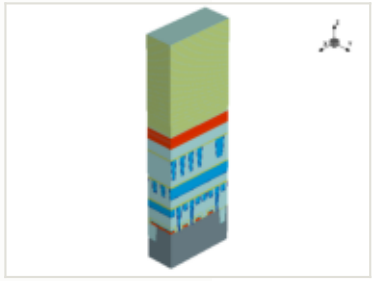

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

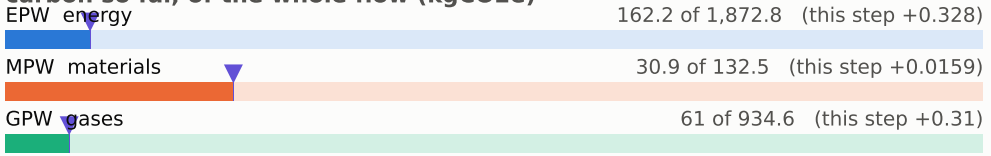

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

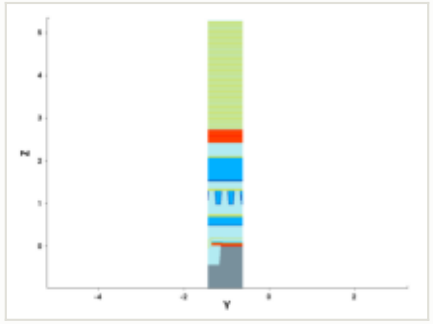

y cut at -1.035 µm

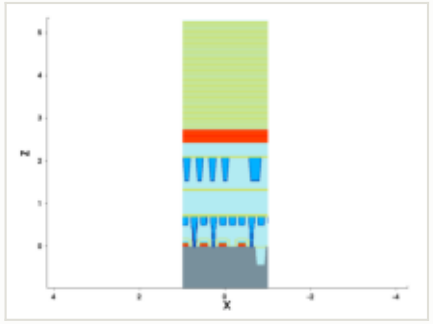

mask for this step

no mask for this step

steps by process area

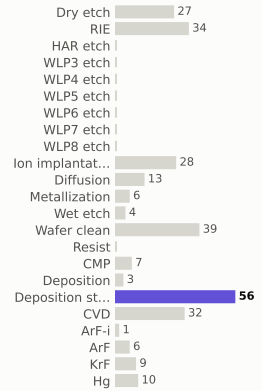

materials deposited (g)

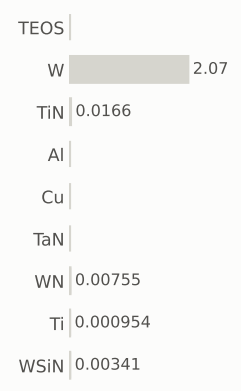

gases emitted (g)

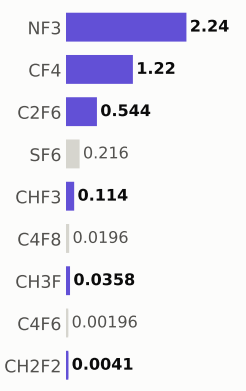

Step #3430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	254.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

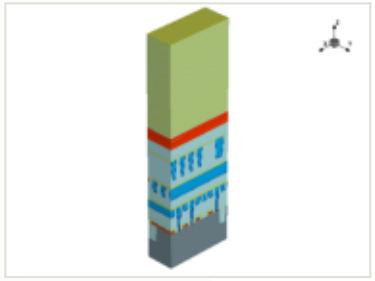

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

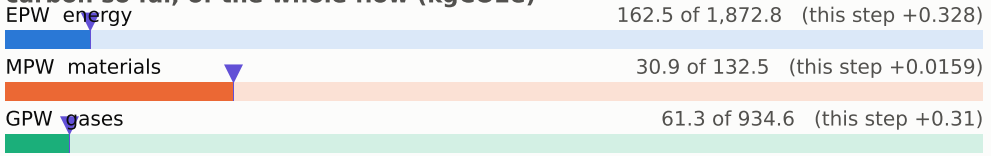

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

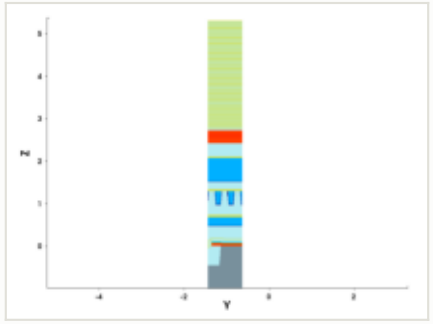

y cut at -1.035 µm

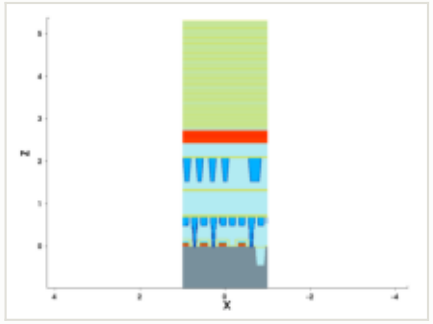

mask for this step

no mask for this step

steps by process area

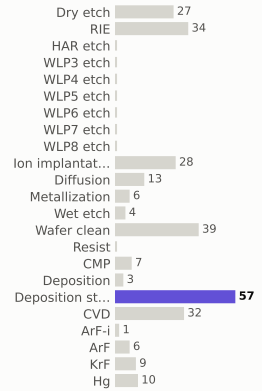

materials deposited (g)

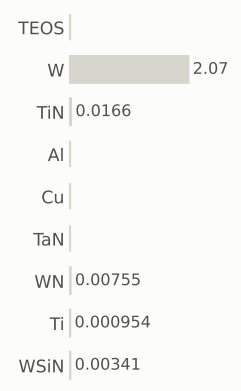

gases emitted (g)

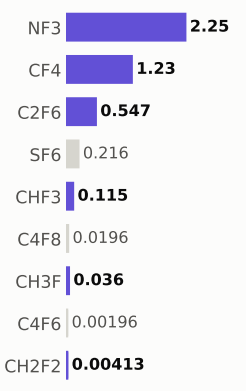

Step #3440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	255.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

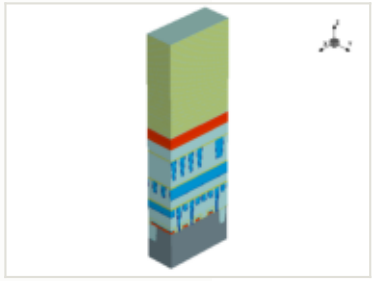

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

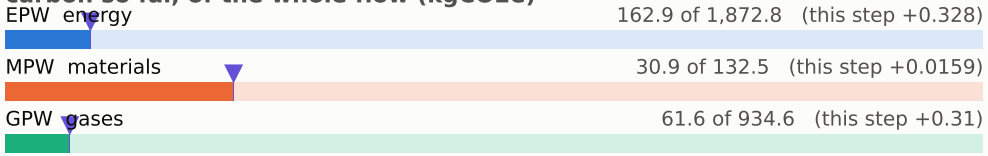

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

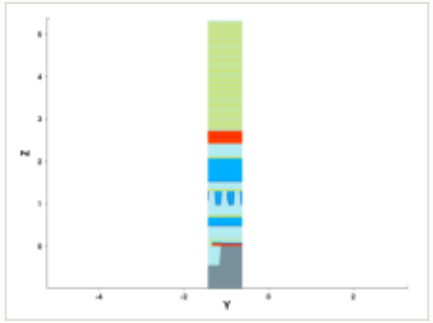

y cut at -1.035 µm

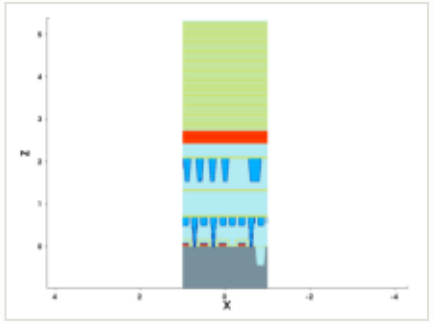

mask for this step

no mask for this step

steps by process area

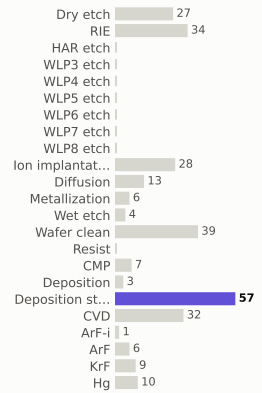

materials deposited (g)

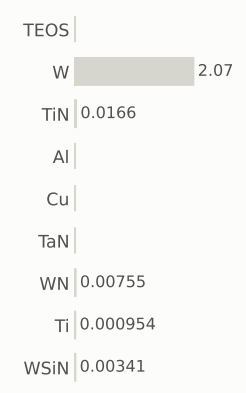

gases emitted (g)

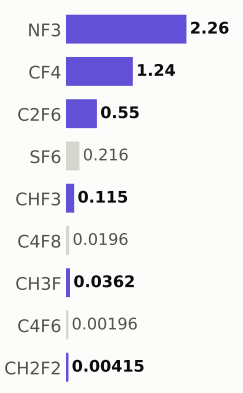

Step #3450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	256.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

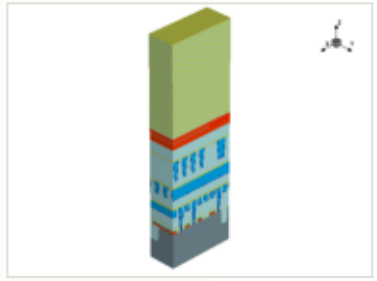

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

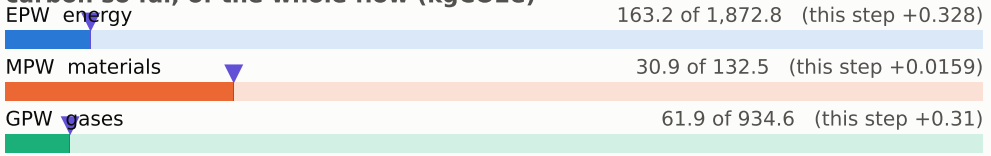

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

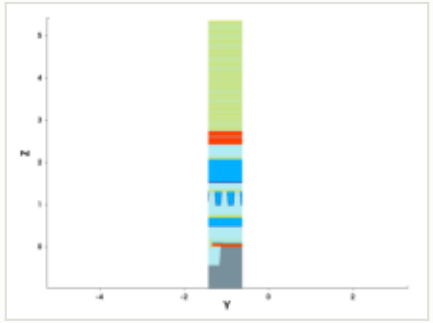

y cut at -1.035 µm

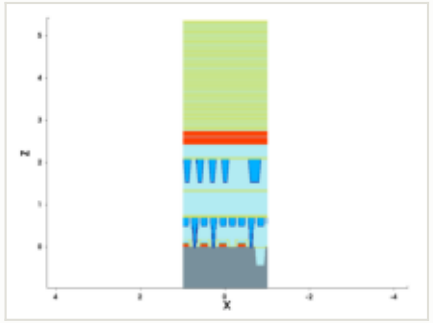

mask for this step

no mask for this step

steps by process area

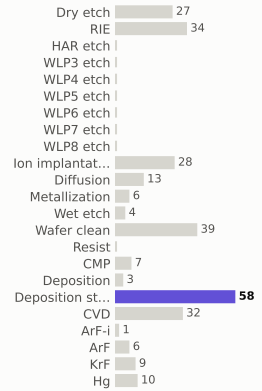

materials deposited (g)

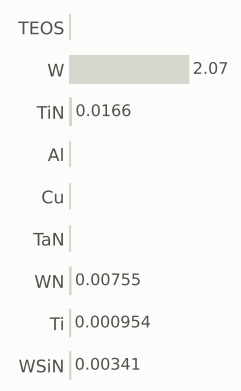

gases emitted (g)

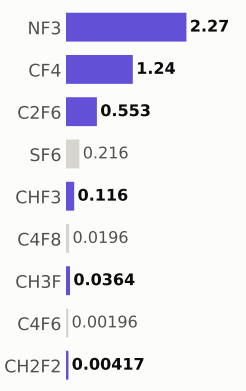

Step #3460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	256.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

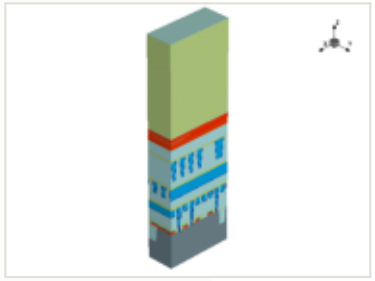

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

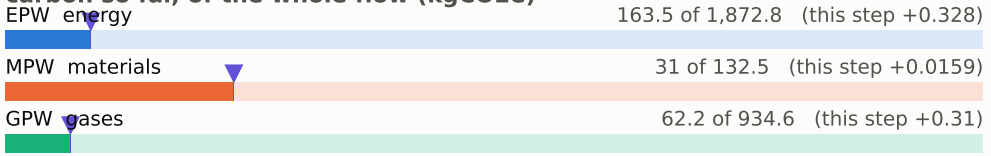

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

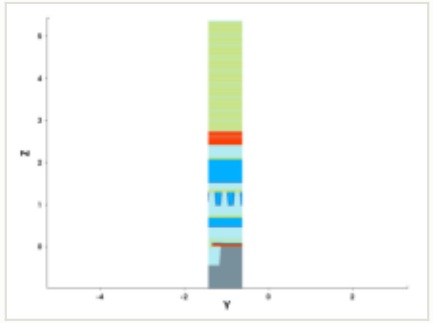

y cut at -1.035 µm

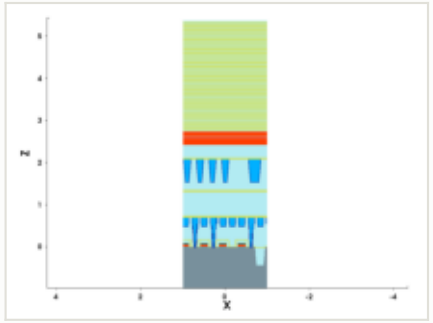

mask for this step

no mask for this step

steps by process area

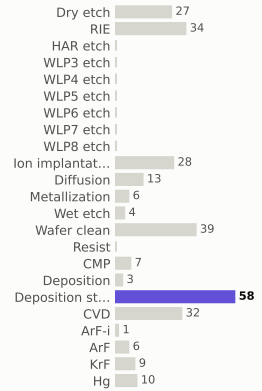

materials deposited (g)

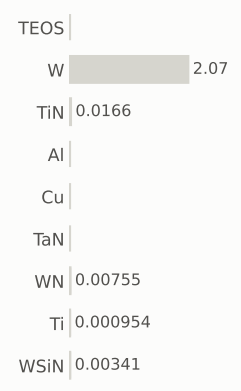

gases emitted (g)

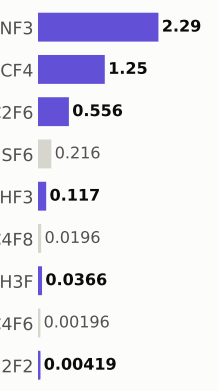

Step #3470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	257.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

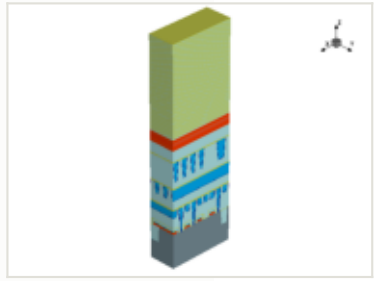

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

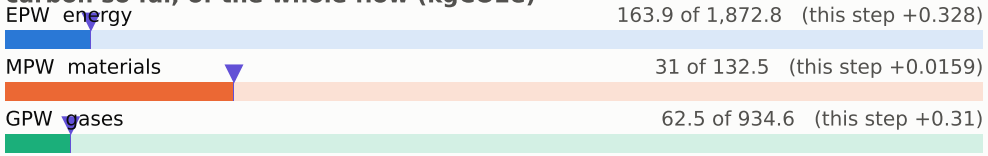

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

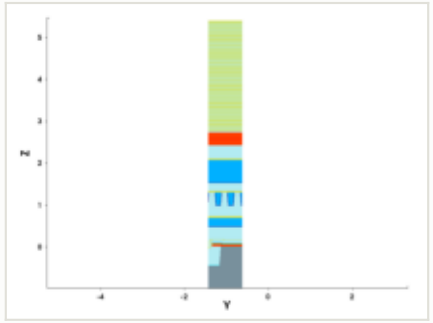

y cut at -1.035 µm

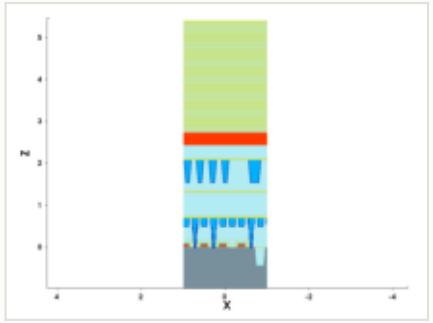

mask for this step

no mask for this step

steps by process area

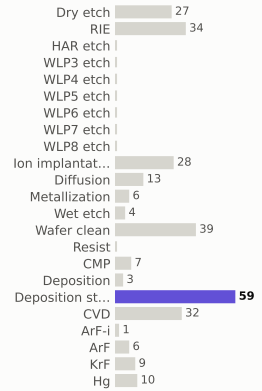

materials deposited (g)

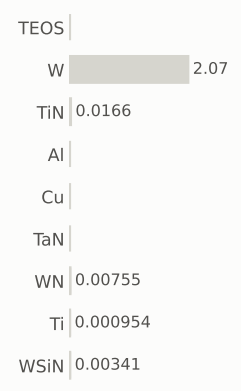

gases emitted (g)

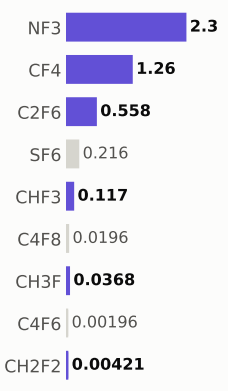

Step #3480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	258.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

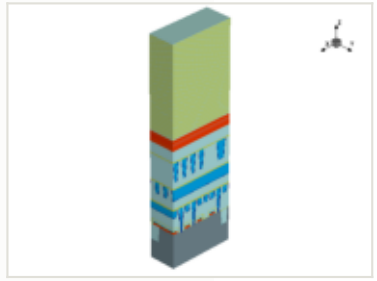

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

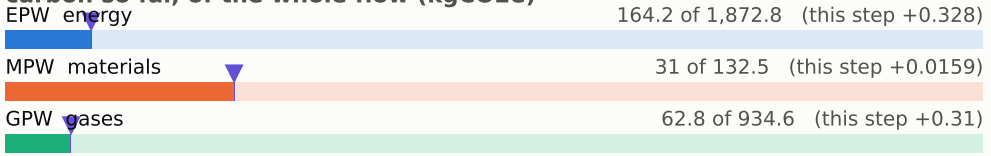

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

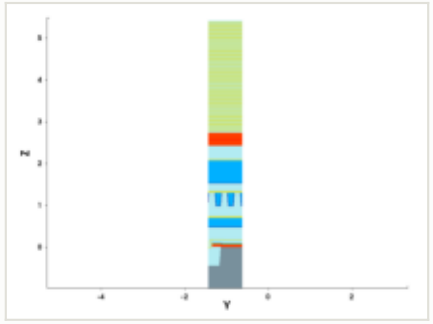

y cut at -1.035 µm

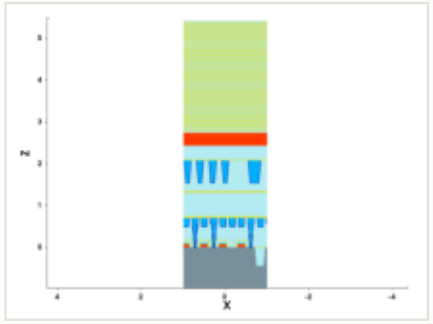

mask for this step

no mask for this step

steps by process area

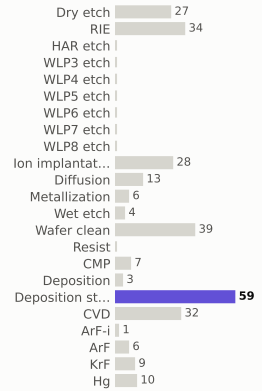

materials deposited (g)

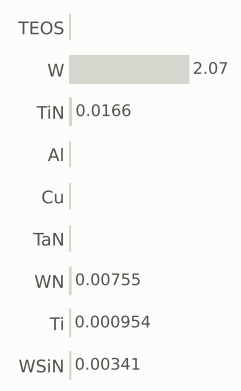

gases emitted (g)

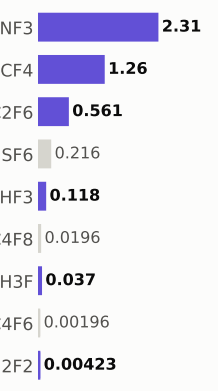

Step #3490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	258.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

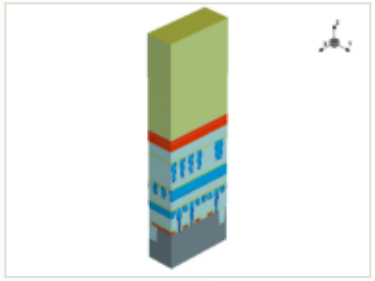

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

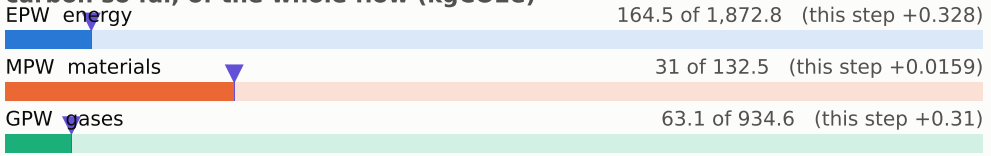

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

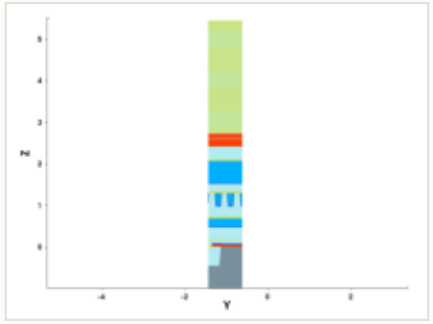

y cut at -1.035 µm

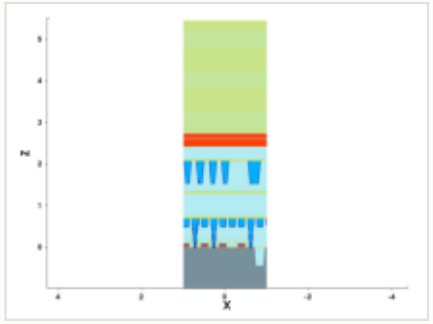

mask for this step

no mask for this step

steps by process area

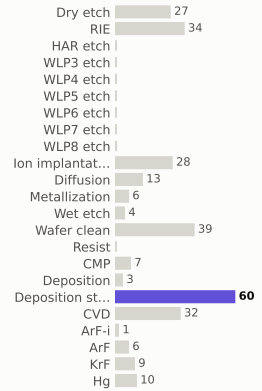

materials deposited (g)

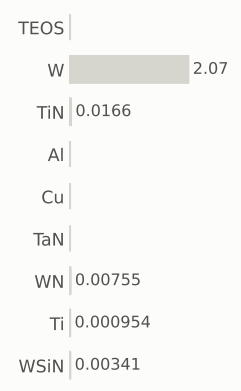

gases emitted (g)

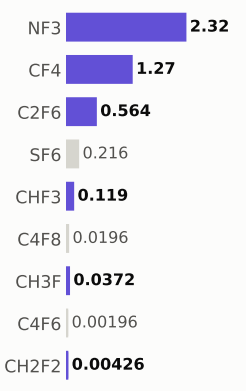

Step #3500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	259.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

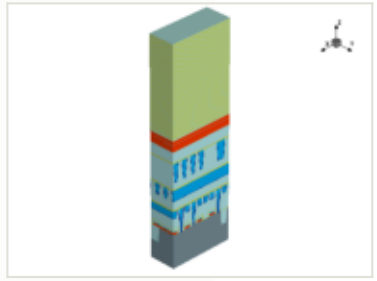

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

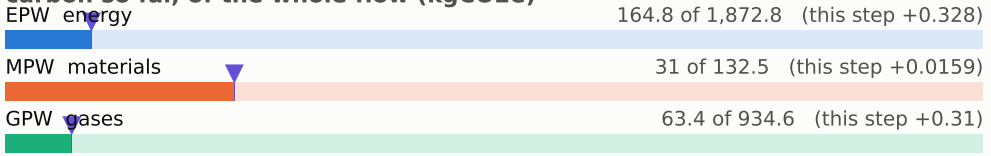

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

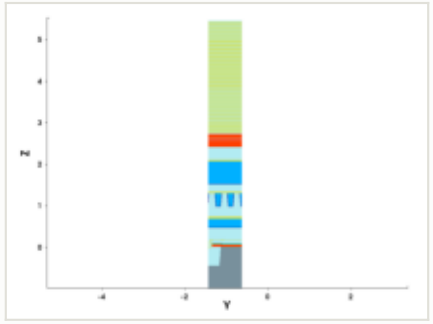

y cut at -1.035 µm

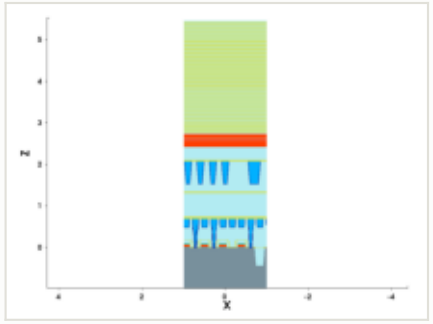

mask for this step

no mask for this step

steps by process area

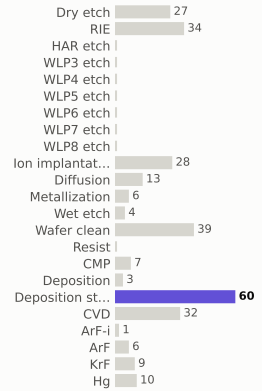

materials deposited (g)

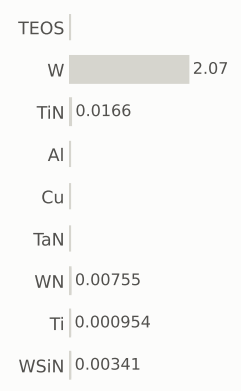

gases emitted (g)

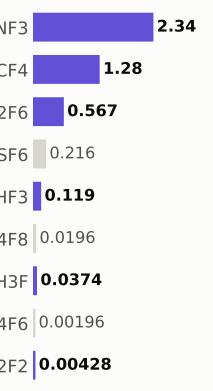

Step #3510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	260.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

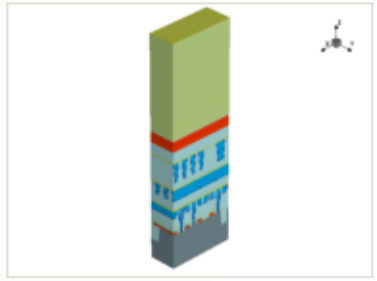

x cut at 0.000 µm

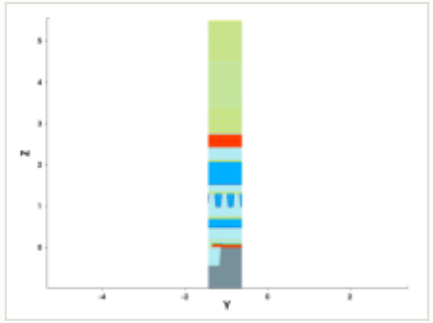

y cut at -1.035 µm

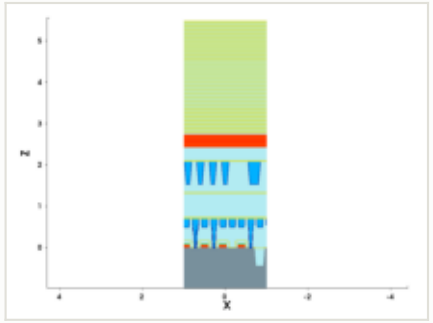

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

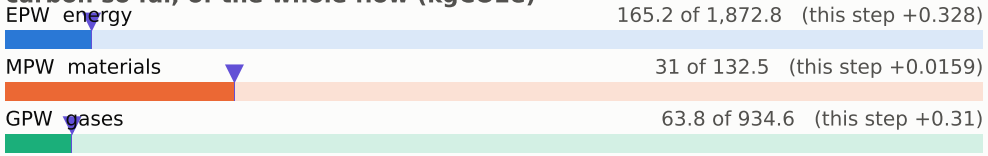

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

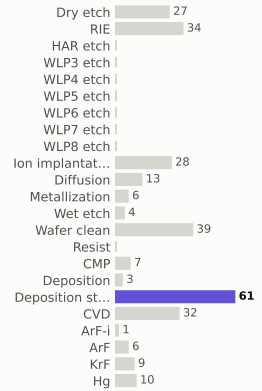

materials deposited (g)

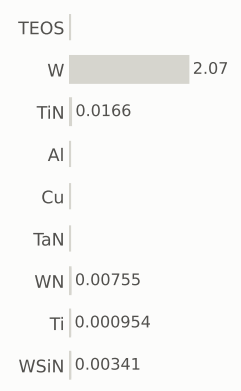

gases emitted (g)

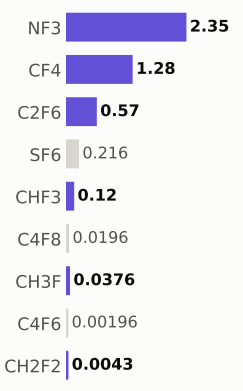

Step #3520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	260.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

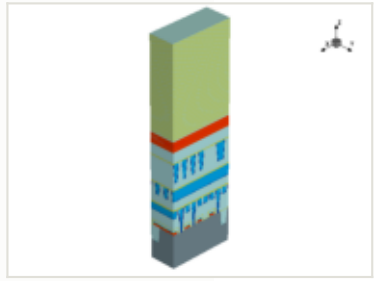

x cut at 0.000 µm

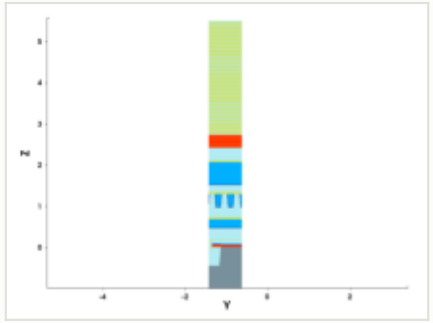

y cut at -1.035 µm

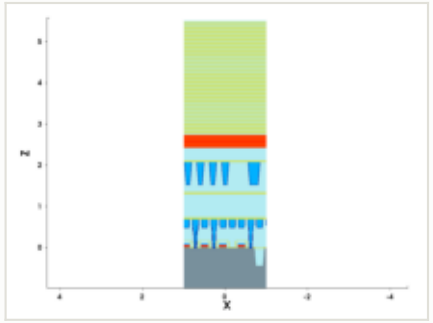

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

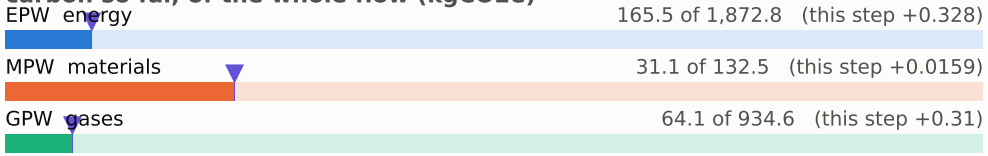

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

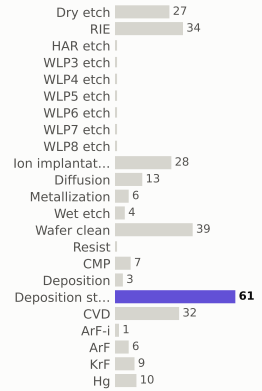

materials deposited (g)

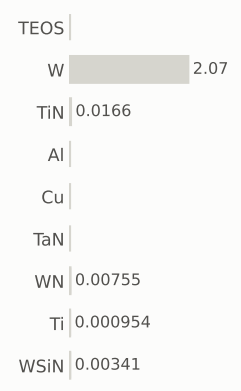

gases emitted (g)

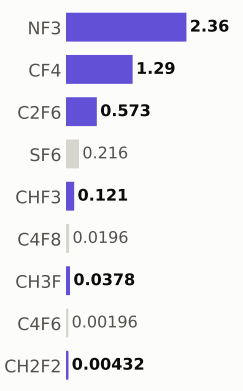

Step #3530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	261.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

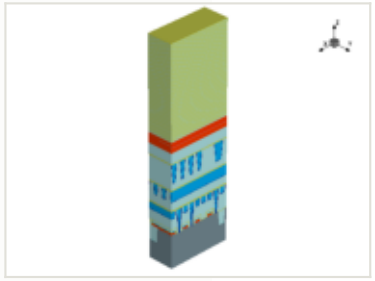

x cut at 0.000 µm

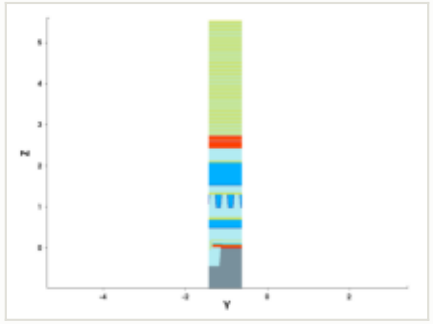

y cut at -1.035 µm

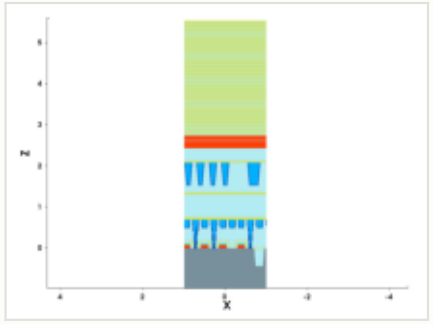

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

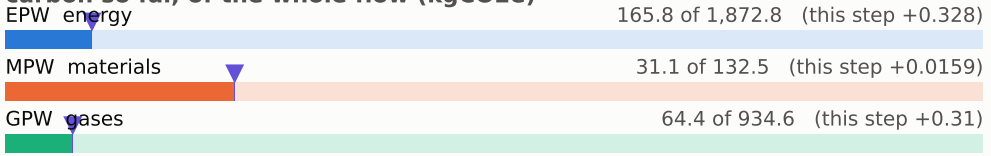

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

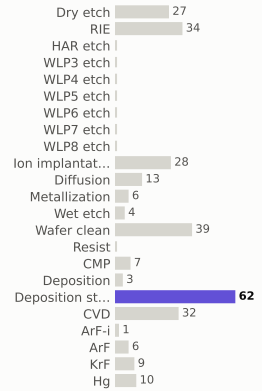

materials deposited (g)

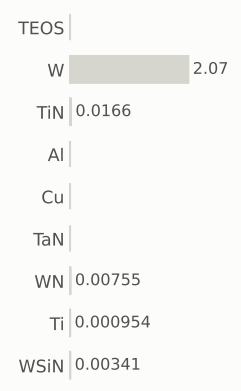

gases emitted (g)

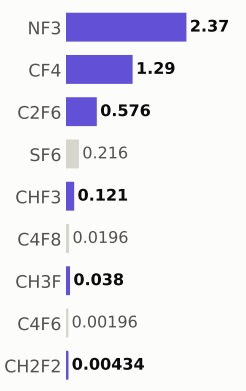

Step #3540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	261.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

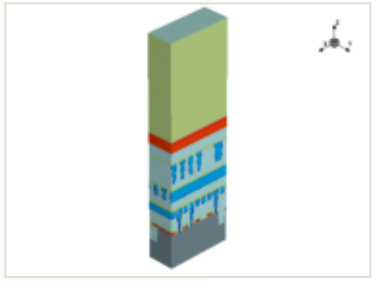

x cut at 0.000 µm

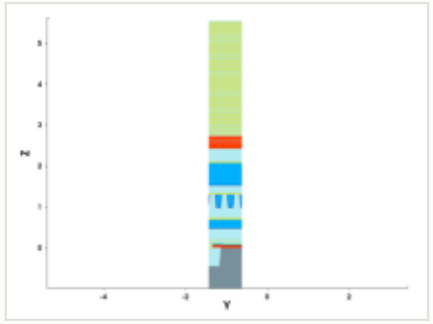

y cut at -1.035 µm

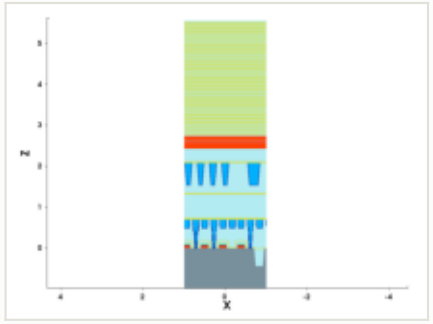

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

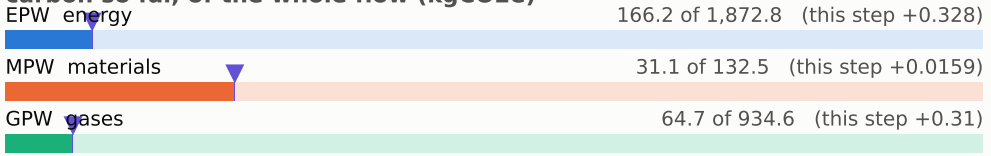

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

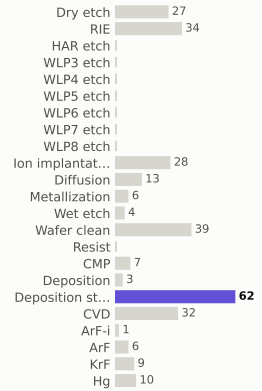

materials deposited (g)

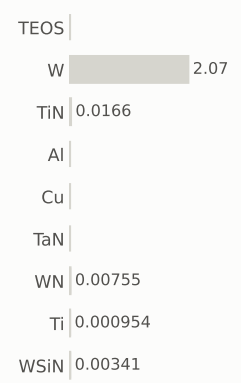

gases emitted (g)

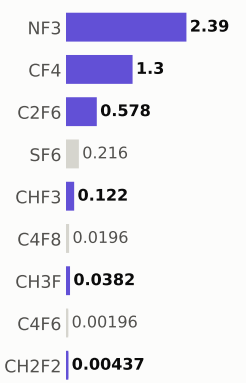

Step #3550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	262.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

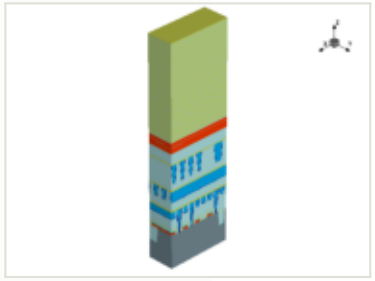

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

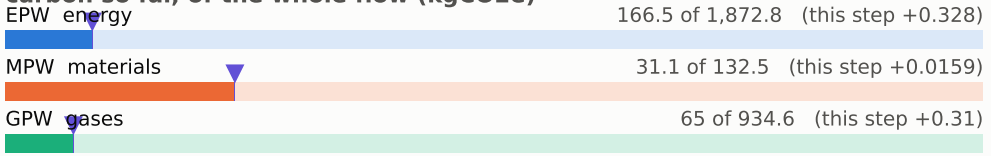

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

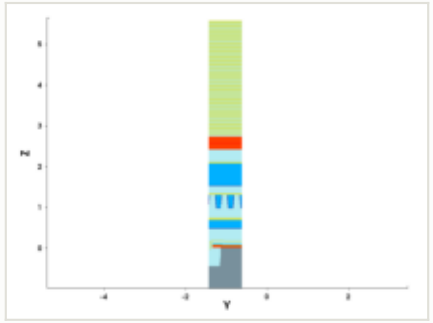

y cut at -1.035 µm

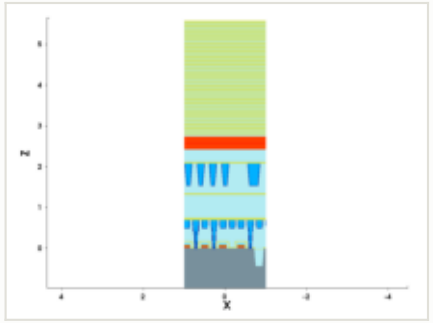

mask for this step

no mask for this step

steps by process area

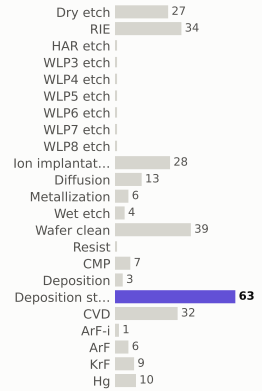

materials deposited (g)

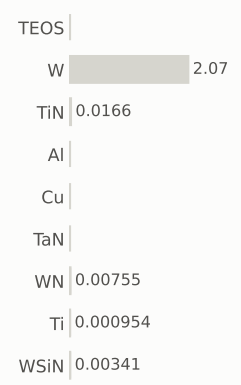

gases emitted (g)

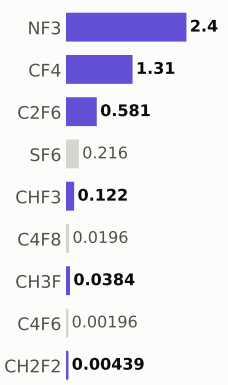

Step #3560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	263.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

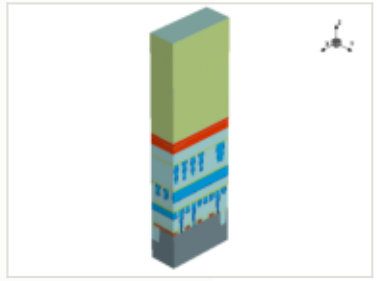

x cut at 0.000 µm

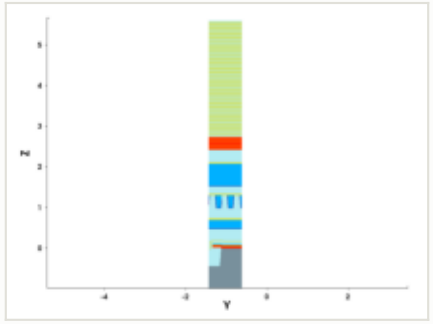

y cut at -1.035 µm

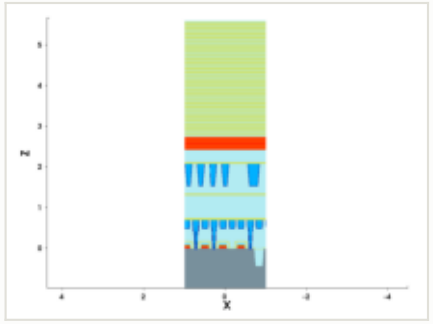

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

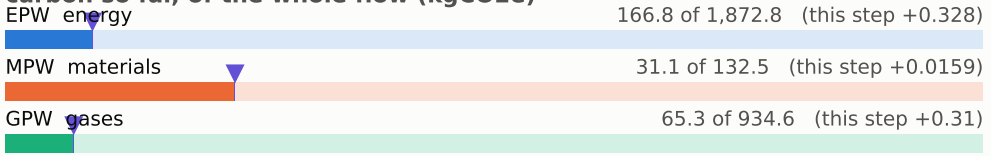

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

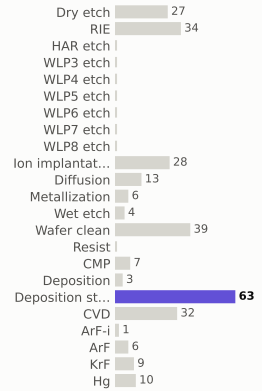

materials deposited (g)

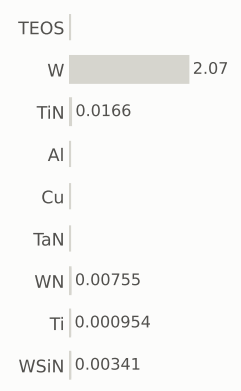

gases emitted (g)

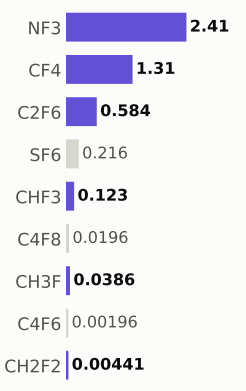

Step #3570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	263.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

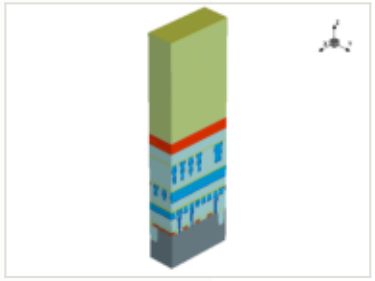

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

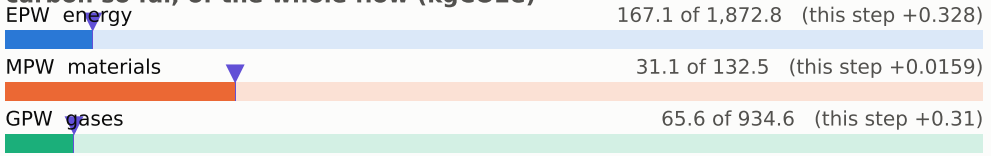

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

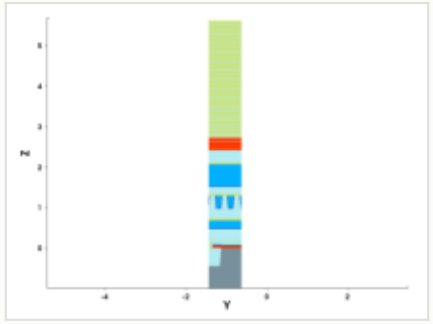

y cut at -1.035 µm

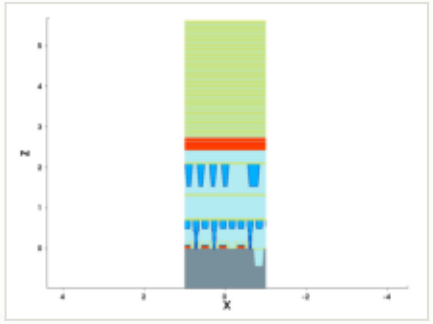

mask for this step

no mask for this step

steps by process area

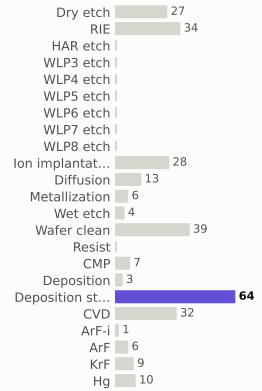

materials deposited (g)

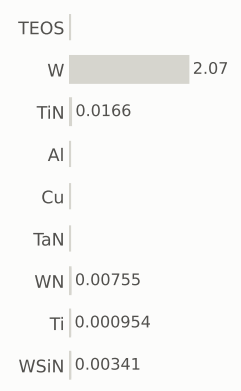

gases emitted (g)

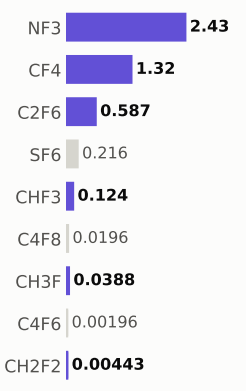

Step #3580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	264.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

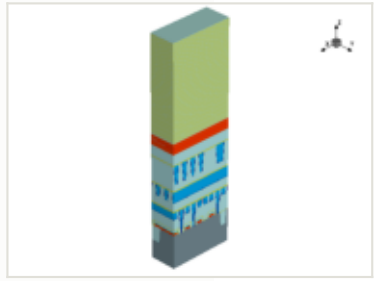

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

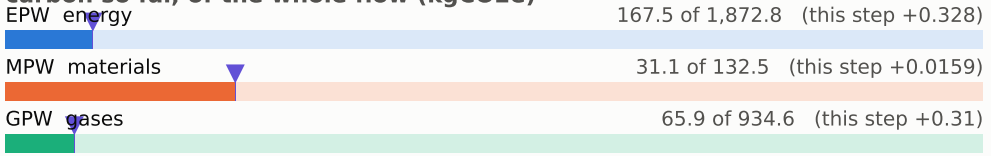

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

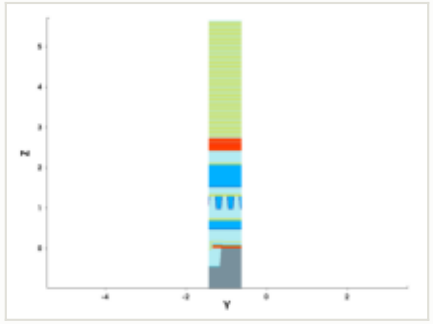

y cut at -1.035 µm

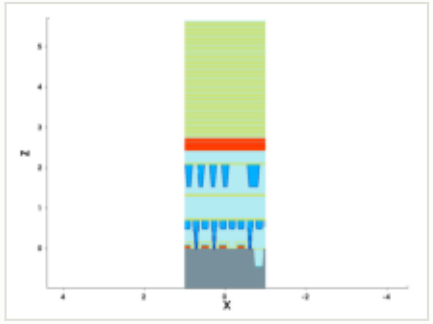

mask for this step

no mask for this step

steps by process area

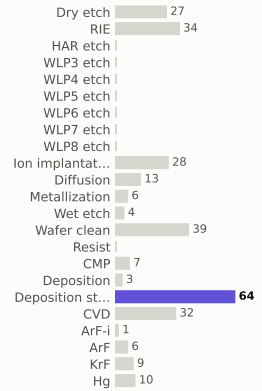

materials deposited (g)

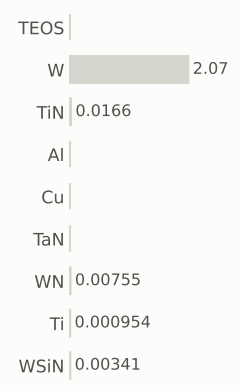

gases emitted (g)

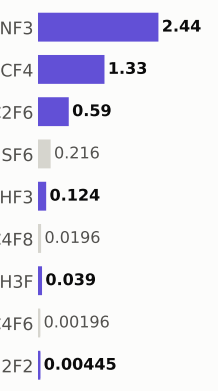

Step #3590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	265.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

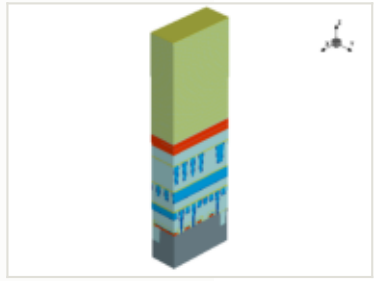

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

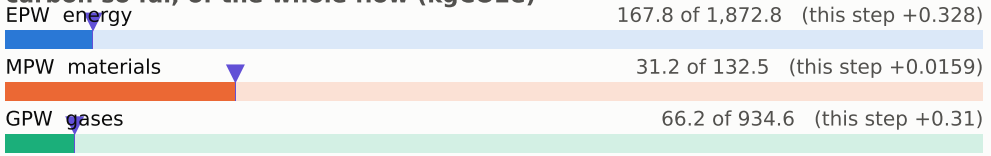

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

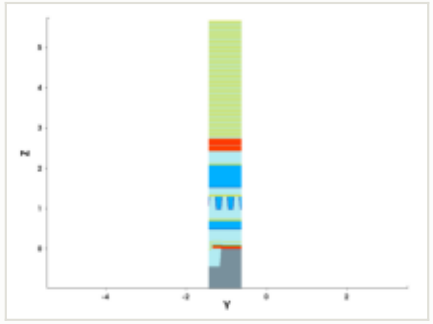

y cut at -1.035 µm

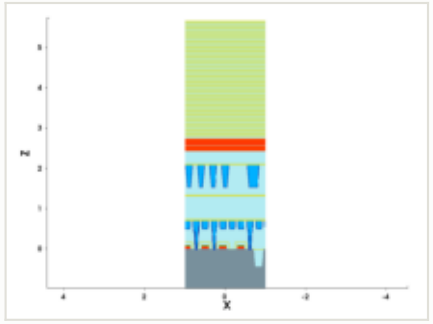

mask for this step

no mask for this step

steps by process area

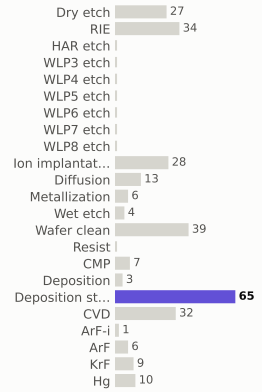

materials deposited (g)

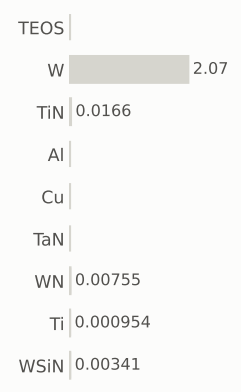

gases emitted (g)

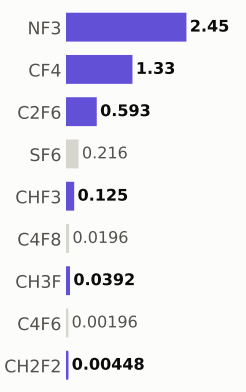

Step #3600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	265.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

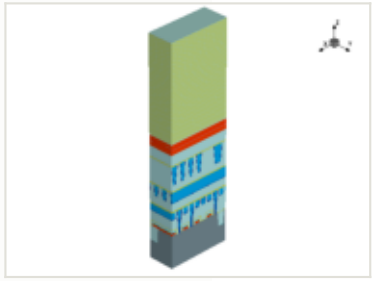

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

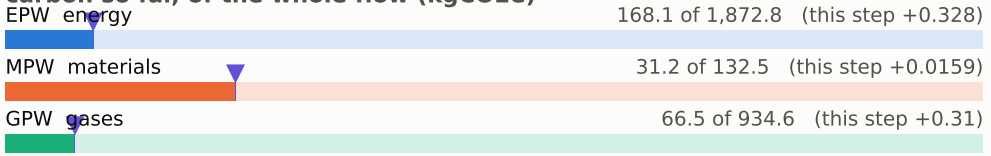

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

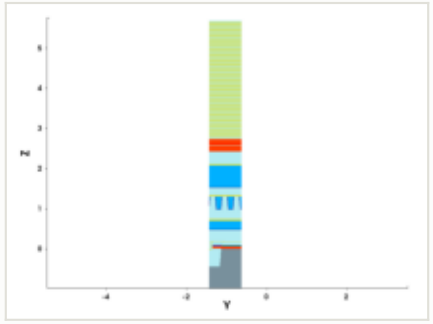

y cut at -1.035 µm

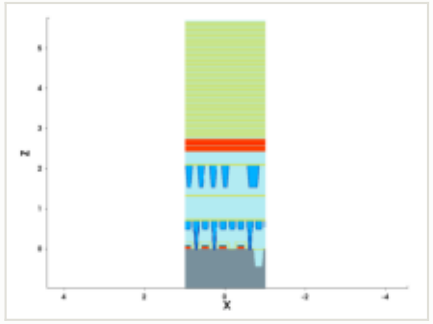

mask for this step

no mask for this step

steps by process area

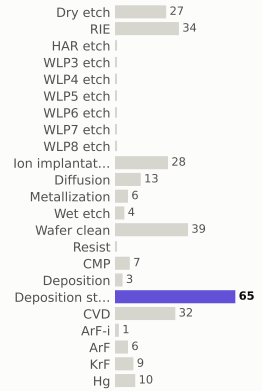

materials deposited (g)

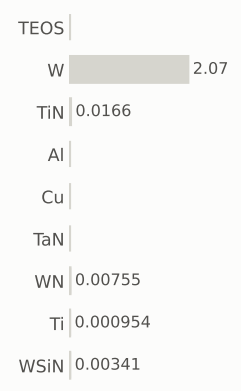

gases emitted (g)

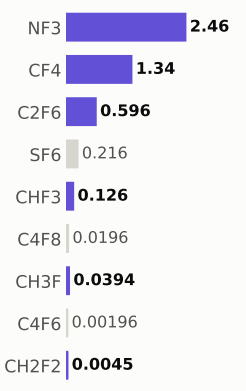

Step #3610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	266.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

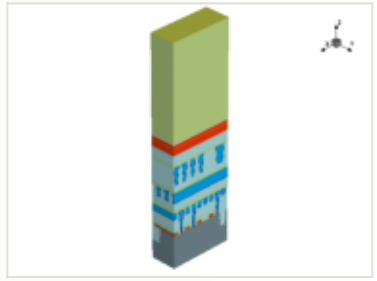

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

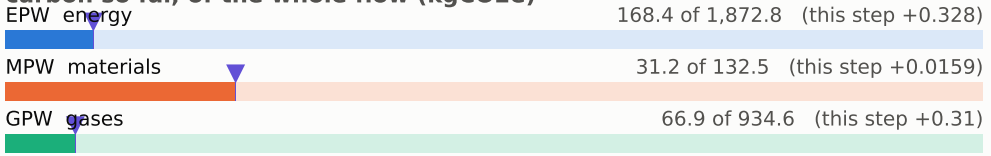

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

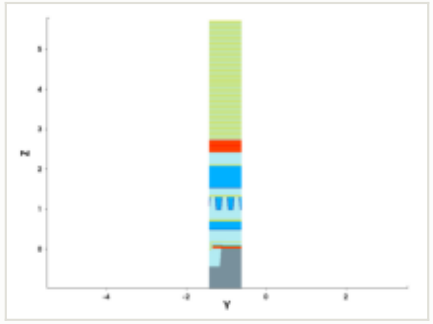

y cut at -1.035 µm

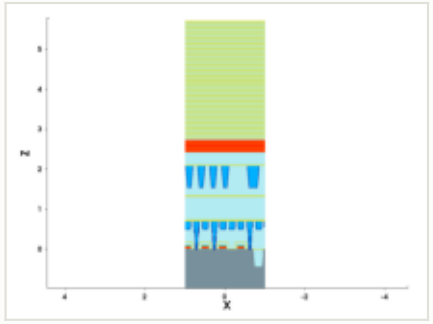

mask for this step

no mask for this step

steps by process area

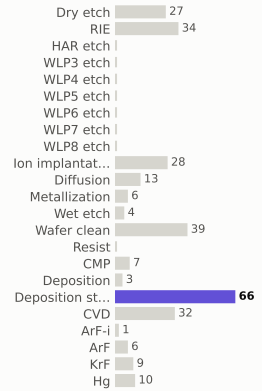

materials deposited (g)

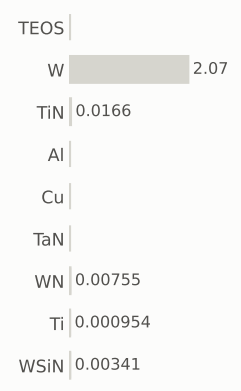

gases emitted (g)

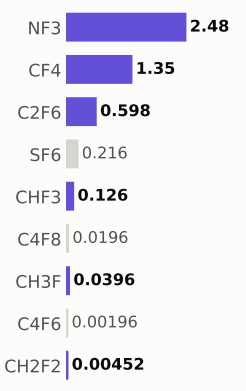

Step #3620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	267.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

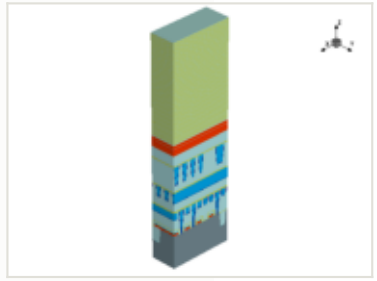

x cut at 0.000 µm

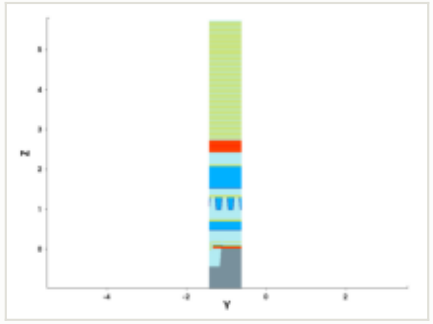

y cut at -1.035 µm

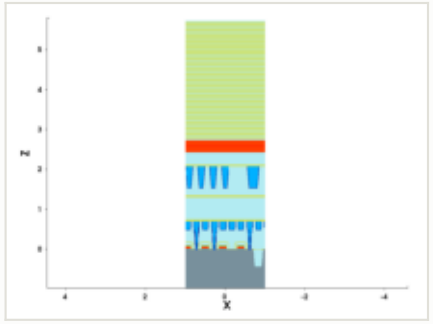

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

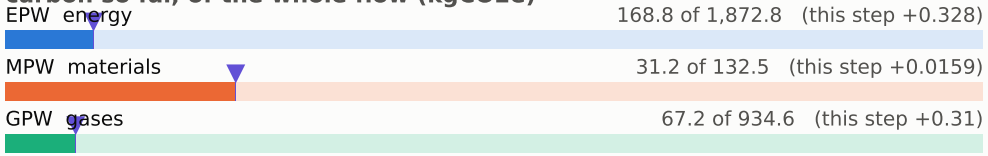

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

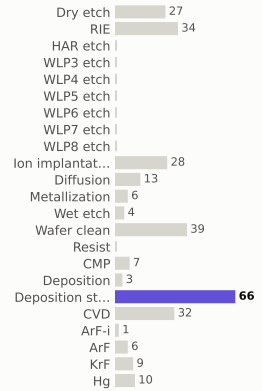

materials deposited (g)

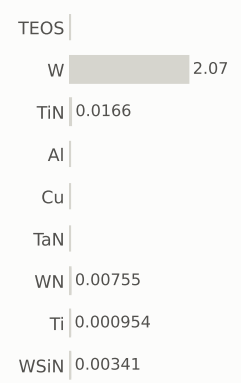

gases emitted (g)

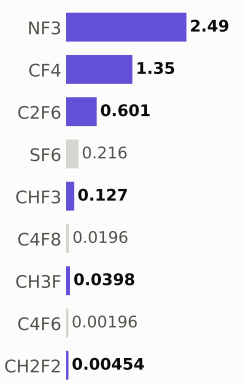

Step #3630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	267.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

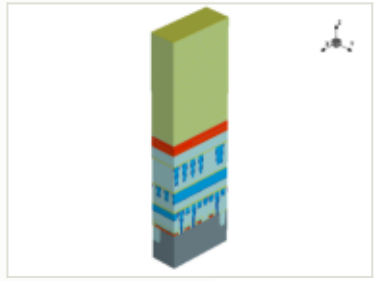

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

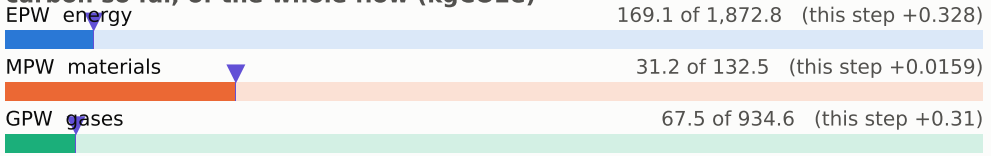

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

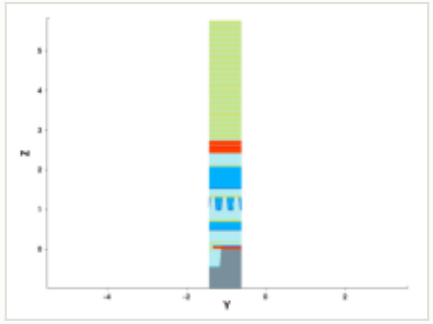

y cut at -1.035 µm

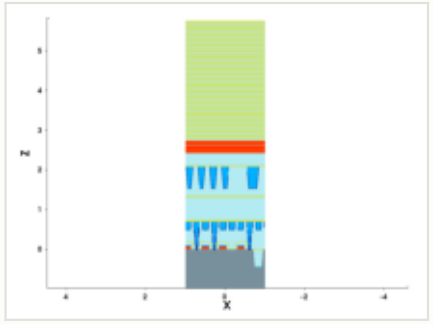

mask for this step

no mask for this step

steps by process area

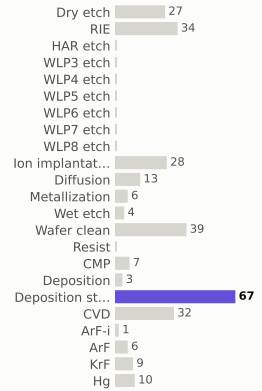

materials deposited (g)

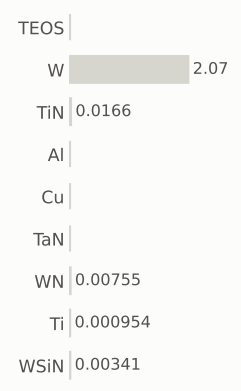

gases emitted (g)

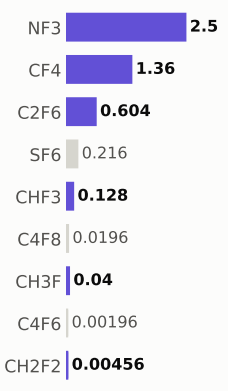

Step #3640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	268.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

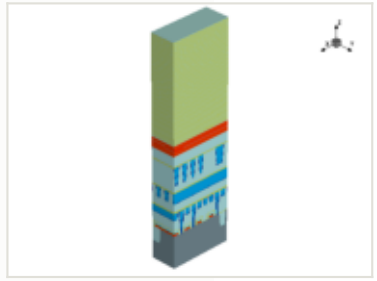

x cut at 0.000 µm

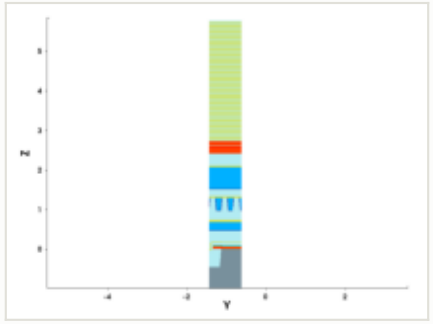

y cut at -1.035 µm

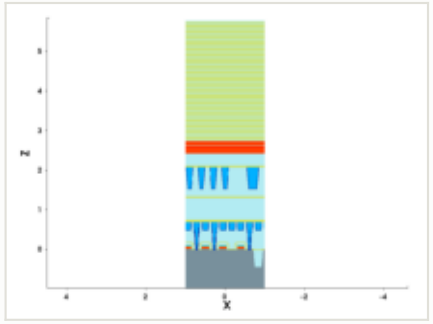

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

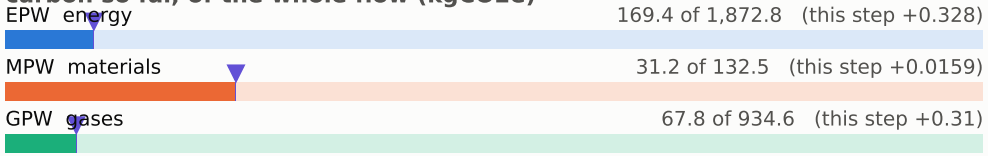

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

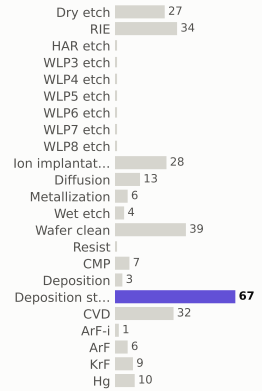

materials deposited (g)

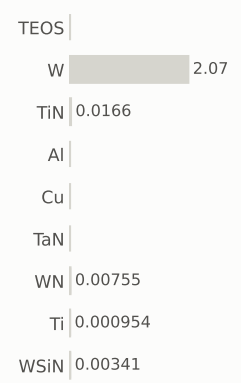

gases emitted (g)

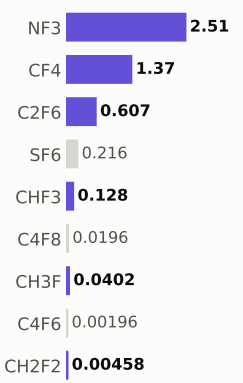

Step #3650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	269.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

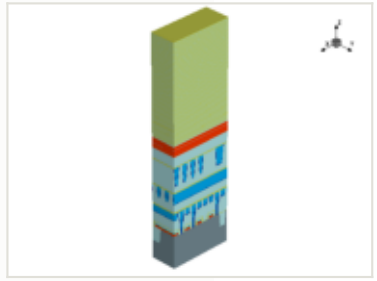

x cut at 0.000 µm

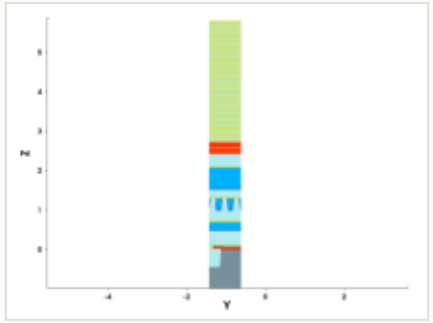

y cut at -1.035 µm

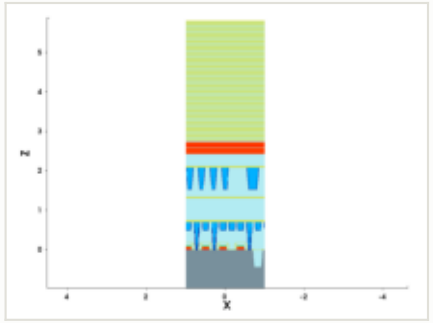

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

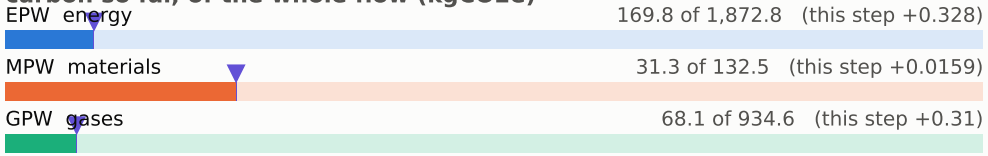

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

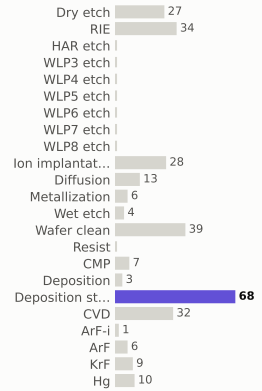

materials deposited (g)

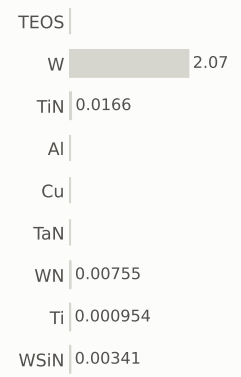

gases emitted (g)

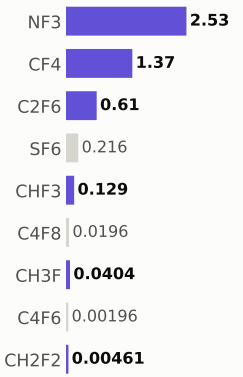

Step #3660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	269.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

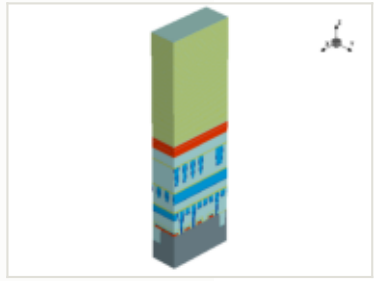

x cut at 0.000 µm

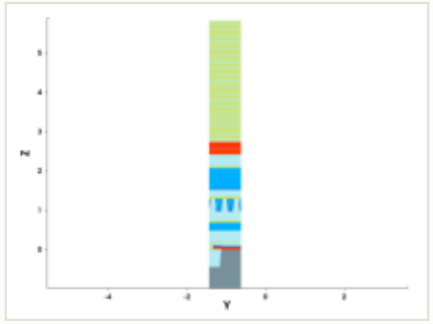

y cut at -1.035 µm

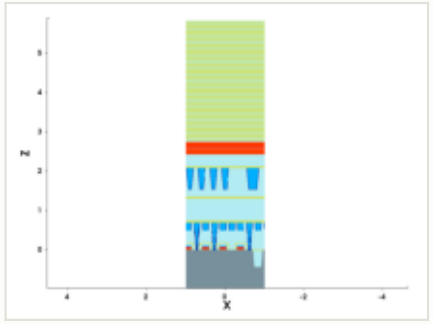

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

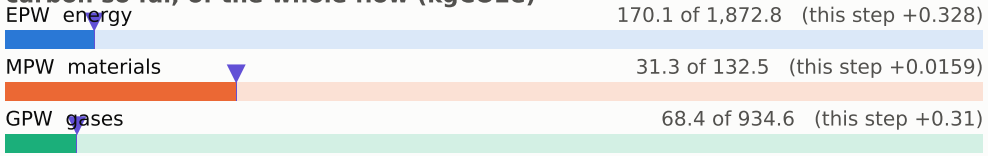

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

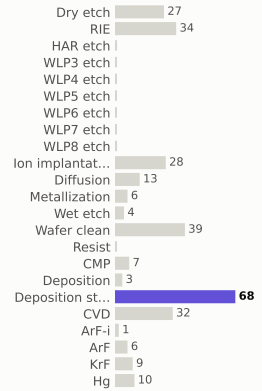

materials deposited (g)

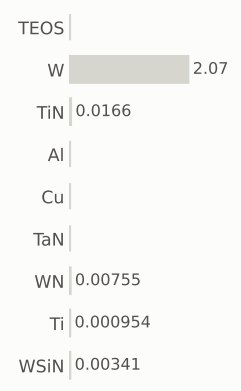

gases emitted (g)

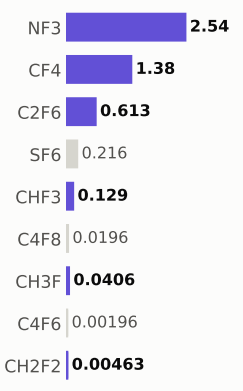

Step #3670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	270.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

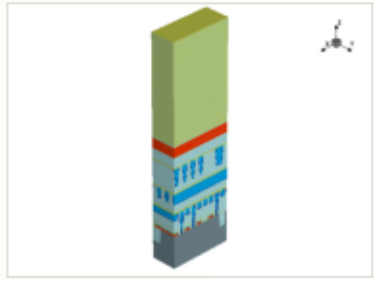

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

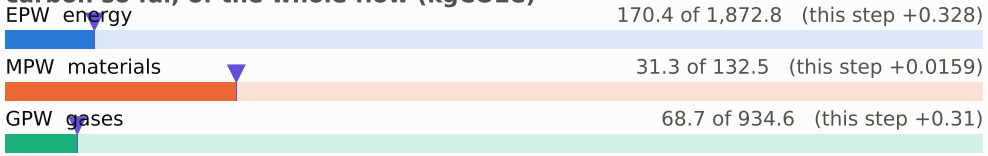

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

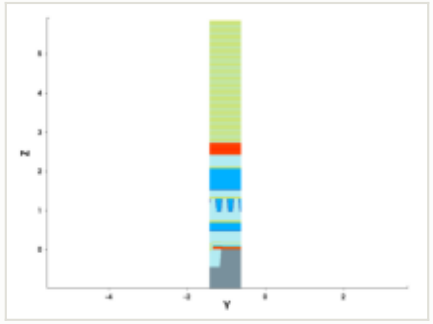

y cut at -1.035 µm

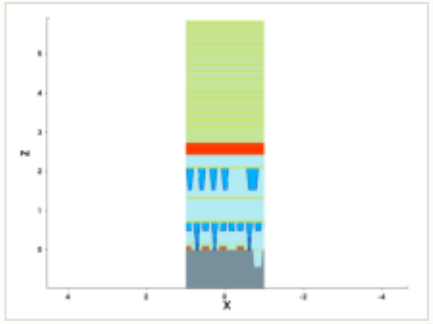

mask for this step

no mask for this step

steps by process area

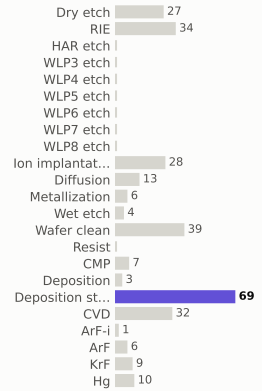

materials deposited (g)

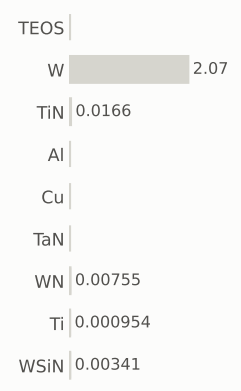

gases emitted (g)

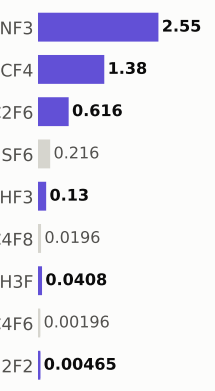

Step #3680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	271.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

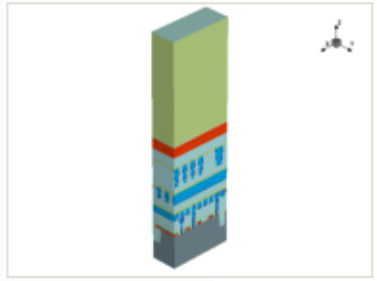

x cut at 0.000 µm

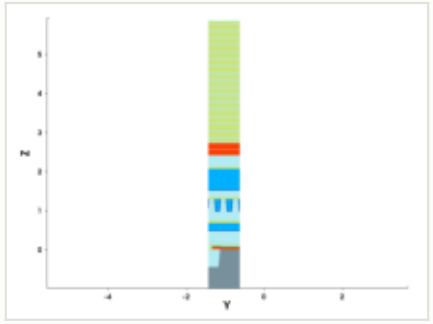

y cut at -1.035 µm

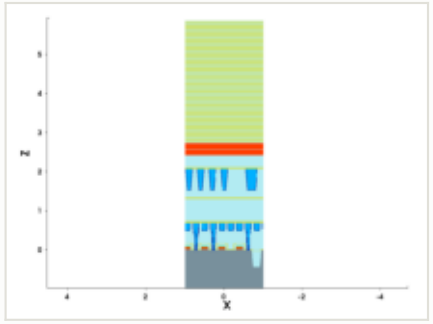

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

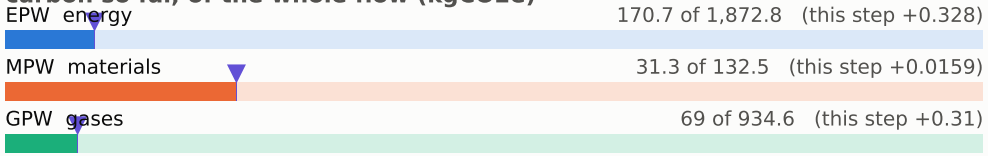

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

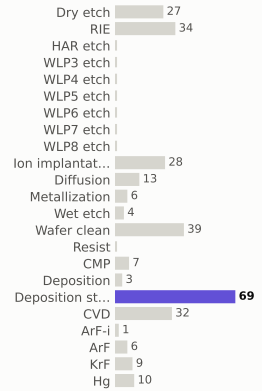

materials deposited (g)

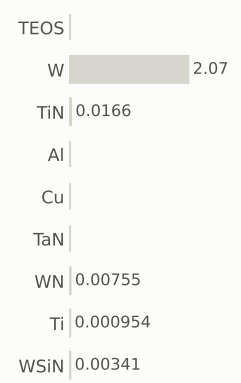

gases emitted (g)

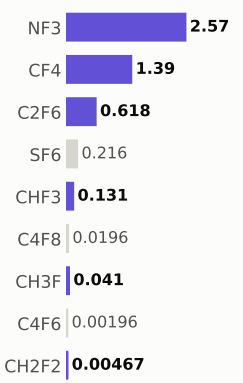

Step #3690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	271.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

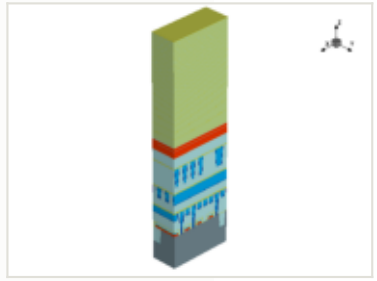

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

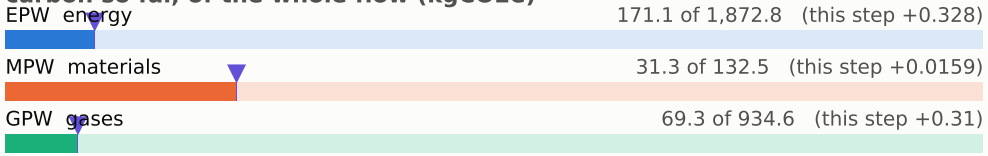

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

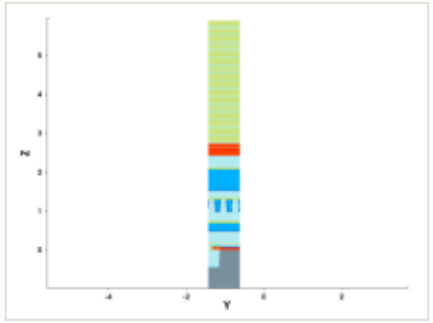

y cut at -1.035 µm

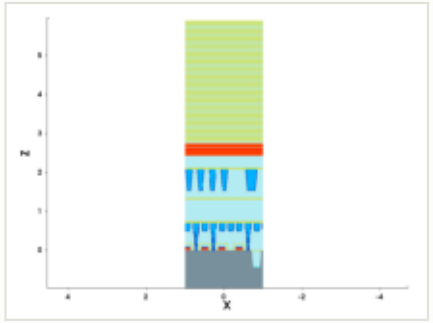

mask for this step

no mask for this step

steps by process area

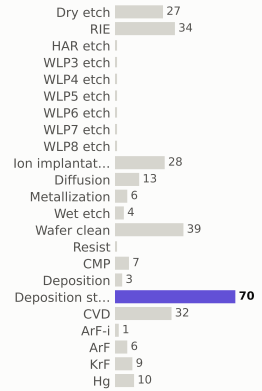

materials deposited (g)

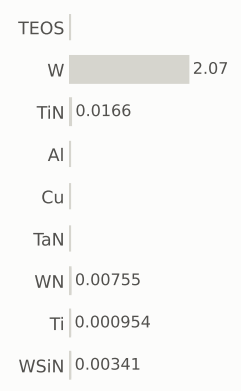

gases emitted (g)

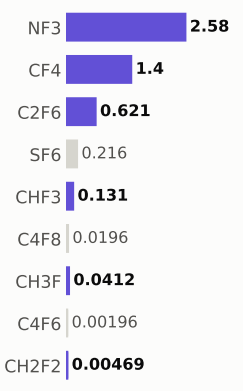

Step #3700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	272.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

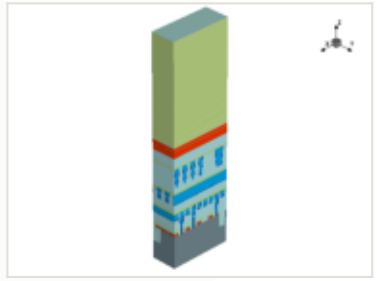

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

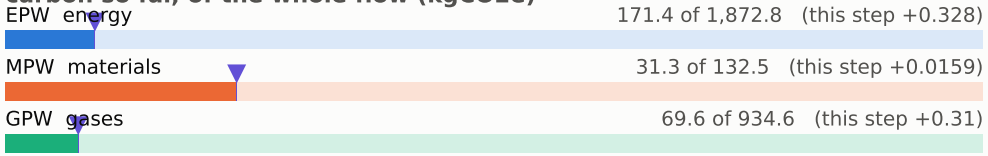

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

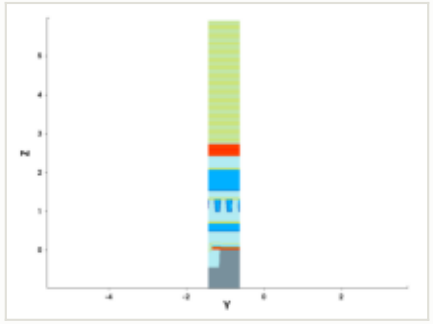

y cut at -1.035 µm

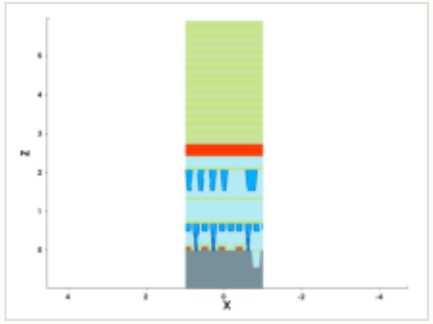

mask for this step

no mask for this step

steps by process area

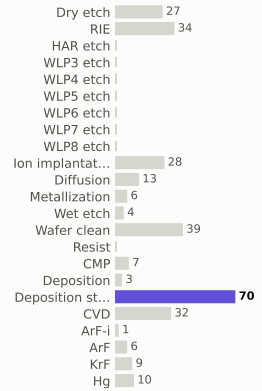

materials deposited (g)

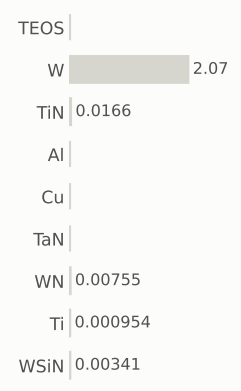

gases emitted (g)

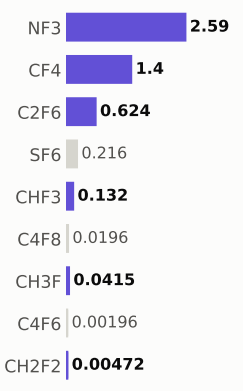

Step #3710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	273.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

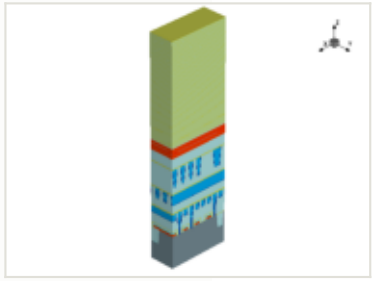

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

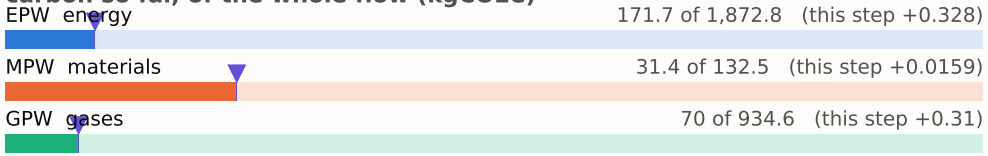

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

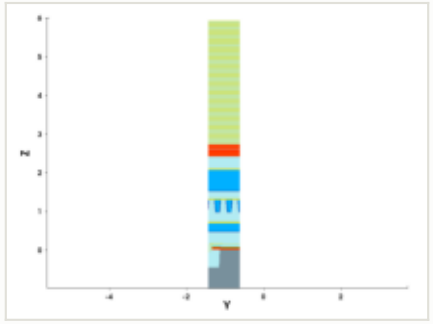

y cut at -1.035 µm

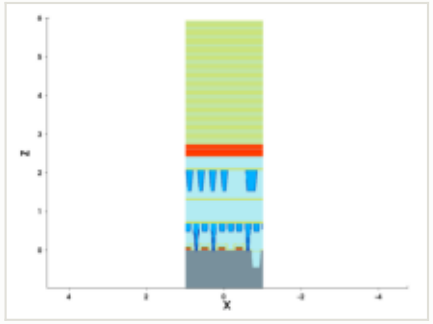

mask for this step

no mask for this step

steps by process area

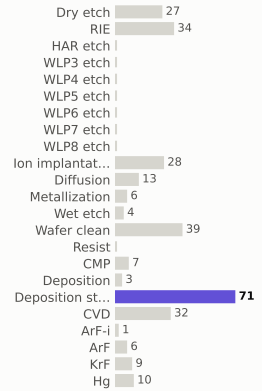

materials deposited (g)

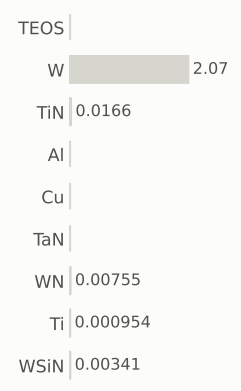

gases emitted (g)

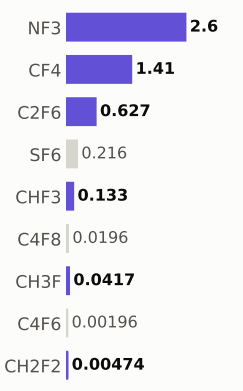

Step #3720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	273.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

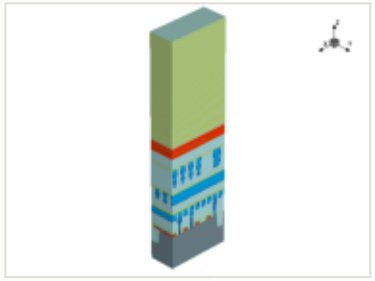

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

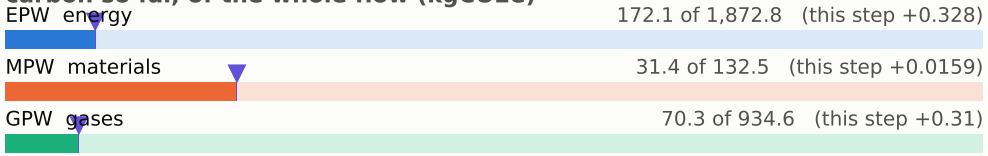

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

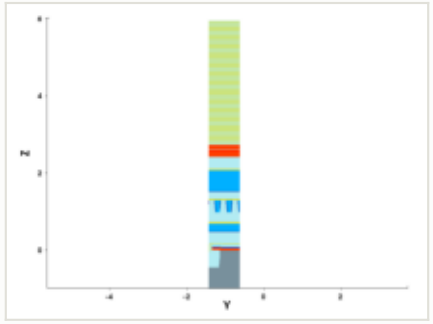

y cut at -1.035 µm

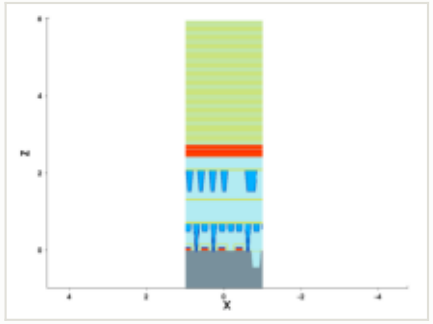

mask for this step

no mask for this step

steps by process area

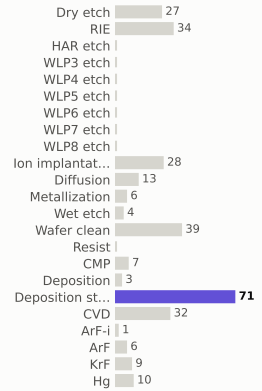

materials deposited (g)

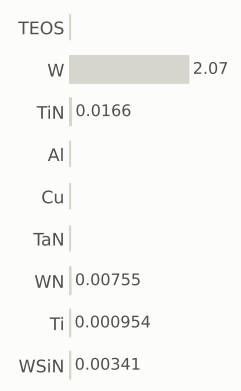

gases emitted (g)

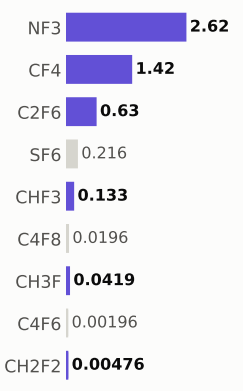

Step #3730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	274.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

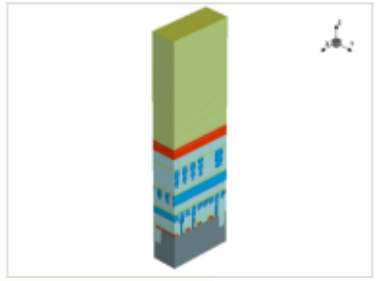

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

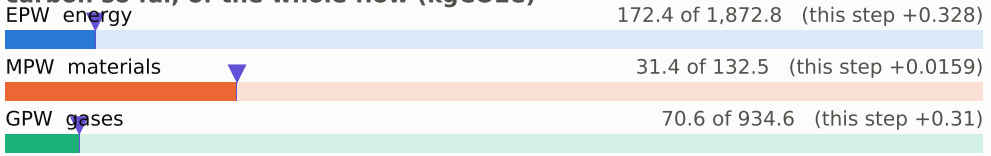

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

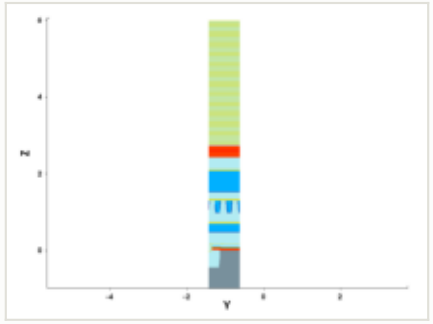

y cut at -1.035 µm

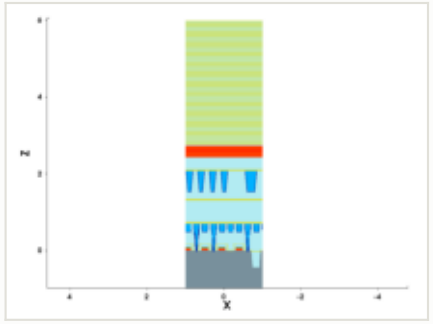

mask for this step

no mask for this step

steps by process area

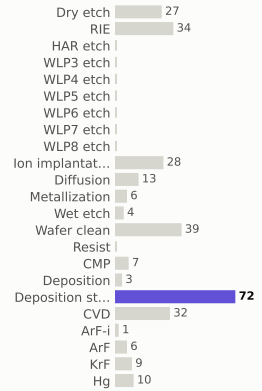

materials deposited (g)

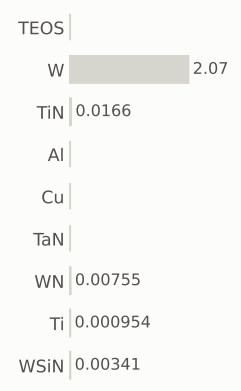

gases emitted (g)

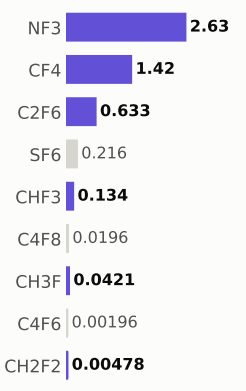

Step #3740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	275.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

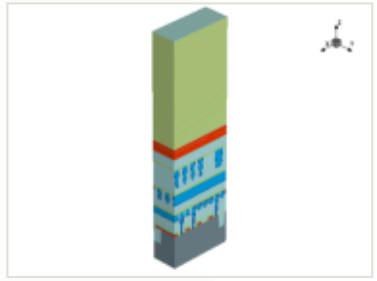

x cut at 0.000 µm

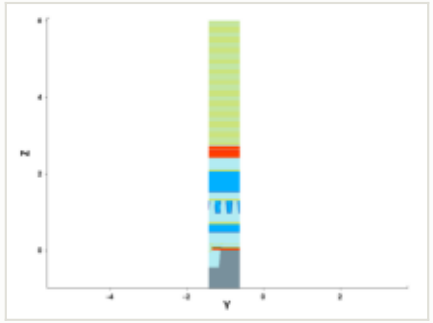

y cut at -1.035 µm

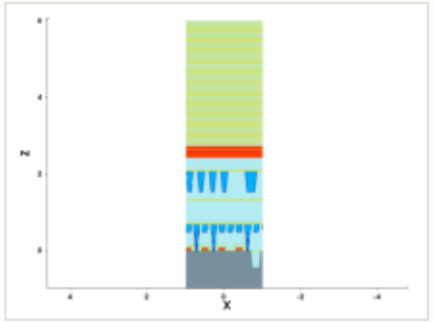

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

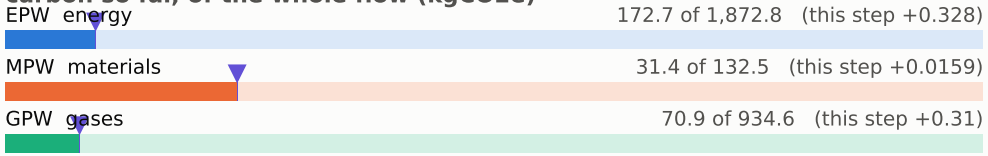

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

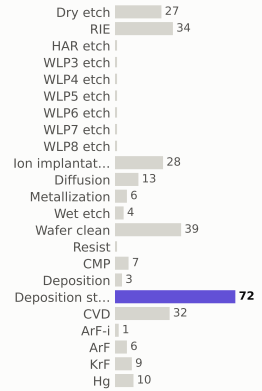

materials deposited (g)

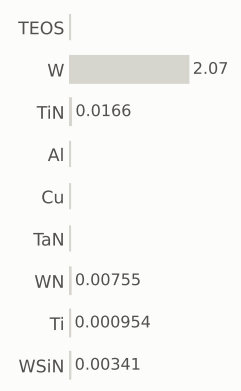

gases emitted (g)

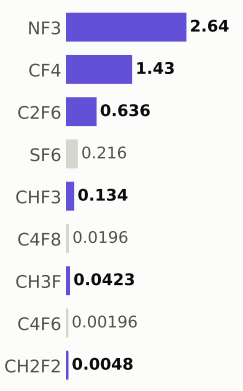

Step #3750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	275.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

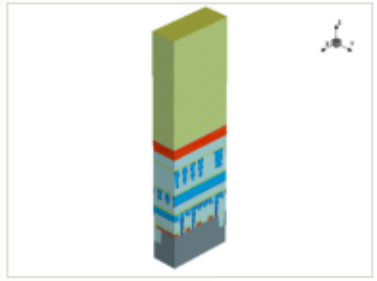

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

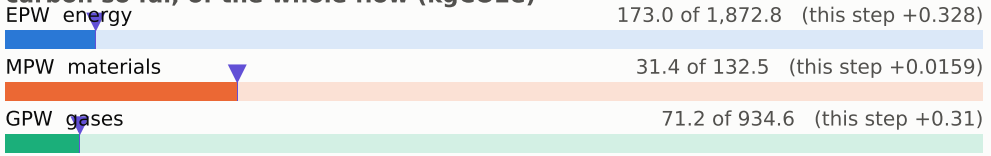

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

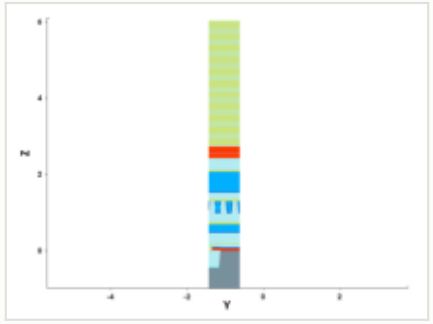

y cut at -1.035 µm

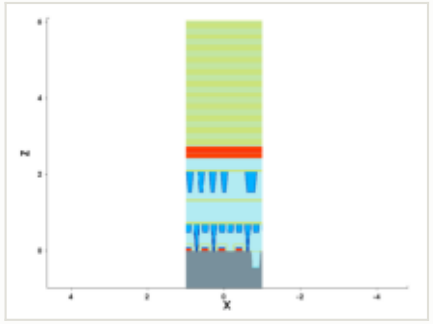

mask for this step

no mask for this step

steps by process area

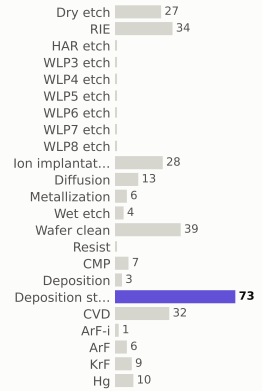

materials deposited (g)

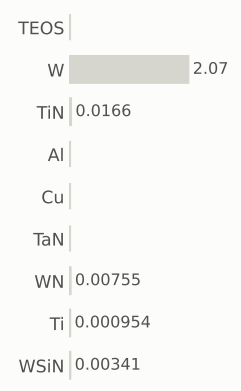

gases emitted (g)

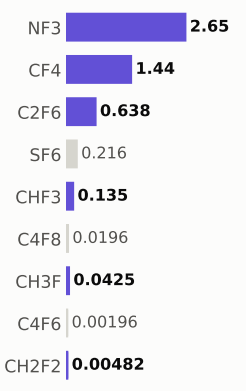

Step #3760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	276.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

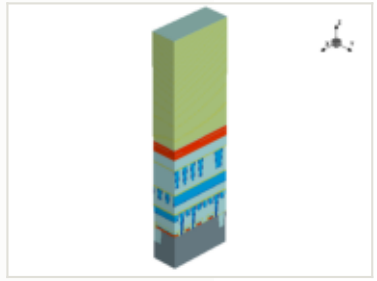

x cut at 0.000 µm

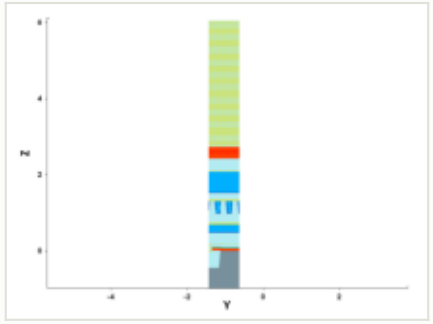

y cut at -1.035 µm

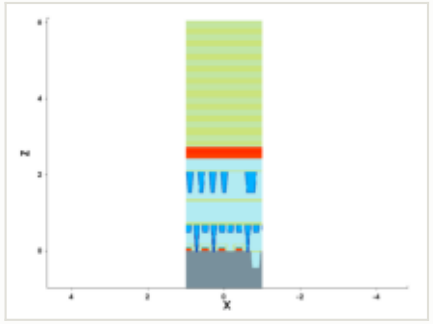

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

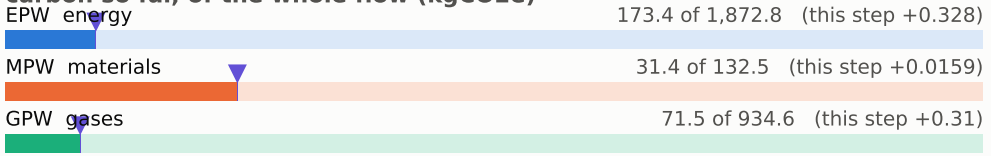

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

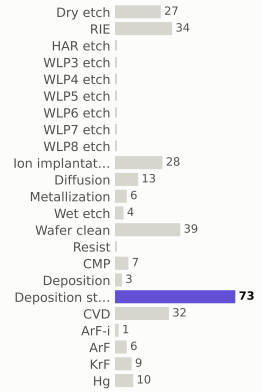

materials deposited (g)

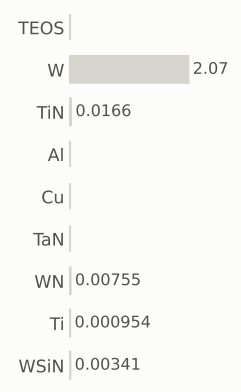

gases emitted (g)

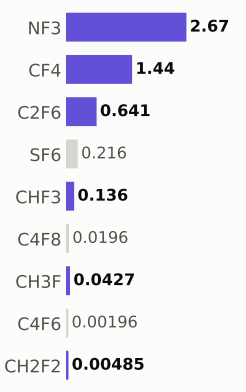

Step #3770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	277.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

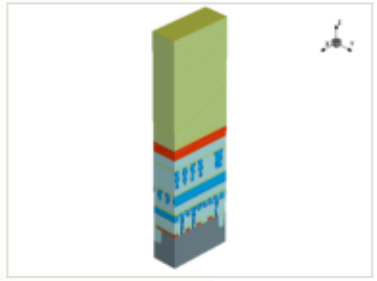

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

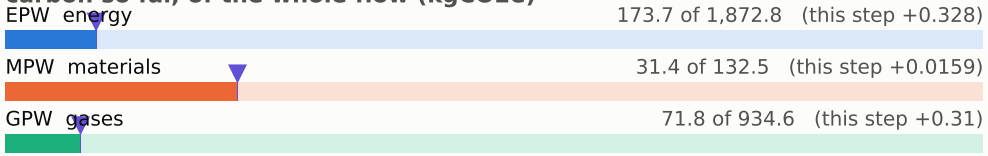

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

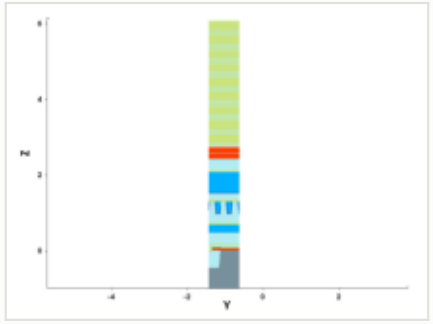

y cut at -1.035 µm

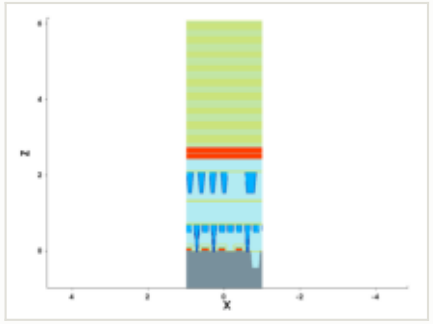

mask for this step

no mask for this step

steps by process area

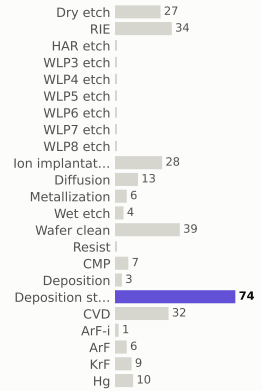

materials deposited (g)

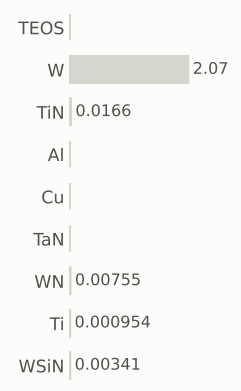

gases emitted (g)

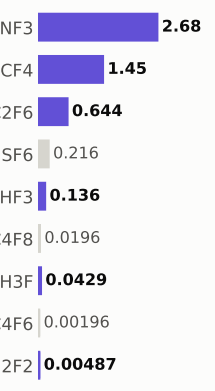

Step #3780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	277.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

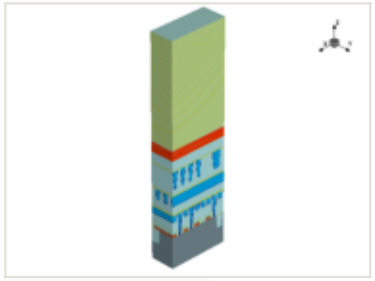

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

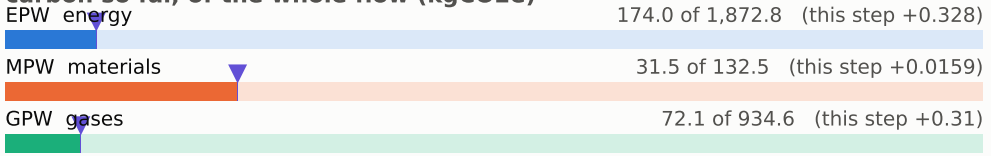

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

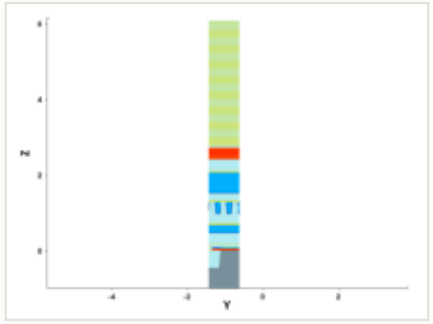

y cut at -1.035 µm

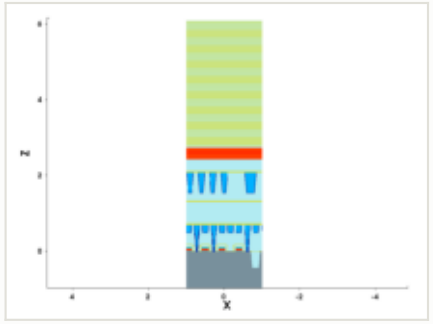

mask for this step

no mask for this step

steps by process area

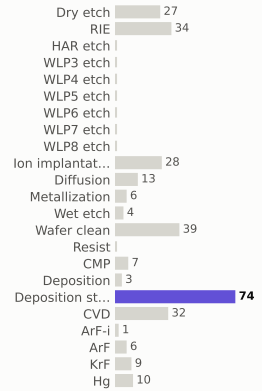

materials deposited (g)

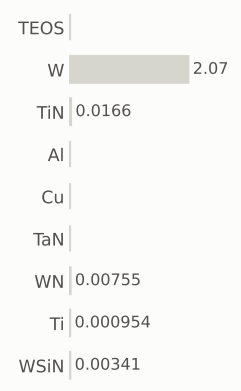

gases emitted (g)

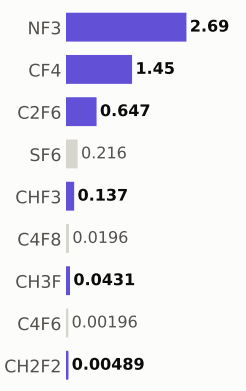

Step #3790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	278.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

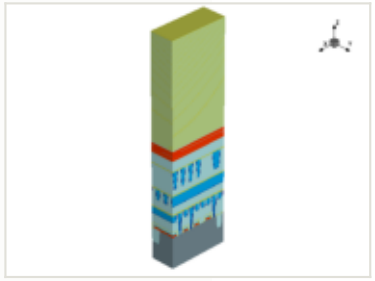

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

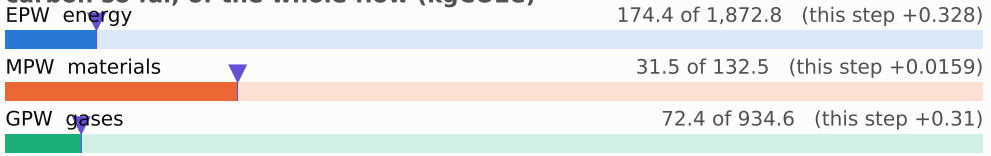

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

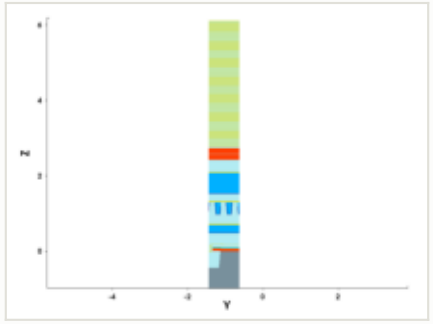

y cut at -1.035 µm

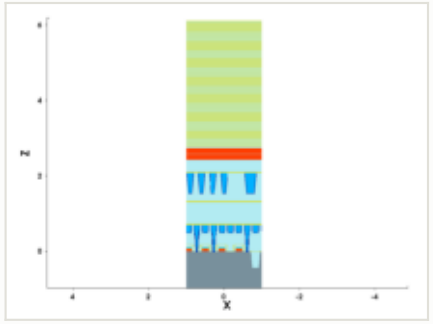

mask for this step

no mask for this step

steps by process area

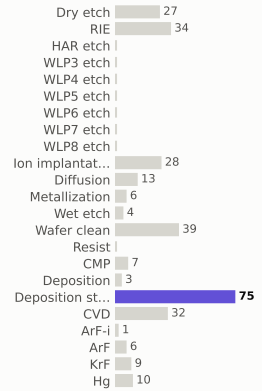

materials deposited (g)

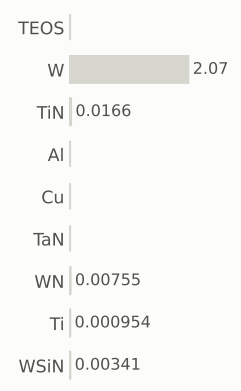

gases emitted (g)

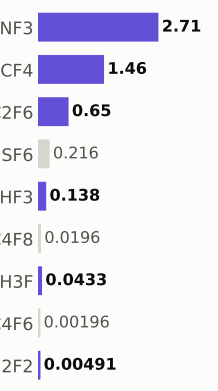

Step #3800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	278.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

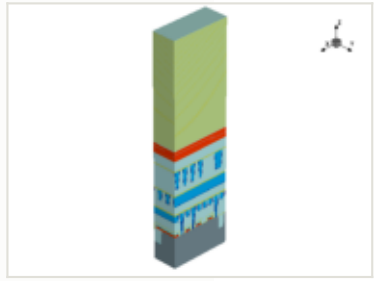

x cut at 0.000 µm

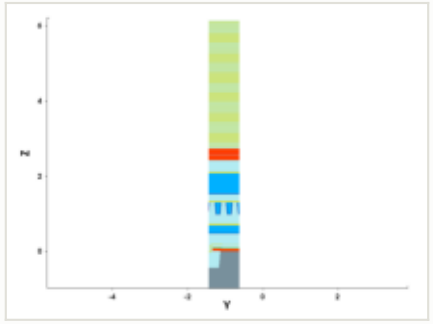

y cut at -1.035 µm

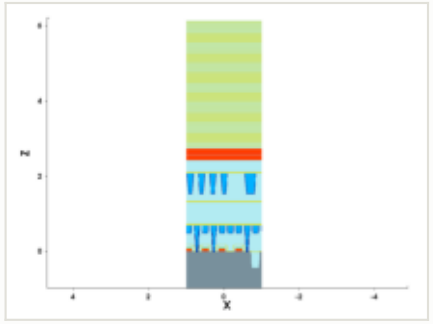

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

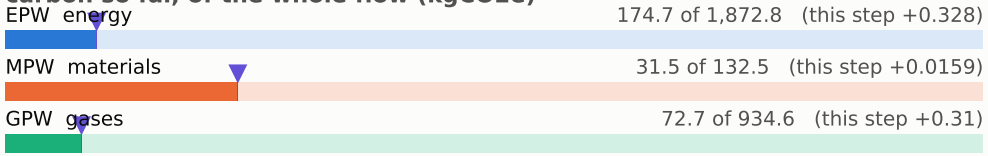

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

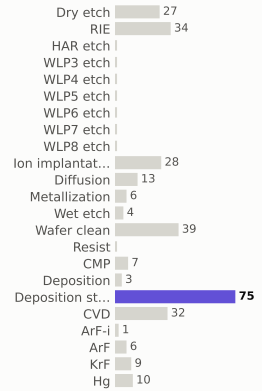

materials deposited (g)

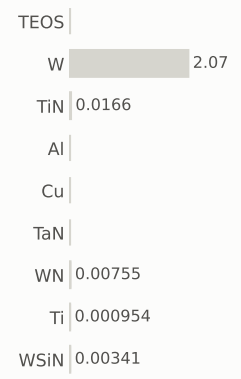

gases emitted (g)

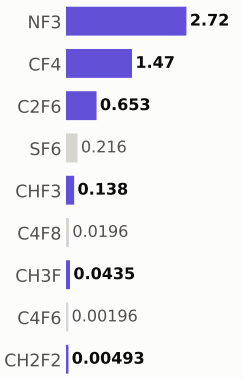

Step #3810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	279.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

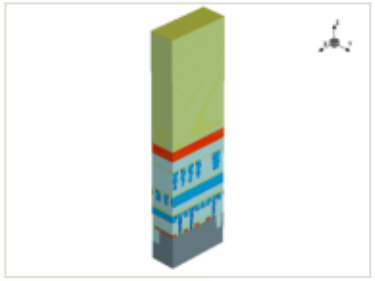

x cut at 0.000 µm

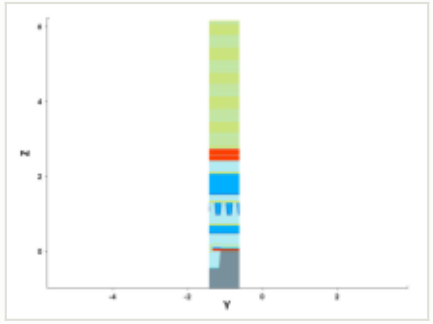

y cut at -1.035 µm

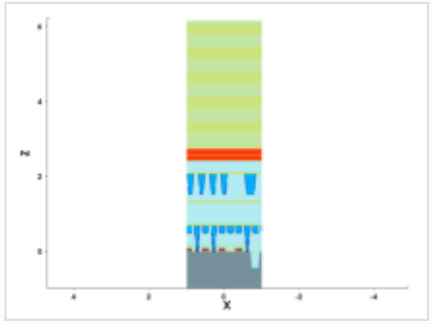

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

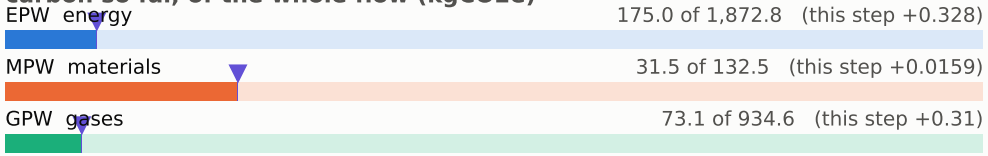

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

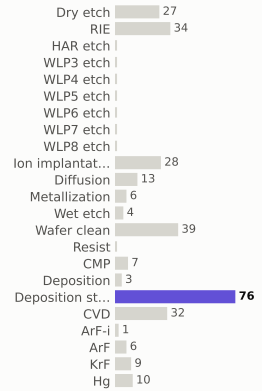

materials deposited (g)

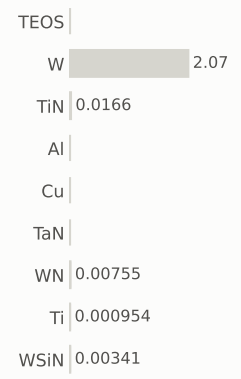

gases emitted (g)



Step #3820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	280.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

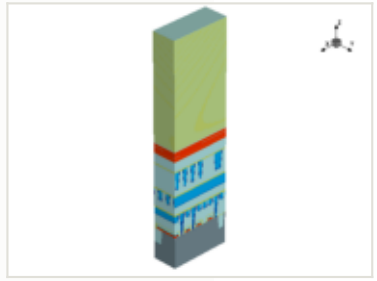

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

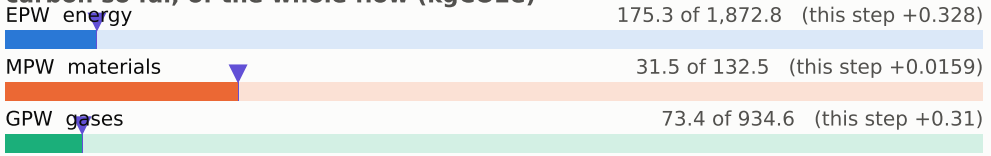

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

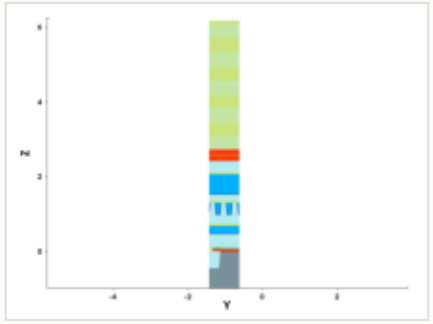

y cut at -1.035 µm

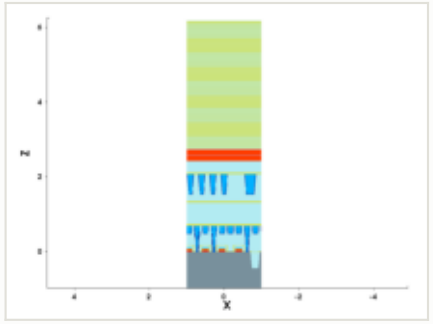

mask for this step

no mask for this step

steps by process area

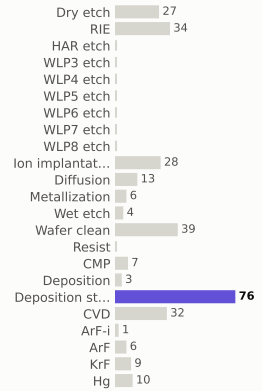

materials deposited (g)

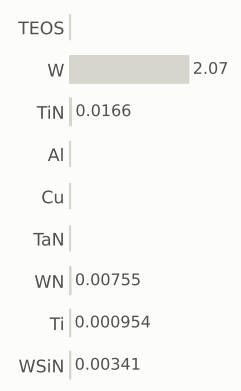

gases emitted (g)

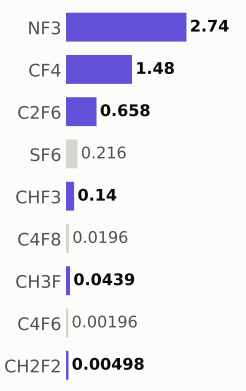

Step #3830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	280.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

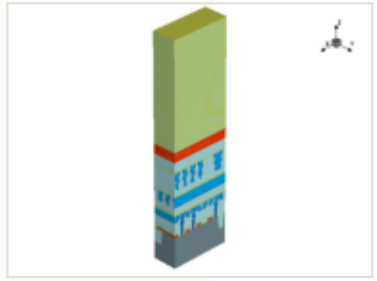

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

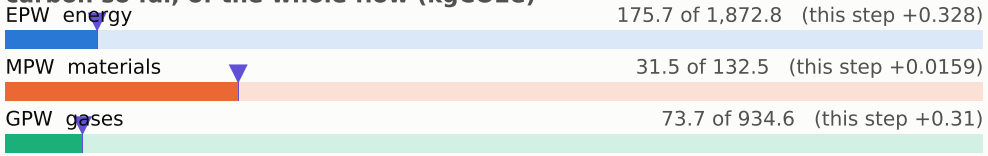

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

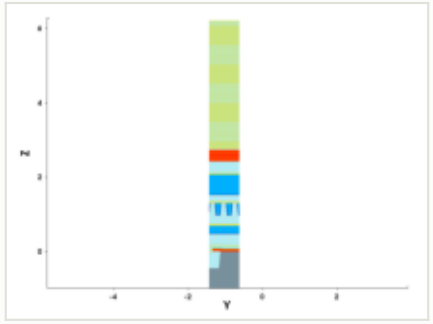

y cut at -1.035 µm

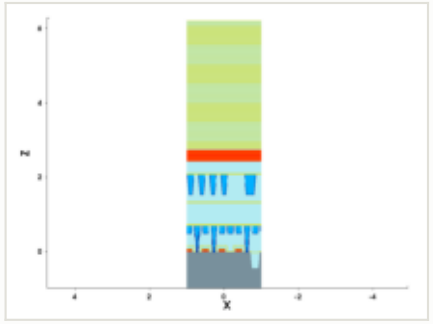

mask for this step

no mask for this step

steps by process area

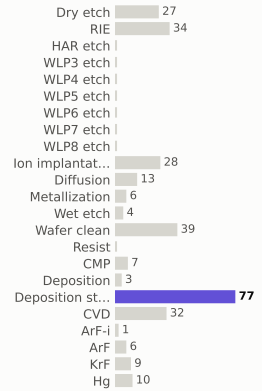

materials deposited (g)

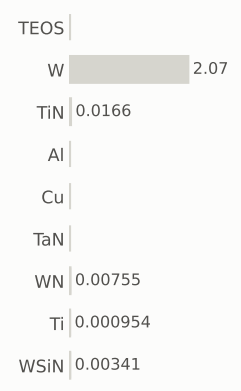

gases emitted (g)

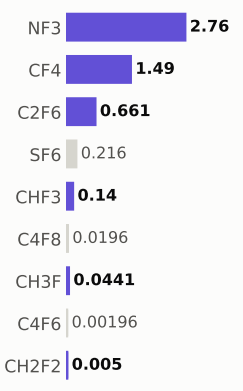

Step #3840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	281.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

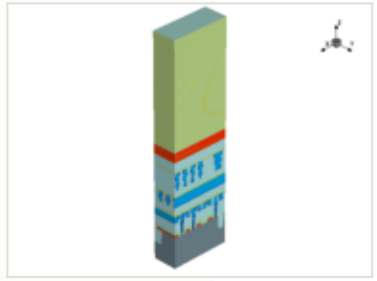

x cut at 0.000 µm

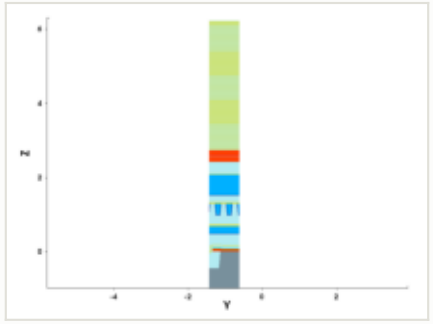

y cut at -1.035 µm

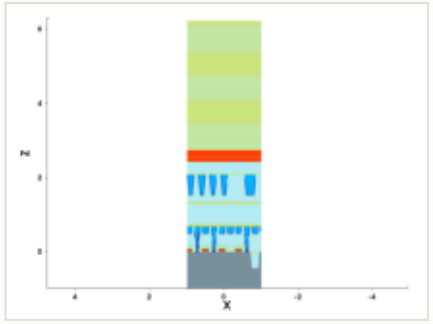

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

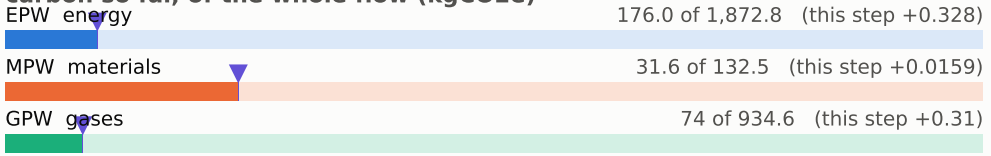

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

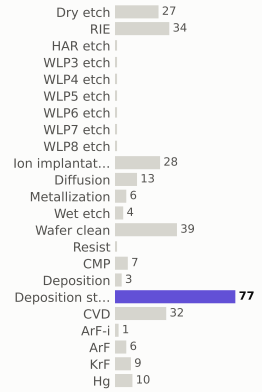

materials deposited (g)

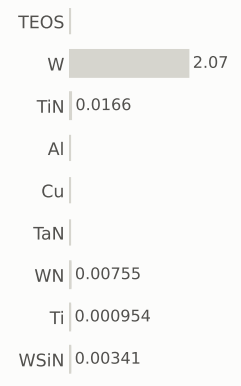

gases emitted (g)

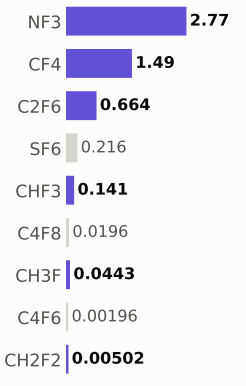

Step #3850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	282.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

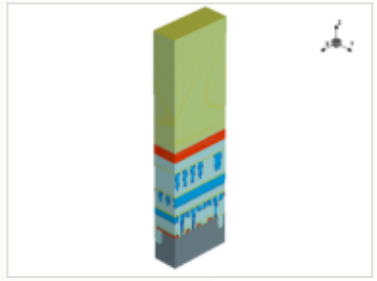

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

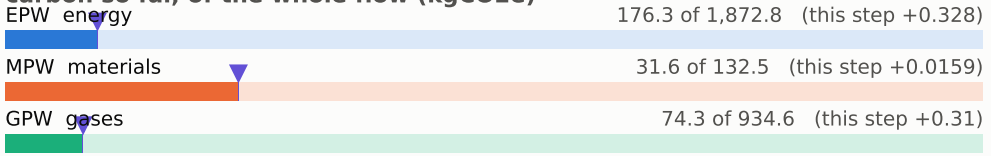

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

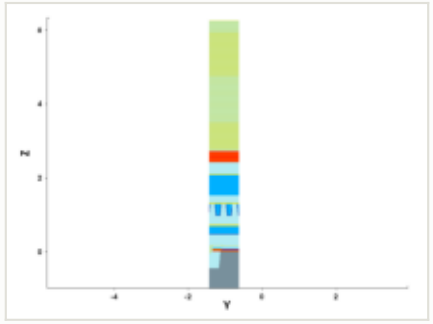

y cut at -1.035 µm

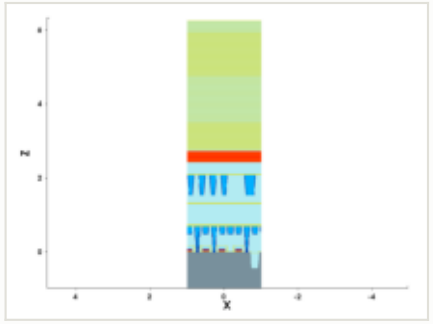

mask for this step

no mask for this step

steps by process area

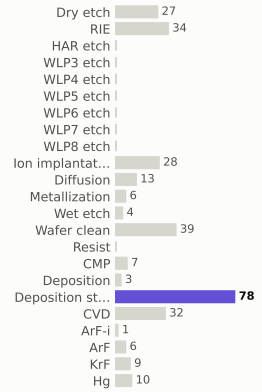

materials deposited (g)

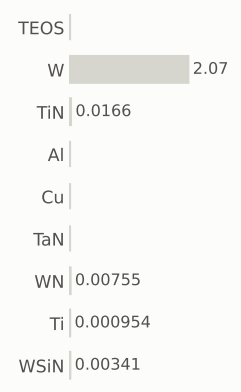

gases emitted (g)



Step #3860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	282.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

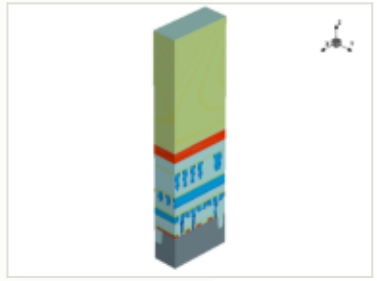

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

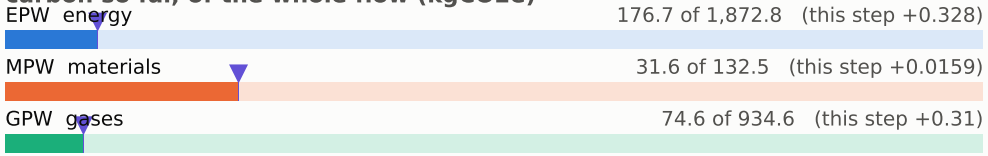

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

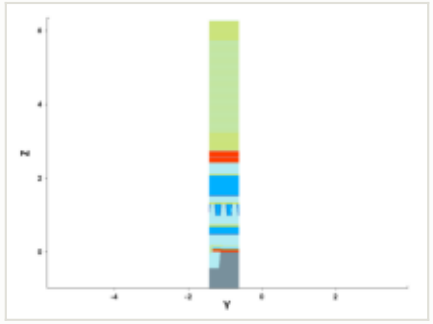

y cut at -1.035 µm

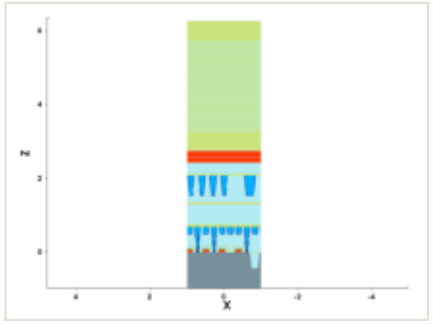

mask for this step

no mask for this step

steps by process area

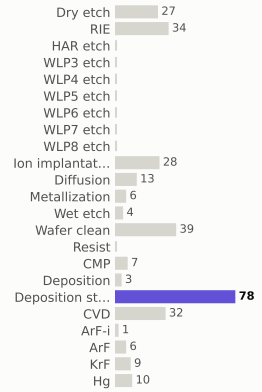

materials deposited (g)

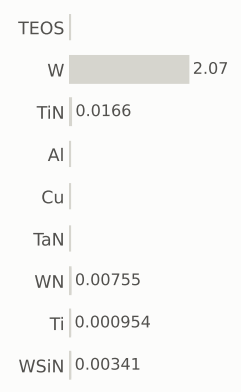

gases emitted (g)



Step #3870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	283.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

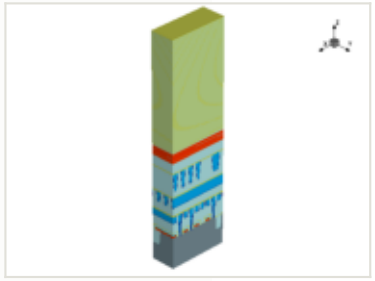

x cut at 0.000 µm

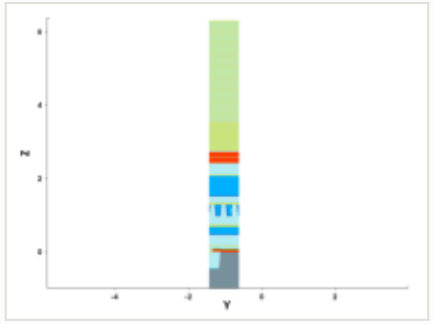

y cut at -1.035 µm

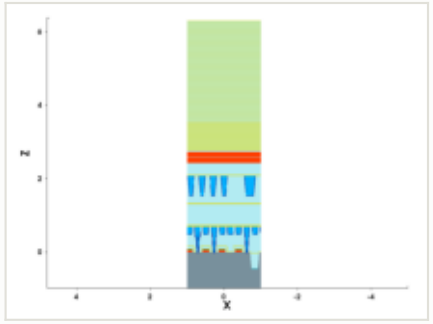

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 177.0 of 1,872.8 (this step +0.328)

MPW materials — 31.6 of 132.5 (this step +0.0159)

GPW gases — 74.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

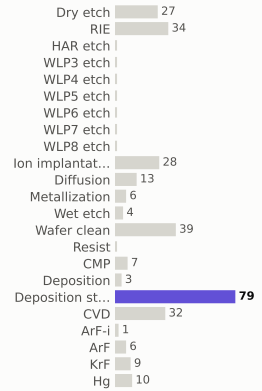

materials deposited (g)

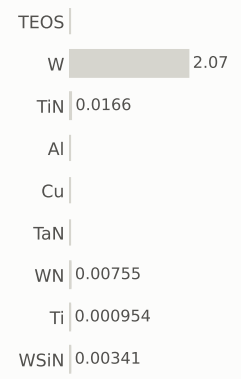

gases emitted (g)



Step #3880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	284.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

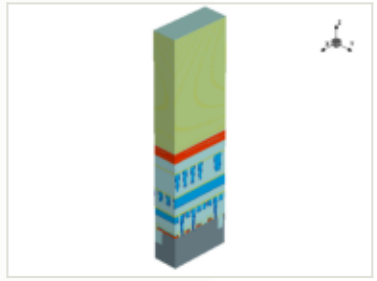

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

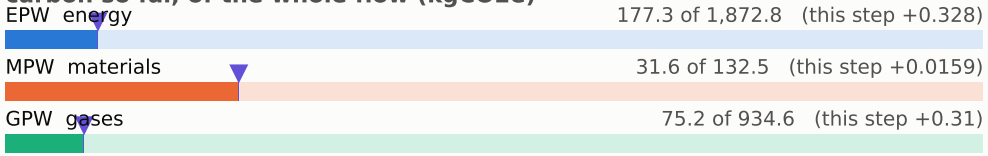

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

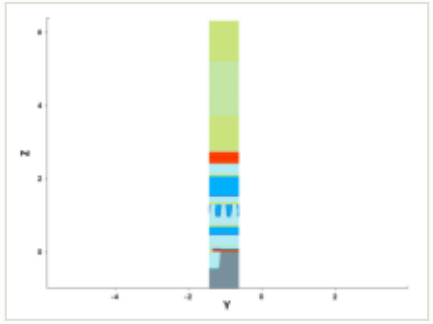

y cut at -1.035 µm

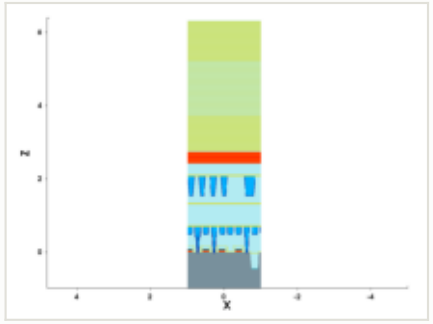

mask for this step

no mask for this step

steps by process area

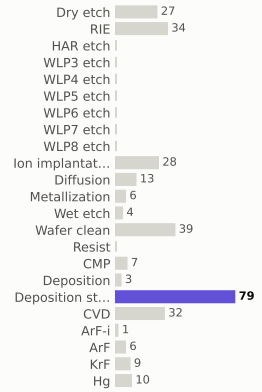

materials deposited (g)

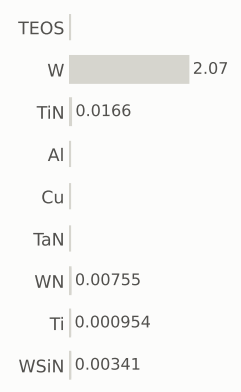

gases emitted (g)

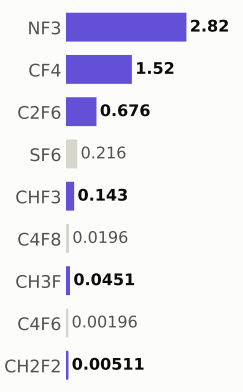

Step #3890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	284.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

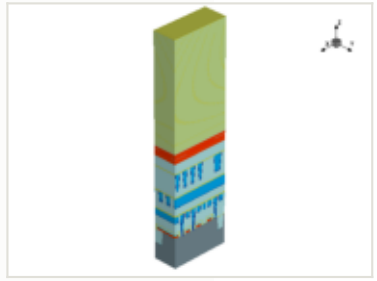

x cut at 0.000 µm

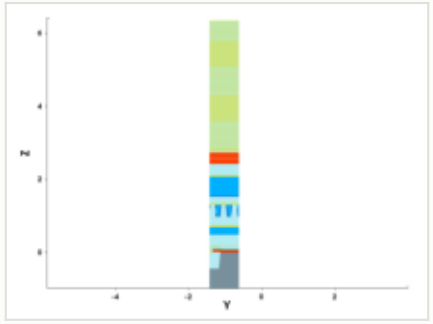

y cut at -1.035 µm

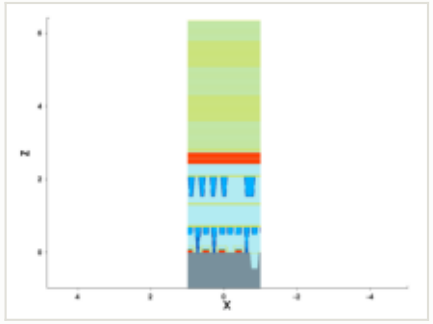

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 177.6 of 1,872.8 (this step +0.328)

MPW materials — 31.6 of 132.5 (this step +0.0159)

GPW gases — 75.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

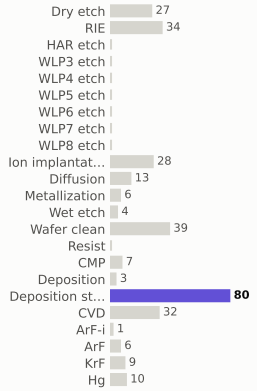

materials deposited (g)

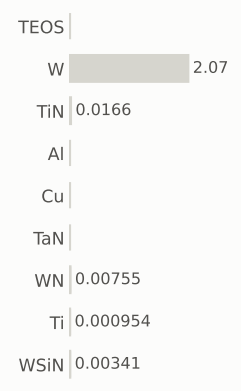

gases emitted (g)

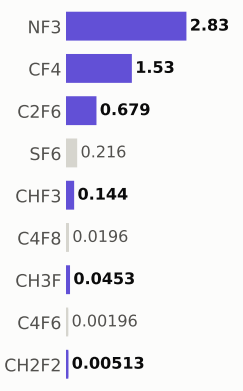

Step #3900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	285.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

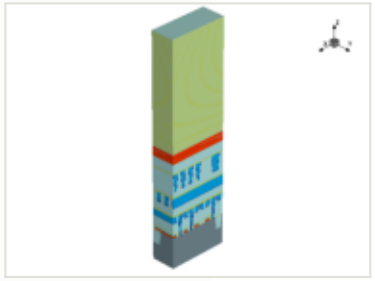

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

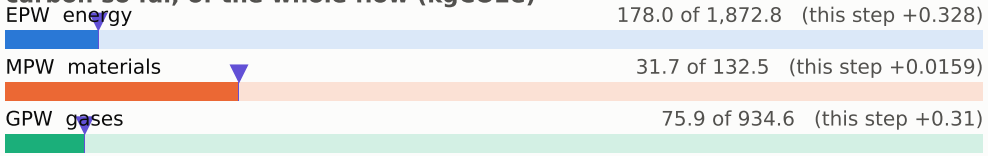

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

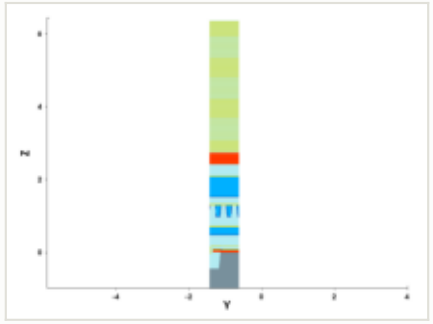

y cut at -1.035 µm

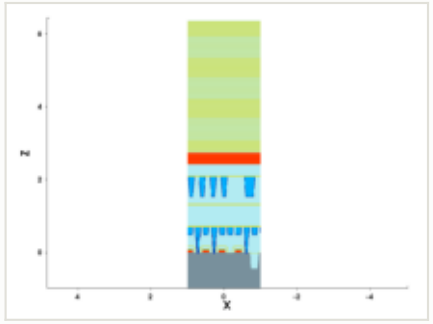

mask for this step

no mask for this step

steps by process area

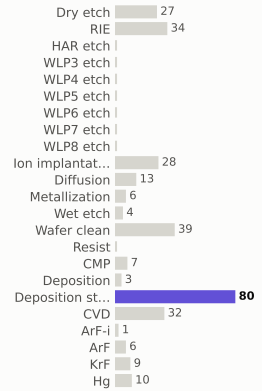

materials deposited (g)

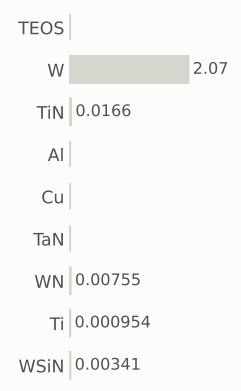

gases emitted (g)

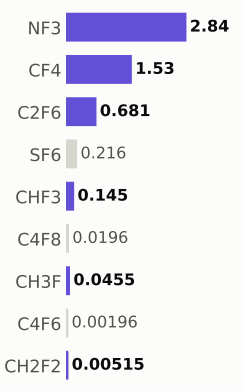

Step #3910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	286.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

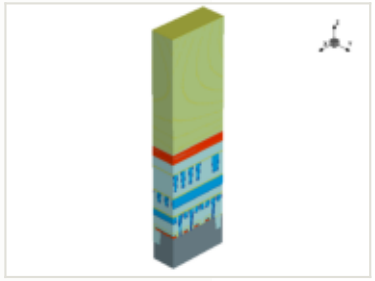

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

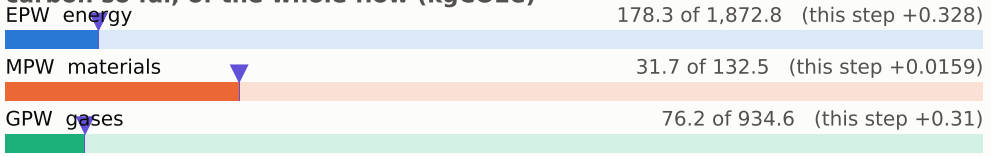

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

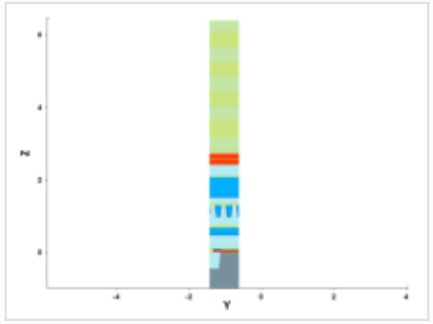

y cut at -1.035 µm

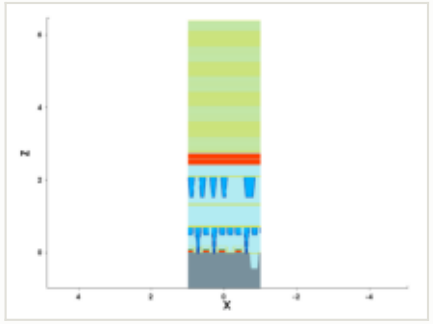

mask for this step

no mask for this step

steps by process area

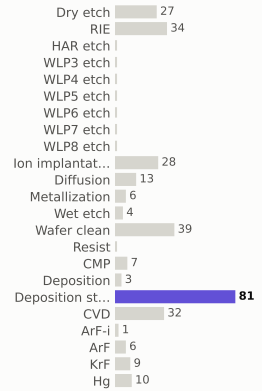

materials deposited (g)

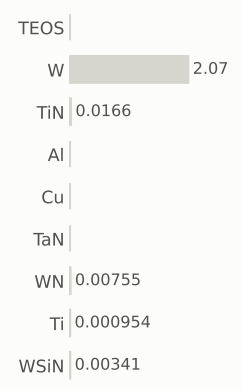

gases emitted (g)

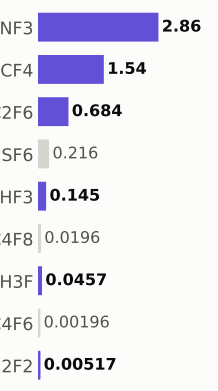

Step #3920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	286.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

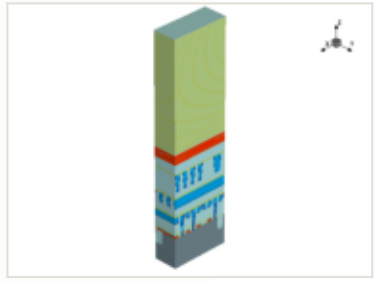

x cut at 0.000 µm

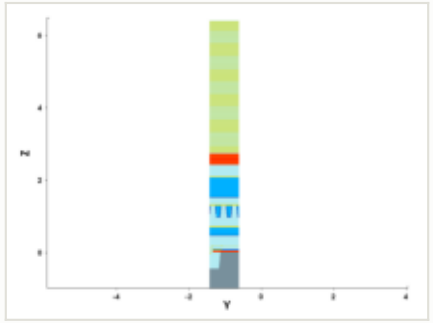

y cut at -1.035 µm

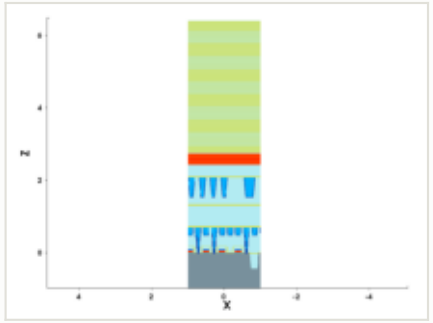

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

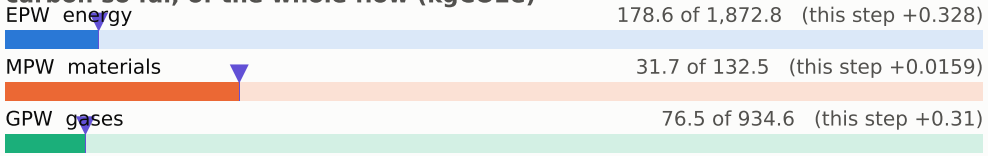

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

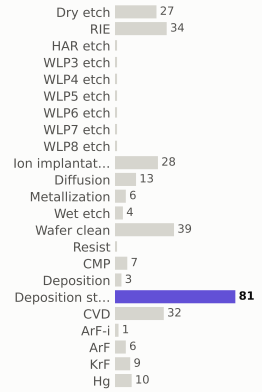

materials deposited (g)

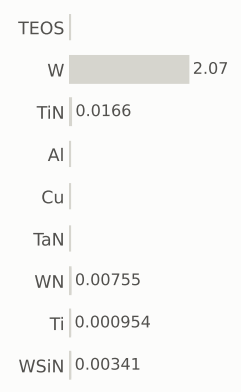

gases emitted (g)

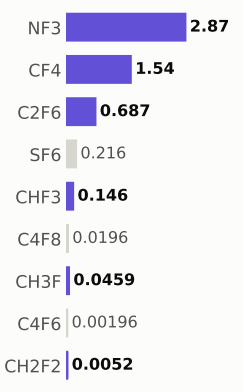

Step #3930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	287.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

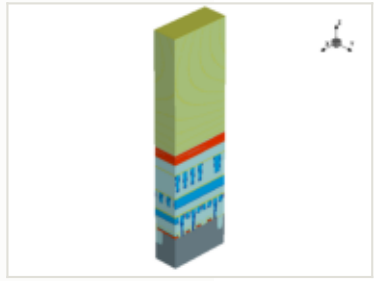

x cut at 0.000 µm

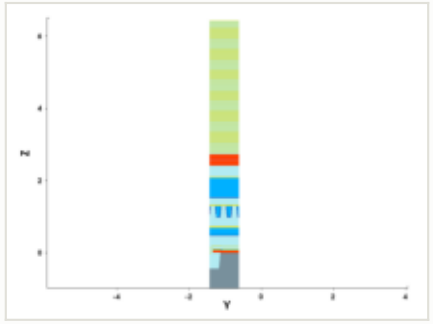

y cut at -1.035 µm

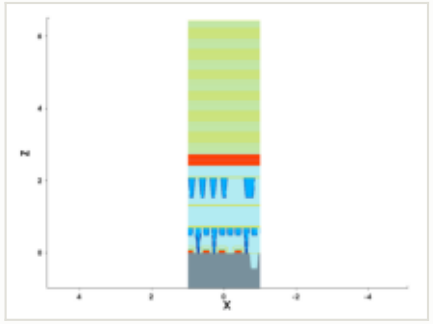

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 178.9 of 1,872.8 (this step +0.328)

MPW materials — 31.7 of 132.5 (this step +0.0159)

GPW gases — 76.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

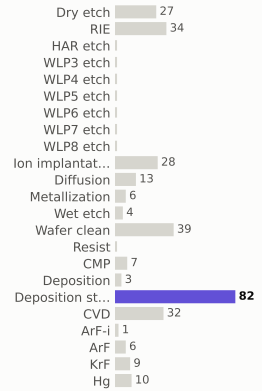

materials deposited (g)

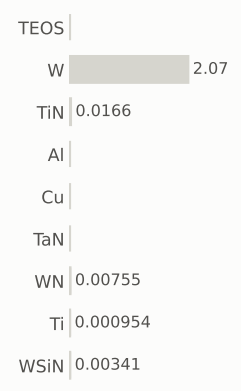

gases emitted (g)

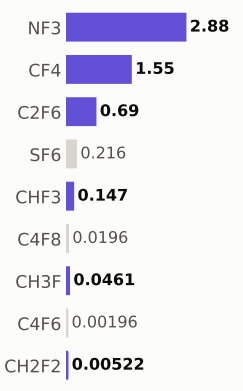

Step #3940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	288.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

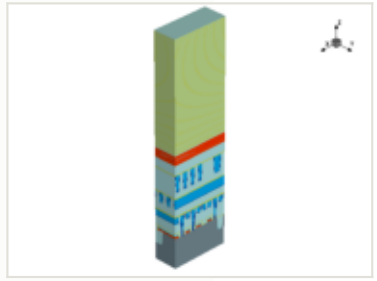

x cut at 0.000 µm

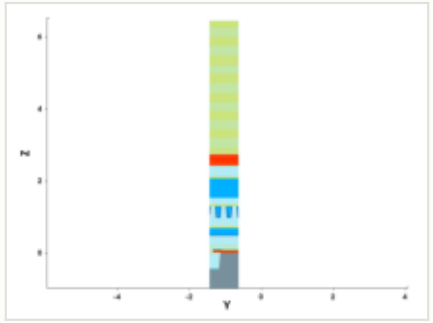

y cut at -1.035 µm

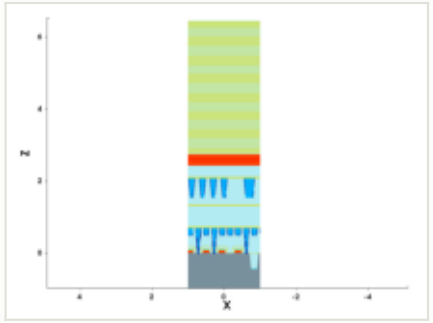

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

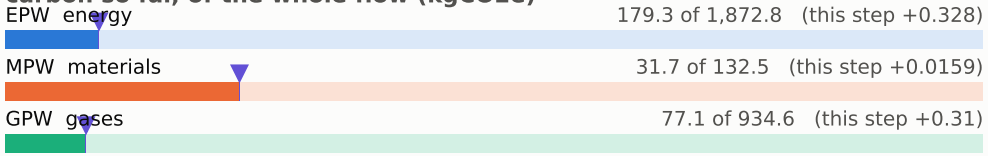

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

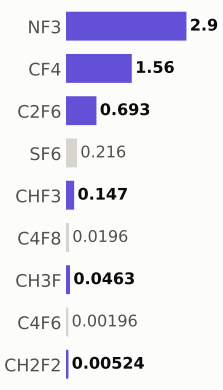

Step #3950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	288.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

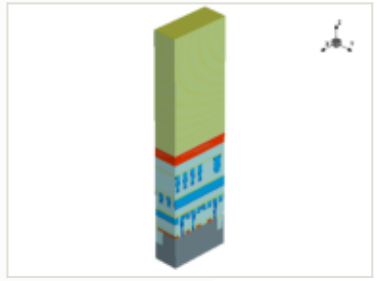

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

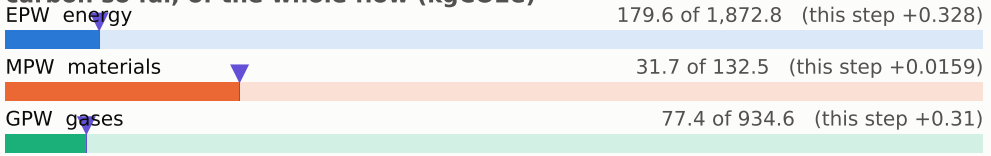

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

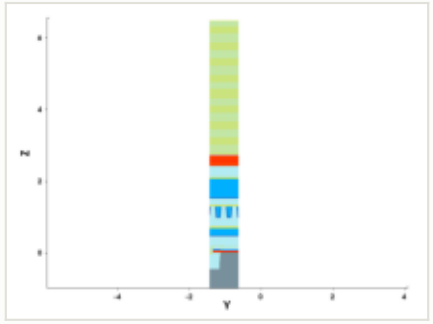

y cut at -1.035 µm

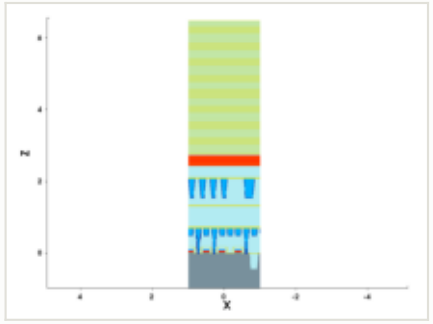

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

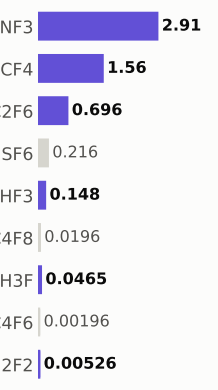

Step #3960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	289.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

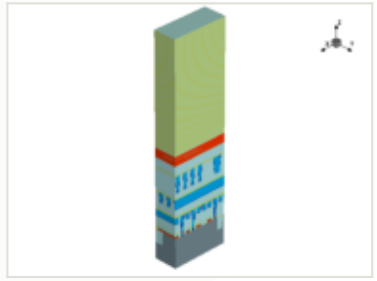

x cut at 0.000 µm

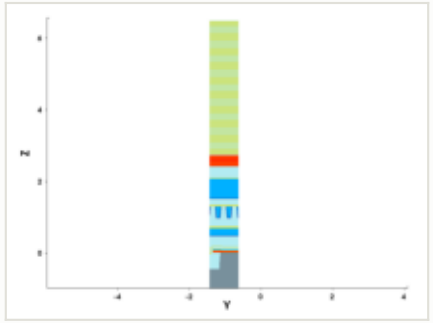

y cut at -1.035 µm

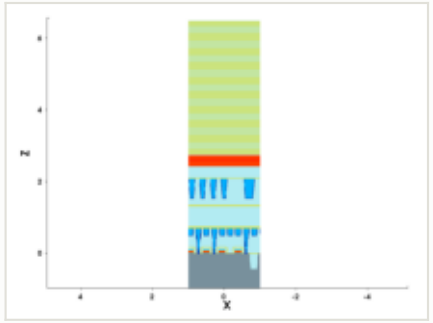

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

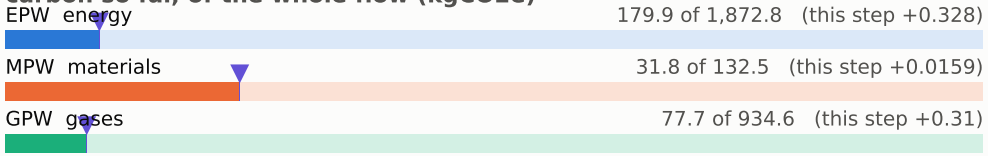

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

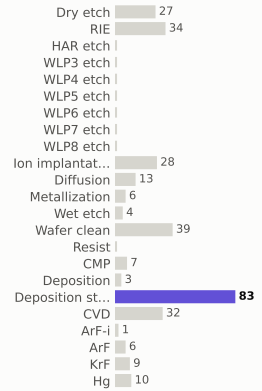

materials deposited (g)

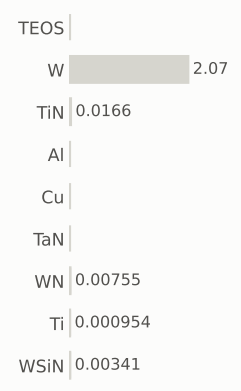

gases emitted (g)

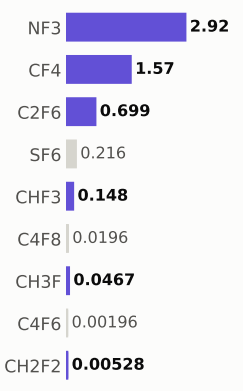

Step #3970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	290.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

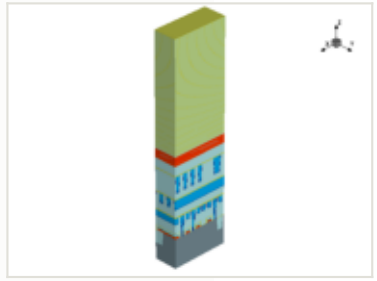

x cut at 0.000 µm

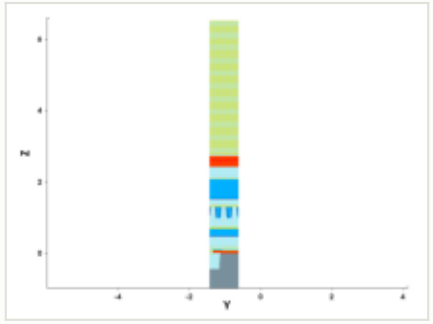

y cut at -1.035 µm

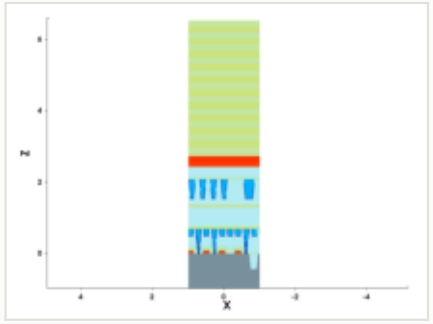

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

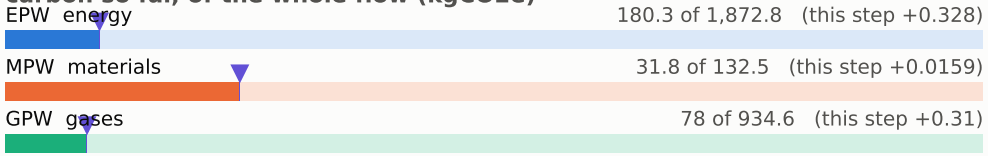

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

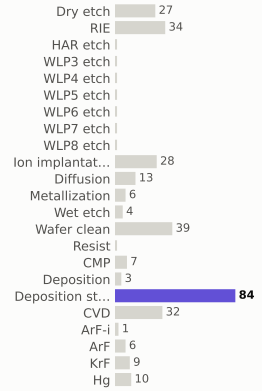

materials deposited (g)

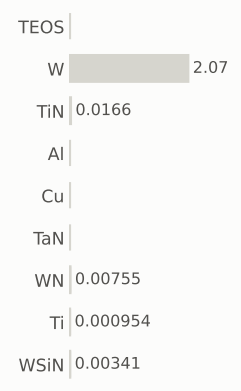

gases emitted (g)

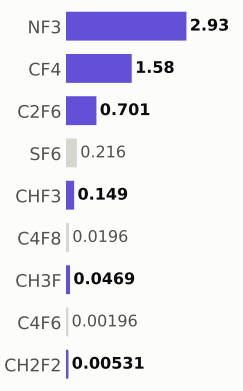

Step #3980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	290.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

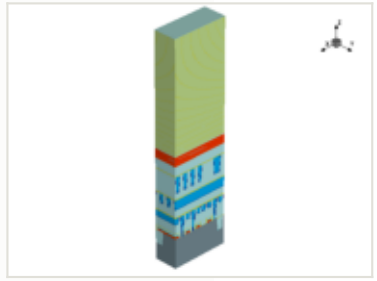

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

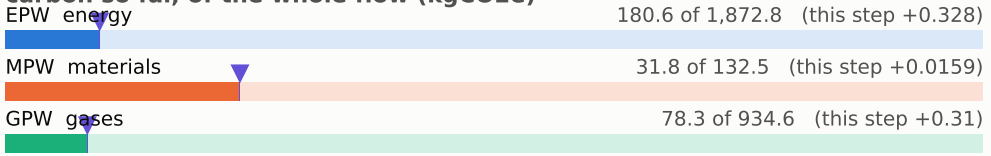

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

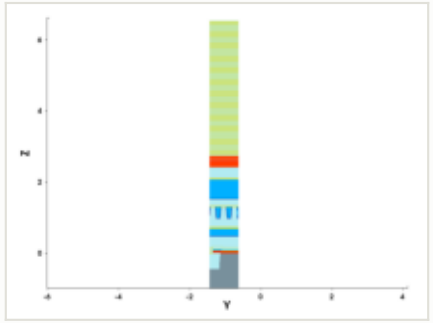

y cut at -1.035 µm

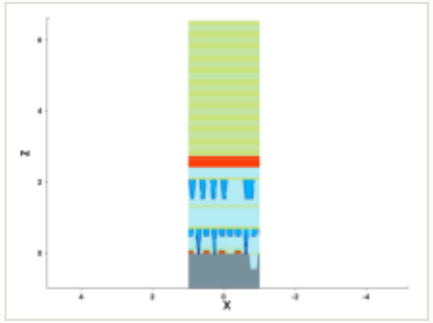

mask for this step

no mask for this step

steps by process area

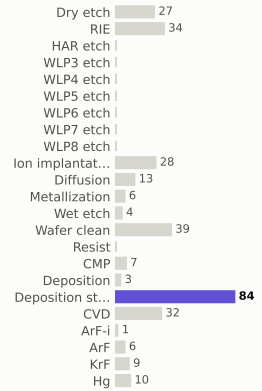

materials deposited (g)

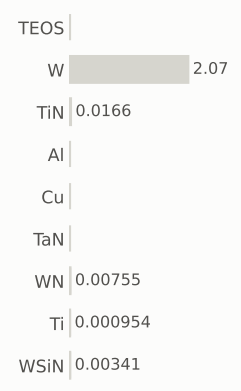

gases emitted (g)

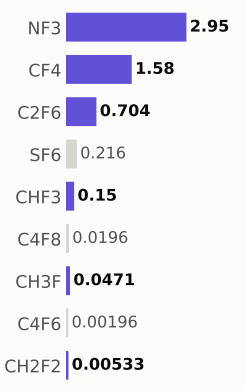

Step #3990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	291.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

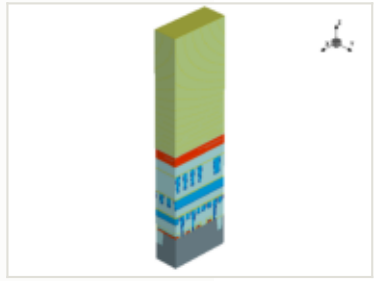

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

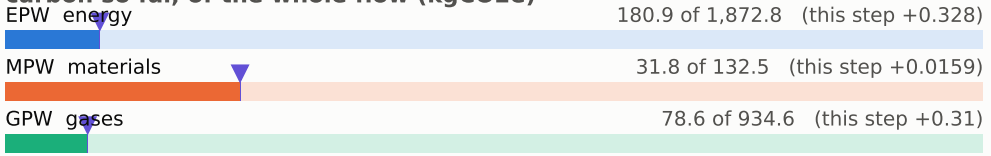

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

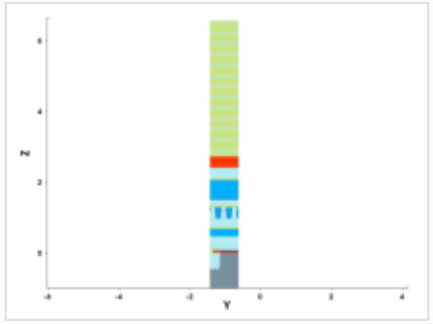

y cut at -1.035 µm

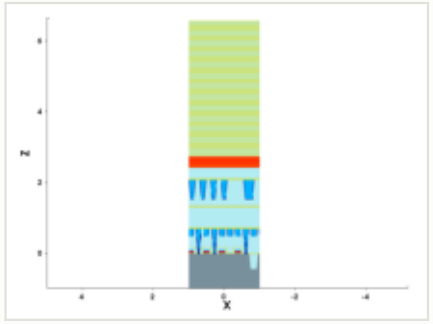

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #4000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	292.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

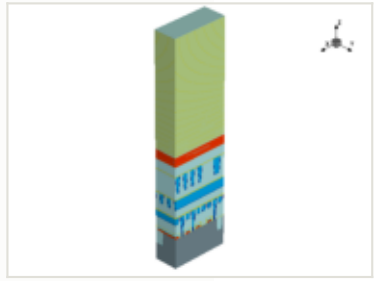

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

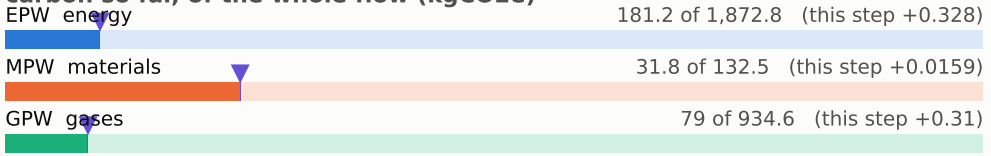

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

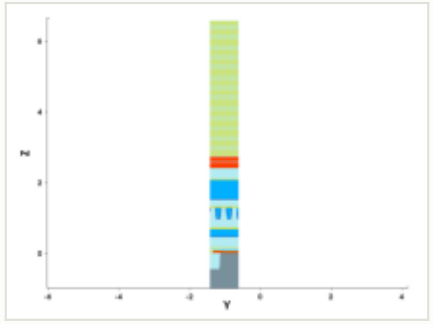

y cut at -1.035 µm

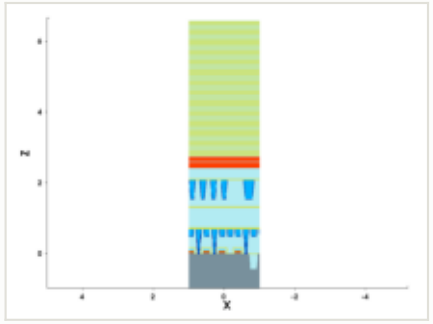

mask for this step

no mask for this step

steps by process area

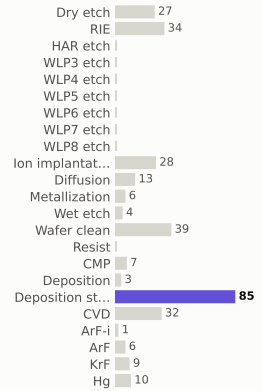

materials deposited (g)

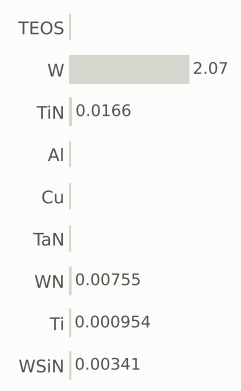

gases emitted (g)

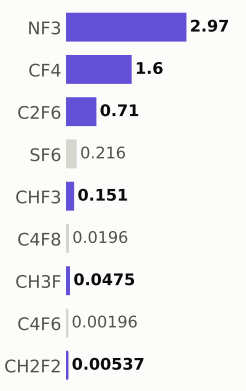

Step #4010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	292.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

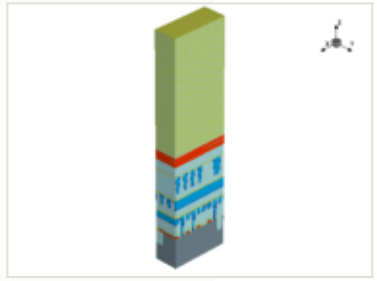

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

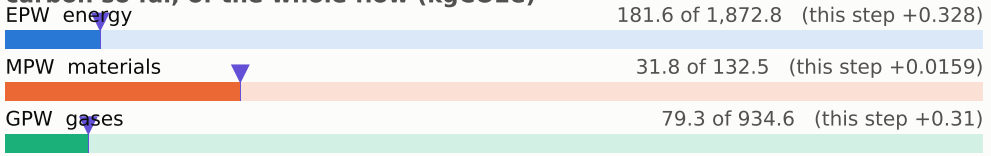

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

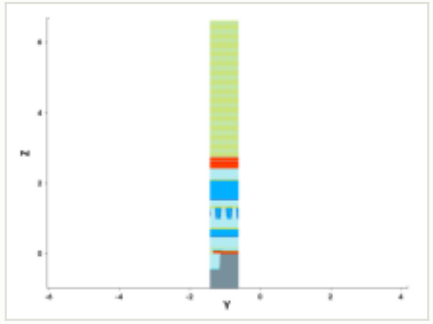

y cut at -1.035 µm

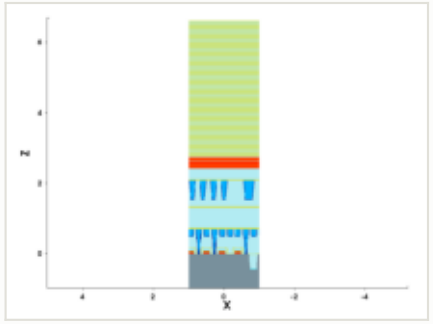

mask for this step

no mask for this step

steps by process area

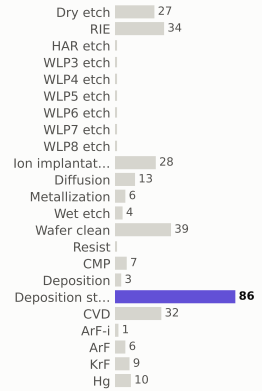

materials deposited (g)

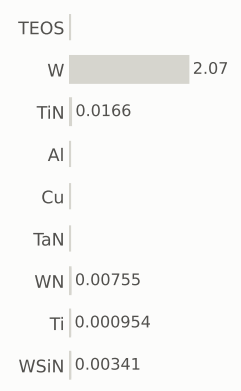

gases emitted (g)

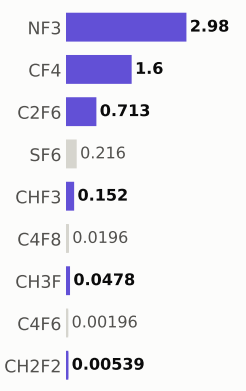

Step #4020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	293.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

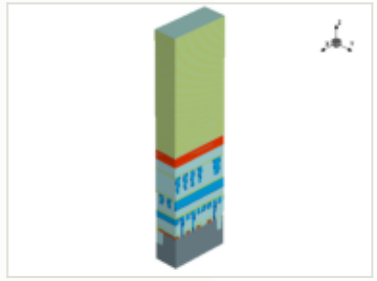

x cut at 0.000 µm

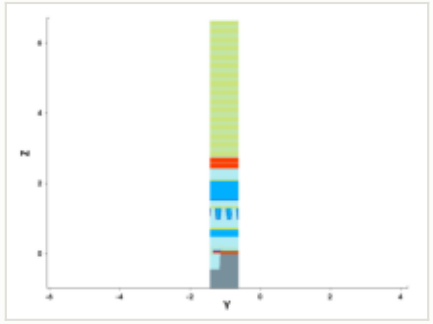

y cut at -1.035 µm

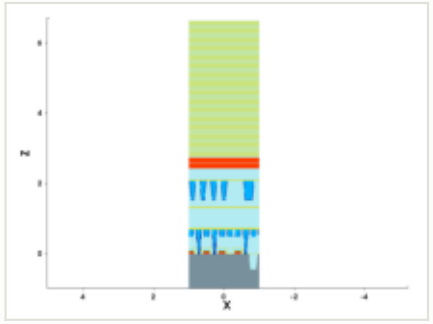

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

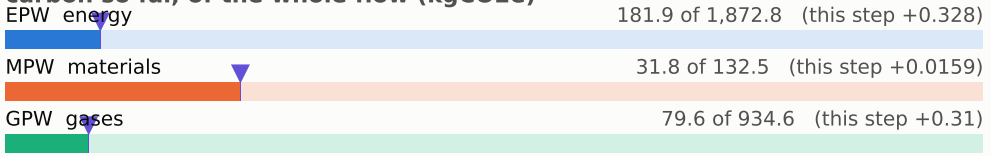

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

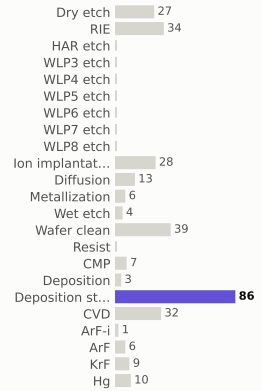

materials deposited (g)

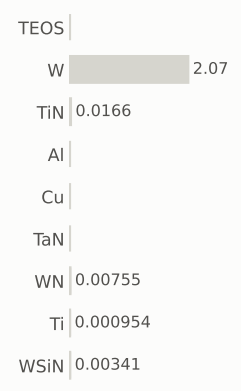

gases emitted (g)

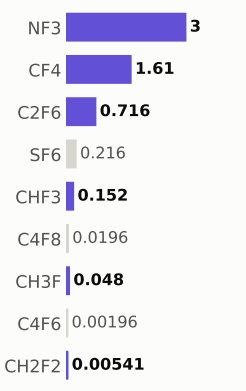

Step #4030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	294.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

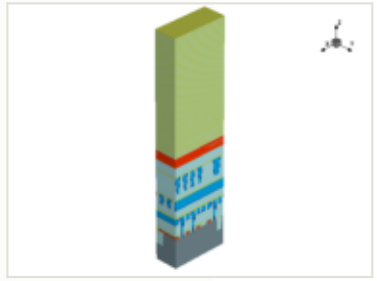

x cut at 0.000 µm

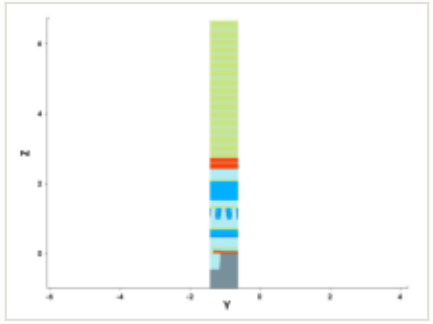

y cut at -1.035 µm

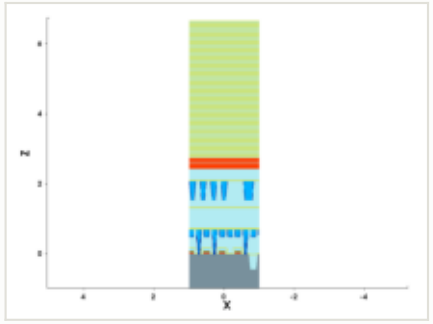

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

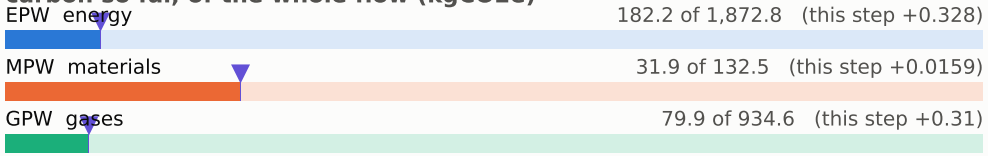

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

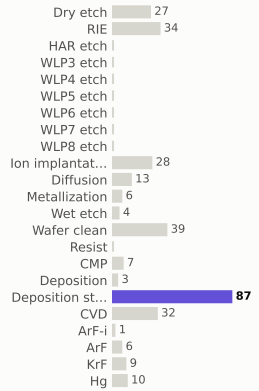

materials deposited (g)

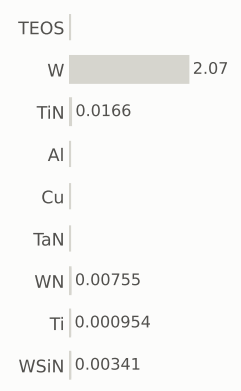

gases emitted (g)

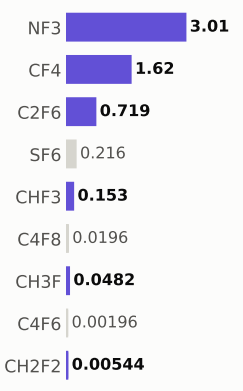

Step #4040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	294.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

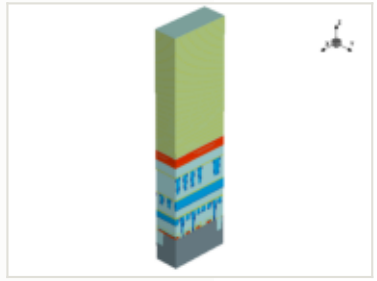

x cut at 0.000 µm

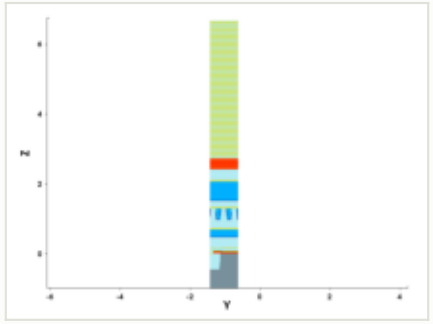

y cut at -1.035 µm

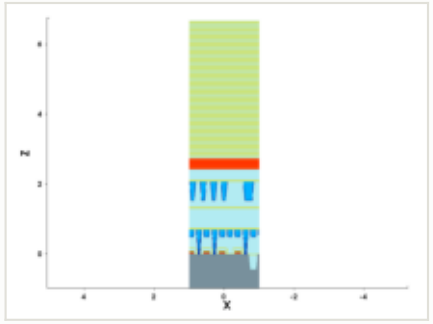

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

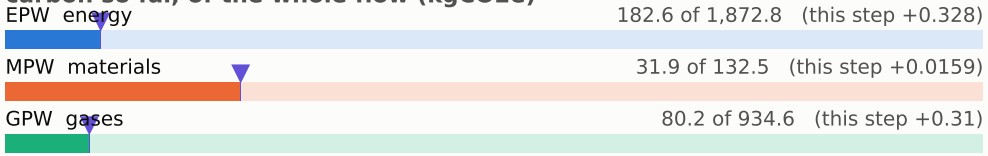

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

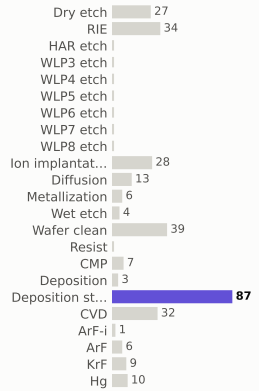

materials deposited (g)

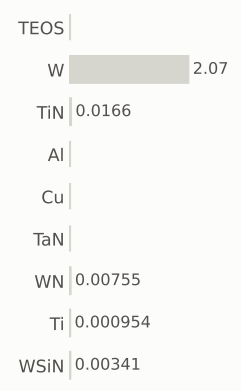

gases emitted (g)

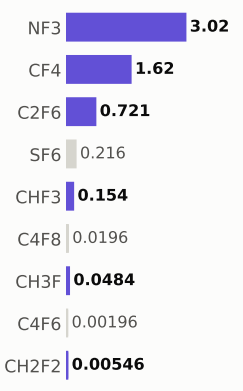

Step #4050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	295.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

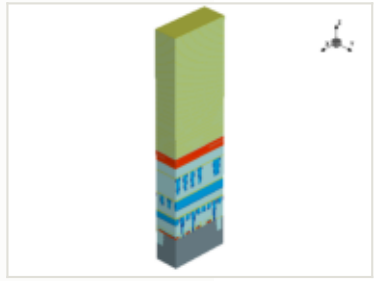

x cut at 0.000 µm

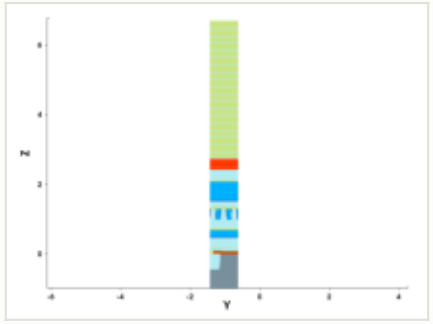

y cut at -1.035 µm

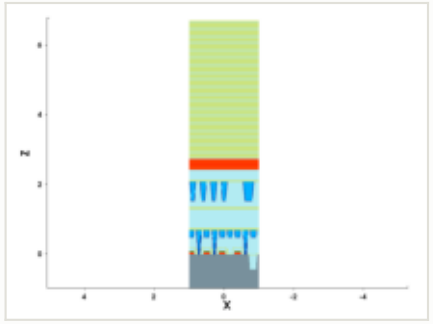

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

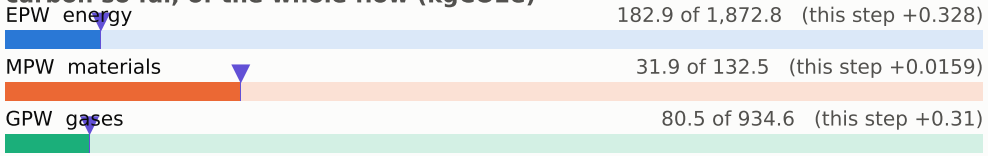

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

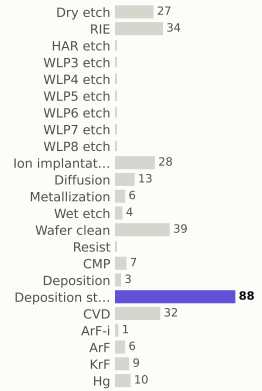

materials deposited (g)

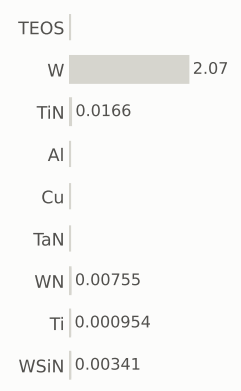

gases emitted (g)

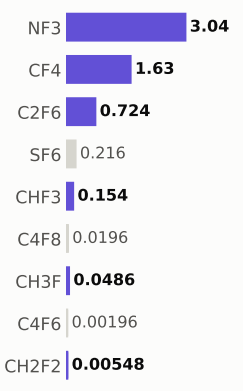

Step #4060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	295.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

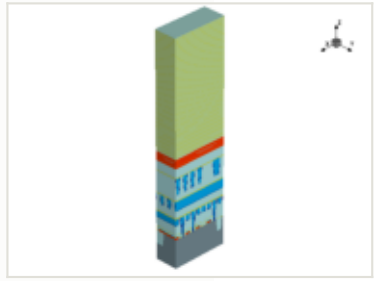

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

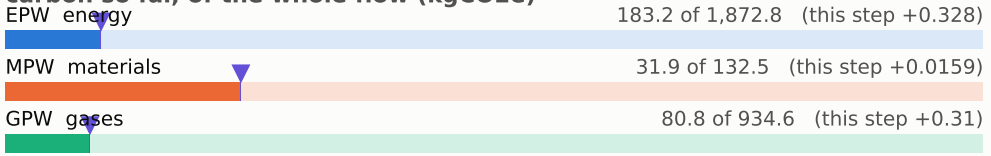

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

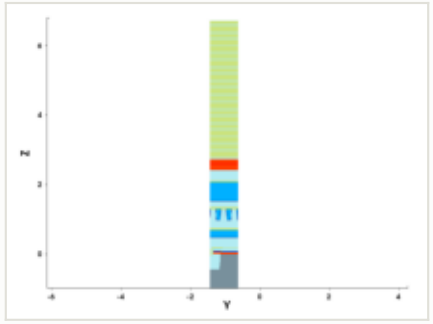

y cut at -1.035 µm

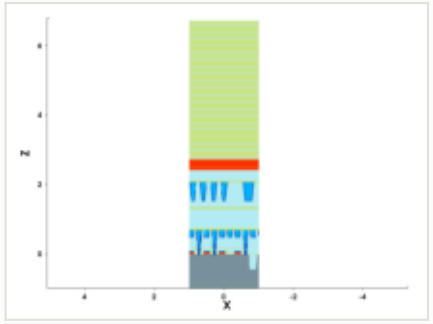

mask for this step

no mask for this step

steps by process area

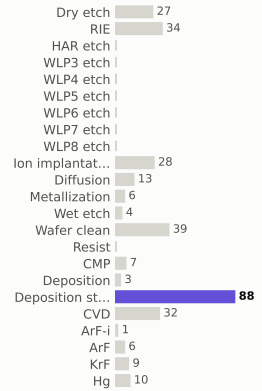

materials deposited (g)

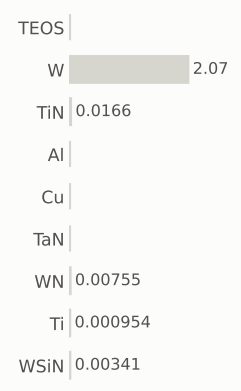

gases emitted (g)

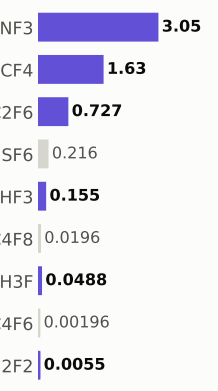

Step #4070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	296.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

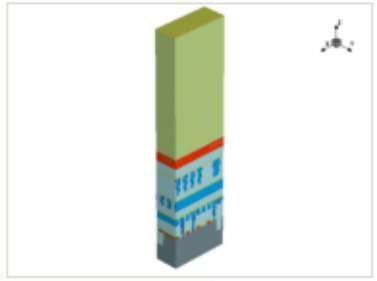

x cut at 0.000 µm

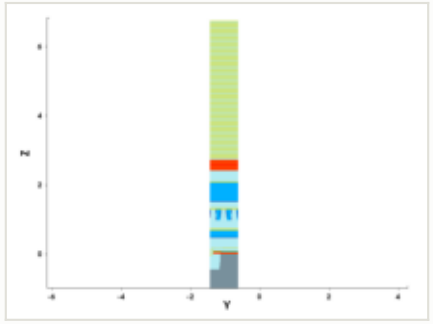

y cut at -1.035 µm

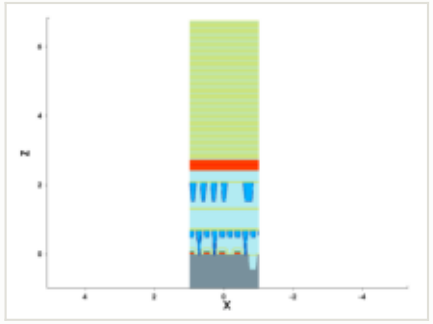

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

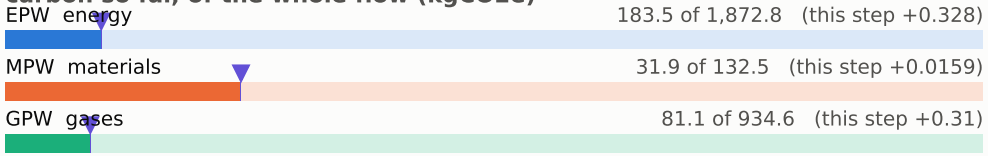

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

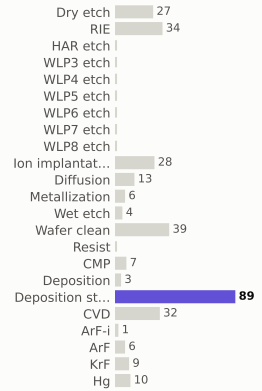

materials deposited (g)

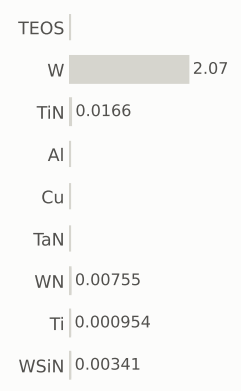

gases emitted (g)

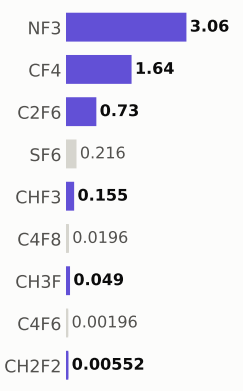

Step #4080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	297.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

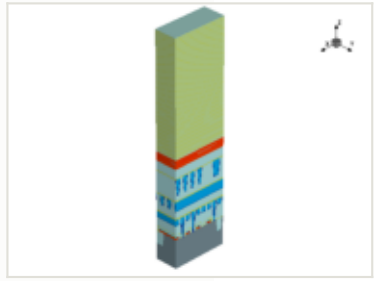

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

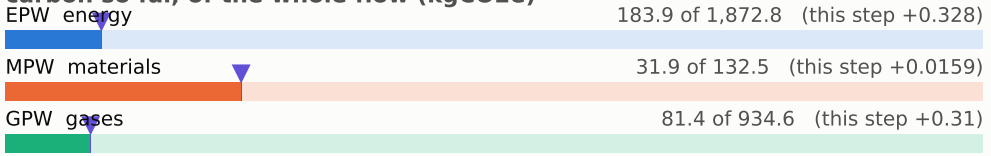

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

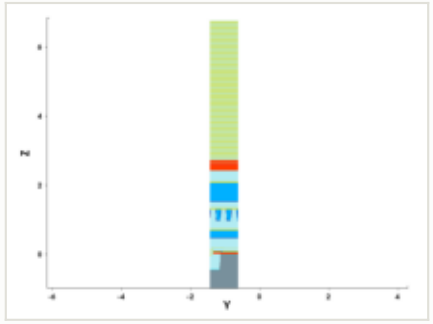

y cut at -1.035 µm

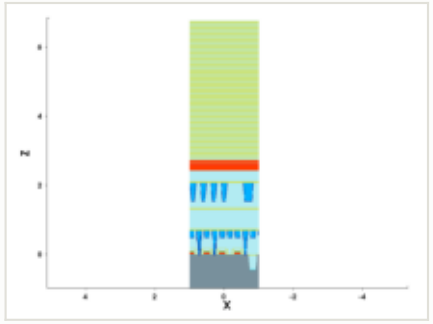

mask for this step

no mask for this step

steps by process area

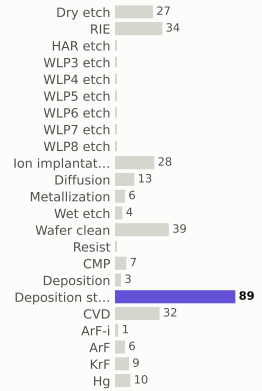

materials deposited (g)

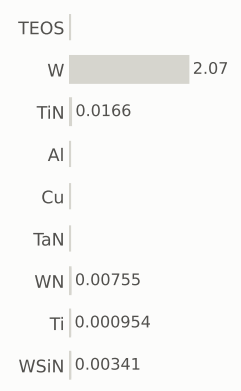

gases emitted (g)

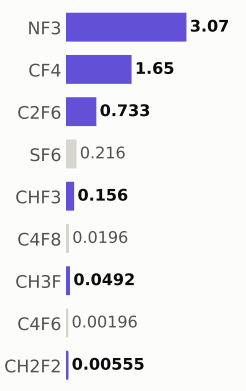

Step #4090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	297.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

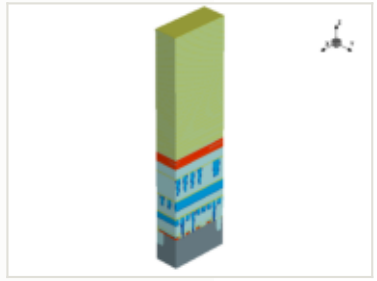

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

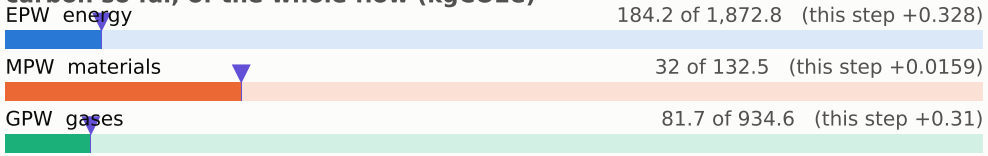

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

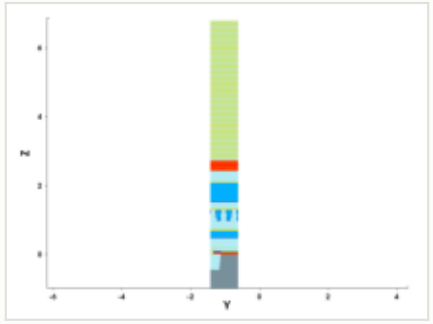

y cut at -1.035 µm

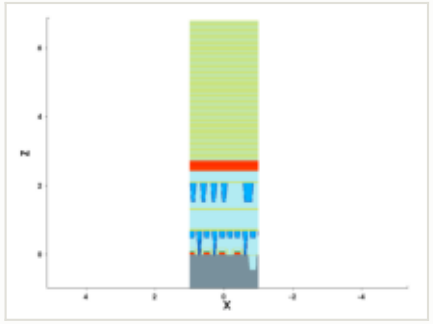

mask for this step

no mask for this step

steps by process area

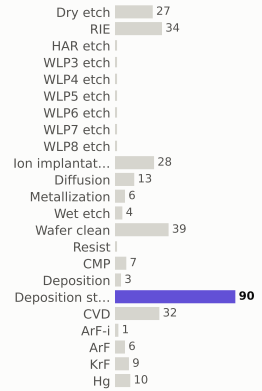

materials deposited (g)

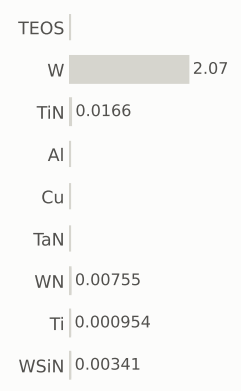

gases emitted (g)

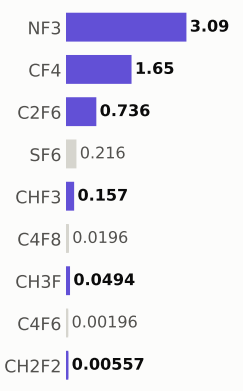

Step #4100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	298.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

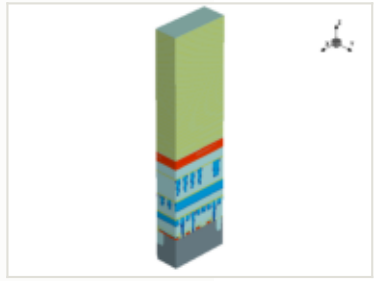

x cut at 0.000 µm

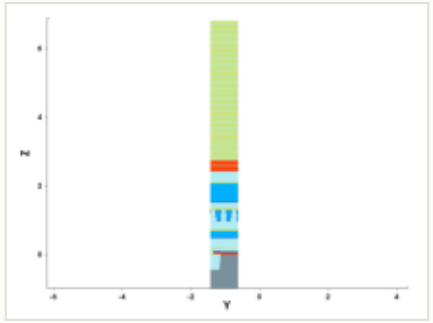

y cut at -1.035 µm

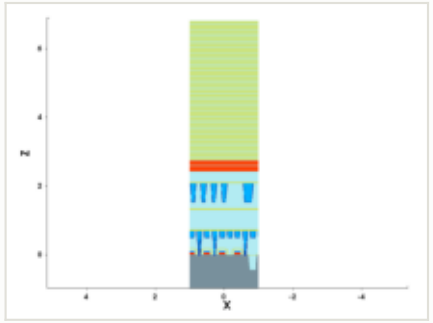

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

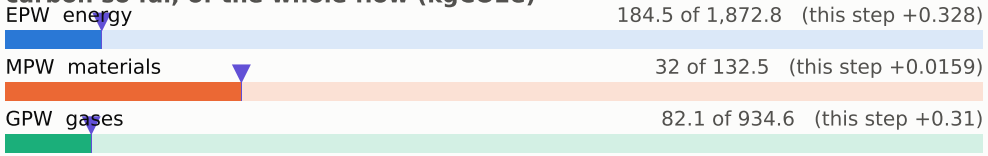

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

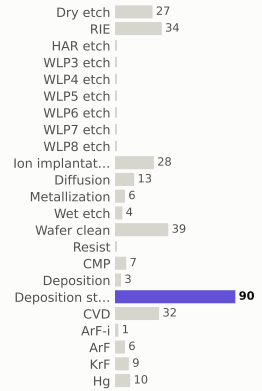

materials deposited (g)

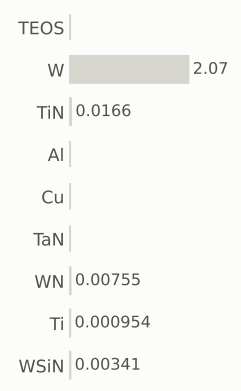

gases emitted (g)

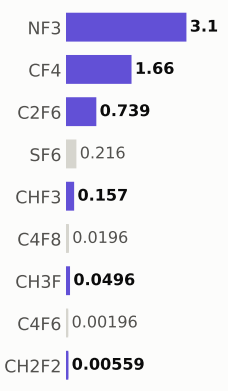

Step #4110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	299.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

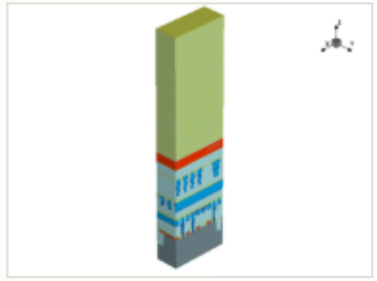

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

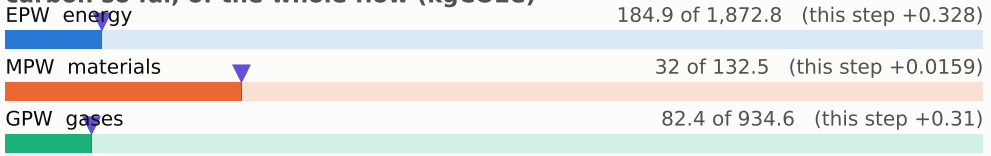

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

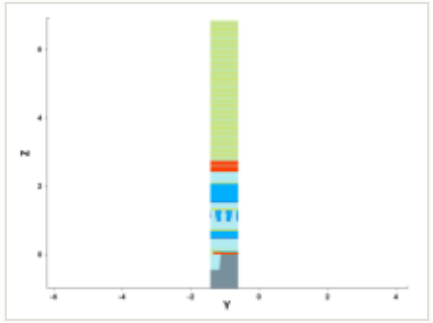

y cut at -1.035 µm

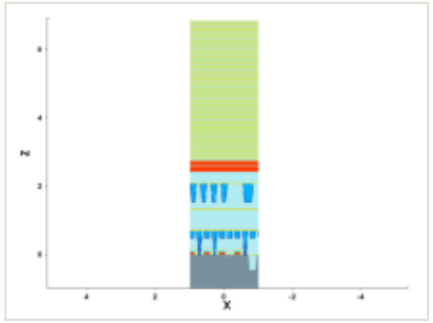

mask for this step

no mask for this step

steps by process area

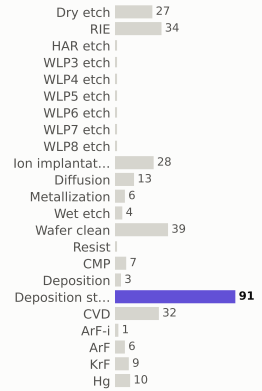

materials deposited (g)

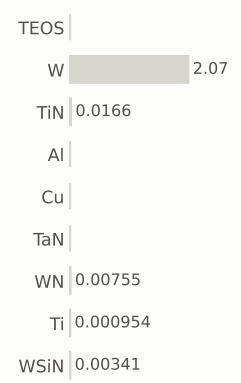

gases emitted (g)

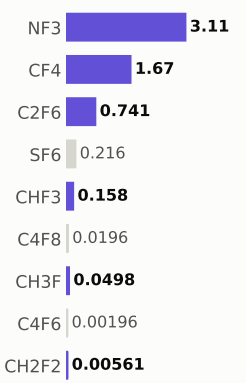

Step #4120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	299.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

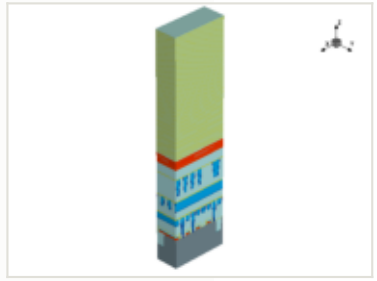

x cut at 0.000 µm

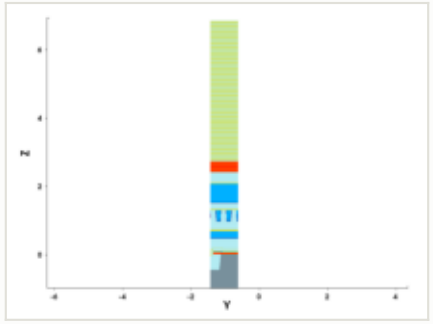

y cut at -1.035 µm

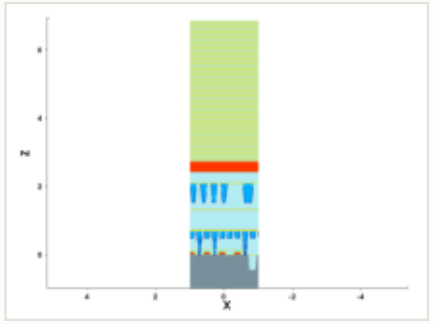

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

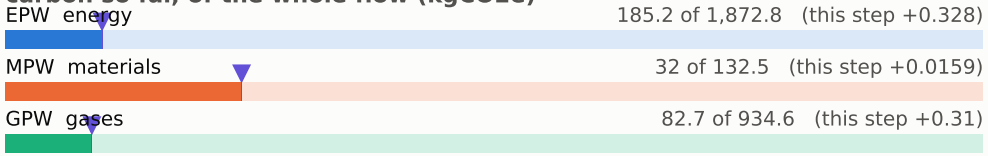

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

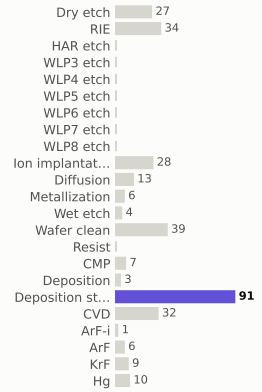

materials deposited (g)

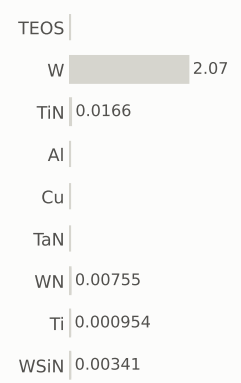

gases emitted (g)

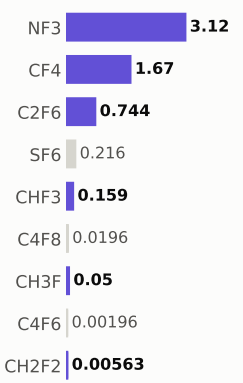

Step #4130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	300.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

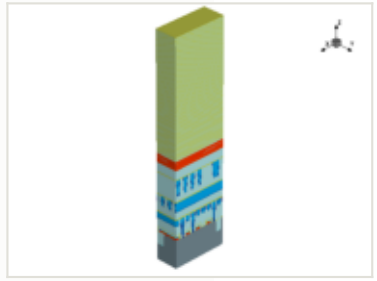

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

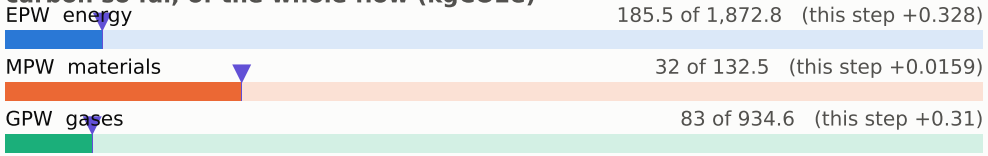

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

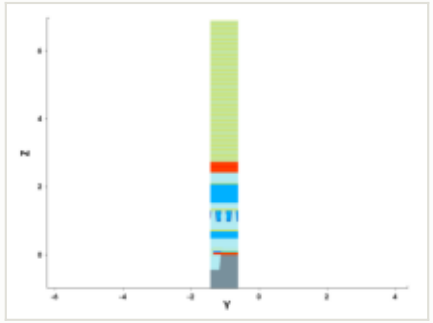

y cut at -1.035 µm

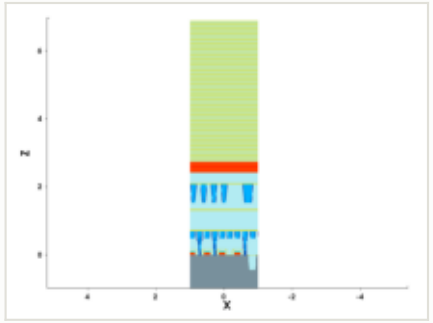

mask for this step

no mask for this step

steps by process area

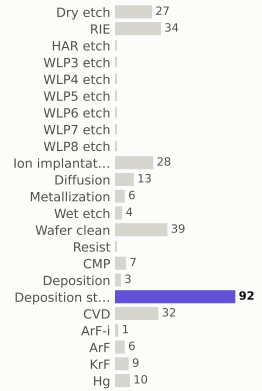

materials deposited (g)

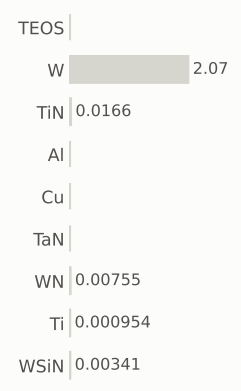

gases emitted (g)

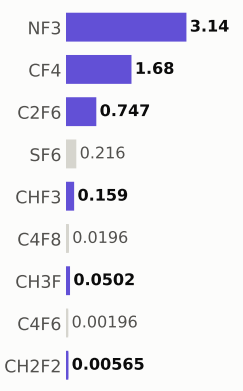

Step #4140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	301.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

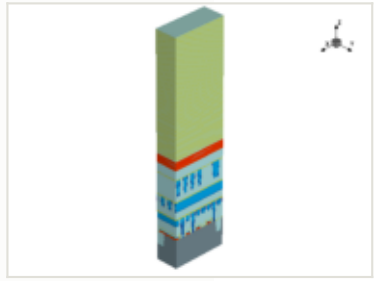

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

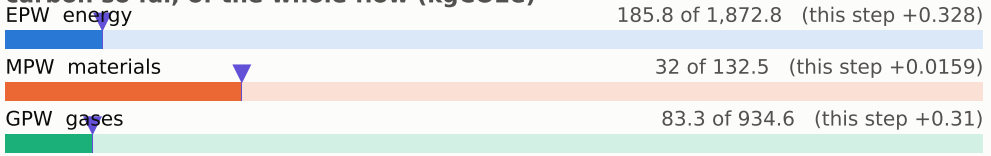

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

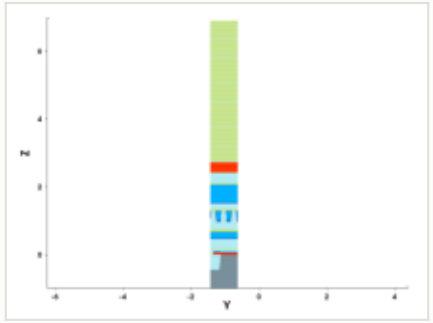

y cut at -1.035 µm

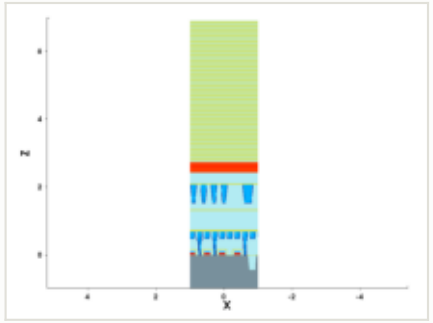

mask for this step

no mask for this step

steps by process area

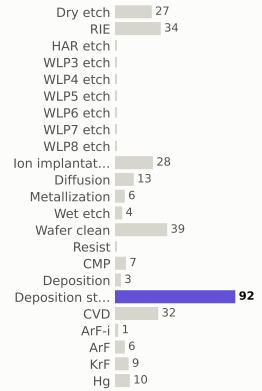

materials deposited (g)

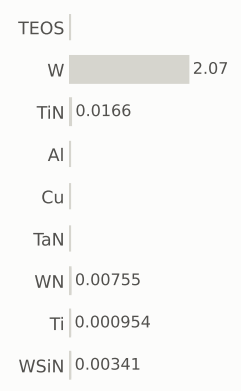

gases emitted (g)

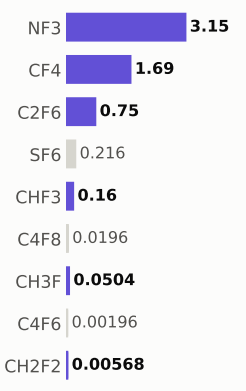

Step #4150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	301.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

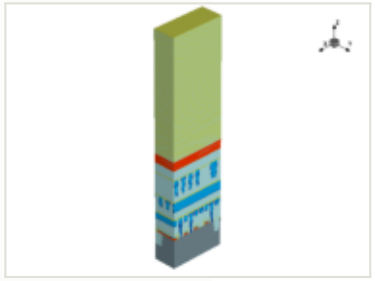

x cut at 0.000 µm

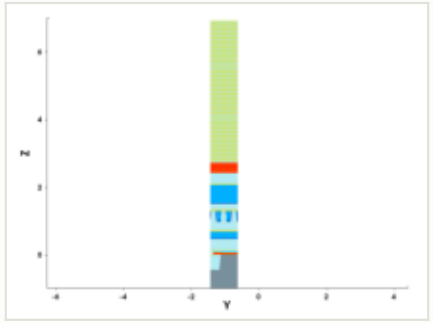

y cut at -1.035 µm

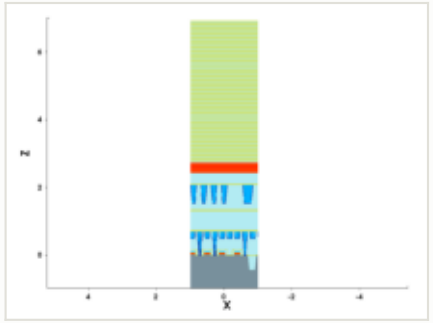

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

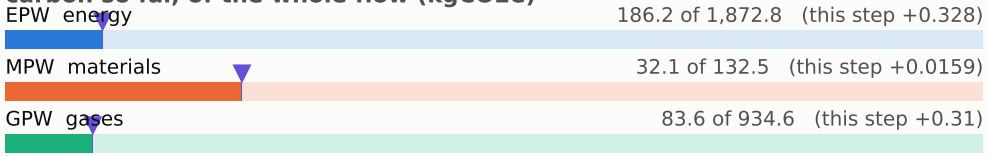

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

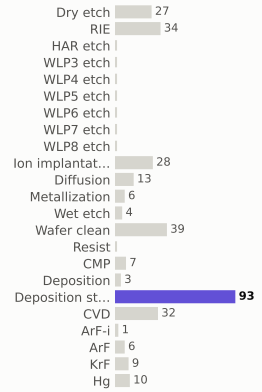

materials deposited (g)

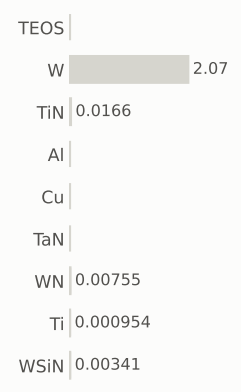

gases emitted (g)

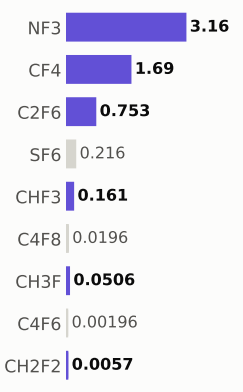

Step #4160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	302.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

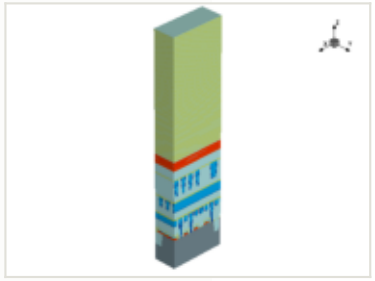

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

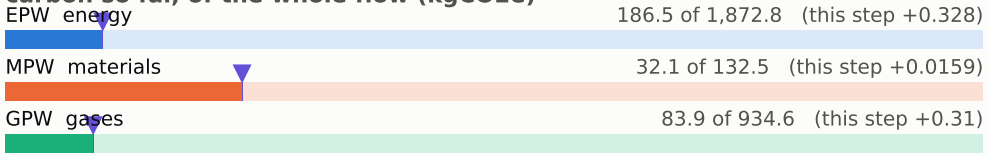

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

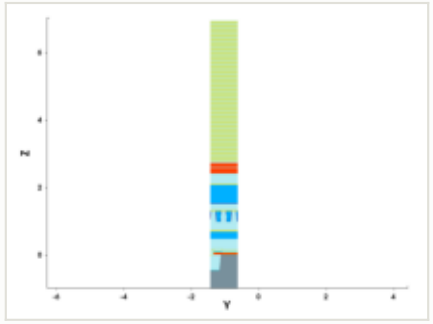

y cut at -1.035 µm

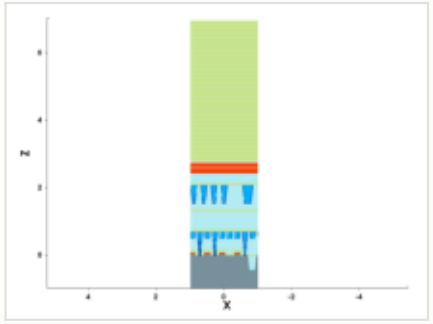

mask for this step

no mask for this step

steps by process area

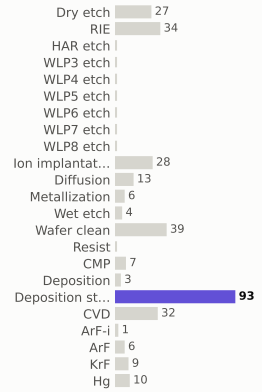

materials deposited (g)

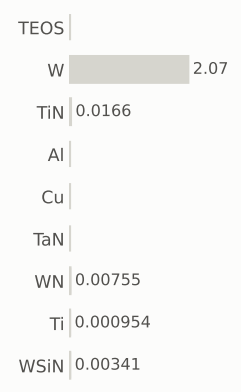

gases emitted (g)

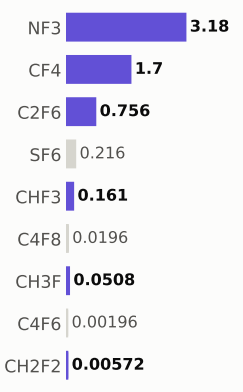

Step #4170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	303.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

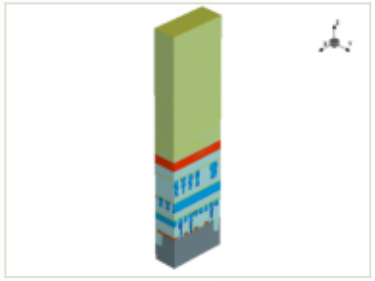

x cut at 0.000 µm

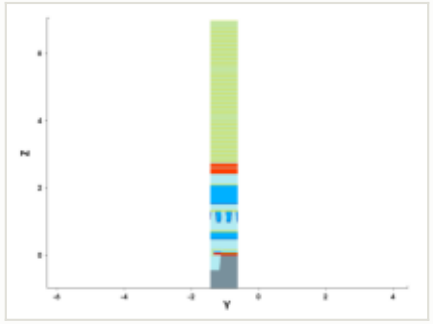

y cut at -1.035 µm

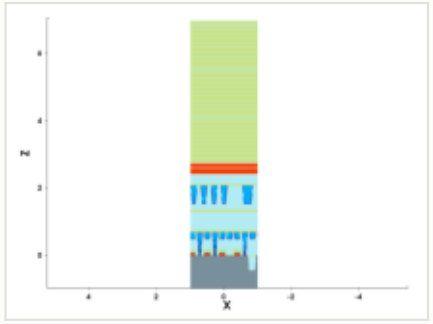

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

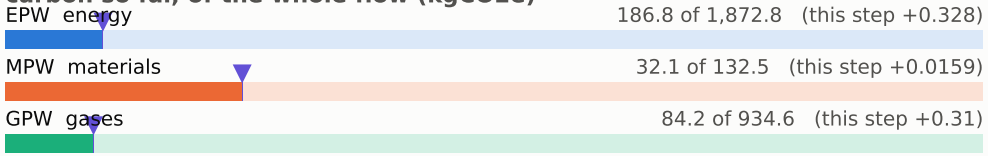

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

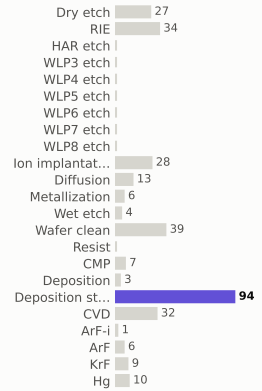

materials deposited (g)

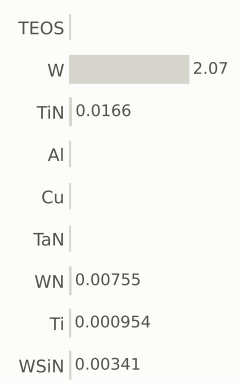

gases emitted (g)

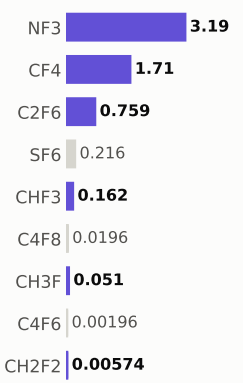

Step #4180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	303.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

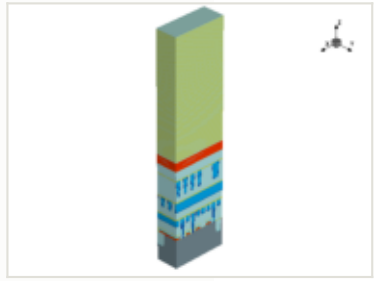

x cut at 0.000 µm

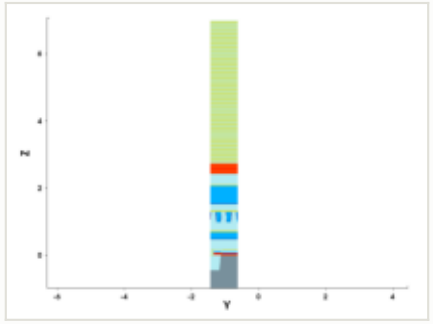

y cut at -1.035 µm

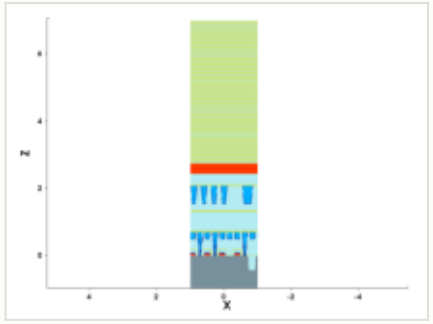

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

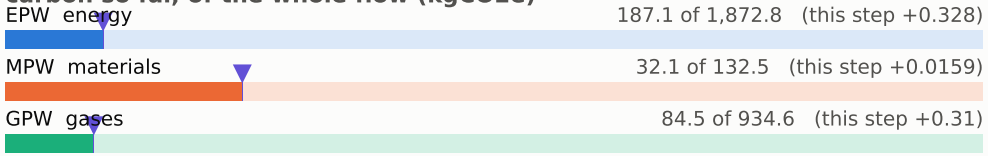

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

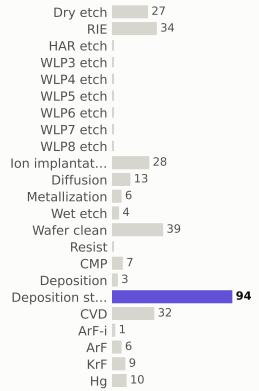

materials deposited (g)

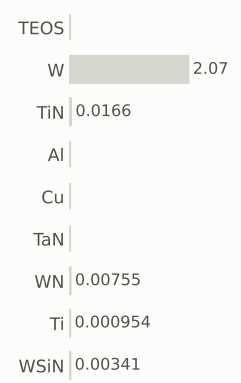

gases emitted (g)

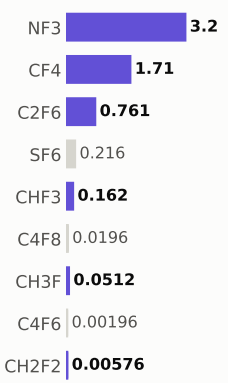

Step #4190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	304.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

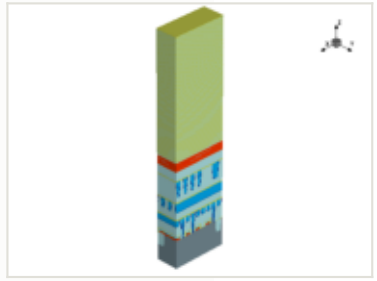

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

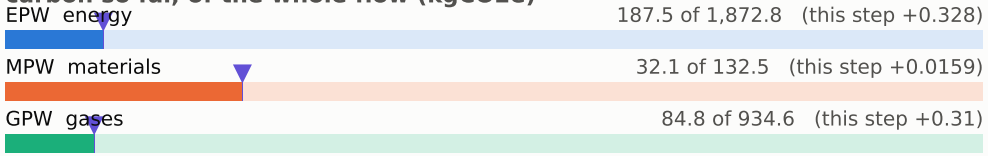

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

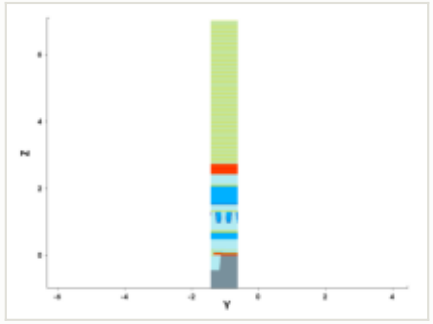

y cut at -1.035 µm

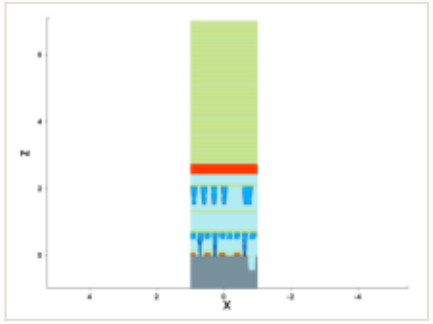

mask for this step

no mask for this step

steps by process area

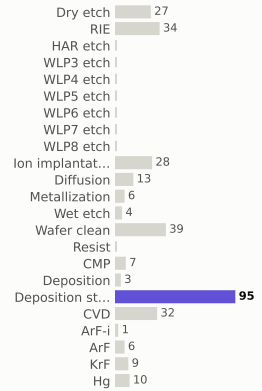

materials deposited (g)

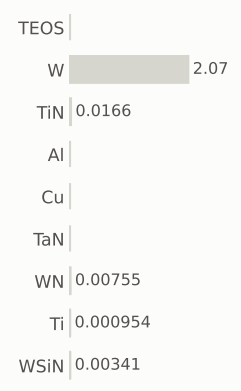

gases emitted (g)

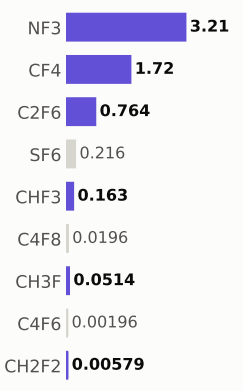

Step #4200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	305.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

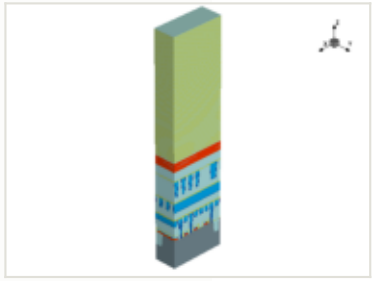

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

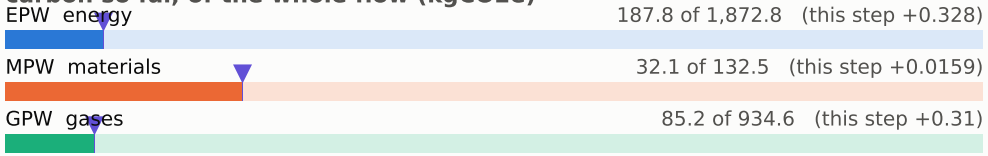

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

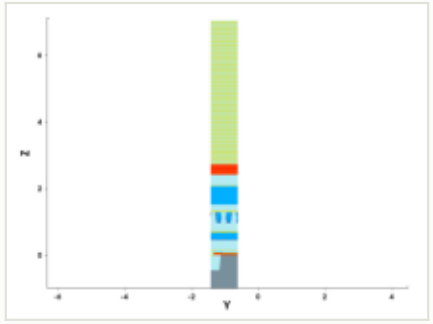

y cut at -1.035 µm

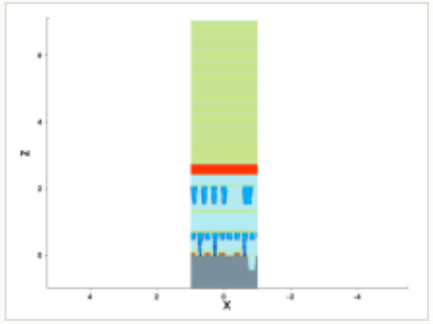

mask for this step

no mask for this step

steps by process area

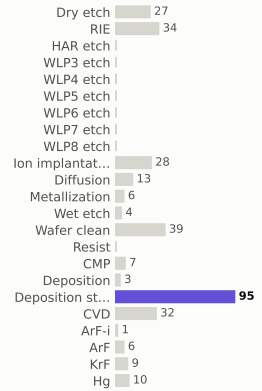

materials deposited (g)

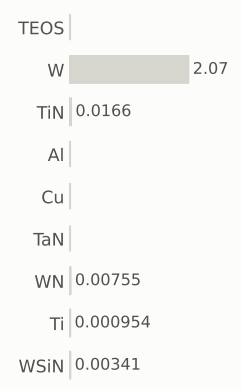

gases emitted (g)

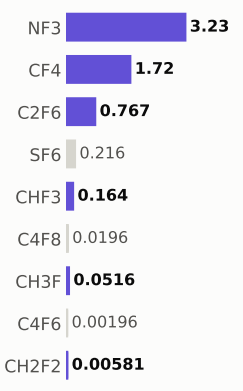

Step #4210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	305.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

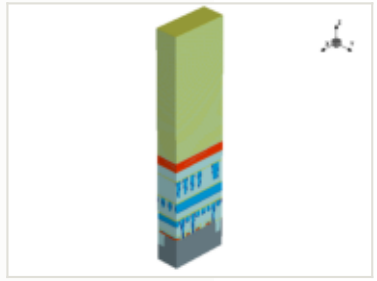

x cut at 0.000 µm

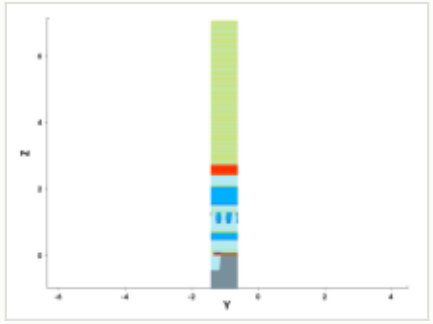

y cut at -1.035 µm

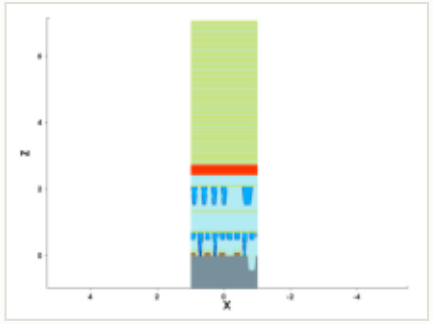

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

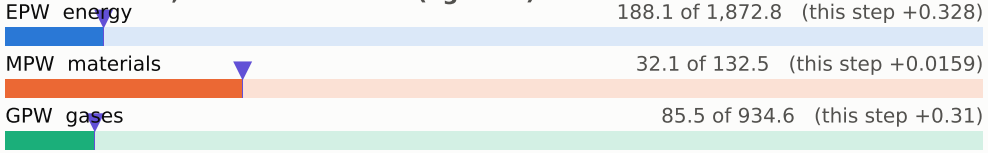

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

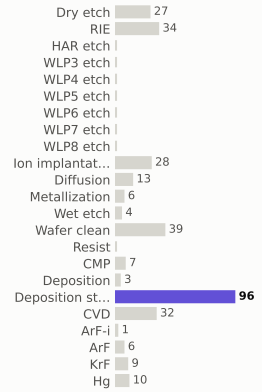

materials deposited (g)

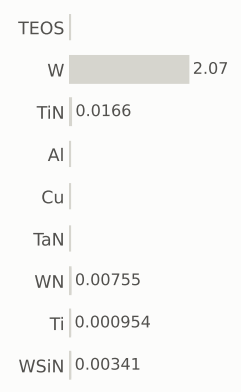

gases emitted (g)

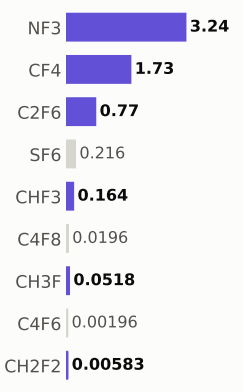

Step #4220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	306.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

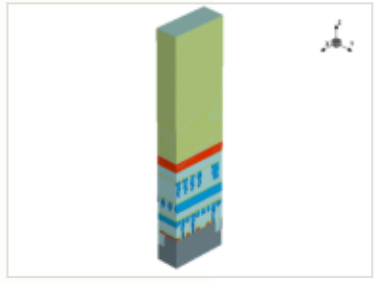

x cut at 0.000 µm

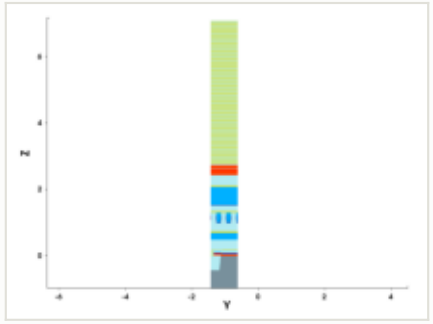

y cut at -1.035 µm

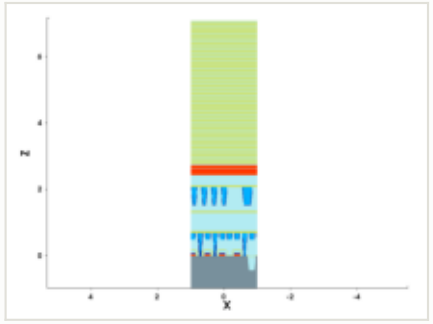

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

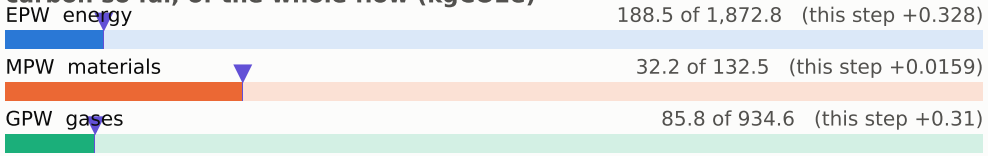

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

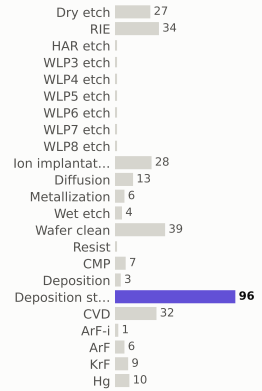

materials deposited (g)

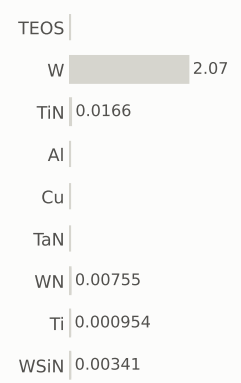

gases emitted (g)

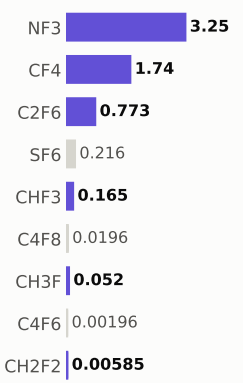

Step #4230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	307.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

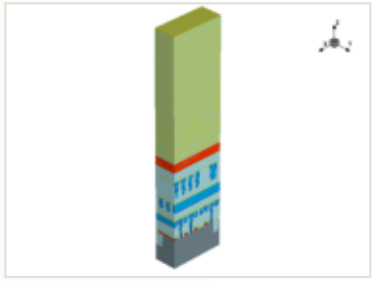

x cut at 0.000 µm

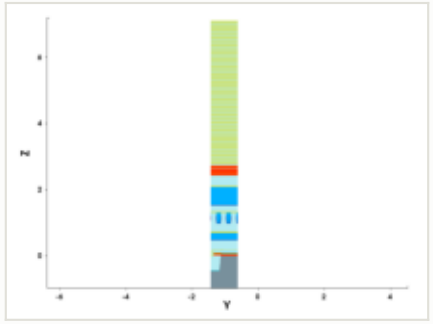

y cut at -1.035 µm

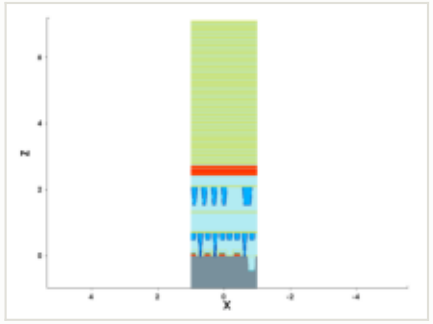

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

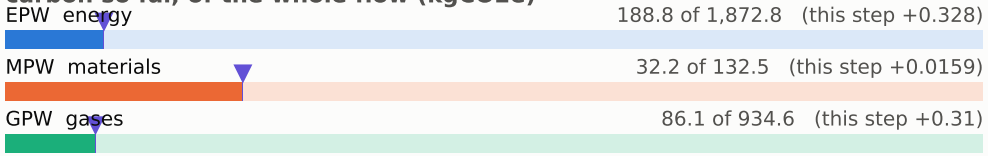

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

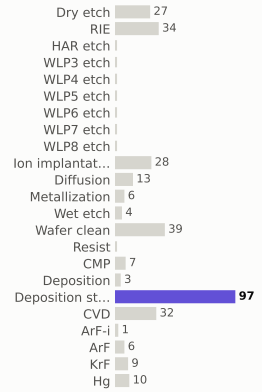

materials deposited (g)

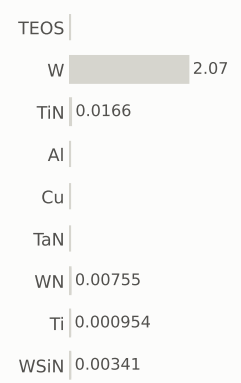

gases emitted (g)

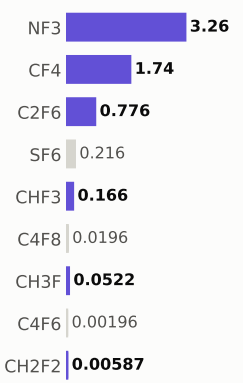

Step #4240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	307.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

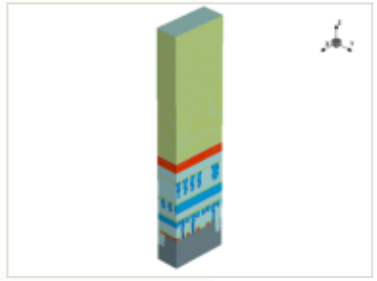

x cut at 0.000 µm

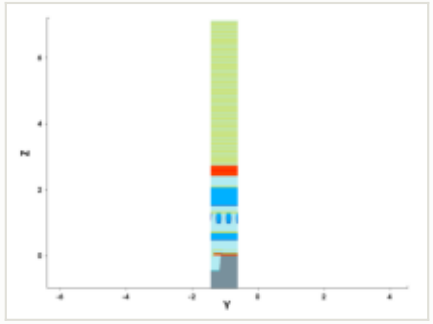

y cut at -1.035 µm

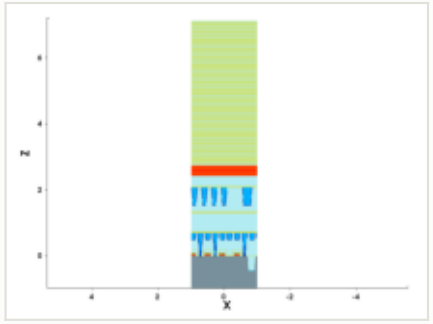

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

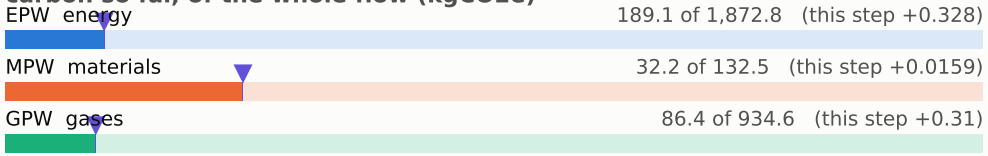

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

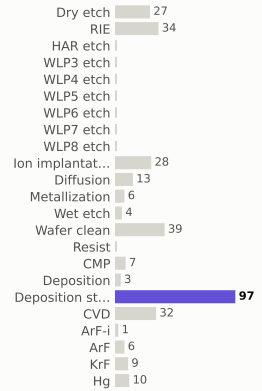

materials deposited (g)

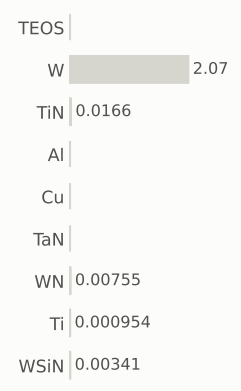

gases emitted (g)

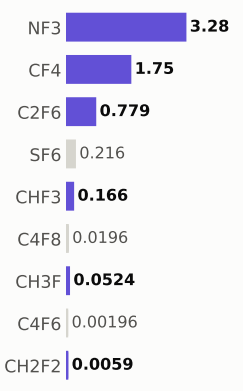

Step #4250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	308.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

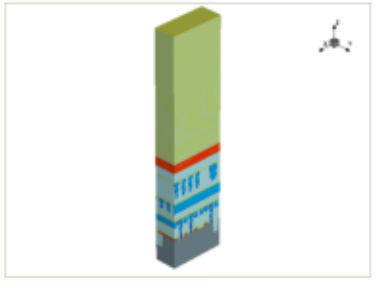

x cut at 0.000 µm

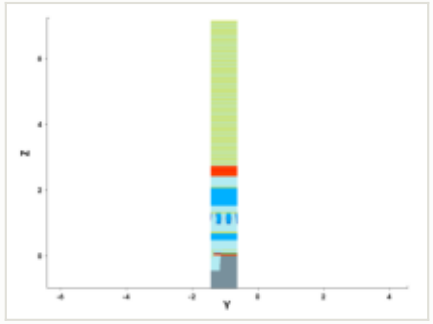

y cut at -1.035 µm

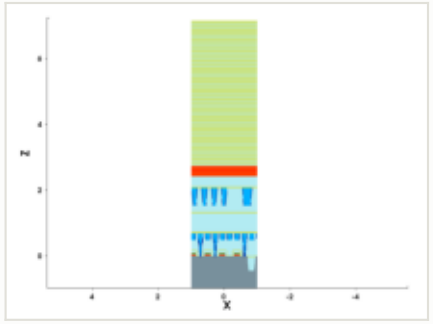

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

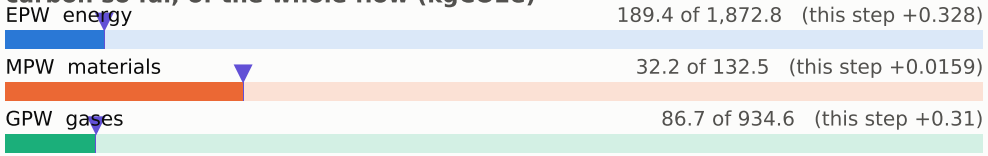

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

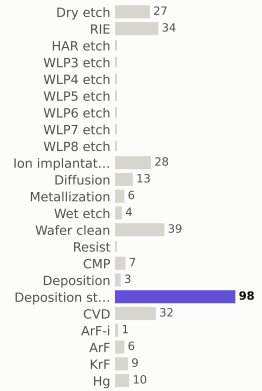

materials deposited (g)

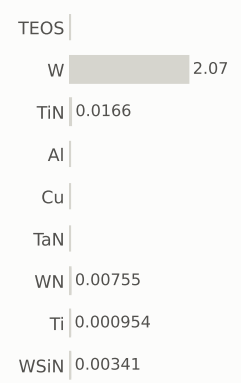

gases emitted (g)

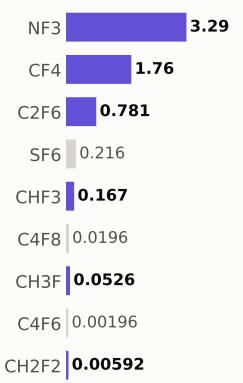

Step #4260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	309.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

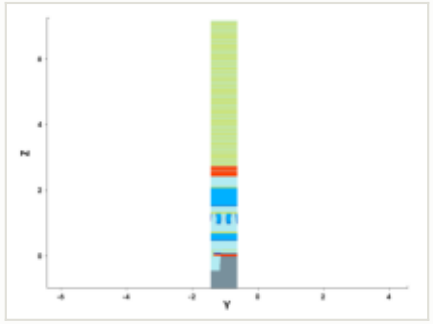

y cut at -1.035 µm

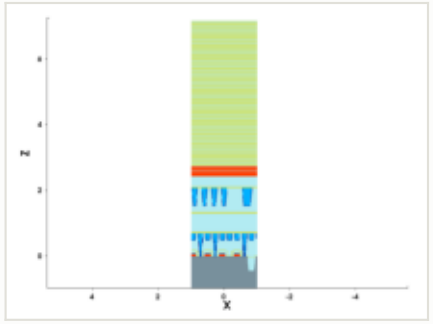

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

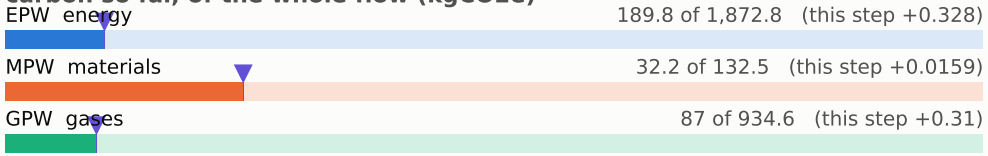

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

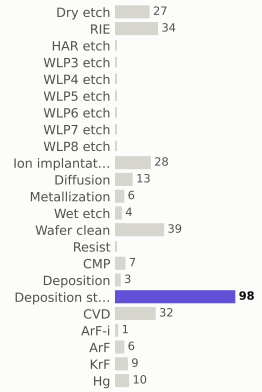

materials deposited (g)

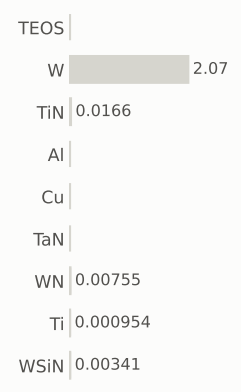

gases emitted (g)



Step #4270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	309.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

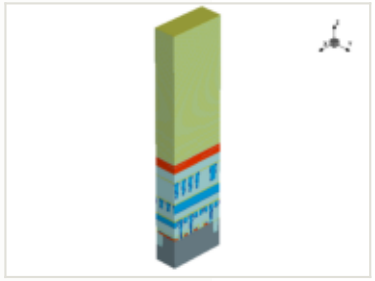

x cut at 0.000 µm

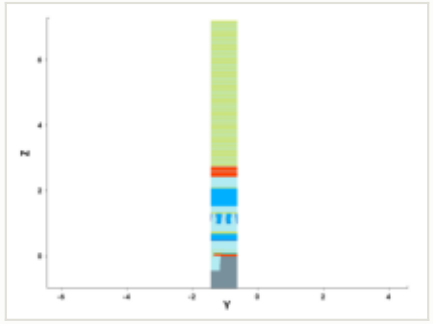

y cut at -1.035 µm

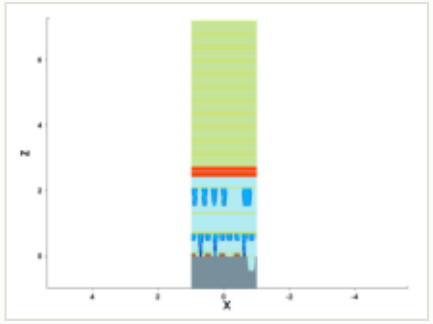

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

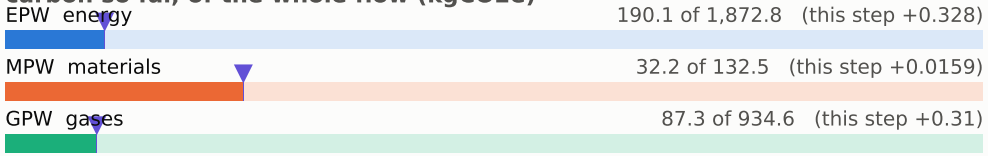

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

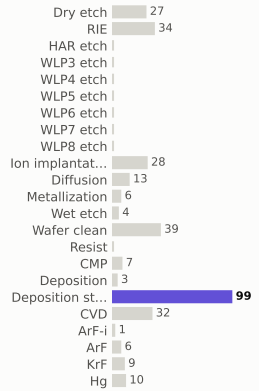

materials deposited (g)

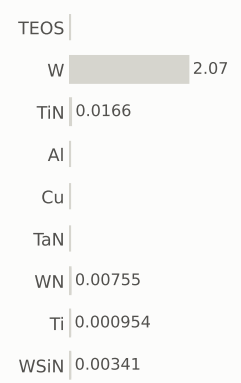

gases emitted (g)

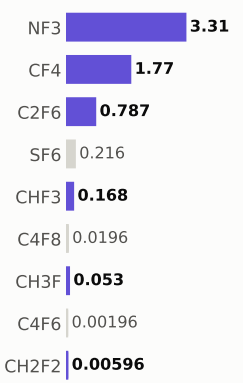

Step #4280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	310.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

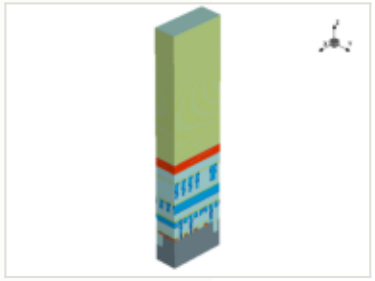

x cut at 0.000 µm

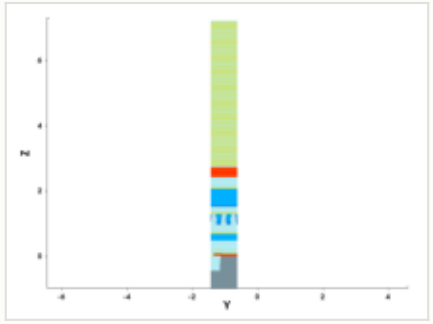

y cut at -1.035 µm

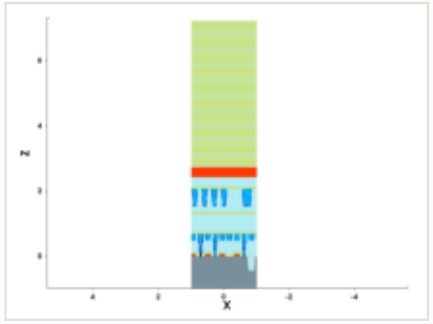

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

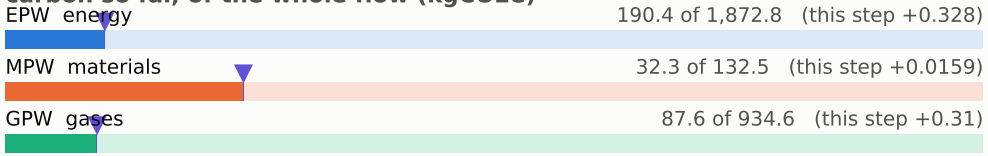

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

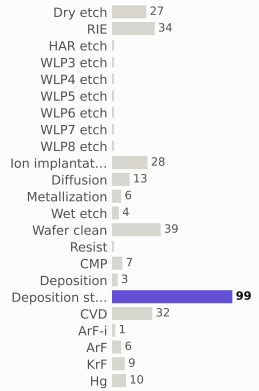

materials deposited (g)

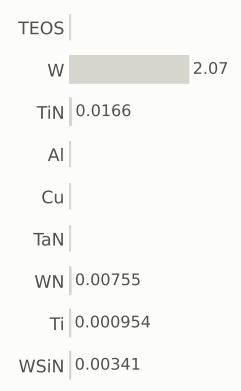

gases emitted (g)

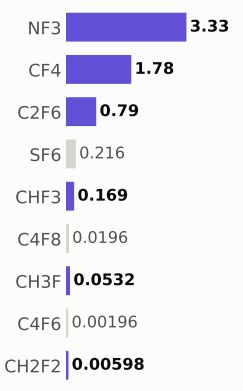

Step #4290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	311.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

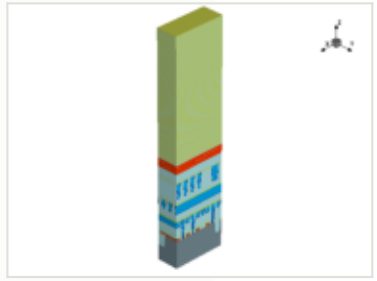

x cut at 0.000 µm

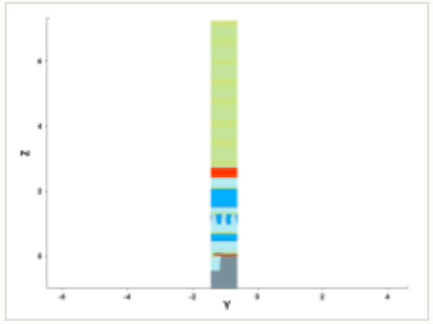

y cut at -1.035 µm

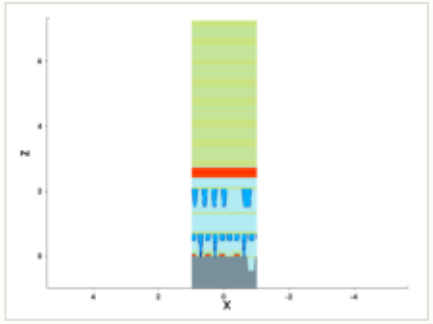

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

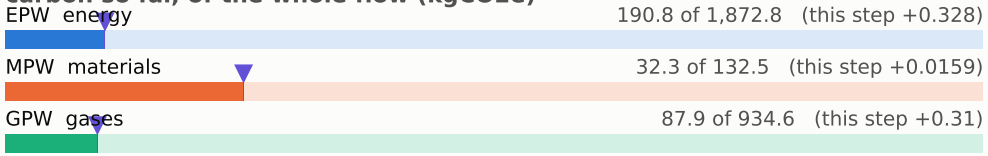

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

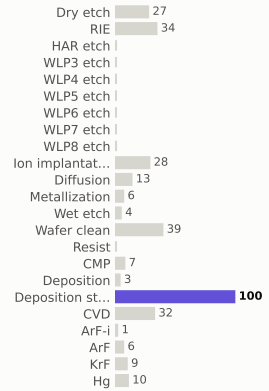

materials deposited (g)

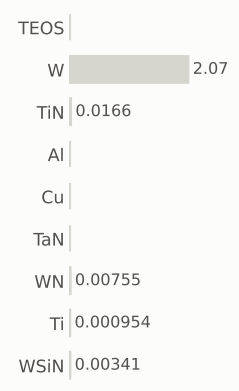

gases emitted (g)

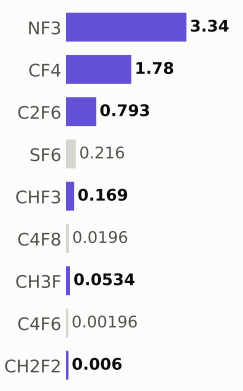

Step #4300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	311.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

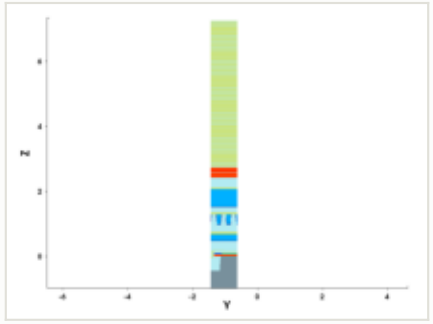

y cut at -1.035 µm

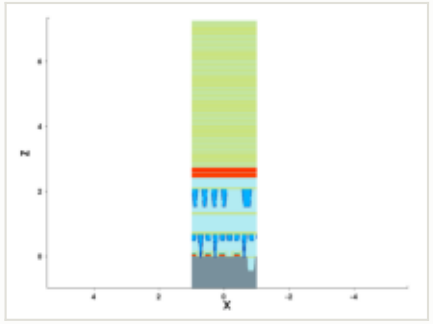

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

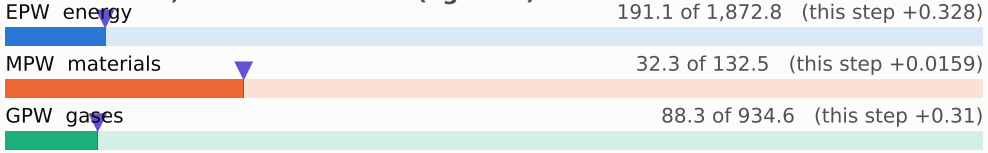

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

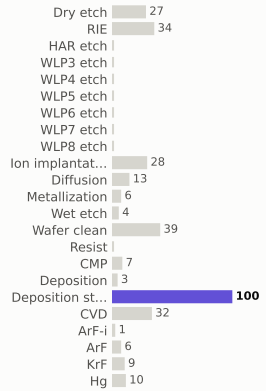

materials deposited (g)

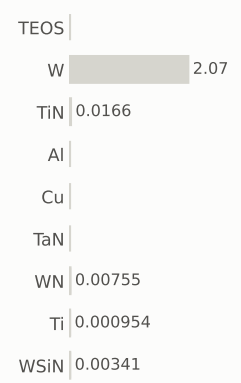

gases emitted (g)

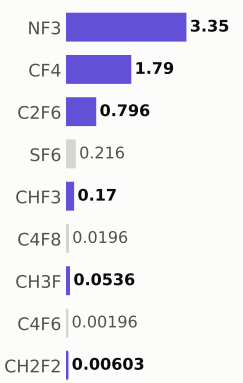

Step #4310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	312.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

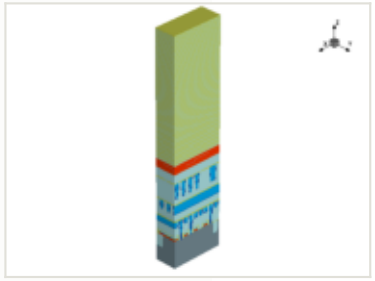

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

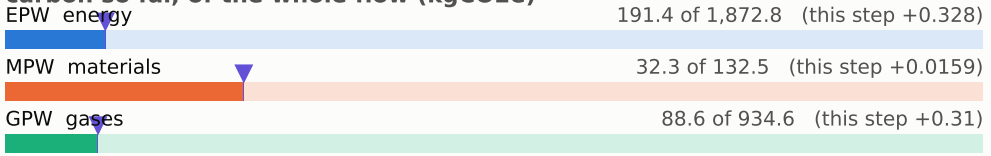

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

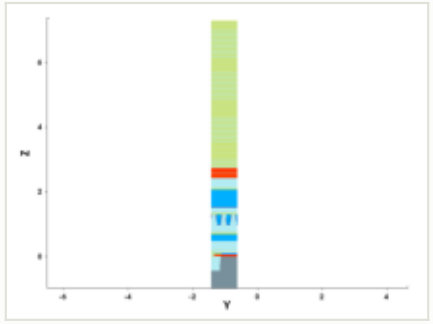

y cut at -1.035 µm

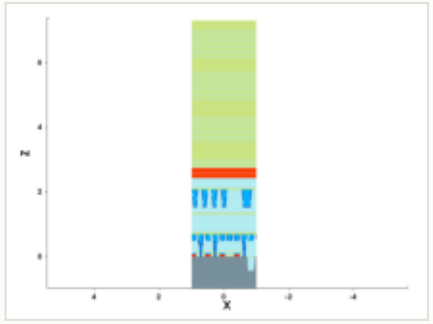

mask for this step

no mask for this step

steps by process area

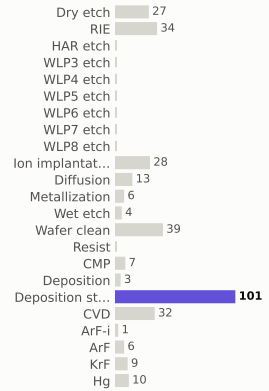

materials deposited (g)

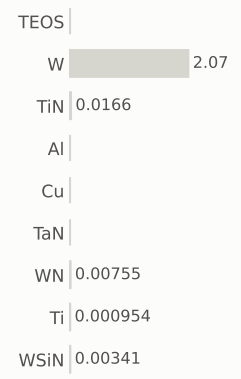

gases emitted (g)

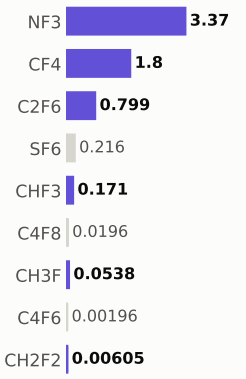

Step #4320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	312.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

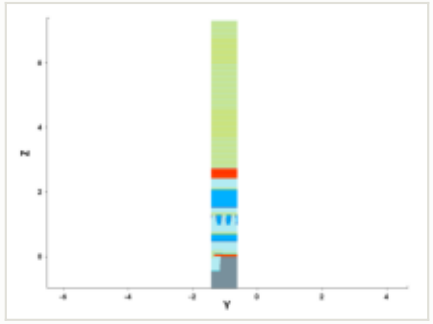

y cut at -1.035 µm

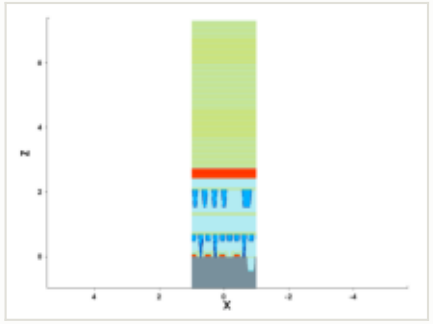

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

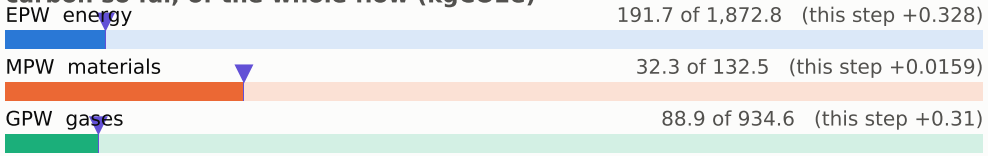

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

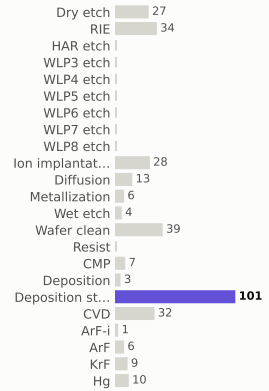

materials deposited (g)

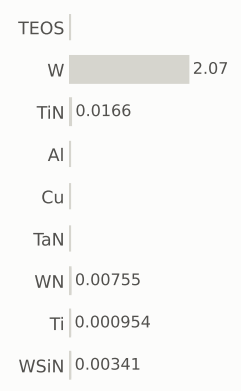

gases emitted (g)

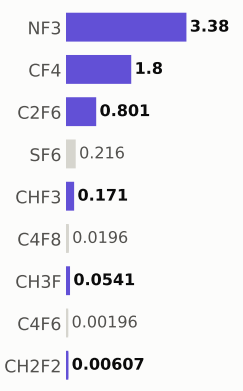

Step #4330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	313.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

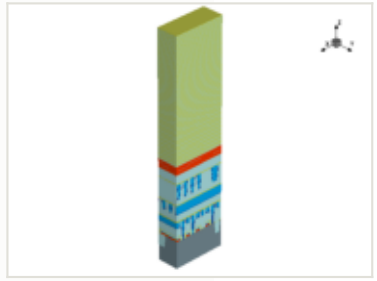

x cut at 0.000 µm

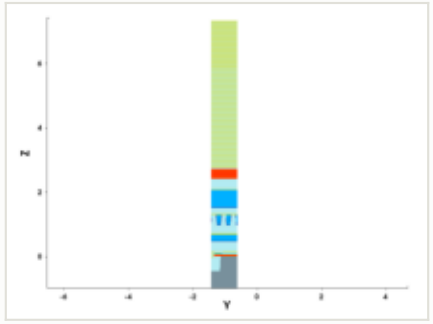

y cut at -1.035 µm

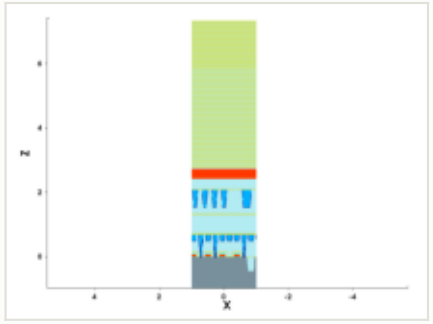

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

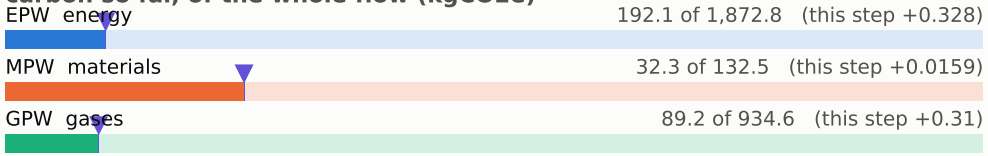

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

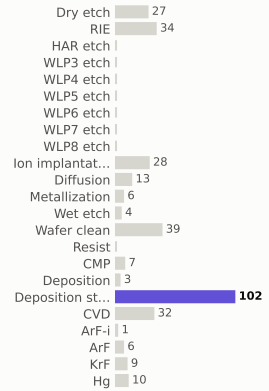

materials deposited (g)

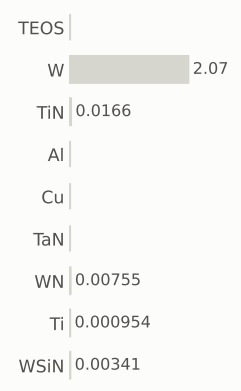

gases emitted (g)

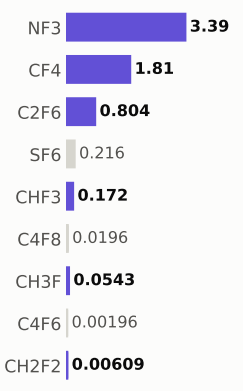

Step #4340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	314.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

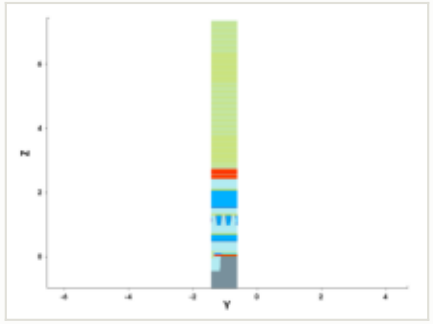

y cut at -1.035 µm

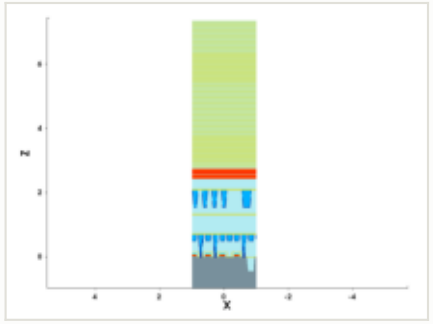

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

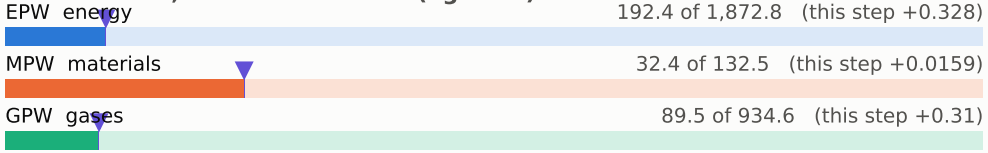

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

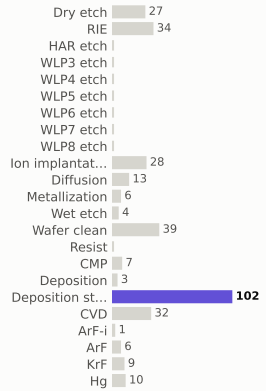

materials deposited (g)

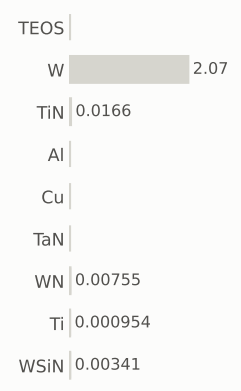

gases emitted (g)

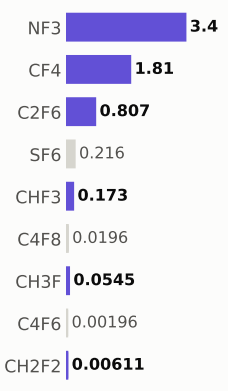

Step #4350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	314.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

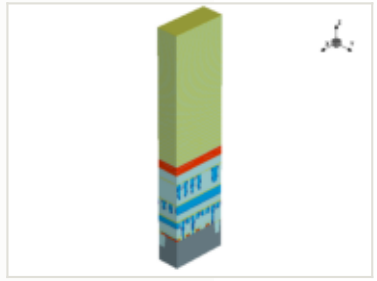

x cut at 0.000 µm

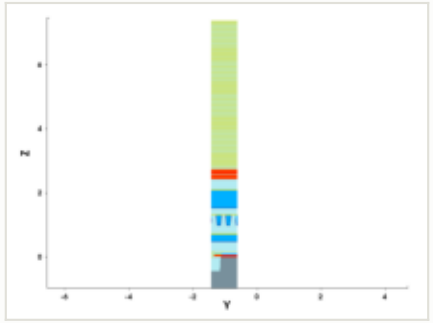

y cut at -1.035 µm

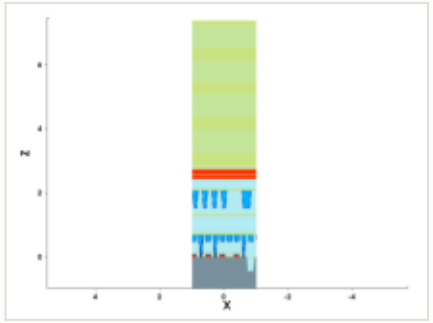

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

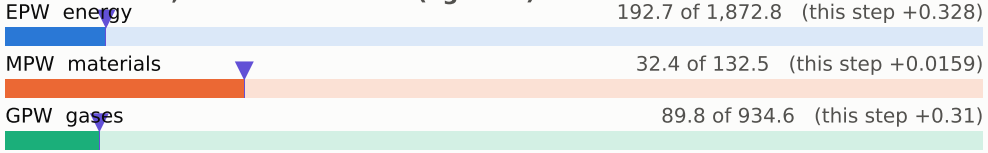

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

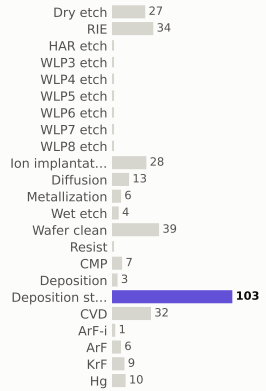

materials deposited (g)

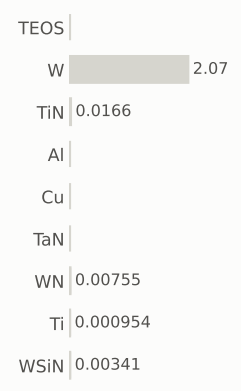

gases emitted (g)

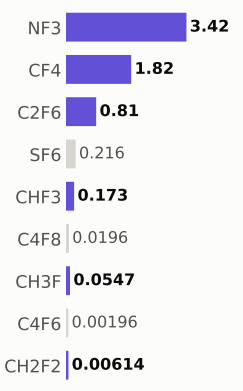

Step #4360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	315.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

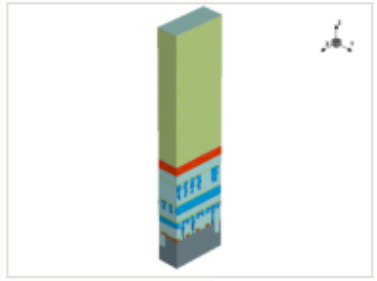

x cut at 0.000 µm

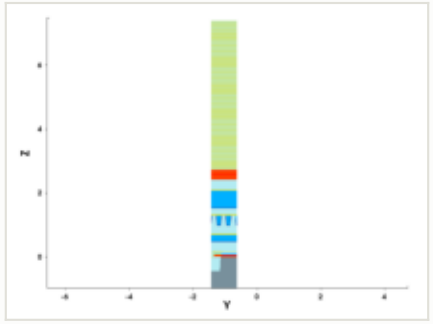

y cut at -1.035 µm

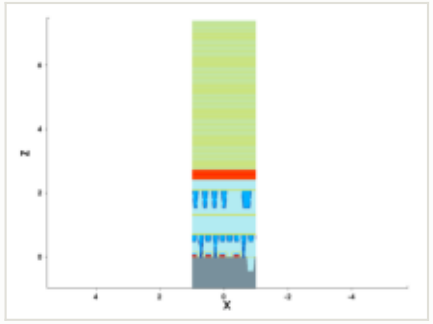

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

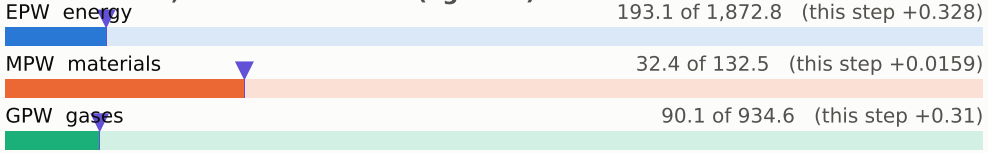

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

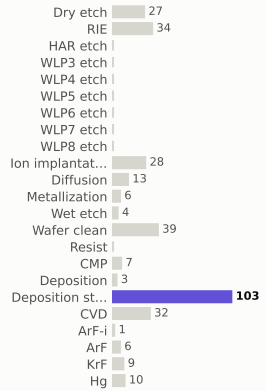

materials deposited (g)

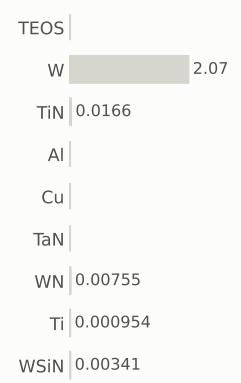

gases emitted (g)

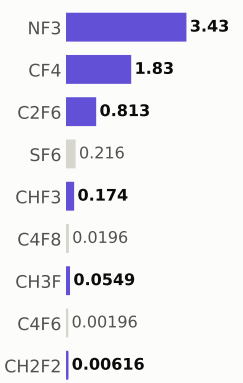

Step #4370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	316.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

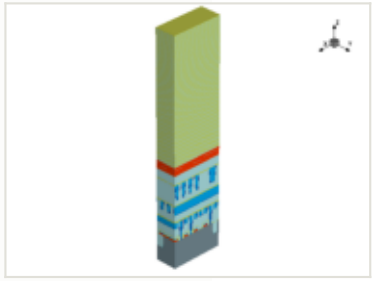

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

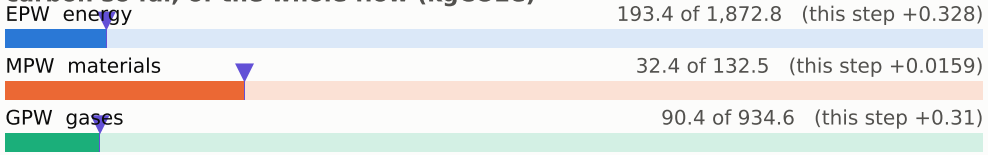

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

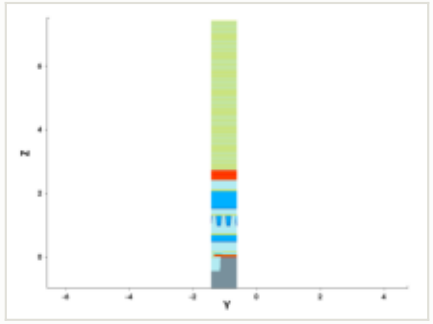

y cut at -1.035 µm

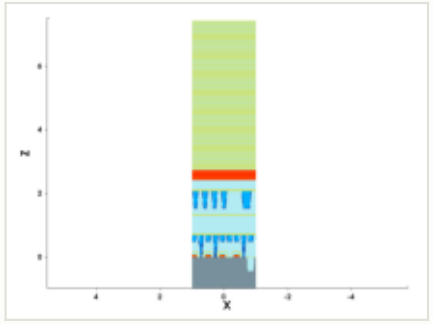

mask for this step

no mask for this step

steps by process area

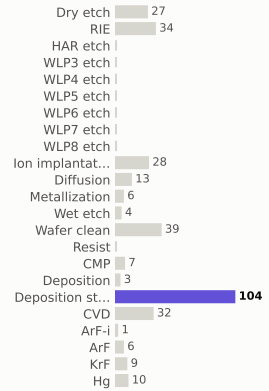

materials deposited (g)

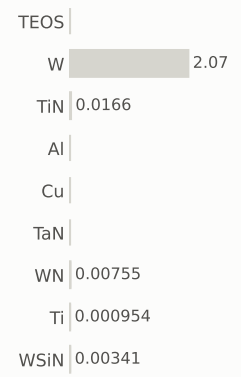

gases emitted (g)

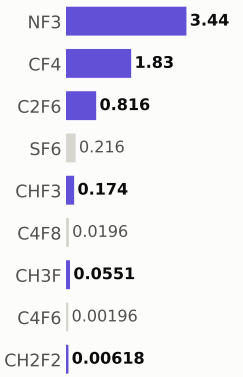

Step #4380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	316.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

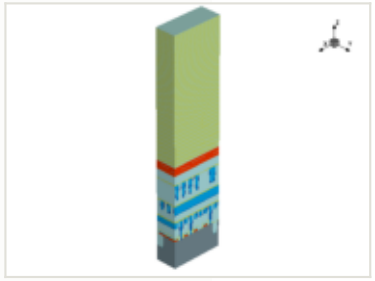

x cut at 0.000 µm

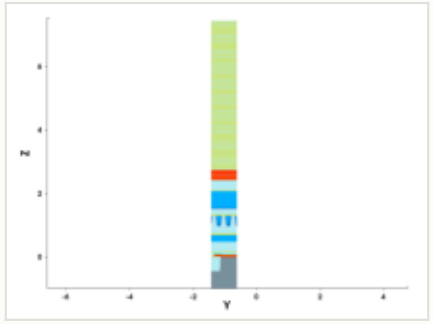

y cut at -1.035 µm

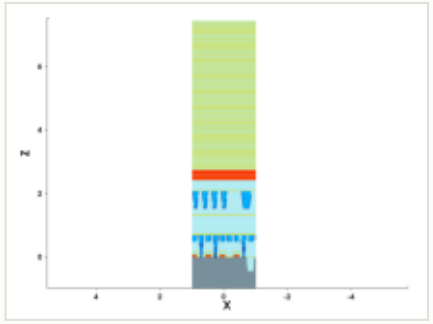

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

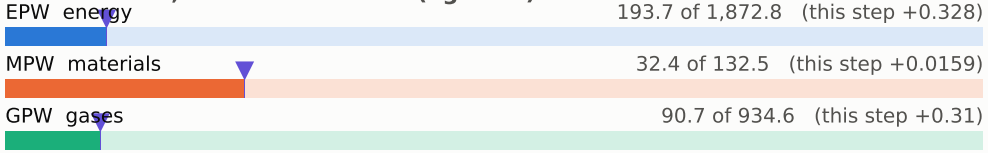

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

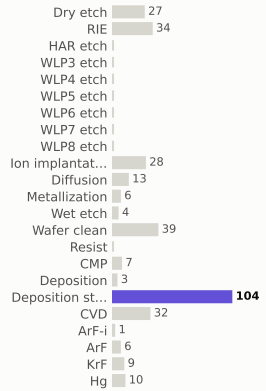

materials deposited (g)

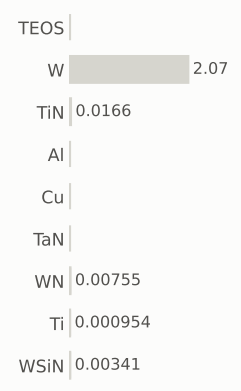

gases emitted (g)

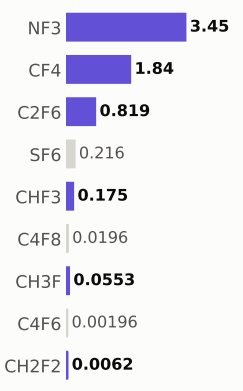

Step #4390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	317.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

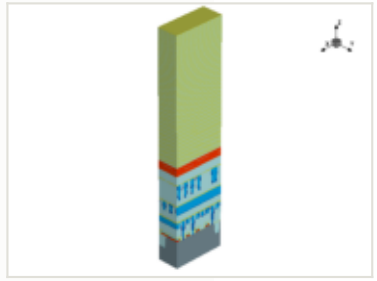

x cut at 0.000 µm

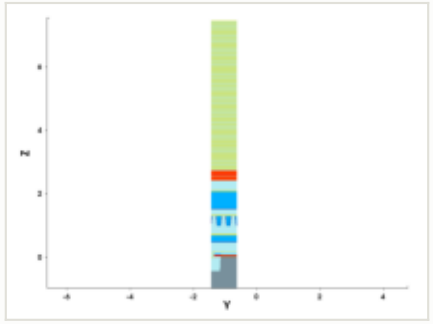

y cut at -1.035 µm

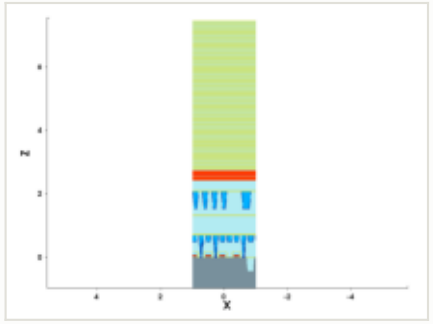

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

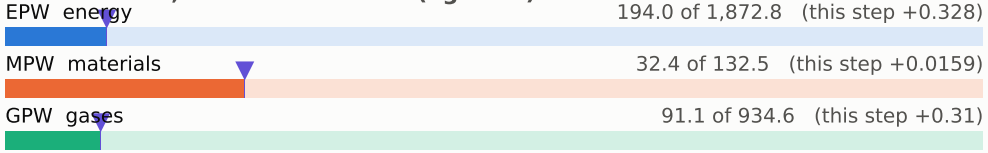

embodied carbon up to each step (kgCO2e per wafer)

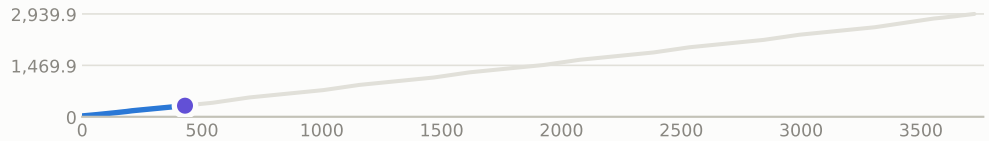

steps by process area

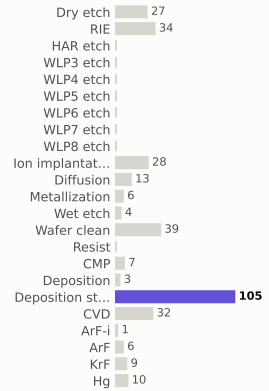

materials deposited (g)

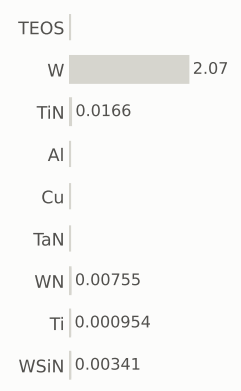

gases emitted (g)

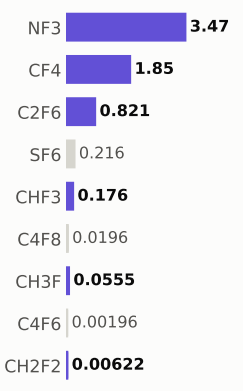

Step #4400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	318.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

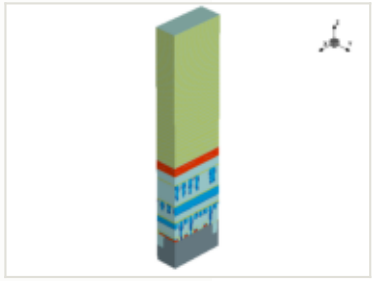

x cut at 0.000 µm

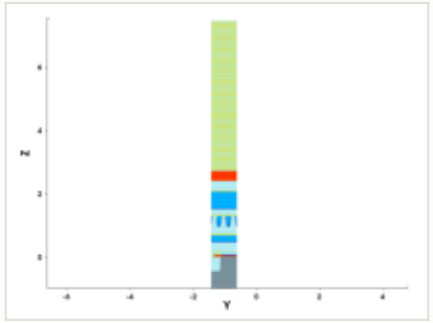

y cut at -1.035 µm

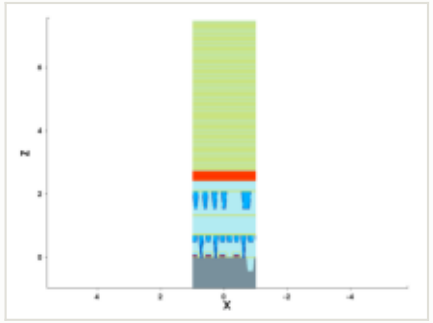

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

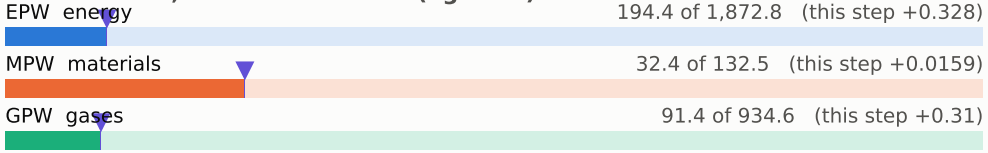

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

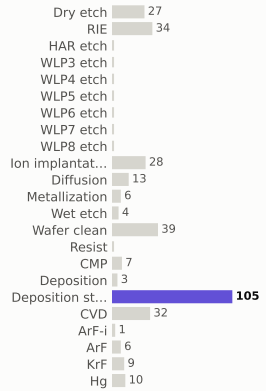

materials deposited (g)

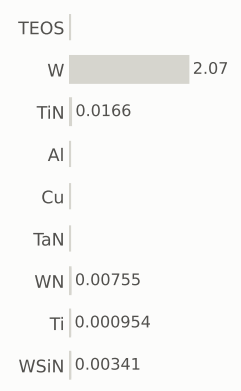

gases emitted (g)

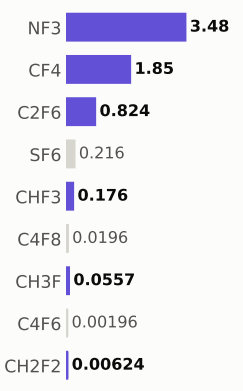

Step #4410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	318.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

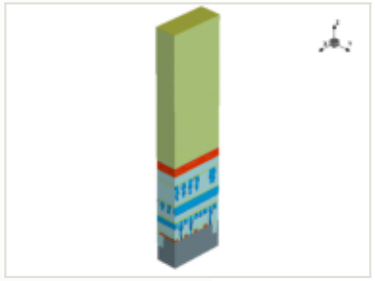

x cut at 0.000 µm

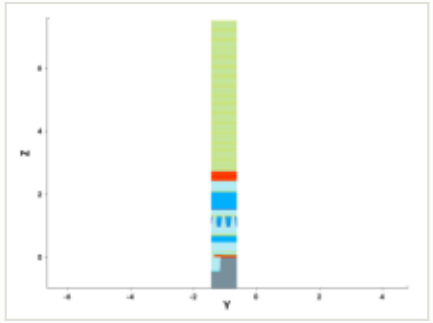

y cut at -1.035 µm

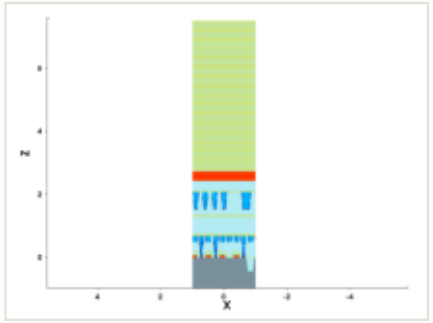

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

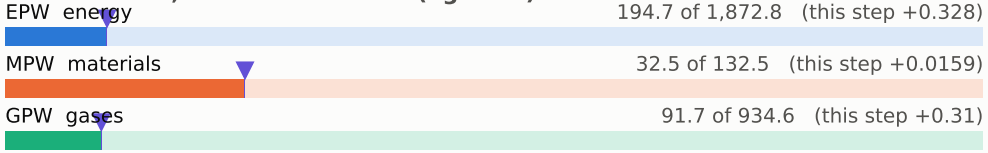

embodied carbon up to each step (kgCO2e per wafer)

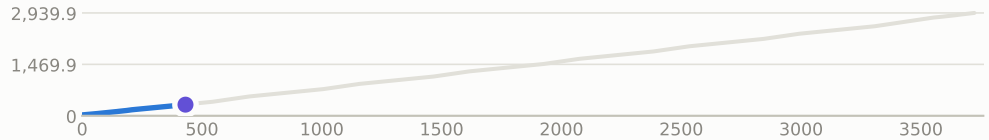

steps by process area

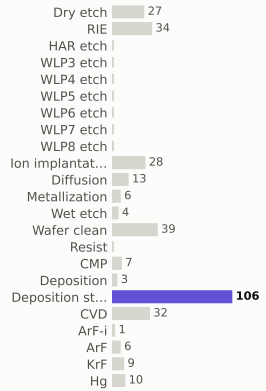

materials deposited (g)

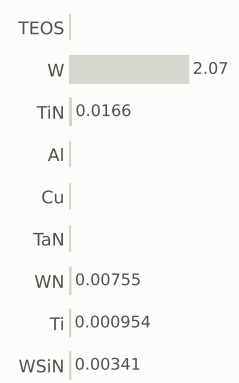

gases emitted (g)

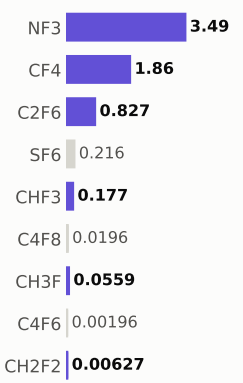

Step #4420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	319.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

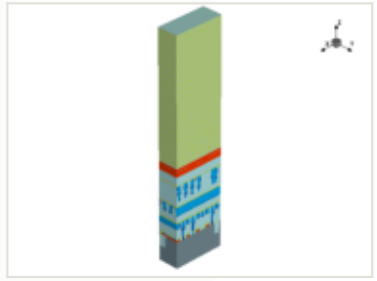

x cut at 0.000 µm

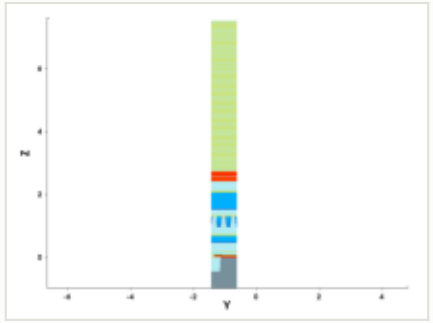

y cut at -1.035 µm

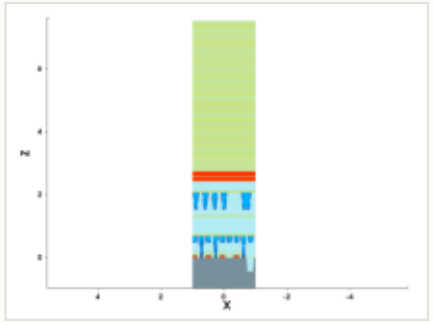

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

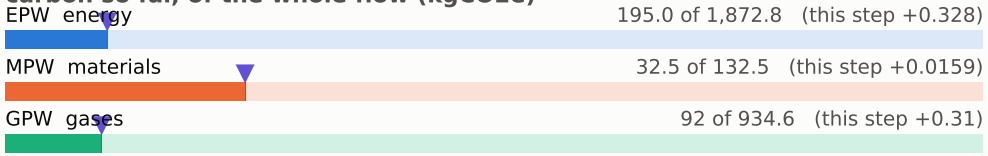

embodied carbon up to each step (kgCO2e per wafer)

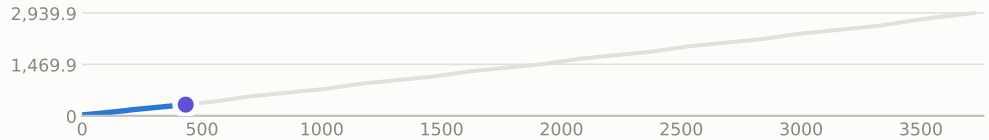

steps by process area

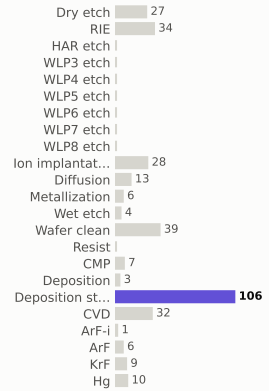

materials deposited (g)

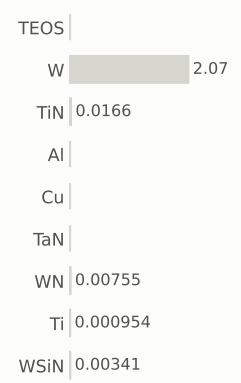

gases emitted (g)

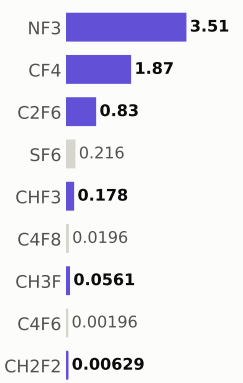

Step #4430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	320.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

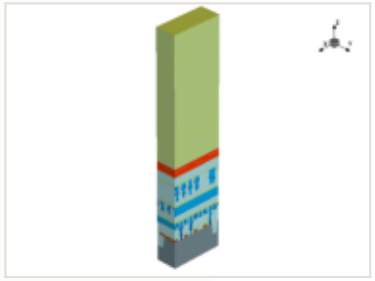

x cut at 0.000 µm

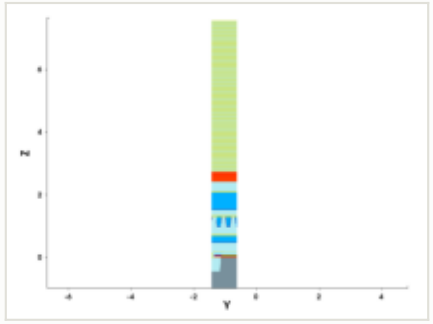

y cut at -1.035 µm

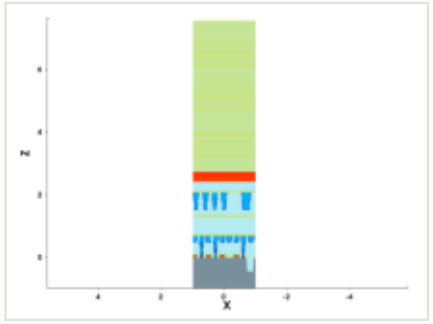

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

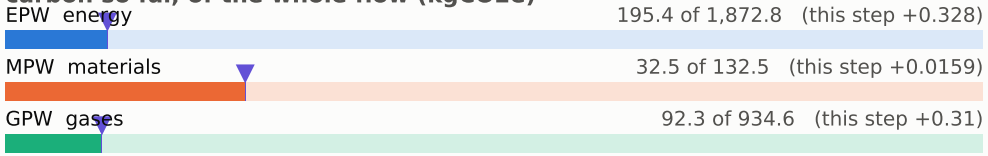

embodied carbon up to each step (kgCO2e per wafer)

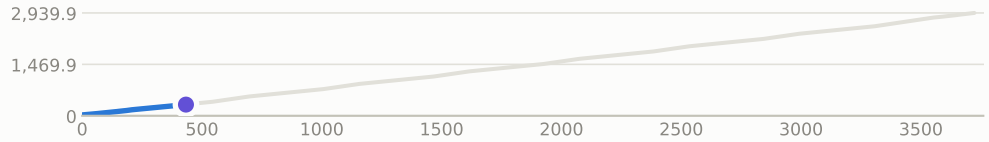

steps by process area

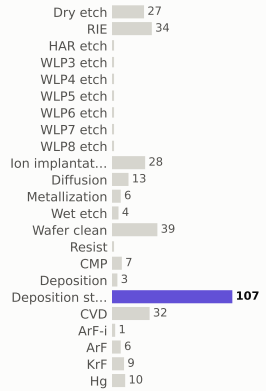

materials deposited (g)

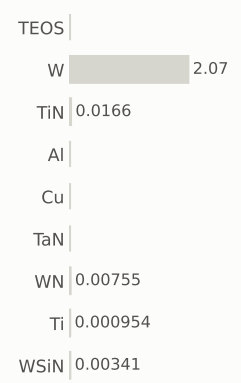

gases emitted (g)

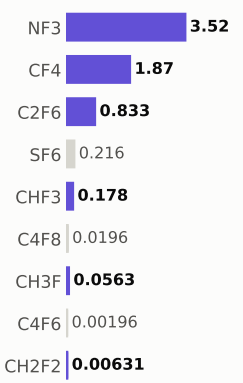

Step #4440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	320.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

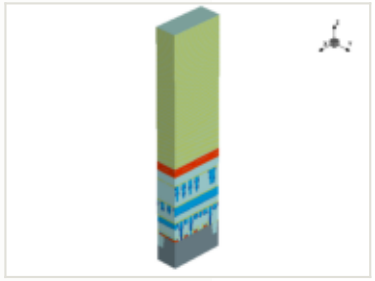

x cut at 0.000 µm

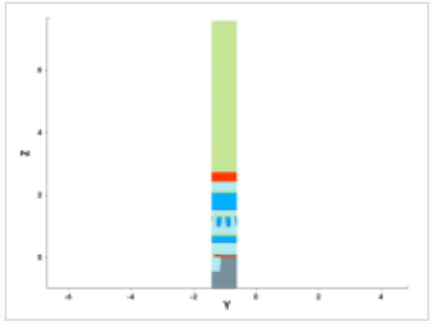

y cut at -1.035 µm

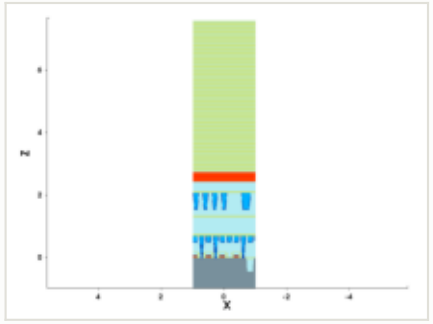

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

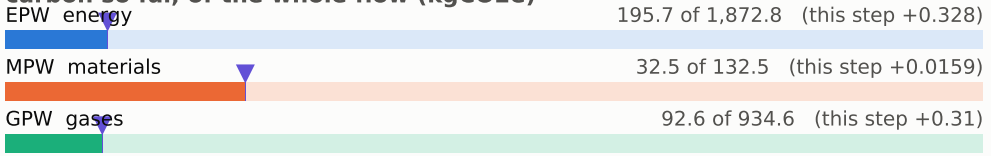

embodied carbon up to each step (kgCO2e per wafer)

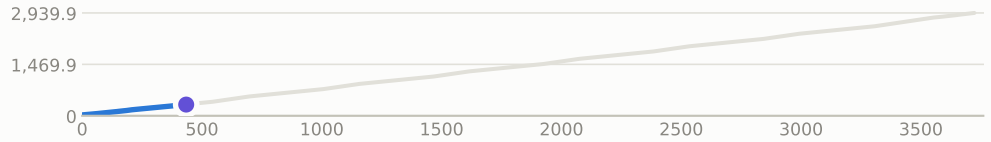

steps by process area

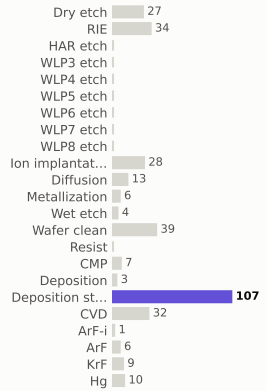

materials deposited (g)

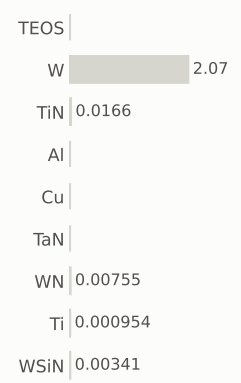

gases emitted (g)

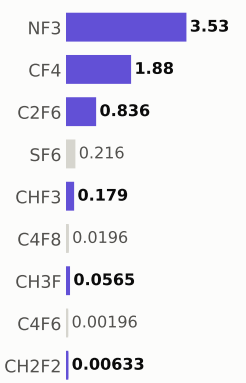

Step #4450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	321.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

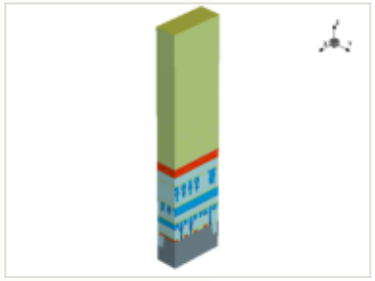

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

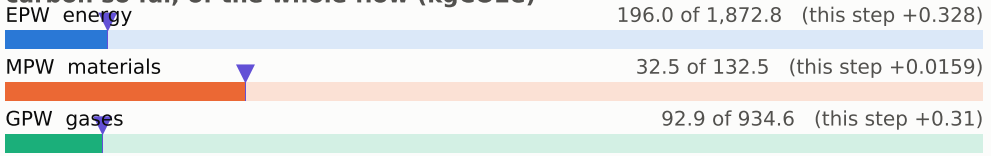

embodied carbon up to each step (kgCO2e per wafer)

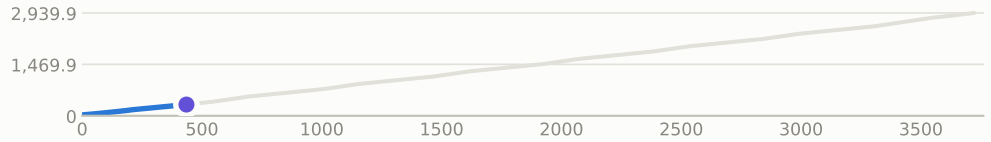

x cut at 0.000 µm

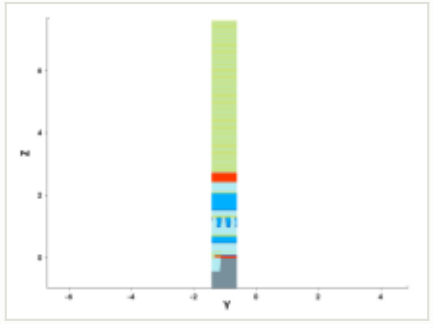

y cut at -1.035 µm

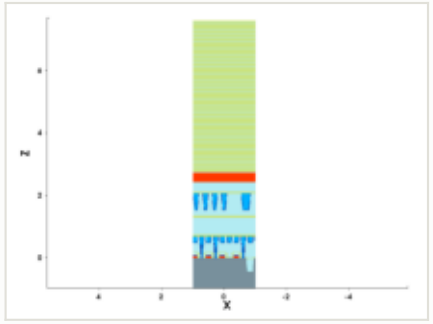

mask for this step

no mask for this step

steps by process area

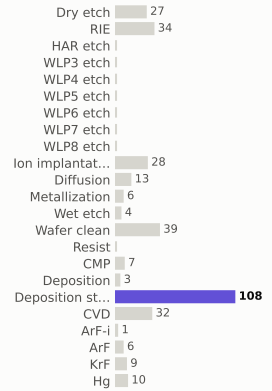

materials deposited (g)

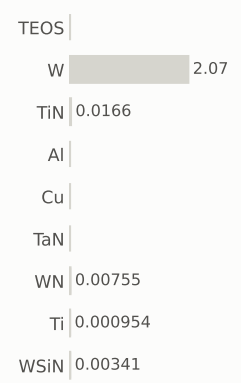

gases emitted (g)

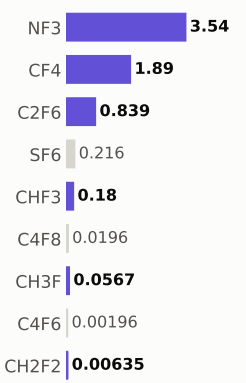

Step #4460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	322.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

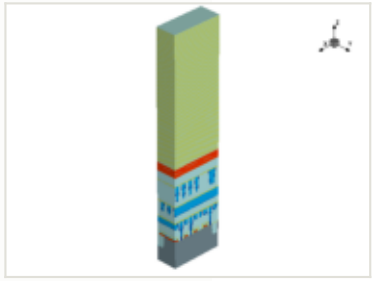

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

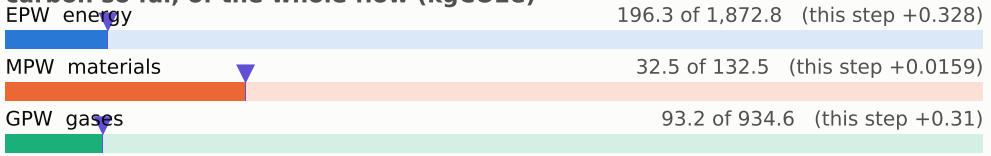

embodied carbon up to each step (kgCO2e per wafer)

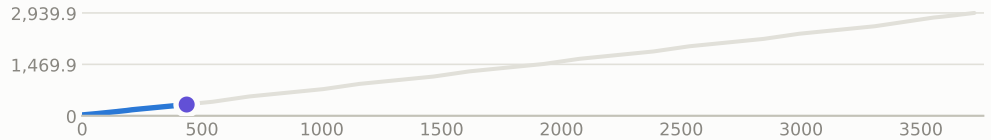

x cut at 0.000 µm

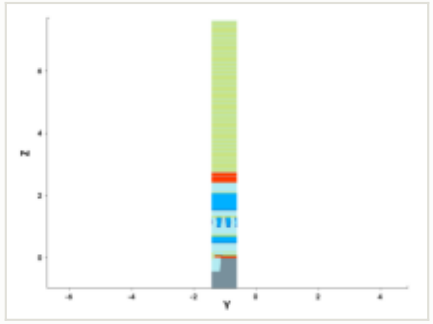

y cut at -1.035 µm

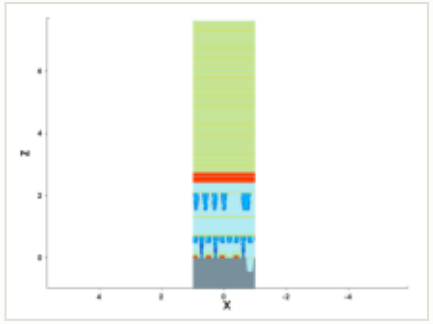

mask for this step

no mask for this step

steps by process area

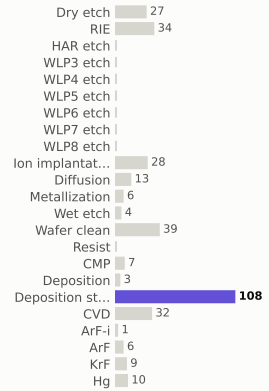

materials deposited (g)

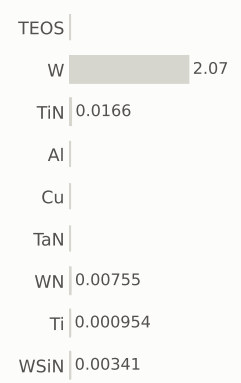

gases emitted (g)

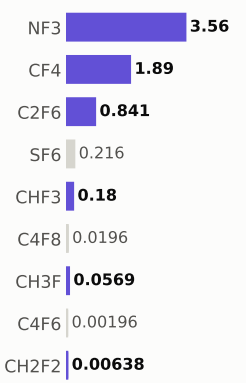

Step #4470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	322.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

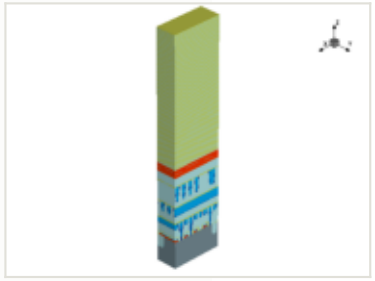

x cut at 0.000 µm

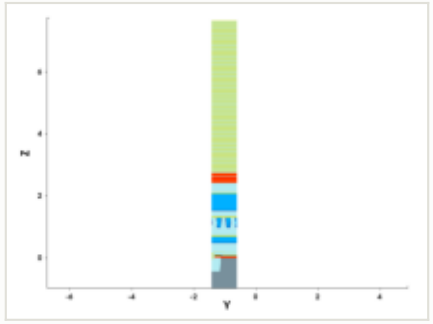

y cut at -1.035 µm

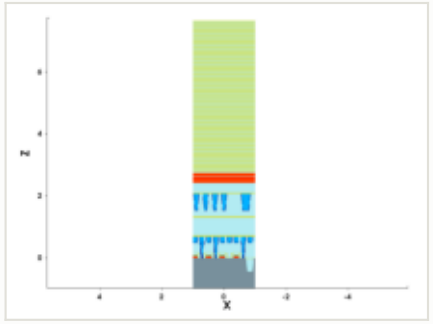

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

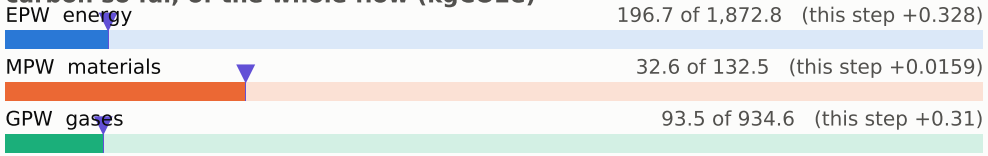

embodied carbon up to each step (kgCO2e per wafer)

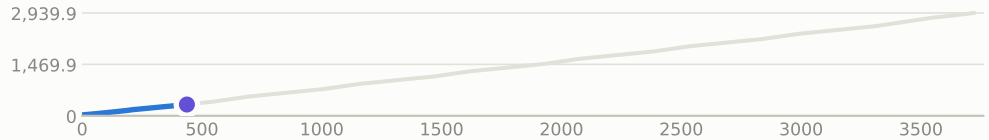

steps by process area

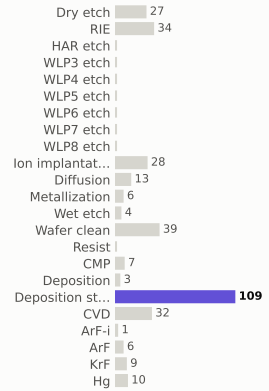

materials deposited (g)

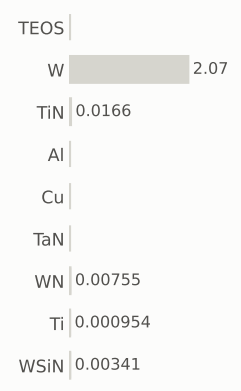

gases emitted (g)

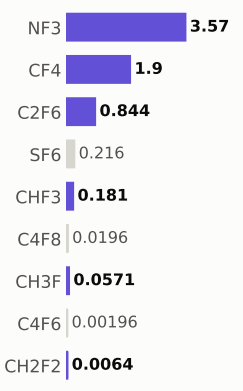

Step #4480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	323.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

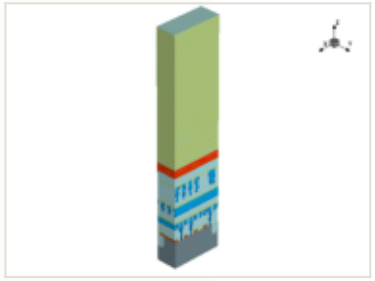

x cut at 0.000 µm

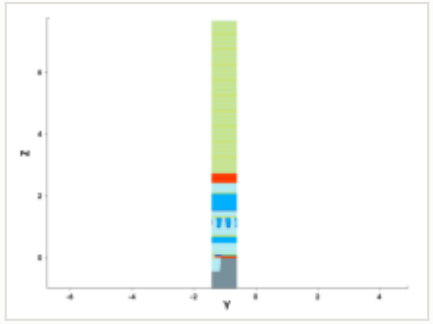

y cut at -1.035 µm

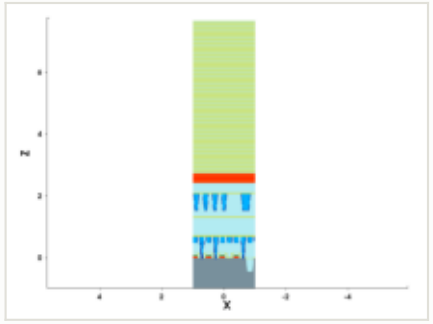

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

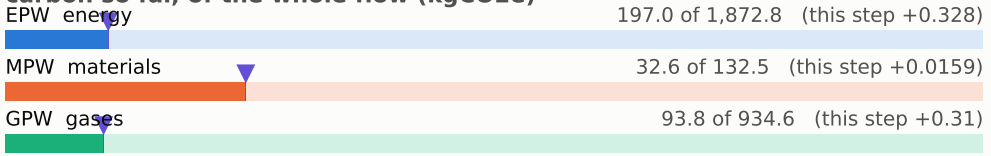

embodied carbon up to each step (kgCO2e per wafer)

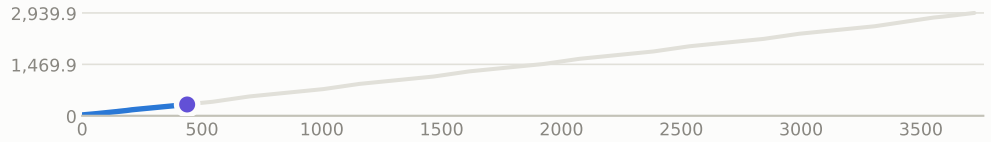

steps by process area

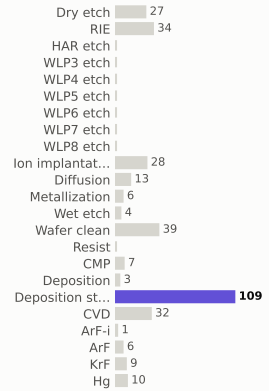

materials deposited (g)

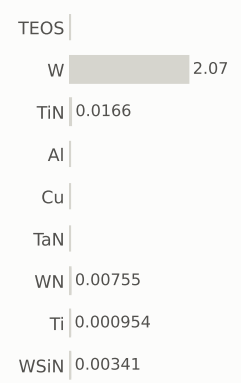

gases emitted (g)

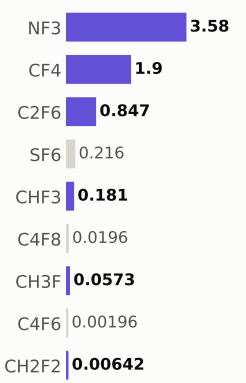

Step #4490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	324.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

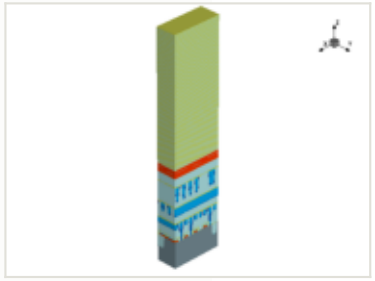

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

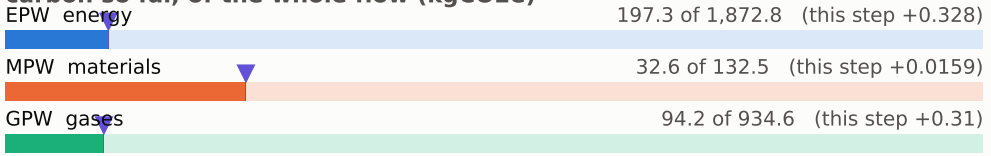

embodied carbon up to each step (kgCO2e per wafer)

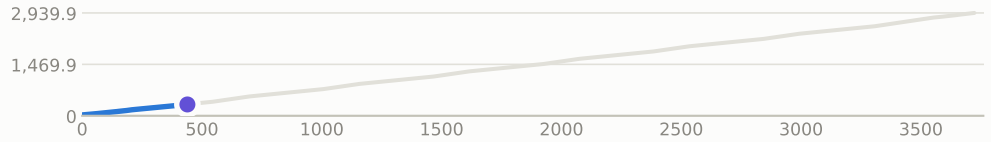

x cut at 0.000 µm

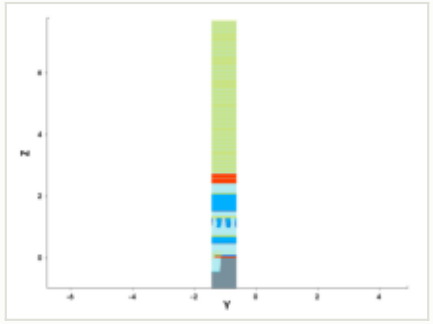

y cut at -1.035 µm

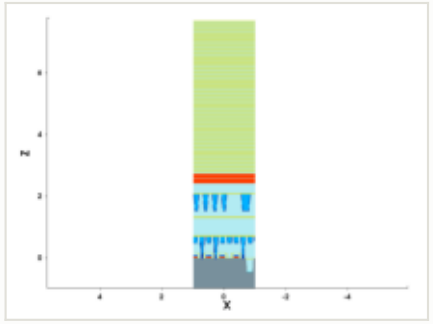

mask for this step

no mask for this step

steps by process area

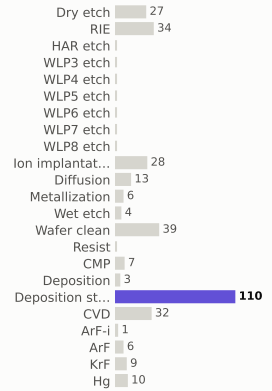

materials deposited (g)

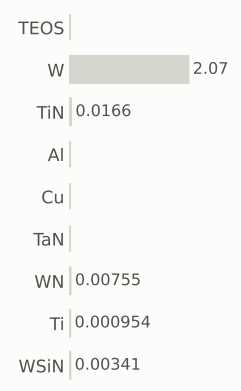

gases emitted (g)

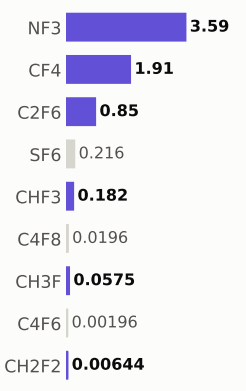

Step #4500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	324.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

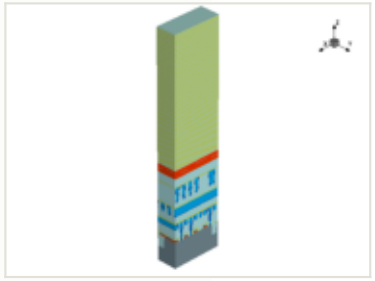

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

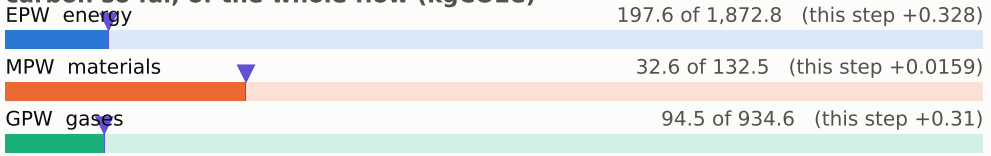

embodied carbon up to each step (kgCO2e per wafer)

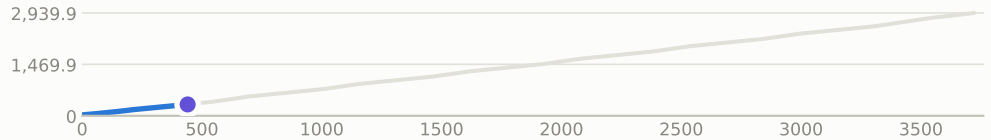

x cut at 0.000 µm

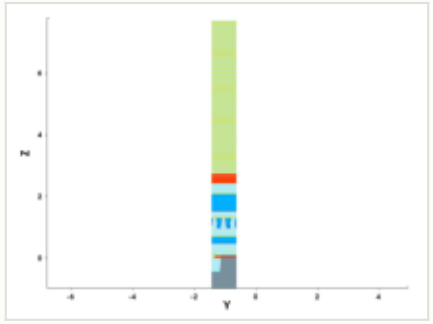

y cut at -1.035 µm

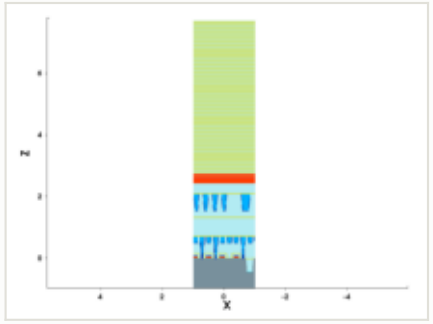

mask for this step

no mask for this step

steps by process area

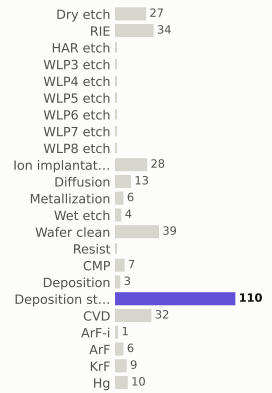

materials deposited (g)

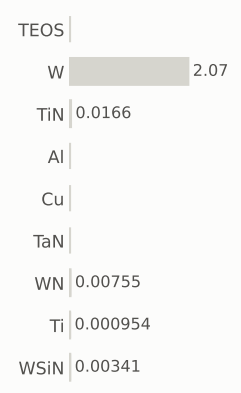

gases emitted (g)

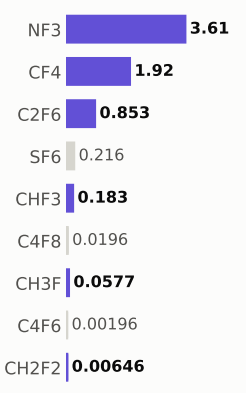

Step #4510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	325.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

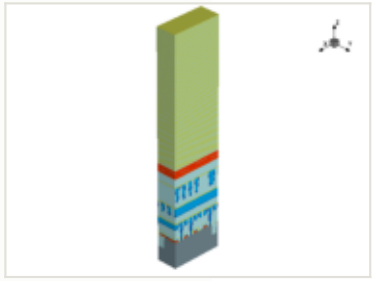

x cut at 0.000 µm

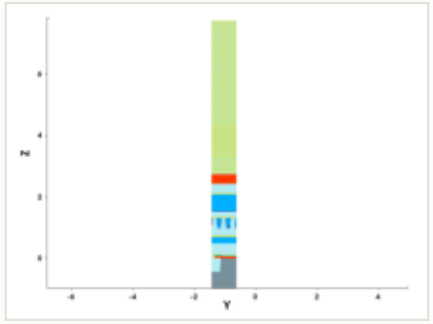

y cut at -1.035 µm

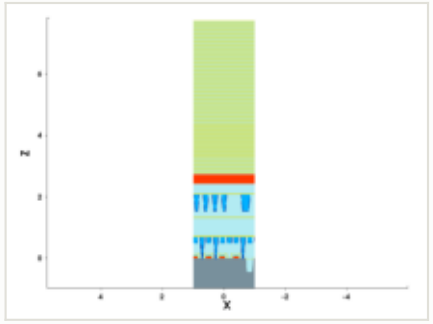

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

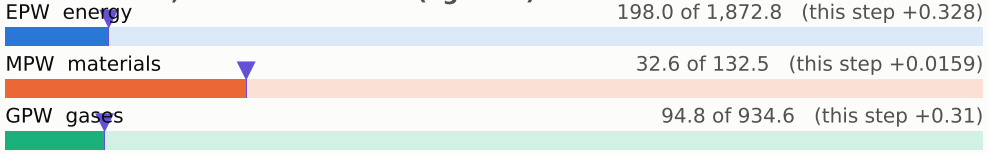

embodied carbon up to each step (kgCO2e per wafer)

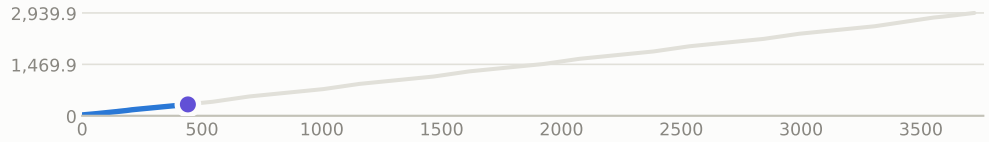

steps by process area

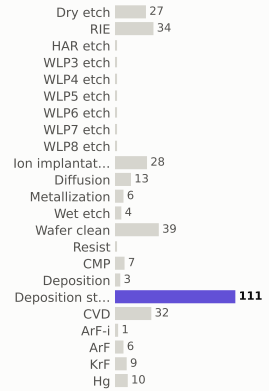

materials deposited (g)

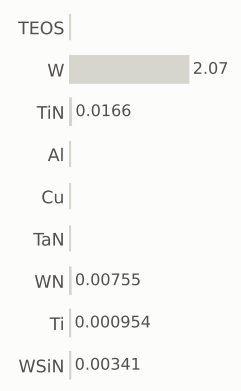

gases emitted (g)

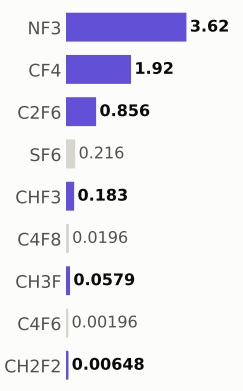

Step #4520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	326.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

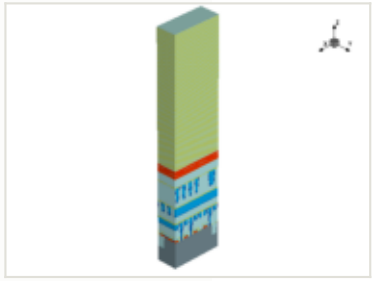

x cut at 0.000 µm

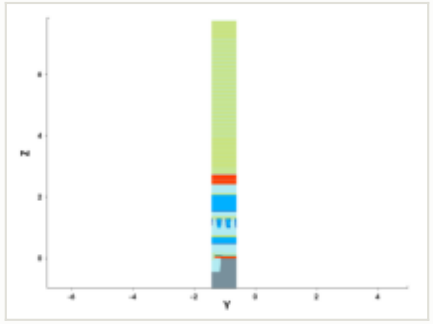

y cut at -1.035 µm

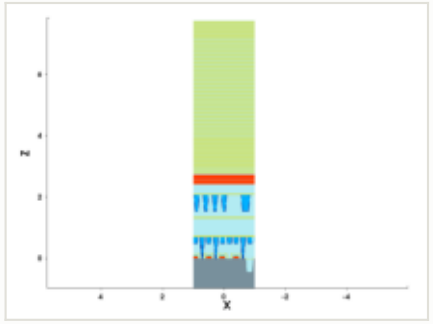

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

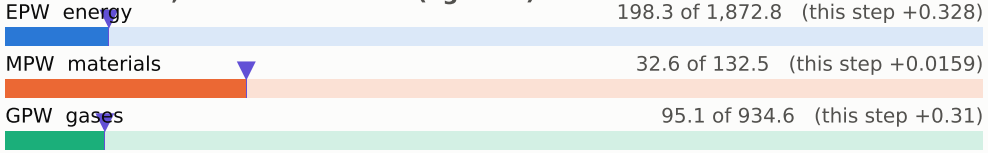

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

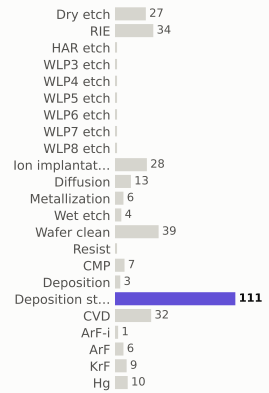

materials deposited (g)

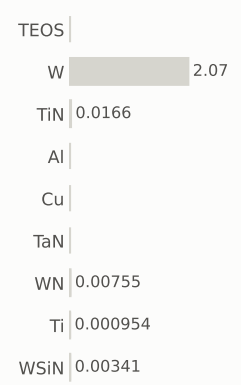

gases emitted (g)

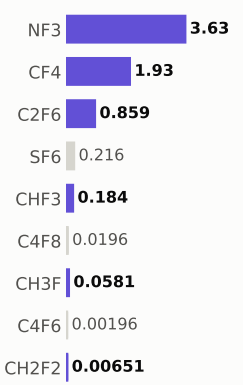

Step #4530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	326.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

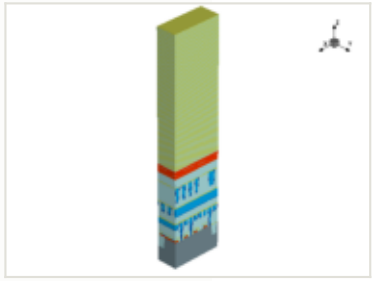

x cut at 0.000 µm

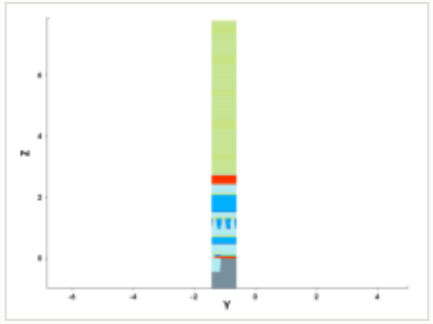

y cut at -1.035 µm

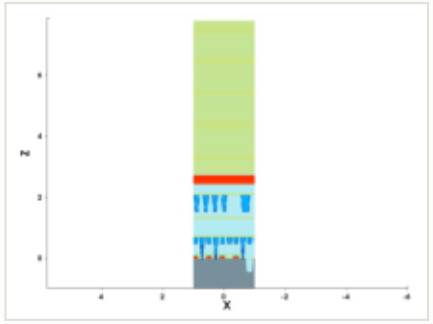

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

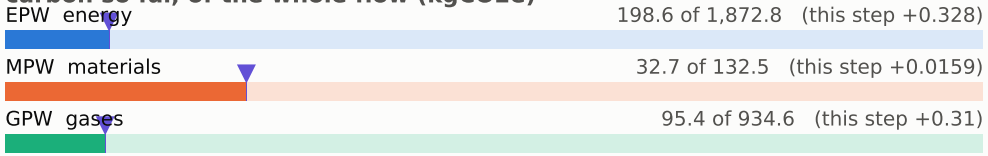

embodied carbon up to each step (kgCO2e per wafer)

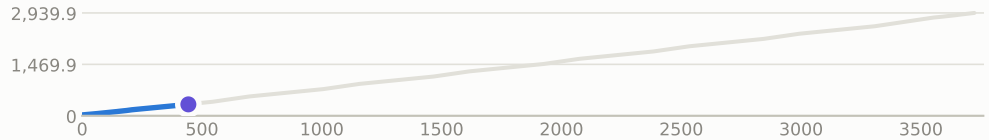

steps by process area

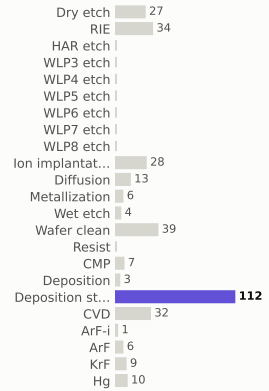

materials deposited (g)

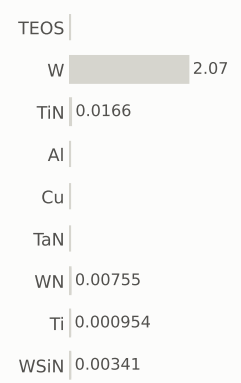

gases emitted (g)

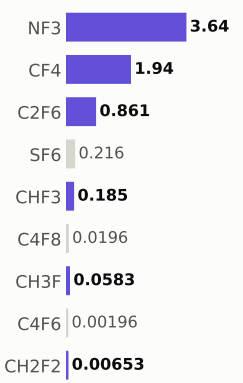

Step #4540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	327.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

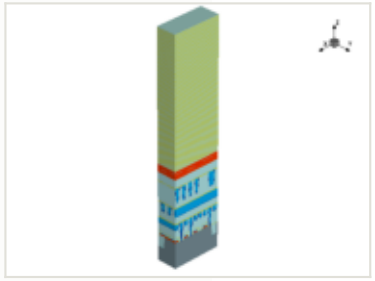

x cut at 0.000 µm

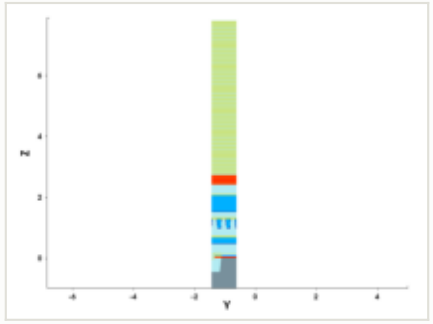

y cut at -1.035 µm

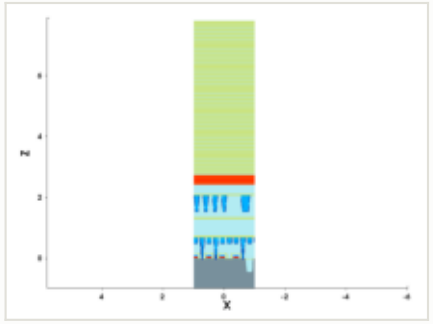

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

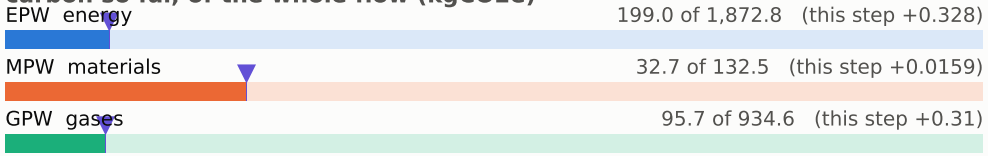

embodied carbon up to each step (kgCO2e per wafer)

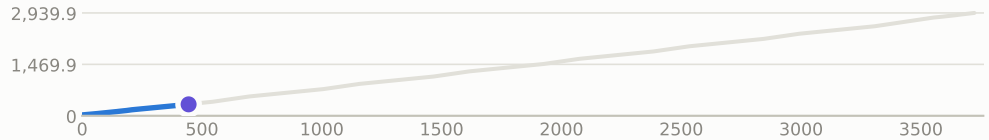

steps by process area

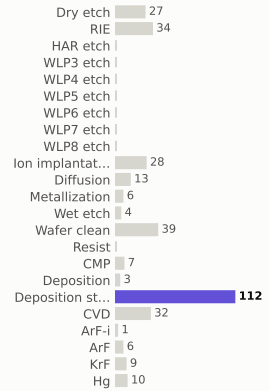

materials deposited (g)

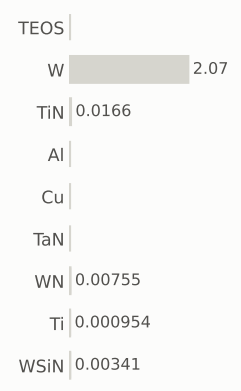

gases emitted (g)

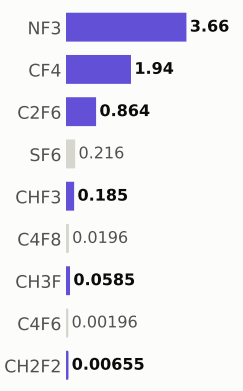

Step #4550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	328.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

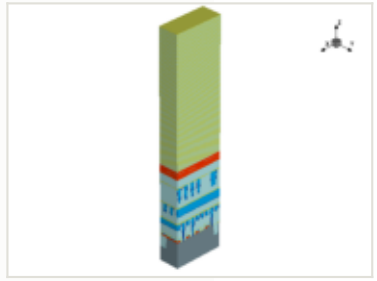

x cut at 0.000 µm

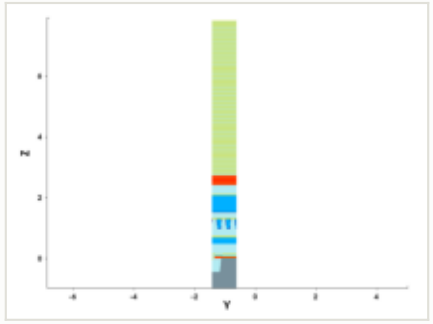

y cut at -1.035 µm

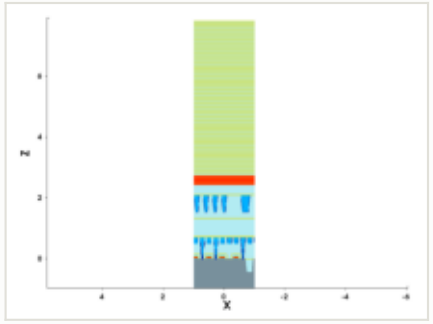

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

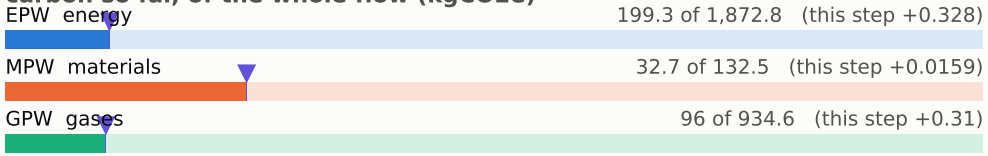

embodied carbon up to each step (kgCO2e per wafer)

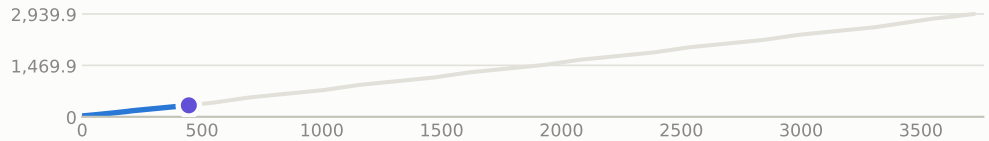

steps by process area

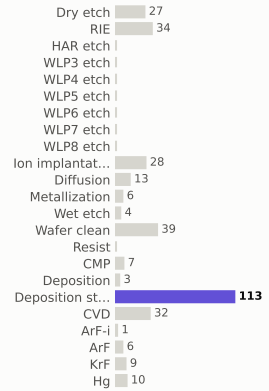

materials deposited (g)

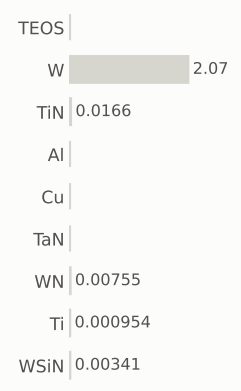

gases emitted (g)

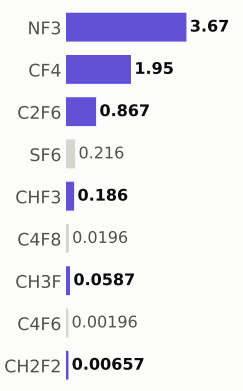

Step #4560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	328.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

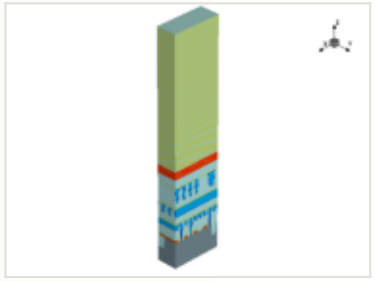

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

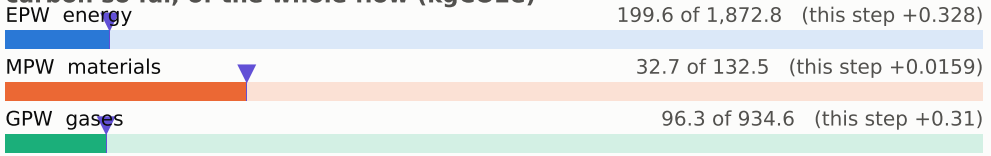

embodied carbon up to each step (kgCO2e per wafer)

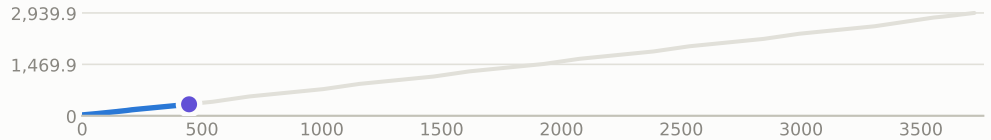

x cut at 0.000 µm

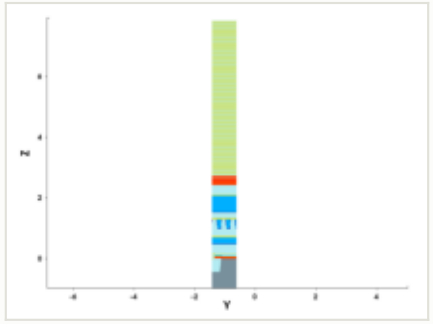

y cut at -1.035 µm

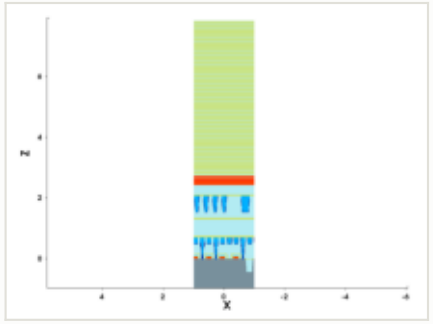

mask for this step

no mask for this step

steps by process area

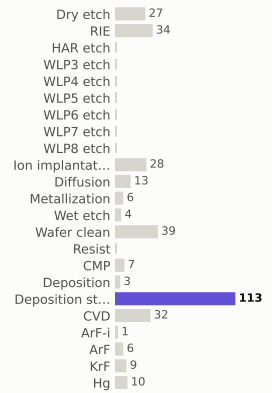

materials deposited (g)

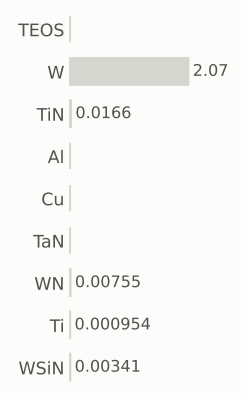

gases emitted (g)

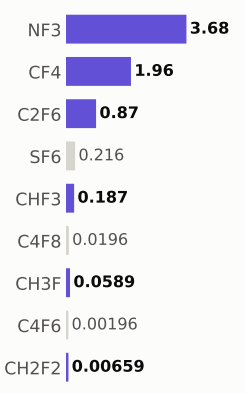

Step #4570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	329.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

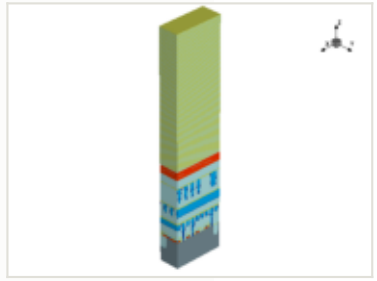

x cut at 0.000 µm

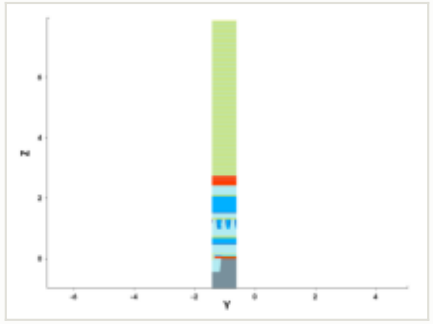

y cut at -1.035 µm

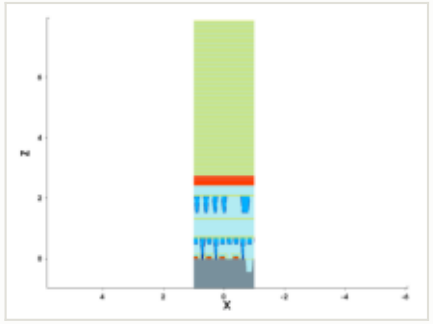

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

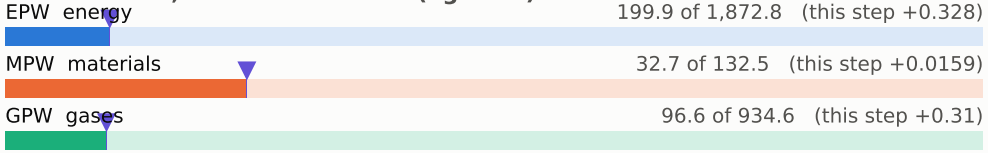

embodied carbon up to each step (kgCO2e per wafer)

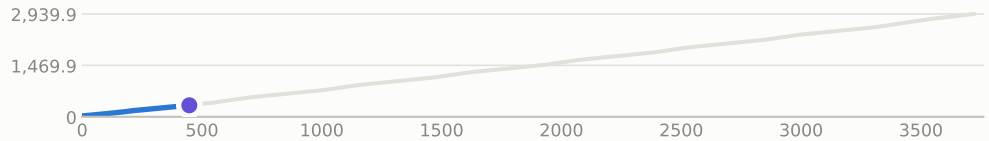

steps by process area

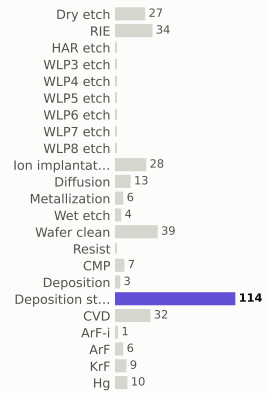

materials deposited (g)

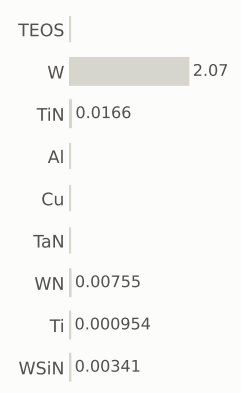

gases emitted (g)



Step #4580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	330.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

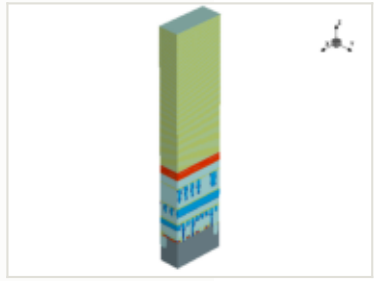

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

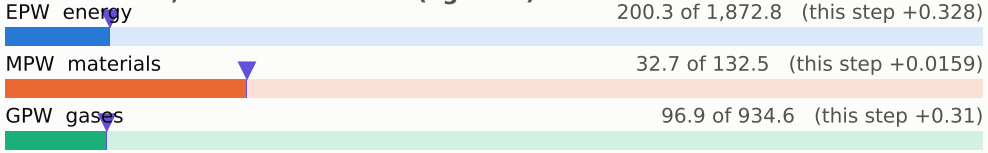

embodied carbon up to each step (kgCO2e per wafer)

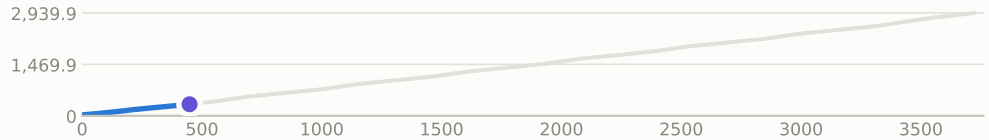

x cut at 0.000 µm

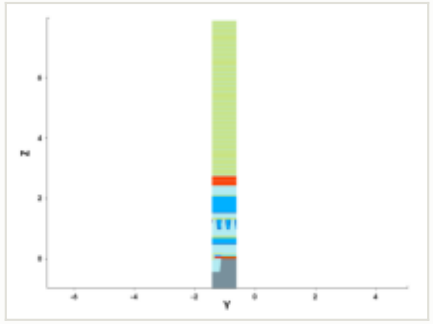

y cut at -1.035 µm

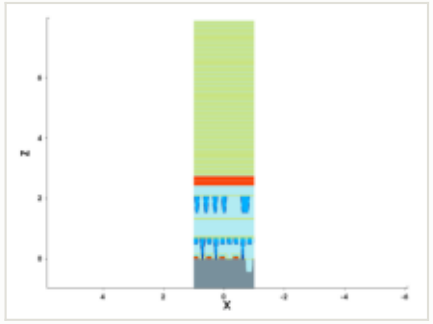

mask for this step

no mask for this step

steps by process area

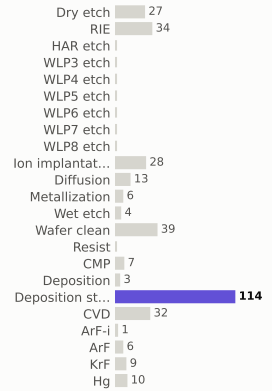

materials deposited (g)

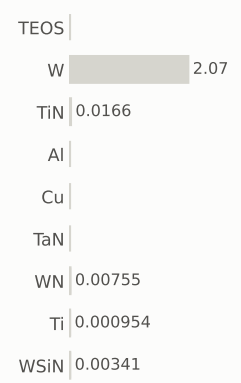

gases emitted (g)

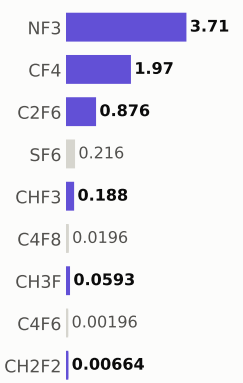

Step #4590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	330.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

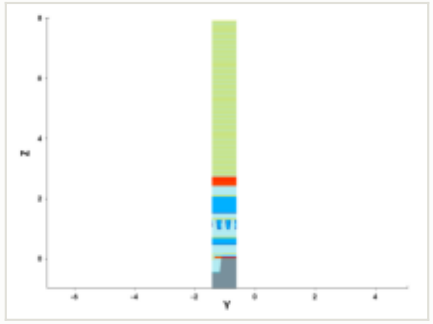

y cut at -1.035 µm

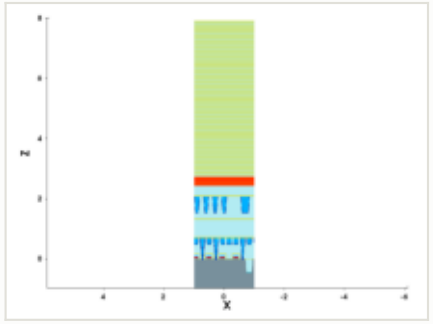

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

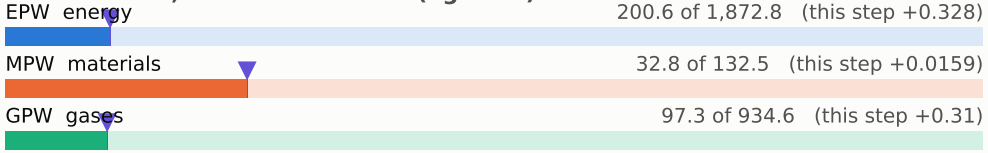

embodied carbon up to each step (kgCO2e per wafer)

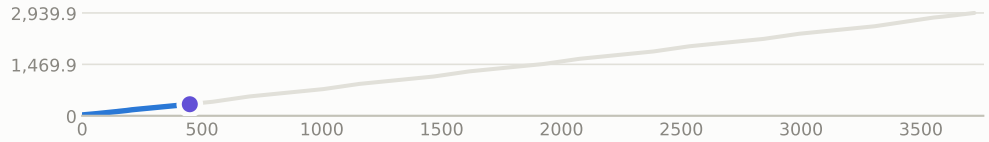

steps by process area

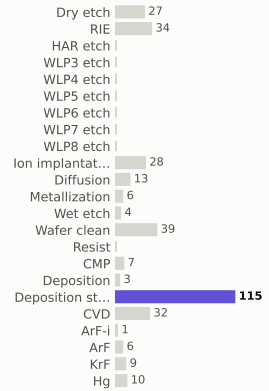

materials deposited (g)

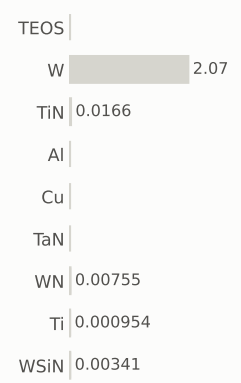

gases emitted (g)

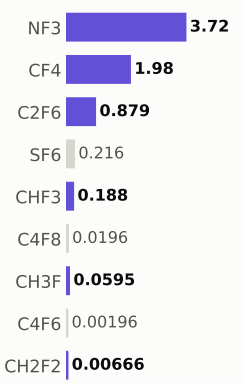

Step #4600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	331.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

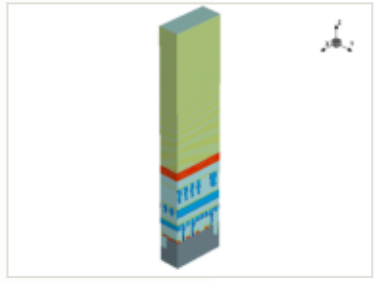

x cut at 0.000 µm

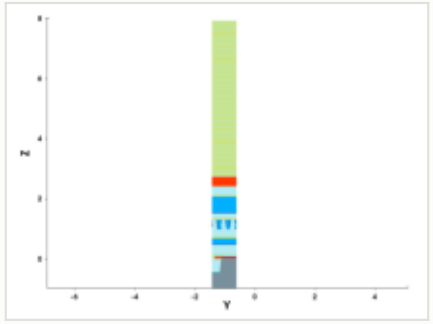

y cut at -1.035 µm

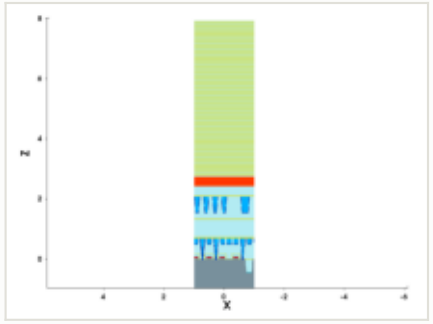

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

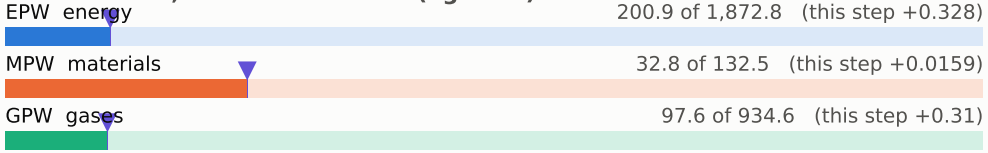

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

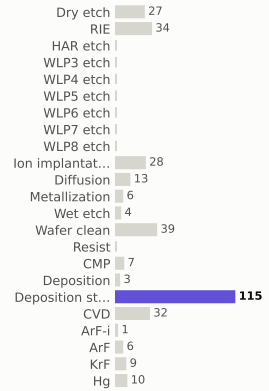

materials deposited (g)

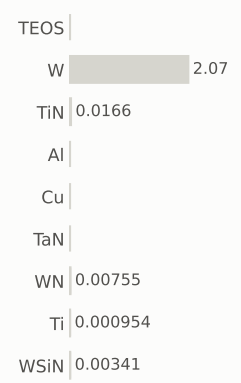

gases emitted (g)

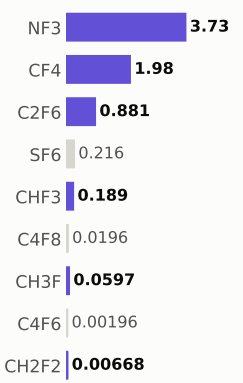

Step #4610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	331.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

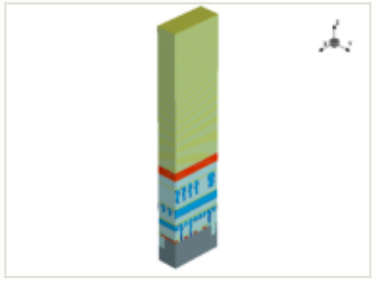

x cut at 0.000 µm

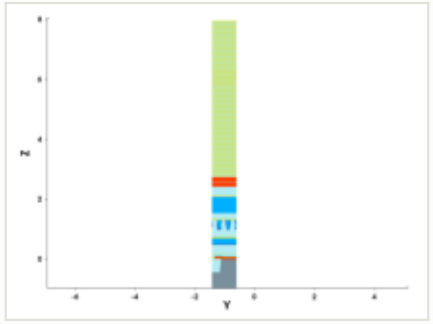

y cut at -1.035 µm

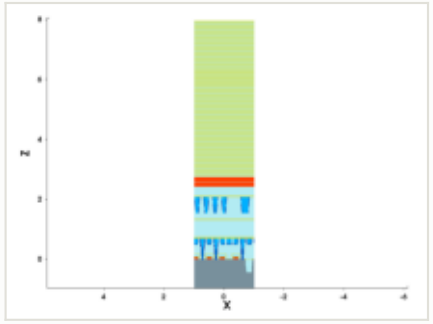

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

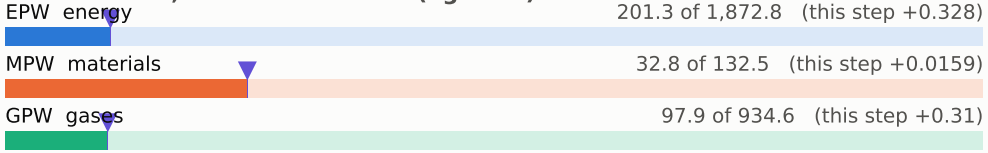

embodied carbon up to each step (kgCO2e per wafer)

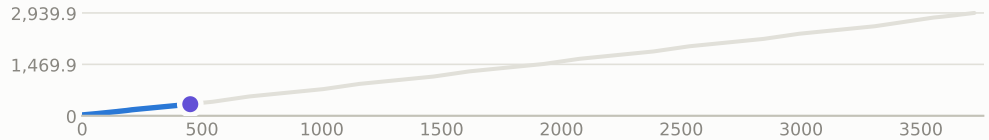

steps by process area

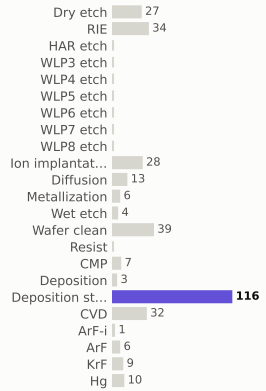

materials deposited (g)

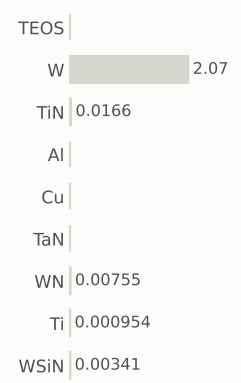

gases emitted (g)

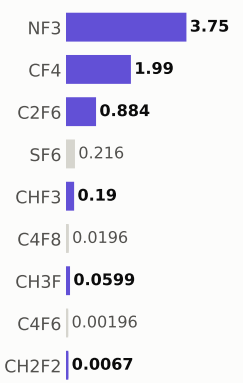

Step #4620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	332.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

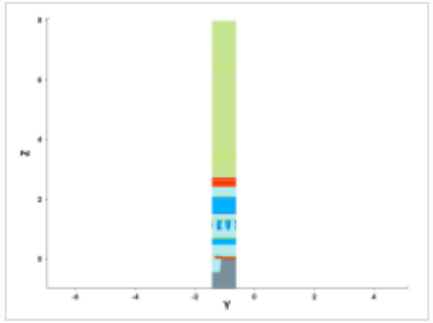

y cut at -1.035 µm

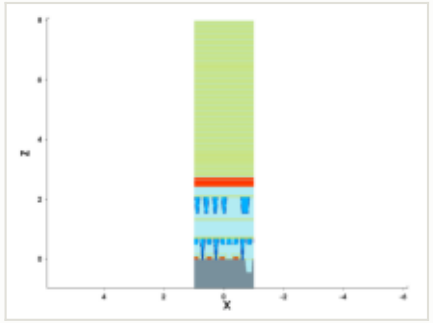

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

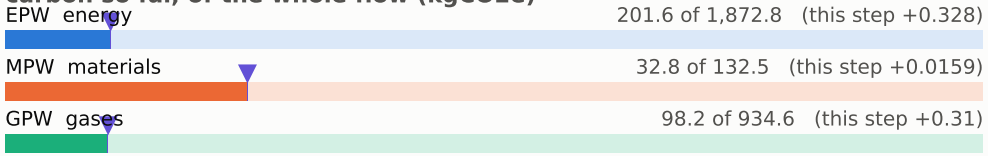

embodied carbon up to each step (kgCO2e per wafer)

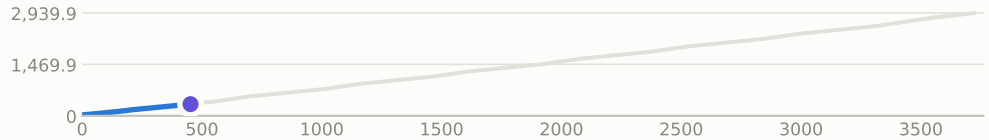

steps by process area

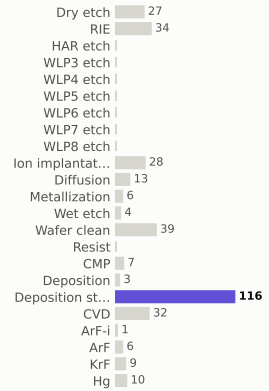

materials deposited (g)

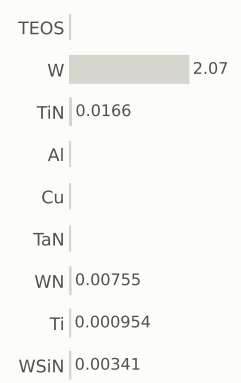

gases emitted (g)

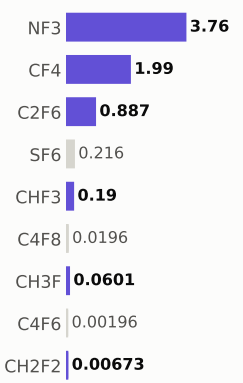

Step #4630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	333.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

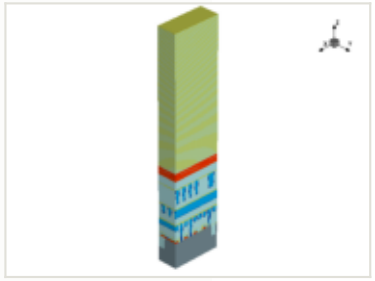

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

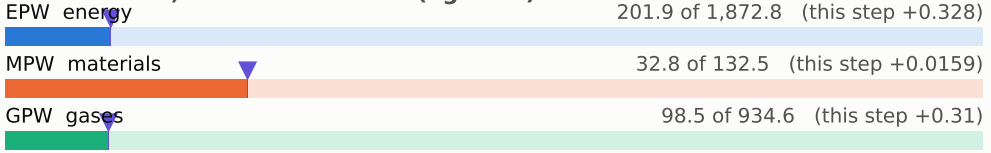

embodied carbon up to each step (kgCO2e per wafer)

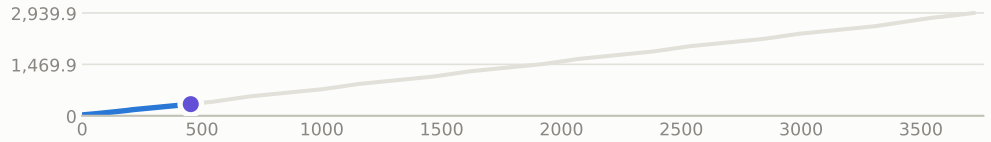

x cut at 0.000 µm

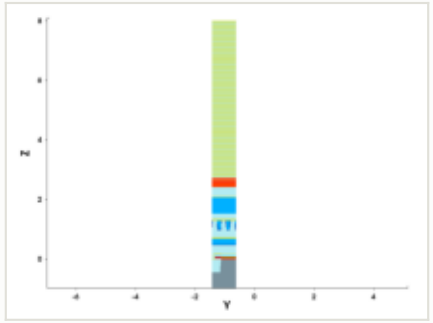

y cut at -1.035 µm

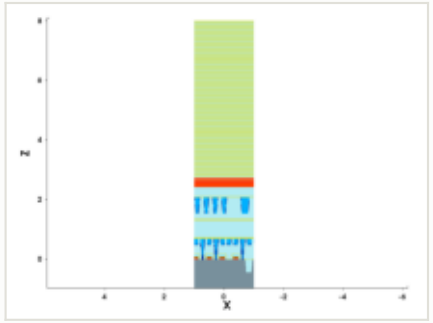

mask for this step

no mask for this step

steps by process area

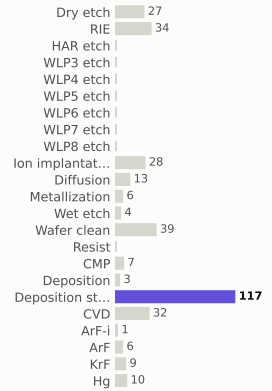

materials deposited (g)

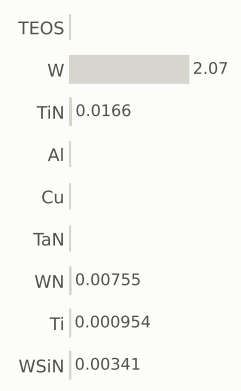

gases emitted (g)

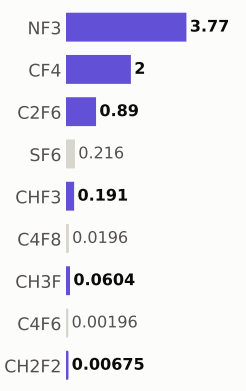

Step #4640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	333.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

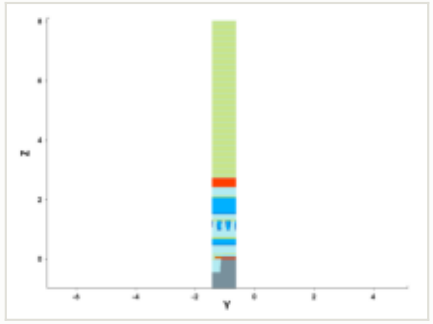

y cut at -1.035 µm

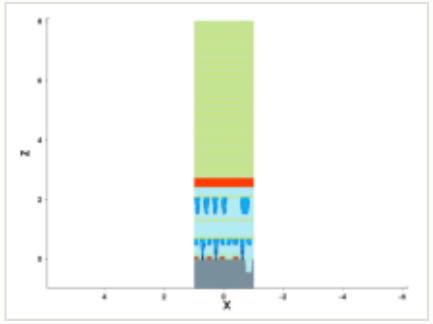

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

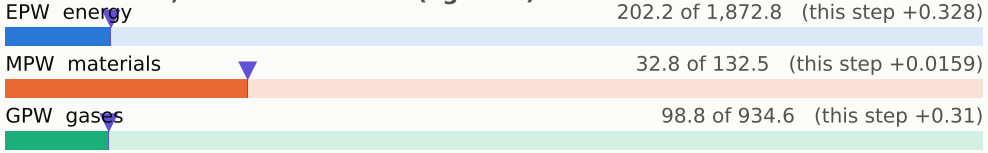

embodied carbon up to each step (kgCO2e per wafer)

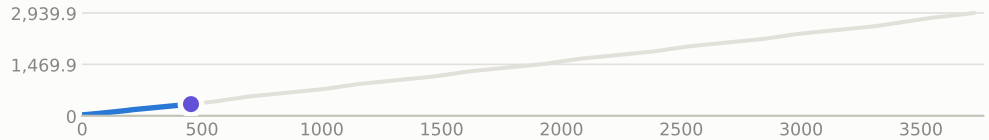

steps by process area

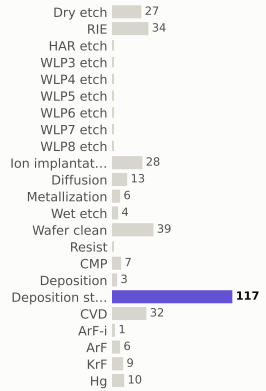

materials deposited (g)

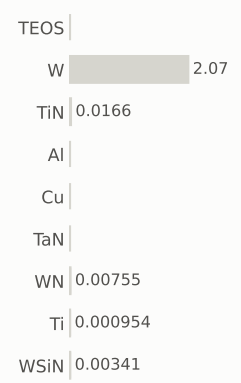

gases emitted (g)

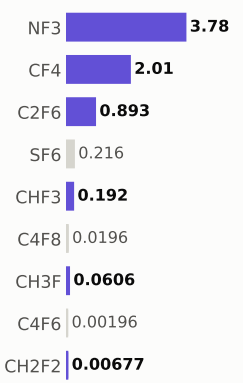

Step #4650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	334.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

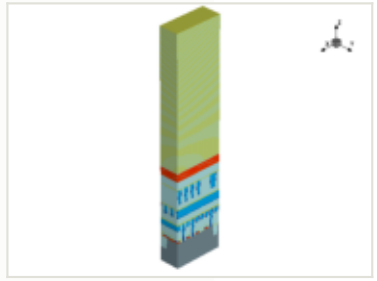

x cut at 0.000 µm

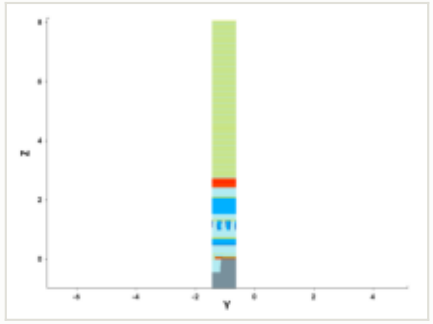

y cut at -1.035 µm

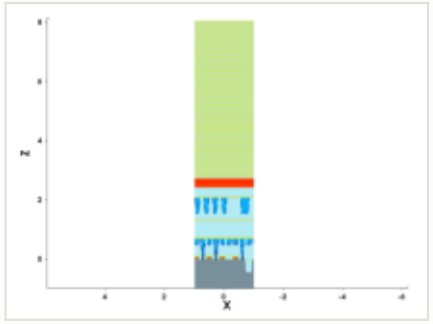

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

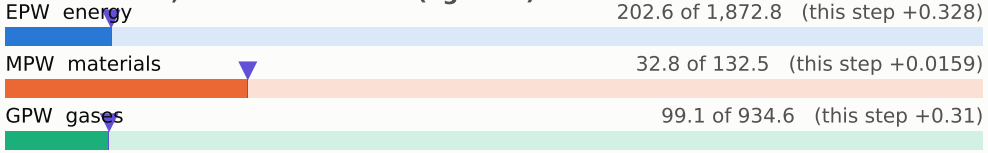

embodied carbon up to each step (kgCO2e per wafer)

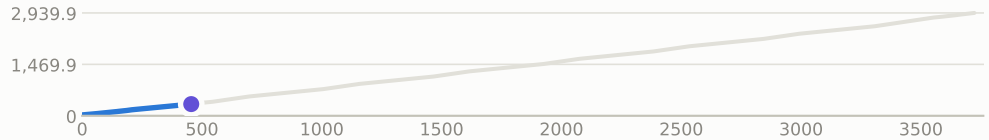

steps by process area

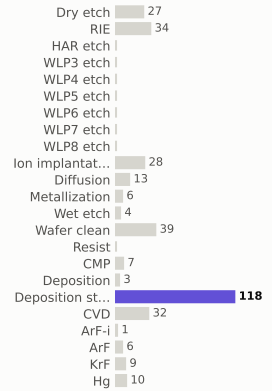

materials deposited (g)

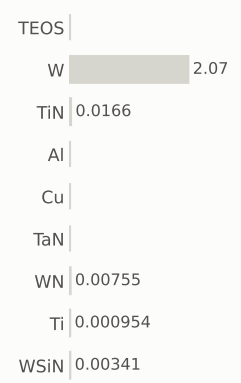

gases emitted (g)

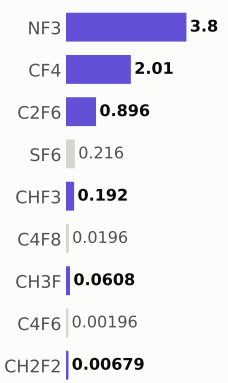

Step #4660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	335.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

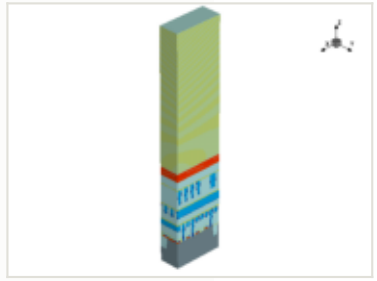

x cut at 0.000 µm

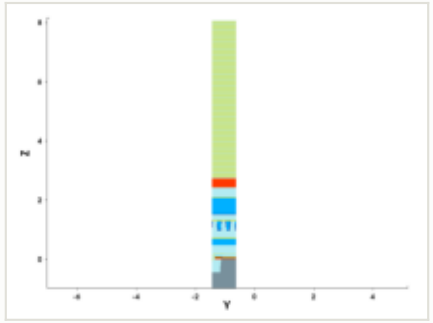

y cut at -1.035 µm

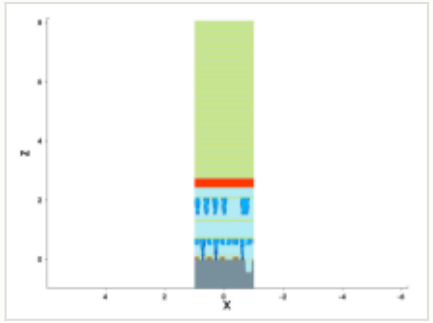

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

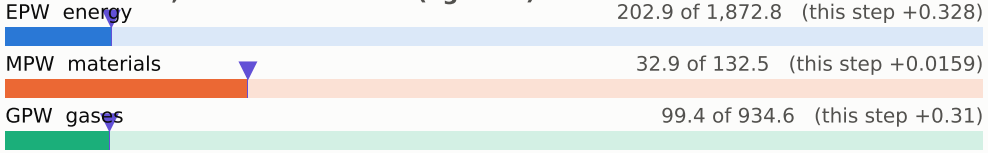

embodied carbon up to each step (kgCO2e per wafer)

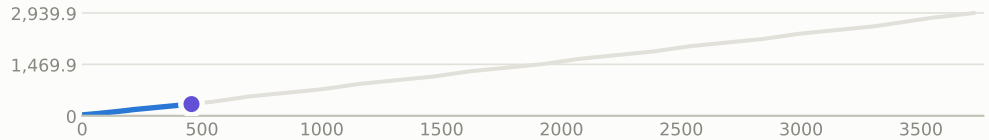

steps by process area

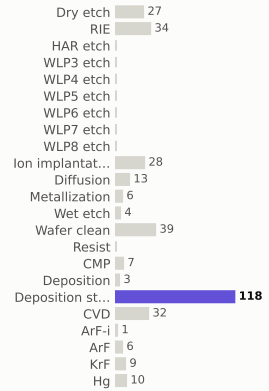

materials deposited (g)

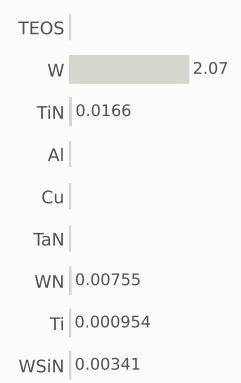

gases emitted (g)

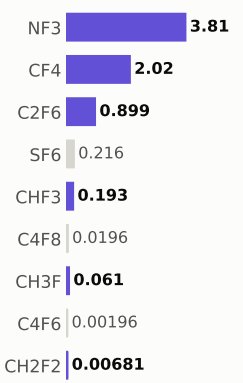

Step #4670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	335.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

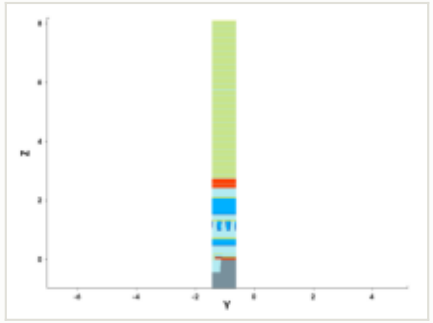

y cut at -1.035 µm

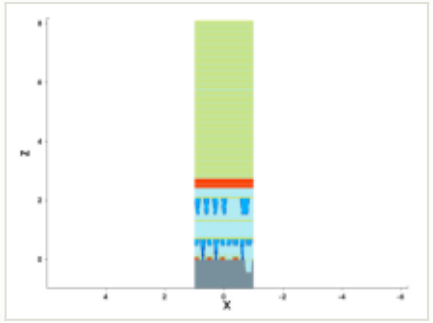

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

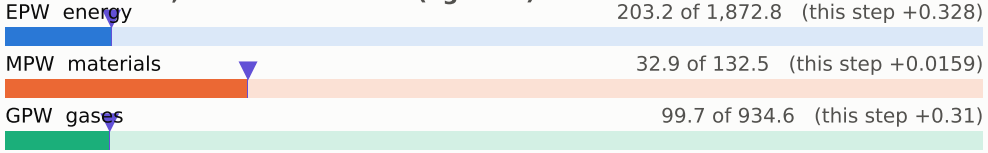

embodied carbon up to each step (kgCO2e per wafer)

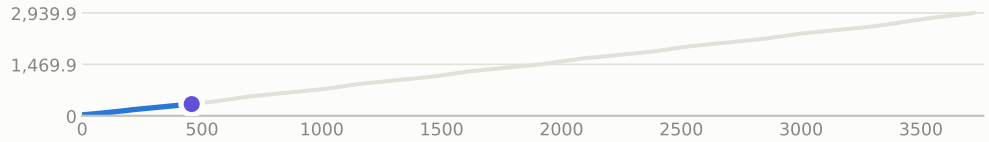

steps by process area

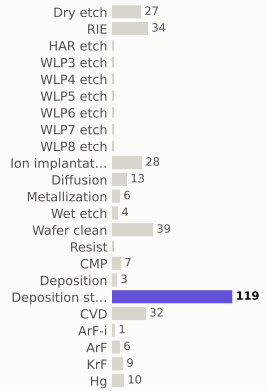

materials deposited (g)

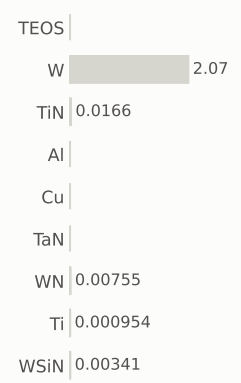

gases emitted (g)

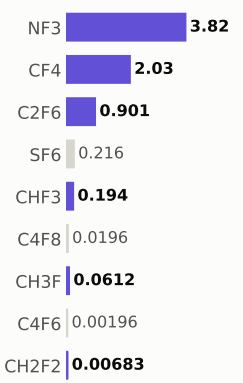

Step #4680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	336.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

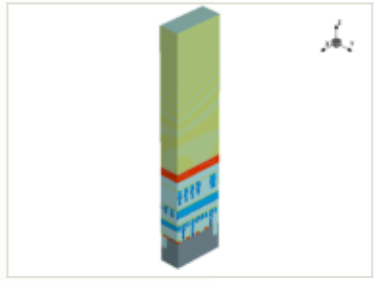

x cut at 0.000 µm

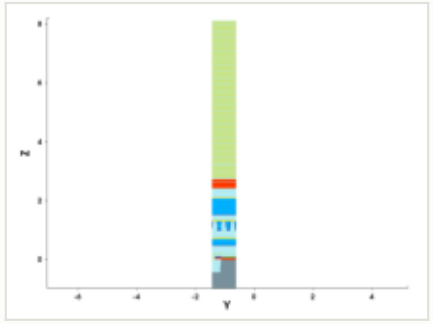

y cut at -1.035 µm

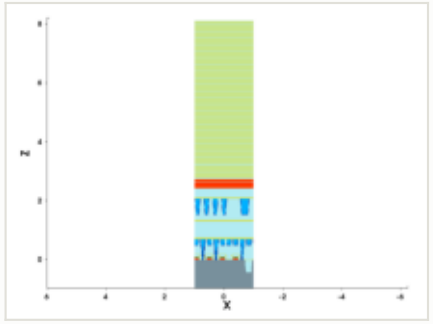

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 203.6 of 1,872.8 (this step +0.328)

MPW materials — 32.9 of 132.5 (this step +0.0159)

GPW gases — 100.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)

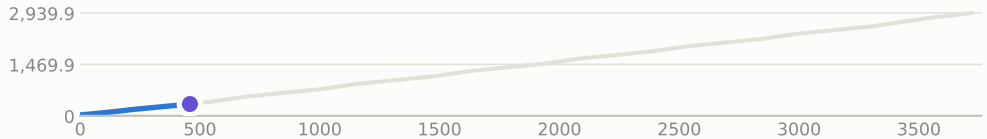

steps by process area



materials deposited (g)

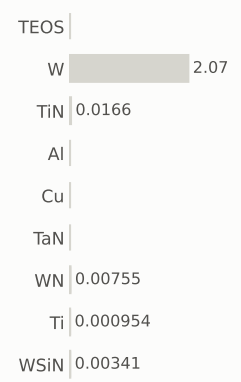

gases emitted (g)

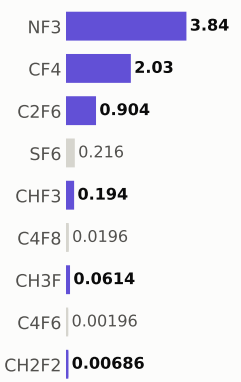

Step #4690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	337.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

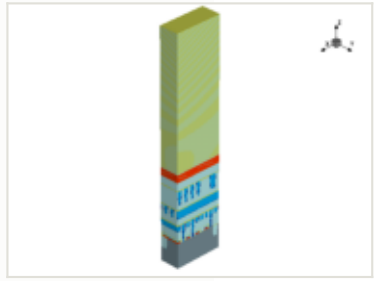

x cut at 0.000 µm

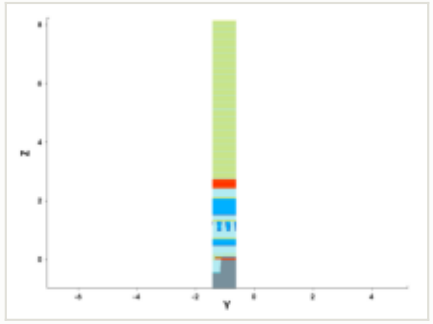

y cut at -1.035 µm

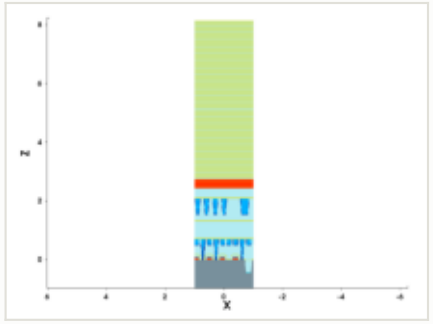

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

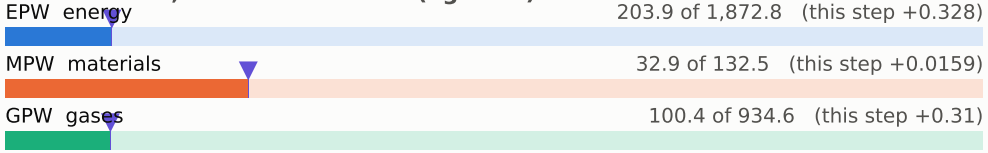

embodied carbon up to each step (kgCO2e per wafer)

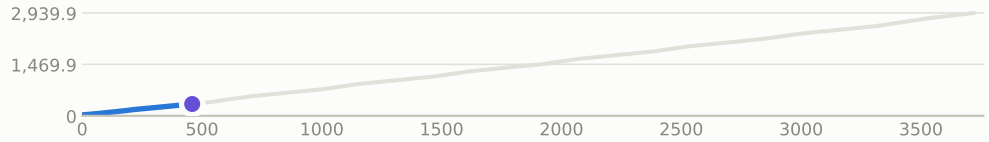

steps by process area

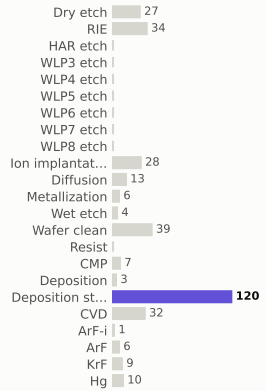

materials deposited (g)

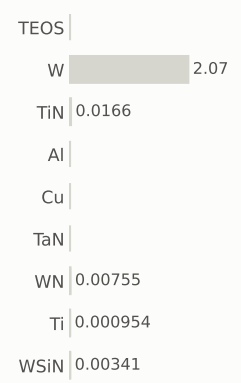

gases emitted (g)

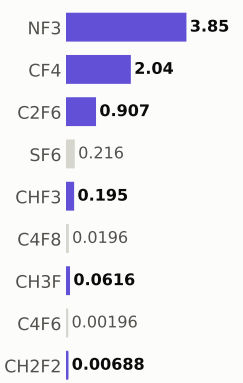

Step #4700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	337.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

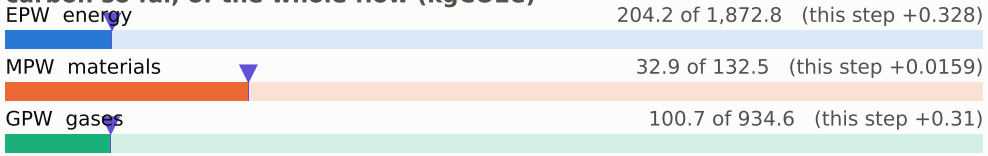

embodied carbon up to each step (kgCO2e per wafer)

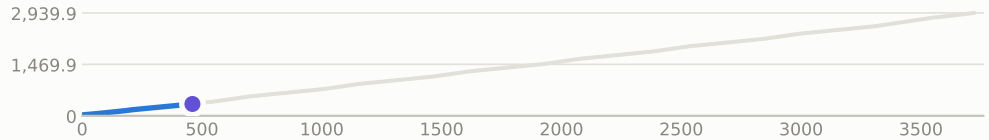

x cut at 0.000 µm

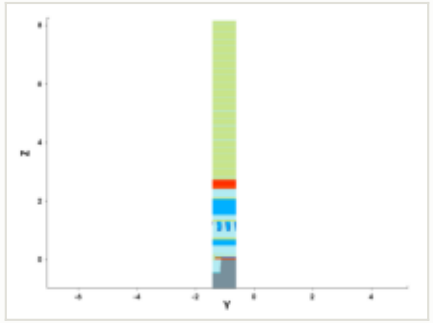

y cut at -1.035 µm

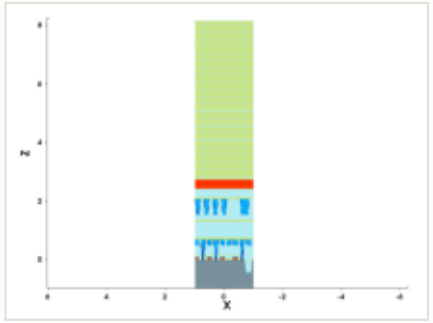

mask for this step

no mask for this step

steps by process area

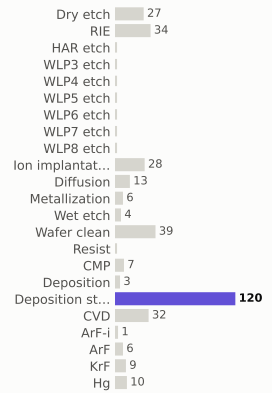

materials deposited (g)

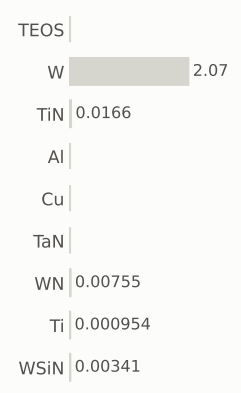

gases emitted (g)

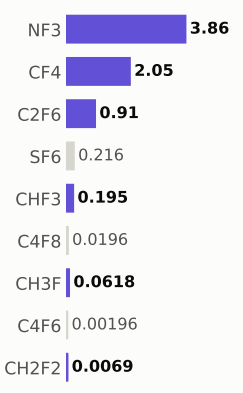

Step #4710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	338.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

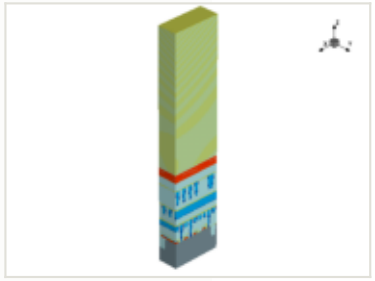

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

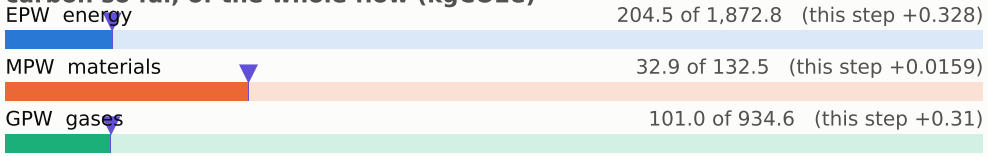

embodied carbon up to each step (kgCO2e per wafer)

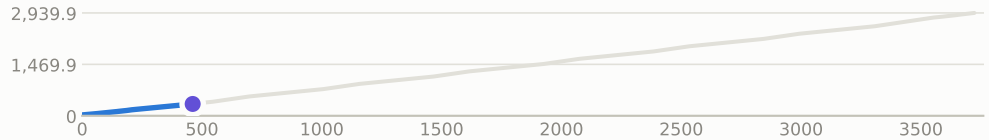

x cut at 0.000 µm

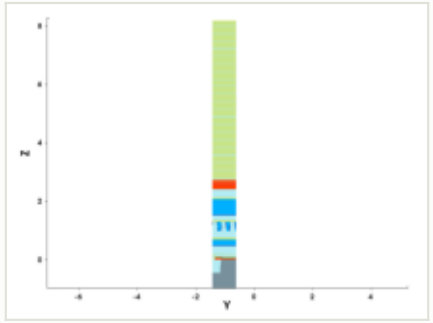

y cut at -1.035 µm

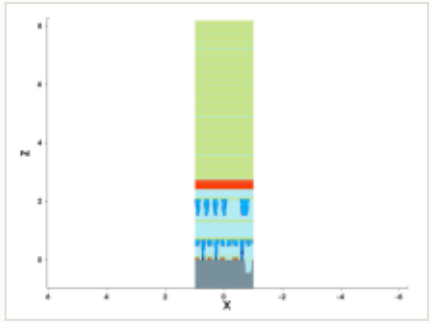

mask for this step

no mask for this step

steps by process area

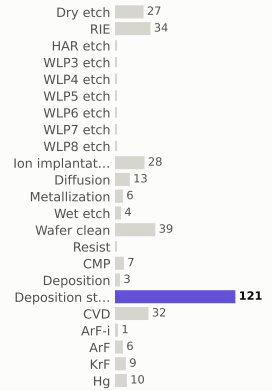

materials deposited (g)

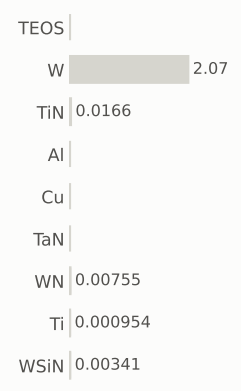

gases emitted (g)

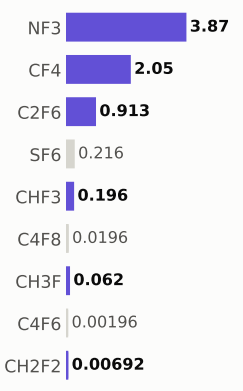

Step #4720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	339.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

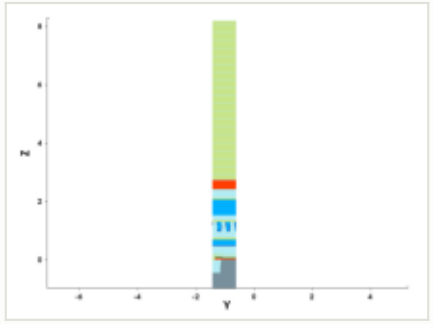

y cut at -1.035 µm

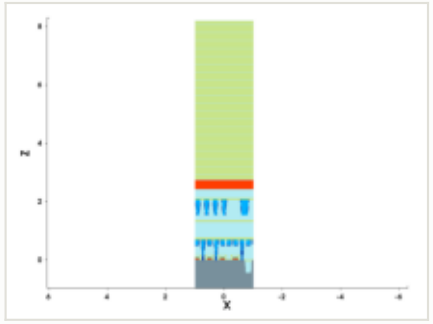

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

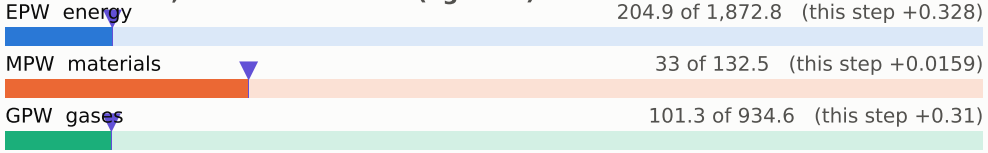

embodied carbon up to each step (kgCO2e per wafer)

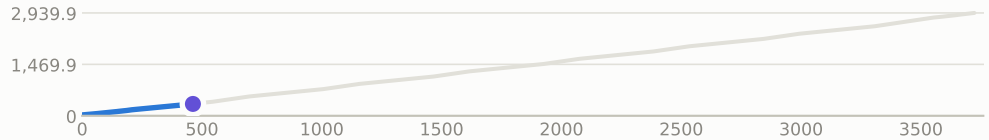

steps by process area

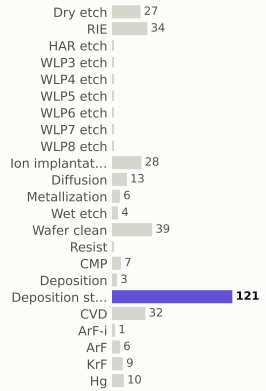

materials deposited (g)

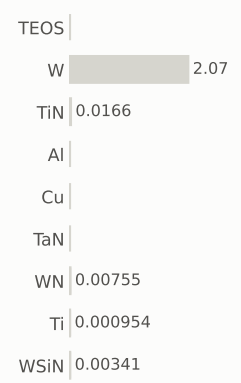

gases emitted (g)

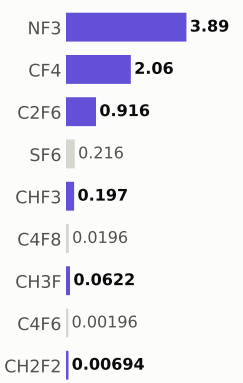

Step #4730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	339.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

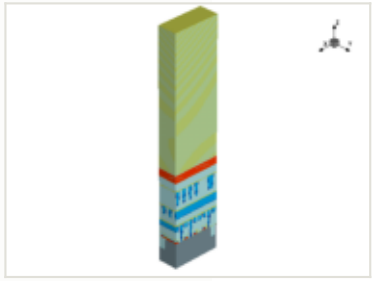

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

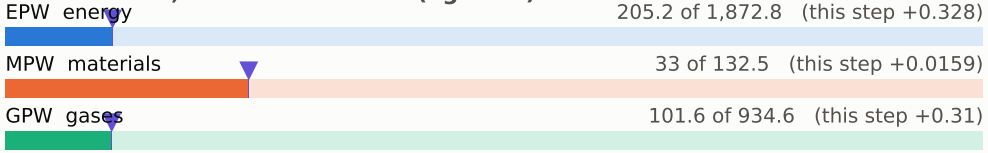

embodied carbon up to each step (kgCO2e per wafer)

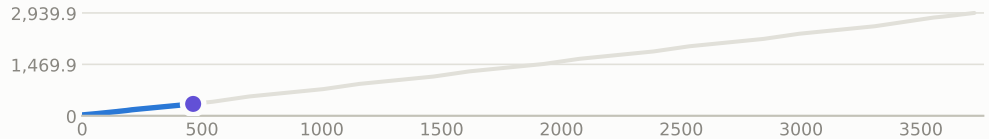

x cut at 0.000 µm

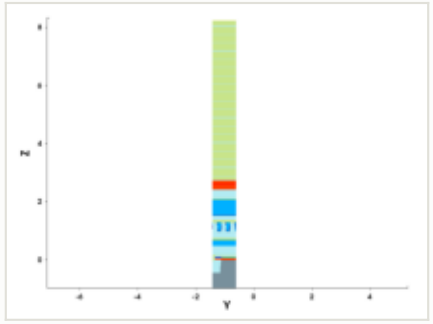

y cut at -1.035 µm

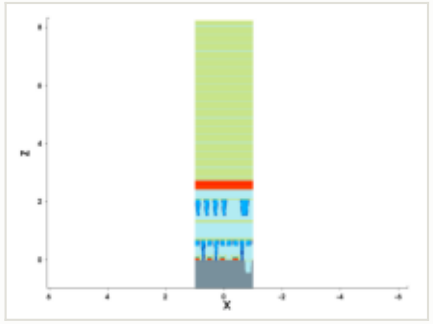

mask for this step

no mask for this step

steps by process area

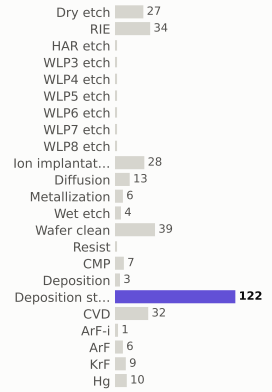

materials deposited (g)

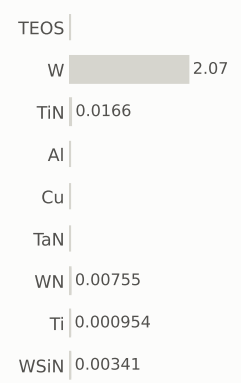

gases emitted (g)

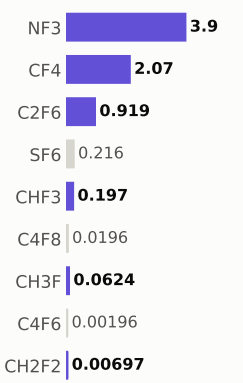

Step #4740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	340.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

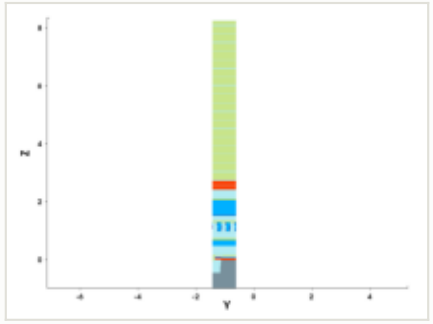

y cut at -1.035 µm

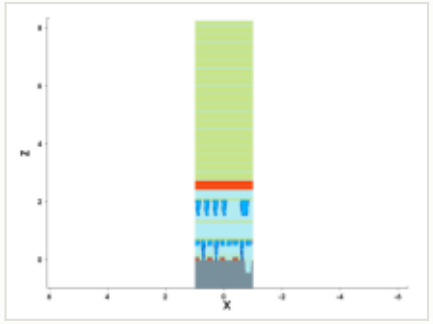

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

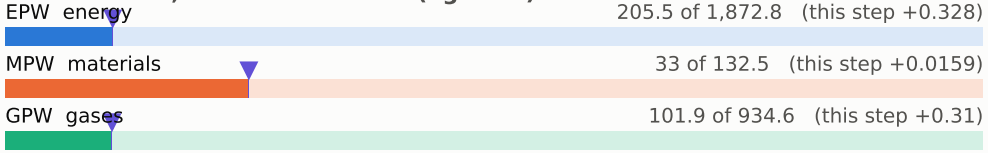

embodied carbon up to each step (kgCO2e per wafer)

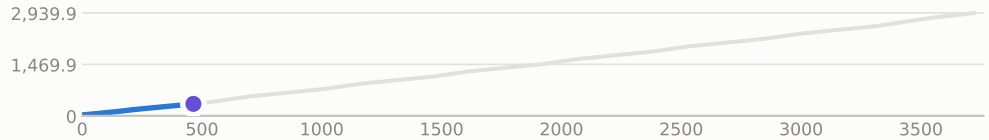

steps by process area

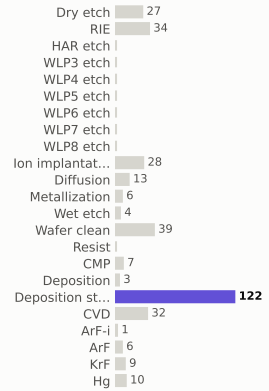

materials deposited (g)

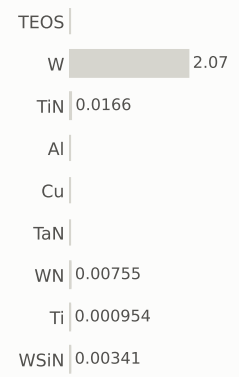

gases emitted (g)

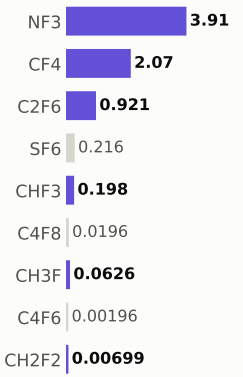

Step #4750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	341.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

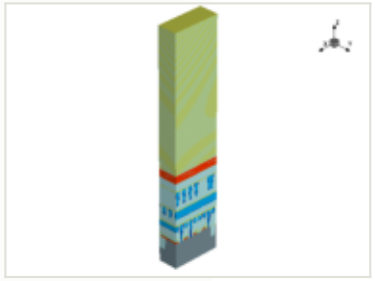

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

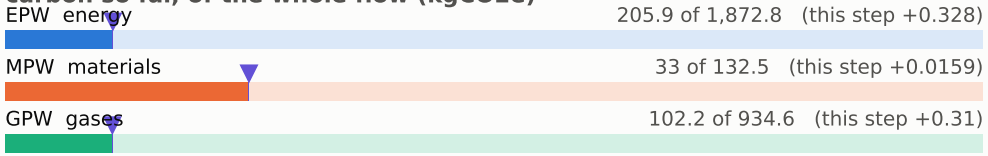

embodied carbon up to each step (kgCO2e per wafer)

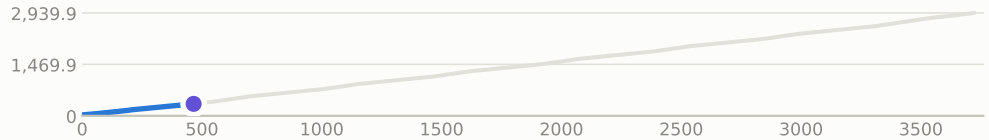

x cut at 0.000 µm

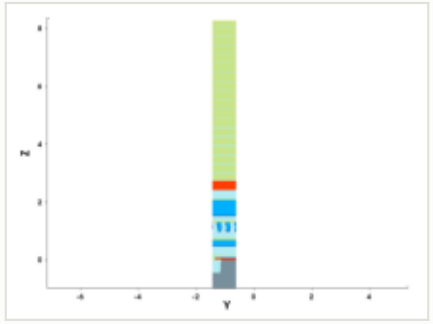

y cut at -1.035 µm

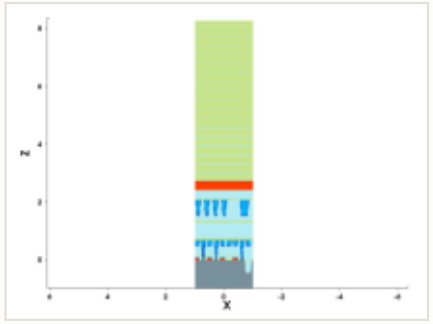

mask for this step

no mask for this step

steps by process area

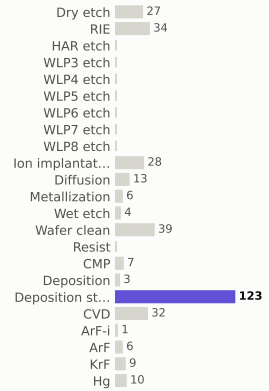

materials deposited (g)

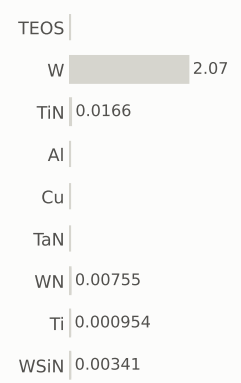

gases emitted (g)

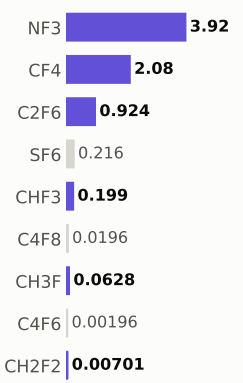

Step #4760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	341.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

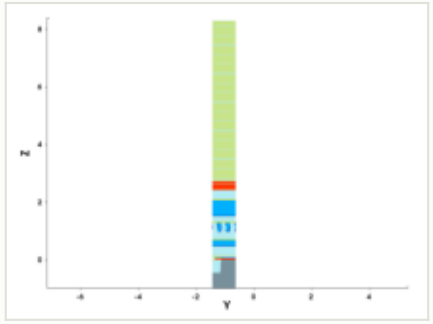

y cut at -1.035 µm

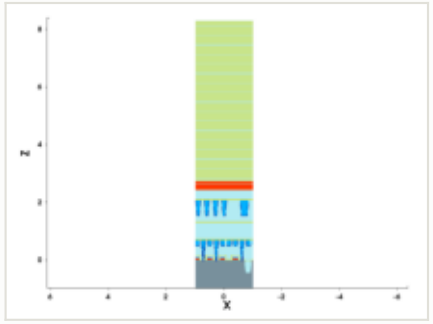

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

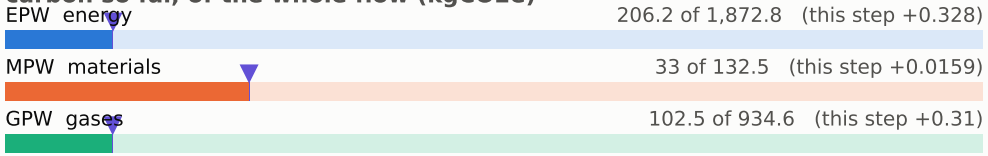

embodied carbon up to each step (kgCO2e per wafer)

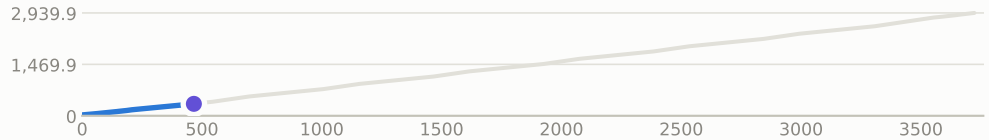

steps by process area

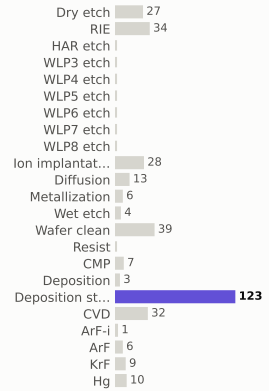

materials deposited (g)

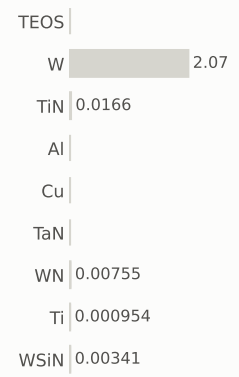

gases emitted (g)

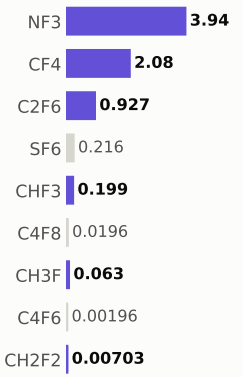

Step #4770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	342.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

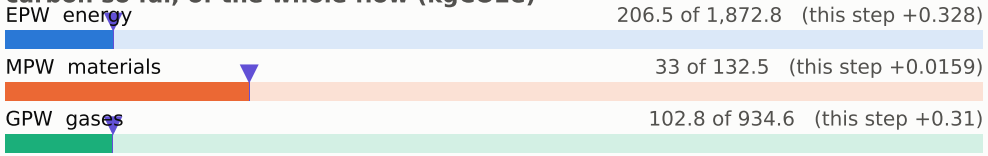

embodied carbon up to each step (kgCO2e per wafer)

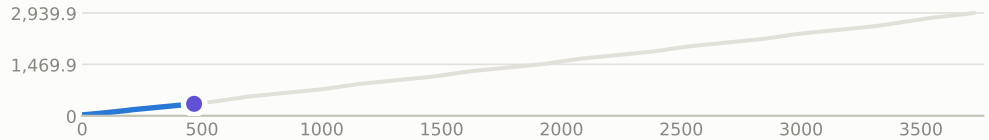

x cut at 0.000 µm

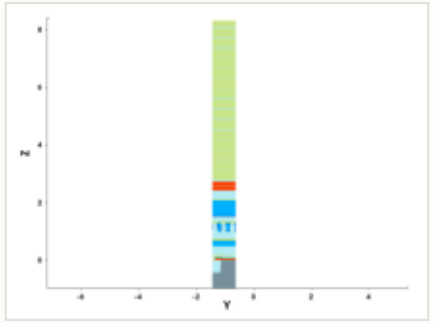

y cut at -1.035 µm

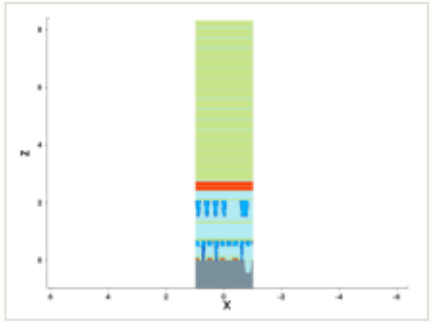

mask for this step

no mask for this step

steps by process area

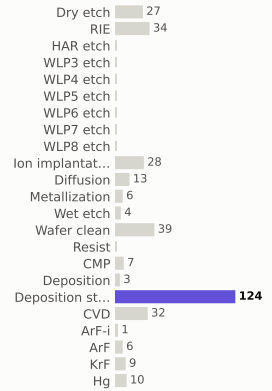

materials deposited (g)

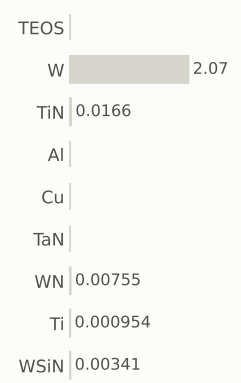

gases emitted (g)

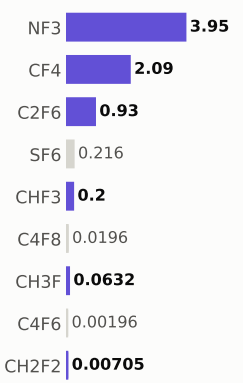

Step #4780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	343.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

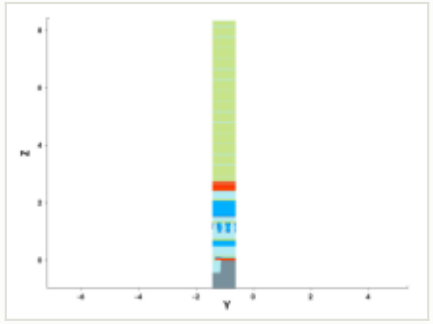

y cut at -1.035 µm

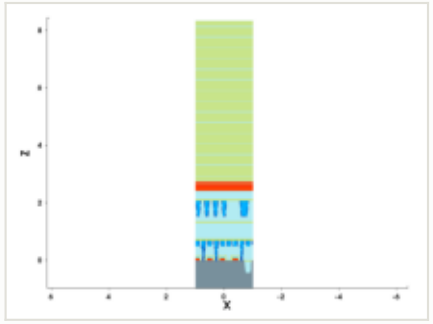

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

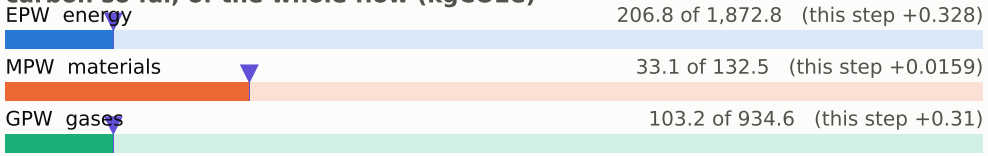

embodied carbon up to each step (kgCO2e per wafer)

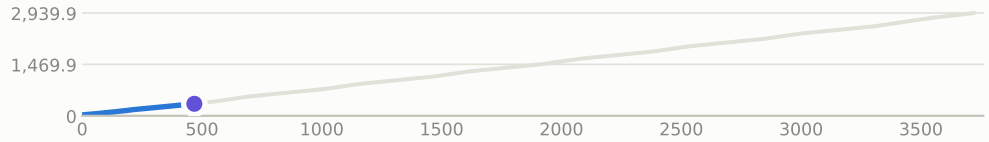

steps by process area

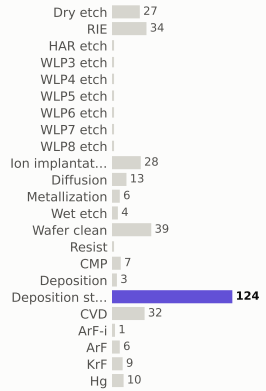

materials deposited (g)

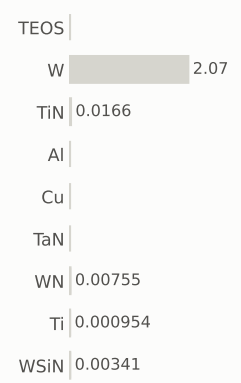

gases emitted (g)

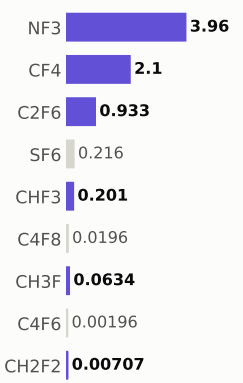

Step #4790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	343.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

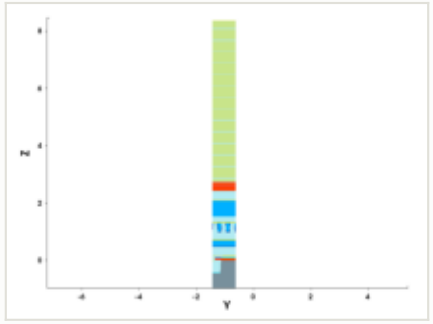

y cut at -1.035 µm

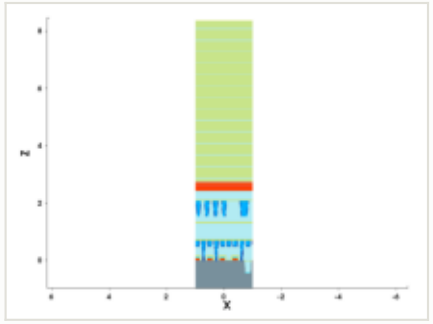

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

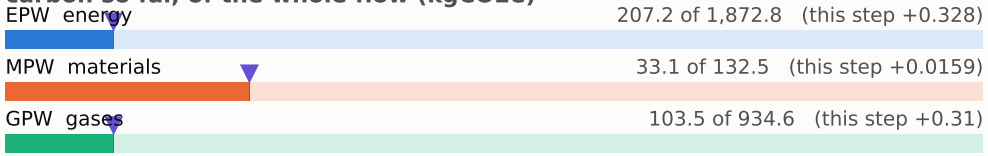

embodied carbon up to each step (kgCO2e per wafer)

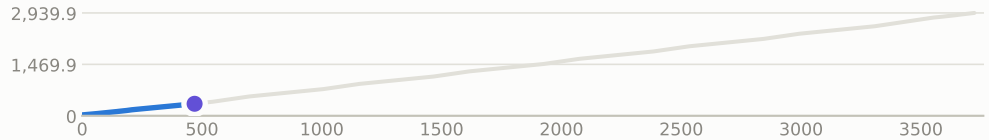

steps by process area

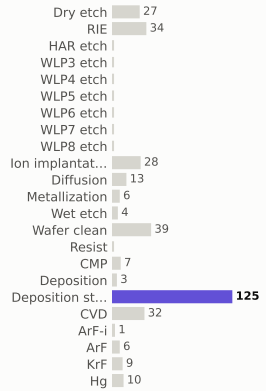

materials deposited (g)

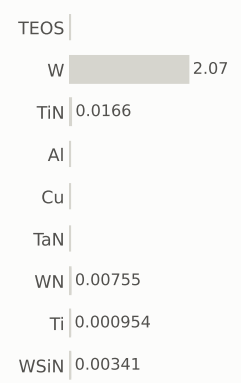

gases emitted (g)

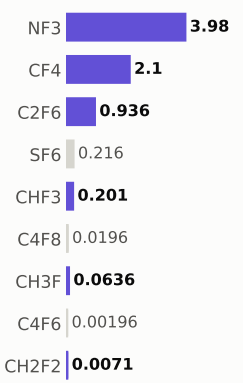

Step #4800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	344.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

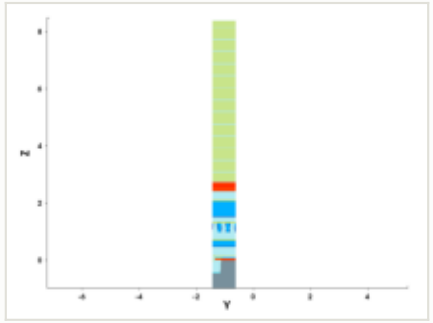

y cut at -1.035 µm

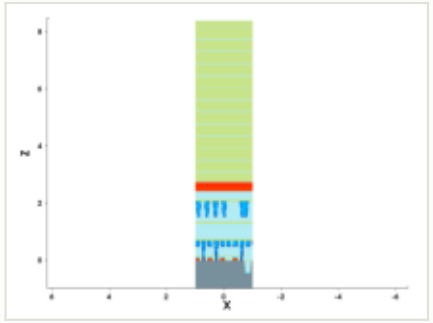

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

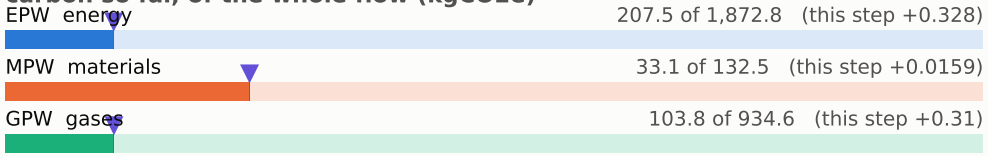

embodied carbon up to each step (kgCO2e per wafer)

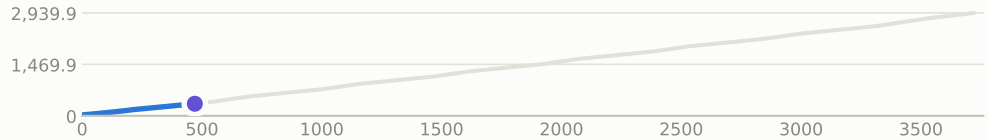

steps by process area

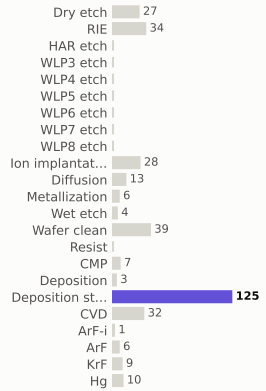

materials deposited (g)

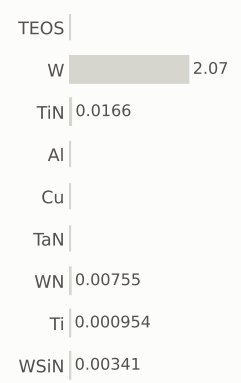

gases emitted (g)

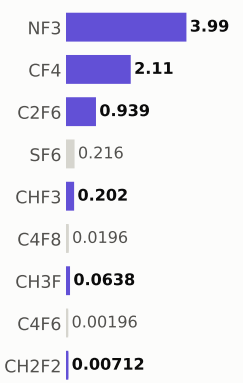

Step #4810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	345.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

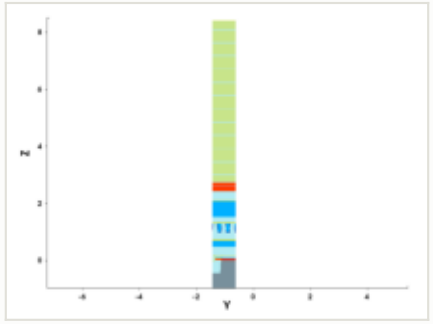

y cut at -1.035 µm

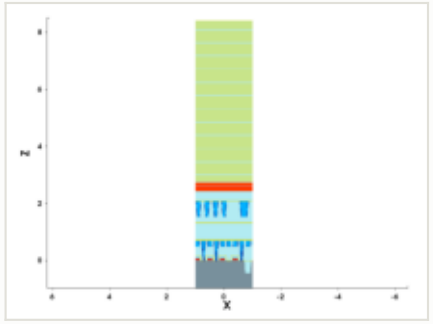

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

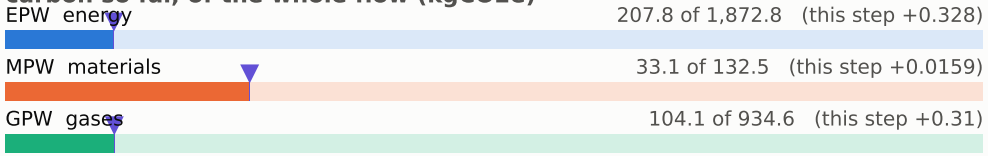

embodied carbon up to each step (kgCO2e per wafer)

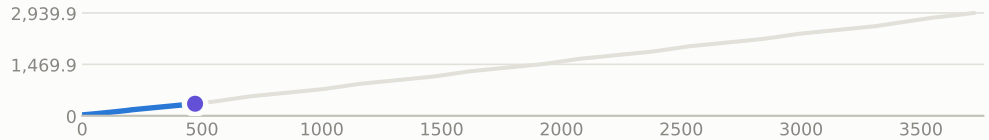

steps by process area

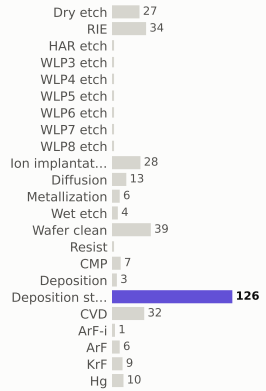

materials deposited (g)

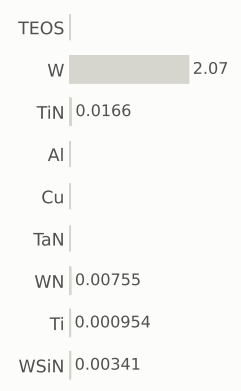

gases emitted (g)



Step #4820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	345.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

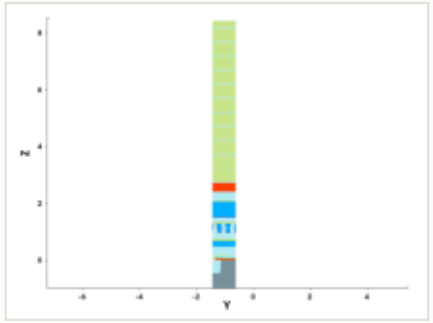

y cut at -1.035 µm

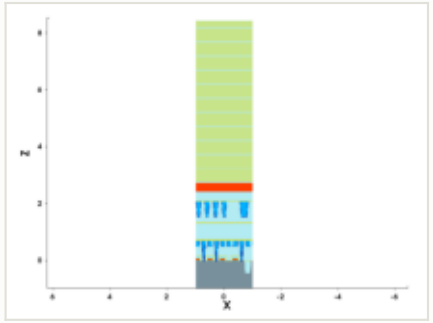

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

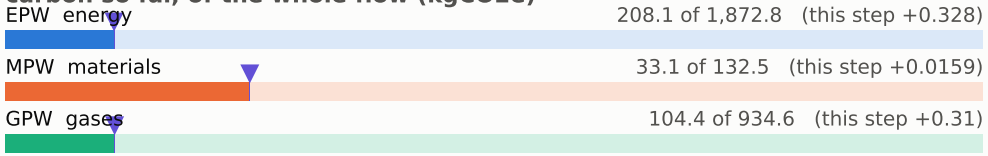

embodied carbon up to each step (kgCO2e per wafer)

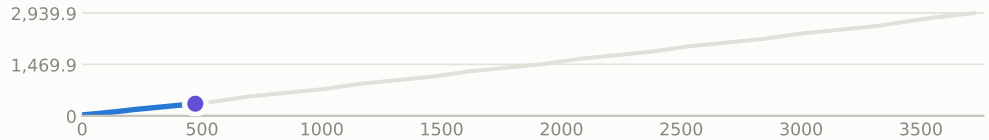

steps by process area

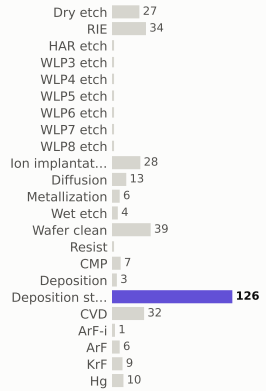

materials deposited (g)

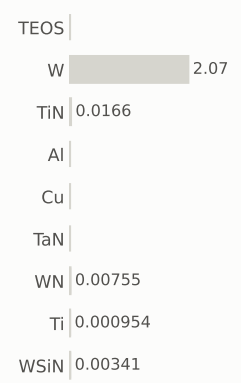

gases emitted (g)

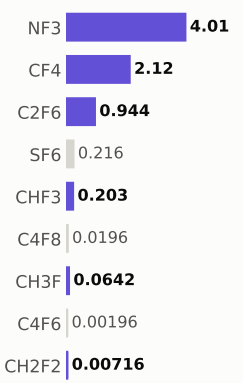

Step #4830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	346.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

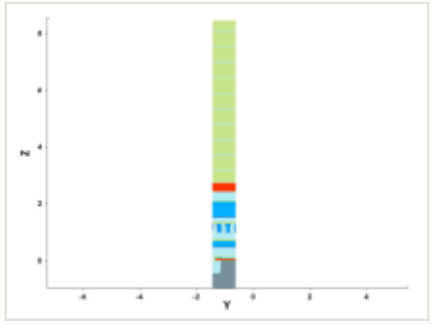

y cut at -1.035 µm

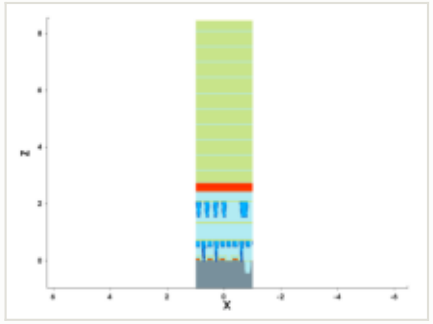

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

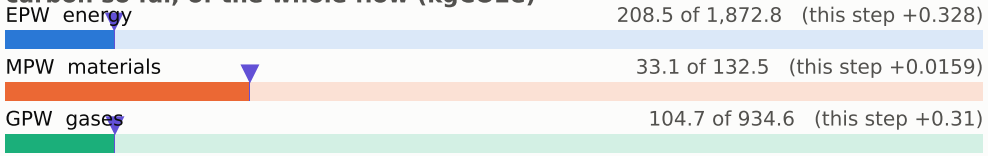

embodied carbon up to each step (kgCO2e per wafer)

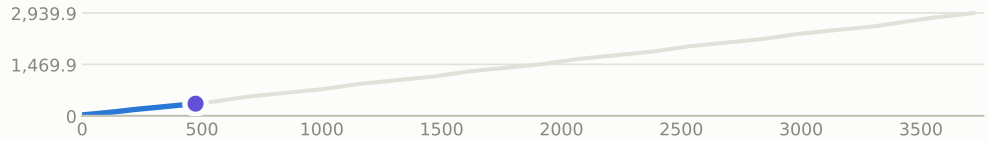

steps by process area

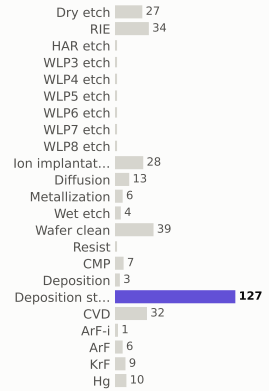

materials deposited (g)

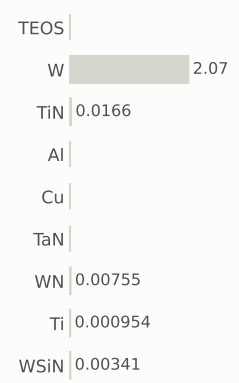

gases emitted (g)

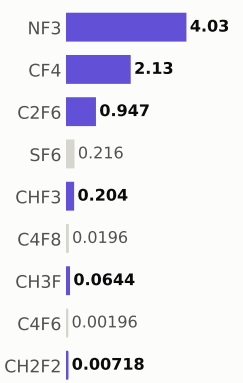

Step #4840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	347.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

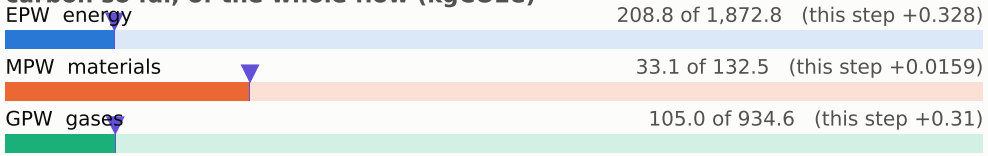

embodied carbon up to each step (kgCO2e per wafer)

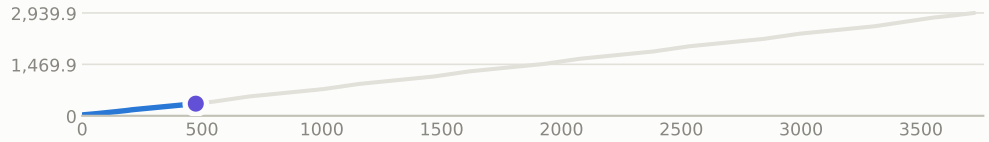

x cut at 0.000 µm

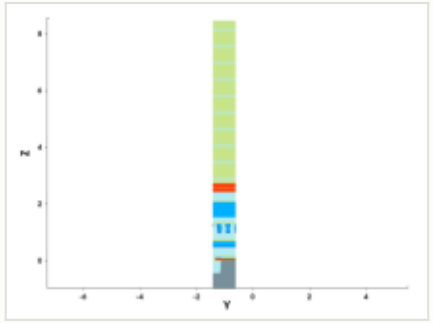

y cut at -1.035 µm

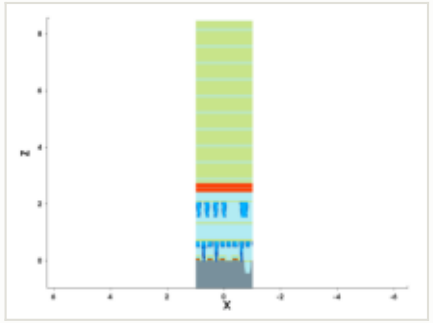

mask for this step

no mask for this step

steps by process area

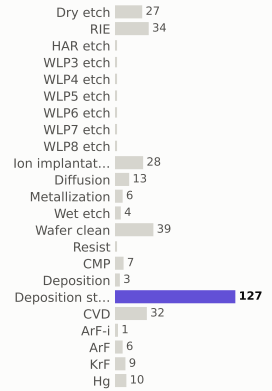

materials deposited (g)

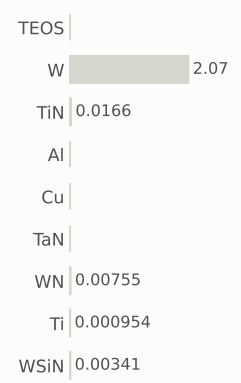

gases emitted (g)

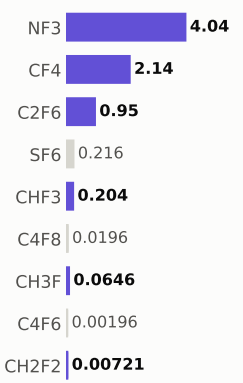

Step #4850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	347.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

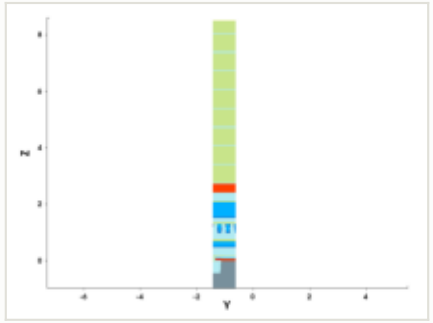

y cut at -1.035 µm

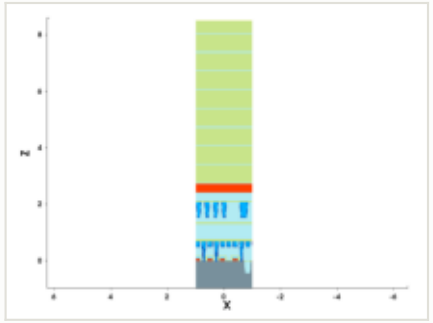

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

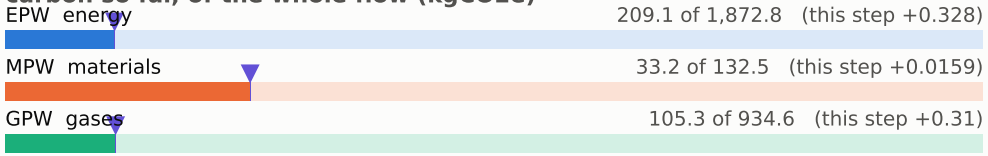

embodied carbon up to each step (kgCO2e per wafer)

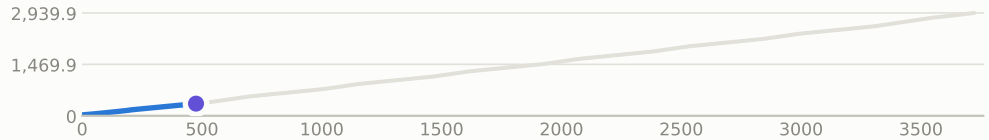

steps by process area

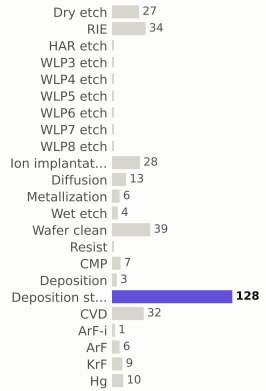

materials deposited (g)

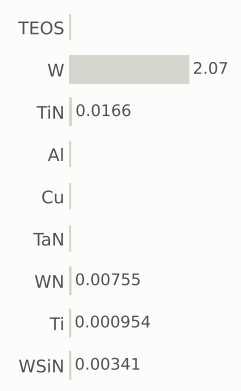

gases emitted (g)

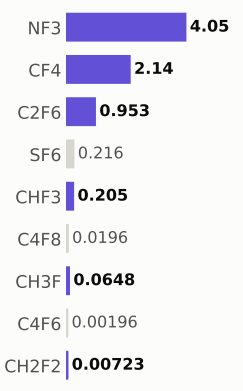

Step #4860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	348.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

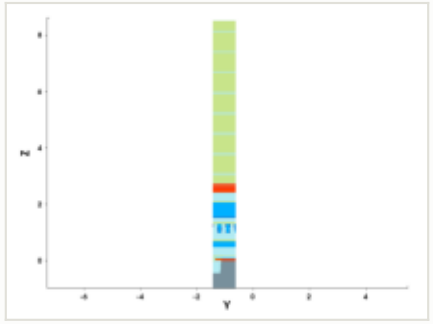

y cut at -1.035 µm

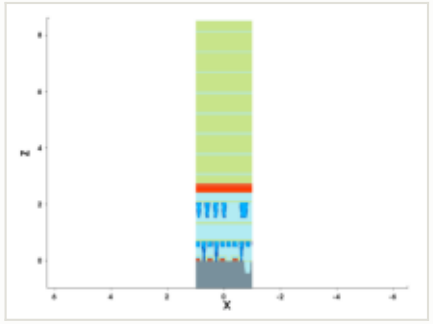

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

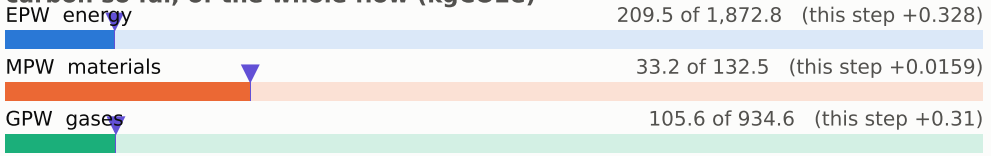

embodied carbon up to each step (kgCO2e per wafer)

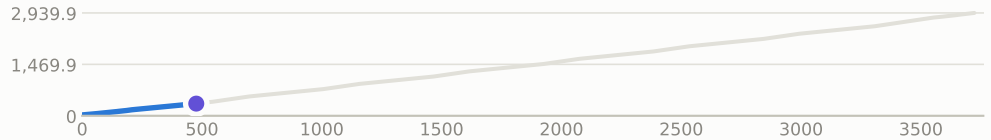

steps by process area

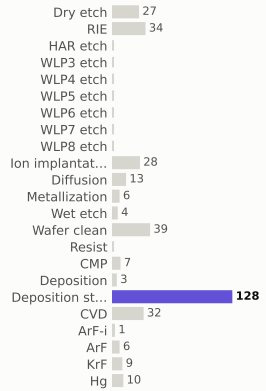

materials deposited (g)

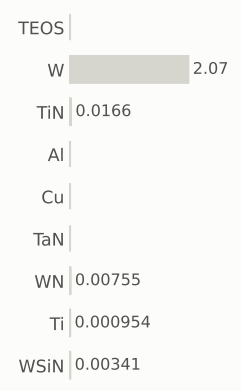

gases emitted (g)

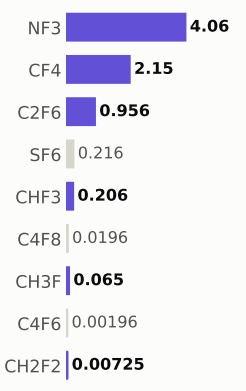

Step #4870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	348.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

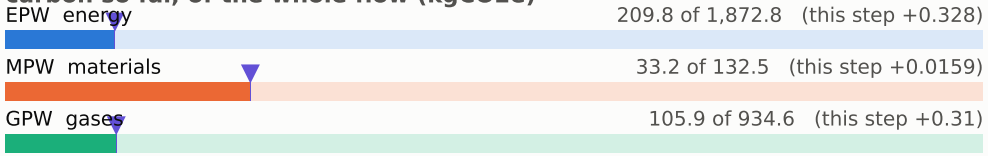

embodied carbon up to each step (kgCO2e per wafer)

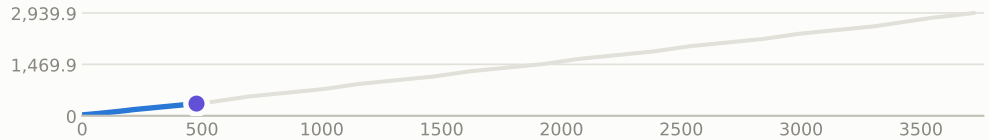

x cut at 0.000 µm

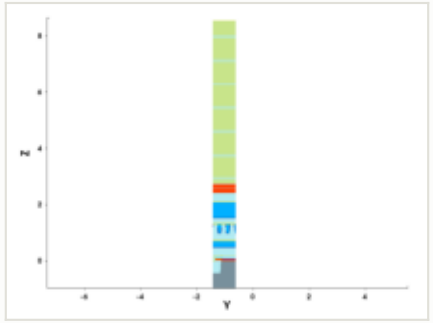

y cut at -1.035 µm

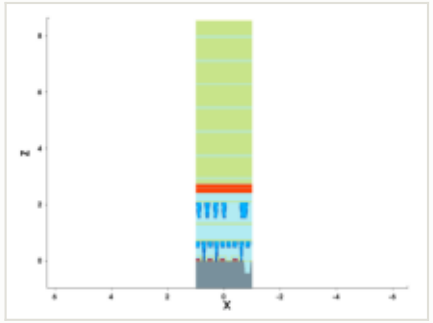

mask for this step

no mask for this step

steps by process area

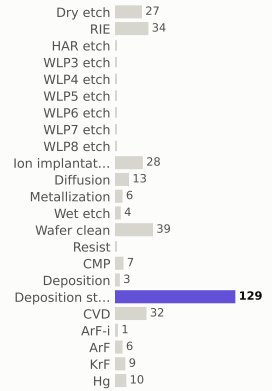

materials deposited (g)

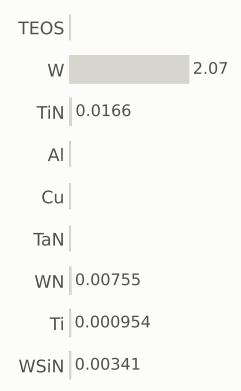

gases emitted (g)

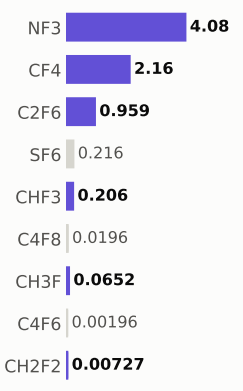

Step #4880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	349.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

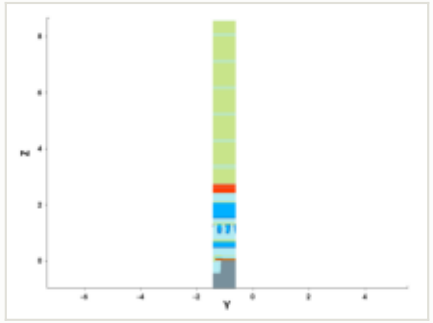

y cut at -1.035 µm

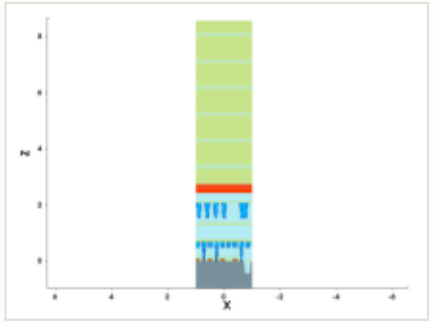

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

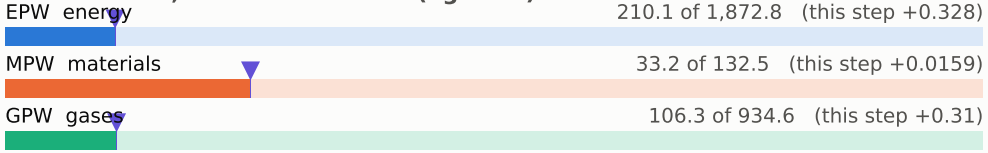

embodied carbon up to each step (kgCO2e per wafer)

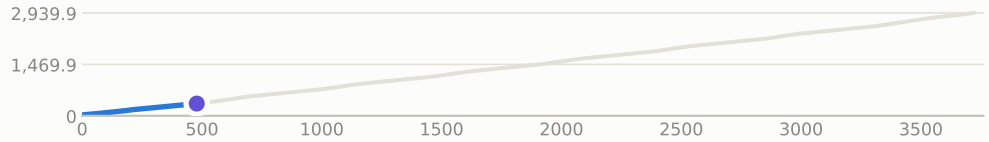

steps by process area

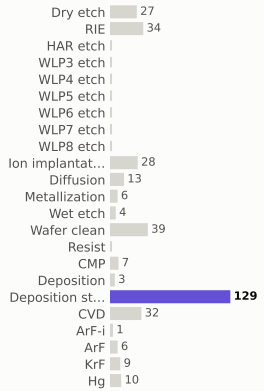

materials deposited (g)

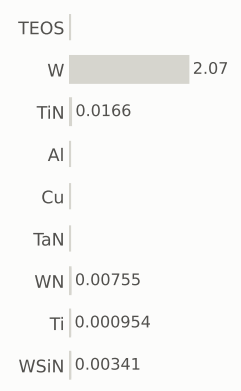

gases emitted (g)

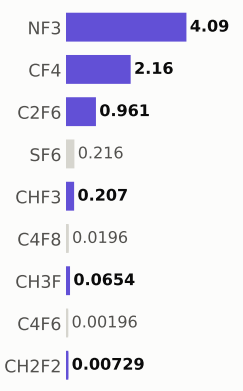

Step #4890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	350.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

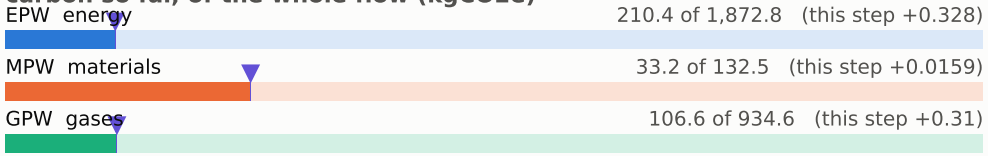

embodied carbon up to each step (kgCO2e per wafer)

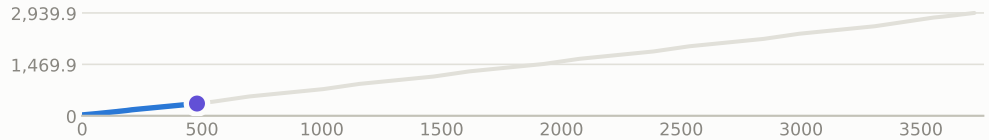

x cut at 0.000 µm

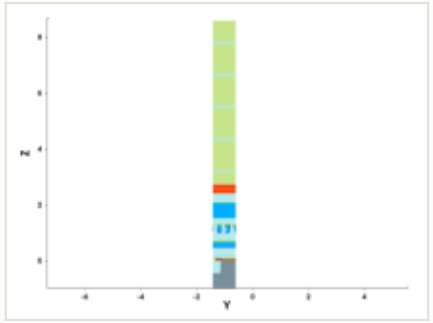

y cut at -1.035 µm

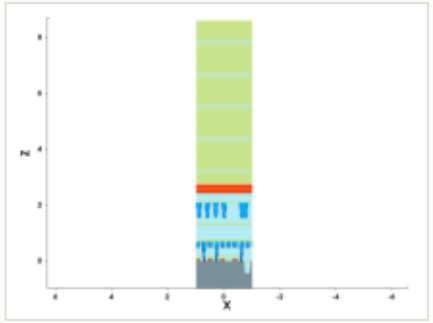

mask for this step

no mask for this step

steps by process area

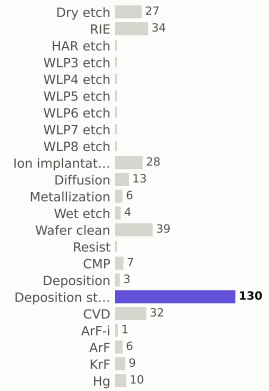

materials deposited (g)

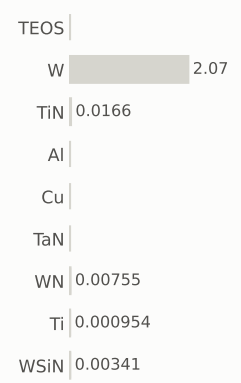

gases emitted (g)



Step #4900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	350.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

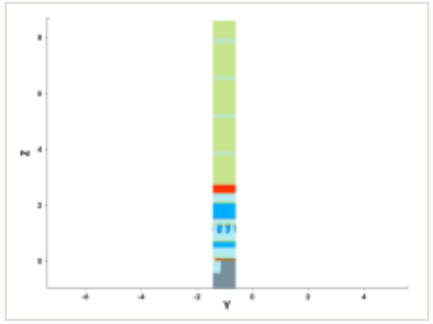

y cut at -1.035 µm

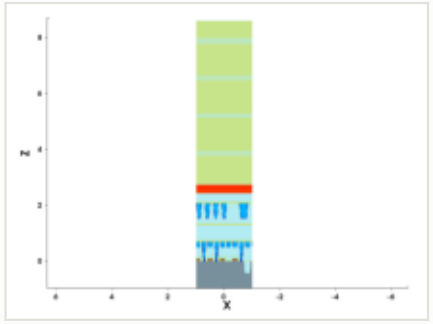

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

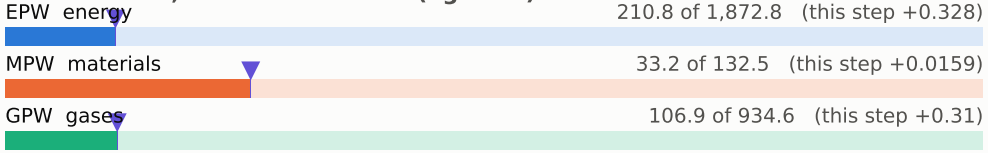

embodied carbon up to each step (kgCO2e per wafer)

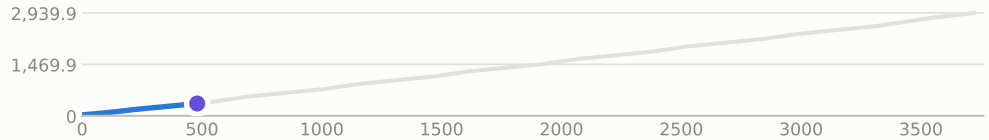

steps by process area

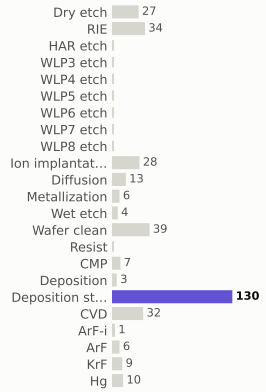

materials deposited (g)

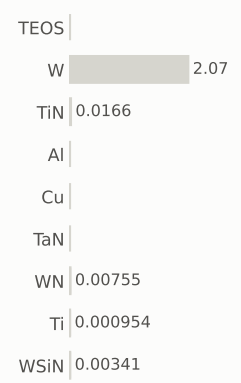

gases emitted (g)

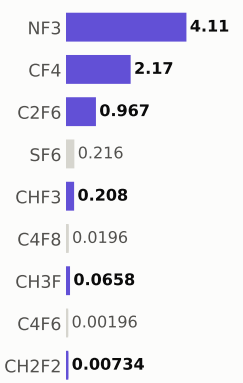

Step #4910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	351.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

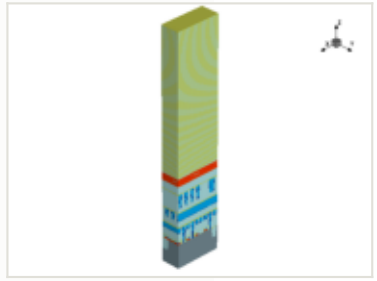

x cut at 0.000 µm

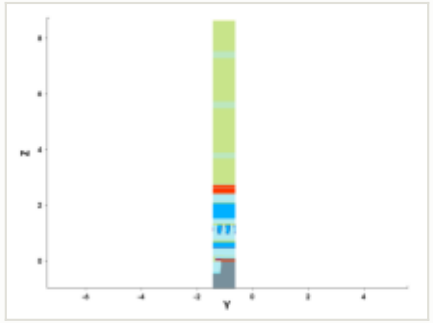

y cut at -1.035 µm

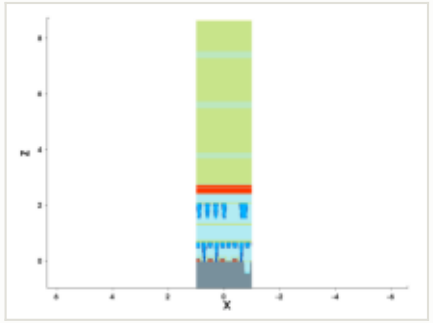

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

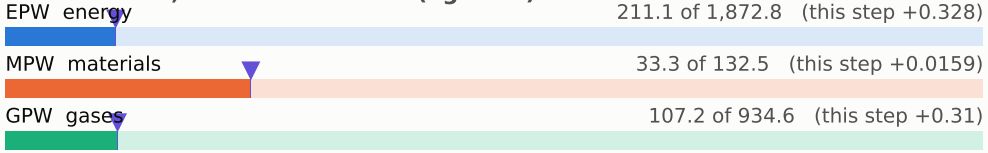

embodied carbon up to each step (kgCO2e per wafer)

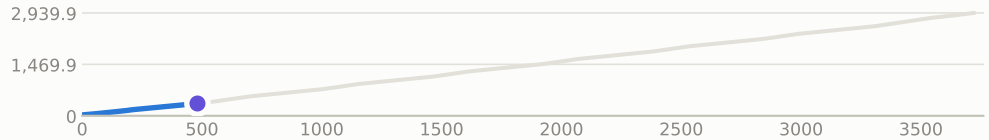

steps by process area

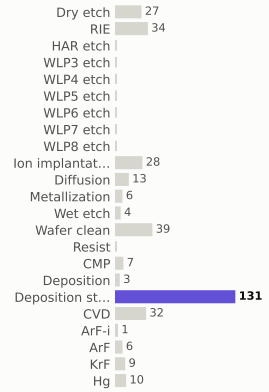

materials deposited (g)

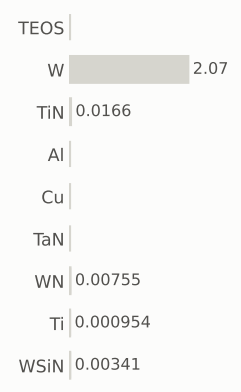

gases emitted (g)

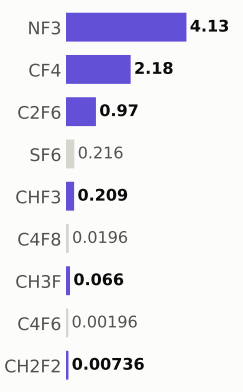

Step #4920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	352.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

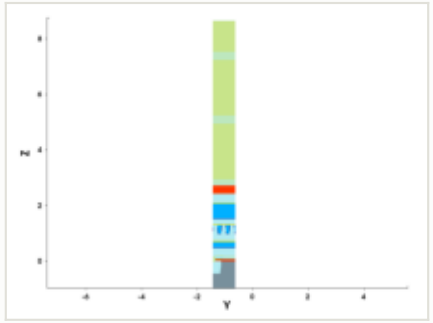

y cut at -1.035 µm

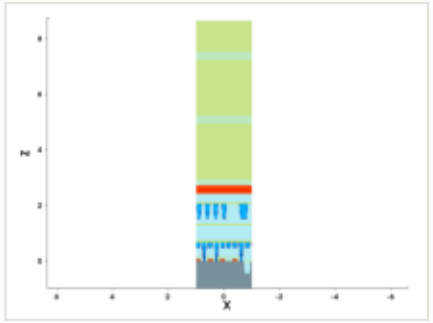

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

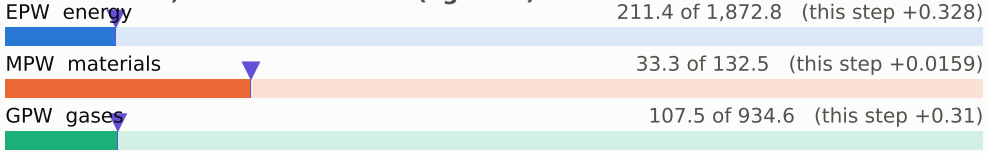

embodied carbon up to each step (kgCO2e per wafer)

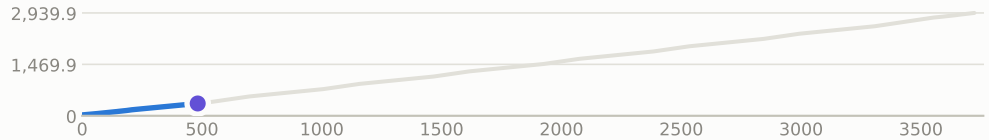

steps by process area

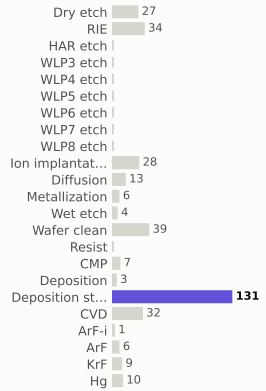

materials deposited (g)

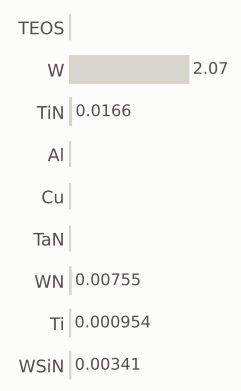

gases emitted (g)

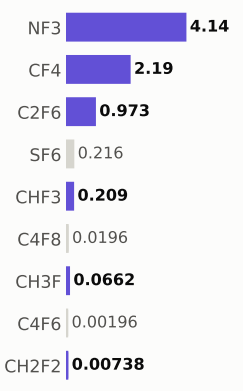

Step #4930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	352.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

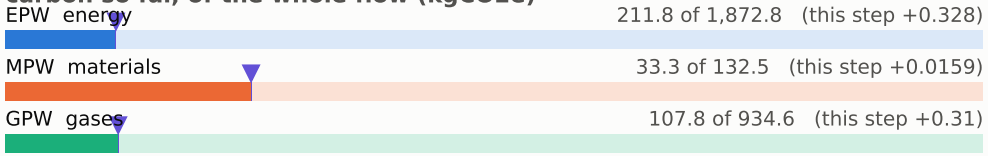

embodied carbon up to each step (kgCO2e per wafer)

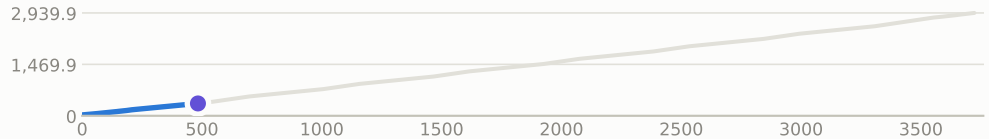

x cut at 0.000 µm

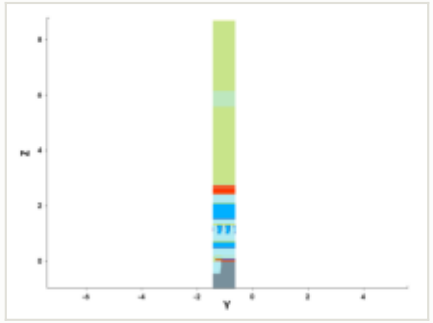

y cut at -1.035 µm

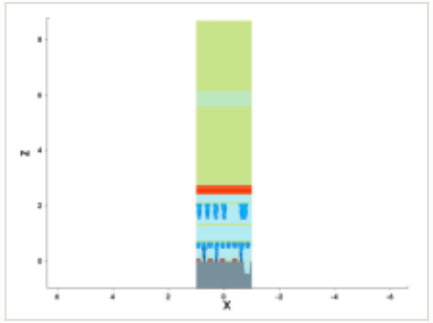

mask for this step

no mask for this step

steps by process area

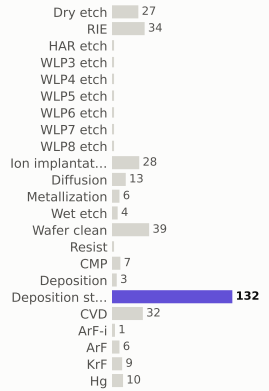

materials deposited (g)

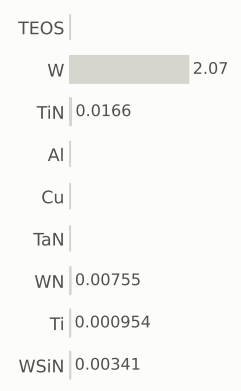

gases emitted (g)

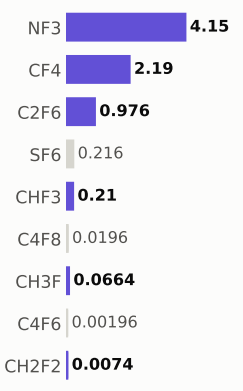

Step #4940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	353.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

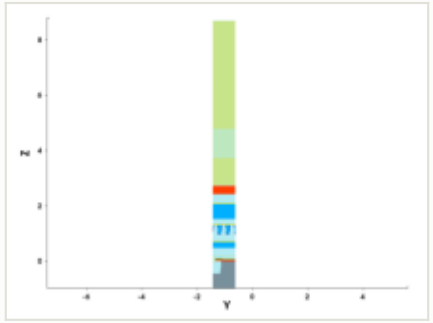

y cut at -1.035 µm

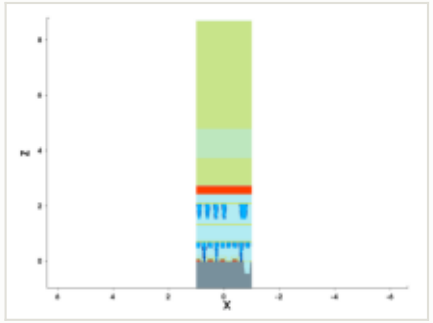

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

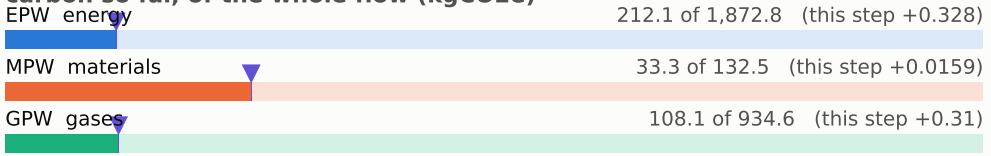

embodied carbon up to each step (kgCO2e per wafer)

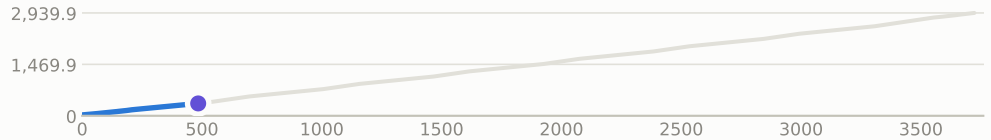

steps by process area

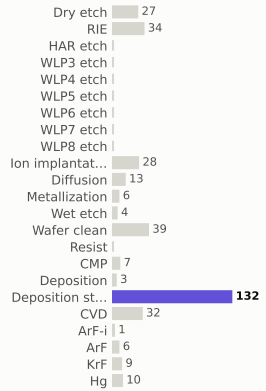

materials deposited (g)

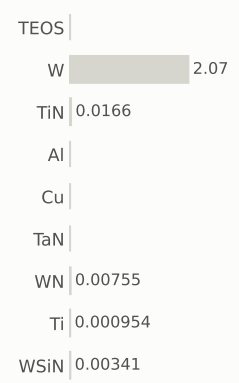

gases emitted (g)

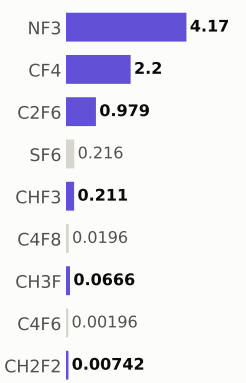

Step #4950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	354.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

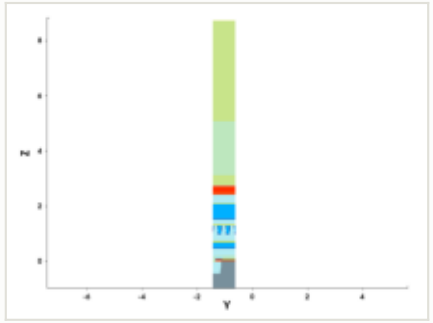

y cut at -1.035 µm

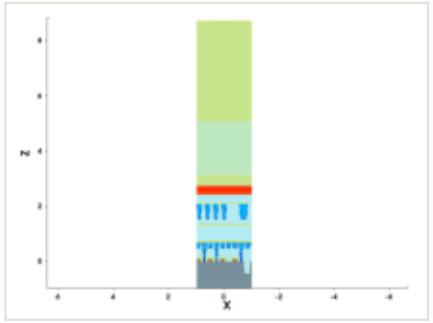

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

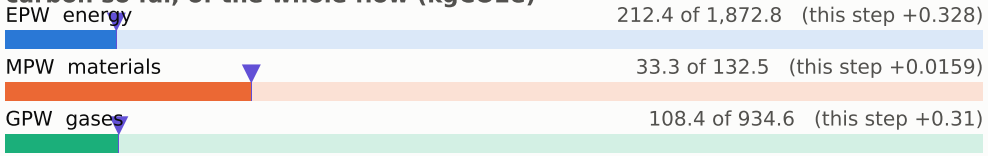

embodied carbon up to each step (kgCO2e per wafer)

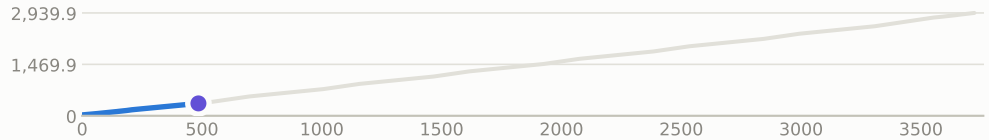

steps by process area

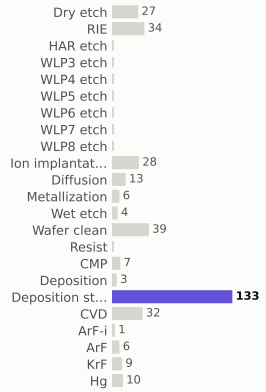

materials deposited (g)

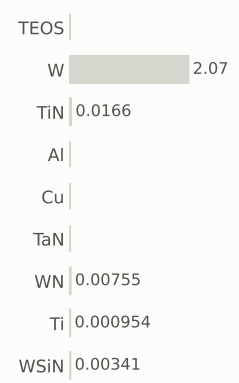

gases emitted (g)

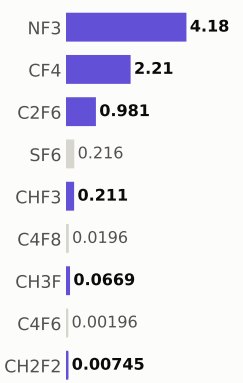

Step #4960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	354.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

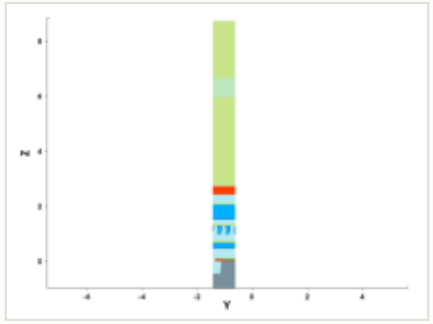

y cut at -1.035 µm

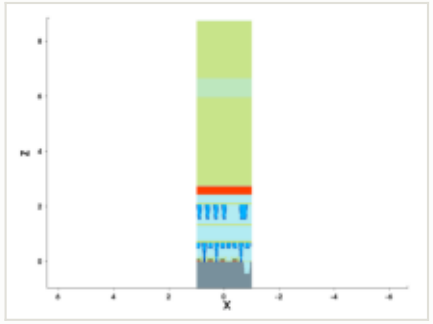

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

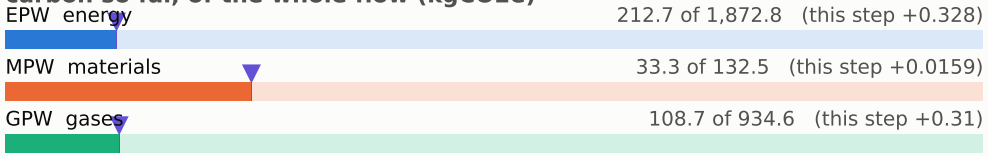

embodied carbon up to each step (kgCO2e per wafer)

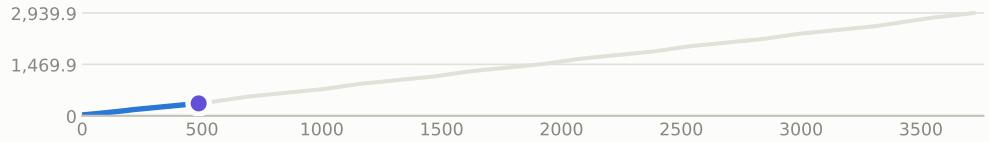

steps by process area

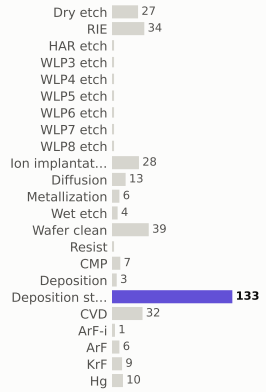

materials deposited (g)

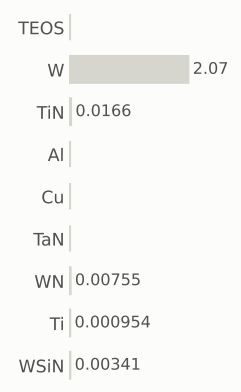

gases emitted (g)

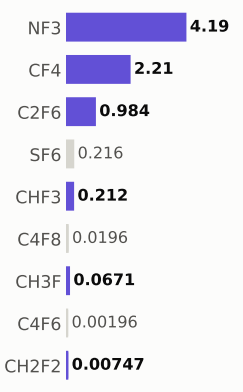

Step #4970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	355.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

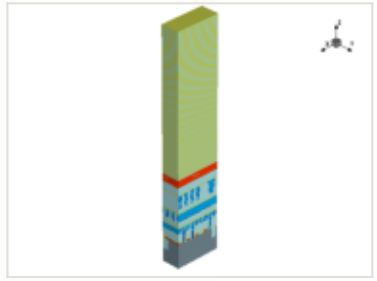

x cut at 0.000 µm

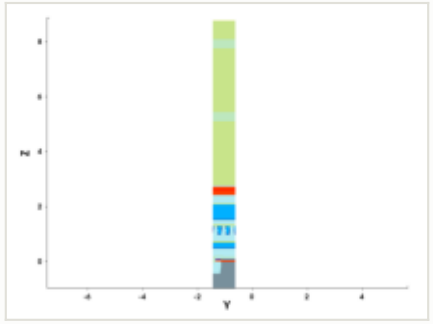

y cut at -1.035 µm

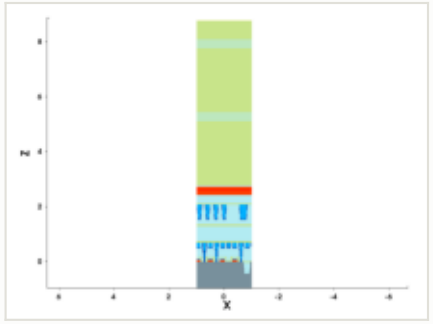

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

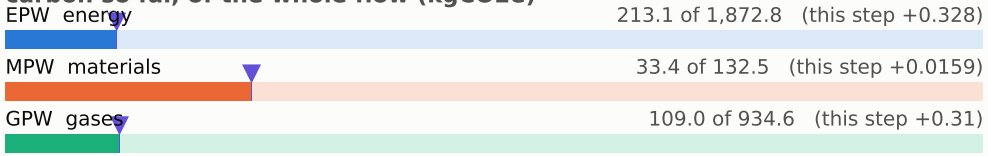

embodied carbon up to each step (kgCO2e per wafer)

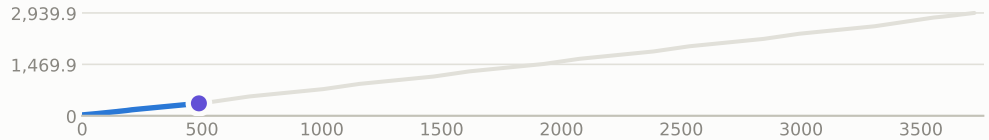

steps by process area

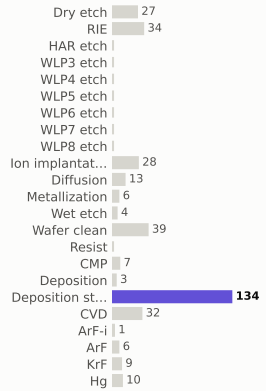

materials deposited (g)

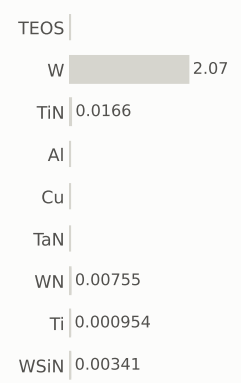

gases emitted (g)

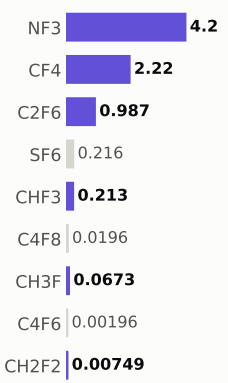

Step #4980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	356.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

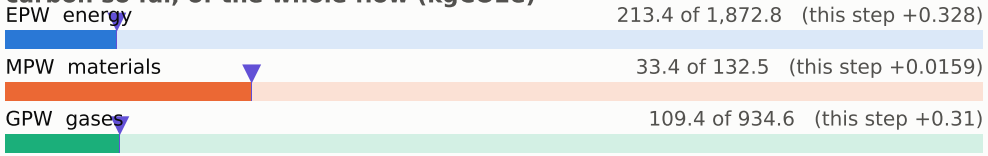

embodied carbon up to each step (kgCO2e per wafer)

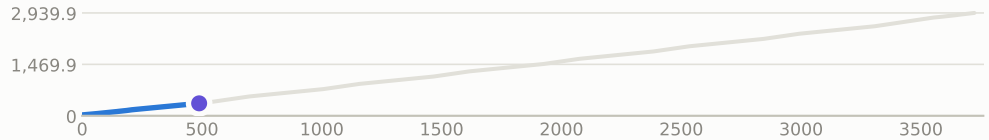

x cut at 0.000 µm

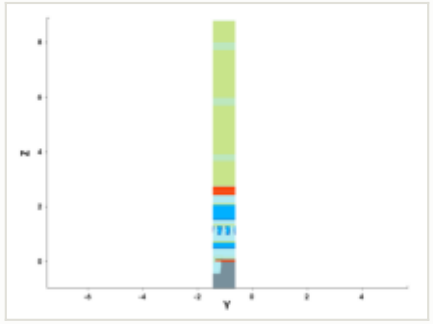

y cut at -1.035 µm

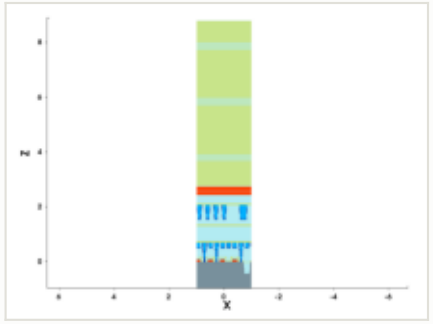

mask for this step

no mask for this step

steps by process area

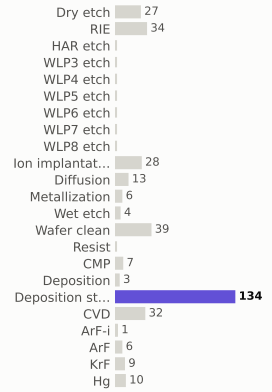

materials deposited (g)

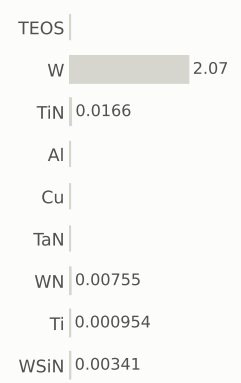

gases emitted (g)

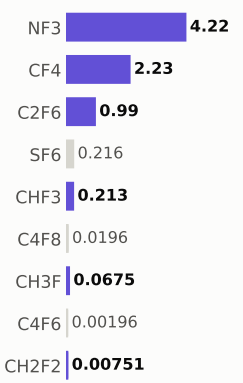

Step #4990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	356.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

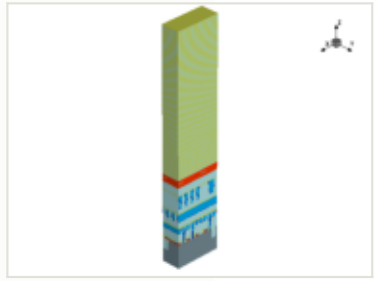

x cut at 0.000 µm

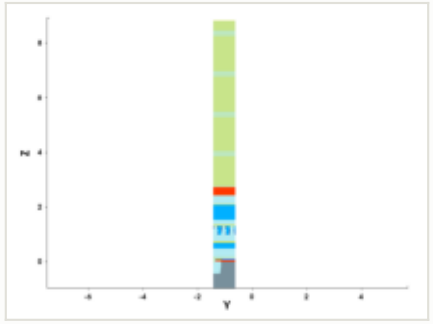

y cut at -1.035 µm

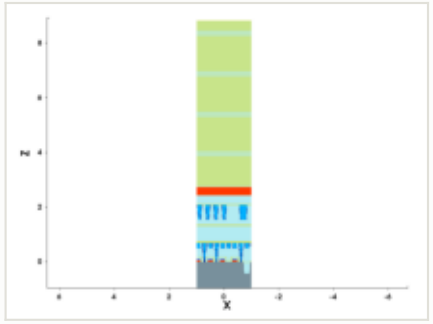

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

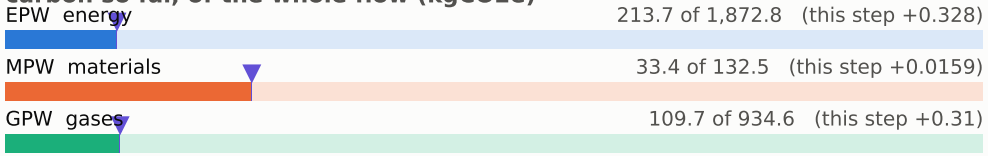

embodied carbon up to each step (kgCO2e per wafer)

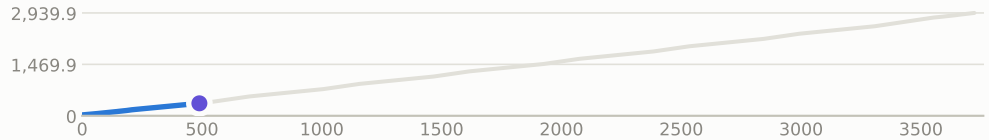

steps by process area

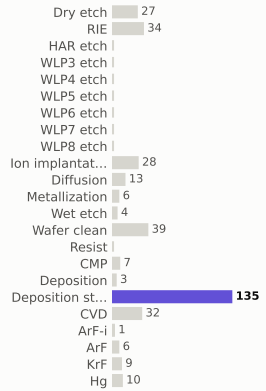

materials deposited (g)

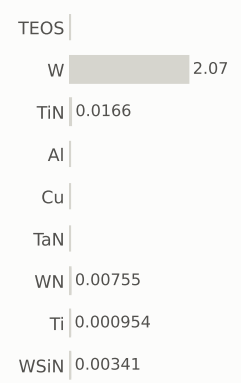

gases emitted (g)

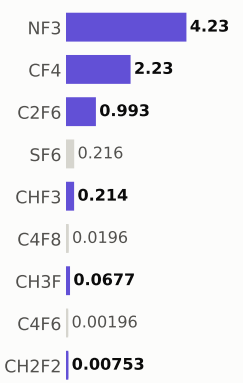

Step #5000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	357.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

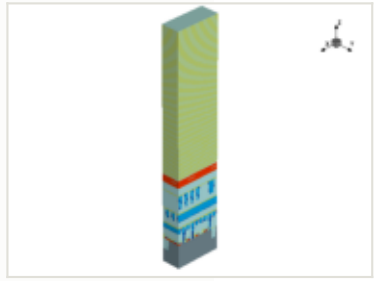

x cut at 0.000 µm

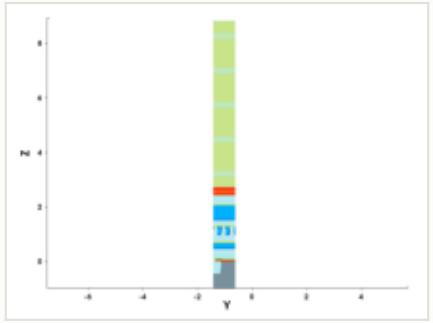

y cut at -1.035 µm

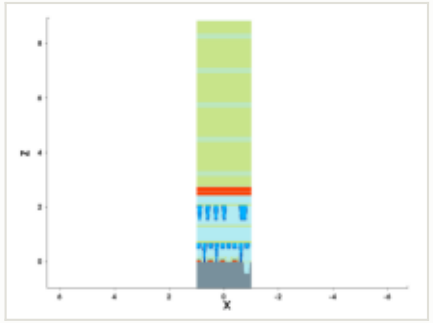

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

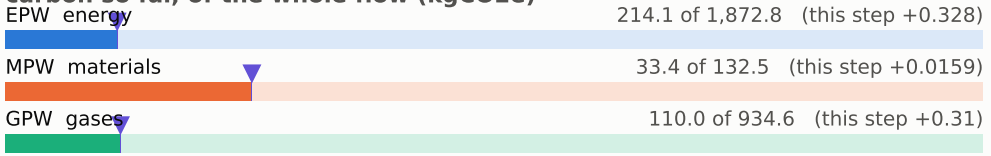

embodied carbon up to each step (kgCO2e per wafer)

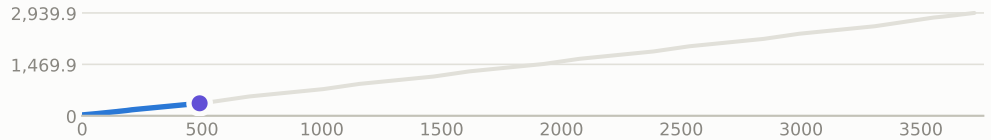

steps by process area

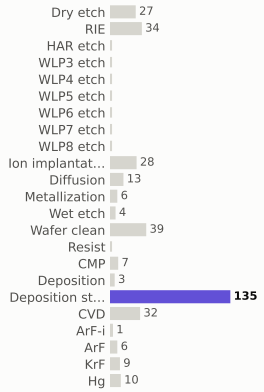

materials deposited (g)

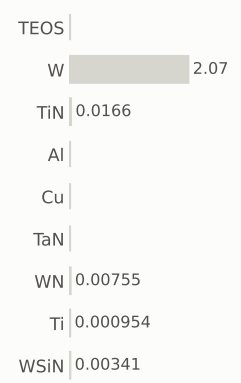

gases emitted (g)

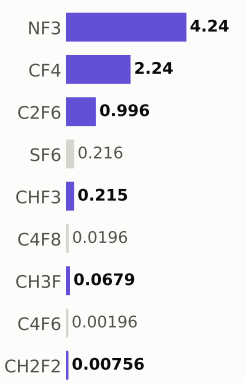

Step #5010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	358.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

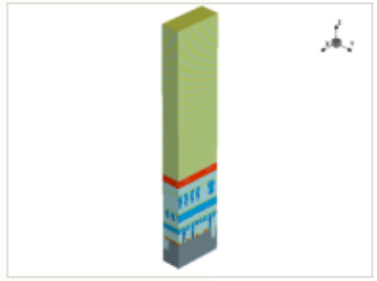

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

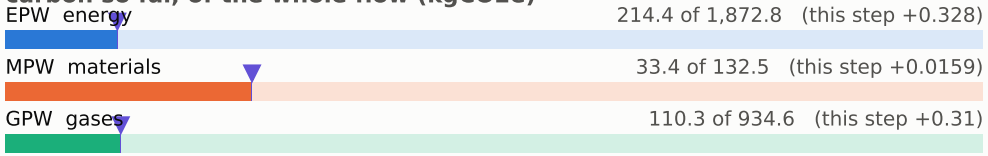

embodied carbon up to each step (kgCO2e per wafer)

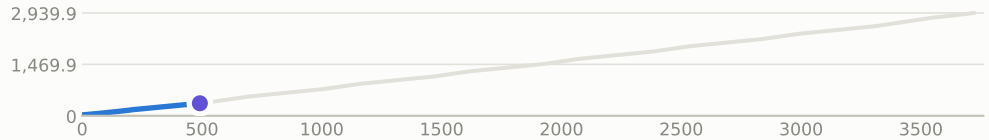

x cut at 0.000 µm

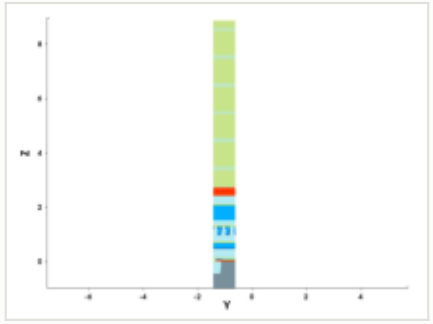

y cut at -1.035 µm

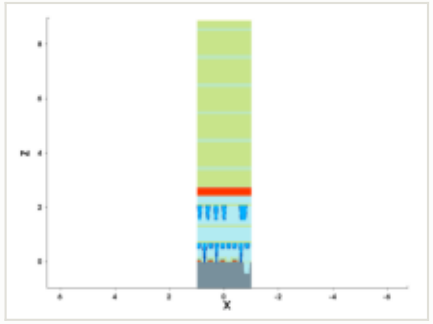

mask for this step

no mask for this step

steps by process area

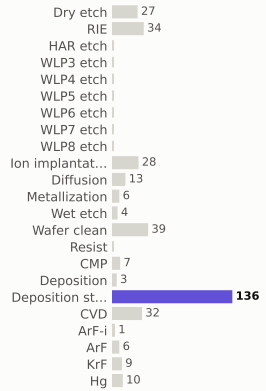

materials deposited (g)

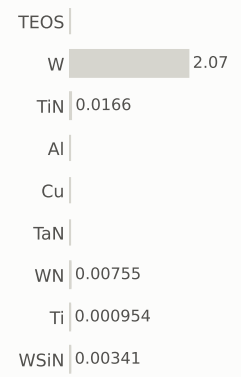

gases emitted (g)

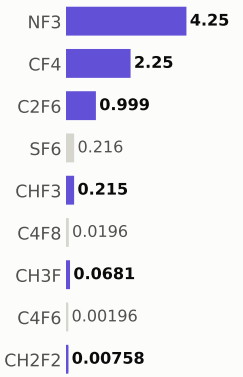

Step #5020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	358.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

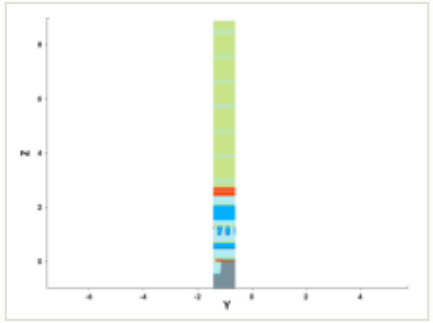

y cut at -1.035 µm

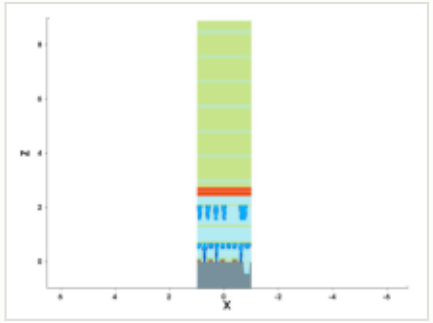

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

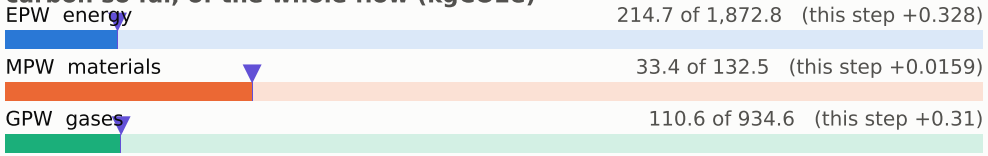

embodied carbon up to each step (kgCO2e per wafer)

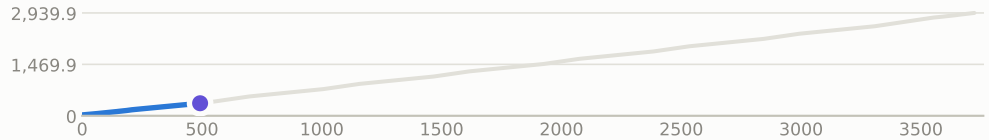

steps by process area

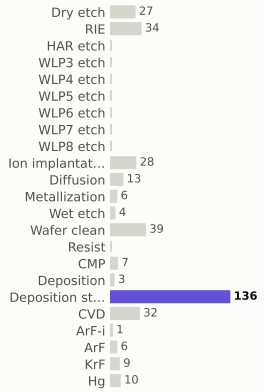

materials deposited (g)

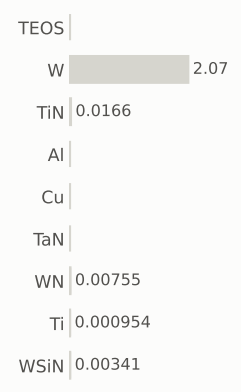

gases emitted (g)

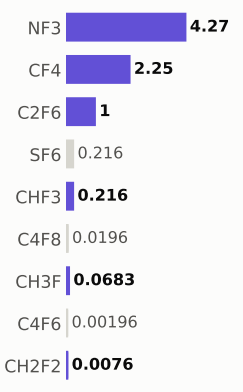

Step #5030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	359.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

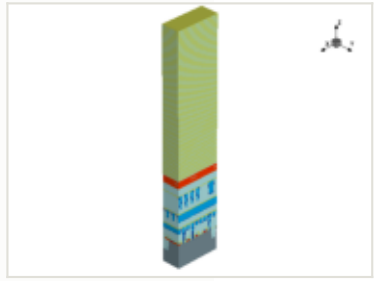

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

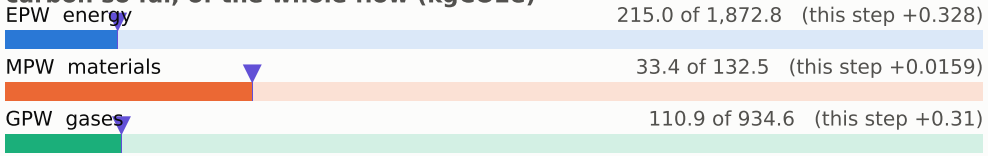

embodied carbon up to each step (kgCO2e per wafer)

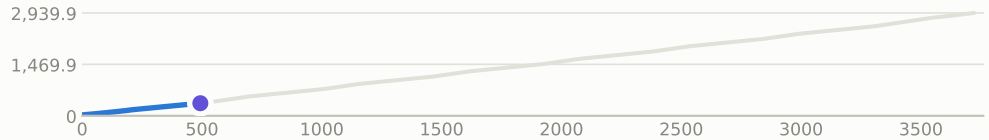

x cut at 0.000 µm

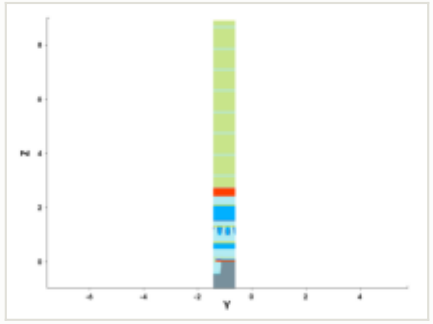

y cut at -1.035 µm

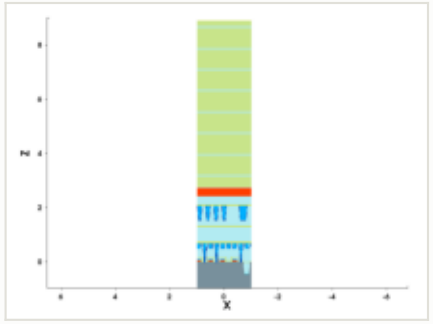

mask for this step

no mask for this step

steps by process area

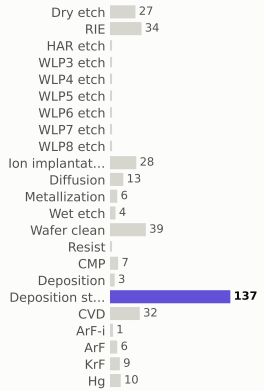

materials deposited (g)

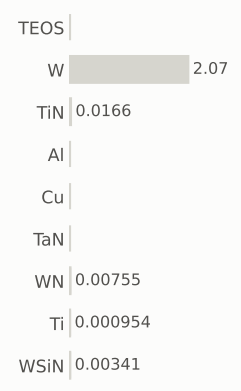

gases emitted (g)

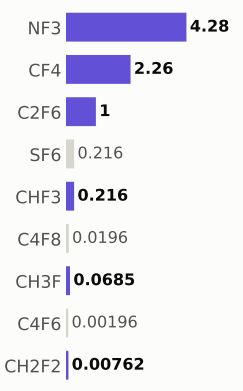

Step #5040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	360.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

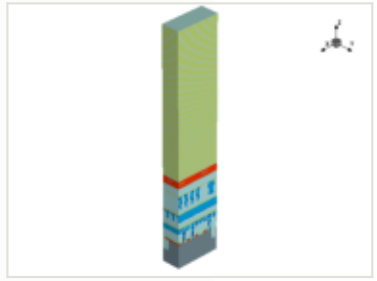

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

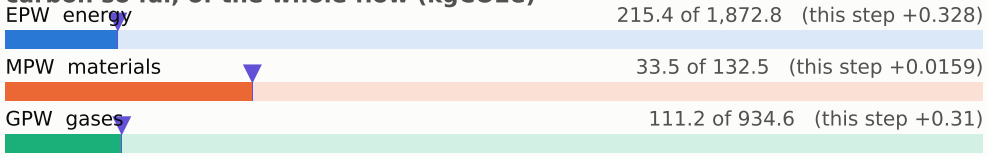

embodied carbon up to each step (kgCO2e per wafer)

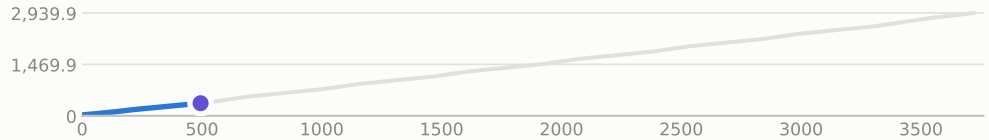

x cut at 0.000 µm

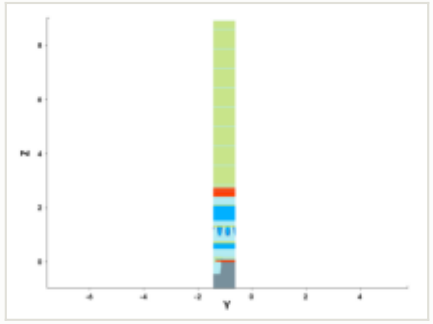

y cut at -1.035 µm

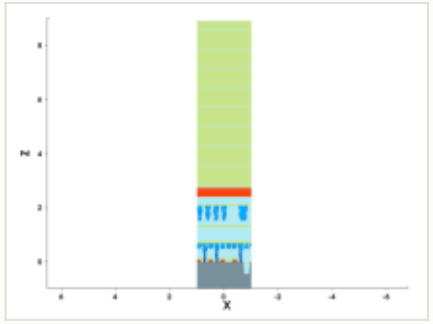

mask for this step

no mask for this step

steps by process area

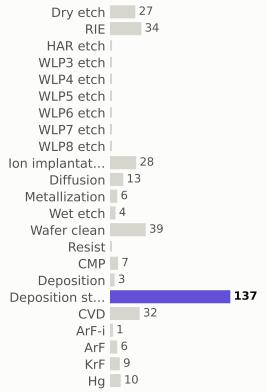

materials deposited (g)

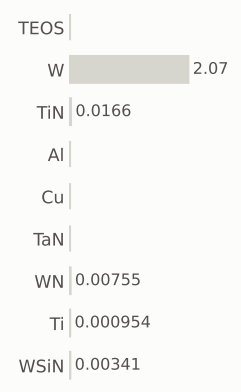

gases emitted (g)

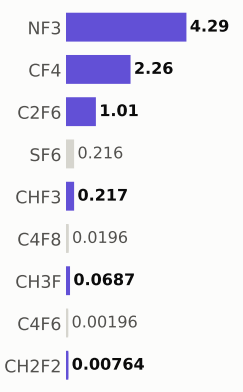

Step #5050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	360.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

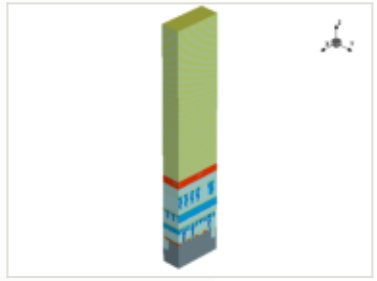

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

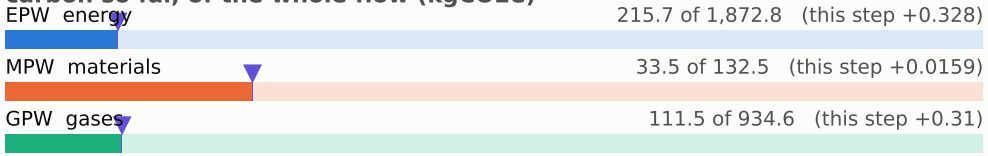

embodied carbon up to each step (kgCO2e per wafer)

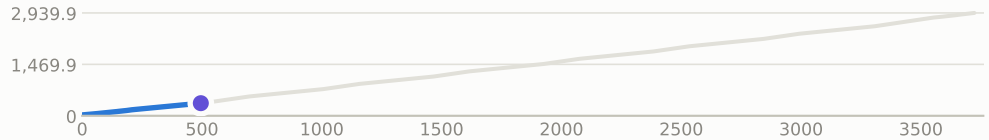

x cut at 0.000 µm

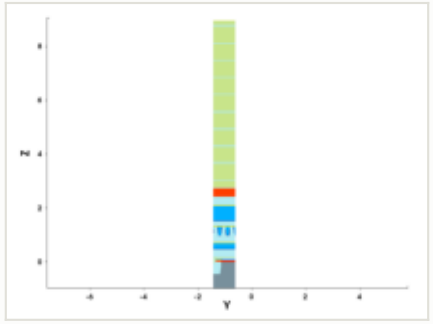

y cut at -1.035 µm

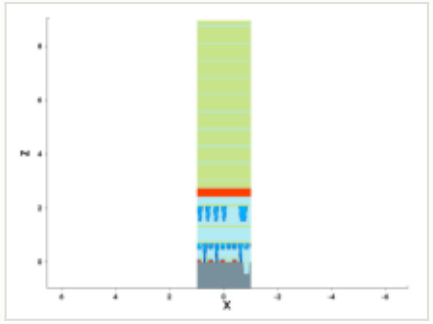

mask for this step

no mask for this step

steps by process area

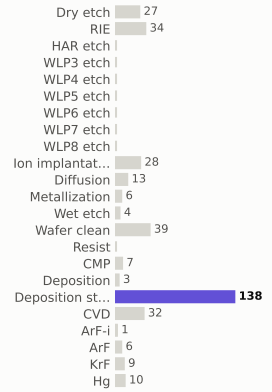

materials deposited (g)

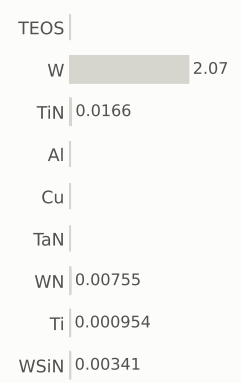

gases emitted (g)

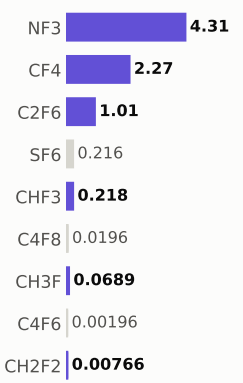

Step #5060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	361.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

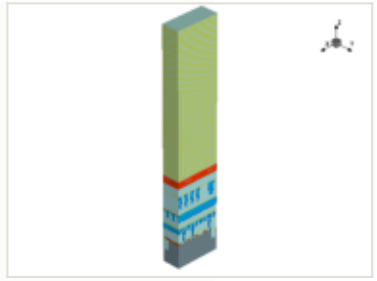

x cut at 0.000 µm

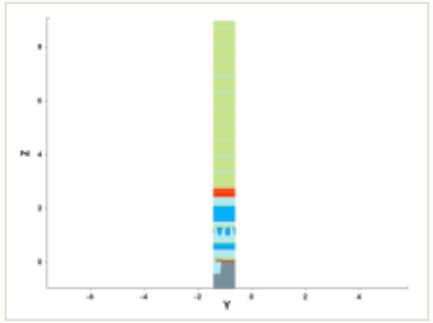

y cut at -1.035 µm

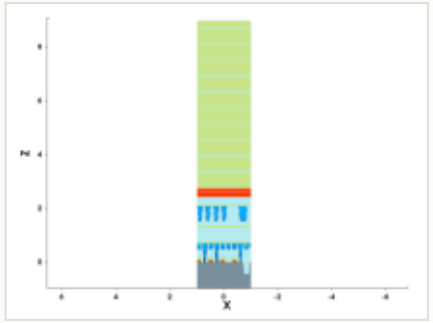

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

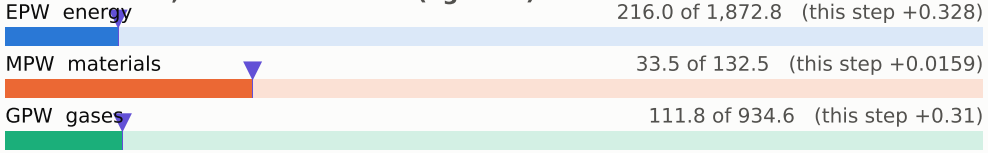

embodied carbon up to each step (kgCO2e per wafer)

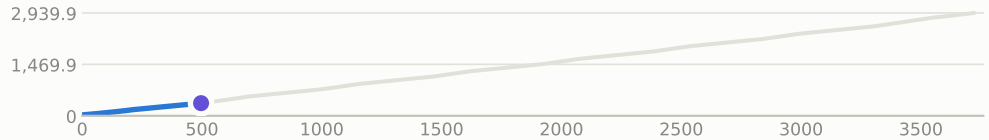

steps by process area

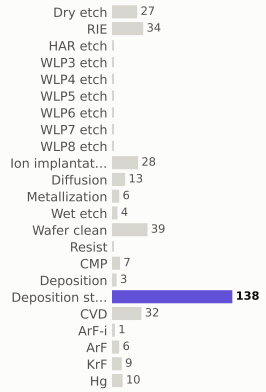

materials deposited (g)

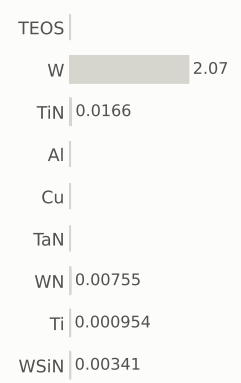

gases emitted (g)

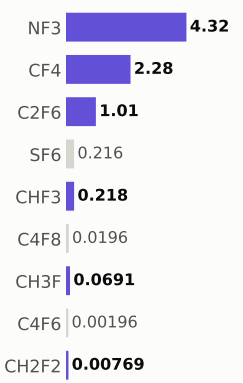

Step #5070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	362.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

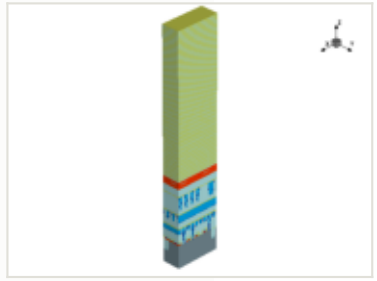

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

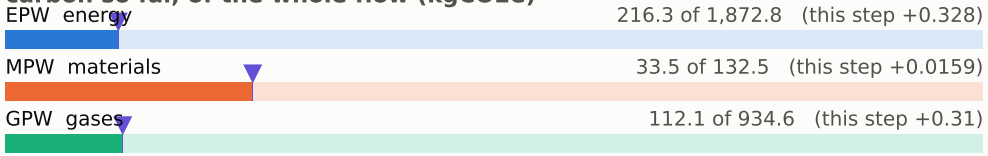

embodied carbon up to each step (kgCO2e per wafer)

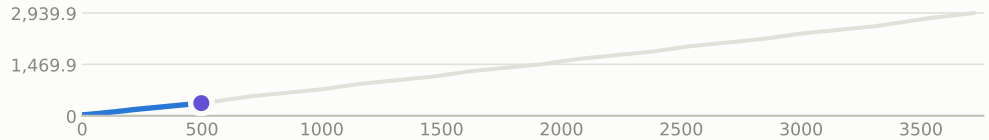

x cut at 0.000 µm

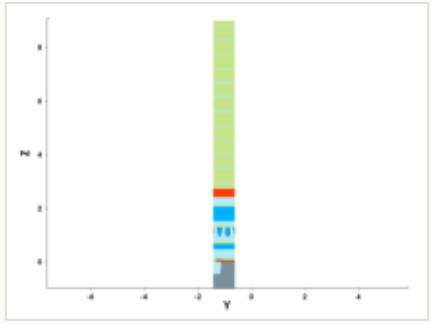

y cut at -1.035 µm

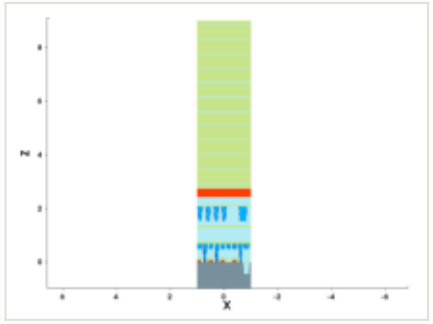

mask for this step

no mask for this step

steps by process area

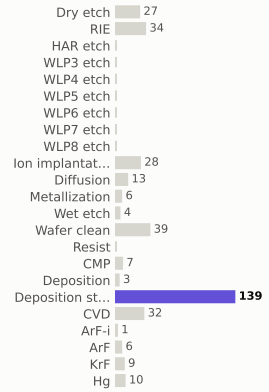

materials deposited (g)

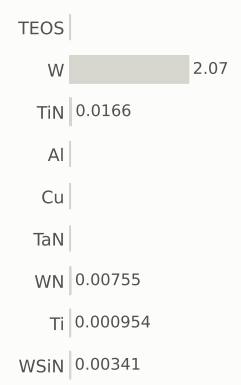

gases emitted (g)

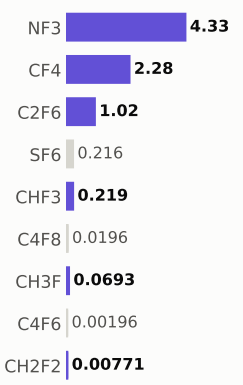

Step #5080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	362.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

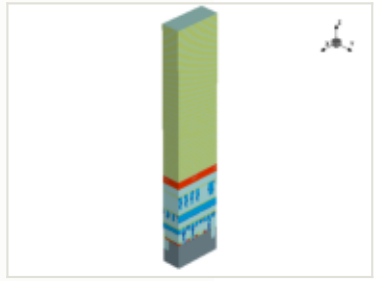

x cut at 0.000 µm

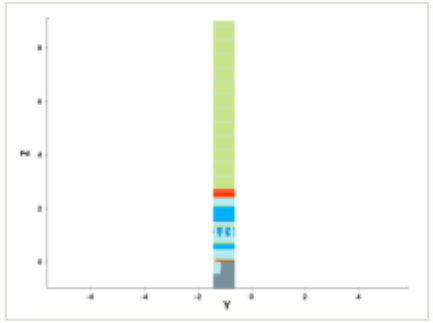

y cut at -1.035 µm

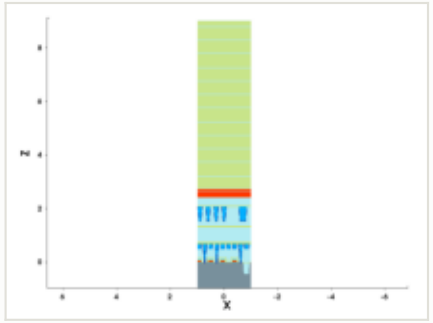

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

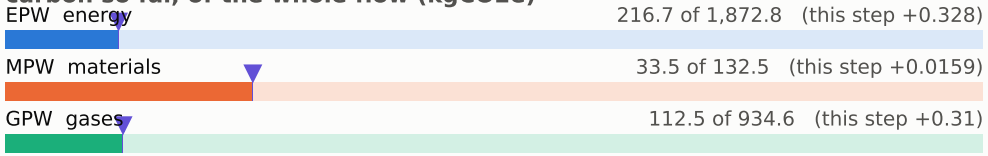

embodied carbon up to each step (kgCO2e per wafer)

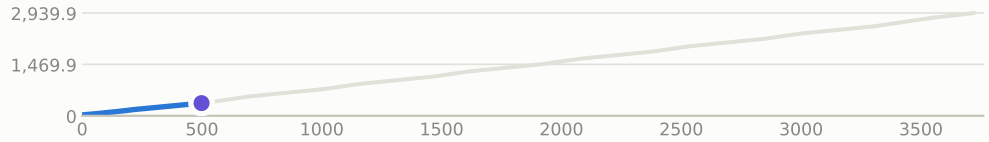

steps by process area

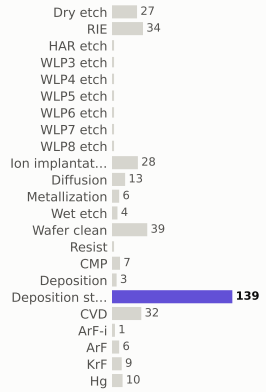

materials deposited (g)

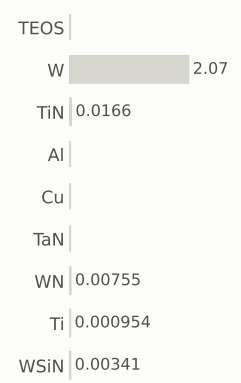

gases emitted (g)

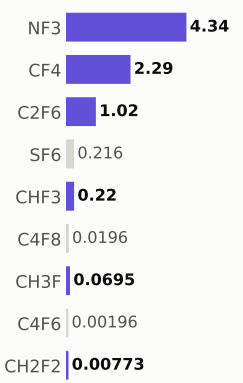

Step #5090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	363.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

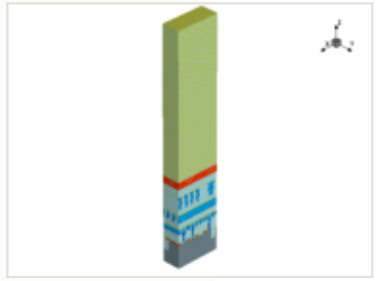

x cut at 0.000 µm

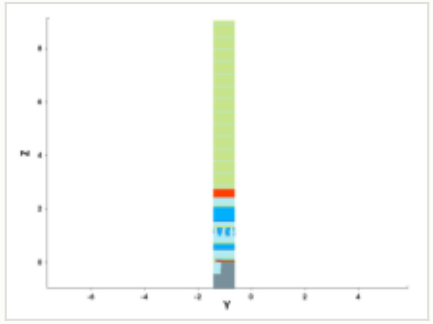

y cut at -1.035 µm

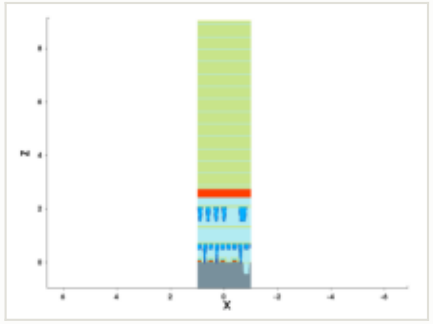

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

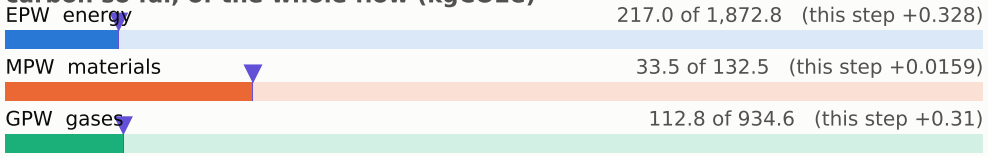

embodied carbon up to each step (kgCO2e per wafer)

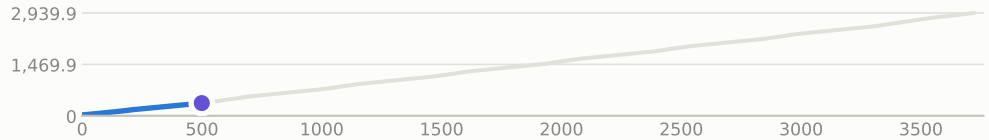

steps by process area

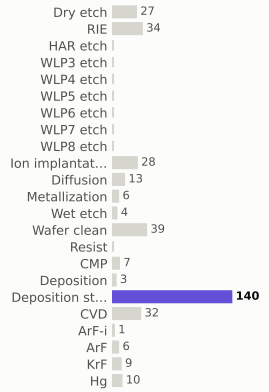

materials deposited (g)

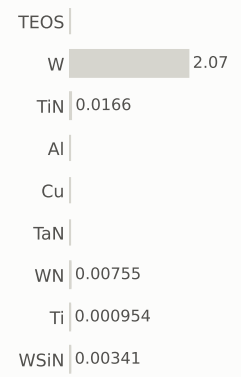

gases emitted (g)

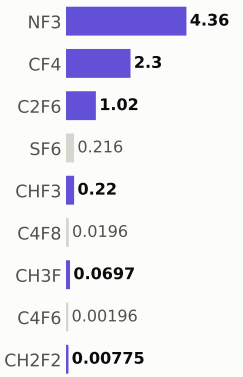

Step #5100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	364.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

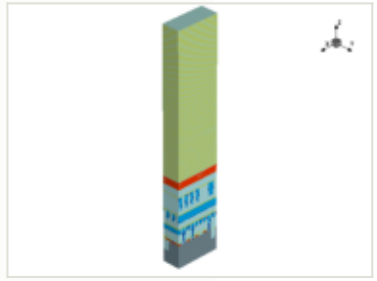

x cut at 0.000 µm

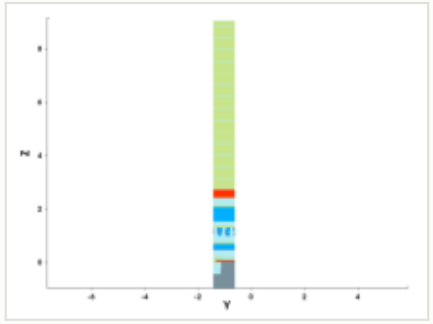

y cut at -1.035 µm

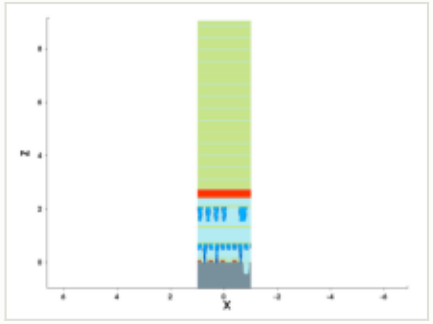

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

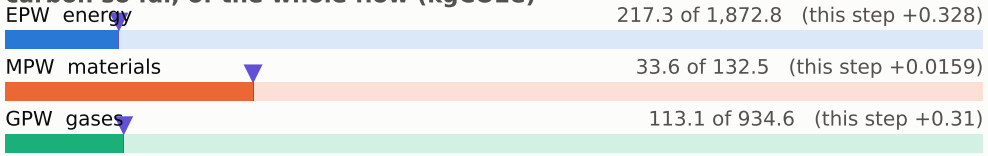

embodied carbon up to each step (kgCO2e per wafer)

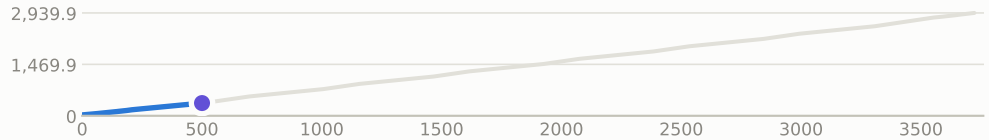

steps by process area

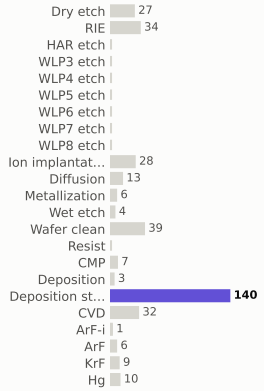

materials deposited (g)

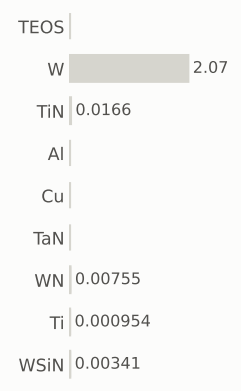

gases emitted (g)

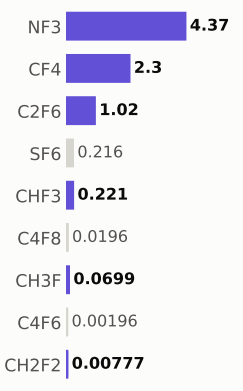

Step #5110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	364.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

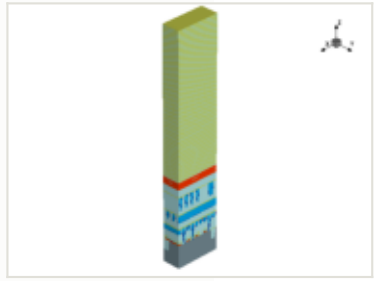

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

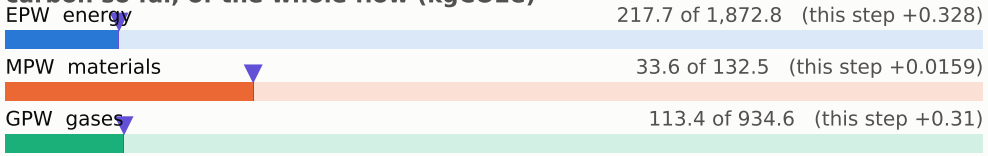

embodied carbon up to each step (kgCO2e per wafer)

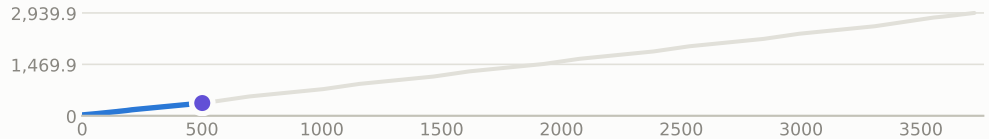

x cut at 0.000 µm

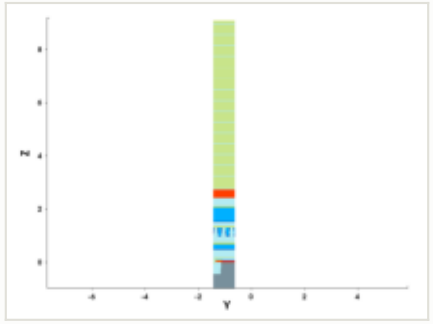

y cut at -1.035 µm

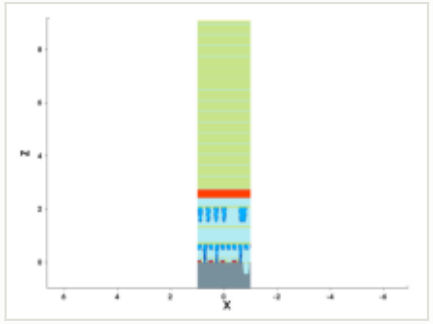

mask for this step

no mask for this step

steps by process area

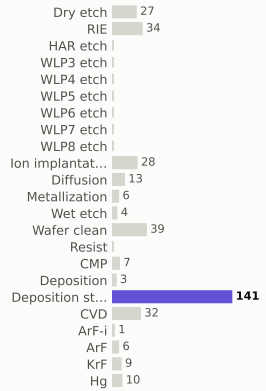

materials deposited (g)

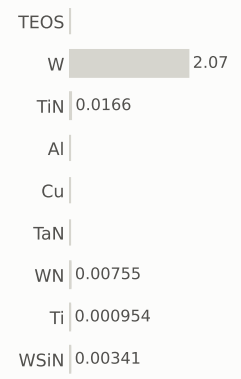

gases emitted (g)

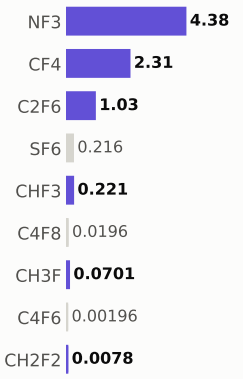

Step #5120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	365.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

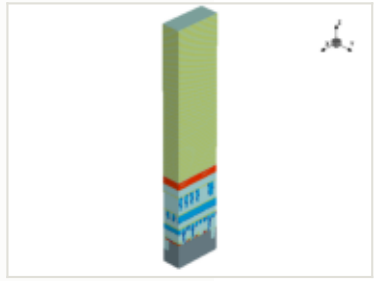

x cut at 0.000 µm

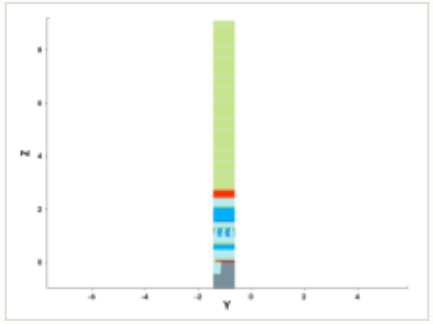

y cut at -1.035 µm

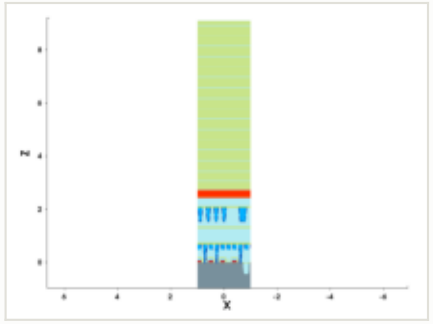

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

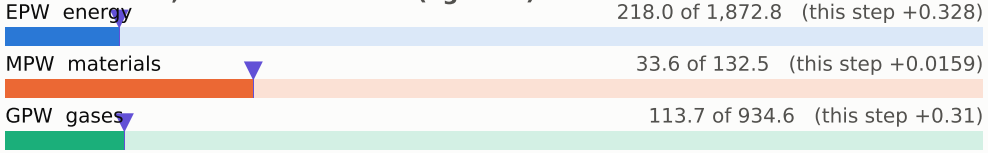

embodied carbon up to each step (kgCO2e per wafer)

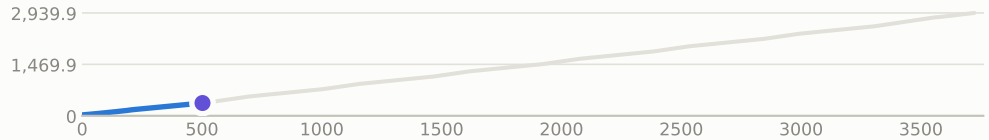

steps by process area

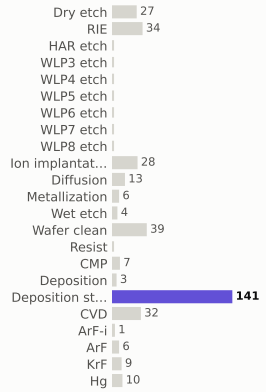

materials deposited (g)

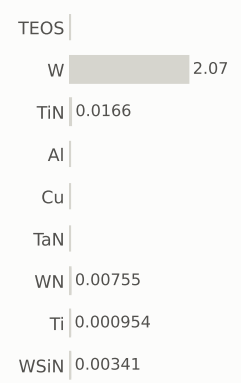

gases emitted (g)

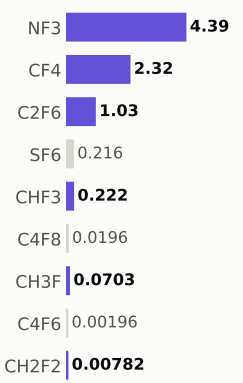

Step #5130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	365.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

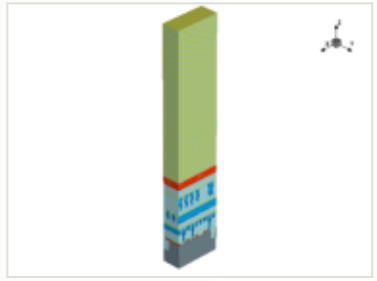

x cut at 0.000 µm

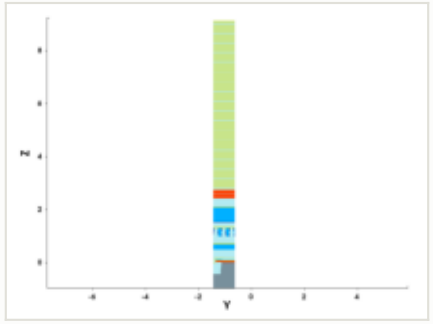

y cut at -1.035 µm

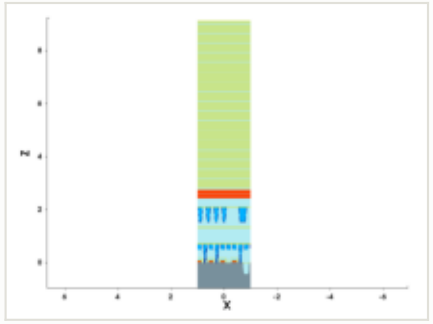

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

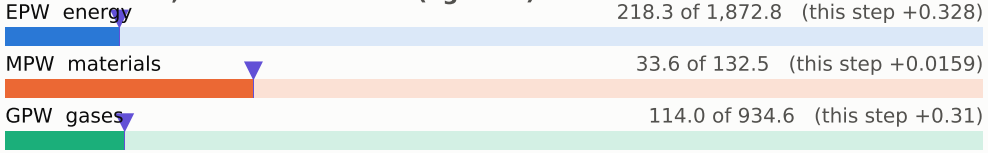

embodied carbon up to each step (kgCO2e per wafer)

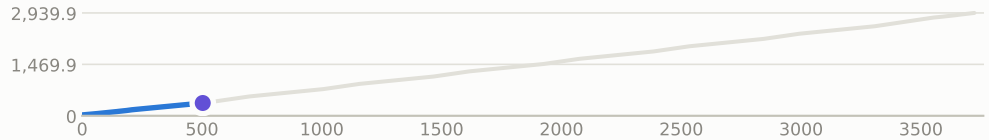

steps by process area

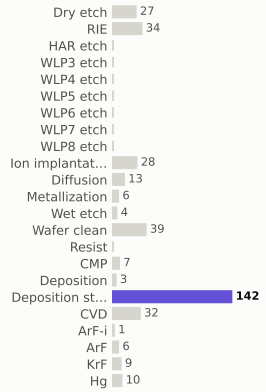

materials deposited (g)

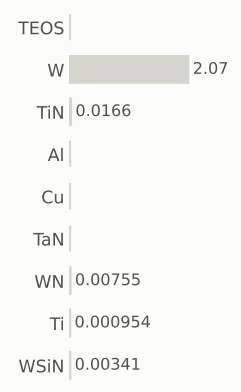

gases emitted (g)

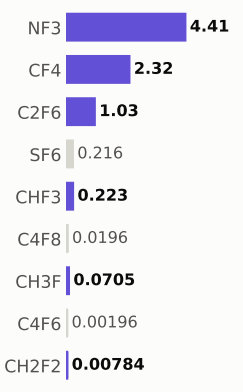

Step #5140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	366.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

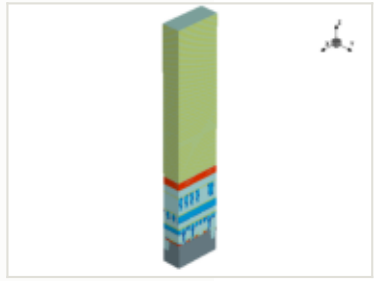

x cut at 0.000 µm

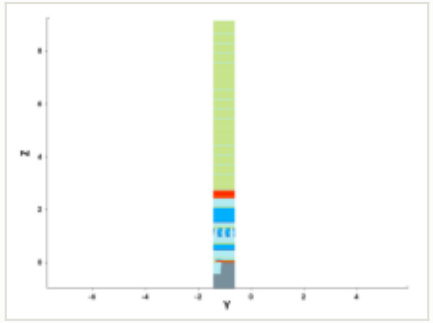

y cut at -1.035 µm

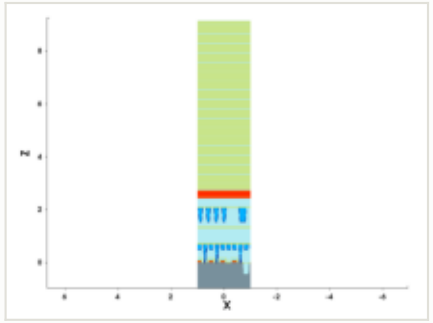

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

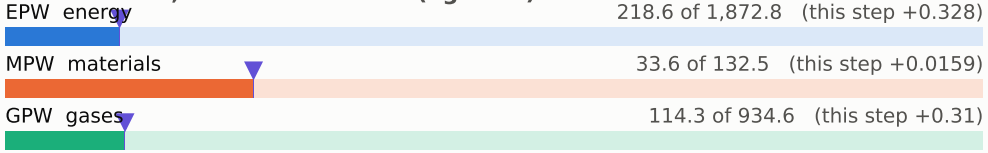

embodied carbon up to each step (kgCO2e per wafer)

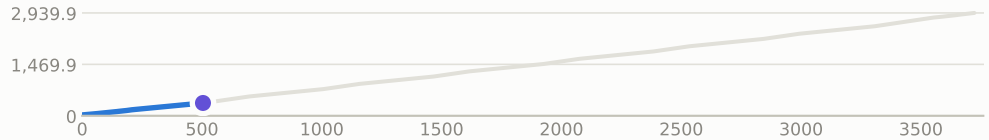

steps by process area

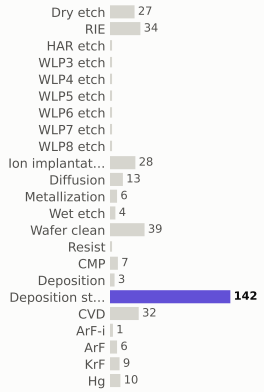

materials deposited (g)

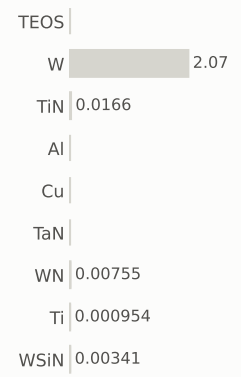

gases emitted (g)

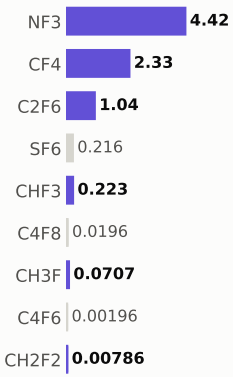

Step #5150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	367.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

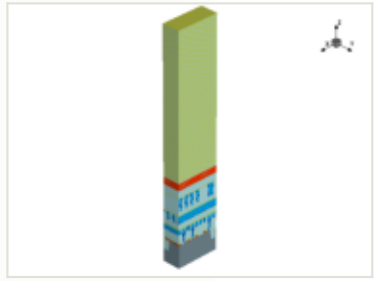

x cut at 0.000 µm

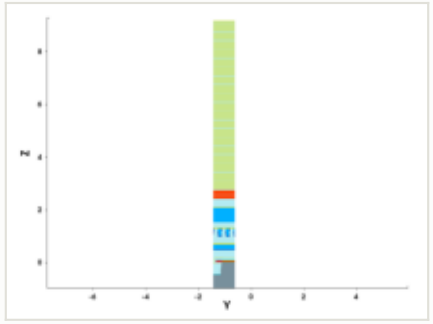

y cut at -1.035 µm

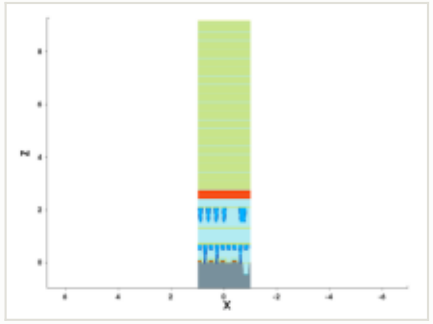

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

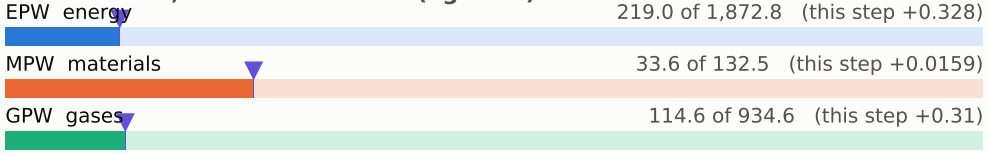

embodied carbon up to each step (kgCO2e per wafer)

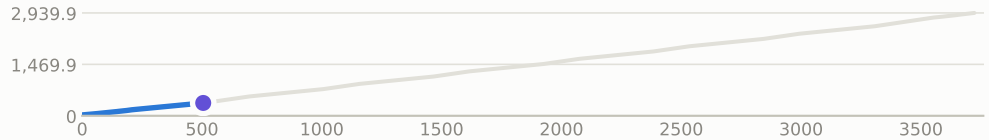

steps by process area

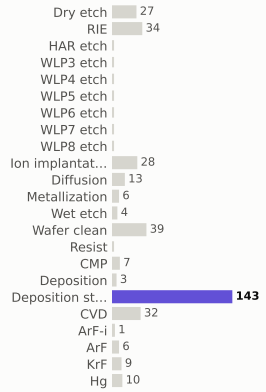

materials deposited (g)

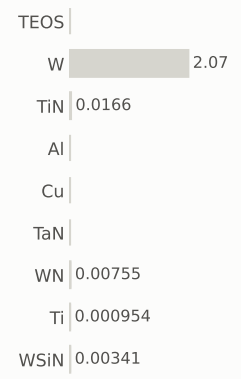

gases emitted (g)

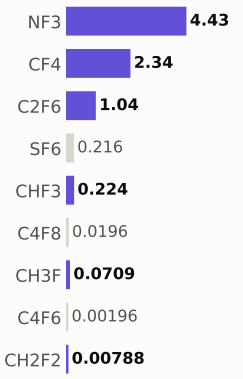

Step #5160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	367.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

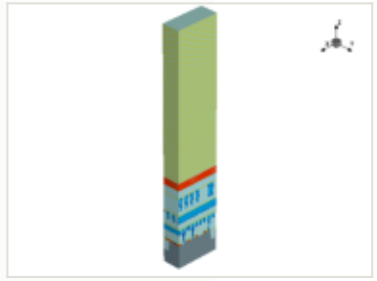

x cut at 0.000 µm

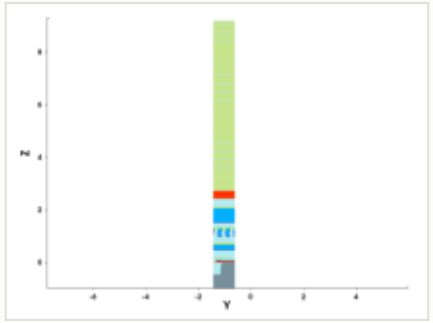

y cut at -1.035 µm

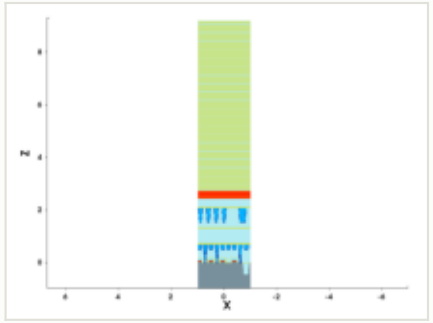

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

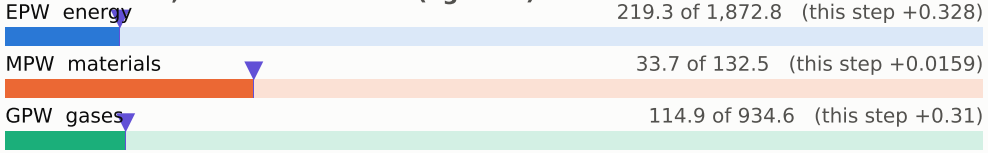

embodied carbon up to each step (kgCO2e per wafer)

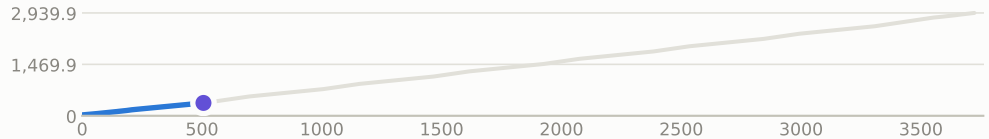

steps by process area

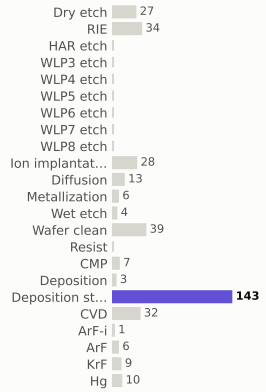

materials deposited (g)

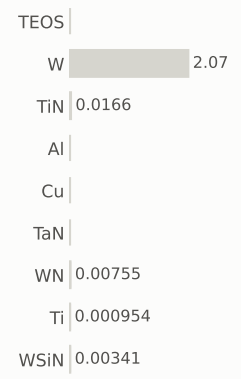

gases emitted (g)

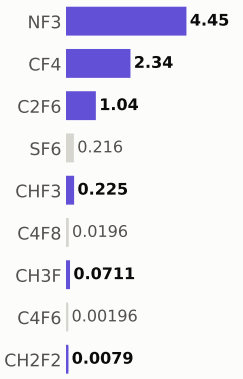

Step #5170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	368.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

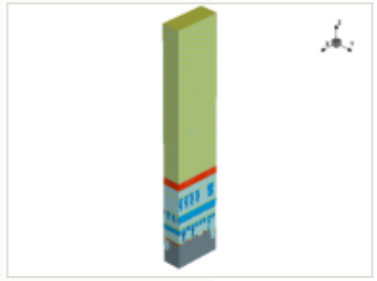

x cut at 0.000 µm

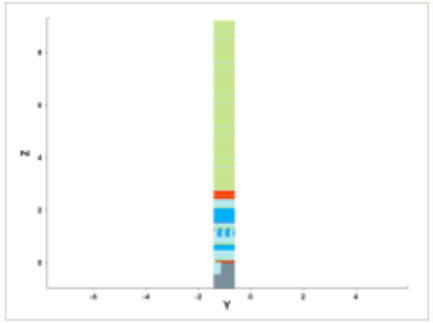

y cut at -1.035 µm

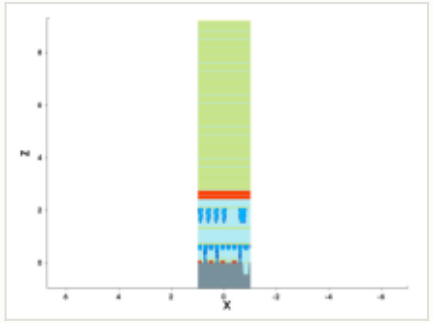

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

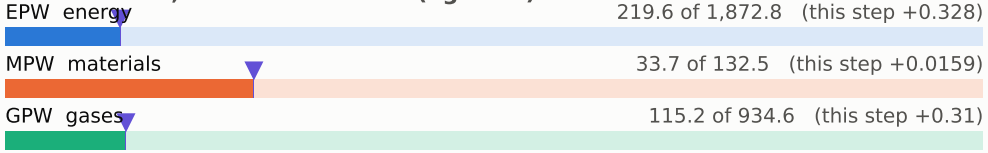

embodied carbon up to each step (kgCO2e per wafer)

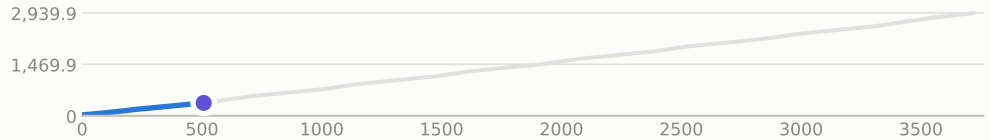

steps by process area

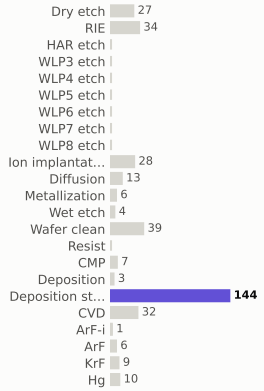

materials deposited (g)

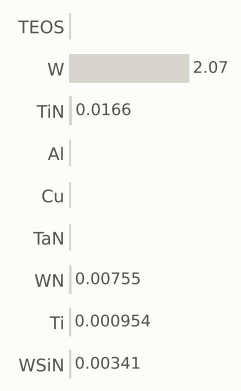

gases emitted (g)

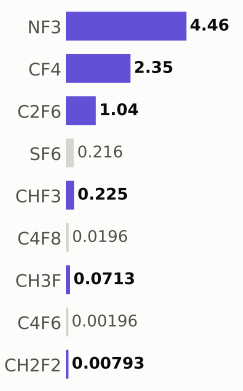

Step #5180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	369.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

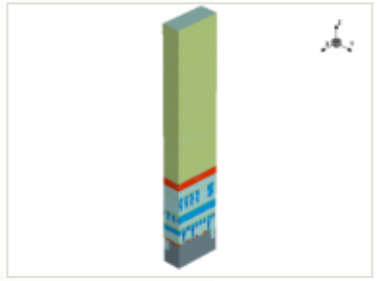

x cut at 0.000 µm

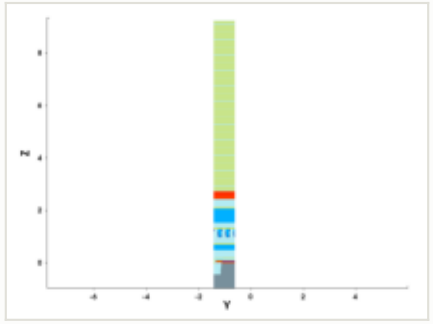

y cut at -1.035 µm

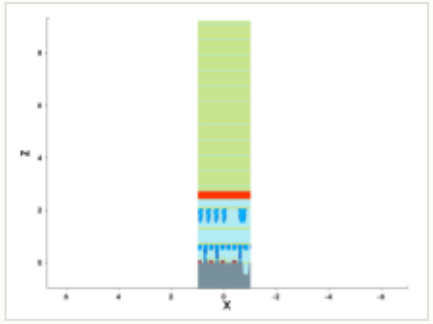

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

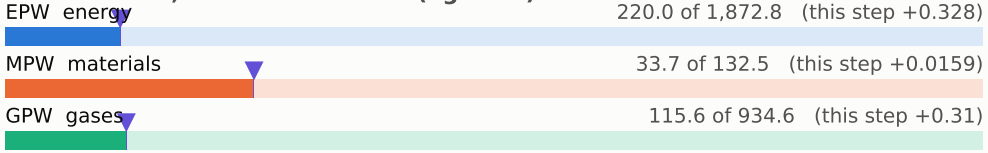

embodied carbon up to each step (kgCO2e per wafer)

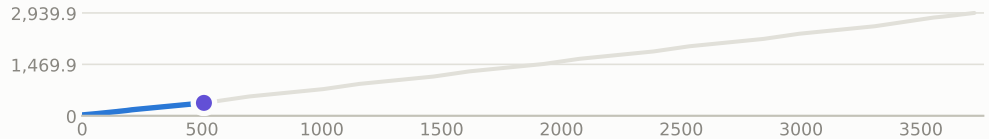

steps by process area

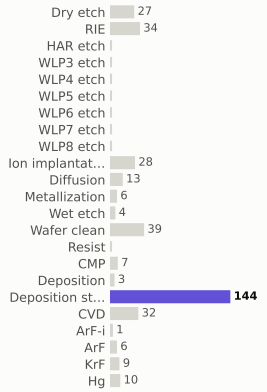

materials deposited (g)

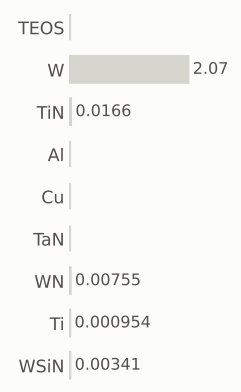

gases emitted (g)

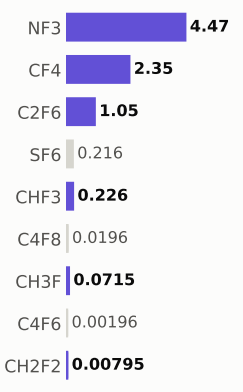

Step #5190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	369.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

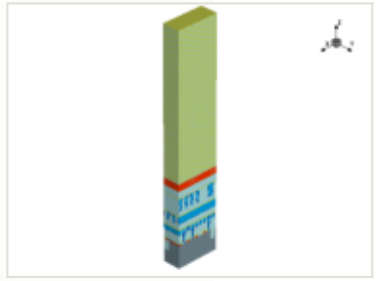

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

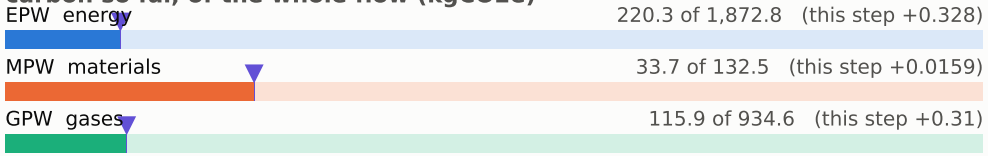

embodied carbon up to each step (kgCO2e per wafer)

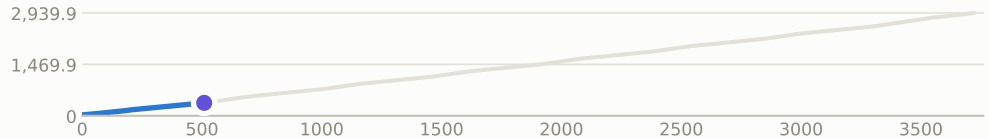

x cut at 0.000 µm

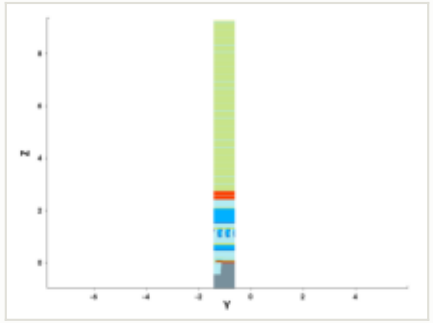

y cut at -1.035 µm

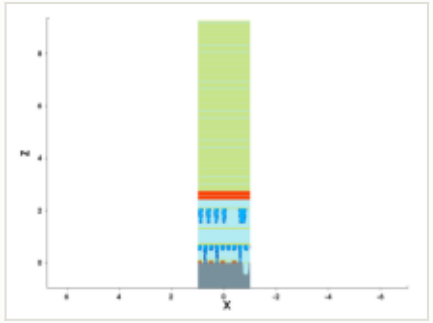

mask for this step

no mask for this step

steps by process area

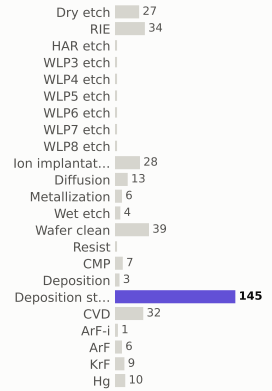

materials deposited (g)

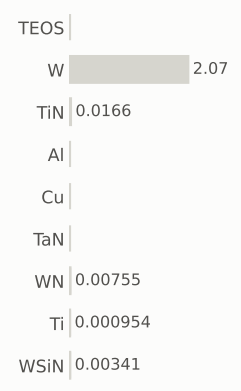

gases emitted (g)

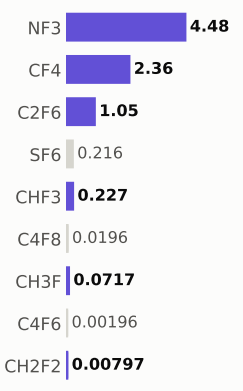

Step #5200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	370.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

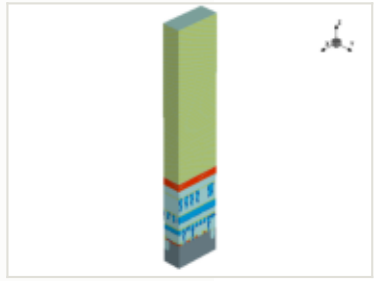

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

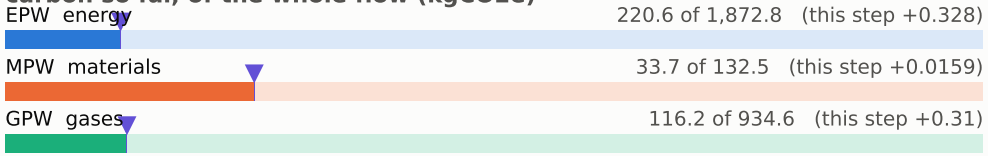

embodied carbon up to each step (kgCO2e per wafer)

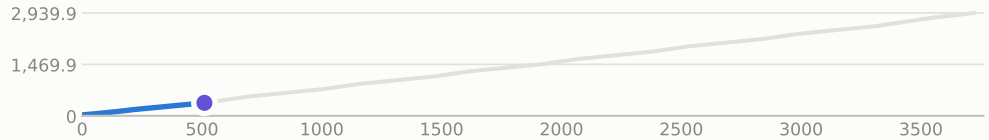

x cut at 0.000 µm

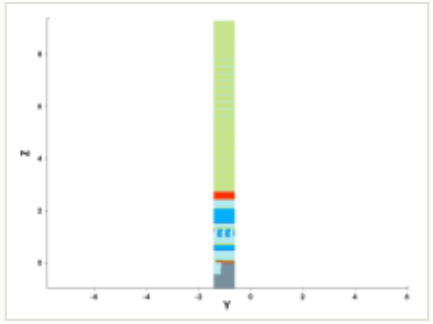

y cut at -1.035 µm

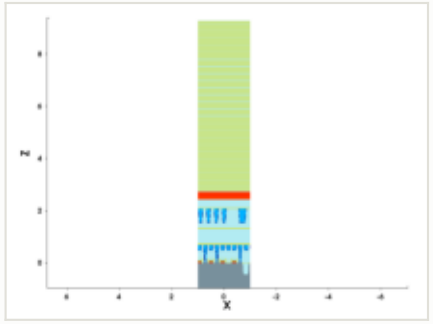

mask for this step

no mask for this step

steps by process area

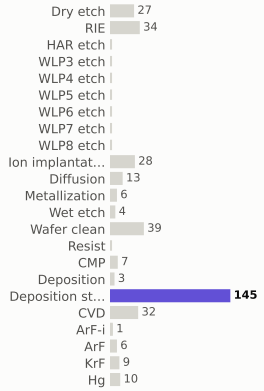

materials deposited (g)

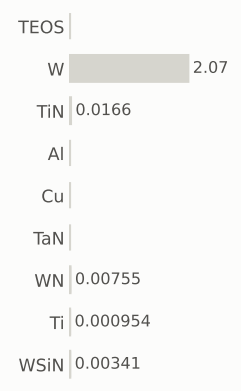

gases emitted (g)

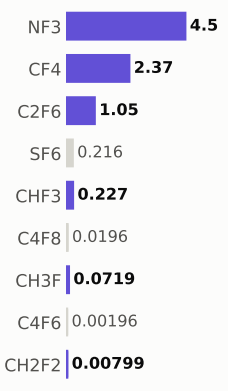

Step #5210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	371.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

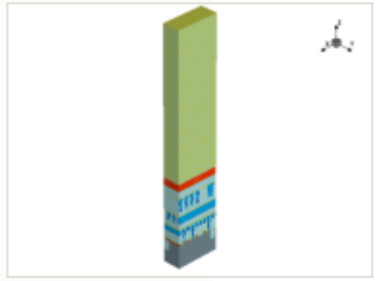

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

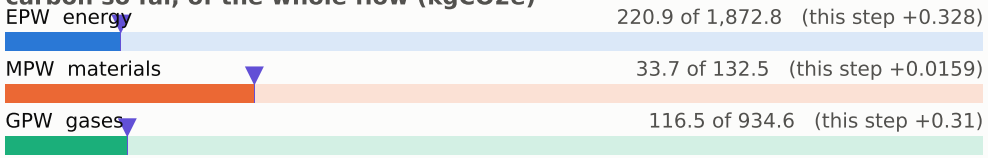

embodied carbon up to each step (kgCO2e per wafer)

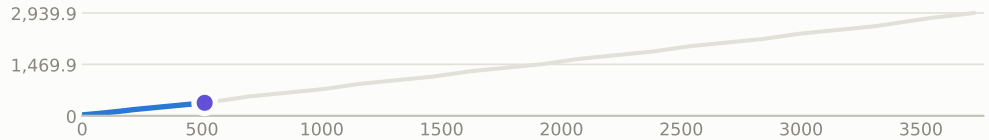

x cut at 0.000 µm

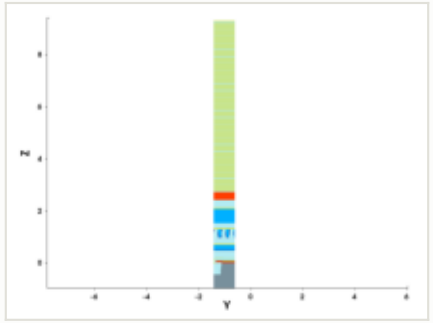

y cut at -1.035 µm

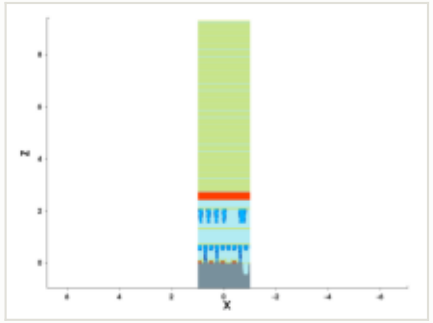

mask for this step

no mask for this step

steps by process area

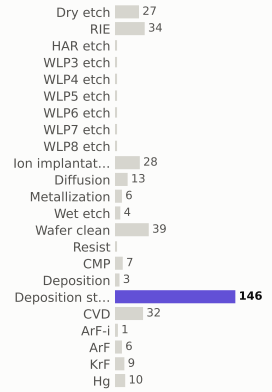

materials deposited (g)

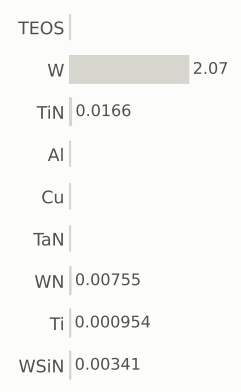

gases emitted (g)

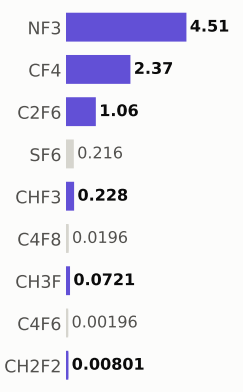

Step #5220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	371.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

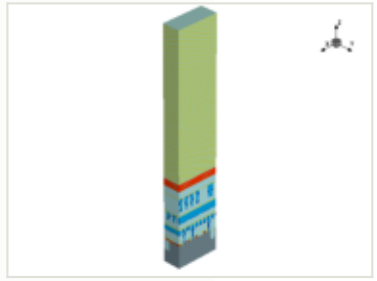

x cut at 0.000 µm

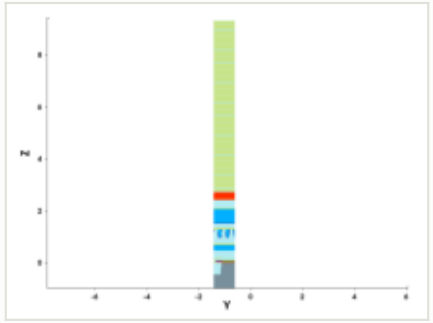

y cut at -1.035 µm

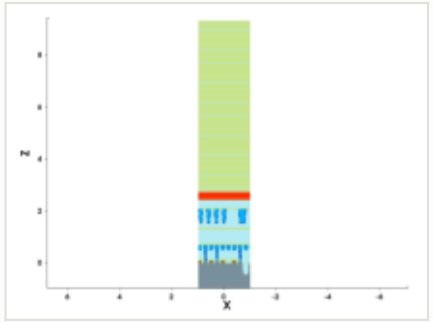

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

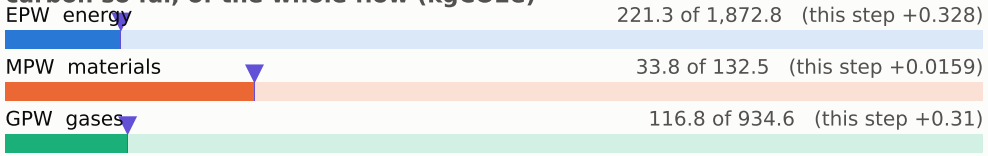

embodied carbon up to each step (kgCO2e per wafer)

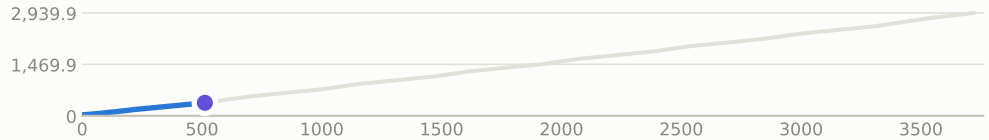

steps by process area

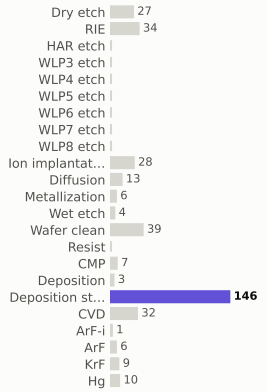

materials deposited (g)

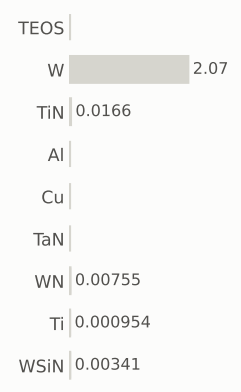

gases emitted (g)

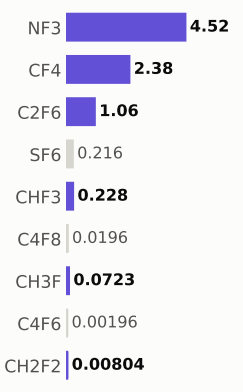

Step #5230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	372.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

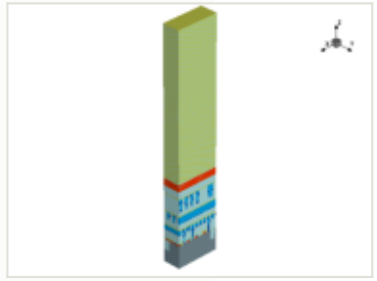

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

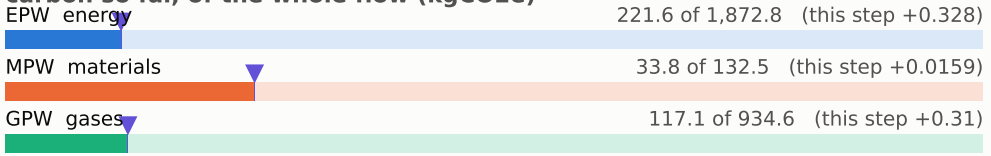

embodied carbon up to each step (kgCO2e per wafer)

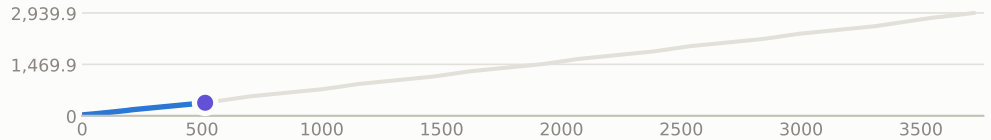

x cut at 0.000 µm

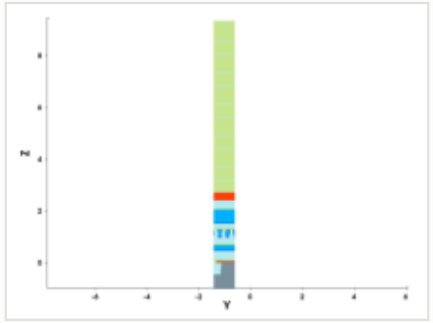

y cut at -1.035 µm

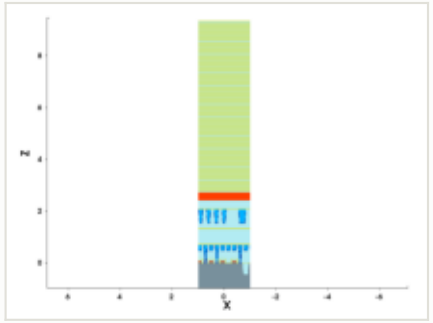

mask for this step

no mask for this step

steps by process area

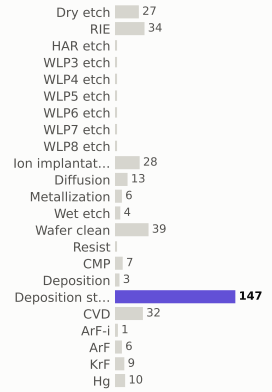

materials deposited (g)

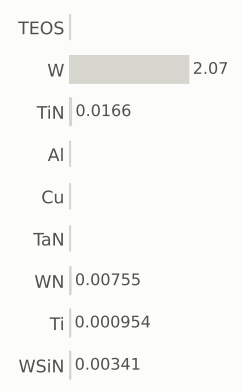

gases emitted (g)

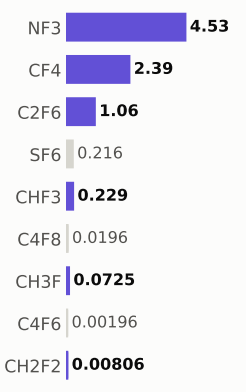

Step #5240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	373.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

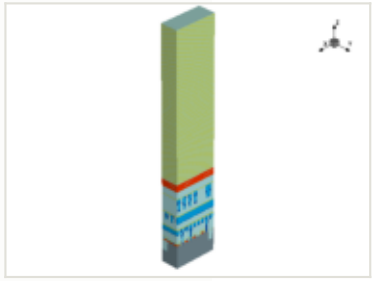

x cut at 0.000 µm

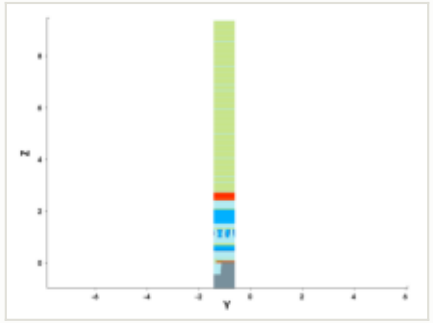

y cut at -1.035 µm

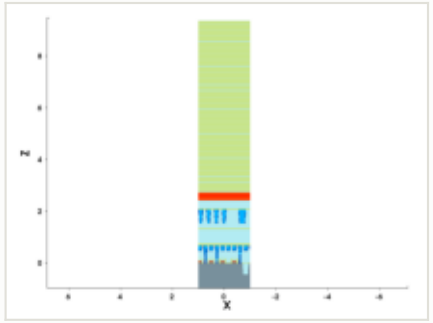

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

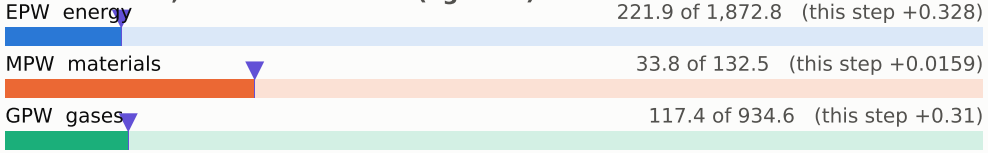

embodied carbon up to each step (kgCO2e per wafer)

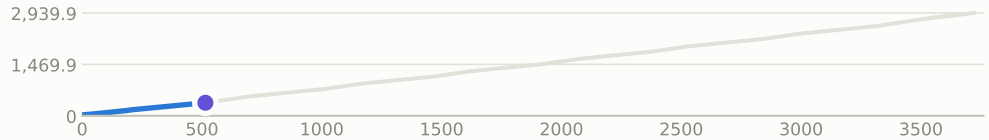

steps by process area

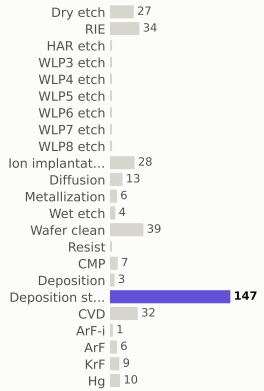

materials deposited (g)

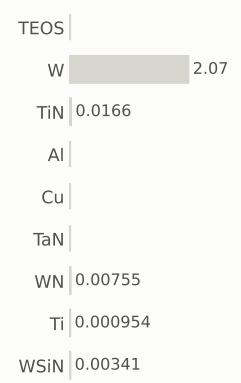

gases emitted (g)

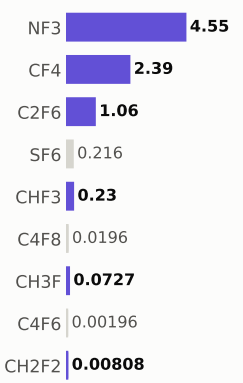

Step #5250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	373.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

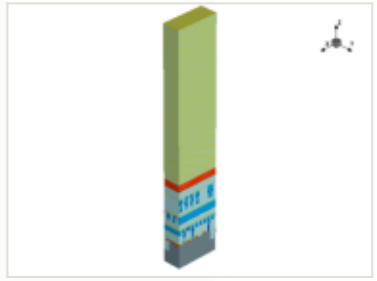

x cut at 0.000 µm

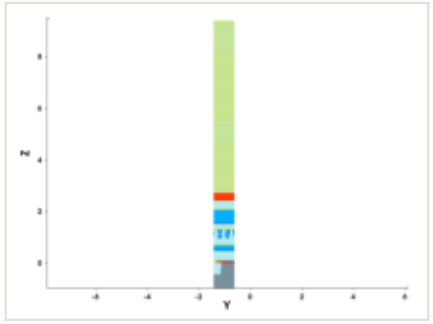

y cut at -1.035 µm

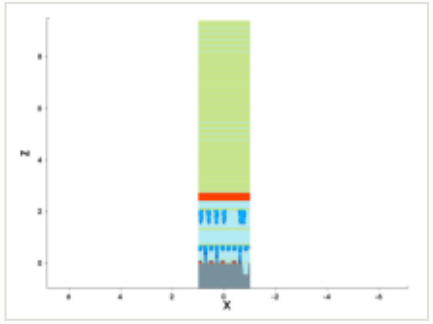

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

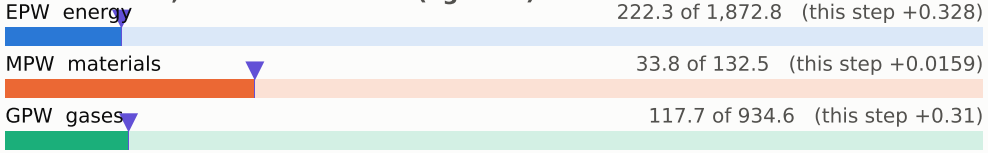

embodied carbon up to each step (kgCO2e per wafer)

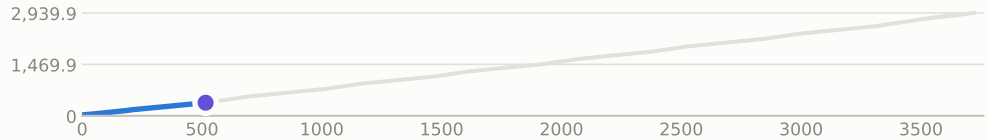

steps by process area

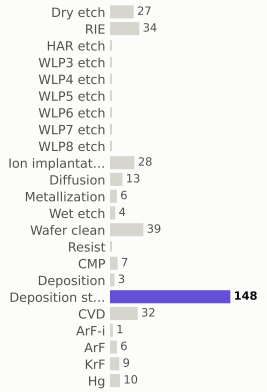

materials deposited (g)

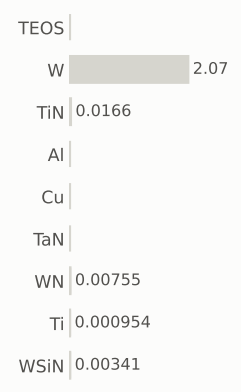

gases emitted (g)

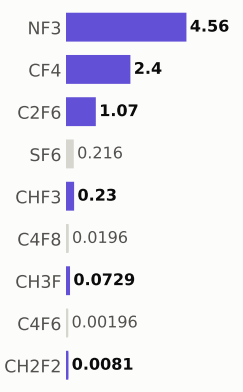

Step #5260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	374.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

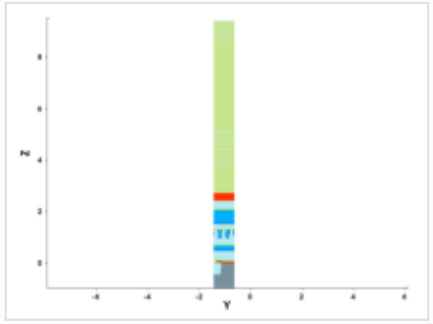

y cut at -1.035 µm

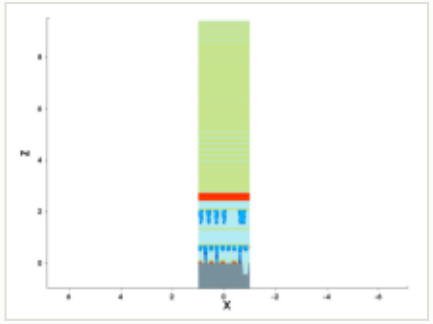

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

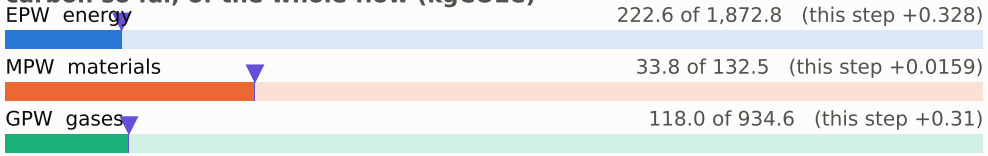

embodied carbon up to each step (kgCO2e per wafer)

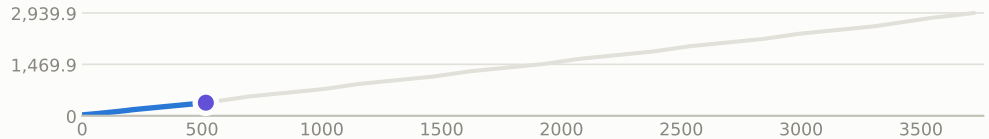

steps by process area

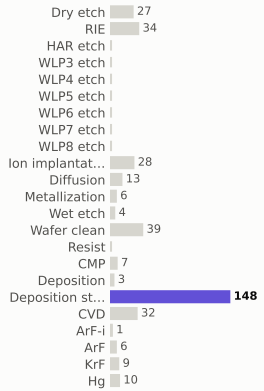

materials deposited (g)

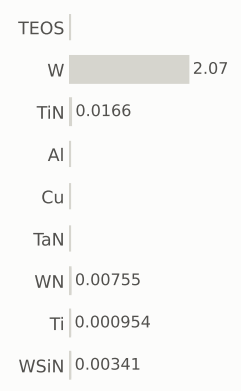

gases emitted (g)

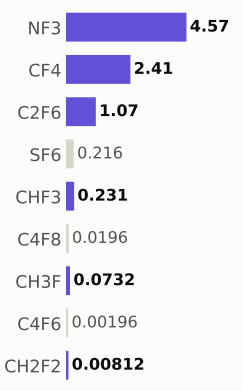

Step #5270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	375.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

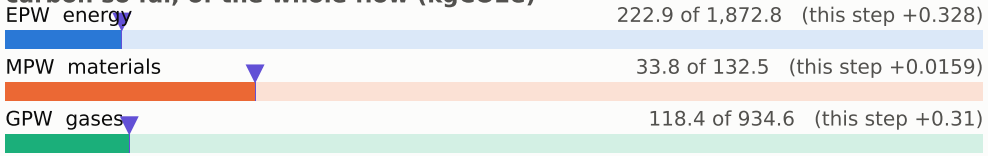

embodied carbon up to each step (kgCO2e per wafer)

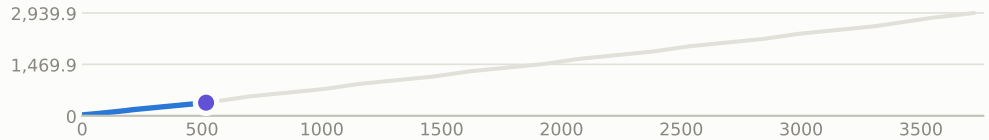

x cut at 0.000 µm

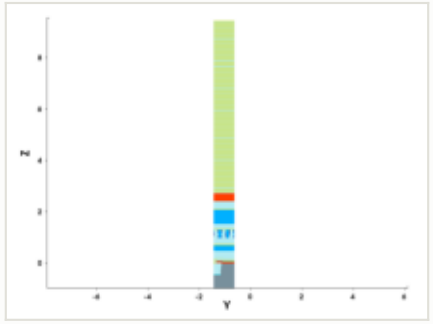

y cut at -1.035 µm

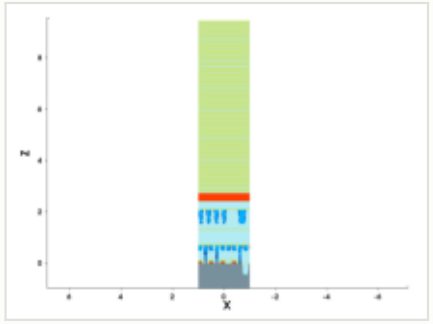

mask for this step

no mask for this step

steps by process area

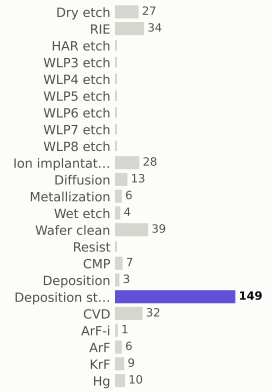

materials deposited (g)

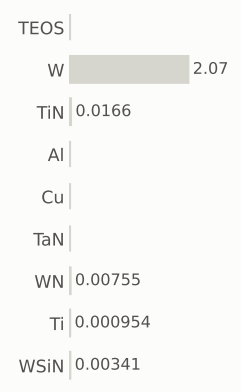

gases emitted (g)

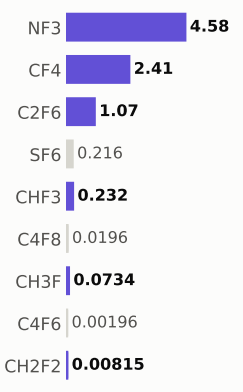

Step #5280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	375.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

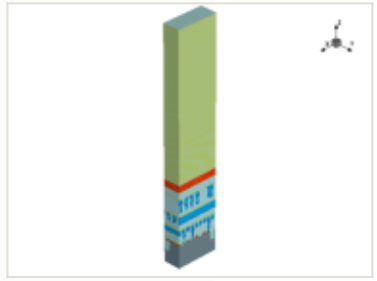

x cut at 0.000 µm

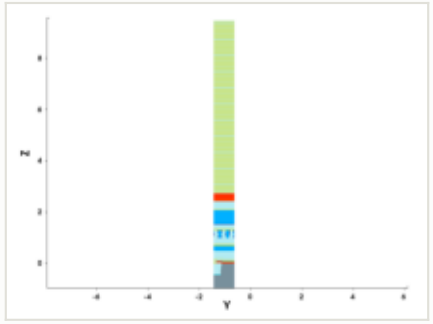

y cut at -1.035 µm

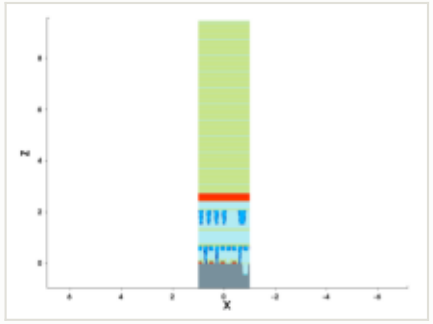

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

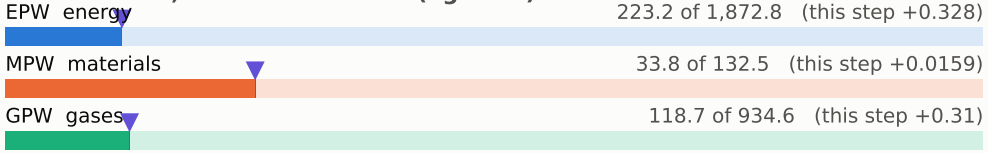

embodied carbon up to each step (kgCO2e per wafer)

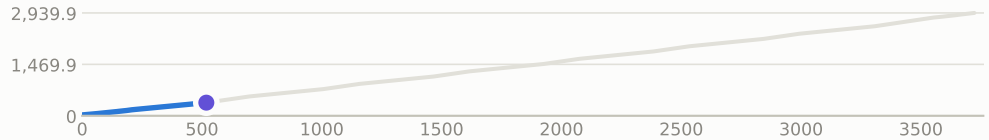

steps by process area

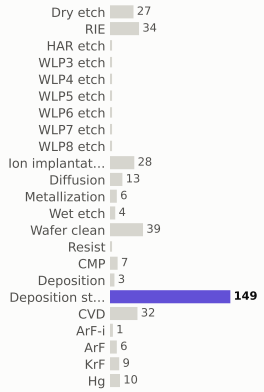

materials deposited (g)

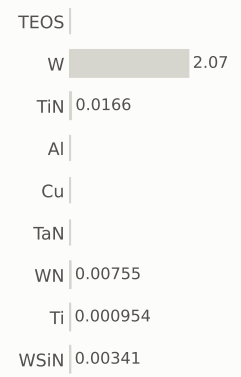

gases emitted (g)

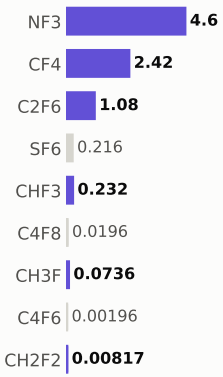

Step #5290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	376.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

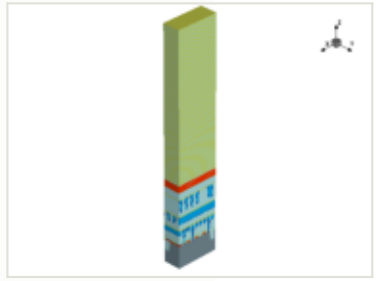

x cut at 0.000 µm

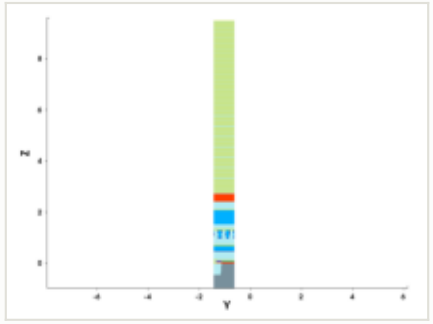

y cut at -1.035 µm

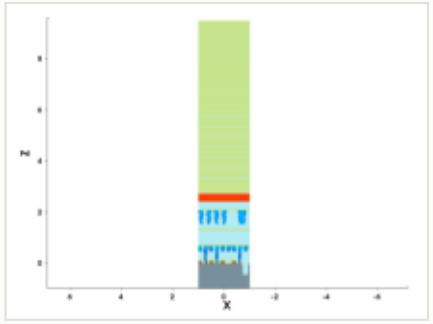

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

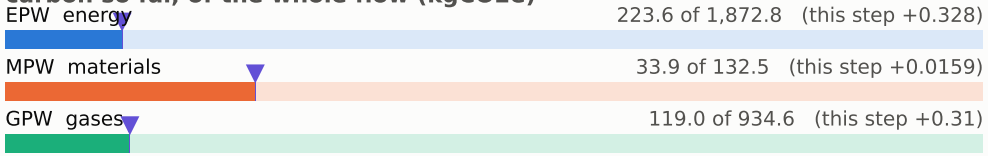

embodied carbon up to each step (kgCO2e per wafer)

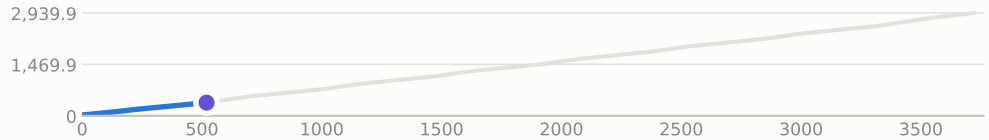

steps by process area

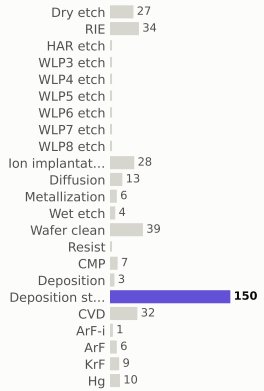

materials deposited (g)

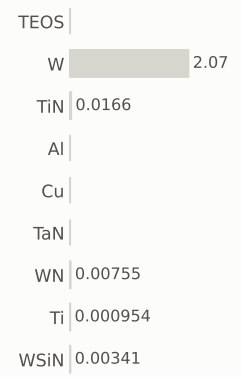

gases emitted (g)

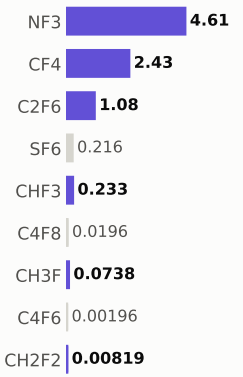

Step #5300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	377.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

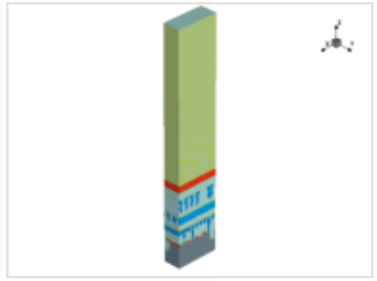

x cut at 0.000 µm

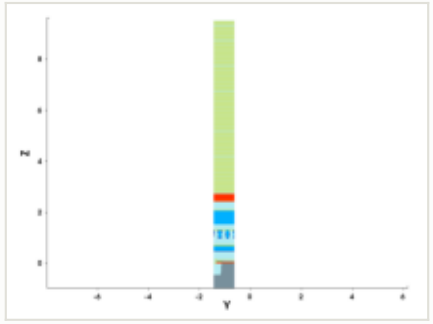

y cut at -1.035 µm

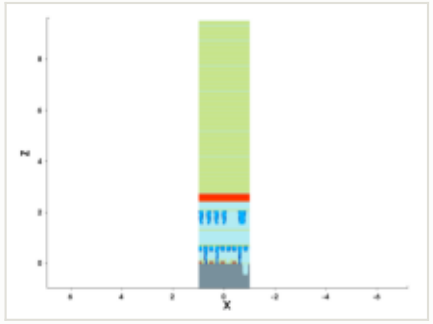

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.025 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

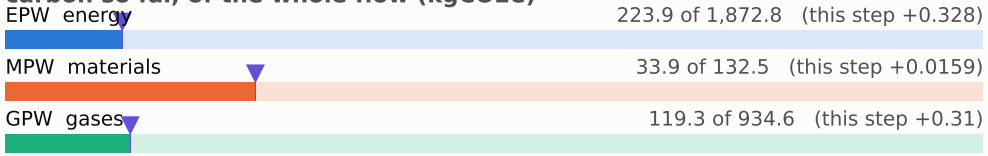

embodied carbon up to each step (kgCO2e per wafer)

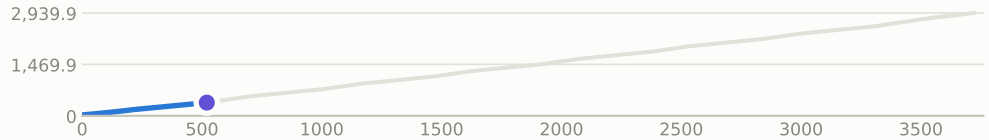

steps by process area

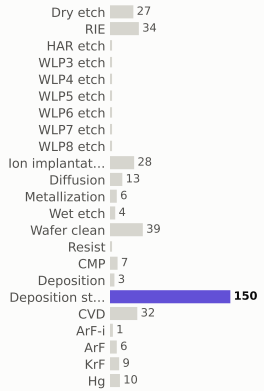

materials deposited (g)

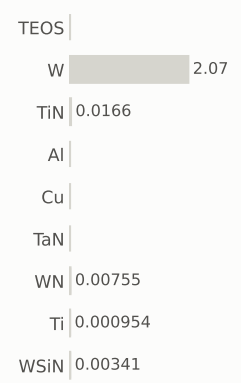

gases emitted (g)

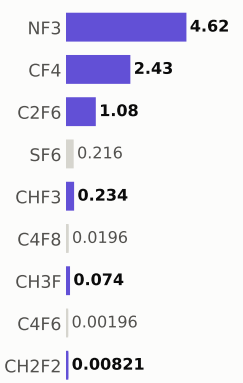

Step #5310: CVD

depo_isotropic · CVD

1.31	378.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

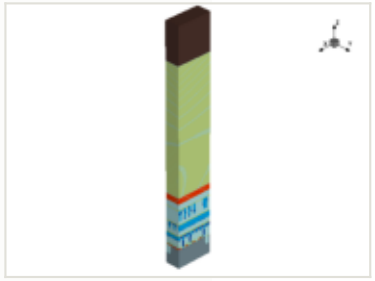

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	2 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy 224.6 of 1,872.8 (this step +0.656)

MPW materials 33.9 of 132.5 (this step +0.0318)

GPW gases 119.9 of 934.6 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)

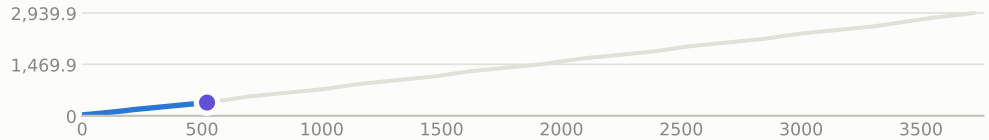

x cut at 0.000 µm

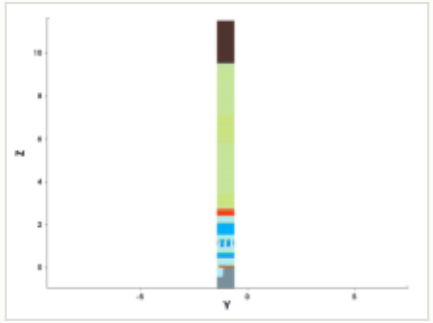

y cut at -1.035 µm

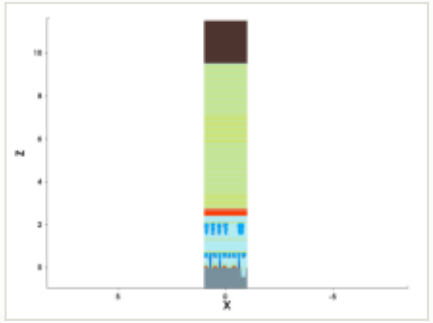

mask for this step

no mask for this step

steps by process area

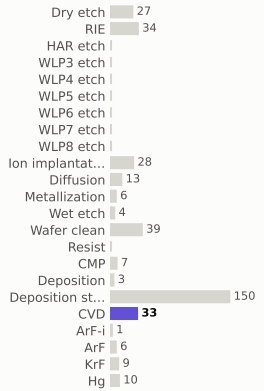

materials deposited (g)

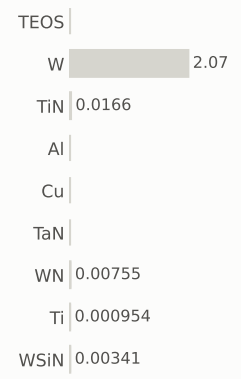

gases emitted (g)

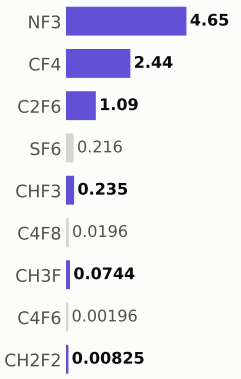

Step #5320: CVD

depo_isotropic · CVD

1.31	379.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

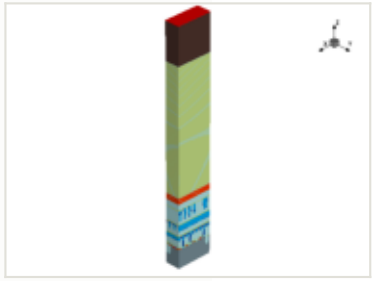

x cut at 0.000 µm

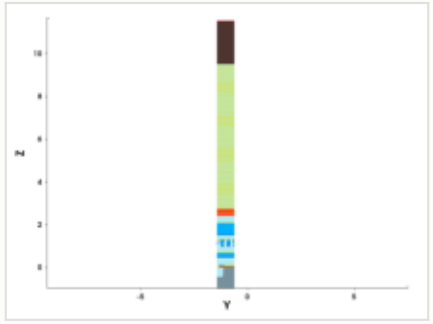

y cut at -1.035 µm

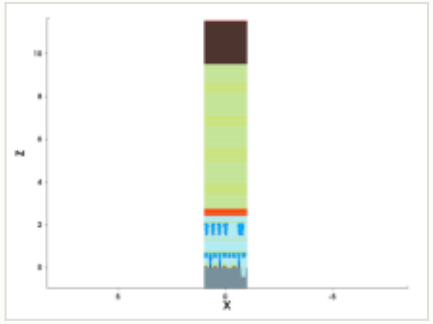

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 225.2 of 1,872.8 (this step +0.656)

MPW materials — 33.9 of 132.5 (this step +0.0318)

GPW gases — 120.5 of 934.6 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)

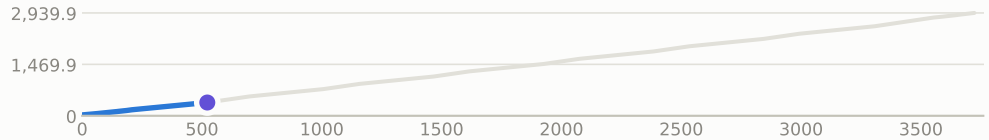

steps by process area



materials deposited (g)

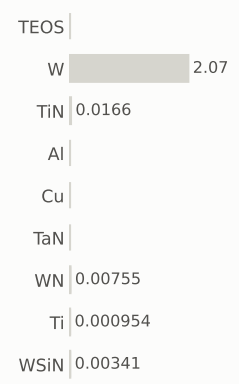

gases emitted (g)

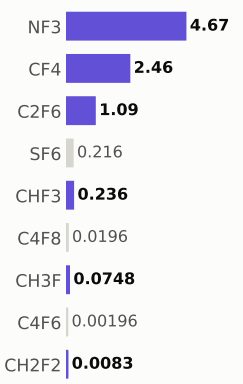

Step #5330: Wafer_clean

clean · Wafer_clean

0.169	379.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

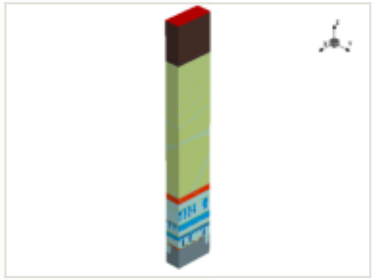

x cut at 0.000 µm

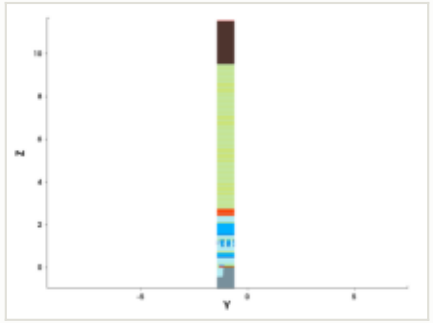

y cut at -1.035 µm

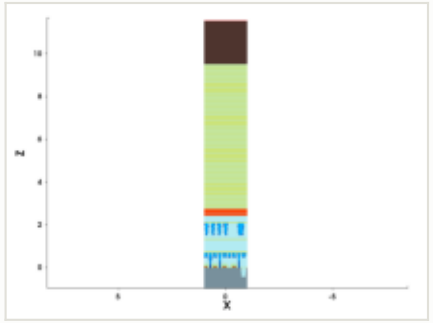

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

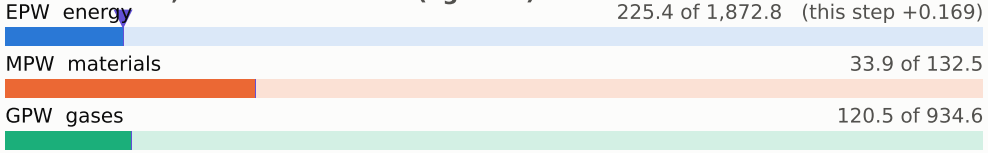

embodied carbon up to each step (kgCO2e per wafer)

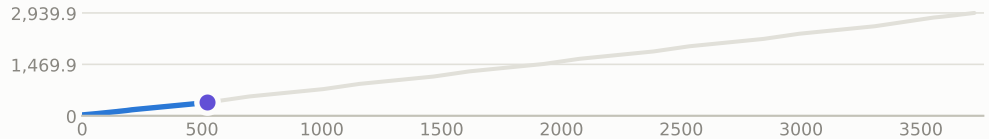

steps by process area

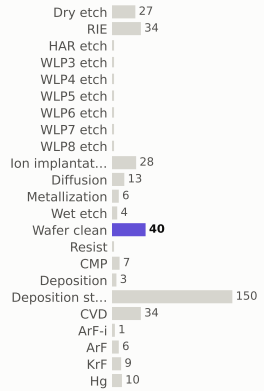

materials deposited (g)

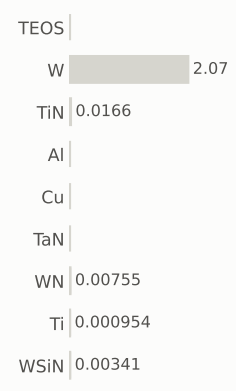

gases emitted (g)

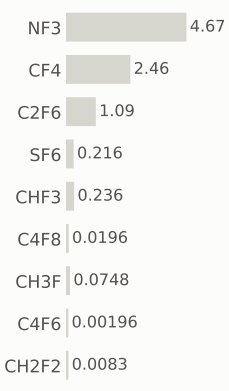

Step #5340: ArF-i

litho_patterning · ArF-i

0.217	380.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

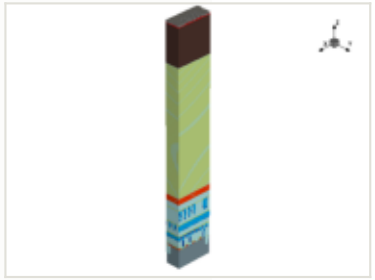

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

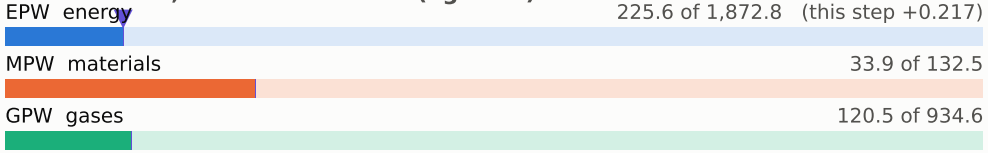

embodied carbon up to each step (kgCO2e per wafer)

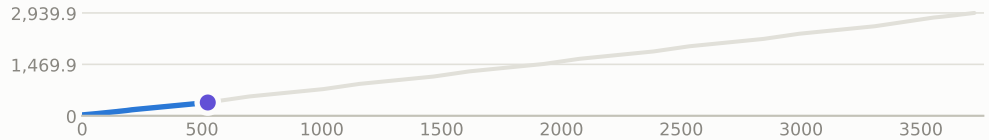

x cut at 0.000 µm

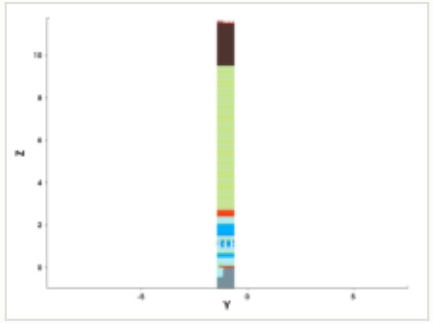

y cut at -1.035 µm

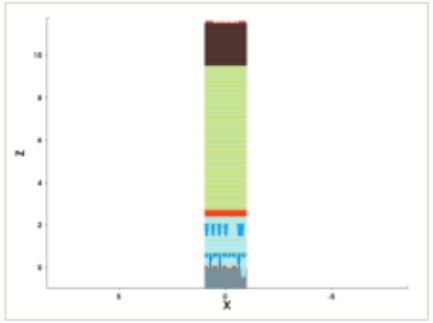

mask: layer 27:0 (OASIS)

steps by process area

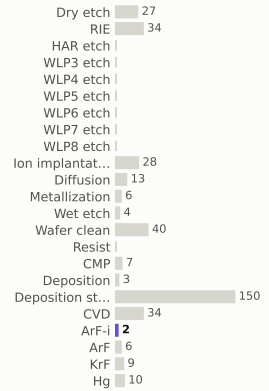

materials deposited (g)

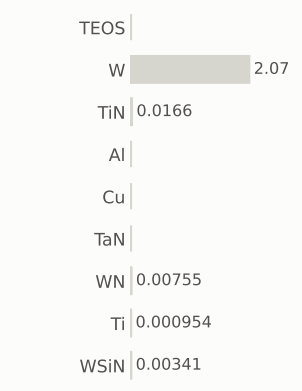

gases emitted (g)

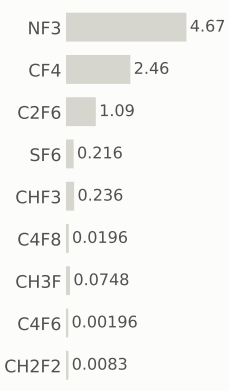

Step #5350: RIE

etch_anisotropic · RIE

1.04	381.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

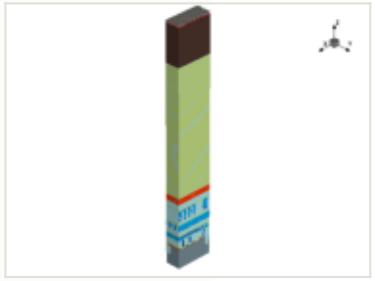

x cut at 0.000 µm

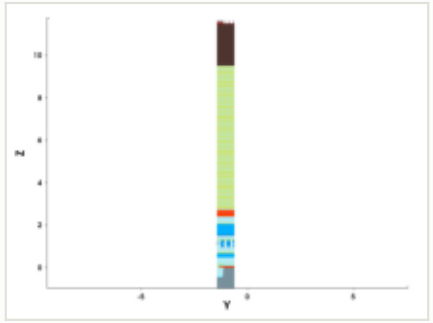

y cut at -1.035 µm

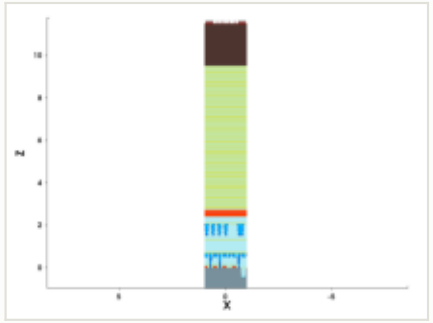

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

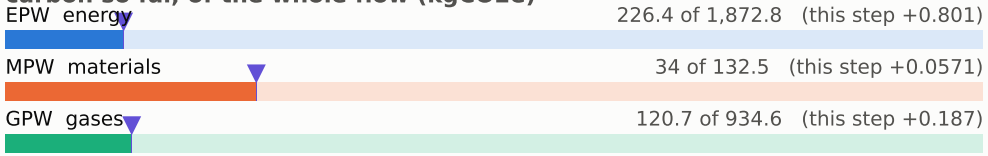

embodied carbon up to each step (kgCO2e per wafer)

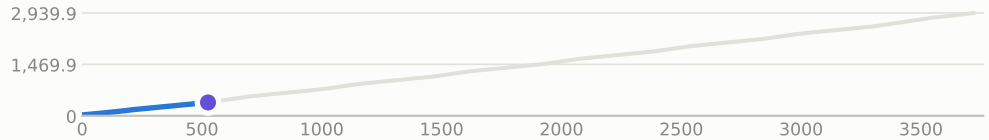

steps by process area

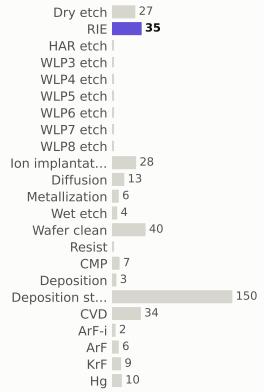

materials deposited (g)

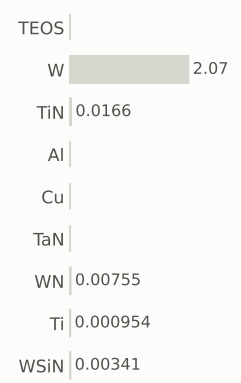

gases emitted (g)

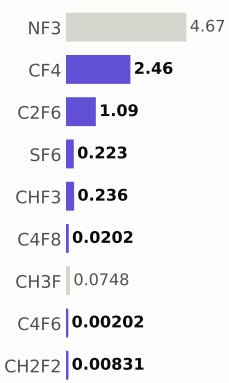

Step #5360: RIE

etch_anisotropic · RIE

1.04	382.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

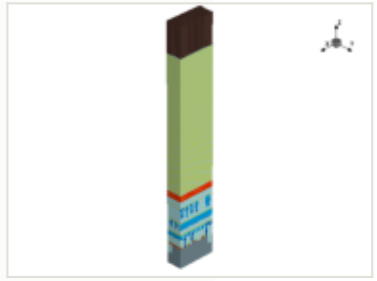

x cut at 0.000 µm

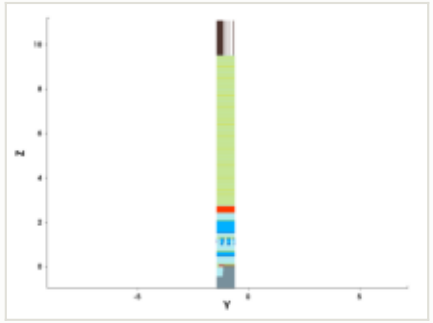

y cut at -1.035 µm

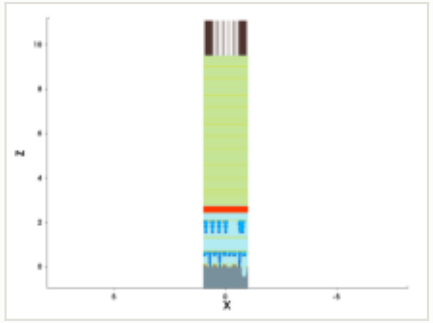

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

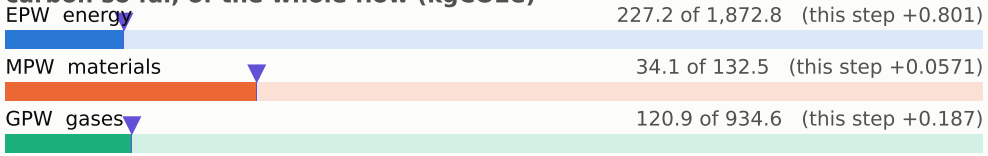

embodied carbon up to each step (kgCO2e per wafer)

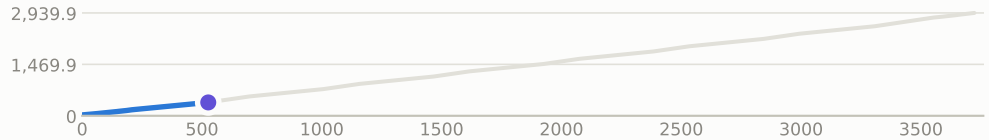

steps by process area

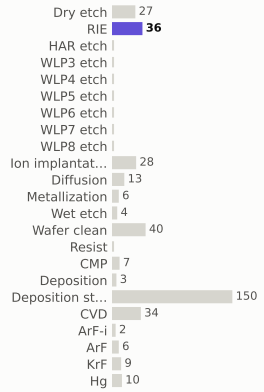

materials deposited (g)

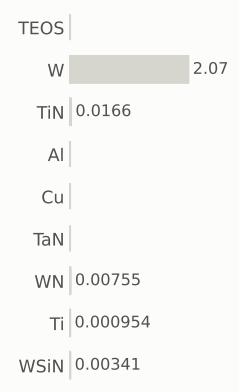

gases emitted (g)

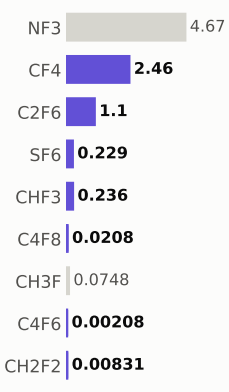

Step #5370: HAR_etch

etch_anisotropic · HAR_etch

1.04	383.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

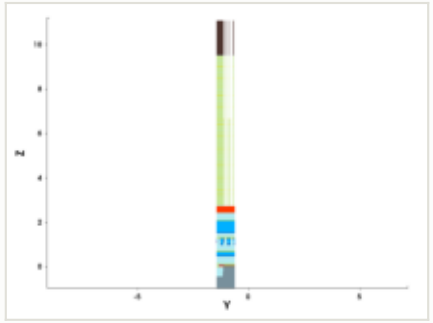

y cut at -1.035 µm

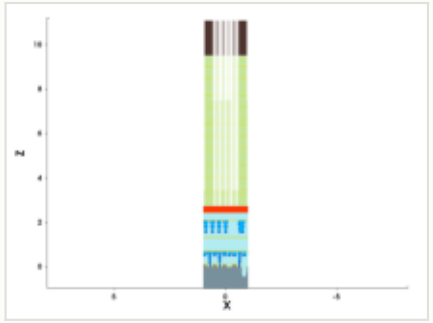

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

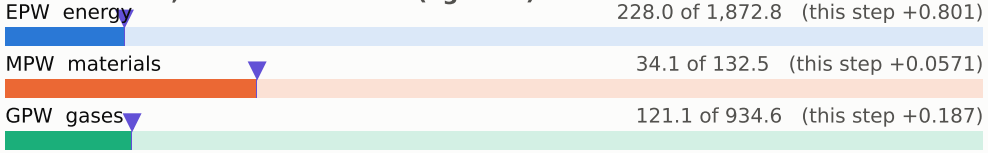

embodied carbon up to each step (kgCO2e per wafer)

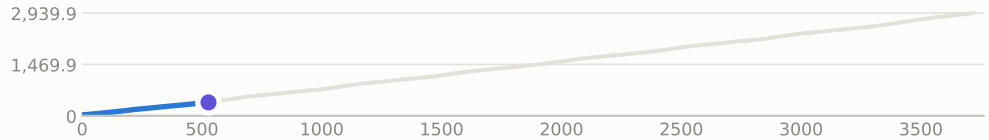

steps by process area

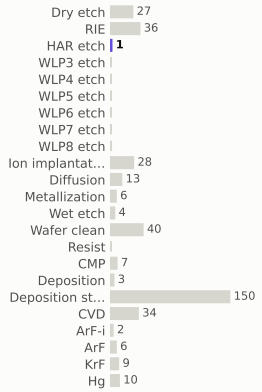

materials deposited (g)

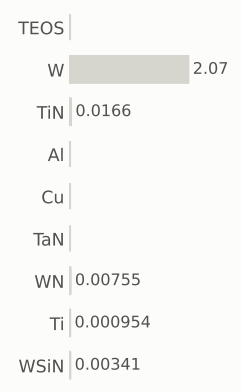

gases emitted (g)

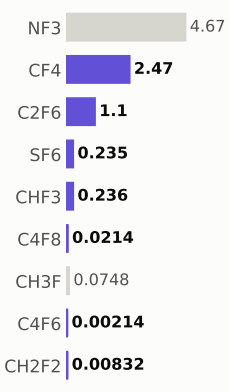

Step #5370.0667: HAR_etch

etch_noop · HAR_etch

1.04	384.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

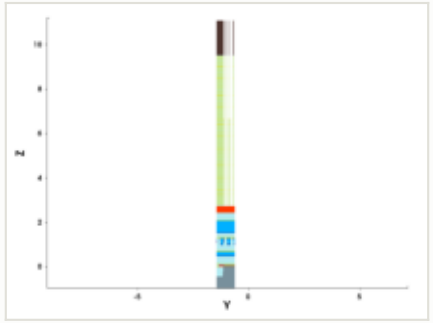

y cut at -1.035 µm

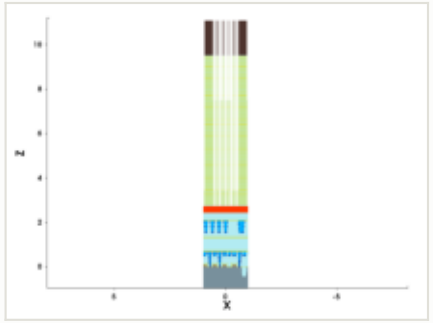

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

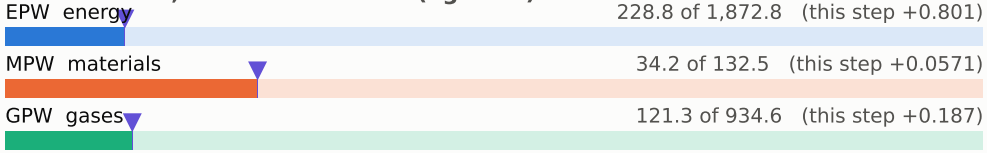

embodied carbon up to each step (kgCO2e per wafer)

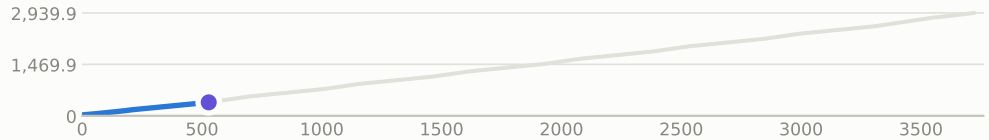

steps by process area

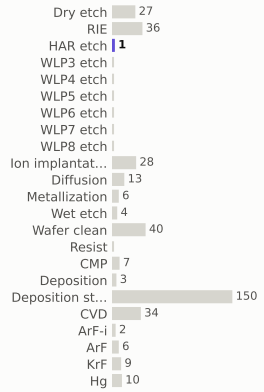

materials deposited (g)

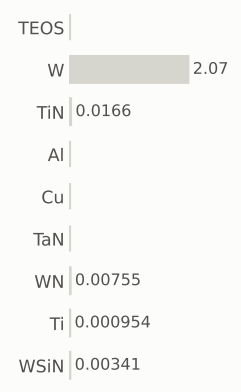

gases emitted (g)

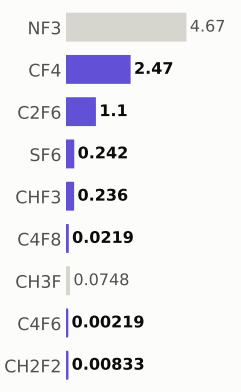

Step #5370.1333: HAR_etch

etch_noop · HAR_etch

1.04	385.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

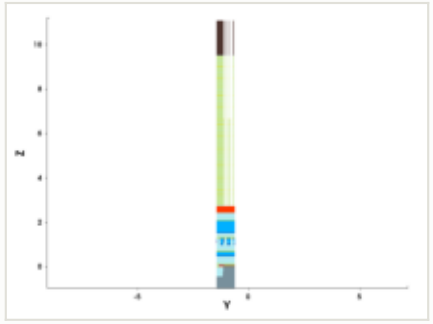

y cut at -1.035 µm

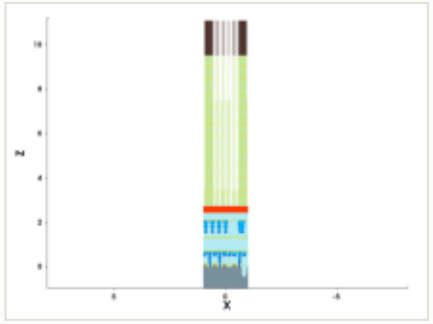

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

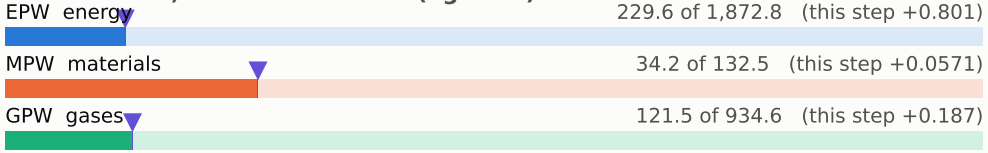

embodied carbon up to each step (kgCO2e per wafer)

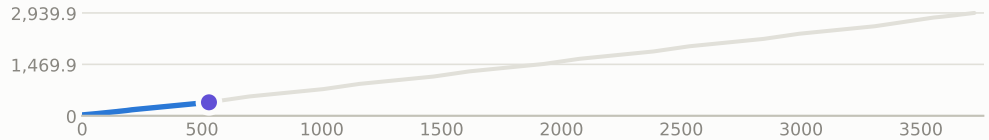

steps by process area

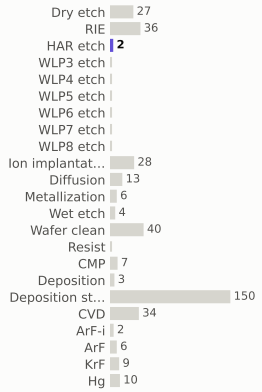

materials deposited (g)

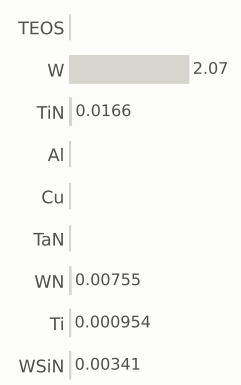

gases emitted (g)

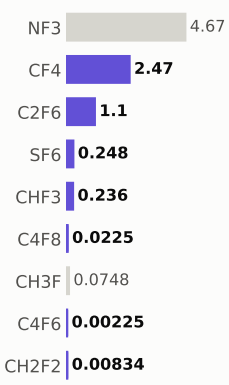

Step #5370.2: HAR_etch

etch_noop · HAR_etch

1.04	386.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

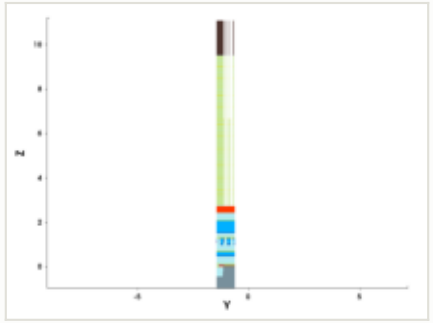

y cut at -1.035 µm

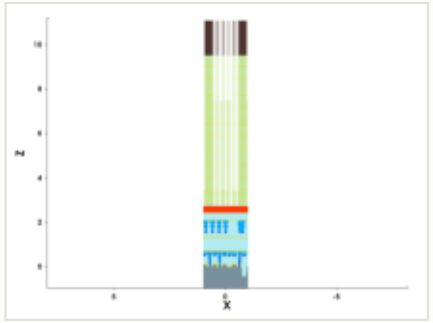

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

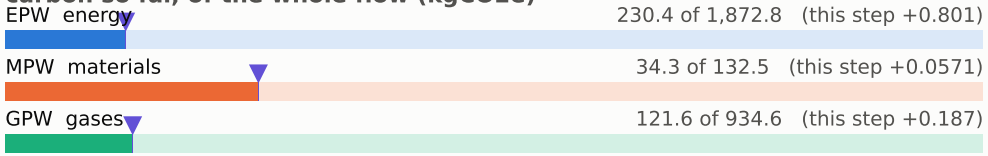

embodied carbon up to each step (kgCO2e per wafer)

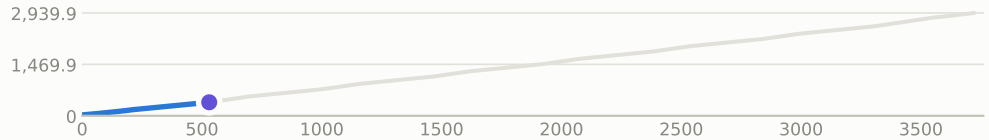

steps by process area

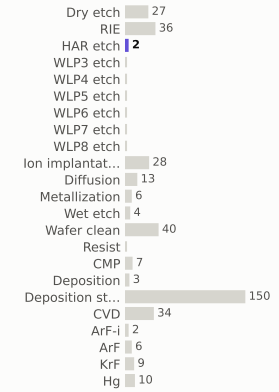

materials deposited (g)

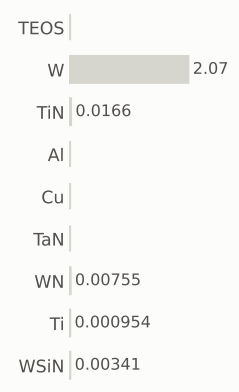

gases emitted (g)

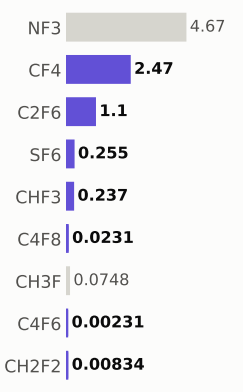

Step #5370.2667: HAR_etch

etch_noop · HAR_etch

1.04	387.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

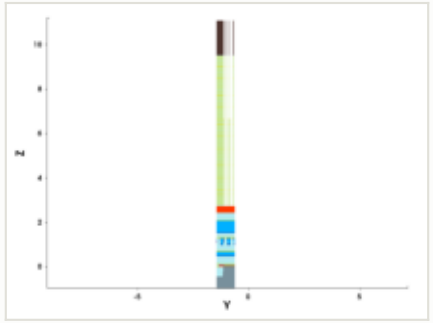

y cut at -1.035 µm

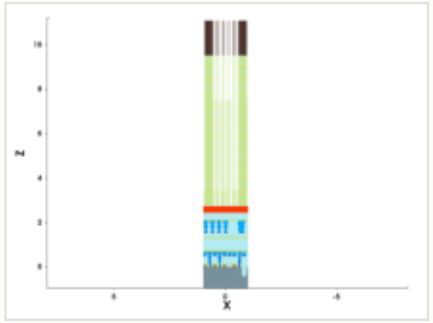

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

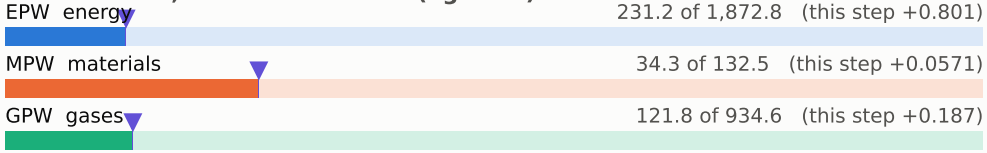

embodied carbon up to each step (kgCO2e per wafer)

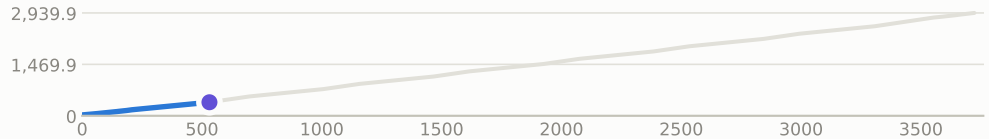

steps by process area

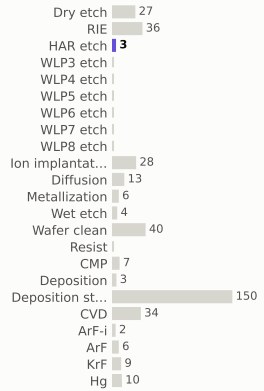

materials deposited (g)

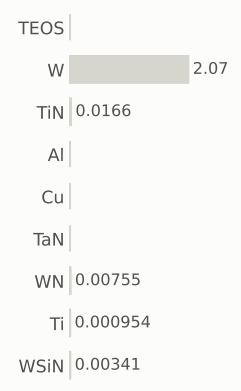

gases emitted (g)

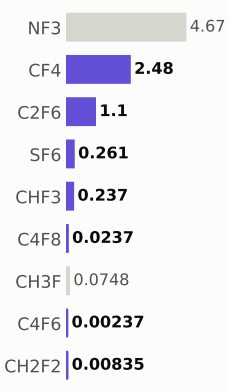

Step #5370.3333: HAR_etch

etch_noop · HAR_etch

1.04	388.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

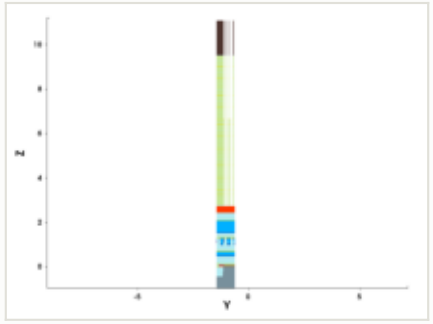

y cut at -1.035 µm

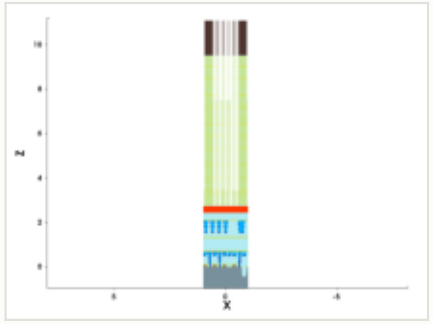

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

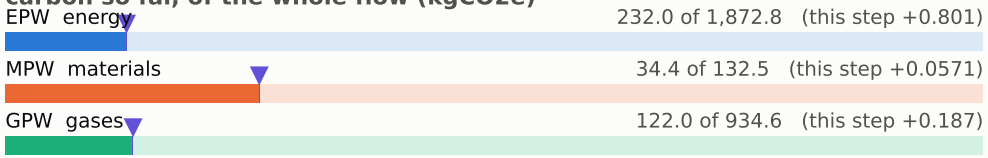

embodied carbon up to each step (kgCO2e per wafer)

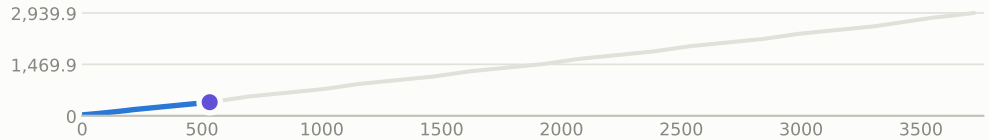

steps by process area

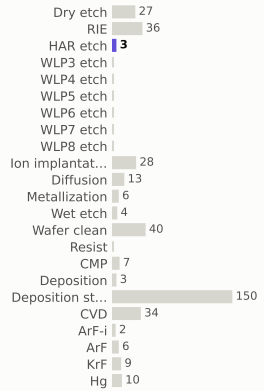

materials deposited (g)

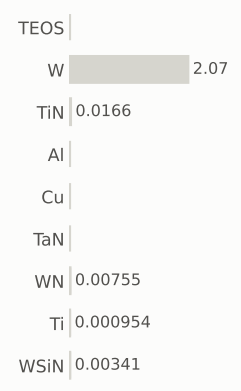

gases emitted (g)

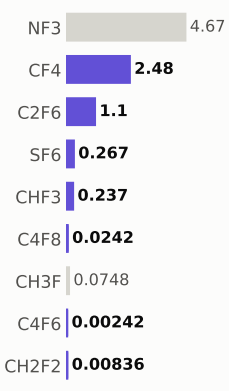

Step #5370.4: HAR_etch

etch_noop · HAR_etch

1.04	389.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

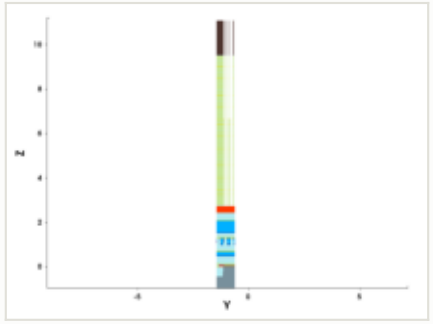

y cut at -1.035 µm

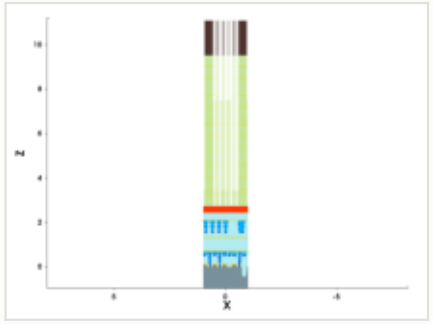

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

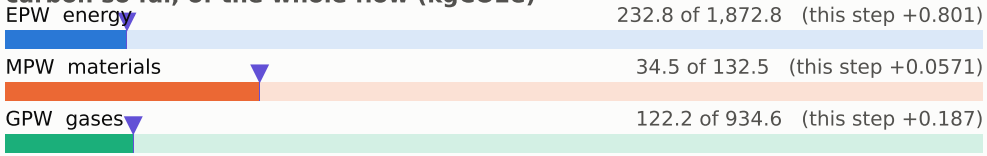

embodied carbon up to each step (kgCO2e per wafer)

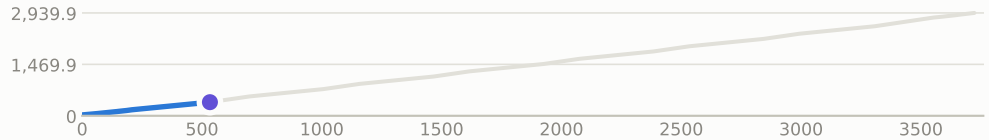

steps by process area

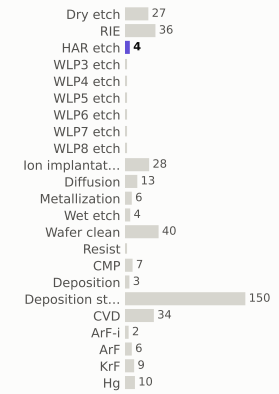

materials deposited (g)

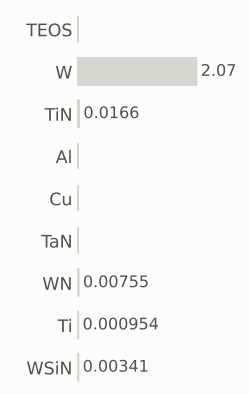

gases emitted (g)

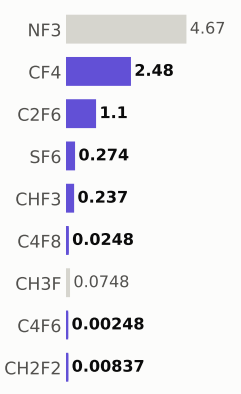

Step #5370.4667: HAR_etch

etch_noop · HAR_etch

1.04	390.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

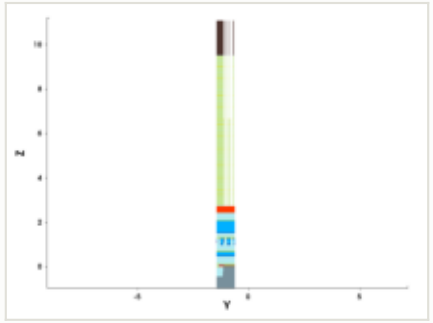

y cut at -1.035 µm

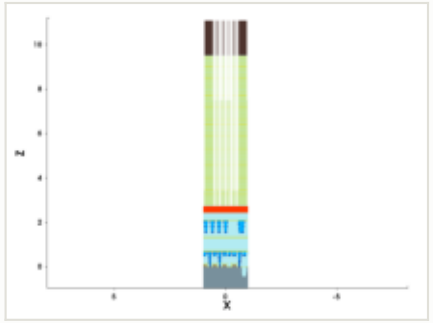

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

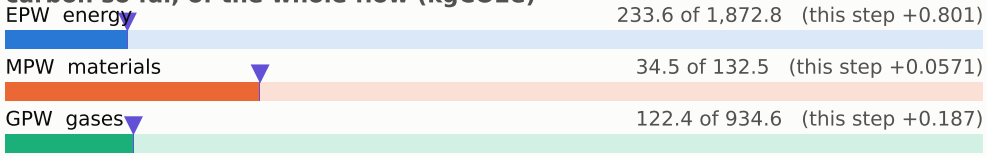

embodied carbon up to each step (kgCO2e per wafer)

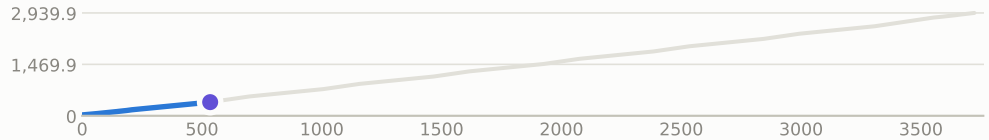

steps by process area

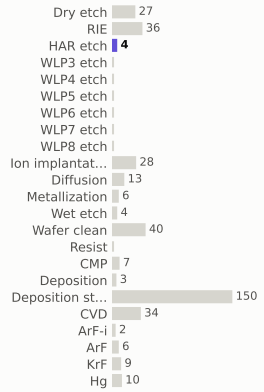

materials deposited (g)

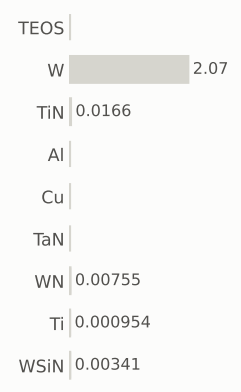

gases emitted (g)

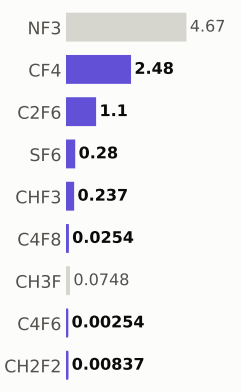

Step #5370.5333: HAR_etch

etch_noop · HAR_etch

1.04	391.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

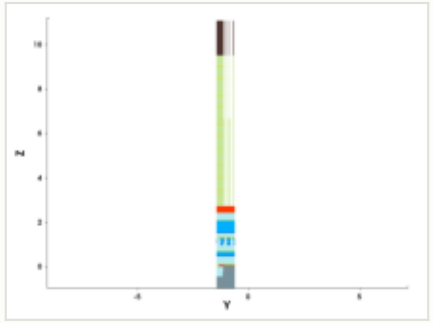

y cut at -1.035 µm

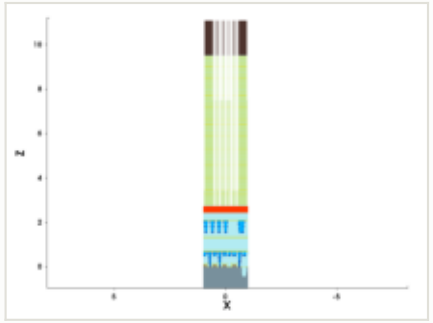

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

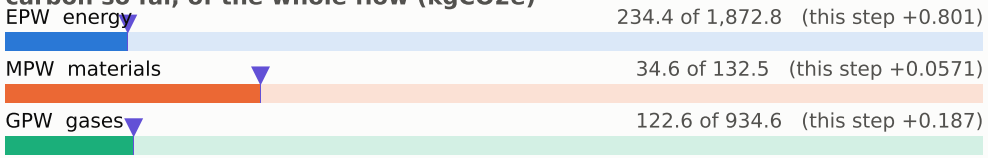

embodied carbon up to each step (kgCO2e per wafer)

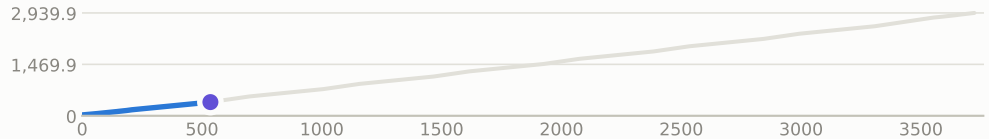

steps by process area

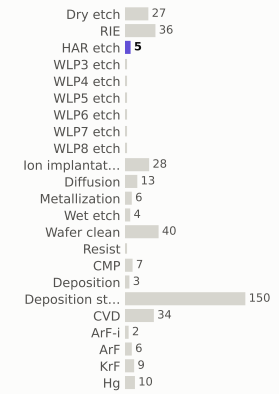

materials deposited (g)



gases emitted (g)

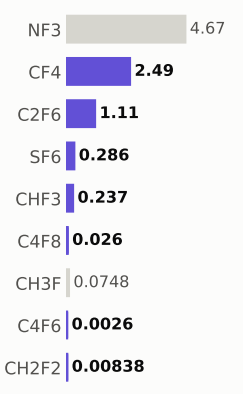

Step #5370.6: HAR_etch

etch_noop · HAR_etch

1.04	392.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

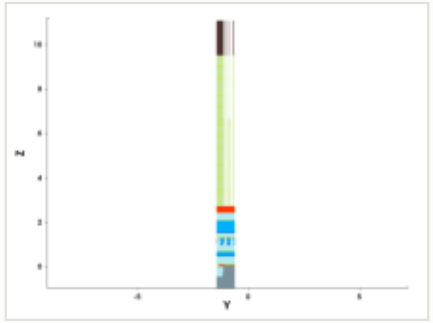

y cut at -1.035 µm

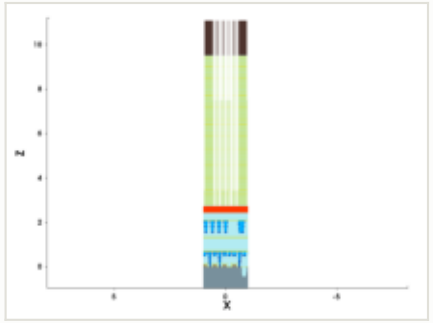

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

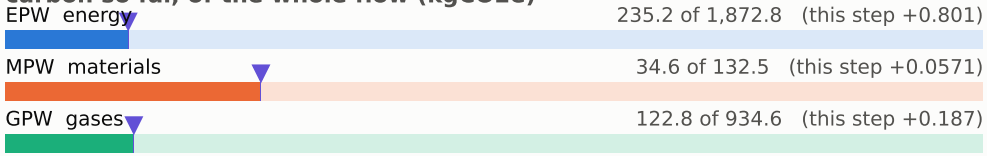

embodied carbon up to each step (kgCO2e per wafer)

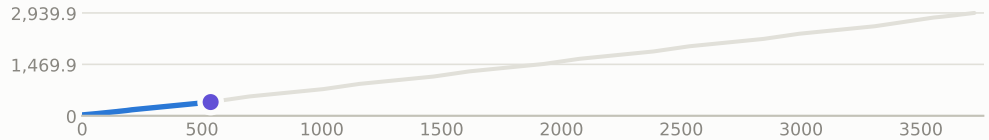

steps by process area

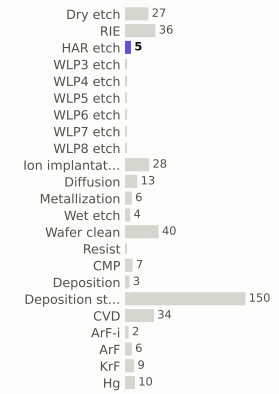

materials deposited (g)

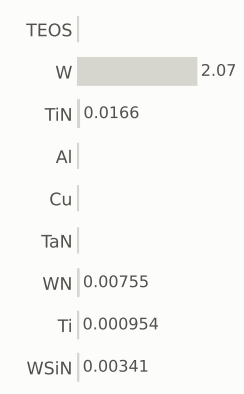

gases emitted (g)

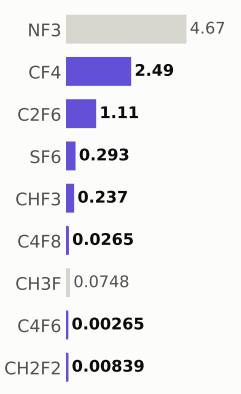

Step #5370.6667: HAR_etch

etch_noop · HAR_etch

1.04	393.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

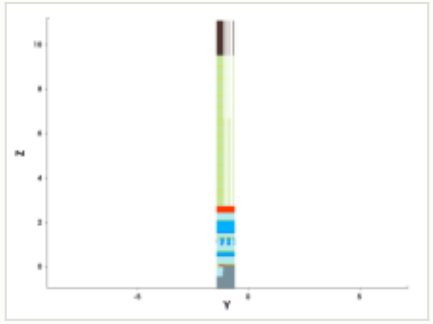

y cut at -1.035 µm

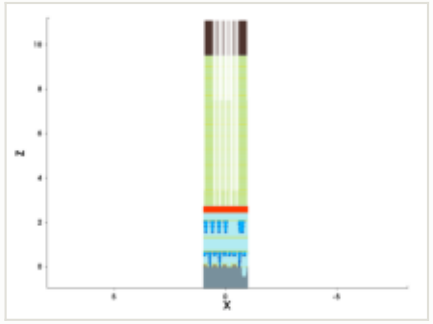

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

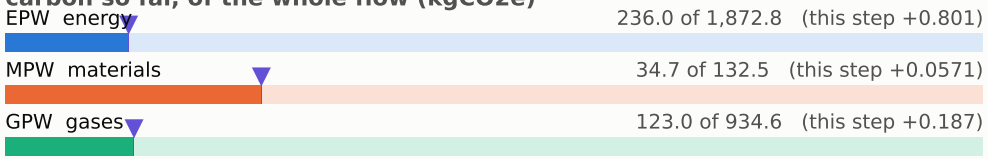

embodied carbon up to each step (kgCO2e per wafer)

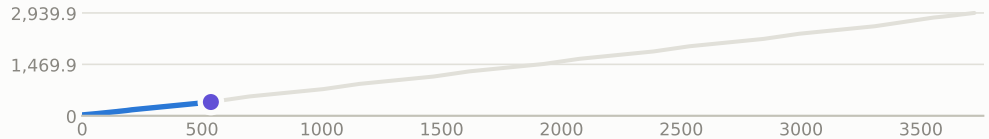

steps by process area

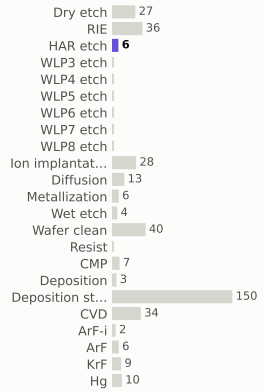

materials deposited (g)

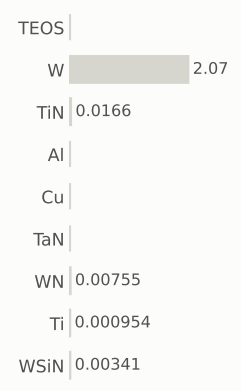

gases emitted (g)

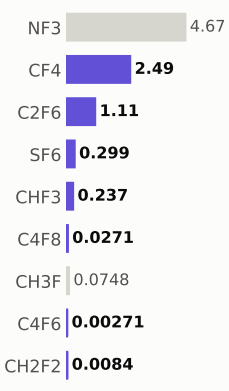

Step #5370.7333: HAR_etch

etch_noop · HAR_etch

1.04	394.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

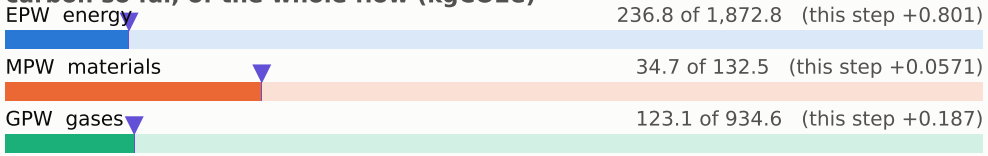

embodied carbon up to each step (kgCO2e per wafer)

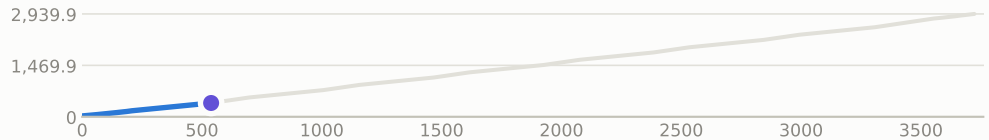

x cut at 0.000 µm

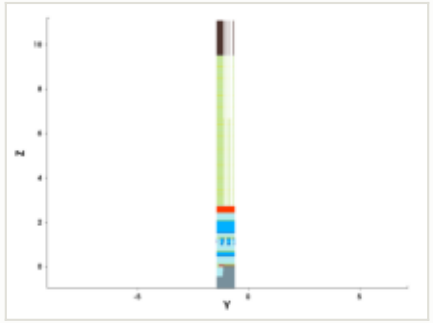

y cut at -1.035 µm

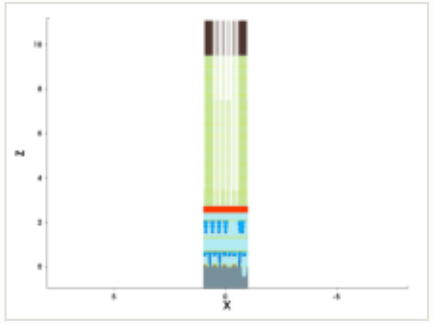

mask for this step

no mask for this step

steps by process area

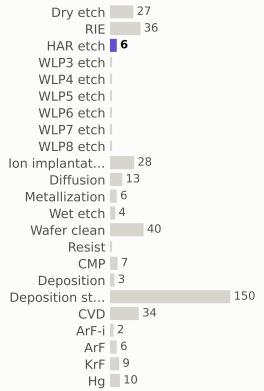

materials deposited (g)

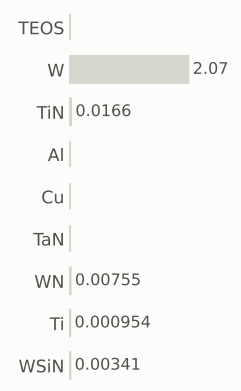

gases emitted (g)

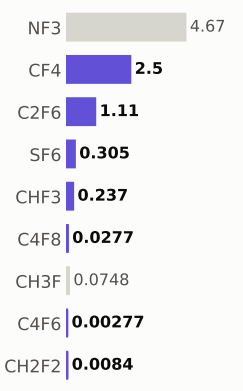

Step #5370.8: HAR_etch

etch_noop · HAR_etch

1.04	395.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

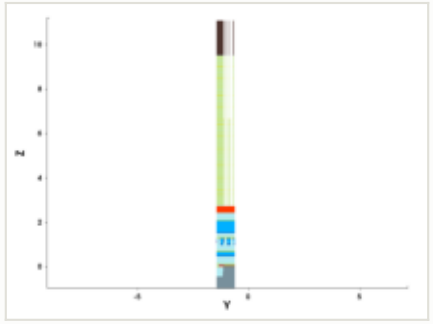

y cut at -1.035 µm

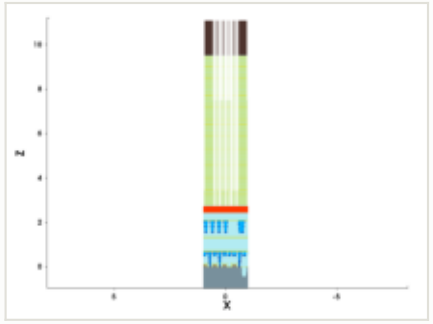

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

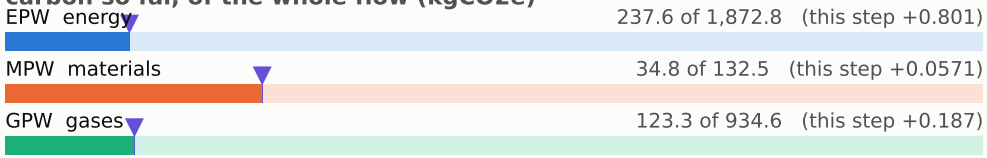

embodied carbon up to each step (kgCO2e per wafer)

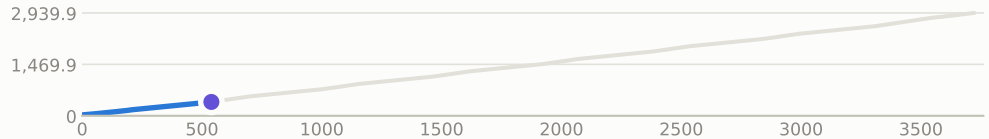

steps by process area

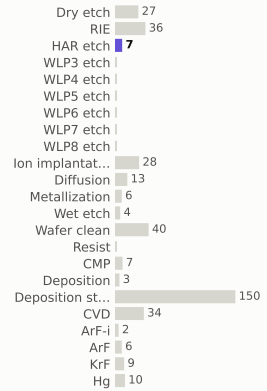

materials deposited (g)

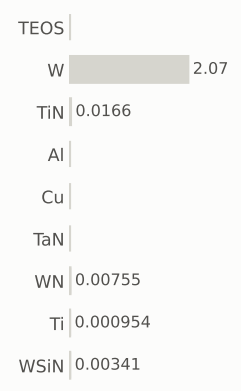

gases emitted (g)

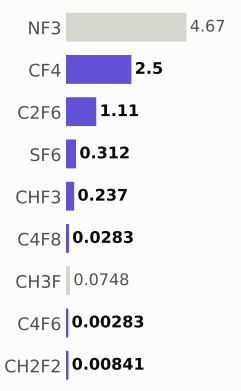

Step #5370.8667: HAR_etch

etch_noop · HAR_etch

1.04	396.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

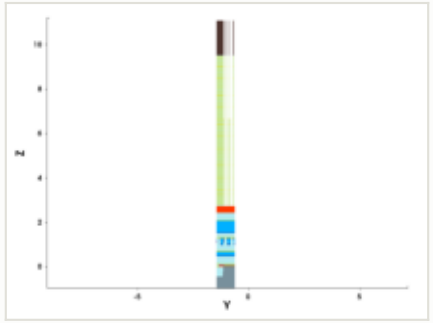

y cut at -1.035 µm

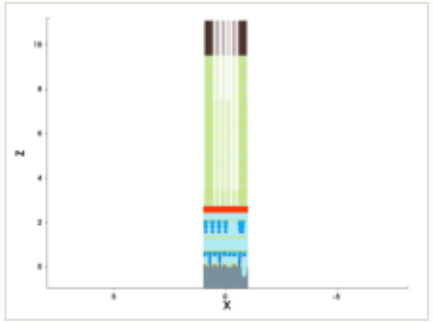

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

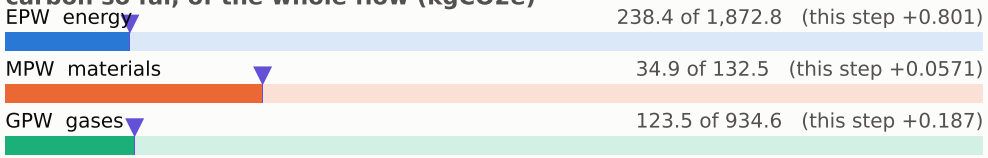

embodied carbon up to each step (kgCO2e per wafer)

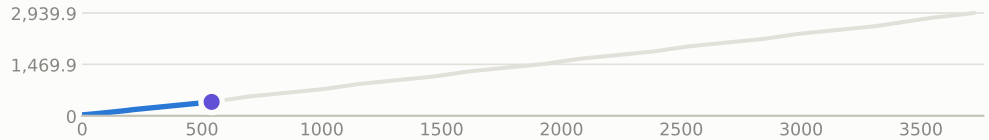

steps by process area

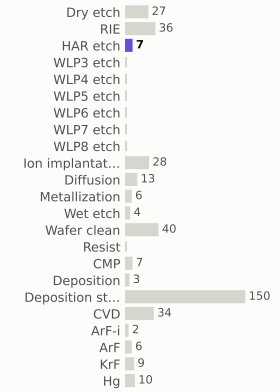

materials deposited (g)

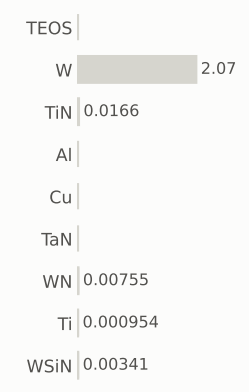

gases emitted (g)

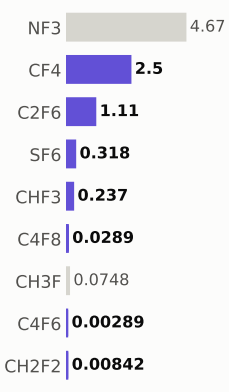

Step #5370.9333: HAR_etch

etch_noop · HAR_etch

1.04	397.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

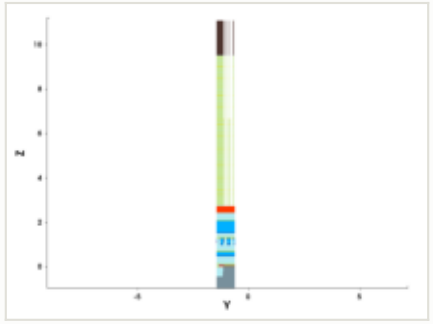

y cut at -1.035 µm

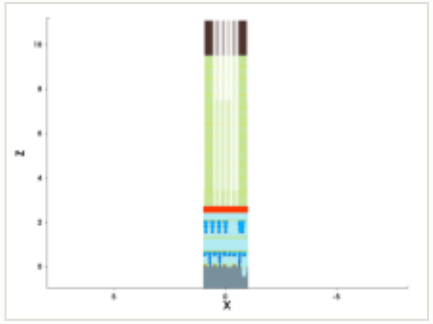

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

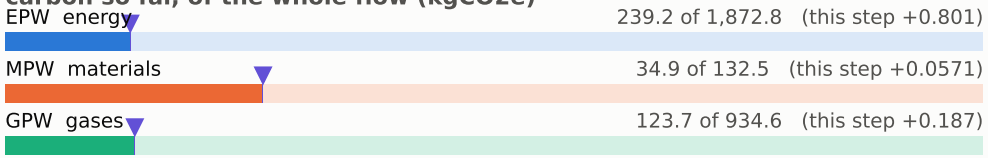

embodied carbon up to each step (kgCO2e per wafer)

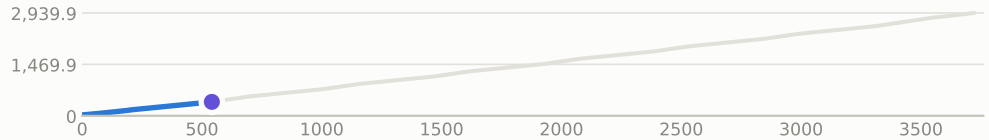

steps by process area

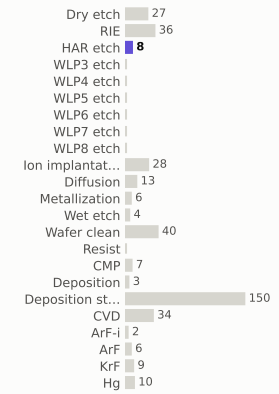

materials deposited (g)

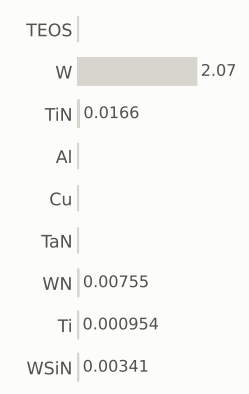

gases emitted (g)

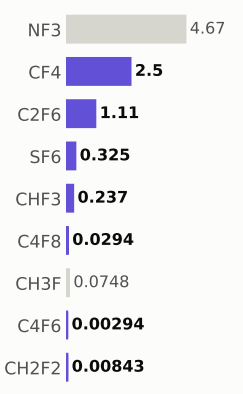

Step #5371: HAR_etch

etch_noop · HAR_etch

1.04	398.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

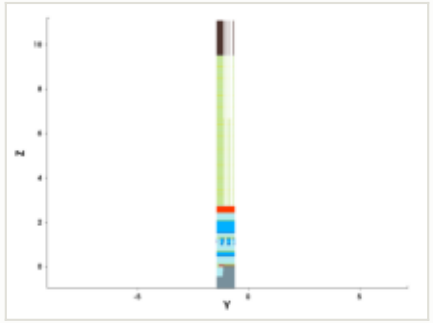

y cut at -1.035 µm

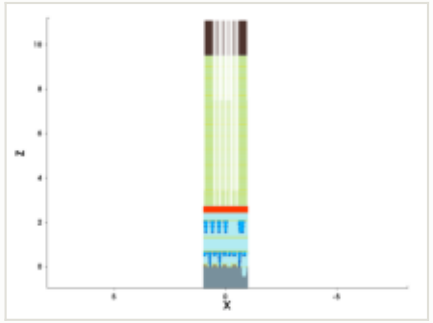

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

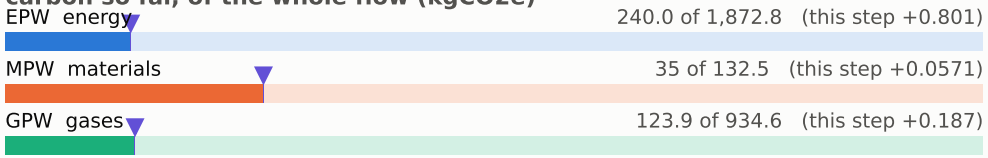

embodied carbon up to each step (kgCO2e per wafer)

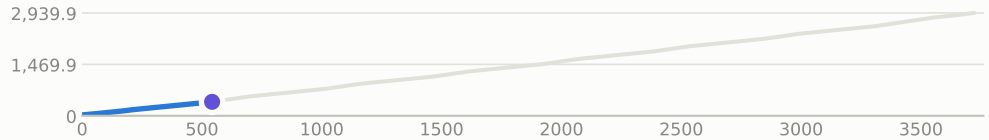

steps by process area

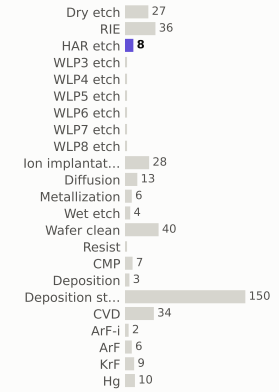

materials deposited (g)

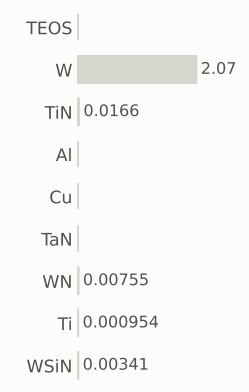

gases emitted (g)

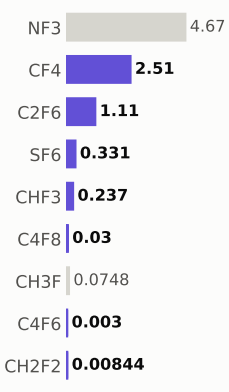

Step #5371.0667: HAR_etch

etch_noop · HAR_etch

1.04	399.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

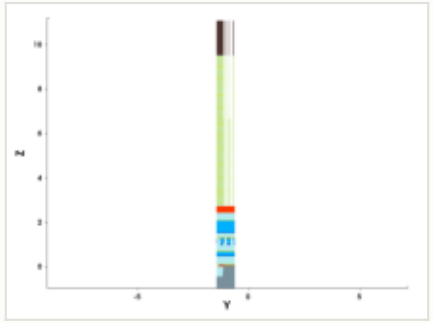

y cut at -1.035 µm

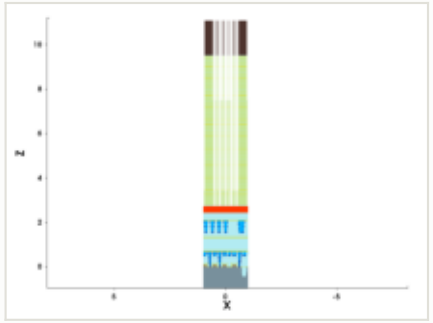

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

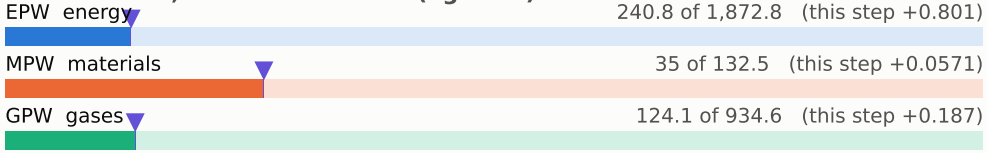

embodied carbon up to each step (kgCO2e per wafer)

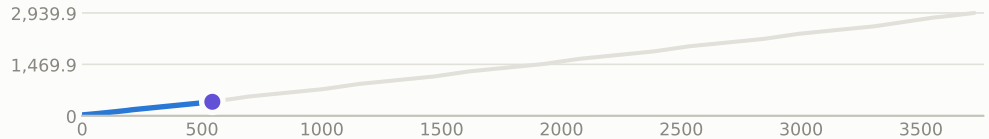

steps by process area

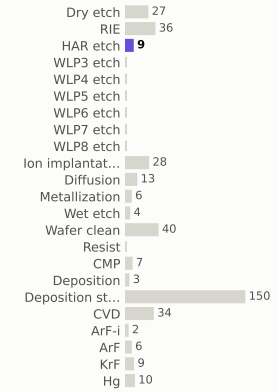

materials deposited (g)

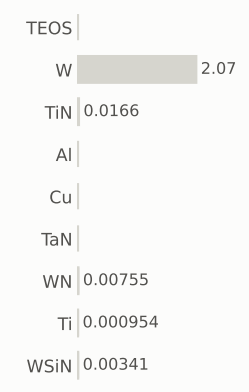

gases emitted (g)

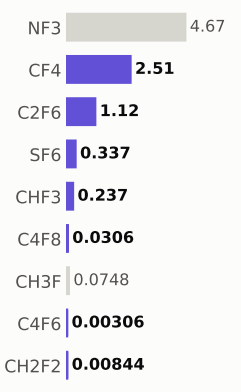

Step #5371.1333: HAR_etch

etch_noop · HAR_etch

1.04	401.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

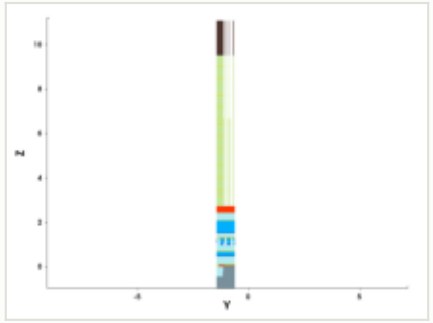

y cut at -1.035 µm

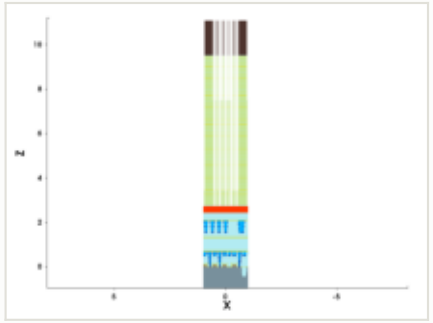

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

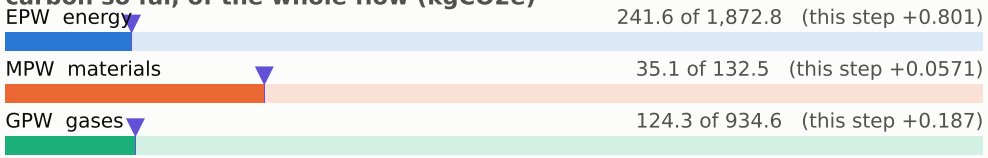

embodied carbon up to each step (kgCO2e per wafer)

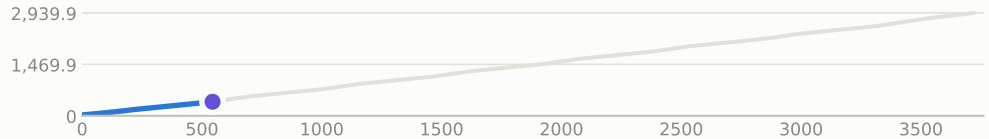

steps by process area

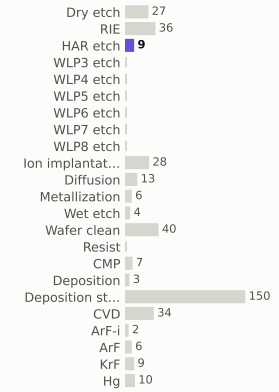

materials deposited (g)

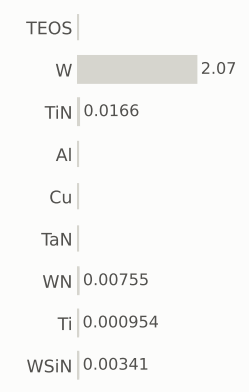

gases emitted (g)

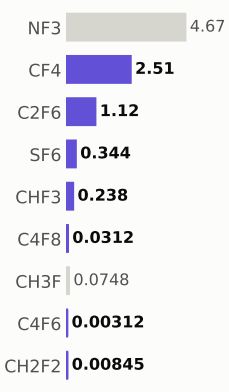

Step #5371.2: HAR_etch

etch_noop · HAR_etch

1.04	402.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

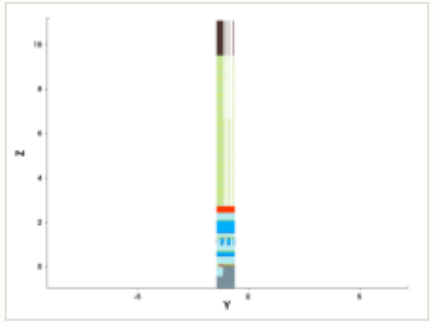

y cut at -1.035 µm

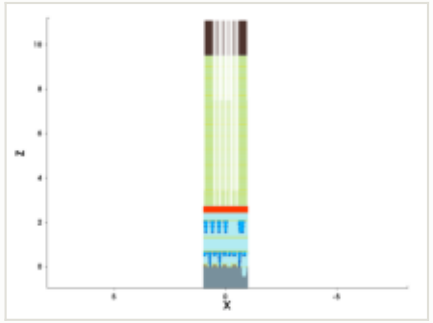

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

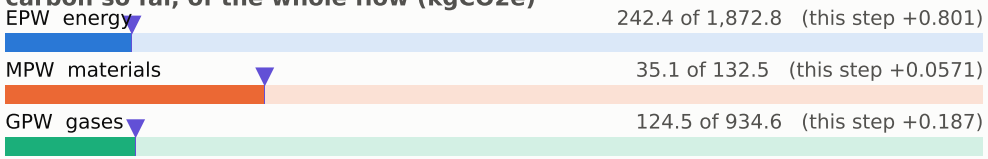

embodied carbon up to each step (kgCO2e per wafer)

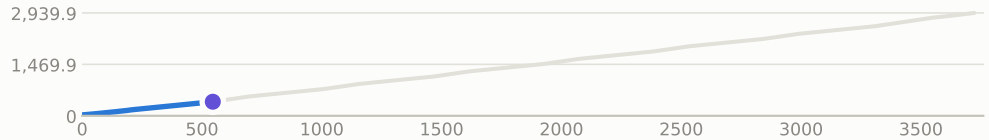

steps by process area

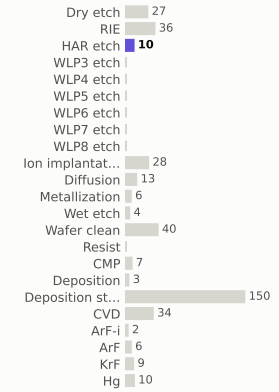

materials deposited (g)

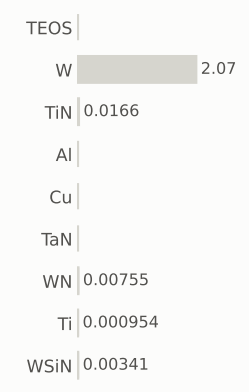

gases emitted (g)

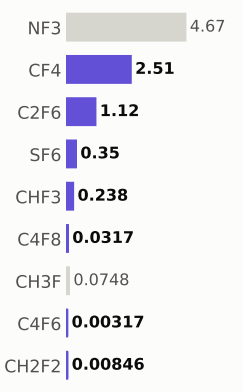

Step #5371.2667: HAR_etch

etch_noop · HAR_etch

1.04	403.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

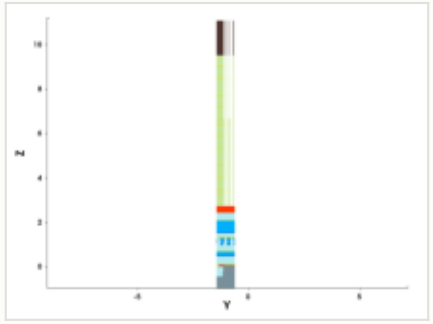

y cut at -1.035 µm

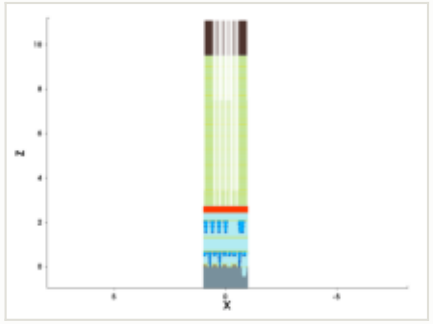

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

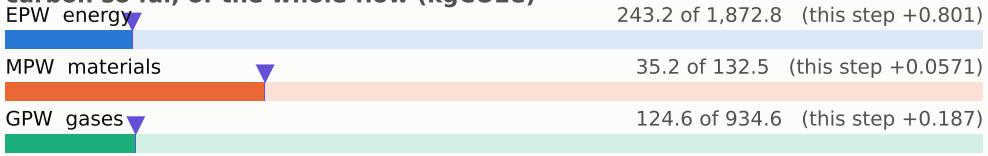

embodied carbon up to each step (kgCO2e per wafer)

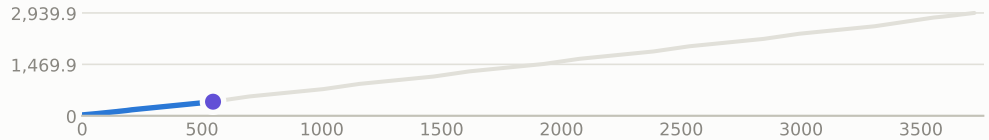

steps by process area

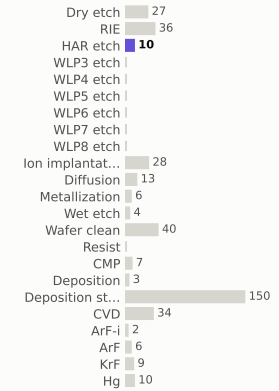

materials deposited (g)

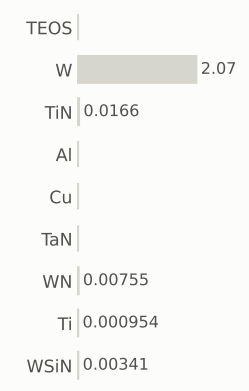

gases emitted (g)

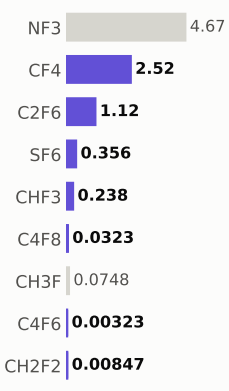

Step #5371.3333: HAR_etch

etch_noop · HAR_etch

1.04	404.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

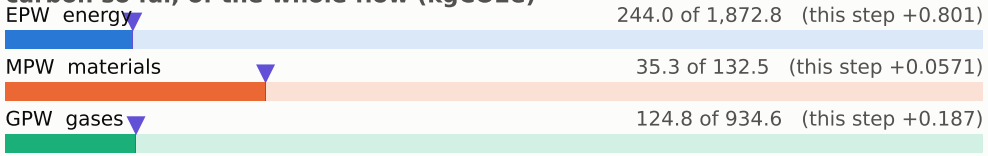

embodied carbon up to each step (kgCO2e per wafer)

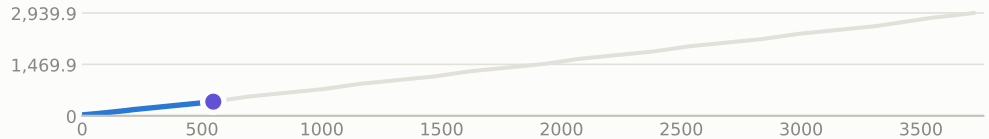

x cut at 0.000 µm

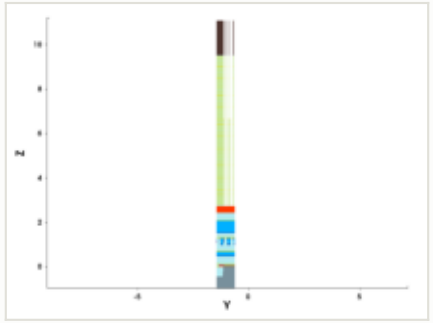

y cut at -1.035 µm

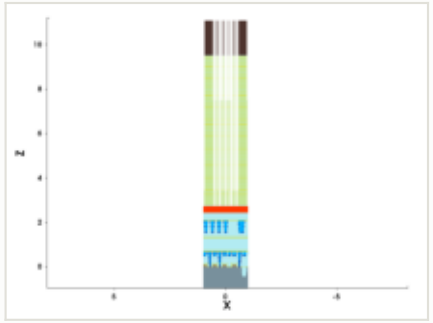

mask for this step

no mask for this step

steps by process area

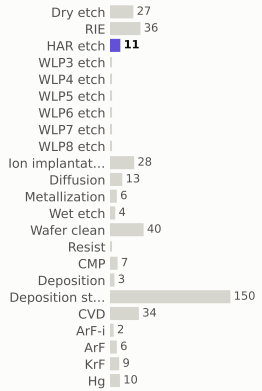

materials deposited (g)

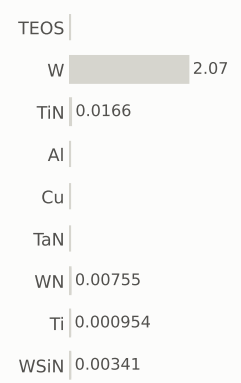

gases emitted (g)

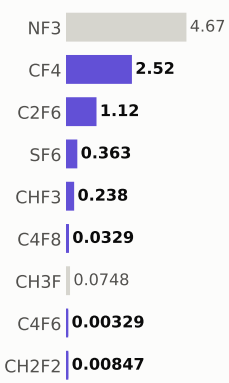

Step #5371.4: HAR_etch

etch_noop · HAR_etch

1.04	405.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

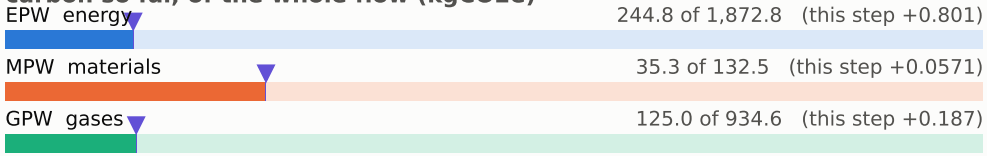

embodied carbon up to each step (kgCO2e per wafer)

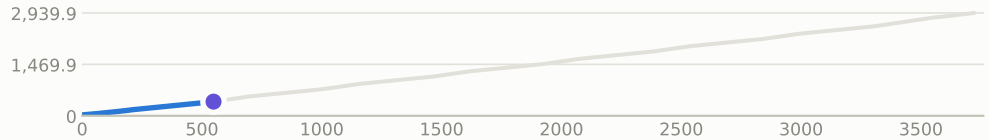

x cut at 0.000 µm

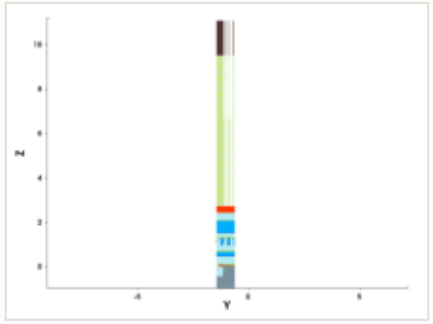

y cut at -1.035 µm

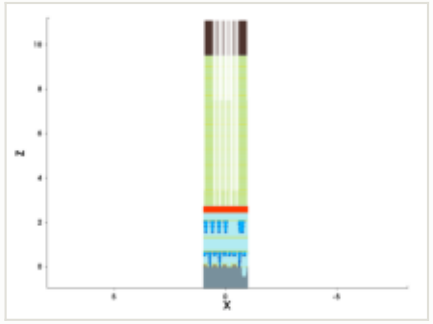

mask for this step

no mask for this step

steps by process area

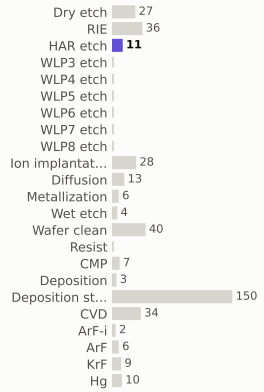

materials deposited (g)

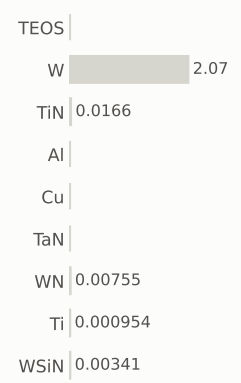

gases emitted (g)

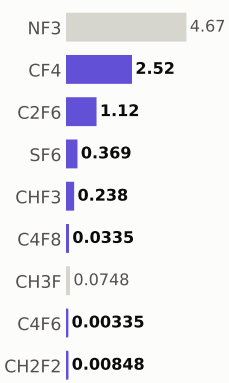

Step #5371.4667: HAR_etch

etch_noop · HAR_etch

1.04	406.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

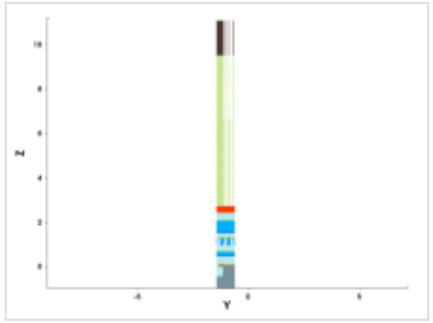

y cut at -1.035 µm

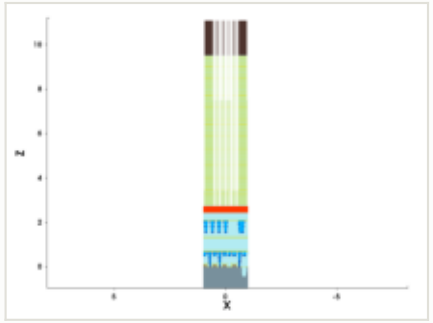

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

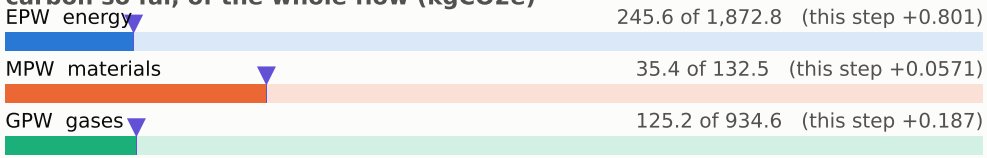

embodied carbon up to each step (kgCO2e per wafer)

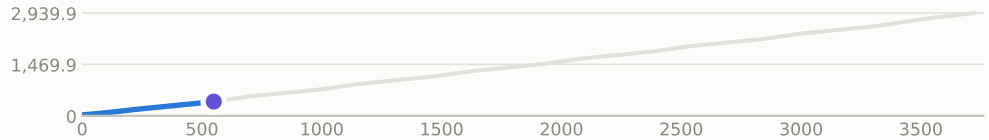

steps by process area

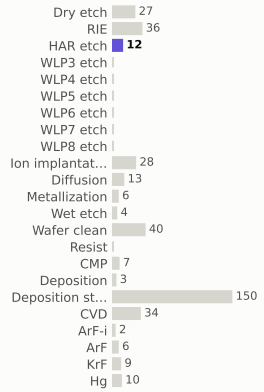

materials deposited (g)

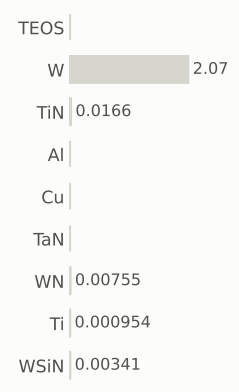

gases emitted (g)

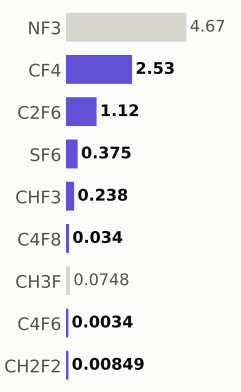

Step #5371.5333: HAR_etch

etch_noop · HAR_etch

1.04	407.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

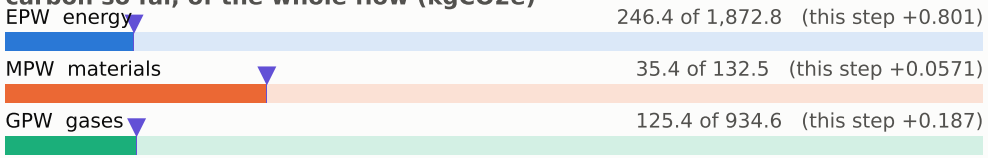

embodied carbon up to each step (kgCO2e per wafer)

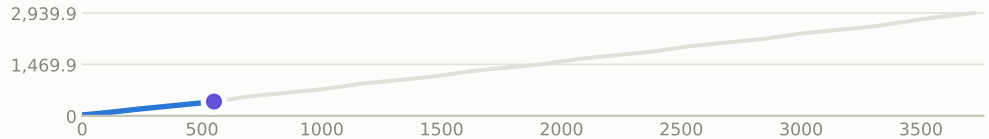

x cut at 0.000 µm

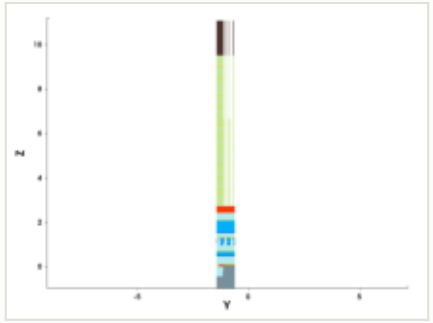

y cut at -1.035 µm

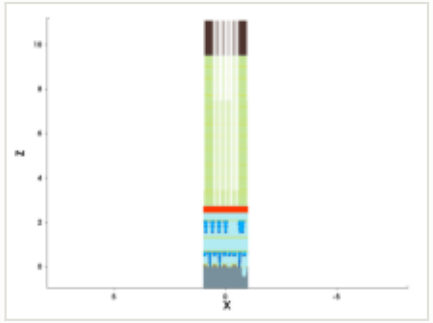

mask for this step

no mask for this step

steps by process area

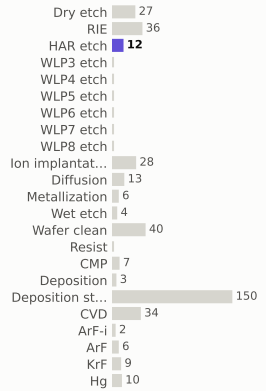

materials deposited (g)

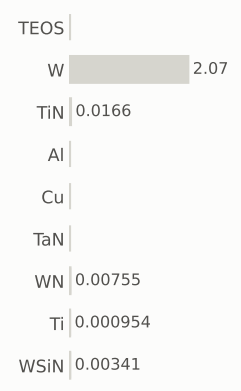

gases emitted (g)

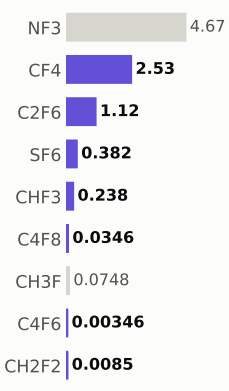

Step #5371.6: HAR_etch

etch_noop · HAR_etch

1.04	408.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

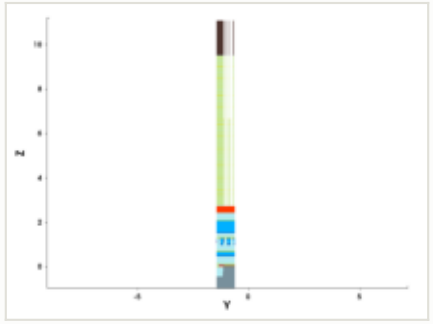

y cut at -1.035 µm

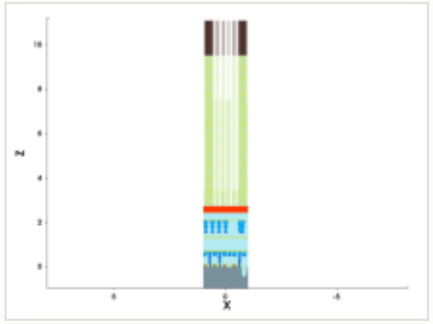

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

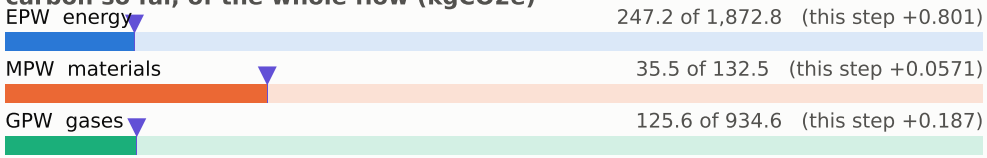

embodied carbon up to each step (kgCO2e per wafer)

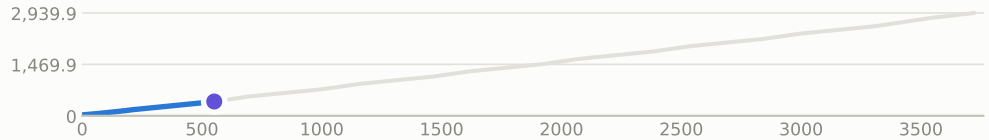

steps by process area

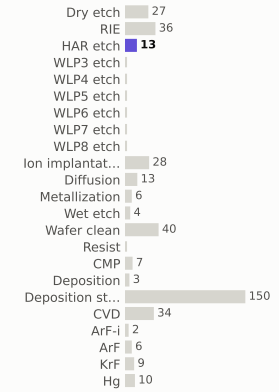

materials deposited (g)

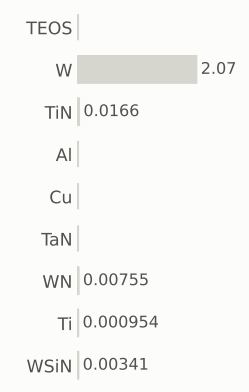

gases emitted (g)

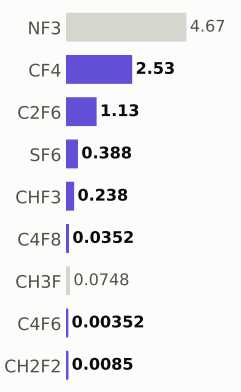

Step #5371.6667: HAR_etch

etch_noop · HAR_etch

1.04	409.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

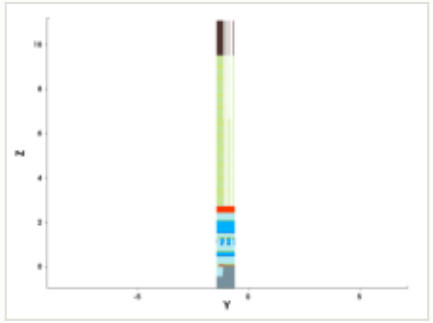

y cut at -1.035 µm

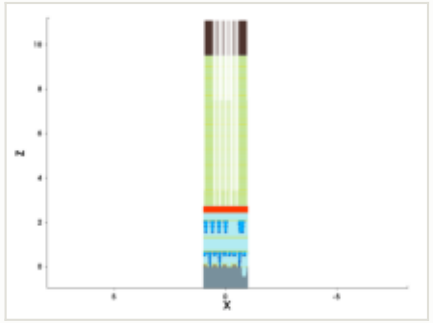

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

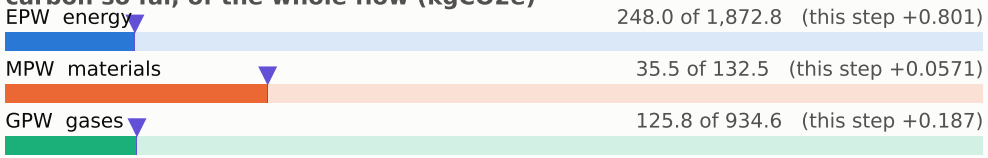

embodied carbon up to each step (kgCO2e per wafer)

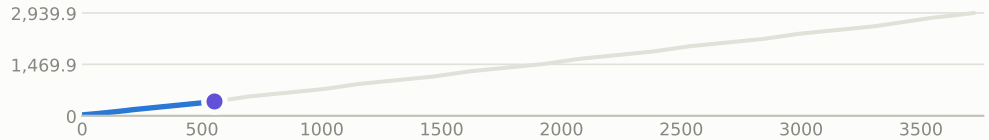

steps by process area

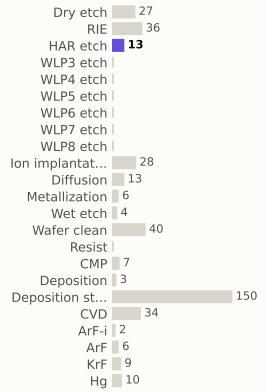

materials deposited (g)

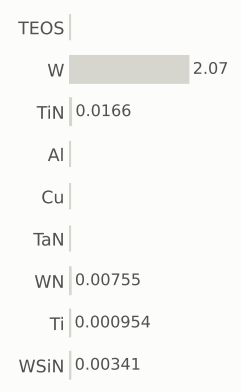

gases emitted (g)

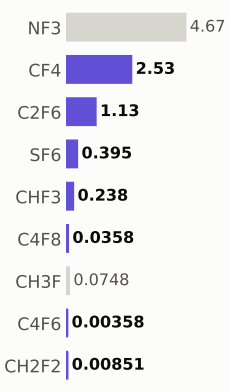

Step #5371.7333: HAR_etch

etch_noop · HAR_etch

1.04	410.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

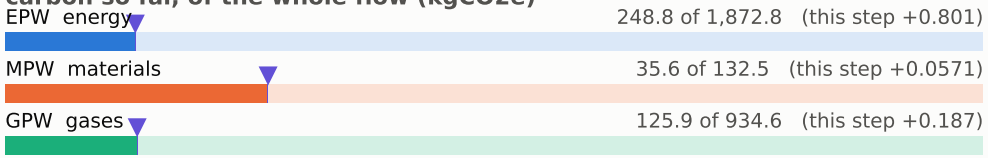

embodied carbon up to each step (kgCO2e per wafer)

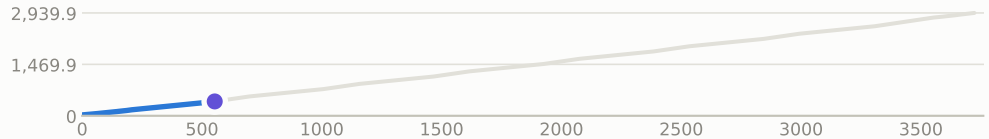

x cut at 0.000 µm

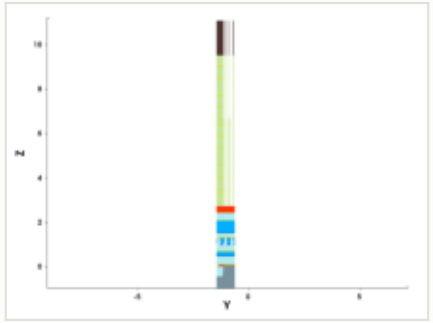

y cut at -1.035 µm

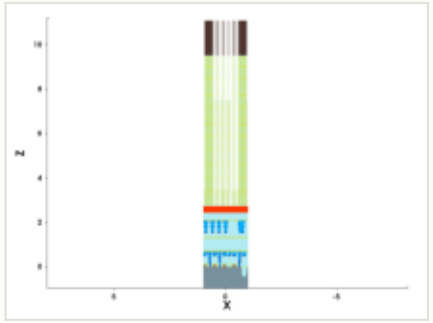

mask for this step

no mask for this step

steps by process area

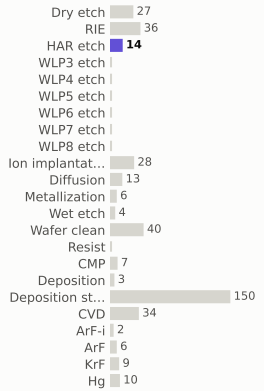

materials deposited (g)

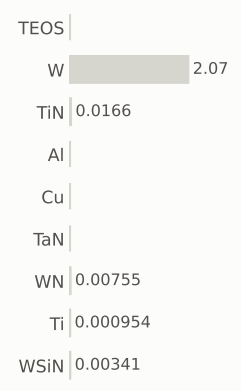

gases emitted (g)

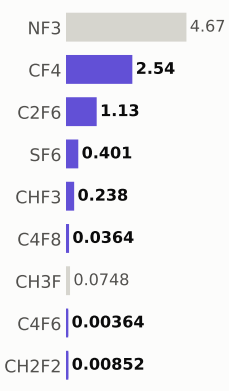

Step #5371.8: HAR_etch

etch_noop · HAR_etch

1.04	411.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

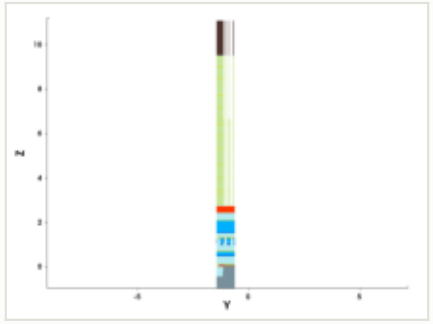

y cut at -1.035 µm

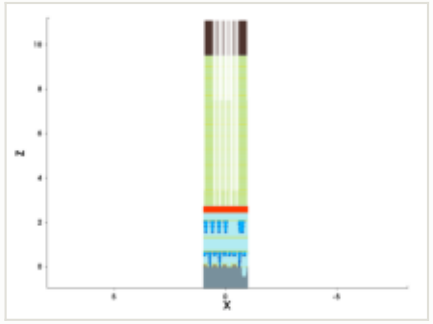

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

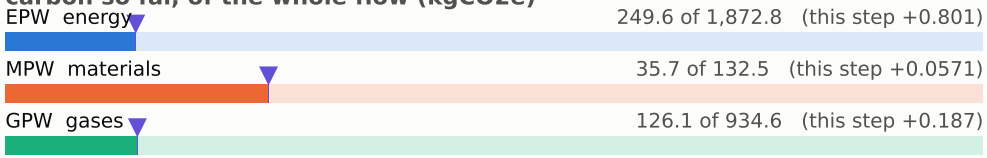

embodied carbon up to each step (kgCO2e per wafer)

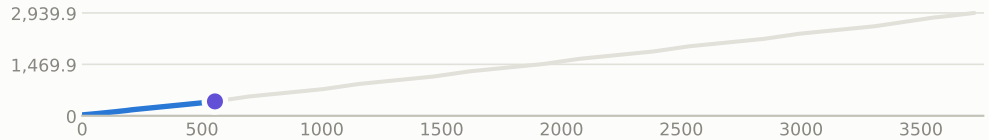

steps by process area

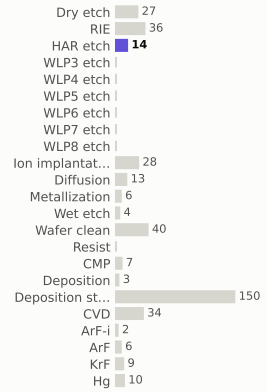

materials deposited (g)

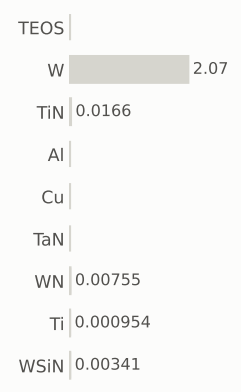

gases emitted (g)

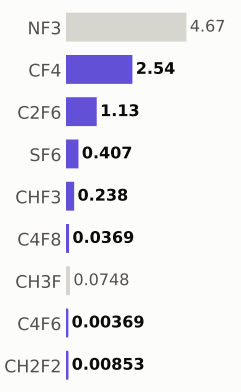

Step #5371.8667: HAR_etch

etch_noop · HAR_etch

1.04	412.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

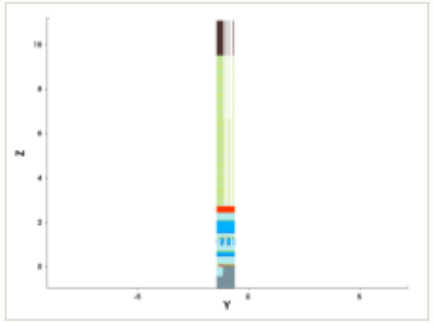

y cut at -1.035 µm

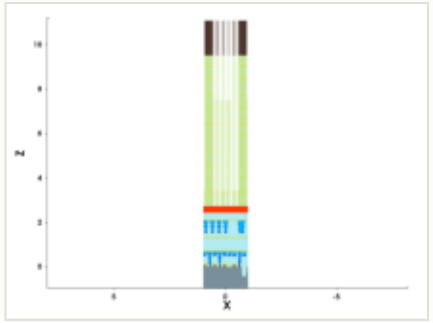

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

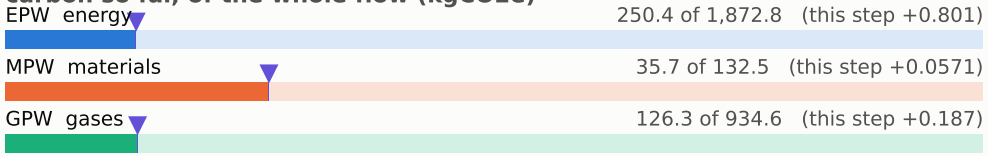

embodied carbon up to each step (kgCO2e per wafer)

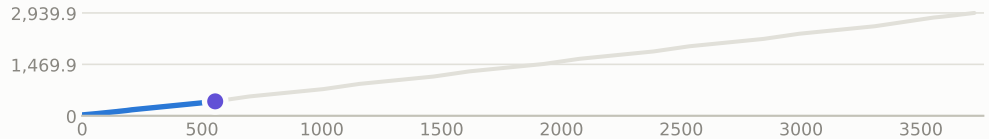

steps by process area

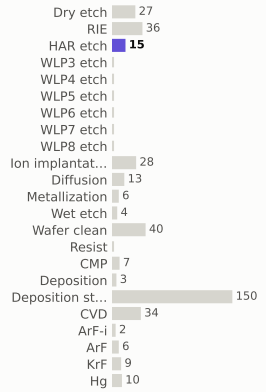

materials deposited (g)

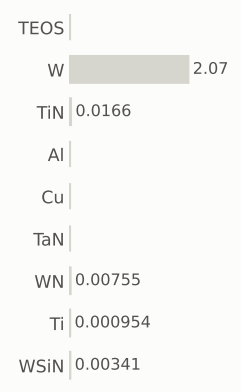

gases emitted (g)

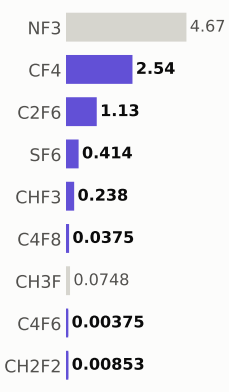

Step #5371.9333: HAR_etch

etch_noop · HAR_etch

1.04	413.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

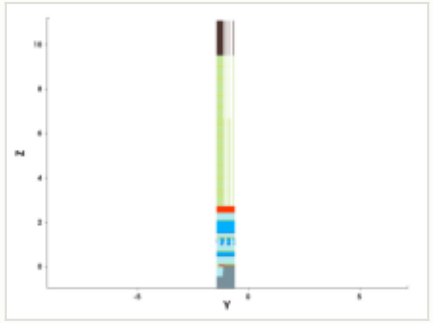

y cut at -1.035 µm

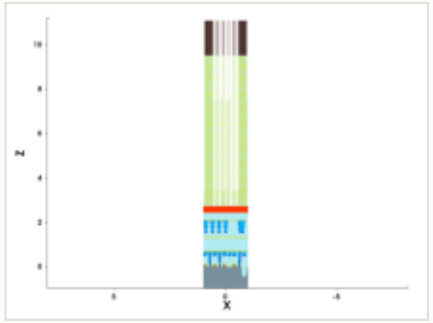

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

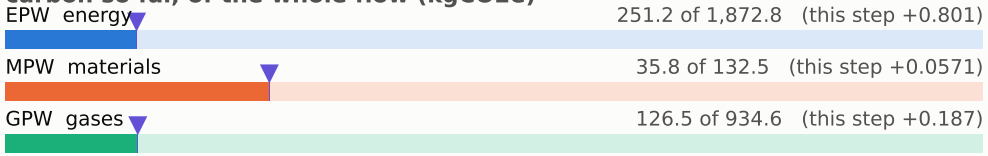

embodied carbon up to each step (kgCO2e per wafer)

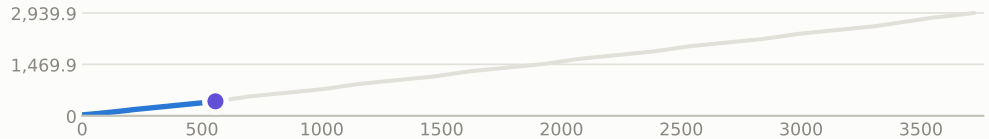

steps by process area

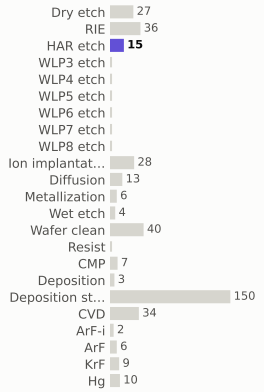

materials deposited (g)

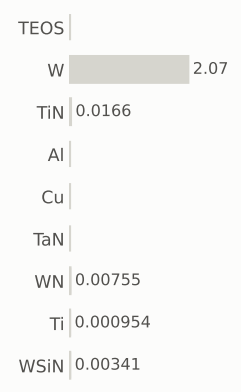

gases emitted (g)

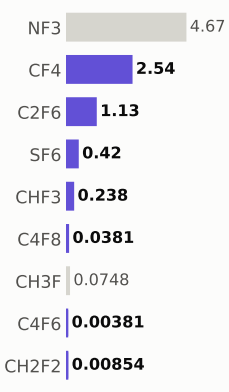

Step #5372: HAR_etch

etch_noop · HAR_etch

1.04	414.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 252.0 of 1,872.8 (this step +0.801)

MPW materials — 35.8 of 132.5 (this step +0.0571)

GPW gases — 126.7 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

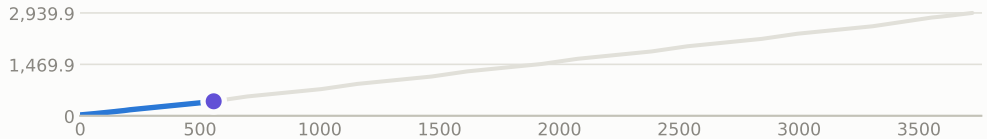

x cut at 0.000 µm

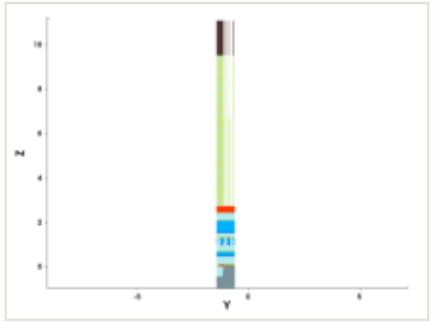

y cut at -1.035 µm

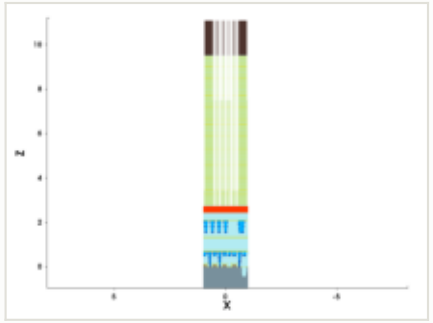

mask for this step

no mask for this step

steps by process area

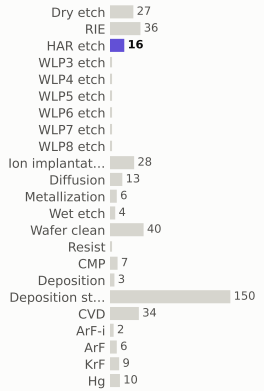

materials deposited (g)

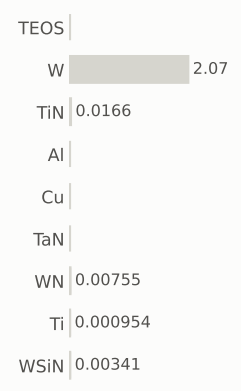

gases emitted (g)

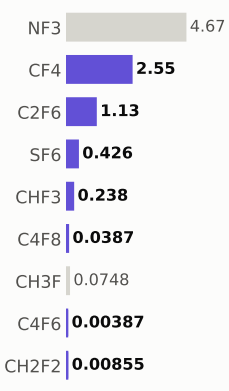

Step #5372.0667: HAR_etch

etch_noop · HAR_etch

1.04	415.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

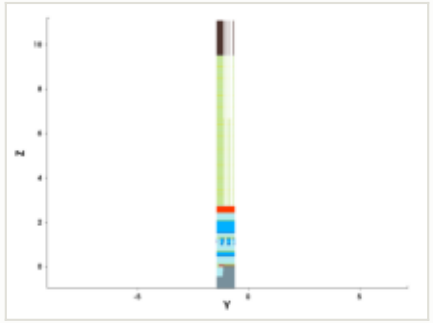

y cut at -1.035 µm

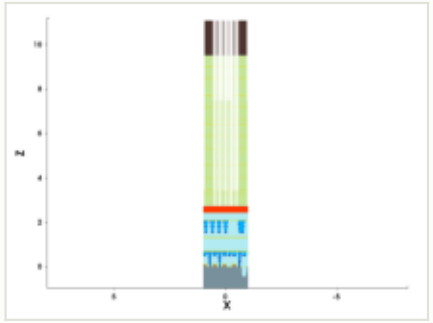

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

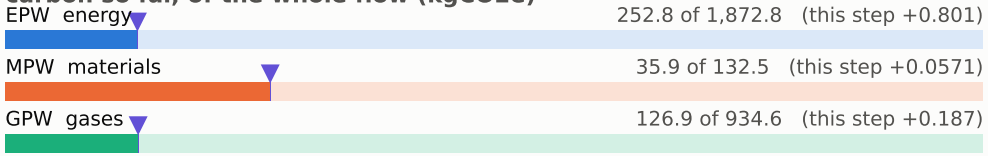

embodied carbon up to each step (kgCO2e per wafer)

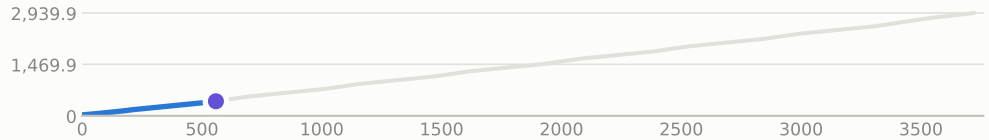

steps by process area

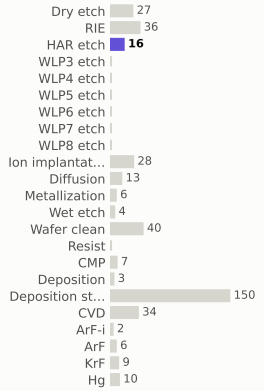

materials deposited (g)

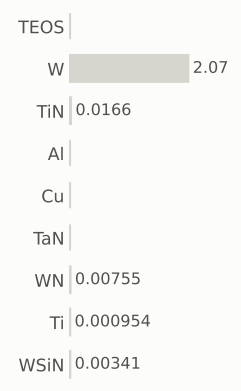

gases emitted (g)

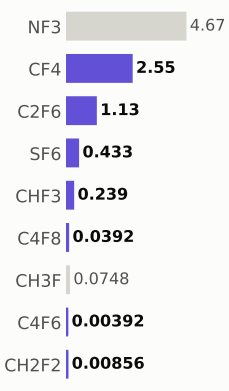

Step #5372.1333: HAR_etch

etch_noop · HAR_etch

1.04	416.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

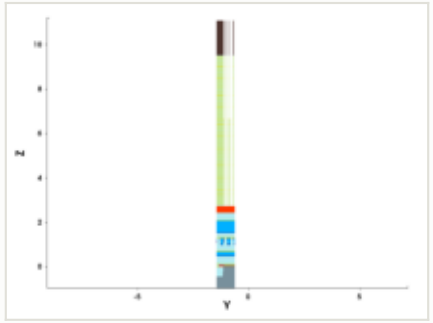

y cut at -1.035 µm

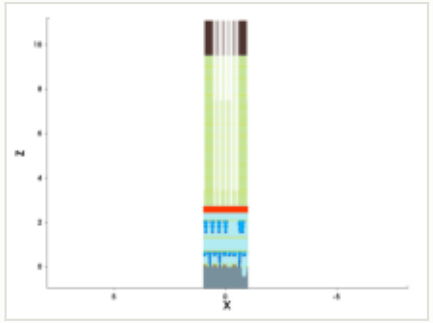

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

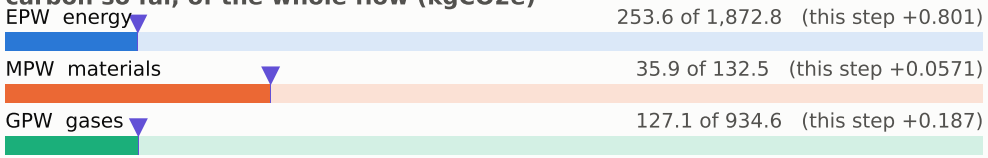

embodied carbon up to each step (kgCO2e per wafer)

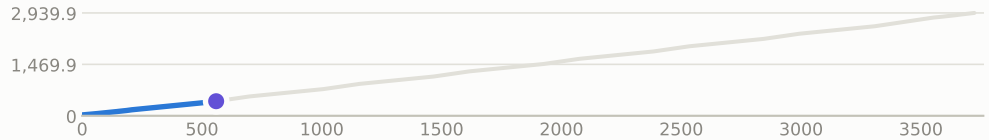

steps by process area

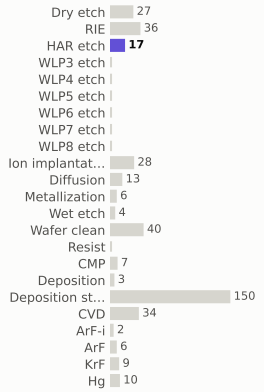

materials deposited (g)

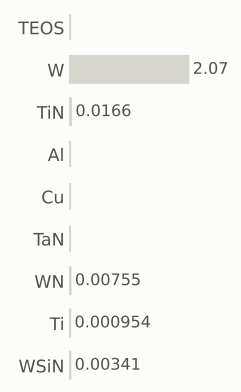

gases emitted (g)

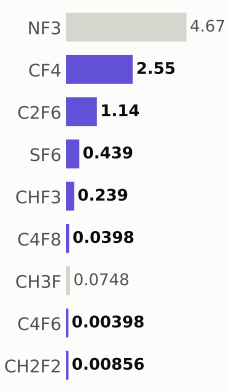

Step #5372.2: HAR_etch

etch_noop · HAR_etch

1.04	417.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

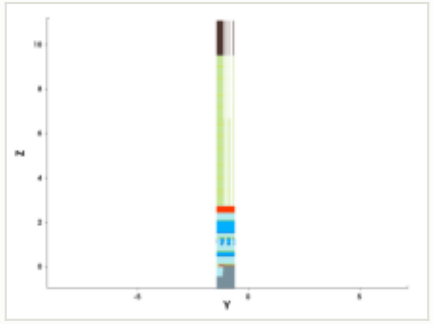

y cut at -1.035 µm

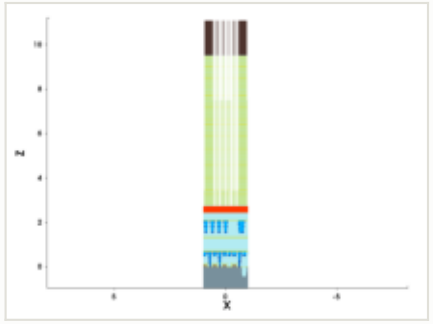

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

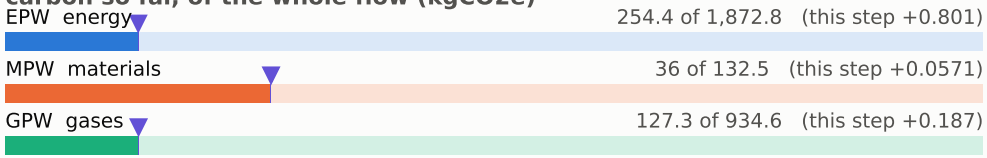

embodied carbon up to each step (kgCO2e per wafer)

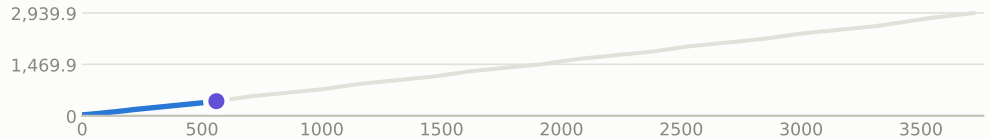

steps by process area

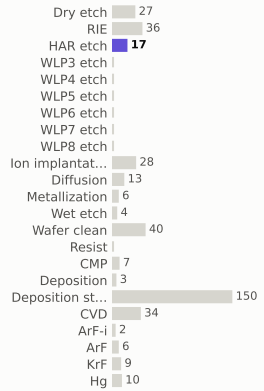

materials deposited (g)

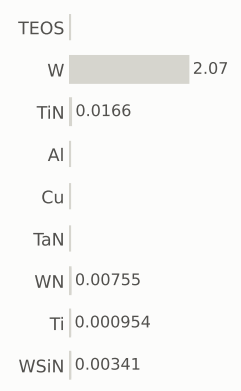

gases emitted (g)

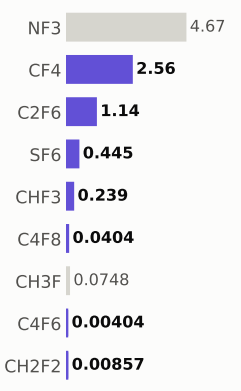

Step #5372.2667: HAR_etch

etch_noop · HAR_etch

1.04	418.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

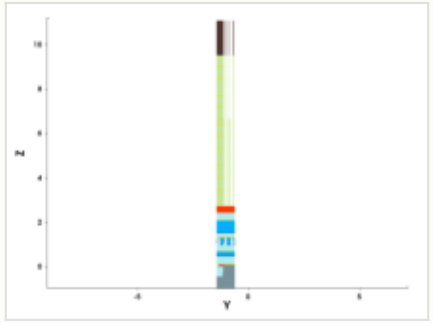

y cut at -1.035 µm

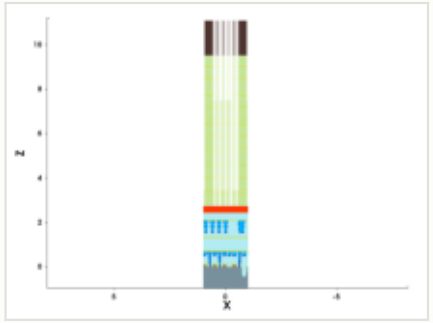

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

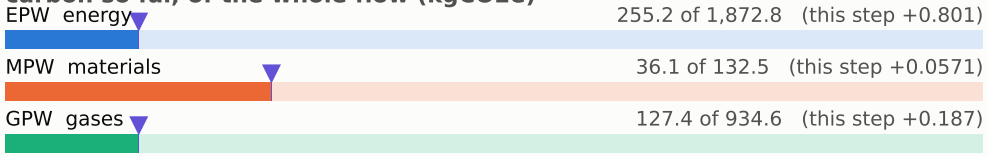

embodied carbon up to each step (kgCO2e per wafer)

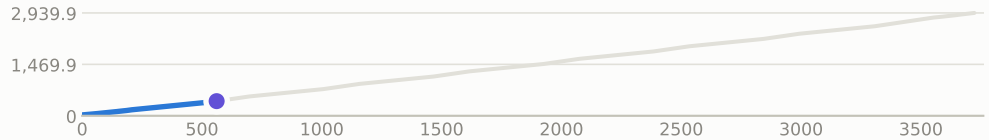

steps by process area

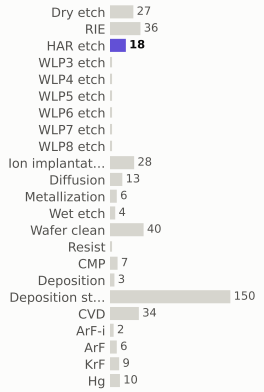

materials deposited (g)

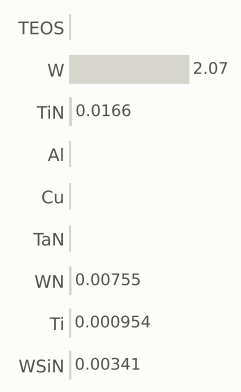

gases emitted (g)

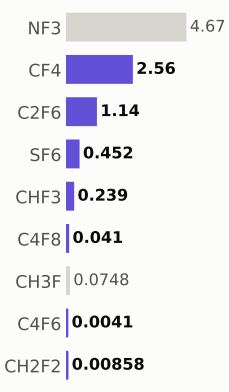

Step #5372.3333: HAR_etch

etch_noop · HAR_etch

1.04	419.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

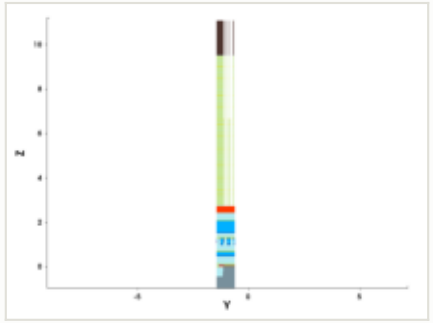

y cut at -1.035 µm

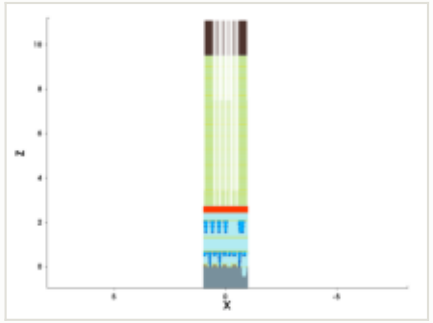

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

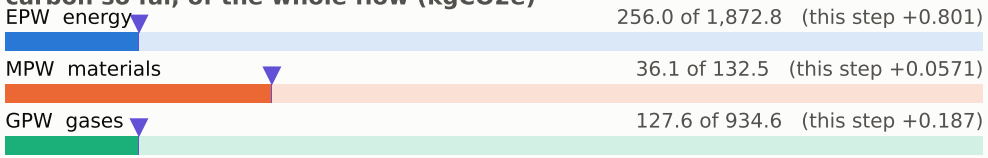

embodied carbon up to each step (kgCO2e per wafer)

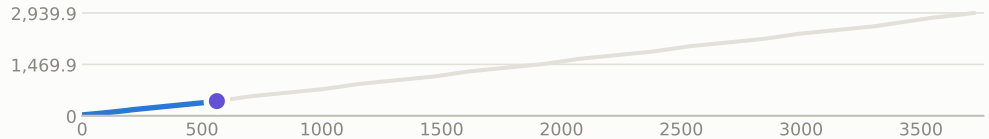

steps by process area

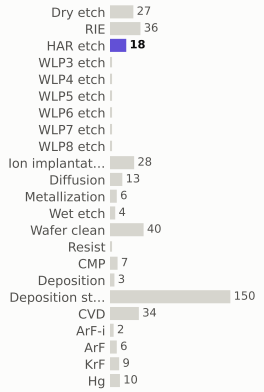

materials deposited (g)

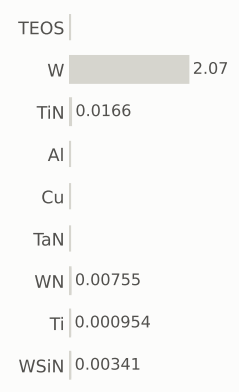

gases emitted (g)

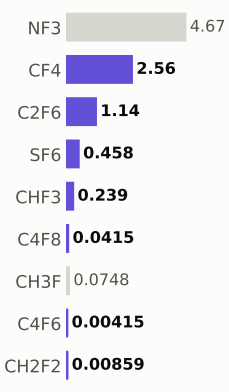

Step #5372.4: HAR_etch

etch_noop · HAR_etch

1.04	420.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

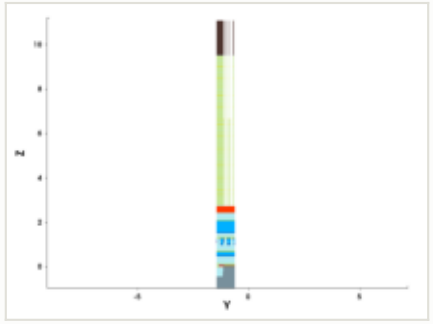

y cut at -1.035 µm

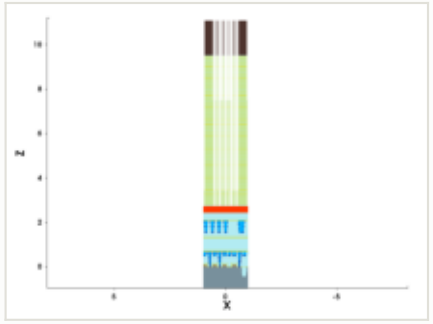

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

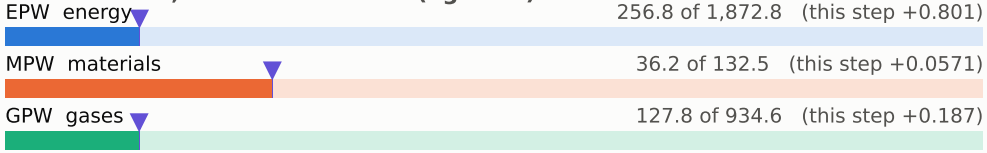

embodied carbon up to each step (kgCO2e per wafer)

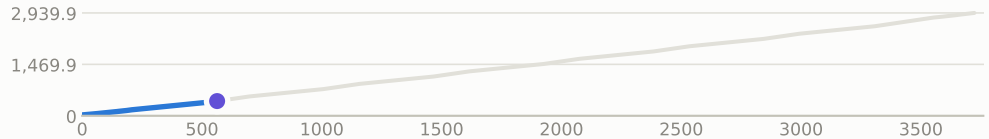

steps by process area

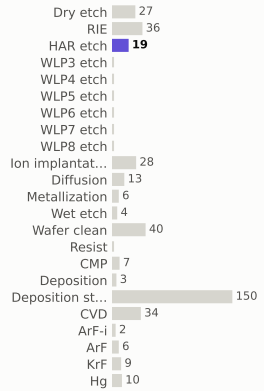

materials deposited (g)

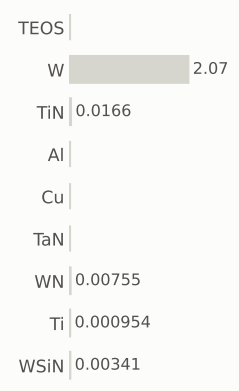

gases emitted (g)

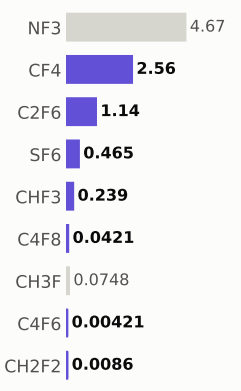

Step #5372.4667: HAR_etch

etch_noop · HAR_etch

1.04	421.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

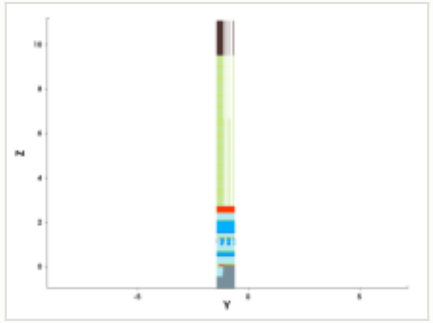

y cut at -1.035 µm

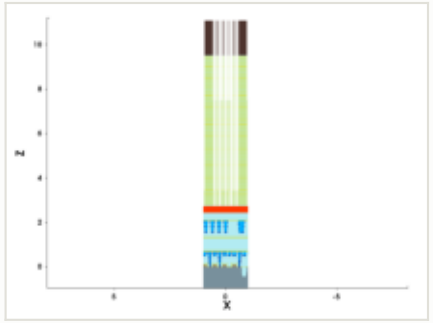

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

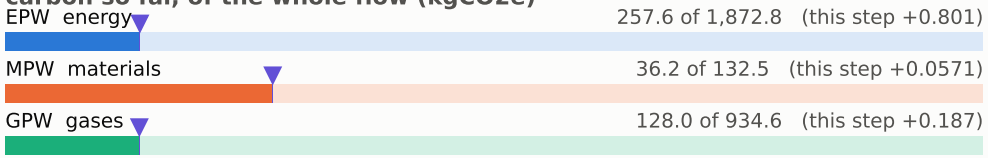

embodied carbon up to each step (kgCO2e per wafer)

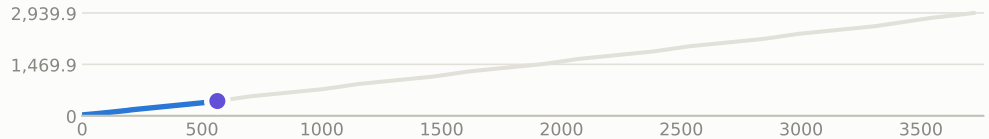

steps by process area

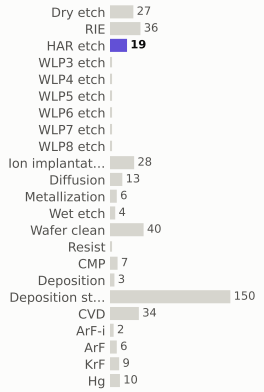

materials deposited (g)

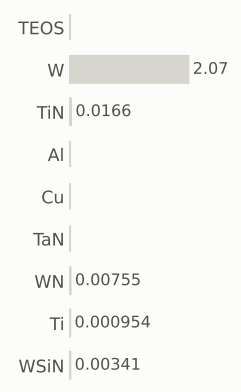

gases emitted (g)

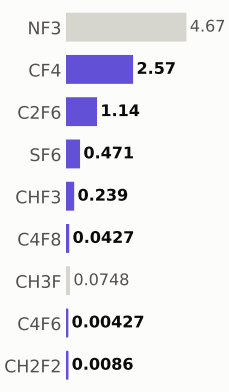

Step #5372.5333: HAR_etch

etch_noop · HAR_etch

1.04	422.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

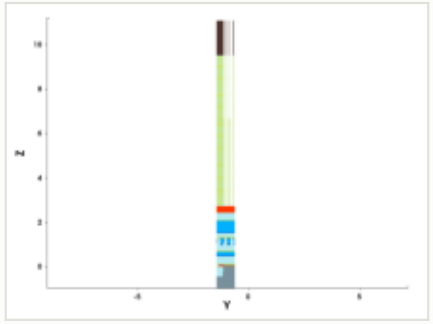

y cut at -1.035 µm

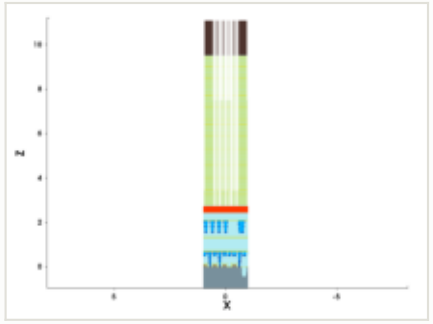

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

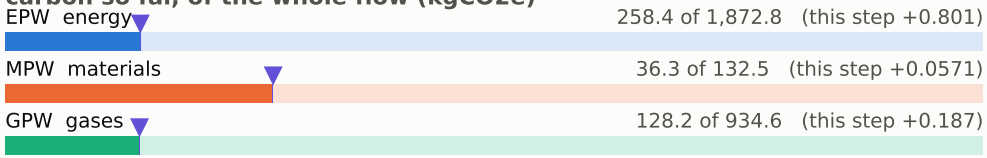

embodied carbon up to each step (kgCO2e per wafer)

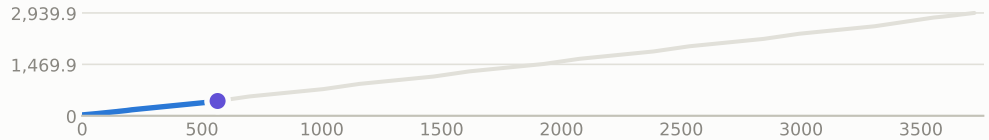

steps by process area

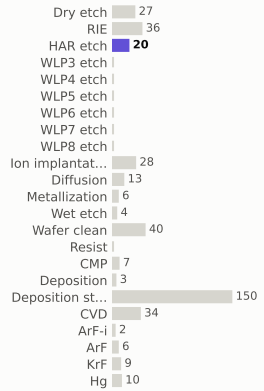

materials deposited (g)

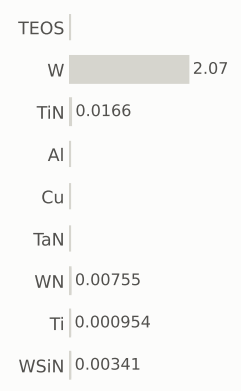

gases emitted (g)

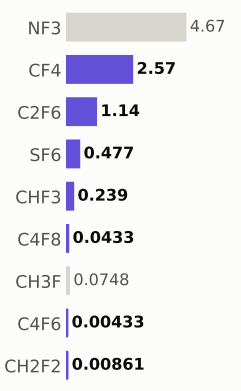

Step #5372.6: HAR_etch

etch_noop · HAR_etch

1.04	423.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

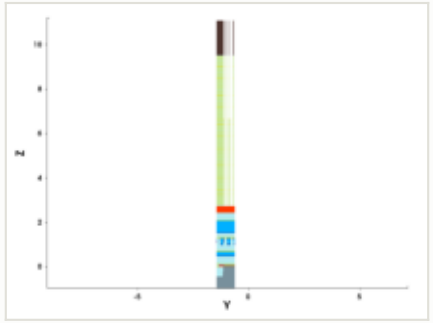

y cut at -1.035 µm

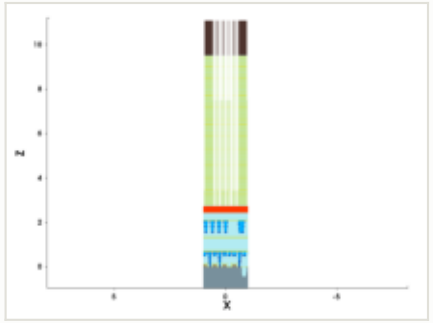

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

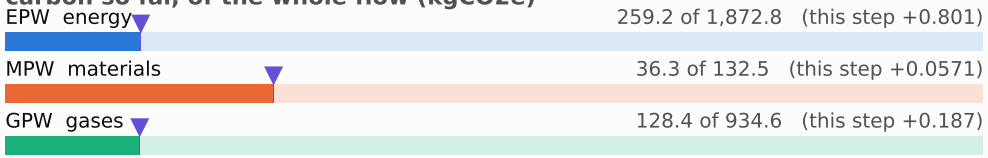

embodied carbon up to each step (kgCO2e per wafer)

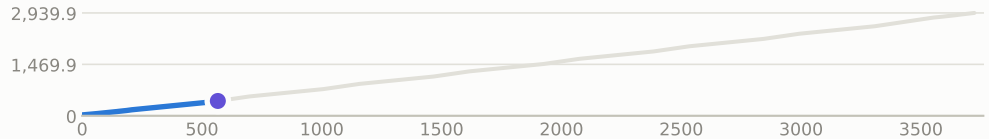

steps by process area

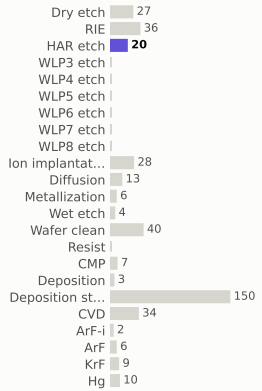

materials deposited (g)

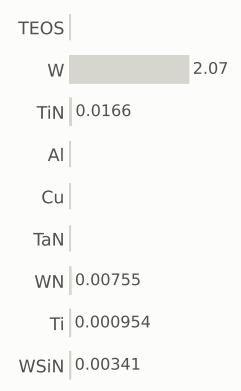

gases emitted (g)

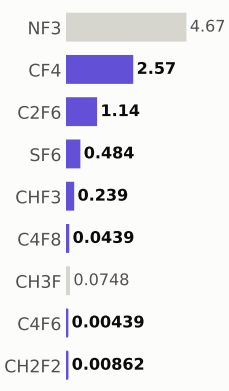

Step #5372.6667: HAR_etch

etch_noop · HAR_etch

1.04	425.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

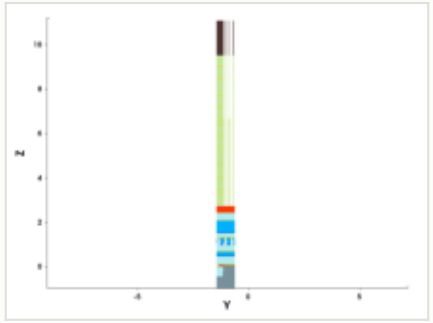

y cut at -1.035 µm

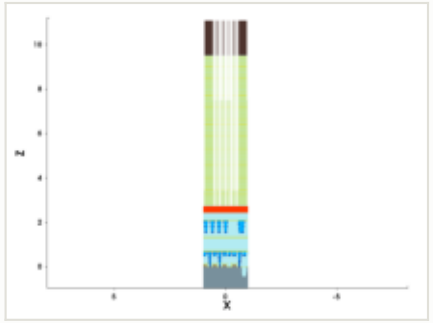

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

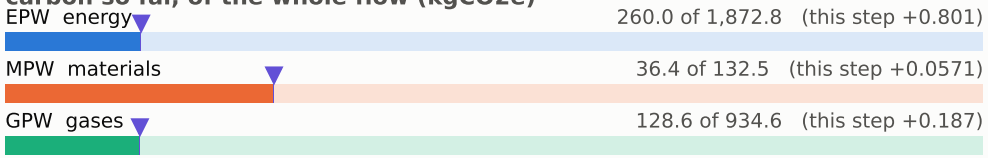

embodied carbon up to each step (kgCO2e per wafer)

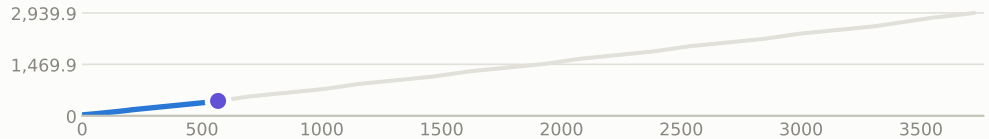

steps by process area

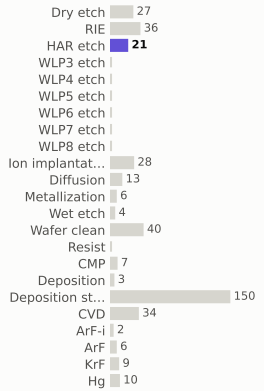

materials deposited (g)

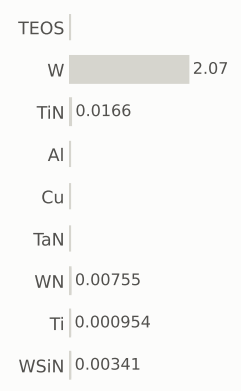

gases emitted (g)

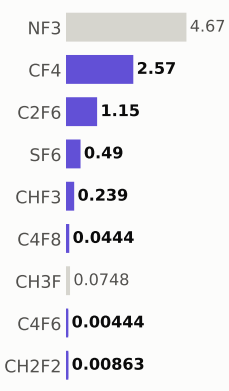

Step #5372.7333: HAR_etch

etch_noop · HAR_etch

1.04	426.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

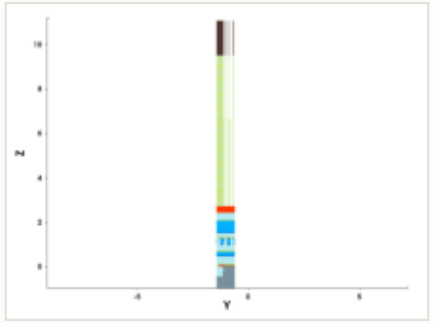

y cut at -1.035 µm

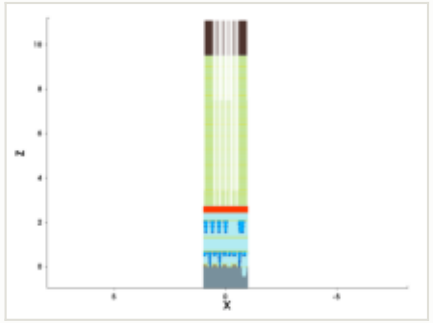

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

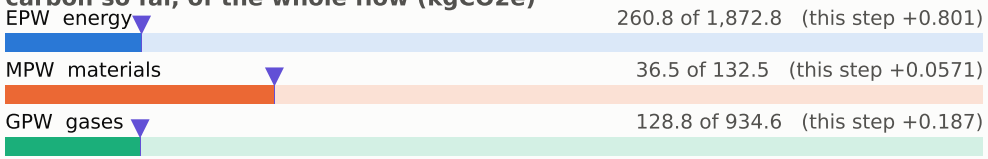

embodied carbon up to each step (kgCO2e per wafer)

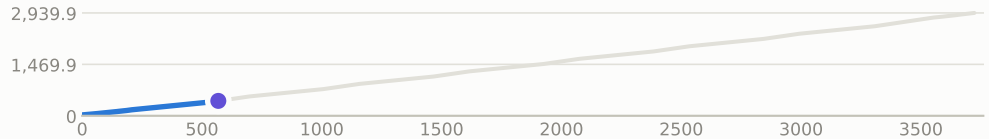

steps by process area

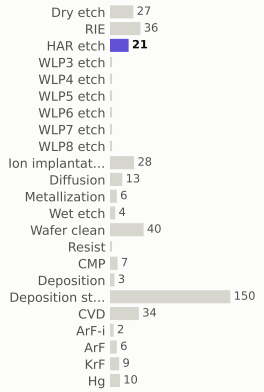

materials deposited (g)

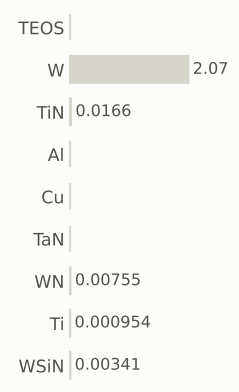

gases emitted (g)

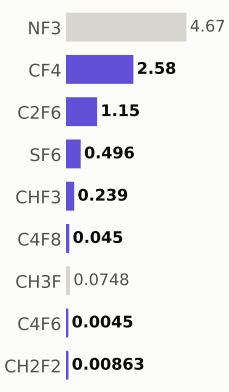

Step #5372.8: HAR_etch

etch_noop · HAR_etch

1.04	427.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

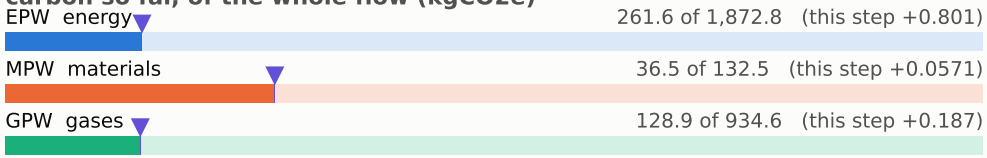

embodied carbon up to each step (kgCO2e per wafer)

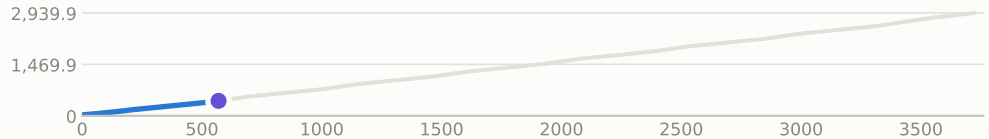

x cut at 0.000 µm

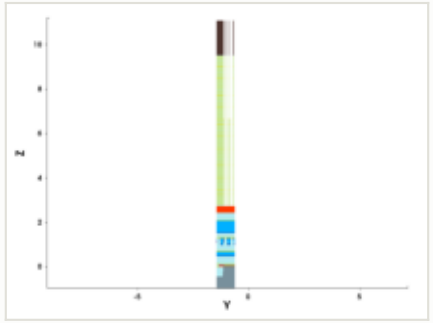

y cut at -1.035 µm

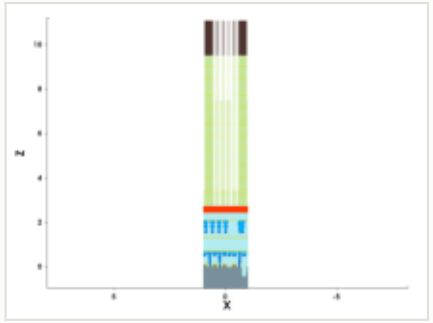

mask for this step

no mask for this step

steps by process area

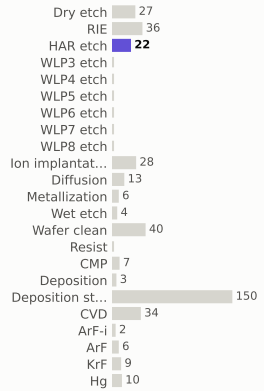

materials deposited (g)

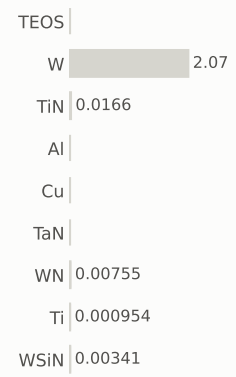

gases emitted (g)

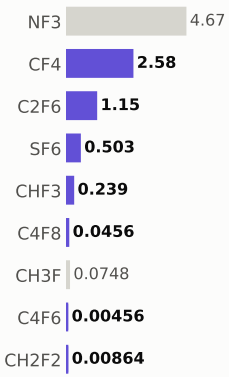

Step #5372.8667: HAR_etch

etch_noop · HAR_etch

1.04	428.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

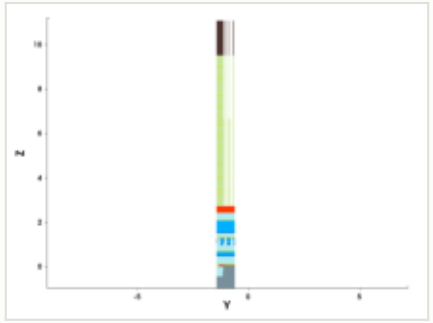

y cut at -1.035 µm

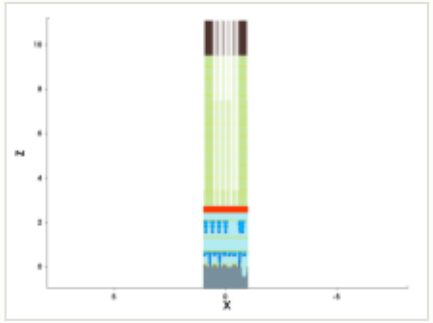

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

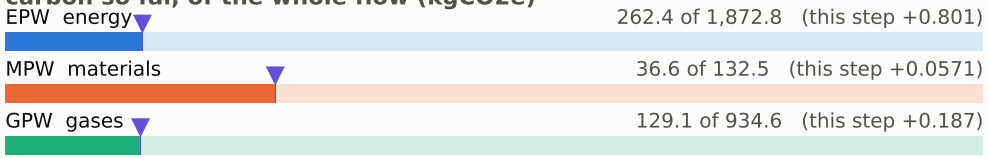

embodied carbon up to each step (kgCO2e per wafer)

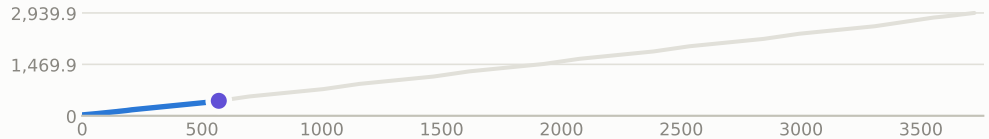

steps by process area

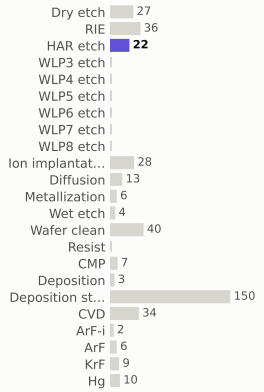

materials deposited (g)

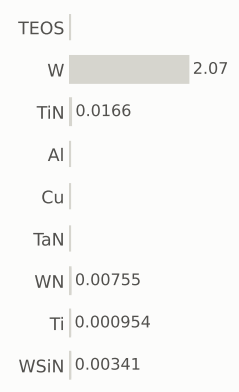

gases emitted (g)

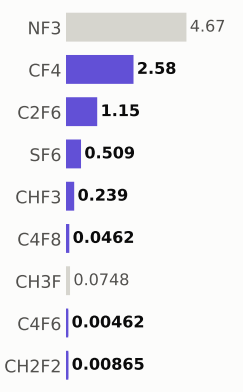

Step #5372.9333: HAR_etch

etch_noop · HAR_etch

1.04	429.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

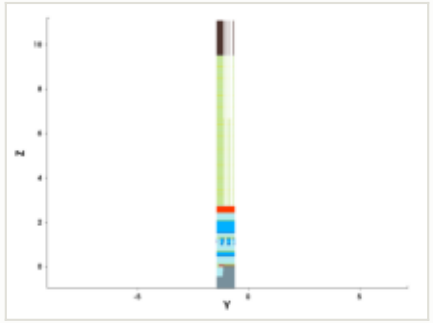

y cut at -1.035 µm

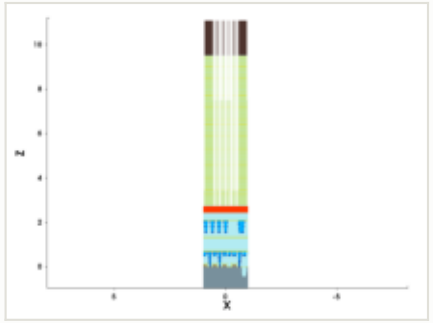

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

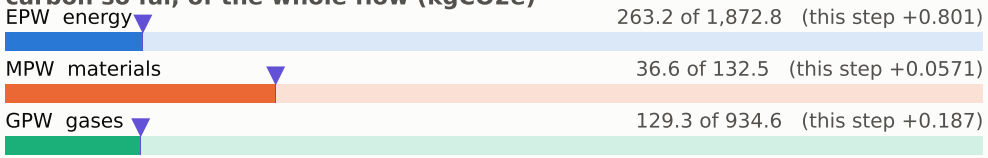

embodied carbon up to each step (kgCO2e per wafer)

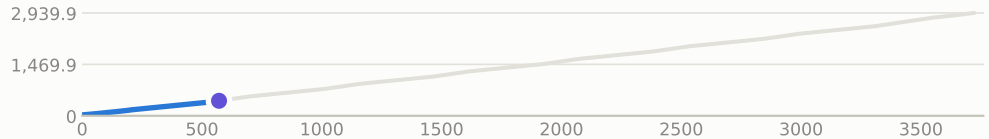

steps by process area

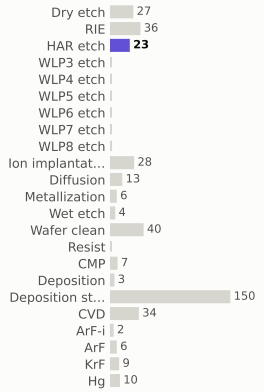

materials deposited (g)

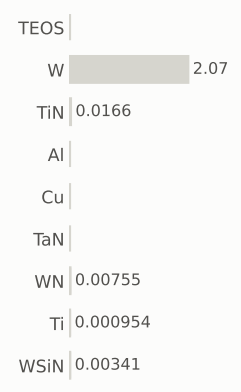

gases emitted (g)

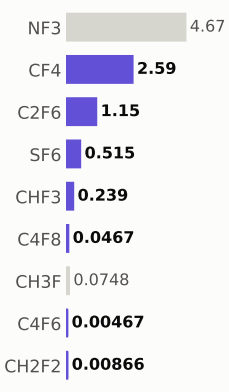

Step #5373: HAR_etch

etch_noop · HAR_etch

1.04	430.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

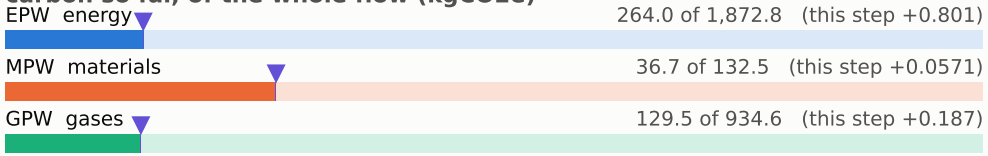

embodied carbon up to each step (kgCO2e per wafer)

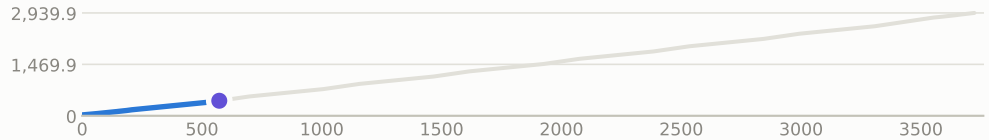

x cut at 0.000 µm

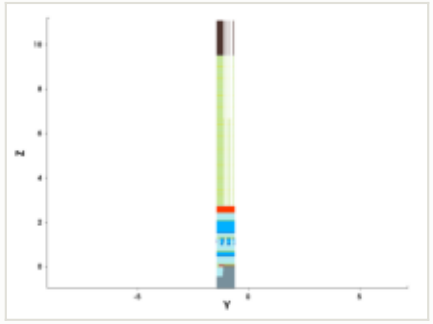

y cut at -1.035 µm

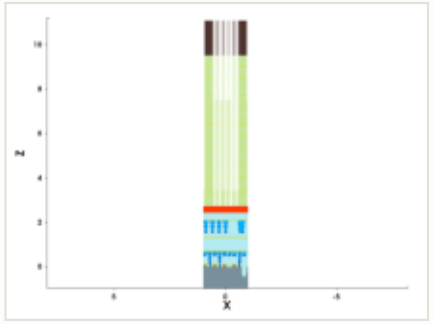

mask for this step

no mask for this step

steps by process area

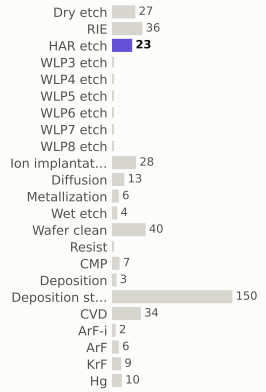

materials deposited (g)

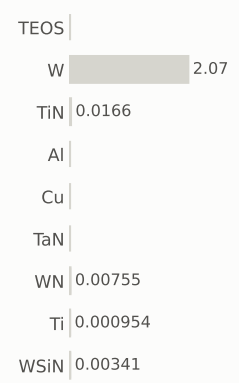

gases emitted (g)

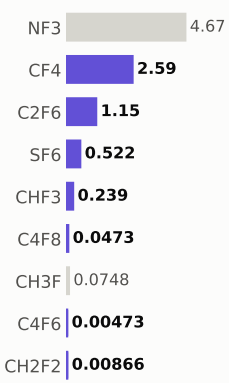

Step #5373.0667: HAR_etch

etch_noop · HAR_etch

1.04	431.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

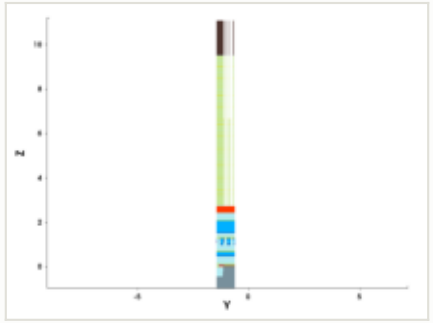

y cut at -1.035 µm

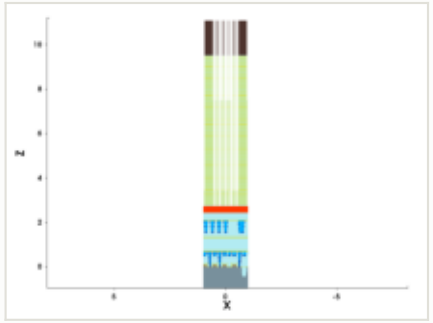

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

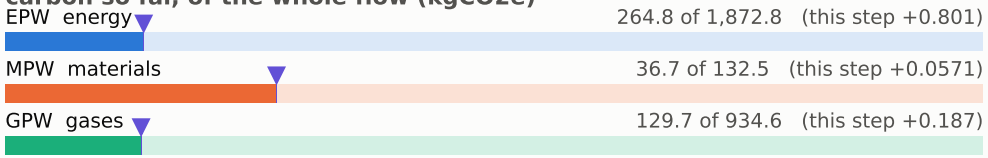

embodied carbon up to each step (kgCO2e per wafer)

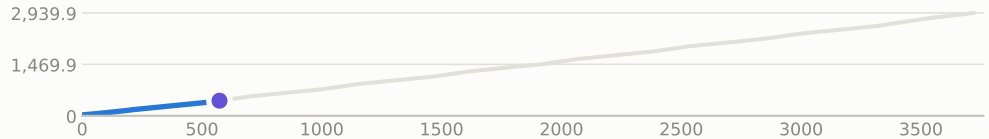

steps by process area

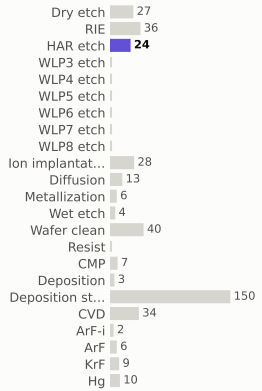

materials deposited (g)

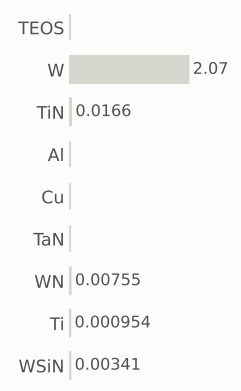

gases emitted (g)

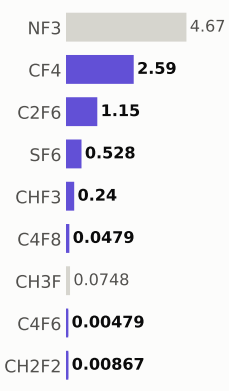

Step #5373.1333: HAR_etch

etch_noop · HAR_etch

1.04	432.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

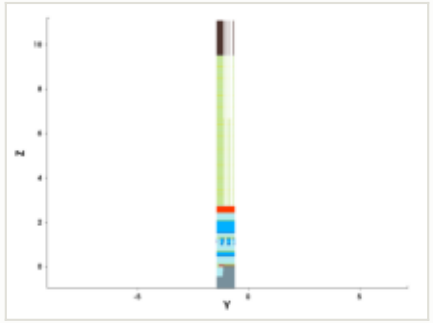

y cut at -1.035 µm

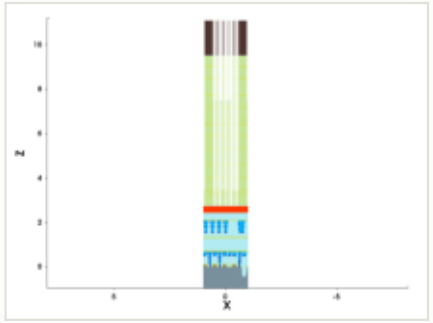

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

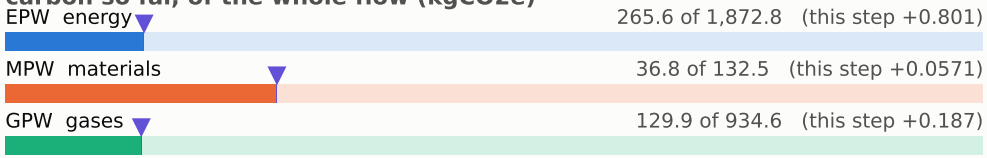

embodied carbon up to each step (kgCO2e per wafer)

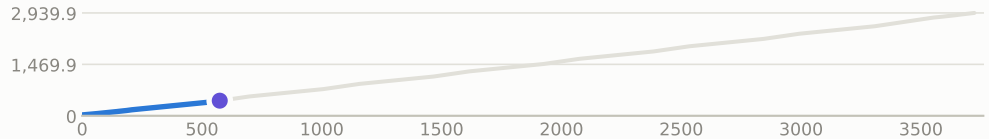

steps by process area

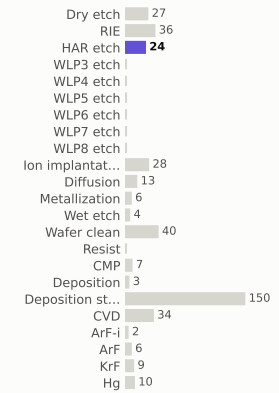

materials deposited (g)

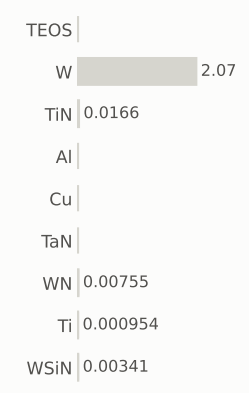

gases emitted (g)

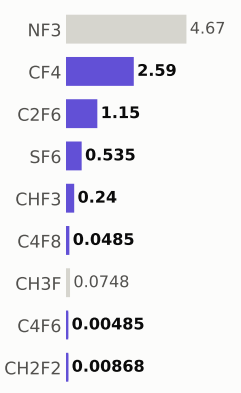

Step #5373.2: HAR_etch

etch_noop · HAR_etch

1.04	433.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

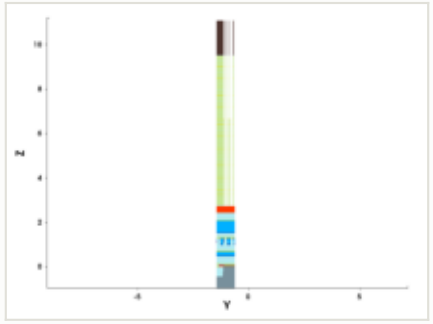

y cut at -1.035 µm

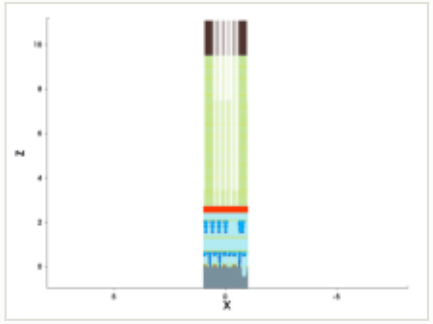

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

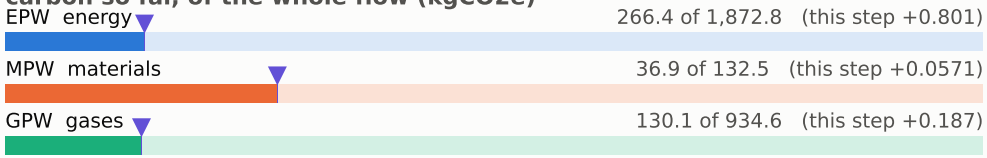

embodied carbon up to each step (kgCO2e per wafer)

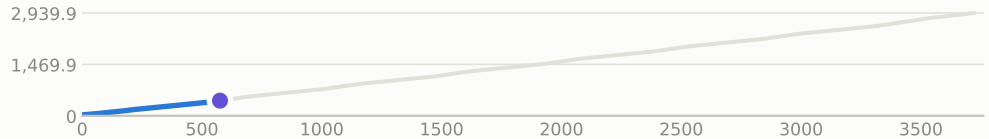

steps by process area

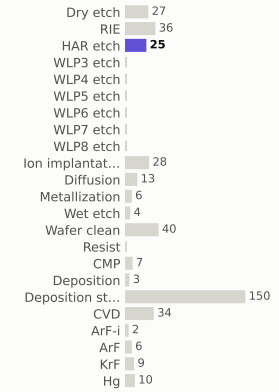

materials deposited (g)

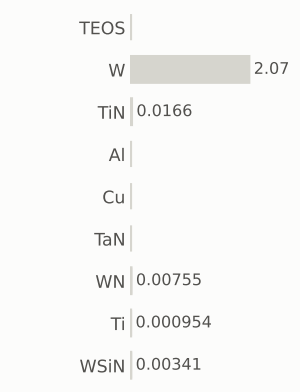

gases emitted (g)

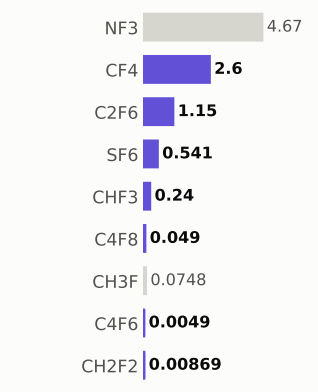

Step #5373.2667: HAR_etch

etch_noop · HAR_etch

1.04	434.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

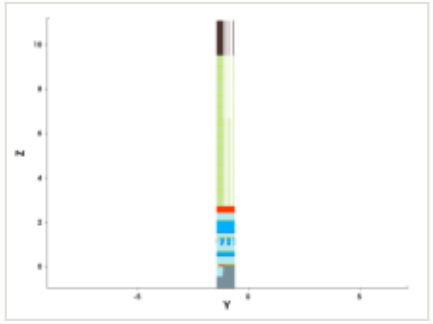

y cut at -1.035 µm

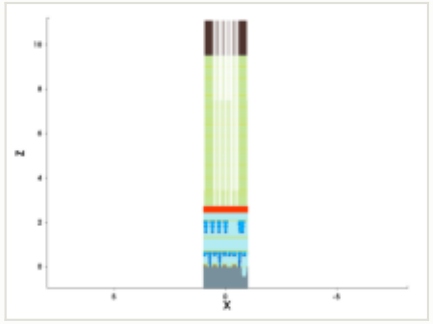

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

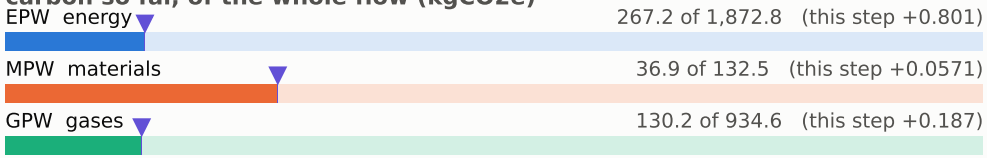

embodied carbon up to each step (kgCO2e per wafer)

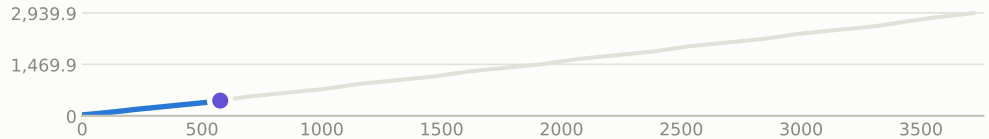

steps by process area

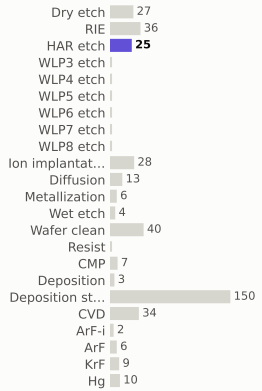

materials deposited (g)

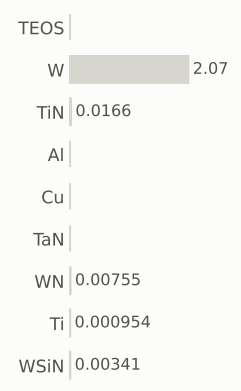

gases emitted (g)

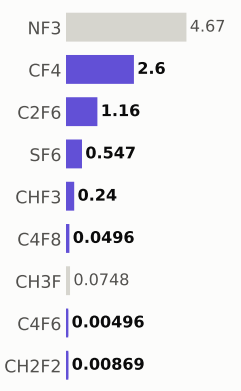

Step #5373.3333: HAR_etch

etch_noop · HAR_etch

1.04	435.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 268.0 of 1,872.8 (this step +0.801)

MPW materials — 37 of 132.5 (this step +0.0571)

GPW gases — 130.4 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

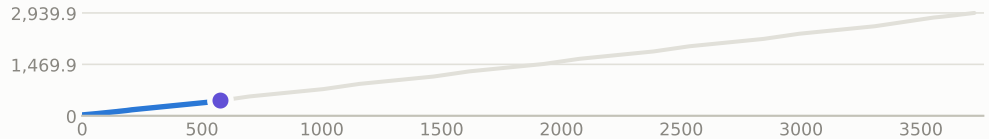

x cut at 0.000 µm

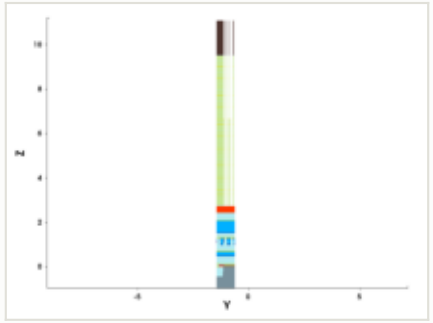

y cut at -1.035 µm

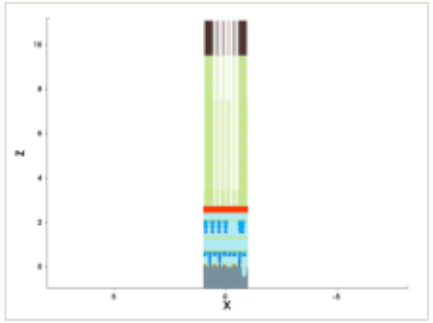

mask for this step

no mask for this step

steps by process area

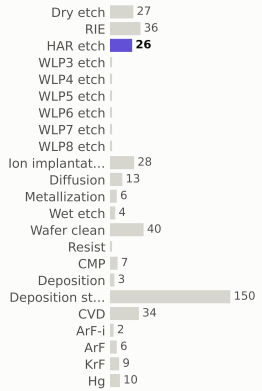

materials deposited (g)

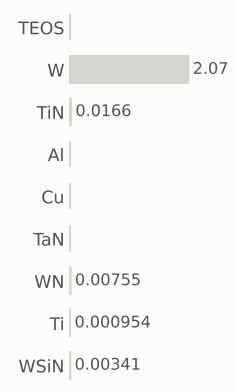

gases emitted (g)

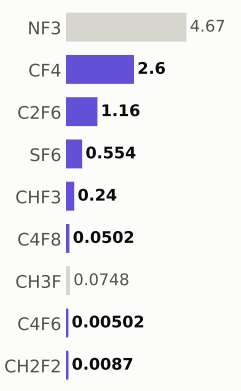

Step #5373.4: HAR_etch

etch_noop · HAR_etch

1.04	436.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

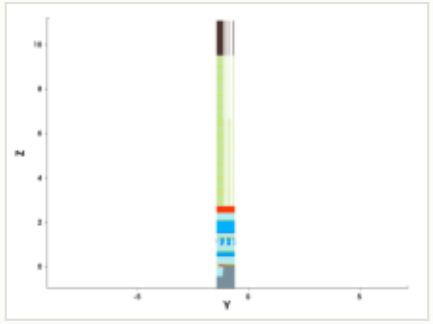

y cut at -1.035 µm

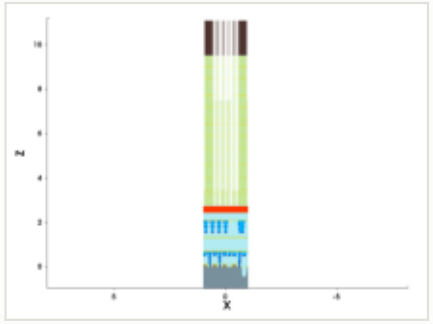

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

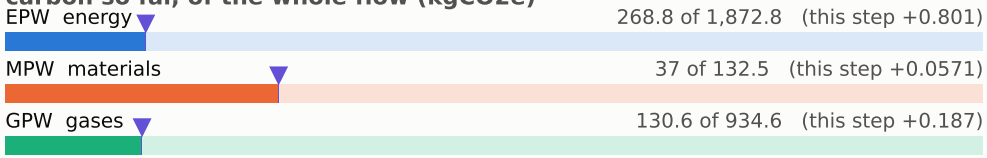

embodied carbon up to each step (kgCO2e per wafer)

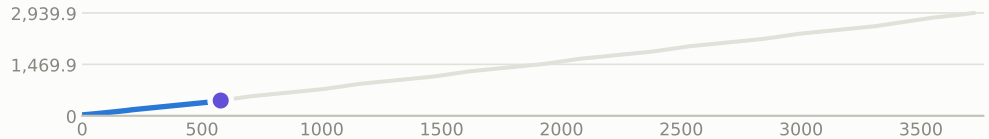

steps by process area

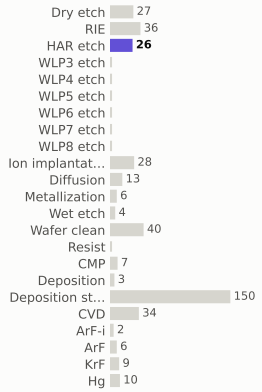

materials deposited (g)

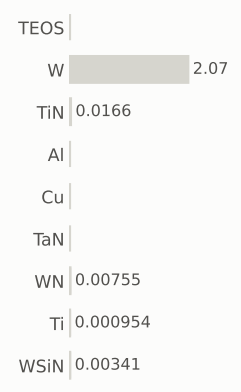

gases emitted (g)

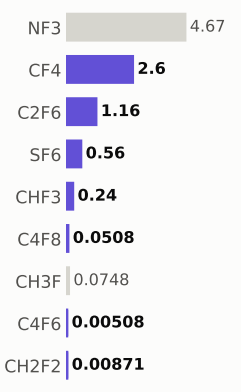

Step #5373.4667: HAR_etch

etch_noop · HAR_etch

1.04	437.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

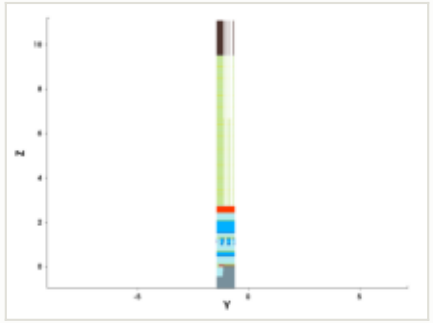

y cut at -1.035 µm

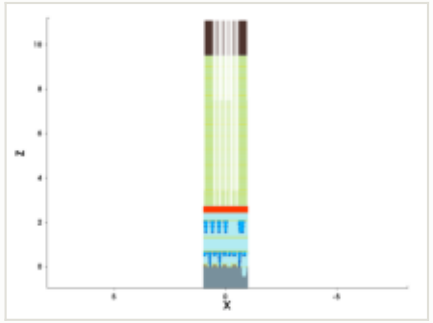

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

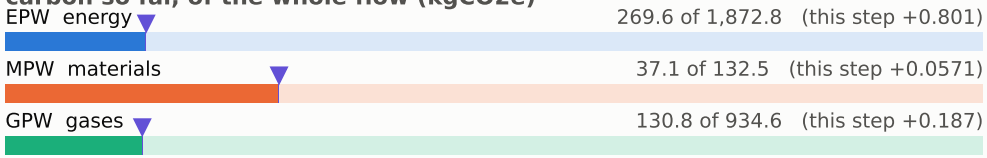

embodied carbon up to each step (kgCO2e per wafer)

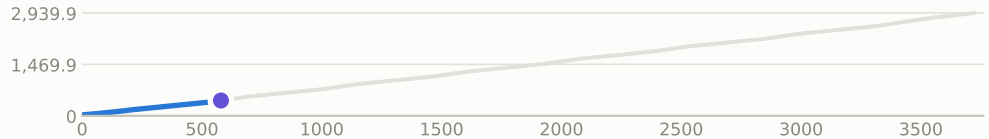

steps by process area

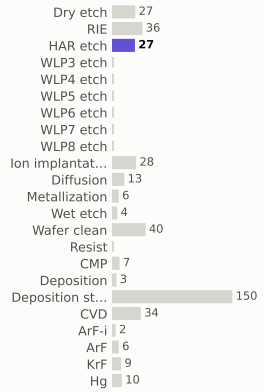

materials deposited (g)

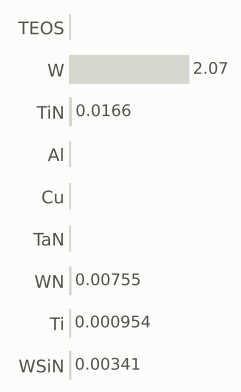

gases emitted (g)

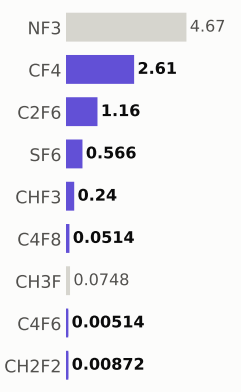

Step #5373.5333: HAR_etch

etch_noop · HAR_etch

1.04	438.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

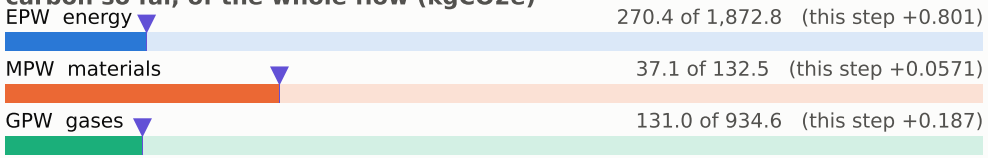

embodied carbon up to each step (kgCO2e per wafer)

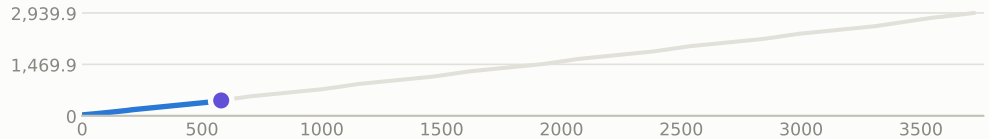

x cut at 0.000 µm

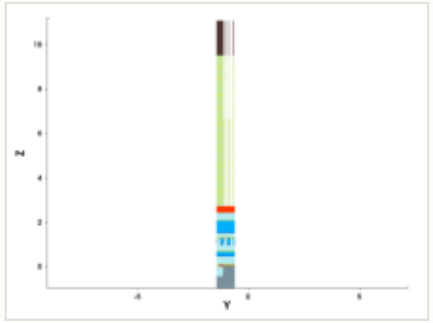

y cut at -1.035 µm

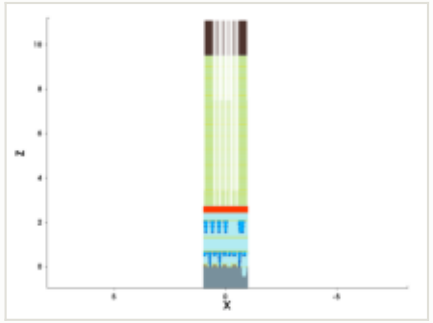

mask for this step

no mask for this step

steps by process area

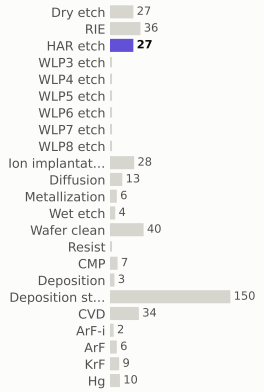

materials deposited (g)

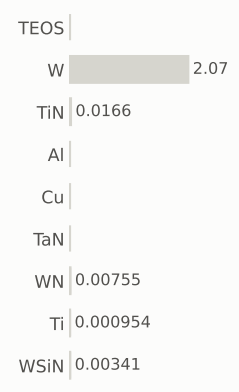

gases emitted (g)

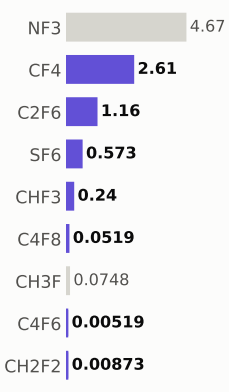

Step #5373.6: HAR_etch

etch_noop · HAR_etch

1.04	439.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

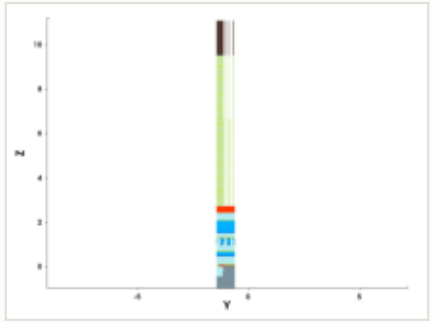

y cut at -1.035 µm

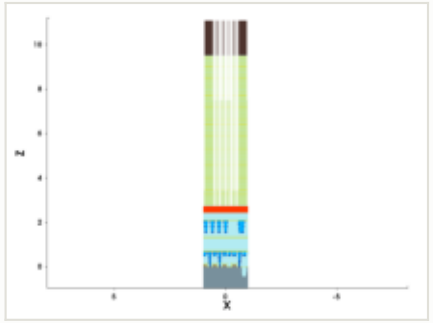

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

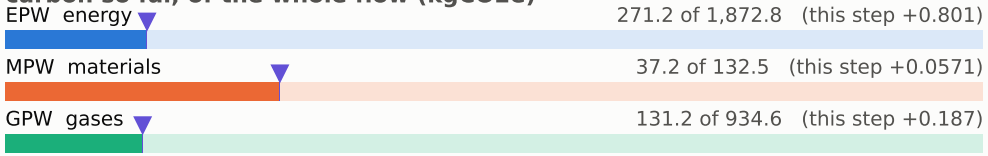

embodied carbon up to each step (kgCO2e per wafer)

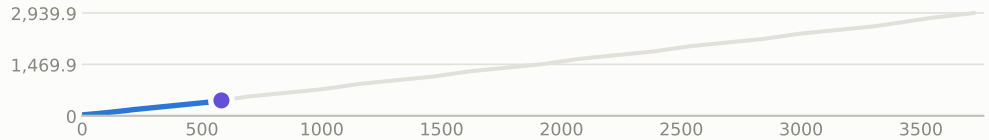

steps by process area

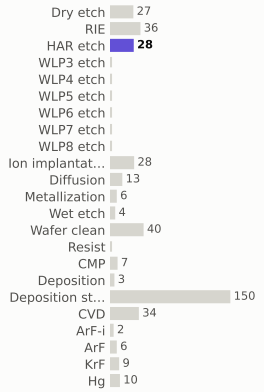

materials deposited (g)

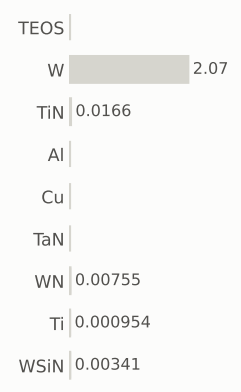

gases emitted (g)

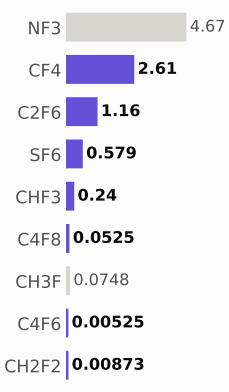

Step #5373.6667: HAR_etch

etch_noop · HAR_etch

1.04	440.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

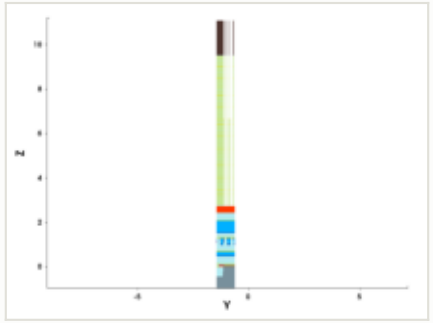

y cut at -1.035 µm

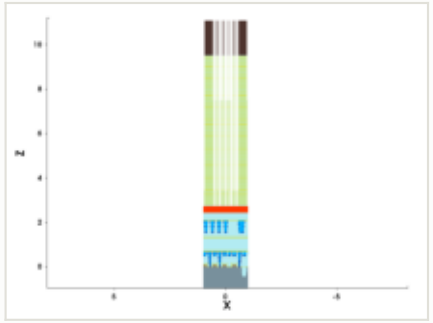

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

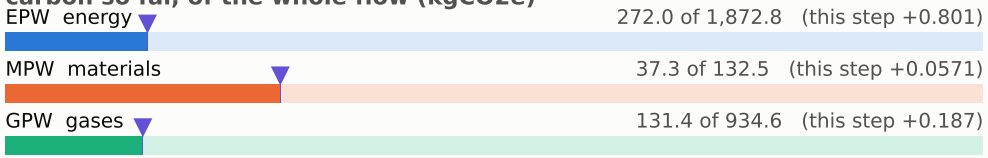

embodied carbon up to each step (kgCO2e per wafer)

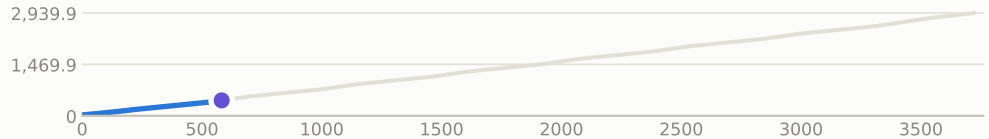

steps by process area

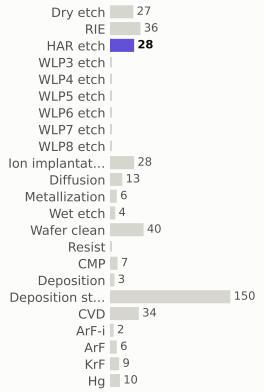

materials deposited (g)

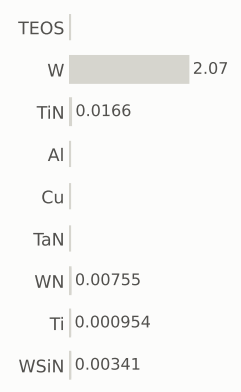

gases emitted (g)

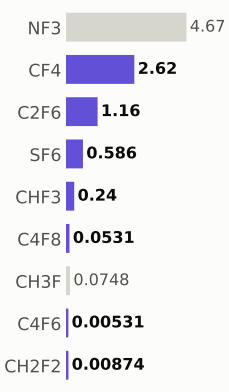

Step #5373.7333: HAR_etch

etch_noop · HAR_etch

1.04	441.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

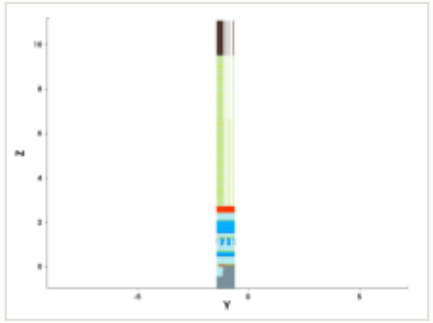

y cut at -1.035 µm

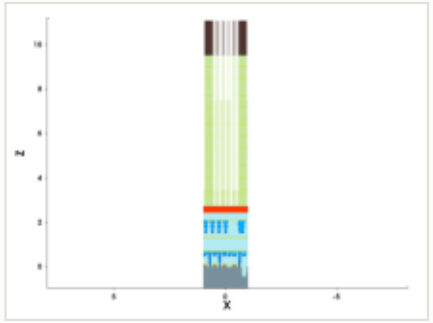

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

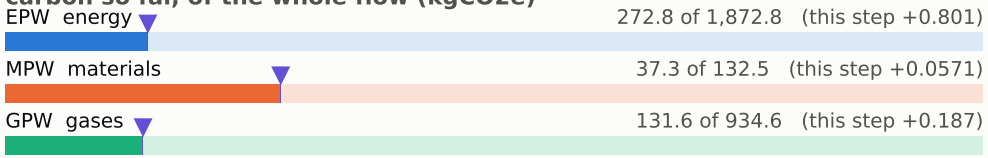

embodied carbon up to each step (kgCO2e per wafer)

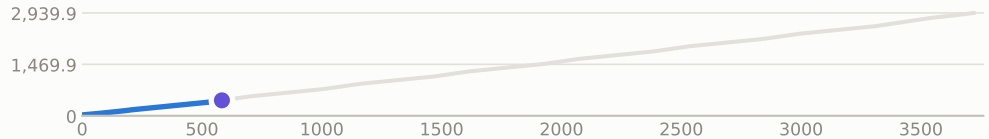

steps by process area

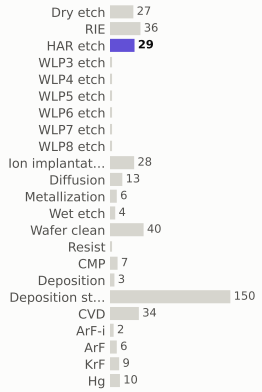

materials deposited (g)

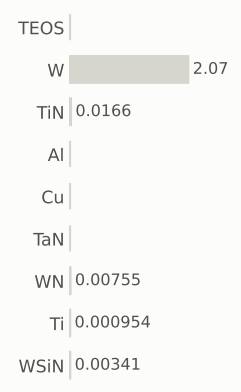

gases emitted (g)

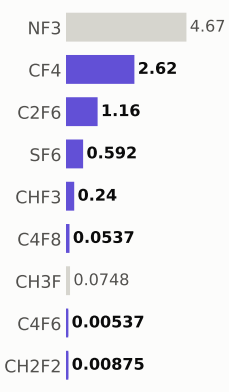

Step #5373.8: HAR_etch

etch_noop · HAR_etch

1.04	442.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

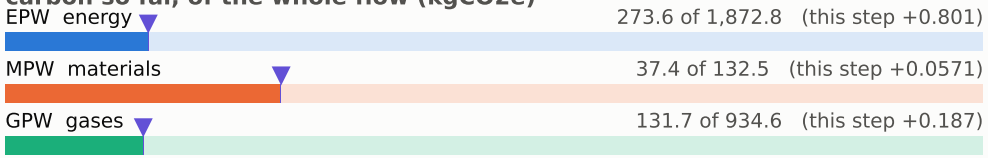

embodied carbon up to each step (kgCO2e per wafer)

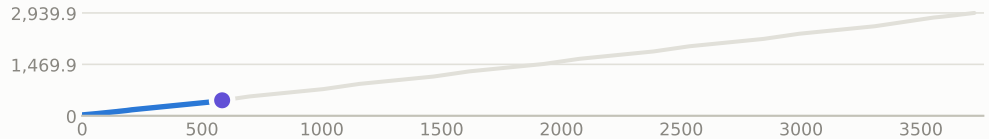

x cut at 0.000 µm

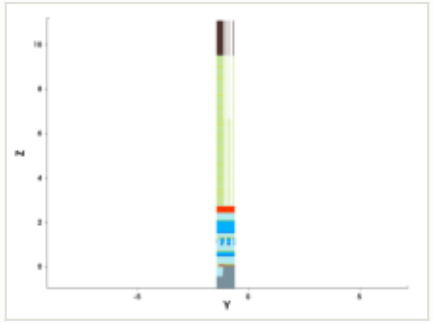

y cut at -1.035 µm

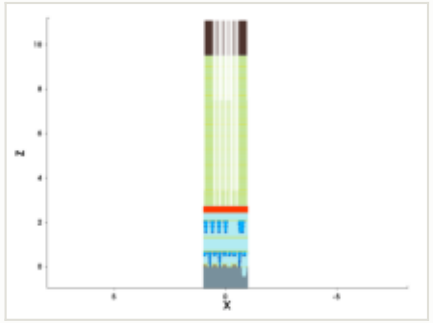

mask for this step

no mask for this step

steps by process area

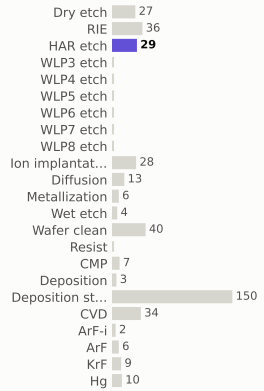

materials deposited (g)

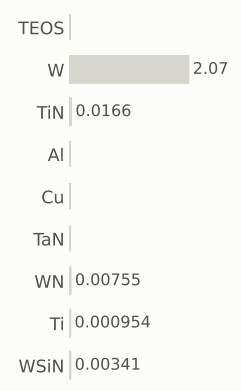

gases emitted (g)



Step #5373.8667: HAR_etch

etch_noop · HAR_etch

1.04	443.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

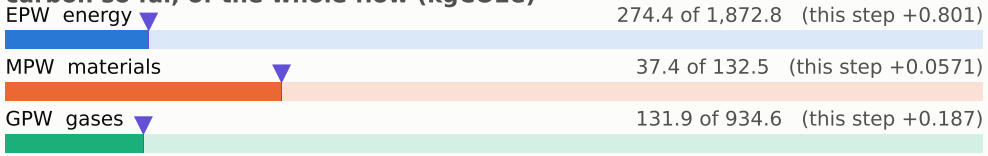

embodied carbon up to each step (kgCO2e per wafer)

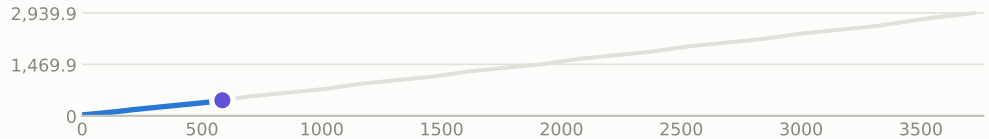

x cut at 0.000 µm

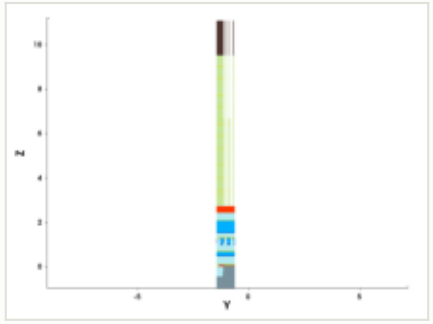

y cut at -1.035 µm

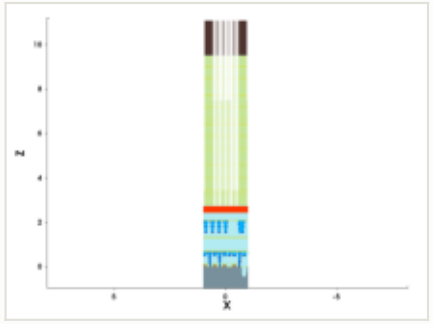

mask for this step

no mask for this step

steps by process area

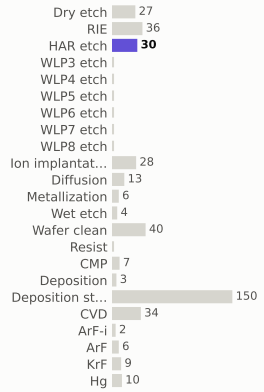

materials deposited (g)

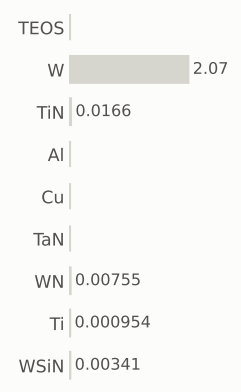

gases emitted (g)

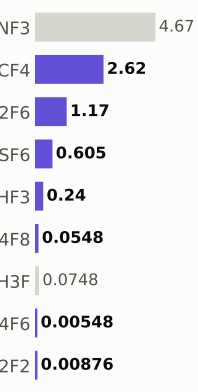

Step #5373.9333: HAR_etch

etch_noop · HAR_etch

1.04	444.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

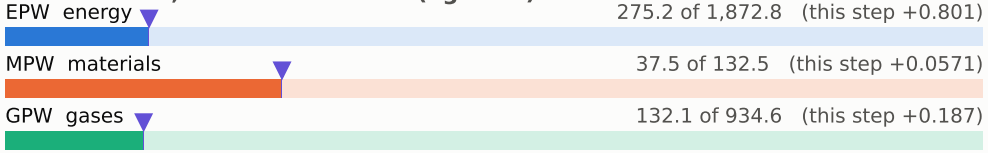

embodied carbon up to each step (kgCO2e per wafer)

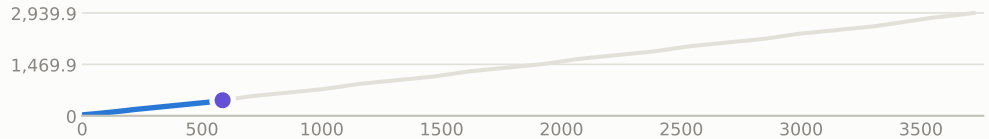

x cut at 0.000 µm

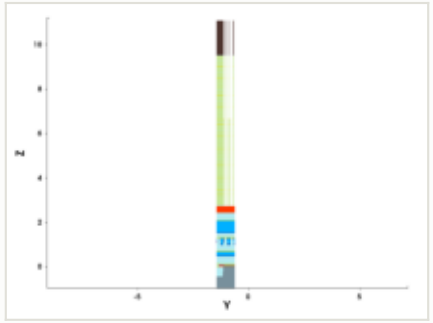

y cut at -1.035 µm

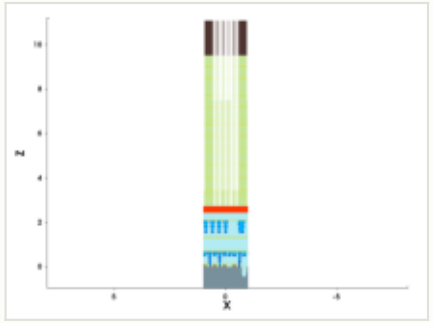

mask for this step

no mask for this step

steps by process area

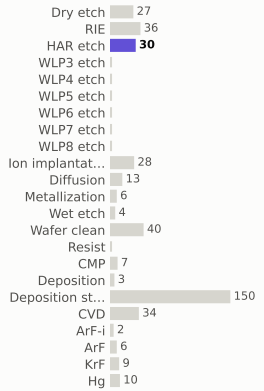

materials deposited (g)

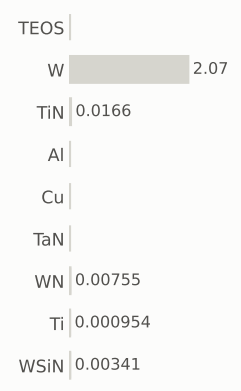

gases emitted (g)

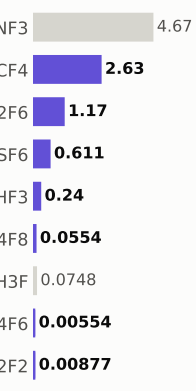

Step #5374: HAR_etch

etch_noop · HAR_etch

1.04	445.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

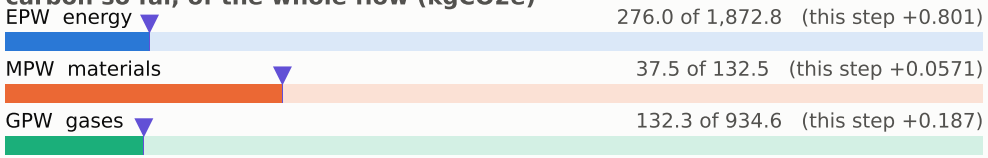

embodied carbon up to each step (kgCO2e per wafer)

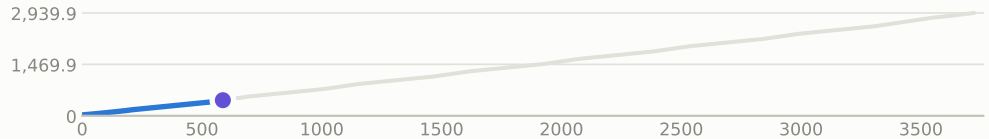

x cut at 0.000 µm

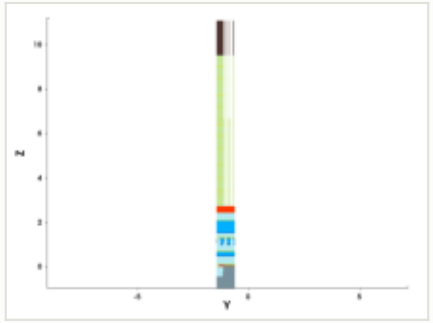

y cut at -1.035 µm

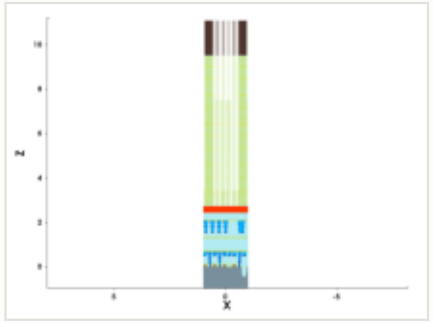

mask for this step

no mask for this step

steps by process area

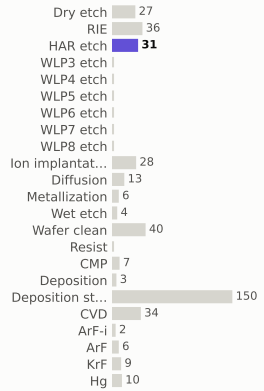

materials deposited (g)

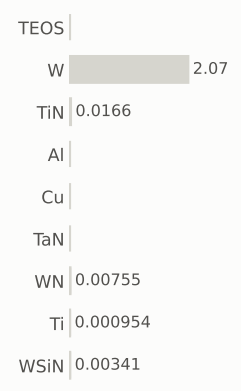

gases emitted (g)

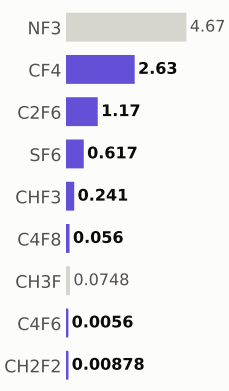

Step #5374.0667: HAR_etch

etch_noop · HAR_etch

1.04	446.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

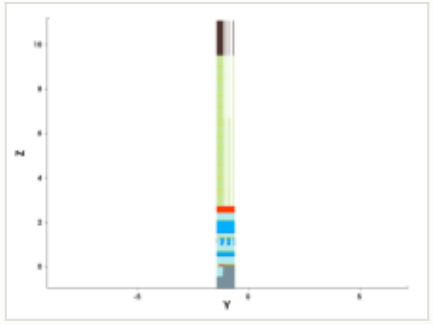

y cut at -1.035 µm

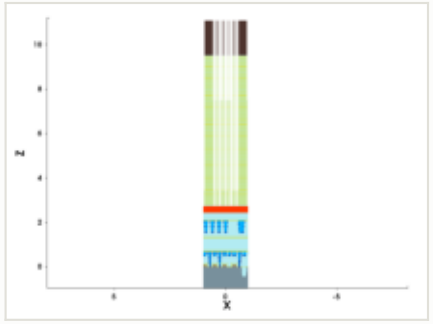

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

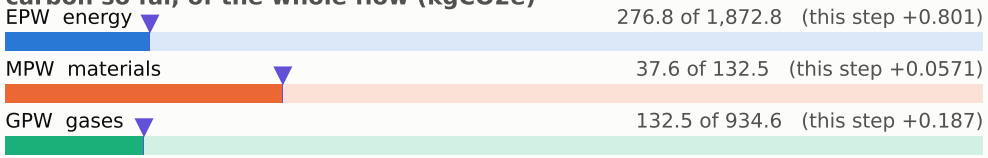

embodied carbon up to each step (kgCO2e per wafer)

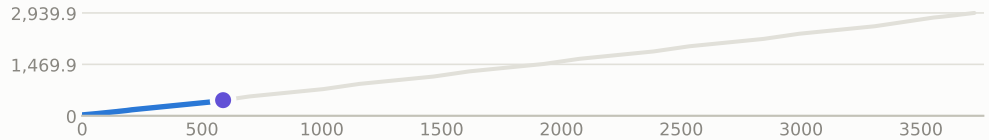

steps by process area

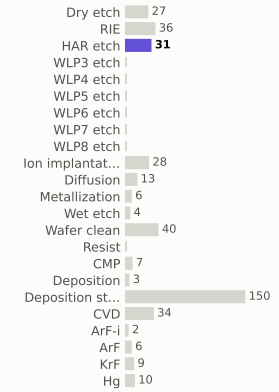

materials deposited (g)

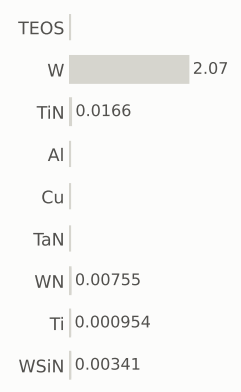

gases emitted (g)

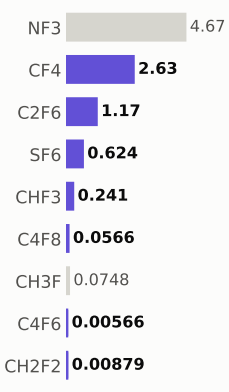

Step #5374.1333: HAR_etch

etch_noop · HAR_etch

1.04	448.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

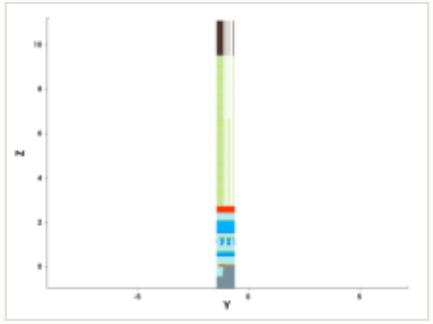

y cut at -1.035 µm

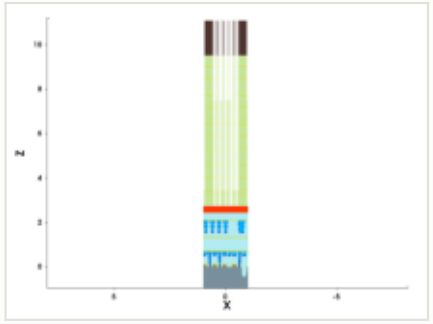

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

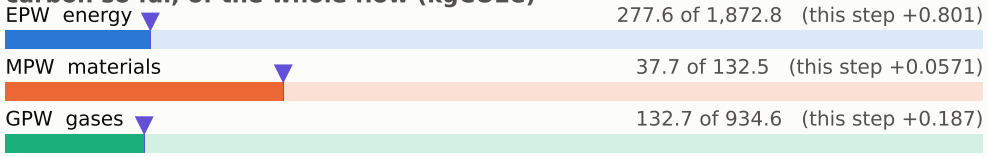

embodied carbon up to each step (kgCO2e per wafer)

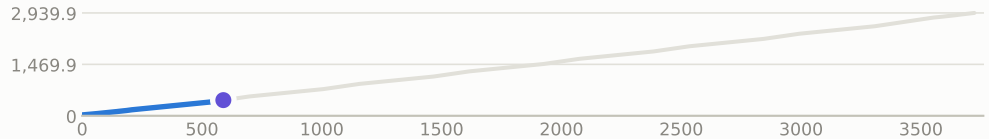

steps by process area

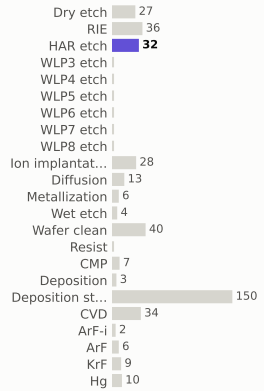

materials deposited (g)

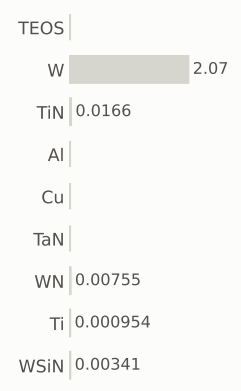

gases emitted (g)

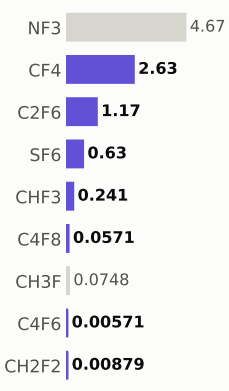

Step #5374.2: HAR_etch

etch_noop · HAR_etch

1.04	449.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

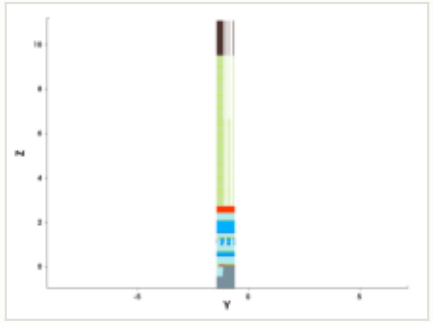

y cut at -1.035 µm

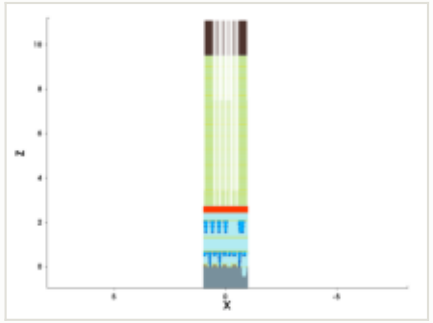

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

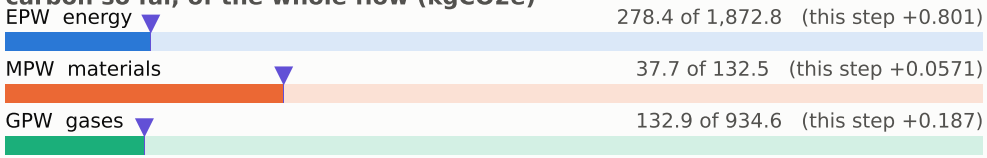

embodied carbon up to each step (kgCO2e per wafer)

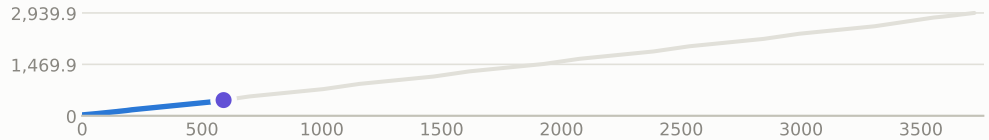

steps by process area

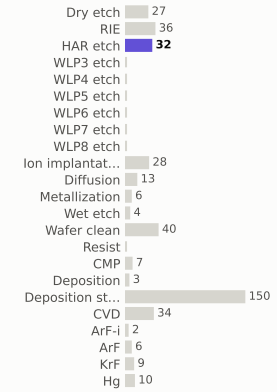

materials deposited (g)

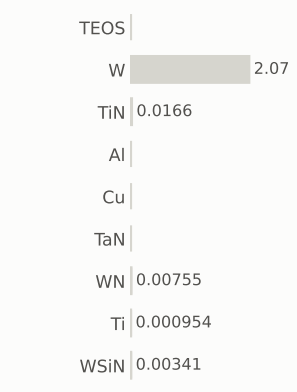

gases emitted (g)

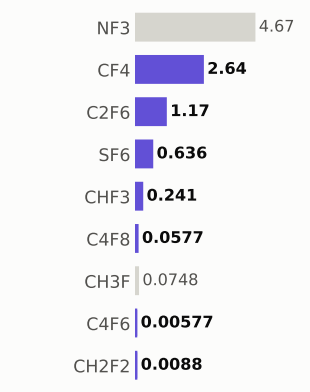

Step #5374.2667: HAR_etch

etch_noop · HAR_etch

1.04	450.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

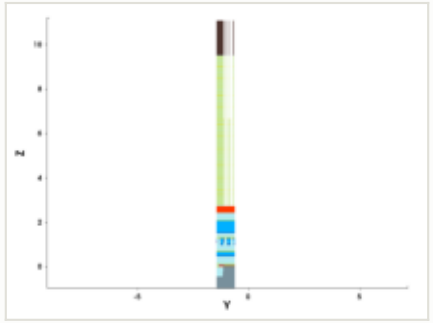

y cut at -1.035 µm

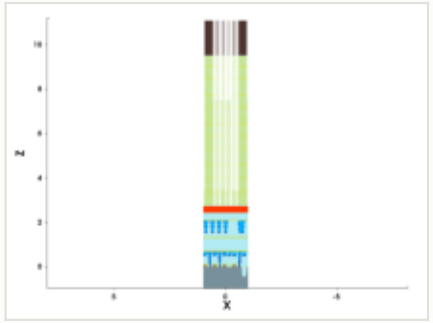

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

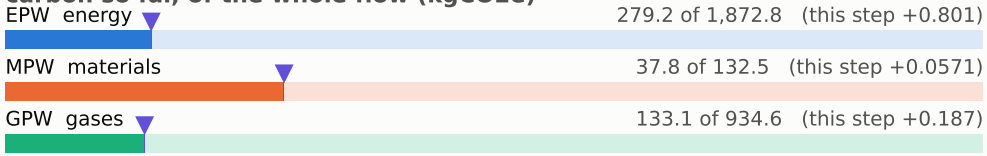

embodied carbon up to each step (kgCO2e per wafer)

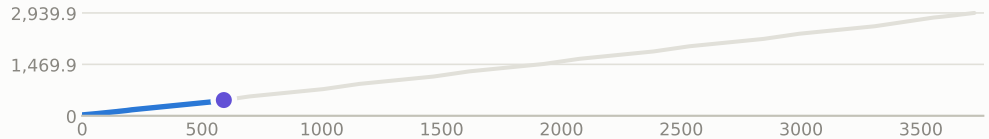

steps by process area

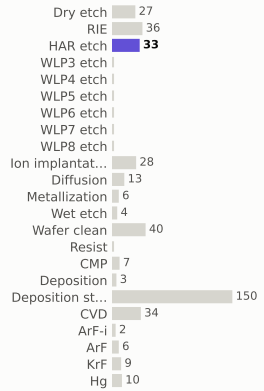

materials deposited (g)

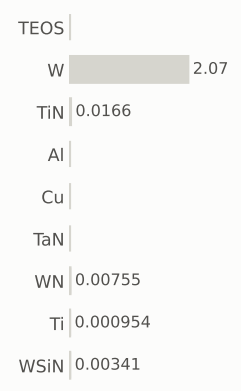

gases emitted (g)

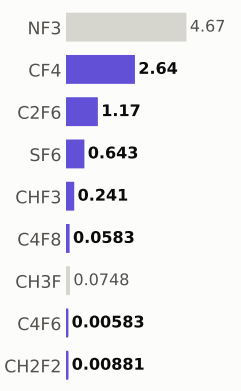

Step #5374.3333: HAR_etch

etch_noop · HAR_etch

1.04	451.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

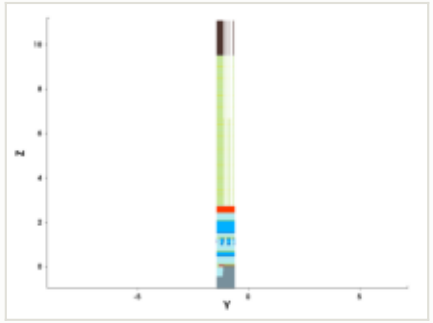

y cut at -1.035 µm

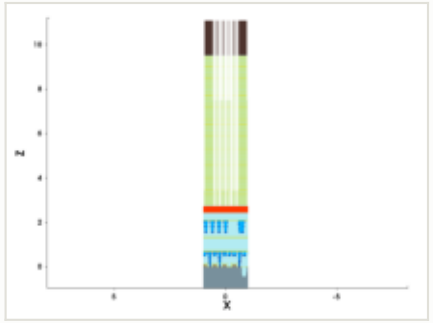

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

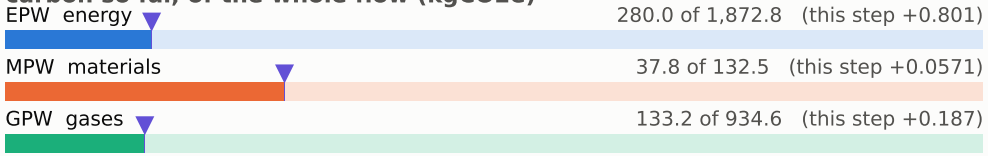

embodied carbon up to each step (kgCO2e per wafer)

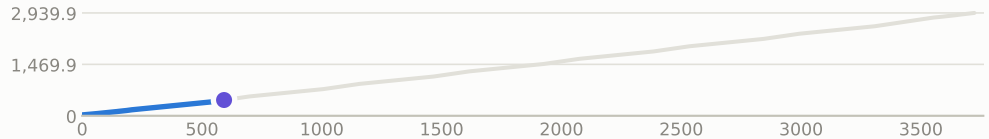

steps by process area

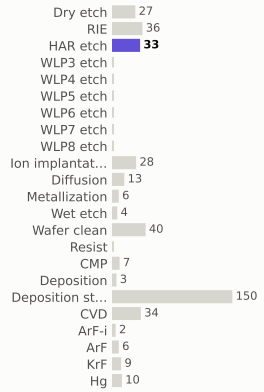

materials deposited (g)

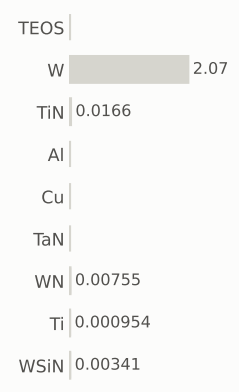

gases emitted (g)

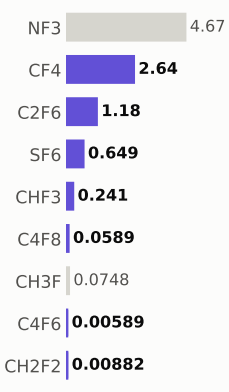

Step #5374.4: HAR_etch

etch_noop · HAR_etch

1.04	452.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

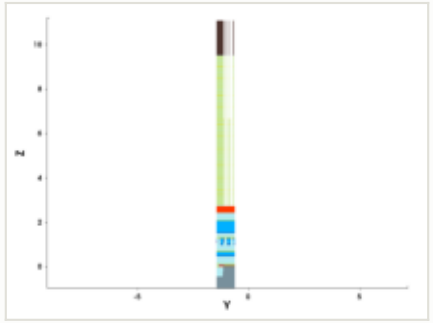

y cut at -1.035 µm

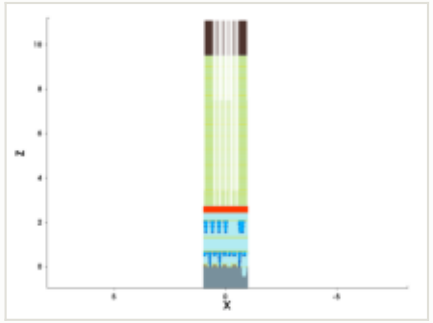

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

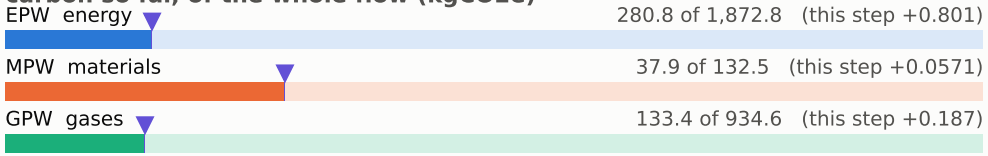

embodied carbon up to each step (kgCO2e per wafer)

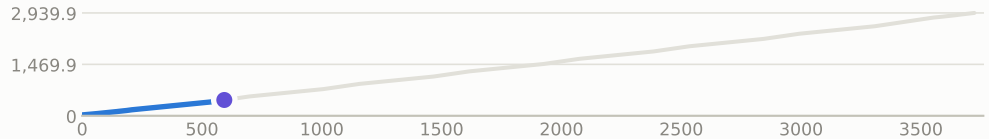

steps by process area

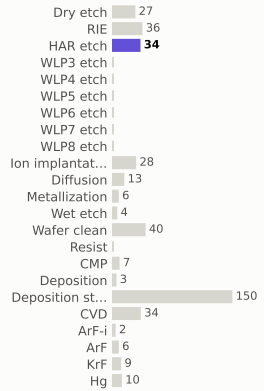

materials deposited (g)

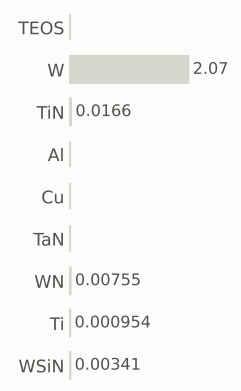

gases emitted (g)

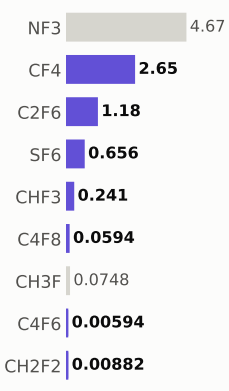

Step #5374.4667: HAR_etch

etch_noop · HAR_etch

1.04	453.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

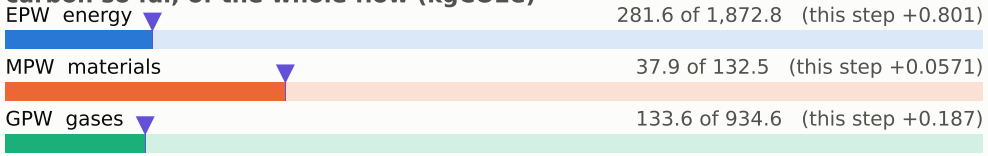

embodied carbon up to each step (kgCO2e per wafer)

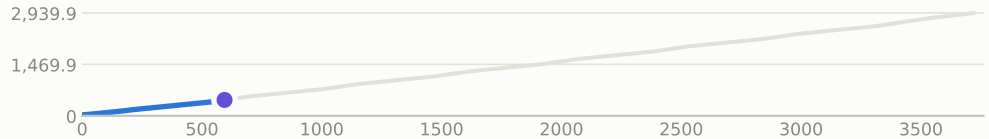

x cut at 0.000 µm

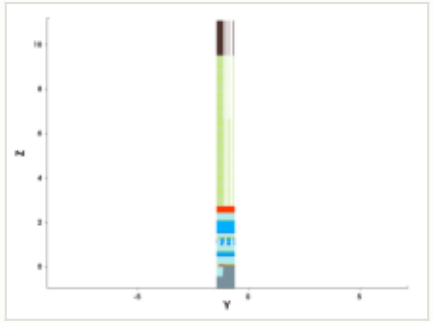

y cut at -1.035 µm

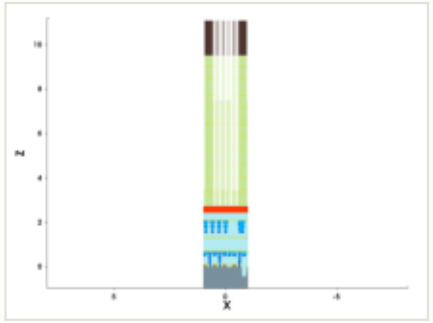

mask for this step

no mask for this step

steps by process area

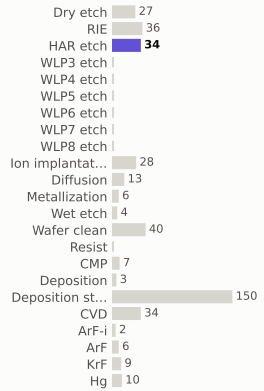

materials deposited (g)

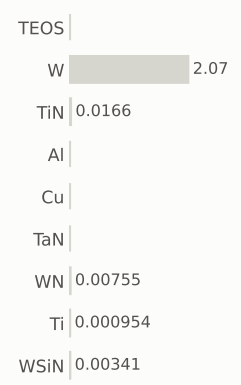

gases emitted (g)

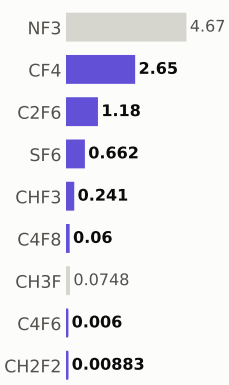

Step #5374.5333: HAR_etch

etch_noop · HAR_etch

1.04	454.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

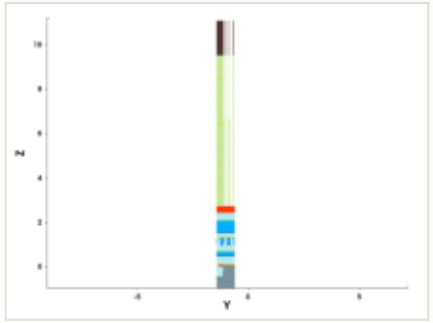

y cut at -1.035 µm

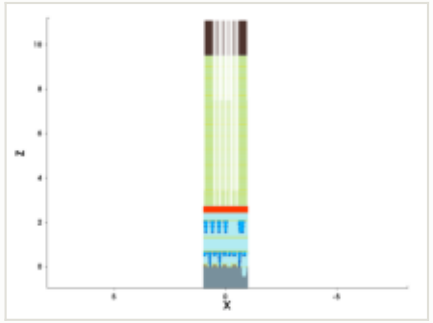

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

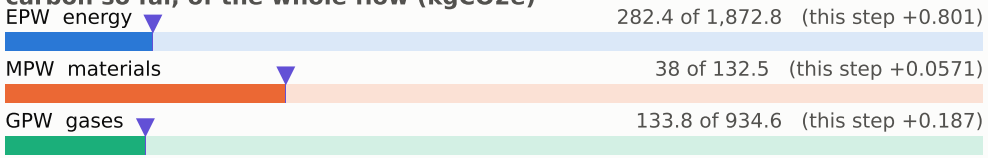

embodied carbon up to each step (kgCO2e per wafer)

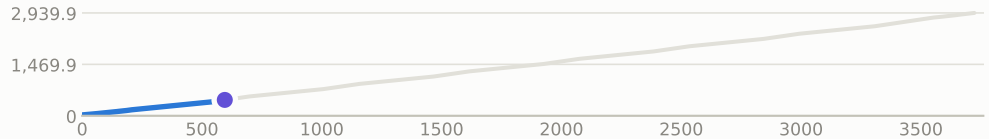

steps by process area

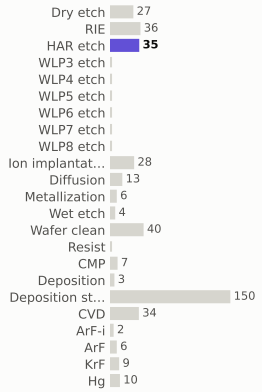

materials deposited (g)

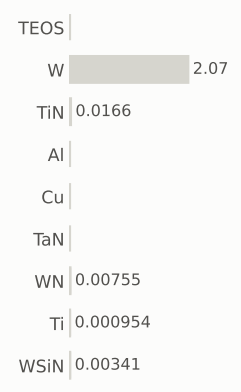

gases emitted (g)

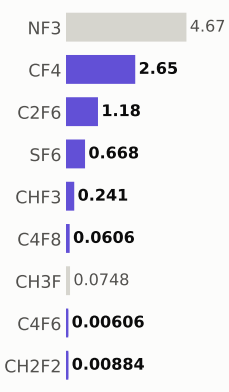

Step #5374.6: HAR_etch

etch_noop · HAR_etch

1.04	455.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

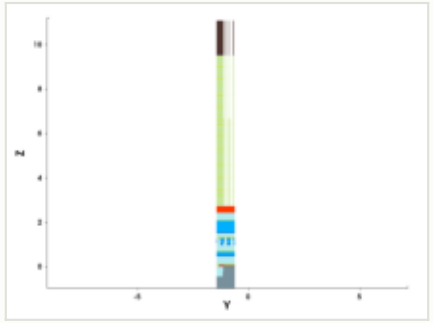

y cut at -1.035 µm

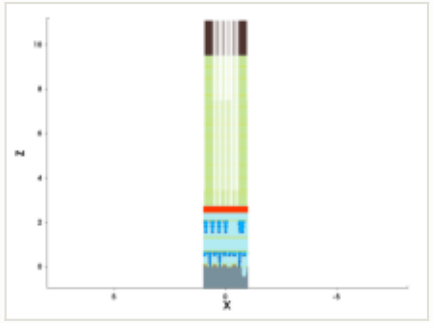

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 283.2 of 1,872.8 (this step +0.801)

MPW materials — 38 of 132.5 (this step +0.0571)

GPW gases — 134.0 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

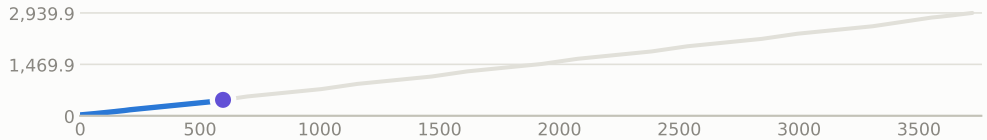

steps by process area

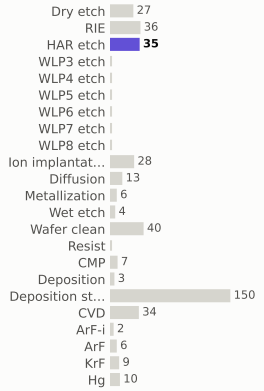

materials deposited (g)



gases emitted (g)

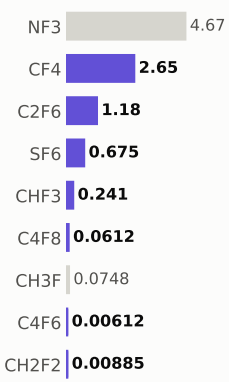

Step #5374.6667: HAR_etch

etch_noop · HAR_etch

1.04	456.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

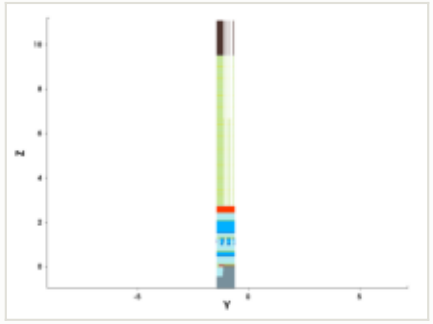

y cut at -1.035 µm

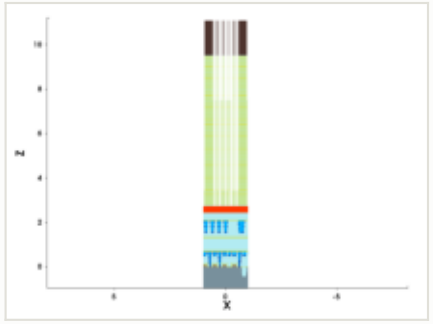

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

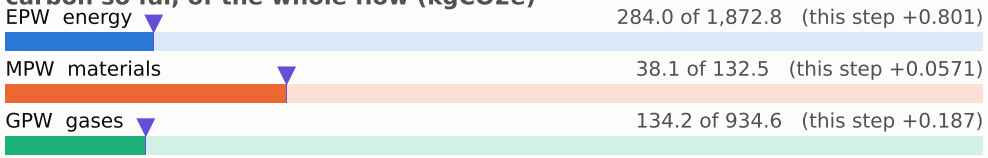

embodied carbon up to each step (kgCO2e per wafer)

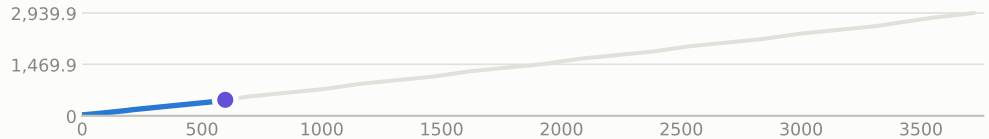

steps by process area

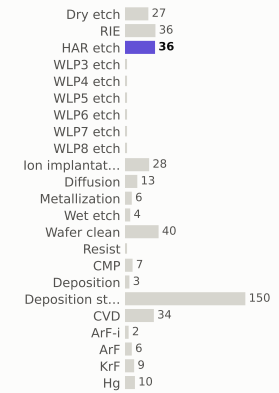

materials deposited (g)

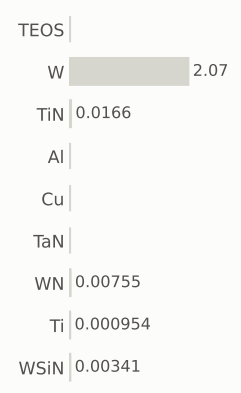

gases emitted (g)

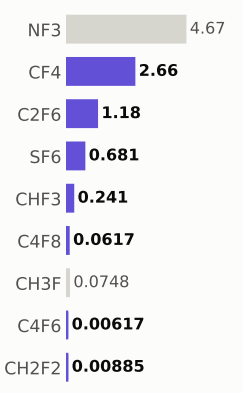

Step #5374.7333: HAR_etch

etch_noop · HAR_etch

1.04	457.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

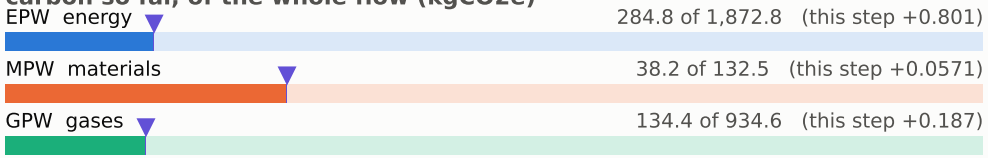

embodied carbon up to each step (kgCO2e per wafer)

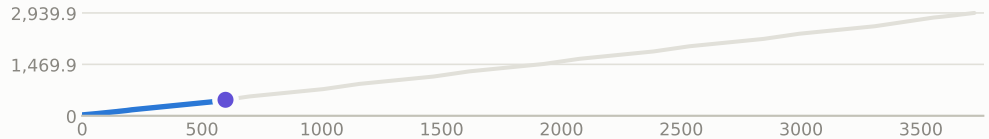

x cut at 0.000 µm

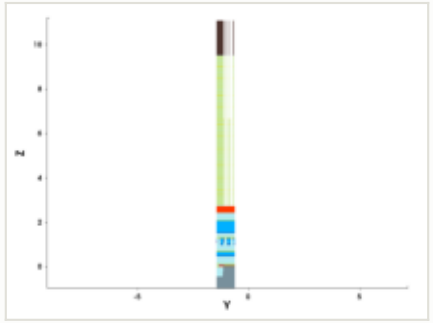

y cut at -1.035 µm

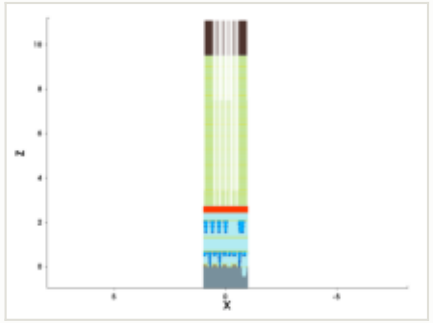

mask for this step

no mask for this step

steps by process area

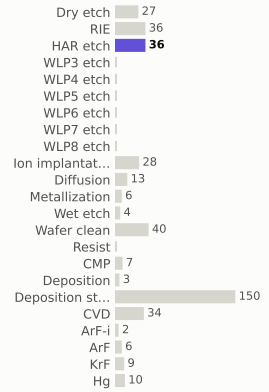

materials deposited (g)

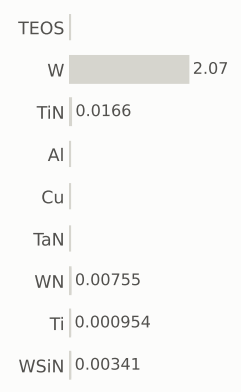

gases emitted (g)

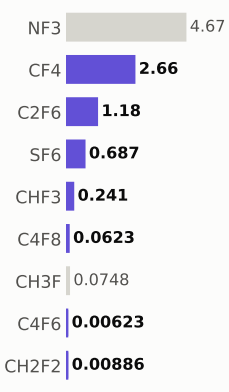

Step #5374.8: HAR_etch

etch_noop · HAR_etch

1.04	458.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

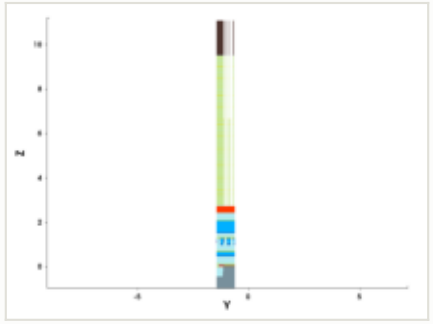

y cut at -1.035 µm

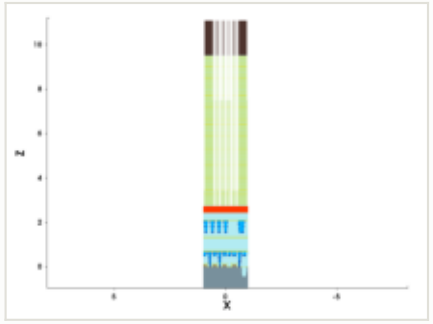

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

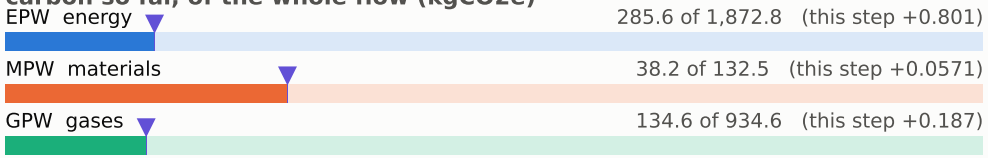

embodied carbon up to each step (kgCO2e per wafer)

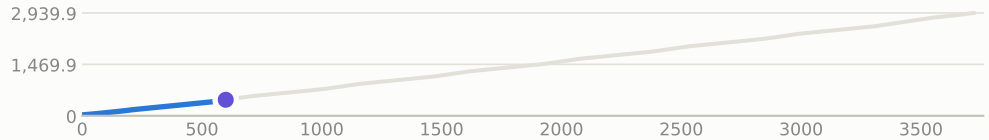

steps by process area

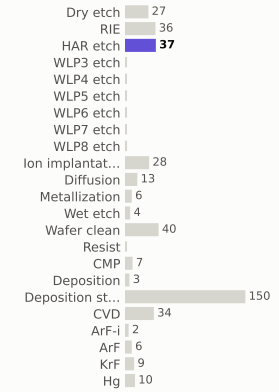

materials deposited (g)



gases emitted (g)



Step #5374.8667: HAR_etch

etch_noop · HAR_etch

1.04	459.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

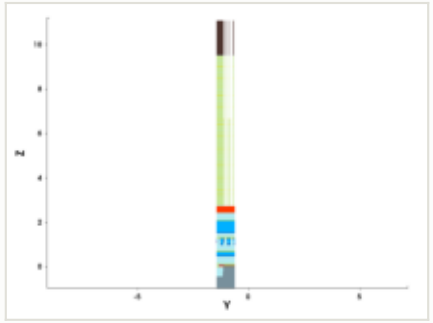

y cut at -1.035 µm

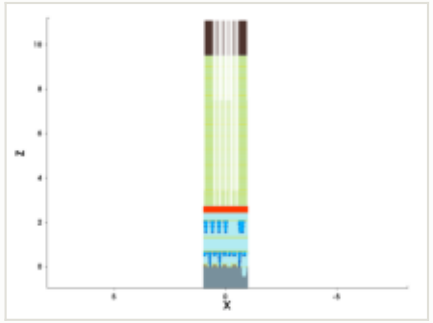

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

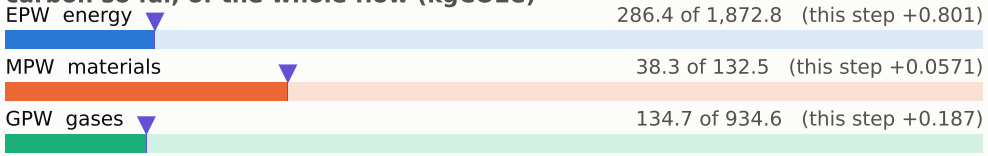

embodied carbon up to each step (kgCO2e per wafer)

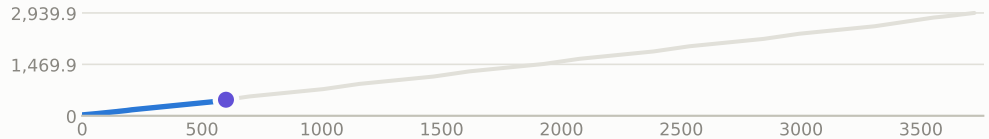

steps by process area

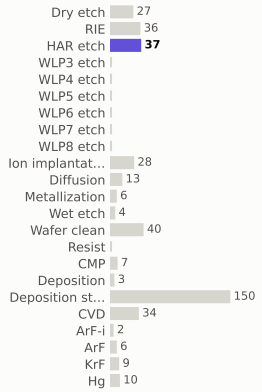

materials deposited (g)

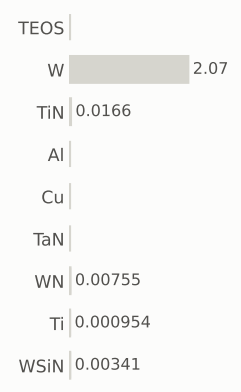

gases emitted (g)

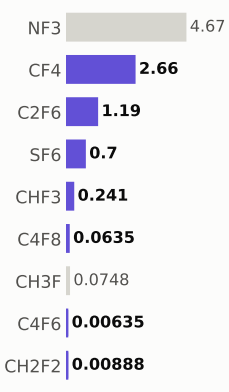

Step #5374.9333: HAR_etch

etch_noop · HAR_etch

1.04	460.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

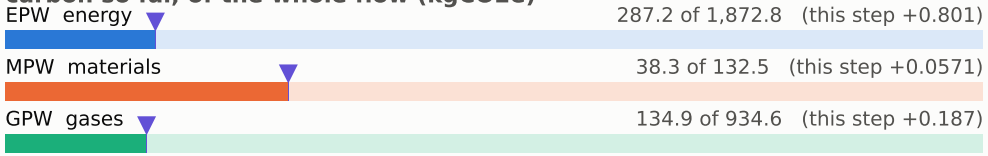

embodied carbon up to each step (kgCO2e per wafer)

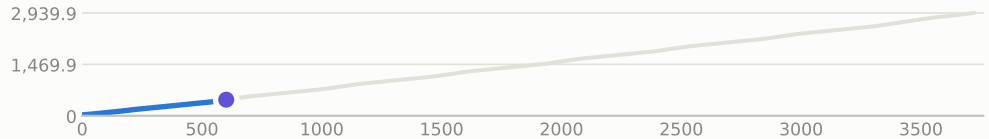

x cut at 0.000 µm

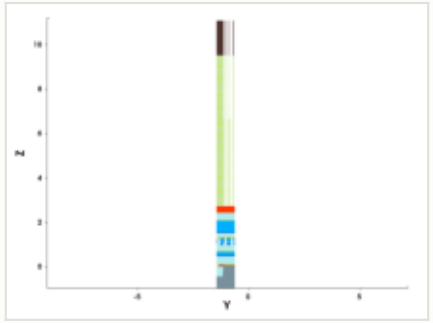

y cut at -1.035 µm

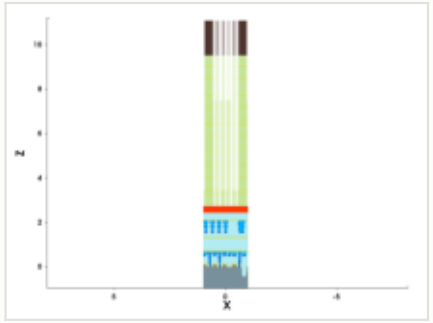

mask for this step

no mask for this step

steps by process area

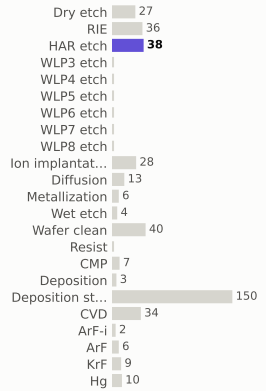

materials deposited (g)

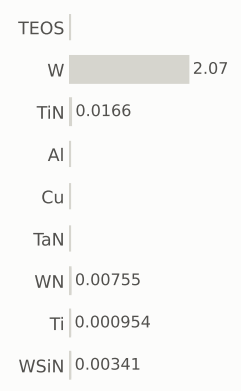

gases emitted (g)



Step #5375: HAR_etch

etch_noop · HAR_etch

1.04	461.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 288.0 of 1,872.8 (this step +0.801)

MPW materials — 38.4 of 132.5 (this step +0.0571)

GPW gases — 135.1 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

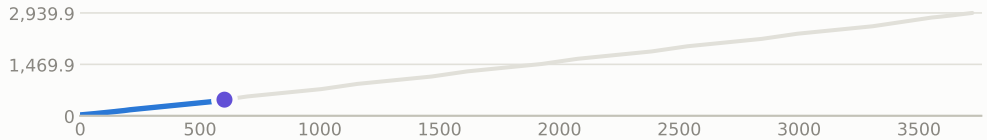

x cut at 0.000 µm

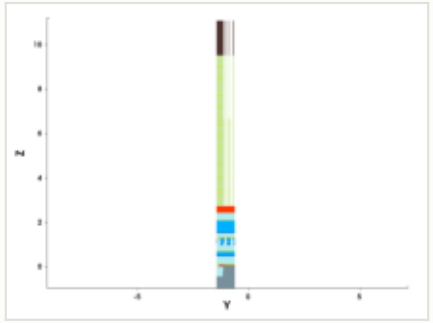

y cut at -1.035 µm

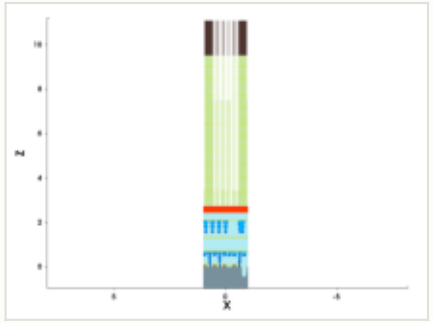

mask for this step

no mask for this step

steps by process area

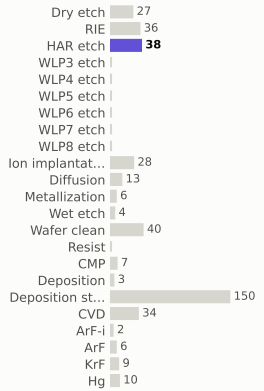

materials deposited (g)

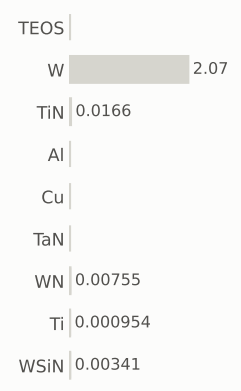

gases emitted (g)

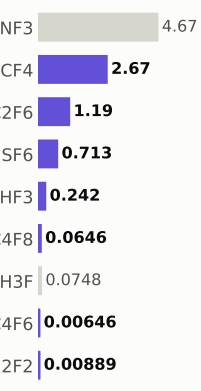

Step #5375.0667: HAR_etch

etch_noop · HAR_etch

1.04	462.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

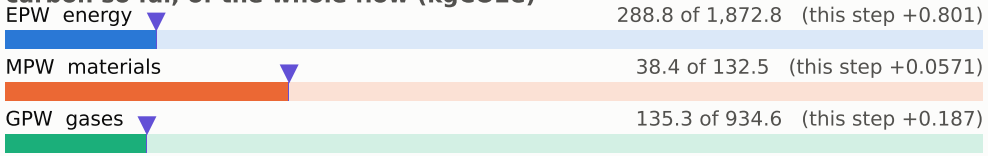

embodied carbon up to each step (kgCO2e per wafer)

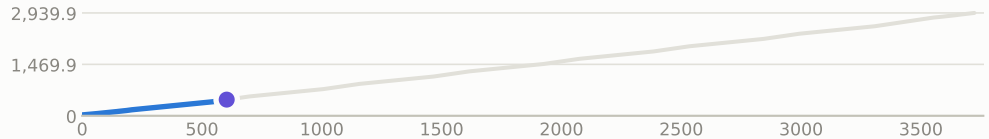

x cut at 0.000 µm

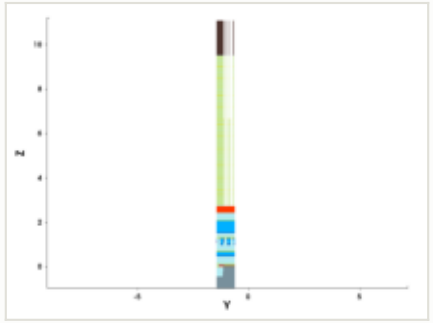

y cut at -1.035 µm

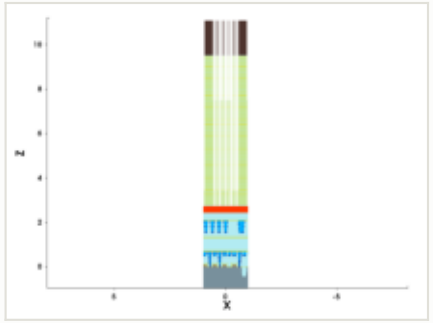

mask for this step

no mask for this step

steps by process area

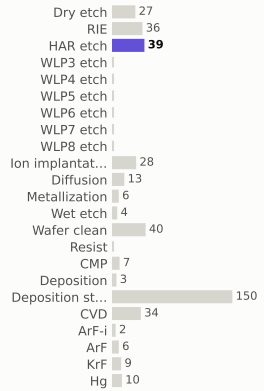

materials deposited (g)

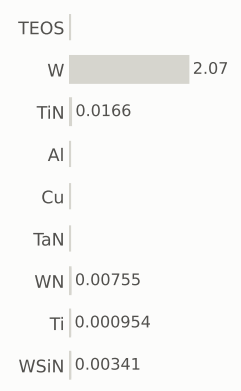

gases emitted (g)



Step #5375.1333: HAR_etch

etch_noop · HAR_etch

1.04	463.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

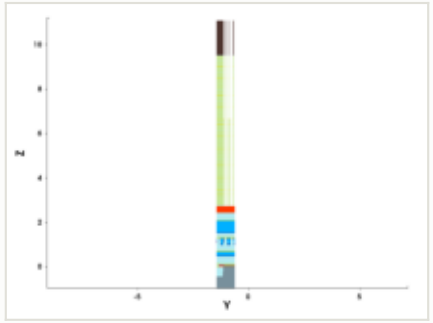

y cut at -1.035 µm

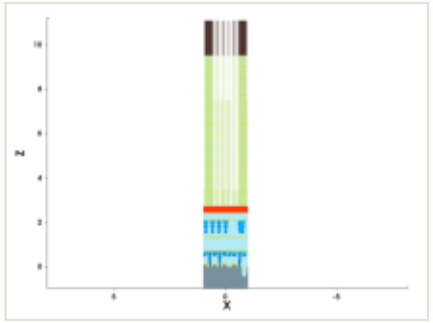

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

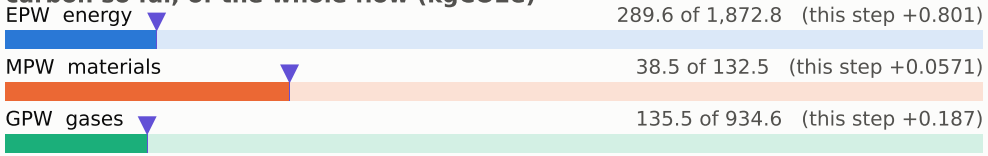

embodied carbon up to each step (kgCO2e per wafer)

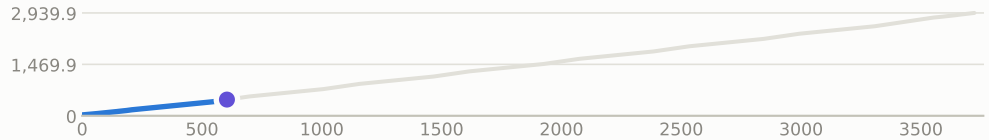

steps by process area

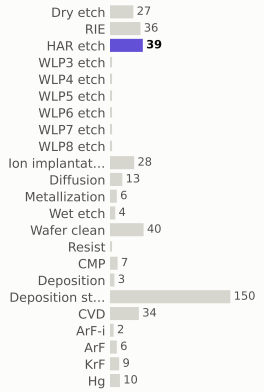

materials deposited (g)

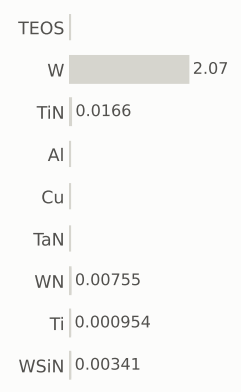

gases emitted (g)

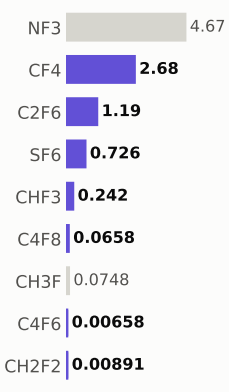

Step #5375.2: HAR_etch

etch_noop · HAR_etch

1.04	464.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

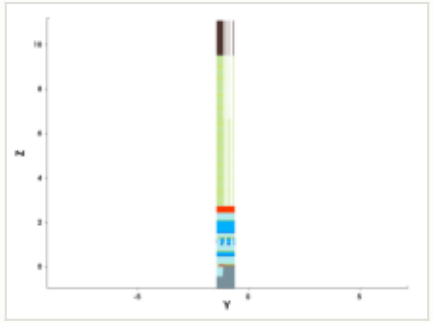

y cut at -1.035 µm

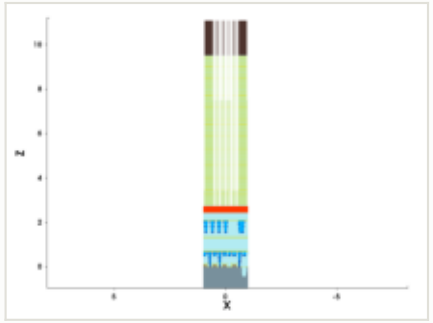

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

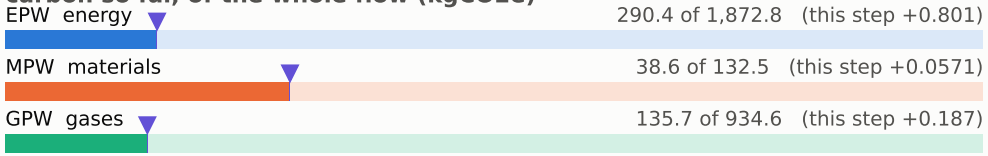

embodied carbon up to each step (kgCO2e per wafer)

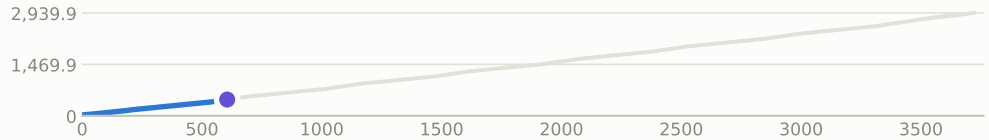

steps by process area

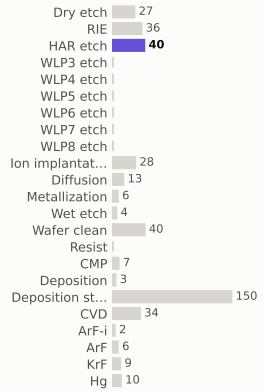

materials deposited (g)

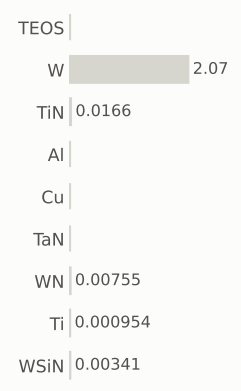

gases emitted (g)

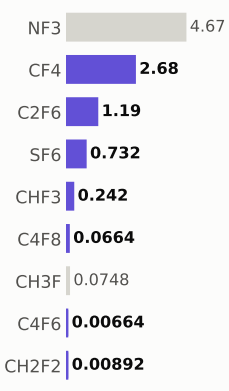

Step #5375.2667: HAR_etch

etch_noop · HAR_etch

1.04	465.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

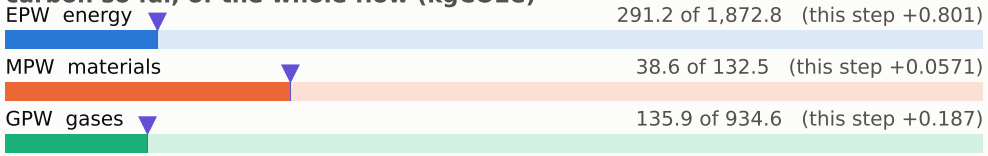

embodied carbon up to each step (kgCO2e per wafer)

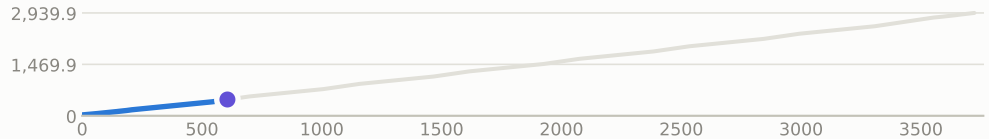

x cut at 0.000 µm

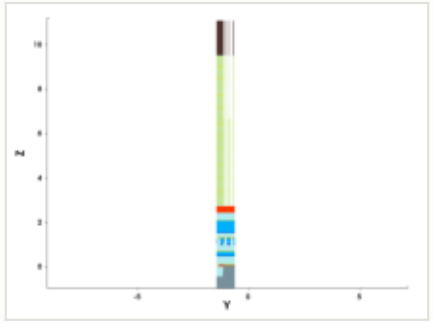

y cut at -1.035 µm

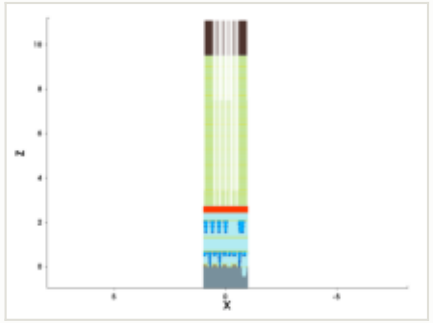

mask for this step

no mask for this step

steps by process area

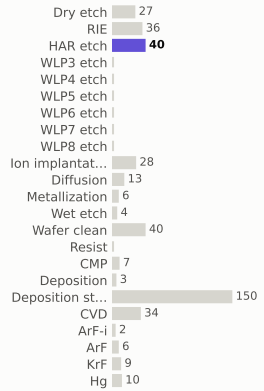

materials deposited (g)

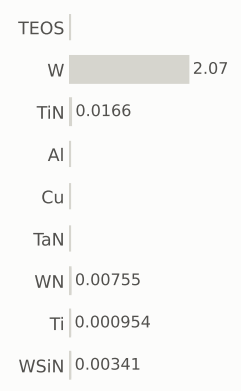

gases emitted (g)

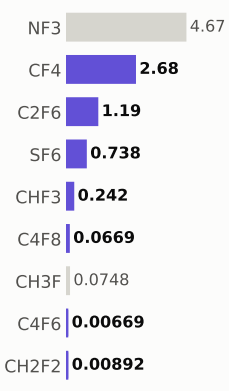

Step #5375.3333: HAR_etch

etch_noop · HAR_etch

1.04	466.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

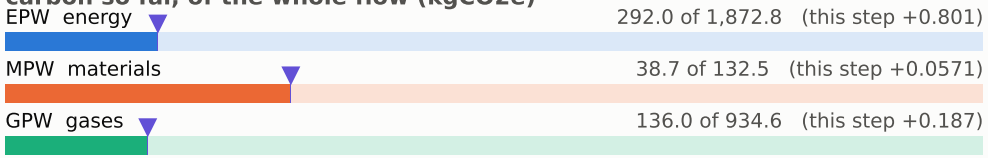

embodied carbon up to each step (kgCO2e per wafer)

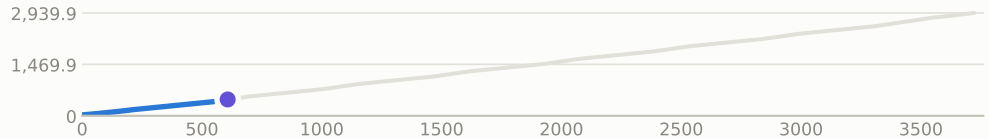

x cut at 0.000 µm

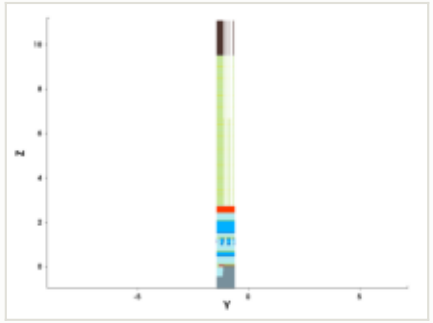

y cut at -1.035 µm

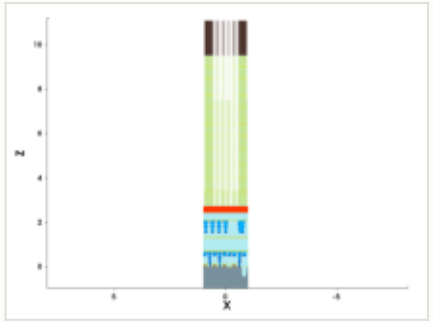

mask for this step

no mask for this step

steps by process area

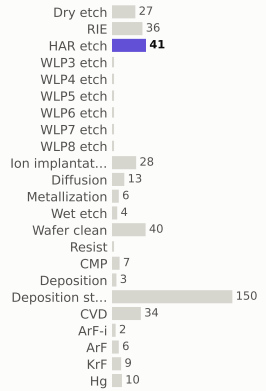

materials deposited (g)

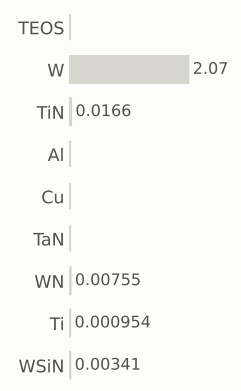

gases emitted (g)

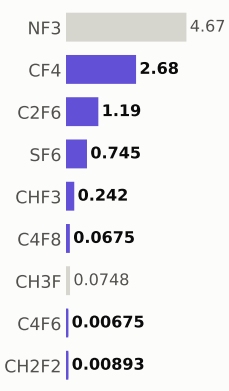

Step #5375.4: HAR_etch

etch_noop · HAR_etch

1.04	467.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

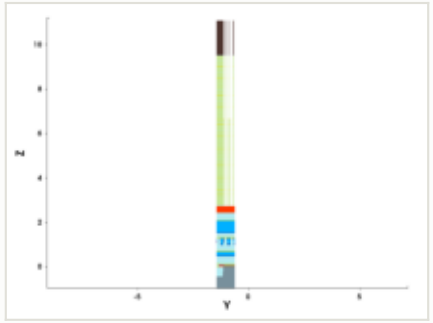

y cut at -1.035 µm

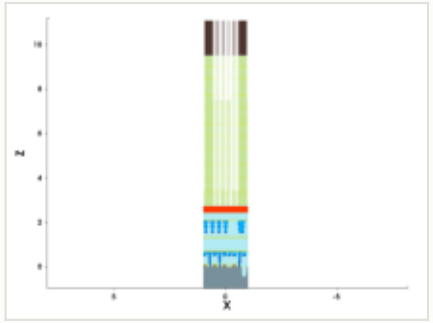

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

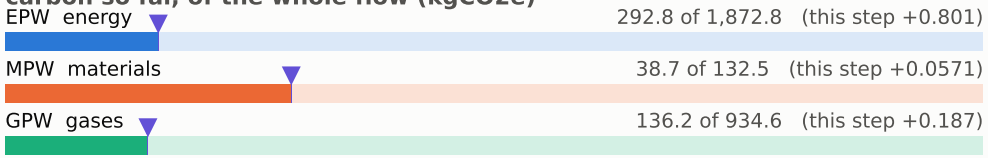

embodied carbon up to each step (kgCO2e per wafer)

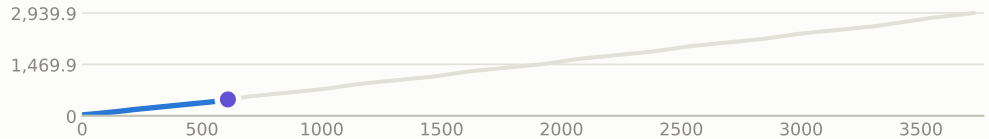

steps by process area

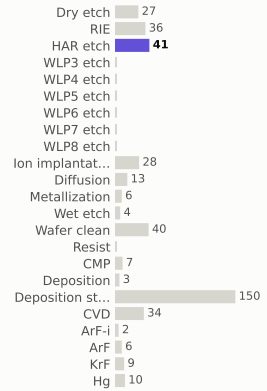

materials deposited (g)

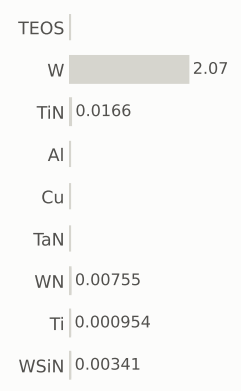

gases emitted (g)

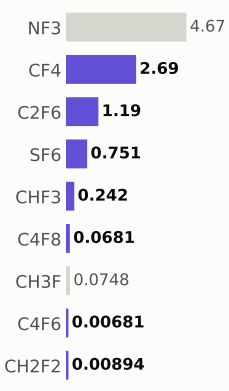

Step #5375.4667: HAR_etch

etch_noop · HAR_etch

1.04	468.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

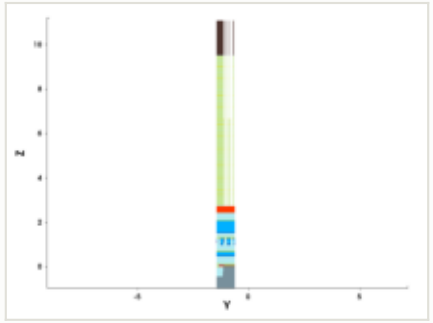

y cut at -1.035 µm

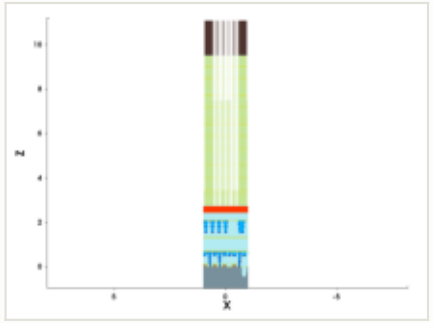

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

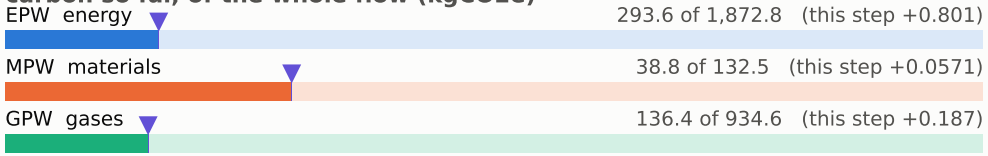

embodied carbon up to each step (kgCO2e per wafer)

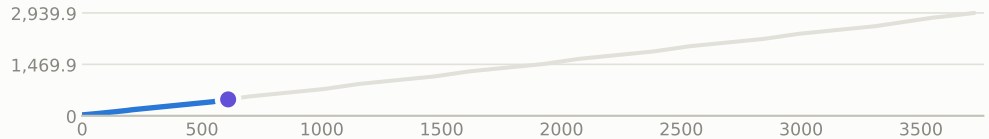

steps by process area

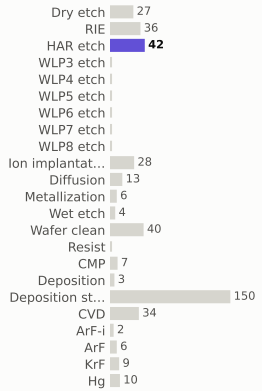

materials deposited (g)

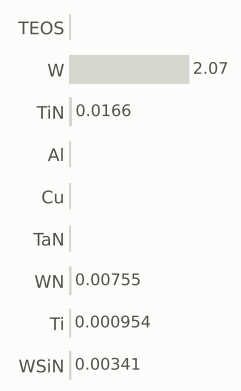

gases emitted (g)

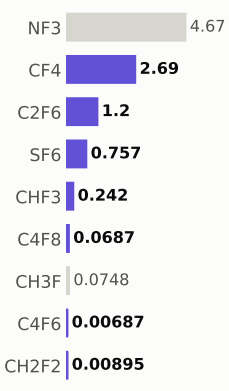

Step #5375.5333: HAR_etch

etch_noop · HAR_etch

1.04	469.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

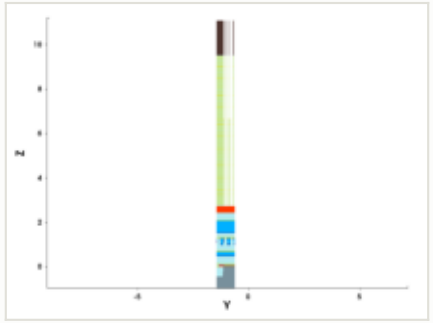

y cut at -1.035 µm

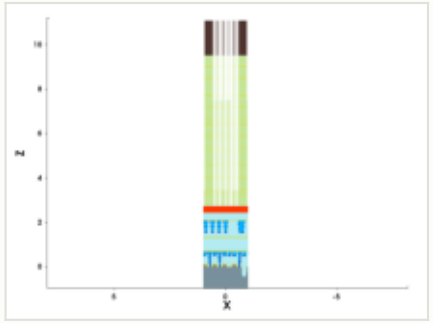

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

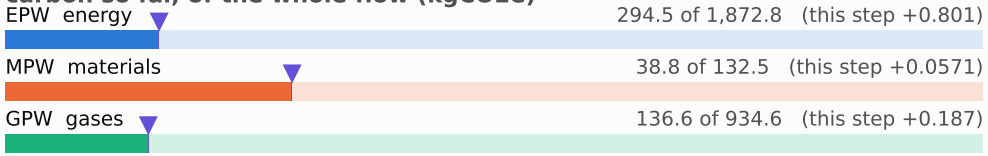

embodied carbon up to each step (kgCO2e per wafer)

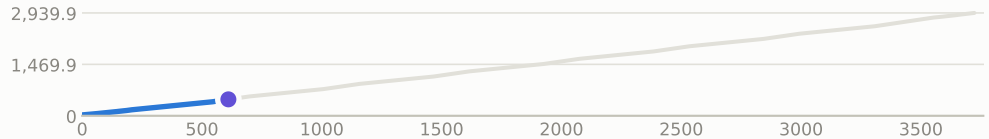

steps by process area

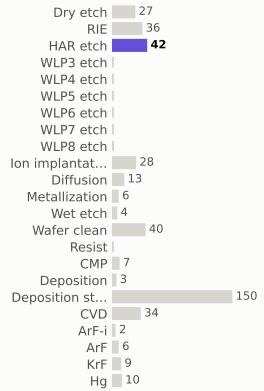

materials deposited (g)

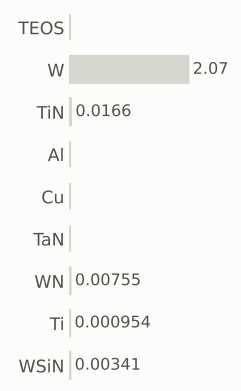

gases emitted (g)

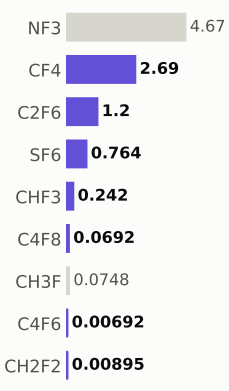

Step #5375.6: HAR_etch

etch_noop · HAR_etch

1.04	471.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

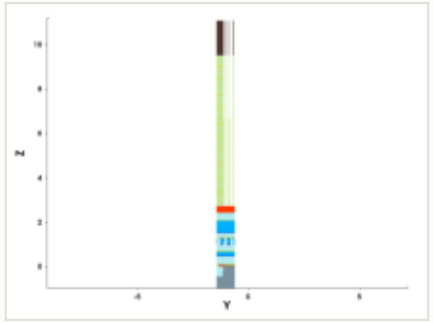

y cut at -1.035 µm

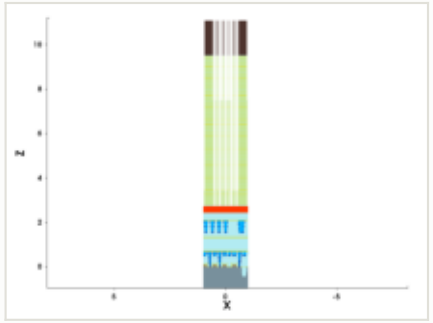

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

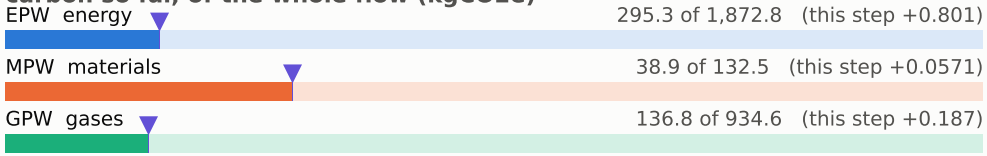

embodied carbon up to each step (kgCO2e per wafer)

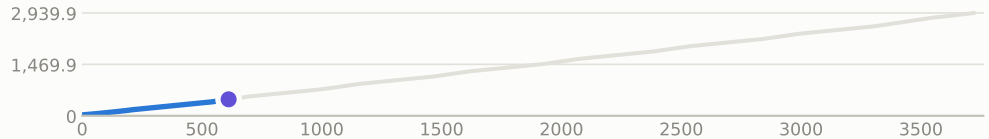

steps by process area

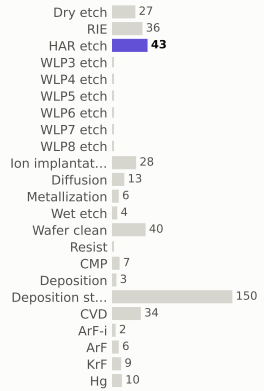

materials deposited (g)

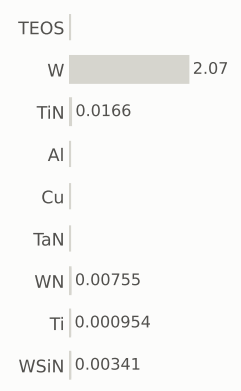

gases emitted (g)

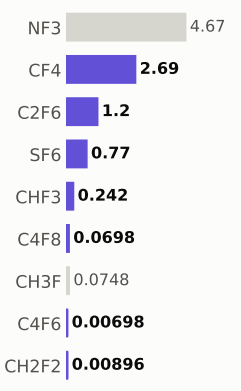

Step #5375.6667: HAR_etch

etch_noop · HAR_etch

1.04	472.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

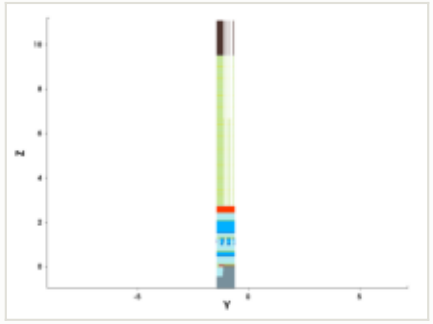

y cut at -1.035 µm

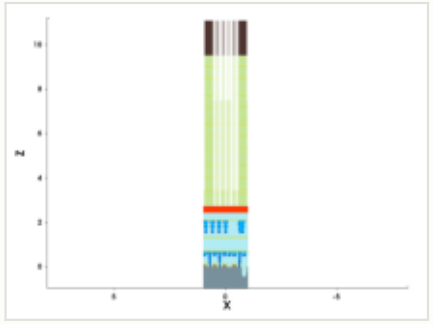

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

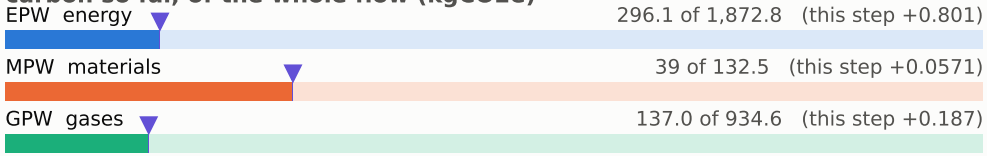

embodied carbon up to each step (kgCO2e per wafer)

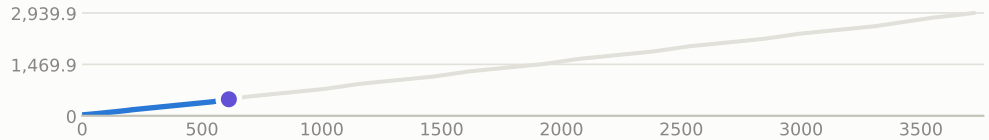

steps by process area

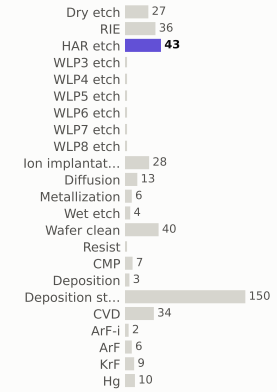

materials deposited (g)



gases emitted (g)



Step #5375.7333: HAR_etch

etch_noop · HAR_etch

1.04	473.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

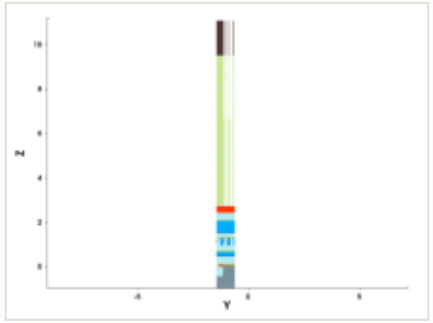

y cut at -1.035 µm

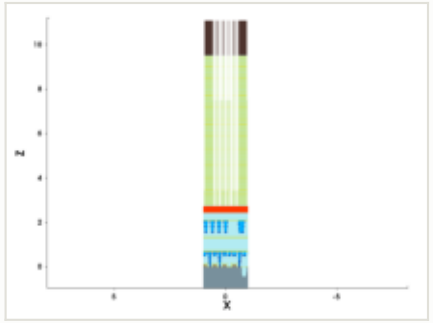

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

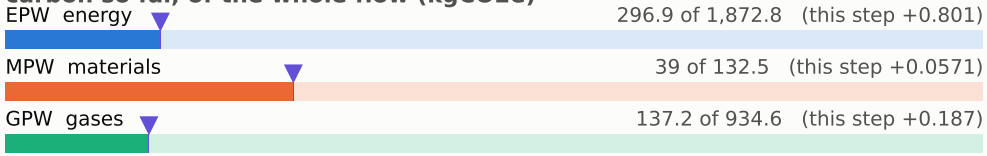

embodied carbon up to each step (kgCO2e per wafer)

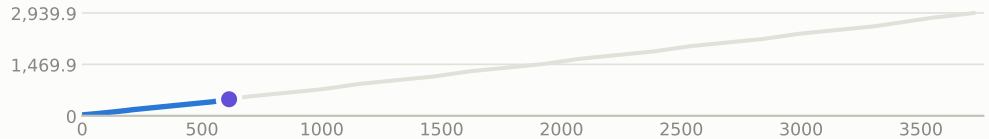

steps by process area

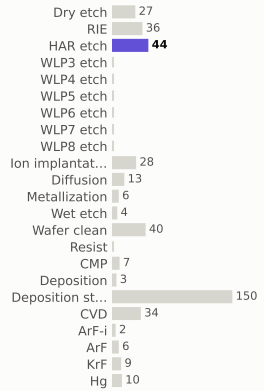

materials deposited (g)

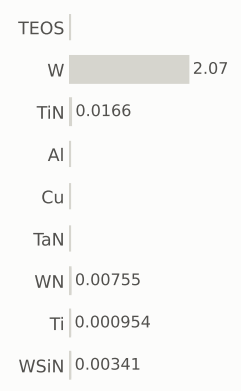

gases emitted (g)

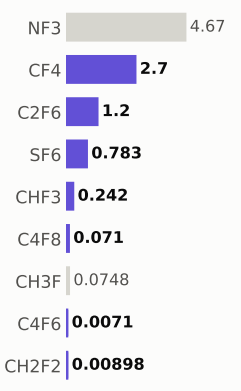

Step #5375.8: HAR_etch

etch_noop · HAR_etch

1.04	474.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

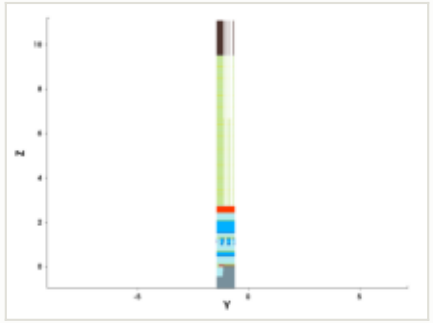

y cut at -1.035 µm

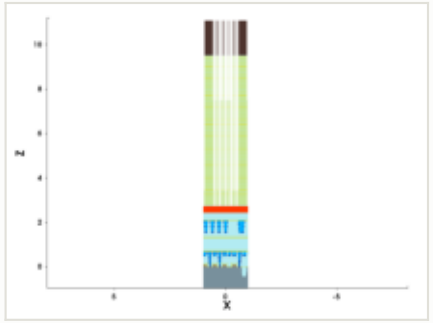

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

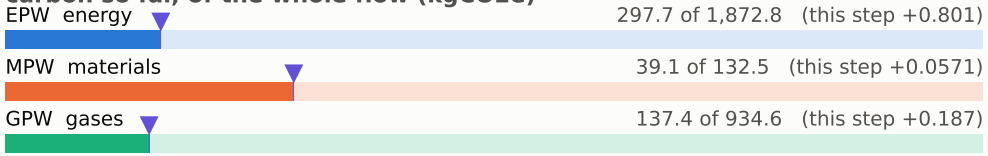

embodied carbon up to each step (kgCO2e per wafer)

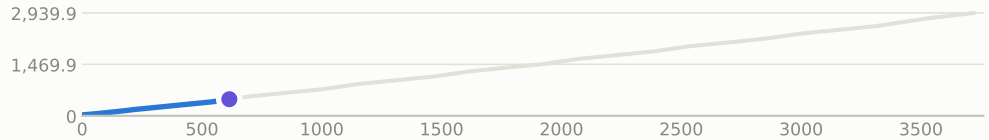

steps by process area

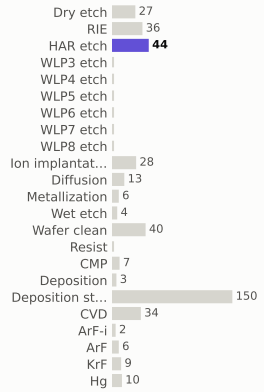

materials deposited (g)

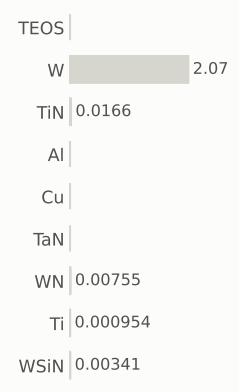

gases emitted (g)

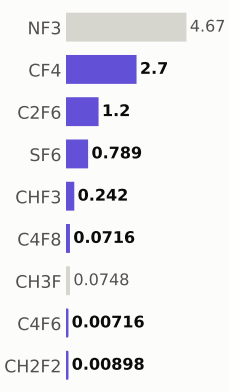

Step #5375.8667: HAR_etch

etch_noop · HAR_etch

1.04	475.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

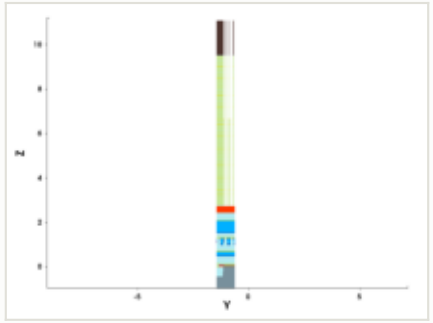

y cut at -1.035 µm

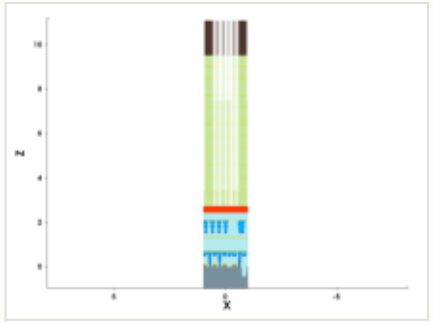

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

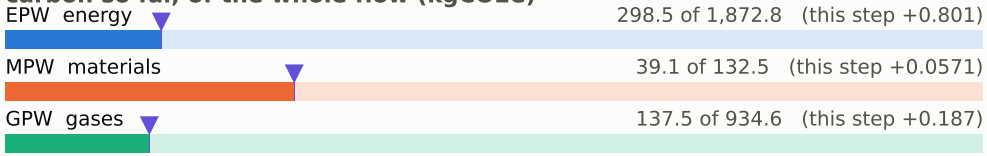

embodied carbon up to each step (kgCO2e per wafer)

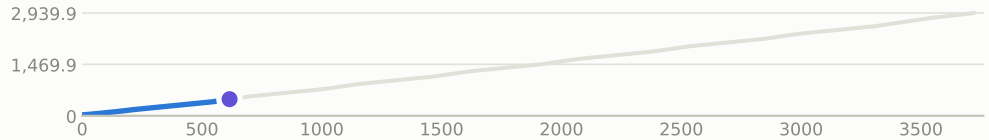

steps by process area

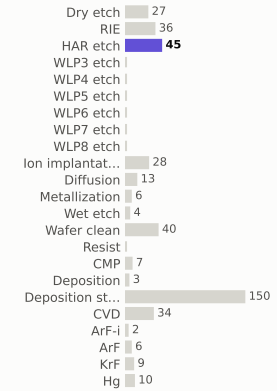

materials deposited (g)

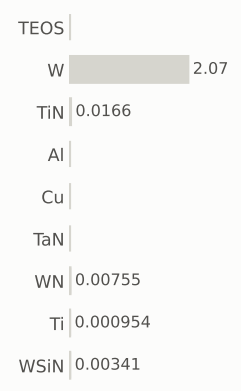

gases emitted (g)

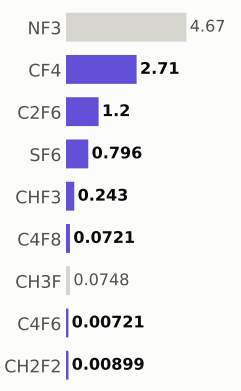

Step #5375.9333: HAR_etch

etch_noop · HAR_etch

1.04	476.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

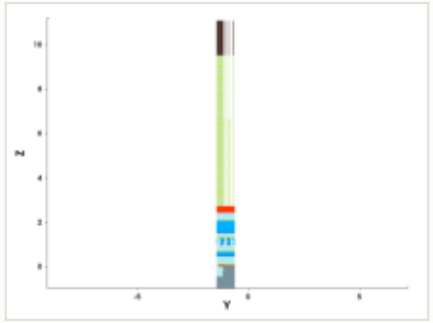

y cut at -1.035 µm

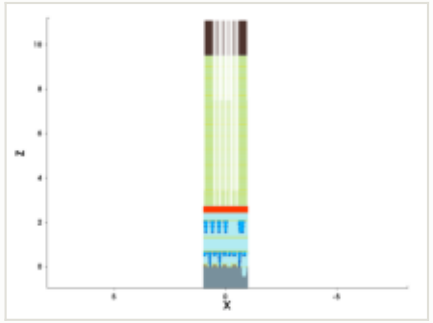

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

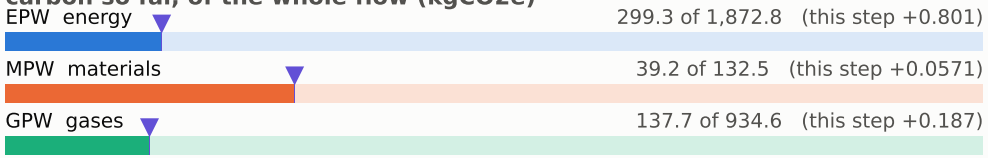

embodied carbon up to each step (kgCO2e per wafer)

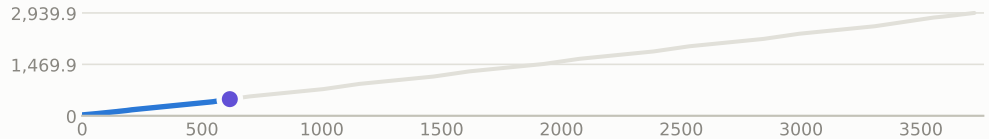

steps by process area

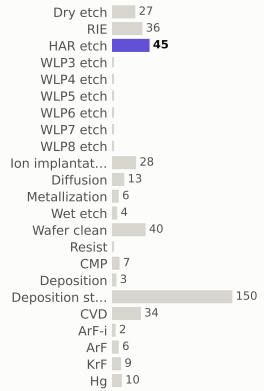

materials deposited (g)

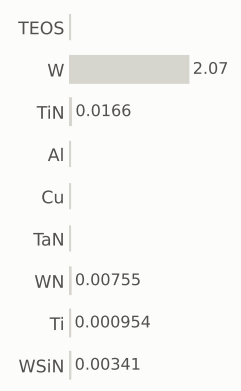

gases emitted (g)

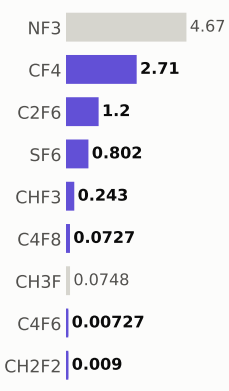

Step #5376: HAR_etch

etch_noop · HAR_etch

1.04	477.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

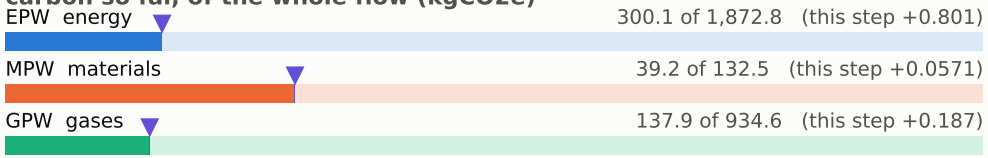

embodied carbon up to each step (kgCO2e per wafer)

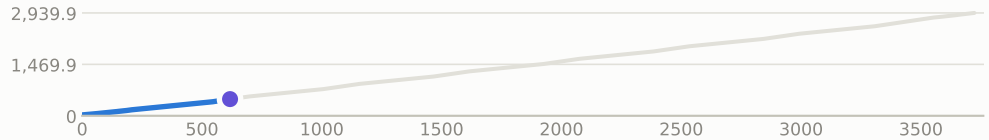

x cut at 0.000 µm

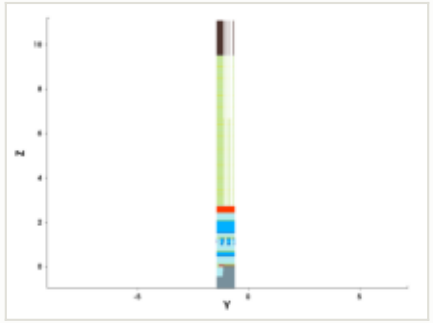

y cut at -1.035 µm

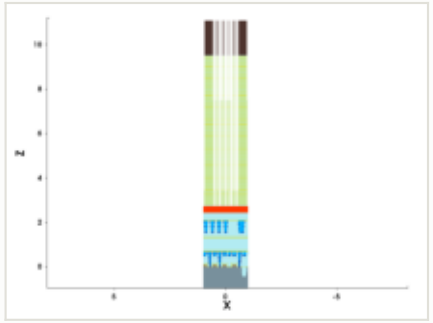

mask for this step

no mask for this step

steps by process area

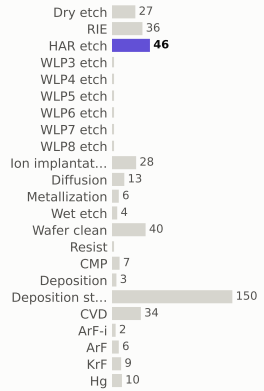

materials deposited (g)

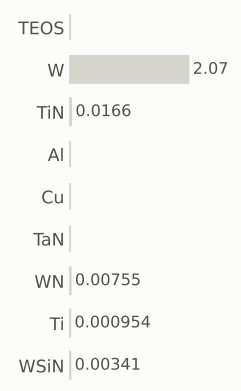

gases emitted (g)

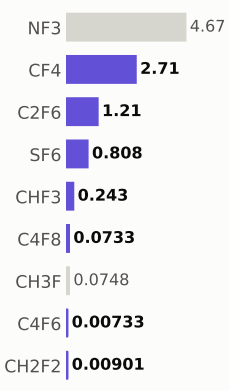

Step #5376.0667: HAR_etch

etch_noop · HAR_etch

1.04	478.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

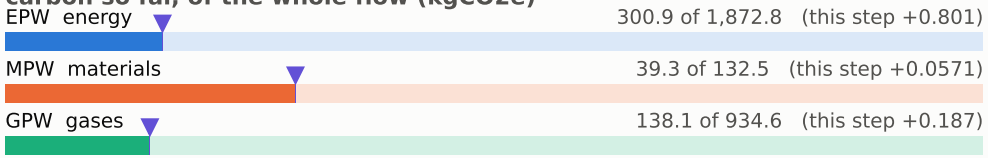

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

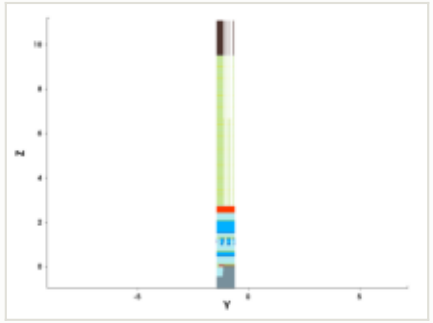

y cut at -1.035 µm

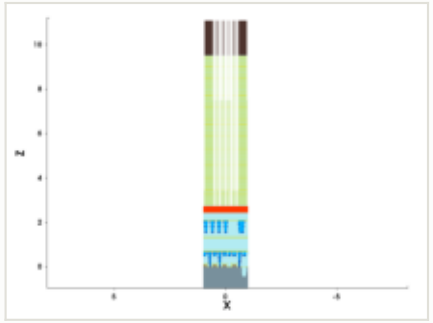

mask for this step

no mask for this step

steps by process area

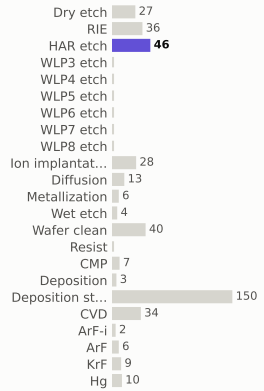

materials deposited (g)

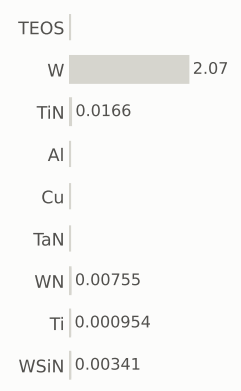

gases emitted (g)



Step #5376.1333: HAR_etch

etch_noop · HAR_etch

1.04	479.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

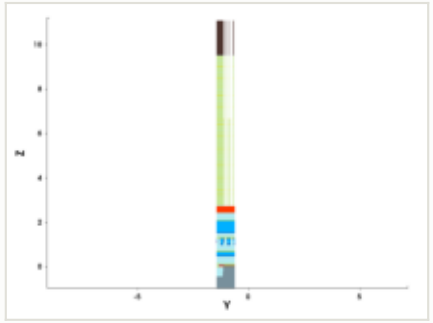

y cut at -1.035 µm

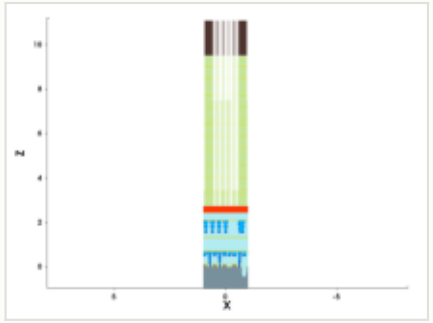

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

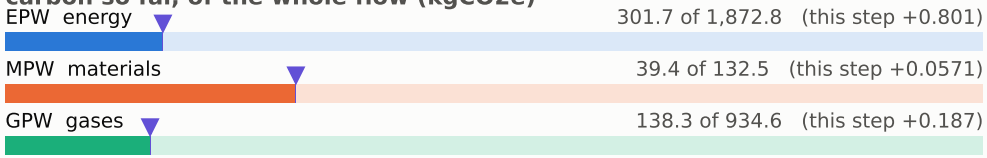

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

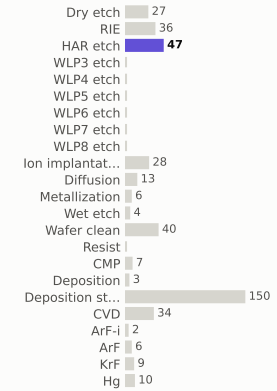

materials deposited (g)

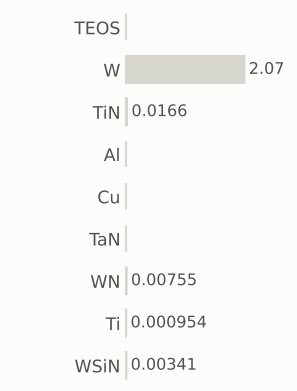

gases emitted (g)

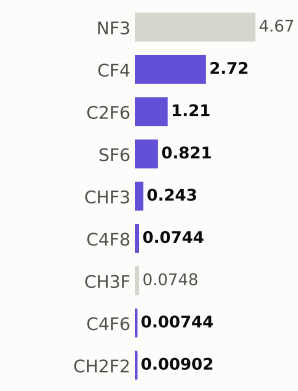

Step #5376.2: HAR_etch

etch_noop · HAR_etch

1.04	480.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

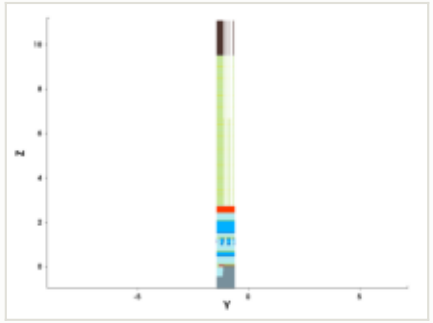

y cut at -1.035 µm

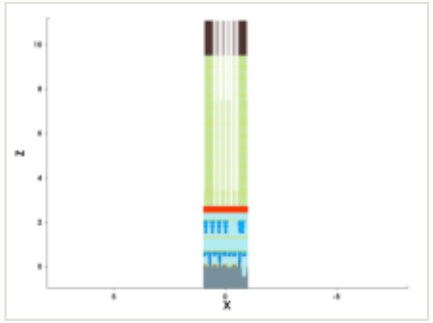

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

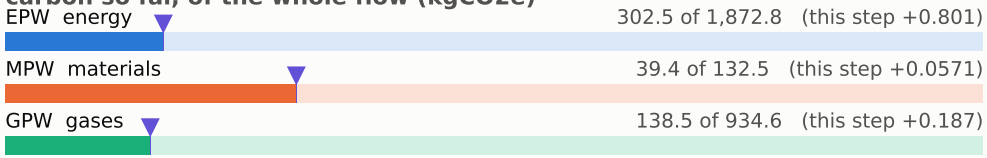

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

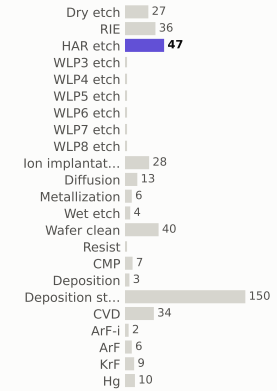

materials deposited (g)

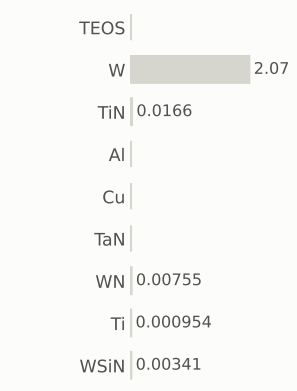

gases emitted (g)

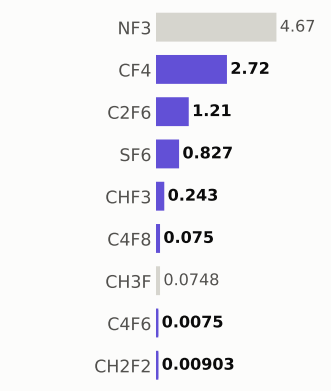

Step #5376.2667: HAR_etch

etch_noop · HAR_etch

1.04	481.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

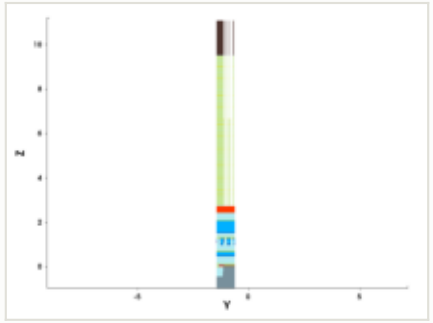

y cut at -1.035 µm

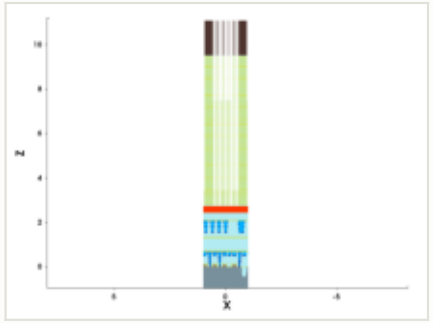

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

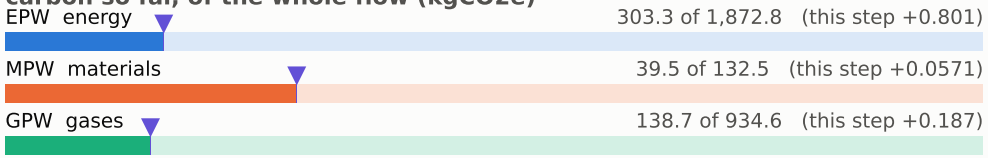

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

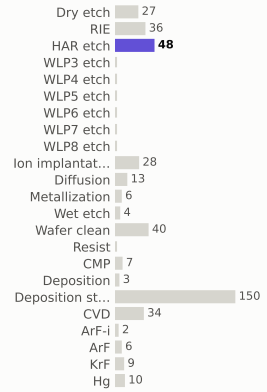

materials deposited (g)

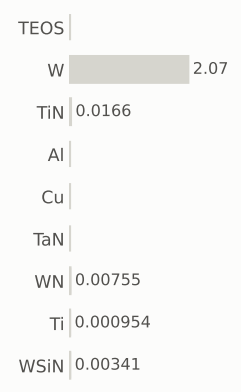

gases emitted (g)

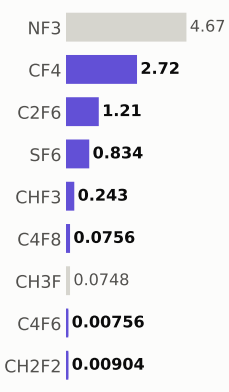

Step #5376.3333: HAR_etch

etch_noop · HAR_etch

1.04	482.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

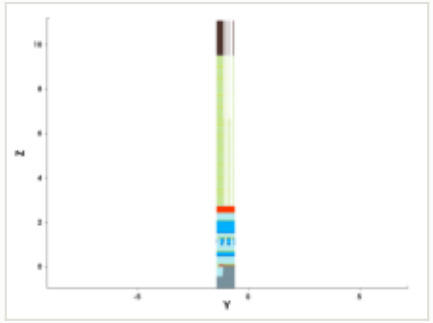

y cut at -1.035 µm

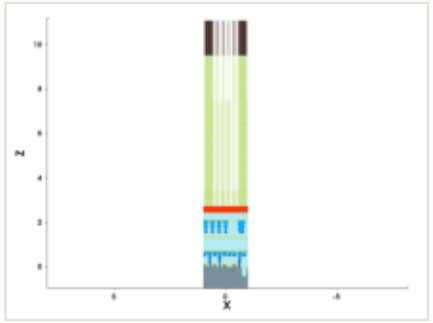

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

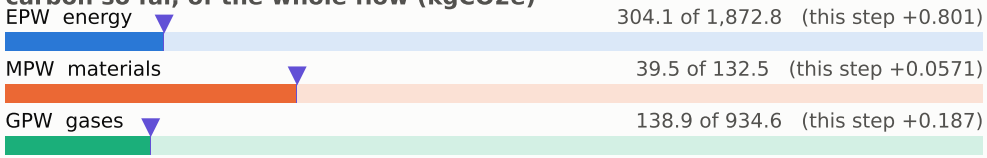

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

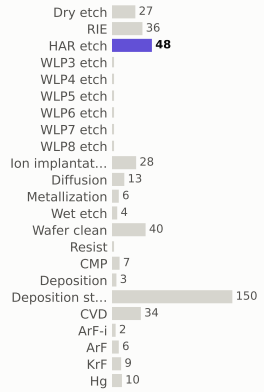

materials deposited (g)

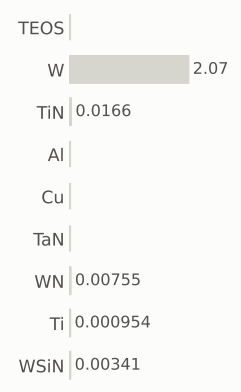

gases emitted (g)

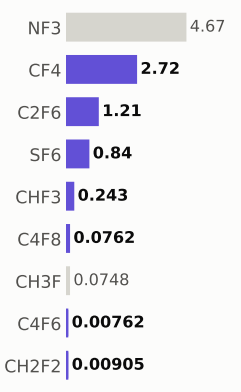

Step #5376.4: HAR_etch

etch_noop · HAR_etch

1.04	483.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

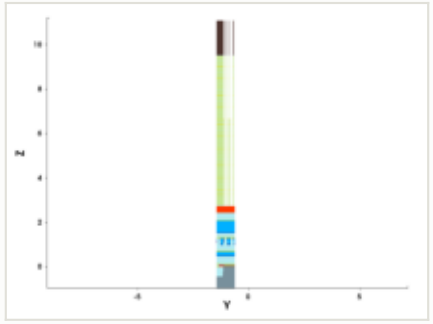

y cut at -1.035 µm

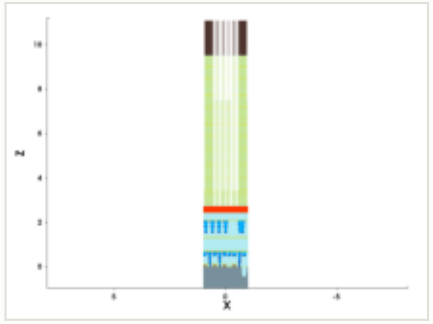

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

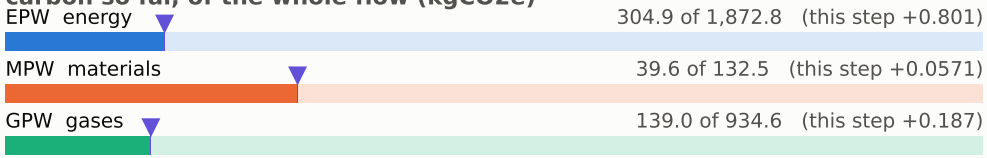

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

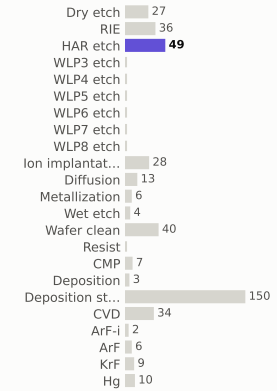

materials deposited (g)

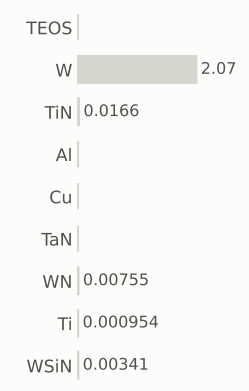

gases emitted (g)

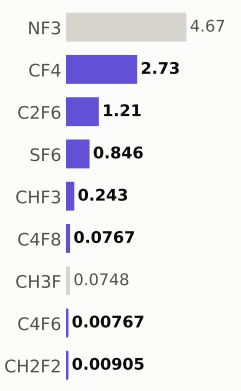

Step #5376.4667: HAR_etch

etch_noop · HAR_etch

1.04	484.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

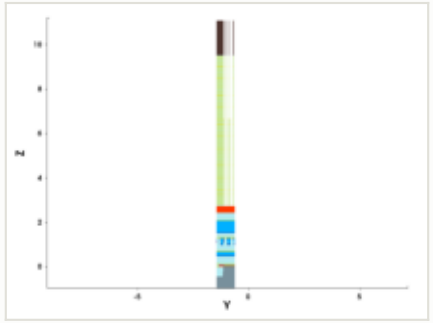

y cut at -1.035 µm

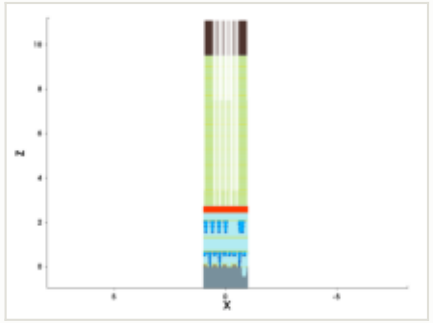

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

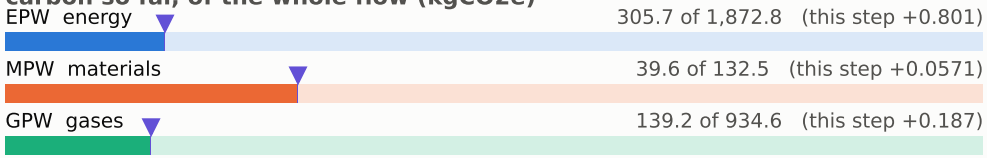

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

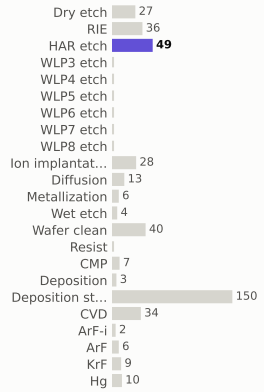

materials deposited (g)

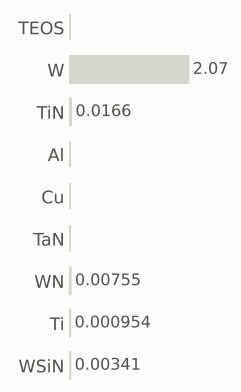

gases emitted (g)

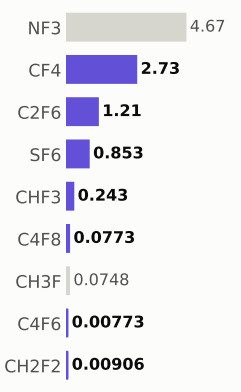

Step #5376.5333: HAR_etch

etch_noop · HAR_etch

1.04	485.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

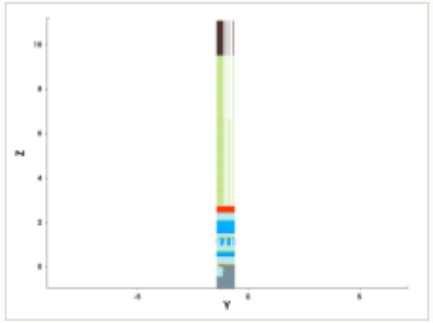

y cut at -1.035 µm

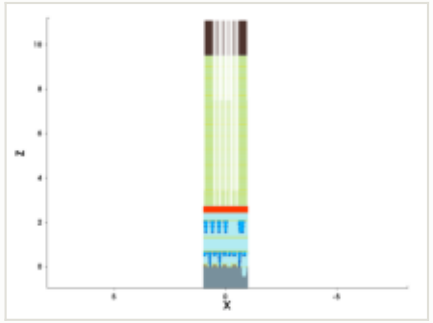

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

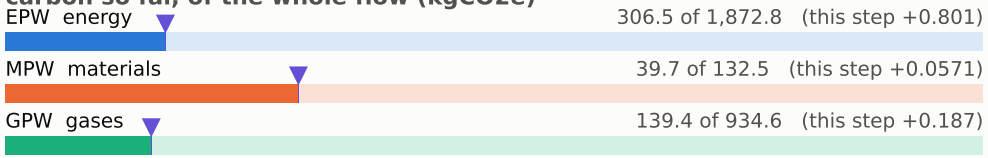

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

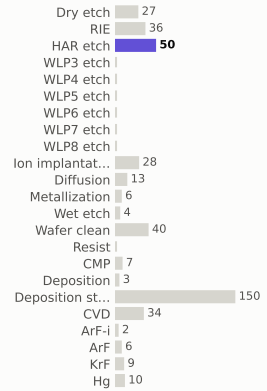

materials deposited (g)

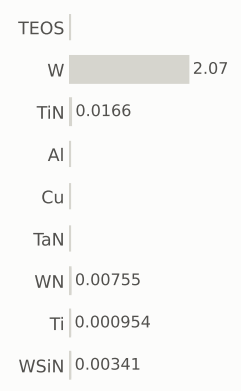

gases emitted (g)

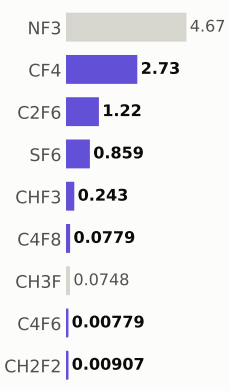

Step #5376.6: HAR_etch

etch_noop · HAR_etch

1.04	486.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

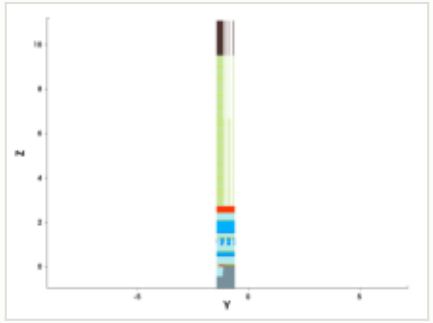

y cut at -1.035 µm

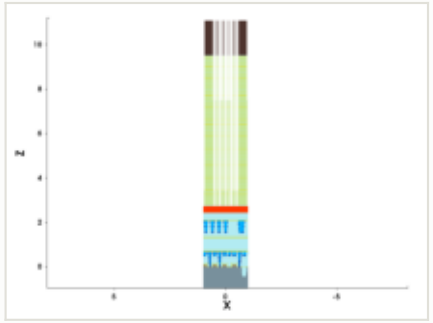

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

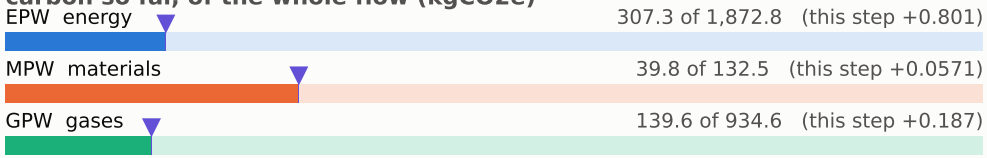

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

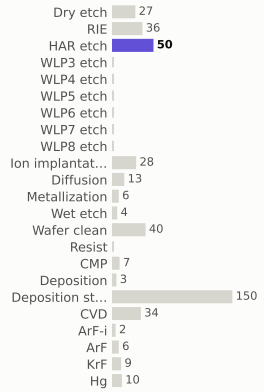

materials deposited (g)

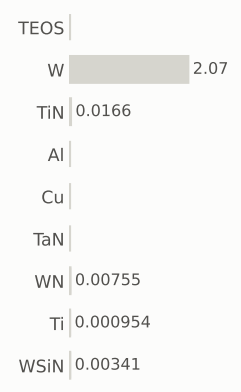

gases emitted (g)

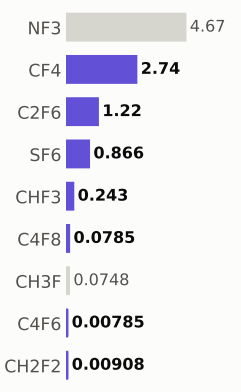

Step #5376.6667: HAR_etch

etch_noop · HAR_etch

1.04	487.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

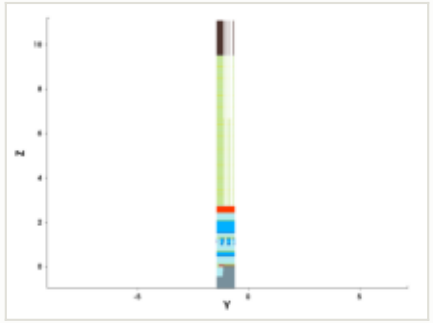

y cut at -1.035 µm

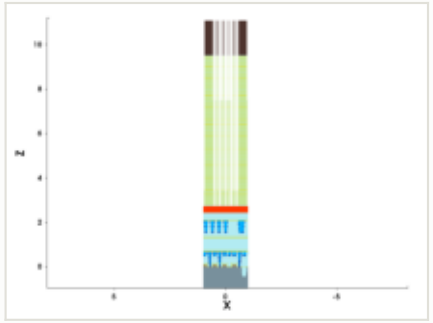

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

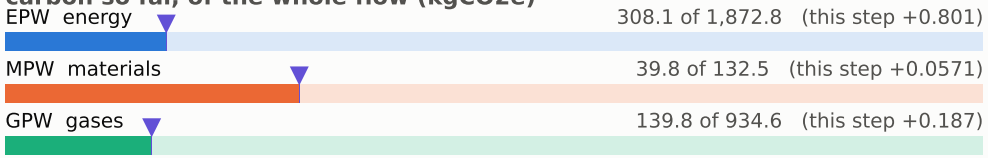

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

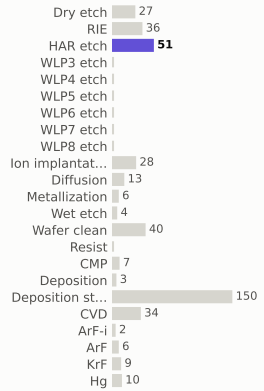

materials deposited (g)

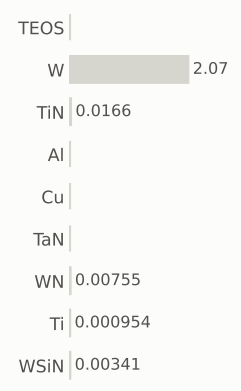

gases emitted (g)

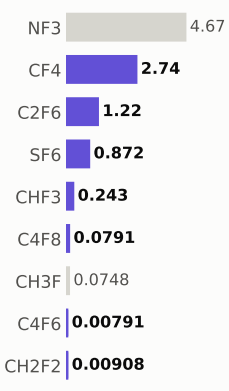

Step #5376.7333: HAR_etch

etch_noop · HAR_etch

1.04	488.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

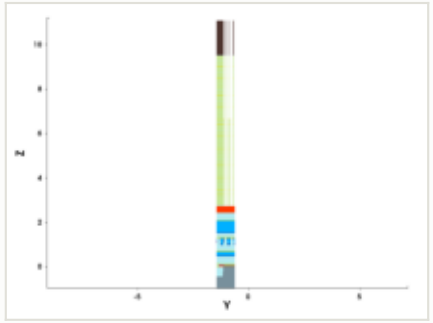

y cut at -1.035 µm

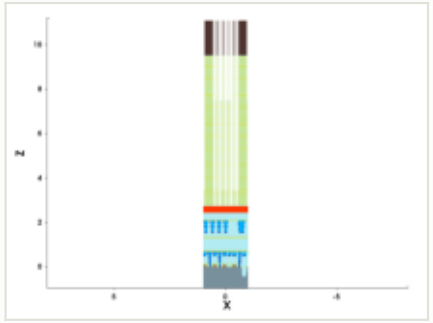

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

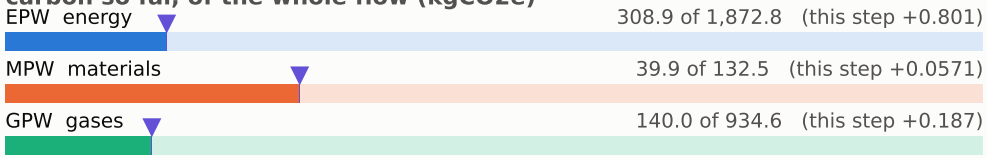

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

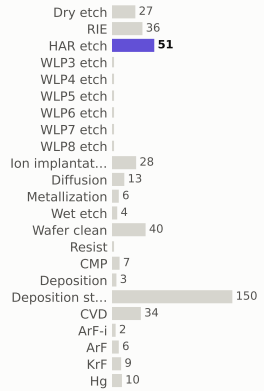

materials deposited (g)

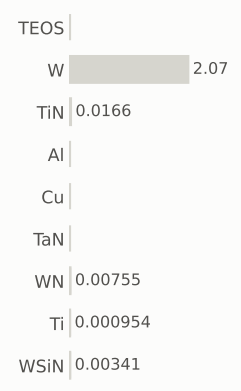

gases emitted (g)

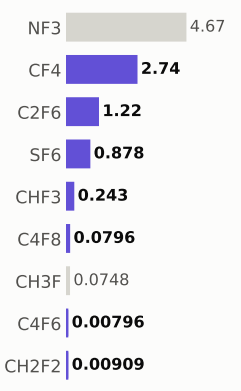

Step #5376.8: HAR_etch

etch_noop · HAR_etch

1.04	489.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

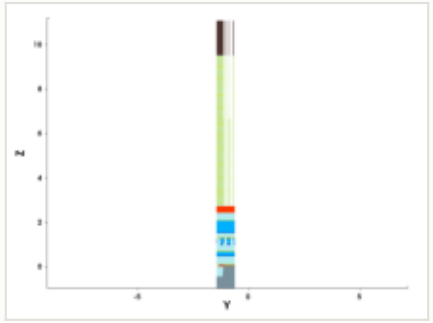

y cut at -1.035 µm

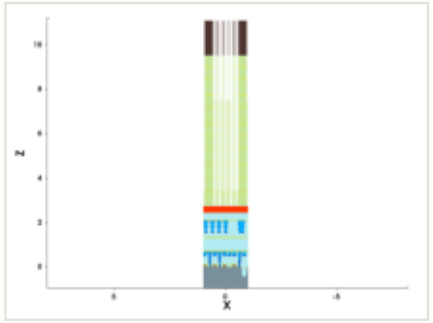

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

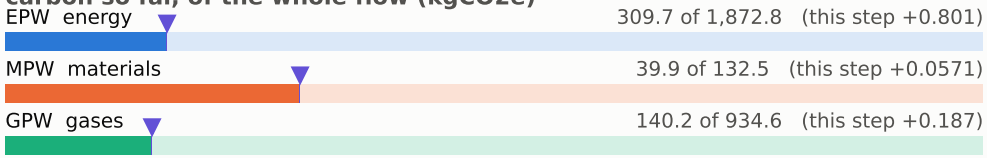

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

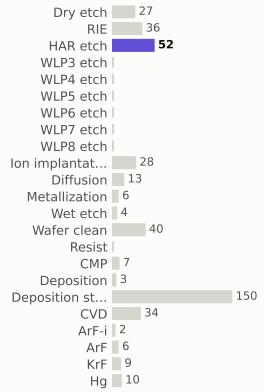

materials deposited (g)

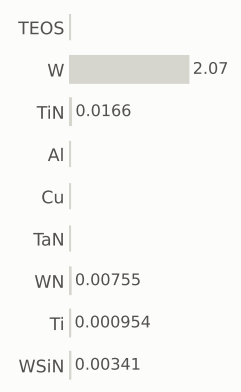

gases emitted (g)

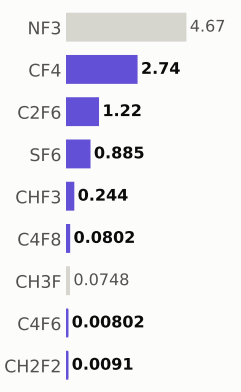

Step #5376.8667: HAR_etch

etch_noop · HAR_etch

1.04	490.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

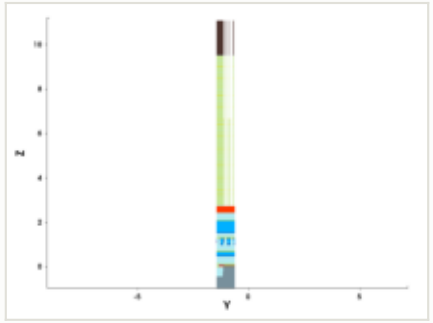

y cut at -1.035 µm

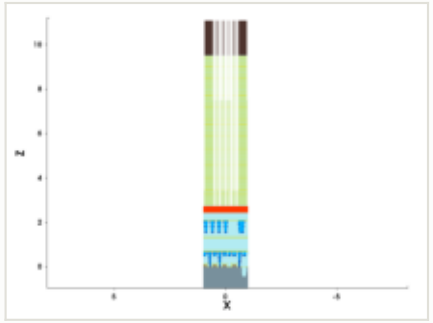

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

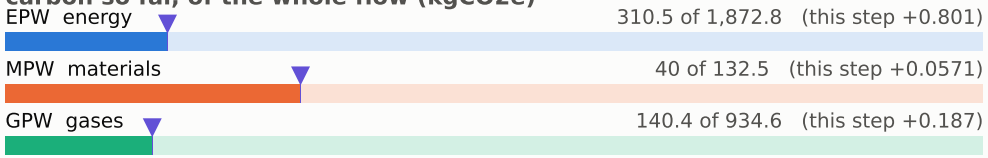

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

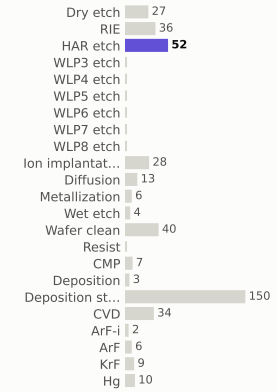

materials deposited (g)

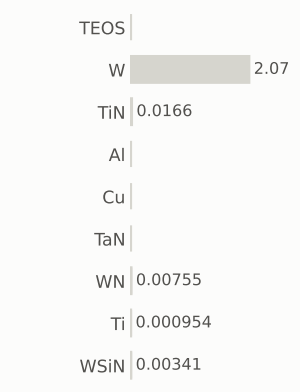

gases emitted (g)

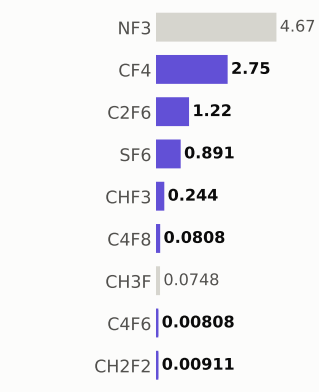

Step #5376.9333: HAR_etch

etch_noop · HAR_etch

1.04	491.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

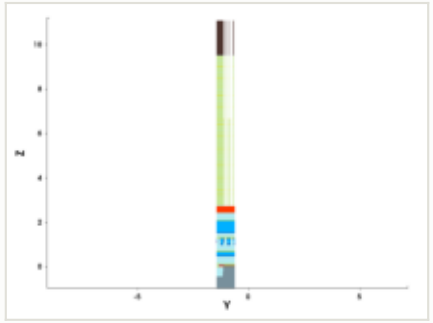

y cut at -1.035 µm

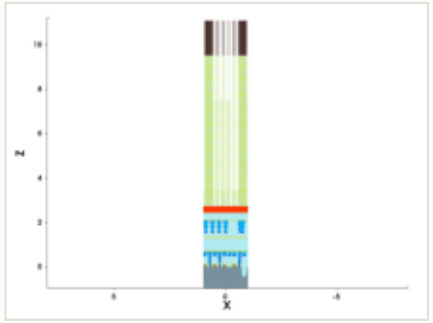

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

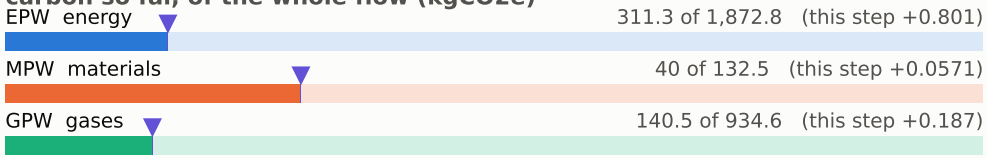

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

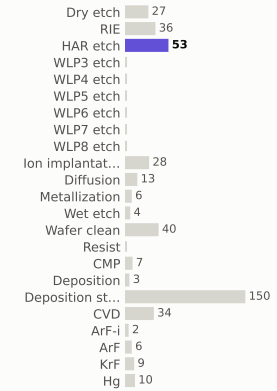

materials deposited (g)

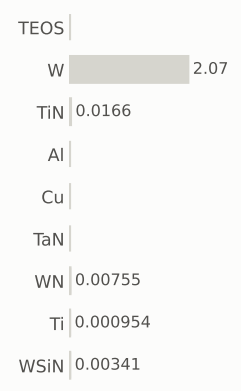

gases emitted (g)

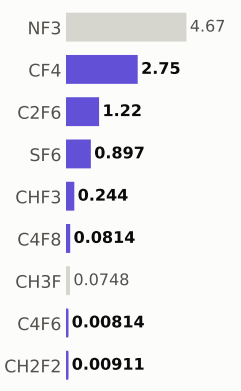

Step #5377: HAR_etch

etch_noop · HAR_etch

1.04	492.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

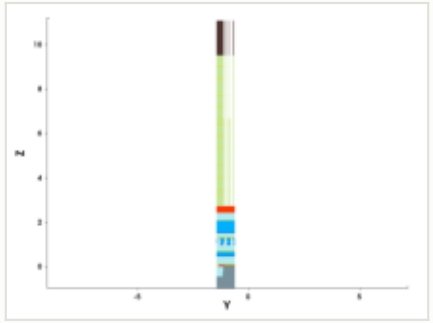

y cut at -1.035 µm

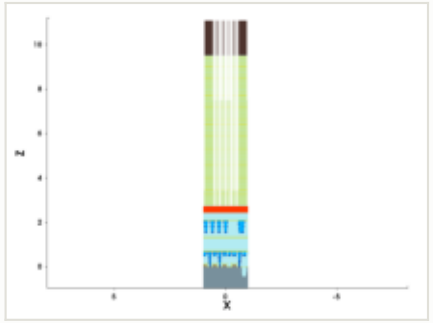

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

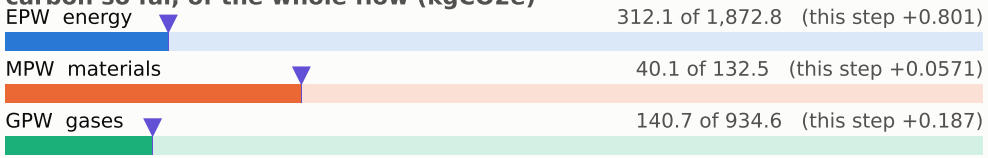

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

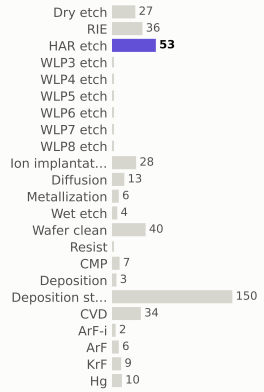

materials deposited (g)

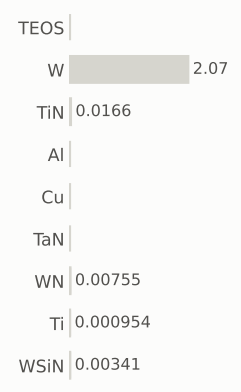

gases emitted (g)

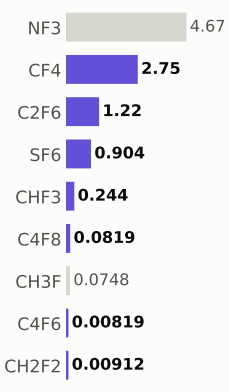

Step #5377.0667: HAR_etch

etch_noop · HAR_etch

1.04	493.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

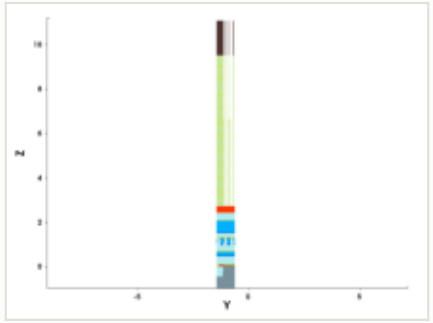

y cut at -1.035 µm

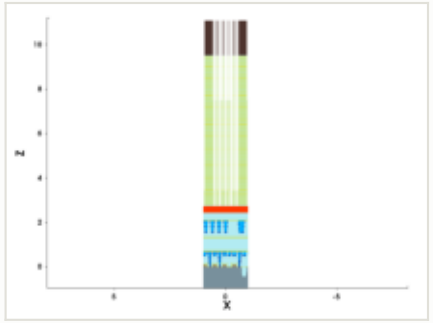

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

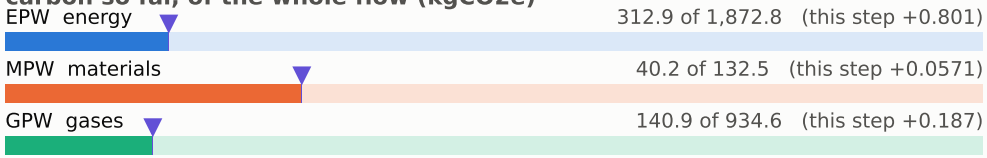

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

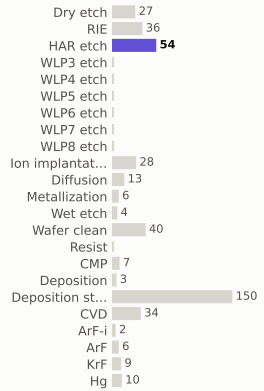

materials deposited (g)

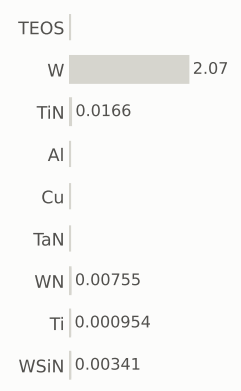

gases emitted (g)

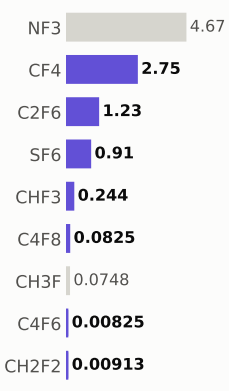

Step #5377.1333: HAR_etch

etch_noop · HAR_etch

1.04	495.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

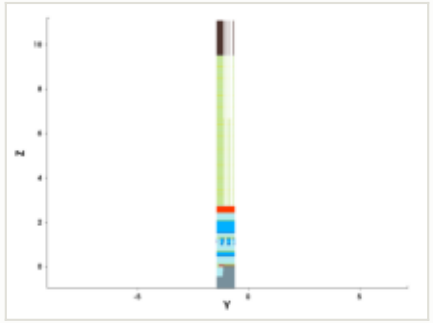

y cut at -1.035 µm

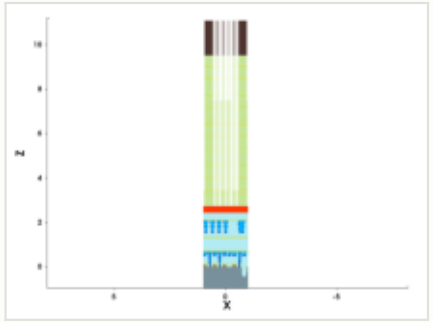

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

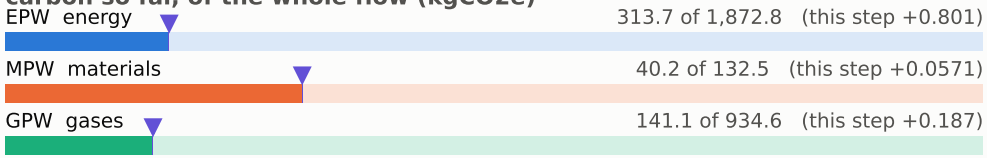

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

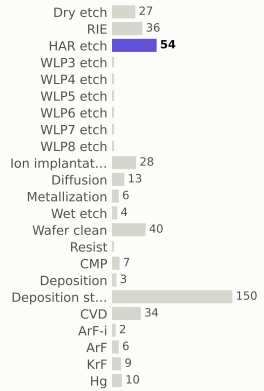

materials deposited (g)

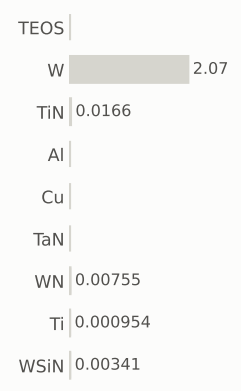

gases emitted (g)

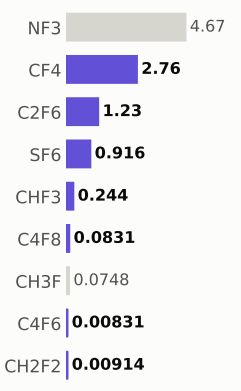

Step #5377.2: HAR_etch

etch_noop · HAR_etch

1.04	496.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

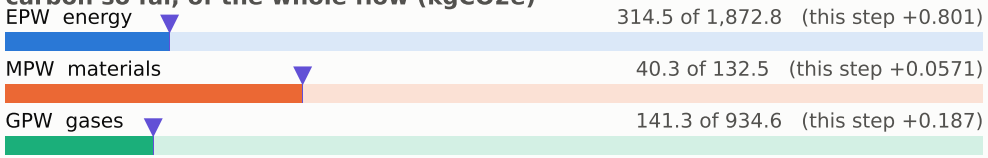

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

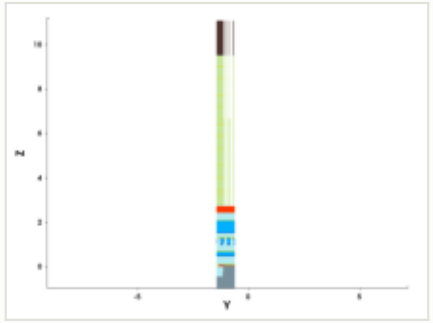

y cut at -1.035 µm

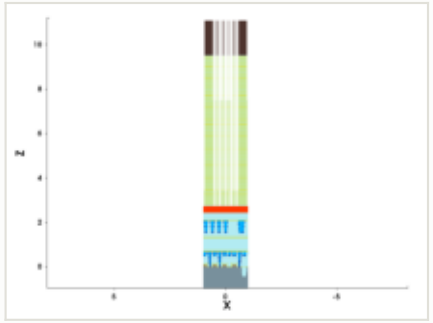

mask for this step

no mask for this step

steps by process area

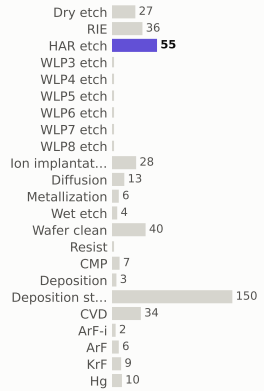

materials deposited (g)

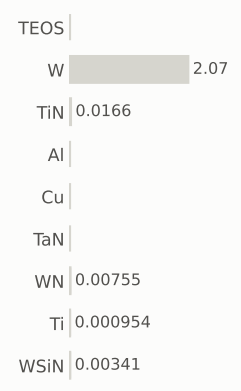

gases emitted (g)

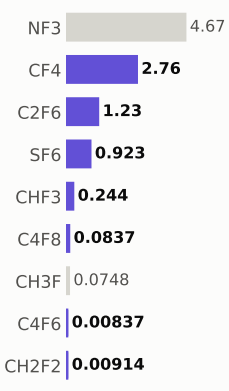

Step #5377.2667: HAR_etch

etch_noop · HAR_etch

1.04	497.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

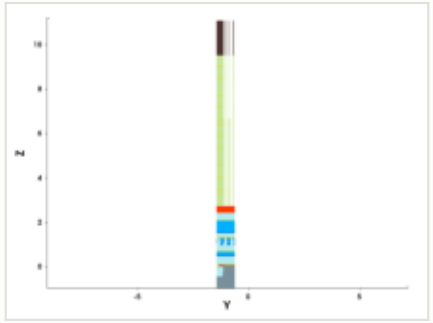

y cut at -1.035 µm

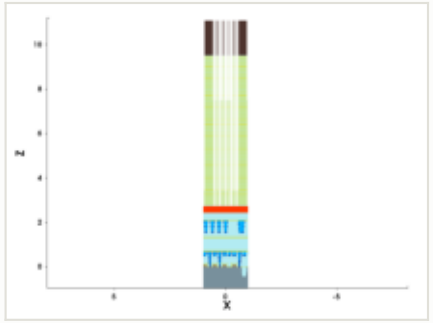

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

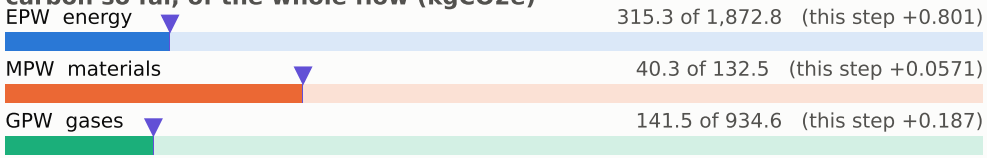

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

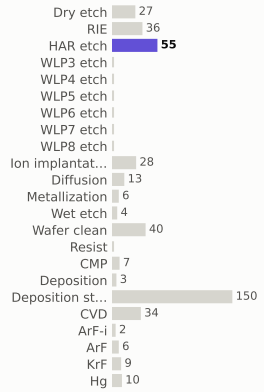

materials deposited (g)

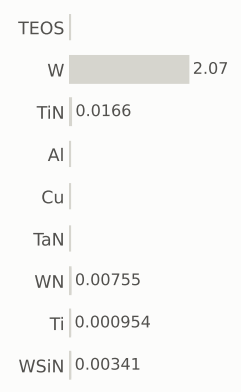

gases emitted (g)

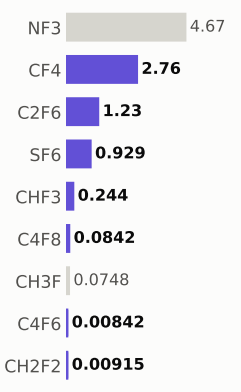

Step #5377.3333: HAR_etch

etch_noop · HAR_etch

1.04	498.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

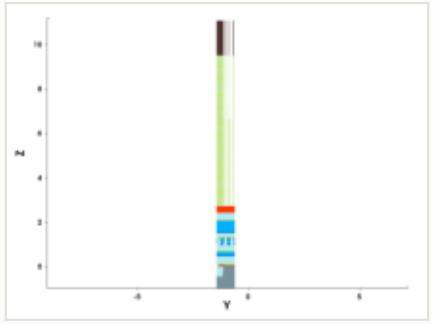

y cut at -1.035 µm

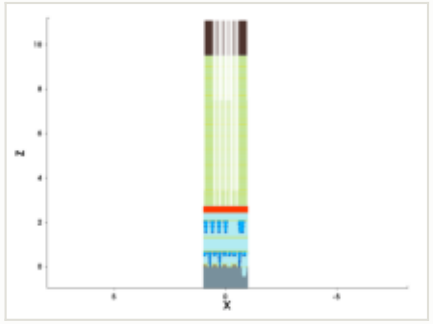

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

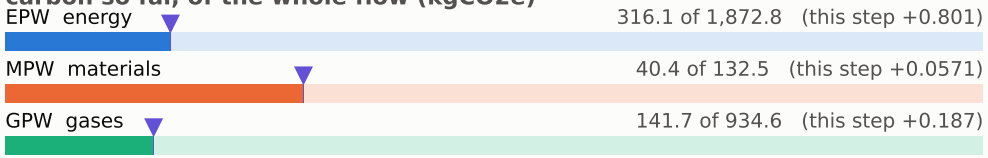

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

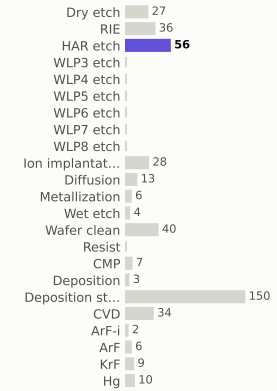

materials deposited (g)

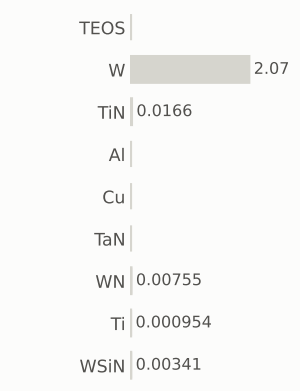

gases emitted (g)

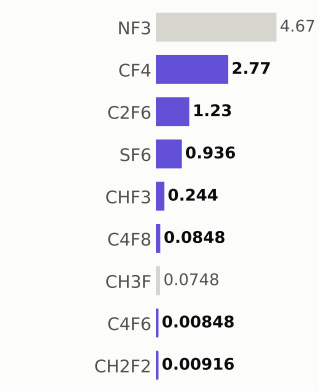

Step #5377.4: HAR_etch

etch_noop · HAR_etch

1.04	499.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

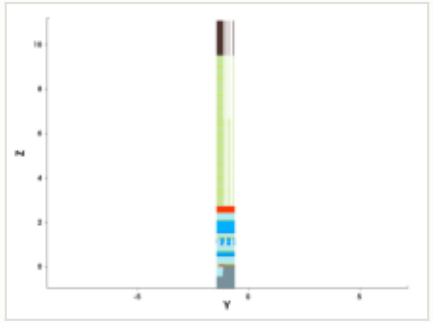

y cut at -1.035 µm

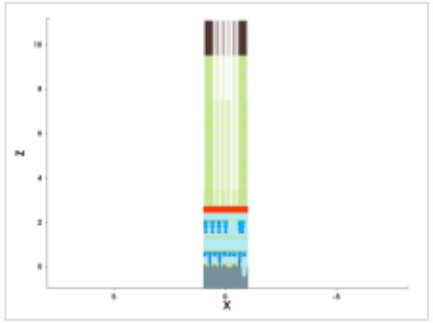

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

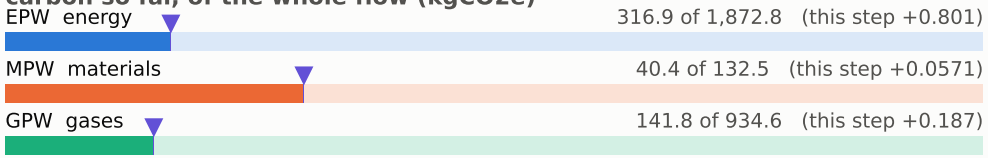

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

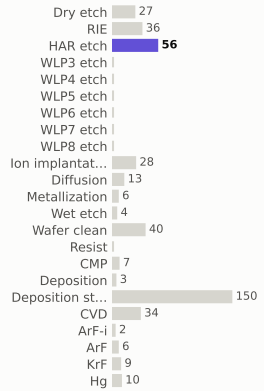

materials deposited (g)

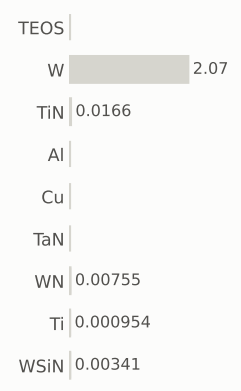

gases emitted (g)

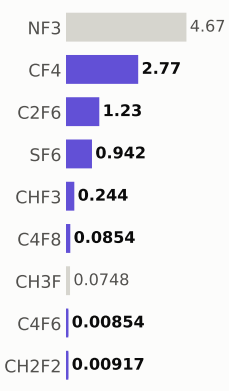

Step #5377.4667: HAR_etch

etch_noop · HAR_etch

1.04	500.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

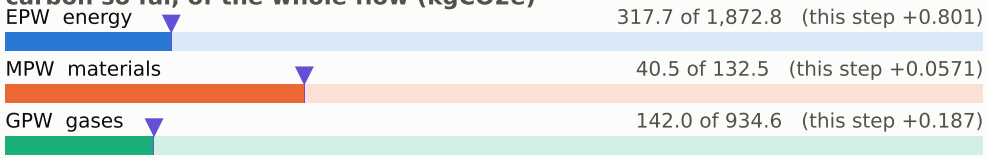

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

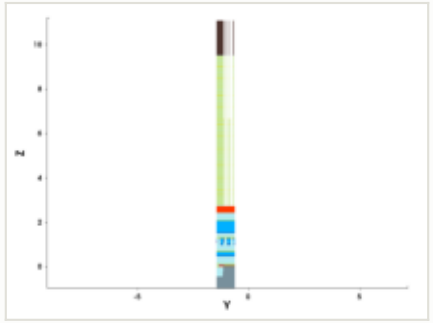

y cut at -1.035 µm

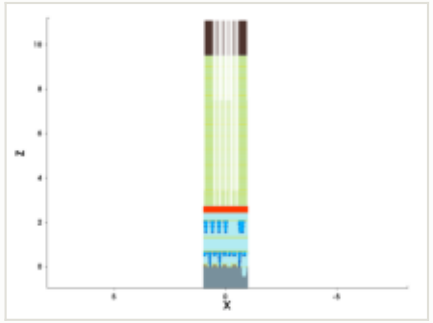

mask for this step

no mask for this step

steps by process area

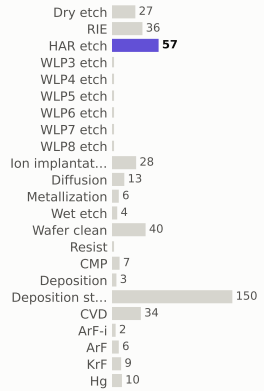

materials deposited (g)

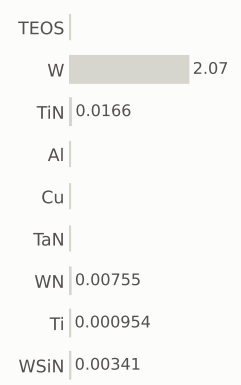

gases emitted (g)

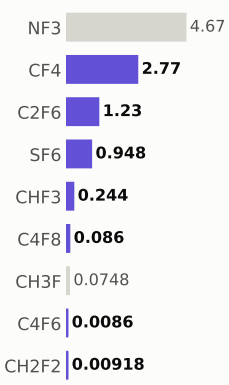

Step #5377.5333: HAR_etch

etch_noop · HAR_etch

1.04	501.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

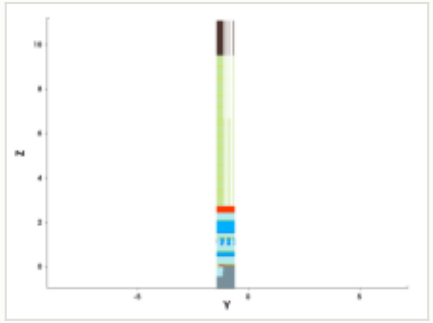

y cut at -1.035 µm

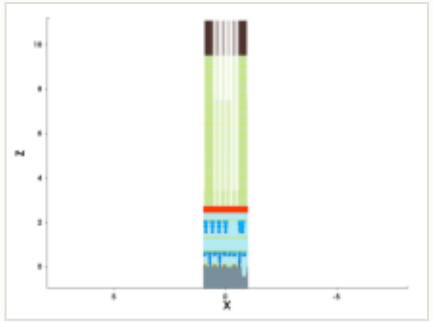

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

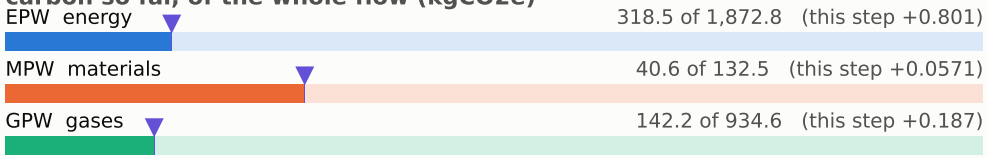

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

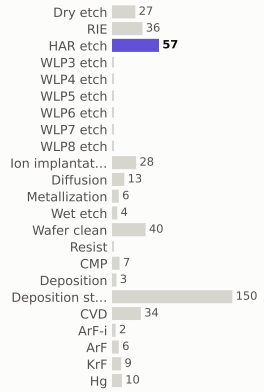

materials deposited (g)

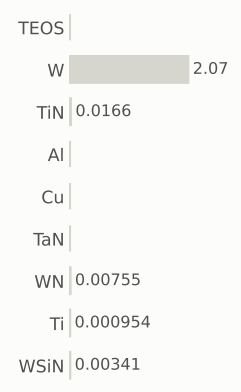

gases emitted (g)

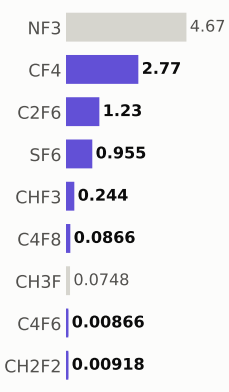

Step #5377.6: HAR_etch

etch_noop · HAR_etch

1.04	502.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

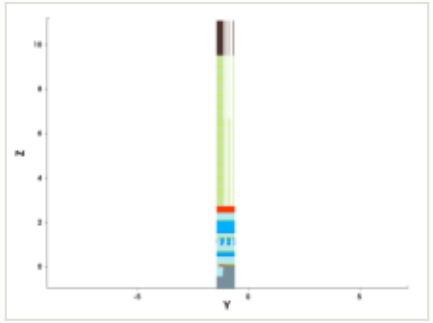

y cut at -1.035 µm

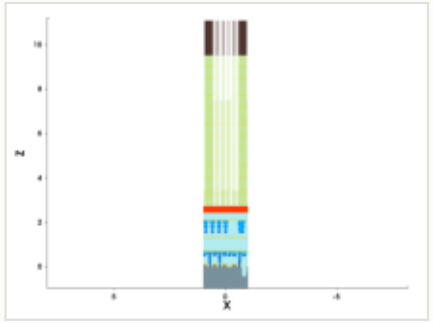

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

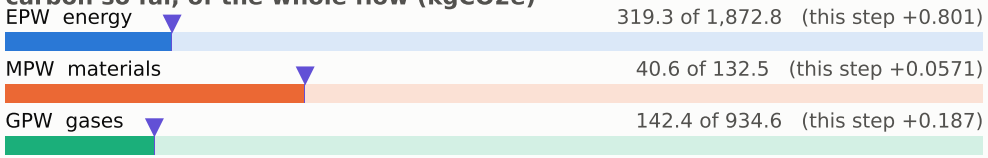

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

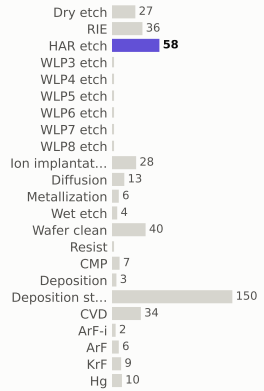

materials deposited (g)

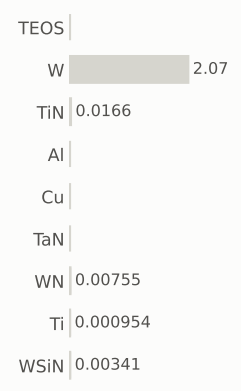

gases emitted (g)

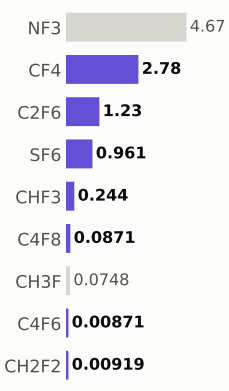

Step #5377.6667: HAR_etch

etch_noop · HAR_etch

1.04	503.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

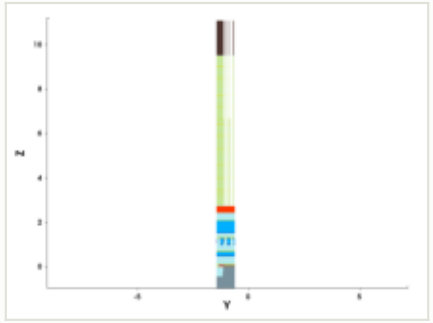

y cut at -1.035 µm

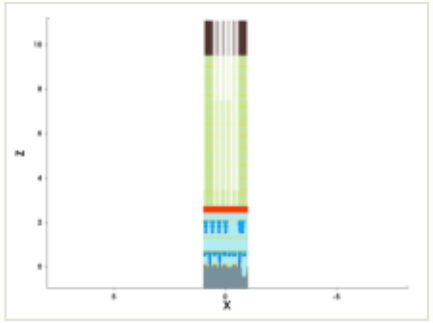

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

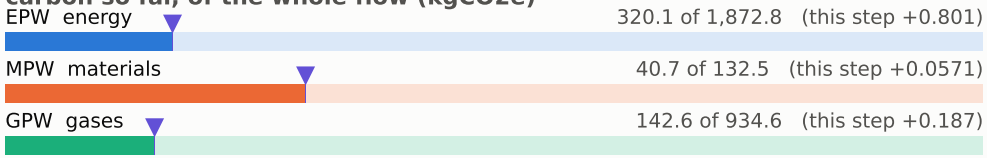

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

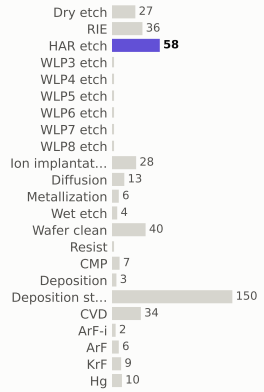

materials deposited (g)

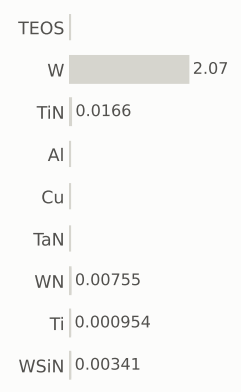

gases emitted (g)

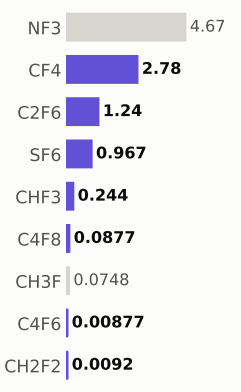

Step #5377.7333: HAR_etch

etch_noop · HAR_etch

1.04	504.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

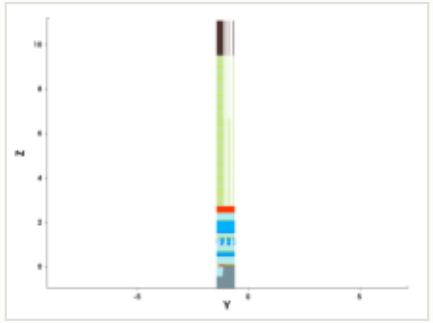

y cut at -1.035 µm

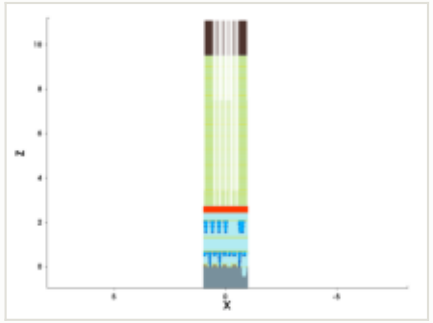

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

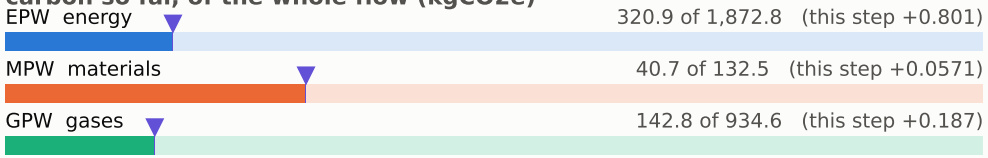

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

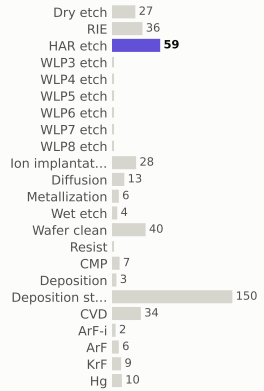

materials deposited (g)

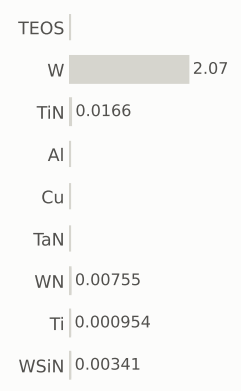

gases emitted (g)

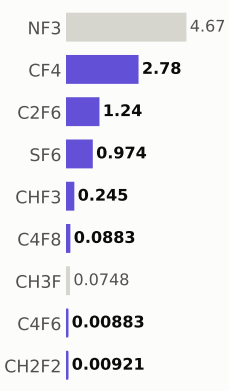

Step #5377.8: HAR_etch

etch_noop · HAR_etch

1.04	505.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

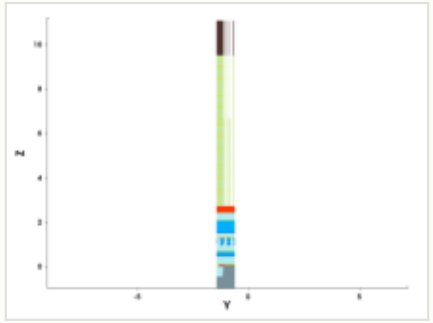

y cut at -1.035 µm

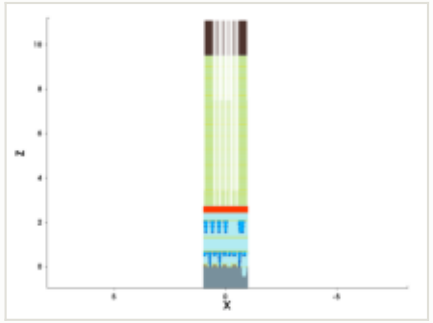

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

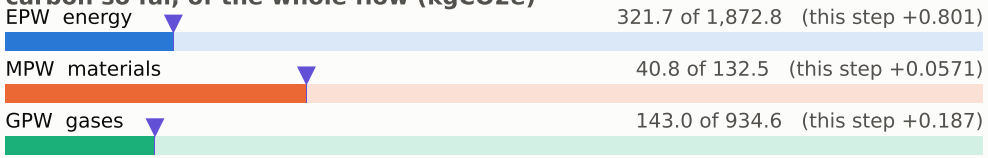

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

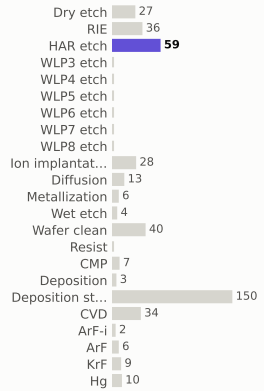

materials deposited (g)

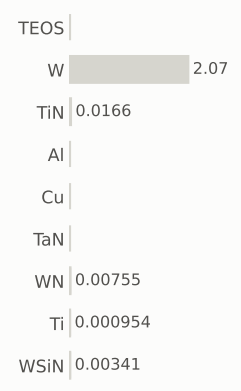

gases emitted (g)

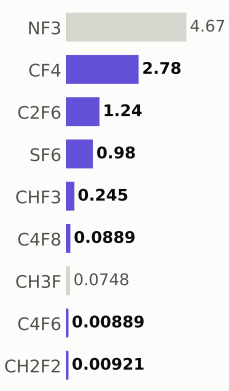

Step #5377.8667: HAR_etch

etch_noop · HAR_etch

1.04	506.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

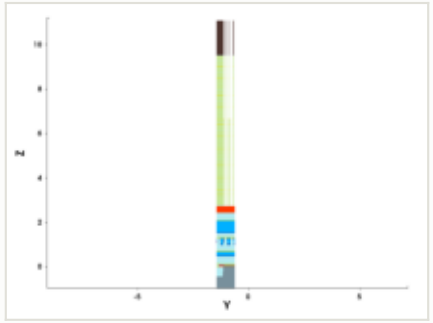

y cut at -1.035 µm

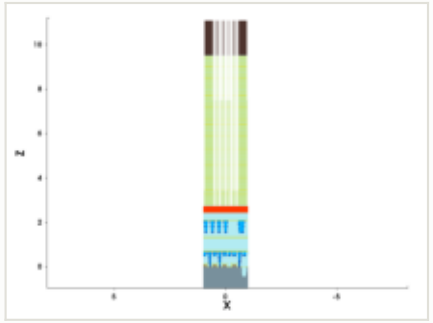

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

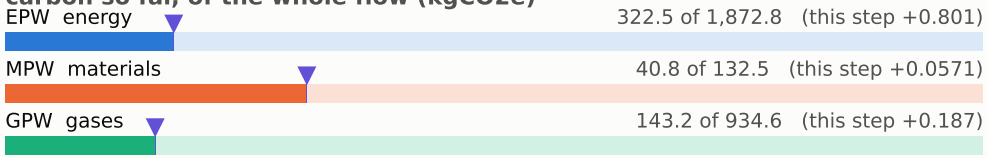

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

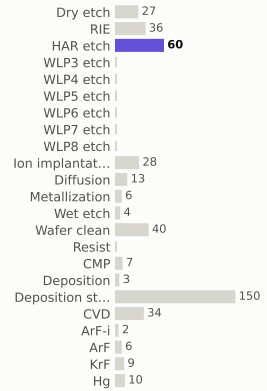

materials deposited (g)

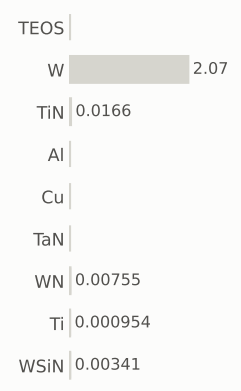

gases emitted (g)

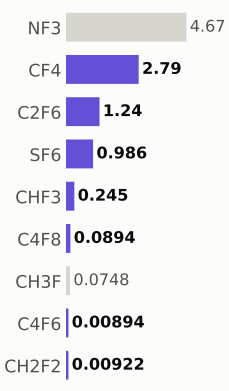

Step #5377.9333: HAR_etch

etch_noop · HAR_etch

1.04	507.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

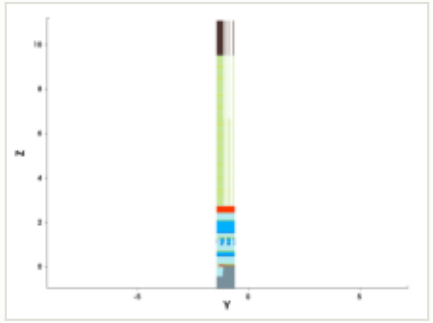

y cut at -1.035 µm

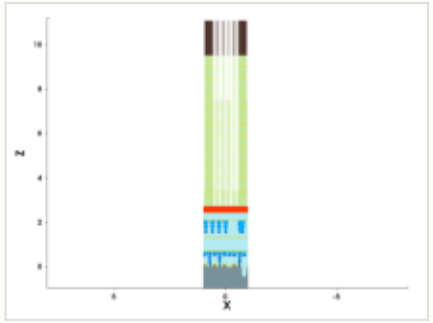

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

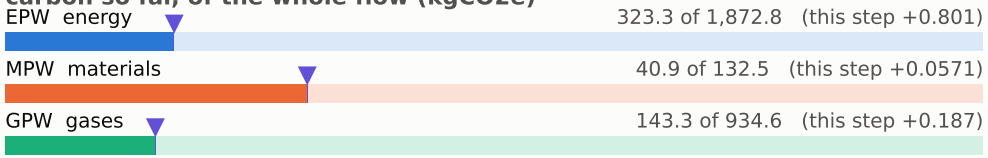

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

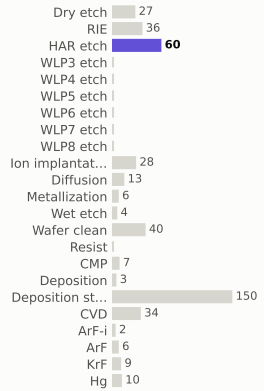

materials deposited (g)

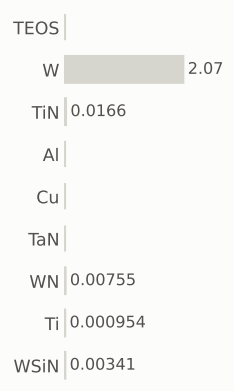

gases emitted (g)

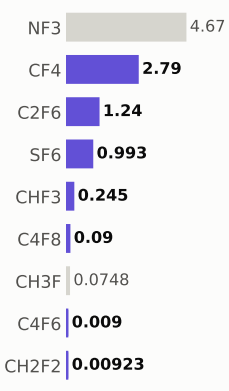

Step #5378: HAR_etch

etch_noop · HAR_etch

1.04	508.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

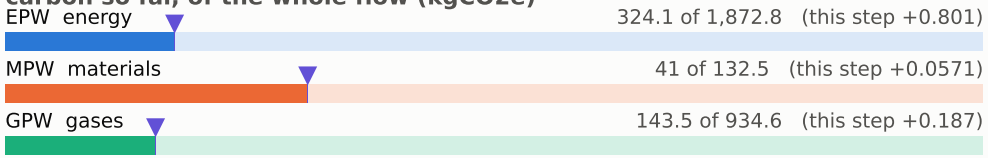

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

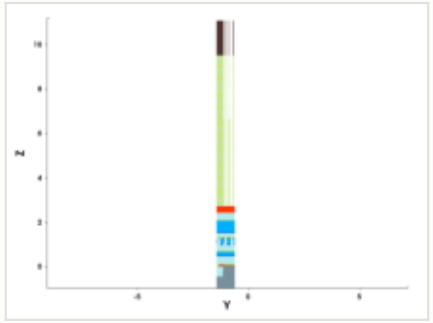

y cut at -1.035 µm

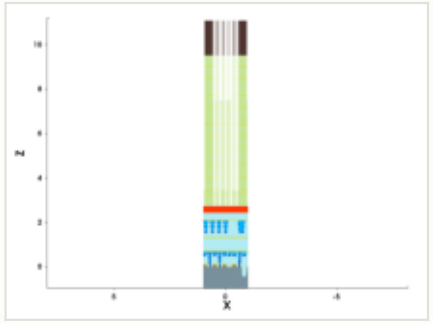

mask for this step

no mask for this step

steps by process area

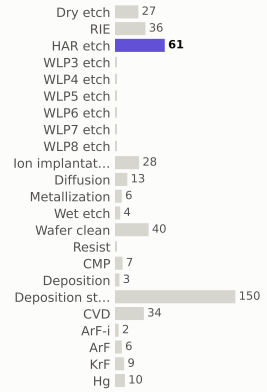

materials deposited (g)

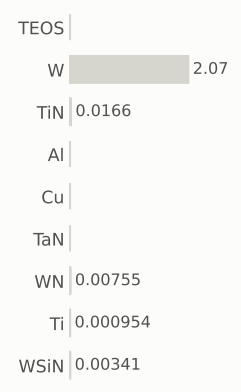

gases emitted (g)

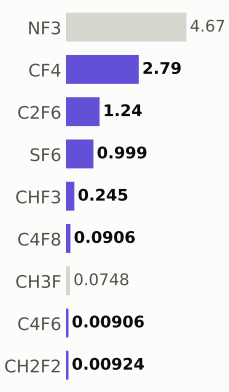

Step #5378.0667: HAR_etch

etch_noop · HAR_etch

1.04	509.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

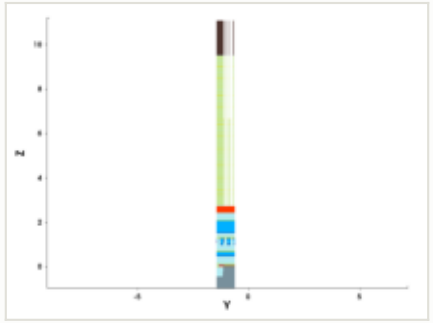

y cut at -1.035 µm

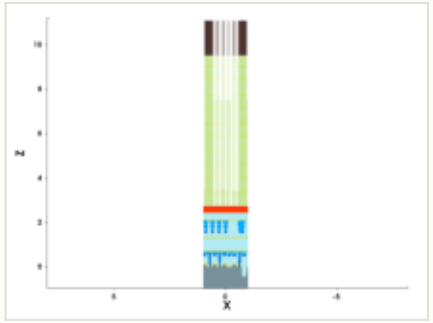

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

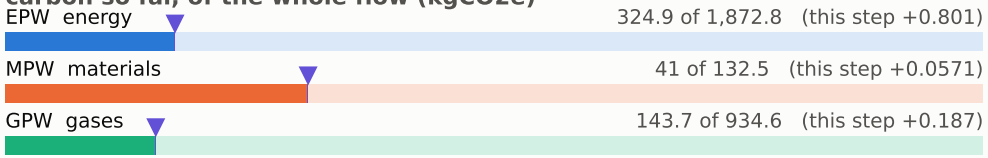

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

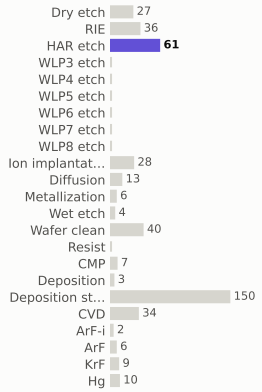

materials deposited (g)

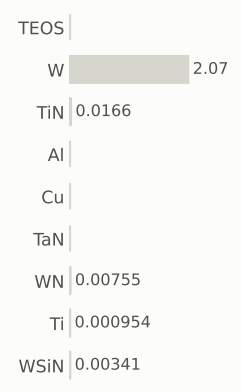

gases emitted (g)

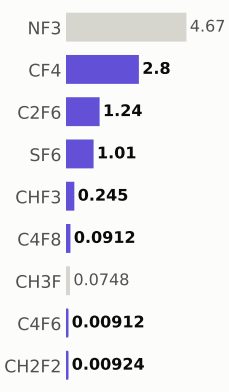

Step #5378.1333: HAR_etch

etch_noop · HAR_etch

1.04	510.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

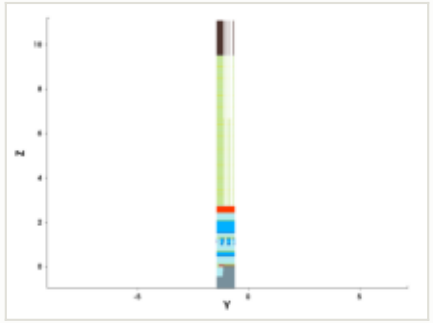

y cut at -1.035 µm

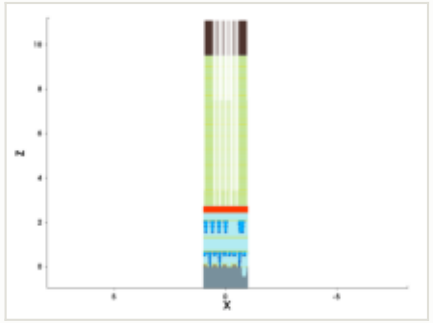

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

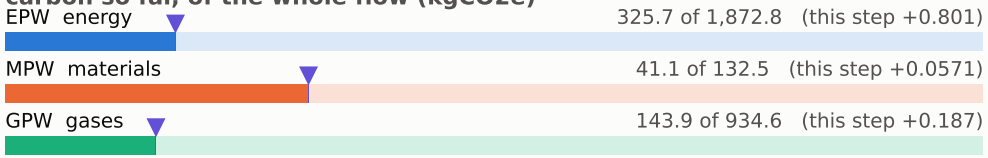

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

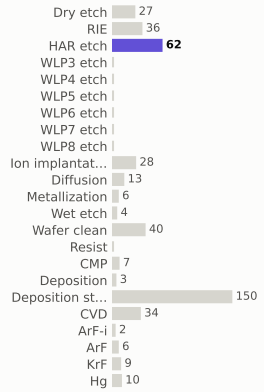

materials deposited (g)

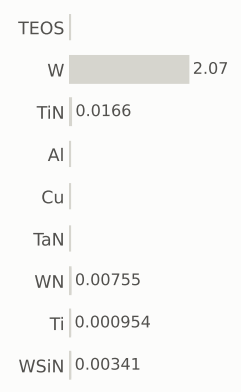

gases emitted (g)

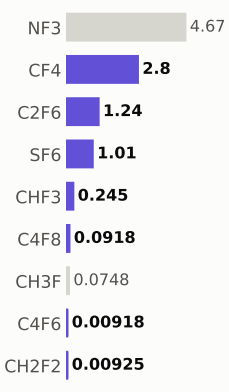

Step #5378.2: HAR_etch

etch_noop · HAR_etch

1.04	511.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

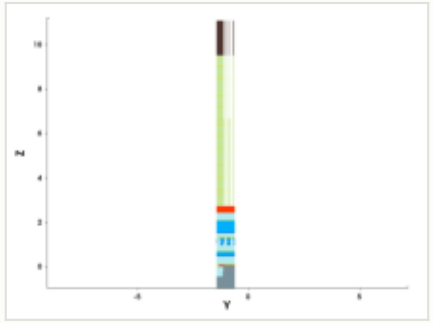

y cut at -1.035 µm

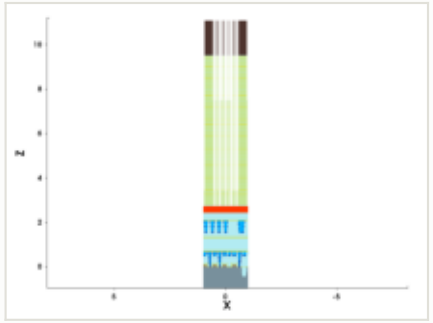

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

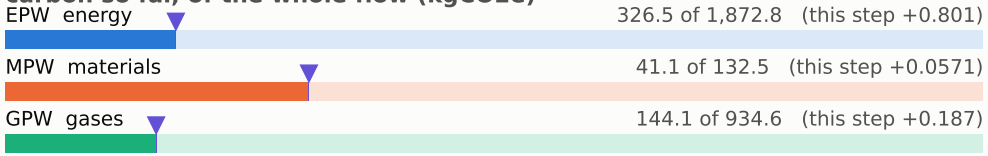

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

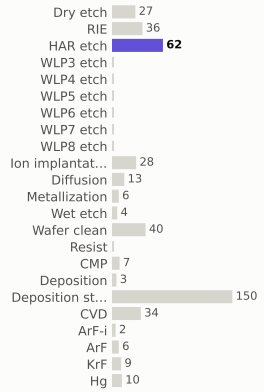

materials deposited (g)

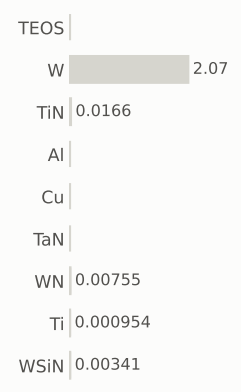

gases emitted (g)

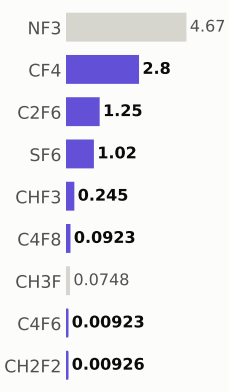

Step #5378.2667: HAR_etch

etch_noop · HAR_etch

1.04	512.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

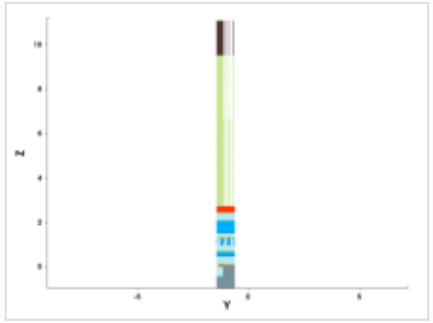

y cut at -1.035 µm

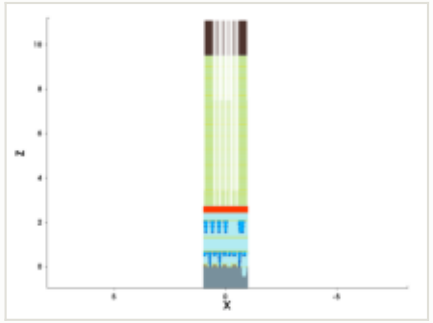

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

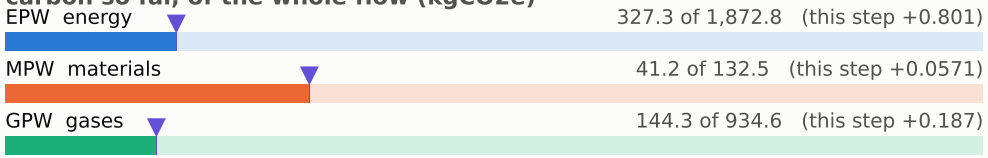

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

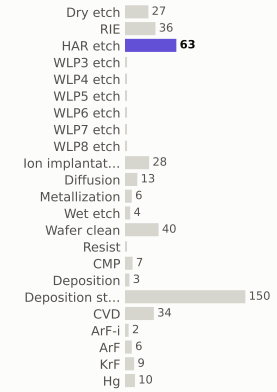

materials deposited (g)

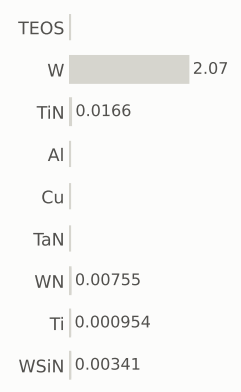

gases emitted (g)

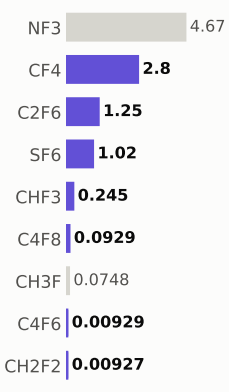

Step #5378.3333: HAR_etch

etch_noop · HAR_etch

1.04	513.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

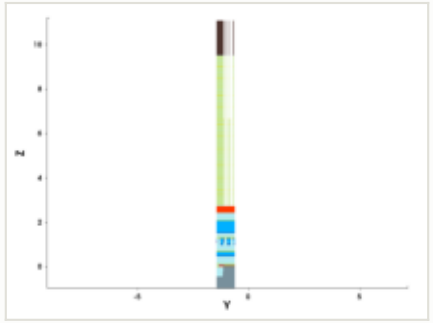

y cut at -1.035 µm

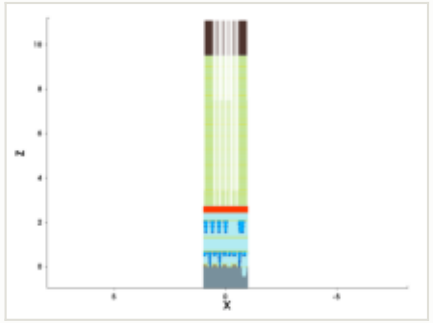

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

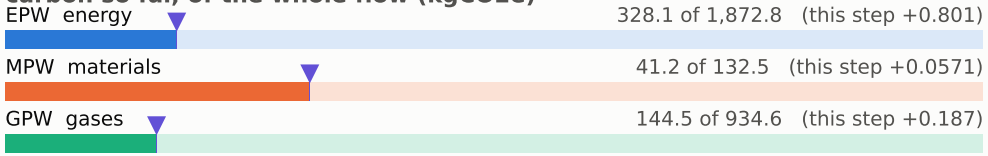

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

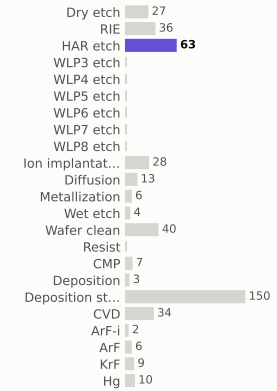

materials deposited (g)

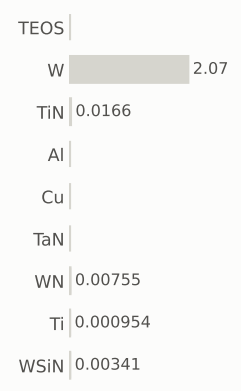

gases emitted (g)

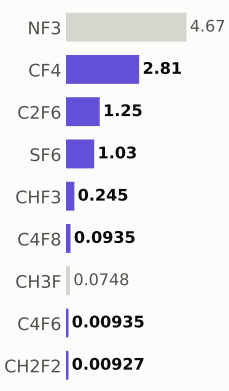

Step #5378.4: HAR_etch

etch_noop · HAR_etch

1.04	514.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

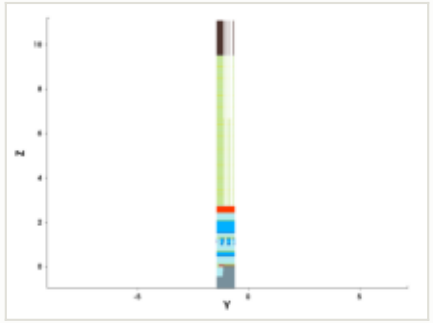

y cut at -1.035 µm

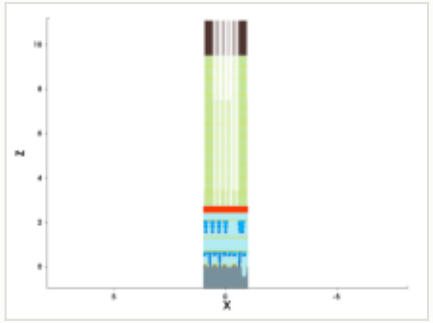

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

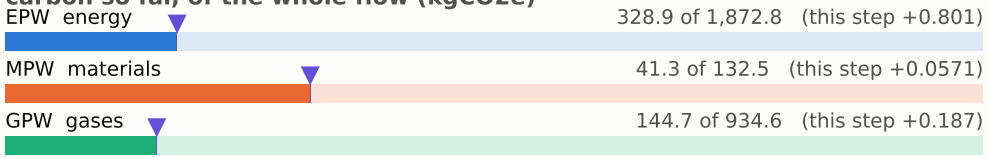

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

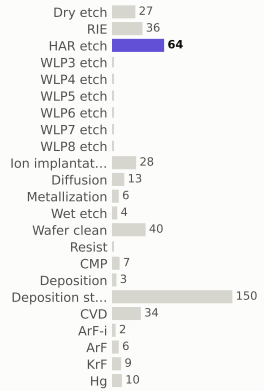

materials deposited (g)

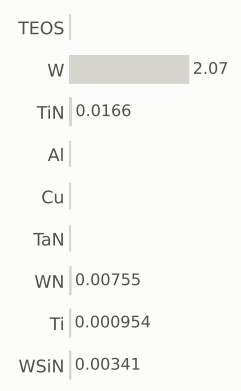

gases emitted (g)

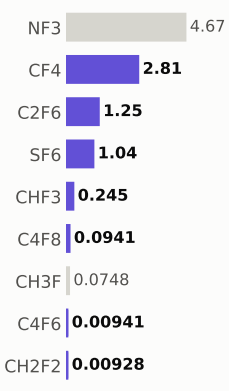

Step #5378.4667: HAR_etch

etch_noop · HAR_etch

1.04	515.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

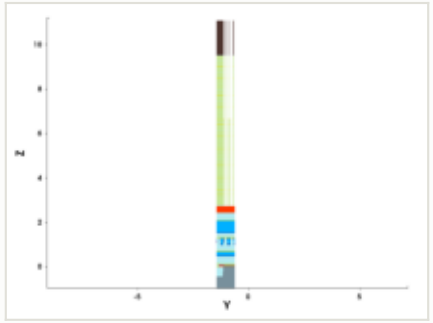

y cut at -1.035 µm

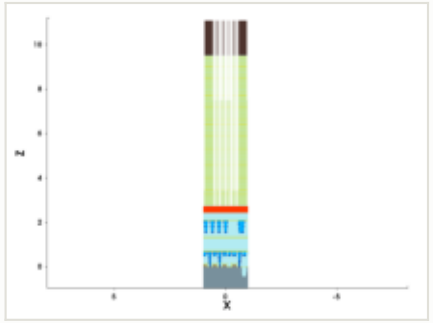

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

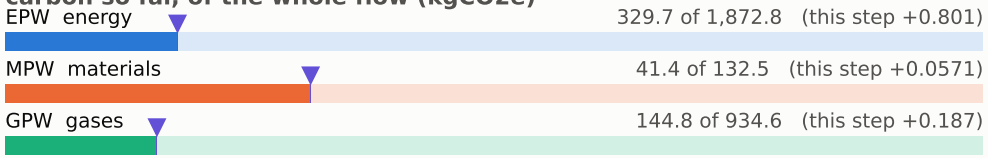

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

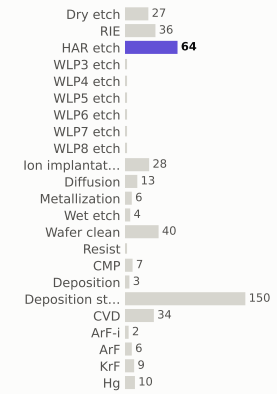

materials deposited (g)

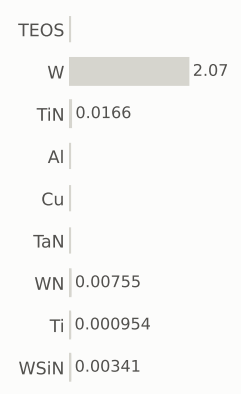

gases emitted (g)

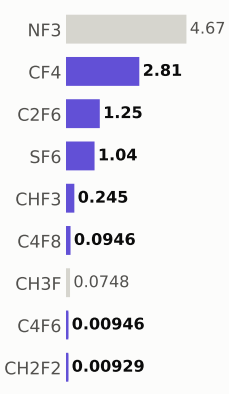

Step #5378.5333: HAR_etch

etch_noop · HAR_etch

1.04	516.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

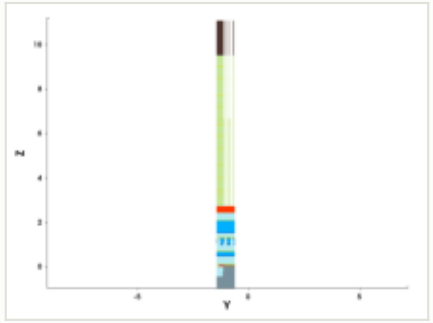

y cut at -1.035 µm

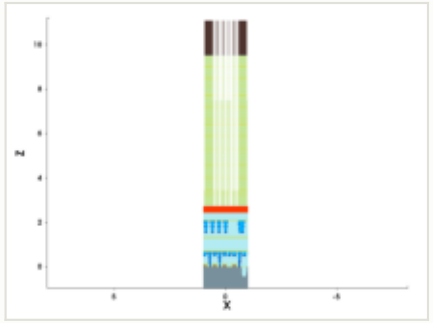

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

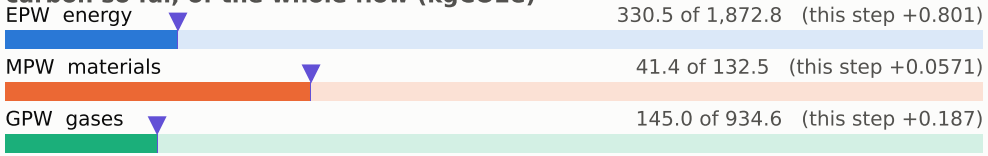

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

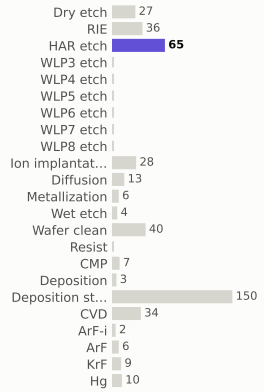

materials deposited (g)

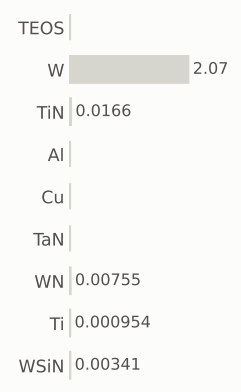

gases emitted (g)

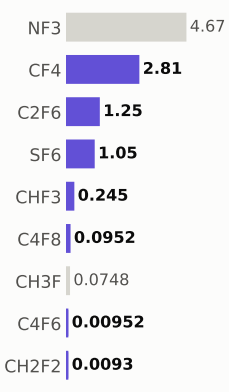

Step #5378.6: HAR_etch

etch_noop · HAR_etch

1.04	518.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

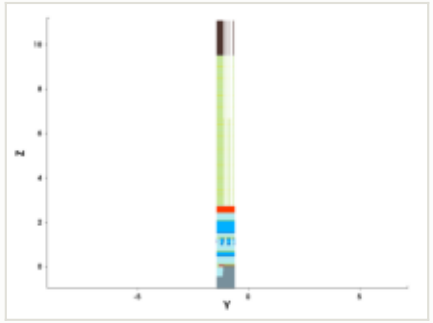

y cut at -1.035 µm

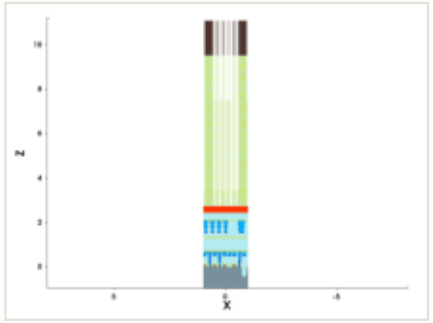

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

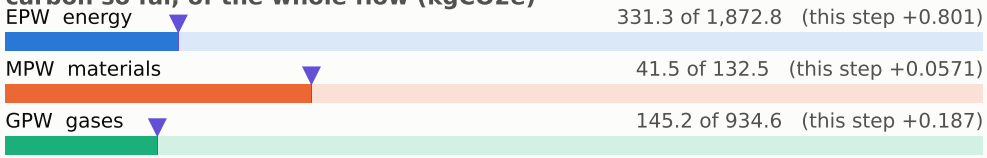

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

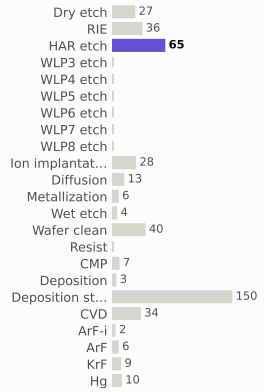

materials deposited (g)

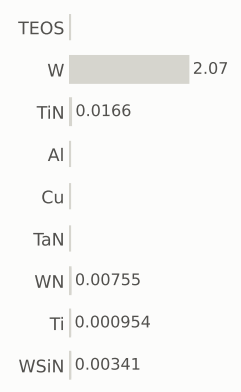

gases emitted (g)

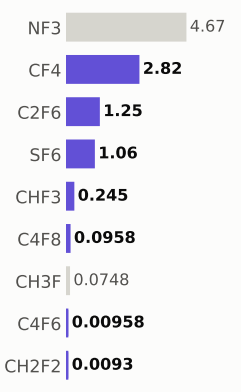

Step #5378.6667: HAR_etch

etch_noop · HAR_etch

1.04	519.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

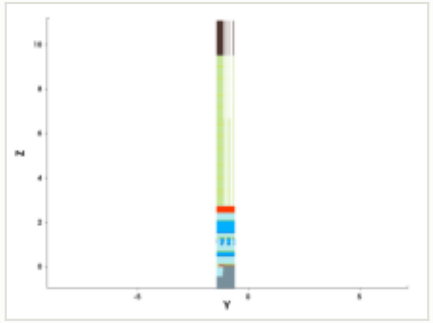

y cut at -1.035 µm

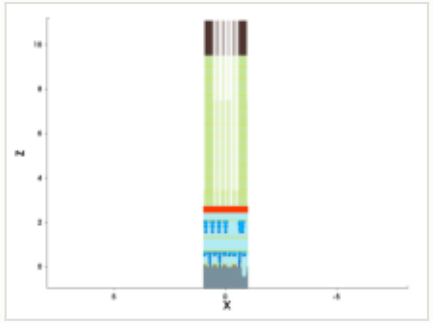

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

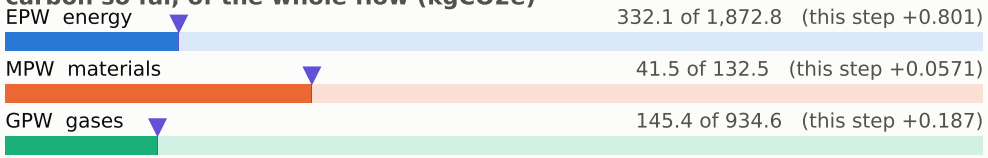

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

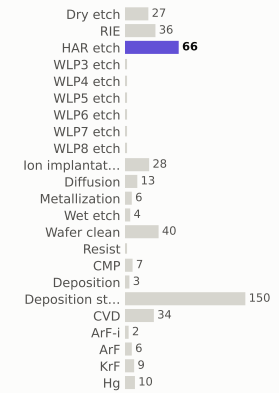

materials deposited (g)

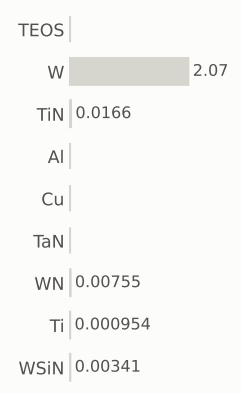

gases emitted (g)



Step #5378.7333: HAR_etch

etch_noop · HAR_etch

1.04	520.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

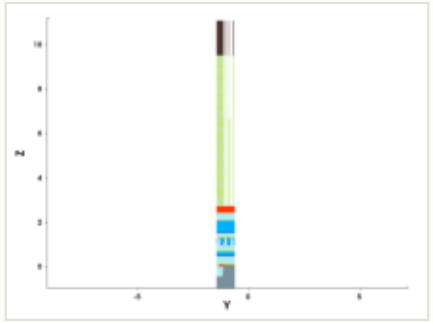

y cut at -1.035 µm

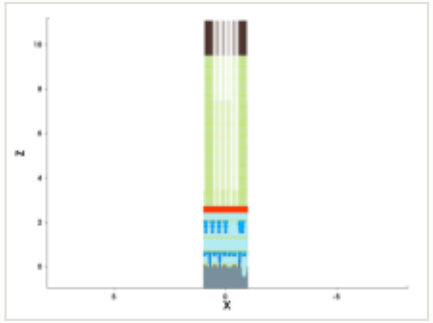

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

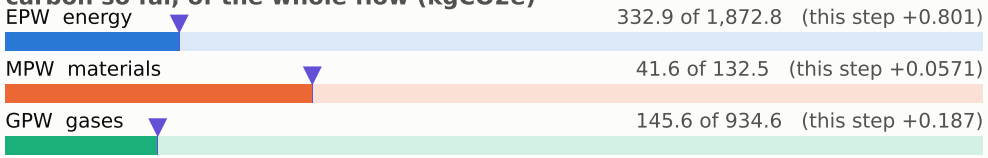

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

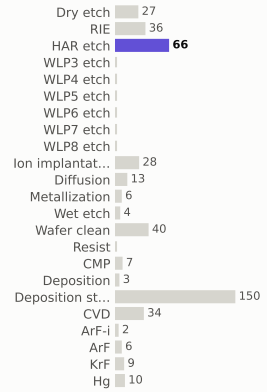

materials deposited (g)

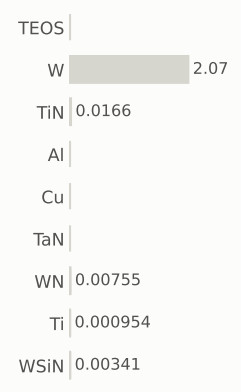

gases emitted (g)

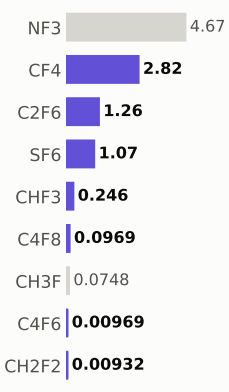

Step #5378.8: HAR_etch

etch_noop · HAR_etch

1.04	521.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

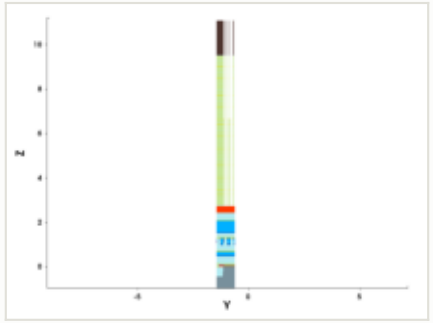

y cut at -1.035 µm

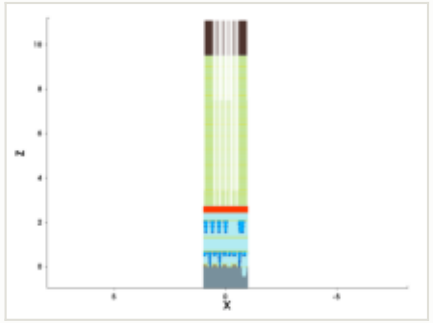

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

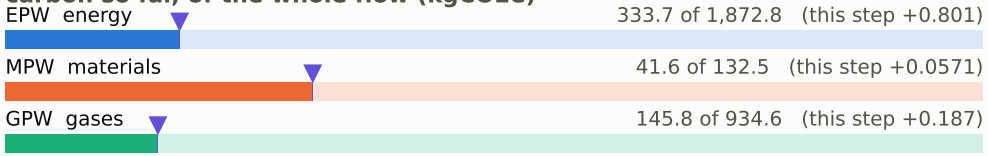

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

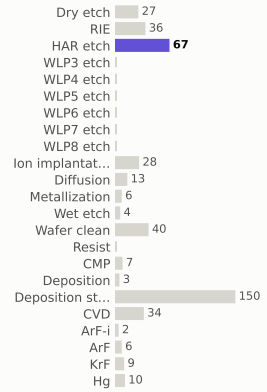

materials deposited (g)

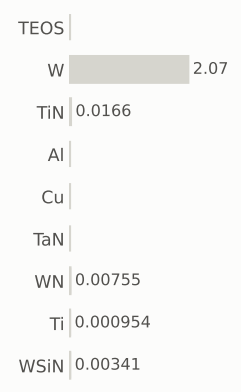

gases emitted (g)

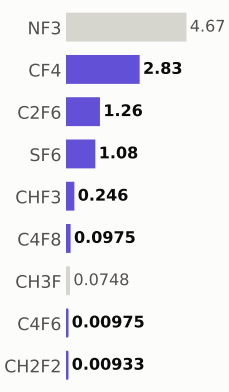

Step #5378.8667: HAR_etch

etch_noop · HAR_etch

1.04	522.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

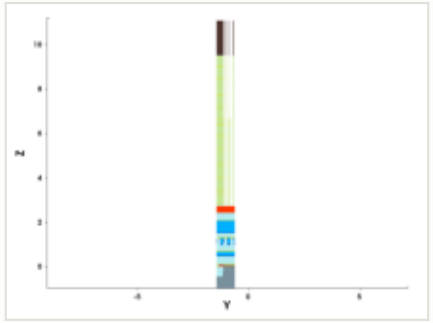

y cut at -1.035 µm

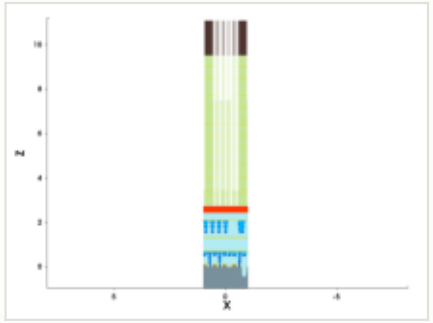

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

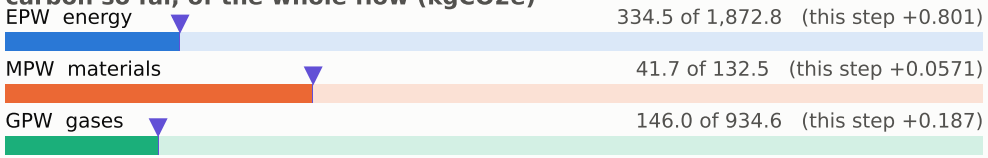

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

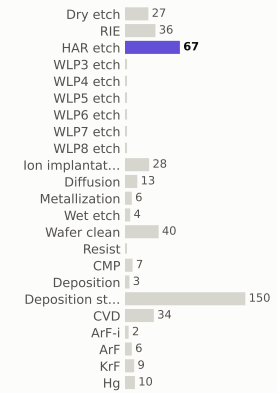

materials deposited (g)



gases emitted (g)

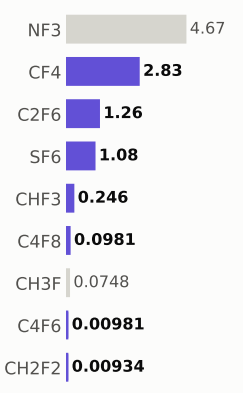

Step #5378.9333: HAR_etch

etch_noop · HAR_etch

1.04	523.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

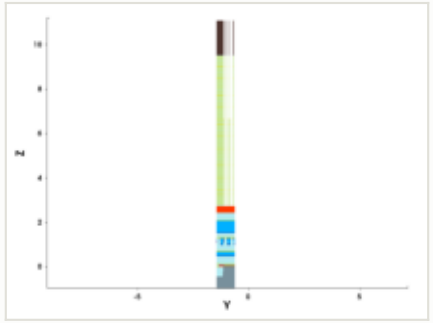

y cut at -1.035 µm

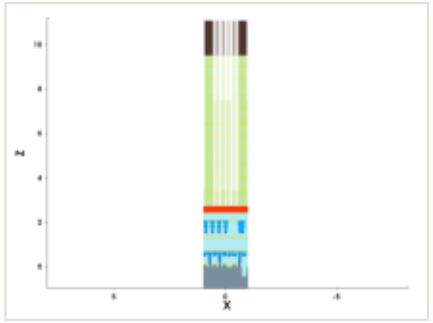

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

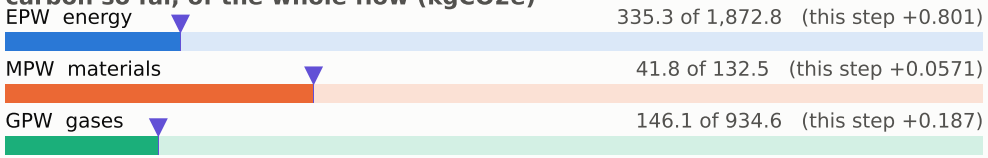

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

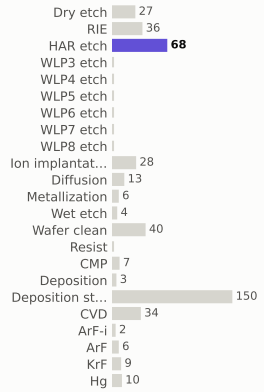

materials deposited (g)

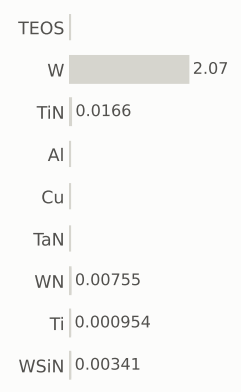

gases emitted (g)

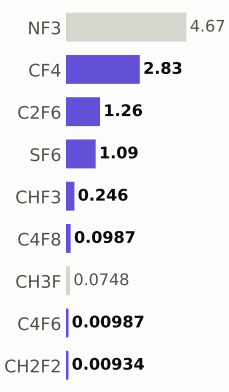

Step #5379: HAR_etch

etch_noop · HAR_etch

1.04	524.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

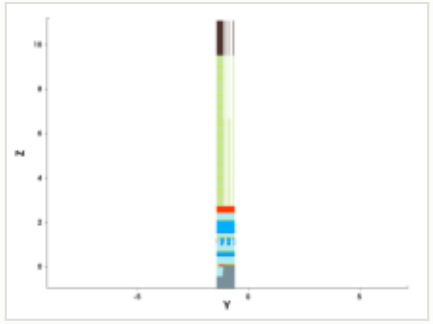

y cut at -1.035 µm

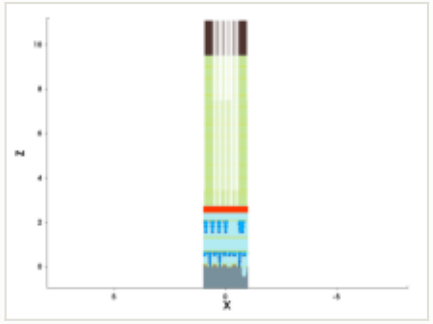

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

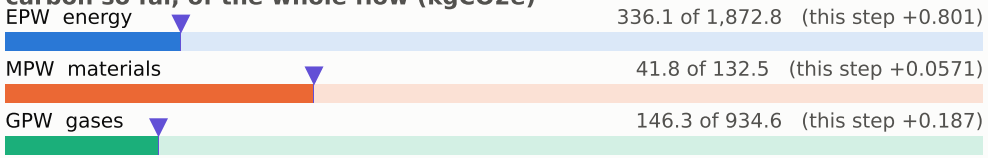

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

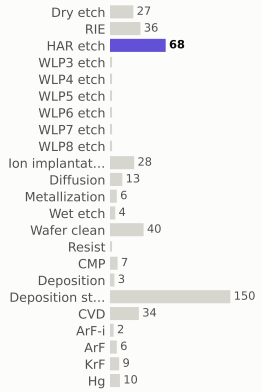

materials deposited (g)

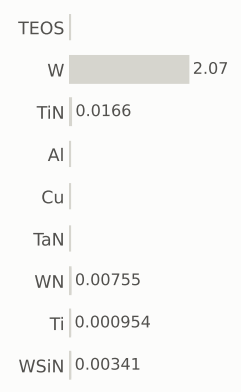

gases emitted (g)

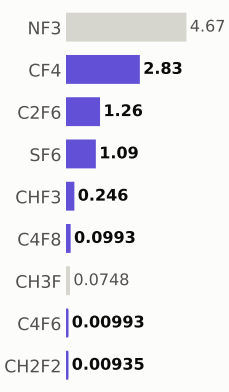

Step #5379.0667: HAR_etch

etch_noop · HAR_etch

1.04	525.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

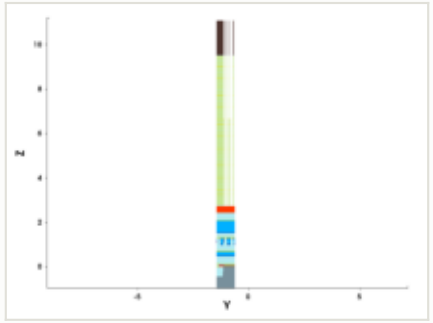

y cut at -1.035 µm

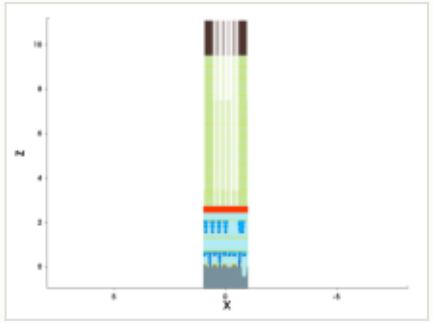

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

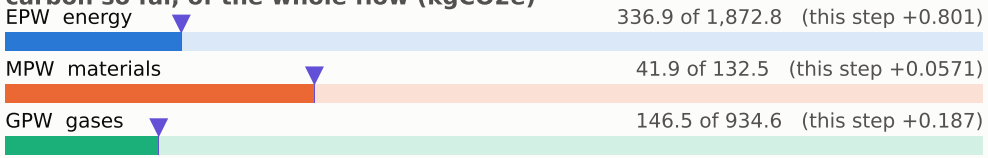

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

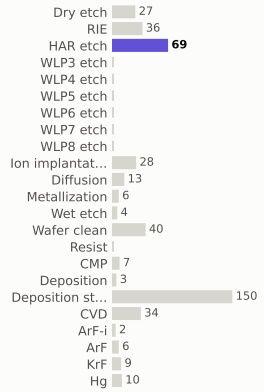

materials deposited (g)

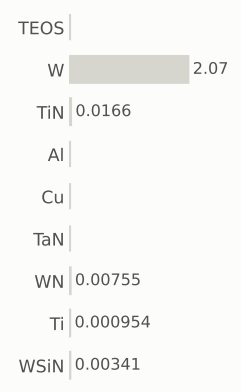

gases emitted (g)

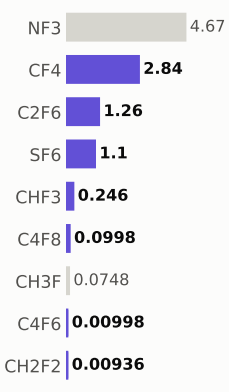

Step #5379.1333: HAR_etch

etch_noop · HAR_etch

1.04	526.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

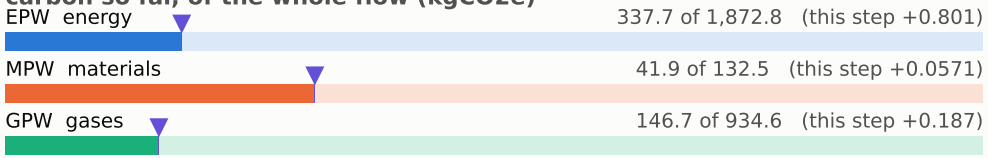

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

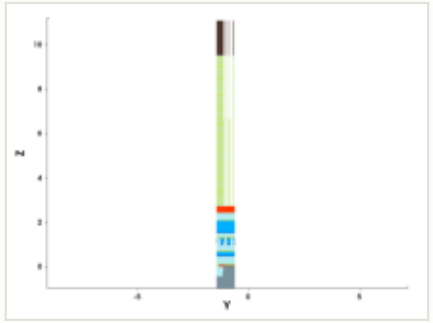

y cut at -1.035 µm

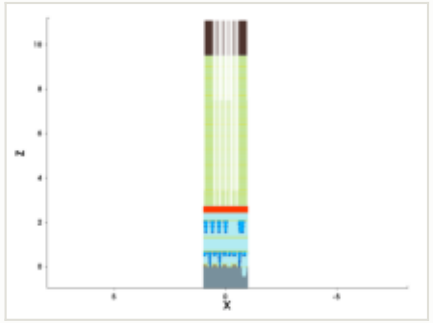

mask for this step

no mask for this step

steps by process area

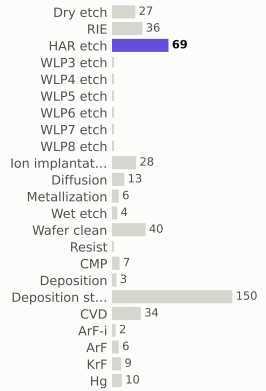

materials deposited (g)

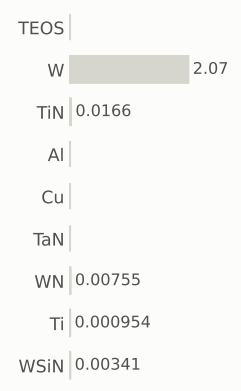

gases emitted (g)

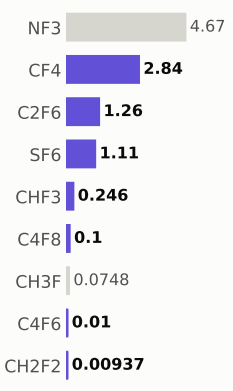

Step #5379.2: HAR_etch

etch_noop · HAR_etch

1.04	527.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

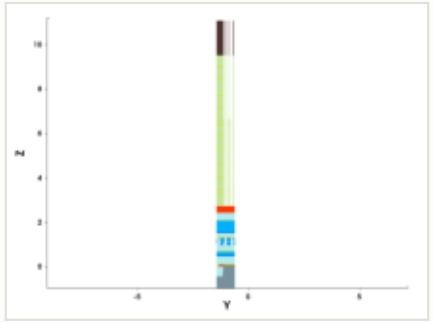

y cut at -1.035 µm

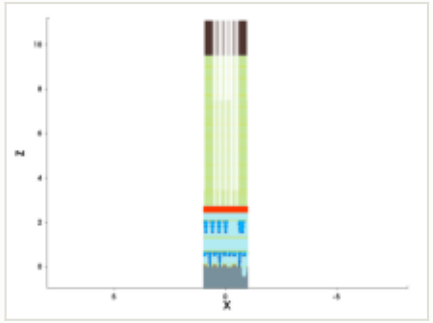

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

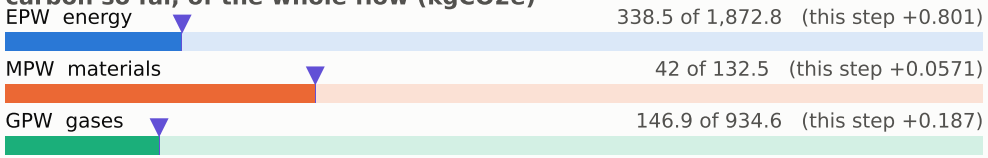

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

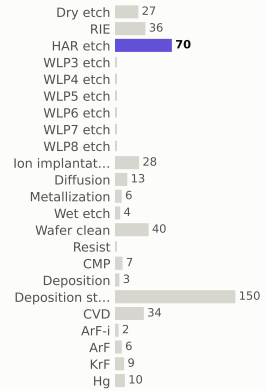

materials deposited (g)

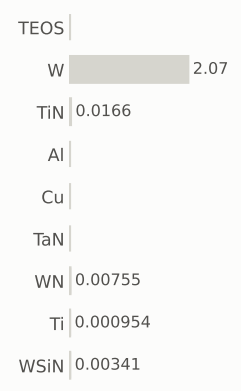

gases emitted (g)

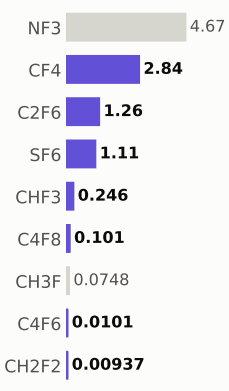

Step #5379.2667: HAR_etch

etch_noop · HAR_etch

1.04	528.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

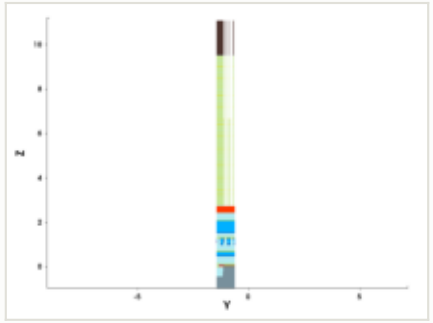

y cut at -1.035 µm

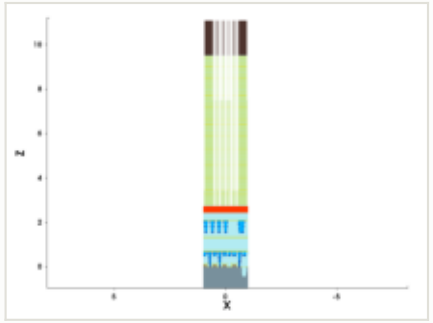

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

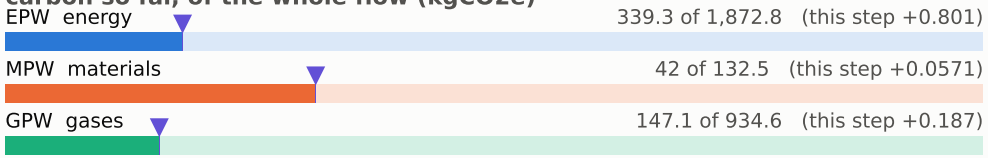

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

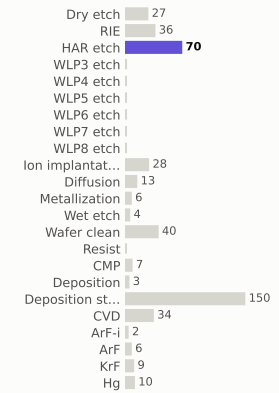

materials deposited (g)



gases emitted (g)

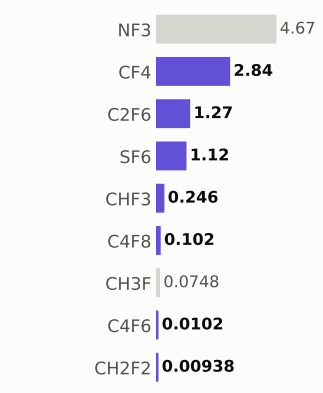

Step #5379.3333: HAR_etch

etch_noop · HAR_etch

1.04	529.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

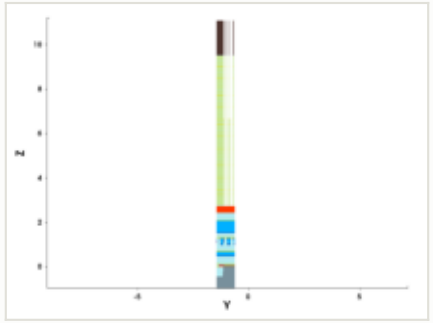

y cut at -1.035 µm

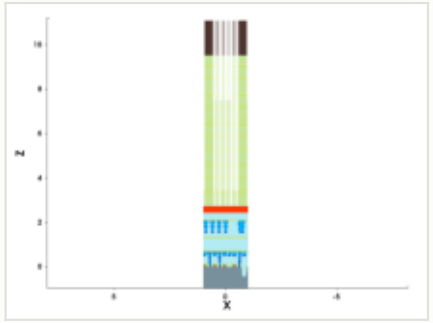

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

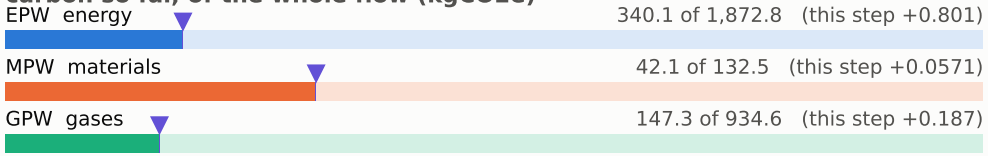

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

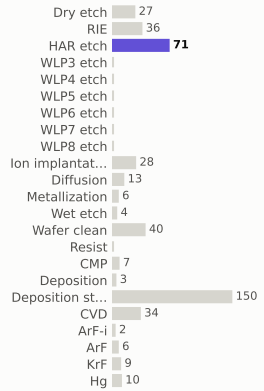

materials deposited (g)

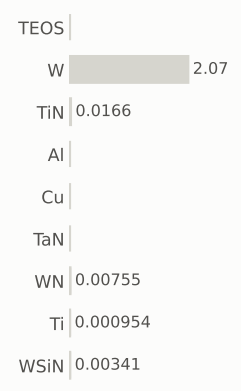

gases emitted (g)

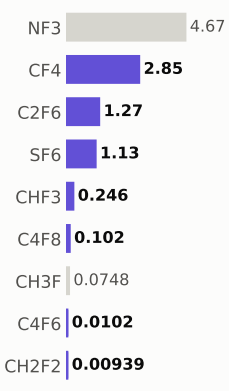

Step #5379.4: HAR_etch

etch_noop · HAR_etch

1.04	530.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

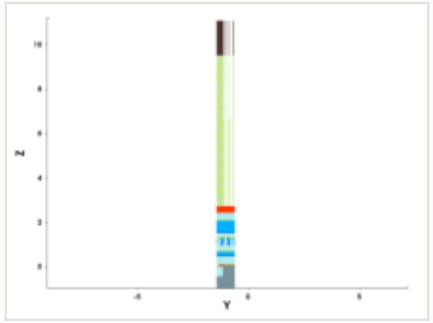

y cut at -1.035 µm

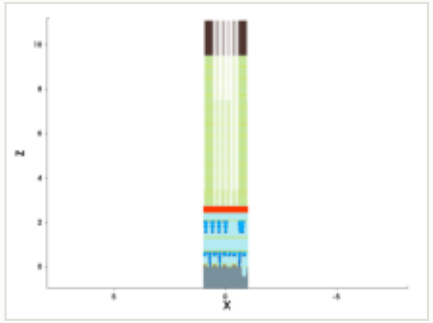

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

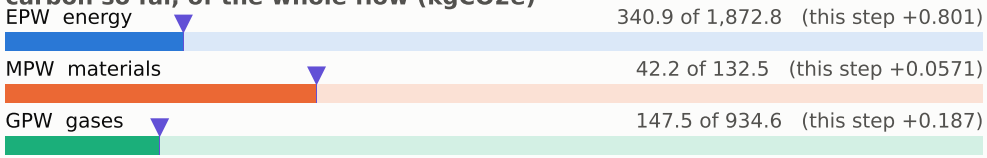

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

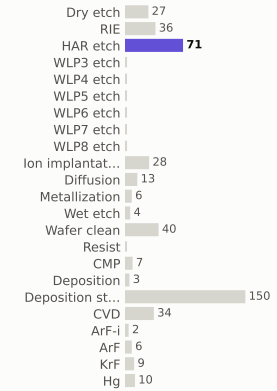

materials deposited (g)

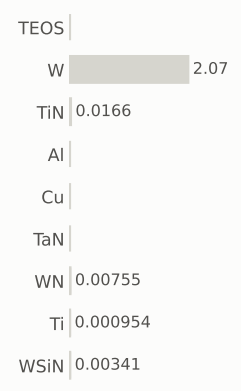

gases emitted (g)

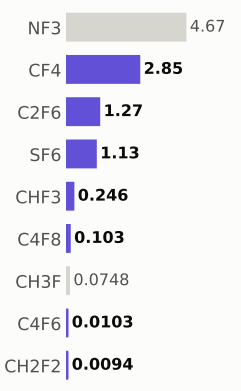

Step #5379.4667: HAR_etch

etch_noop · HAR_etch

1.04	531.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

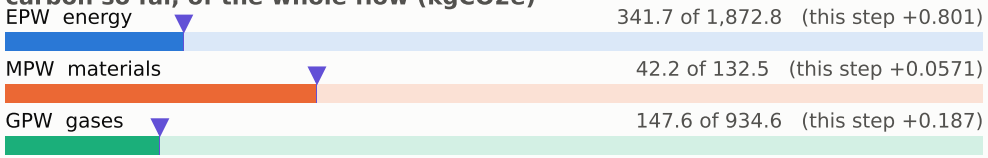

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

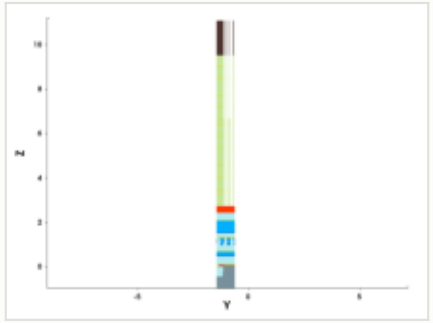

y cut at -1.035 µm

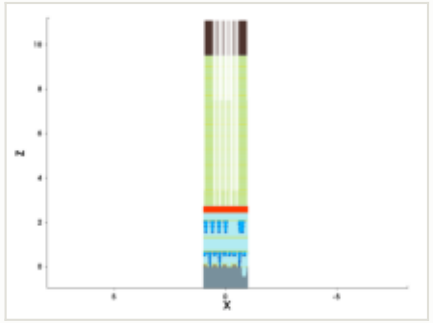

mask for this step

no mask for this step

steps by process area

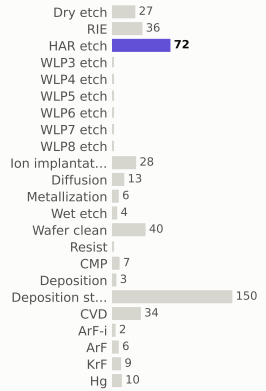

materials deposited (g)

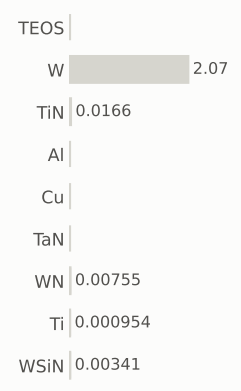

gases emitted (g)

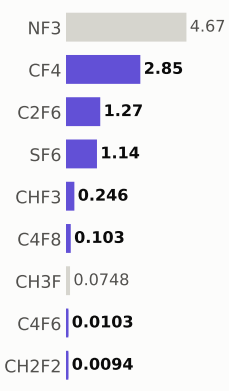

Step #5379.5333: HAR_etch

etch_noop · HAR_etch

1.04	532.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

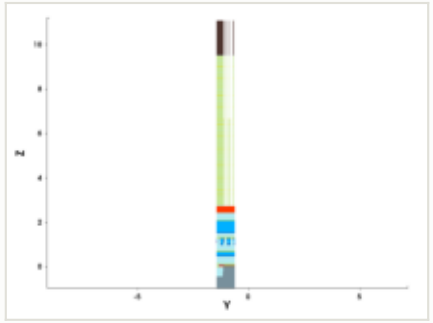

y cut at -1.035 µm

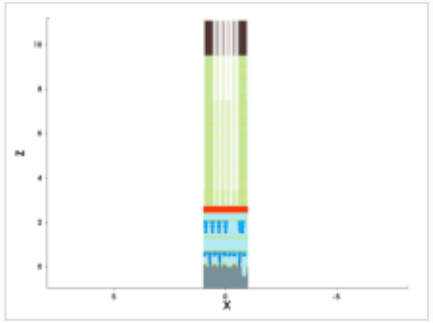

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

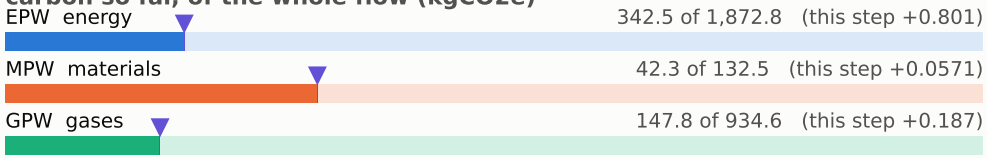

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

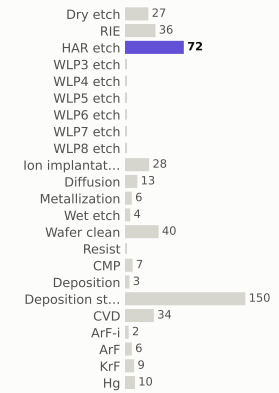

materials deposited (g)

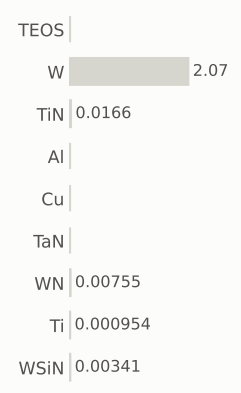

gases emitted (g)

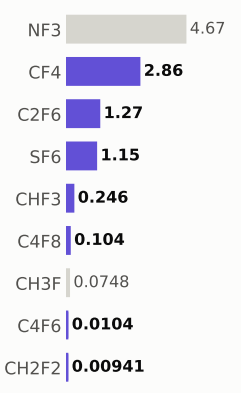

Step #5379.6: HAR_etch

etch_noop · HAR_etch

1.04	533.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

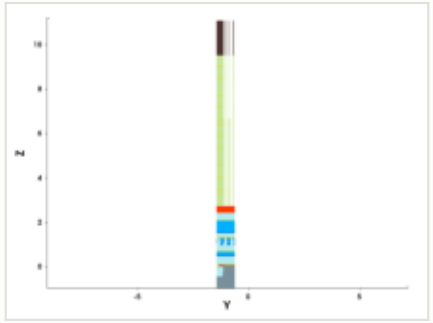

y cut at -1.035 µm

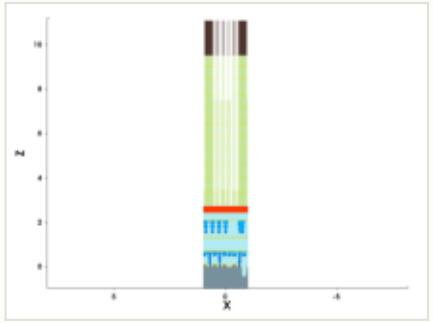

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

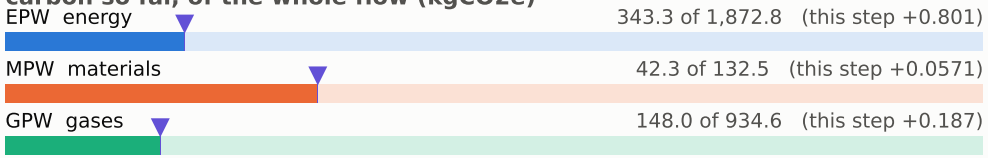

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

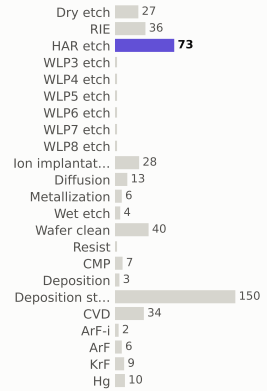

materials deposited (g)

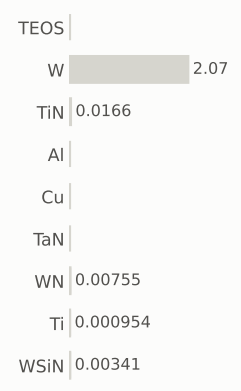

gases emitted (g)

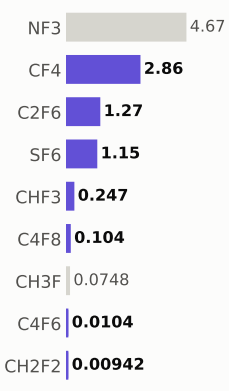

Step #5379.6667: HAR_etch

etch_noop · HAR_etch

1.04	534.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

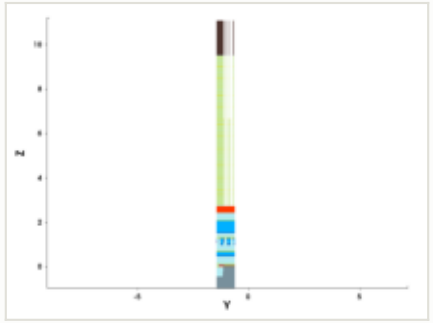

y cut at -1.035 µm

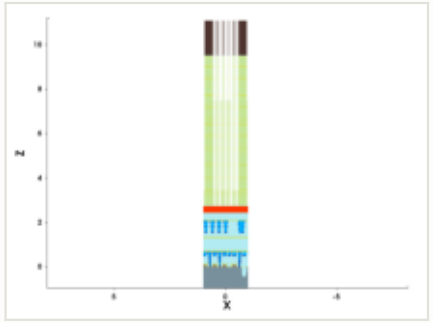

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

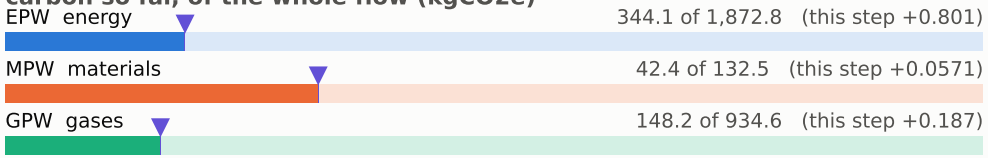

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

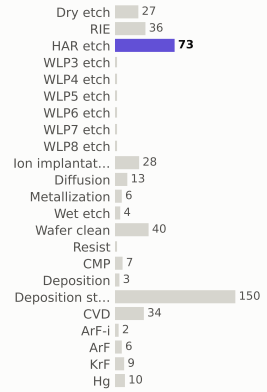

materials deposited (g)

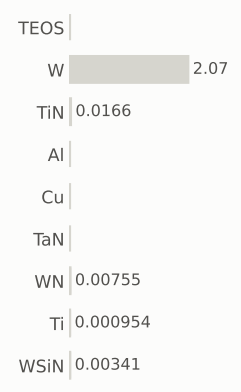

gases emitted (g)

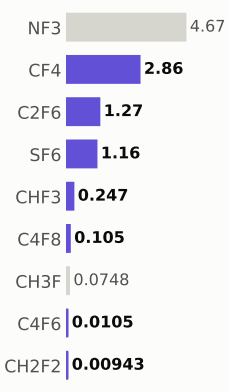

Step #5379.7333: HAR_etch

etch_noop · HAR_etch

1.04	535.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

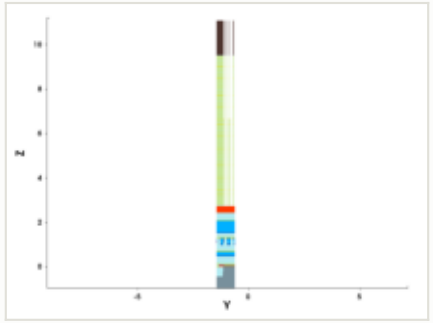

y cut at -1.035 µm

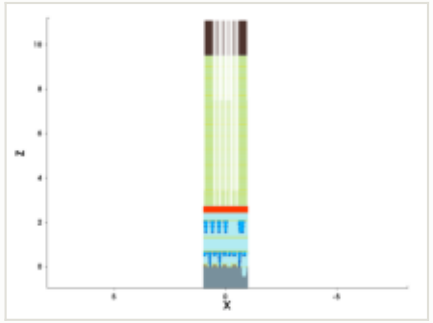

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

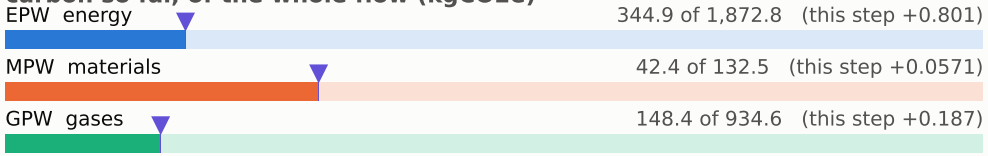

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

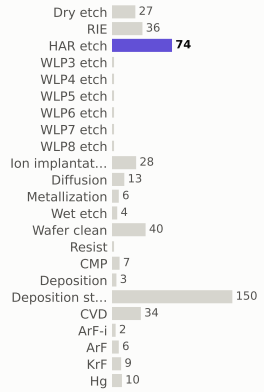

materials deposited (g)

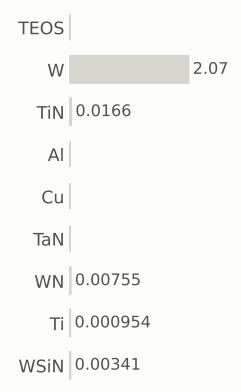

gases emitted (g)

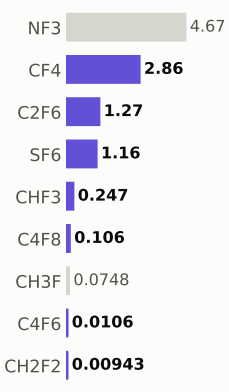

Step #5379.8: HAR_etch

etch_noop · HAR_etch

1.04	536.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

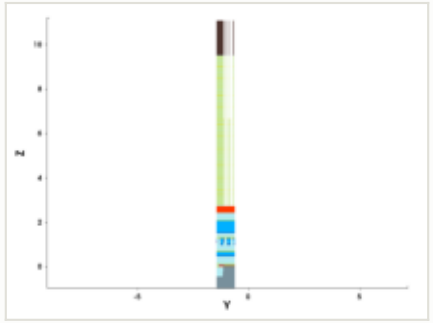

y cut at -1.035 µm

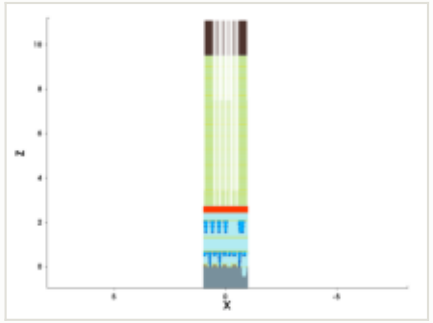

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

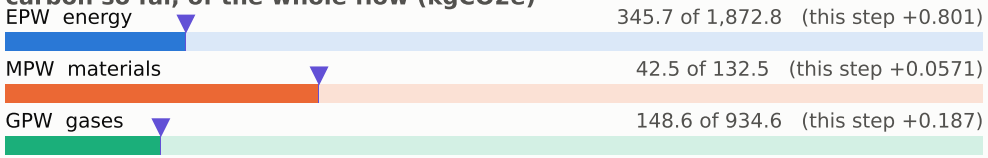

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

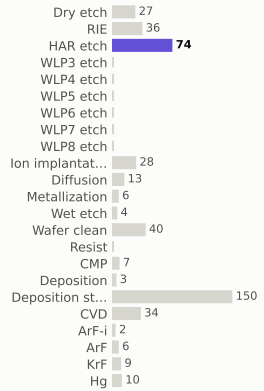

materials deposited (g)

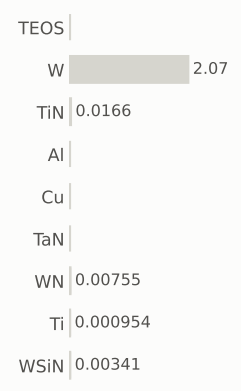

gases emitted (g)

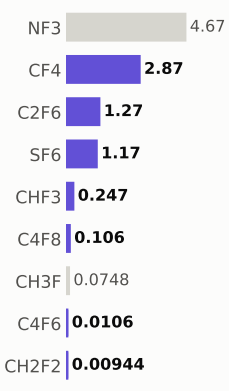

Step #5379.8667: HAR_etch

etch_noop · HAR_etch

1.04	537.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

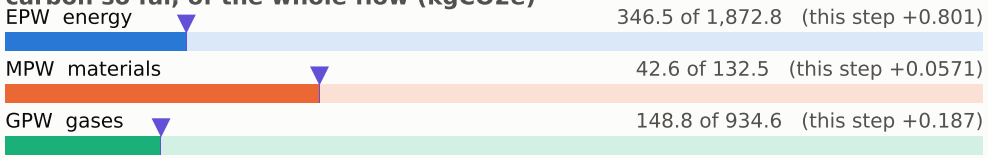

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

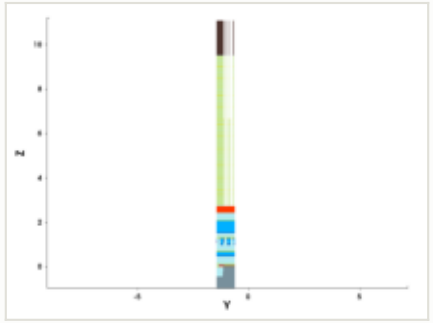

y cut at -1.035 µm

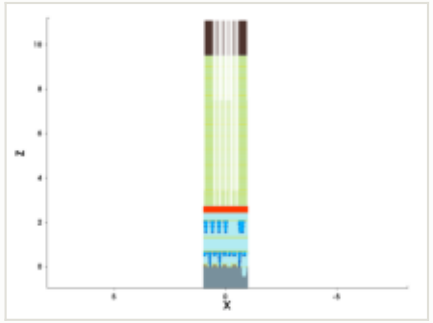

mask for this step

no mask for this step

steps by process area

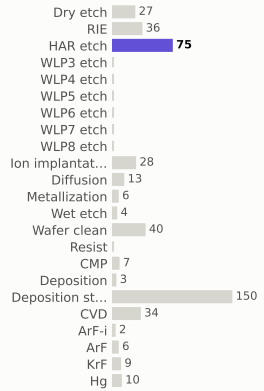

materials deposited (g)

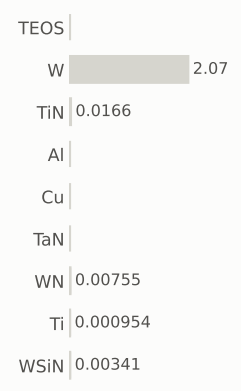

gases emitted (g)

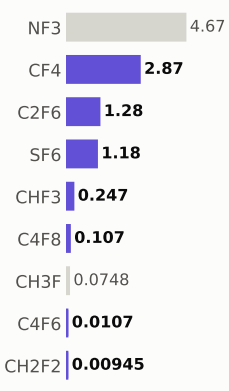

Step #5379.9333: HAR_etch

etch_noop · HAR_etch

1.04	538.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

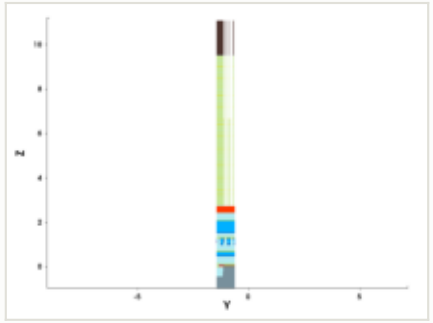

y cut at -1.035 µm

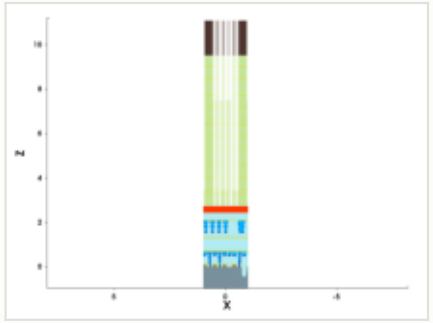

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

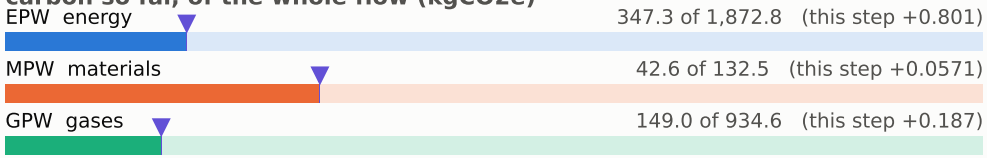

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

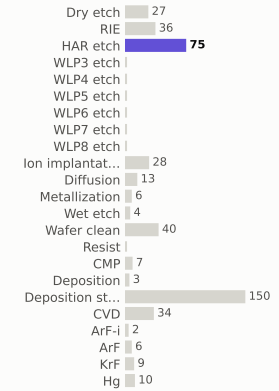

materials deposited (g)



gases emitted (g)

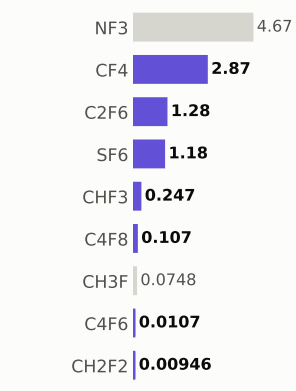

Step #5380: RIE

etch_anisotropic · RIE

1.04	539.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

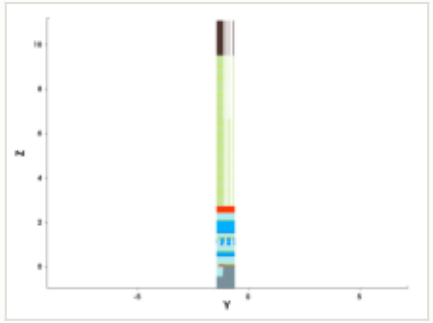

y cut at -1.035 µm

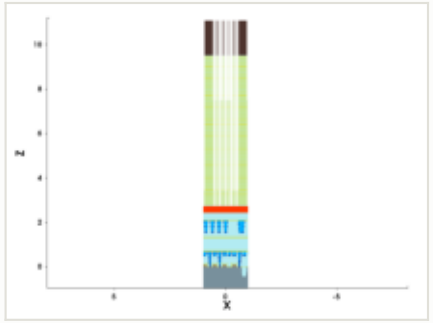

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 348.1 of 1,872.8 (this step +0.801)

MPW materials — 42.7 of 132.5 (this step +0.0571)

GPW gases — 149.1 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

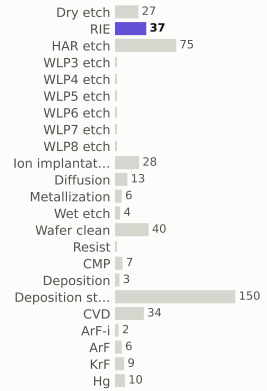

materials deposited (g)

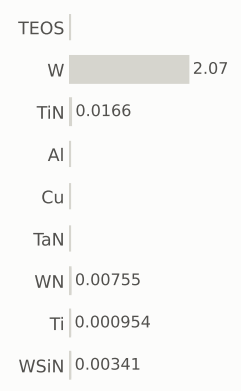

gases emitted (g)

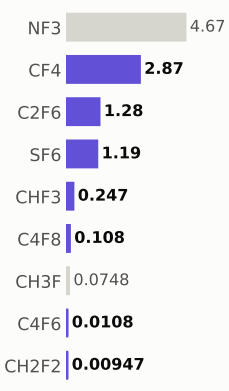

Step #5390: RIE

etch_anisotropic · RIE

1.04	541.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

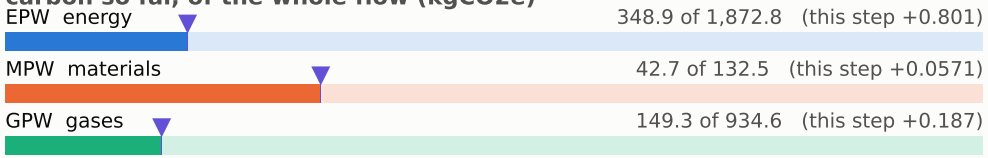

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

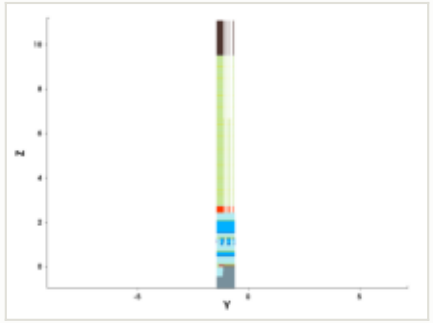

y cut at -1.035 µm

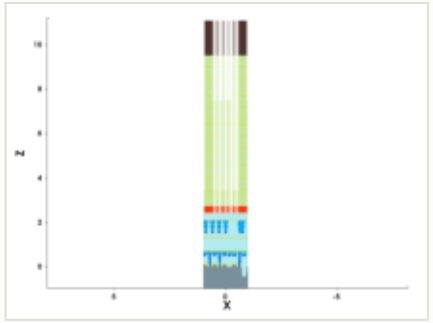

mask for this step

no mask for this step

steps by process area

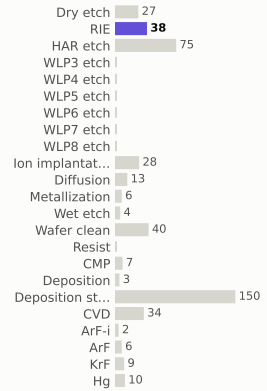

materials deposited (g)

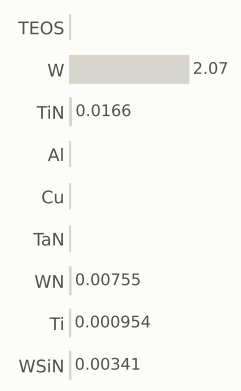

gases emitted (g)

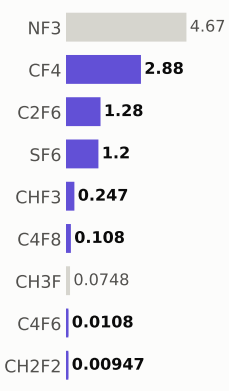

Step #5400: RIE

etch_anisotropic · RIE

1.04	542.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

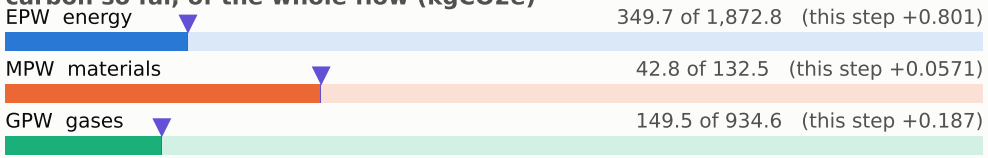

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

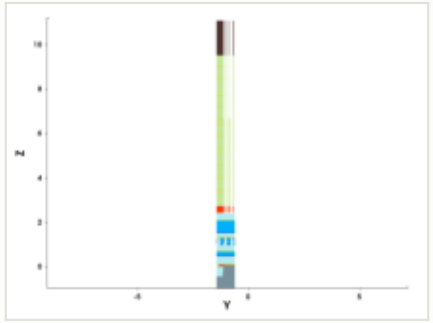

y cut at -1.035 µm

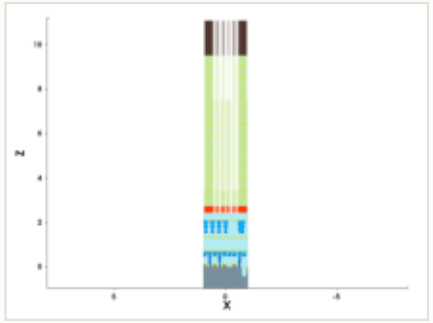

mask for this step

no mask for this step

steps by process area

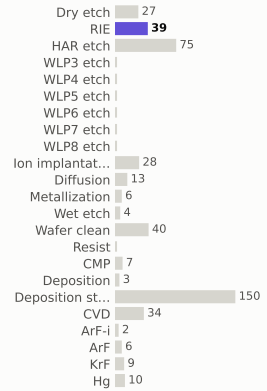

materials deposited (g)

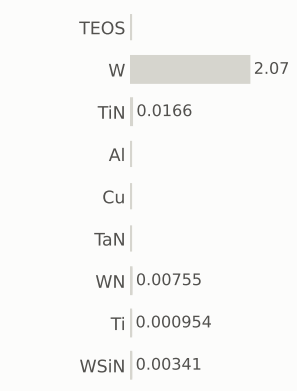

gases emitted (g)

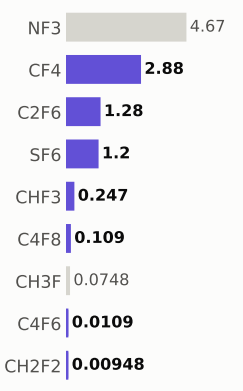

Step #5410: Dry_etch

etch_strip · Dry_etch

0.801	542.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

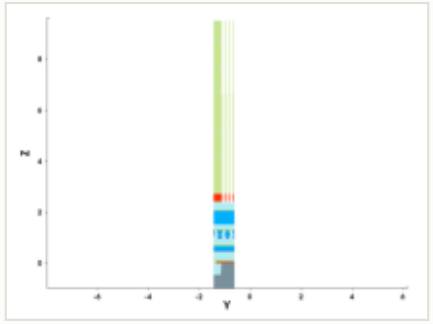

y cut at -1.035 µm

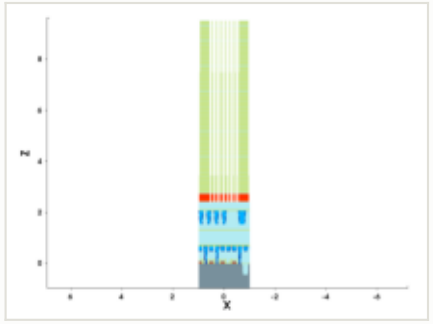

mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

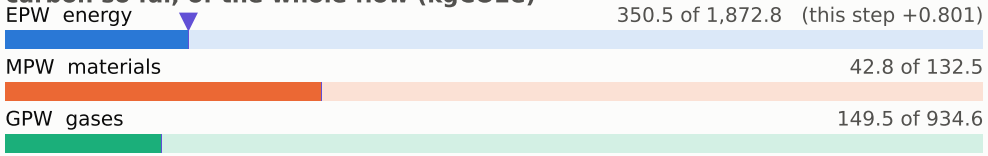

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

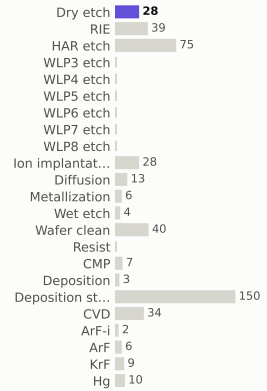

materials deposited (g)

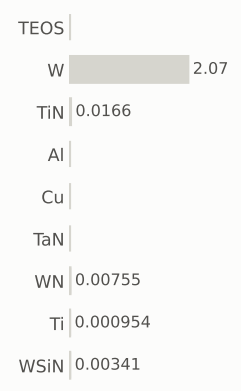

gases emitted (g)

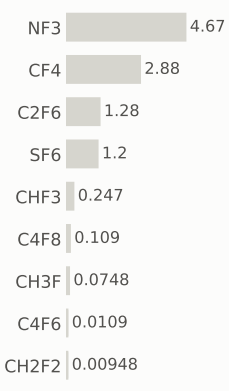

Step #5420: Wafer_clean

clean · Wafer_clean

0.169	543.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

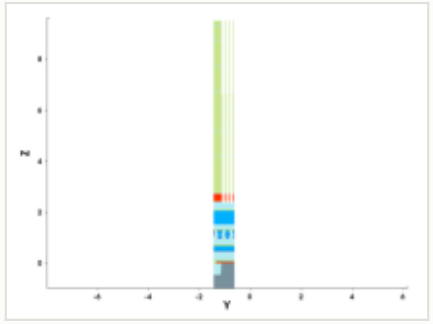

y cut at -1.035 µm

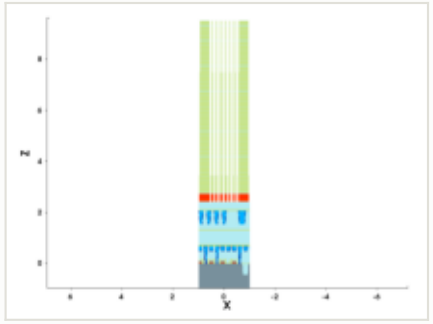

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

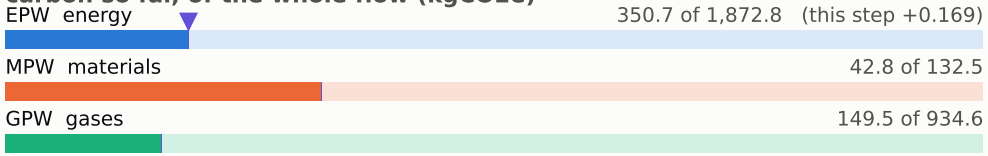

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

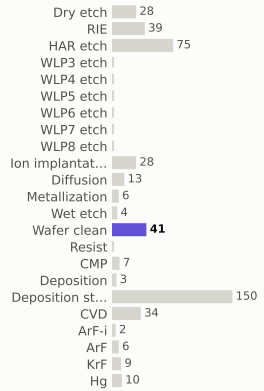

materials deposited (g)

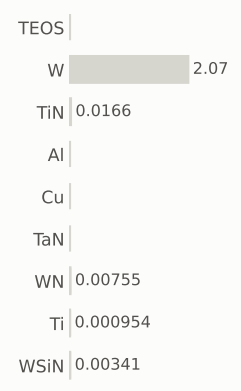

gases emitted (g)

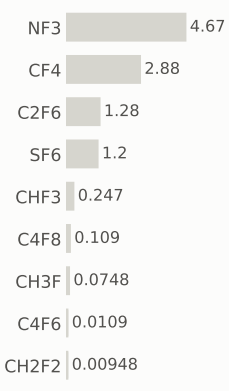

Step #5430: CVD

depo_isotropic · CVD

1.31	544.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

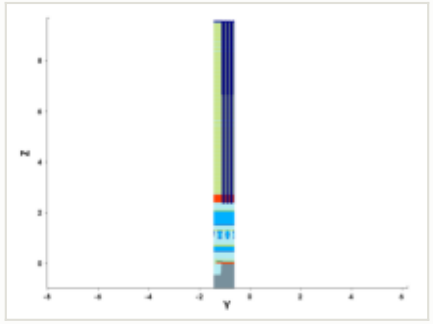

y cut at -1.035 µm

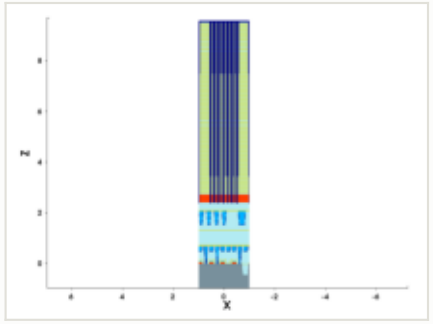

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.07 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0329 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 351.3 of 1,872.8 (this step +0.656)

MPW materials — 42.8 of 132.5 (this step +0.0329)

GPW gases — 150.1 of 934.6 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

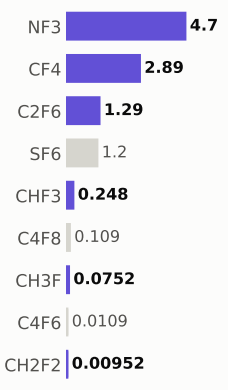

Step #5440: CMP

etch_cmp · CMP

0.169	544.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

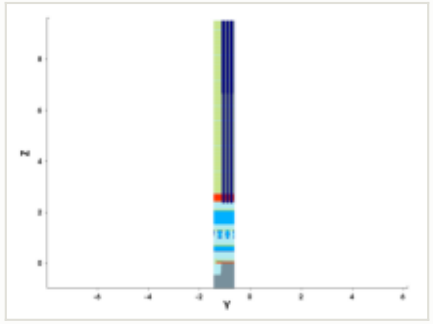

y cut at -1.035 µm

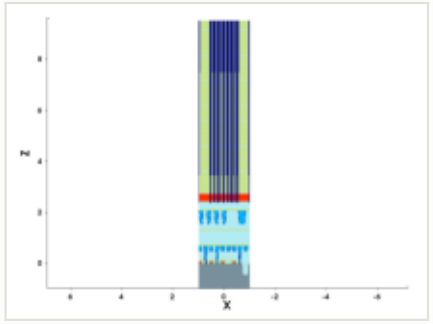

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

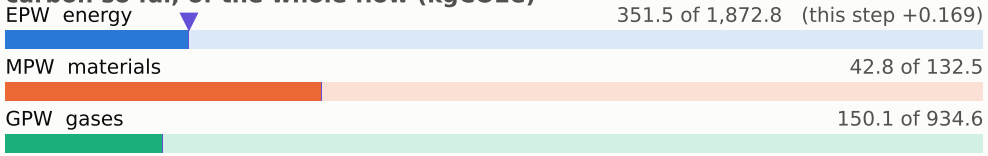

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

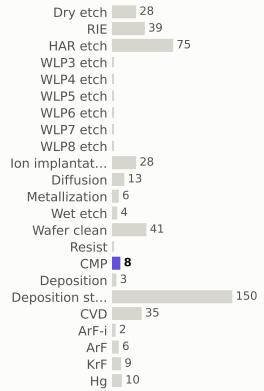

materials deposited (g)

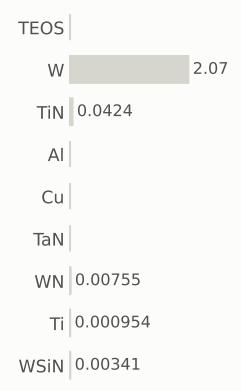

gases emitted (g)

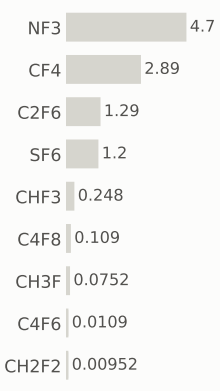

Step #5450: Wafer_clean

clean · Wafer_clean

0.169	544.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

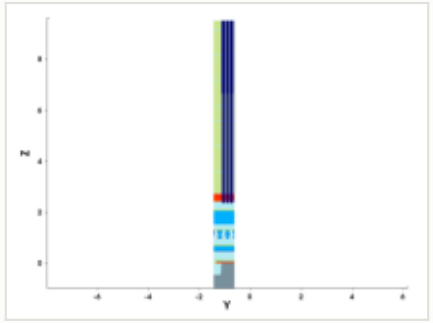

y cut at -1.035 µm

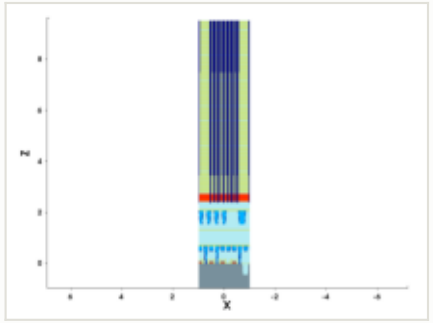

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

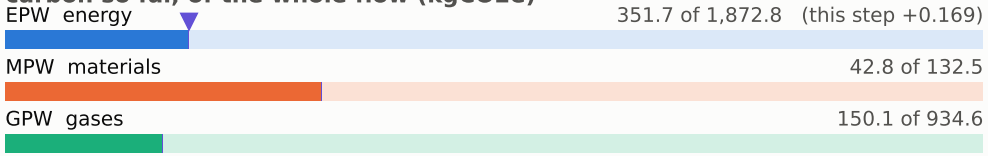

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

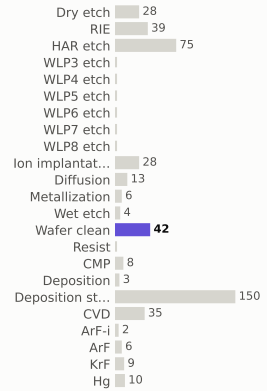

materials deposited (g)

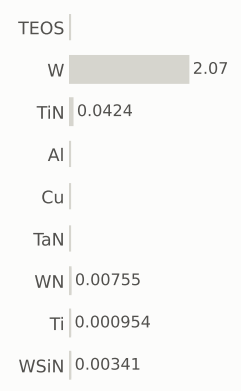

gases emitted (g)

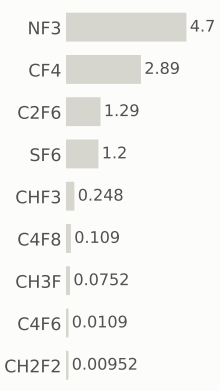

Step #5460: Wafer_clean

clean · Wafer_clean

0.169	544.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

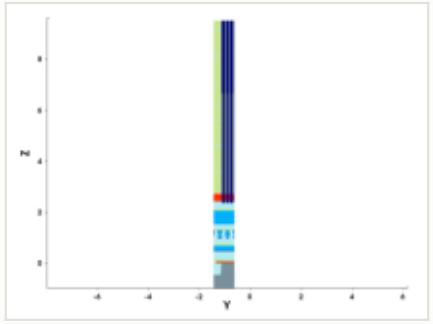

y cut at -1.035 µm

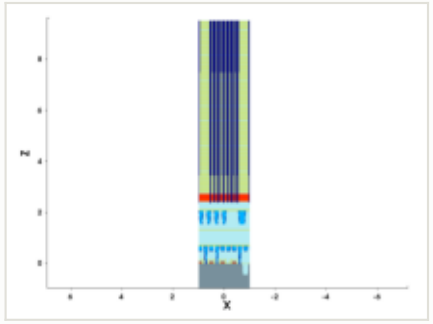

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

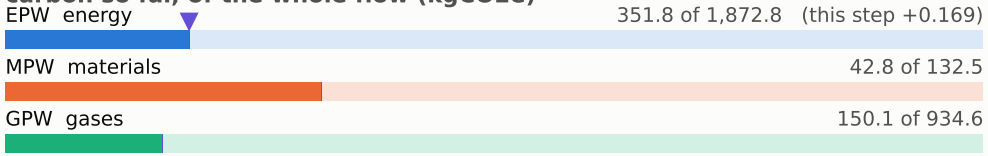

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

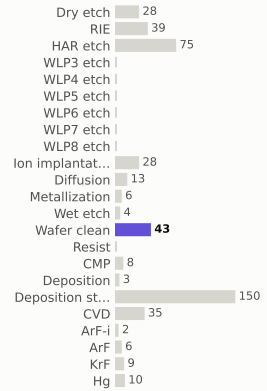

materials deposited (g)

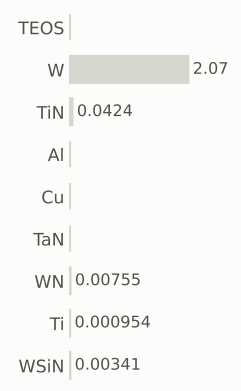

gases emitted (g)

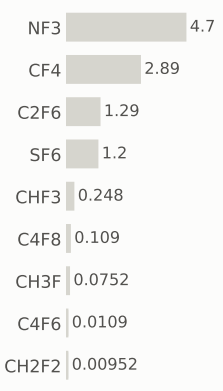

Step #5470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	545.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

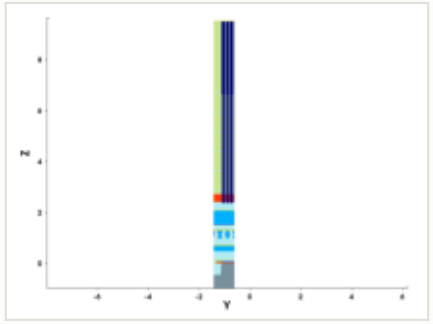

y cut at -1.035 µm

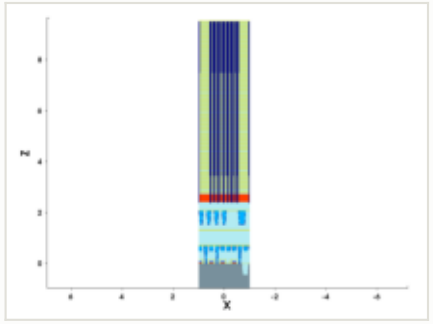

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

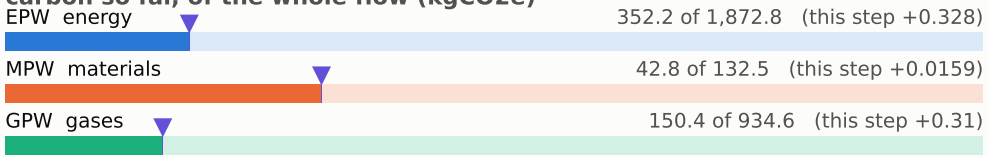

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

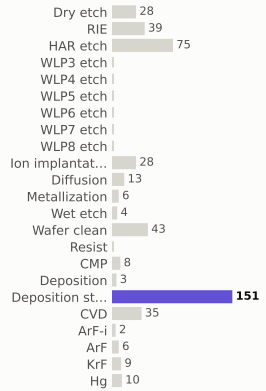

materials deposited (g)

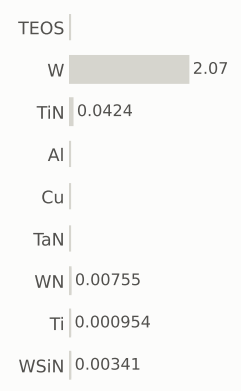

gases emitted (g)

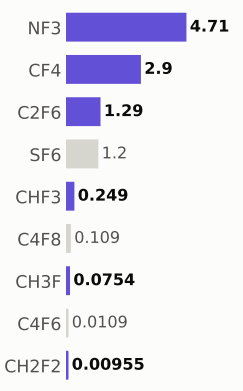

Step #5480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	546.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

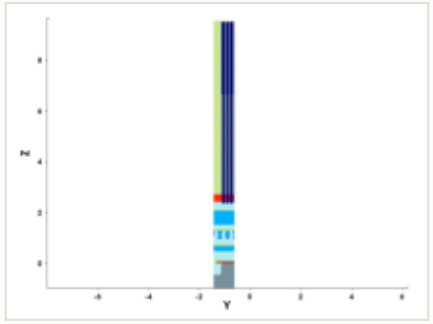

y cut at -1.035 µm

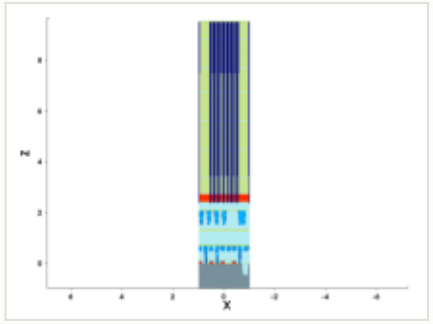

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

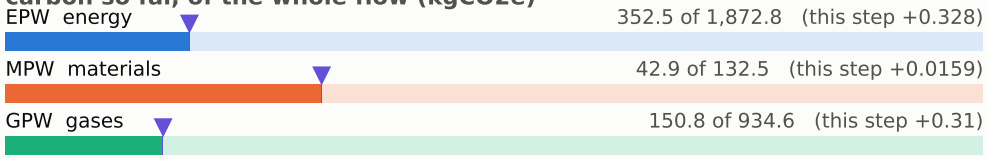

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

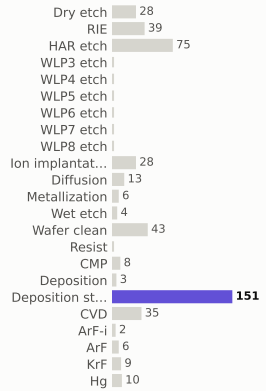

materials deposited (g)

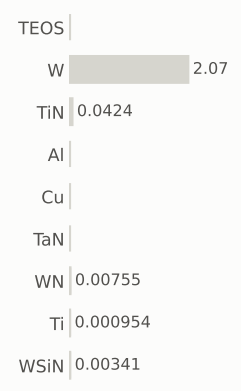

gases emitted (g)

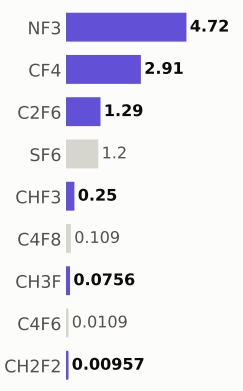

Step #5490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	546.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

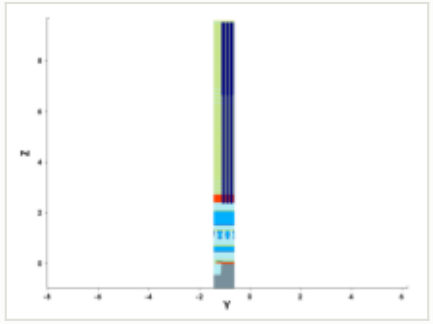

y cut at -1.035 µm

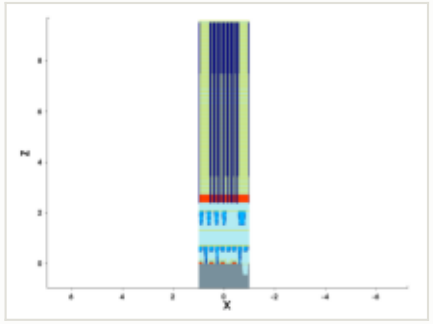

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

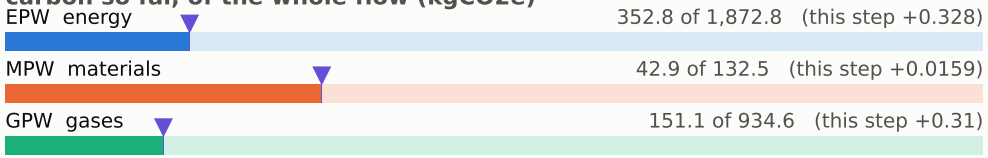

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

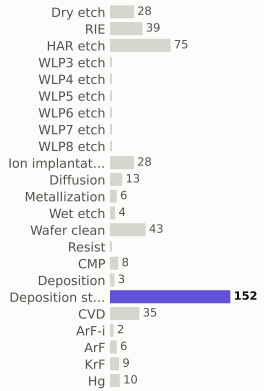

materials deposited (g)

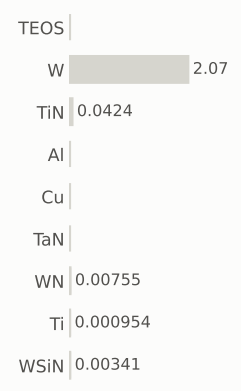

gases emitted (g)

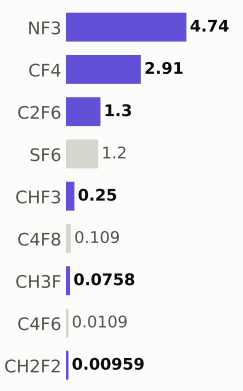

Step #5500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	547.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

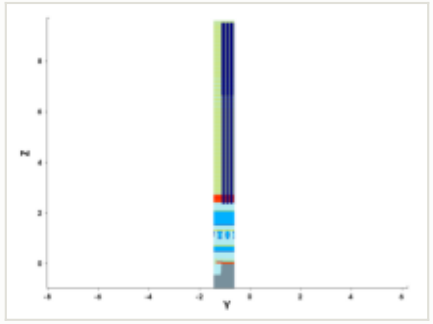

y cut at -1.035 µm

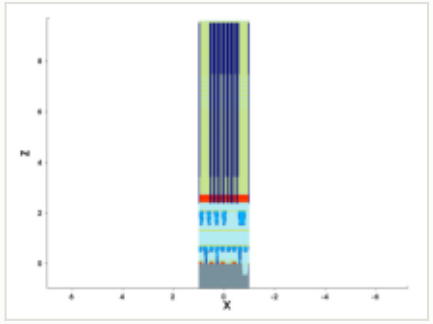

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

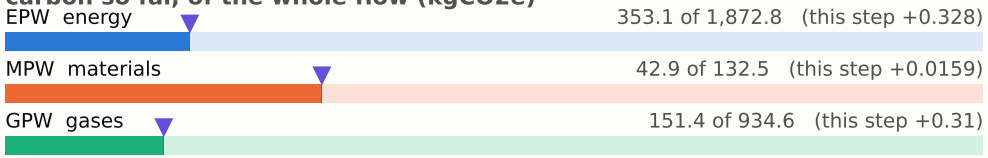

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

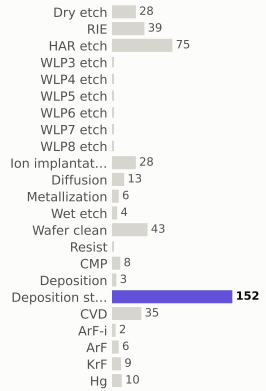

materials deposited (g)

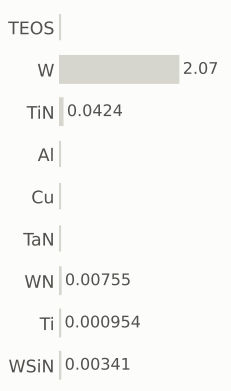

gases emitted (g)

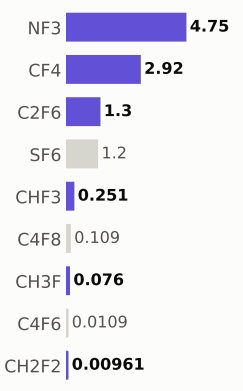

Step #5510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	548.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

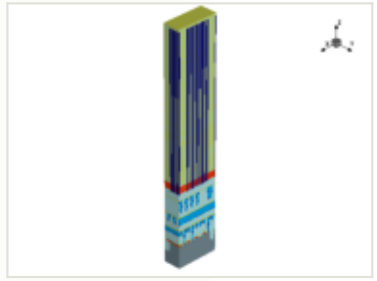

x cut at 0.000 µm

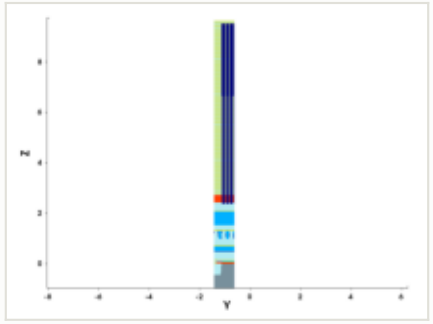

y cut at -1.035 µm

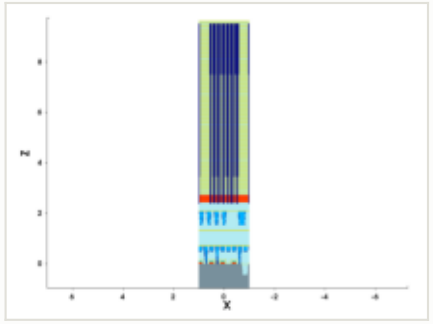

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

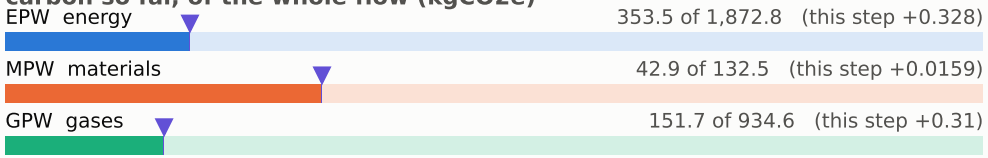

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

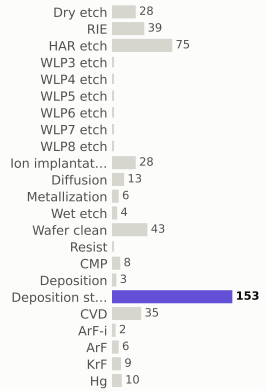

materials deposited (g)

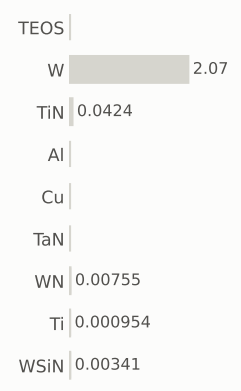

gases emitted (g)

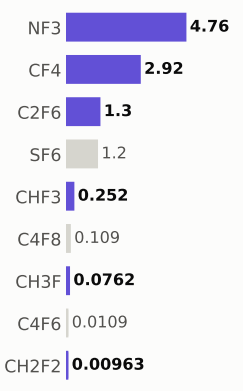

Step #5520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	548.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

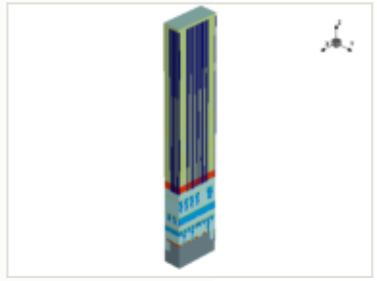

x cut at 0.000 µm

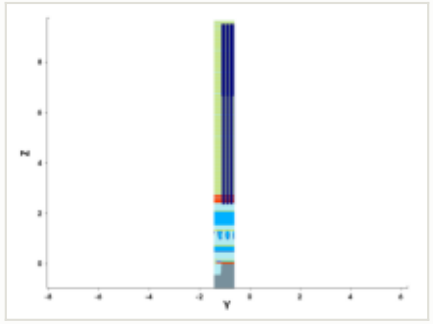

y cut at -1.035 µm

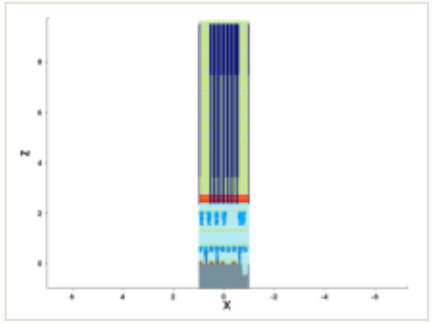

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

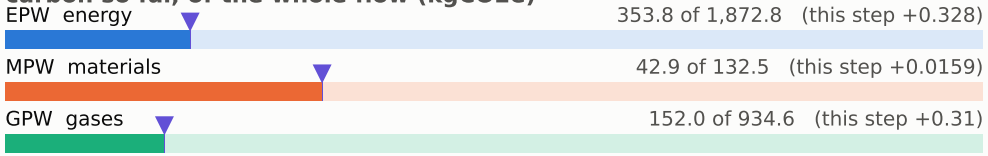

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

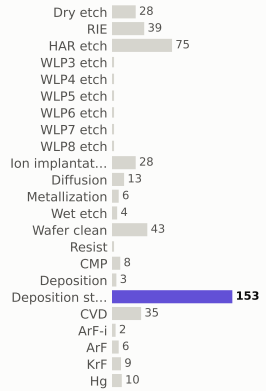

materials deposited (g)

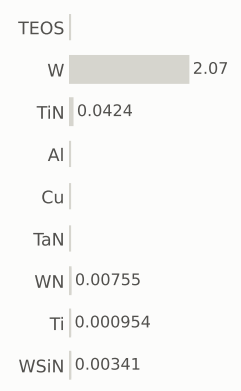

gases emitted (g)

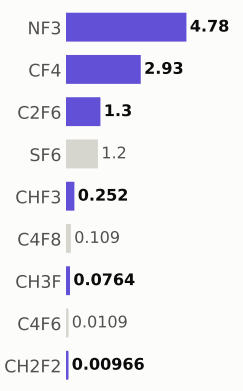

Step #5530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	549.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

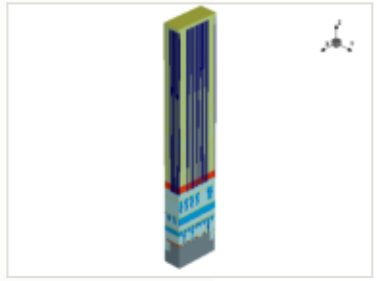

x cut at 0.000 µm

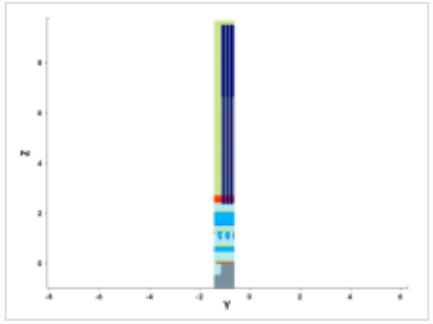

y cut at -1.035 µm

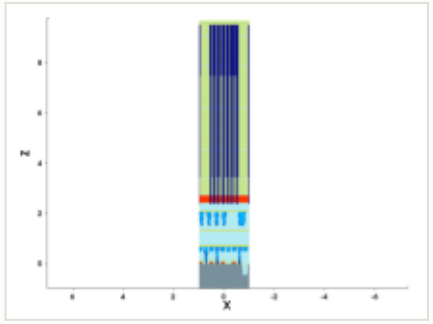

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

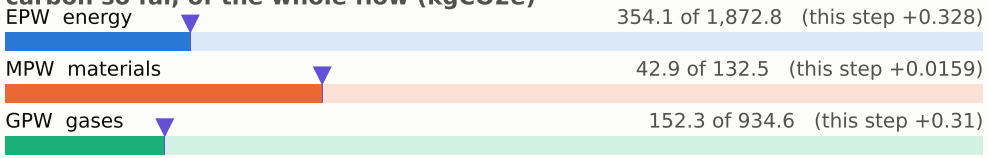

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

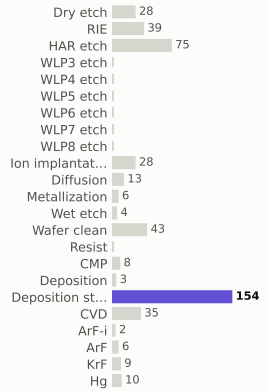

materials deposited (g)

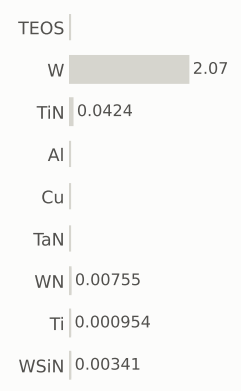

gases emitted (g)

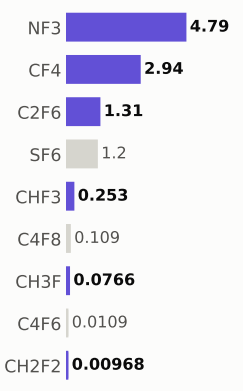

Step #5540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	550.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

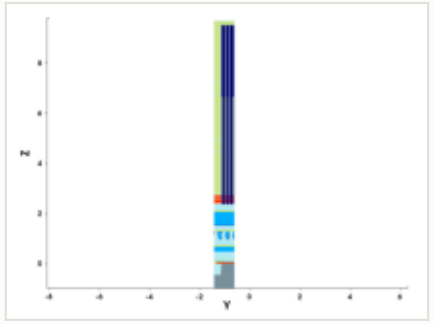

y cut at -1.035 µm

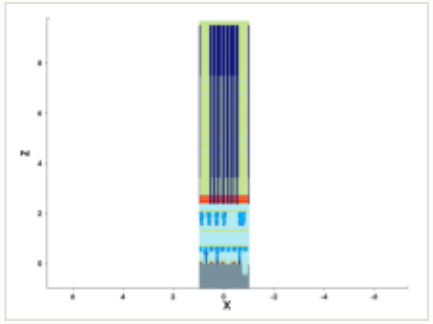

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

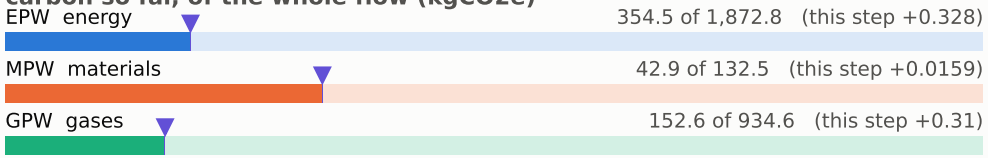

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

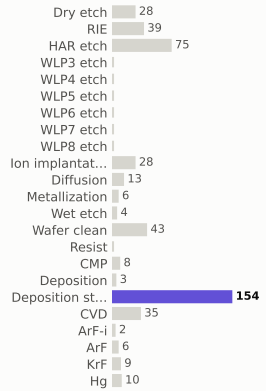

materials deposited (g)

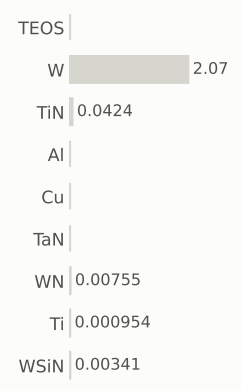

gases emitted (g)

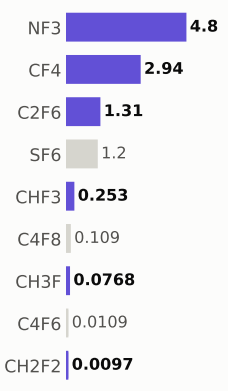

Step #5550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	550.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

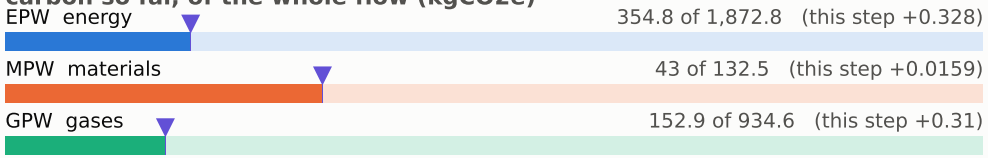

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

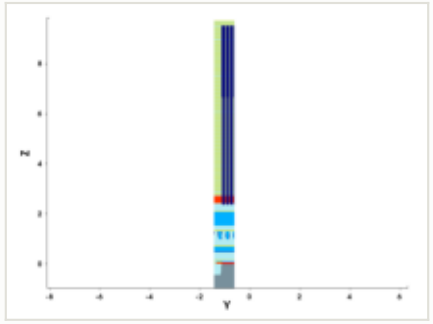

y cut at -1.035 µm

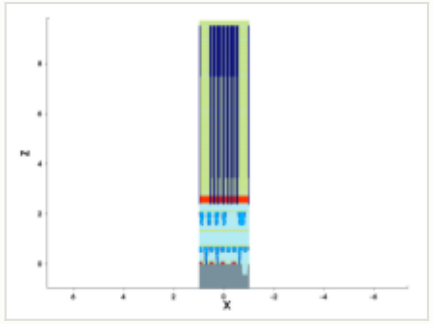

mask for this step

no mask for this step

steps by process area

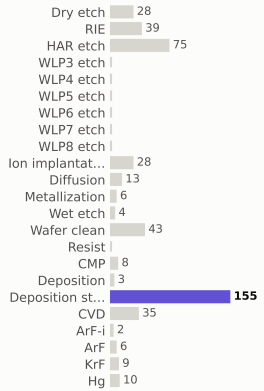

materials deposited (g)

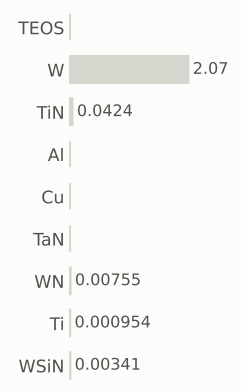

gases emitted (g)

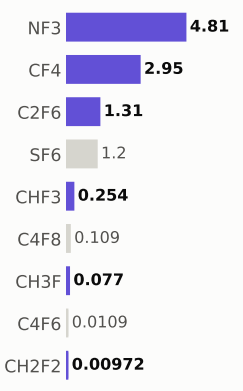

Step #5560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	551.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

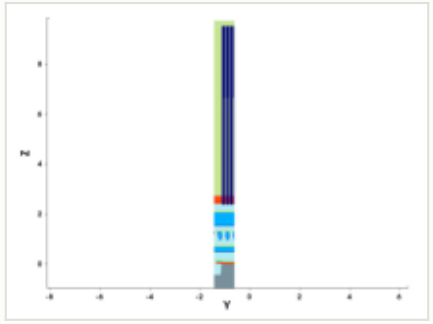

y cut at -1.035 µm

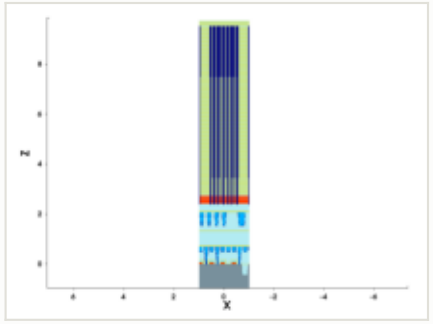

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

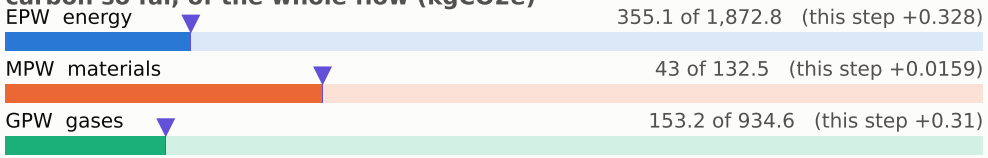

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

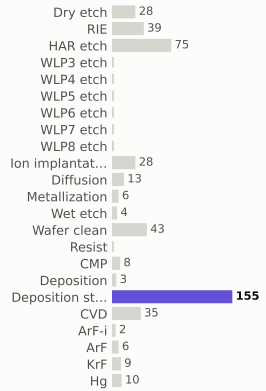

materials deposited (g)

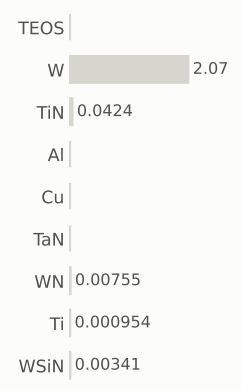

gases emitted (g)

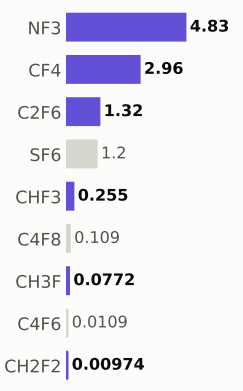

Step #5570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	552.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

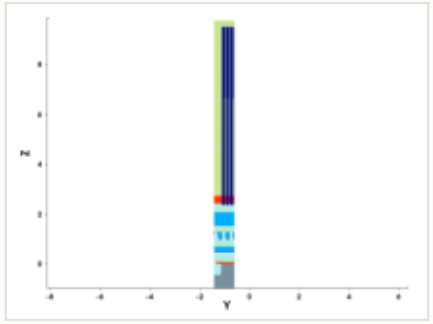

y cut at -1.035 µm

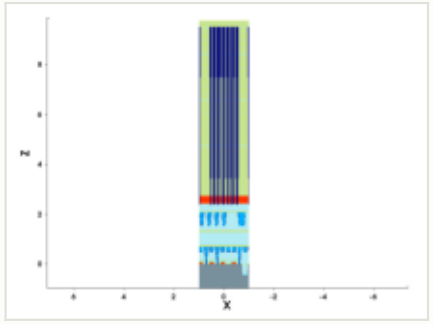

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

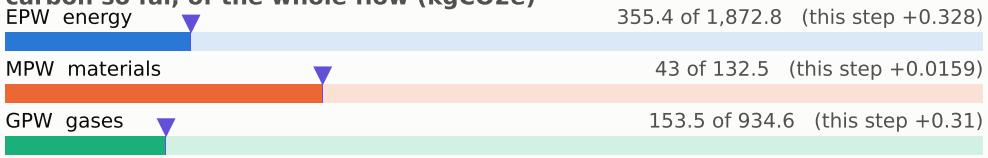

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

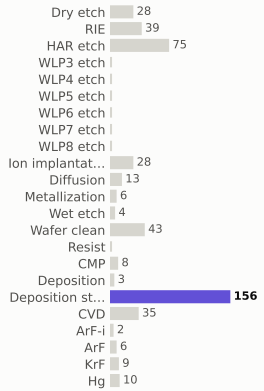

materials deposited (g)

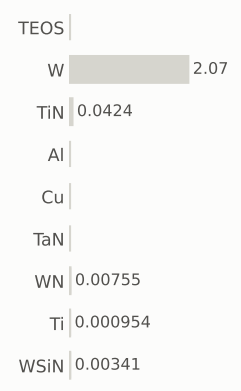

gases emitted (g)

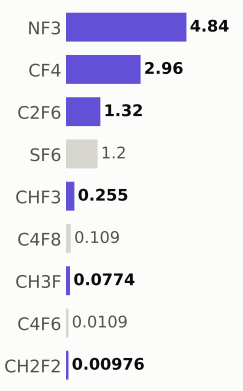

Step #5580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	552.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

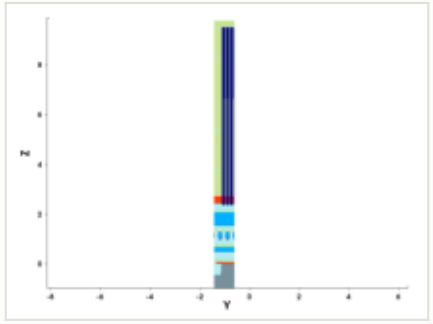

y cut at -1.035 µm

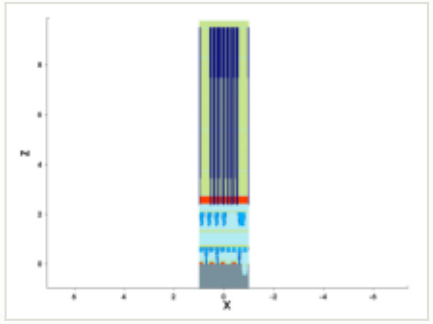

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

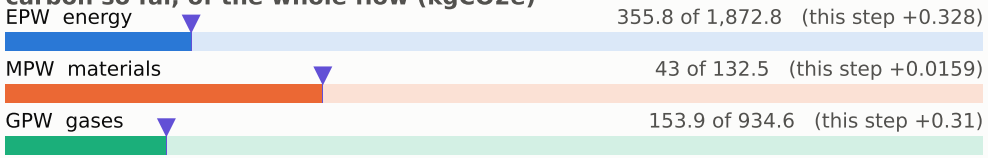

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

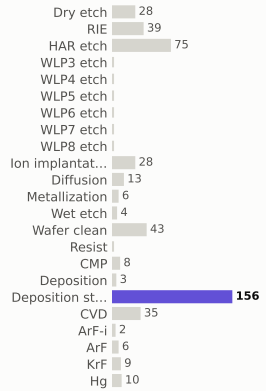

materials deposited (g)

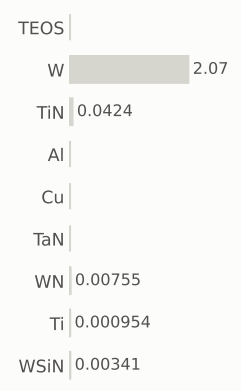

gases emitted (g)

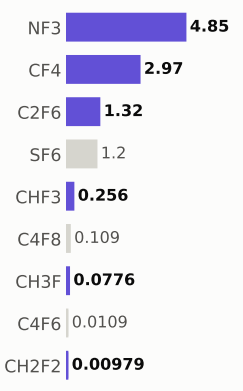

Step #5590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	553.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

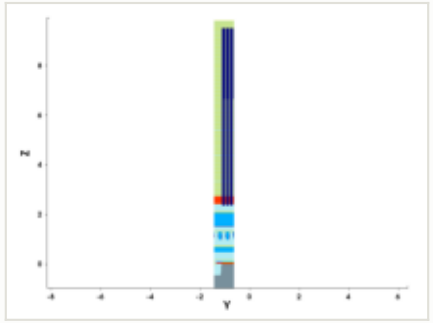

y cut at -1.035 µm

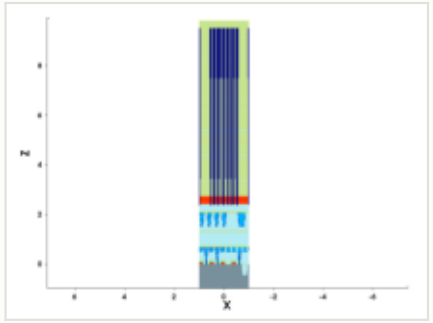

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

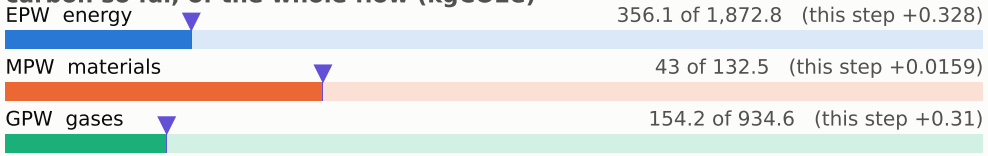

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

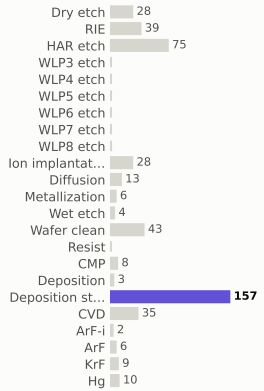

materials deposited (g)

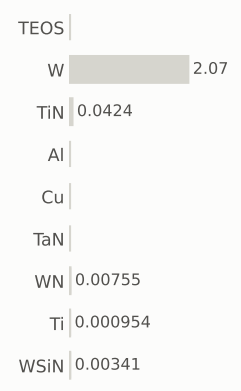

gases emitted (g)

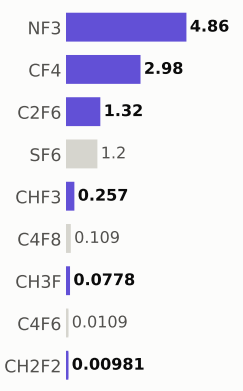

Step #5600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	553.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

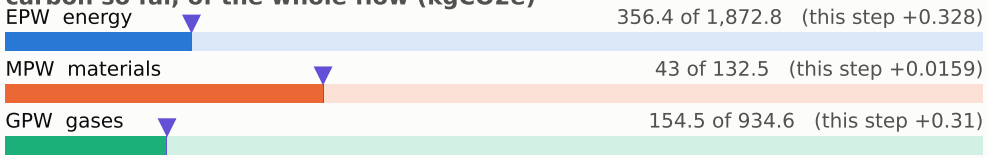

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

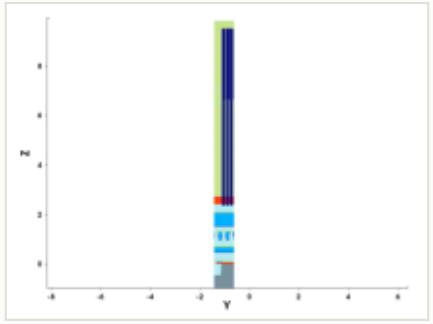

y cut at -1.035 µm

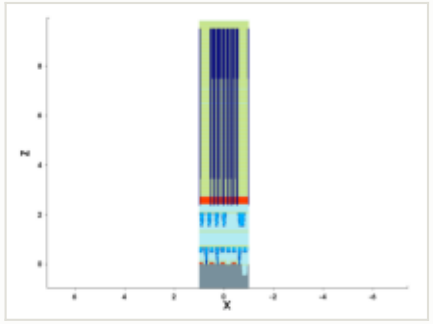

mask for this step

no mask for this step

steps by process area

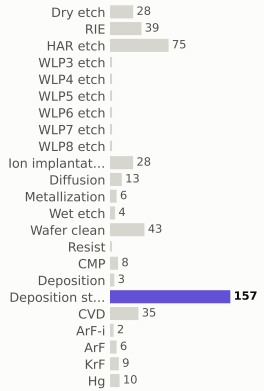

materials deposited (g)

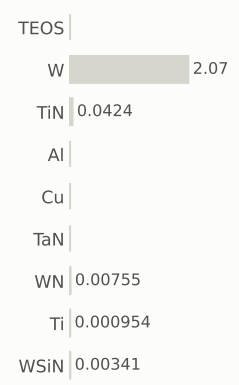

gases emitted (g)

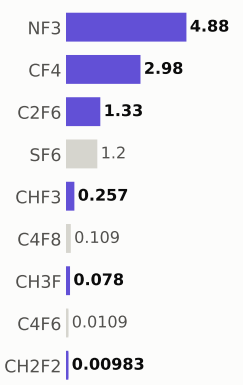

Step #5610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	554.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 356.7 of 1,872.8 (this step +0.328)

MPW materials — 43.1 of 132.5 (this step +0.0159)

GPW gases — 154.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

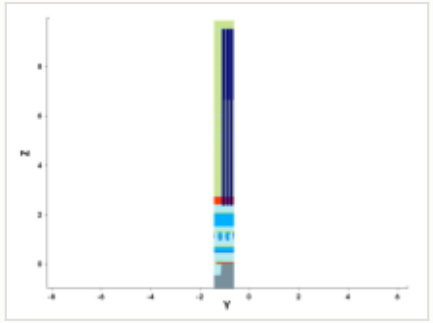

y cut at -1.035 µm

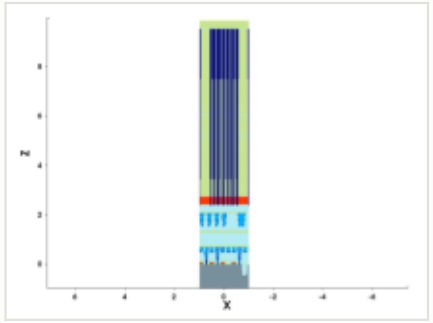

mask for this step

no mask for this step

steps by process area

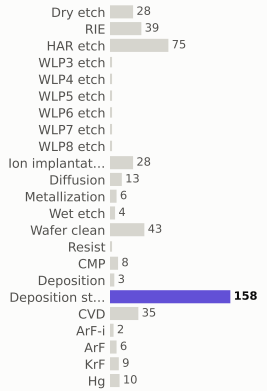

materials deposited (g)

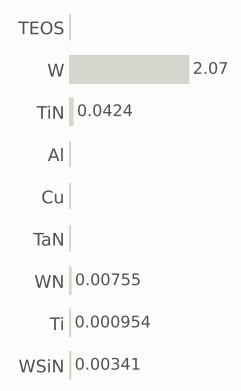

gases emitted (g)

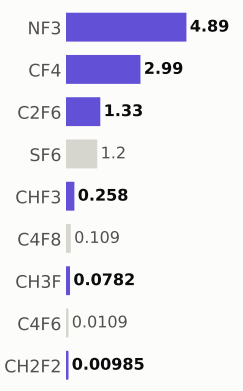

Step #5620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	555.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

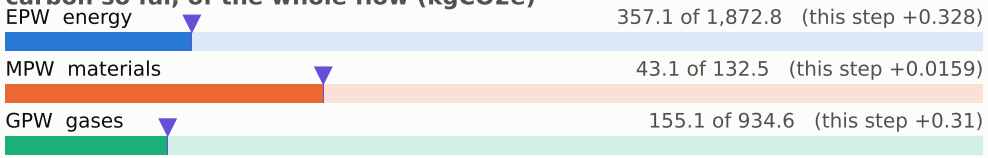

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

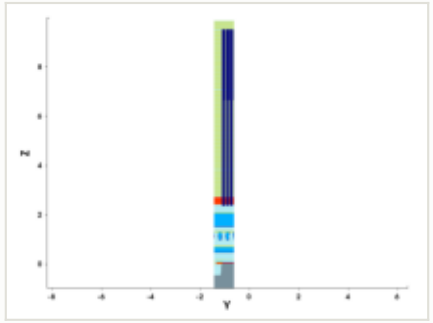

y cut at -1.035 µm

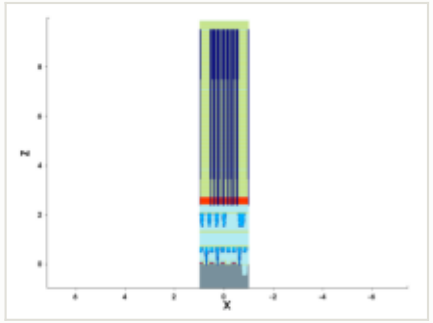

mask for this step

no mask for this step

steps by process area

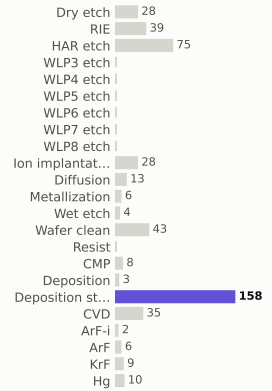

materials deposited (g)

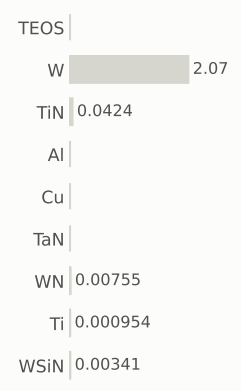

gases emitted (g)

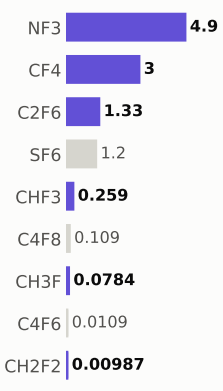

Step #5630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	555.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

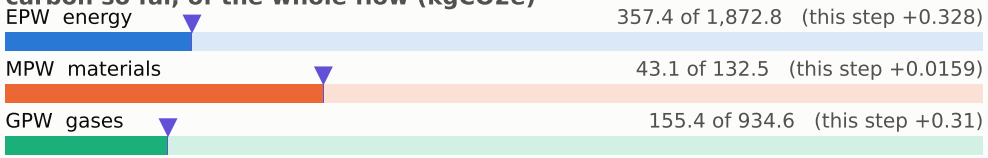

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

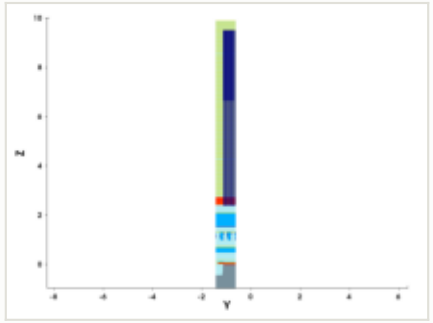

y cut at -1.035 µm

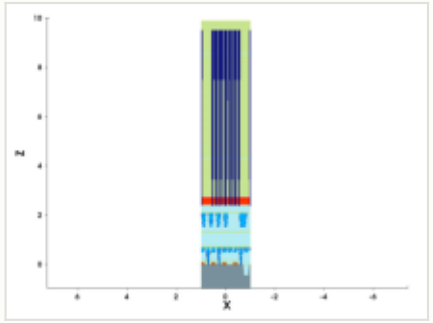

mask for this step

no mask for this step

steps by process area



materials deposited (g)

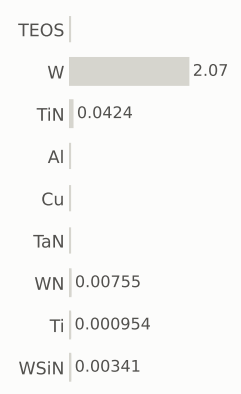

gases emitted (g)

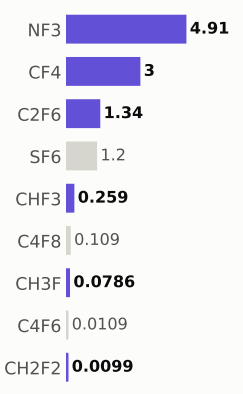

Step #5640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	556.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

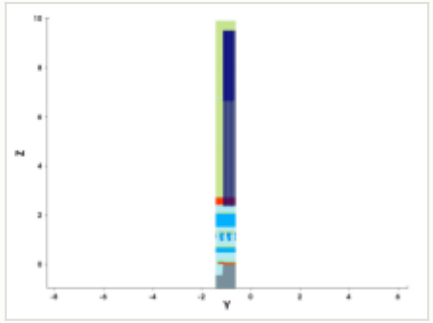

y cut at -1.035 µm

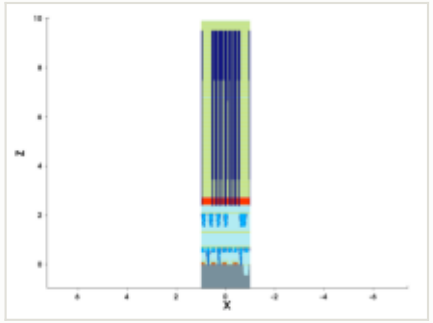

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

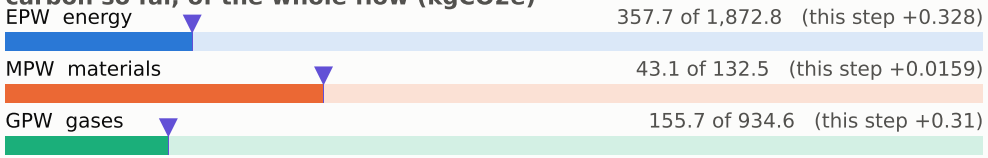

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

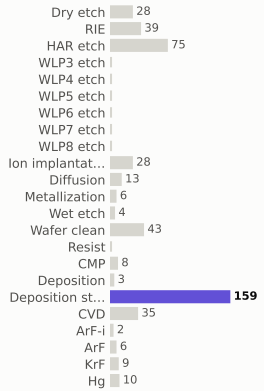

materials deposited (g)

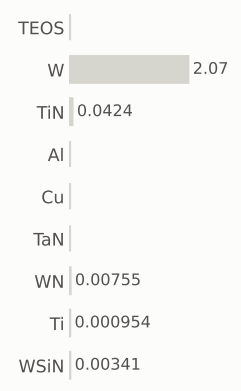

gases emitted (g)

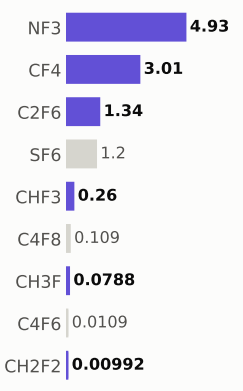

Step #5650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	557.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

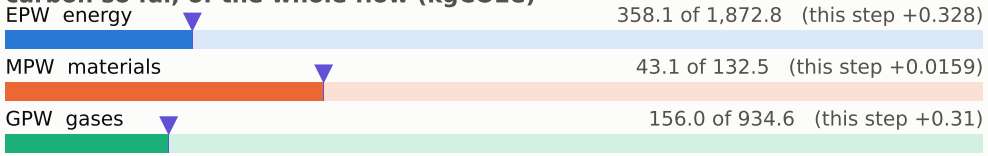

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

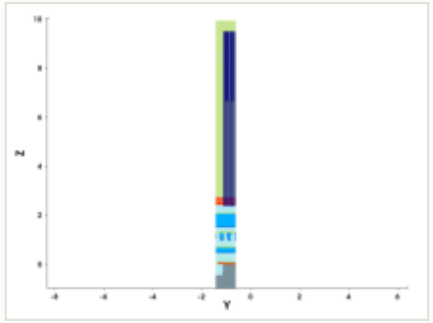

y cut at -1.035 µm

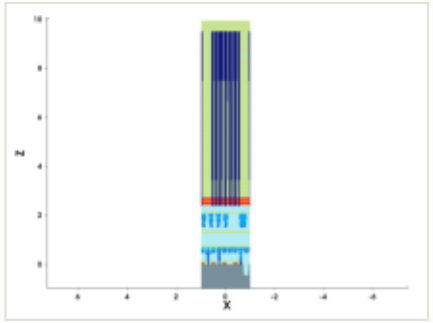

mask for this step

no mask for this step

steps by process area

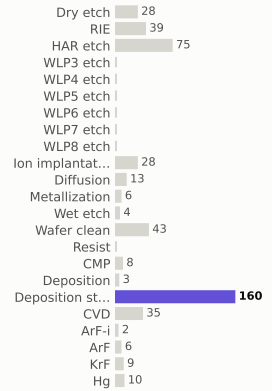

materials deposited (g)

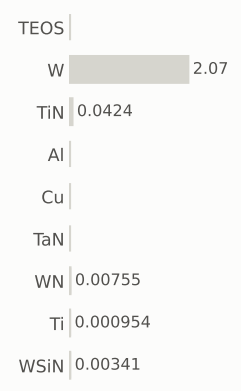

gases emitted (g)

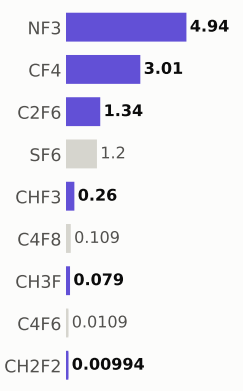

Step #5660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	557.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

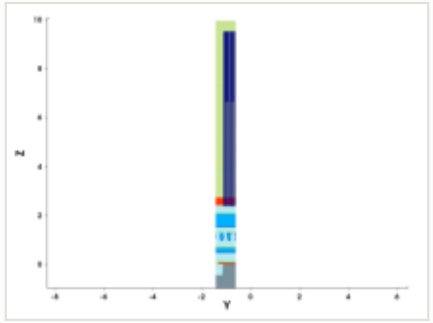

y cut at -1.035 µm

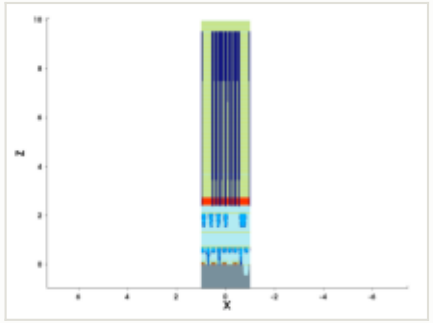

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

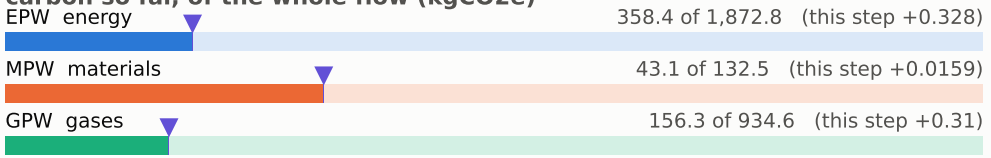

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

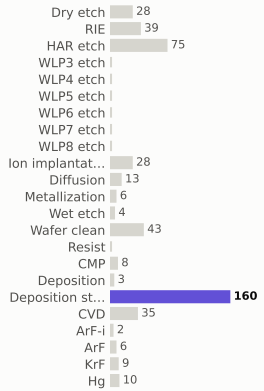

materials deposited (g)

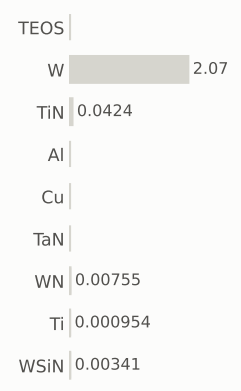

gases emitted (g)

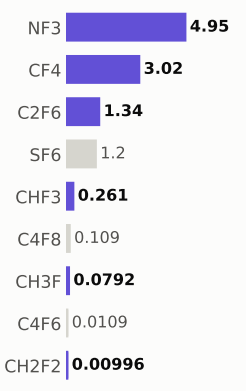

Step #5670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	558.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

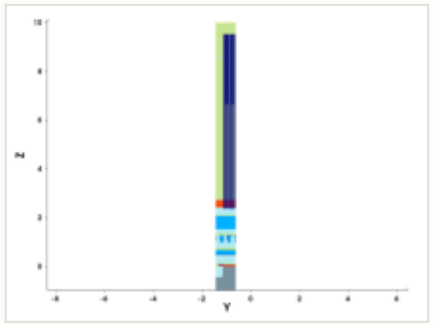

y cut at -1.035 µm

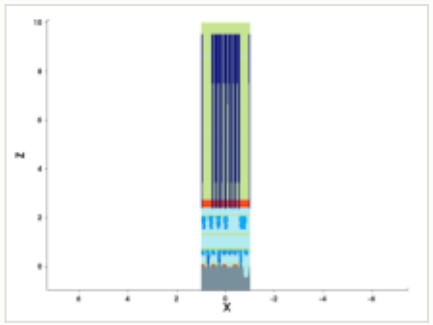

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

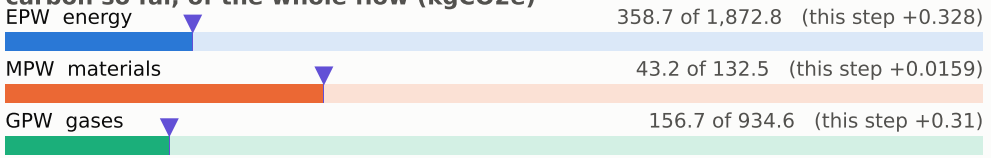

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

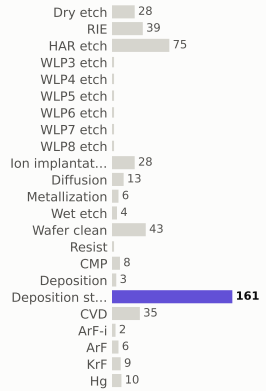

materials deposited (g)

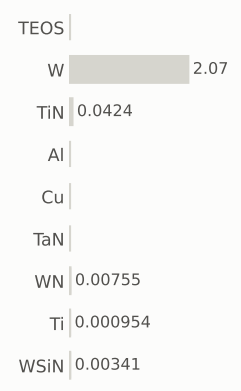

gases emitted (g)

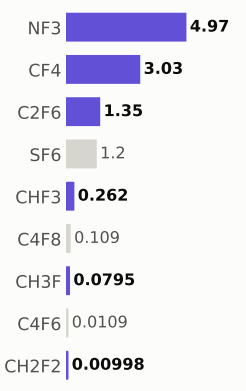

Step #5680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	559.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

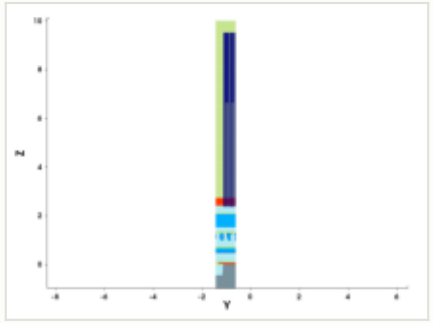

y cut at -1.035 µm

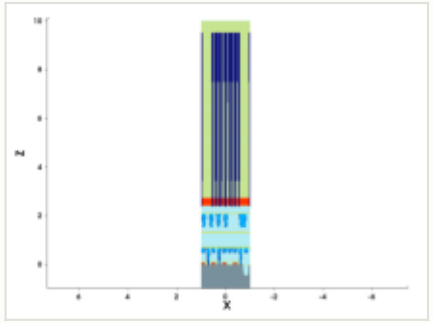

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

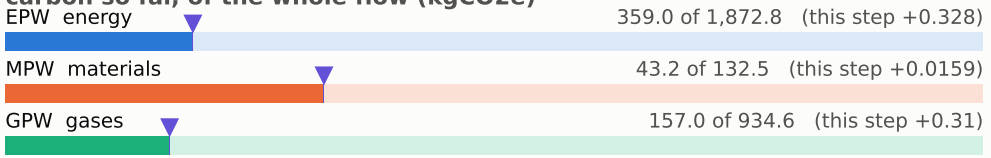

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

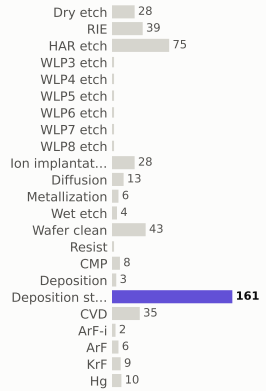

materials deposited (g)

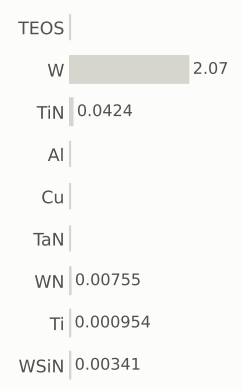

gases emitted (g)

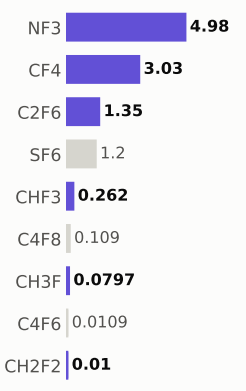

Step #5690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	559.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

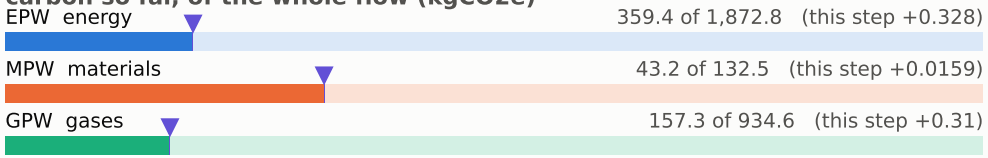

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

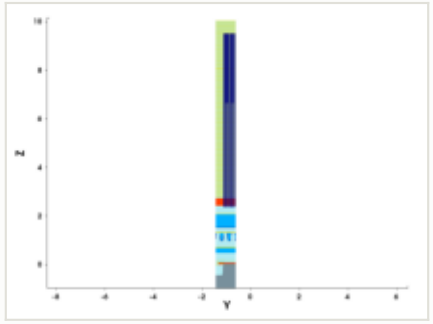

y cut at -1.035 µm

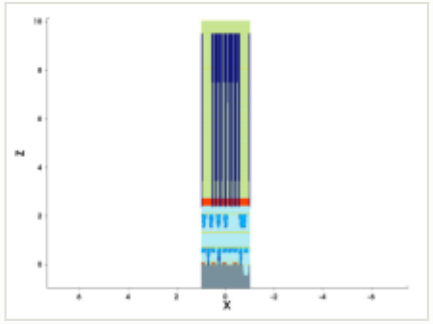

mask for this step

no mask for this step

steps by process area

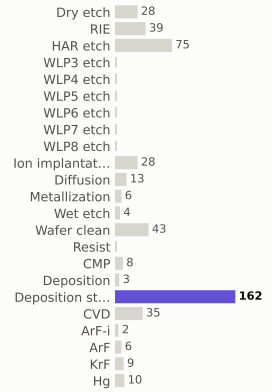

materials deposited (g)

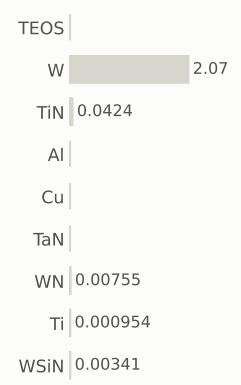

gases emitted (g)

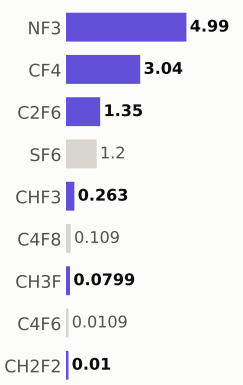

Step #5700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	560.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

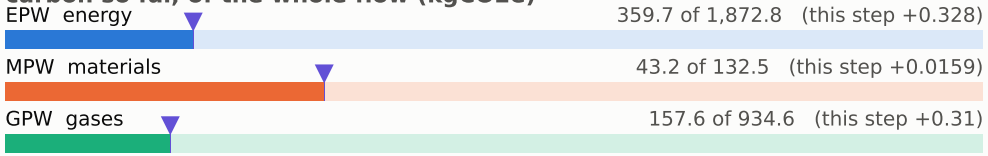

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

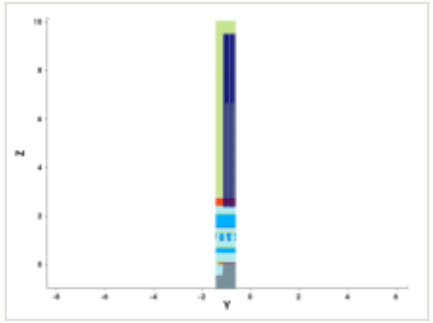

y cut at -1.035 µm

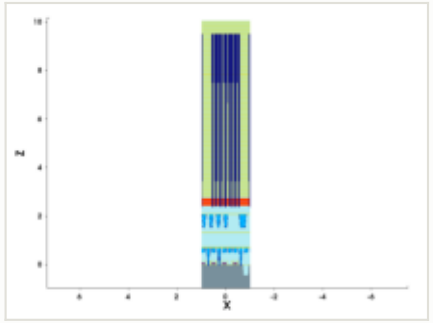

mask for this step

no mask for this step

steps by process area

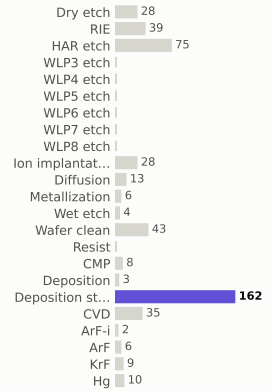

materials deposited (g)

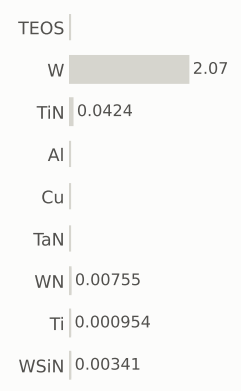

gases emitted (g)

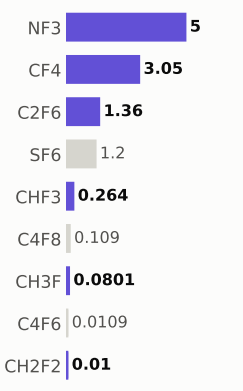

Step #5710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	561.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

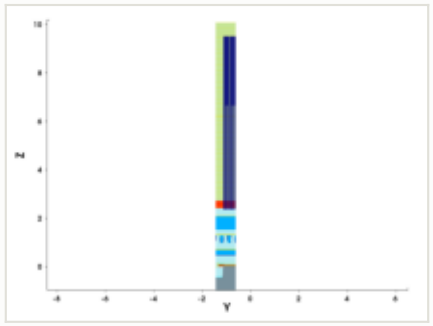

y cut at -1.035 µm

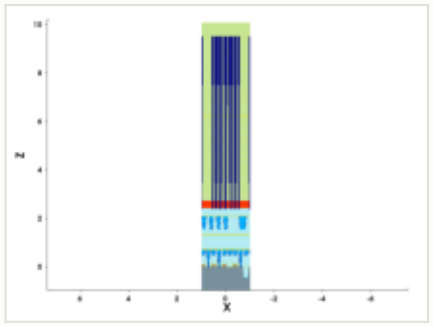

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

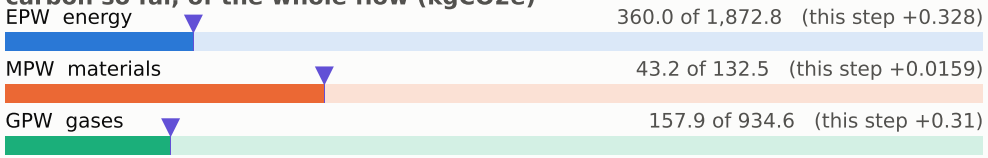

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

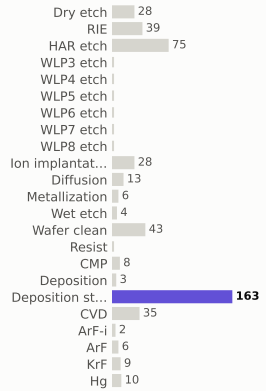

materials deposited (g)

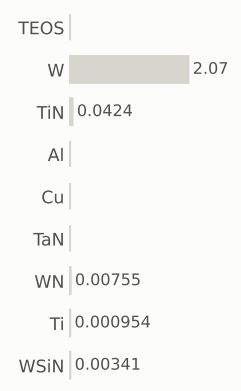

gases emitted (g)

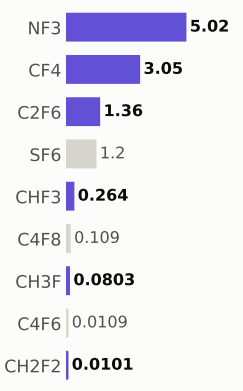

Step #5720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	561.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

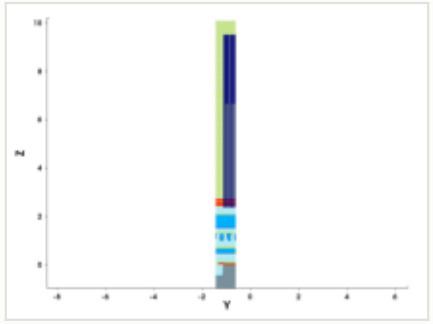

y cut at -1.035 µm

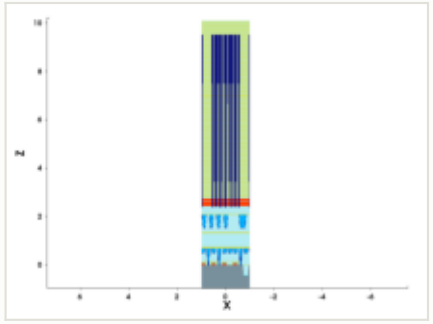

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 360.4 of 1,872.8 (this step +0.328)

MPW materials — 43.2 of 132.5 (this step +0.0159)

GPW gases — 158.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

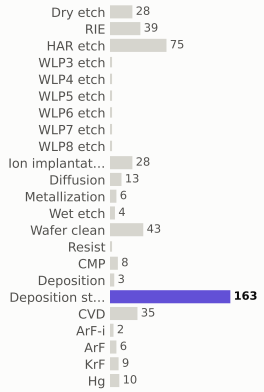

materials deposited (g)

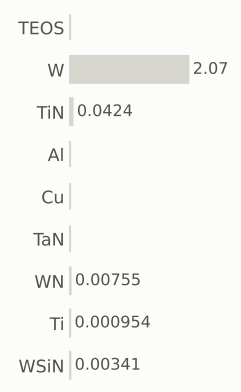

gases emitted (g)

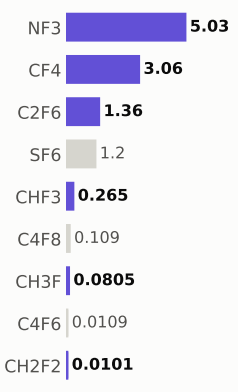

Step #5730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	562.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

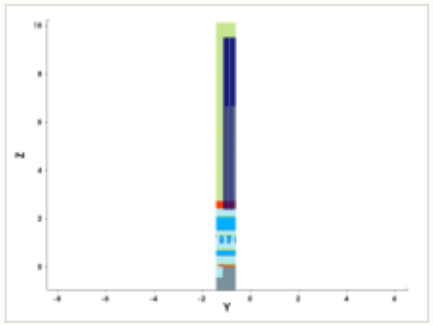

y cut at -1.035 µm

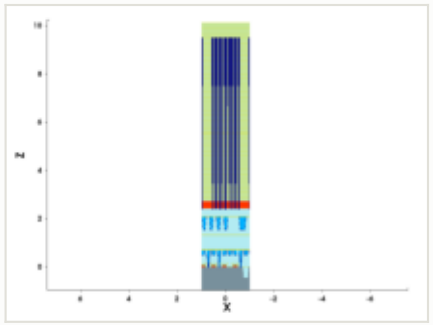

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

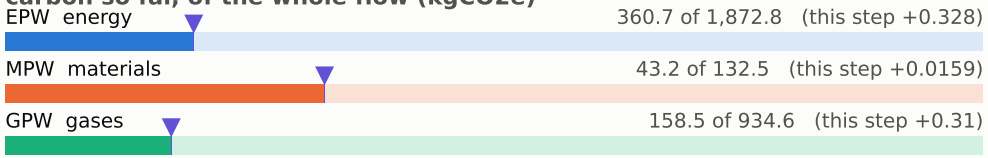

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

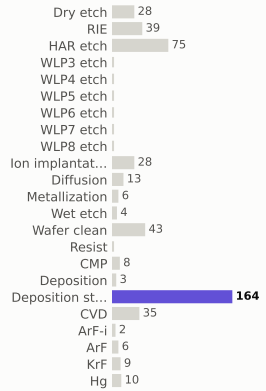

materials deposited (g)

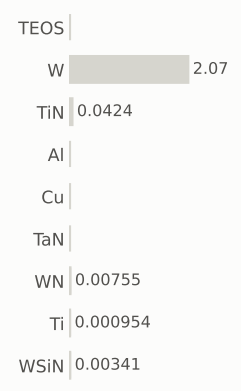

gases emitted (g)

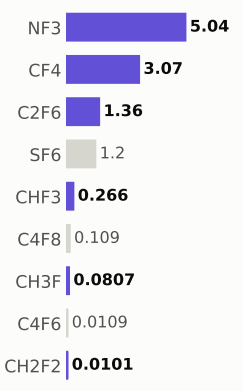

Step #5740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	563.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

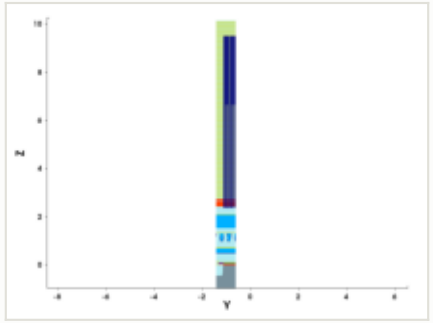

y cut at -1.035 µm

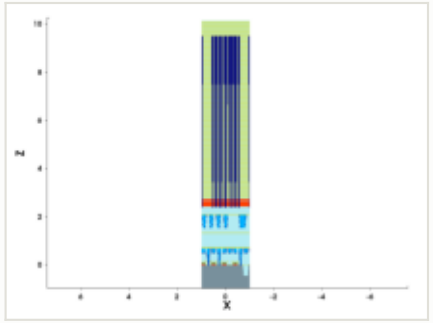

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

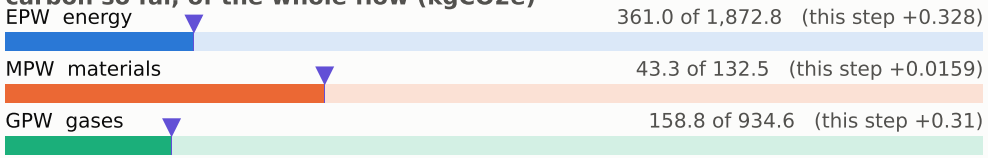

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

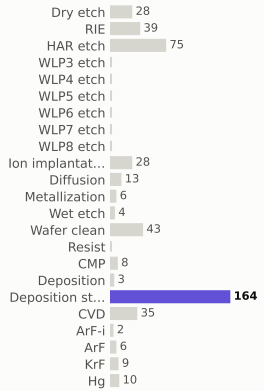

materials deposited (g)

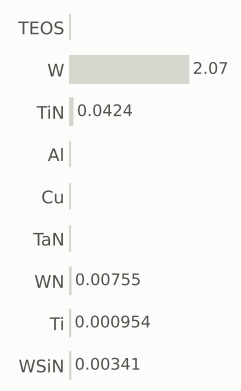

gases emitted (g)

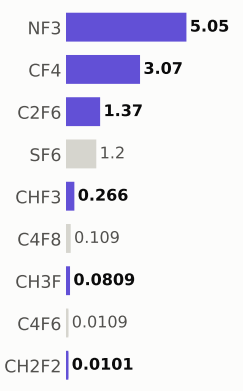

Step #5750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	563.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

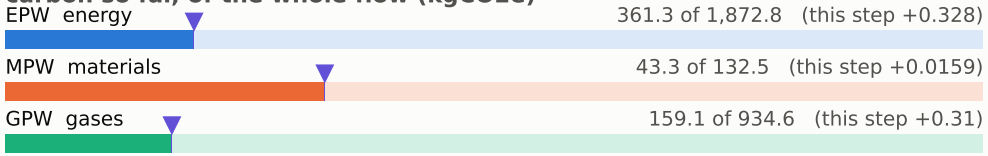

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

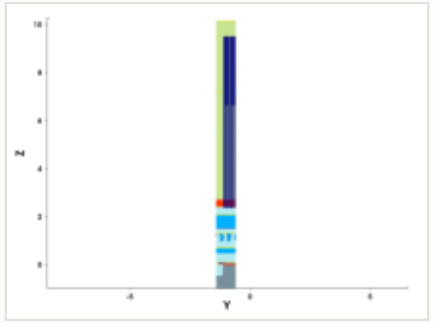

y cut at -1.035 µm

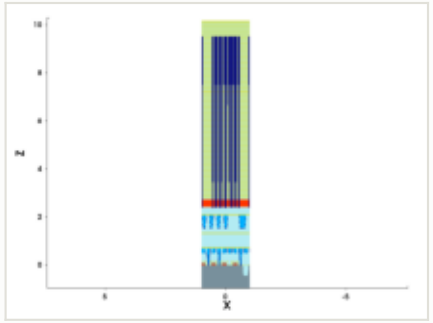

mask for this step

no mask for this step

steps by process area

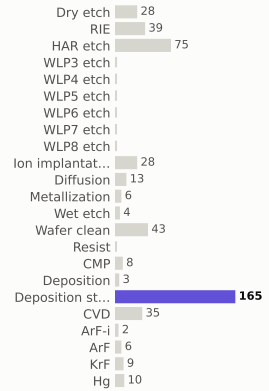

materials deposited (g)

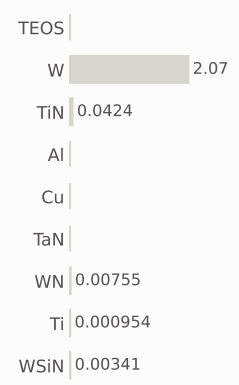

gases emitted (g)

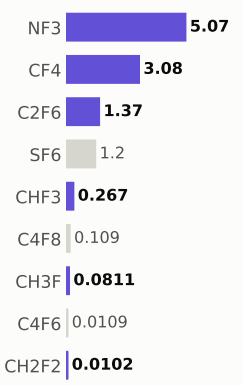

Step #5760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	564.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

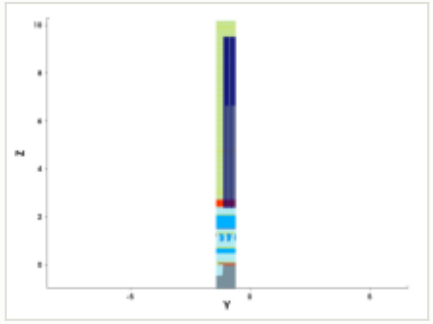

y cut at -1.035 µm

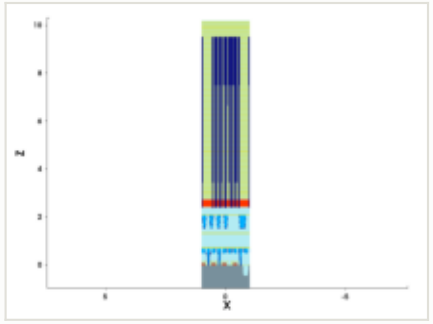

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 361.7 of 1,872.8 (this step +0.328)

MPW materials — 43.3 of 132.5 (this step +0.0159)

GPW gases — 159.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

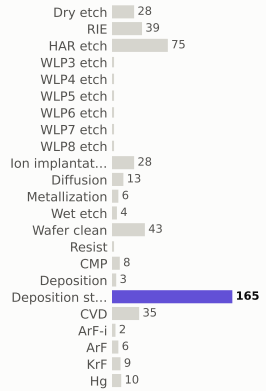

materials deposited (g)

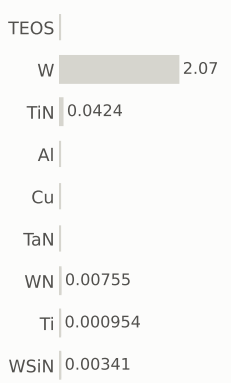

gases emitted (g)

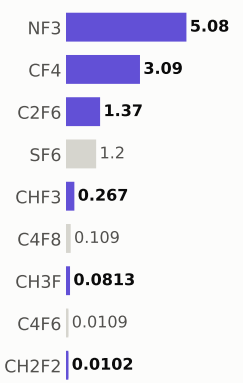

Step #5770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	565.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

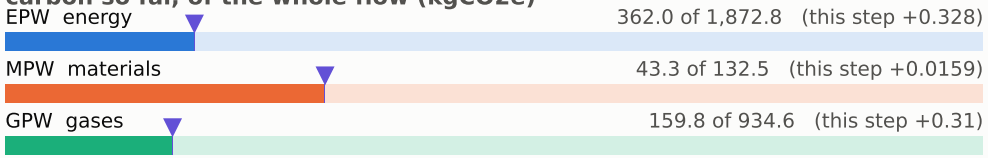

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

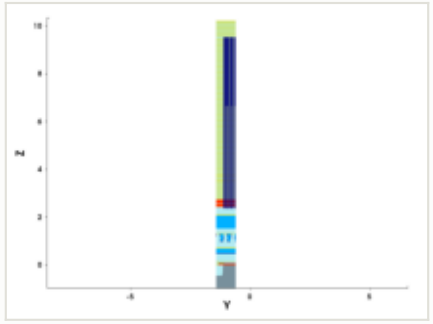

y cut at -1.035 µm

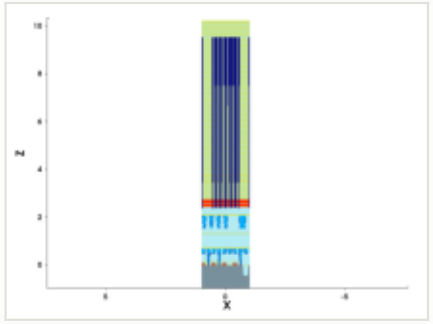

mask for this step

no mask for this step

steps by process area

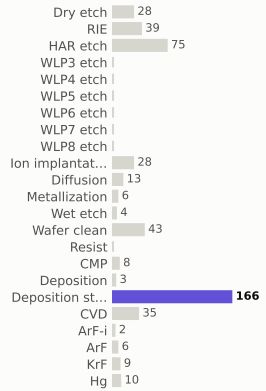

materials deposited (g)

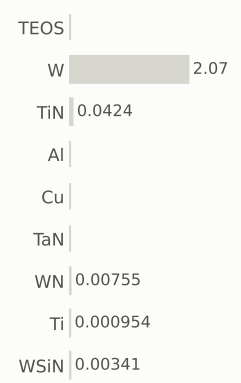

gases emitted (g)

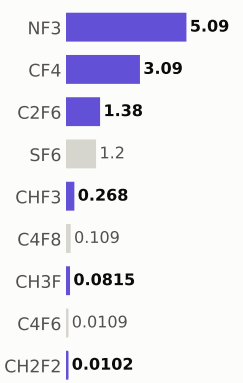

Step #5780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	565.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

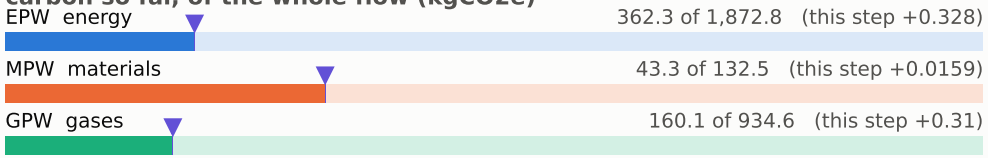

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

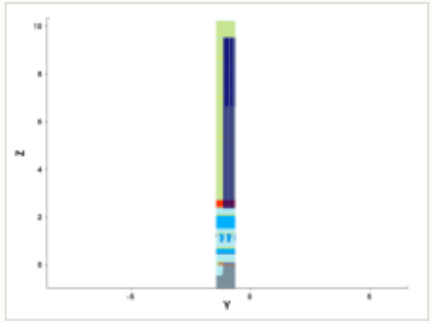

y cut at -1.035 µm

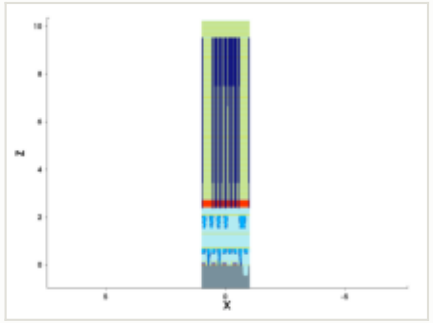

mask for this step

no mask for this step

steps by process area

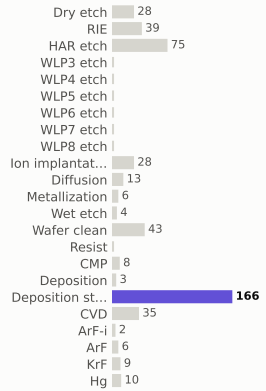

materials deposited (g)

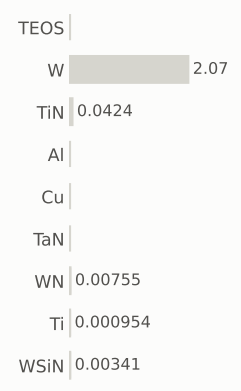

gases emitted (g)

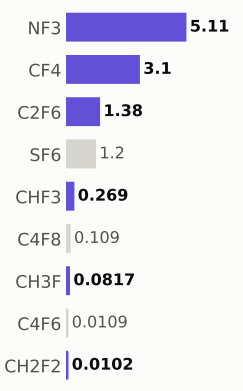

Step #5790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	566.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

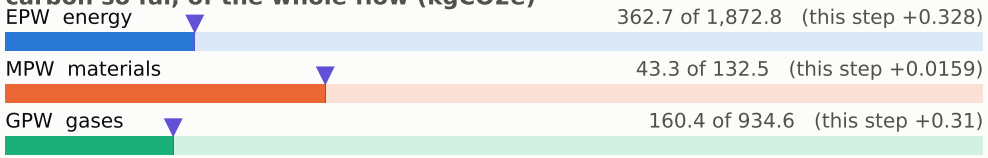

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

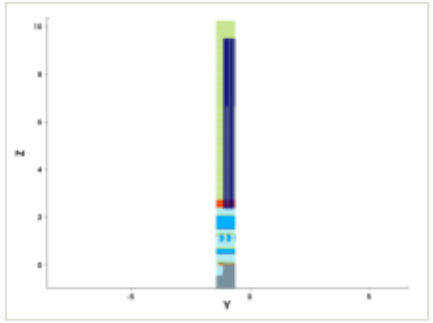

y cut at -1.035 µm

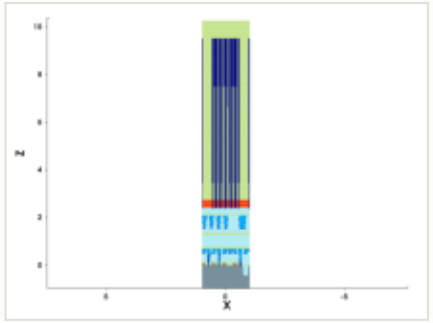

mask for this step

no mask for this step

steps by process area

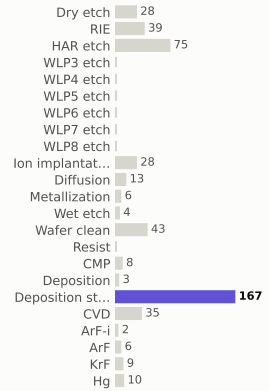

materials deposited (g)

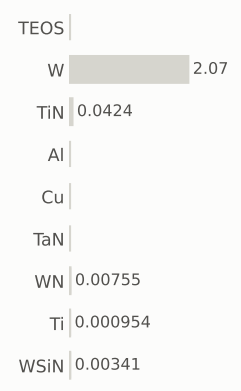

gases emitted (g)

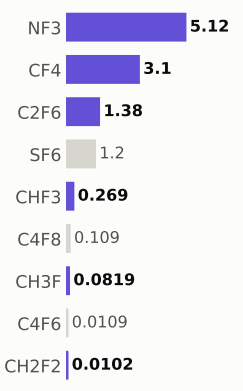

Step #5800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	567.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

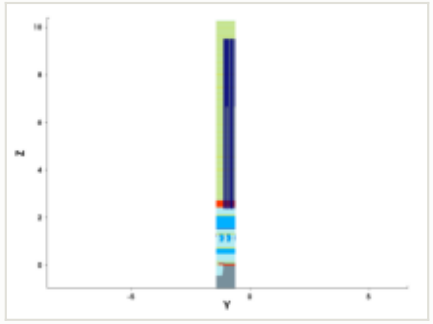

y cut at -1.035 µm

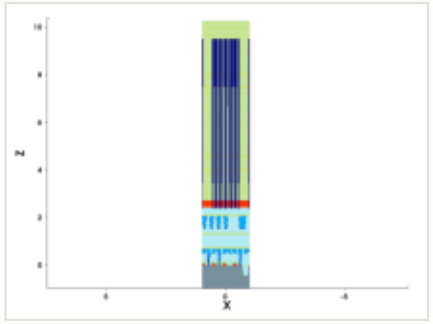

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

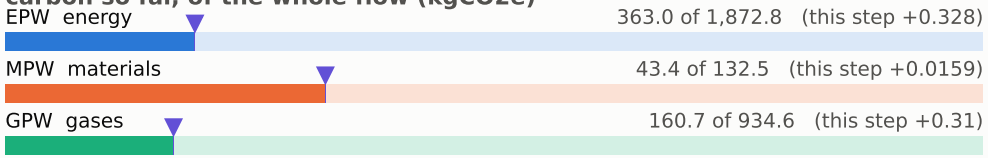

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

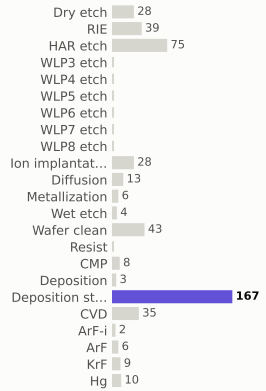

materials deposited (g)

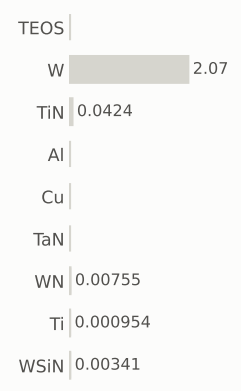

gases emitted (g)

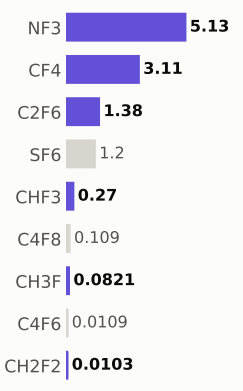

Step #5810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	567.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

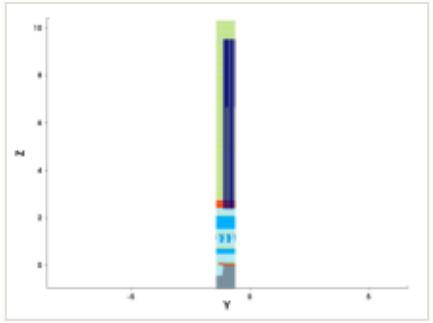

y cut at -1.035 µm

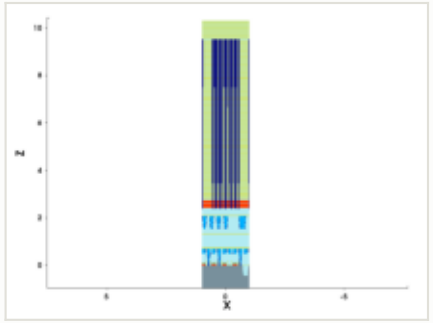

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 363.3 of 1,872.8 (this step +0.328)

MPW materials — 43.4 of 132.5 (this step +0.0159)

GPW gases — 161.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

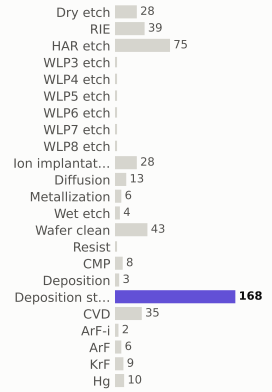

materials deposited (g)

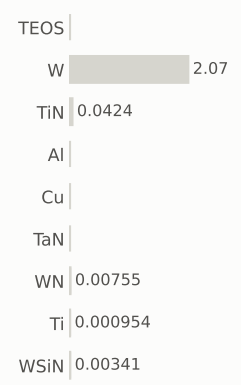

gases emitted (g)

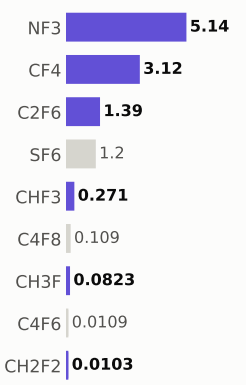

Step #5820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	568.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

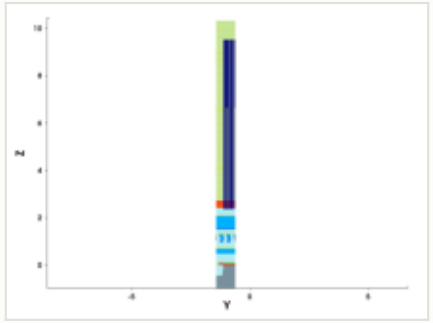

y cut at -1.035 µm

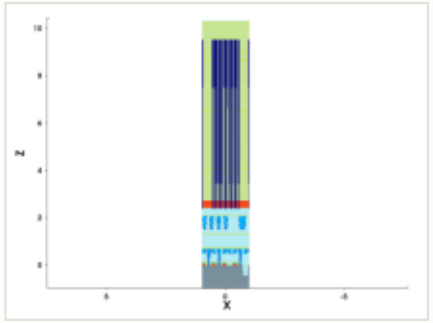

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 363.6 of 1,872.8 (this step +0.328)

MPW materials — 43.4 of 132.5 (this step +0.0159)

GPW gases — 161.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

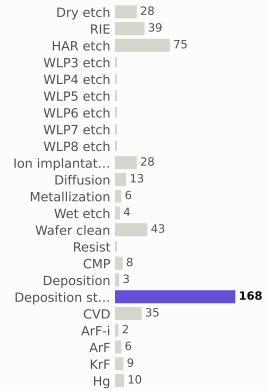

materials deposited (g)

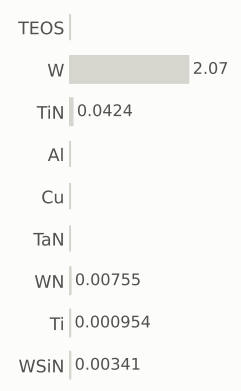

gases emitted (g)

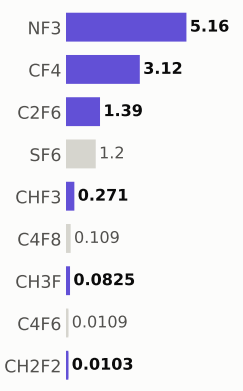

Step #5830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	569.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

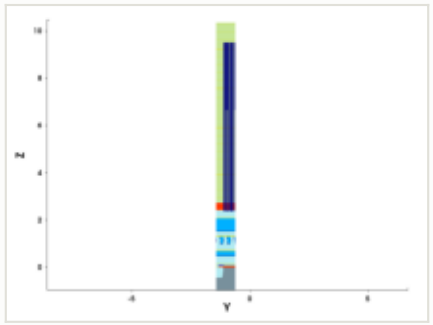

y cut at -1.035 µm

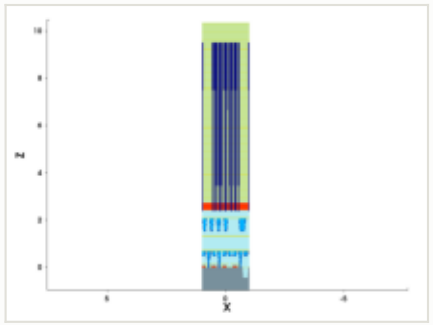

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

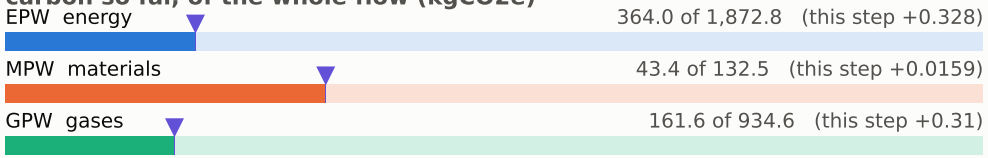

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

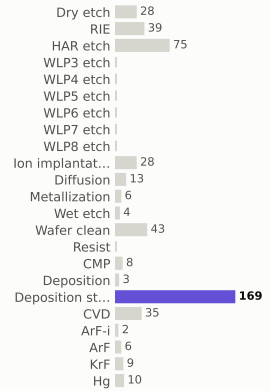

materials deposited (g)

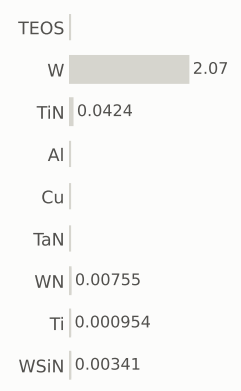

gases emitted (g)

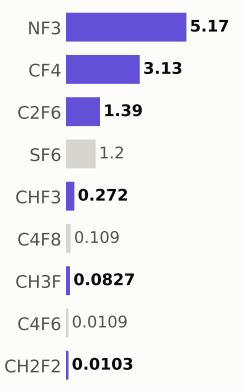

Step #5840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	569.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

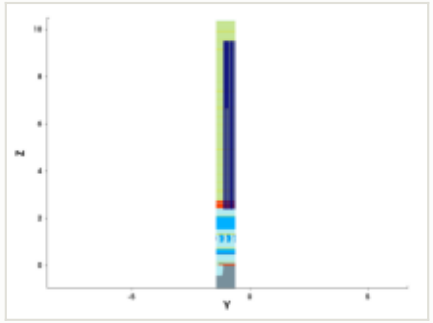

y cut at -1.035 µm

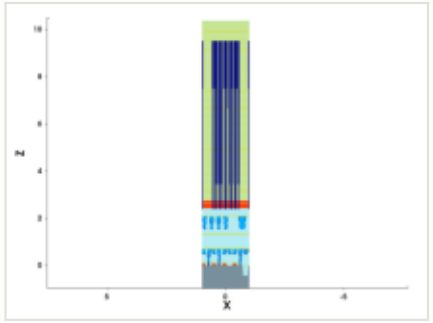

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

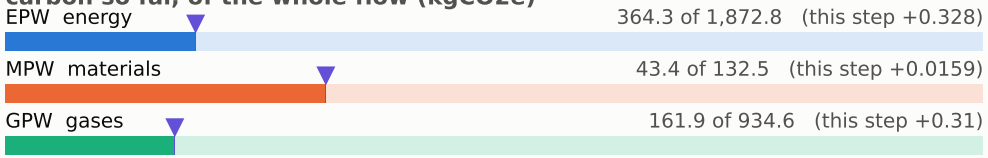

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

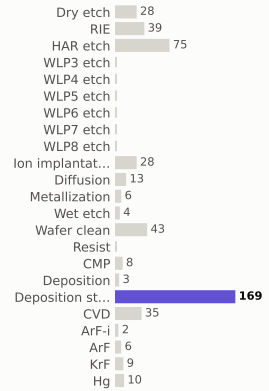

materials deposited (g)

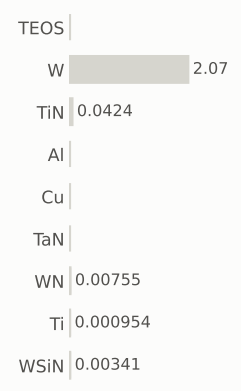

gases emitted (g)

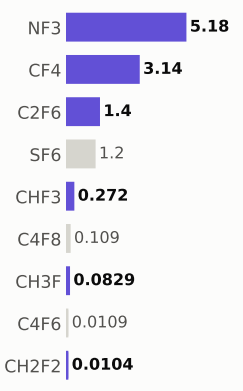

Step #5850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	570.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 364.6 of 1,872.8 (this step +0.328)

MPW materials — 43.4 of 132.5 (this step +0.0159)

GPW gases — 162.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

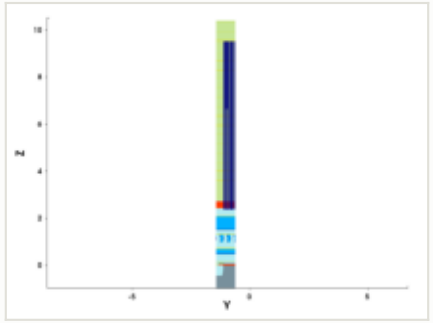

y cut at -1.035 µm

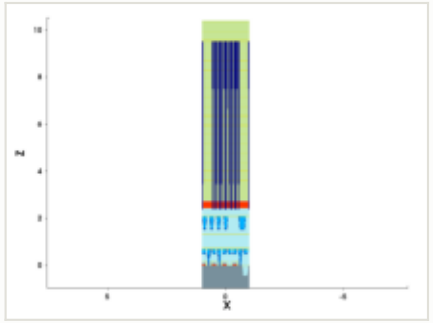

mask for this step

no mask for this step

steps by process area

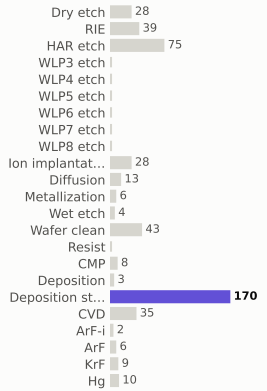

materials deposited (g)

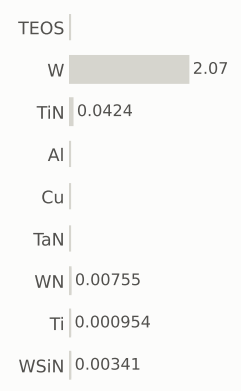

gases emitted (g)

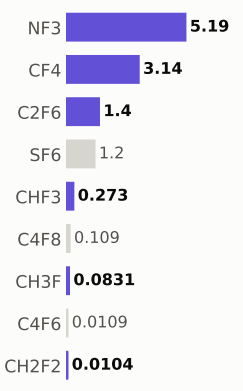

Step #5860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	570.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 365.0 of 1,872.8 (this step +0.328)

MPW materials — 43.5 of 132.5 (this step +0.0159)

GPW gases — 162.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

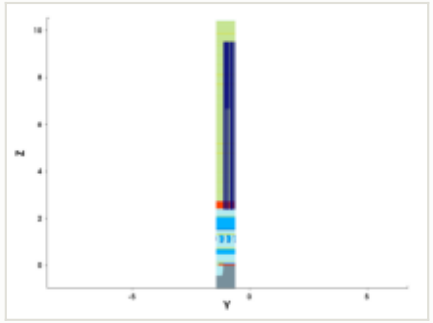

y cut at -1.035 µm

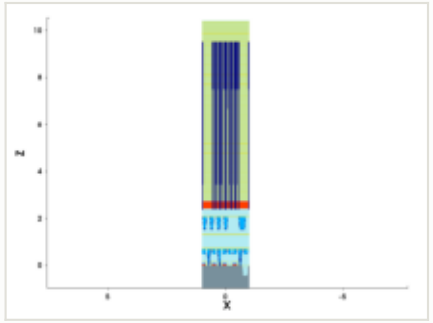

mask for this step

no mask for this step

steps by process area

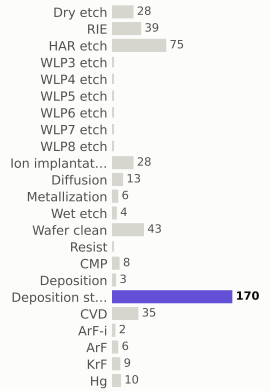

materials deposited (g)

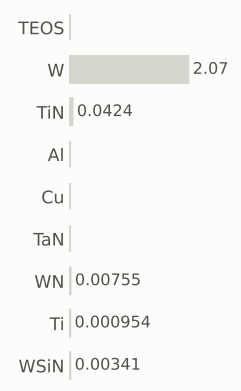

gases emitted (g)

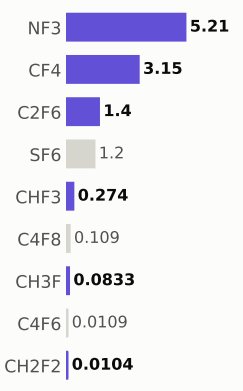

Step #5870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	571.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

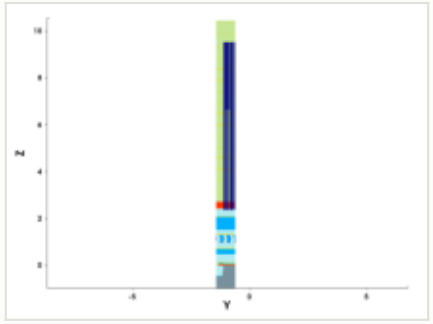

y cut at -1.035 µm

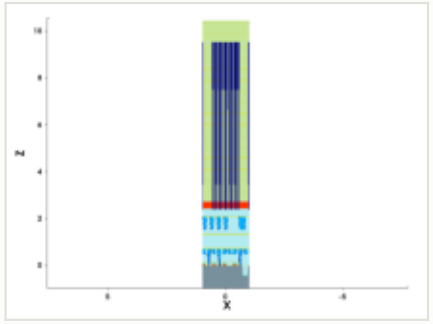

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

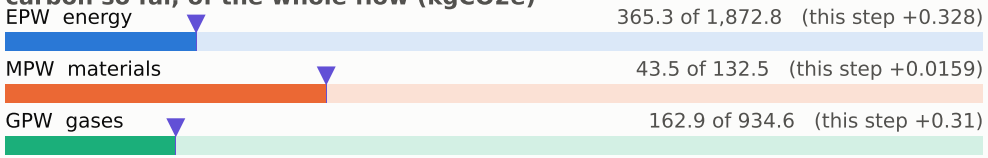

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

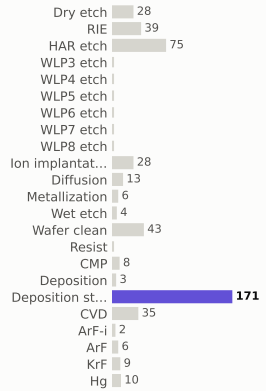

materials deposited (g)

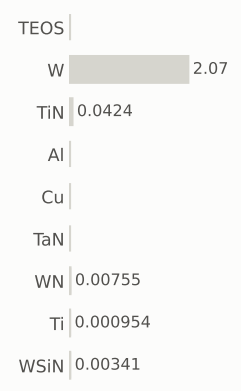

gases emitted (g)

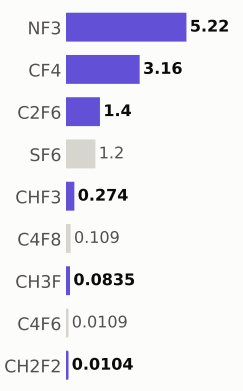

Step #5880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	572.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 365.6 of 1,872.8 (this step +0.328)

MPW materials — 43.5 of 132.5 (this step +0.0159)

GPW gases — 163.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

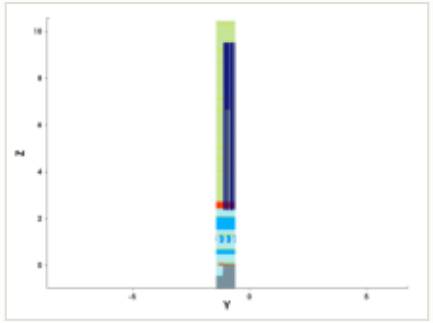

y cut at -1.035 µm

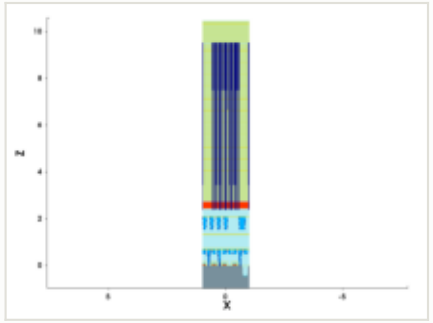

mask for this step

no mask for this step

steps by process area

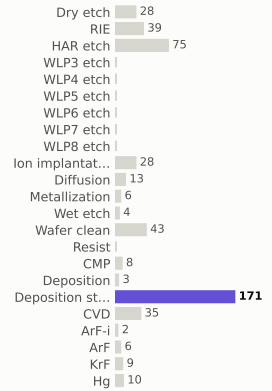

materials deposited (g)

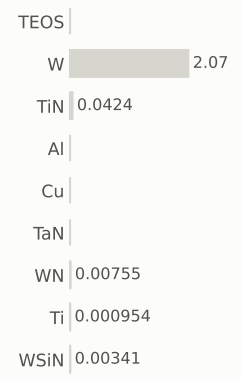

gases emitted (g)

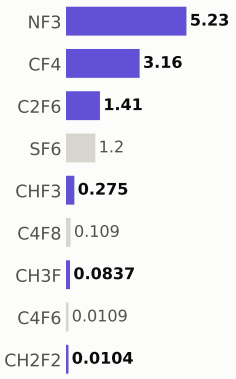

Step #5890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	572.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

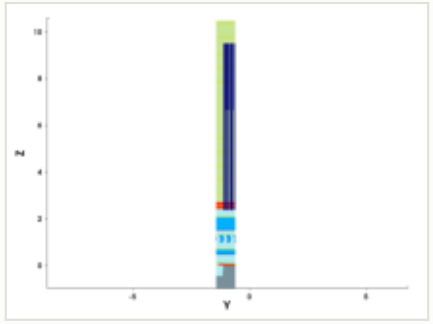

y cut at -1.035 µm

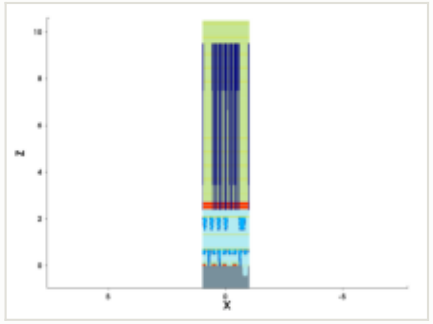

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

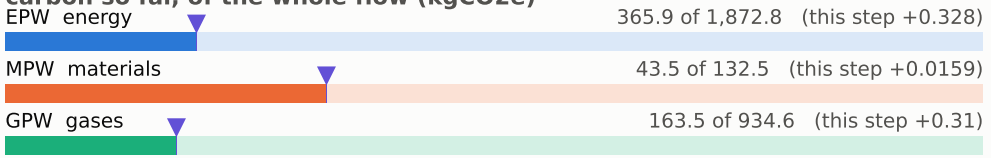

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

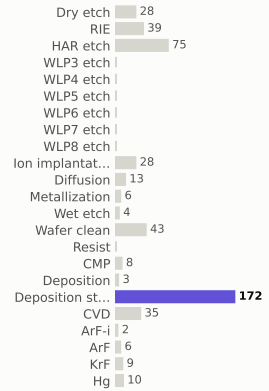

materials deposited (g)

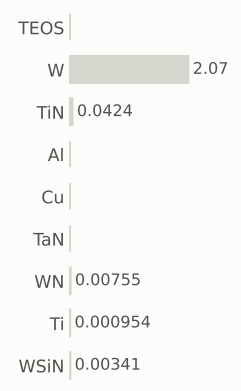

gases emitted (g)

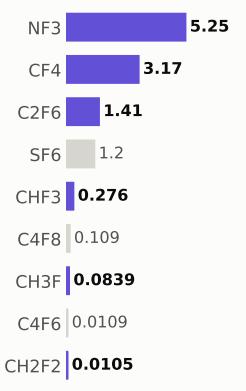

Step #5900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	573.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

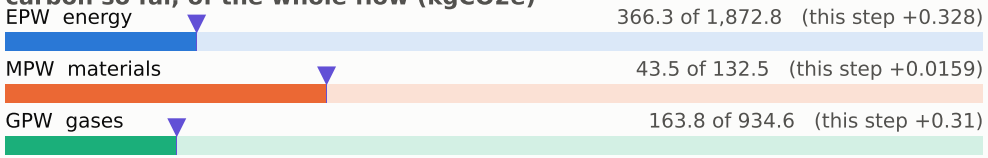

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

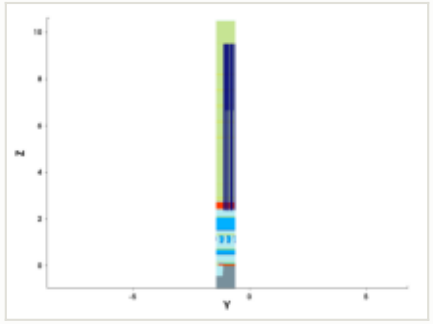

y cut at -1.035 µm

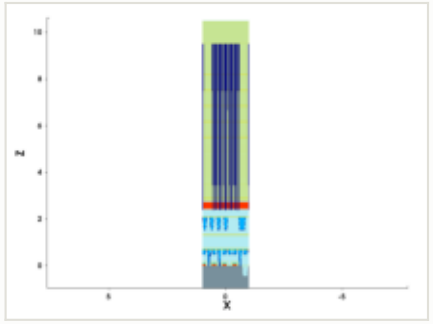

mask for this step

no mask for this step

steps by process area



materials deposited (g)

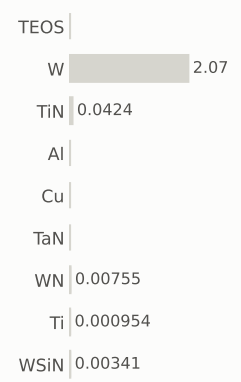

gases emitted (g)



Step #5910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	574.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

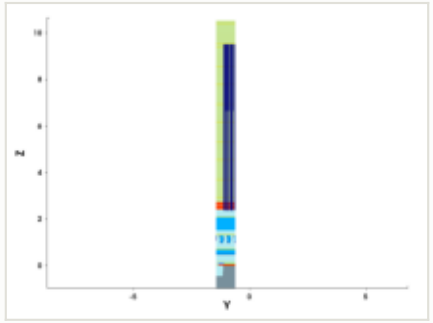

y cut at -1.035 µm

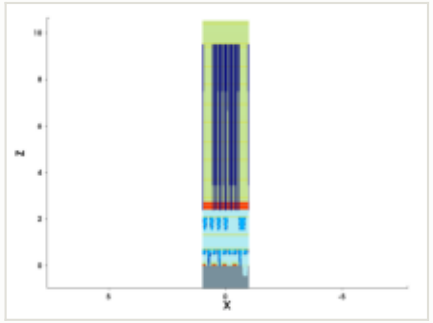

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

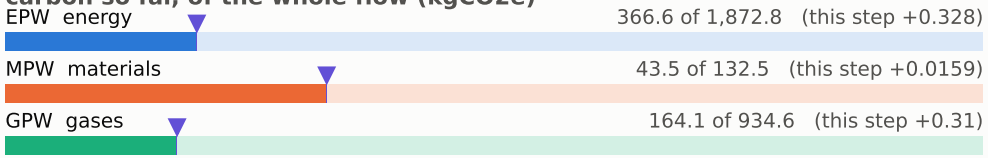

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

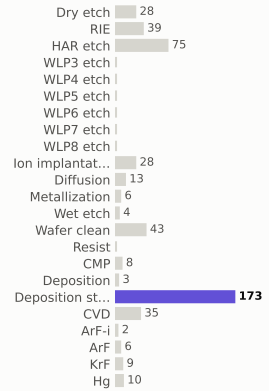

materials deposited (g)

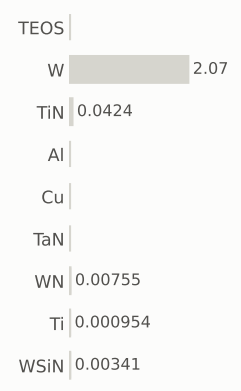

gases emitted (g)

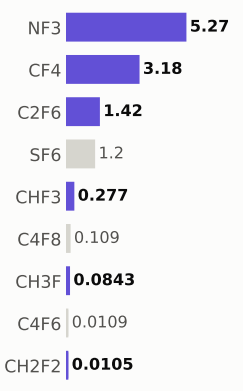

Step #5920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	574.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

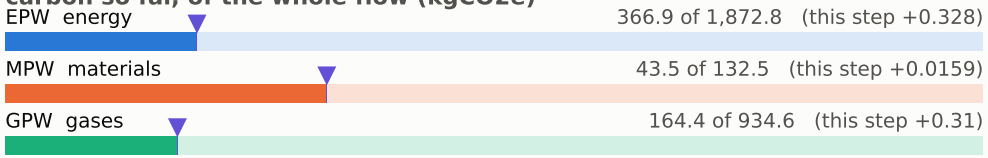

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

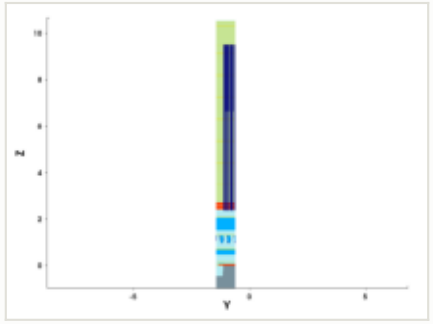

y cut at -1.035 µm

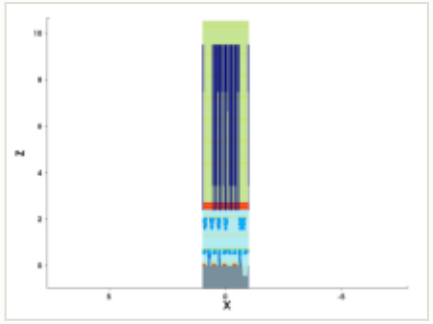

mask for this step

no mask for this step

steps by process area

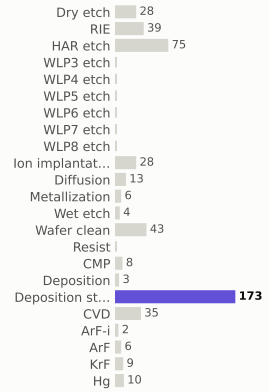

materials deposited (g)

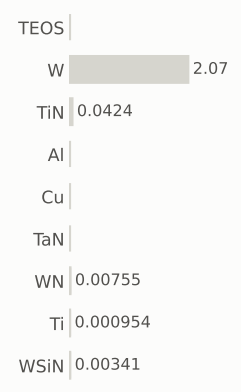

gases emitted (g)

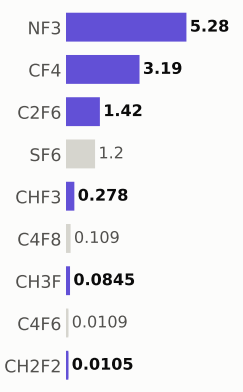

Step #5930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	575.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

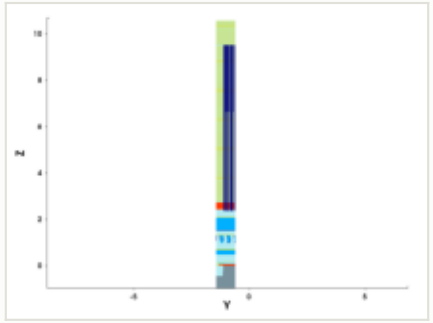

y cut at -1.035 µm

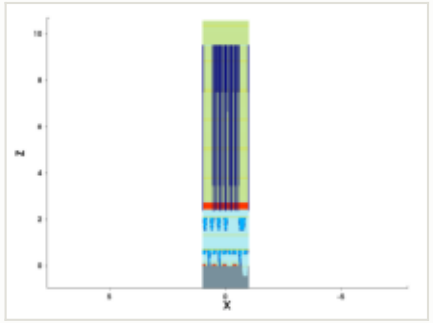

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

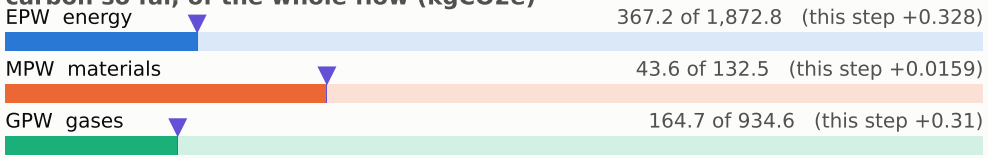

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

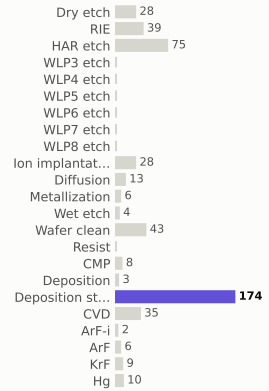

materials deposited (g)

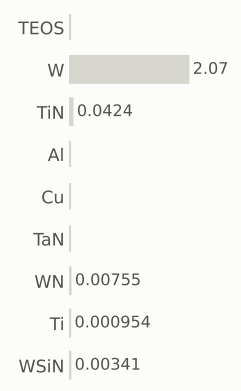

gases emitted (g)

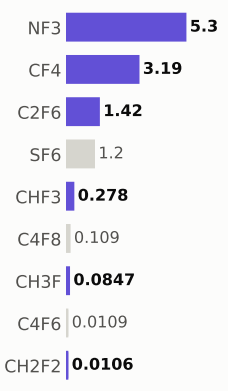

Step #5940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	576.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

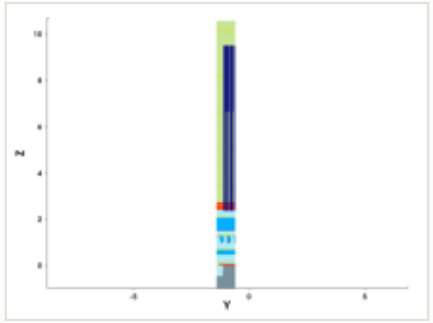

y cut at -1.035 µm

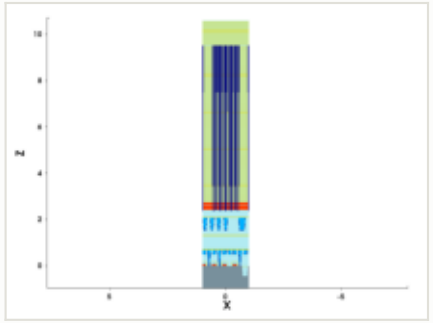

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

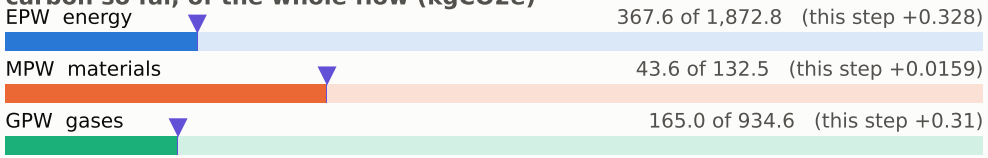

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

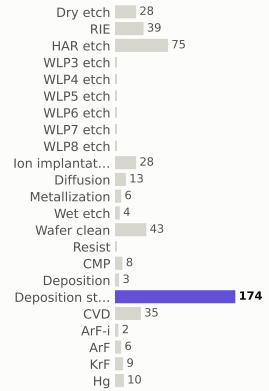

materials deposited (g)

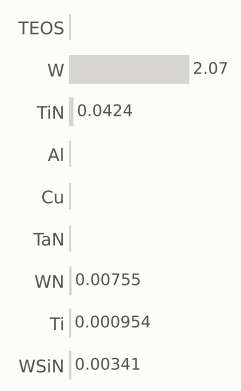

gases emitted (g)

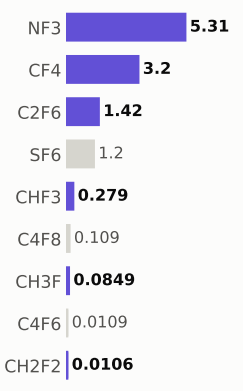

Step #5950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	576.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

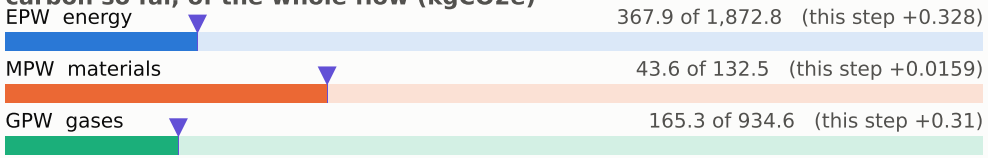

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

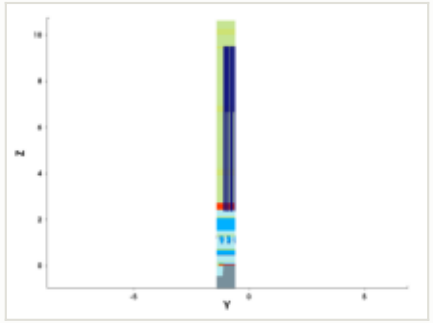

y cut at -1.035 µm

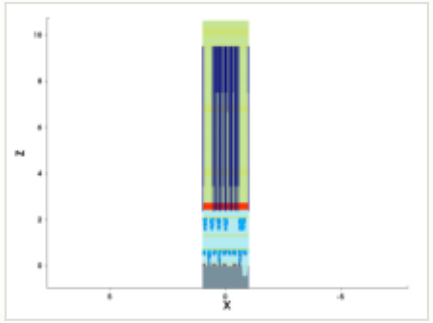

mask for this step

no mask for this step

steps by process area

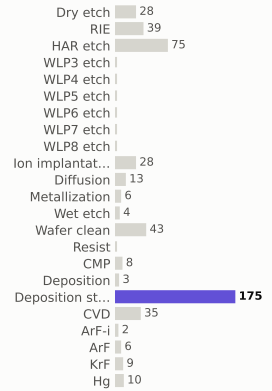

materials deposited (g)

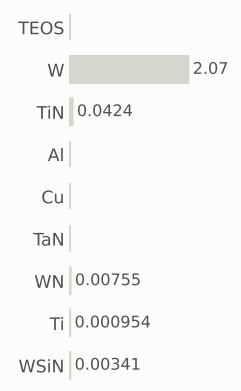

gases emitted (g)

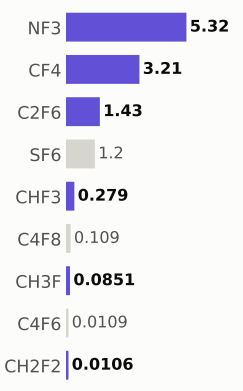

Step #5960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	577.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

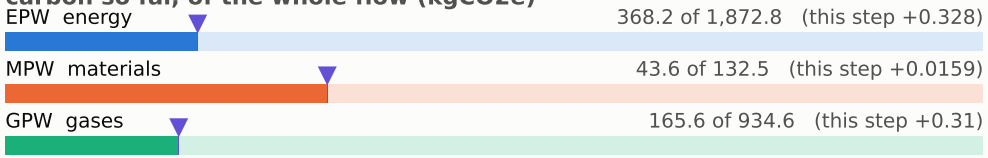

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

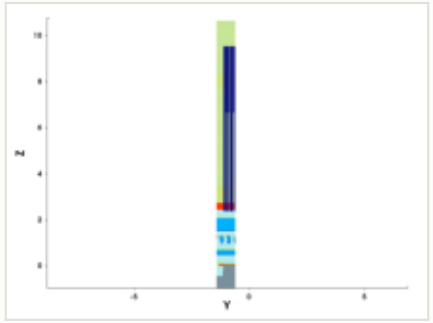

y cut at -1.035 µm

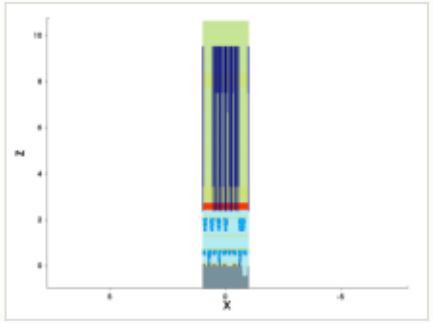

mask for this step

no mask for this step

steps by process area

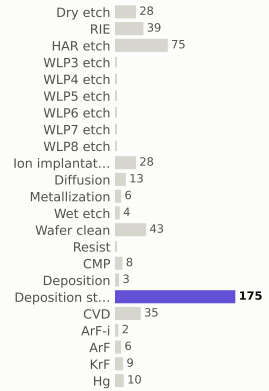

materials deposited (g)

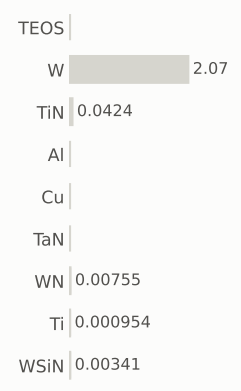

gases emitted (g)



Step #5970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	578.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

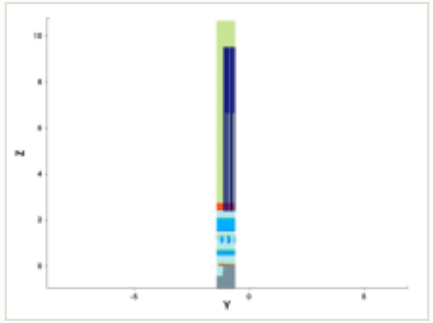

y cut at -1.035 µm

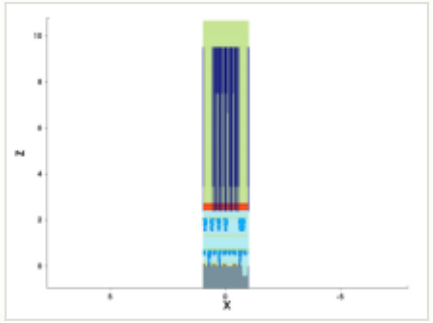

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

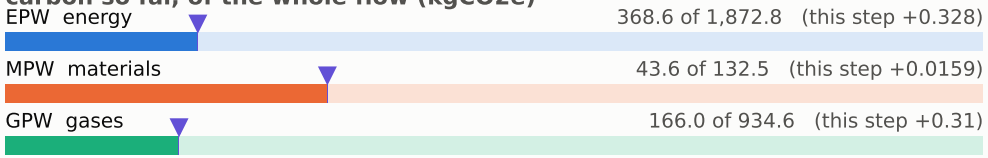

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

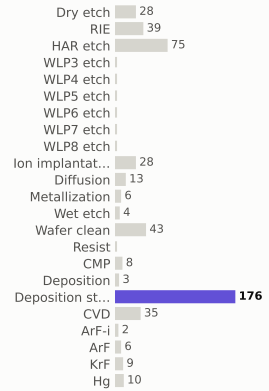

materials deposited (g)

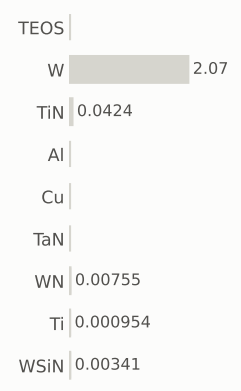

gases emitted (g)

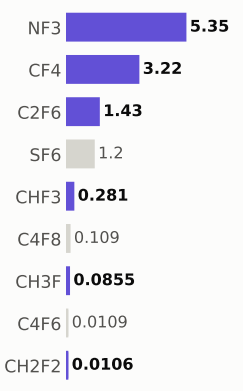

Step #5980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	578.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

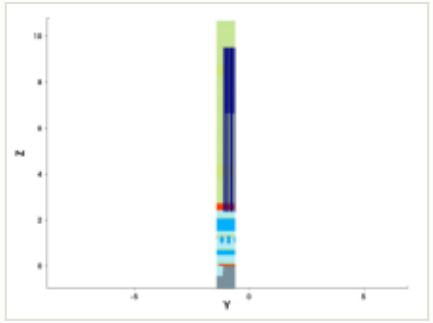

y cut at -1.035 µm

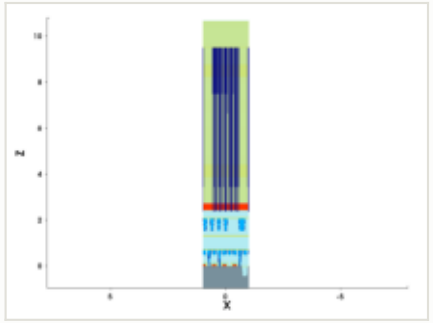

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

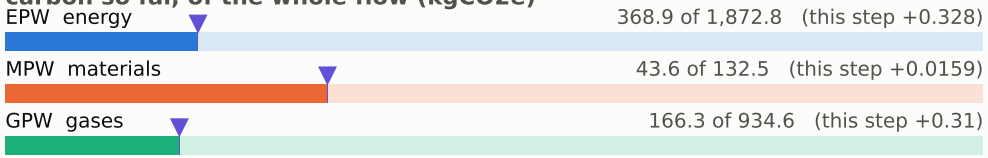

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

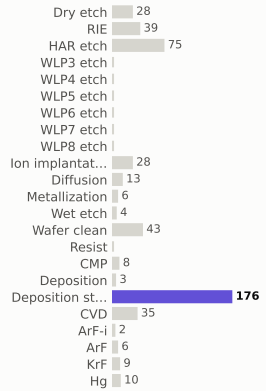

materials deposited (g)

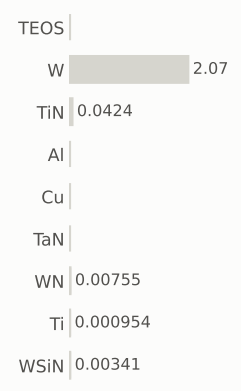

gases emitted (g)

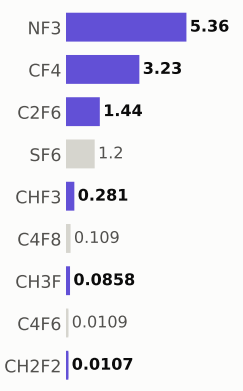

Step #5990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	579.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

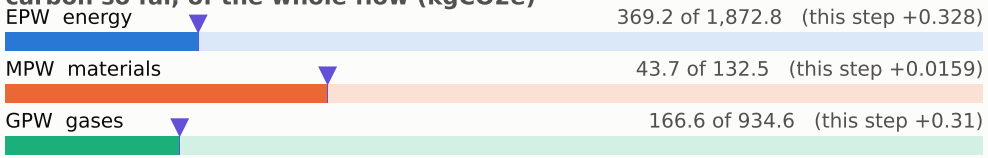

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

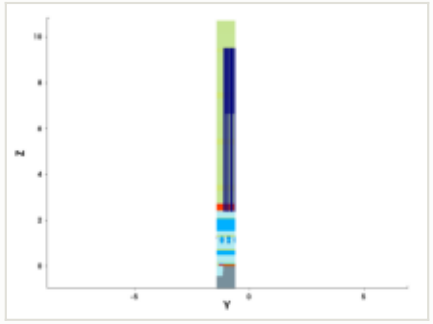

y cut at -1.035 µm

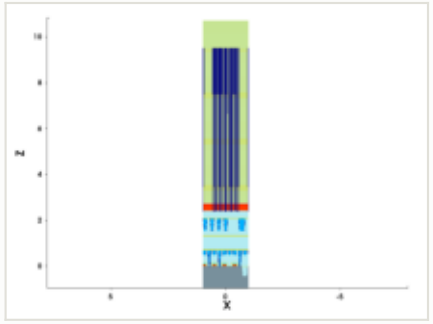

mask for this step

no mask for this step

steps by process area

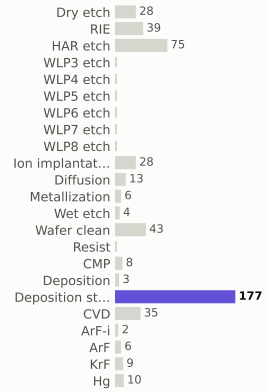

materials deposited (g)

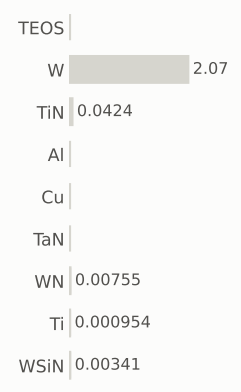

gases emitted (g)

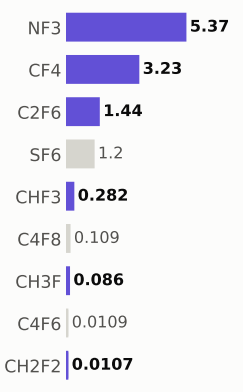

Step #6000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	580.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 369.5 of 1,872.8 (this step +0.328)

MPW materials — 43.7 of 132.5 (this step +0.0159)

GPW gases — 166.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

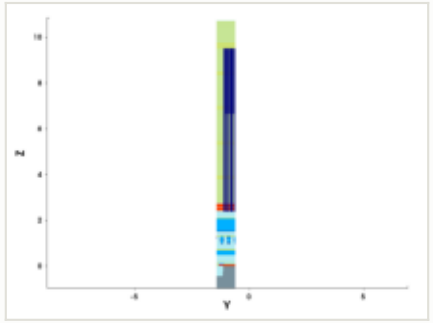

y cut at -1.035 µm

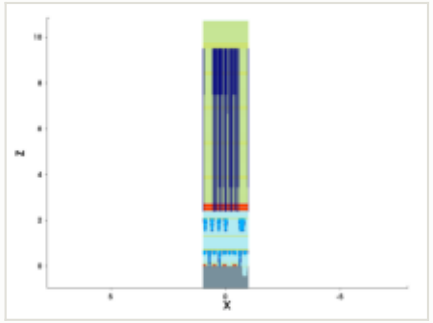

mask for this step

no mask for this step

steps by process area

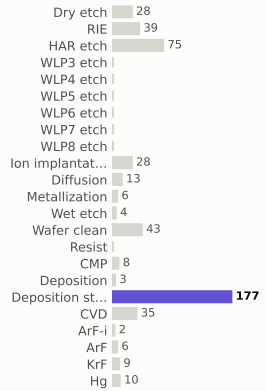

materials deposited (g)

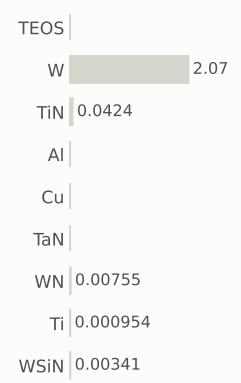

gases emitted (g)

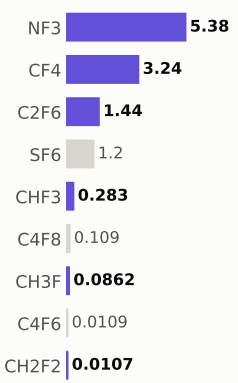

Step #6010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	580.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

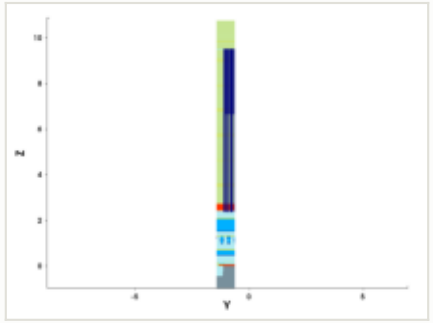

y cut at -1.035 µm

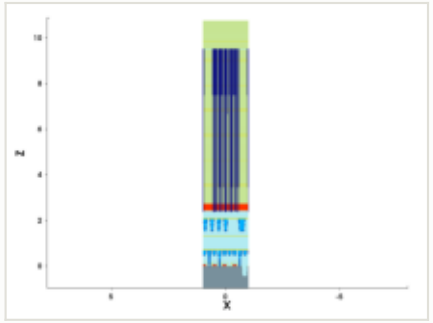

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

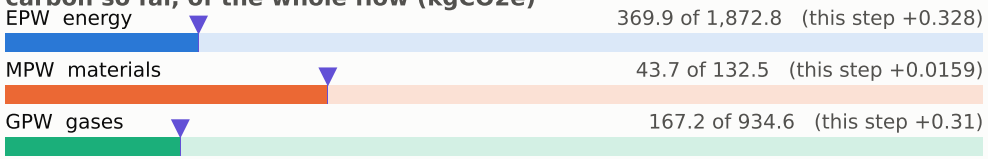

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

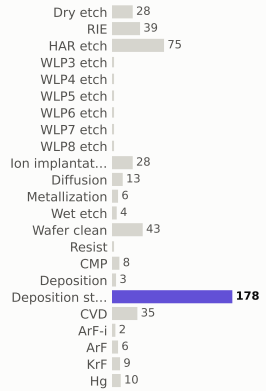

materials deposited (g)

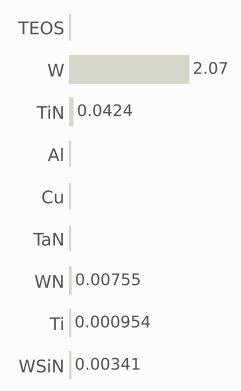

gases emitted (g)

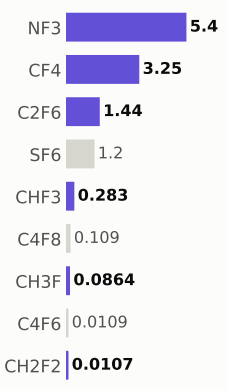

Step #6020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	581.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

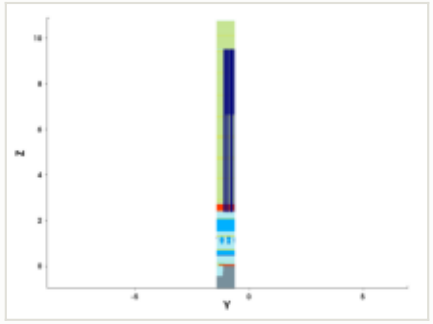

y cut at -1.035 µm

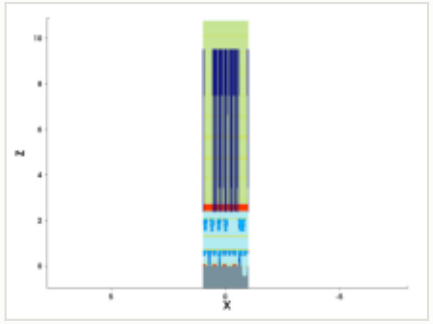

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

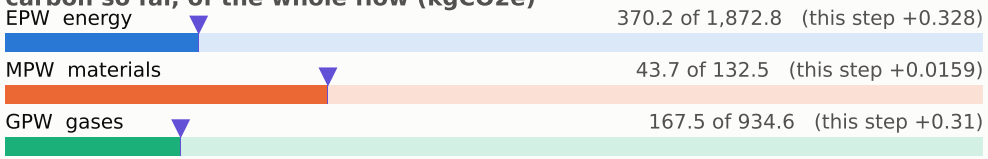

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

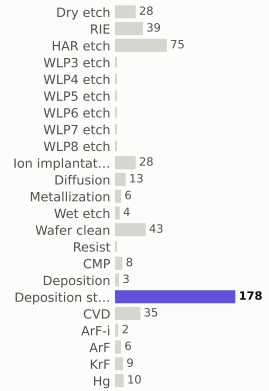

materials deposited (g)

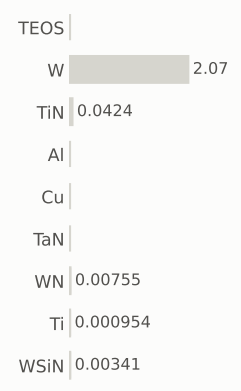

gases emitted (g)

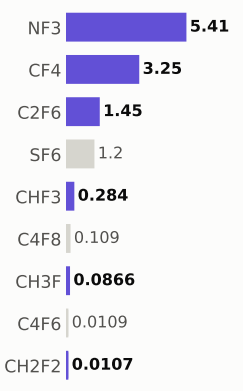

Step #6030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	582.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

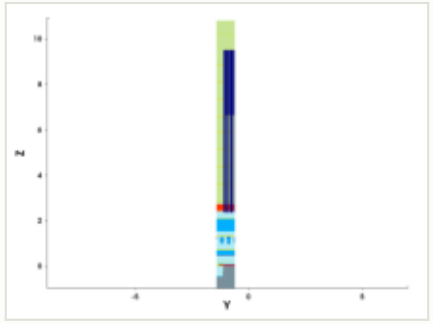

y cut at -1.035 µm

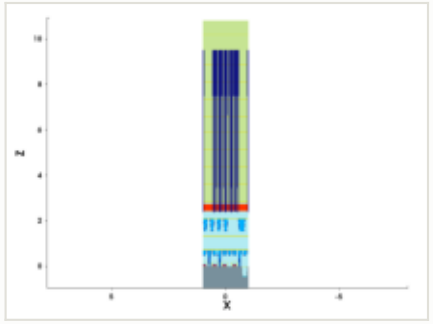

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

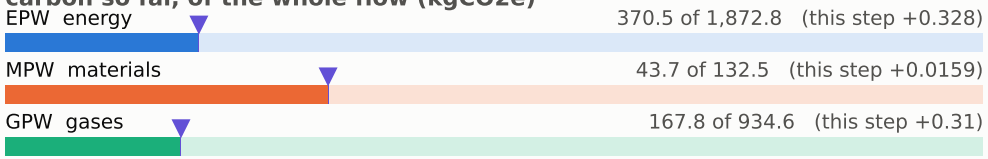

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

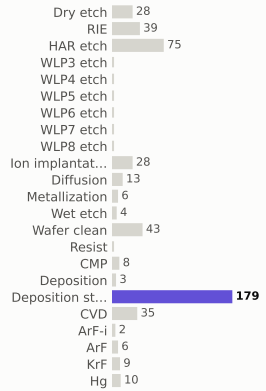

materials deposited (g)

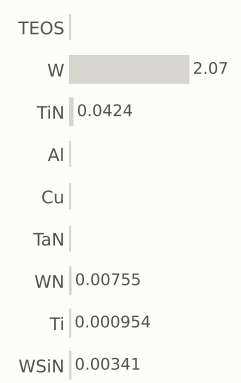

gases emitted (g)

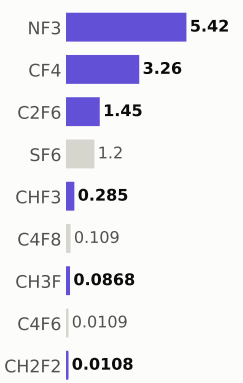

Step #6040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	582.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

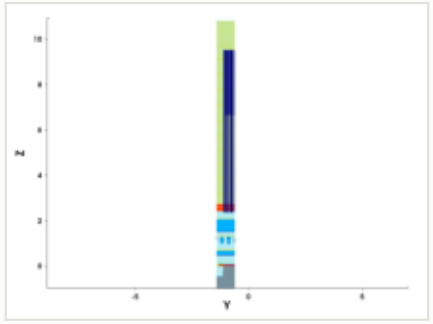

y cut at -1.035 µm

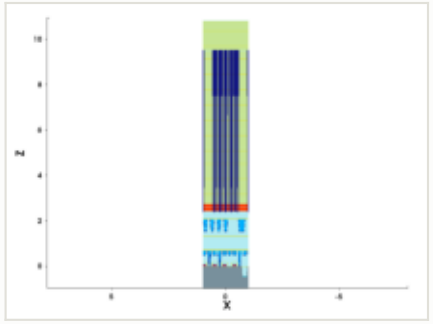

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

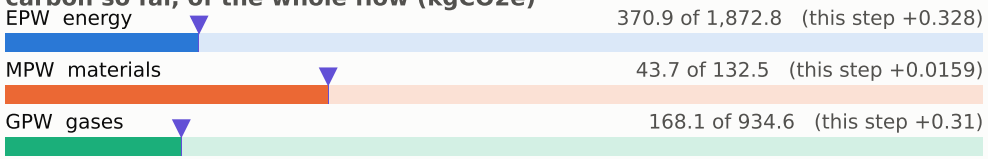

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

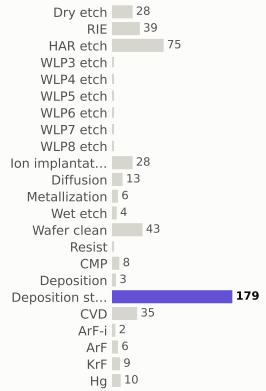

materials deposited (g)

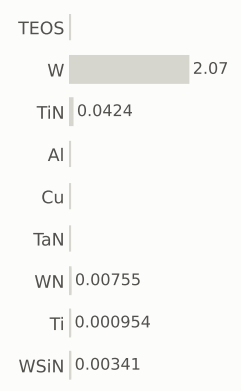

gases emitted (g)

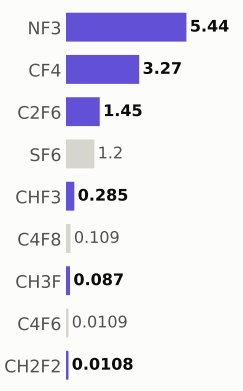

Step #6050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	583.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

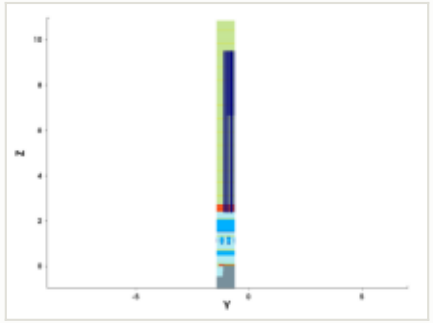

y cut at -1.035 µm

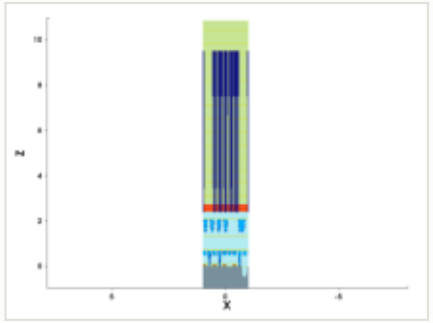

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

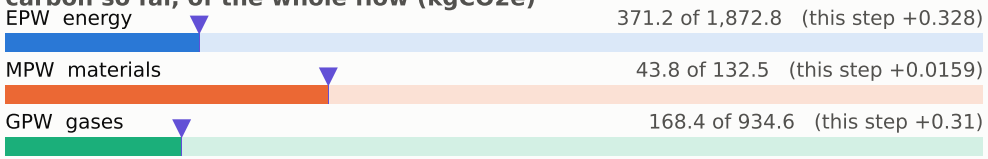

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

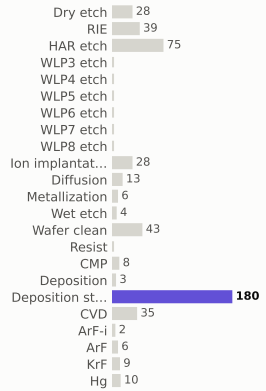

materials deposited (g)

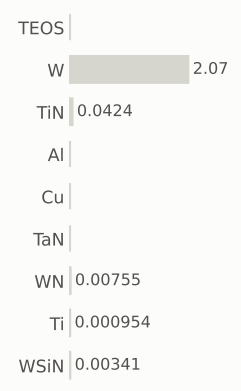

gases emitted (g)

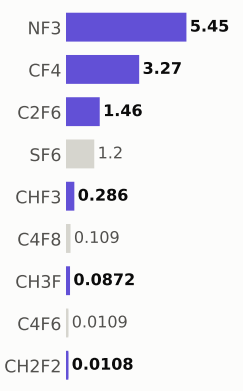

Step #6060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	584.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

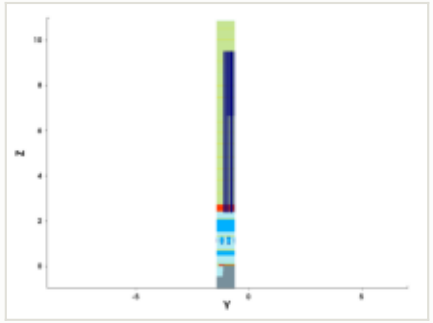

y cut at -1.035 µm

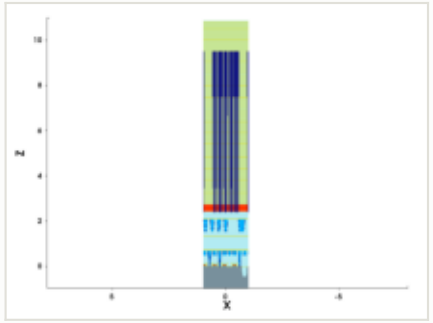

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

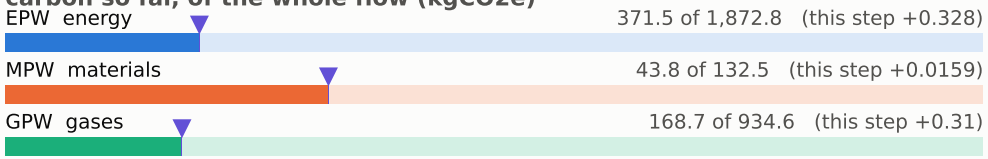

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

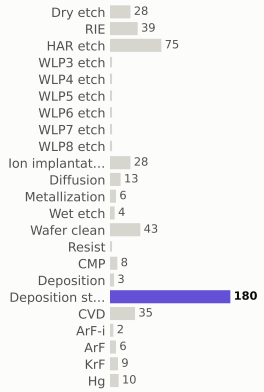

materials deposited (g)

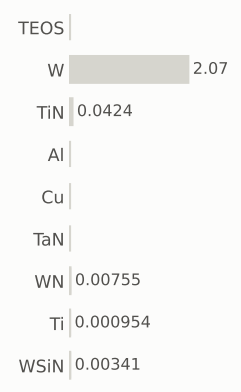

gases emitted (g)

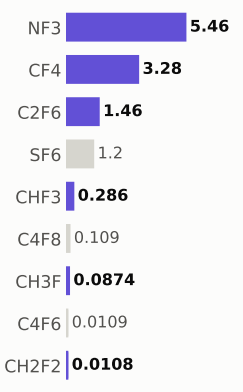

Step #6070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	584.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

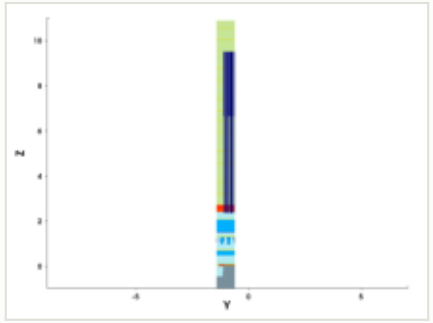

y cut at -1.035 µm

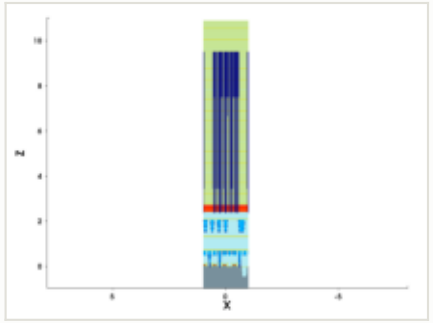

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

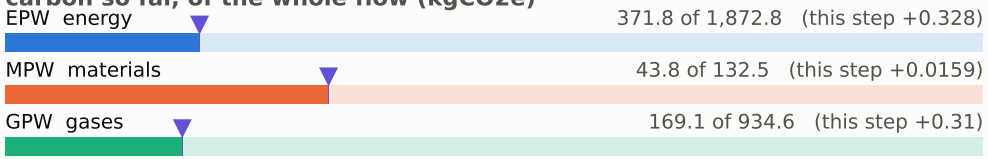

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

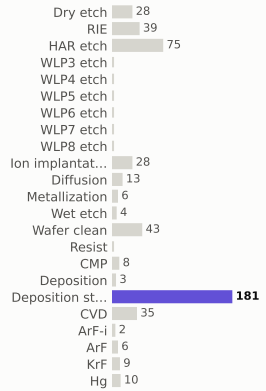

materials deposited (g)

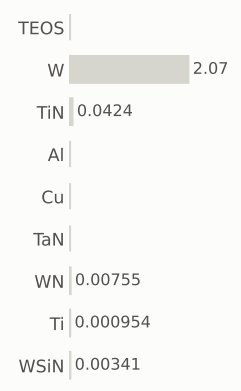

gases emitted (g)

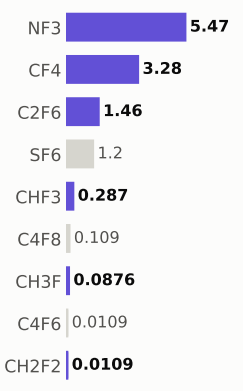

Step #6080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	585.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

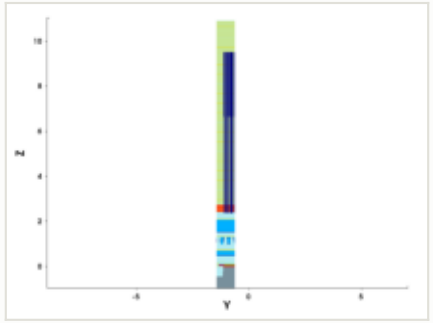

y cut at -1.035 µm

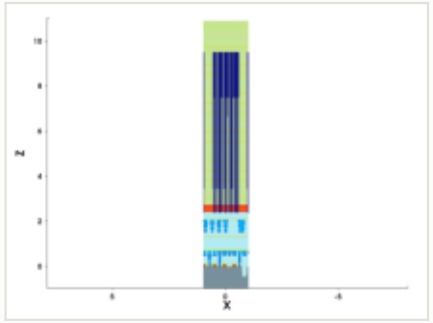

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

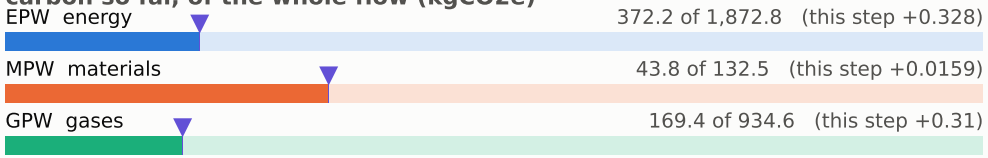

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

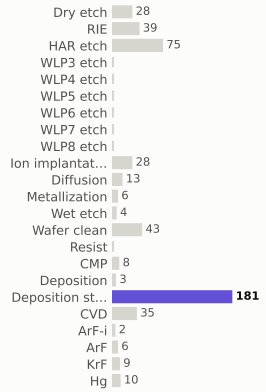

materials deposited (g)

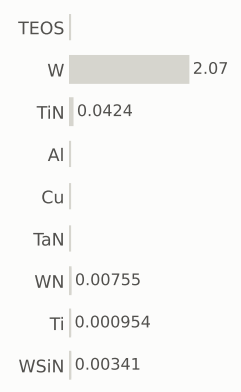

gases emitted (g)

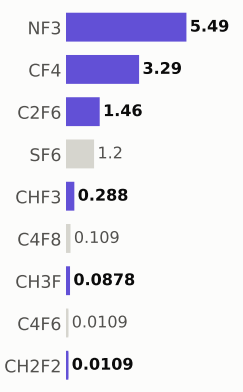

Step #6090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	586.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

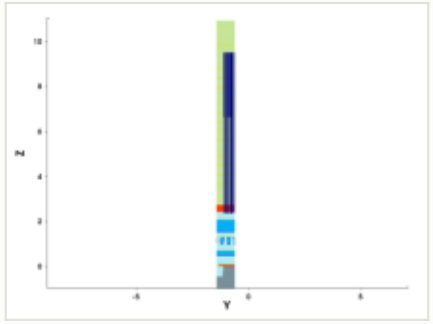

y cut at -1.035 µm

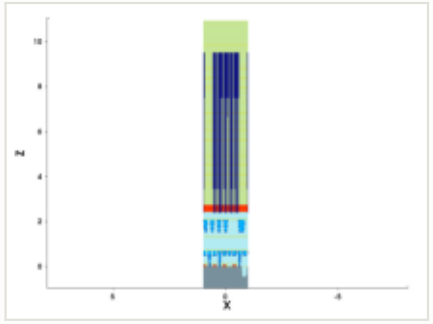

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

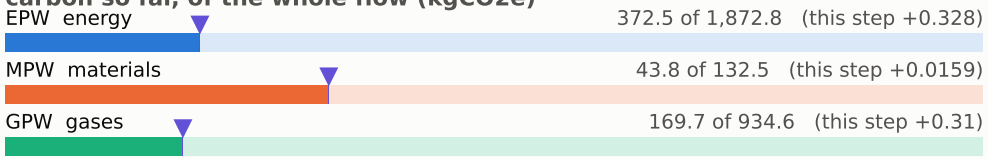

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

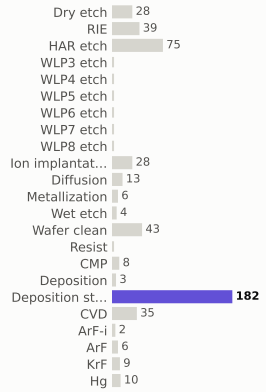

materials deposited (g)

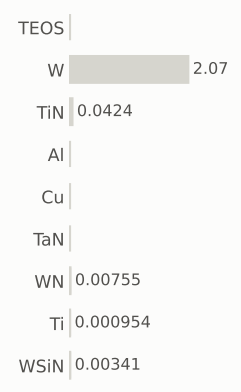

gases emitted (g)



Step #6100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	586.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

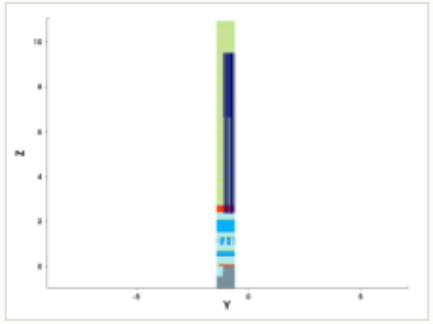

y cut at -1.035 µm

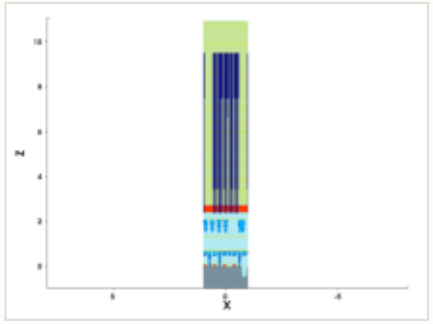

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

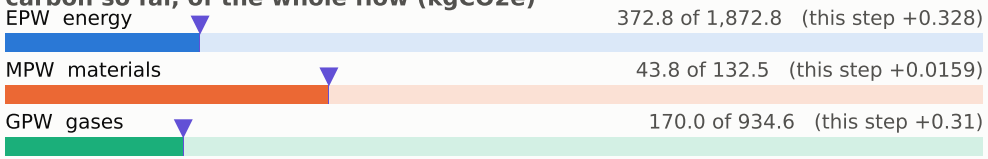

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

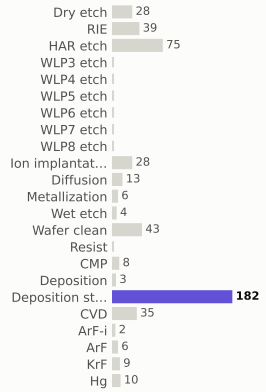

materials deposited (g)

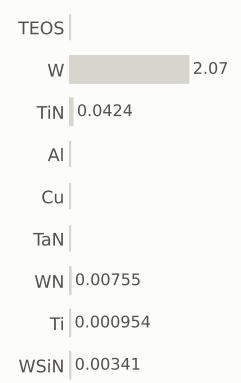

gases emitted (g)

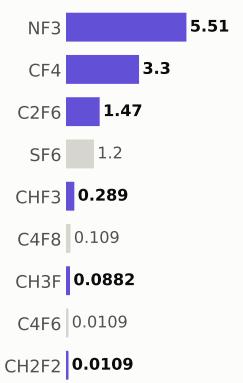

Step #6110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	587.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

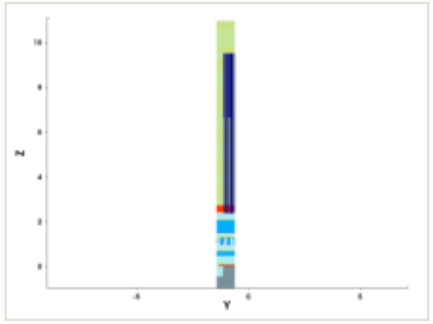

y cut at -1.035 µm

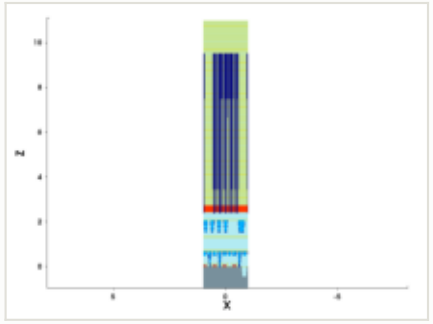

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

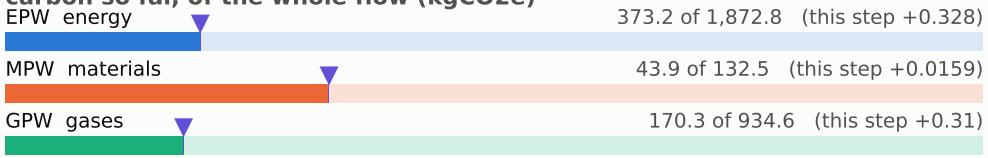

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

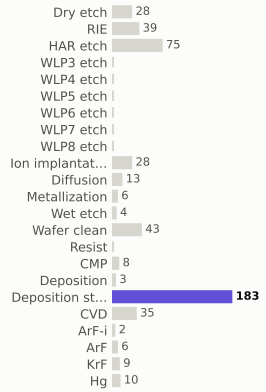

materials deposited (g)

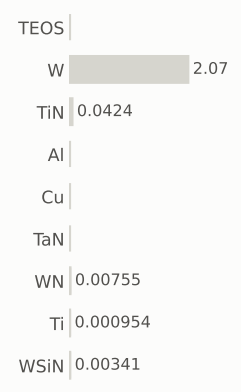

gases emitted (g)

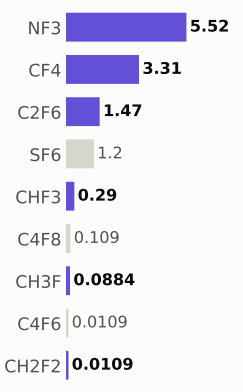

Step #6120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	588.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

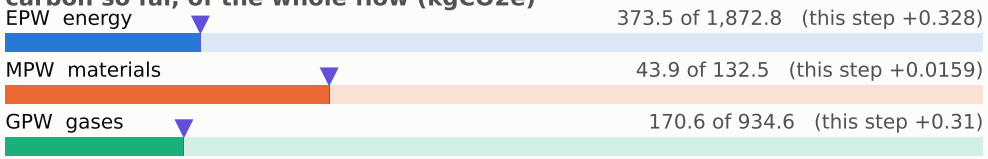

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

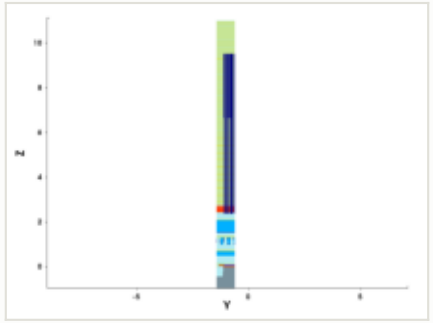

y cut at -1.035 µm

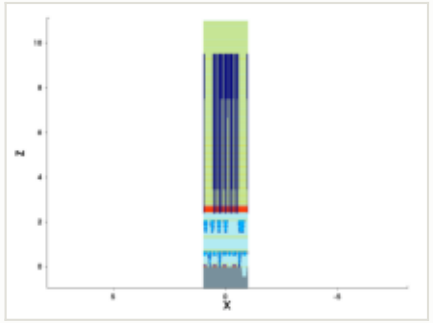

mask for this step

no mask for this step

steps by process area

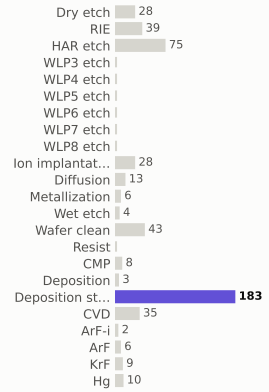

materials deposited (g)

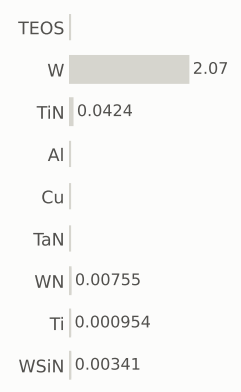

gases emitted (g)

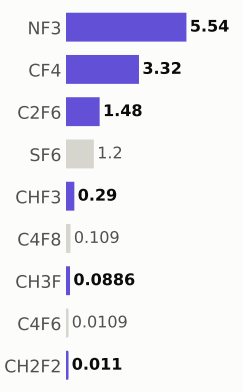

Step #6130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	588.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

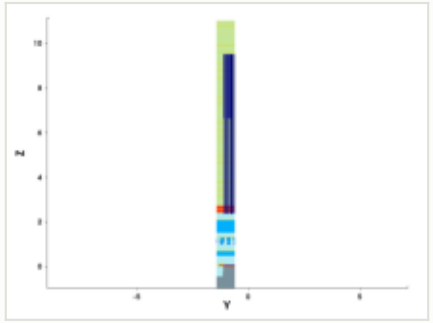

y cut at -1.035 µm

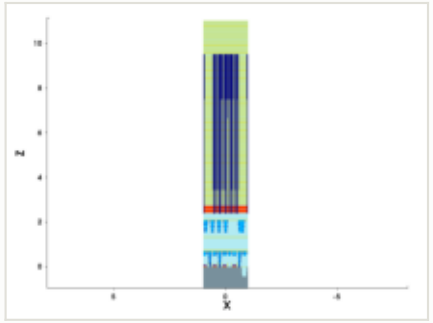

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

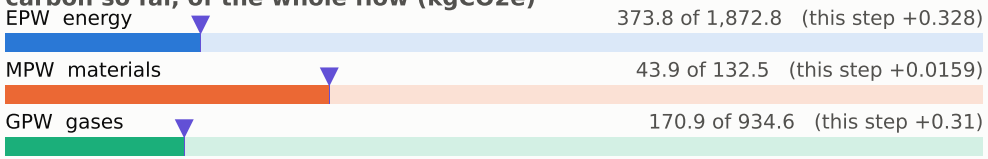

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

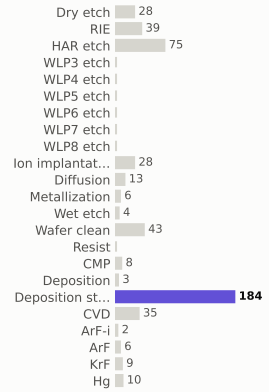

materials deposited (g)

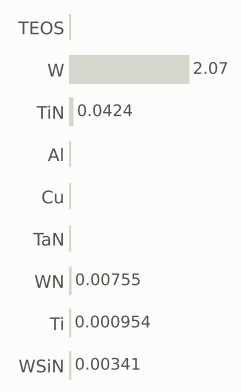

gases emitted (g)

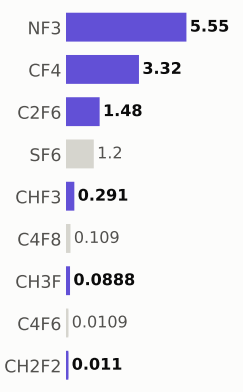

Step #6140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	589.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

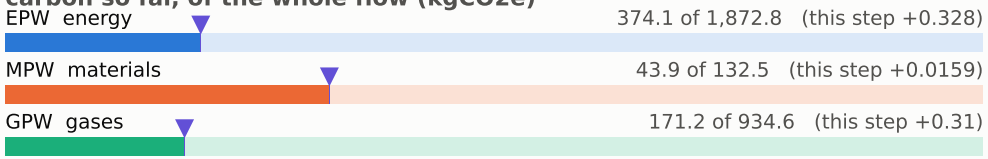

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

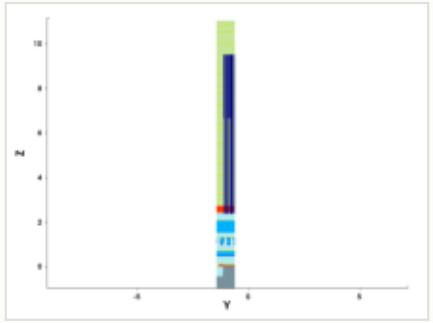

y cut at -1.035 µm

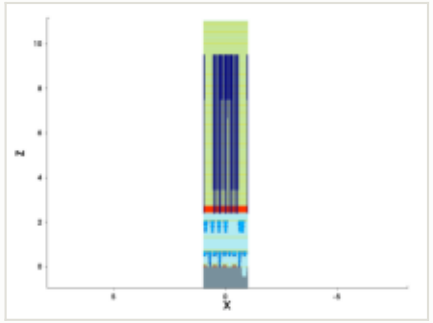

mask for this step

no mask for this step

steps by process area

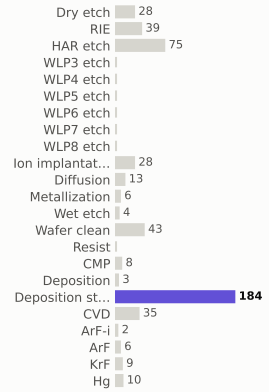

materials deposited (g)

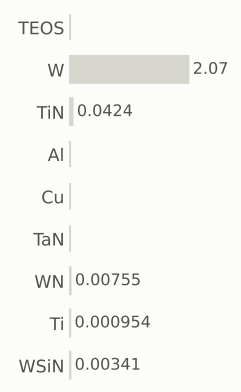

gases emitted (g)

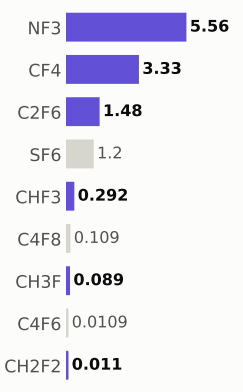

Step #6150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	589.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

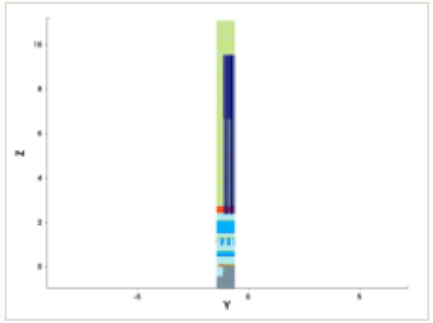

y cut at -1.035 µm

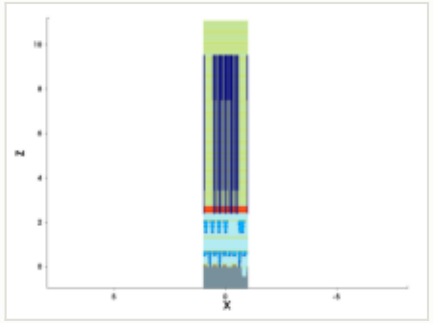

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

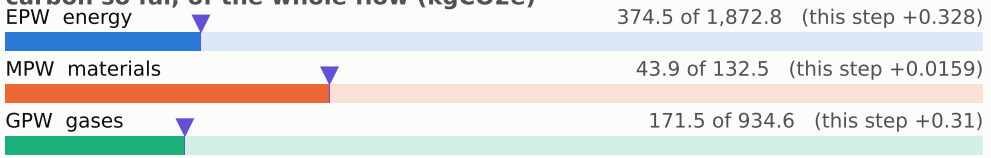

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

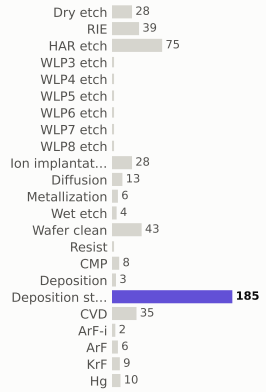

materials deposited (g)

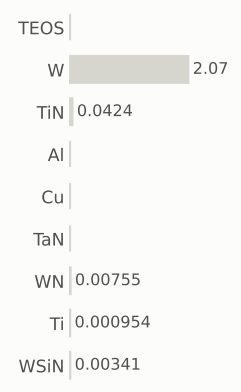

gases emitted (g)

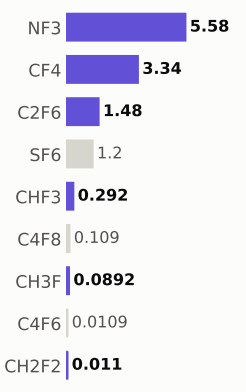

Step #6160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	590.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

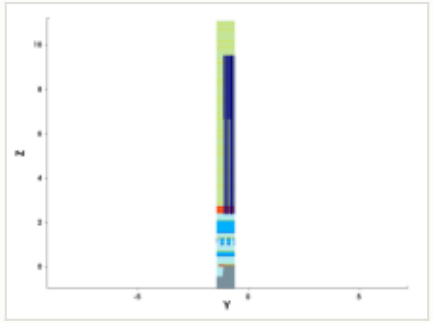

y cut at -1.035 µm

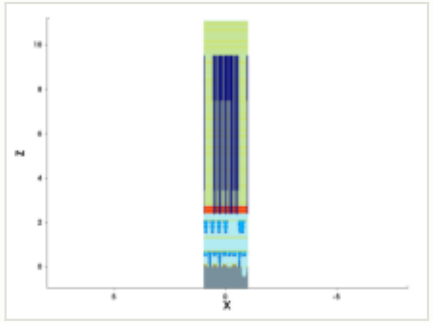

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

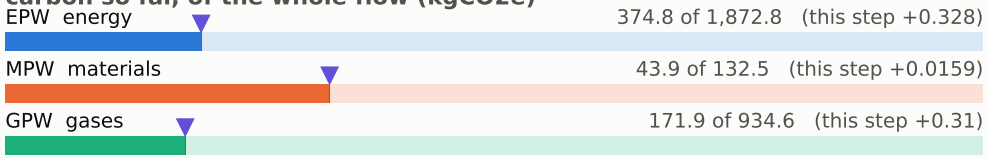

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

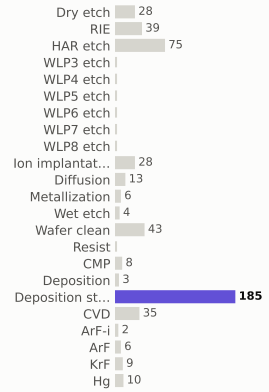

materials deposited (g)

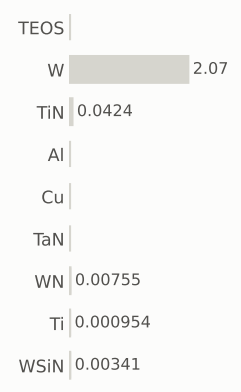

gases emitted (g)

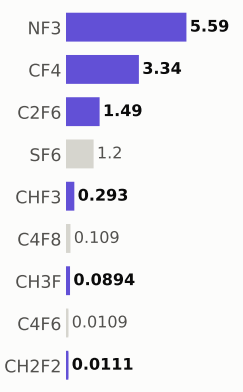

Step #6170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	591.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

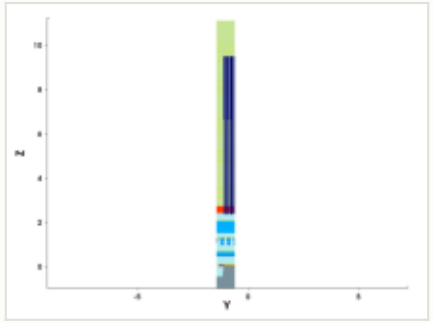

y cut at -1.035 µm

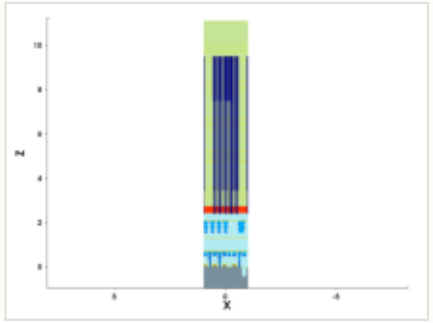

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

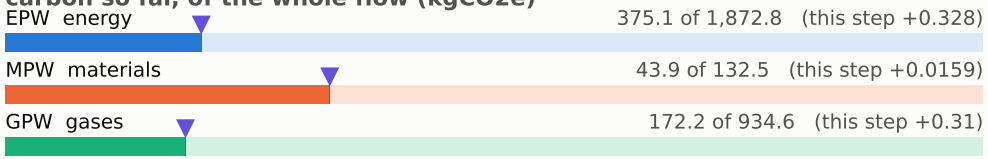

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

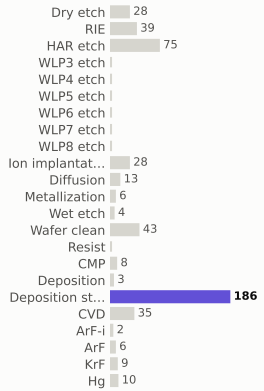

materials deposited (g)

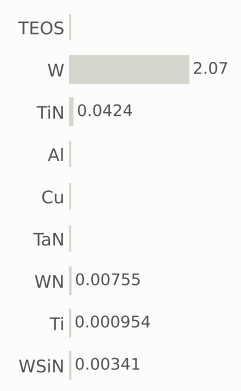

gases emitted (g)

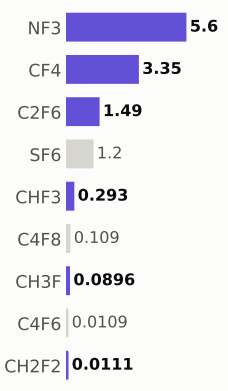

Step #6180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	591.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

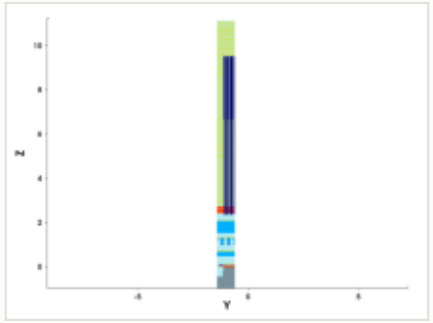

y cut at -1.035 µm

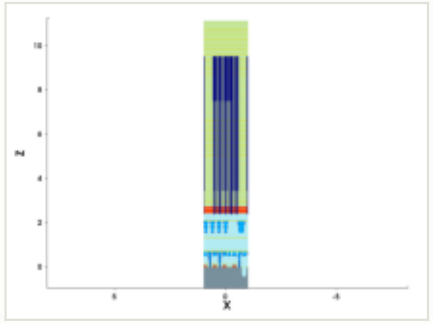

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

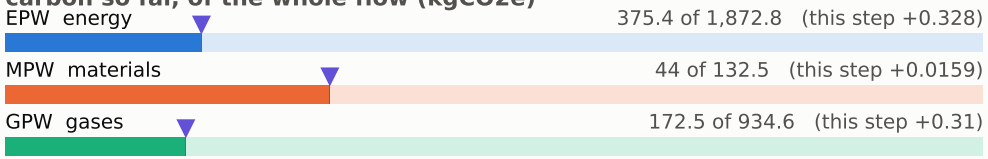

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

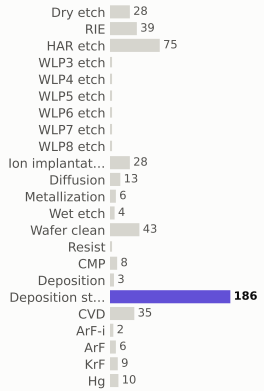

materials deposited (g)

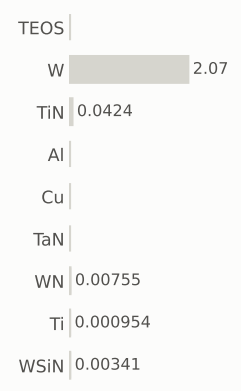

gases emitted (g)

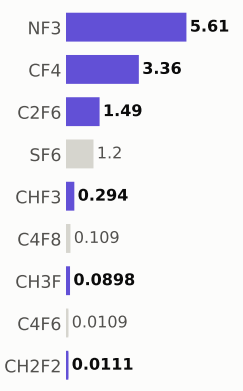

Step #6190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	592.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

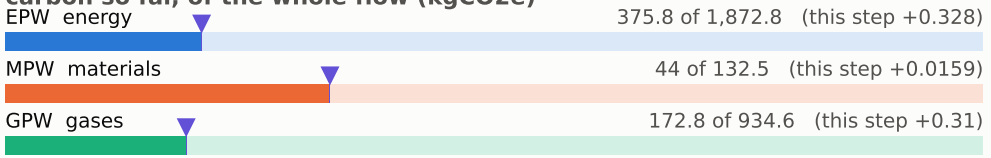

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

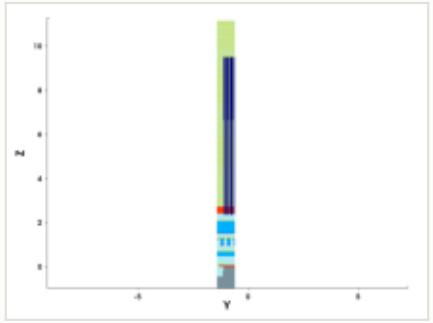

y cut at -1.035 µm

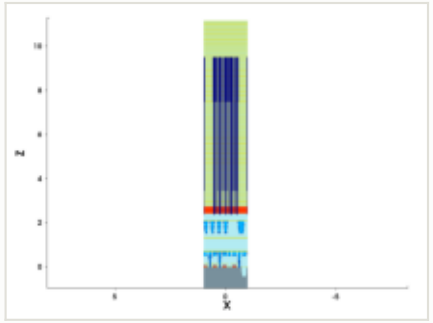

mask for this step

no mask for this step

steps by process area



materials deposited (g)

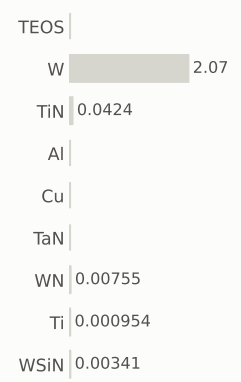

gases emitted (g)



Step #6200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	593.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

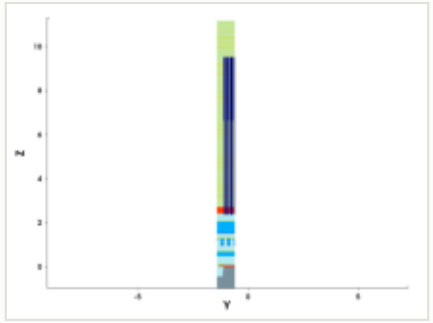

y cut at -1.035 µm

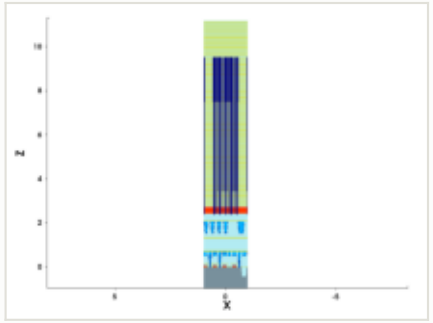

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

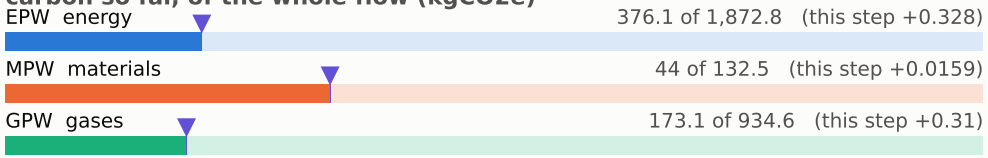

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #6210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	593.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

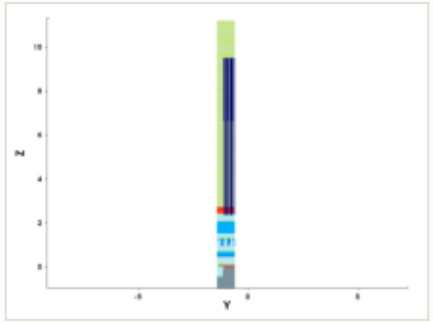

y cut at -1.035 µm

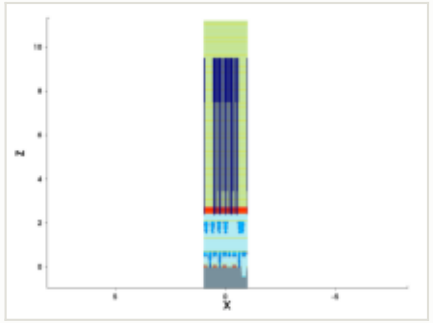

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

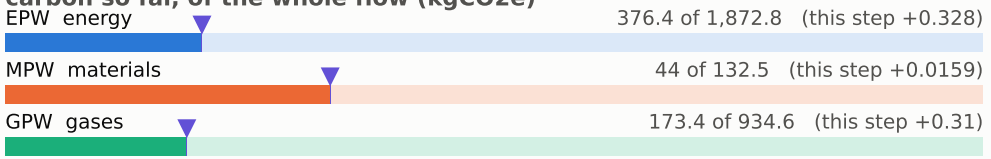

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

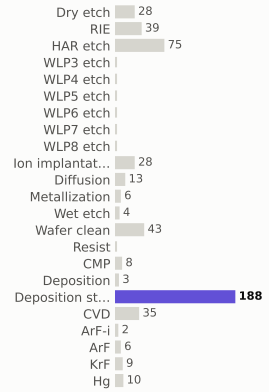

materials deposited (g)

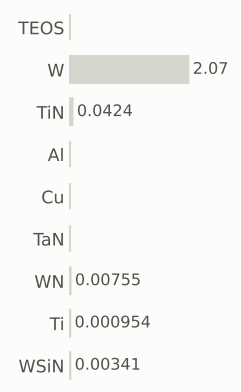

gases emitted (g)

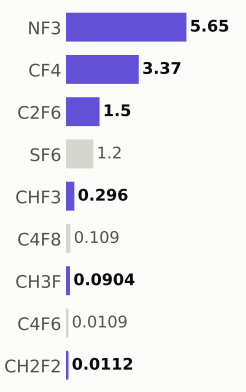

Step #6220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	594.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

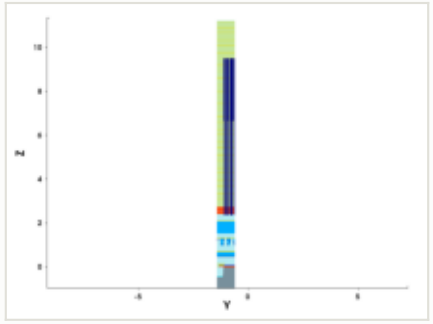

y cut at -1.035 µm

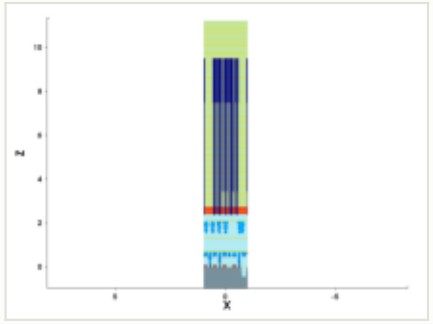

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

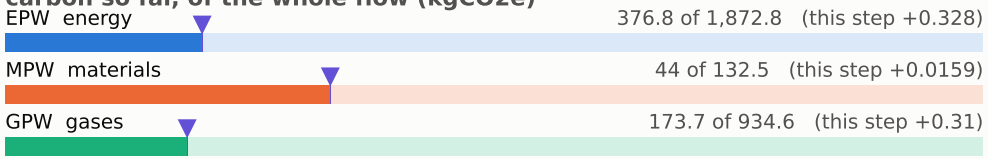

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

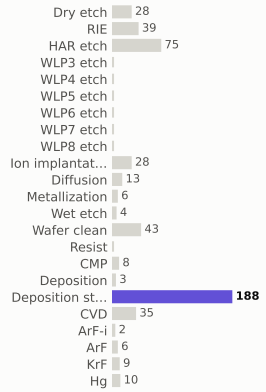

materials deposited (g)

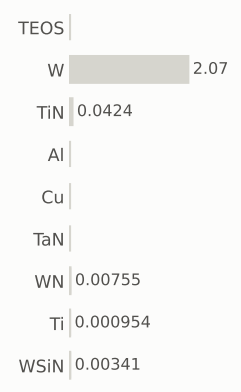

gases emitted (g)

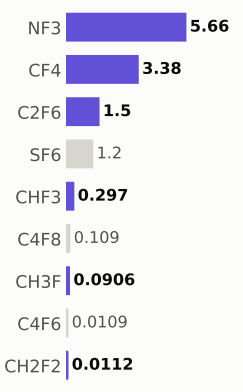

Step #6230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	595.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

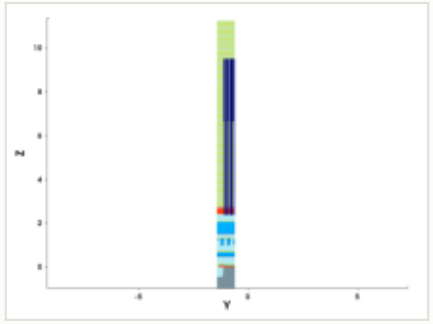

y cut at -1.035 µm

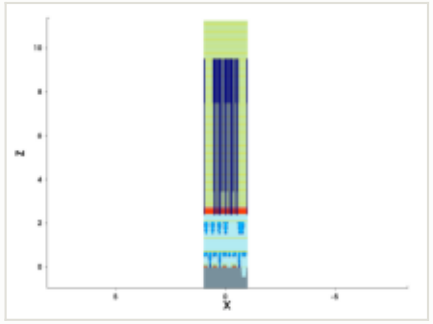

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

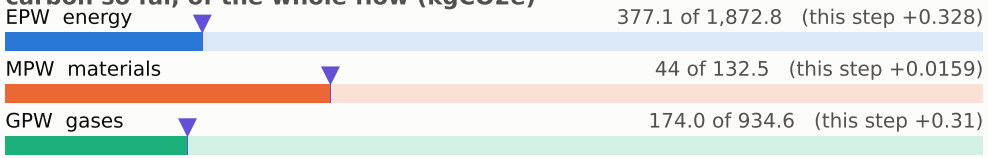

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

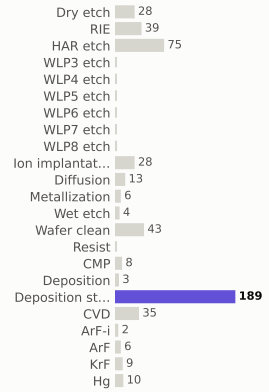

materials deposited (g)

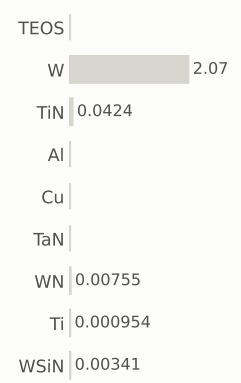

gases emitted (g)

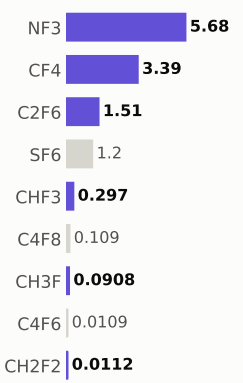

Step #6240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	595.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

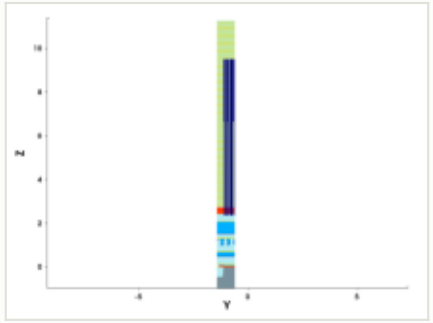

y cut at -1.035 µm

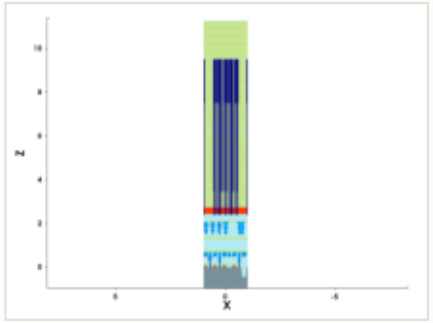

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

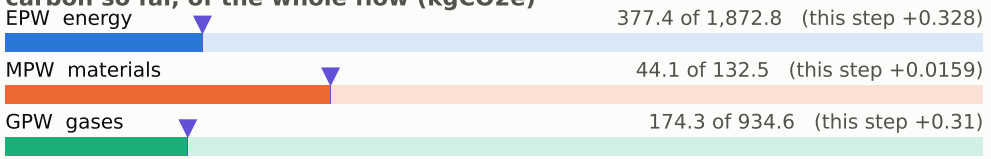

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

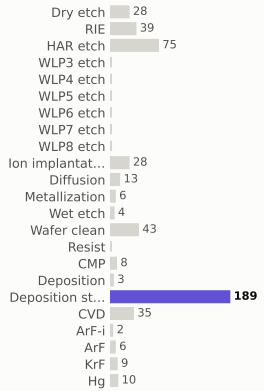

materials deposited (g)

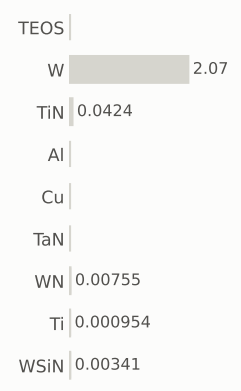

gases emitted (g)

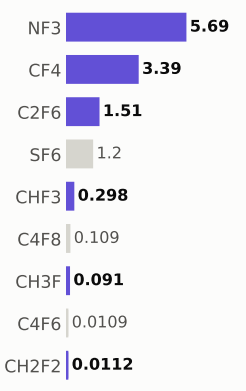

Step #6250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	596.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

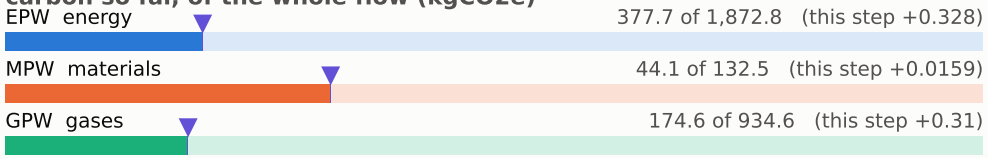

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

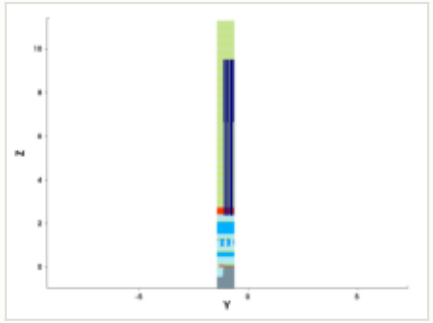

y cut at -1.035 µm

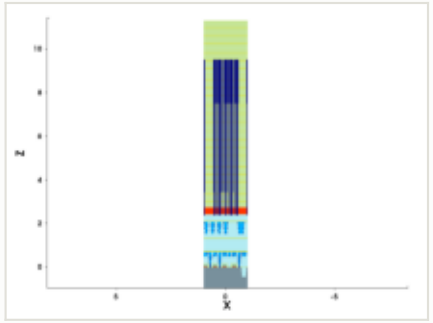

mask for this step

no mask for this step

steps by process area

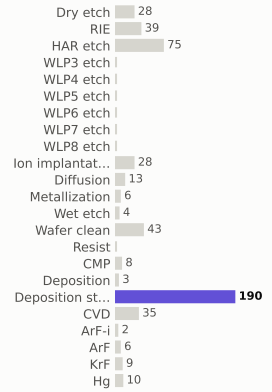

materials deposited (g)

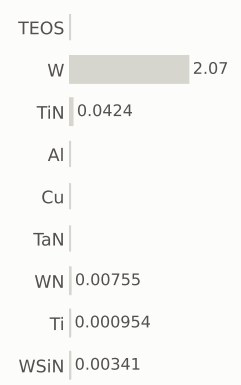

gases emitted (g)

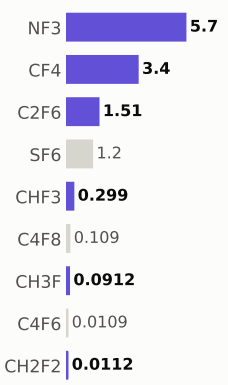

Step #6260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	597.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

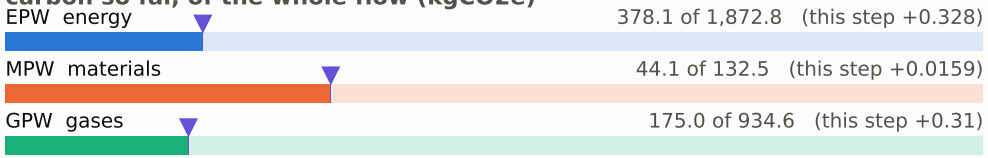

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

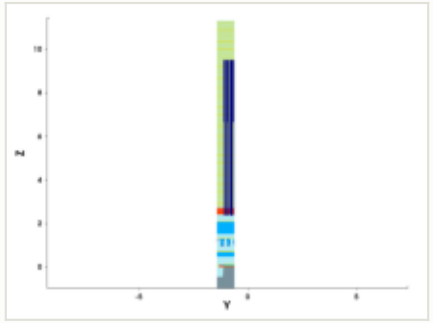

y cut at -1.035 µm

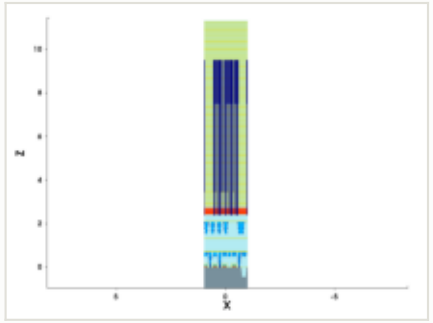

mask for this step

no mask for this step

steps by process area

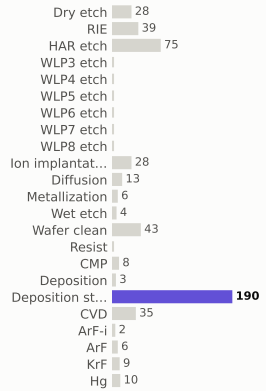

materials deposited (g)

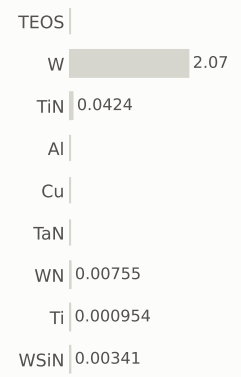

gases emitted (g)



Step #6270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	597.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

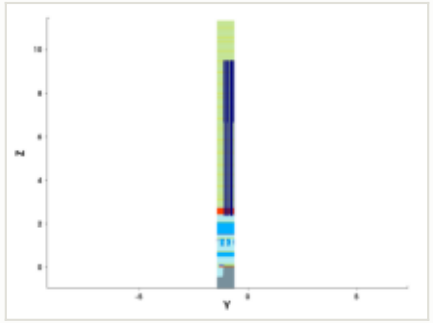

y cut at -1.035 µm

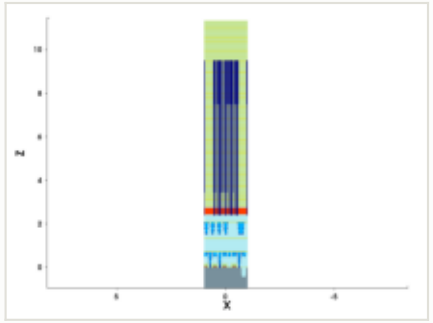

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

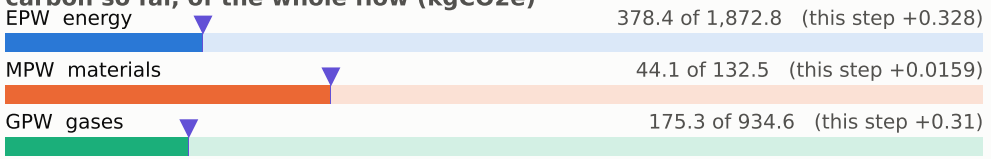

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

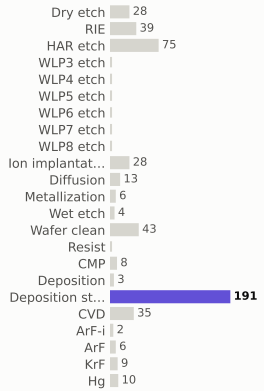

materials deposited (g)

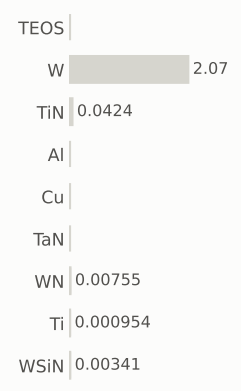

gases emitted (g)

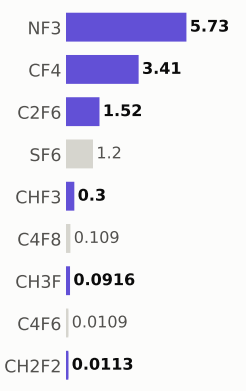

Step #6280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	598.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

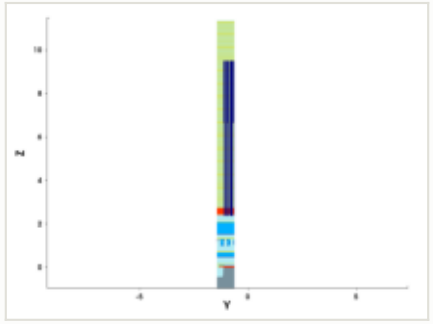

y cut at -1.035 µm

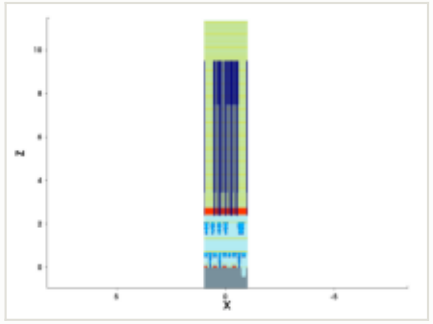

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

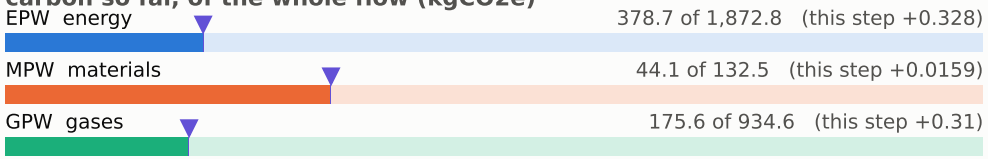

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

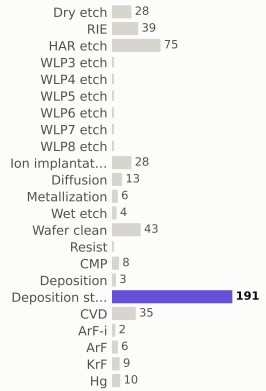

materials deposited (g)

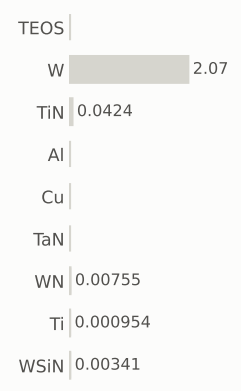

gases emitted (g)

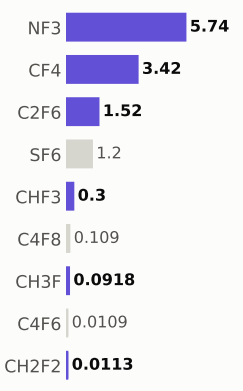

Step #6290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	599.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

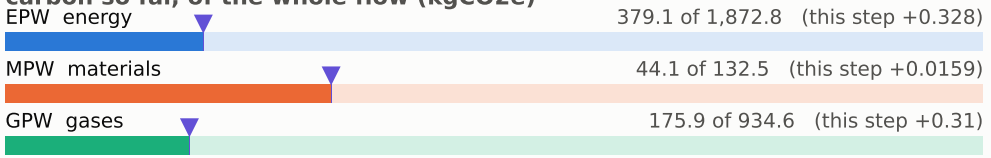

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

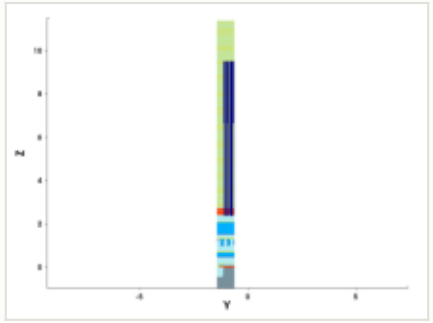

y cut at -1.035 µm

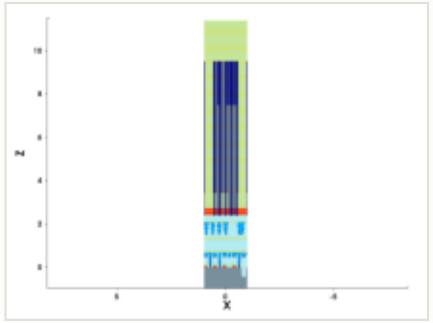

mask for this step

no mask for this step

steps by process area

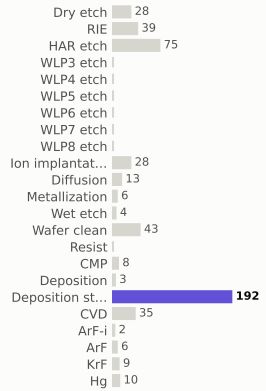

materials deposited (g)

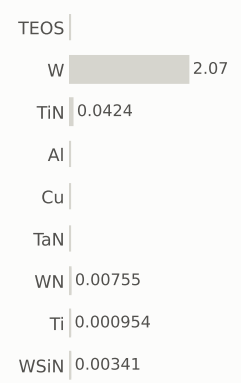

gases emitted (g)

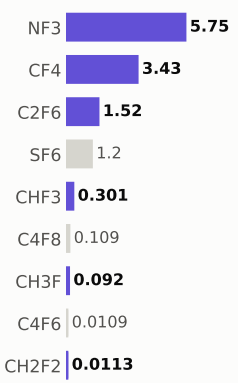

Step #6300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	599.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

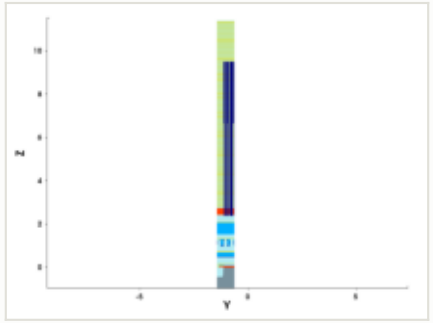

y cut at -1.035 µm

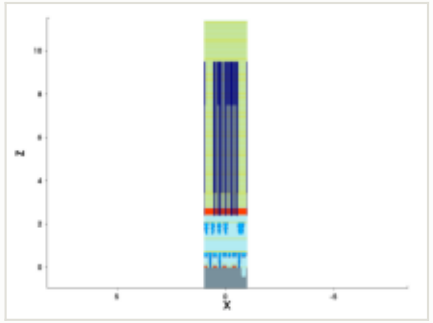

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

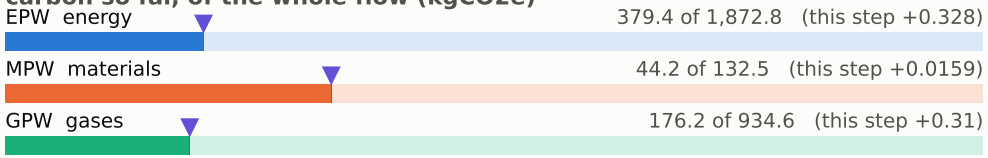

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

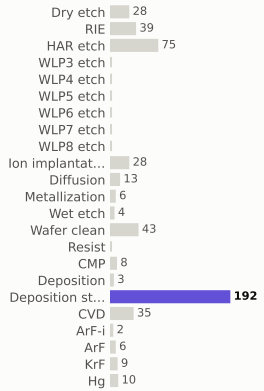

materials deposited (g)

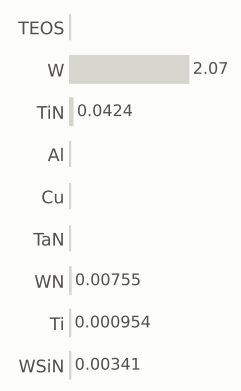

gases emitted (g)

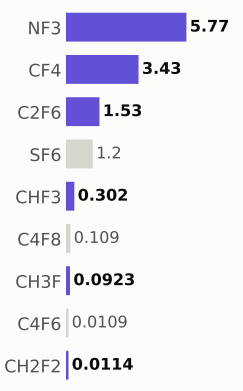

Step #6310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	600.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

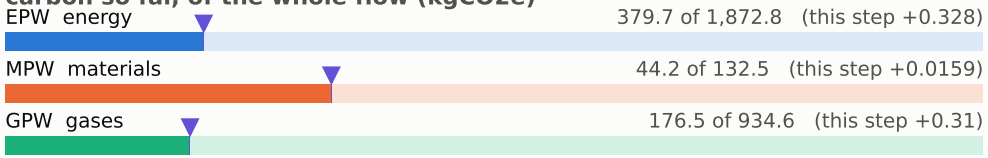

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

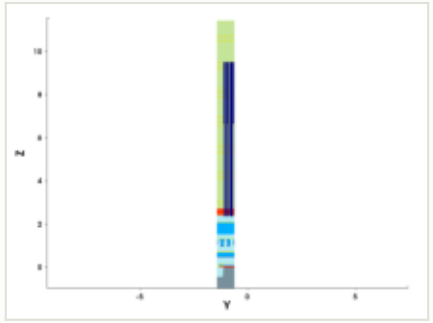

y cut at -1.035 µm

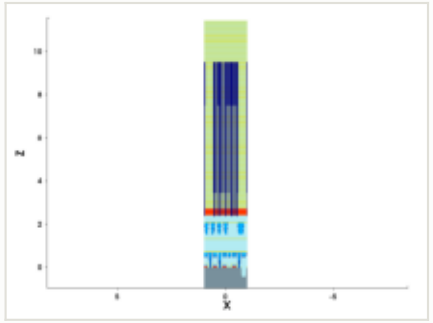

mask for this step

no mask for this step

steps by process area

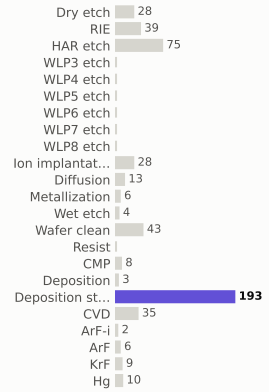

materials deposited (g)

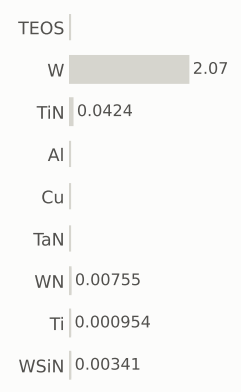

gases emitted (g)

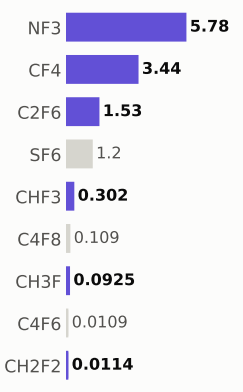

Step #6320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	601.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

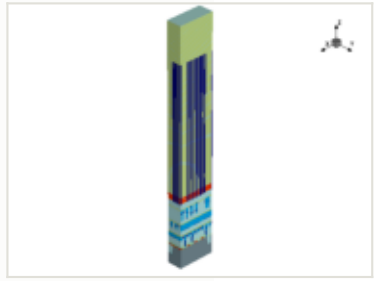



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

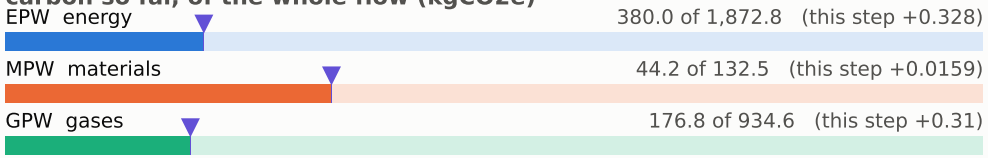

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

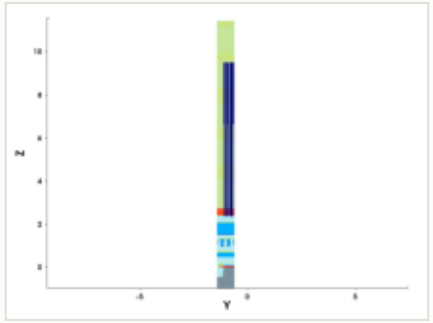

y cut at -1.035 µm

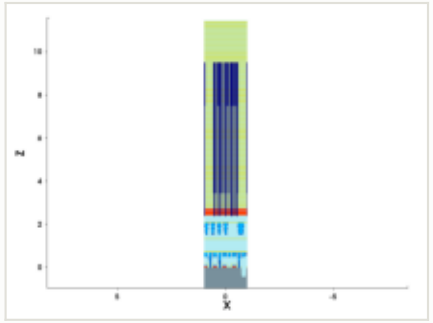

mask for this step

no mask for this step

steps by process area

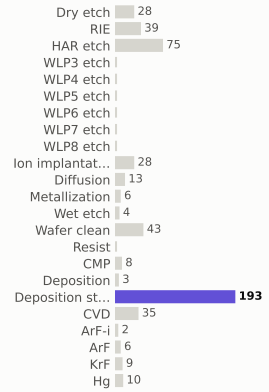

materials deposited (g)

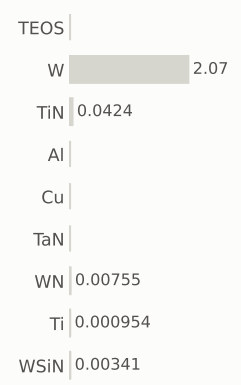

gases emitted (g)

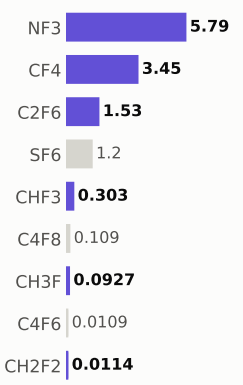

Step #6330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	601.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

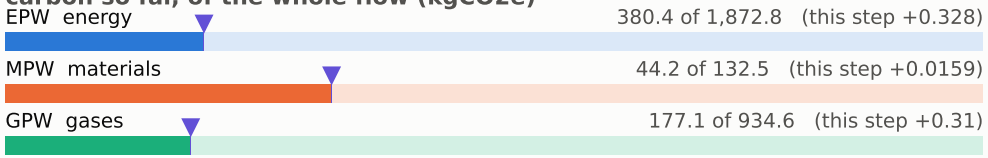

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

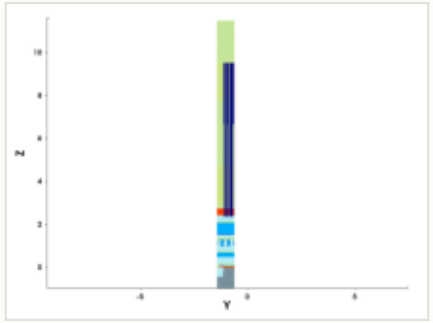

y cut at -1.035 µm

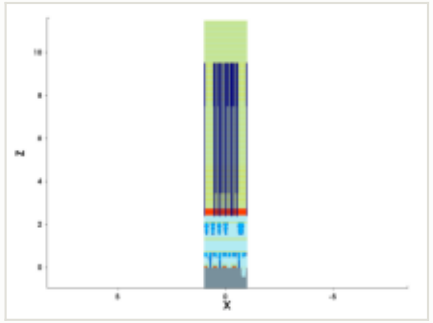

mask for this step

no mask for this step

steps by process area

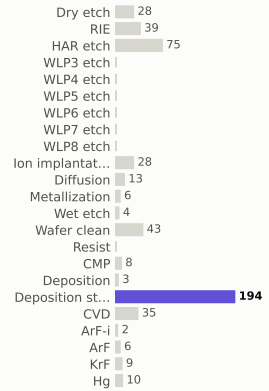

materials deposited (g)

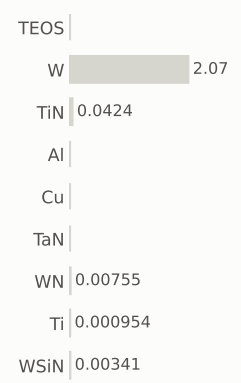

gases emitted (g)

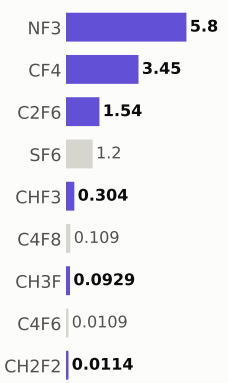

Step #6340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	602.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

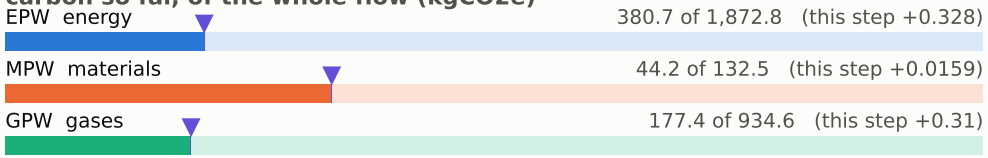

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

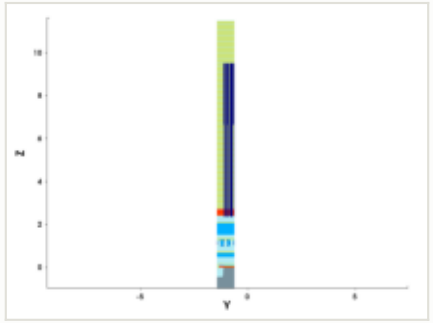

y cut at -1.035 µm

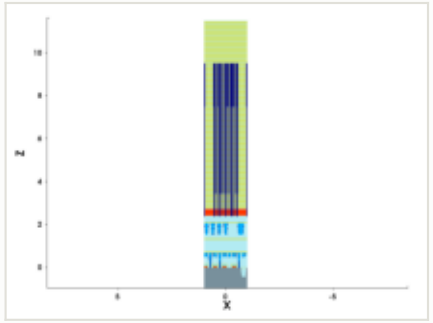

mask for this step

no mask for this step

steps by process area

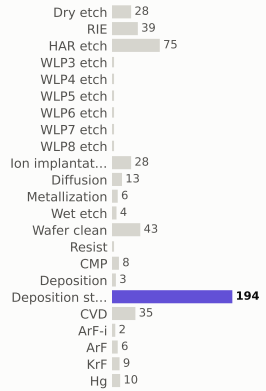

materials deposited (g)

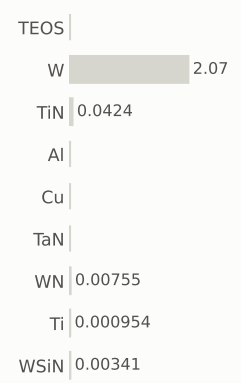

gases emitted (g)

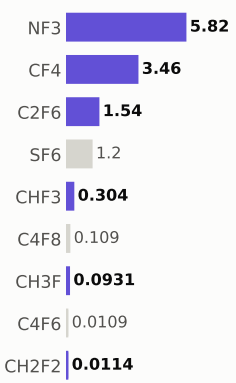

Step #6350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	603.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

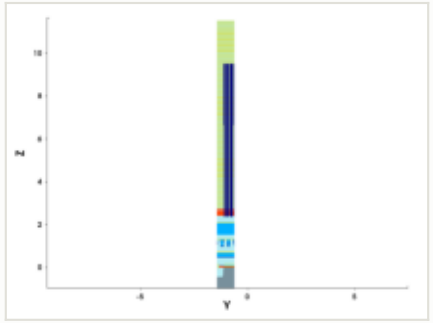

y cut at -1.035 µm

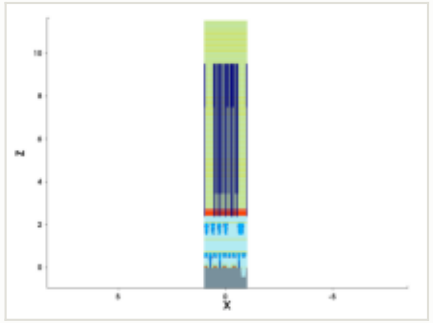

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

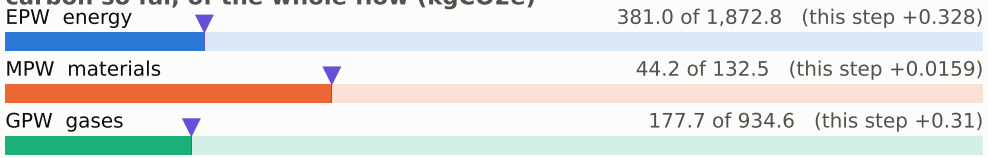

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

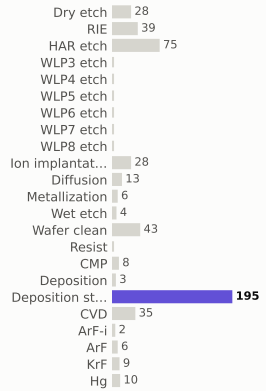

materials deposited (g)

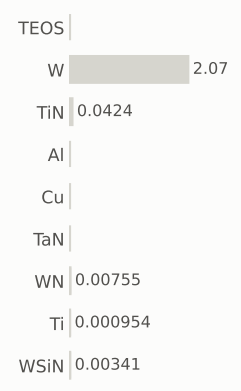

gases emitted (g)

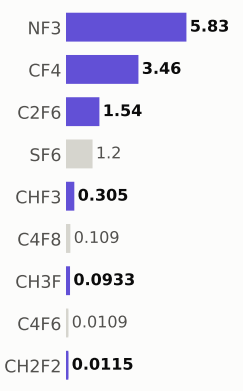

Step #6360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	603.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

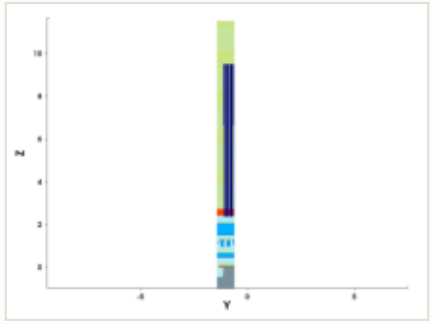

y cut at -1.035 µm

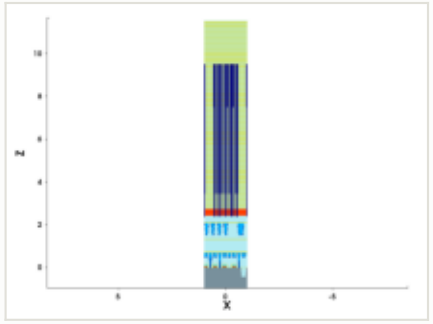

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

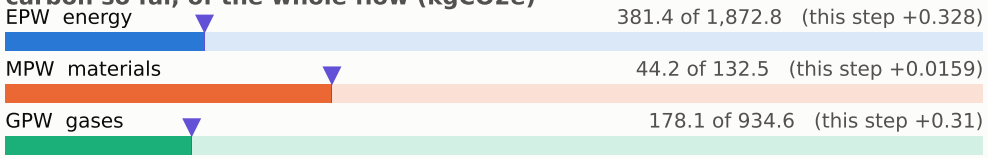

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

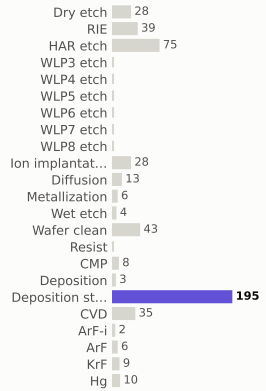

materials deposited (g)

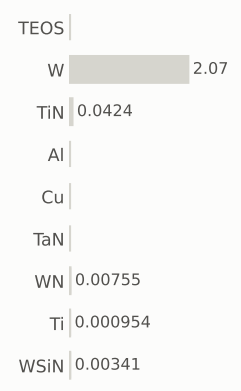

gases emitted (g)

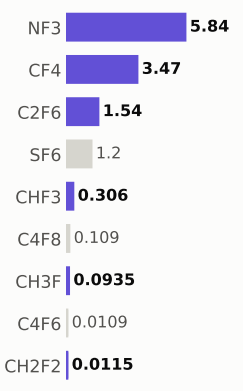

Step #6370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	604.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

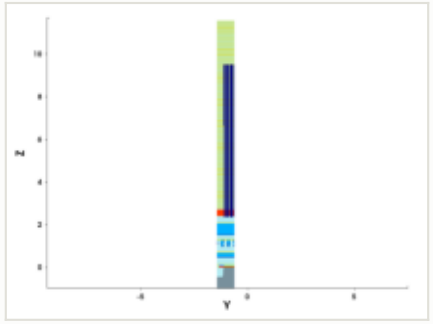

y cut at -1.035 µm

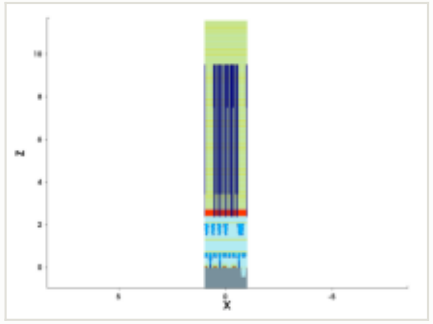

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

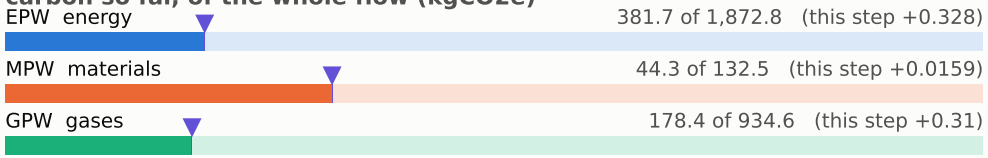

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

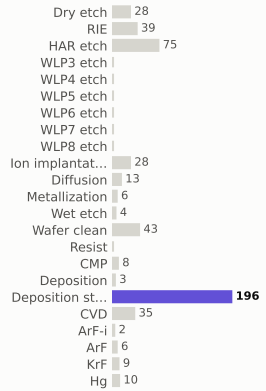

materials deposited (g)

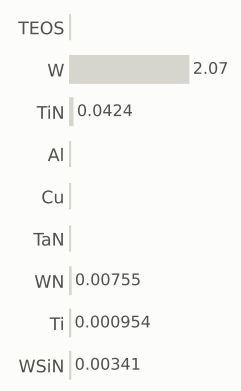

gases emitted (g)

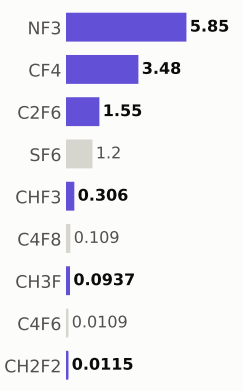

Step #6380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	605.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

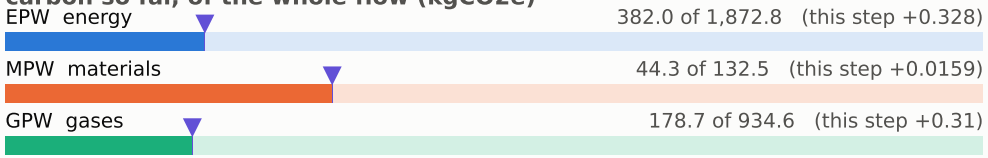

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

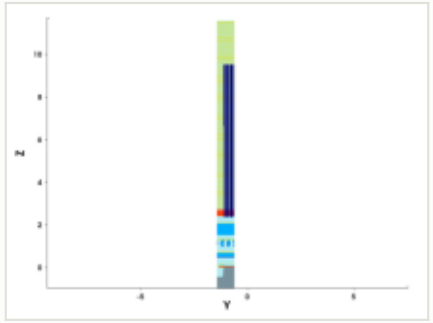

y cut at -1.035 µm

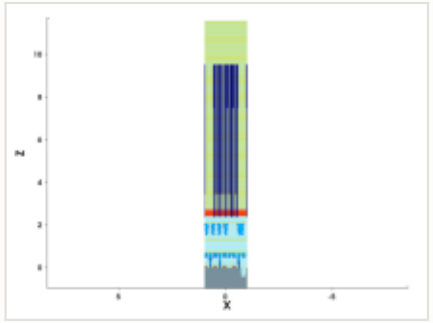

mask for this step

no mask for this step

steps by process area

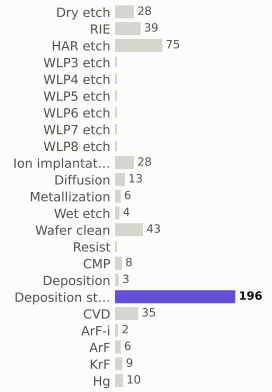

materials deposited (g)

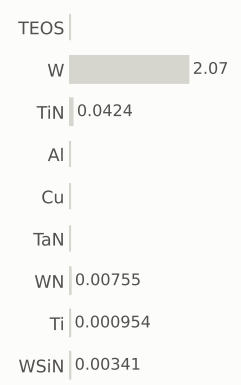

gases emitted (g)

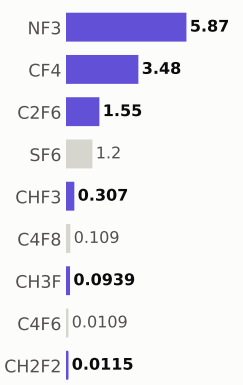

Step #6390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	605.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

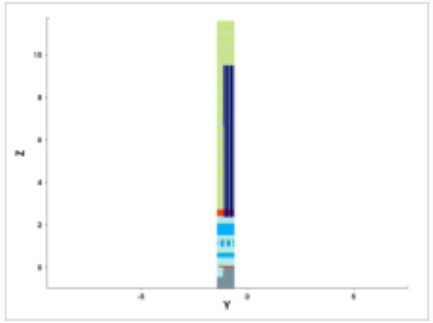

y cut at -1.035 µm

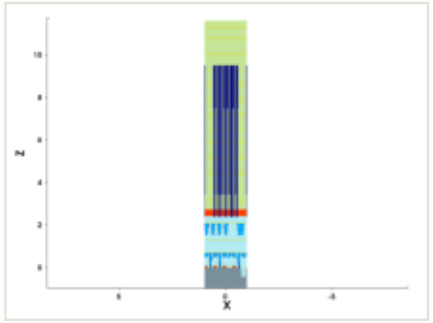

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

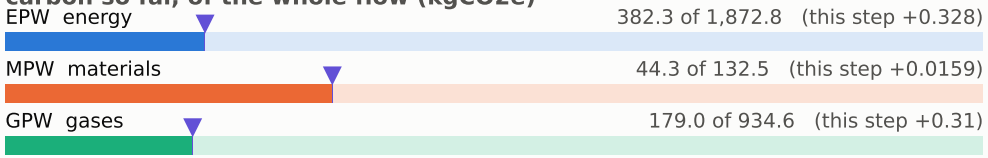

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

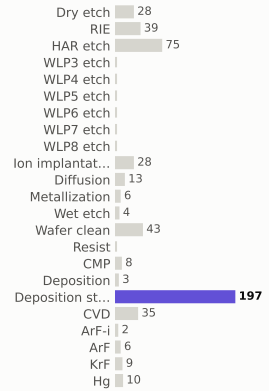

materials deposited (g)

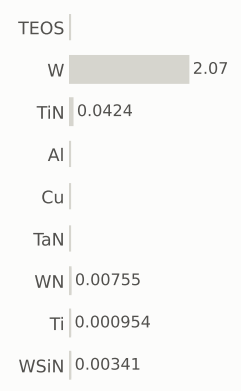

gases emitted (g)

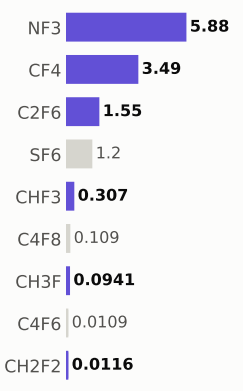

Step #6400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	606.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

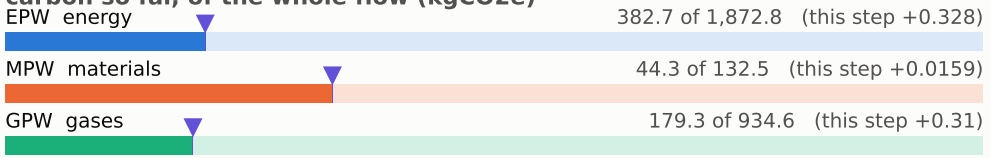

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

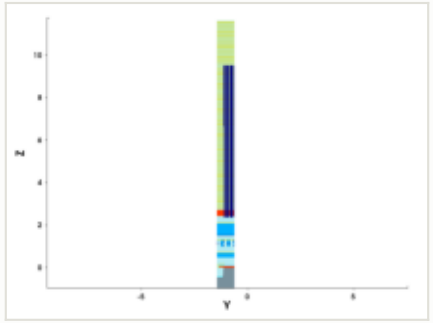

y cut at -1.035 µm

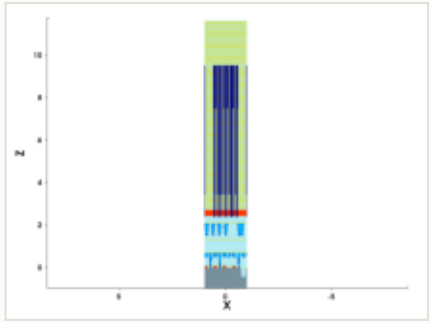

mask for this step

no mask for this step

steps by process area

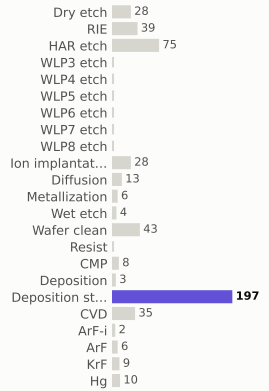

materials deposited (g)

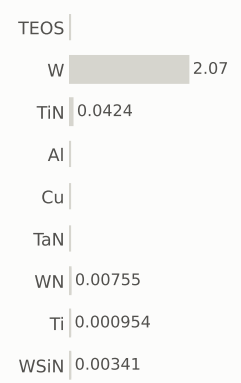

gases emitted (g)

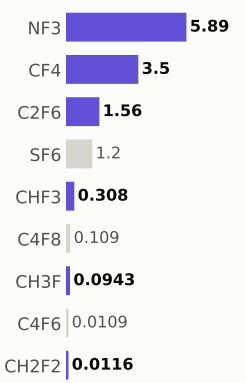

Step #6410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	606.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

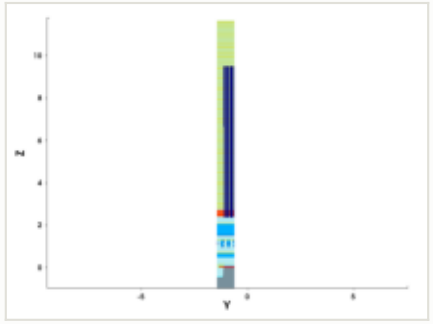

y cut at -1.035 µm

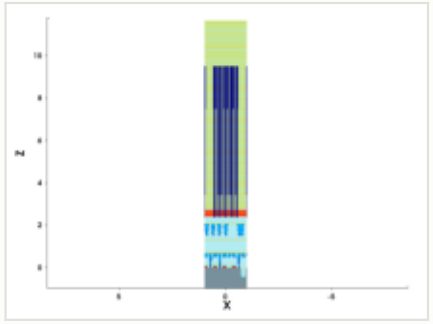

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

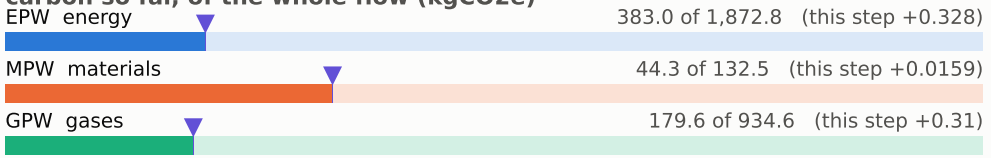

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

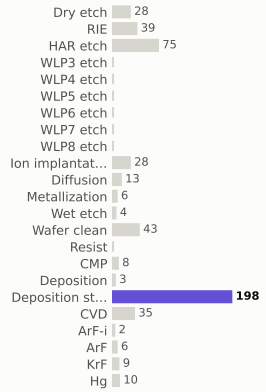

materials deposited (g)

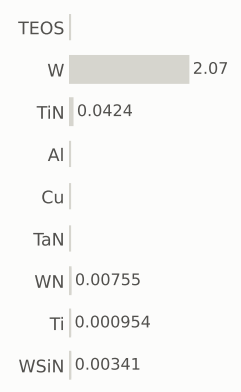

gases emitted (g)

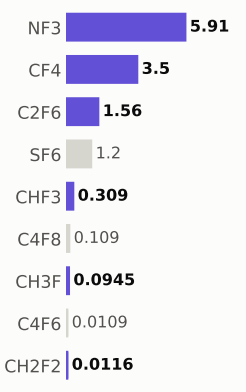

Step #6420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	607.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

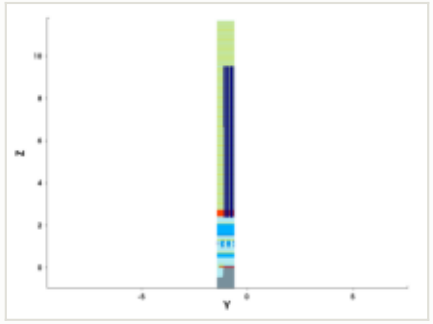

y cut at -1.035 µm

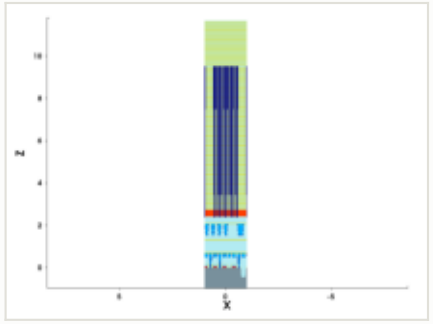

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

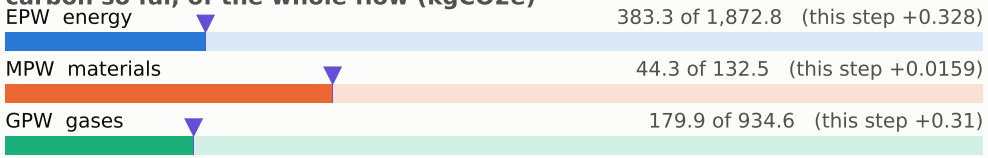

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

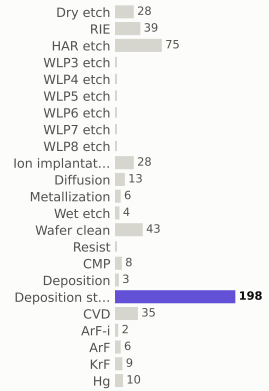

materials deposited (g)

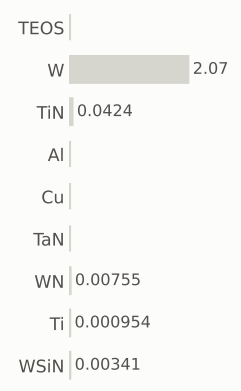

gases emitted (g)

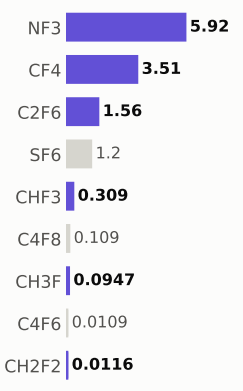

Step #6430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	608.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

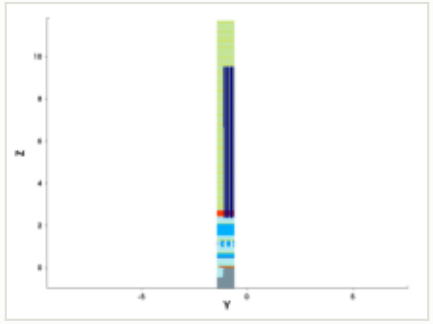

y cut at -1.035 µm

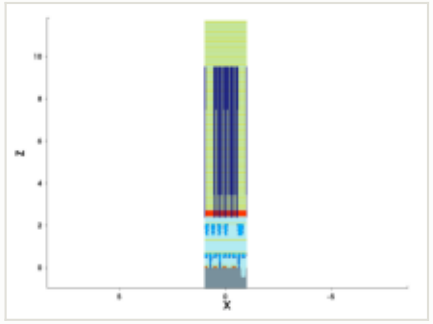

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

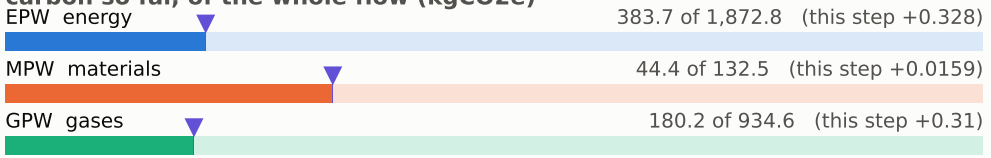

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

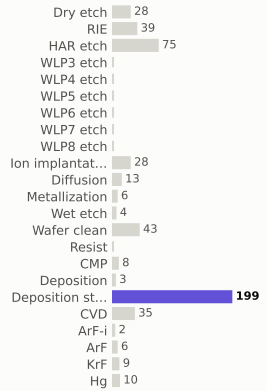

materials deposited (g)

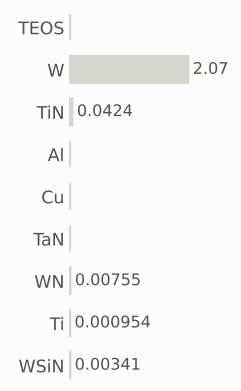

gases emitted (g)

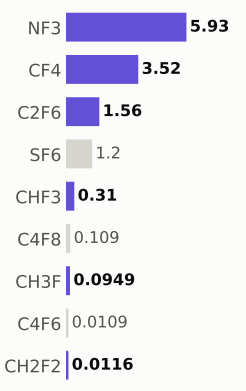

Step #6440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	608.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

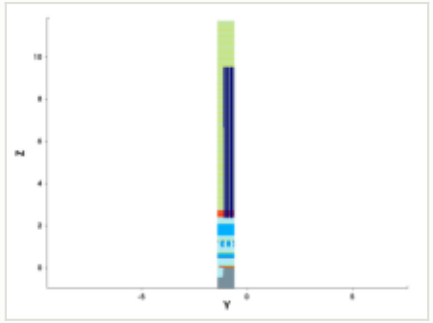

y cut at -1.035 µm

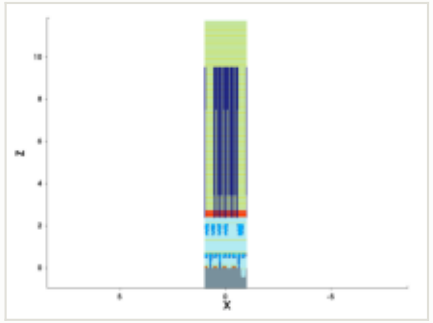

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

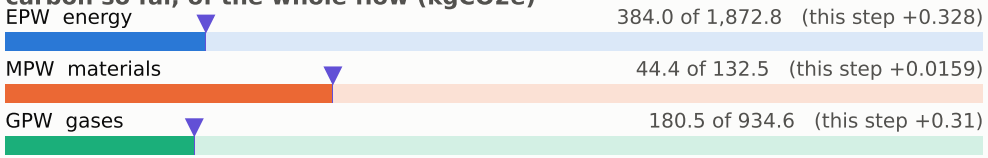

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

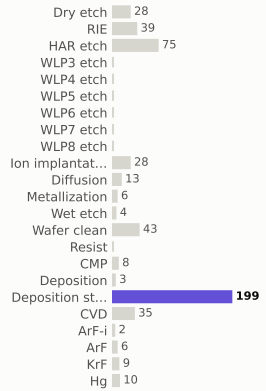

materials deposited (g)

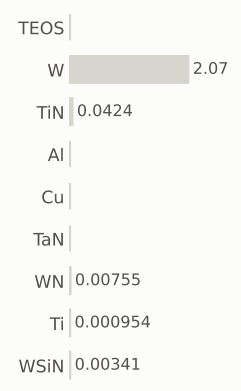

gases emitted (g)

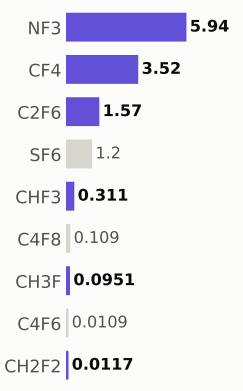

Step #6450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	609.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

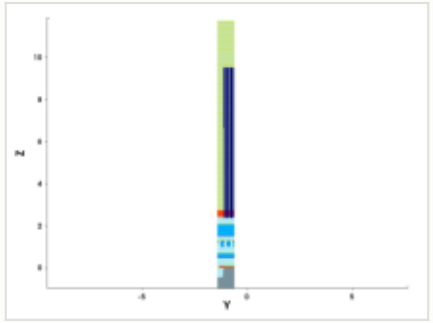

y cut at -1.035 µm

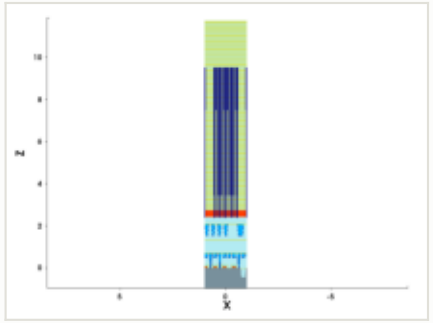

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

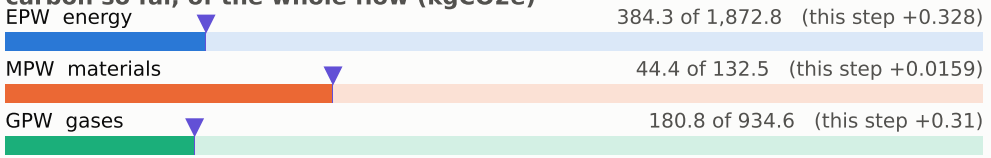

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

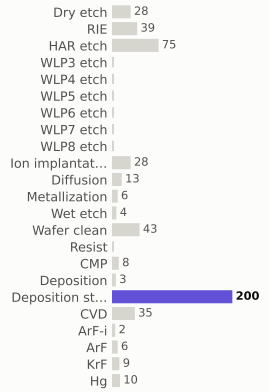

materials deposited (g)

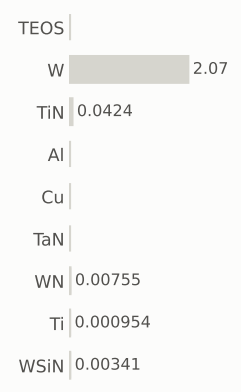

gases emitted (g)

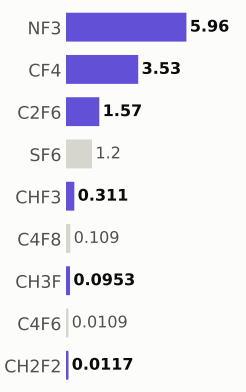

Step #6460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	610.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

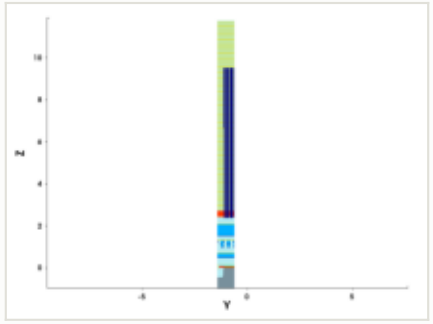

y cut at -1.035 µm

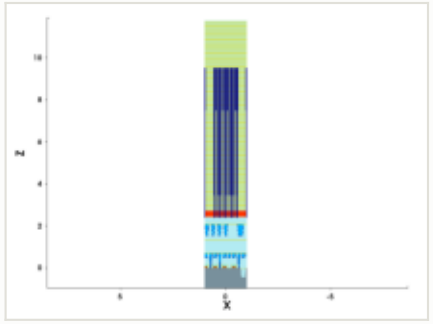

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

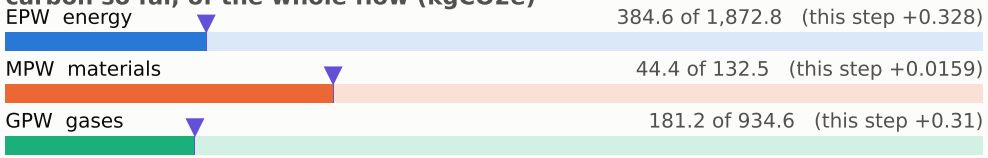

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

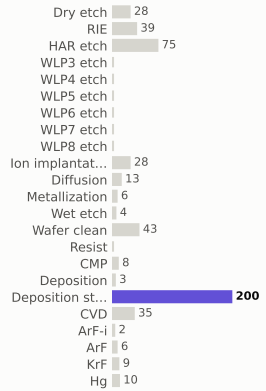

materials deposited (g)

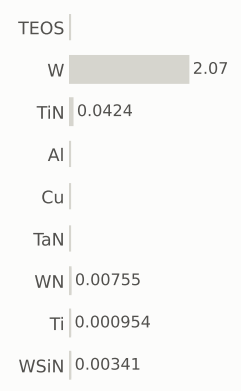

gases emitted (g)

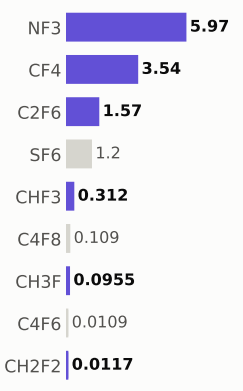

Step #6470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	610.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

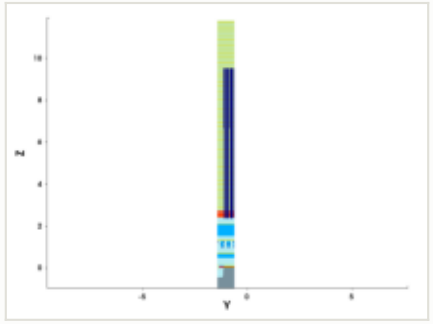

y cut at -1.035 µm

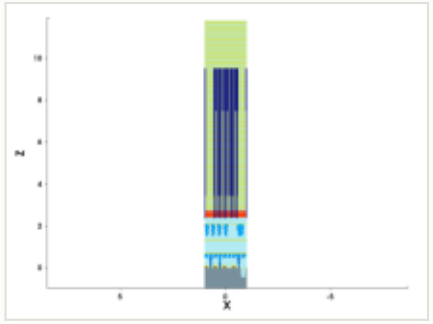

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

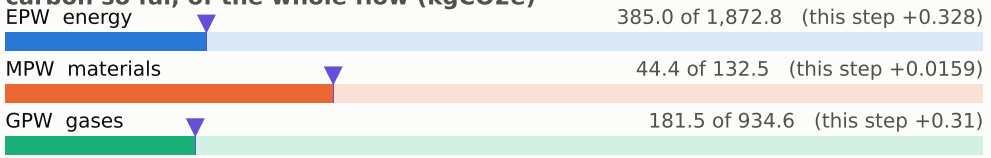

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

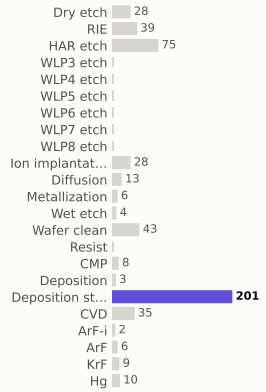

materials deposited (g)

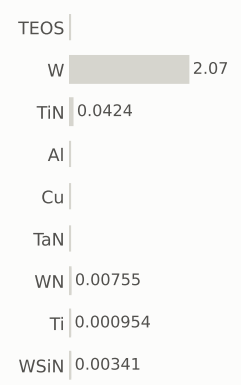

gases emitted (g)

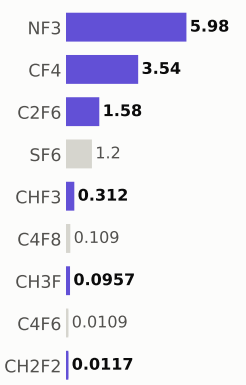

Step #6480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	611.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

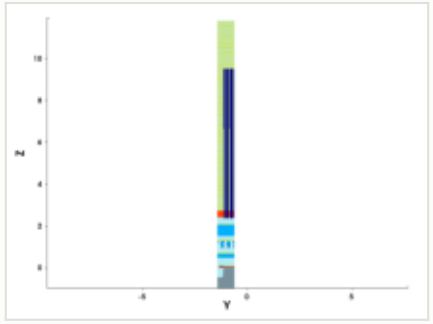

y cut at -1.035 µm

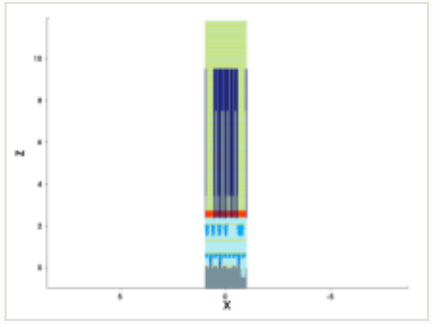

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

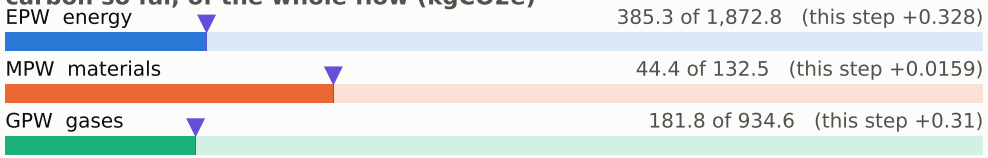

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

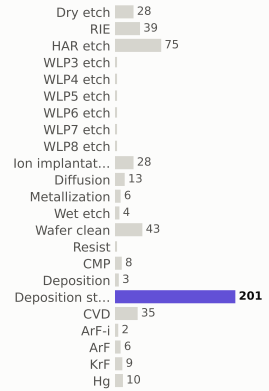

materials deposited (g)

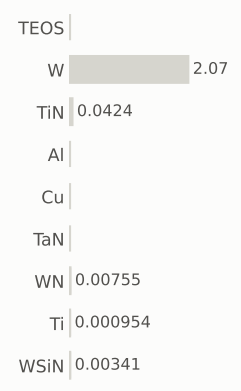

gases emitted (g)

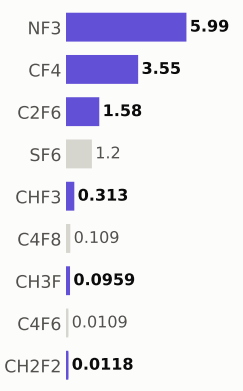

Step #6490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	612.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

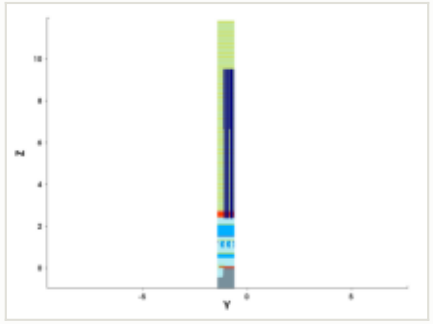

y cut at -1.035 µm

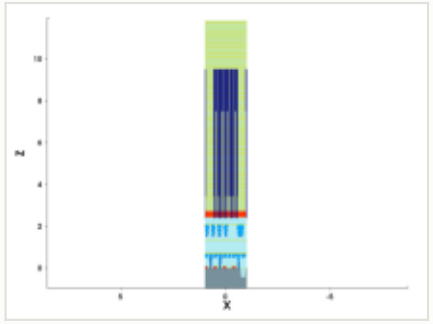

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

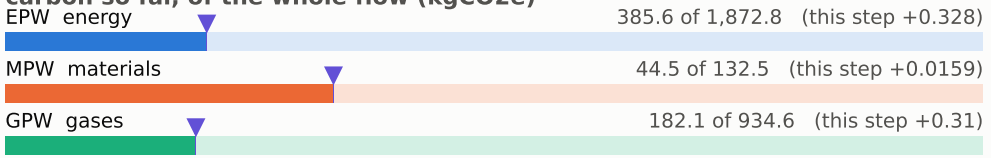

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

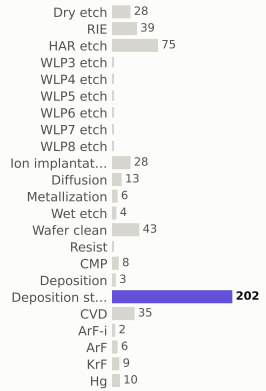

materials deposited (g)

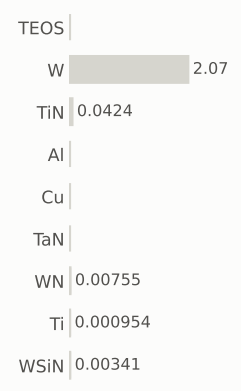

gases emitted (g)

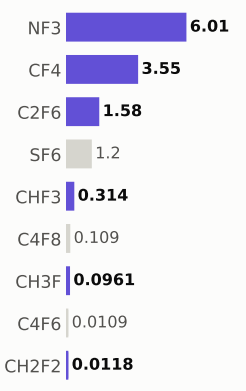

Step #6500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	612.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

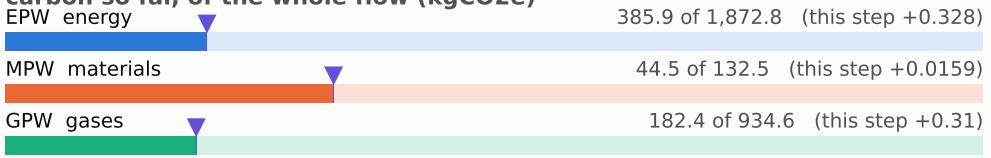

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

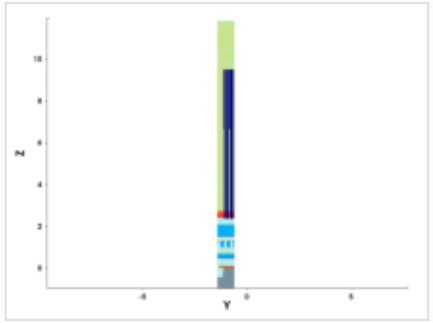

y cut at -1.035 µm

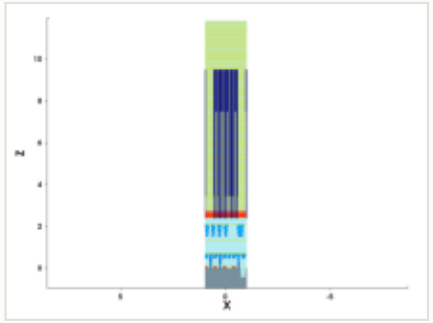

mask for this step

no mask for this step

steps by process area

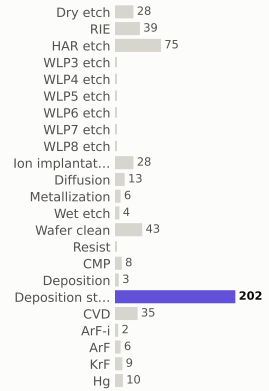

materials deposited (g)

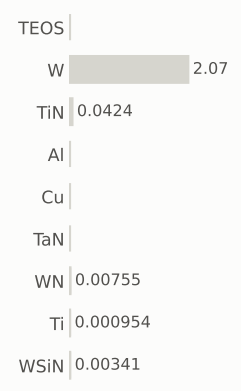

gases emitted (g)

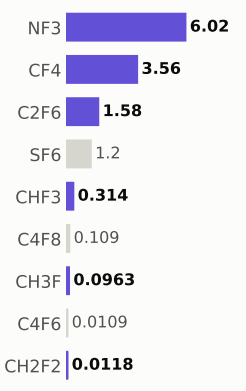

Step #6510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	613.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

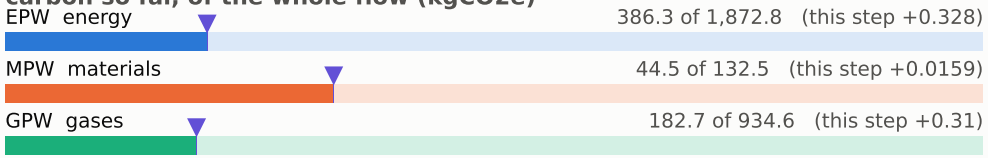

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

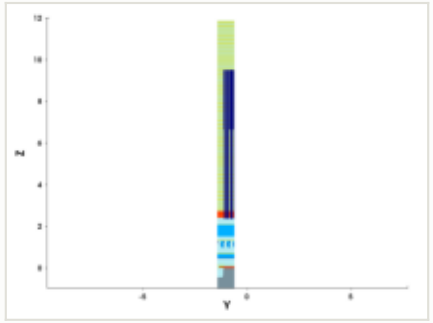

y cut at -1.035 µm

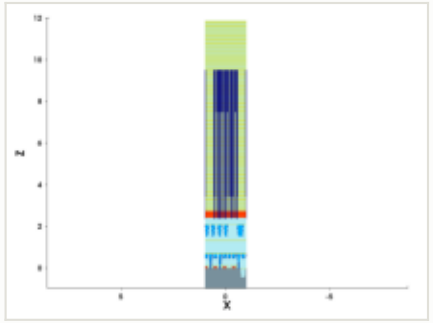

mask for this step

no mask for this step

steps by process area

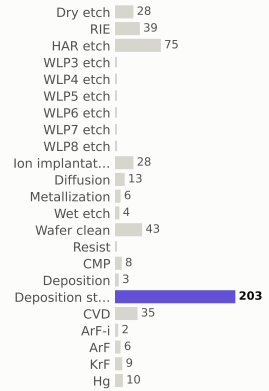

materials deposited (g)

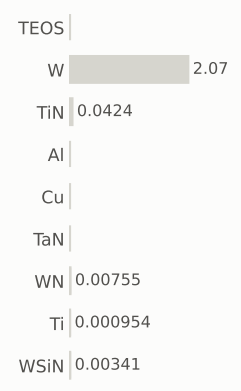

gases emitted (g)

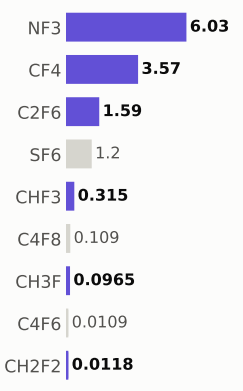

Step #6520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	614.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

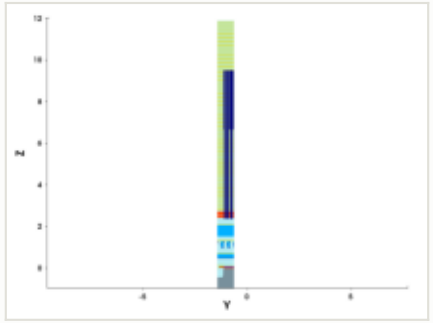

y cut at -1.035 µm

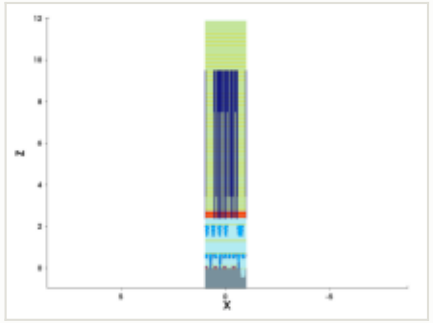

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

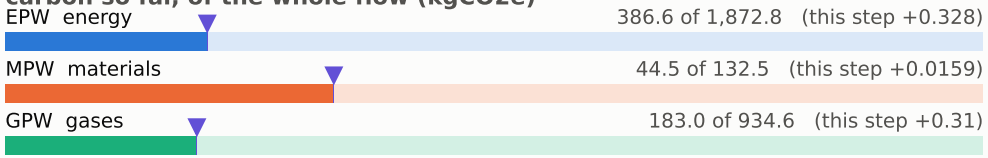

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

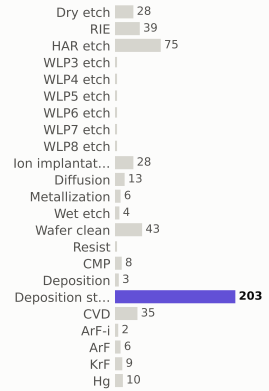

materials deposited (g)

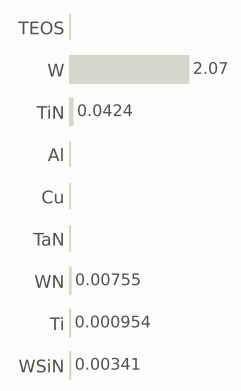

gases emitted (g)

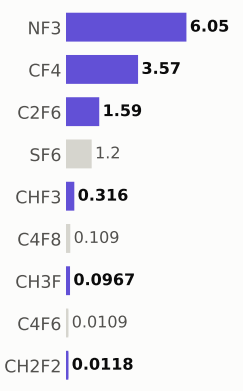

Step #6530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	614.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

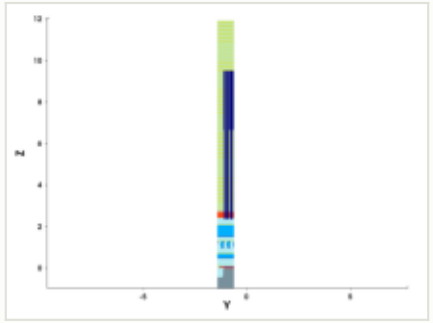

y cut at -1.035 µm

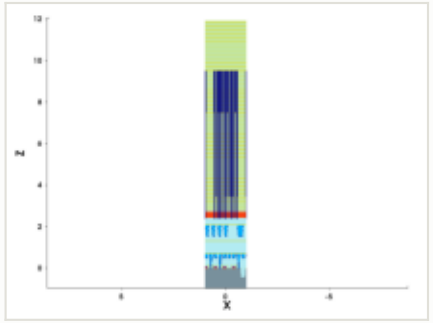

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

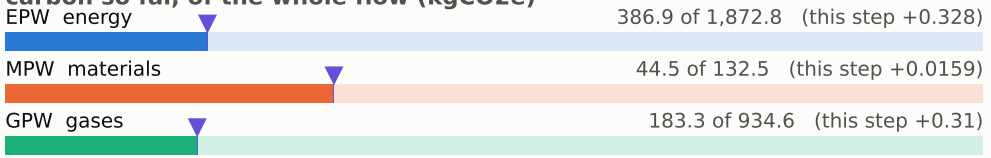

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

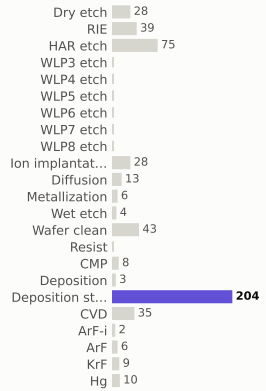

materials deposited (g)

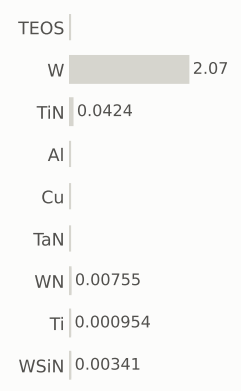

gases emitted (g)

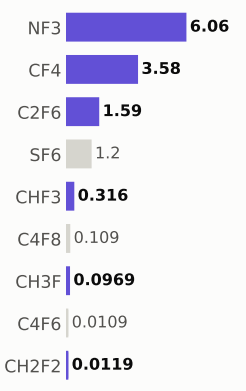

Step #6540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	615.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

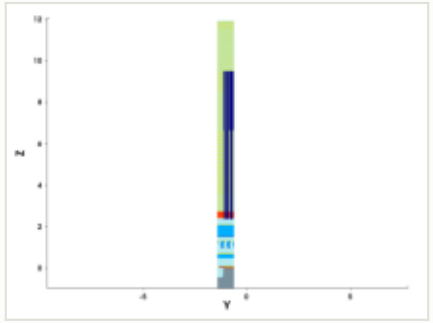

y cut at -1.035 µm

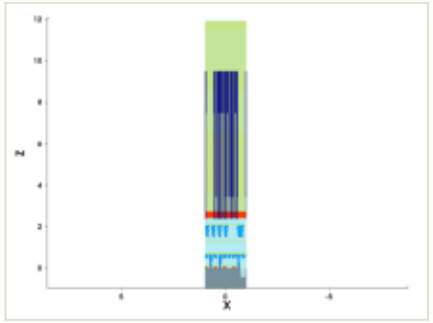

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

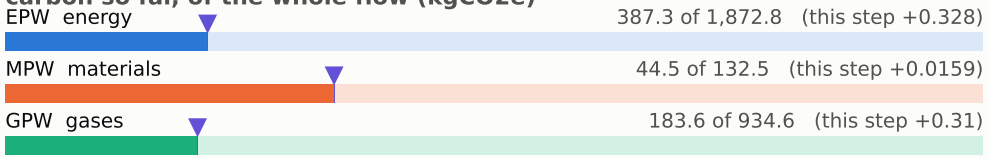

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

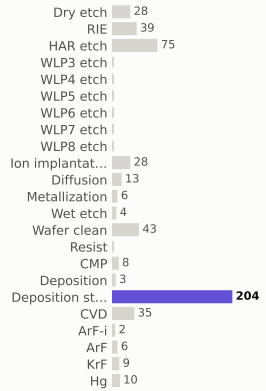

materials deposited (g)

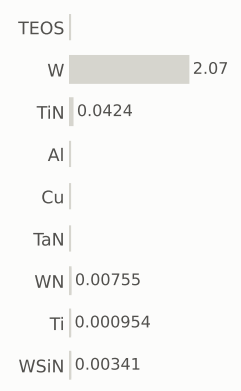

gases emitted (g)

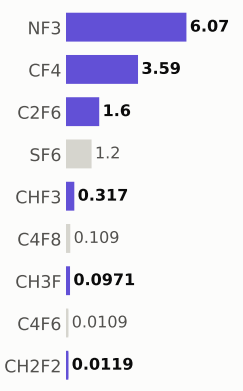

Step #6550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	616.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

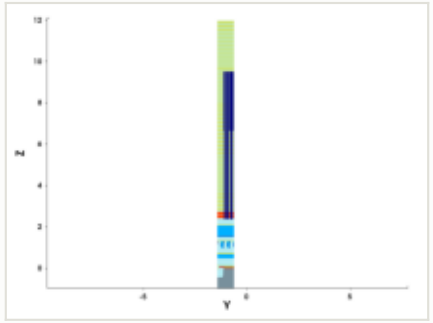

y cut at -1.035 µm

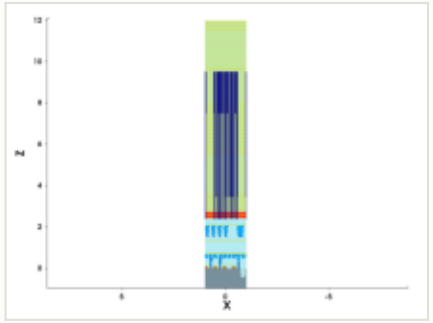

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

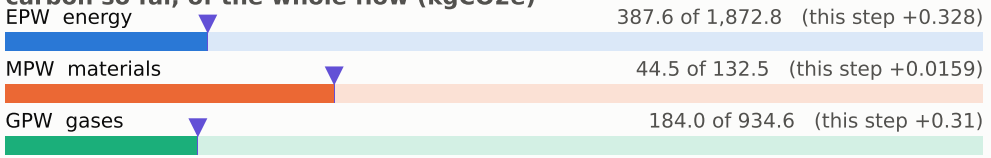

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

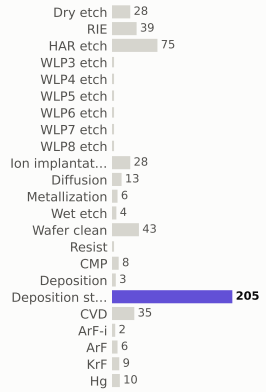

materials deposited (g)

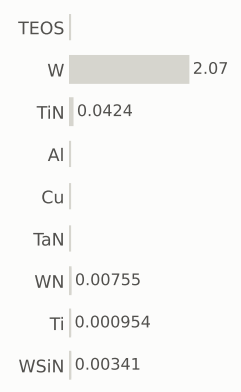

gases emitted (g)

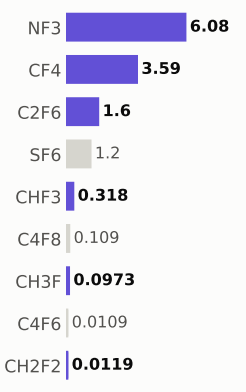

Step #6560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	616.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

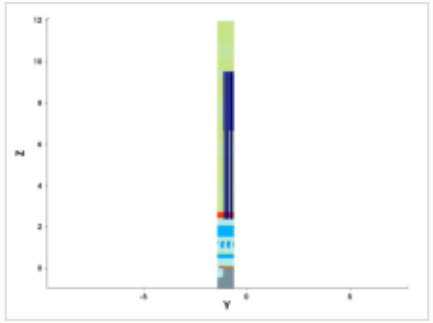

y cut at -1.035 µm

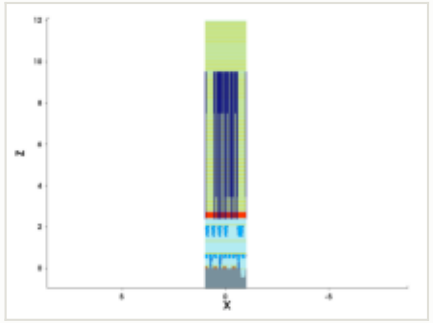

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

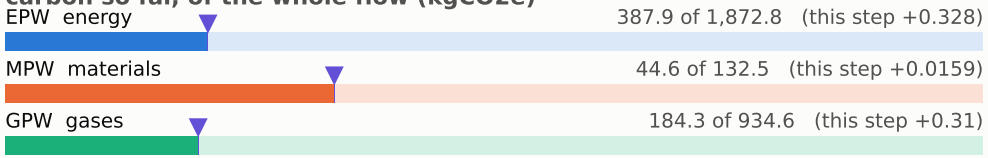

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

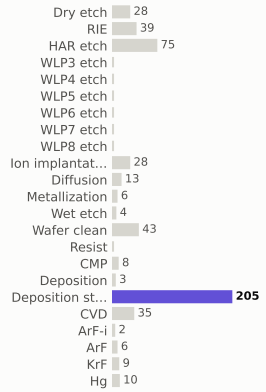

materials deposited (g)

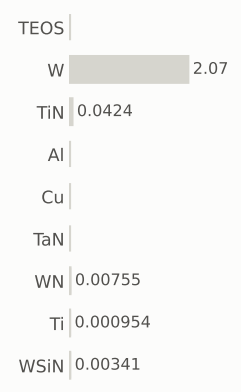

gases emitted (g)



Step #6570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	617.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

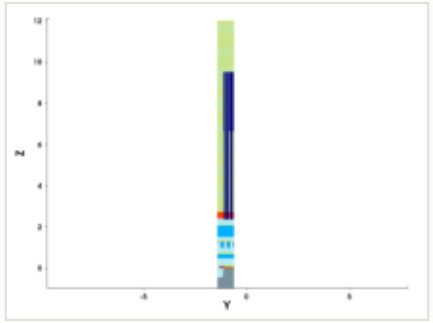

y cut at -1.035 µm

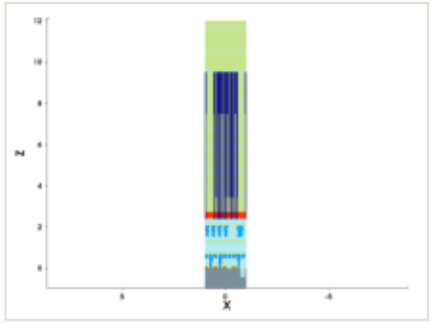

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

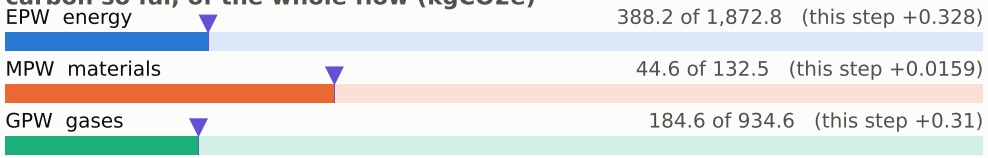

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

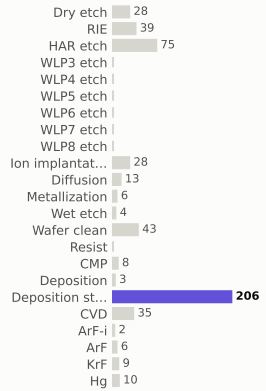

materials deposited (g)

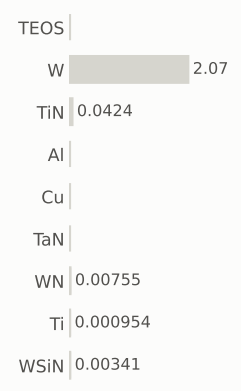

gases emitted (g)

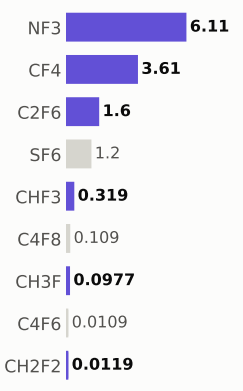

Step #6580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	618.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

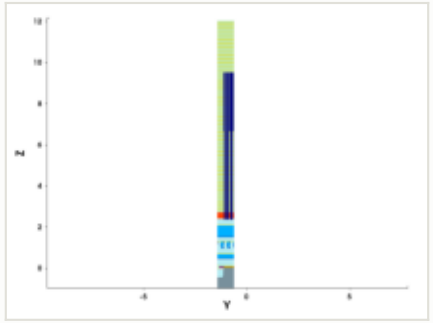

y cut at -1.035 µm

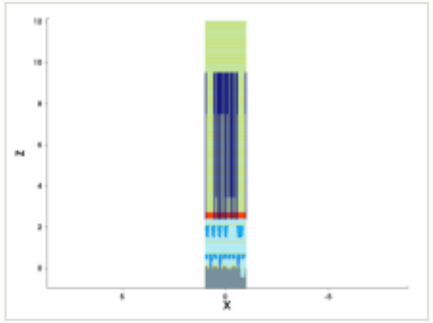

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

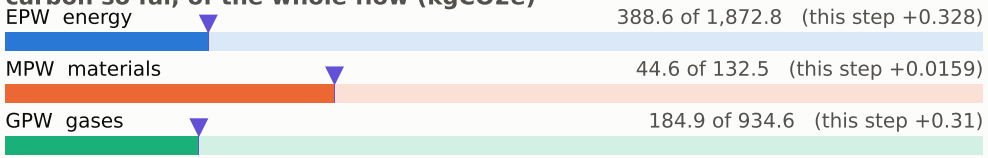

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

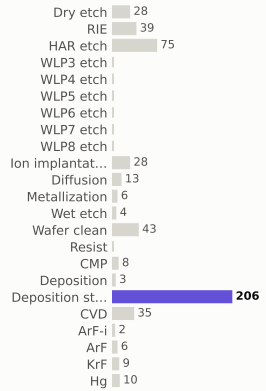

materials deposited (g)

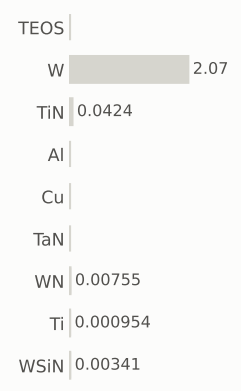

gases emitted (g)

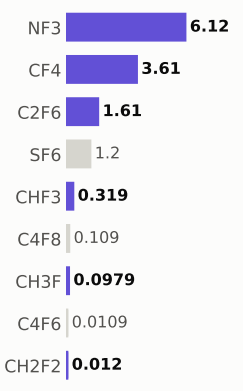

Step #6590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	618.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

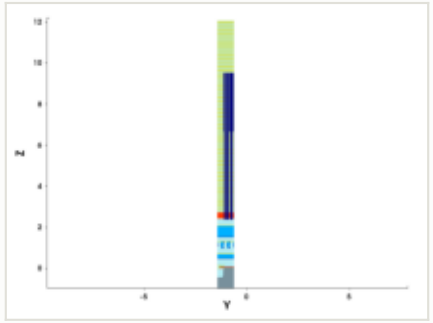

y cut at -1.035 µm

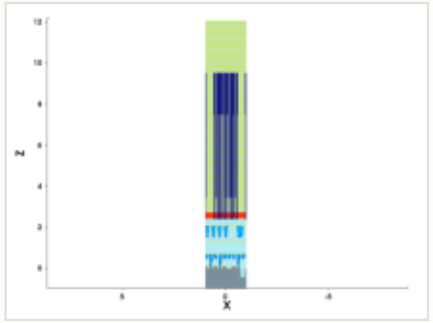

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

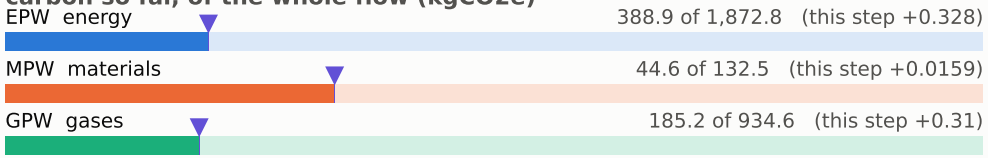

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

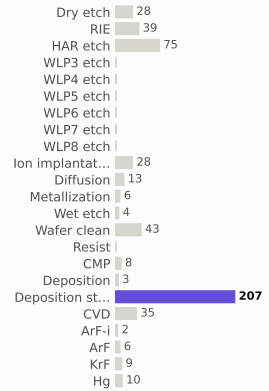

materials deposited (g)

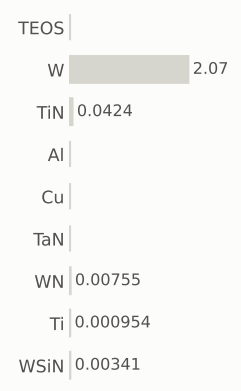

gases emitted (g)

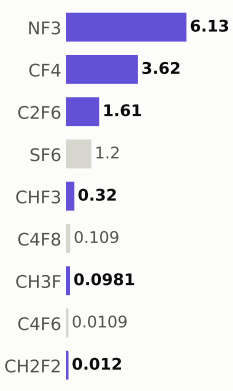

Step #6600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	619.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

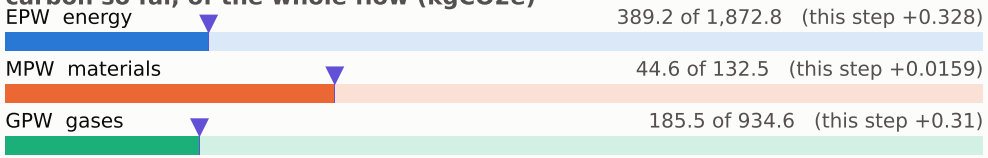

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

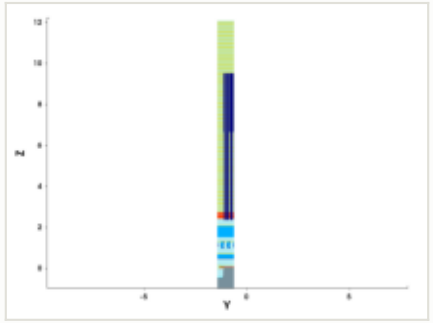

y cut at -1.035 µm

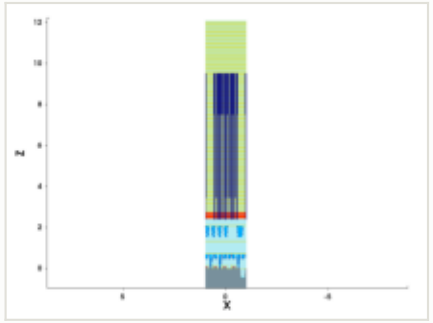

mask for this step

no mask for this step

steps by process area

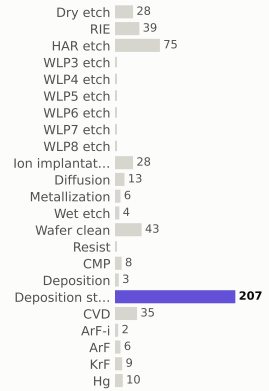

materials deposited (g)

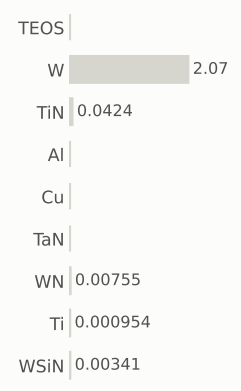

gases emitted (g)



Step #6610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	620.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

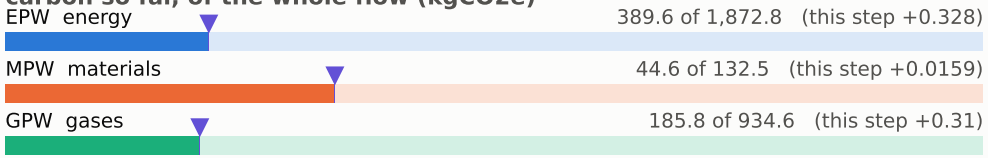

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

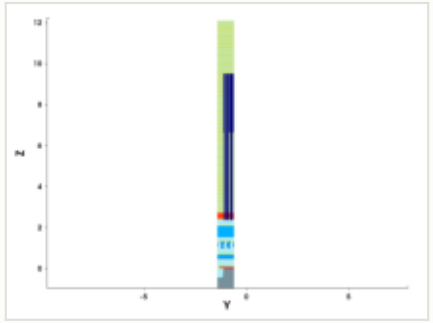

y cut at -1.035 µm

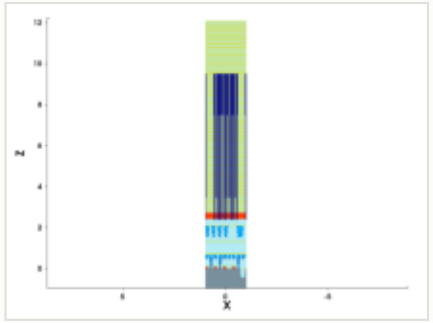

mask for this step

no mask for this step

steps by process area

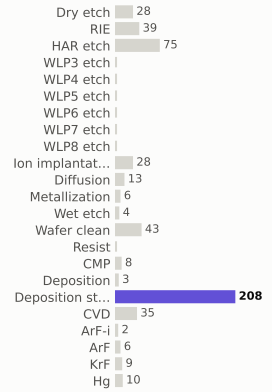

materials deposited (g)

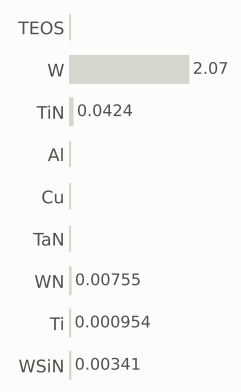

gases emitted (g)

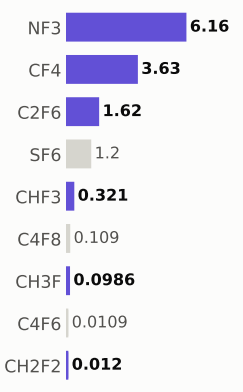

Step #6620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	620.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

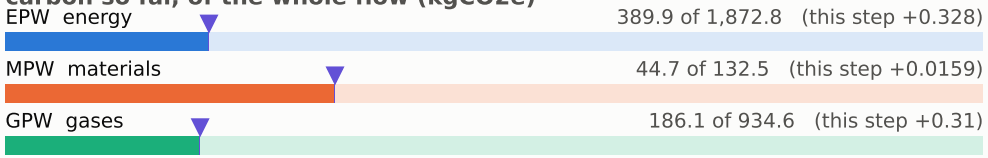

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

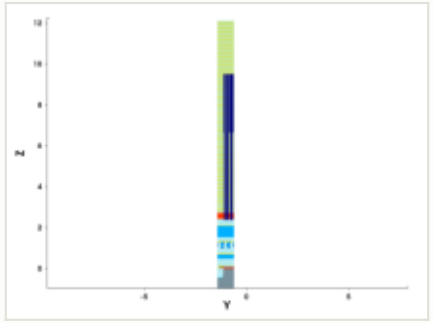

y cut at -1.035 µm

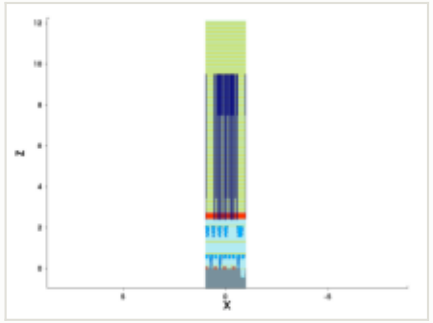

mask for this step

no mask for this step

steps by process area

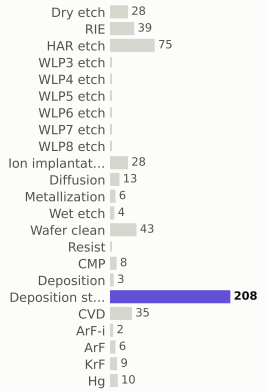

materials deposited (g)

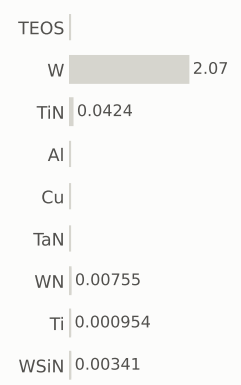

gases emitted (g)

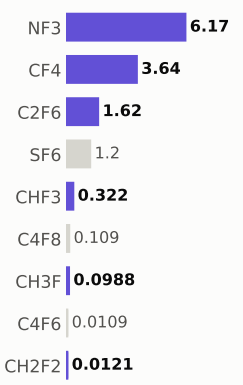

Step #6630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	621.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

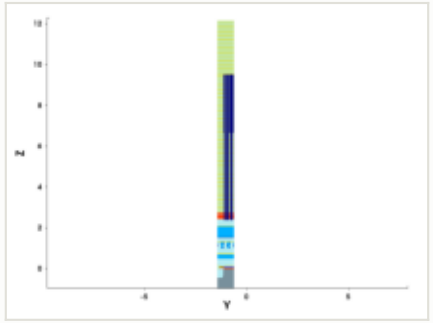

y cut at -1.035 µm

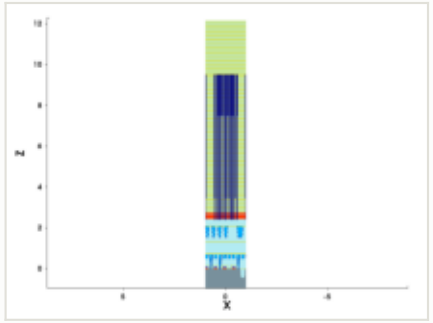

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

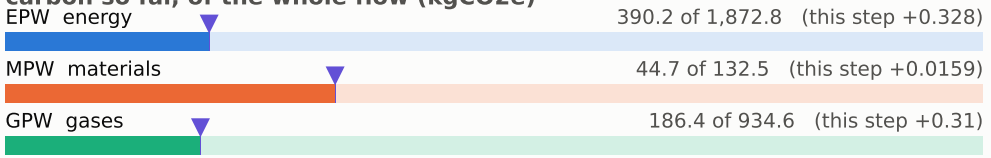

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

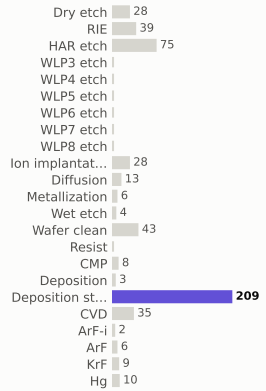

materials deposited (g)

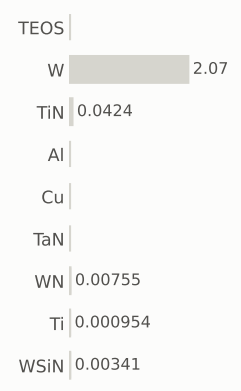

gases emitted (g)

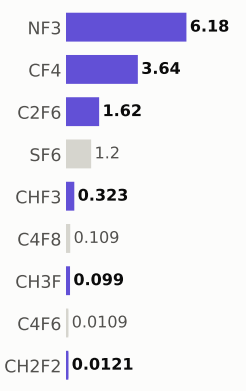

Step #6640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	622.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

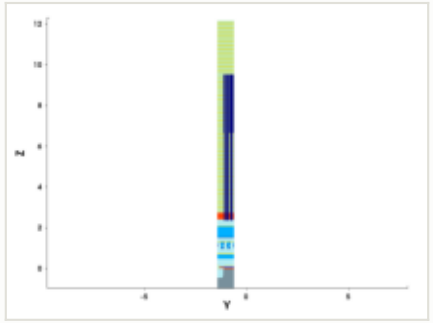

y cut at -1.035 µm

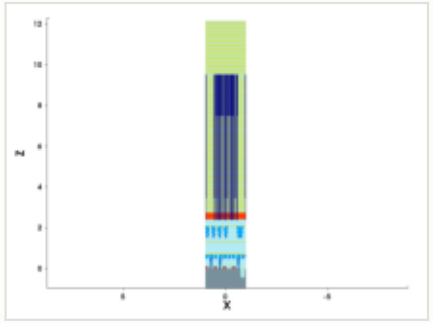

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

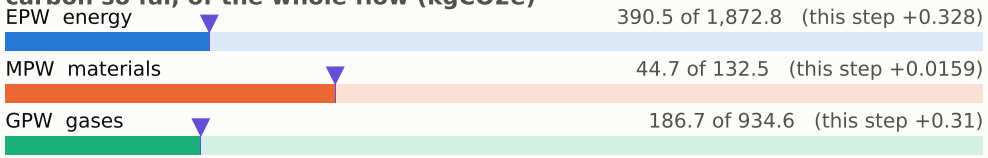

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

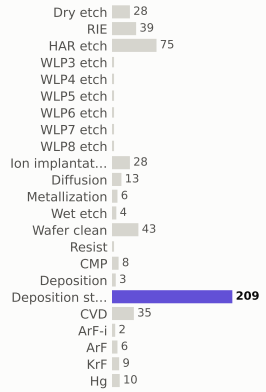

materials deposited (g)

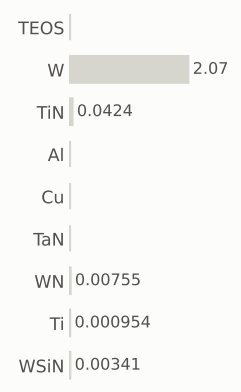

gases emitted (g)



Step #6650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	622.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

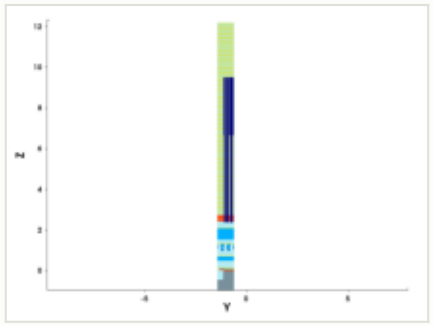

y cut at -1.035 µm

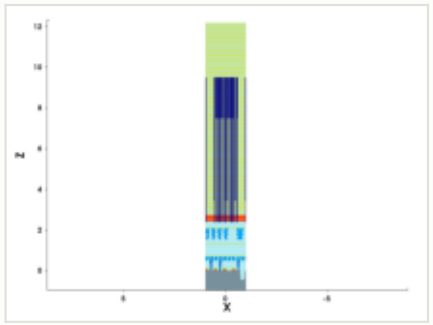

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

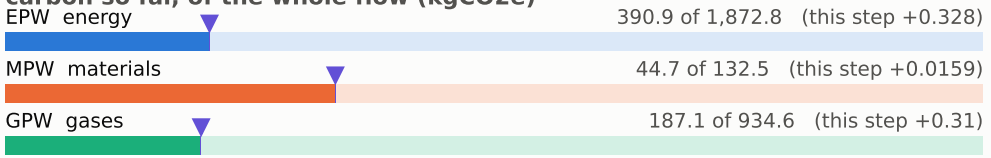

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

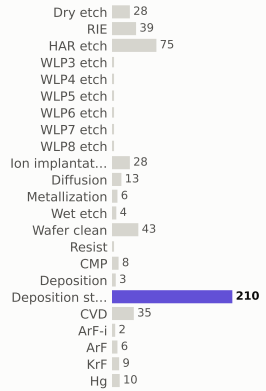

materials deposited (g)

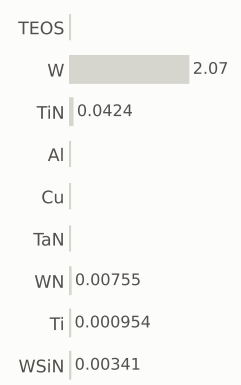

gases emitted (g)

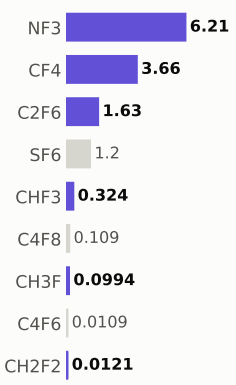

Step #6660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	623.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

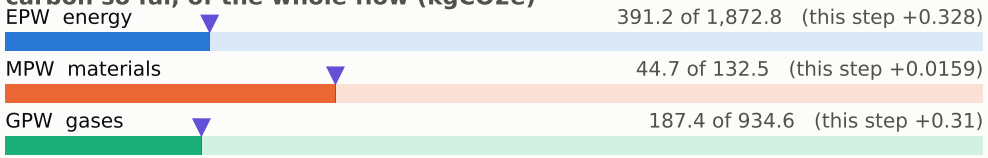

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

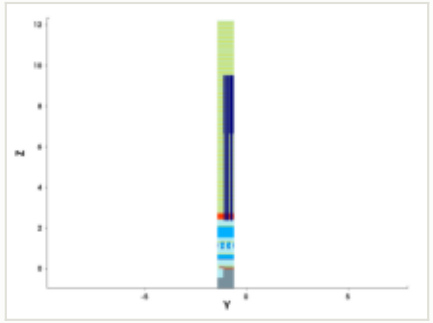

y cut at -1.035 µm

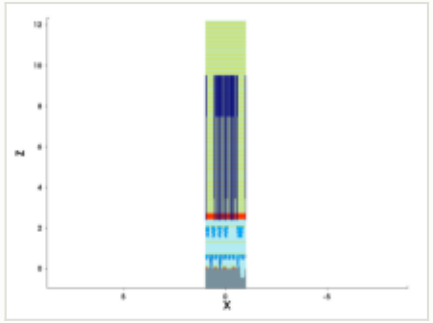

mask for this step

no mask for this step

steps by process area

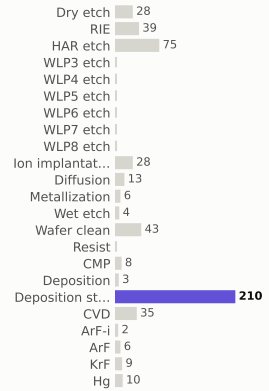

materials deposited (g)

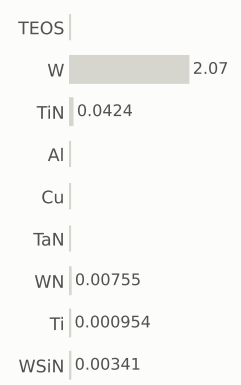

gases emitted (g)

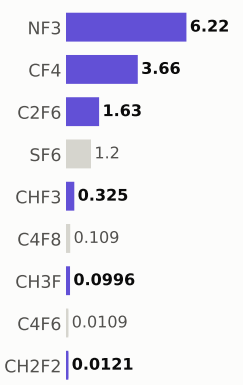

Step #6670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	623.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

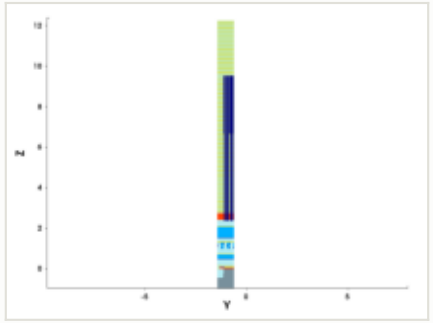

y cut at -1.035 µm

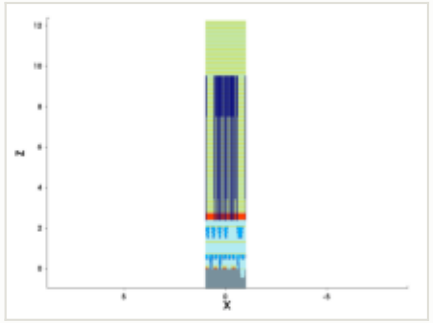

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

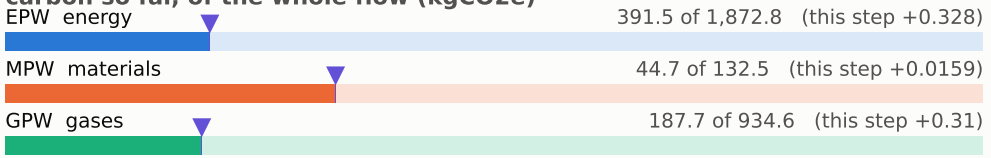

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

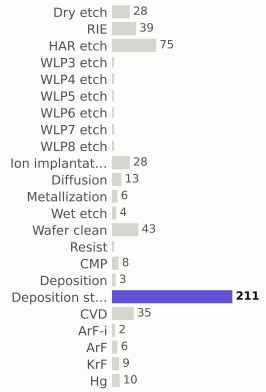

materials deposited (g)

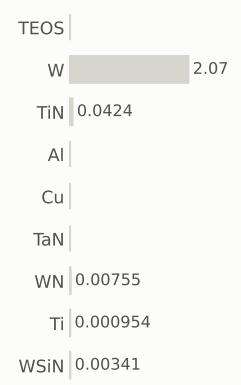

gases emitted (g)

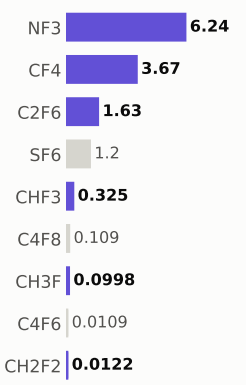

Step #6680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	624.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

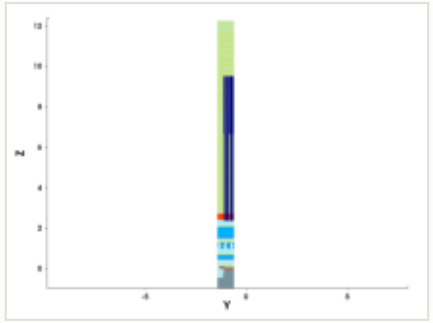

y cut at -1.035 µm

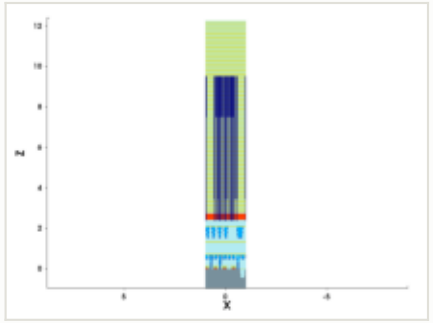

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

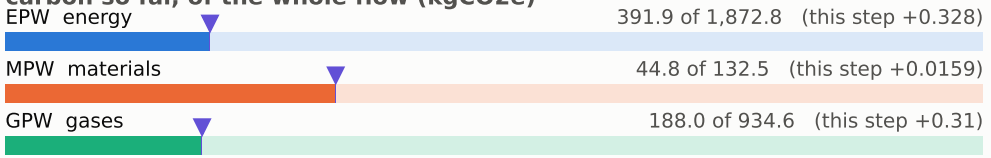

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

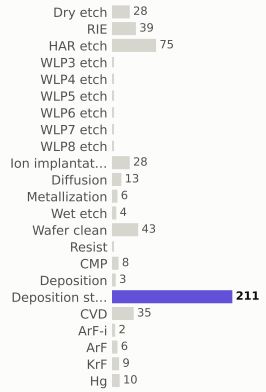

materials deposited (g)

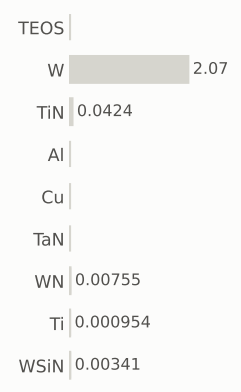

gases emitted (g)

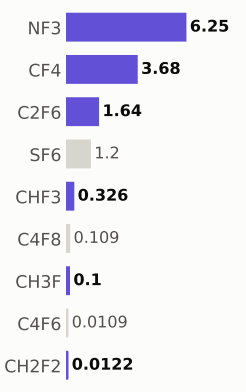

Step #6690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	625.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

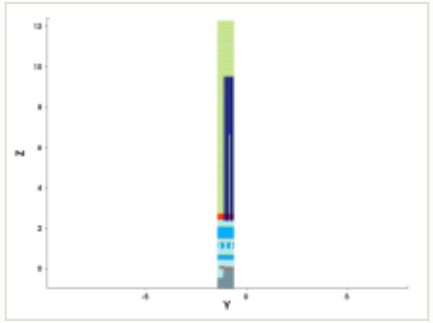

y cut at -1.035 µm

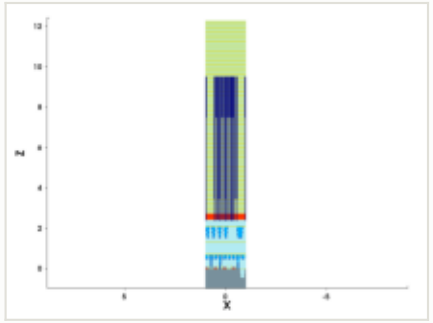

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

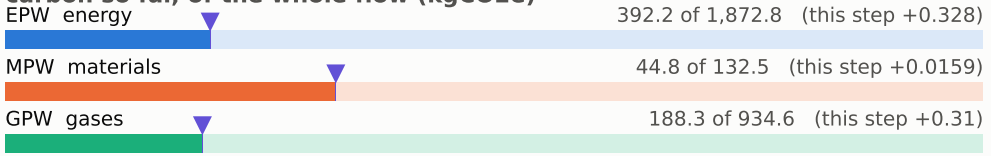

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

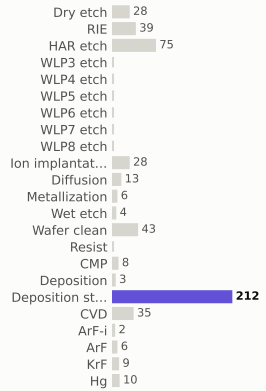

materials deposited (g)

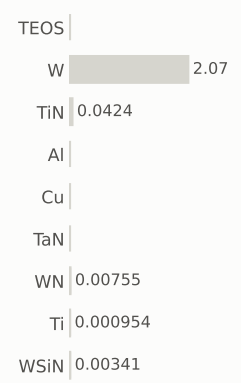

gases emitted (g)

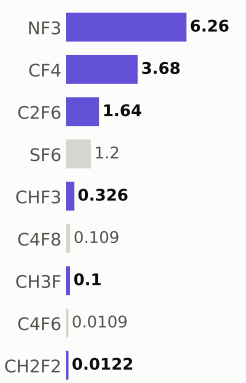

Step #6700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	625.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

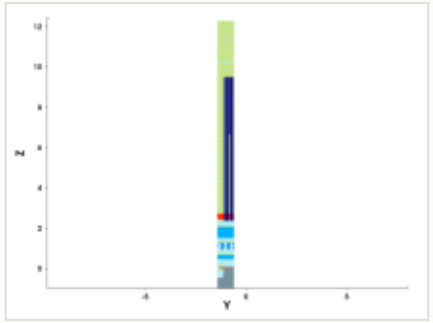

y cut at -1.035 µm

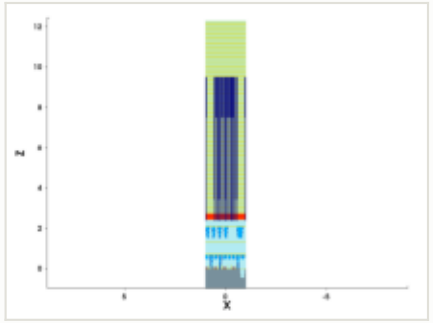

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

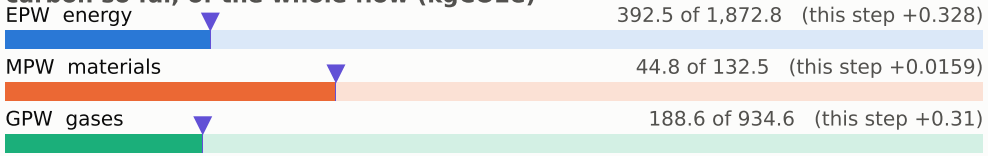

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

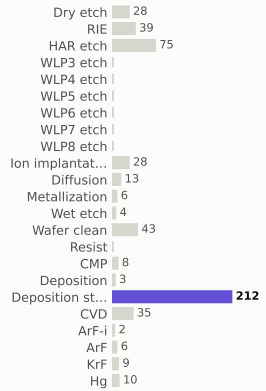

materials deposited (g)

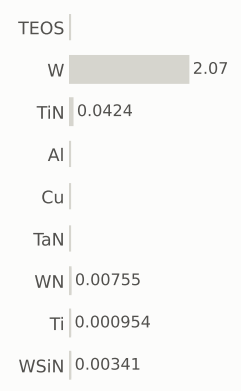

gases emitted (g)

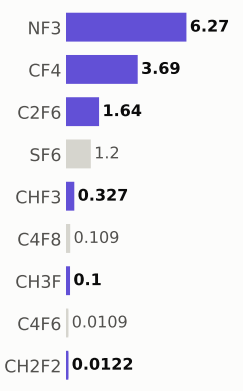

Step #6710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	626.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

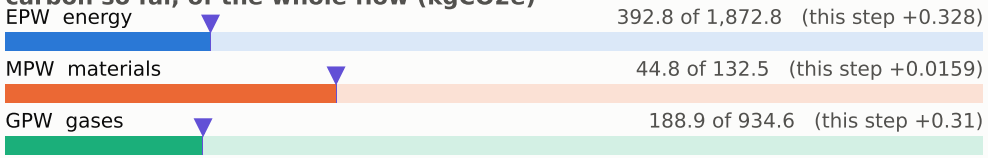

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

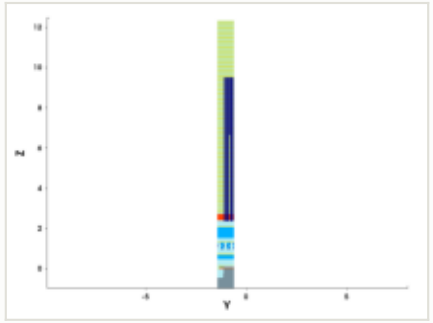

y cut at -1.035 µm

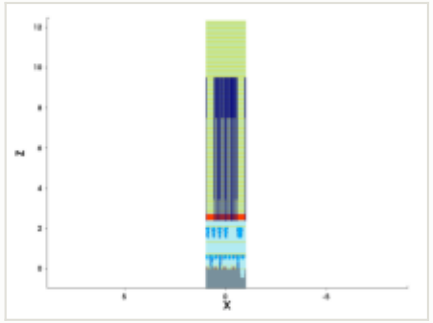

mask for this step

no mask for this step

steps by process area

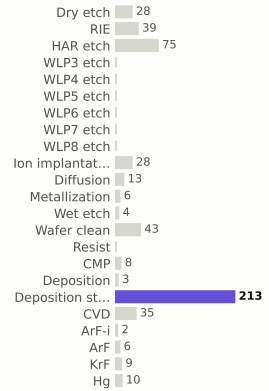

materials deposited (g)

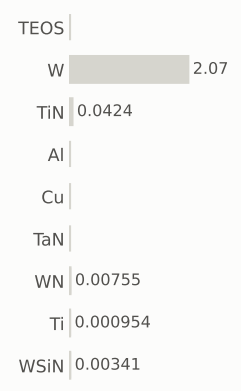

gases emitted (g)

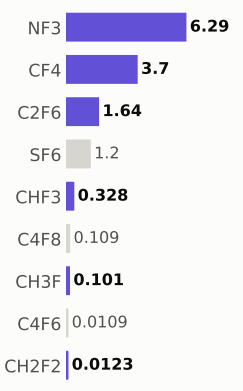

Step #6720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	627.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

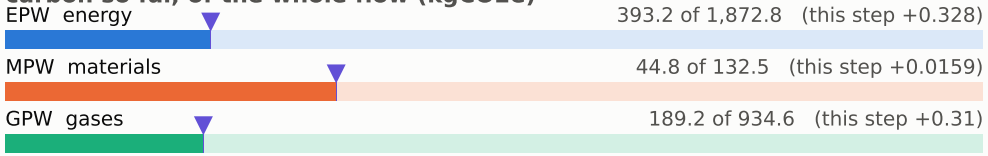

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

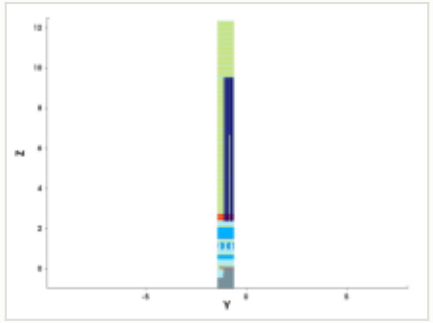

y cut at -1.035 µm

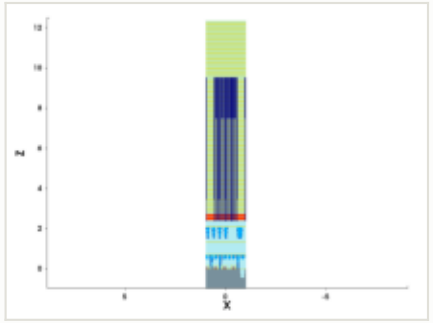

mask for this step

no mask for this step

steps by process area

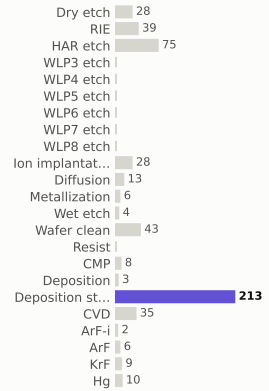

materials deposited (g)

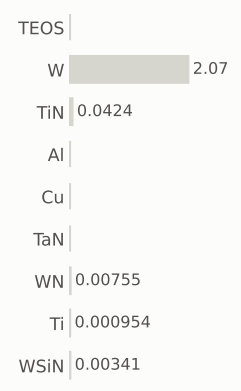

gases emitted (g)

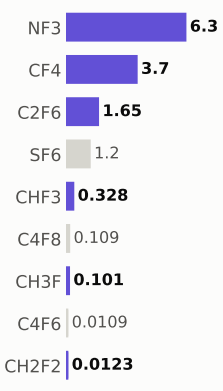

Step #6730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	627.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

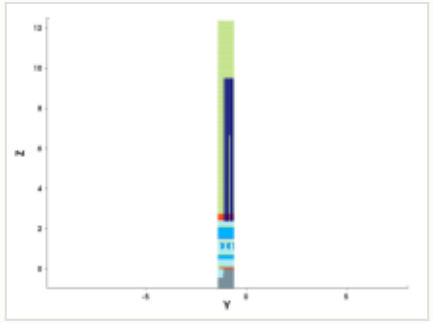

y cut at -1.035 µm

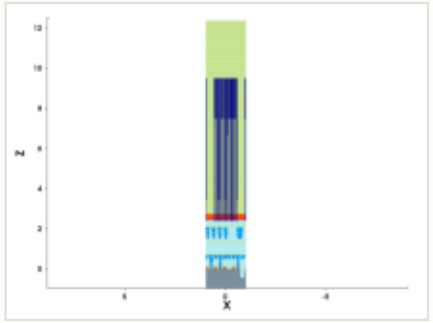

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

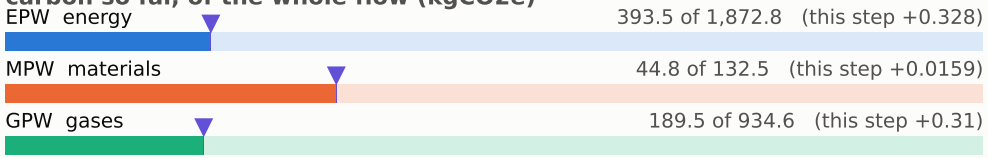

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

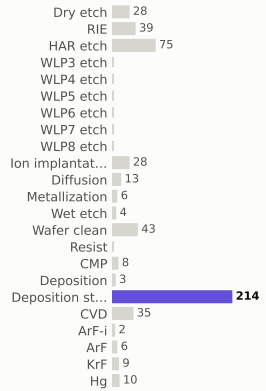

materials deposited (g)

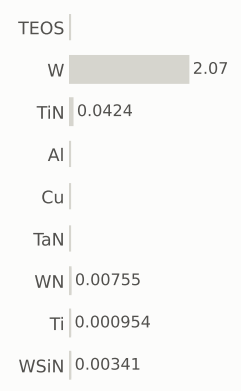

gases emitted (g)

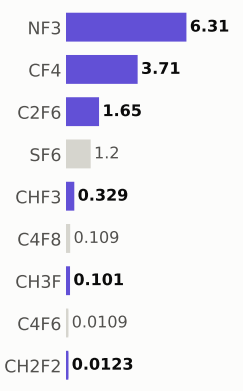

Step #6740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	628.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

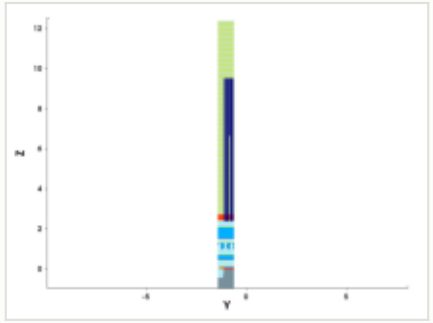

y cut at -1.035 µm

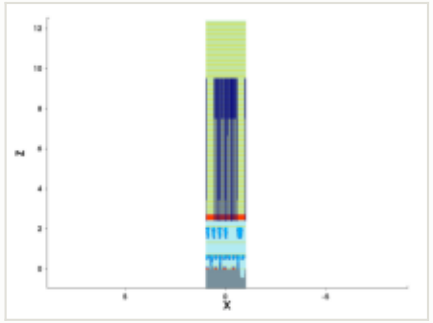

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

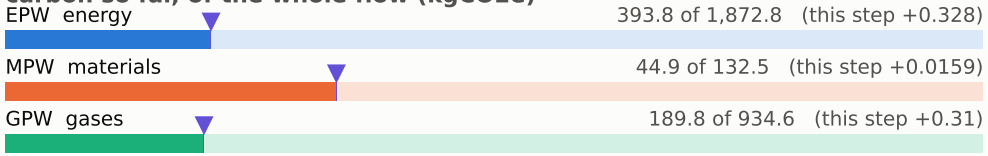

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

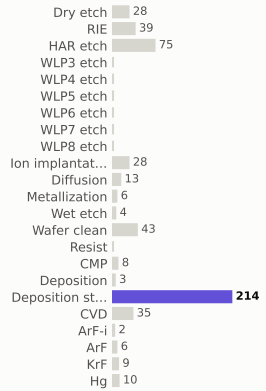

materials deposited (g)

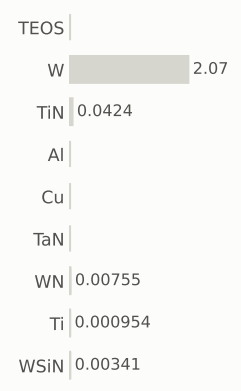

gases emitted (g)

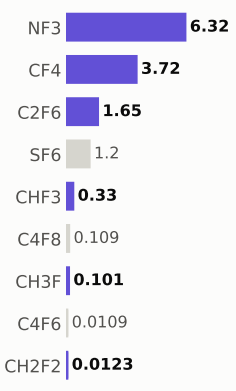

Step #6750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	629.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

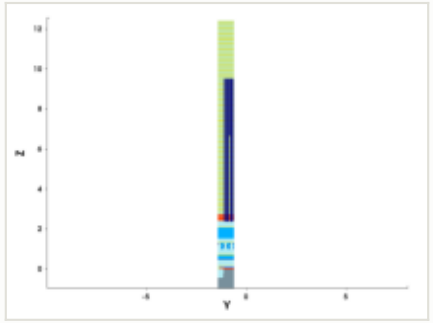

y cut at -1.035 µm

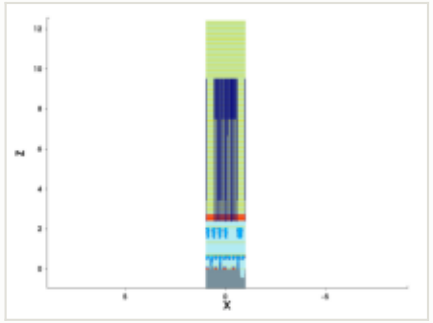

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

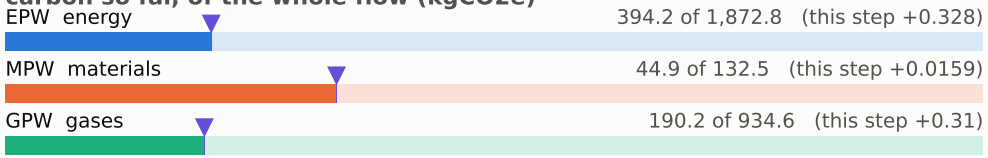

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

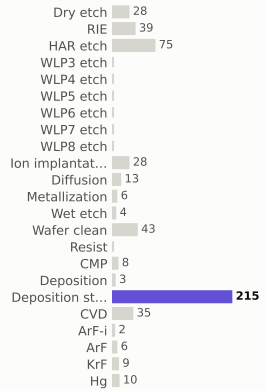

materials deposited (g)

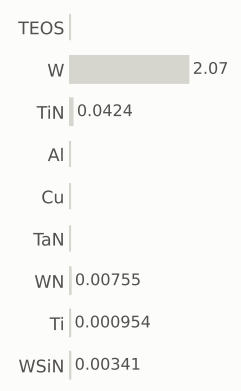

gases emitted (g)

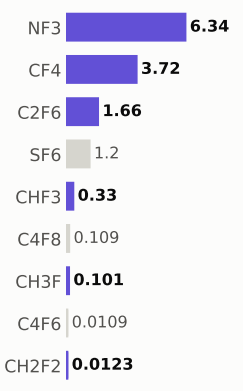

Step #6760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	629.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

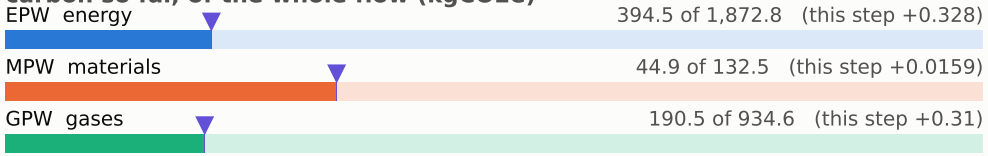

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

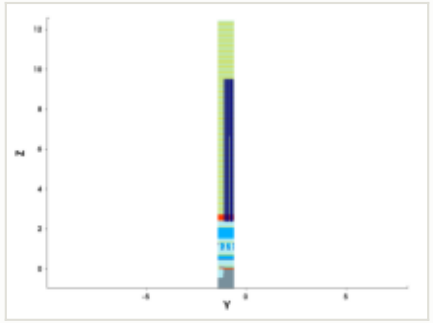

y cut at -1.035 µm

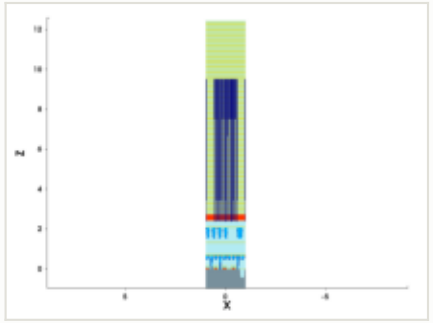

mask for this step

no mask for this step

steps by process area

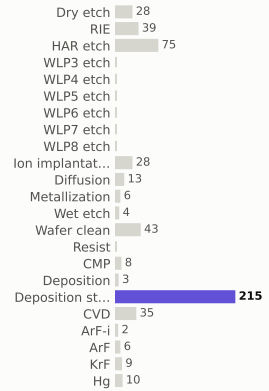

materials deposited (g)

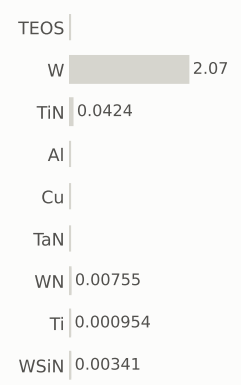

gases emitted (g)

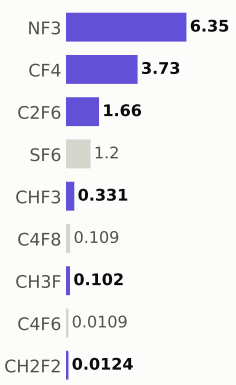

Step #6770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	630.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

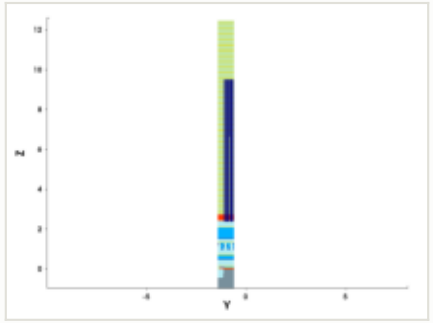

y cut at -1.035 µm

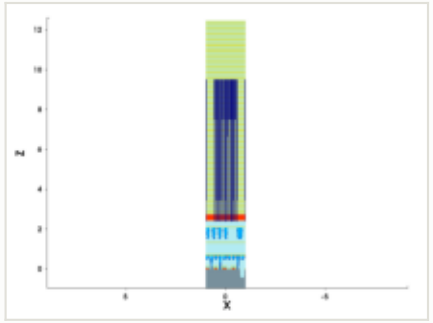

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

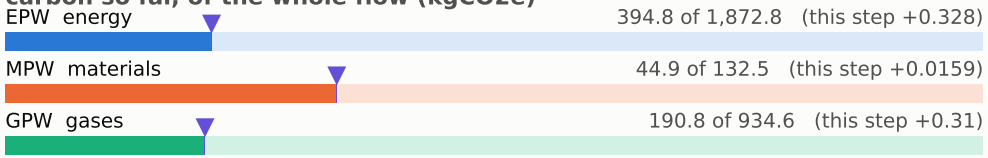

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

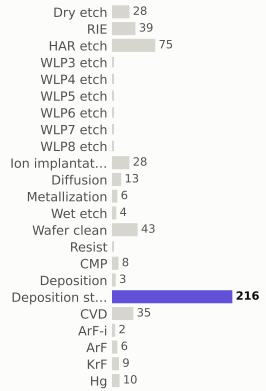

materials deposited (g)

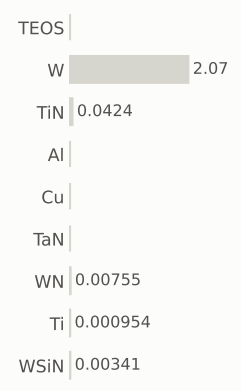

gases emitted (g)

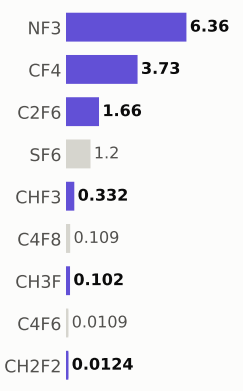

Step #6780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	631.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

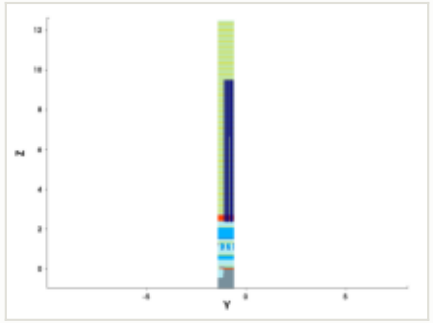

y cut at -1.035 µm

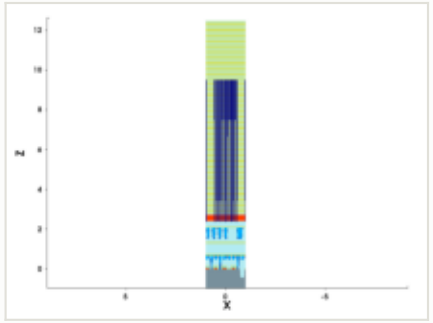

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

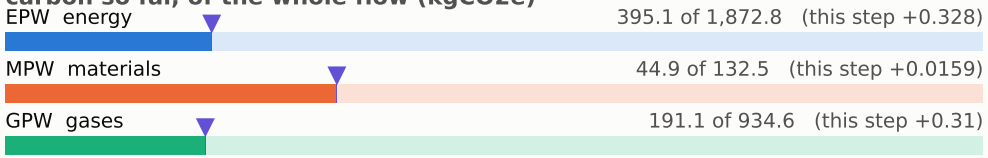

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

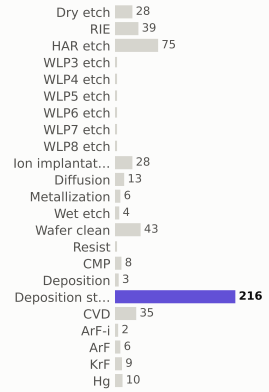

materials deposited (g)

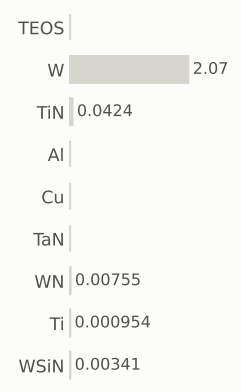

gases emitted (g)

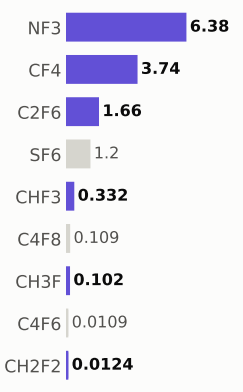

Step #6790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	631.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 395.5 of 1,872.8 (this step +0.328)

MPW materials — 44.9 of 132.5 (this step +0.0159)

GPW gases — 191.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

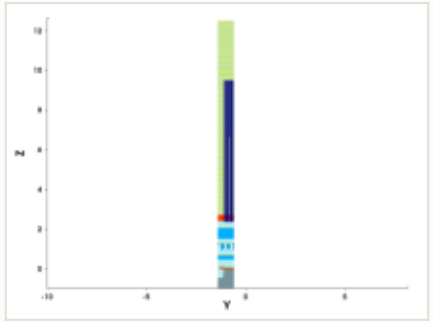

y cut at -1.035 µm

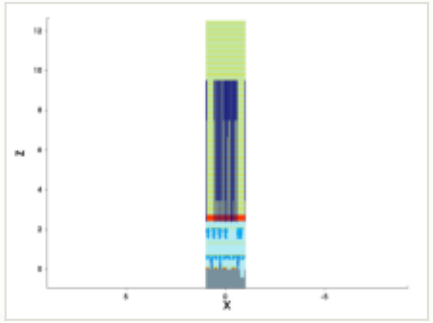

mask for this step

no mask for this step

steps by process area

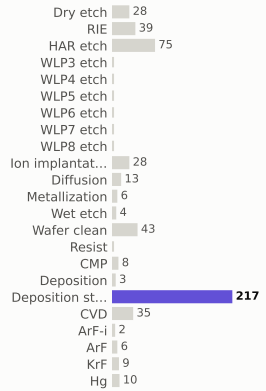

materials deposited (g)

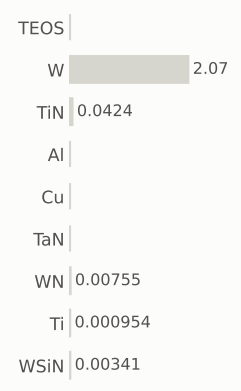

gases emitted (g)

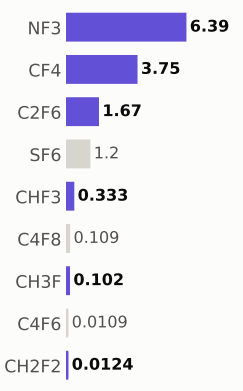

Step #6800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	632.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

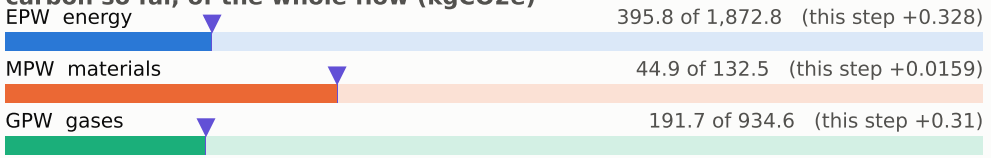

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

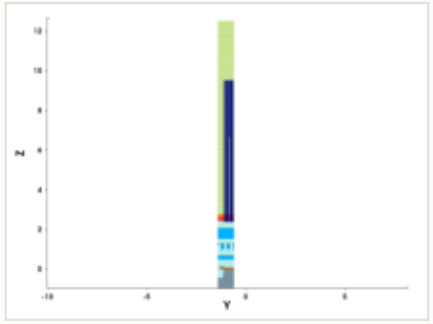

y cut at -1.035 µm

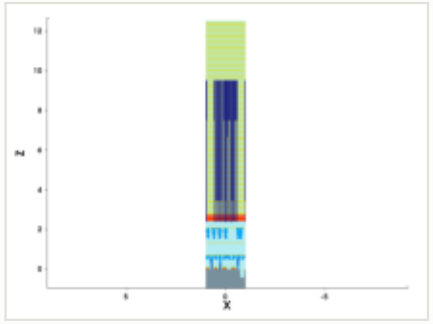

mask for this step

no mask for this step

steps by process area

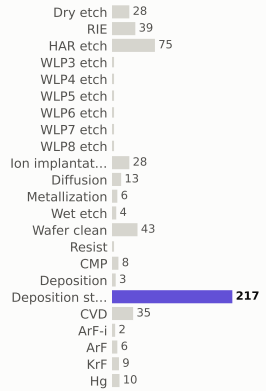

materials deposited (g)

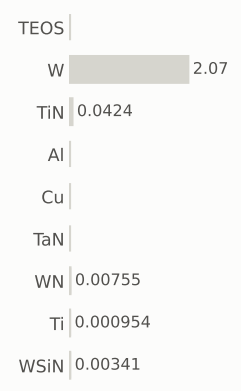

gases emitted (g)



Step #6810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	633.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

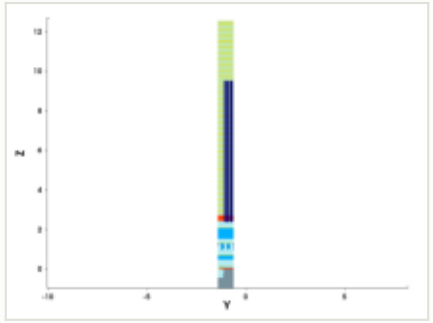

y cut at -1.035 µm

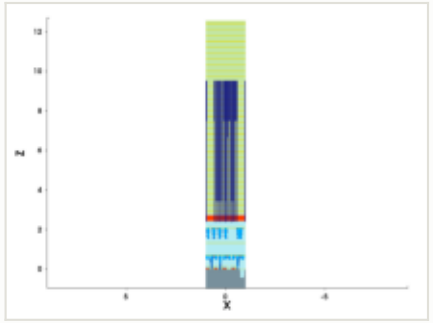

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

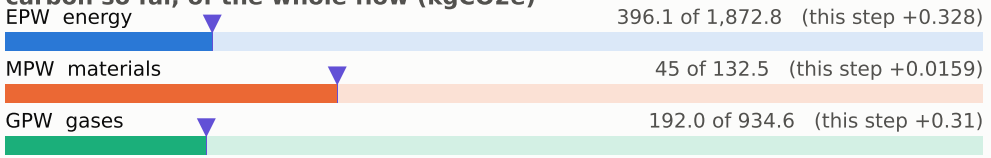

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

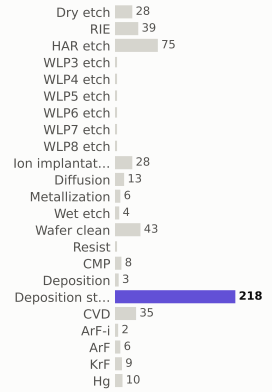

materials deposited (g)

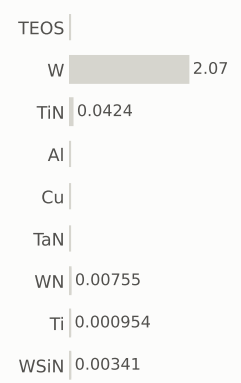

gases emitted (g)

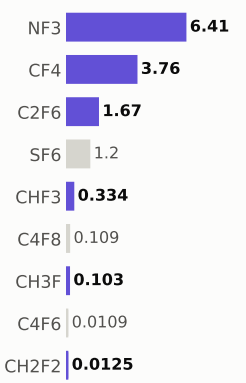

Step #6820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	633.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

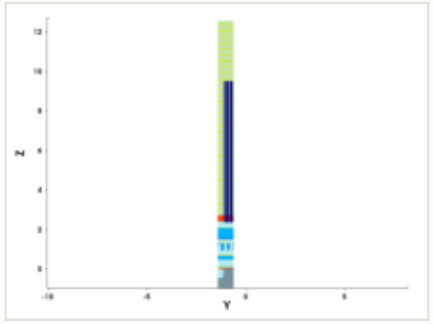

y cut at -1.035 µm

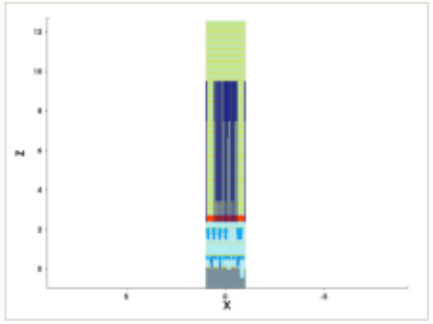

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

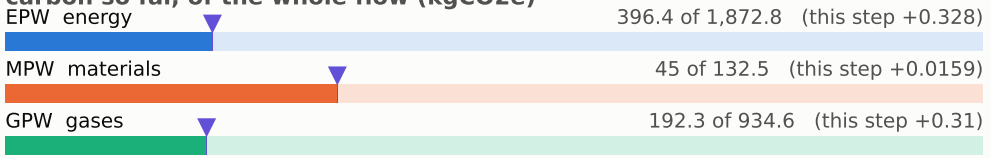

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

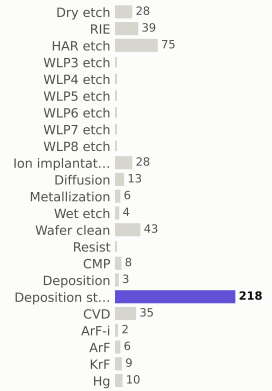

materials deposited (g)

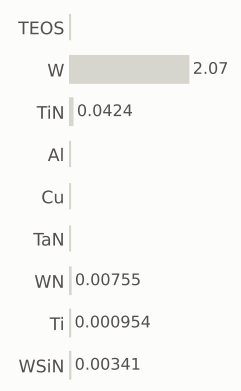

gases emitted (g)

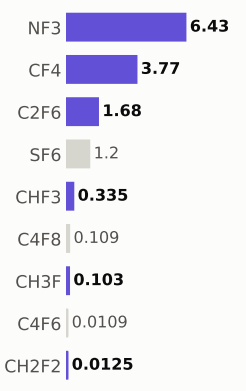

Step #6830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	634.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

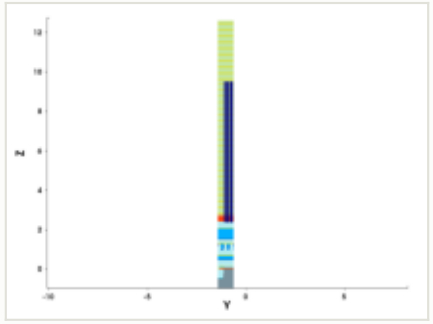

y cut at -1.035 µm

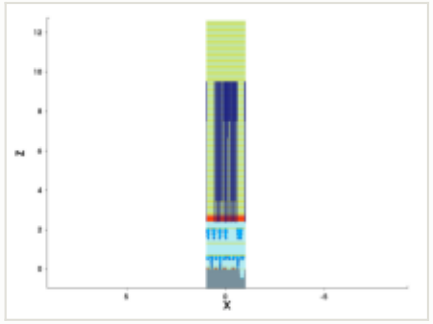

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

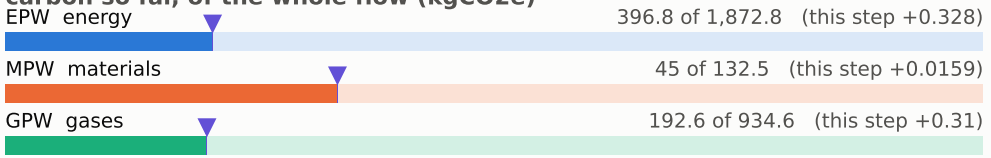

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

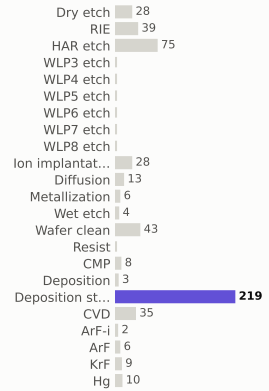

materials deposited (g)

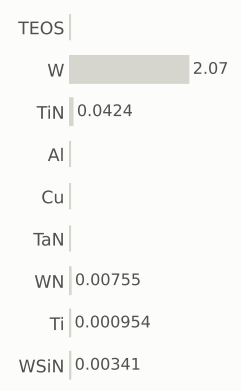

gases emitted (g)

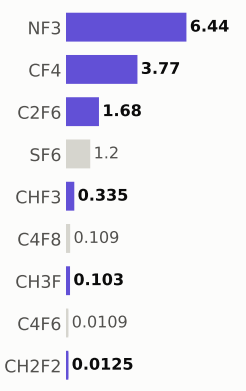

Step #6840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	635.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

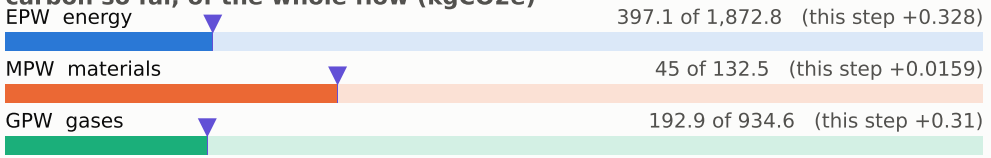

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

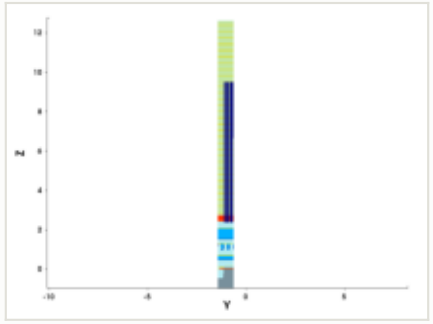

y cut at -1.035 µm

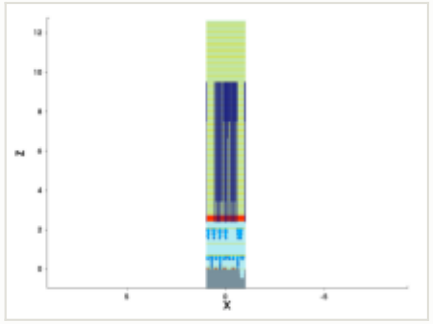

mask for this step

no mask for this step

steps by process area

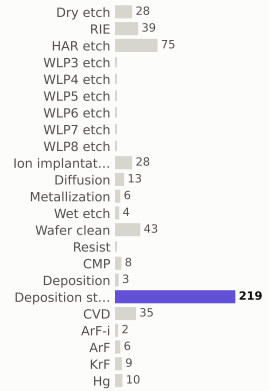

materials deposited (g)

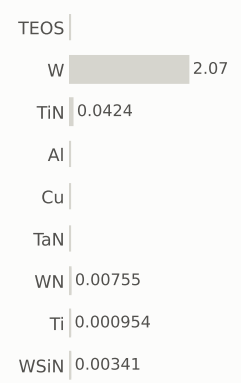

gases emitted (g)

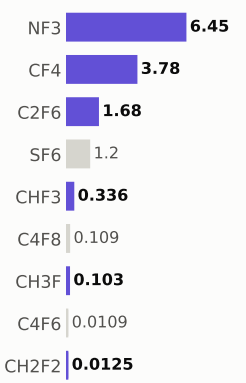

Step #6850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	635.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

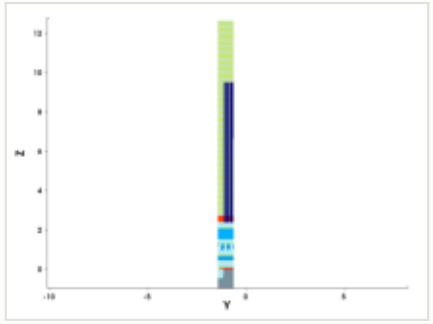

y cut at -1.035 µm

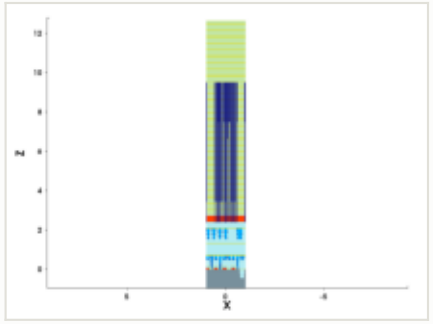

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

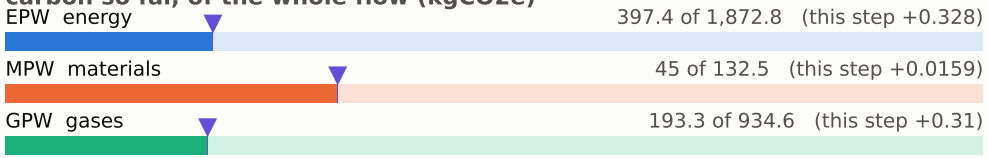

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

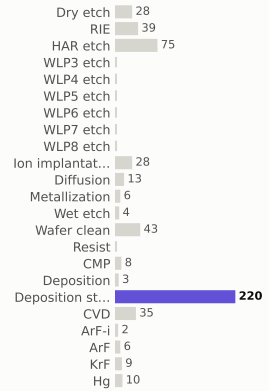

materials deposited (g)

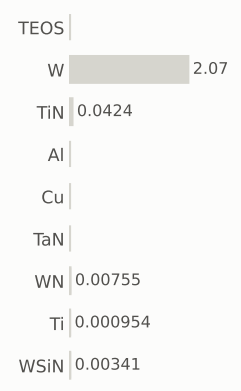

gases emitted (g)

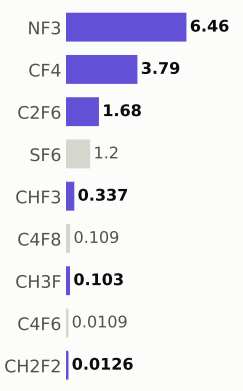

Step #6860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	636.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

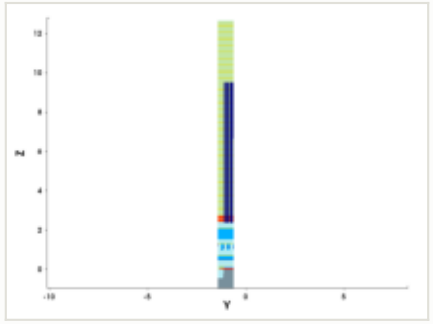

y cut at -1.035 µm

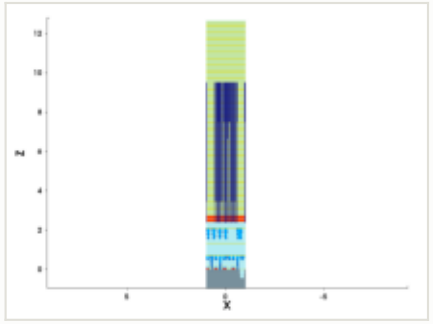

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

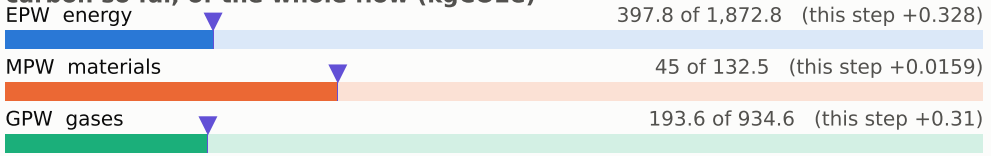

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

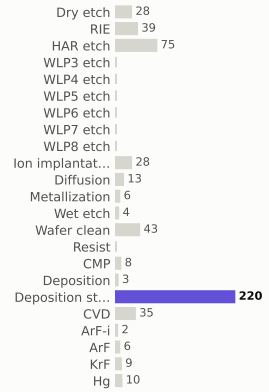

materials deposited (g)

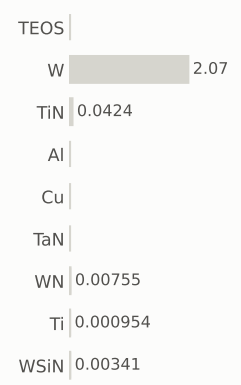

gases emitted (g)

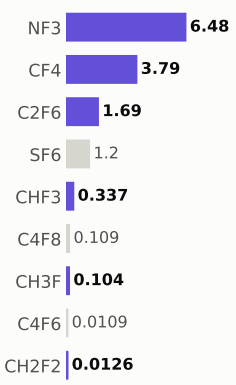

Step #6870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	637.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

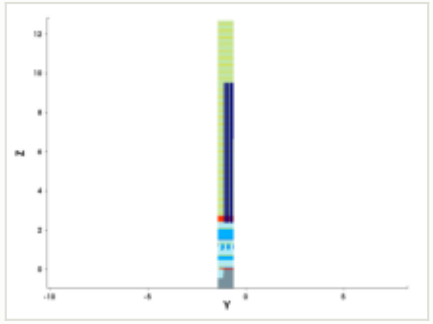

y cut at -1.035 µm

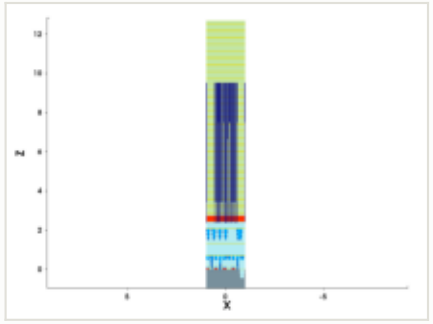

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

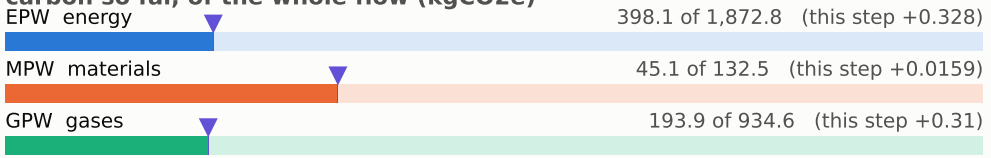

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

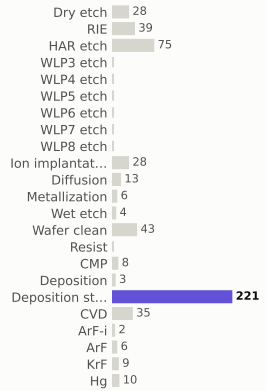

materials deposited (g)

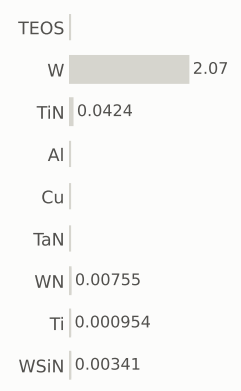

gases emitted (g)

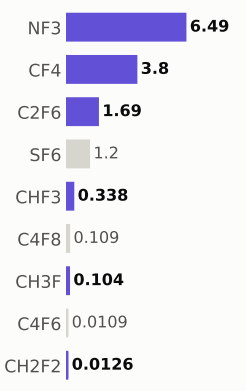

Step #6880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	637.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

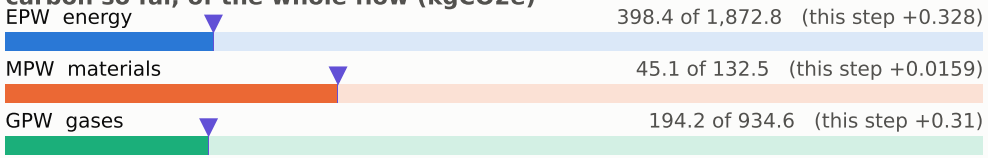

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

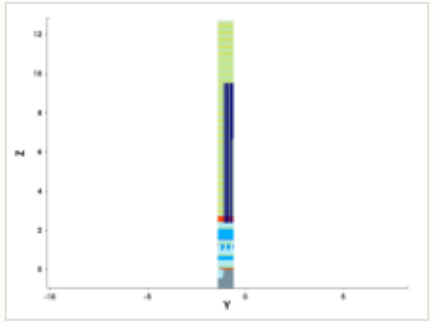

y cut at -1.035 µm

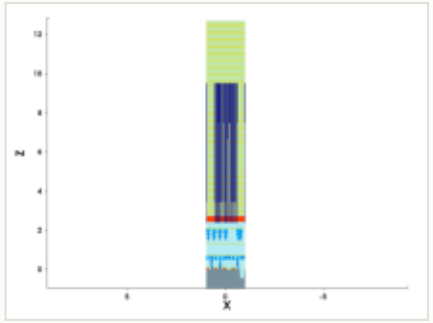

mask for this step

no mask for this step

steps by process area

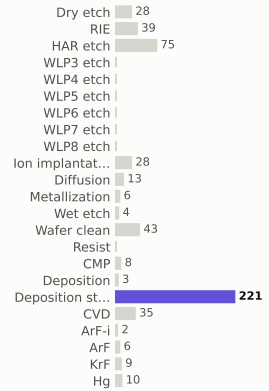

materials deposited (g)

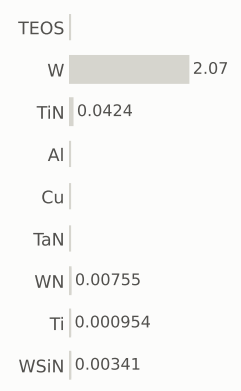

gases emitted (g)

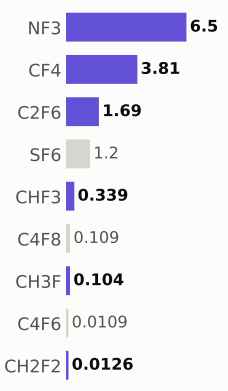

Step #6890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	638.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

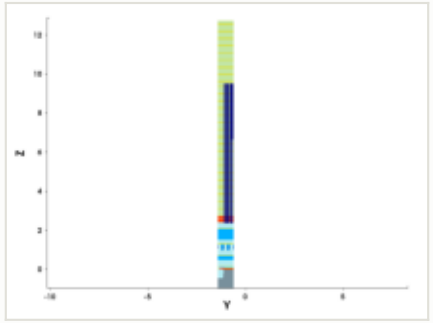

y cut at -1.035 µm

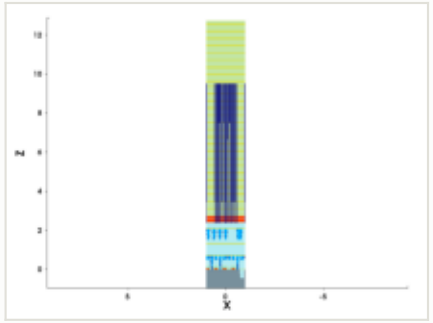

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

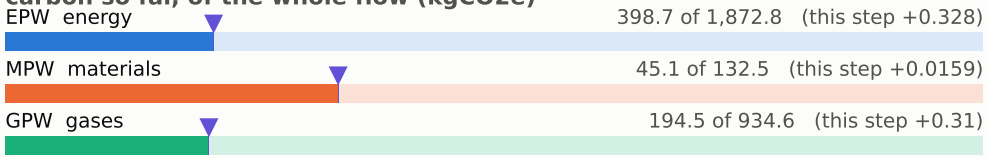

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

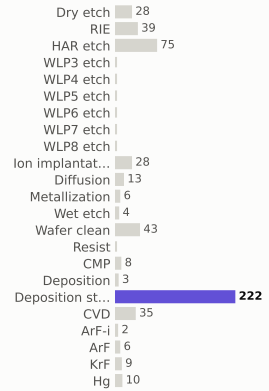

materials deposited (g)

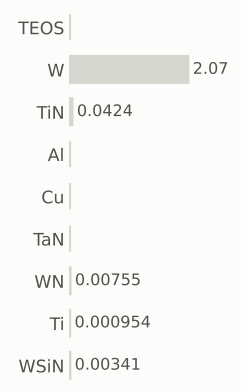

gases emitted (g)

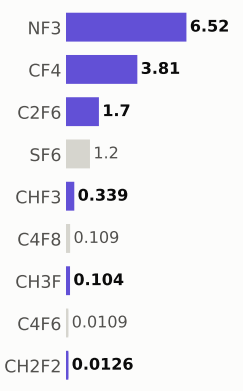

Step #6900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	639.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

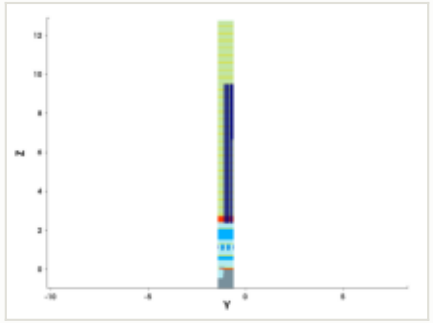

y cut at -1.035 µm

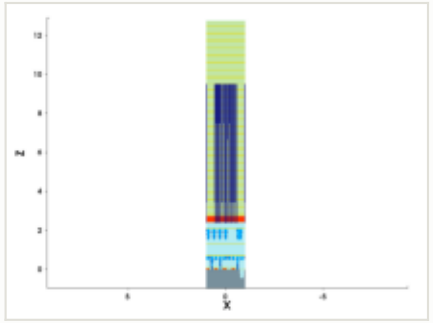

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

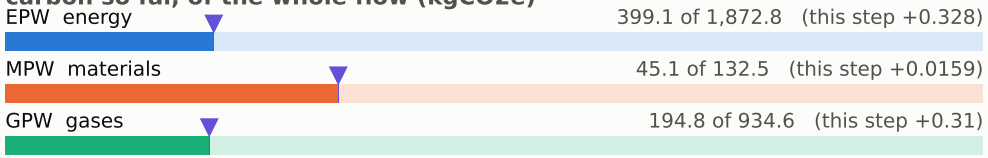

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

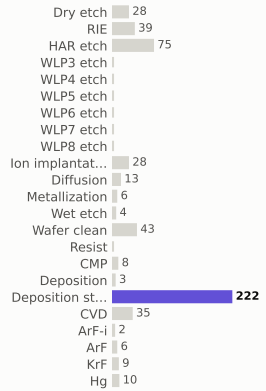

materials deposited (g)

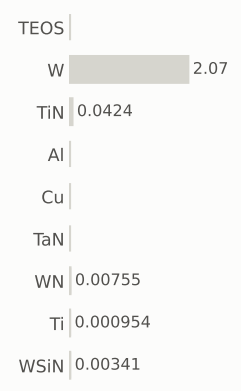

gases emitted (g)

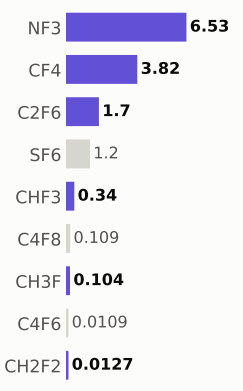

Step #6910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	639.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

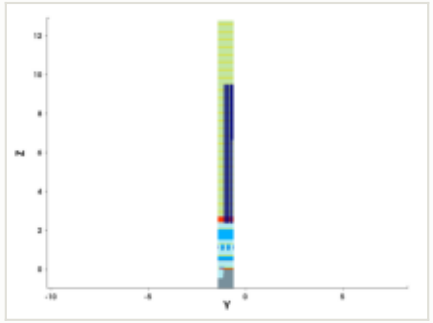

y cut at -1.035 µm

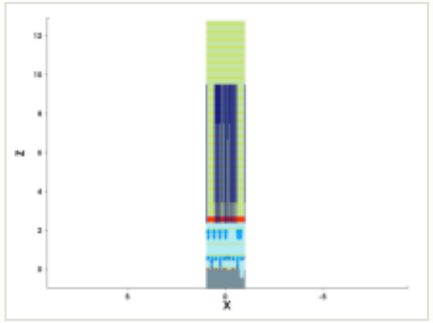

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

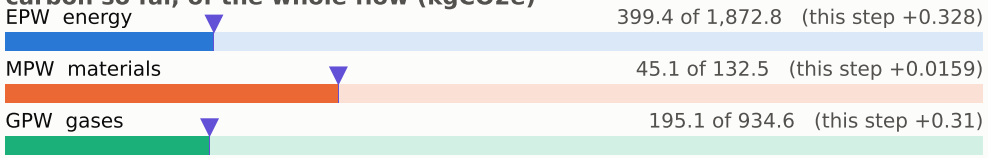

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

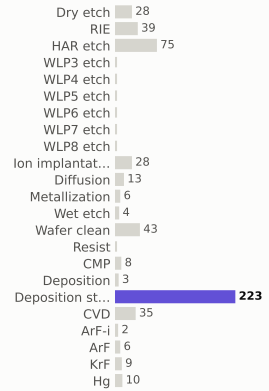

materials deposited (g)

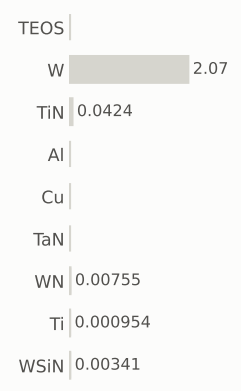

gases emitted (g)

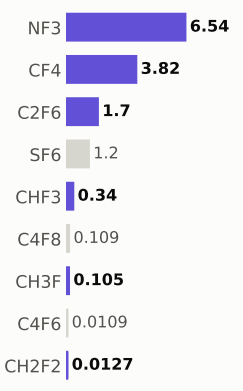

Step #6920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	640.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

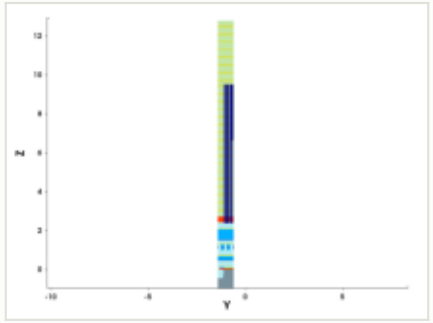

y cut at -1.035 µm

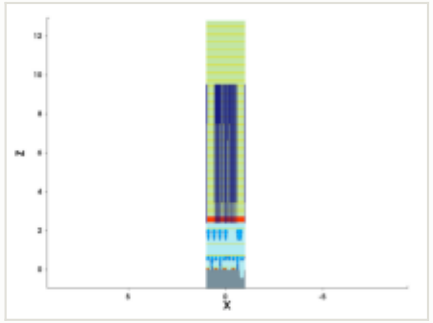

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

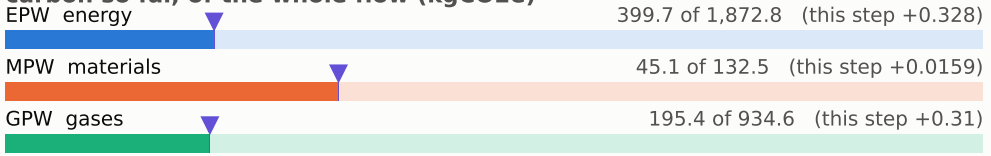

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

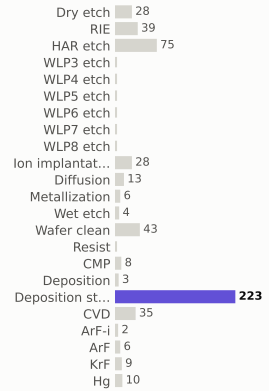

materials deposited (g)

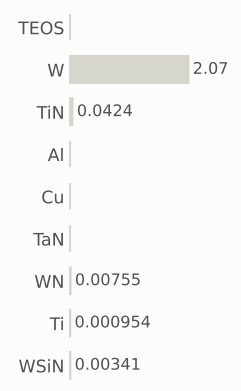

gases emitted (g)

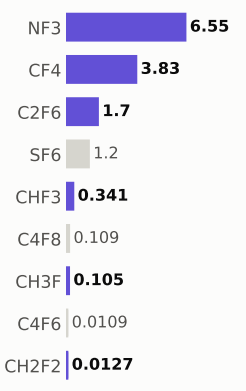

Step #6930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	640.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

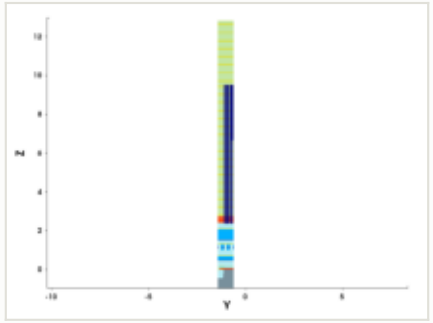

y cut at -1.035 µm

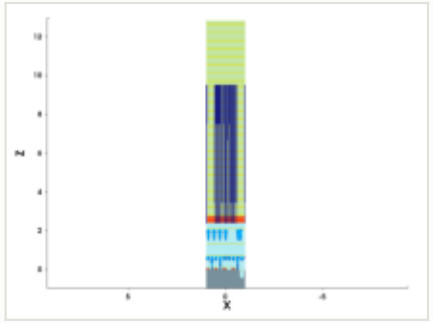

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

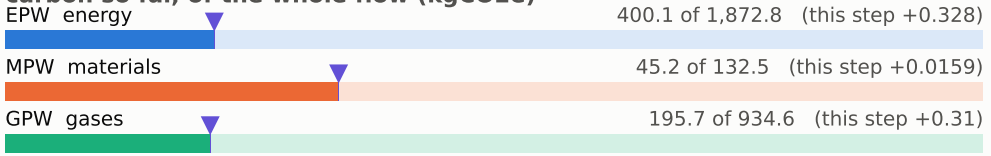

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

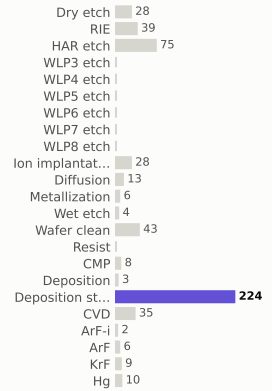

materials deposited (g)

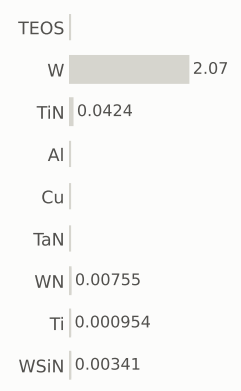

gases emitted (g)

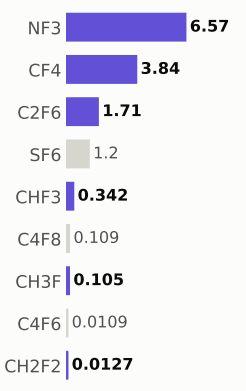

Step #6940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	641.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

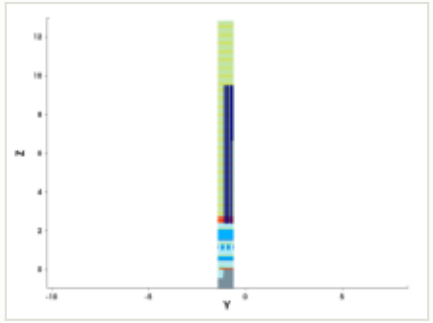

y cut at -1.035 µm

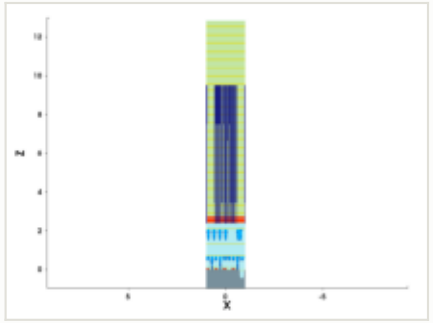

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

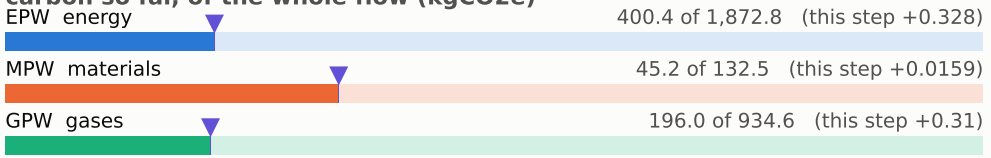

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

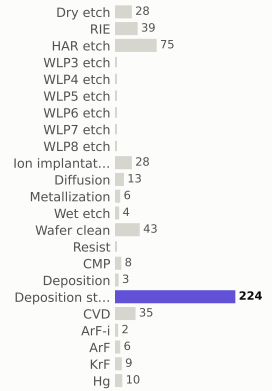

materials deposited (g)

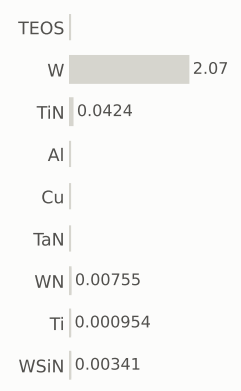

gases emitted (g)

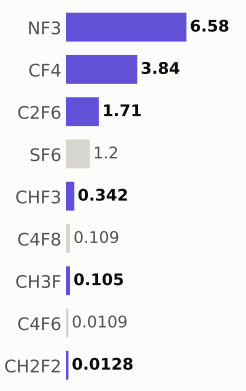

Step #6950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	642.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

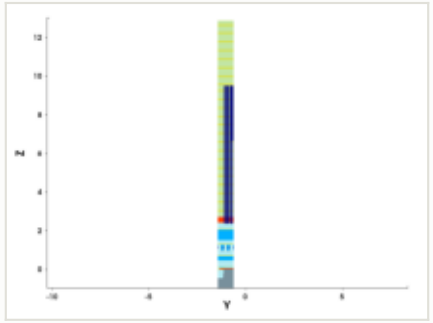

y cut at -1.035 µm

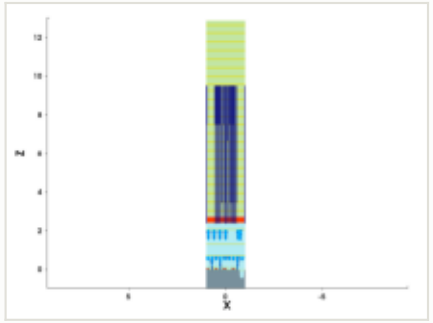

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

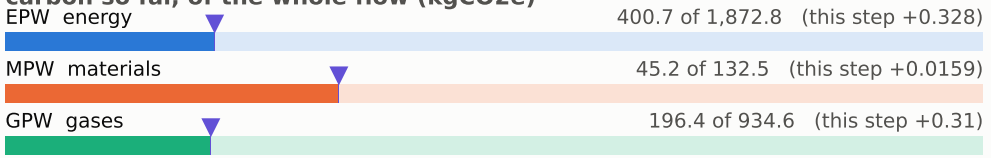

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

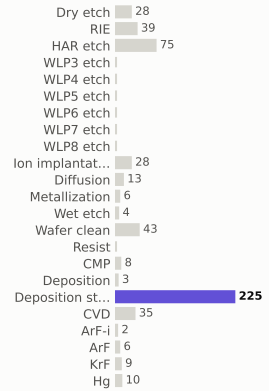

materials deposited (g)

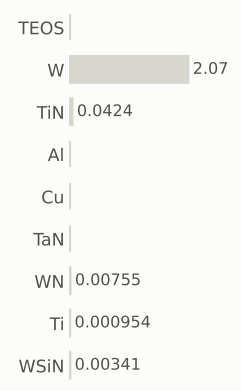

gases emitted (g)

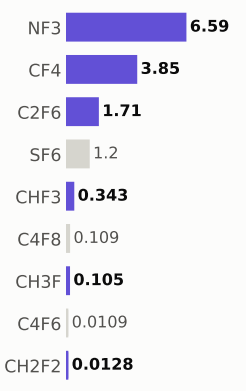

Step #6960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	642.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

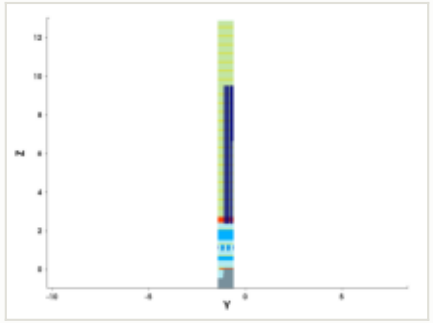

y cut at -1.035 µm

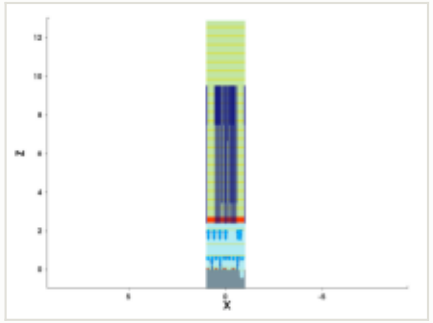

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

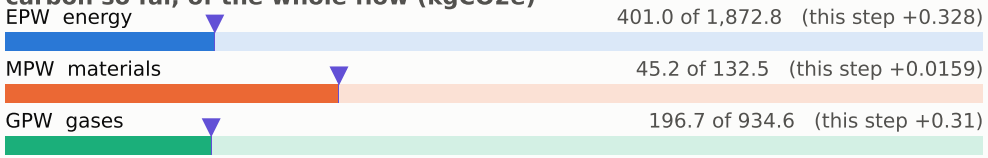

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

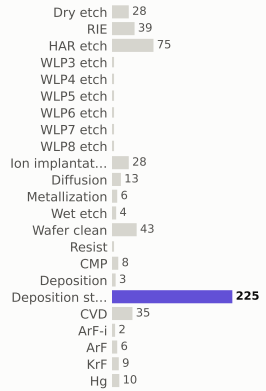

materials deposited (g)

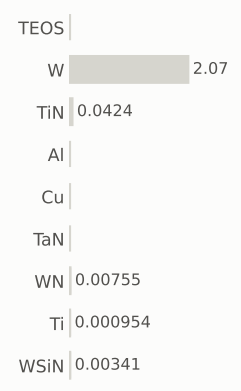

gases emitted (g)

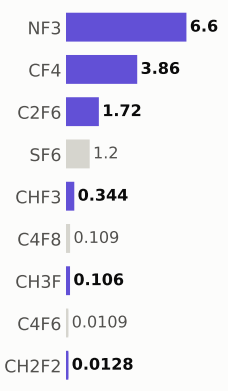

Step #6970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	643.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

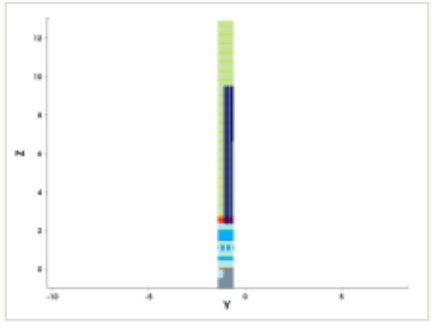

y cut at -1.035 µm

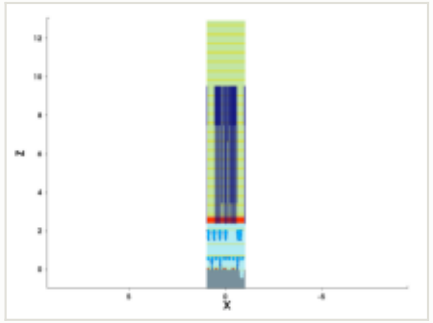

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

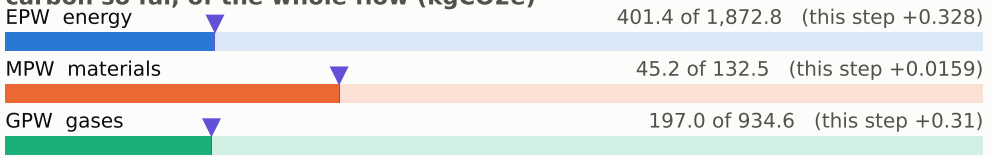

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

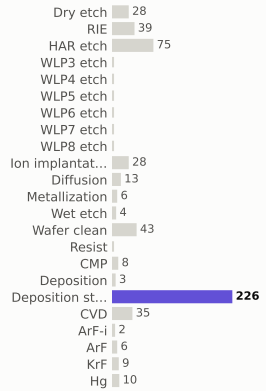

materials deposited (g)

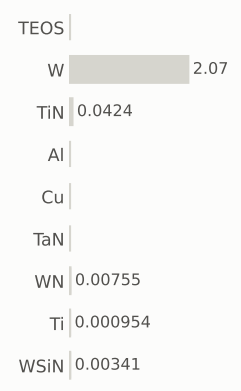

gases emitted (g)

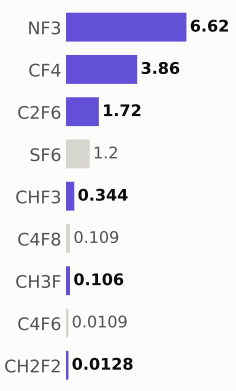

Step #6980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	644.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

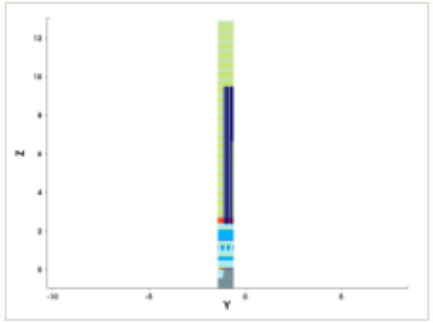

y cut at -1.035 µm

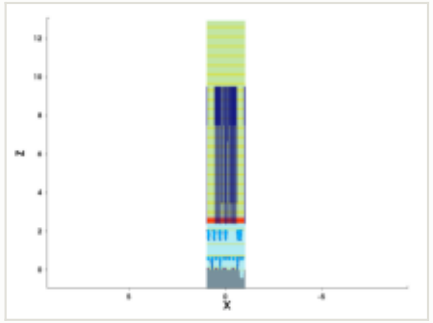

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

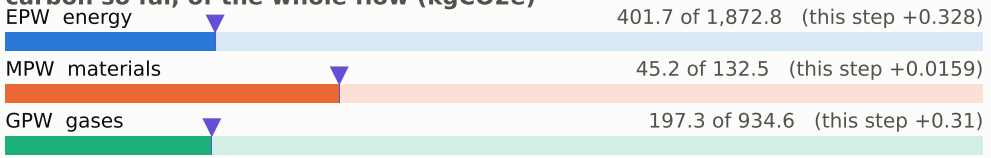

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

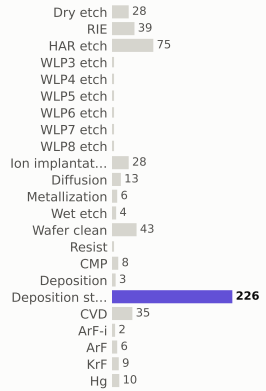

materials deposited (g)

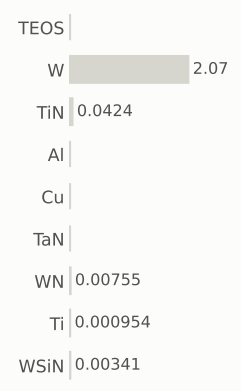

gases emitted (g)

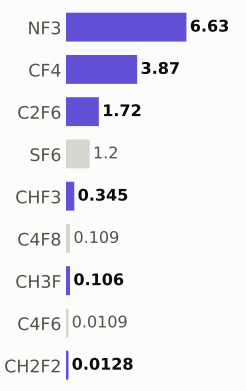

Step #6990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	644.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

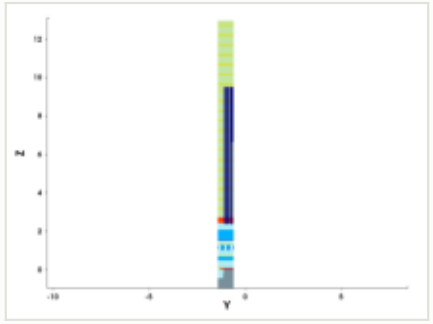

y cut at -1.035 µm

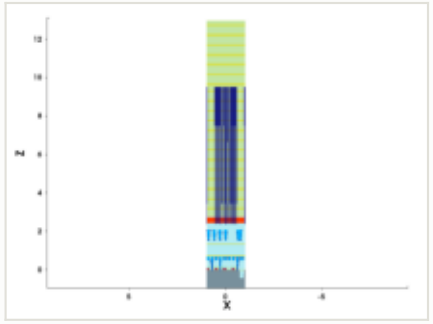

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

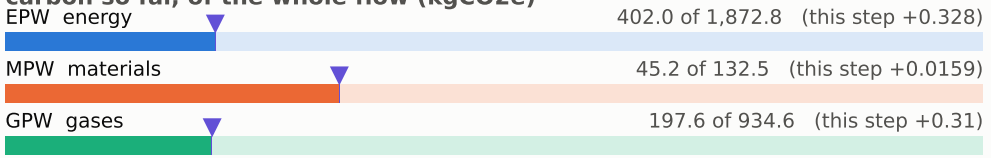

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

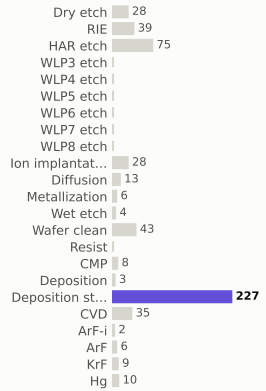

materials deposited (g)

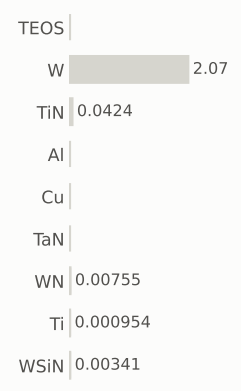

gases emitted (g)

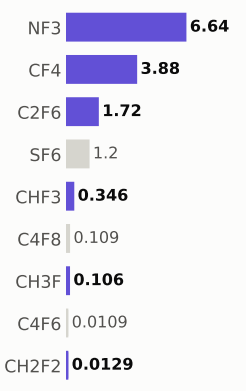

Step #7000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	645.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

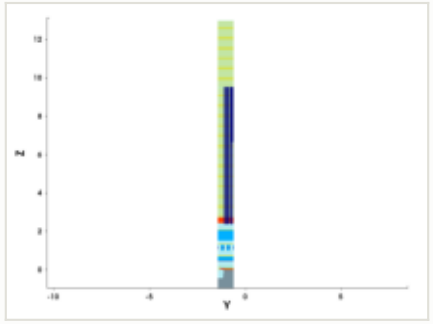

y cut at -1.035 µm

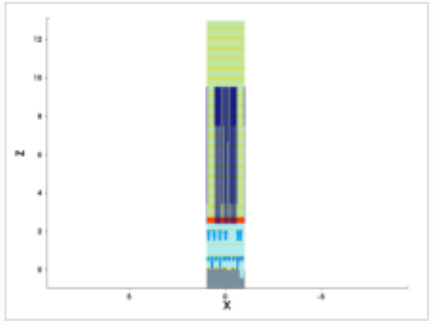

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

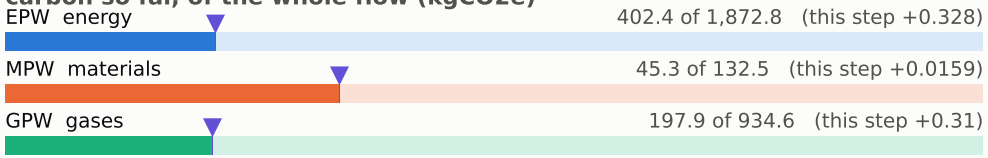

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

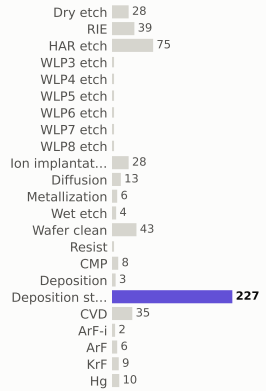

materials deposited (g)

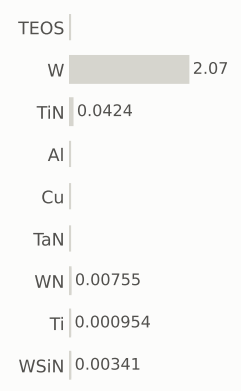

gases emitted (g)

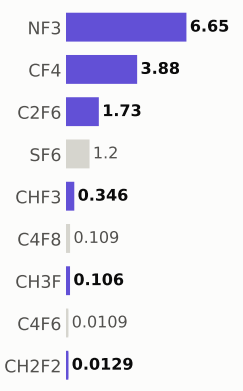

Step #7010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	646.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

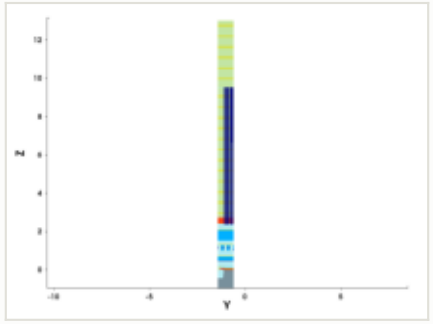

y cut at -1.035 µm

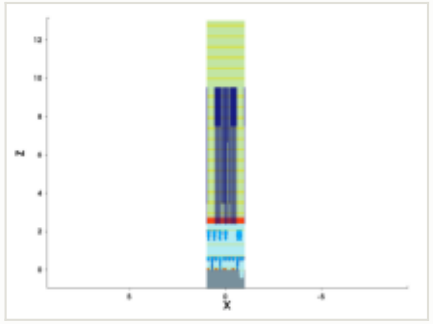

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 402.7 of 1,872.8 (this step +0.328)

MPW materials — 45.3 of 132.5 (this step +0.0159)

GPW gases — 198.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

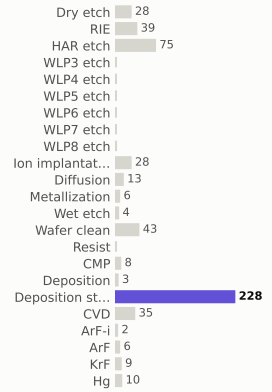

materials deposited (g)

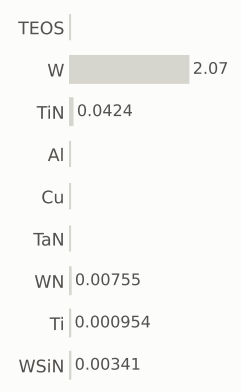

gases emitted (g)

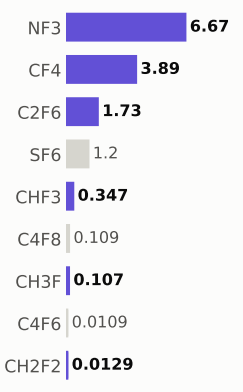

Step #7020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	646.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

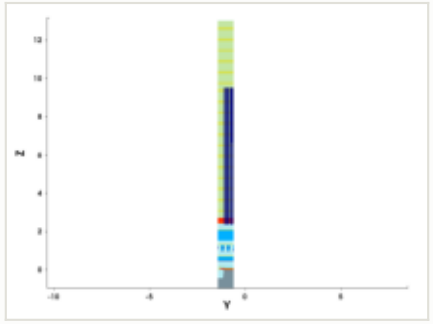

y cut at -1.035 µm

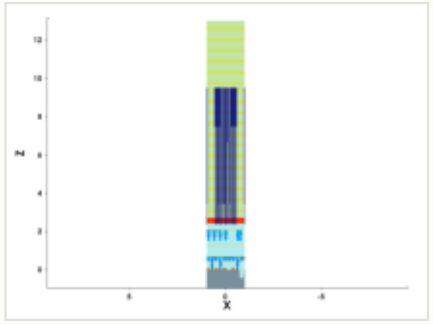

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

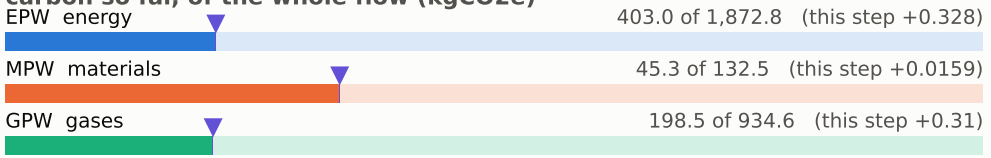

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

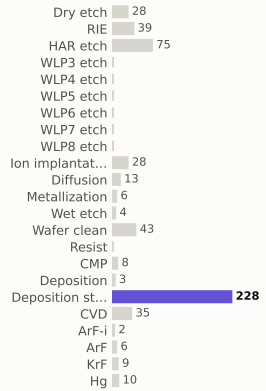

materials deposited (g)

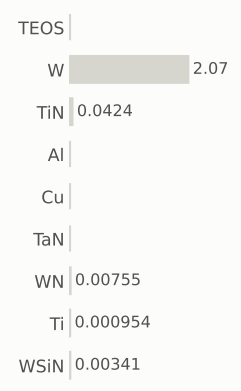

gases emitted (g)

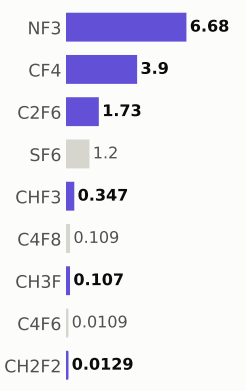

Step #7030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	647.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

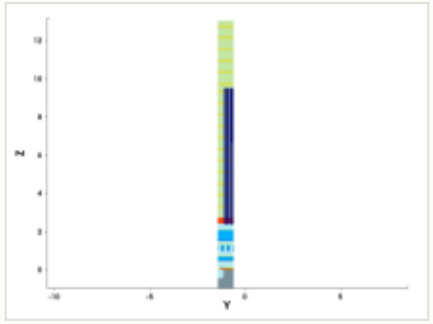

y cut at -1.035 µm

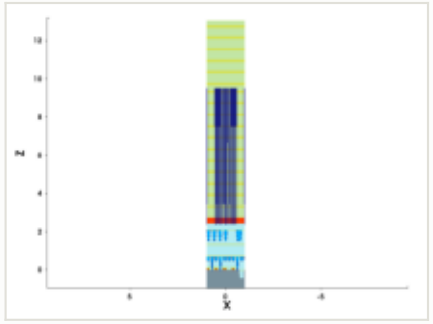

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 403.3 of 1,872.8 (this step +0.328)

MPW materials — 45.3 of 132.5 (this step +0.0159)

GPW gases — 198.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

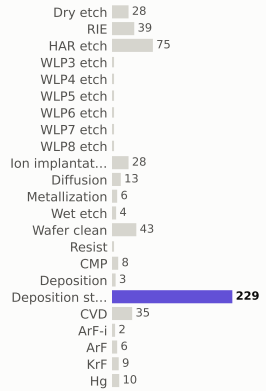

materials deposited (g)

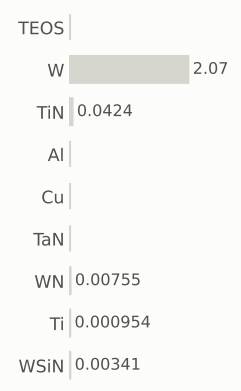

gases emitted (g)

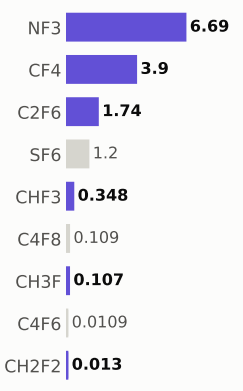

Step #7040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	648.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

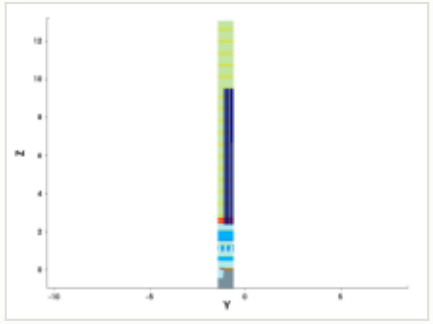

y cut at -1.035 µm

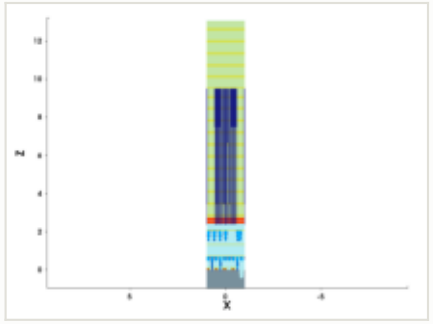

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 403.7 of 1,872.8 (this step +0.328)

MPW materials — 45.3 of 132.5 (this step +0.0159)

GPW gases — 199.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

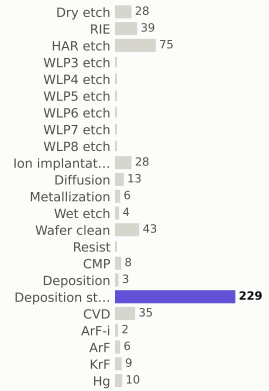

materials deposited (g)

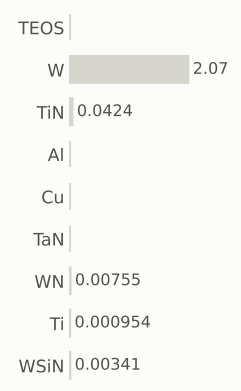

gases emitted (g)

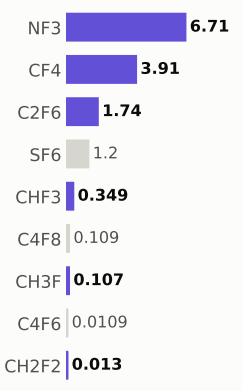

Step #7050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	648.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

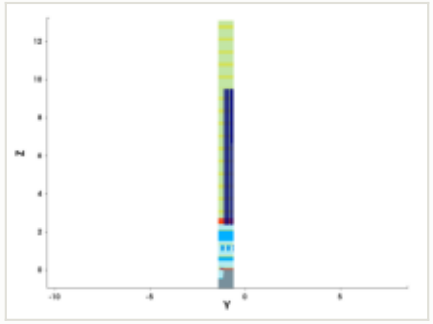

y cut at -1.035 µm

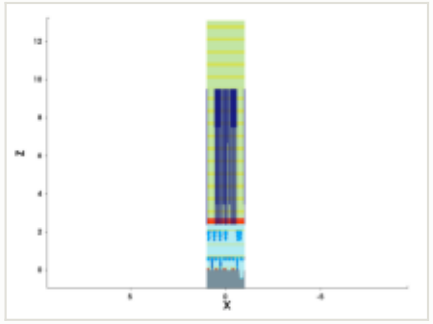

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

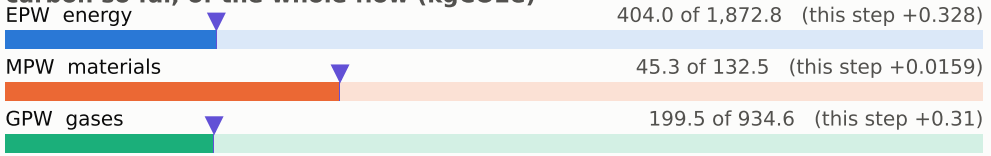

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

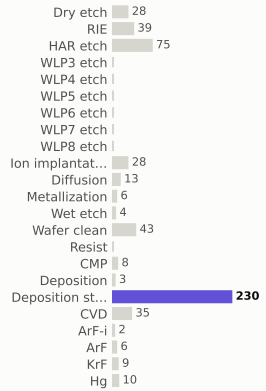

materials deposited (g)

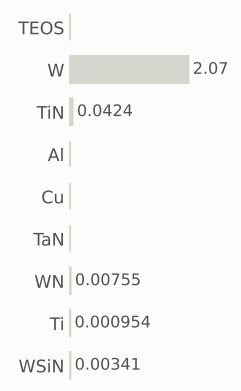

gases emitted (g)

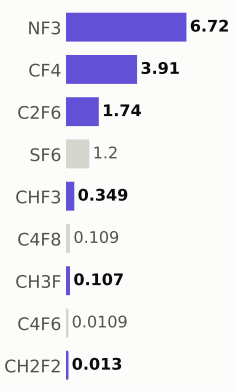

Step #7060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	649.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

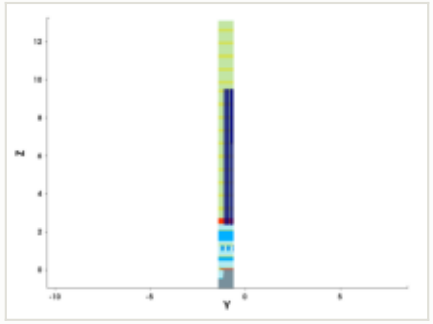

y cut at -1.035 µm

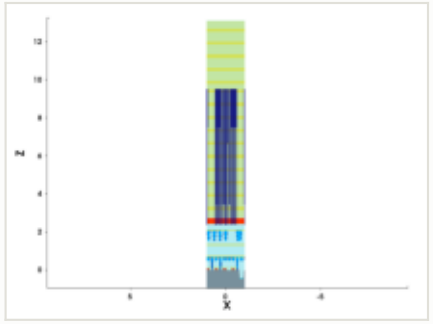

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

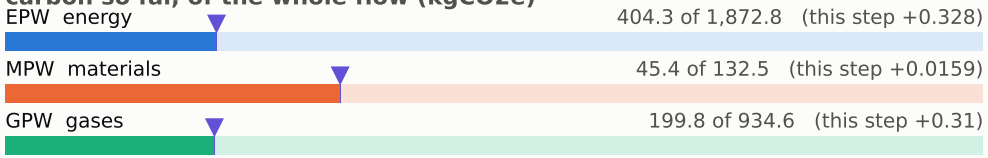

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

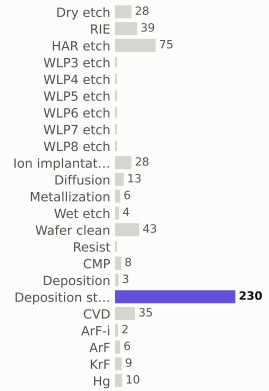

materials deposited (g)

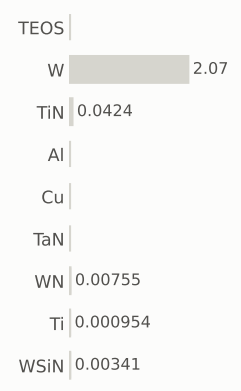

gases emitted (g)

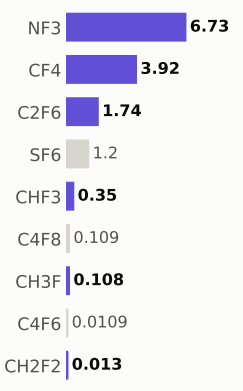

Step #7070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	650.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

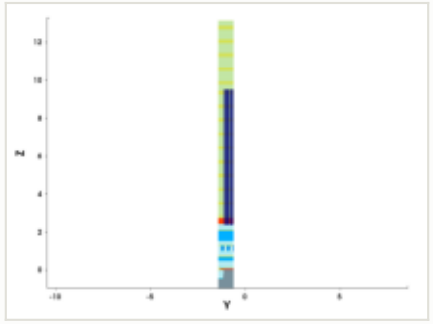

y cut at -1.035 µm

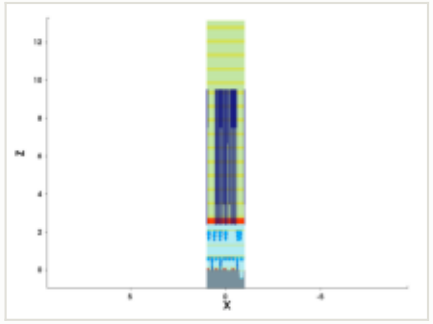

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

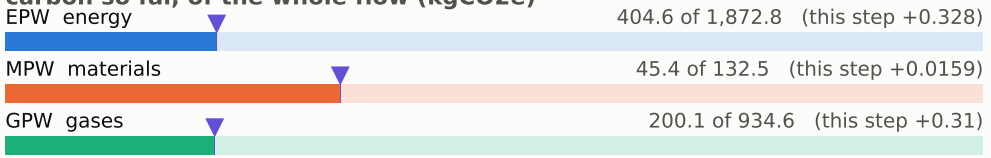

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

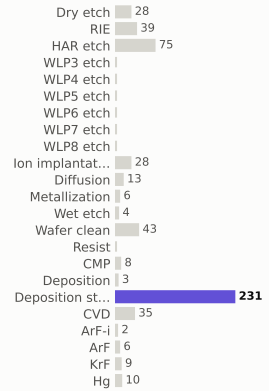

materials deposited (g)

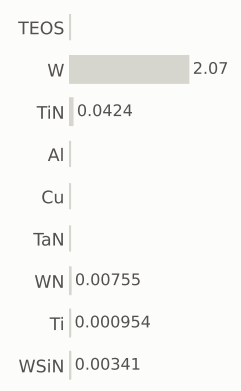

gases emitted (g)

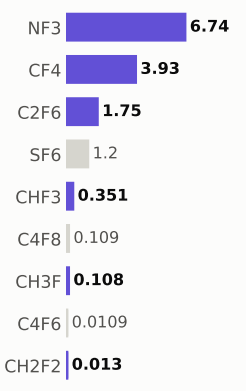

Step #7080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	650.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

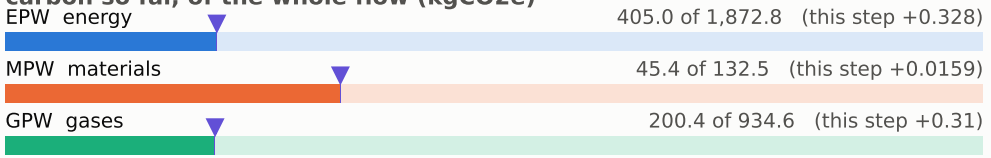

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

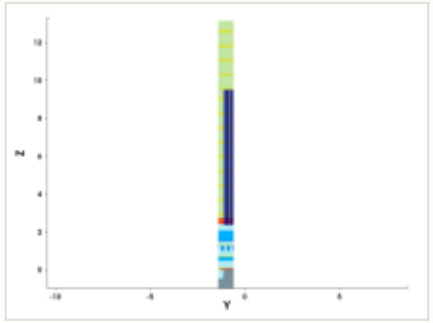

y cut at -1.035 µm

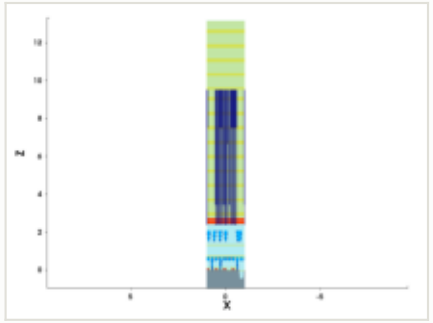

mask for this step

no mask for this step

steps by process area

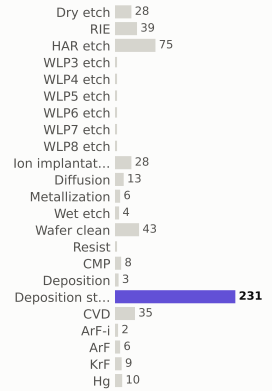

materials deposited (g)

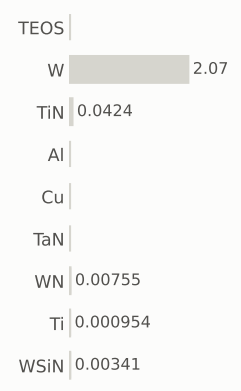

gases emitted (g)

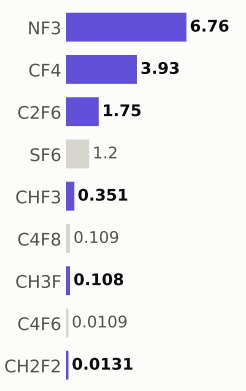

Step #7090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	651.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

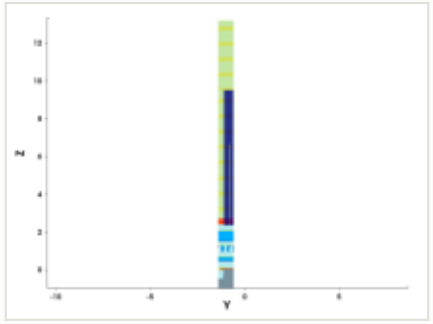

y cut at -1.035 µm

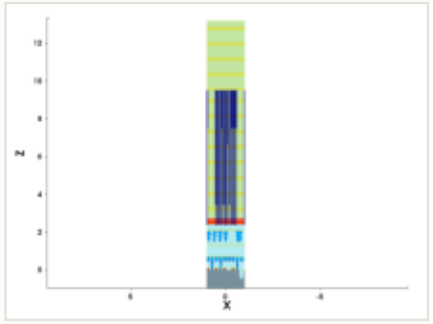

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

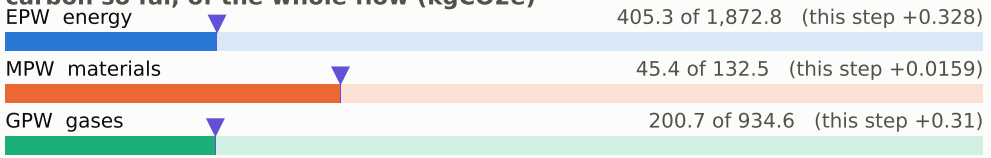

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

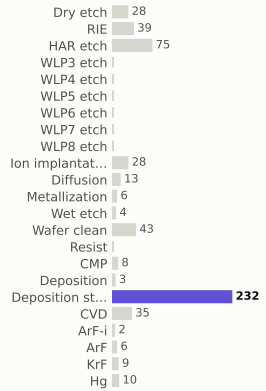

materials deposited (g)

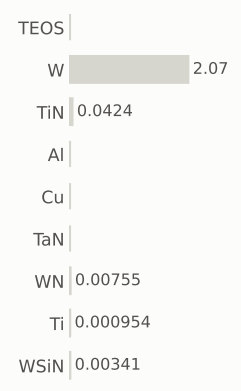

gases emitted (g)

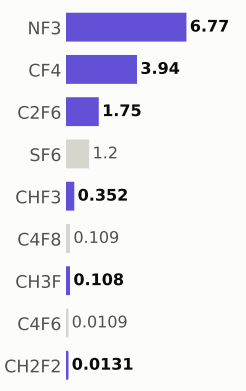

Step #7100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	652.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

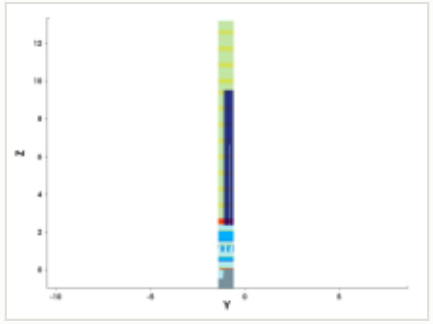

y cut at -1.035 µm

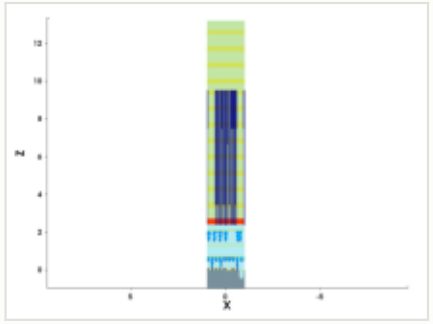

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

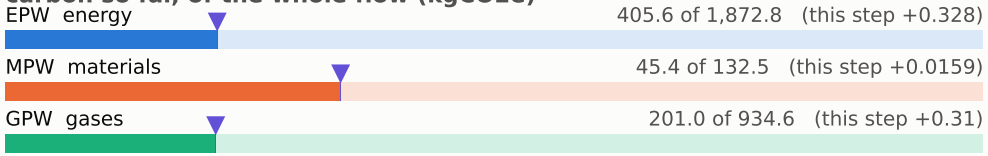

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

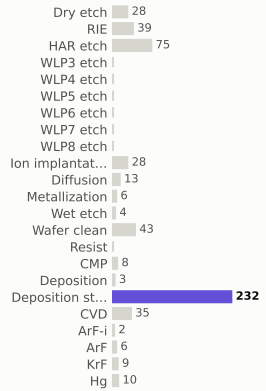

materials deposited (g)

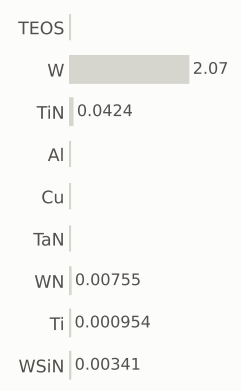

gases emitted (g)

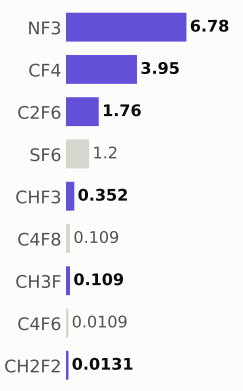

Step #7110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	652.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 406.0 of 1,872.8 (this step +0.328)

MPW materials — 45.4 of 132.5 (this step +0.0159)

GPW gases — 201.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

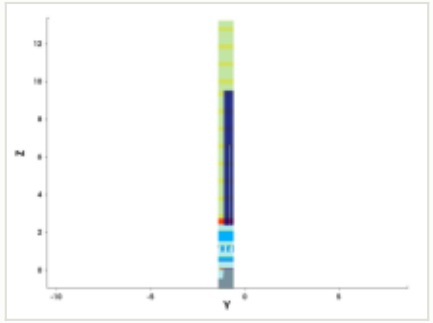

y cut at -1.035 µm

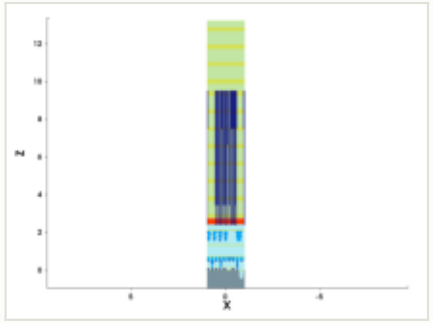

mask for this step

no mask for this step

steps by process area

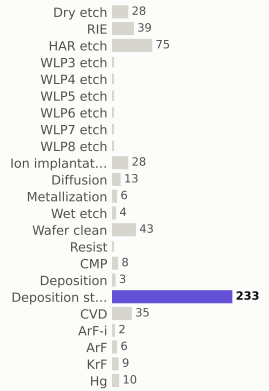

materials deposited (g)

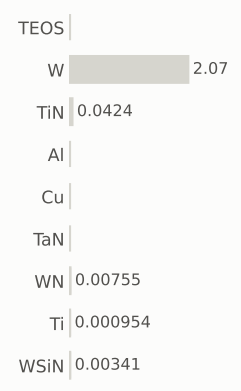

gases emitted (g)

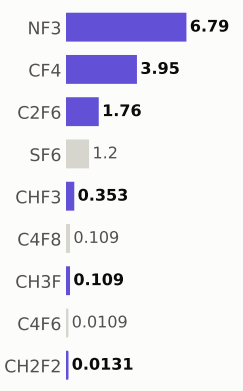

Step #7120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	653.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

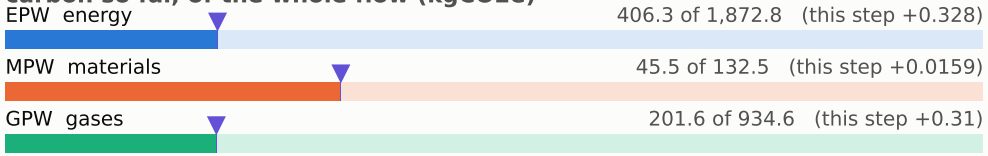

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

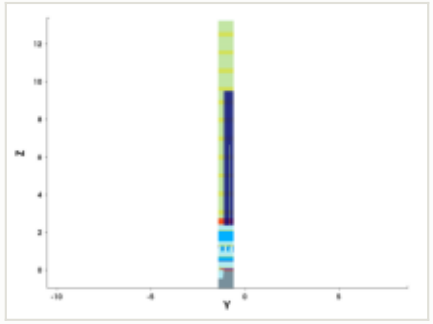

y cut at -1.035 µm

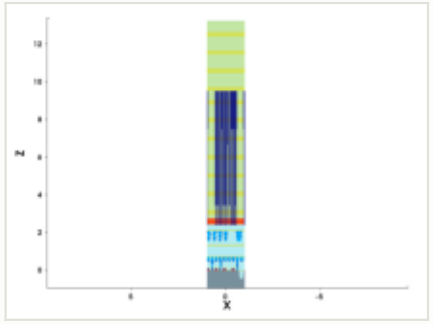

mask for this step

no mask for this step

steps by process area

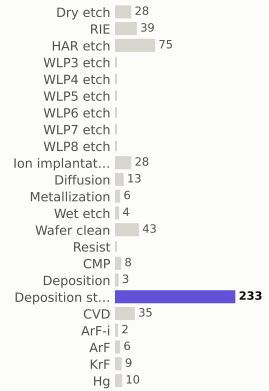

materials deposited (g)

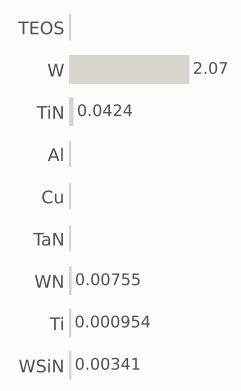

gases emitted (g)

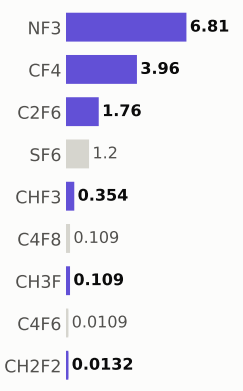

Step #7130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	654.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

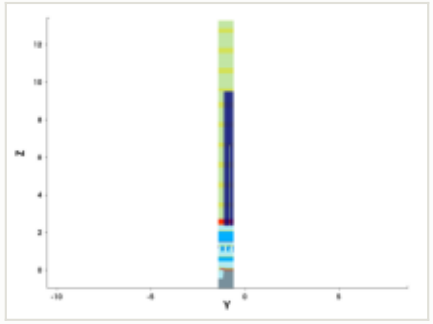

y cut at -1.035 µm

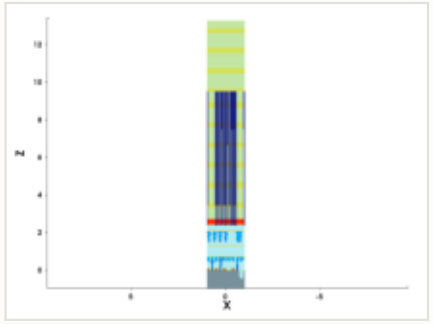

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

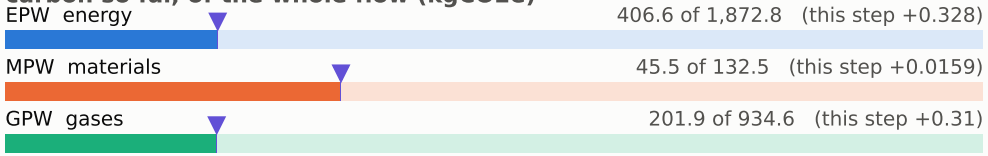

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

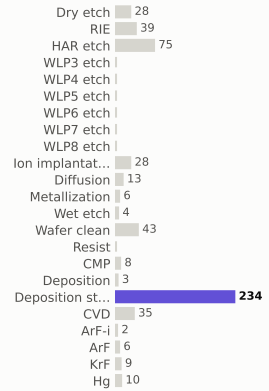

materials deposited (g)

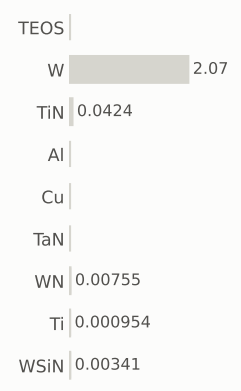

gases emitted (g)

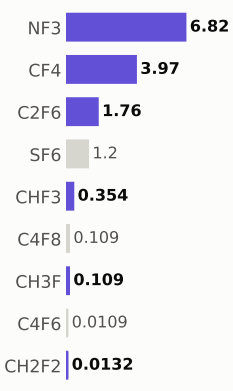

Step #7140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	654.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

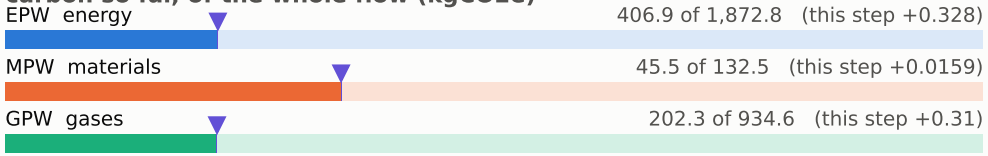

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

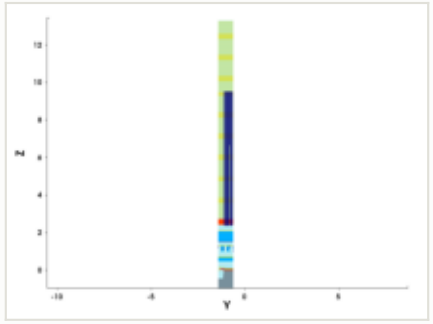

y cut at -1.035 µm

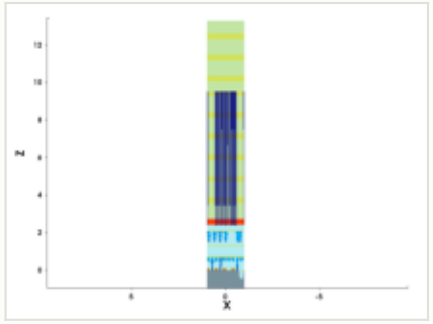

mask for this step

no mask for this step

steps by process area

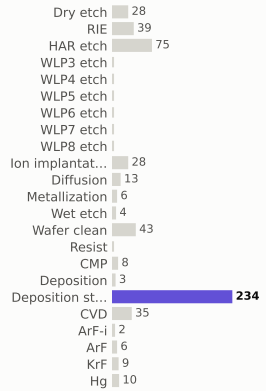

materials deposited (g)

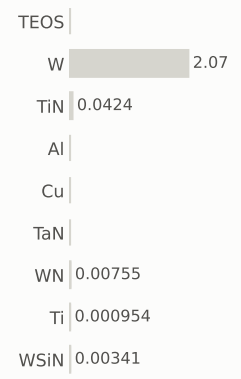

gases emitted (g)

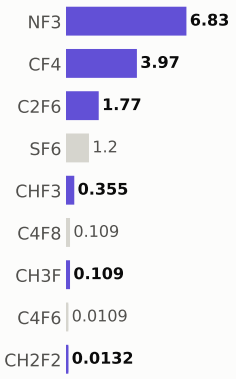

Step #7150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	655.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

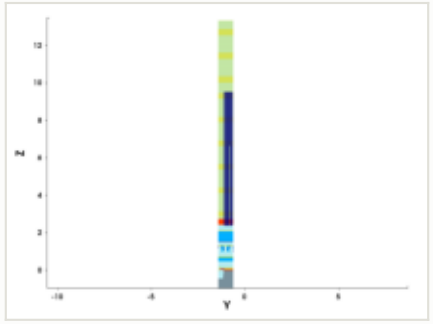

y cut at -1.035 µm

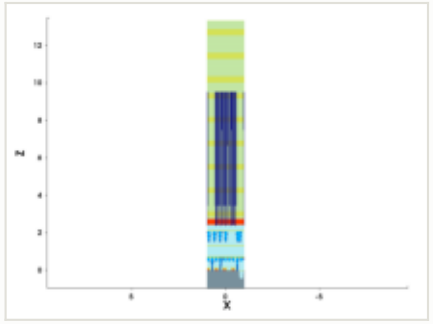

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

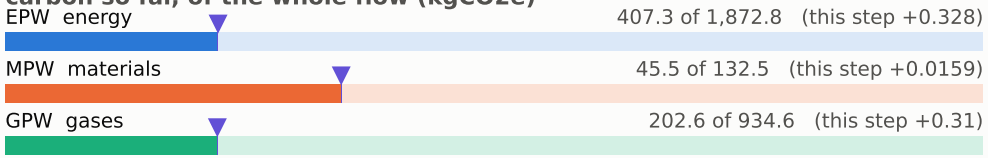

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

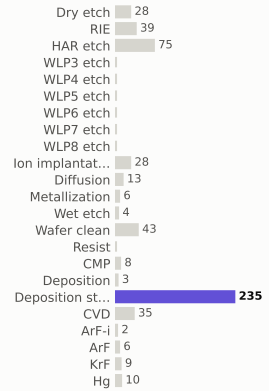

materials deposited (g)

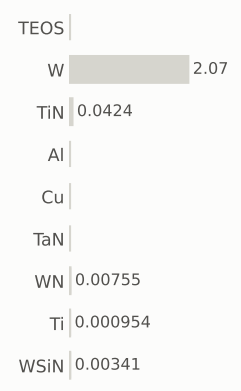

gases emitted (g)

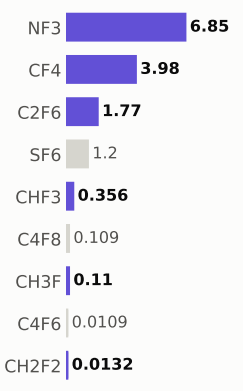

Step #7160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	656.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

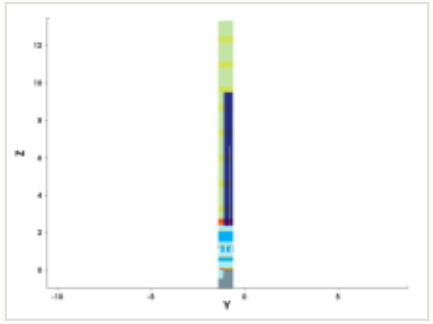

y cut at -1.035 µm

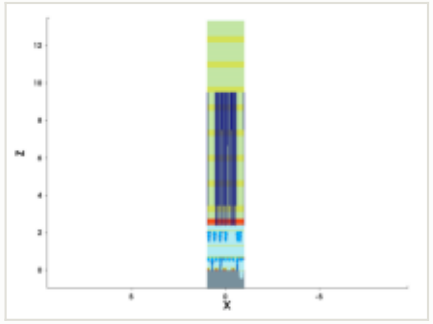

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

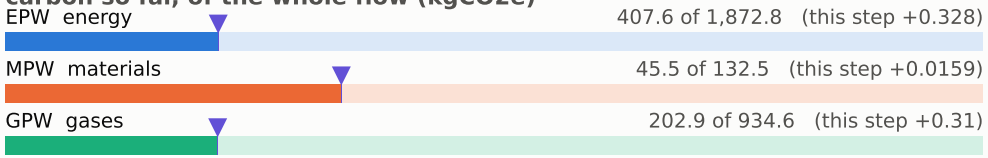

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

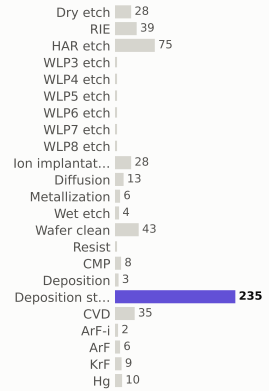

materials deposited (g)

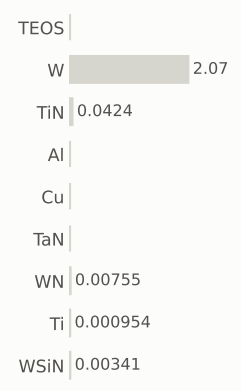

gases emitted (g)

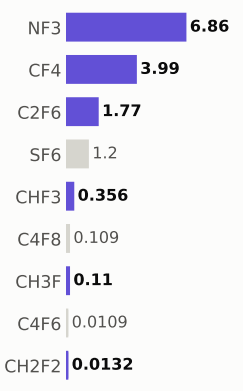

Step #7170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	656.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

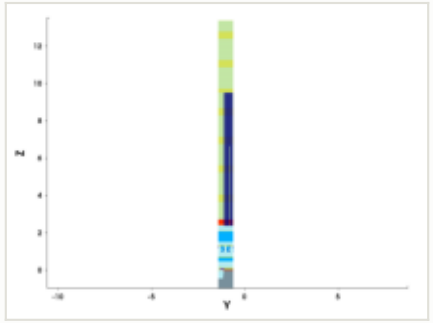

y cut at -1.035 µm

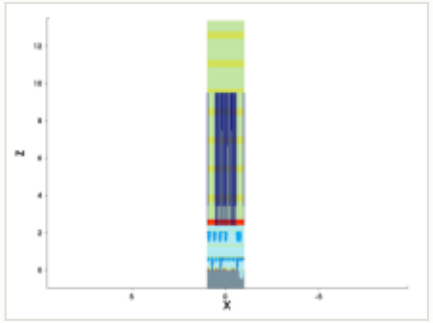

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 407.9 of 1,872.8 (this step +0.328)

MPW materials — 45.5 of 132.5 (this step +0.0159)

GPW gases — 203.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

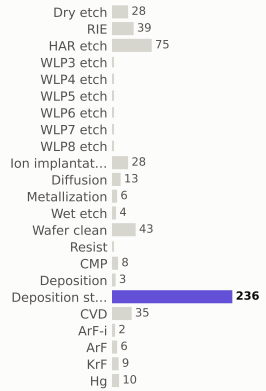

materials deposited (g)

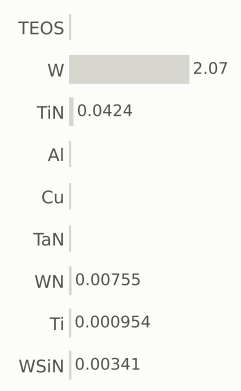

gases emitted (g)

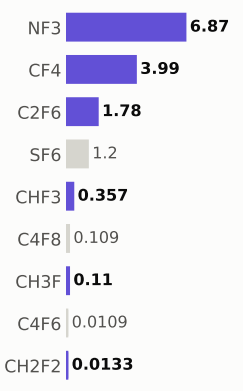

Step #7180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	657.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

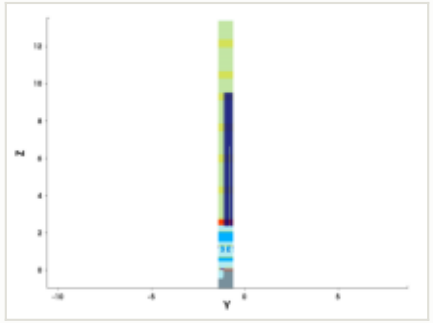

y cut at -1.035 µm

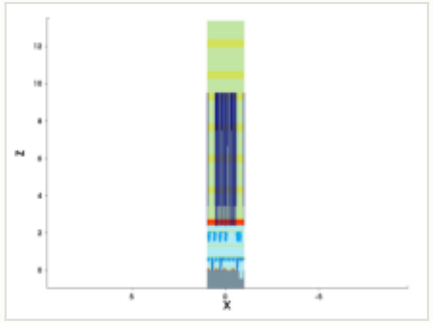

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

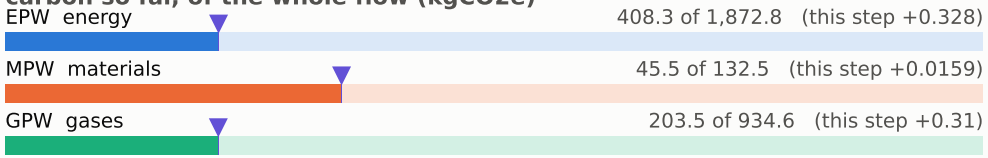

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

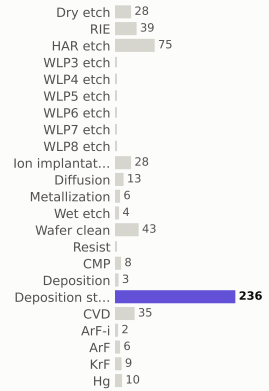

materials deposited (g)

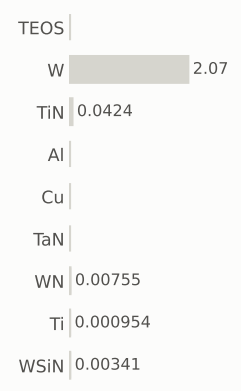

gases emitted (g)

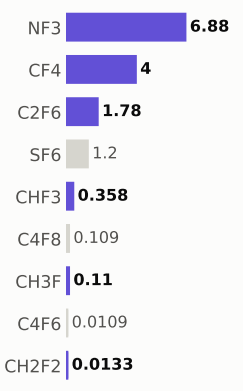

Step #7190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	658.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

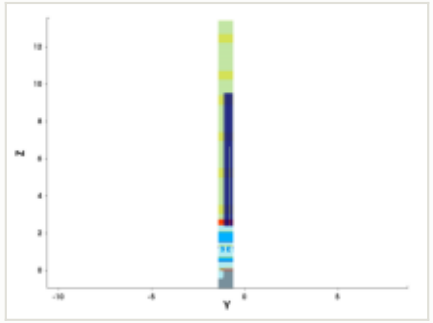

y cut at -1.035 µm

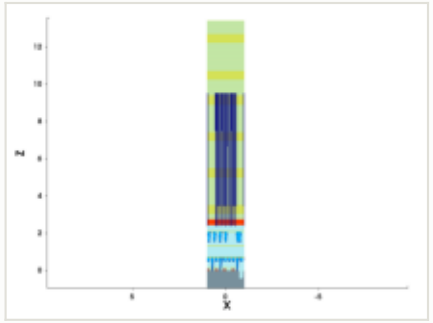

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

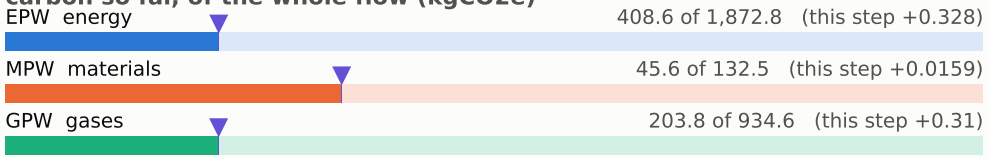

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

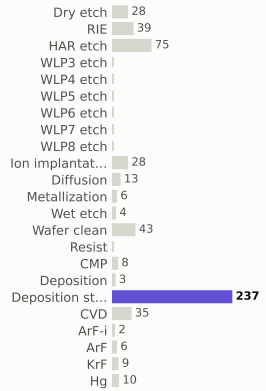

materials deposited (g)

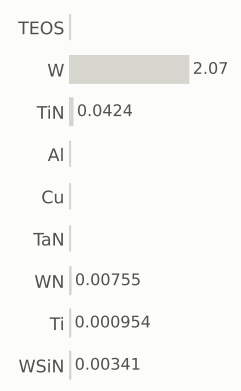

gases emitted (g)

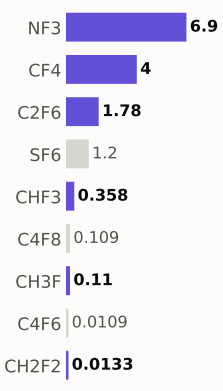

Step #7200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	658.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

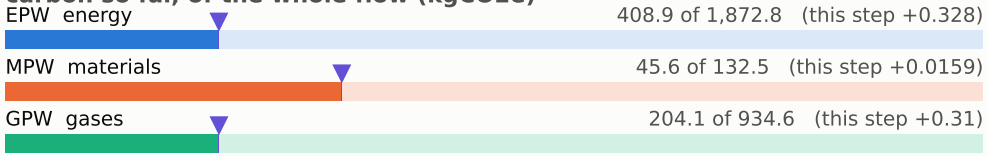

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

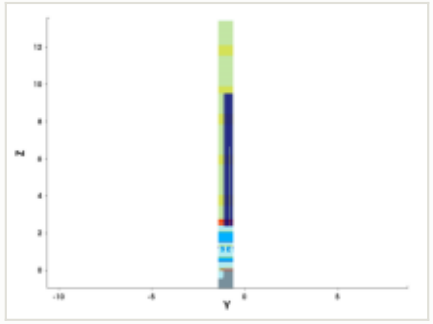

y cut at -1.035 µm

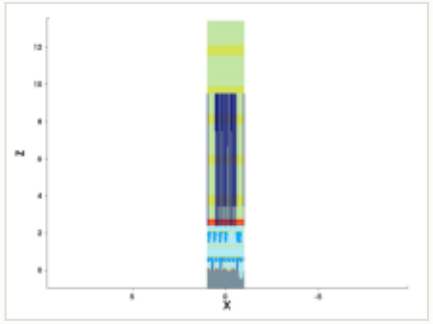

mask for this step

no mask for this step

steps by process area

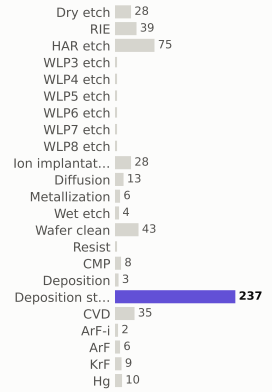

materials deposited (g)

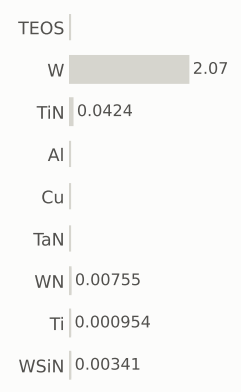

gases emitted (g)

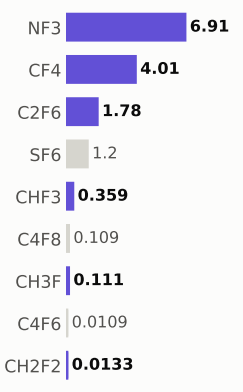

Step #7210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	659.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

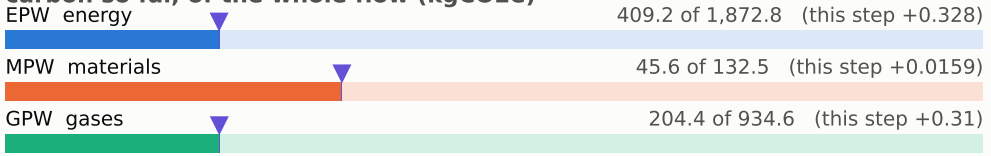

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

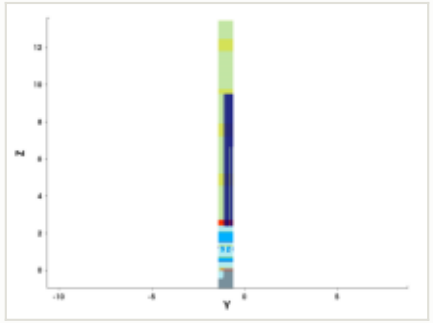

y cut at -1.035 µm

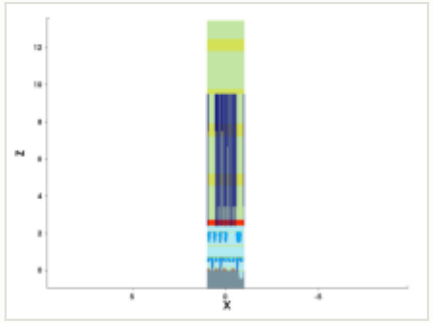

mask for this step

no mask for this step

steps by process area

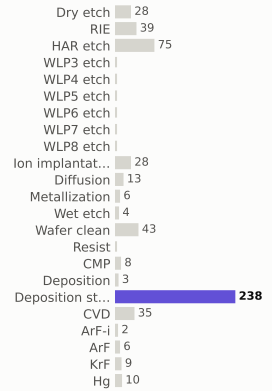

materials deposited (g)

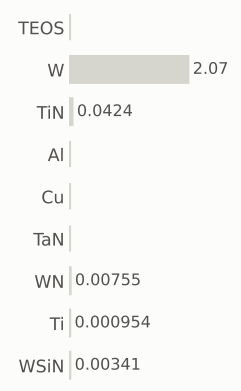

gases emitted (g)

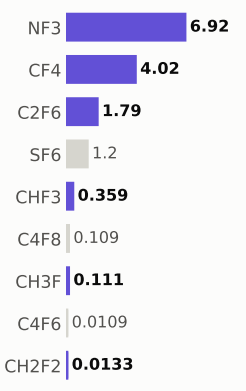

Step #7220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	659.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

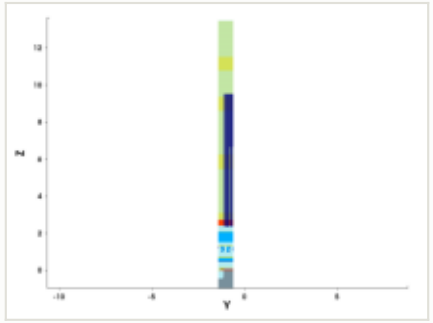

y cut at -1.035 µm

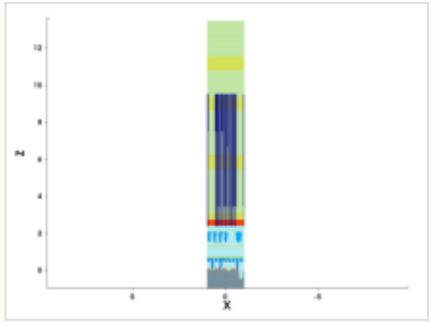

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

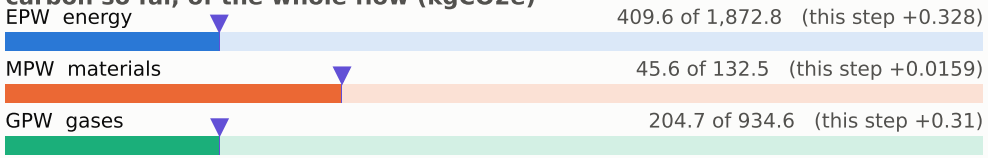

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

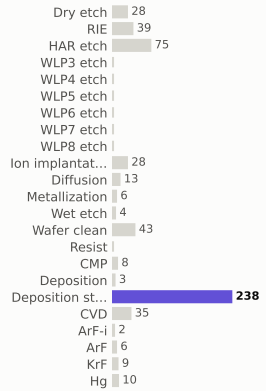

materials deposited (g)

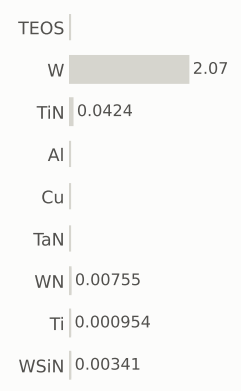

gases emitted (g)

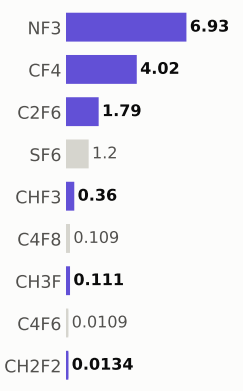

Step #7230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	660.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

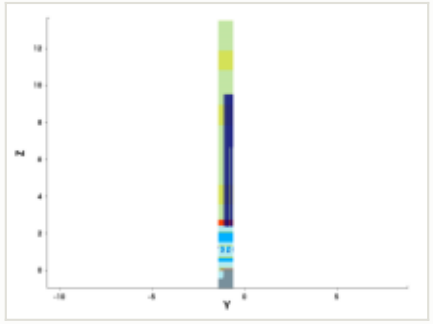

y cut at -1.035 µm

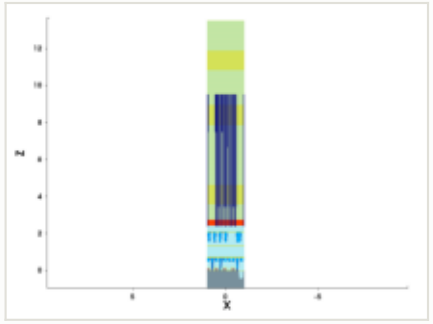

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

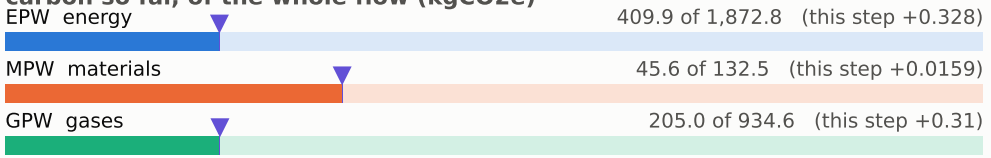

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

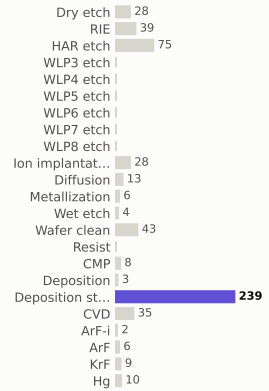

materials deposited (g)

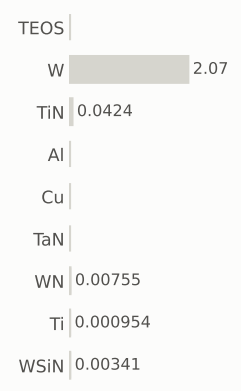

gases emitted (g)

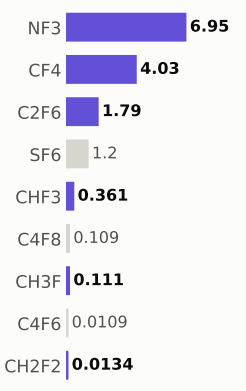

Step #7240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	661.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

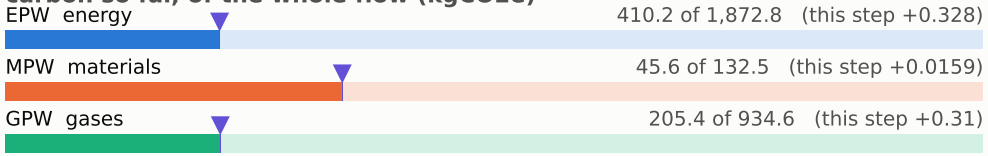

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

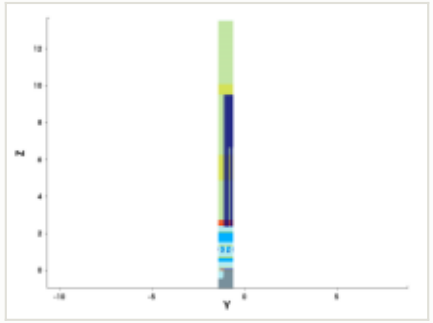

y cut at -1.035 µm

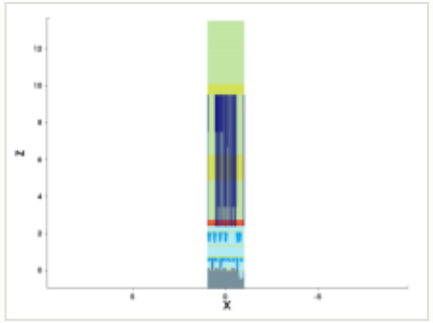

mask for this step

no mask for this step

steps by process area

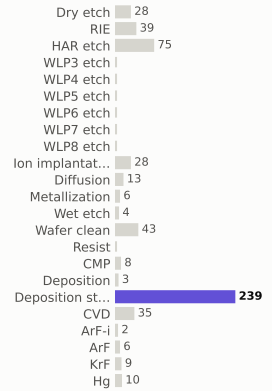

materials deposited (g)

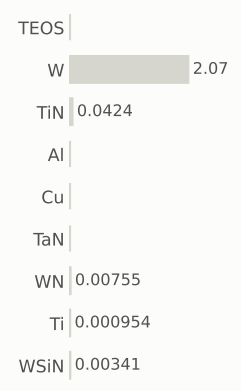

gases emitted (g)



Step #7250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	661.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

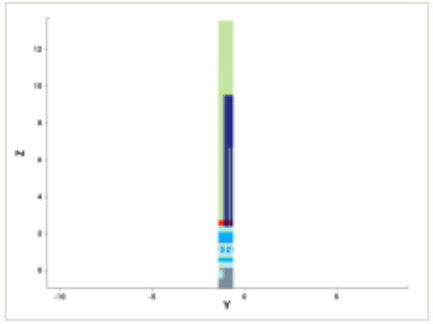

y cut at -1.035 µm

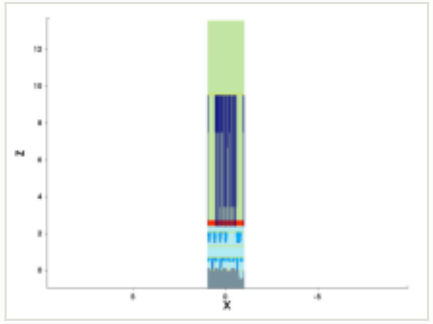

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

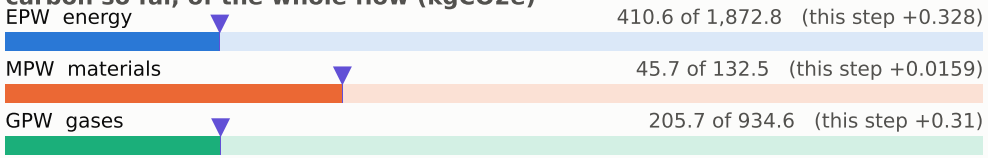

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

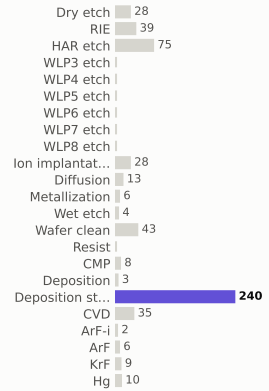

materials deposited (g)

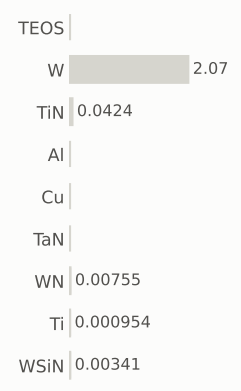

gases emitted (g)

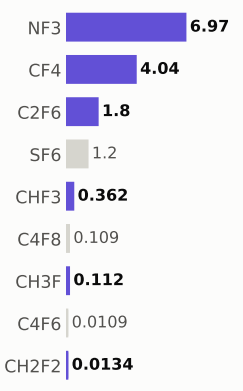

Step #7260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	662.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

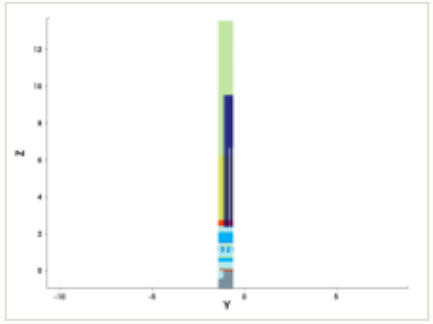

y cut at -1.035 µm

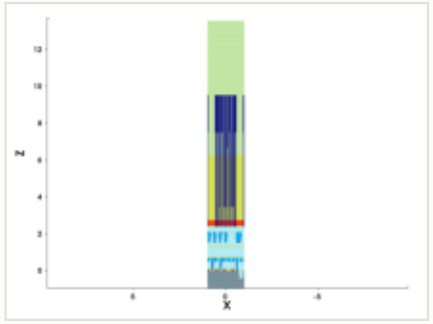

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 410.9 of 1,872.8 (this step +0.328)

MPW materials — 45.7 of 132.5 (this step +0.0159)

GPW gases — 206.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

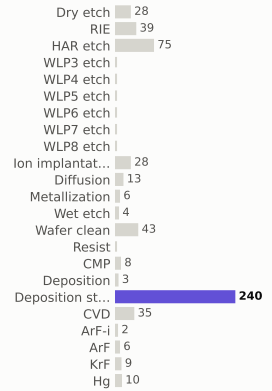

materials deposited (g)

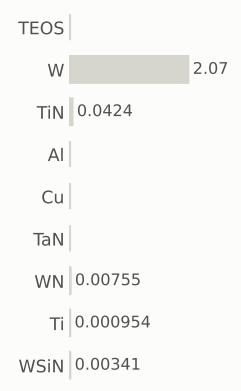

gases emitted (g)

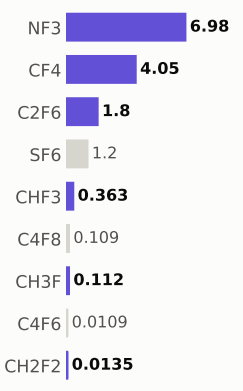

Step #7270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	663.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

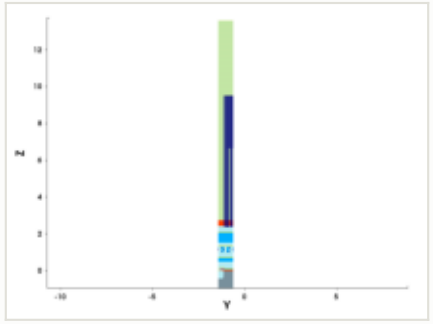

y cut at -1.035 µm

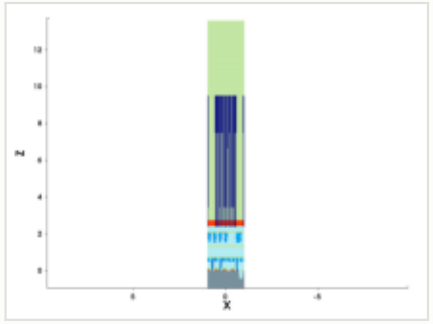

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

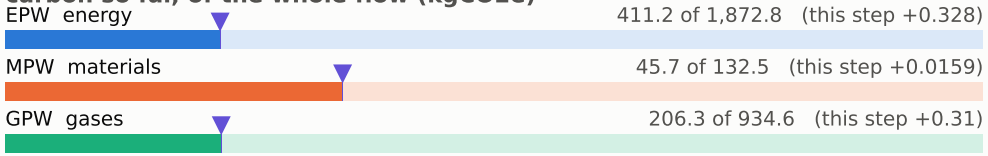

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

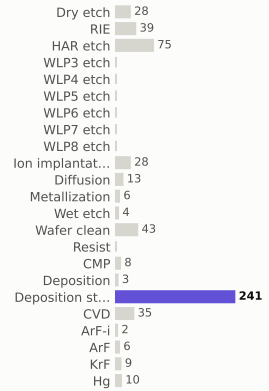

materials deposited (g)

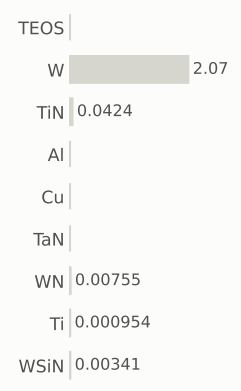

gases emitted (g)



Step #7280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	663.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

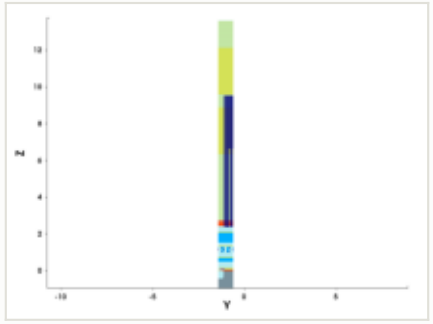

y cut at -1.035 µm

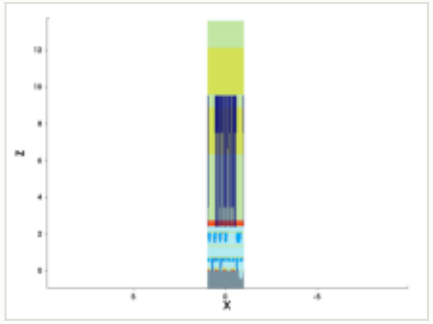

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 411.5 of 1,872.8 (this step +0.328)

MPW materials — 45.7 of 132.5 (this step +0.0159)

GPW gases — 206.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

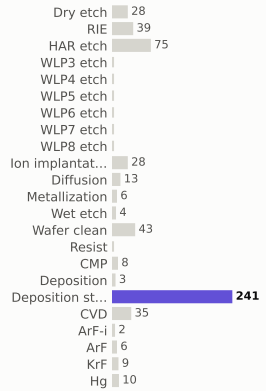

materials deposited (g)

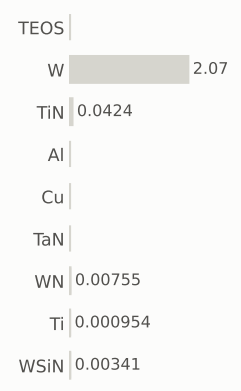

gases emitted (g)

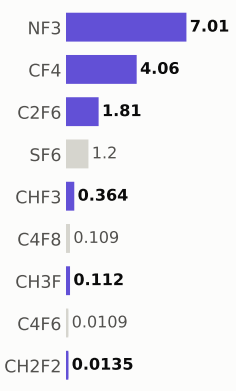

Step #7290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	664.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

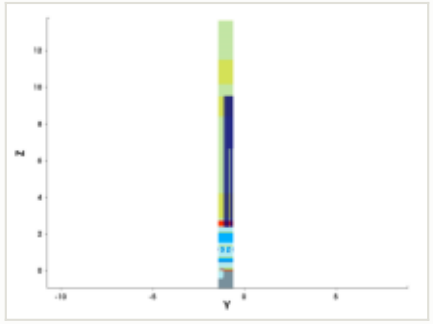

y cut at -1.035 µm

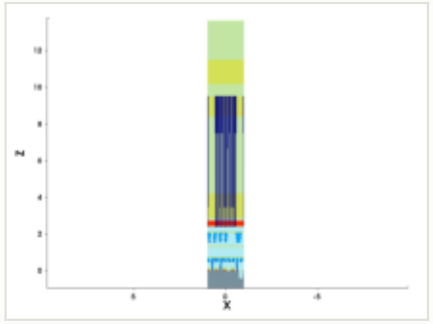

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

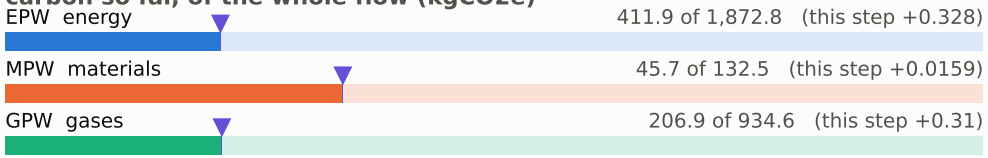

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

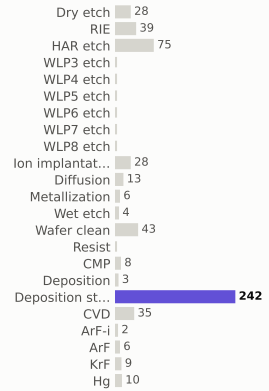

materials deposited (g)

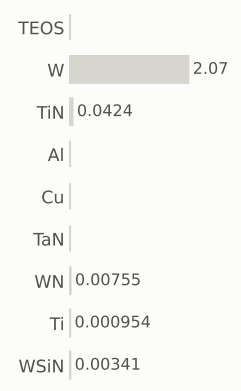

gases emitted (g)

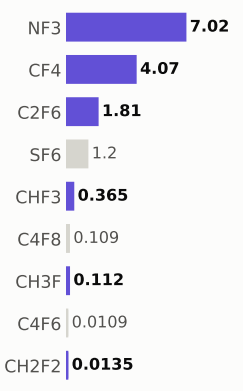

Step #7300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	665.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

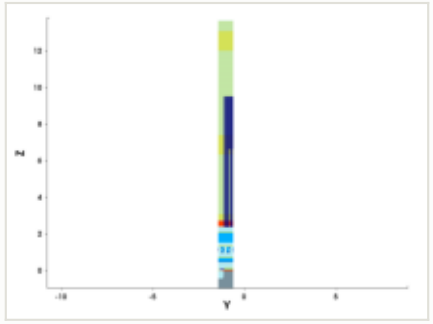

y cut at -1.035 µm

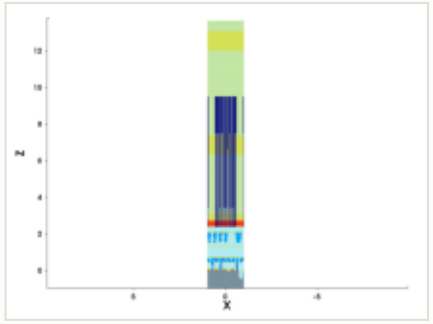

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

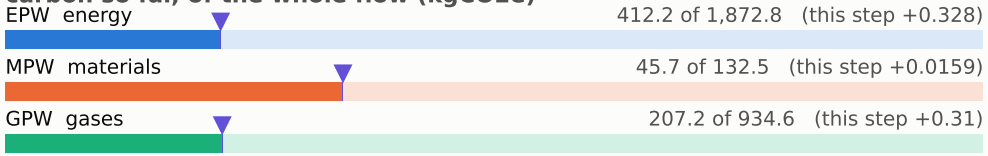

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

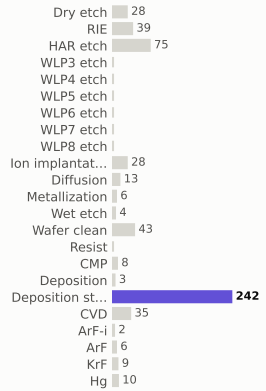

materials deposited (g)

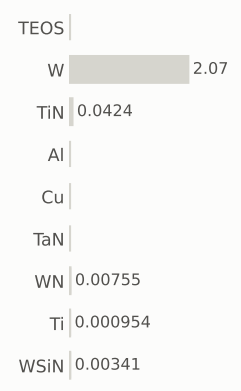

gases emitted (g)

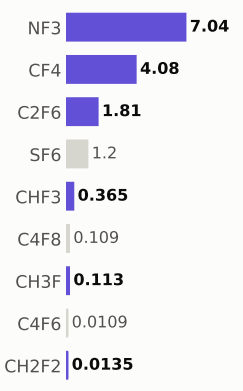

Step #7310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	665.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

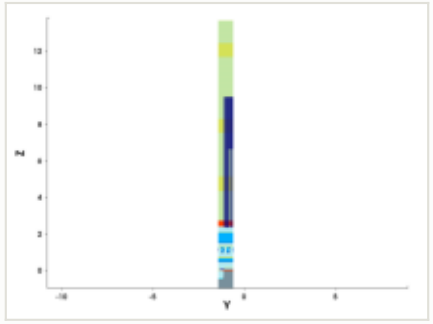

y cut at -1.035 µm

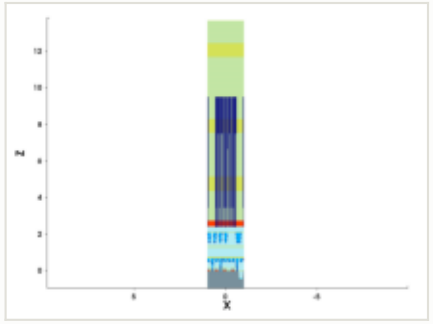

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

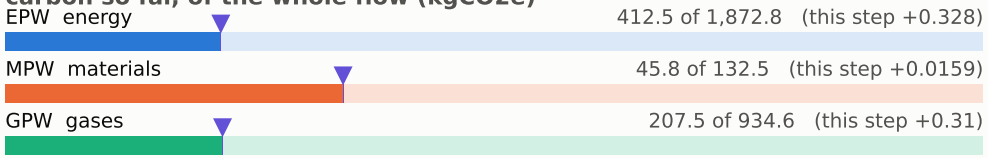

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

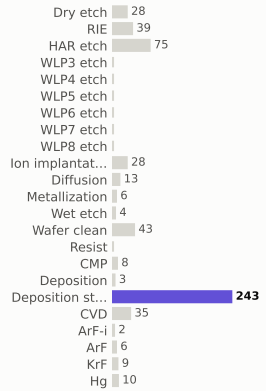

materials deposited (g)

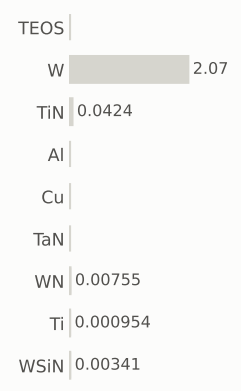

gases emitted (g)

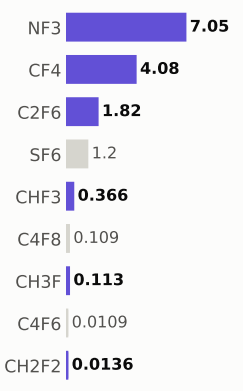

Step #7320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	666.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

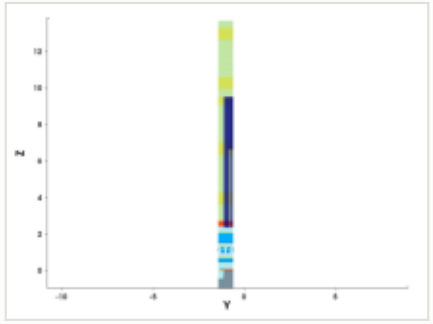

y cut at -1.035 µm

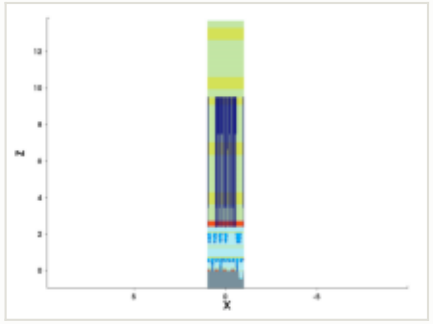

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 412.9 of 1,872.8 (this step +0.328)

MPW materials — 45.8 of 132.5 (this step +0.0159)

GPW gases — 207.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

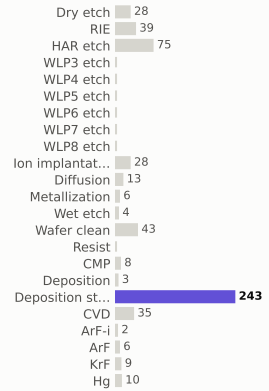

materials deposited (g)

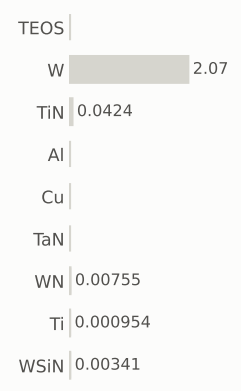

gases emitted (g)

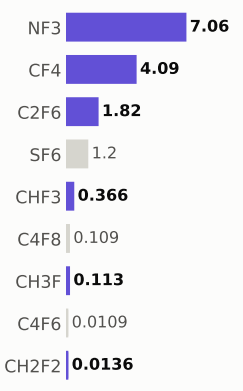

Step #7330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	667.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

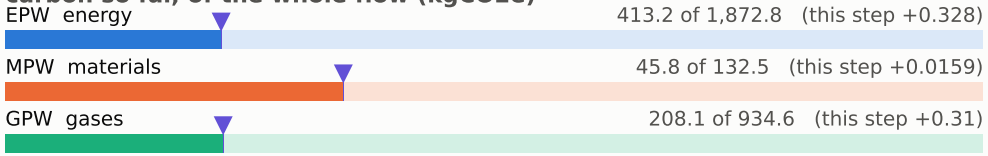

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

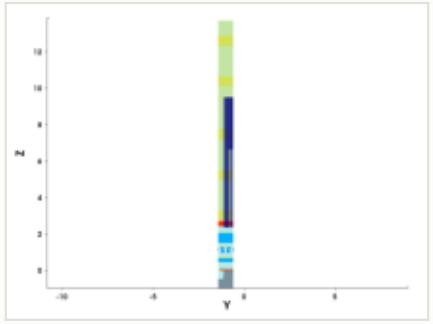

y cut at -1.035 µm

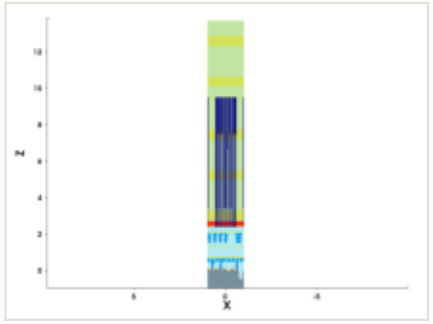

mask for this step

no mask for this step

steps by process area

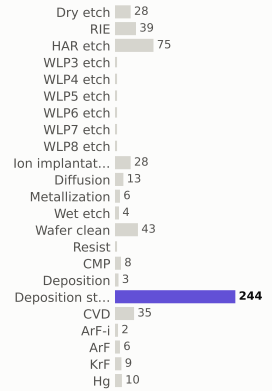

materials deposited (g)

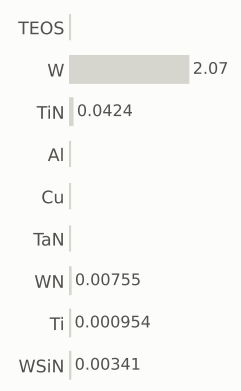

gases emitted (g)

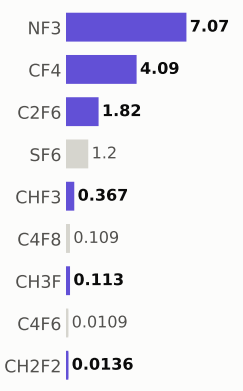

Step #7340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	667.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

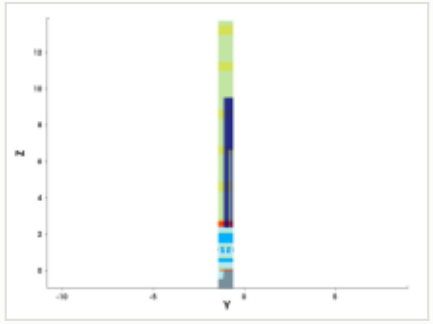

y cut at -1.035 µm

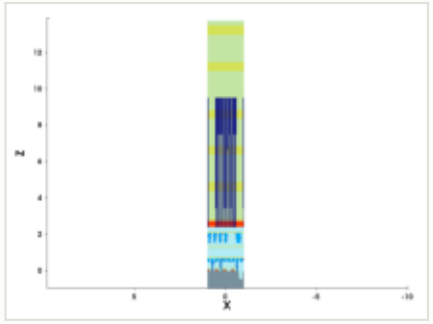

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 413.5 of 1,872.8 (this step +0.328)

MPW materials — 45.8 of 132.5 (this step +0.0159)

GPW gases — 208.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

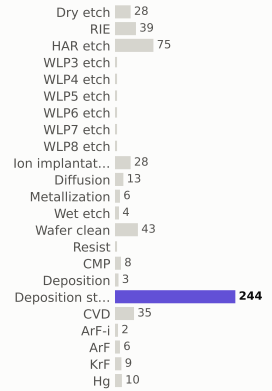

materials deposited (g)

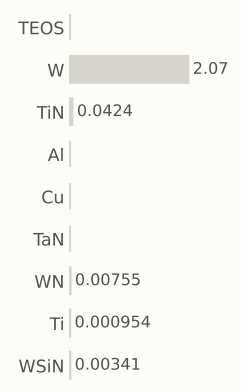

gases emitted (g)

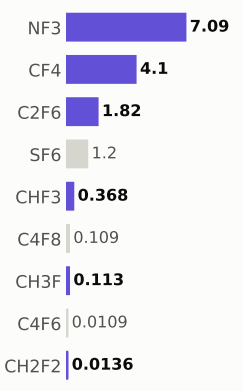

Step #7350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	668.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

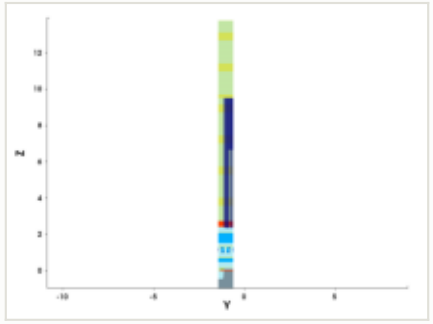

y cut at -1.035 µm

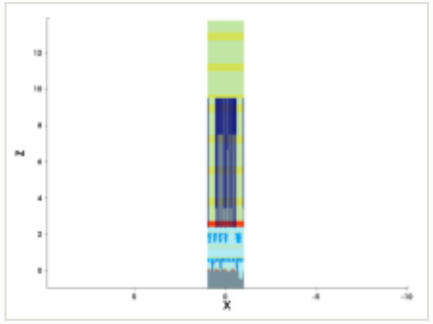

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

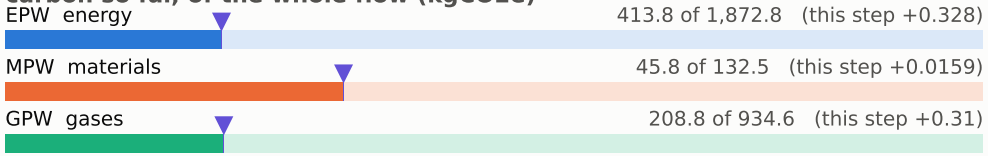

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

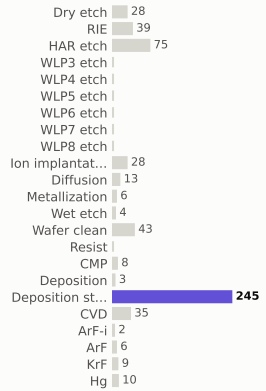

materials deposited (g)

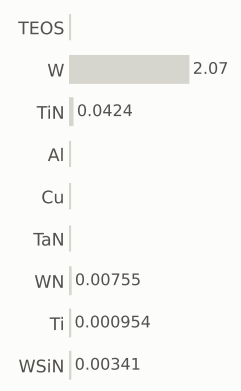

gases emitted (g)

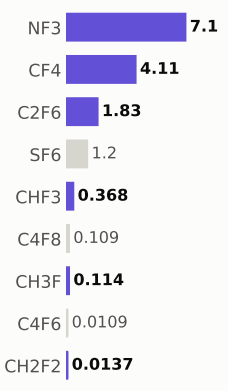

Step #7360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	669.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

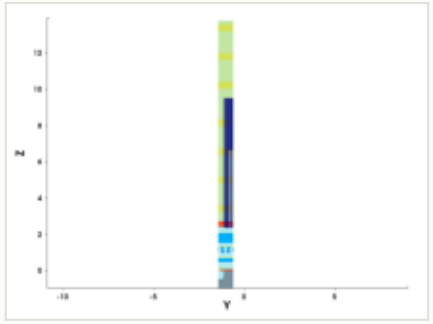

y cut at -1.035 µm

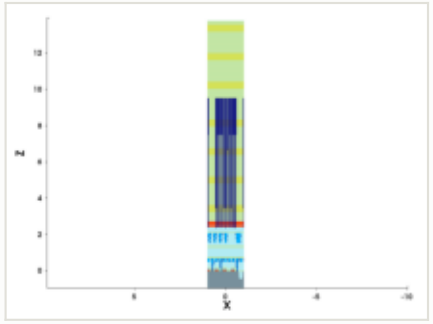

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

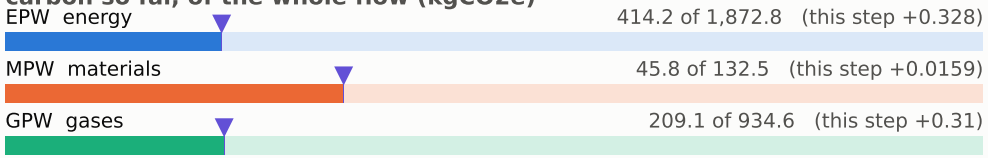

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

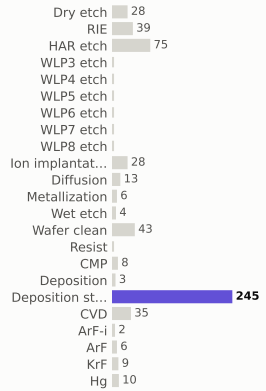

materials deposited (g)

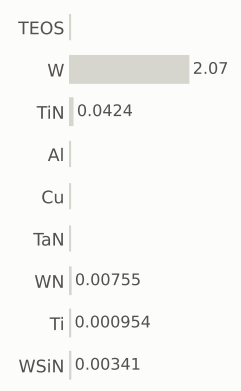

gases emitted (g)

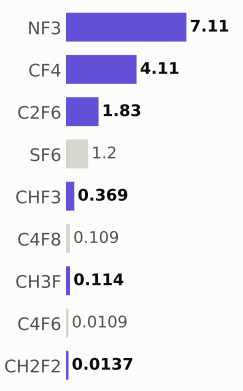

Step #7370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	669.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

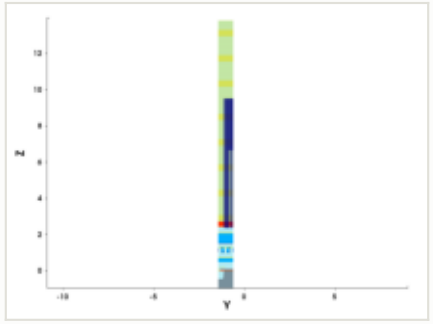

y cut at -1.035 µm

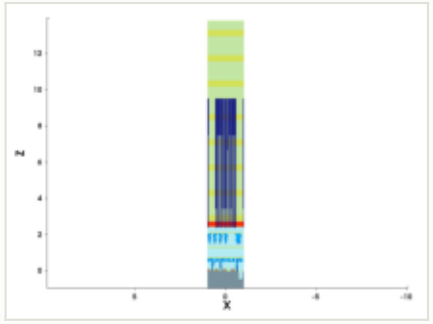

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

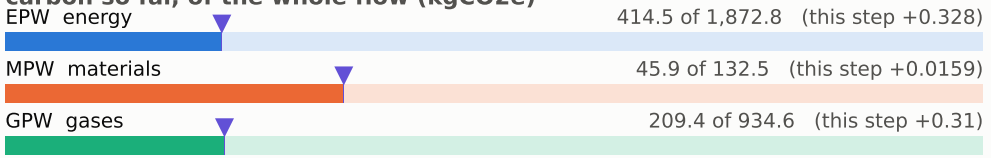

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

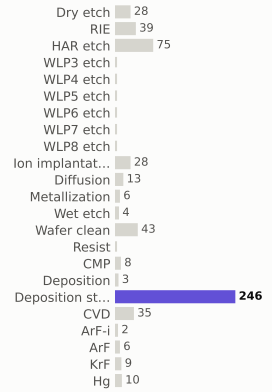

materials deposited (g)

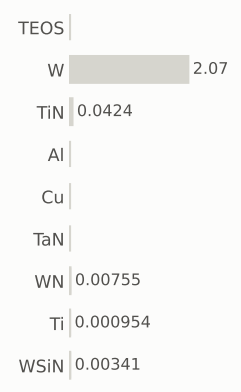

gases emitted (g)

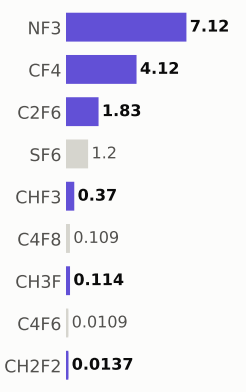

Step #7380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	670.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

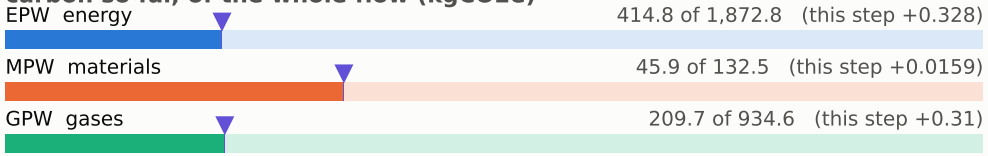

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

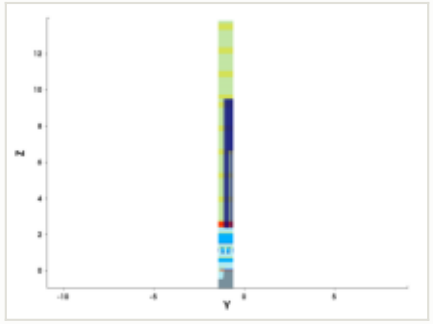

y cut at -1.035 µm

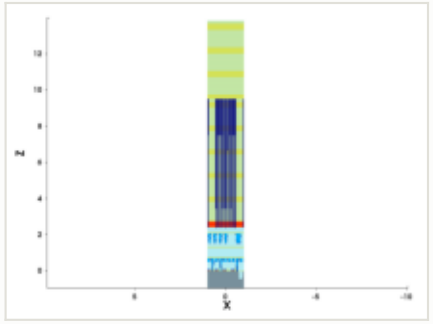

mask for this step

no mask for this step

steps by process area

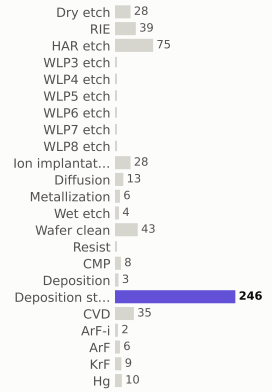

materials deposited (g)

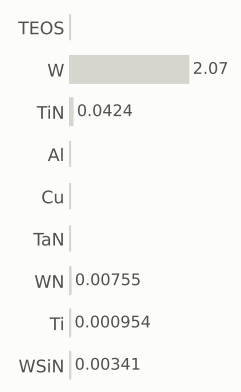

gases emitted (g)

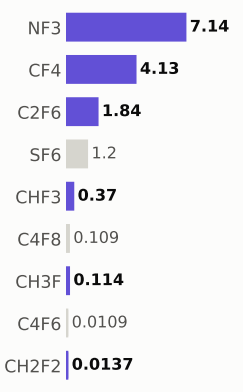

Step #7390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	671.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

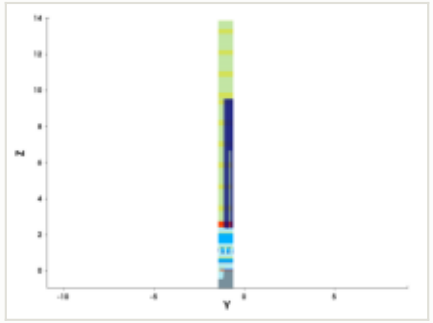

y cut at -1.035 µm

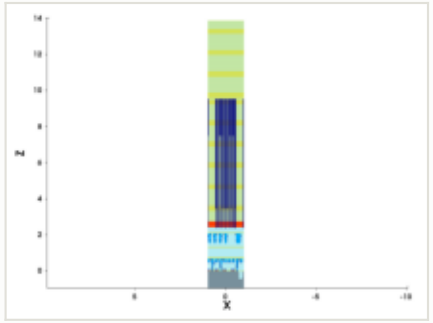

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

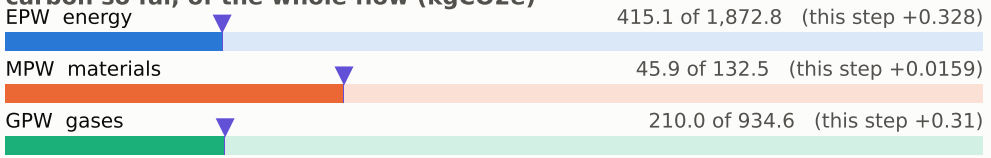

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

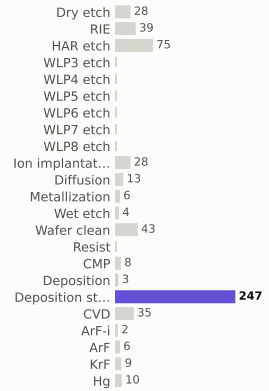

materials deposited (g)

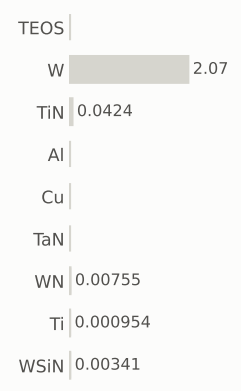

gases emitted (g)

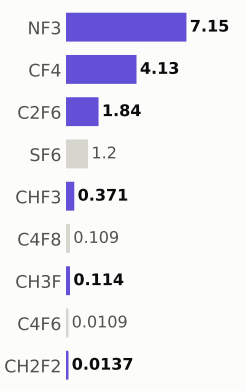

Step #7400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	671.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

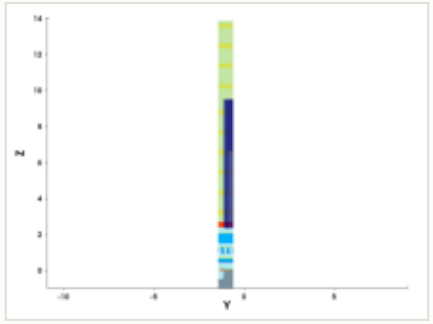

y cut at -1.035 µm

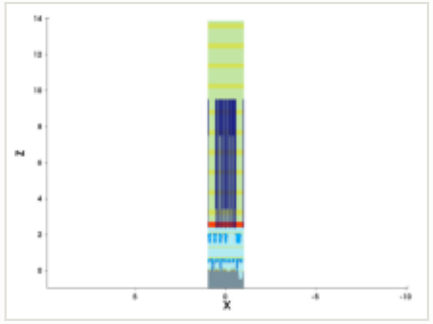

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

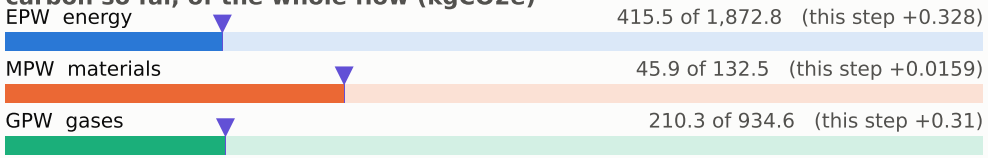

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

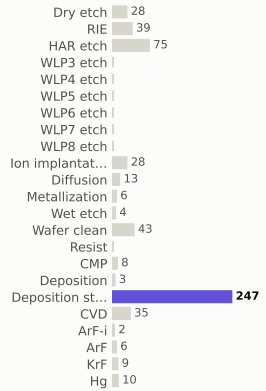

materials deposited (g)

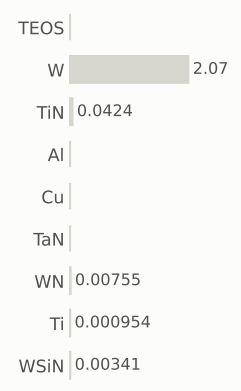

gases emitted (g)

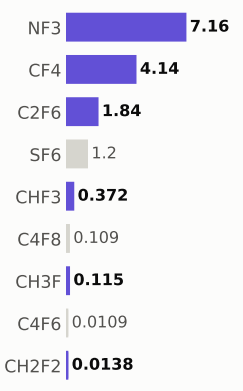

Step #7410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	672.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

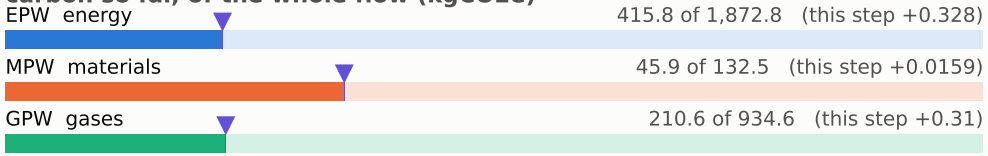

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

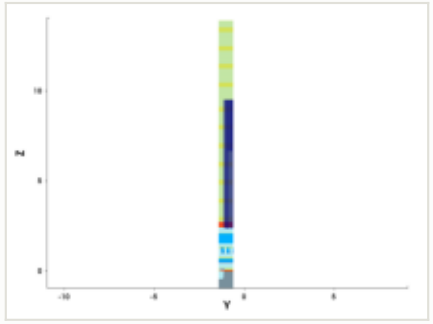

y cut at -1.035 µm

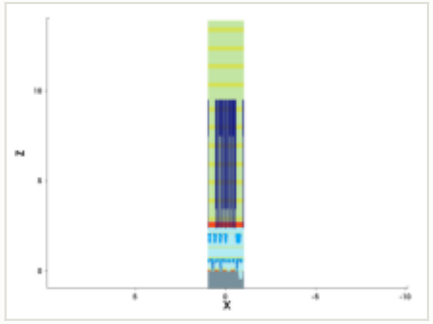

mask for this step

no mask for this step

steps by process area

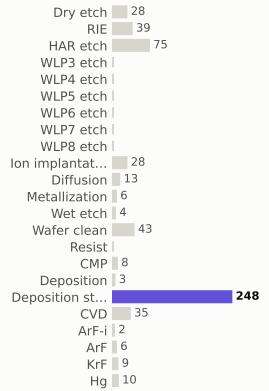

materials deposited (g)

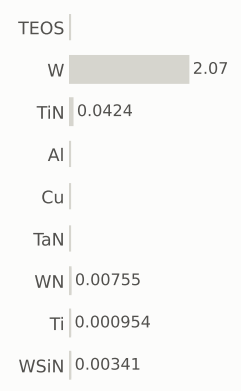

gases emitted (g)

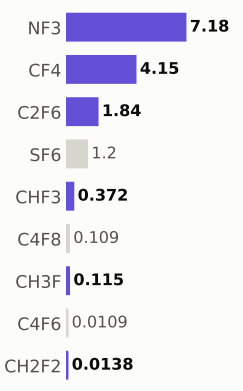

Step #7420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	673.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

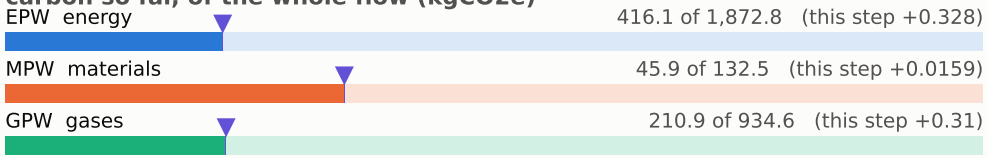

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

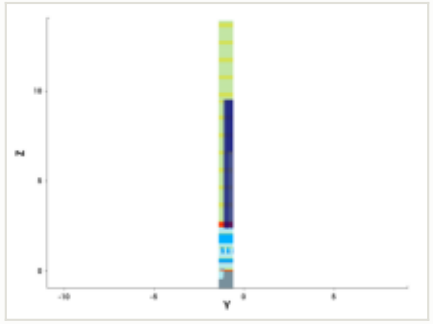

y cut at -1.035 µm

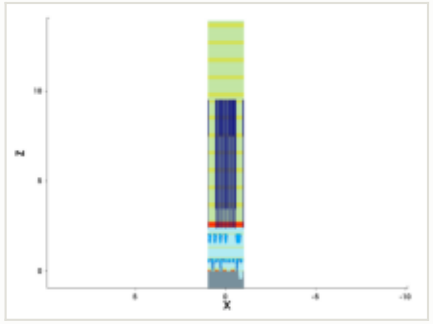

mask for this step

no mask for this step

steps by process area

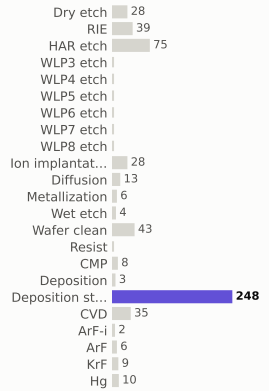

materials deposited (g)

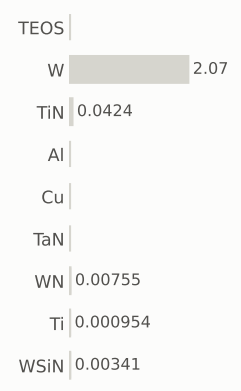

gases emitted (g)

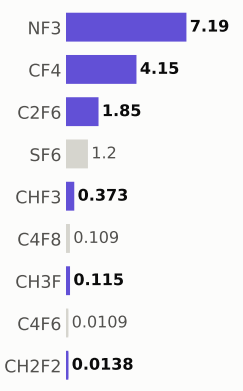

Step #7430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	673.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

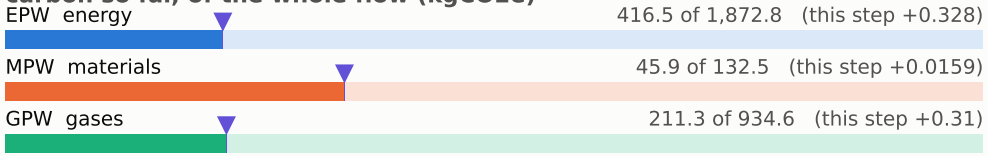

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

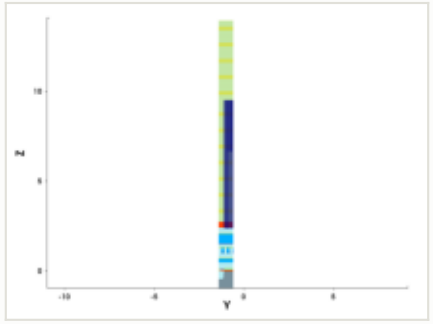

y cut at -1.035 µm

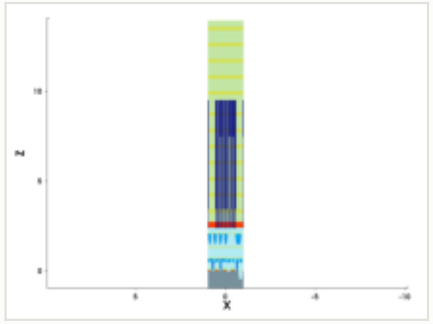

mask for this step

no mask for this step

steps by process area

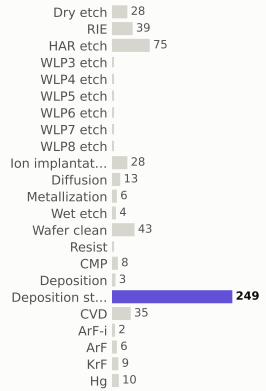

materials deposited (g)

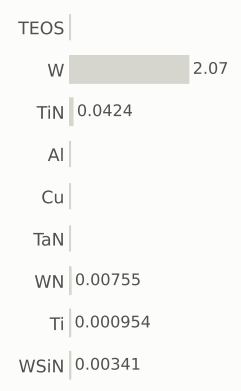

gases emitted (g)

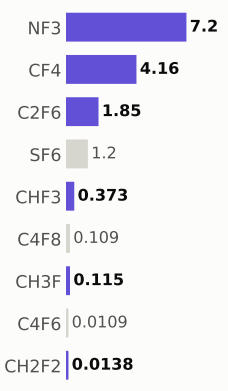

Step #7440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	674.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 416.8 of 1,872.8 (this step +0.328)

MPW materials — 46 of 132.5 (this step +0.0159)

GPW gases — 211.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

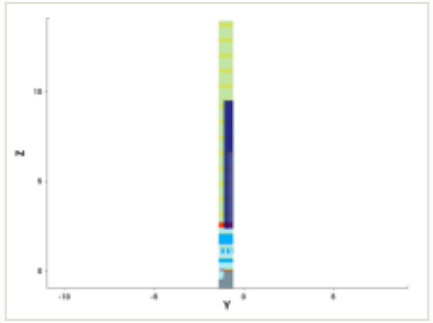

y cut at -1.035 µm

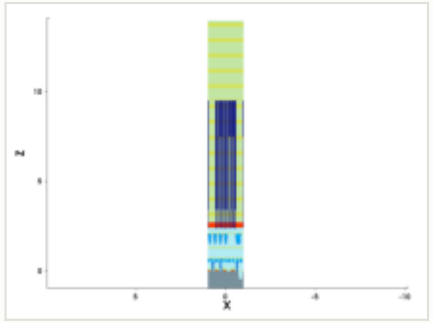

mask for this step

no mask for this step

steps by process area

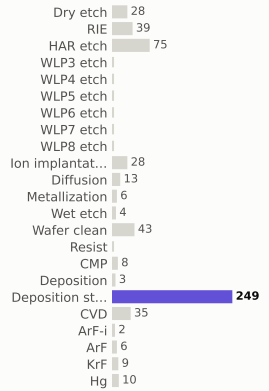

materials deposited (g)

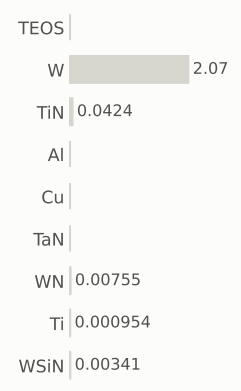

gases emitted (g)

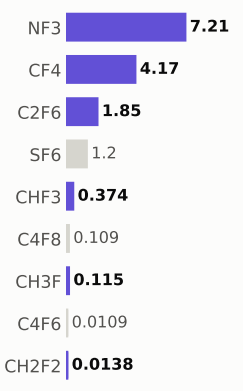

Step #7450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	675.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

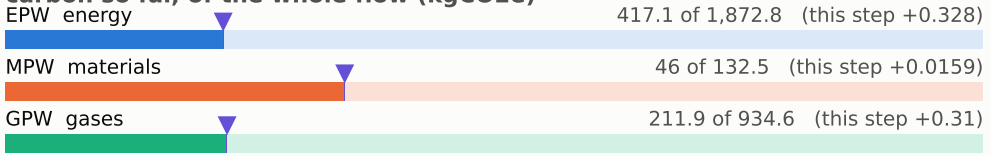

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

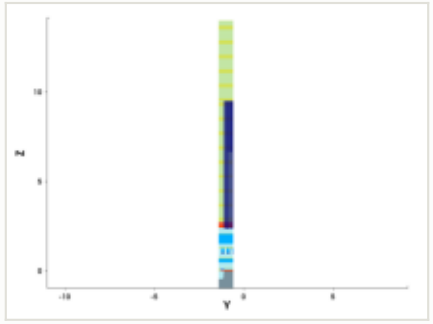

y cut at -1.035 µm

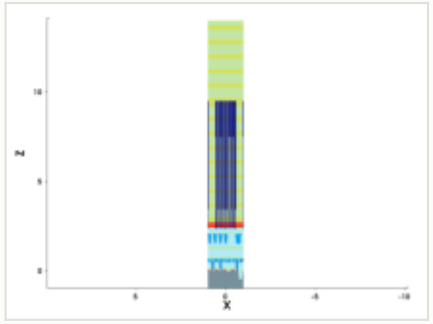

mask for this step

no mask for this step

steps by process area

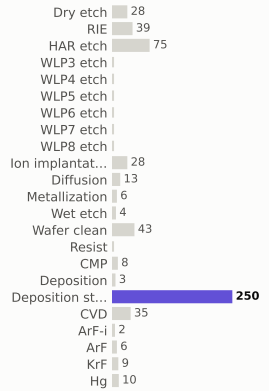

materials deposited (g)

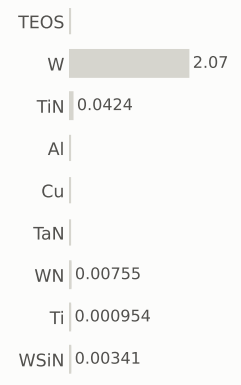

gases emitted (g)



Step #7460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	675.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

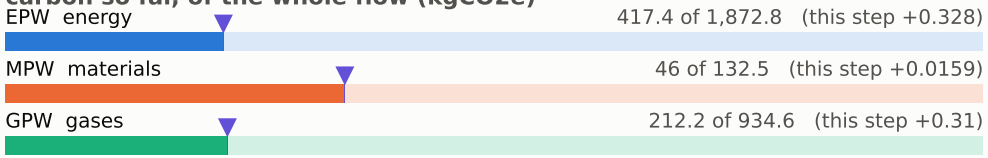

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

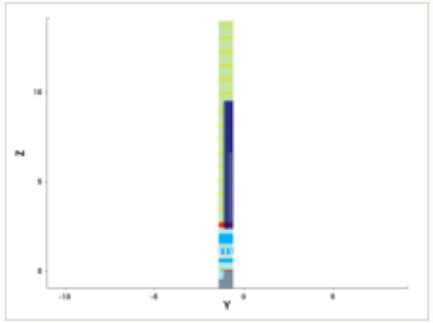

y cut at -1.035 µm

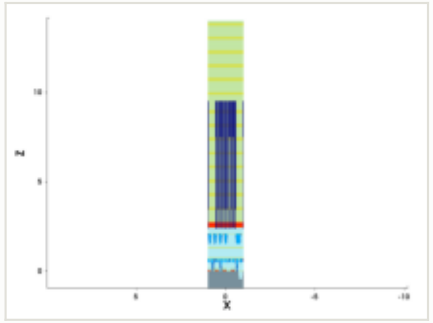

mask for this step

no mask for this step

steps by process area

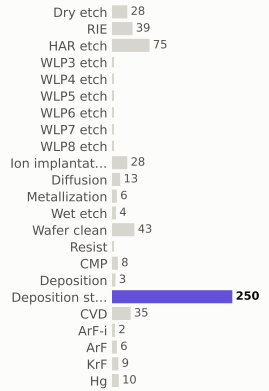

materials deposited (g)

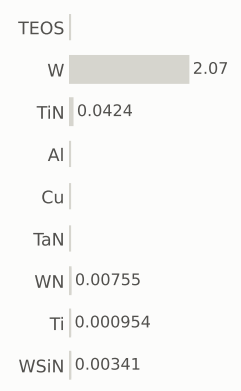

gases emitted (g)



Step #7470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	676.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

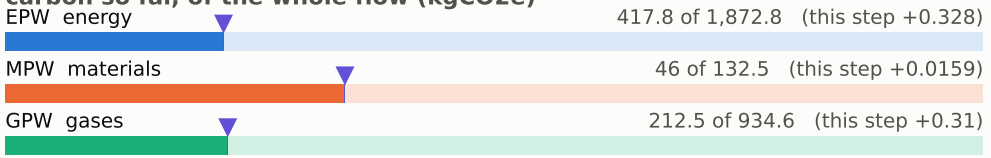

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

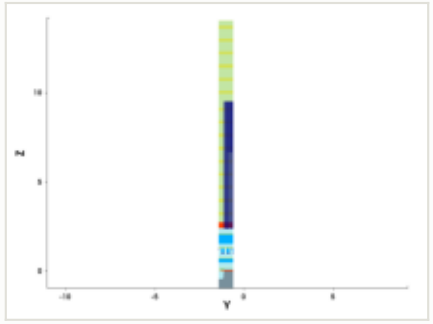

y cut at -1.035 µm

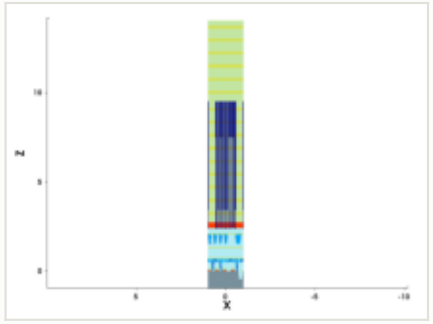

mask for this step

no mask for this step

steps by process area

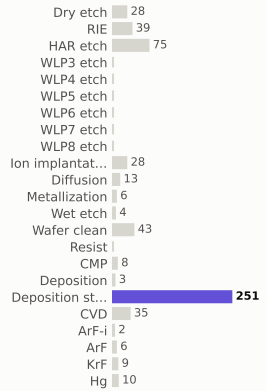

materials deposited (g)

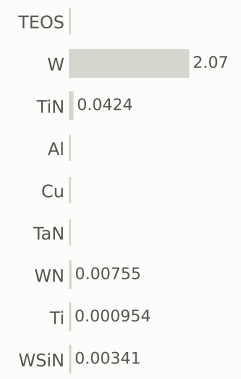

gases emitted (g)

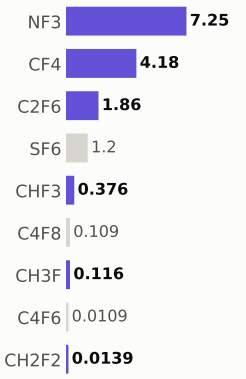

Step #7480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	676.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

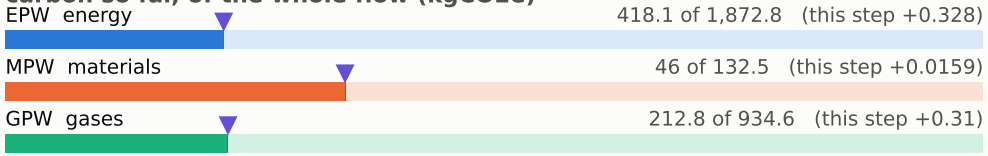

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

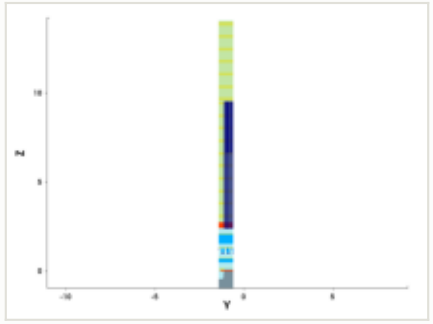

y cut at -1.035 µm

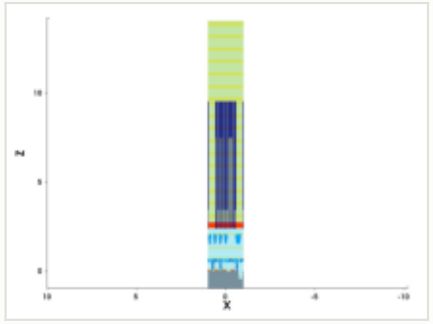

mask for this step

no mask for this step

steps by process area

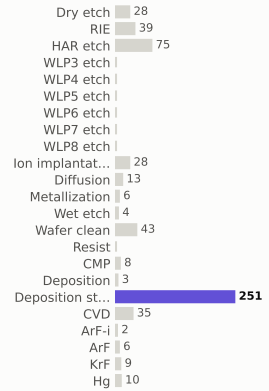

materials deposited (g)

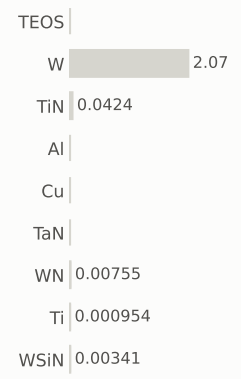

gases emitted (g)

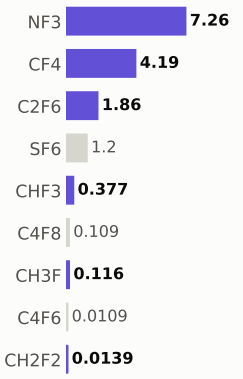

Step #7490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	677.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

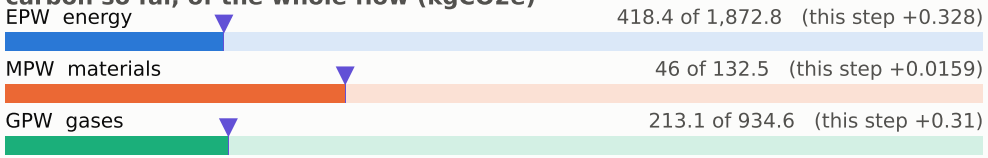

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

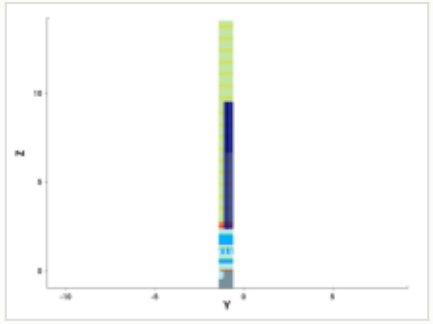

y cut at -1.035 µm

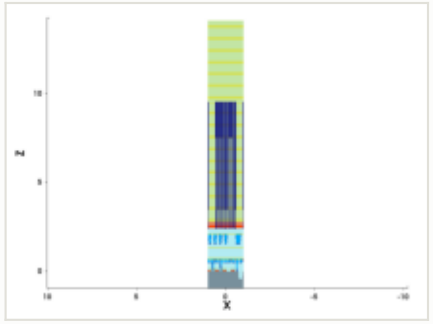

mask for this step

no mask for this step

steps by process area

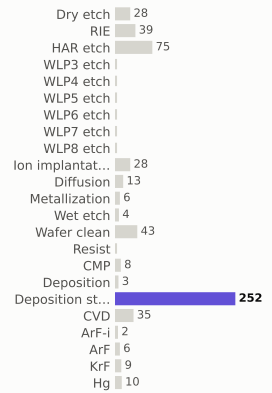

materials deposited (g)

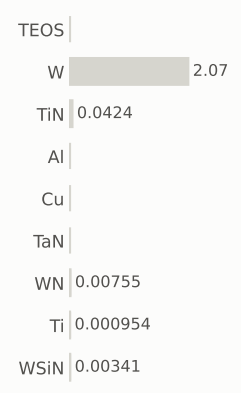

gases emitted (g)

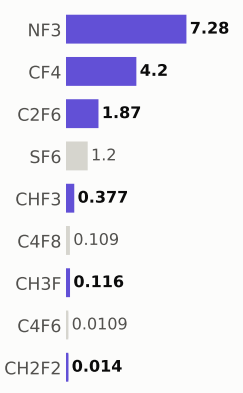

Step #7500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	678.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

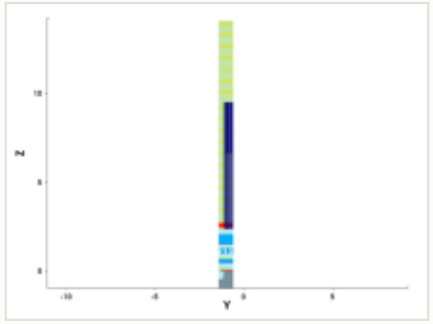

y cut at -1.035 µm

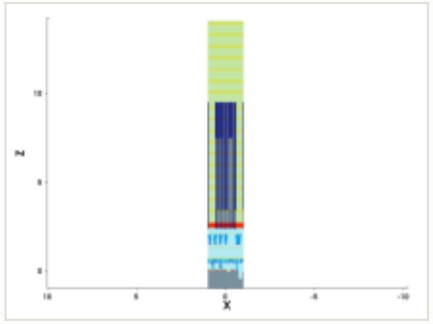

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

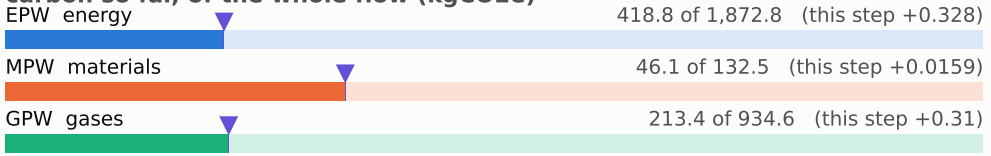

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

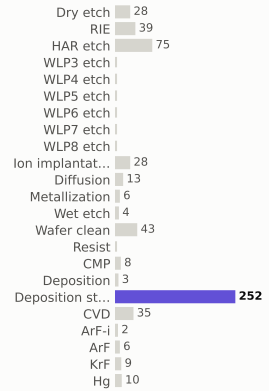

materials deposited (g)

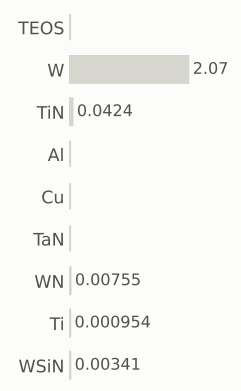

gases emitted (g)

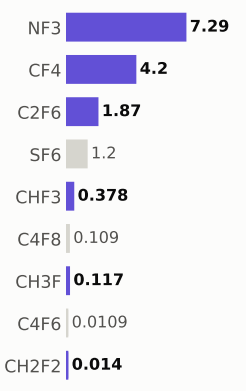

Step #7510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	678.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

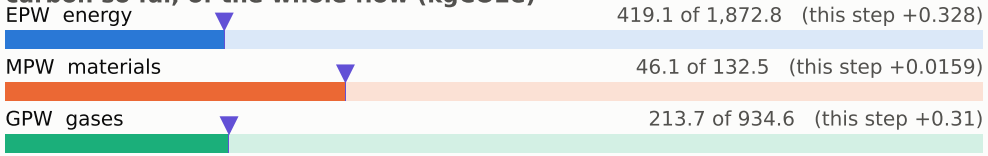

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

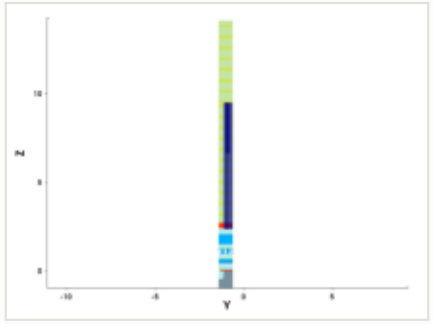

y cut at -1.035 µm

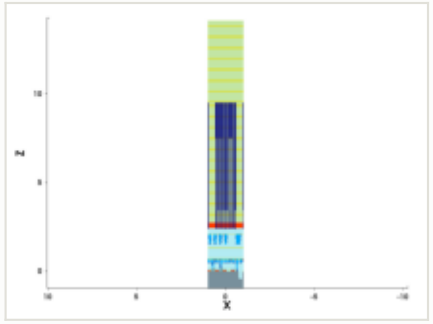

mask for this step

no mask for this step

steps by process area

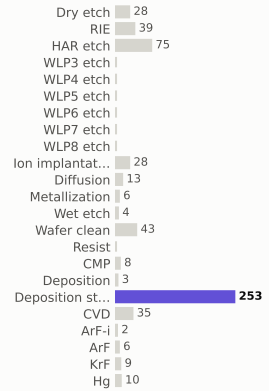

materials deposited (g)

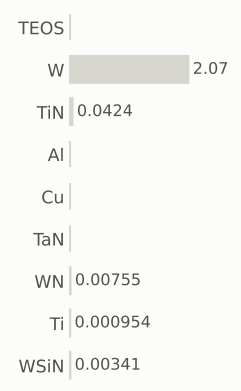

gases emitted (g)

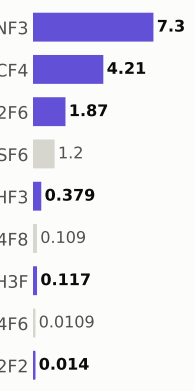

Step #7520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	679.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

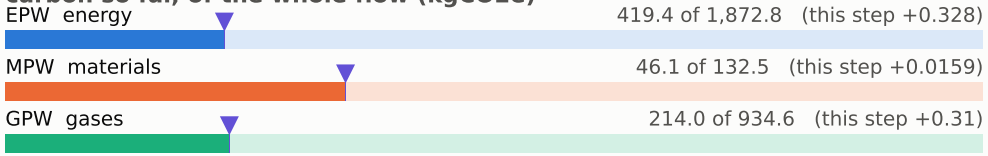

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

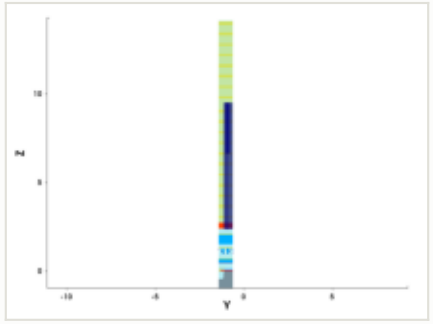

y cut at -1.035 µm

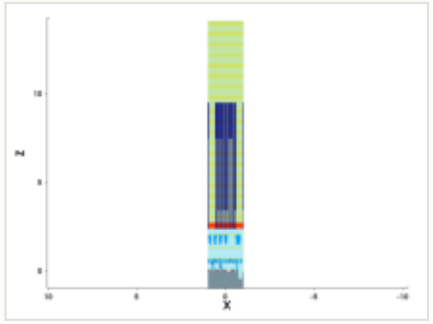

mask for this step

no mask for this step

steps by process area

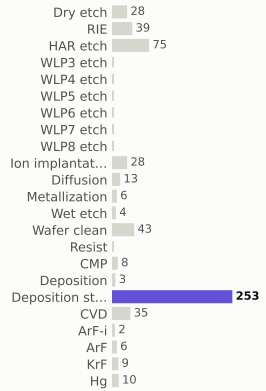

materials deposited (g)

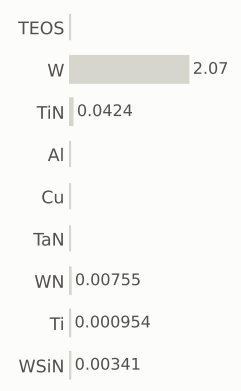

gases emitted (g)

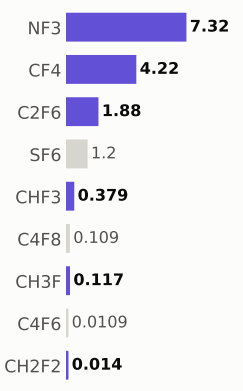

Step #7530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	680.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

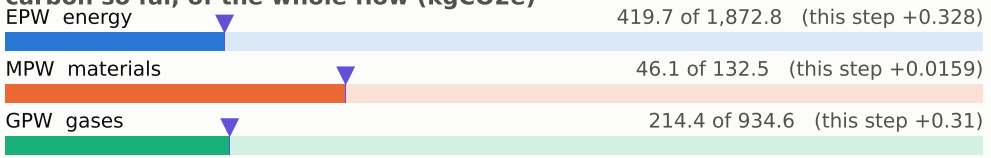

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

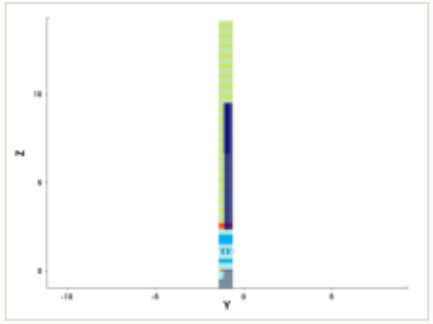

y cut at -1.035 µm

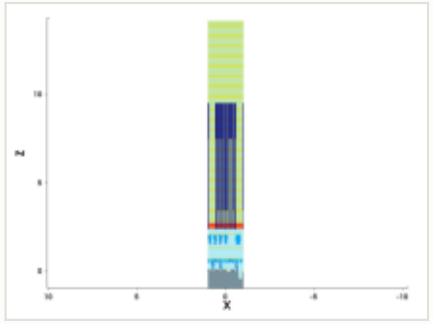

mask for this step

no mask for this step

steps by process area

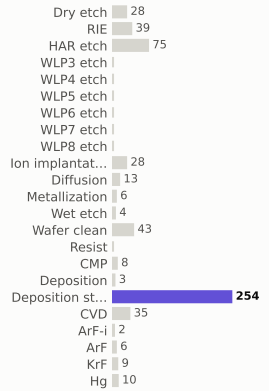

materials deposited (g)

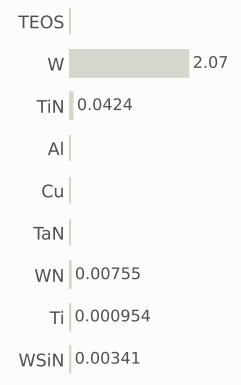

gases emitted (g)



Step #7540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	680.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

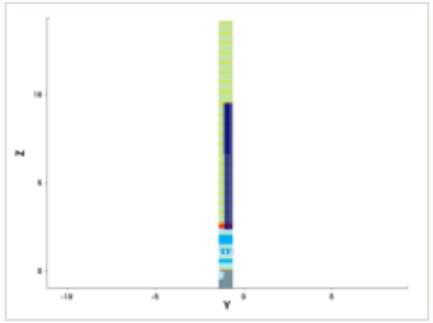

y cut at -1.035 µm

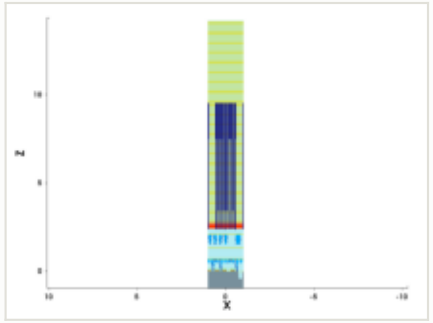

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

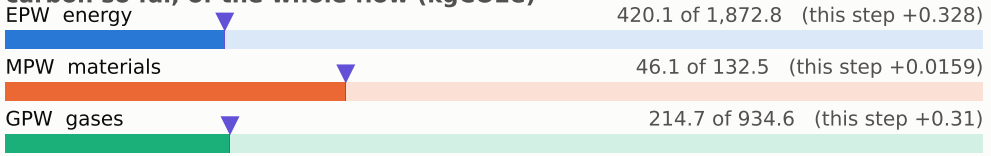

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

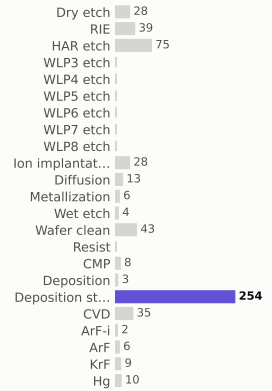

materials deposited (g)

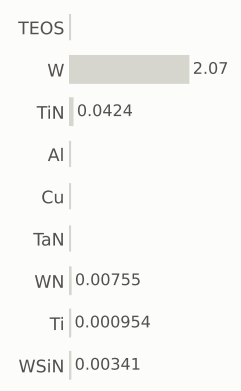

gases emitted (g)

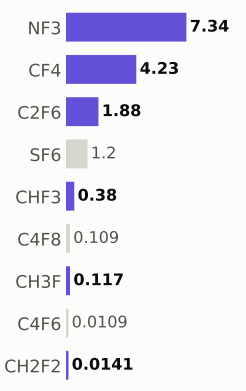

Step #7550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	681.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

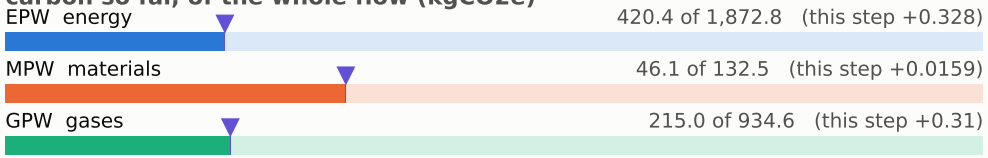

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

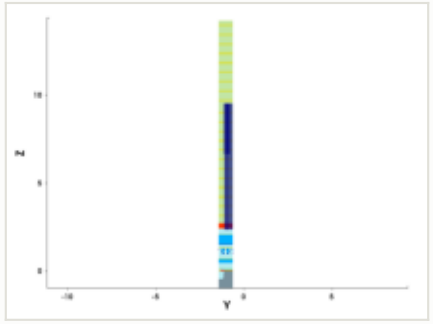

y cut at -1.035 µm

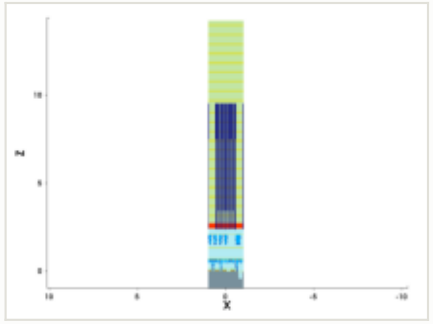

mask for this step

no mask for this step

steps by process area

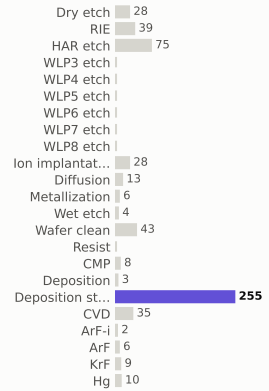

materials deposited (g)

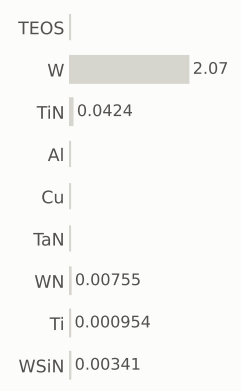

gases emitted (g)

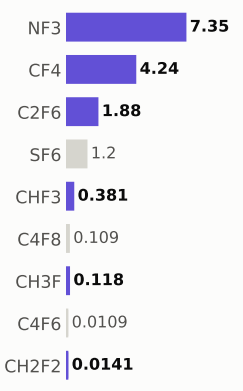

Step #7560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	682.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

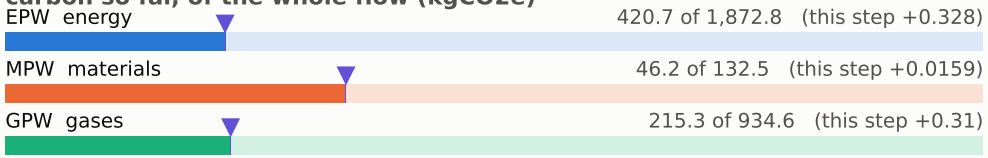

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

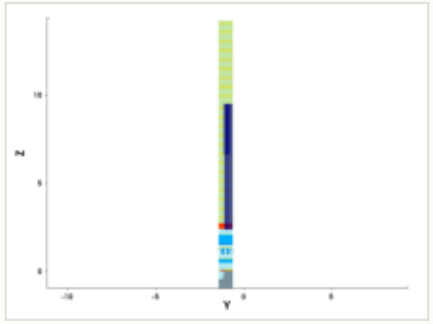

y cut at -1.035 µm

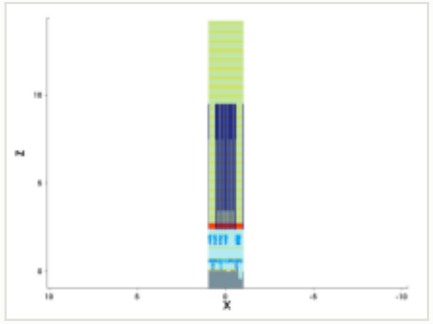

mask for this step

no mask for this step

steps by process area

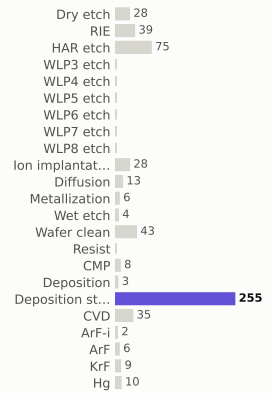

materials deposited (g)

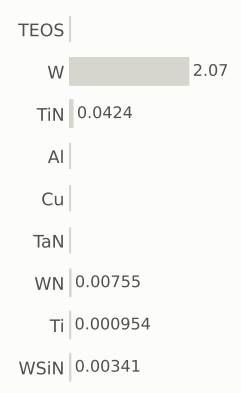

gases emitted (g)

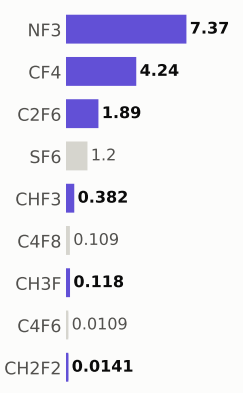

Step #7570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	682.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

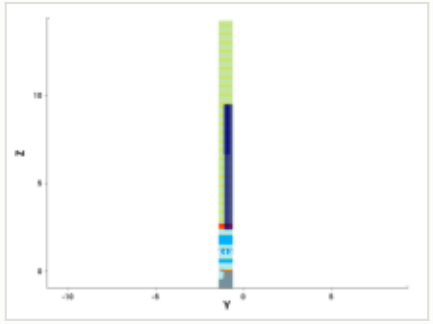

y cut at -1.035 µm

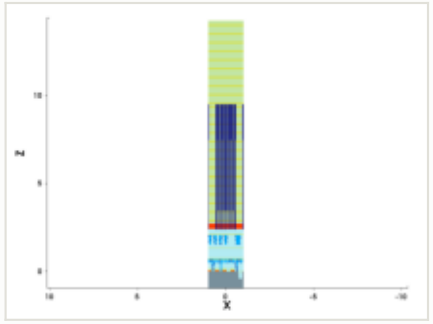

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

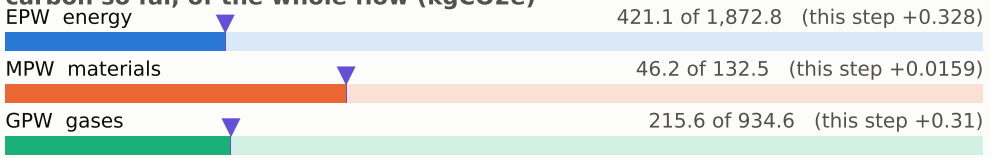

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

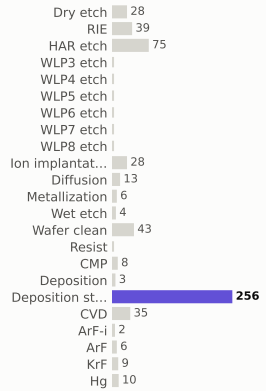

materials deposited (g)

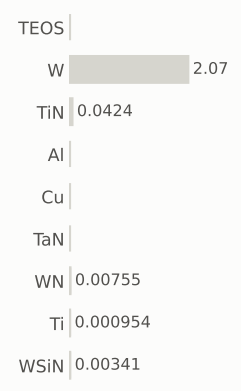

gases emitted (g)

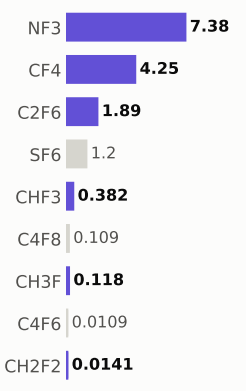

Step #7580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	683.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

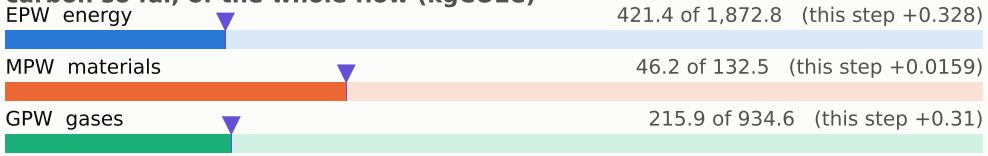

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

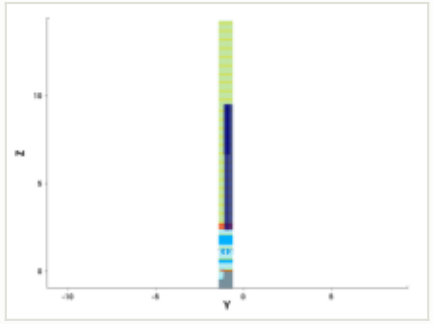

y cut at -1.035 µm

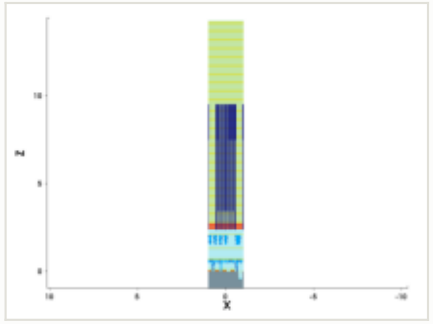

mask for this step

no mask for this step

steps by process area

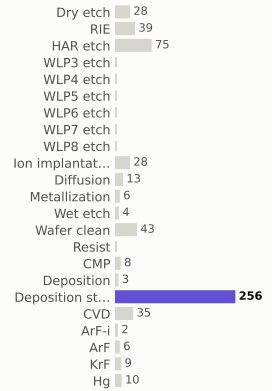

materials deposited (g)

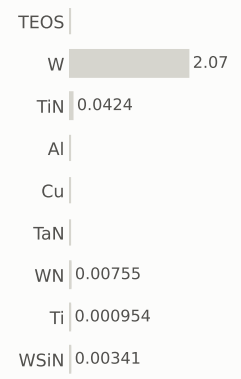

gases emitted (g)

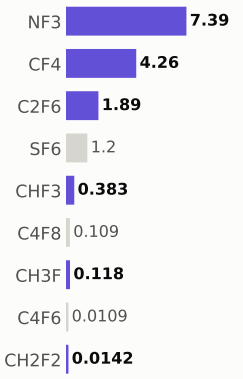

Step #7590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	684.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

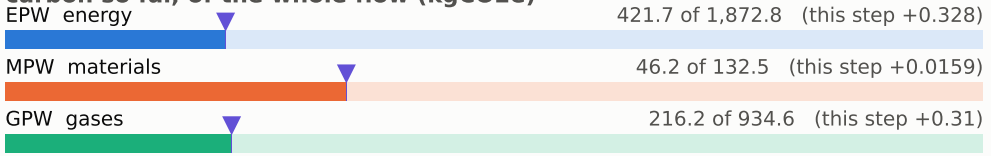

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

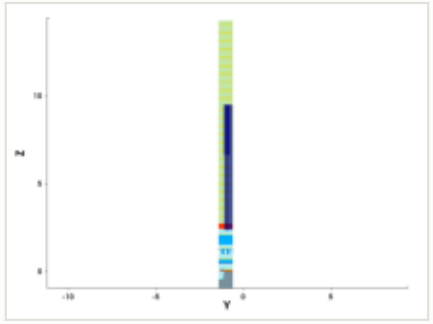

y cut at -1.035 µm

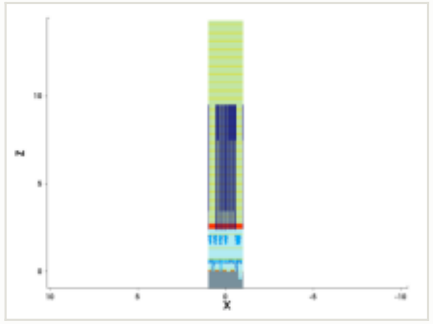

mask for this step

no mask for this step

steps by process area

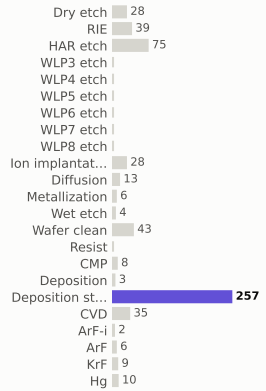

materials deposited (g)

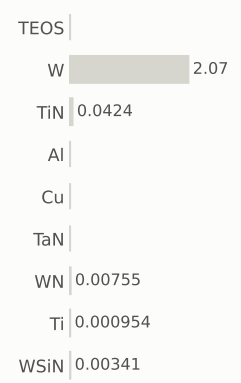

gases emitted (g)



Step #7600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	684.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

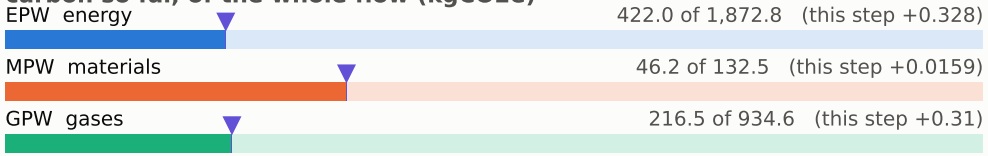

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

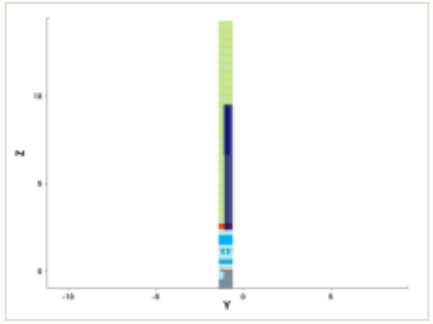

y cut at -1.035 µm

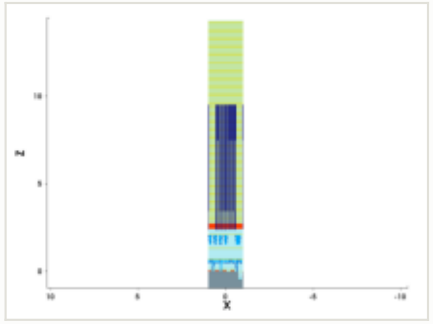

mask for this step

no mask for this step

steps by process area

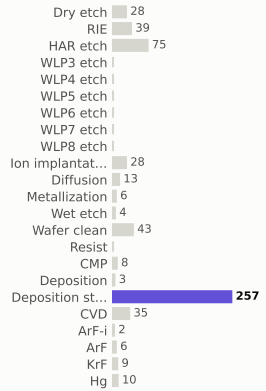

materials deposited (g)

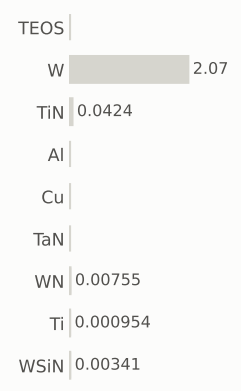

gases emitted (g)

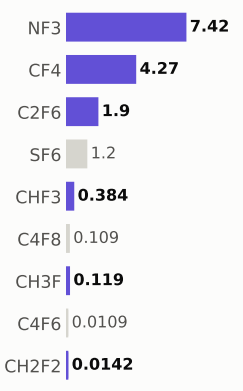

Step #7610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	685.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

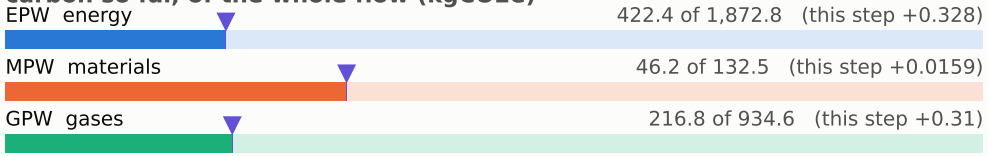

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

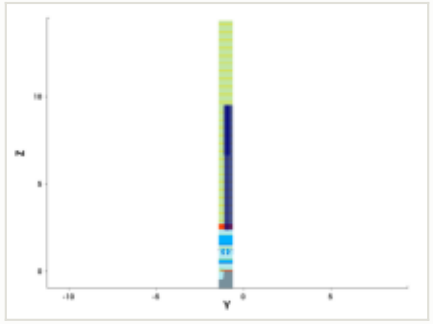

y cut at -1.035 µm

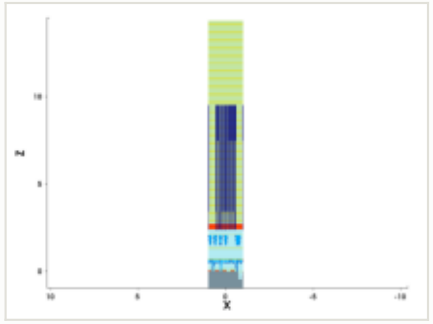

mask for this step

no mask for this step

steps by process area

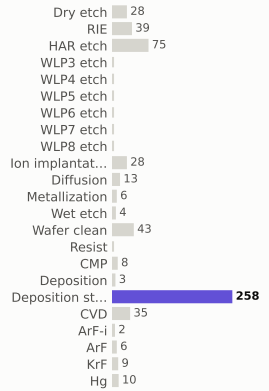

materials deposited (g)

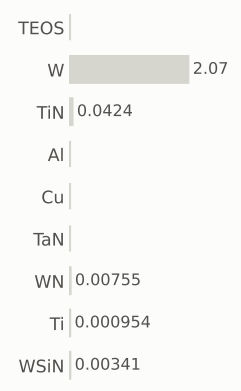

gases emitted (g)

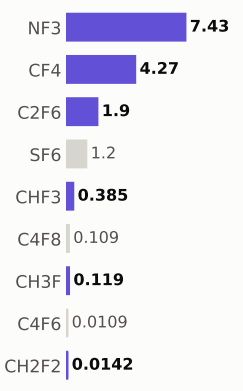

Step #7620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	686.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

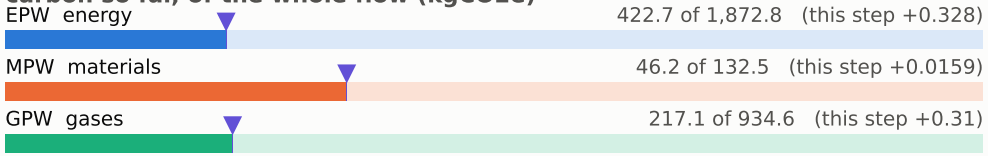

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

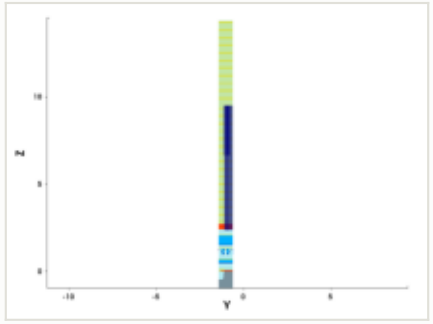

y cut at -1.035 µm

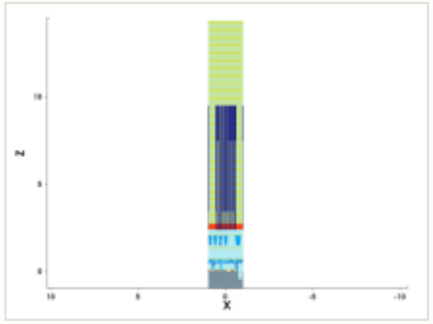

mask for this step

no mask for this step

steps by process area

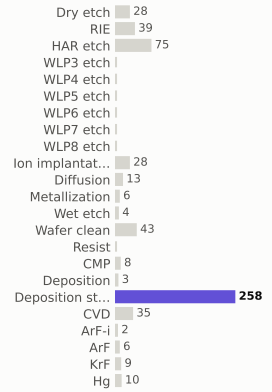

materials deposited (g)

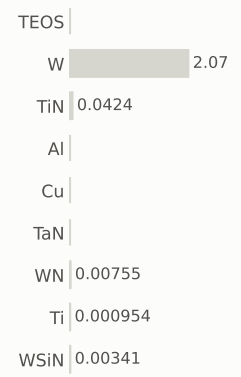

gases emitted (g)

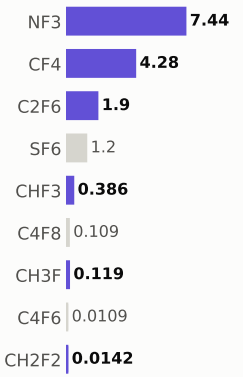

Step #7630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	686.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

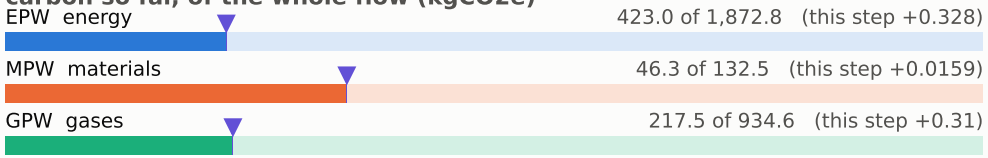

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

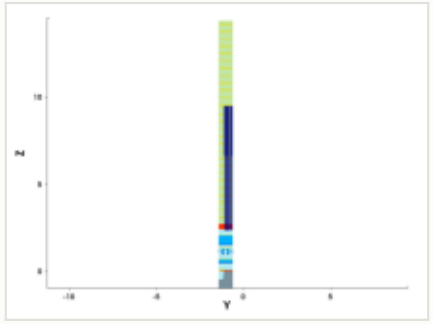

y cut at -1.035 µm

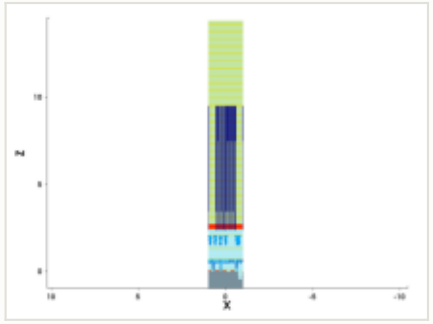

mask for this step

no mask for this step

steps by process area

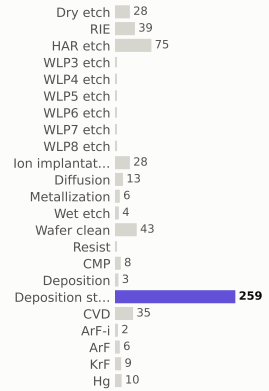

materials deposited (g)

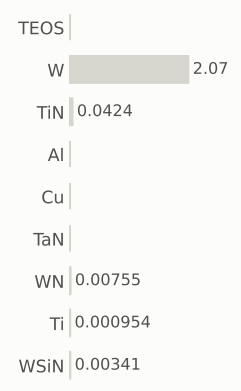

gases emitted (g)

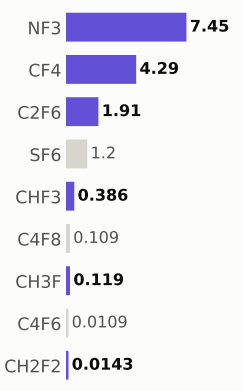

Step #7640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	687.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

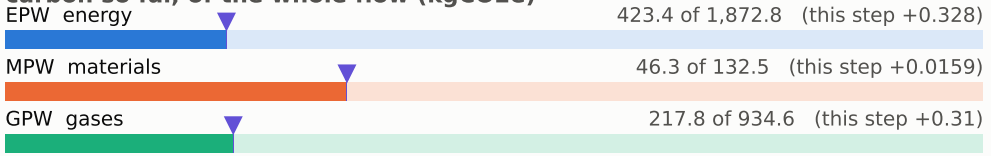

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

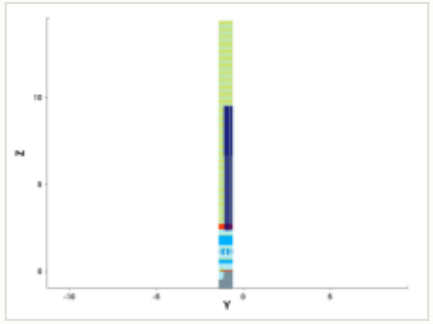

y cut at -1.035 µm

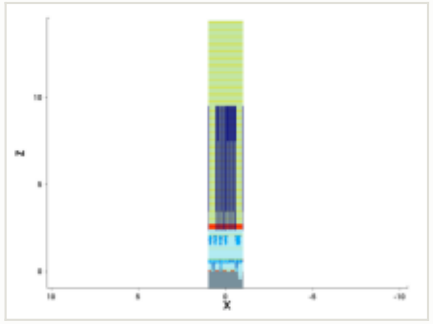

mask for this step

no mask for this step

steps by process area

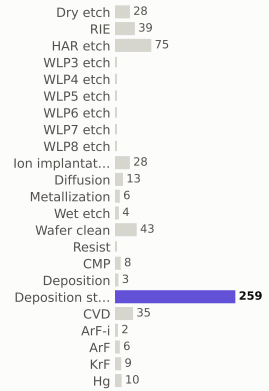

materials deposited (g)

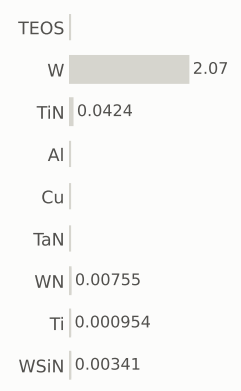

gases emitted (g)

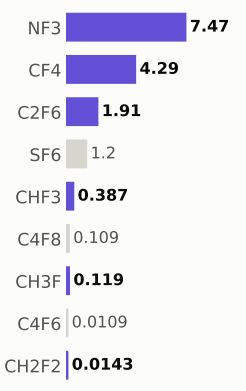

Step #7650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	688.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

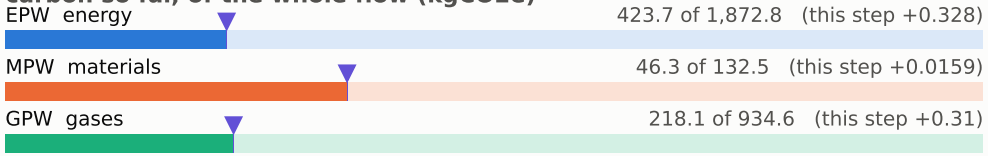

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

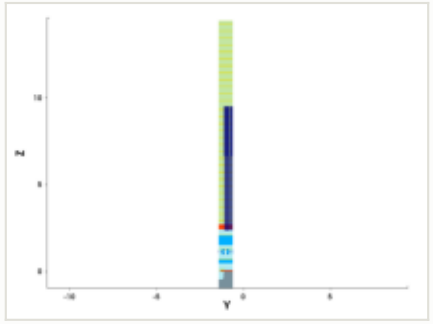

y cut at -1.035 µm

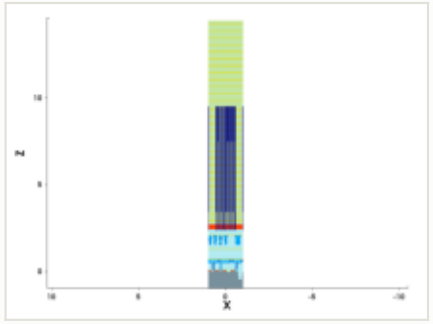

mask for this step

no mask for this step

steps by process area

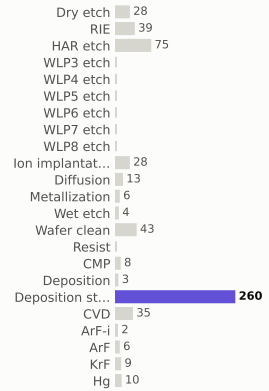

materials deposited (g)

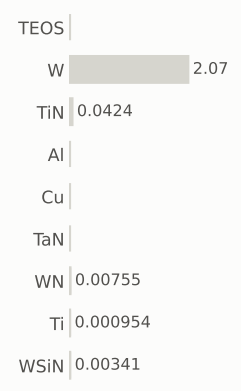

gases emitted (g)

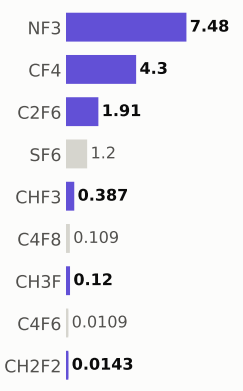

Step #7660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	688.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

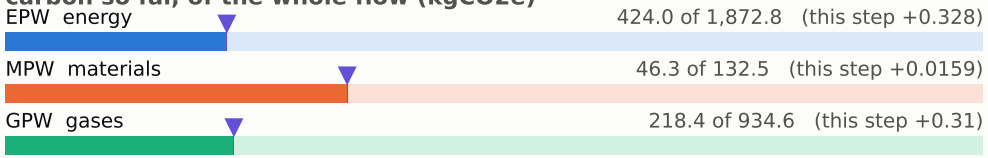

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

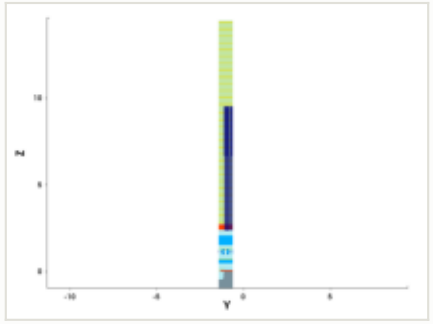

y cut at -1.035 µm

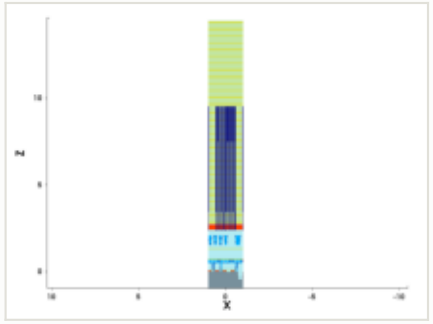

mask for this step

no mask for this step

steps by process area

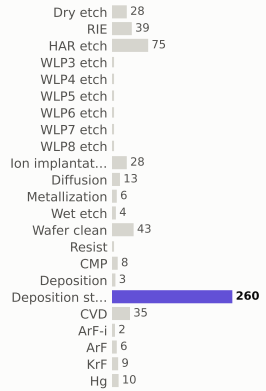

materials deposited (g)

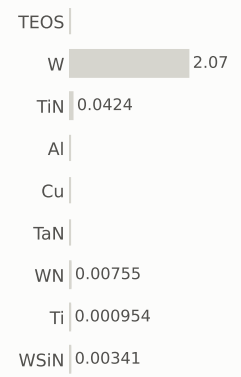

gases emitted (g)

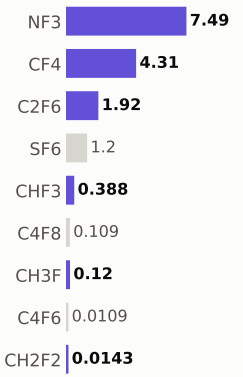

Step #7670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	689.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

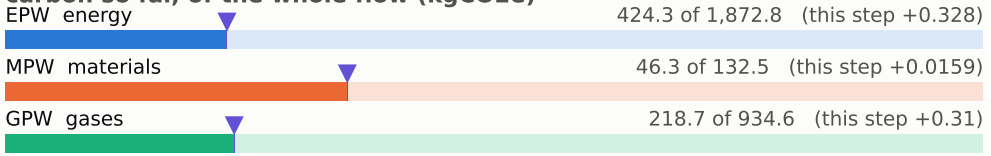

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

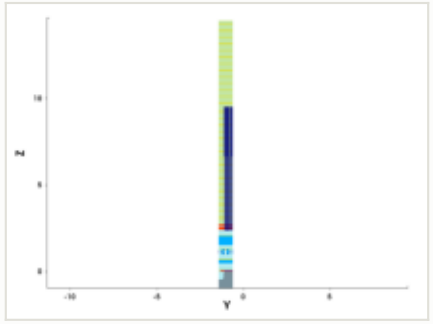

y cut at -1.035 µm

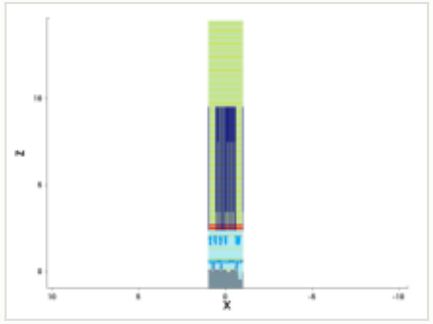

mask for this step

no mask for this step

steps by process area

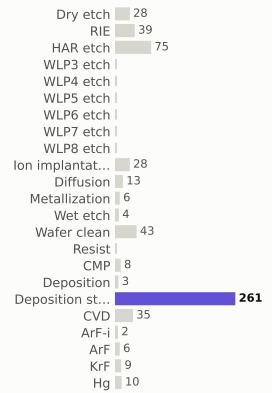

materials deposited (g)

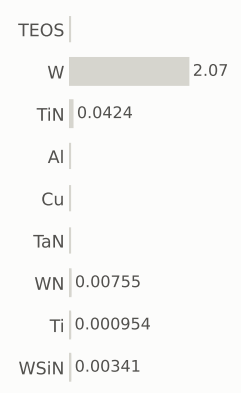

gases emitted (g)

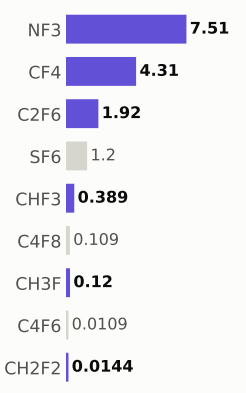

Step #7680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	690.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

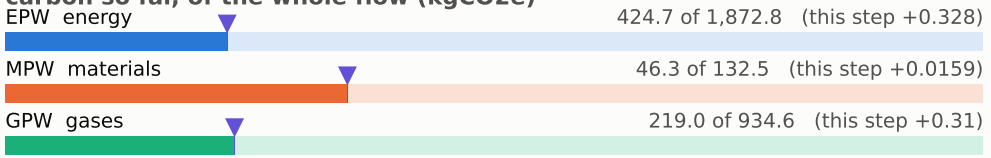

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

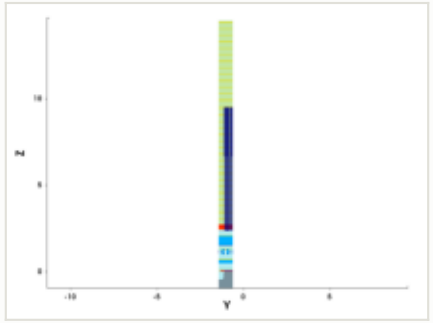

y cut at -1.035 µm

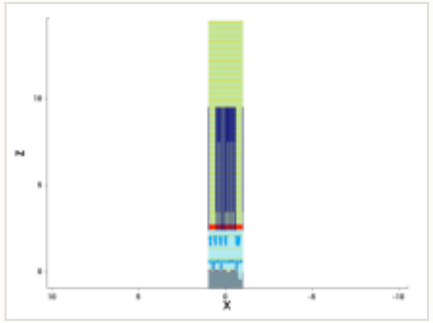

mask for this step

no mask for this step

steps by process area

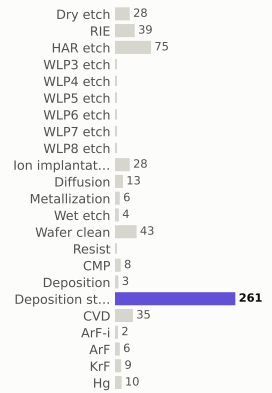

materials deposited (g)

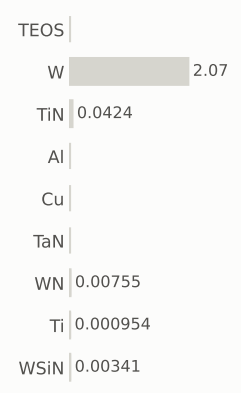

gases emitted (g)

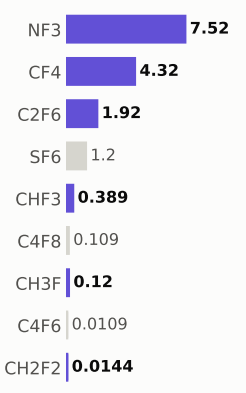

Step #7690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	690.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

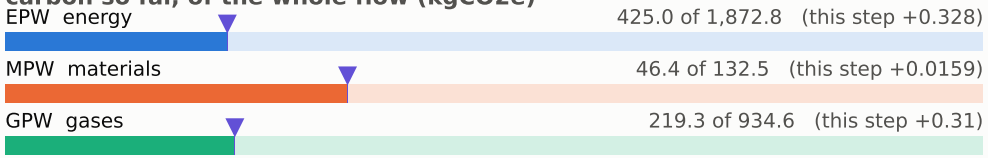

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

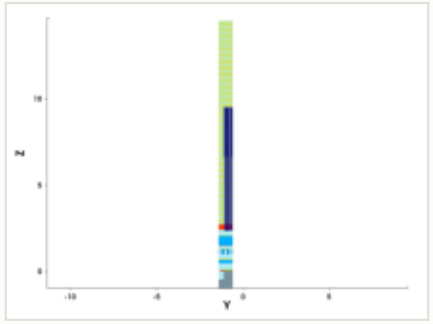

y cut at -1.035 µm

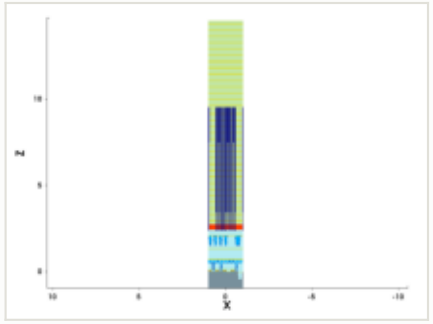

mask for this step

no mask for this step

steps by process area

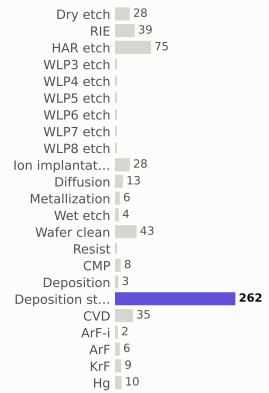

materials deposited (g)

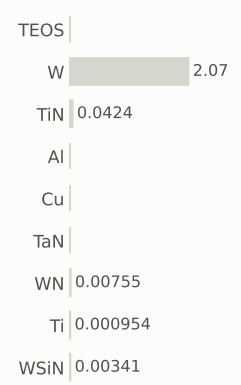

gases emitted (g)

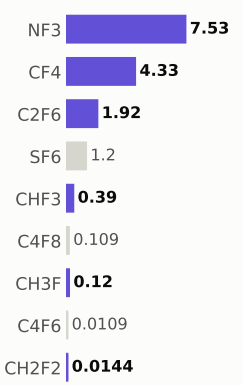

Step #7700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	691.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

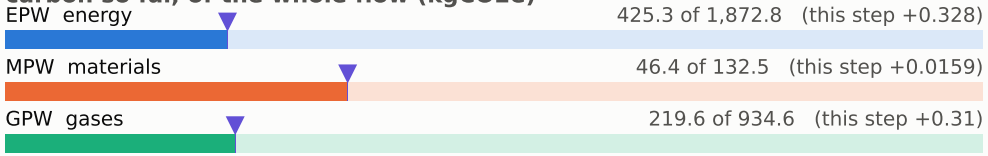

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

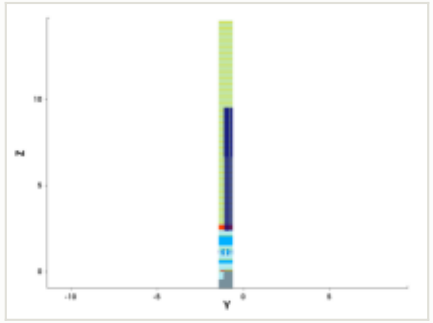

y cut at -1.035 µm

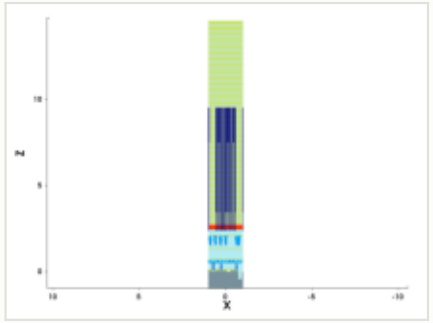

mask for this step

no mask for this step

steps by process area

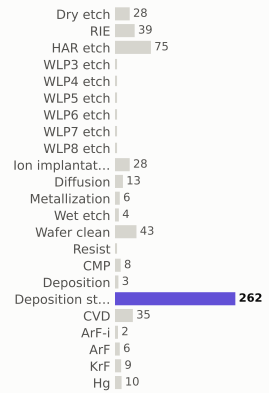

materials deposited (g)

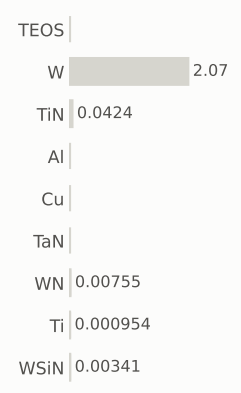

gases emitted (g)

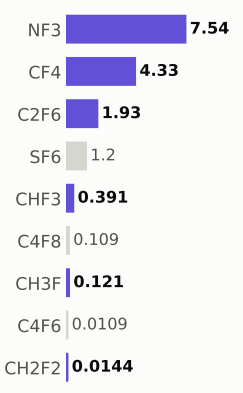

Step #7710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	692.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

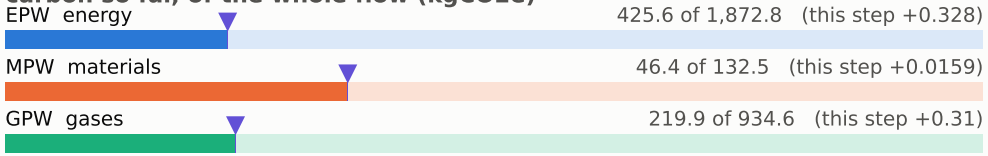

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

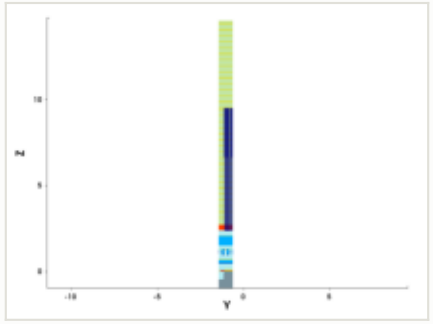

y cut at -1.035 µm

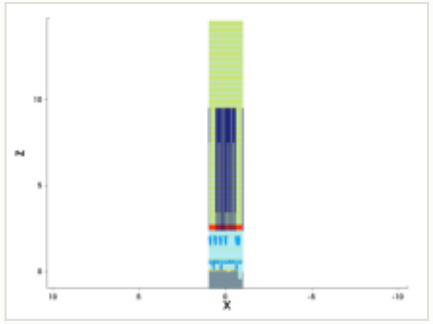

mask for this step

no mask for this step

steps by process area

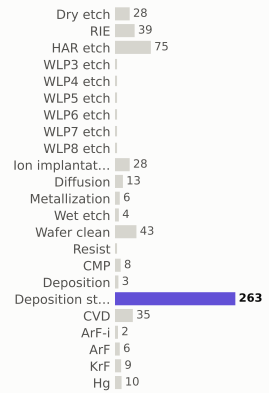

materials deposited (g)

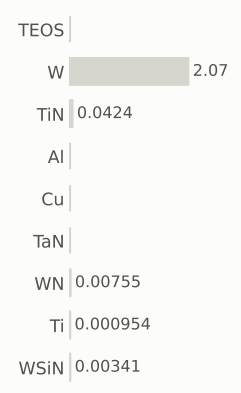

gases emitted (g)

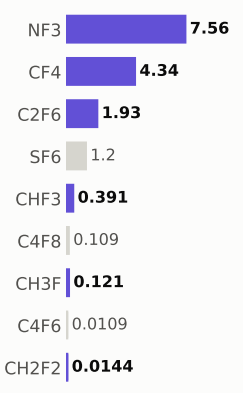

Step #7720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	692.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

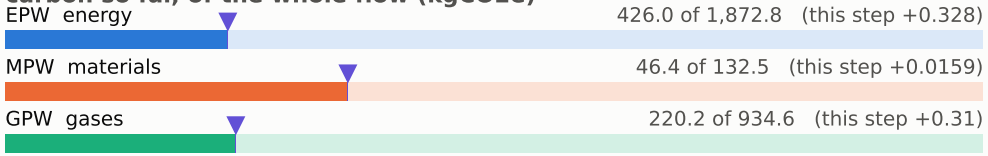

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

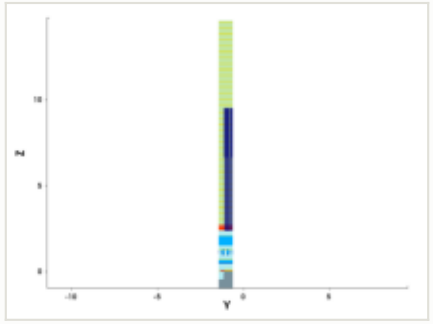

y cut at -1.035 µm

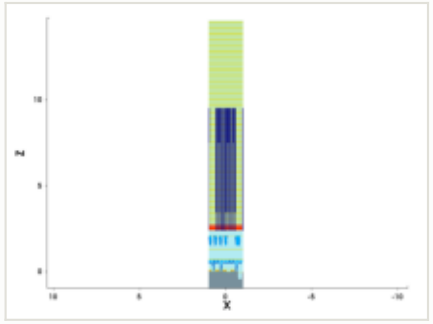

mask for this step

no mask for this step

steps by process area

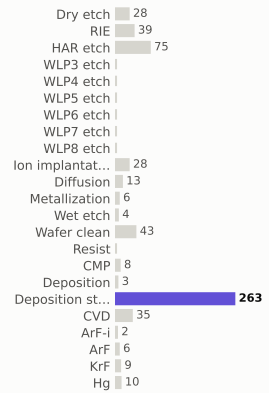

materials deposited (g)

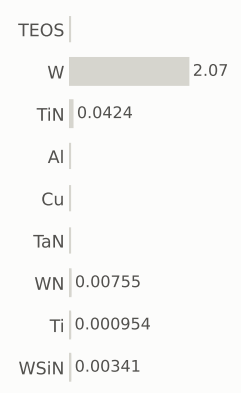

gases emitted (g)

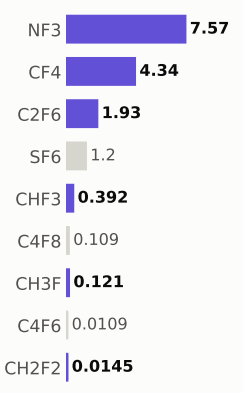

Step #7730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	693.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

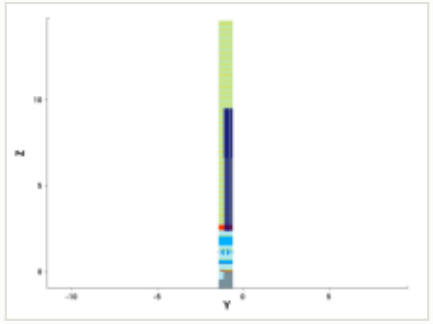

y cut at -1.035 µm

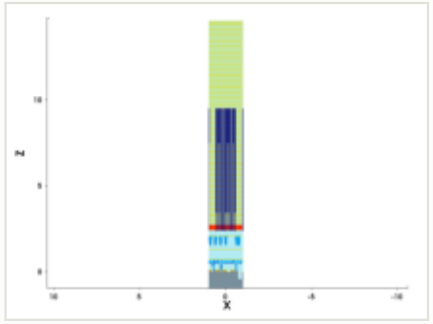

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

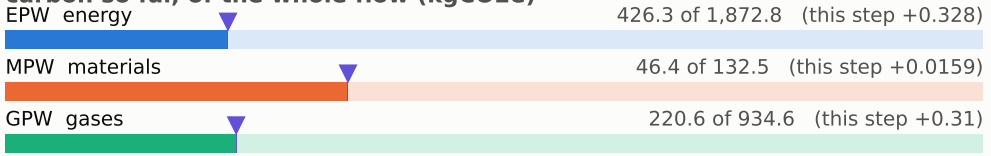

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

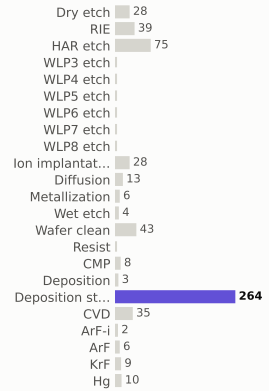

materials deposited (g)

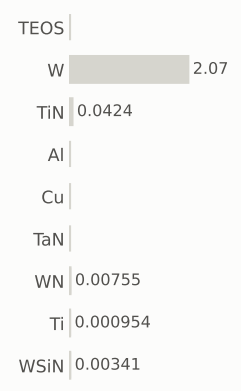

gases emitted (g)

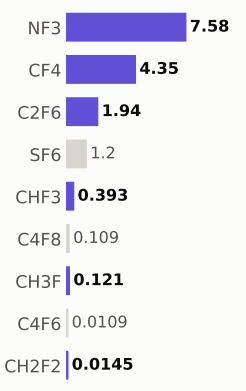

Step #7740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	693.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

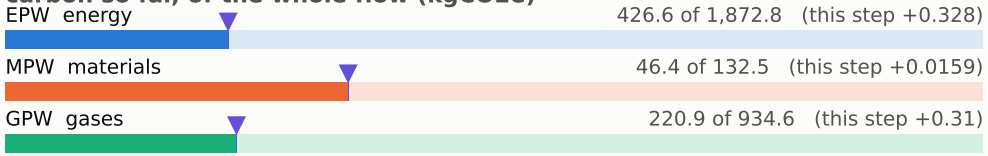

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

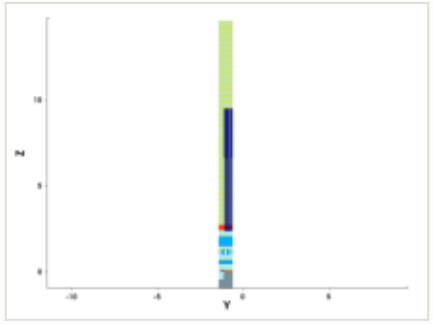

y cut at -1.035 µm

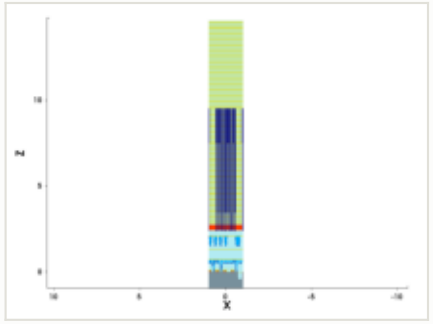

mask for this step

no mask for this step

steps by process area

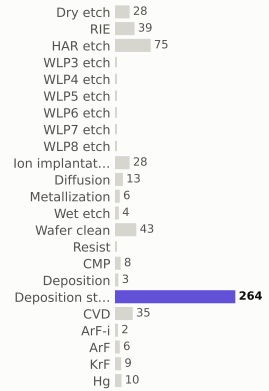

materials deposited (g)

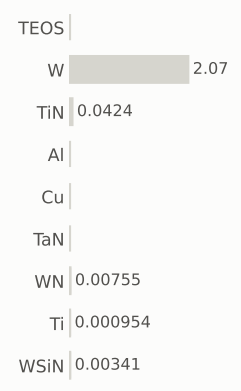

gases emitted (g)

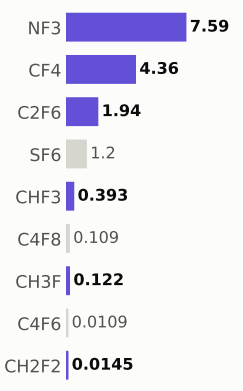

Step #7750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	694.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 427.0 of 1,872.8 (this step +0.328)

MPW materials — 46.5 of 132.5 (this step +0.0159)

GPW gases — 221.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

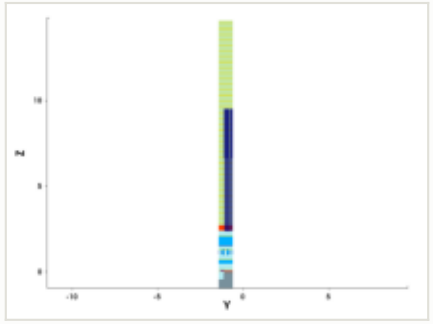

y cut at -1.035 µm

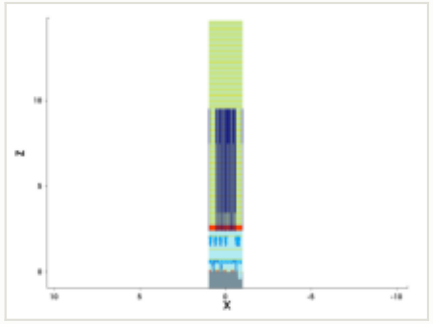

mask for this step

no mask for this step

steps by process area

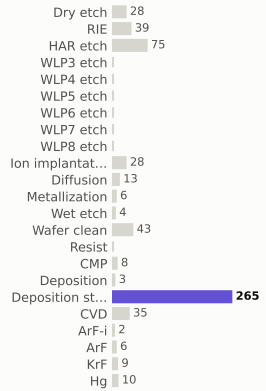

materials deposited (g)

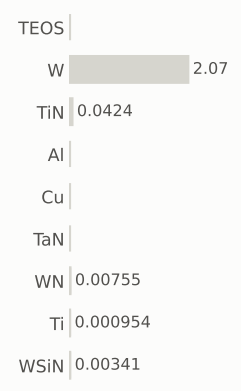

gases emitted (g)

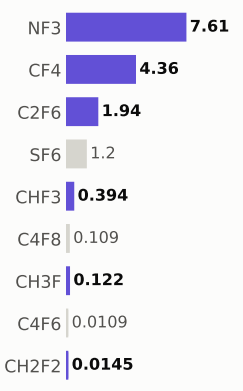

Step #7760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	695.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

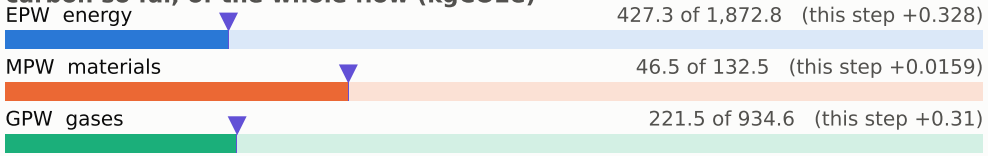

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

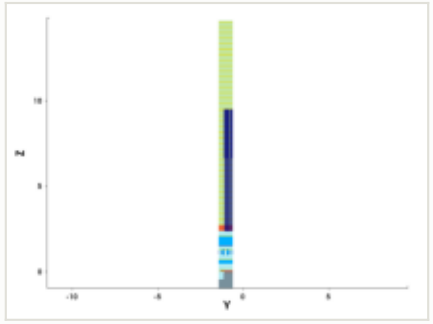

y cut at -1.035 µm

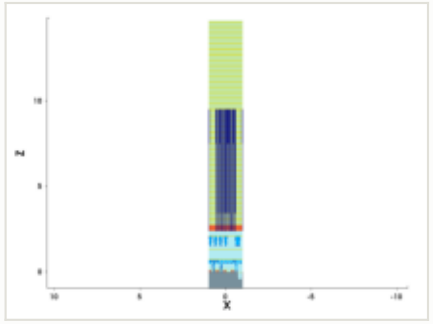

mask for this step

no mask for this step

steps by process area

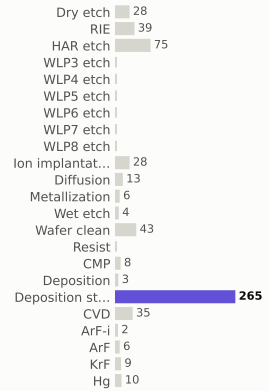

materials deposited (g)

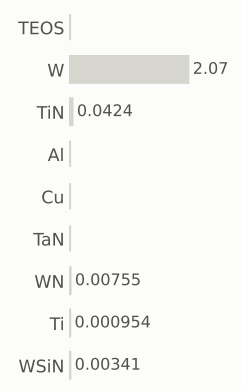

gases emitted (g)

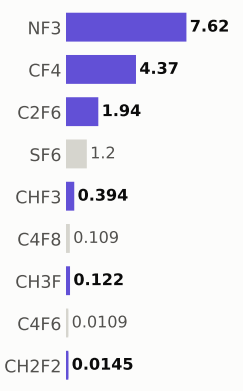

Step #7770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	695.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

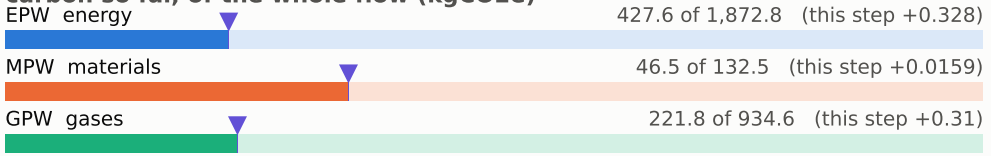

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

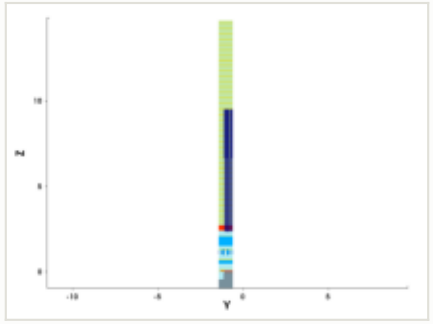

y cut at -1.035 µm

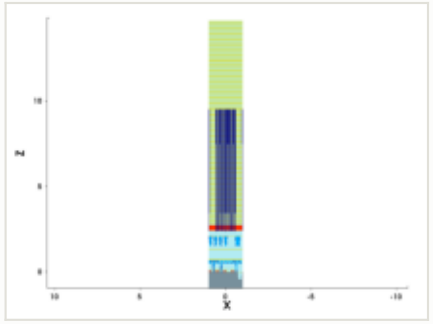

mask for this step

no mask for this step

steps by process area

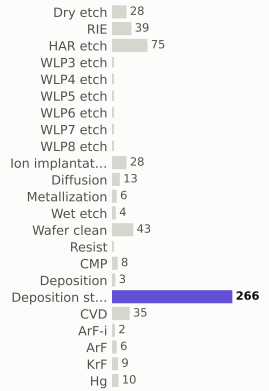

materials deposited (g)

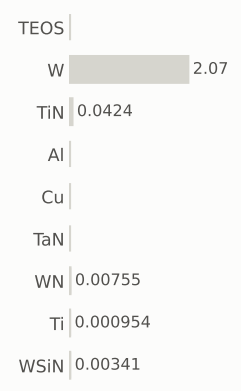

gases emitted (g)

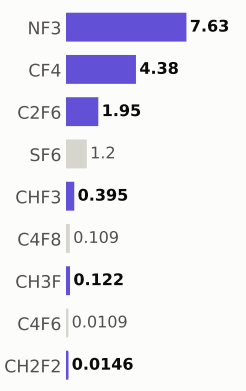

Step #7780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	696.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

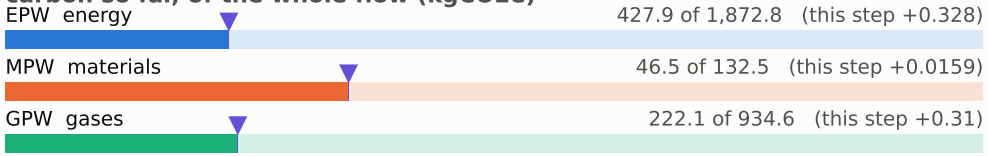

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

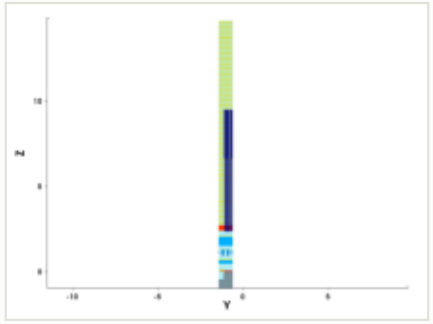

y cut at -1.035 µm

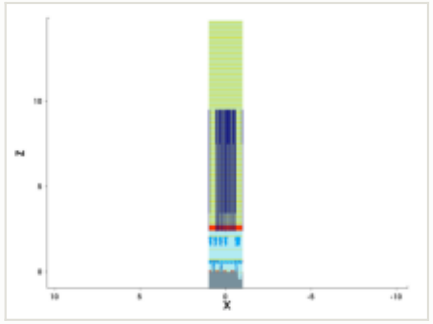

mask for this step

no mask for this step

steps by process area

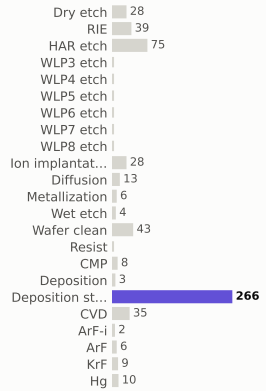

materials deposited (g)

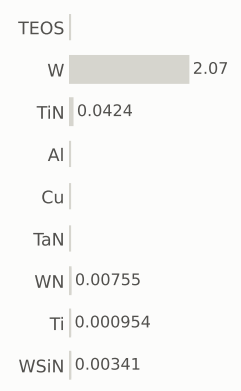

gases emitted (g)

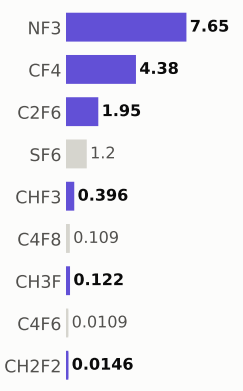

Step #7790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	697.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

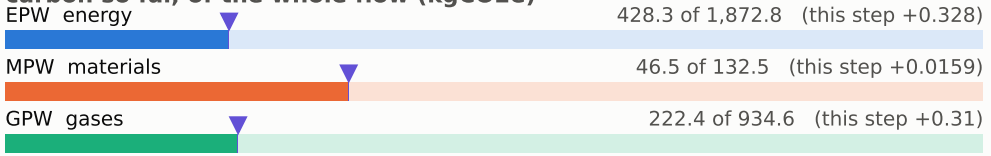

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

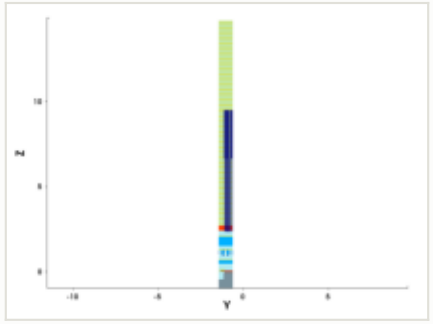

y cut at -1.035 µm

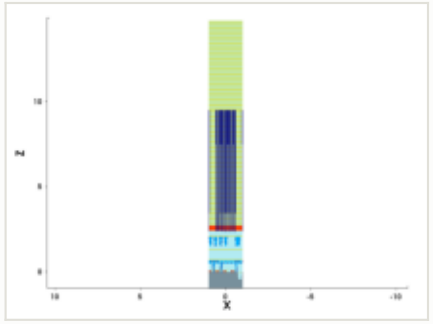

mask for this step

no mask for this step

steps by process area

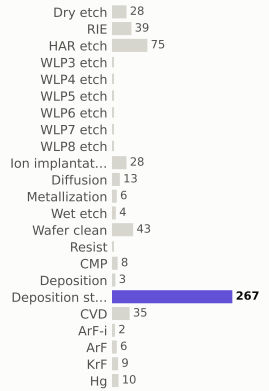

materials deposited (g)

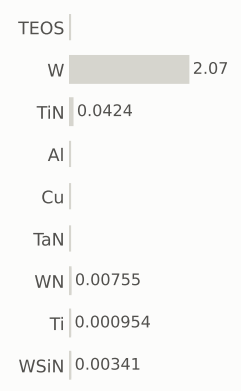

gases emitted (g)

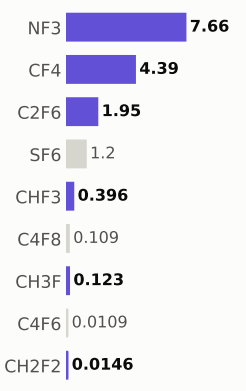

Step #7800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	697.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

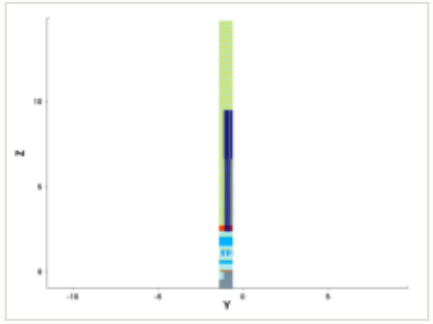

y cut at -1.035 µm

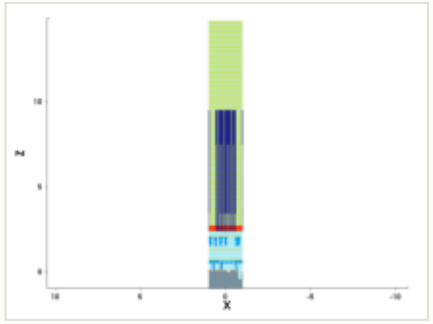

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

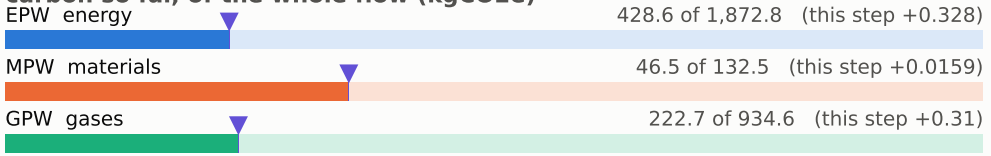

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

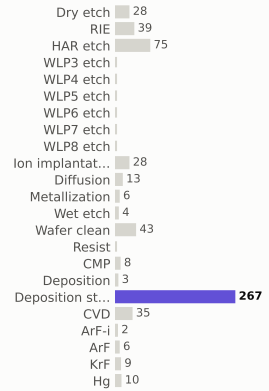

materials deposited (g)

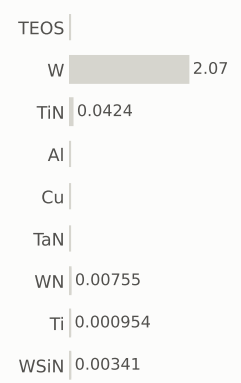

gases emitted (g)

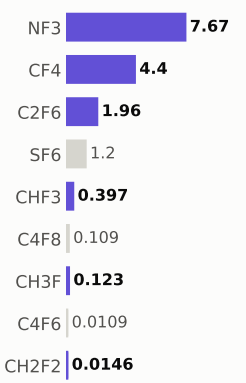

Step #7810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	698.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

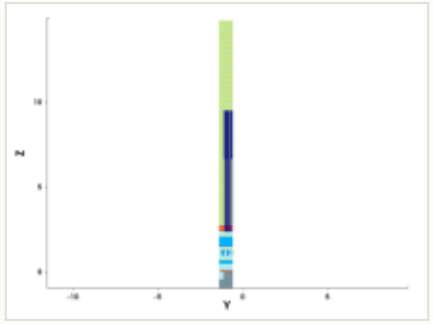

y cut at -1.035 µm

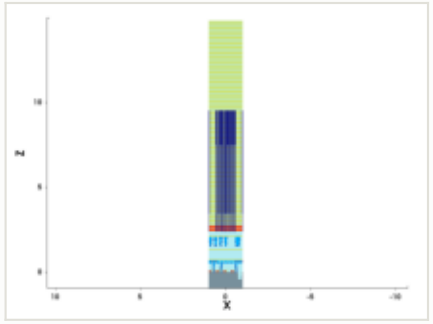

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

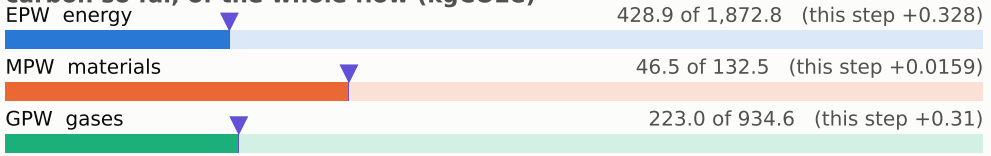

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

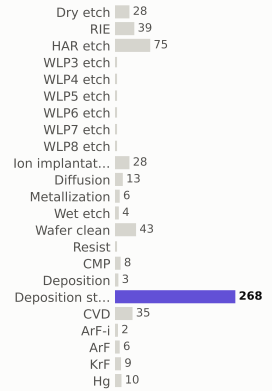

materials deposited (g)

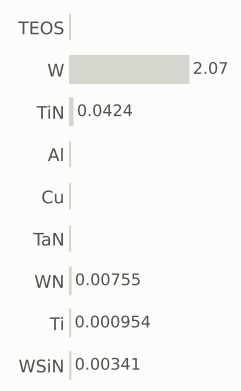

gases emitted (g)

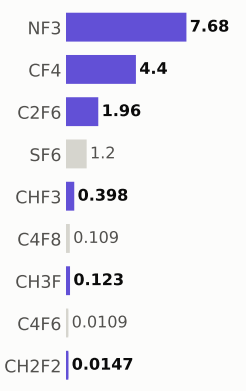

Step #7820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	699.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

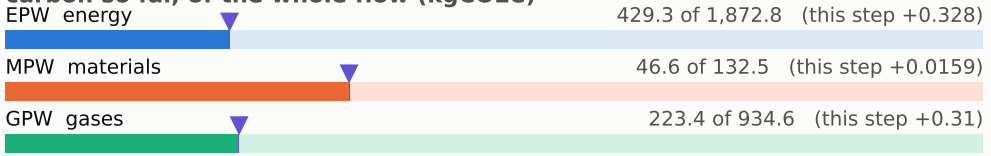

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

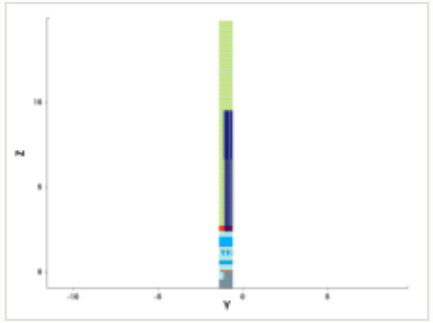

y cut at -1.035 µm

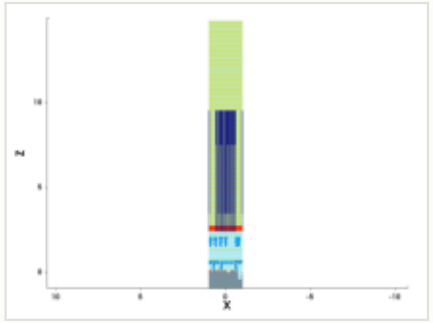

mask for this step

no mask for this step

steps by process area

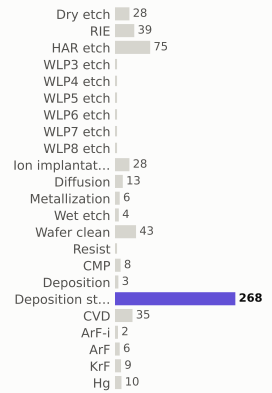

materials deposited (g)

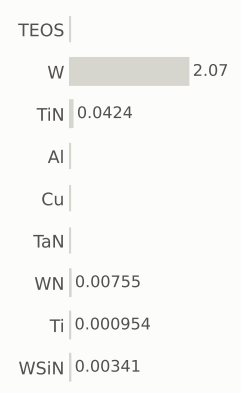

gases emitted (g)

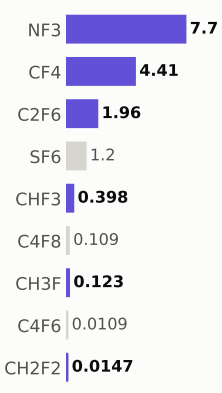

Step #7830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	699.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

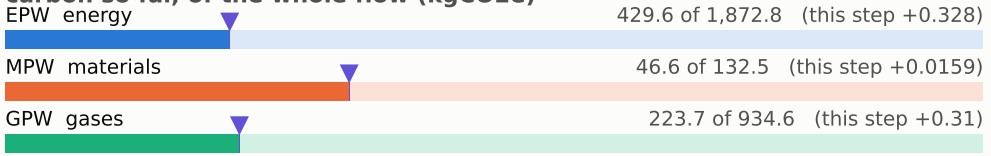

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

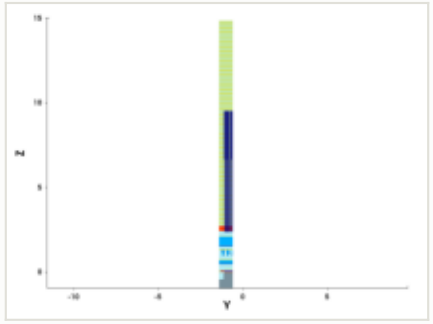

y cut at -1.035 µm

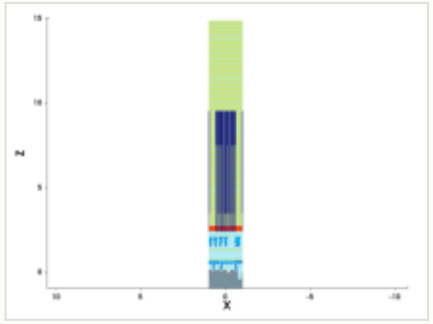

mask for this step

no mask for this step

steps by process area

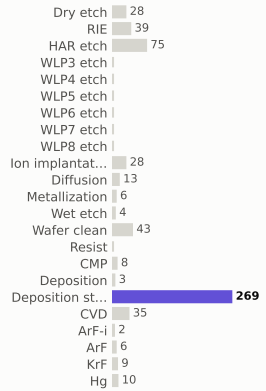

materials deposited (g)

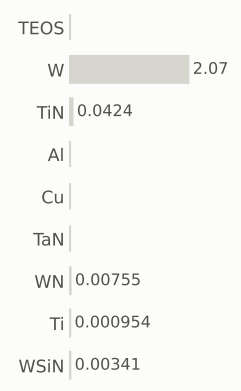

gases emitted (g)

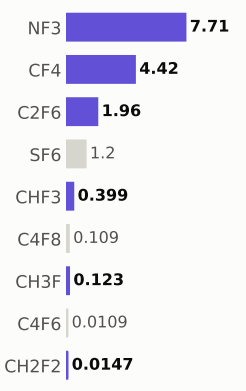

Step #7840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	700.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

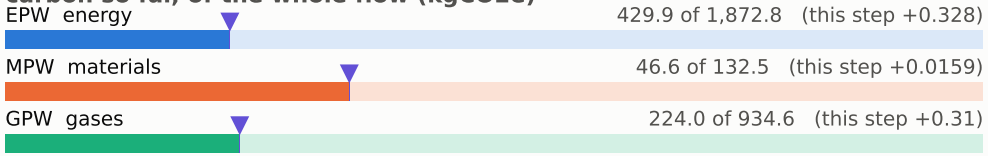

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

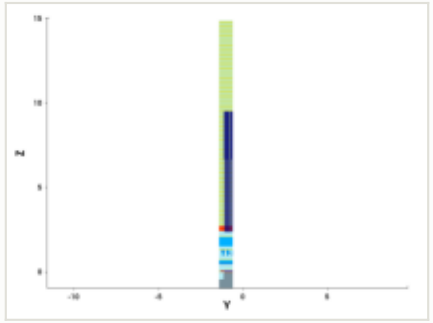

y cut at -1.035 µm

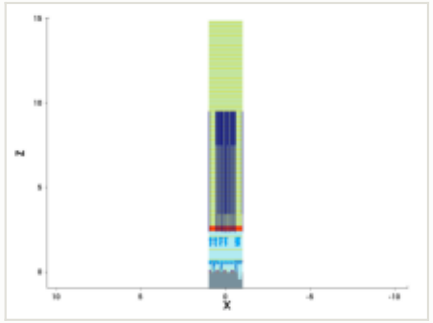

mask for this step

no mask for this step

steps by process area

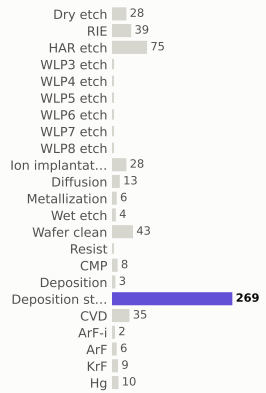

materials deposited (g)

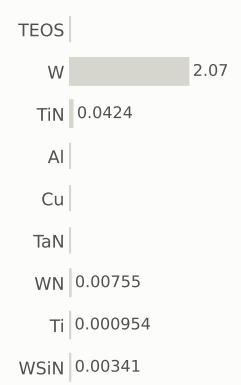

gases emitted (g)

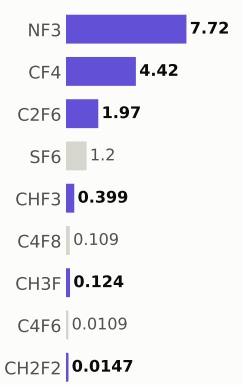

Step #7850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	701.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 430.2 of 1,872.8 (this step +0.328)

MPW materials — 46.6 of 132.5 (this step +0.0159)

GPW gases — 224.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

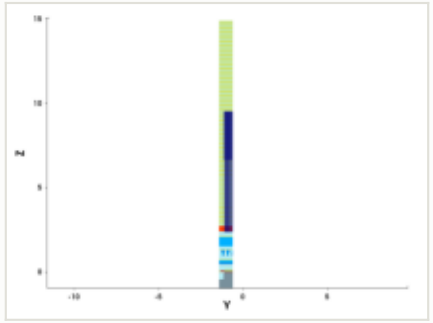

y cut at -1.035 µm

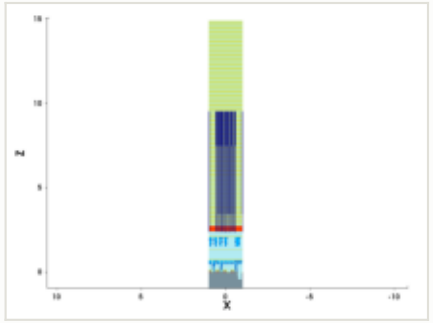

mask for this step

no mask for this step

steps by process area

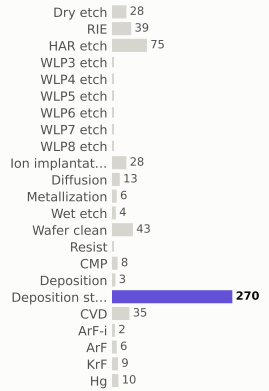

materials deposited (g)

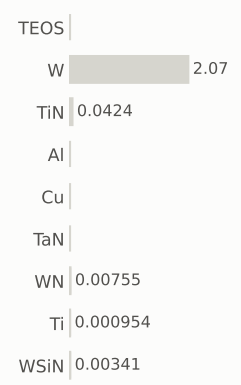

gases emitted (g)

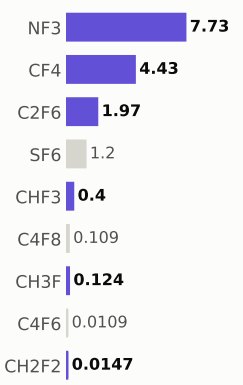

Step #7860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	701.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

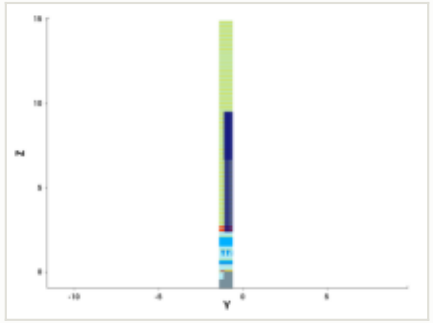

y cut at -1.035 µm

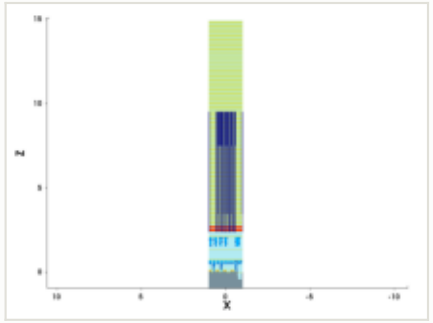

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

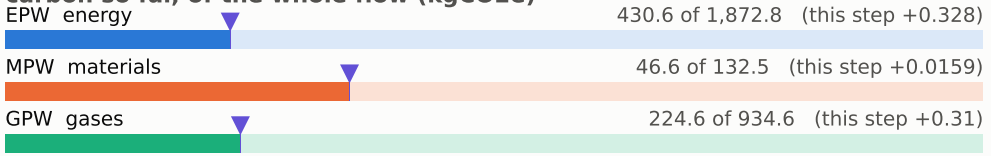

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

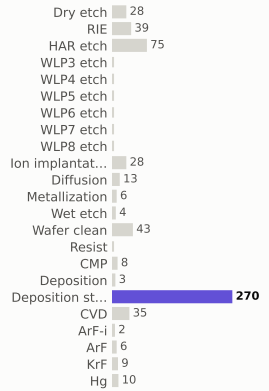

materials deposited (g)

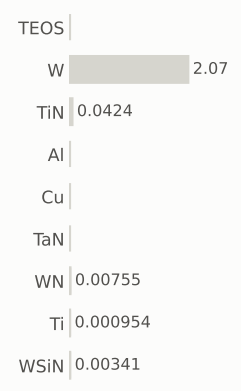

gases emitted (g)

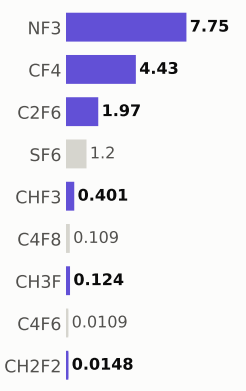

Step #7870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	702.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

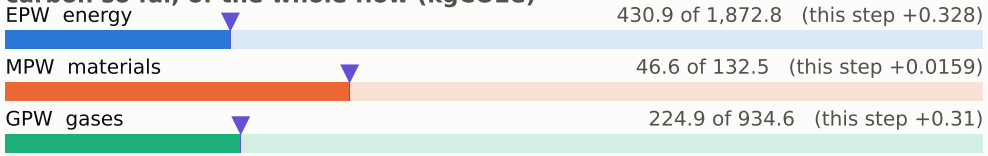

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

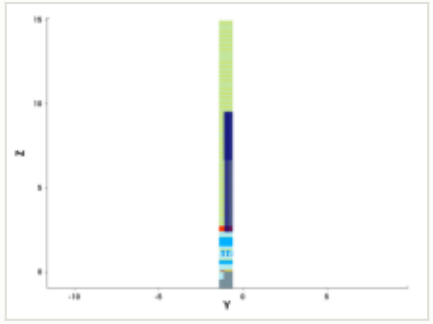

y cut at -1.035 µm

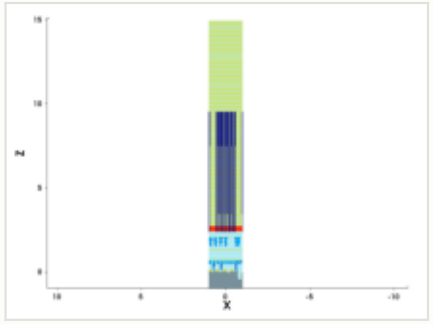

mask for this step

no mask for this step

steps by process area

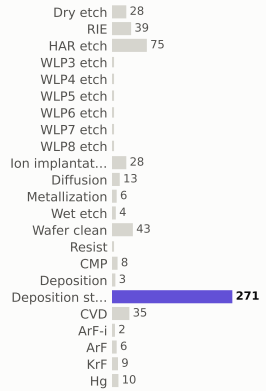

materials deposited (g)

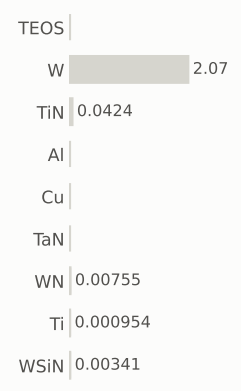

gases emitted (g)

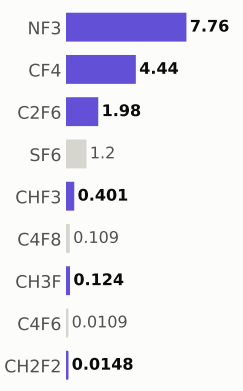

Step #7880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	703.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

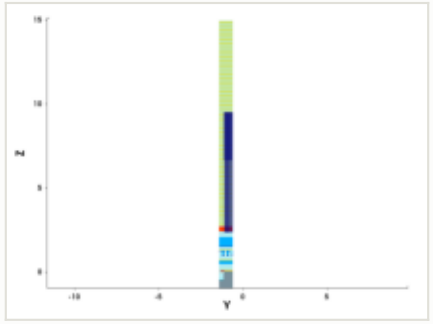

y cut at -1.035 µm

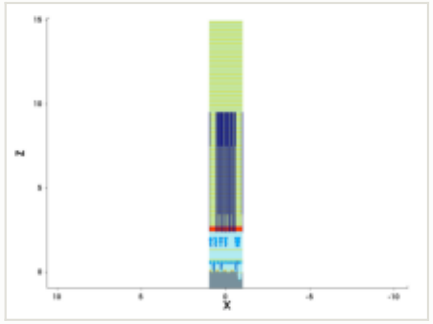

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

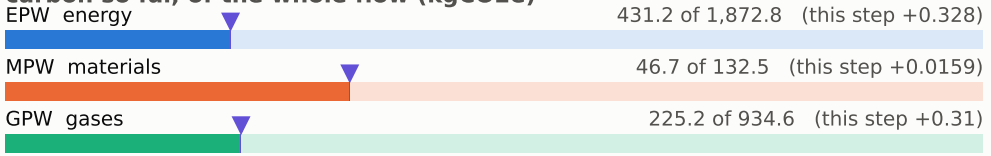

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

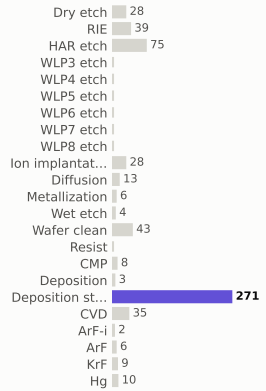

materials deposited (g)

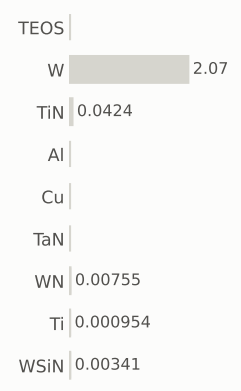

gases emitted (g)

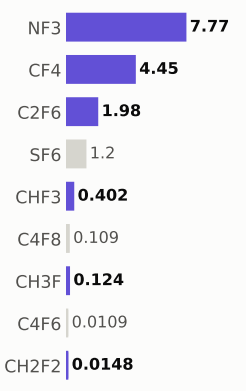

Step #7890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	703.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

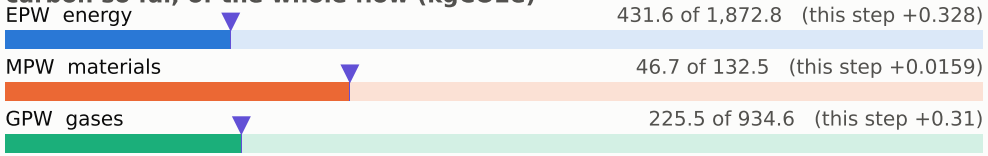

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

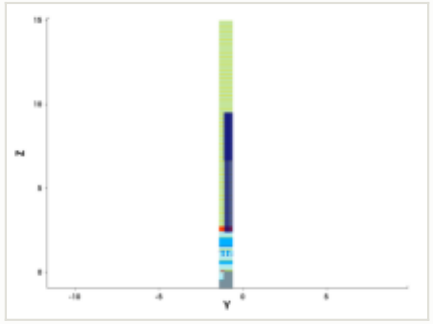

y cut at -1.035 µm

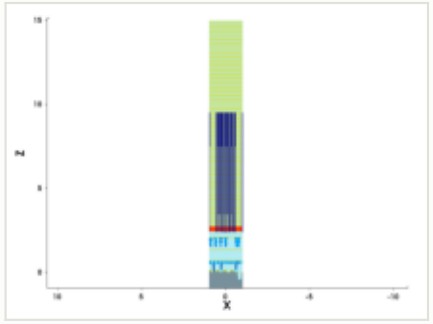

mask for this step

no mask for this step

steps by process area

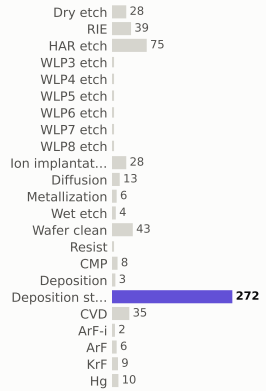

materials deposited (g)

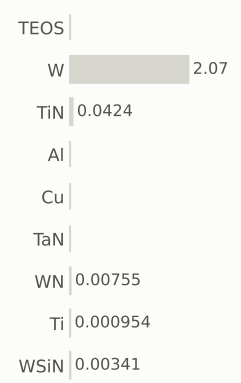

gases emitted (g)

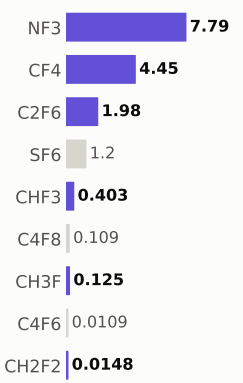

Step #7900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	704.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

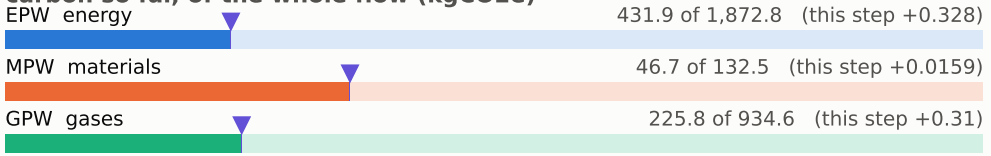

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

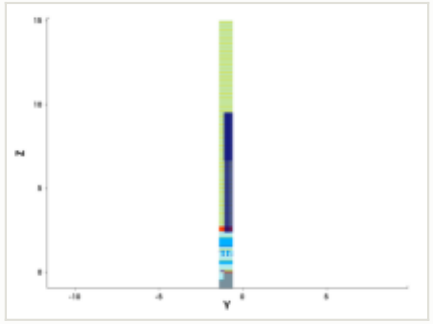

y cut at -1.035 µm

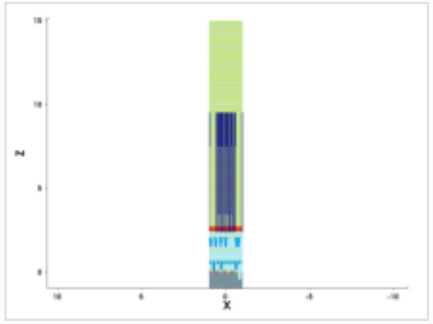

mask for this step

no mask for this step

steps by process area

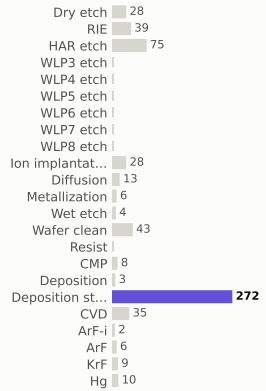

materials deposited (g)

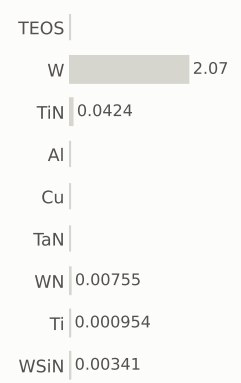

gases emitted (g)

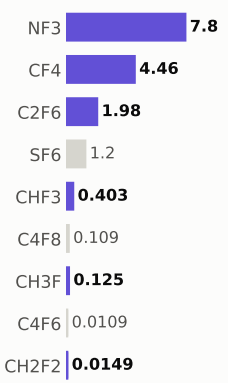

Step #7910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	705.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

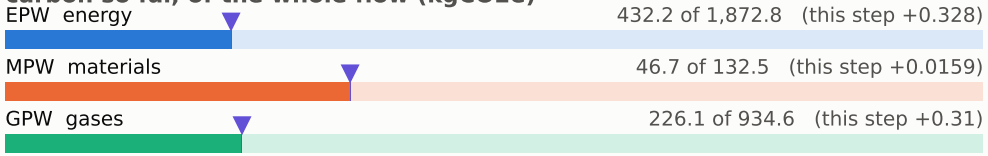

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

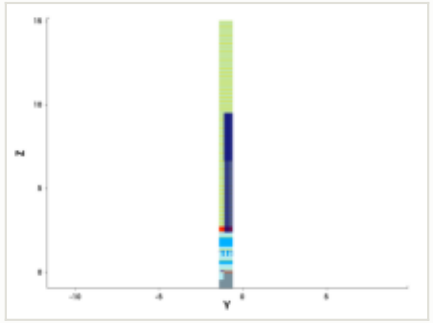

y cut at -1.035 µm

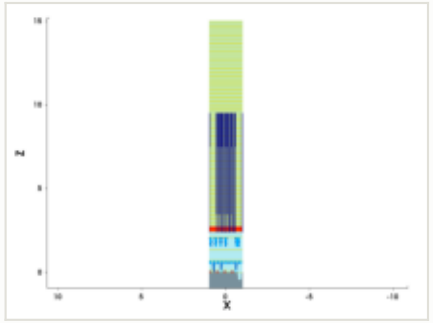

mask for this step

no mask for this step

steps by process area

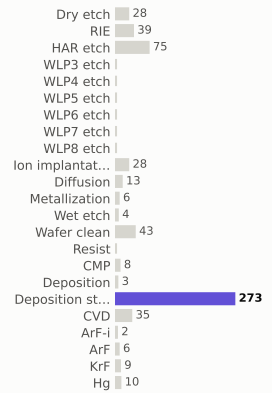

materials deposited (g)

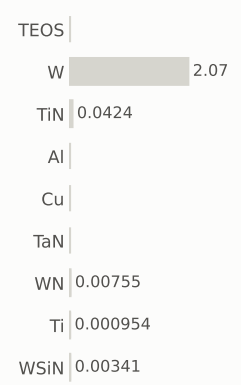

gases emitted (g)

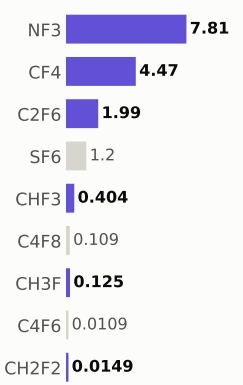

Step #7920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	705.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

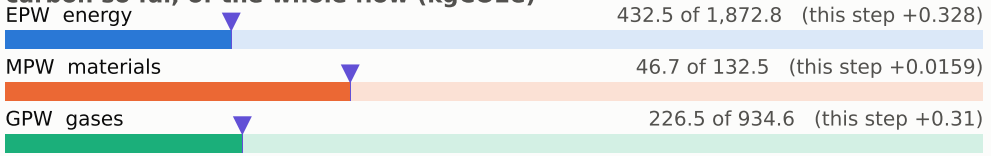

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

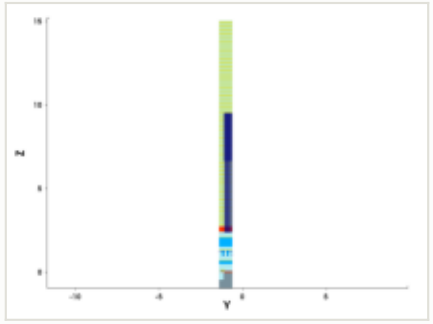

y cut at -1.035 µm

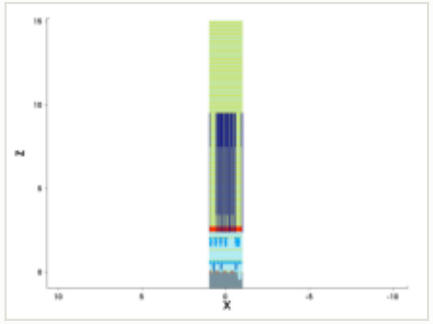

mask for this step

no mask for this step

steps by process area

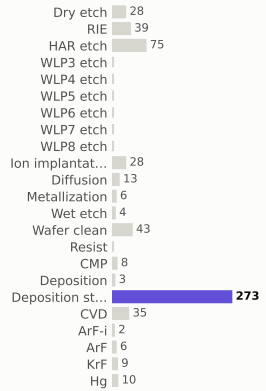

materials deposited (g)

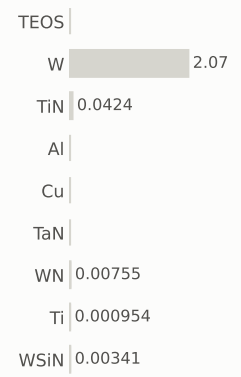

gases emitted (g)

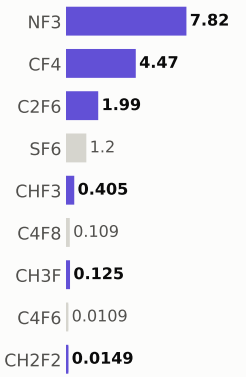

Step #7930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	706.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

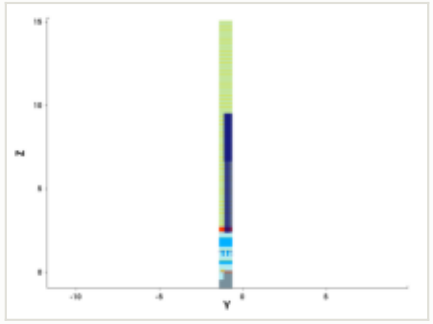

y cut at -1.035 µm

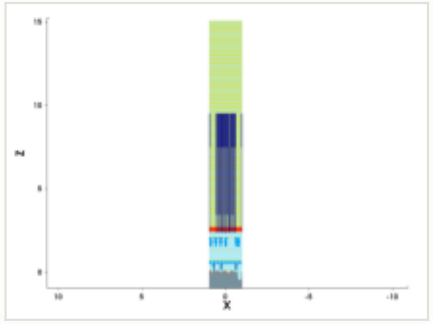

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

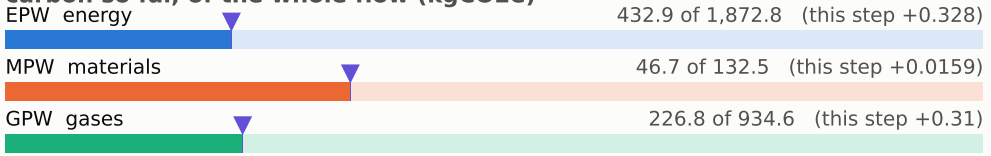

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

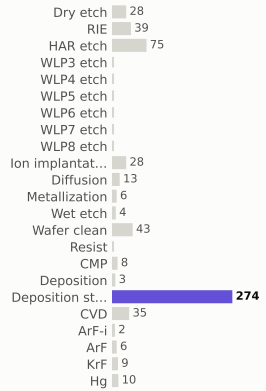

materials deposited (g)

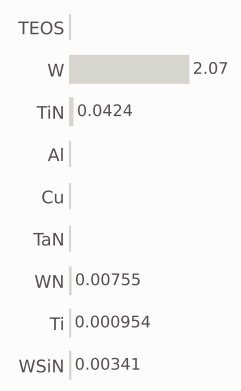

gases emitted (g)

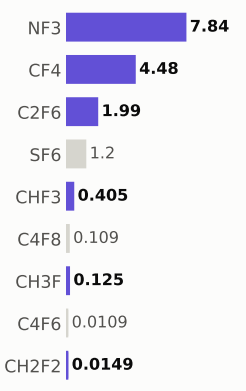

Step #7940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	707.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 433.2 of 1,872.8 (this step +0.328)

MPW materials — 46.8 of 132.5 (this step +0.0159)

GPW gases — 227.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

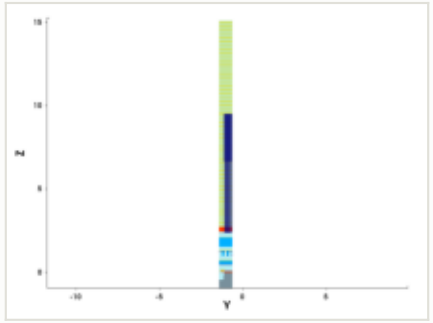

y cut at -1.035 µm

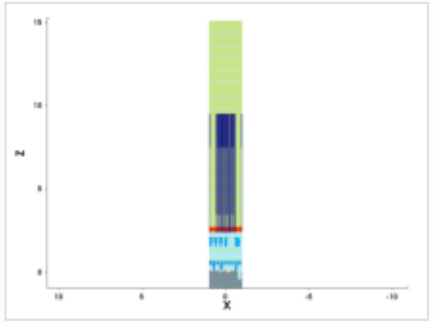

mask for this step

no mask for this step

steps by process area

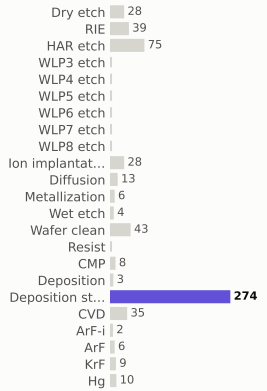

materials deposited (g)

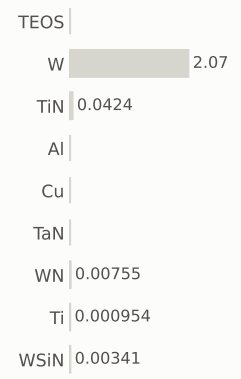

gases emitted (g)

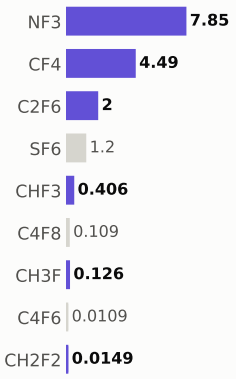

Step #7950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	707.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

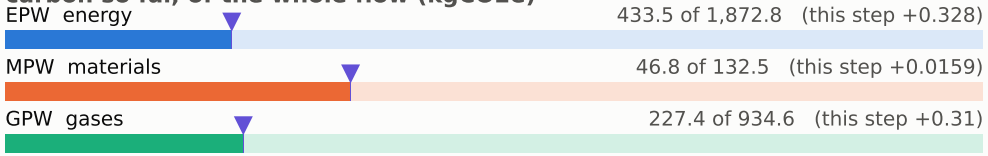

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

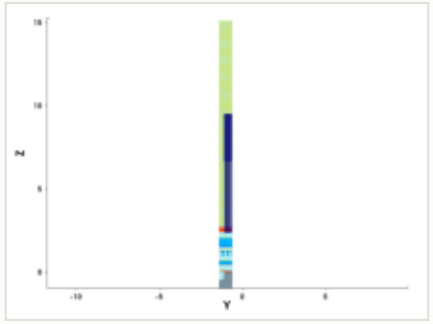

y cut at -1.035 µm

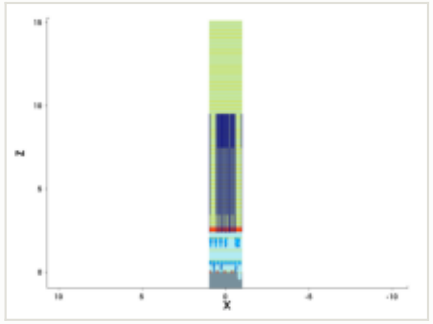

mask for this step

no mask for this step

steps by process area

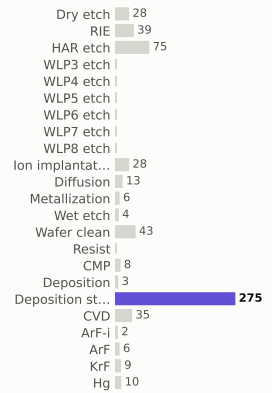

materials deposited (g)

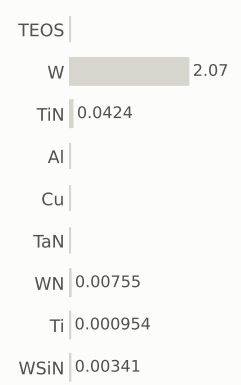

gases emitted (g)

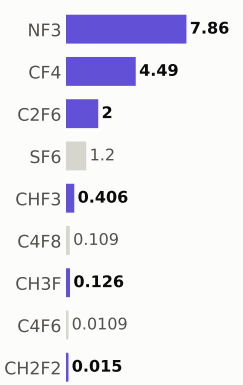

Step #7960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	708.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

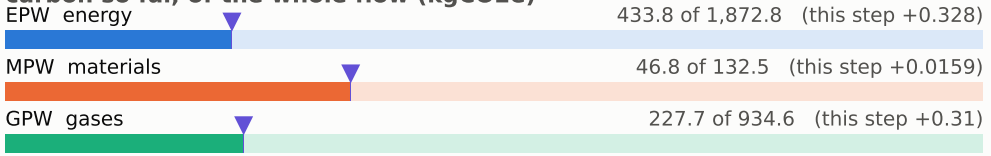

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

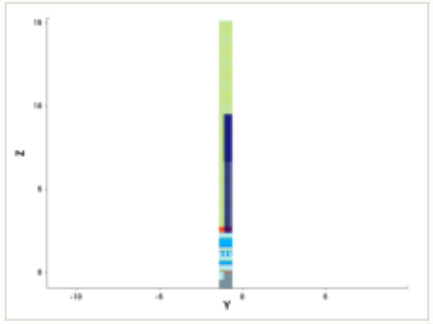

y cut at -1.035 µm

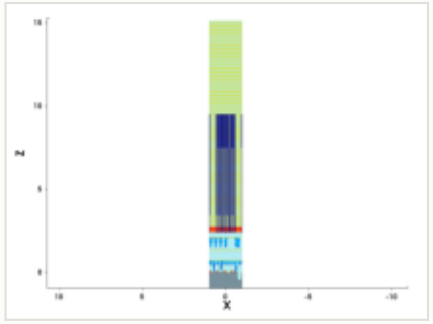

mask for this step

no mask for this step

steps by process area

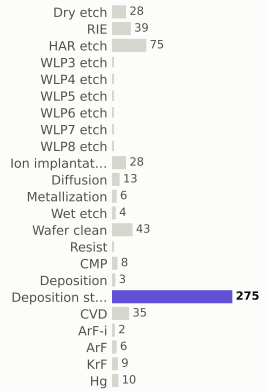

materials deposited (g)

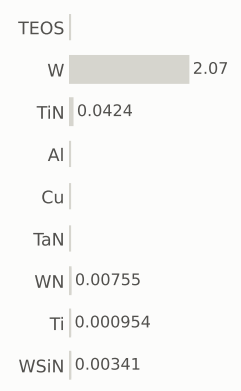

gases emitted (g)

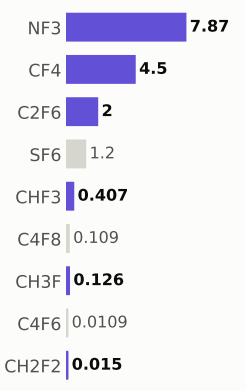

Step #7970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	709.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

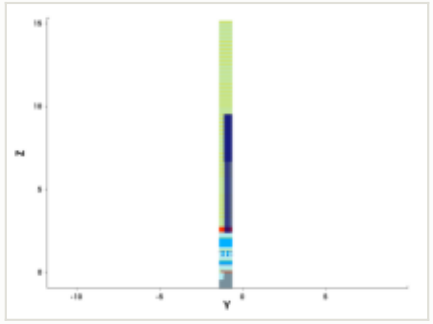

y cut at -1.035 µm

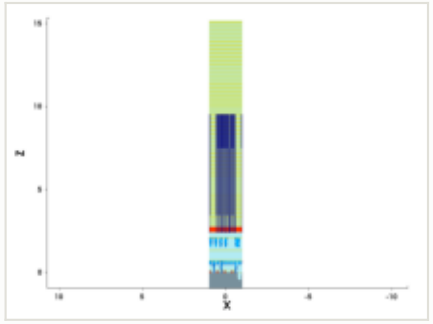

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

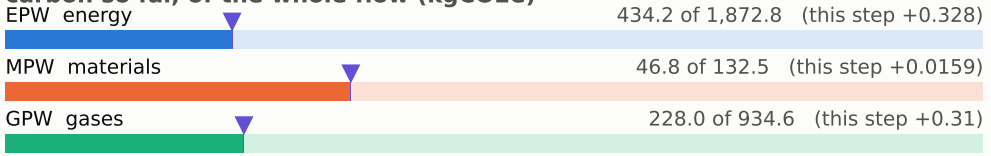

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

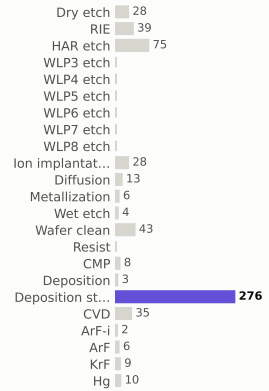

materials deposited (g)

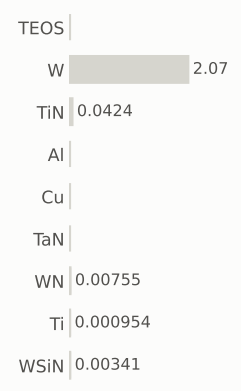

gases emitted (g)

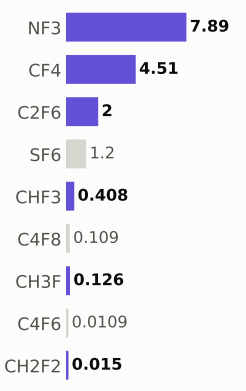

Step #7980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	709.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

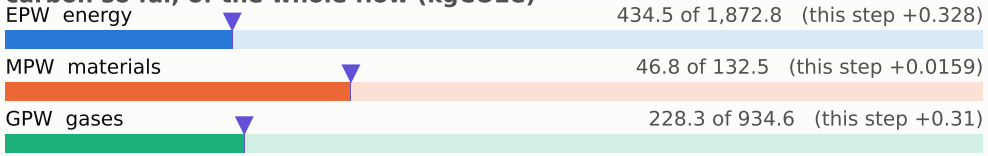

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

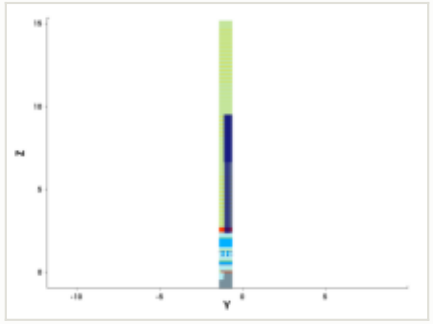

y cut at -1.035 µm

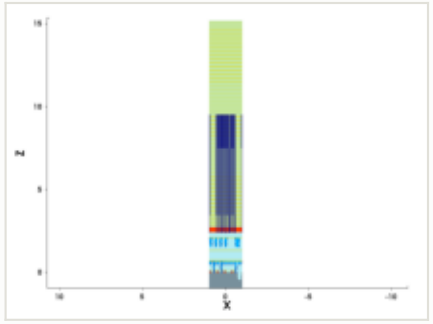

mask for this step

no mask for this step

steps by process area

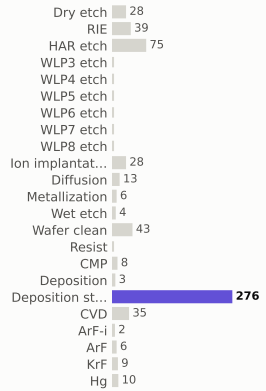

materials deposited (g)

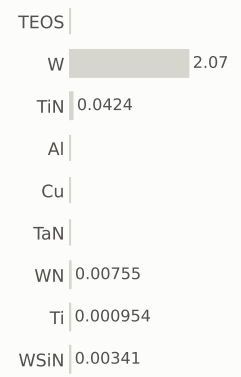

gases emitted (g)



Step #7990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	710.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

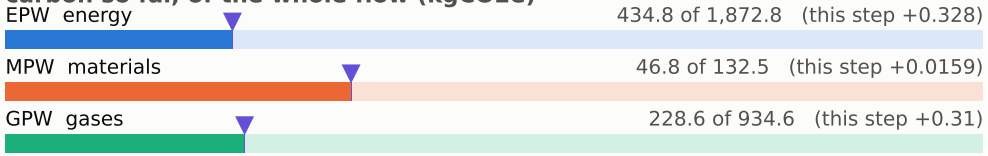

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

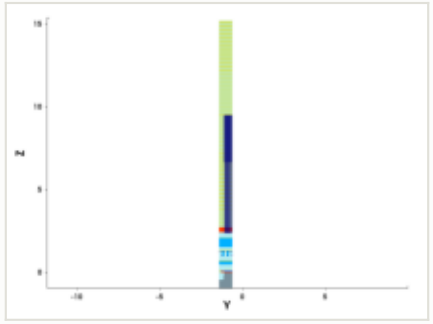

y cut at -1.035 µm

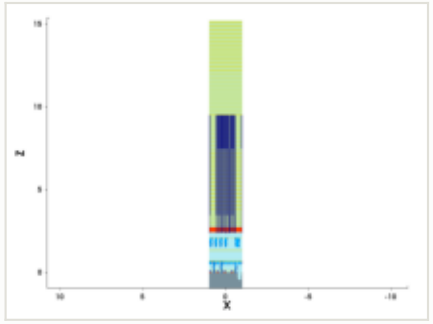

mask for this step

no mask for this step

steps by process area

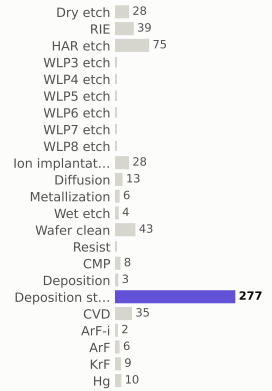

materials deposited (g)

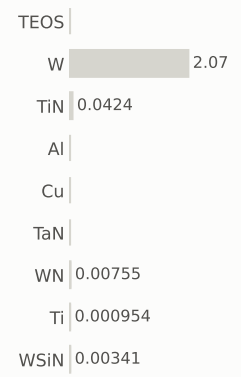

gases emitted (g)

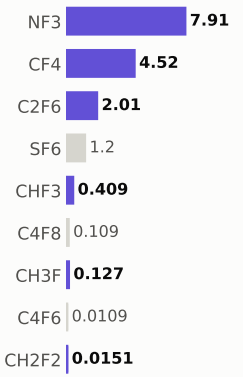

Step #8000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	710.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 435.2 of 1,872.8 (this step +0.328)

MPW materials — 46.9 of 132.5 (this step +0.0159)

GPW gases — 228.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

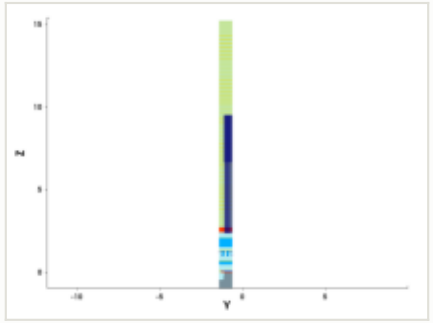

y cut at -1.035 µm

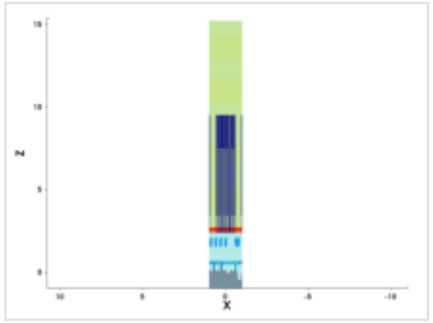

mask for this step

no mask for this step

steps by process area

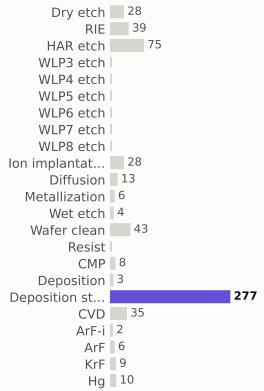

materials deposited (g)

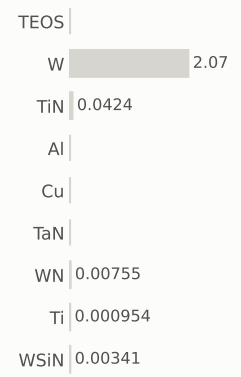

gases emitted (g)

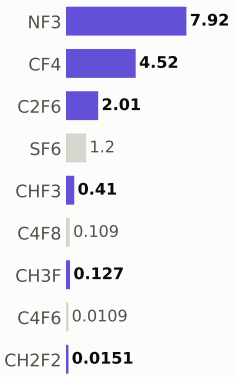

Step #8010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	711.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

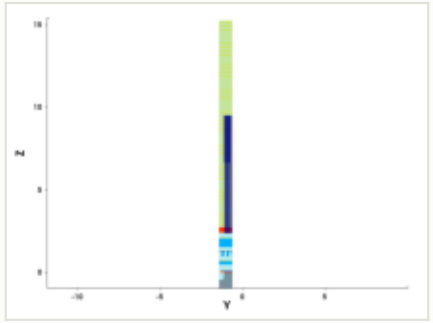

y cut at -1.035 µm

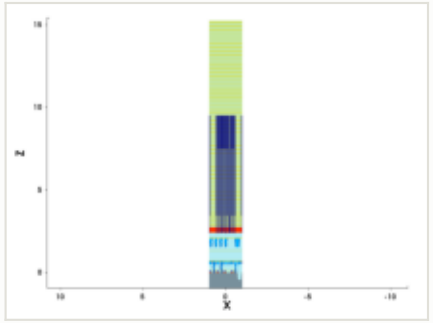

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 435.5 of 1,872.8 (this step +0.328)

MPW materials — 46.9 of 132.5 (this step +0.0159)

GPW gases — 229.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

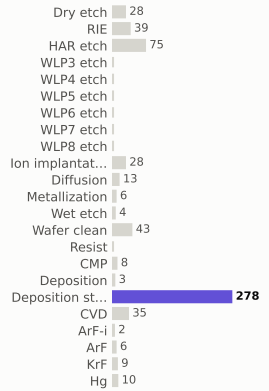

materials deposited (g)

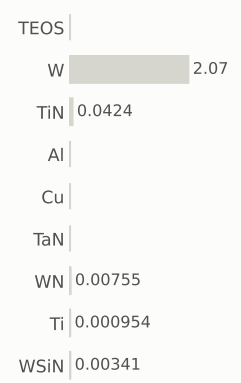

gases emitted (g)

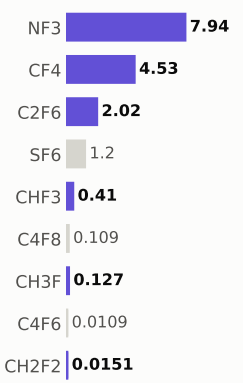

Step #8020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	712.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

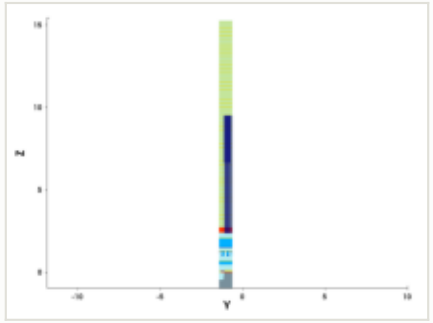

y cut at -1.035 µm

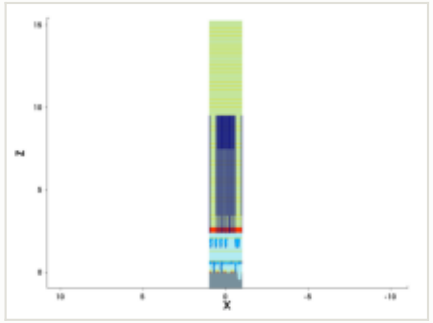

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 435.8 of 1,872.8 (this step +0.328)

MPW materials — 46.9 of 132.5 (this step +0.0159)

GPW gases — 229.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

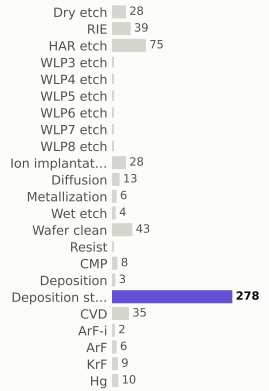

materials deposited (g)

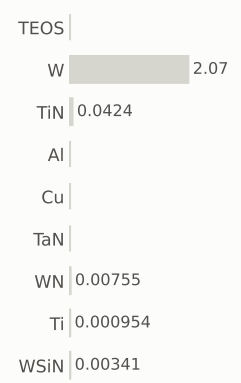

gases emitted (g)

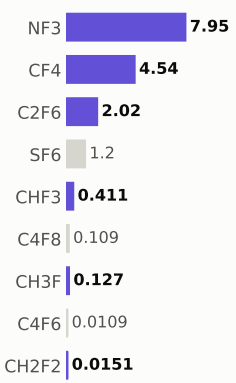

Step #8030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	712.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

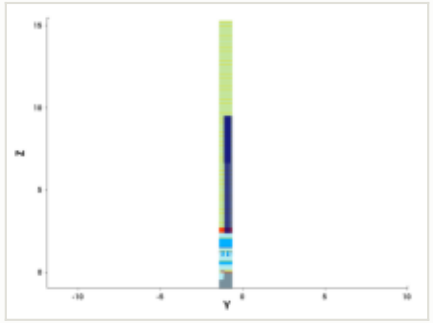

y cut at -1.035 µm

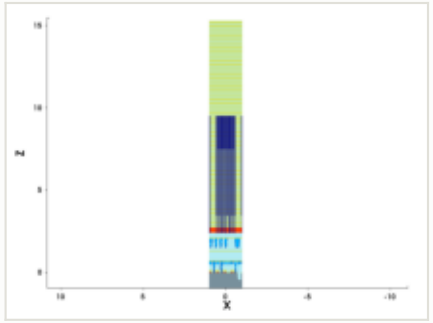

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

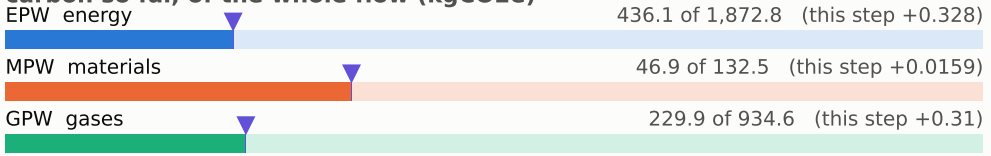

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

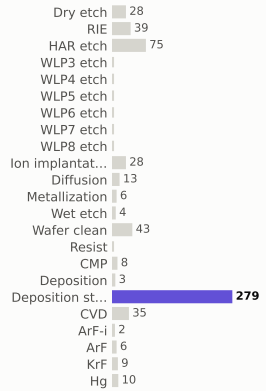

materials deposited (g)

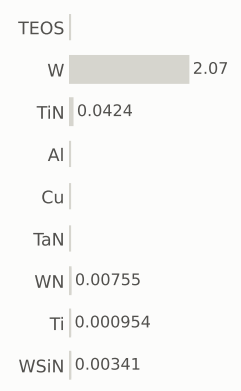

gases emitted (g)

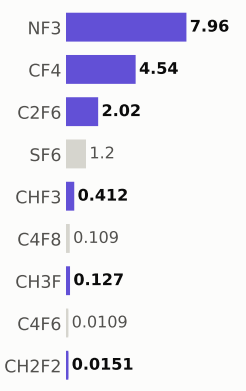

Step #8040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	713.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

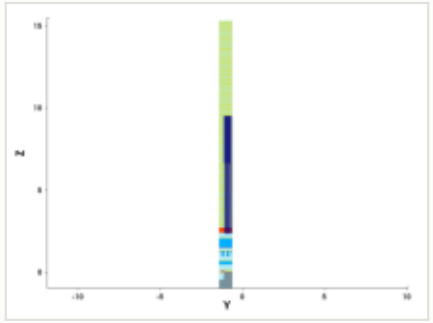

y cut at -1.035 µm

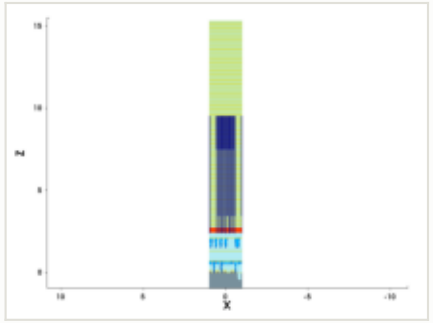

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

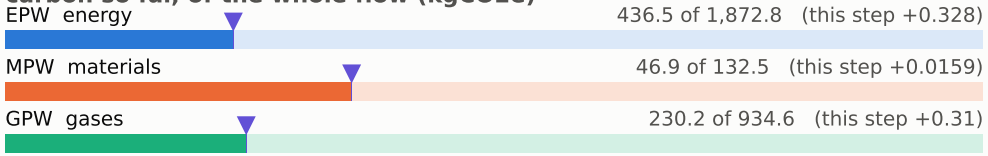

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

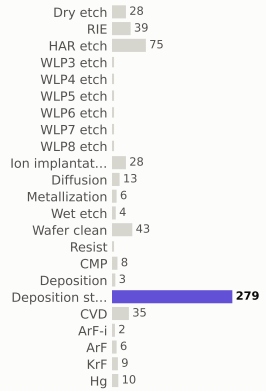

materials deposited (g)

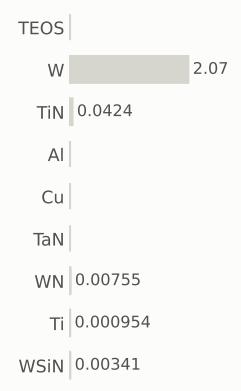

gases emitted (g)

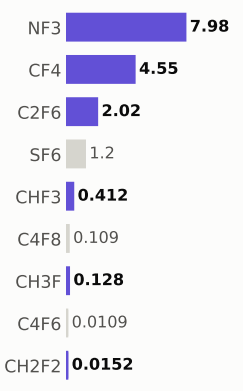

Step #8050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	714.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

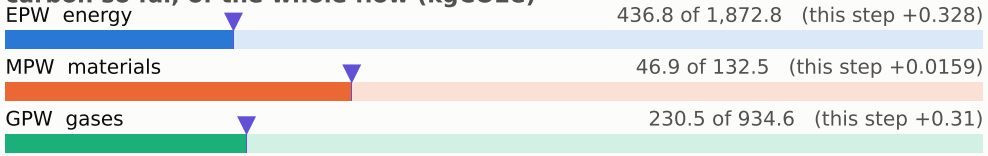

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

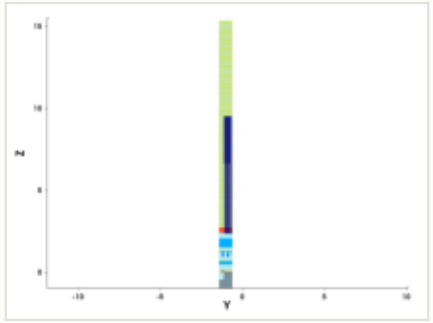

y cut at -1.035 µm

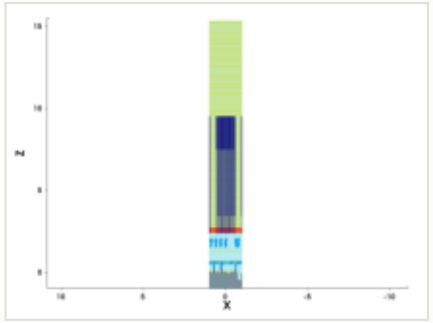

mask for this step

no mask for this step

steps by process area

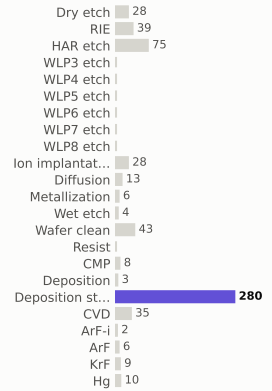

materials deposited (g)

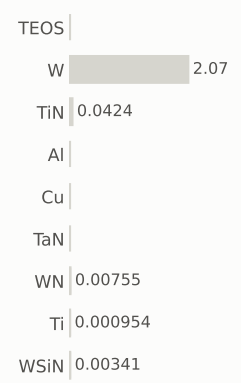

gases emitted (g)

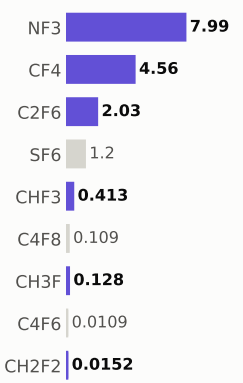

Step #8060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	714.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

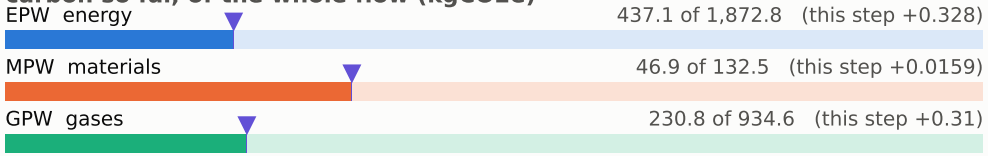

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

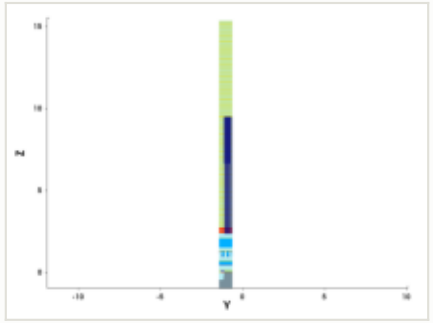

y cut at -1.035 µm

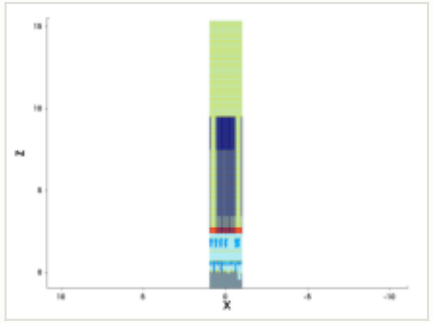

mask for this step

no mask for this step

steps by process area

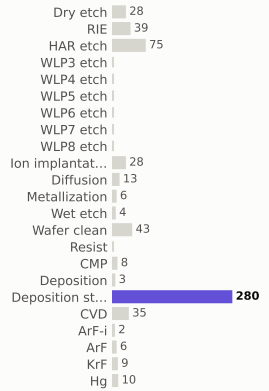

materials deposited (g)

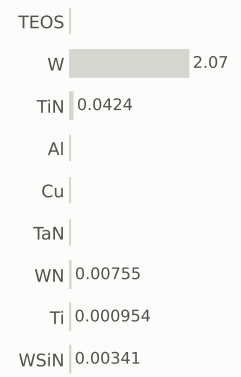

gases emitted (g)



Step #8070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	715.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

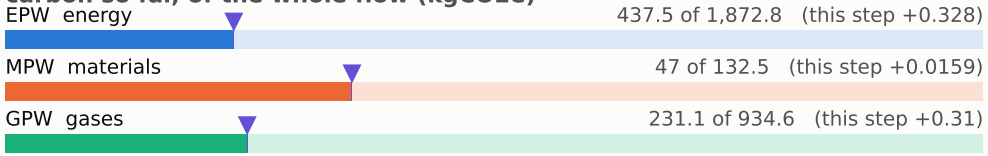

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

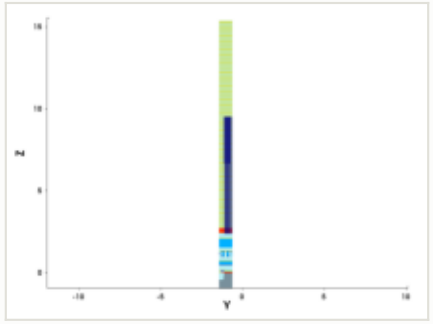

y cut at -1.035 µm

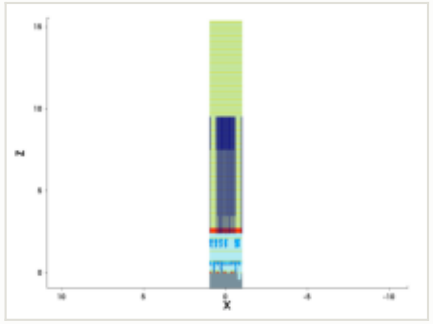

mask for this step

no mask for this step

steps by process area

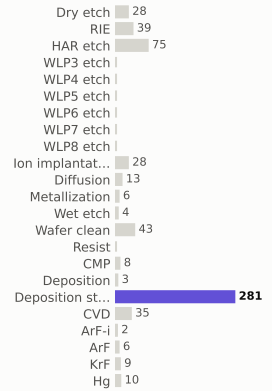

materials deposited (g)

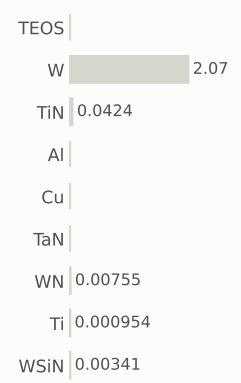

gases emitted (g)

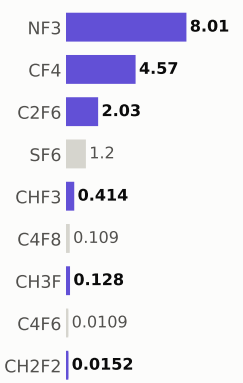

Step #8080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	716.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

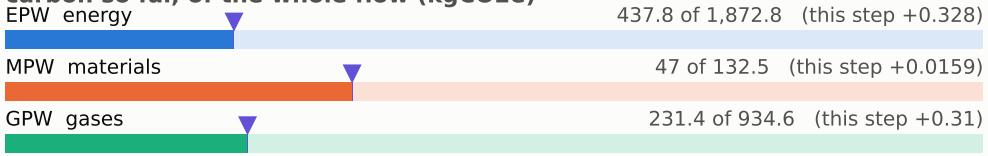

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

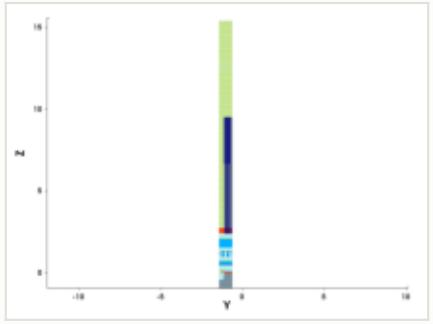

y cut at -1.035 µm

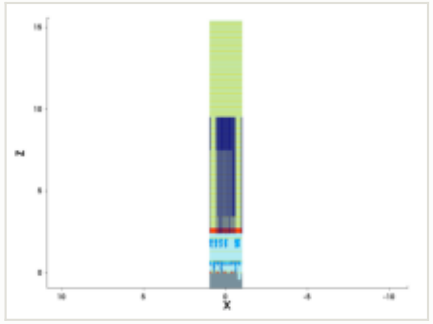

mask for this step

no mask for this step

steps by process area

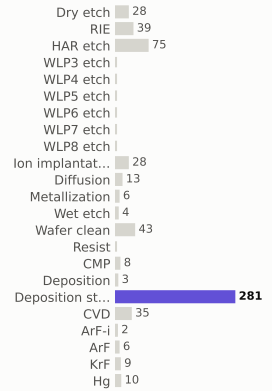

materials deposited (g)

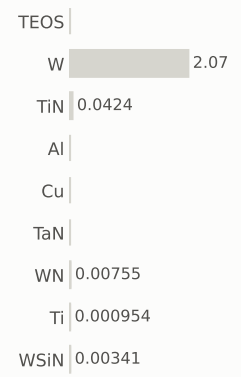

gases emitted (g)

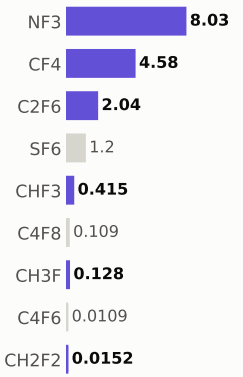

Step #8090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	716.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

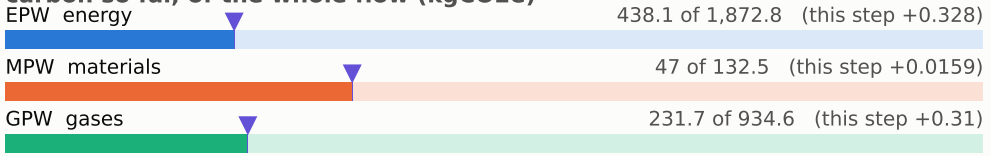

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

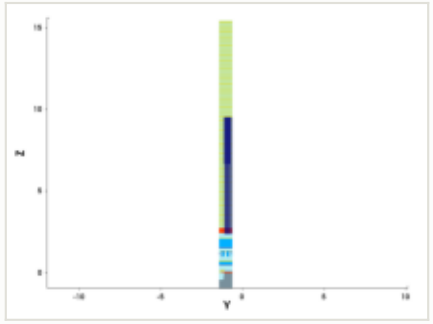

y cut at -1.035 µm

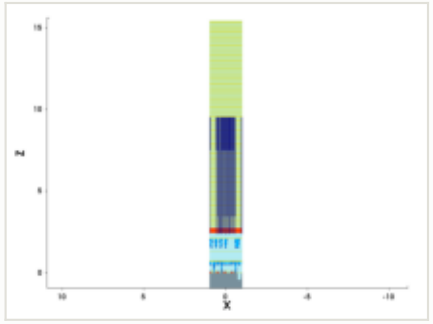

mask for this step

no mask for this step

steps by process area

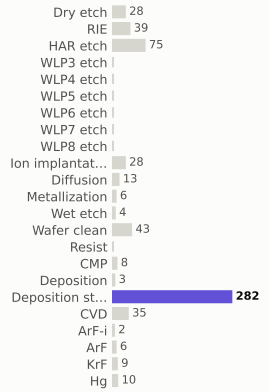

materials deposited (g)

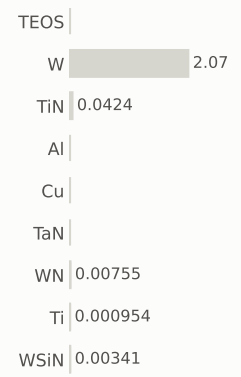

gases emitted (g)

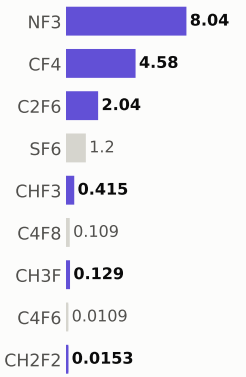

Step #8100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	717.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

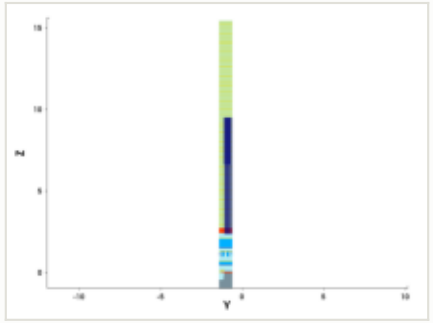

y cut at -1.035 µm

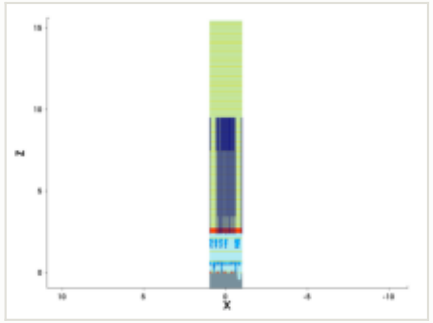

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

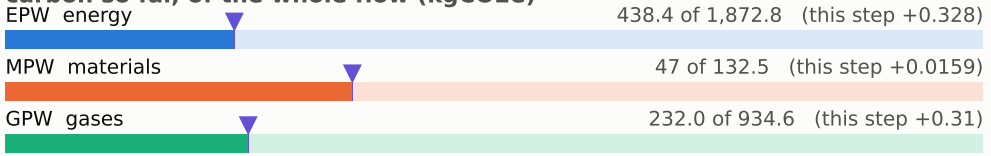

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

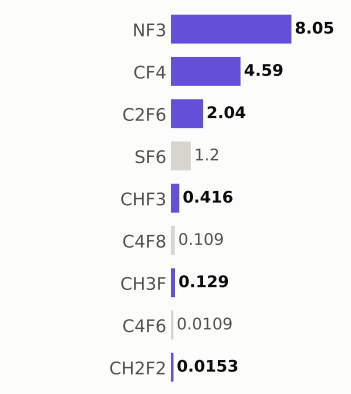

Step #8110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	718.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

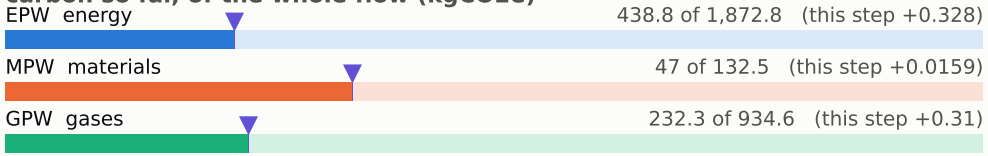

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

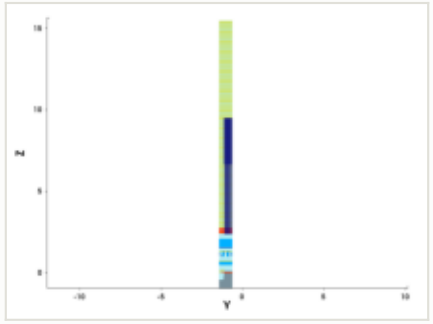

y cut at -1.035 µm

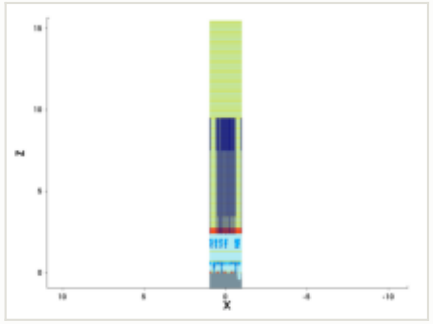

mask for this step

no mask for this step

steps by process area

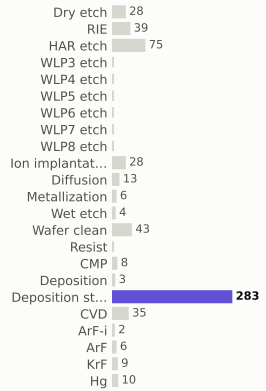

materials deposited (g)

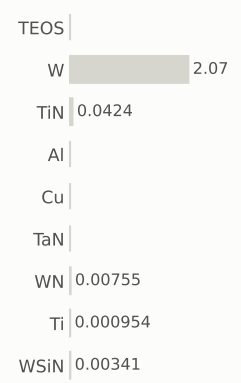

gases emitted (g)

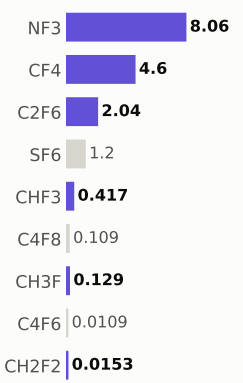

Step #8120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	718.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

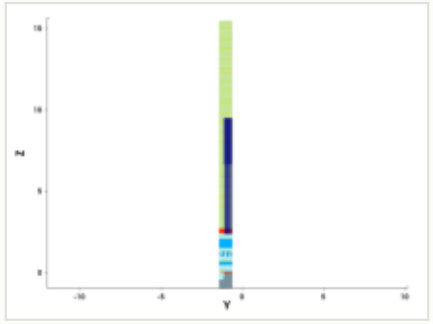

y cut at -1.035 µm

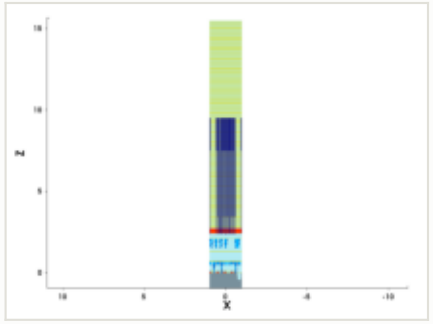

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

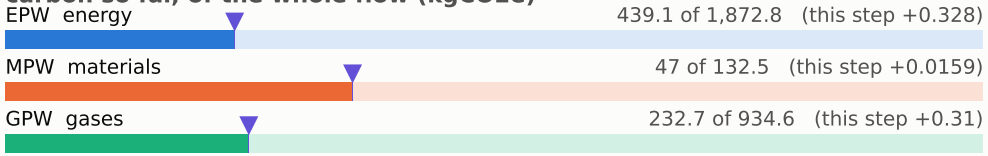

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

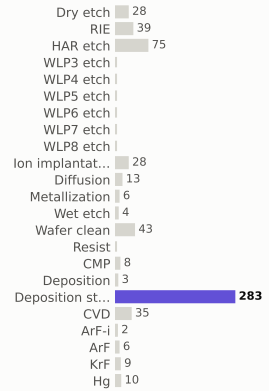

materials deposited (g)

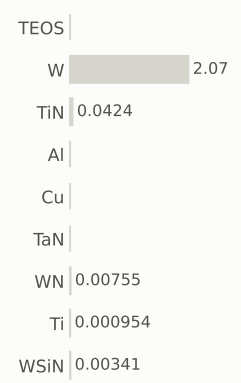

gases emitted (g)

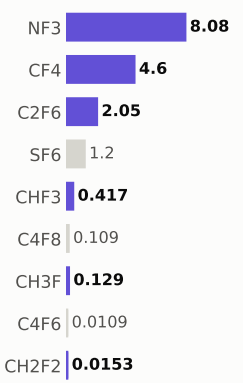

Step #8130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	719.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

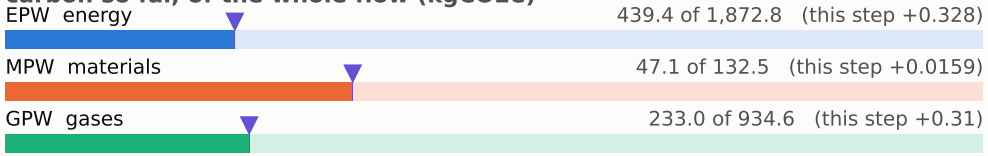

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

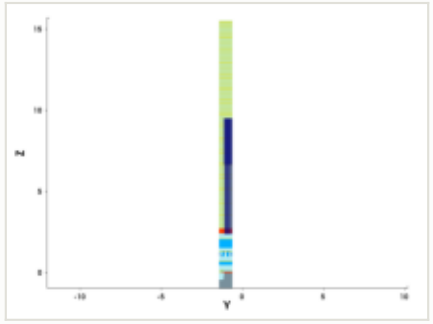

y cut at -1.035 µm

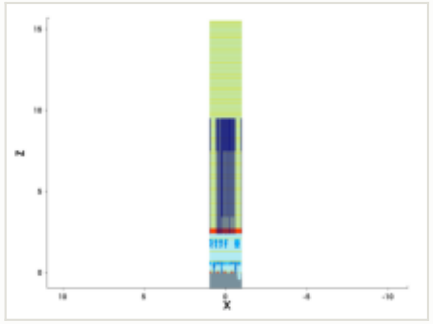

mask for this step

no mask for this step

steps by process area

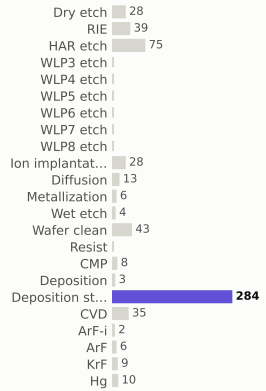

materials deposited (g)

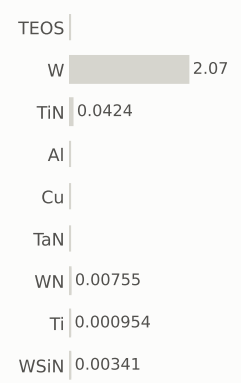

gases emitted (g)

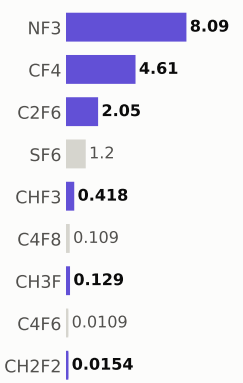

Step #8140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	720.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

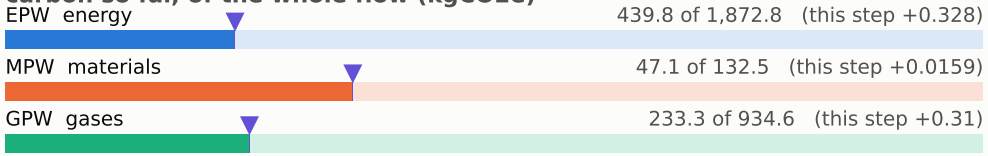

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

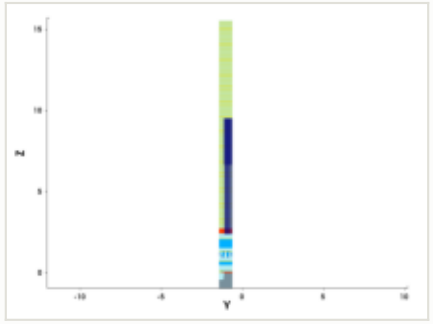

y cut at -1.035 µm

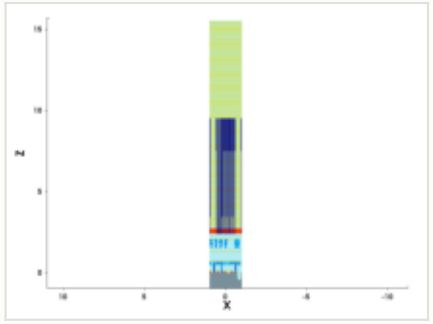

mask for this step

no mask for this step

steps by process area

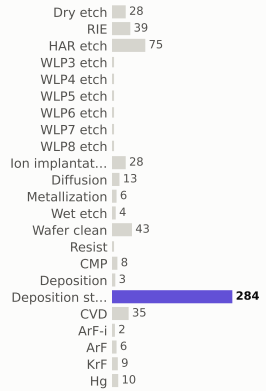

materials deposited (g)

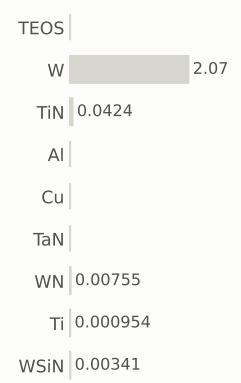

gases emitted (g)

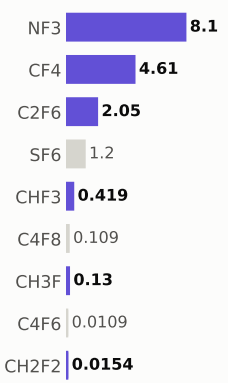

Step #8150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	720.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

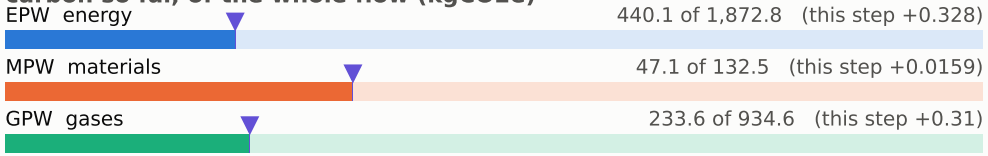

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

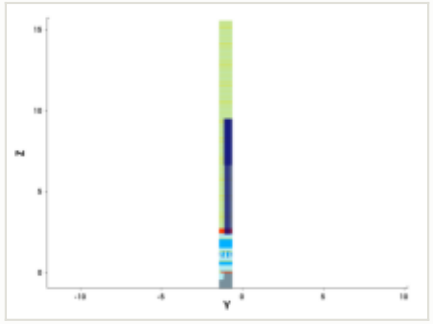

y cut at -1.035 µm

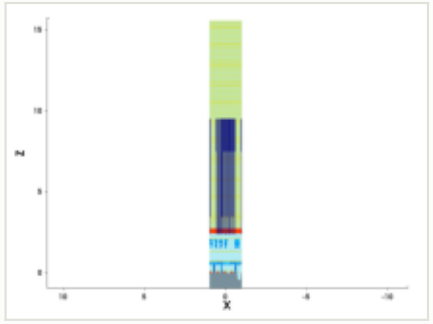

mask for this step

no mask for this step

steps by process area

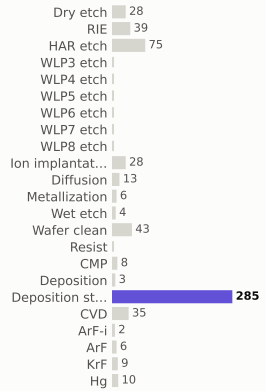

materials deposited (g)

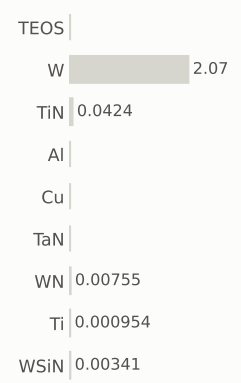

gases emitted (g)

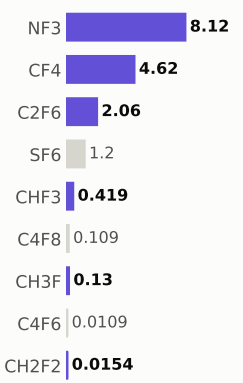

Step #8160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	721.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

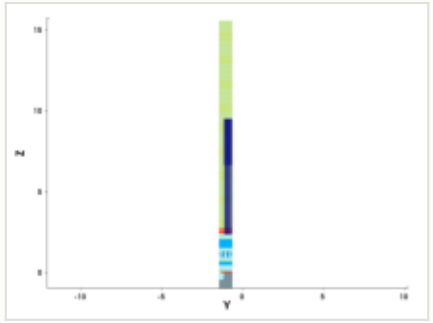

y cut at -1.035 µm

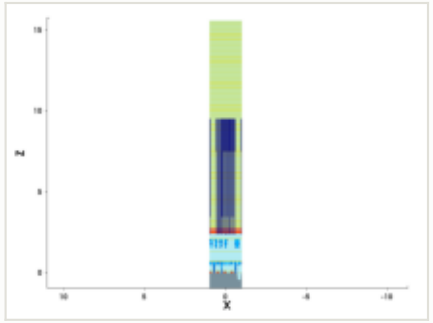

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 440.4 of 1,872.8 (this step +0.328)

MPW materials — 47.1 of 132.5 (this step +0.0159)

GPW gases — 233.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

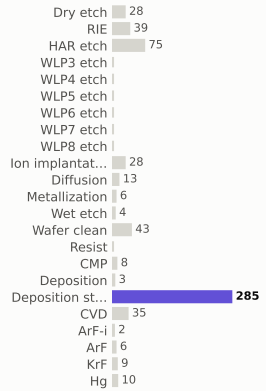

materials deposited (g)

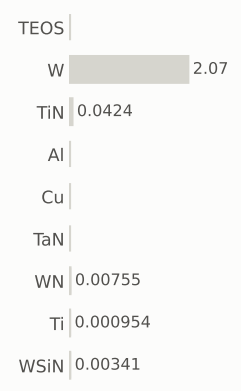

gases emitted (g)

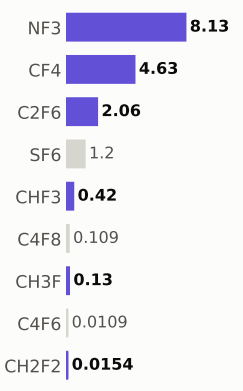

Step #8170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	722.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

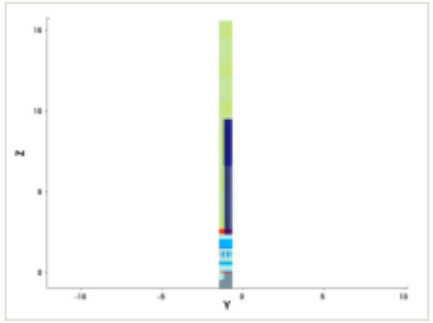

y cut at -1.035 µm

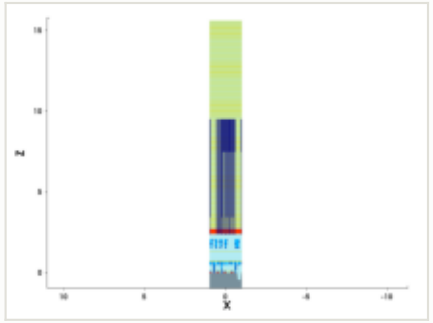

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 440.7 of 1,872.8 (this step +0.328)

MPW materials — 47.1 of 132.5 (this step +0.0159)

GPW gases — 234.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

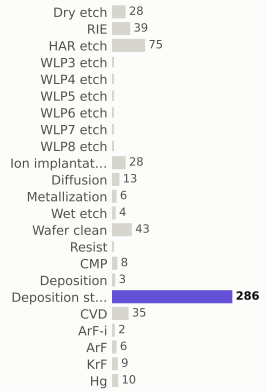

materials deposited (g)

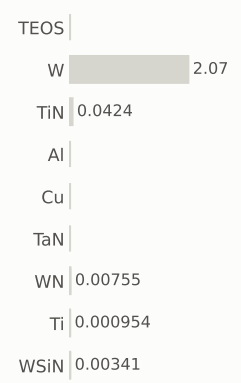

gases emitted (g)

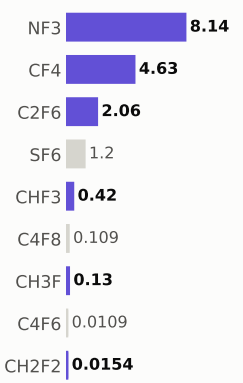

Step #8180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	722.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

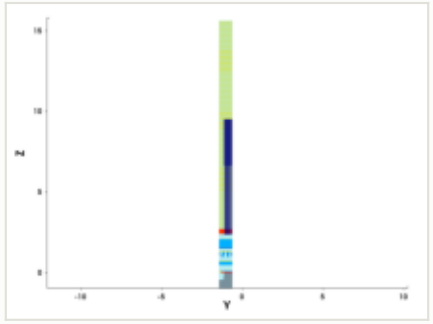

y cut at -1.035 µm

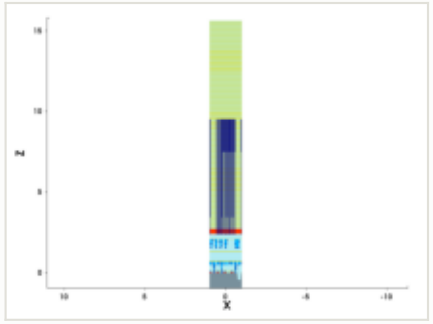

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 441.1 of 1,872.8 (this step +0.328)

MPW materials — 47.1 of 132.5 (this step +0.0159)

GPW gases — 234.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

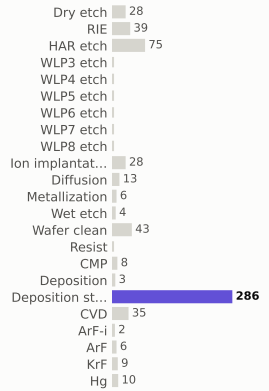

materials deposited (g)

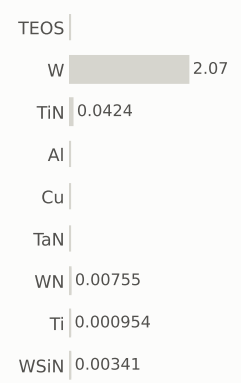

gases emitted (g)

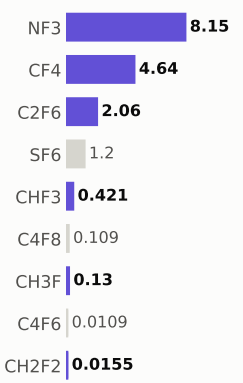

Step #8190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	723.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

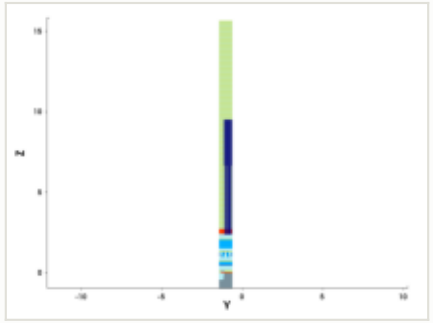

y cut at -1.035 µm

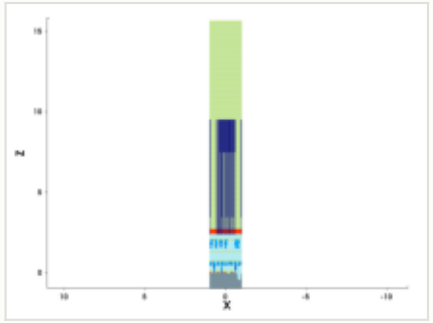

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 441.4 of 1,872.8 (this step +0.328)

MPW materials — 47.2 of 132.5 (this step +0.0159)

GPW gases — 234.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

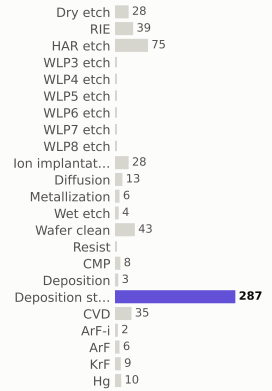

materials deposited (g)

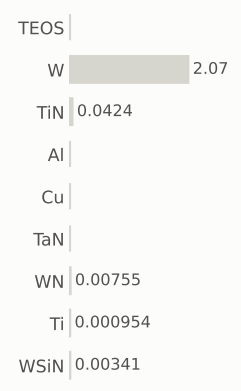

gases emitted (g)

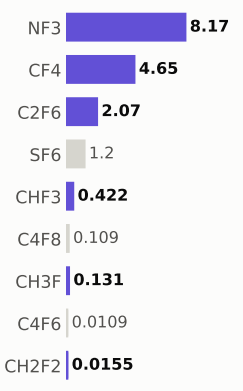

Step #8200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	724.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

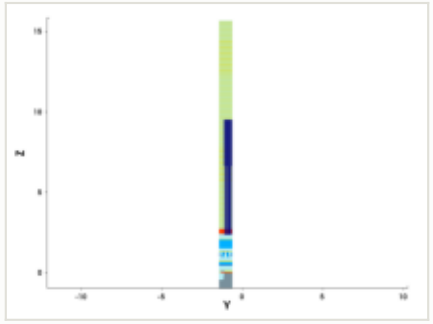

y cut at -1.035 µm

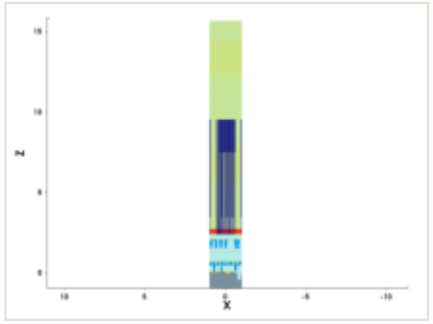

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

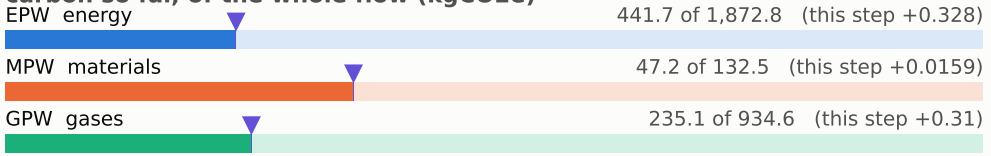

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

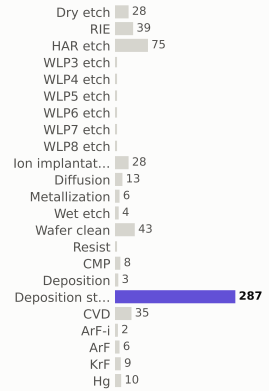

materials deposited (g)

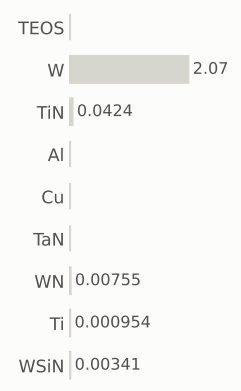

gases emitted (g)

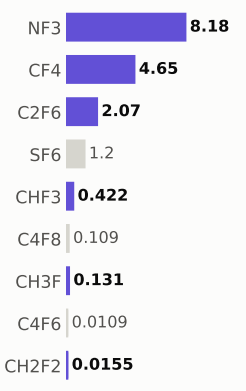

Step #8210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	724.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

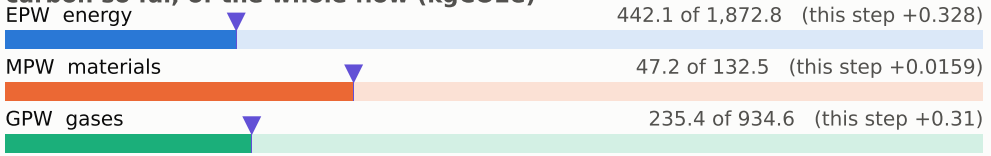

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

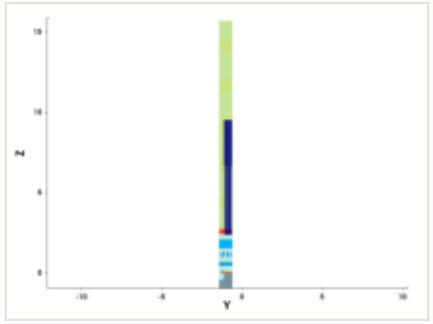

y cut at -1.035 µm

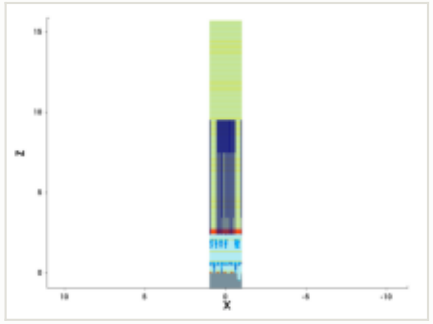

mask for this step

no mask for this step

steps by process area

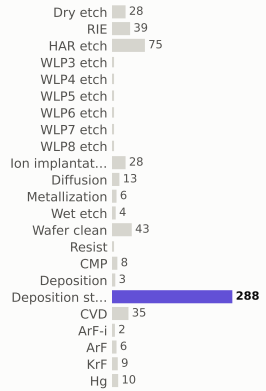

materials deposited (g)

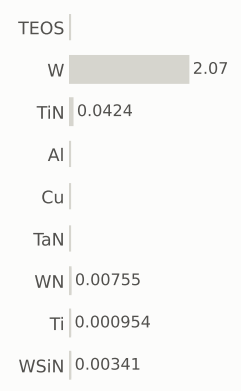

gases emitted (g)

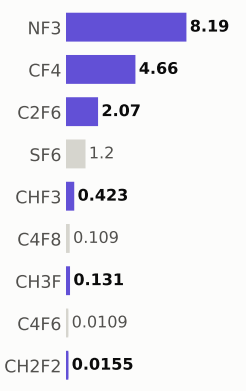

Step #8220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	725.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

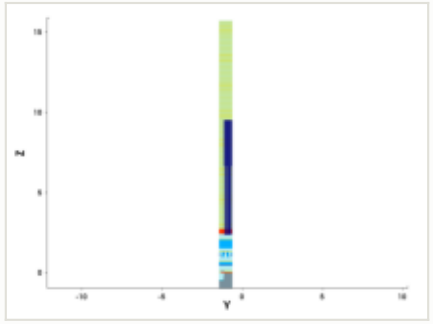

y cut at -1.035 µm

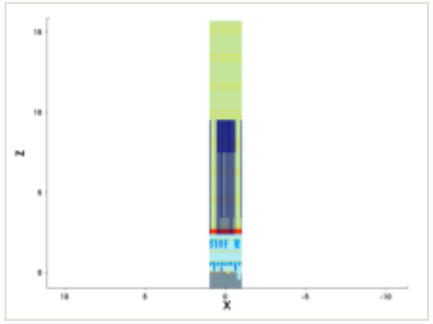

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 442.4 of 1,872.8 (this step +0.328)

MPW materials — 47.2 of 132.5 (this step +0.0159)

GPW gases — 235.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

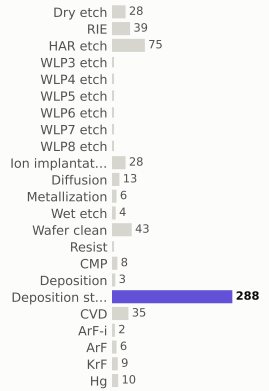

materials deposited (g)

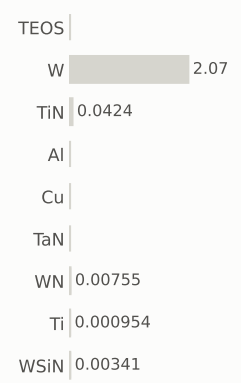

gases emitted (g)



Step #8230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	726.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

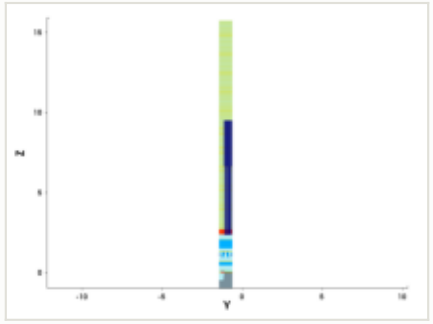

y cut at -1.035 µm

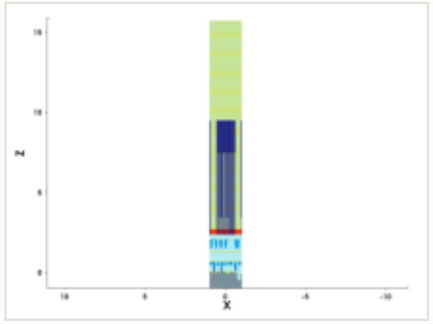

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 442.7 of 1,872.8 (this step +0.328)

MPW materials — 47.2 of 132.5 (this step +0.0159)

GPW gases — 236.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

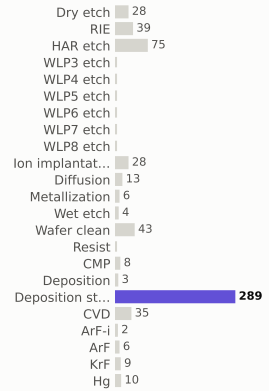

materials deposited (g)

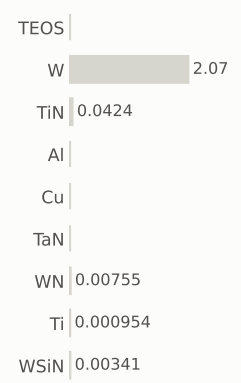

gases emitted (g)

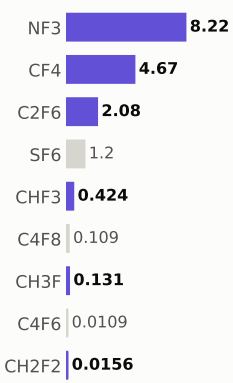

Step #8240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	726.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

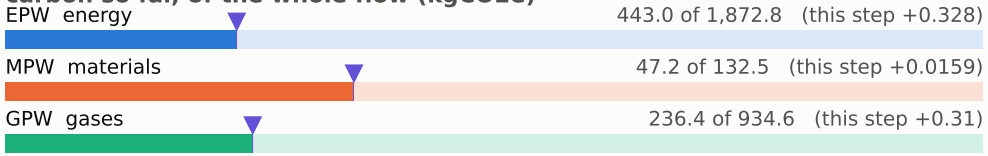

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

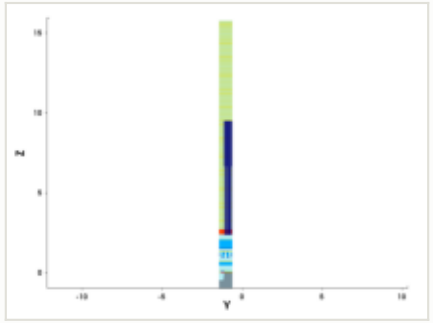

y cut at -1.035 µm

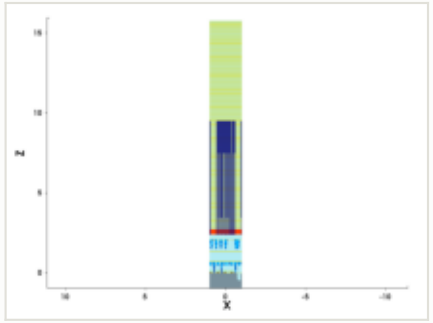

mask for this step

no mask for this step

steps by process area

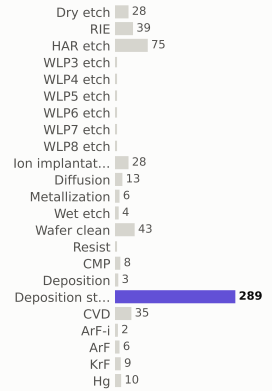

materials deposited (g)

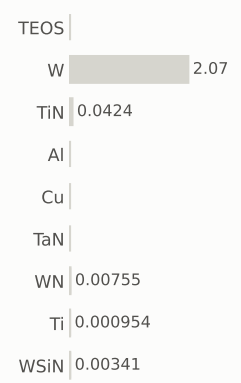

gases emitted (g)

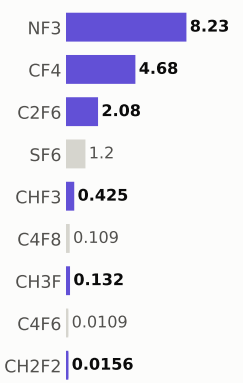

Step #8250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	727.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

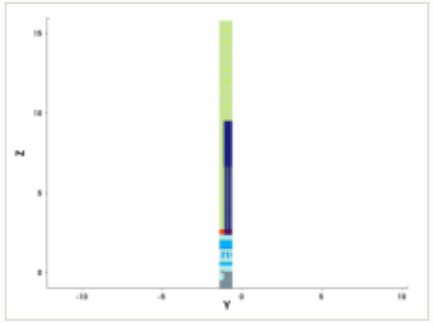

y cut at -1.035 µm

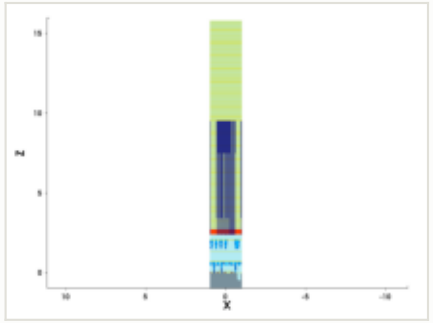

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

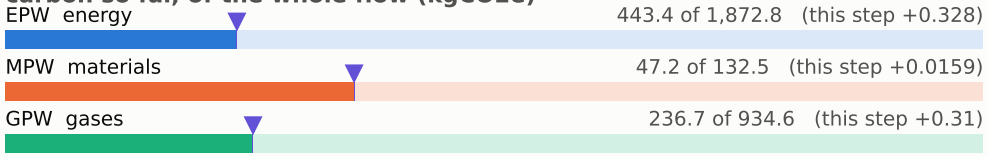

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

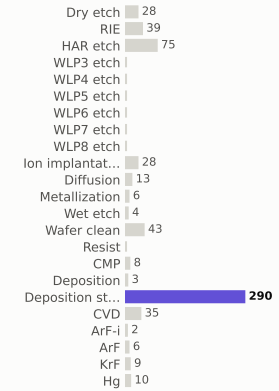

materials deposited (g)

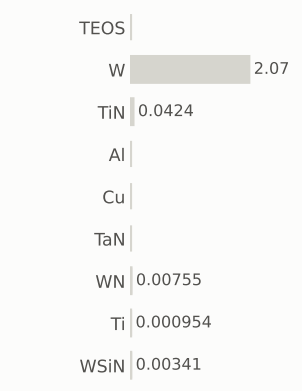

gases emitted (g)

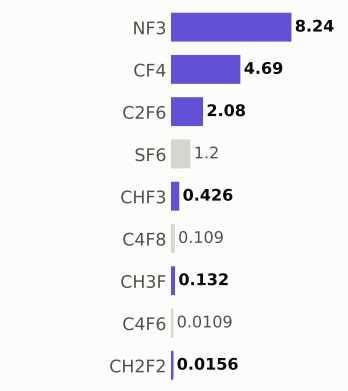

Step #8260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	728.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

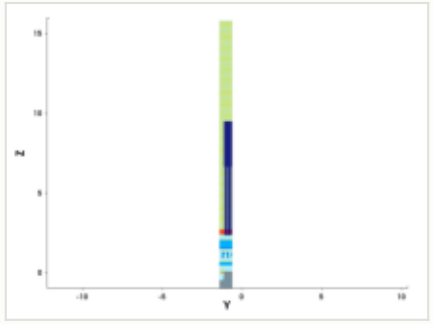

y cut at -1.035 µm

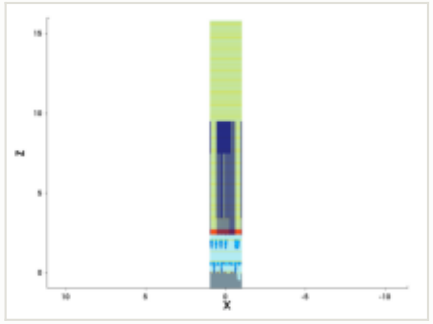

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

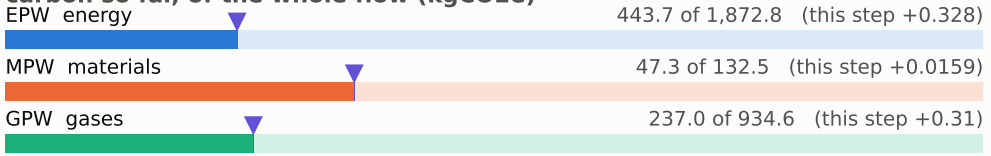

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #8270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	728.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

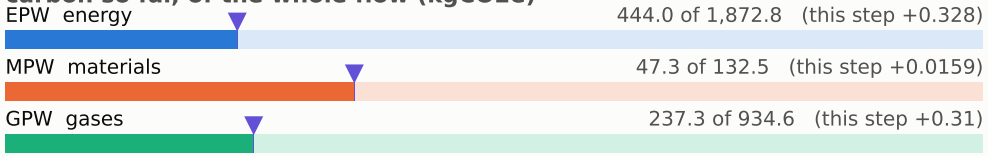

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

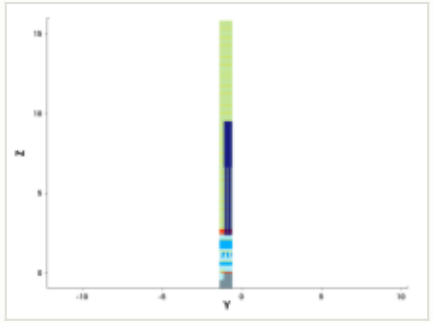

y cut at -1.035 µm

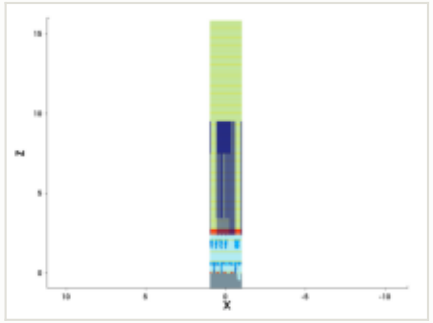

mask for this step

no mask for this step

steps by process area

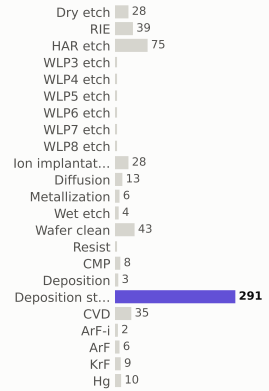

materials deposited (g)

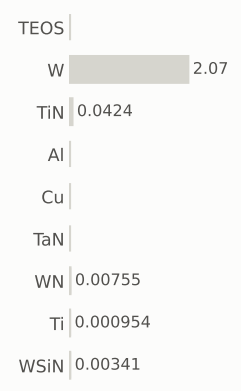

gases emitted (g)

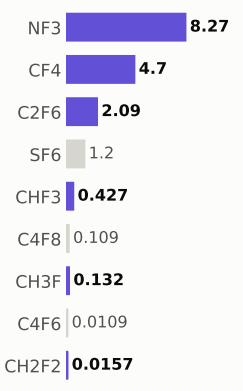

Step #8280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	729.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 444.3 of 1,872.8 (this step +0.328)

MPW materials — 47.3 of 132.5 (this step +0.0159)

GPW gases — 237.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

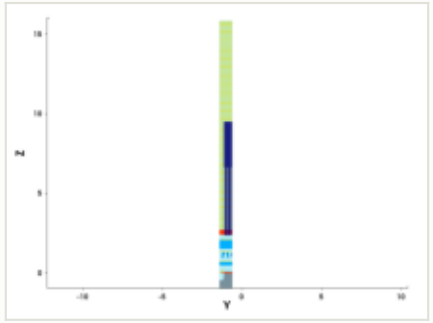

y cut at -1.035 µm

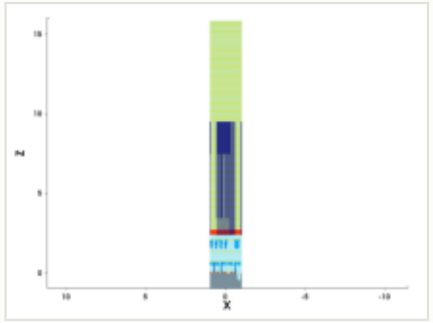

mask for this step

no mask for this step

steps by process area

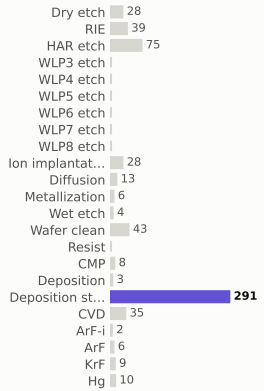

materials deposited (g)

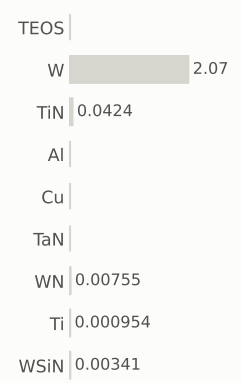

gases emitted (g)

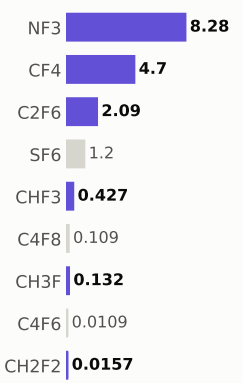

Step #8290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	729.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

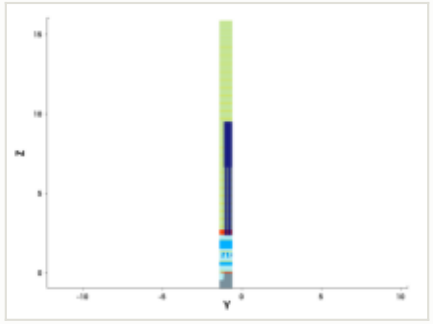

y cut at -1.035 µm

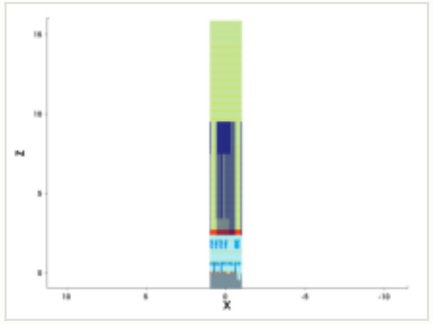

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 444.7 of 1,872.8 (this step +0.328)

MPW materials — 47.3 of 132.5 (this step +0.0159)

GPW gases — 237.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

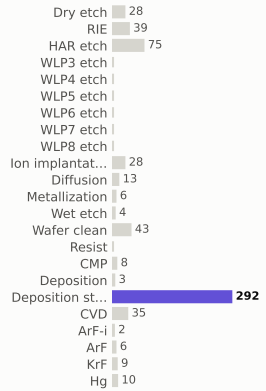

materials deposited (g)

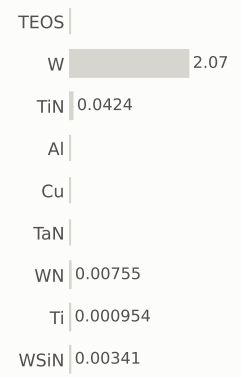

gases emitted (g)

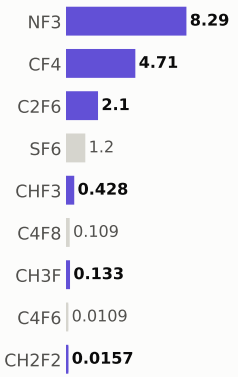

Step #8300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	730.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

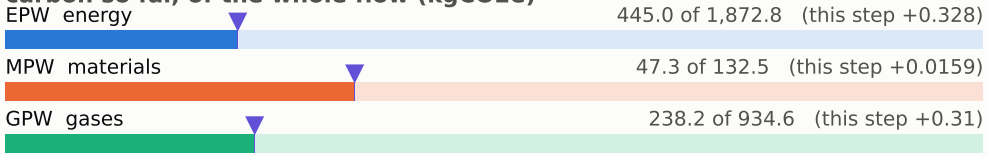

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

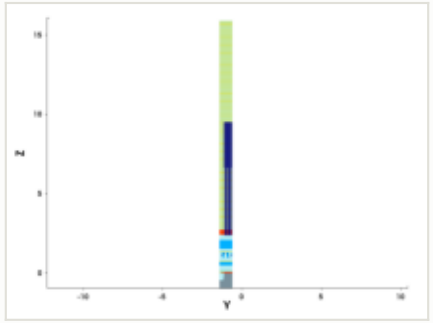

y cut at -1.035 µm

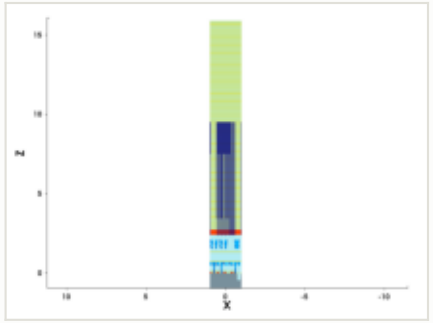

mask for this step

no mask for this step

steps by process area

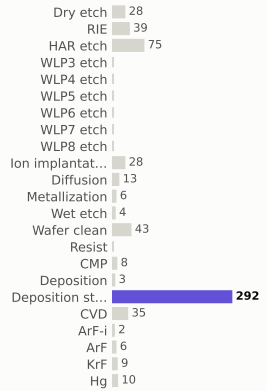

materials deposited (g)

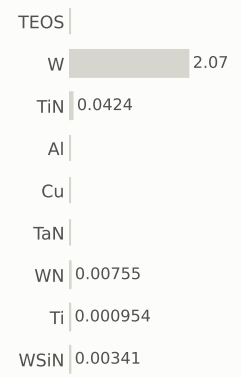

gases emitted (g)



Step #8310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	731.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

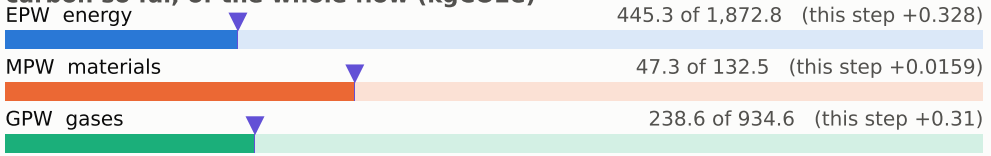

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

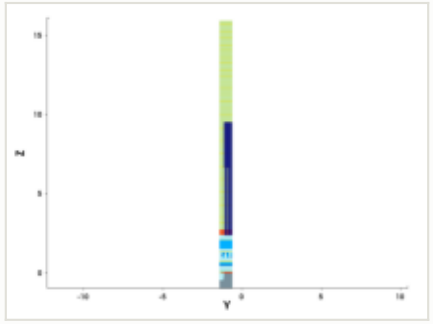

y cut at -1.035 µm

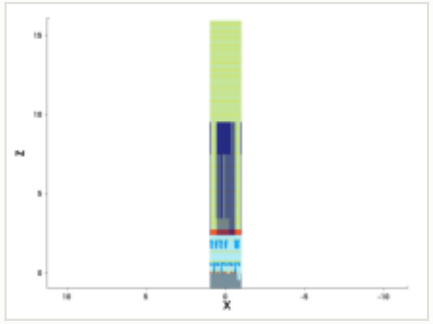

mask for this step

no mask for this step

steps by process area

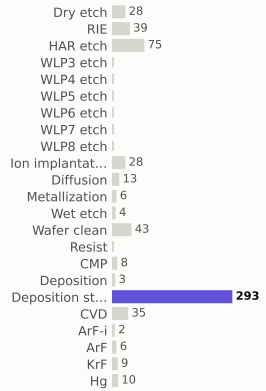

materials deposited (g)

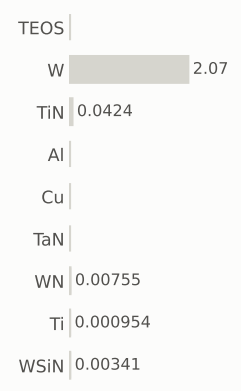

gases emitted (g)

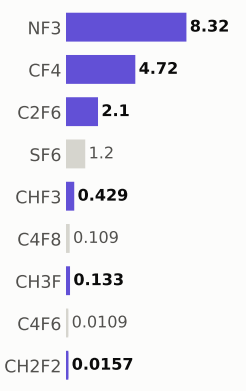

Step #8320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	731.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 445.7 of 1,872.8 (this step +0.328)

MPW materials — 47.4 of 132.5 (this step +0.0159)

GPW gases — 238.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

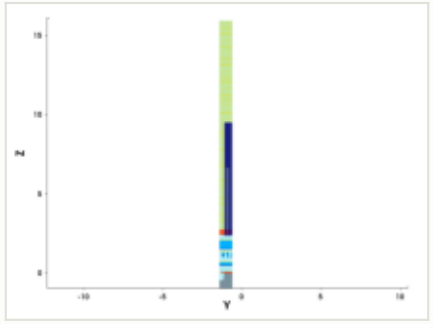

y cut at -1.035 µm

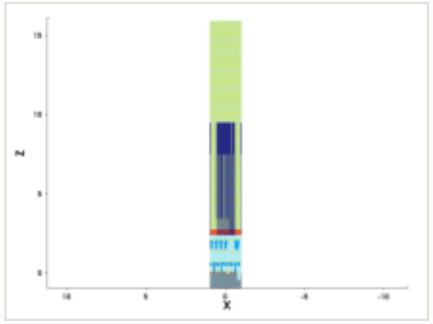

mask for this step

no mask for this step

steps by process area

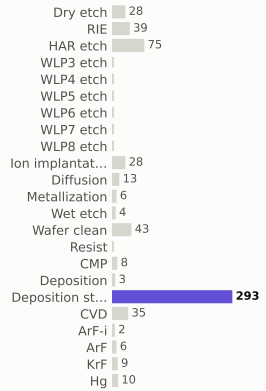

materials deposited (g)

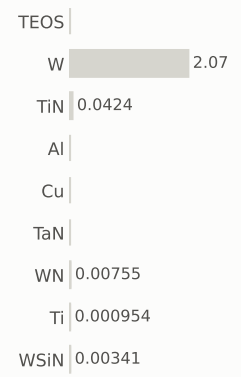

gases emitted (g)

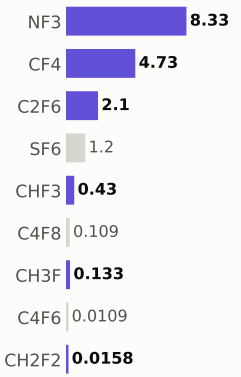

Step #8330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	732.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

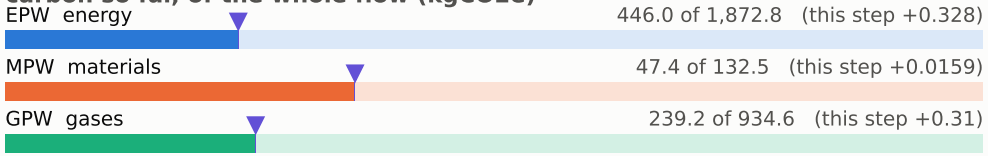

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

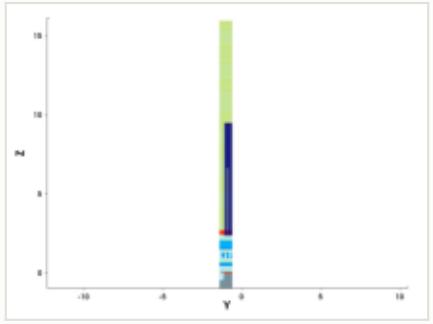

y cut at -1.035 µm

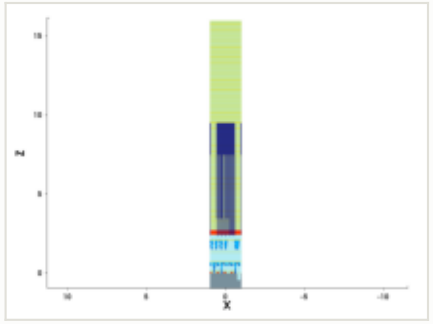

mask for this step

no mask for this step

steps by process area

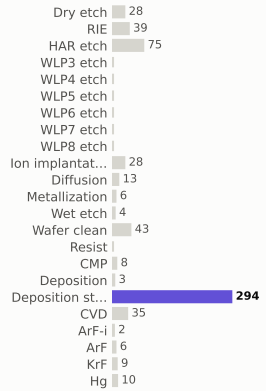

materials deposited (g)

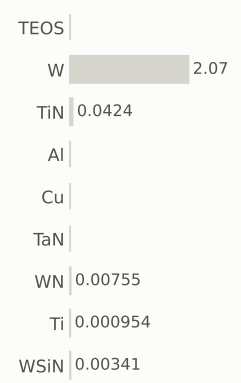

gases emitted (g)

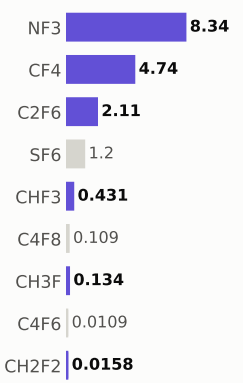

Step #8340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	733.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

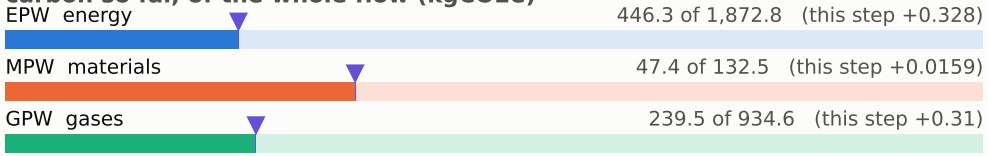

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

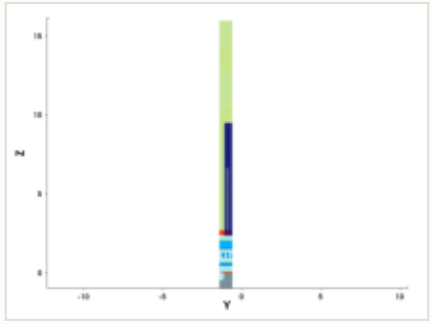

y cut at -1.035 µm

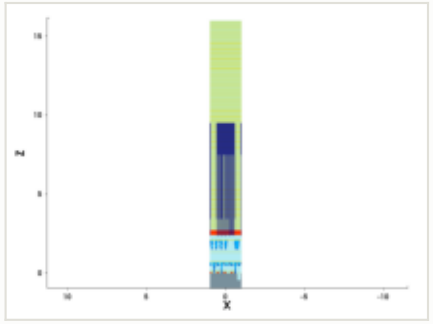

mask for this step

no mask for this step

steps by process area

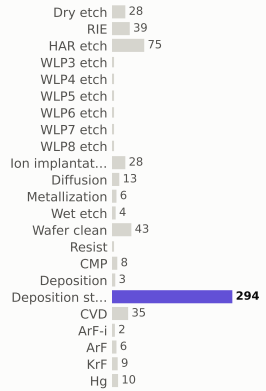

materials deposited (g)

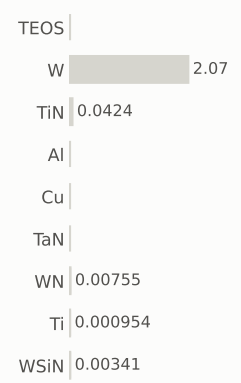

gases emitted (g)

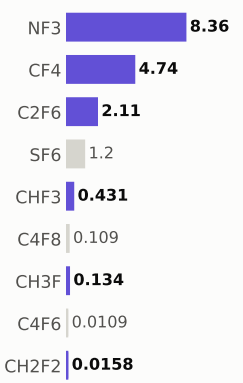

Step #8350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	733.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

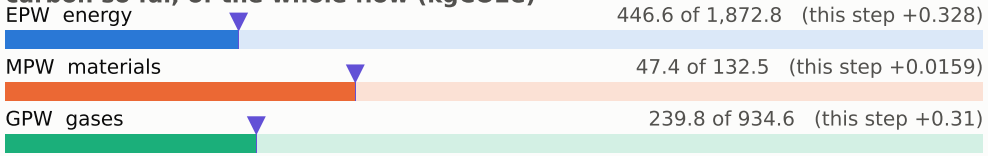

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

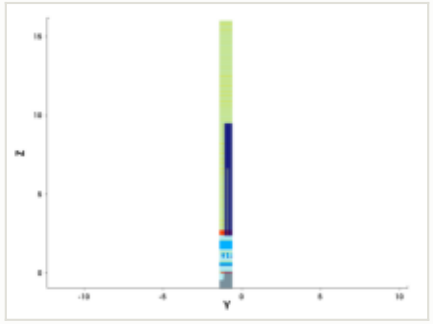

y cut at -1.035 µm

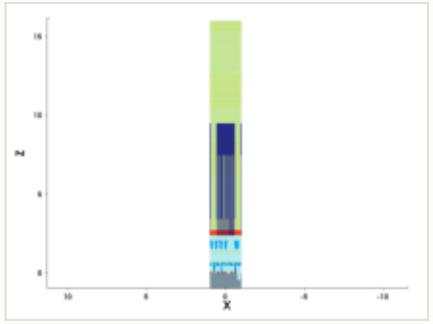

mask for this step

no mask for this step

steps by process area

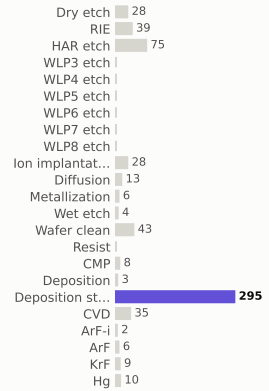

materials deposited (g)

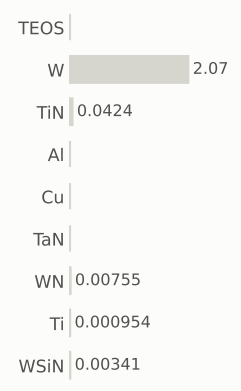

gases emitted (g)

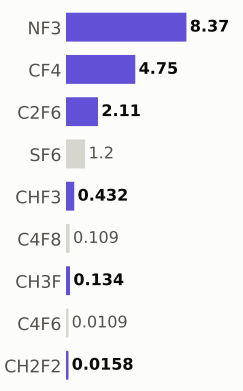

Step #8360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	734.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

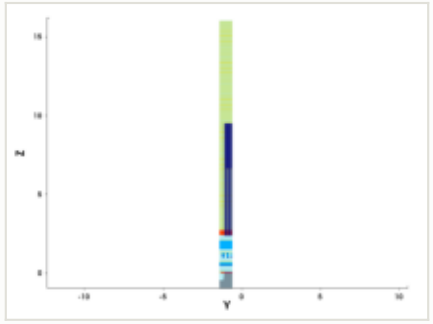

y cut at -1.035 µm

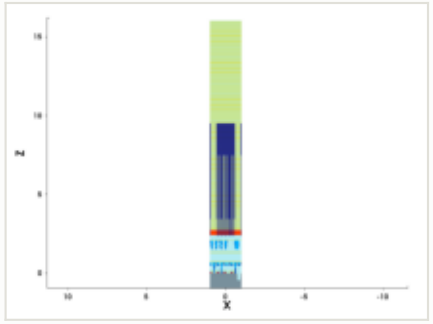

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

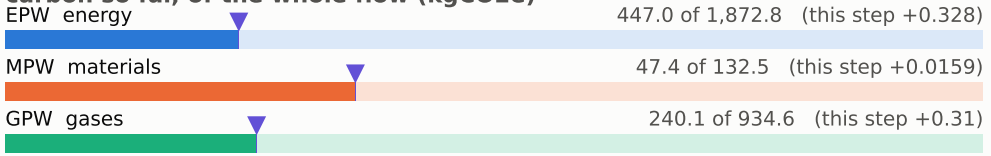

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

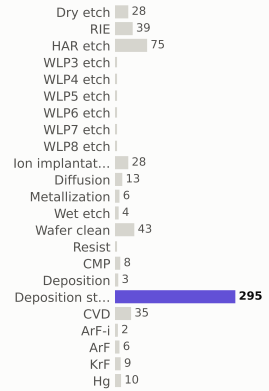

materials deposited (g)

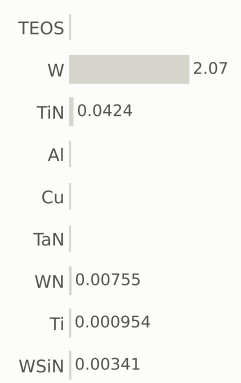

gases emitted (g)

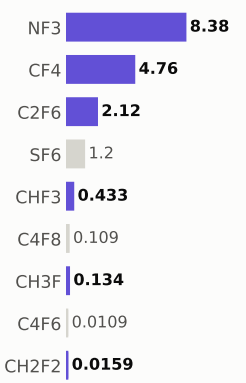

Step #8370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	735.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 447.3 of 1,872.8 (this step +0.328)

MPW materials — 47.4 of 132.5 (this step +0.0159)

GPW gases — 240.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

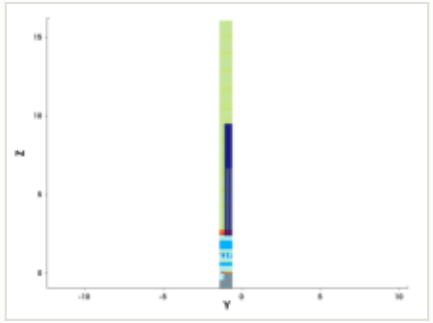

y cut at -1.035 µm

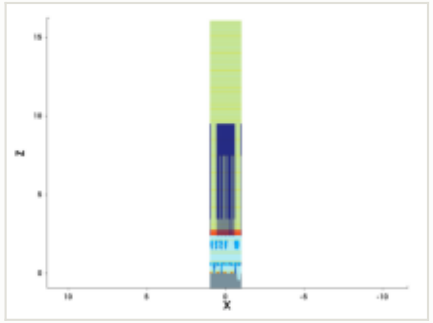

mask for this step

no mask for this step

steps by process area

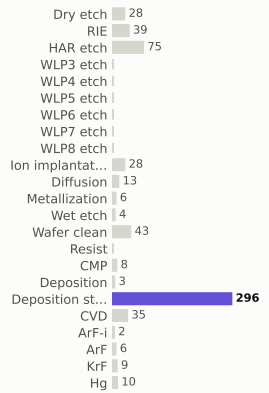

materials deposited (g)

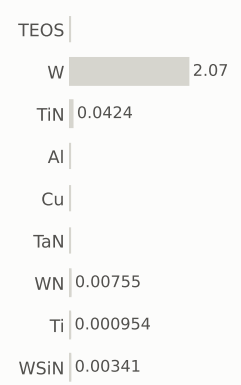

gases emitted (g)

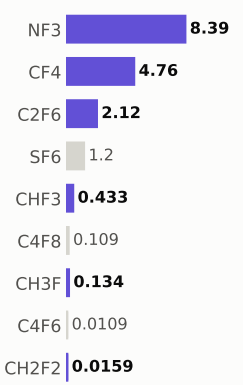

Step #8380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	735.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

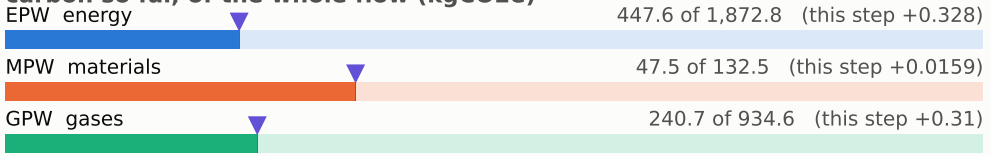

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

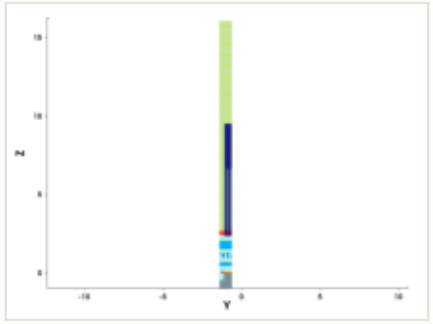

y cut at -1.035 µm

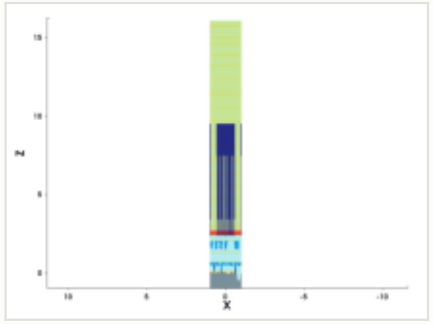

mask for this step

no mask for this step

steps by process area

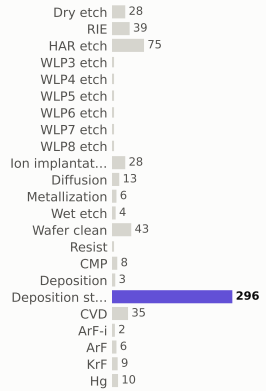

materials deposited (g)

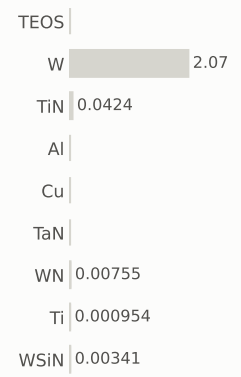

gases emitted (g)

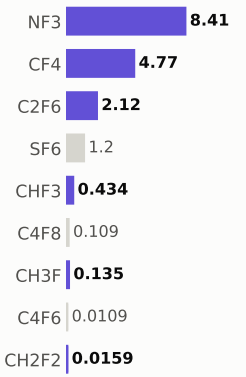

Step #8390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	736.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

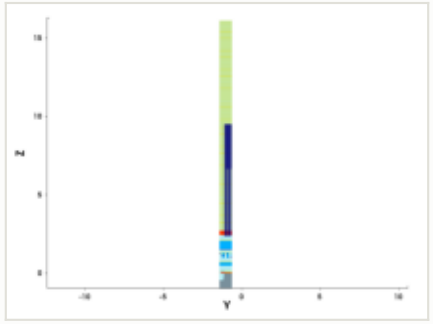

y cut at -1.035 µm

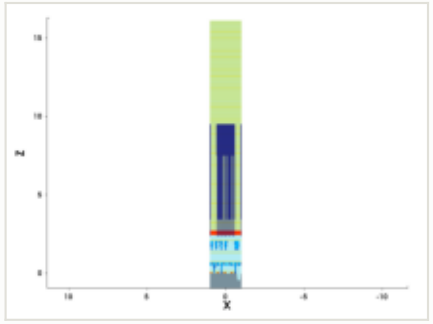

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 448.0 of 1,872.8 (this step +0.328)

MPW materials — 47.5 of 132.5 (this step +0.0159)

GPW gases — 241.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

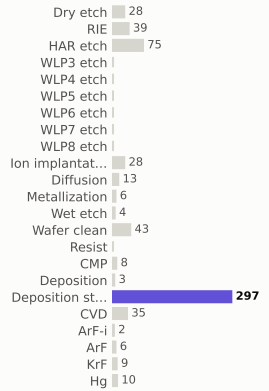

materials deposited (g)

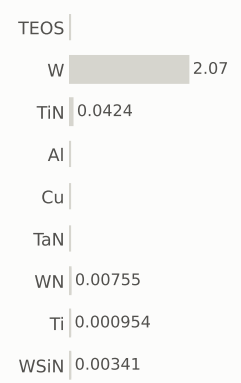

gases emitted (g)

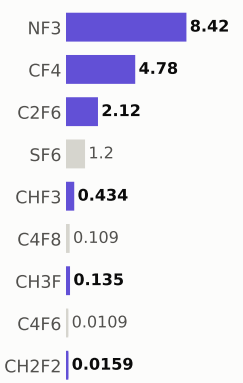

Step #8400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	737.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

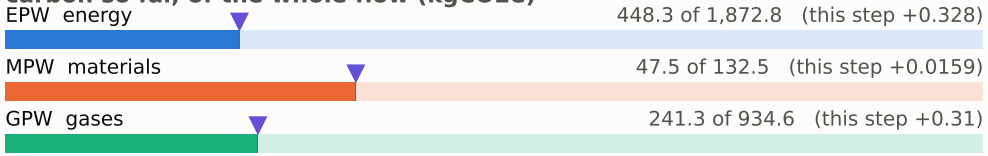

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

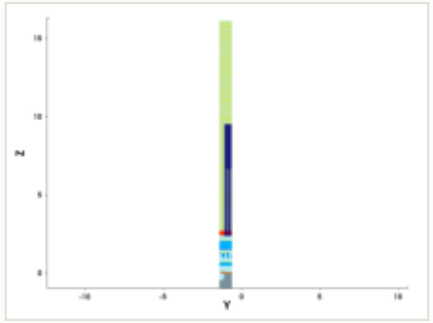

y cut at -1.035 µm

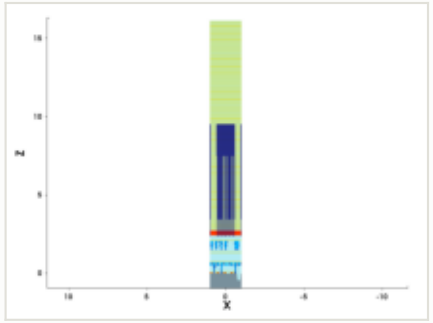

mask for this step

no mask for this step

steps by process area

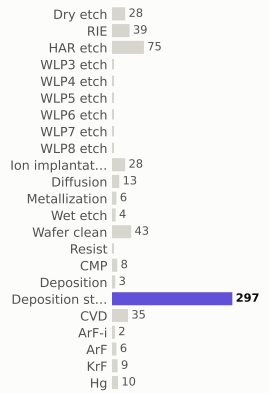

materials deposited (g)

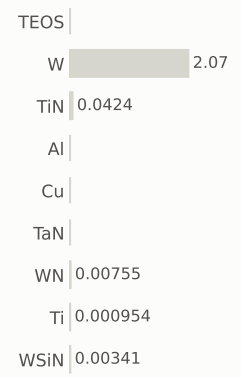

gases emitted (g)

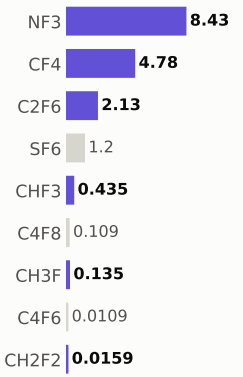

Step #8410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	737.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 448.6 of 1,872.8 (this step +0.328)

MPW materials — 47.5 of 132.5 (this step +0.0159)

GPW gases — 241.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

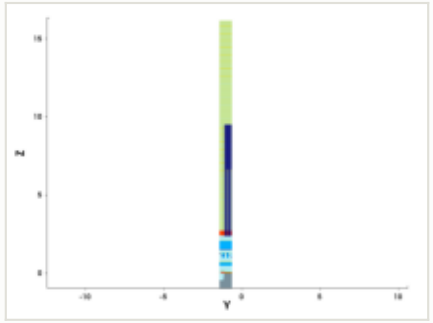

y cut at -1.035 µm

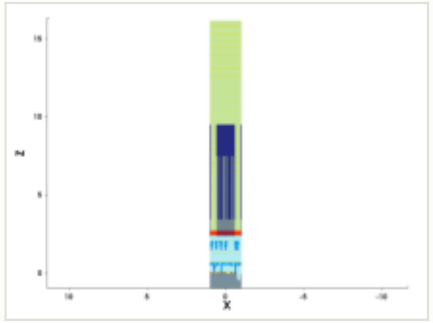

mask for this step

no mask for this step

steps by process area

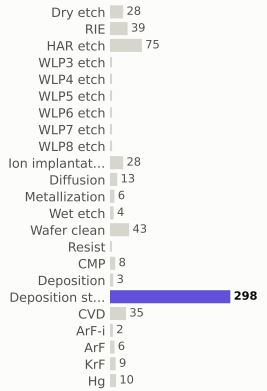

materials deposited (g)

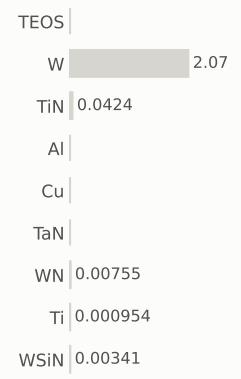

gases emitted (g)

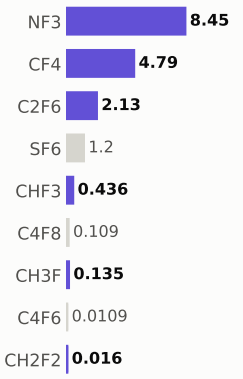

Step #8420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	738.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

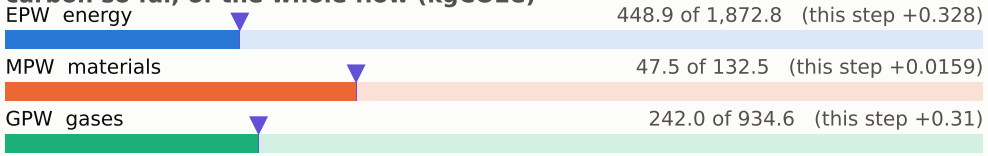

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

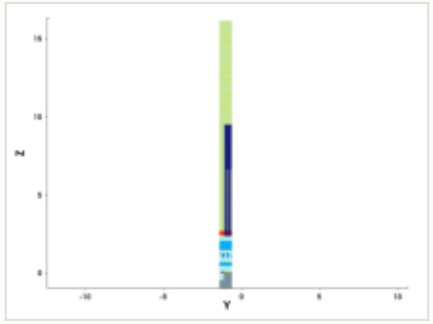

y cut at -1.035 µm

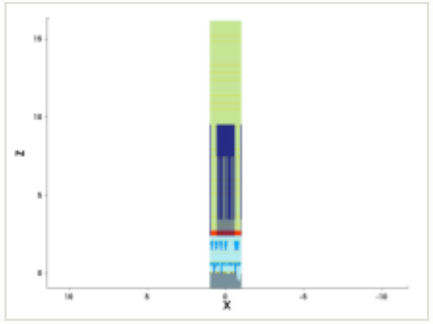

mask for this step

no mask for this step

steps by process area

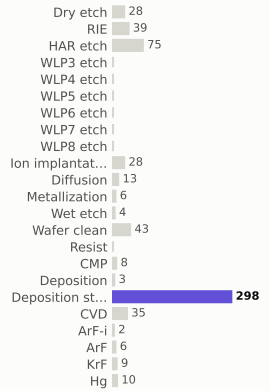

materials deposited (g)

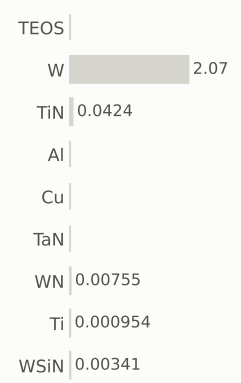

gases emitted (g)

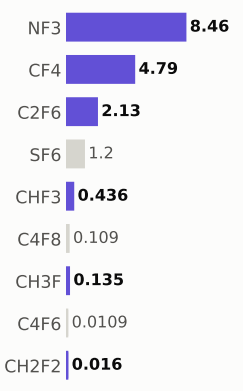

Step #8430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	739.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 449.3 of 1,872.8 (this step +0.328)

MPW materials — 47.5 of 132.5 (this step +0.0159)

GPW gases — 242.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

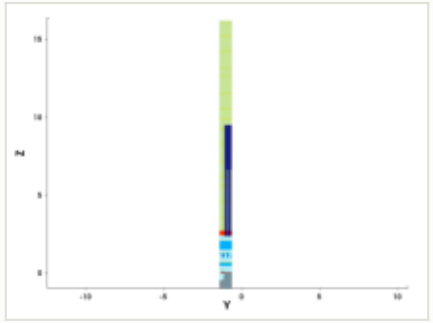

y cut at -1.035 µm

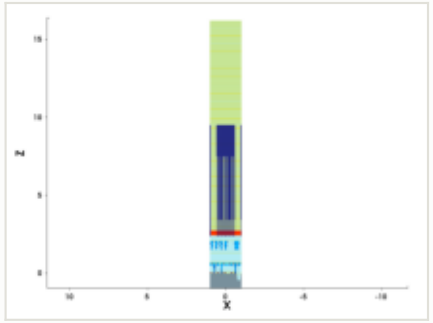

mask for this step

no mask for this step

steps by process area

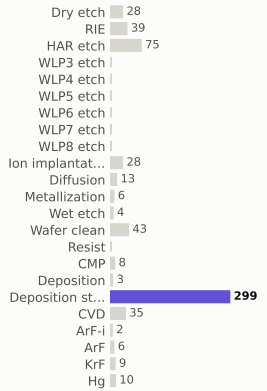

materials deposited (g)

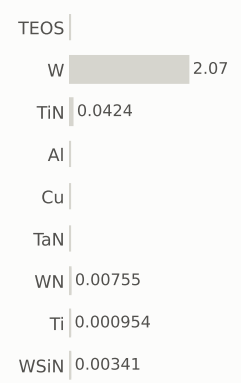

gases emitted (g)

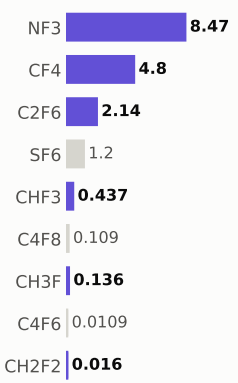

Step #8440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	739.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

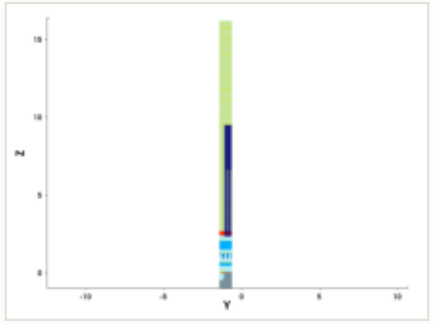

y cut at -1.035 µm

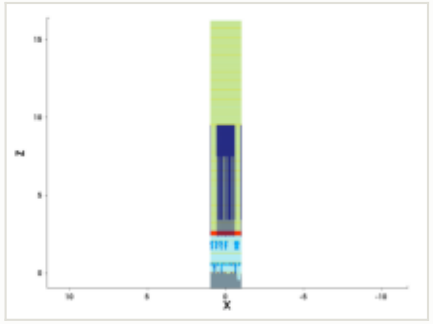

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

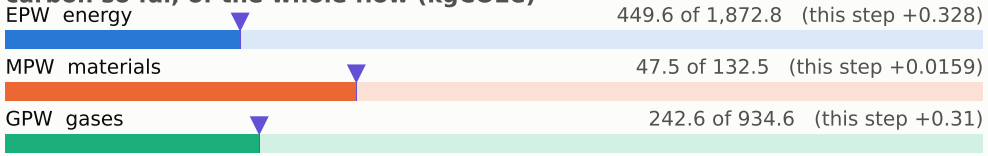

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

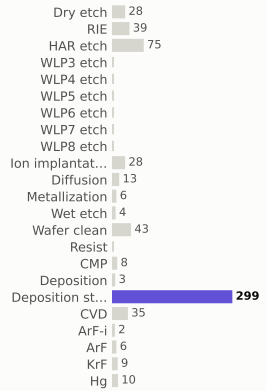

materials deposited (g)

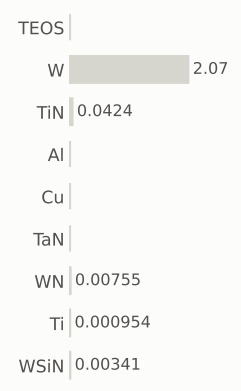

gases emitted (g)

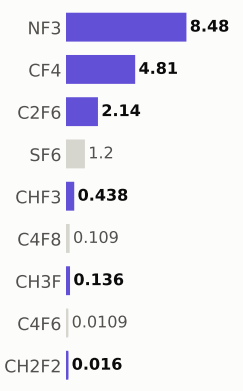

Step #8450: CVD

depo_isotropic · CVD

1.31	741.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

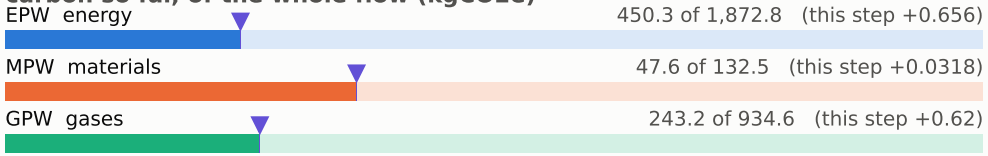

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

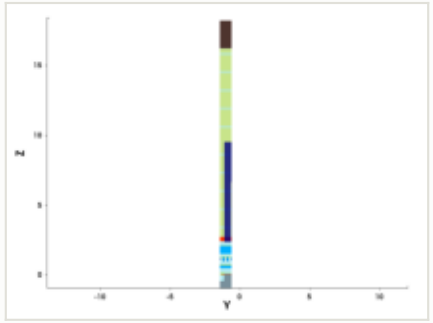

y cut at -1.035 µm

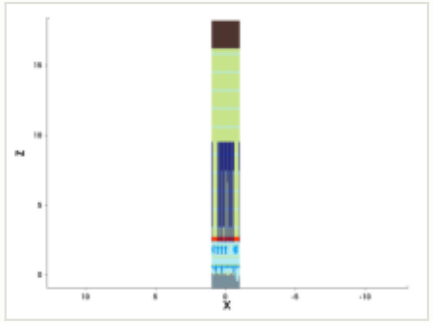

mask for this step

no mask for this step

steps by process area

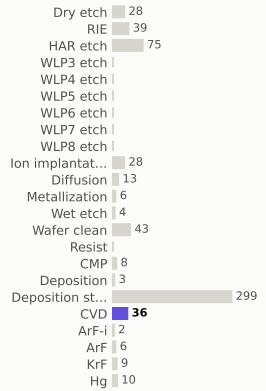

materials deposited (g)

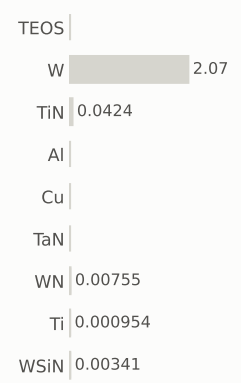

gases emitted (g)

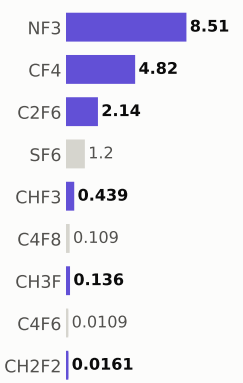

Step #8460: CVD

depo_isotropic · CVD

1.31	742.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

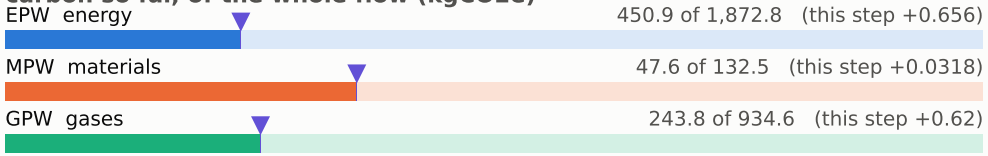

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

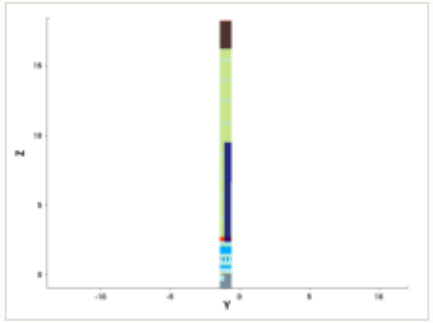

y cut at -1.035 µm

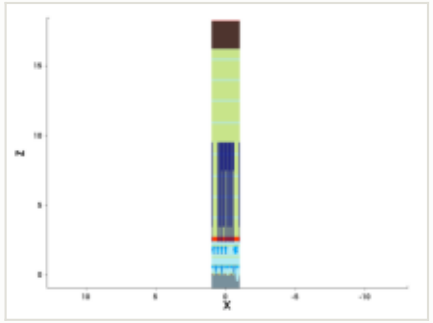

mask for this step

no mask for this step

steps by process area

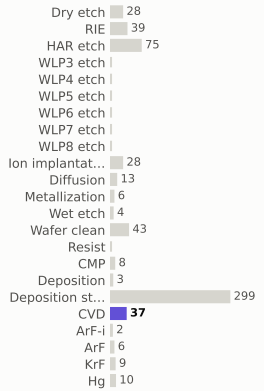

materials deposited (g)

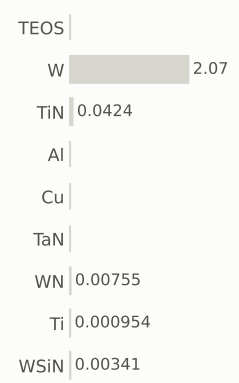

gases emitted (g)

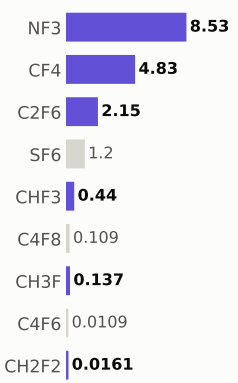

Step #8470: Wafer_clean

clean · Wafer_clean

0.169	742.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

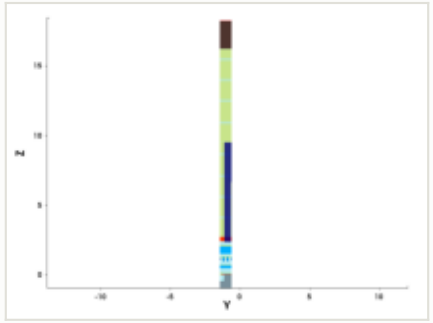

y cut at -1.035 µm

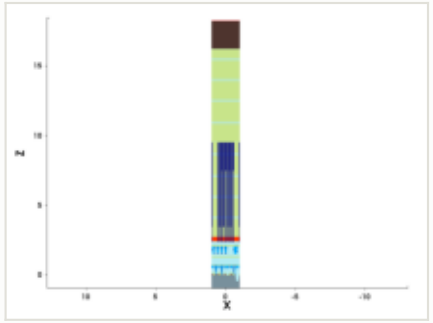

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

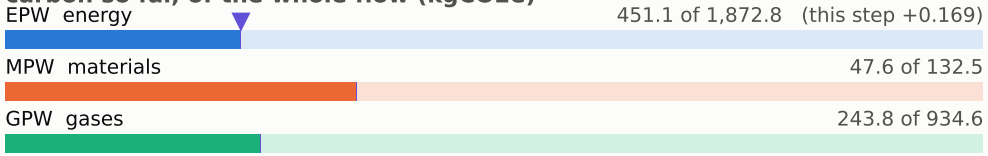

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

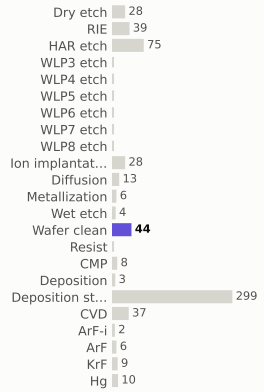

materials deposited (g)



gases emitted (g)

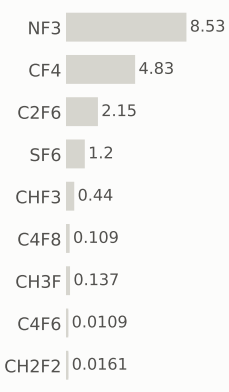

Step #8480: ArF-i

litho_patterning · ArF-i

0.217	742.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

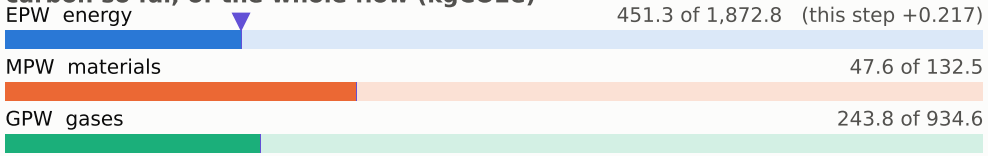

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

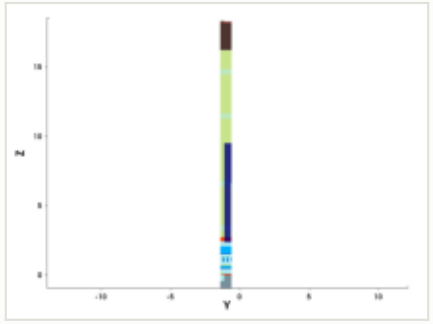

y cut at -1.035 µm

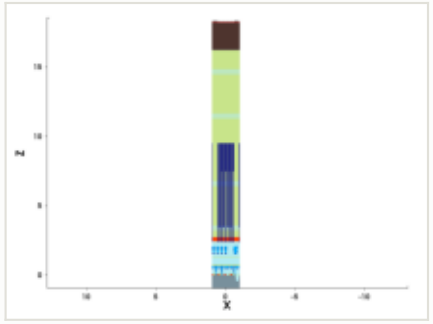

mask: layer 27:0 (OASIS)

steps by process area

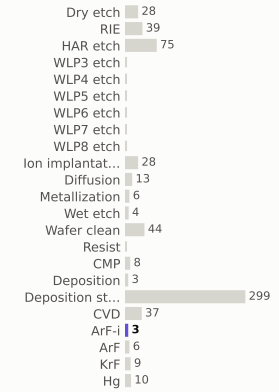

materials deposited (g)

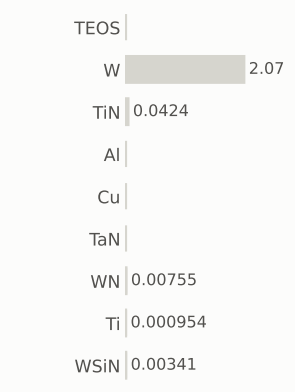

gases emitted (g)

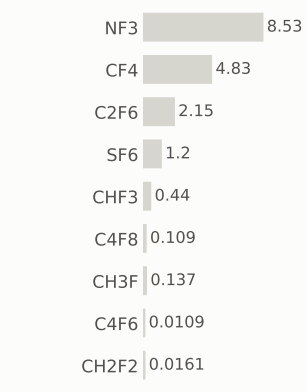

Step #8490: RIE

etch_anisotropic · RIE

1.04	743.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

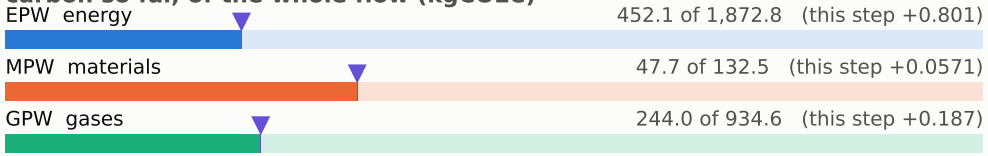

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

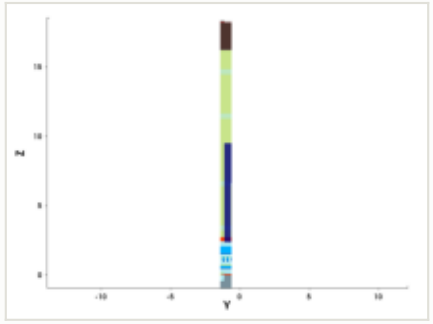

y cut at -1.035 µm

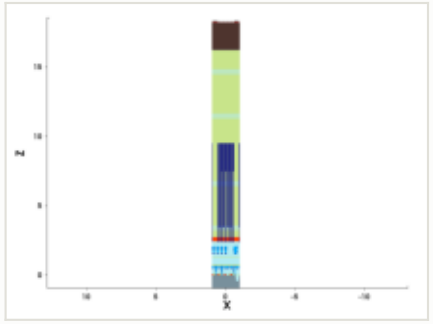

mask for this step

no mask for this step

steps by process area

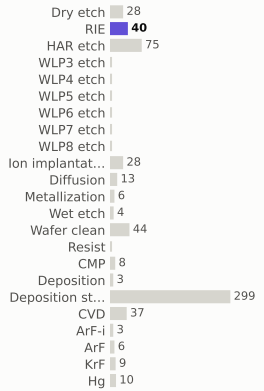

materials deposited (g)

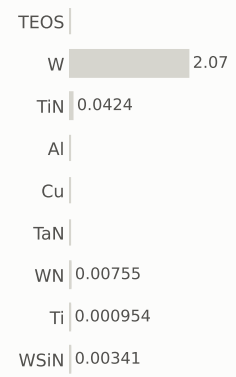

gases emitted (g)

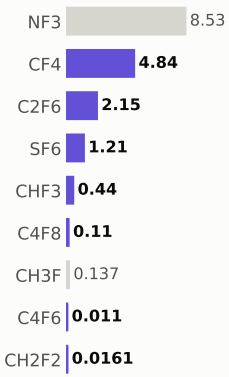

Step #8500: RIE

etch_anisotropic · RIE

1.04	744.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

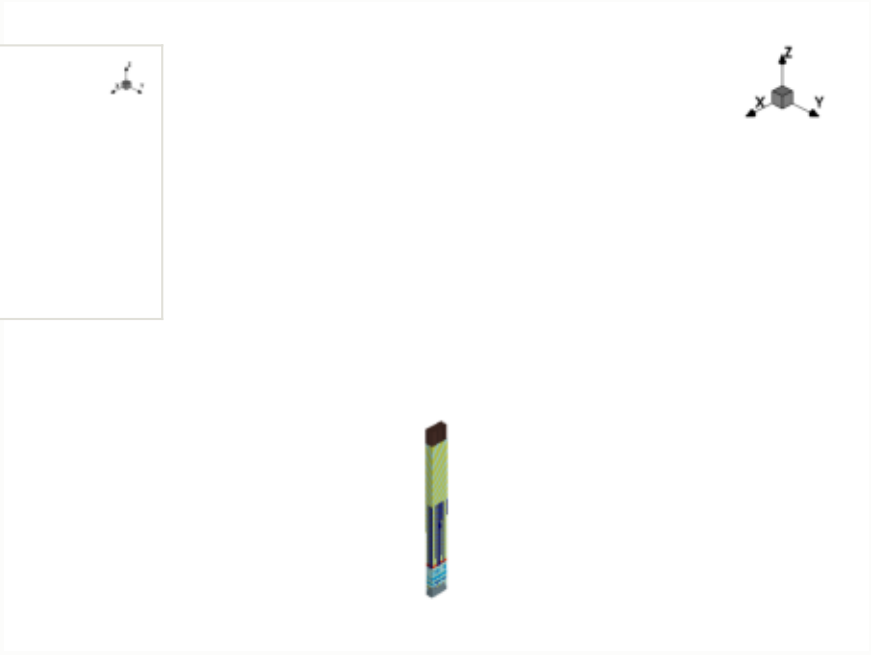

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

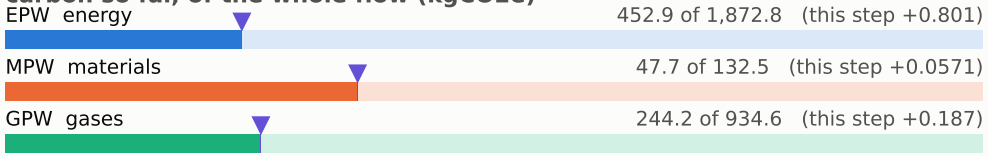

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

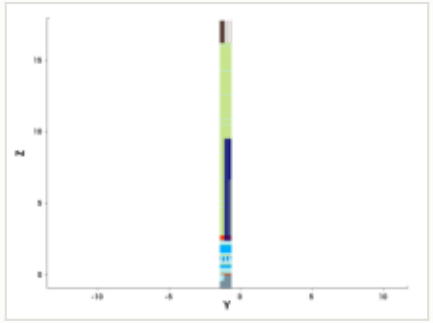

y cut at -1.035 µm

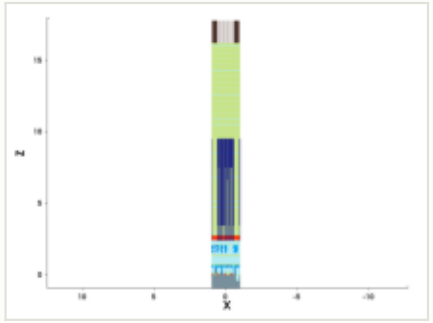

mask for this step

no mask for this step

steps by process area

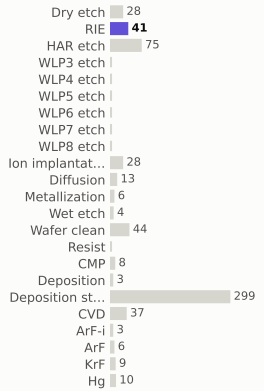

materials deposited (g)

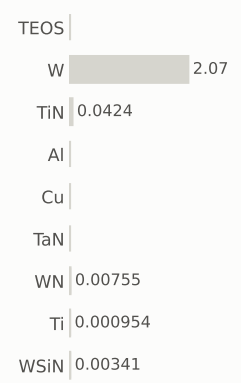

gases emitted (g)

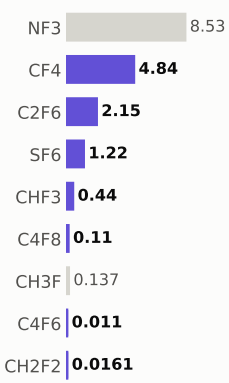

Step #8510: HAR_etch

etch_anisotropic · HAR_etch

1.04	745.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

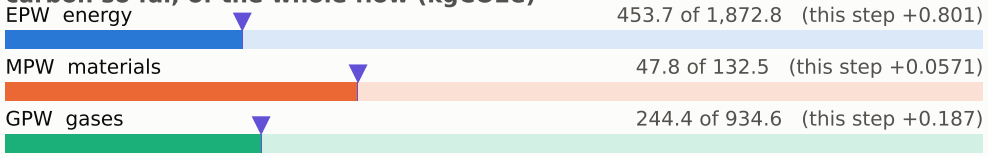

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

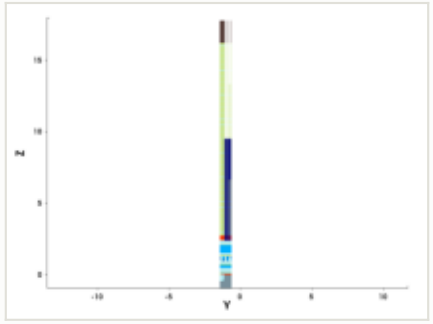

y cut at -1.035 µm

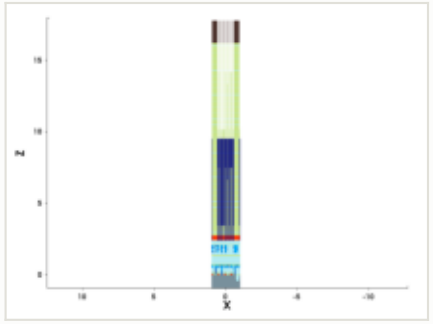

mask for this step

no mask for this step

steps by process area

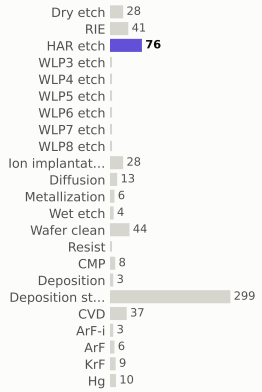

materials deposited (g)

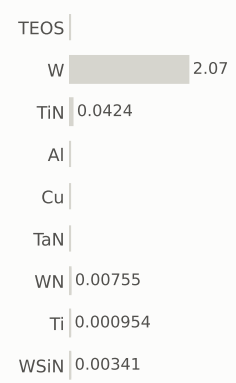

gases emitted (g)

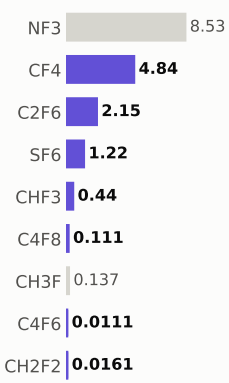

Step #8510.0671: HAR_etch

etch_noop · HAR_etch

1.04	746.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

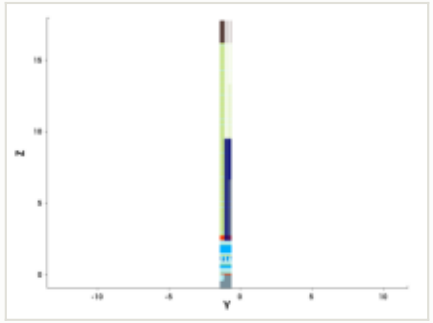

y cut at -1.035 µm

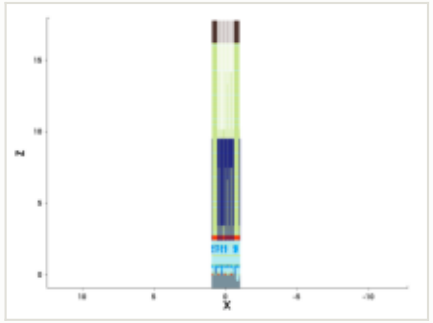

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

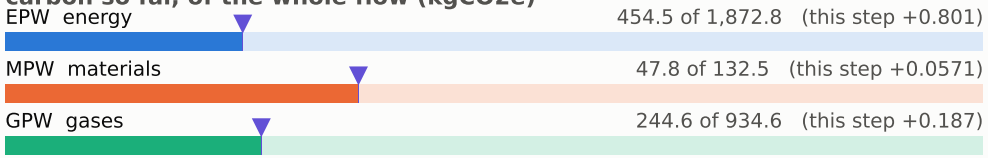

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

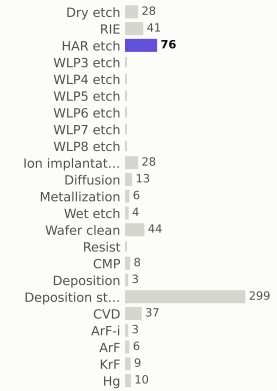

materials deposited (g)

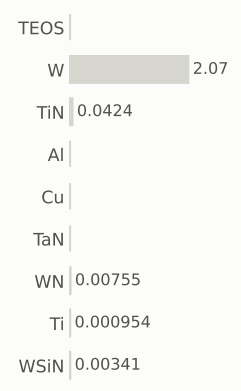

gases emitted (g)

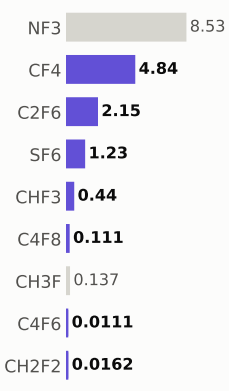

Step #8510.1342: HAR_etch

etch_noop · HAR_etch

1.04	748.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

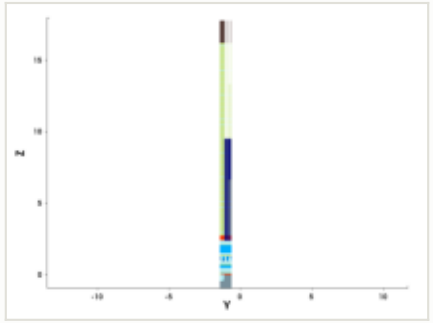

y cut at -1.035 µm

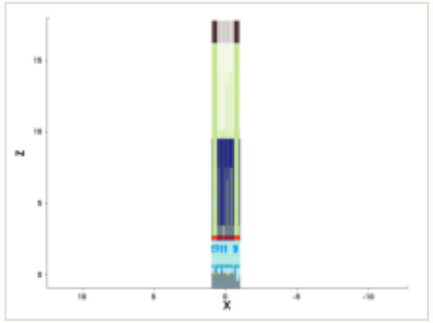

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

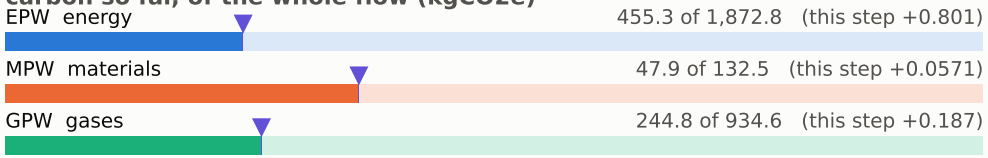

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

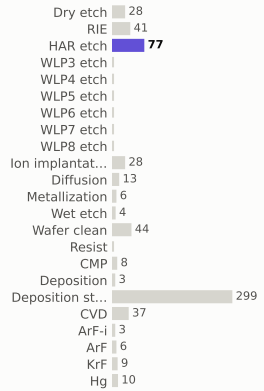

materials deposited (g)

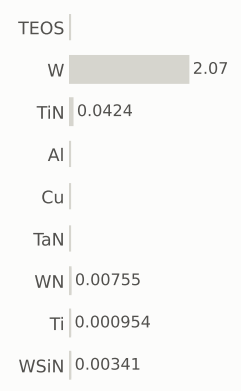

gases emitted (g)

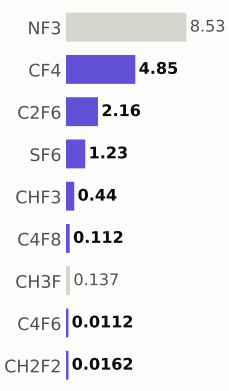

Step #8510.2013: HAR_etch

etch_noop · HAR_etch

1.04	749.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

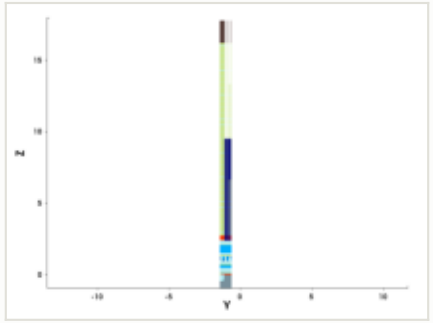

y cut at -1.035 µm

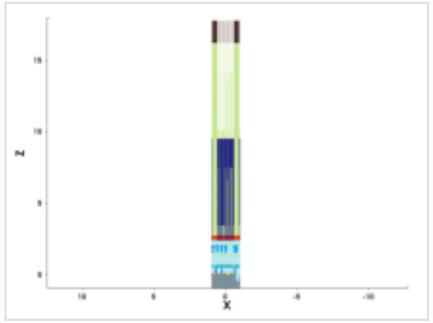

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

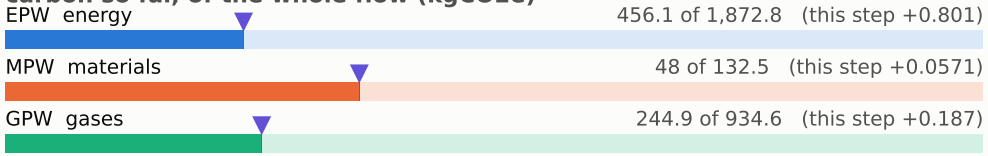

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

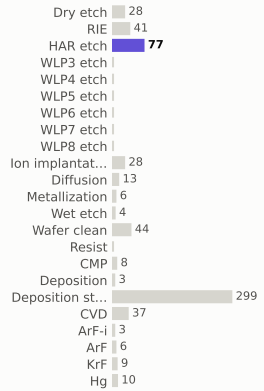

materials deposited (g)

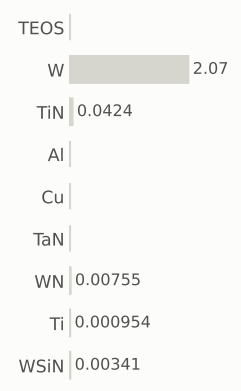

gases emitted (g)

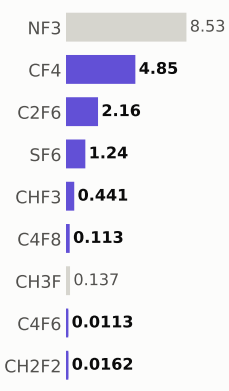

Step #8510.2685: HAR_etch

etch_noop · HAR_etch

1.04	750.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

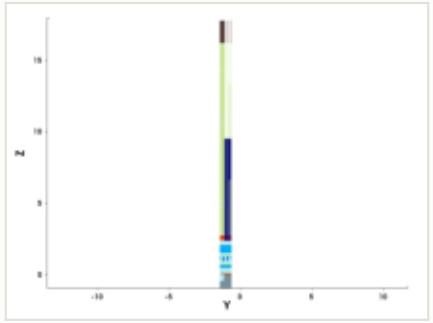

y cut at -1.035 µm

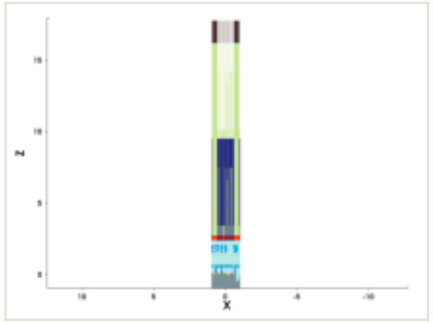

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

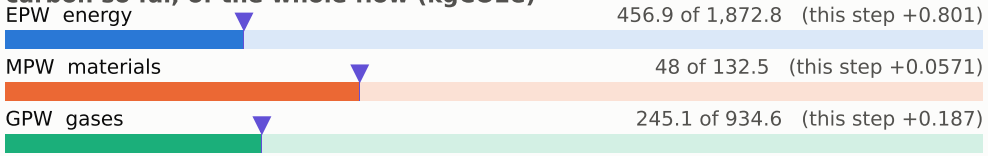

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

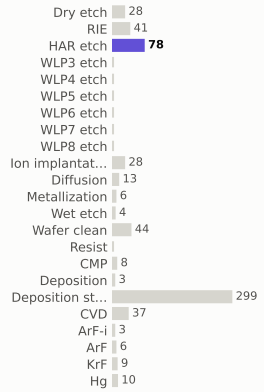

materials deposited (g)

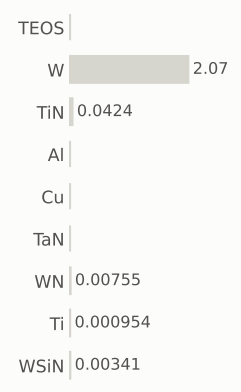

gases emitted (g)

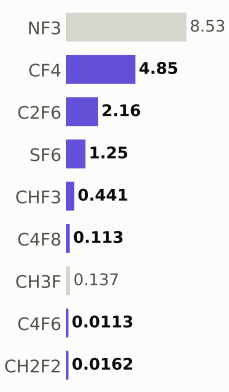

Step #8510.3356: HAR_etch

etch_noop · HAR_etch

1.04	751.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

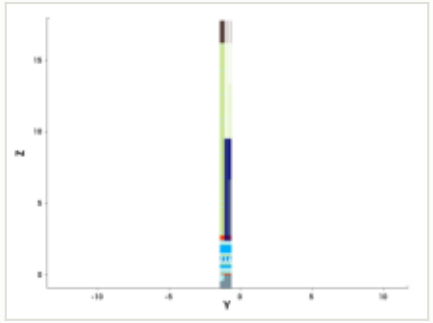

y cut at -1.035 µm

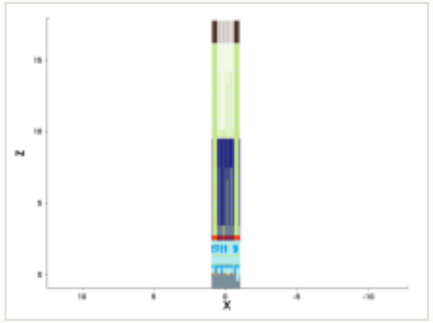

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

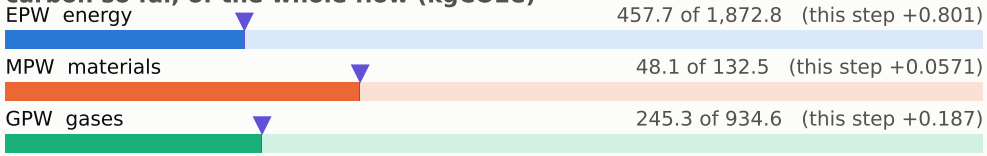

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

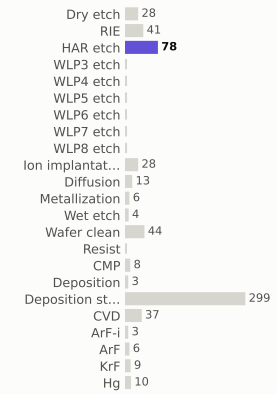

materials deposited (g)

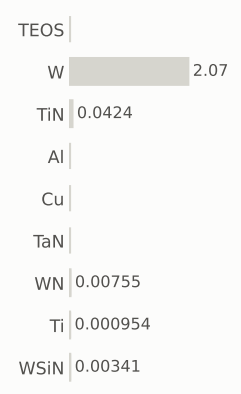

gases emitted (g)

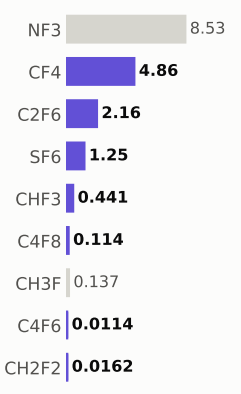

Step #8510.4027: HAR_etch

etch_noop · HAR_etch

1.04	752.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

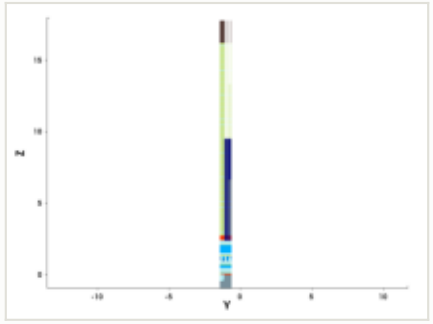

y cut at -1.035 µm

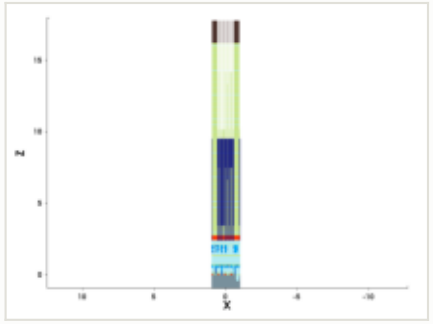

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

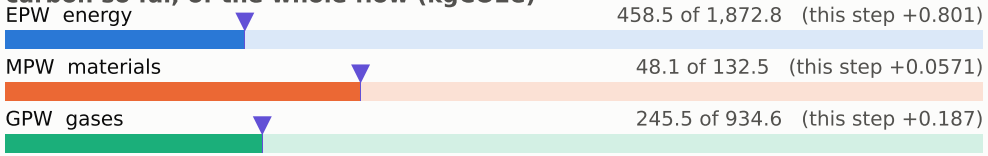

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

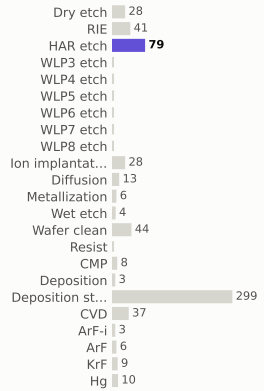

materials deposited (g)

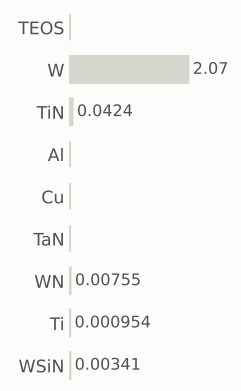

gases emitted (g)

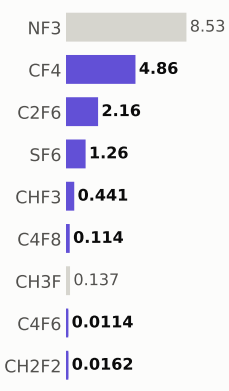

Step #8510.4698: HAR_etch

etch_noop · HAR_etch

1.04	753.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

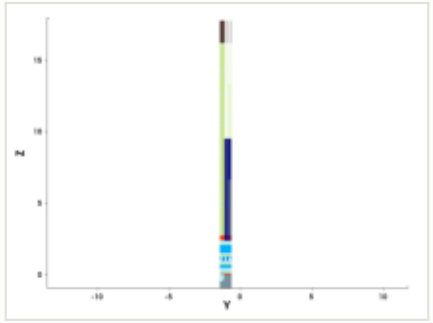

y cut at -1.035 µm

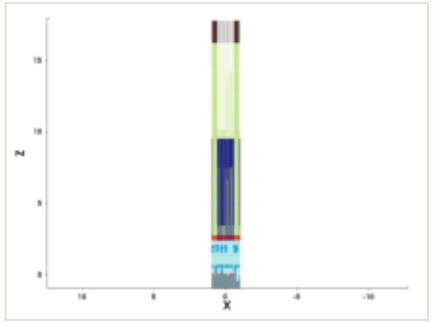

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

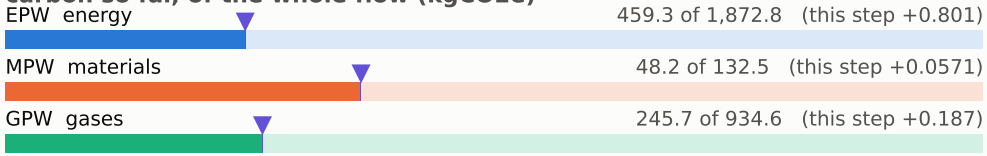

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

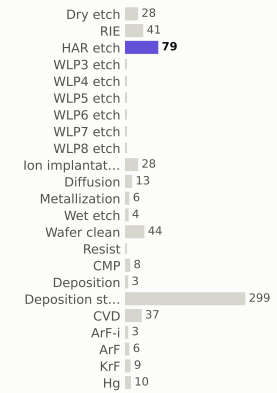

materials deposited (g)

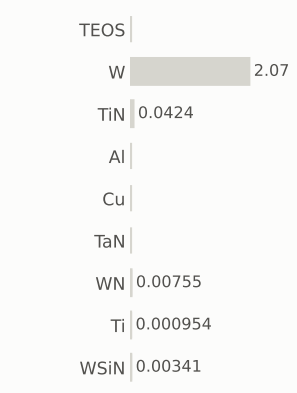

gases emitted (g)

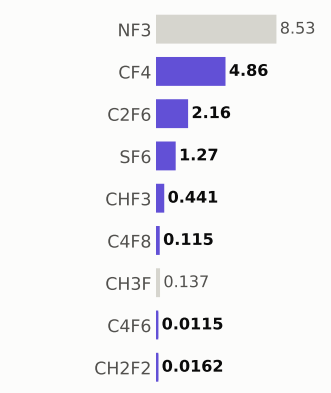

Step #8510.5369: HAR_etch

etch_noop · HAR_etch

1.04	754.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

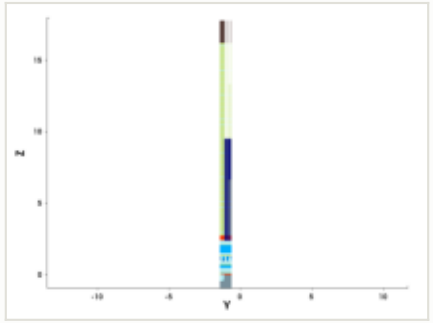

y cut at -1.035 µm

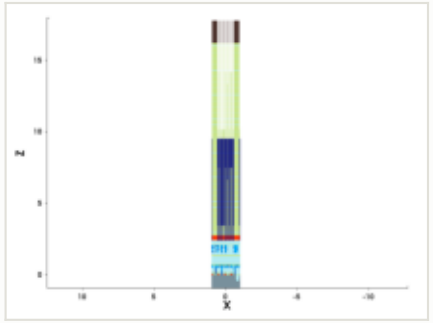

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

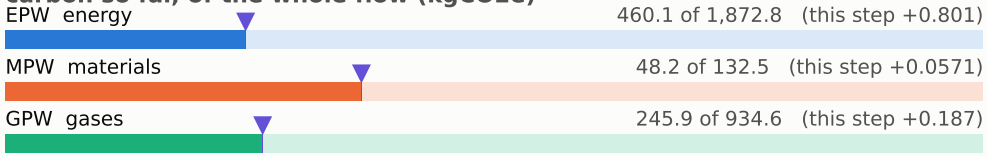

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

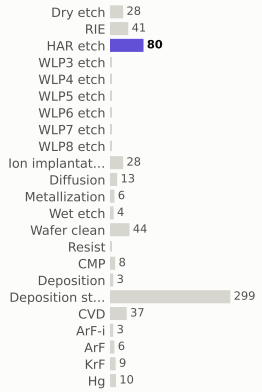

materials deposited (g)

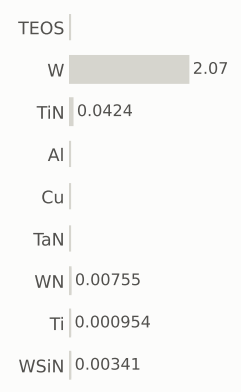

gases emitted (g)

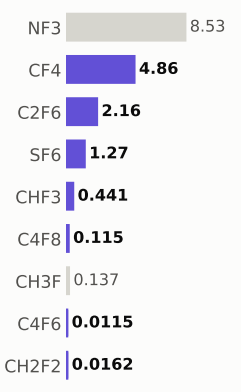

Step #8510.604: HAR_etch

etch_noop · HAR_etch

1.04	755.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

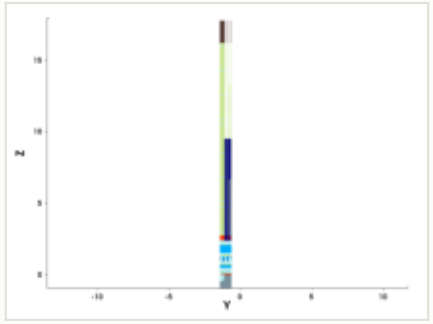

y cut at -1.035 µm

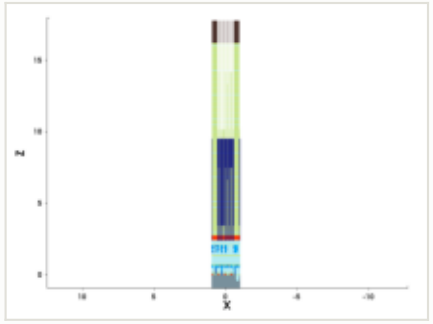

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

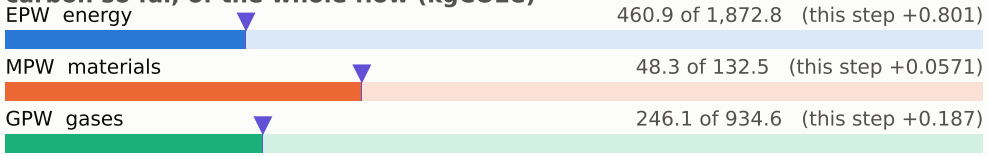

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

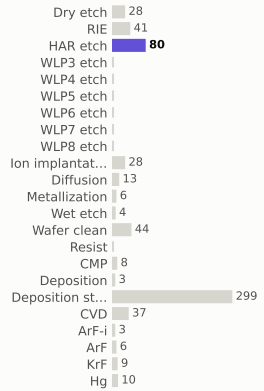

materials deposited (g)

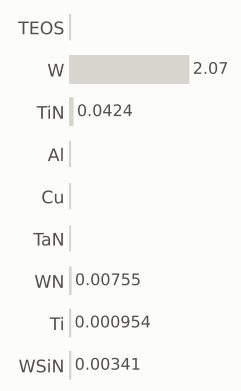

gases emitted (g)

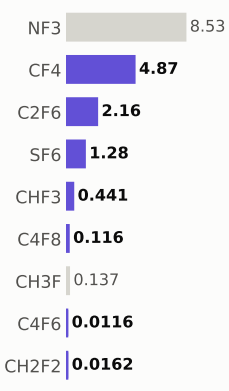

Step #8510.6711: HAR_etch

etch_noop · HAR_etch

1.04	756.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

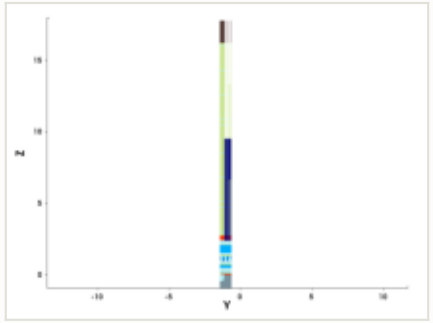

y cut at -1.035 µm

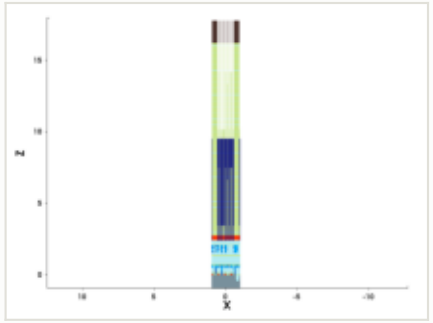

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

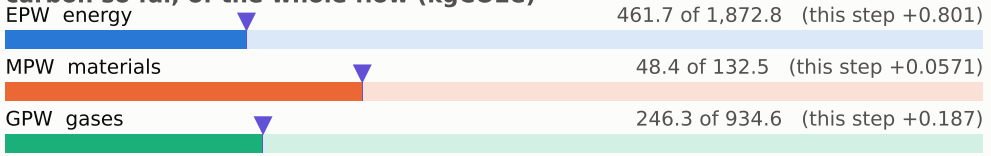

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

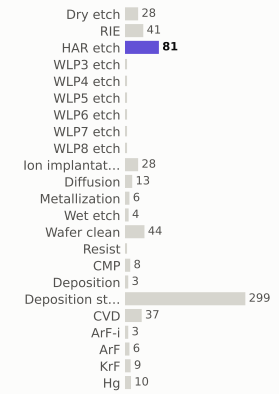

materials deposited (g)

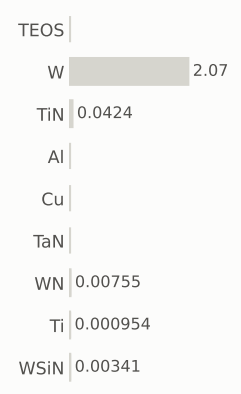

gases emitted (g)

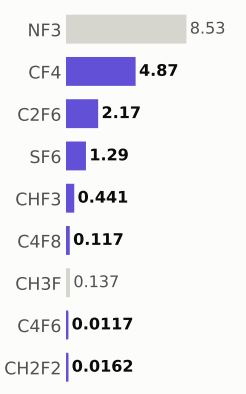

Step #8510.7383: HAR_etch

etch_noop · HAR_etch

1.04	757.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

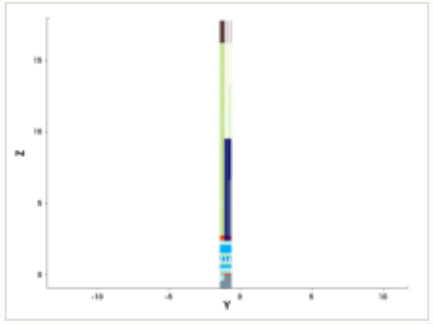

y cut at -1.035 µm

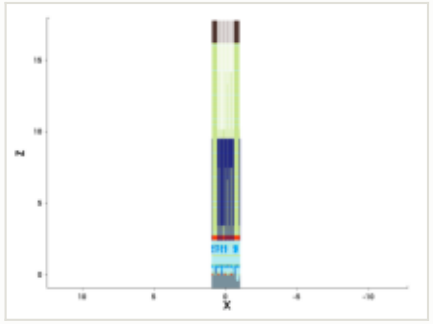

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

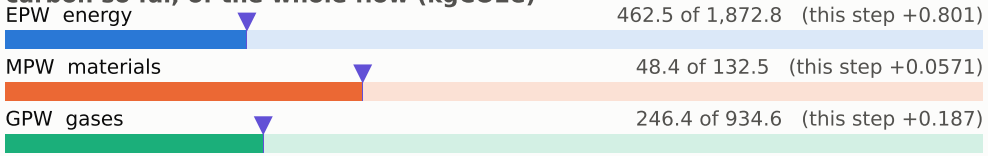

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

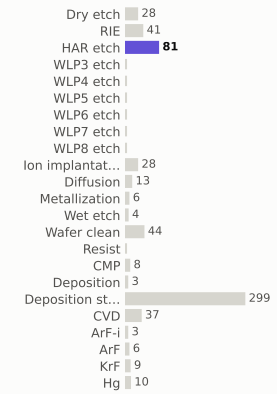

materials deposited (g)



gases emitted (g)



Step #8510.8054: HAR_etch

etch_noop · HAR_etch

1.04	758.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

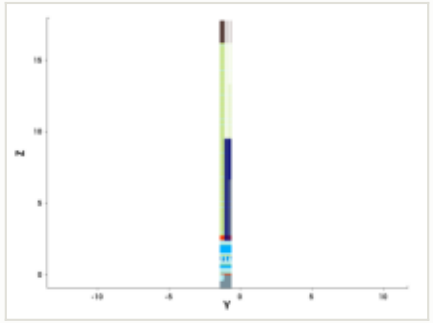

y cut at -1.035 µm

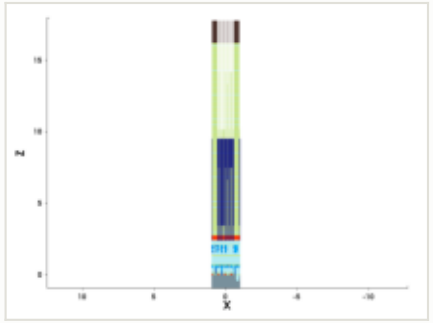

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

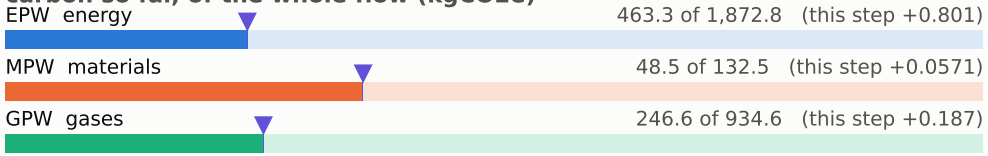

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

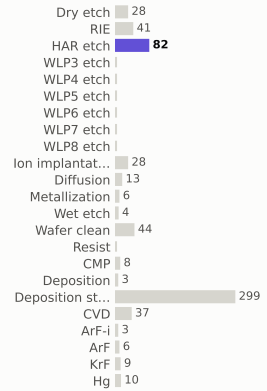

materials deposited (g)

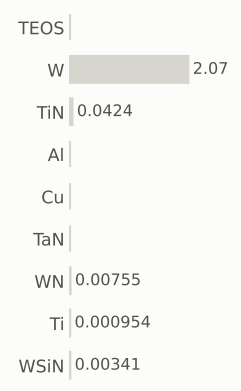

gases emitted (g)

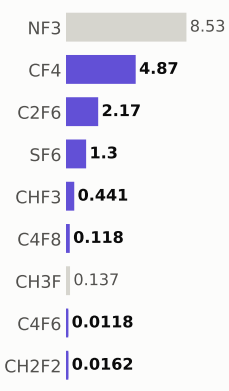

Step #8510.8725: HAR_etch

etch_noop · HAR_etch

1.04	759.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

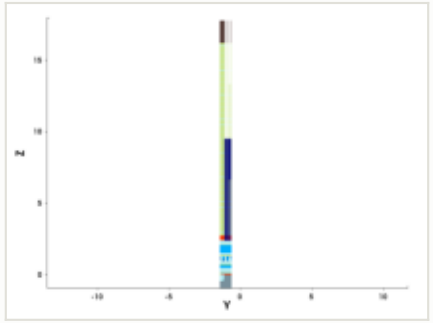

y cut at -1.035 µm

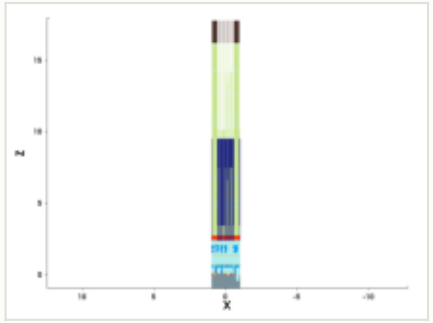

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

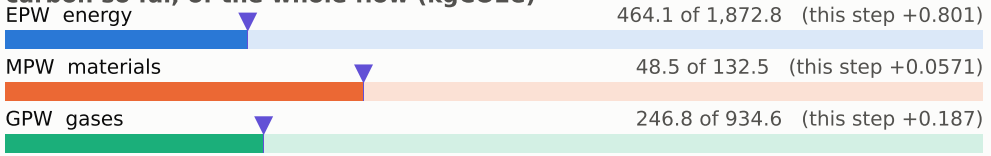

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

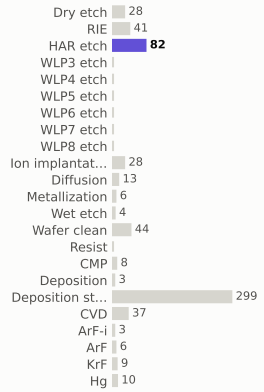

materials deposited (g)

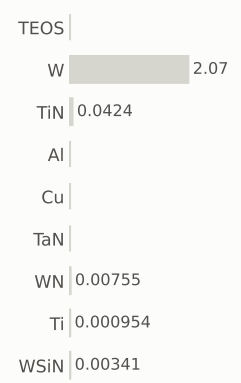

gases emitted (g)

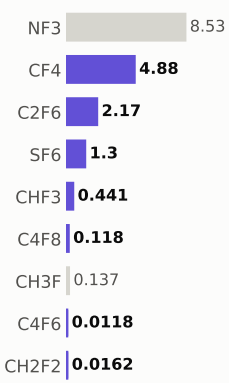

Step #8510.9396: HAR_etch

etch_noop · HAR_etch

1.04	760.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

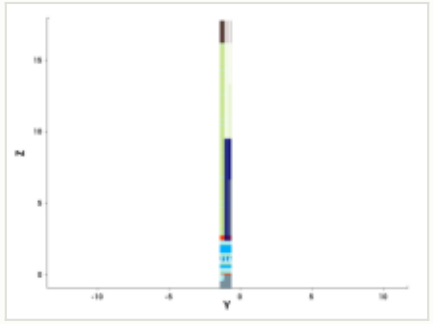

y cut at -1.035 µm

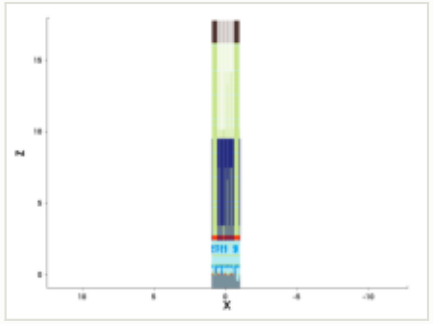

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

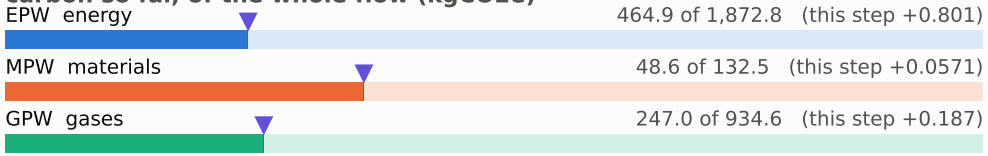

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

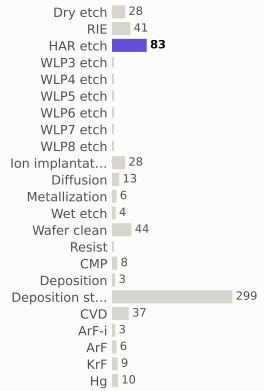

materials deposited (g)

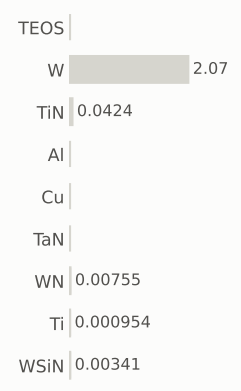

gases emitted (g)

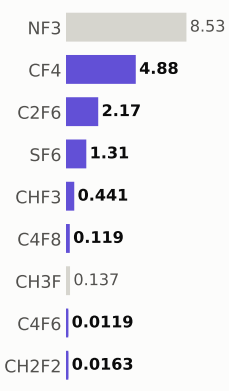

Step #8511.0067: HAR_etch

etch_noop · HAR_etch

1.04	761.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

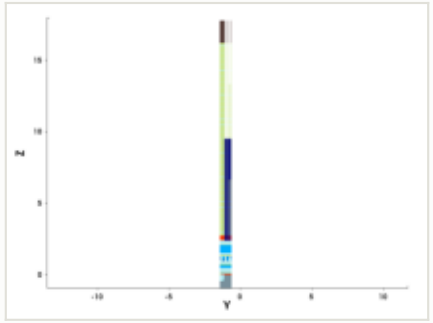

y cut at -1.035 µm

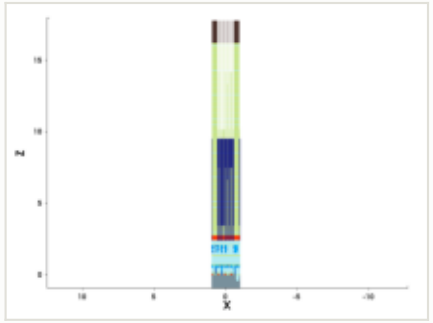

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

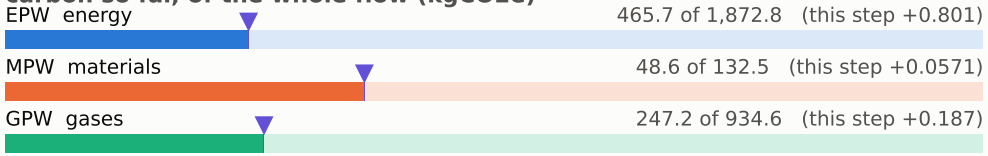

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

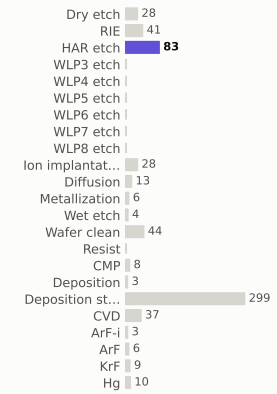

materials deposited (g)

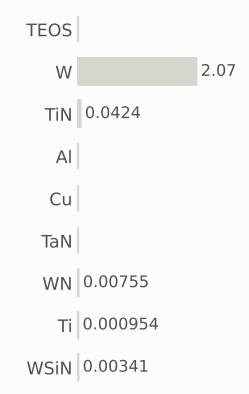

gases emitted (g)

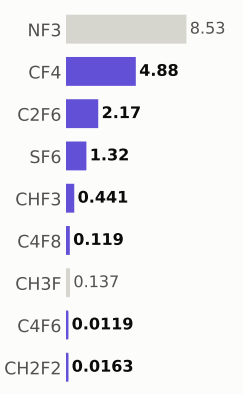

Step #8511.0738: HAR_etch

etch_noop · HAR_etch

1.04	762.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

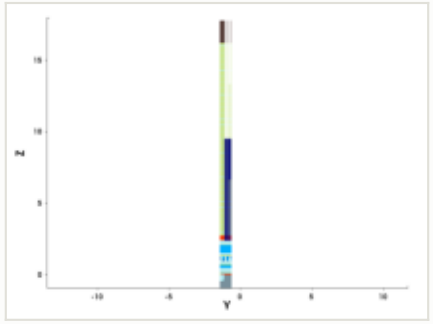

y cut at -1.035 µm

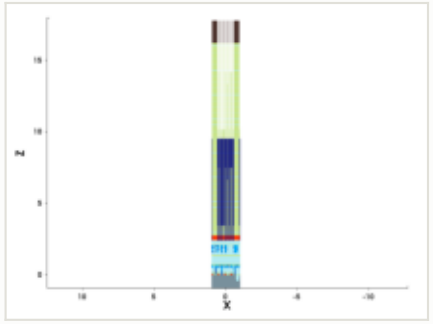

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

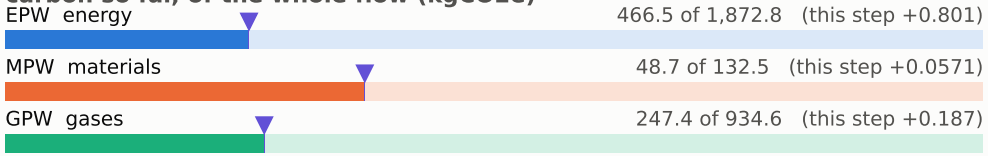

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

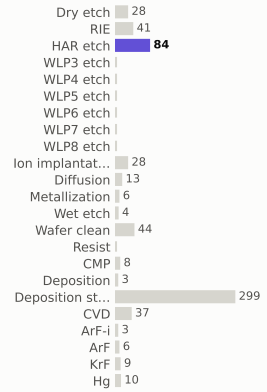

materials deposited (g)

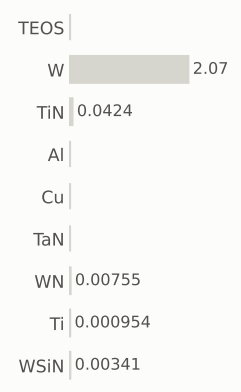

gases emitted (g)

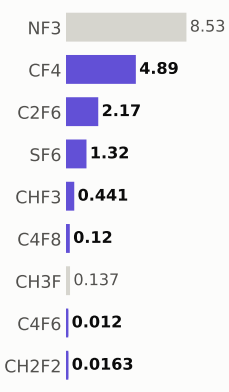

Step #8511.1409: HAR_etch

etch_noop · HAR_etch

1.04	763.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

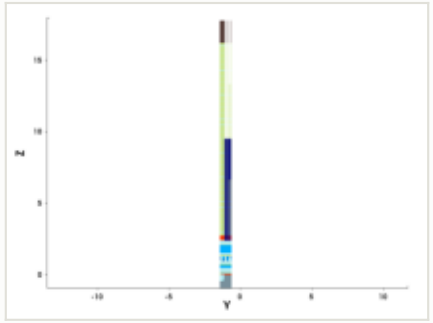

y cut at -1.035 µm

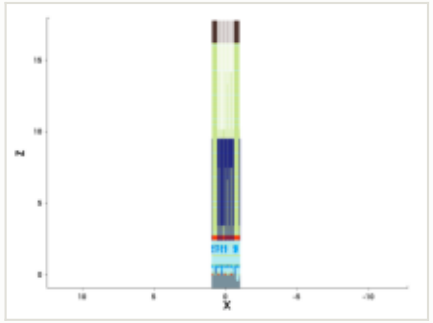

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

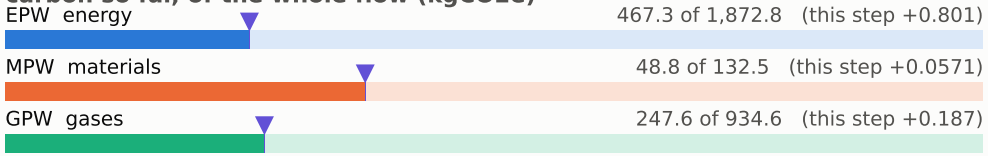

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

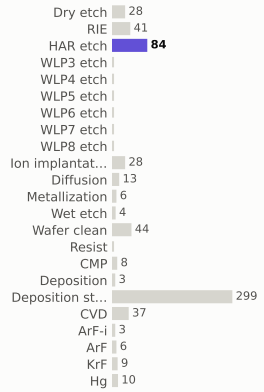

materials deposited (g)

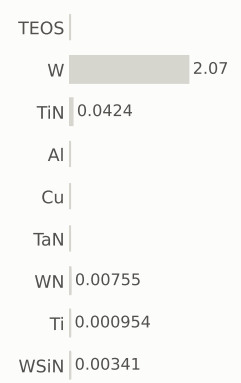

gases emitted (g)

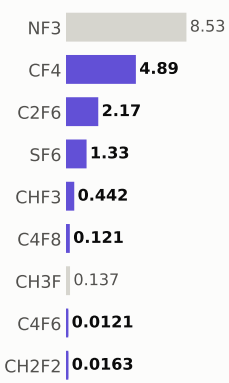

Step #8511.2081: HAR_etch

etch_noop · HAR_etch

1.04	764.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

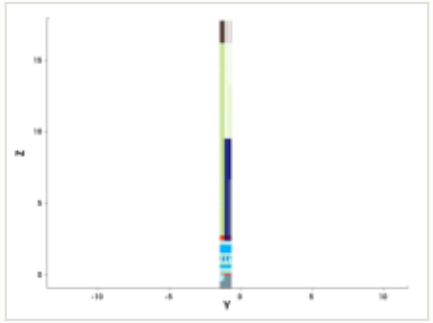

y cut at -1.035 µm

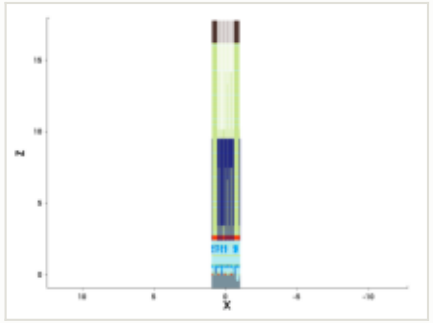

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

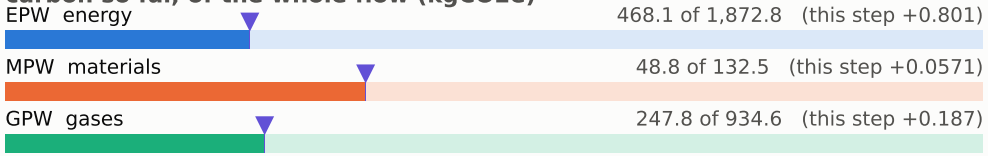

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

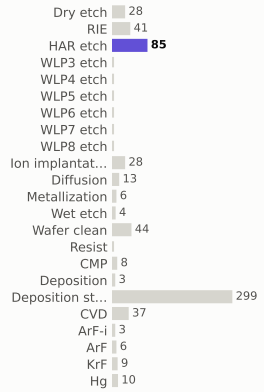

materials deposited (g)

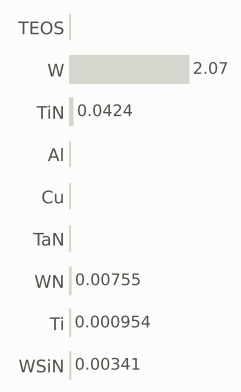

gases emitted (g)

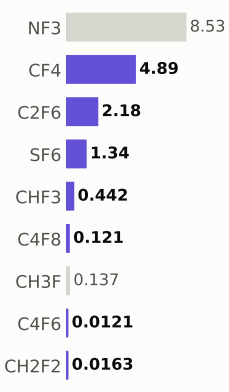

Step #8511.2752: HAR_etch

etch_noop · HAR_etch

1.04	765.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

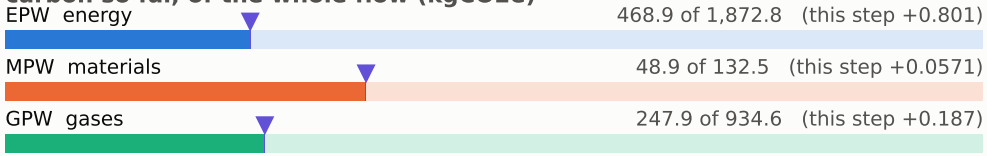

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

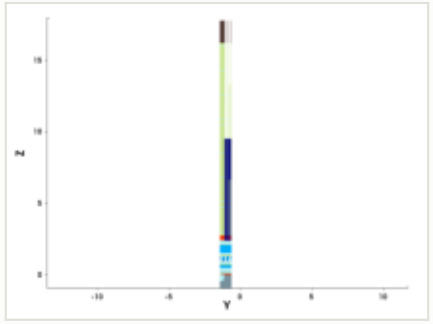

y cut at -1.035 µm

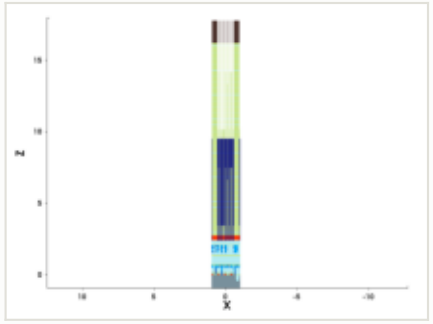

mask for this step

no mask for this step

steps by process area

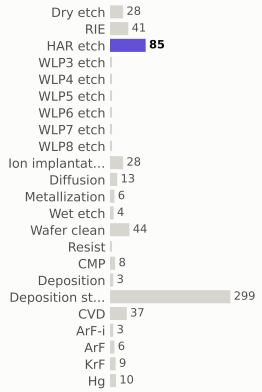

materials deposited (g)

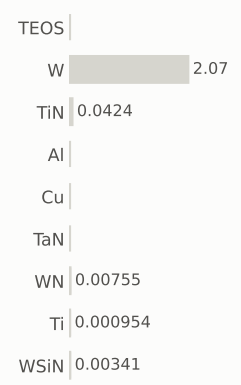

gases emitted (g)

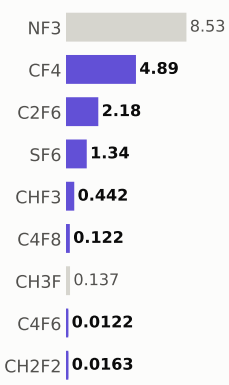

Step #8511.3423: HAR_etch

etch_noop · HAR_etch

1.04	766.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

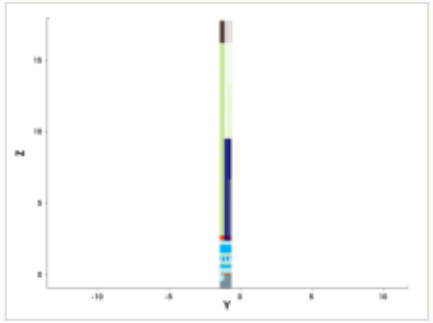

y cut at -1.035 µm

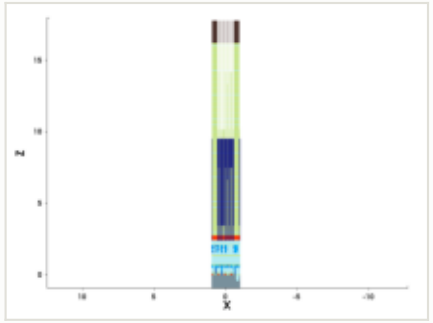

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

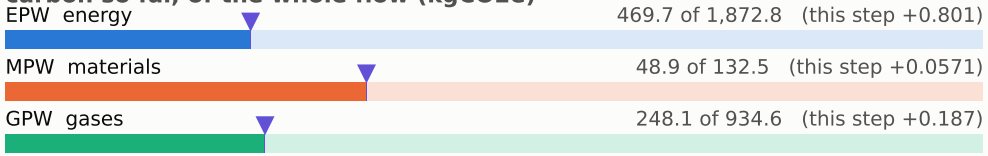

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

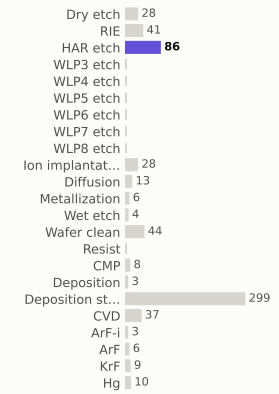

materials deposited (g)

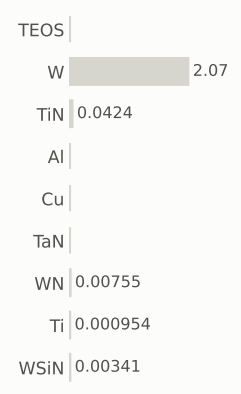

gases emitted (g)

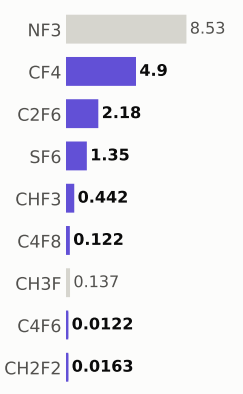

Step #8511.4094: HAR_etch

etch_noop · HAR_etch

1.04	767.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

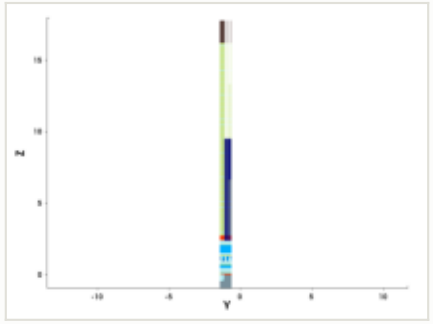

y cut at -1.035 µm

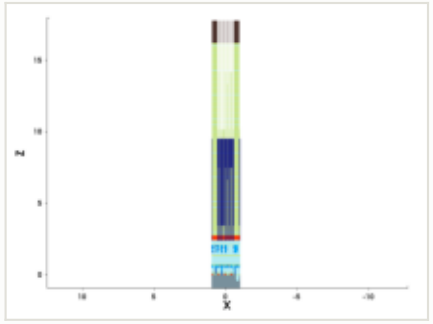

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

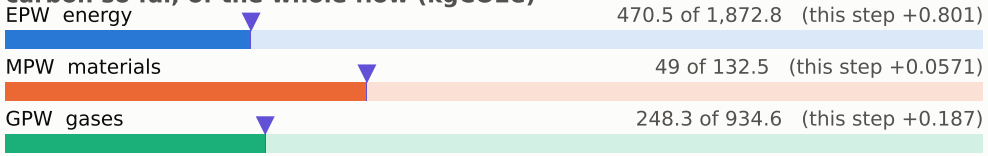

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

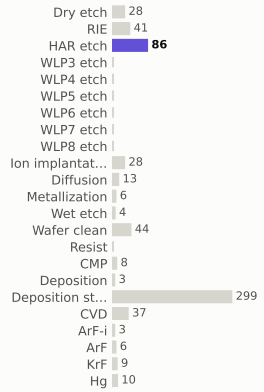

materials deposited (g)

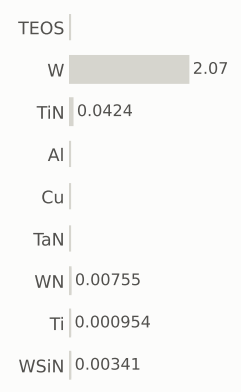

gases emitted (g)

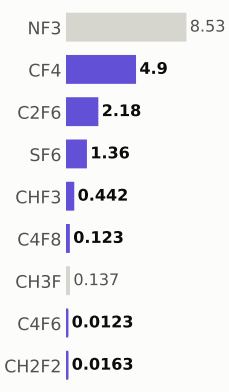

Step #8511.4765: HAR_etch

etch_noop · HAR_etch

1.04	768.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

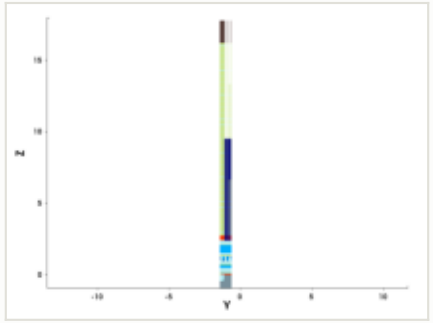

y cut at -1.035 µm

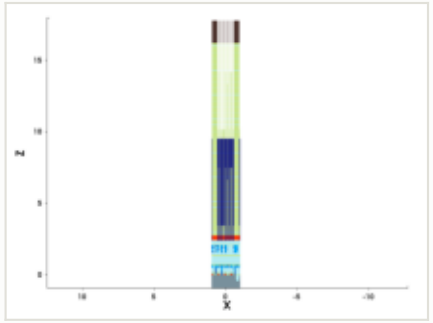

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

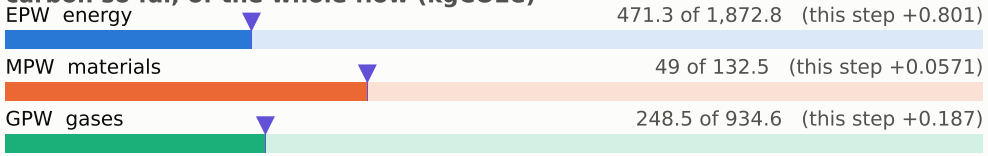

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

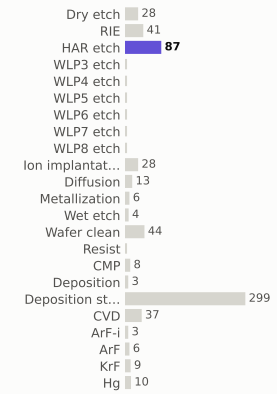

materials deposited (g)



gases emitted (g)



Step #8511.5436: HAR_etch

etch_noop · HAR_etch

1.04	769.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

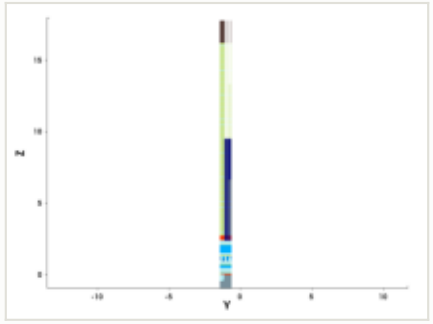

y cut at -1.035 µm

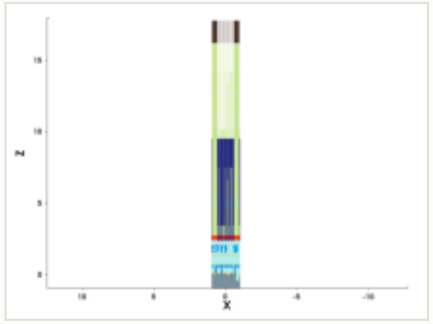

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

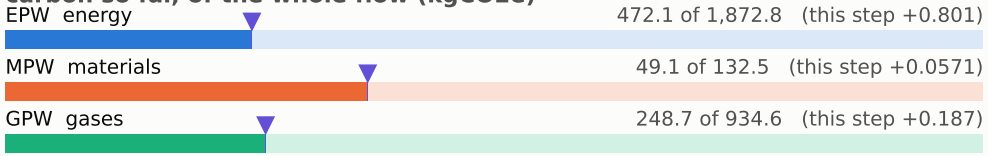

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

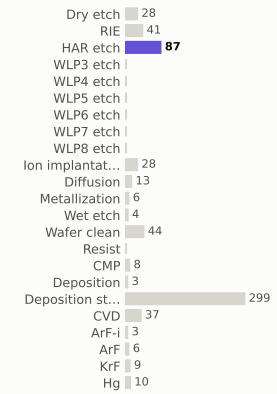

materials deposited (g)



gases emitted (g)



Step #8511.6107: HAR_etch

etch_noop · HAR_etch

1.04	770.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

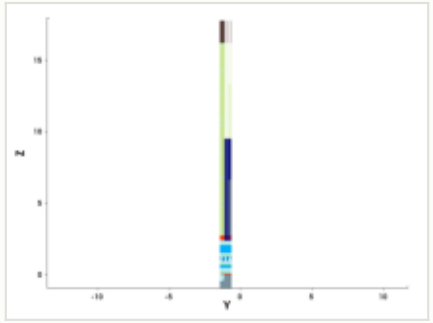

y cut at -1.035 µm

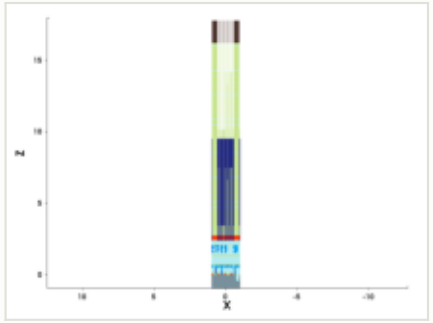

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

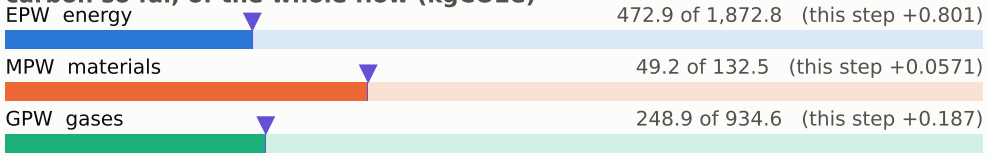

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

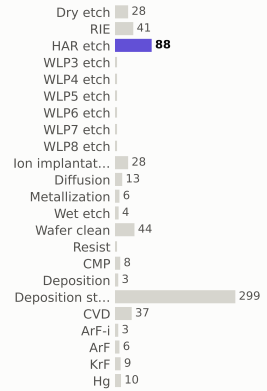

materials deposited (g)

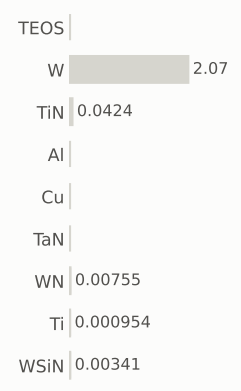

gases emitted (g)

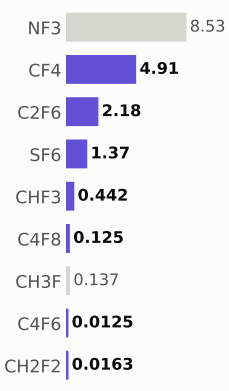

Step #8511.6779: HAR_etch

etch_noop · HAR_etch

1.04	772.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

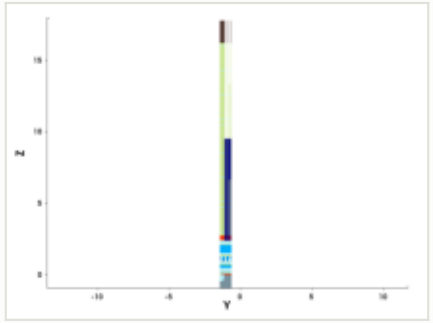

y cut at -1.035 µm

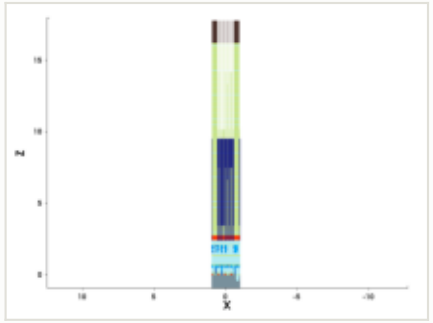

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

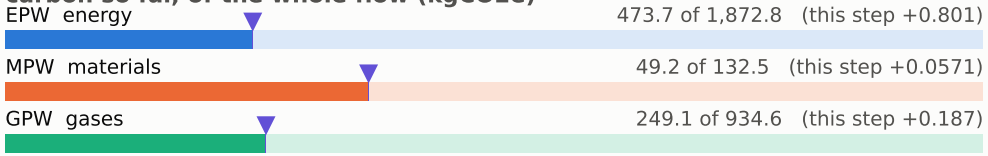

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

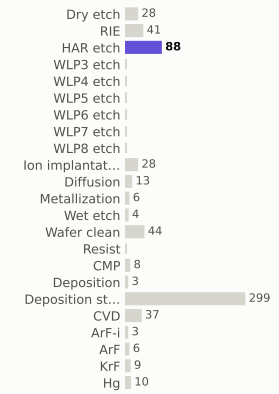

materials deposited (g)



gases emitted (g)



Step #8511.745: HAR_etch

etch_noop · HAR_etch

1.04	773.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

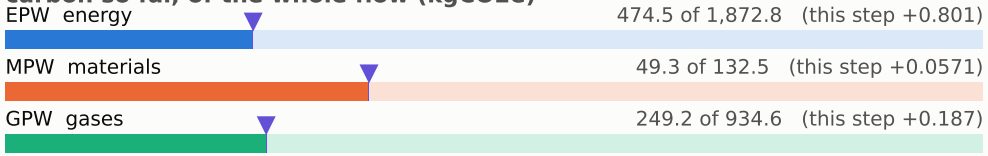

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

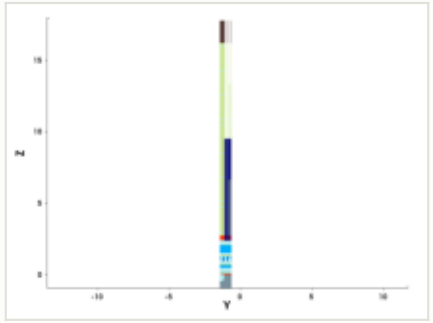

y cut at -1.035 µm

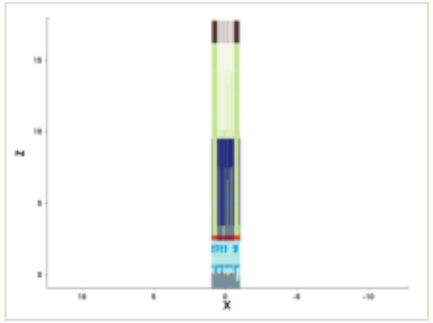

mask for this step

no mask for this step

steps by process area

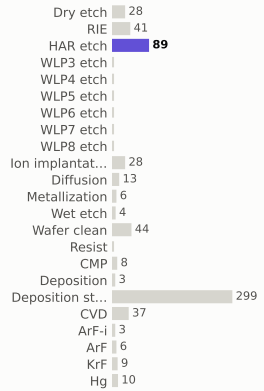

materials deposited (g)

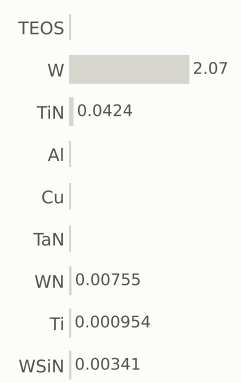

gases emitted (g)

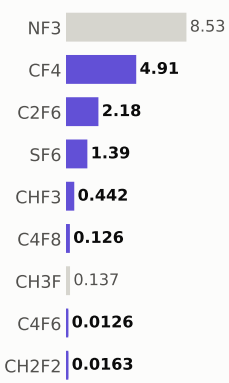

Step #8511.8121: HAR_etch

etch_noop · HAR_etch

1.04	774.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

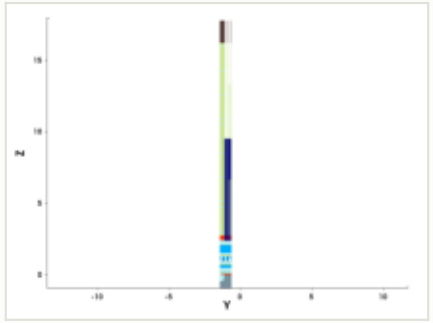

y cut at -1.035 µm

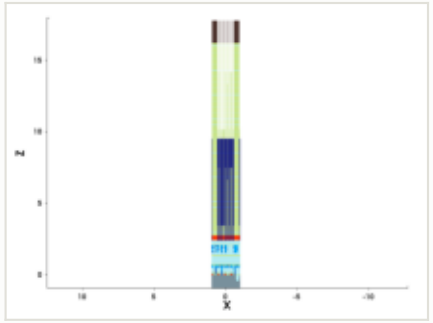

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

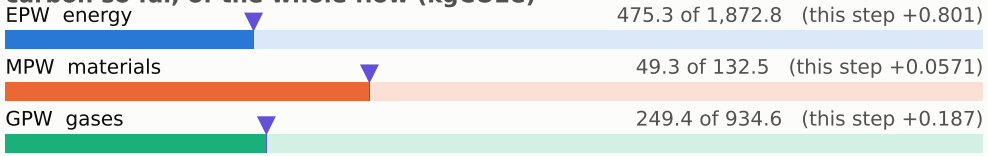

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

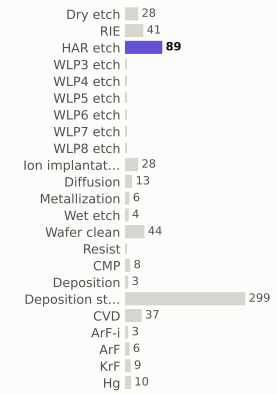

materials deposited (g)



gases emitted (g)

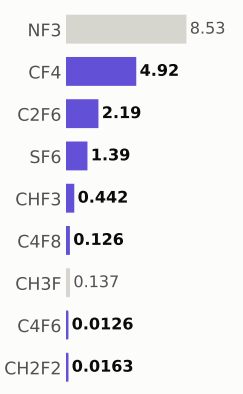

Step #8511.8792: HAR_etch

etch_noop · HAR_etch

1.04	775.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

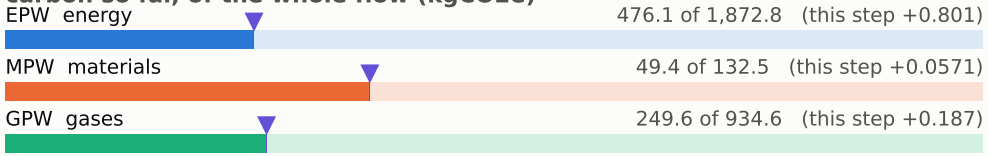

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

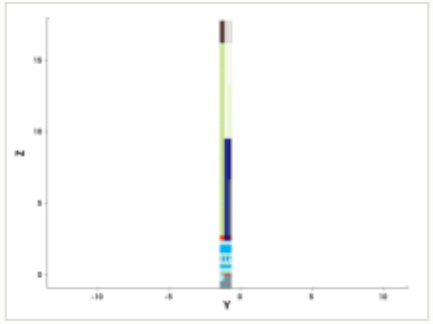

y cut at -1.035 µm

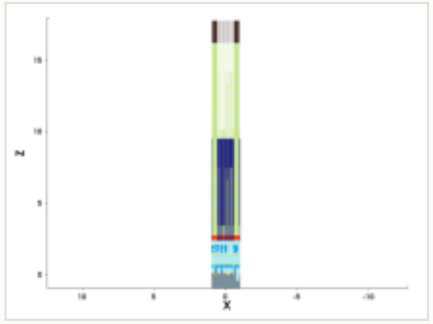

mask for this step

no mask for this step

steps by process area

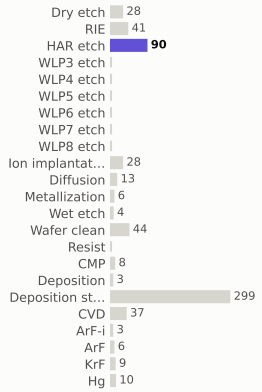

materials deposited (g)

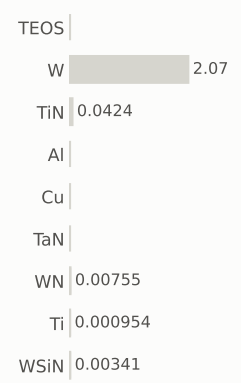

gases emitted (g)

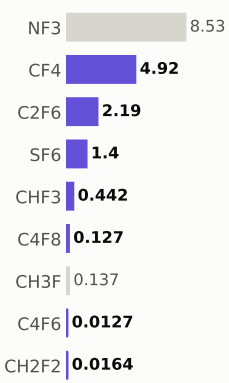

Step #8511.9463: HAR_etch

etch_noop · HAR_etch

1.04	776.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

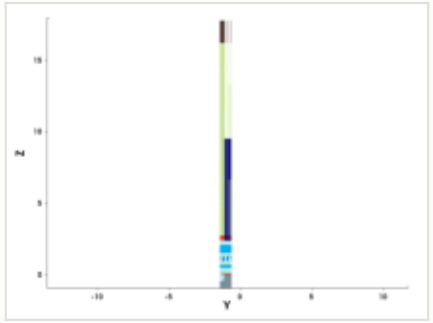

y cut at -1.035 µm

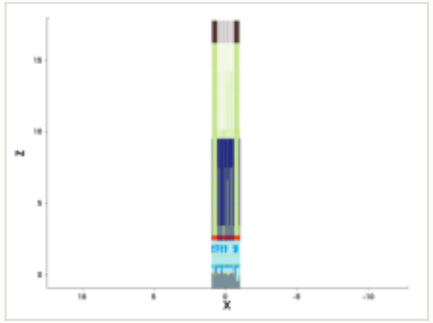

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

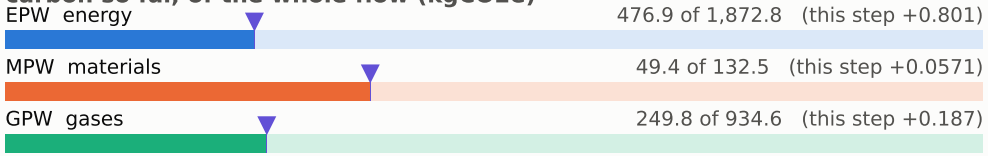

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

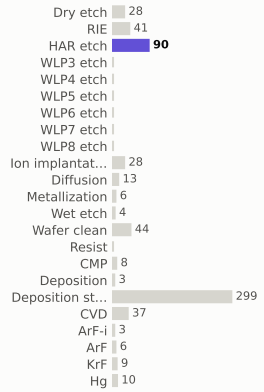

materials deposited (g)

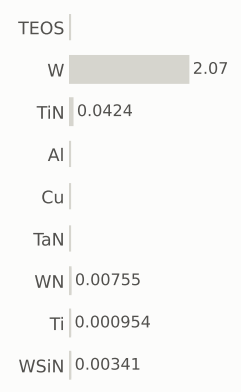

gases emitted (g)

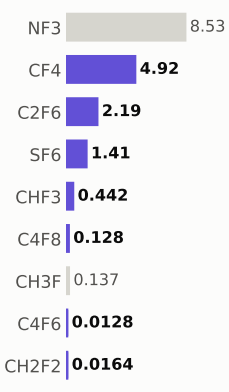

Step #8512.0134: HAR_etch

etch_noop · HAR_etch

1.04	777.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

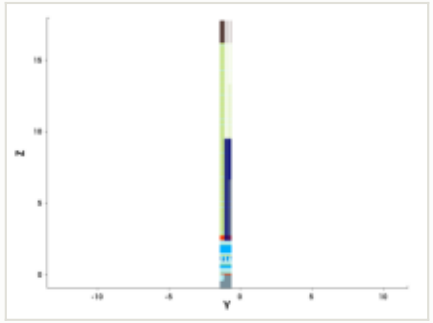

y cut at -1.035 µm

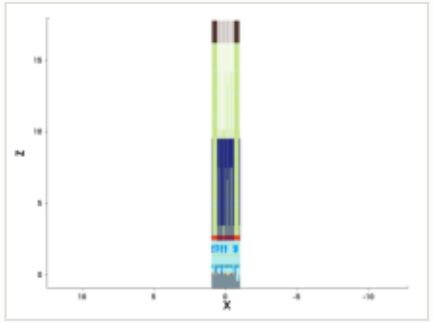

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

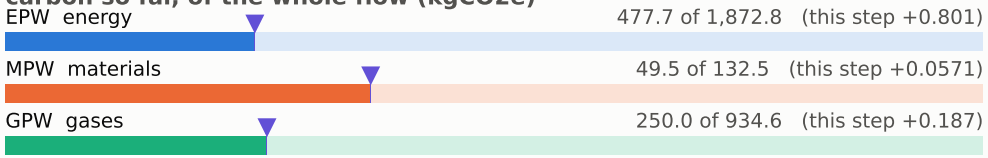

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

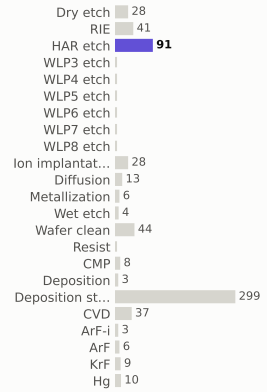

materials deposited (g)

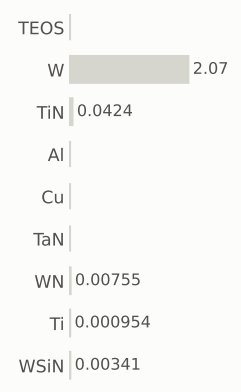

gases emitted (g)

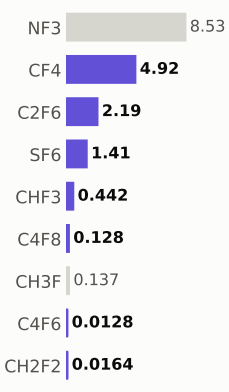

Step #8512.0805: HAR_etch

etch_noop · HAR_etch

1.04	778.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

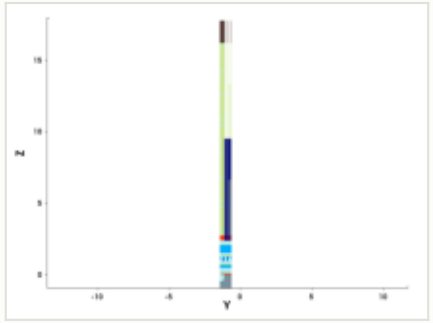

y cut at -1.035 µm

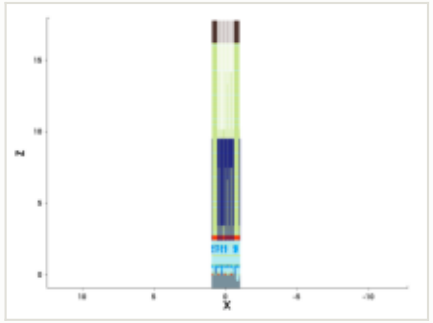

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

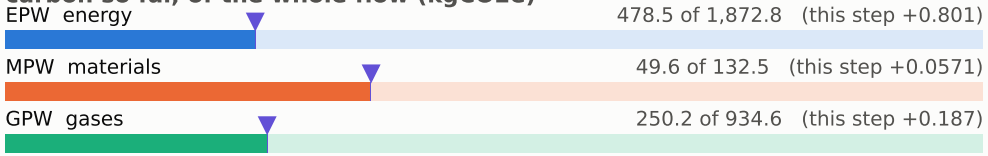

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

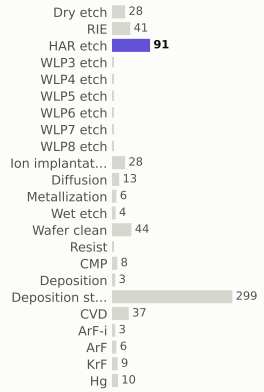

materials deposited (g)

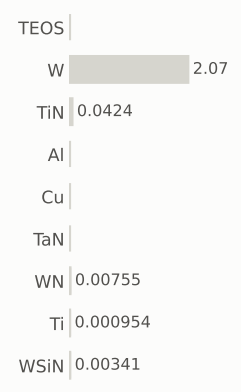

gases emitted (g)

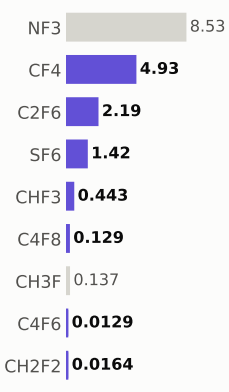

Step #8512.1477: HAR_etch

etch_noop · HAR_etch

1.04	779.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

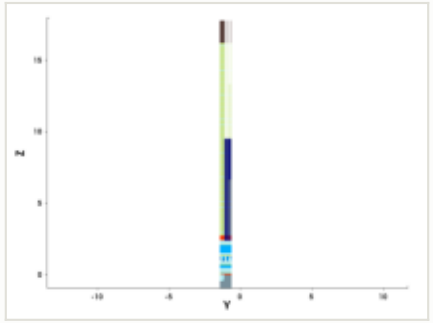

y cut at -1.035 µm

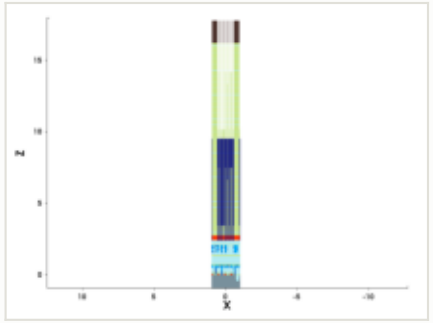

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

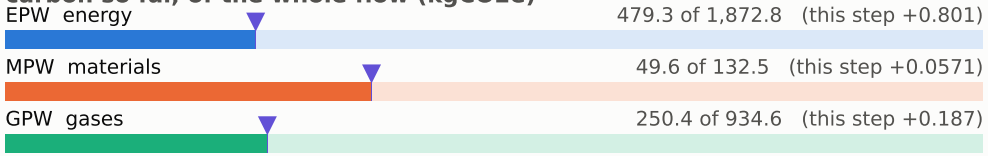

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

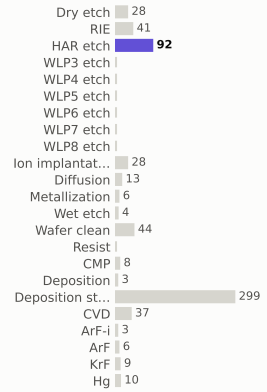

materials deposited (g)

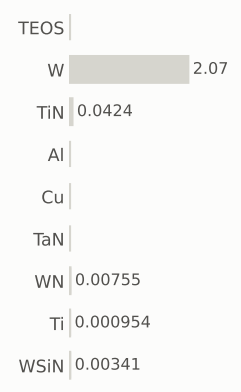

gases emitted (g)

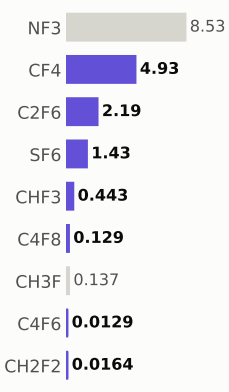

Step #8512.2148: HAR_etch

etch_noop · HAR_etch

1.04	780.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

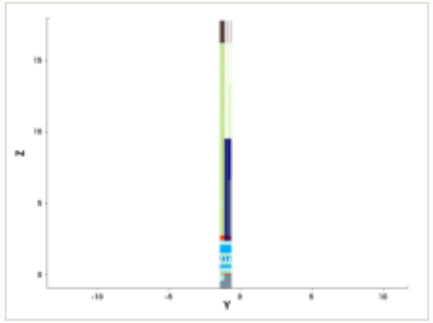

y cut at -1.035 µm

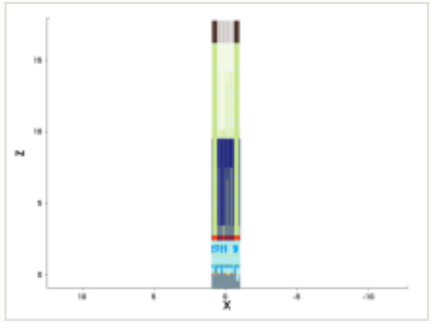

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

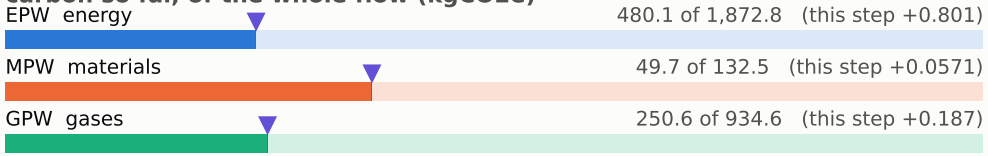

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

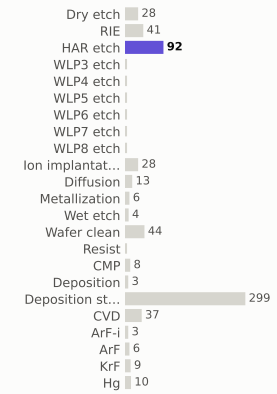

materials deposited (g)



gases emitted (g)



Step #8512.2819: HAR_etch

etch_noop · HAR_etch

1.04	781.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

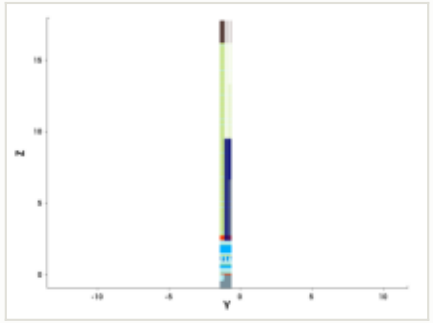

y cut at -1.035 µm

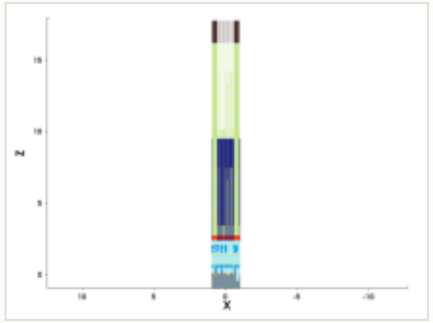

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

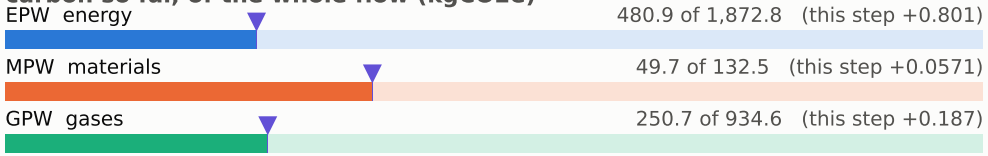

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

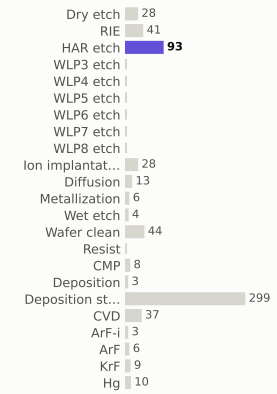

materials deposited (g)



gases emitted (g)

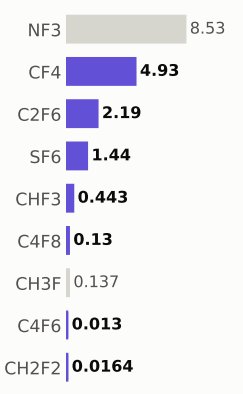

Step #8512.349: HAR_etch

etch_noop · HAR_etch

1.04	782.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

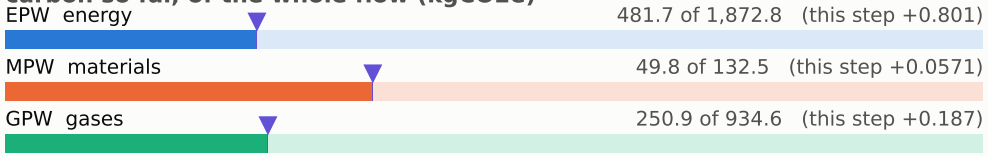

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

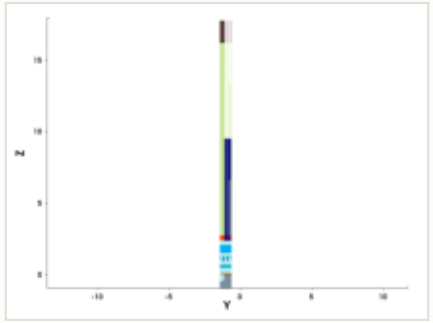

y cut at -1.035 µm

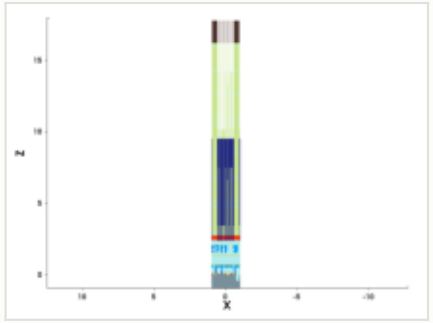

mask for this step

no mask for this step

steps by process area

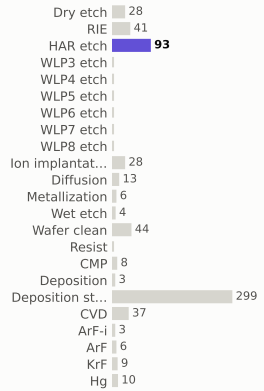

materials deposited (g)

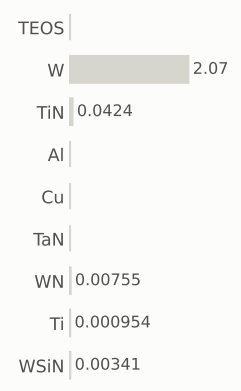

gases emitted (g)

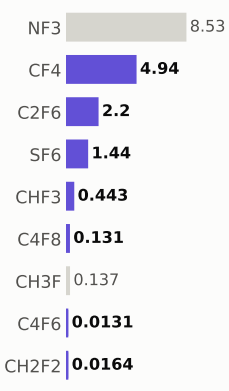

Step #8512.4161: HAR_etch

etch_noop · HAR_etch

1.04	783.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

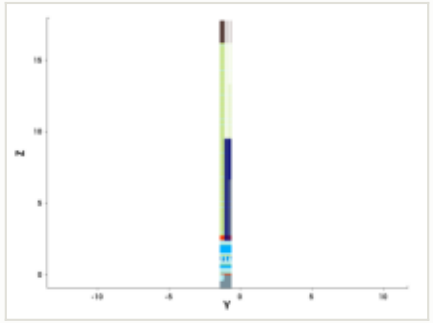

y cut at -1.035 µm

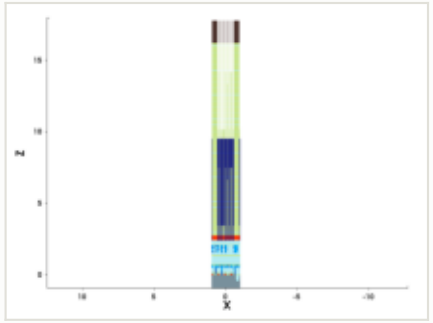

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

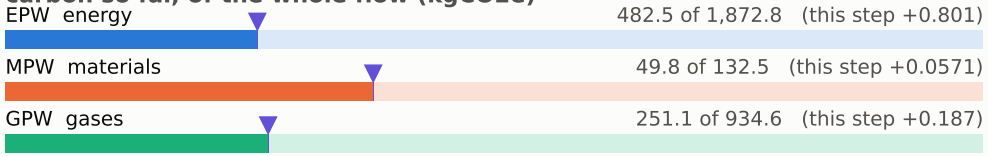

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

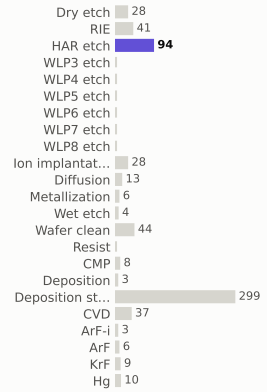

materials deposited (g)

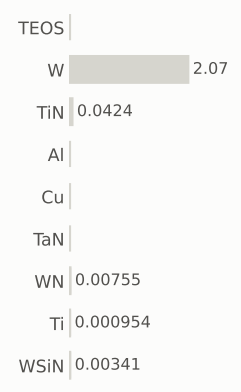

gases emitted (g)

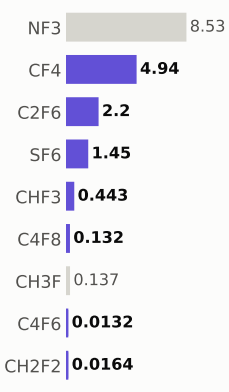

Step #8512.4832: HAR_etch

etch_noop · HAR_etch

1.04	784.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

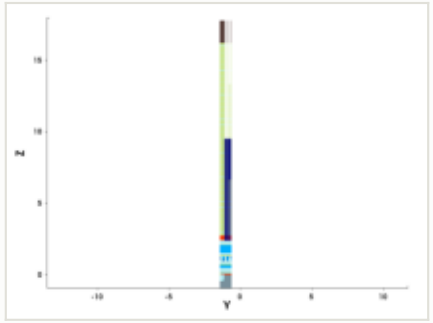

y cut at -1.035 µm

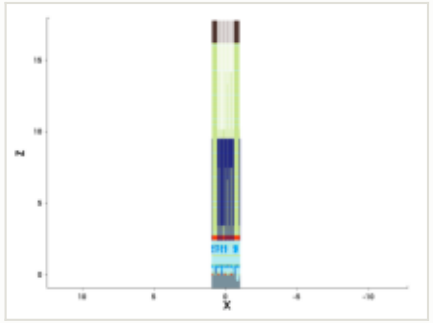

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

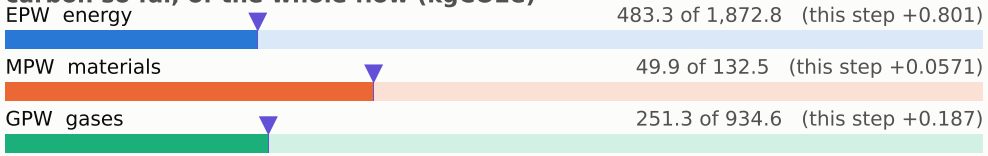

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

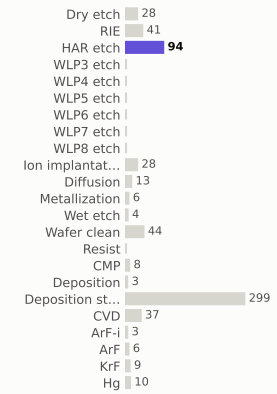

materials deposited (g)



gases emitted (g)

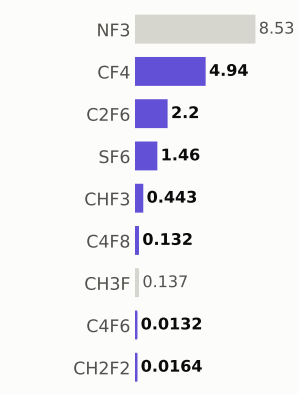

Step #8512.5503: HAR_etch

etch_noop · HAR_etch

1.04	785.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

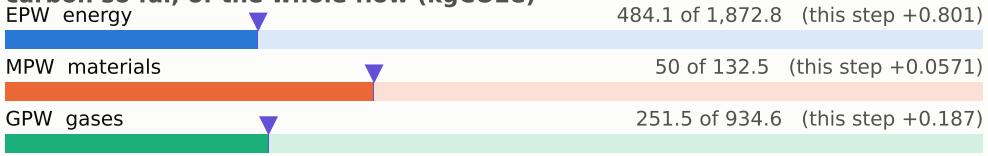

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

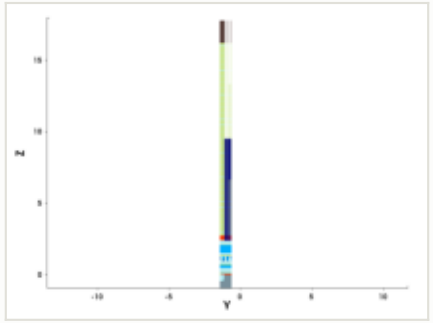

y cut at -1.035 µm

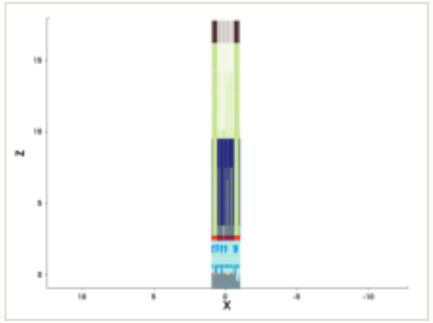

mask for this step

no mask for this step

steps by process area

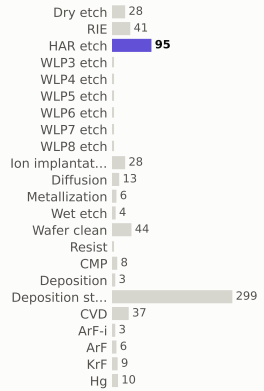

materials deposited (g)

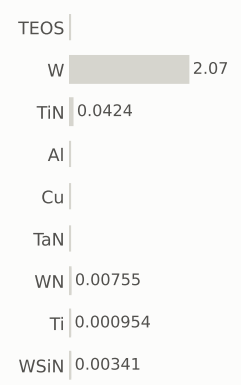

gases emitted (g)

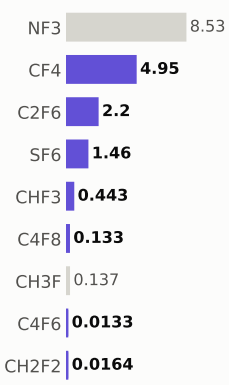

Step #8512.6174: HAR_etch

etch_noop · HAR_etch

1.04	786.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

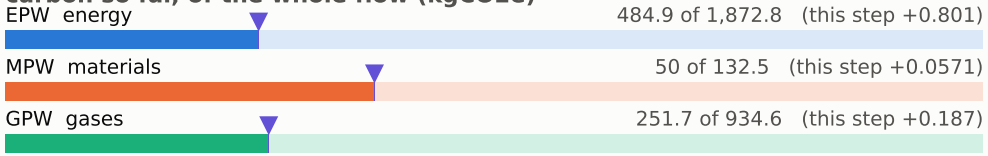

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

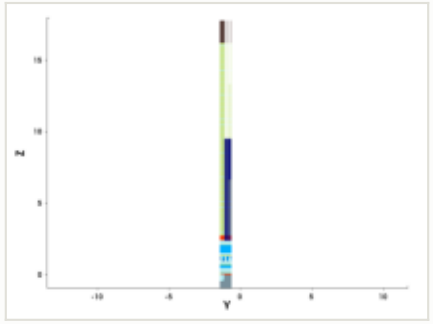

y cut at -1.035 µm

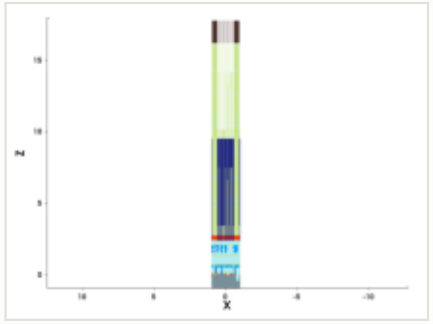

mask for this step

no mask for this step

steps by process area

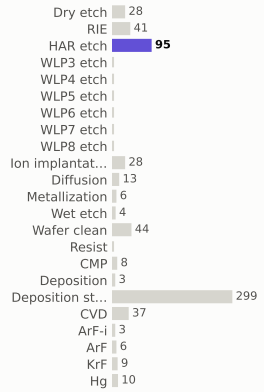

materials deposited (g)

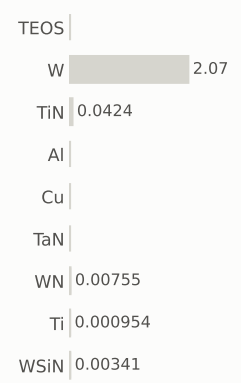

gases emitted (g)

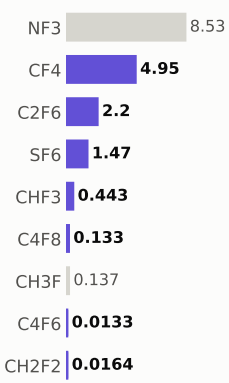

Step #8512.6846: HAR_etch

etch_noop · HAR_etch

1.04	787.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

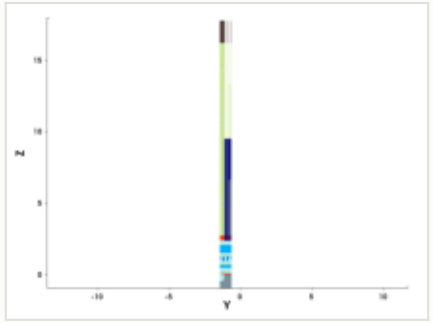

y cut at -1.035 µm

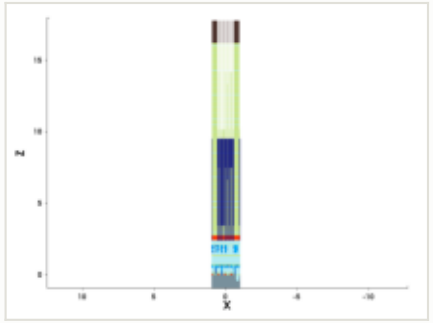

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

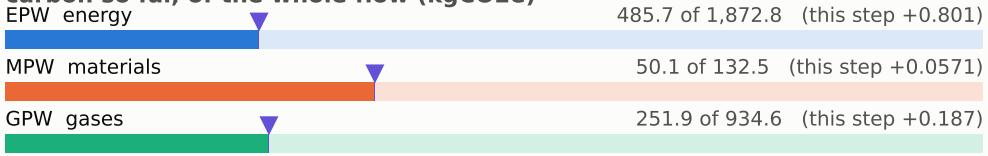

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

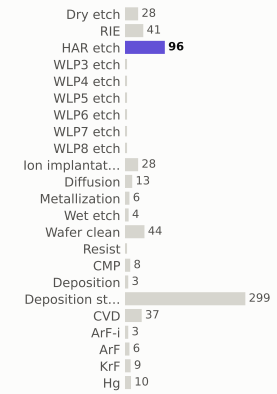

materials deposited (g)

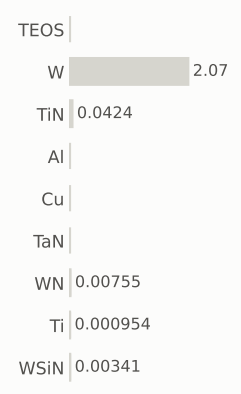

gases emitted (g)

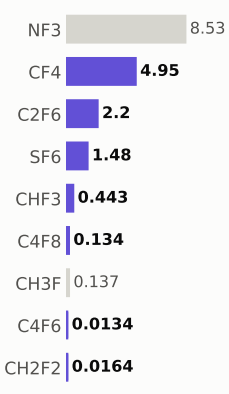

Step #8512.7517: HAR_etch

etch_noop · HAR_etch

1.04	788.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

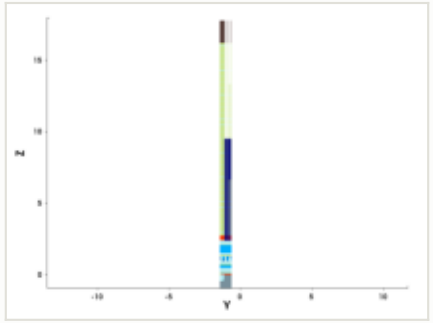

y cut at -1.035 µm

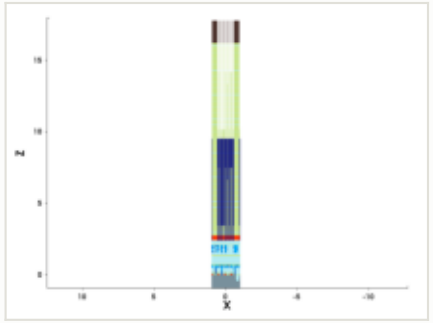

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

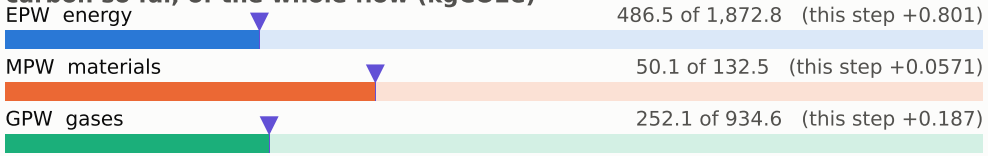

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

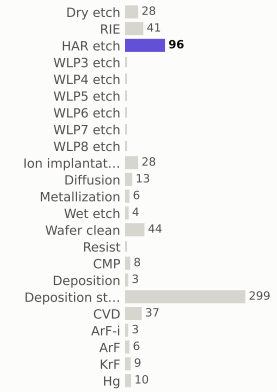

materials deposited (g)

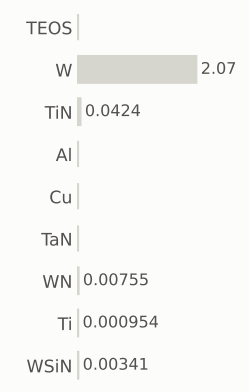

gases emitted (g)

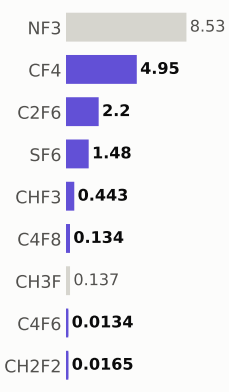

Step #8512.8188: HAR_etch

etch_noop · HAR_etch

1.04	789.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

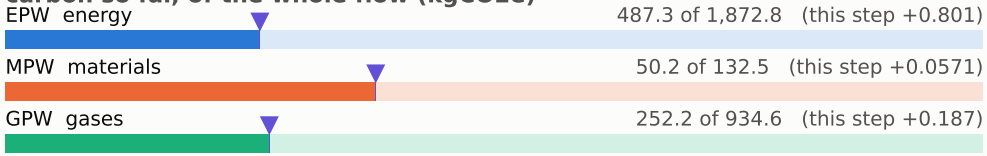

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

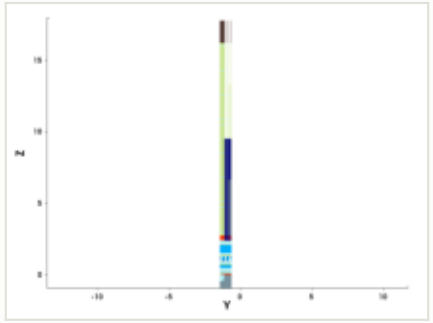

y cut at -1.035 µm

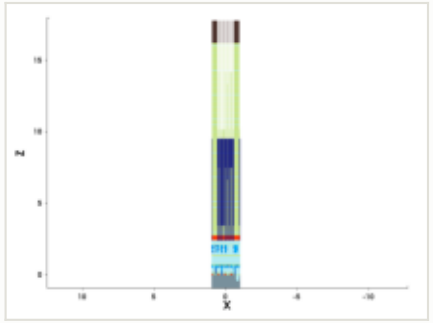

mask for this step

no mask for this step

steps by process area

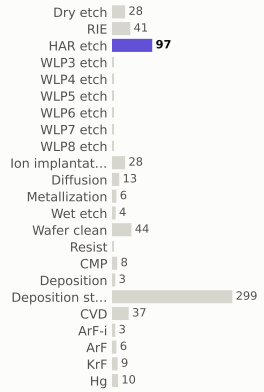

materials deposited (g)

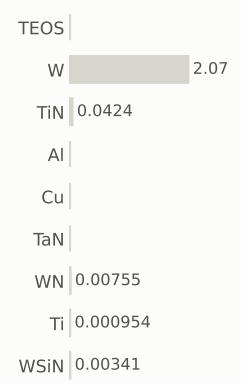

gases emitted (g)

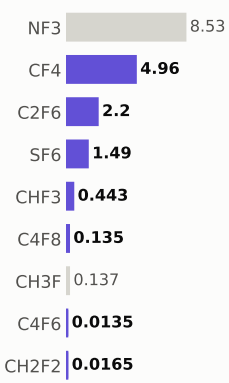

Step #8512.8859: HAR_etch

etch_noop · HAR_etch

1.04	790.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

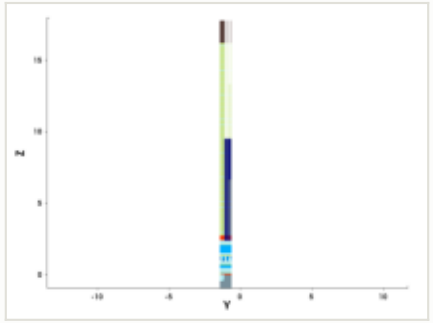

y cut at -1.035 µm

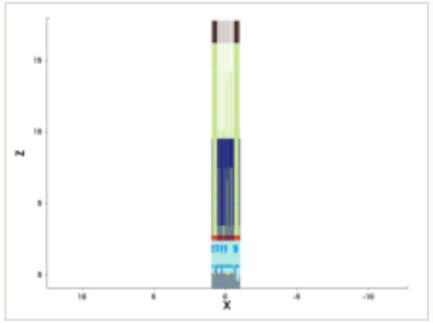

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

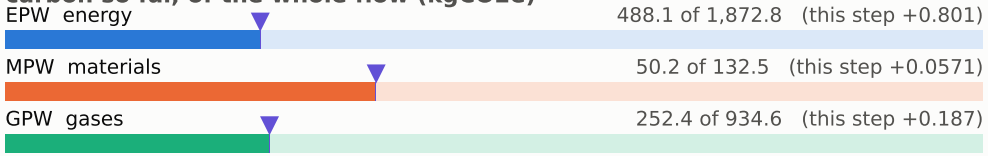

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

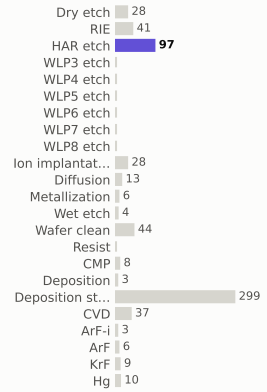

materials deposited (g)

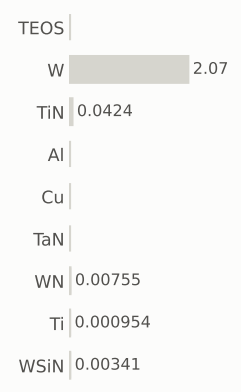

gases emitted (g)

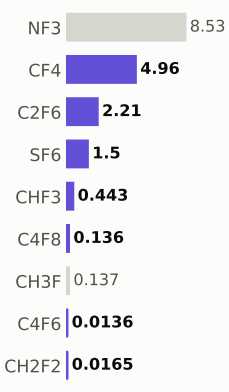

Step #8512.953: HAR_etch

etch_noop · HAR_etch

1.04	791.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

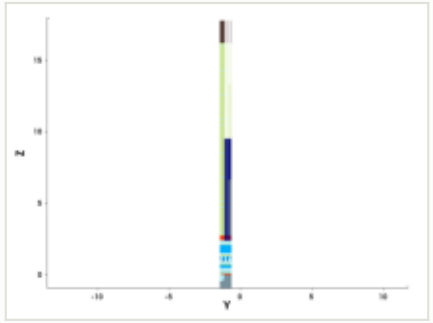

y cut at -1.035 µm

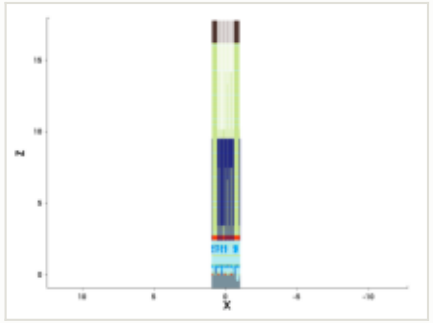

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

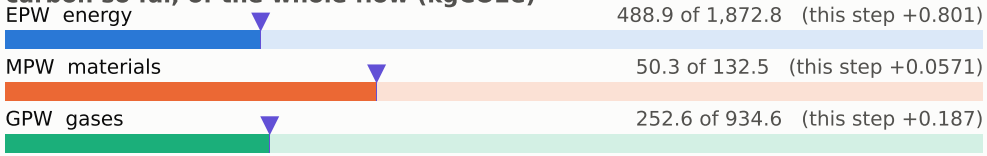

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

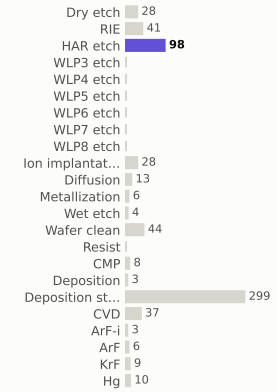

materials deposited (g)

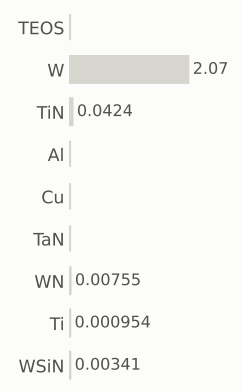

gases emitted (g)

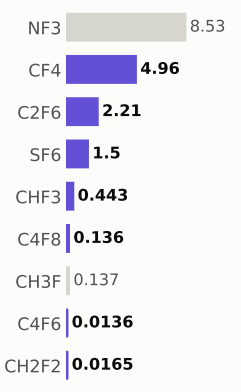

Step #8513.0201: HAR_etch

etch_noop · HAR_etch

1.04	792.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

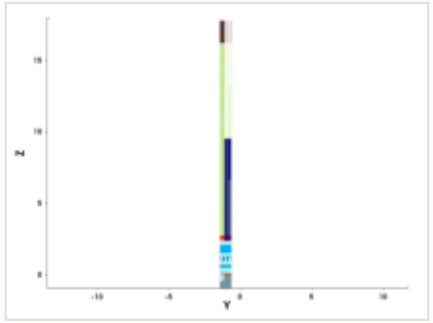

y cut at -1.035 µm

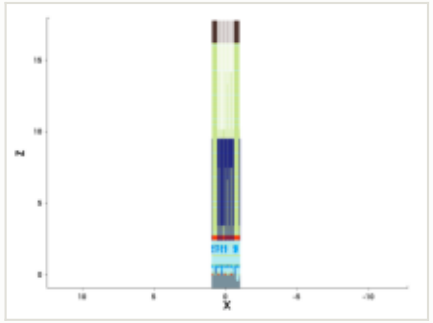

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

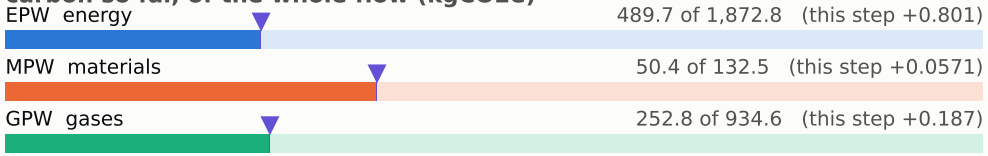

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

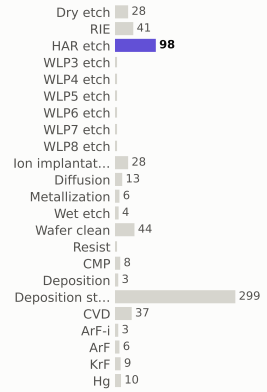

materials deposited (g)

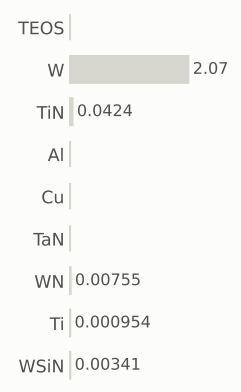

gases emitted (g)

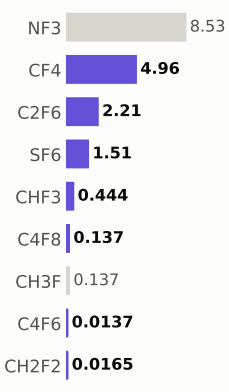

Step #8513.0872: HAR_etch

etch_noop · HAR_etch

1.04	793.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

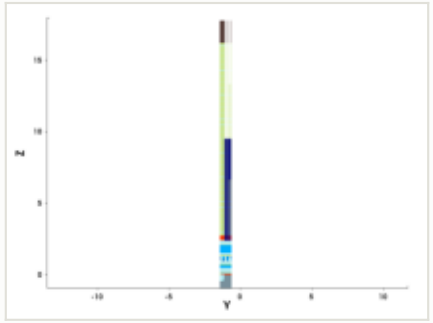

y cut at -1.035 µm

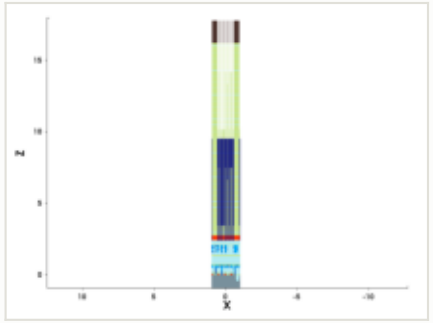

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

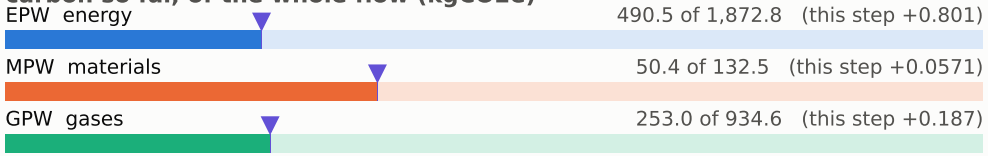

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

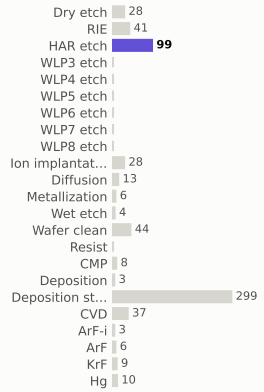

materials deposited (g)

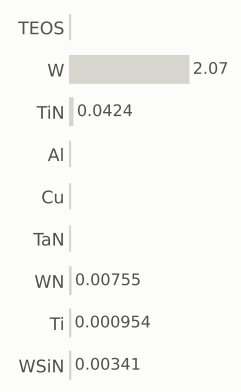

gases emitted (g)

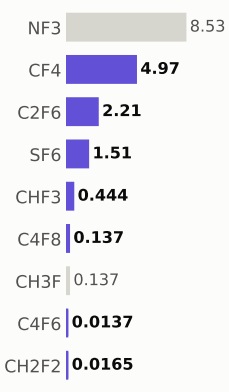

Step #8513.1544: HAR_etch

etch_noop · HAR_etch

1.04	795.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

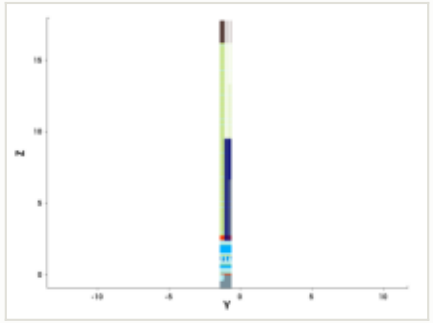

y cut at -1.035 µm

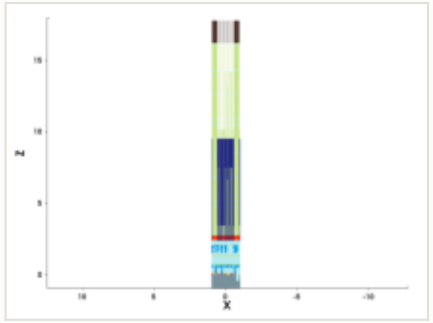

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

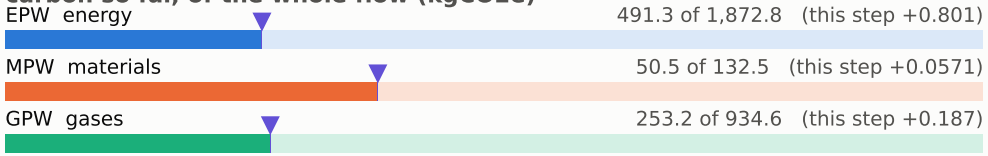

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

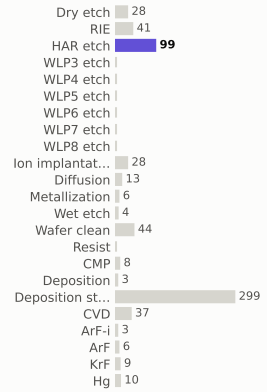

materials deposited (g)

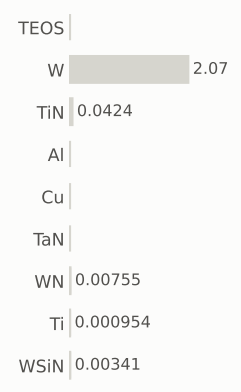

gases emitted (g)

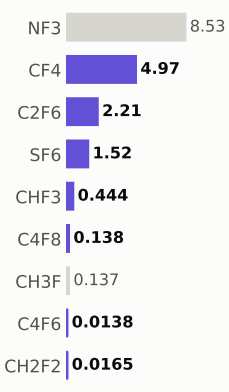

Step #8513.2215: HAR_etch

etch_noop · HAR_etch

1.04	796.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

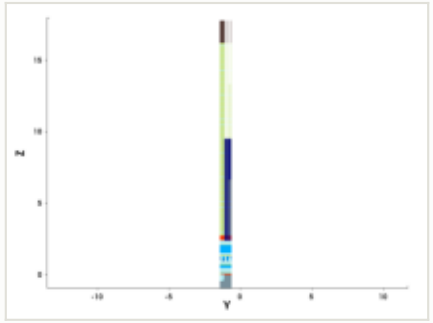

y cut at -1.035 µm

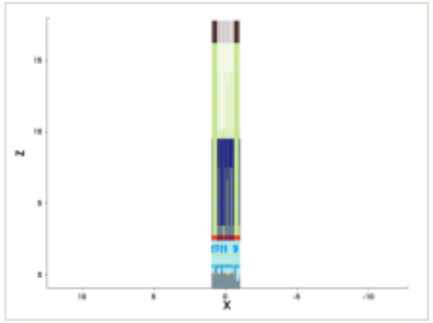

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

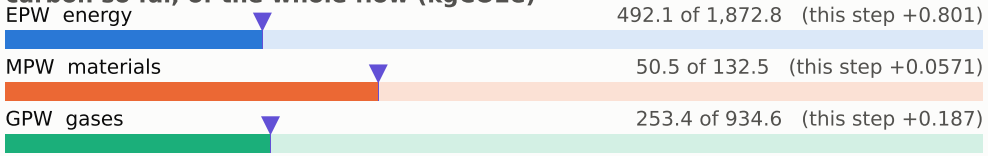

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

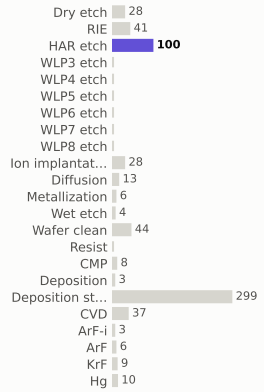

materials deposited (g)

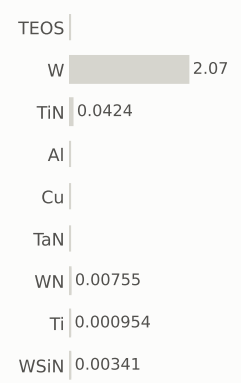

gases emitted (g)

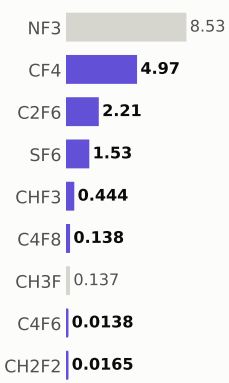

Step #8513.2886: HAR_etch

etch_noop · HAR_etch

1.04	797.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

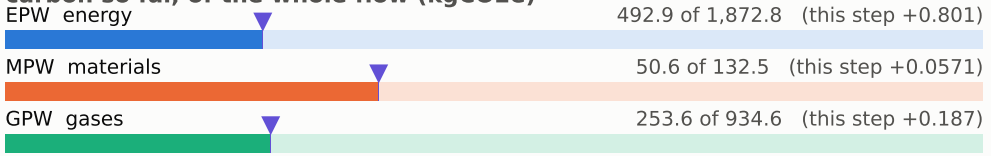

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

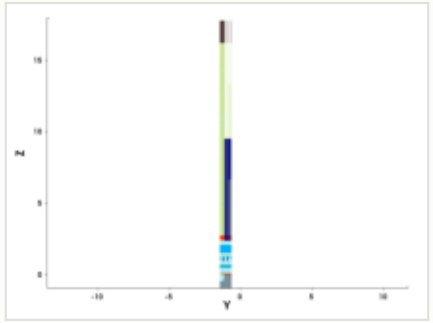

y cut at -1.035 µm

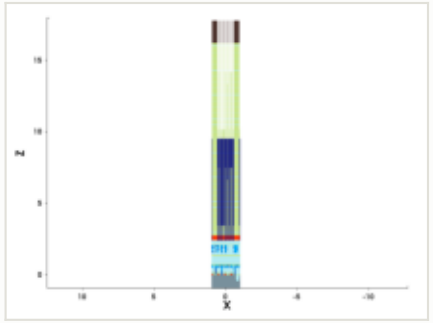

mask for this step

no mask for this step

steps by process area

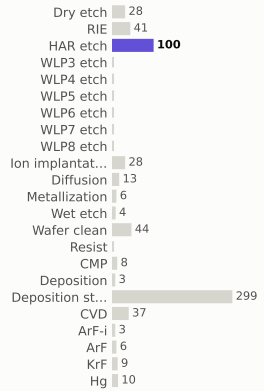

materials deposited (g)

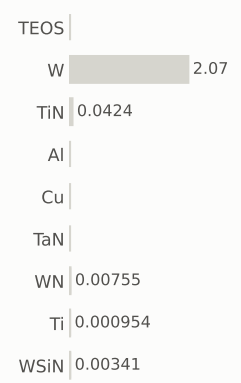

gases emitted (g)

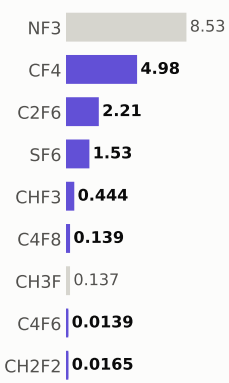

Step #8513.3557: HAR_etch

etch_noop · HAR_etch

1.04	798.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

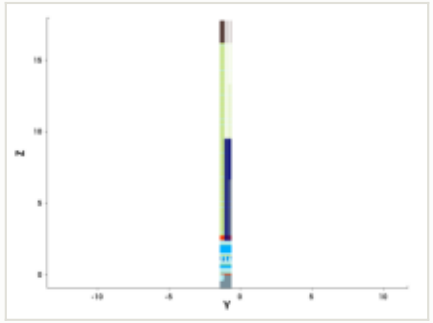

y cut at -1.035 µm

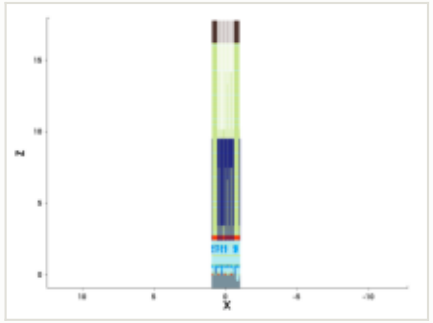

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

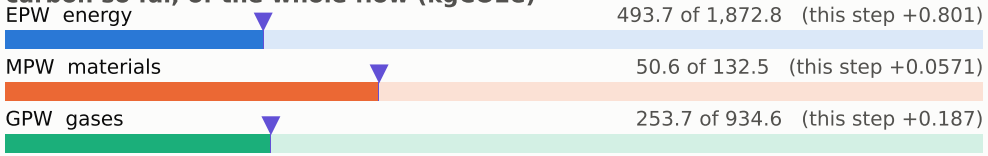

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

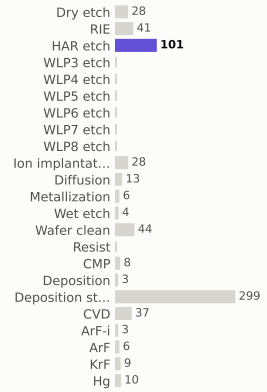

materials deposited (g)

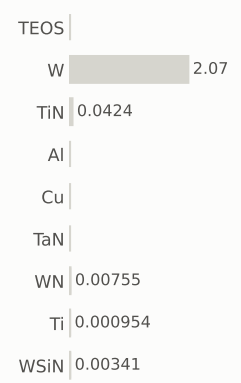

gases emitted (g)

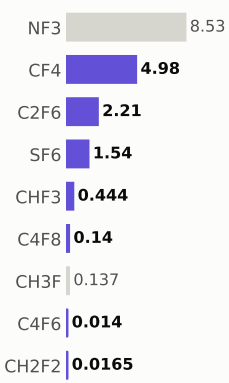

Step #8513.4228: HAR_etch

etch_noop · HAR_etch

1.04	799.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

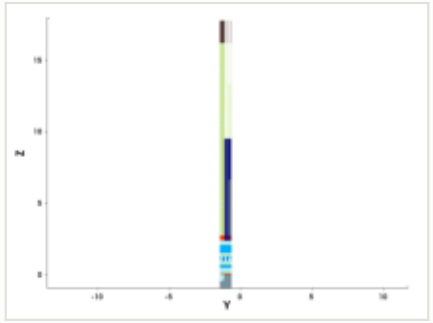

y cut at -1.035 µm

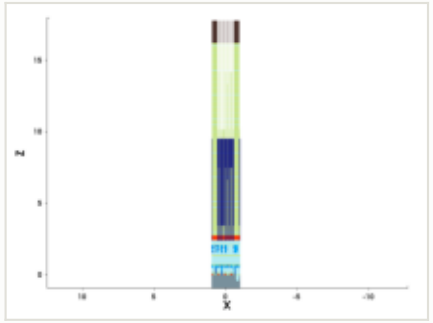

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

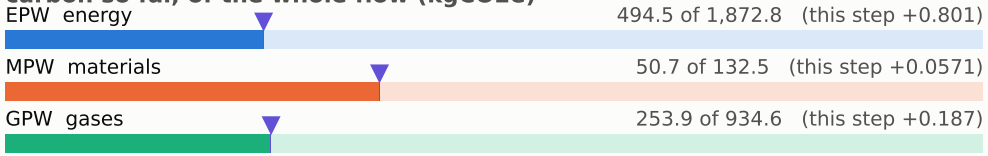

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

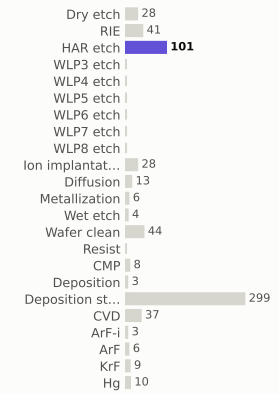

materials deposited (g)

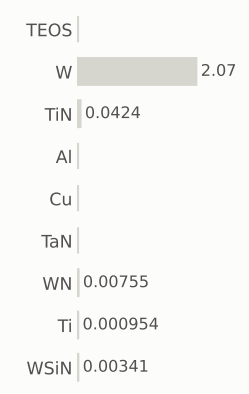

gases emitted (g)

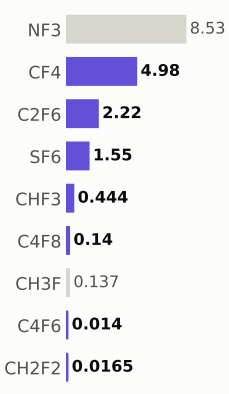

Step #8513.4899: HAR_etch

etch_noop · HAR_etch

1.04	800.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

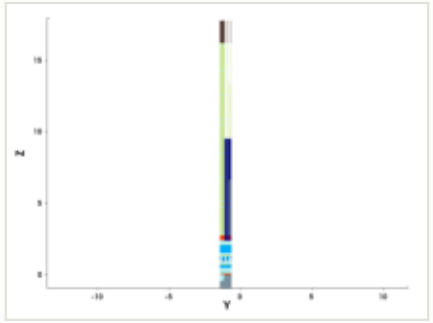

y cut at -1.035 µm

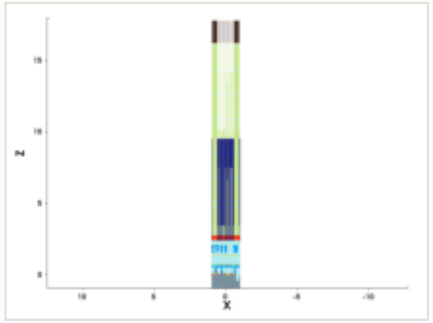

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

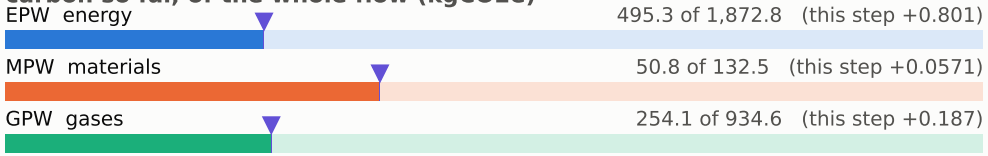

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

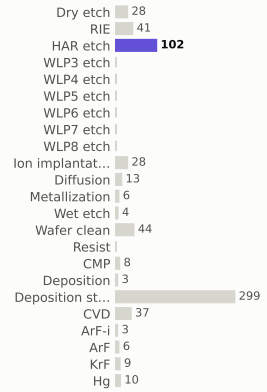

materials deposited (g)

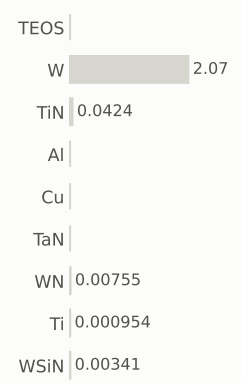

gases emitted (g)

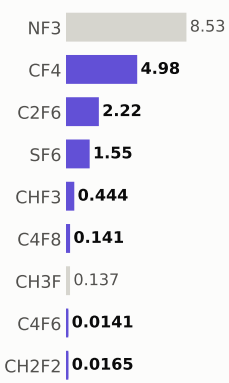

Step #8513.557: HAR_etch

etch_noop · HAR_etch

1.04	801.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

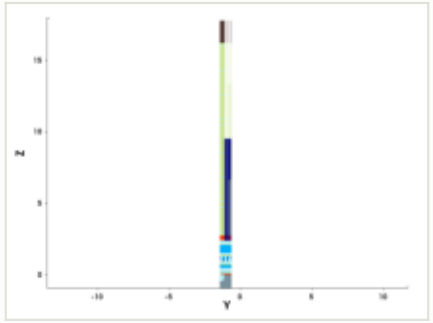

y cut at -1.035 µm

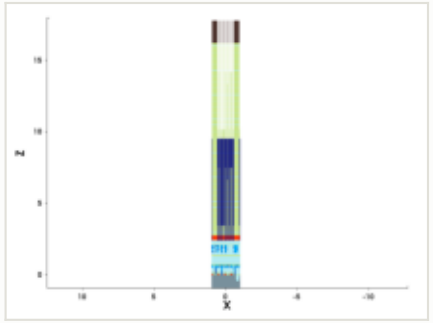

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

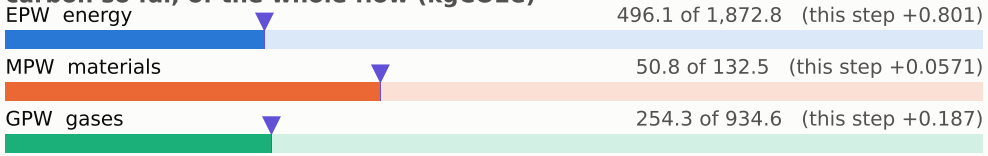

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

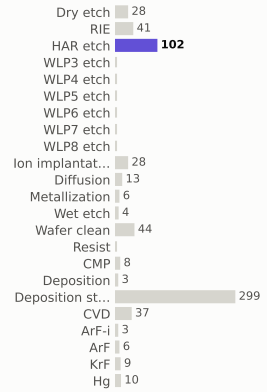

materials deposited (g)

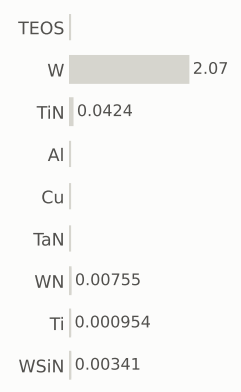

gases emitted (g)

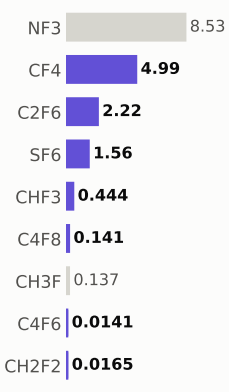

Step #8513.6242: HAR_etch

etch_noop · HAR_etch

1.04	802.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

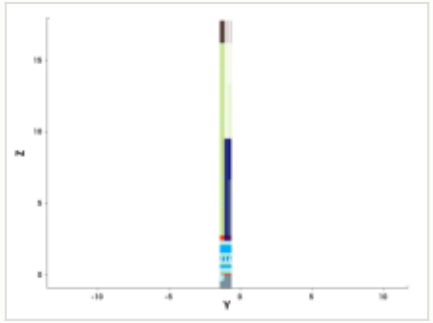

y cut at -1.035 µm

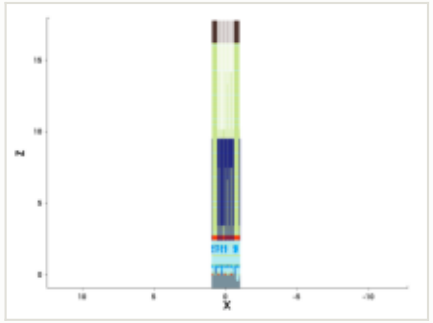

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

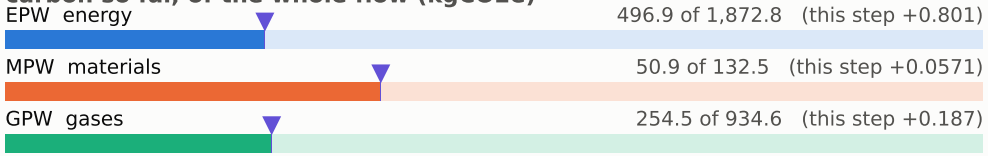

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

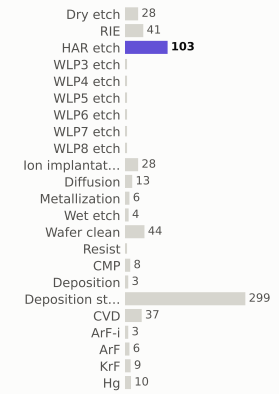

materials deposited (g)



gases emitted (g)



Step #8513.6913: HAR_etch

etch_noop · HAR_etch

1.04	803.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

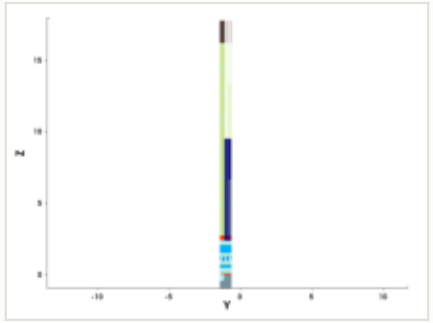

y cut at -1.035 µm

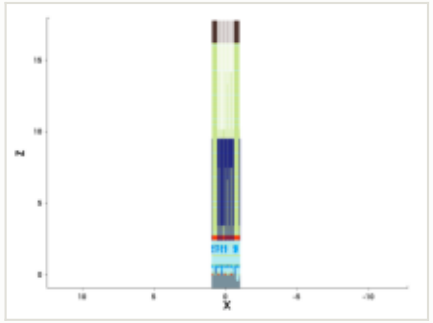

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

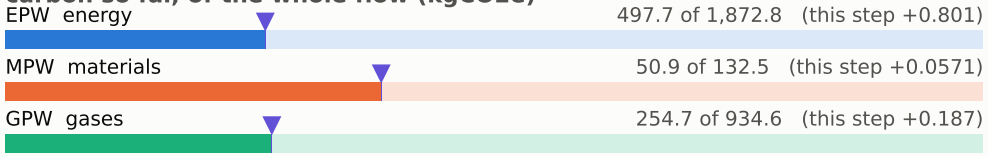

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

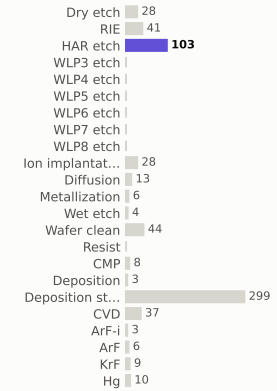

materials deposited (g)

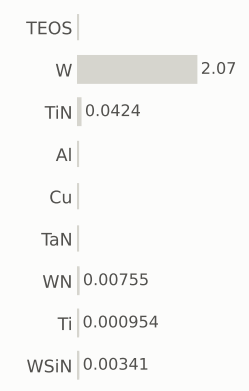

gases emitted (g)

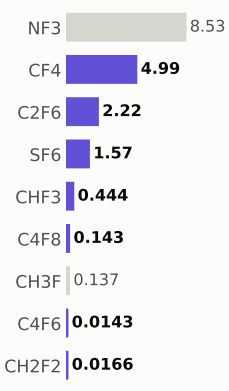

Step #8513.7584: HAR_etch

etch_noop · HAR_etch

1.04	804.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

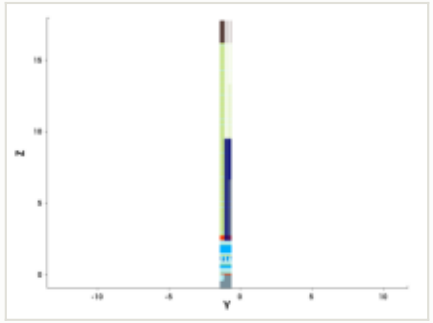

y cut at -1.035 µm

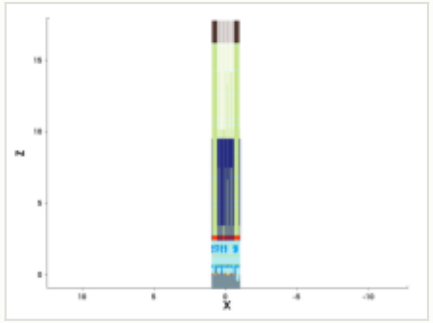

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

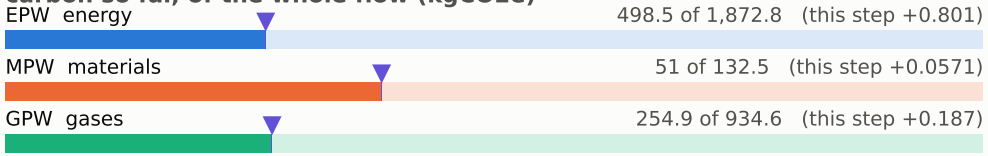

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

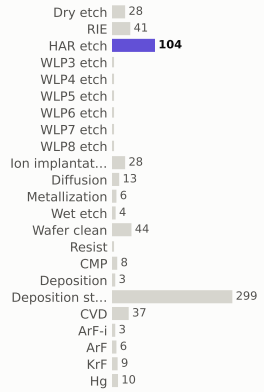

materials deposited (g)

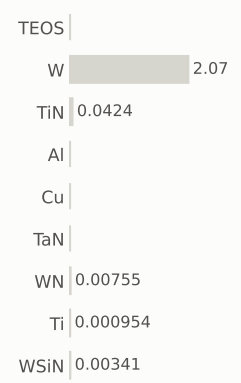

gases emitted (g)

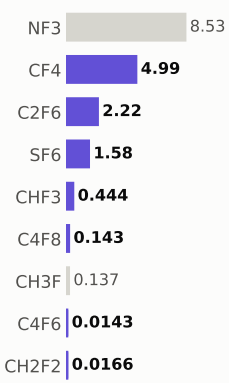

Step #8513.8255: HAR_etch

etch_noop · HAR_etch

1.04	805.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

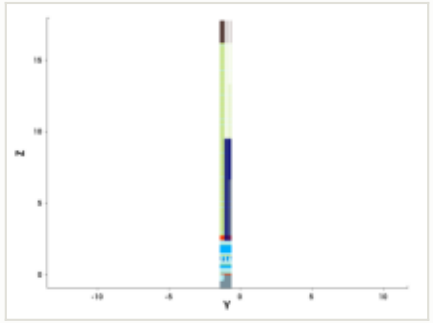

y cut at -1.035 µm

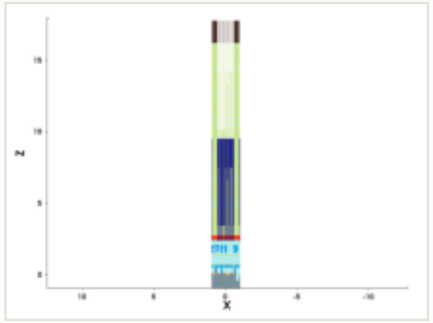

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

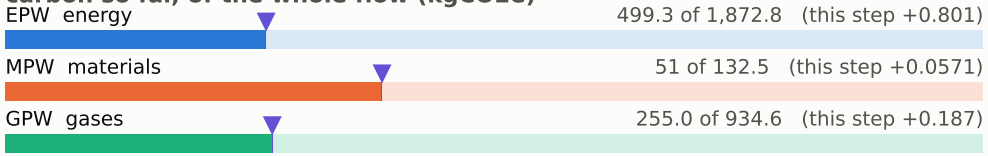

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

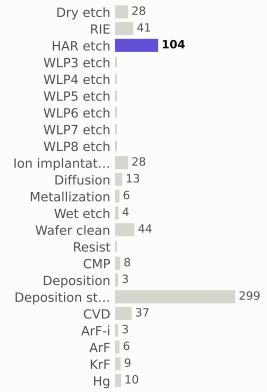

materials deposited (g)

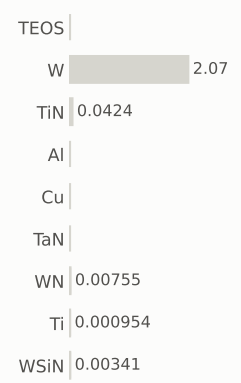

gases emitted (g)

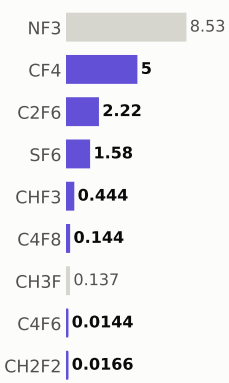

Step #8513.8926: HAR_etch

etch_noop · HAR_etch

1.04	806.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

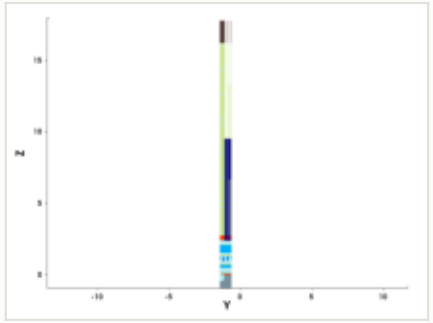

y cut at -1.035 µm

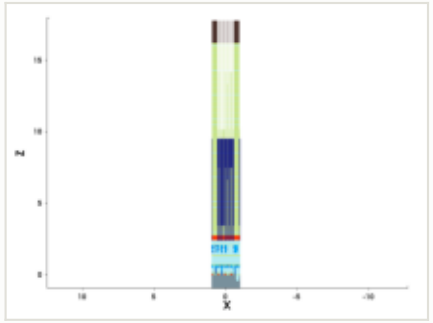

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

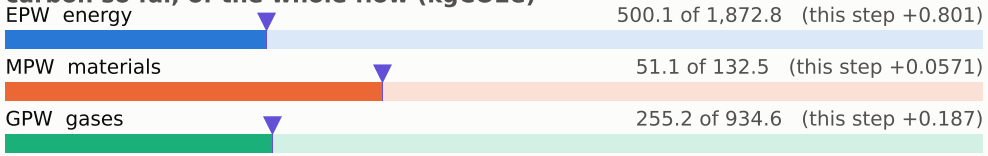

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

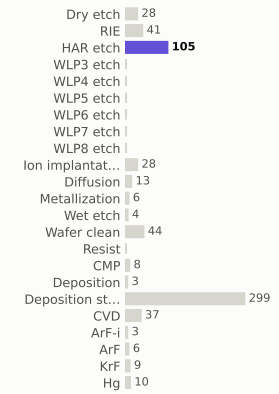

materials deposited (g)



gases emitted (g)



Step #8513.9597: HAR_etch

etch_noop · HAR_etch

1.04	807.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

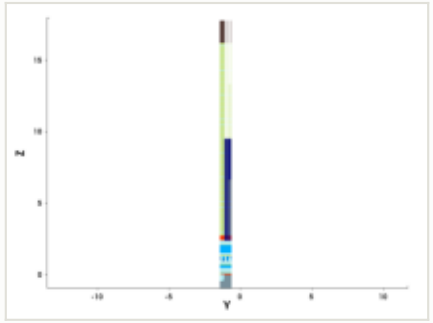

y cut at -1.035 µm

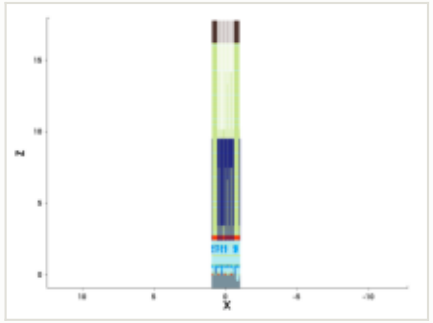

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

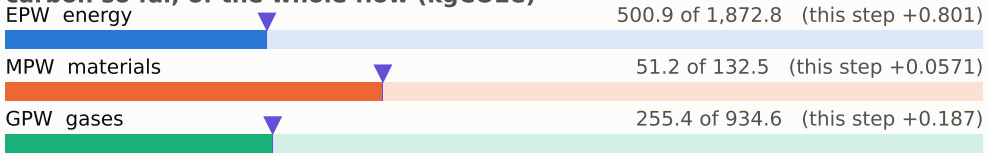

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

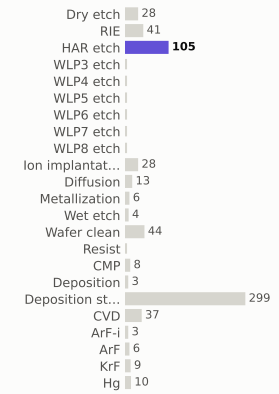

materials deposited (g)



gases emitted (g)

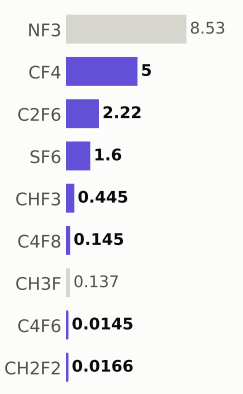

Step #8514.0268: HAR_etch

etch_noop · HAR_etch

1.04	808.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

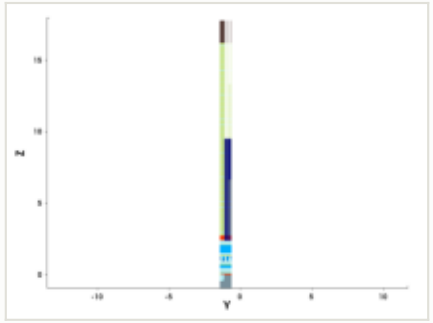

y cut at -1.035 µm

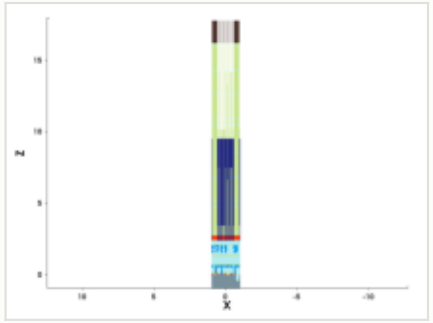

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

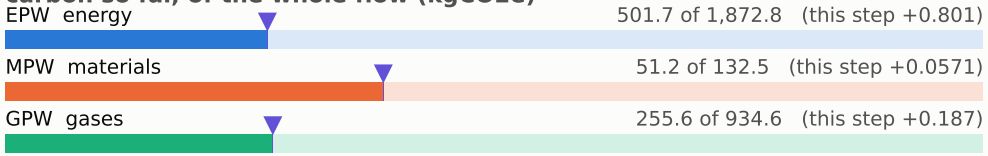

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

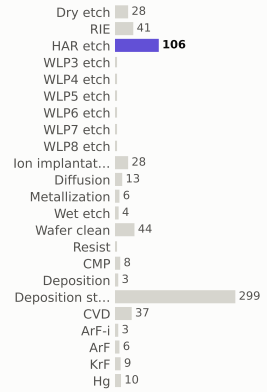

materials deposited (g)

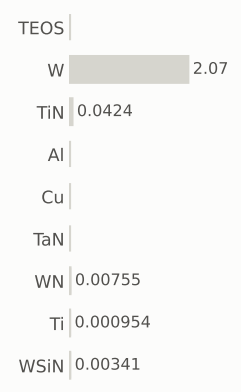

gases emitted (g)

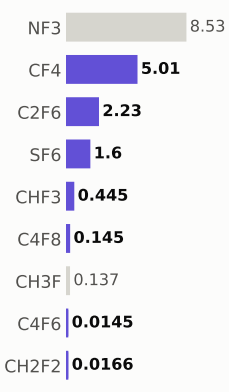

Step #8514.094: HAR_etch

etch_noop · HAR_etch

1.04	809.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

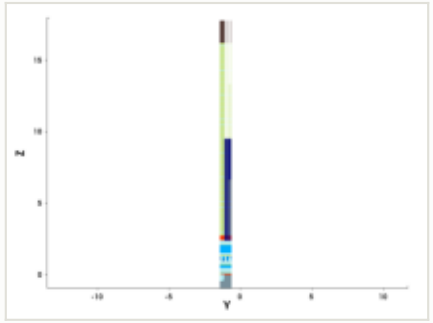

y cut at -1.035 µm

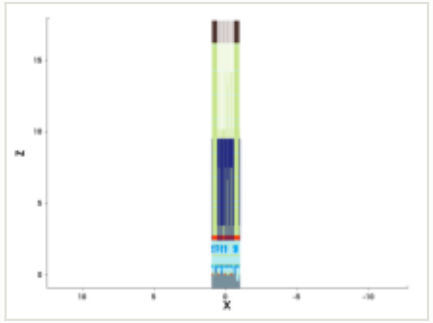

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

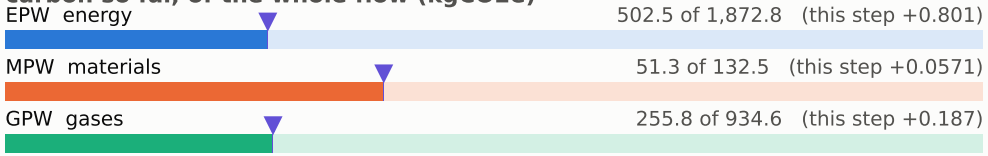

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

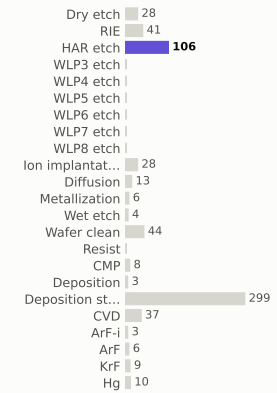

materials deposited (g)

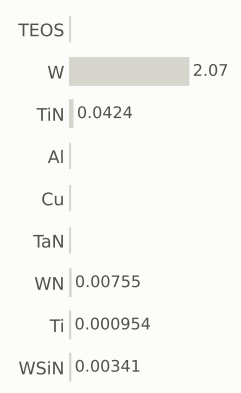

gases emitted (g)

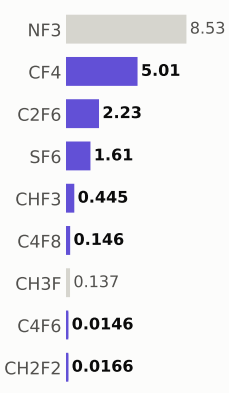

Step #8514.1611: HAR_etch

etch_noop · HAR_etch

1.04	810.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

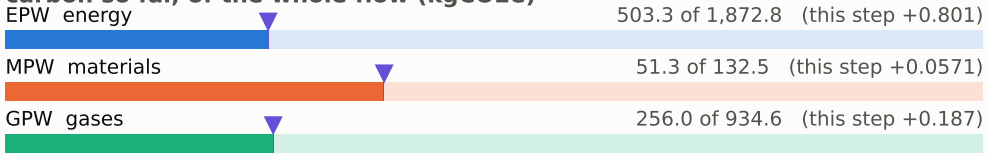

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

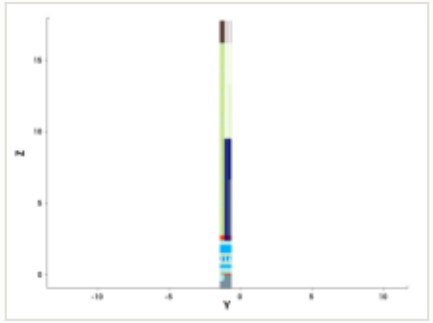

y cut at -1.035 µm

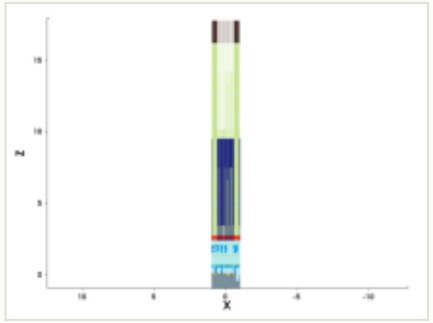

mask for this step

no mask for this step

steps by process area

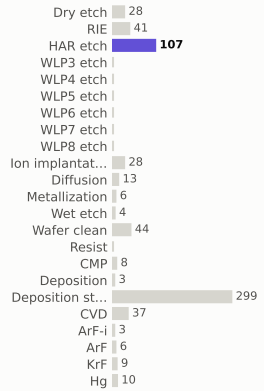

materials deposited (g)

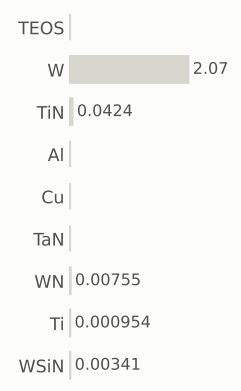

gases emitted (g)

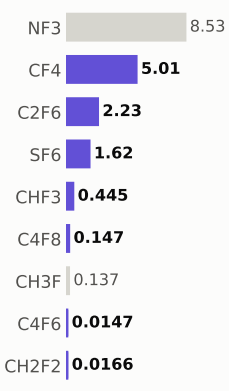

Step #8514.2282: HAR_etch

etch_noop · HAR_etch

1.04	811.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

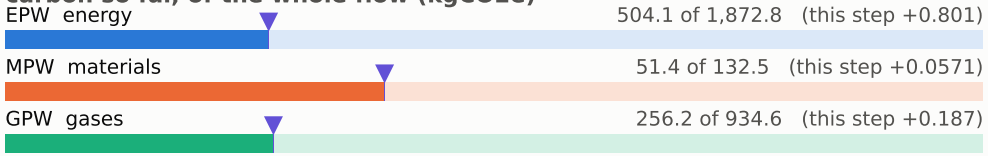

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

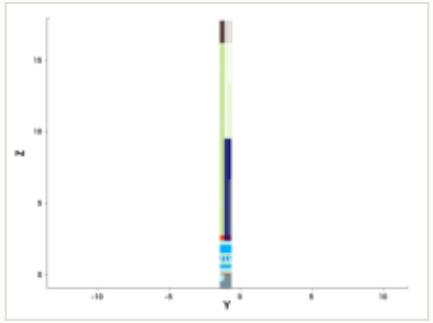

y cut at -1.035 µm

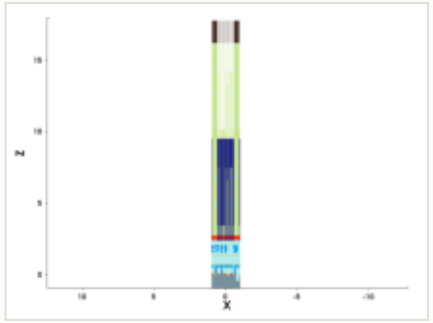

mask for this step

no mask for this step

steps by process area

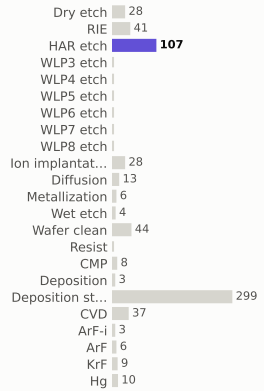

materials deposited (g)

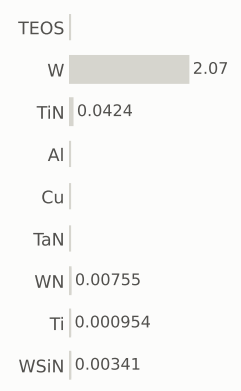

gases emitted (g)

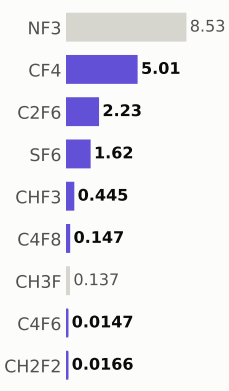

Step #8514.2953: HAR_etch

etch_noop · HAR_etch

1.04	812.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

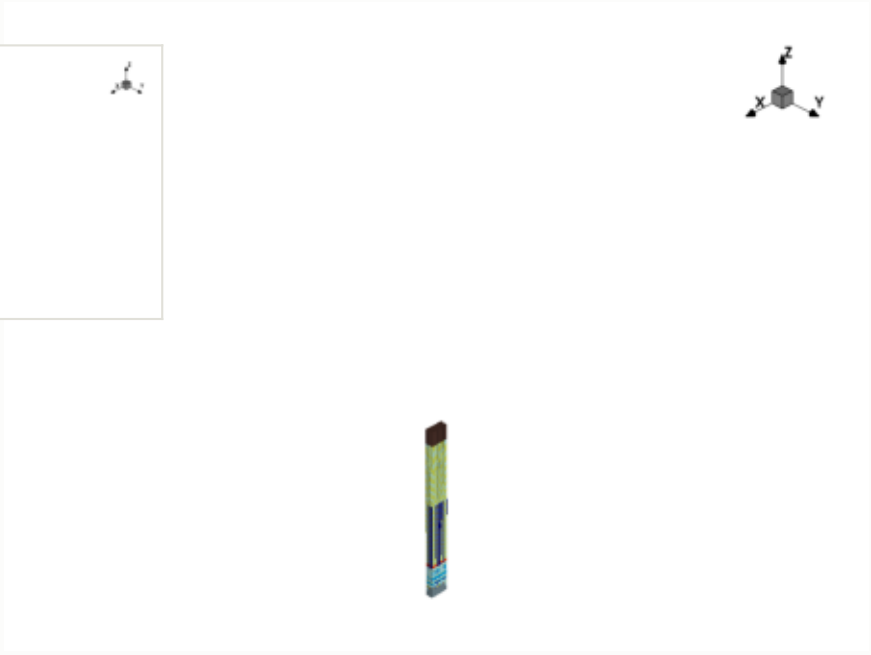

x cut at 0.000 µm

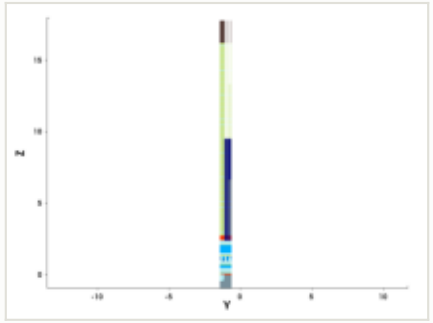

y cut at -1.035 µm

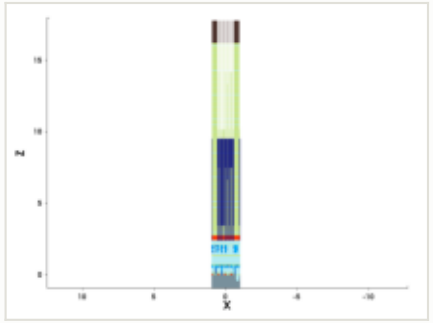

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

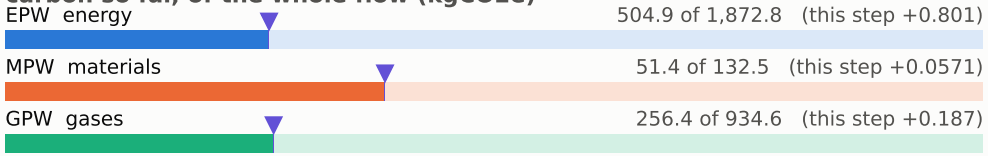

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

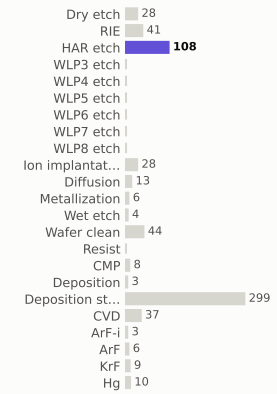

materials deposited (g)

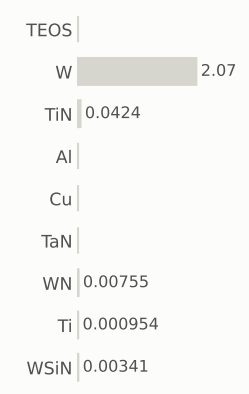

gases emitted (g)

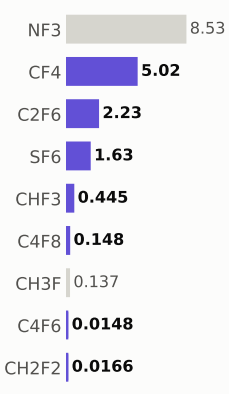

Step #8514.3624: HAR_etch

etch_noop · HAR_etch

1.04	813.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

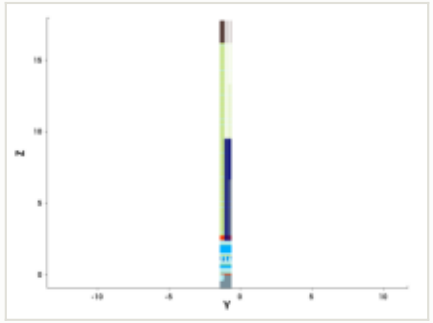

y cut at -1.035 µm

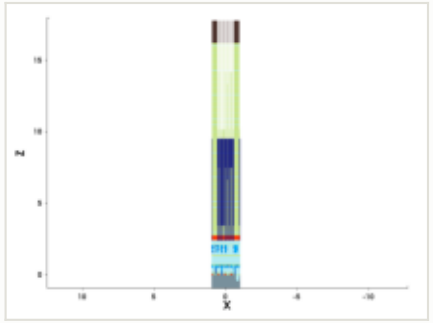

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

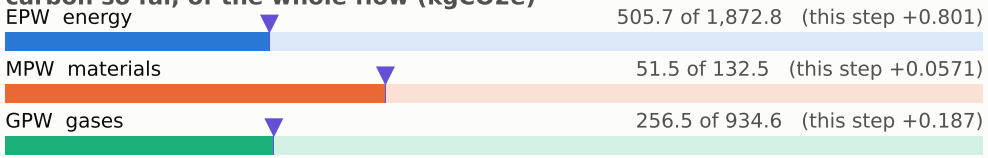

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

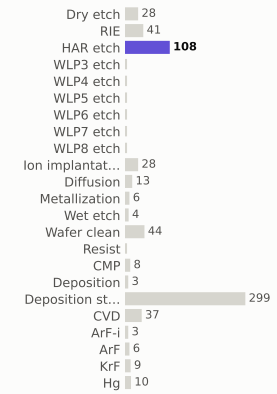

materials deposited (g)

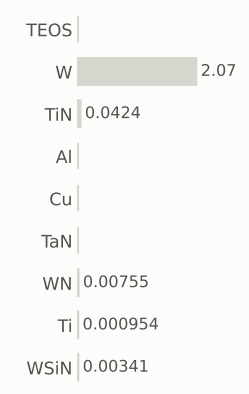

gases emitted (g)

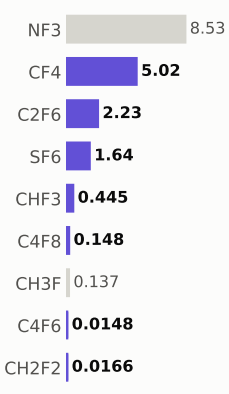

Step #8514.4295: HAR_etch

etch_noop · HAR_etch

1.04	814.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

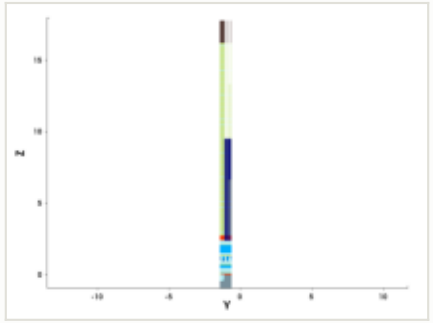

y cut at -1.035 µm

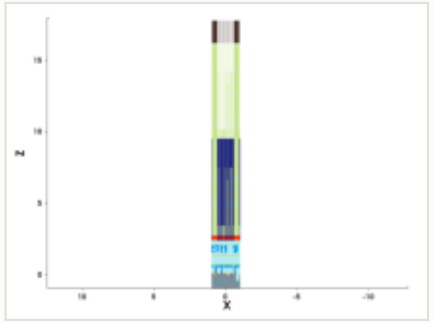

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

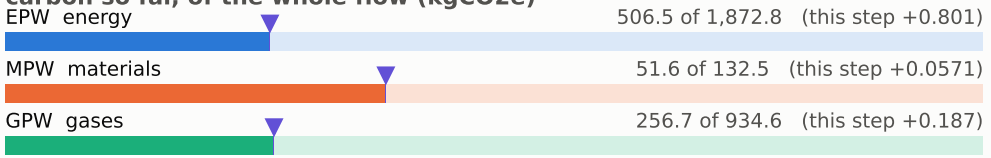

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

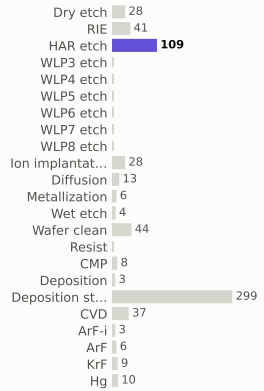

materials deposited (g)

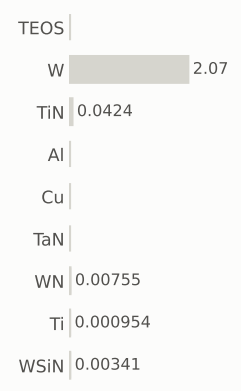

gases emitted (g)

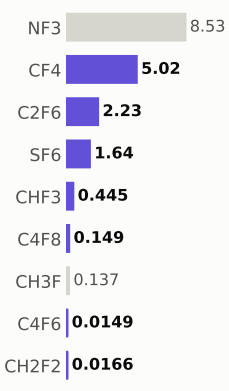

Step #8514.4966: HAR_etch

etch_noop · HAR_etch

1.04	815.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

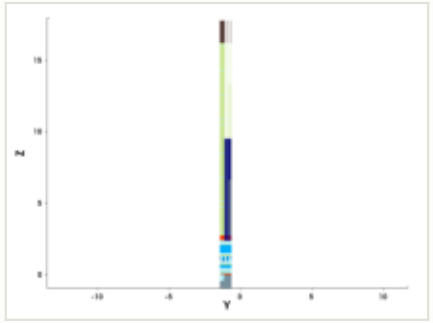

y cut at -1.035 µm

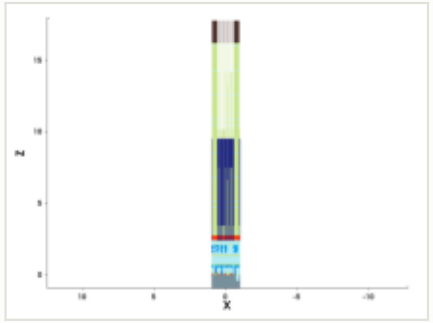

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

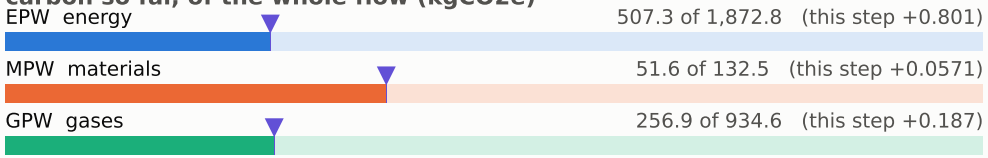

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

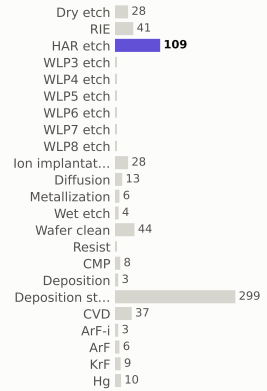

materials deposited (g)

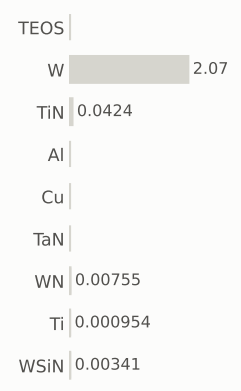

gases emitted (g)

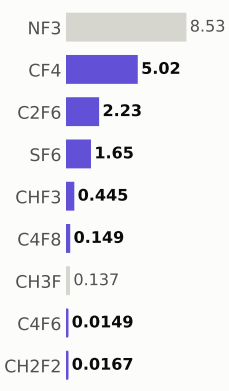

Step #8514.5638: HAR_etch

etch_noop · HAR_etch

1.04	816.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

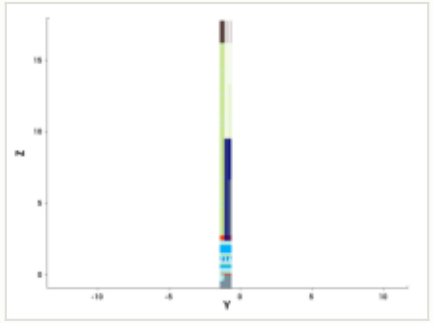

y cut at -1.035 µm

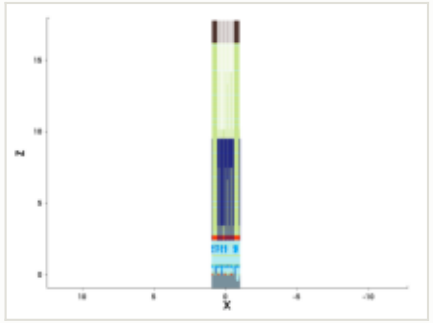

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

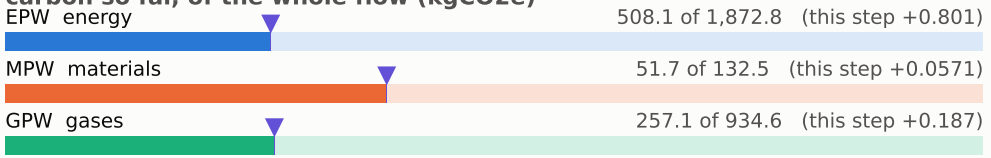

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

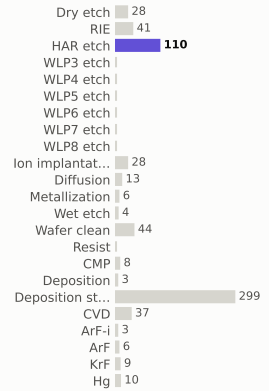

materials deposited (g)

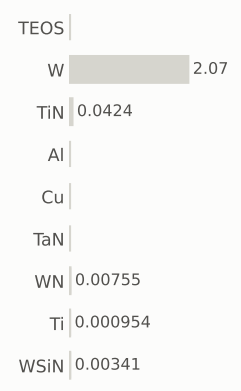

gases emitted (g)

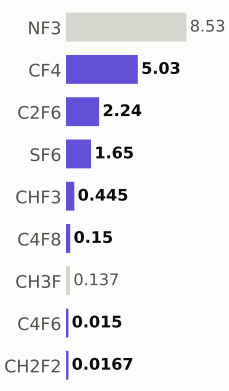

Step #8514.6309: HAR_etch

etch_noop · HAR_etch

1.04	818.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

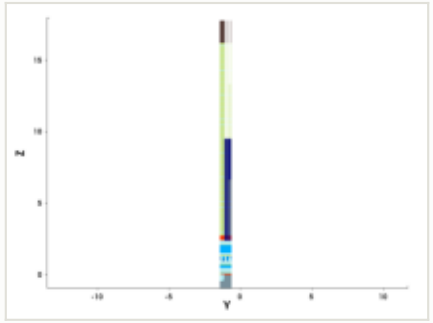

y cut at -1.035 µm

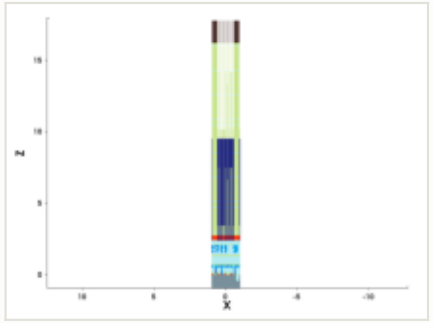

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

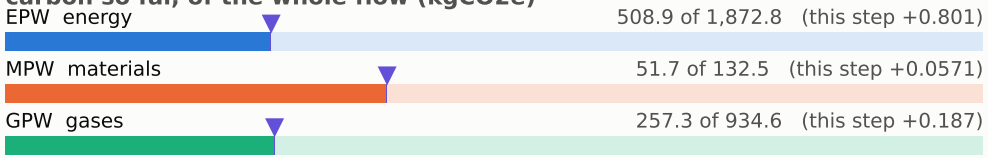

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

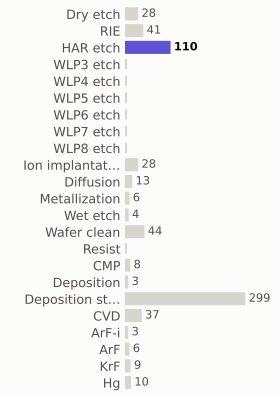

materials deposited (g)

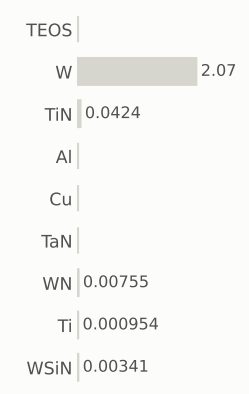

gases emitted (g)

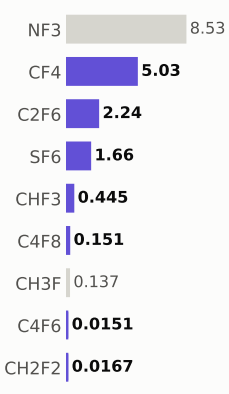

Step #8514.698: HAR_etch

etch_noop · HAR_etch

1.04	819.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

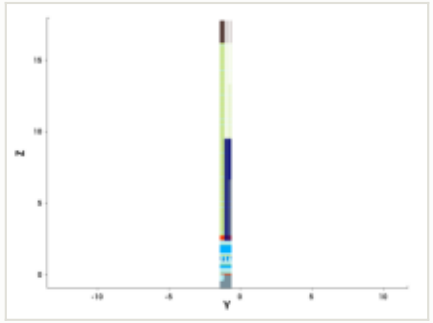

y cut at -1.035 µm

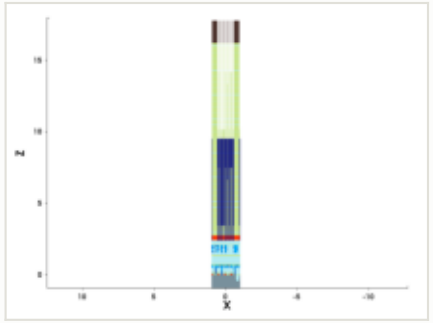

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

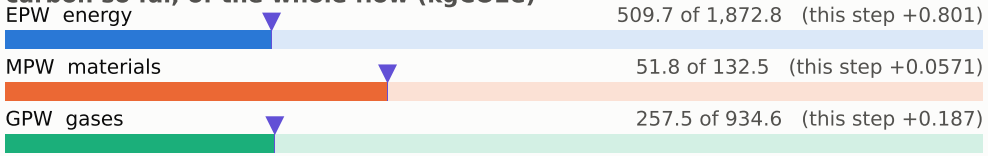

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

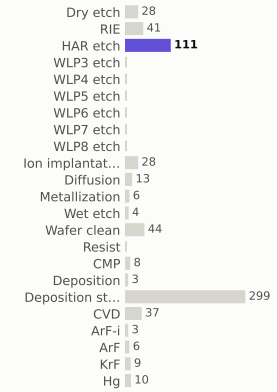

materials deposited (g)

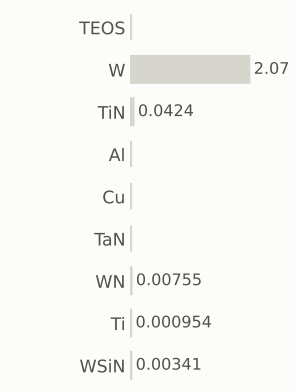

gases emitted (g)

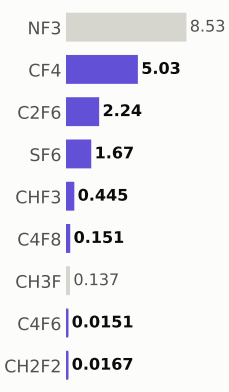

Step #8514.7651: HAR_etch

etch_noop · HAR_etch

1.04	820.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

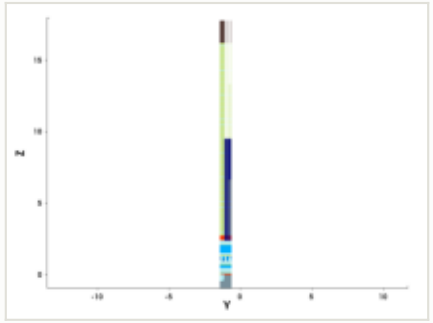

y cut at -1.035 µm

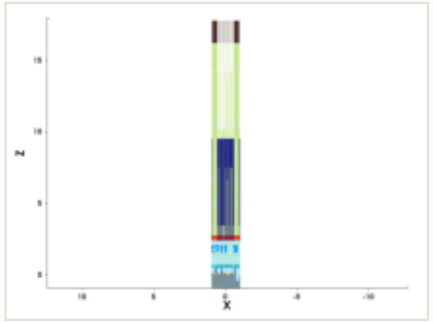

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

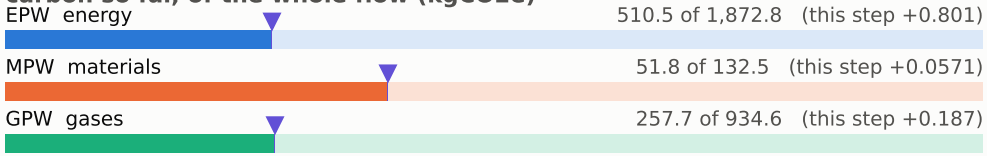

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

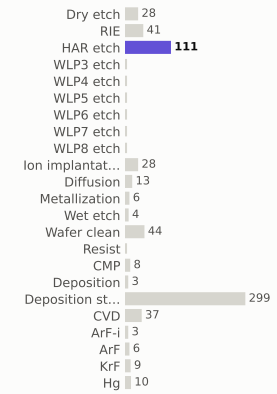

materials deposited (g)

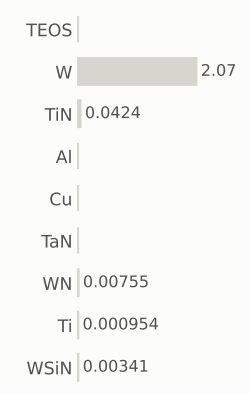

gases emitted (g)

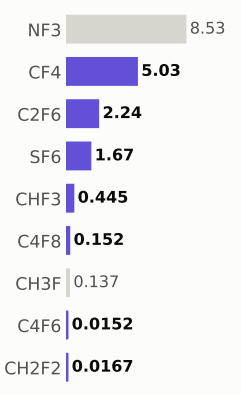

Step #8514.8322: HAR_etch

etch_noop · HAR_etch

1.04	821.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

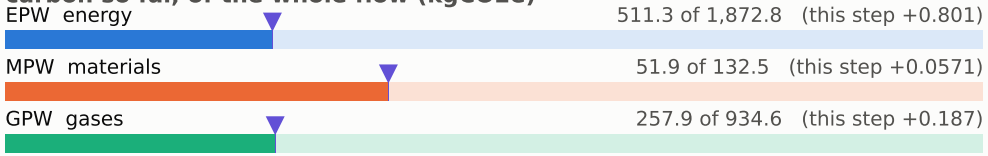

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

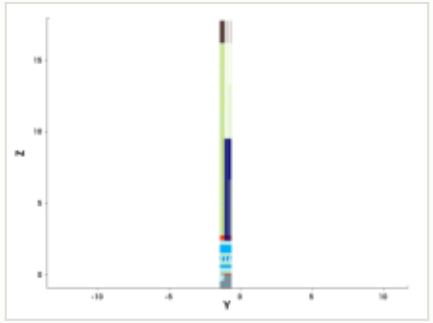

y cut at -1.035 µm

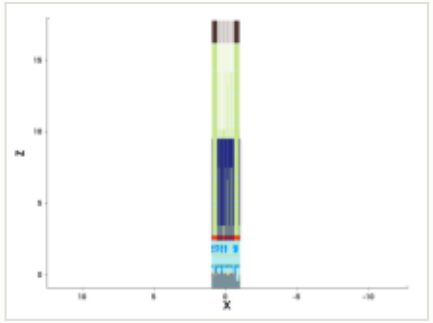

mask for this step

no mask for this step

steps by process area

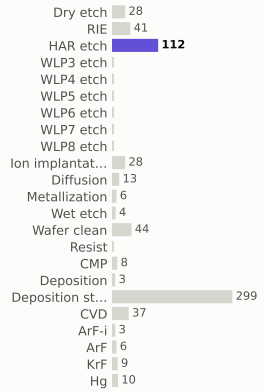

materials deposited (g)

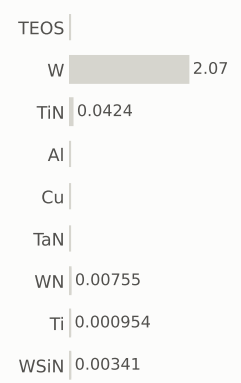

gases emitted (g)

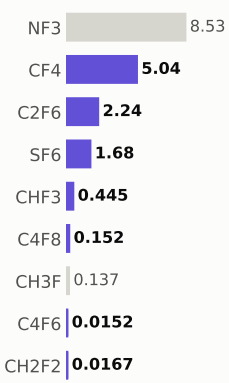

Step #8514.8993: HAR_etch

etch_noop · HAR_etch

1.04	822.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

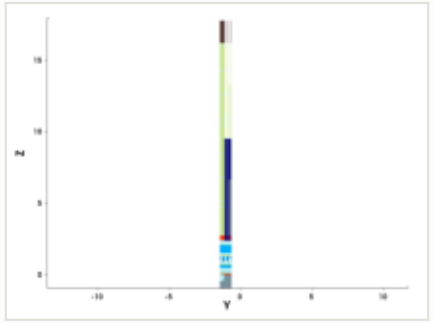

y cut at -1.035 µm

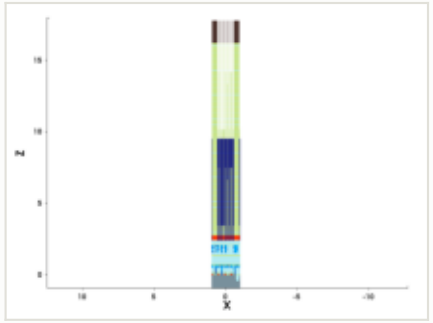

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

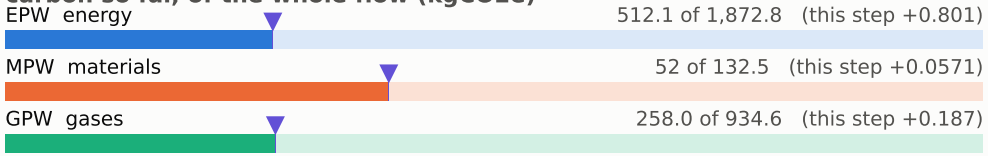

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

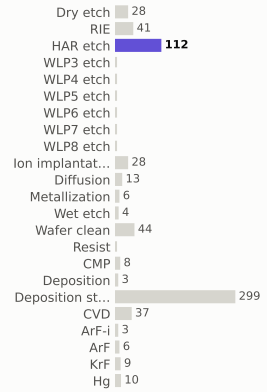

materials deposited (g)

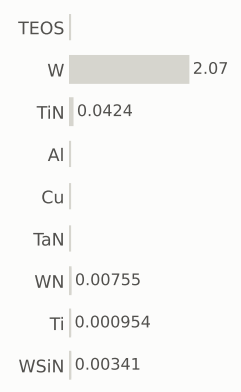

gases emitted (g)

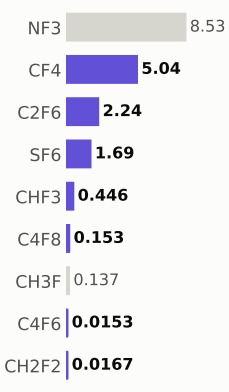

Step #8514.9664: HAR_etch

etch_noop · HAR_etch

1.04	823.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

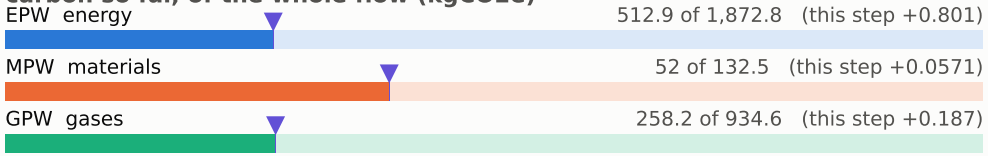

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

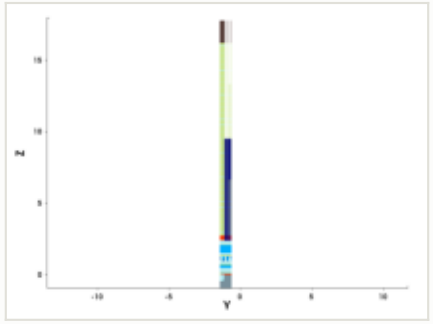

y cut at -1.035 µm

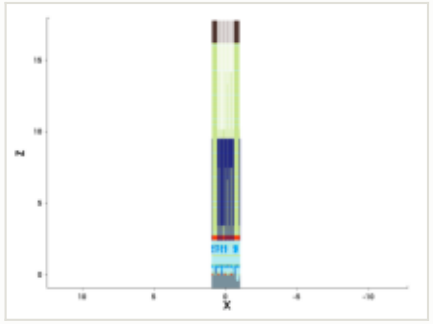

mask for this step

no mask for this step

steps by process area

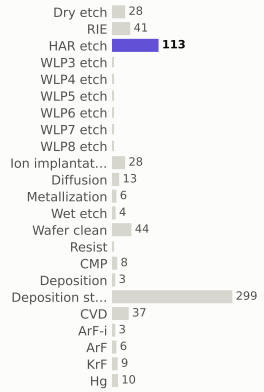

materials deposited (g)

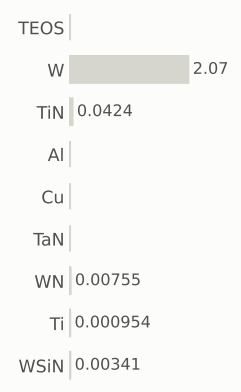

gases emitted (g)

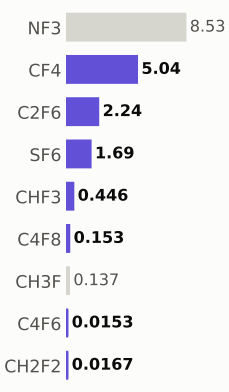

Step #8515.0336: HAR_etch

etch_noop · HAR_etch

1.04	824.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

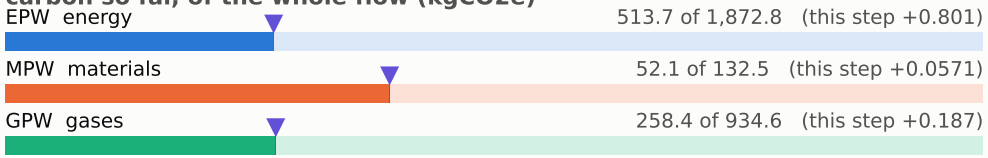

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

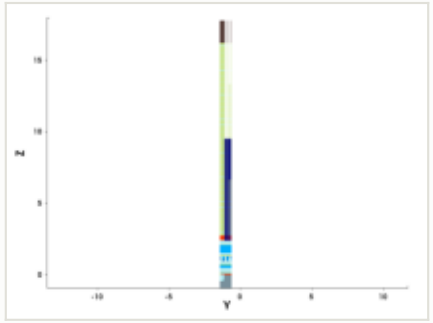

y cut at -1.035 µm

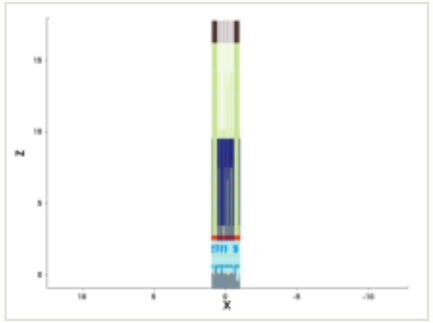

mask for this step

no mask for this step

steps by process area

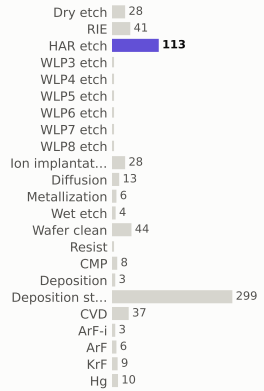

materials deposited (g)

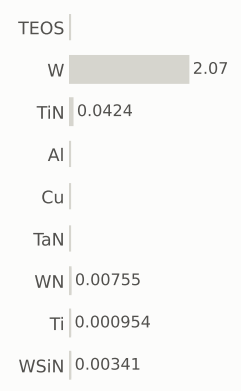

gases emitted (g)

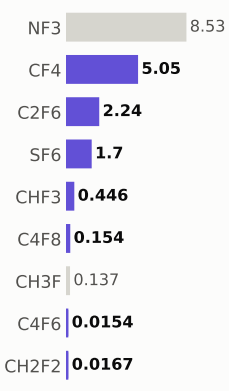

Step #8515.1007: HAR_etch

etch_noop · HAR_etch

1.04	825.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

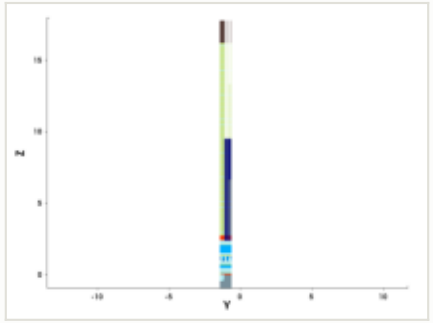

y cut at -1.035 µm

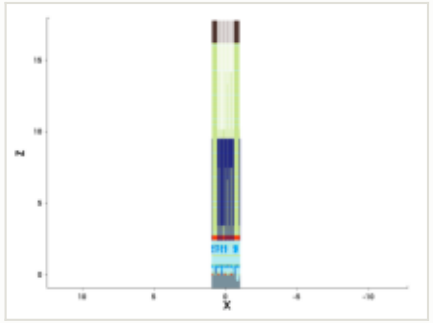

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

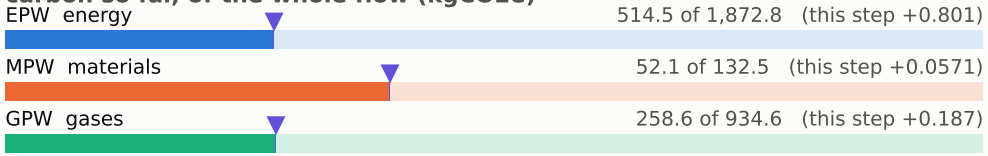

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

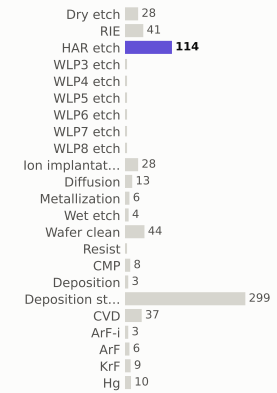

materials deposited (g)

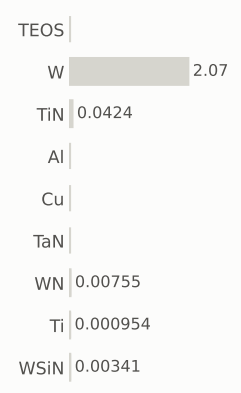

gases emitted (g)

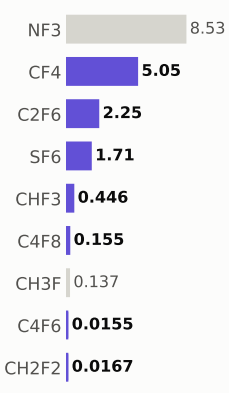

Step #8515.1678: HAR_etch

etch_noop · HAR_etch

1.04	826.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

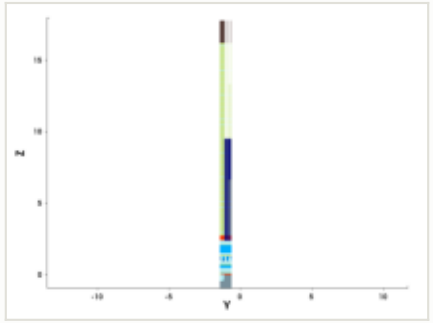

y cut at -1.035 µm

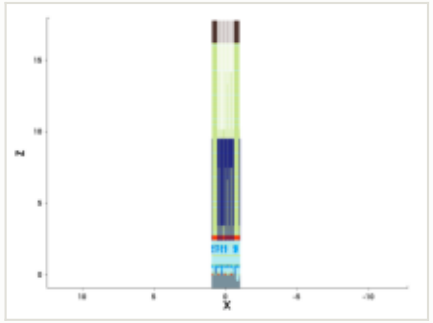

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

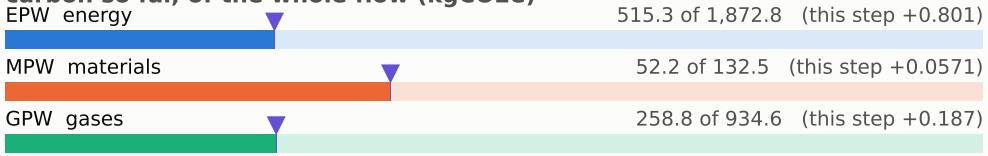

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

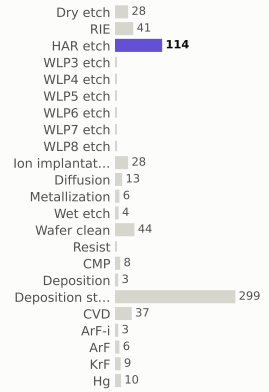

materials deposited (g)

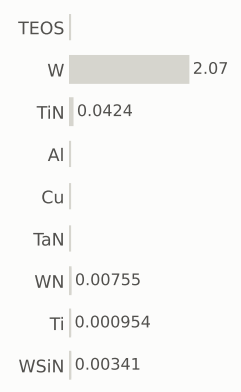

gases emitted (g)

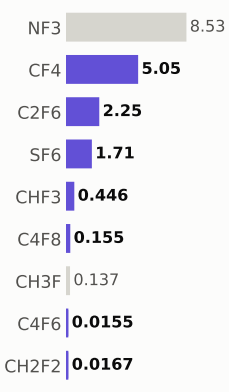

Step #8515.2349: HAR_etch

etch_noop · HAR_etch

1.04	827.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

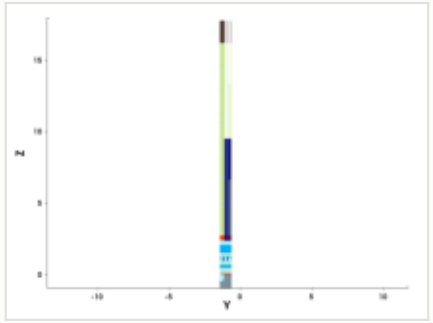

y cut at -1.035 µm

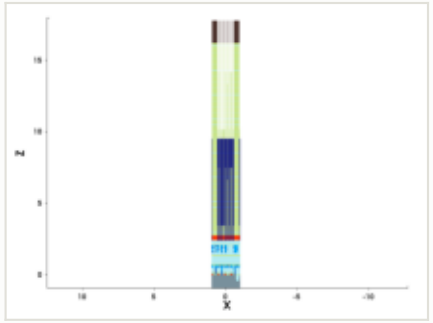

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

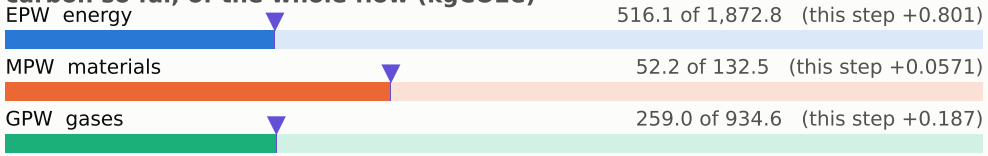

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

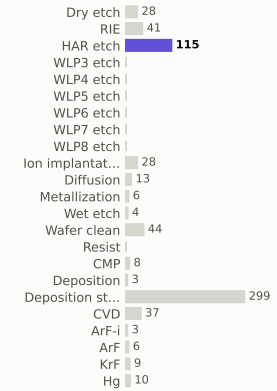

materials deposited (g)

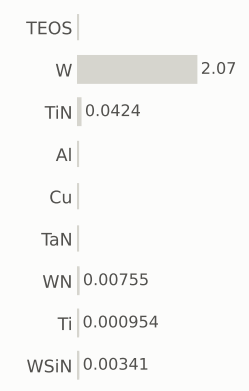

gases emitted (g)

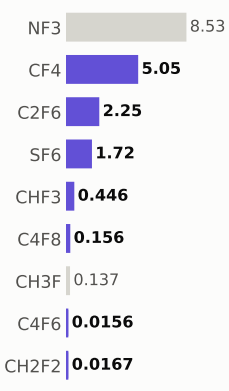

Step #8515.302: HAR_etch

etch_noop · HAR_etch

1.04	828.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

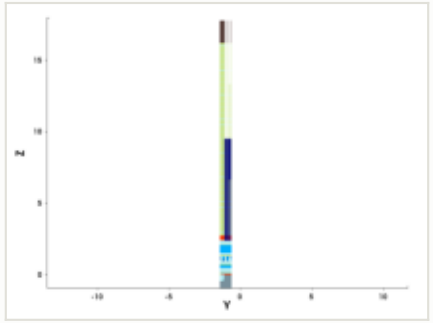

y cut at -1.035 µm

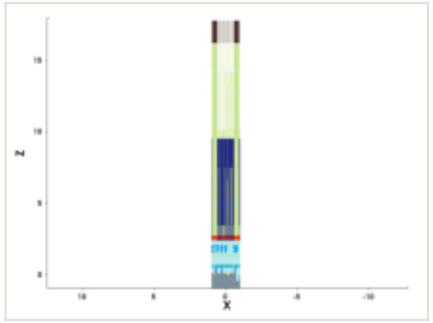

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

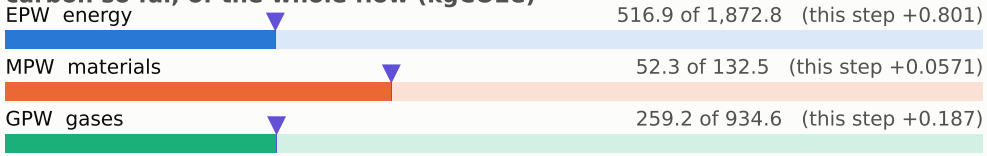

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

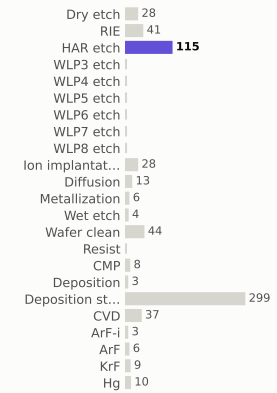

materials deposited (g)

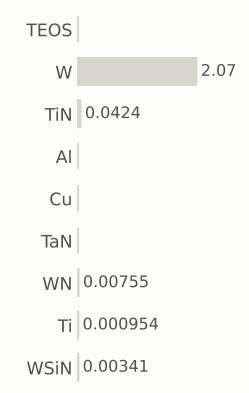

gases emitted (g)

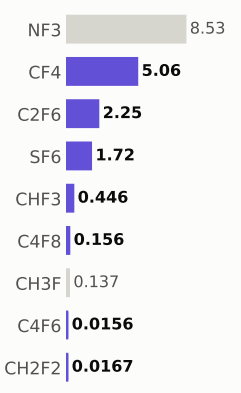

Step #8515.3691: HAR_etch

etch_noop · HAR_etch

1.04	829.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

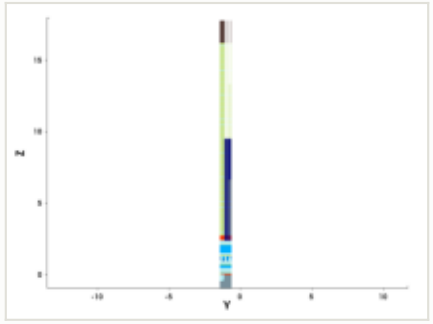

y cut at -1.035 µm

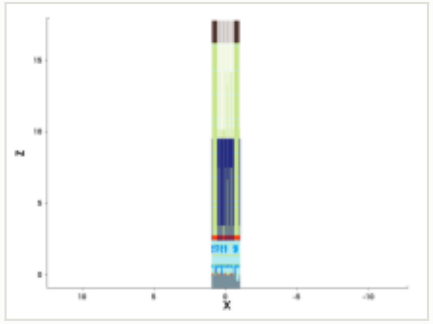

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

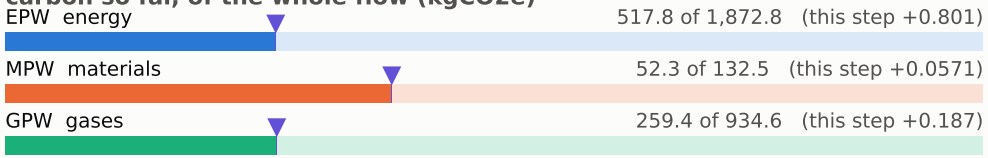

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

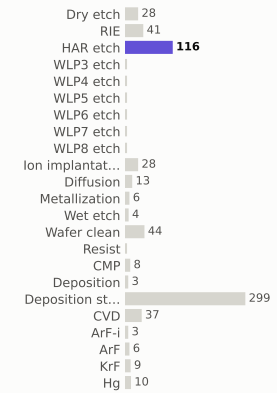

materials deposited (g)

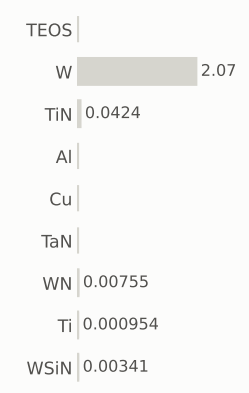

gases emitted (g)

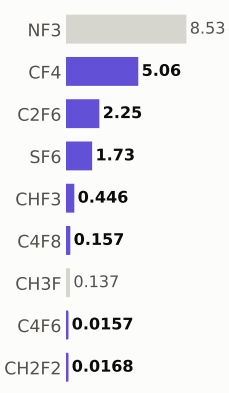

Step #8515.4362: HAR_etch

etch_noop · HAR_etch

1.04	830.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

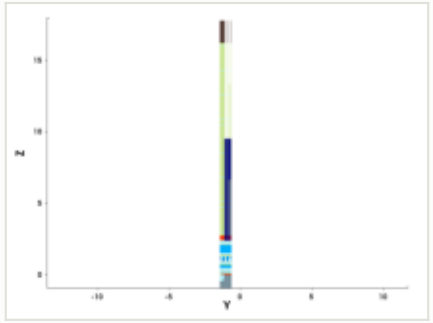

y cut at -1.035 µm

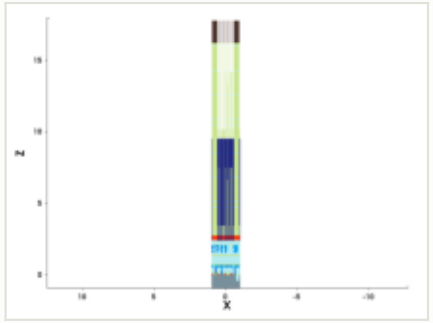

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

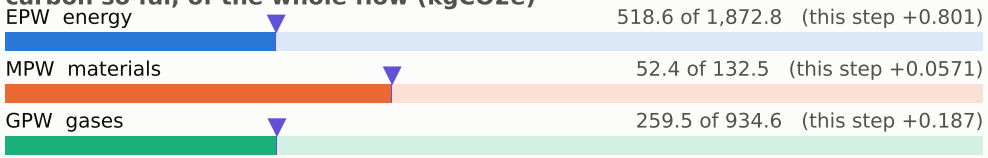

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

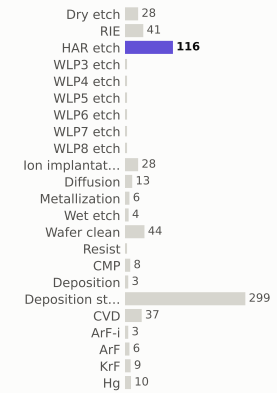

materials deposited (g)

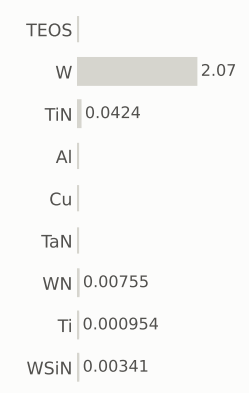

gases emitted (g)

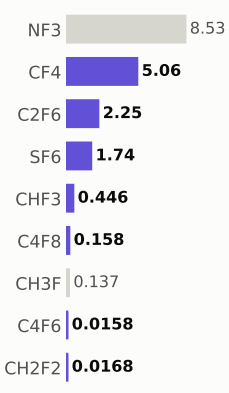

Step #8515.5034: HAR_etch

etch_noop · HAR_etch

1.04	831.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

EPW energy — 519.4 of 1,872.8 (this step +0.801)

MPW materials — 52.5 of 132.5 (this step +0.0571)

GPW gases — 259.7 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

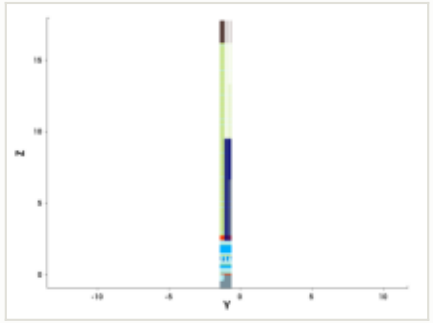

y cut at -1.035 µm

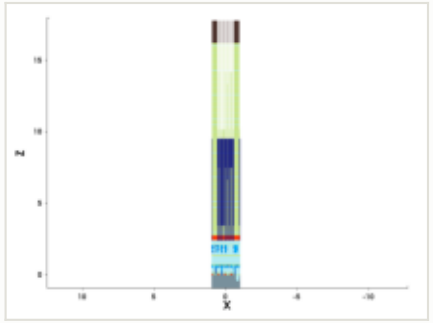

mask for this step

no mask for this step

steps by process area

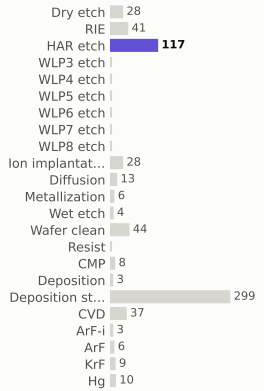

materials deposited (g)

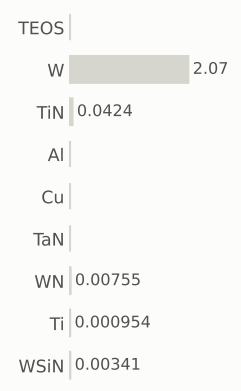

gases emitted (g)

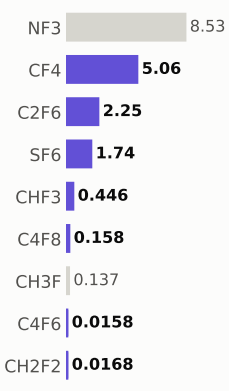

Step #8515.5705: HAR_etch

etch_noop · HAR_etch

1.04	832.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

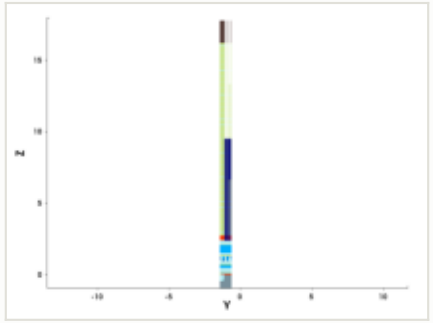

y cut at -1.035 µm

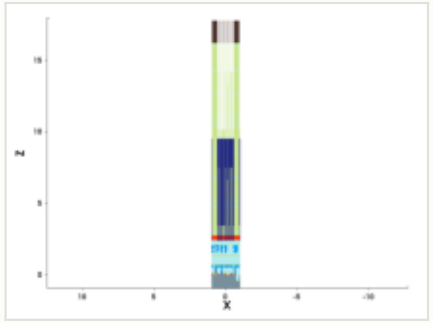

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

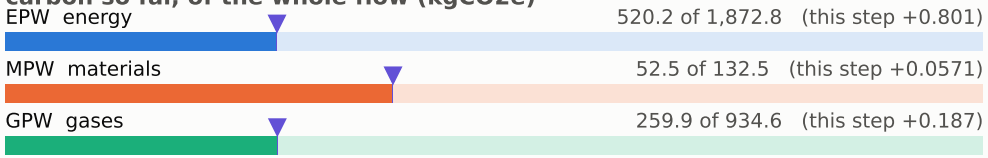

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

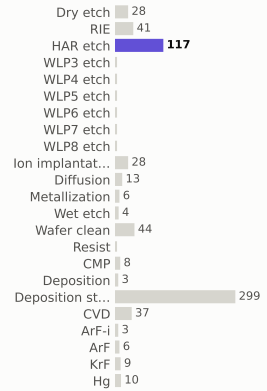

materials deposited (g)

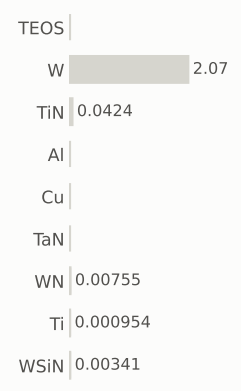

gases emitted (g)

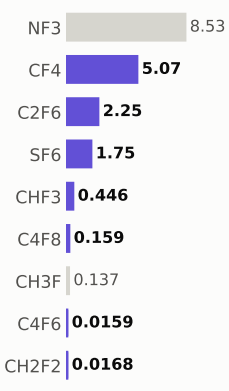

Step #8515.6376: HAR_etch

etch_noop · HAR_etch

1.04	833.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

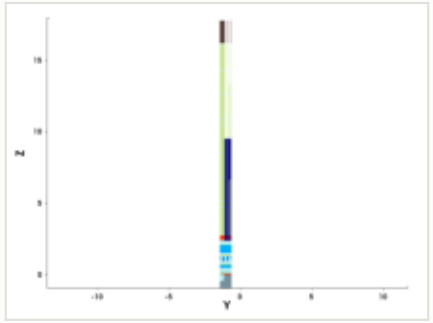

y cut at -1.035 µm

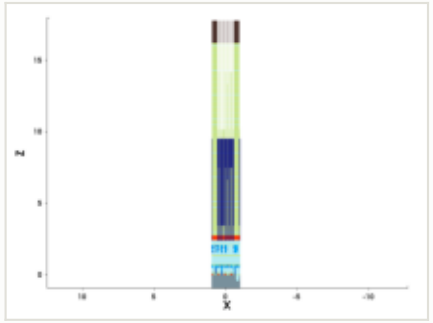

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

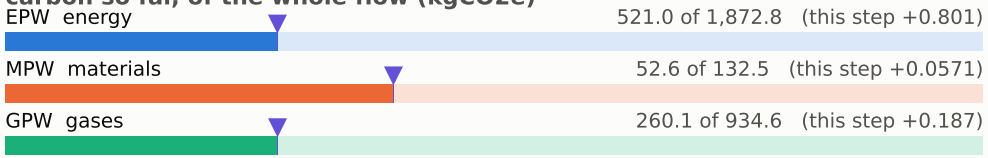

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

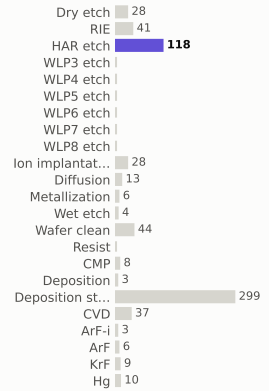

materials deposited (g)

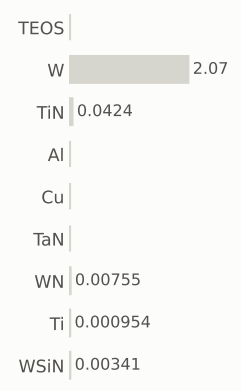

gases emitted (g)

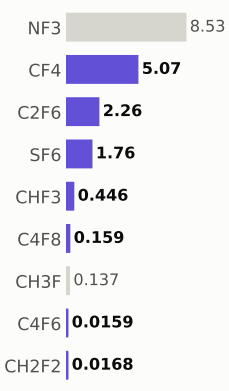

Step #8515.7047: HAR_etch

etch_noop · HAR_etch

1.04	834.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

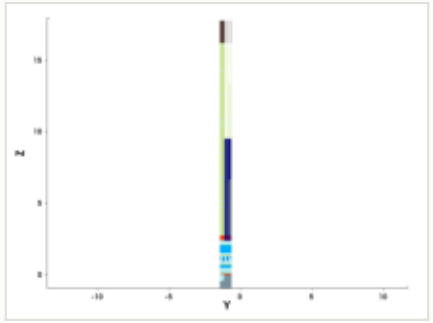

y cut at -1.035 µm

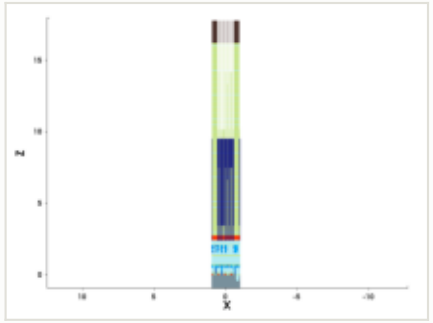

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

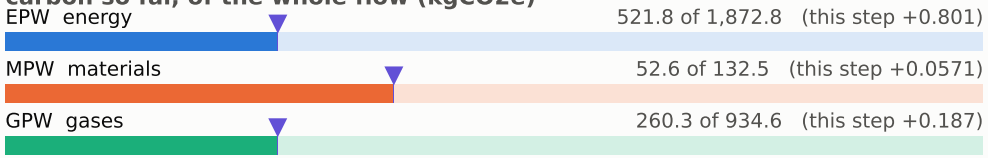

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

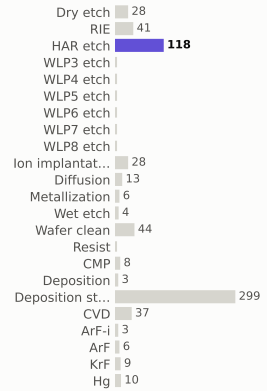

materials deposited (g)

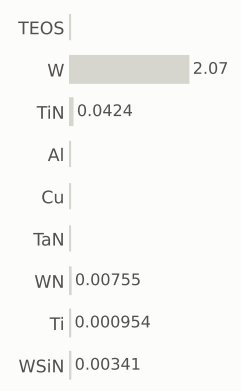

gases emitted (g)

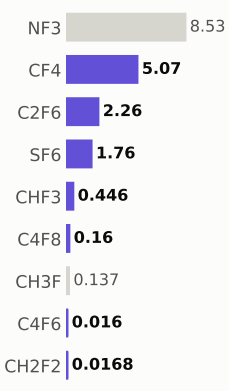

Step #8515.7718: HAR_etch

etch_noop · HAR_etch

1.04	835.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

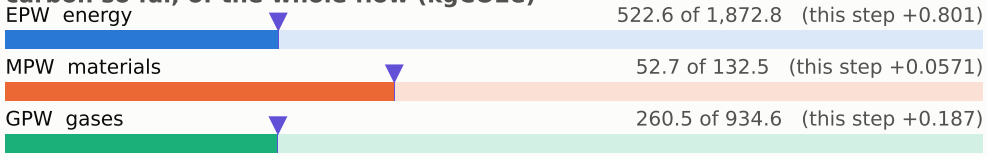

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

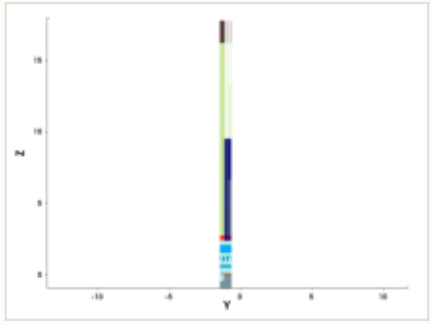

y cut at -1.035 µm

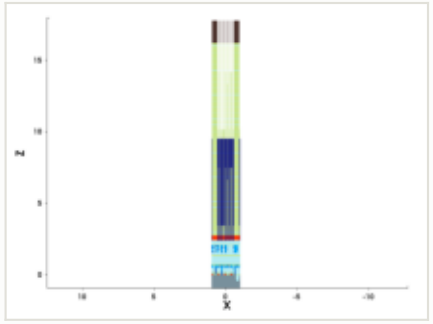

mask for this step

no mask for this step

steps by process area

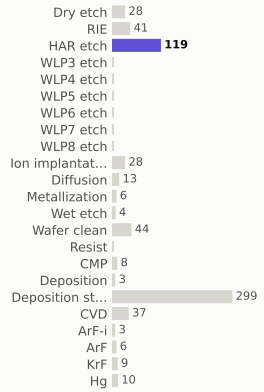

materials deposited (g)

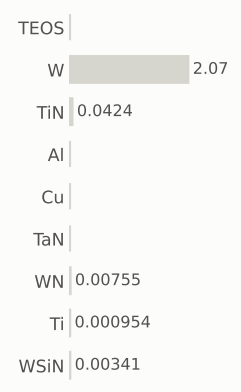

gases emitted (g)

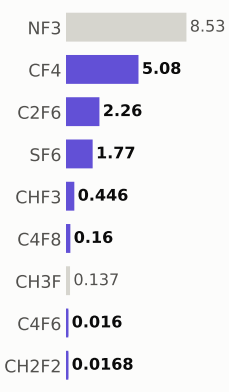

Step #8515.8389: HAR_etch

etch_noop · HAR_etch

1.04	836.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

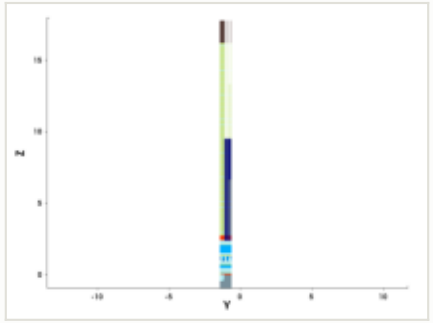

y cut at -1.035 µm

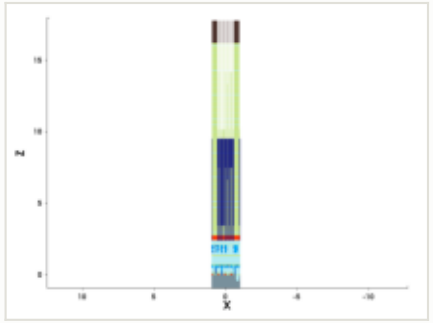

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

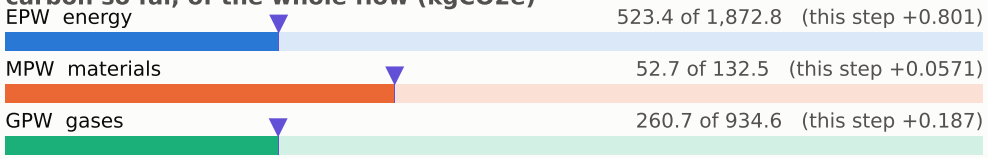

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

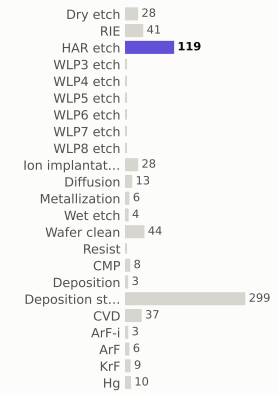

materials deposited (g)



gases emitted (g)

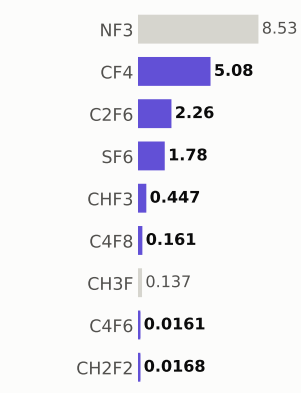

Step #8515.906: HAR_etch

etch_noop · HAR_etch

1.04	837.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

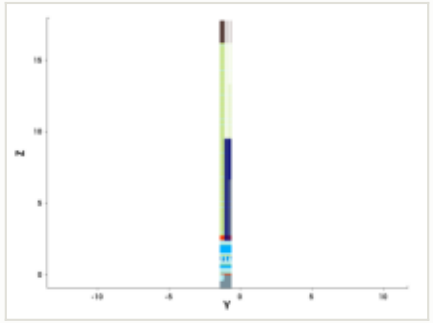

y cut at -1.035 µm

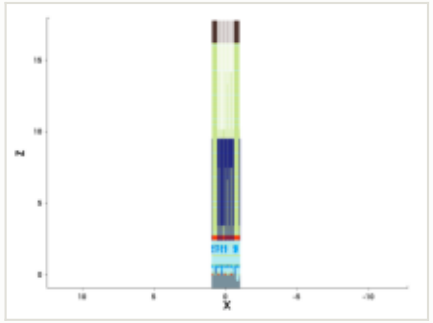

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

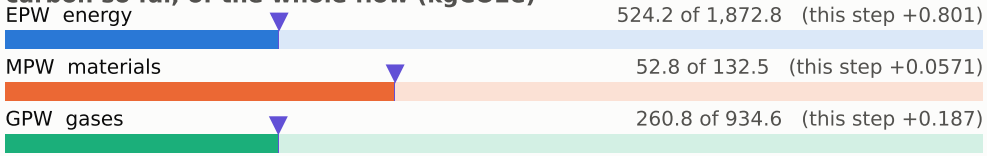

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

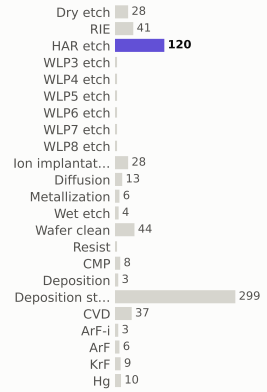

materials deposited (g)

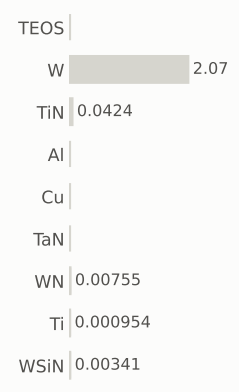

gases emitted (g)

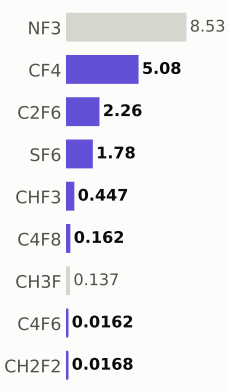

Step #8515.9732: HAR_etch

etch_noop · HAR_etch

1.04	838.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

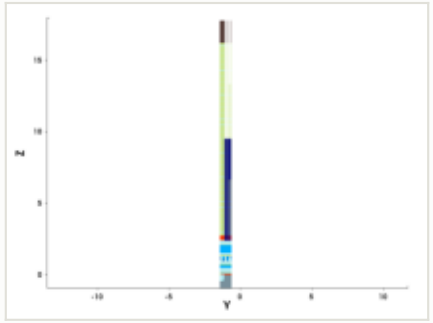

y cut at -1.035 µm

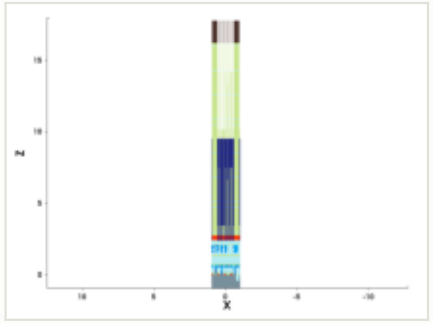

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

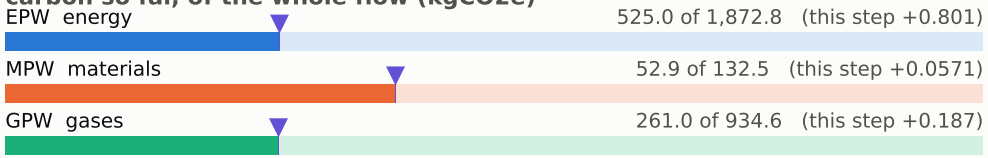

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

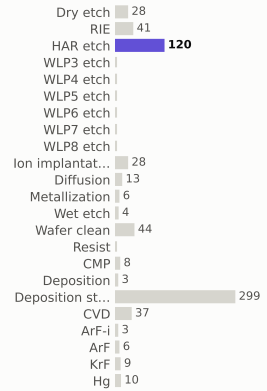

materials deposited (g)

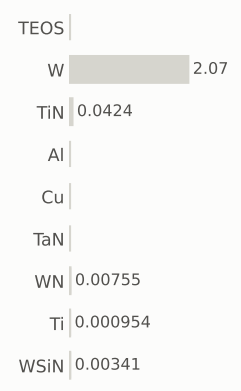

gases emitted (g)

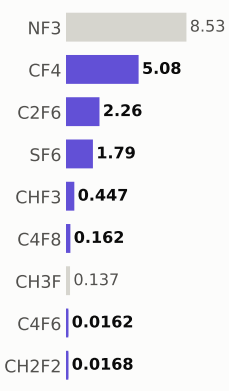

Step #8516.0403: HAR_etch

etch_noop · HAR_etch

1.04	839.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

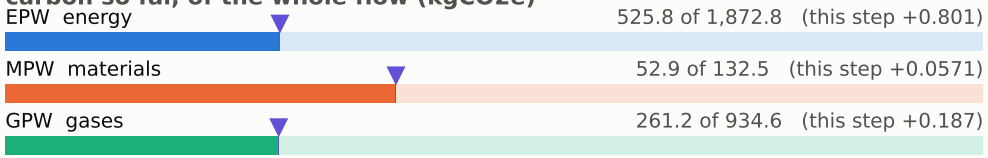

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

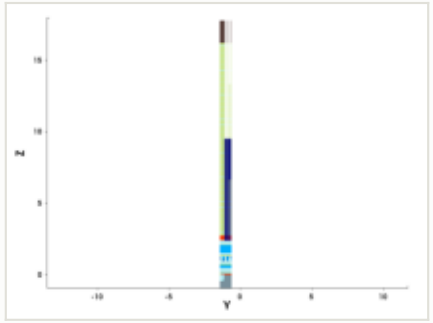

y cut at -1.035 µm

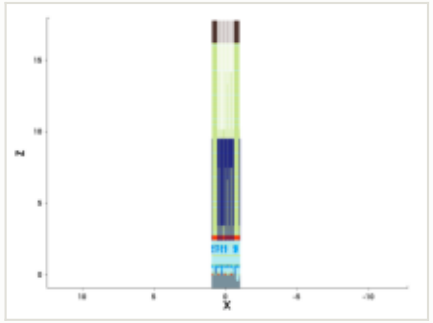

mask for this step

no mask for this step

steps by process area

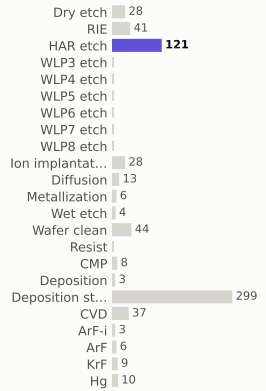

materials deposited (g)

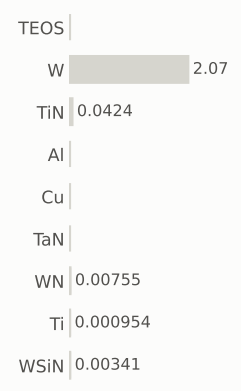

gases emitted (g)

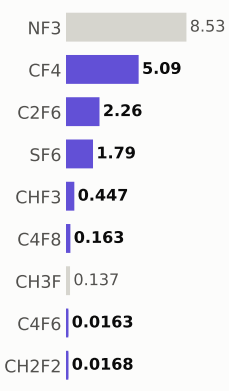

Step #8516.1074: HAR_etch

etch_noop · HAR_etch

1.04	840.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

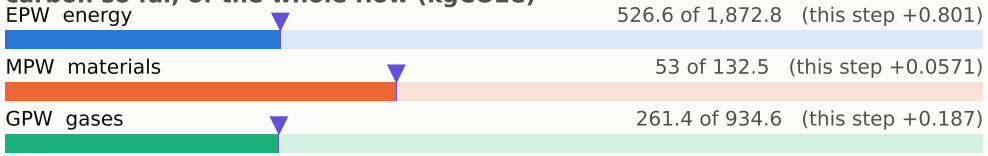

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

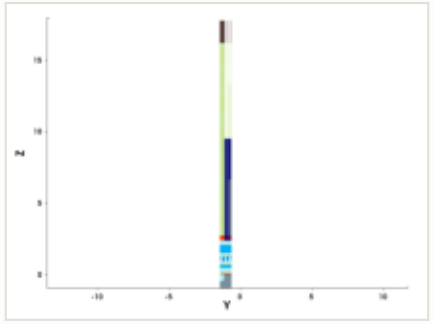

y cut at -1.035 µm

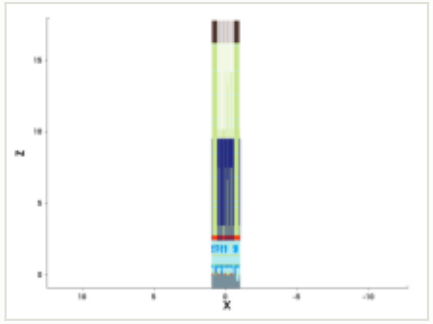

mask for this step

no mask for this step

steps by process area

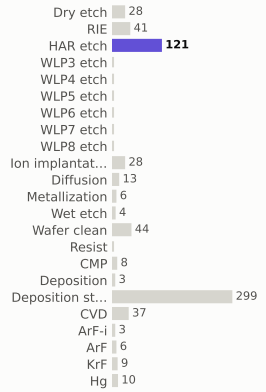

materials deposited (g)

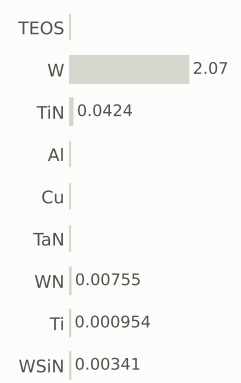

gases emitted (g)

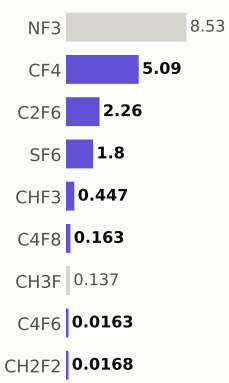

Step #8516.1745: HAR_etch

etch_noop · HAR_etch

1.04	842.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

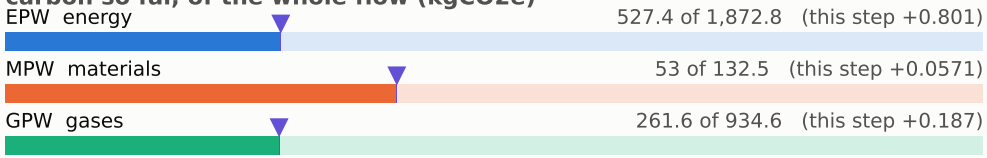

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

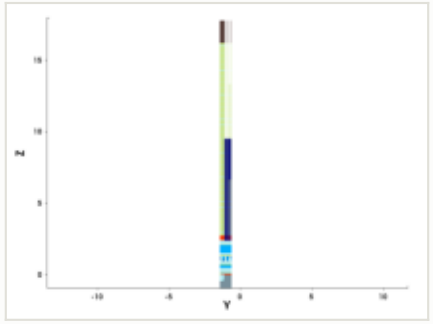

y cut at -1.035 µm

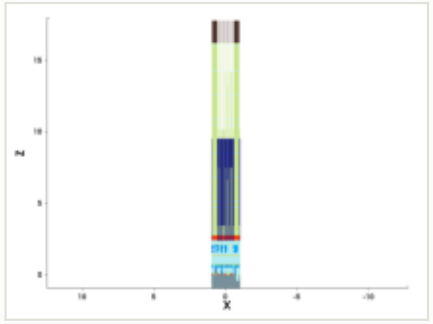

mask for this step

no mask for this step

steps by process area

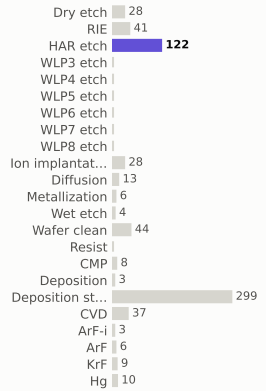

materials deposited (g)

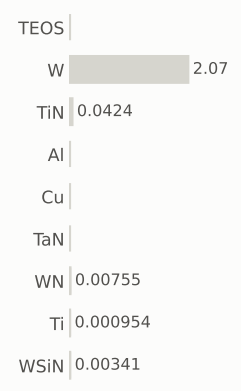

gases emitted (g)

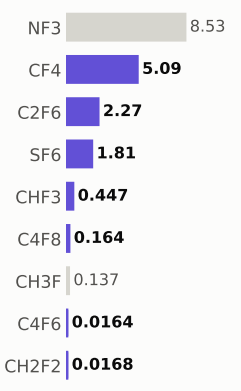

Step #8516.2416: HAR_etch

etch_noop · HAR_etch

1.04	843.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

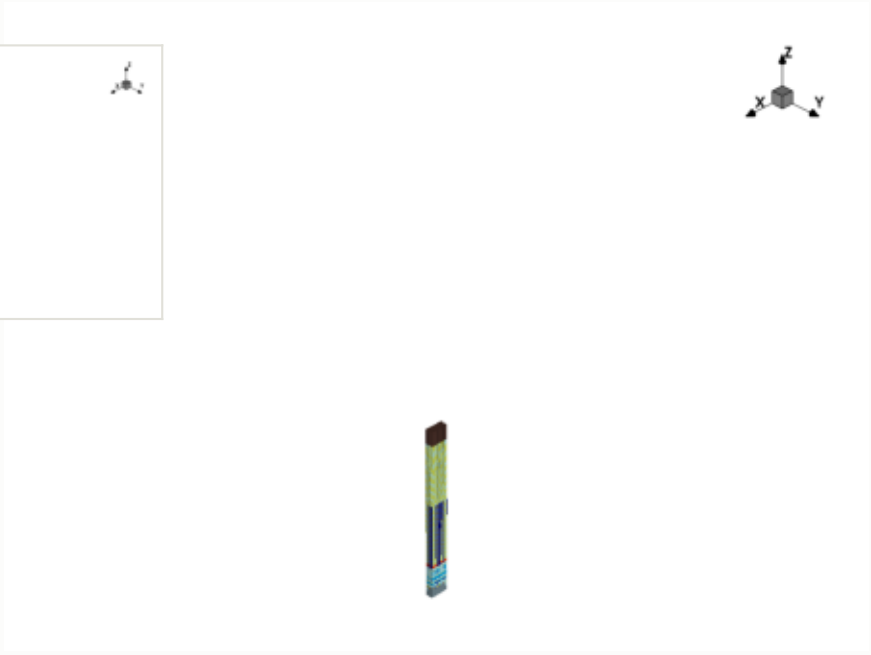

x cut at 0.000 µm

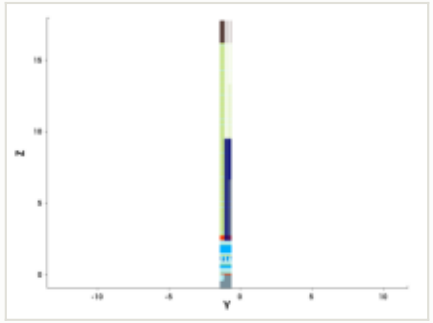

y cut at -1.035 µm

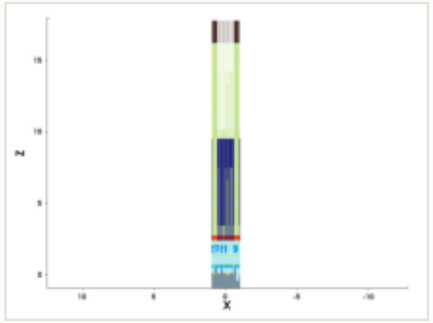

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

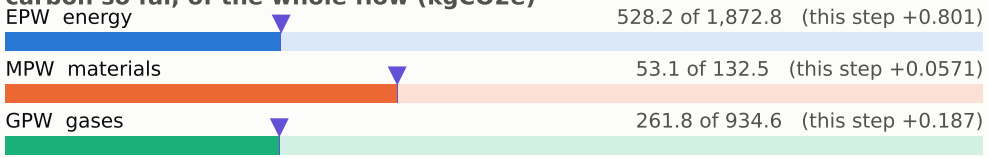

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

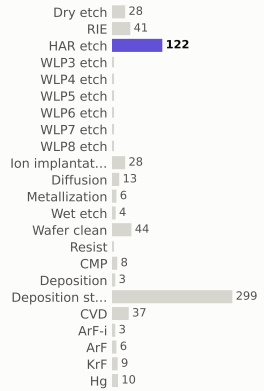

materials deposited (g)

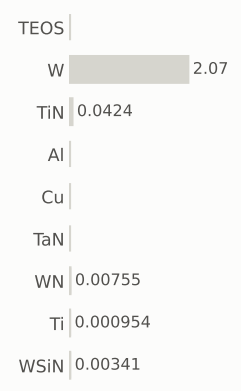

gases emitted (g)

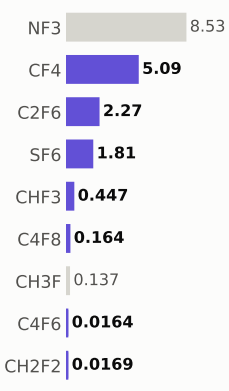

Step #8516.3087: HAR_etch

etch_noop · HAR_etch

1.04	844.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

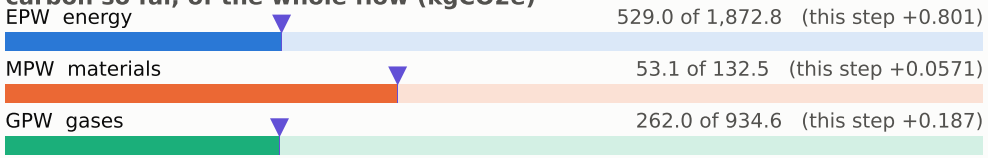

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

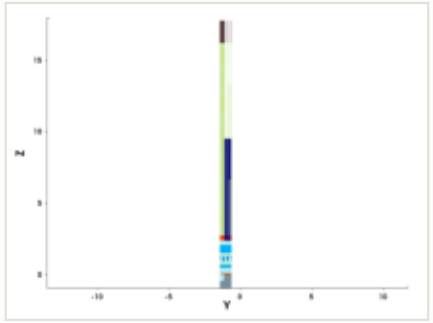

y cut at -1.035 µm

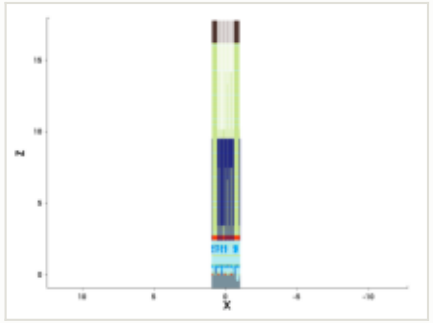

mask for this step

no mask for this step

steps by process area

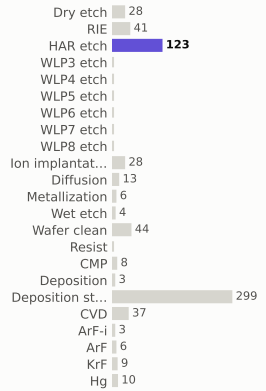

materials deposited (g)

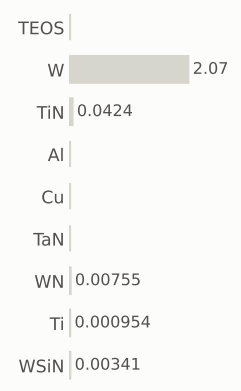

gases emitted (g)

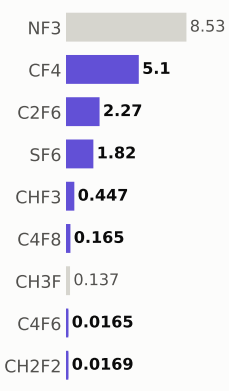

Step #8516.3758: HAR_etch

etch_noop · HAR_etch

1.04	845.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

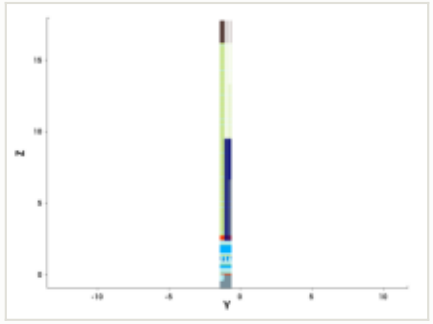

y cut at -1.035 µm

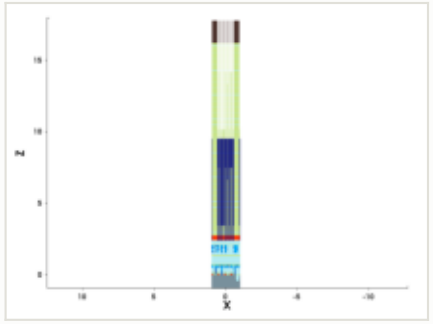

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

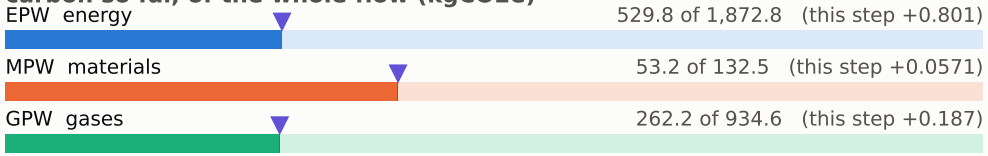

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

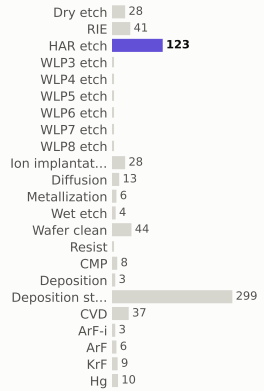

materials deposited (g)

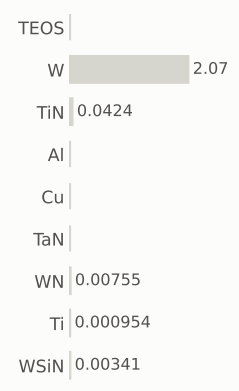

gases emitted (g)



Step #8516.443: HAR_etch

etch_noop · HAR_etch

1.04	846.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

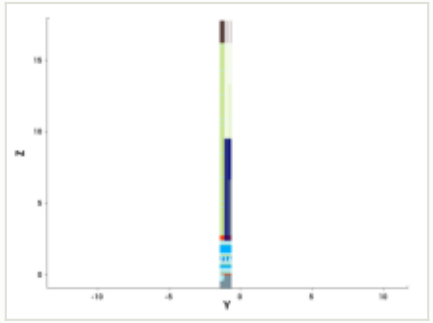

y cut at -1.035 µm

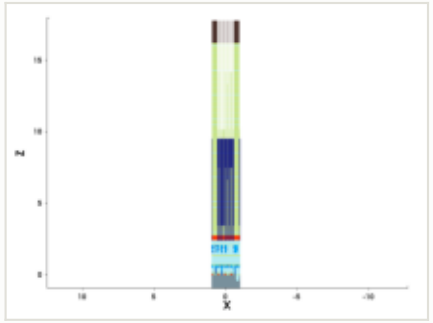

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

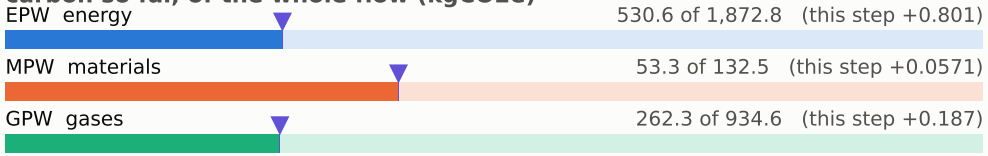

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

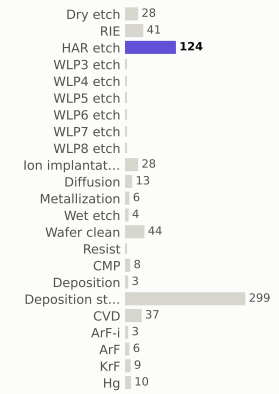

materials deposited (g)



gases emitted (g)

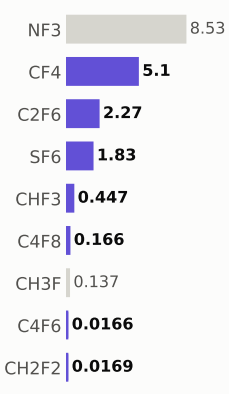

Step #8516.5101: HAR_etch

etch_noop · HAR_etch

1.04	847.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

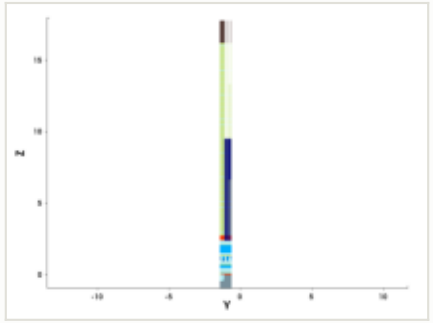

y cut at -1.035 µm

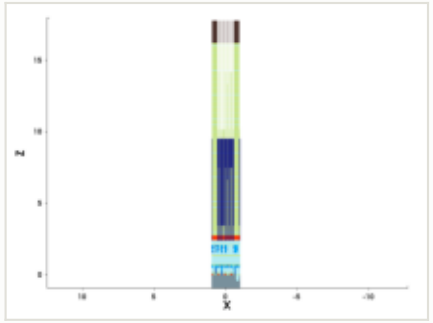

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

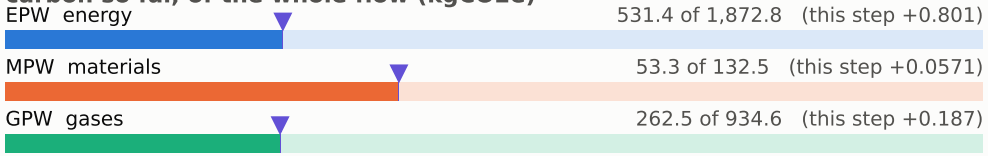

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

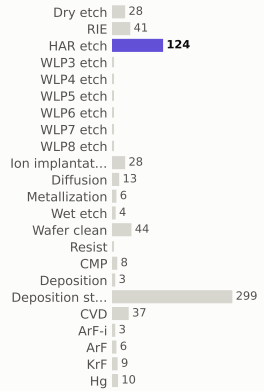

materials deposited (g)

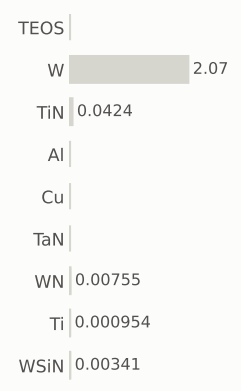

gases emitted (g)

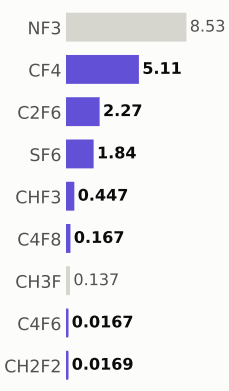

Step #8516.5772: HAR_etch

etch_noop · HAR_etch

1.04	848.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

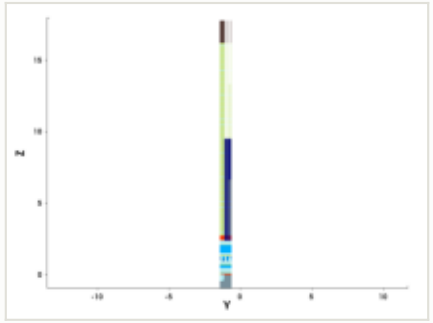

y cut at -1.035 µm

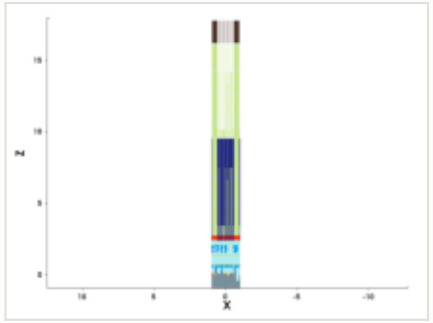

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

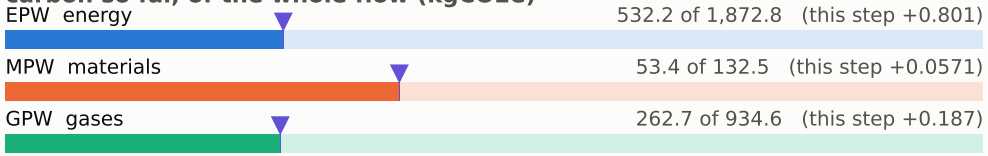

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

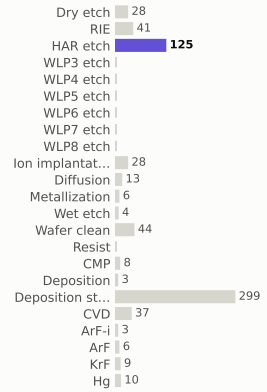

materials deposited (g)

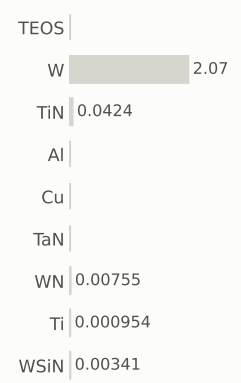

gases emitted (g)

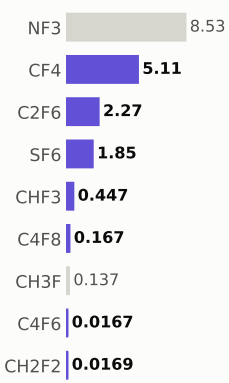

Step #8516.6443: HAR_etch

etch_noop · HAR_etch

1.04	849.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

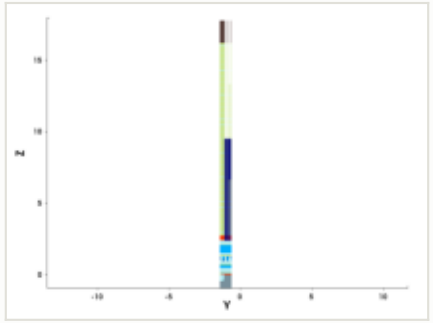

y cut at -1.035 µm

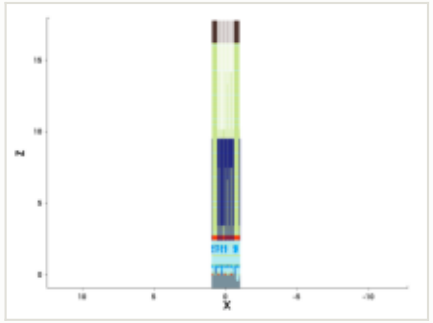

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

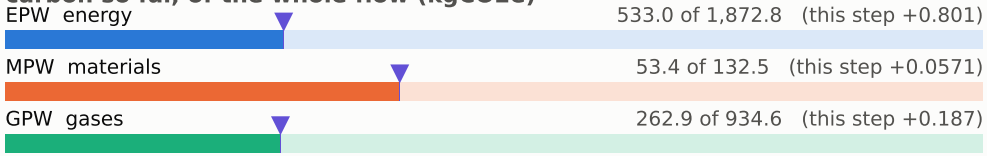

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

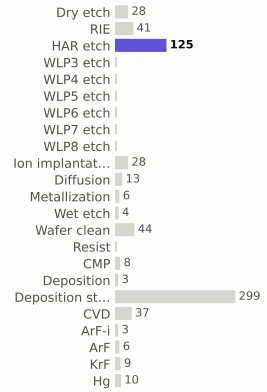

materials deposited (g)

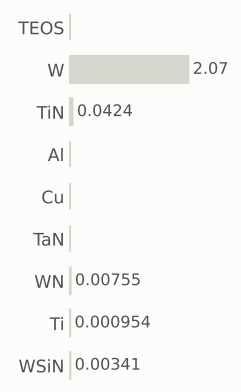

gases emitted (g)

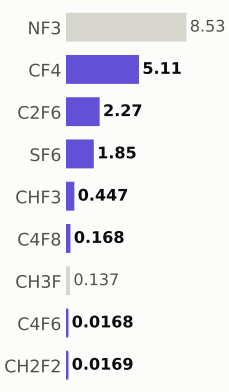

Step #8516.7114: HAR_etch

etch_noop · HAR_etch

1.04	850.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

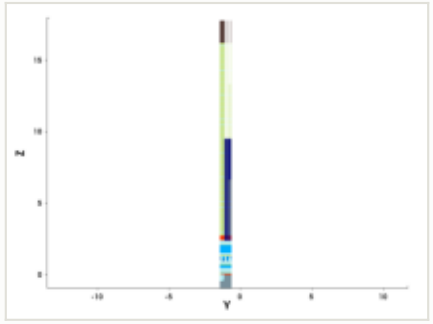

y cut at -1.035 µm

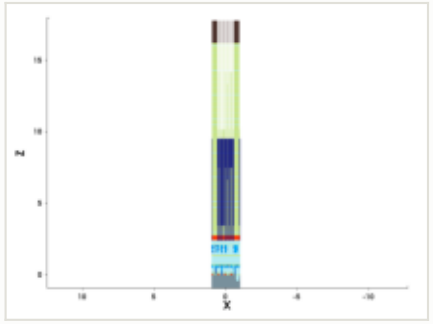

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

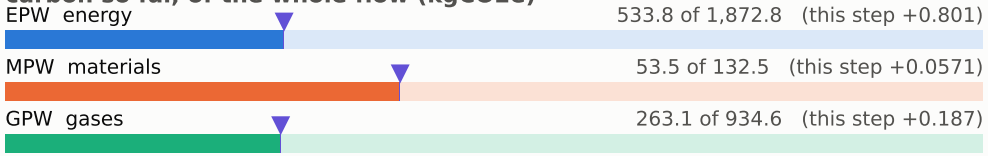

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

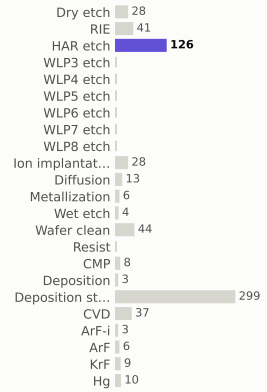

materials deposited (g)

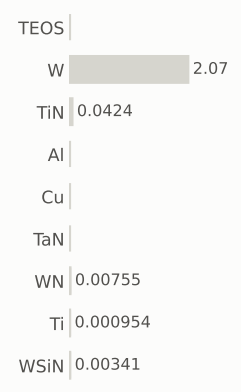

gases emitted (g)

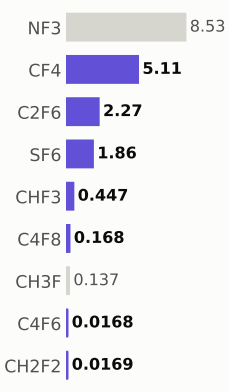

Step #8516.7785: HAR_etch

etch_noop · HAR_etch

1.04	851.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

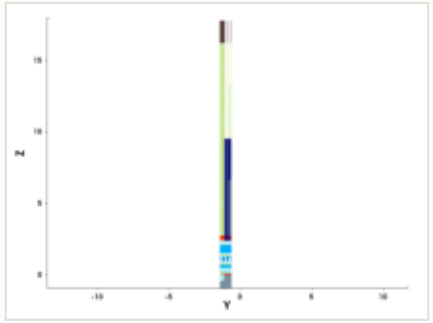

y cut at -1.035 µm

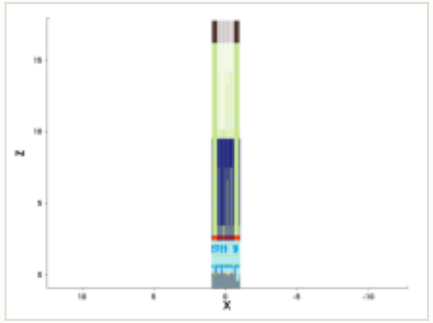

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

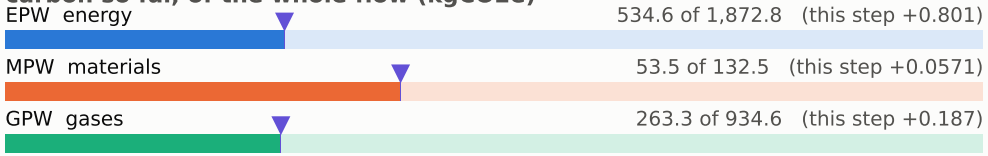

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

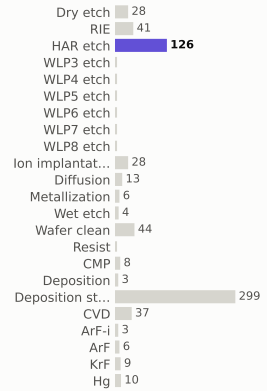

materials deposited (g)

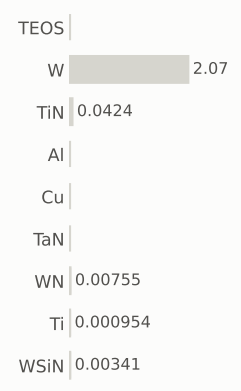

gases emitted (g)

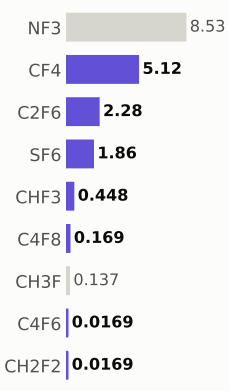

Step #8516.8456: HAR_etch

etch_noop · HAR_etch

1.04	852.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

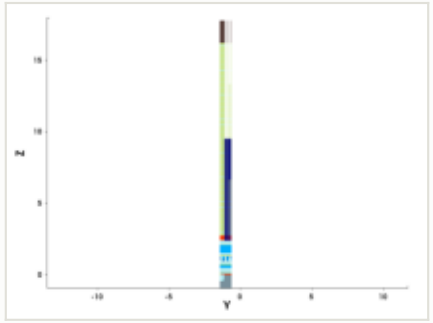

y cut at -1.035 µm

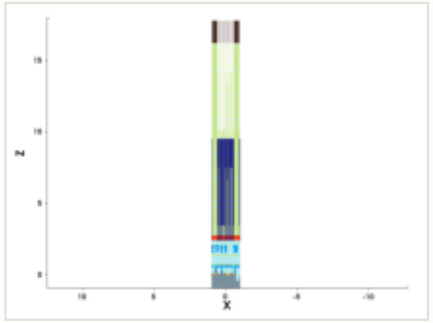

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

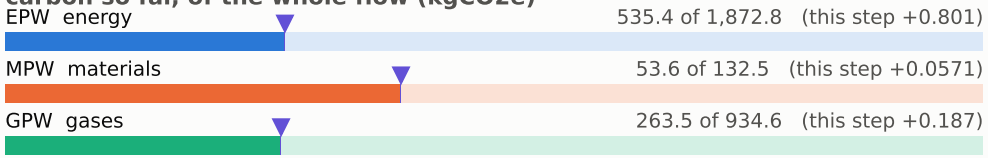

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

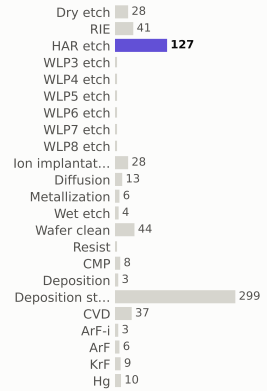

materials deposited (g)

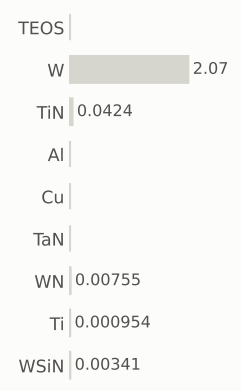

gases emitted (g)

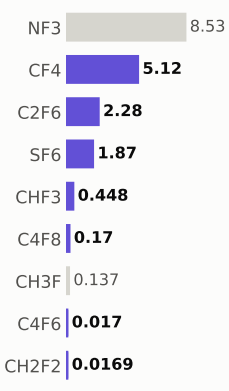

Step #8516.9128: HAR_etch

etch_noop · HAR_etch

1.04	853.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

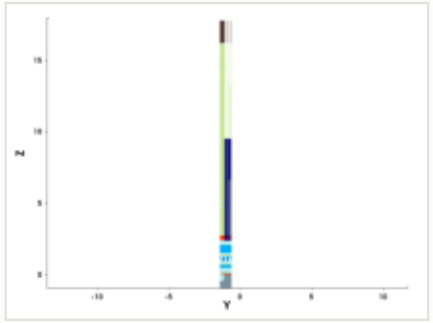

y cut at -1.035 µm

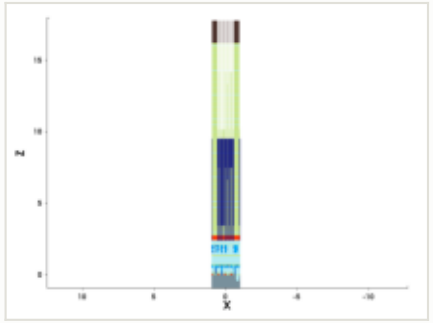

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

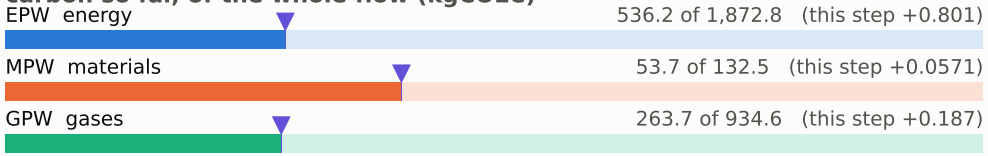

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

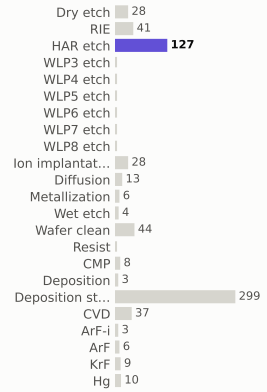

materials deposited (g)

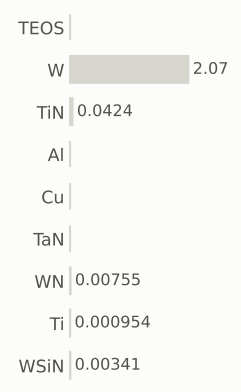

gases emitted (g)

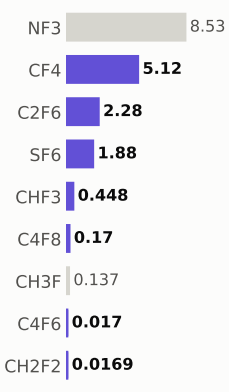

Step #8516.9799: HAR_etch

etch_noop · HAR_etch

1.04	854.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

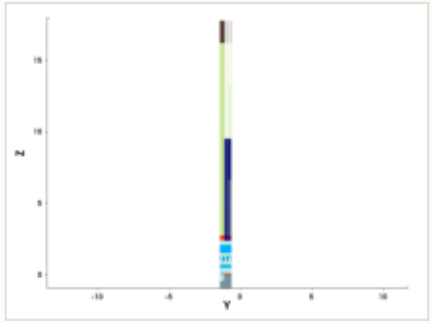

y cut at -1.035 µm

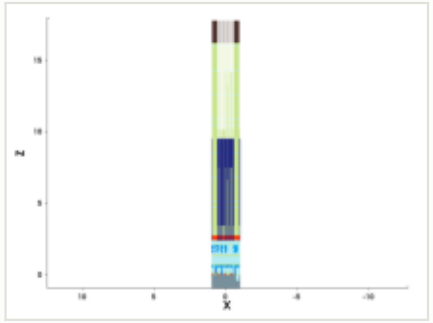

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

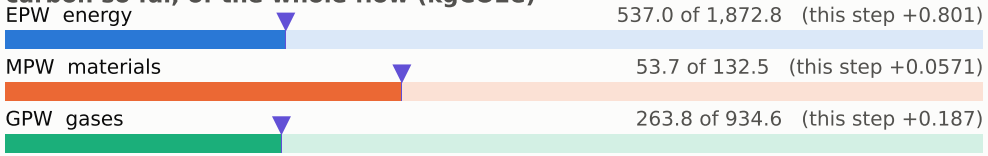

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

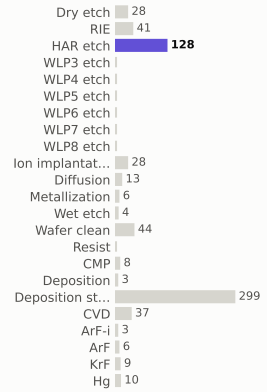

materials deposited (g)

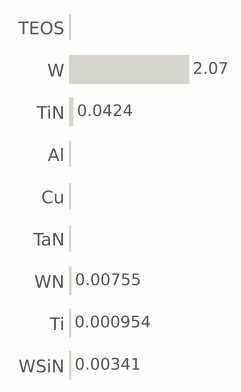

gases emitted (g)

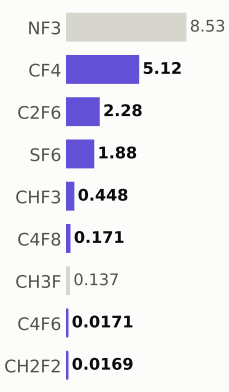

Step #8517.047: HAR_etch

etch_noop · HAR_etch

1.04	855.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

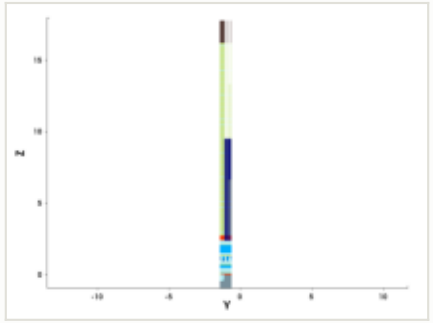

y cut at -1.035 µm

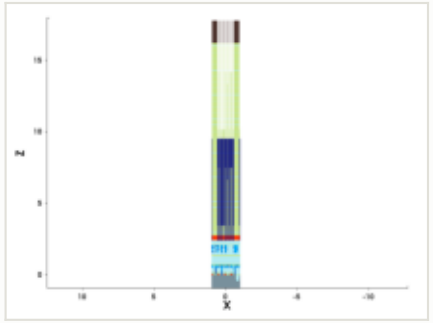

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

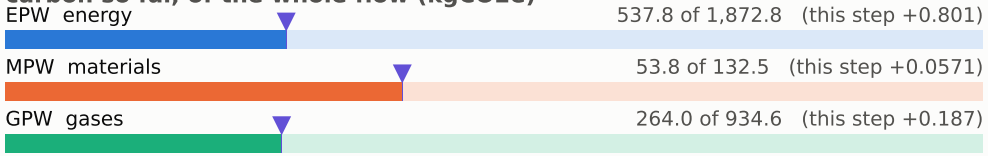

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

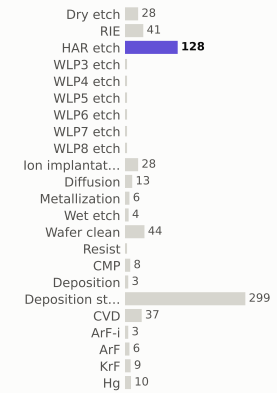

materials deposited (g)

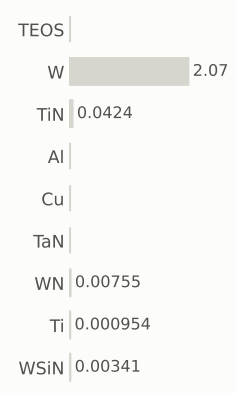

gases emitted (g)

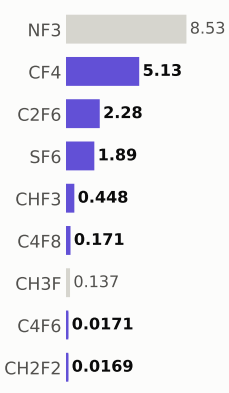

Step #8517.1141: HAR_etch

etch_noop · HAR_etch

1.04	856.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

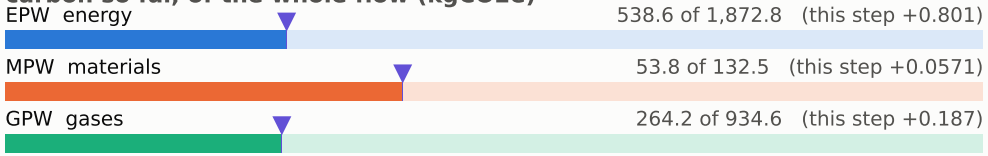

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

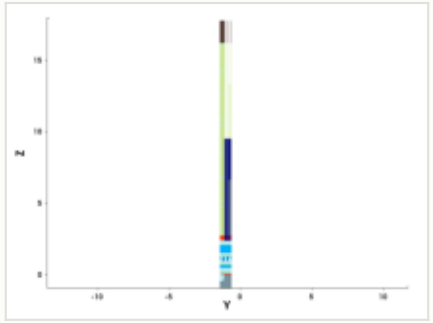

y cut at -1.035 µm

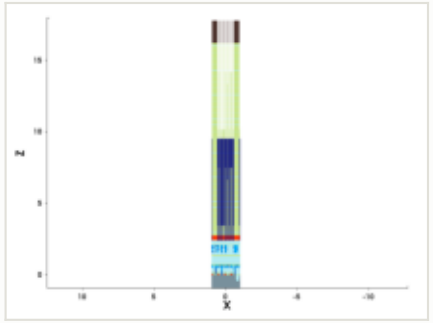

mask for this step

no mask for this step

steps by process area

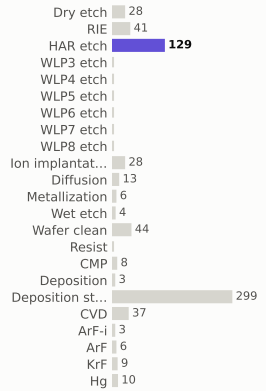

materials deposited (g)

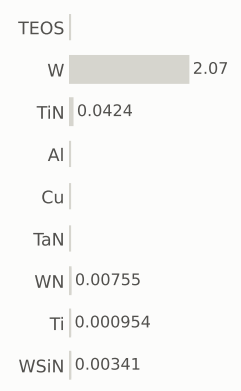

gases emitted (g)

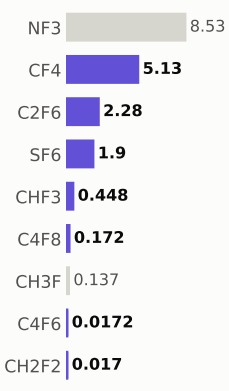

Step #8517.1812: HAR_etch

etch_noop · HAR_etch

1.04	857.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

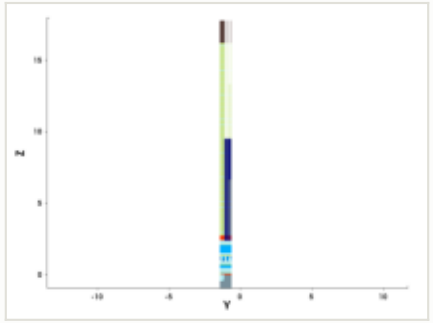

y cut at -1.035 µm

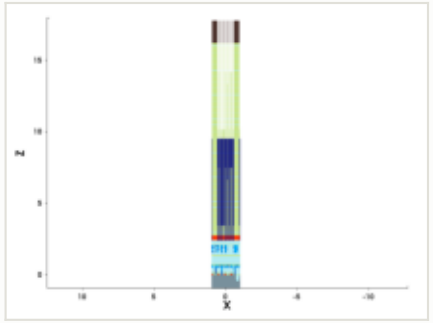

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

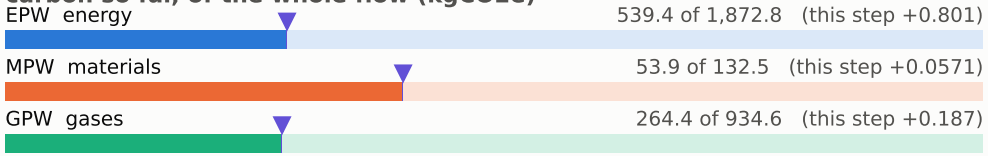

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

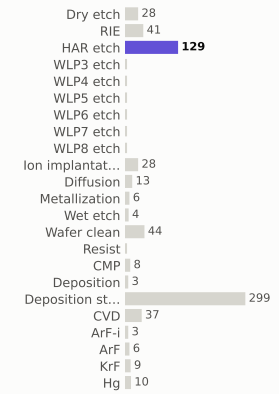

materials deposited (g)



gases emitted (g)



Step #8517.2483: HAR_etch

etch_noop · HAR_etch

1.04	858.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

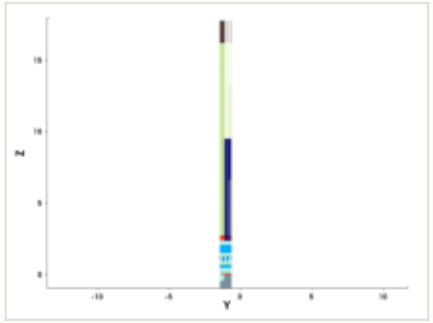

y cut at -1.035 µm

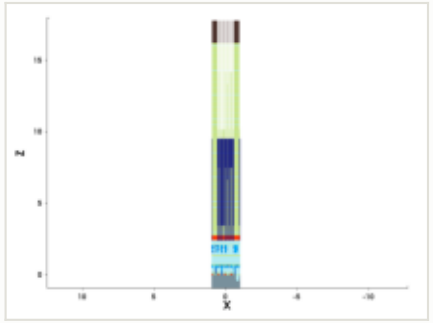

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

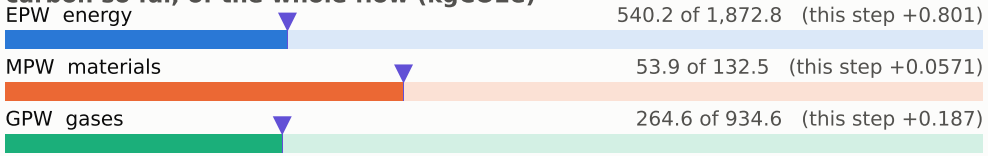

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

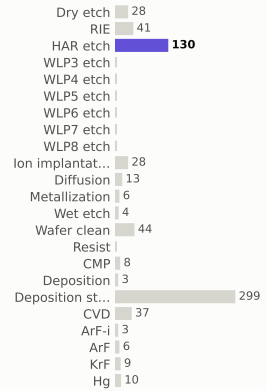

materials deposited (g)

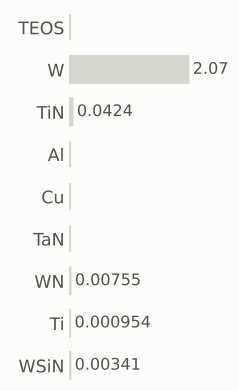

gases emitted (g)

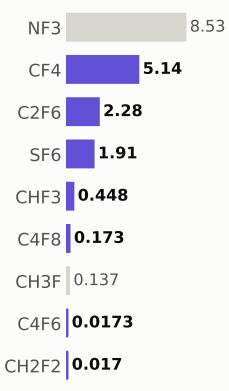

Step #8517.3154: HAR_etch

etch_noop · HAR_etch

1.04	859.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

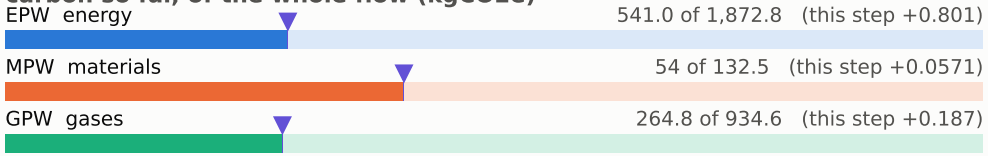

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

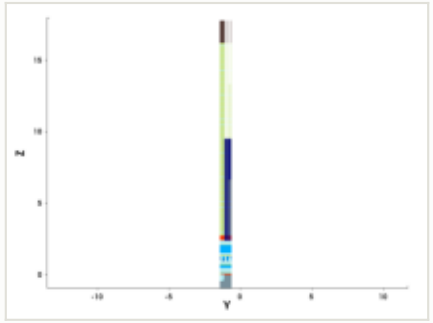

y cut at -1.035 µm

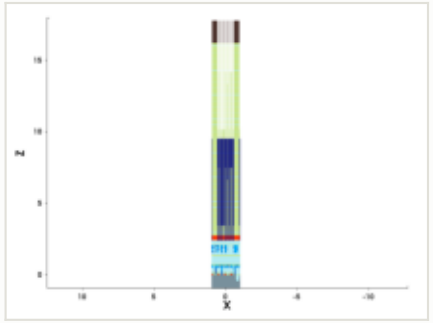

mask for this step

no mask for this step

steps by process area

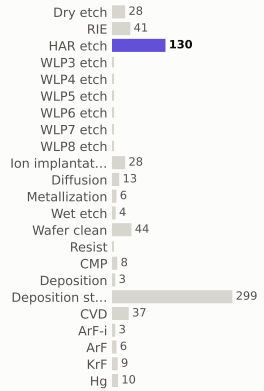

materials deposited (g)

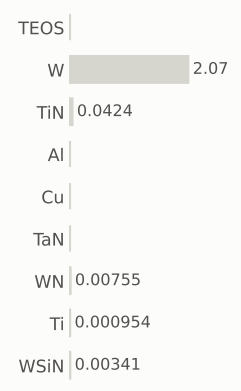

gases emitted (g)

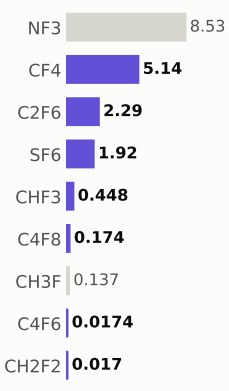

Step #8517.3826: HAR_etch

etch_noop · HAR_etch

1.04	860.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

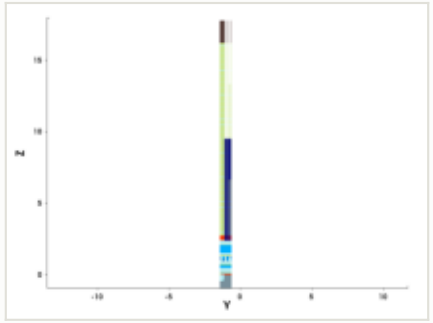

y cut at -1.035 µm

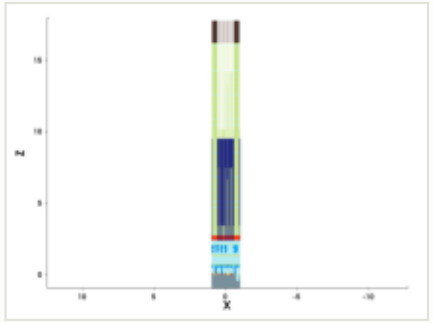

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

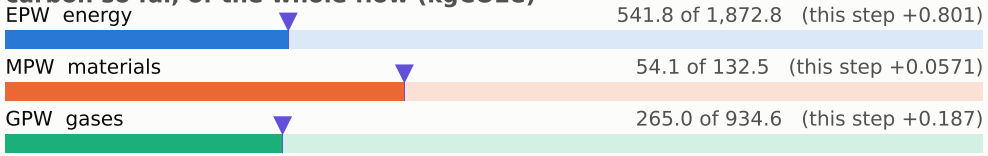

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

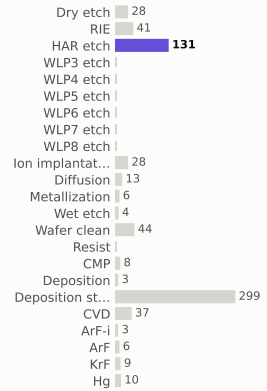

materials deposited (g)

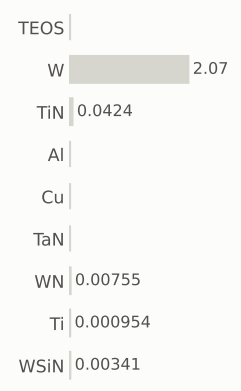

gases emitted (g)

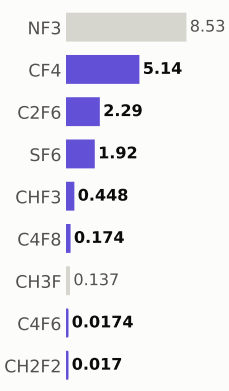

Step #8517.4497: HAR_etch

etch_noop · HAR_etch

1.04	861.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

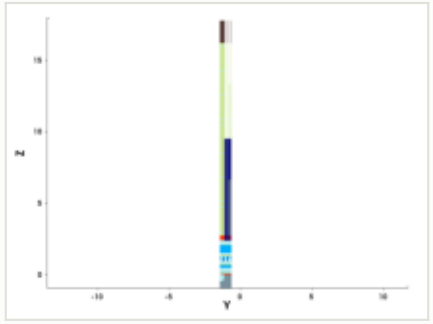

y cut at -1.035 µm

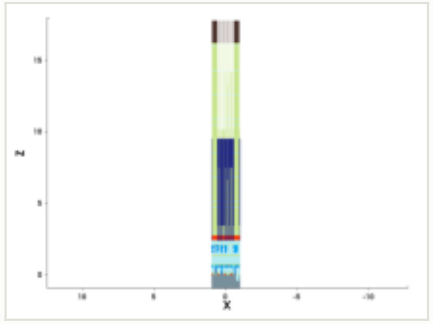

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

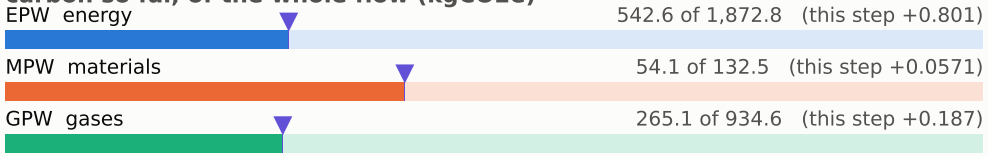

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

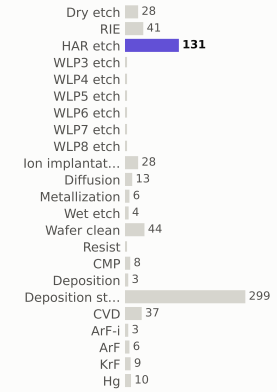

materials deposited (g)

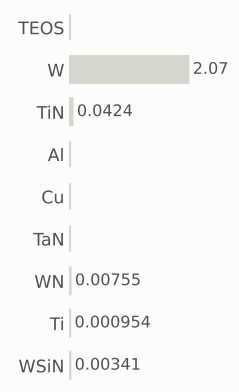

gases emitted (g)

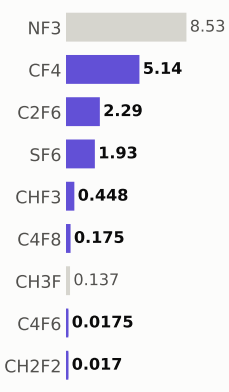

Step #8517.5168: HAR_etch

etch_noop · HAR_etch

1.04	862.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

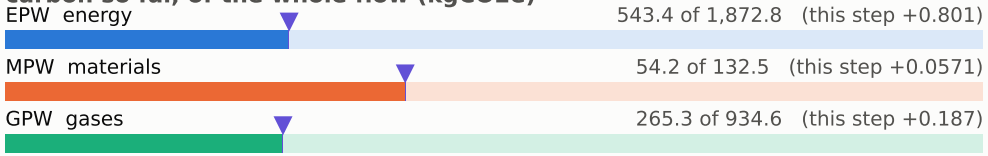

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

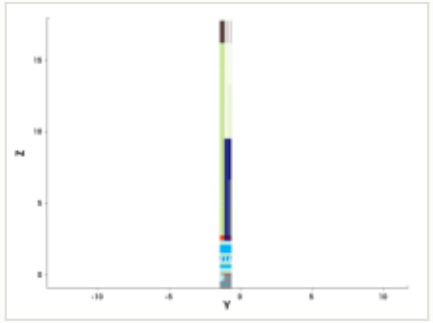

y cut at -1.035 µm

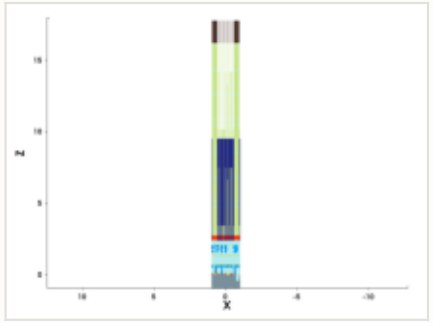

mask for this step

no mask for this step

steps by process area

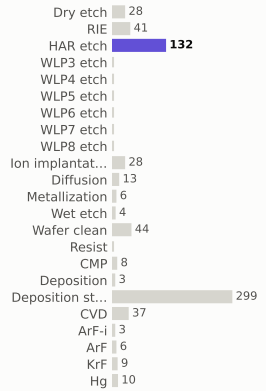

materials deposited (g)

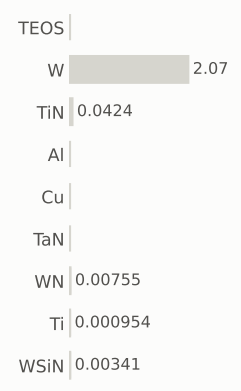

gases emitted (g)

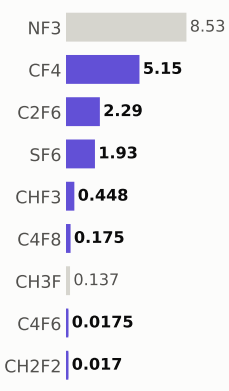

Step #8517.5839: HAR_etch

etch_noop · HAR_etch

1.04	863.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

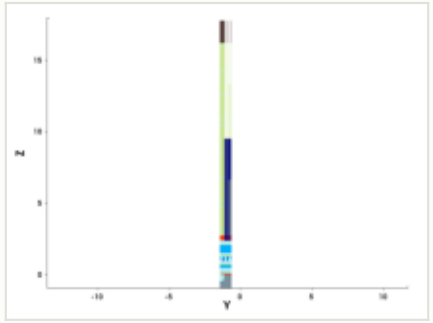

y cut at -1.035 µm

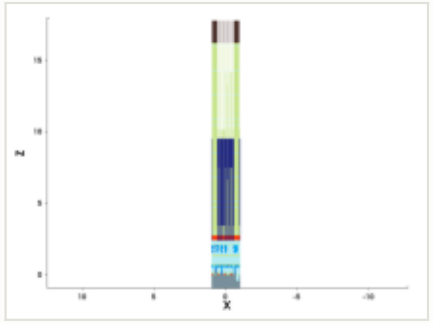

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

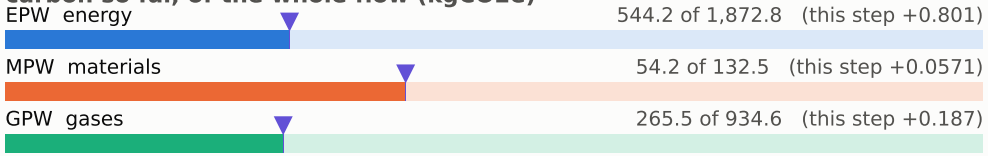

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

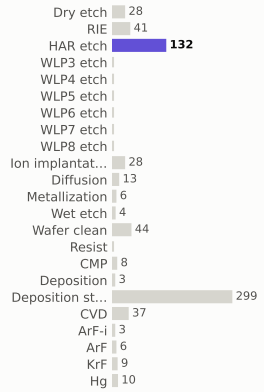

materials deposited (g)

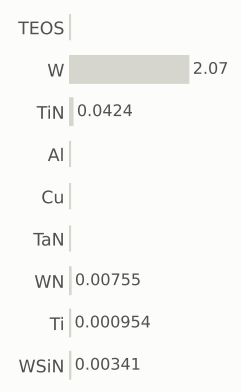

gases emitted (g)

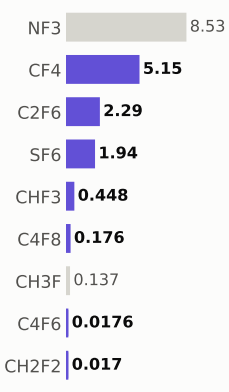

Step #8517.651: HAR_etch

etch_noop · HAR_etch

1.04	865.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

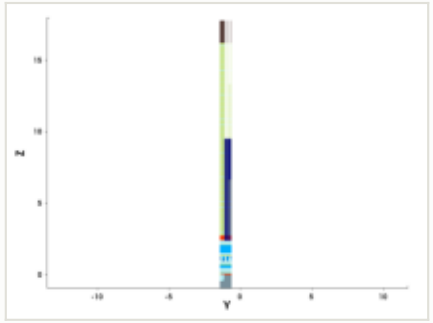

y cut at -1.035 µm

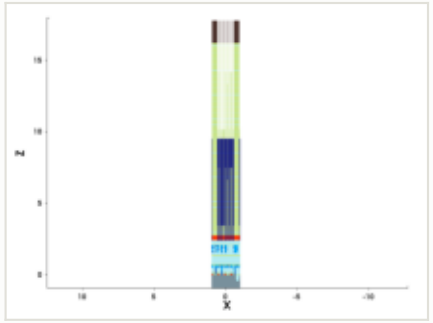

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

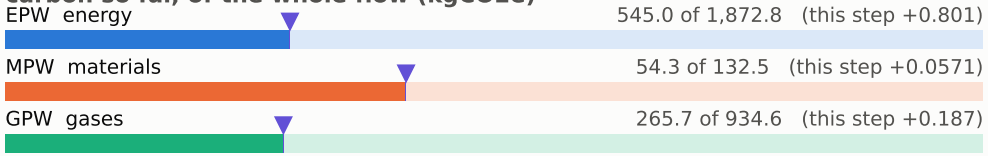

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

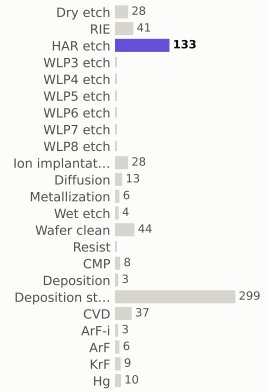

materials deposited (g)

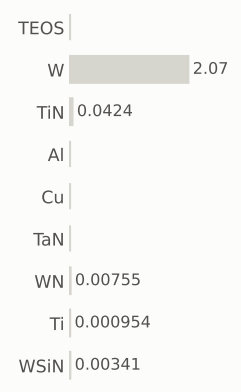

gases emitted (g)

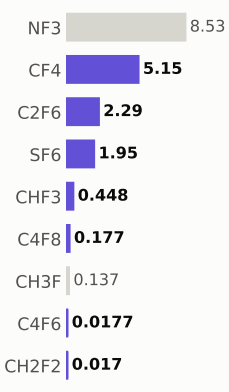

Step #8517.7181: HAR_etch

etch_noop · HAR_etch

1.04	866.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

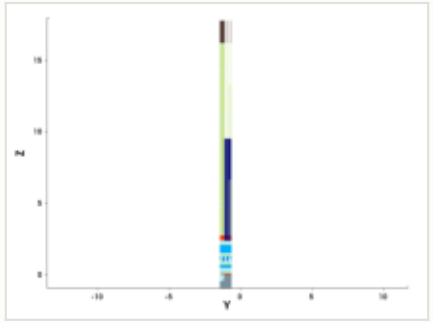

y cut at -1.035 µm

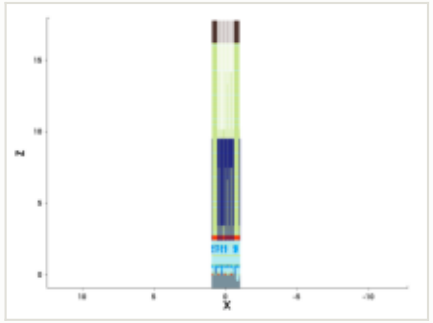

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

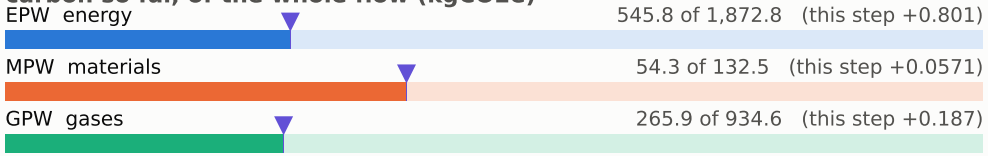

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

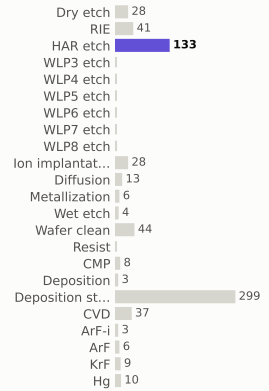

materials deposited (g)

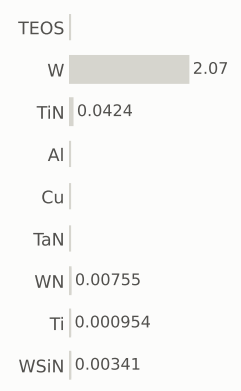

gases emitted (g)

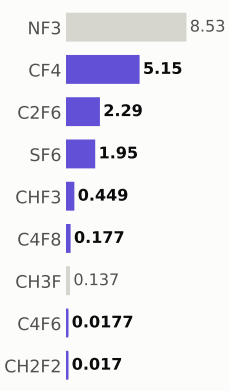

Step #8517.7852: HAR_etch

etch_noop · HAR_etch

1.04	867.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

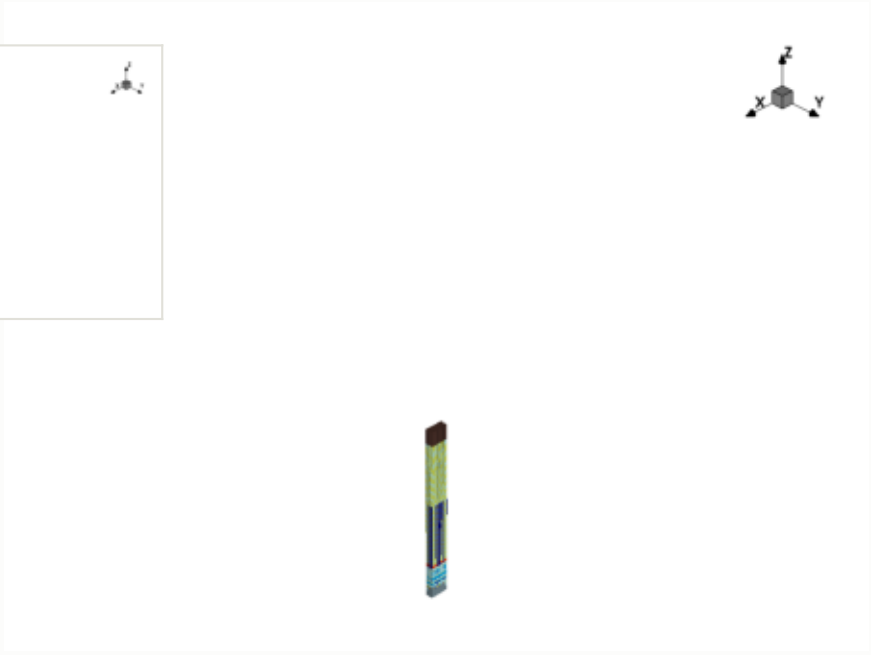

x cut at 0.000 µm

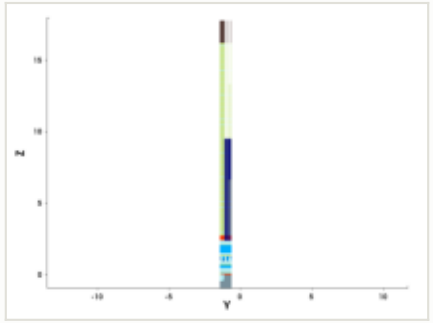

y cut at -1.035 µm

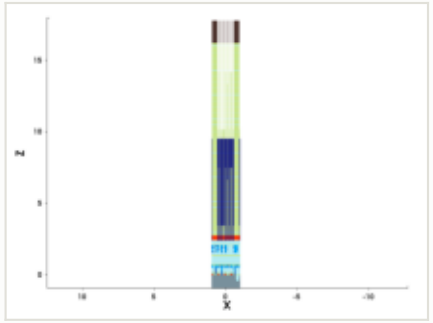

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

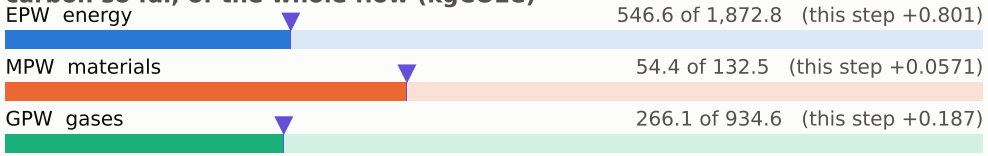

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

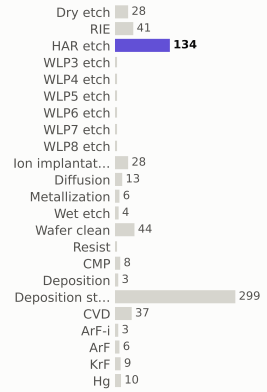

materials deposited (g)

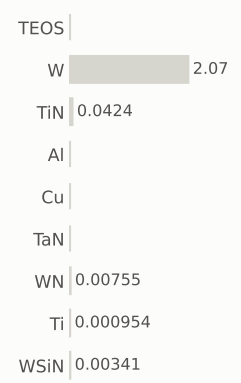

gases emitted (g)

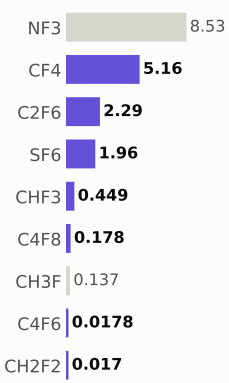

Step #8517.8523: HAR_etch

etch_noop · HAR_etch

1.04	868.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

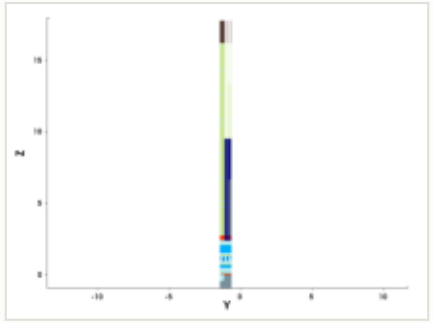

y cut at -1.035 µm

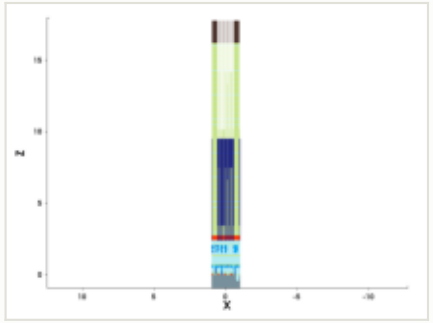

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

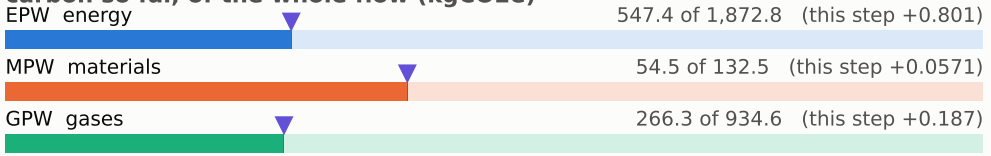

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

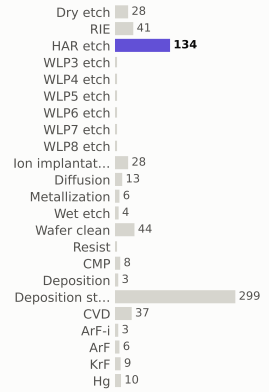

materials deposited (g)

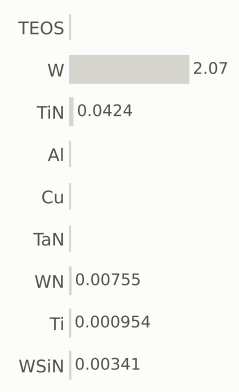

gases emitted (g)

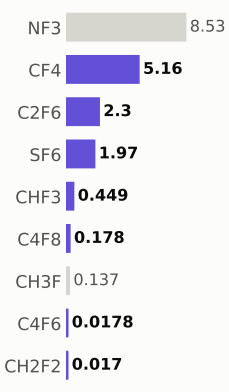

Step #8517.9195: HAR_etch

etch_noop · HAR_etch

1.04	869.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

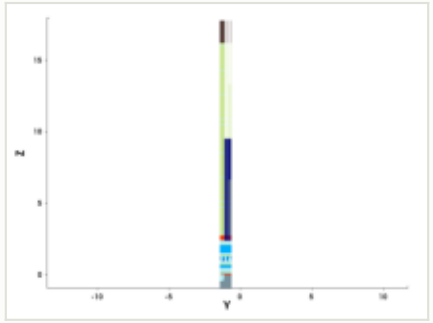

y cut at -1.035 µm

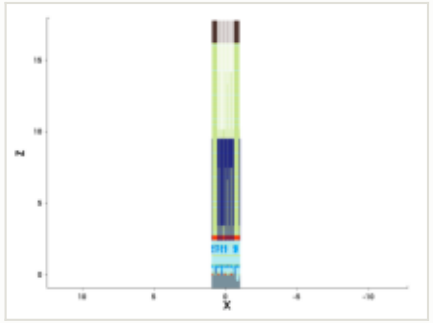

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

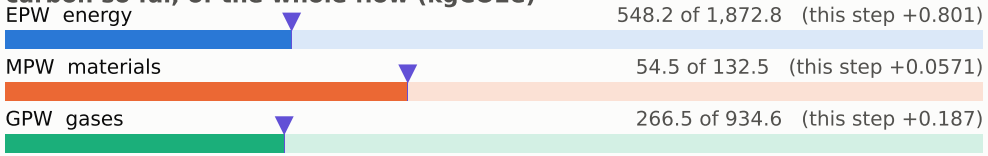

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

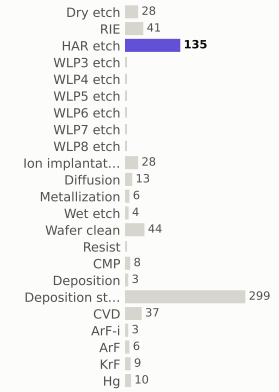

materials deposited (g)

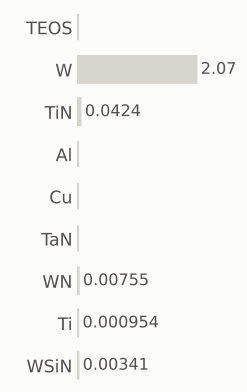

gases emitted (g)

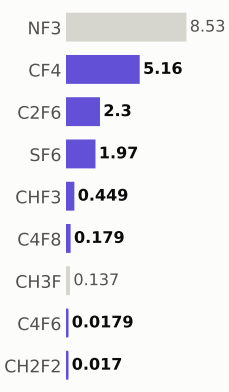

Step #8517.9866: HAR_etch

etch_noop · HAR_etch

1.04	870.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

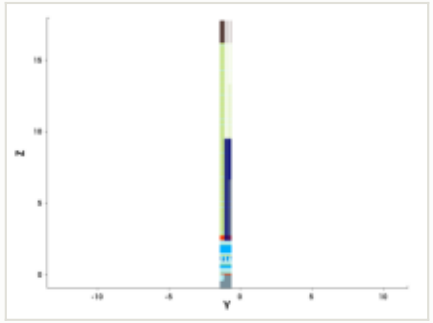

y cut at -1.035 µm

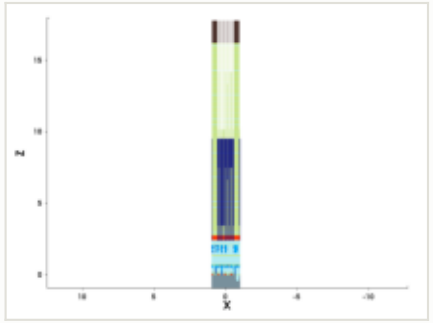

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

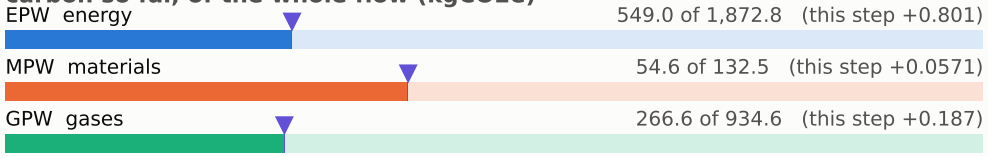

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

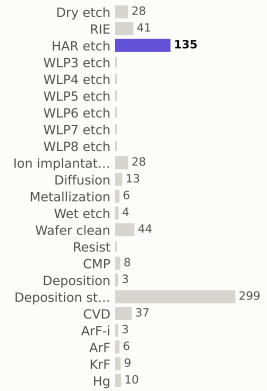

materials deposited (g)

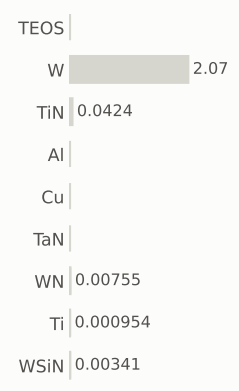

gases emitted (g)

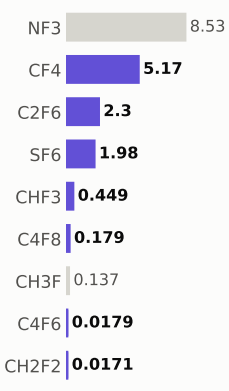

Step #8518.0537: HAR_etch

etch_noop · HAR_etch

1.04	871.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

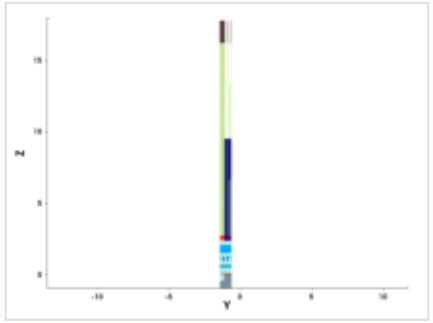

y cut at -1.035 µm

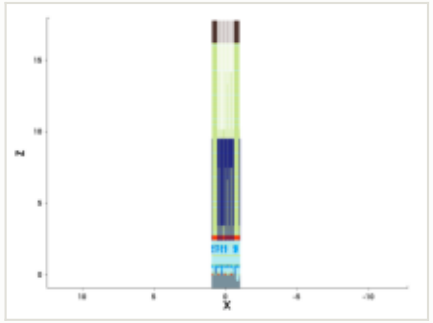

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

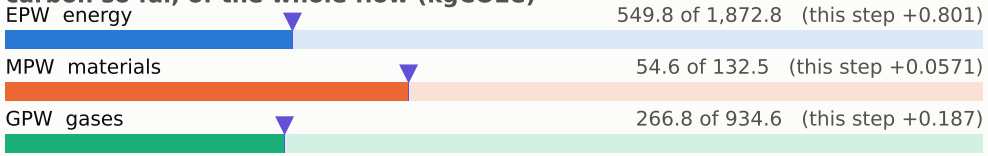

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

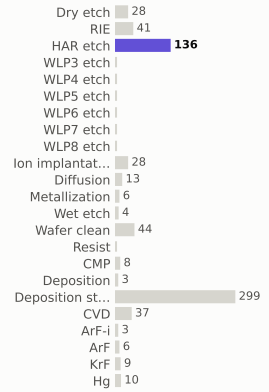

materials deposited (g)

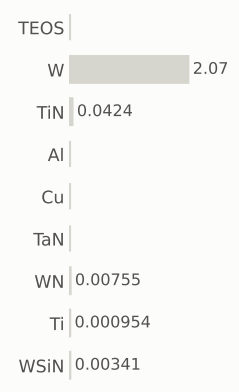

gases emitted (g)

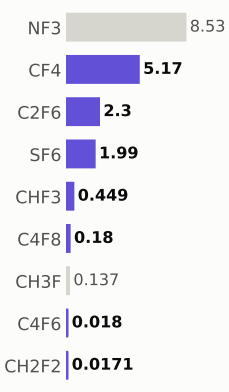

Step #8518.1208: HAR_etch

etch_noop · HAR_etch

1.04	872.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

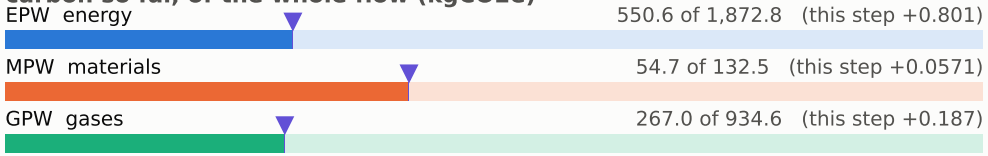

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

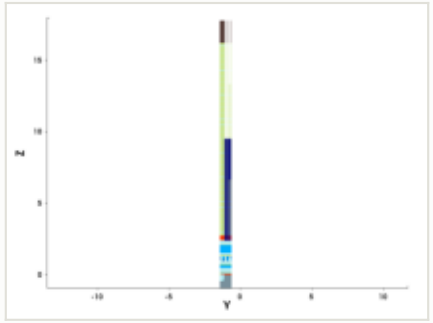

y cut at -1.035 µm

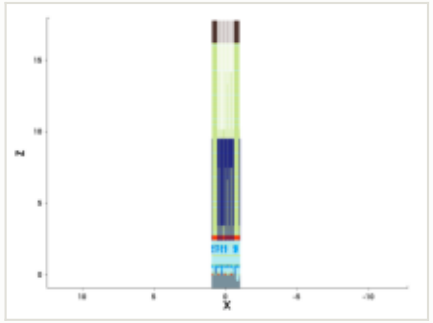

mask for this step

no mask for this step

steps by process area

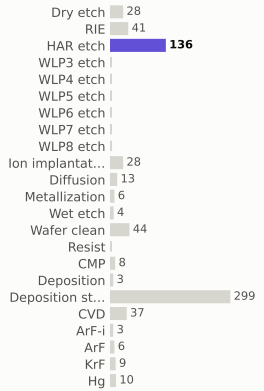

materials deposited (g)

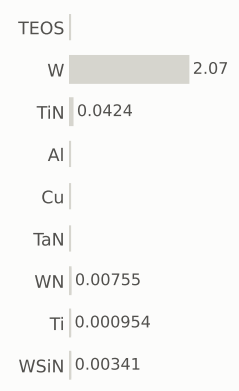

gases emitted (g)

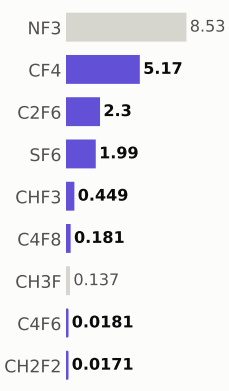

Step #8518.1879: HAR_etch

etch_noop · HAR_etch

1.04	873.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

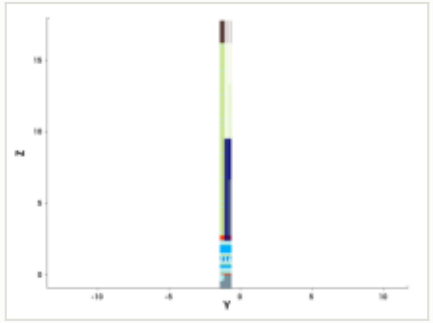

y cut at -1.035 µm

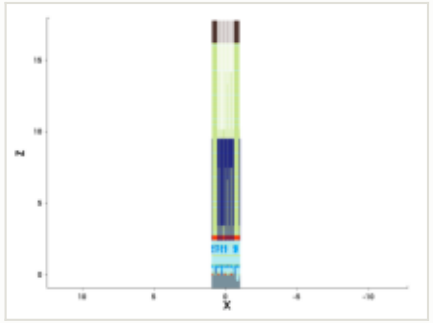

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

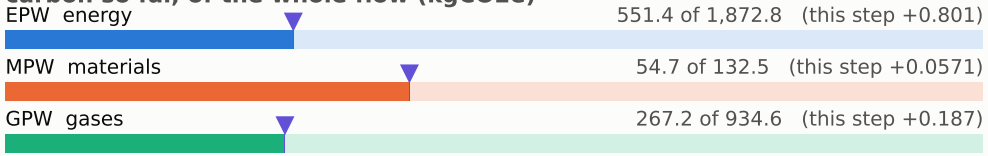

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

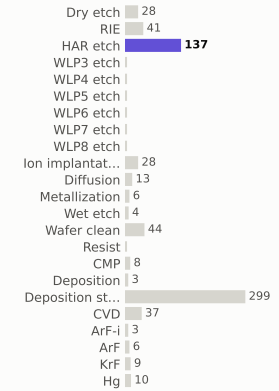

materials deposited (g)

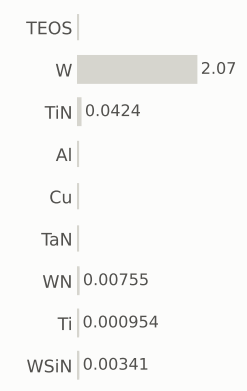

gases emitted (g)

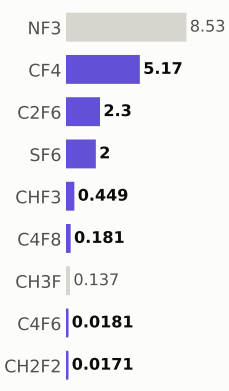

Step #8518.255: HAR_etch

etch_noop · HAR_etch

1.04	874.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

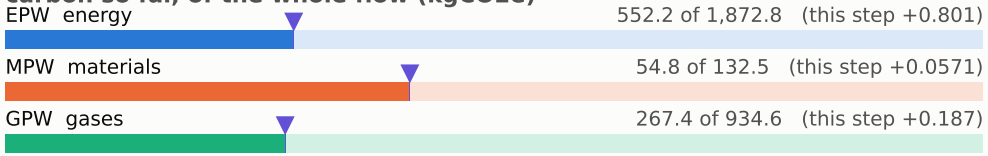

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

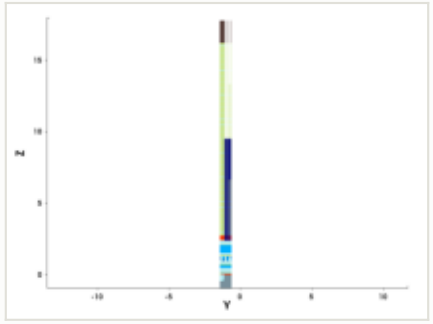

y cut at -1.035 µm

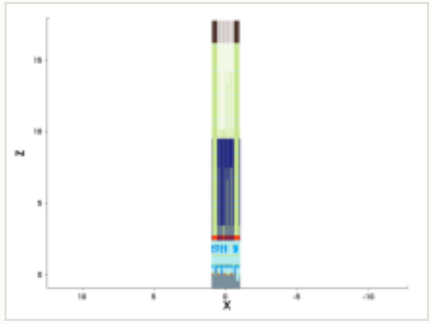

mask for this step

no mask for this step

steps by process area

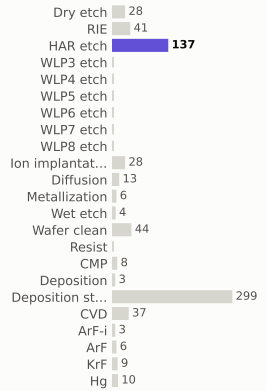

materials deposited (g)

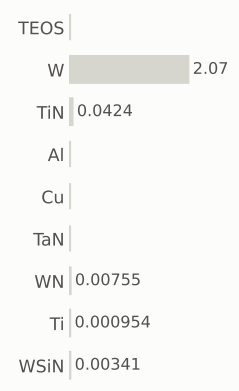

gases emitted (g)

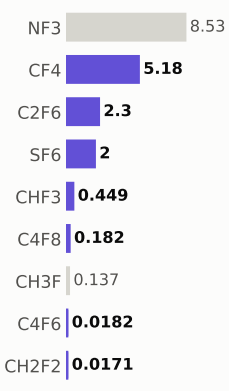

Step #8518.3221: HAR_etch

etch_noop · HAR_etch

1.04	875.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

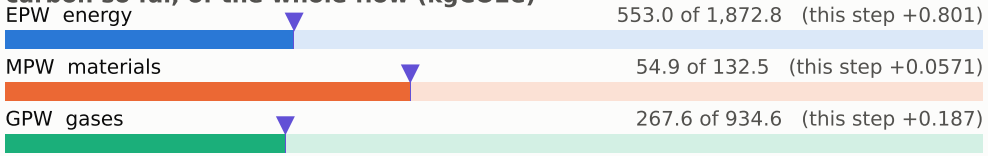

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

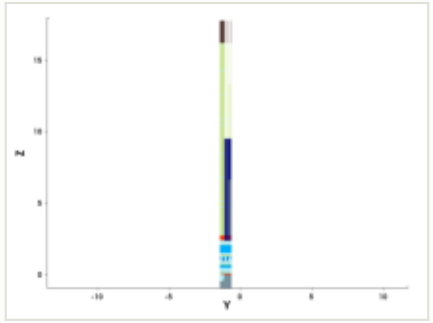

y cut at -1.035 µm

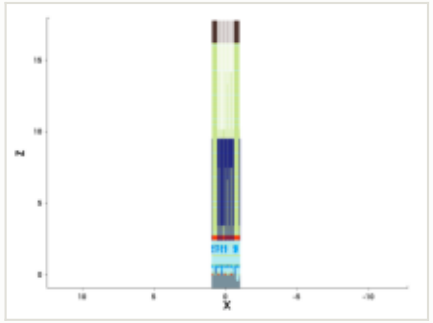

mask for this step

no mask for this step

steps by process area

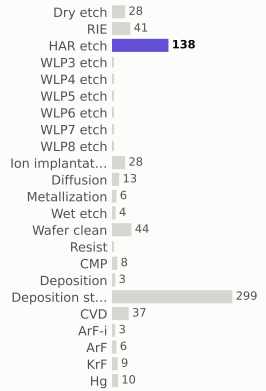

materials deposited (g)

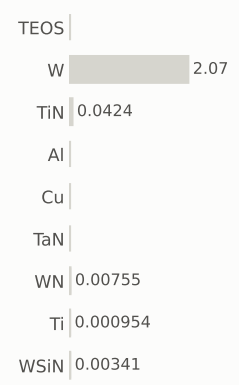

gases emitted (g)

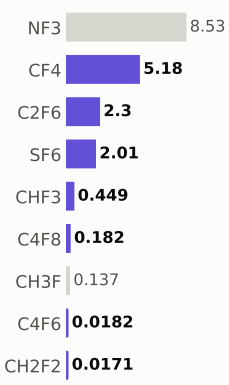

Step #8518.3893: HAR_etch

etch_noop · HAR_etch

1.04	876.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

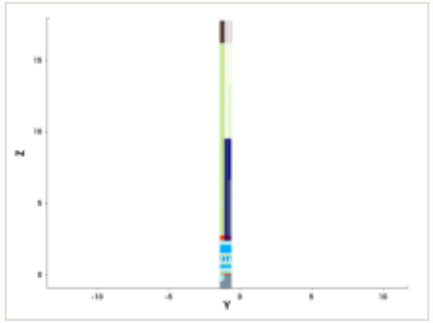

y cut at -1.035 µm

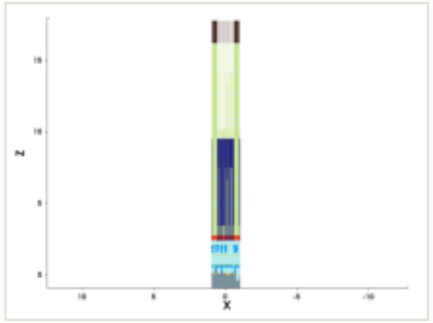

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

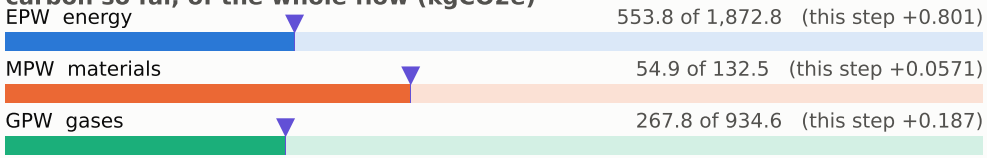

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

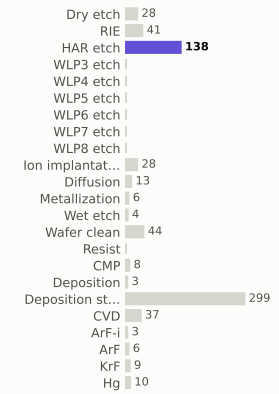

materials deposited (g)

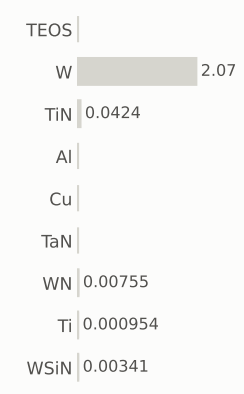

gases emitted (g)

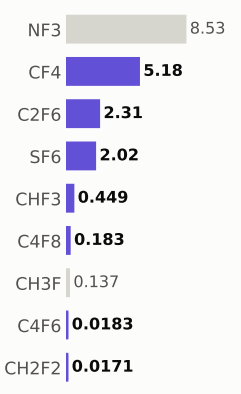

Step #8518.4564: HAR_etch

etch_noop · HAR_etch

1.04	877.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

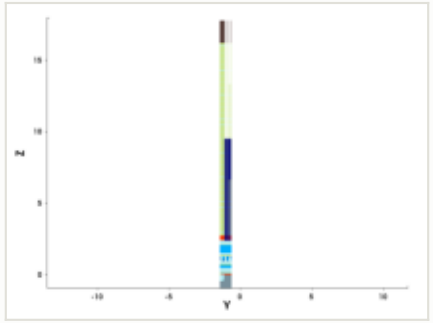

y cut at -1.035 µm

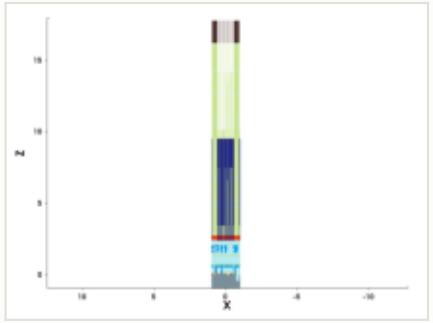

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

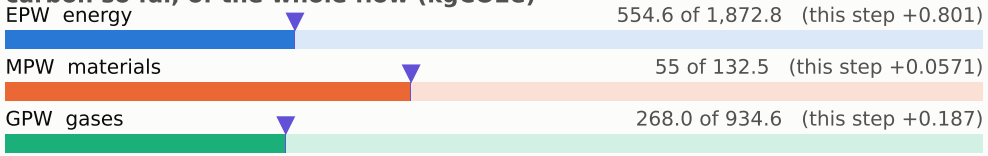

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

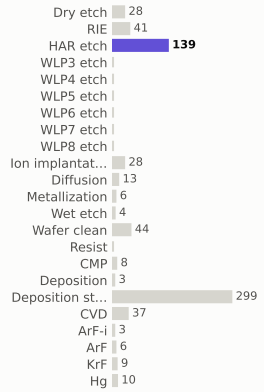

materials deposited (g)

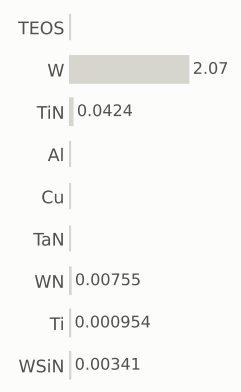

gases emitted (g)

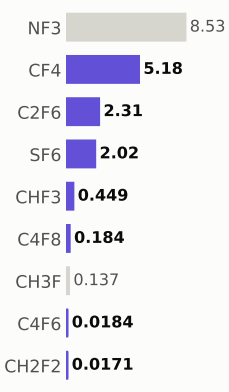

Step #8518.5235: HAR_etch

etch_noop · HAR_etch

1.04	878.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

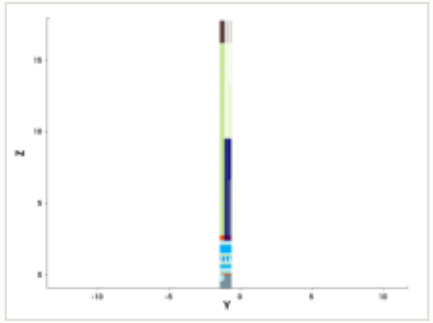

y cut at -1.035 µm

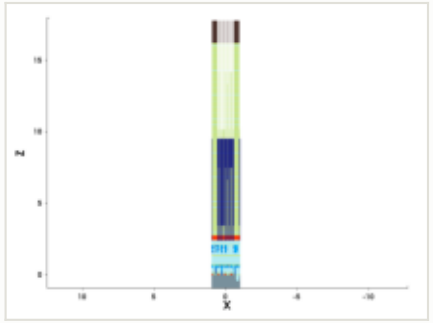

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

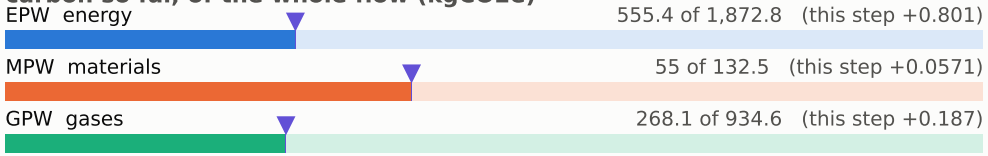

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

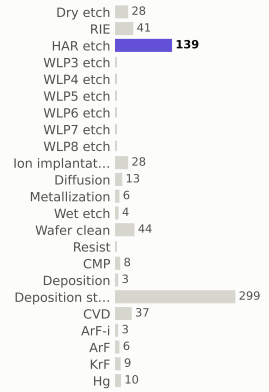

materials deposited (g)

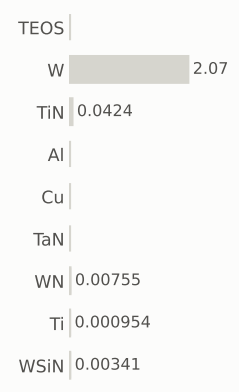

gases emitted (g)

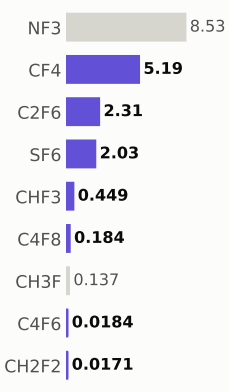

Step #8518.5906: HAR_etch

etch_noop · HAR_etch

1.04	879.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

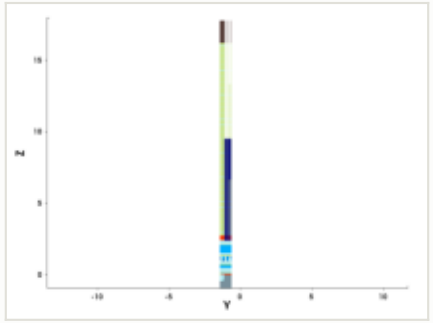

y cut at -1.035 µm

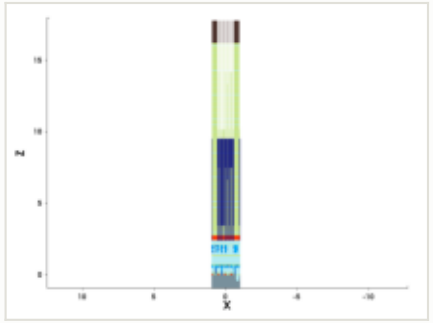

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

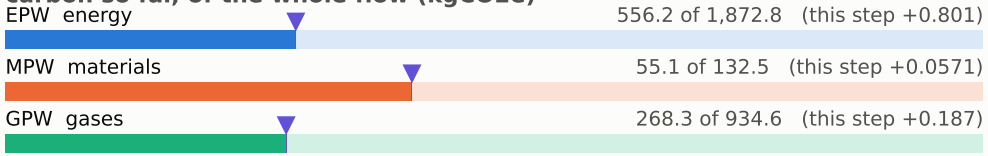

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

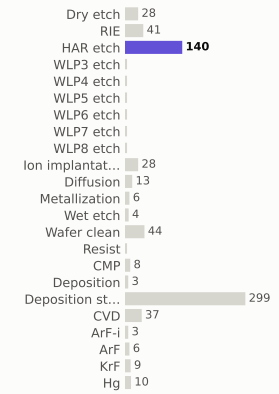

materials deposited (g)



gases emitted (g)

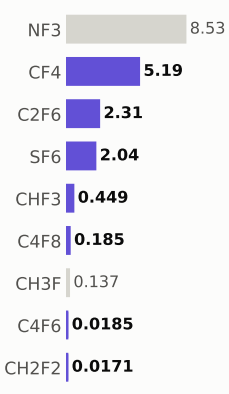

Step #8518.6577: HAR_etch

etch_noop · HAR_etch

1.04	880.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

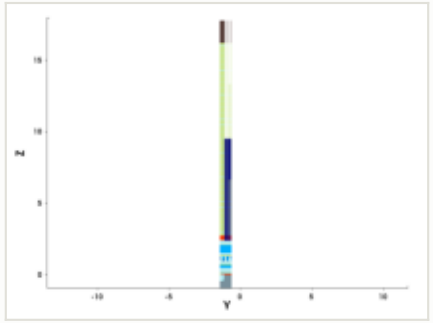

y cut at -1.035 µm

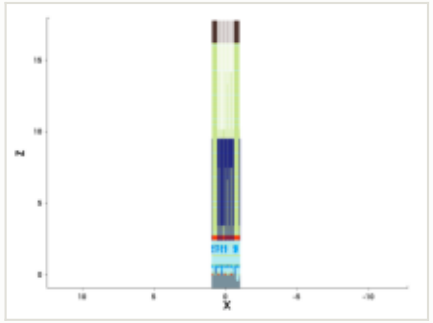

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

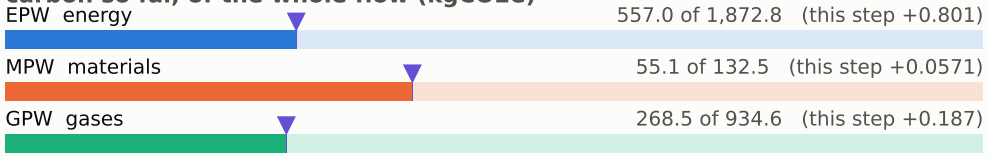

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

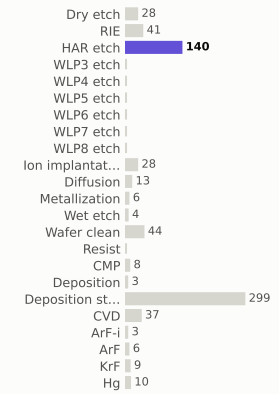

materials deposited (g)



gases emitted (g)



Step #8518.7248: HAR_etch

etch_noop · HAR_etch

1.04	881.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

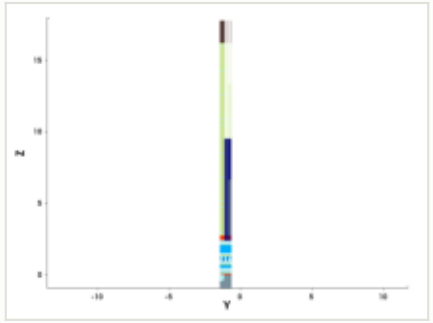

y cut at -1.035 µm

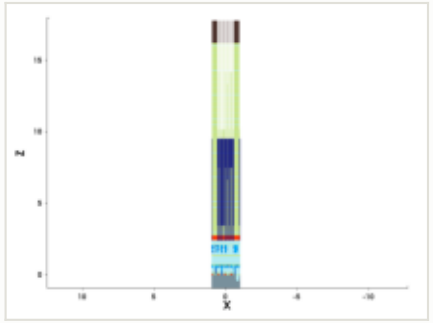

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

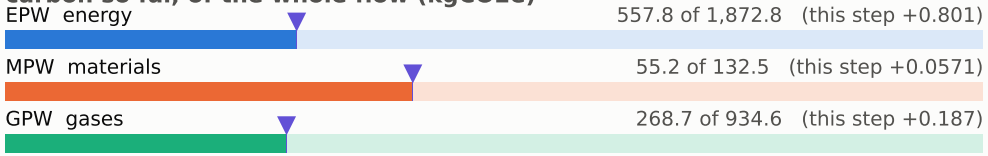

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

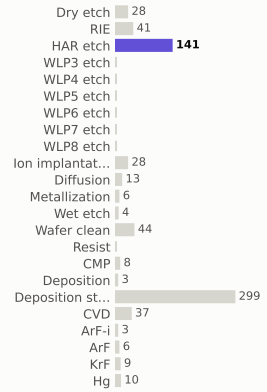

materials deposited (g)

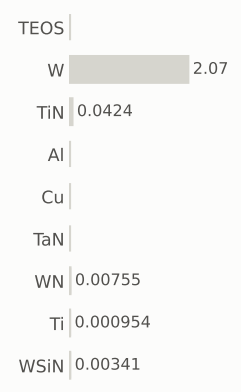

gases emitted (g)

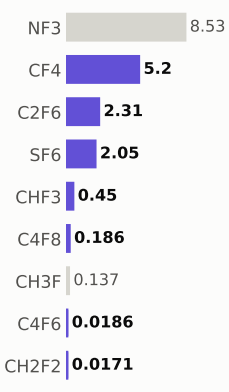

Step #8518.7919: HAR_etch

etch_noop · HAR_etch

1.04	882.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

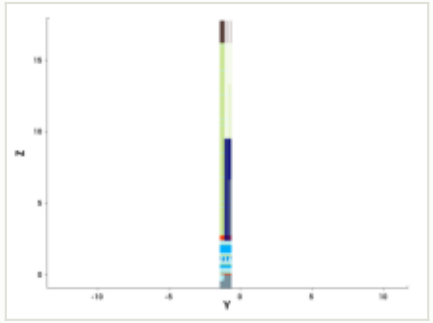

y cut at -1.035 µm

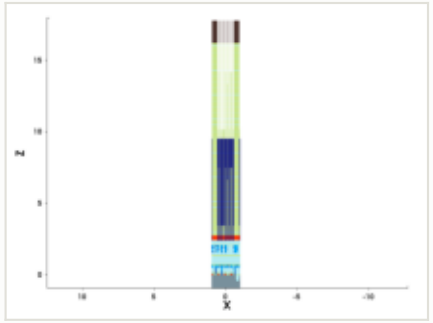

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

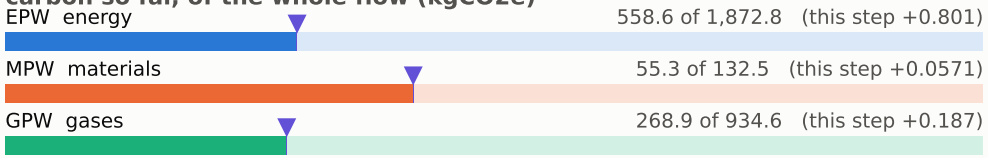

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

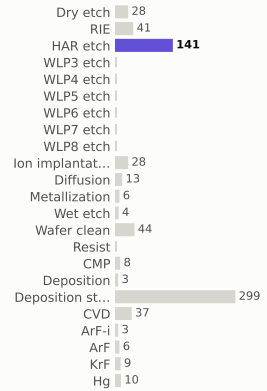

materials deposited (g)

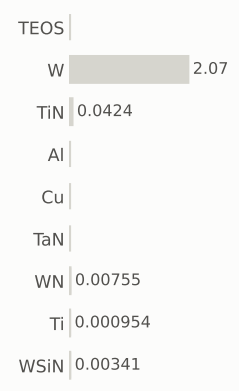

gases emitted (g)

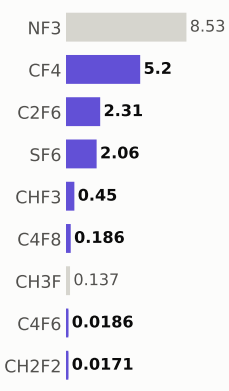

Step #8518.8591: HAR_etch

etch_noop · HAR_etch

1.04	883.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

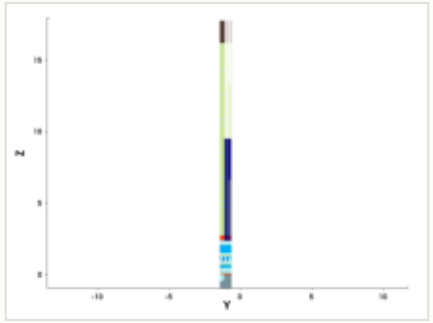

y cut at -1.035 µm

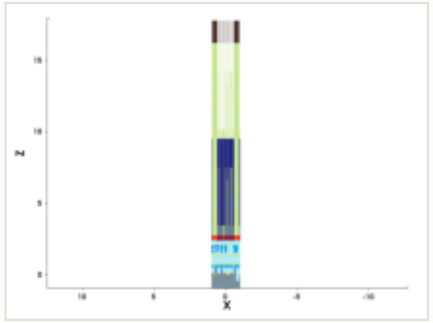

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

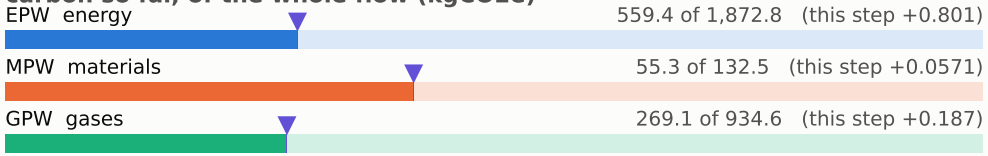

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

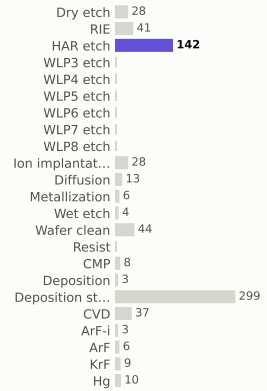

materials deposited (g)

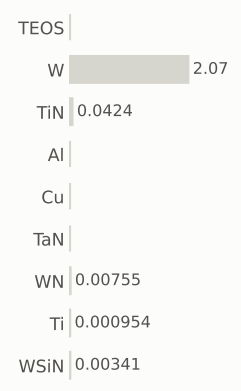

gases emitted (g)

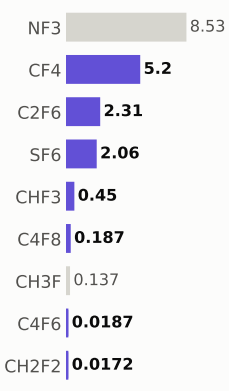

Step #8518.9262: HAR_etch

etch_noop · HAR_etch

1.04	884.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

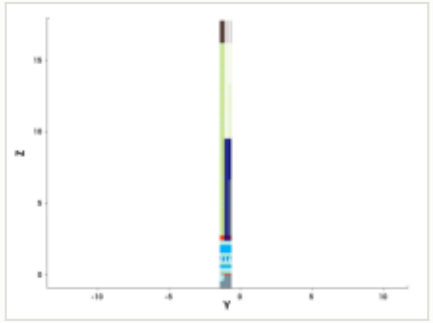

y cut at -1.035 µm

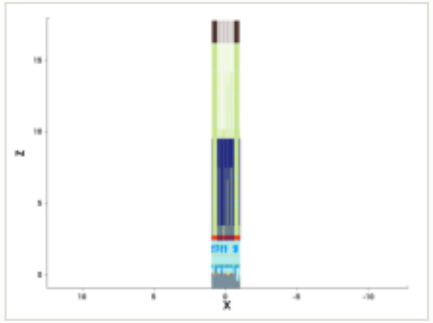

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

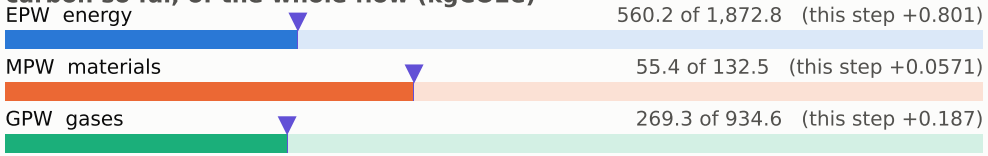

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

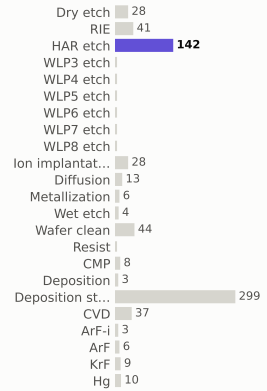

materials deposited (g)

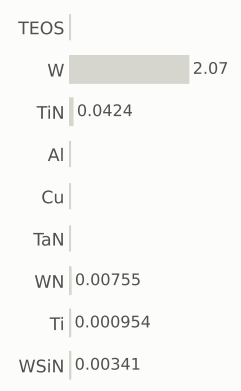

gases emitted (g)

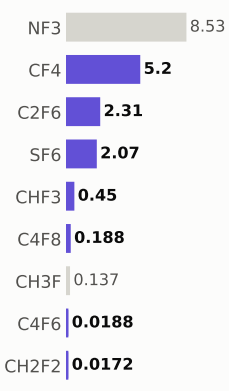

Step #8518.9933: HAR_etch

etch_noop · HAR_etch

1.04	885.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

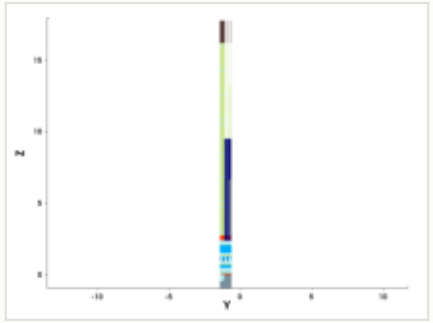

y cut at -1.035 µm

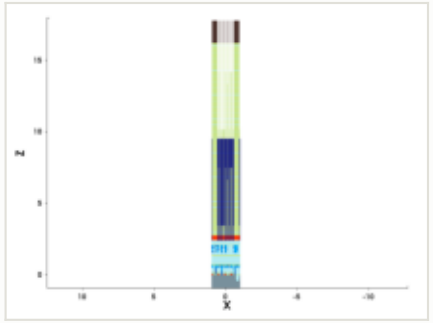

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

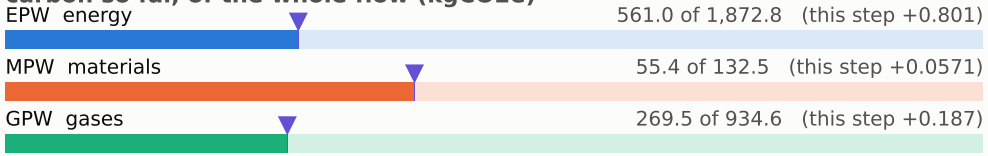

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

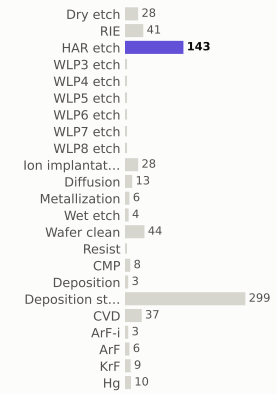

materials deposited (g)



gases emitted (g)

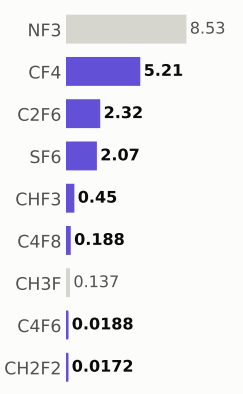

Step #8519.0604: HAR_etch

etch_noop · HAR_etch

1.04	886.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

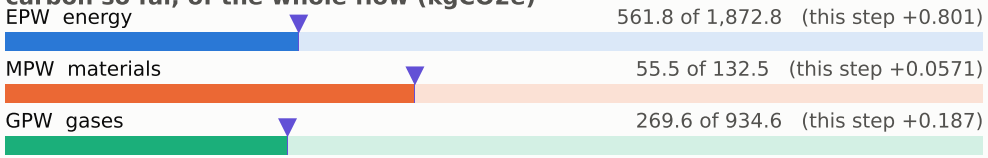

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

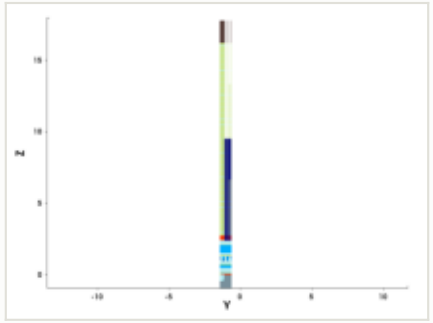

y cut at -1.035 µm

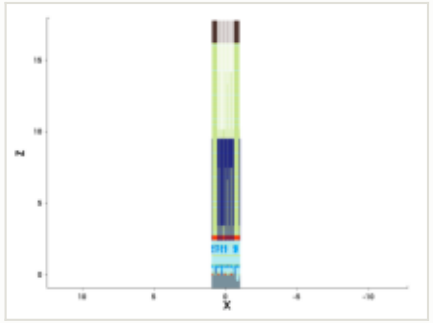

mask for this step

no mask for this step

steps by process area

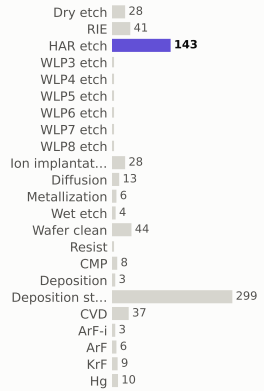

materials deposited (g)

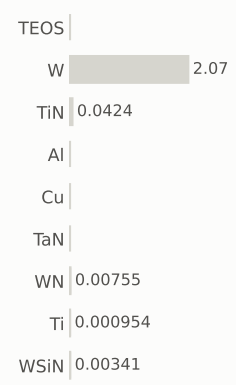

gases emitted (g)

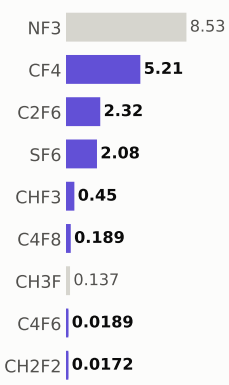

Step #8519.1275: HAR_etch

etch_noop · HAR_etch

1.04	888.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

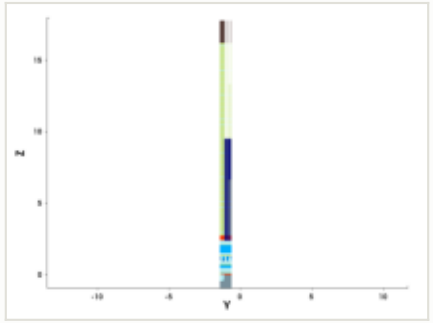

y cut at -1.035 µm

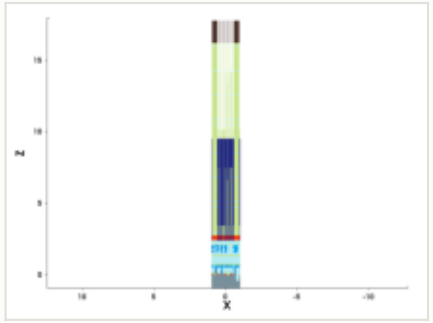

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

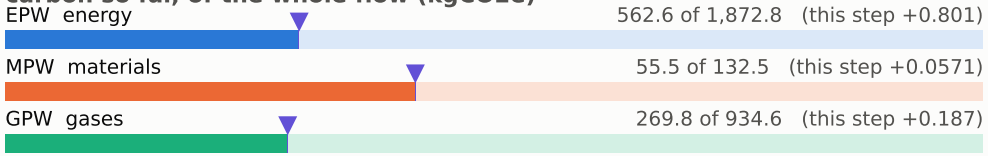

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

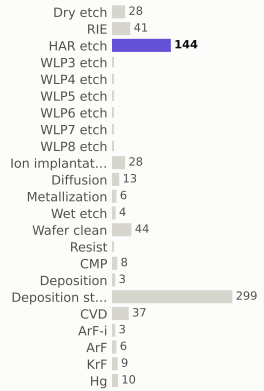

materials deposited (g)

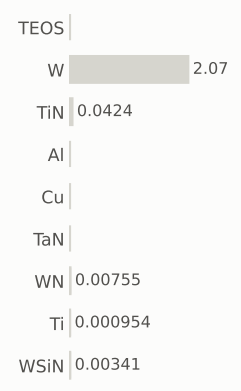

gases emitted (g)

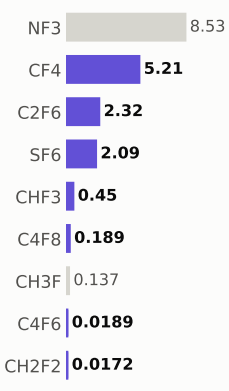

Step #8519.1946: HAR_etch

etch_noop · HAR_etch

1.04	889.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

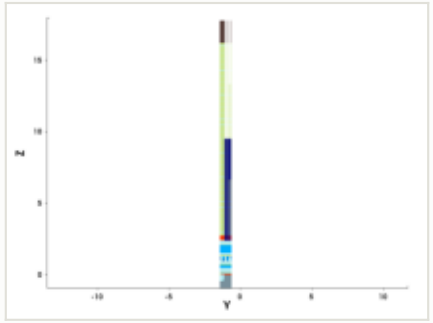

y cut at -1.035 µm

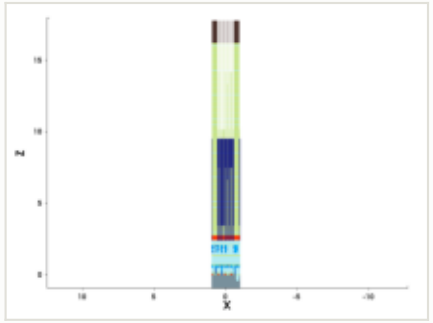

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

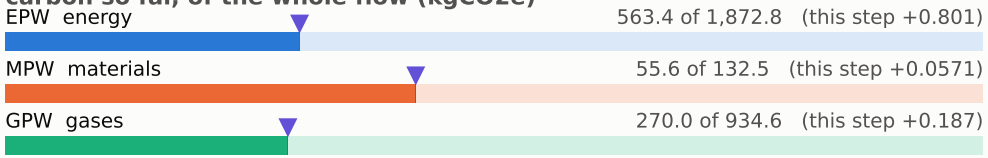

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

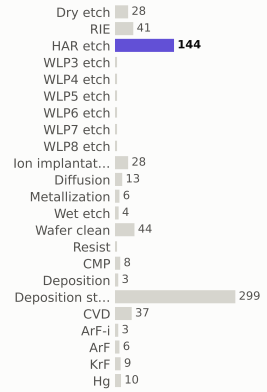

materials deposited (g)

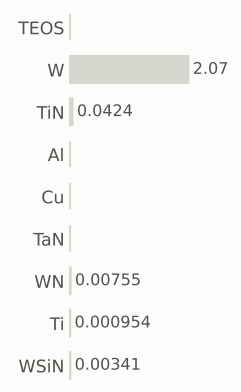

gases emitted (g)

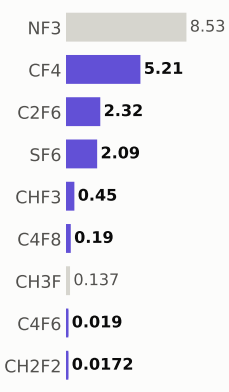

Step #8519.2617: HAR_etch

etch_noop · HAR_etch

1.04	890.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

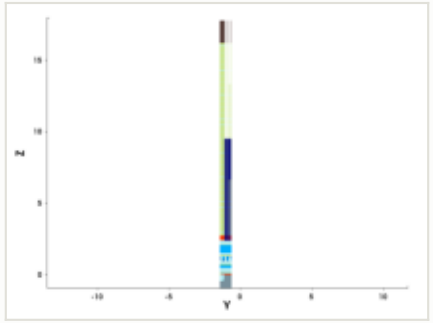

y cut at -1.035 µm

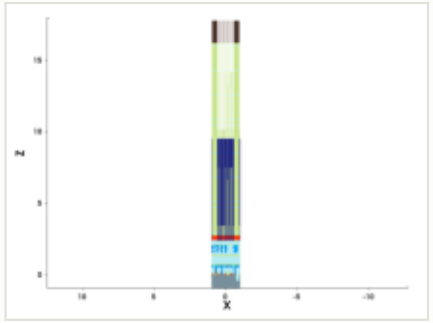

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

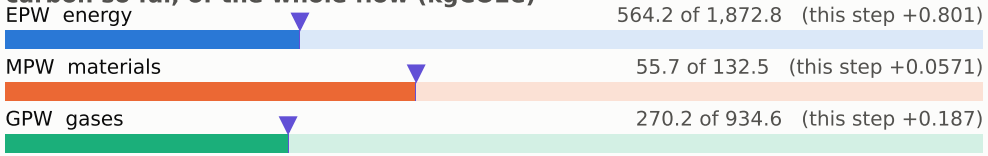

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

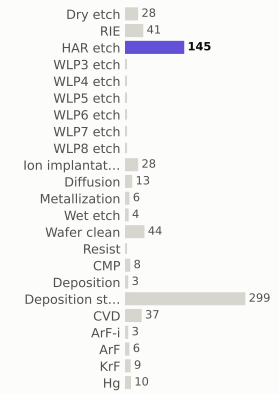

materials deposited (g)



gases emitted (g)



Step #8519.3289: HAR_etch

etch_noop · HAR_etch

1.04	891.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

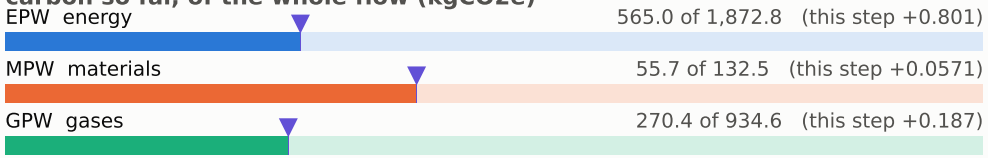

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

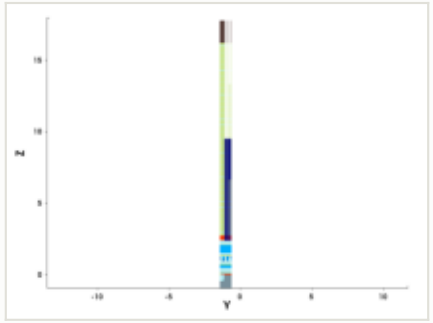

y cut at -1.035 µm

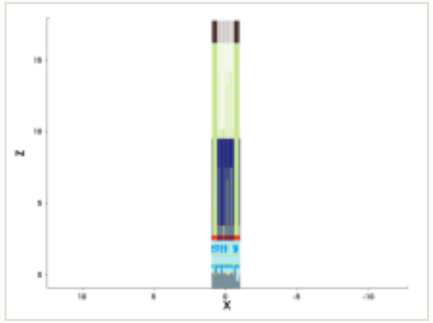

mask for this step

no mask for this step

steps by process area

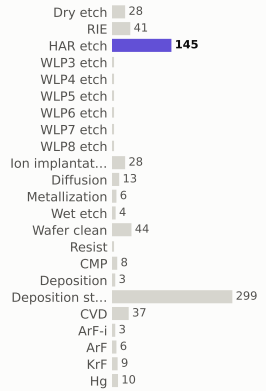

materials deposited (g)

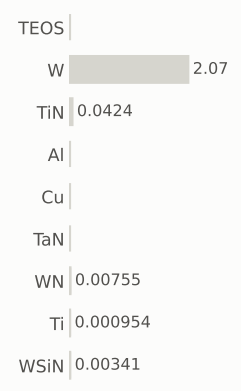

gases emitted (g)

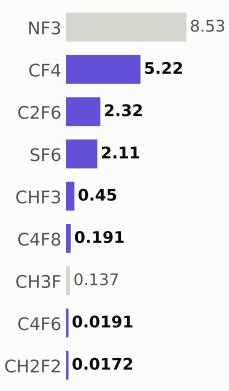

Step #8519.396: HAR_etch

etch_noop · HAR_etch

1.04	892.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

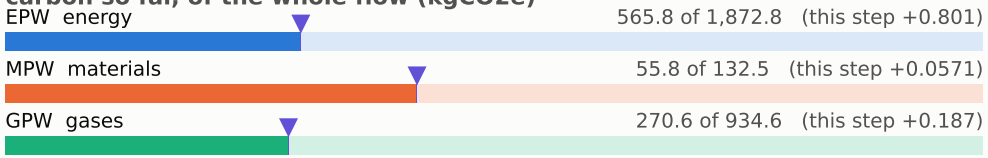

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

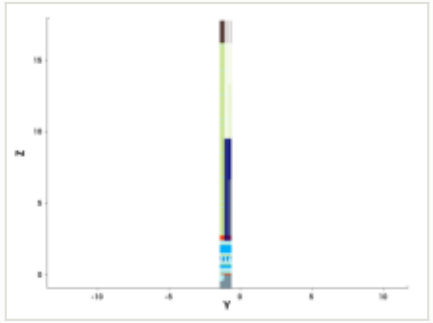

y cut at -1.035 µm

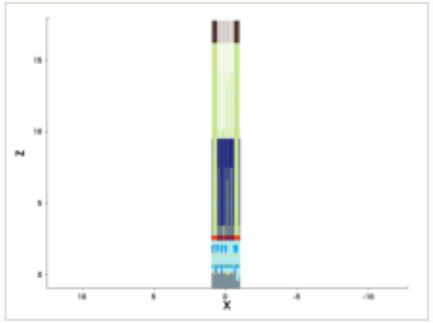

mask for this step

no mask for this step

steps by process area

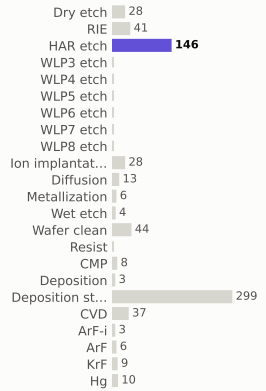

materials deposited (g)

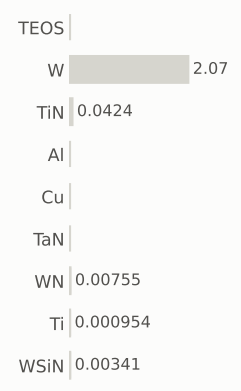

gases emitted (g)

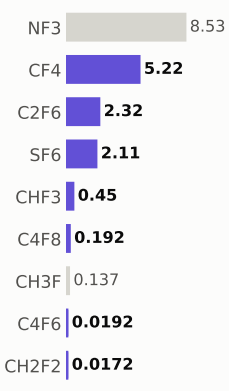

Step #8519.4631: HAR_etch

etch_noop · HAR_etch

1.04	893.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

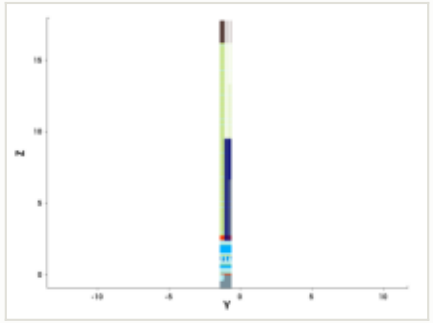

y cut at -1.035 µm

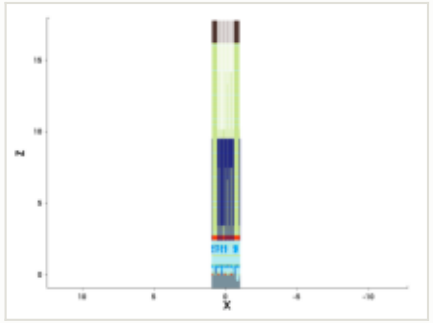

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

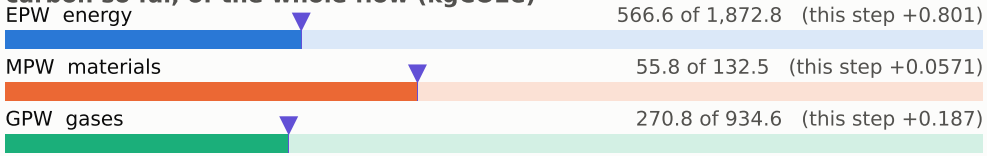

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

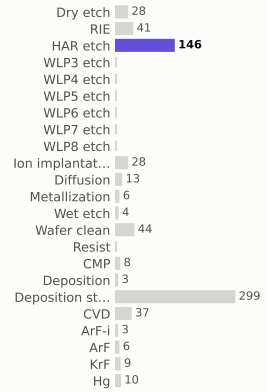

materials deposited (g)

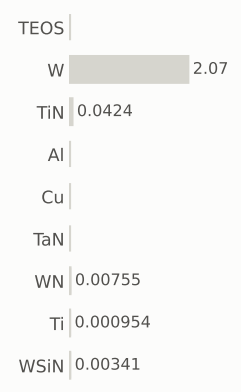

gases emitted (g)

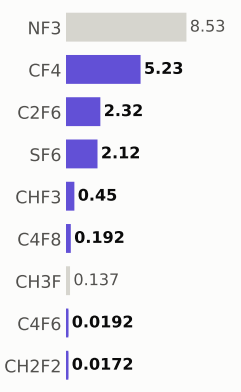

Step #8519.5302: HAR_etch

etch_noop · HAR_etch

1.04	894.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

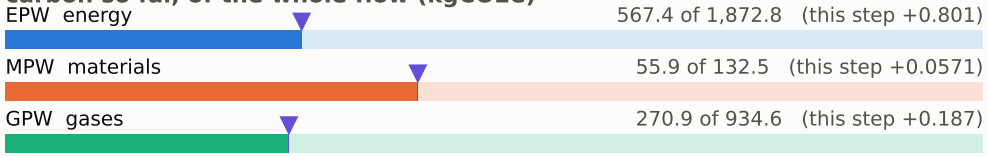

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

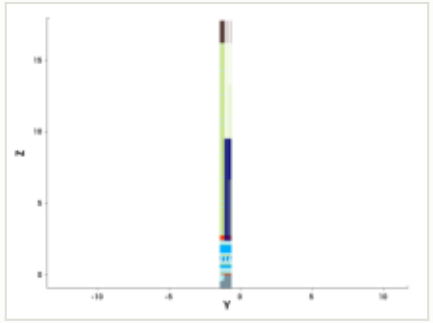

y cut at -1.035 µm

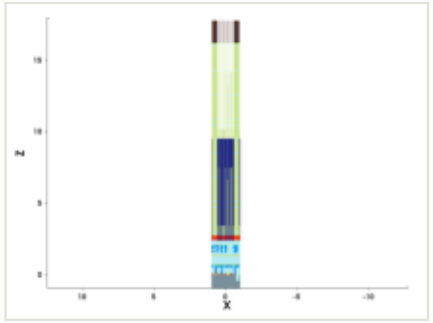

mask for this step

no mask for this step

steps by process area

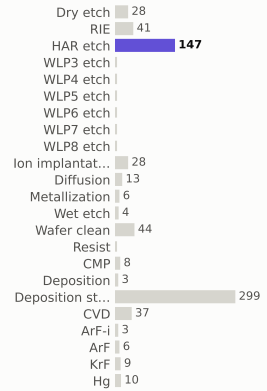

materials deposited (g)

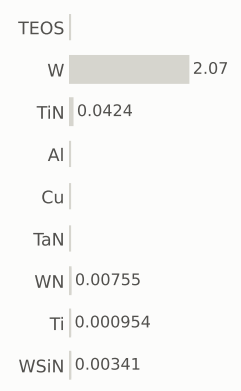

gases emitted (g)

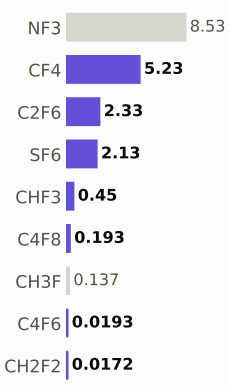

Step #8519.5973: HAR_etch

etch_noop · HAR_etch

1.04	895.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

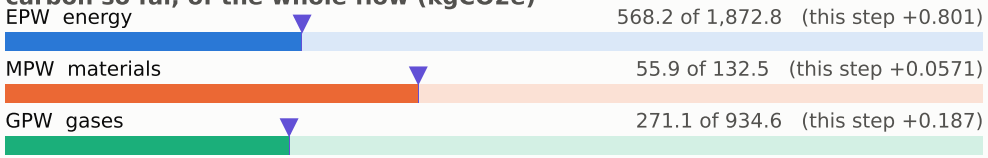

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

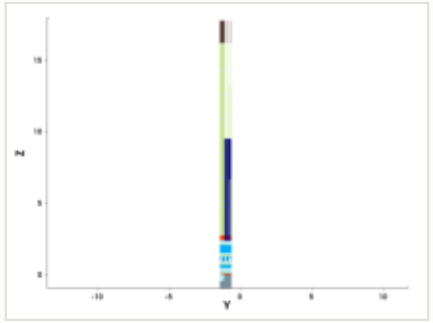

y cut at -1.035 µm

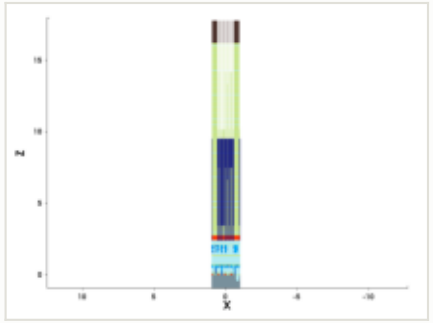

mask for this step

no mask for this step

steps by process area

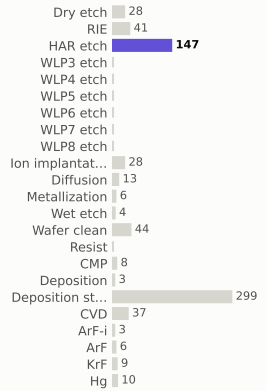

materials deposited (g)

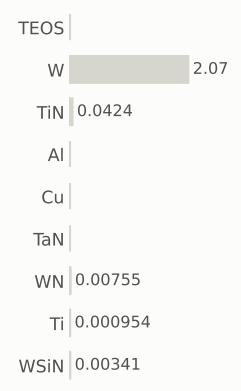

gases emitted (g)

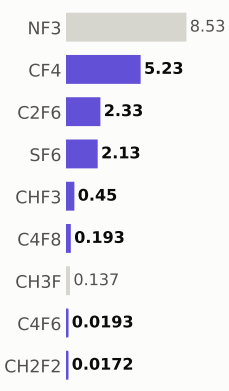

Step #8519.6644: HAR_etch

etch_noop · HAR_etch

1.04	896.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

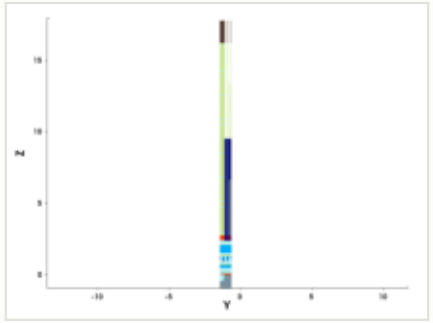

y cut at -1.035 µm

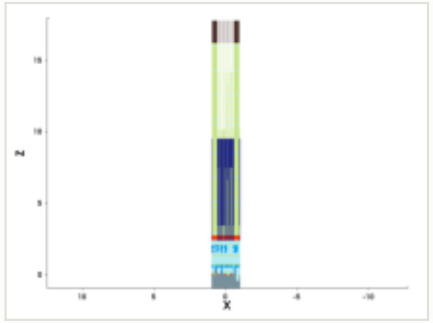

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

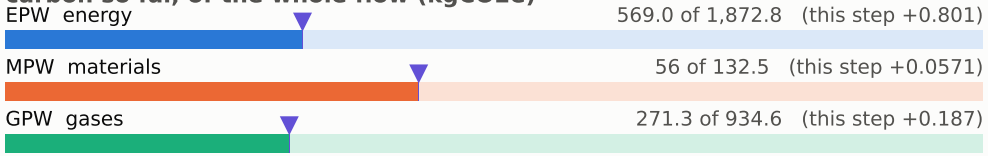

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

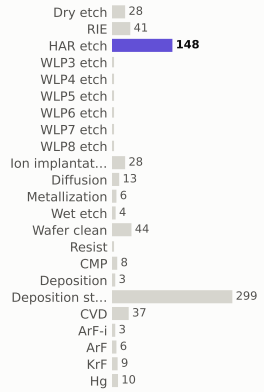

materials deposited (g)

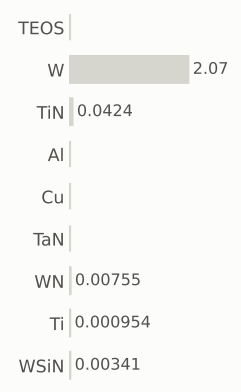

gases emitted (g)

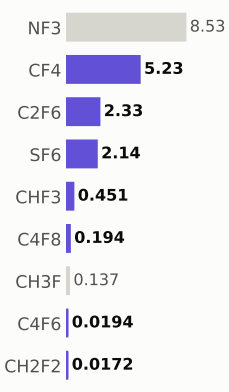

Step #8519.7315: HAR_etch

etch_noop · HAR_etch

1.04	897.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

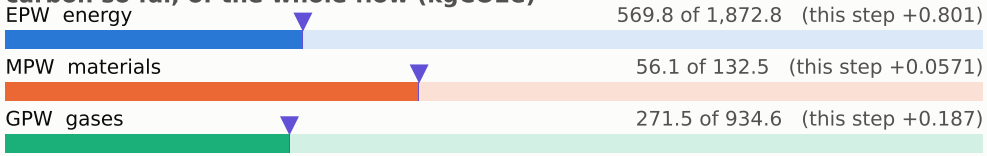

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

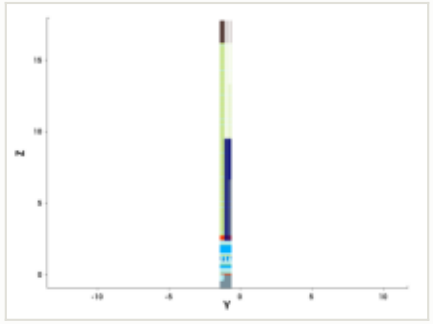

y cut at -1.035 µm

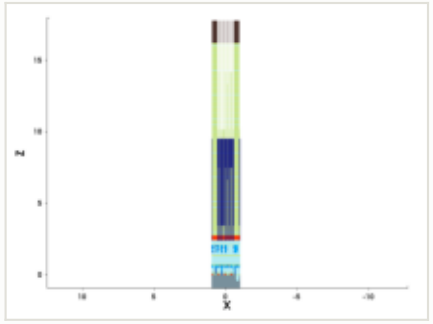

mask for this step

no mask for this step

steps by process area

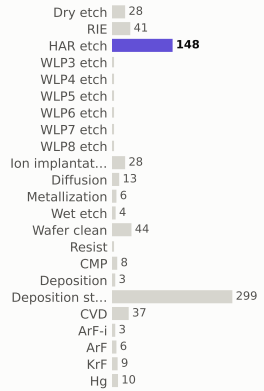

materials deposited (g)

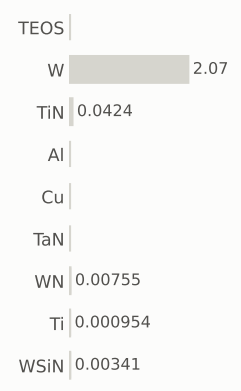

gases emitted (g)

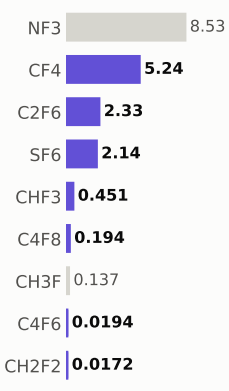

Step #8519.7987: HAR_etch

etch_noop · HAR_etch

1.04	898.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

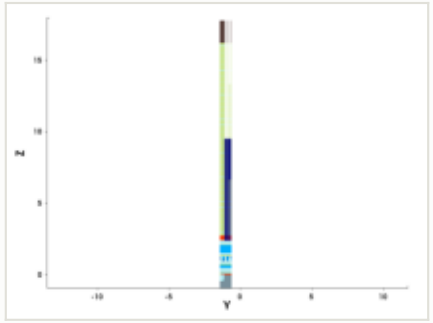

y cut at -1.035 µm

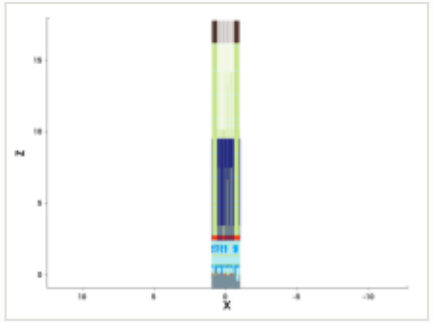

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

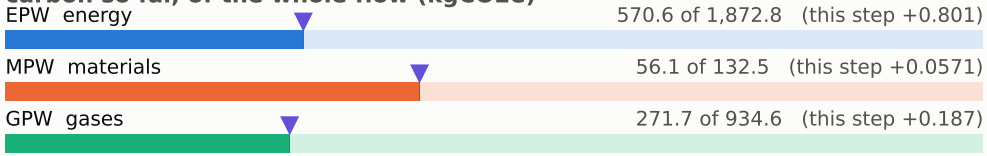

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

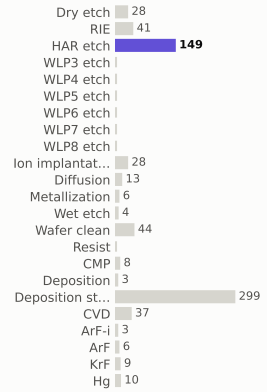

materials deposited (g)

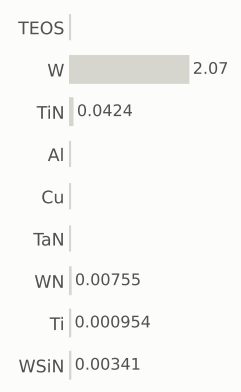

gases emitted (g)

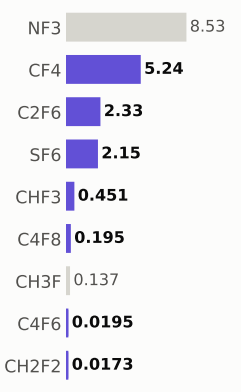

Step #8519.8658: HAR_etch

etch_noop · HAR_etch

1.04	899.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

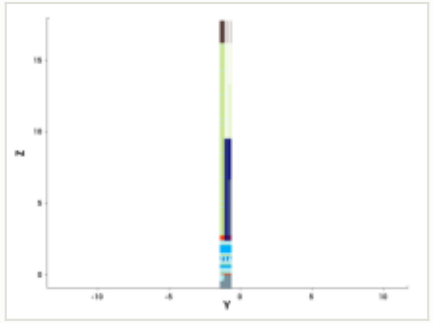

y cut at -1.035 µm

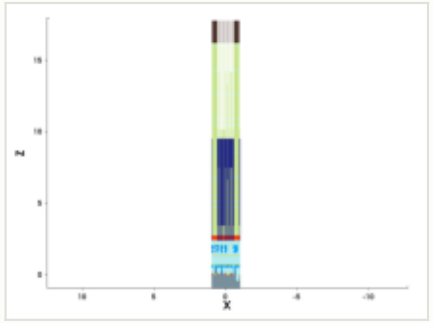

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

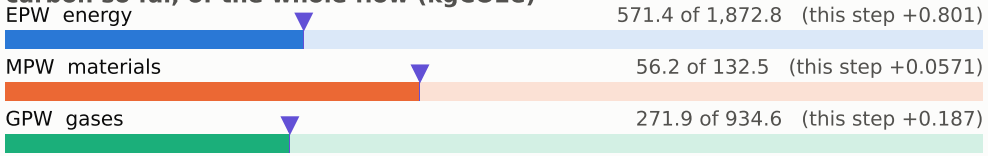

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

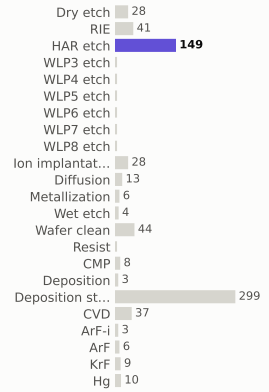

materials deposited (g)

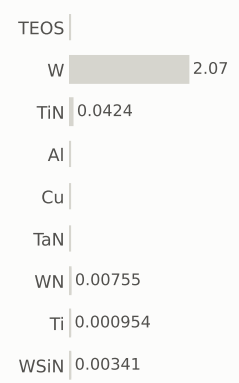

gases emitted (g)

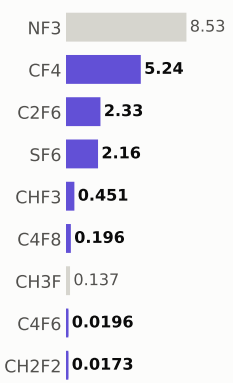

Step #8519.9329: HAR_etch

etch_noop · HAR_etch

1.04	900.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

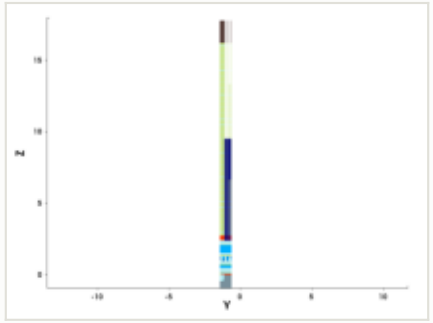

y cut at -1.035 µm

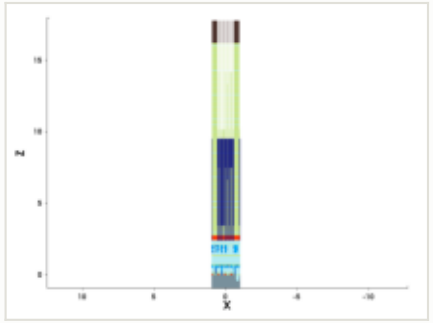

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

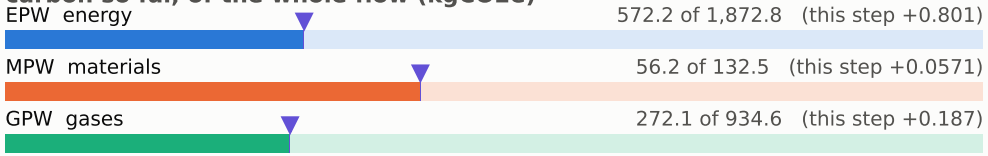

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

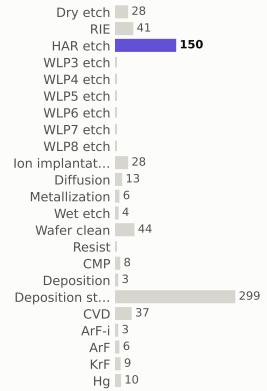

materials deposited (g)

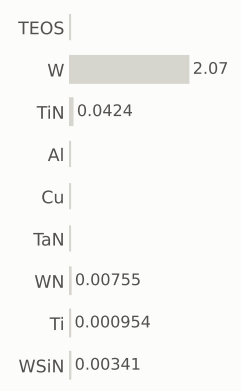

gases emitted (g)

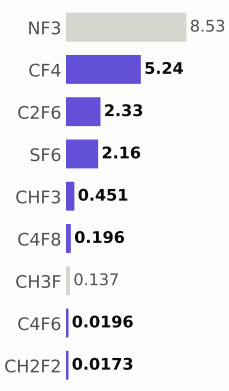

Step #8520: Dry_etch

etch_strip · Dry_etch

0.801	901.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

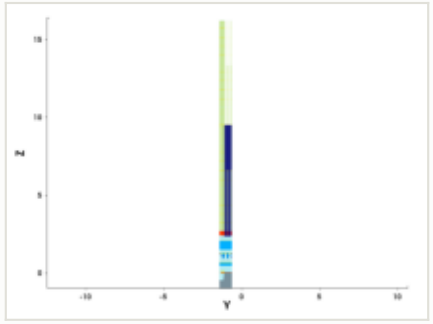

y cut at -1.035 µm

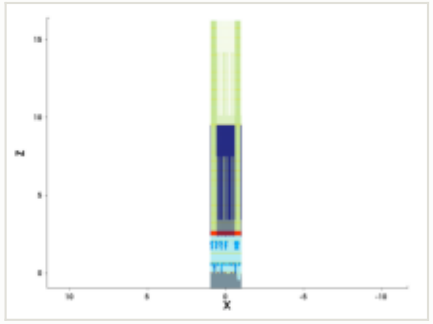

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

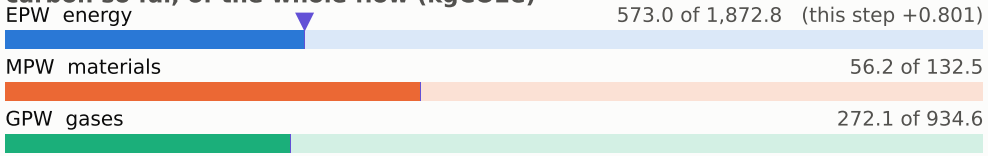

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

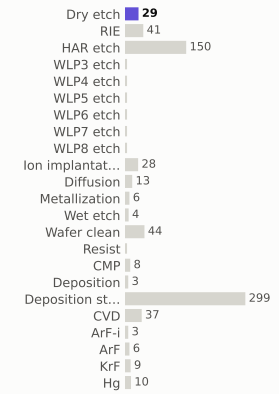

materials deposited (g)



gases emitted (g)

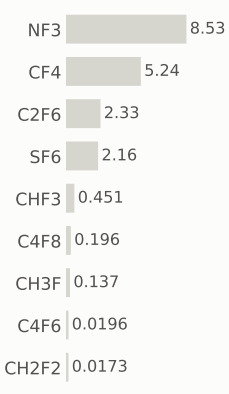

Step #8530: Wafer_clean

clean · Wafer_clean

0.169	901.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

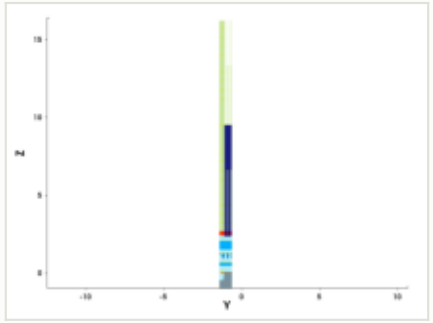

y cut at -1.035 µm

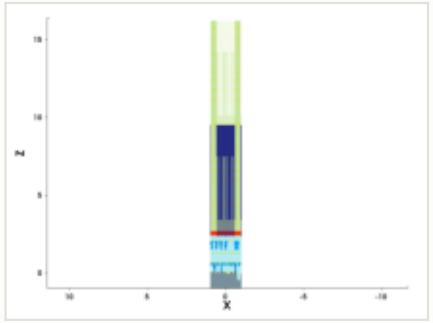

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

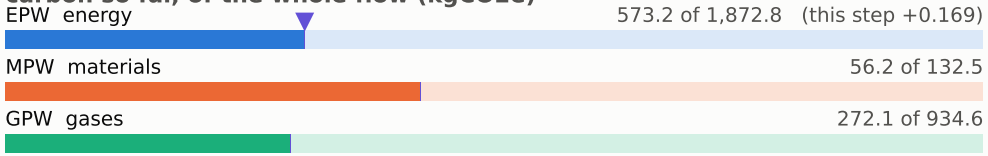

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

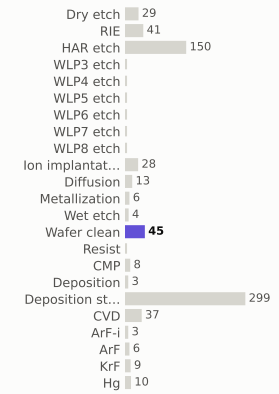

materials deposited (g)



gases emitted (g)

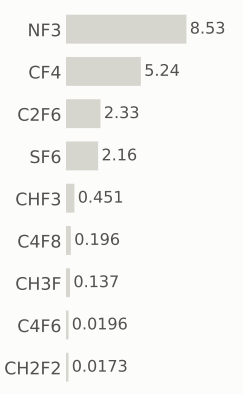

Step #8540: CVD

depo_isotropic · CVD

1.31	902.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	TiN
thickness	0.07 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0329 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

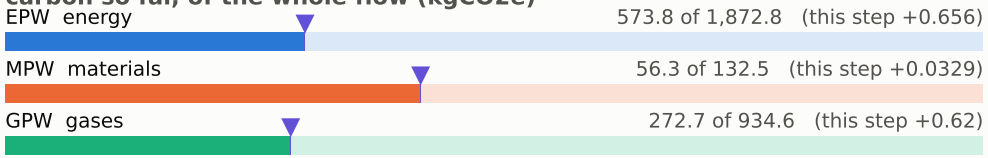

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

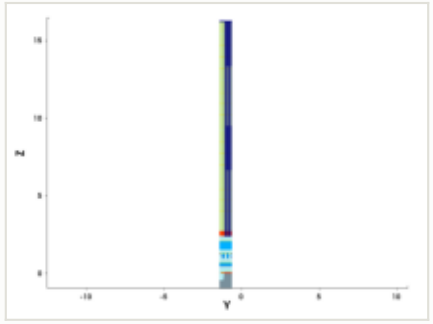

y cut at -1.035 µm

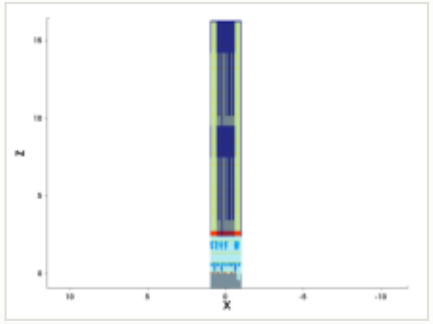

mask for this step

no mask for this step

steps by process area

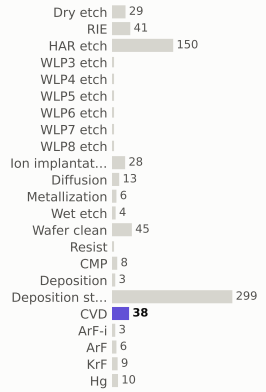

materials deposited (g)

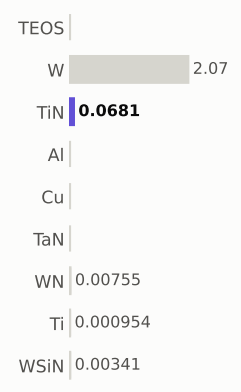

gases emitted (g)

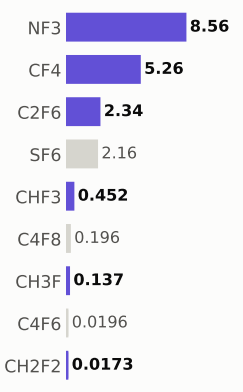

Step #8550: CMP

etch_cmp · CMP

0.169	902.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

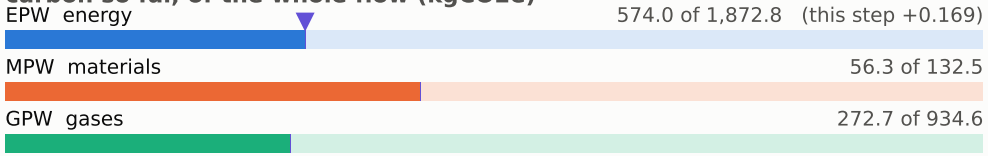

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

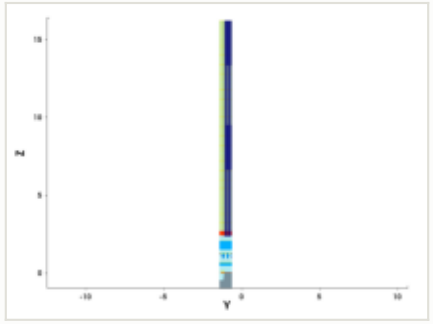

y cut at -1.035 µm

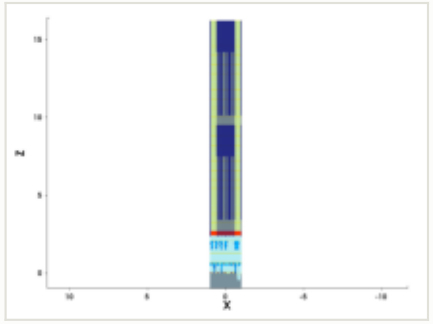

mask for this step

no mask for this step

steps by process area

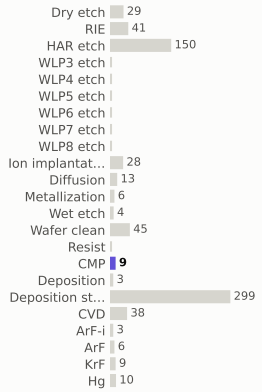

materials deposited (g)



gases emitted (g)



Step #8560: Wafer_clean

clean · Wafer_clean

0.169	903.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

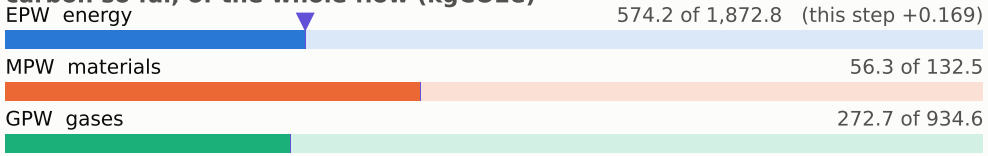

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

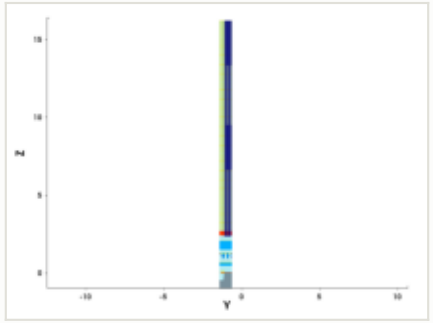

y cut at -1.035 µm

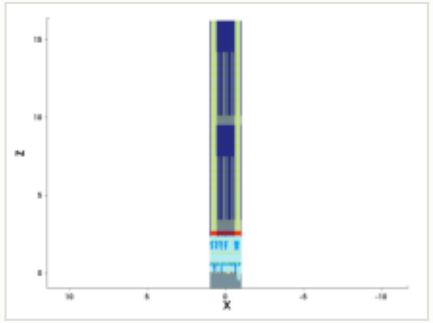

mask for this step

no mask for this step

steps by process area

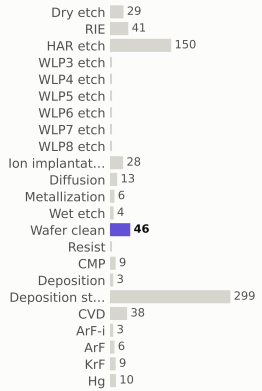

materials deposited (g)

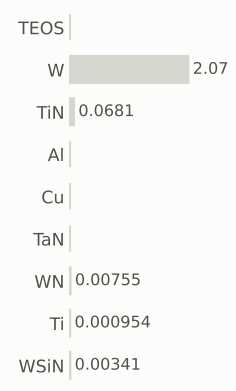

gases emitted (g)

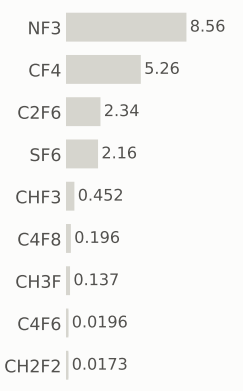

Step #8570: Wafer_clean

clean · Wafer_clean

0.169	903.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

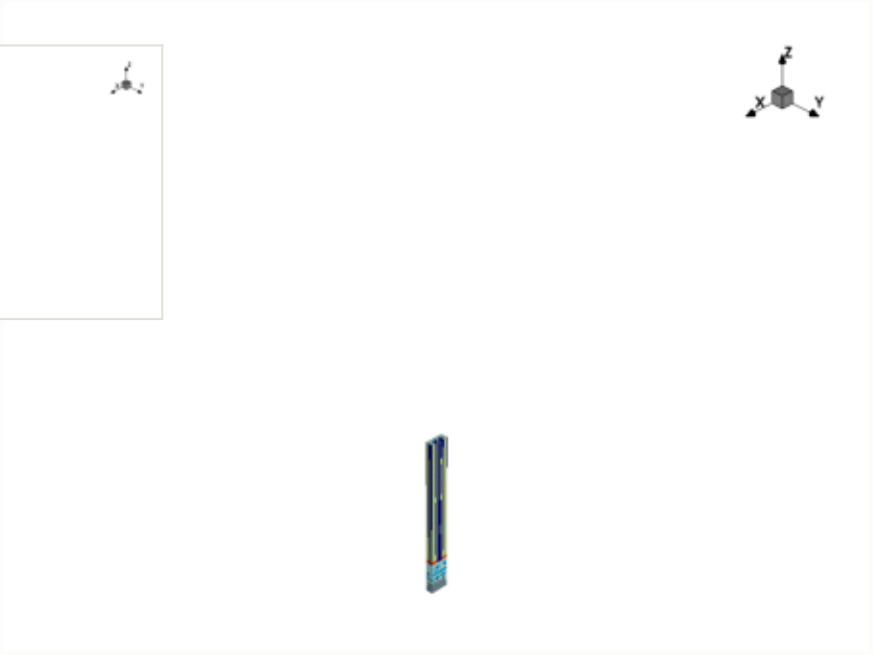

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

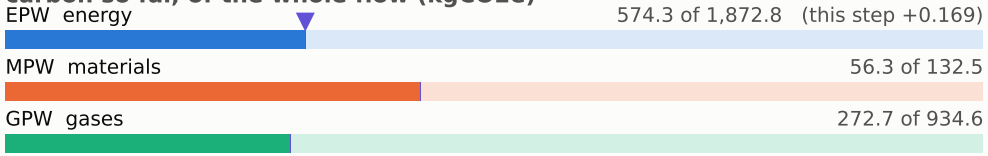

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

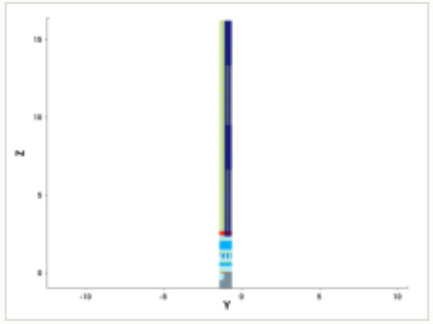

y cut at -1.035 µm

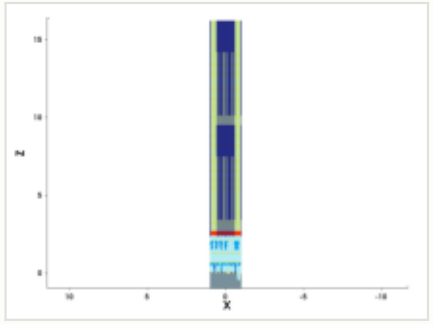

mask for this step

no mask for this step

steps by process area

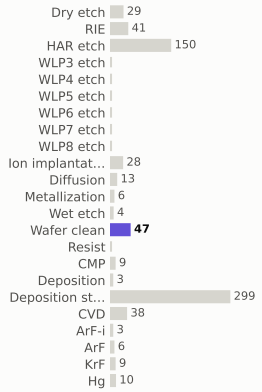

materials deposited (g)



gases emitted (g)



Step #8580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	903.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 574.7 of 1,872.8 (this step +0.328)

MPW materials — 56.3 of 132.5 (this step +0.0159)

GPW gases — 273.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

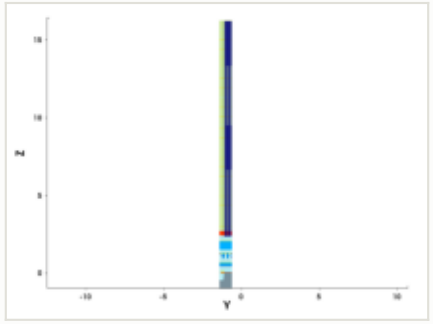

y cut at -1.035 µm

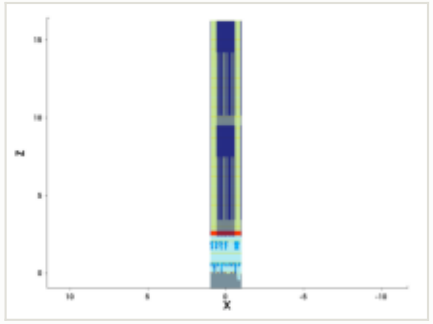

mask for this step

no mask for this step

steps by process area

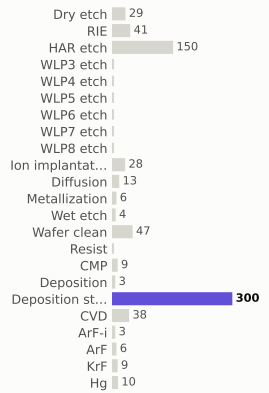

materials deposited (g)

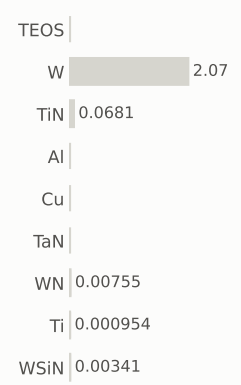

gases emitted (g)

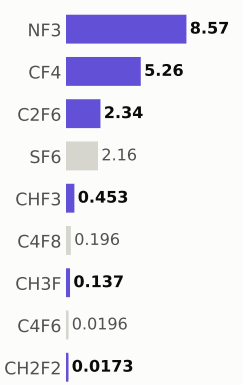

Step #8590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	904.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

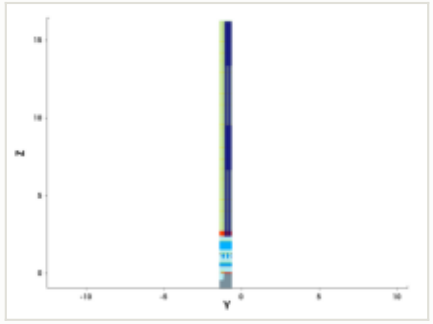

y cut at -1.035 µm

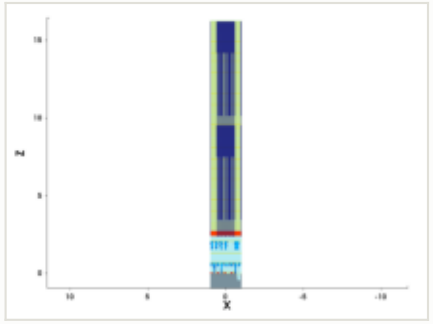

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 575.0 of 1,872.8 (this step +0.328)

MPW materials — 56.3 of 132.5 (this step +0.0159)

GPW gases — 273.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

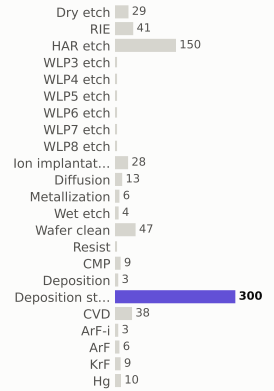

materials deposited (g)

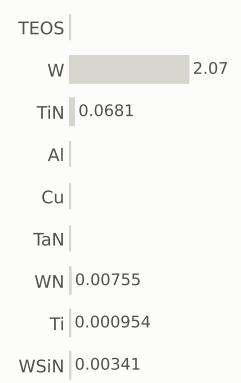

gases emitted (g)

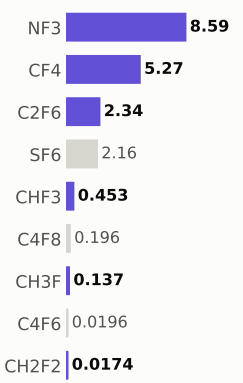

Step #8600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	905.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

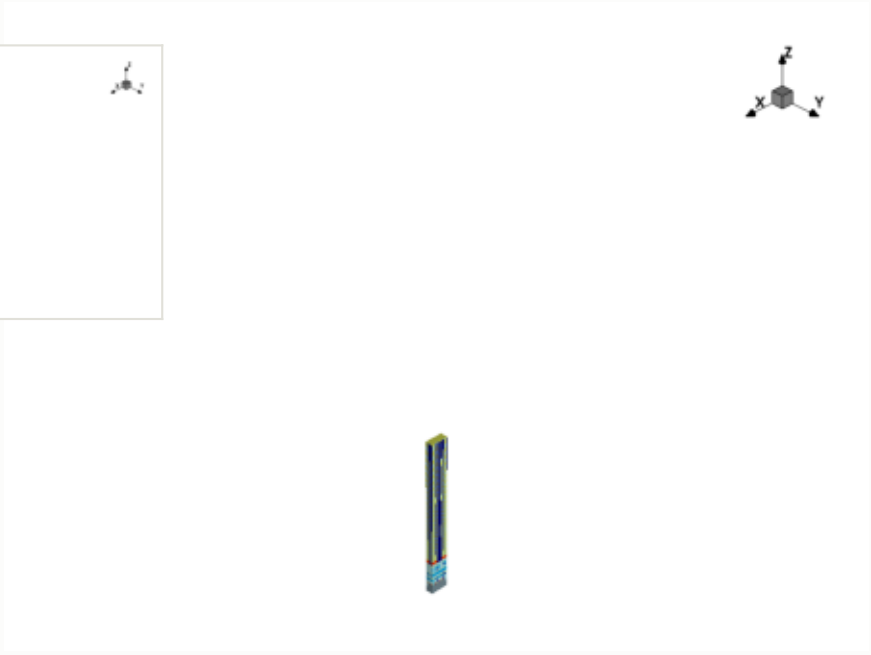

x cut at 0.000 µm

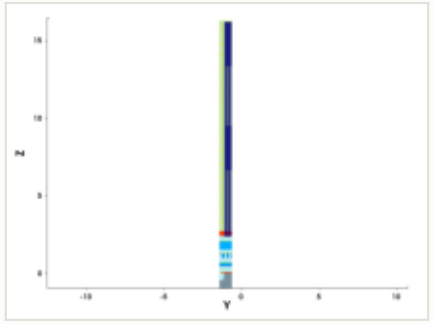

y cut at -1.035 µm

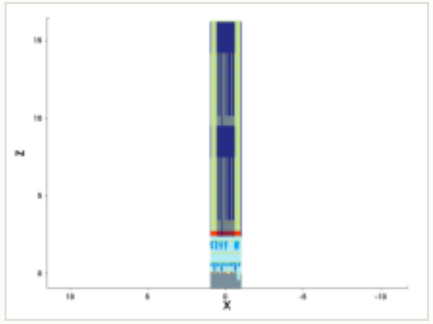

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 575.3 of 1,872.8 (this step +0.328)

MPW materials — 56.3 of 132.5 (this step +0.0159)

GPW gases — 273.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

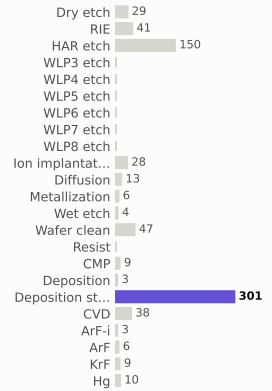

materials deposited (g)

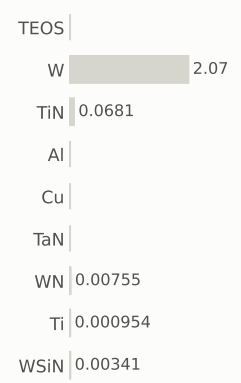

gases emitted (g)

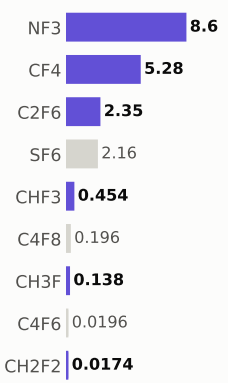

Step #8610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	905.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

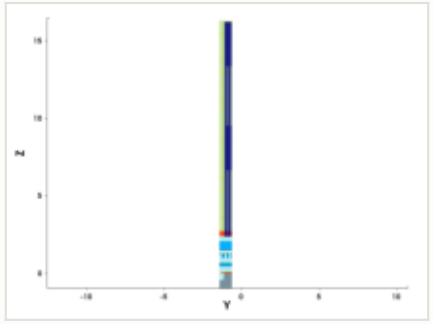

y cut at -1.035 µm

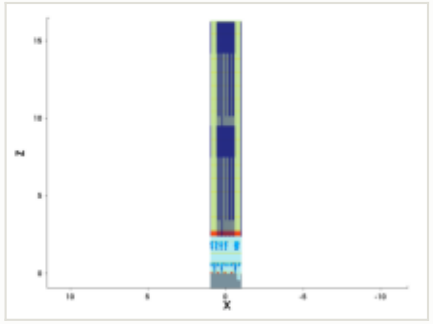

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 575.6 of 1,872.8 (this step +0.328)

MPW materials — 56.3 of 132.5 (this step +0.0159)

GPW gases — 273.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

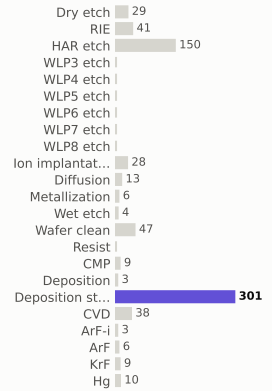

materials deposited (g)

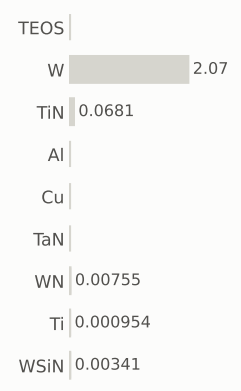

gases emitted (g)

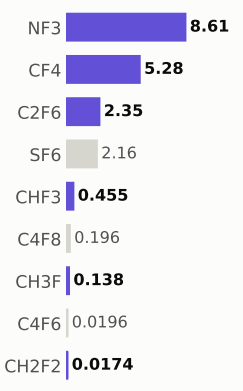

Step #8620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	906.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 576.0 of 1,872.8 (this step +0.328)

MPW materials — 56.3 of 132.5 (this step +0.0159)

GPW gases — 274.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

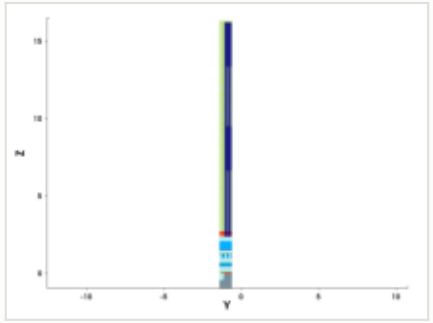

y cut at -1.035 µm

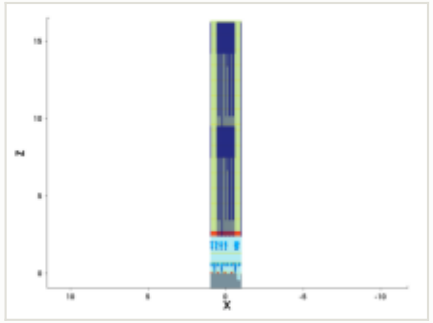

mask for this step

no mask for this step

steps by process area

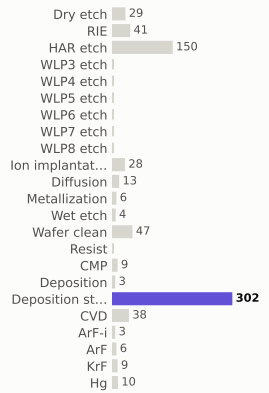

materials deposited (g)

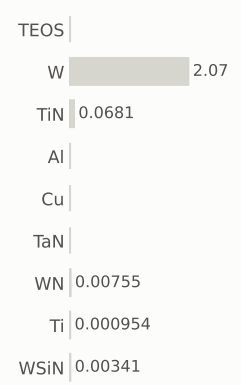

gases emitted (g)

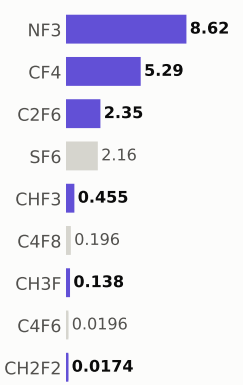

Step #8630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	907.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

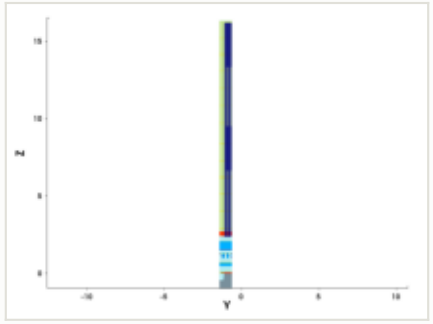

y cut at -1.035 µm

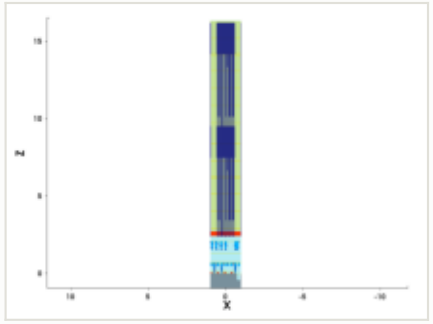

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 576.3 of 1,872.8 (this step +0.328)

MPW materials — 56.4 of 132.5 (this step +0.0159)

GPW gases — 274.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

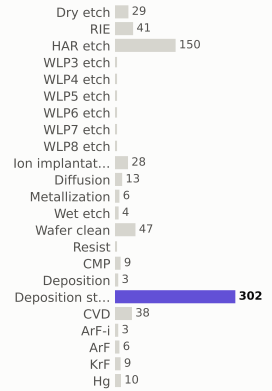

materials deposited (g)

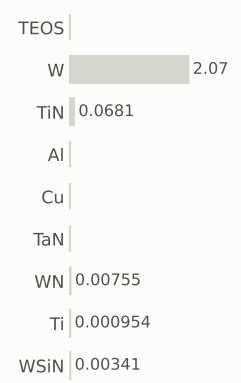

gases emitted (g)

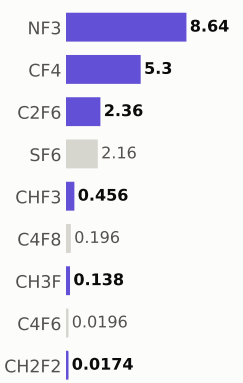

Step #8640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	907.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 576.6 of 1,872.8 (this step +0.328)

MPW materials — 56.4 of 132.5 (this step +0.0159)

GPW gases — 274.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

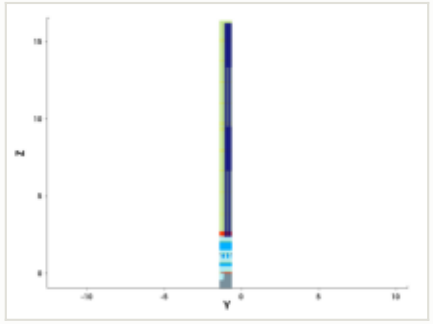

y cut at -1.035 µm

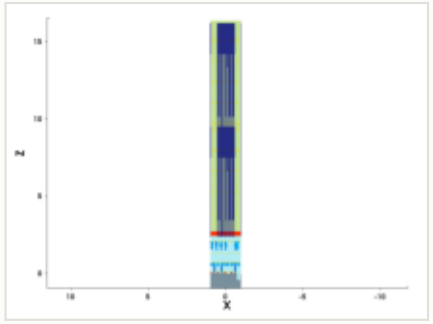

mask for this step

no mask for this step

steps by process area

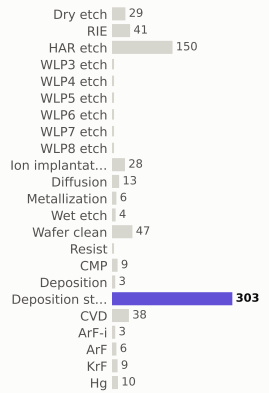

materials deposited (g)

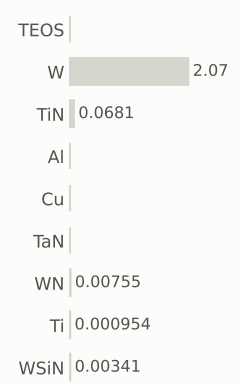

gases emitted (g)

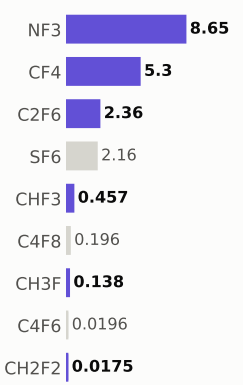

Step #8650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	908.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 577.0 of 1,872.8 (this step +0.328)

MPW materials — 56.4 of 132.5 (this step +0.0159)

GPW gases — 275.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

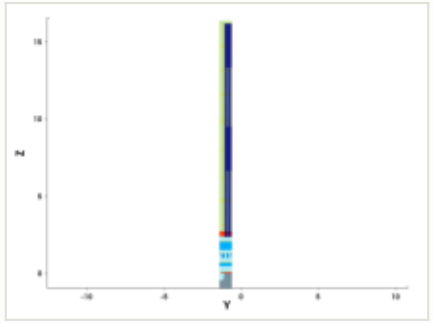

y cut at -1.035 µm

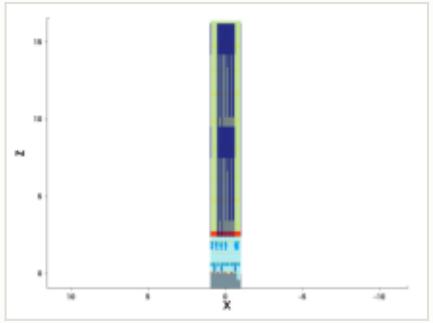

mask for this step

no mask for this step

steps by process area

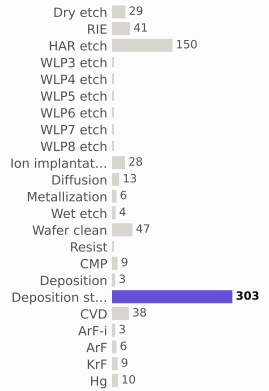

materials deposited (g)

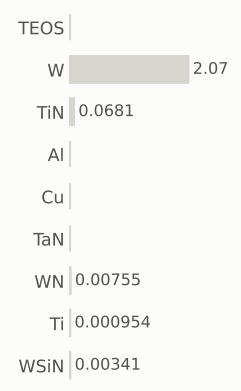

gases emitted (g)

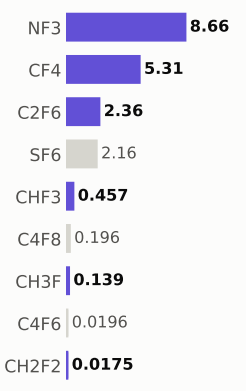

Step #8660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	909.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 577.3 of 1,872.8 (this step +0.328)

MPW materials — 56.4 of 132.5 (this step +0.0159)

GPW gases — 275.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

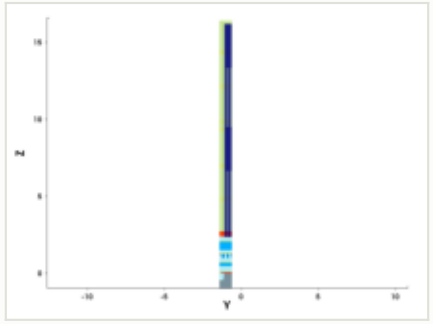

y cut at -1.035 µm

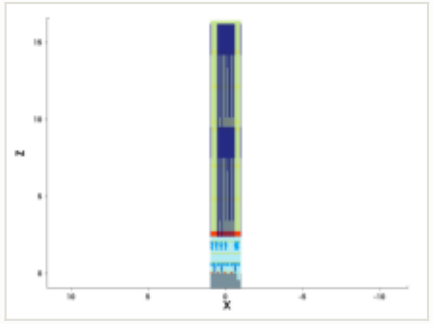

mask for this step

no mask for this step

steps by process area

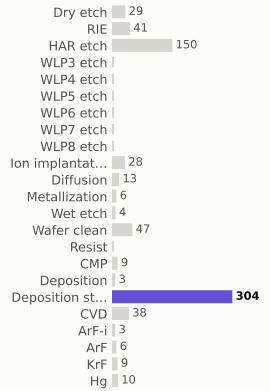

materials deposited (g)

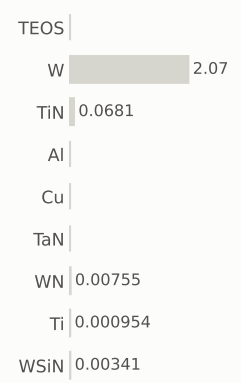

gases emitted (g)

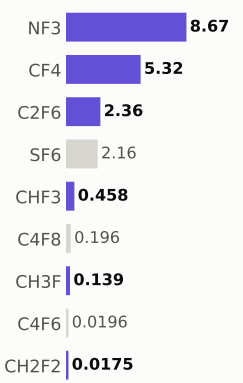

Step #8670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	909.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 577.6 of 1,872.8 (this step +0.328)

MPW materials — 56.4 of 132.5 (this step +0.0159)

GPW gases — 275.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

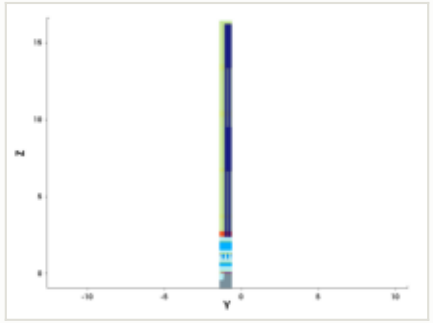

y cut at -1.035 µm

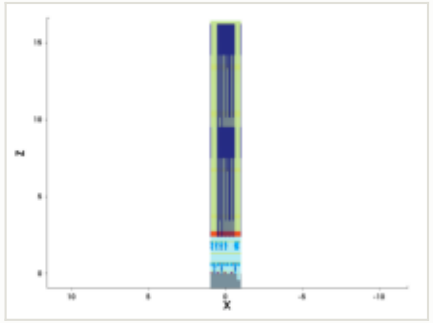

mask for this step

no mask for this step

steps by process area

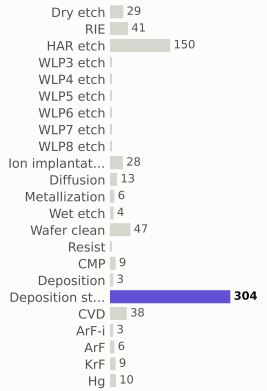

materials deposited (g)

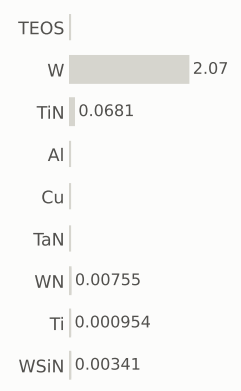

gases emitted (g)

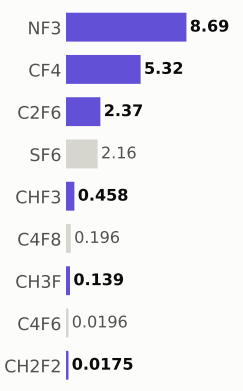

Step #8680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	910.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

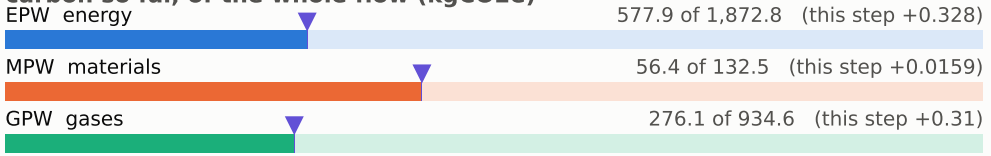

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

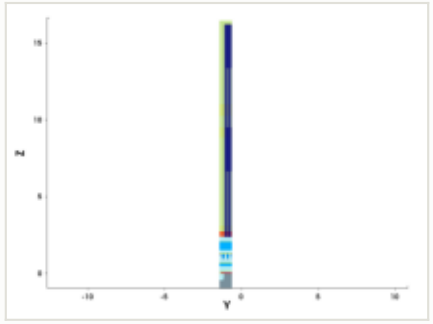

y cut at -1.035 µm

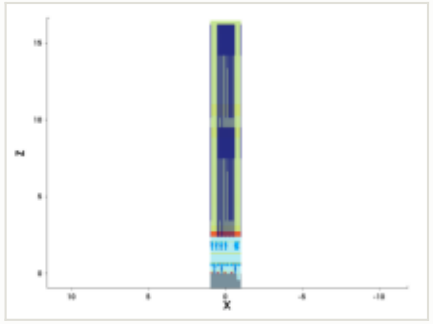

mask for this step

no mask for this step

steps by process area

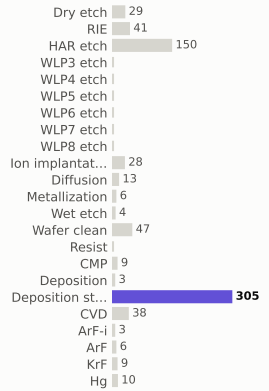

materials deposited (g)

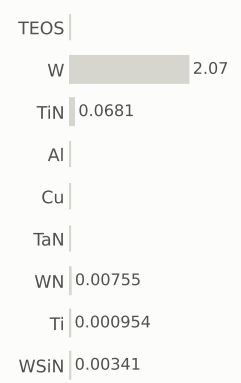

gases emitted (g)

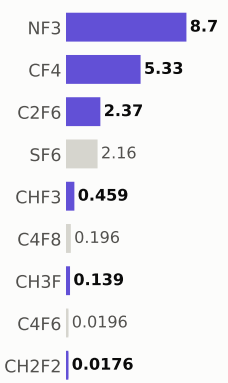

Step #8690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	911.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 578.3 of 1,872.8 (this step +0.328)

MPW materials — 56.5 of 132.5 (this step +0.0159)

GPW gases — 276.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

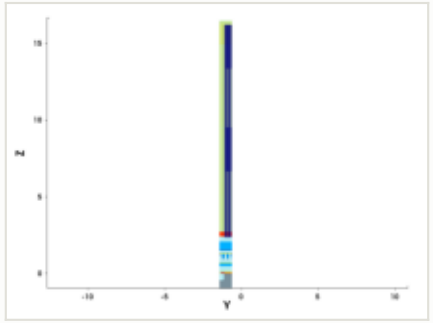

y cut at -1.035 µm

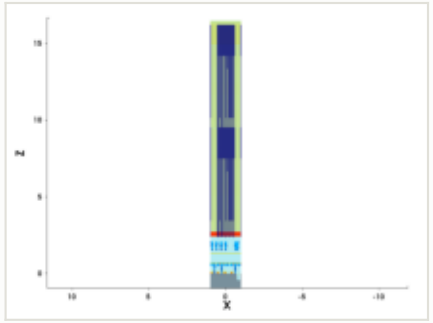

mask for this step

no mask for this step

steps by process area

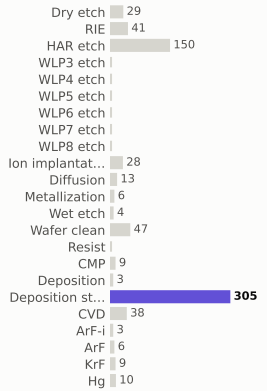

materials deposited (g)

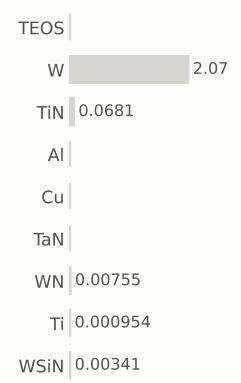

gases emitted (g)

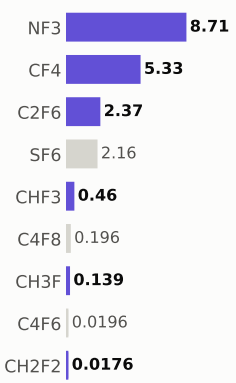

Step #8700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	911.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 578.6 of 1,872.8 (this step +0.328)

MPW materials — 56.5 of 132.5 (this step +0.0159)

GPW gases — 276.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

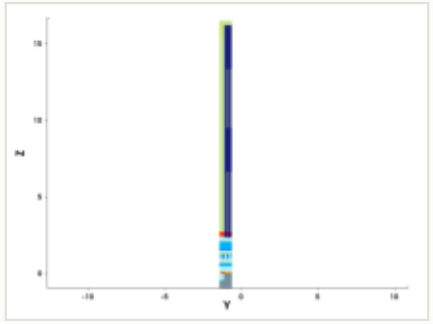

y cut at -1.035 µm

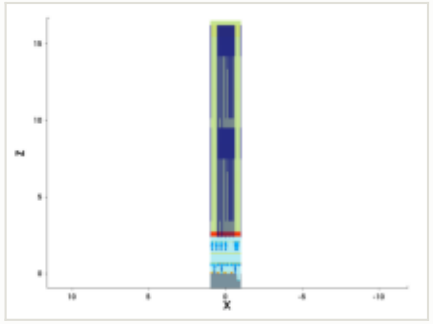

mask for this step

no mask for this step

steps by process area

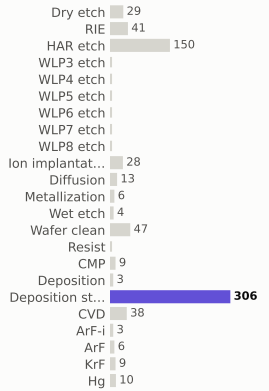

materials deposited (g)

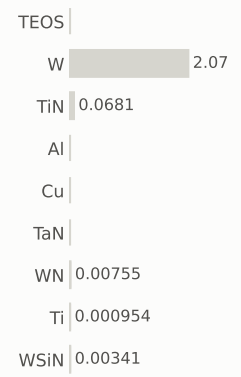

gases emitted (g)

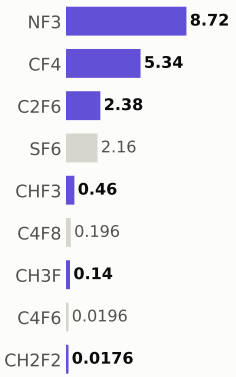

Step #8710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	912.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

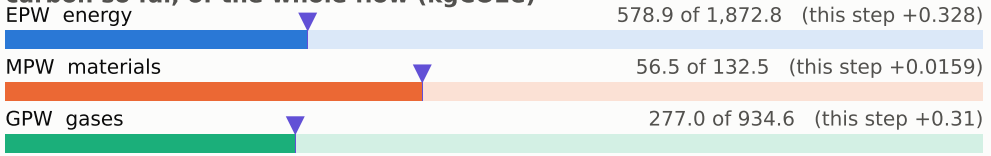

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

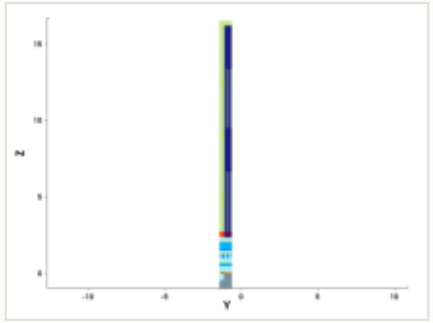

y cut at -1.035 µm

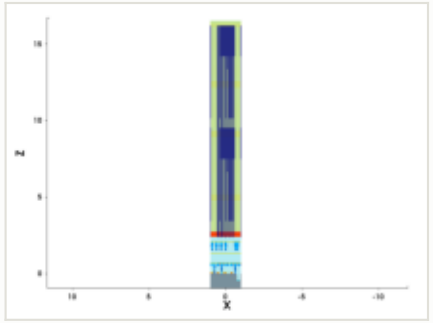

mask for this step

no mask for this step

steps by process area

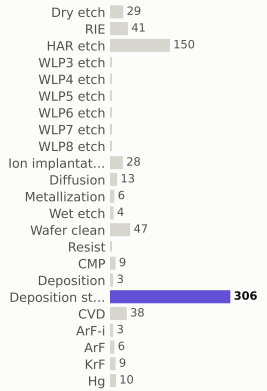

materials deposited (g)

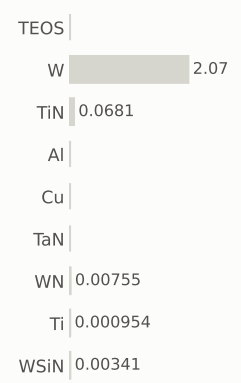

gases emitted (g)

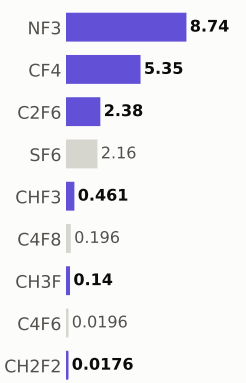

Step #8720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	913.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

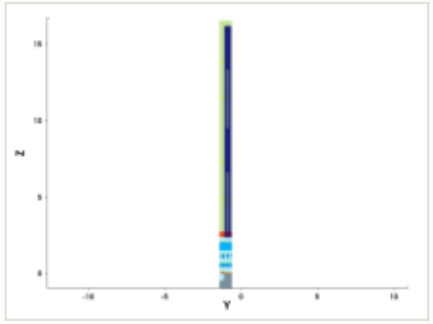

y cut at -1.035 µm

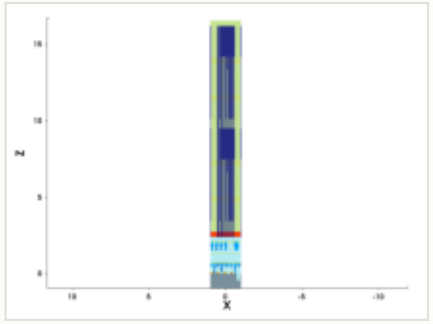

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 579.2 of 1,872.8 (this step +0.328)

MPW materials — 56.5 of 132.5 (this step +0.0159)

GPW gases — 277.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

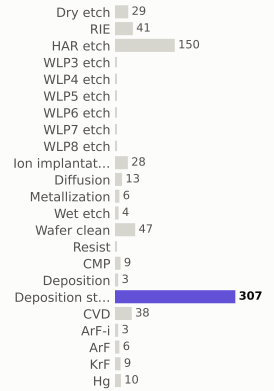

materials deposited (g)

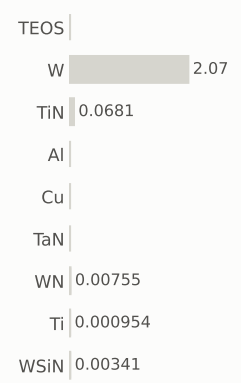

gases emitted (g)

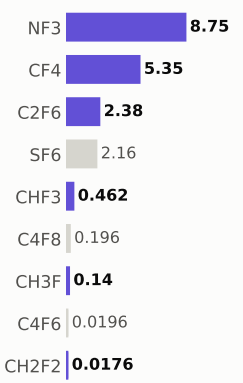

Step #8730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	913.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

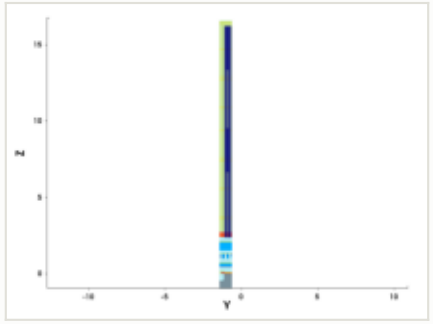

y cut at -1.035 µm

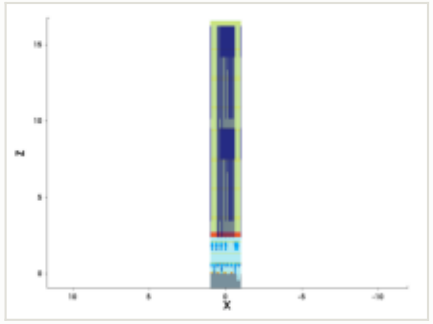

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 579.6 of 1,872.8 (this step +0.328)

MPW materials — 56.5 of 132.5 (this step +0.0159)

GPW gases — 277.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

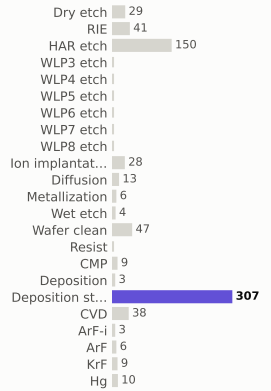

materials deposited (g)

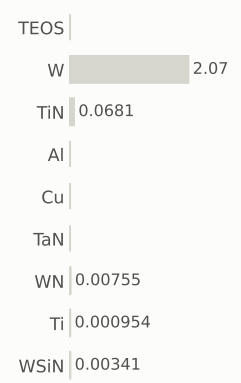

gases emitted (g)

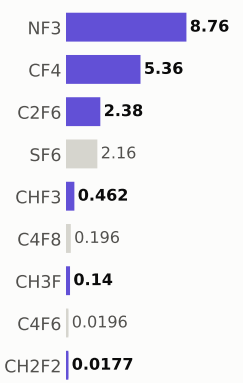

Step #8740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	914.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

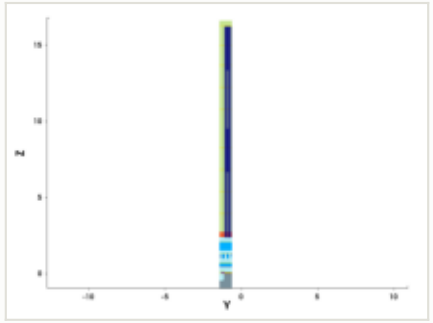

y cut at -1.035 µm

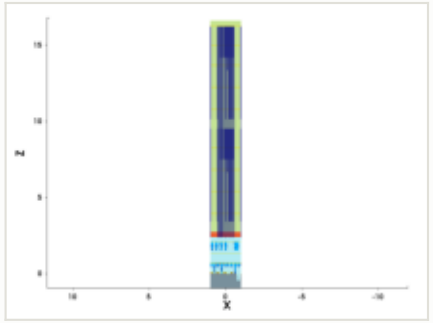

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 579.9 of 1,872.8 (this step +0.328)

MPW materials — 56.5 of 132.5 (this step +0.0159)

GPW gases — 278.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

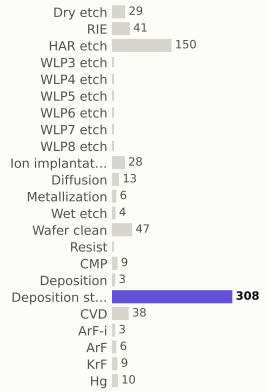

materials deposited (g)

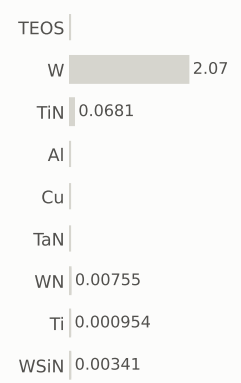

gases emitted (g)

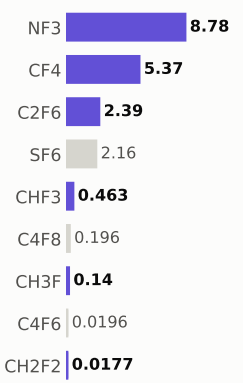

Step #8750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	915.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

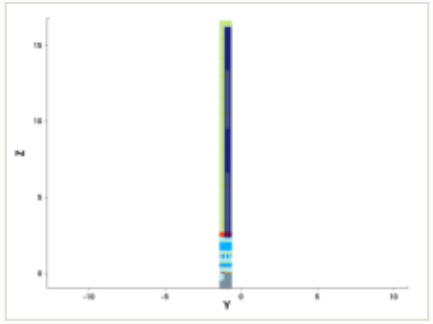

y cut at -1.035 µm

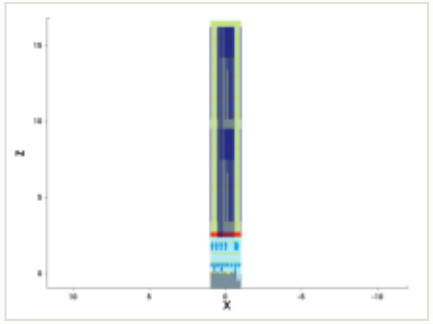

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 580.2 of 1,872.8 (this step +0.328)

MPW materials — 56.5 of 132.5 (this step +0.0159)

GPW gases — 278.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

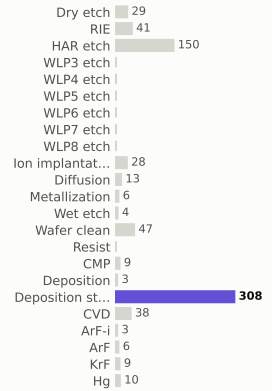

materials deposited (g)

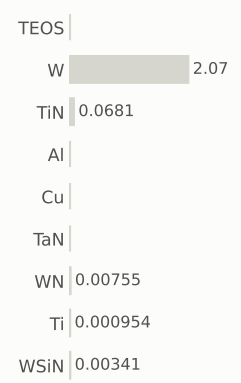

gases emitted (g)

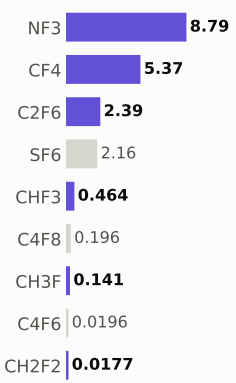

Step #8760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	915.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

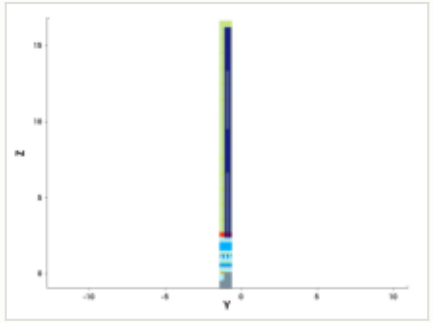

y cut at -1.035 µm

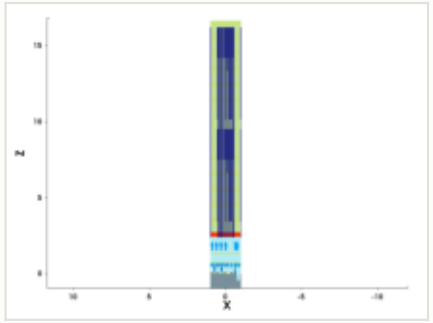

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 580.6 of 1,872.8 (this step +0.328)

MPW materials — 56.6 of 132.5 (this step +0.0159)

GPW gases — 278.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

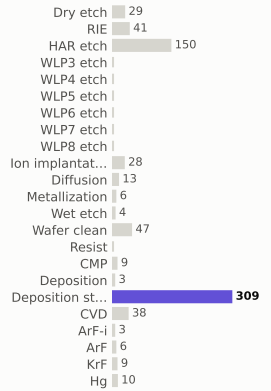

materials deposited (g)

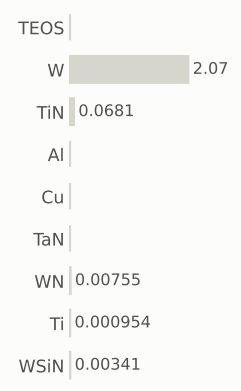

gases emitted (g)

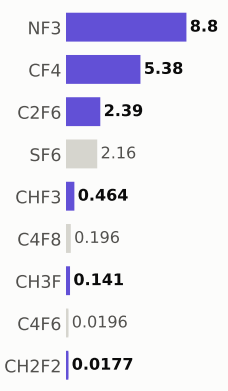

Step #8770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	916.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 580.9 of 1,872.8 (this step +0.328)

MPW materials — 56.6 of 132.5 (this step +0.0159)

GPW gases — 278.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

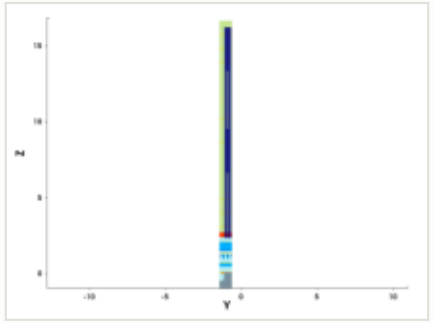

y cut at -1.035 µm

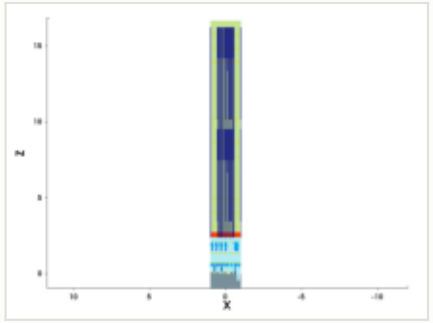

mask for this step

no mask for this step

steps by process area

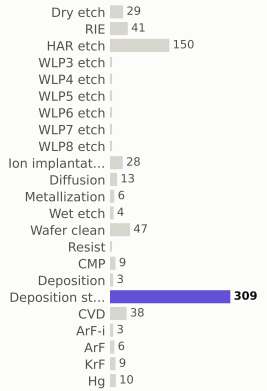

materials deposited (g)

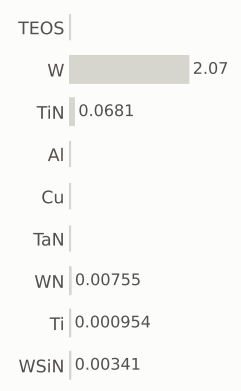

gases emitted (g)

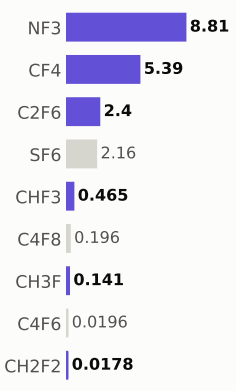

Step #8780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	917.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

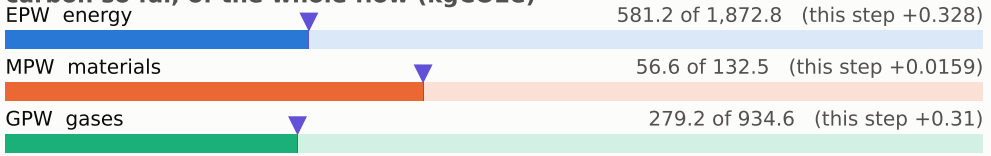

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

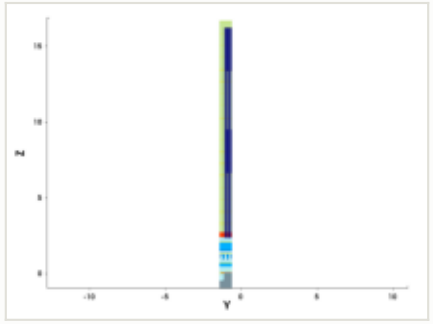

y cut at -1.035 µm

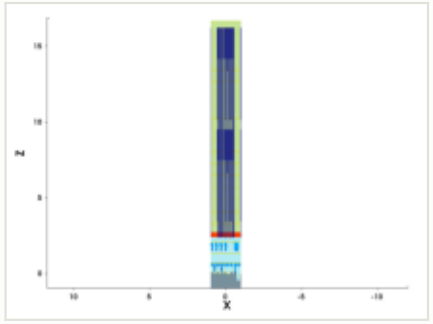

mask for this step

no mask for this step

steps by process area

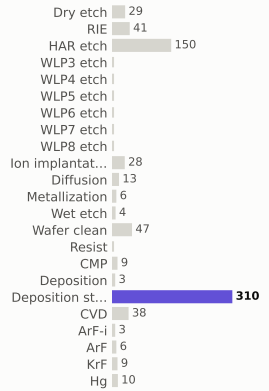

materials deposited (g)

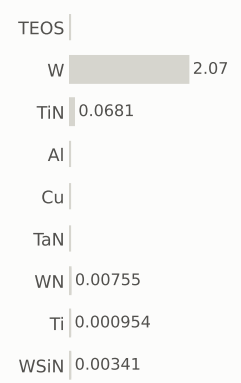

gases emitted (g)

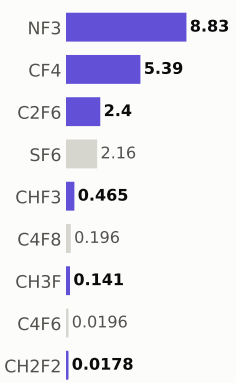

Step #8790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	917.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 581.5 of 1,872.8 (this step +0.328)

MPW materials — 56.6 of 132.5 (this step +0.0159)

GPW gases — 279.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

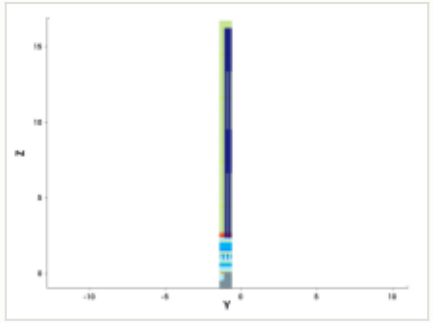

y cut at -1.035 µm

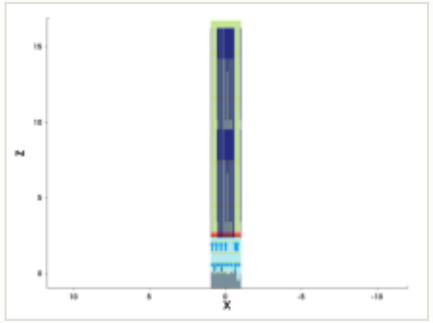

mask for this step

no mask for this step

steps by process area

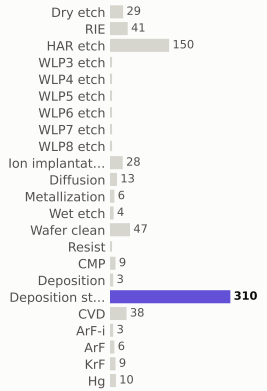

materials deposited (g)

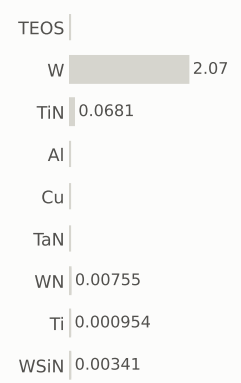

gases emitted (g)

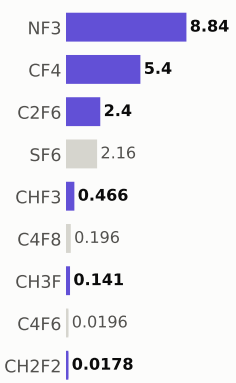

Step #8800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	918.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 581.9 of 1,872.8 (this step +0.328)

MPW materials — 56.6 of 132.5 (this step +0.0159)

GPW gases — 279.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

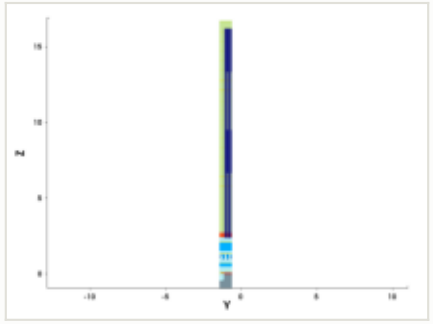

y cut at -1.035 µm

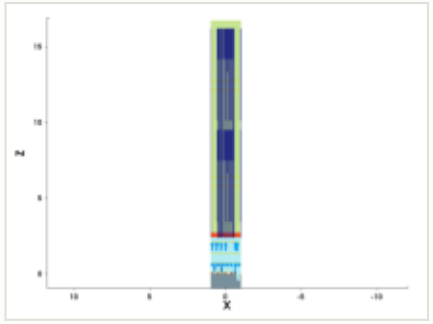

mask for this step

no mask for this step

steps by process area

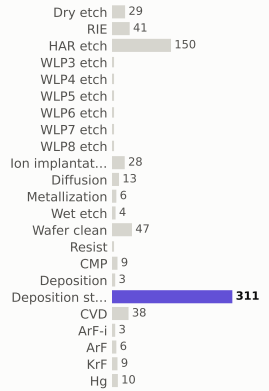

materials deposited (g)

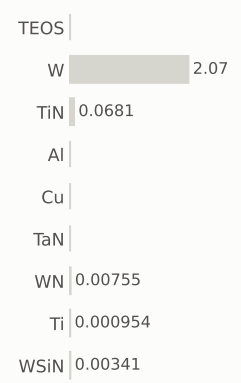

gases emitted (g)

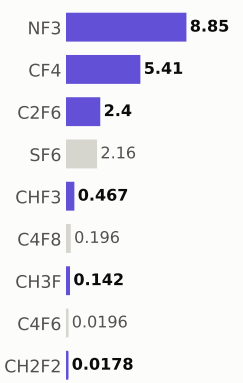

Step #8810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	919.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

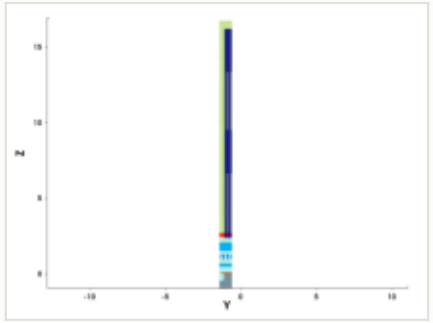

y cut at -1.035 µm

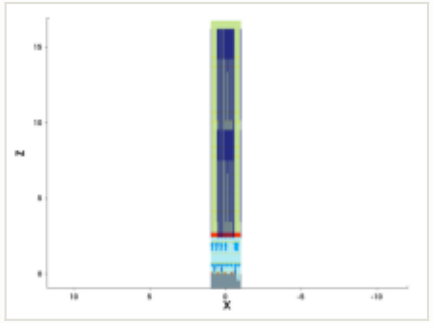

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 582.2 of 1,872.8 (this step +0.328)

MPW materials — 56.6 of 132.5 (this step +0.0159)

GPW gases — 280.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

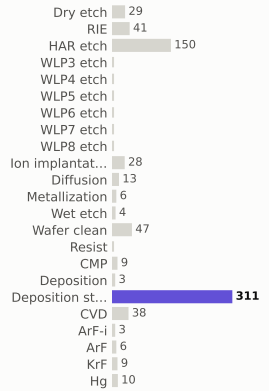

materials deposited (g)

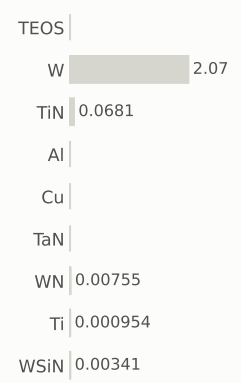

gases emitted (g)

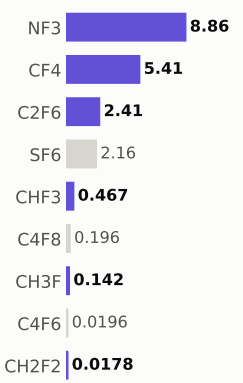

Step #8820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	919.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

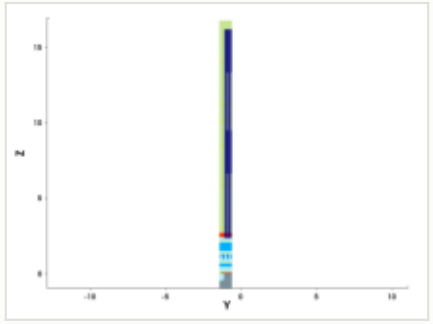

y cut at -1.035 µm

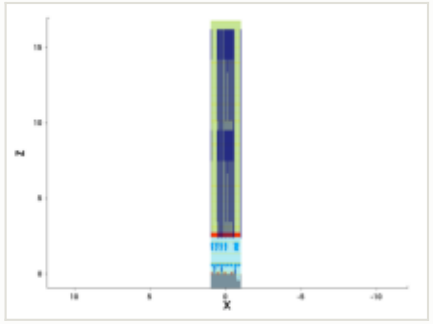

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 582.5 of 1,872.8 (this step +0.328)

MPW materials — 56.7 of 132.5 (this step +0.0159)

GPW gases — 280.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

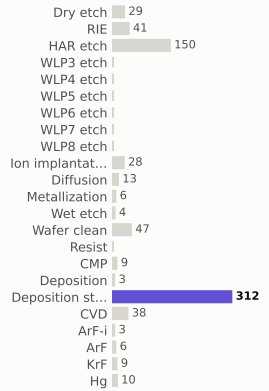

materials deposited (g)

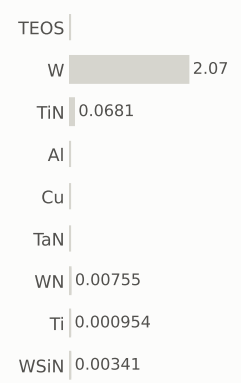

gases emitted (g)

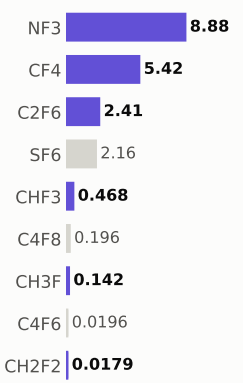

Step #8830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	920.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

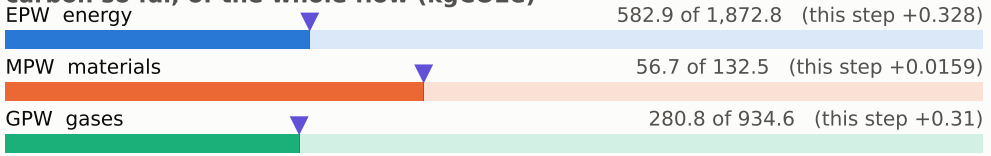

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

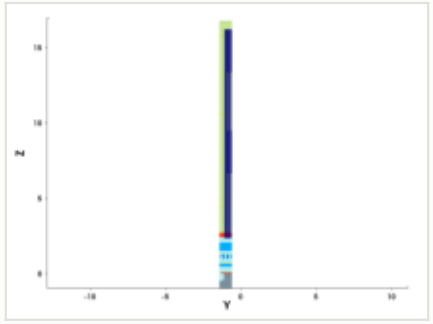

y cut at -1.035 µm

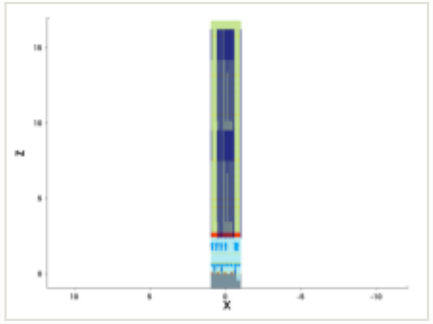

mask for this step

no mask for this step

steps by process area

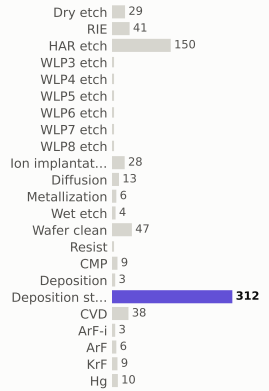

materials deposited (g)

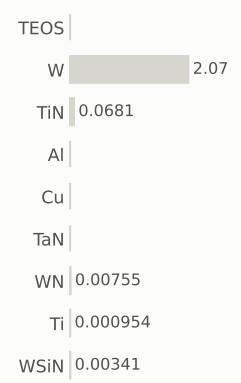

gases emitted (g)

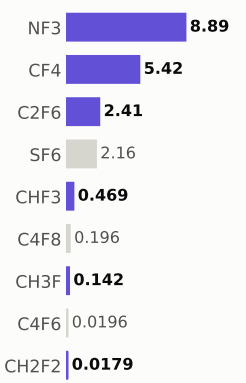

Step #8840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	920.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

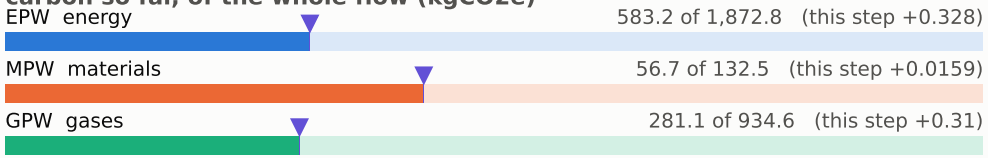

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

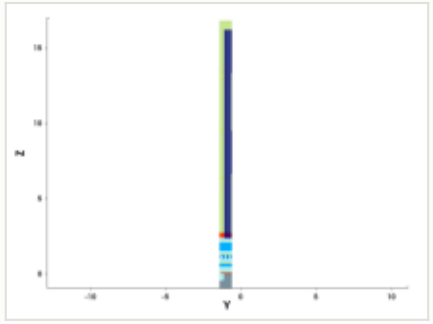

y cut at -1.035 µm

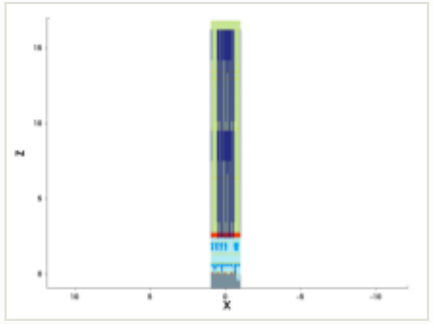

mask for this step

no mask for this step

steps by process area

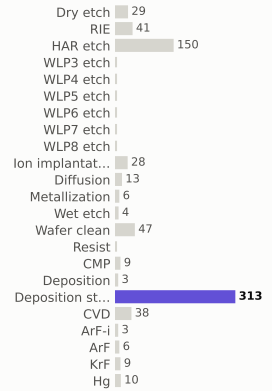

materials deposited (g)

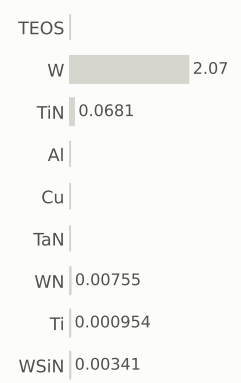

gases emitted (g)

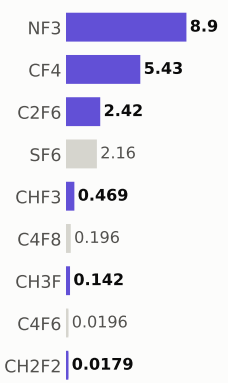

Step #8850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	921.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

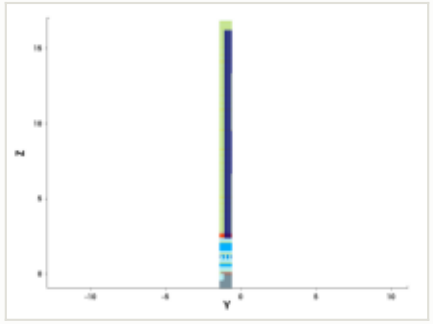

y cut at -1.035 µm

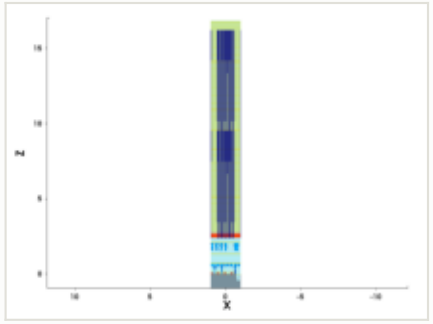

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 583.5 of 1,872.8 (this step +0.328)

MPW materials — 56.7 of 132.5 (this step +0.0159)

GPW gases — 281.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

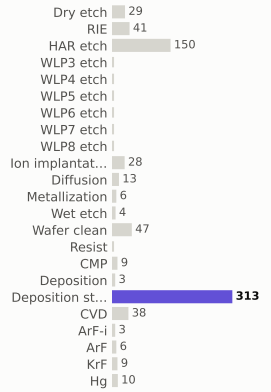

materials deposited (g)

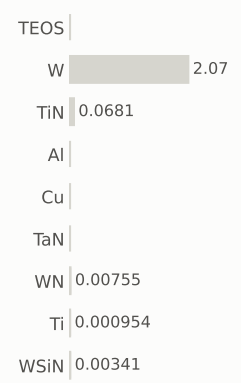

gases emitted (g)

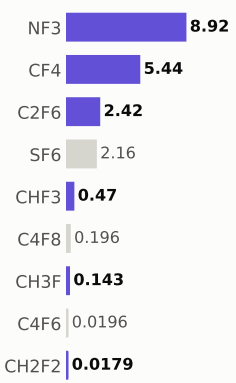

Step #8860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	922.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

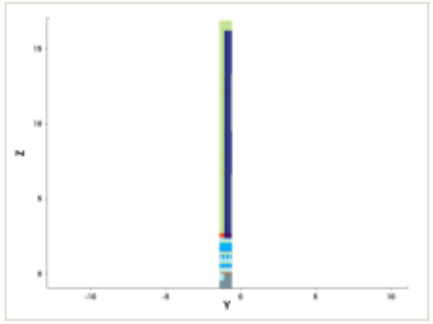

y cut at -1.035 µm

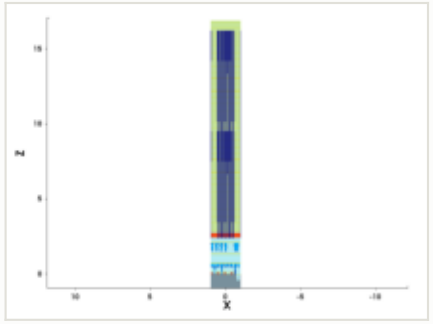

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 583.8 of 1,872.8 (this step +0.328)

MPW materials — 56.7 of 132.5 (this step +0.0159)

GPW gases — 281.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

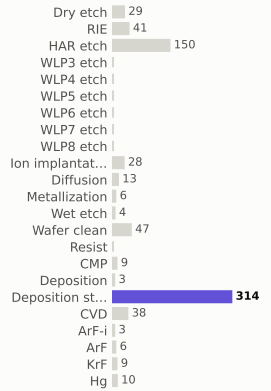

materials deposited (g)

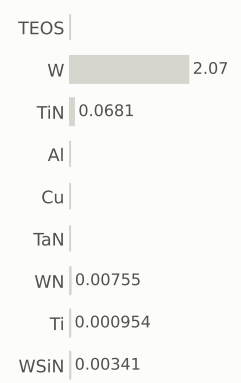

gases emitted (g)

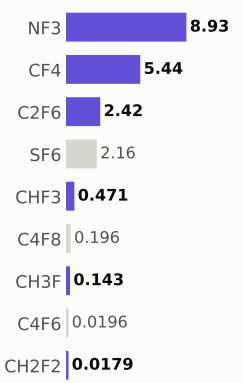

Step #8870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	922.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 584.2 of 1,872.8 (this step +0.328)

MPW materials — 56.7 of 132.5 (this step +0.0159)

GPW gases — 282.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

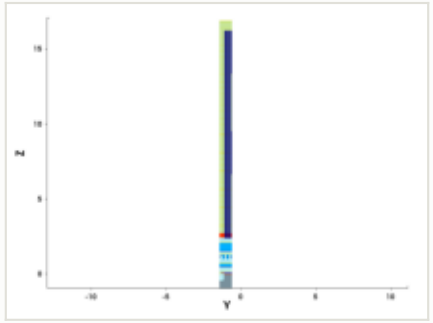

y cut at -1.035 µm

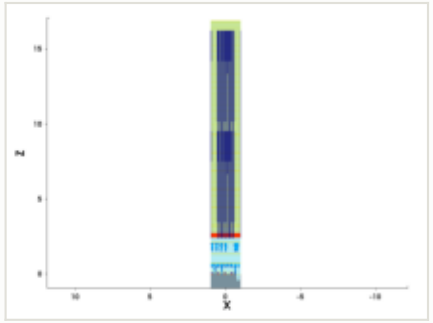

mask for this step

no mask for this step

steps by process area

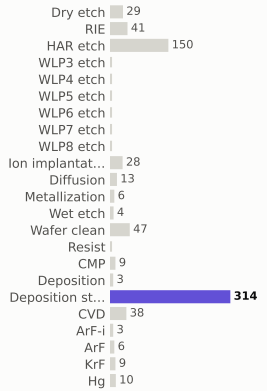

materials deposited (g)

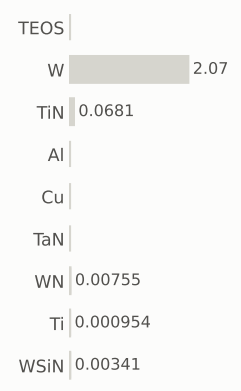

gases emitted (g)

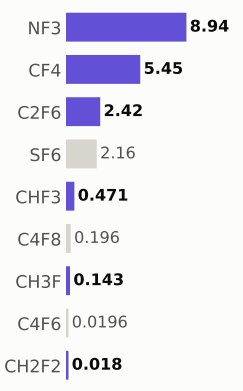

Step #8880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	923.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 584.5 of 1,872.8 (this step +0.328)

MPW materials — 56.8 of 132.5 (this step +0.0159)

GPW gases — 282.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

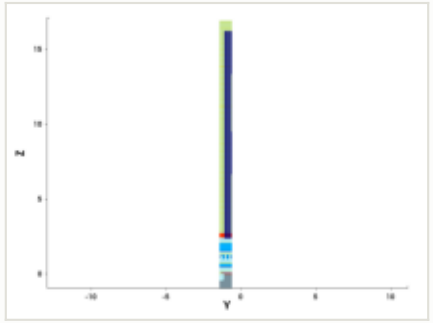

y cut at -1.035 µm

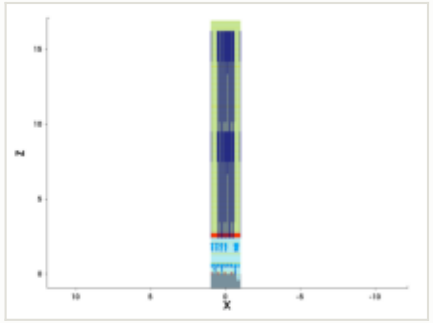

mask for this step

no mask for this step

steps by process area

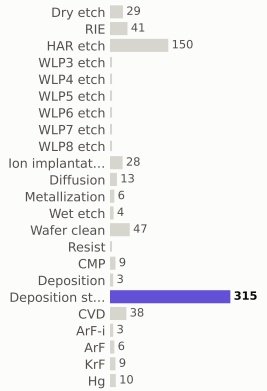

materials deposited (g)

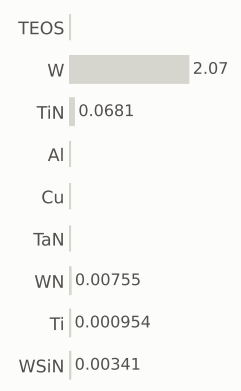

gases emitted (g)

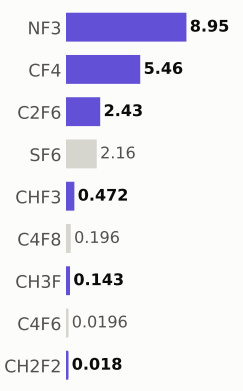

Step #8890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	924.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 584.8 of 1,872.8 (this step +0.328)

MPW materials — 56.8 of 132.5 (this step +0.0159)

GPW gases — 282.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

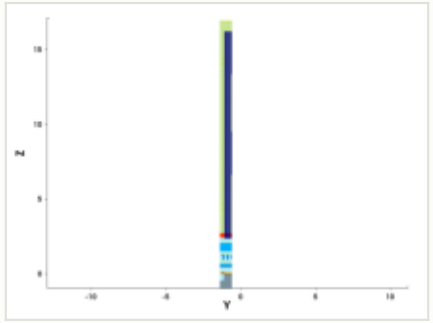

y cut at -1.035 µm

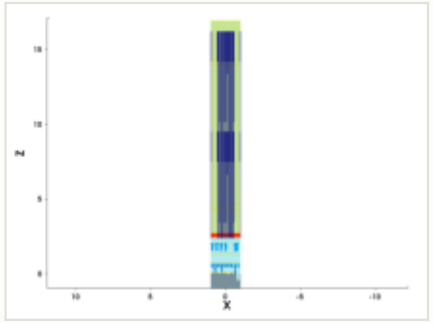

mask for this step

no mask for this step

steps by process area

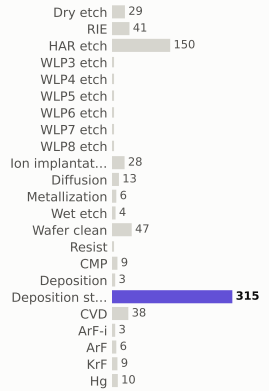

materials deposited (g)

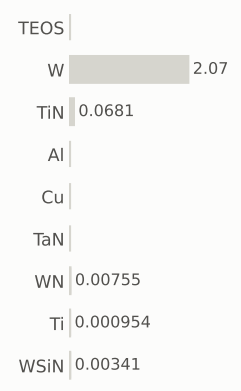

gases emitted (g)

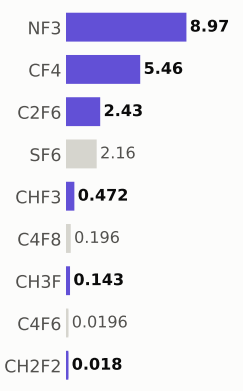

Step #8900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	924.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 585.2 of 1,872.8 (this step +0.328)

MPW materials — 56.8 of 132.5 (this step +0.0159)

GPW gases — 282.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

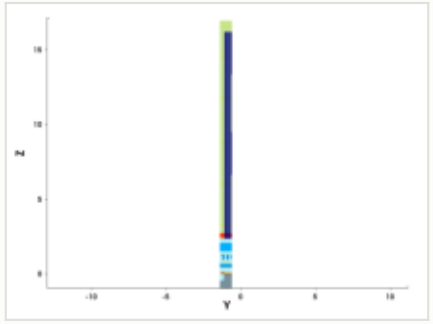

y cut at -1.035 µm

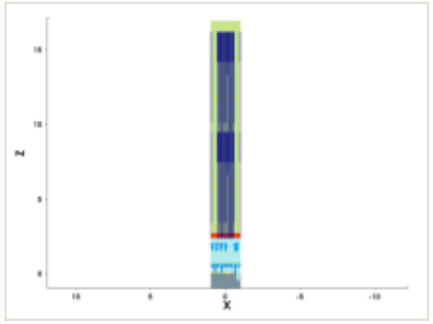

mask for this step

no mask for this step

steps by process area

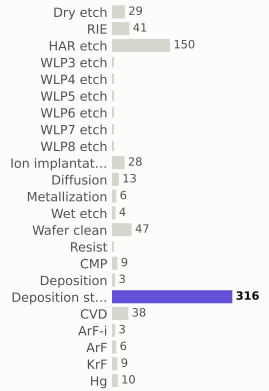

materials deposited (g)

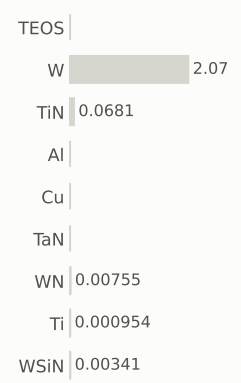

gases emitted (g)

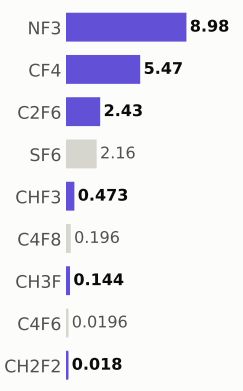

Step #8910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	925.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

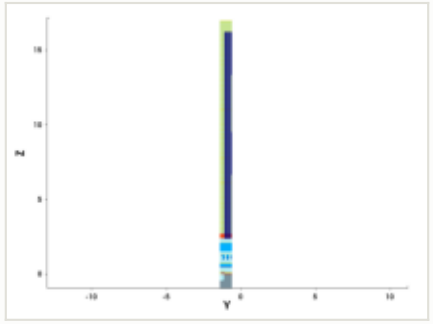

y cut at -1.035 µm

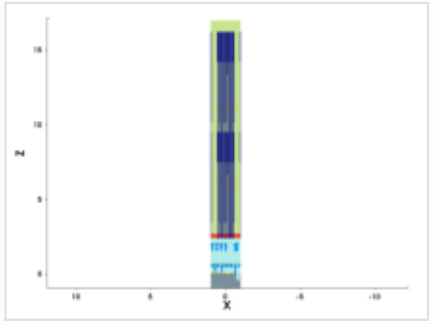

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 585.5 of 1,872.8 (this step +0.328)

MPW materials — 56.8 of 132.5 (this step +0.0159)

GPW gases — 283.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

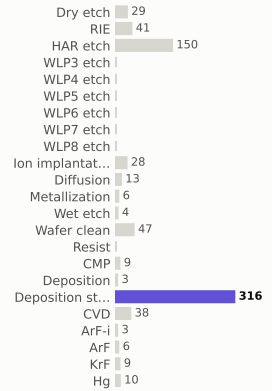

materials deposited (g)

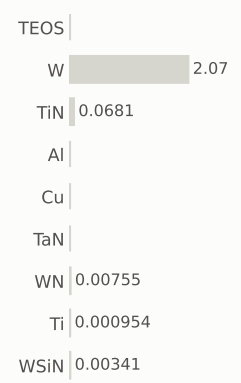

gases emitted (g)

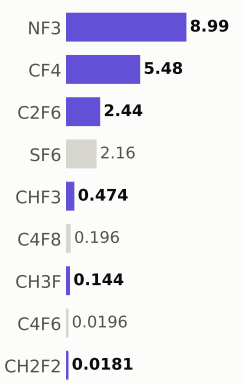

Step #8920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	926.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

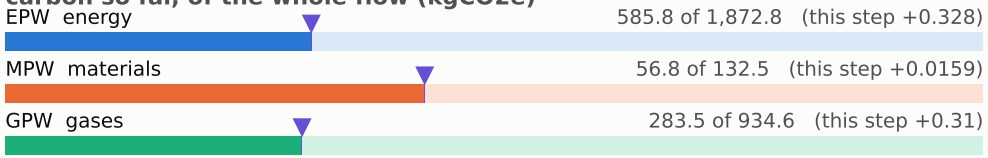

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

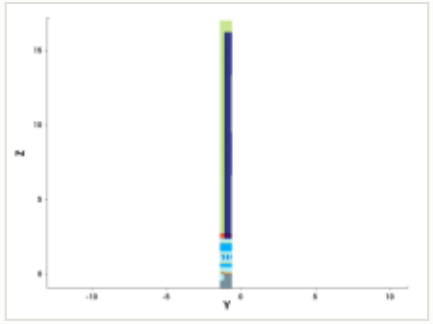

y cut at -1.035 µm

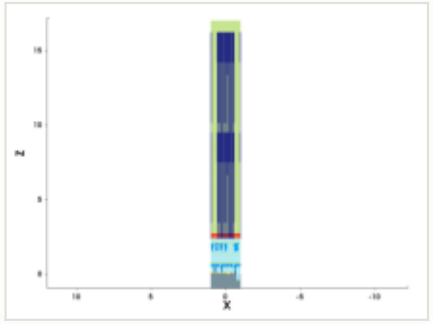

mask for this step

no mask for this step

steps by process area

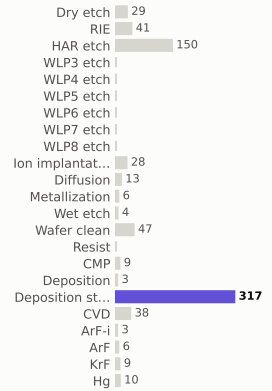

materials deposited (g)

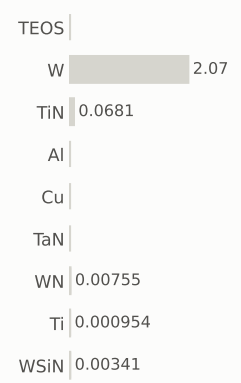

gases emitted (g)

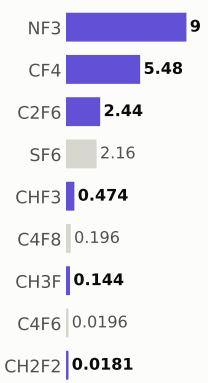

Step #8930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	926.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

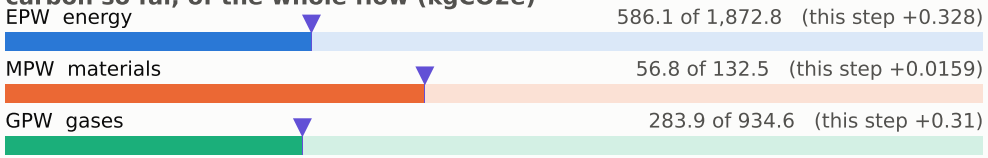

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

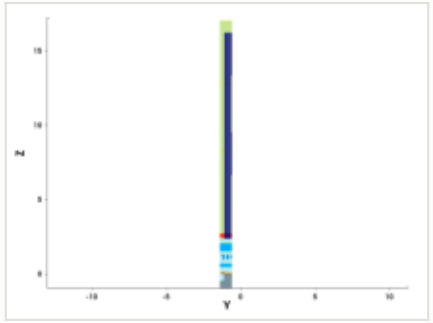

y cut at -1.035 µm

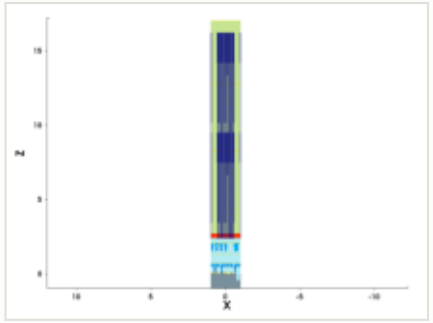

mask for this step

no mask for this step

steps by process area

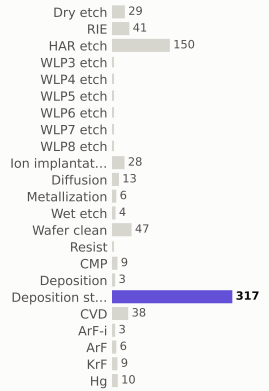

materials deposited (g)

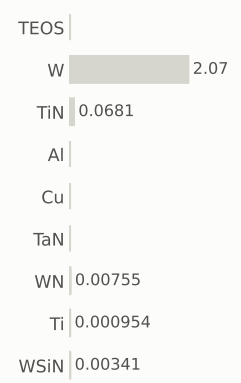

gases emitted (g)

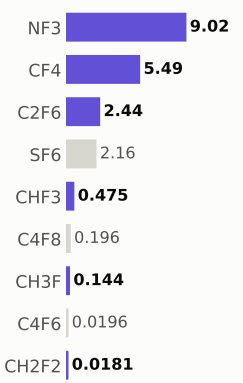

Step #8940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	927.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

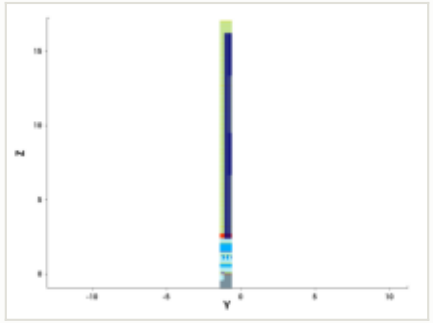

y cut at -1.035 µm

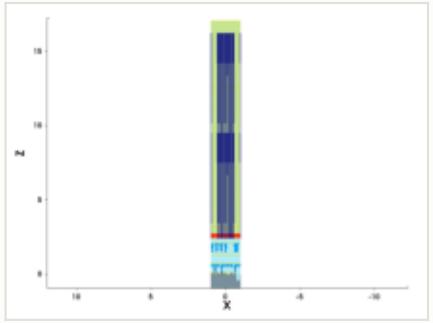

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 586.5 of 1,872.8 (this step +0.328)

MPW materials — 56.9 of 132.5 (this step +0.0159)

GPW gases — 284.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

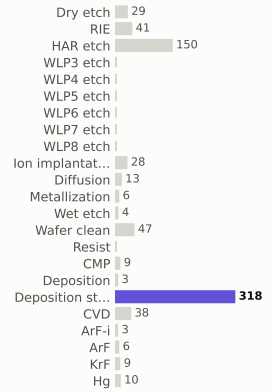

materials deposited (g)

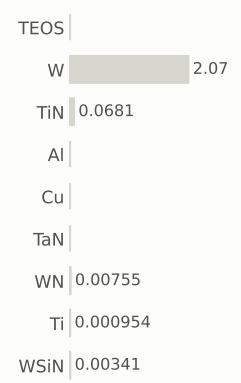

gases emitted (g)

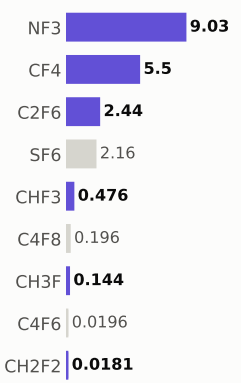

Step #8950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	928.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

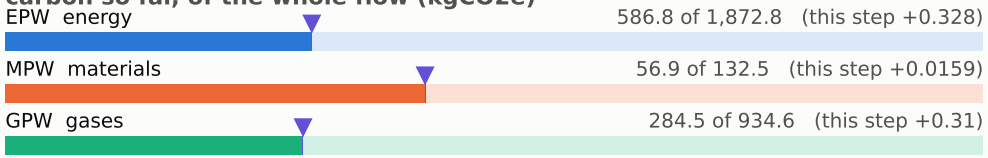

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

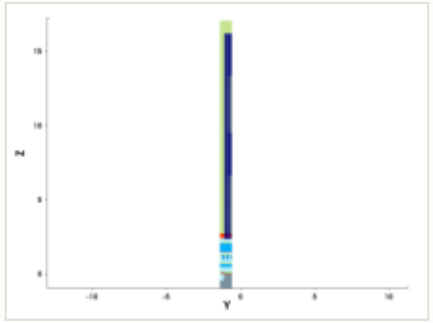

y cut at -1.035 µm

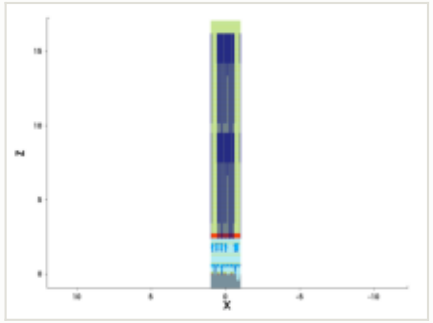

mask for this step

no mask for this step

steps by process area

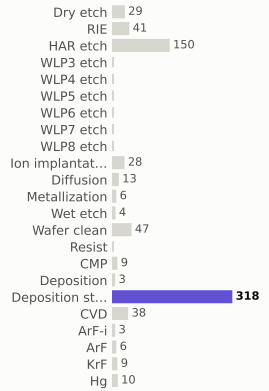

materials deposited (g)

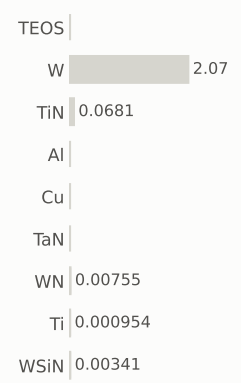

gases emitted (g)

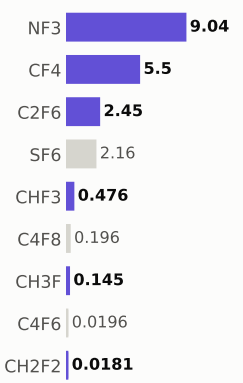

Step #8960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	928.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

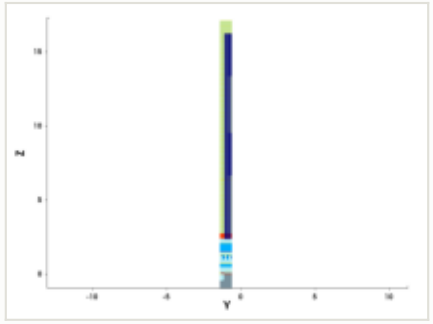

y cut at -1.035 µm

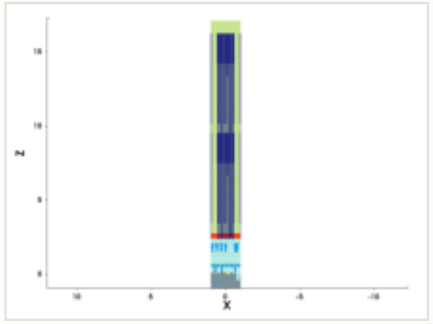

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 587.1 of 1,872.8 (this step +0.328)

MPW materials — 56.9 of 132.5 (this step +0.0159)

GPW gases — 284.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

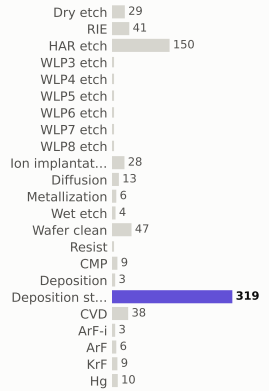

materials deposited (g)

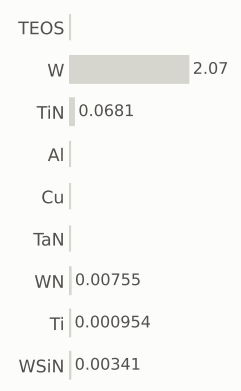

gases emitted (g)

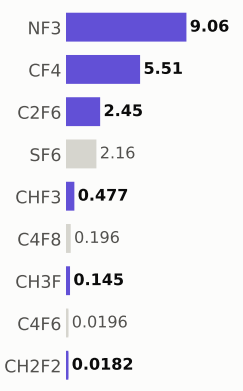

Step #8970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	929.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

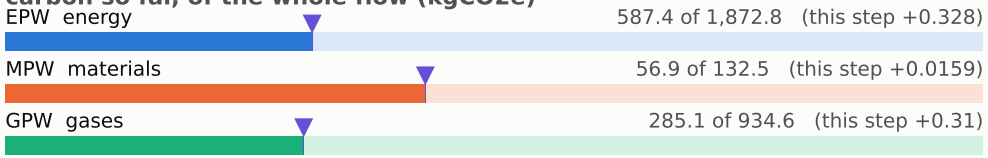

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

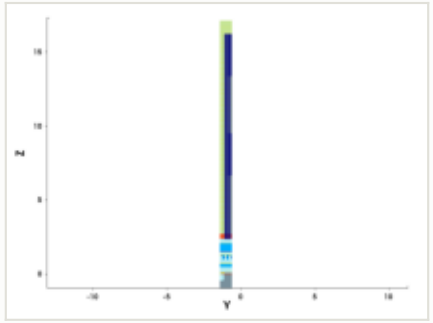

y cut at -1.035 µm

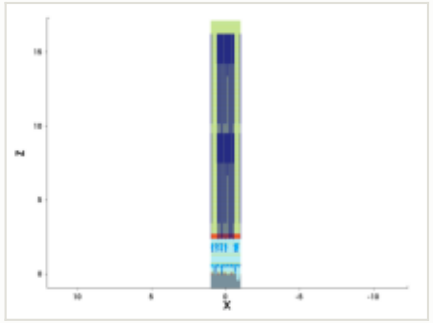

mask for this step

no mask for this step

steps by process area

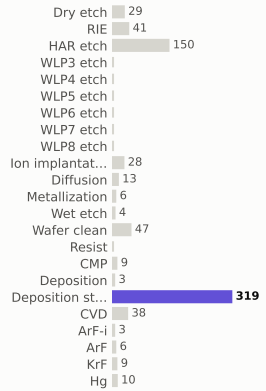

materials deposited (g)

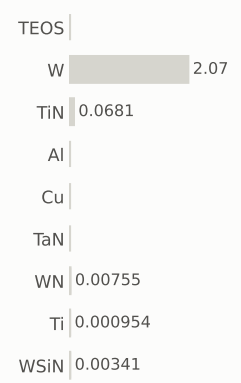

gases emitted (g)

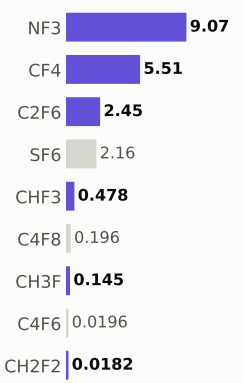

Step #8980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	930.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 587.8 of 1,872.8 (this step +0.328)

MPW materials — 56.9 of 132.5 (this step +0.0159)

GPW gases — 285.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

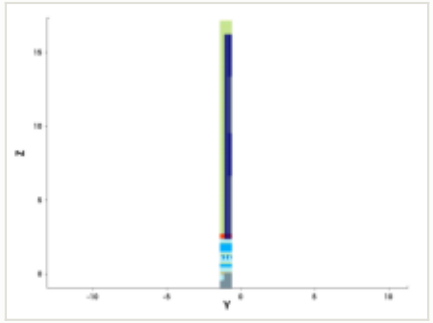

y cut at -1.035 µm

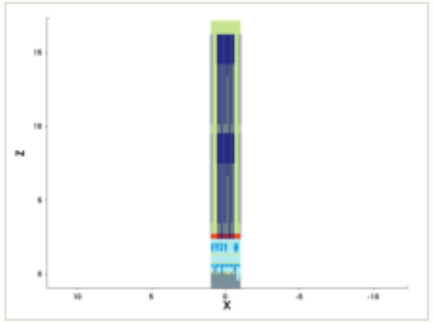

mask for this step

no mask for this step

steps by process area

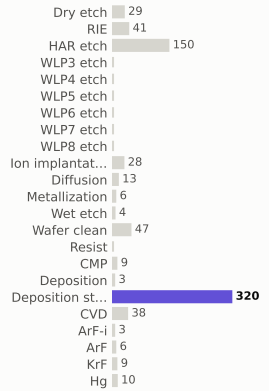

materials deposited (g)

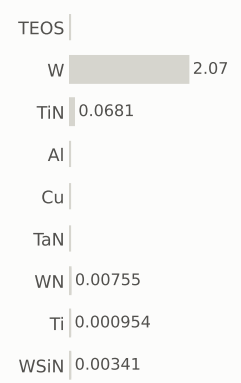

gases emitted (g)

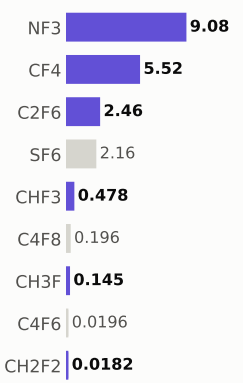

Step #8990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	930.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

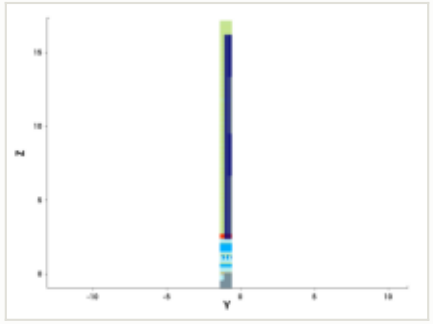

y cut at -1.035 µm

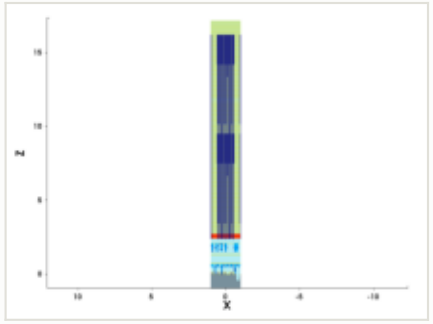

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 588.1 of 1,872.8 (this step +0.328)

MPW materials — 56.9 of 132.5 (this step +0.0159)

GPW gases — 285.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

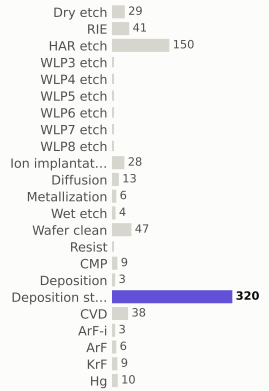

materials deposited (g)

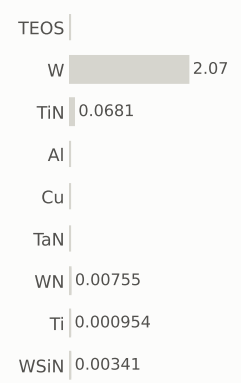

gases emitted (g)

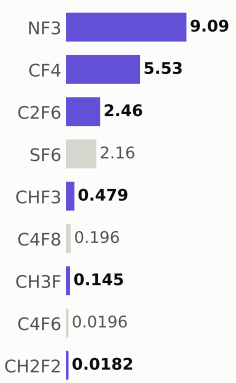

Step #9000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	931.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

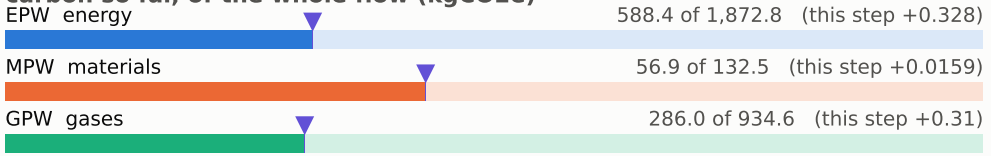

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

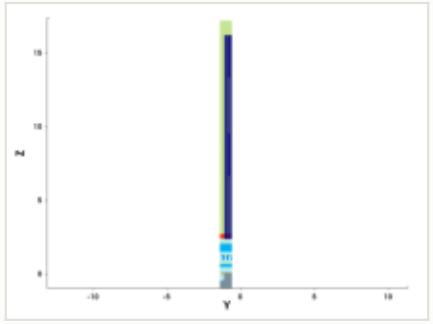

y cut at -1.035 µm

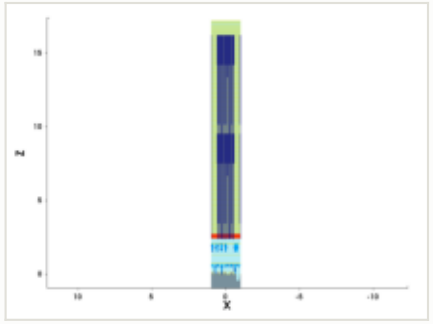

mask for this step

no mask for this step

steps by process area

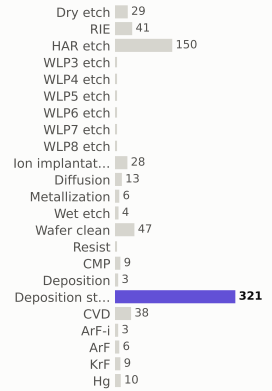

materials deposited (g)

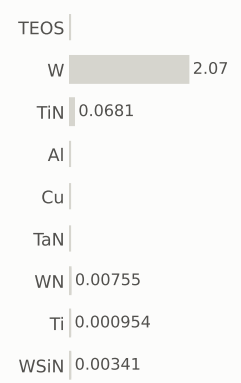

gases emitted (g)

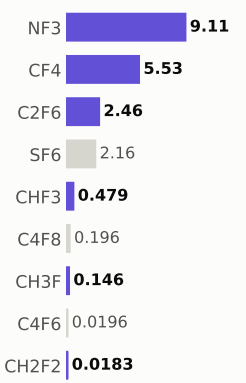

Step #9010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	932.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

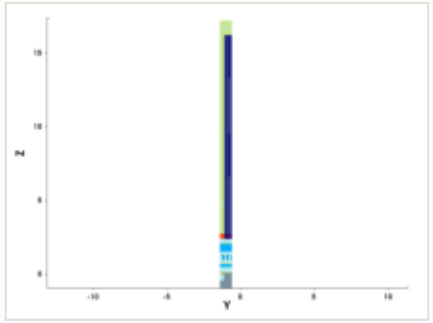

y cut at -1.035 µm

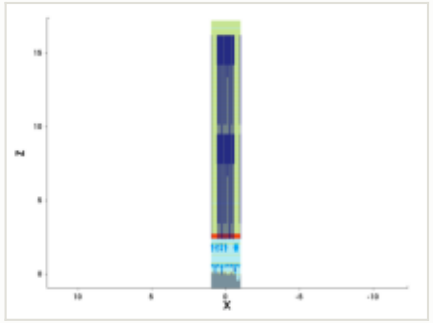

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

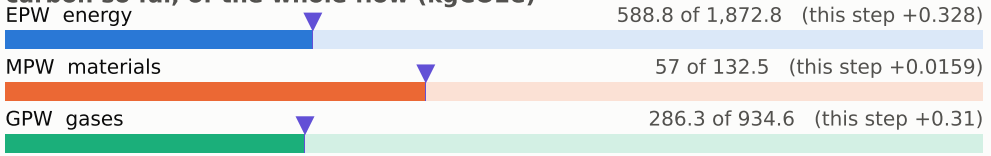

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

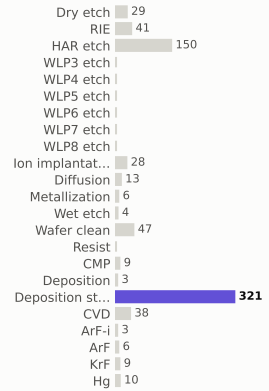

materials deposited (g)

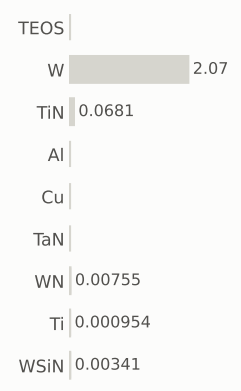

gases emitted (g)

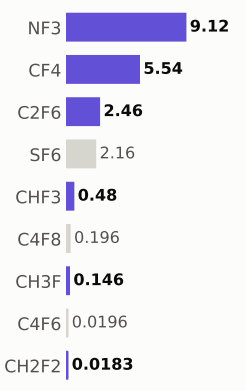

Step #9020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	932.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

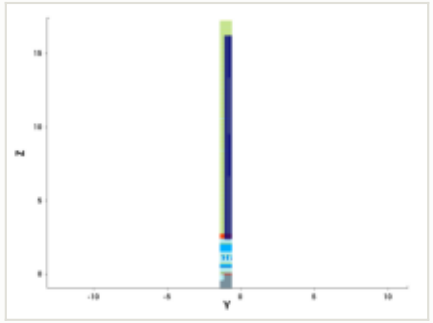

y cut at -1.035 µm

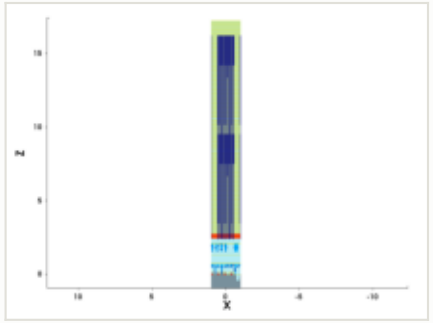

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 589.1 of 1,872.8 (this step +0.328)

MPW materials — 57 of 132.5 (this step +0.0159)

GPW gases — 286.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

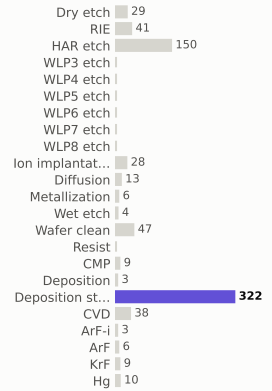

materials deposited (g)

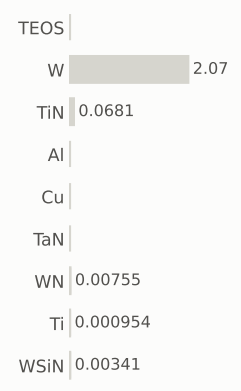

gases emitted (g)

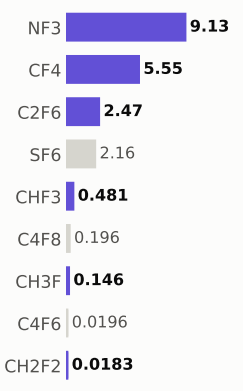

Step #9030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	933.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

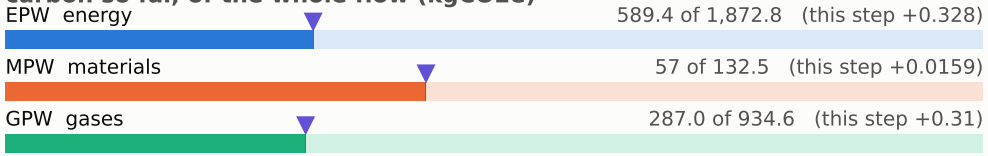

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

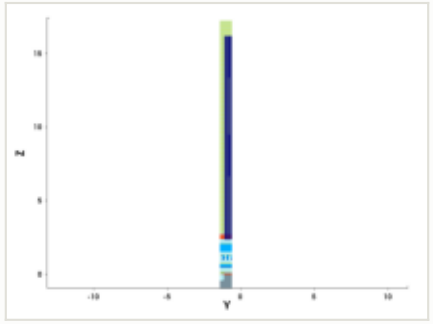

y cut at -1.035 µm

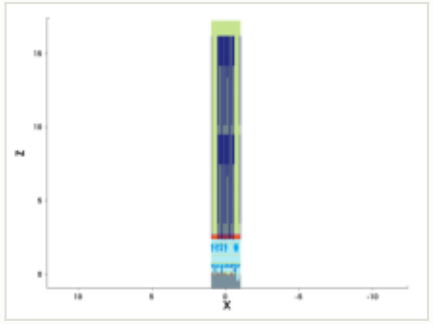

mask for this step

no mask for this step

steps by process area

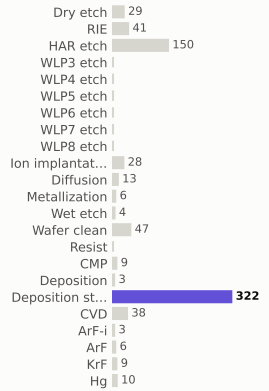

materials deposited (g)

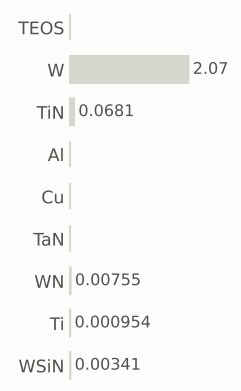

gases emitted (g)

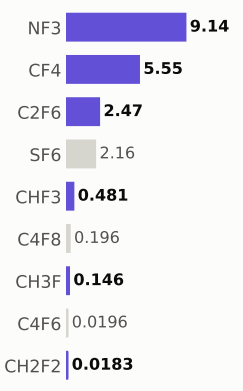

Step #9040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	934.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

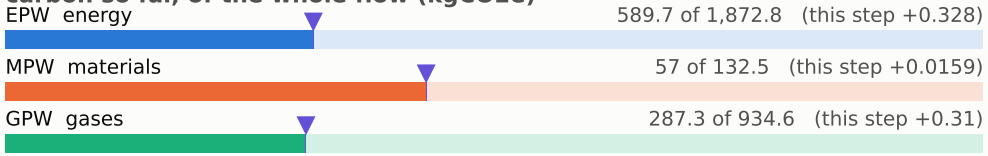

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

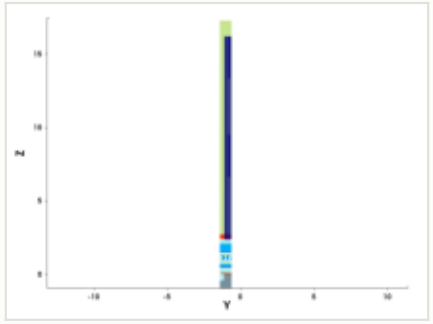

y cut at -1.035 µm

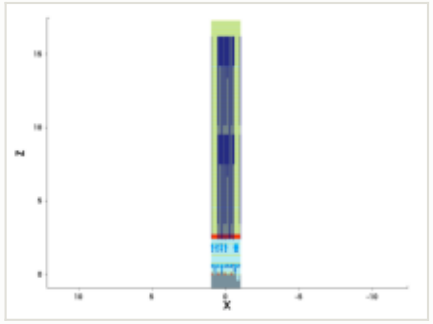

mask for this step

no mask for this step

steps by process area

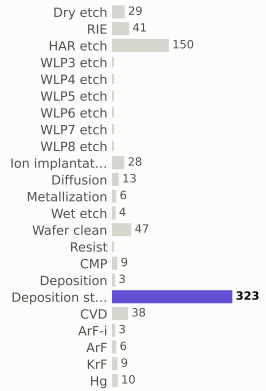

materials deposited (g)

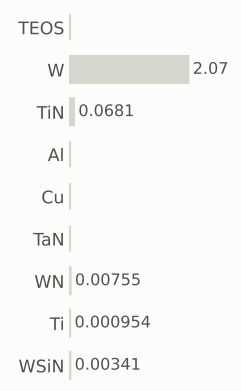

gases emitted (g)

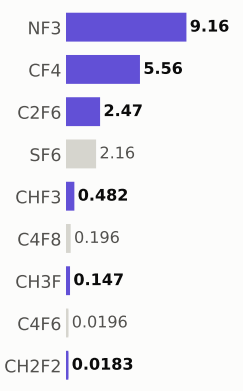

Step #9050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	934.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

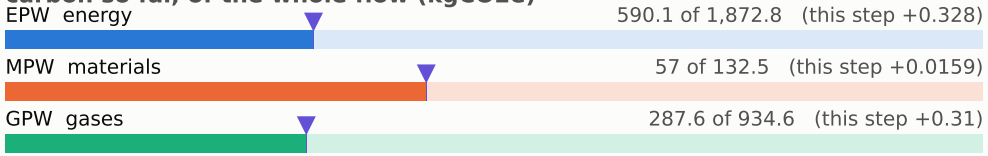

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

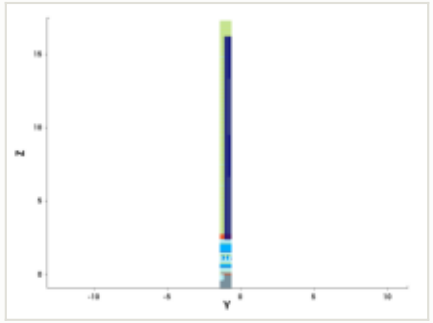

y cut at -1.035 µm

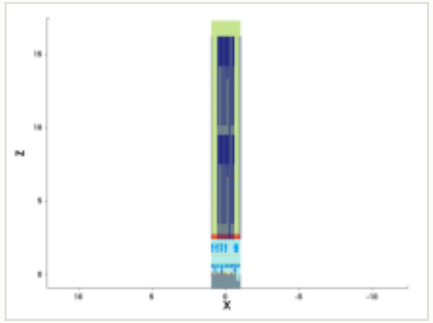

mask for this step

no mask for this step

steps by process area

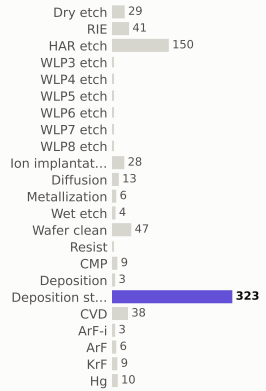

materials deposited (g)

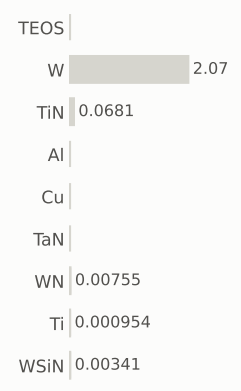

gases emitted (g)



Step #9060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	935.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

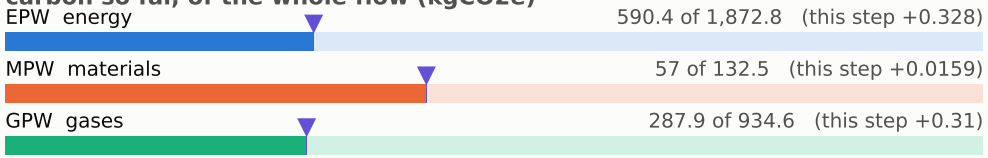

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

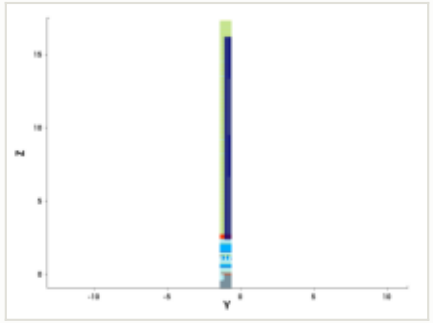

y cut at -1.035 µm

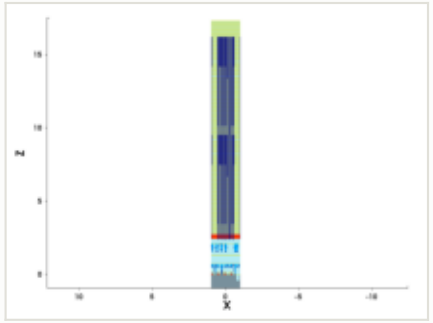

mask for this step

no mask for this step

steps by process area

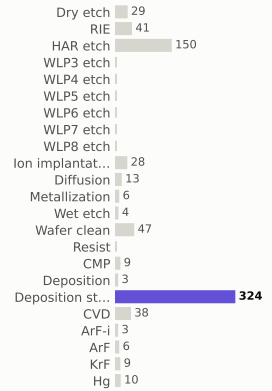

materials deposited (g)

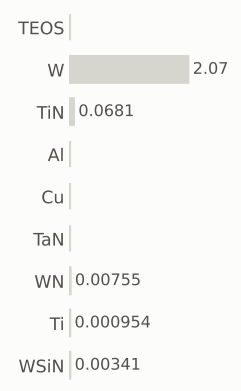

gases emitted (g)

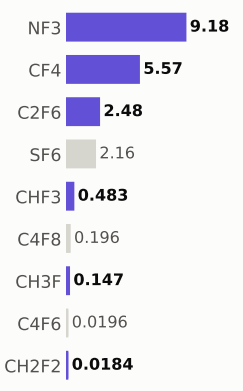

Step #9070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	936.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 590.7 of 1,872.8 (this step +0.328)

MPW materials — 57.1 of 132.5 (this step +0.0159)

GPW gases — 288.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

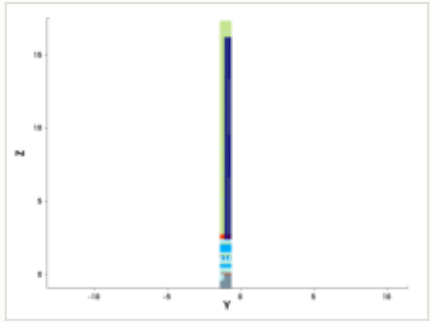

y cut at -1.035 µm

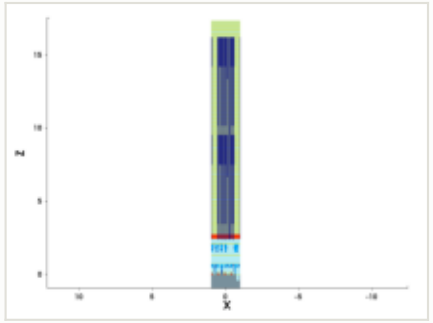

mask for this step

no mask for this step

steps by process area

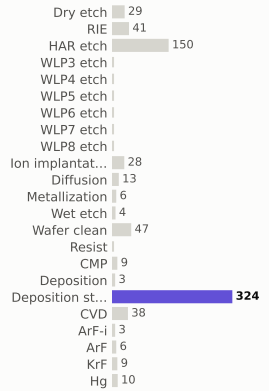

materials deposited (g)

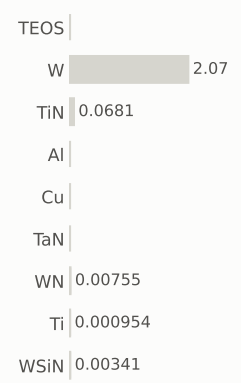

gases emitted (g)

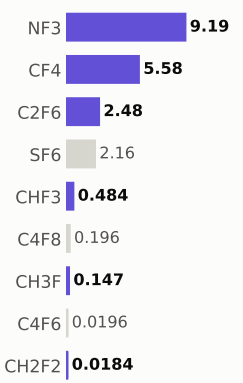

Step #9080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	936.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 591.1 of 1,872.8 (this step +0.328)

MPW materials — 57.1 of 132.5 (this step +0.0159)

GPW gases — 288.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

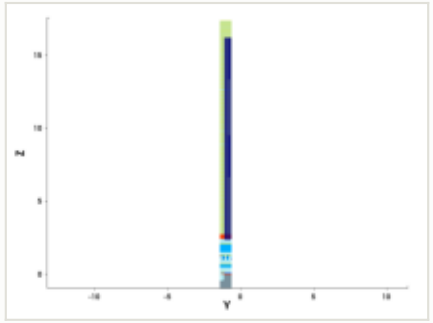

y cut at -1.035 µm

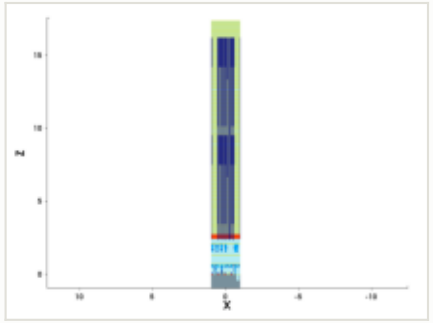

mask for this step

no mask for this step

steps by process area

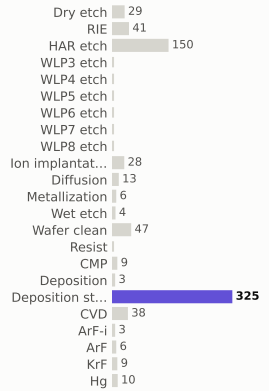

materials deposited (g)

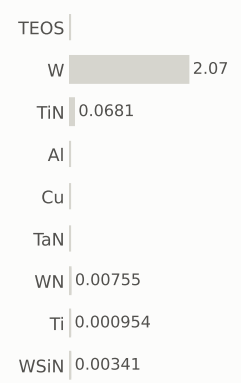

gases emitted (g)

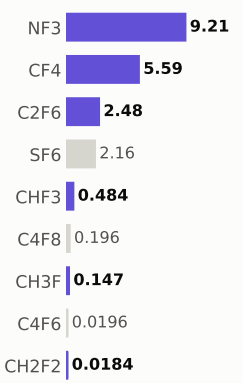

Step #9090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	937.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

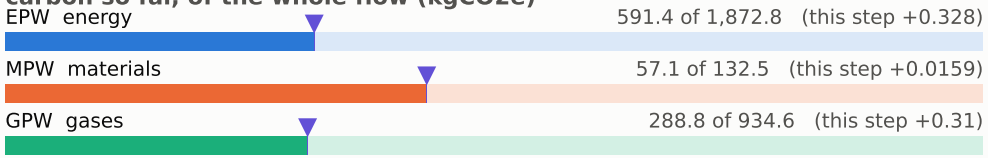

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

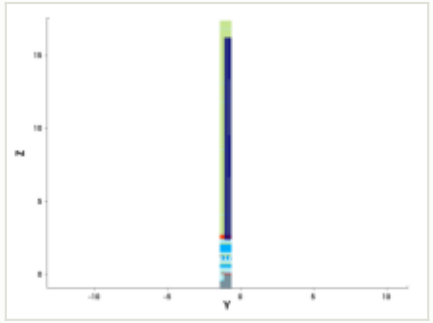

y cut at -1.035 µm

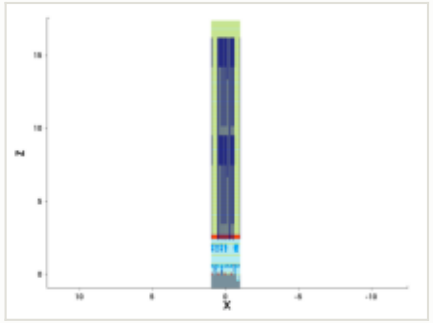

mask for this step

no mask for this step

steps by process area

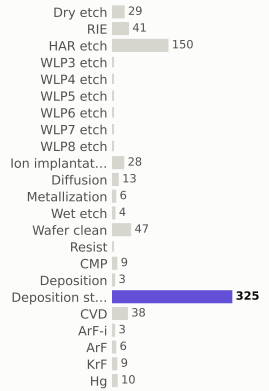

materials deposited (g)

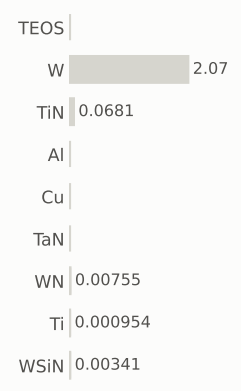

gases emitted (g)

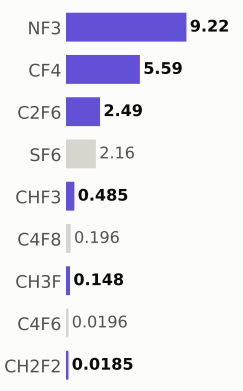

Step #9100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	938.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 591.7 of 1,872.8 (this step +0.328)

MPW materials — 57.1 of 132.5 (this step +0.0159)

GPW gases — 289.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

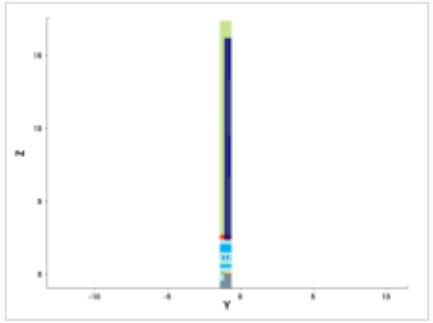

y cut at -1.035 µm

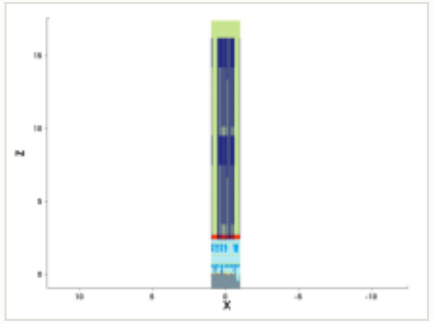

mask for this step

no mask for this step

steps by process area

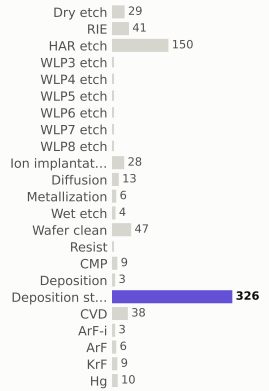

materials deposited (g)

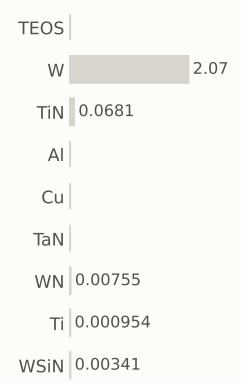

gases emitted (g)

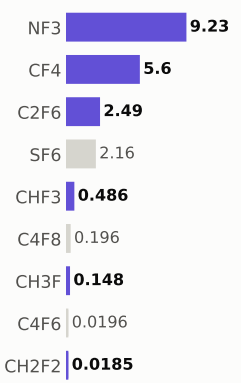

Step #9110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	938.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

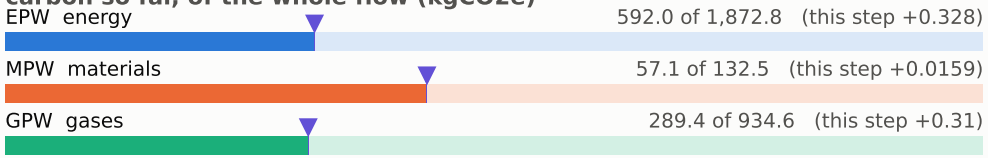

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

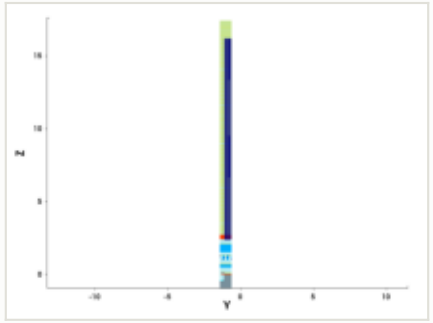

y cut at -1.035 µm

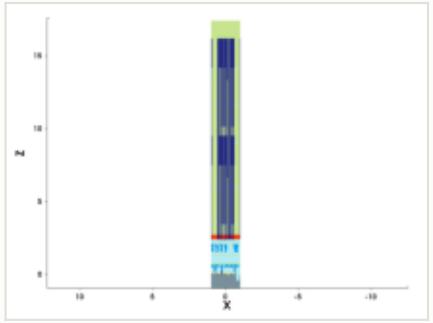

mask for this step

no mask for this step

steps by process area

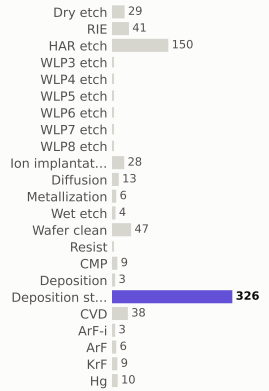

materials deposited (g)

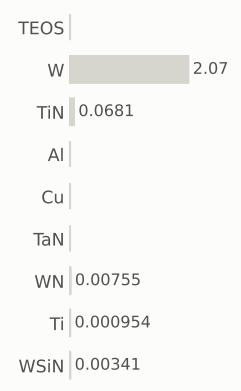

gases emitted (g)

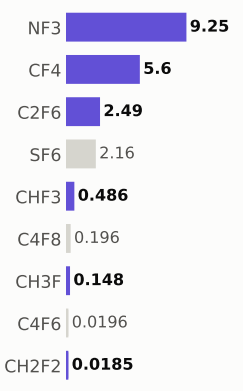

Step #9120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	939.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 592.4 of 1,872.8 (this step +0.328)

MPW materials — 57.1 of 132.5 (this step +0.0159)

GPW gases — 289.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

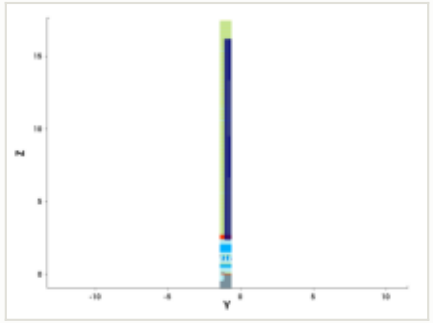

y cut at -1.035 µm

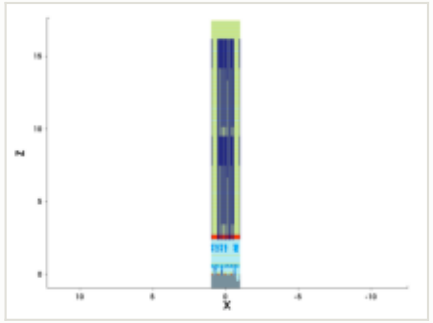

mask for this step

no mask for this step

steps by process area

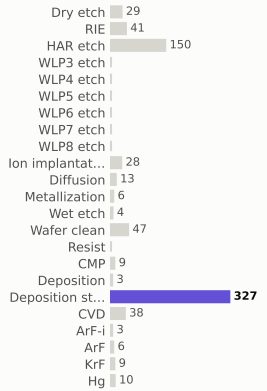

materials deposited (g)

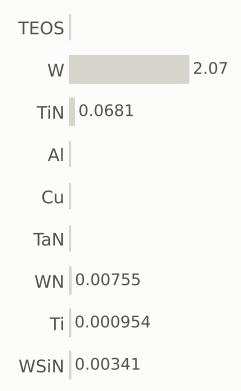

gases emitted (g)

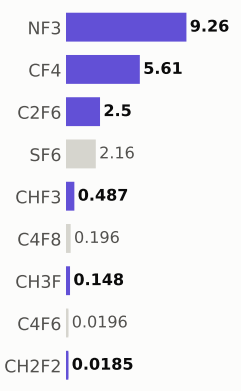

Step #9130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	939.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

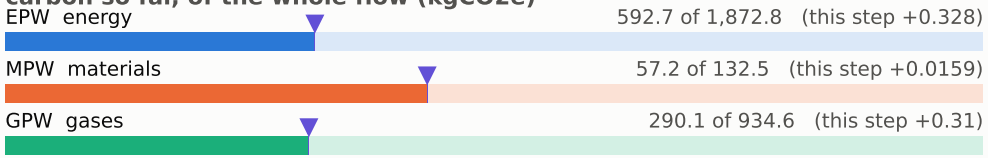

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

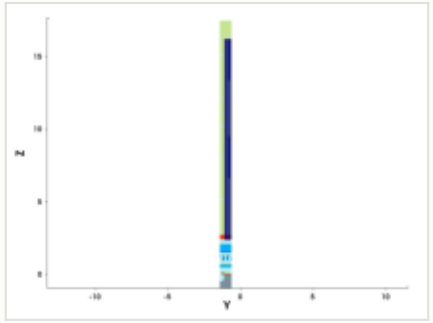

y cut at -1.035 µm

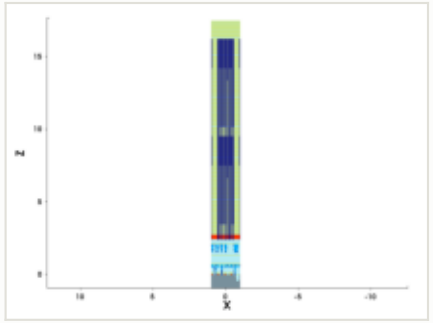

mask for this step

no mask for this step

steps by process area

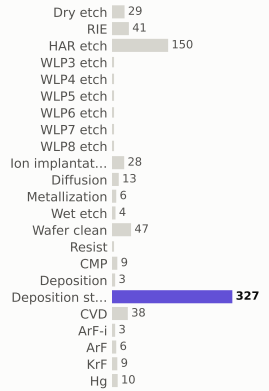

materials deposited (g)

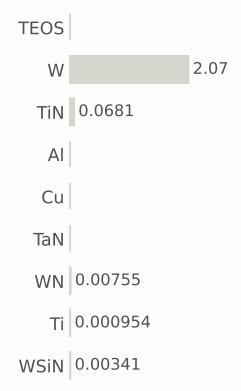

gases emitted (g)

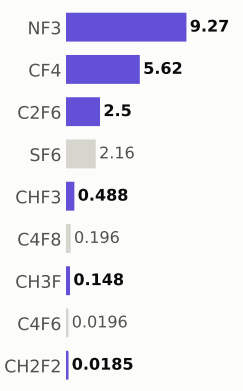

Step #9140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	940.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

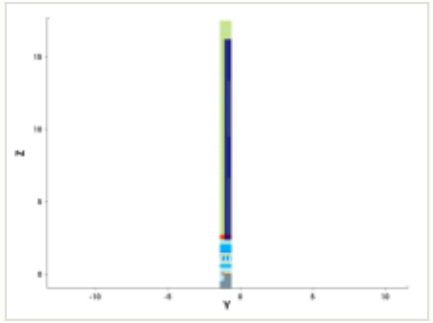

y cut at -1.035 µm

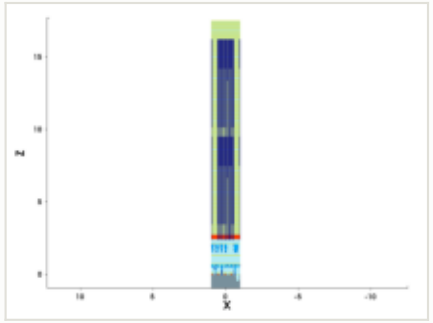

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 593.0 of 1,872.8 (this step +0.328)

MPW materials — 57.2 of 132.5 (this step +0.0159)

GPW gases — 290.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

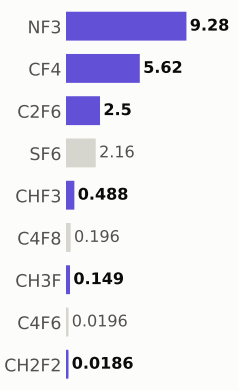

Step #9150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	941.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 593.4 of 1,872.8 (this step +0.328)

MPW materials — 57.2 of 132.5 (this step +0.0159)

GPW gases — 290.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

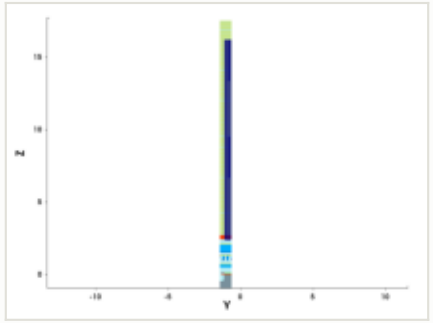

y cut at -1.035 µm

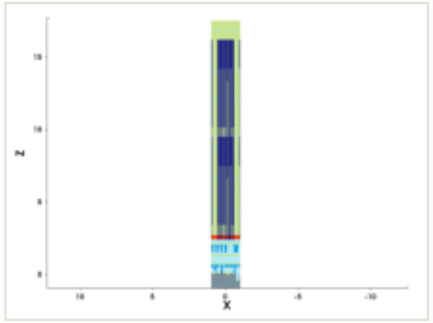

mask for this step

no mask for this step

steps by process area

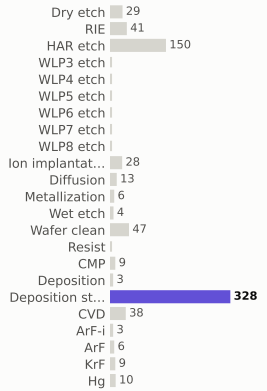

materials deposited (g)

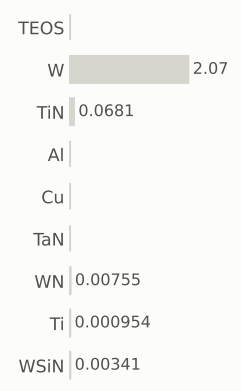

gases emitted (g)

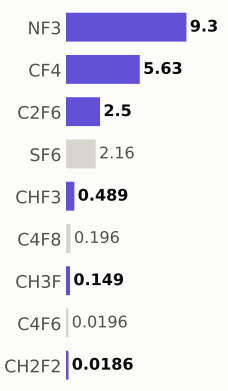

Step #9160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	941.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 593.7 of 1,872.8 (this step +0.328)

MPW materials — 57.2 of 132.5 (this step +0.0159)

GPW gases — 291.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

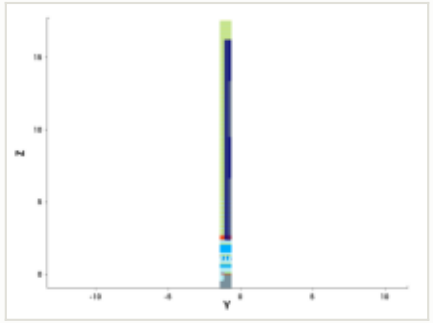

y cut at -1.035 µm

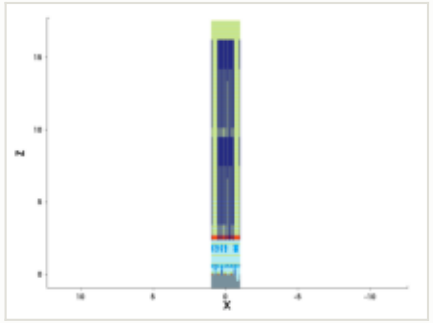

mask for this step

no mask for this step

steps by process area

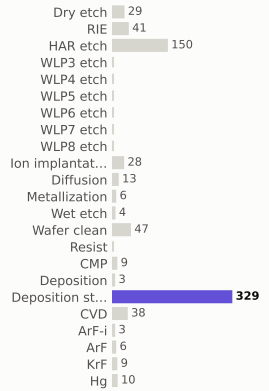

materials deposited (g)

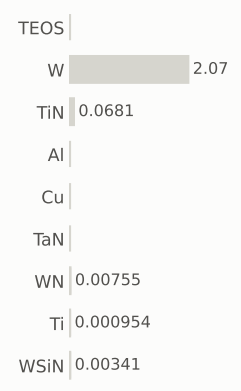

gases emitted (g)

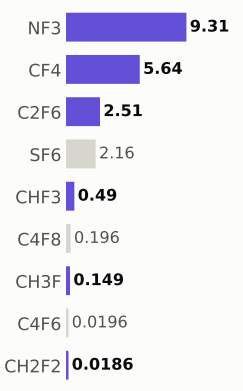

Step #9170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	942.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

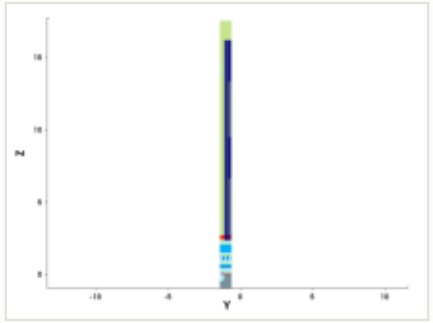

y cut at -1.035 µm

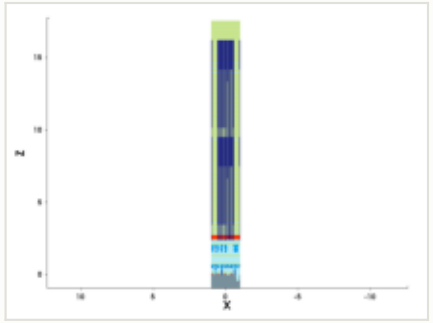

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 594.0 of 1,872.8 (this step +0.328)

MPW materials — 57.2 of 132.5 (this step +0.0159)

GPW gases — 291.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

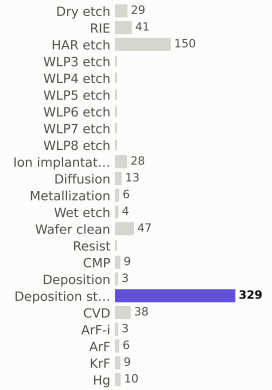

materials deposited (g)



gases emitted (g)

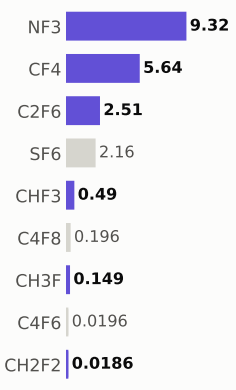

Step #9180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	943.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

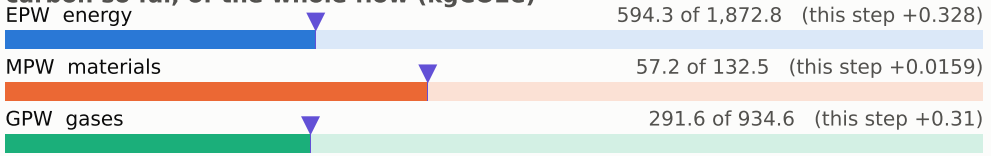

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

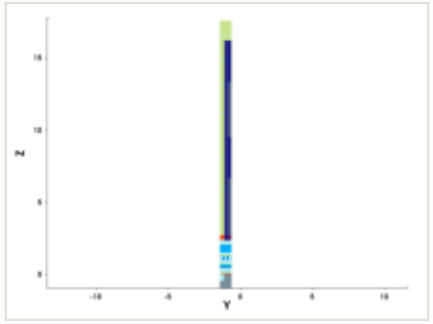

y cut at -1.035 µm

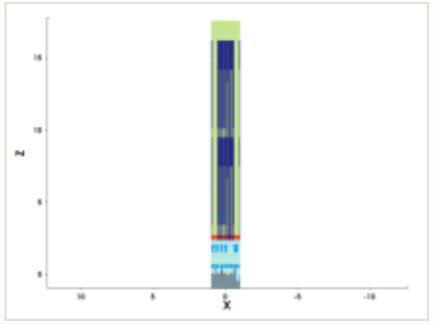

mask for this step

no mask for this step

steps by process area

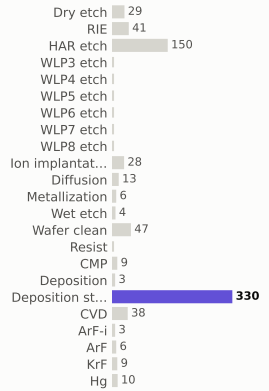

materials deposited (g)

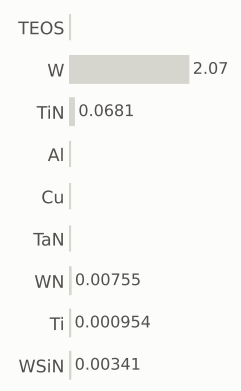

gases emitted (g)

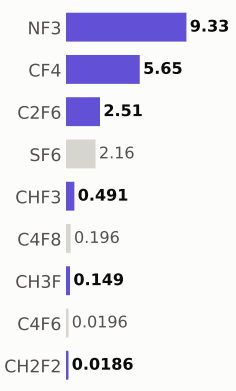

Step #9190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	943.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

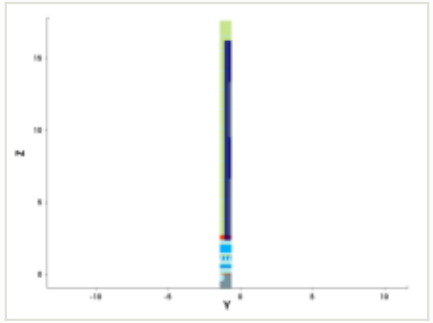

y cut at -1.035 µm

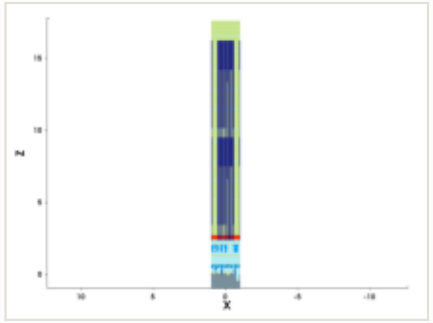

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 594.7 of 1,872.8 (this step +0.328)

MPW materials — 57.2 of 132.5 (this step +0.0159)

GPW gases — 291.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

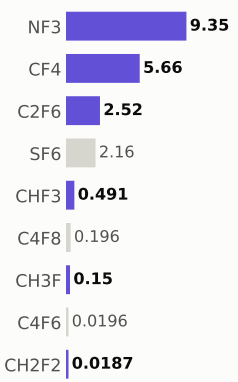

Step #9200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	944.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 595.0 of 1,872.8 (this step +0.328)

MPW materials — 57.3 of 132.5 (this step +0.0159)

GPW gases — 292.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

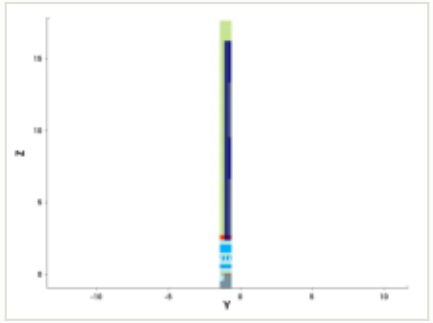

y cut at -1.035 µm

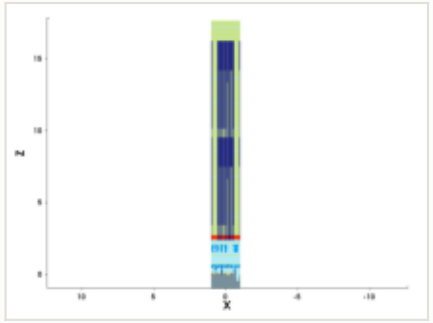

mask for this step

no mask for this step

steps by process area

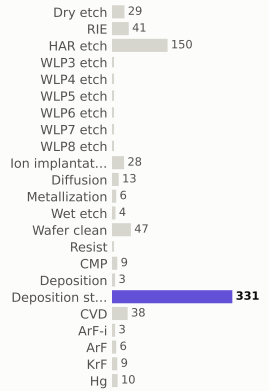

materials deposited (g)

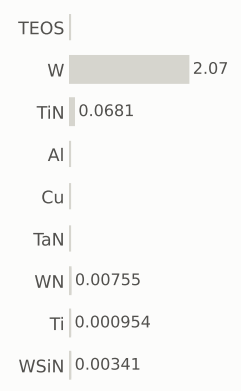

gases emitted (g)

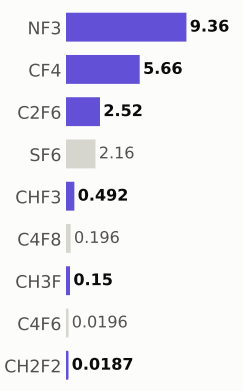

Step #9210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	945.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

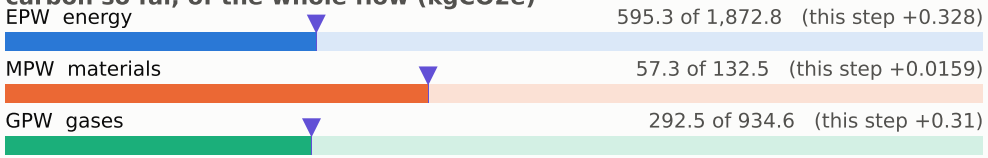

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

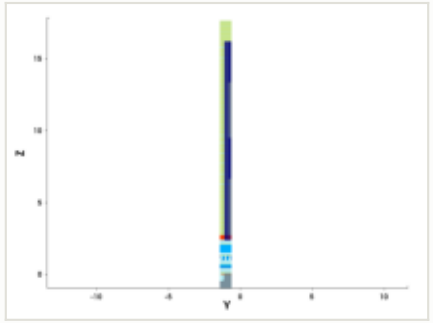

y cut at -1.035 µm

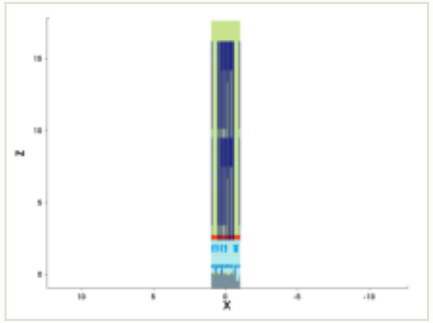

mask for this step

no mask for this step

steps by process area

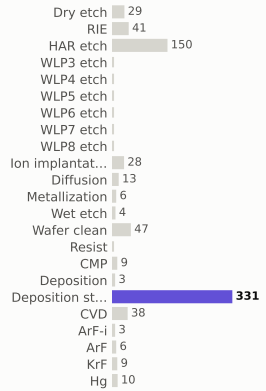

materials deposited (g)

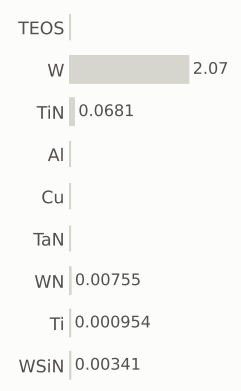

gases emitted (g)



Step #9220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	945.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 595.7 of 1,872.8 (this step +0.328)

MPW materials — 57.3 of 132.5 (this step +0.0159)

GPW gases — 292.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

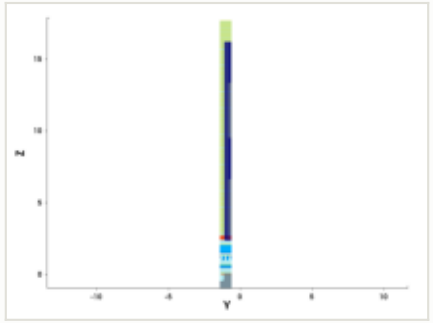

y cut at -1.035 µm

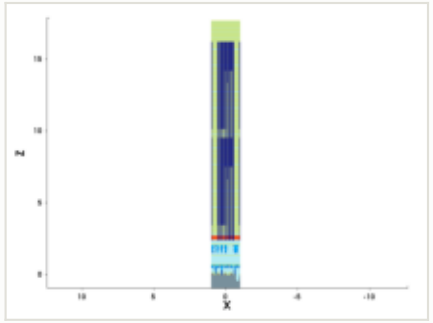

mask for this step

no mask for this step

steps by process area

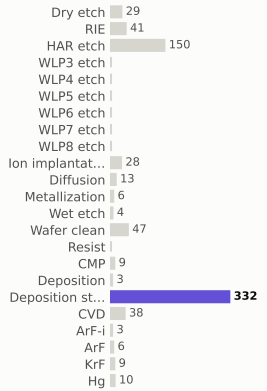

materials deposited (g)

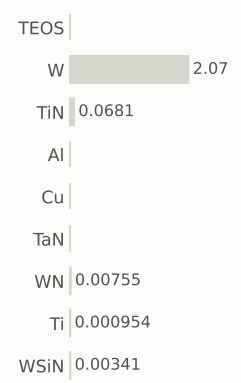

gases emitted (g)

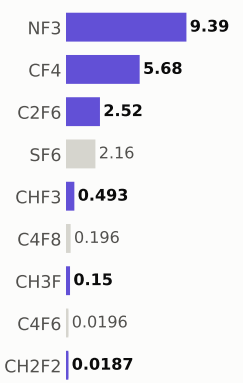

Step #9230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	946.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

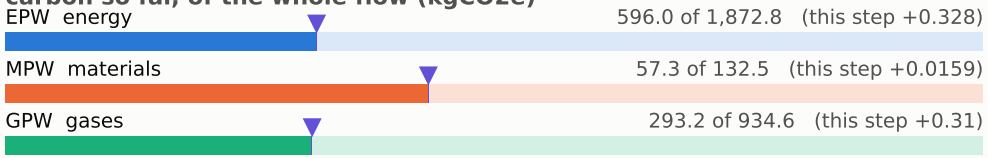

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

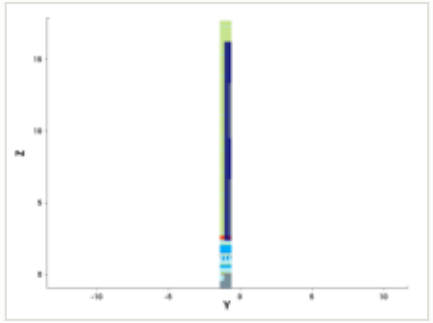

y cut at -1.035 µm

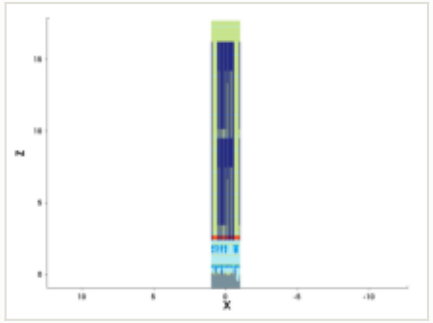

mask for this step

no mask for this step

steps by process area

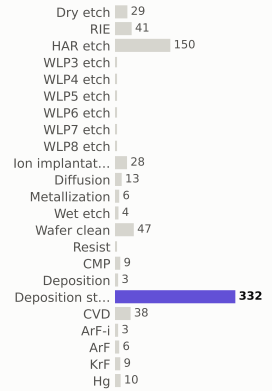

materials deposited (g)

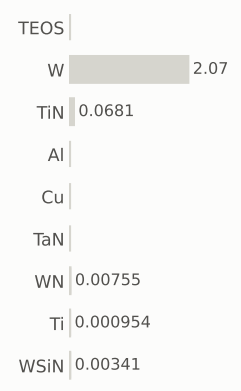

gases emitted (g)

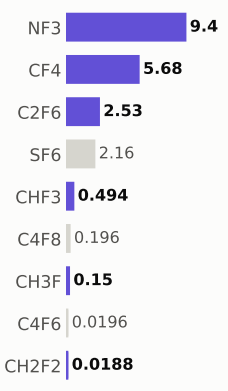

Step #9240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	947.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 596.3 of 1,872.8 (this step +0.328)

MPW materials — 57.3 of 132.5 (this step +0.0159)

GPW gases — 293.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

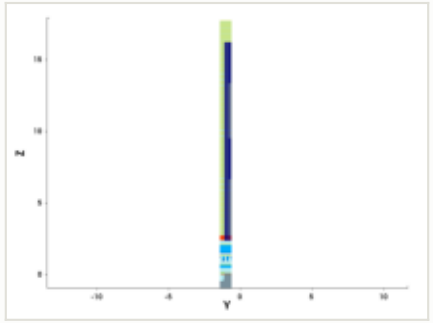

y cut at -1.035 µm

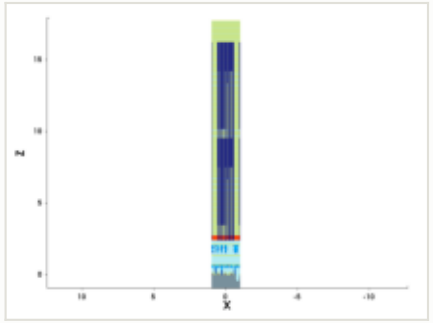

mask for this step

no mask for this step

steps by process area

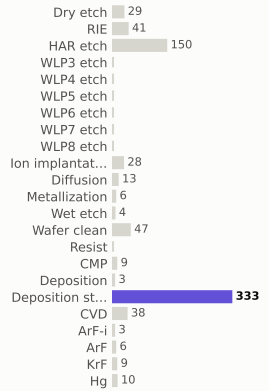

materials deposited (g)

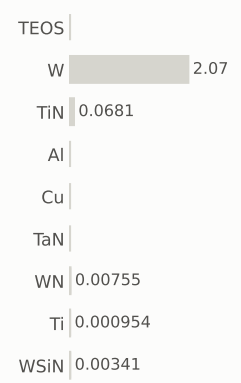

gases emitted (g)

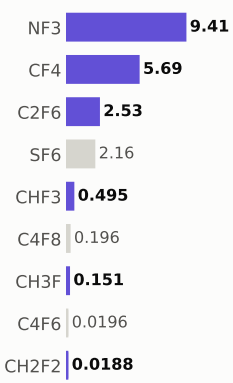

Step #9250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	947.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

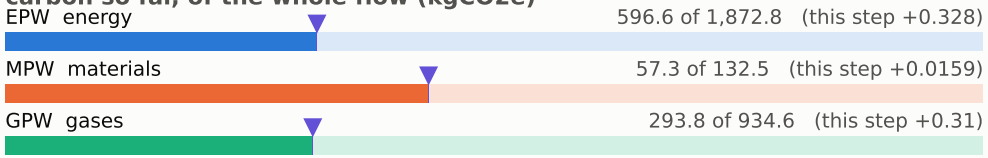

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

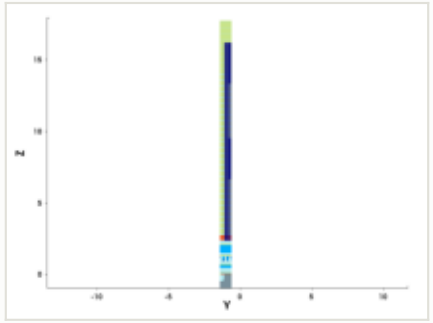

y cut at -1.035 µm

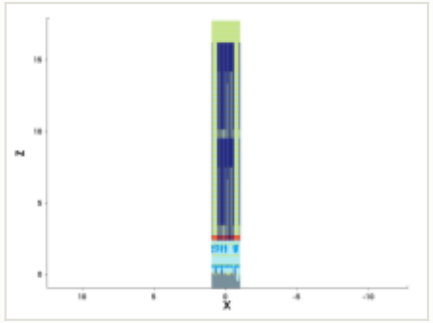

mask for this step

no mask for this step

steps by process area

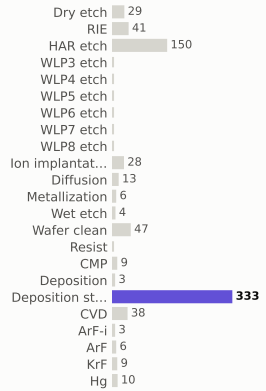

materials deposited (g)

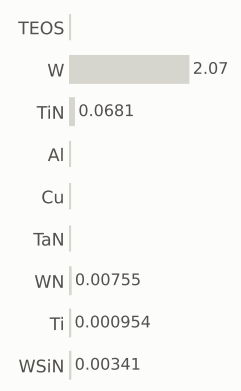

gases emitted (g)

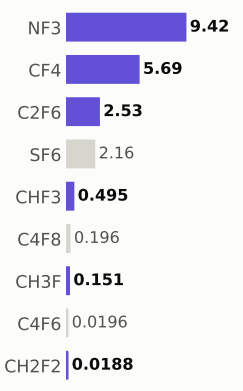

Step #9260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	948.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

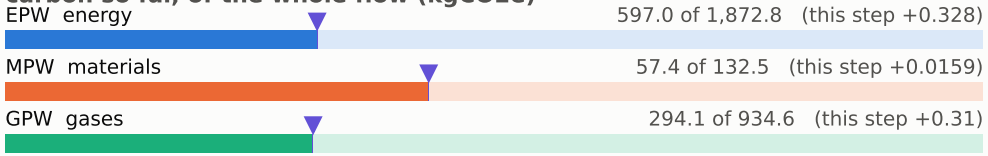

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

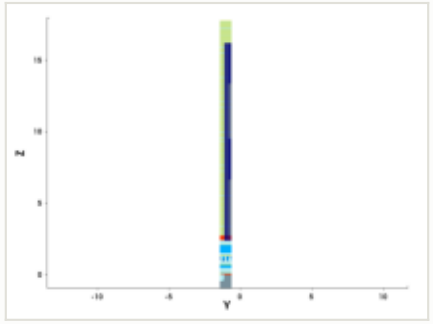

y cut at -1.035 µm

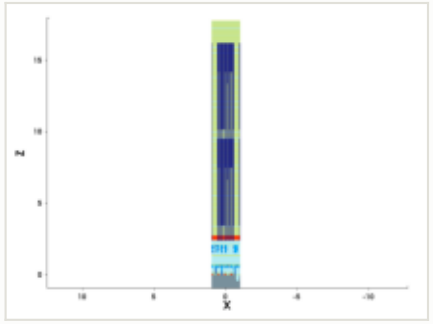

mask for this step

no mask for this step

steps by process area

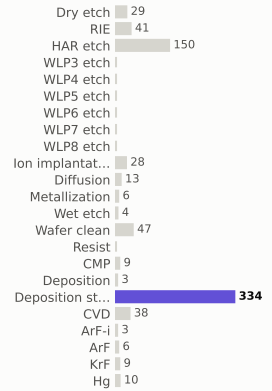

materials deposited (g)

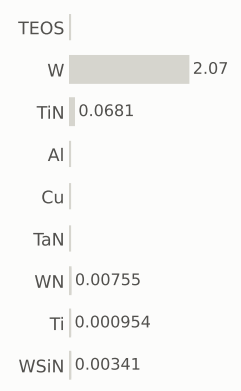

gases emitted (g)

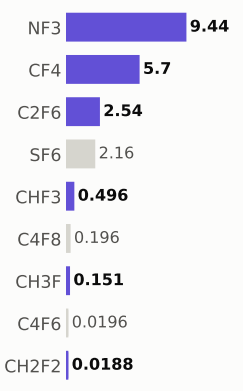

Step #9270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	949.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

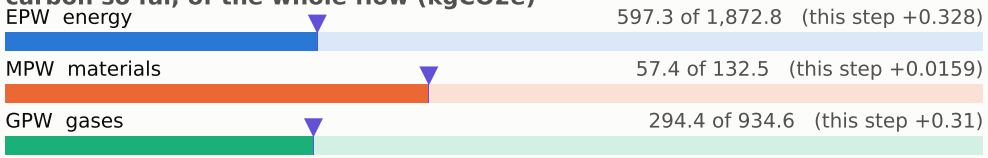

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

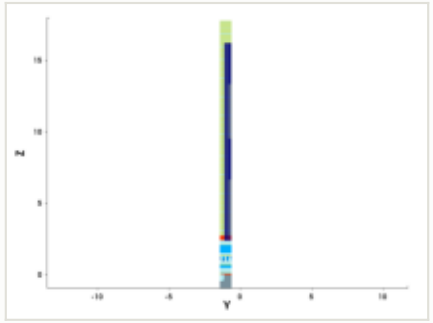

y cut at -1.035 µm

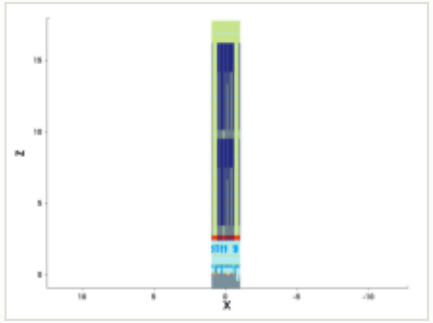

mask for this step

no mask for this step

steps by process area

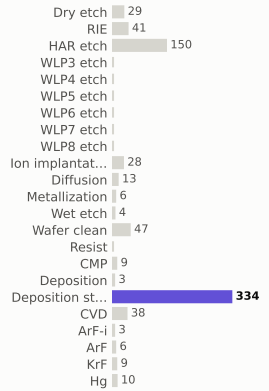

materials deposited (g)

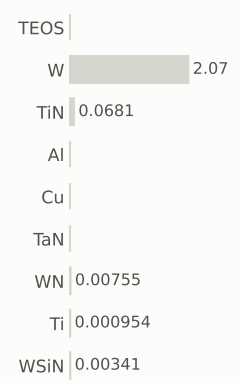

gases emitted (g)

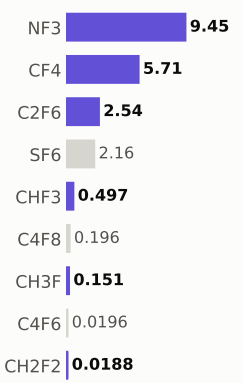

Step #9280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	949.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

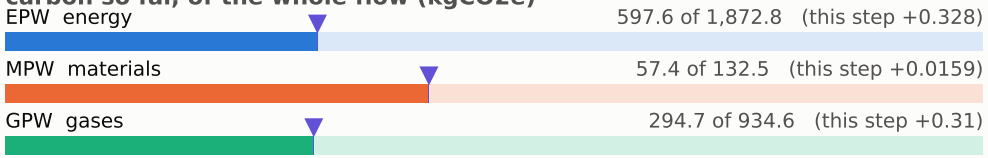

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

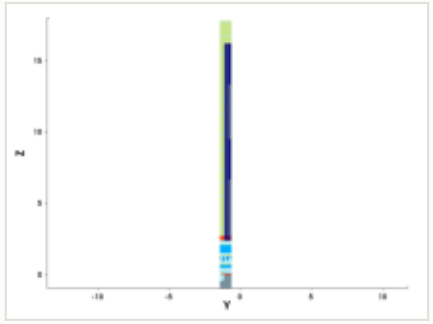

y cut at -1.035 µm

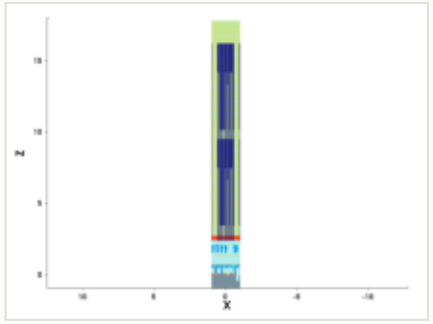

mask for this step

no mask for this step

steps by process area

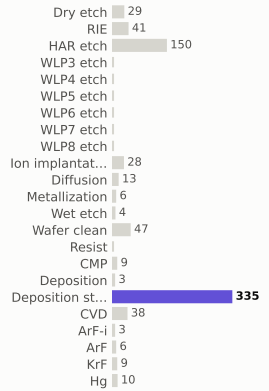

materials deposited (g)

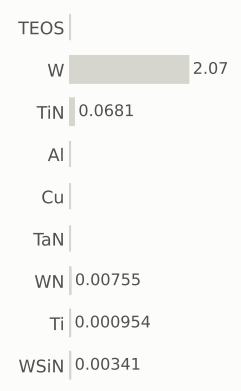

gases emitted (g)

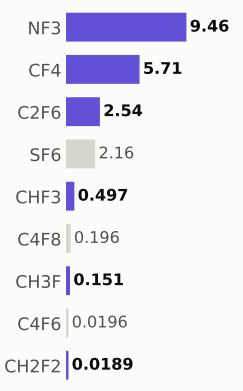

Step #9290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	950.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

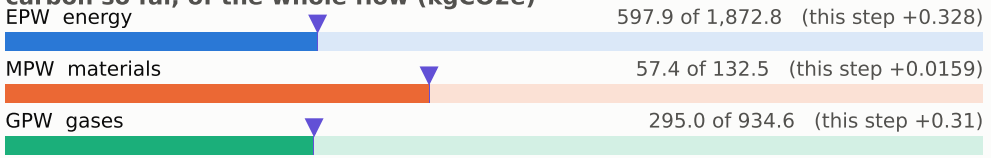

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

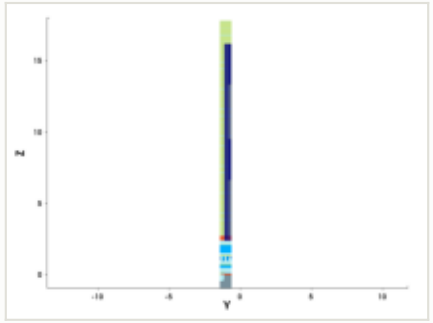

y cut at -1.035 µm

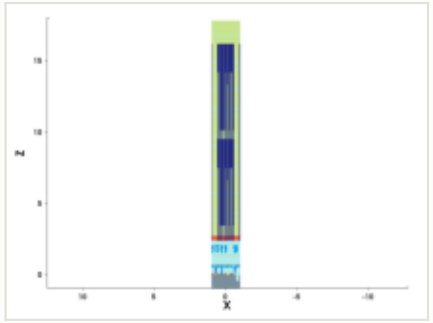

mask for this step

no mask for this step

steps by process area

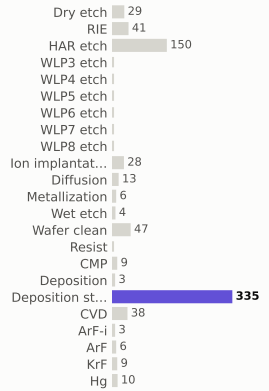

materials deposited (g)

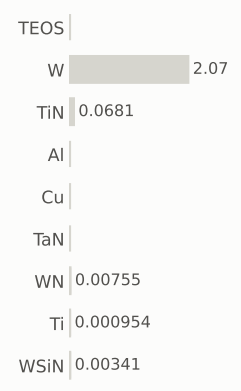

gases emitted (g)

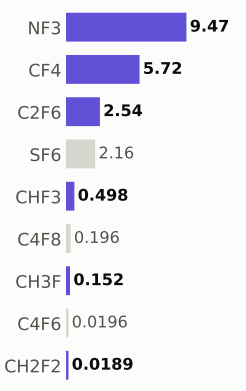

Step #9300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	951.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 598.3 of 1,872.8 (this step +0.328)

MPW materials — 57.4 of 132.5 (this step +0.0159)

GPW gases — 295.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

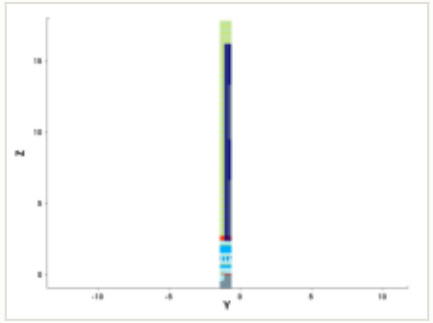

y cut at -1.035 µm

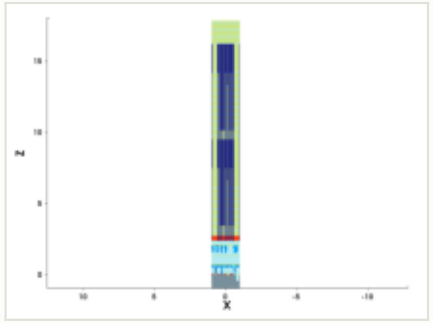

mask for this step

no mask for this step

steps by process area

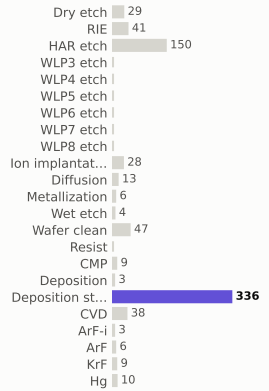

materials deposited (g)

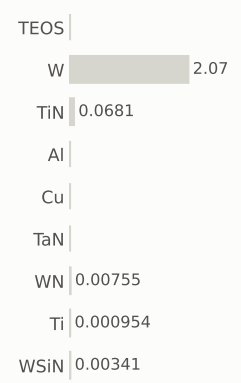

gases emitted (g)

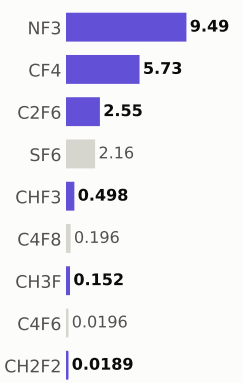

Step #9310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	951.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

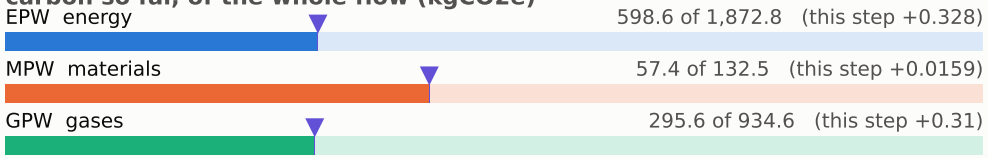

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

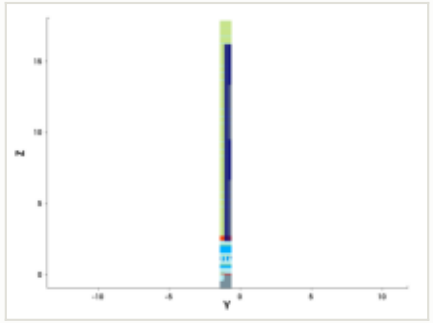

y cut at -1.035 µm

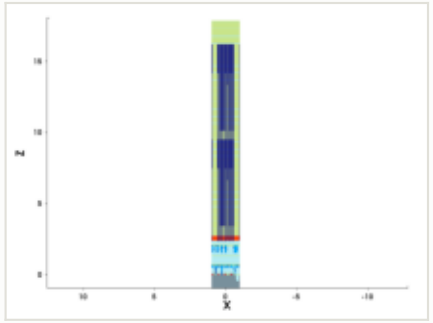

mask for this step

no mask for this step

steps by process area

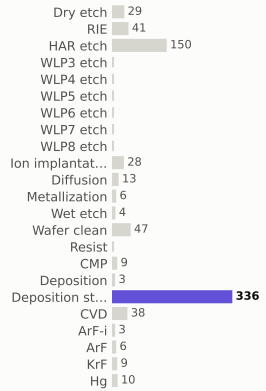

materials deposited (g)

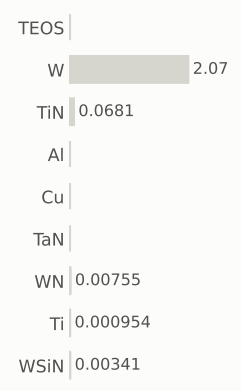

gases emitted (g)

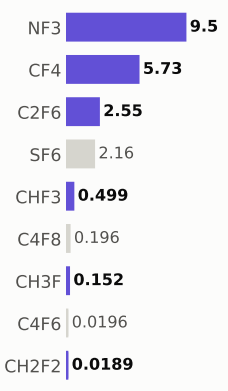

Step #9320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	952.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

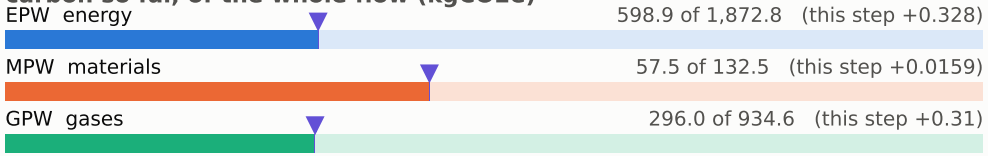

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

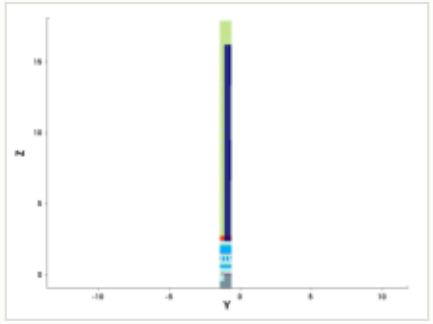

y cut at -1.035 µm

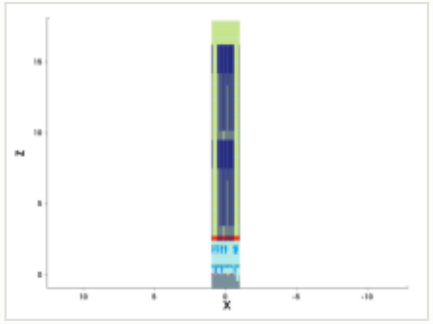

mask for this step

no mask for this step

steps by process area

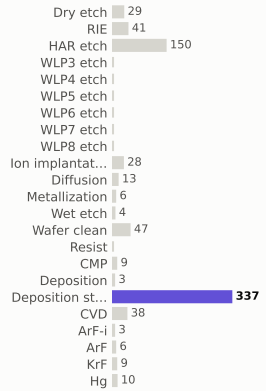

materials deposited (g)

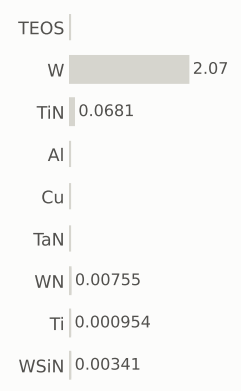

gases emitted (g)

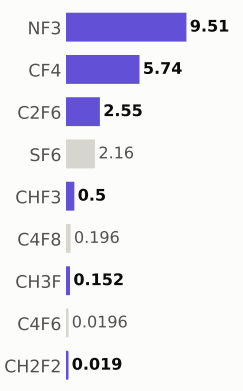

Step #9330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	953.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

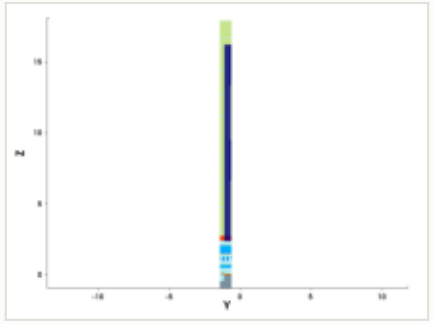

y cut at -1.035 µm

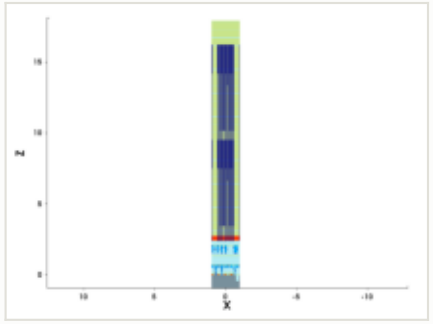

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 599.3 of 1,872.8 (this step +0.328)

MPW materials — 57.5 of 132.5 (this step +0.0159)

GPW gases — 296.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

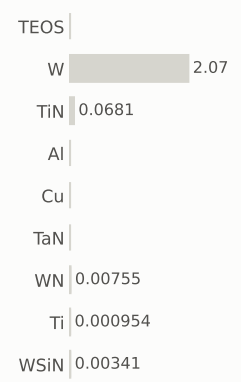

gases emitted (g)



Step #9340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	953.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 599.6 of 1,872.8 (this step +0.328)

MPW materials — 57.5 of 132.5 (this step +0.0159)

GPW gases — 296.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

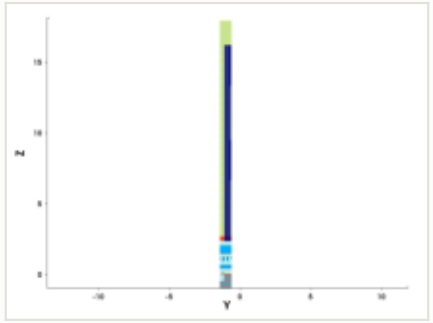

y cut at -1.035 µm

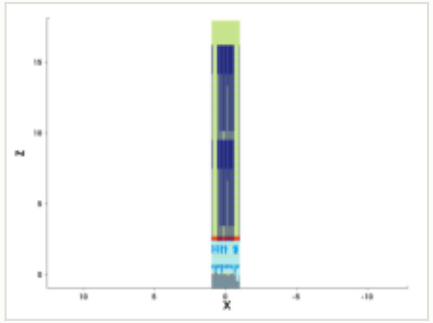

mask for this step

no mask for this step

steps by process area

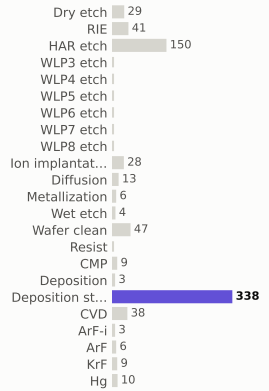

materials deposited (g)

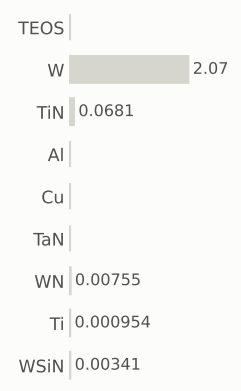

gases emitted (g)

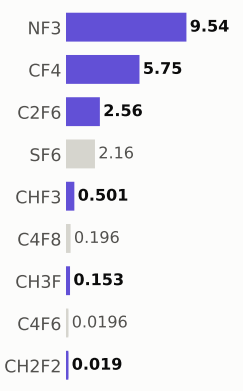

Step #9350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	954.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

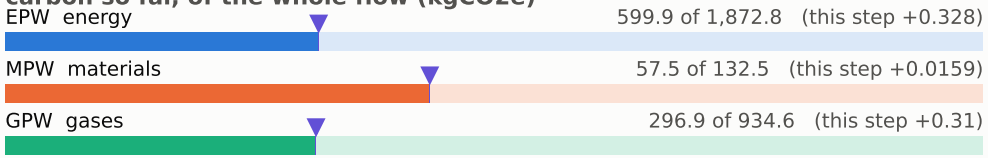

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

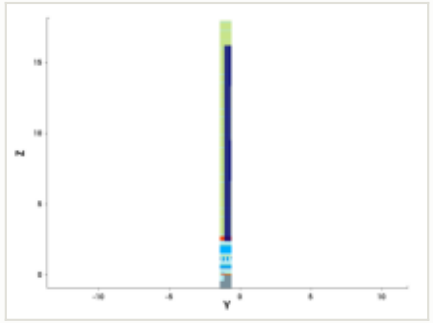

y cut at -1.035 µm

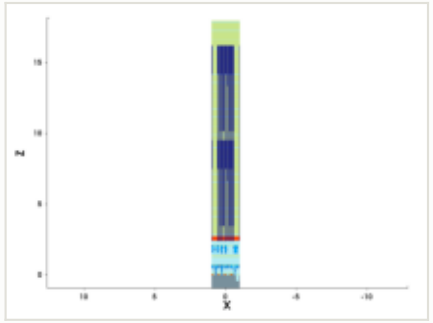

mask for this step

no mask for this step

steps by process area

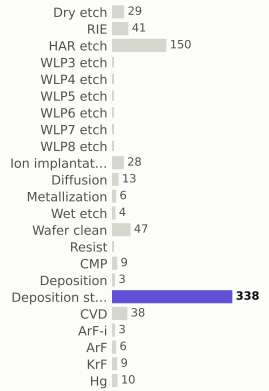

materials deposited (g)

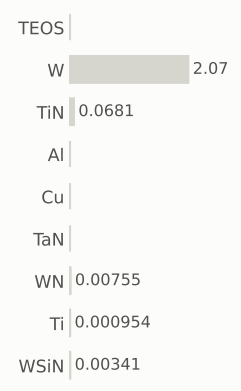

gases emitted (g)

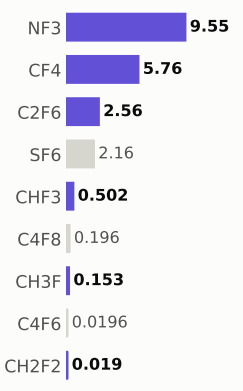

Step #9360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	955.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

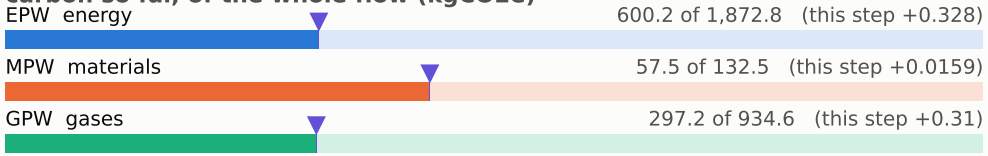

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

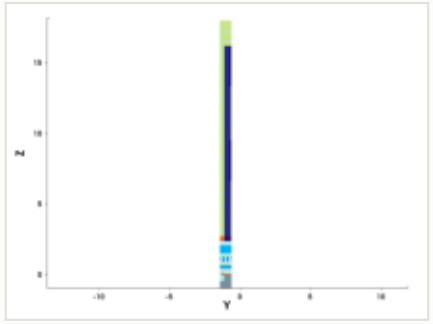

y cut at -1.035 µm

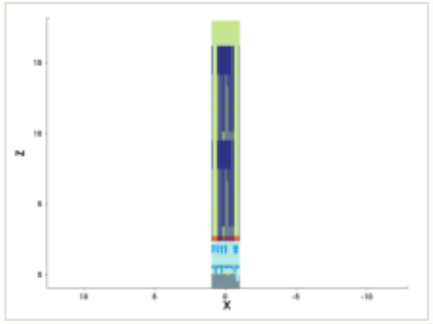

mask for this step

no mask for this step

steps by process area

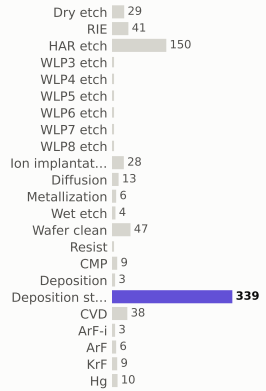

materials deposited (g)

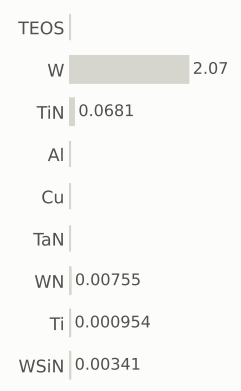

gases emitted (g)

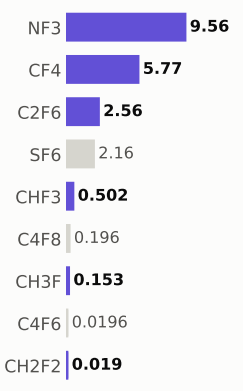

Step #9370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	955.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 600.6 of 1,872.8 (this step +0.328)

MPW materials — 57.5 of 132.5 (this step +0.0159)

GPW gases — 297.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

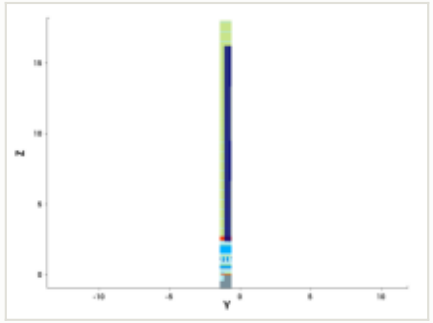

y cut at -1.035 µm

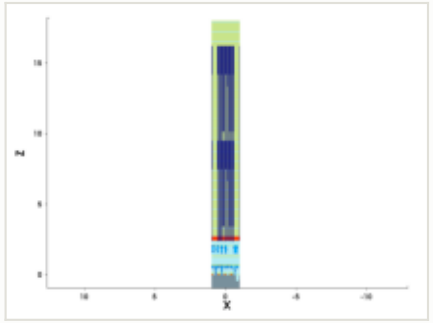

mask for this step

no mask for this step

steps by process area

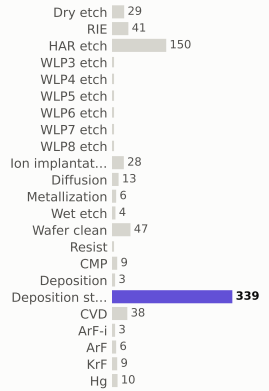

materials deposited (g)

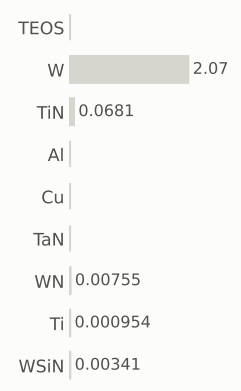

gases emitted (g)

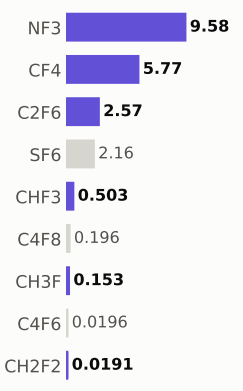

Step #9380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	956.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

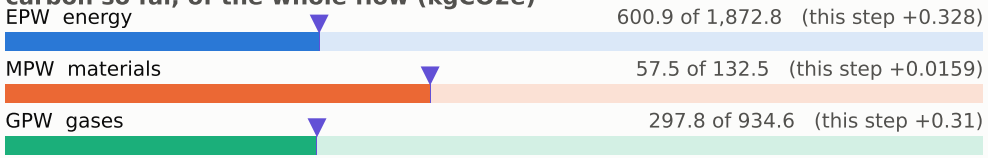

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

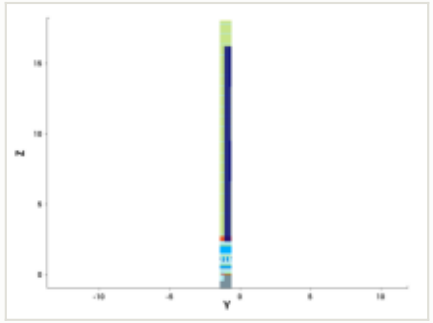

y cut at -1.035 µm

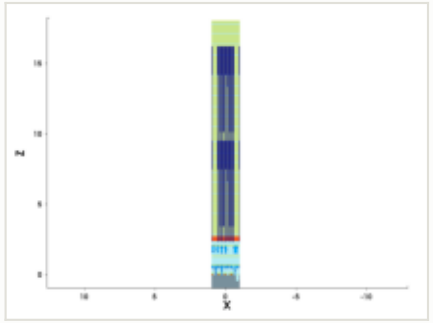

mask for this step

no mask for this step

steps by process area

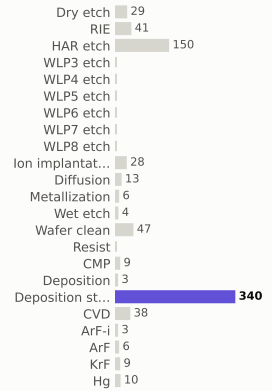

materials deposited (g)

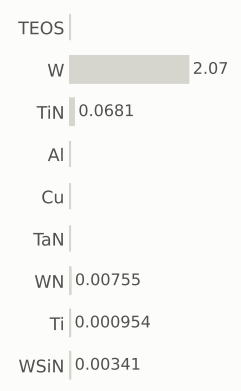

gases emitted (g)

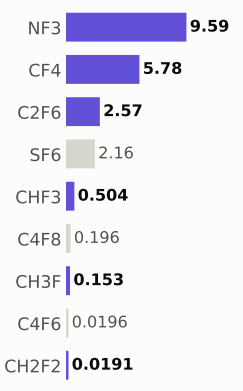

Step #9390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	956.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

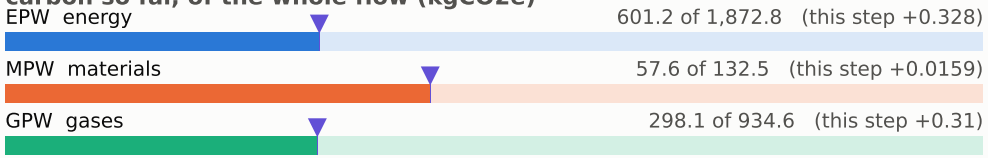

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

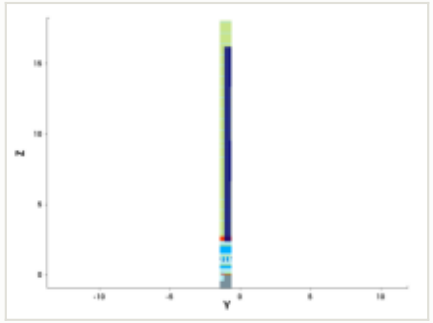

y cut at -1.035 µm

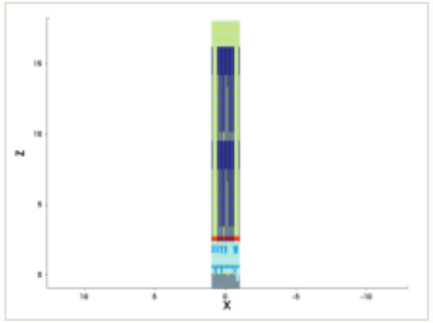

mask for this step

no mask for this step

steps by process area

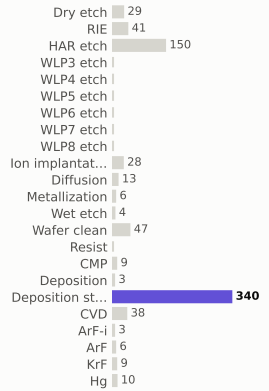

materials deposited (g)

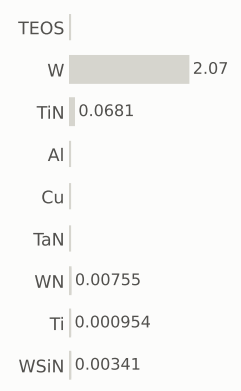

gases emitted (g)

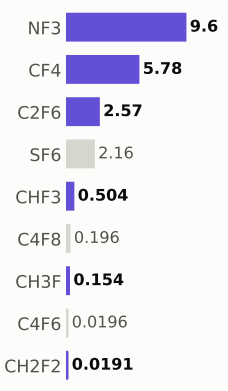

Step #9400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	957.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

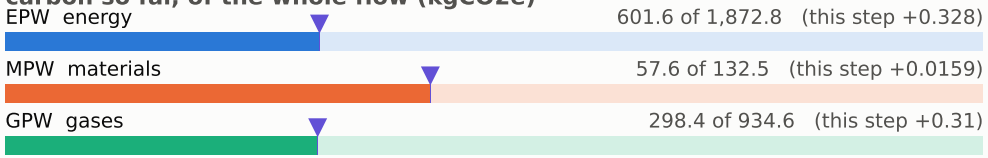

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

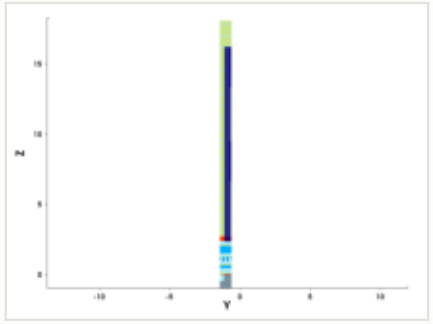

y cut at -1.035 µm

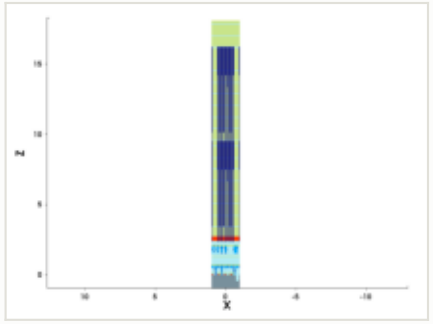

mask for this step

no mask for this step

steps by process area

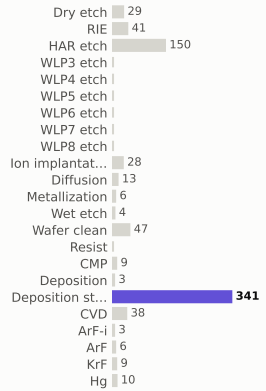

materials deposited (g)

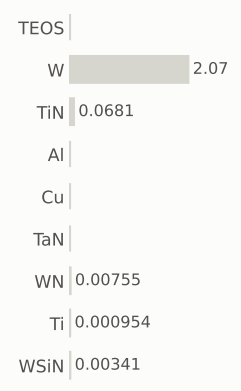

gases emitted (g)

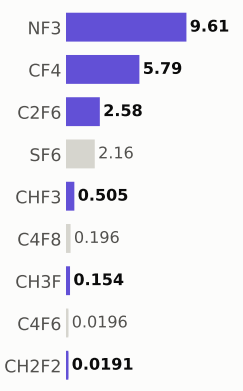

Step #9410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	958.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

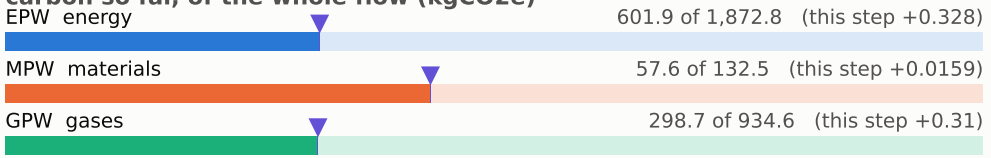

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

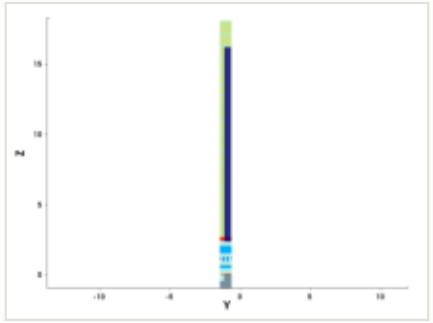

y cut at -1.035 µm

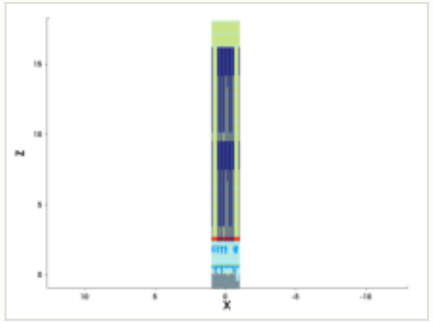

mask for this step

no mask for this step

steps by process area

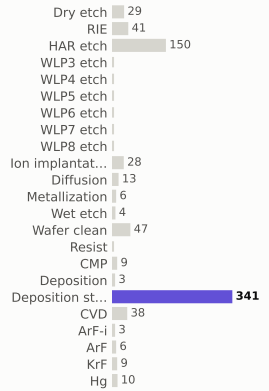

materials deposited (g)

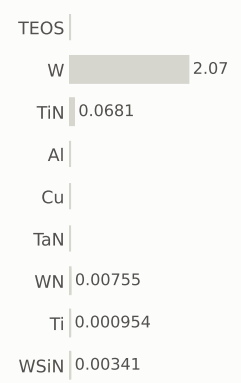

gases emitted (g)

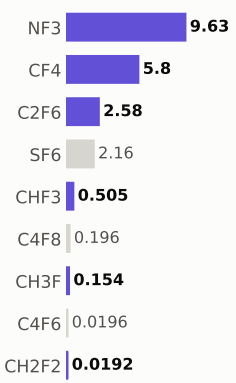

Step #9420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	958.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 602.2 of 1,872.8 (this step +0.328)

MPW materials — 57.6 of 132.5 (this step +0.0159)

GPW gases — 299.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

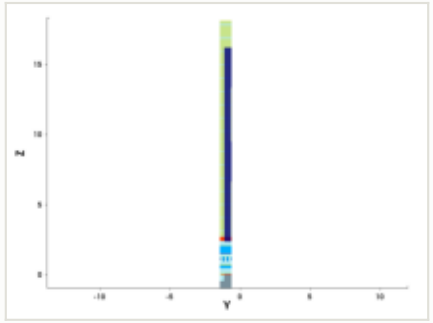

y cut at -1.035 µm

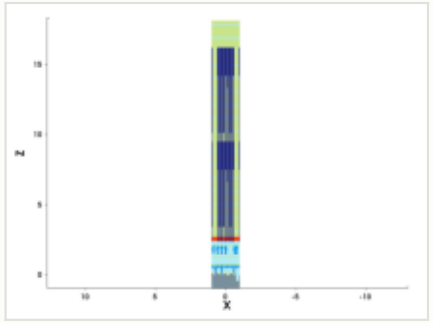

mask for this step

no mask for this step

steps by process area

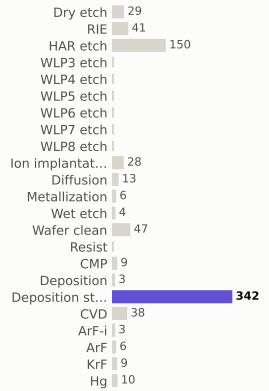

materials deposited (g)

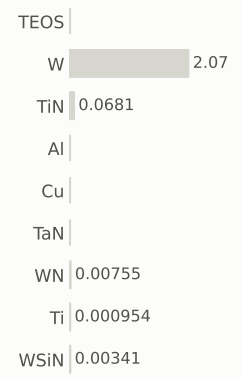

gases emitted (g)

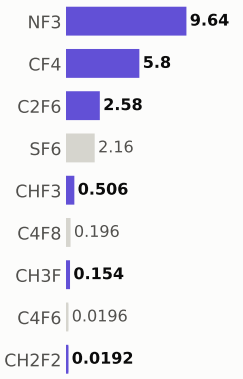

Step #9430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	959.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

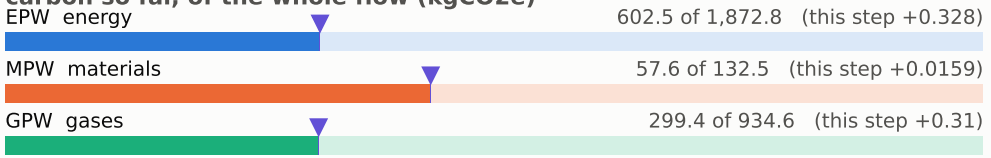

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

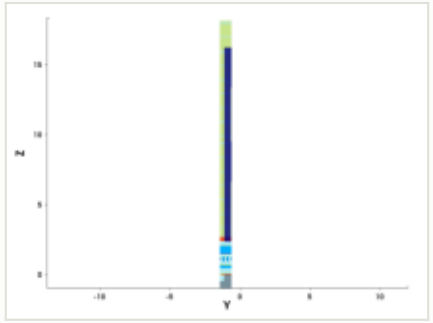

y cut at -1.035 µm

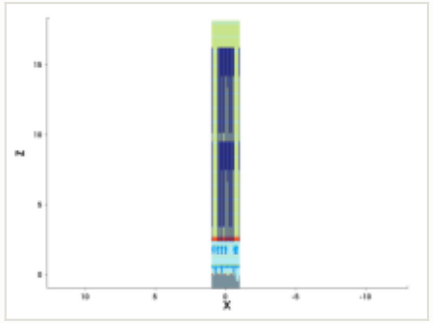

mask for this step

no mask for this step

steps by process area

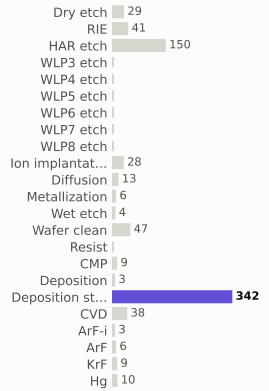

materials deposited (g)

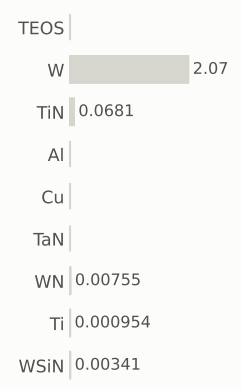

gases emitted (g)

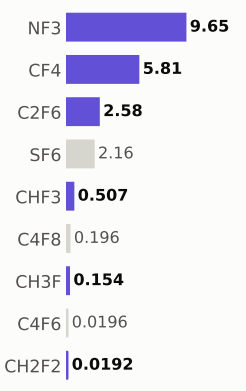

Step #9440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	960.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

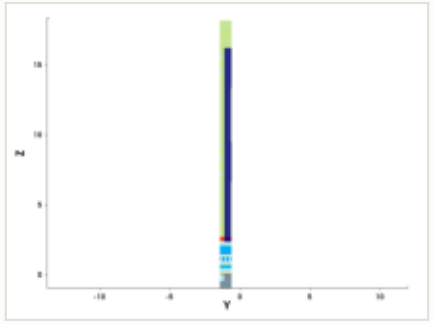

y cut at -1.035 µm

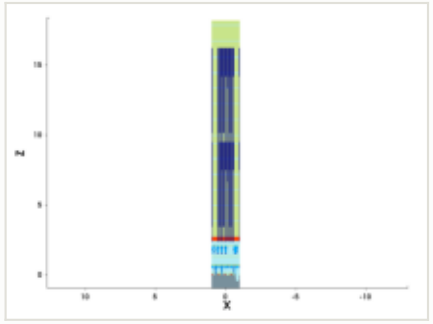

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 602.9 of 1,872.8 (this step +0.328)

MPW materials — 57.6 of 132.5 (this step +0.0159)

GPW gases — 299.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

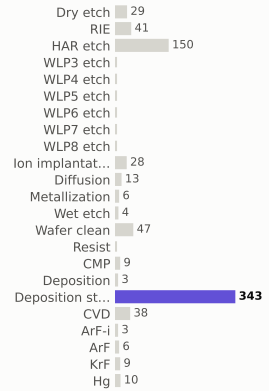

materials deposited (g)

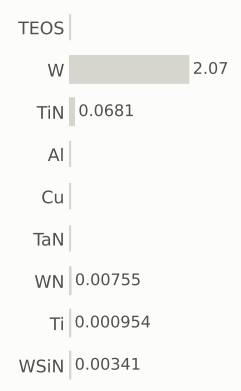

gases emitted (g)

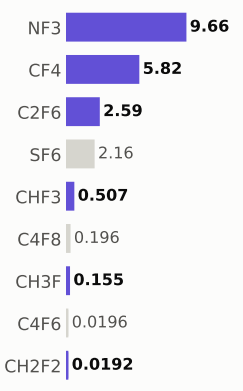

Step #9450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	960.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

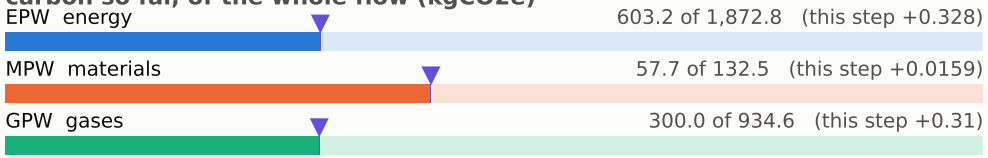

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

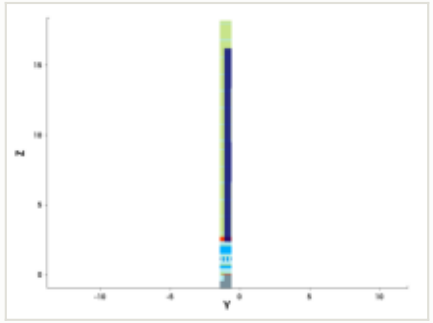

y cut at -1.035 µm

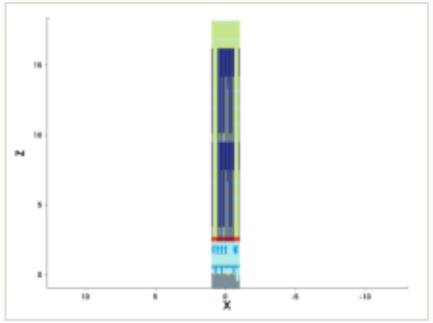

mask for this step

no mask for this step

steps by process area

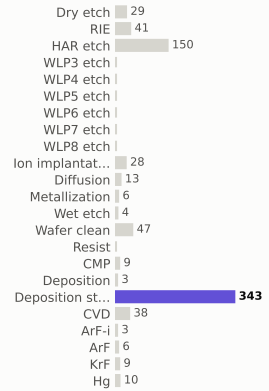

materials deposited (g)

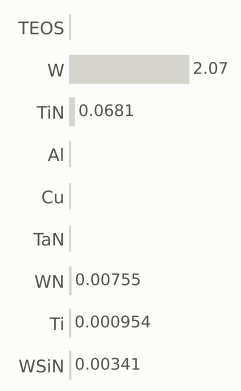

gases emitted (g)

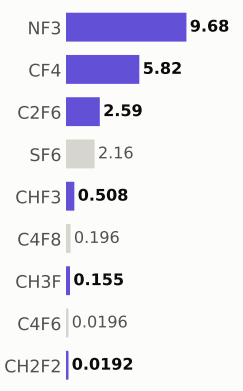

Step #9460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	961.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

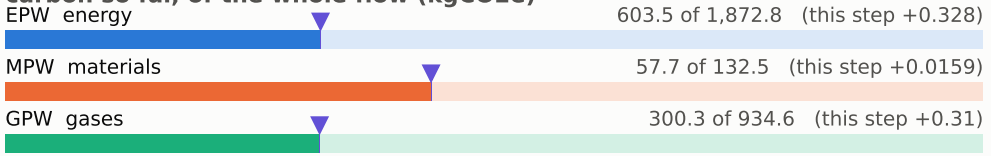

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

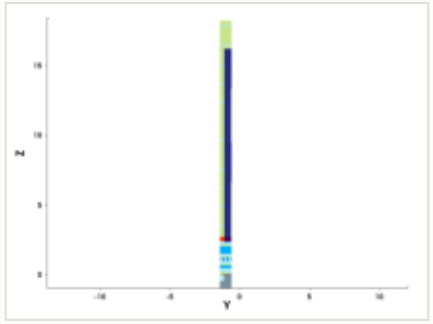

y cut at -1.035 µm

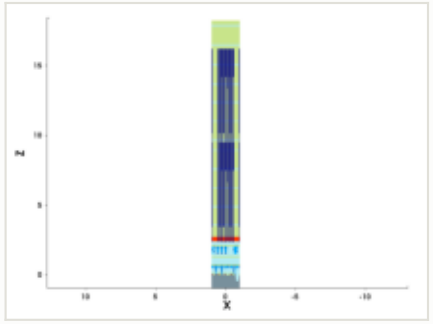

mask for this step

no mask for this step

steps by process area

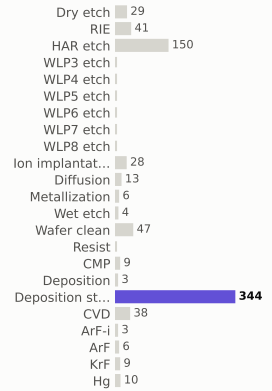

materials deposited (g)

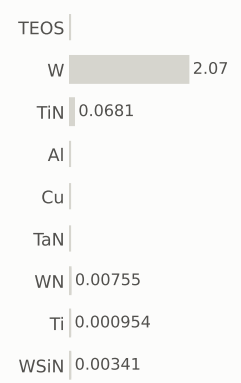

gases emitted (g)

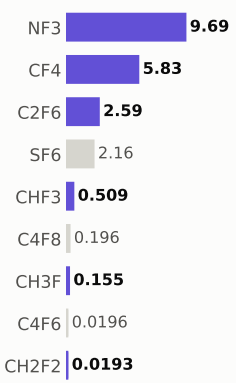

Step #9470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	962.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

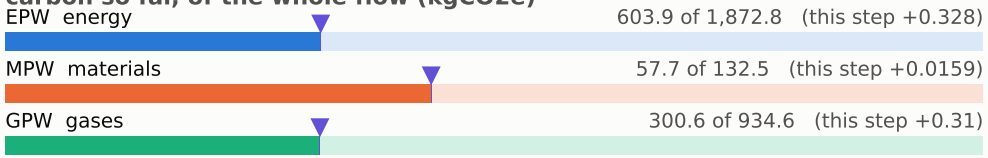

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

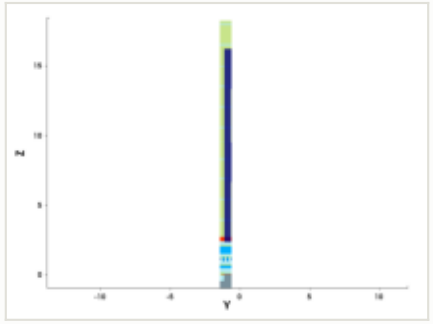

y cut at -1.035 µm

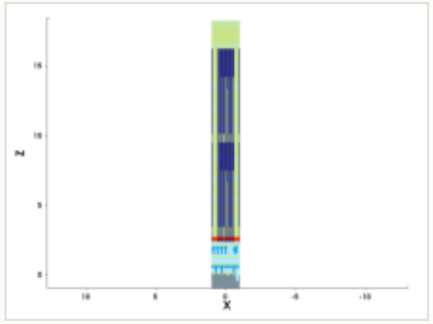

mask for this step

no mask for this step

steps by process area

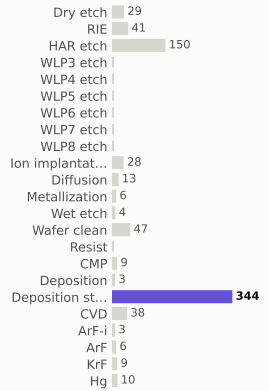

materials deposited (g)

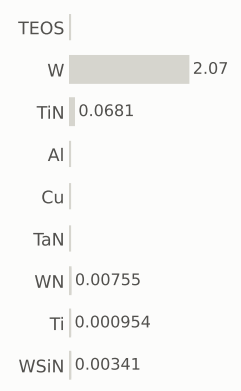

gases emitted (g)

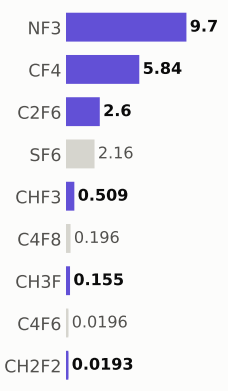

Step #9480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	962.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

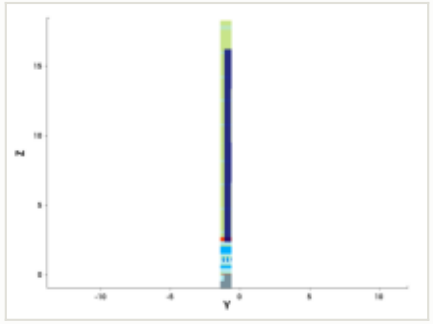

y cut at -1.035 µm

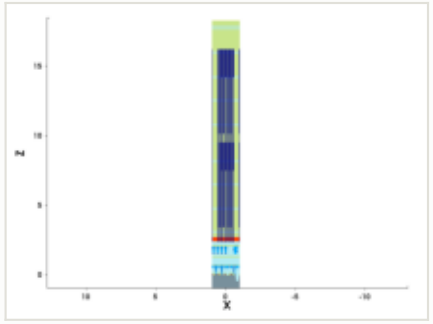

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

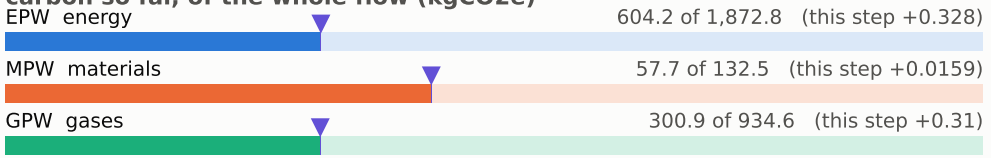

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

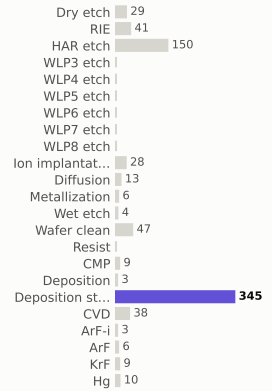

materials deposited (g)

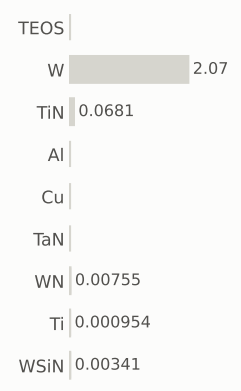

gases emitted (g)

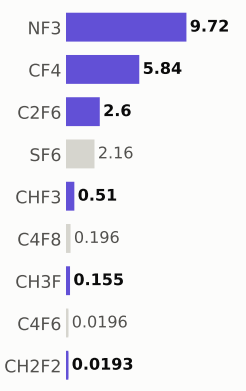

Step #9490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	963.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 604.5 of 1,872.8 (this step +0.328)

MPW materials — 57.7 of 132.5 (this step +0.0159)

GPW gases — 301.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

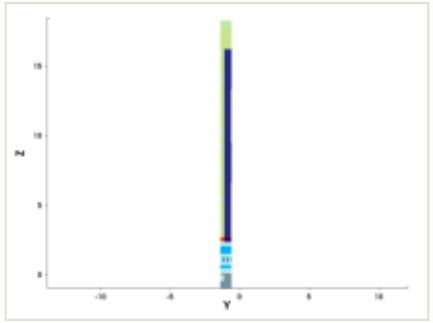

y cut at -1.035 µm

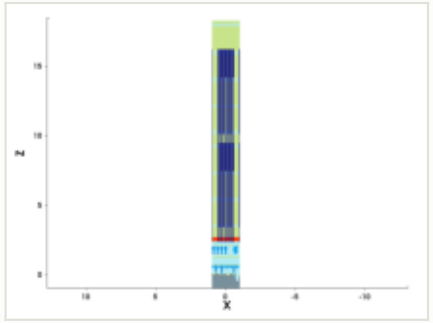

mask for this step

no mask for this step

steps by process area

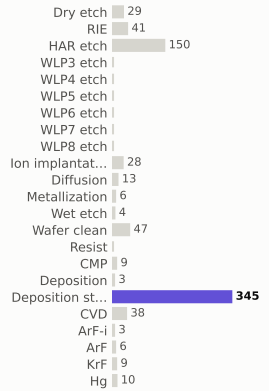

materials deposited (g)

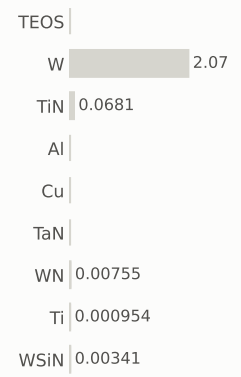

gases emitted (g)

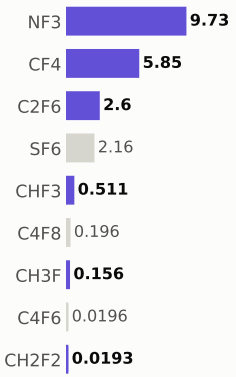

Step #9500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	964.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 604.8 of 1,872.8 (this step +0.328)

MPW materials — 57.7 of 132.5 (this step +0.0159)

GPW gases — 301.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

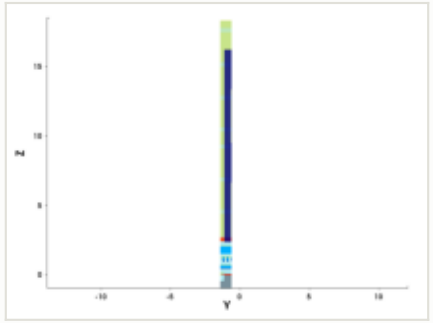

y cut at -1.035 µm

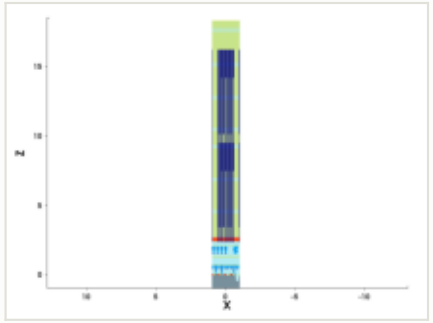

mask for this step

no mask for this step

steps by process area

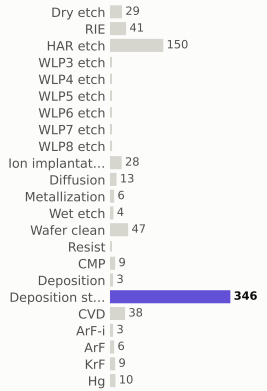

materials deposited (g)

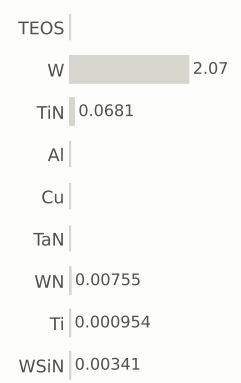

gases emitted (g)

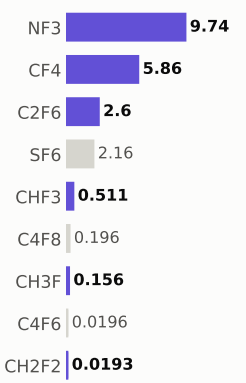

Step #9510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	964.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

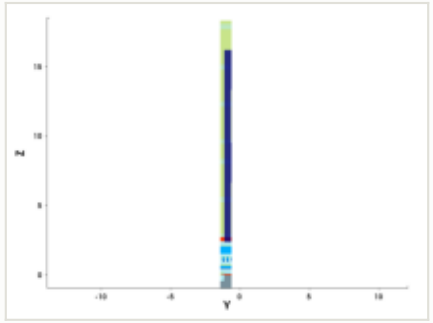

y cut at -1.035 µm

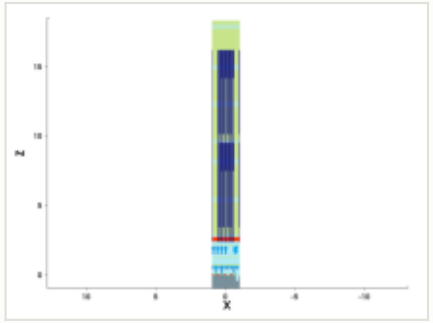

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 605.2 of 1,872.8 (this step +0.328)

MPW materials — 57.8 of 132.5 (this step +0.0159)

GPW gases — 301.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

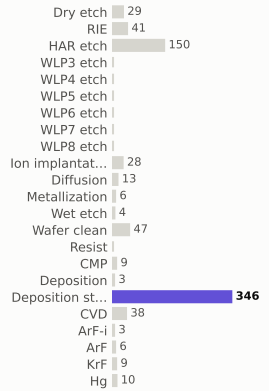

materials deposited (g)

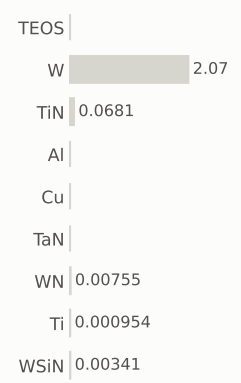

gases emitted (g)

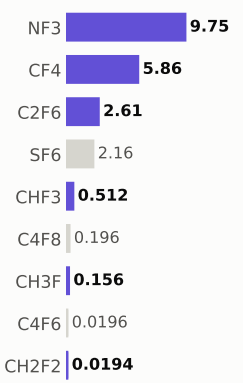

Step #9520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	965.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

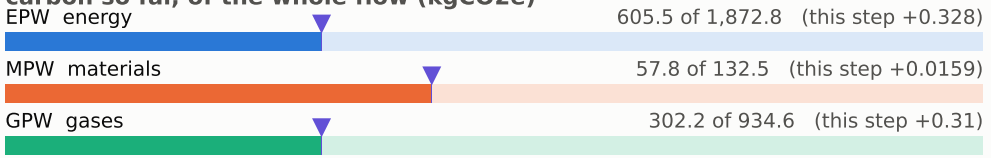

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

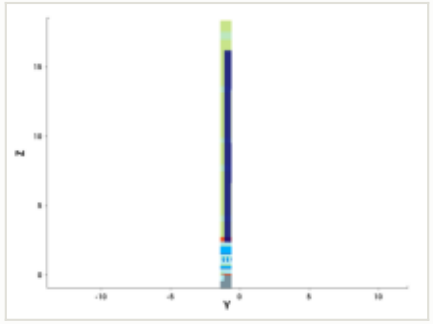

y cut at -1.035 µm

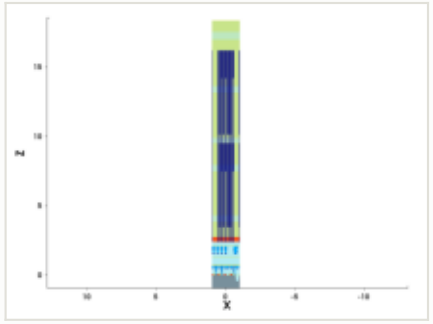

mask for this step

no mask for this step

steps by process area

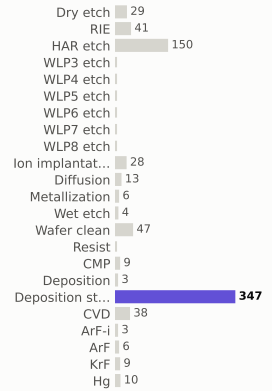

materials deposited (g)

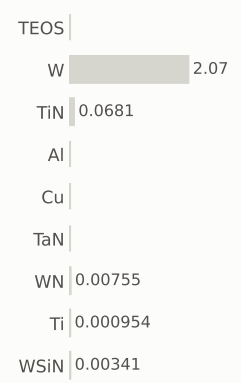

gases emitted (g)

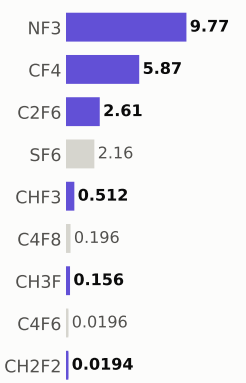

Step #9530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	966.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 605.8 of 1,872.8 (this step +0.328)

MPW materials — 57.8 of 132.5 (this step +0.0159)

GPW gases — 302.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

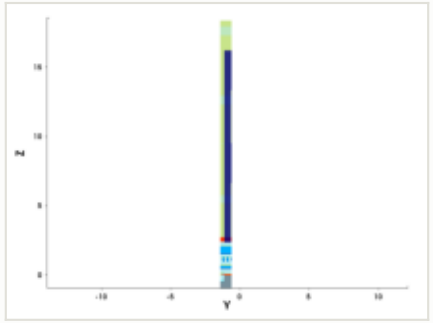

y cut at -1.035 µm

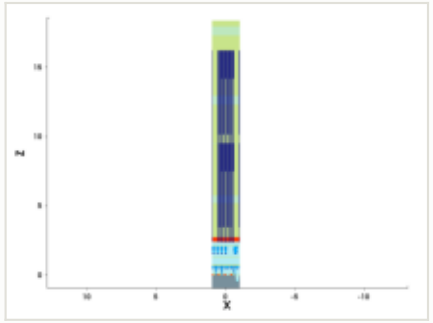

mask for this step

no mask for this step

steps by process area

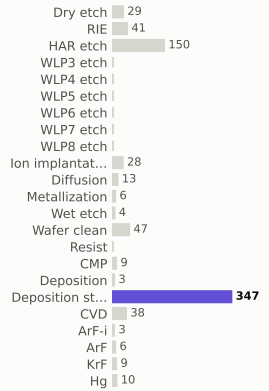

materials deposited (g)

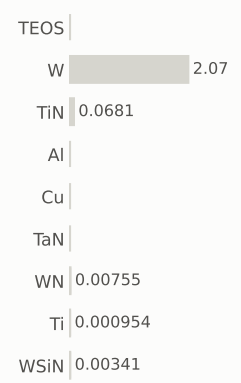

gases emitted (g)

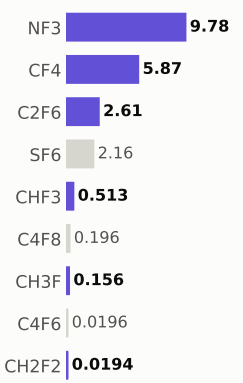

Step #9540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	966.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 606.2 of 1,872.8 (this step +0.328)

MPW materials — 57.8 of 132.5 (this step +0.0159)

GPW gases — 302.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

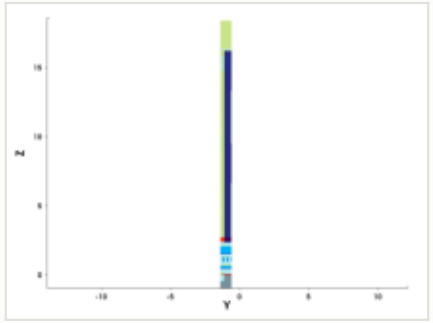

y cut at -1.035 µm

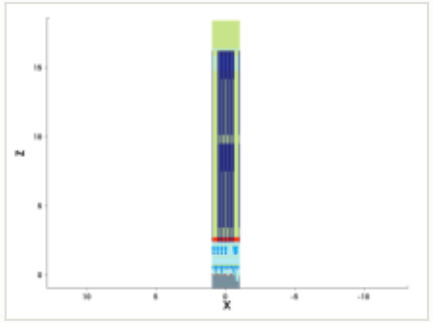

mask for this step

no mask for this step

steps by process area

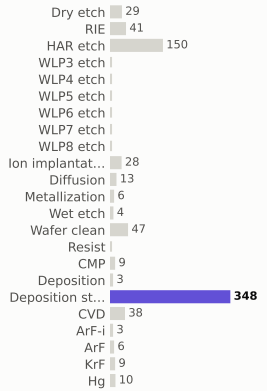

materials deposited (g)

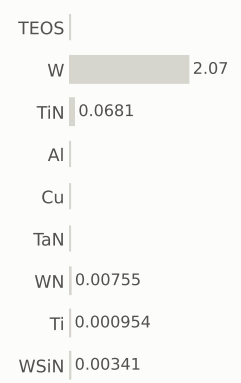

gases emitted (g)

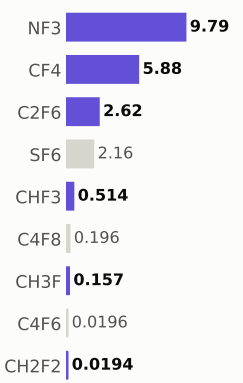

Step #9550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	967.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 606.5 of 1,872.8 (this step +0.328)

MPW materials — 57.8 of 132.5 (this step +0.0159)

GPW gases — 303.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

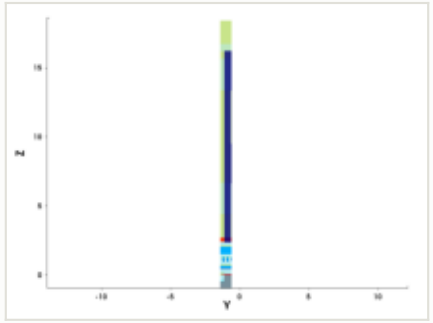

y cut at -1.035 µm

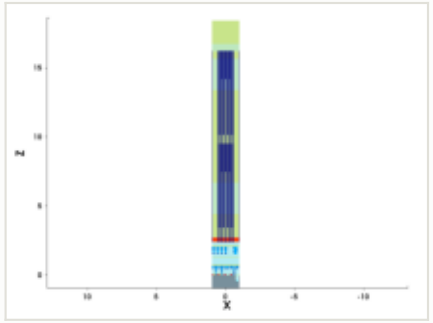

mask for this step

no mask for this step

steps by process area

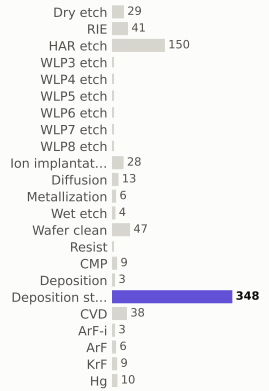

materials deposited (g)

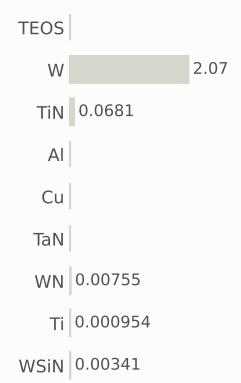

gases emitted (g)

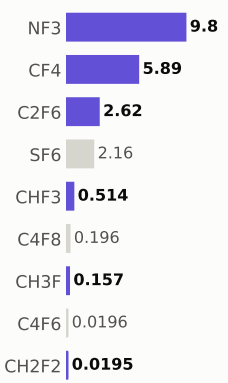

Step #9560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	968.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 606.8 of 1,872.8 (this step +0.328)

MPW materials — 57.8 of 132.5 (this step +0.0159)

GPW gases — 303.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

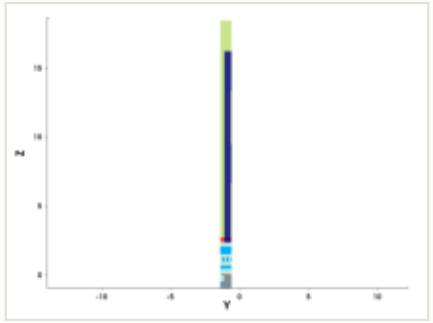

y cut at -1.035 µm

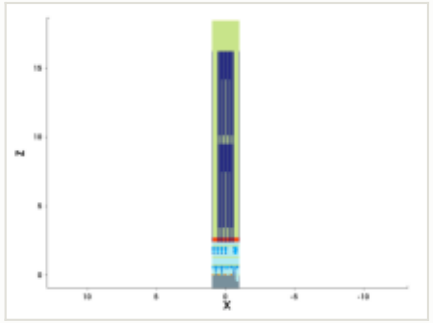

mask for this step

no mask for this step

steps by process area

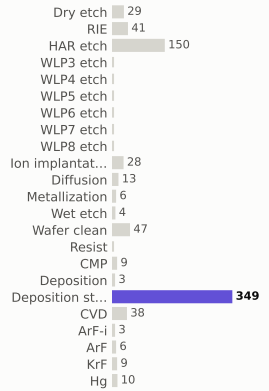

materials deposited (g)

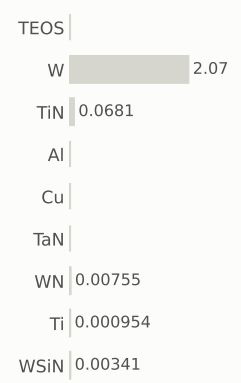

gases emitted (g)

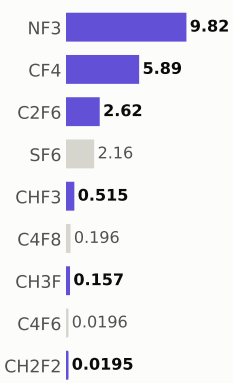

Step #9570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	968.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

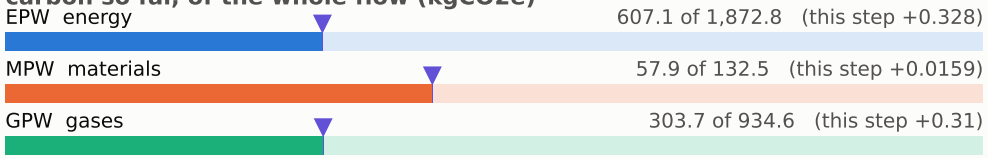

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

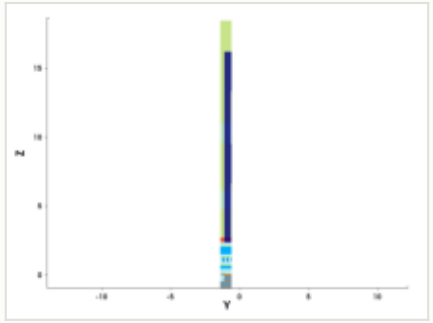

y cut at -1.035 µm

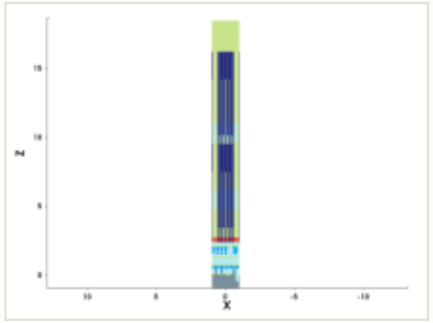

mask for this step

no mask for this step

steps by process area

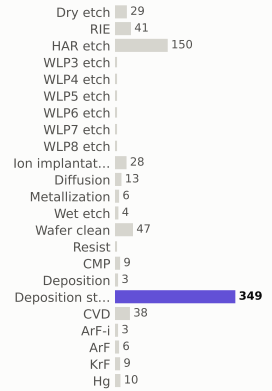

materials deposited (g)

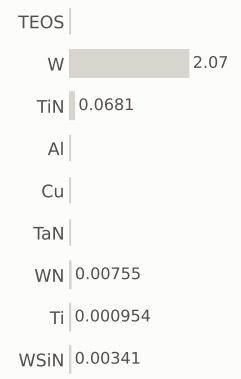

gases emitted (g)

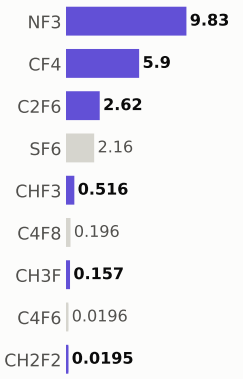

Step #9580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	969.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 607.5 of 1,872.8 (this step +0.328)

MPW materials — 57.9 of 132.5 (this step +0.0159)

GPW gases — 304.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

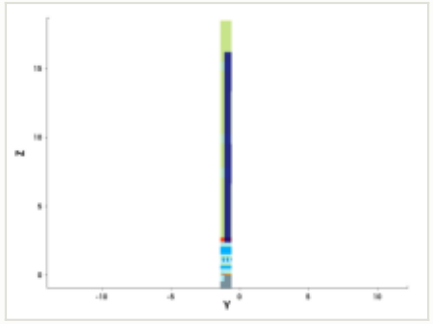

y cut at -1.035 µm

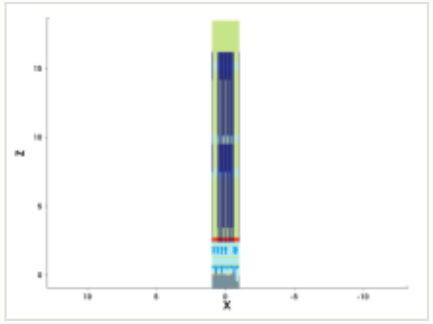

mask for this step

no mask for this step

steps by process area

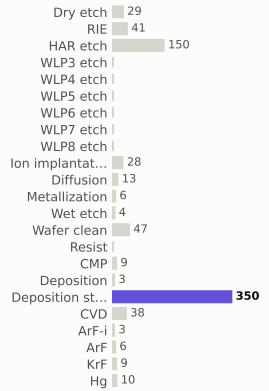

materials deposited (g)

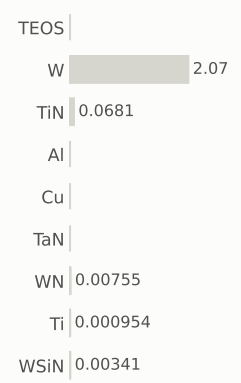

gases emitted (g)

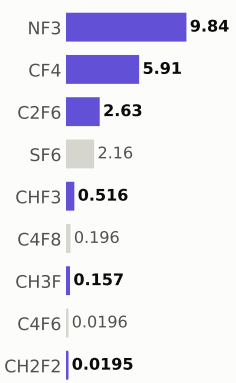

Step #9590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	970.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 607.8 of 1,872.8 (this step +0.328)

MPW materials — 57.9 of 132.5 (this step +0.0159)

GPW gases — 304.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

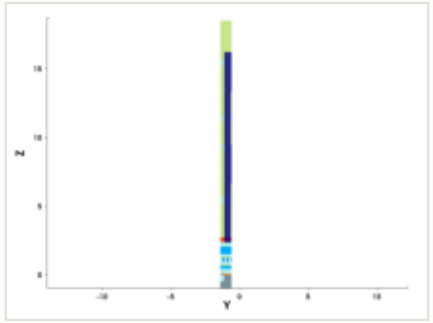

y cut at -1.035 µm

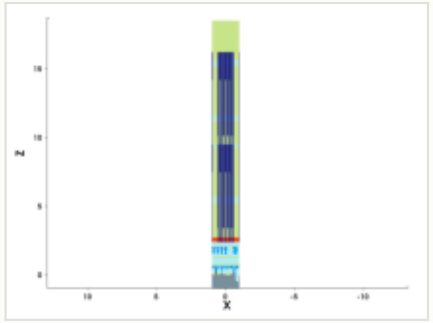

mask for this step

no mask for this step

steps by process area

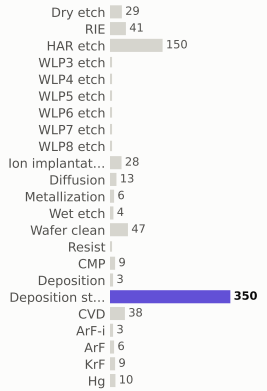

materials deposited (g)

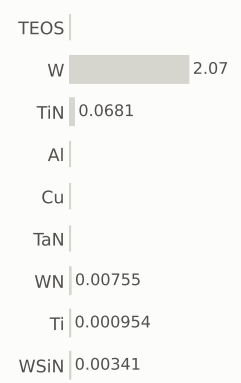

gases emitted (g)

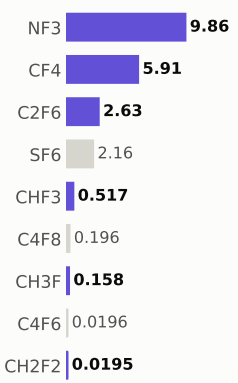

Step #9600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	970.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 608.1 of 1,872.8 (this step +0.328)

MPW materials — 57.9 of 132.5 (this step +0.0159)

GPW gases — 304.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

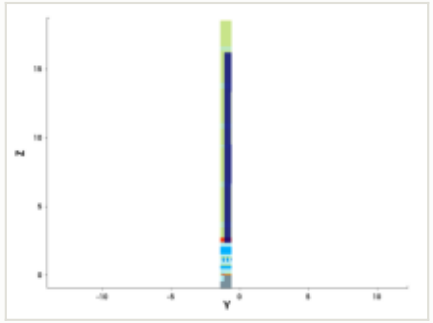

y cut at -1.035 µm

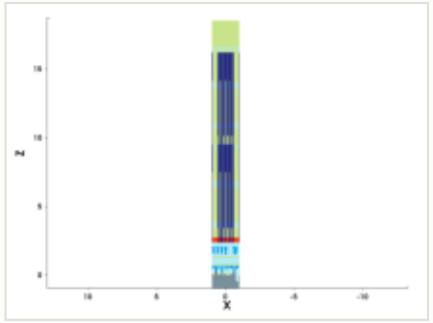

mask for this step

no mask for this step

steps by process area

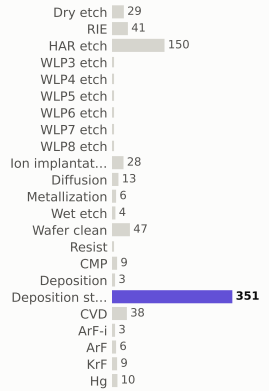

materials deposited (g)

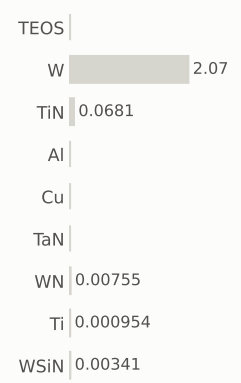

gases emitted (g)

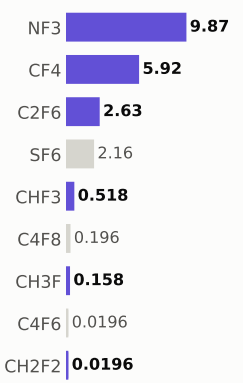

Step #9610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	971.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

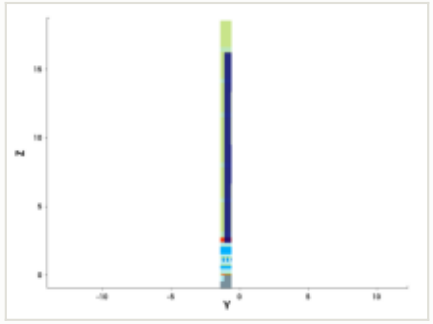

y cut at -1.035 µm

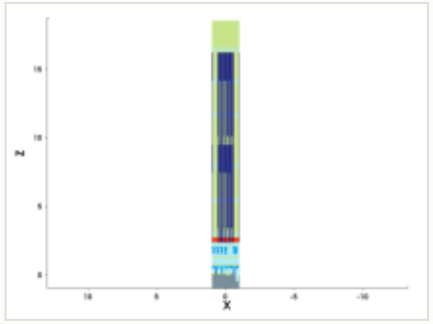

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 608.4 of 1,872.8 (this step +0.328)

MPW materials — 57.9 of 132.5 (this step +0.0159)

GPW gases — 305.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

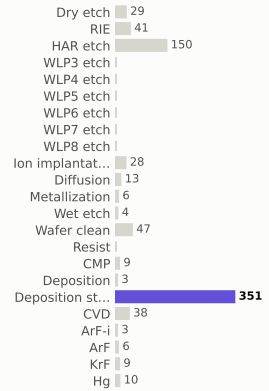

materials deposited (g)

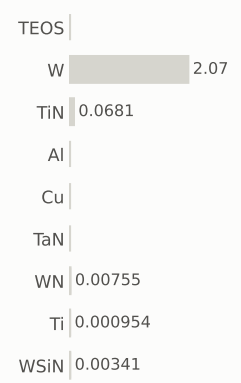

gases emitted (g)

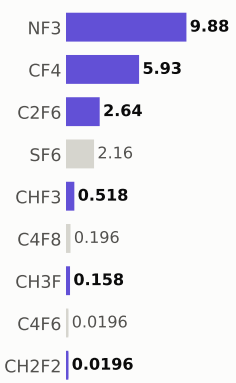

Step #9620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	972.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

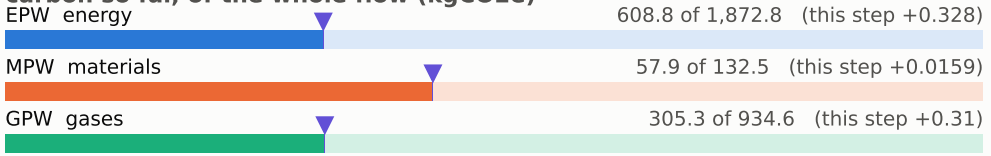

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

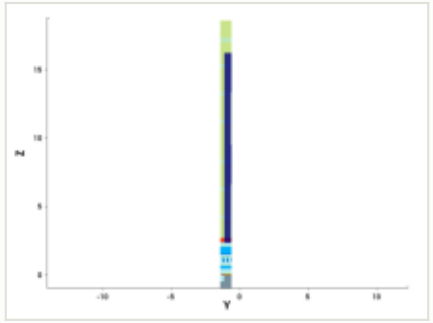

y cut at -1.035 µm

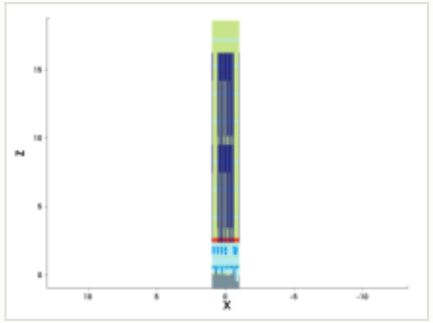

mask for this step

no mask for this step

steps by process area

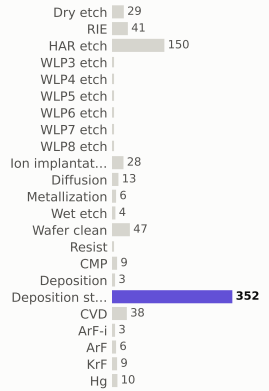

materials deposited (g)

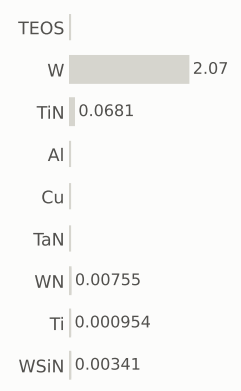

gases emitted (g)

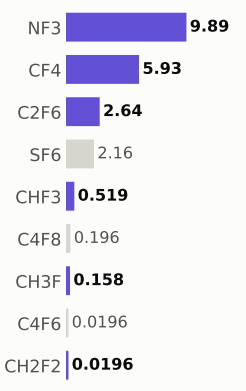

Step #9630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	972.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

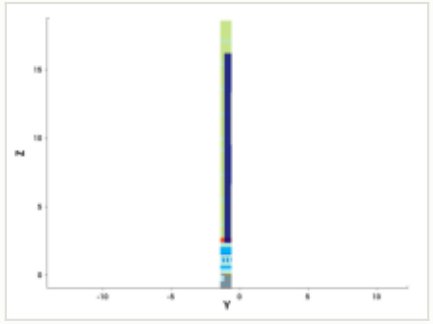

y cut at -1.035 µm

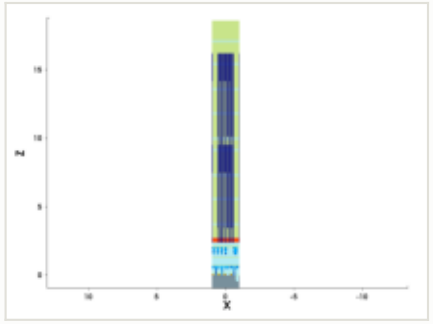

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 609.1 of 1,872.8 (this step +0.328)

MPW materials — 57.9 of 132.5 (this step +0.0159)

GPW gases — 305.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

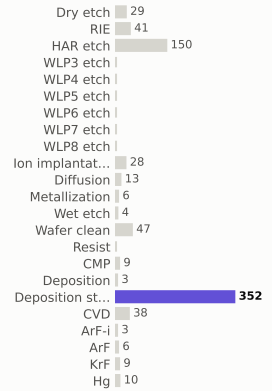

materials deposited (g)

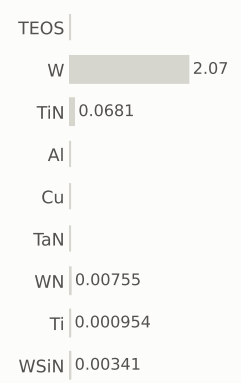

gases emitted (g)

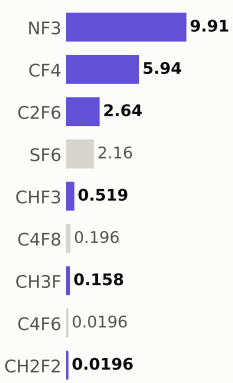

Step #9640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	973.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 609.4 of 1,872.8 (this step +0.328)

MPW materials — 58 of 132.5 (this step +0.0159)

GPW gases — 305.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

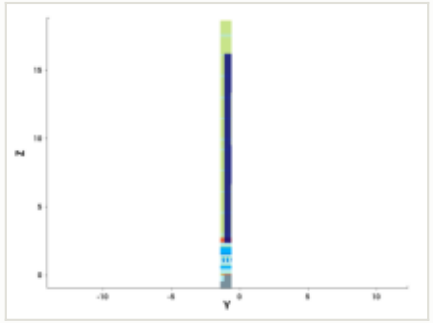

y cut at -1.035 µm

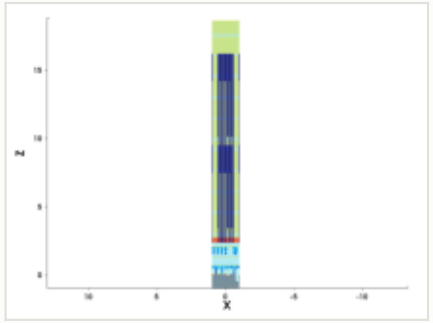

mask for this step

no mask for this step

steps by process area

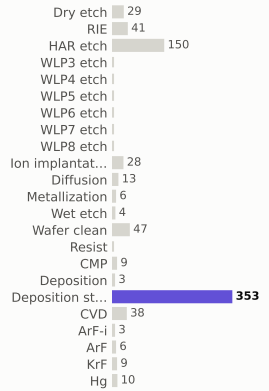

materials deposited (g)

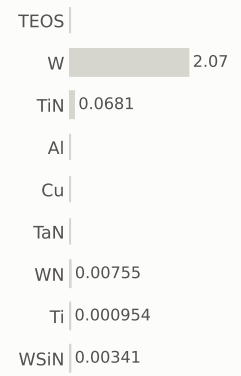

gases emitted (g)

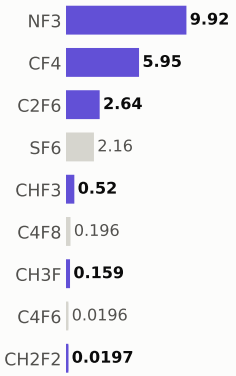

Step #9650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	973.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 609.8 of 1,872.8 (this step +0.328)

MPW materials — 58 of 132.5 (this step +0.0159)

GPW gases — 306.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

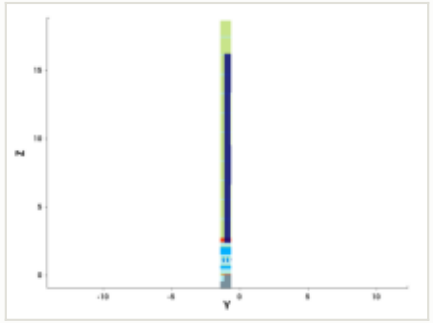

y cut at -1.035 µm

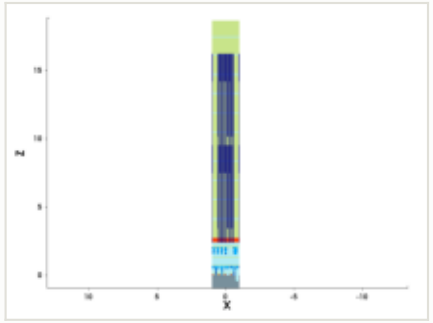

mask for this step

no mask for this step

steps by process area

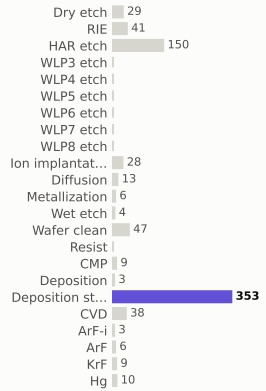

materials deposited (g)

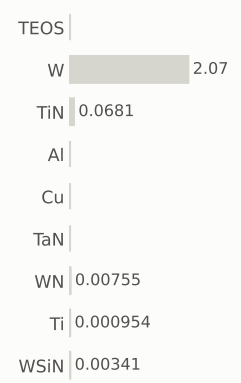

gases emitted (g)

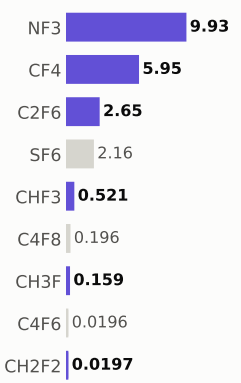

Step #9660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	974.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

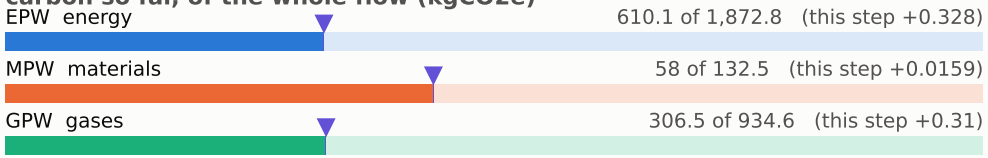

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

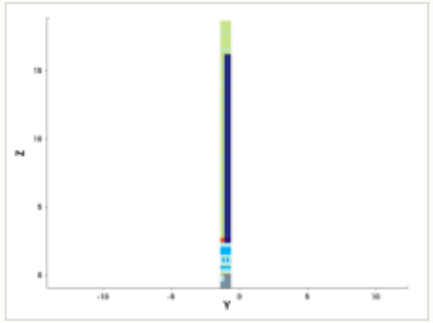

y cut at -1.035 µm

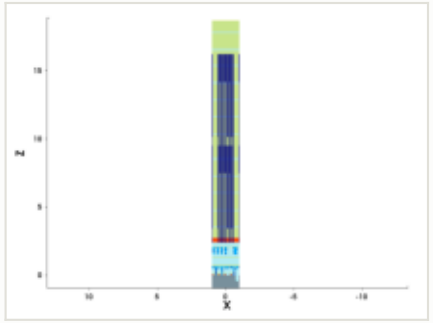

mask for this step

no mask for this step

steps by process area

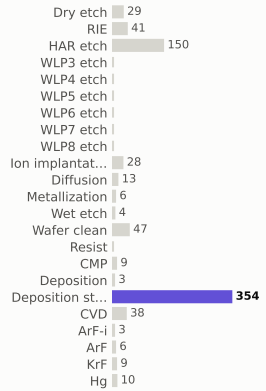

materials deposited (g)

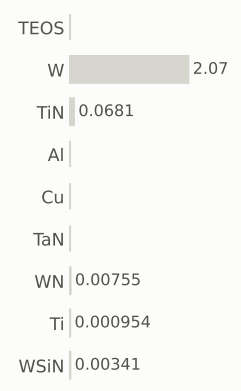

gases emitted (g)

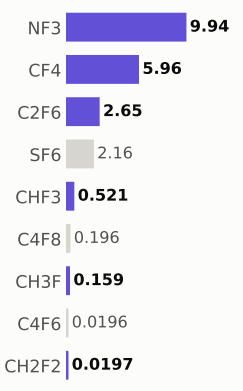

Step #9670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	975.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 610.4 of 1,872.8 (this step +0.328)

MPW materials — 58 of 132.5 (this step +0.0159)

GPW gases — 306.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

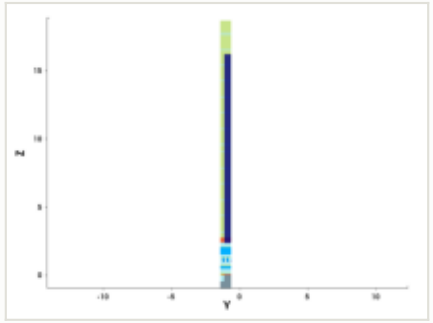

y cut at -1.035 µm

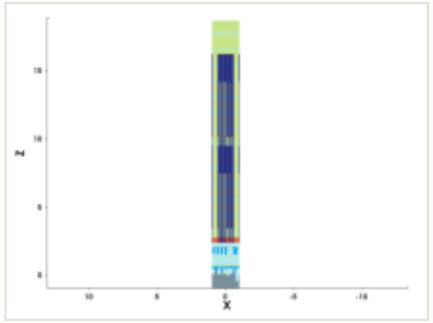

mask for this step

no mask for this step

steps by process area

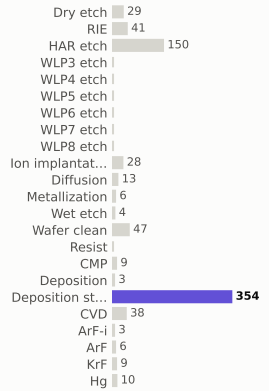

materials deposited (g)

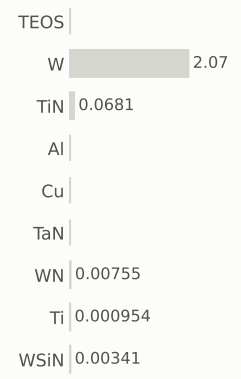

gases emitted (g)

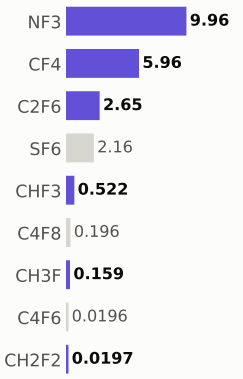

Step #9680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	975.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 610.7 of 1,872.8 (this step +0.328)

MPW materials — 58 of 132.5 (this step +0.0159)

GPW gases — 307.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

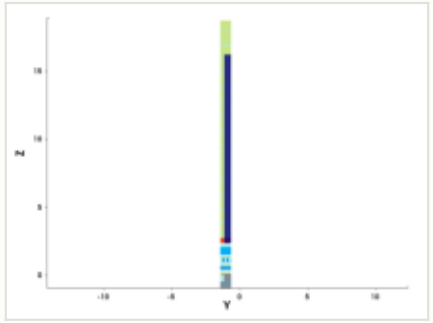

y cut at -1.035 µm

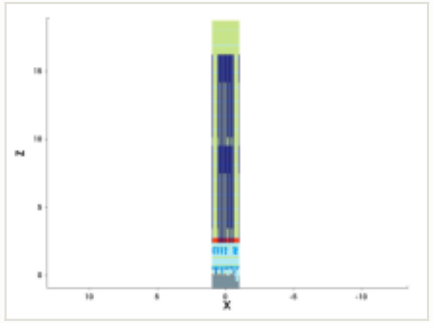

mask for this step

no mask for this step

steps by process area

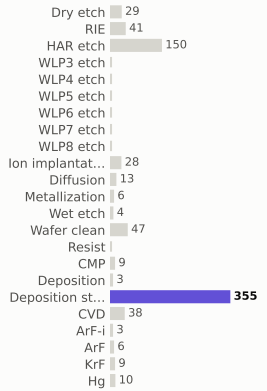

materials deposited (g)

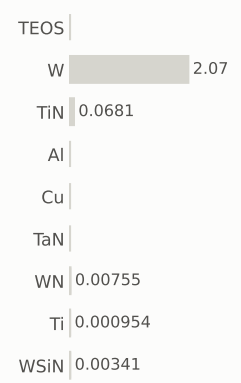

gases emitted (g)

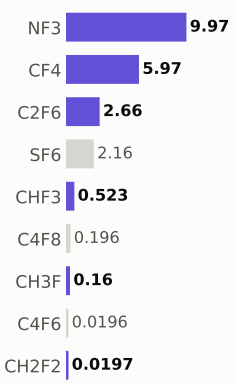

Step #9690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	976.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 611.1 of 1,872.8 (this step +0.328)

MPW materials — 58 of 132.5 (this step +0.0159)

GPW gases — 307.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

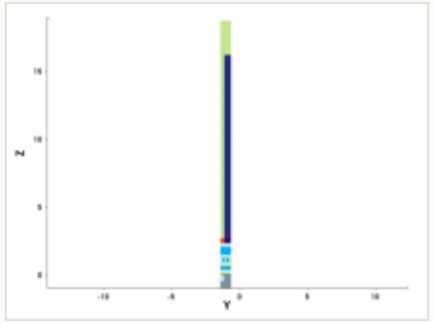

y cut at -1.035 µm

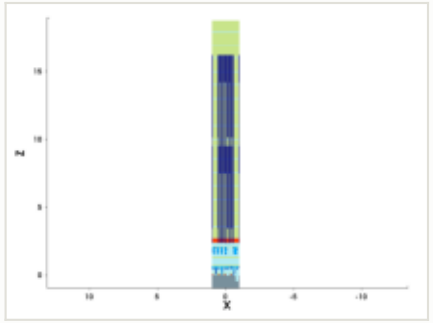

mask for this step

no mask for this step

steps by process area

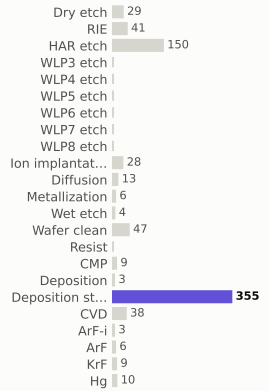

materials deposited (g)

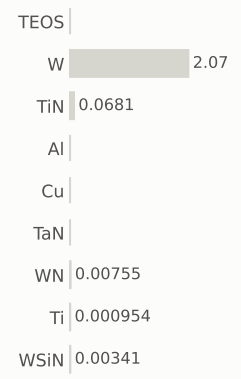

gases emitted (g)

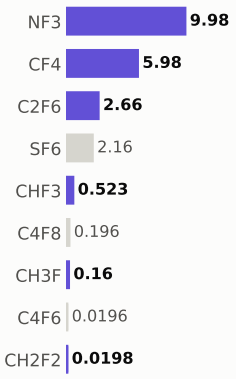

Step #9700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	977.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 611.4 of 1,872.8 (this step +0.328)

MPW materials — 58.1 of 132.5 (this step +0.0159)

GPW gases — 307.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

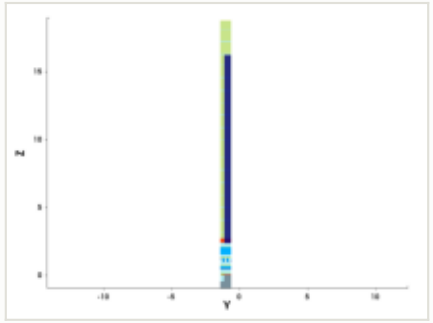

y cut at -1.035 µm

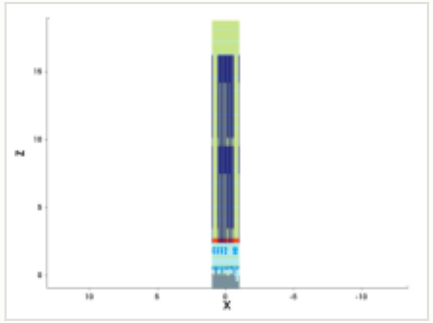

mask for this step

no mask for this step

steps by process area

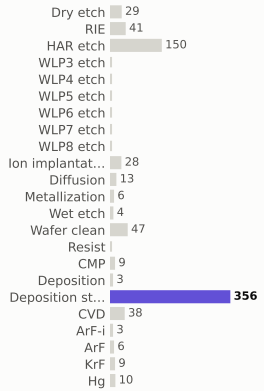

materials deposited (g)

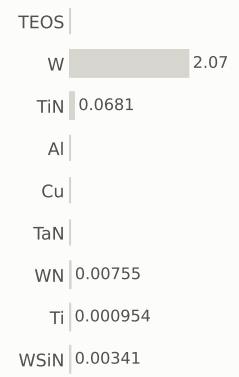

gases emitted (g)

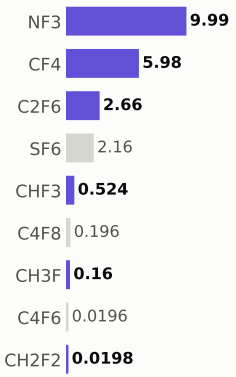

Step #9710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	977.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 611.7 of 1,872.8 (this step +0.328)

MPW materials — 58.1 of 132.5 (this step +0.0159)

GPW gases — 308.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

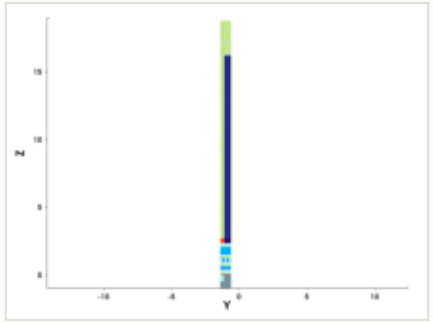

y cut at -1.035 µm

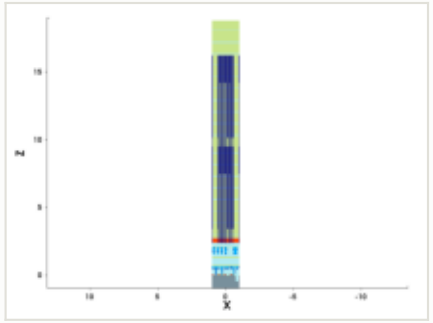

mask for this step

no mask for this step

steps by process area

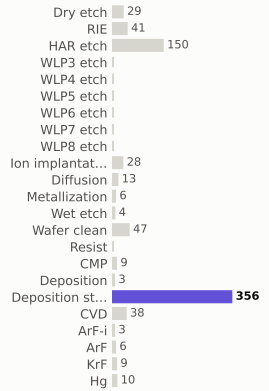

materials deposited (g)

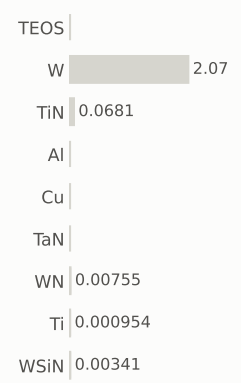

gases emitted (g)

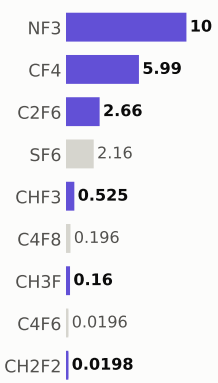

Step #9720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	978.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 612.1 of 1,872.8 (this step +0.328)

MPW materials — 58.1 of 132.5 (this step +0.0159)

GPW gases — 308.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

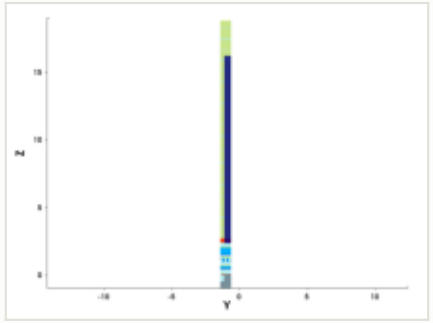

y cut at -1.035 µm

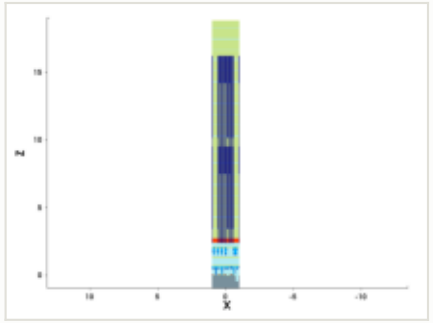

mask for this step

no mask for this step

steps by process area

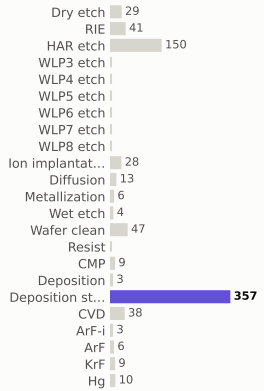

materials deposited (g)

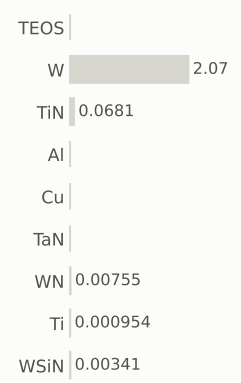

gases emitted (g)

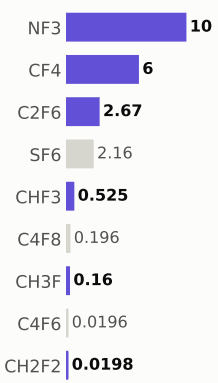

Step #9730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	979.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 612.4 of 1,872.8 (this step +0.328)

MPW materials — 58.1 of 132.5 (this step +0.0159)

GPW gases — 308.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

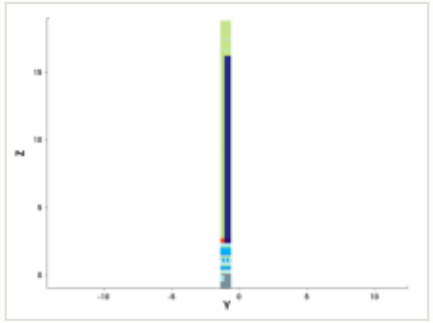

y cut at -1.035 µm

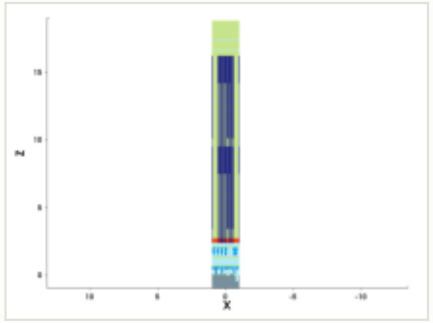

mask for this step

no mask for this step

steps by process area

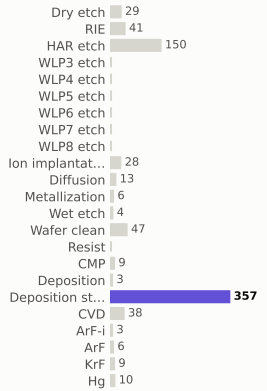

materials deposited (g)

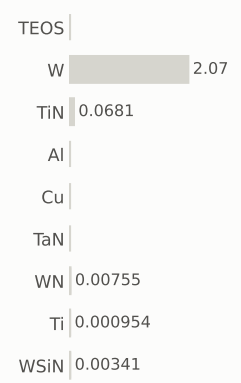

gases emitted (g)

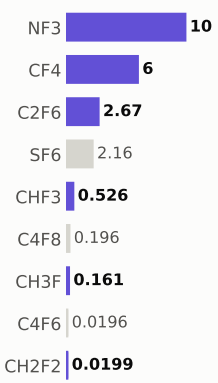

Step #9740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	979.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

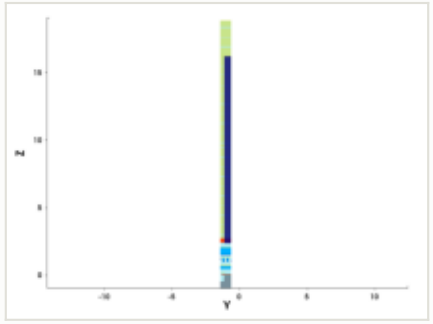

y cut at -1.035 µm

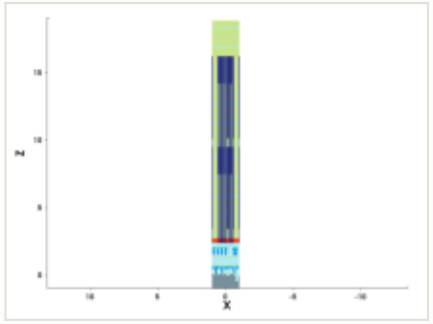

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 612.7 of 1,872.8 (this step +0.328)

MPW materials — 58.1 of 132.5 (this step +0.0159)

GPW gases — 309.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

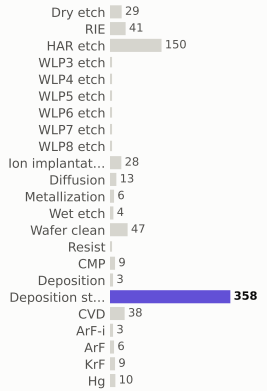

materials deposited (g)

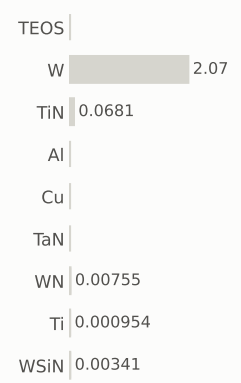

gases emitted (g)

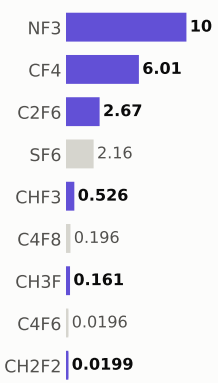

Step #9750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	980.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 613.0 of 1,872.8 (this step +0.328)

MPW materials — 58.1 of 132.5 (this step +0.0159)

GPW gases — 309.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

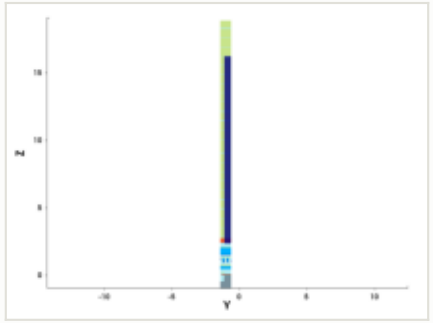

y cut at -1.035 µm

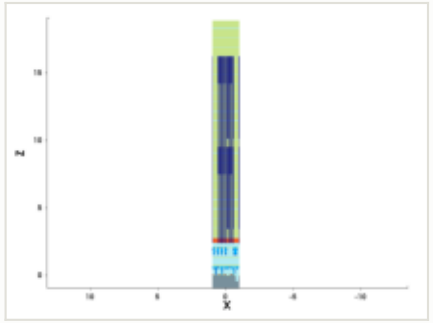

mask for this step

no mask for this step

steps by process area

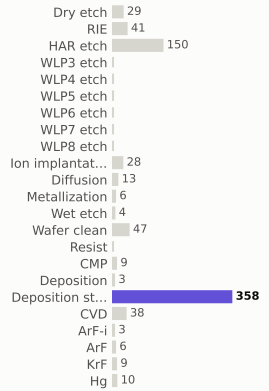

materials deposited (g)

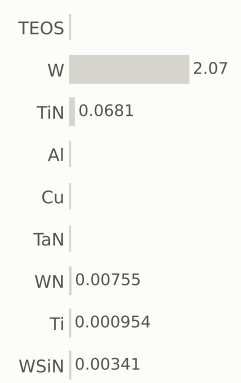

gases emitted (g)

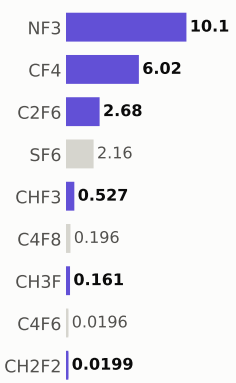

Step #9760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	981.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

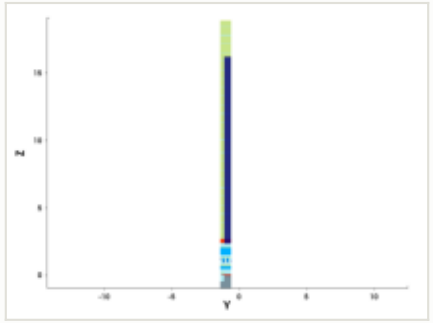

y cut at -1.035 µm

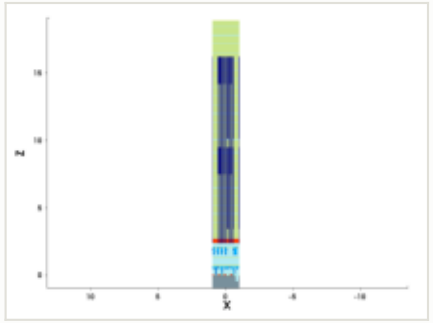

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 613.4 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 309.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

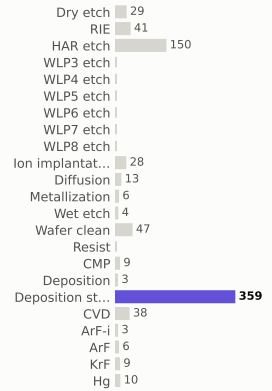

materials deposited (g)

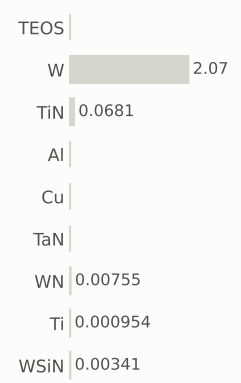

gases emitted (g)

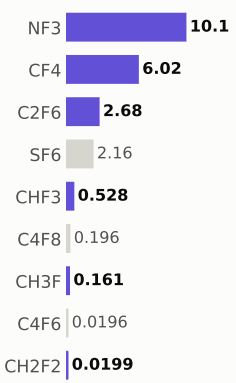

Step #9770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	981.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

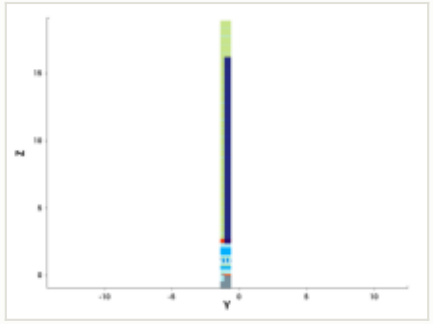

y cut at -1.035 µm

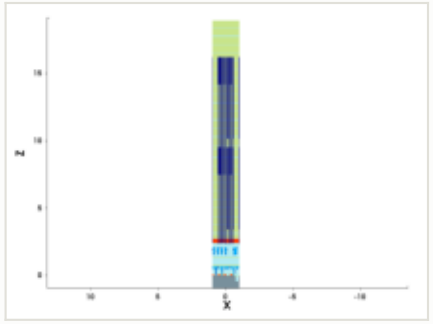

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 613.7 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 309.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

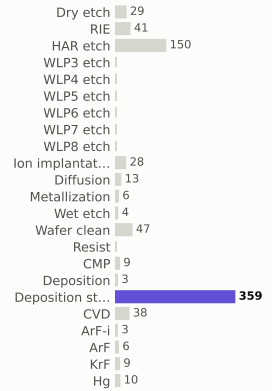

materials deposited (g)

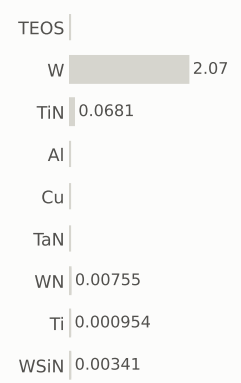

gases emitted (g)

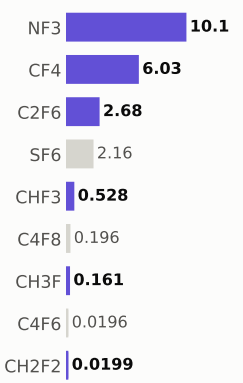

Step #9780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	982.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

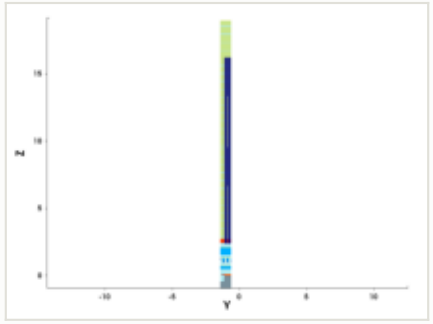

y cut at -1.035 µm

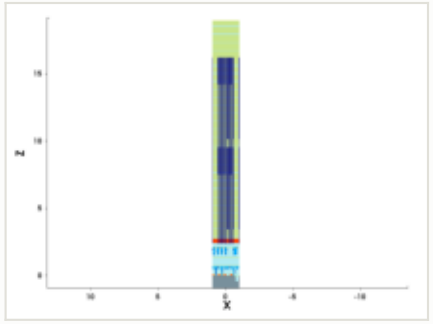

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 614.0 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 310.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

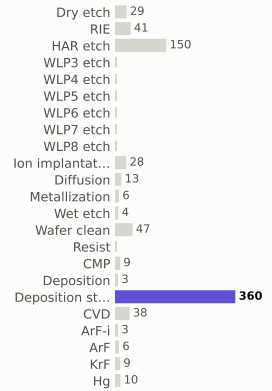

materials deposited (g)

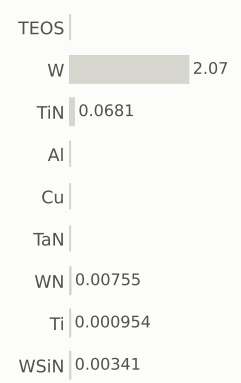

gases emitted (g)

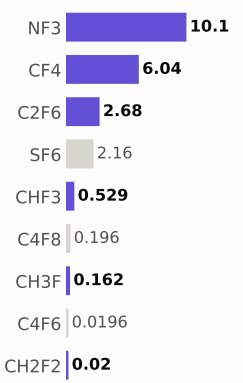

Step #9790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	983.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

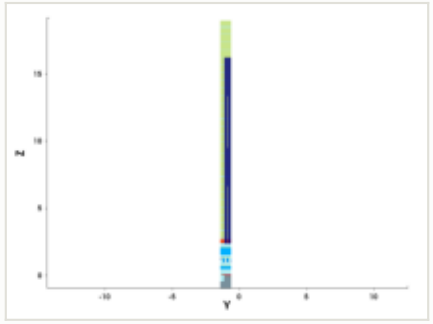

y cut at -1.035 µm

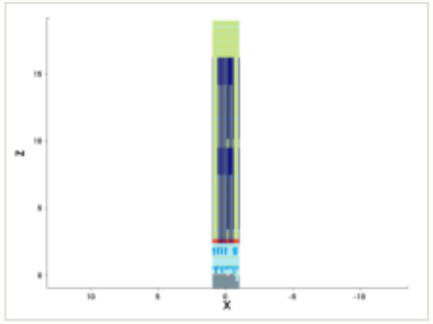

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 614.4 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 310.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

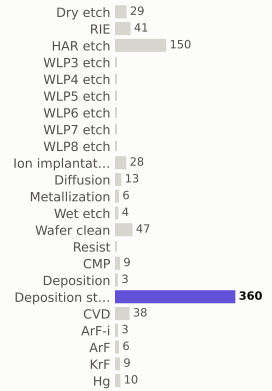

materials deposited (g)

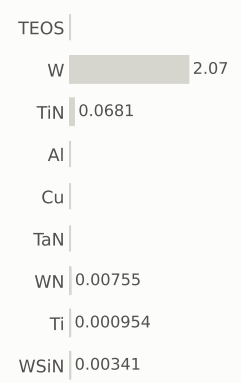

gases emitted (g)

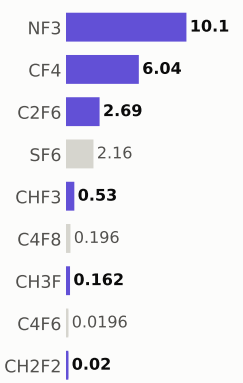

Step #9800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	983.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 614.7 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 310.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

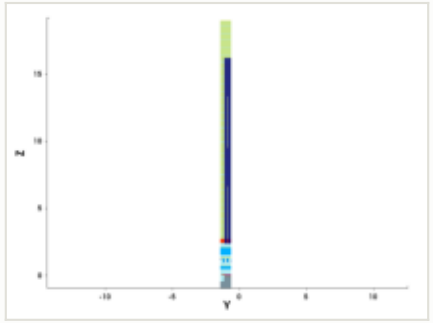

y cut at -1.035 µm

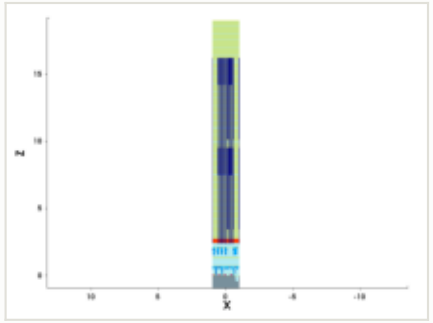

mask for this step

no mask for this step

steps by process area

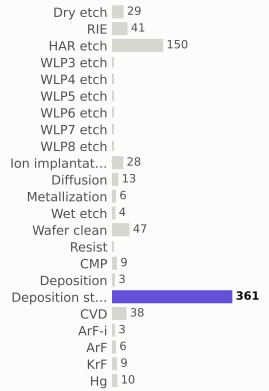

materials deposited (g)

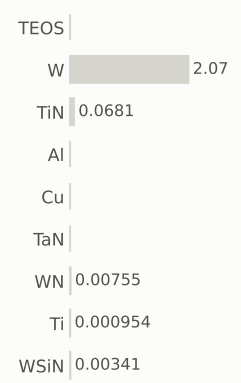

gases emitted (g)

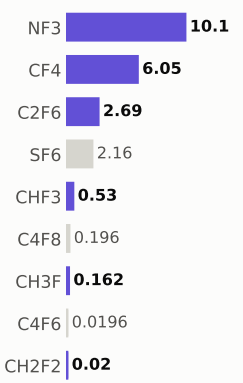

Step #9810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	984.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

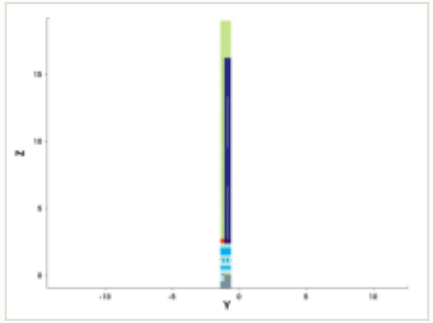

y cut at -1.035 µm

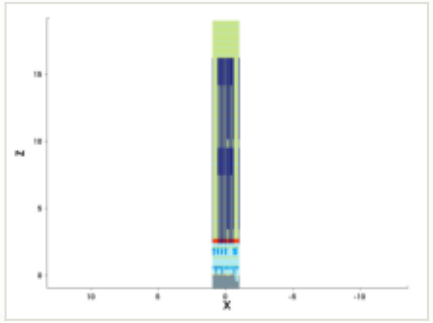

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 615.0 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 311.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

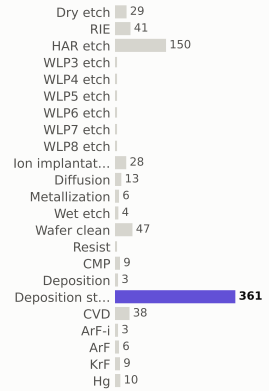

materials deposited (g)

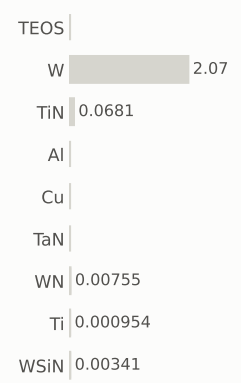

gases emitted (g)

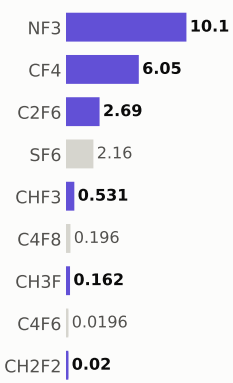

Step #9820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	985.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

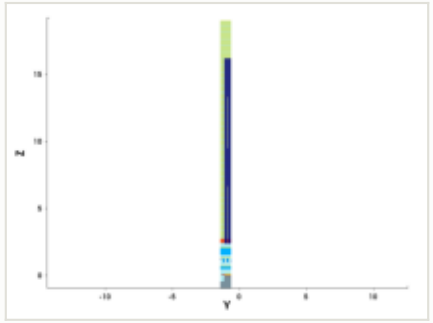

y cut at -1.035 µm

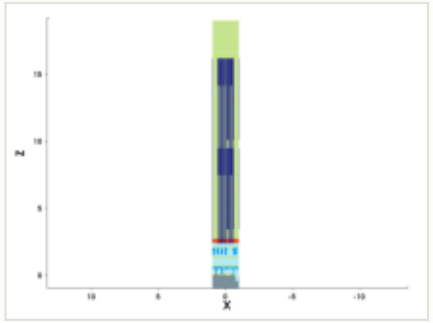

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 615.3 of 1,872.8 (this step +0.328)

MPW materials — 58.2 of 132.5 (this step +0.0159)

GPW gases — 311.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

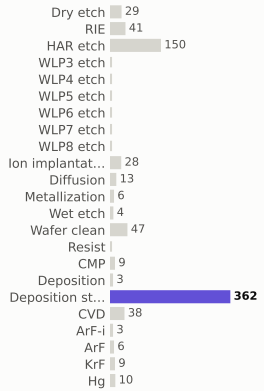

materials deposited (g)

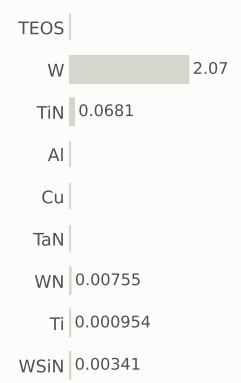

gases emitted (g)

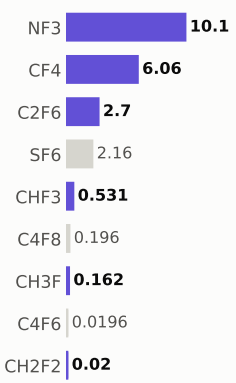

Step #9830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	985.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 615.7 of 1,872.8 (this step +0.328)

MPW materials — 58.3 of 132.5 (this step +0.0159)

GPW gases — 311.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

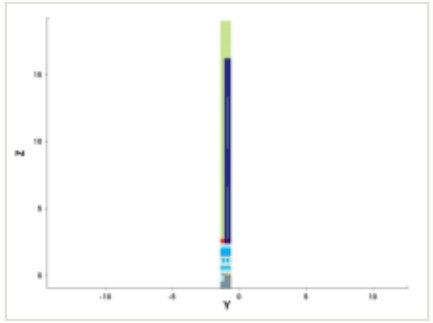

y cut at -1.035 µm

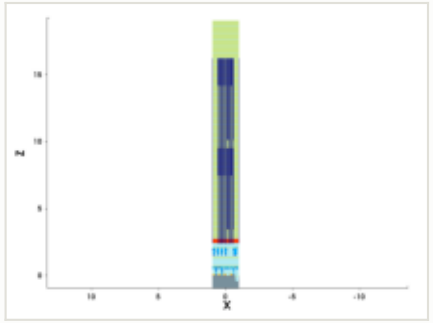

mask for this step

no mask for this step

steps by process area

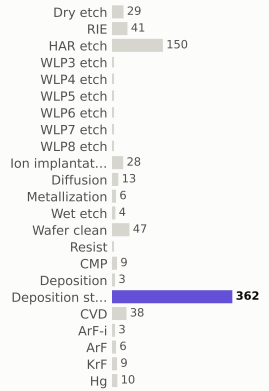

materials deposited (g)

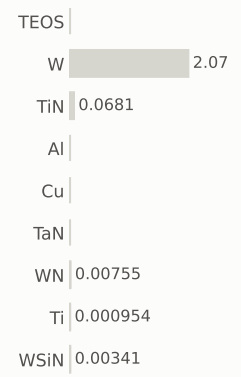

gases emitted (g)

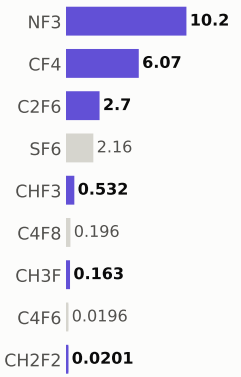

Step #9840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	986.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 616.0 of 1,872.8 (this step +0.328)

MPW materials — 58.3 of 132.5 (this step +0.0159)

GPW gases — 312.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

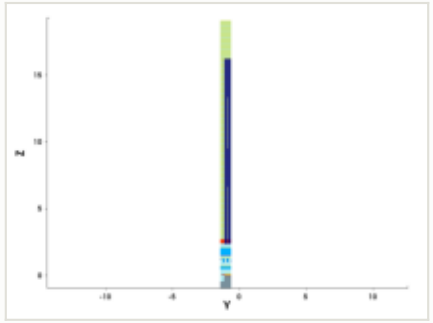

y cut at -1.035 µm

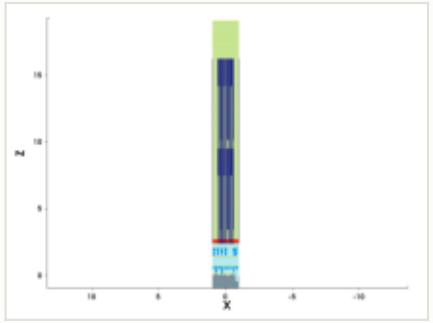

mask for this step

no mask for this step

steps by process area

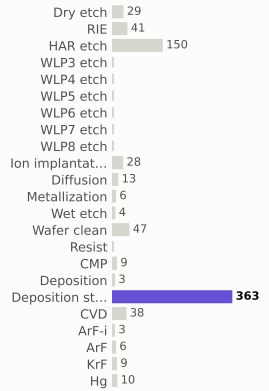

materials deposited (g)

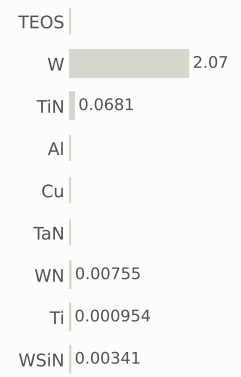

gases emitted (g)

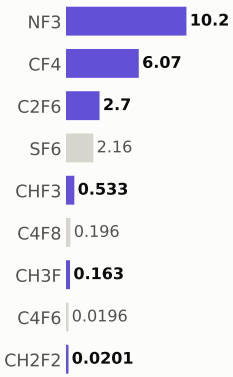

Step #9850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	987.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 616.3 of 1,872.8 (this step +0.328)

MPW materials — 58.3 of 132.5 (this step +0.0159)

GPW gases — 312.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

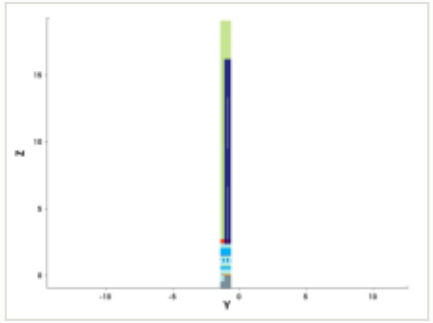

y cut at -1.035 µm

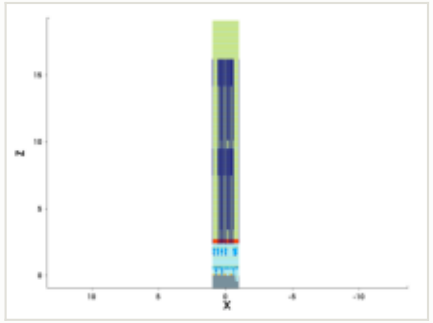

mask for this step

no mask for this step

steps by process area

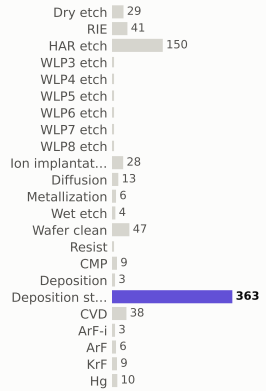

materials deposited (g)

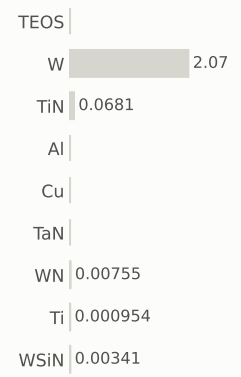

gases emitted (g)

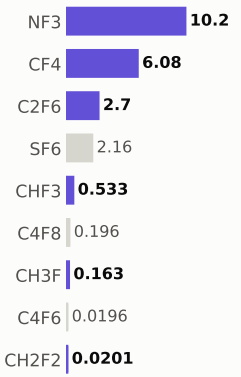

Step #9860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	987.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 616.6 of 1,872.8 (this step +0.328)

MPW materials — 58.3 of 132.5 (this step +0.0159)

GPW gases — 312.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

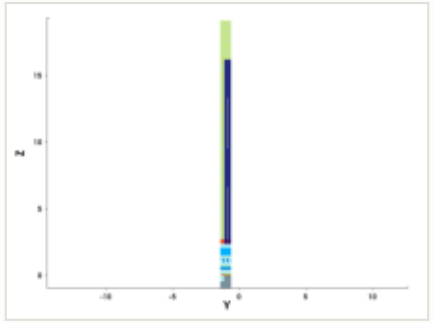

y cut at -1.035 µm

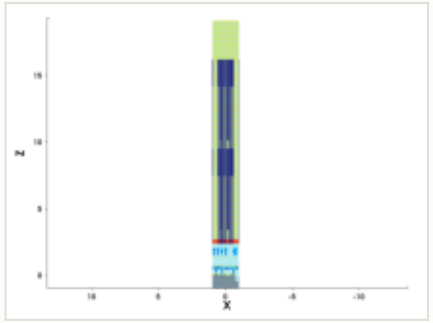

mask for this step

no mask for this step

steps by process area

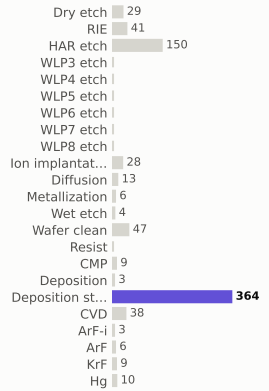

materials deposited (g)

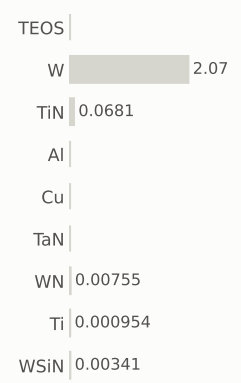

gases emitted (g)

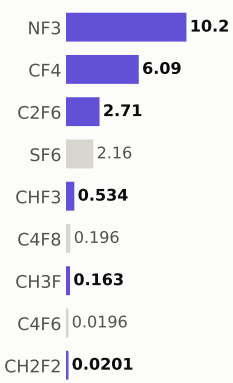

Step #9870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	988.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 617.0 of 1,872.8 (this step +0.328)

MPW materials — 58.3 of 132.5 (this step +0.0159)

GPW gases — 313.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

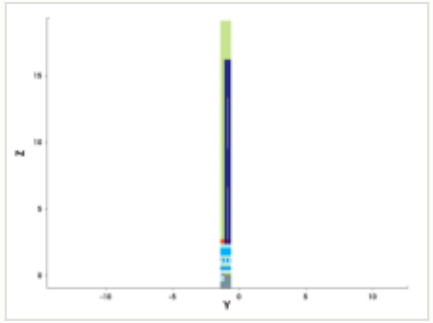

y cut at -1.035 µm

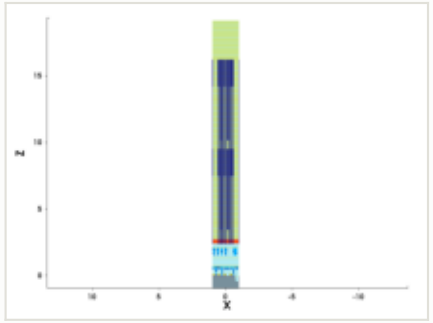

mask for this step

no mask for this step

steps by process area

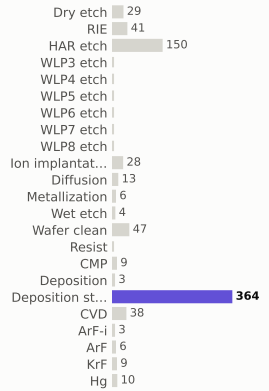

materials deposited (g)

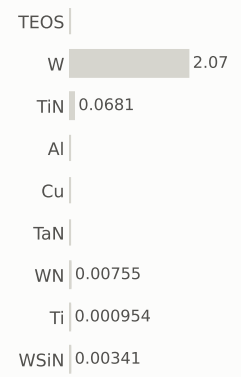

gases emitted (g)

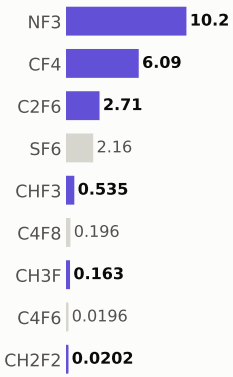

Step #9880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	989.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 617.3 of 1,872.8 (this step +0.328)

MPW materials — 58.3 of 132.5 (this step +0.0159)

GPW gases — 313.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

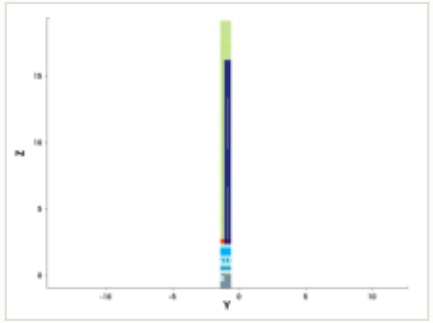

y cut at -1.035 µm

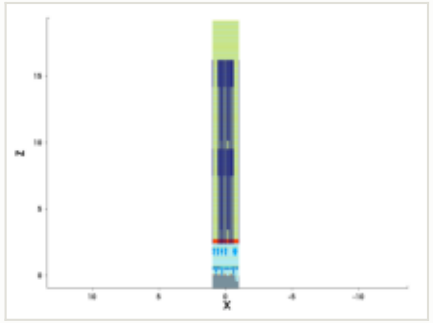

mask for this step

no mask for this step

steps by process area

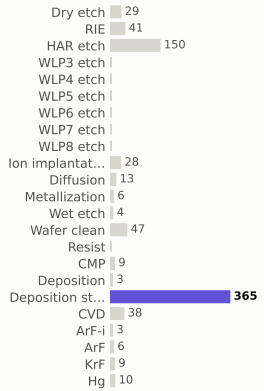

materials deposited (g)

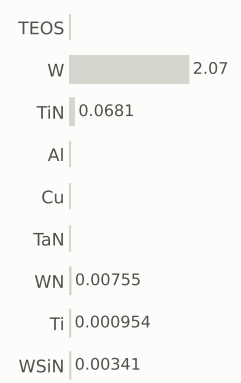

gases emitted (g)

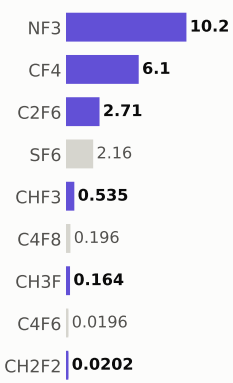

Step #9890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	989.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 617.6 of 1,872.8 (this step +0.328)

MPW materials — 58.4 of 132.5 (this step +0.0159)

GPW gases — 313.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

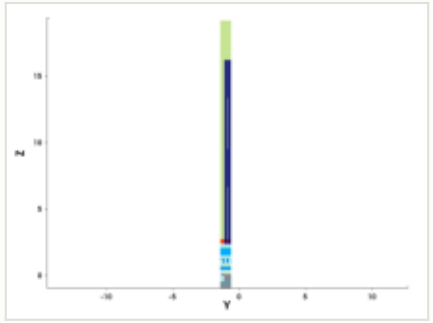

y cut at -1.035 µm

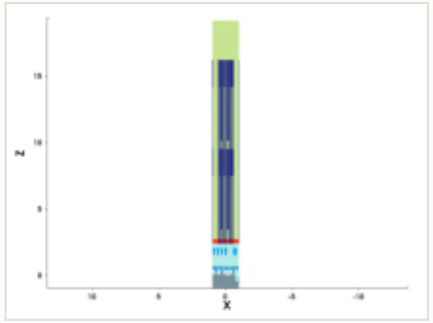

mask for this step

no mask for this step

steps by process area

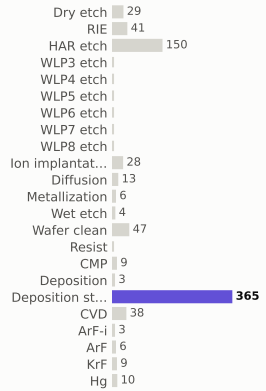

materials deposited (g)

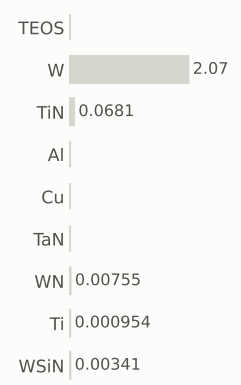

gases emitted (g)

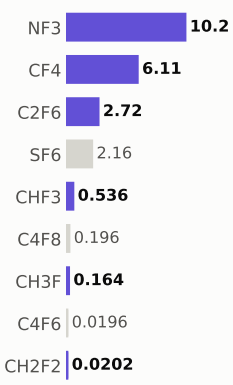

Step #9900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	990.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

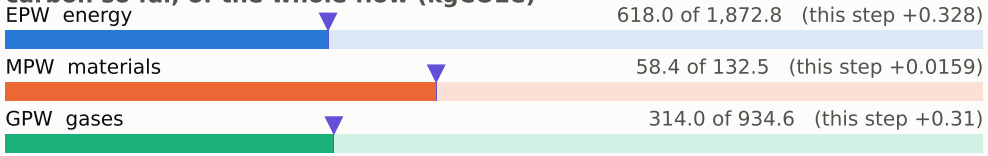

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

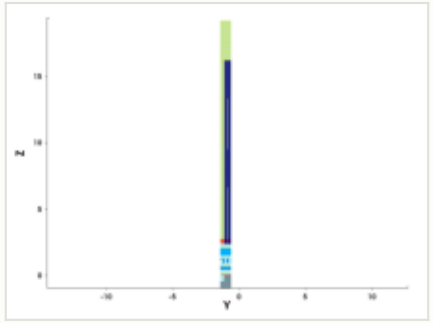

y cut at -1.035 µm

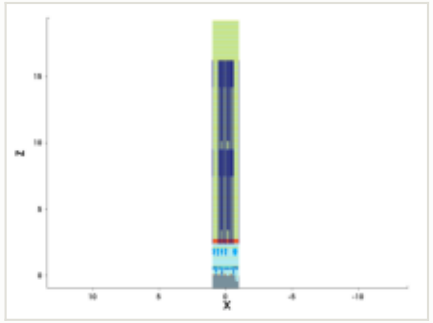

mask for this step

no mask for this step

steps by process area

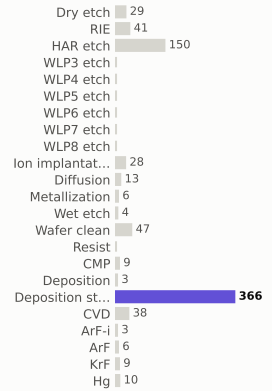

materials deposited (g)

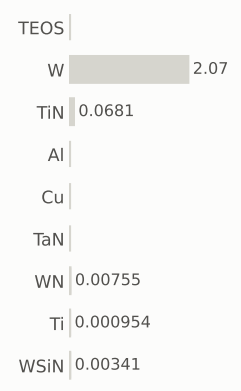

gases emitted (g)

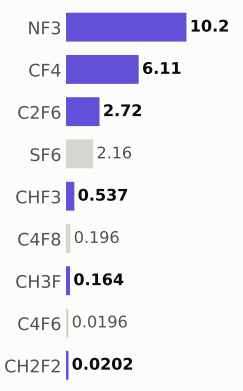

Step #9910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	990.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

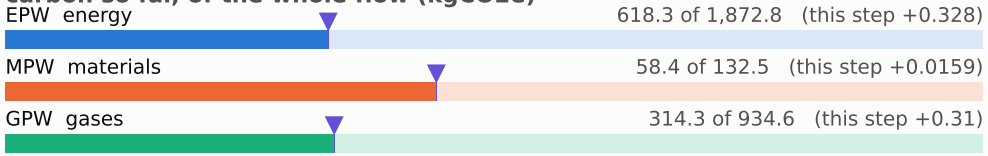

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

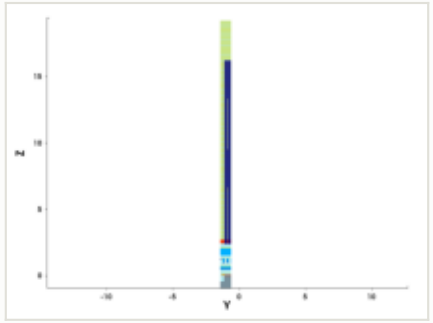

y cut at -1.035 µm

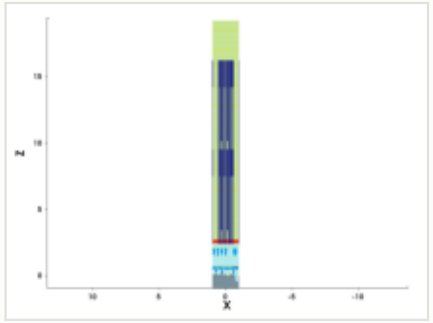

mask for this step

no mask for this step

steps by process area

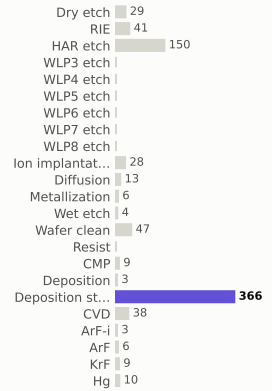

materials deposited (g)

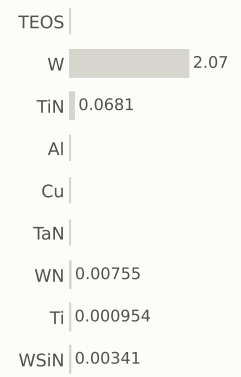

gases emitted (g)

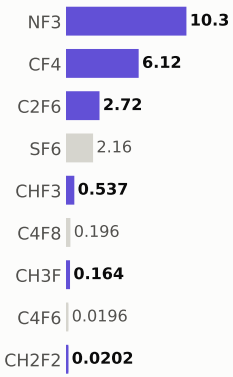

Step #9920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	991.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

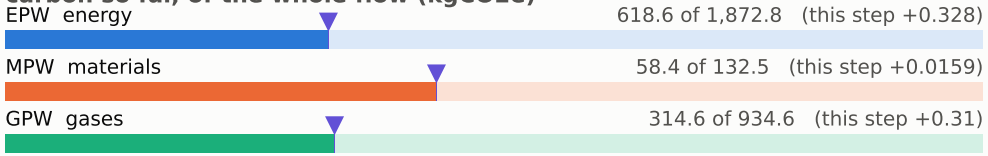

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

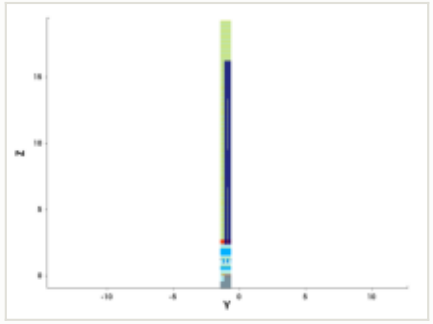

y cut at -1.035 µm

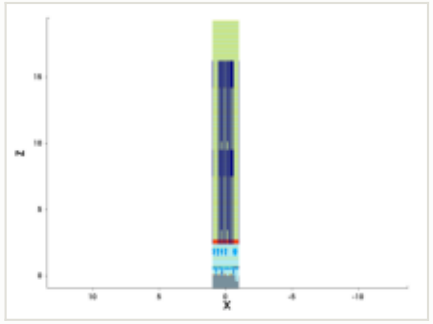

mask for this step

no mask for this step

steps by process area

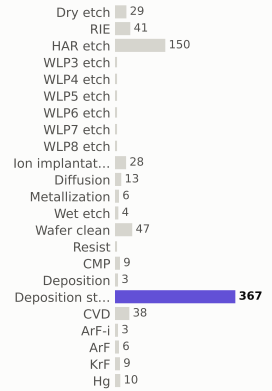

materials deposited (g)

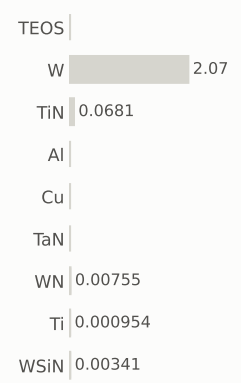

gases emitted (g)

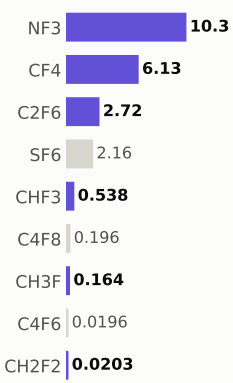

Step #9930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	992.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

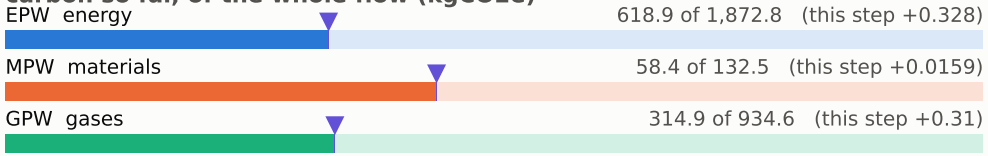

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

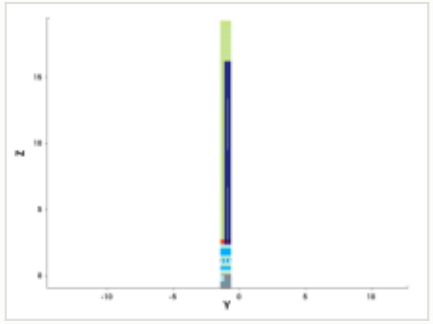

y cut at -1.035 µm

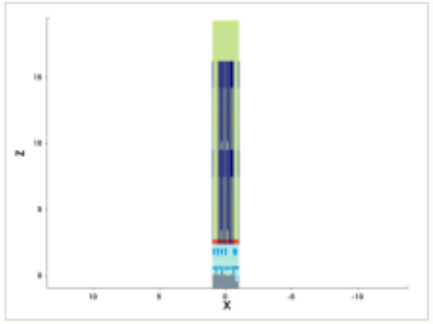

mask for this step

no mask for this step

steps by process area

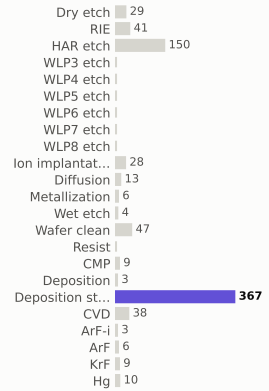

materials deposited (g)

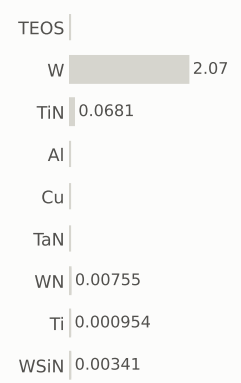

gases emitted (g)

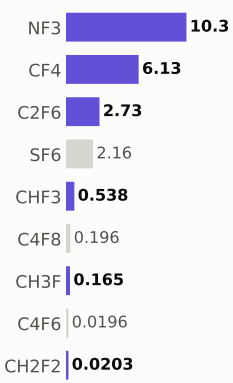

Step #9940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	992.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

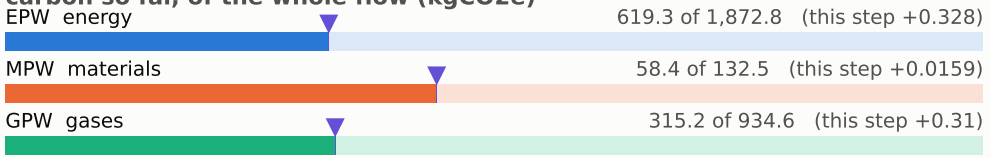

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

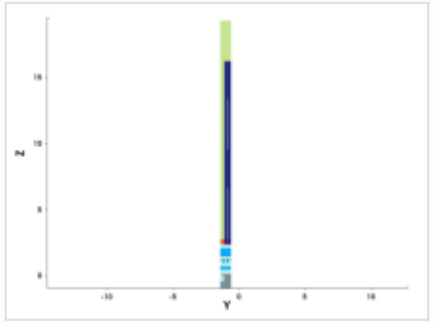

y cut at -1.035 µm

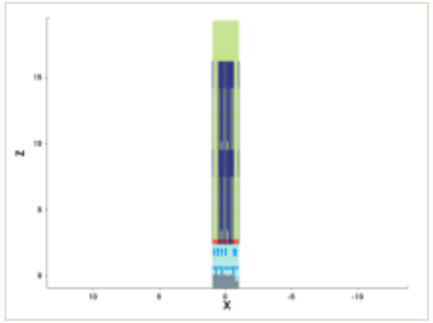

mask for this step

no mask for this step

steps by process area

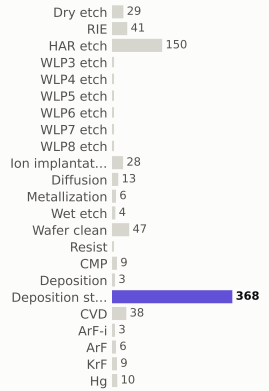

materials deposited (g)

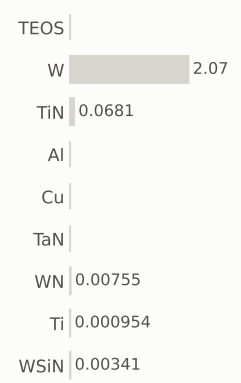

gases emitted (g)

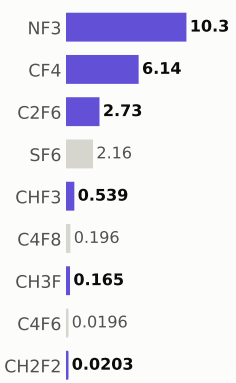

Step #9950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	993.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

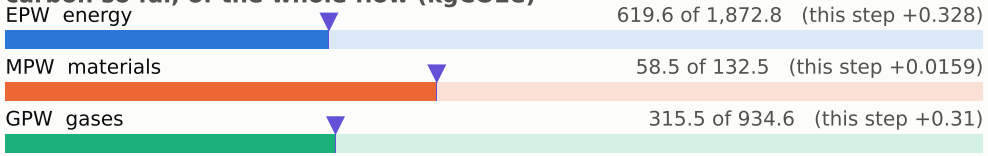

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

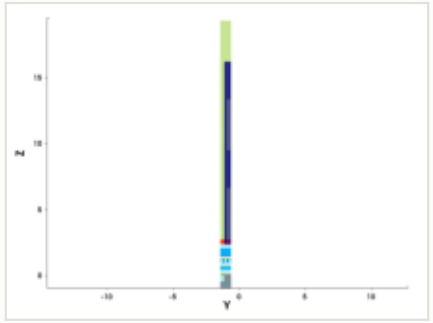

y cut at -1.035 µm

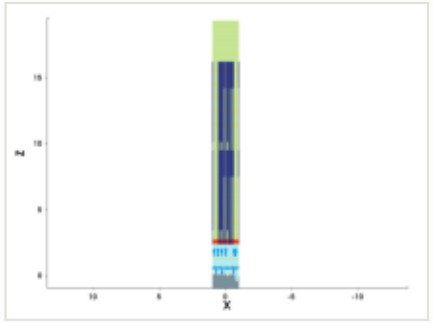

mask for this step

no mask for this step

steps by process area

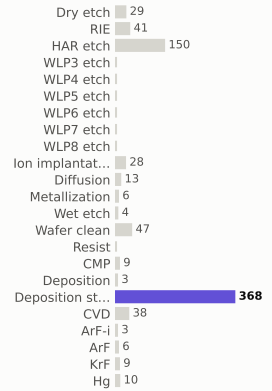

materials deposited (g)

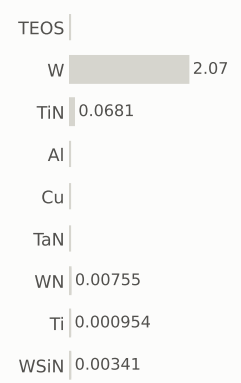

gases emitted (g)

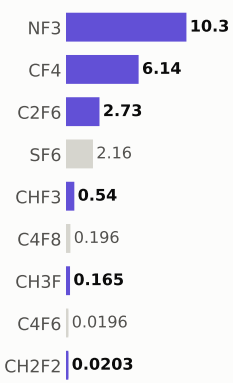

Step #9960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	994.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

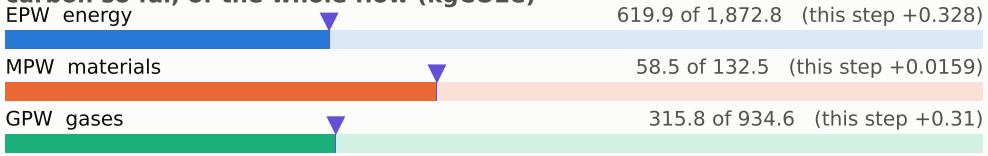

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

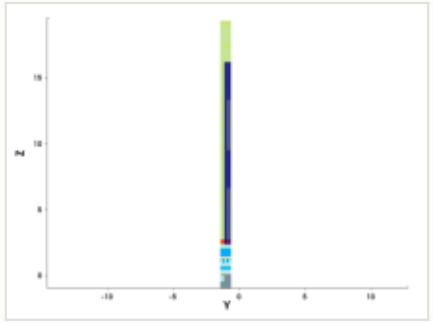

y cut at -1.035 µm

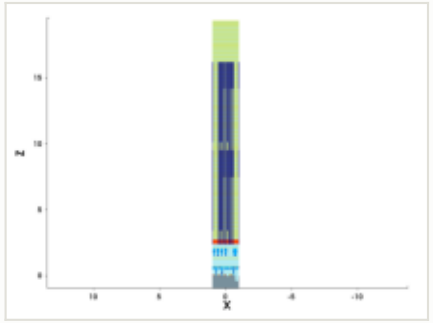

mask for this step

no mask for this step

steps by process area

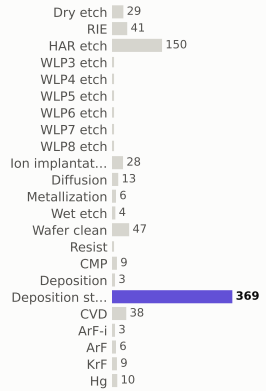

materials deposited (g)

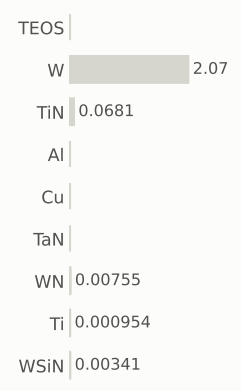

gases emitted (g)

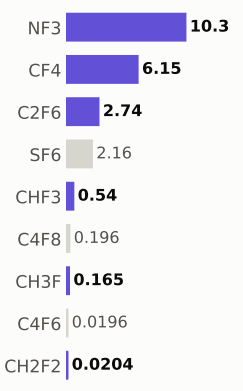

Step #9970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	994.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

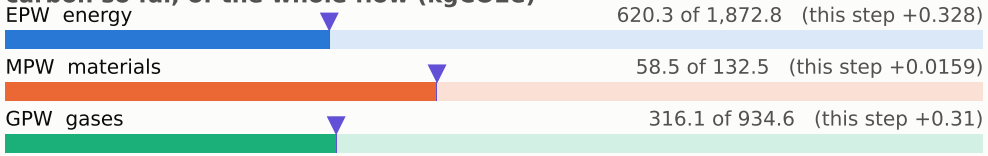

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

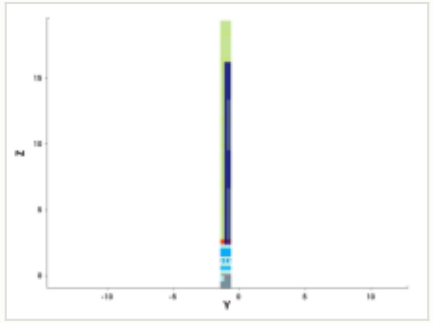

y cut at -1.035 µm

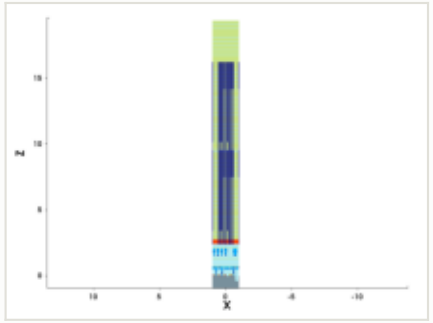

mask for this step

no mask for this step

steps by process area

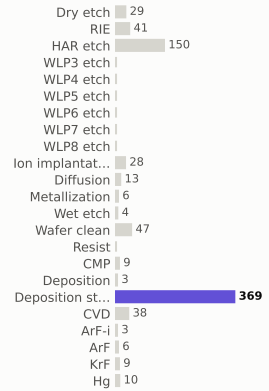

materials deposited (g)

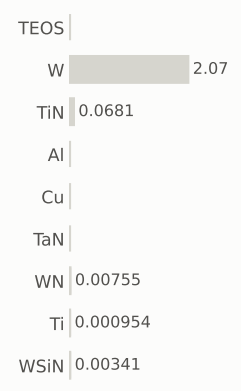

gases emitted (g)

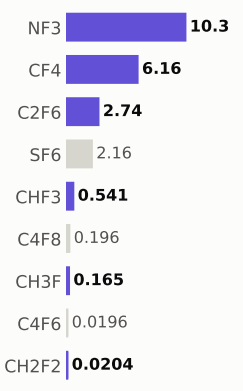

Step #9980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	995.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 620.6 of 1,872.8 (this step +0.328)

MPW materials — 58.5 of 132.5 (this step +0.0159)

GPW gases — 316.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

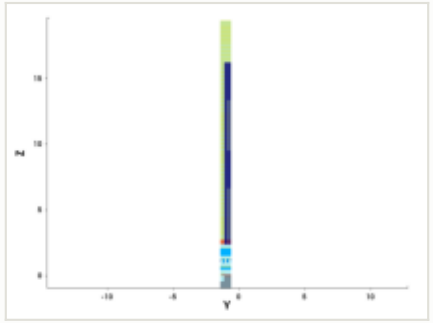

y cut at -1.035 µm

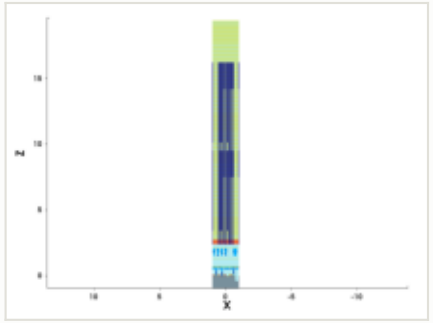

mask for this step

no mask for this step

steps by process area

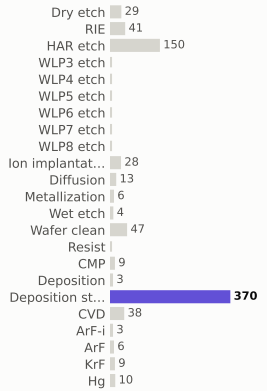

materials deposited (g)

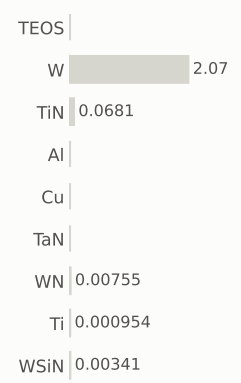

gases emitted (g)

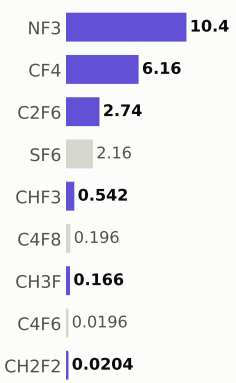

Step #9990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	996.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 620.9 of 1,872.8 (this step +0.328)

MPW materials — 58.5 of 132.5 (this step +0.0159)

GPW gases — 316.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

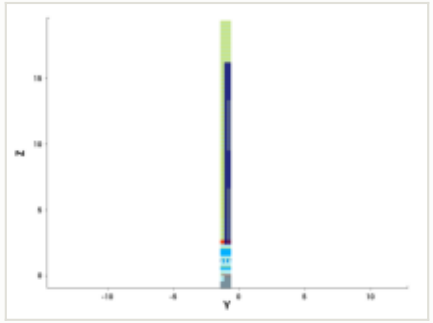

y cut at -1.035 µm

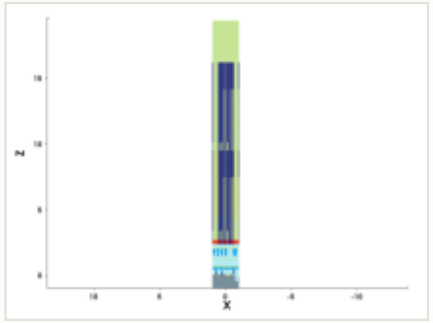

mask for this step

no mask for this step

steps by process area

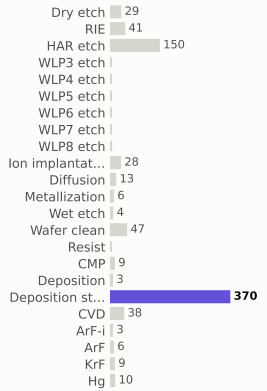

materials deposited (g)

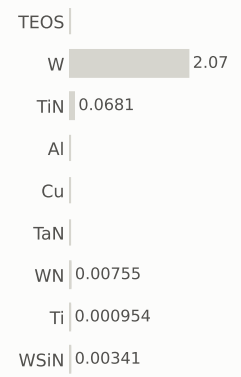

gases emitted (g)

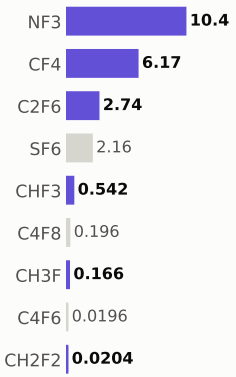

Step #10000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	996.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 621.2 of 1,872.8 (this step +0.328)

MPW materials — 58.5 of 132.5 (this step +0.0159)

GPW gases — 317.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

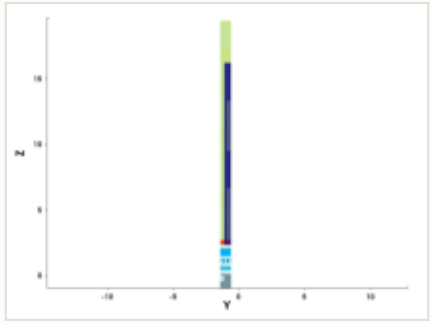

y cut at -1.035 µm

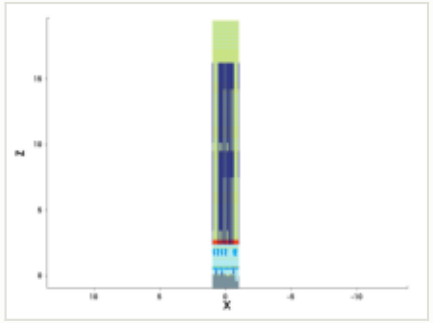

mask for this step

no mask for this step

steps by process area

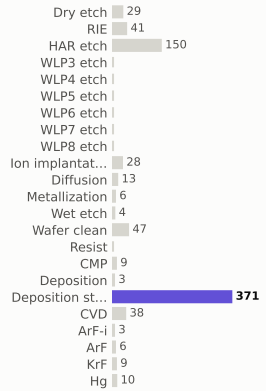

materials deposited (g)

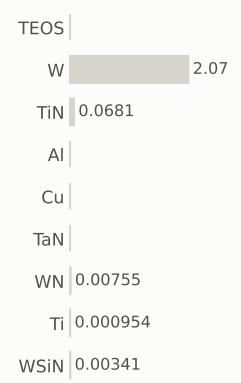

gases emitted (g)

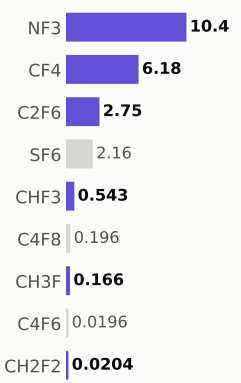

Step #10010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	997.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 621.6 of 1,872.8 (this step +0.328)

MPW materials — 58.5 of 132.5 (this step +0.0159)

GPW gases — 317.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

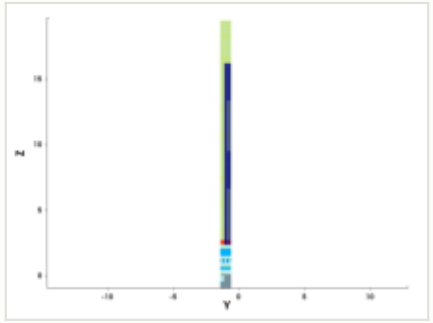

y cut at -1.035 µm

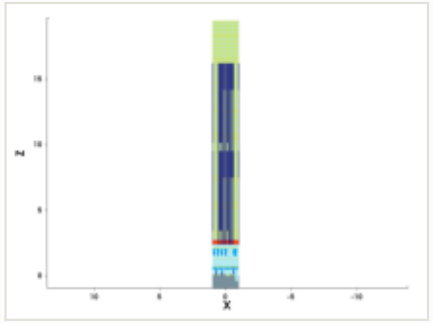

mask for this step

no mask for this step

steps by process area

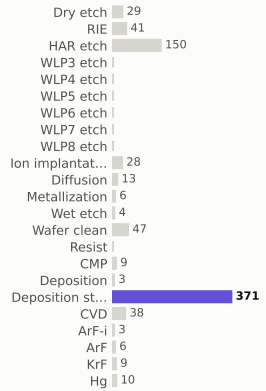

materials deposited (g)

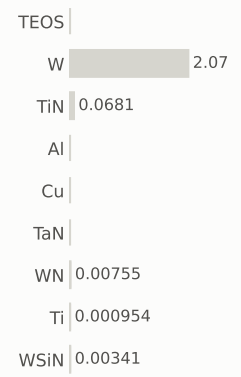

gases emitted (g)

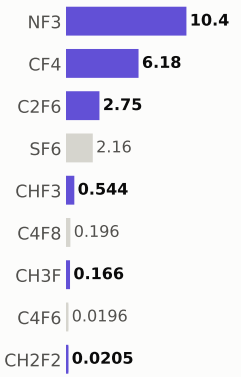

Step #10020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	998.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 621.9 of 1,872.8 (this step +0.328)

MPW materials — 58.6 of 132.5 (this step +0.0159)

GPW gases — 317.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

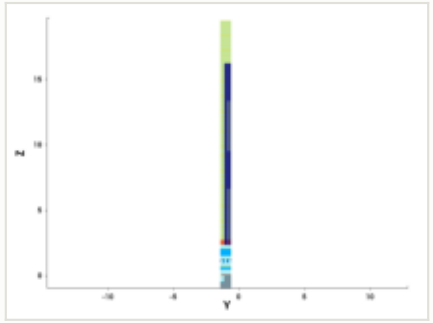

y cut at -1.035 µm

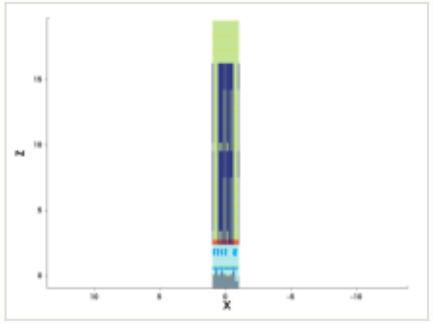

mask for this step

no mask for this step

steps by process area

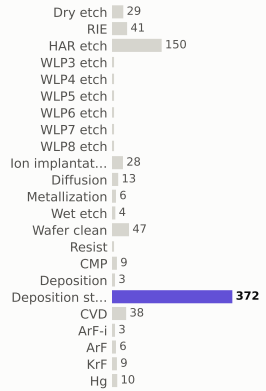

materials deposited (g)

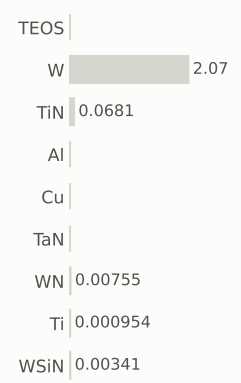

gases emitted (g)

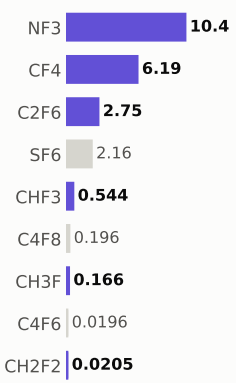

Step #10030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	998.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

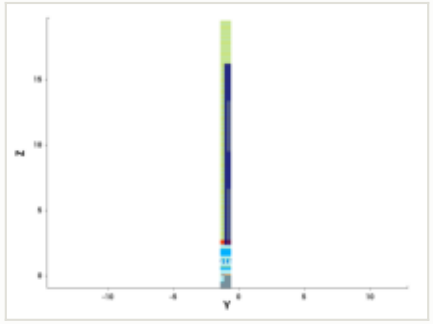

y cut at -1.035 µm

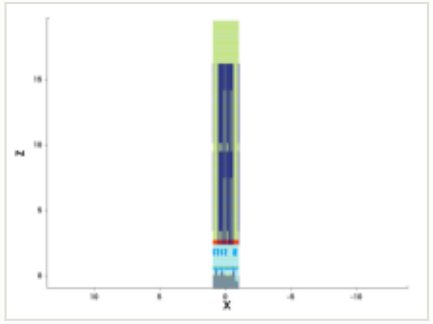

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 622.2 of 1,872.8 (this step +0.328)

MPW materials — 58.6 of 132.5 (this step +0.0159)

GPW gases — 318.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

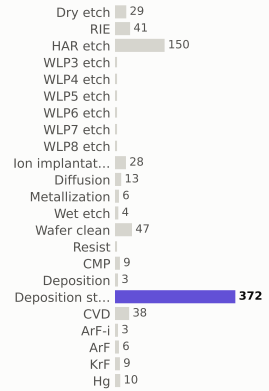

materials deposited (g)

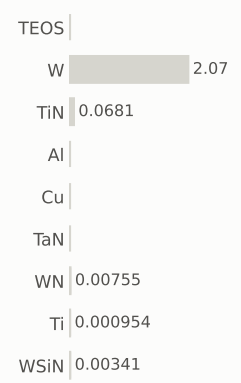

gases emitted (g)

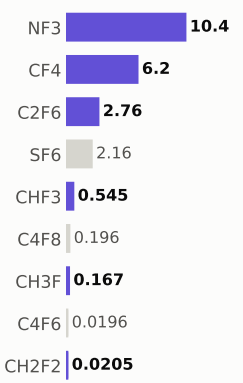

Step #10040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	999.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 622.6 of 1,872.8 (this step +0.328)

MPW materials — 58.6 of 132.5 (this step +0.0159)

GPW gases — 318.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

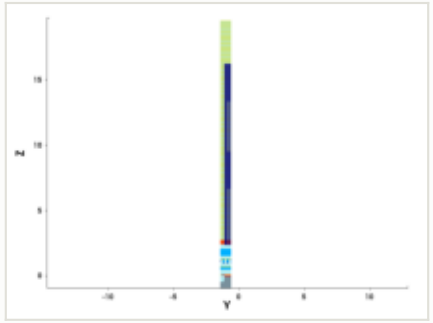

y cut at -1.035 µm

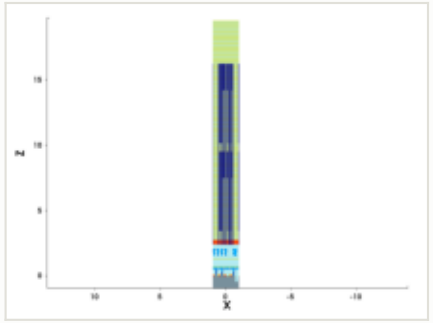

mask for this step

no mask for this step

steps by process area

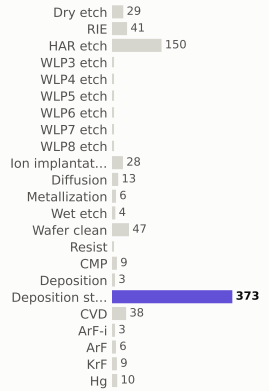

materials deposited (g)

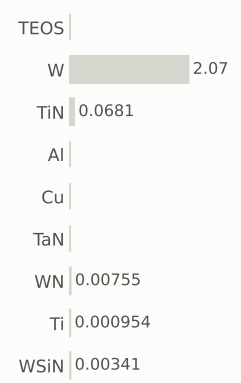

gases emitted (g)

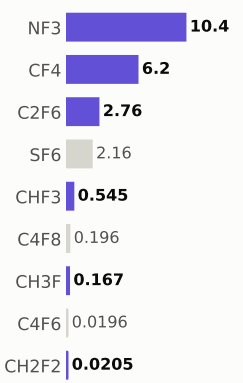

Step #10050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,000.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

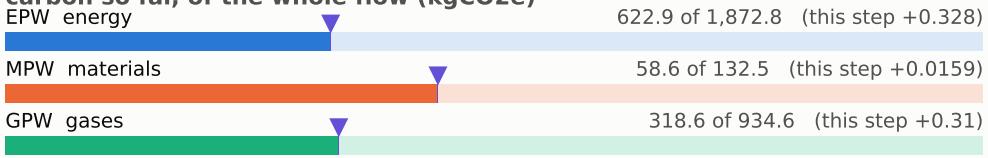

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

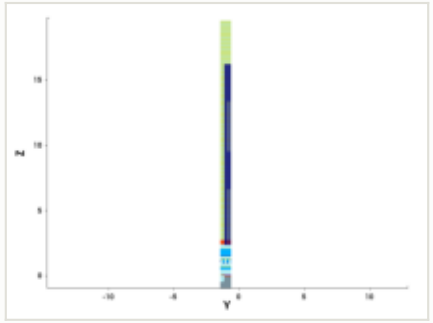

y cut at -1.035 µm

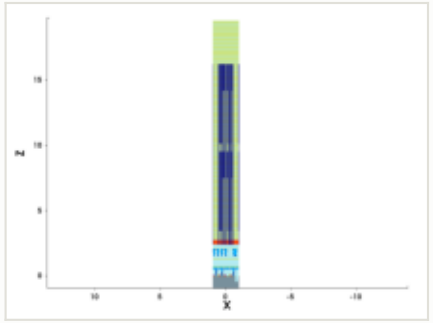

mask for this step

no mask for this step

steps by process area

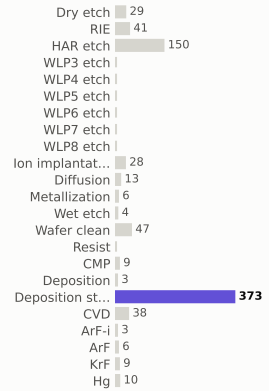

materials deposited (g)

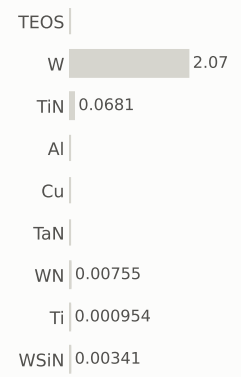

gases emitted (g)

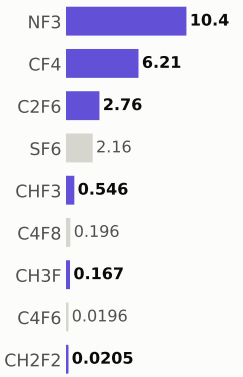

Step #10060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,000.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 623.2 of 1,872.8 (this step +0.328)

MPW materials — 58.6 of 132.5 (this step +0.0159)

GPW gases — 318.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

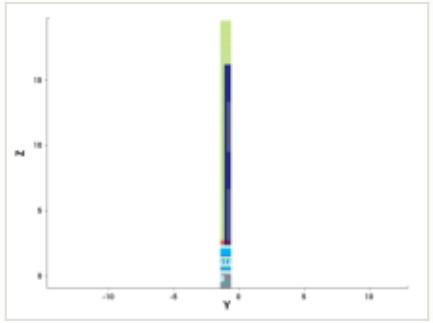

y cut at -1.035 µm

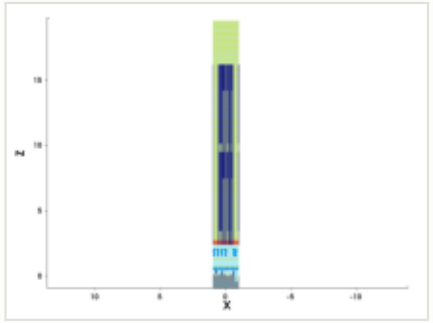

mask for this step

no mask for this step

steps by process area

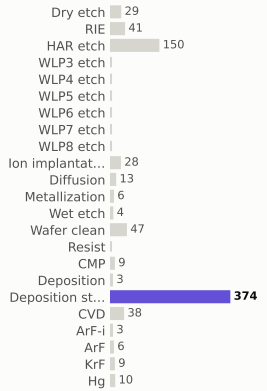

materials deposited (g)

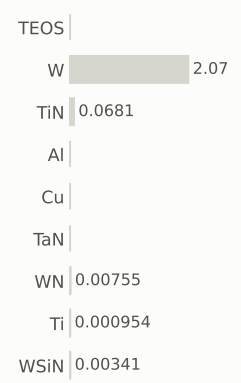

gases emitted (g)

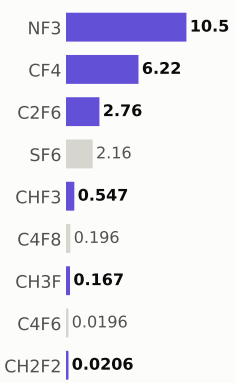

Step #10070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,001.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 623.5 of 1,872.8 (this step +0.328)

MPW materials — 58.6 of 132.5 (this step +0.0159)

GPW gases — 319.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

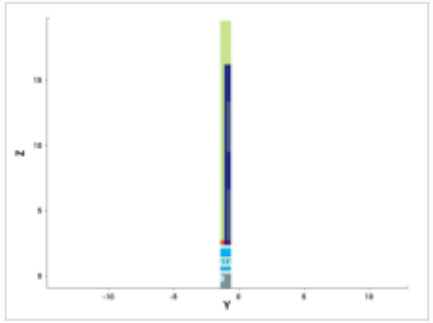

y cut at -1.035 µm

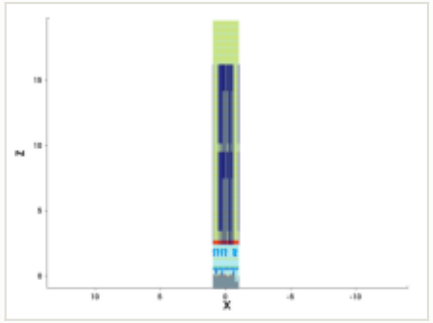

mask for this step

no mask for this step

steps by process area

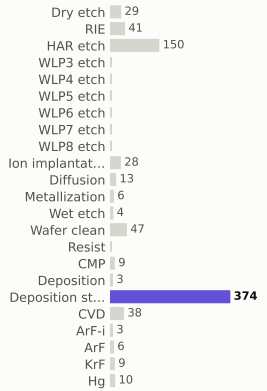

materials deposited (g)

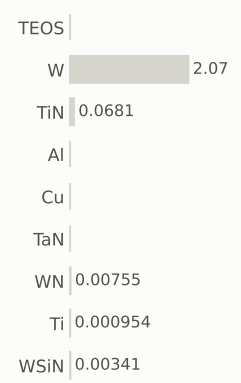

gases emitted (g)

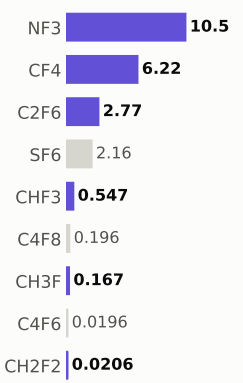

Step #10080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,002.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 623.9 of 1,872.8 (this step +0.328)

MPW materials — 58.7 of 132.5 (this step +0.0159)

GPW gases — 319.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

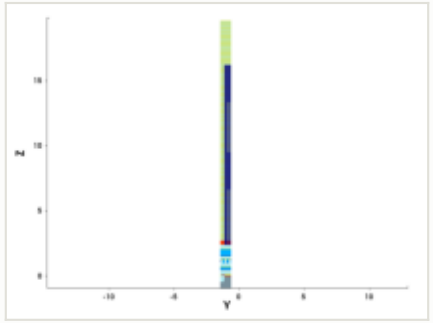

y cut at -1.035 µm

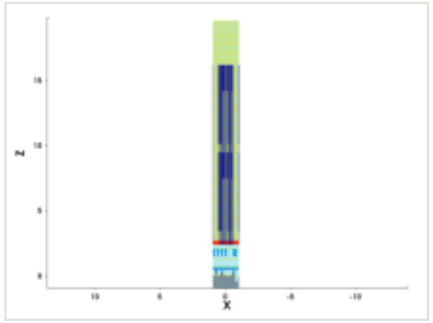

mask for this step

no mask for this step

steps by process area

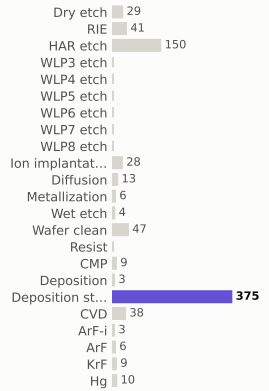

materials deposited (g)

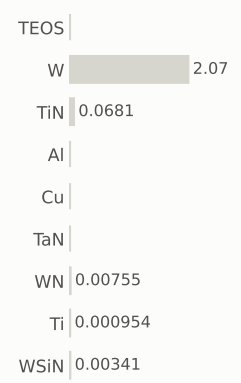

gases emitted (g)

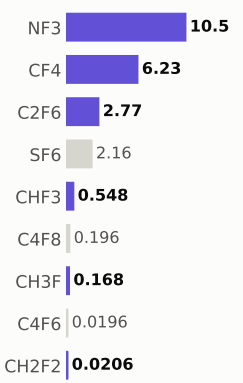

Step #10090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,002.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 624.2 of 1,872.8 (this step +0.328)

MPW materials — 58.7 of 132.5 (this step +0.0159)

GPW gases — 319.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

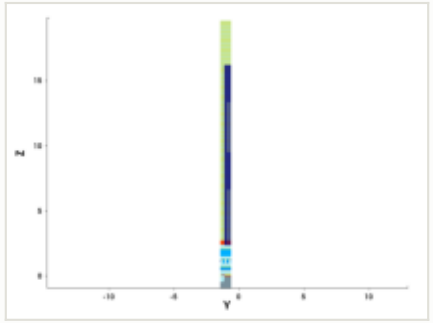

y cut at -1.035 µm

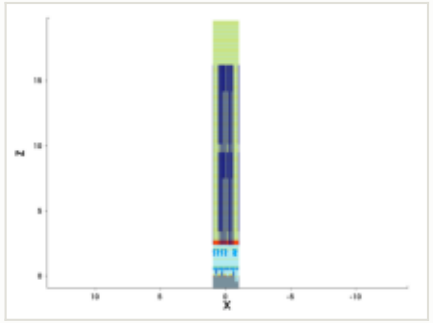

mask for this step

no mask for this step

steps by process area

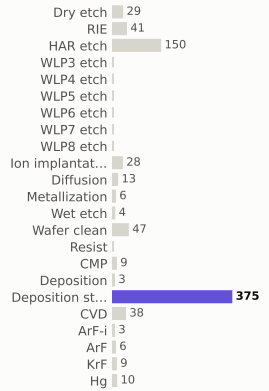

materials deposited (g)

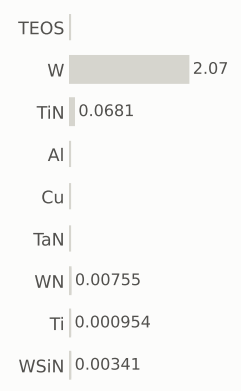

gases emitted (g)

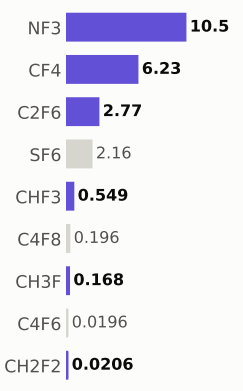

Step #10100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,003.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

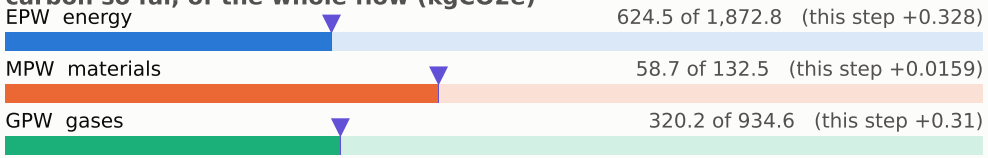

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

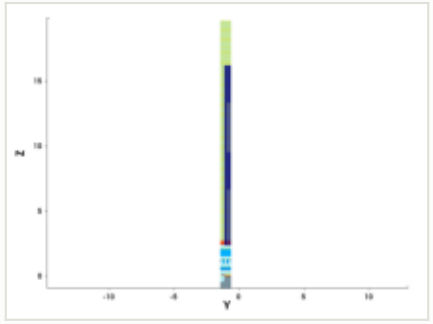

y cut at -1.035 µm

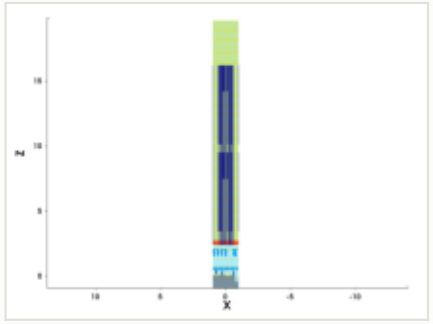

mask for this step

no mask for this step

steps by process area

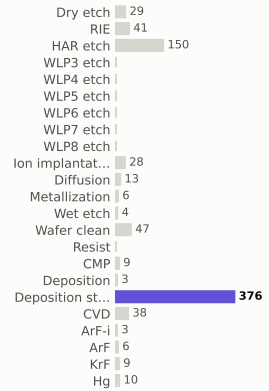

materials deposited (g)

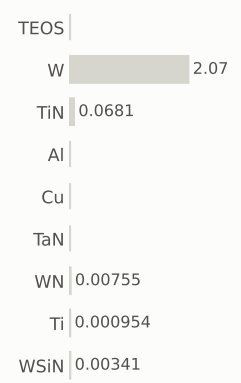

gases emitted (g)

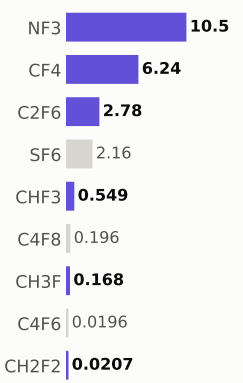

Step #10110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,004.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 624.9 of 1,872.8 (this step +0.328)

MPW materials — 58.7 of 132.5 (this step +0.0159)

GPW gases — 320.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

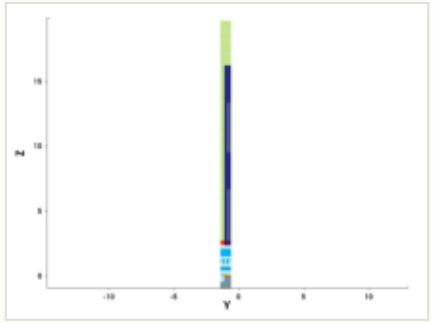

y cut at -1.035 µm

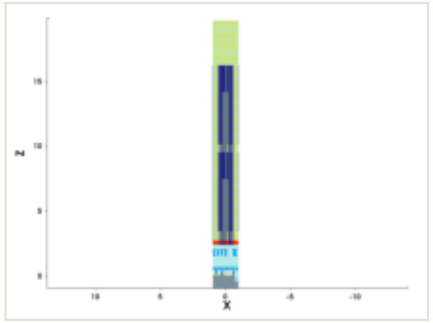

mask for this step

no mask for this step

steps by process area

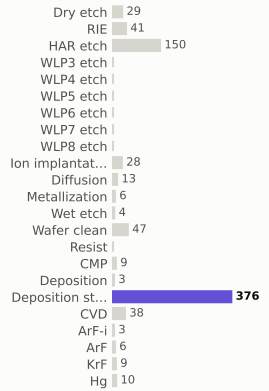

materials deposited (g)

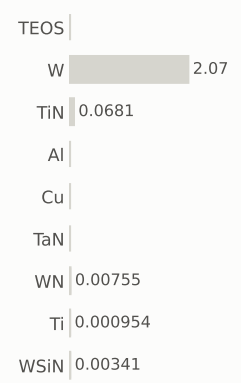

gases emitted (g)

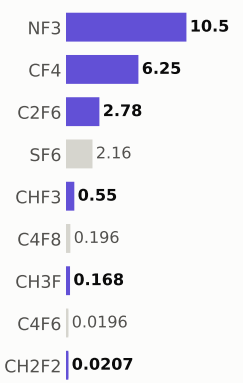

Step #10120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,004.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

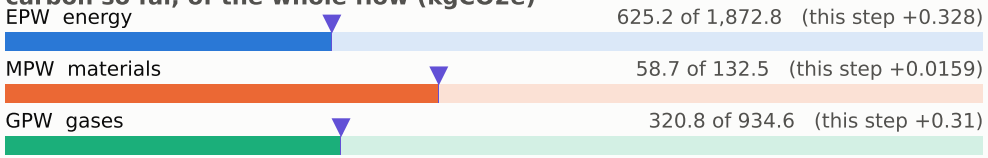

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

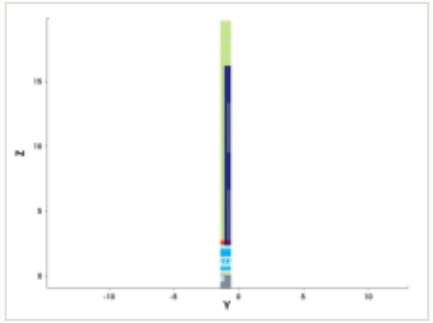

y cut at -1.035 µm

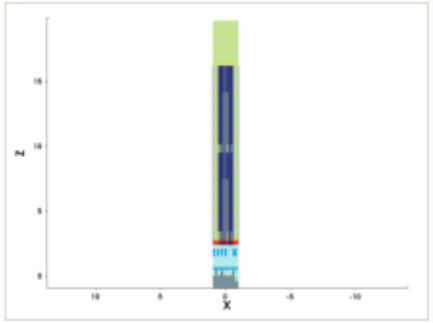

mask for this step

no mask for this step

steps by process area

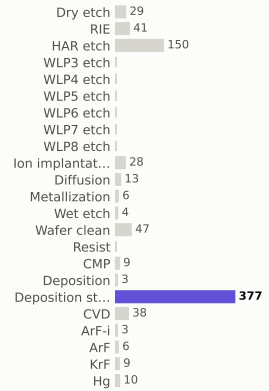

materials deposited (g)

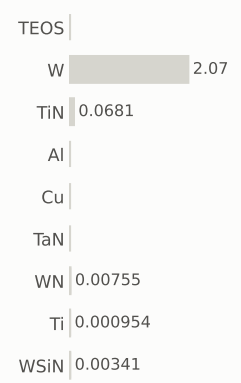

gases emitted (g)

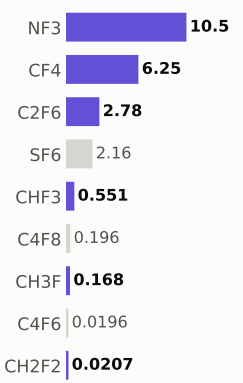

Step #10130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,005.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

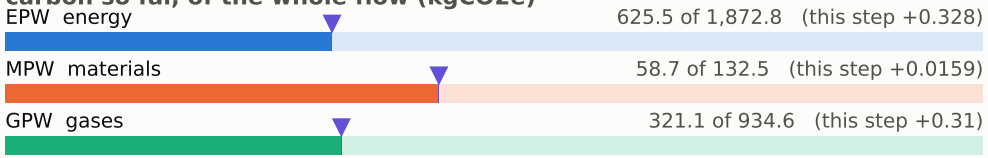

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

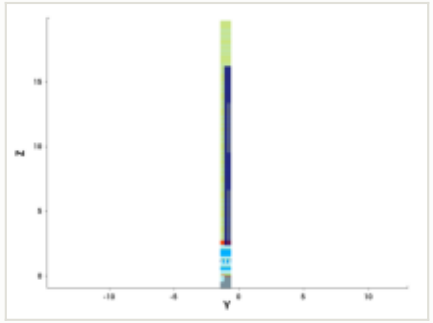

y cut at -1.035 µm

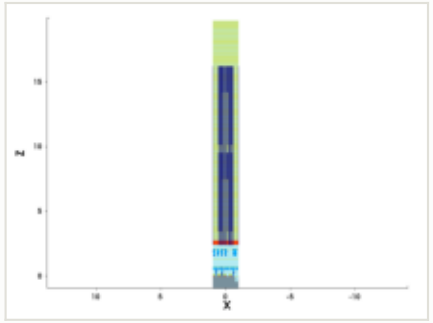

mask for this step

no mask for this step

steps by process area

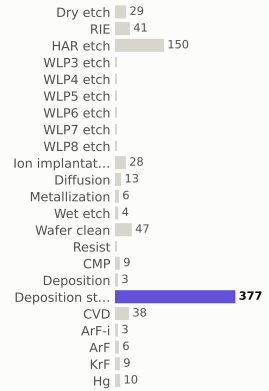

materials deposited (g)

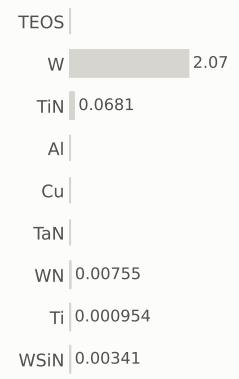

gases emitted (g)

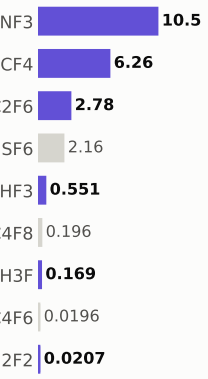

Step #10140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,006.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

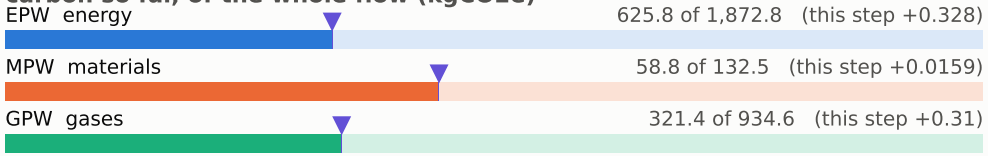

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

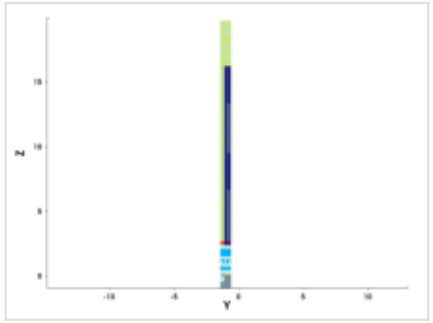

y cut at -1.035 µm

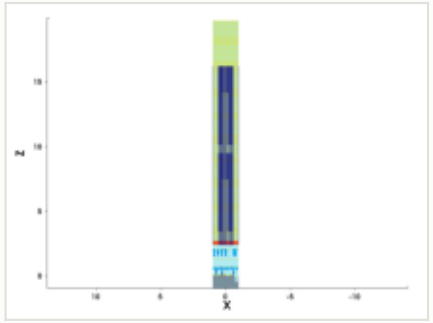

mask for this step

no mask for this step

steps by process area

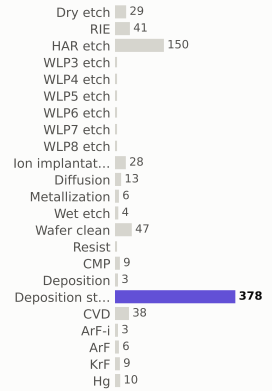

materials deposited (g)

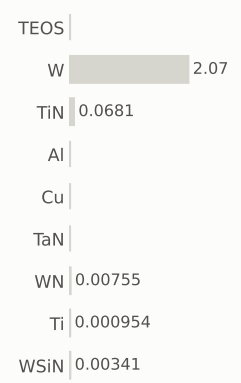

gases emitted (g)

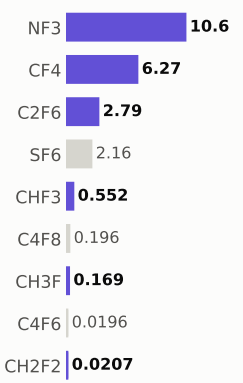

Step #10150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,006.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 626.2 of 1,872.8 (this step +0.328)

MPW materials — 58.8 of 132.5 (this step +0.0159)

GPW gases — 321.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

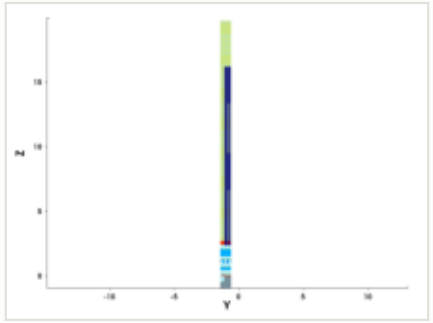

y cut at -1.035 µm

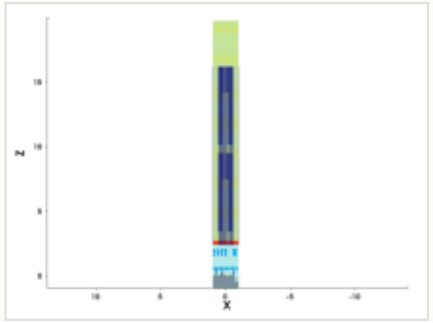

mask for this step

no mask for this step

steps by process area

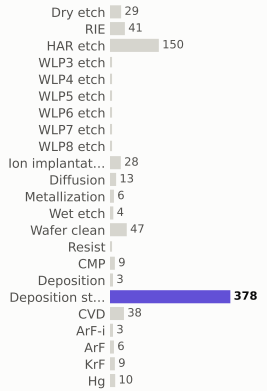

materials deposited (g)

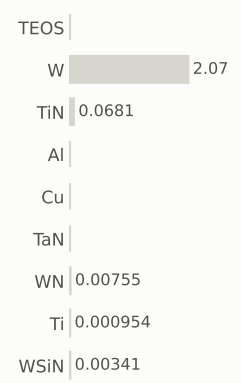

gases emitted (g)

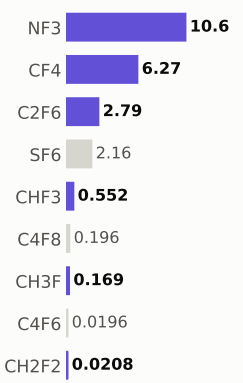

Step #10160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,007.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 626.5 of 1,872.8 (this step +0.328)

MPW materials — 58.8 of 132.5 (this step +0.0159)

GPW gases — 322.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

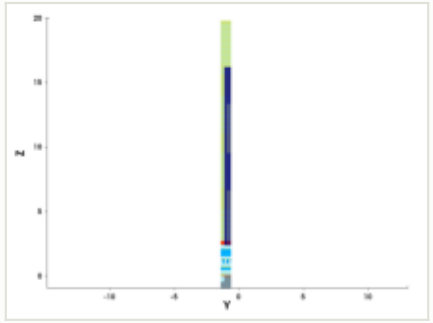

y cut at -1.035 µm

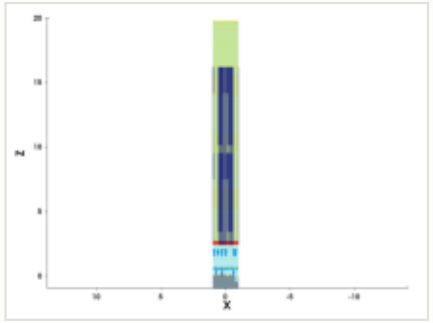

mask for this step

no mask for this step

steps by process area

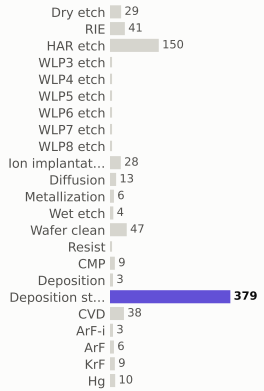

materials deposited (g)

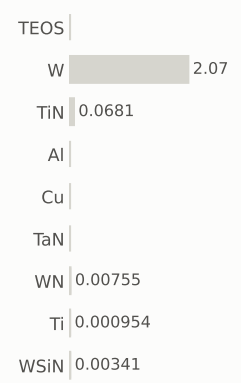

gases emitted (g)

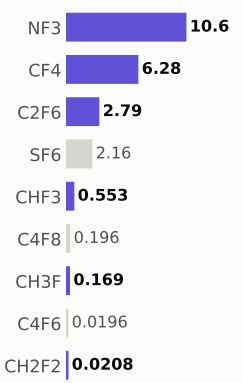

Step #10170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,007.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

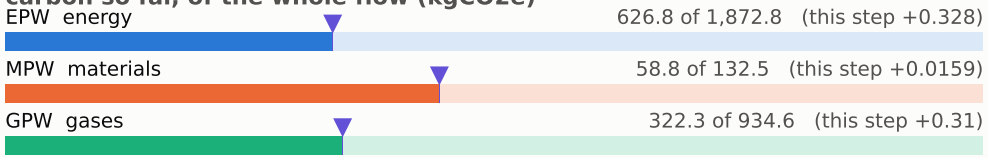

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

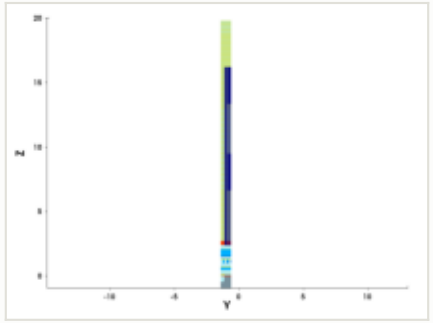

y cut at -1.035 µm

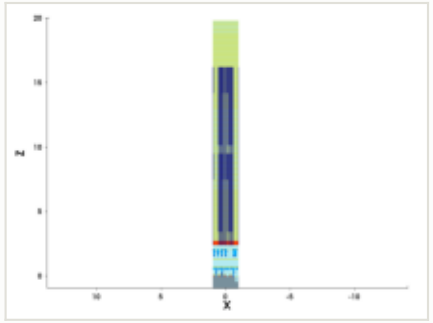

mask for this step

no mask for this step

steps by process area

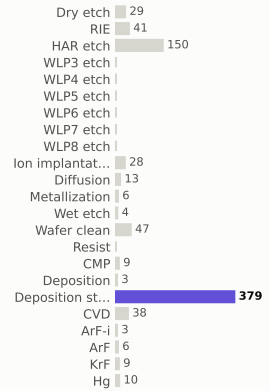

materials deposited (g)

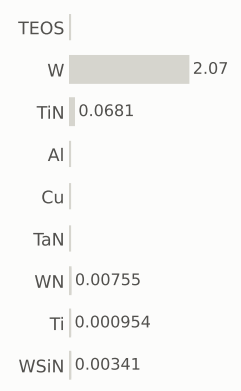

gases emitted (g)

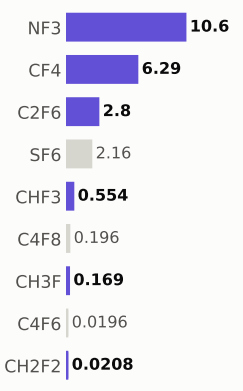

Step #10180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,008.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

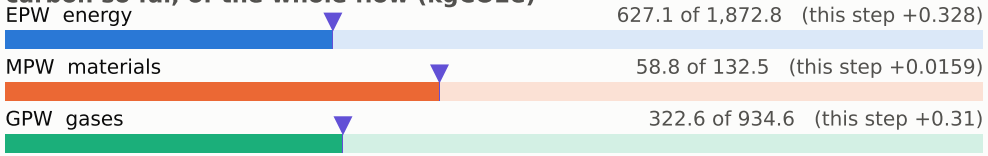

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

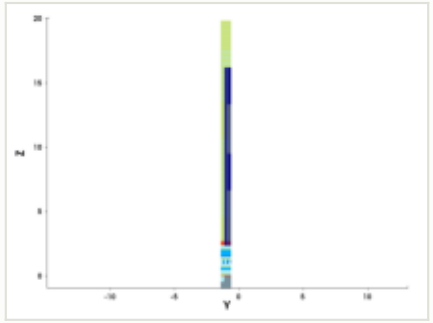

y cut at -1.035 µm

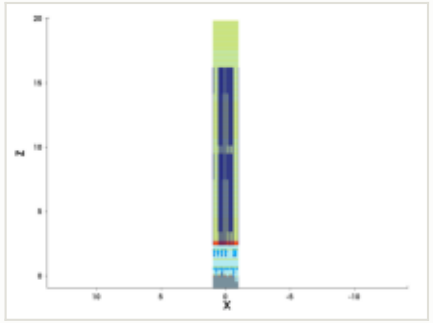

mask for this step

no mask for this step

steps by process area

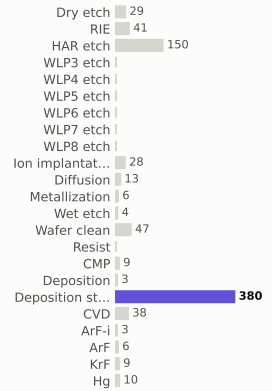

materials deposited (g)

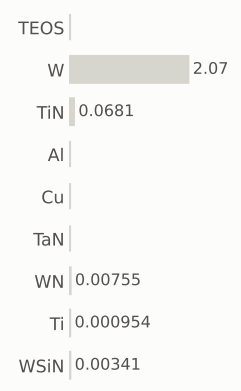

gases emitted (g)

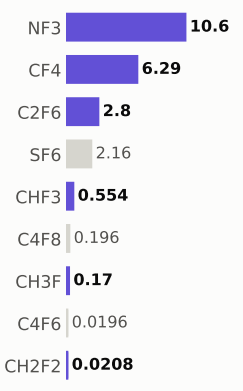

Step #10190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,009.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

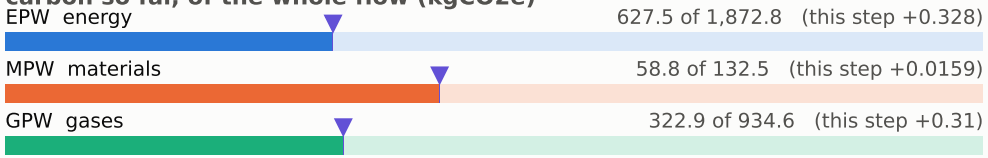

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

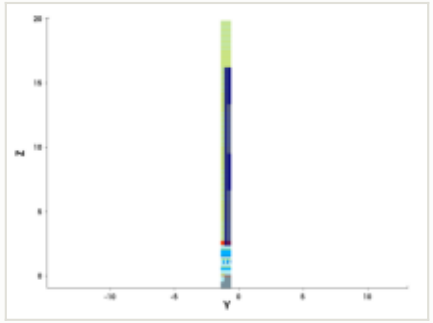

y cut at -1.035 µm

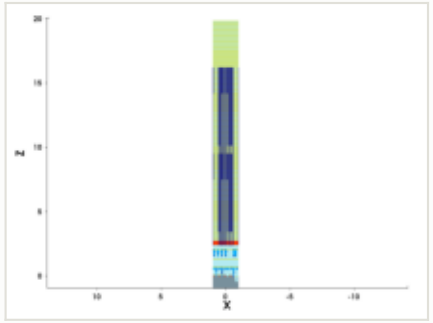

mask for this step

no mask for this step

steps by process area

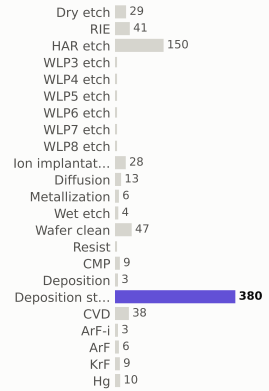

materials deposited (g)

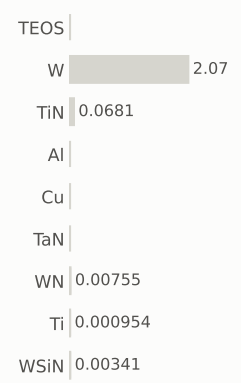

gases emitted (g)

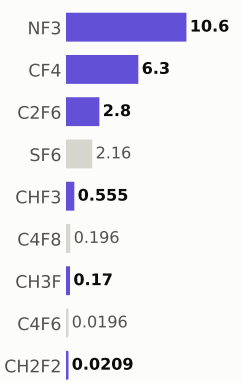

Step #10200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,009.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 627.8 of 1,872.8 (this step +0.328)

MPW materials — 58.9 of 132.5 (this step +0.0159)

GPW gases — 323.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

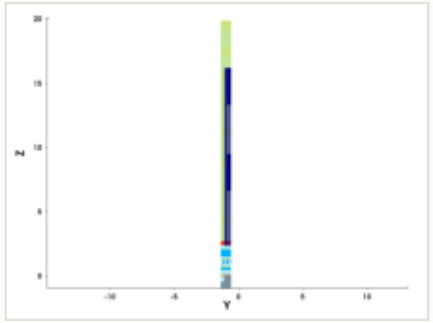

y cut at -1.035 µm

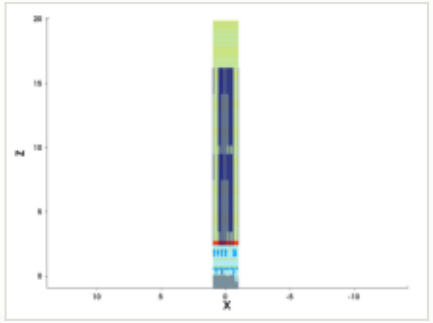

mask for this step

no mask for this step

steps by process area

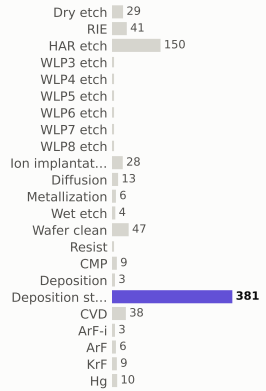

materials deposited (g)

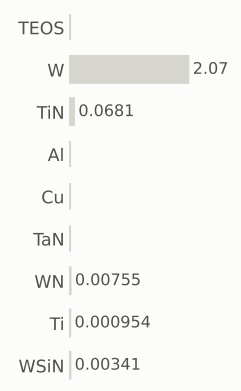

gases emitted (g)

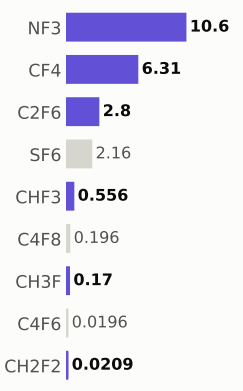

Step #10210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,010.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

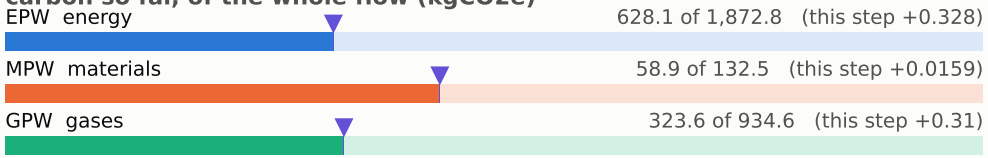

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

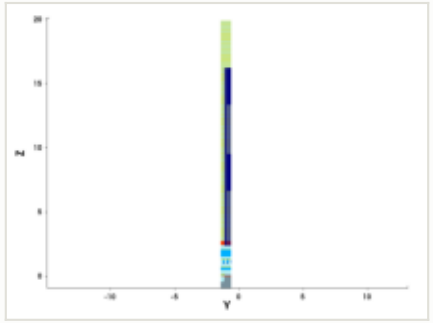

y cut at -1.035 µm

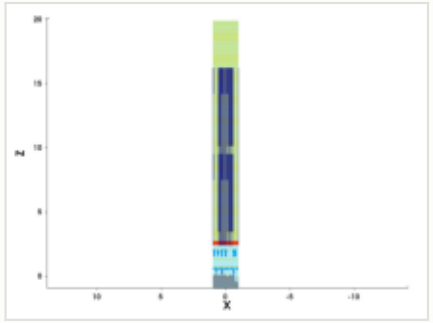

mask for this step

no mask for this step

steps by process area

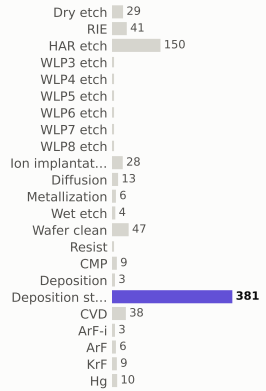

materials deposited (g)

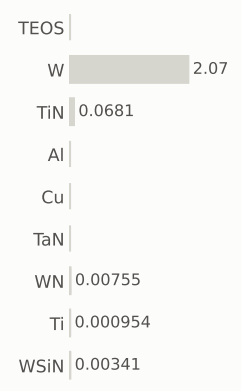

gases emitted (g)

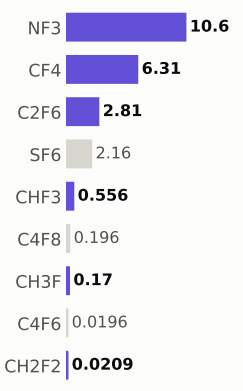

Step #10220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,011.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 628.5 of 1,872.8 (this step +0.328)

MPW materials — 58.9 of 132.5 (this step +0.0159)

GPW gases — 323.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

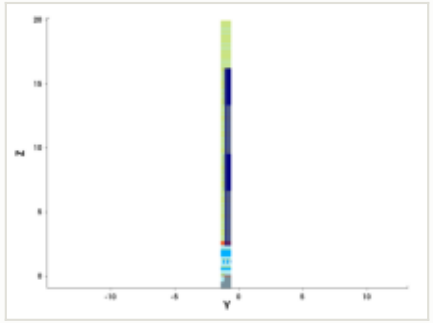

y cut at -1.035 µm

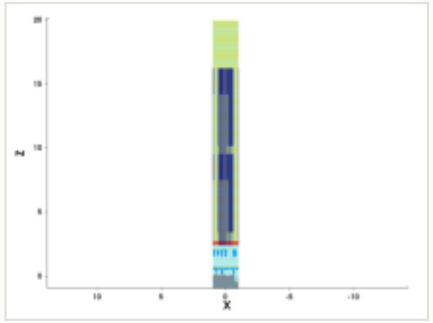

mask for this step

no mask for this step

steps by process area

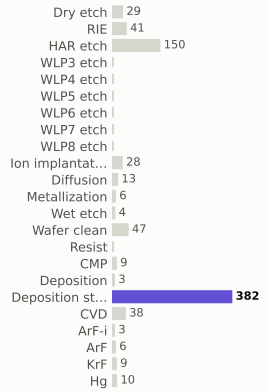

materials deposited (g)

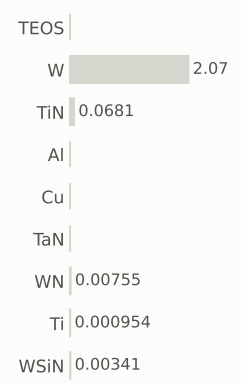

gases emitted (g)

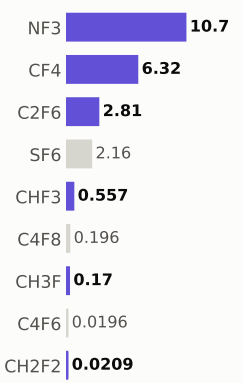

Step #10230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,011.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

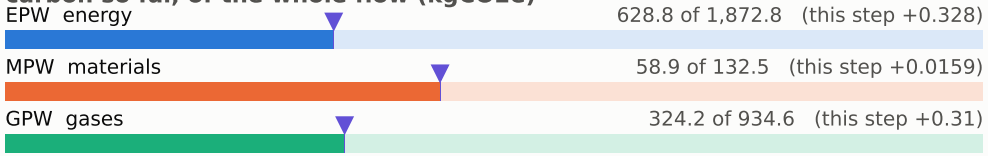

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

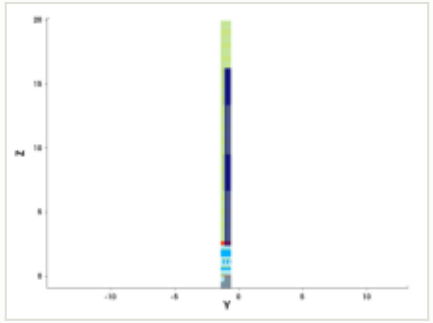

y cut at -1.035 µm

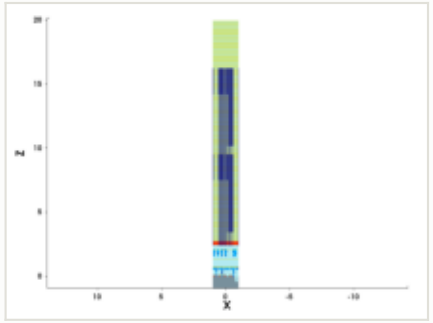

mask for this step

no mask for this step

steps by process area

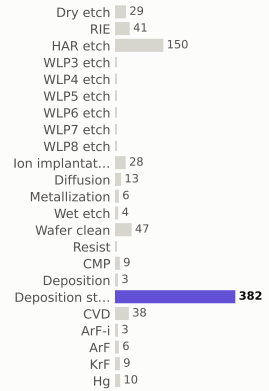

materials deposited (g)

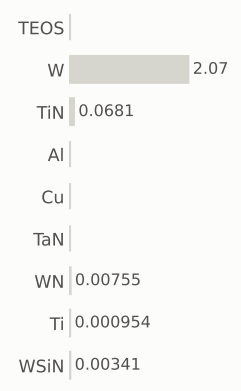

gases emitted (g)

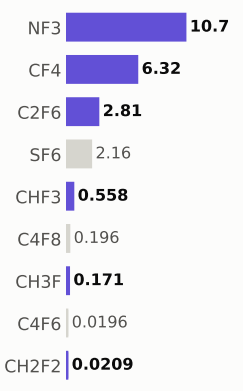

Step #10240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,012.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

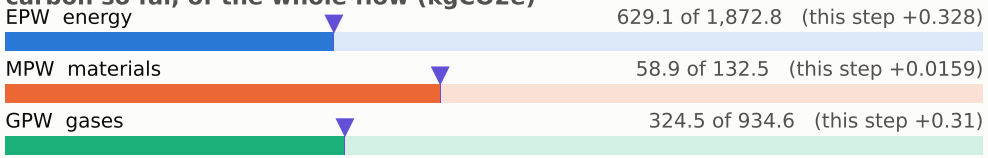

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

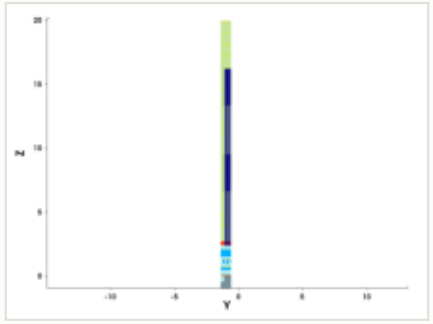

y cut at -1.035 µm

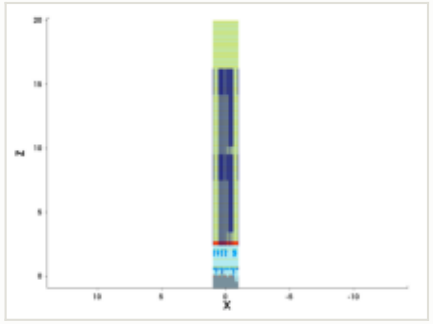

mask for this step

no mask for this step

steps by process area

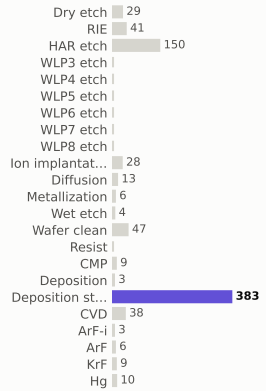

materials deposited (g)

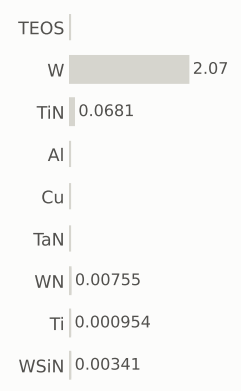

gases emitted (g)

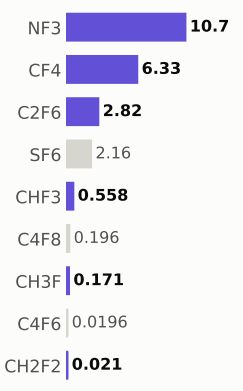

Step #10250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,013.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 629.4 of 1,872.8 (this step +0.328)

MPW materials — 58.9 of 132.5 (this step +0.0159)

GPW gases — 324.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

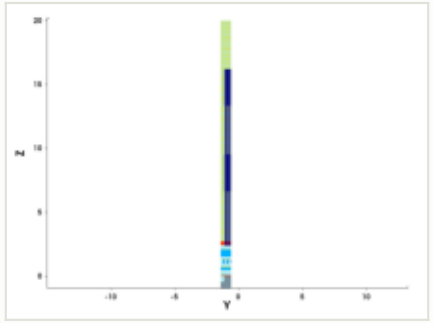

y cut at -1.035 µm

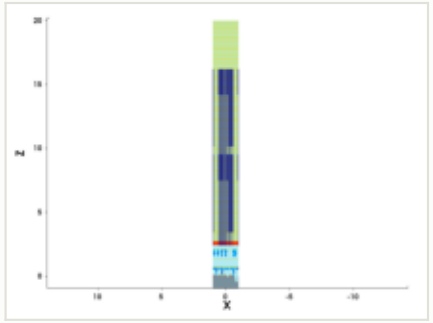

mask for this step

no mask for this step

steps by process area

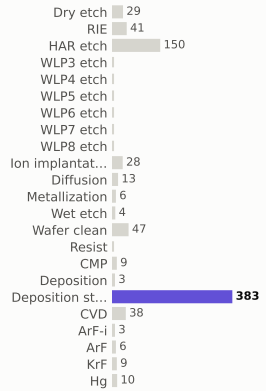

materials deposited (g)

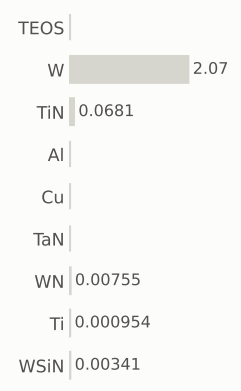

gases emitted (g)

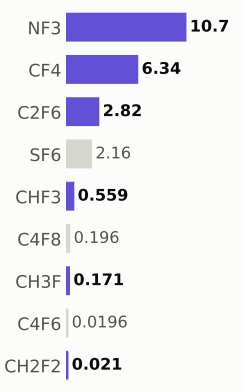

Step #10260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,013.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

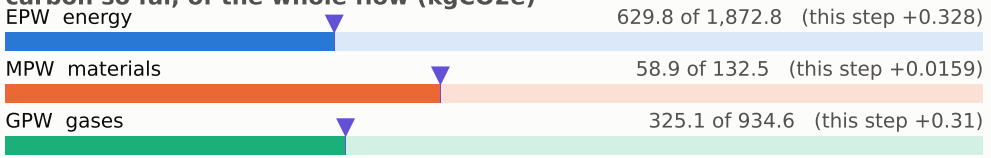

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

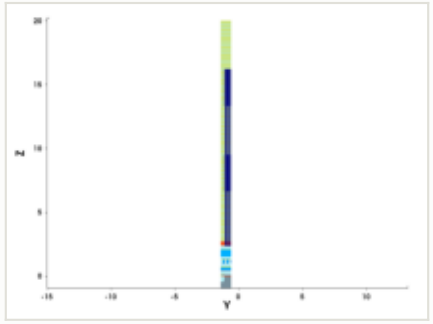

y cut at -1.035 µm

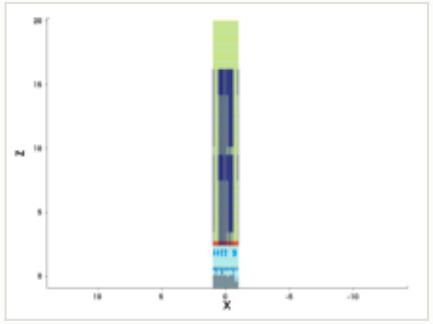

mask for this step

no mask for this step

steps by process area

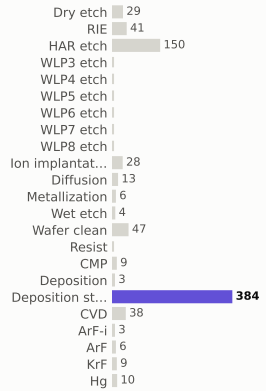

materials deposited (g)

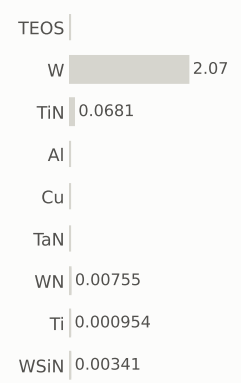

gases emitted (g)

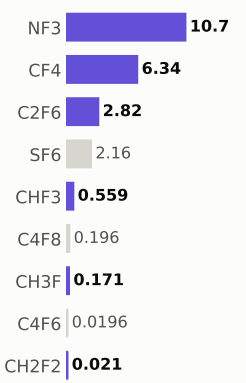

Step #10270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,014.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

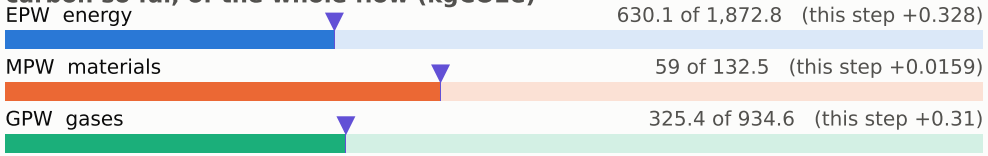

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

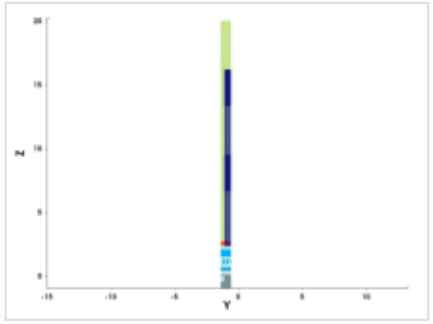

y cut at -1.035 µm

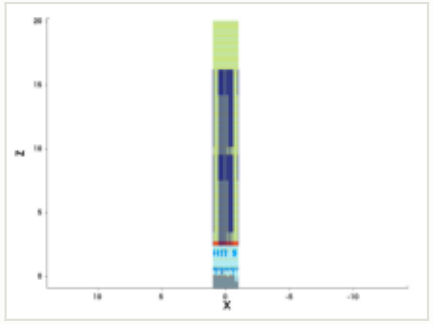

mask for this step

no mask for this step

steps by process area

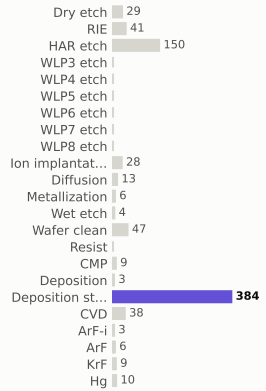

materials deposited (g)

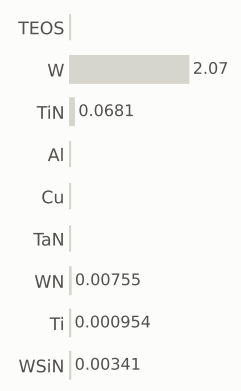

gases emitted (g)

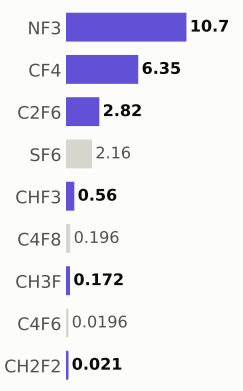

Step #10280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,015.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

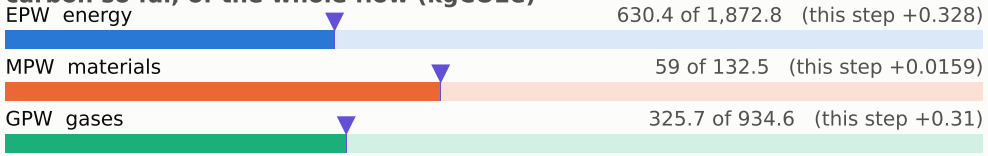

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

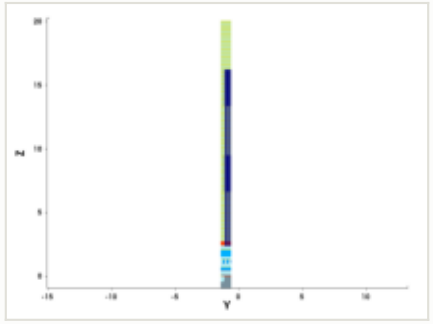

y cut at -1.035 µm

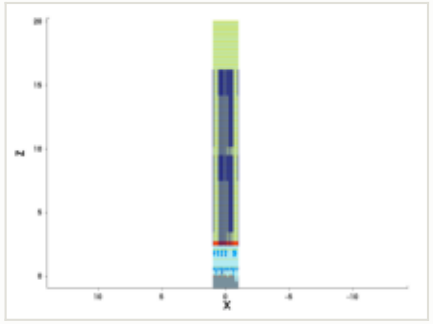

mask for this step

no mask for this step

steps by process area

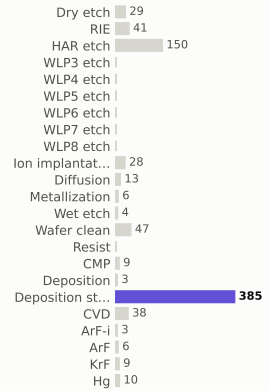

materials deposited (g)

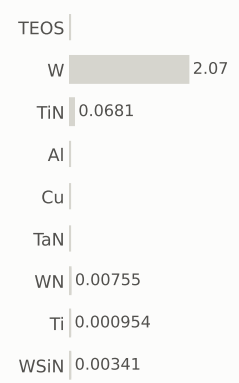

gases emitted (g)

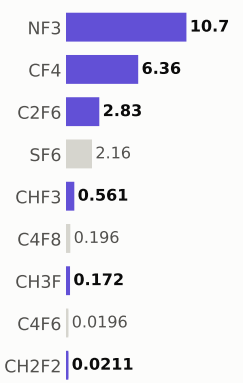

Step #10290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,015.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

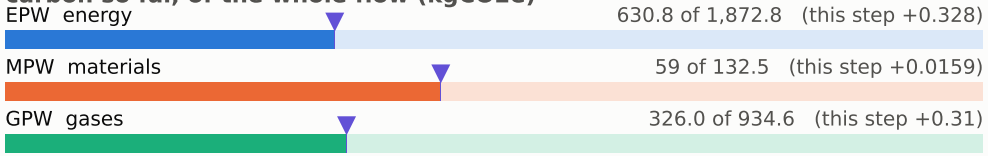

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

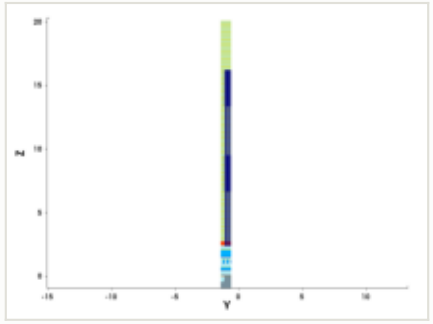

y cut at -1.035 µm

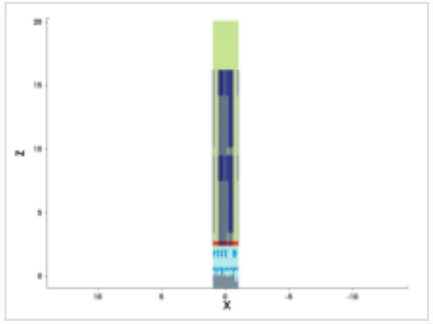

mask for this step

no mask for this step

steps by process area

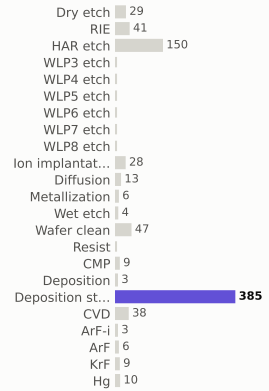

materials deposited (g)

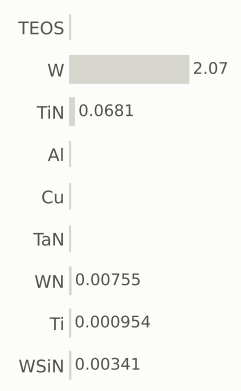

gases emitted (g)

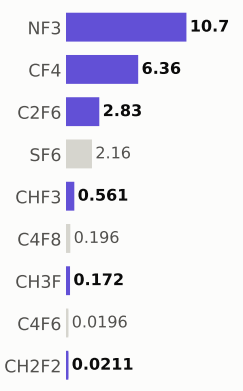

Step #10300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,016.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

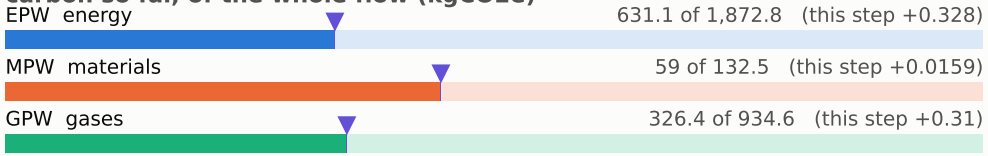

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

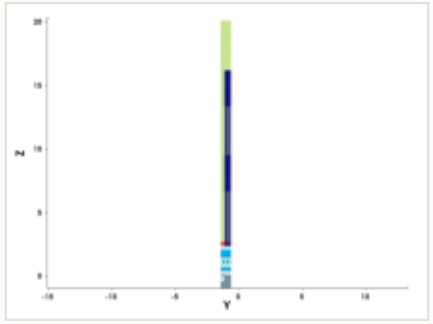

y cut at -1.035 µm

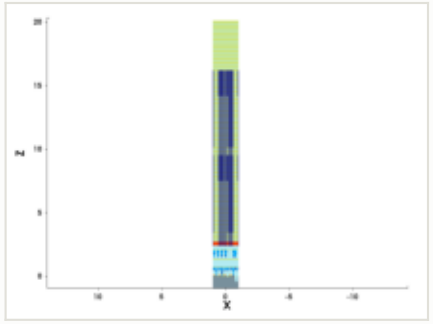

mask for this step

no mask for this step

steps by process area

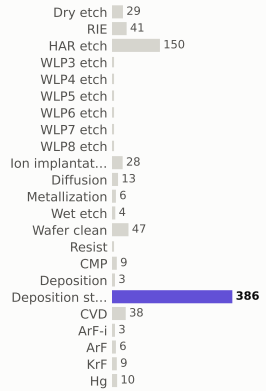

materials deposited (g)

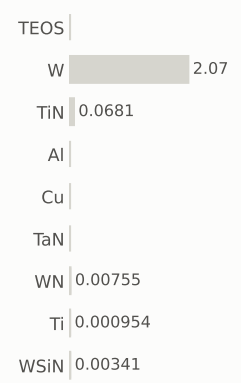

gases emitted (g)

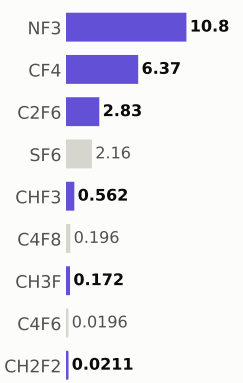

Step #10310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,017.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

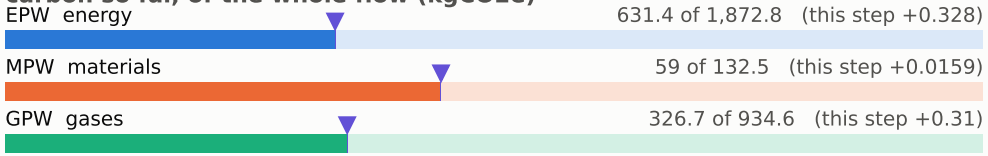

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

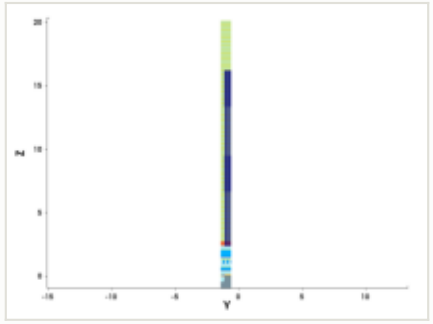

y cut at -1.035 µm

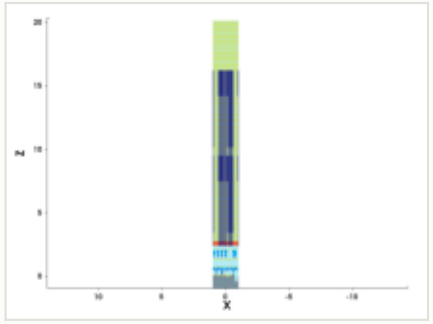

mask for this step

no mask for this step

steps by process area

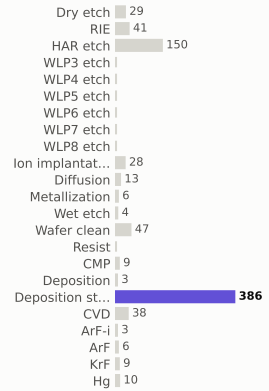

materials deposited (g)

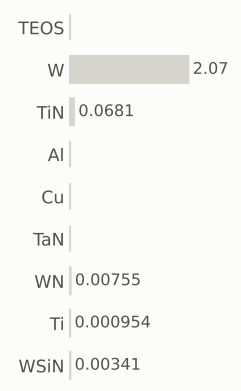

gases emitted (g)

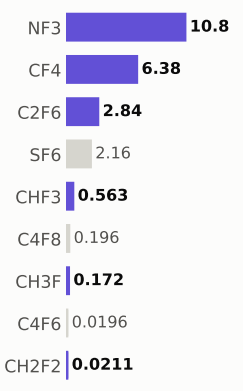

Step #10320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,017.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

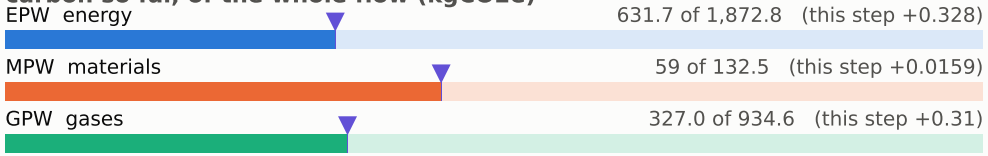

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

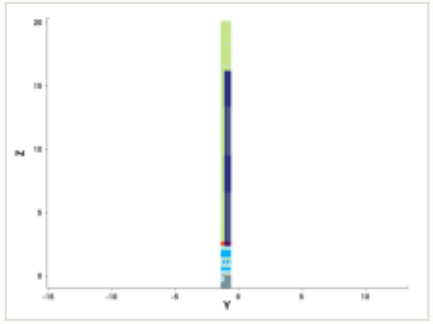

y cut at -1.035 µm

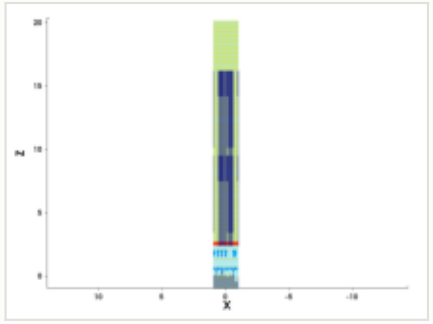

mask for this step

no mask for this step

steps by process area

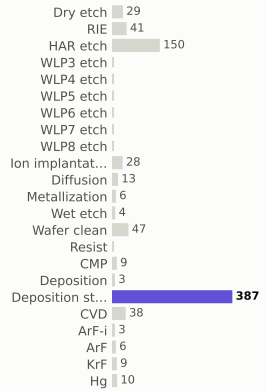

materials deposited (g)

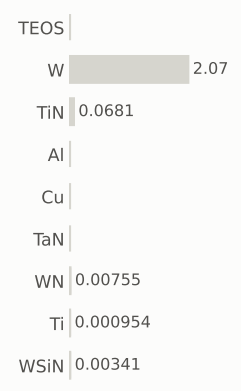

gases emitted (g)

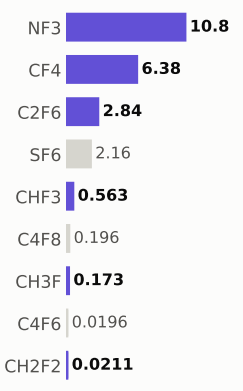

Step #10330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,018.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

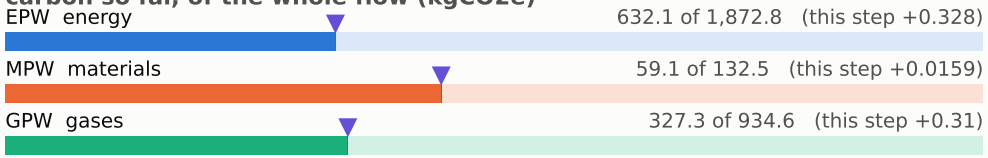

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

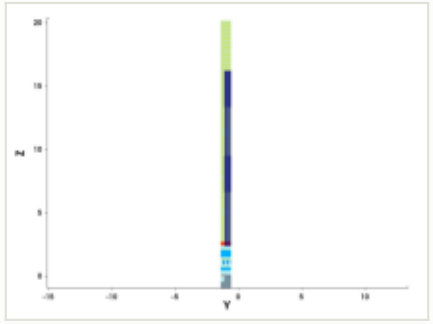

y cut at -1.035 µm

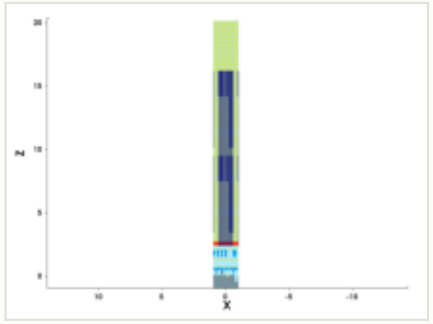

mask for this step

no mask for this step

steps by process area

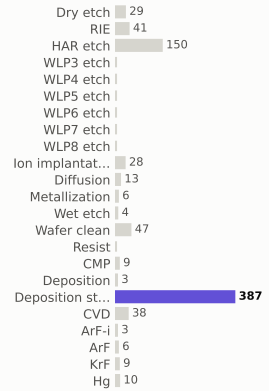

materials deposited (g)

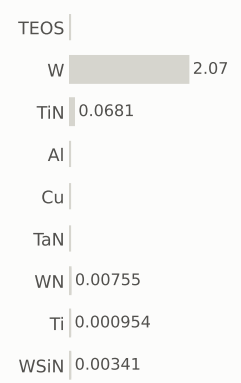

gases emitted (g)

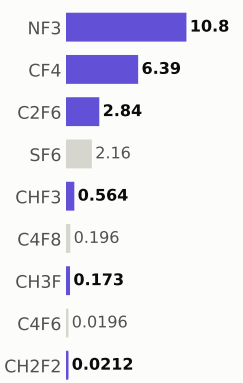

Step #10340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,019.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

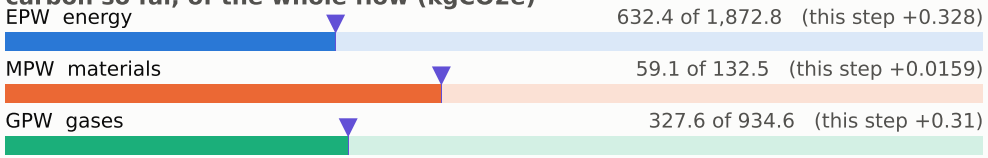

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

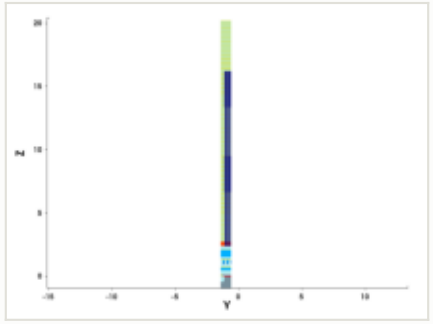

y cut at -1.035 µm

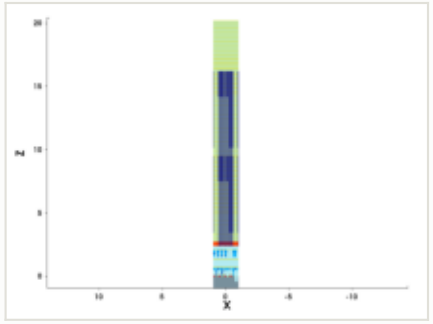

mask for this step

no mask for this step

steps by process area

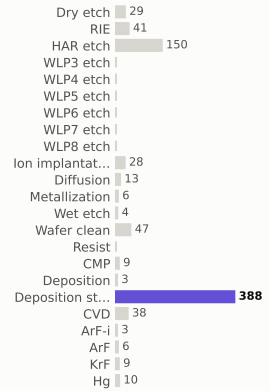

materials deposited (g)

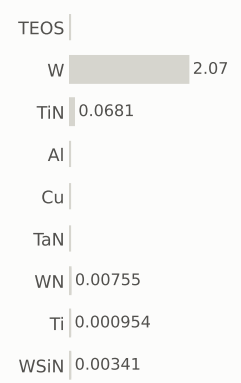

gases emitted (g)

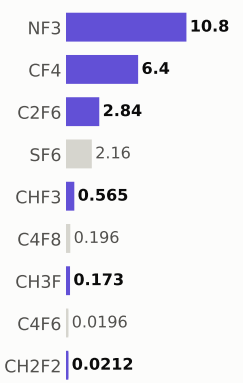

Step #10350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,019.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

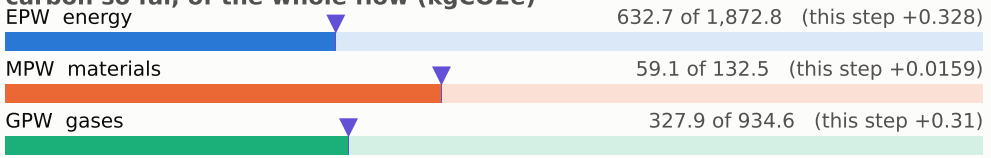

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

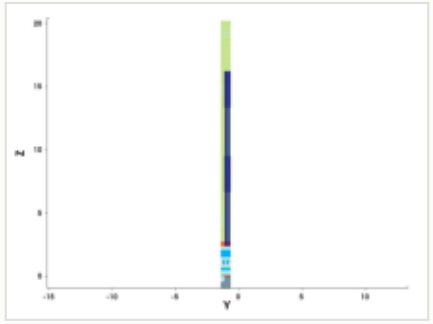

y cut at -1.035 µm

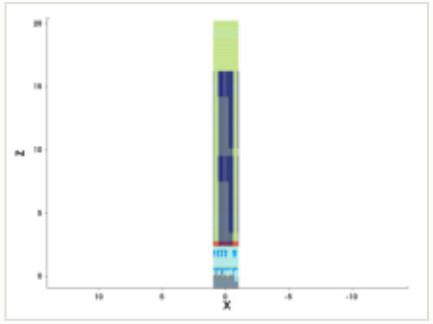

mask for this step

no mask for this step

steps by process area

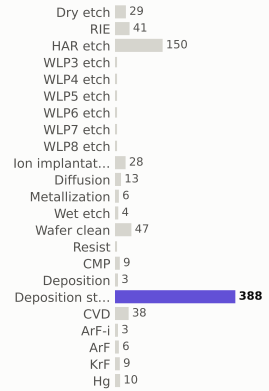

materials deposited (g)

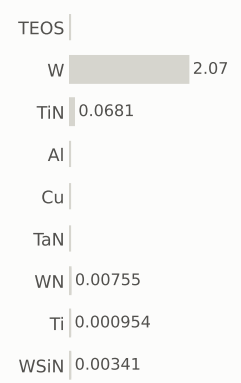

gases emitted (g)

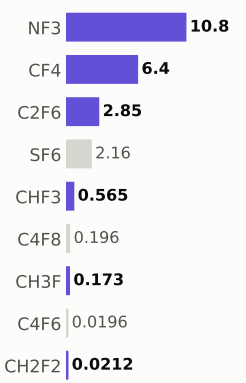

Step #10360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,020.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

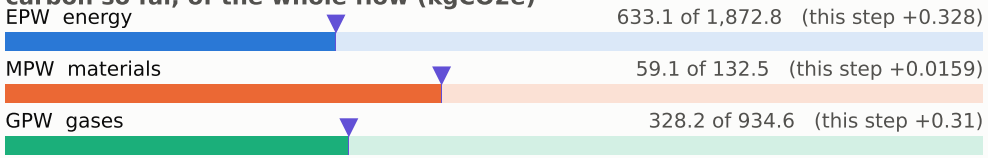

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

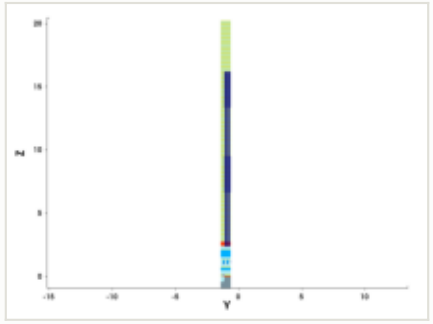

y cut at -1.035 µm

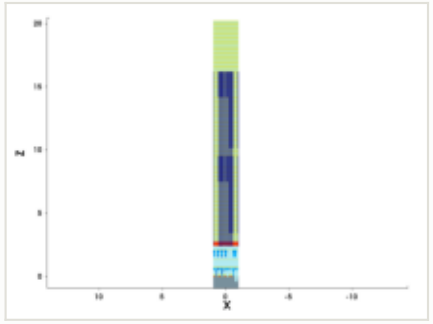

mask for this step

no mask for this step

steps by process area

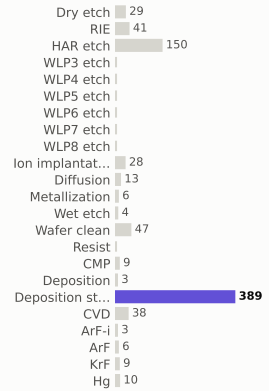

materials deposited (g)

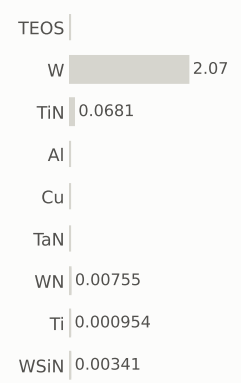

gases emitted (g)

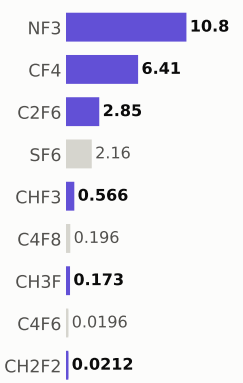

Step #10370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,021.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

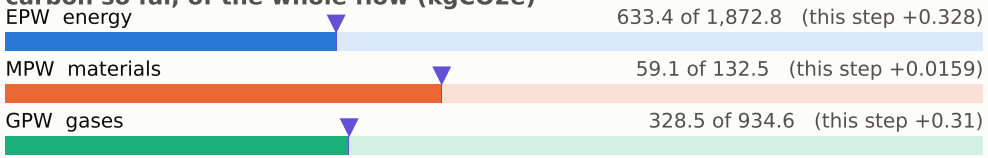

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

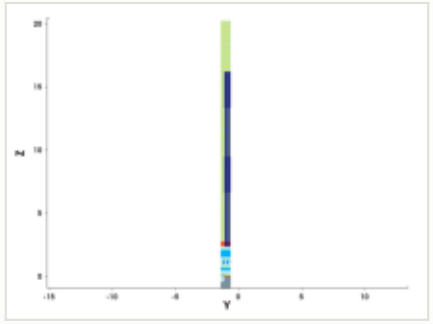

y cut at -1.035 µm

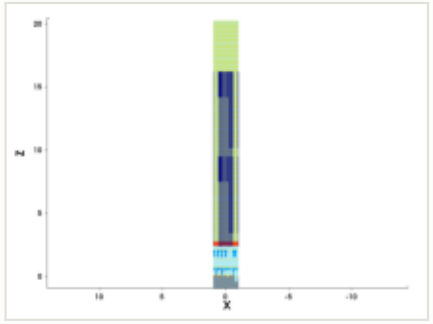

mask for this step

no mask for this step

steps by process area

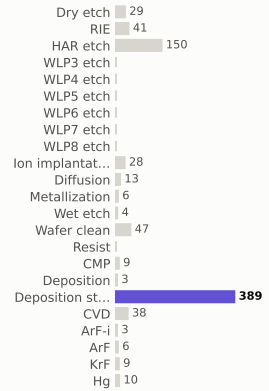

materials deposited (g)

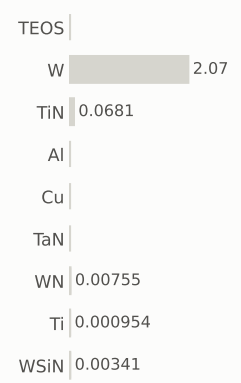

gases emitted (g)

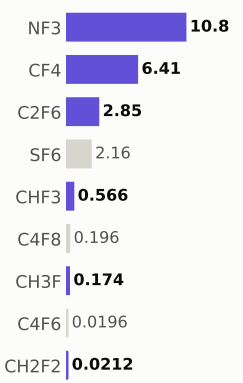

Step #10380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,021.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 633.7 of 1,872.8 (this step +0.328)

MPW materials — 59.1 of 132.5 (this step +0.0159)

GPW gases — 328.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

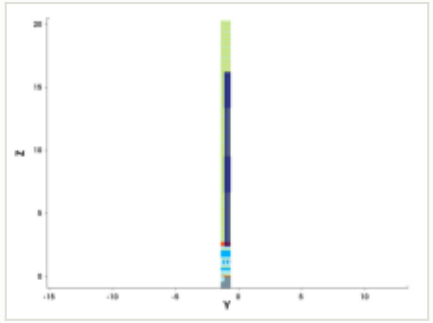

y cut at -1.035 µm

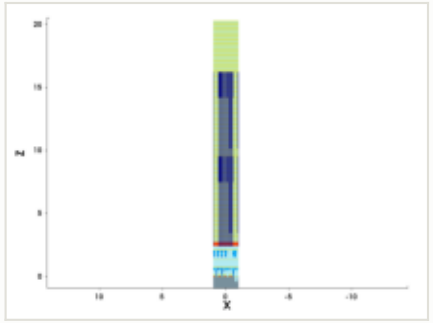

mask for this step

no mask for this step

steps by process area

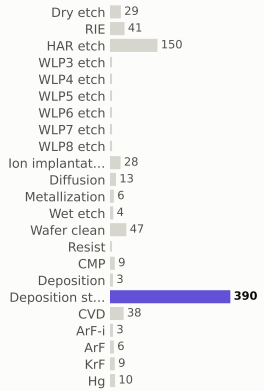

materials deposited (g)

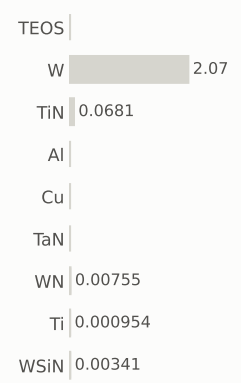

gases emitted (g)

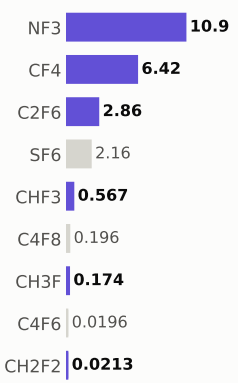

Step #10390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,022.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

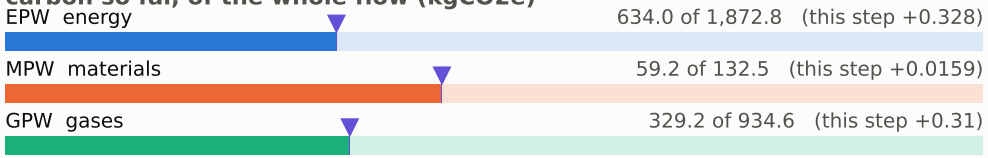

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

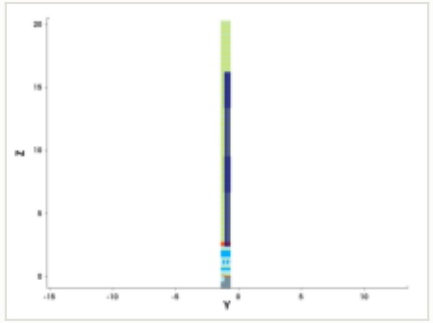

y cut at -1.035 µm

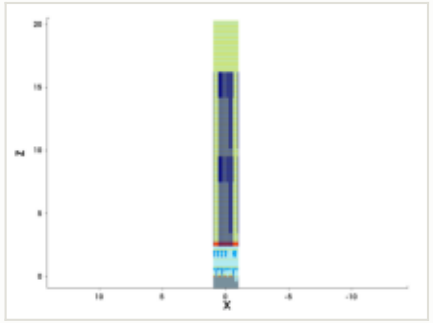

mask for this step

no mask for this step

steps by process area

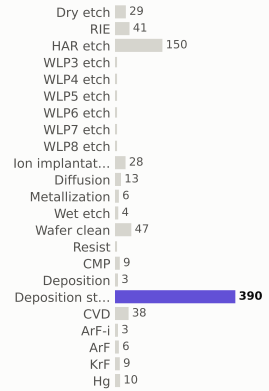

materials deposited (g)

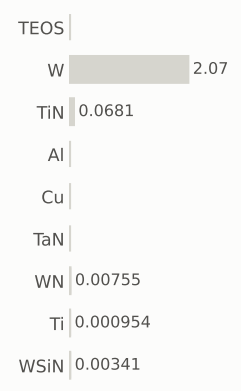

gases emitted (g)

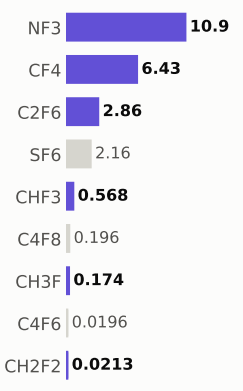

Step #10400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,023.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

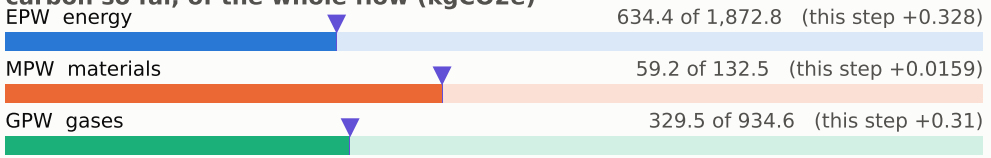

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

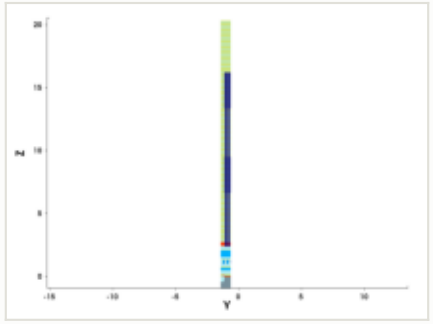

y cut at -1.035 µm

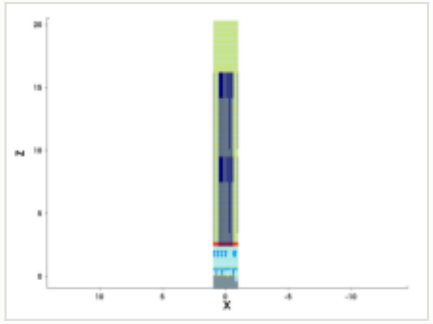

mask for this step

no mask for this step

steps by process area

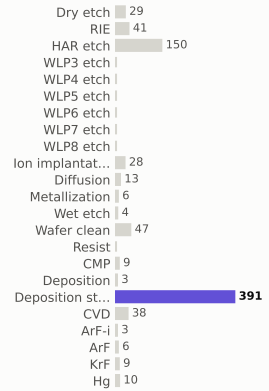

materials deposited (g)

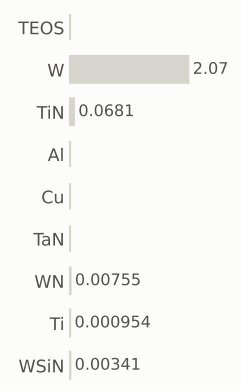

gases emitted (g)

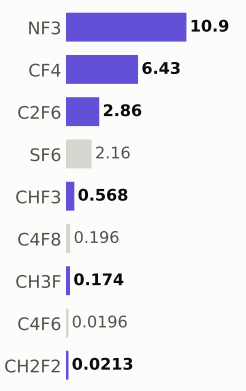

Step #10410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,023.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

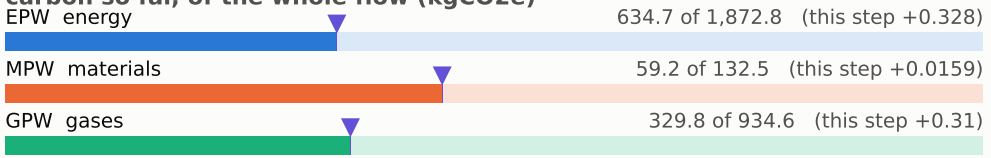

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

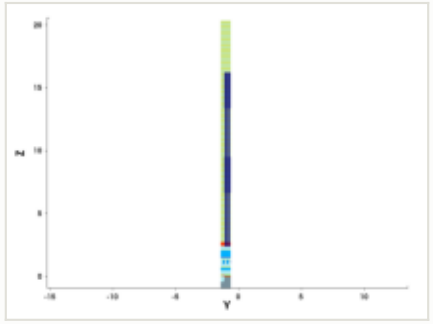

y cut at -1.035 µm

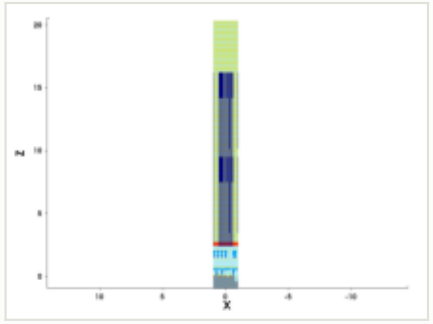

mask for this step

no mask for this step

steps by process area

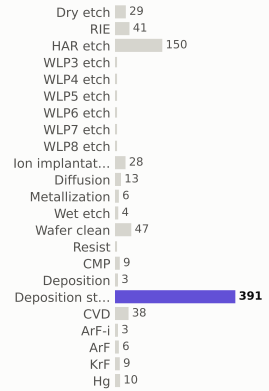

materials deposited (g)

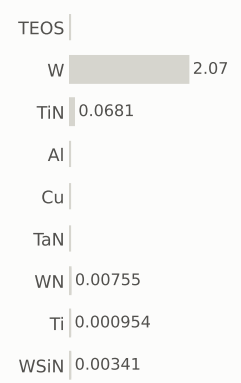

gases emitted (g)

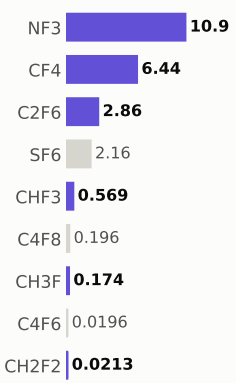

Step #10420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,024.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

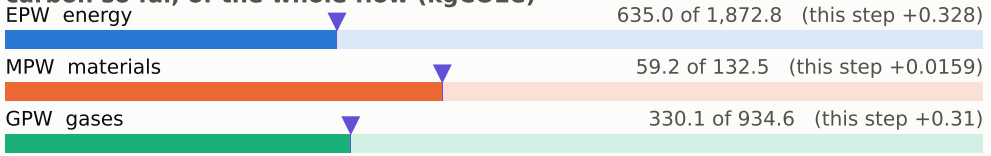

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

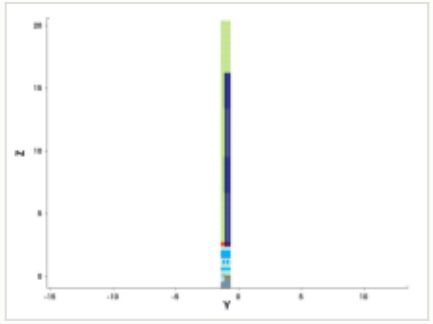

y cut at -1.035 µm

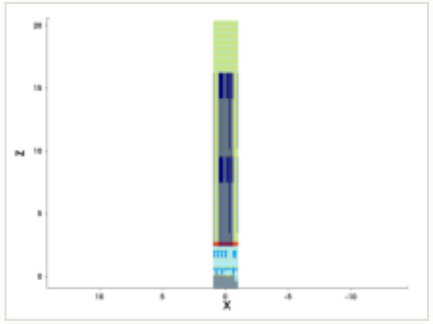

mask for this step

no mask for this step

steps by process area

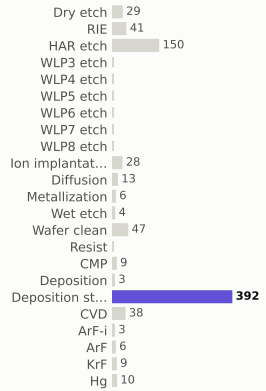

materials deposited (g)

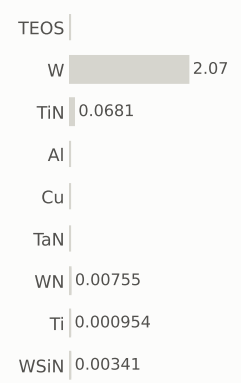

gases emitted (g)

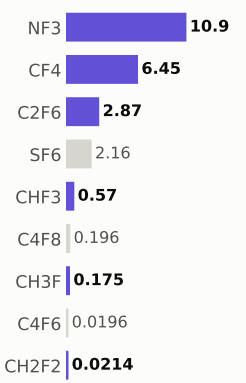

Step #10430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,025.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 635.4 of 1,872.8 (this step +0.328)

MPW materials — 59.2 of 132.5 (this step +0.0159)

GPW gases — 330.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

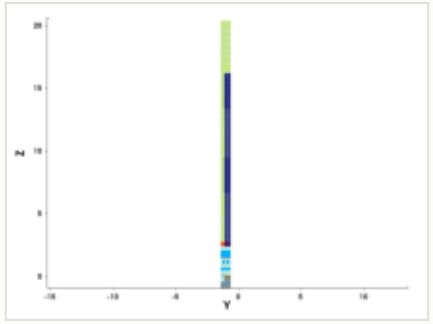

y cut at -1.035 µm

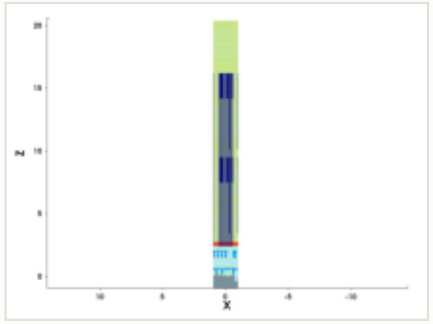

mask for this step

no mask for this step

steps by process area

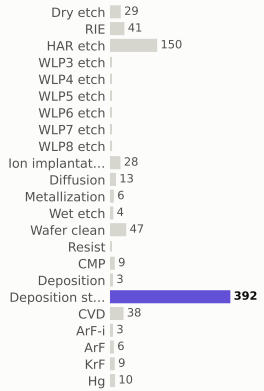

materials deposited (g)

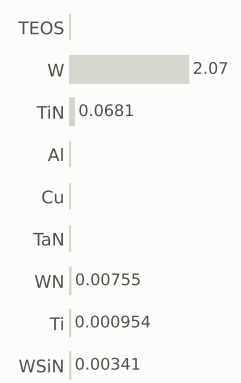

gases emitted (g)

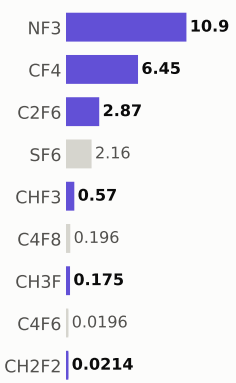

Step #10440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,025.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

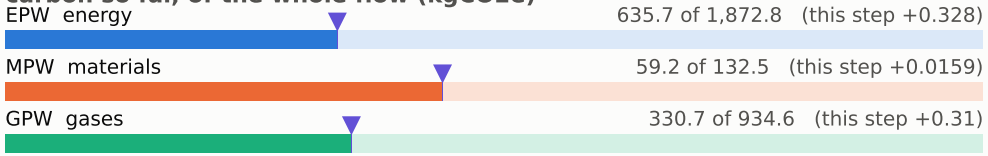

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

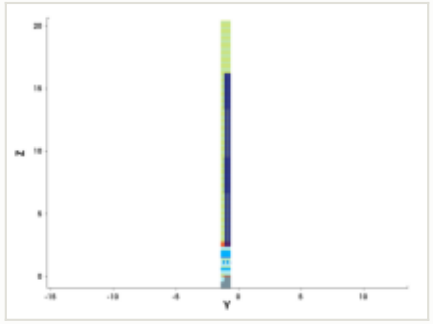

y cut at -1.035 µm

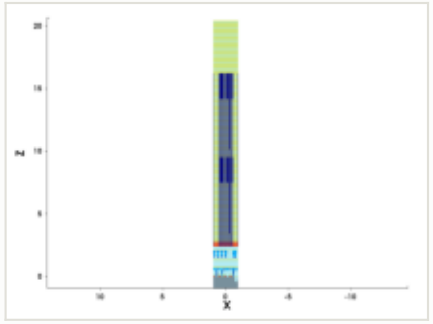

mask for this step

no mask for this step

steps by process area

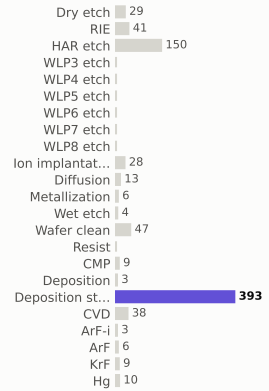

materials deposited (g)

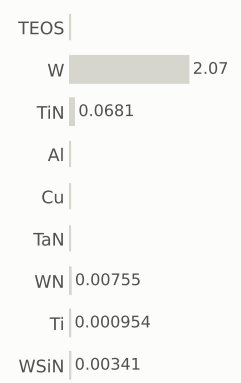

gases emitted (g)

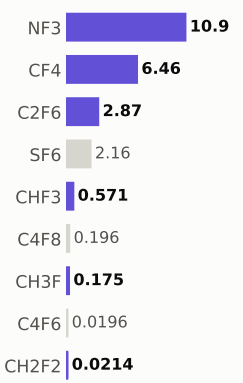

Step #10450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,026.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

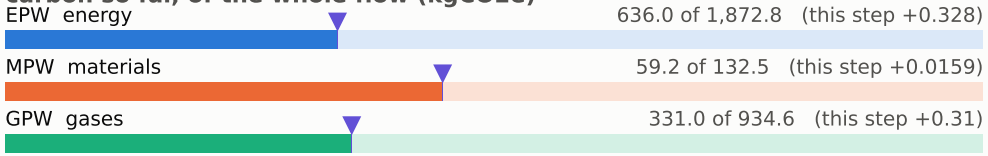

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

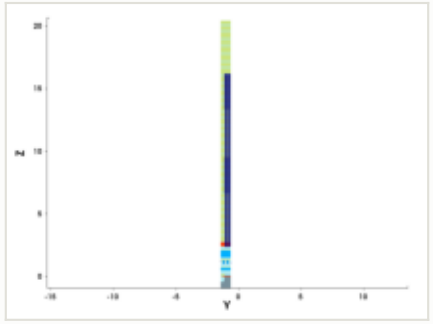

y cut at -1.035 µm

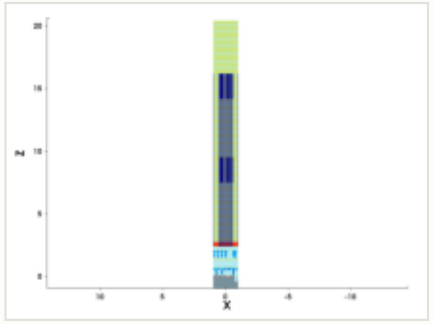

mask for this step

no mask for this step

steps by process area

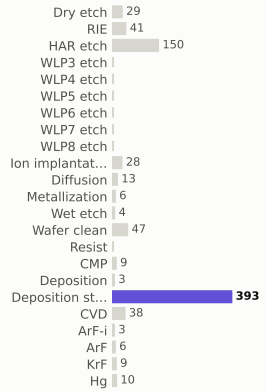

materials deposited (g)

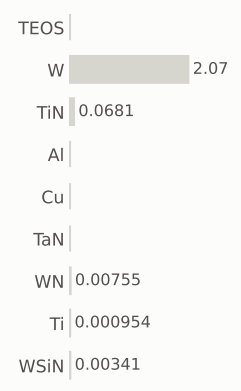

gases emitted (g)

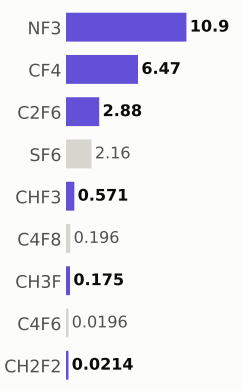

Step #10460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,026.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

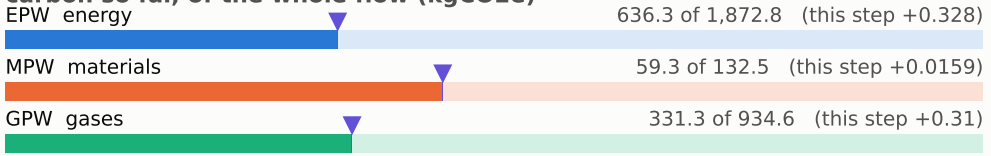

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

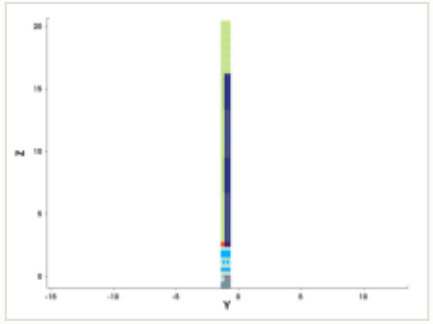

y cut at -1.035 µm

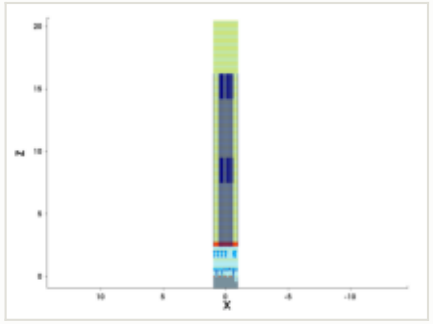

mask for this step

no mask for this step

steps by process area

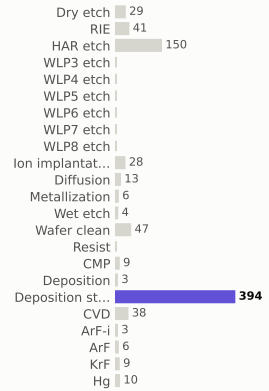

materials deposited (g)

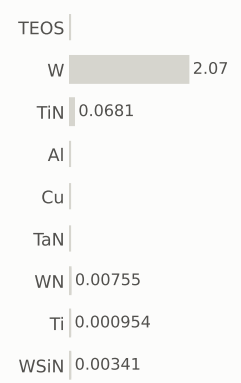

gases emitted (g)

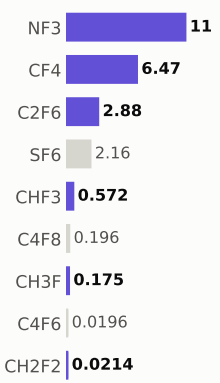

Step #10470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,027.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 636.7 of 1,872.8 (this step +0.328)

MPW materials — 59.3 of 132.5 (this step +0.0159)

GPW gases — 331.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

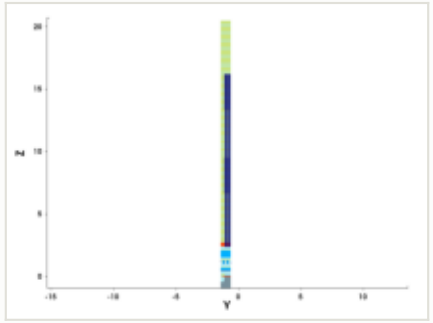

y cut at -1.035 µm

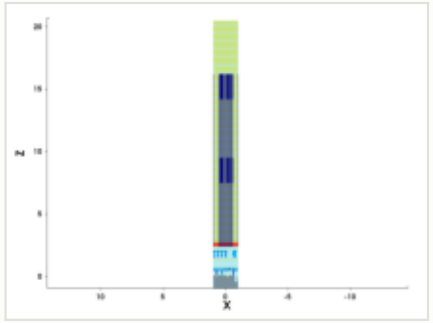

mask for this step

no mask for this step

steps by process area

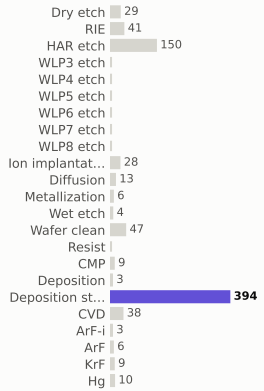

materials deposited (g)

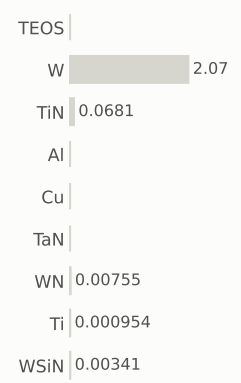

gases emitted (g)

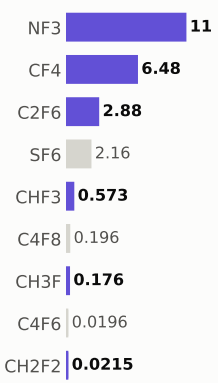

Step #10480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,028.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

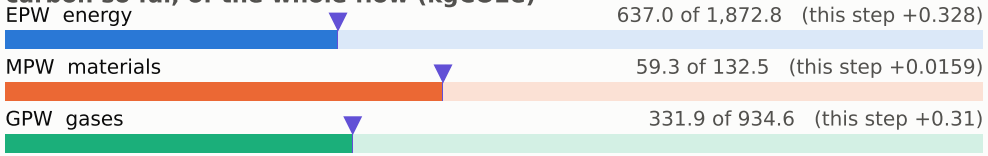

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

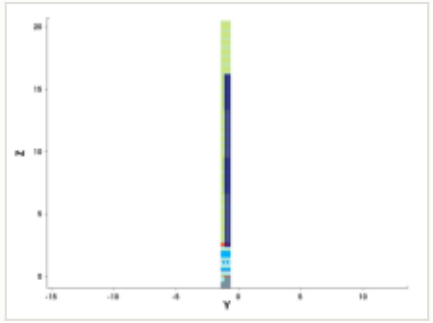

y cut at -1.035 µm

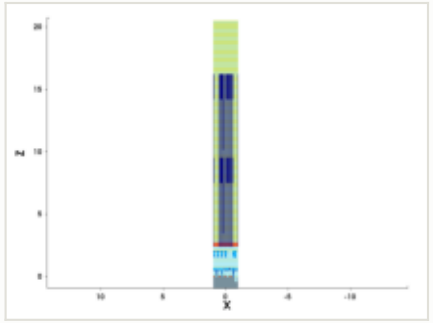

mask for this step

no mask for this step

steps by process area

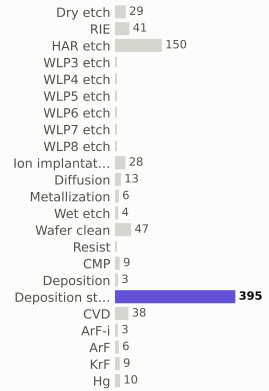

materials deposited (g)

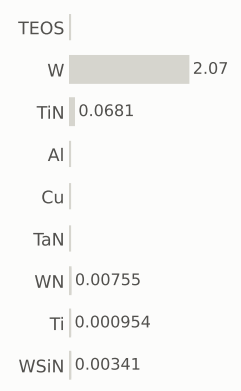

gases emitted (g)

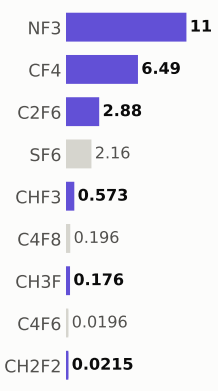

Step #10490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,028.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

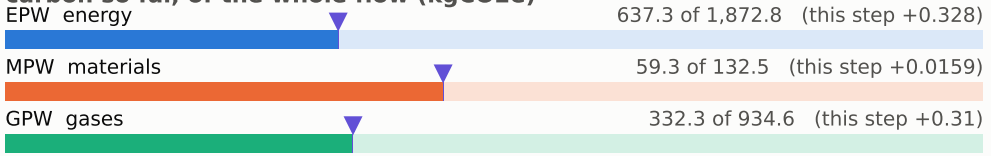

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

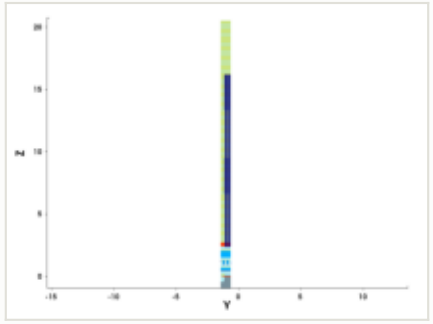

y cut at -1.035 µm

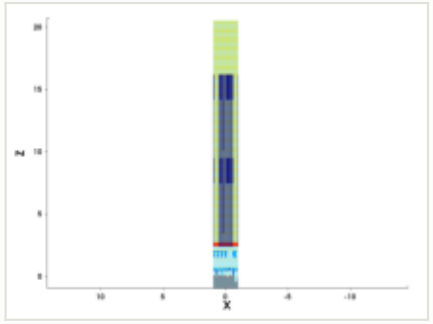

mask for this step

no mask for this step

steps by process area

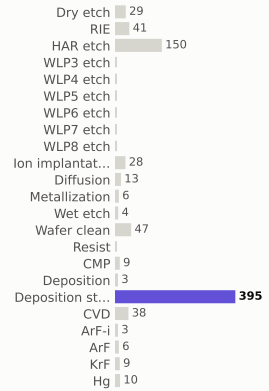

materials deposited (g)

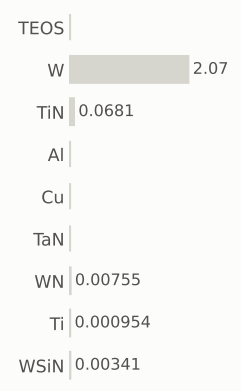

gases emitted (g)

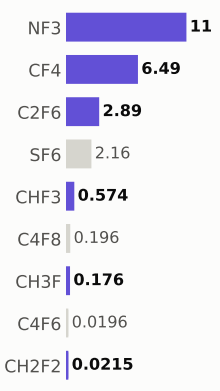

Step #10500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,029.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

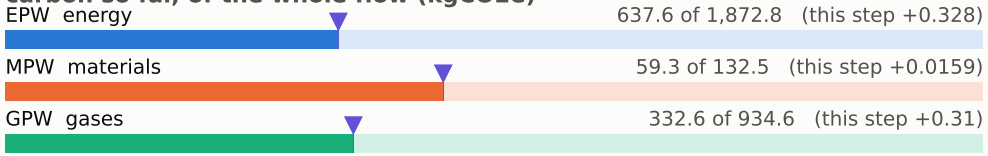

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

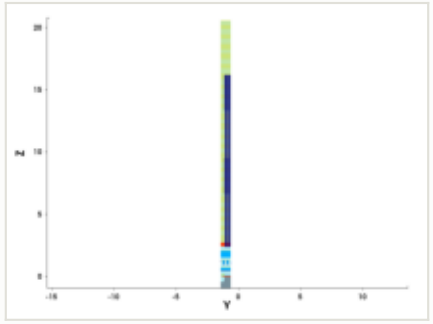

y cut at -1.035 µm

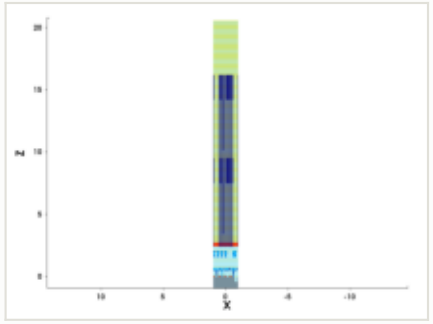

mask for this step

no mask for this step

steps by process area

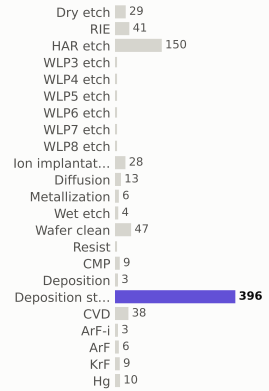

materials deposited (g)

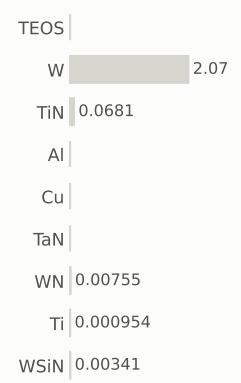

gases emitted (g)



Step #10510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,030.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

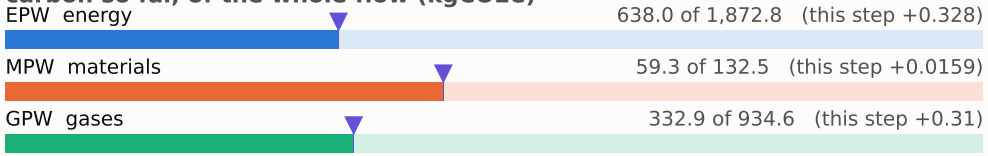

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

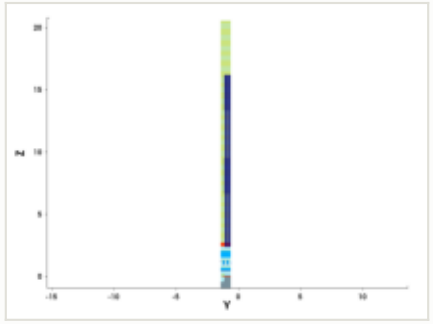

y cut at -1.035 µm

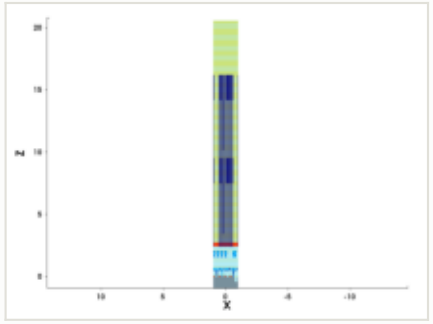

mask for this step

no mask for this step

steps by process area

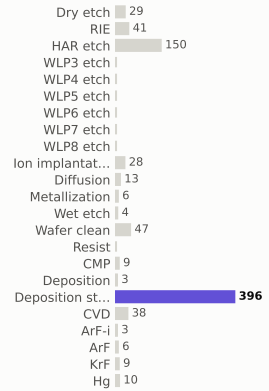

materials deposited (g)

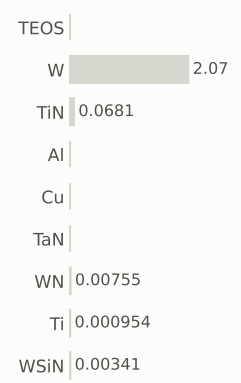

gases emitted (g)



Step #10520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,030.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

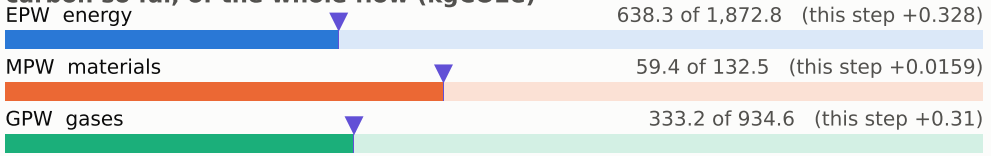

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

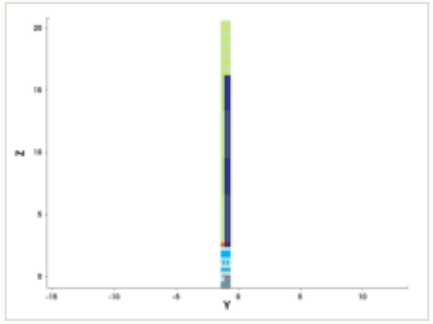

y cut at -1.035 µm

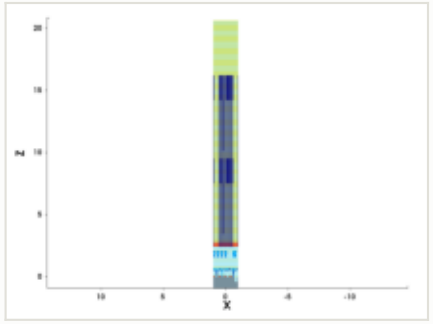

mask for this step

no mask for this step

steps by process area

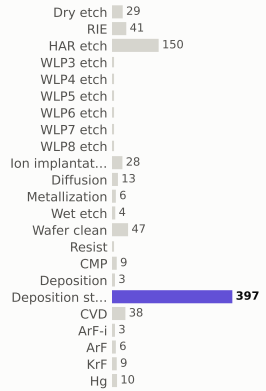

materials deposited (g)

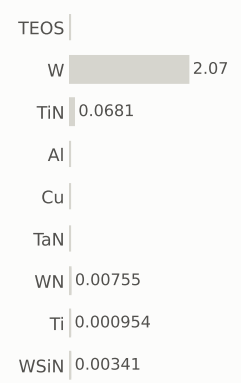

gases emitted (g)



Step #10530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,031.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

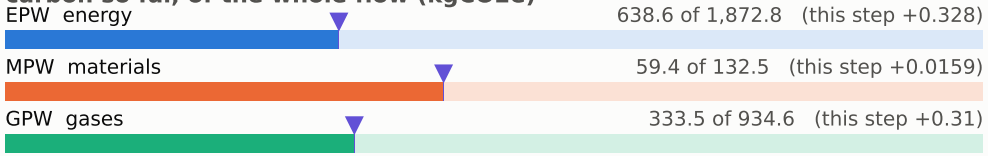

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

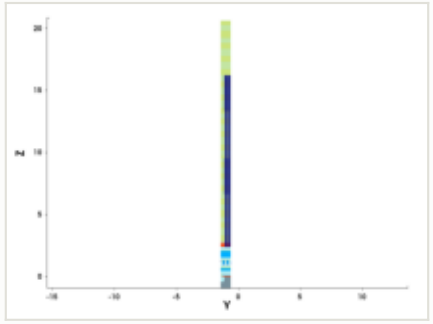

y cut at -1.035 µm

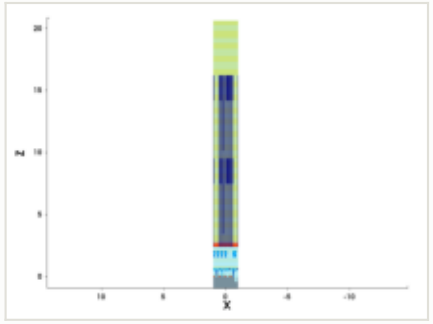

mask for this step

no mask for this step

steps by process area

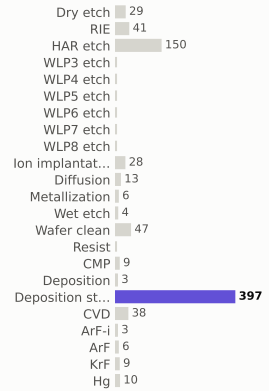

materials deposited (g)

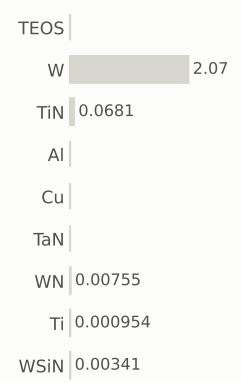

gases emitted (g)

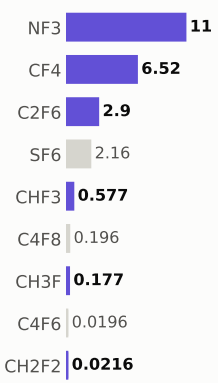

Step #10540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,032.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 639.0 of 1,872.8 (this step +0.328)

MPW materials — 59.4 of 132.5 (this step +0.0159)

GPW gases — 333.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

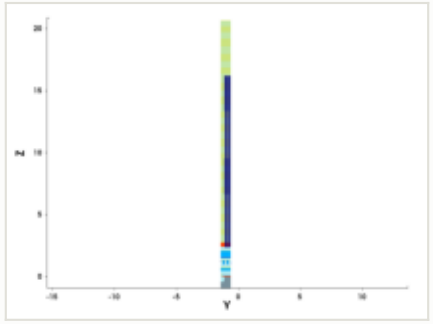

y cut at -1.035 µm

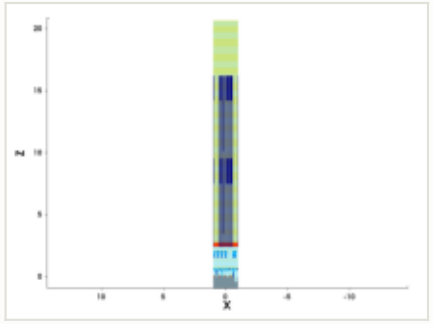

mask for this step

no mask for this step

steps by process area

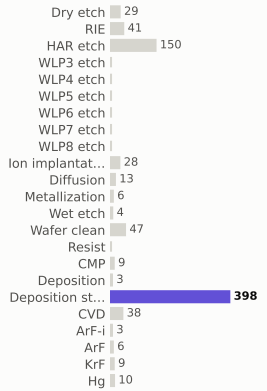

materials deposited (g)

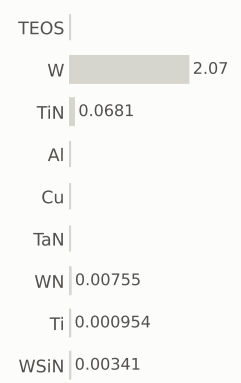

gases emitted (g)

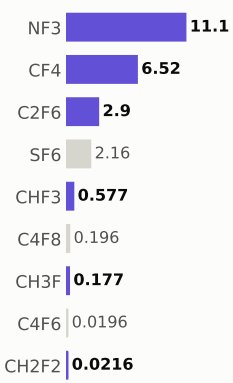

Step #10550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,032.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

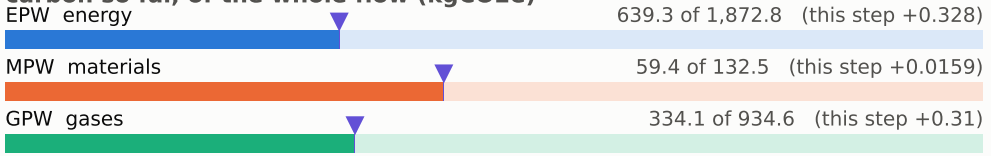

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

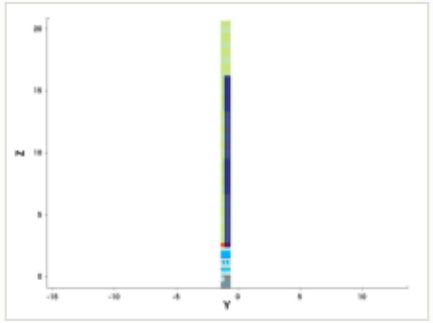

y cut at -1.035 µm

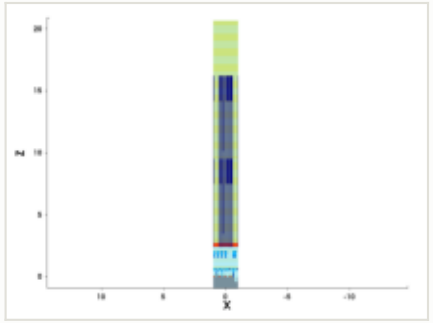

mask for this step

no mask for this step

steps by process area

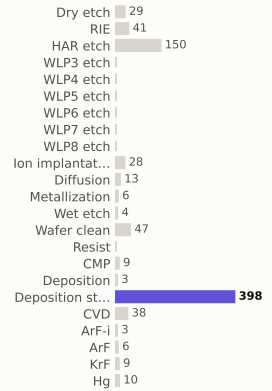

materials deposited (g)

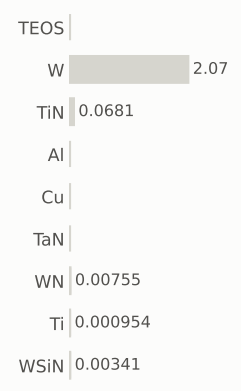

gases emitted (g)

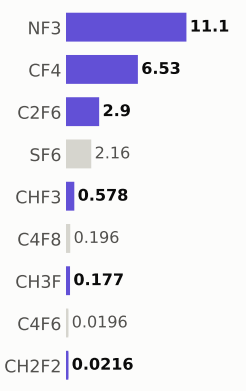

Step #10560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,033.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

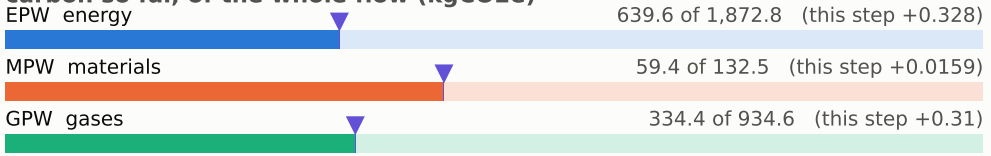

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

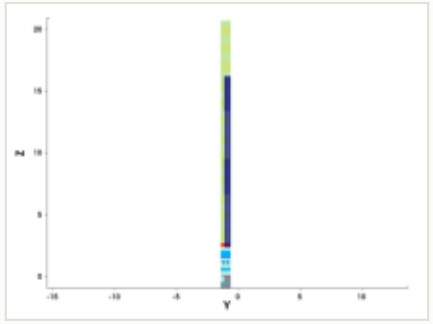

y cut at -1.035 µm

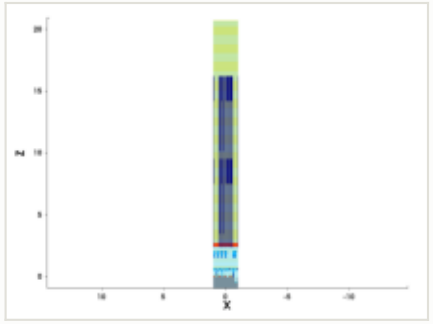

mask for this step

no mask for this step

steps by process area

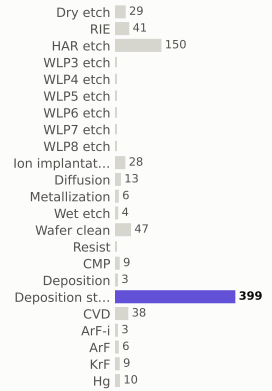

materials deposited (g)

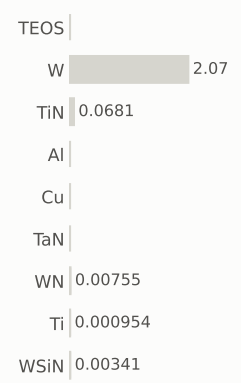

gases emitted (g)

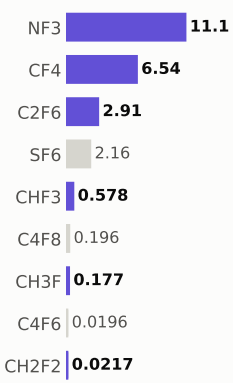

Step #10570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,034.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

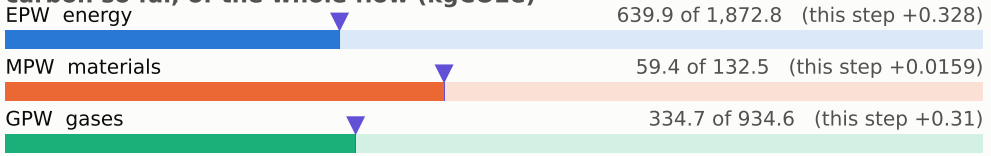

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

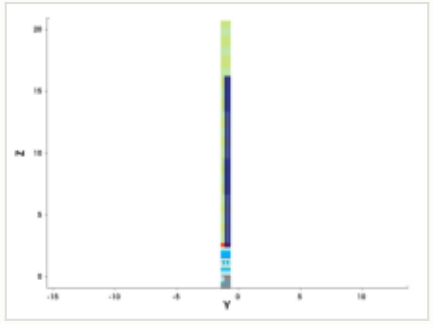

y cut at -1.035 µm

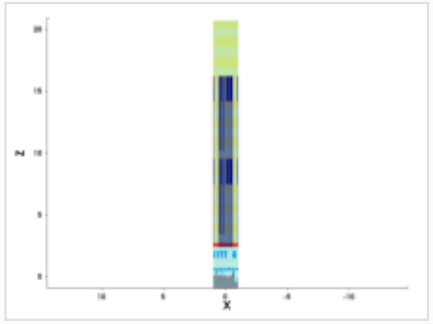

mask for this step

no mask for this step

steps by process area

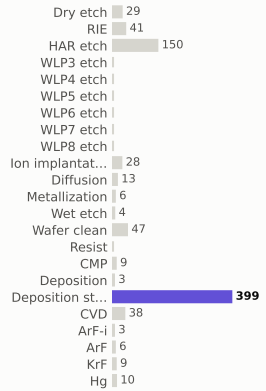

materials deposited (g)

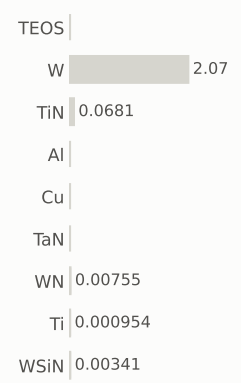

gases emitted (g)

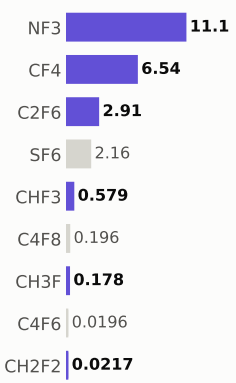

Step #10580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,034.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 640.3 of 1,872.8 (this step +0.328)

MPW materials — 59.5 of 132.5 (this step +0.0159)

GPW gases — 335.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

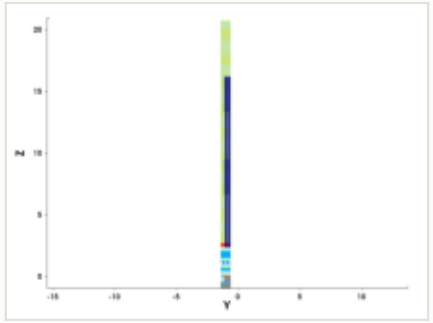

y cut at -1.035 µm

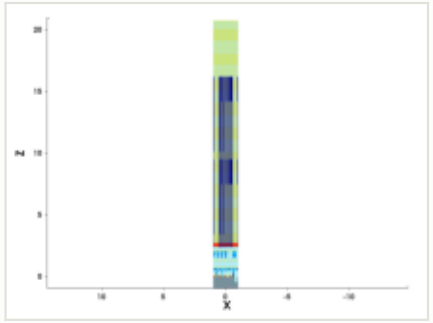

mask for this step

no mask for this step

steps by process area

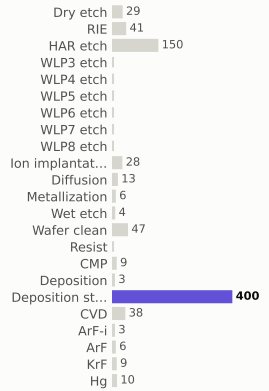

materials deposited (g)

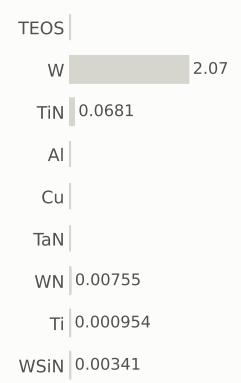

gases emitted (g)

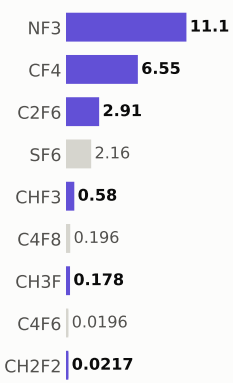

Step #10590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,035.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

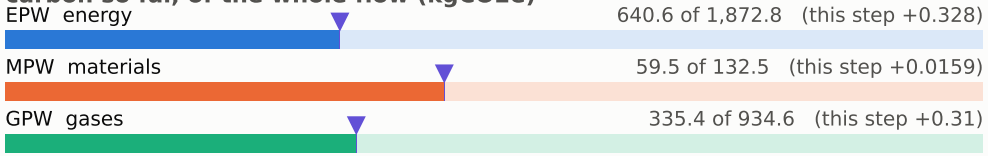

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

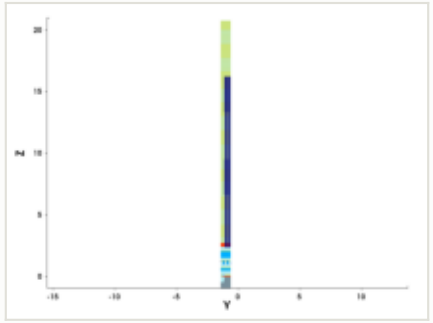

y cut at -1.035 µm

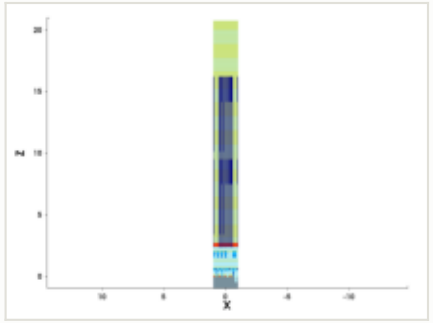

mask for this step

no mask for this step

steps by process area

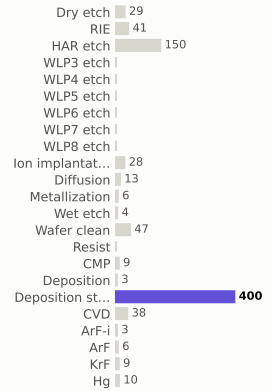

materials deposited (g)

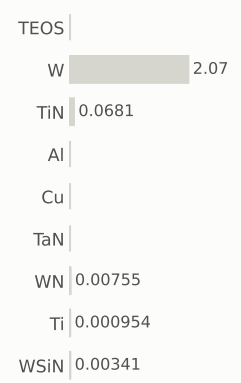

gases emitted (g)

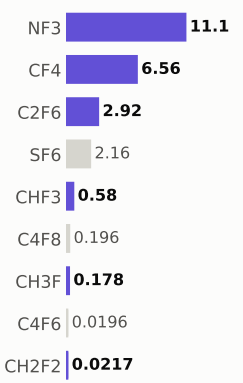

Step #10600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,036.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

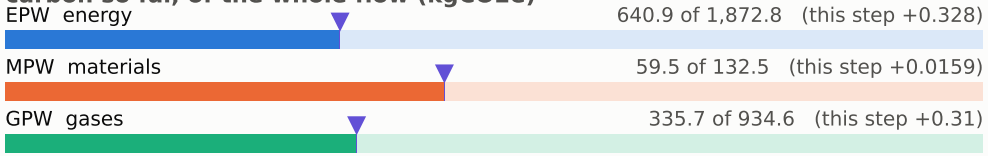

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

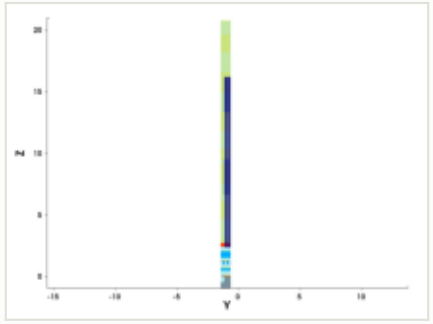

y cut at -1.035 µm

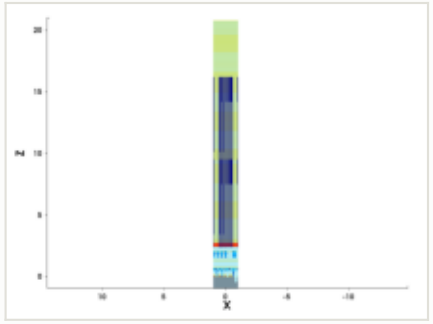

mask for this step

no mask for this step

steps by process area

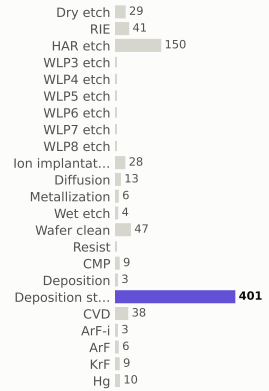

materials deposited (g)

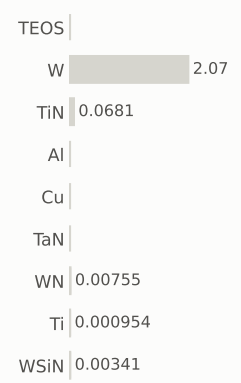

gases emitted (g)

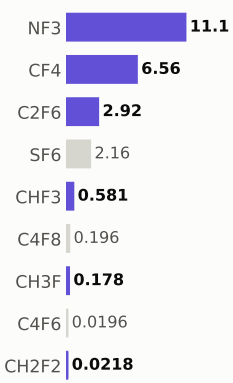

Step #10610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,036.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

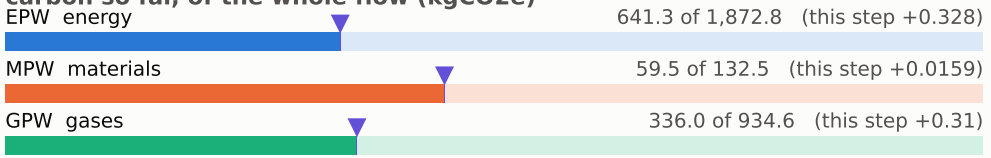

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

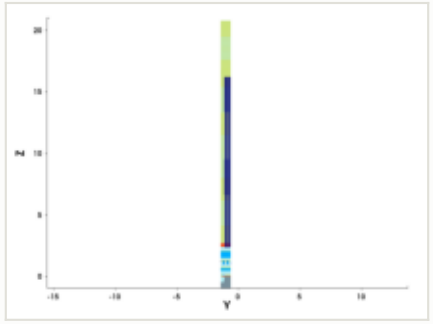

y cut at -1.035 µm

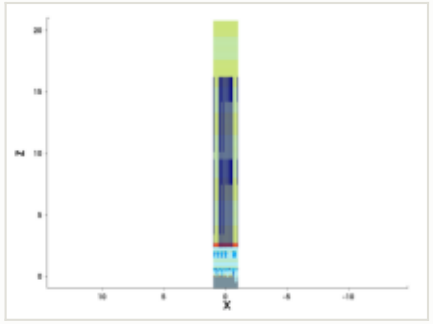

mask for this step

no mask for this step

steps by process area

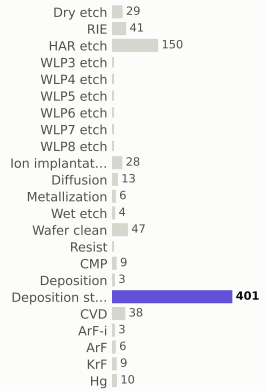

materials deposited (g)

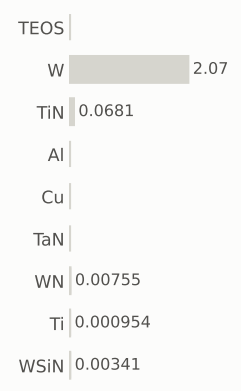

gases emitted (g)

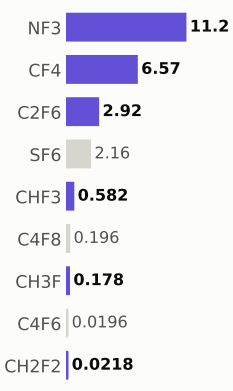

Step #10620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,037.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

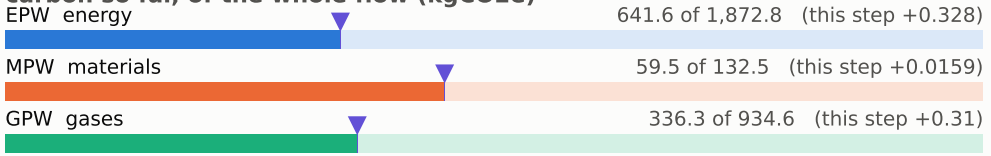

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

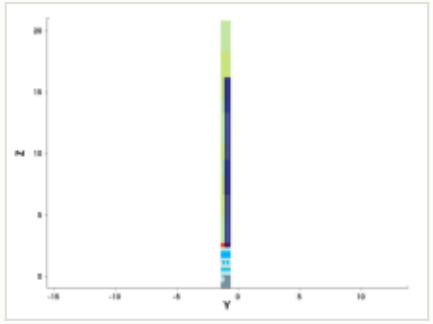

y cut at -1.035 µm

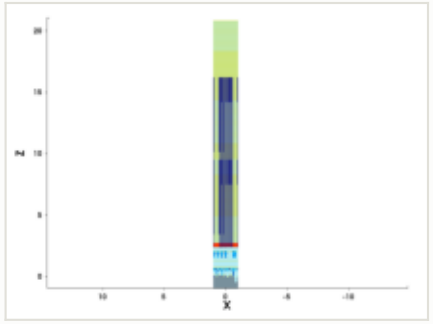

mask for this step

no mask for this step

steps by process area

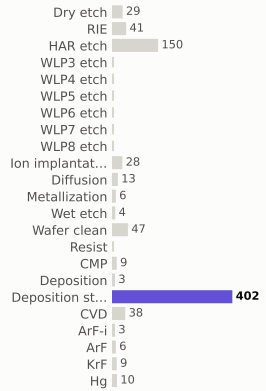

materials deposited (g)

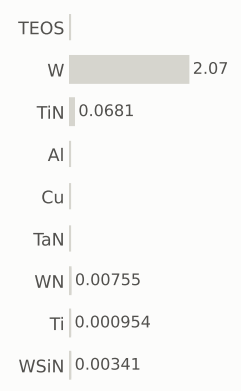

gases emitted (g)

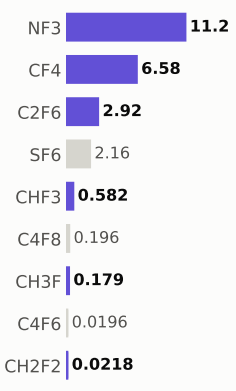

Step #10630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,038.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

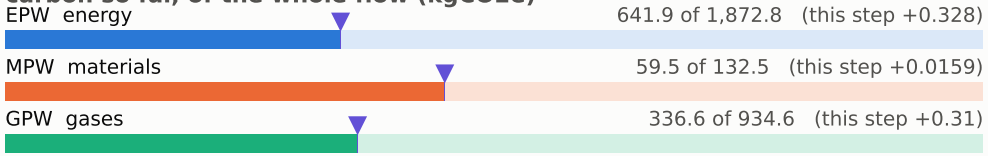

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

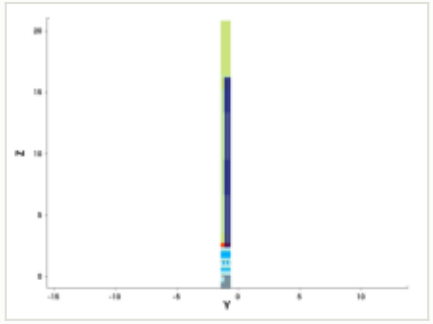

y cut at -1.035 µm

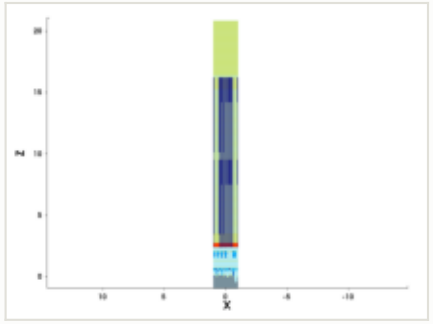

mask for this step

no mask for this step

steps by process area

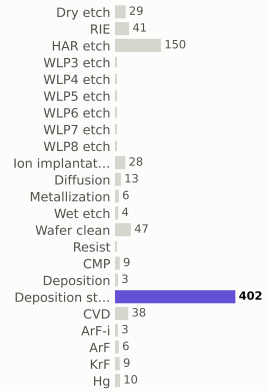

materials deposited (g)

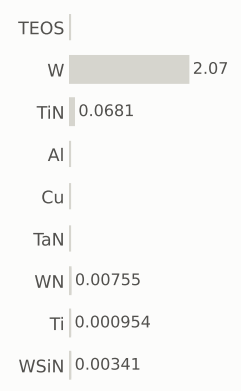

gases emitted (g)

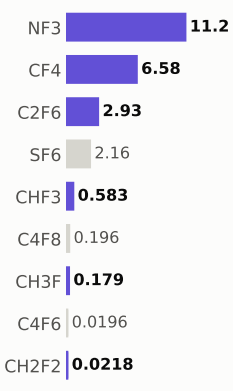

Step #10640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,038.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

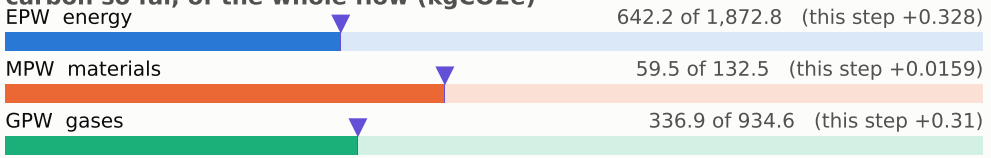

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

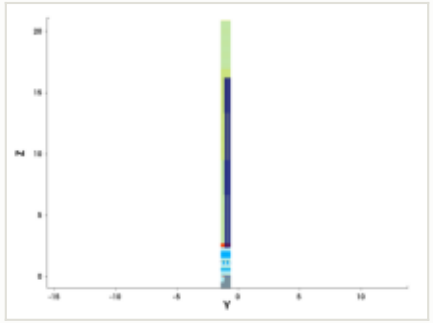

y cut at -1.035 µm

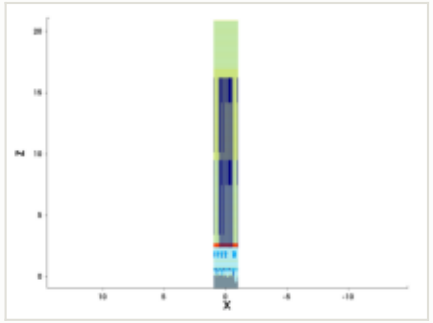

mask for this step

no mask for this step

steps by process area

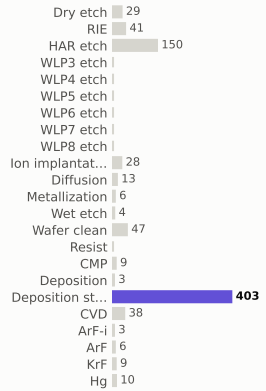

materials deposited (g)

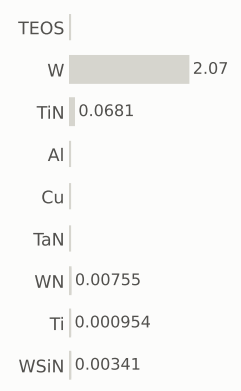

gases emitted (g)

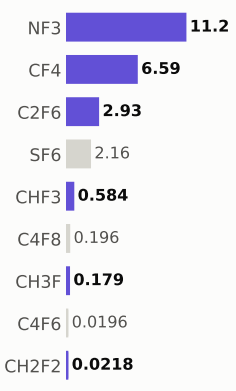

Step #10650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,039.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

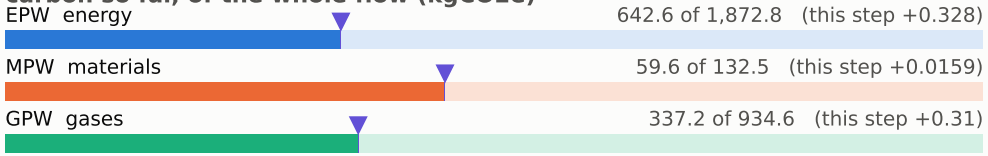

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

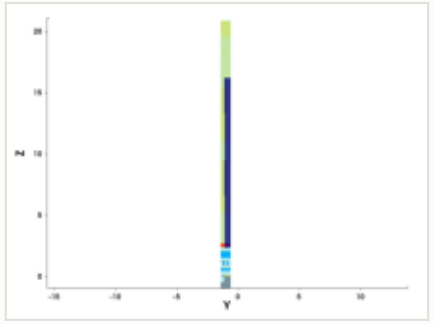

y cut at -1.035 µm

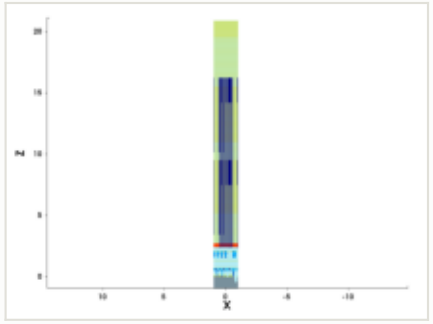

mask for this step

no mask for this step

steps by process area

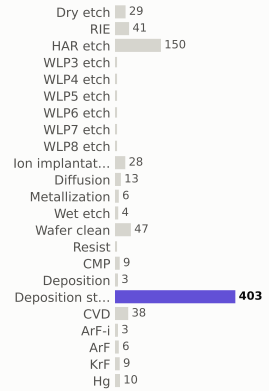

materials deposited (g)

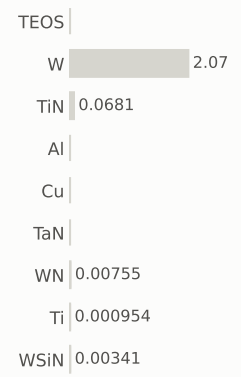

gases emitted (g)

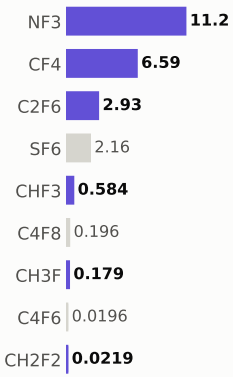

Step #10660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,040.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 642.9 of 1,872.8 (this step +0.328)

MPW materials — 59.6 of 132.5 (this step +0.0159)

GPW gases — 337.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

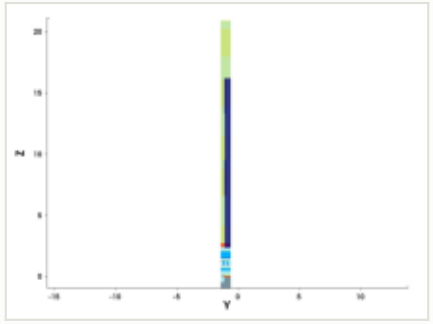

y cut at -1.035 µm

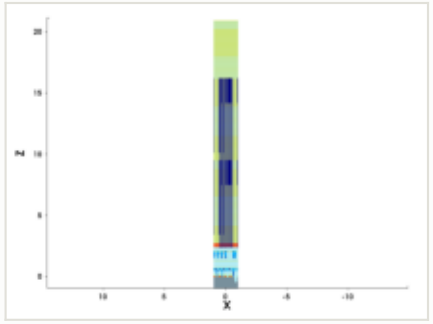

mask for this step

no mask for this step

steps by process area

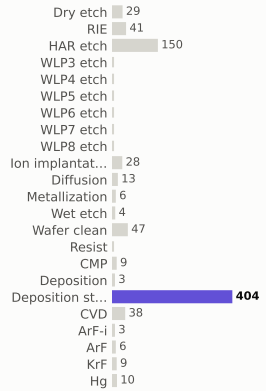

materials deposited (g)

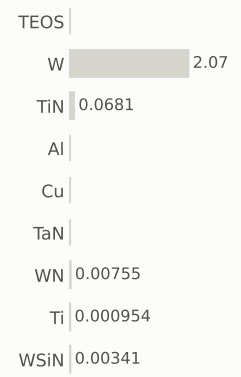

gases emitted (g)

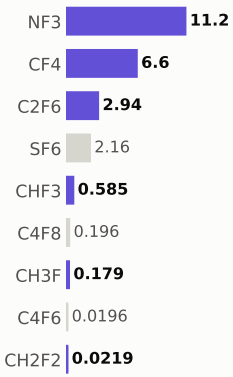

Step #10670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,040.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 643.2 of 1,872.8 (this step +0.328)

MPW materials — 59.6 of 132.5 (this step +0.0159)

GPW gases — 337.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

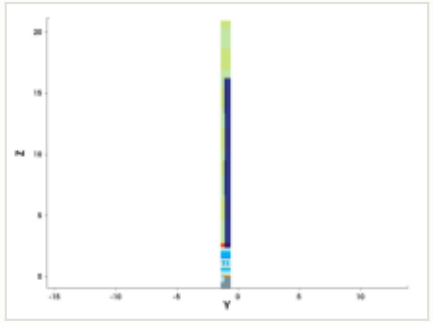

y cut at -1.035 µm

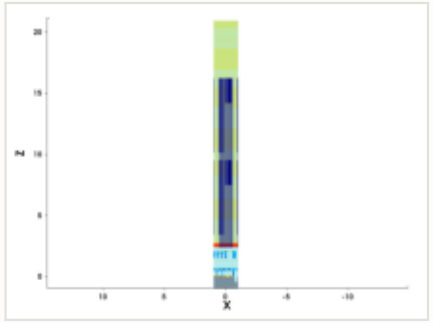

mask for this step

no mask for this step

steps by process area

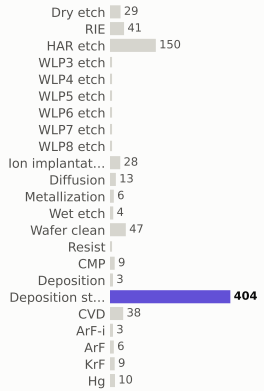

materials deposited (g)

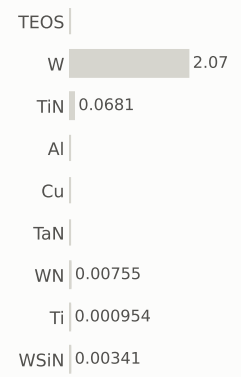

gases emitted (g)

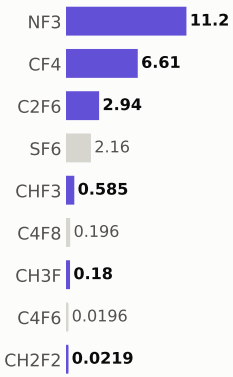

Step #10680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,041.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

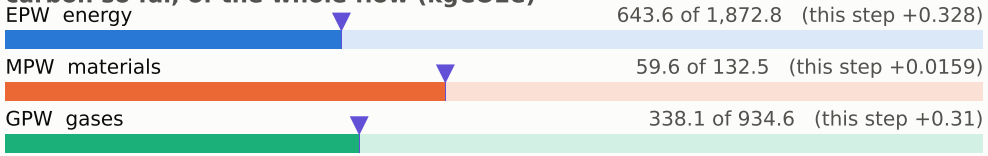

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

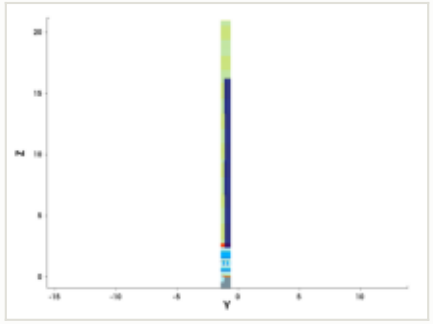

y cut at -1.035 µm

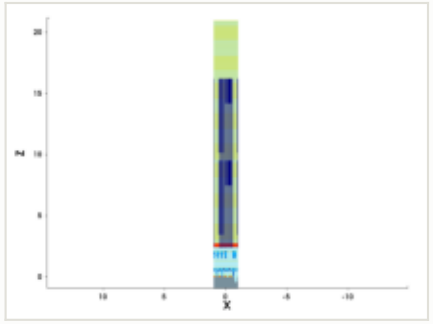

mask for this step

no mask for this step

steps by process area

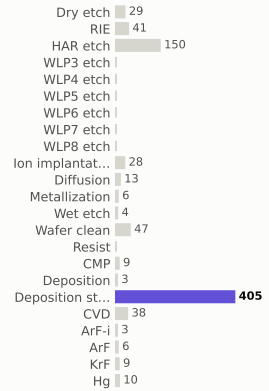

materials deposited (g)

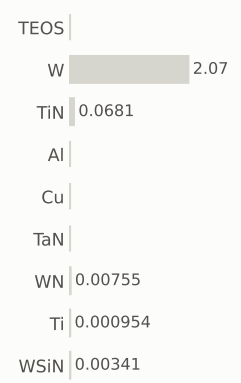

gases emitted (g)

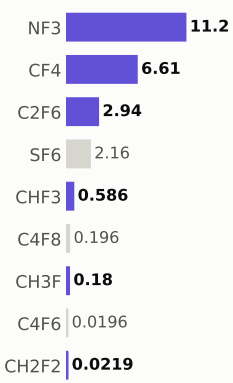

Step #10690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,042.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

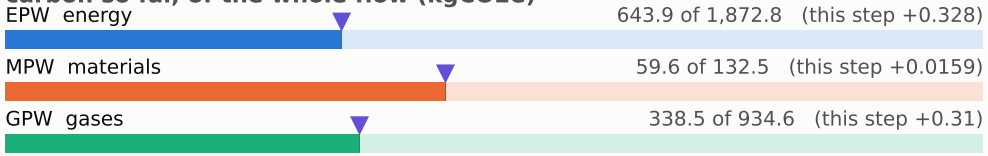

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

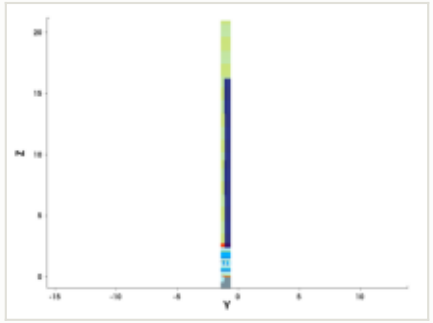

y cut at -1.035 µm

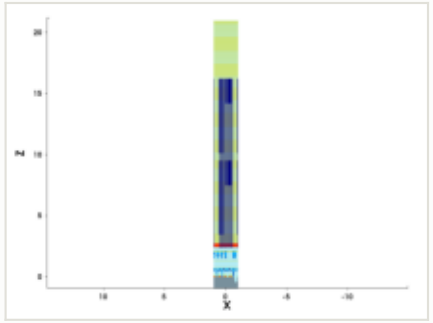

mask for this step

no mask for this step

steps by process area

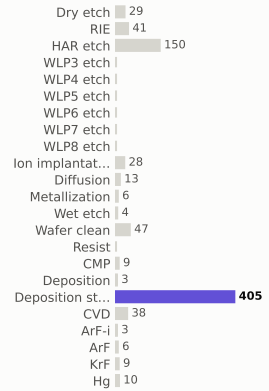

materials deposited (g)

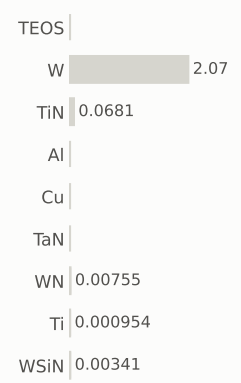

gases emitted (g)

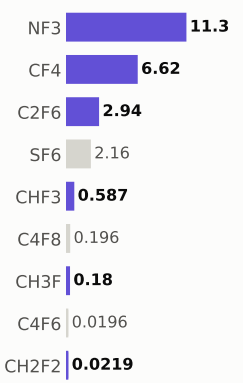

Step #10700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,042.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

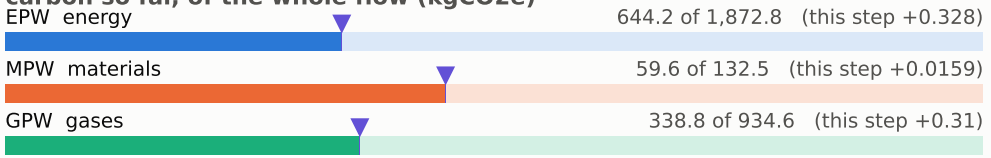

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

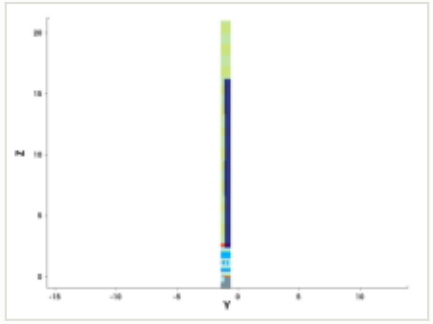

y cut at -1.035 µm

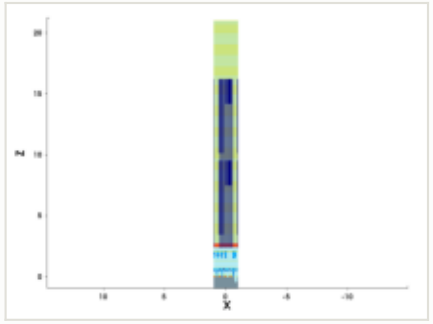

mask for this step

no mask for this step

steps by process area

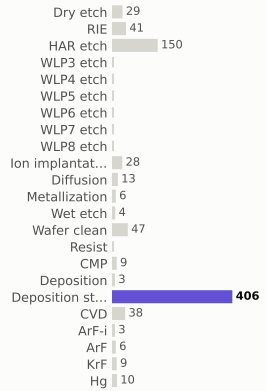

materials deposited (g)

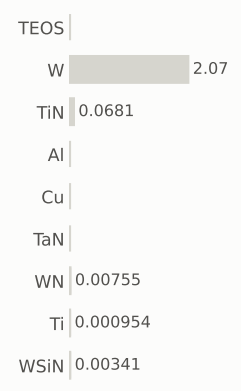

gases emitted (g)

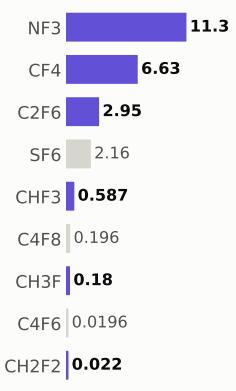

Step #10710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,043.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

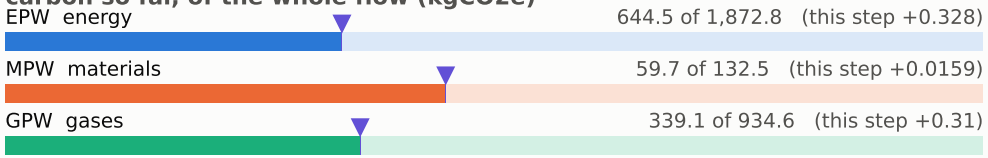

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

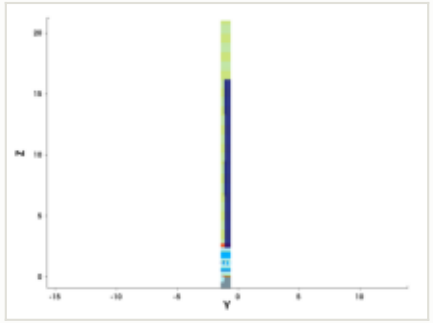

y cut at -1.035 µm

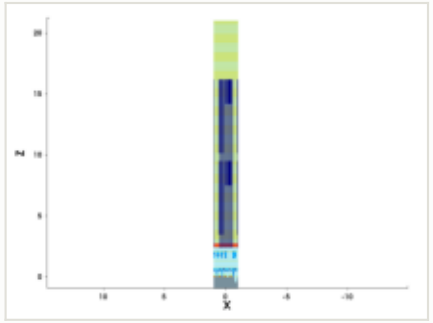

mask for this step

no mask for this step

steps by process area

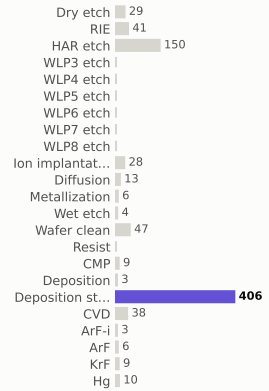

materials deposited (g)

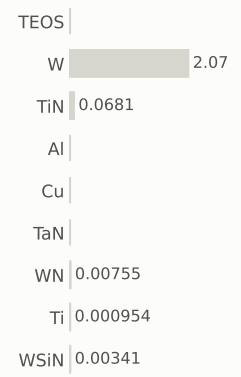

gases emitted (g)

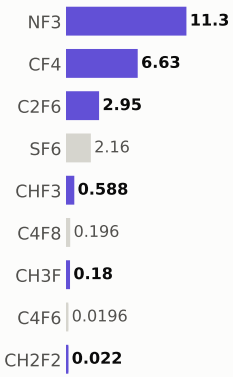

Step #10720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,043.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

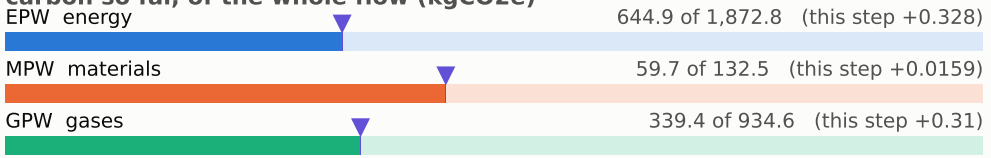

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

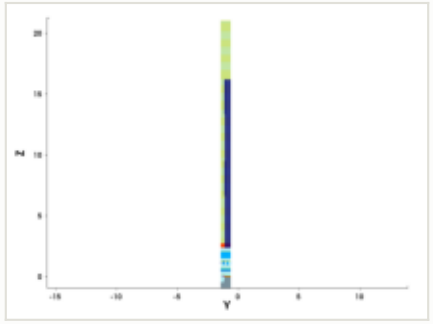

y cut at -1.035 µm

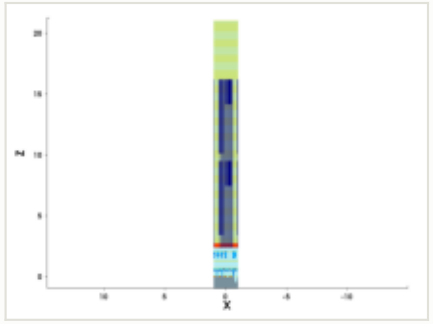

mask for this step

no mask for this step

steps by process area

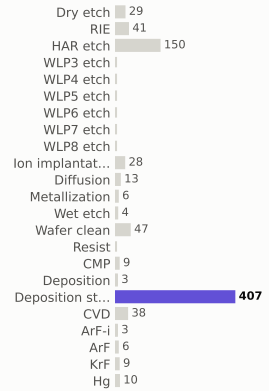

materials deposited (g)

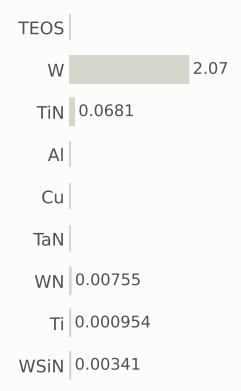

gases emitted (g)

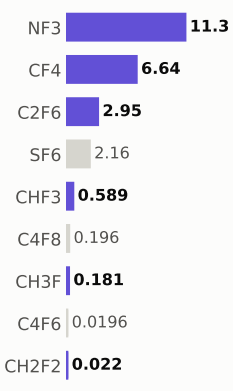

Step #10730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,044.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

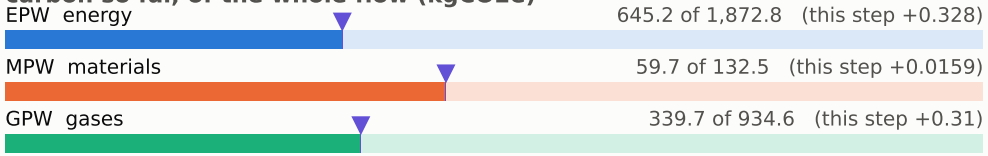

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

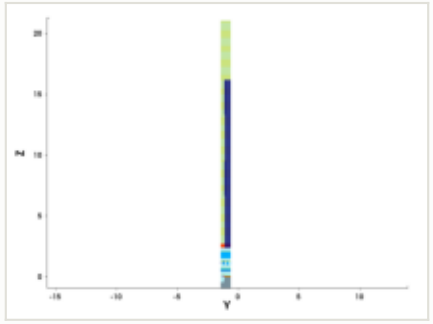

y cut at -1.035 µm

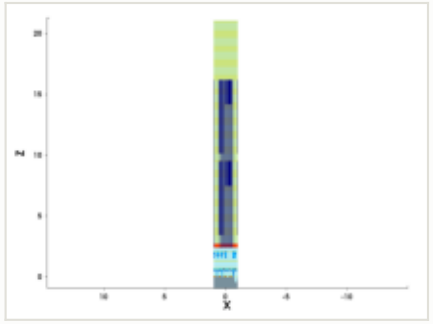

mask for this step

no mask for this step

steps by process area

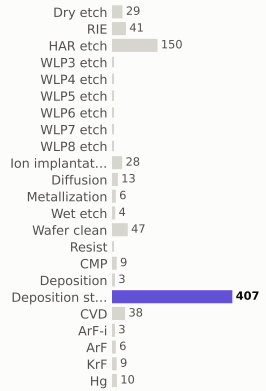

materials deposited (g)

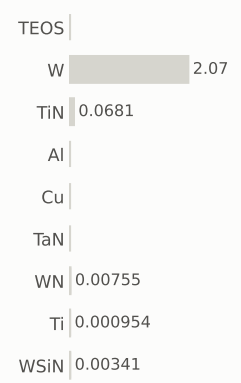

gases emitted (g)

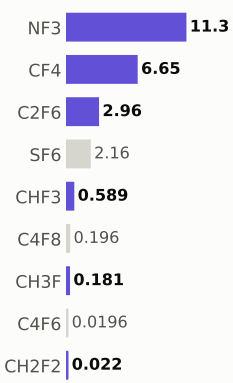

Step #10740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,045.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

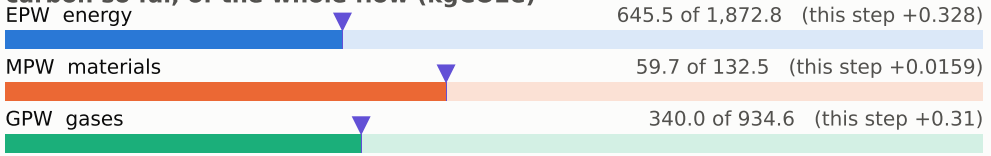

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

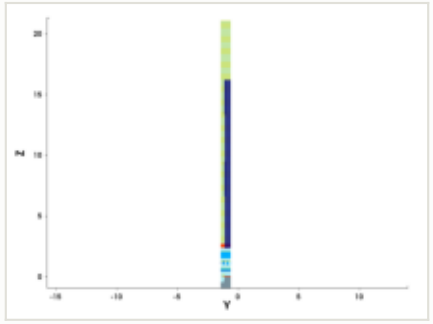

y cut at -1.035 µm

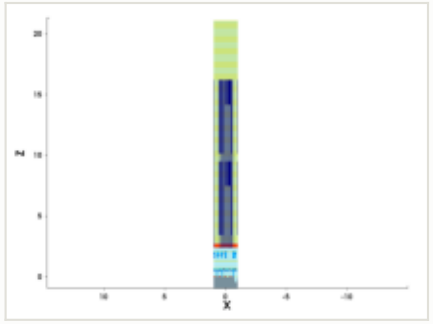

mask for this step

no mask for this step

steps by process area

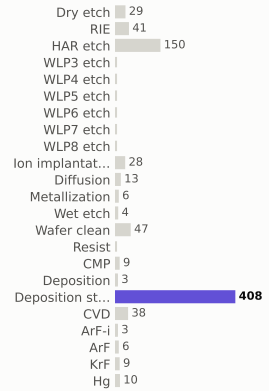

materials deposited (g)

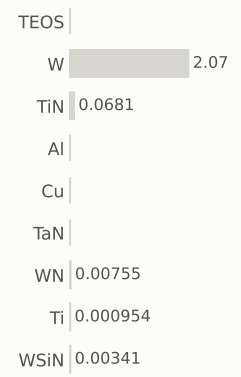

gases emitted (g)

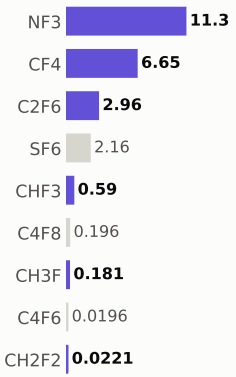

Step #10750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,045.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 645.8 of 1,872.8 (this step +0.328)

MPW materials — 59.7 of 132.5 (this step +0.0159)

GPW gases — 340.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

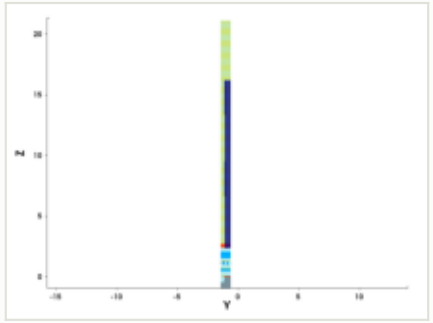

y cut at -1.035 µm

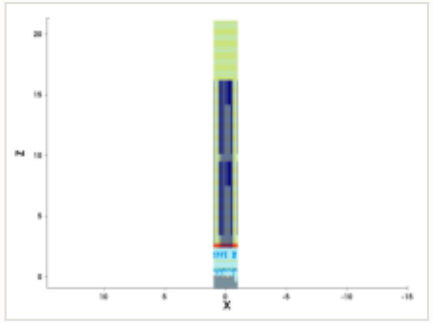

mask for this step

no mask for this step

steps by process area

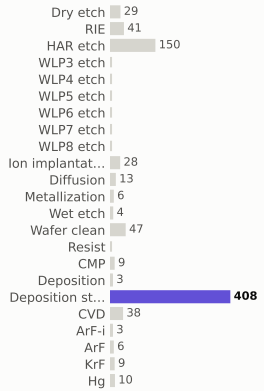

materials deposited (g)

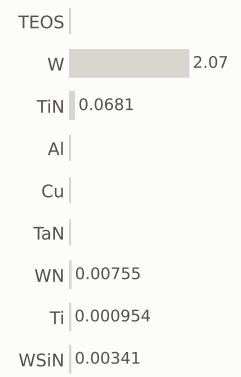

gases emitted (g)

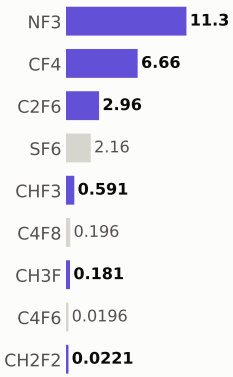

Step #10760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,046.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

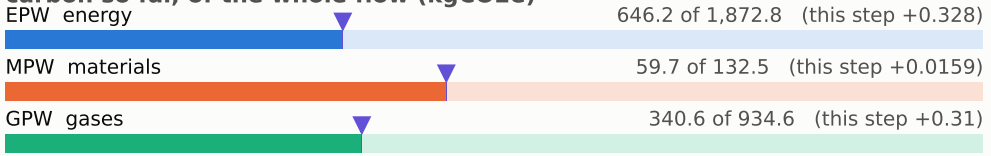

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

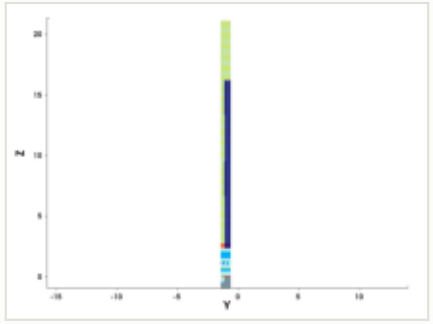

y cut at -1.035 µm

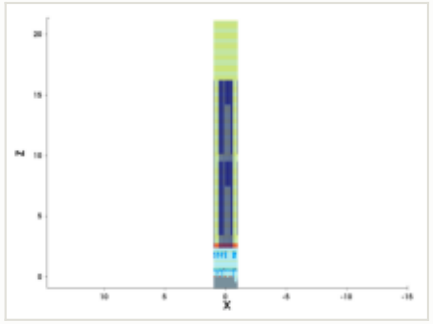

mask for this step

no mask for this step

steps by process area

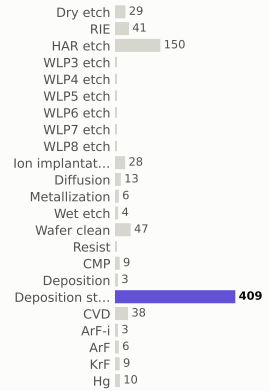

materials deposited (g)

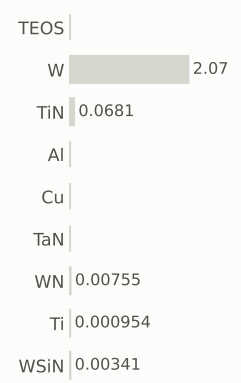

gases emitted (g)

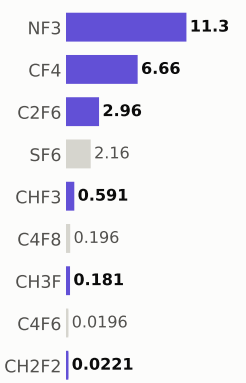

Step #10770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,047.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 646.5 of 1,872.8 (this step +0.328)

MPW materials — 59.8 of 132.5 (this step +0.0159)

GPW gases — 340.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

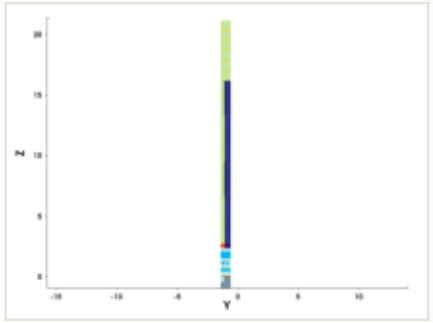

y cut at -1.035 µm

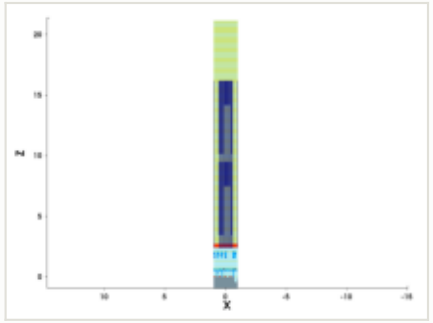

mask for this step

no mask for this step

steps by process area

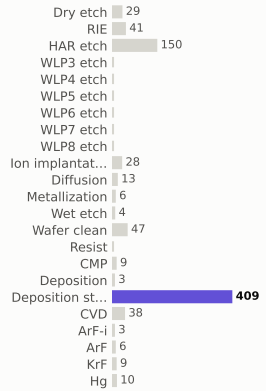

materials deposited (g)

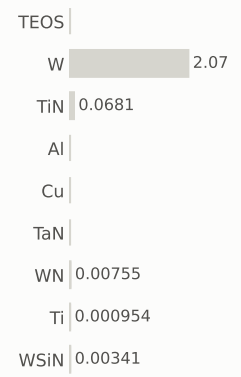

gases emitted (g)

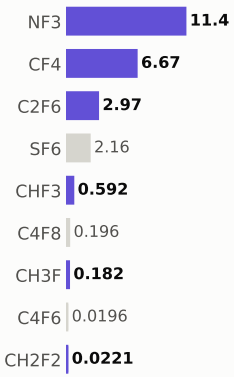

Step #10780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,047.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

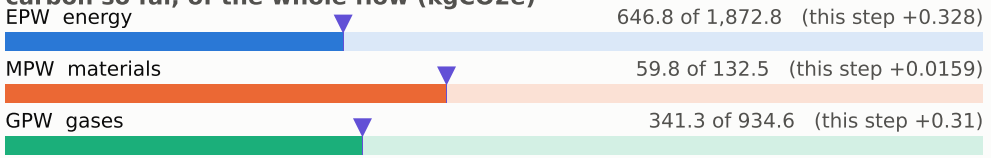

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

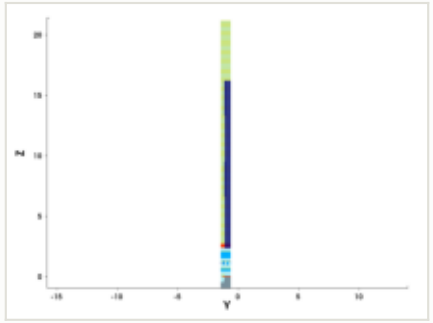

y cut at -1.035 µm

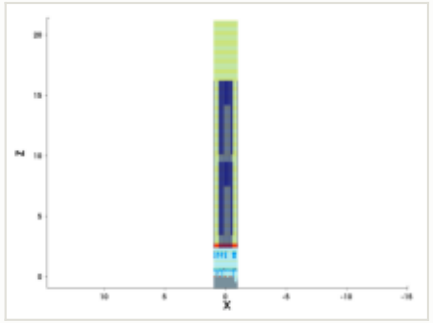

mask for this step

no mask for this step

steps by process area

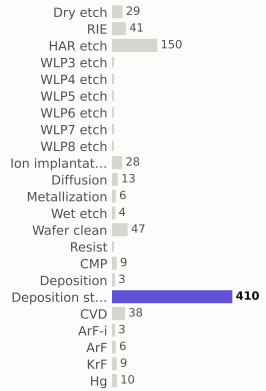

materials deposited (g)

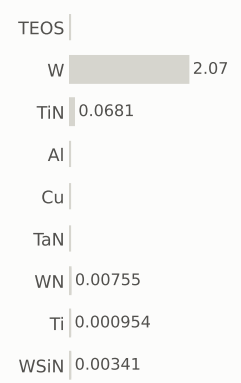

gases emitted (g)

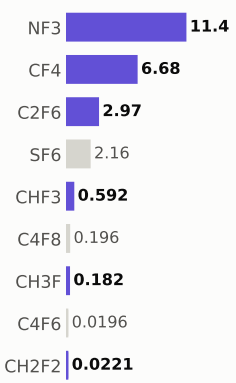

Step #10790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,048.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

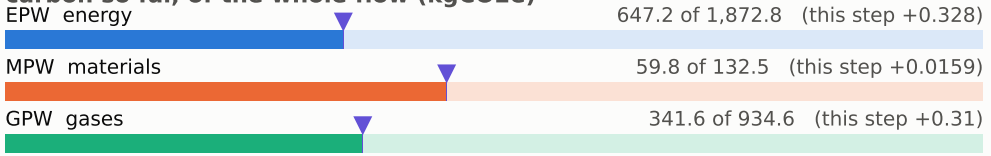

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

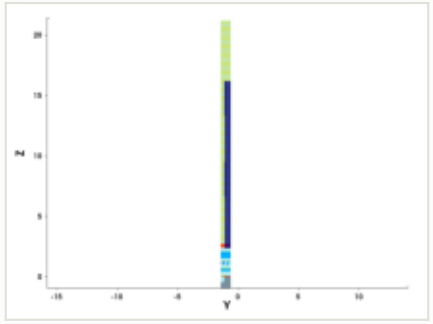

y cut at -1.035 µm

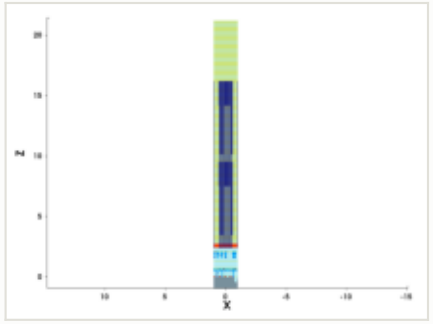

mask for this step

no mask for this step

steps by process area

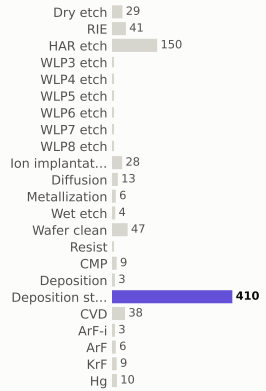

materials deposited (g)

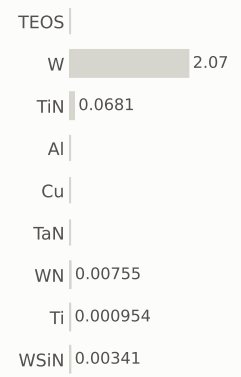

gases emitted (g)

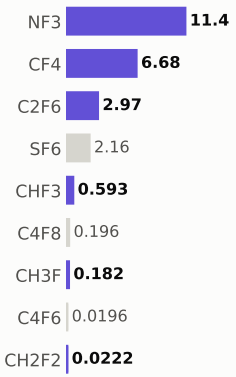

Step #10800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,049.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

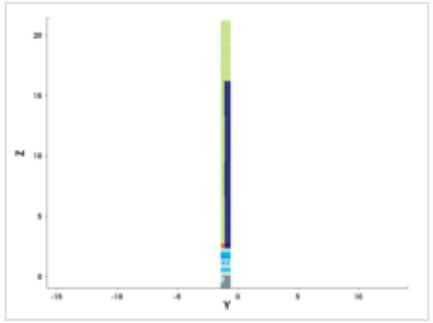

y cut at -1.035 µm

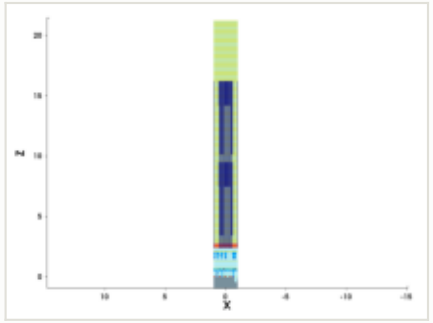

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

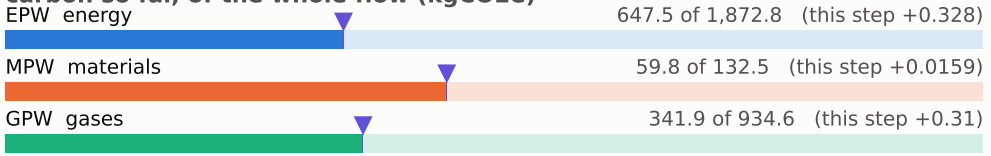

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

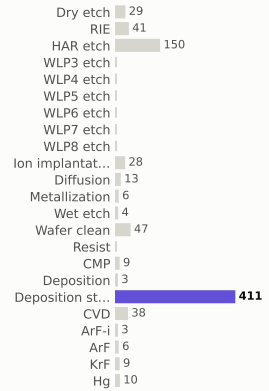

materials deposited (g)

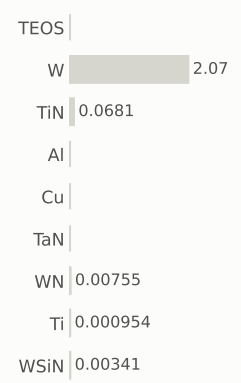

gases emitted (g)

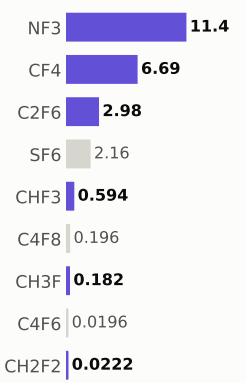

Step #10810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,049.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

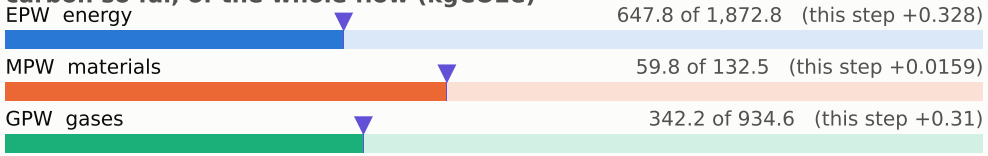

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

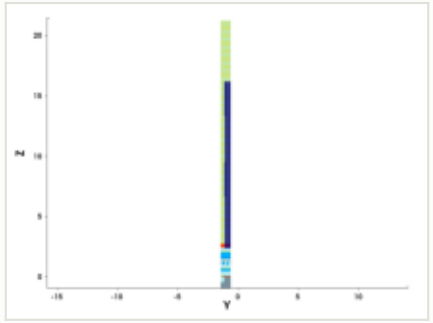

y cut at -1.035 µm

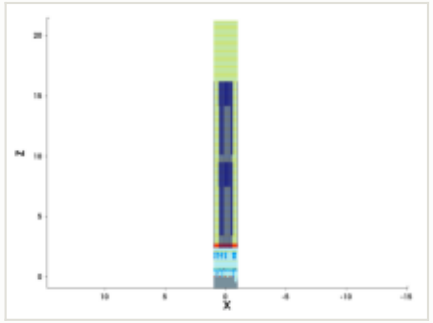

mask for this step

no mask for this step

steps by process area

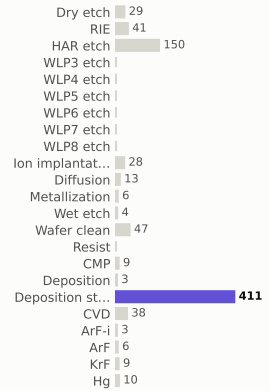

materials deposited (g)

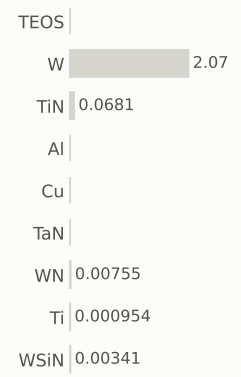

gases emitted (g)

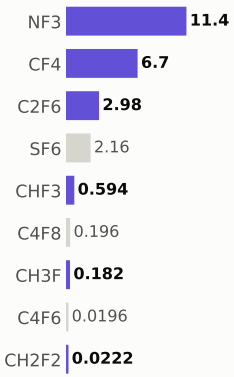

Step #10820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,050.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

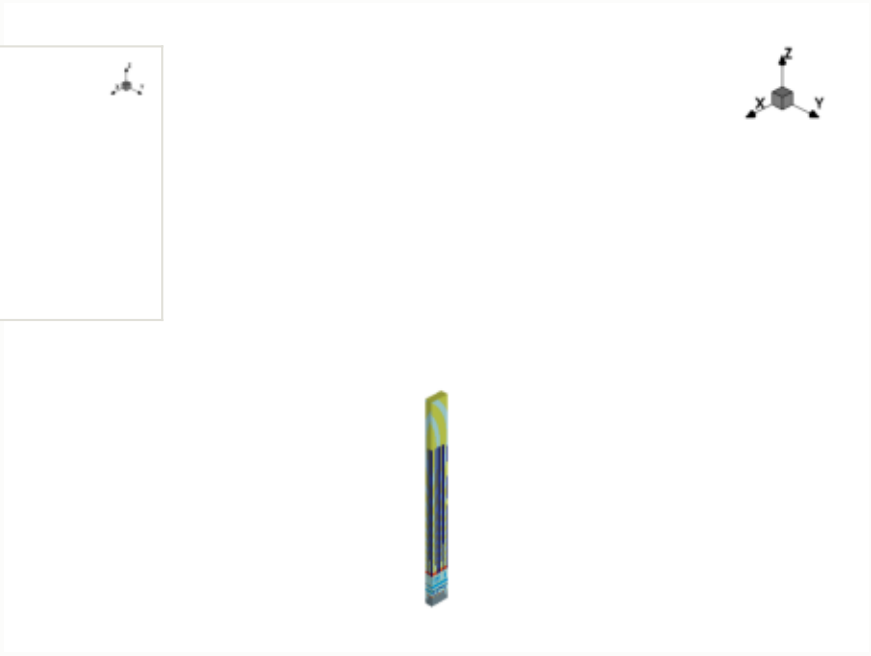

x cut at 0.000 µm

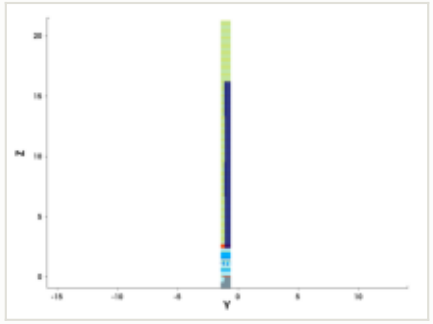

y cut at -1.035 µm

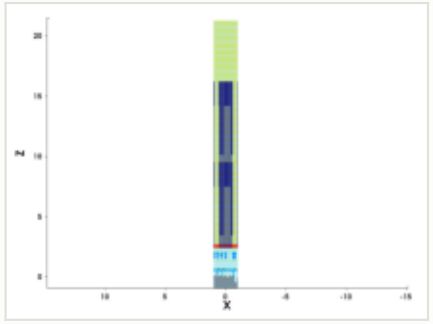

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 648.1 of 1,872.8 (this step +0.328)

MPW materials — 59.8 of 132.5 (this step +0.0159)

GPW gases — 342.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

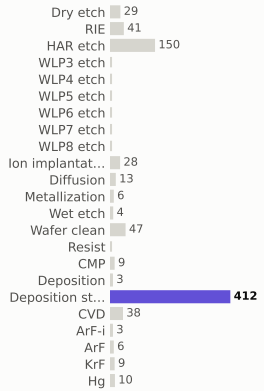

materials deposited (g)

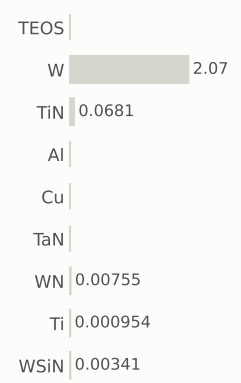

gases emitted (g)



Step #10830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,051.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

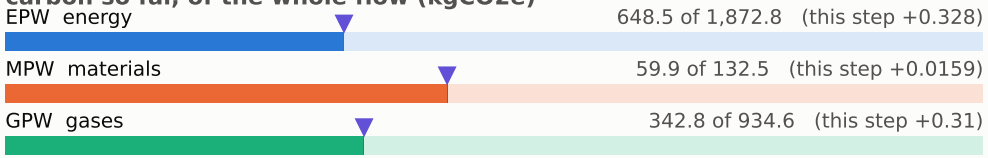

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

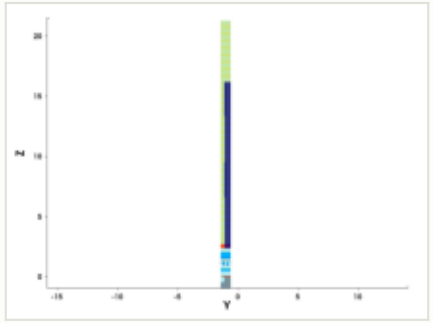

y cut at -1.035 µm

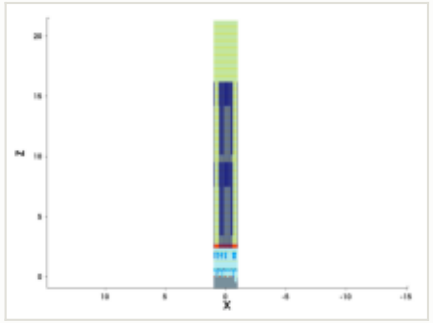

mask for this step

no mask for this step

steps by process area

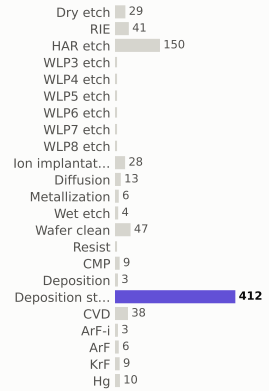

materials deposited (g)

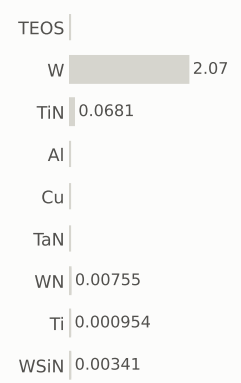

gases emitted (g)

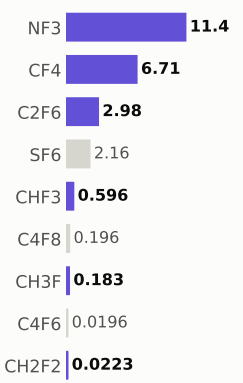

Step #10840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,051.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

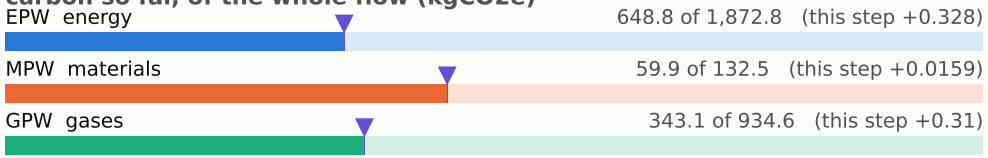

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

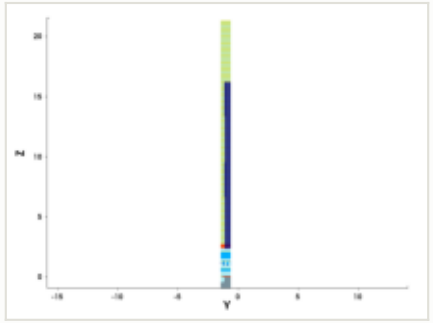

y cut at -1.035 µm

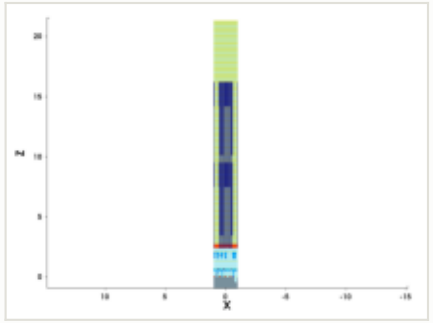

mask for this step

no mask for this step

steps by process area

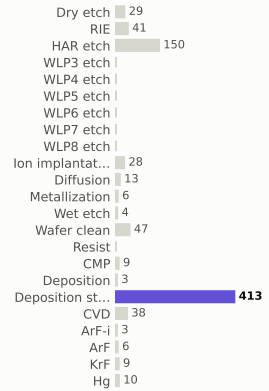

materials deposited (g)

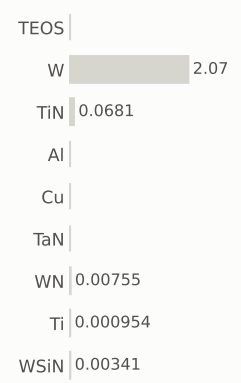

gases emitted (g)



Step #10850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,052.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

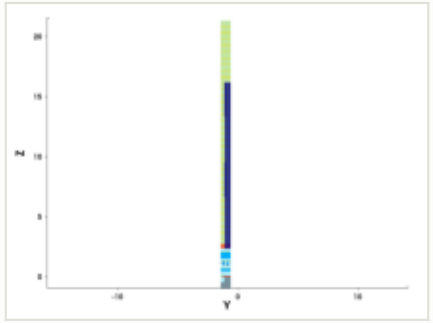

y cut at -1.035 µm

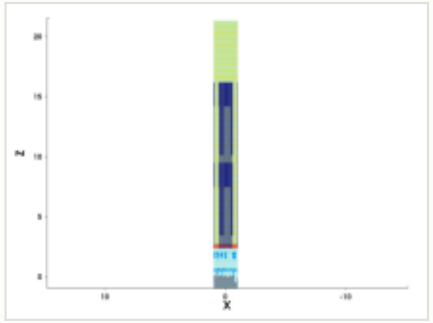

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

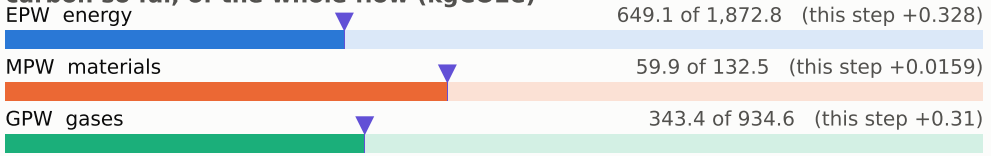

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

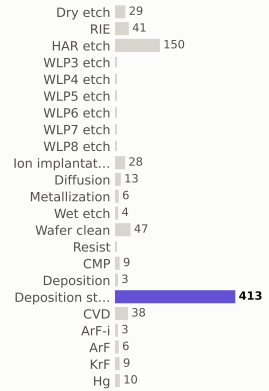

materials deposited (g)

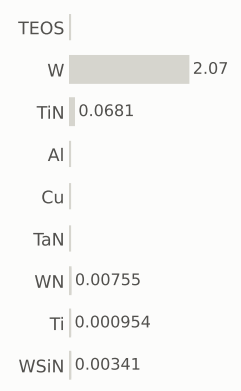

gases emitted (g)

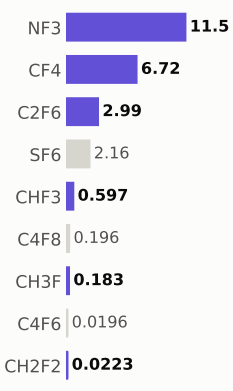

Step #10860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,053.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

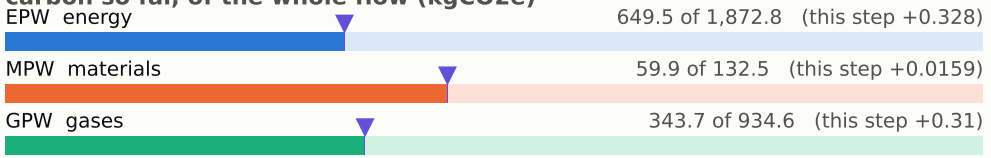

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

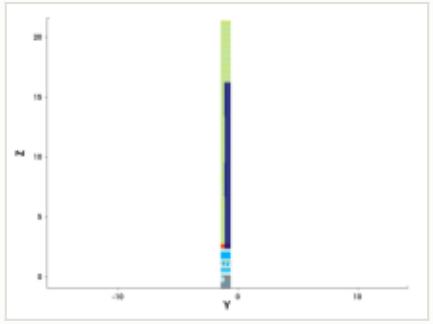

y cut at -1.035 µm

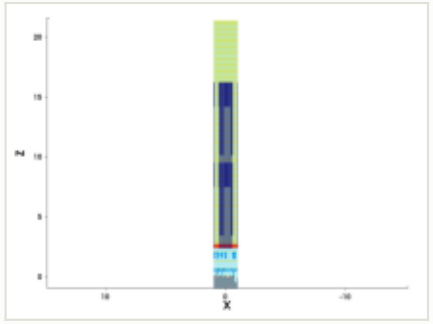

mask for this step

no mask for this step

steps by process area

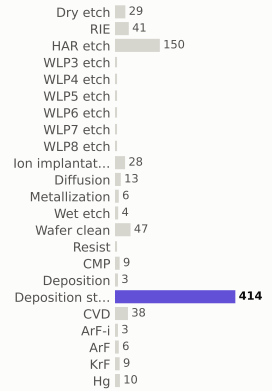

materials deposited (g)

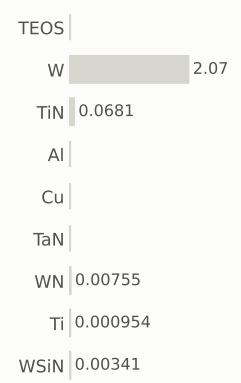

gases emitted (g)

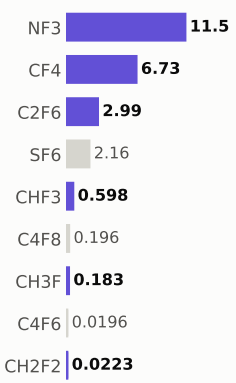

Step #10870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,053.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

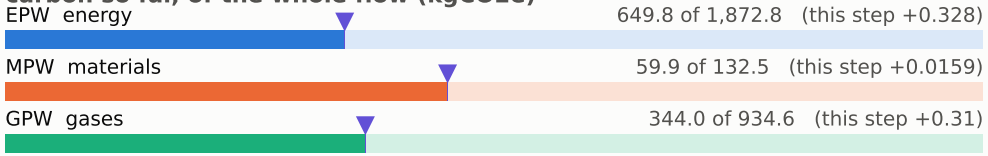

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

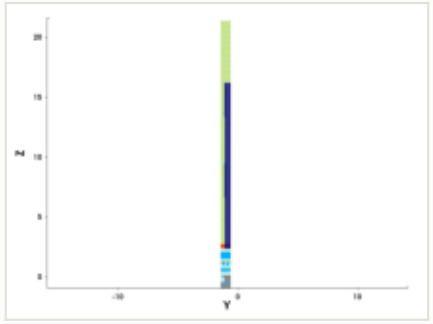

y cut at -1.035 µm

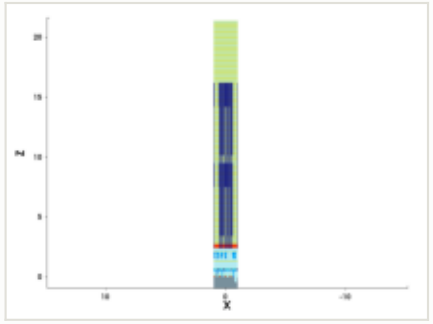

mask for this step

no mask for this step

steps by process area

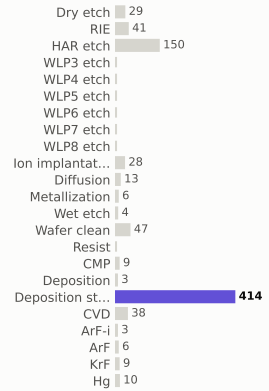

materials deposited (g)

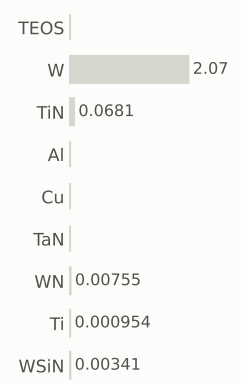

gases emitted (g)

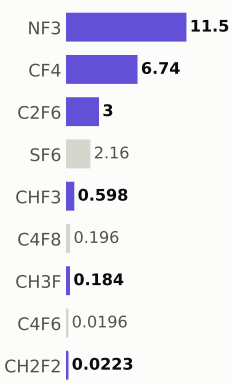

Step #10880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,054.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

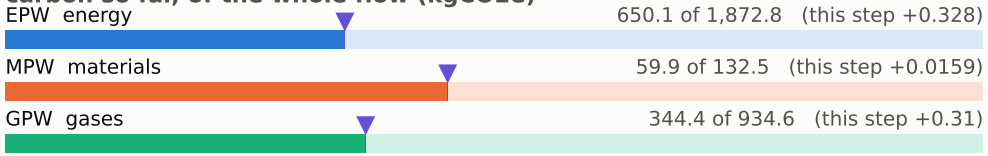

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

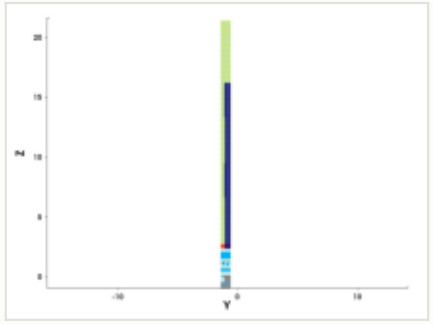

y cut at -1.035 µm

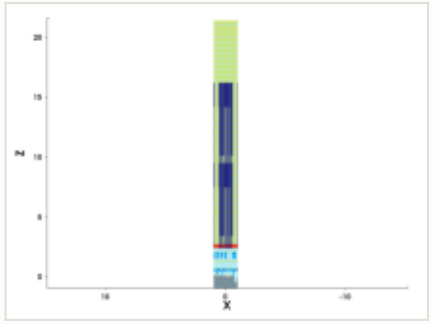

mask for this step

no mask for this step

steps by process area

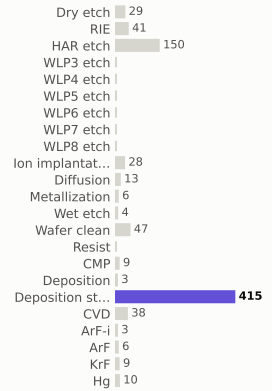

materials deposited (g)

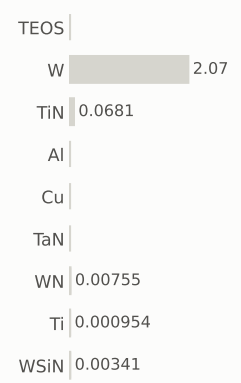

gases emitted (g)

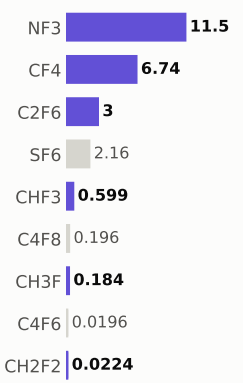

Step #10890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,055.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

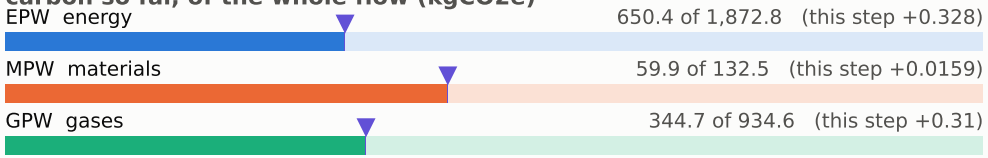

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

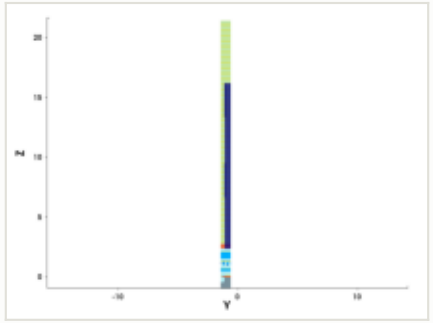

y cut at -1.035 µm

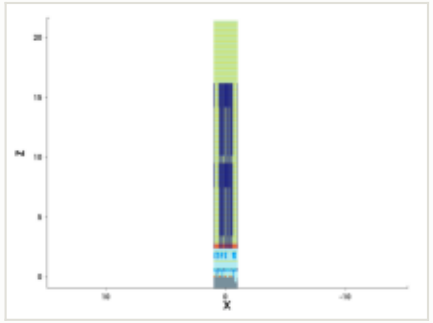

mask for this step

no mask for this step

steps by process area

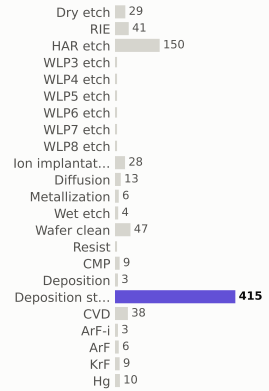

materials deposited (g)

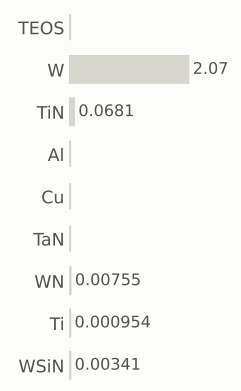

gases emitted (g)

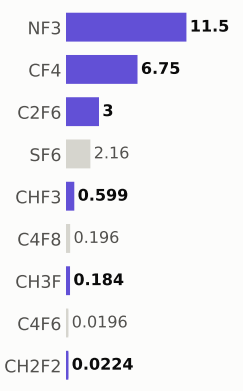

Step #10900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,055.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

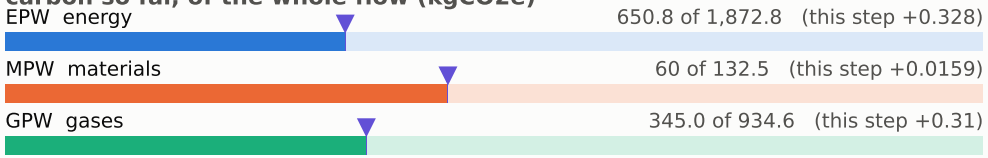

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

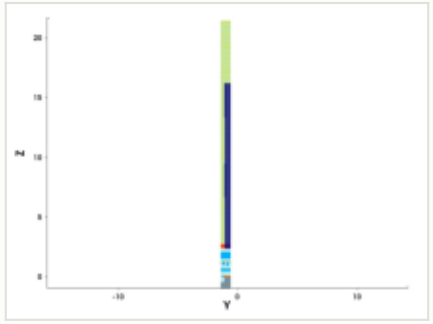

y cut at -1.035 µm

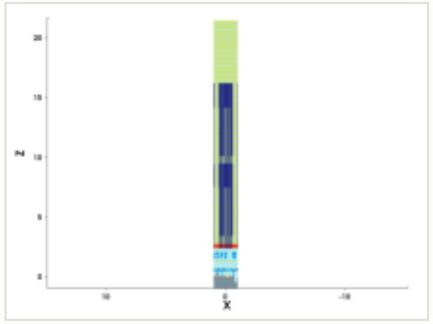

mask for this step

no mask for this step

steps by process area

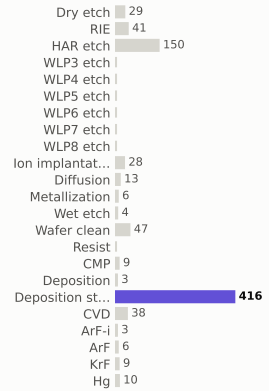

materials deposited (g)

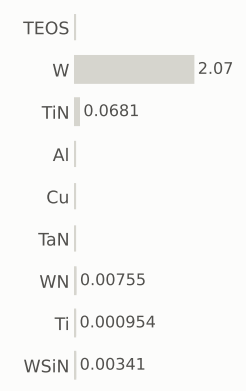

gases emitted (g)

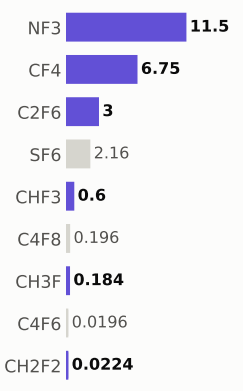

Step #10910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,056.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

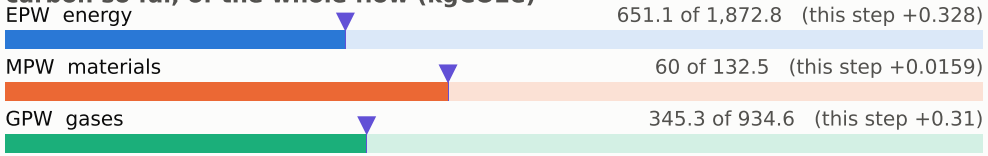

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

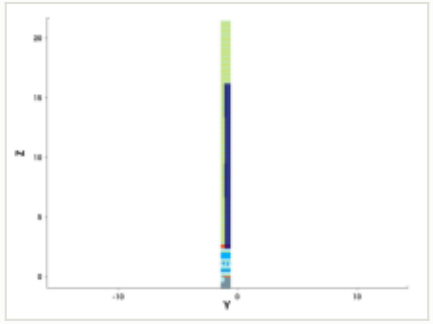

y cut at -1.035 µm

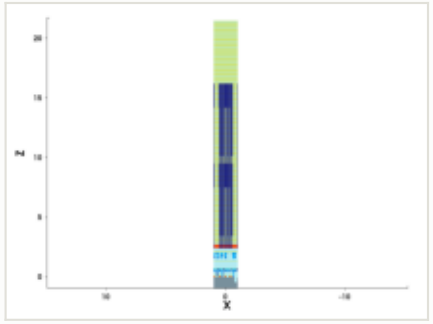

mask for this step

no mask for this step

steps by process area

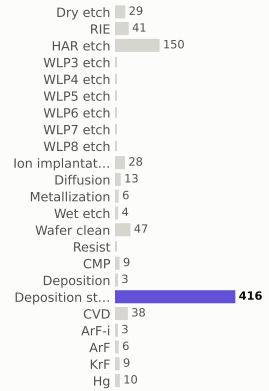

materials deposited (g)

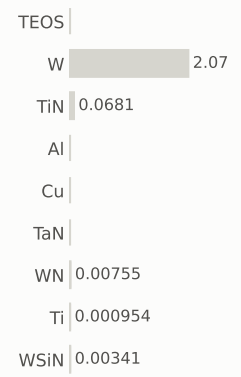

gases emitted (g)

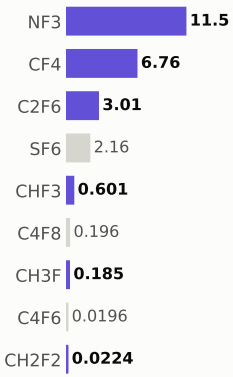

Step #10920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,057.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

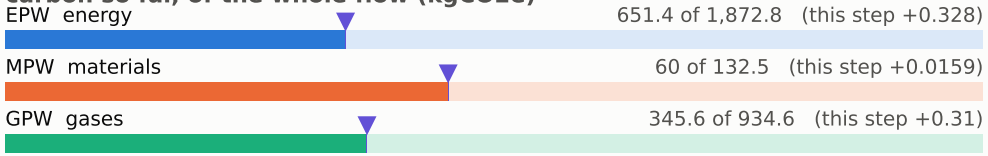

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

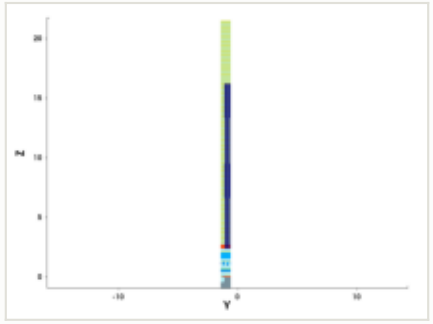

y cut at -1.035 µm

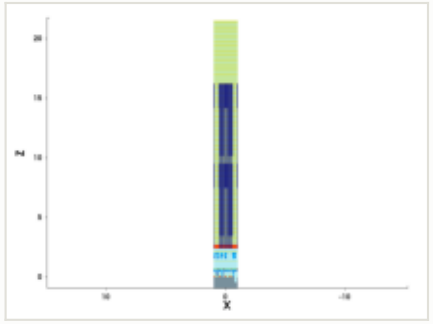

mask for this step

no mask for this step

steps by process area

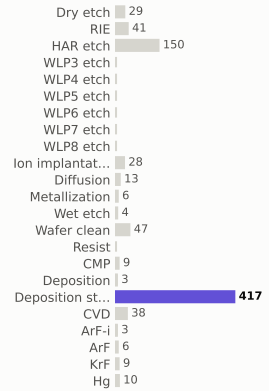

materials deposited (g)

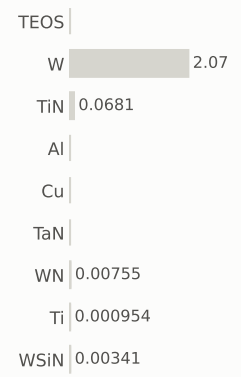

gases emitted (g)

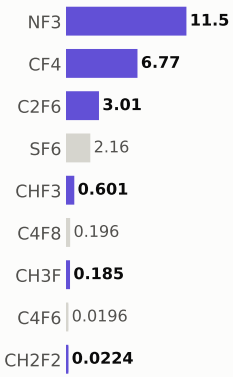

Step #10930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,057.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

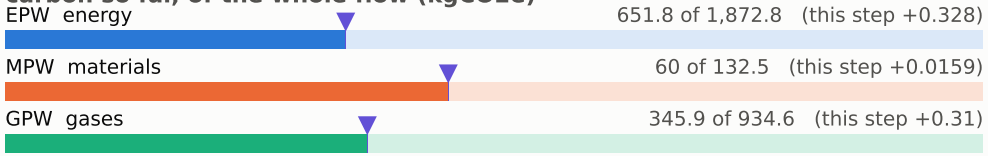

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

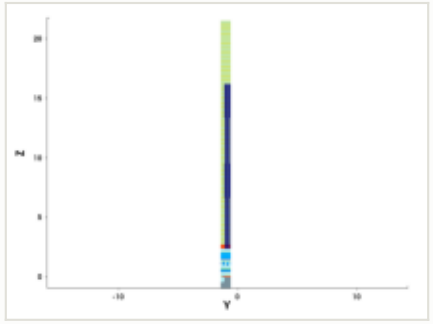

y cut at -1.035 µm

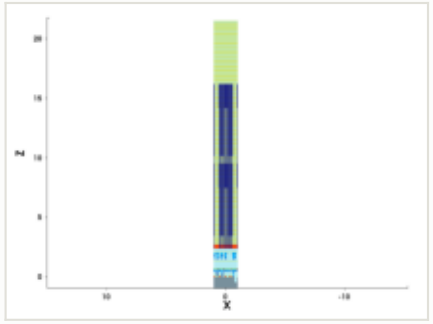

mask for this step

no mask for this step

steps by process area

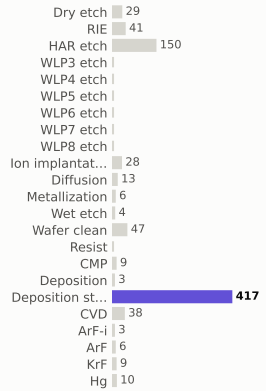

materials deposited (g)

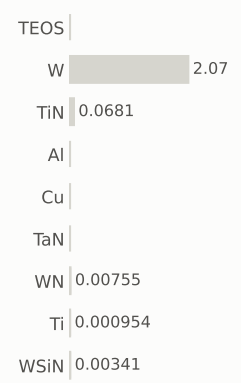

gases emitted (g)

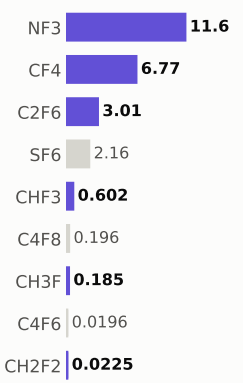

Step #10940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,058.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

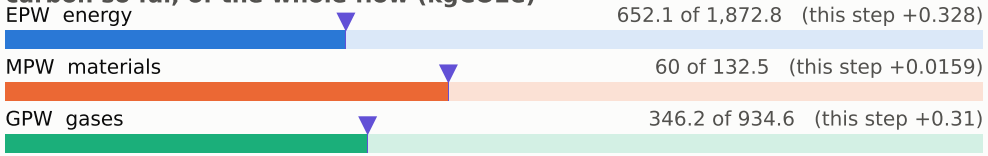

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

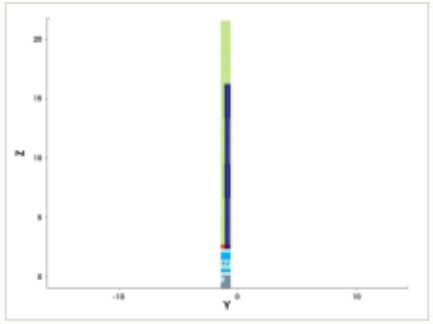

y cut at -1.035 µm

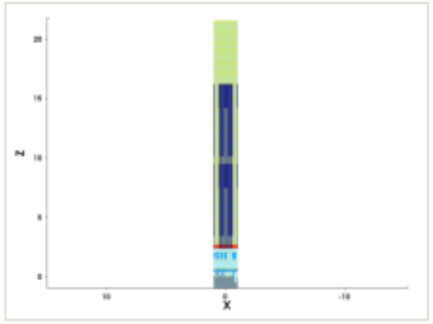

mask for this step

no mask for this step

steps by process area

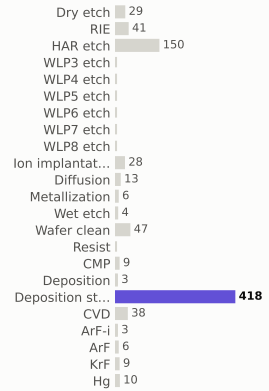

materials deposited (g)

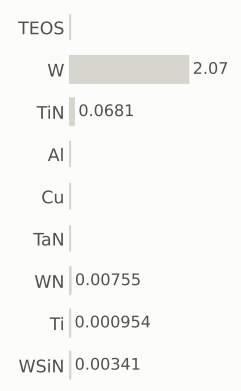

gases emitted (g)

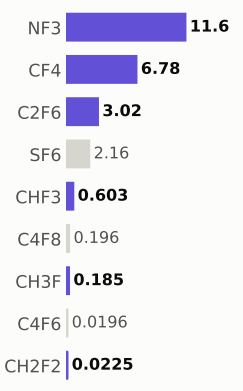

Step #10950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,059.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

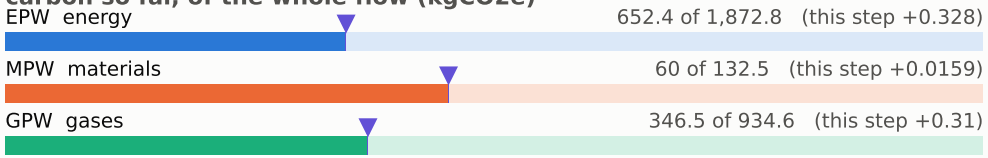

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

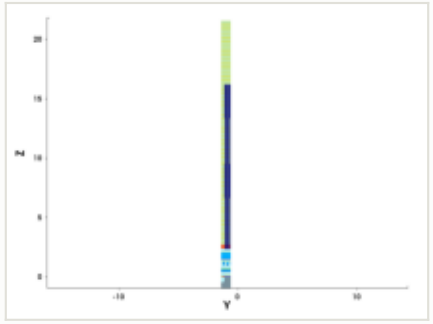

y cut at -1.035 µm

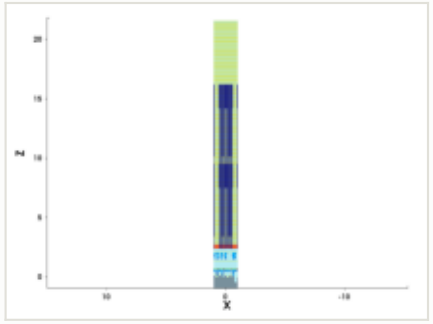

mask for this step

no mask for this step

steps by process area

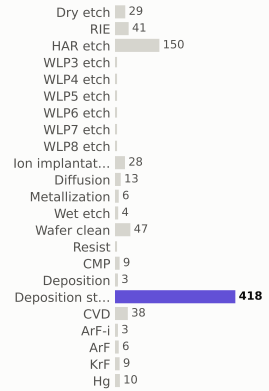

materials deposited (g)

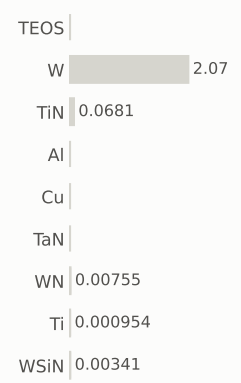

gases emitted (g)

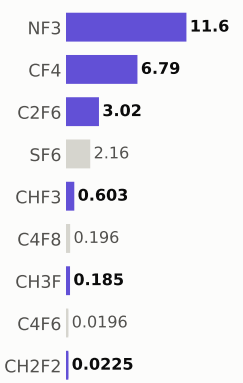

Step #10960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,059.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

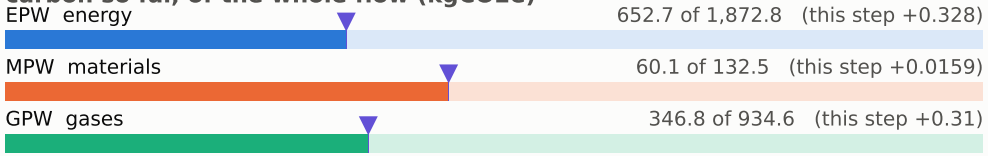

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

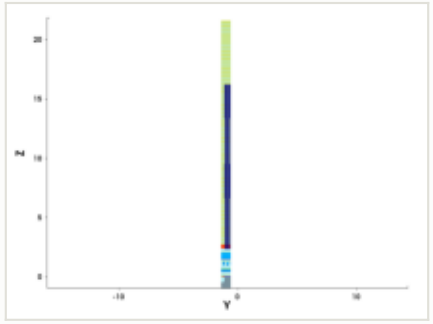

y cut at -1.035 µm

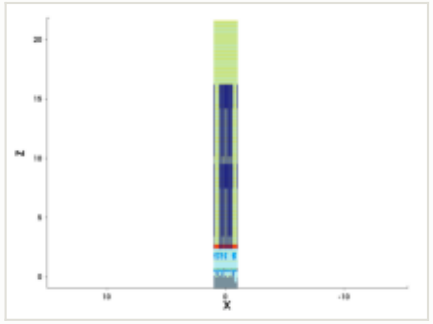

mask for this step

no mask for this step

steps by process area

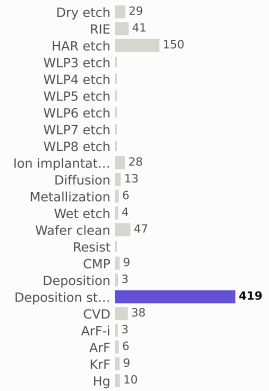

materials deposited (g)

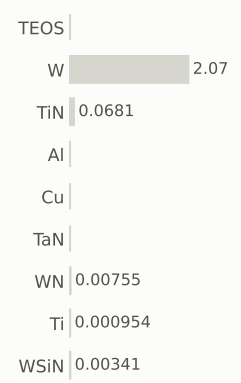

gases emitted (g)

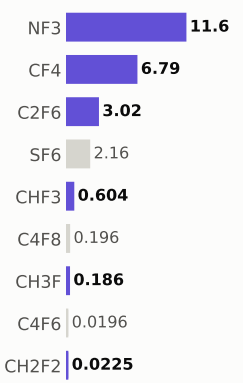

Step #10970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,060.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

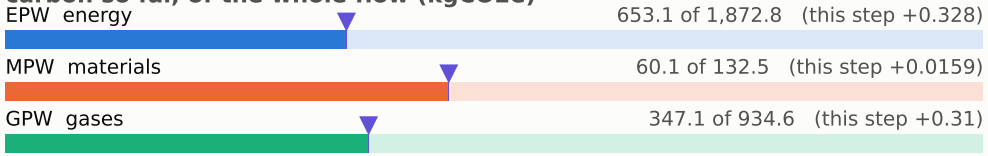

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

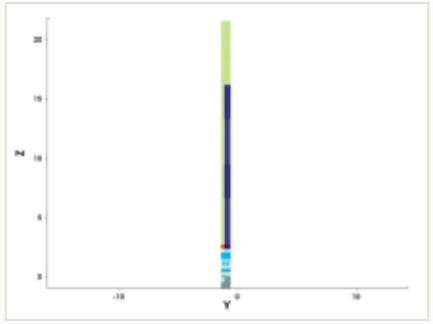

y cut at -1.035 µm

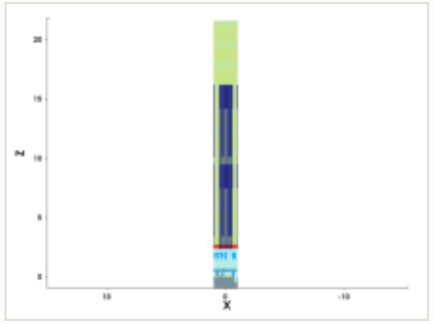

mask for this step

no mask for this step

steps by process area

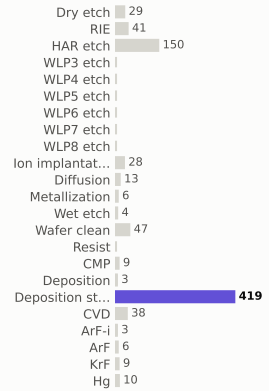

materials deposited (g)

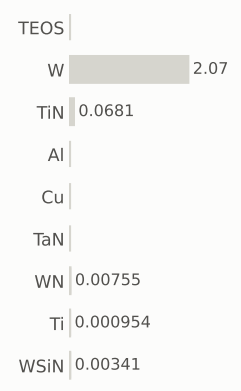

gases emitted (g)

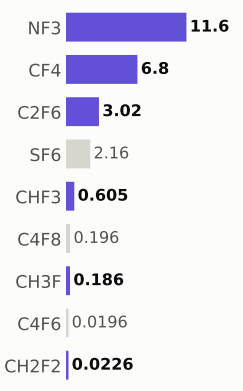

Step #10980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,060.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

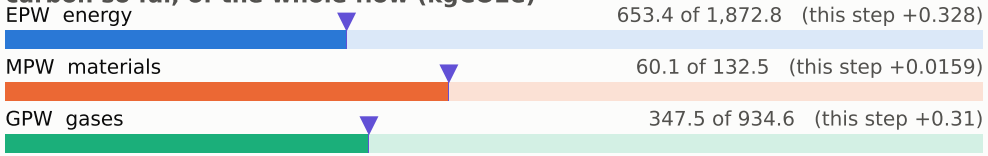

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

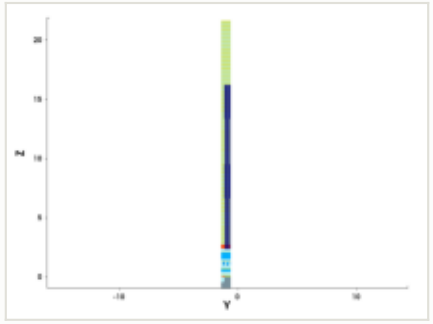

y cut at -1.035 µm

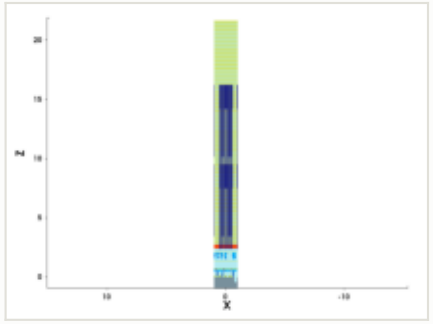

mask for this step

no mask for this step

steps by process area

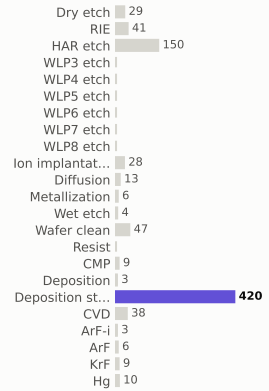

materials deposited (g)

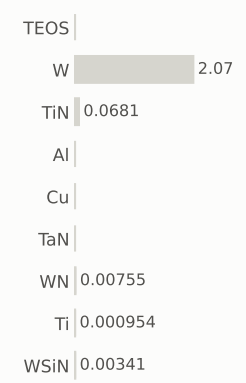

gases emitted (g)

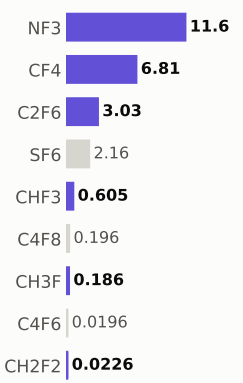

Step #10990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,061.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

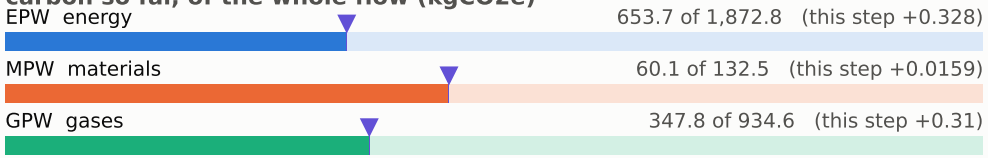

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

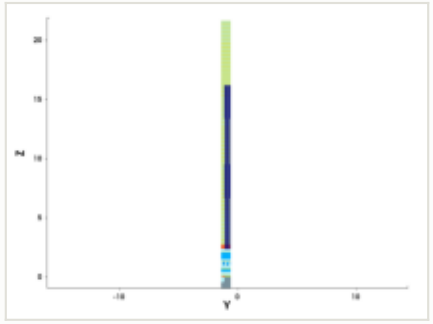

y cut at -1.035 µm

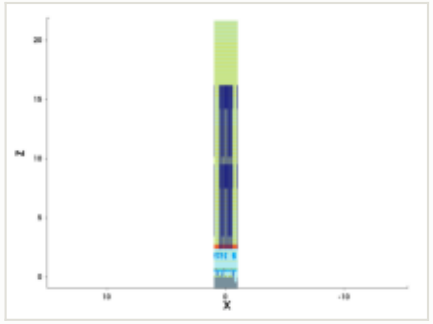

mask for this step

no mask for this step

steps by process area

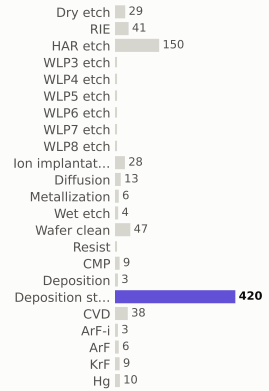

materials deposited (g)

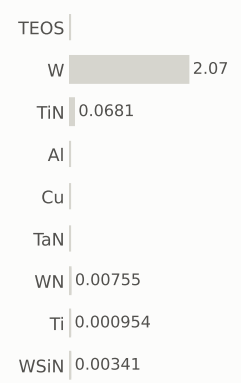

gases emitted (g)

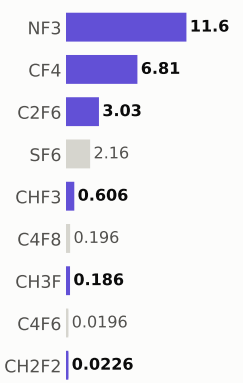

Step #11000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,062.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

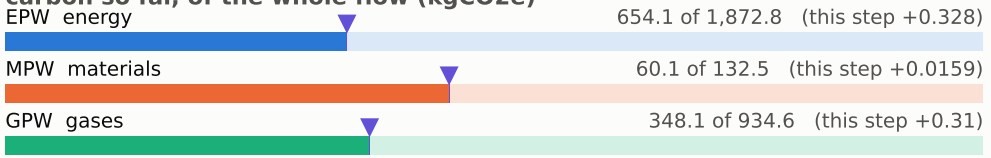

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

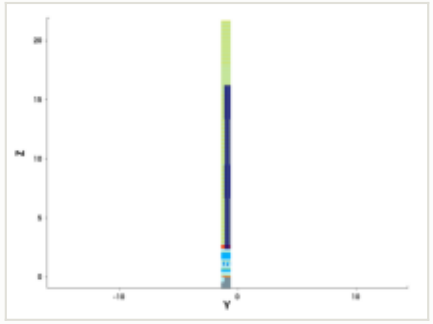

y cut at -1.035 µm

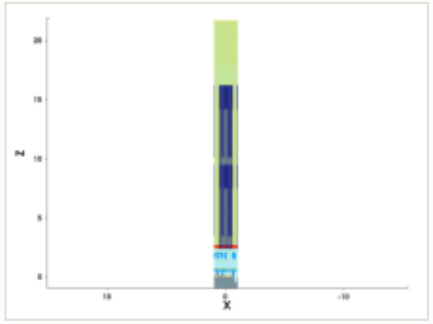

mask for this step

no mask for this step

steps by process area

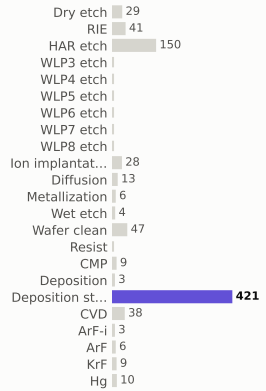

materials deposited (g)

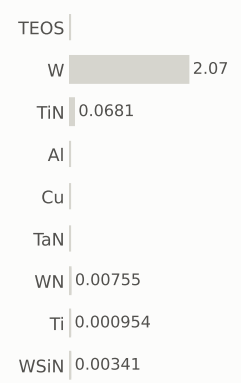

gases emitted (g)

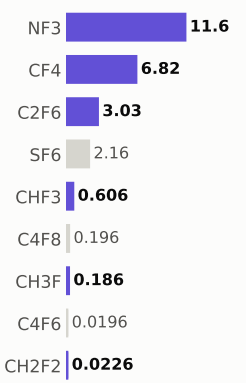

Step #11010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,062.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

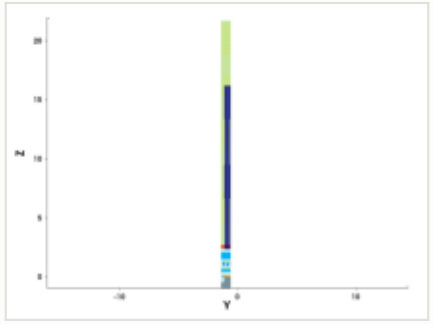

y cut at -1.035 µm

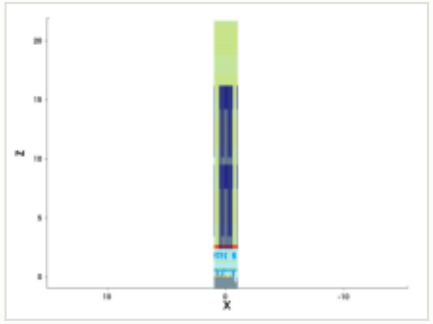

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 654.4 of 1,872.8 (this step +0.328)

MPW materials — 60.1 of 132.5 (this step +0.0159)

GPW gases — 348.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

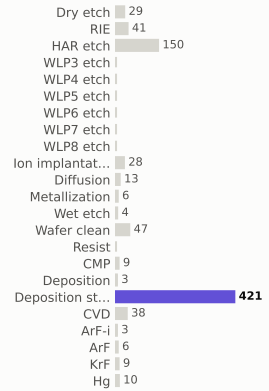

materials deposited (g)

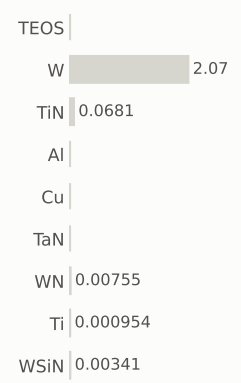

gases emitted (g)

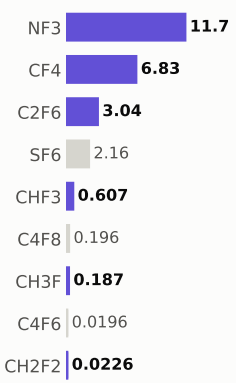

Step #11020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,063.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

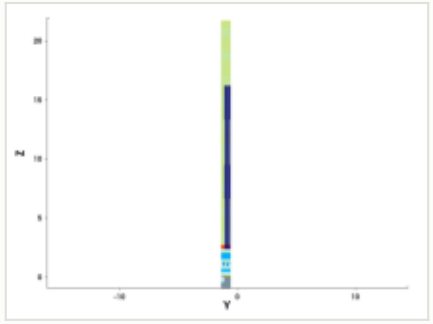

y cut at -1.035 µm

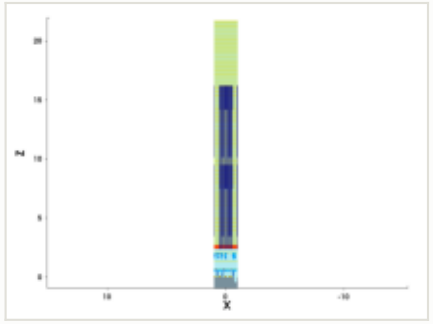

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 654.7 of 1,872.8 (this step +0.328)

MPW materials — 60.2 of 132.5 (this step +0.0159)

GPW gases — 348.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

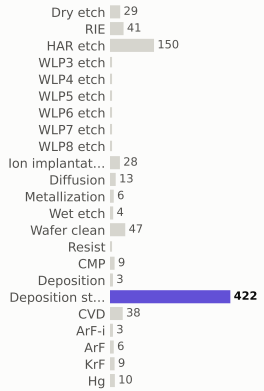

materials deposited (g)

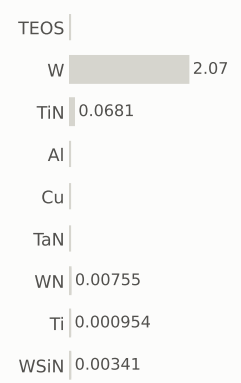

gases emitted (g)

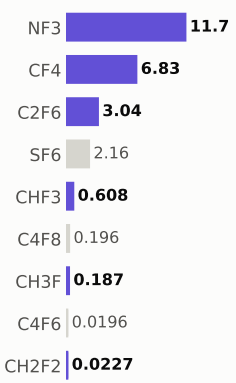

Step #11030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,064.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

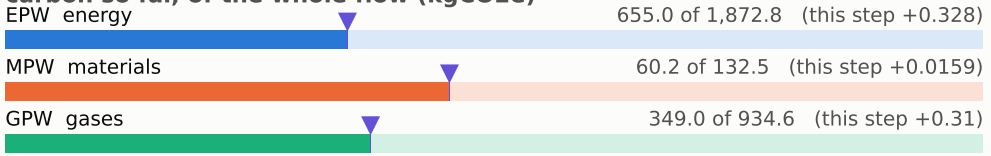

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

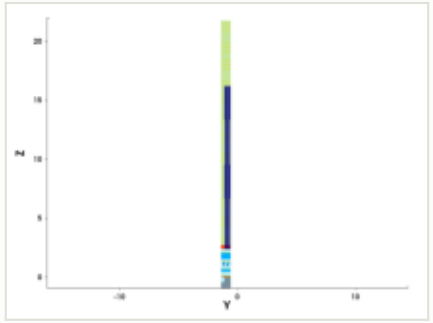

y cut at -1.035 µm

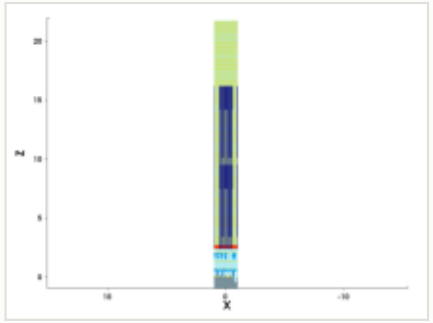

mask for this step

no mask for this step

steps by process area

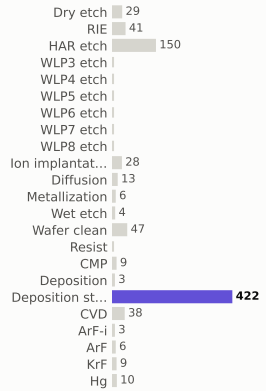

materials deposited (g)

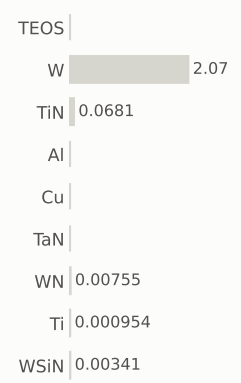

gases emitted (g)

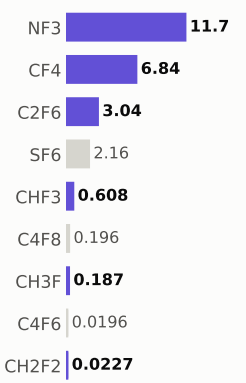

Step #11040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,064.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

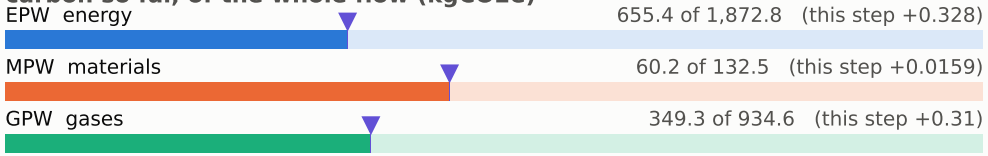

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

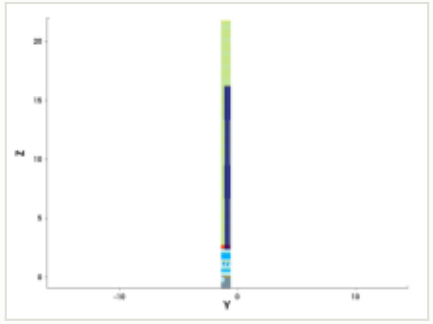

y cut at -1.035 µm

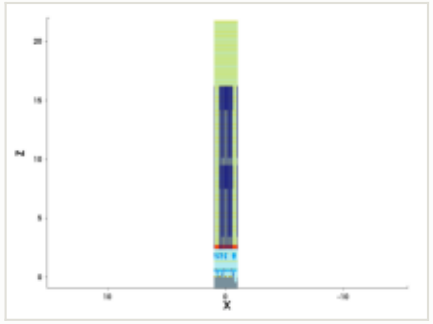

mask for this step

no mask for this step

steps by process area

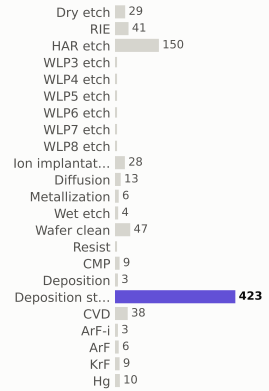

materials deposited (g)

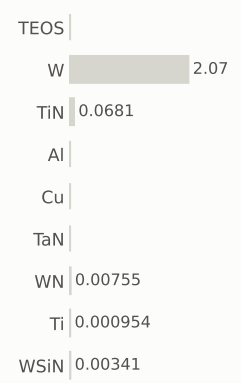

gases emitted (g)

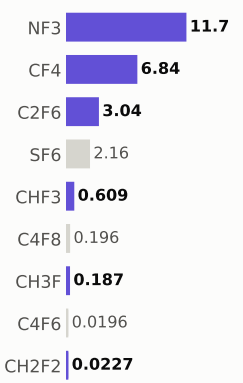

Step #11050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,065.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

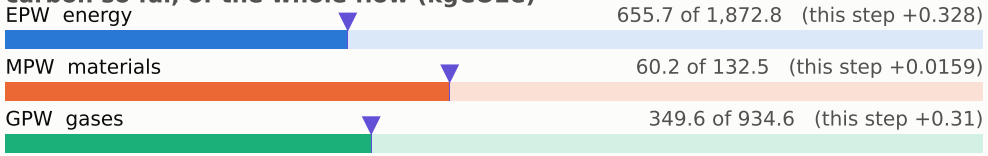

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

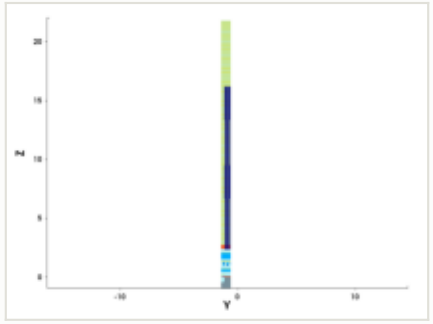

y cut at -1.035 µm

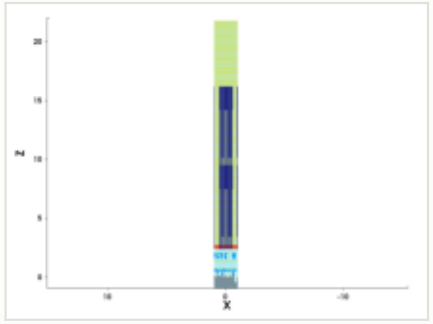

mask for this step

no mask for this step

steps by process area

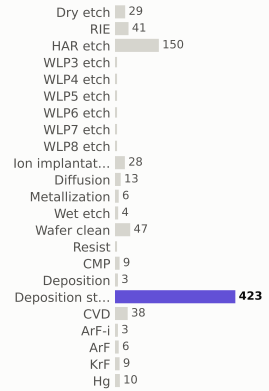

materials deposited (g)

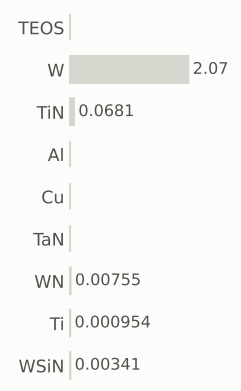

gases emitted (g)

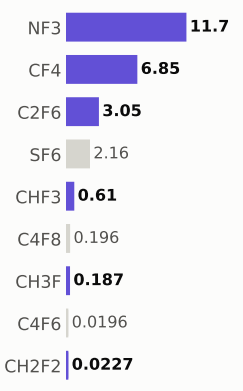

Step #11060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,066.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

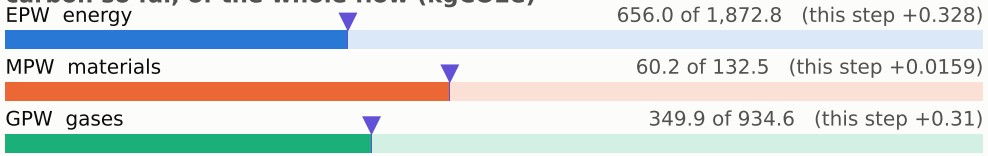

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

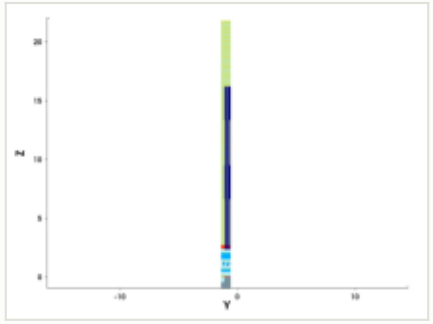

y cut at -1.035 µm

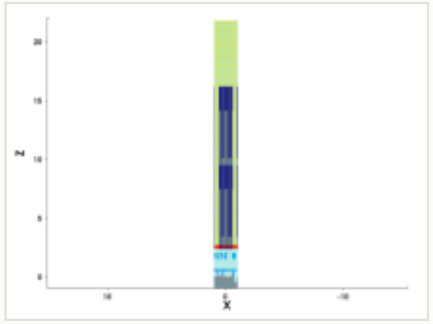

mask for this step

no mask for this step

steps by process area

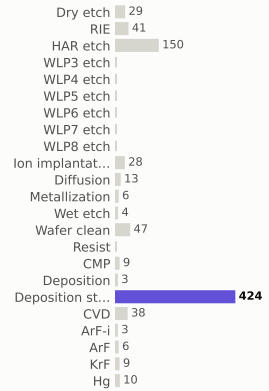

materials deposited (g)

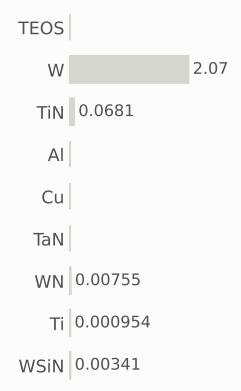

gases emitted (g)

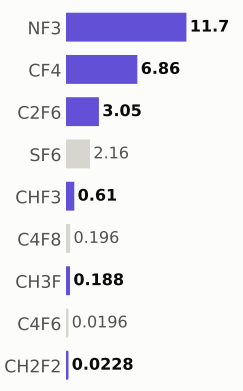

Step #11070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,066.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

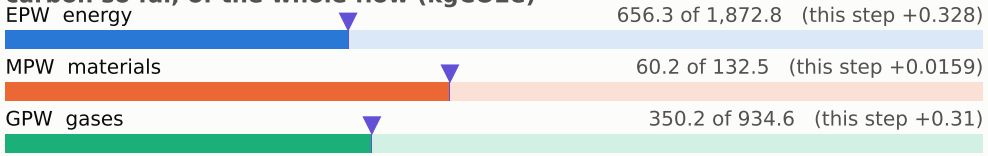

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

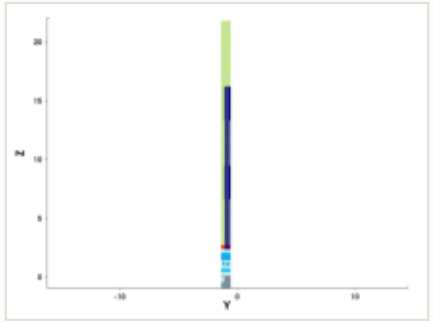

y cut at -1.035 µm

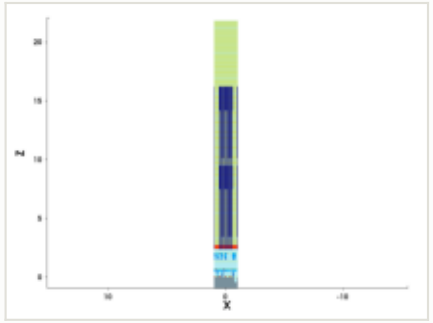

mask for this step

no mask for this step

steps by process area

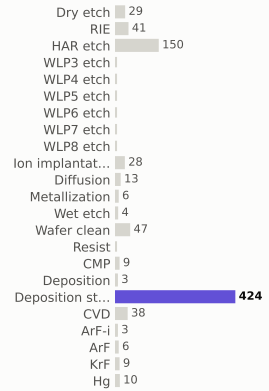

materials deposited (g)

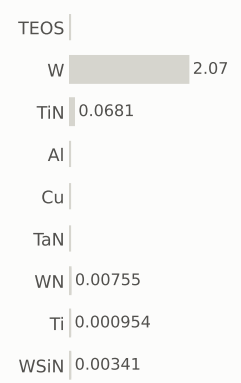

gases emitted (g)

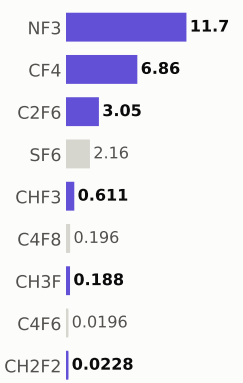

Step #11080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,067.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

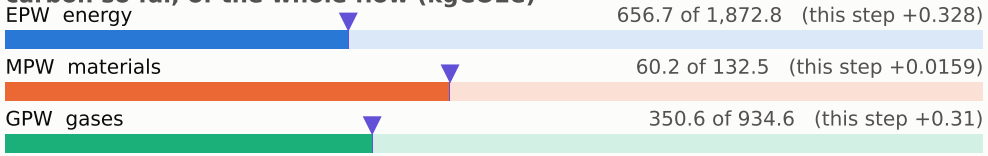

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

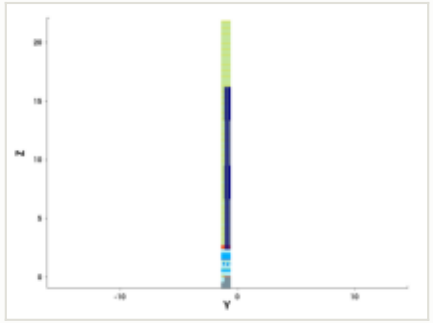

y cut at -1.035 µm

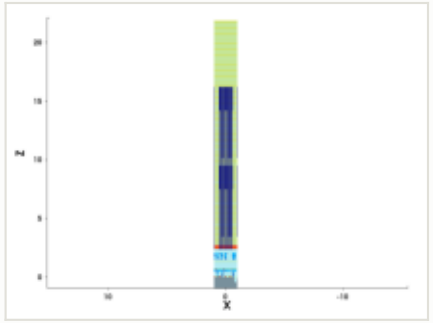

mask for this step

no mask for this step

steps by process area

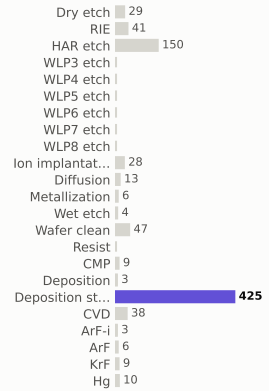

materials deposited (g)

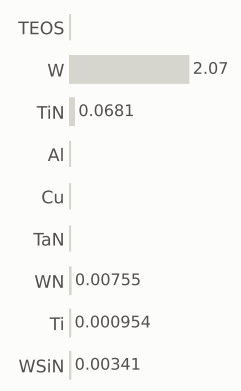

gases emitted (g)

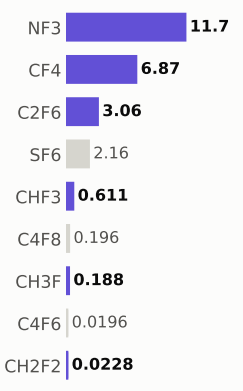

Step #11090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,068.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

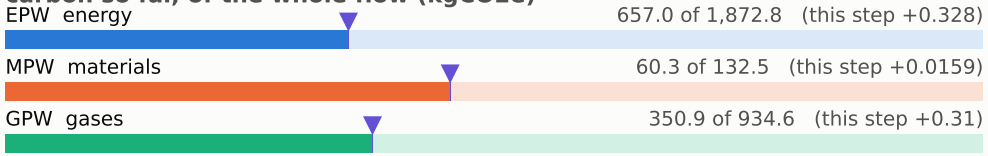

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

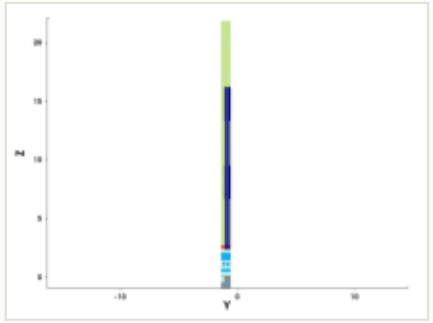

y cut at -1.035 µm

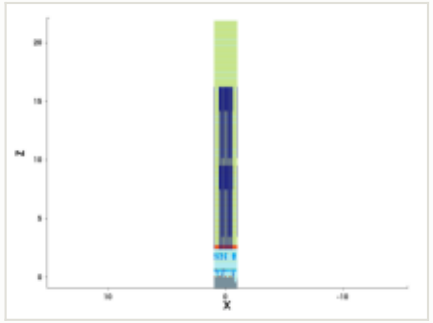

mask for this step

no mask for this step

steps by process area

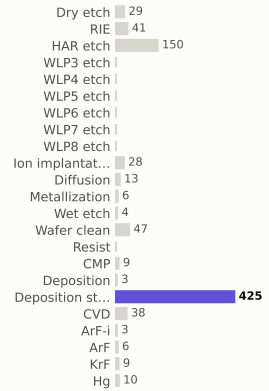

materials deposited (g)

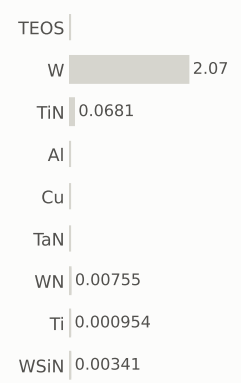

gases emitted (g)



Step #11100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,068.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 657.3 of 1,872.8 (this step +0.328)

MPW materials — 60.3 of 132.5 (this step +0.0159)

GPW gases — 351.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

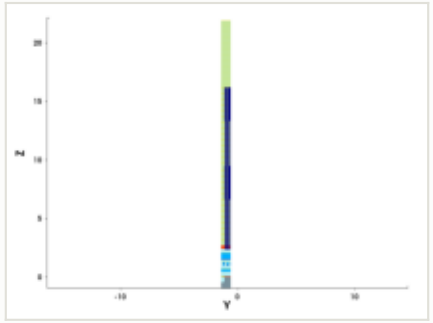

y cut at -1.035 µm

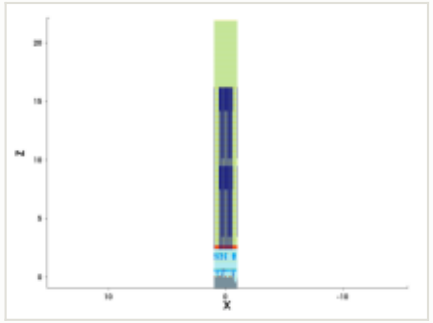

mask for this step

no mask for this step

steps by process area

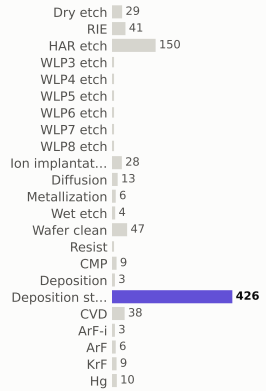

materials deposited (g)

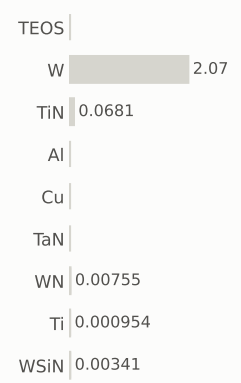

gases emitted (g)



Step #11110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,069.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

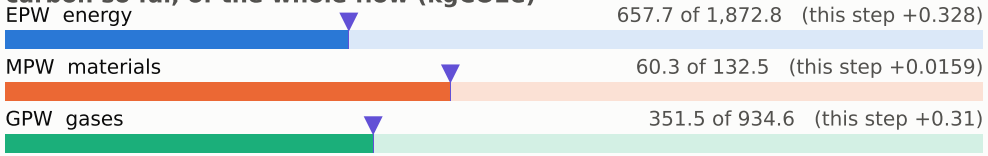

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

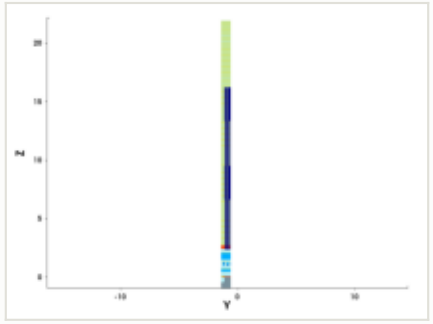

y cut at -1.035 µm

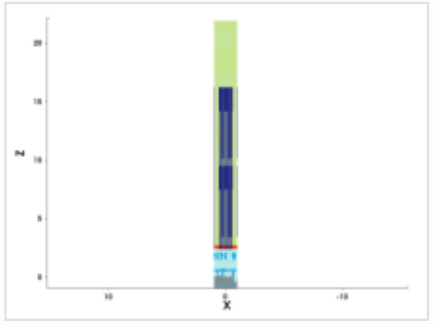

mask for this step

no mask for this step

steps by process area

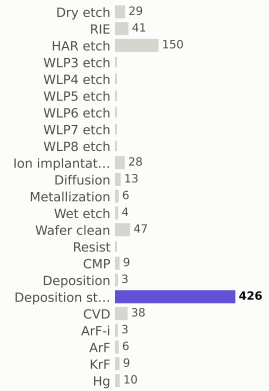

materials deposited (g)

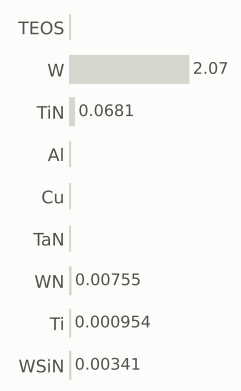

gases emitted (g)

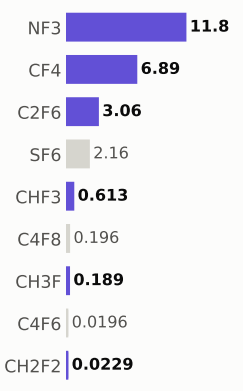

Step #11120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,070.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

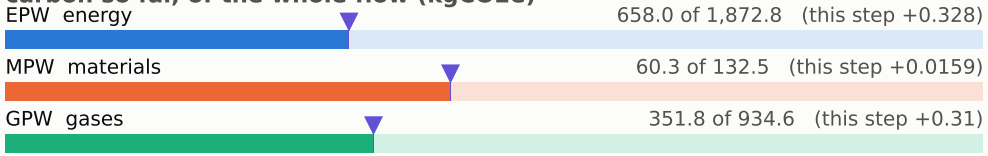

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

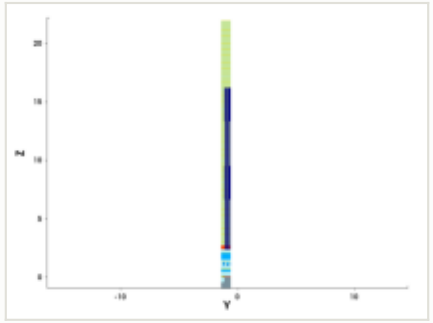

y cut at -1.035 µm

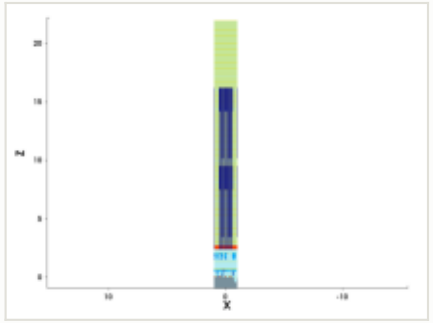

mask for this step

no mask for this step

steps by process area

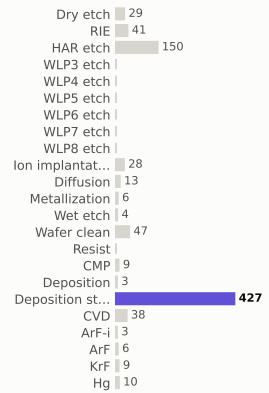

materials deposited (g)

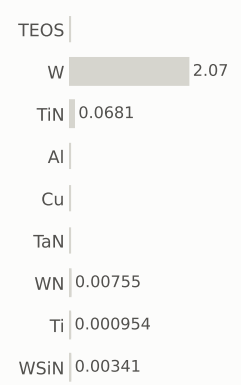

gases emitted (g)

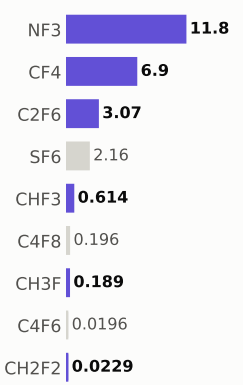

Step #11130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,070.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

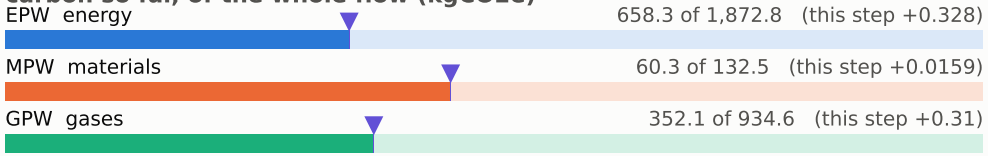

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

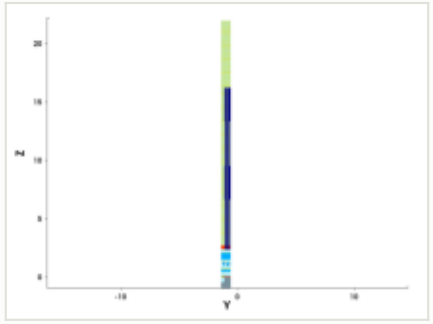

y cut at -1.035 µm

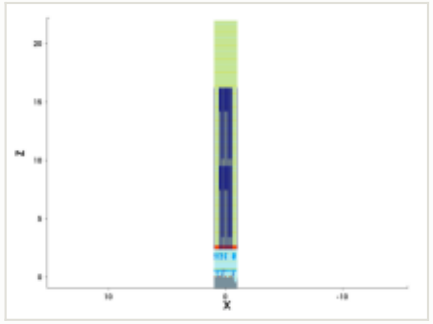

mask for this step

no mask for this step

steps by process area

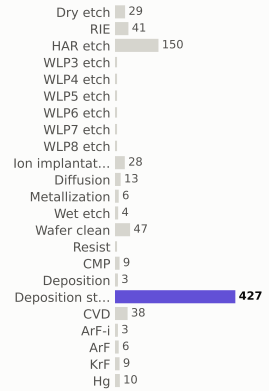

materials deposited (g)

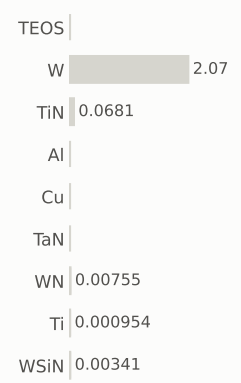

gases emitted (g)

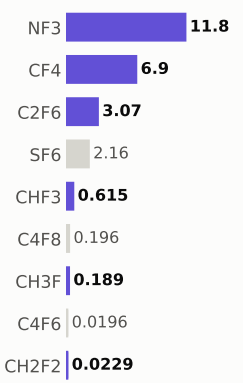

Step #11140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,071.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

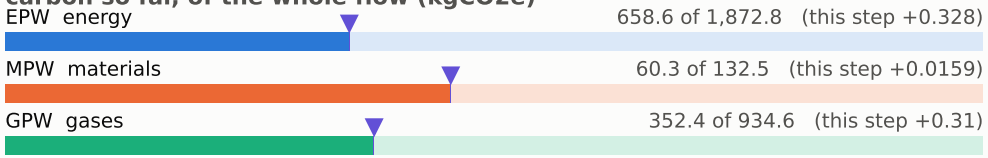

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

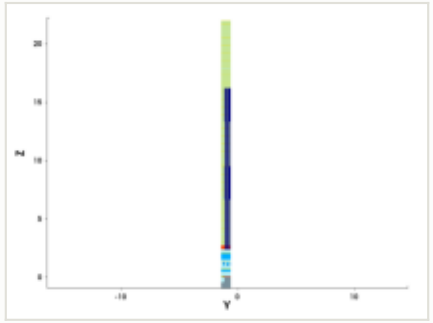

y cut at -1.035 µm

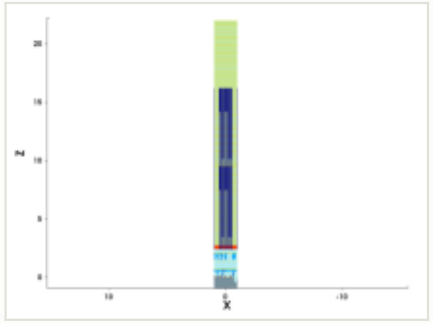

mask for this step

no mask for this step

steps by process area

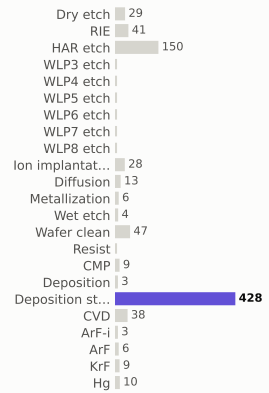

materials deposited (g)

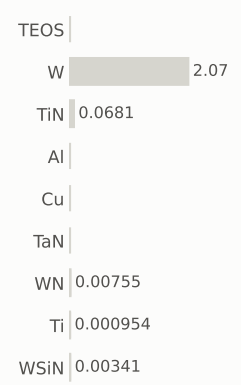

gases emitted (g)

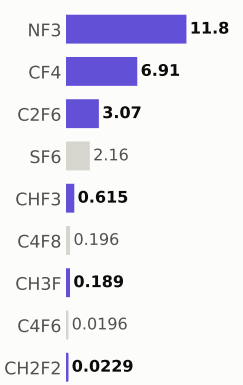

Step #11150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,072.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

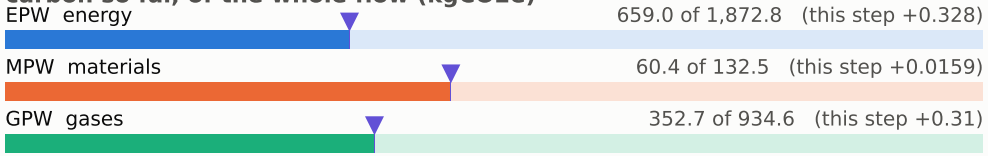

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

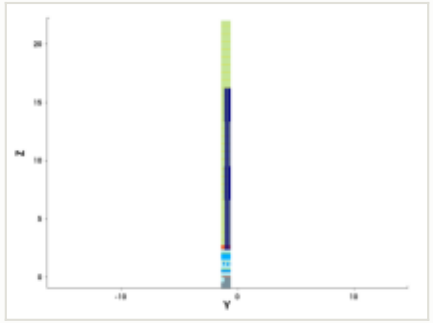

y cut at -1.035 µm

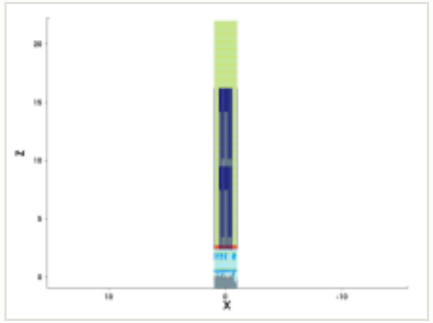

mask for this step

no mask for this step

steps by process area

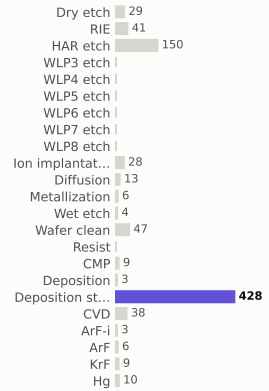

materials deposited (g)

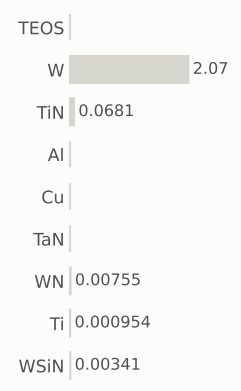

gases emitted (g)

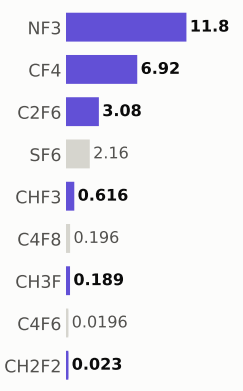

Step #11160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,072.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

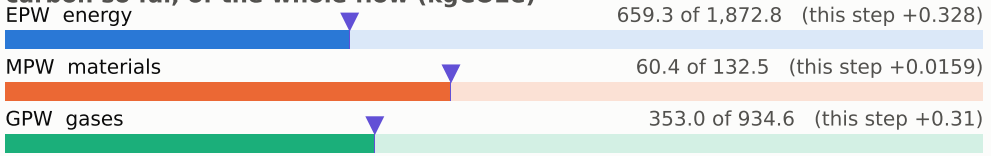

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

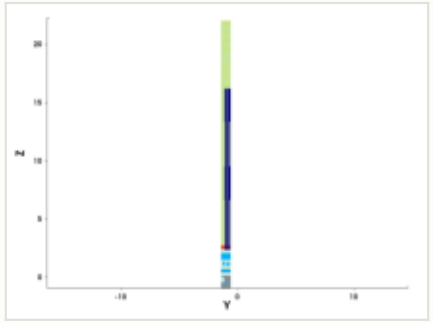

y cut at -1.035 µm

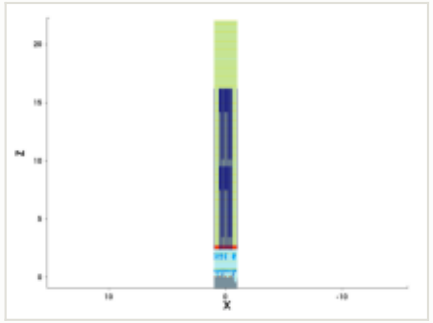

mask for this step

no mask for this step

steps by process area

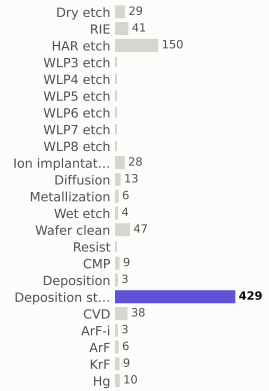

materials deposited (g)

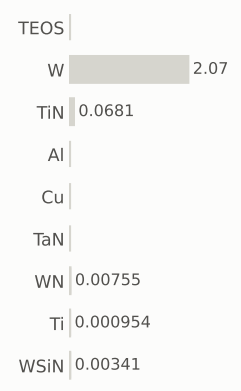

gases emitted (g)

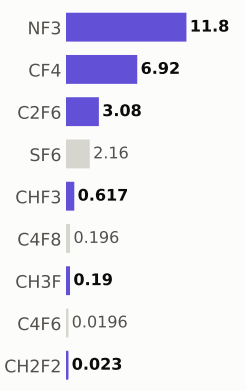

Step #11170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,073.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

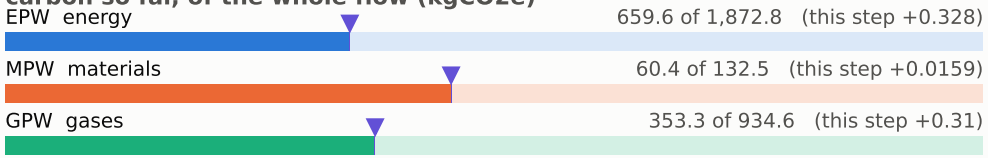

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

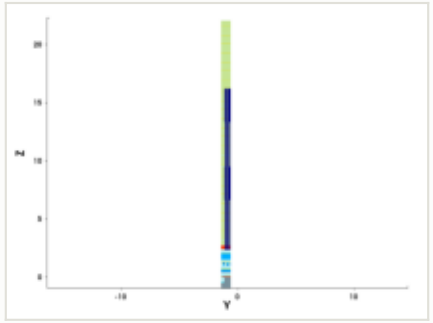

y cut at -1.035 µm

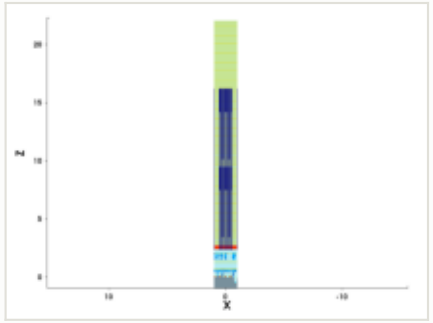

mask for this step

no mask for this step

steps by process area

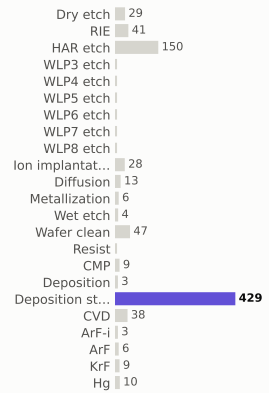

materials deposited (g)

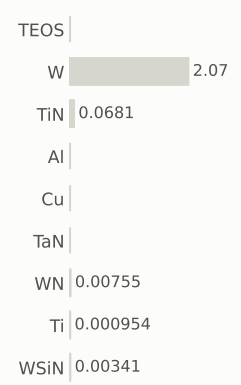

gases emitted (g)

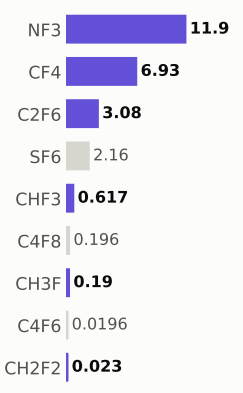

Step #11180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,074.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

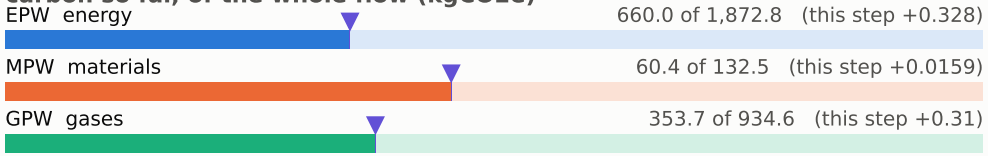

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

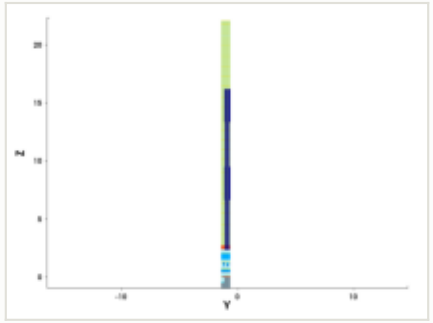

y cut at -1.035 µm

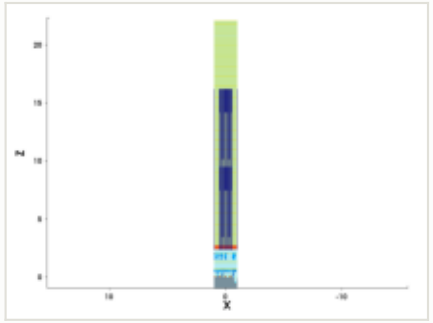

mask for this step

no mask for this step

steps by process area

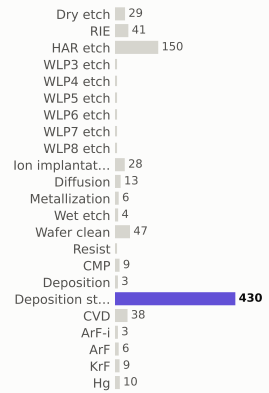

materials deposited (g)

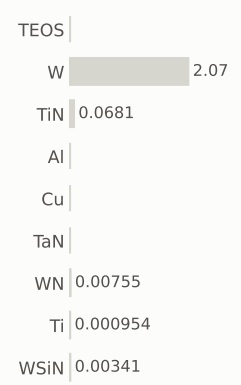

gases emitted (g)

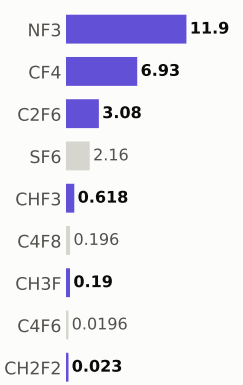

Step #11190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,074.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 660.3 of 1,872.8 (this step +0.328)

MPW materials — 60.4 of 132.5 (this step +0.0159)

GPW gases — 354.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

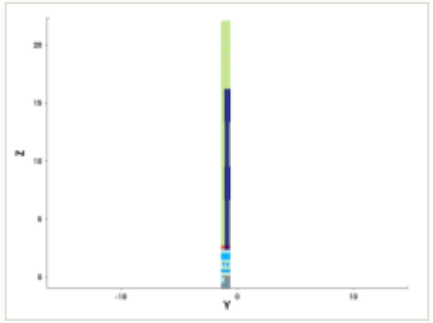

y cut at -1.035 µm

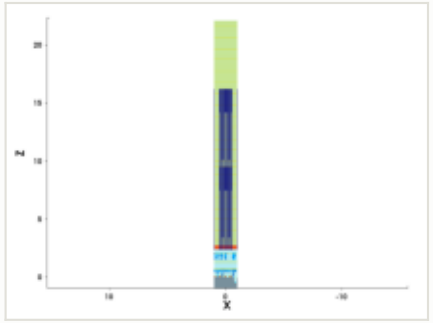

mask for this step

no mask for this step

steps by process area

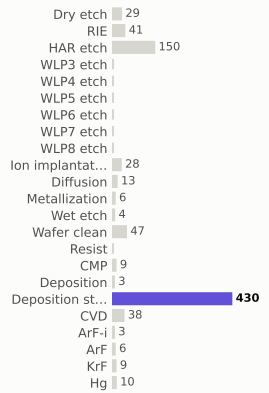

materials deposited (g)

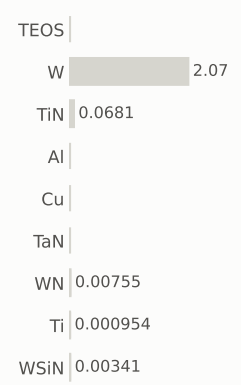

gases emitted (g)

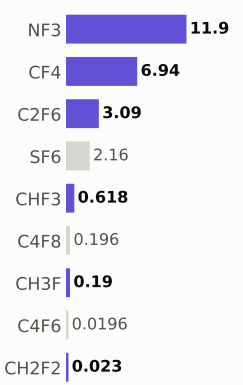

Step #11200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,075.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

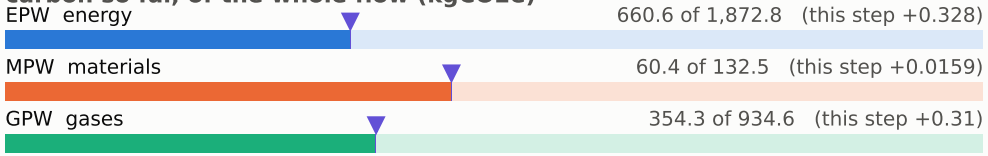

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

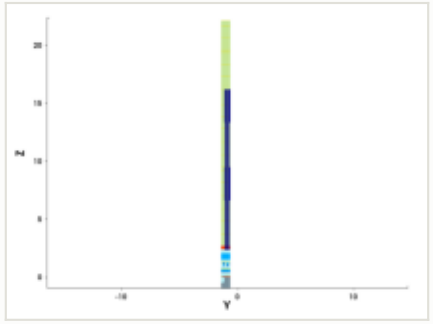

y cut at -1.035 µm

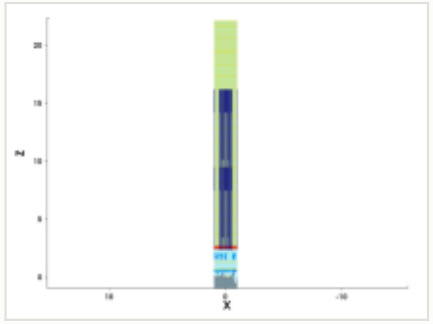

mask for this step

no mask for this step

steps by process area

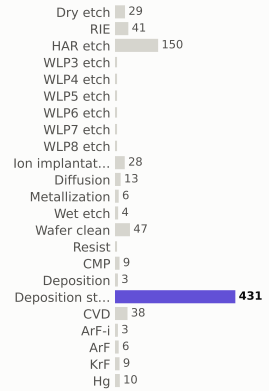

materials deposited (g)

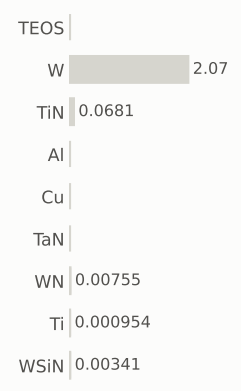

gases emitted (g)

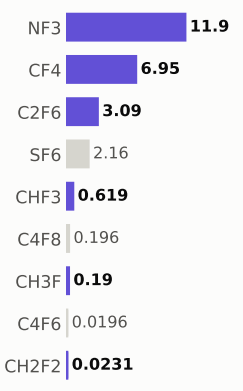

Step #11210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,076.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 660.9 of 1,872.8 (this step +0.328)

MPW materials — 60.5 of 132.5 (this step +0.0159)

GPW gases — 354.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

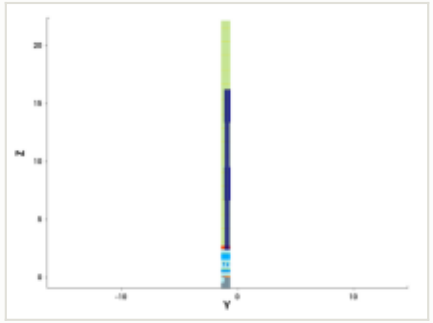

y cut at -1.035 µm

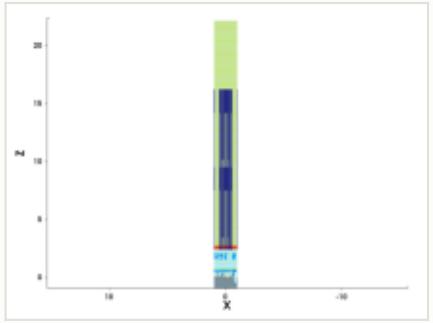

mask for this step

no mask for this step

steps by process area

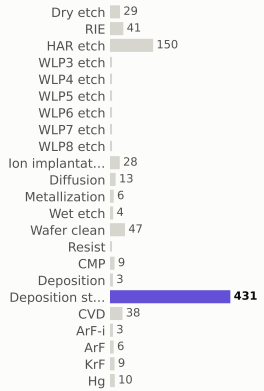

materials deposited (g)

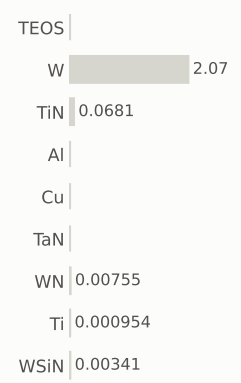

gases emitted (g)

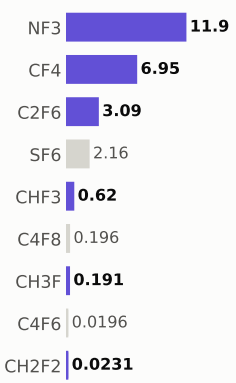

Step #11220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,076.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

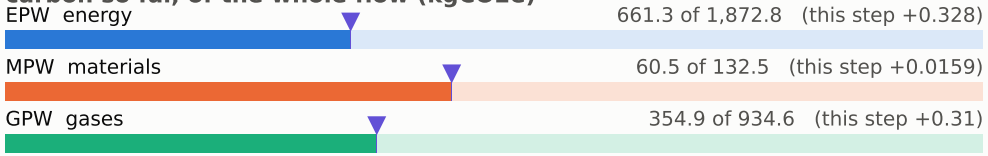

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

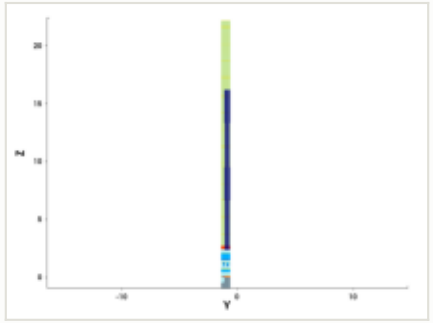

y cut at -1.035 µm

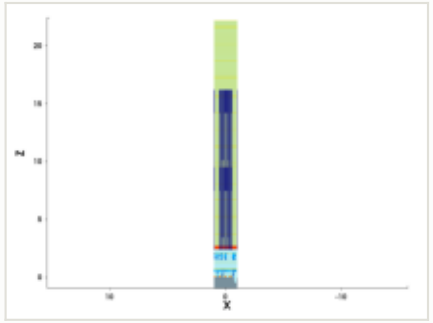

mask for this step

no mask for this step

steps by process area

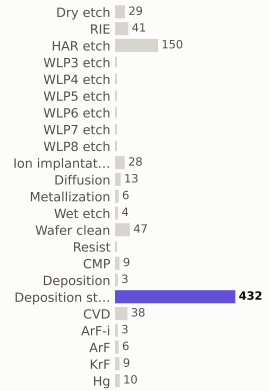

materials deposited (g)

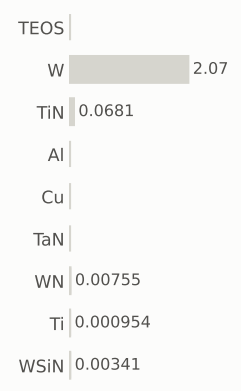

gases emitted (g)

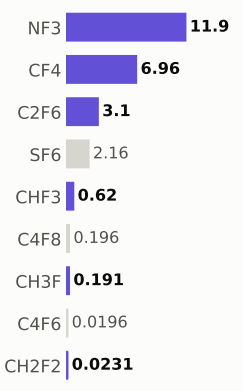

Step #11230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,077.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

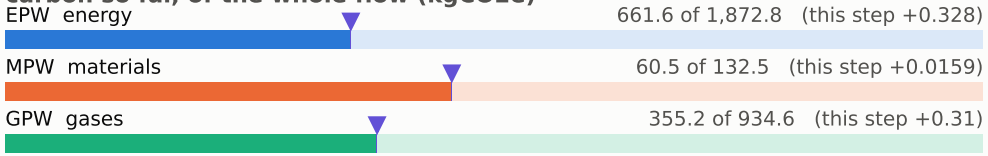

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

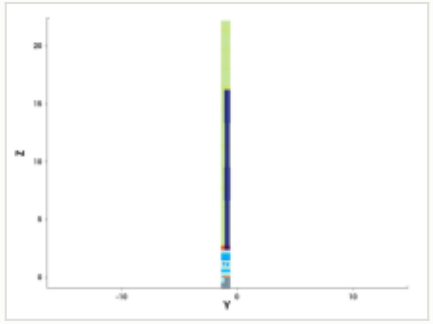

y cut at -1.035 µm

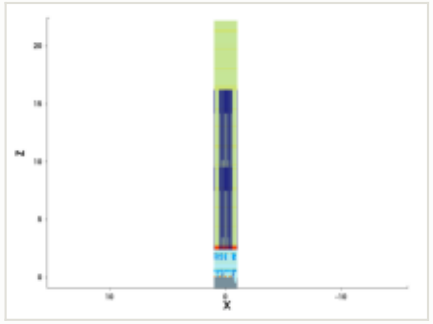

mask for this step

no mask for this step

steps by process area

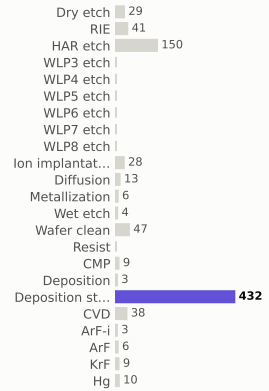

materials deposited (g)

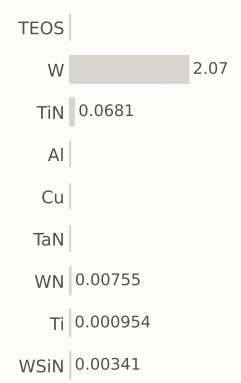

gases emitted (g)

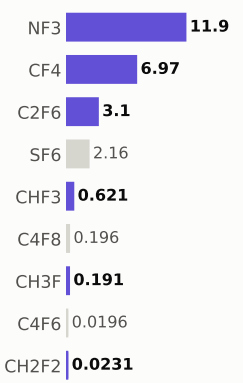

Step #11240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,077.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

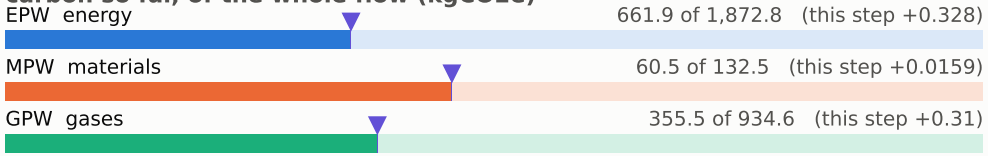

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

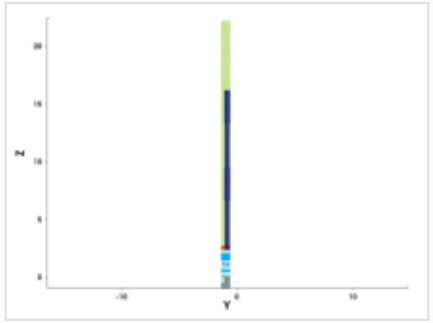

y cut at -1.035 µm

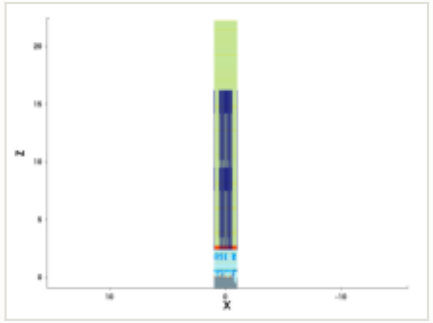

mask for this step

no mask for this step

steps by process area

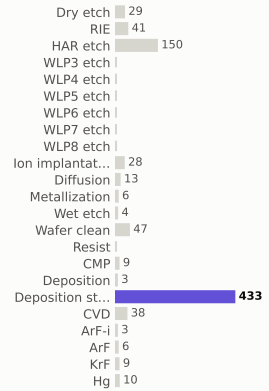

materials deposited (g)

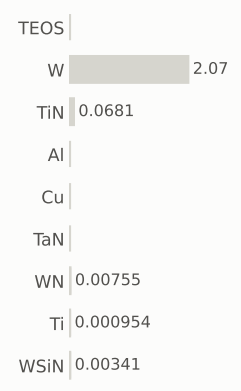

gases emitted (g)

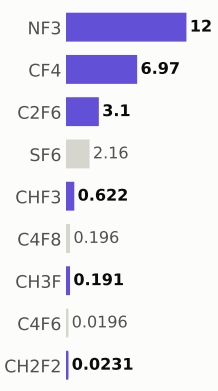

Step #11250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,078.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

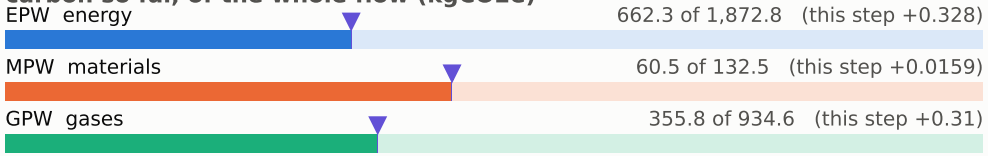

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

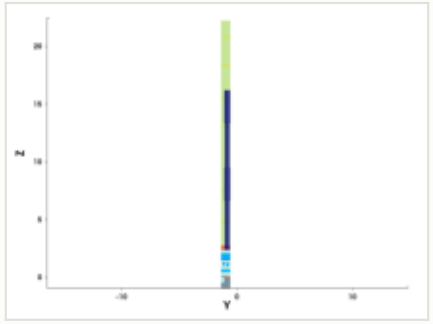

y cut at -1.035 µm

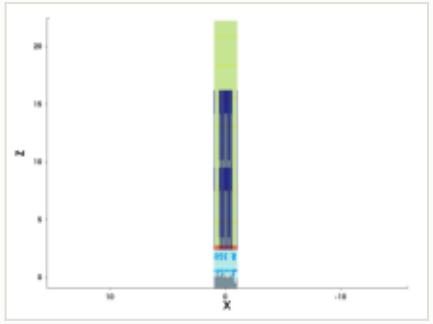

mask for this step

no mask for this step

steps by process area

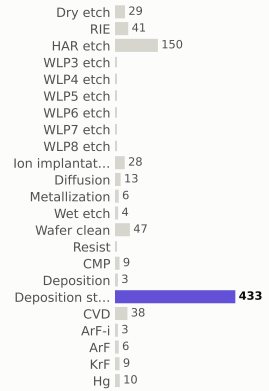

materials deposited (g)

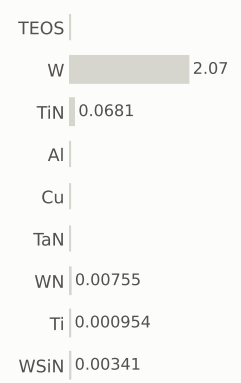

gases emitted (g)

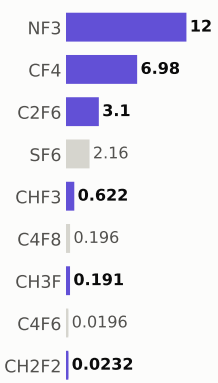

Step #11260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,079.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

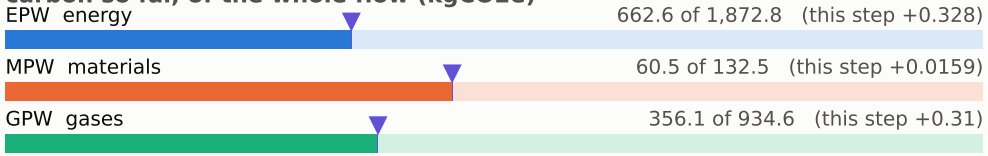

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

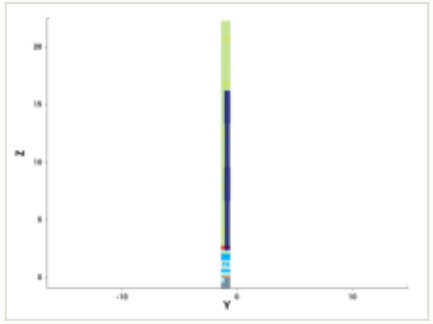

y cut at -1.035 µm

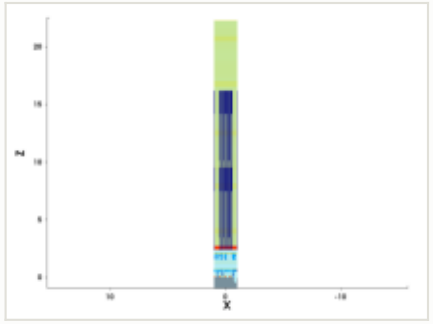

mask for this step

no mask for this step

steps by process area

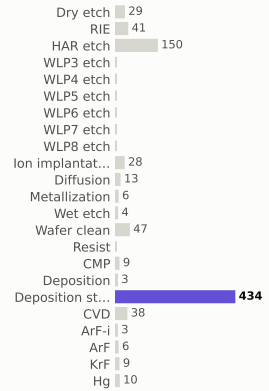

materials deposited (g)

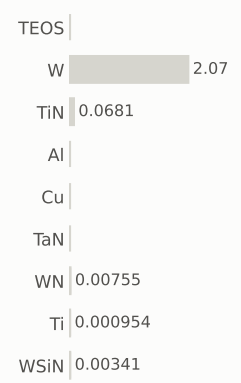

gases emitted (g)

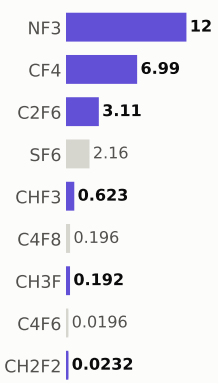

Step #11270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,079.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

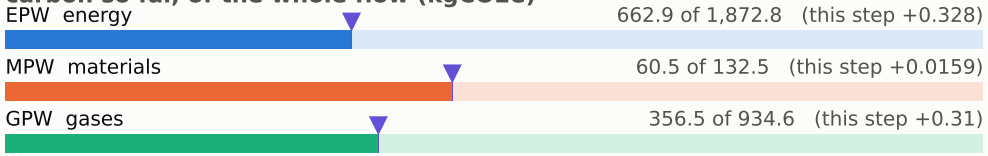

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

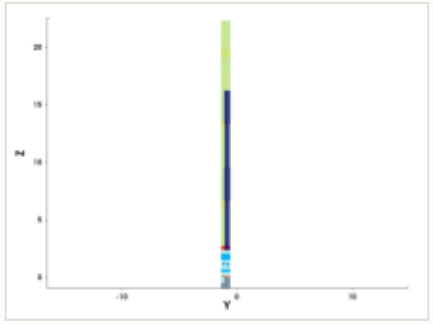

y cut at -1.035 µm

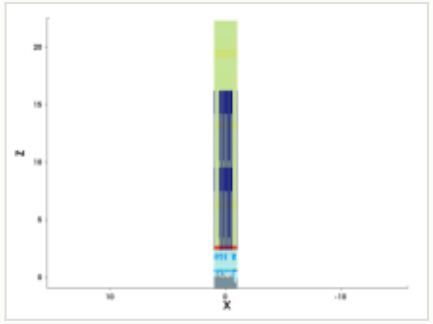

mask for this step

no mask for this step

steps by process area

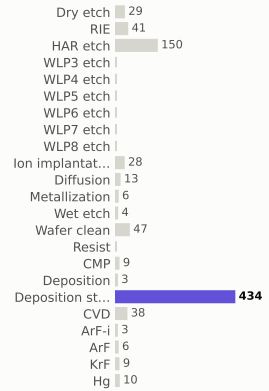

materials deposited (g)

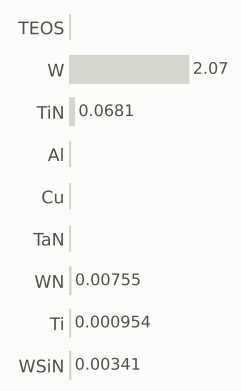

gases emitted (g)

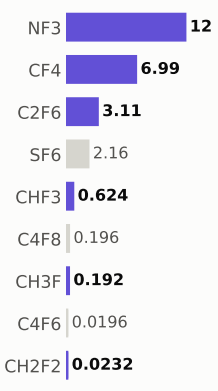

Step #11280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,080.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

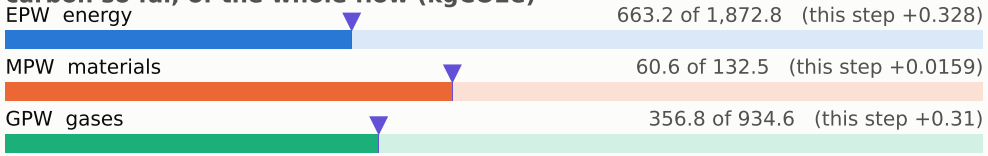

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

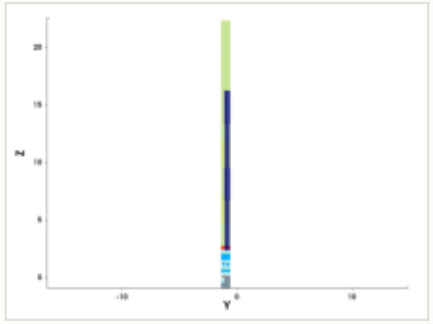

y cut at -1.035 µm

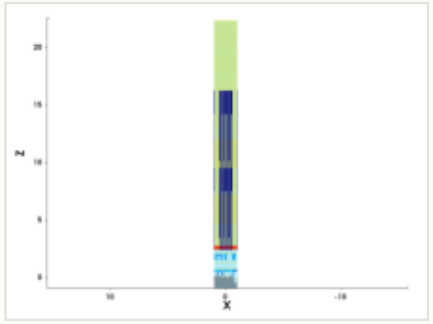

mask for this step

no mask for this step

steps by process area

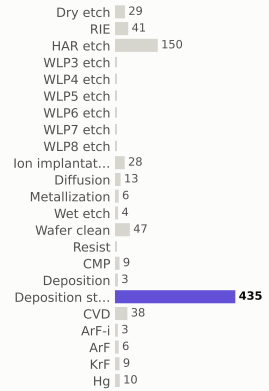

materials deposited (g)

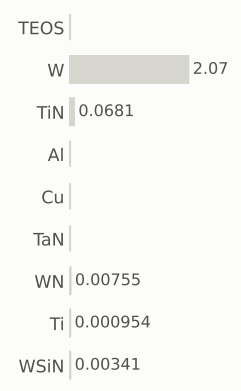

gases emitted (g)

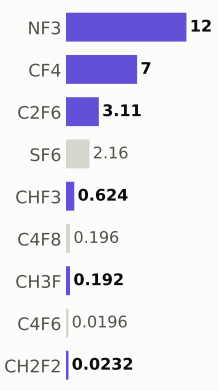

Step #11290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,081.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

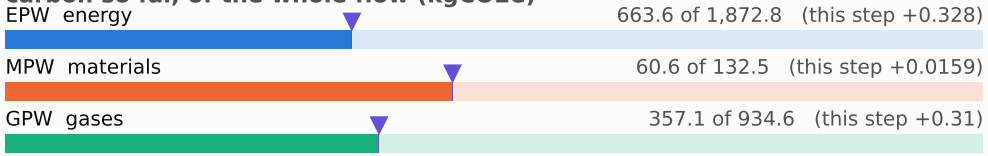

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

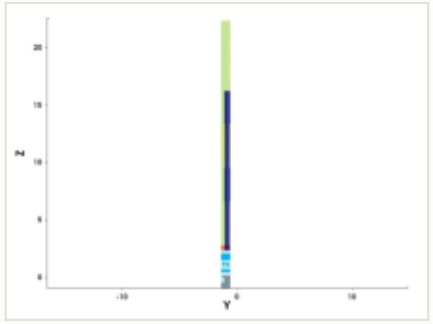

y cut at -1.035 µm

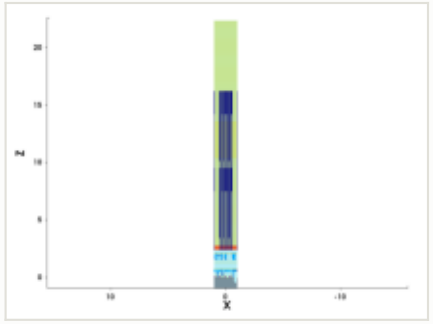

mask for this step

no mask for this step

steps by process area

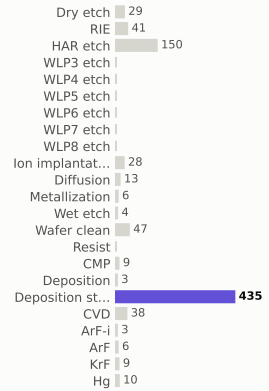

materials deposited (g)

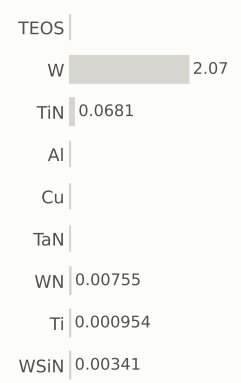

gases emitted (g)

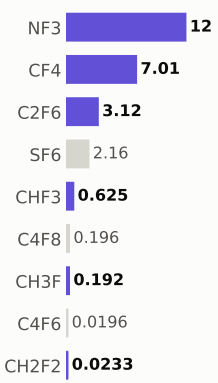

Step #11300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,081.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

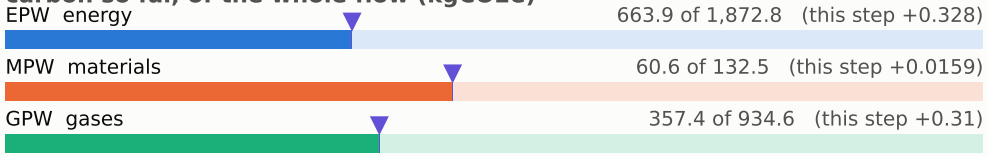

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

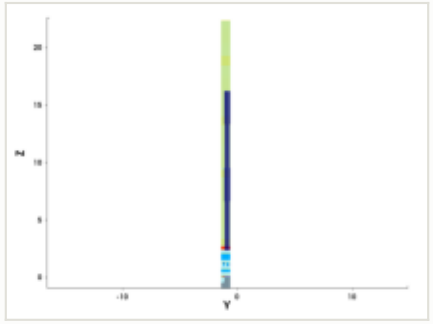

y cut at -1.035 µm

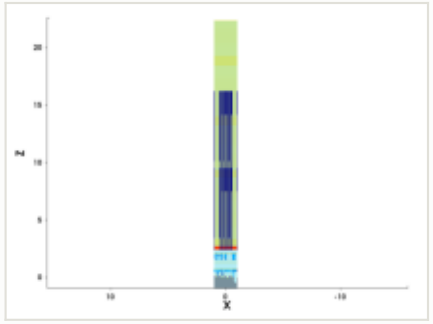

mask for this step

no mask for this step

steps by process area

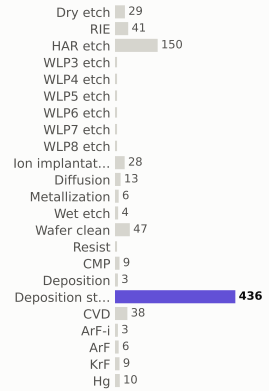

materials deposited (g)

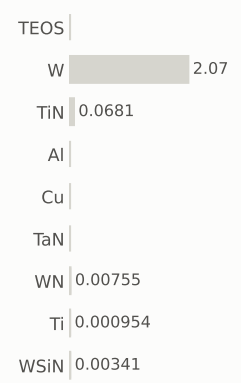

gases emitted (g)

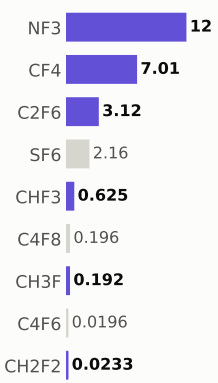

Step #11310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,082.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

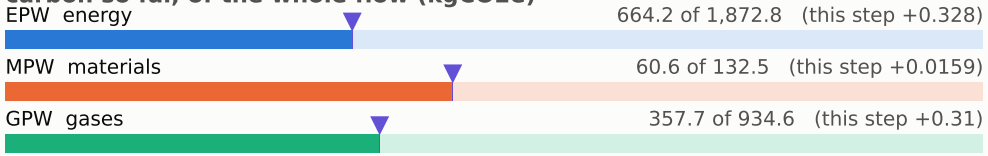

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

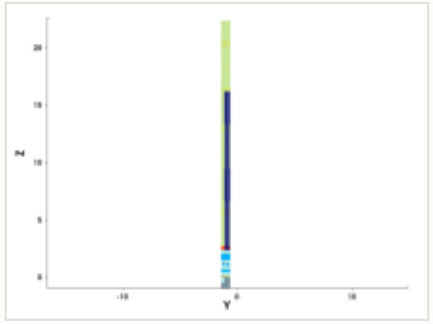

y cut at -1.035 µm

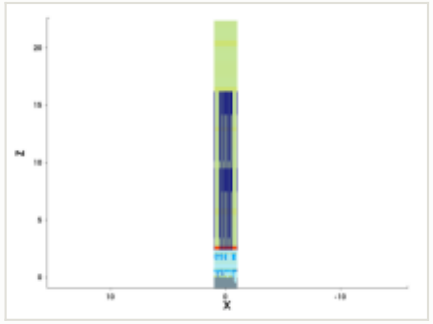

mask for this step

no mask for this step

steps by process area

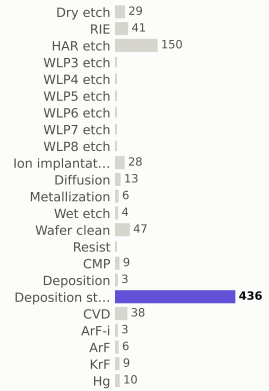

materials deposited (g)

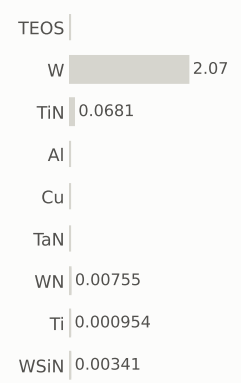

gases emitted (g)

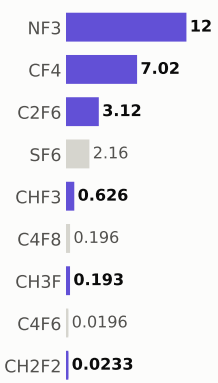

Step #11320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,083.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

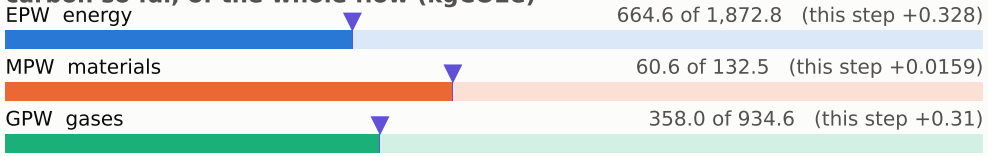

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

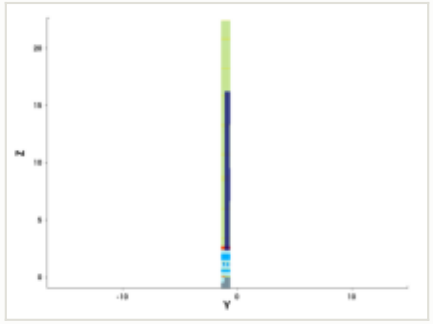

y cut at -1.035 µm

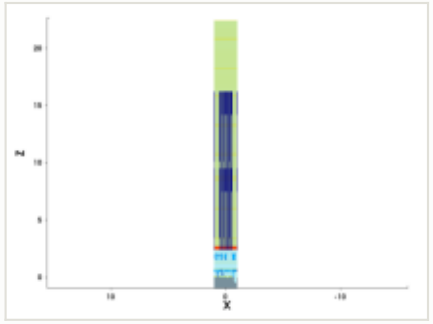

mask for this step

no mask for this step

steps by process area

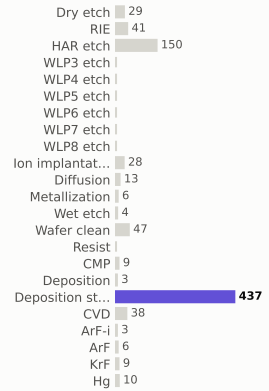

materials deposited (g)

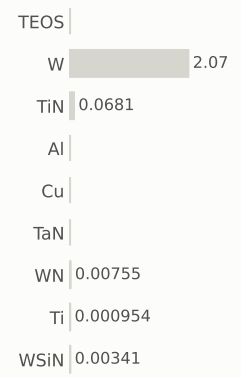

gases emitted (g)

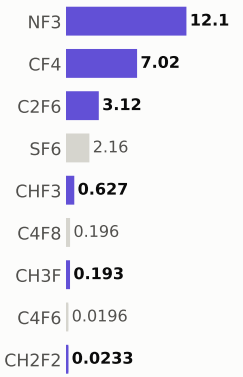

Step #11330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,083.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

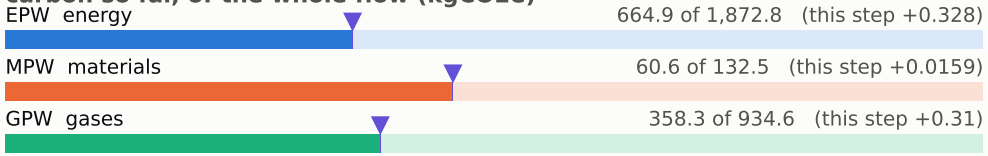

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

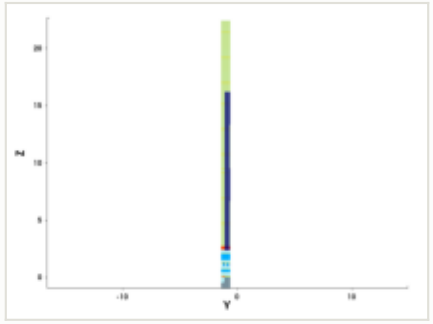

y cut at -1.035 µm

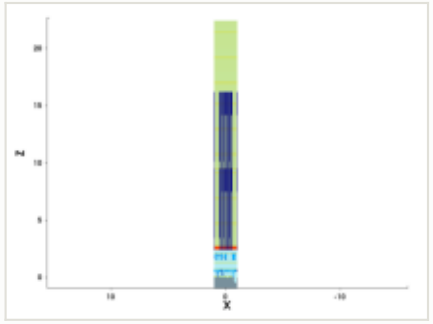

mask for this step

no mask for this step

steps by process area

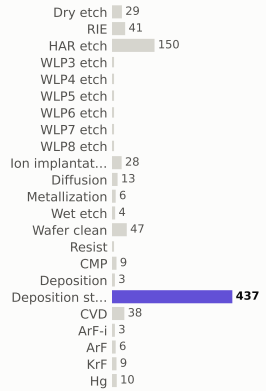

materials deposited (g)

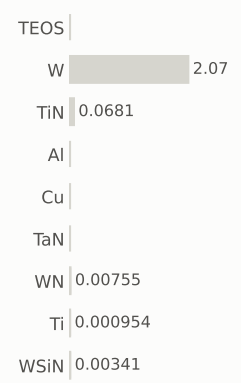

gases emitted (g)

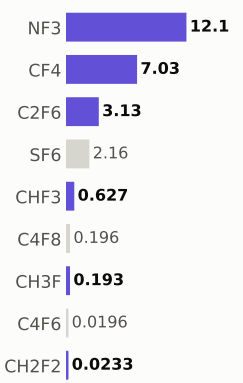

Step #11340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,084.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

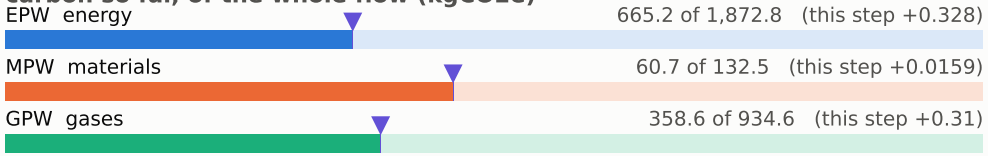

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

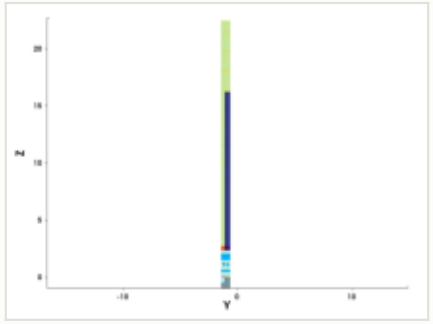

y cut at -1.035 µm

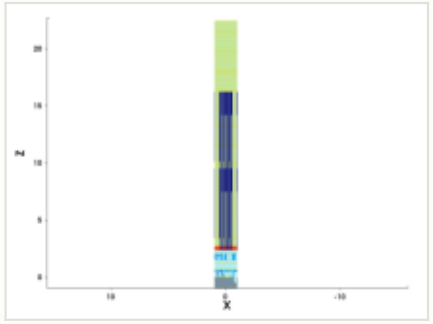

mask for this step

no mask for this step

steps by process area

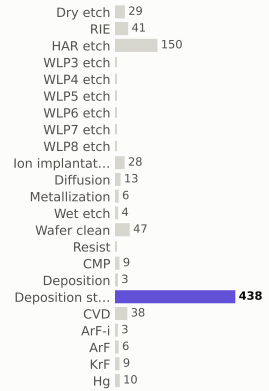

materials deposited (g)

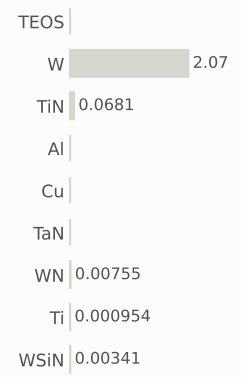

gases emitted (g)

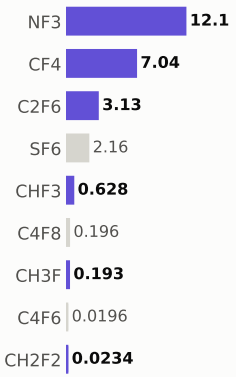

Step #11350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,085.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 665.5 of 1,872.8 (this step +0.328)

MPW materials — 60.7 of 132.5 (this step +0.0159)

GPW gases — 358.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

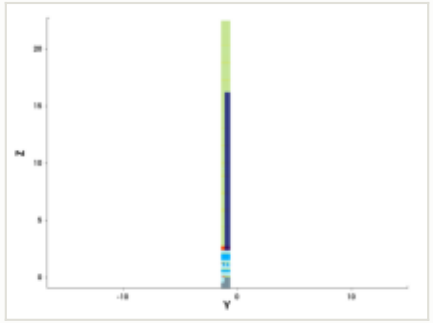

y cut at -1.035 µm

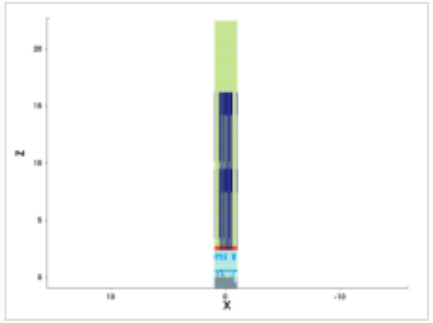

mask for this step

no mask for this step

steps by process area

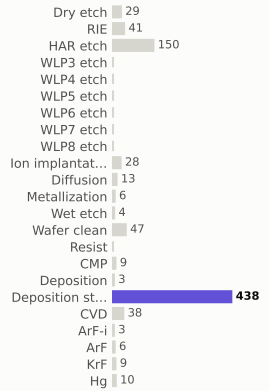

materials deposited (g)

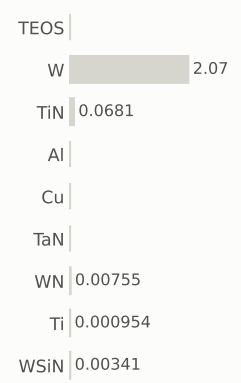

gases emitted (g)

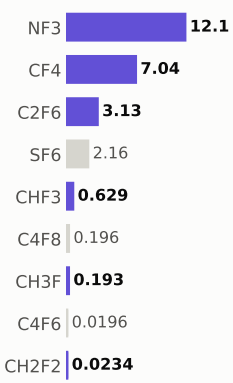

Step #11360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,085.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 665.9 of 1,872.8 (this step +0.328)

MPW materials — 60.7 of 132.5 (this step +0.0159)

GPW gases — 359.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

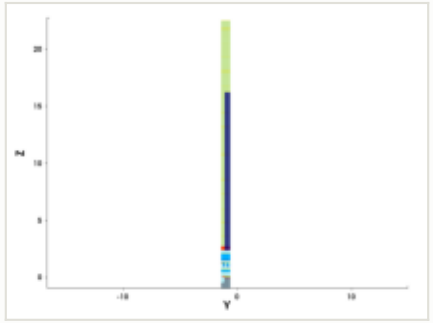

y cut at -1.035 µm

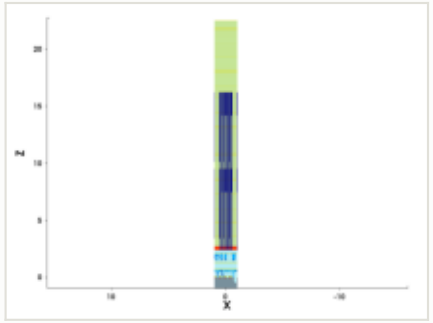

mask for this step

no mask for this step

steps by process area

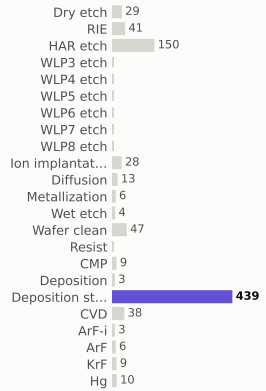

materials deposited (g)

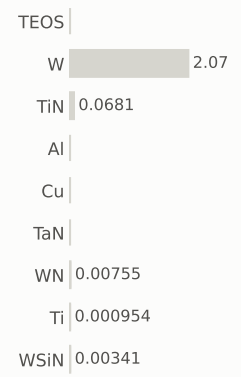

gases emitted (g)

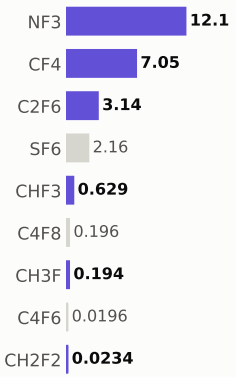

Step #11370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,086.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 666.2 of 1,872.8 (this step +0.328)

MPW materials — 60.7 of 132.5 (this step +0.0159)

GPW gases — 359.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

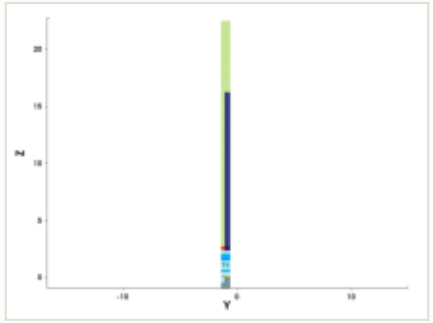

y cut at -1.035 µm

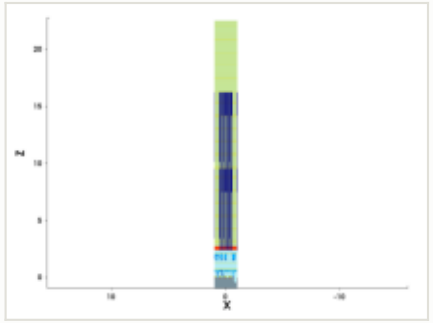

mask for this step

no mask for this step

steps by process area

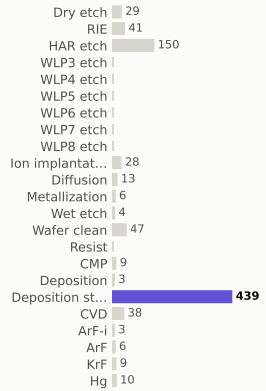

materials deposited (g)

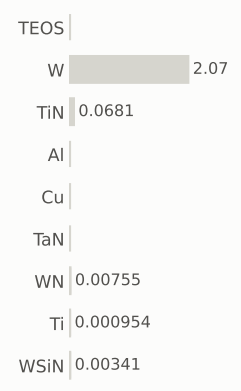

gases emitted (g)

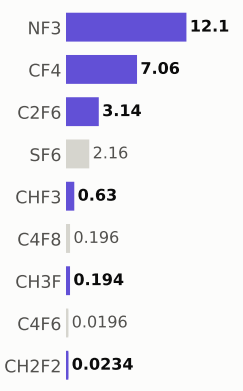

Step #11380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,087.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

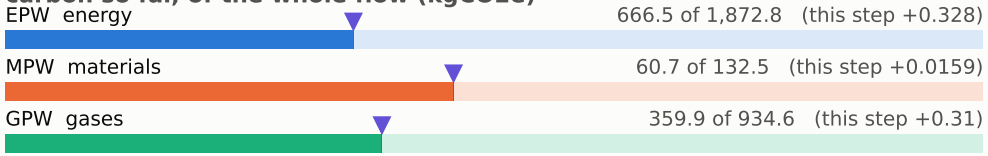

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

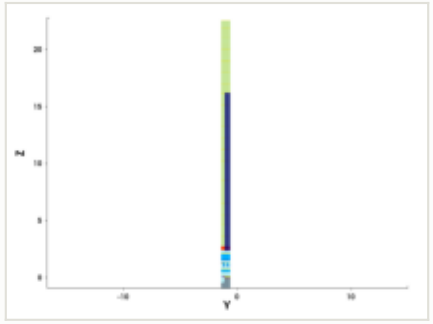

y cut at -1.035 µm

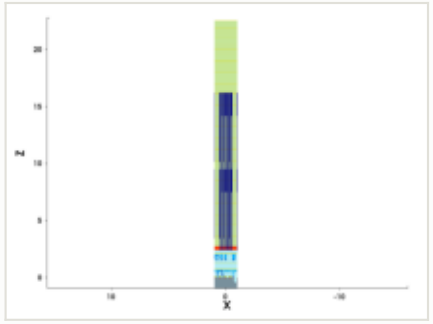

mask for this step

no mask for this step

steps by process area

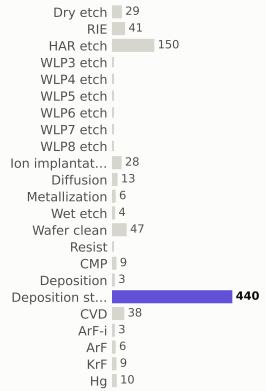

materials deposited (g)

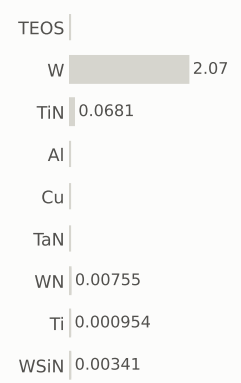

gases emitted (g)

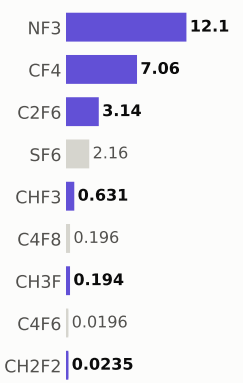

Step #11390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,087.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

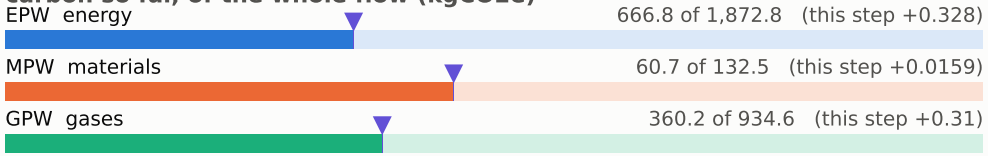

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

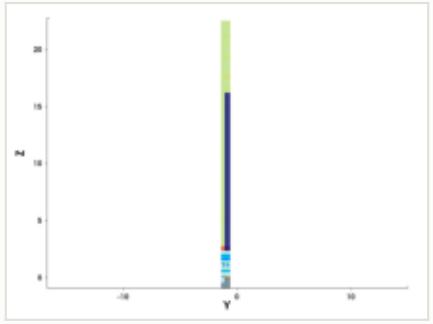

y cut at -1.035 µm

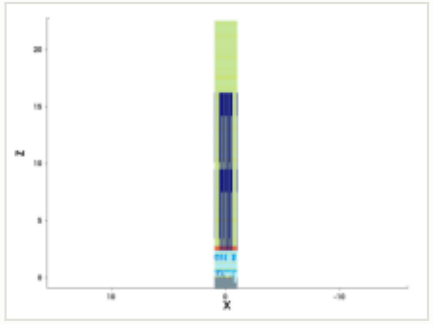

mask for this step

no mask for this step

steps by process area

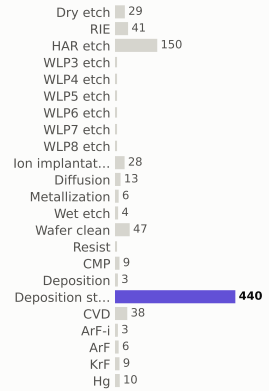

materials deposited (g)

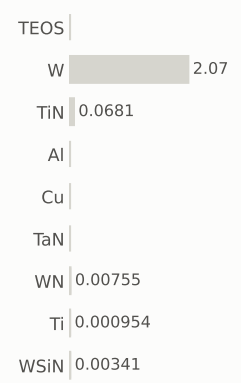

gases emitted (g)

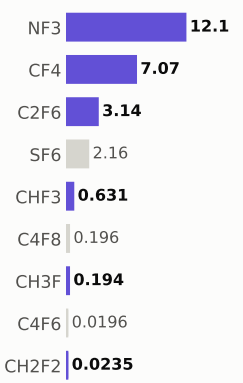

Step #11400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,088.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

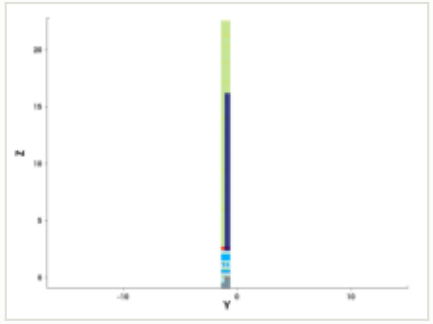

y cut at -1.035 µm

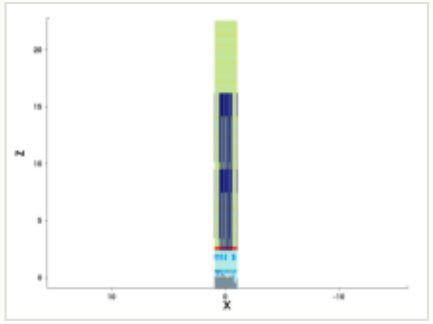

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 667.2 of 1,872.8 (this step +0.328)

MPW materials — 60.8 of 132.5 (this step +0.0159)

GPW gases — 360.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

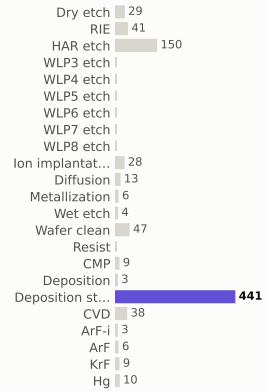

materials deposited (g)

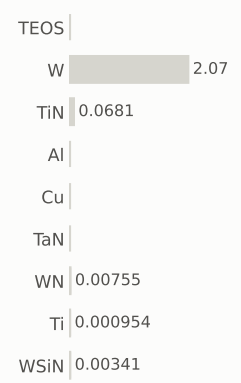

gases emitted (g)

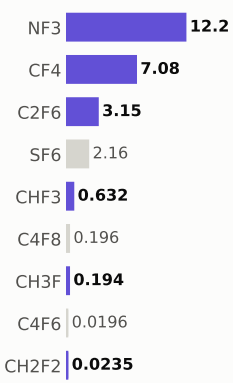

Step #11410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,089.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

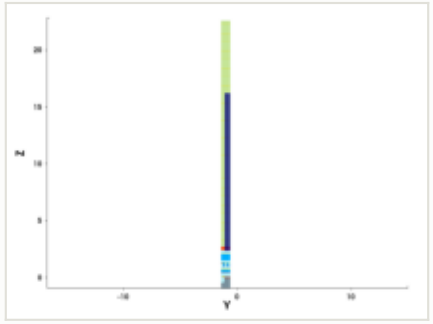

y cut at -1.035 µm

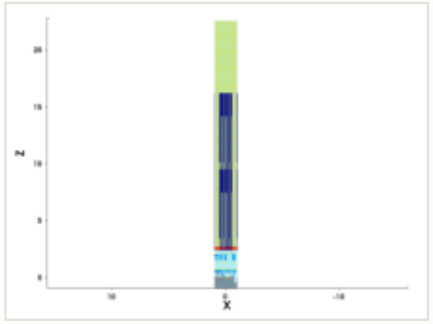

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 667.5 of 1,872.8 (this step +0.328)

MPW materials — 60.8 of 132.5 (this step +0.0159)

GPW gases — 360.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

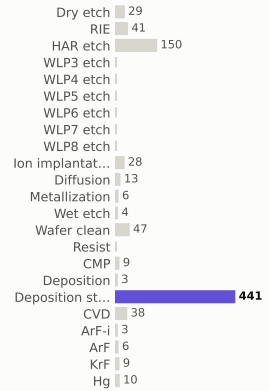

materials deposited (g)

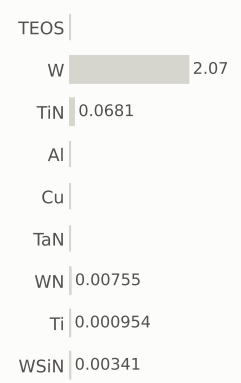

gases emitted (g)

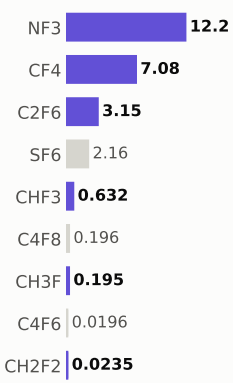

Step #11420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,089.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

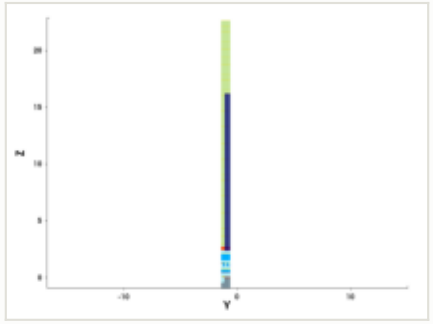

y cut at -1.035 µm

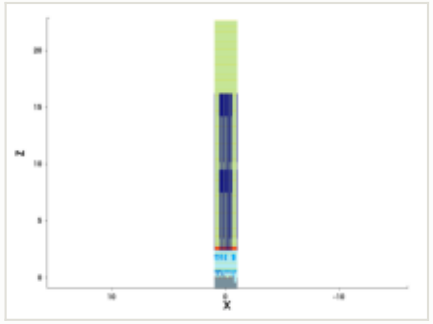

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 667.8 of 1,872.8 (this step +0.328)

MPW materials — 60.8 of 132.5 (this step +0.0159)

GPW gases — 361.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

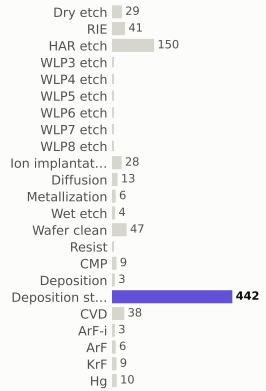

materials deposited (g)

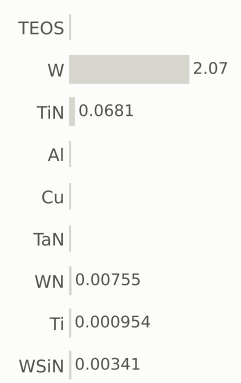

gases emitted (g)

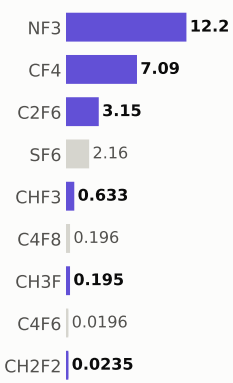

Step #11430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,090.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

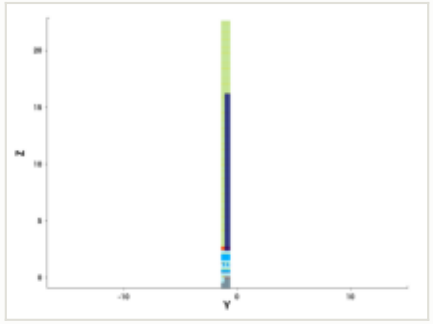

y cut at -1.035 µm

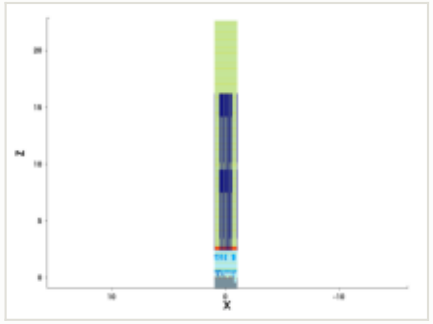

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 668.2 of 1,872.8 (this step +0.328)

MPW materials — 60.8 of 132.5 (this step +0.0159)

GPW gases — 361.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

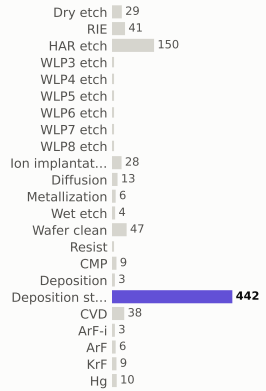

materials deposited (g)

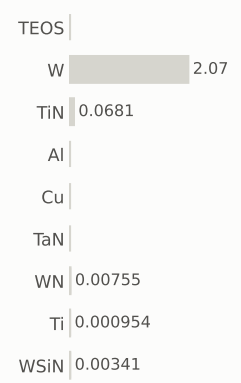

gases emitted (g)

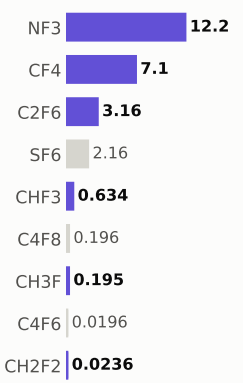

Step #11440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,091.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

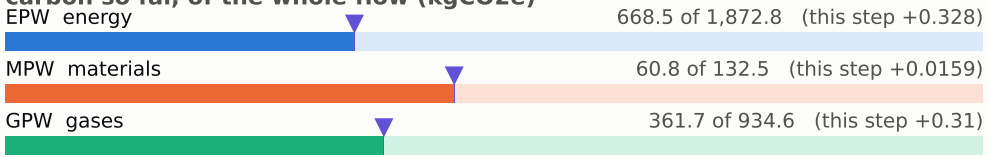

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

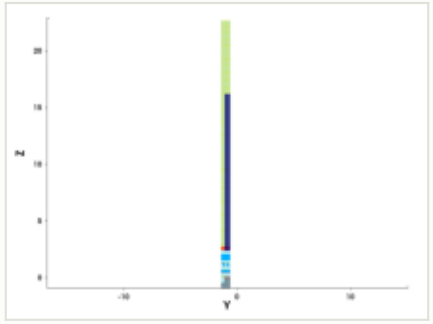

y cut at -1.035 µm

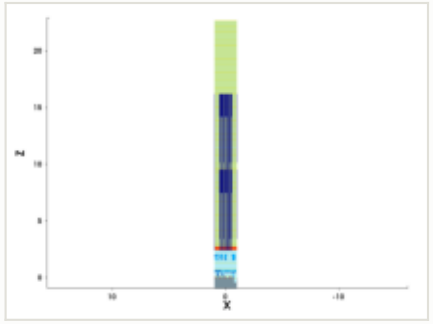

mask for this step

no mask for this step

steps by process area

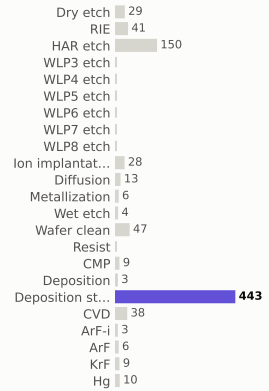

materials deposited (g)

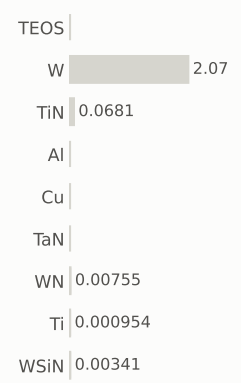

gases emitted (g)

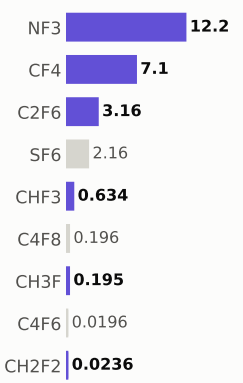

Step #11450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,091.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

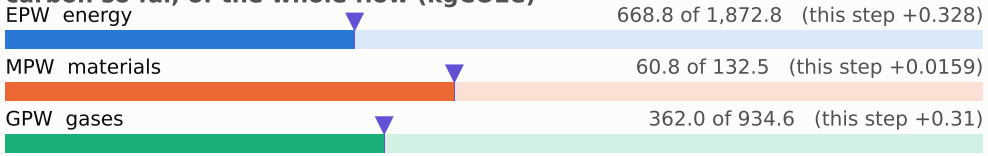

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

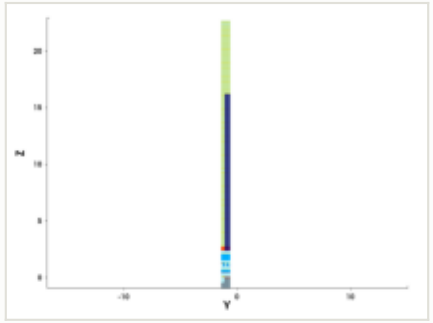

y cut at -1.035 µm

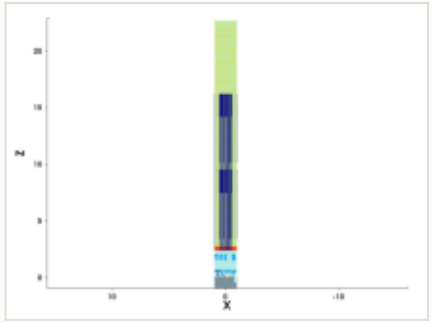

mask for this step

no mask for this step

steps by process area

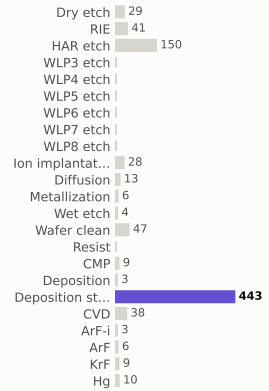

materials deposited (g)

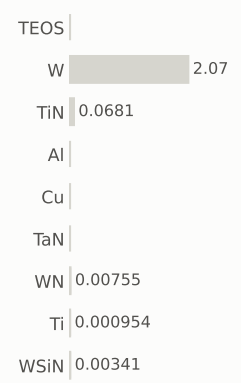

gases emitted (g)

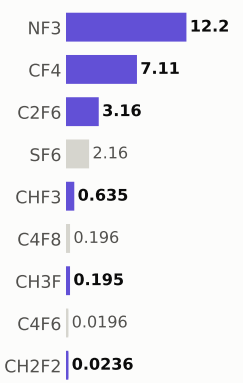

Step #11460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,092.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

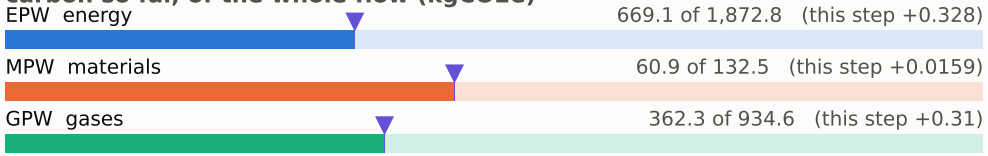

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

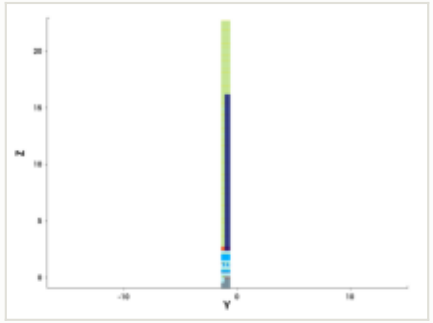

y cut at -1.035 µm

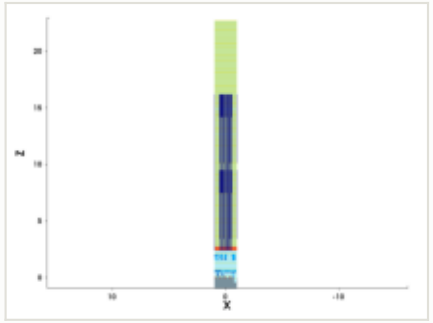

mask for this step

no mask for this step

steps by process area

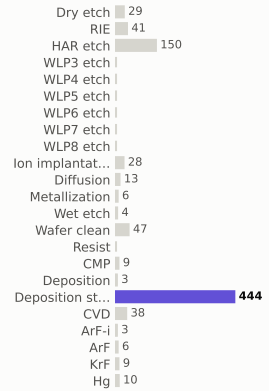

materials deposited (g)

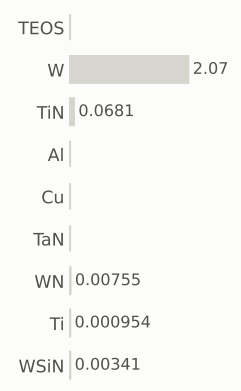

gases emitted (g)

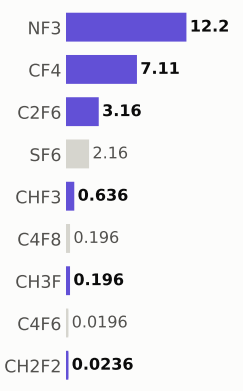

Step #11470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,093.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

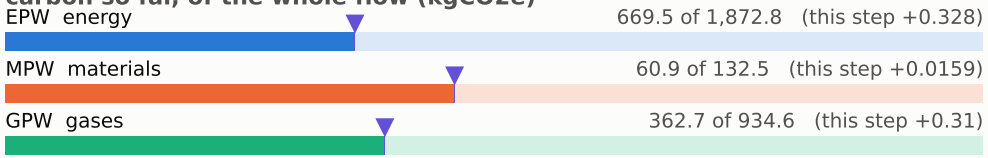

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

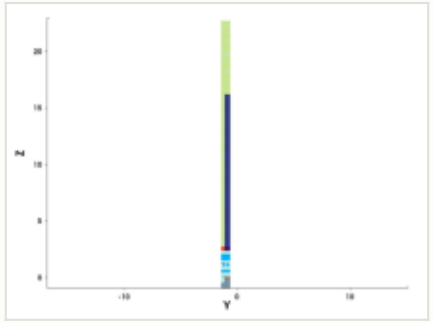

y cut at -1.035 µm

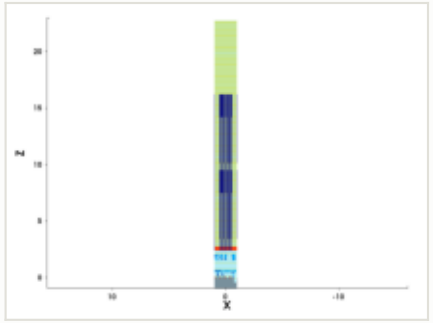

mask for this step

no mask for this step

steps by process area

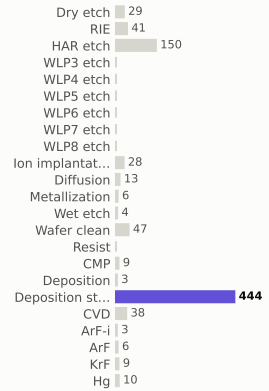

materials deposited (g)

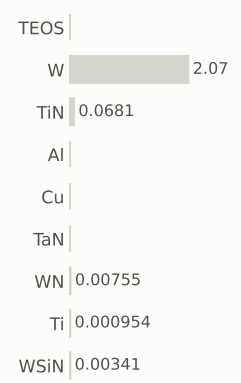

gases emitted (g)

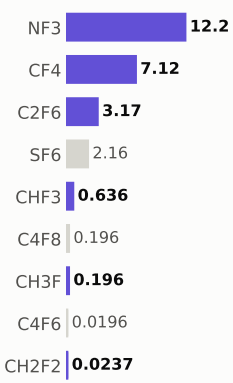

Step #11480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,093.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

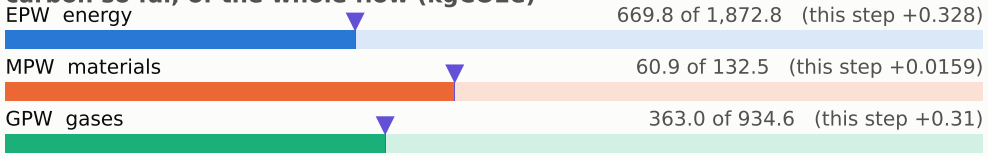

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

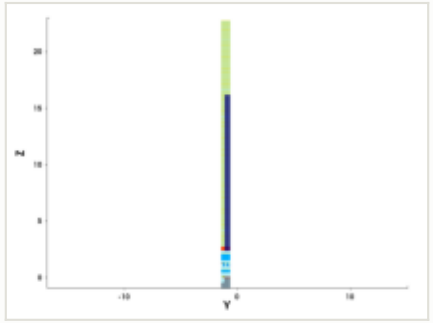

y cut at -1.035 µm

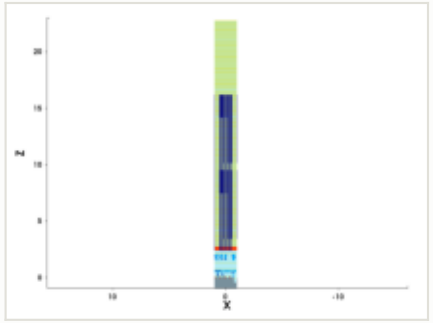

mask for this step

no mask for this step

steps by process area

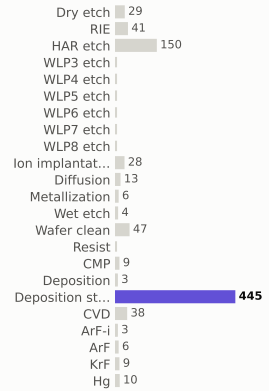

materials deposited (g)

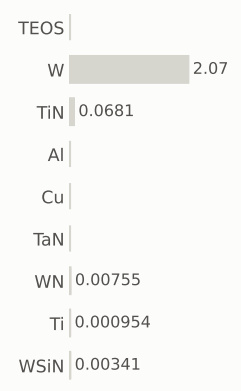

gases emitted (g)

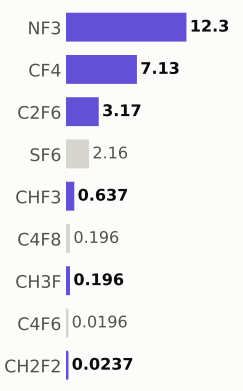

Step #11490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,094.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 670.1 of 1,872.8 (this step +0.328)

MPW materials — 60.9 of 132.5 (this step +0.0159)

GPW gases — 363.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

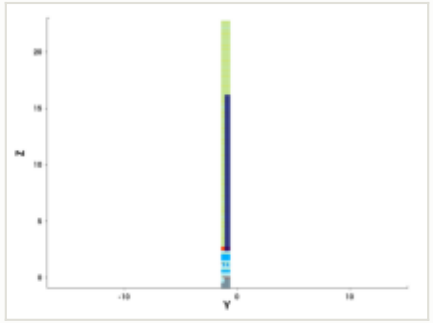

y cut at -1.035 µm

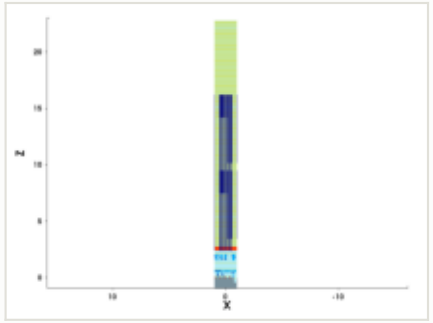

mask for this step

no mask for this step

steps by process area

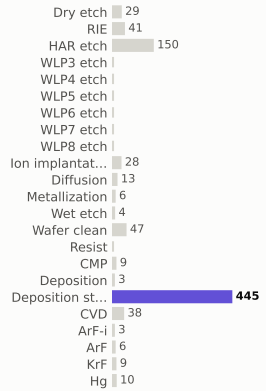

materials deposited (g)

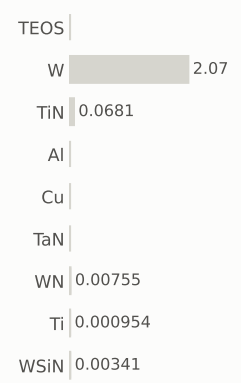

gases emitted (g)

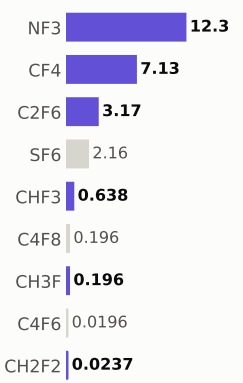

Step #11500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,095.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

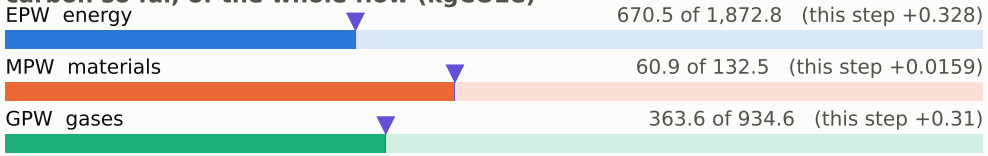

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

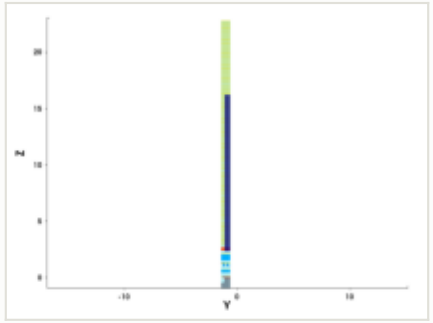

y cut at -1.035 µm

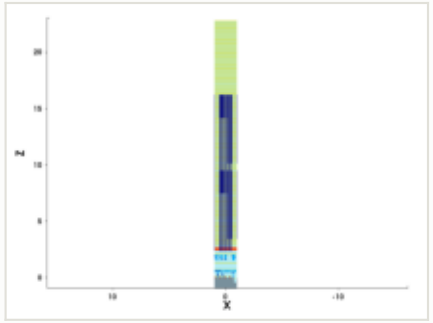

mask for this step

no mask for this step

steps by process area

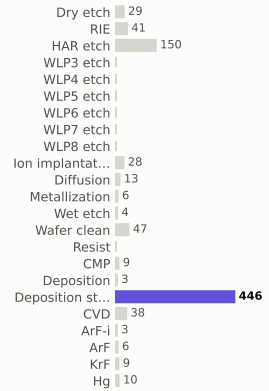

materials deposited (g)

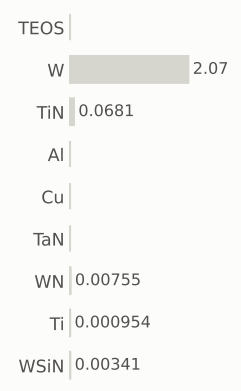

gases emitted (g)

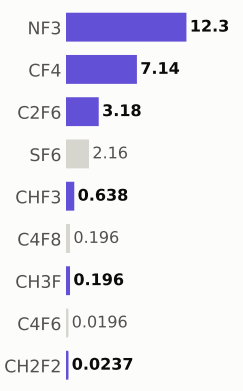

Step #11510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,095.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

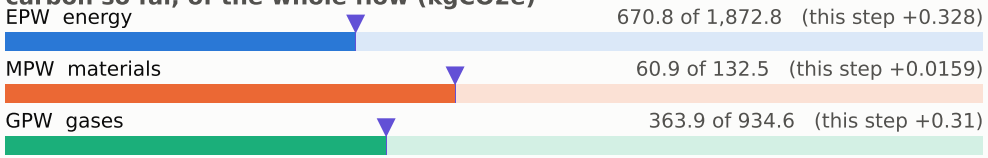

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

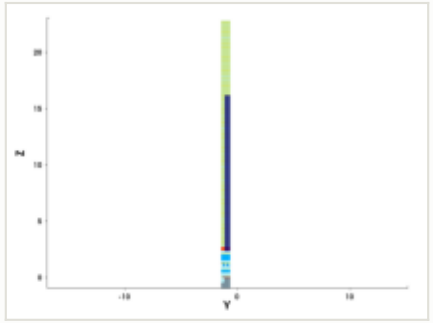

y cut at -1.035 µm

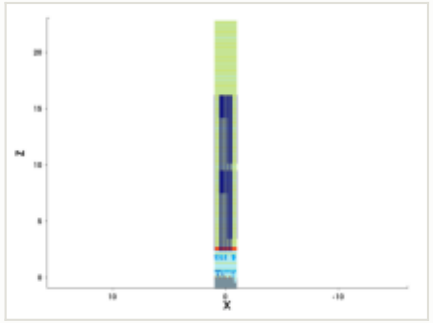

mask for this step

no mask for this step

steps by process area

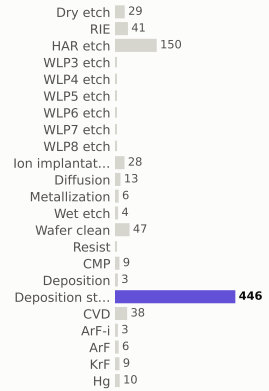

materials deposited (g)

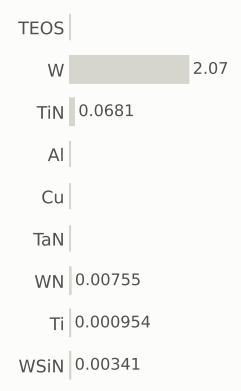

gases emitted (g)

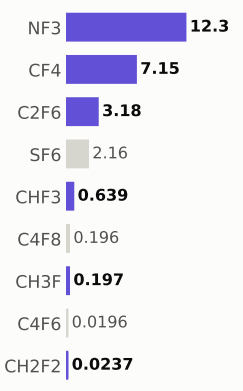

Step #11520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,096.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

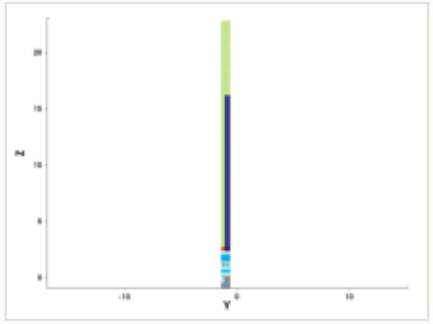

y cut at -1.035 µm

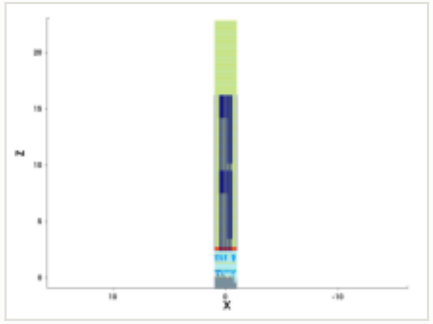

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 671.1 of 1,872.8 (this step +0.328)

MPW materials — 60.9 of 132.5 (this step +0.0159)

GPW gases — 364.2 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

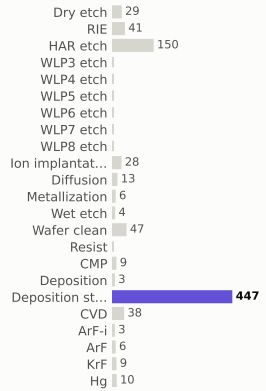

materials deposited (g)

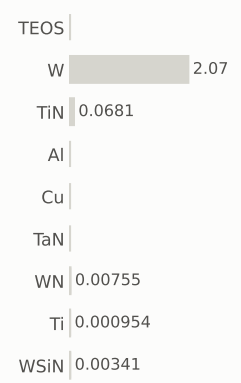

gases emitted (g)

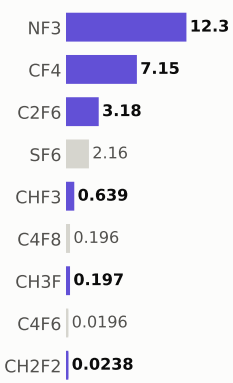

Step #11530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,096.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

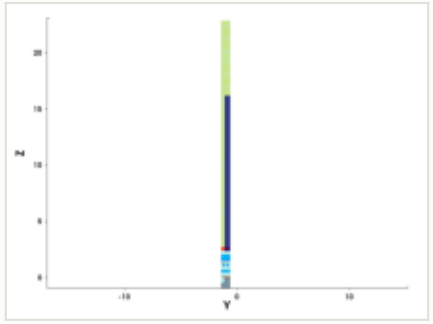

y cut at -1.035 µm

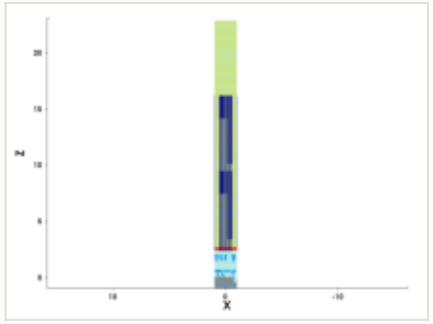

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 671.4 of 1,872.8 (this step +0.328)

MPW materials — 61 of 132.5 (this step +0.0159)

GPW gases — 364.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

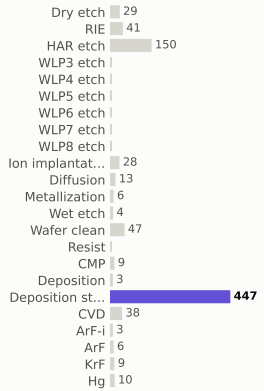

materials deposited (g)

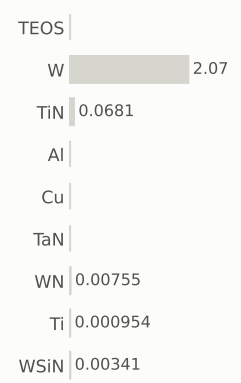

gases emitted (g)

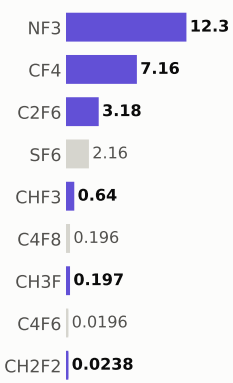

Step #11540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,097.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

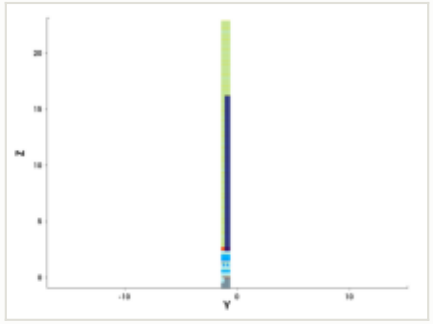

y cut at -1.035 µm

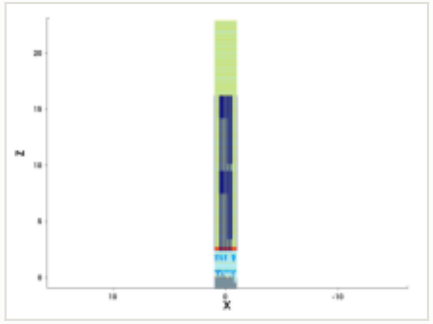

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 671.8 of 1,872.8 (this step +0.328)

MPW materials — 61 of 132.5 (this step +0.0159)

GPW gases — 364.8 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

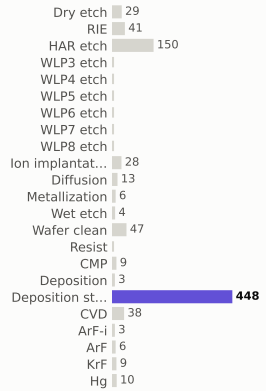

materials deposited (g)

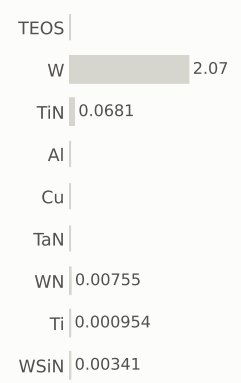

gases emitted (g)

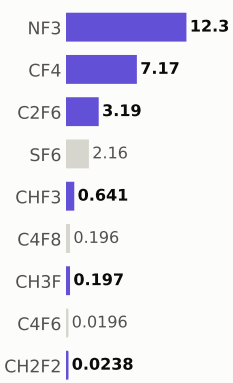

Step #11550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,098.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

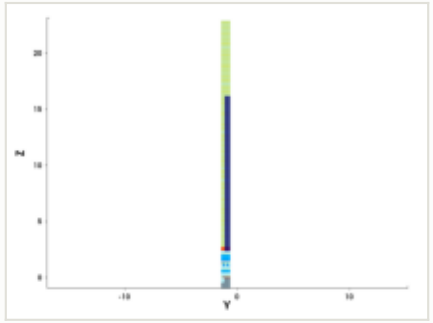

y cut at -1.035 µm

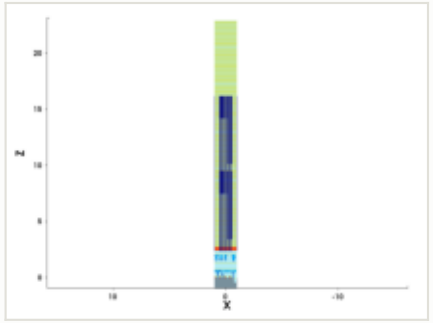

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 672.1 of 1,872.8 (this step +0.328)

MPW materials — 61 of 132.5 (this step +0.0159)

GPW gases — 365.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

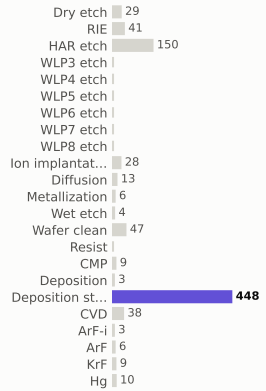

materials deposited (g)

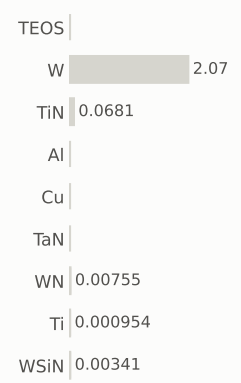

gases emitted (g)

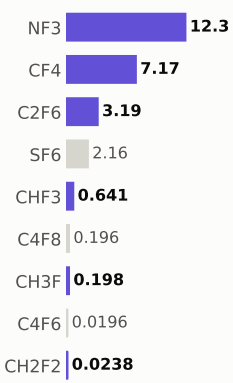

Step #11560: CVD

depo_isotropic · CVD

1.31	1,099.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

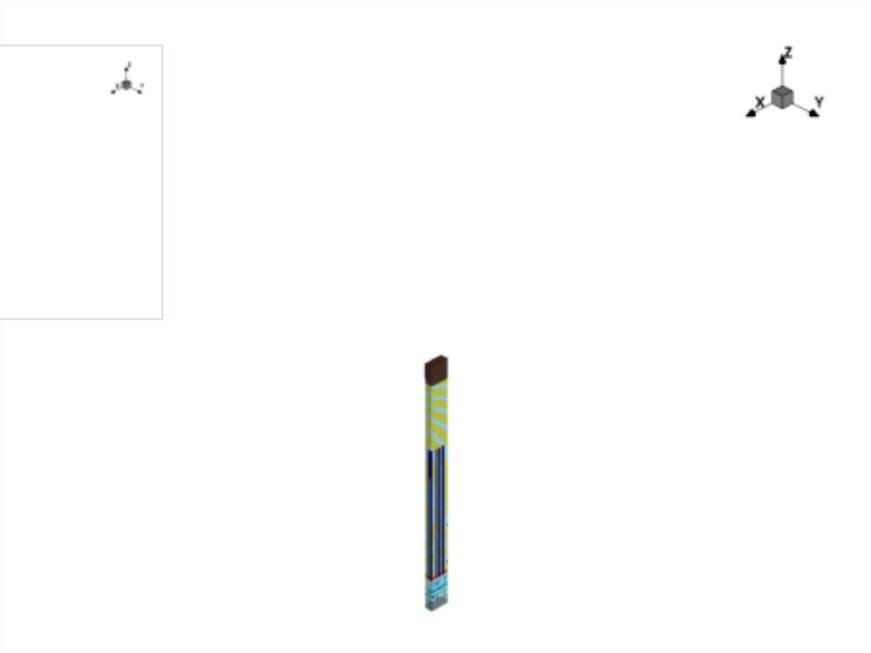

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

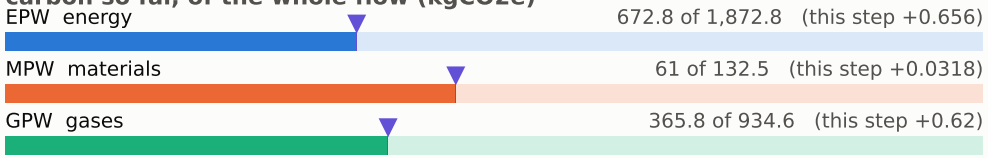

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

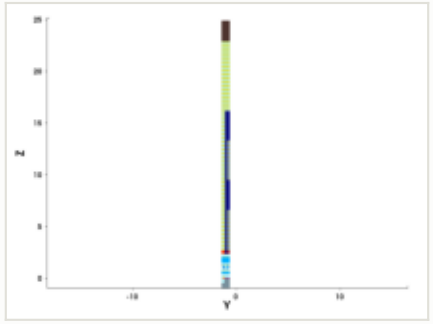

y cut at -1.035 µm

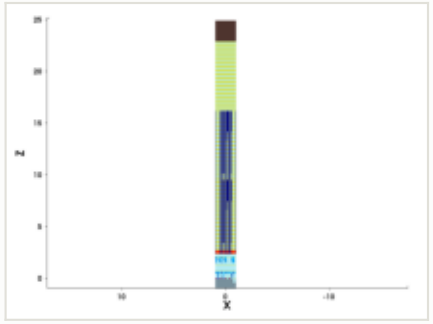

mask for this step

no mask for this step

steps by process area

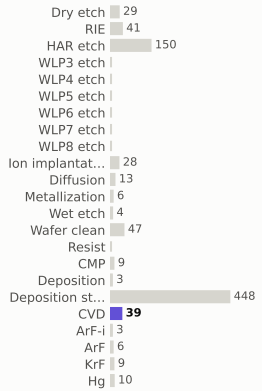

materials deposited (g)

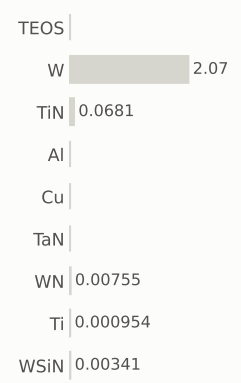

gases emitted (g)

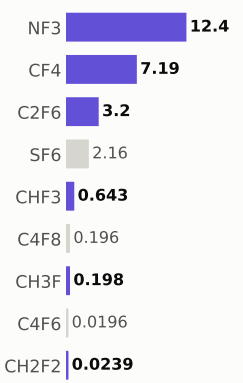

Step #11570: CVD

depo_isotropic · CVD

1.31	1,100.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

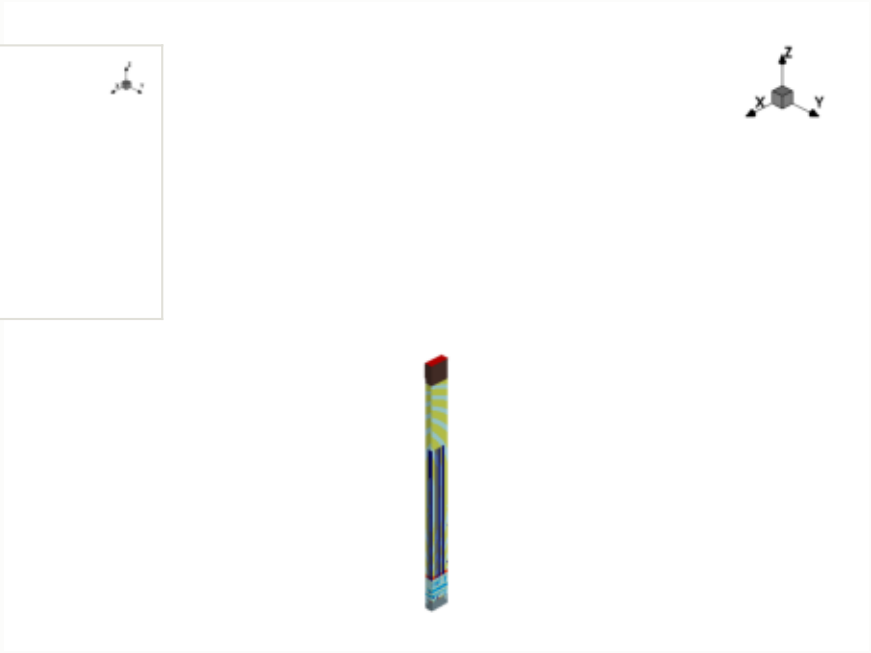

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

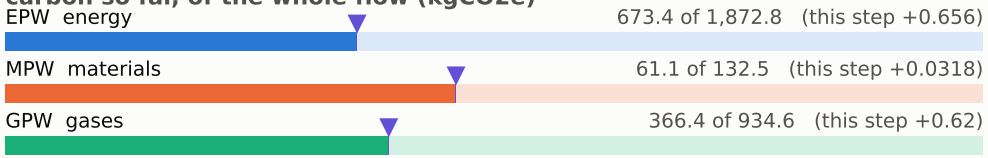

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

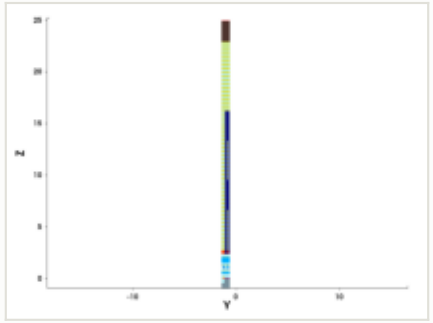

y cut at -1.035 µm

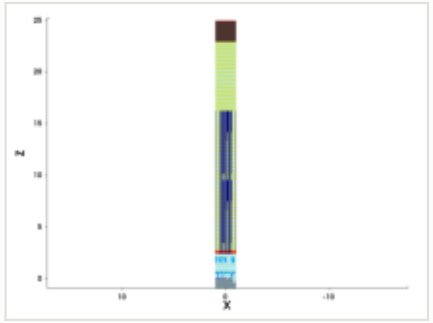

mask for this step

no mask for this step

steps by process area

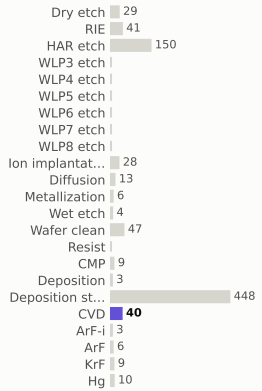

materials deposited (g)

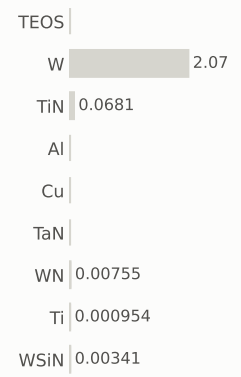

gases emitted (g)

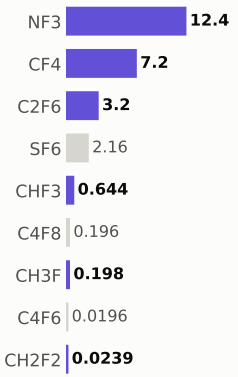

Step #11580: Wafer_clean

clean · Wafer_clean

0.169	1,101.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

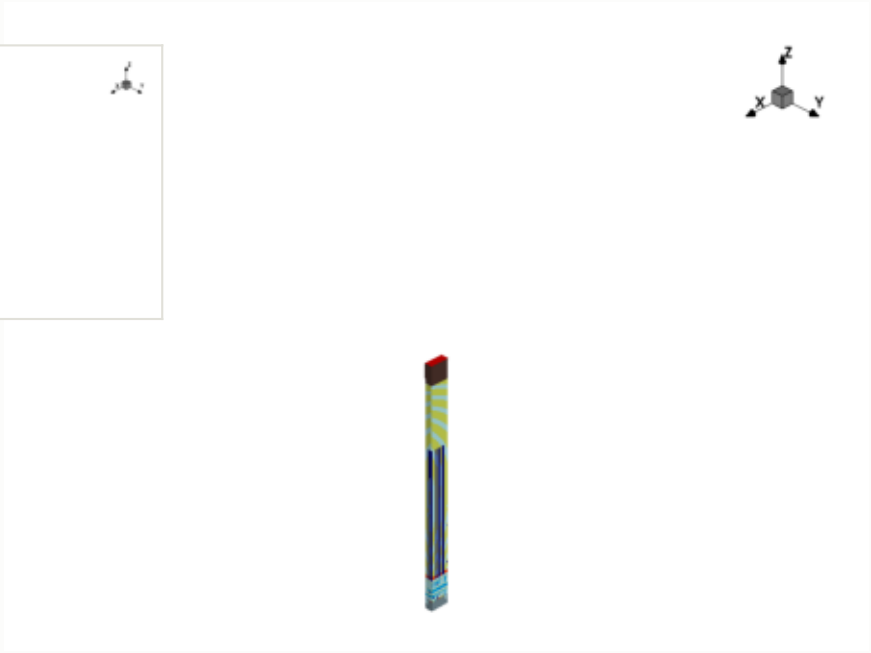

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

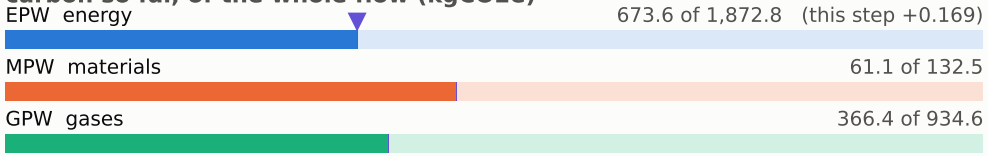

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

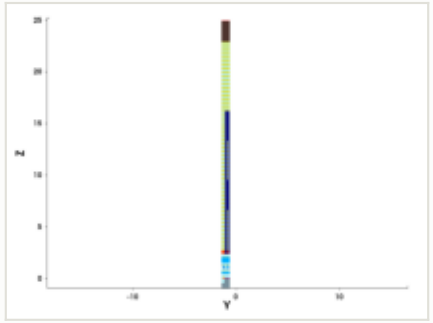

y cut at -1.035 µm

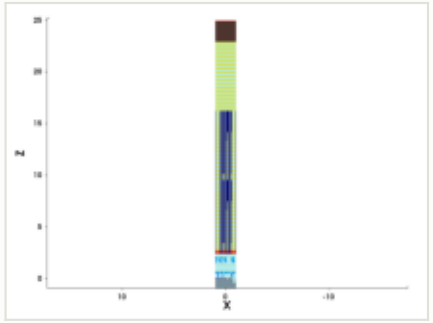

mask for this step

no mask for this step

steps by process area

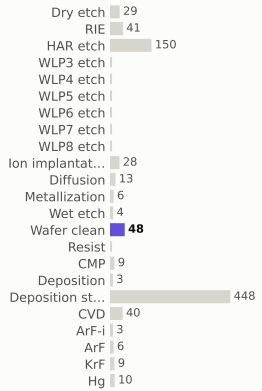

materials deposited (g)

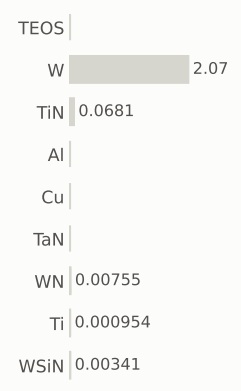

gases emitted (g)

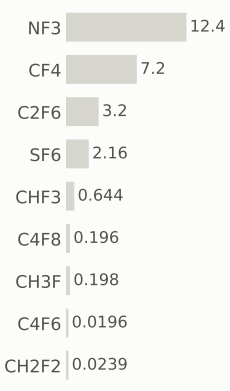

Step #11590: ArF-i

litho_patterning · ArF-i

0.217	1,101.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

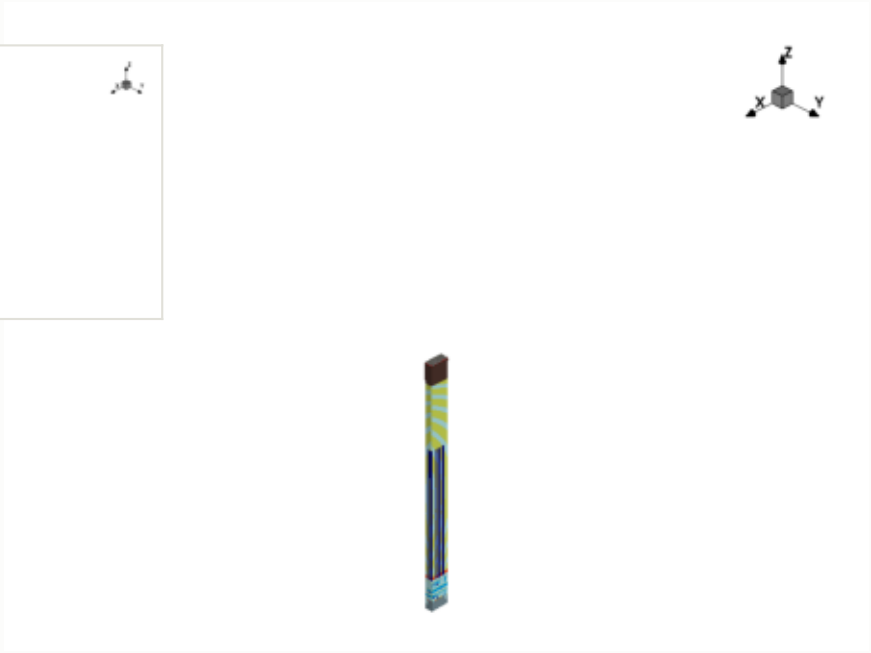

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

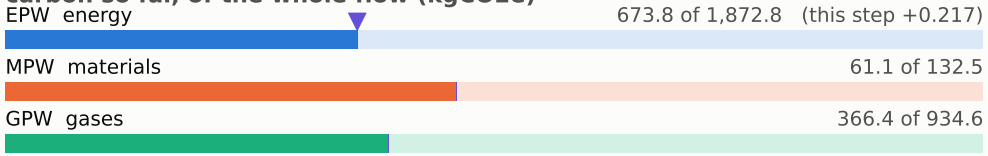

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

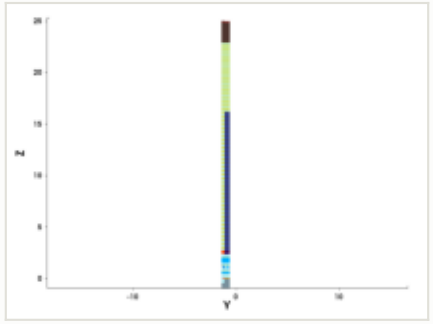

y cut at -1.035 µm

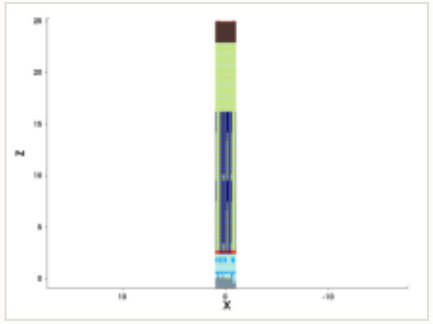

mask: layer 27:0 (OASIS)

steps by process area

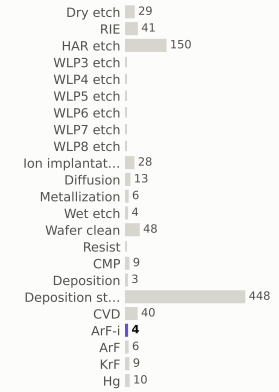

materials deposited (g)

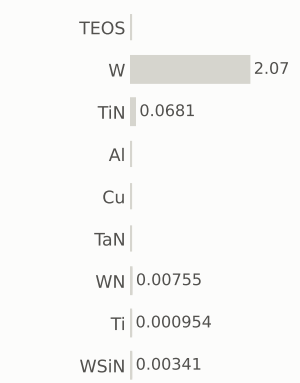

gases emitted (g)

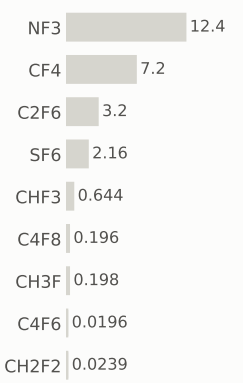

Step #11600: RIE

etch_anisotropic · RIE

1.04	1,102.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

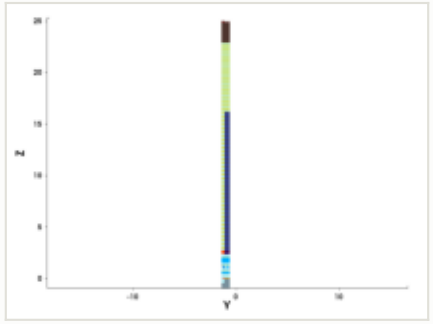

y cut at -1.035 µm

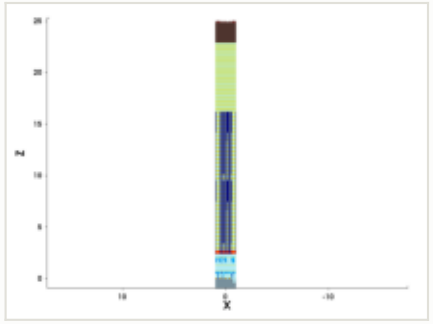

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 674.6 of 1,872.8 (this step +0.801)

MPW materials — 61.1 of 132.5 (this step +0.0571)

GPW gases — 366.6 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

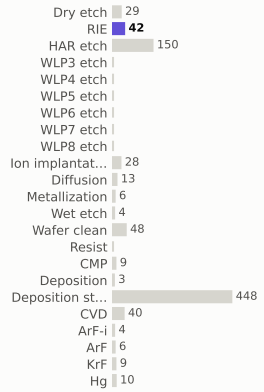

materials deposited (g)

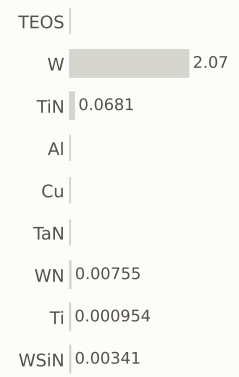

gases emitted (g)

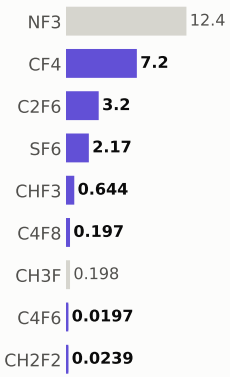

Step #11610: RIE

etch_anisotropic · RIE

1.04	1,103.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

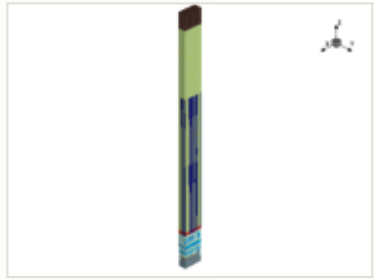

x cut at 0.000 µm

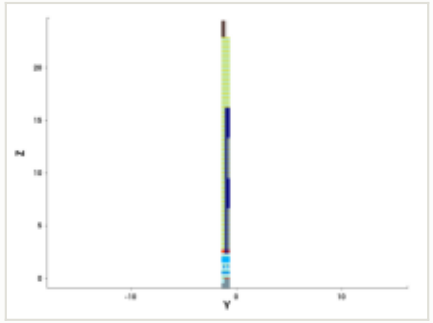

y cut at -1.035 µm

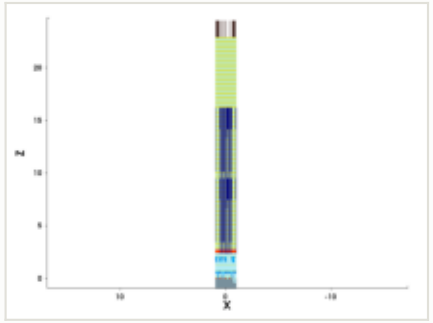

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

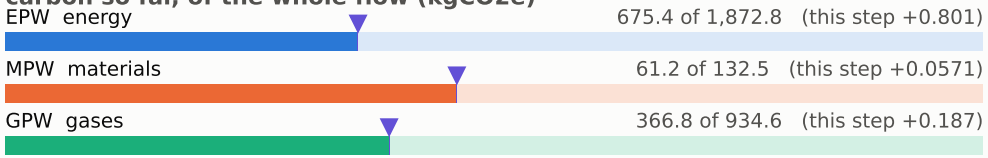

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

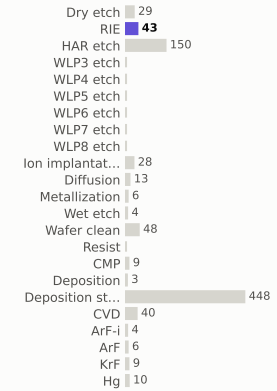

materials deposited (g)

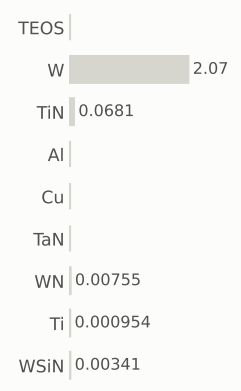

gases emitted (g)

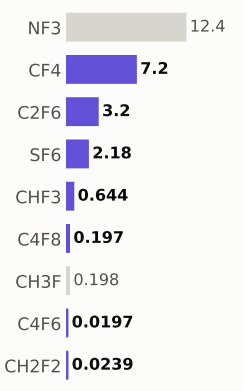

Step #11620: HAR_etch

etch_anisotropic · HAR_etch

1.04	1,104.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

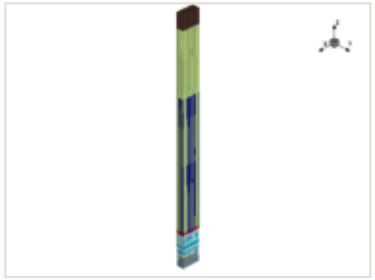

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

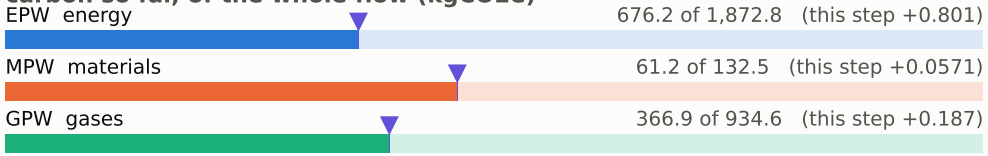

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

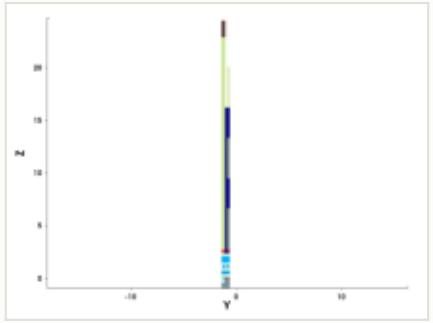

y cut at -1.035 µm

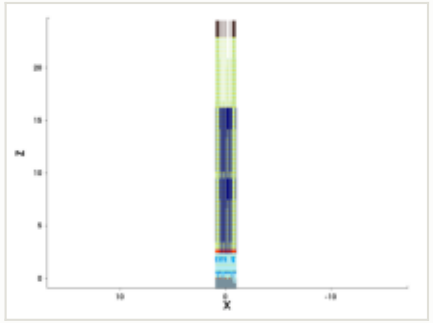

mask for this step

no mask for this step

steps by process area

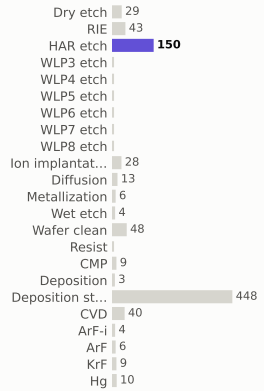

materials deposited (g)

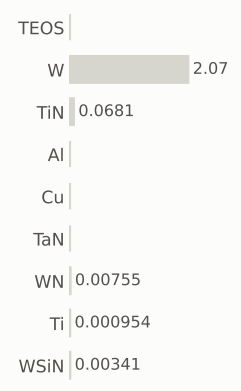

gases emitted (g)

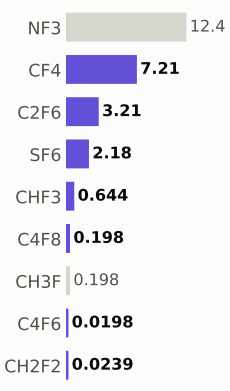

Step #11620.0671: HAR_etch

etch_noop · HAR_etch

1.04	1,105.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

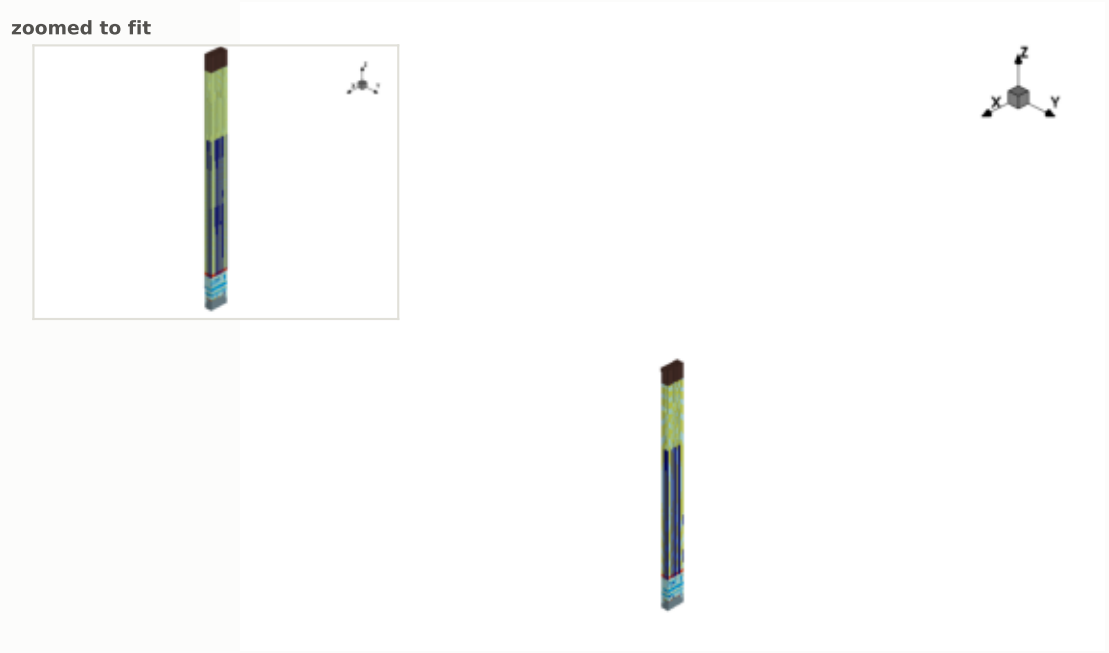

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

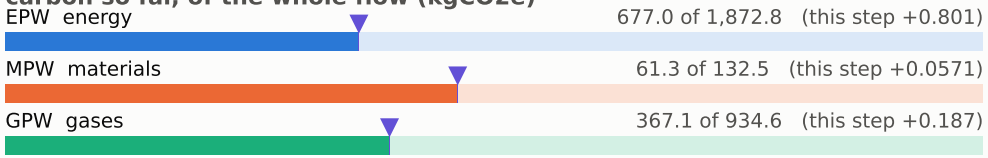

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

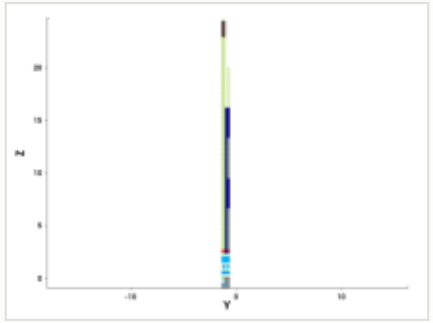

y cut at -1.035 µm

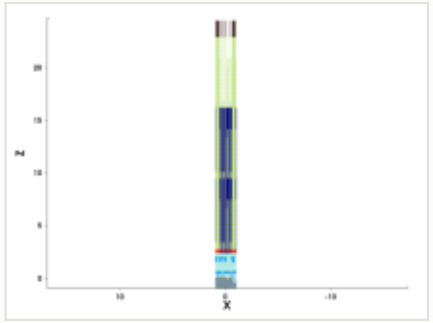

mask for this step

no mask for this step

steps by process area

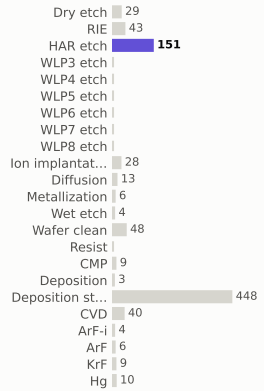

materials deposited (g)

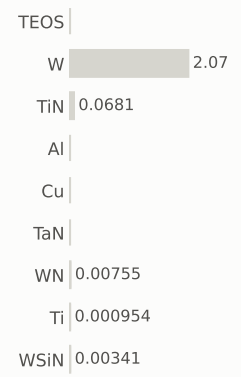

gases emitted (g)

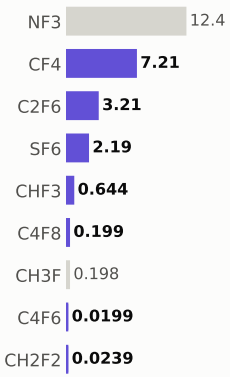

Step #11620.1342: HAR_etch

etch_noop · HAR_etch

1.04	1,106.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

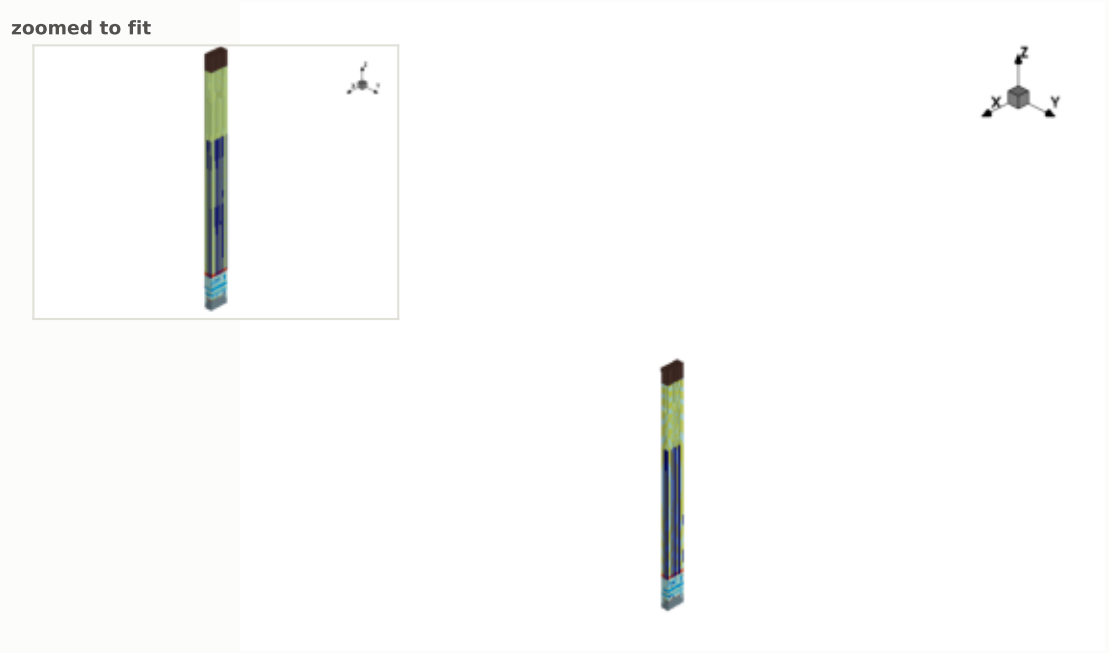

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

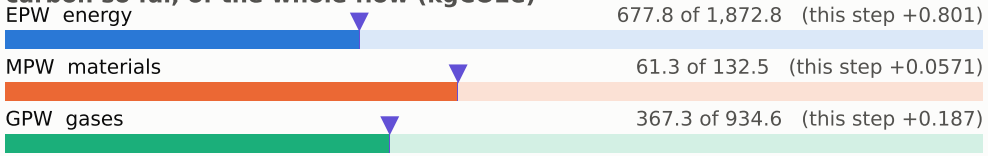

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

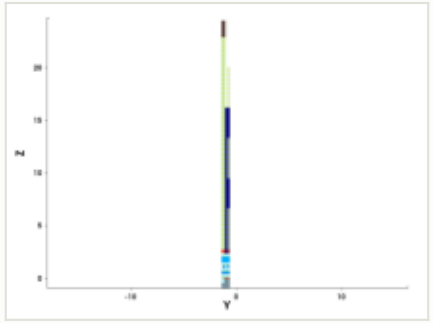

y cut at -1.035 µm

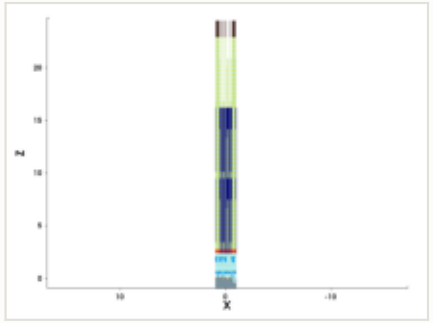

mask for this step

no mask for this step

steps by process area

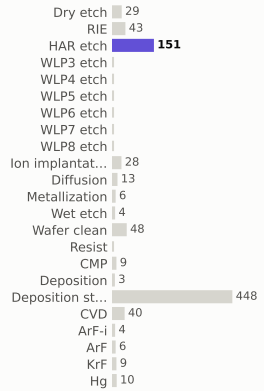

materials deposited (g)

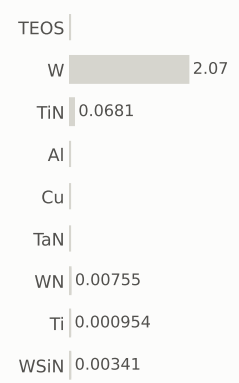

gases emitted (g)

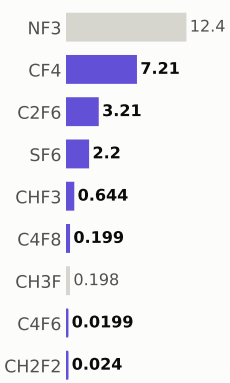

Step #11620.2013: HAR_etch

etch_noop · HAR_etch

1.04	1,107.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

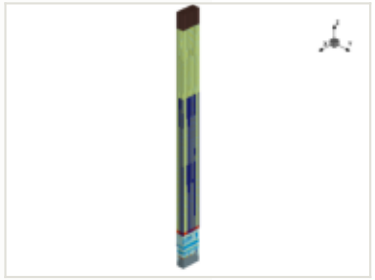

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

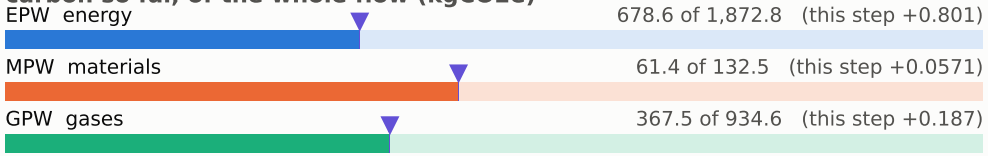

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

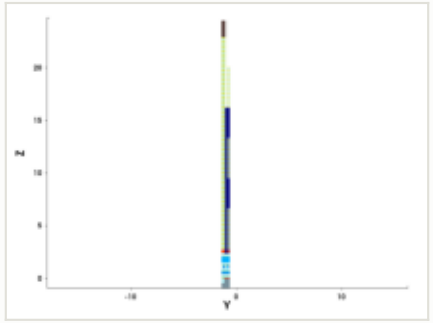

y cut at -1.035 µm

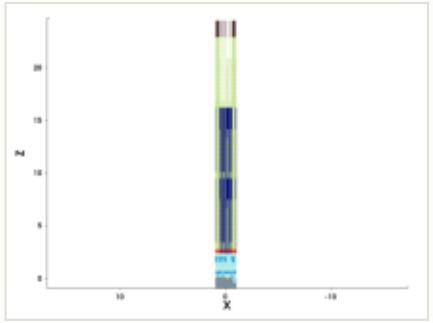

mask for this step

no mask for this step

steps by process area

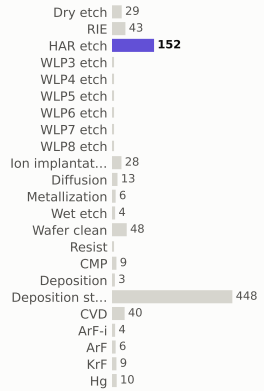

materials deposited (g)

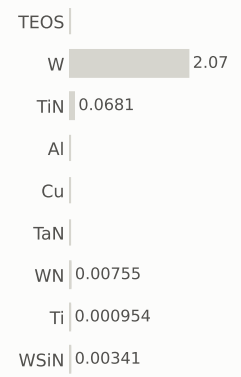

gases emitted (g)

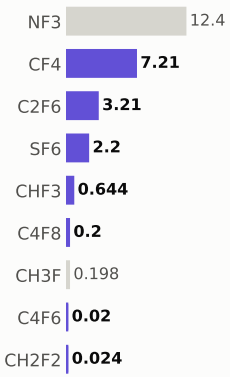

Step #11620.2685: HAR_etch

etch_noop · HAR_etch

1.04	1,108.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

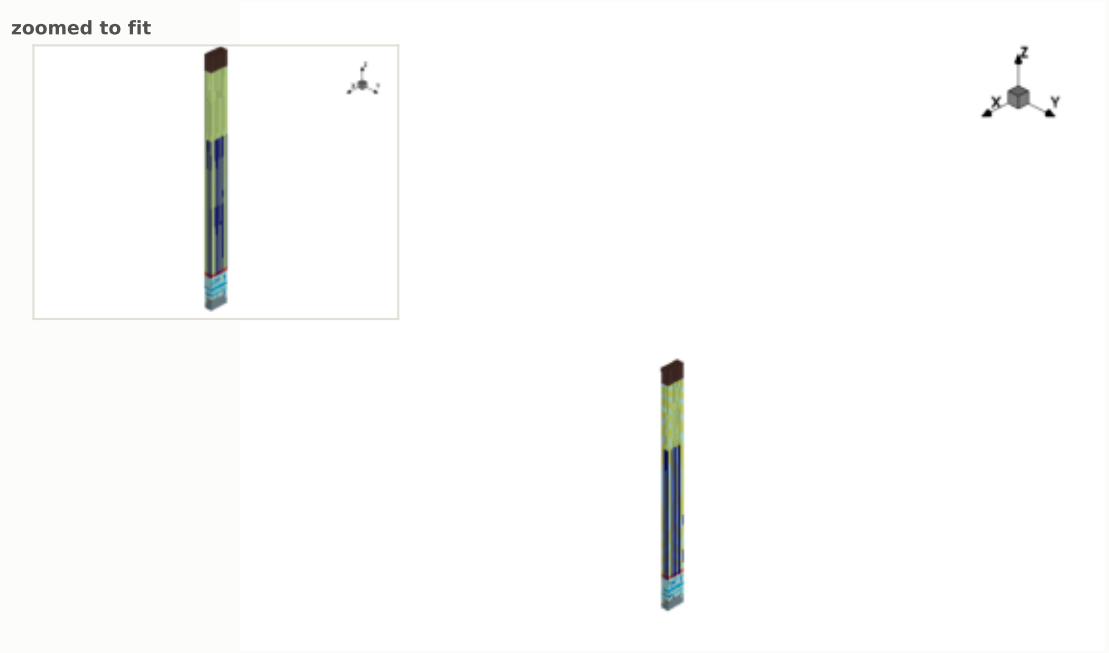

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

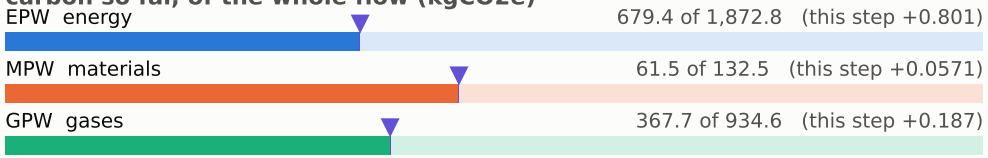

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

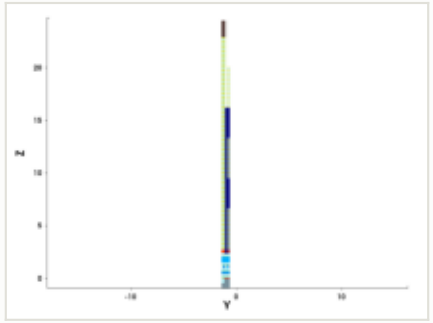

y cut at -1.035 µm

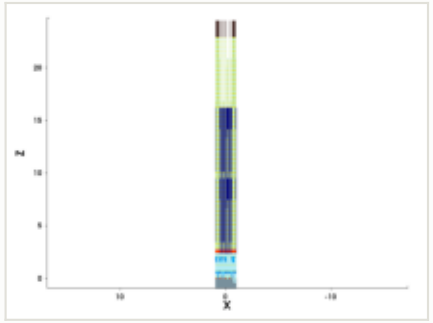

mask for this step

no mask for this step

steps by process area

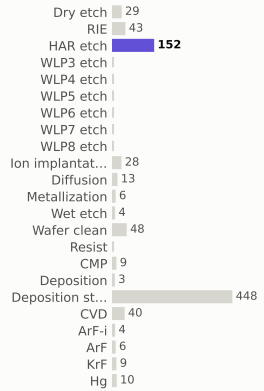

materials deposited (g)

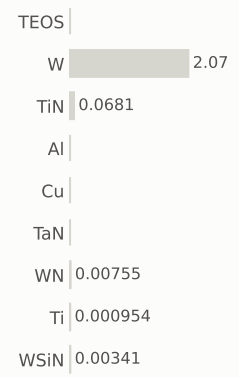

gases emitted (g)

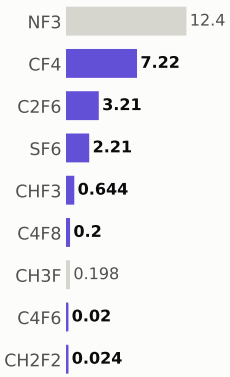

Step #11620.3356: HAR_etch

etch_noop · HAR_etch

1.04	1,109.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

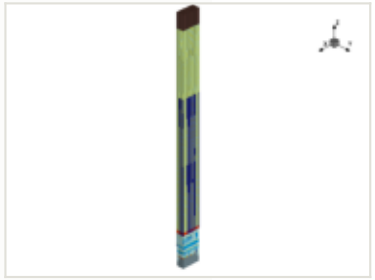

x cut at 0.000 µm

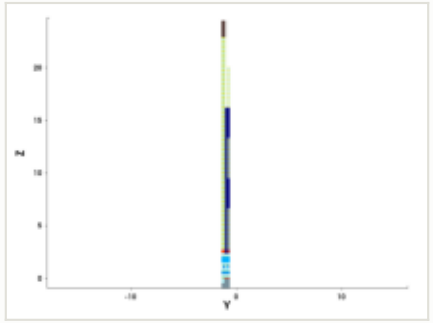

y cut at -1.035 µm

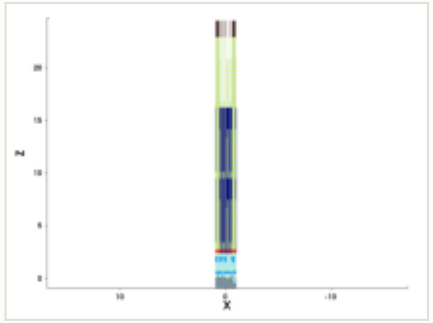

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

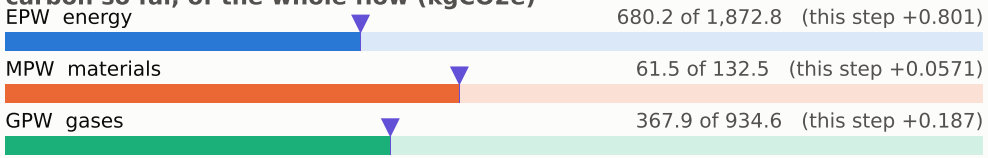

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

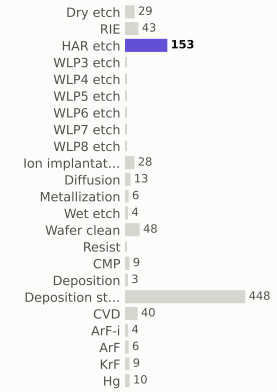

materials deposited (g)

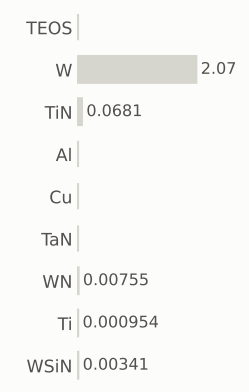

gases emitted (g)

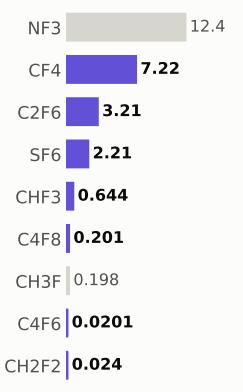

Step #11620.4027: HAR_etch

etch_noop · HAR_etch

1.04	1,110.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

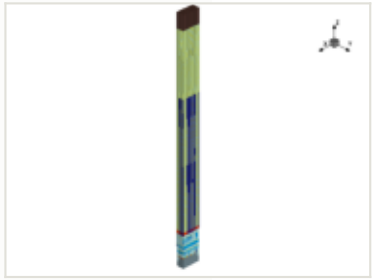

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

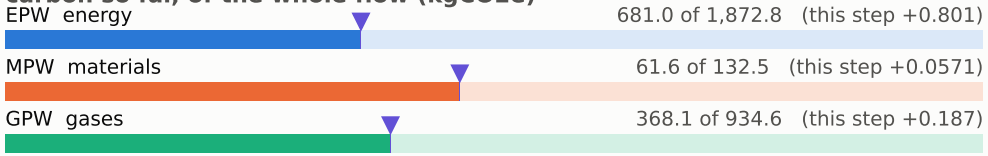

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

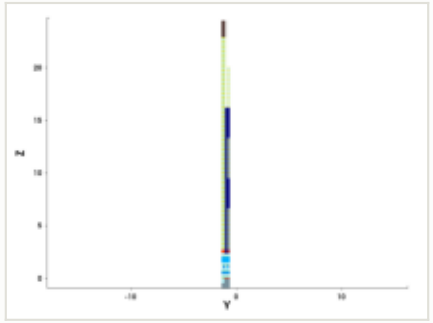

y cut at -1.035 µm

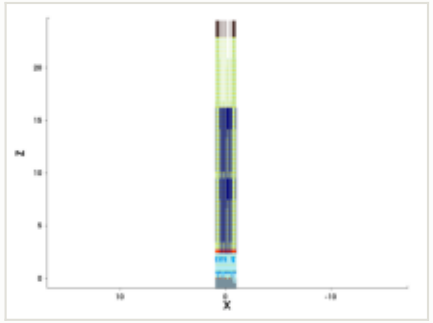

mask for this step

no mask for this step

steps by process area

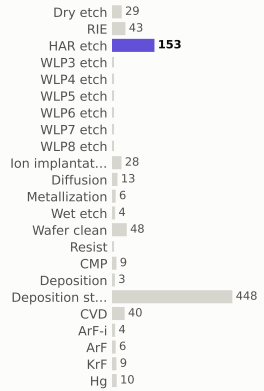

materials deposited (g)

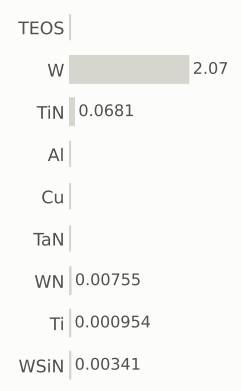

gases emitted (g)

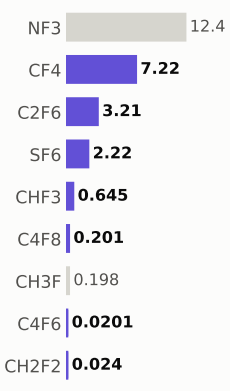

Step #11620.4698: HAR_etch

etch_noop · HAR_etch

1.04	1,111.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

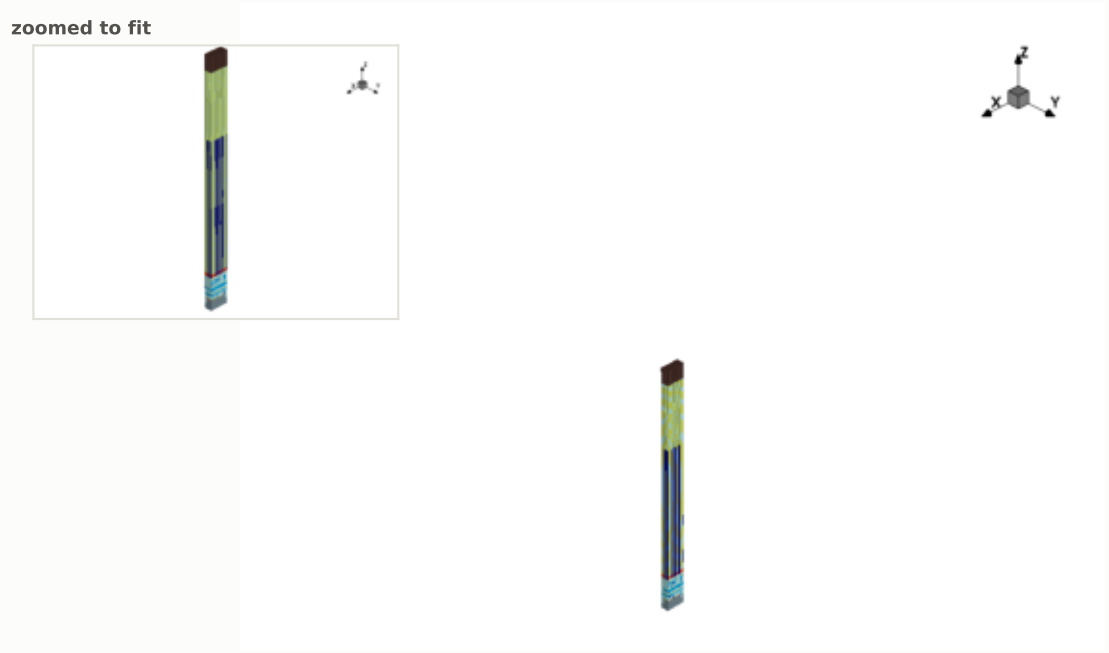

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

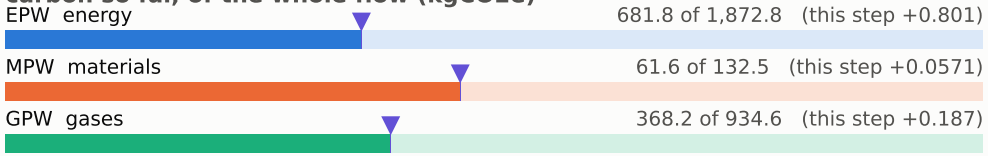

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

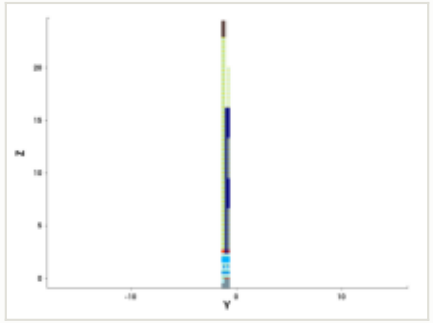

y cut at -1.035 µm

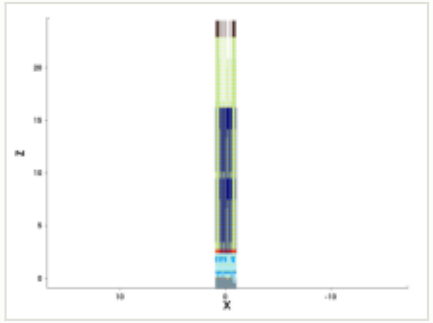

mask for this step

no mask for this step

steps by process area

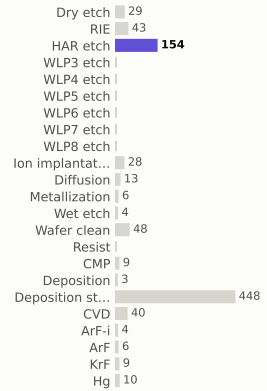

materials deposited (g)

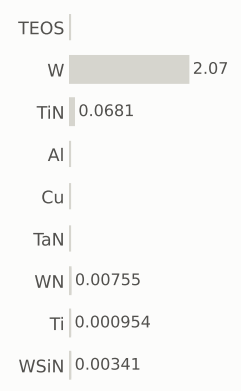

gases emitted (g)

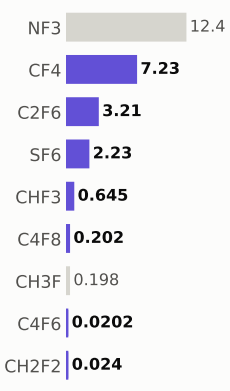

Step #11620.5369: HAR_etch

etch_noop · HAR_etch

1.04	1,112.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

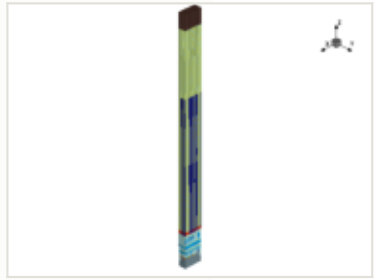

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

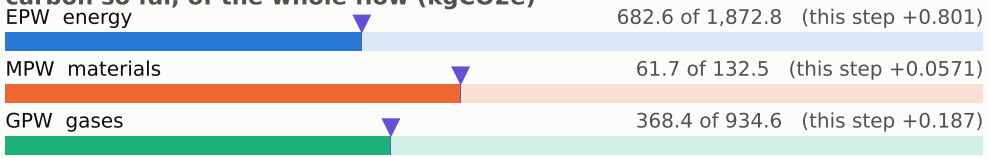

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

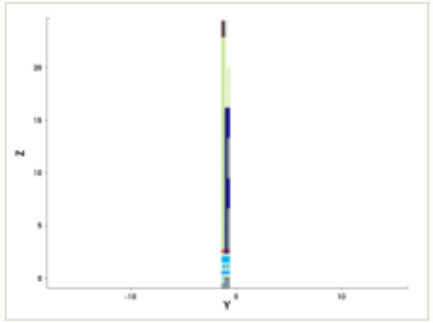

y cut at -1.035 µm

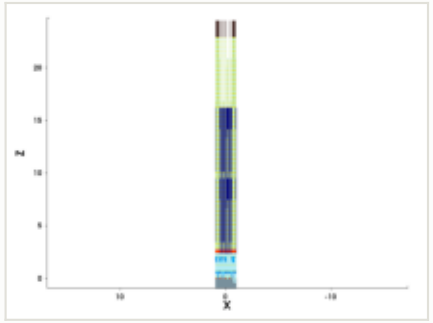

mask for this step

no mask for this step

steps by process area

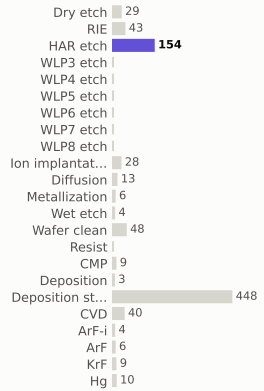

materials deposited (g)

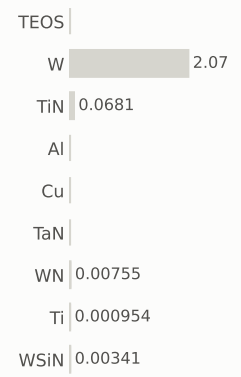

gases emitted (g)

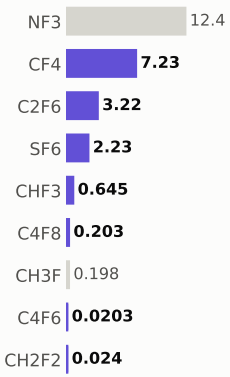

Step #11620.604: HAR_etch

etch_noop · HAR_etch

1.04	1,113.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

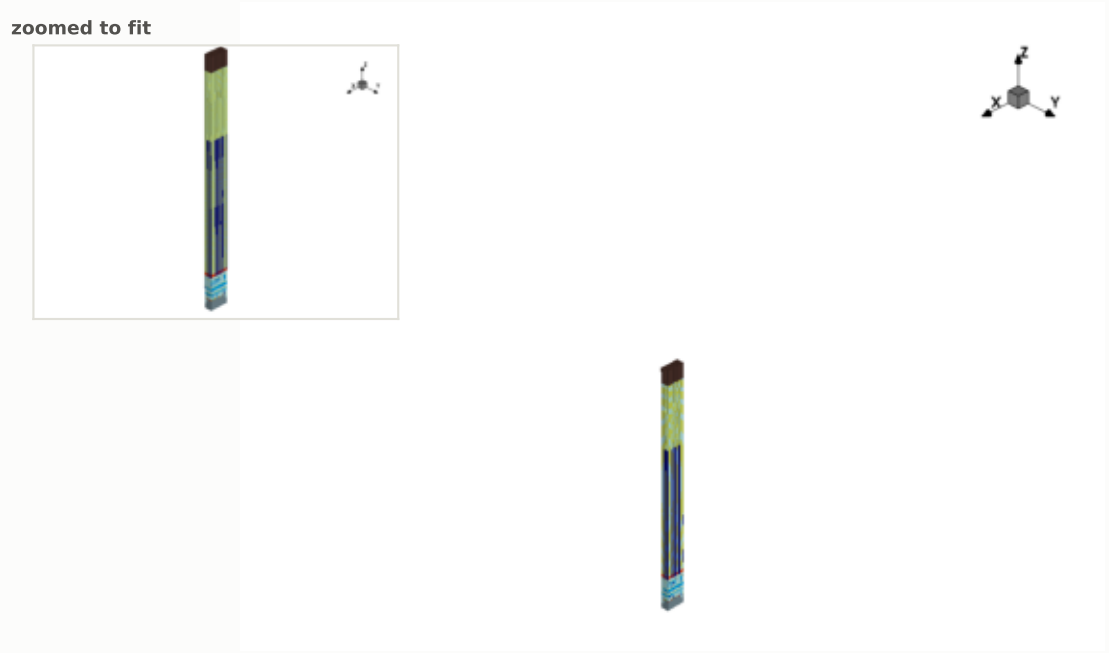

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

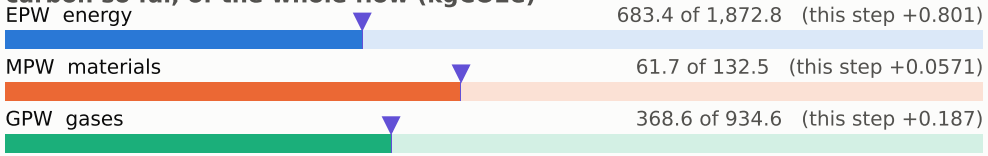

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

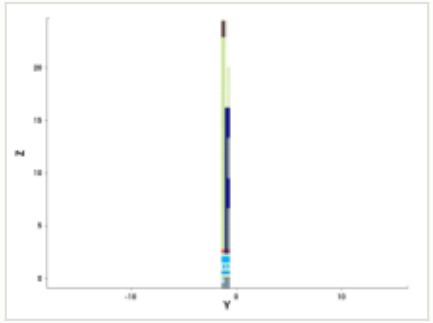

y cut at -1.035 µm

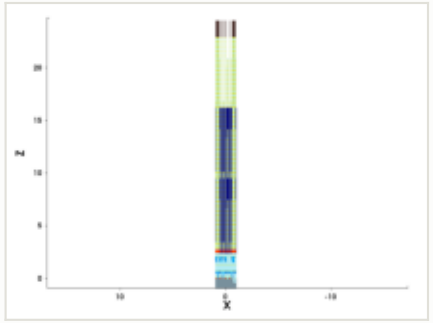

mask for this step

no mask for this step

steps by process area

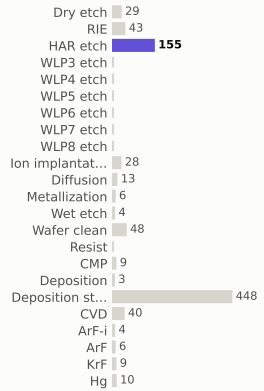

materials deposited (g)

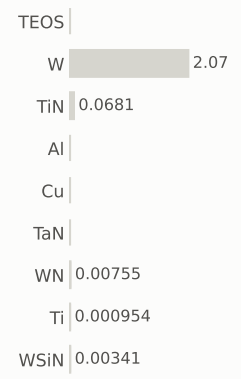

gases emitted (g)

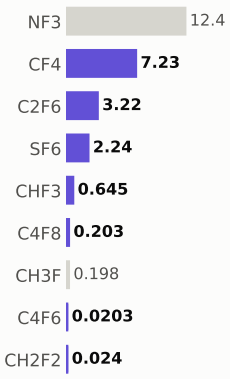

Step #11620.6711: HAR_etch

etch_noop · HAR_etch

1.04	1,114.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

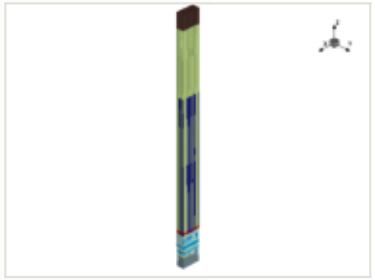

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

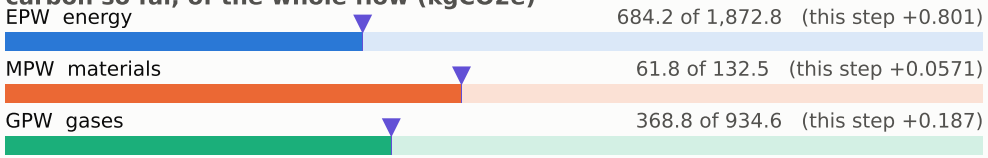

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

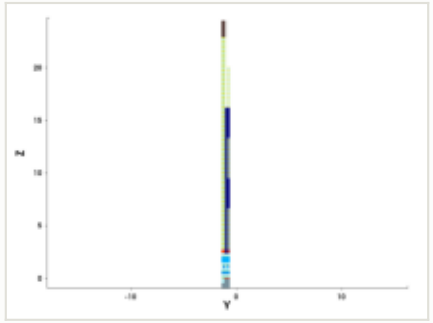

y cut at -1.035 µm

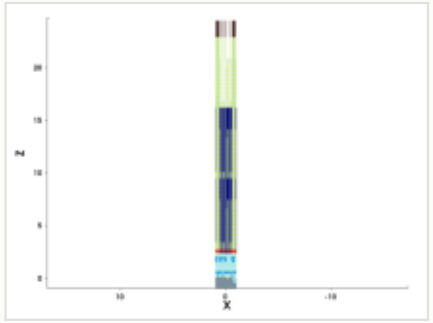

mask for this step

no mask for this step

steps by process area

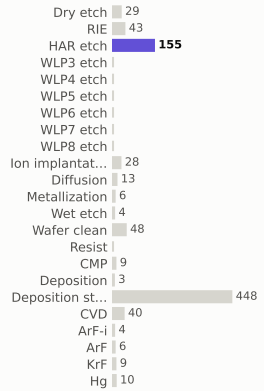

materials deposited (g)

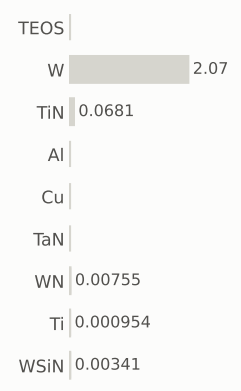

gases emitted (g)

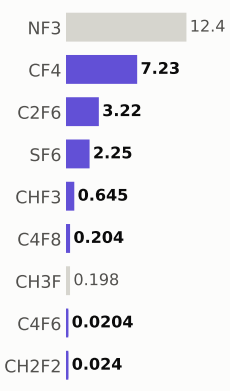

Step #11620.7383: HAR_etch

etch_noop · HAR_etch

1.04	1,115.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

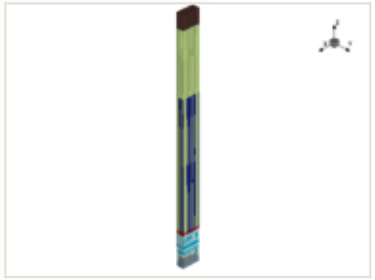

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

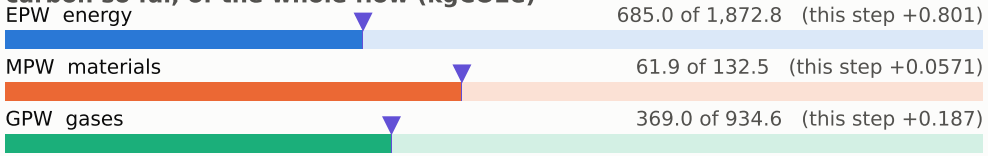

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

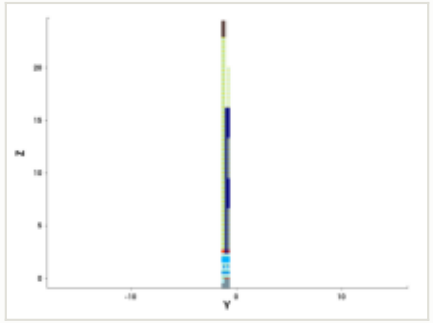

y cut at -1.035 µm

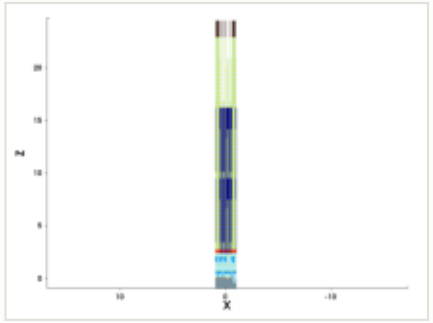

mask for this step

no mask for this step

steps by process area

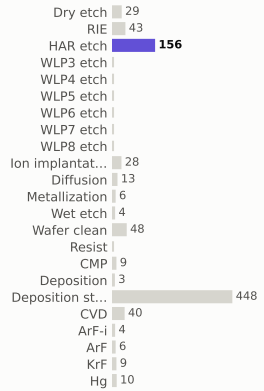

materials deposited (g)

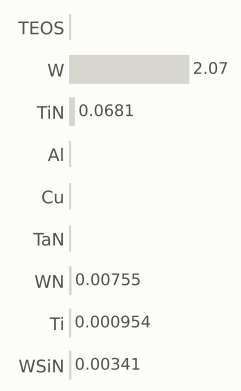

gases emitted (g)

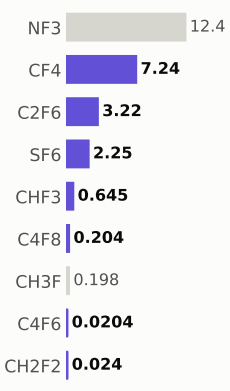

Step #11620.8054: HAR_etch

etch_noop · HAR_etch

1.04	1,116.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

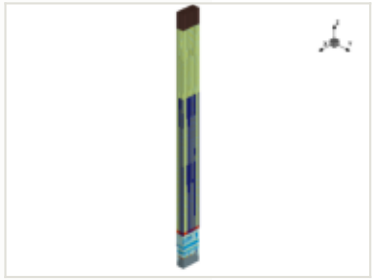

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

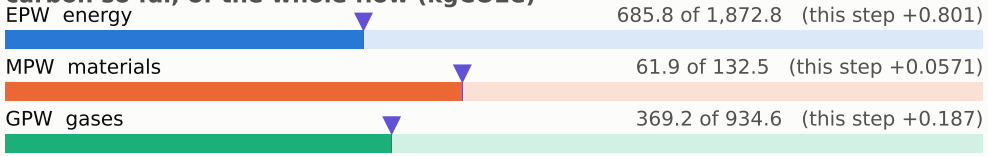

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

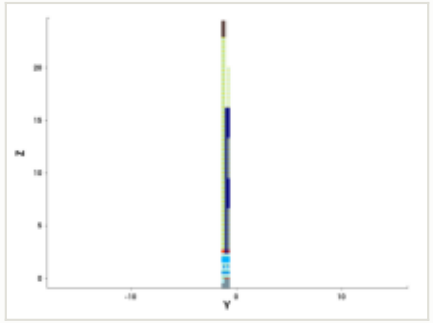

y cut at -1.035 µm

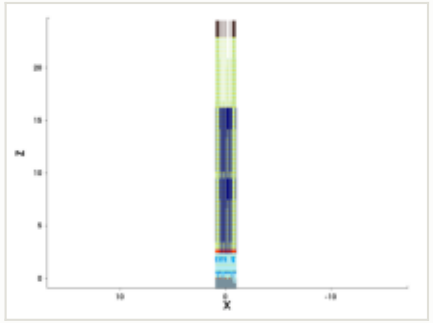

mask for this step

no mask for this step

steps by process area

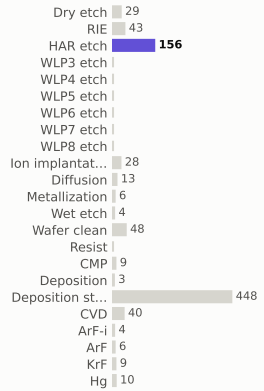

materials deposited (g)

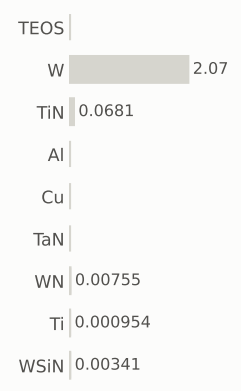

gases emitted (g)

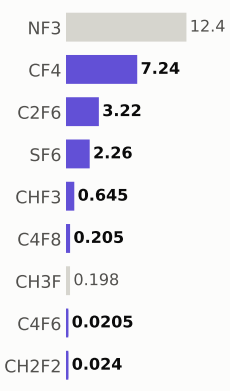

Step #11620.8725: HAR_etch

etch_noop · HAR_etch

1.04	1,117.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

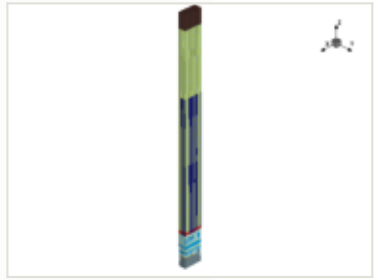



x cut at 0.000 µm

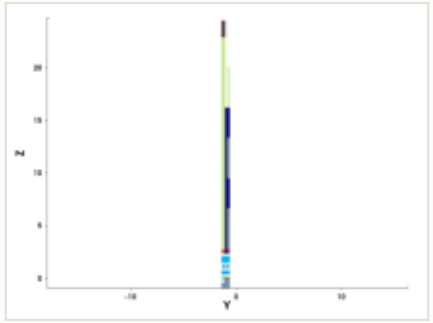

y cut at -1.035 µm

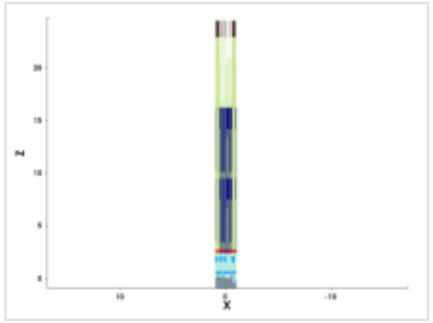

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

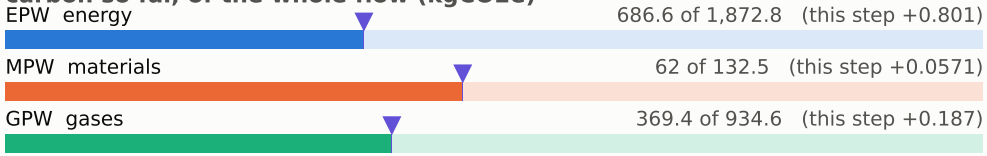

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

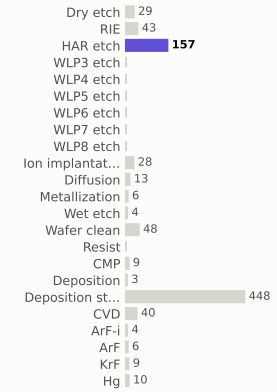

materials deposited (g)

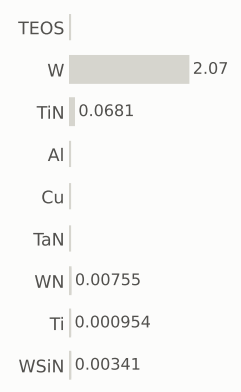

gases emitted (g)

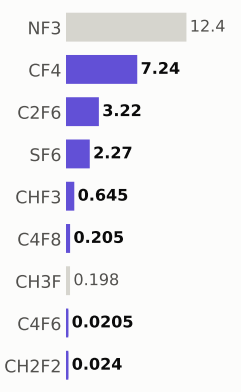

Step #11620.9396: HAR_etch

etch_noop · HAR_etch

1.04	1,119.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

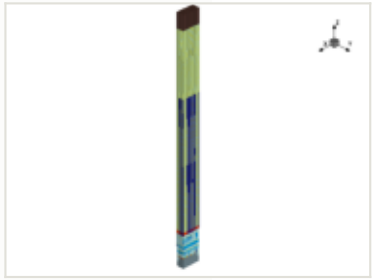

x cut at 0.000 µm

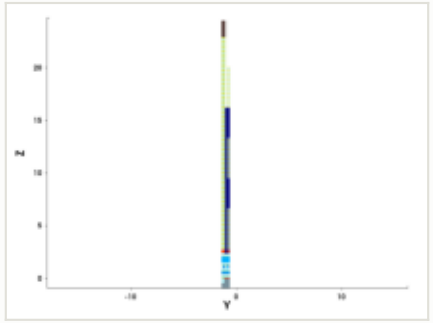

y cut at -1.035 µm

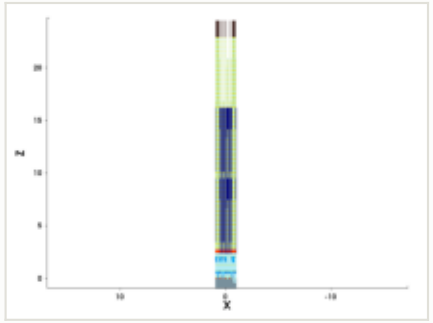

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

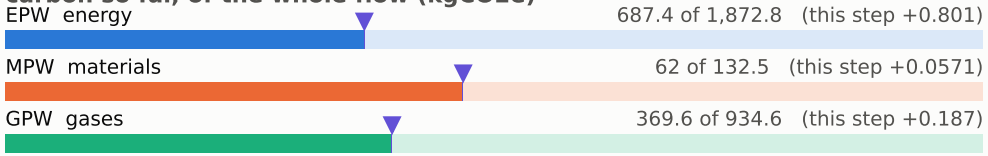

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

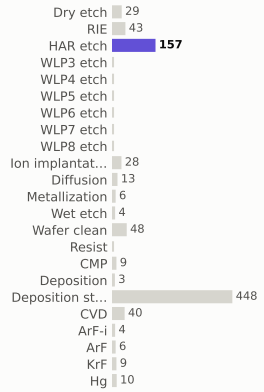

materials deposited (g)

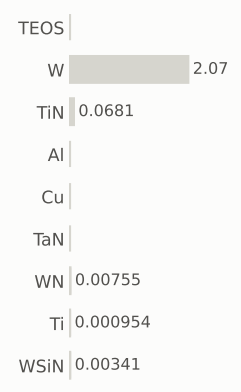

gases emitted (g)



Step #11621.0067: HAR_etch

etch_noop · HAR_etch

1.04	1,120.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

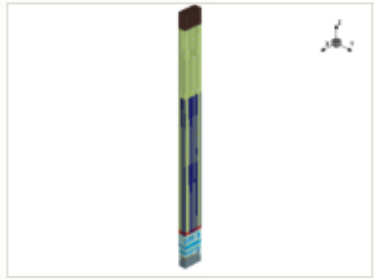

x cut at 0.000 µm

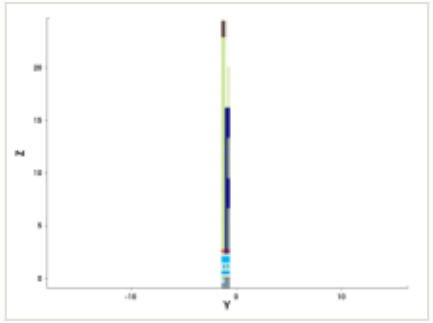

y cut at -1.035 µm

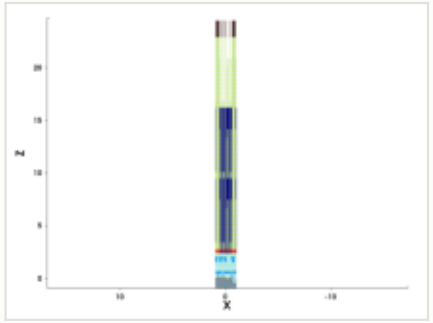

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

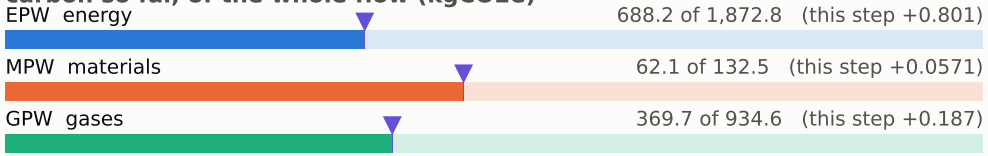

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

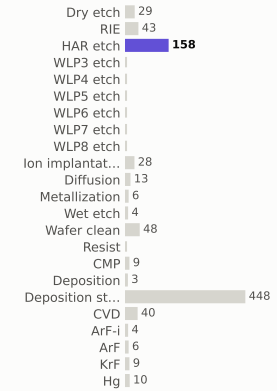

materials deposited (g)

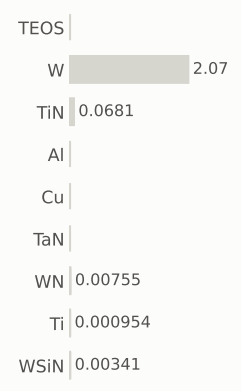

gases emitted (g)

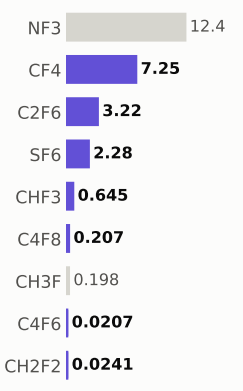

Step #11621.0738: HAR_etch

etch_noop · HAR_etch

1.04	1,121.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

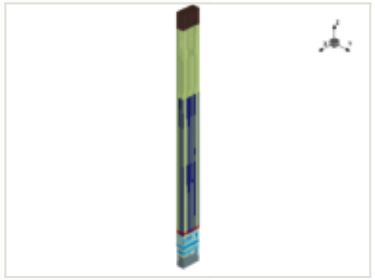

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

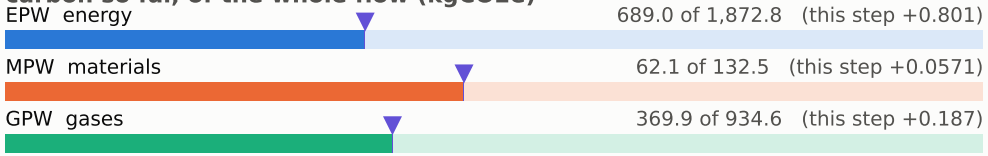

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

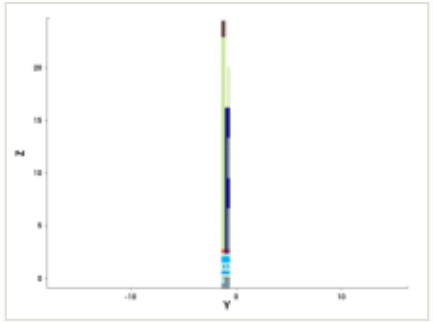

y cut at -1.035 µm

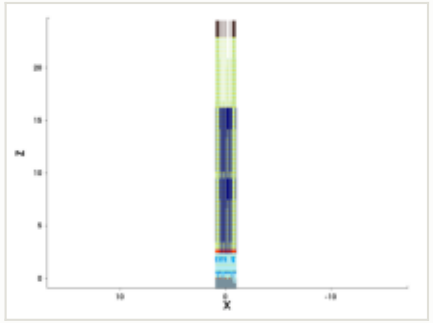

mask for this step

no mask for this step

steps by process area

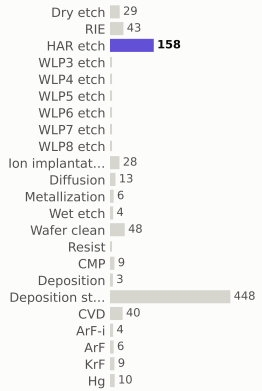

materials deposited (g)

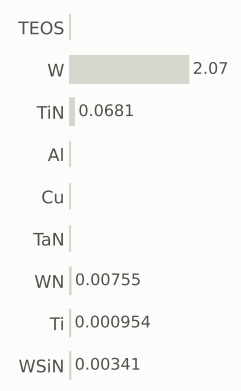

gases emitted (g)

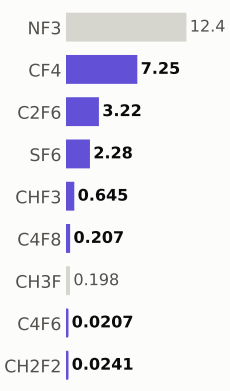

Step #11621.1409: HAR_etch

etch_noop · HAR_etch

1.04	1,122.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

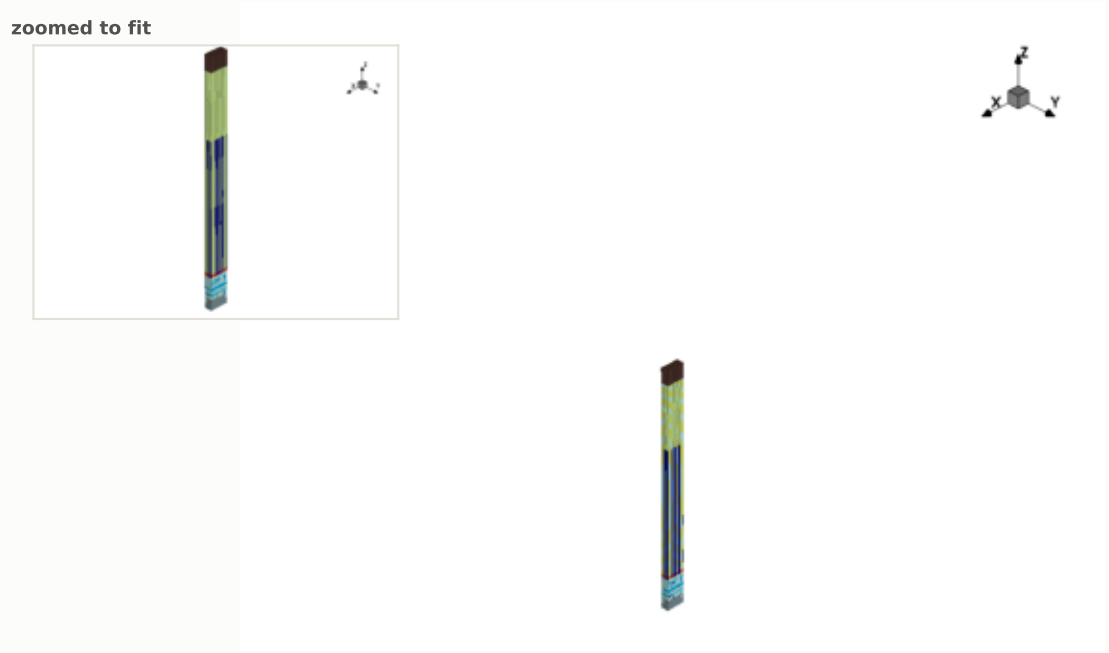

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

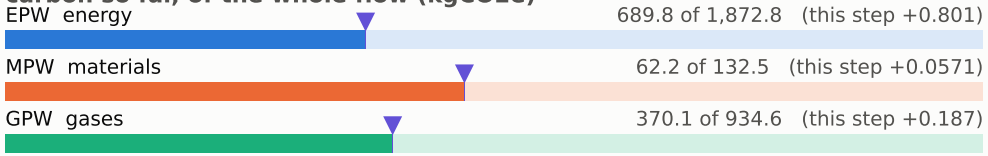

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

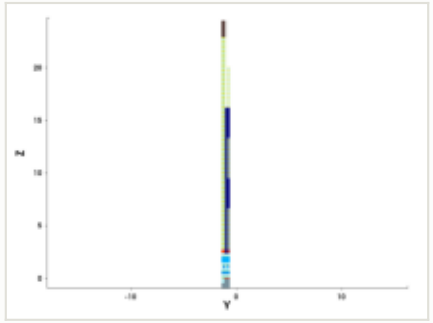

y cut at -1.035 µm

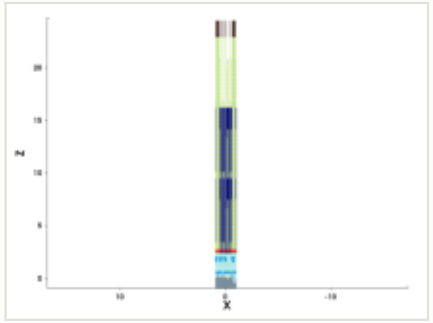

mask for this step

no mask for this step

steps by process area

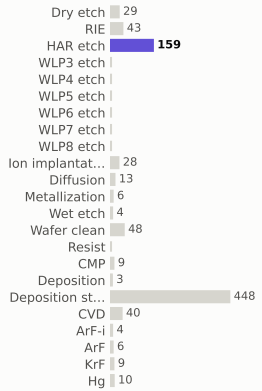

materials deposited (g)

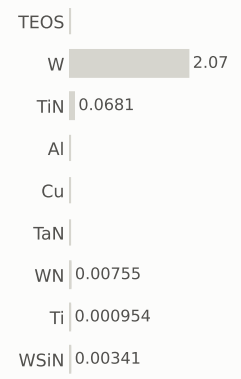

gases emitted (g)

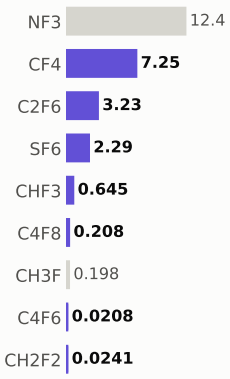

Step #11621.2081: HAR_etch

etch_noop · HAR_etch

1.04	1,123.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

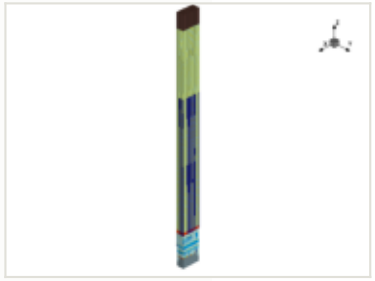

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

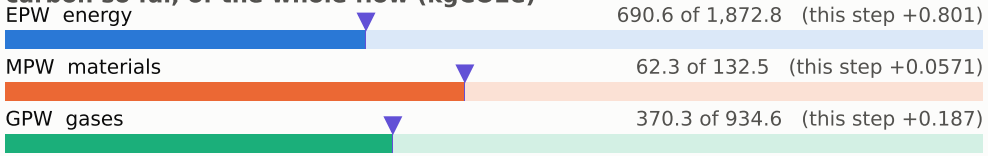

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

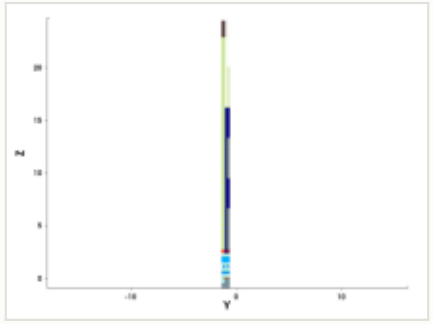

y cut at -1.035 µm

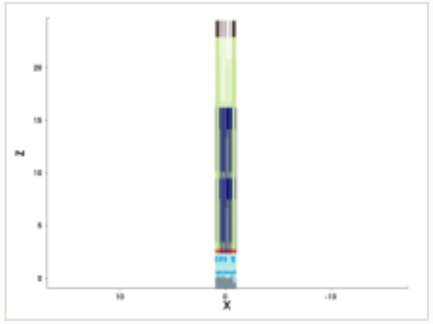

mask for this step

no mask for this step

steps by process area

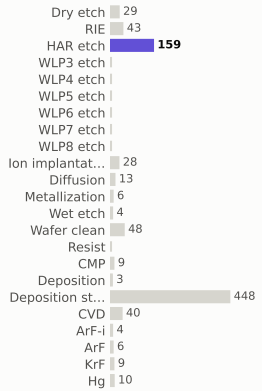

materials deposited (g)

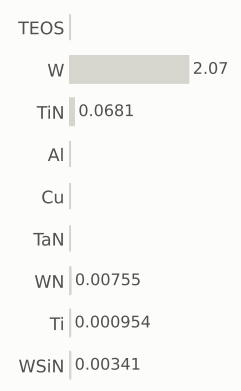

gases emitted (g)

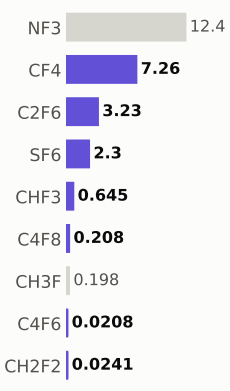

Step #11621.2752: HAR_etch

etch_noop · HAR_etch

1.04	1,124.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

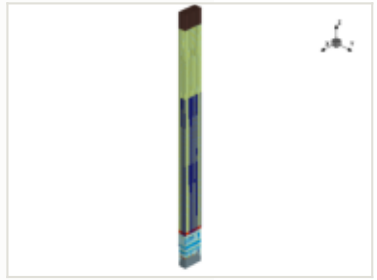

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

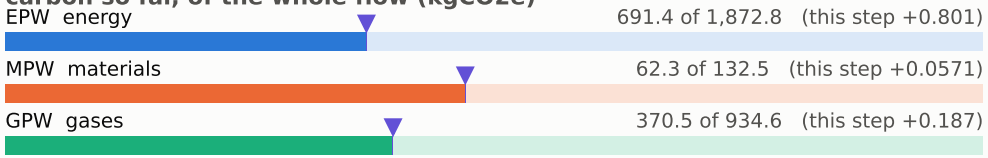

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

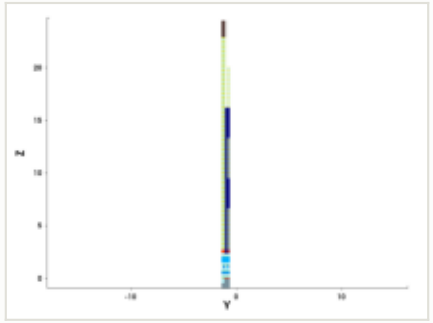

y cut at -1.035 µm

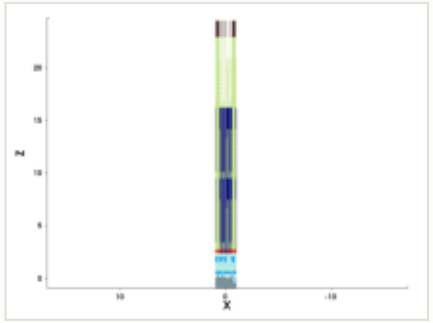

mask for this step

no mask for this step

steps by process area

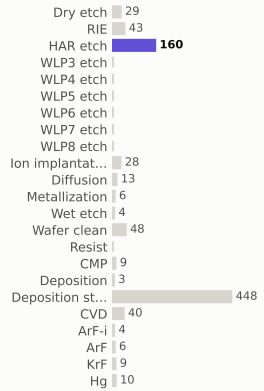

materials deposited (g)

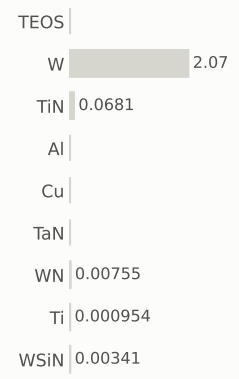

gases emitted (g)

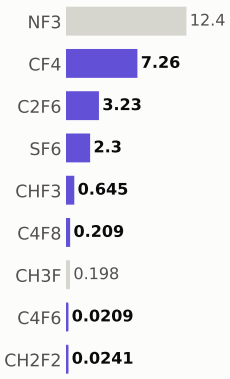

Step #11621.3423: HAR_etch

etch_noop · HAR_etch

1.04	1,125.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

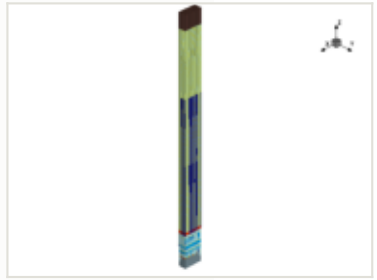

x cut at 0.000 µm

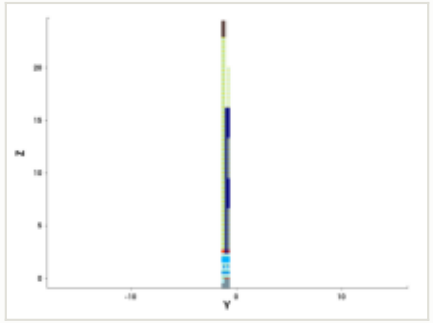

y cut at -1.035 µm

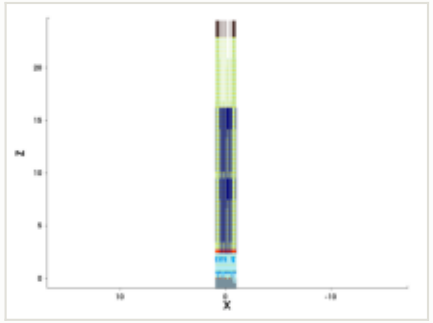

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

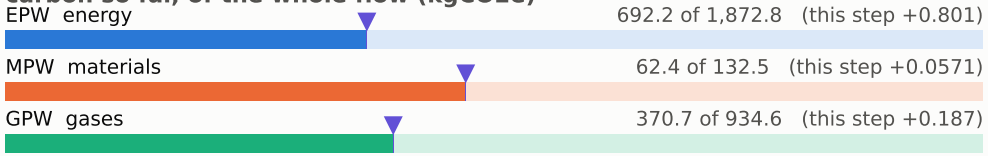

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

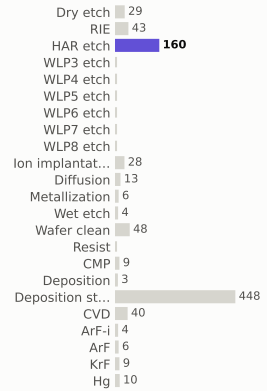

materials deposited (g)

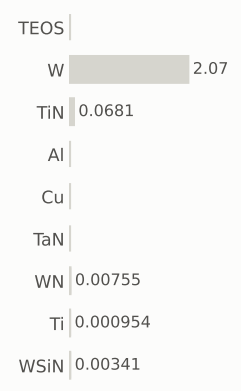

gases emitted (g)

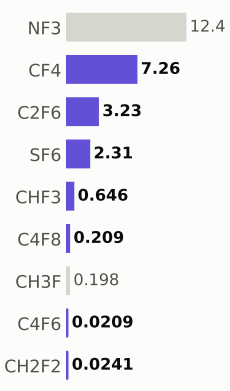

Step #11621.4094: HAR_etch

etch_noop · HAR_etch

1.04	1,126.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

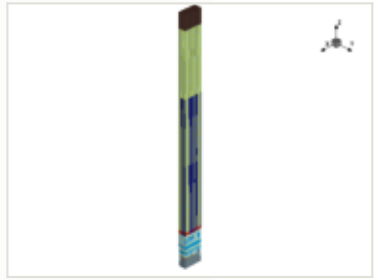

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

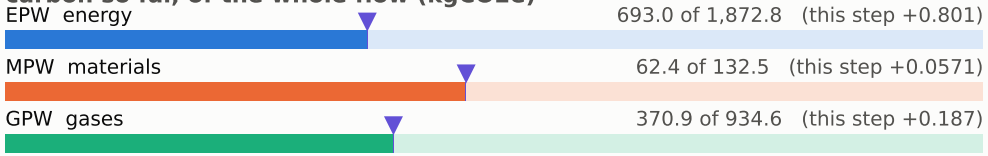

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

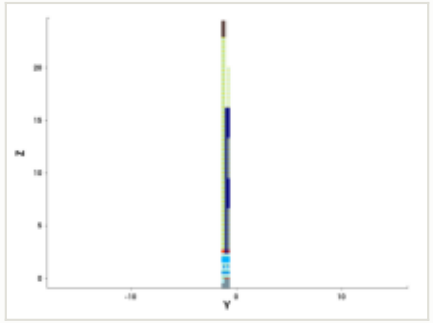

y cut at -1.035 µm

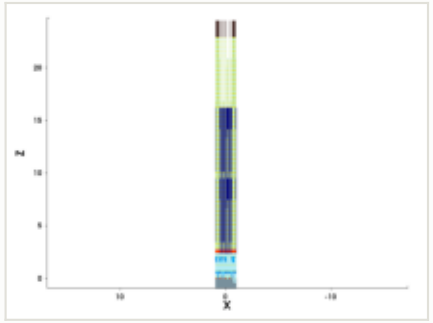

mask for this step

no mask for this step

steps by process area

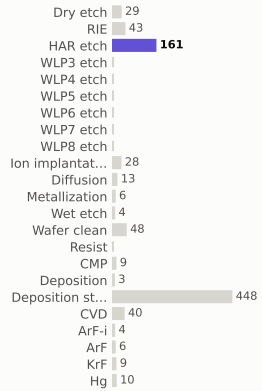

materials deposited (g)

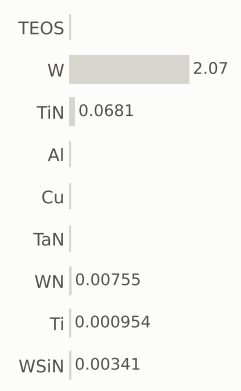

gases emitted (g)

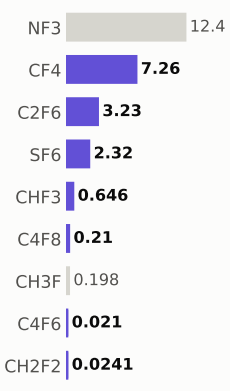

Step #11621.4765: HAR_etch

etch_noop · HAR_etch

1.04	1,127.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

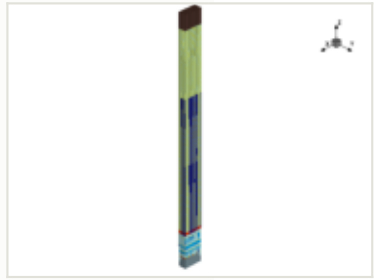

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

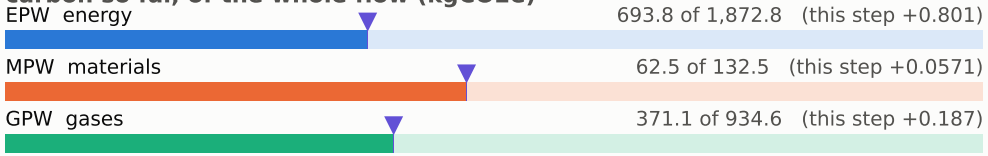

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

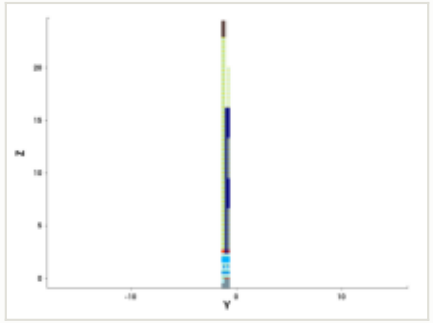

y cut at -1.035 µm

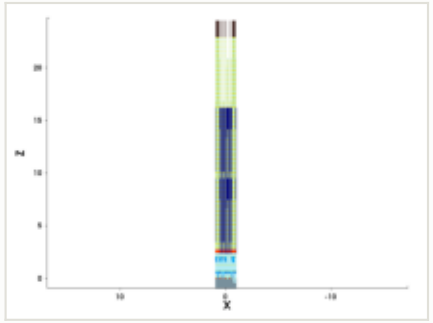

mask for this step

no mask for this step

steps by process area

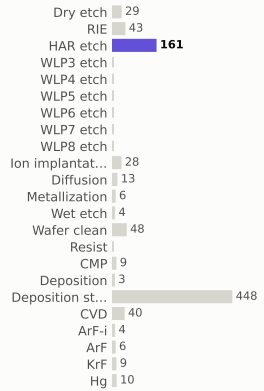

materials deposited (g)

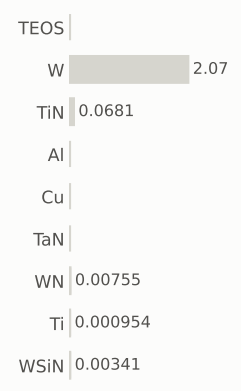

gases emitted (g)

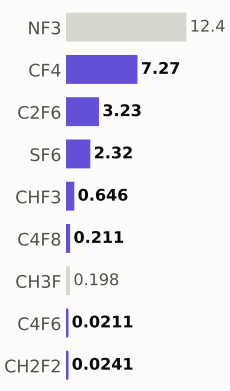

Step #11621.5436: HAR_etch

etch_noop · HAR_etch

1.04	1,128.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

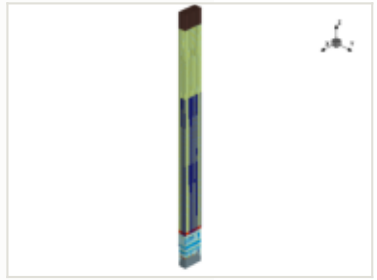



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

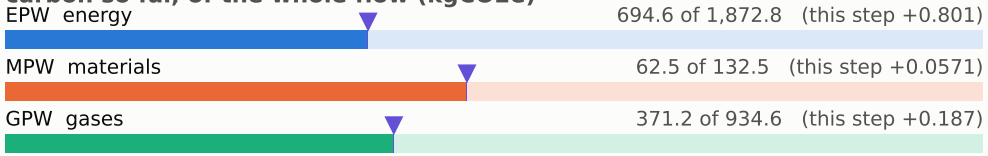

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

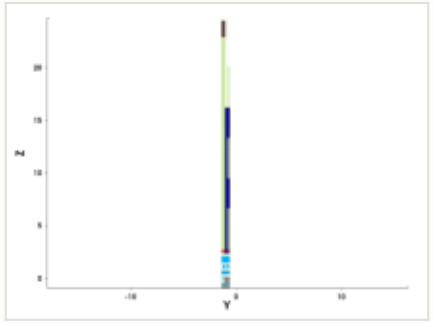

y cut at -1.035 µm

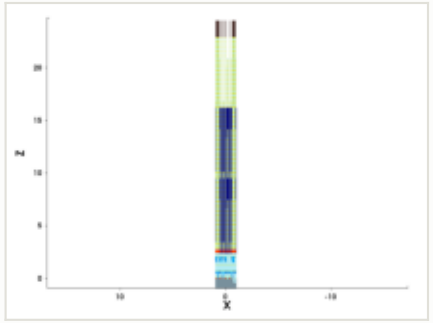

mask for this step

no mask for this step

steps by process area

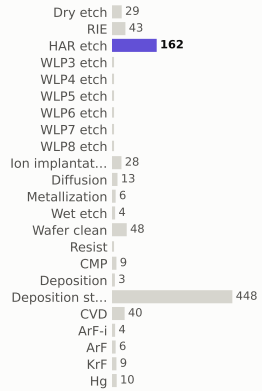

materials deposited (g)

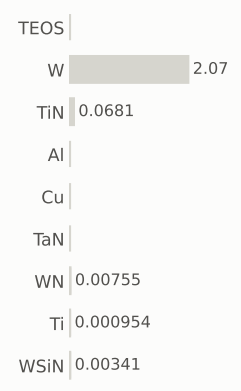

gases emitted (g)

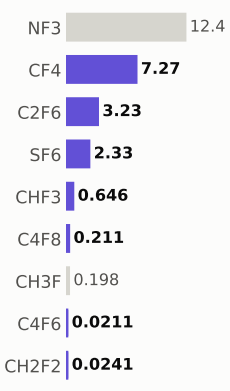

Step #11621.6107: HAR_etch

etch_noop · HAR_etch

1.04	1,129.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

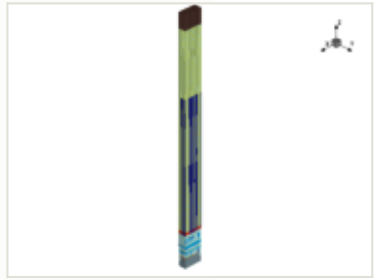

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

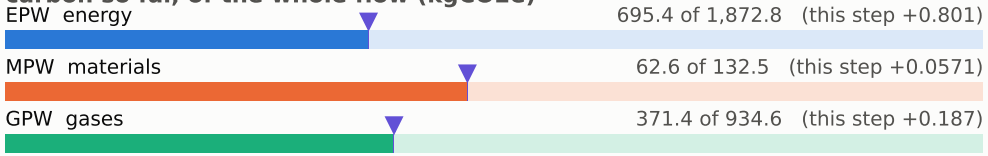

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

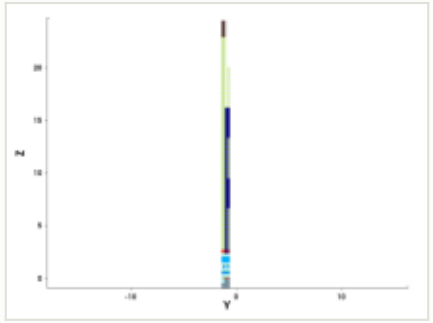

y cut at -1.035 µm

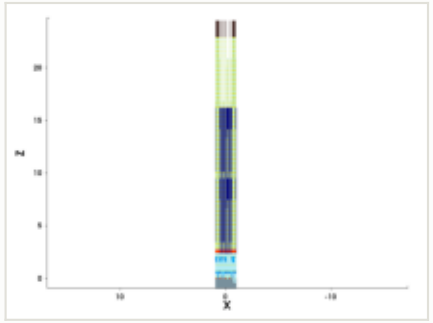

mask for this step

no mask for this step

steps by process area

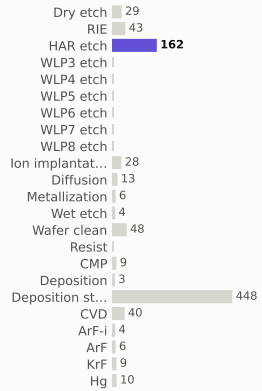

materials deposited (g)

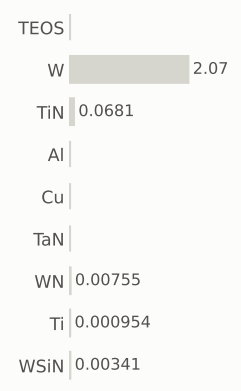

gases emitted (g)

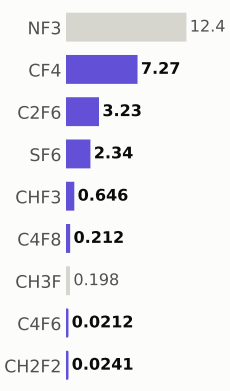

Step #11621.6779: HAR_etch

etch_noop · HAR_etch

1.04	1,130.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

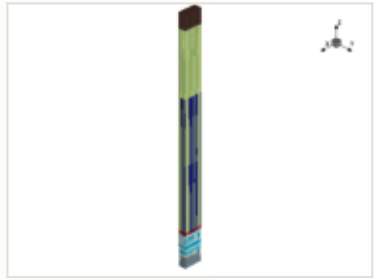

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

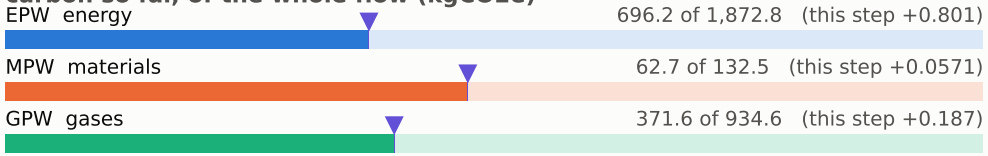

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

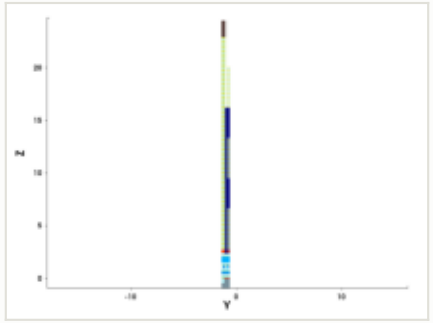

y cut at -1.035 µm

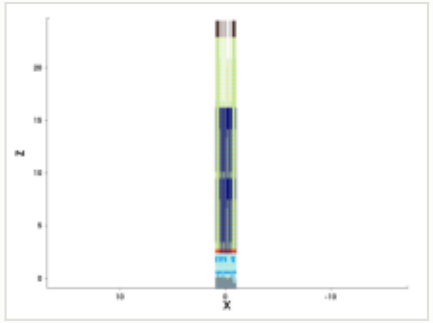

mask for this step

no mask for this step

steps by process area

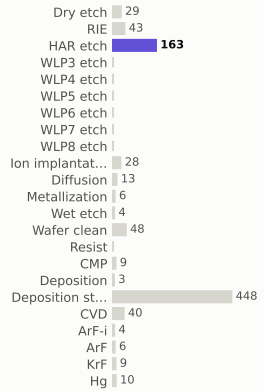

materials deposited (g)

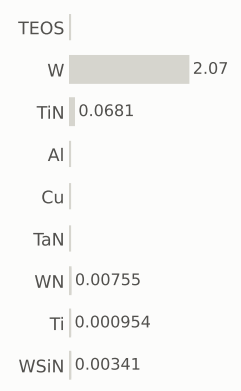

gases emitted (g)

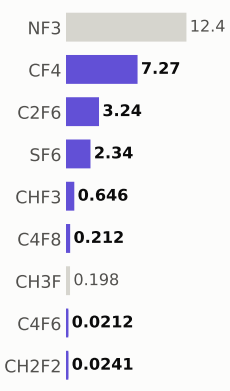

Step #11621.745: HAR_etch

etch_noop · HAR_etch

1.04	1,131.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

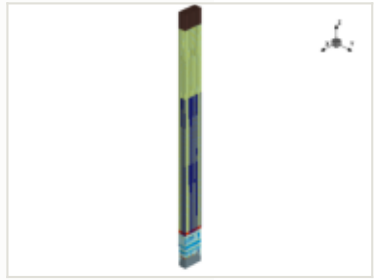



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

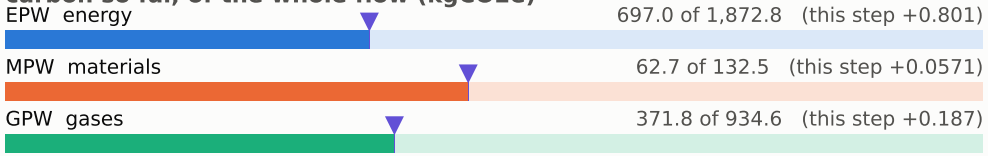

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

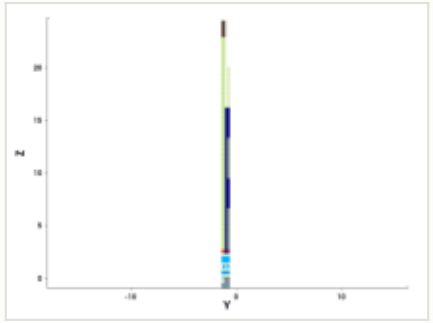

y cut at -1.035 µm

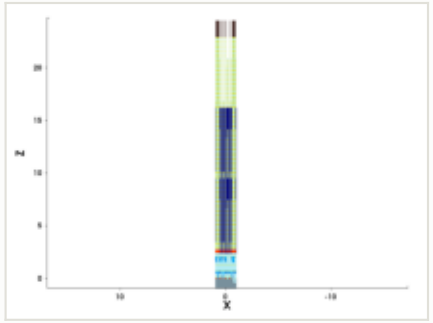

mask for this step

no mask for this step

steps by process area

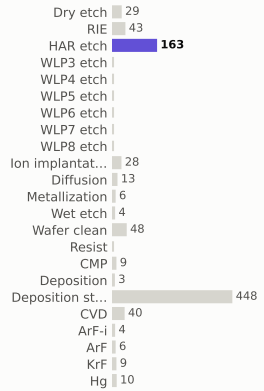

materials deposited (g)

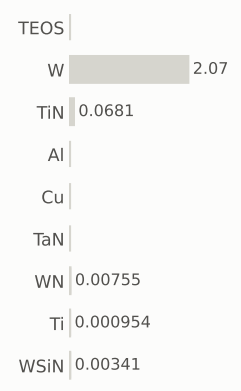

gases emitted (g)

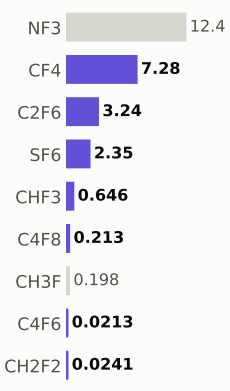

Step #11621.8121: HAR_etch

etch_noop · HAR_etch

1.04	1,132.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

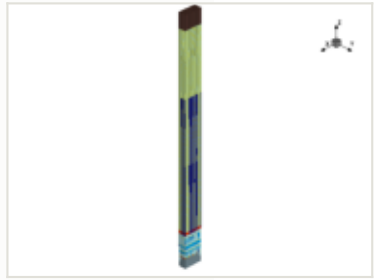

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

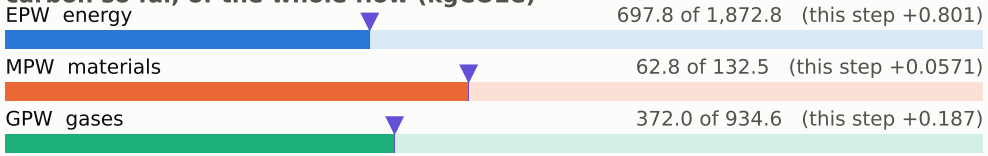

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

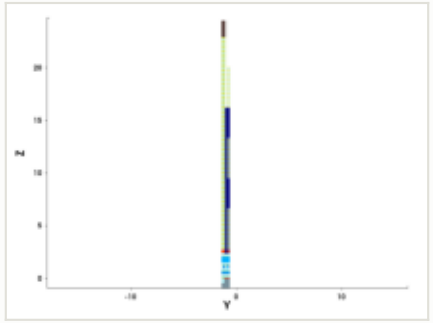

y cut at -1.035 µm

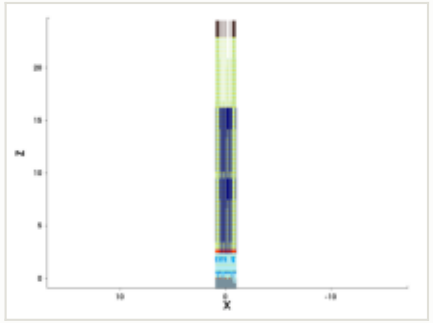

mask for this step

no mask for this step

steps by process area

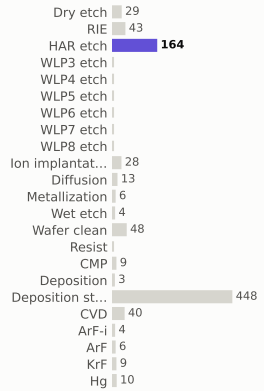

materials deposited (g)

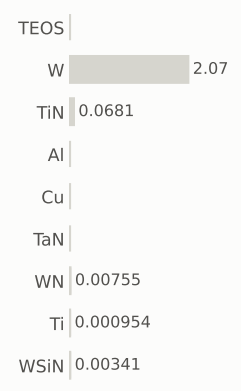

gases emitted (g)

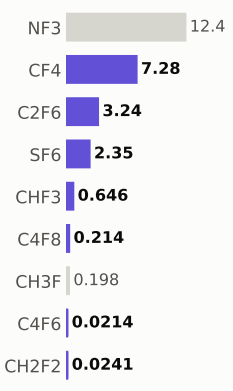

Step #11621.8792: HAR_etch

etch_noop · HAR_etch

1.04	1,133.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

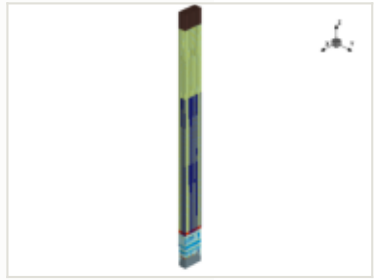

x cut at 0.000 µm

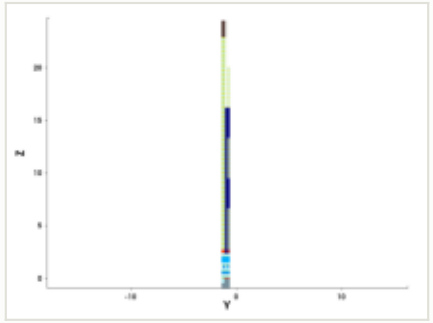

y cut at -1.035 µm

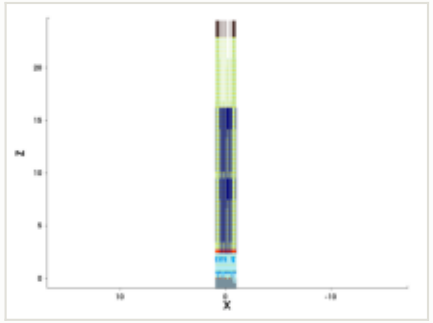

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

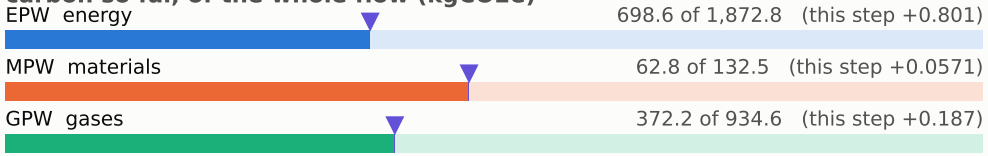

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

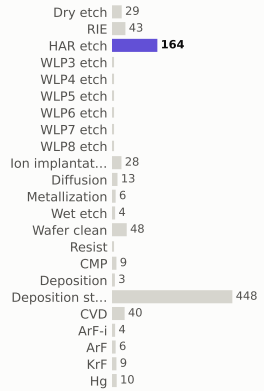

materials deposited (g)

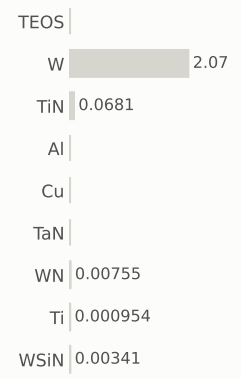

gases emitted (g)

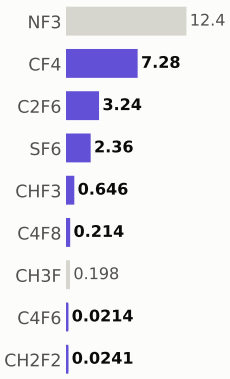

Step #11621.9463: HAR_etch

etch_noop · HAR_etch

1.04	1,134.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

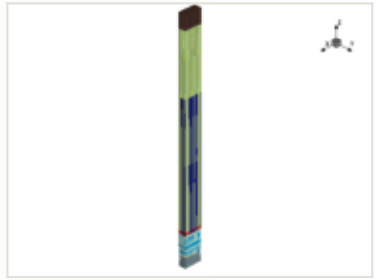

x cut at 0.000 µm

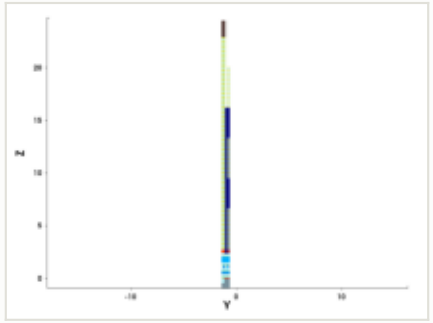

y cut at -1.035 µm

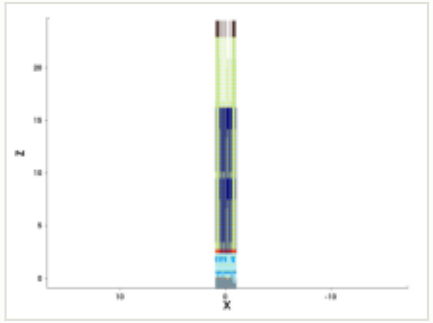

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

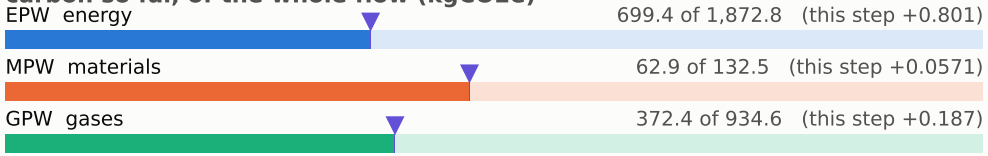

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

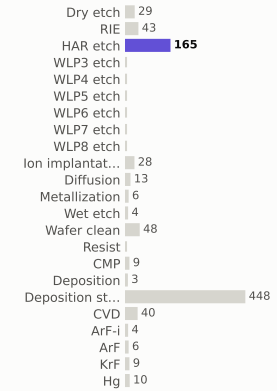

materials deposited (g)

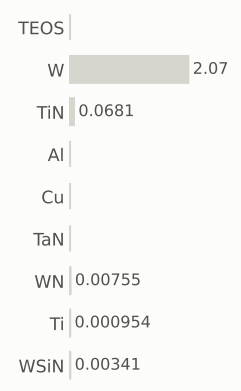

gases emitted (g)

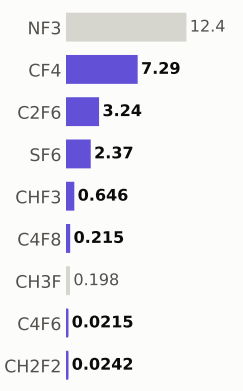

Step #11622.0134: HAR_etch

etch_noop · HAR_etch

1.04	1,135.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

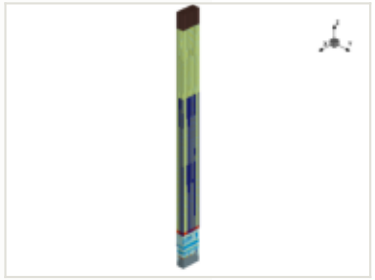

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

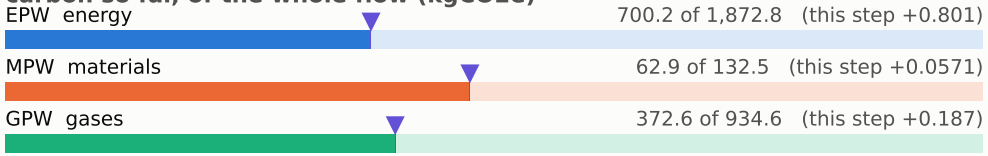

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

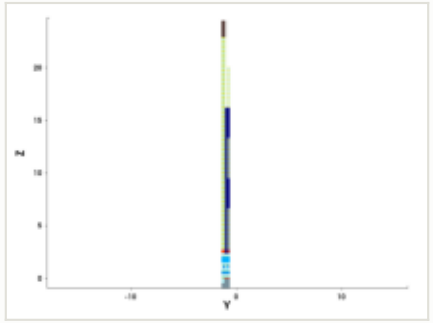

y cut at -1.035 µm

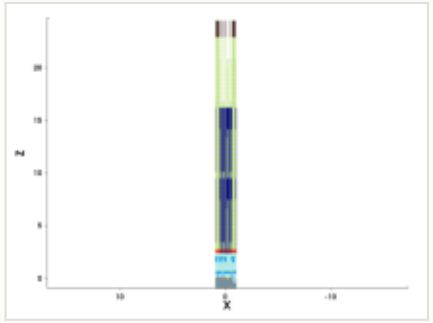

mask for this step

no mask for this step

steps by process area

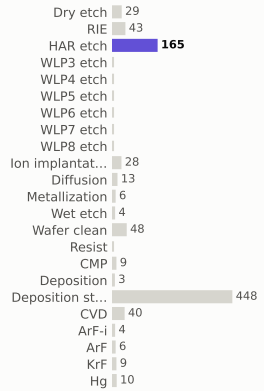

materials deposited (g)

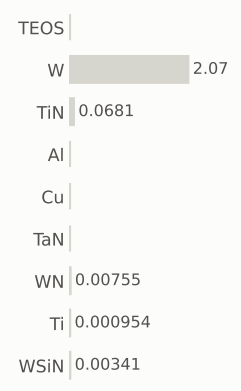

gases emitted (g)

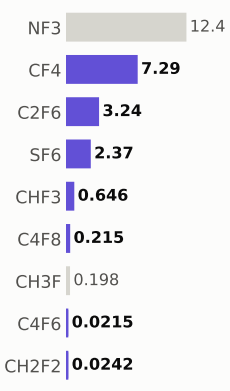

Step #11622.0805: HAR_etch

etch_noop · HAR_etch

1.04	1,136.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

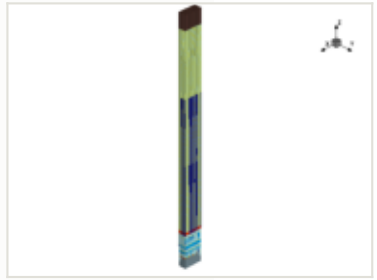

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

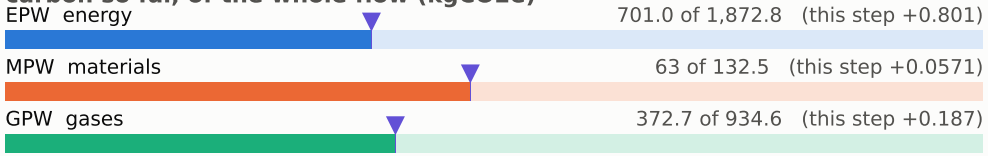

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

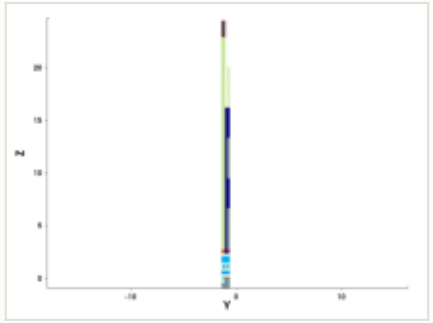

y cut at -1.035 µm

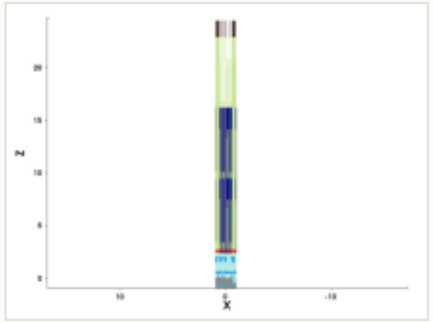

mask for this step

no mask for this step

steps by process area

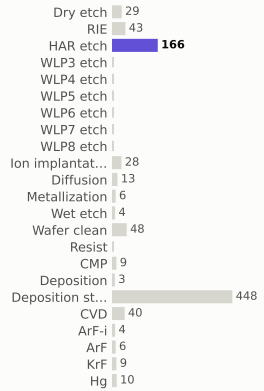

materials deposited (g)

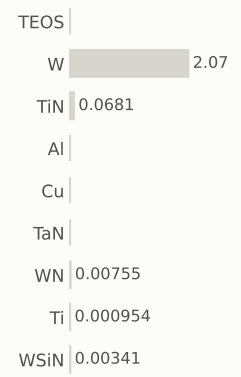

gases emitted (g)

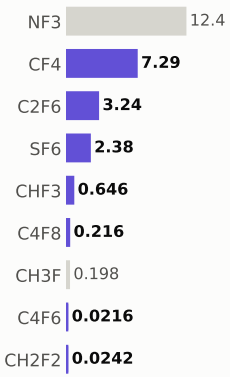

Step #11622.1477: HAR_etch

etch_noop · HAR_etch

1.04	1,137.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

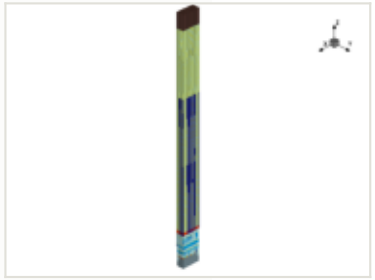

x cut at 0.000 µm

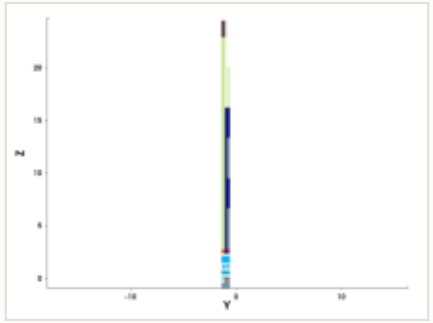

y cut at -1.035 µm

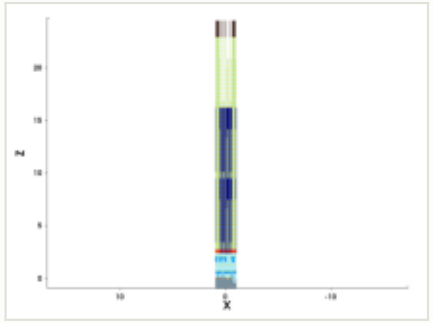

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

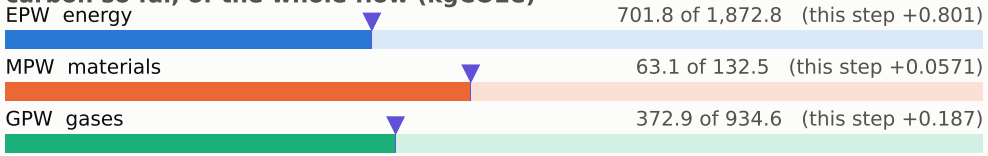

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

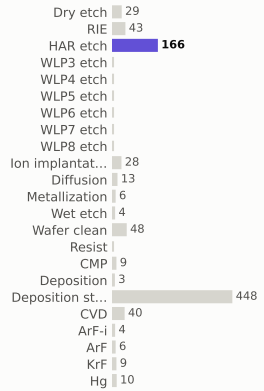

materials deposited (g)

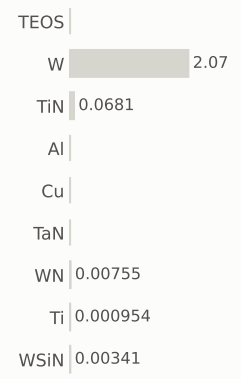

gases emitted (g)

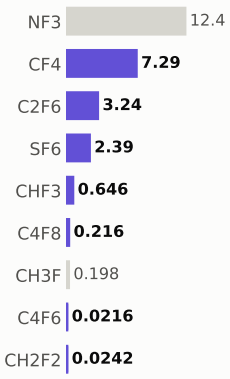

Step #11622.2148: HAR_etch

etch_noop · HAR_etch

1.04	1,138.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

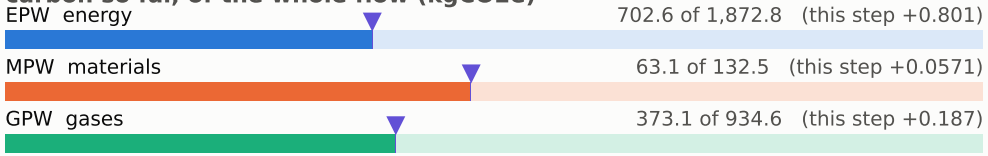

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

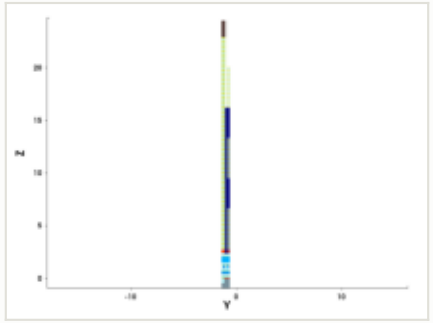

y cut at -1.035 µm

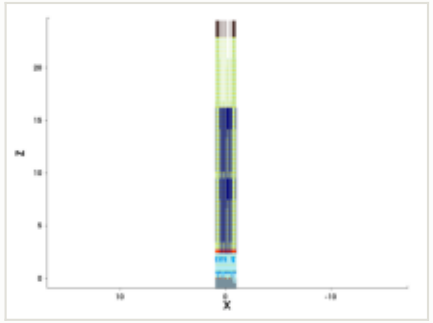

mask for this step

no mask for this step

steps by process area

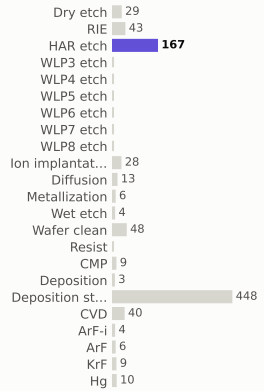

materials deposited (g)

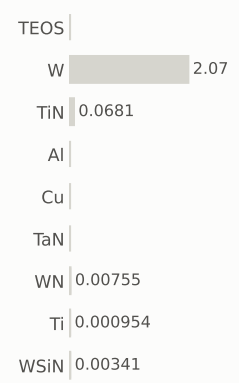

gases emitted (g)

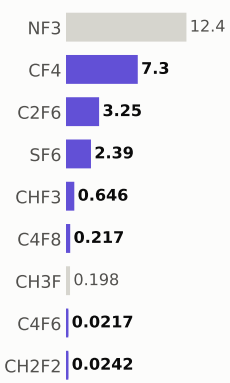

Step #11622.2819: HAR_etch

etch_noop · HAR_etch

1.04	1,139.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

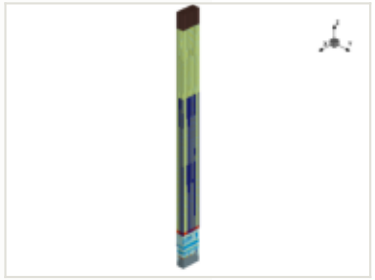

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

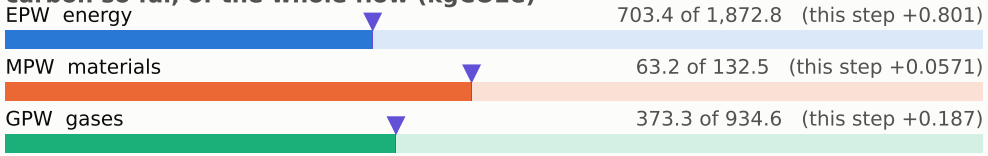

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

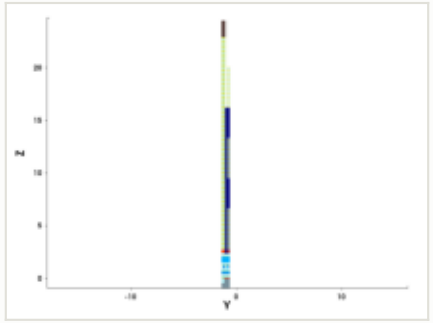

y cut at -1.035 µm

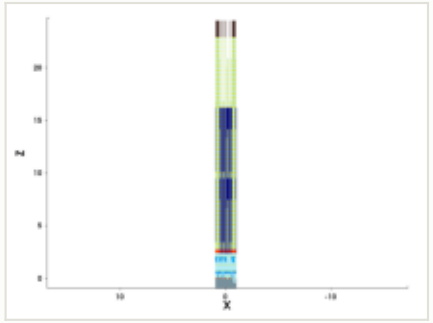

mask for this step

no mask for this step

steps by process area

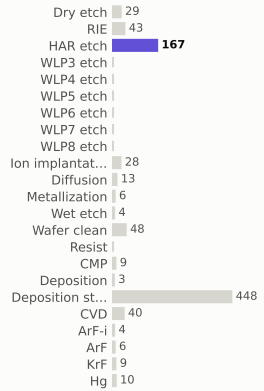

materials deposited (g)

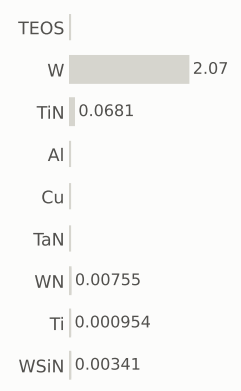

gases emitted (g)

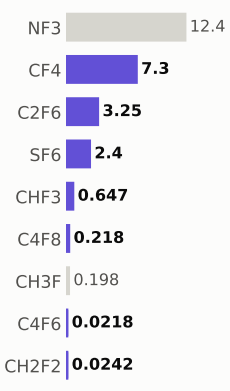

Step #11622.349: HAR_etch

etch_noop · HAR_etch

1.04	1,140.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

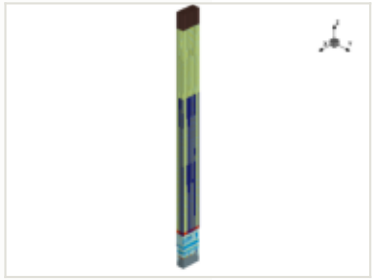

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

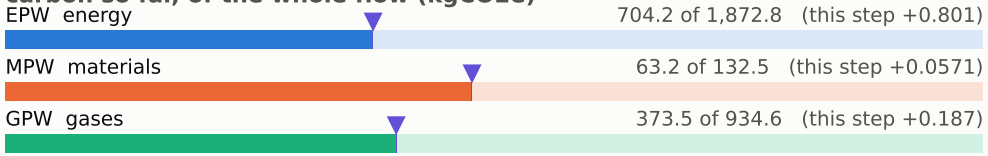

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

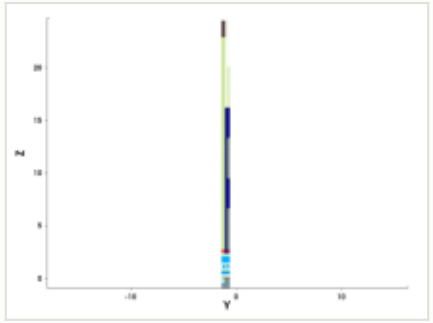

y cut at -1.035 µm

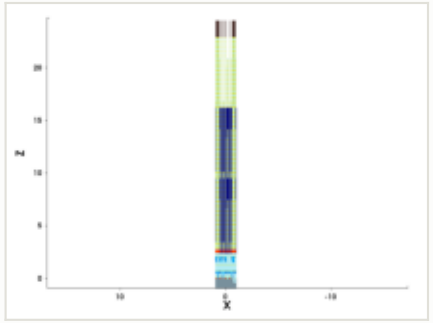

mask for this step

no mask for this step

steps by process area

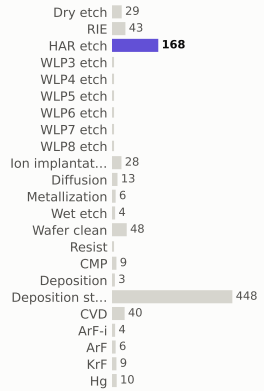

materials deposited (g)

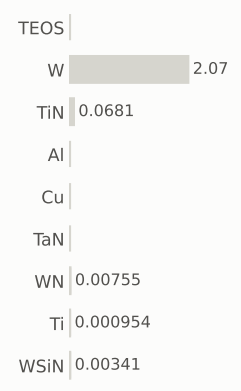

gases emitted (g)

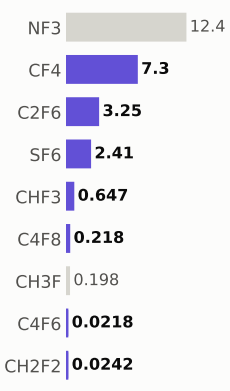

Step #11622.4161: HAR_etch

etch_noop · HAR_etch

1.04	1,142.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

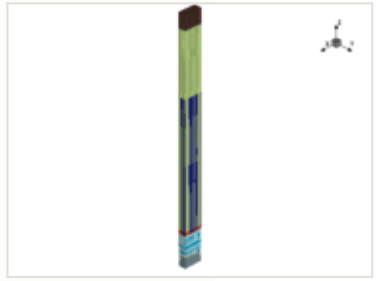

x cut at 0.000 µm

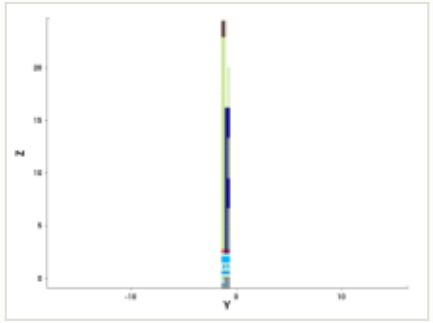

y cut at -1.035 µm

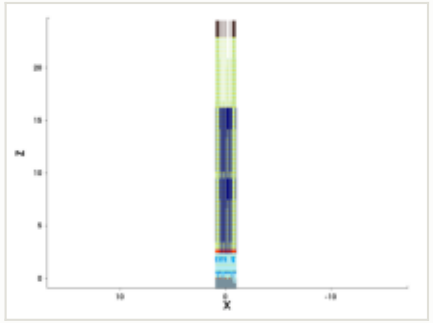

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

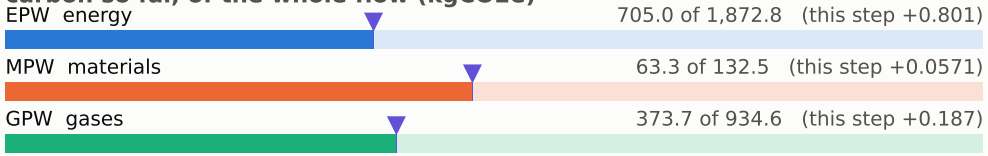

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

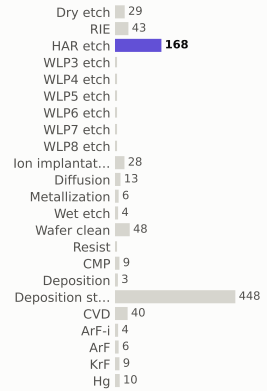

materials deposited (g)

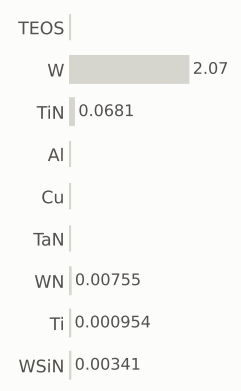

gases emitted (g)

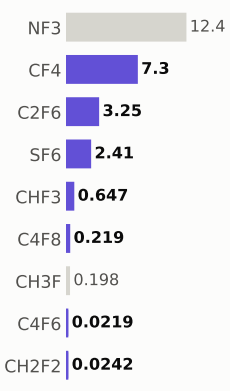

Step #11622.4832: HAR_etch

etch_noop · HAR_etch

1.04	1,143.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

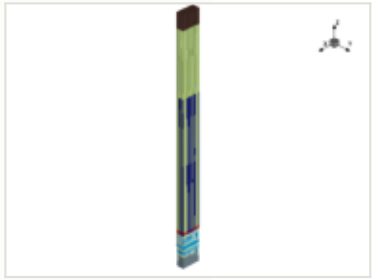

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

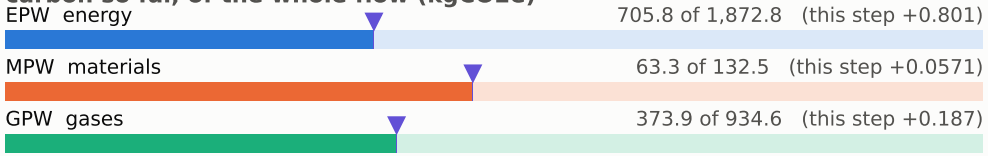

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

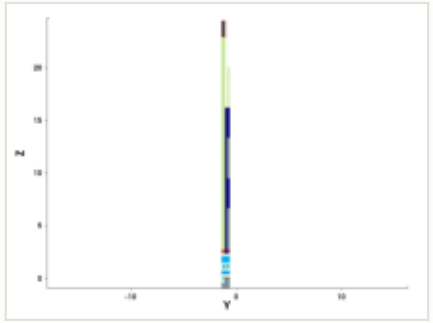

y cut at -1.035 µm

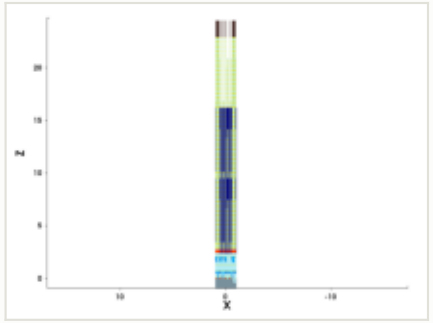

mask for this step

no mask for this step

steps by process area

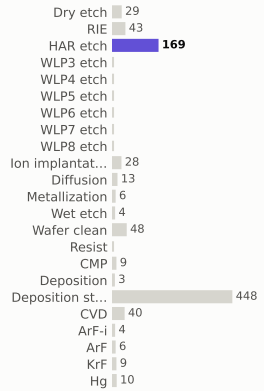

materials deposited (g)

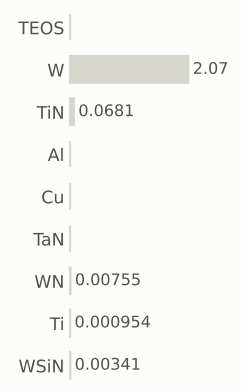

gases emitted (g)

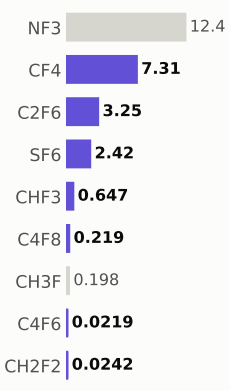

Step #11622.5503: HAR_etch

etch_noop · HAR_etch

1.04	1,144.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

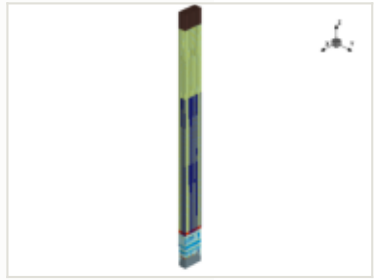

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

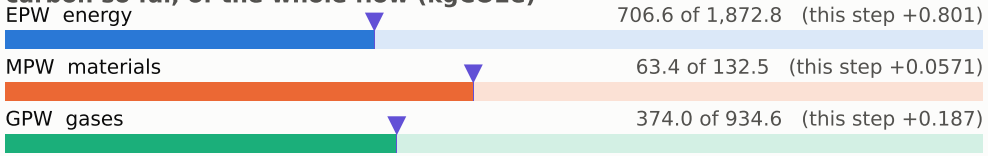

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

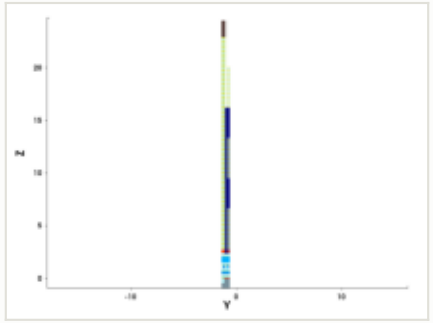

y cut at -1.035 µm

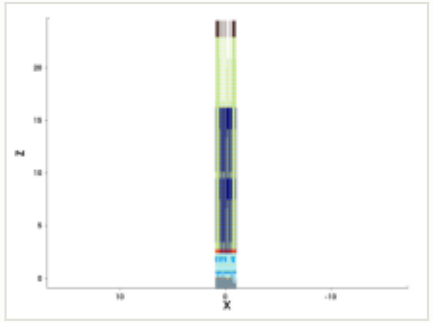

mask for this step

no mask for this step

steps by process area

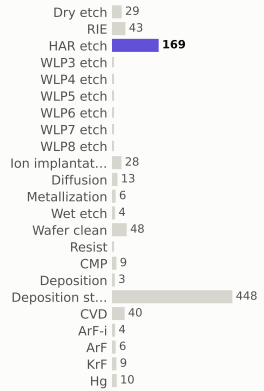

materials deposited (g)

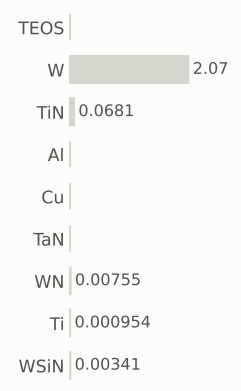

gases emitted (g)

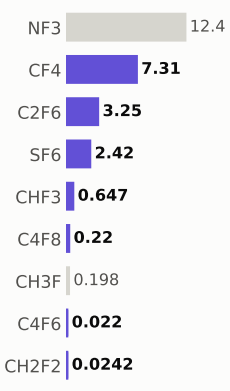

Step #11622.6174: HAR_etch

etch_noop · HAR_etch

1.04	1,145.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

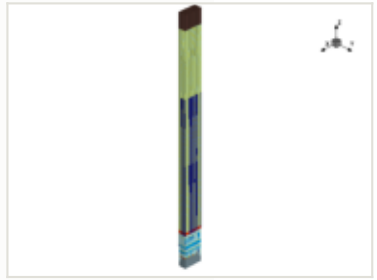

x cut at 0.000 µm

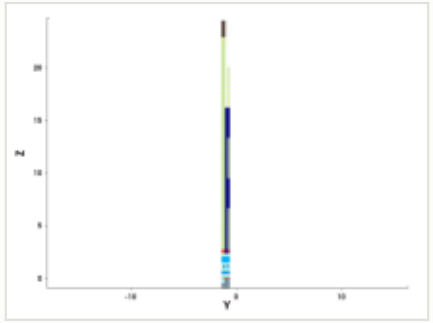

y cut at -1.035 µm

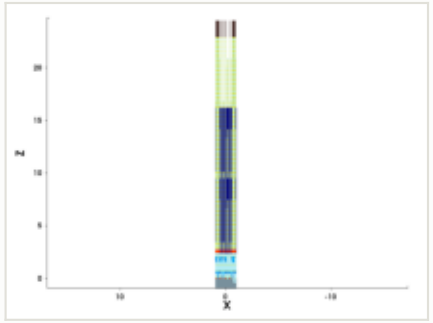

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

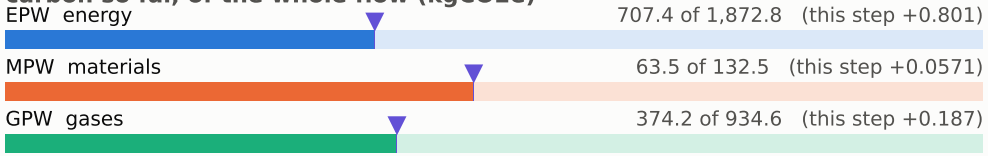

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

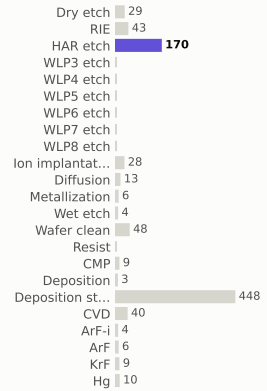

materials deposited (g)

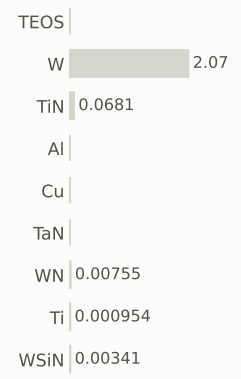

gases emitted (g)

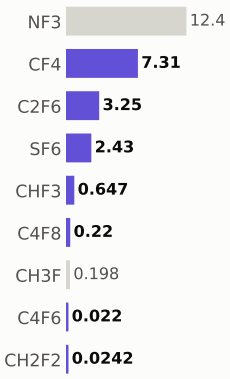

Step #11622.6846: HAR_etch

etch_noop · HAR_etch

1.04	1,146.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

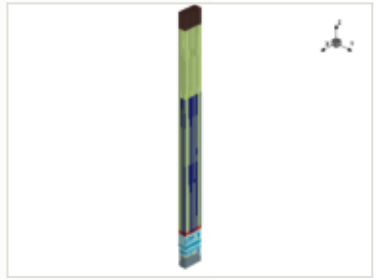

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

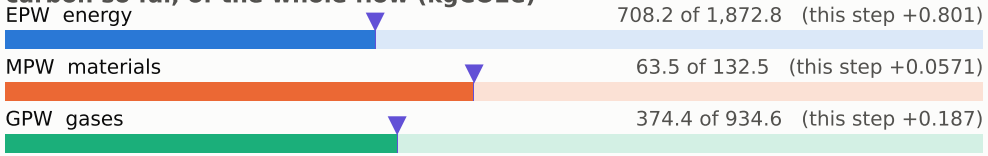

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

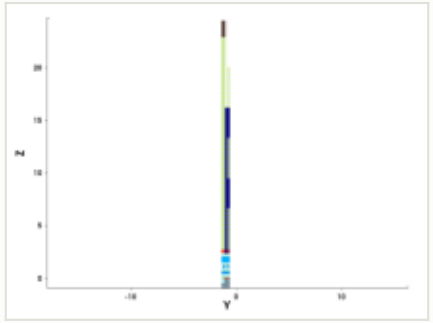

y cut at -1.035 µm

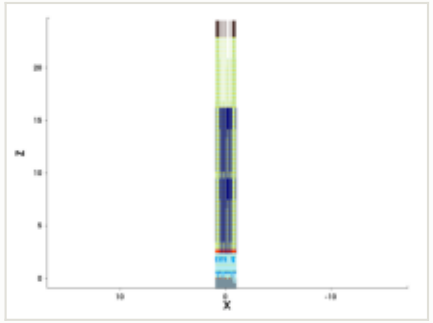

mask for this step

no mask for this step

steps by process area

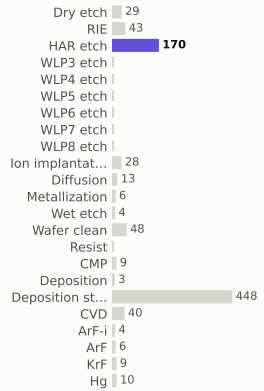

materials deposited (g)

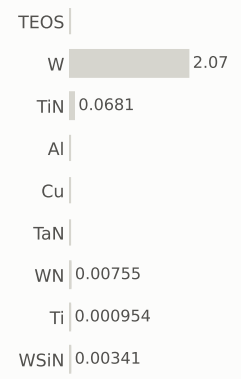

gases emitted (g)

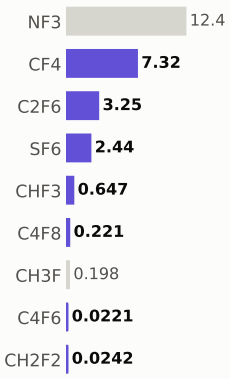

Step #11622.7517: HAR_etch

etch_noop · HAR_etch

1.04	1,147.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

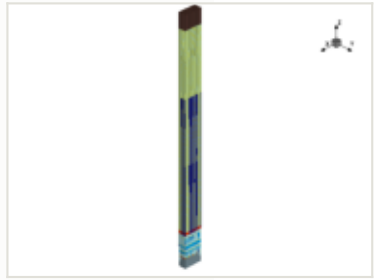

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

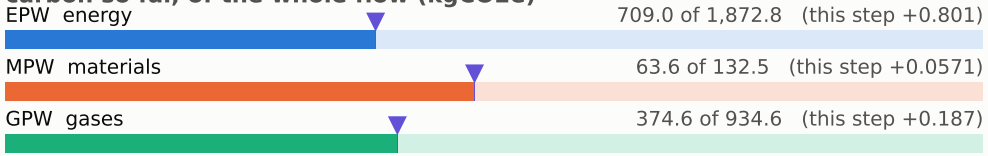

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

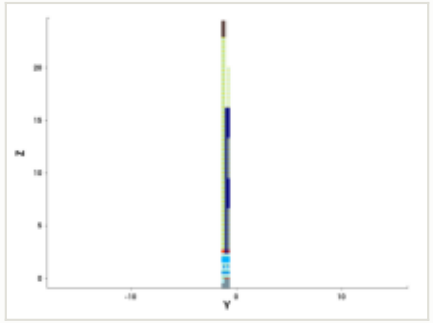

y cut at -1.035 µm

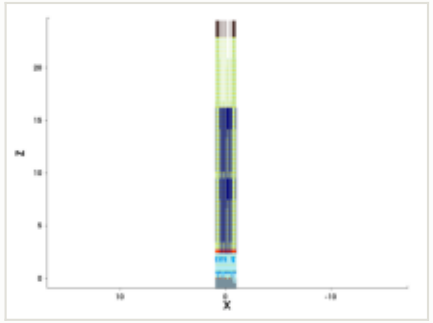

mask for this step

no mask for this step

steps by process area

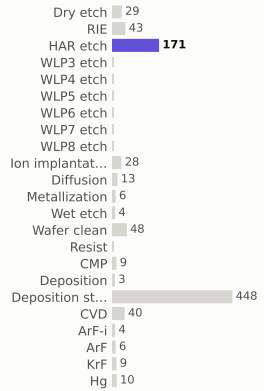

materials deposited (g)

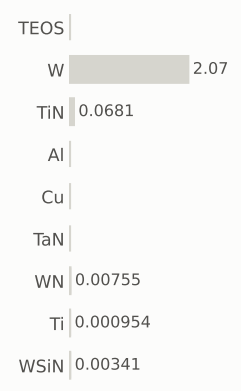

gases emitted (g)

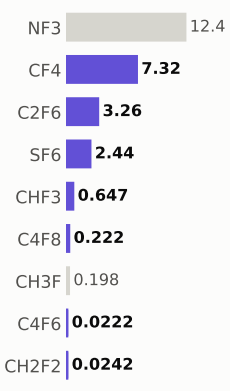

Step #11622.8188: HAR_etch

etch_noop · HAR_etch

1.04	1,148.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

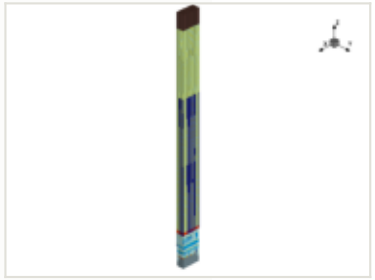

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

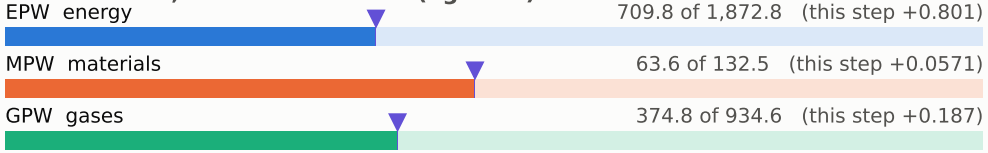

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

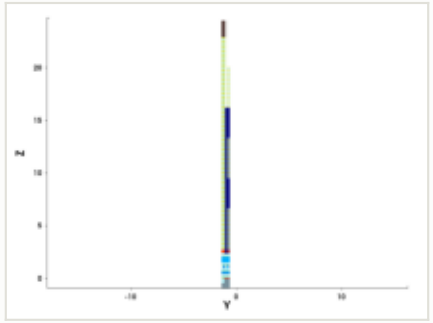

y cut at -1.035 µm

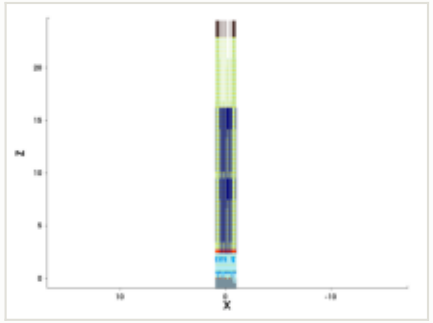

mask for this step

no mask for this step

steps by process area

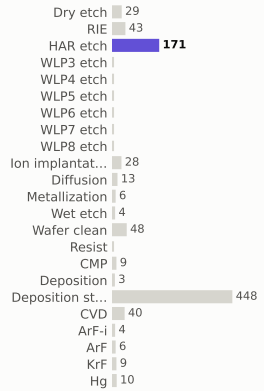

materials deposited (g)

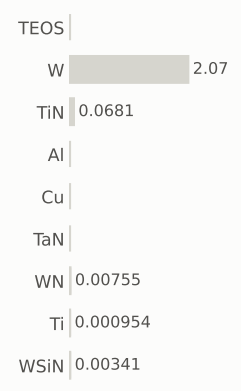

gases emitted (g)

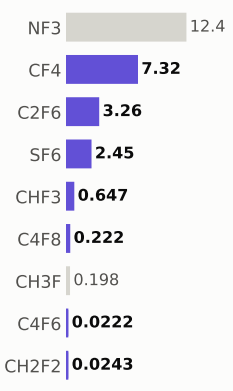

Step #11622.8859: HAR_etch

etch_noop · HAR_etch

1.04	1,149.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

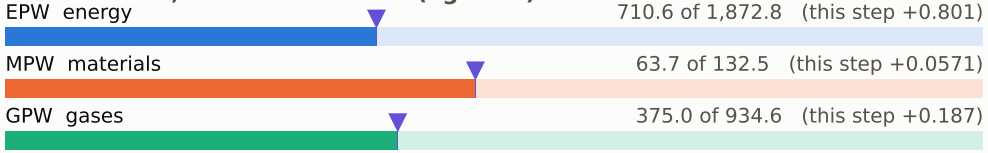

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

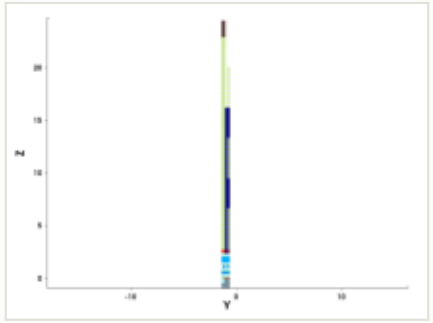

y cut at -1.035 µm

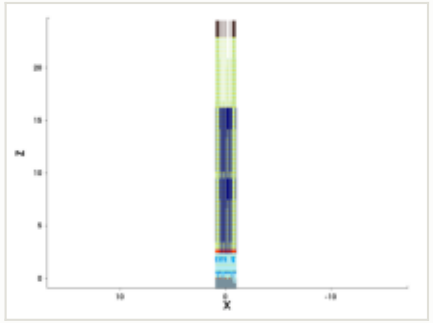

mask for this step

no mask for this step

steps by process area

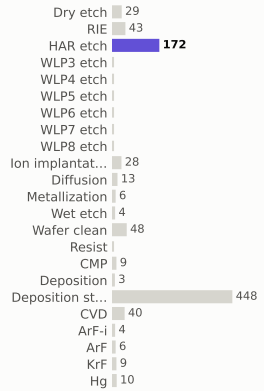

materials deposited (g)

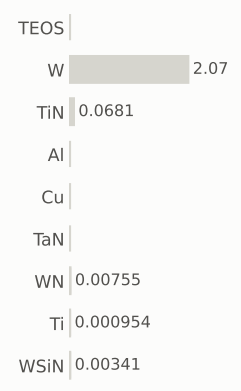

gases emitted (g)

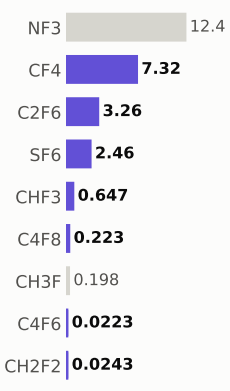

Step #11622.953: HAR_etch

etch_noop · HAR_etch

1.04	1,150.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

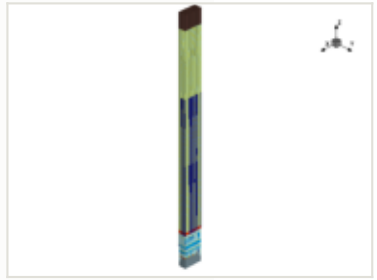

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

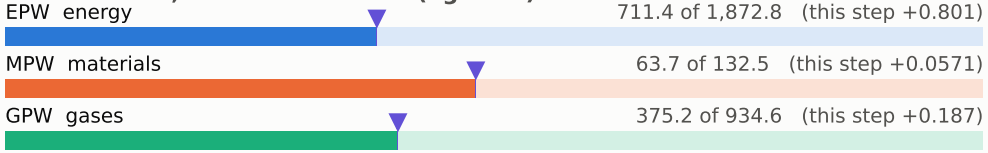

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

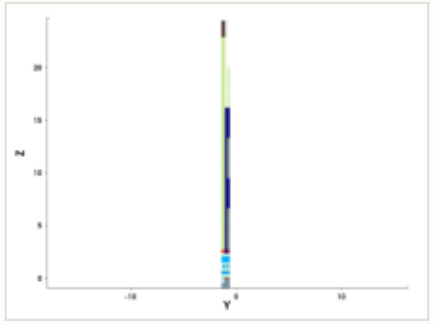

y cut at -1.035 µm

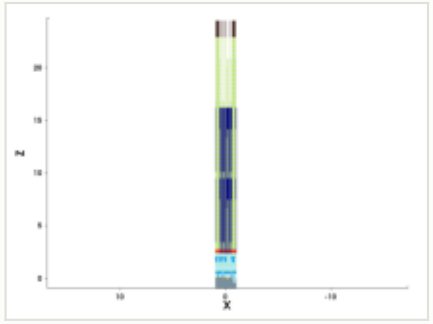

mask for this step

no mask for this step

steps by process area

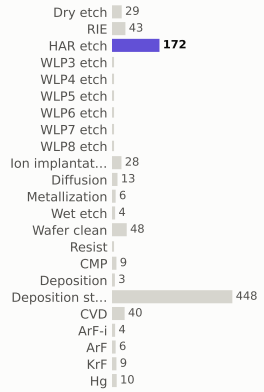

materials deposited (g)

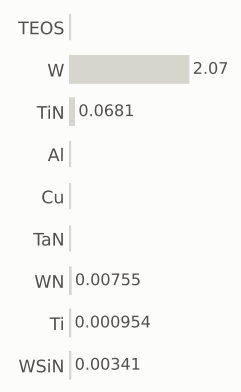

gases emitted (g)



Step #11623.0201: HAR_etch

etch_noop · HAR_etch

1.04	1,151.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

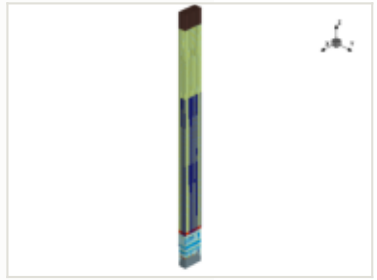

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

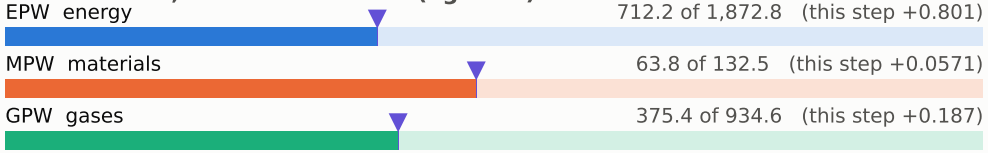

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

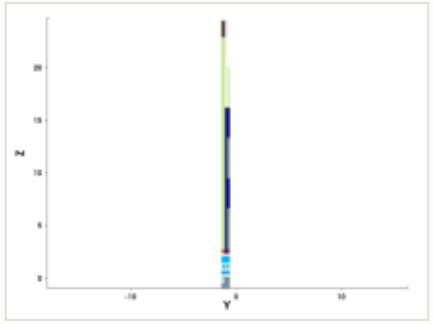

y cut at -1.035 µm

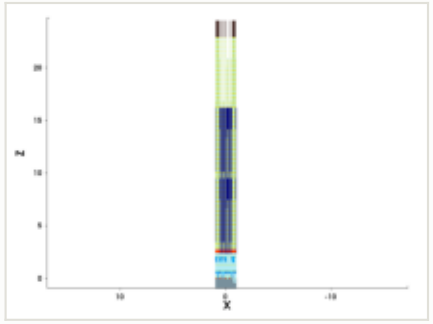

mask for this step

no mask for this step

steps by process area

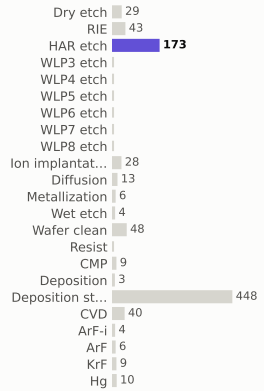

materials deposited (g)

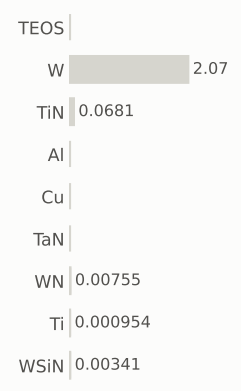

gases emitted (g)

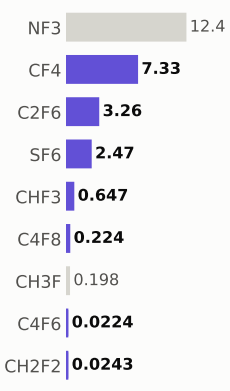

Step #11623.0872: HAR_etch

etch_noop · HAR_etch

1.04	1,152.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

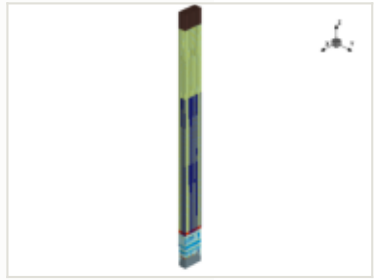

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

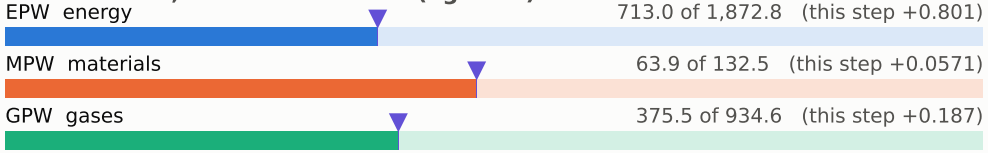

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

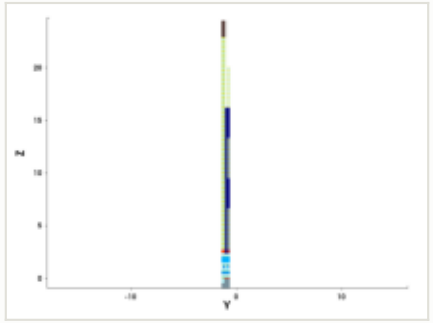

y cut at -1.035 µm

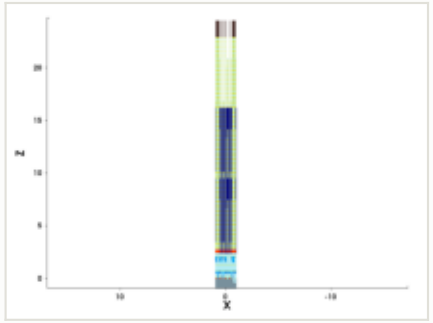

mask for this step

no mask for this step

steps by process area

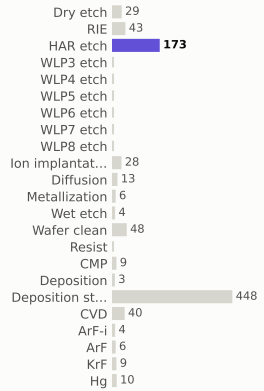

materials deposited (g)

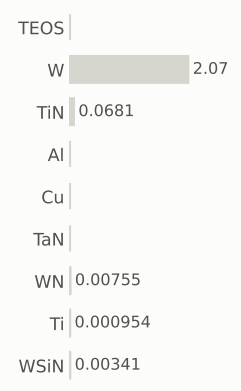

gases emitted (g)

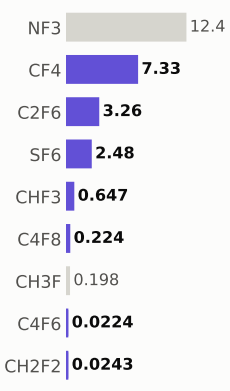

Step #11623.1544: HAR_etch

etch_noop · HAR_etch

1.04	1,153.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

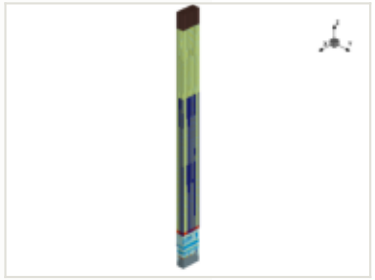

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

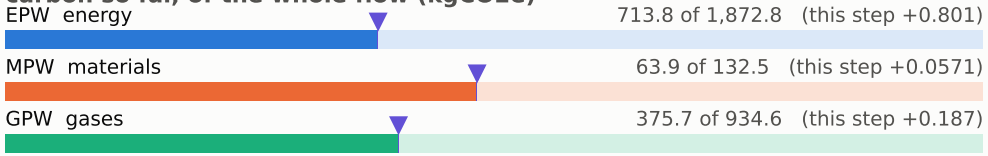

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

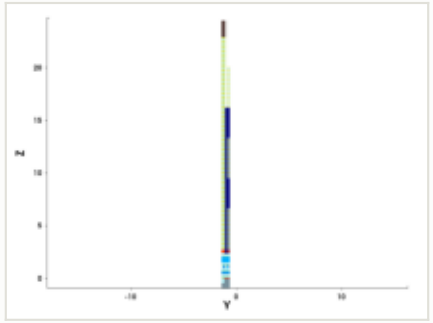

y cut at -1.035 µm

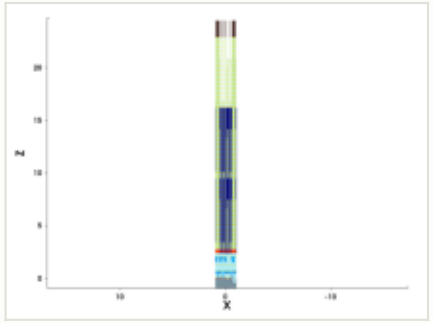

mask for this step

no mask for this step

steps by process area

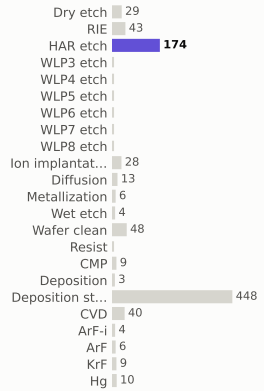

materials deposited (g)

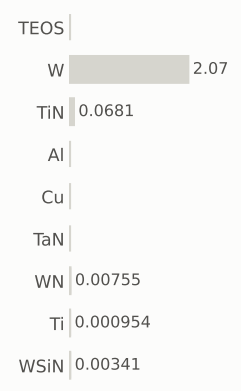

gases emitted (g)

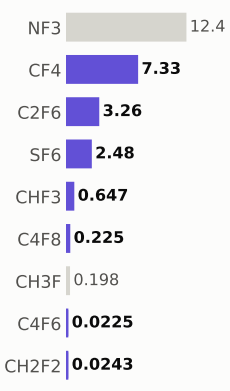

Step #11623.2215: HAR_etch

etch_noop · HAR_etch

1.04	1,154.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

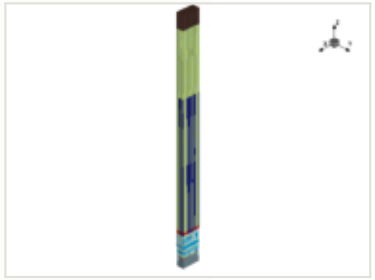

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

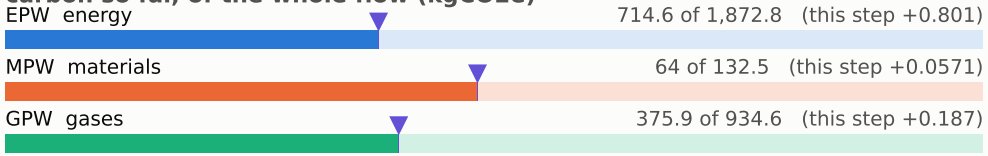

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

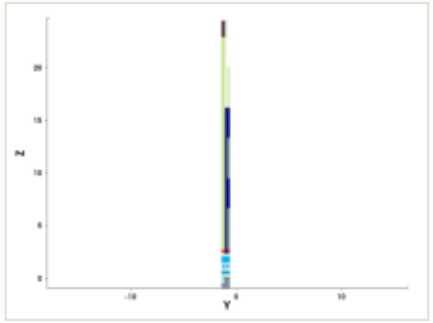

y cut at -1.035 µm

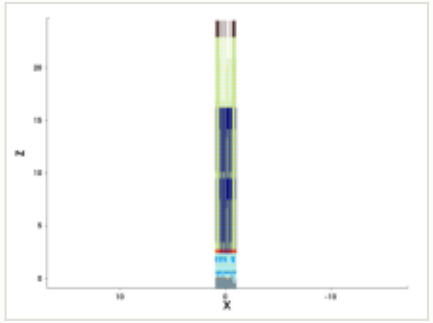

mask for this step

no mask for this step

steps by process area

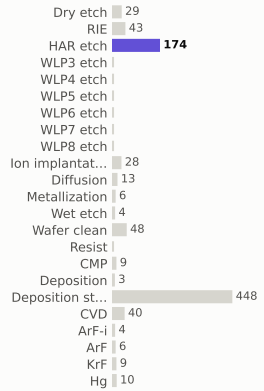

materials deposited (g)

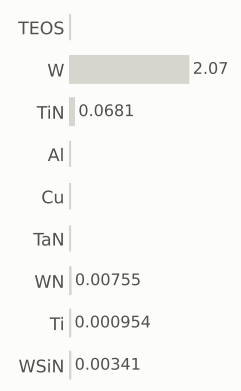

gases emitted (g)

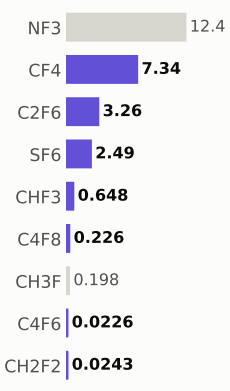

Step #11623.2886: HAR_etch

etch_noop · HAR_etch

1.04	1,155.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

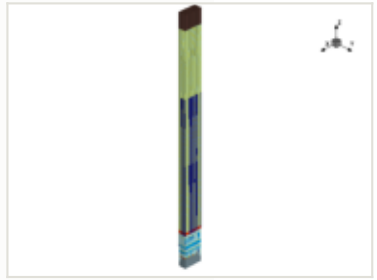

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

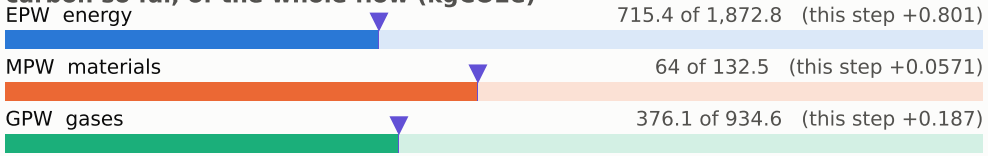

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

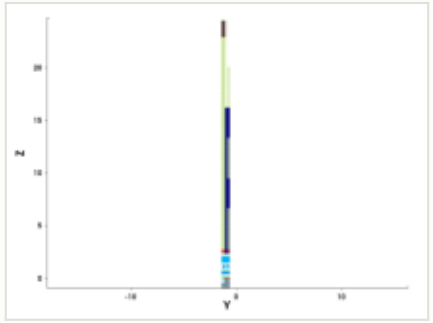

y cut at -1.035 µm

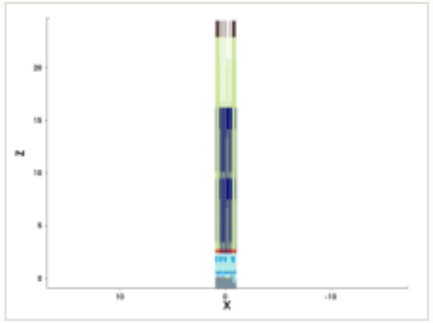

mask for this step

no mask for this step

steps by process area

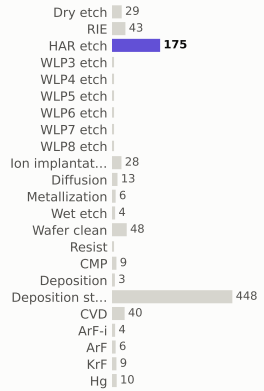

materials deposited (g)

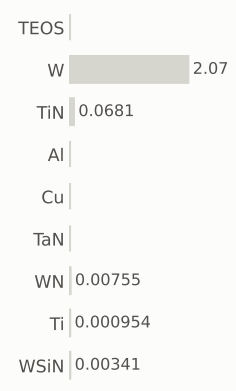

gases emitted (g)

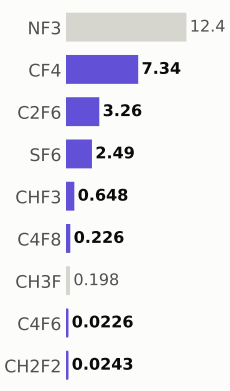

Step #11623.3557: HAR_etch

etch_noop · HAR_etch

1.04	1,156.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

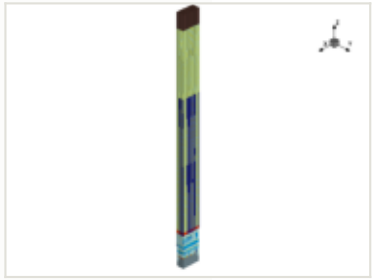

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

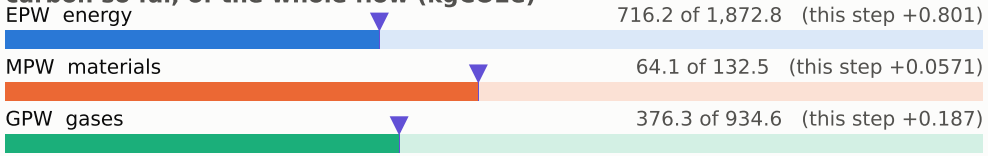

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

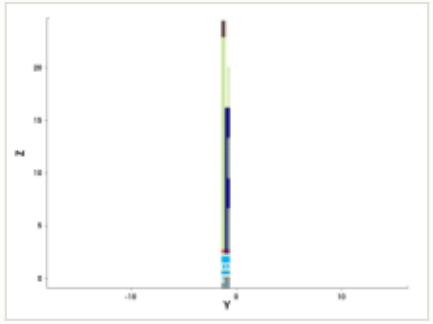

y cut at -1.035 µm

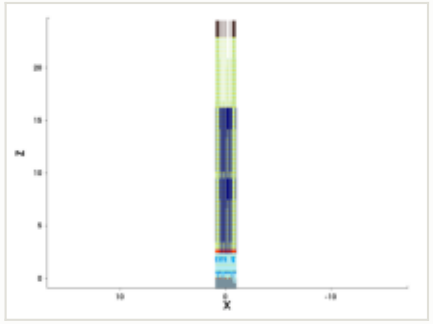

mask for this step

no mask for this step

steps by process area

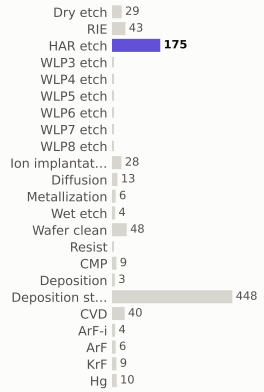

materials deposited (g)

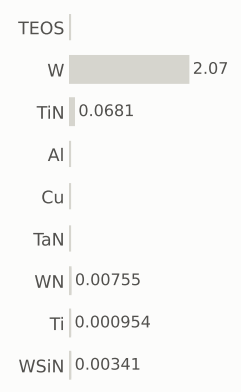

gases emitted (g)

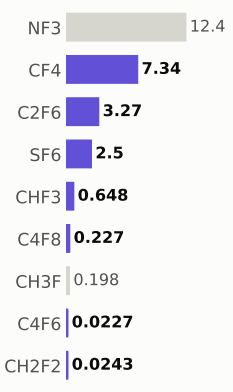

Step #11623.4228: HAR_etch

etch_noop · HAR_etch

1.04	1,157.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

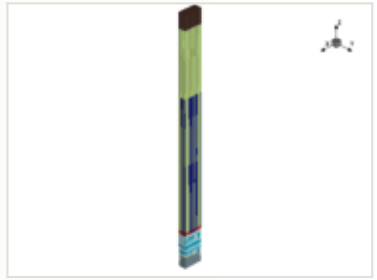

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

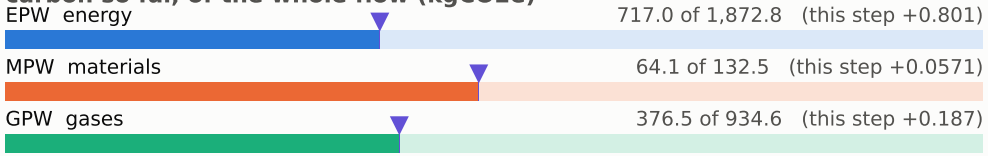

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

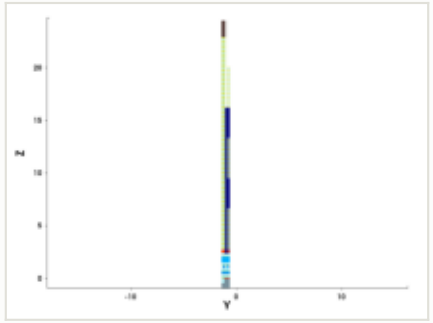

y cut at -1.035 µm

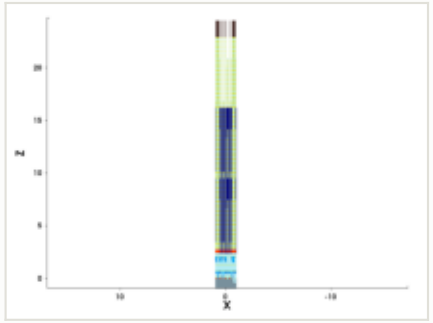

mask for this step

no mask for this step

steps by process area

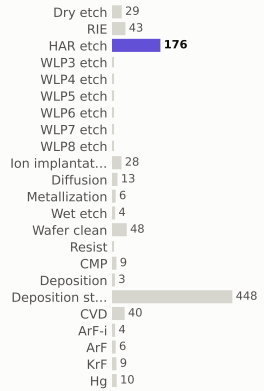

materials deposited (g)

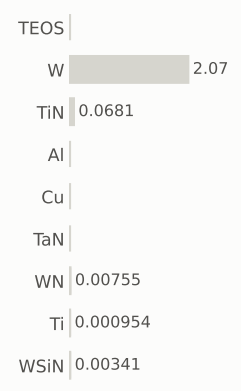

gases emitted (g)

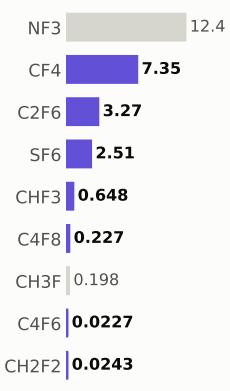

Step #11623.4899: HAR_etch

etch_noop · HAR_etch

1.04	1,158.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

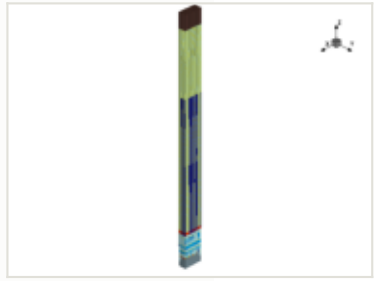

x cut at 0.000 µm

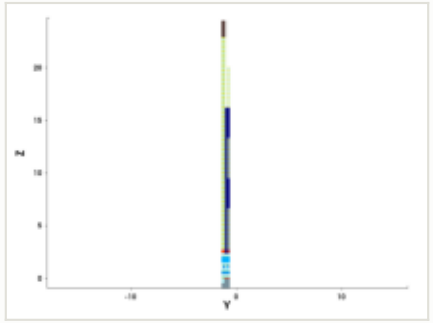

y cut at -1.035 µm

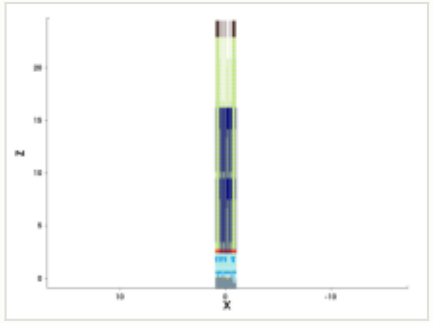

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

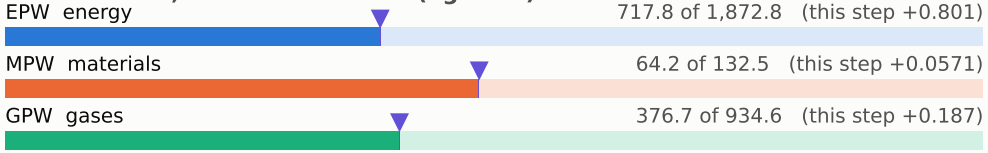

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

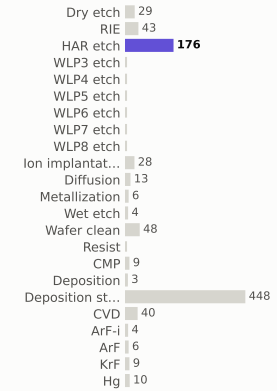

materials deposited (g)

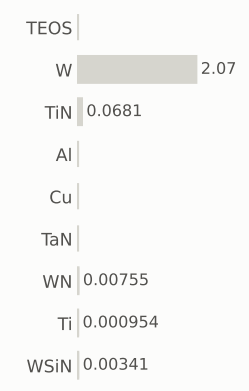

gases emitted (g)

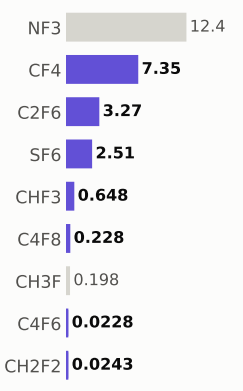

Step #11623.557: HAR_etch

etch_noop · HAR_etch

1.04	1,159.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

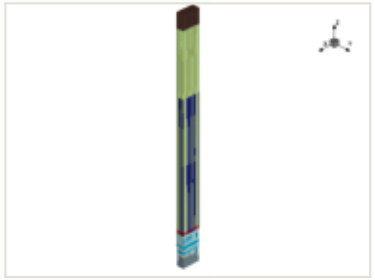

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

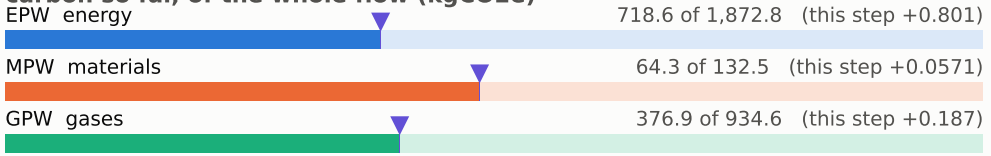

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

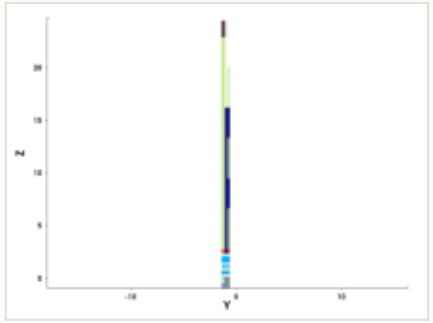

y cut at -1.035 µm

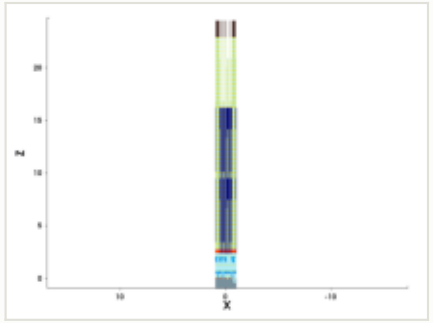

mask for this step

no mask for this step

steps by process area

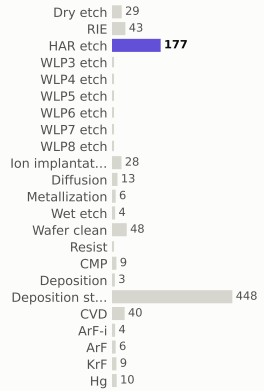

materials deposited (g)

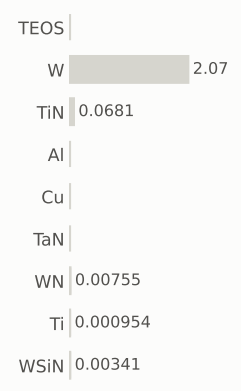

gases emitted (g)

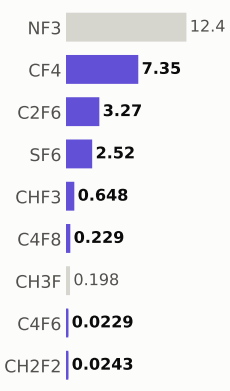

Step #11623.6242: HAR_etch

etch_noop · HAR_etch

1.04	1,160.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

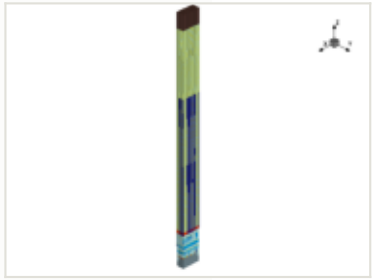

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

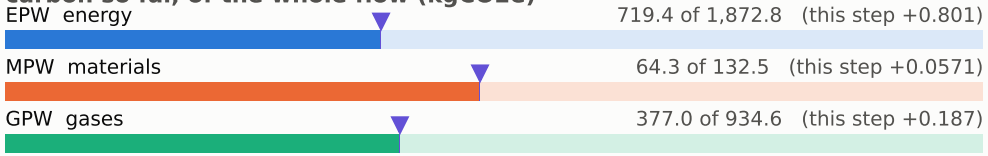

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

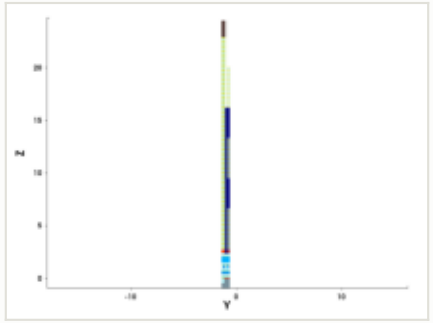

y cut at -1.035 µm

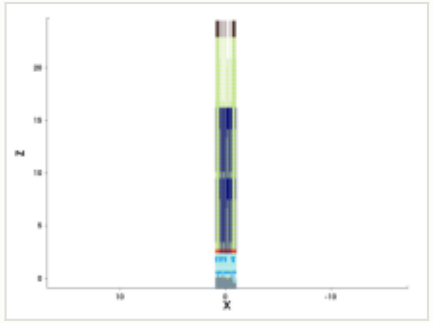

mask for this step

no mask for this step

steps by process area

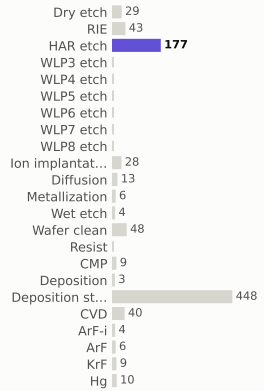

materials deposited (g)

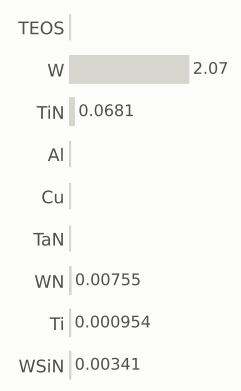

gases emitted (g)

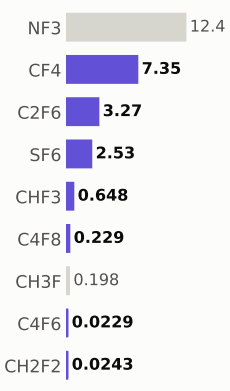

Step #11623.6913: HAR_etch

etch_noop · HAR_etch

1.04	1,161.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

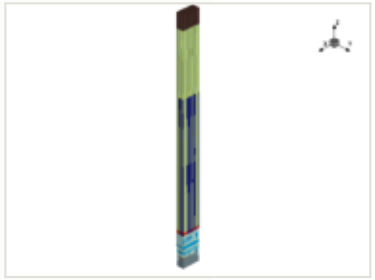

x cut at 0.000 µm

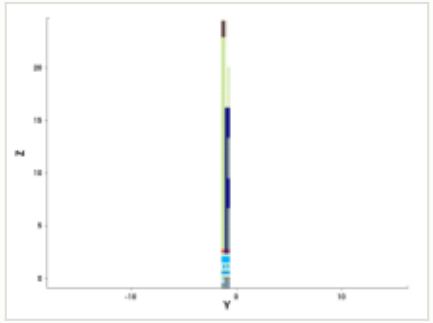

y cut at -1.035 µm

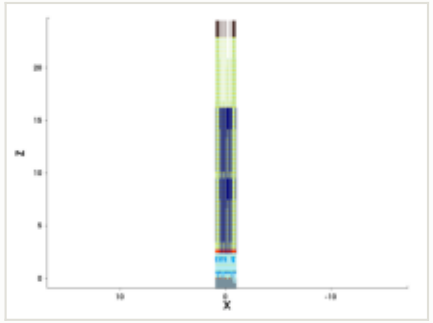

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

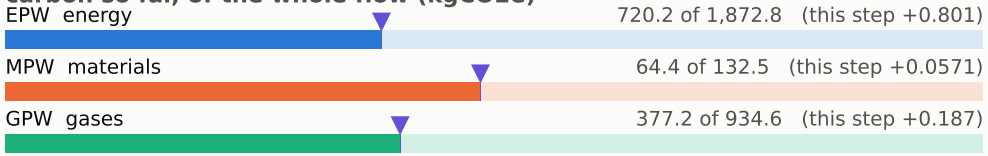

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

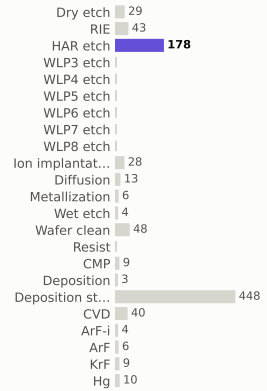

materials deposited (g)

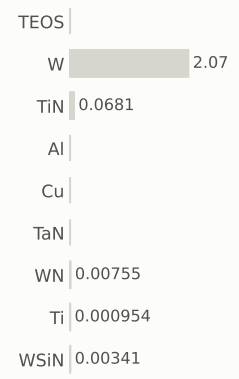

gases emitted (g)

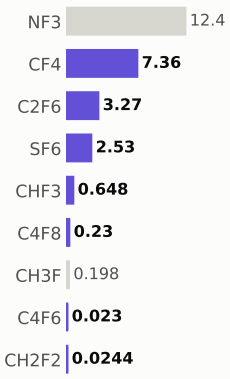

Step #11623.7584: HAR_etch

etch_noop · HAR_etch

1.04	1,162.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

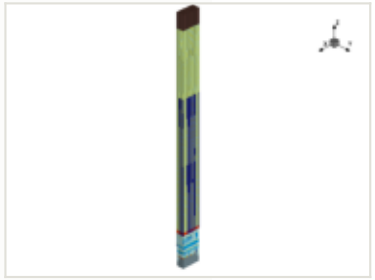

x cut at 0.000 µm

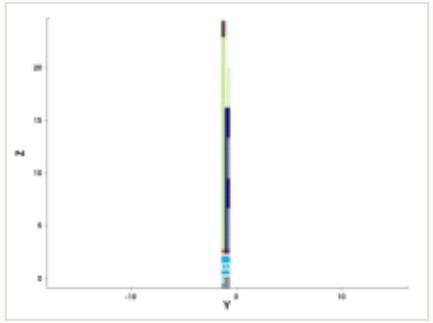

y cut at -1.035 µm

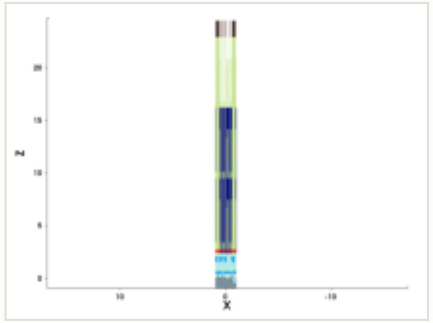

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

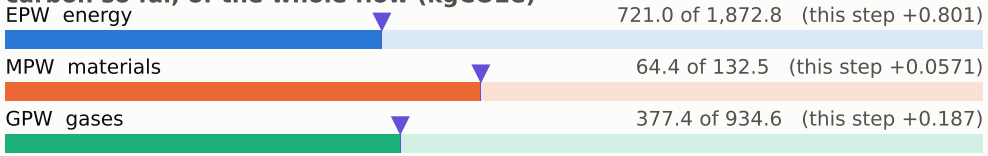

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

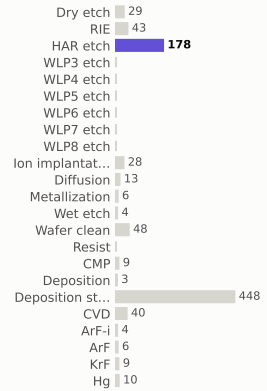

materials deposited (g)

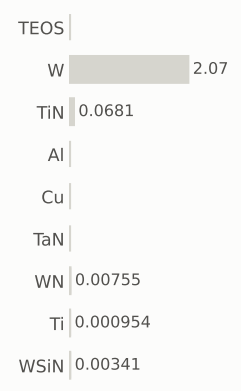

gases emitted (g)

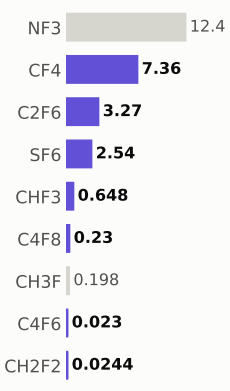

Step #11623.8255: HAR_etch

etch_noop · HAR_etch

1.04	1,163.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

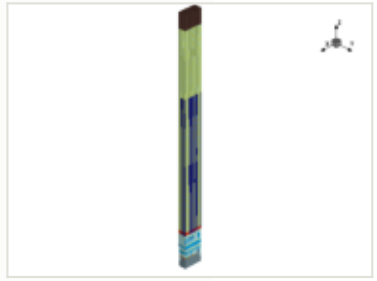

x cut at 0.000 µm

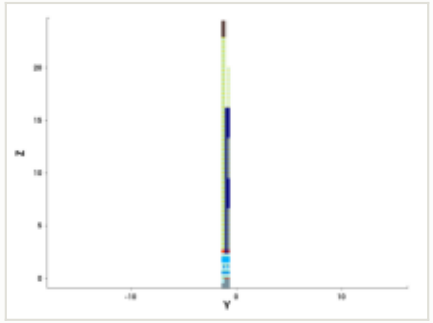

y cut at -1.035 µm

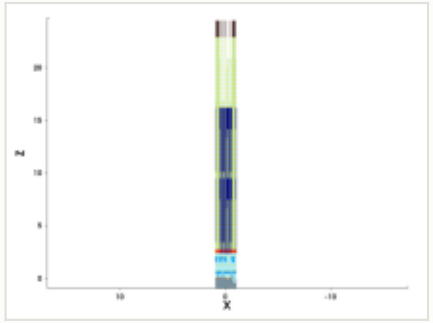

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

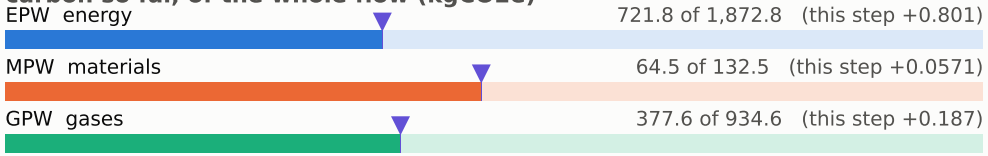

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

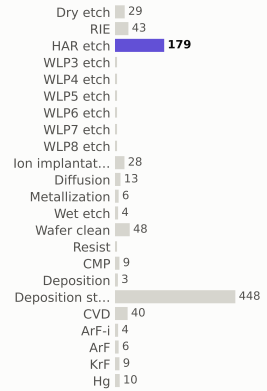

materials deposited (g)

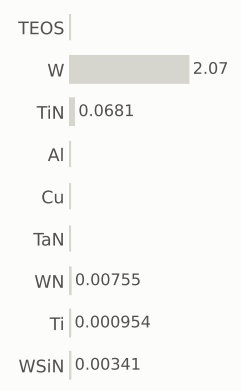

gases emitted (g)

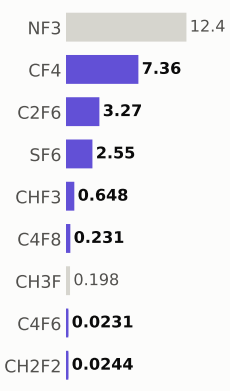

Step #11623.8926: HAR_etch

etch_noop · HAR_etch

1.04	1,165.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

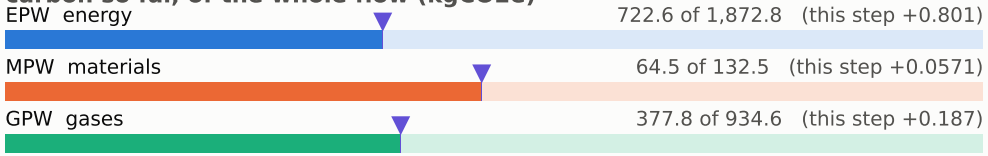

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

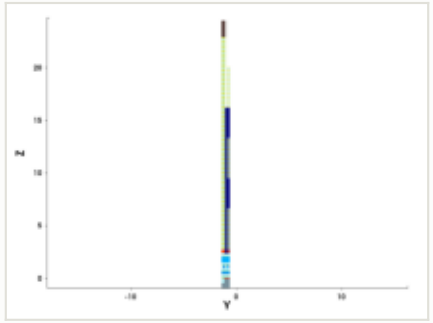

y cut at -1.035 µm

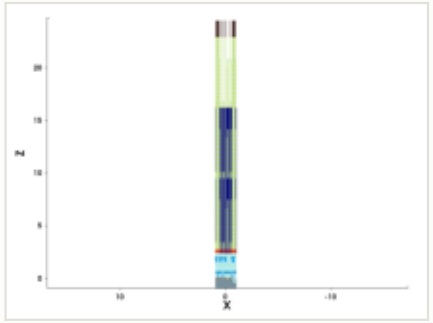

mask for this step

no mask for this step

steps by process area

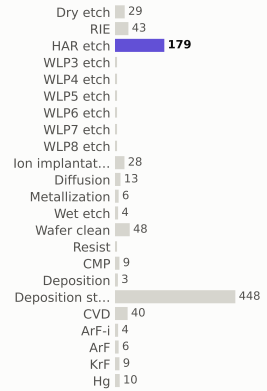

materials deposited (g)

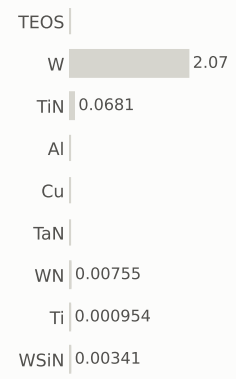

gases emitted (g)

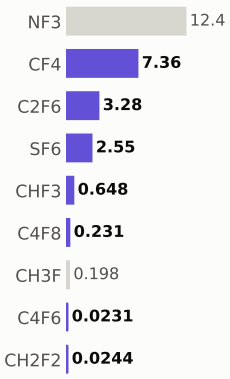

Step #11623.9597: HAR_etch

etch_noop · HAR_etch

1.04	1,166.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

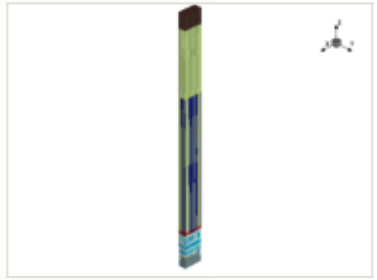

x cut at 0.000 µm

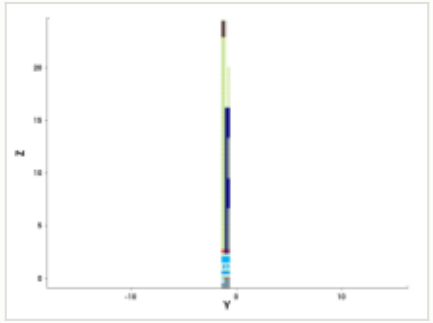

y cut at -1.035 µm

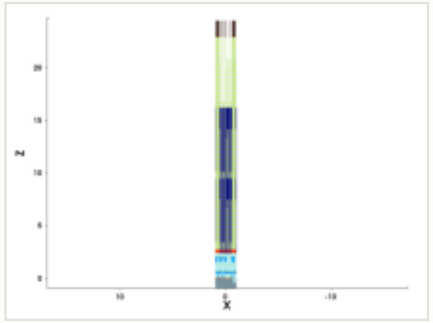

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

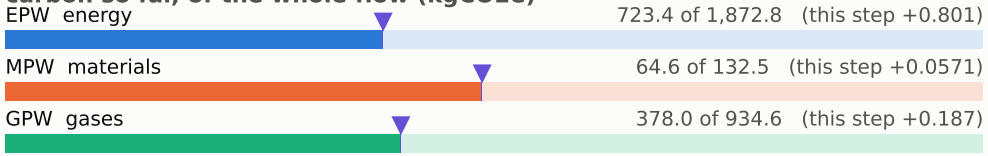

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

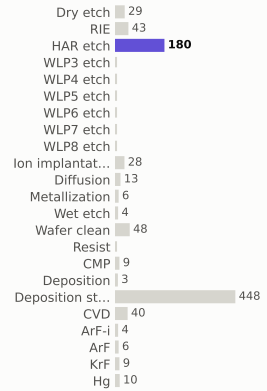

materials deposited (g)

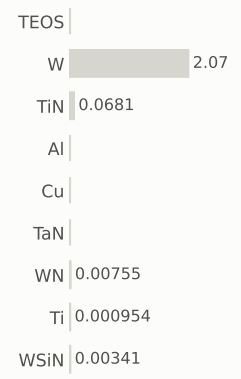

gases emitted (g)

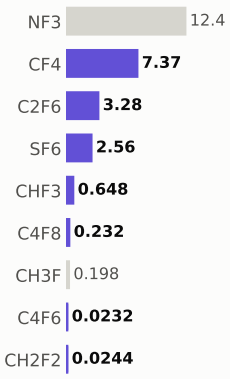

Step #11624.0268: HAR_etch

etch_noop · HAR_etch

1.04	1,167.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

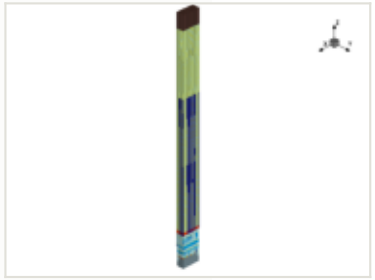

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

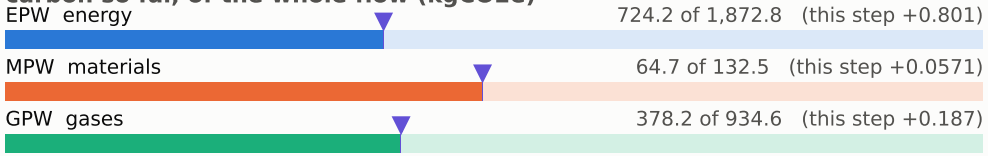

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

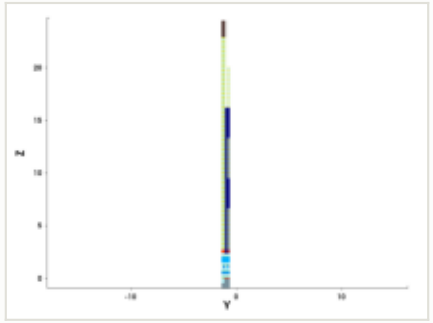

y cut at -1.035 µm

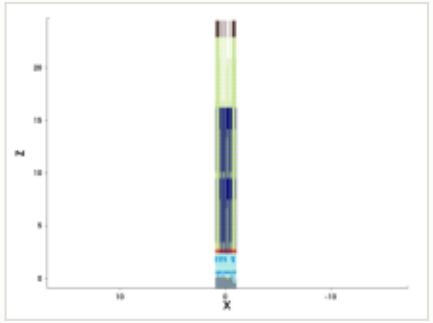

mask for this step

no mask for this step

steps by process area

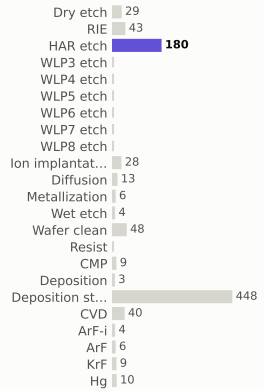

materials deposited (g)

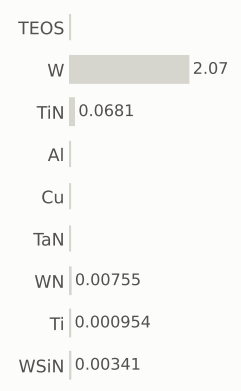

gases emitted (g)

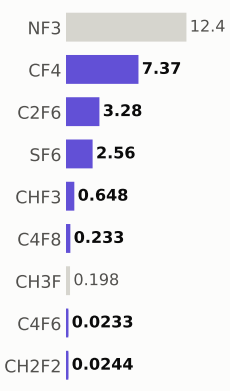

Step #11624.094: HAR_etch

etch_noop · HAR_etch

1.04	1,168.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

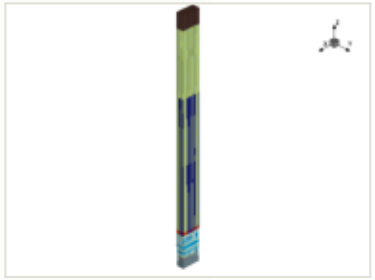

x cut at 0.000 µm

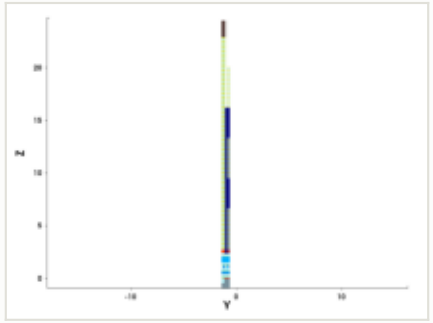

y cut at -1.035 µm

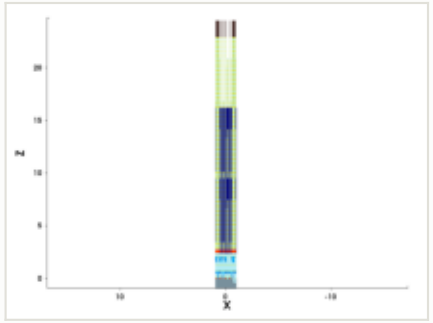

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

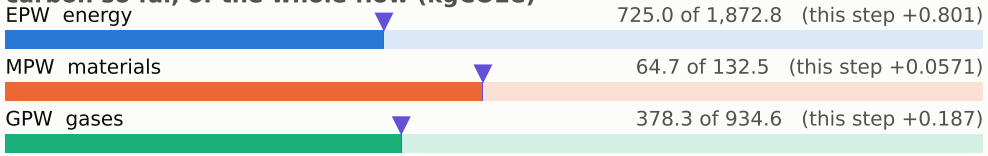

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

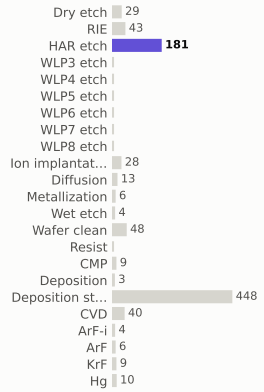

materials deposited (g)

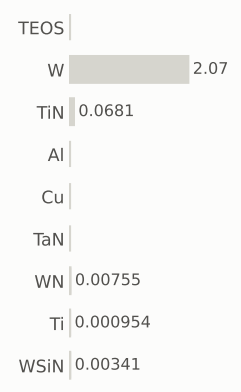

gases emitted (g)



Step #11624.1611: HAR_etch

etch_noop · HAR_etch

1.04	1,169.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

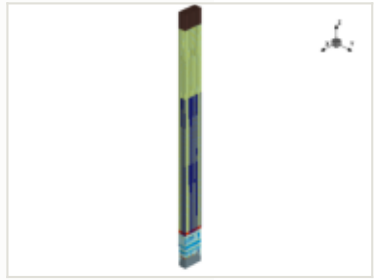

x cut at 0.000 µm

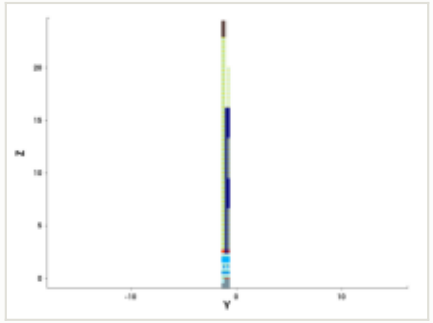

y cut at -1.035 µm

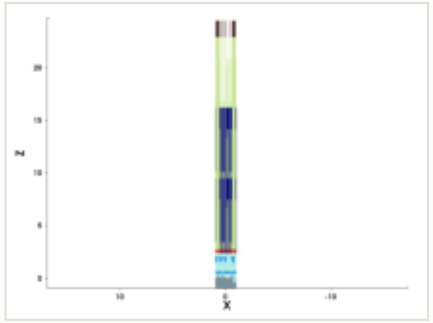

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

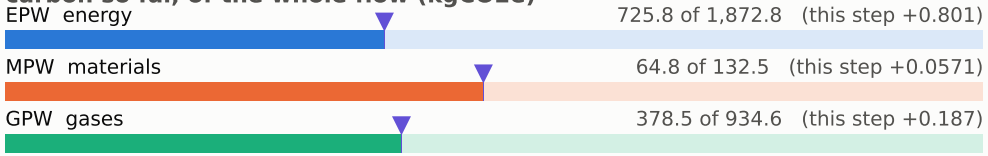

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

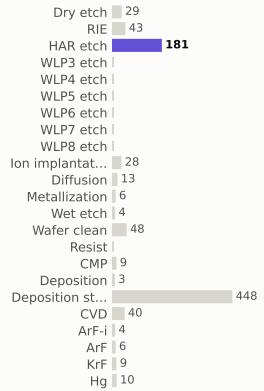

materials deposited (g)

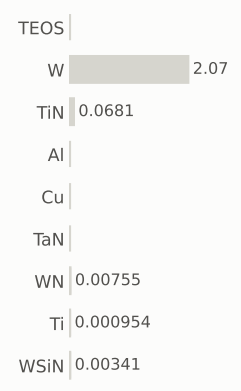

gases emitted (g)

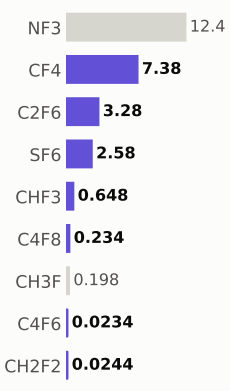

Step #11624.2282: HAR_etch

etch_noop · HAR_etch

1.04	1,170.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

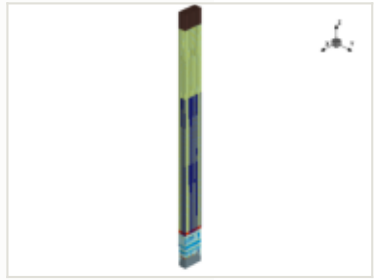

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

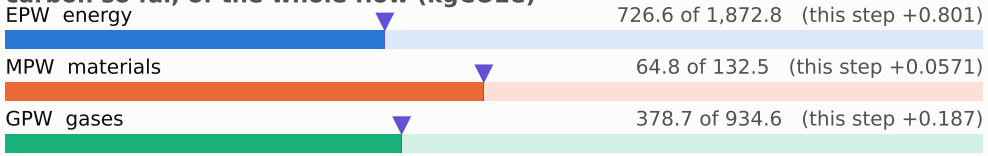

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

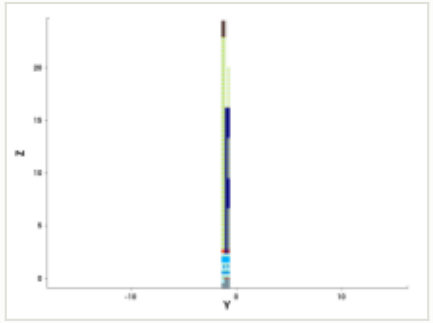

y cut at -1.035 µm

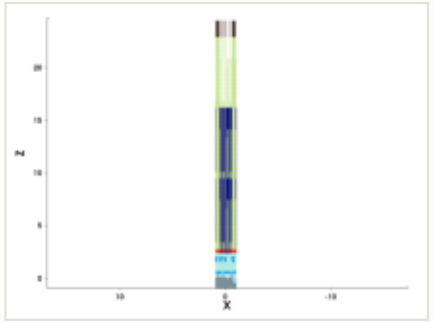

mask for this step

no mask for this step

steps by process area

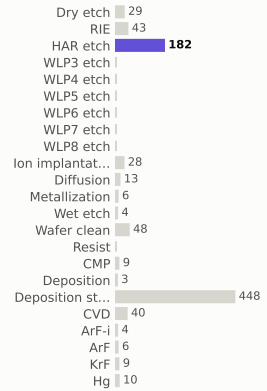

materials deposited (g)

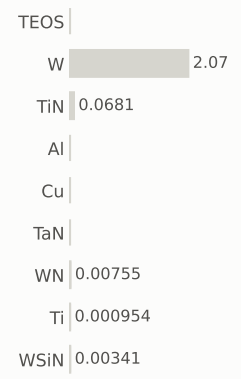

gases emitted (g)

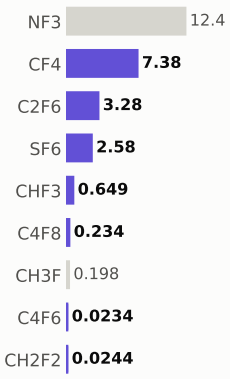

Step #11624.2953: HAR_etch

etch_noop · HAR_etch

1.04	1,171.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

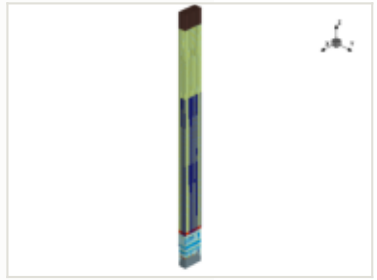

x cut at 0.000 µm

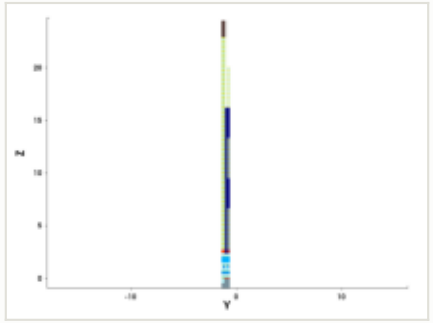

y cut at -1.035 µm

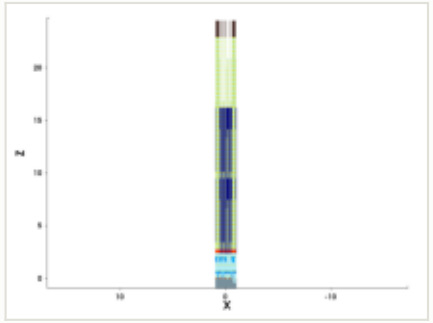

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

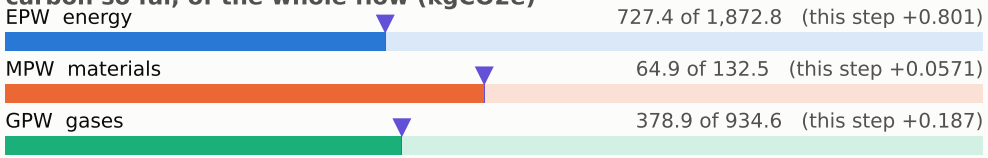

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

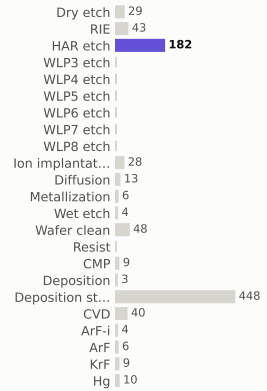

materials deposited (g)

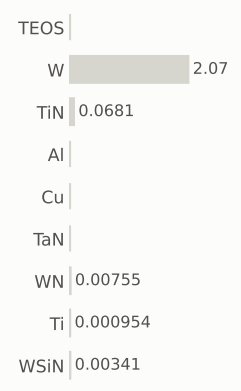

gases emitted (g)

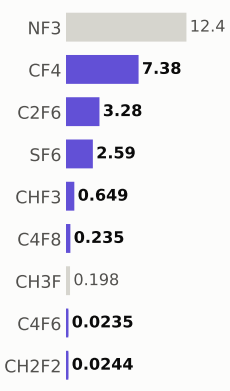

Step #11624.3624: HAR_etch

etch_noop · HAR_etch

1.04	1,172.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

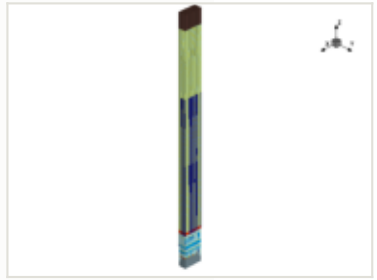

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

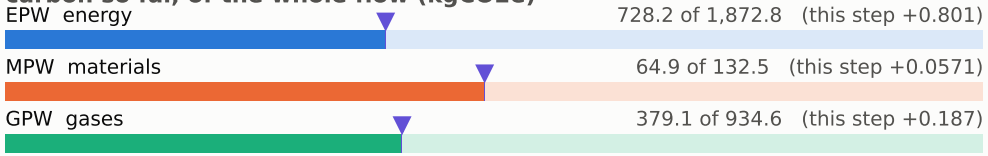

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

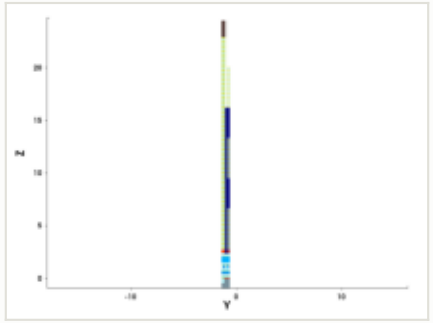

y cut at -1.035 µm

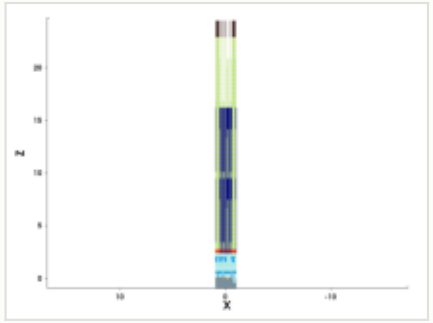

mask for this step

no mask for this step

steps by process area

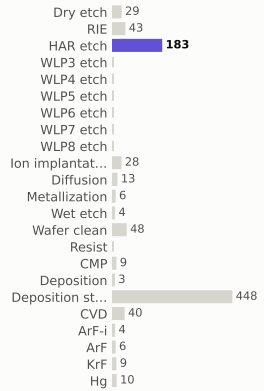

materials deposited (g)

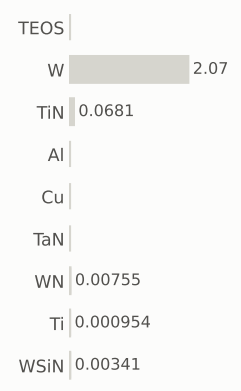

gases emitted (g)

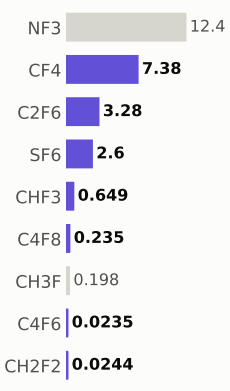

Step #11624.4295: HAR_etch

etch_noop · HAR_etch

1.04	1,173.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

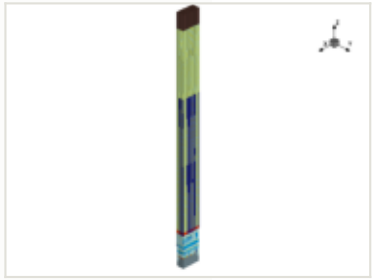

x cut at 0.000 µm

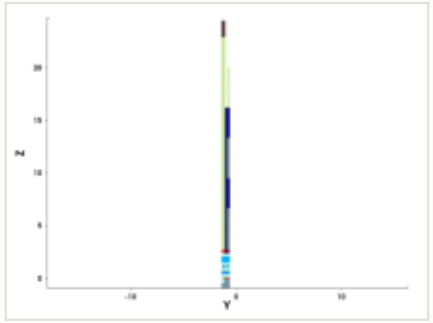

y cut at -1.035 µm

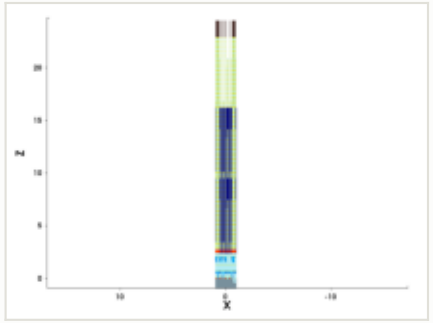

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

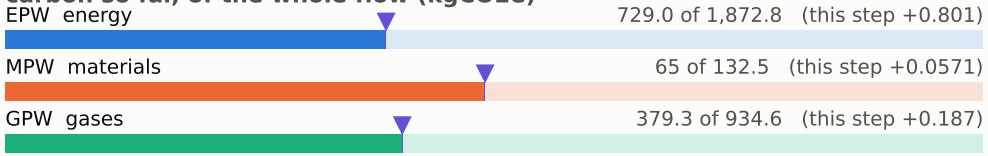

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

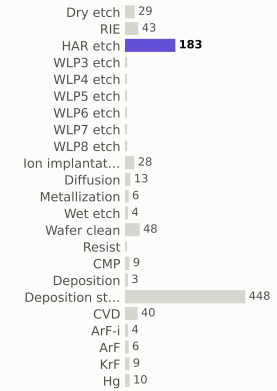

materials deposited (g)

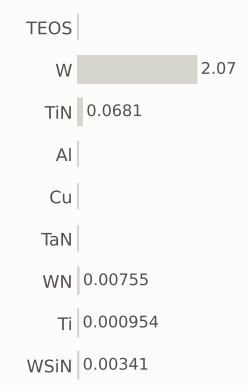

gases emitted (g)

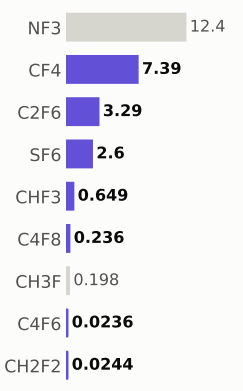

Step #11624.4966: HAR_etch

etch_noop · HAR_etch

1.04	1,174.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

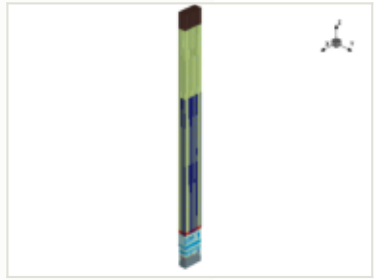

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

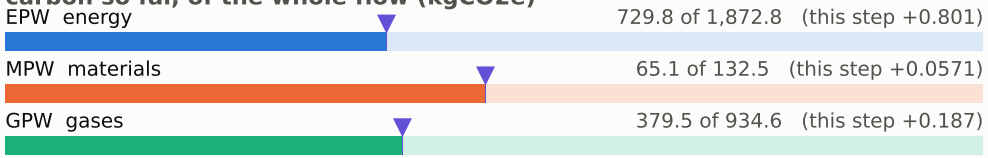

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

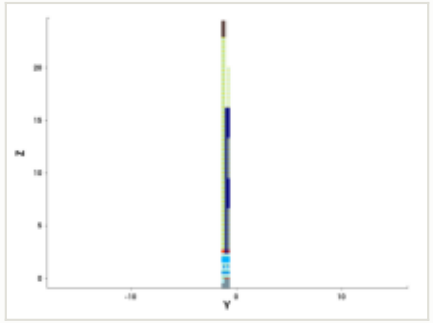

y cut at -1.035 µm

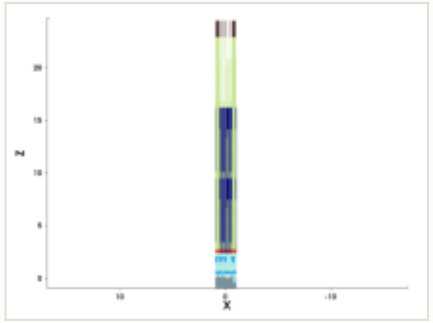

mask for this step

no mask for this step

steps by process area

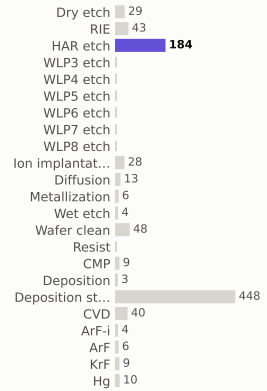

materials deposited (g)

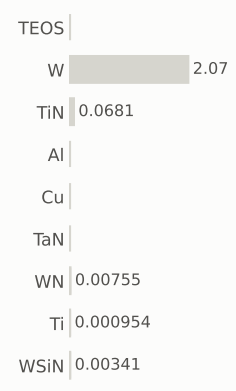

gases emitted (g)

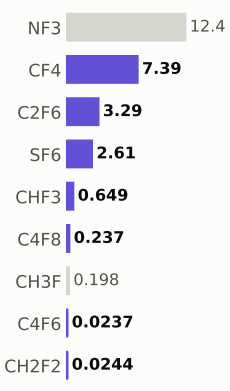

Step #11624.5638: HAR_etch

etch_noop · HAR_etch

1.04	1,175.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

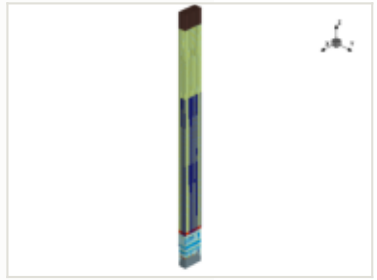

x cut at 0.000 µm

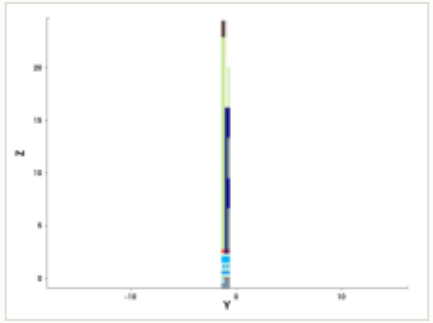

y cut at -1.035 µm

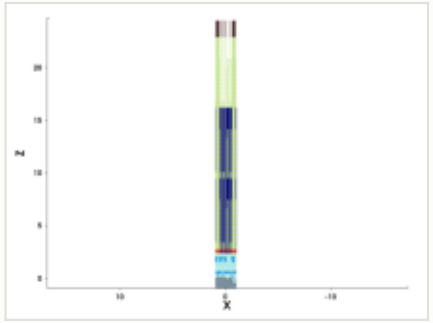

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

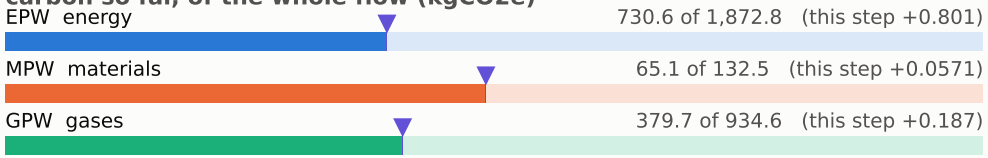

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

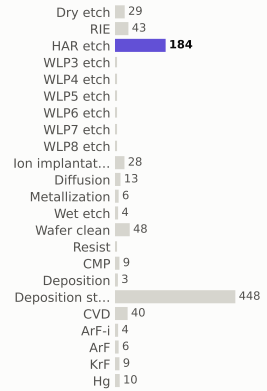

materials deposited (g)

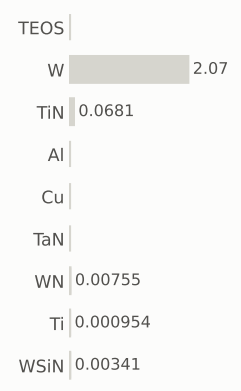

gases emitted (g)

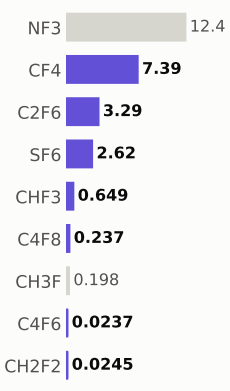

Step #11624.6309: HAR_etch

etch_noop · HAR_etch

1.04	1,176.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

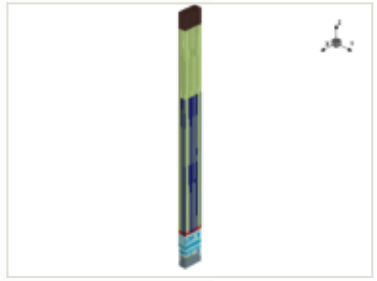

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

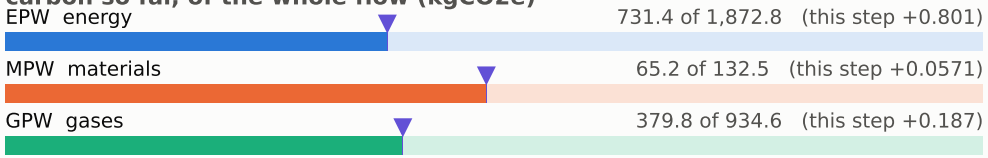

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

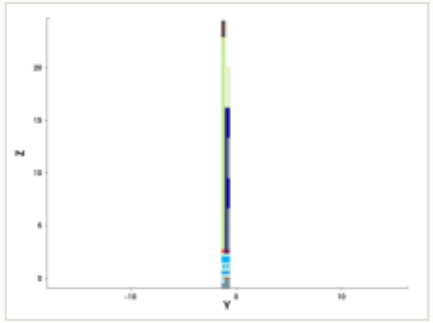

y cut at -1.035 µm

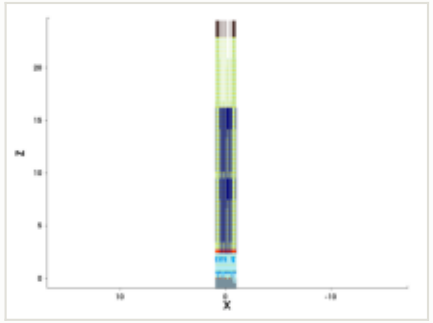

mask for this step

no mask for this step

steps by process area

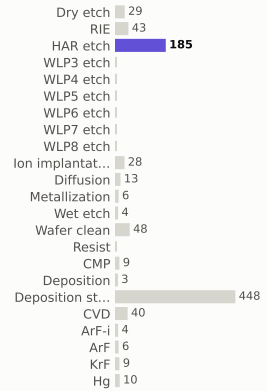

materials deposited (g)

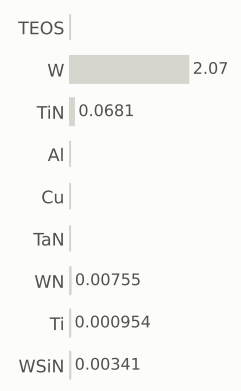

gases emitted (g)

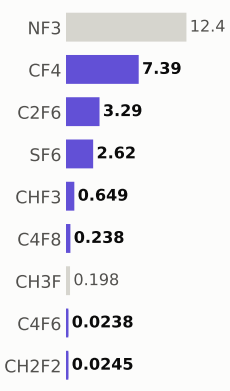

Step #11624.698: HAR_etch

etch_noop · HAR_etch

1.04	1,177.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

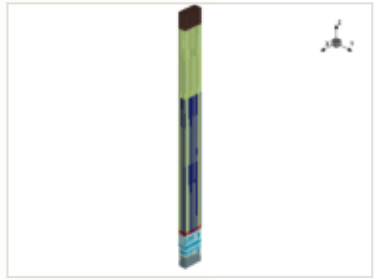

x cut at 0.000 µm

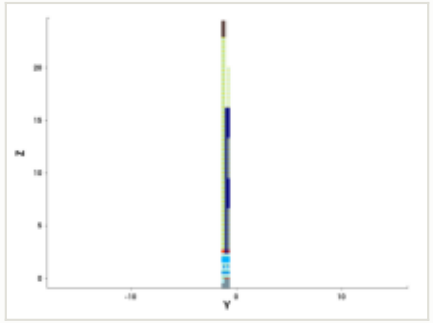

y cut at -1.035 µm

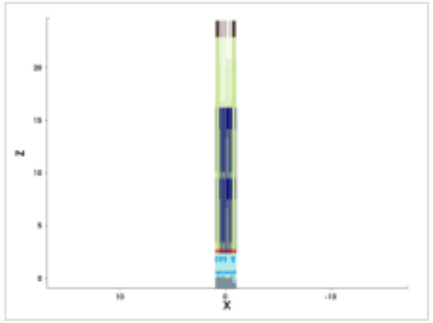

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

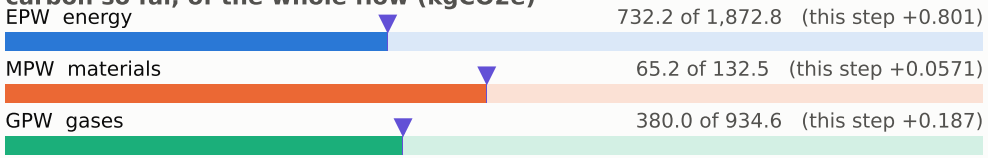

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

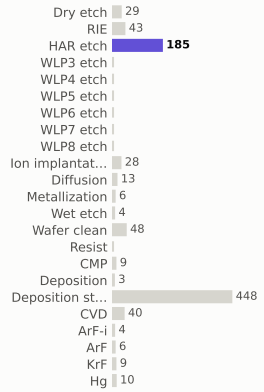

materials deposited (g)

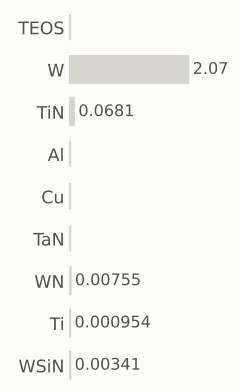

gases emitted (g)



Step #11624.7651: HAR_etch

etch_noop · HAR_etch

1.04	1,178.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

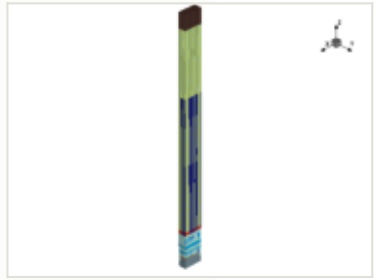

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

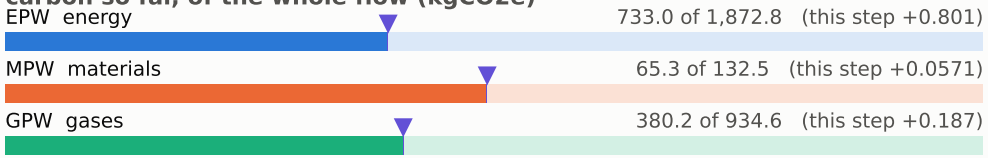

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

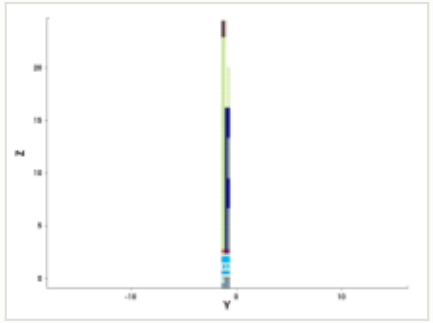

y cut at -1.035 µm

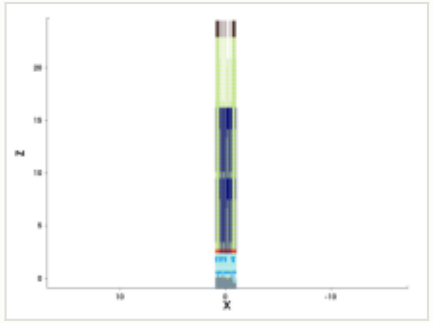

mask for this step

no mask for this step

steps by process area

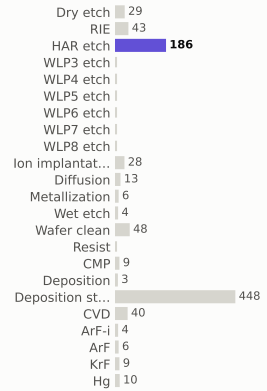

materials deposited (g)

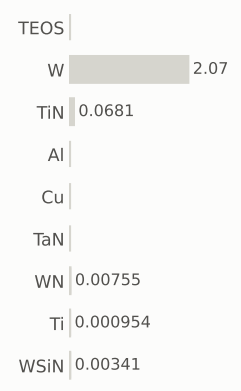

gases emitted (g)

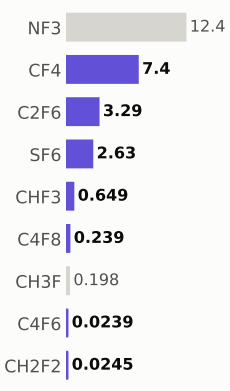

Step #11624.8322: HAR_etch

etch_noop · HAR_etch

1.04	1,179.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

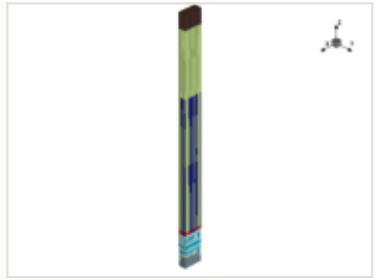

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

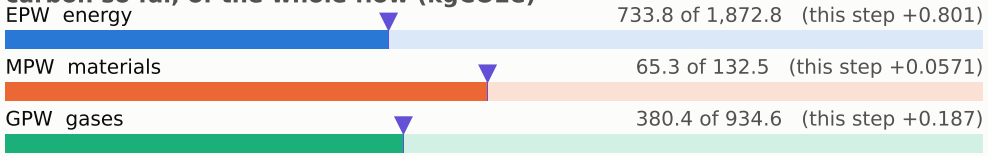

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

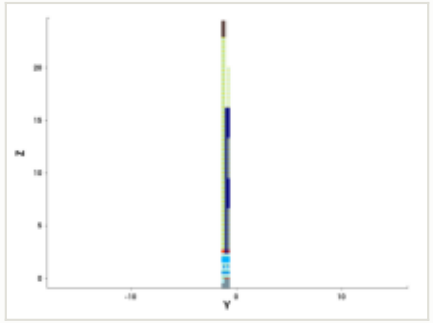

y cut at -1.035 µm

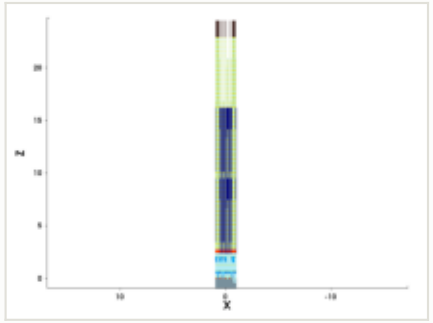

mask for this step

no mask for this step

steps by process area

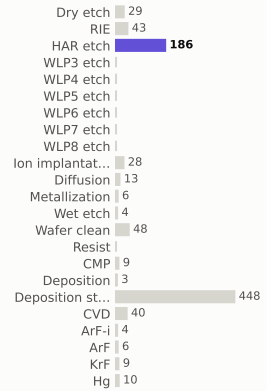

materials deposited (g)

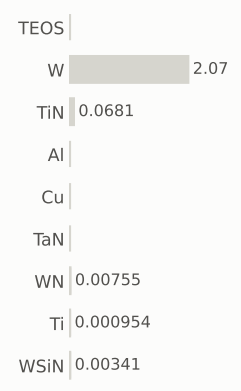

gases emitted (g)

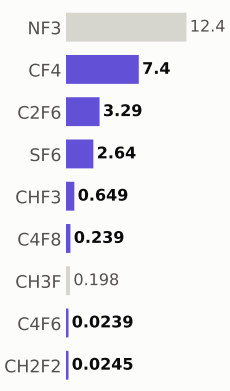

Step #11624.8993: HAR_etch

etch_noop · HAR_etch

1.04	1,180.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

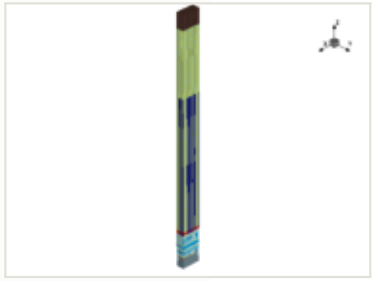

x cut at 0.000 µm

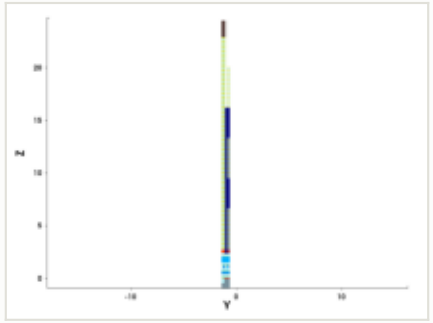

y cut at -1.035 µm

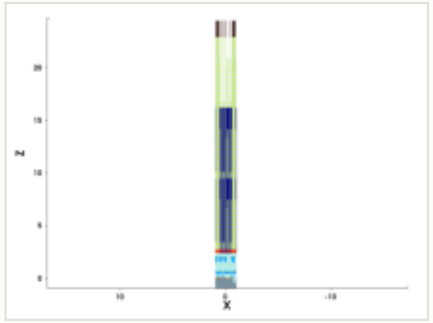

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

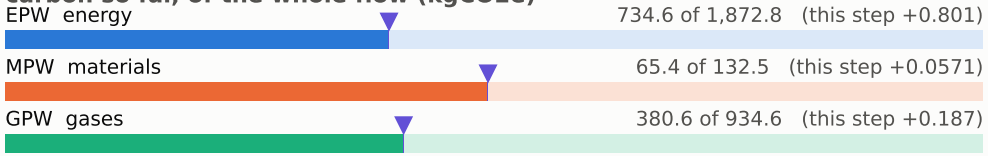

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

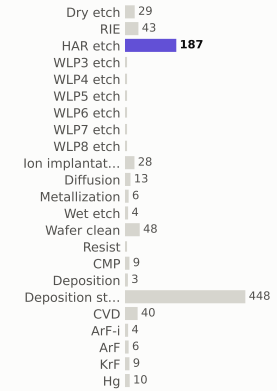

materials deposited (g)

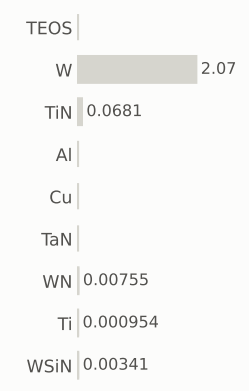

gases emitted (g)

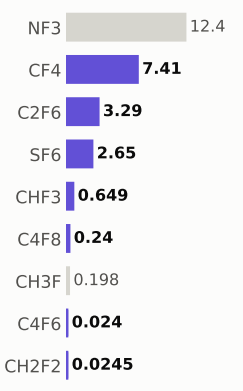

Step #11624.9664: HAR_etch

etch_noop · HAR_etch

1.04	1,181.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

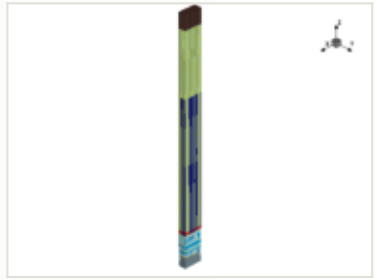

x cut at 0.000 µm

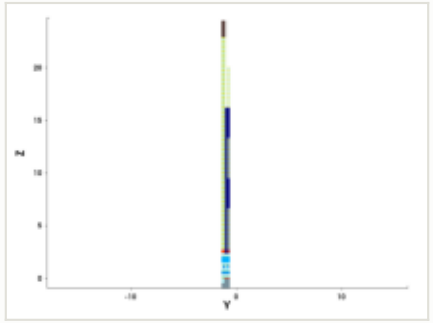

y cut at -1.035 µm

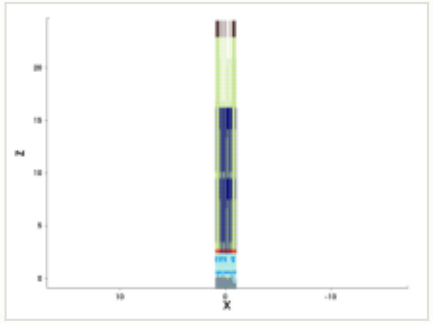

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

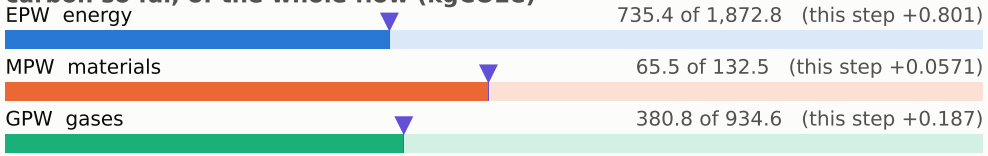

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

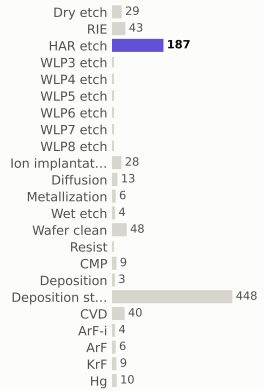

materials deposited (g)

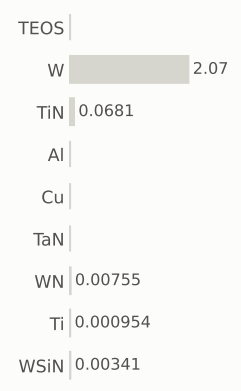

gases emitted (g)

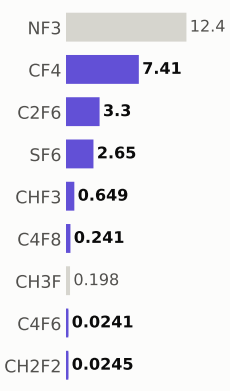

Step #11625.0336: HAR_etch

etch_noop · HAR_etch

1.04	1,182.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

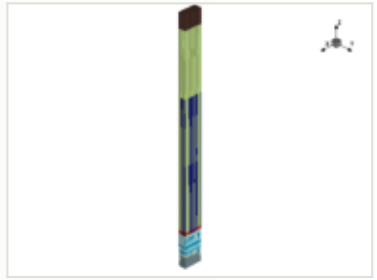

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

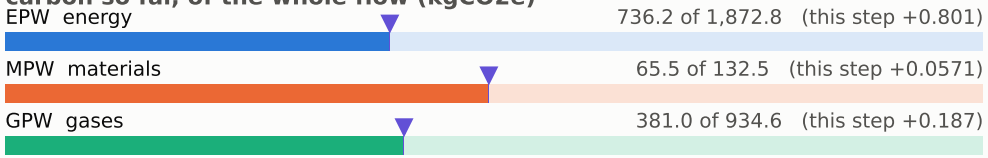

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

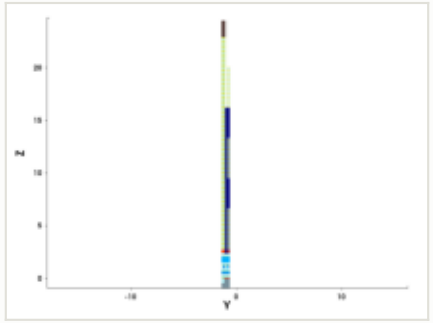

y cut at -1.035 µm

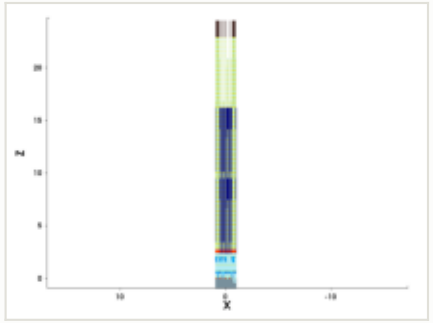

mask for this step

no mask for this step

steps by process area

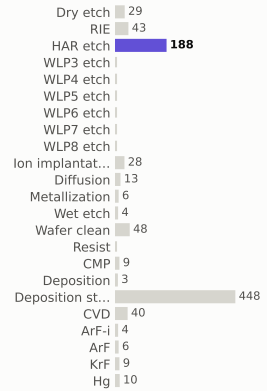

materials deposited (g)

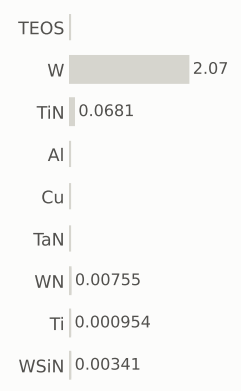

gases emitted (g)

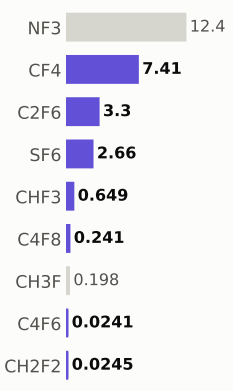

Step #11625.1007: HAR_etch

etch_noop · HAR_etch

1.04	1,183.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

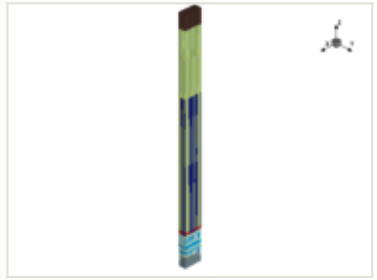

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

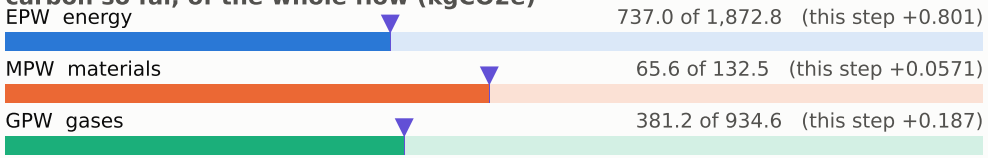

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

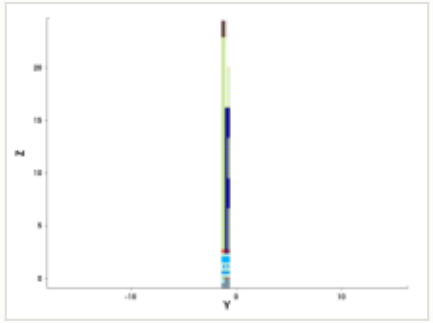

y cut at -1.035 µm

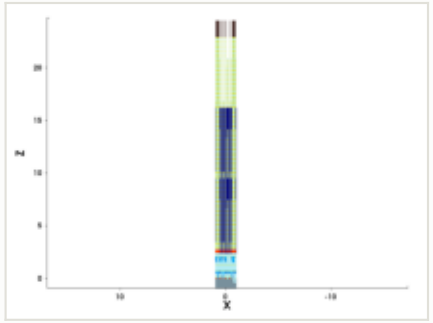

mask for this step

no mask for this step

steps by process area

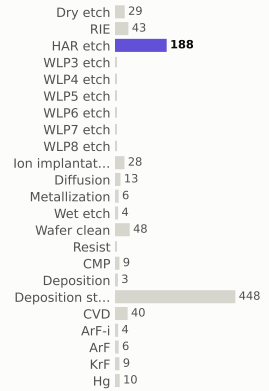

materials deposited (g)

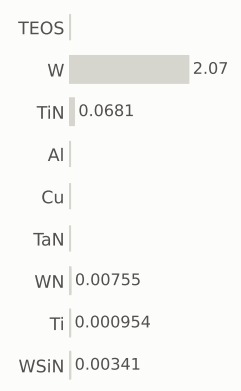

gases emitted (g)

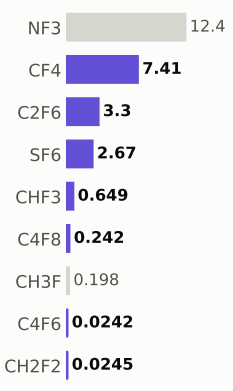

Step #11625.1678: HAR_etch

etch_noop · HAR_etch

1.04	1,184.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

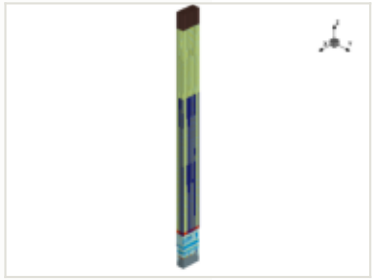

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

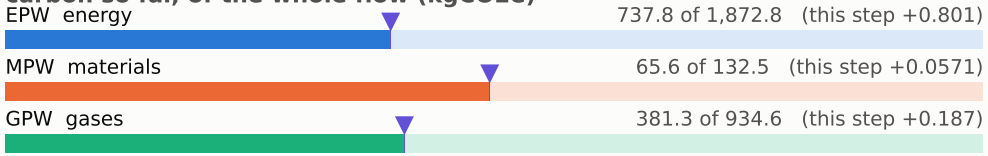

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

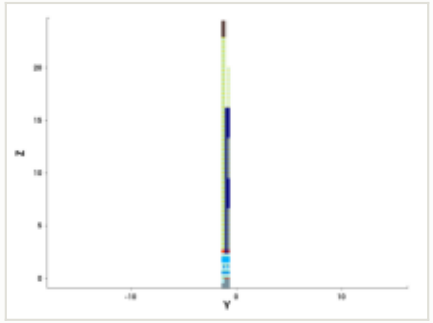

y cut at -1.035 µm

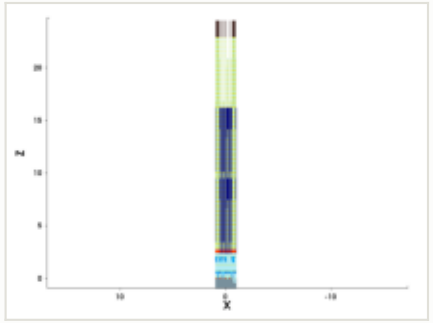

mask for this step

no mask for this step

steps by process area

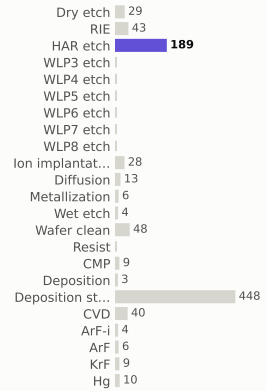

materials deposited (g)

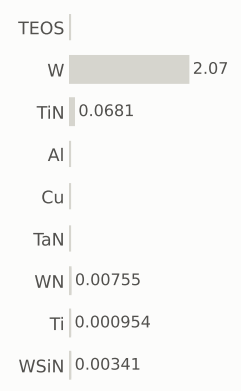

gases emitted (g)

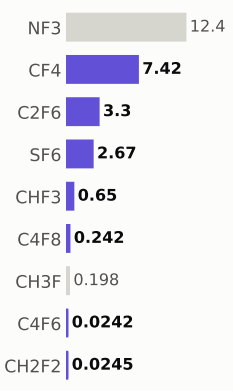

Step #11625.2349: HAR_etch

etch_noop · HAR_etch

1.04	1,185.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

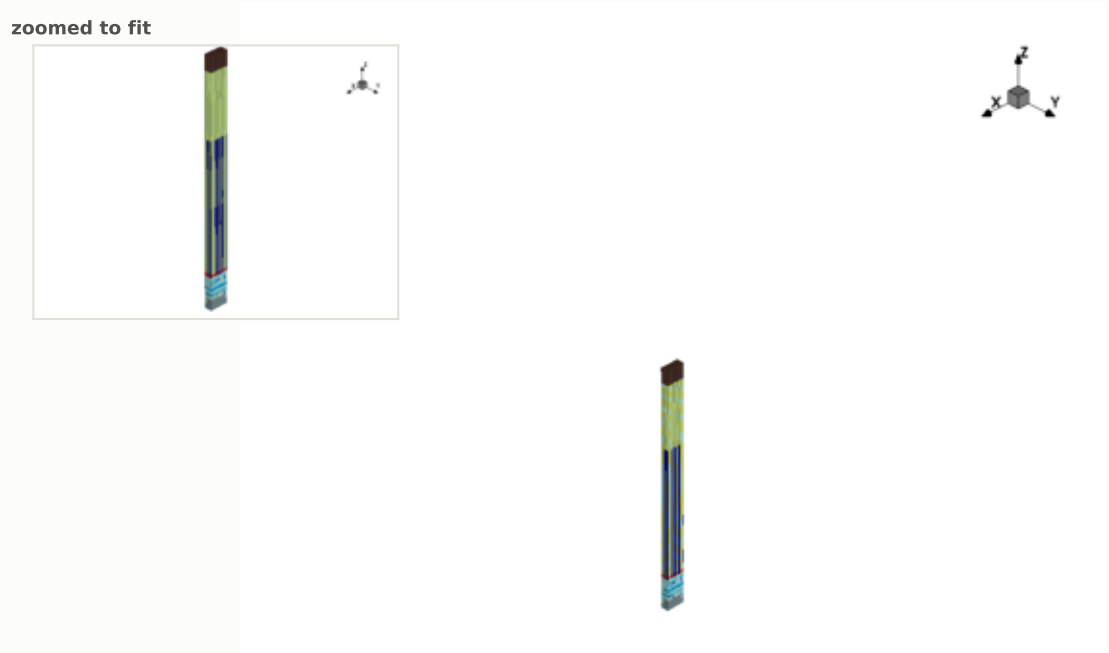

x cut at 0.000 µm

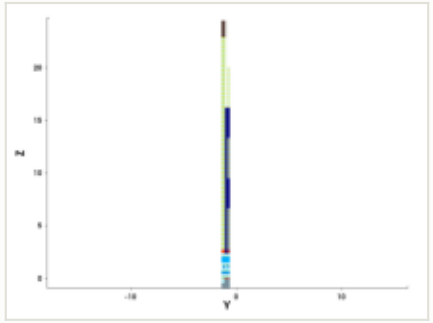

y cut at -1.035 µm

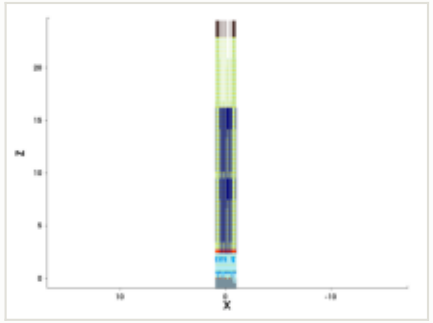

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

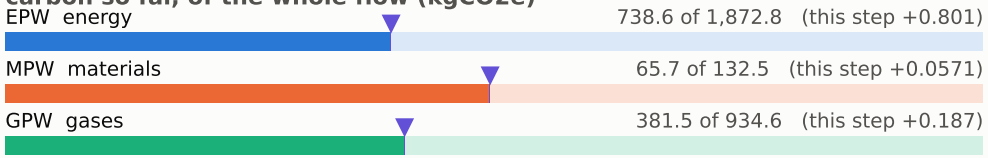

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

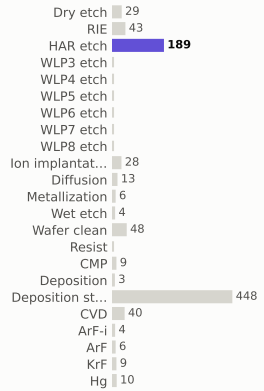

materials deposited (g)

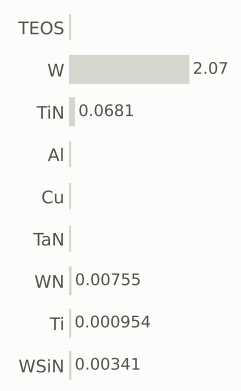

gases emitted (g)

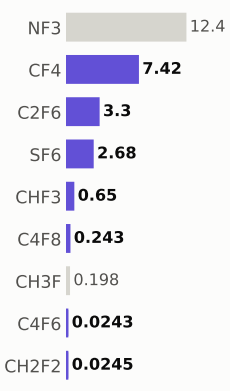

Step #11625.302: HAR_etch

etch_noop · HAR_etch

1.04	1,186.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

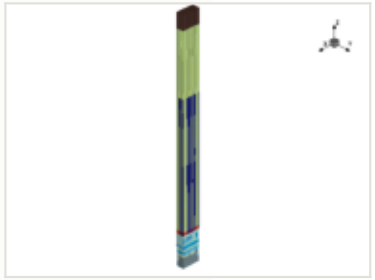

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

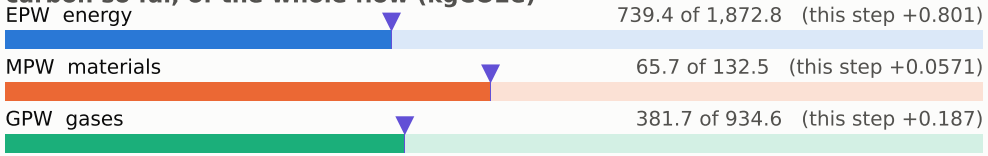

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

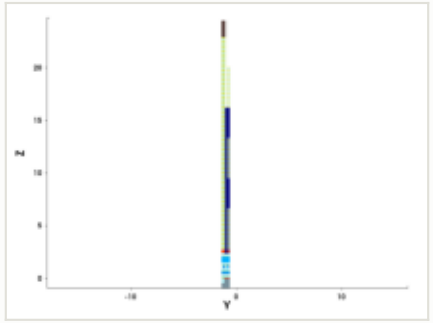

y cut at -1.035 µm

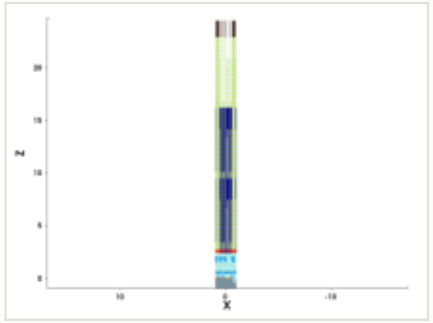

mask for this step

no mask for this step

steps by process area

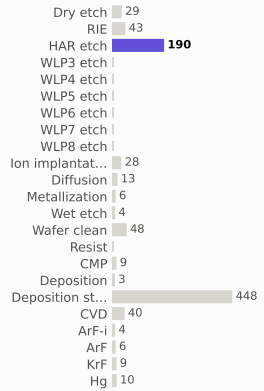

materials deposited (g)

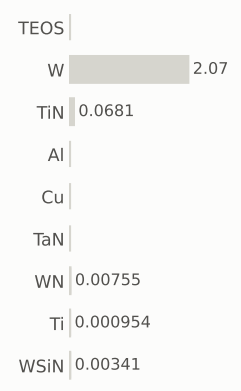

gases emitted (g)

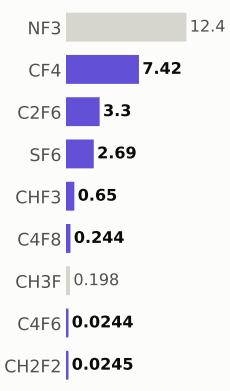

Step #11625.3691: HAR_etch

etch_noop · HAR_etch

1.04	1,187.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

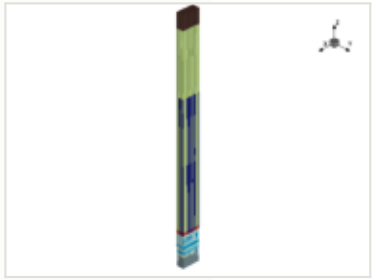

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

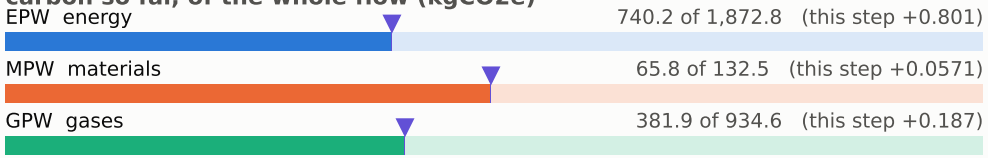

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

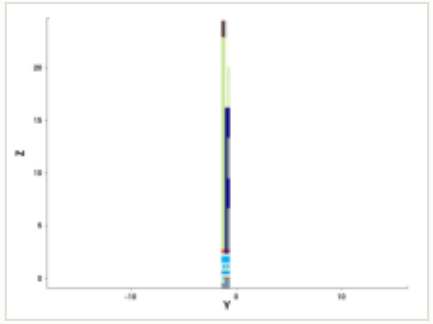

y cut at -1.035 µm

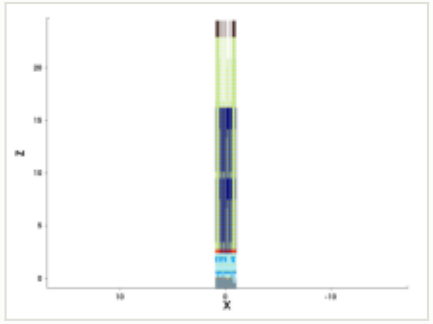

mask for this step

no mask for this step

steps by process area

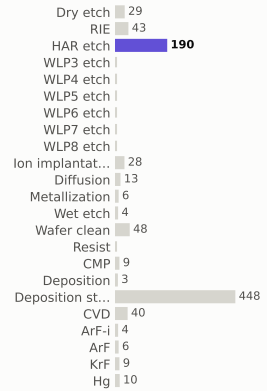

materials deposited (g)

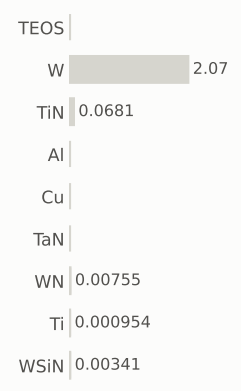

gases emitted (g)

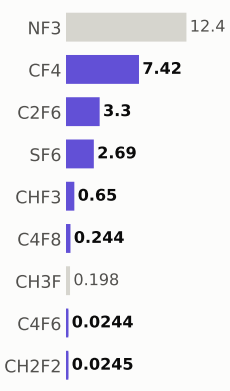

Step #11625.4362: HAR_etch

etch_noop · HAR_etch

1.04	1,189.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

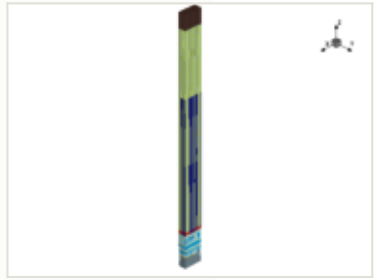

x cut at 0.000 µm

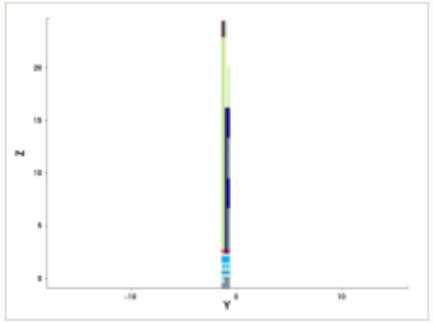

y cut at -1.035 µm

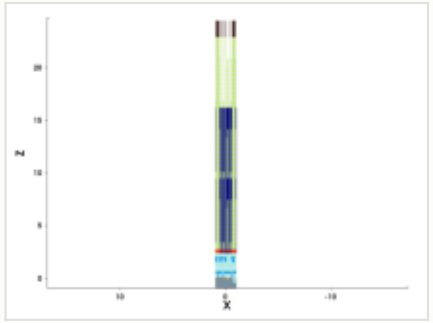

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

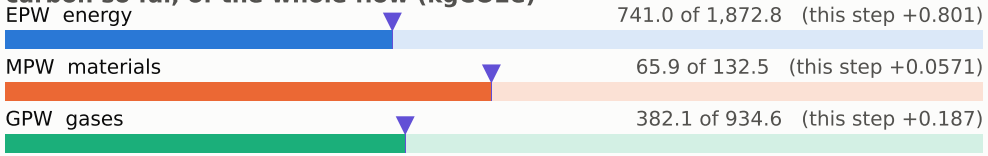

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

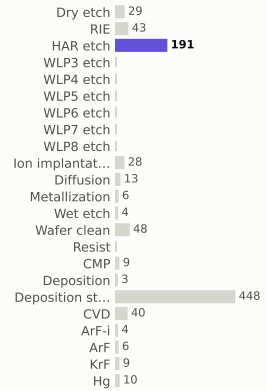

materials deposited (g)

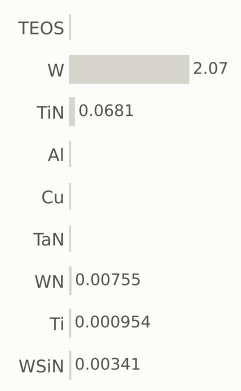

gases emitted (g)

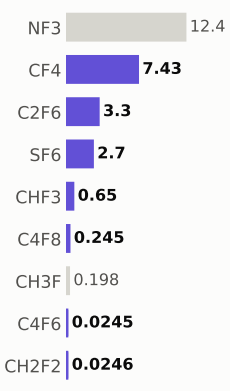

Step #11625.5034: HAR_etch

etch_noop · HAR_etch

1.04	1,190.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

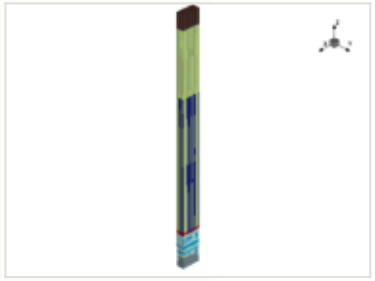

x cut at 0.000 µm

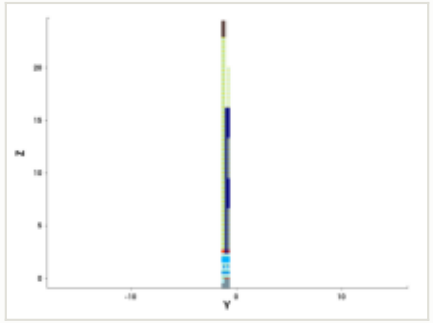

y cut at -1.035 µm

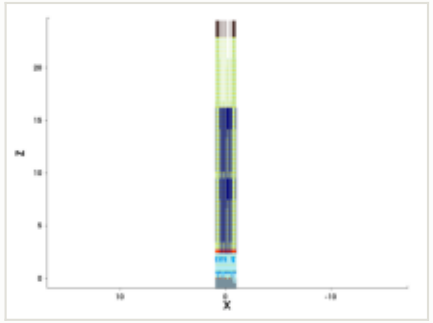

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

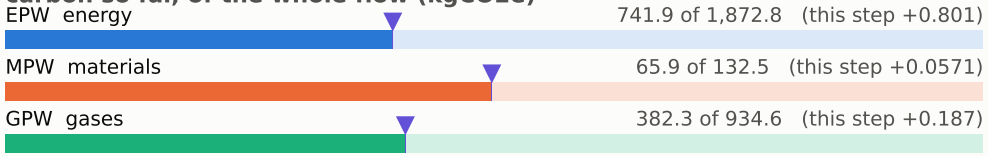

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

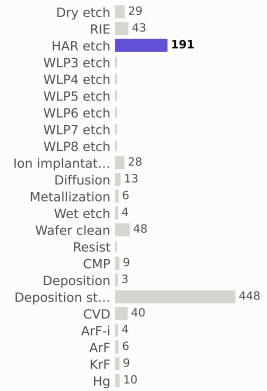

materials deposited (g)

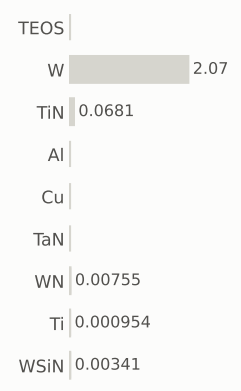

gases emitted (g)

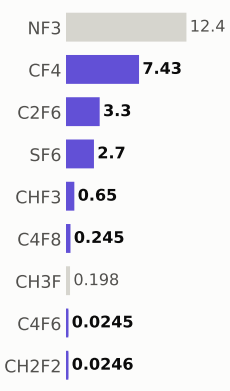

Step #11625.5705: HAR_etch

etch_noop · HAR_etch

1.04	1,191.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

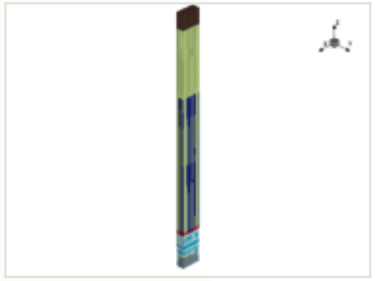

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

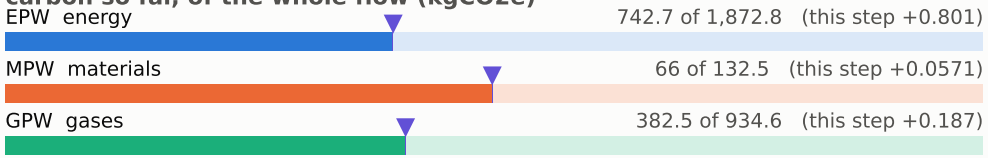

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

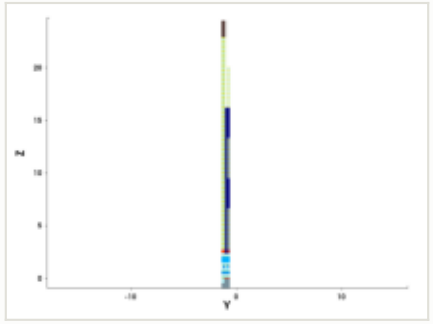

y cut at -1.035 µm

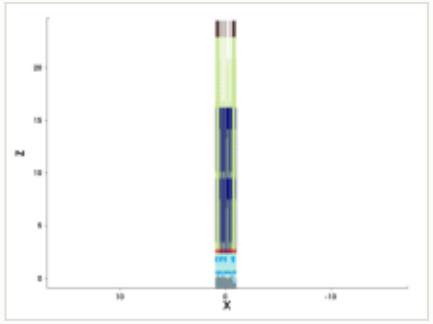

mask for this step

no mask for this step

steps by process area

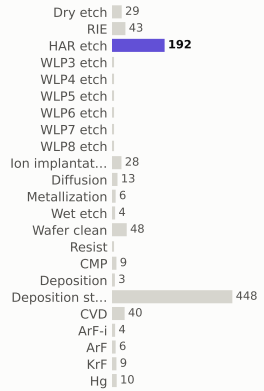

materials deposited (g)

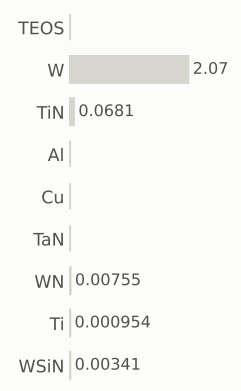

gases emitted (g)

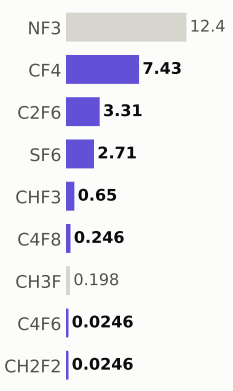

Step #11625.6376: HAR_etch

etch_noop · HAR_etch

1.04	1,192.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

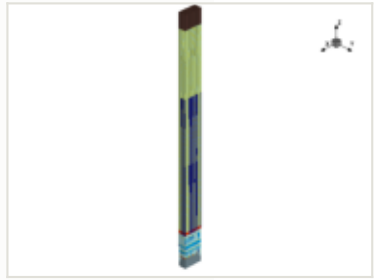



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

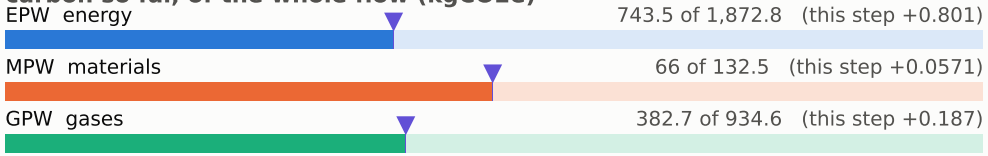

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

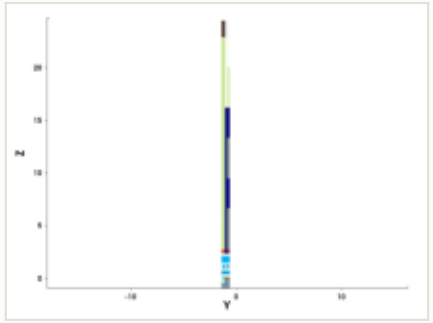

y cut at -1.035 µm

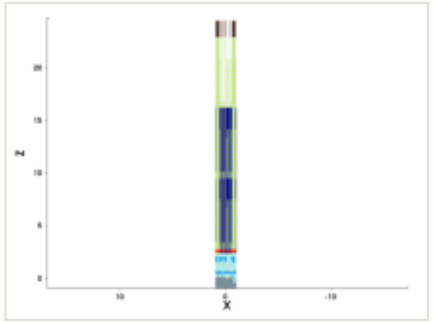

mask for this step

no mask for this step

steps by process area

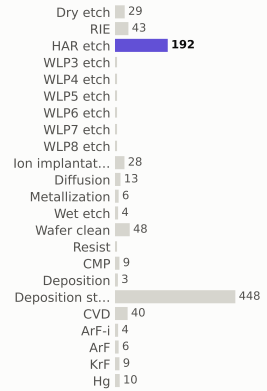

materials deposited (g)

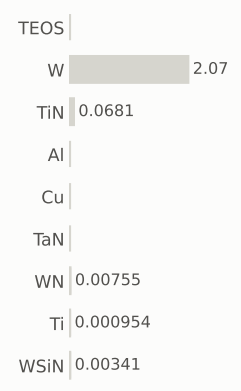

gases emitted (g)

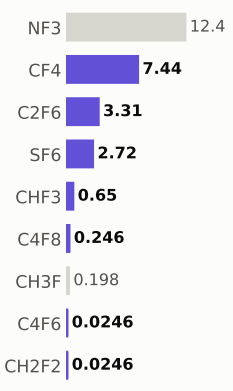

Step #11625.7047: HAR_etch

etch_noop · HAR_etch

1.04	1,193.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

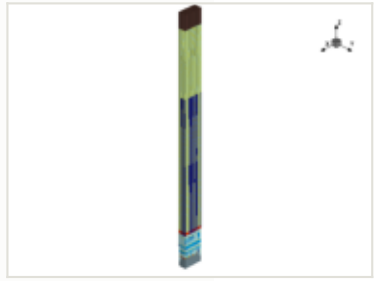

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

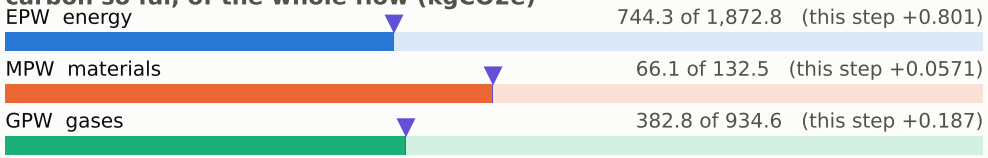

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

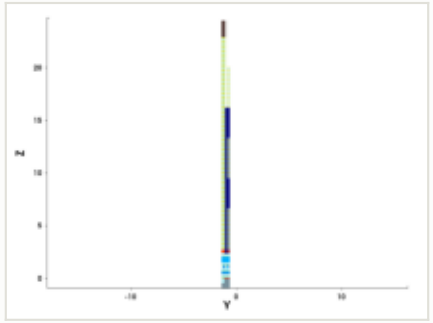

y cut at -1.035 µm

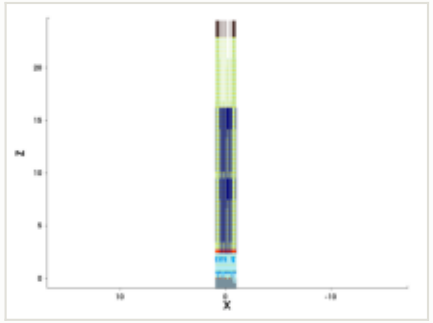

mask for this step

no mask for this step

steps by process area

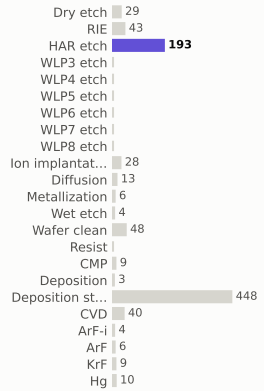

materials deposited (g)

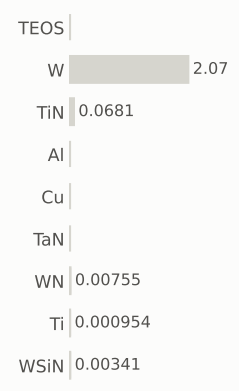

gases emitted (g)

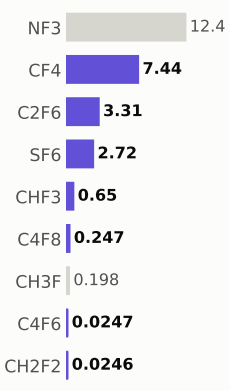

Step #11625.7718: HAR_etch

etch_noop · HAR_etch

1.04	1,194.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

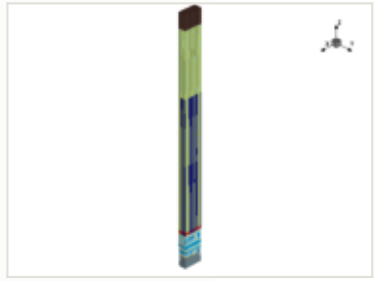

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

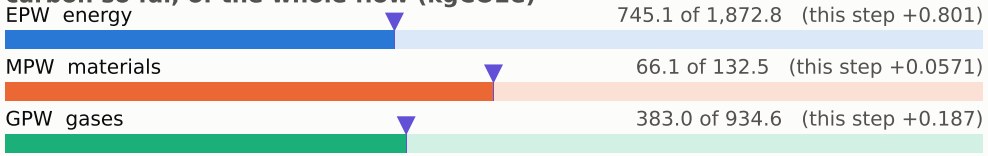

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

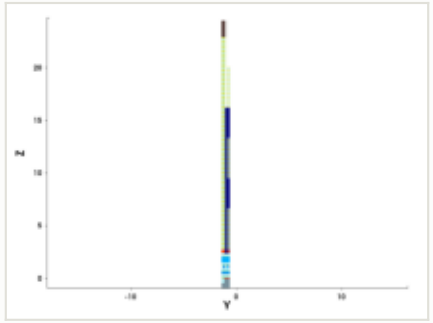

y cut at -1.035 µm

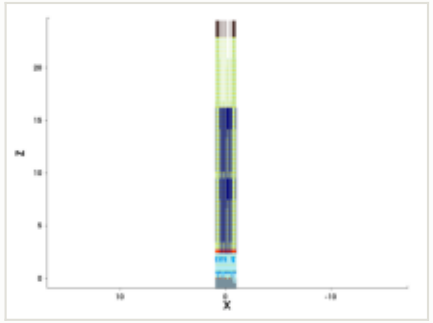

mask for this step

no mask for this step

steps by process area

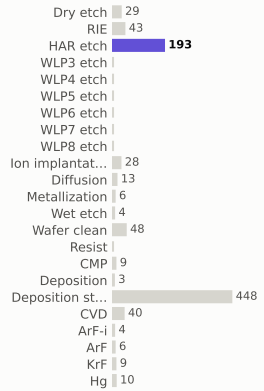

materials deposited (g)

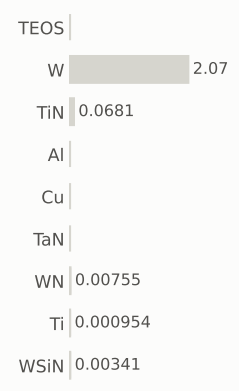

gases emitted (g)

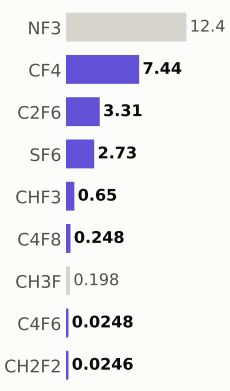

Step #11625.8389: HAR_etch

etch_noop · HAR_etch

1.04	1,195.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

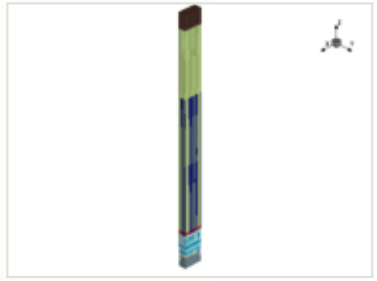

x cut at 0.000 µm

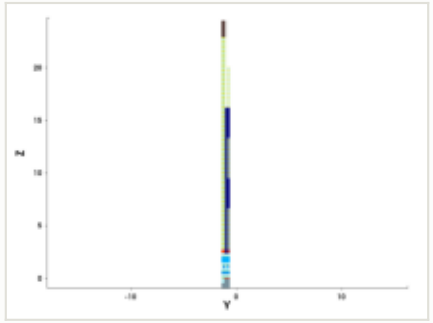

y cut at -1.035 µm

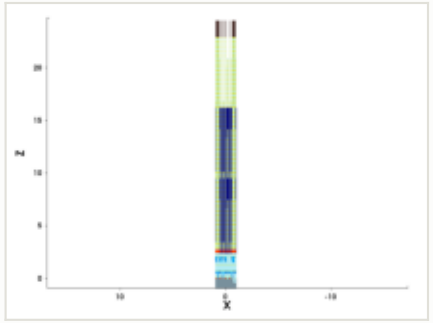

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

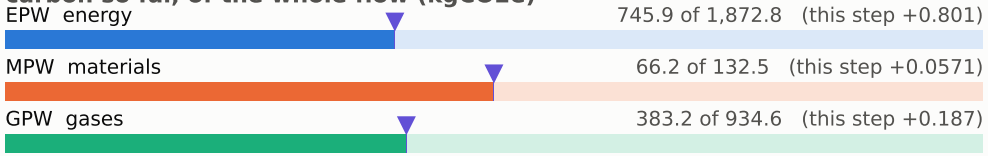

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

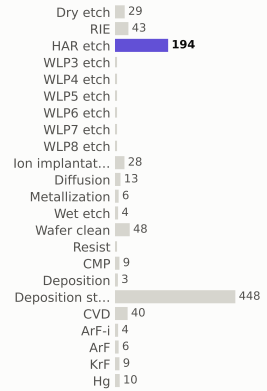

materials deposited (g)

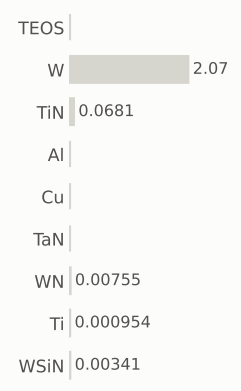

gases emitted (g)

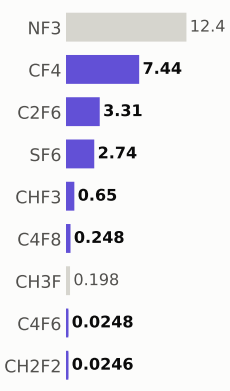

Step #11625.906: HAR_etch

etch_noop · HAR_etch

1.04	1,196.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

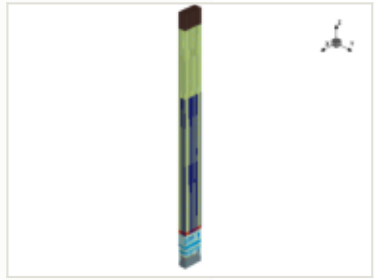

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

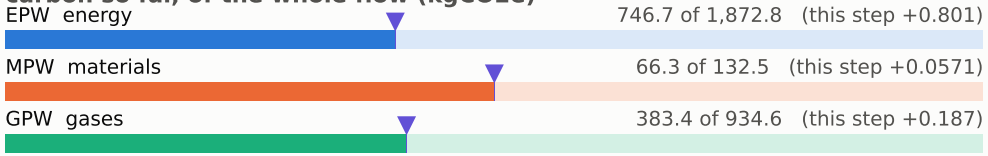

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

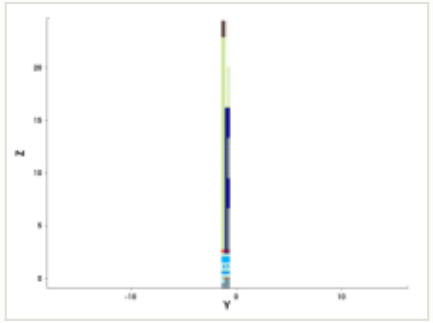

y cut at -1.035 µm

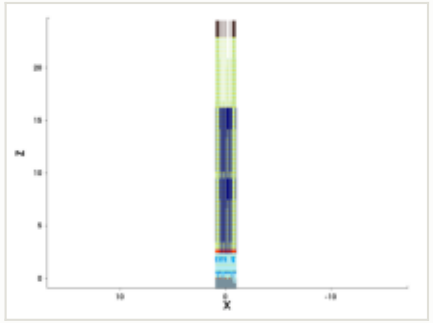

mask for this step

no mask for this step

steps by process area

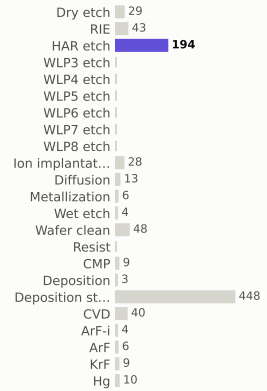

materials deposited (g)

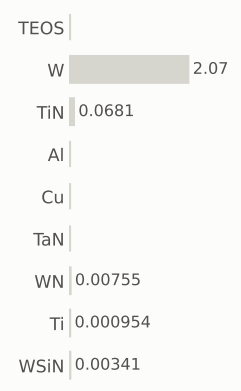

gases emitted (g)

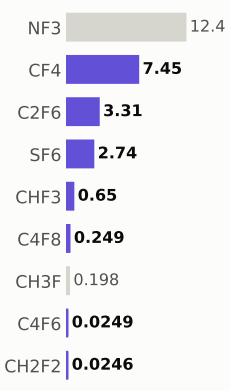

Step #11625.9732: HAR_etch

etch_noop · HAR_etch

1.04	1,197.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

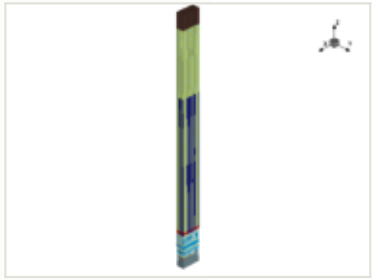

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

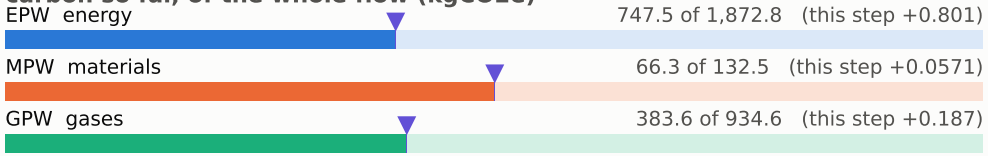

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

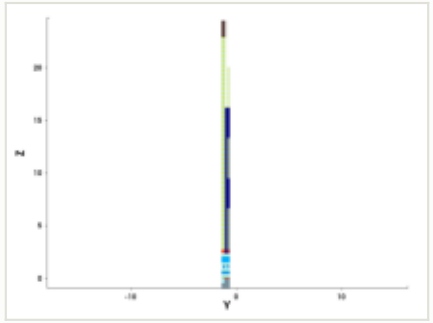

y cut at -1.035 µm

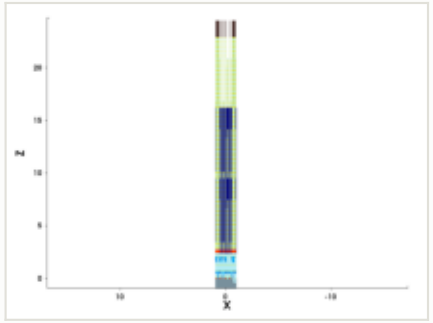

mask for this step

no mask for this step

steps by process area

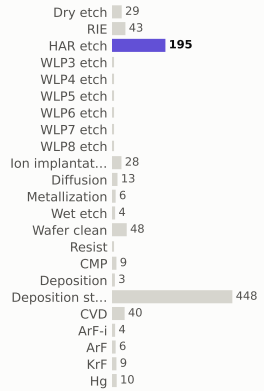

materials deposited (g)

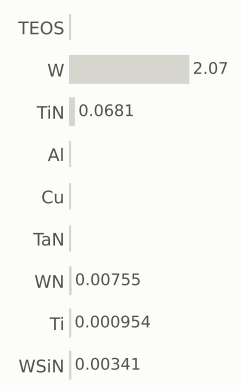

gases emitted (g)

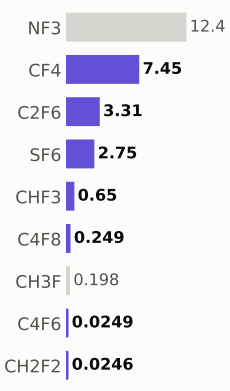

Step #11626.0403: HAR_etch

etch_noop · HAR_etch

1.04	1,198.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

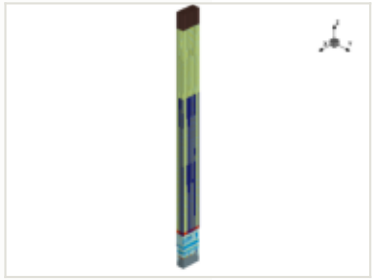

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

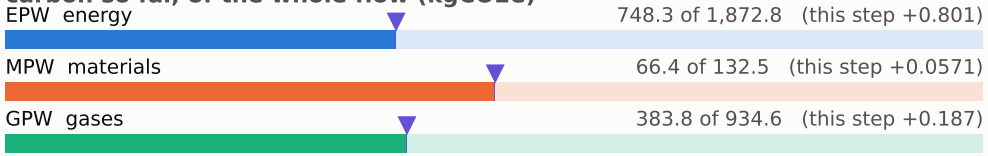

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

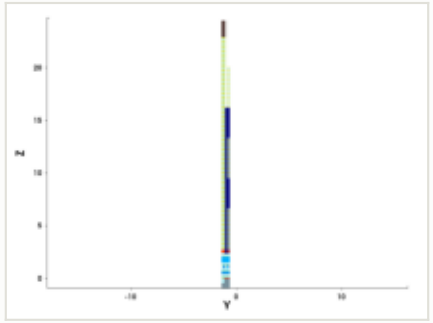

y cut at -1.035 µm

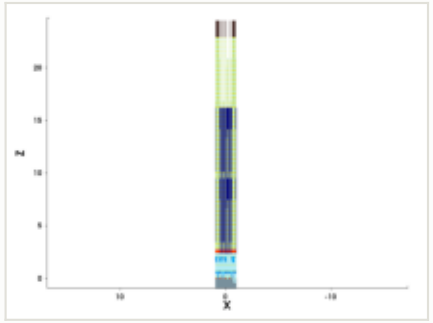

mask for this step

no mask for this step

steps by process area

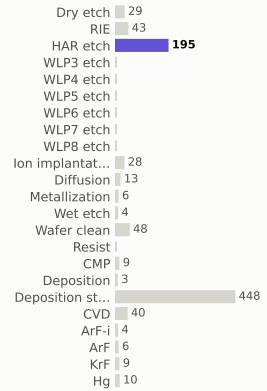

materials deposited (g)

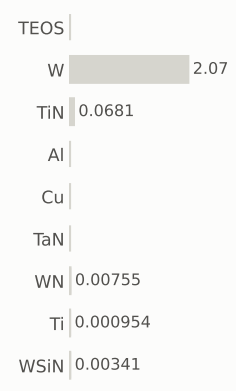

gases emitted (g)

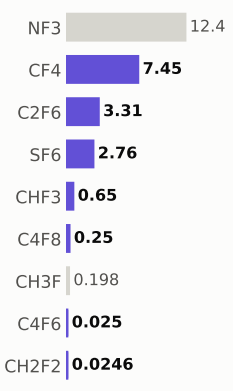

Step #11626.1074: HAR_etch

etch_noop · HAR_etch

1.04	1,199.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

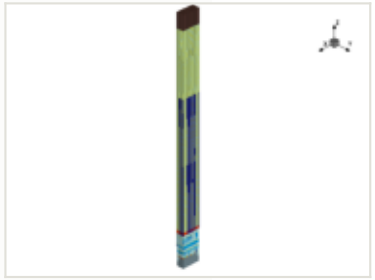

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

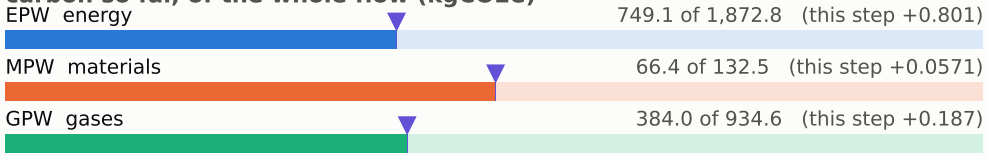

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

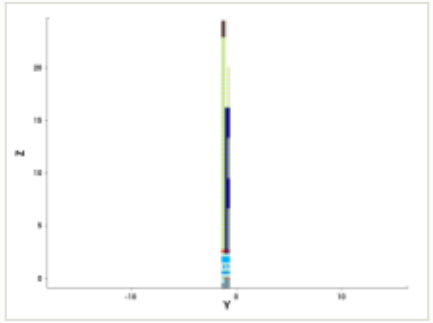

y cut at -1.035 µm

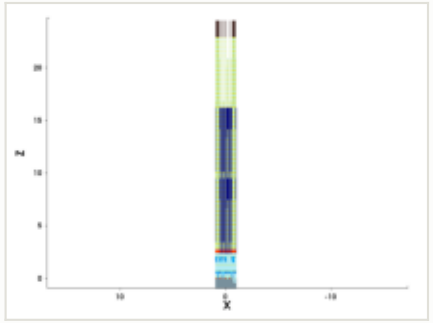

mask for this step

no mask for this step

steps by process area

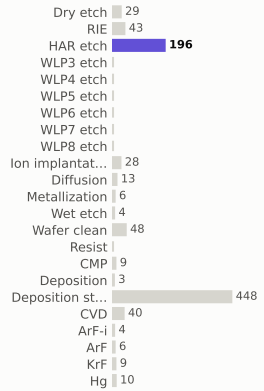

materials deposited (g)

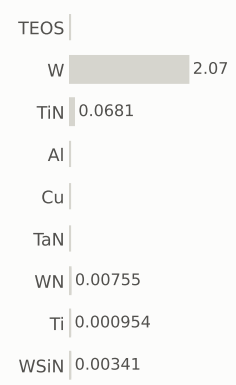

gases emitted (g)



Step #11626.1745: HAR_etch

etch_noop · HAR_etch

1.04	1,200.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

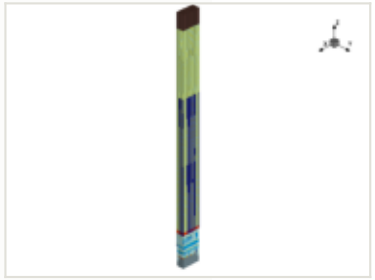

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

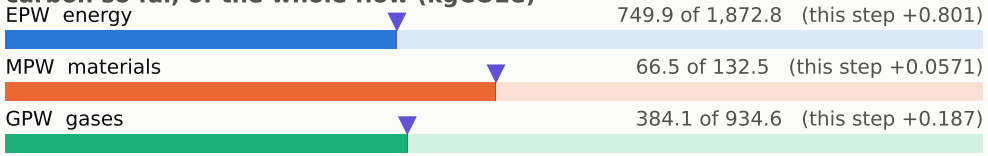

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

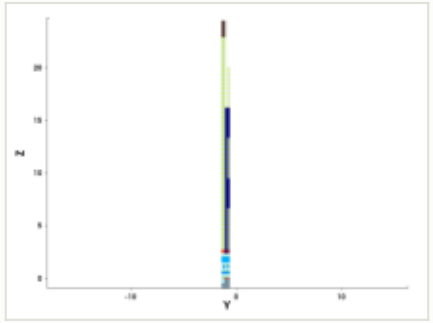

y cut at -1.035 µm

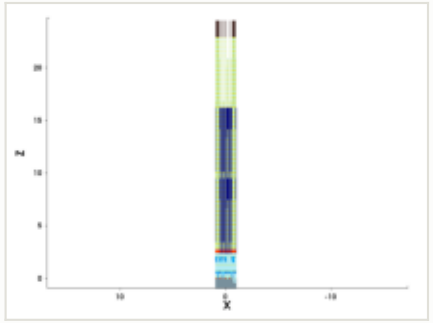

mask for this step

no mask for this step

steps by process area

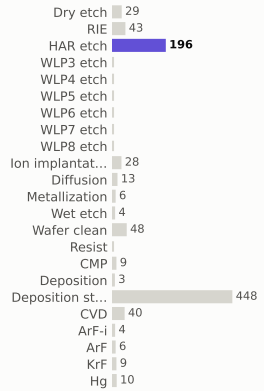

materials deposited (g)

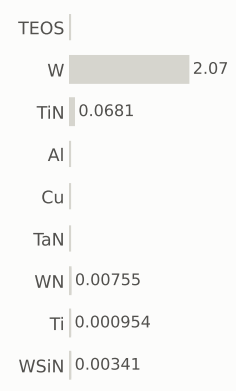

gases emitted (g)

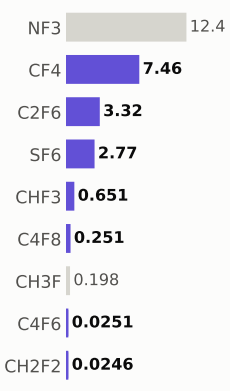

Step #11626.2416: HAR_etch

etch_noop · HAR_etch

1.04	1,201.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

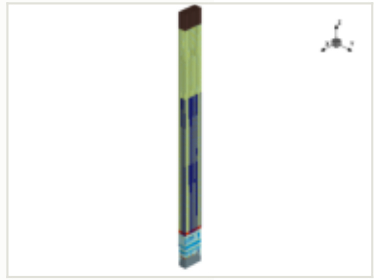

x cut at 0.000 µm

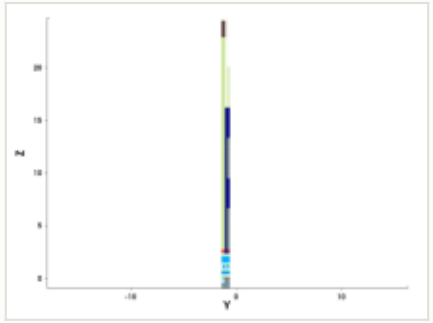

y cut at -1.035 µm

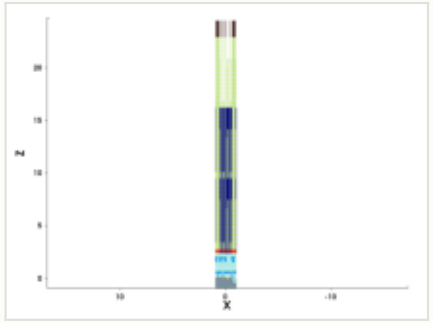

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

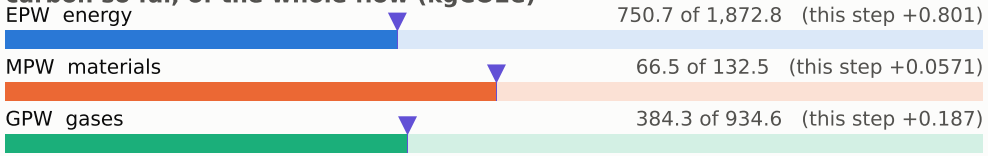

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

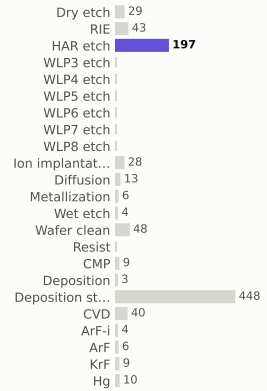

materials deposited (g)

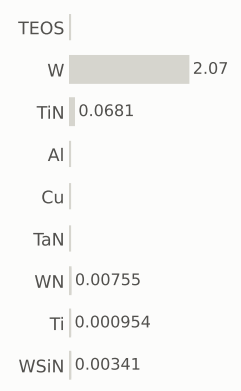

gases emitted (g)

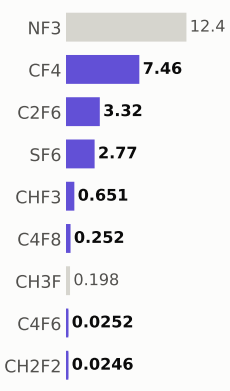

Step #11626.3087: HAR_etch

etch_noop · HAR_etch

1.04	1,202.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

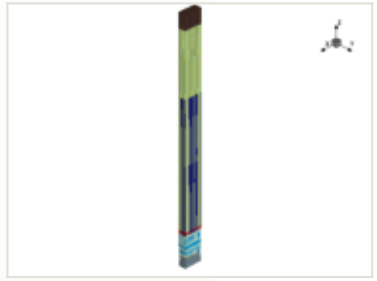

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

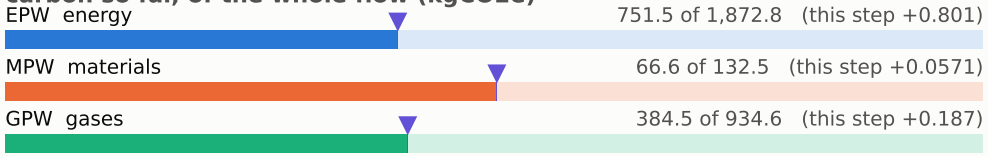

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

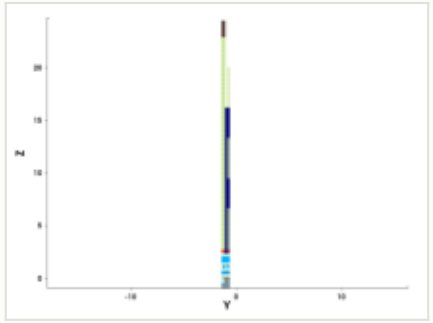

y cut at -1.035 µm

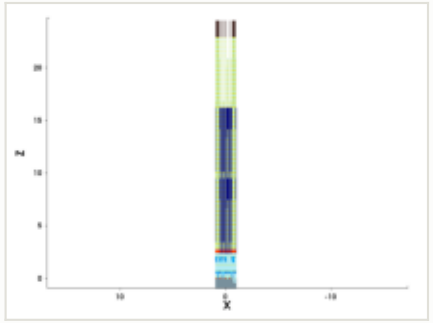

mask for this step

no mask for this step

steps by process area

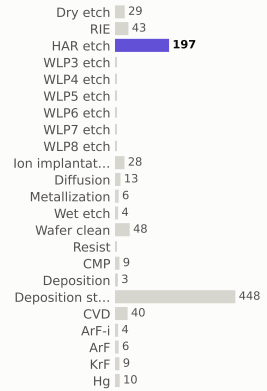

materials deposited (g)

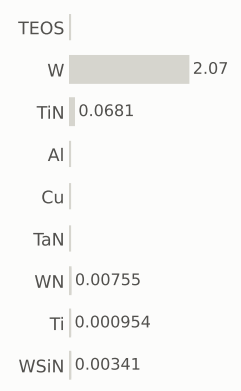

gases emitted (g)

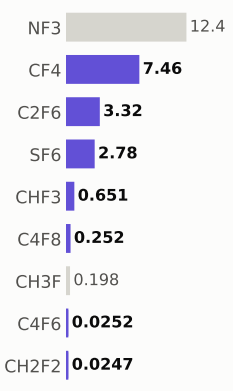

Step #11626.3758: HAR_etch

etch_noop · HAR_etch

1.04	1,203.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

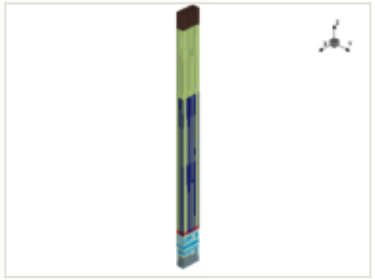

x cut at 0.000 µm

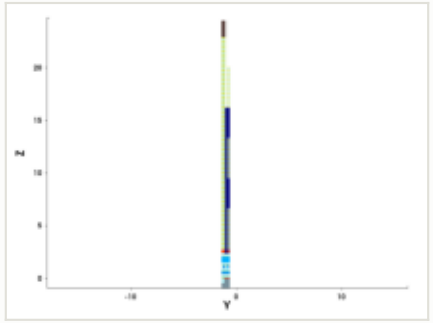

y cut at -1.035 µm

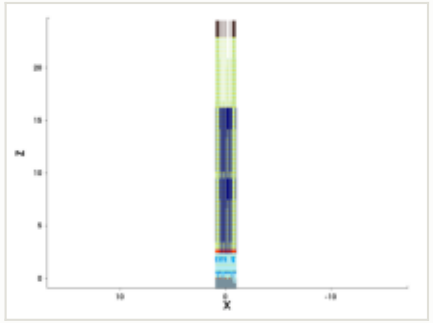

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

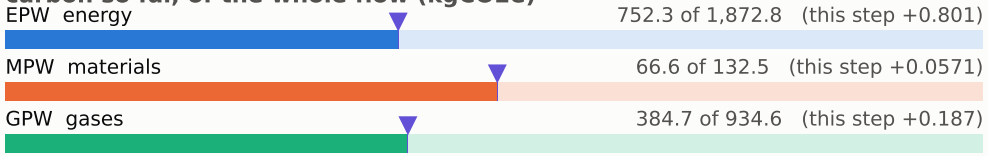

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

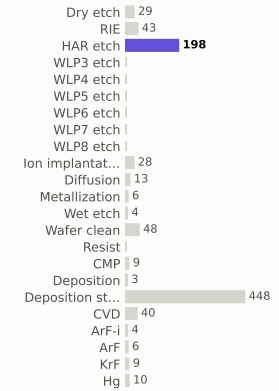

materials deposited (g)

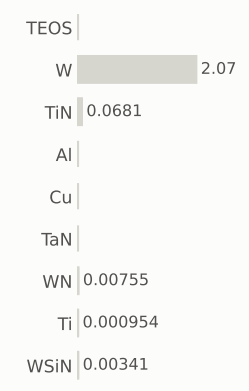

gases emitted (g)

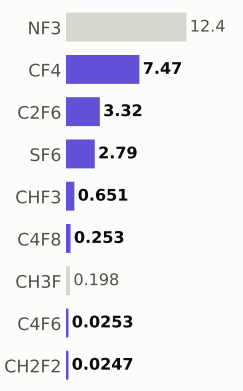

Step #11626.443: HAR_etch

etch_noop · HAR_etch

1.04	1,204.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

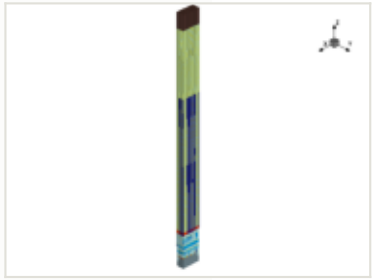

x cut at 0.000 µm

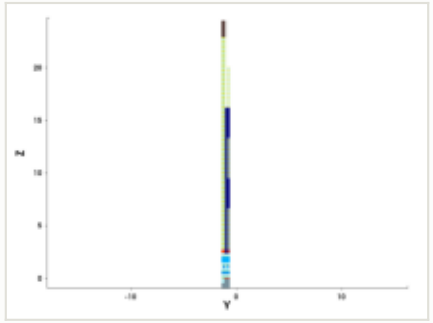

y cut at -1.035 µm

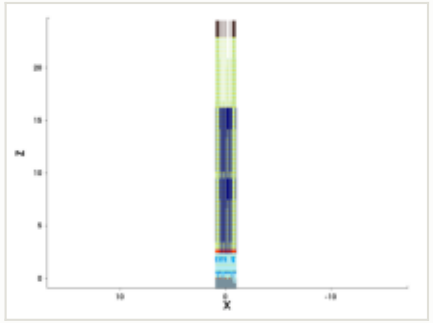

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

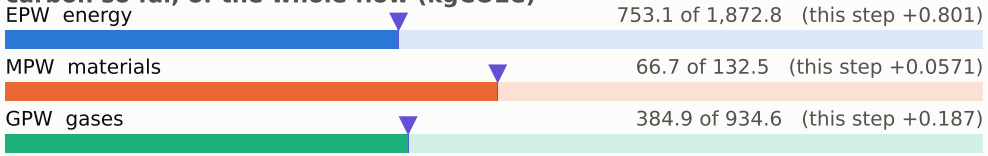

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

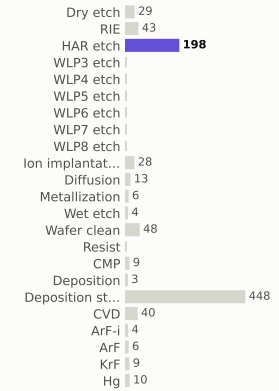

materials deposited (g)

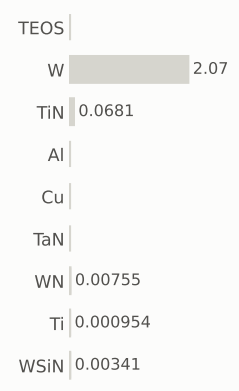

gases emitted (g)

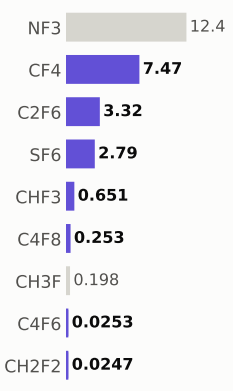

Step #11626.5101: HAR_etch

etch_noop · HAR_etch

1.04	1,205.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

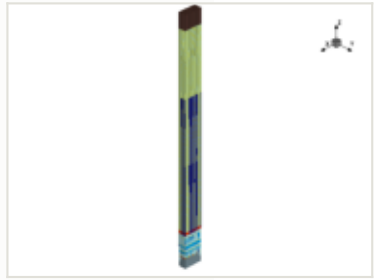

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

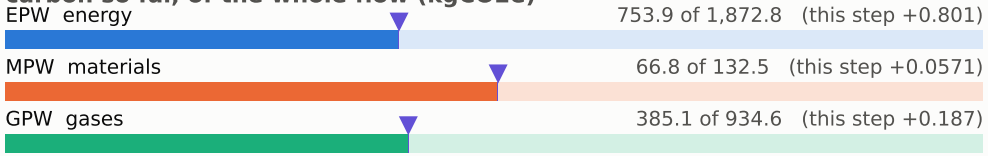

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

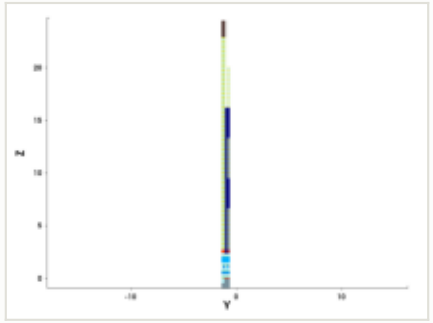

y cut at -1.035 µm

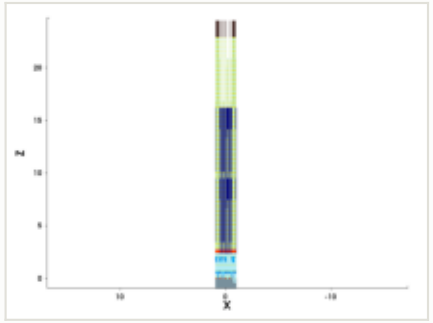

mask for this step

no mask for this step

steps by process area

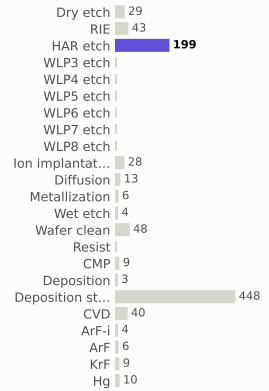

materials deposited (g)

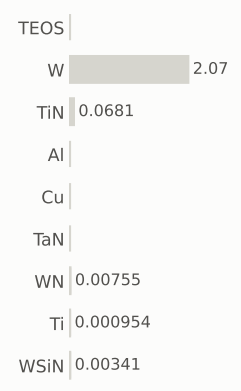

gases emitted (g)

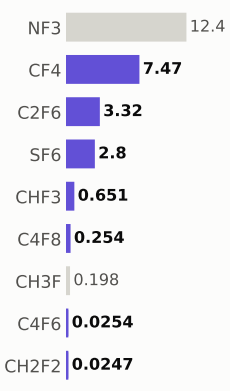

Step #11626.5772: HAR_etch

etch_noop · HAR_etch

1.04	1,206.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

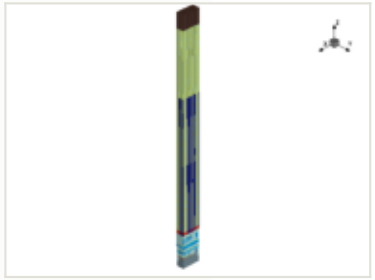

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

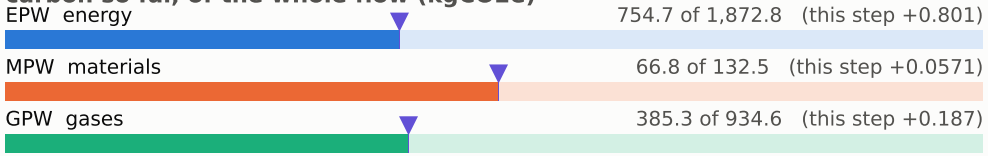

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

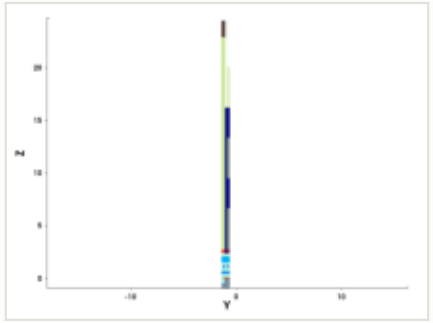

y cut at -1.035 µm

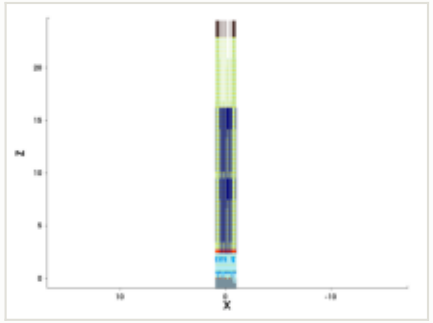

mask for this step

no mask for this step

steps by process area

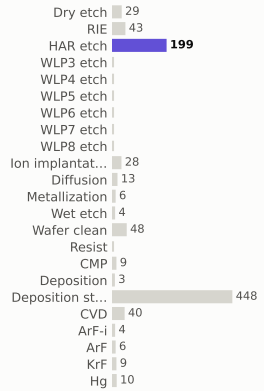

materials deposited (g)

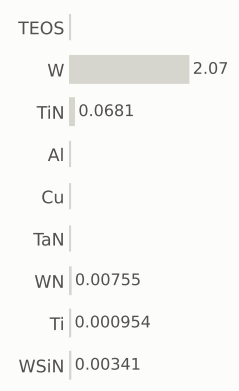

gases emitted (g)

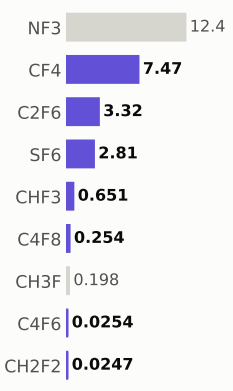

Step #11626.6443: HAR_etch

etch_noop · HAR_etch

1.04	1,207.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

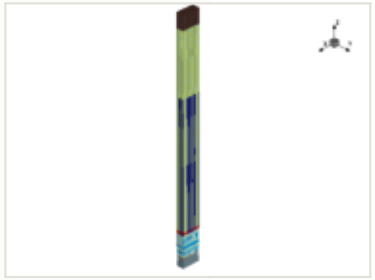

x cut at 0.000 µm

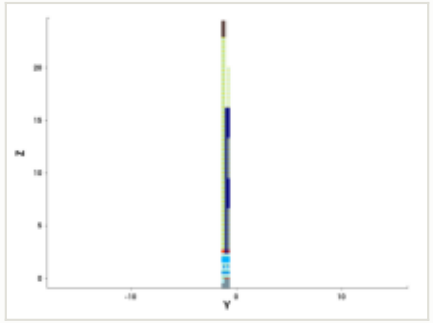

y cut at -1.035 µm

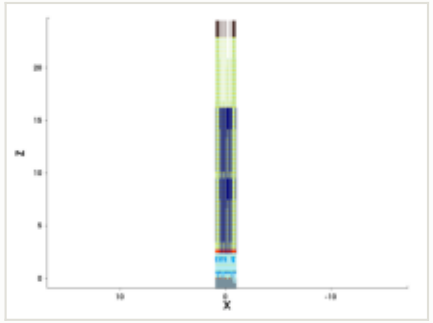

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

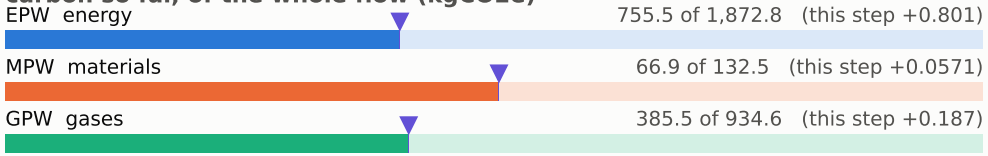

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

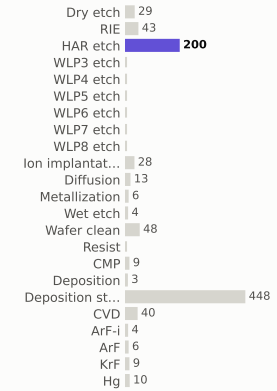

materials deposited (g)

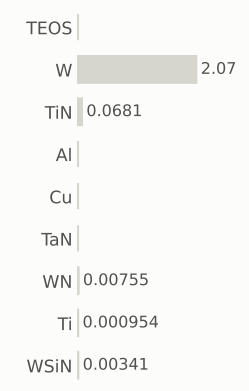

gases emitted (g)

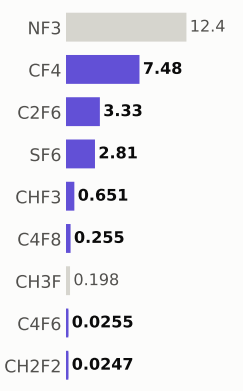

Step #11626.7114: HAR_etch

etch_noop · HAR_etch

1.04	1,208.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

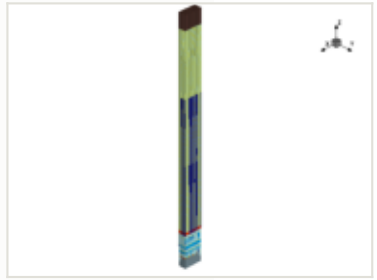

x cut at 0.000 µm

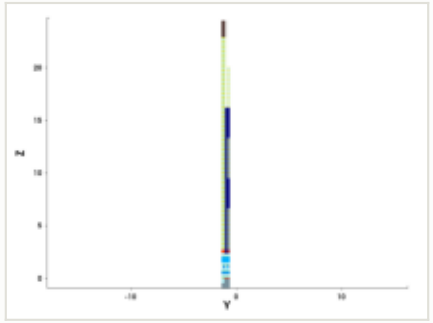

y cut at -1.035 µm

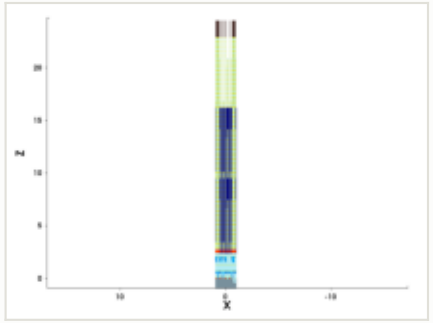

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

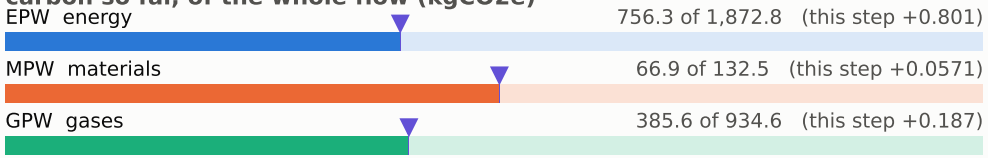

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

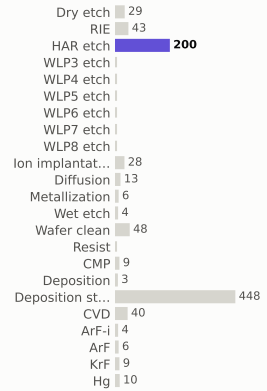

materials deposited (g)

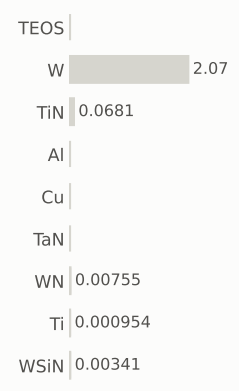

gases emitted (g)

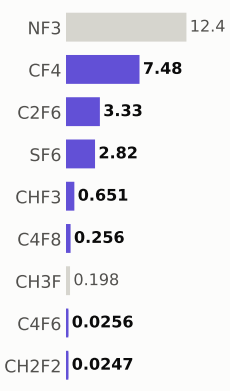

Step #11626.7785: HAR_etch

etch_noop · HAR_etch

1.04	1,209.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

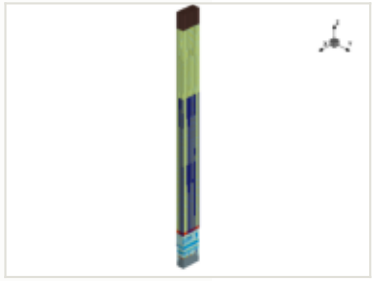

x cut at 0.000 µm

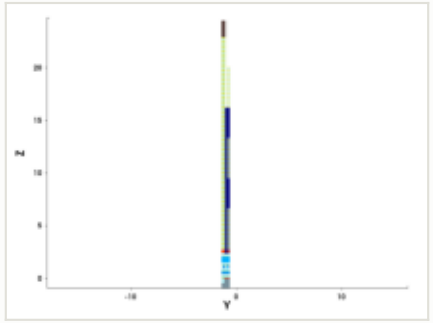

y cut at -1.035 µm

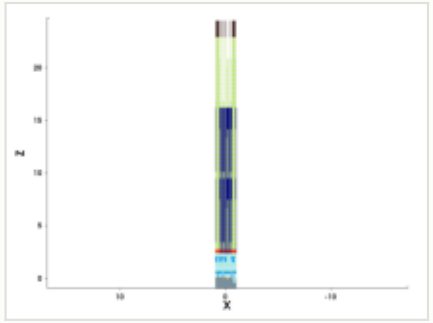

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

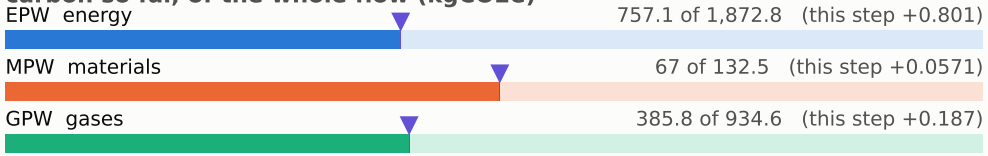

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

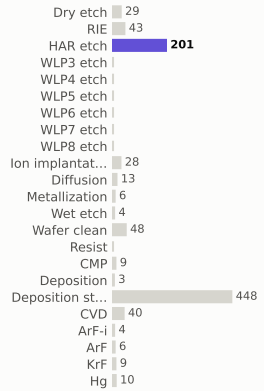

materials deposited (g)

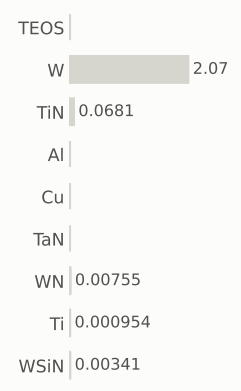

gases emitted (g)

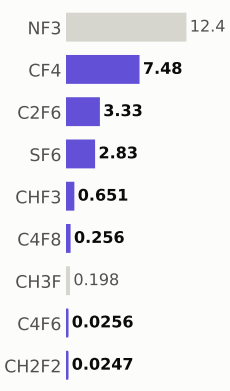

Step #11626.8456: HAR_etch

etch_noop · HAR_etch

1.04	1,210.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

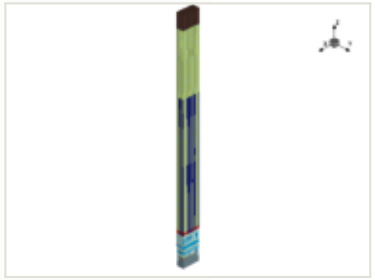

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

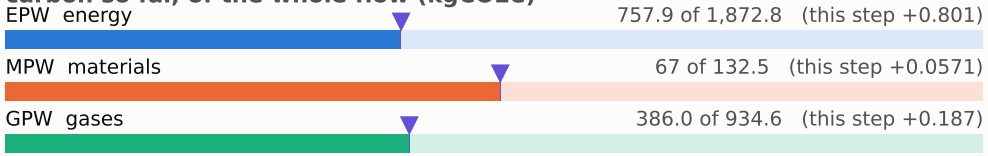

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

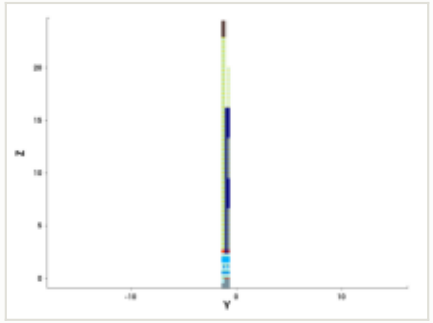

y cut at -1.035 µm

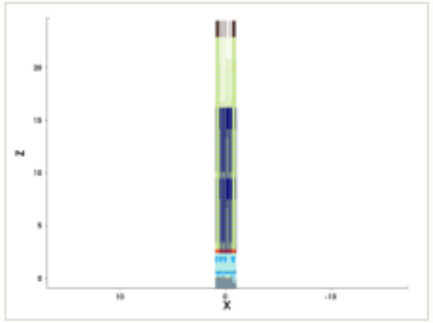

mask for this step

no mask for this step

steps by process area

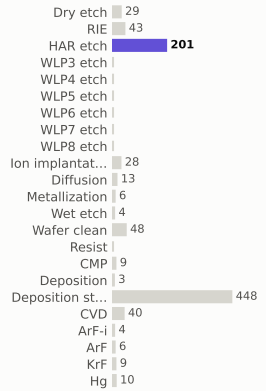

materials deposited (g)

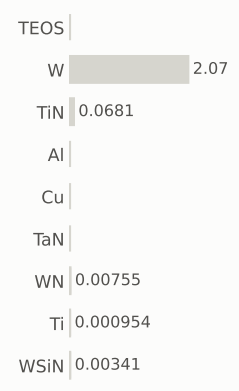

gases emitted (g)

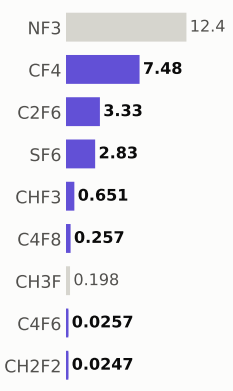

Step #11626.9128: HAR_etch

etch_noop · HAR_etch

1.04	1,212.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

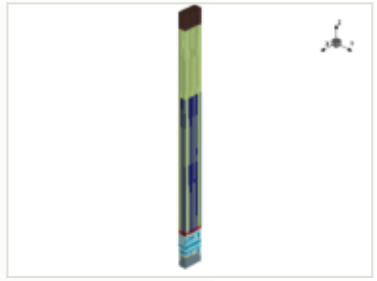

x cut at 0.000 µm

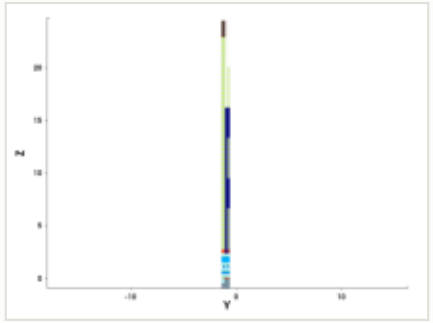

y cut at -1.035 µm

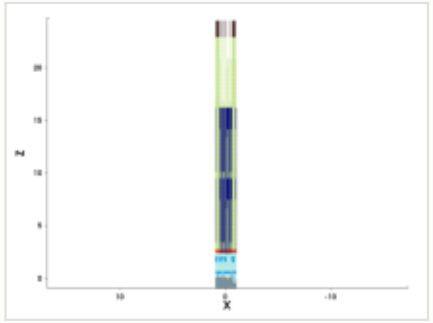

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

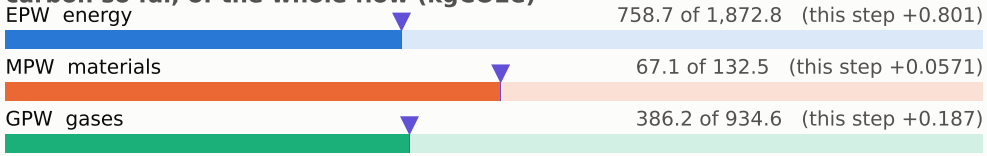

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

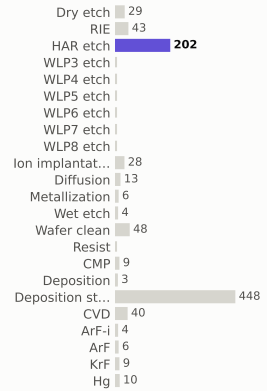

materials deposited (g)

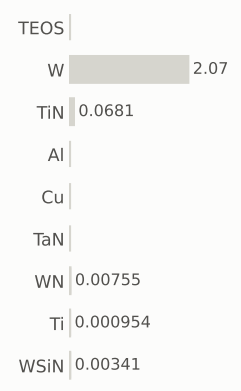

gases emitted (g)

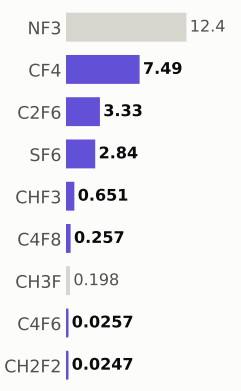

Step #11626.9799: HAR_etch

etch_noop · HAR_etch

1.04	1,213.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

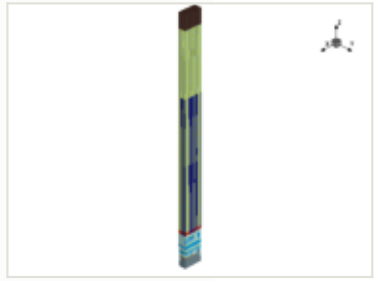

x cut at 0.000 µm

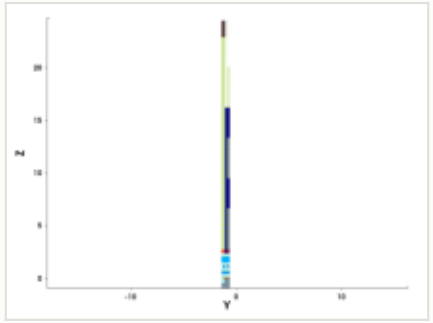

y cut at -1.035 µm

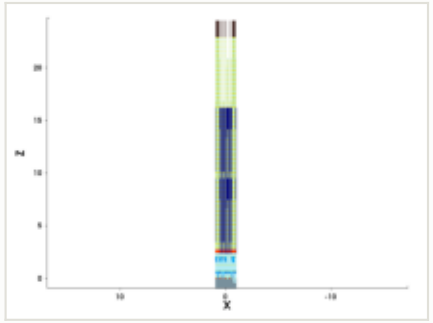

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

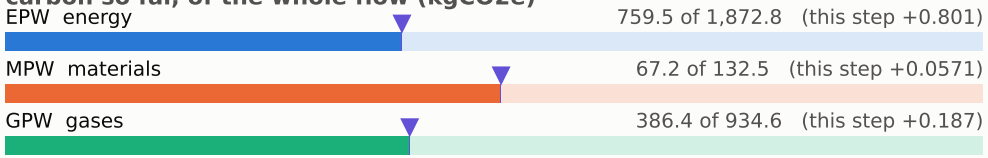

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

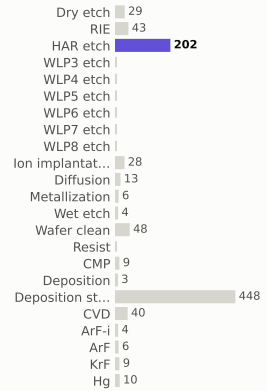

materials deposited (g)

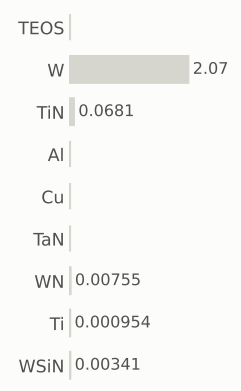

gases emitted (g)

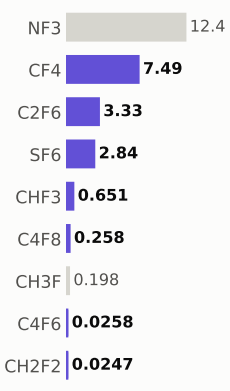

Step #11627.047: HAR_etch

etch_noop · HAR_etch

1.04	1,214.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

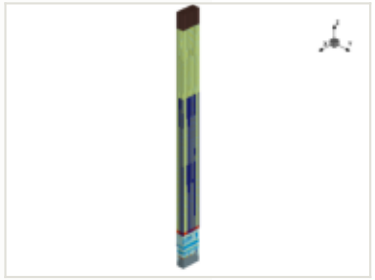

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

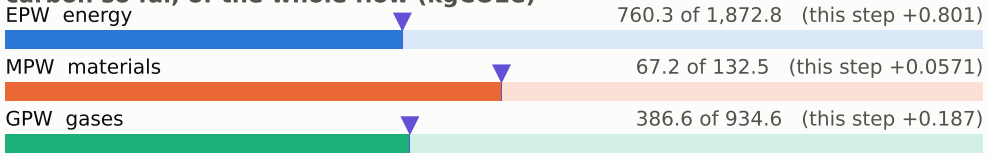

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

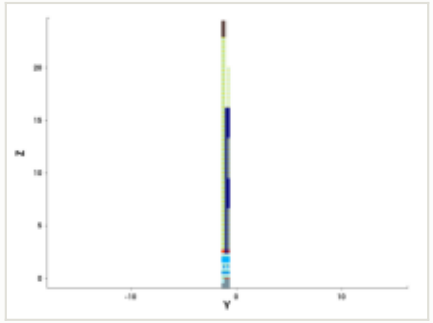

y cut at -1.035 µm

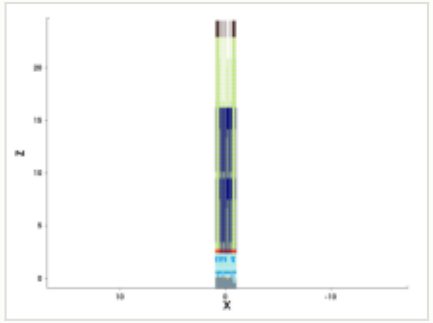

mask for this step

no mask for this step

steps by process area

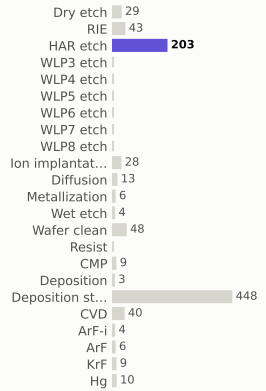

materials deposited (g)

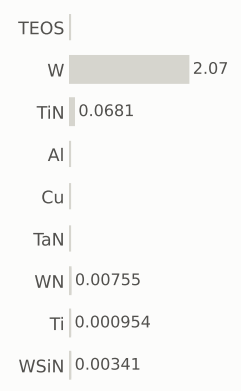

gases emitted (g)

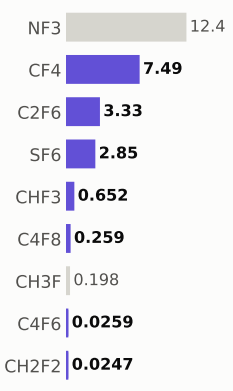

Step #11627.1141: HAR_etch

etch_noop · HAR_etch

1.04	1,215.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

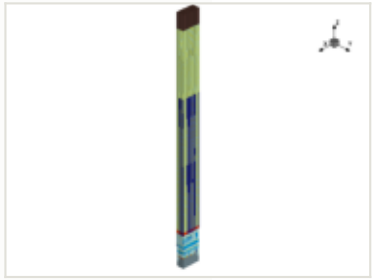

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

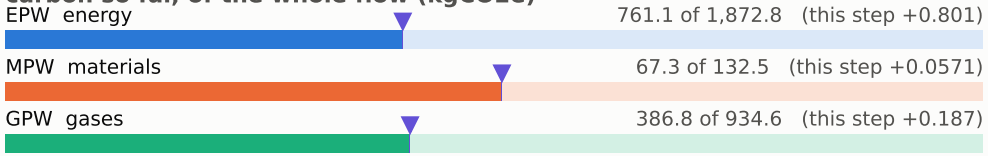

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

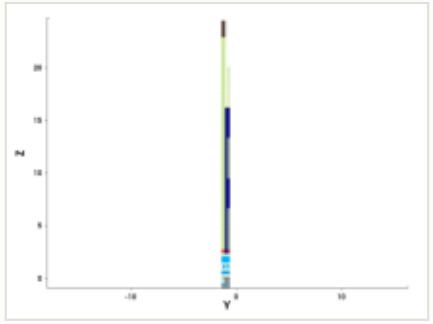

y cut at -1.035 µm

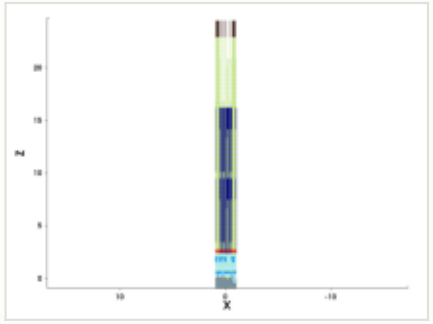

mask for this step

no mask for this step

steps by process area

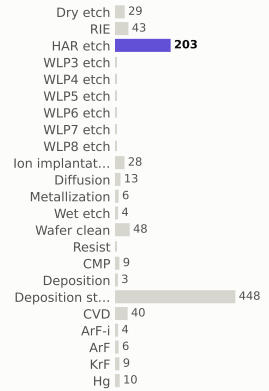

materials deposited (g)

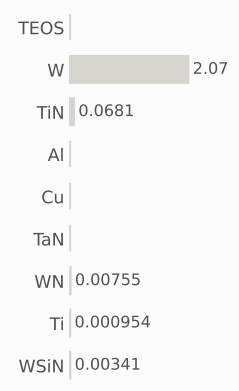

gases emitted (g)

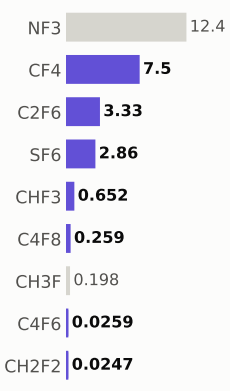

Step #11627.1812: HAR_etch

etch_noop · HAR_etch

1.04	1,216.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

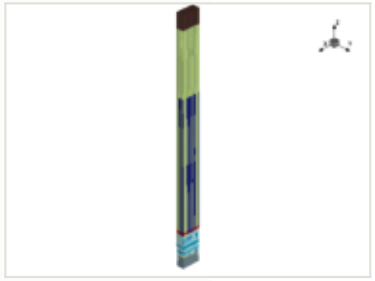

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

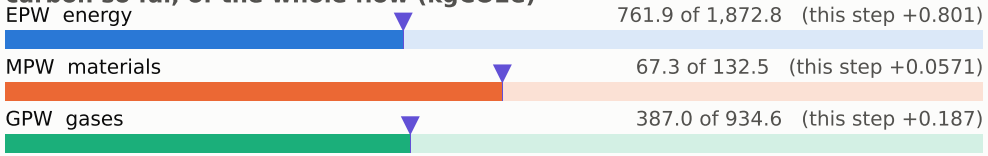

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

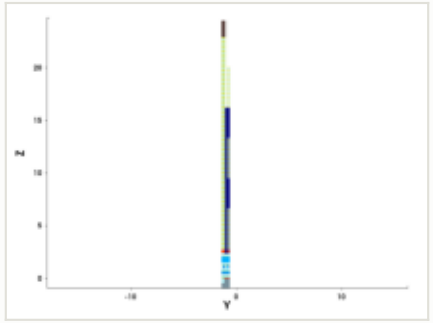

y cut at -1.035 µm

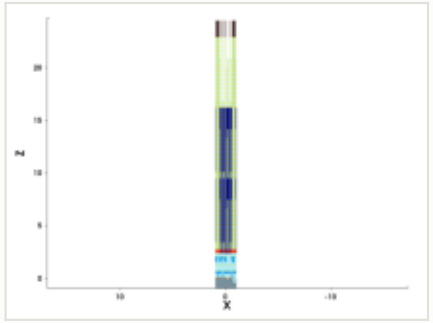

mask for this step

no mask for this step

steps by process area

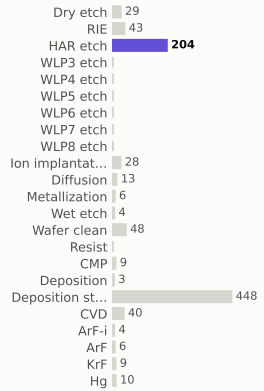

materials deposited (g)

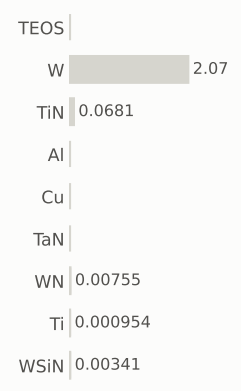

gases emitted (g)

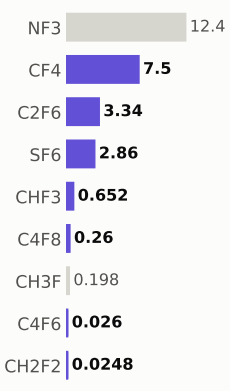

Step #11627.2483: HAR_etch

etch_noop · HAR_etch

1.04	1,217.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

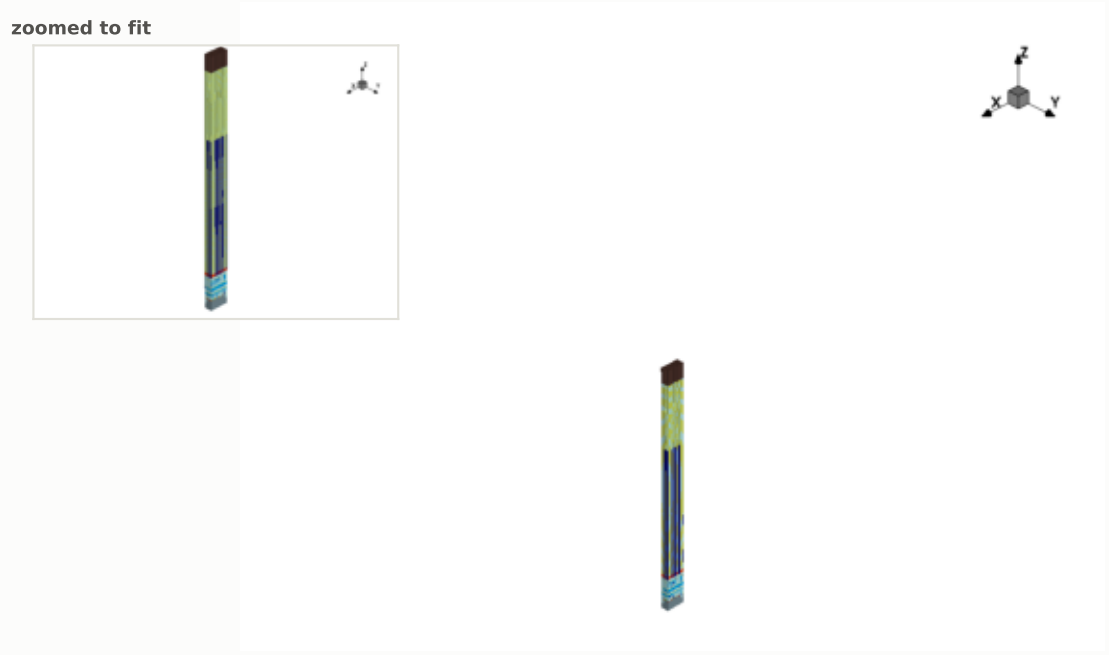

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

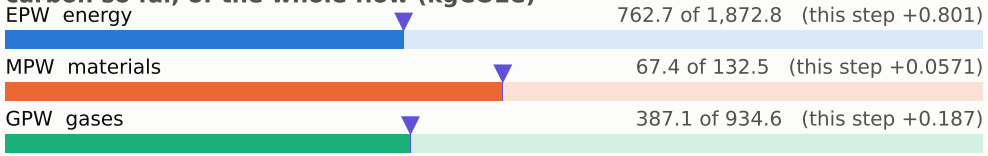

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

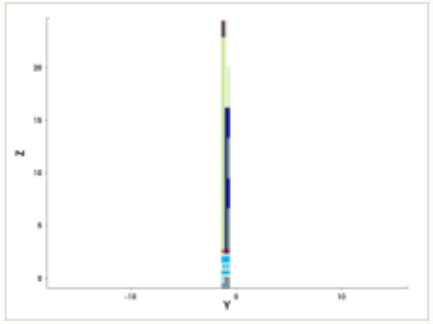

y cut at -1.035 µm

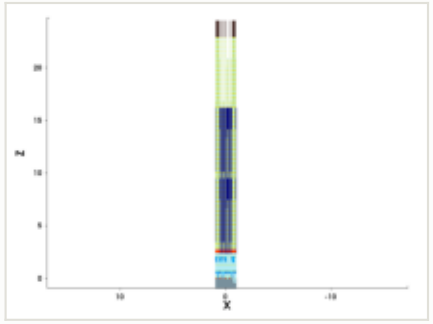

mask for this step

no mask for this step

steps by process area

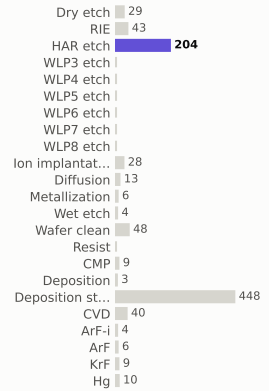

materials deposited (g)

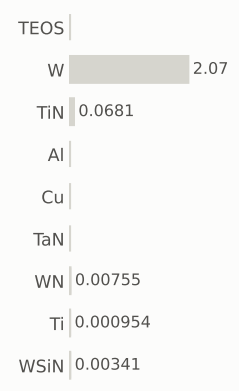

gases emitted (g)

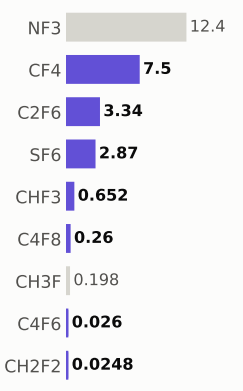

Step #11627.3154: HAR_etch

etch_noop · HAR_etch

1.04	1,218.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

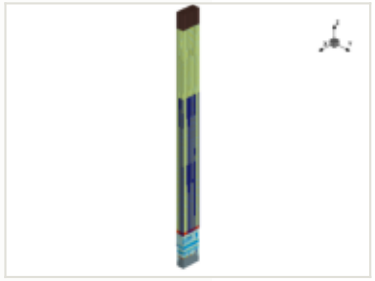

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

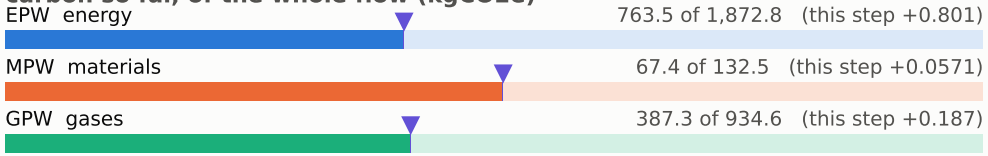

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

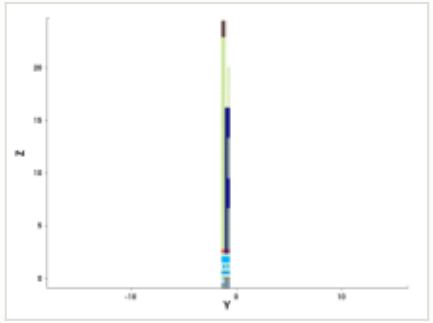

y cut at -1.035 µm

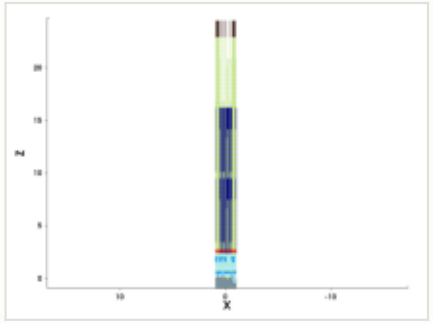

mask for this step

no mask for this step

steps by process area

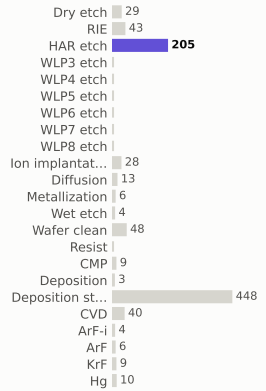

materials deposited (g)

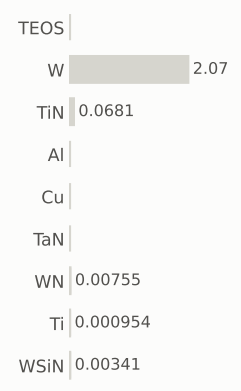

gases emitted (g)

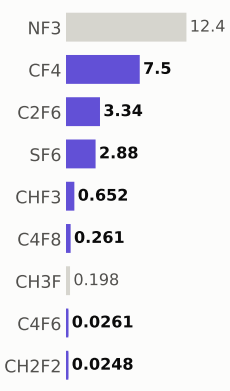

Step #11627.3826: HAR_etch

etch_noop · HAR_etch

1.04	1,219.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

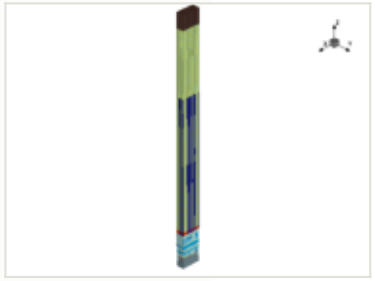

x cut at 0.000 µm

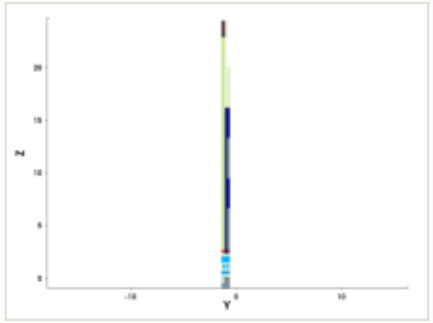

y cut at -1.035 µm

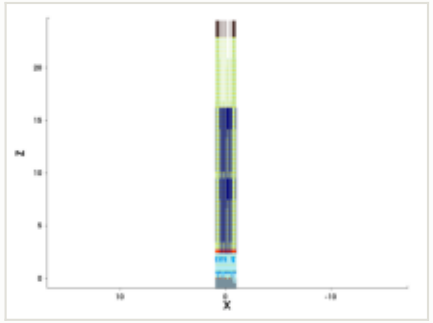

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

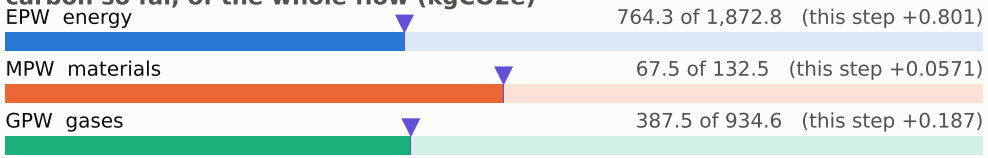

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

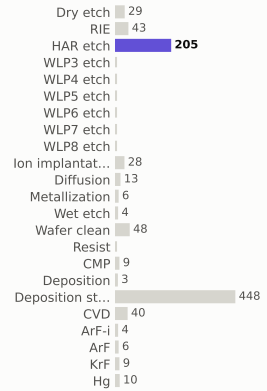

materials deposited (g)

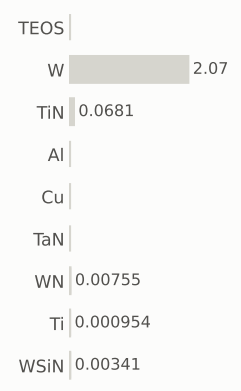

gases emitted (g)

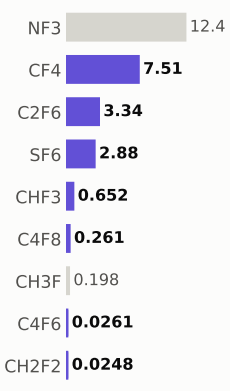

Step #11627.4497: HAR_etch

etch_noop · HAR_etch

1.04	1,220.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

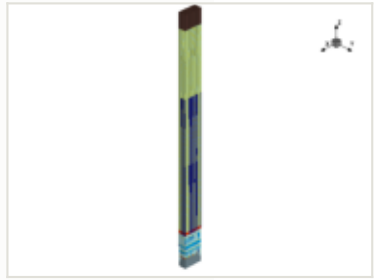

x cut at 0.000 µm

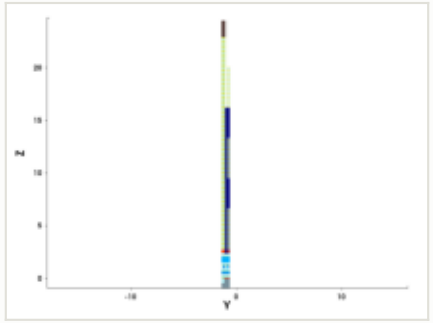

y cut at -1.035 µm

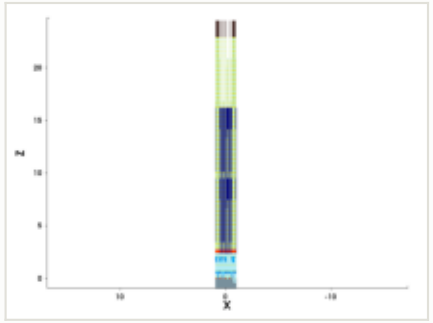

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

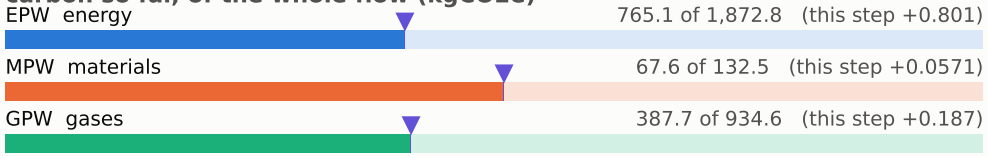

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

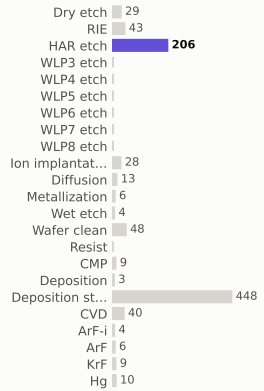

materials deposited (g)

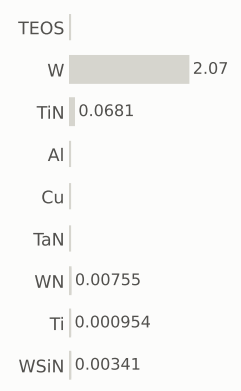

gases emitted (g)

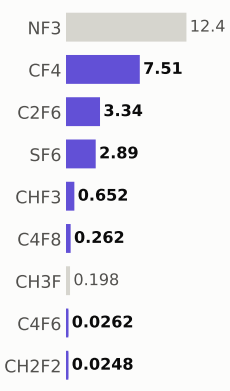

Step #11627.5168: HAR_etch

etch_noop · HAR_etch

1.04	1,221.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

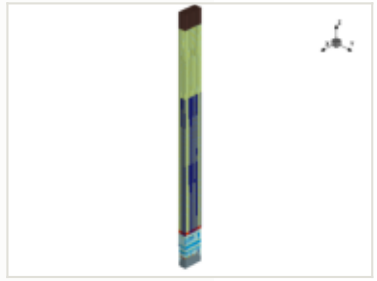

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

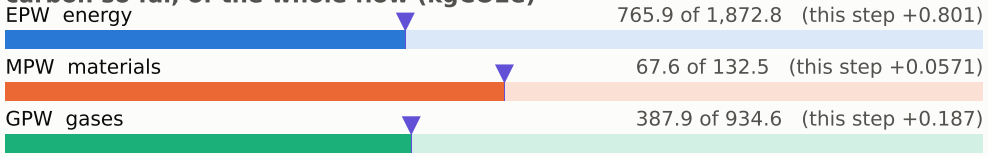

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

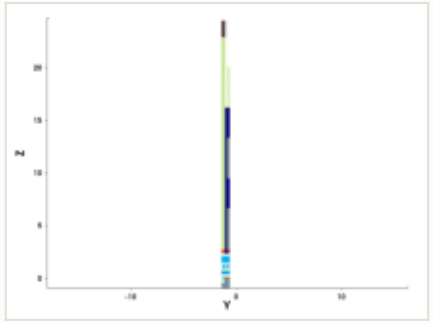

y cut at -1.035 µm

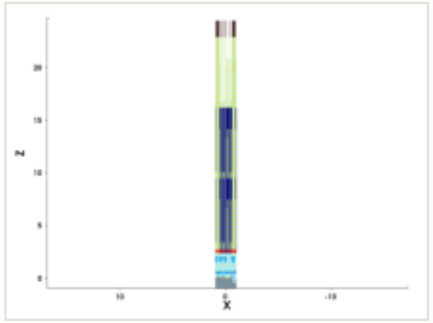

mask for this step

no mask for this step

steps by process area

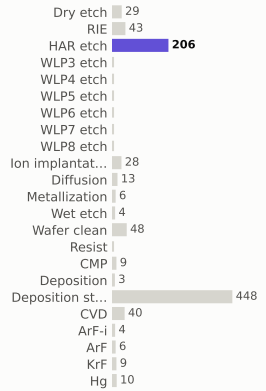

materials deposited (g)

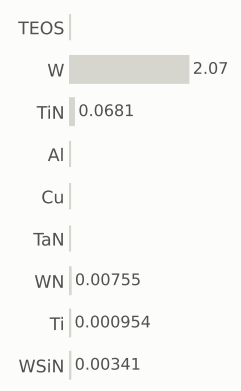

gases emitted (g)

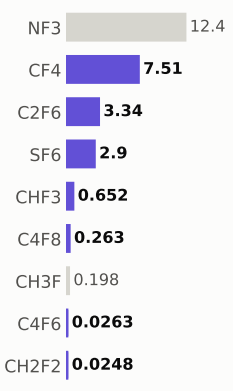

Step #11627.5839: HAR_etch

etch_noop · HAR_etch

1.04	1,222.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

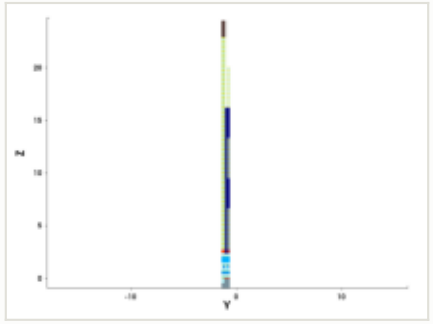

y cut at -1.035 µm

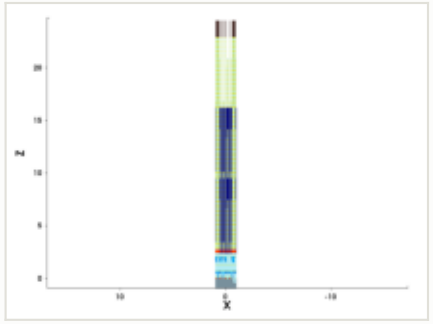

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

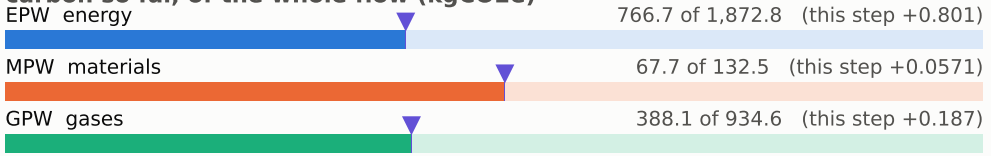

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

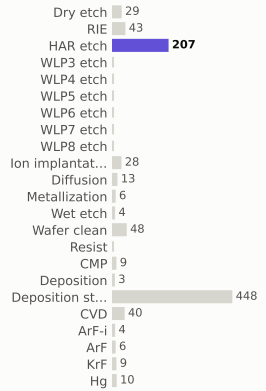

materials deposited (g)

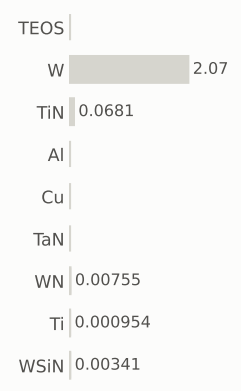

gases emitted (g)

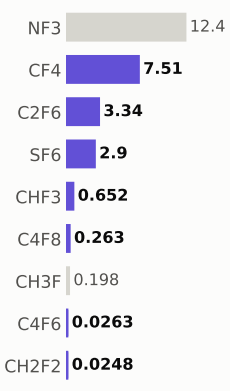

Step #11627.651: HAR_etch

etch_noop · HAR_etch

1.04	1,223.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

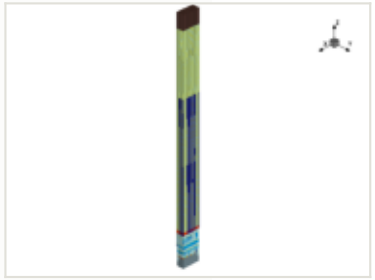

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

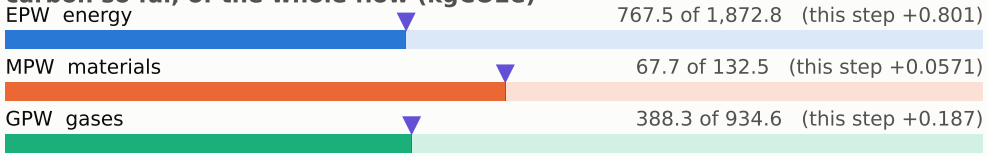

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

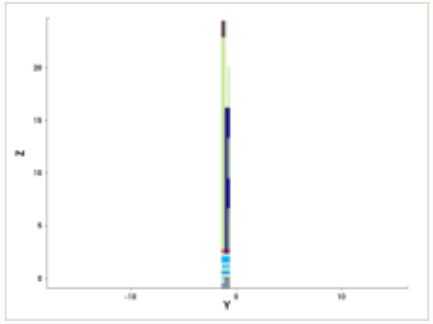

y cut at -1.035 µm

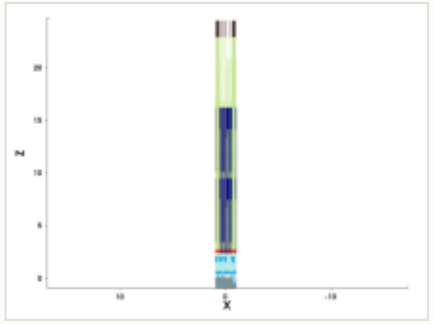

mask for this step

no mask for this step

steps by process area

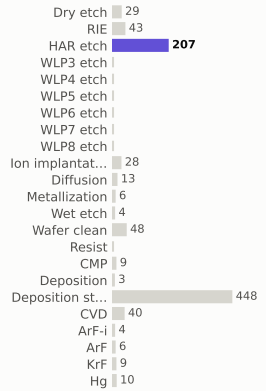

materials deposited (g)

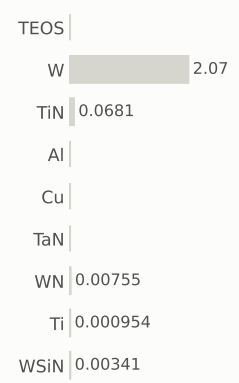

gases emitted (g)

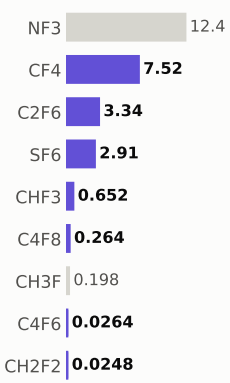

Step #11627.7181: HAR_etch

etch_noop · HAR_etch

1.04	1,224.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

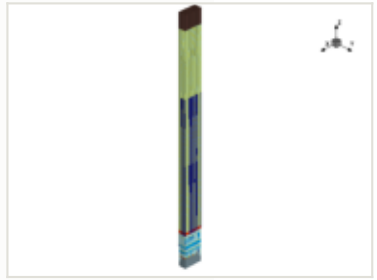



x cut at 0.000 µm

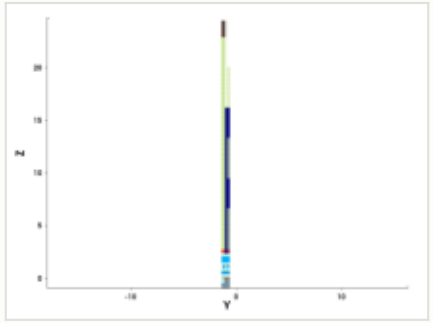

y cut at -1.035 µm

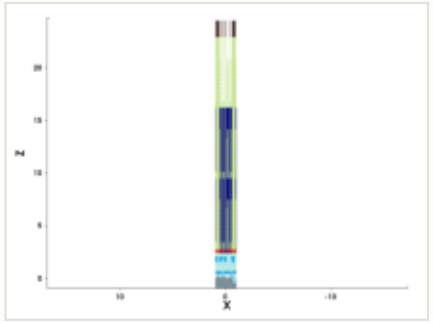

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

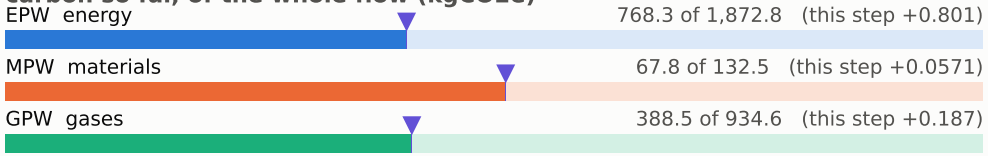

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

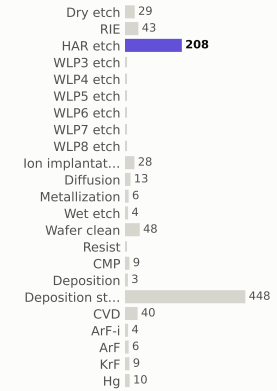

materials deposited (g)

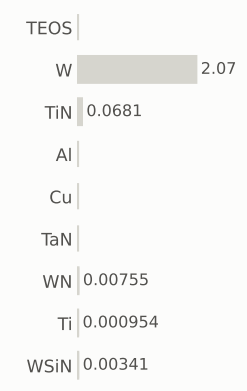

gases emitted (g)

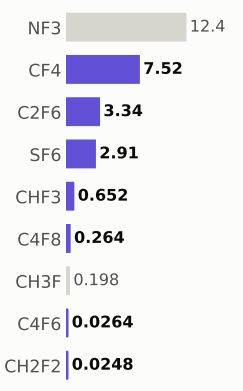

Step #11627.7852: HAR_etch

etch_noop · HAR_etch

1.04	1,225.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

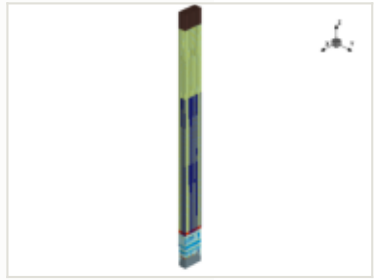

x cut at 0.000 µm

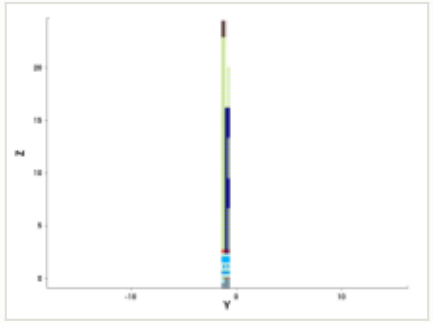

y cut at -1.035 µm

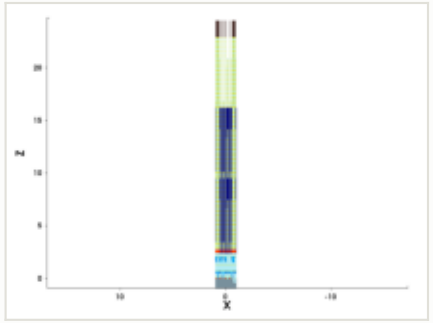

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

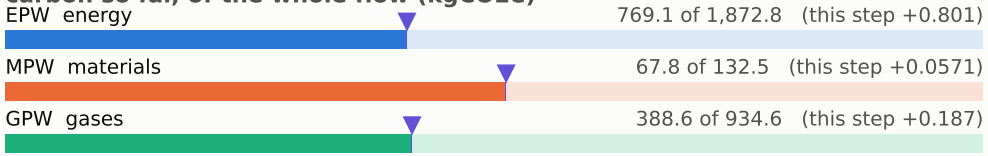

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

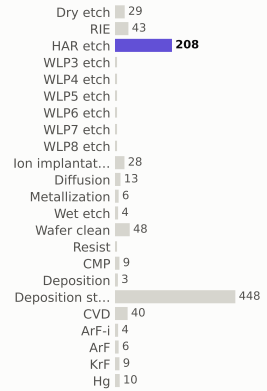

materials deposited (g)

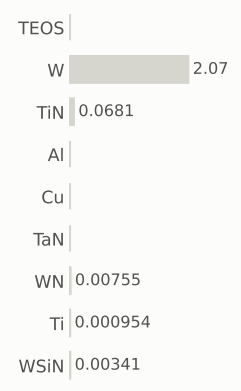

gases emitted (g)

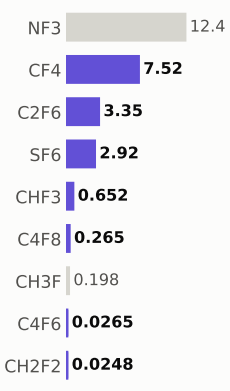

Step #11627.8523: HAR_etch

etch_noop · HAR_etch

1.04	1,226.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

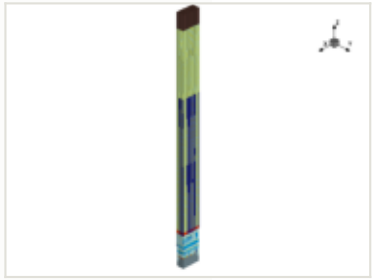

x cut at 0.000 µm

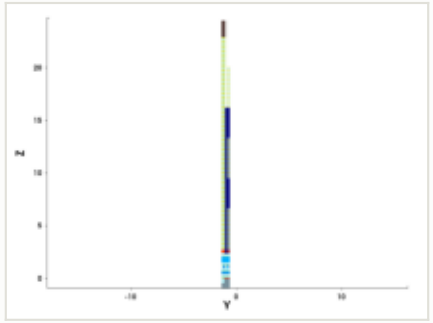

y cut at -1.035 µm

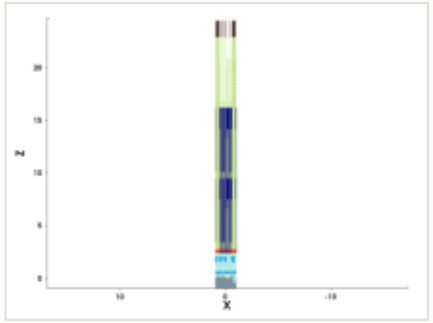

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

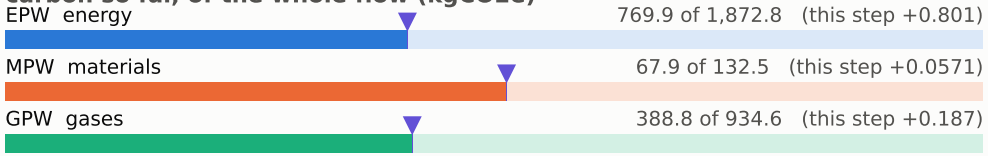

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

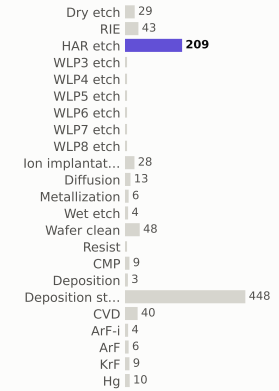

materials deposited (g)

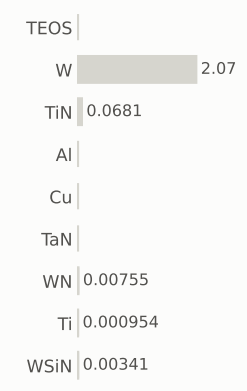

gases emitted (g)

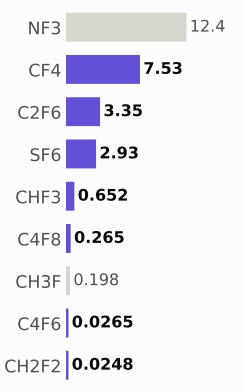

Step #11627.9195: HAR_etch

etch_noop · HAR_etch

1.04	1,227.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

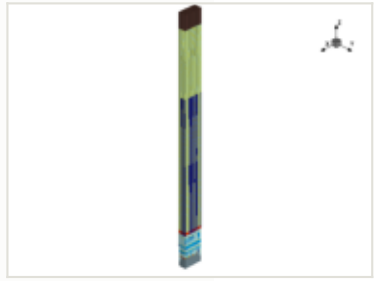

x cut at 0.000 µm

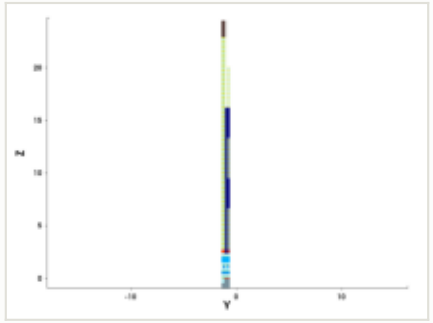

y cut at -1.035 µm

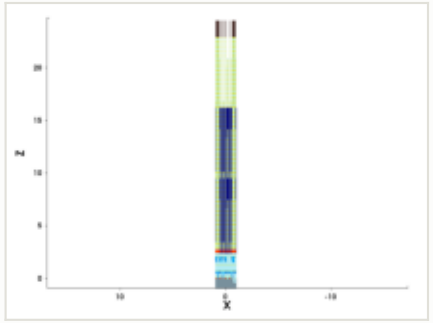

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

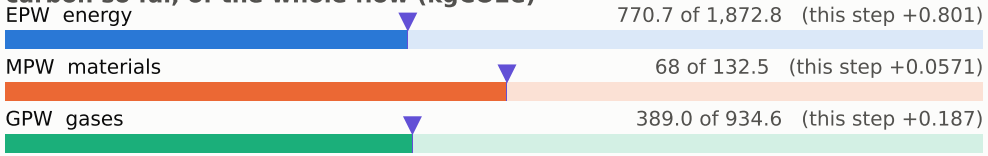

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

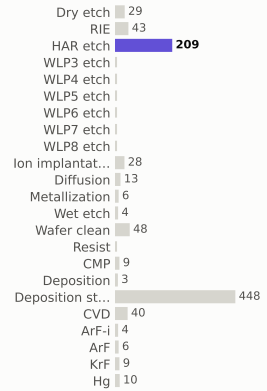

materials deposited (g)

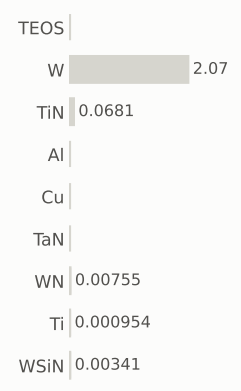

gases emitted (g)

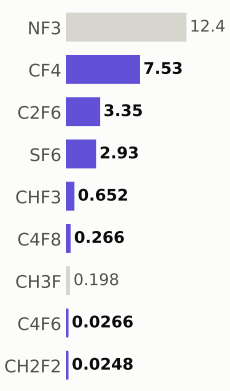

Step #11627.9866: HAR_etch

etch_noop · HAR_etch

1.04	1,228.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

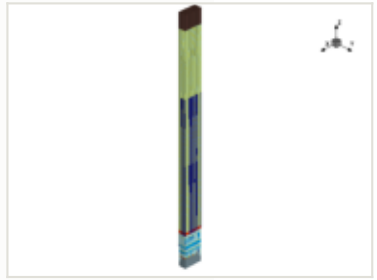

x cut at 0.000 µm

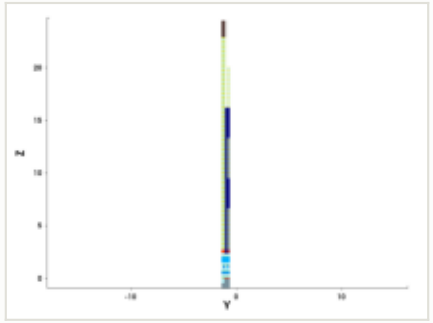

y cut at -1.035 µm

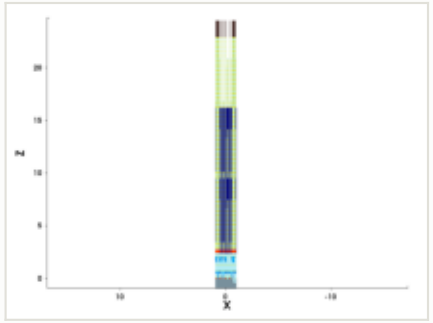

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

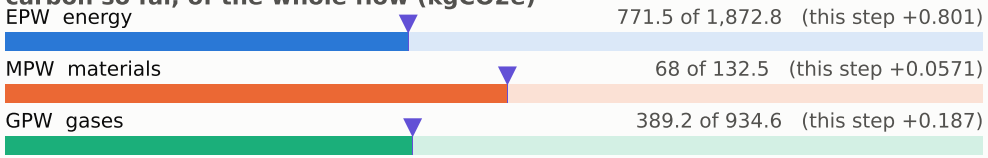

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

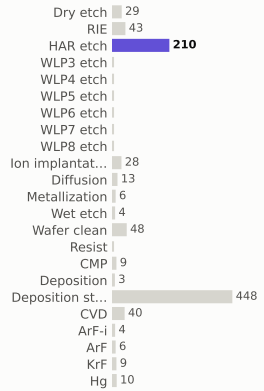

materials deposited (g)

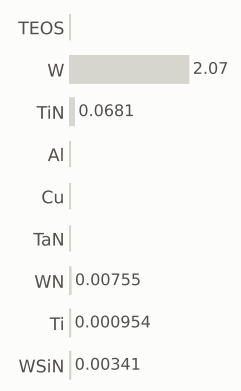

gases emitted (g)

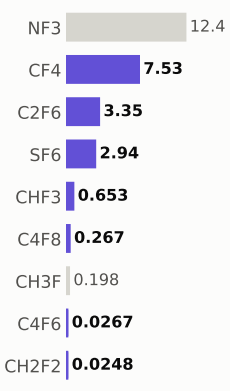

Step #11628.0537: HAR_etch

etch_noop · HAR_etch

1.04	1,229.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

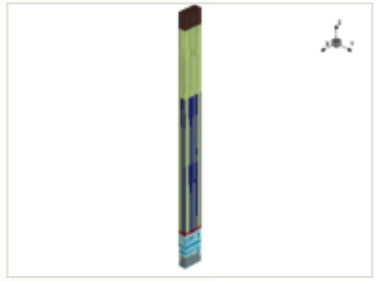

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

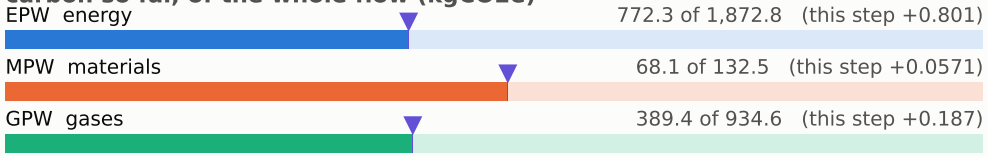

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

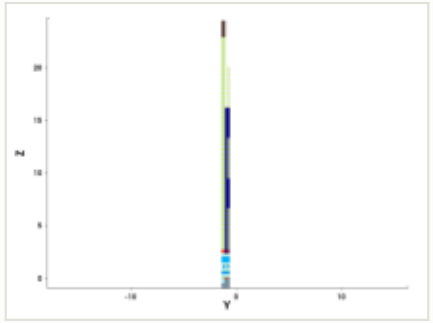

y cut at -1.035 µm

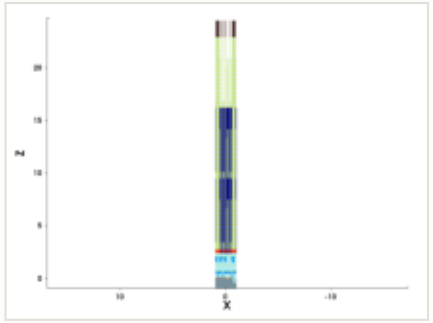

mask for this step

no mask for this step

steps by process area

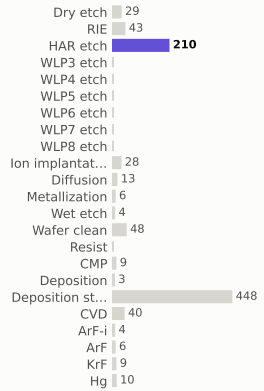

materials deposited (g)

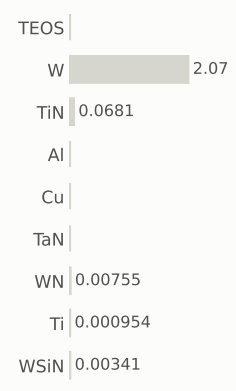

gases emitted (g)

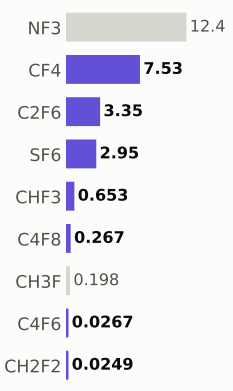

Step #11628.1208: HAR_etch

etch_noop · HAR_etch

1.04	1,230.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

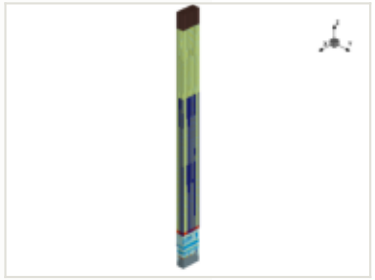

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

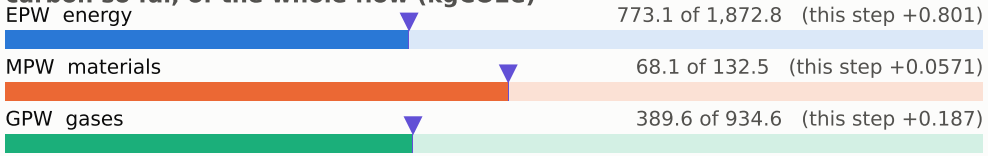

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

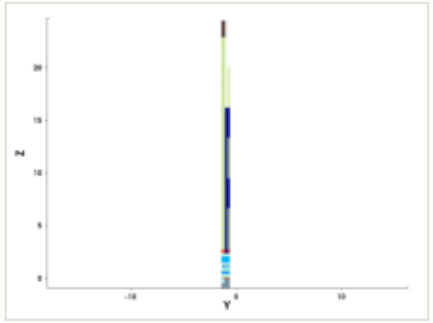

y cut at -1.035 µm

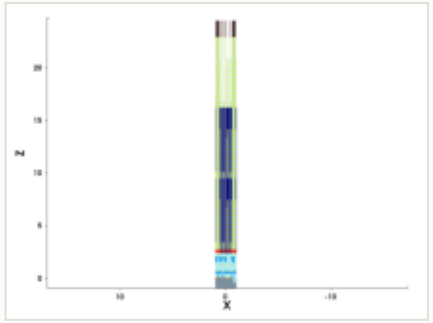

mask for this step

no mask for this step

steps by process area

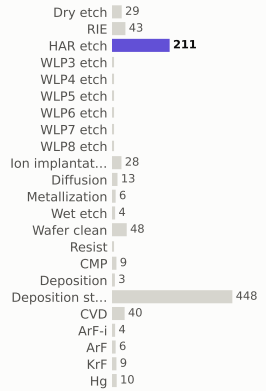

materials deposited (g)

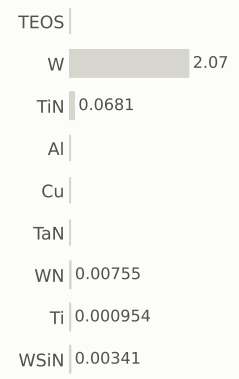

gases emitted (g)

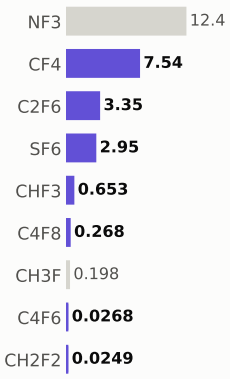

Step #11628.1879: HAR_etch

etch_noop · HAR_etch

1.04	1,231.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

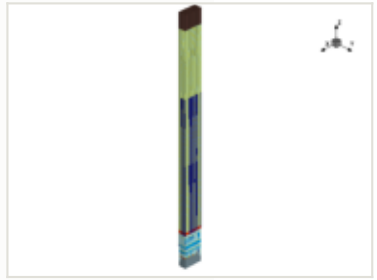

x cut at 0.000 µm

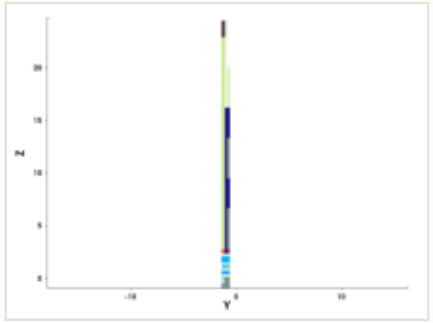

y cut at -1.035 µm

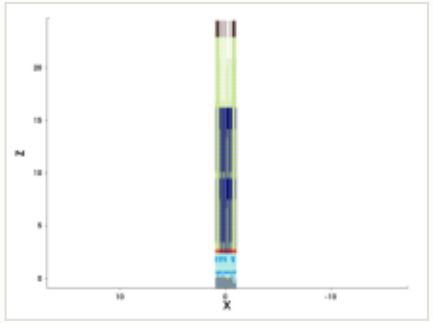

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

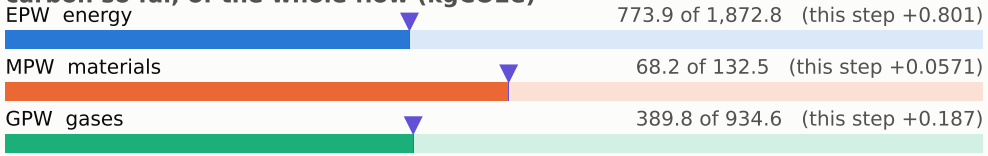

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

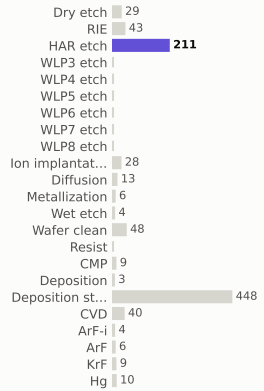

materials deposited (g)

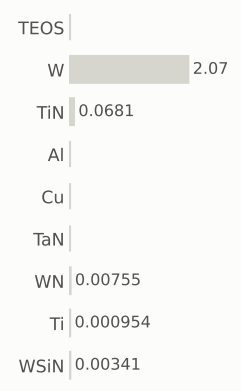

gases emitted (g)

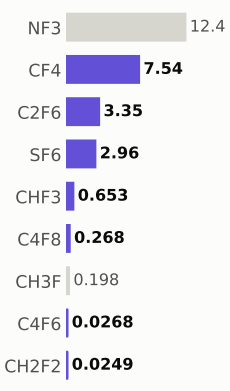

Step #11628.255: HAR_etch

etch_noop · HAR_etch

1.04	1,232.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

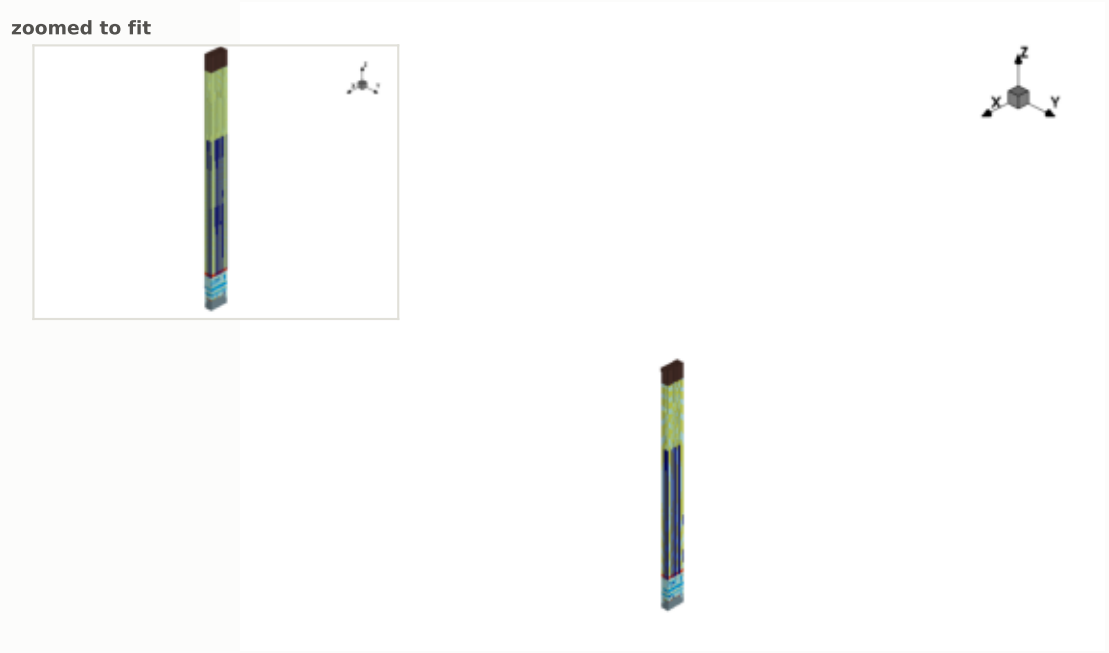

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

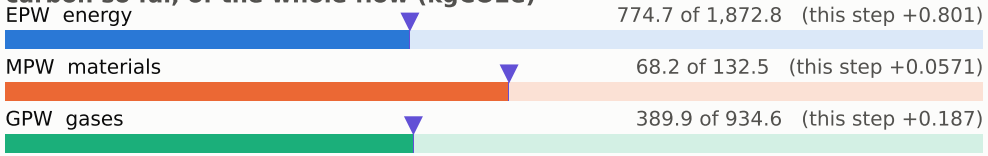

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

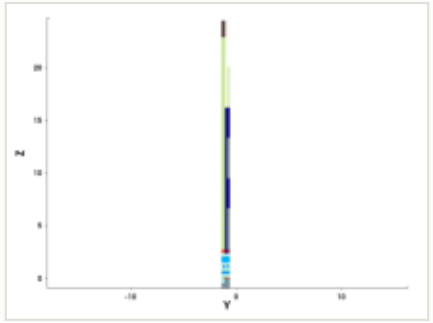

y cut at -1.035 µm

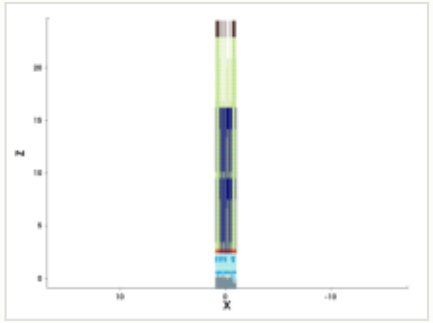

mask for this step

no mask for this step

steps by process area

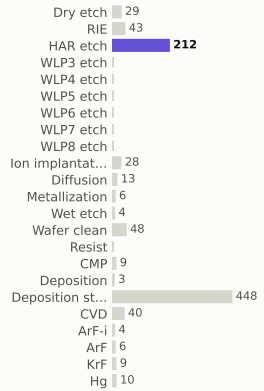

materials deposited (g)

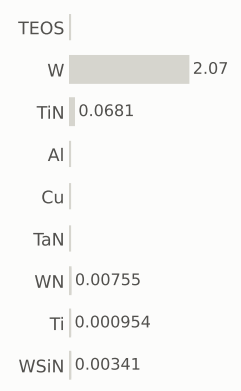

gases emitted (g)

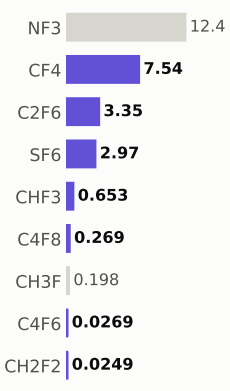

Step #11628.3221: HAR_etch

etch_noop · HAR_etch

1.04	1,233.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

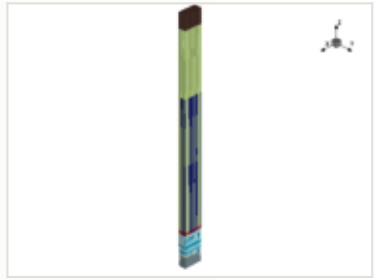

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

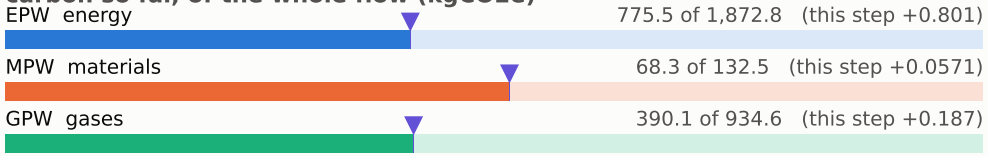

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

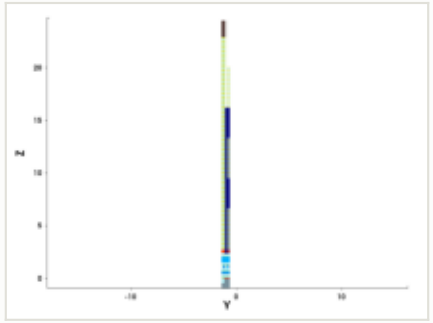

y cut at -1.035 µm

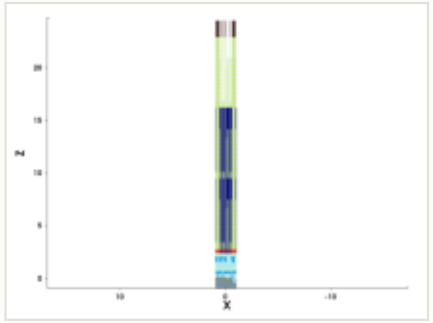

mask for this step

no mask for this step

steps by process area

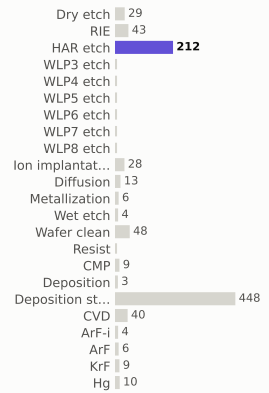

materials deposited (g)



gases emitted (g)



Step #11628.3893: HAR_etch

etch_noop · HAR_etch

1.04	1,235.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

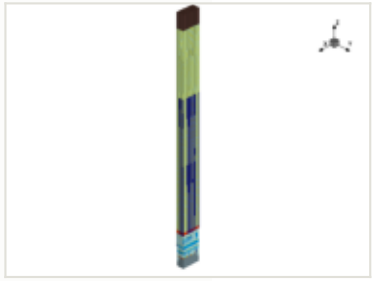

x cut at 0.000 µm

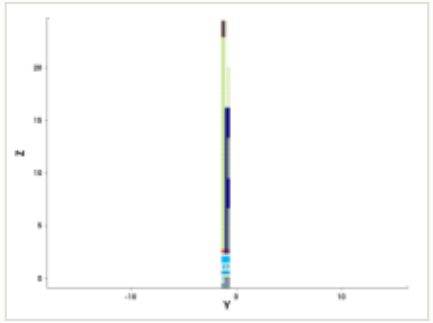

y cut at -1.035 µm

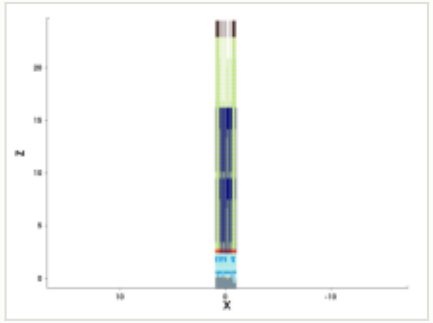

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

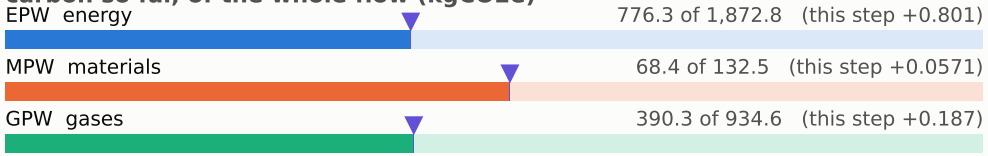

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

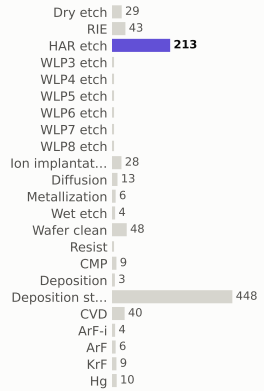

materials deposited (g)

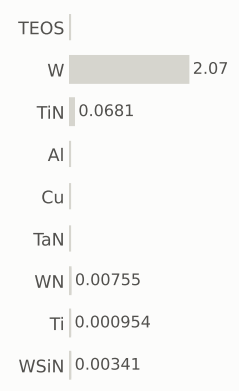

gases emitted (g)

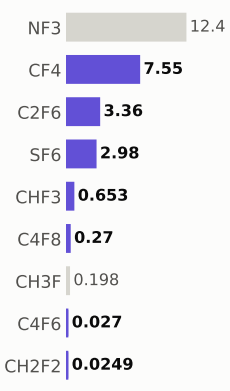

Step #11628.4564: HAR_etch

etch_noop · HAR_etch

1.04	1,236.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

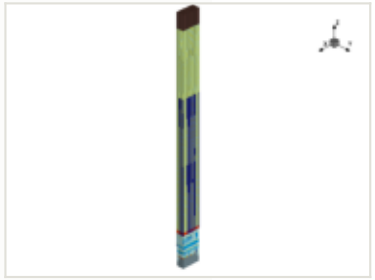

x cut at 0.000 µm

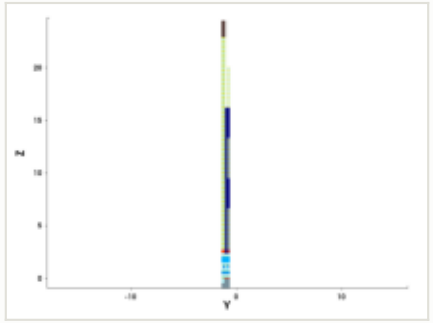

y cut at -1.035 µm

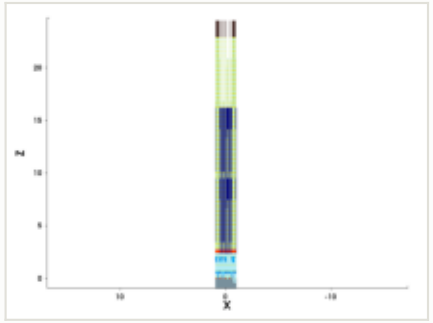

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

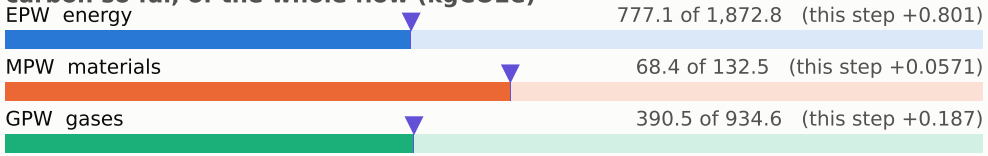

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

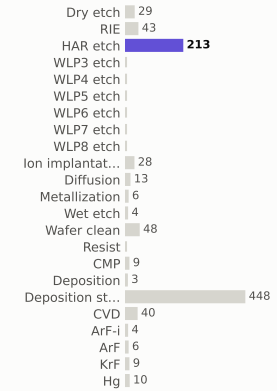

materials deposited (g)

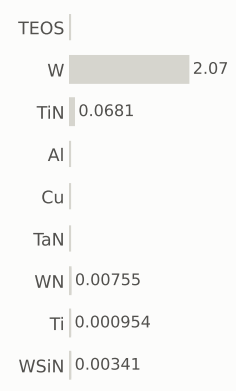

gases emitted (g)

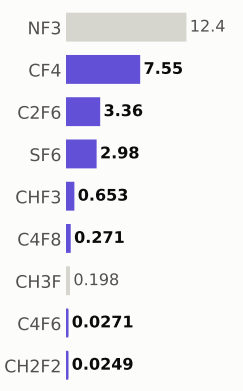

Step #11628.5235: HAR_etch

etch_noop · HAR_etch

1.04	1,237.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

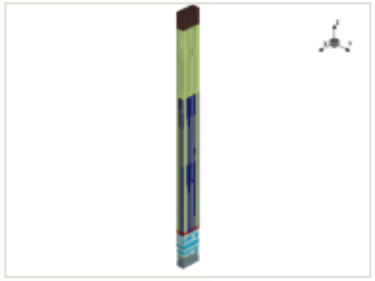

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

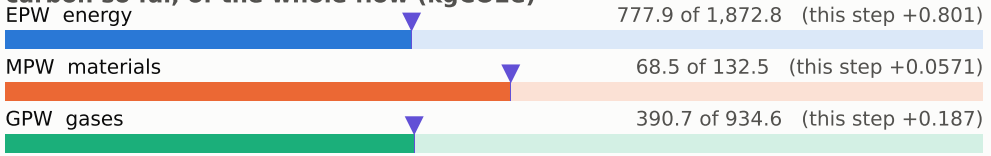

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

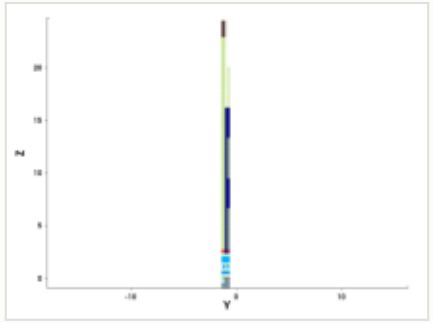

y cut at -1.035 µm

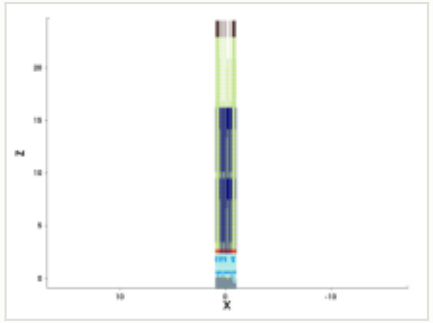

mask for this step

no mask for this step

steps by process area

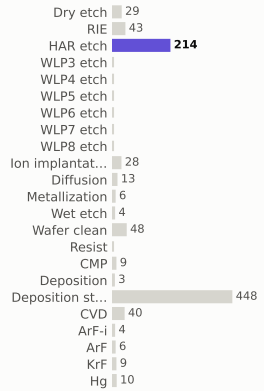

materials deposited (g)

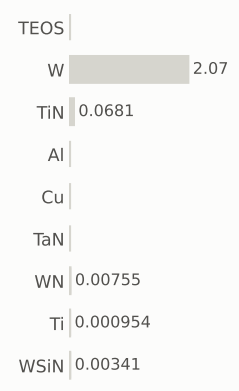

gases emitted (g)

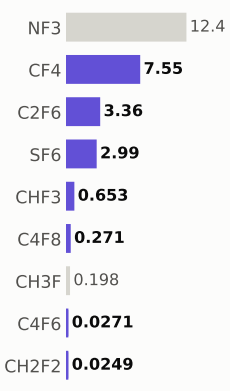

Step #11628.5906: HAR_etch

etch_noop · HAR_etch

1.04	1,238.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

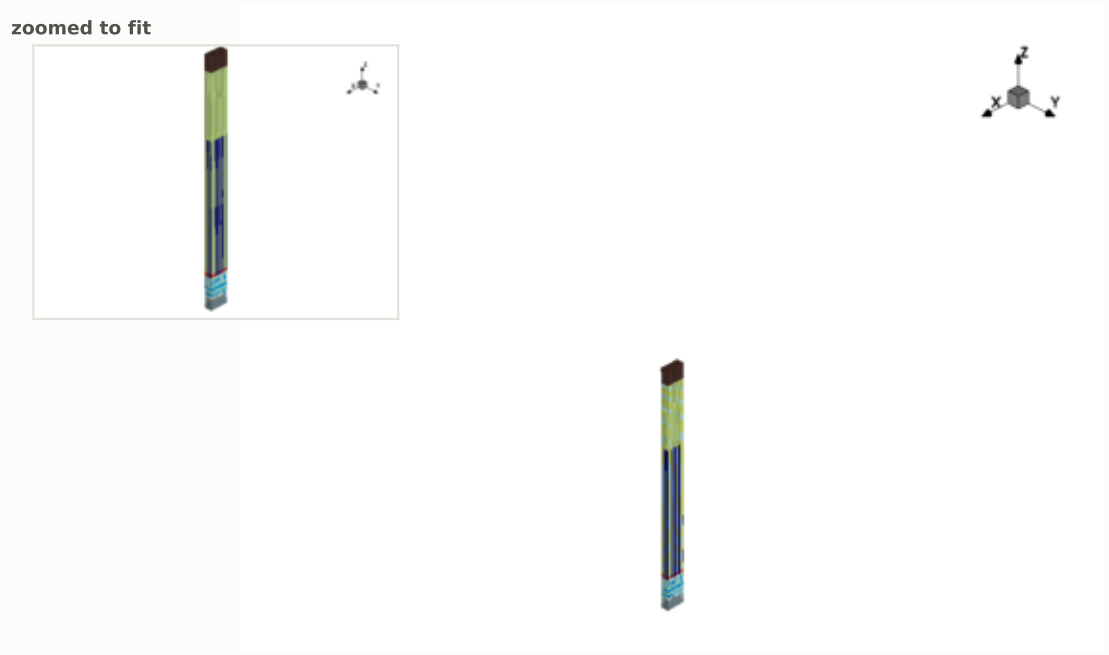

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

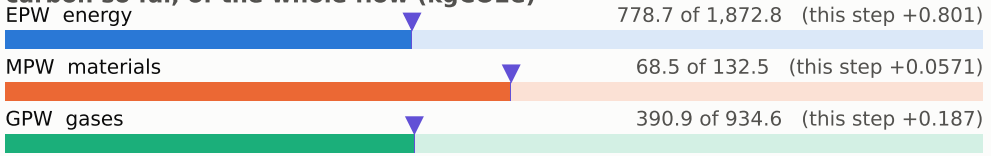

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

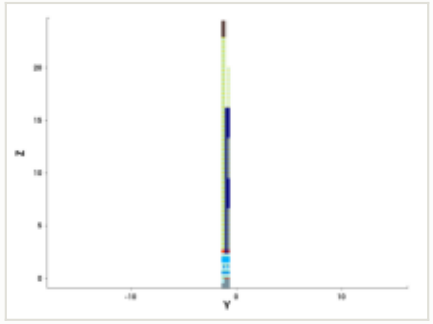

y cut at -1.035 µm

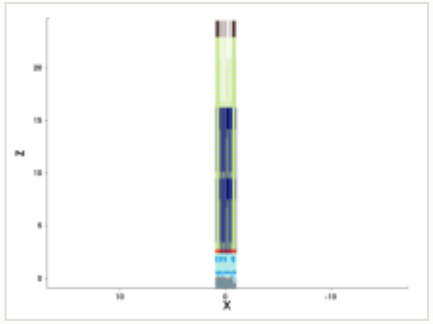

mask for this step

no mask for this step

steps by process area

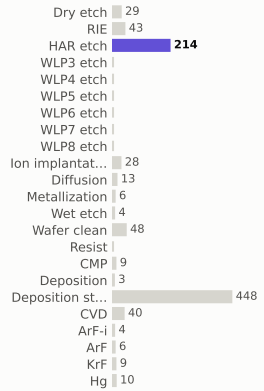

materials deposited (g)

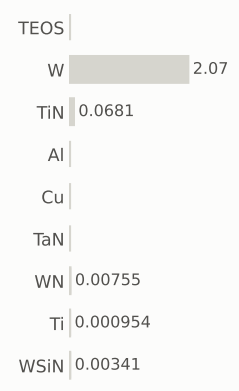

gases emitted (g)

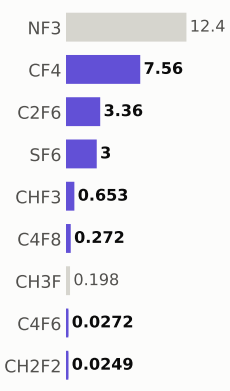

Step #11628.6577: HAR_etch

etch_noop · HAR_etch

1.04	1,239.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

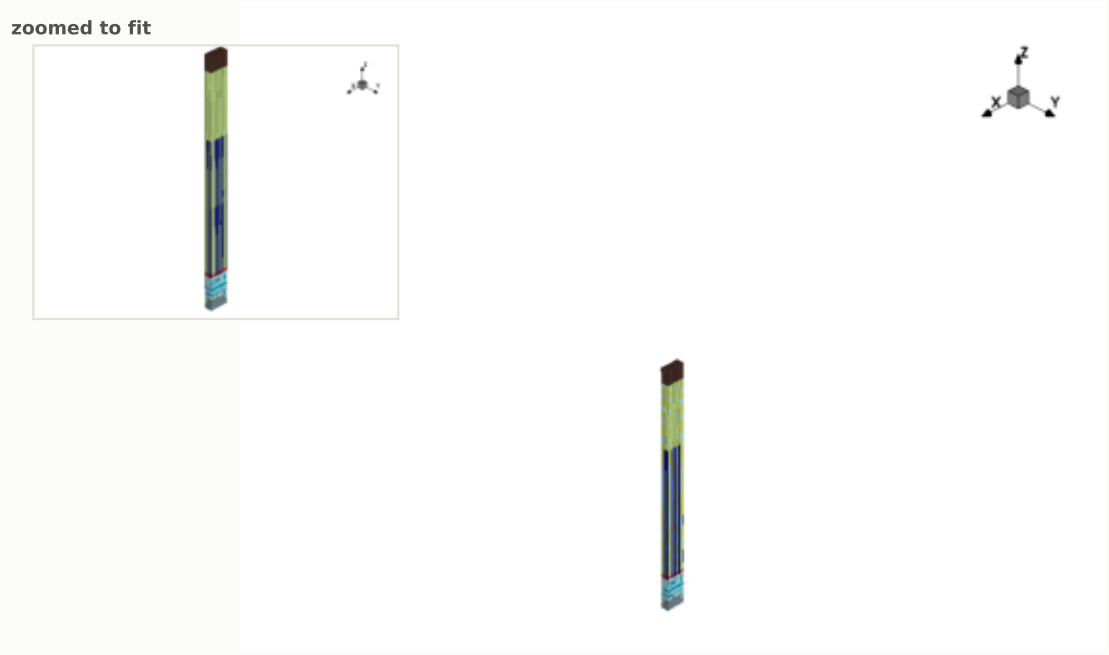

x cut at 0.000 µm

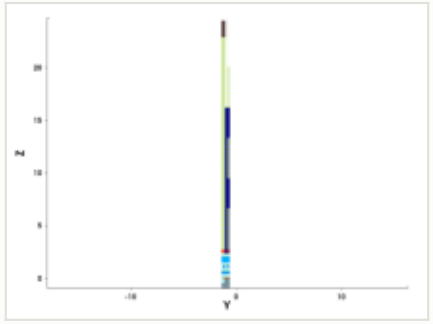

y cut at -1.035 µm

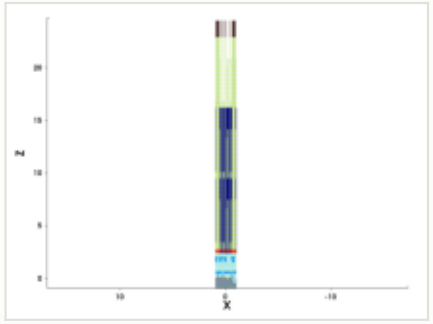

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

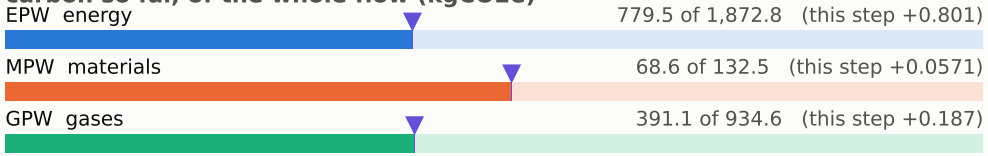

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

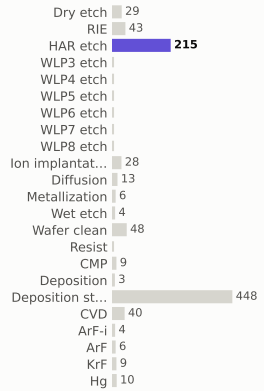

materials deposited (g)

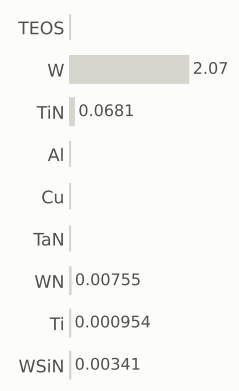

gases emitted (g)

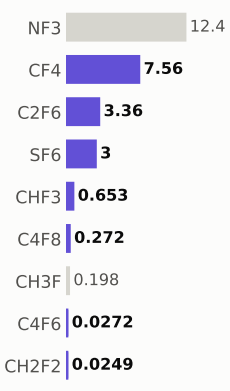

Step #11628.7248: HAR_etch

etch_noop · HAR_etch

1.04	1,240.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

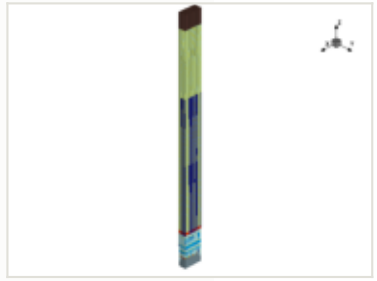

x cut at 0.000 µm

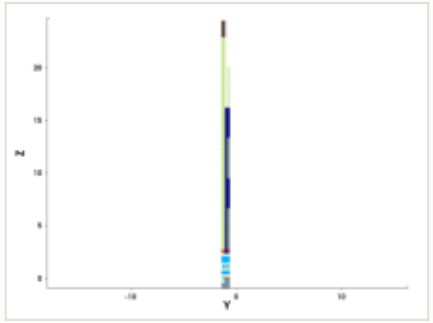

y cut at -1.035 µm

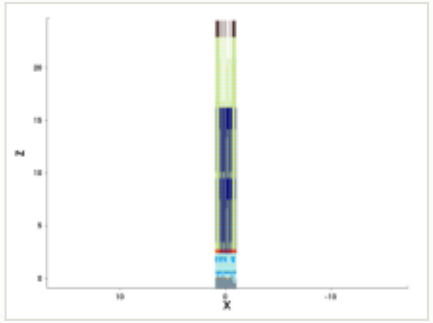

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

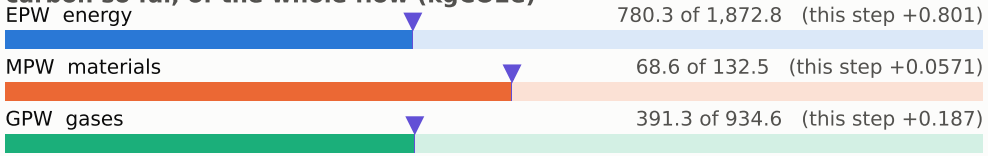

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

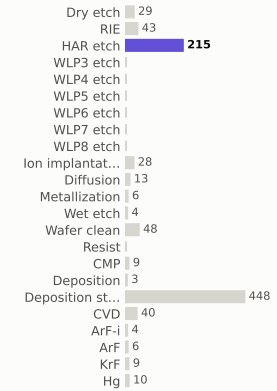

materials deposited (g)

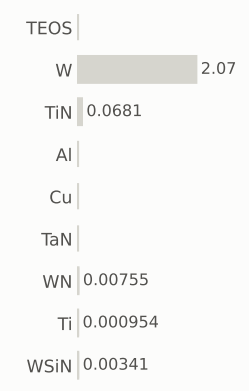

gases emitted (g)

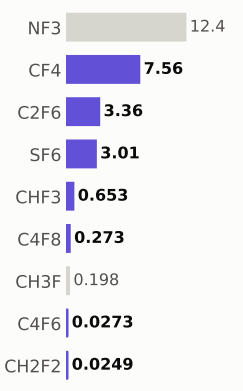

Step #11628.7919: HAR_etch

etch_noop · HAR_etch

1.04	1,241.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

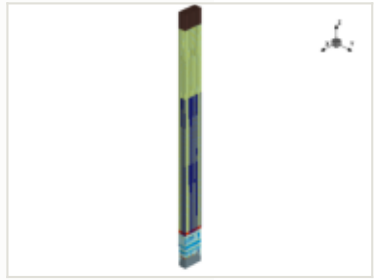

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

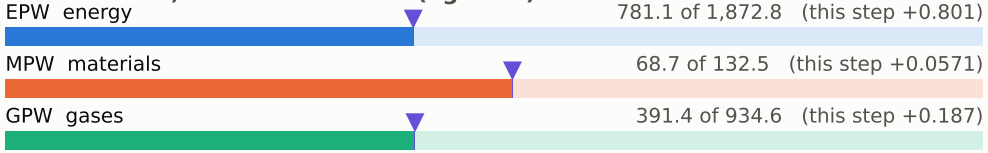

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

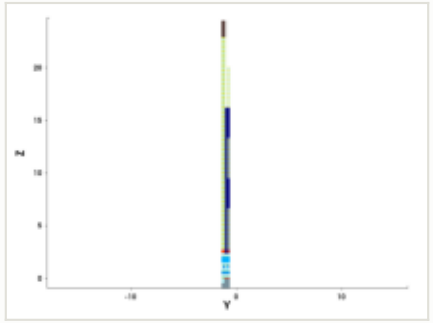

y cut at -1.035 µm

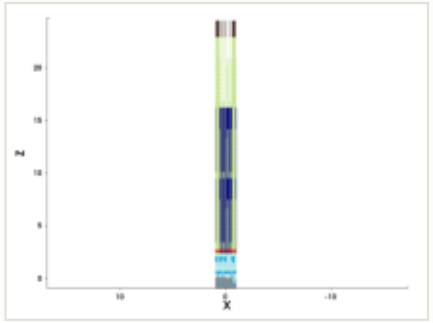

mask for this step

no mask for this step

steps by process area

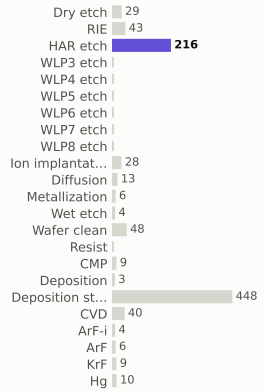

materials deposited (g)

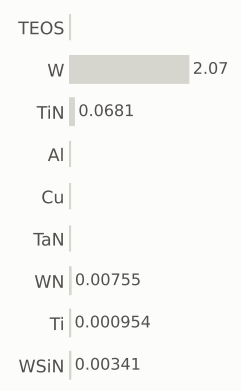

gases emitted (g)

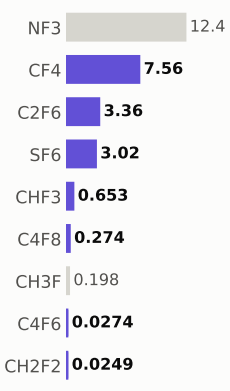

Step #11628.8591: HAR_etch

etch_noop · HAR_etch

1.04	1,242.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

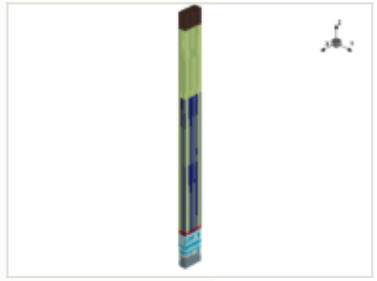

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

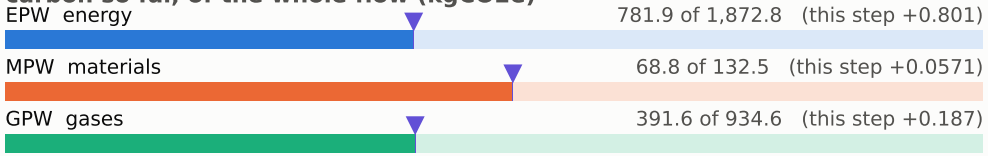

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

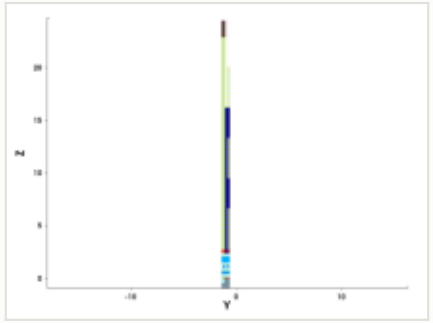

y cut at -1.035 µm

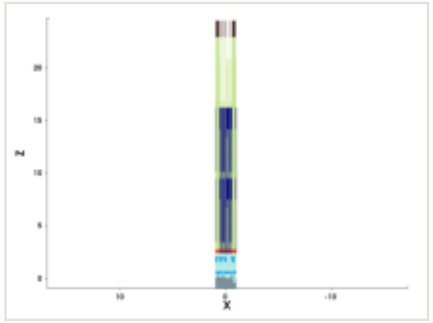

mask for this step

no mask for this step

steps by process area

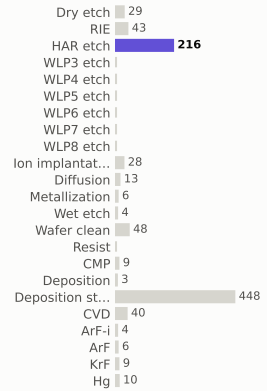

materials deposited (g)

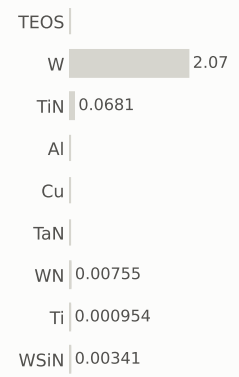

gases emitted (g)

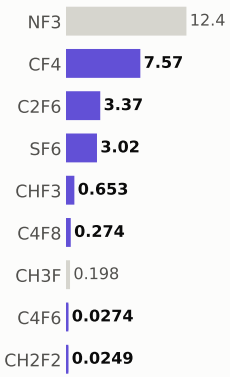

Step #11628.9262: HAR_etch

etch_noop · HAR_etch

1.04	1,243.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

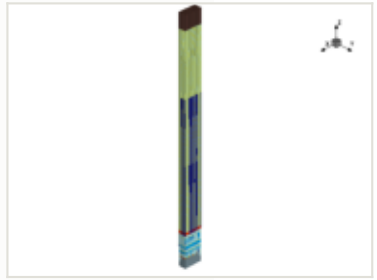

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

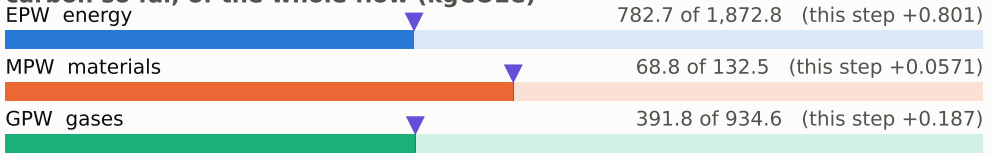

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

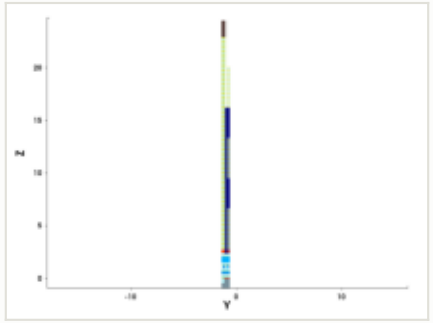

y cut at -1.035 µm

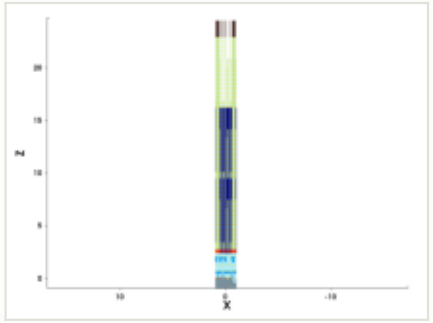

mask for this step

no mask for this step

steps by process area

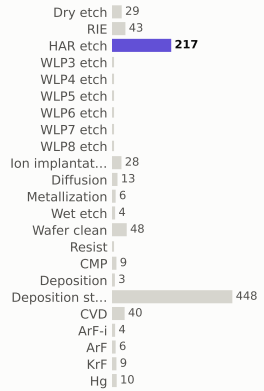

materials deposited (g)

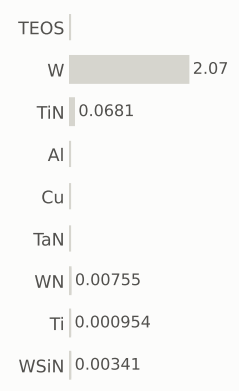

gases emitted (g)

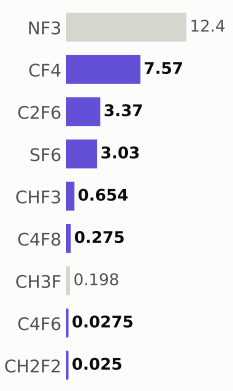

Step #11628.9933: HAR_etch

etch_noop · HAR_etch

1.04	1,244.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

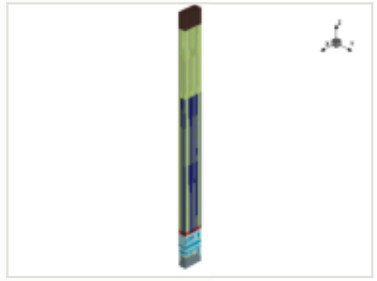

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

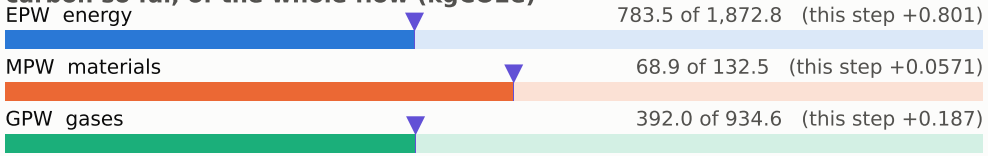

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

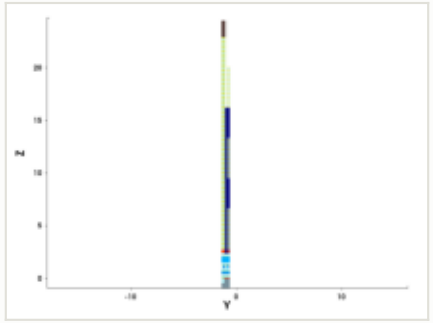

y cut at -1.035 µm

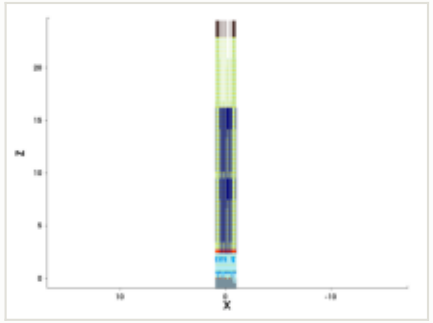

mask for this step

no mask for this step

steps by process area

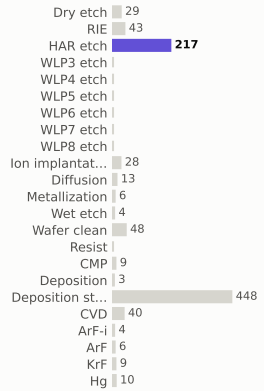

materials deposited (g)

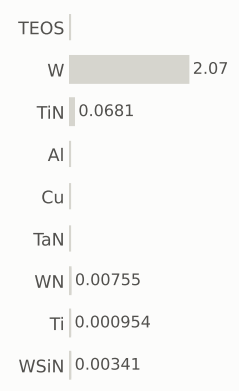

gases emitted (g)

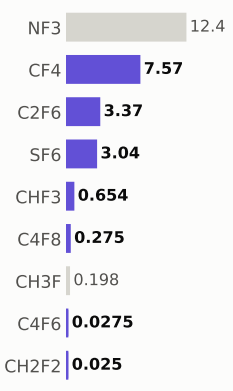

Step #11629.0604: HAR_etch

etch_noop · HAR_etch

1.04	1,245.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

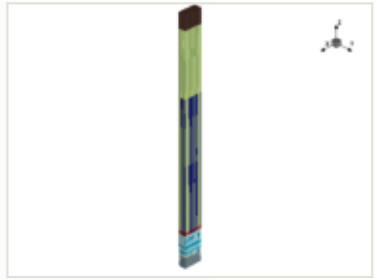

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

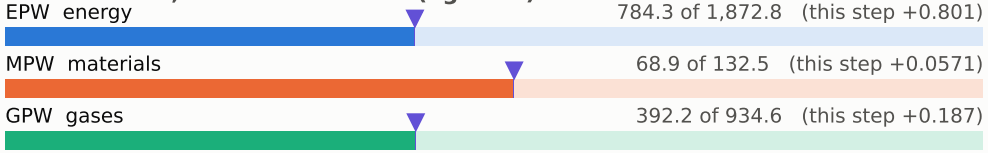

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

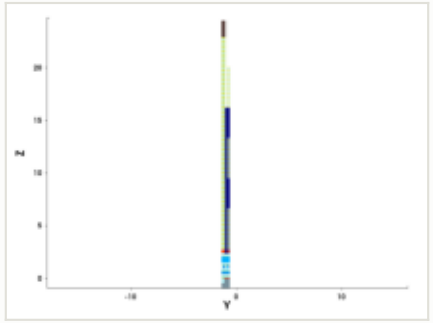

y cut at -1.035 µm

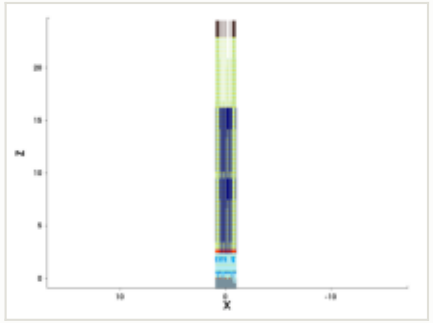

mask for this step

no mask for this step

steps by process area

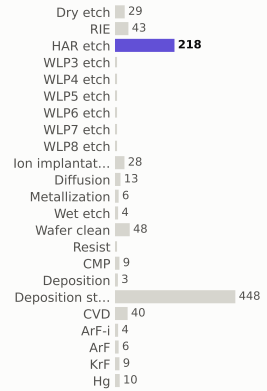

materials deposited (g)

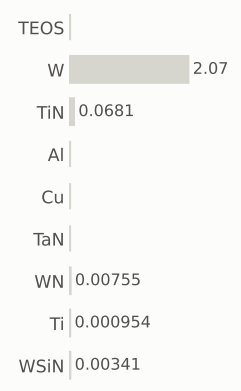

gases emitted (g)

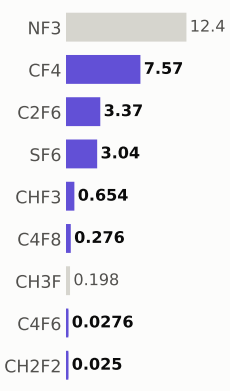

Step #11629.1275: HAR_etch

etch_noop · HAR_etch

1.04	1,246.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

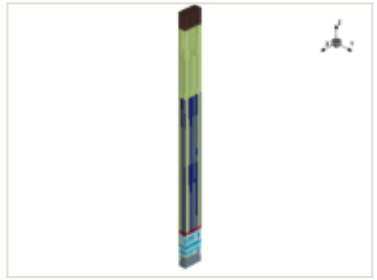

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

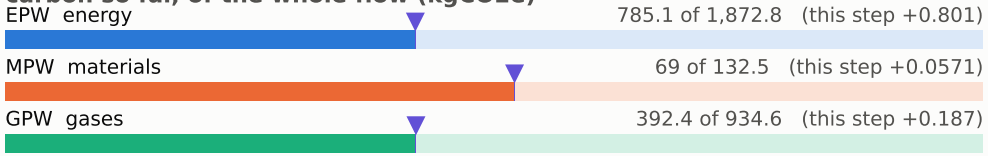

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

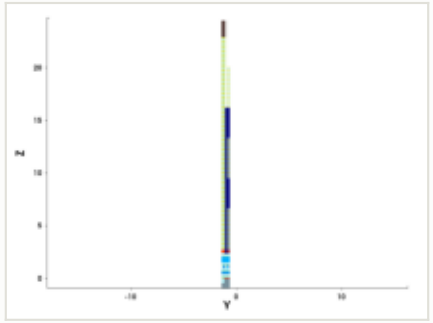

y cut at -1.035 µm

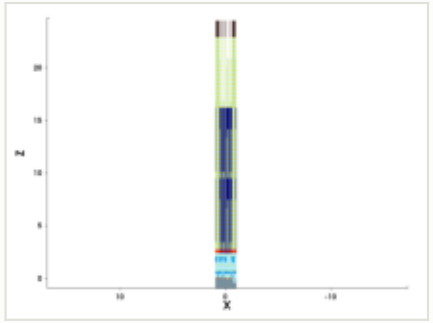

mask for this step

no mask for this step

steps by process area

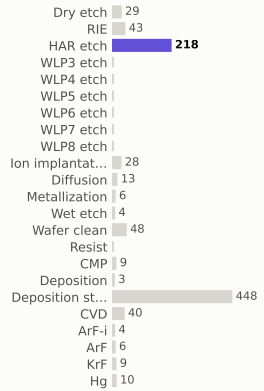

materials deposited (g)

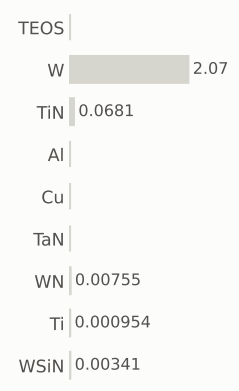

gases emitted (g)

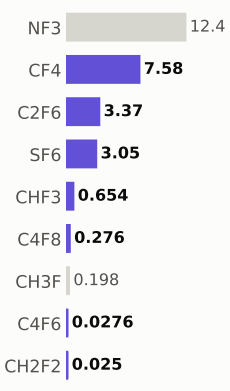

Step #11629.1946: HAR_etch

etch_noop · HAR_etch

1.04	1,247.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

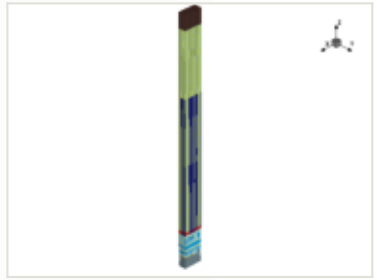

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

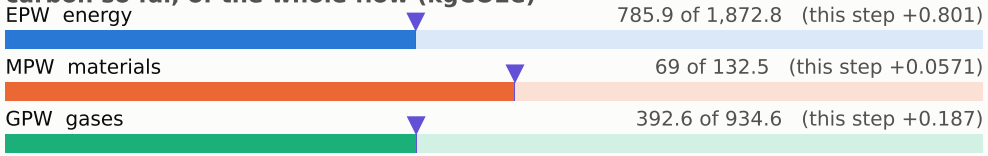

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

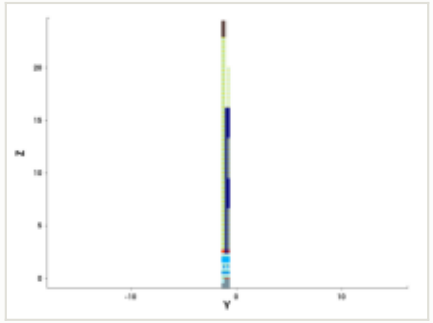

y cut at -1.035 µm

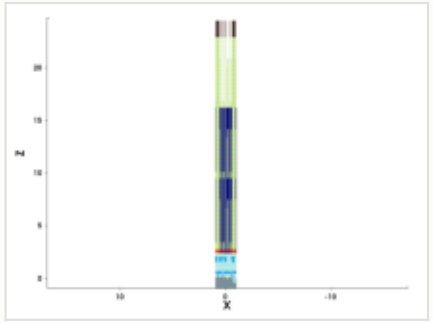

mask for this step

no mask for this step

steps by process area

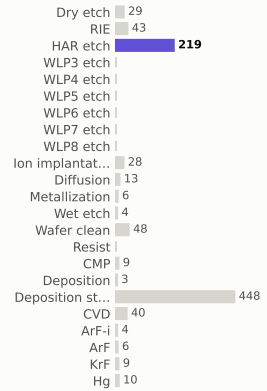

materials deposited (g)

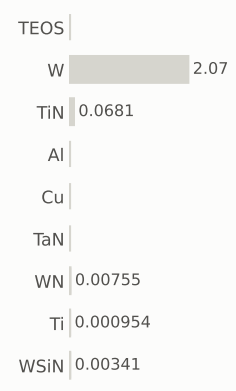

gases emitted (g)

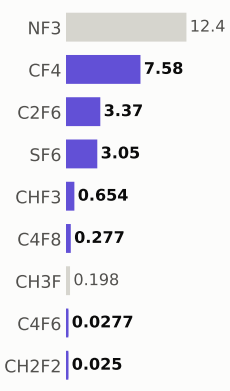

Step #11629.2617: HAR_etch

etch_noop · HAR_etch

1.04	1,248.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

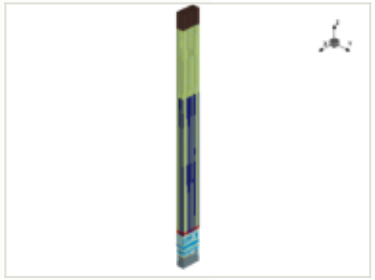

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

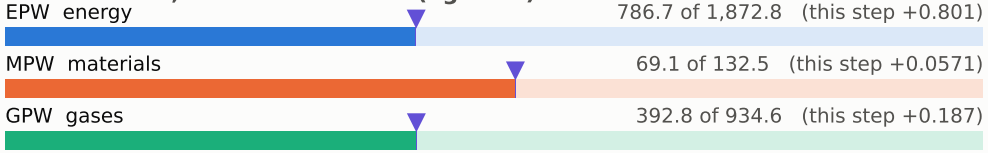

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

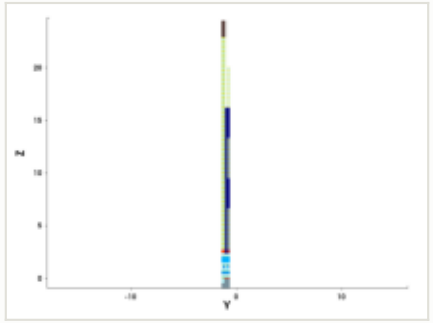

y cut at -1.035 µm

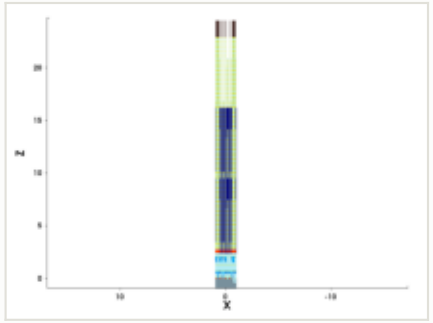

mask for this step

no mask for this step

steps by process area

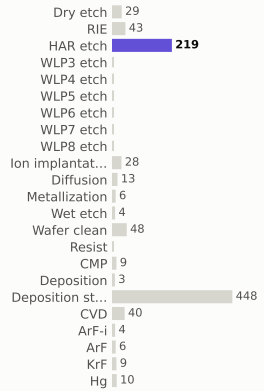

materials deposited (g)

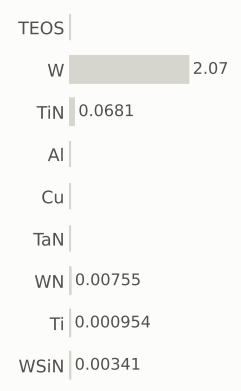

gases emitted (g)

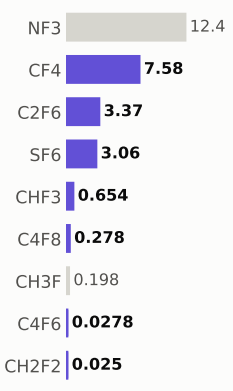

Step #11629.3289: HAR_etch

etch_noop · HAR_etch

1.04	1,249.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

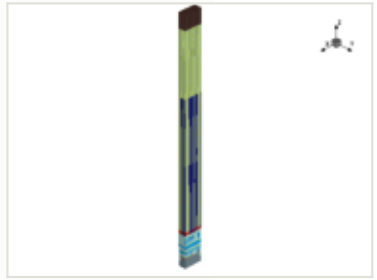

x cut at 0.000 µm

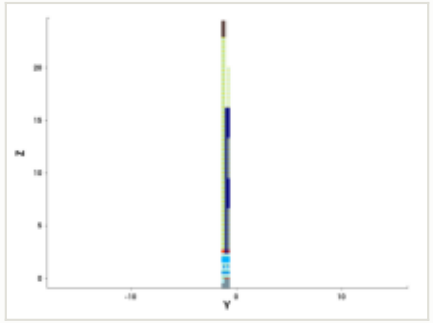

y cut at -1.035 µm

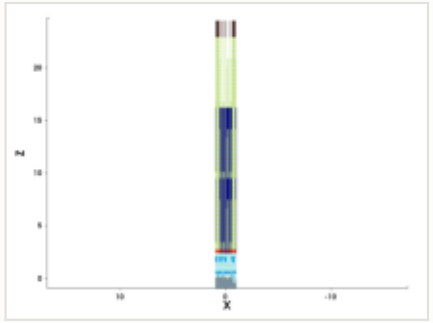

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

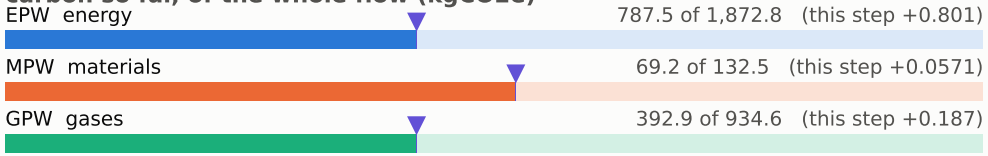

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

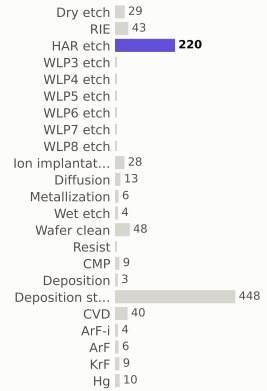

materials deposited (g)

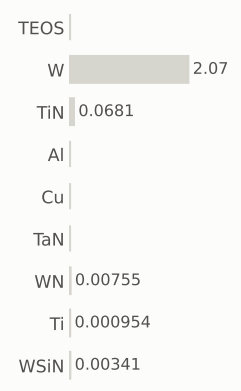

gases emitted (g)

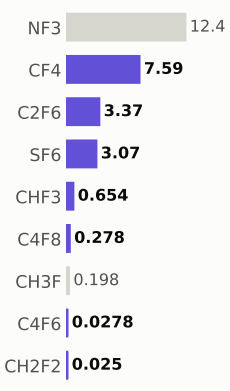

Step #11629.396: HAR_etch

etch_noop · HAR_etch

1.04	1,250.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

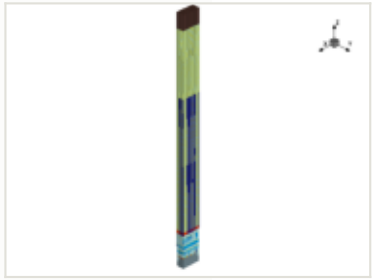

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

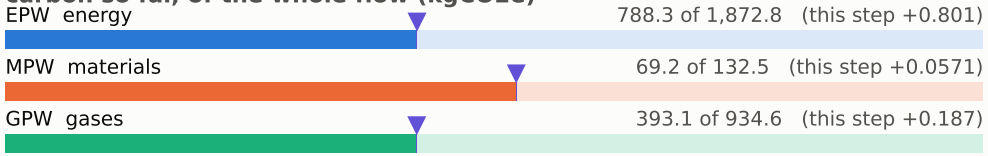

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

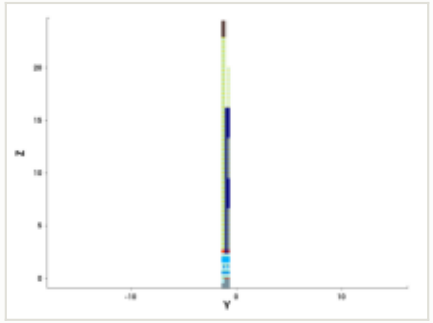

y cut at -1.035 µm

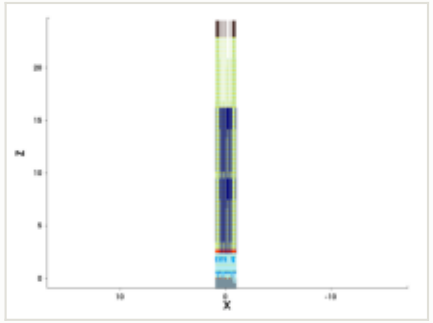

mask for this step

no mask for this step

steps by process area

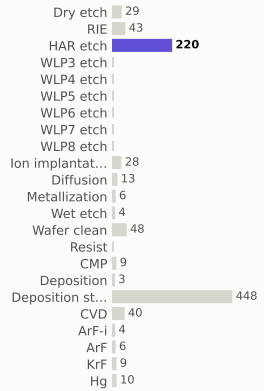

materials deposited (g)

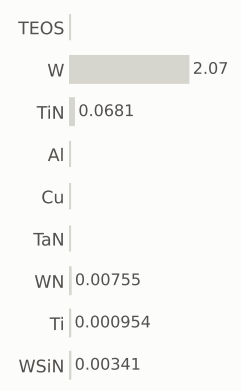

gases emitted (g)

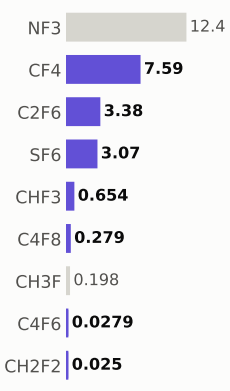

Step #11629.4631: HAR_etch

etch_noop · HAR_etch

1.04	1,251.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

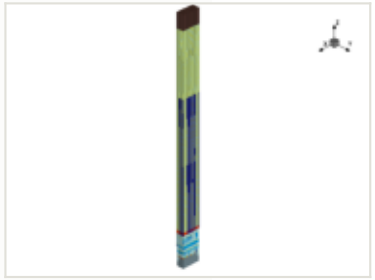

x cut at 0.000 µm

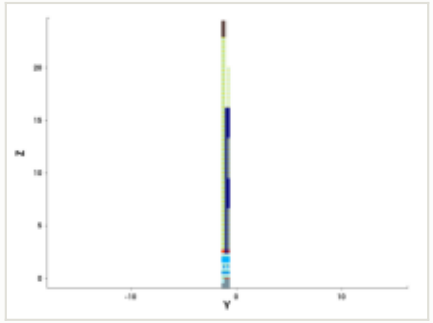

y cut at -1.035 µm

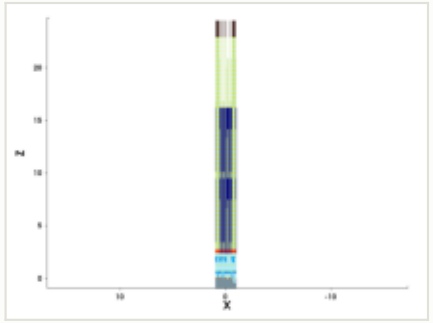

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

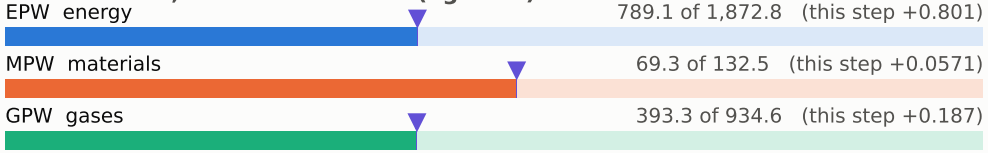

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

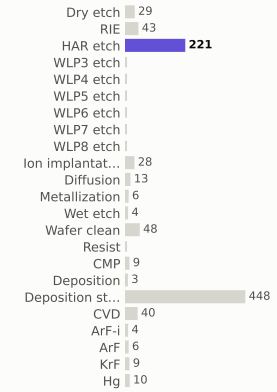

materials deposited (g)

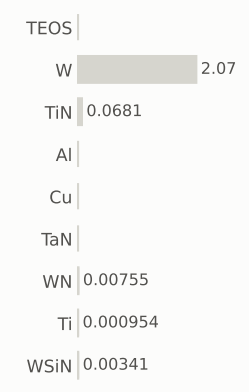

gases emitted (g)

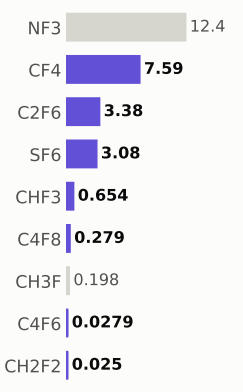

Step #11629.5302: HAR_etch

etch_noop · HAR_etch

1.04	1,252.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

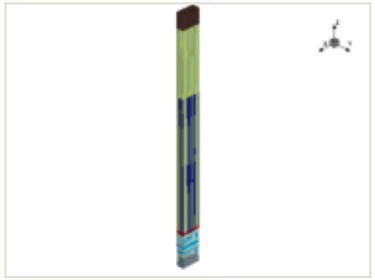

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

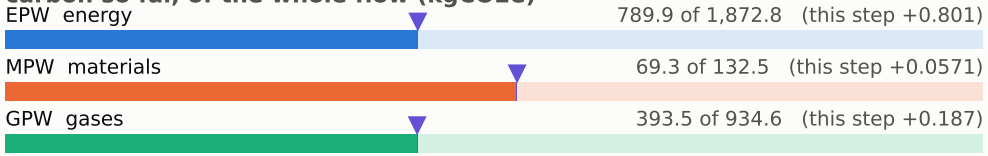

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

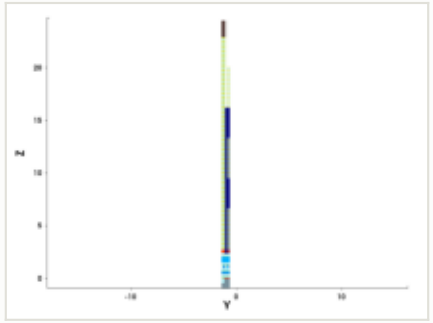

y cut at -1.035 µm

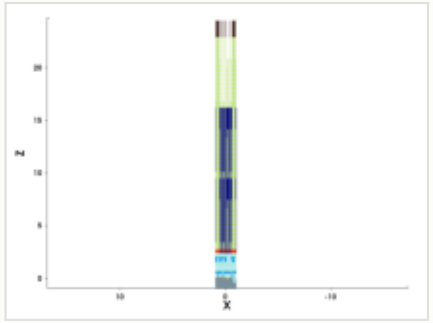

mask for this step

no mask for this step

steps by process area

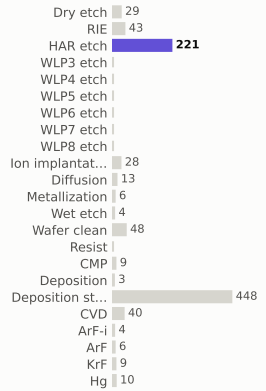

materials deposited (g)

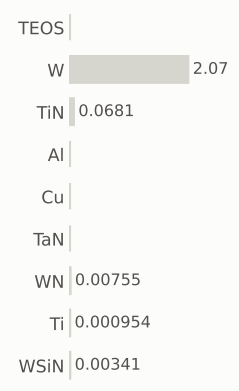

gases emitted (g)

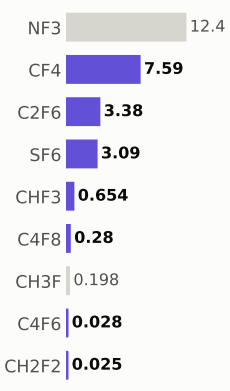

Step #11629.5973: HAR_etch

etch_noop · HAR_etch

1.04	1,253.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

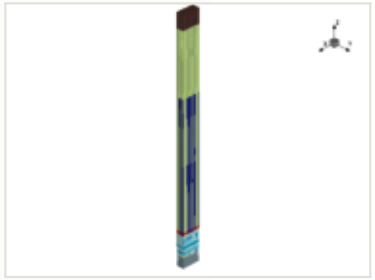

x cut at 0.000 µm

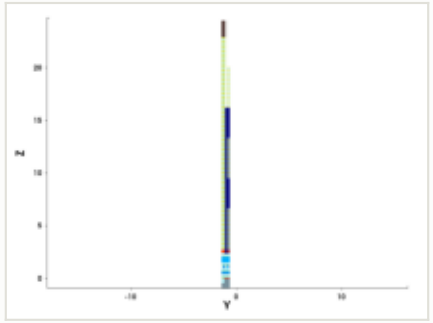

y cut at -1.035 µm

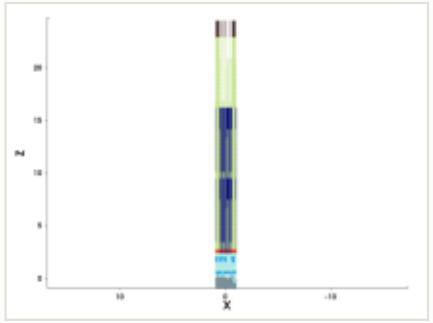

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

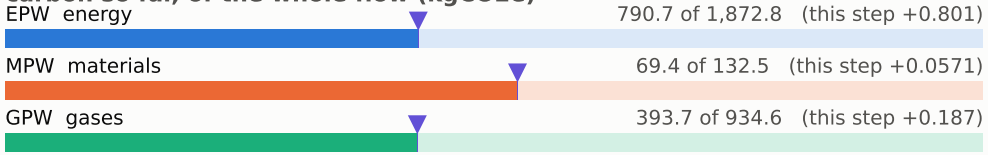

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

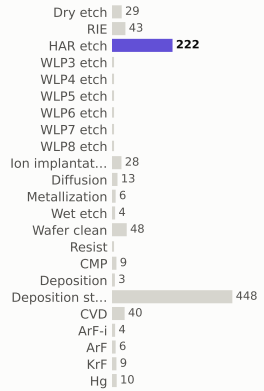

materials deposited (g)

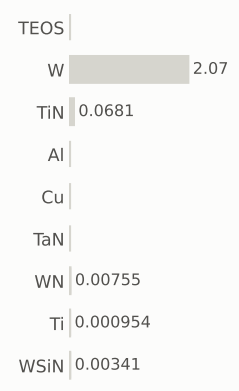

gases emitted (g)

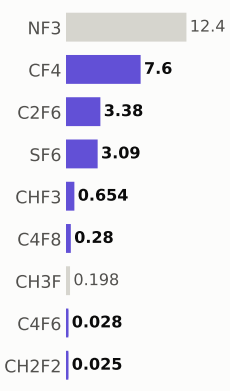

Step #11629.6644: HAR_etch

etch_noop · HAR_etch

1.04	1,254.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

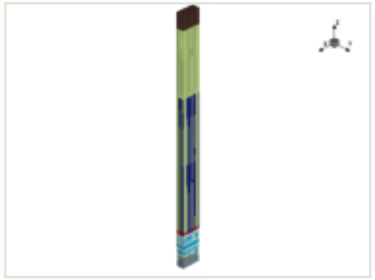

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

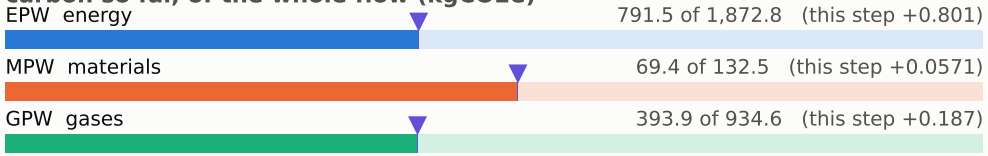

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

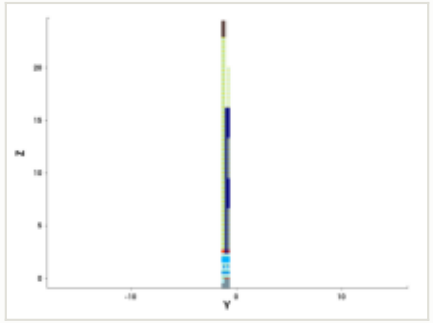

y cut at -1.035 µm

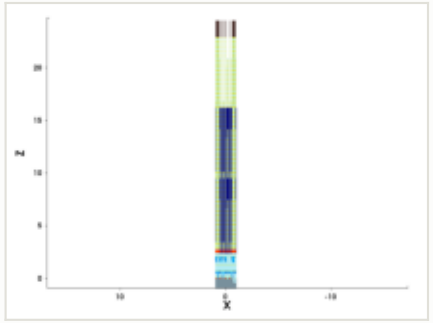

mask for this step

no mask for this step

steps by process area

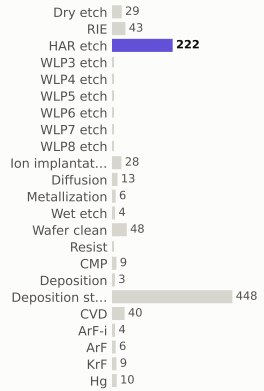

materials deposited (g)

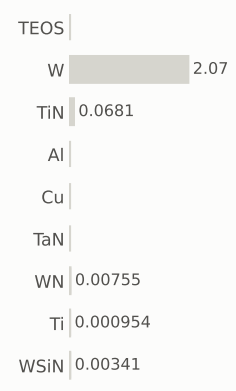

gases emitted (g)

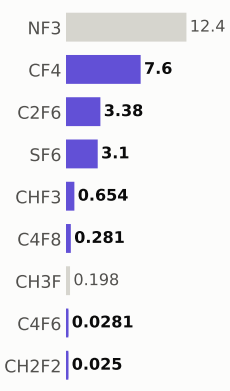

Step #11629.7315: HAR_etch

etch_noop · HAR_etch

1.04	1,255.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

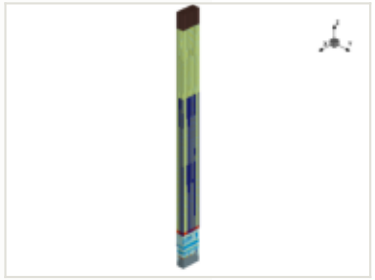

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

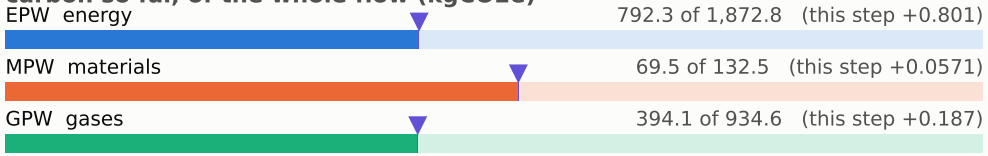

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

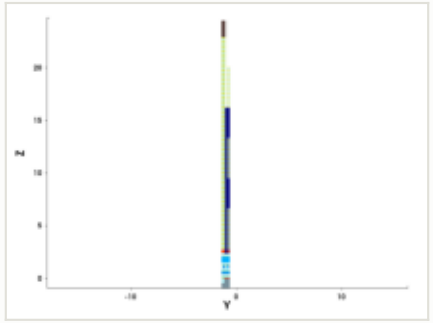

y cut at -1.035 µm

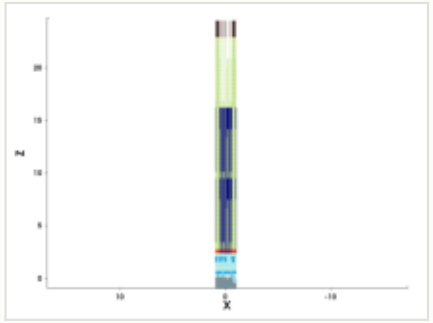

mask for this step

no mask for this step

steps by process area

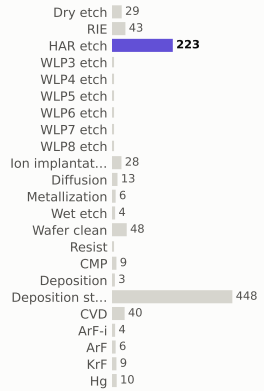

materials deposited (g)

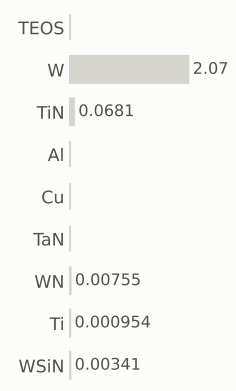

gases emitted (g)

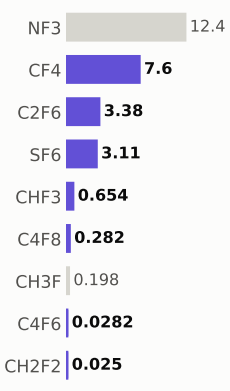

Step #11629.7987: HAR_etch

etch_noop · HAR_etch

1.04	1,256.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

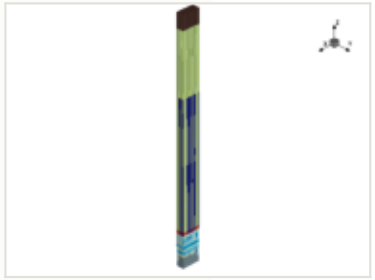

x cut at 0.000 µm

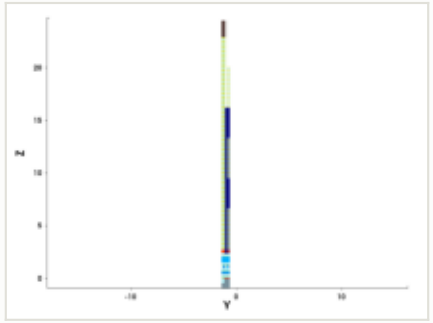

y cut at -1.035 µm

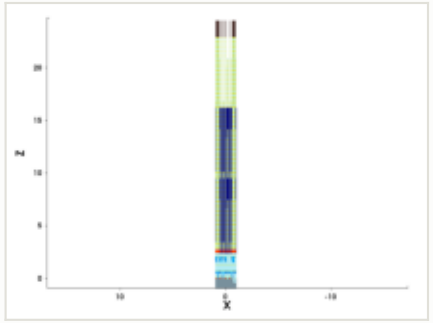

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

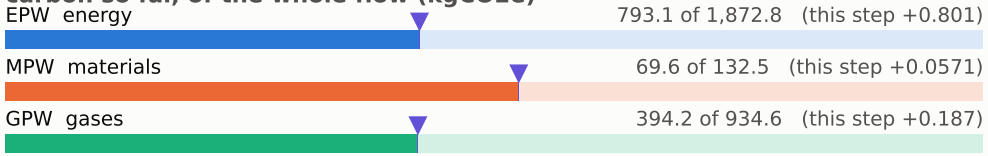

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

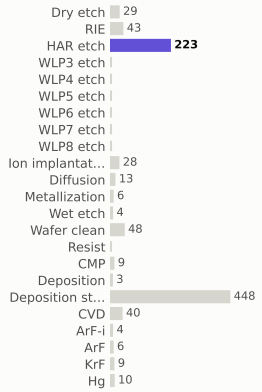

materials deposited (g)

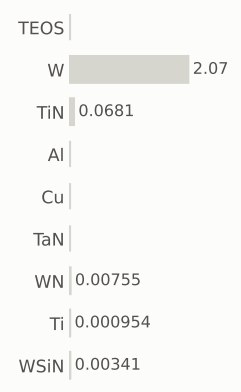

gases emitted (g)

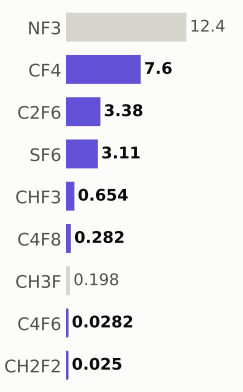

Step #11629.8658: HAR_etch

etch_noop · HAR_etch

1.04	1,257.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

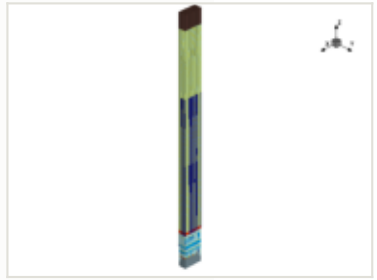

x cut at 0.000 µm

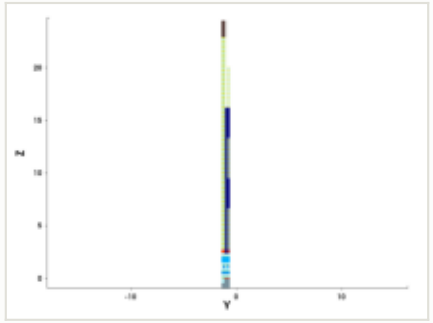

y cut at -1.035 µm

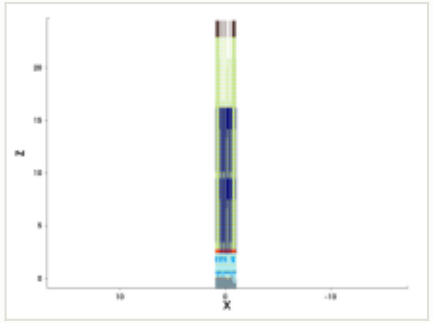

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

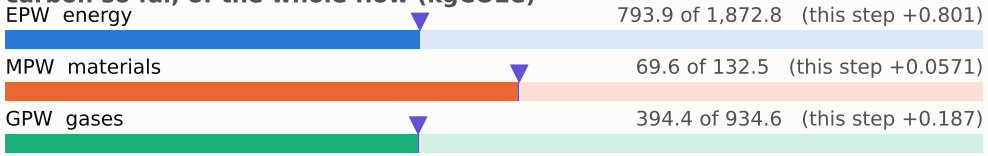

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

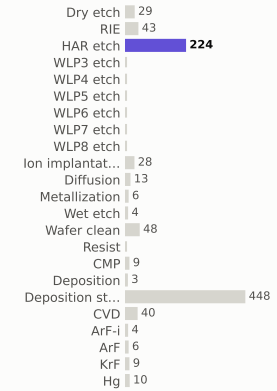

materials deposited (g)

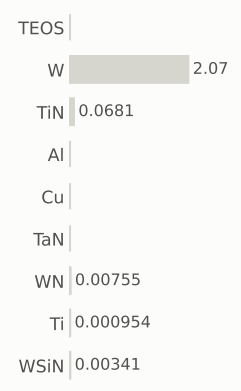

gases emitted (g)

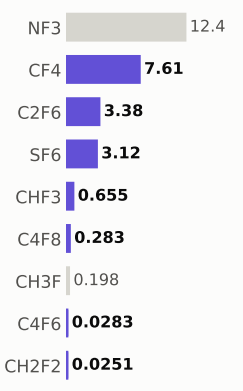

Step #11629.9329: HAR_etch

etch_noop · HAR_etch

1.04	1,259.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

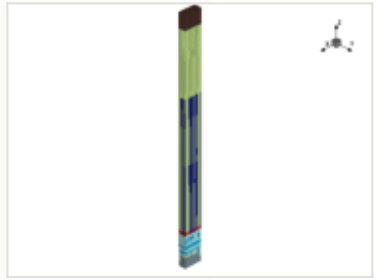

x cut at 0.000 µm

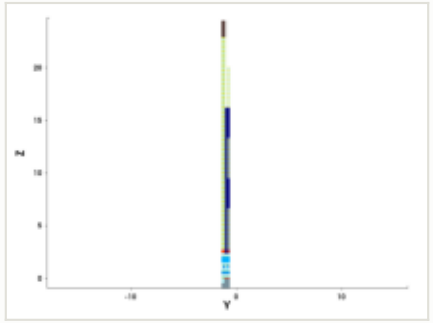

y cut at -1.035 µm

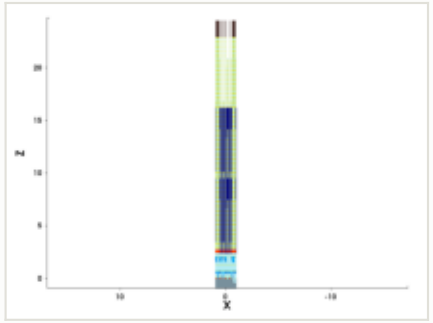

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

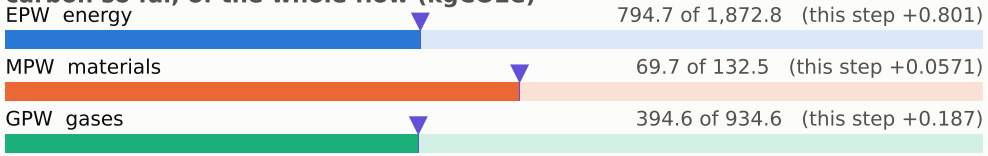

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

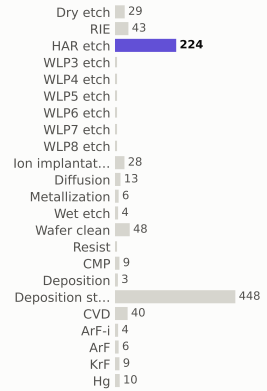

materials deposited (g)

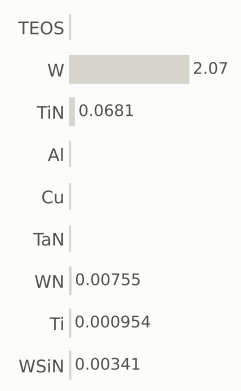

gases emitted (g)

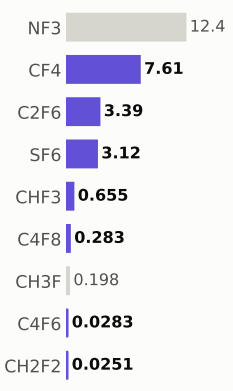

Step #11630: Dry_etch

etch_strip · Dry_etch

0.801	1,259.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

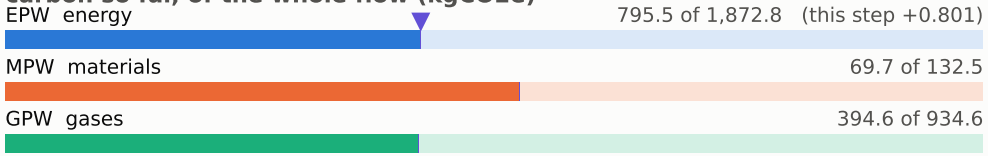

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

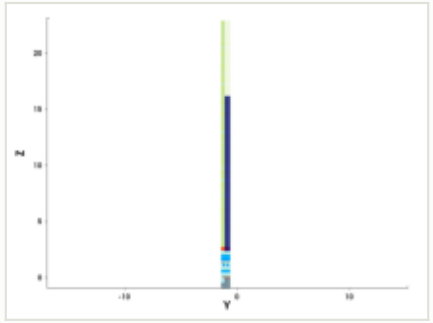

y cut at -1.035 µm

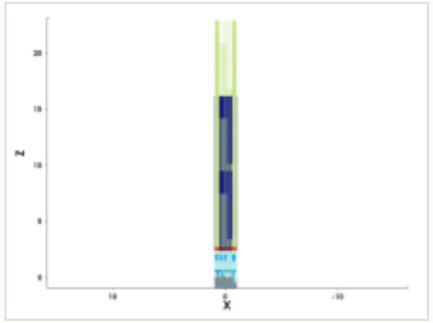

mask for this step

no mask for this step

steps by process area

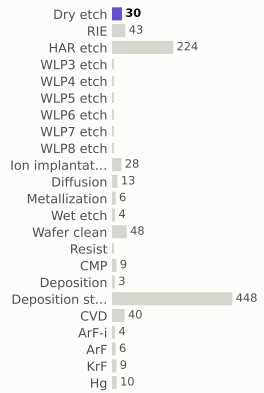

materials deposited (g)

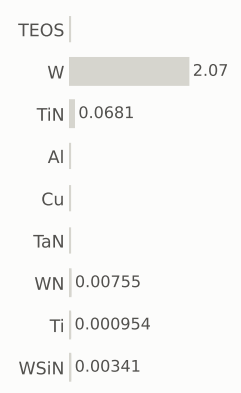

gases emitted (g)

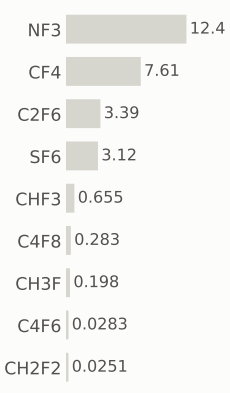

Step #11640: Wafer_clean

clean · Wafer_clean

0.169	1,260.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

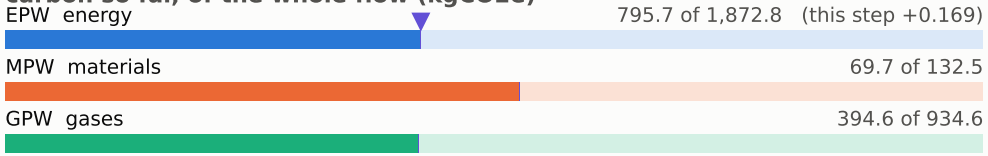

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

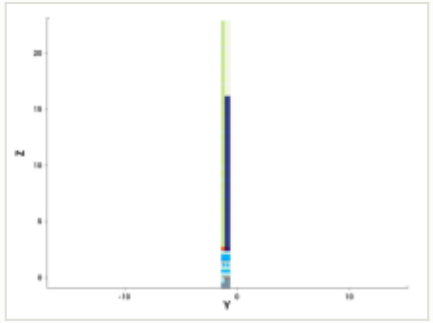

y cut at -1.035 µm

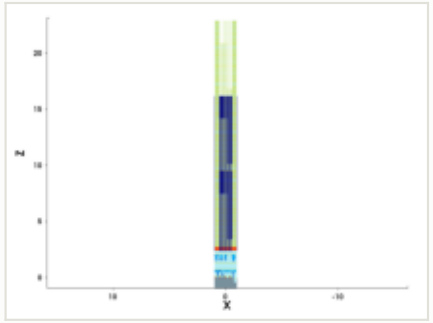

mask for this step

no mask for this step

steps by process area

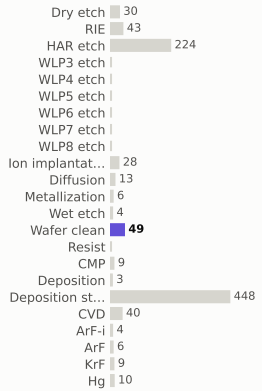

materials deposited (g)

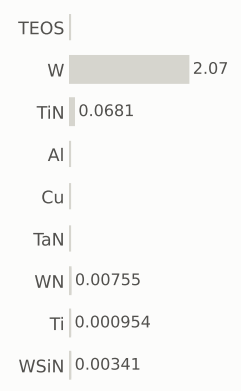

gases emitted (g)

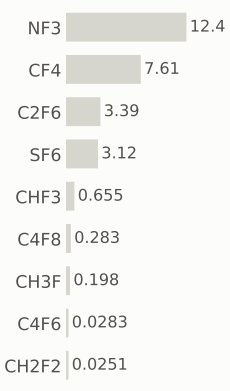

Step #11650: CVD

depo_isotropic · CVD

1.31	1,261.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	TiN
thickness	0.07 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0329 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

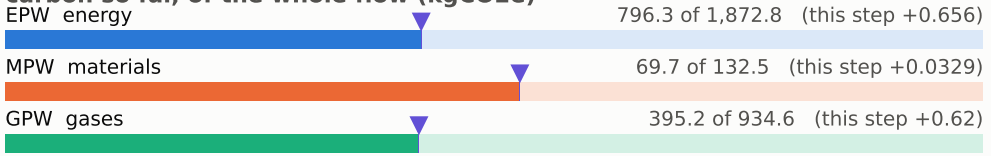

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

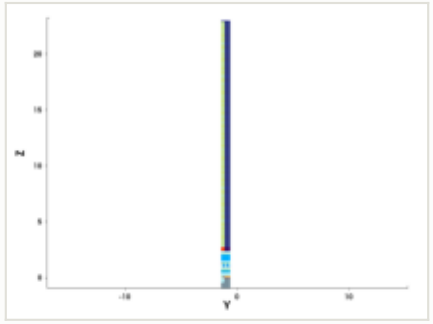

y cut at -1.035 µm

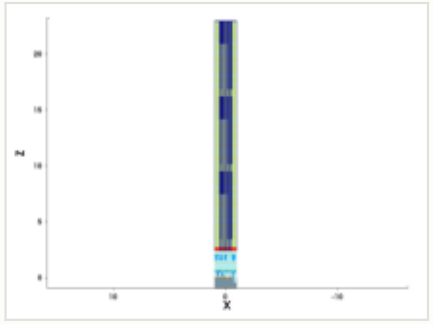

mask for this step

no mask for this step

steps by process area

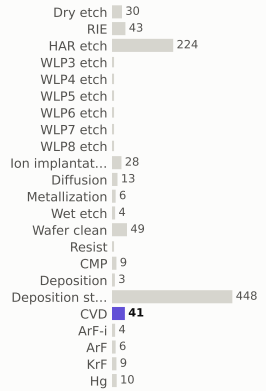

materials deposited (g)

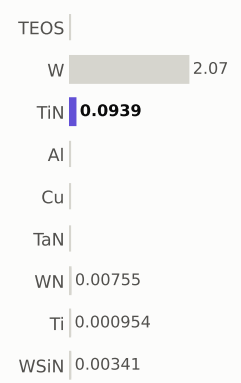

gases emitted (g)

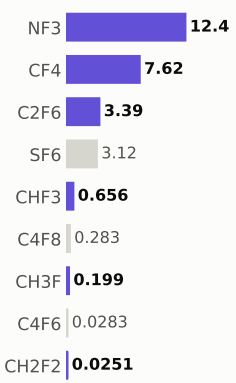

Step #11660: CMP

etch_cmp · CMP

0.169	1,261.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

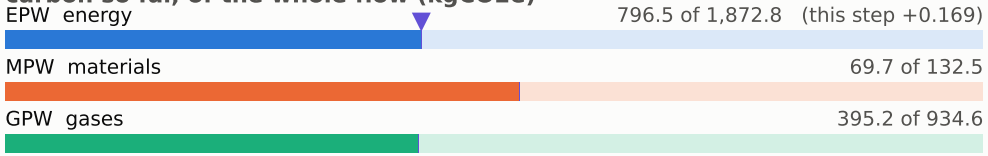

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

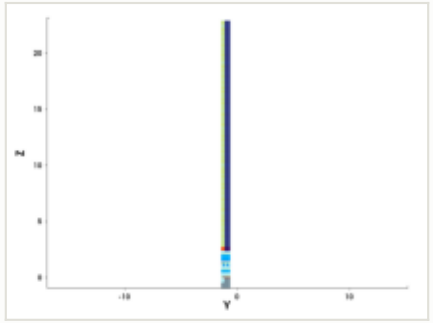

y cut at -1.035 µm

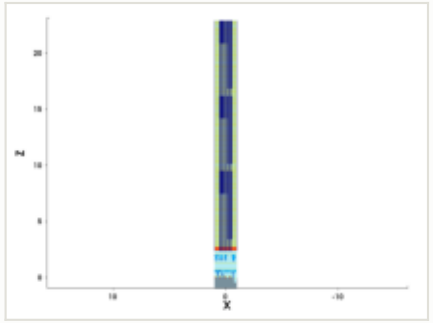

mask for this step

no mask for this step

steps by process area

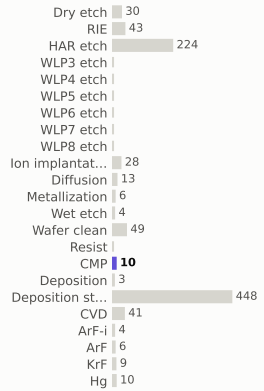

materials deposited (g)

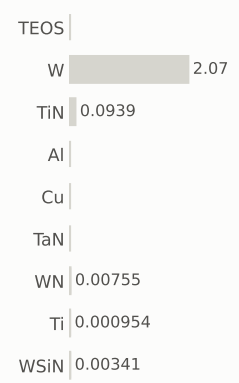

gases emitted (g)

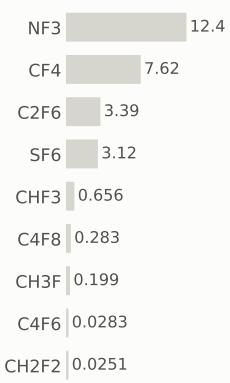

Step #11670: Wafer_clean

clean · Wafer_clean

0.169	1,261.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

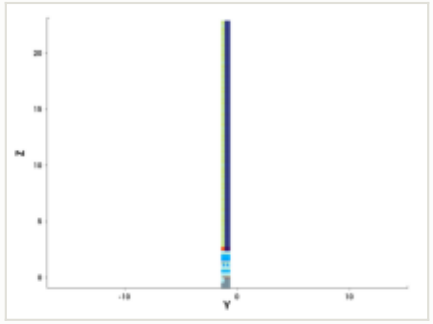

y cut at -1.035 µm

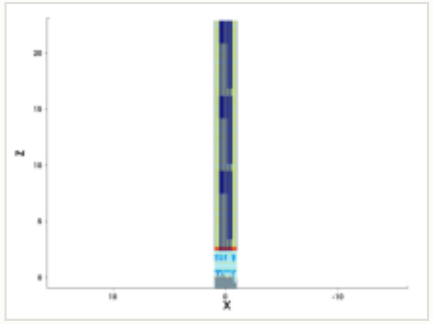

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

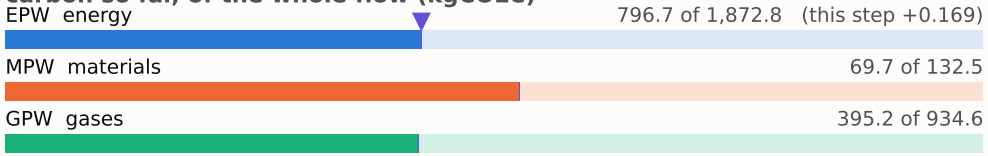

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

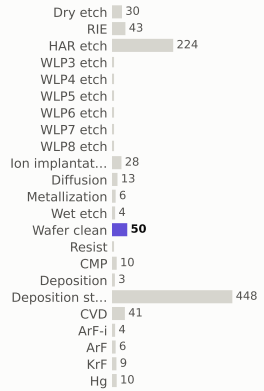

materials deposited (g)

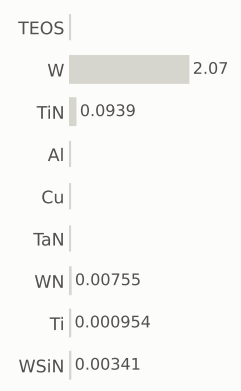

gases emitted (g)

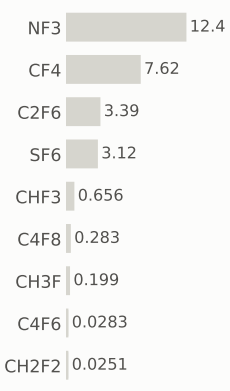

Step #11680: Wafer_clean

clean · Wafer_clean

0.169	1,261.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

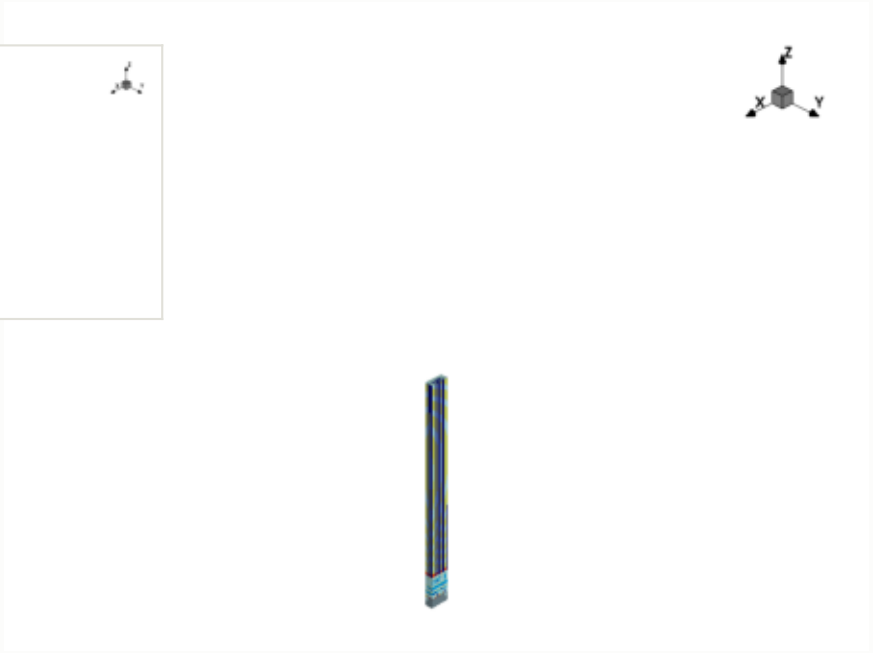

x cut at 0.000 µm

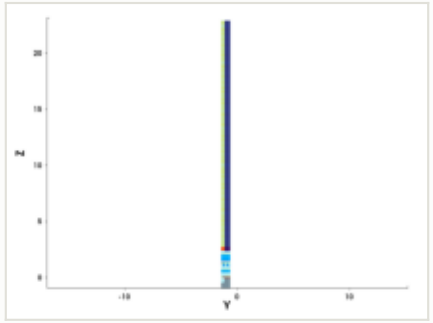

y cut at -1.035 µm

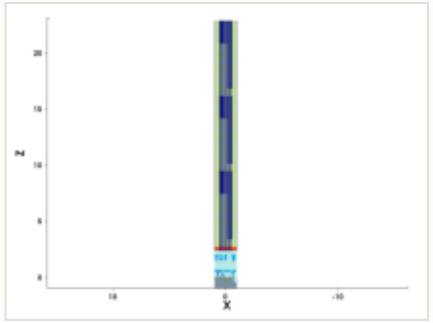

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

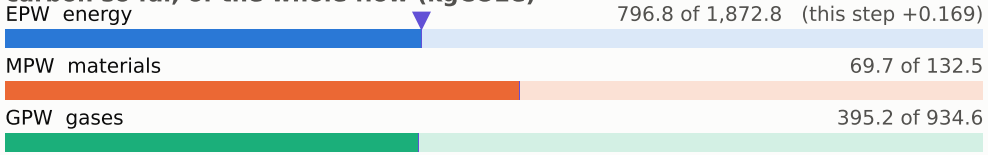

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

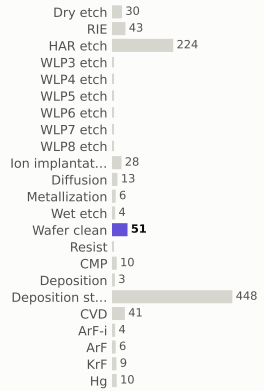

materials deposited (g)

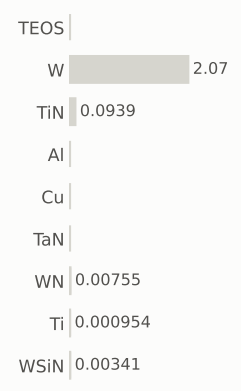

gases emitted (g)

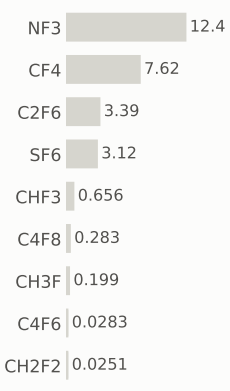

Step #11690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,262.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

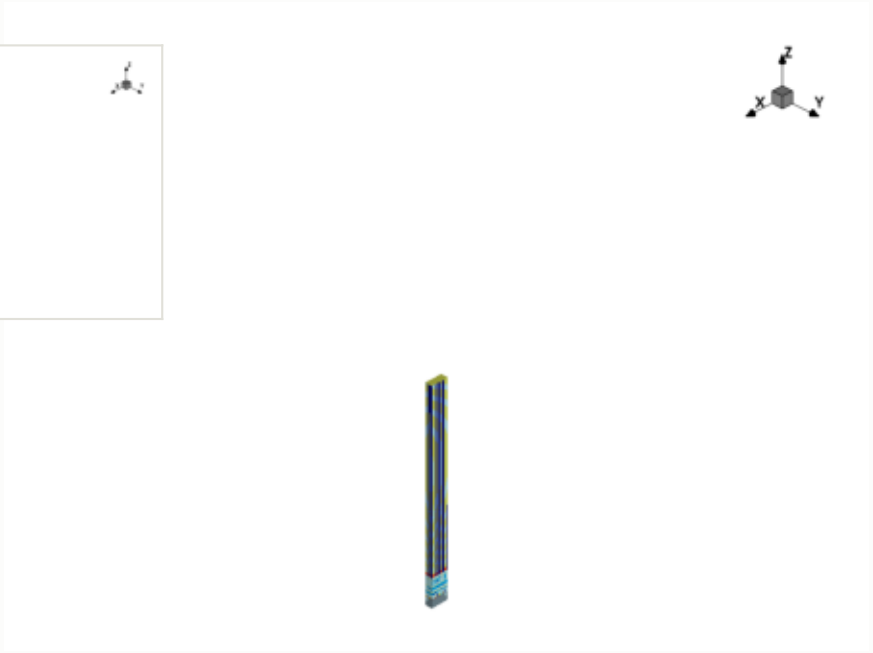

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

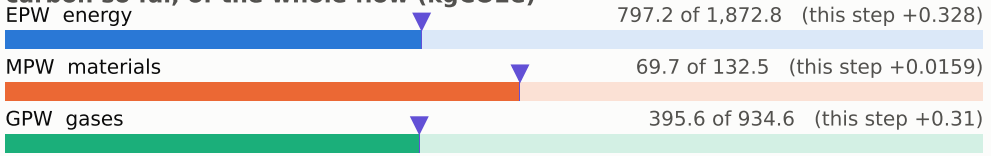

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

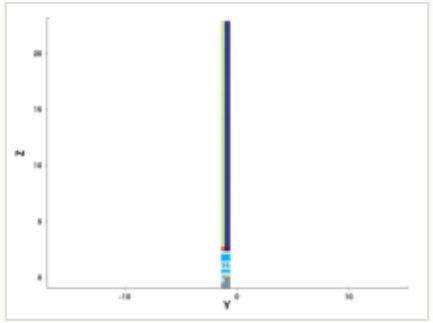

y cut at -1.035 µm

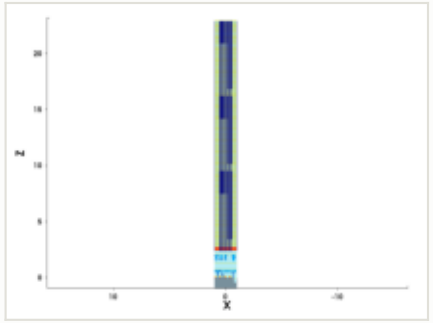

mask for this step

no mask for this step

steps by process area

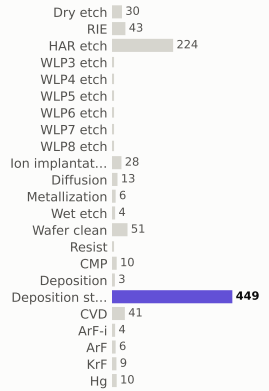

materials deposited (g)

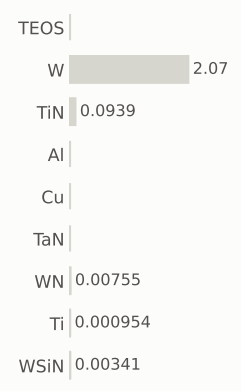

gases emitted (g)

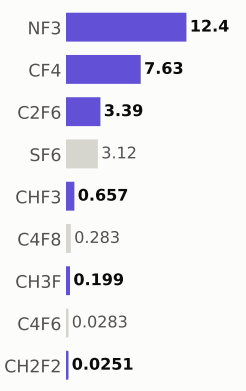

Step #11700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,263.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

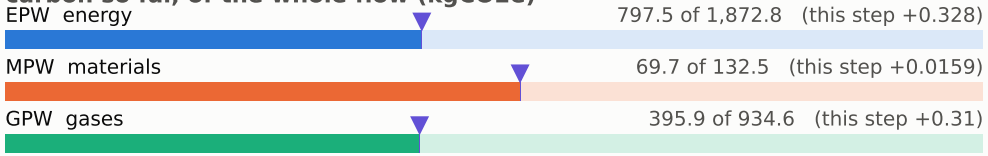

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

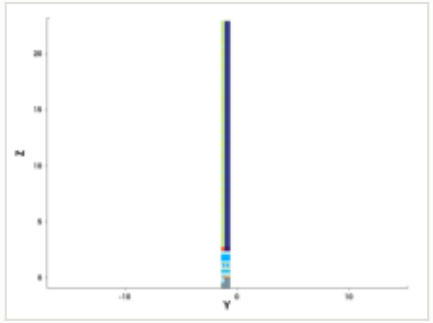

y cut at -1.035 µm

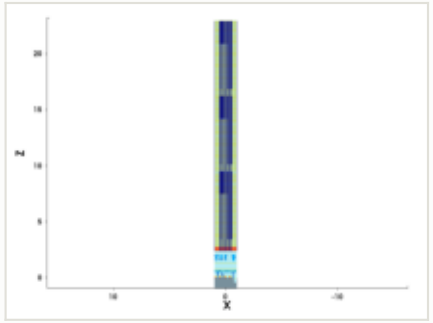

mask for this step

no mask for this step

steps by process area

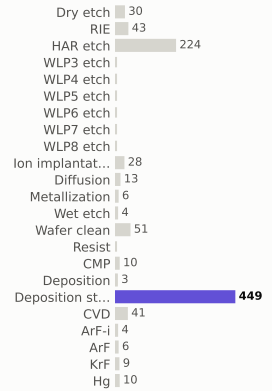

materials deposited (g)

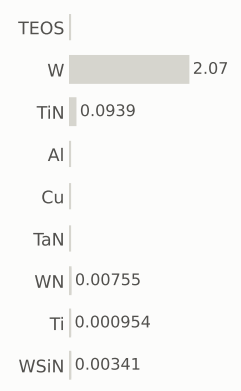

gases emitted (g)

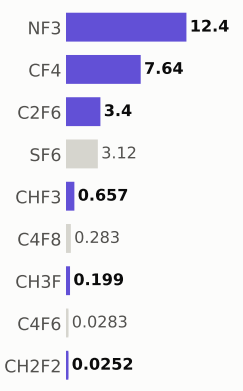

Step #11710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,263.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

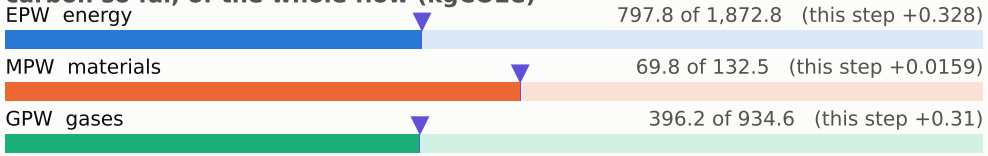

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

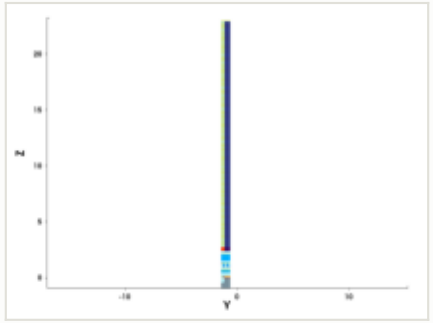

y cut at -1.035 µm

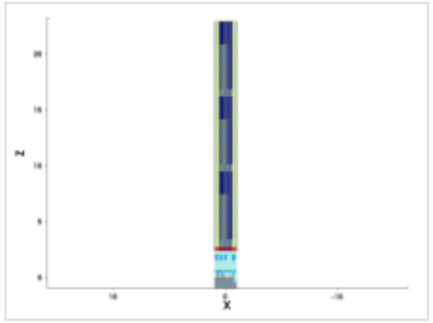

mask for this step

no mask for this step

steps by process area

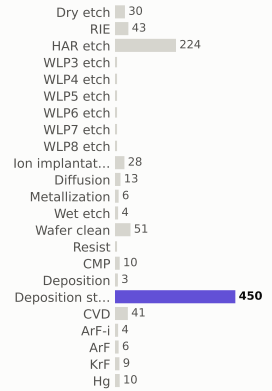

materials deposited (g)

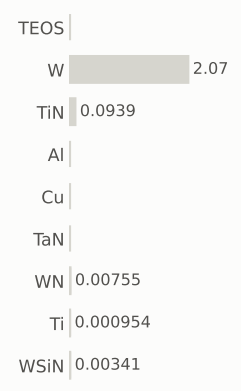

gases emitted (g)

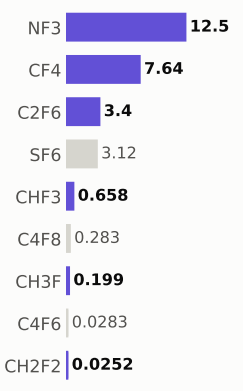

Step #11720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,264.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 798.1 of 1,872.8 (this step +0.328)

MPW materials — 69.8 of 132.5 (this step +0.0159)

GPW gases — 396.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

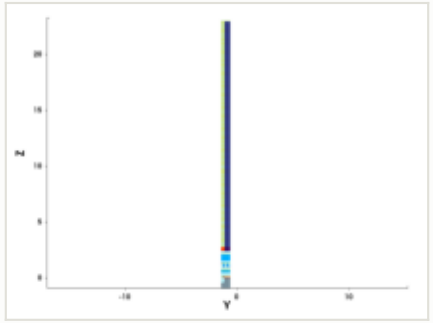

y cut at -1.035 µm

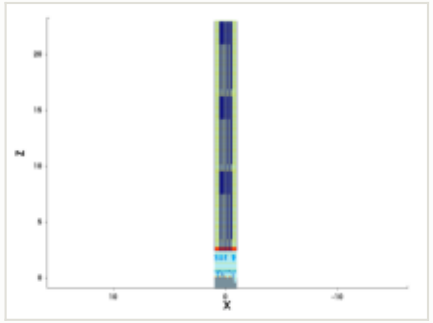

mask for this step

no mask for this step

steps by process area

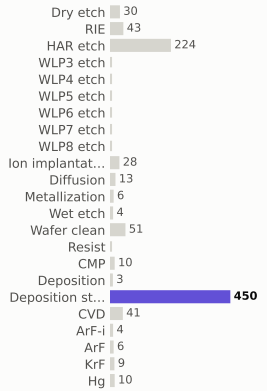

materials deposited (g)

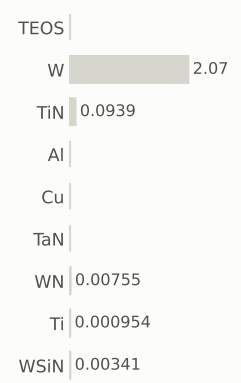

gases emitted (g)

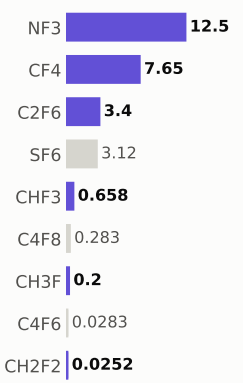

Step #11730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,265.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

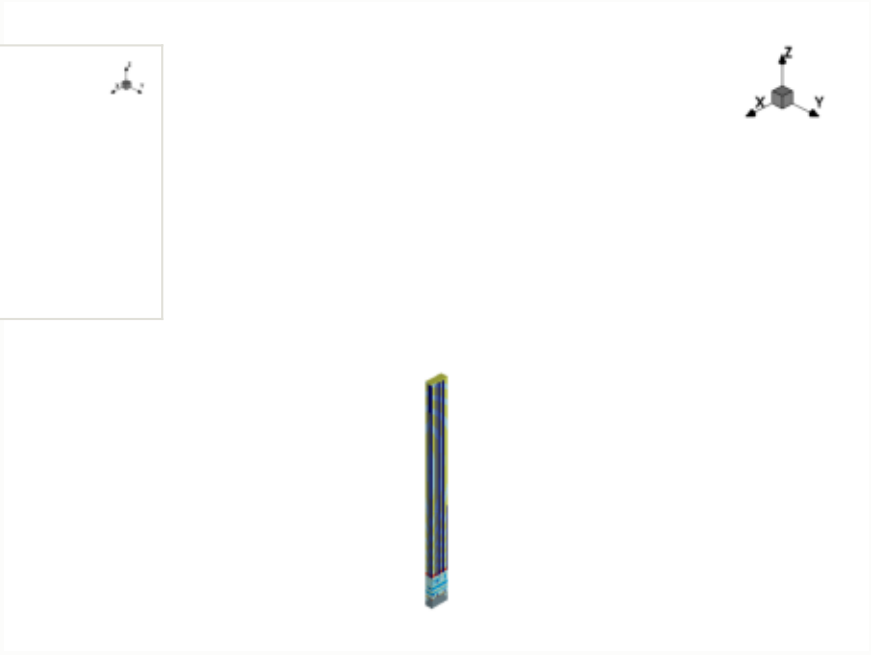

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

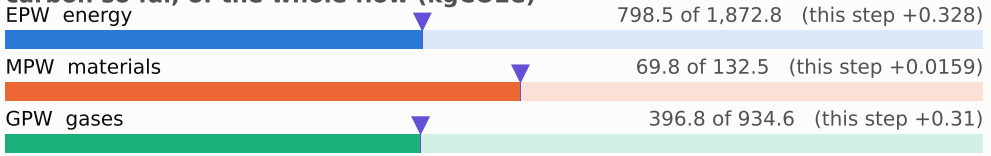

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

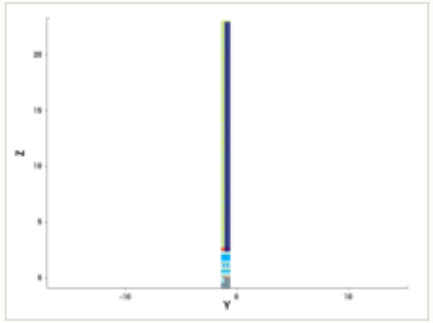

y cut at -1.035 µm

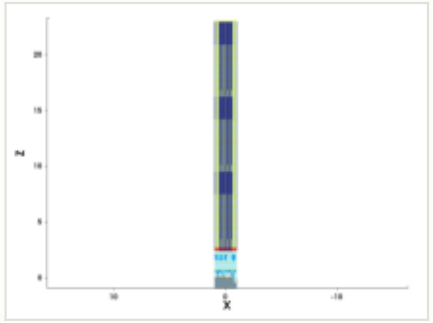

mask for this step

no mask for this step

steps by process area

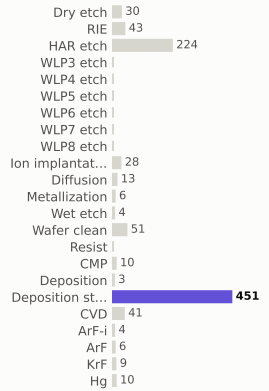

materials deposited (g)

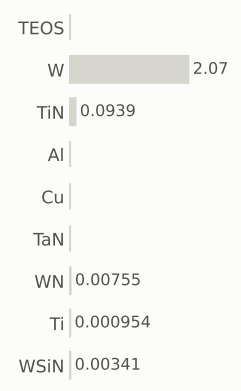

gases emitted (g)

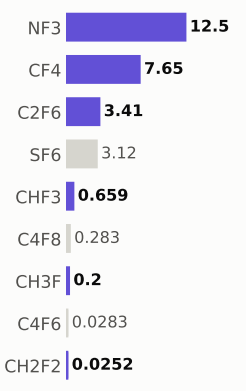

Step #11740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,265.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

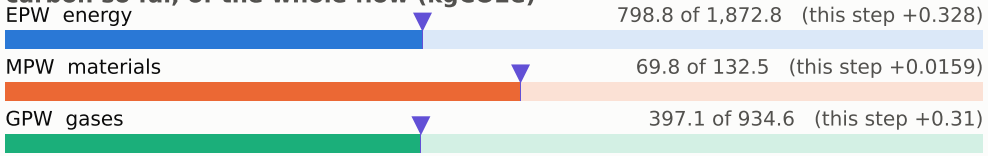

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

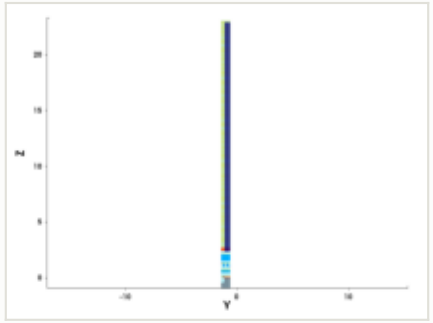

y cut at -1.035 µm

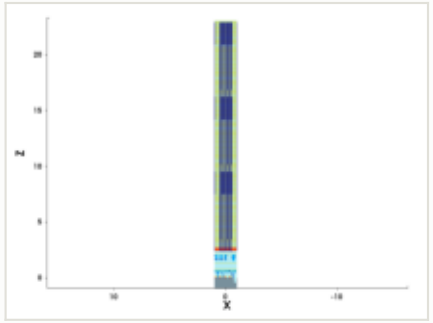

mask for this step

no mask for this step

steps by process area

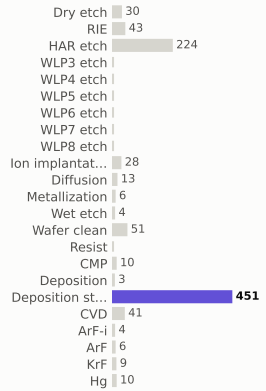

materials deposited (g)

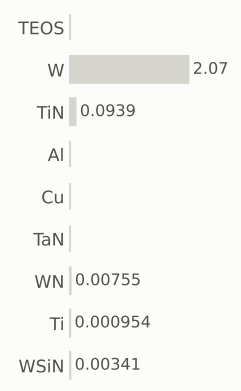

gases emitted (g)

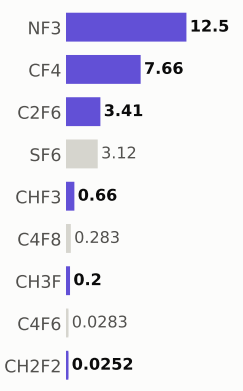

Step #11750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,266.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

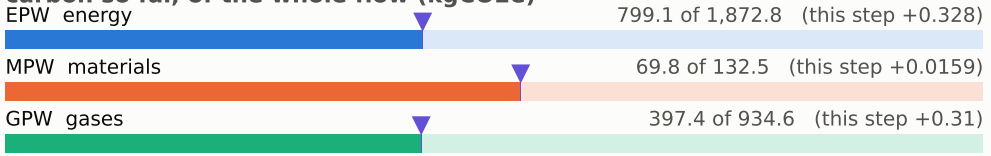

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

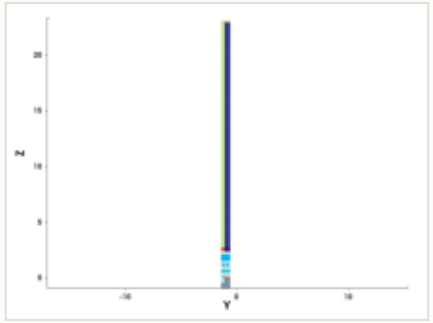

y cut at -1.035 µm

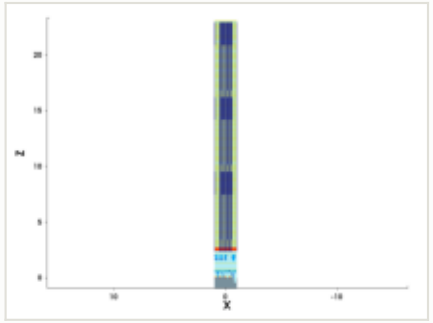

mask for this step

no mask for this step

steps by process area

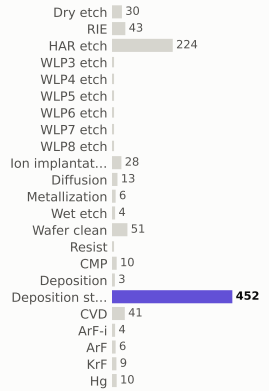

materials deposited (g)

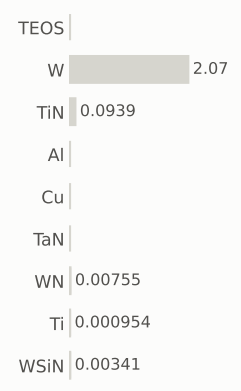

gases emitted (g)

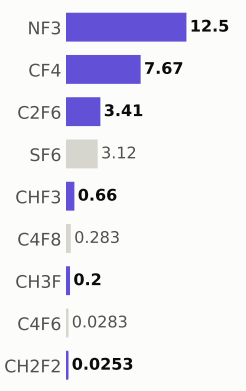

Step #11760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,267.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

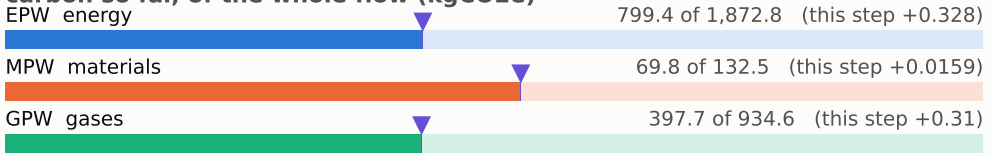

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

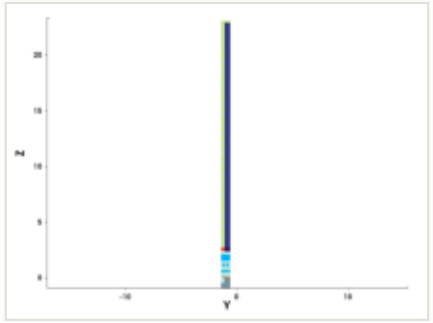

y cut at -1.035 µm

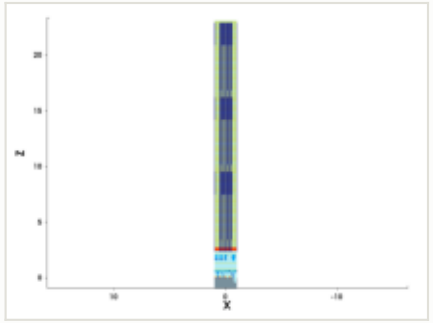

mask for this step

no mask for this step

steps by process area

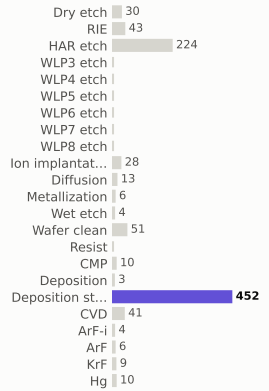

materials deposited (g)

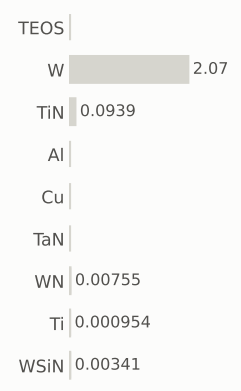

gases emitted (g)

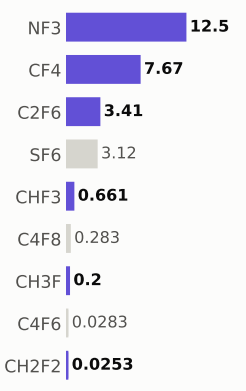

Step #11770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,267.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

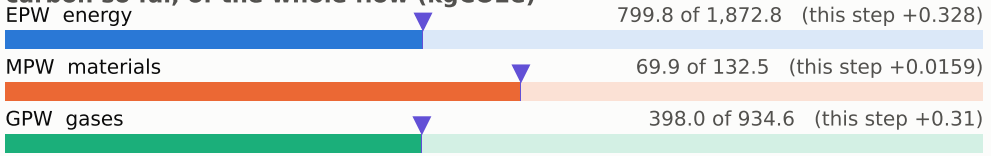

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

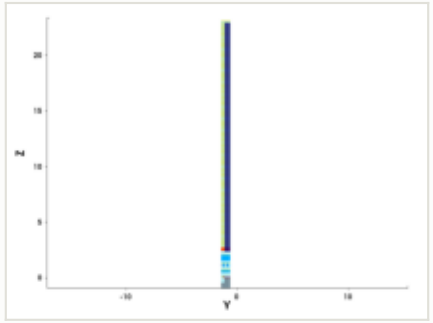

y cut at -1.035 µm

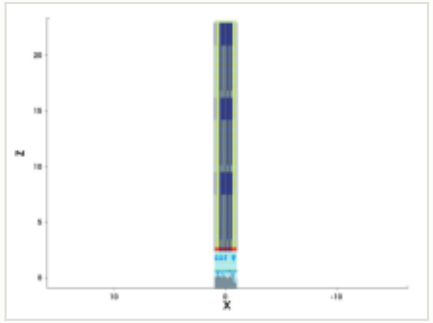

mask for this step

no mask for this step

steps by process area

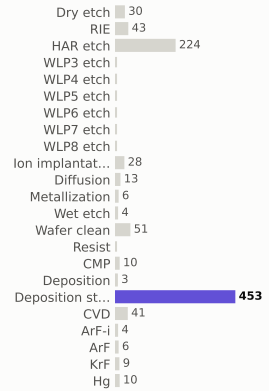

materials deposited (g)

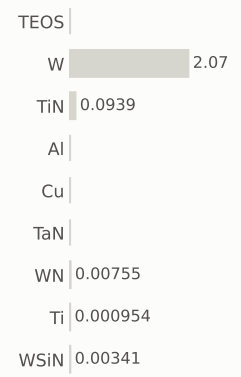

gases emitted (g)

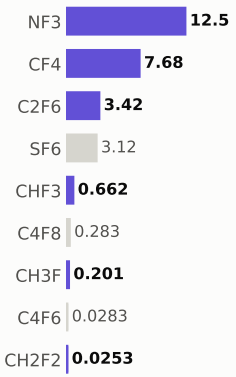

Step #11780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,268.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

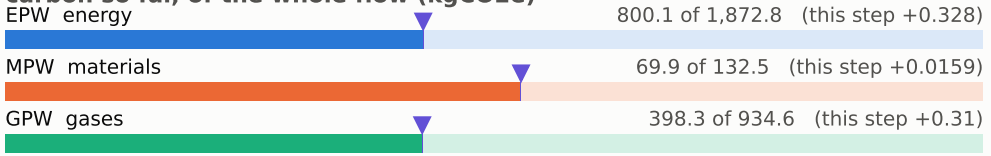

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

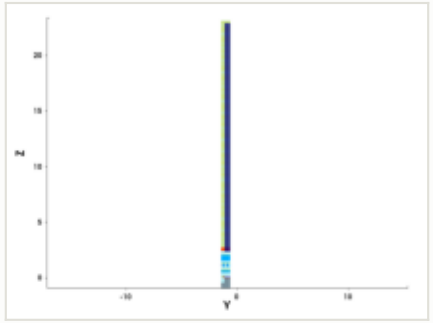

y cut at -1.035 µm

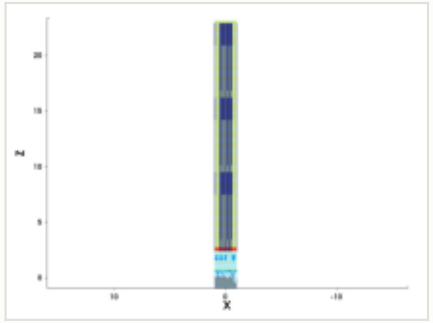

mask for this step

no mask for this step

steps by process area

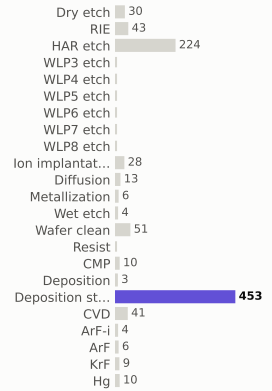

materials deposited (g)

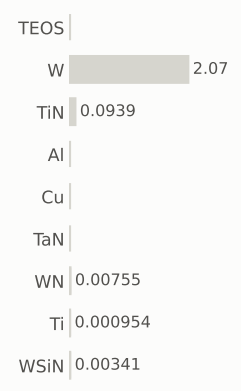

gases emitted (g)

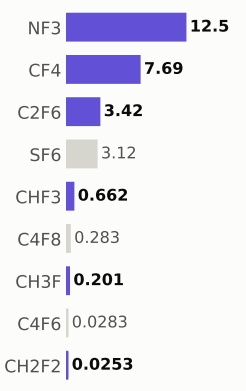

Step #11790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,269.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

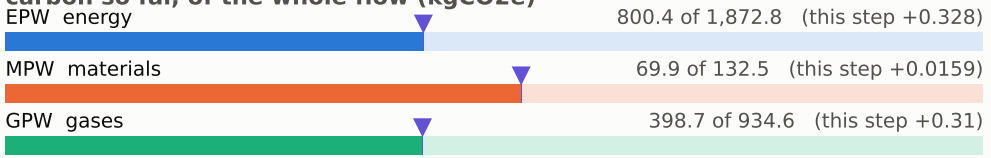

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

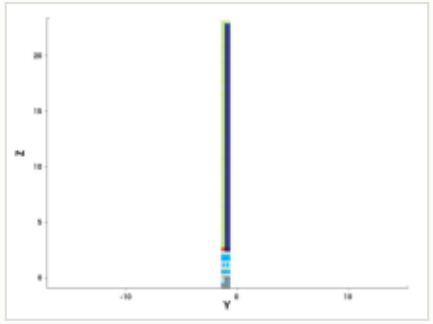

y cut at -1.035 µm

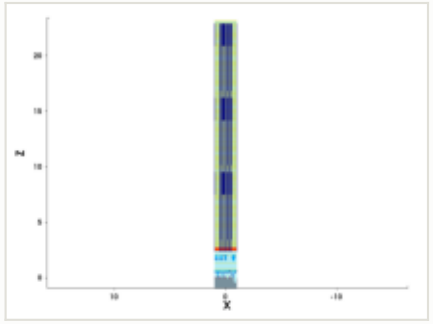

mask for this step

no mask for this step

steps by process area

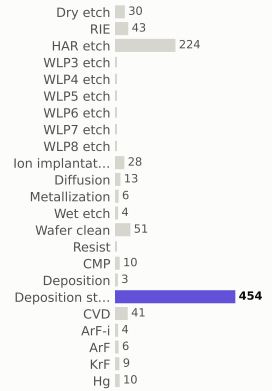

materials deposited (g)

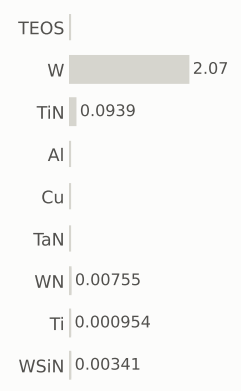

gases emitted (g)

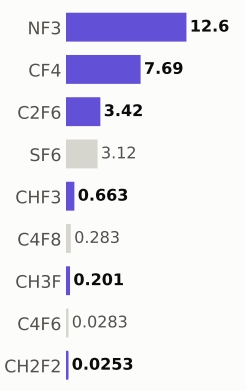

Step #11800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,269.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

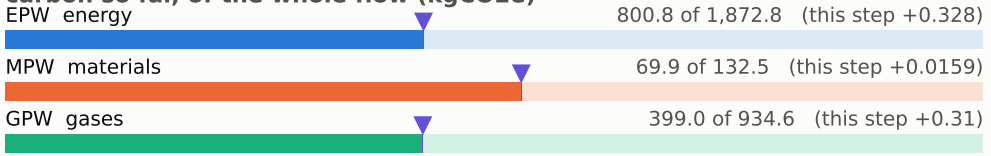

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

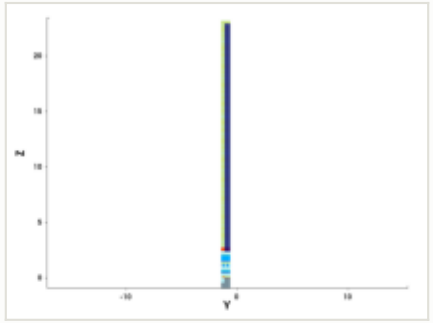

y cut at -1.035 µm

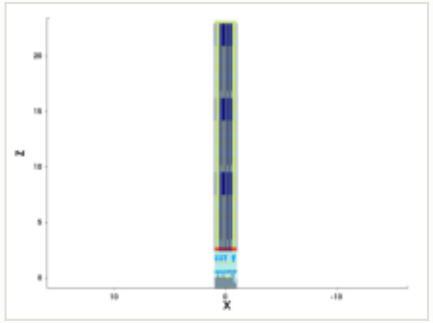

mask for this step

no mask for this step

steps by process area

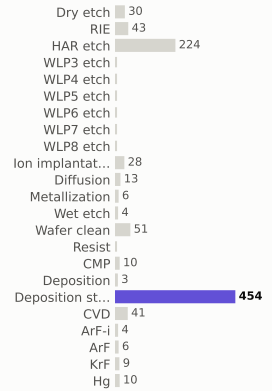

materials deposited (g)

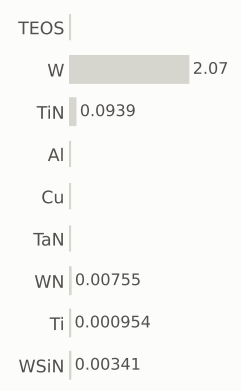

gases emitted (g)

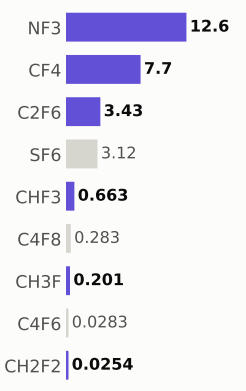

Step #11810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,270.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

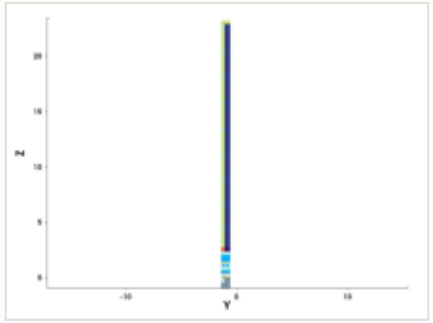

y cut at -1.035 µm

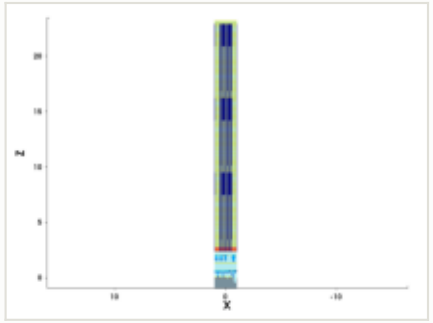

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 801.1 of 1,872.8 (this step +0.328)

MPW materials — 69.9 of 132.5 (this step +0.0159)

GPW gases — 399.3 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

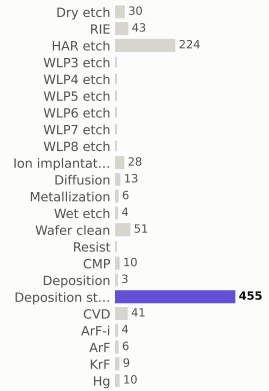

materials deposited (g)

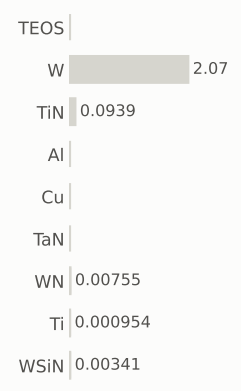

gases emitted (g)

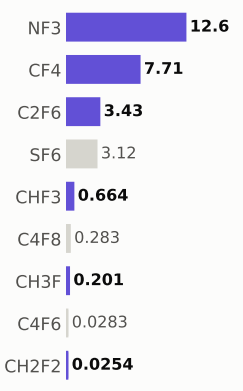

Step #11820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,270.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

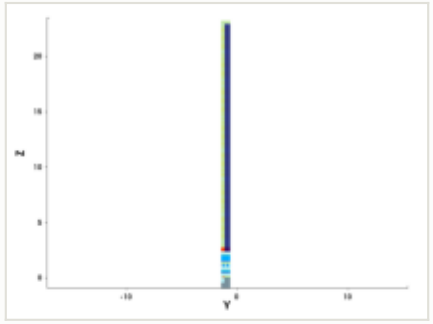

y cut at -1.035 µm

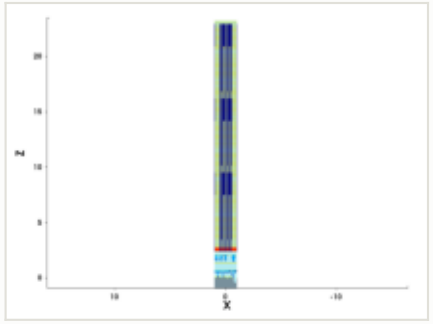

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

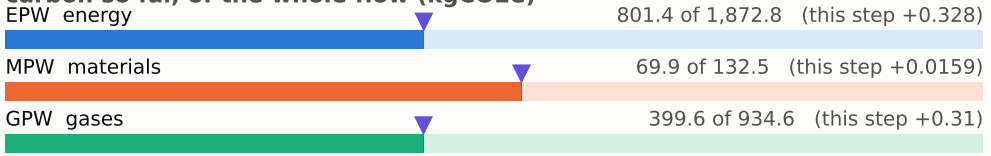

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

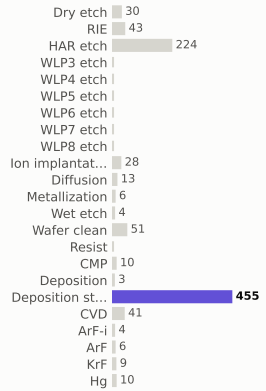

materials deposited (g)

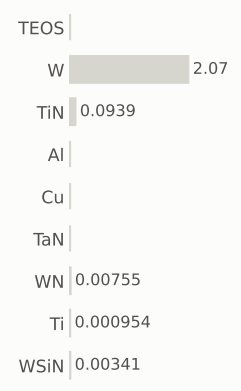

gases emitted (g)

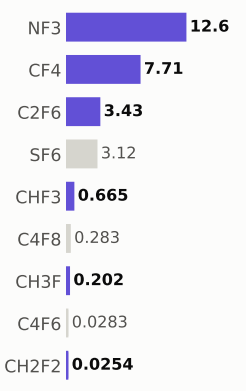

Step #11830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,271.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

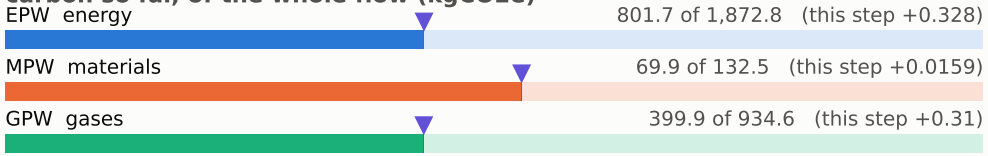

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

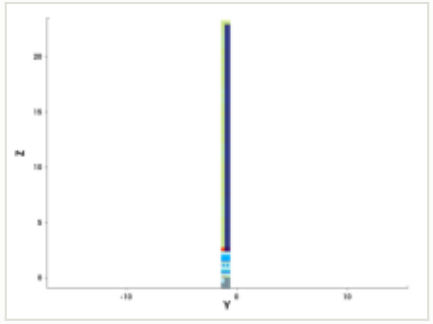

y cut at -1.035 µm

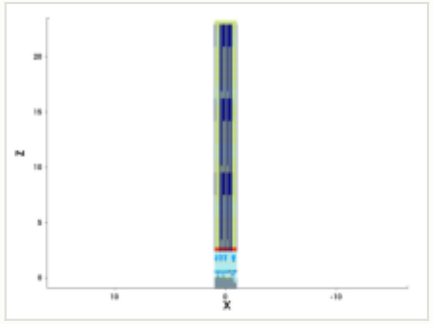

mask for this step

no mask for this step

steps by process area

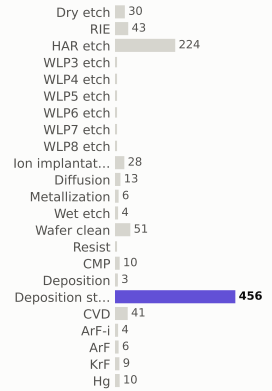

materials deposited (g)

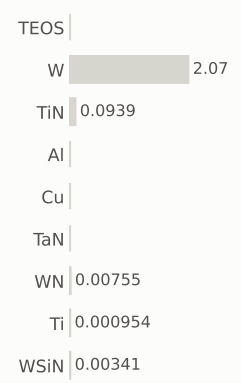

gases emitted (g)

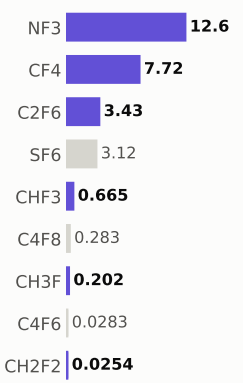

Step #11840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,272.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

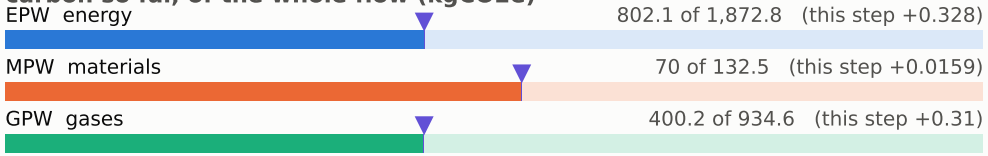

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

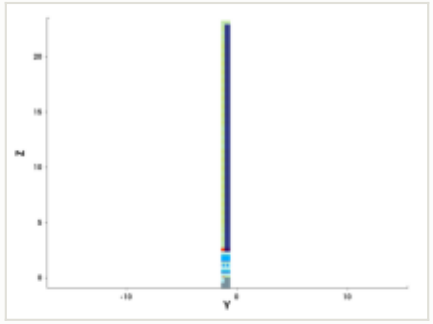

y cut at -1.035 µm

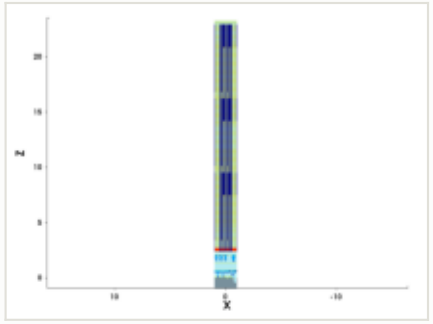

mask for this step

no mask for this step

steps by process area

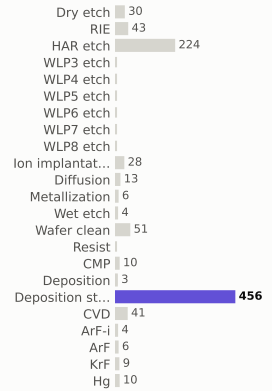

materials deposited (g)

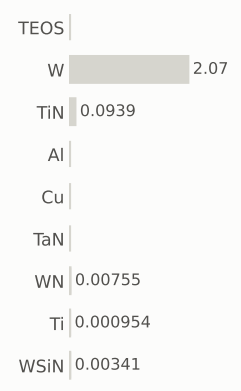

gases emitted (g)

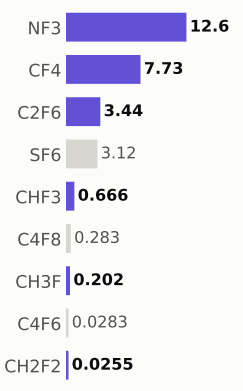

Step #11850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,272.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

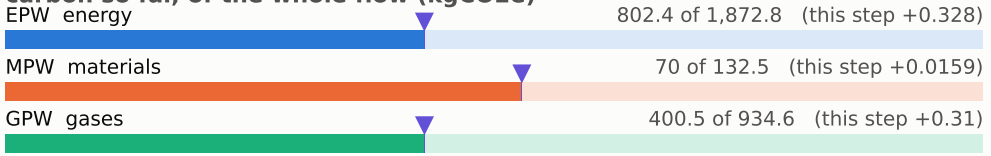

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

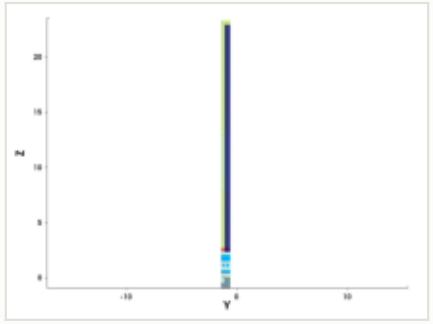

y cut at -1.035 µm

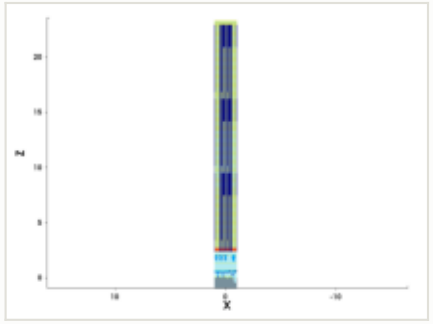

mask for this step

no mask for this step

steps by process area

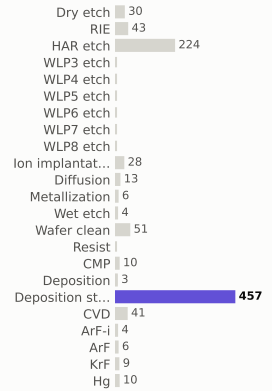

materials deposited (g)

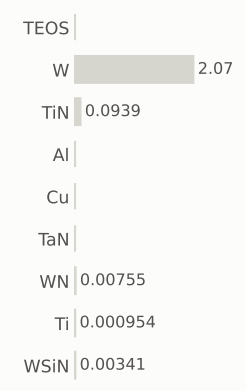

gases emitted (g)

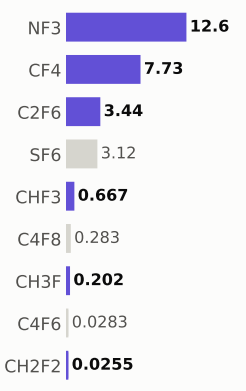

Step #11860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,273.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

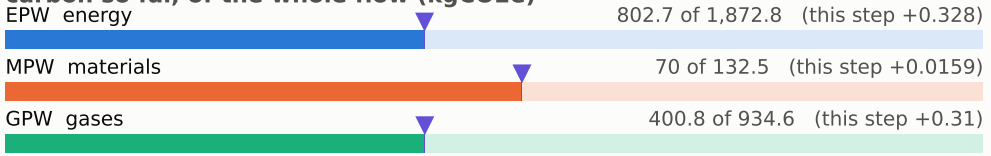

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

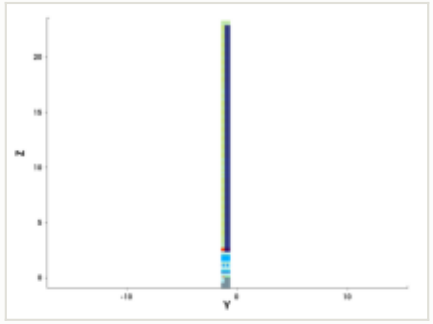

y cut at -1.035 µm

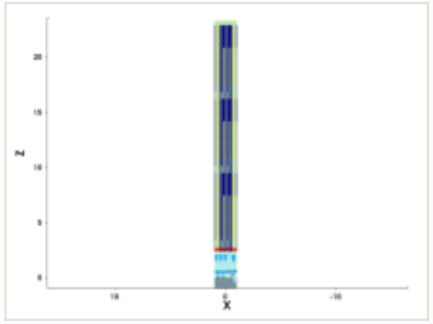

mask for this step

no mask for this step

steps by process area

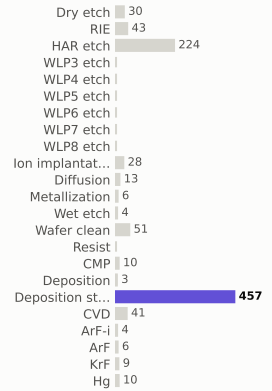

materials deposited (g)

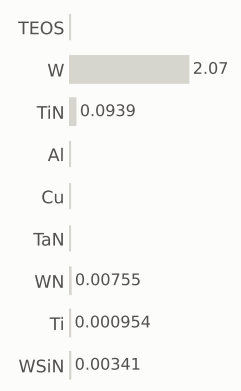

gases emitted (g)

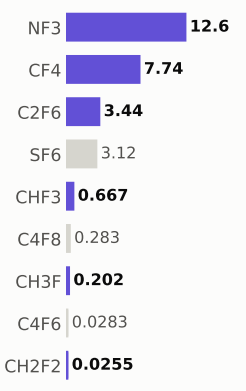

Step #11870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,274.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

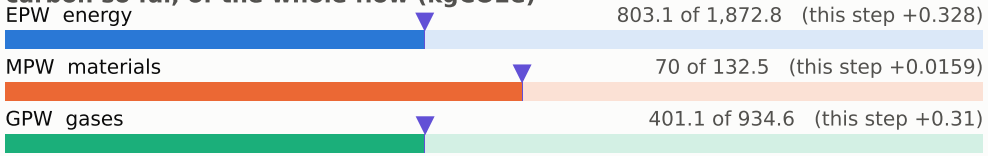

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

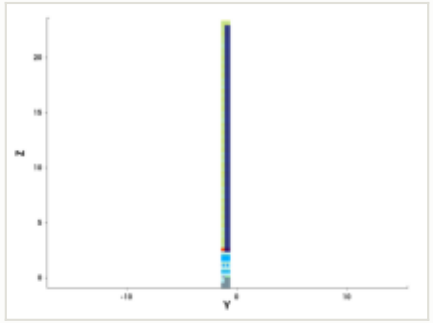

y cut at -1.035 µm

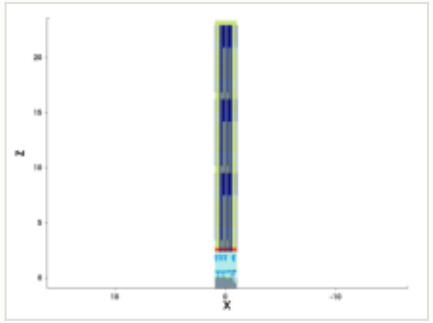

mask for this step

no mask for this step

steps by process area

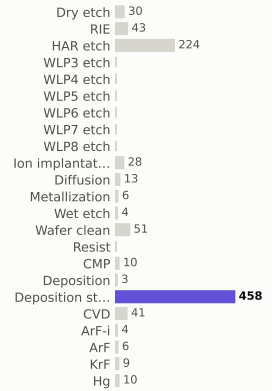

materials deposited (g)

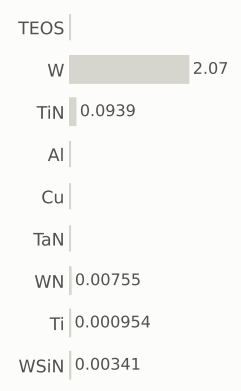

gases emitted (g)

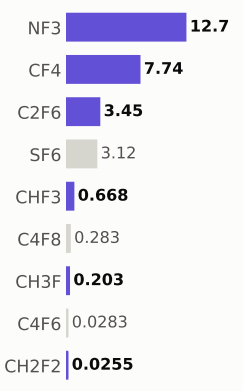

Step #11880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,274.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

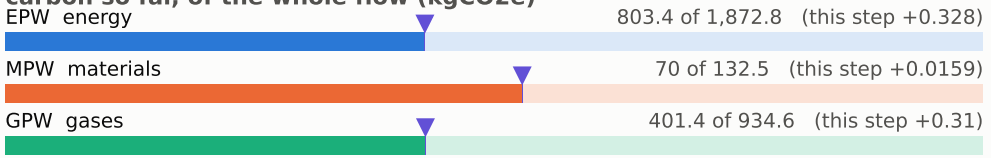

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

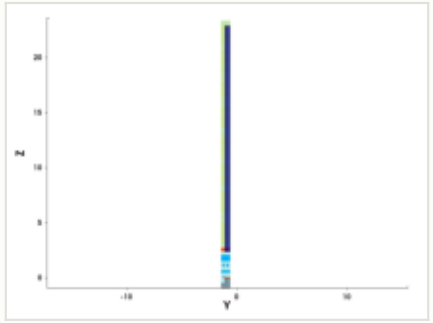

y cut at -1.035 µm

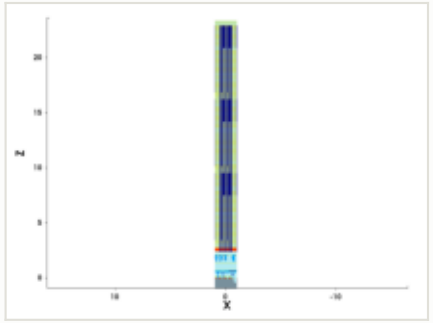

mask for this step

no mask for this step

steps by process area

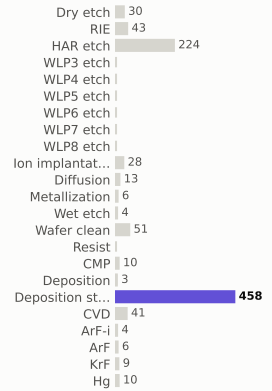

materials deposited (g)

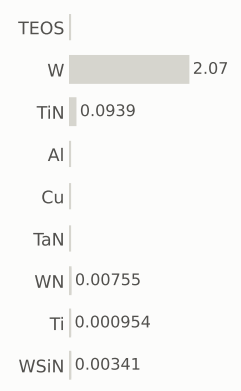

gases emitted (g)

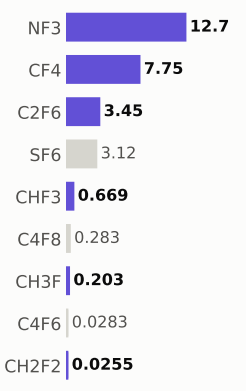

Step #11890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,275.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

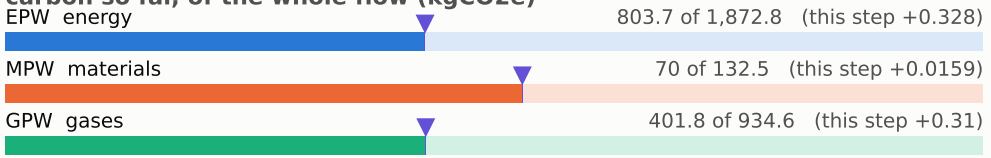

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

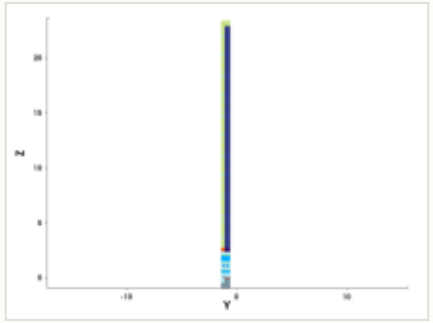

y cut at -1.035 µm

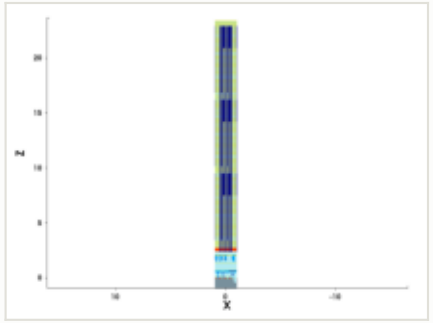

mask for this step

no mask for this step

steps by process area

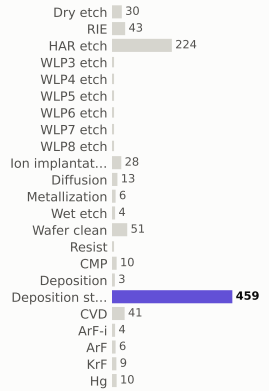

materials deposited (g)

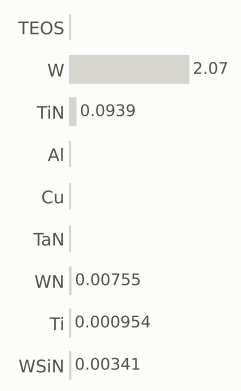

gases emitted (g)

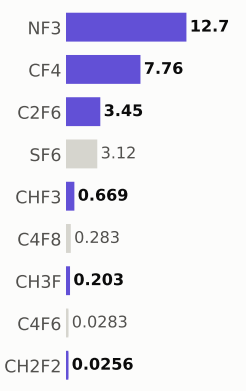

Step #11900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,276.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

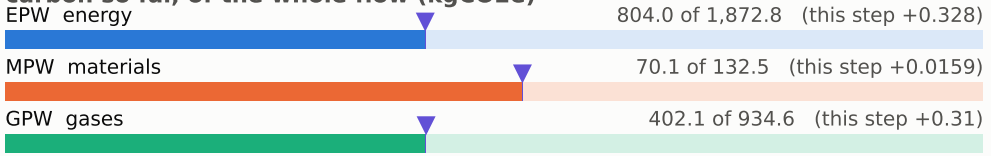

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

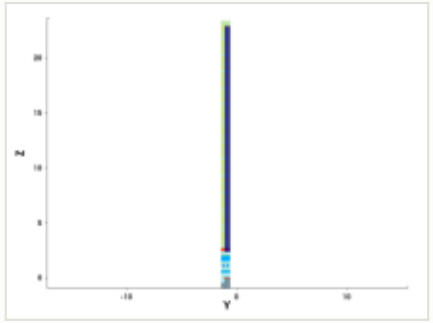

y cut at -1.035 µm

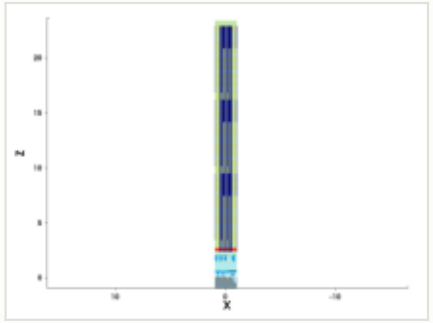

mask for this step

no mask for this step

steps by process area

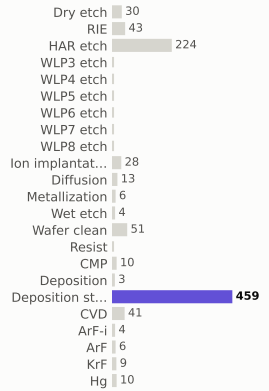

materials deposited (g)

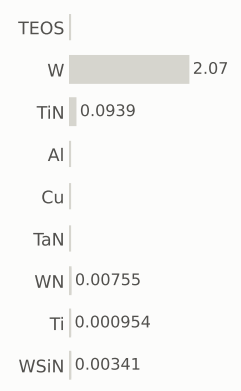

gases emitted (g)

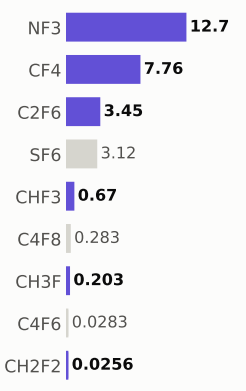

Step #11910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,276.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

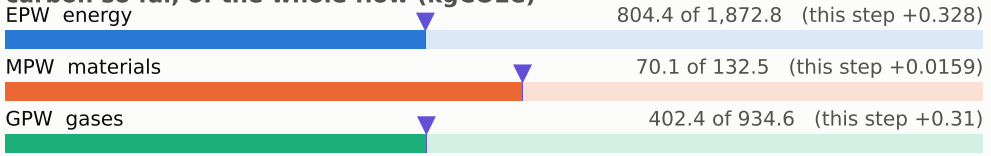

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

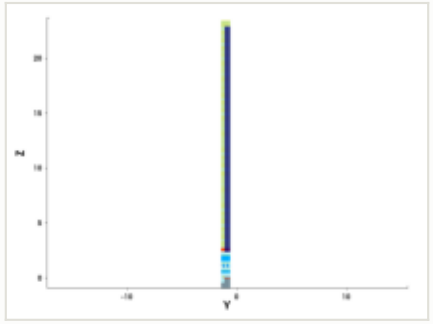

y cut at -1.035 µm

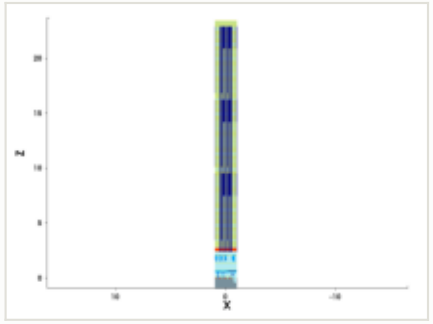

mask for this step

no mask for this step

steps by process area

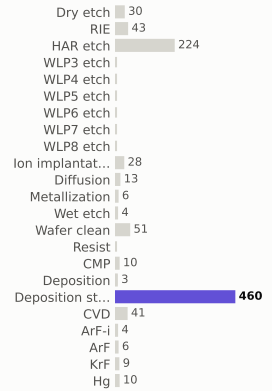

materials deposited (g)

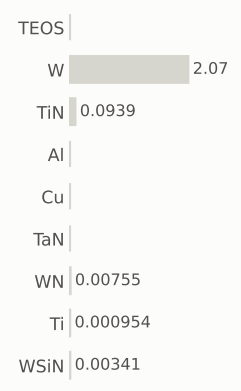

gases emitted (g)

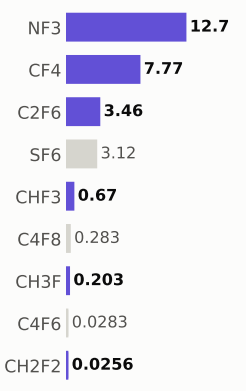

Step #11920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,277.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 804.7 of 1,872.8 (this step +0.328)

MPW materials — 70.1 of 132.5 (this step +0.0159)

GPW gases — 402.7 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

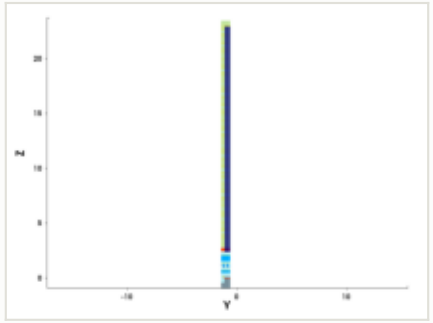

y cut at -1.035 µm

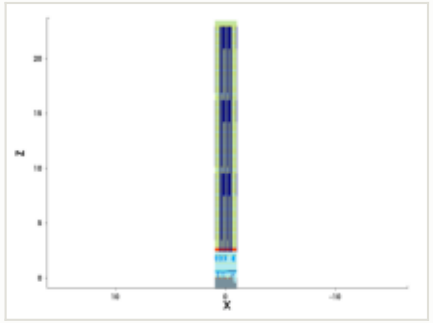

mask for this step

no mask for this step

steps by process area

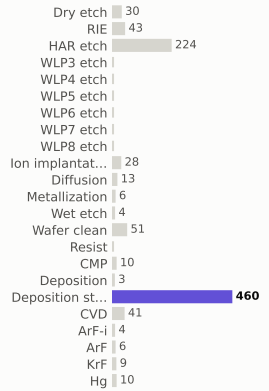

materials deposited (g)

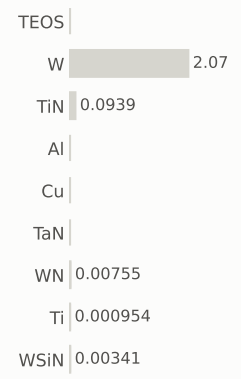

gases emitted (g)

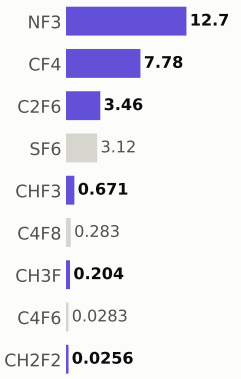

Step #11930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,278.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

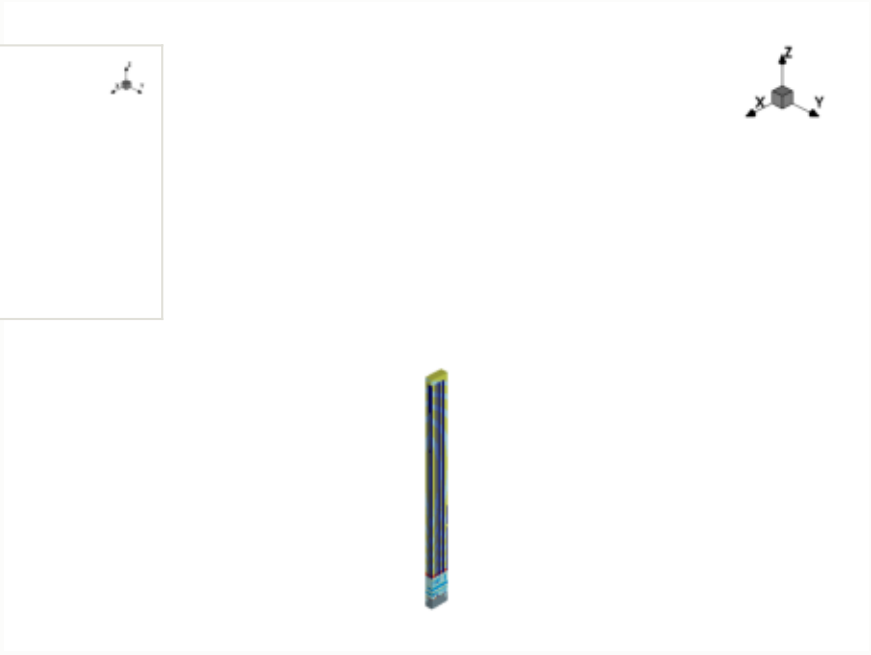

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

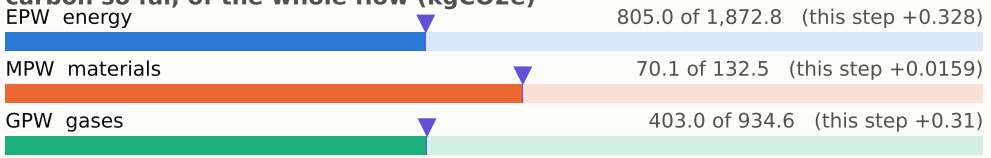

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

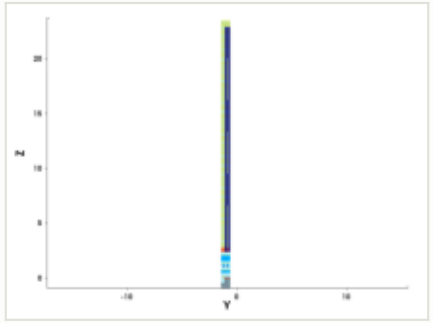

y cut at -1.035 µm

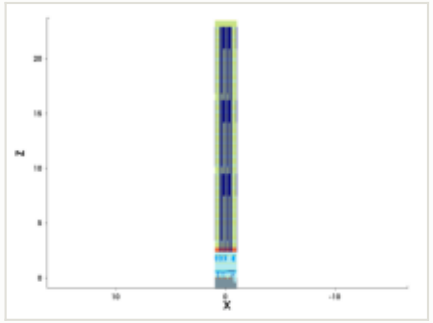

mask for this step

no mask for this step

steps by process area

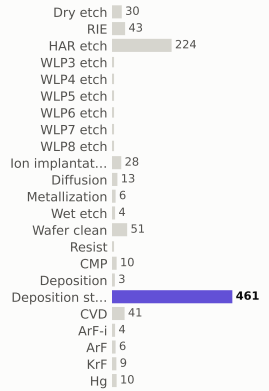

materials deposited (g)

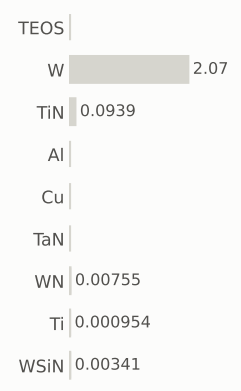

gases emitted (g)

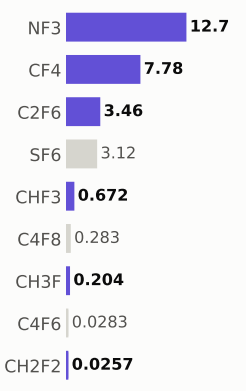

Step #11940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,278.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

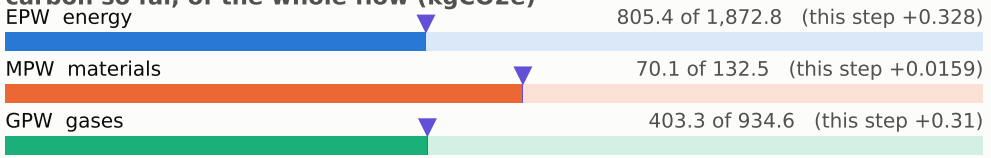

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

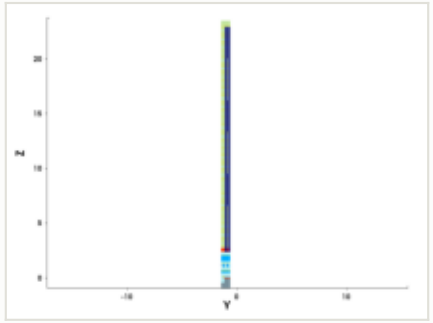

y cut at -1.035 µm

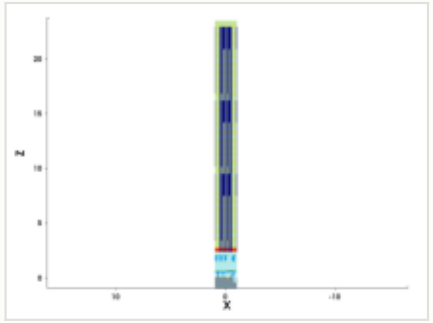

mask for this step

no mask for this step

steps by process area

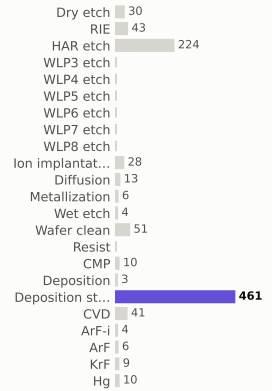

materials deposited (g)

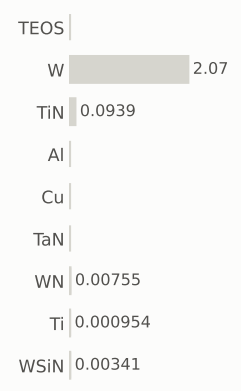

gases emitted (g)

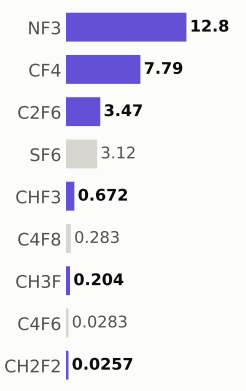

Step #11950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,279.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

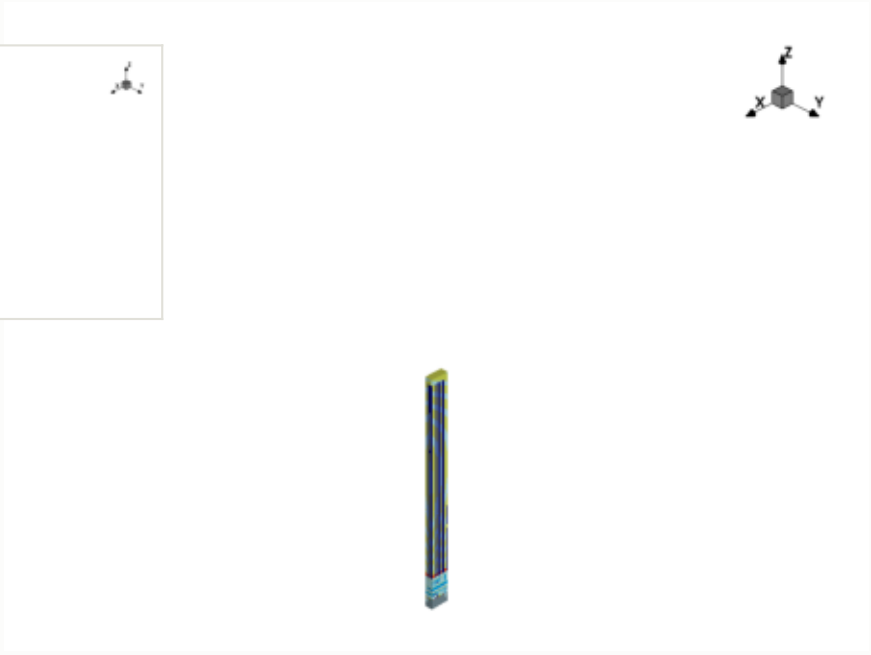

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

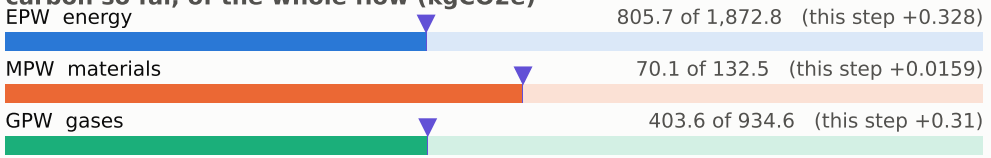

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

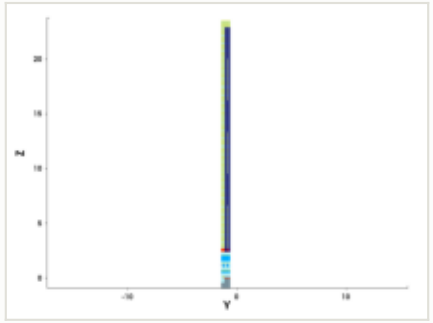

y cut at -1.035 µm

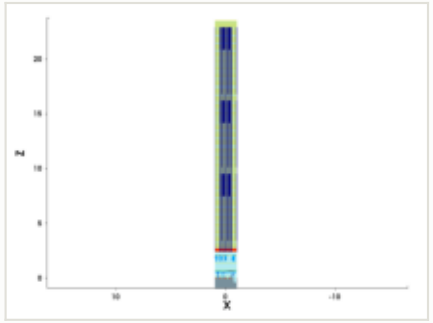

mask for this step

no mask for this step

steps by process area

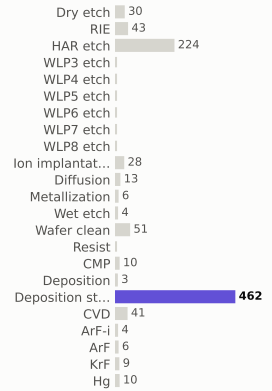

materials deposited (g)

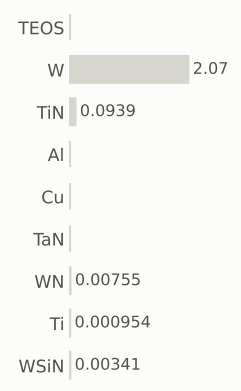

gases emitted (g)

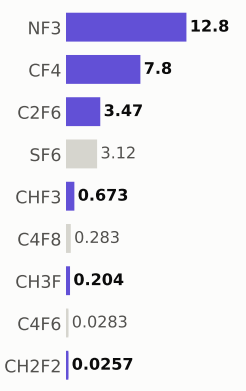

Step #11960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,280.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

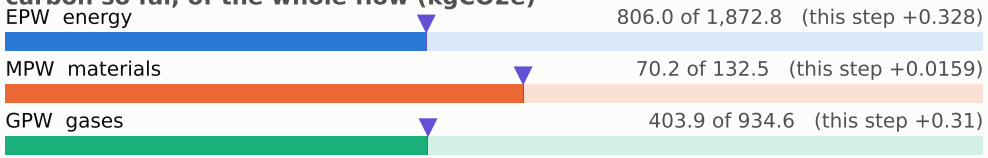

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

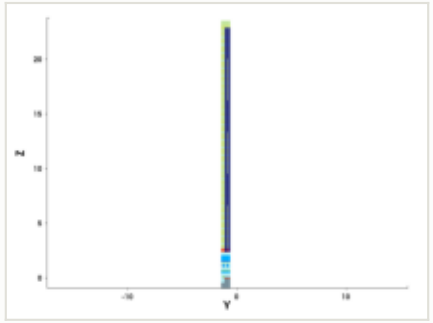

y cut at -1.035 µm

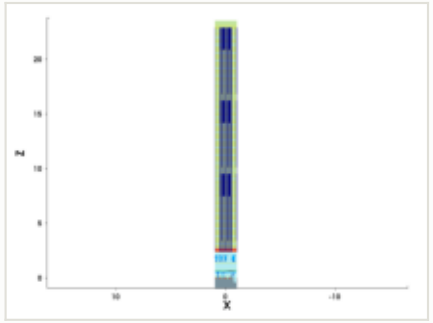

mask for this step

no mask for this step

steps by process area

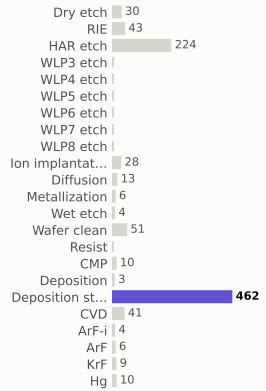

materials deposited (g)

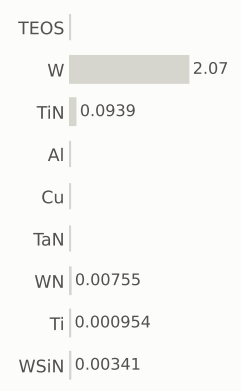

gases emitted (g)

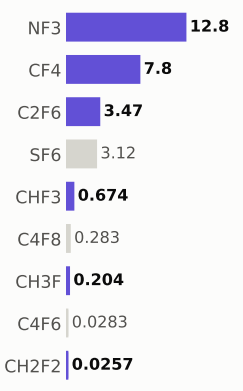

Step #11970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,280.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

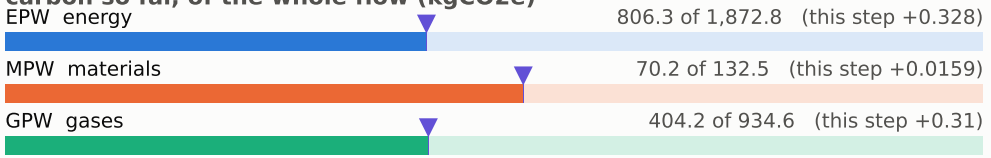

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

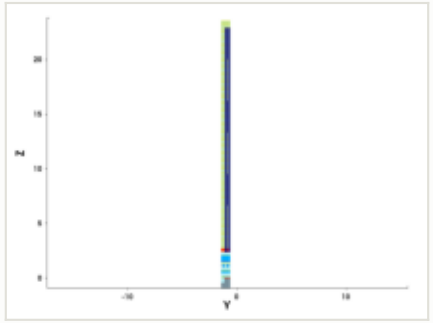

y cut at -1.035 µm

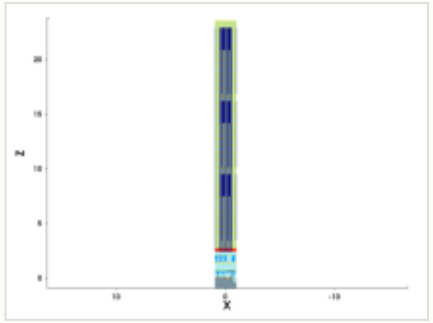

mask for this step

no mask for this step

steps by process area

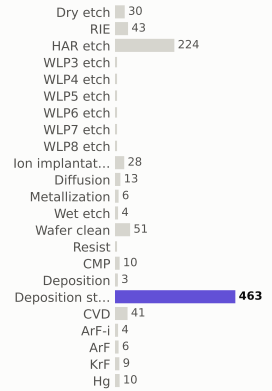

materials deposited (g)

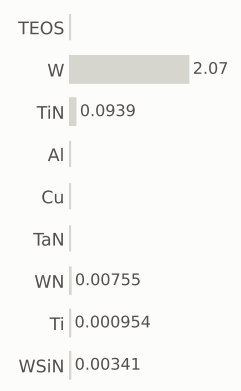

gases emitted (g)

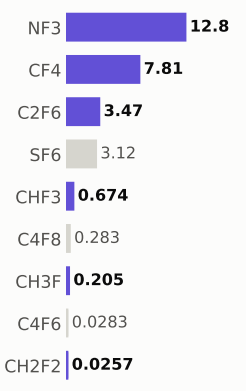

Step #11980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,281.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

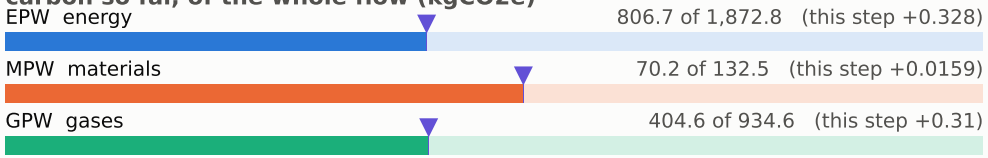

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

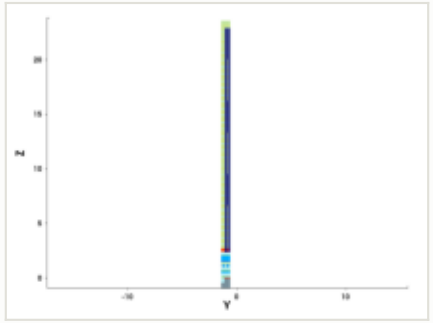

y cut at -1.035 µm

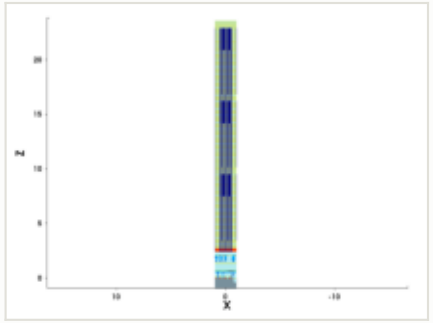

mask for this step

no mask for this step

steps by process area

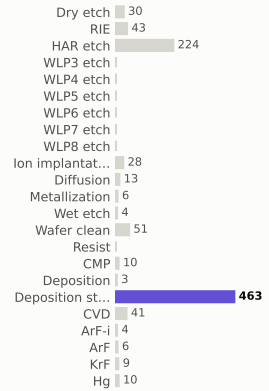

materials deposited (g)

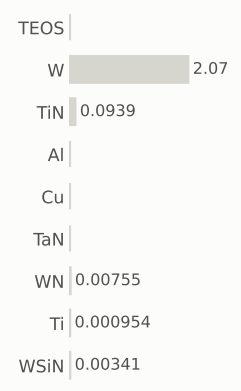

gases emitted (g)

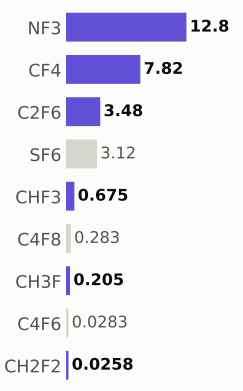

Step #11990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,282.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

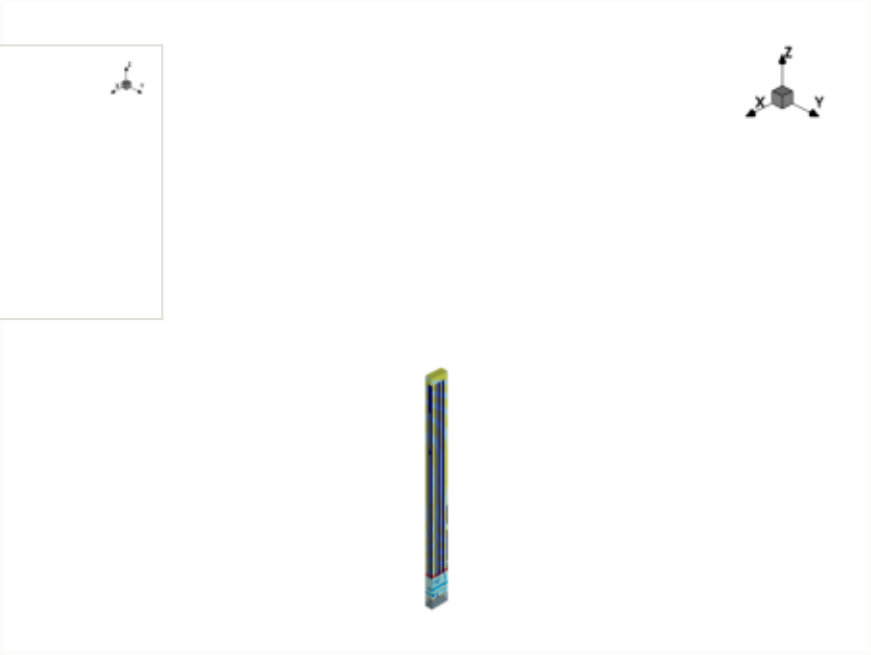

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

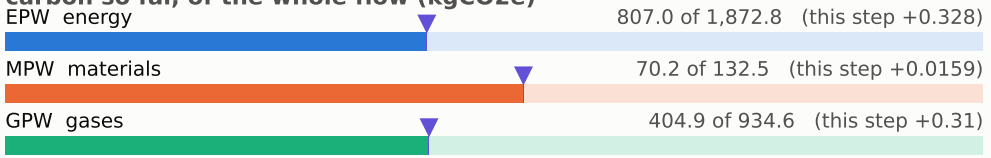

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

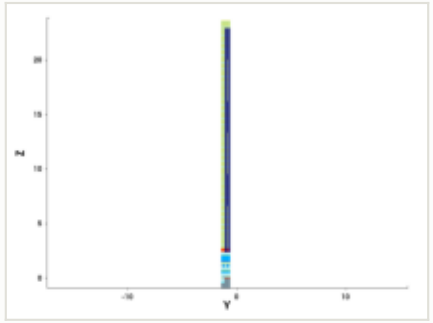

y cut at -1.035 µm

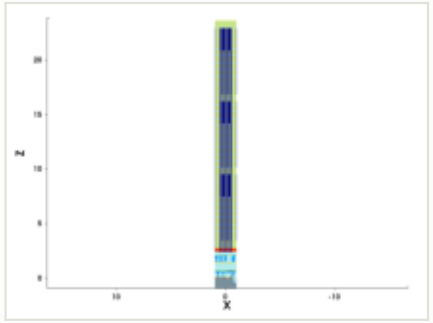

mask for this step

no mask for this step

steps by process area

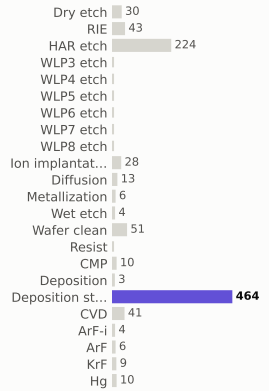

materials deposited (g)

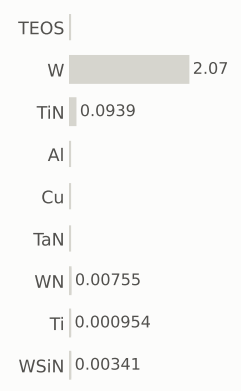

gases emitted (g)

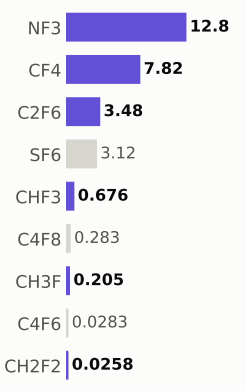

Step #12000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,282.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

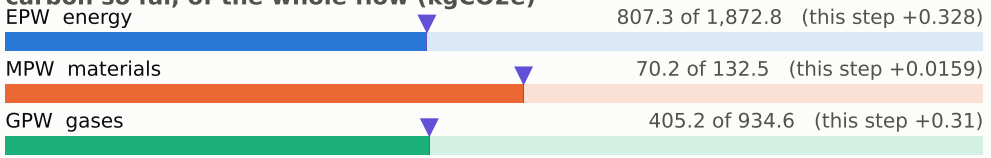

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

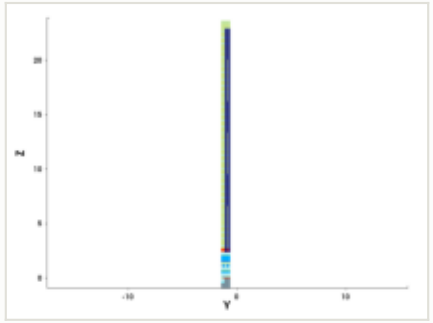

y cut at -1.035 µm

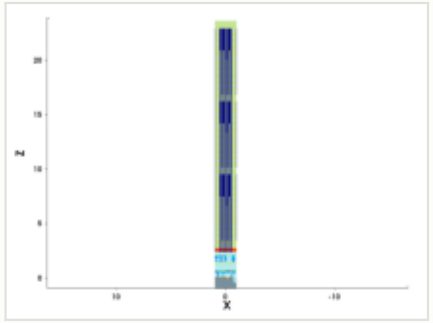

mask for this step

no mask for this step

steps by process area

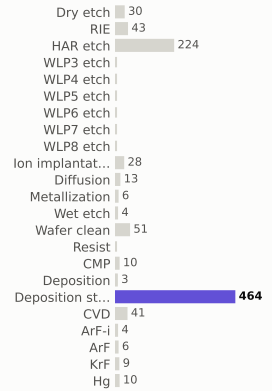

materials deposited (g)

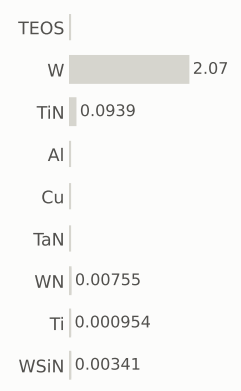

gases emitted (g)

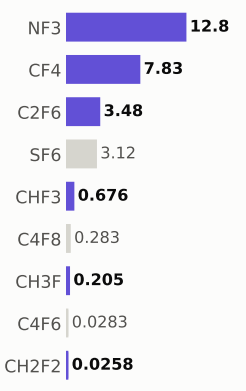

Step #12010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,283.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

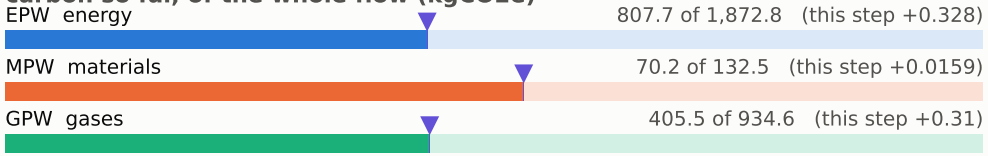

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

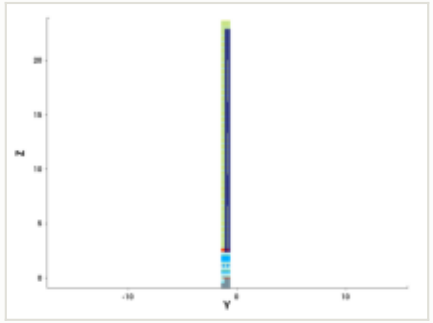

y cut at -1.035 µm

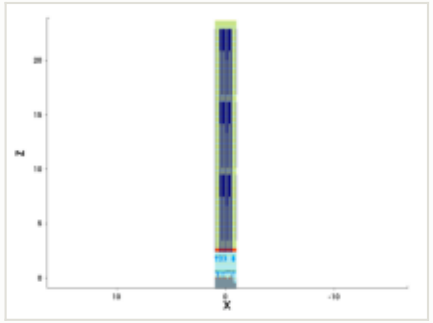

mask for this step

no mask for this step

steps by process area

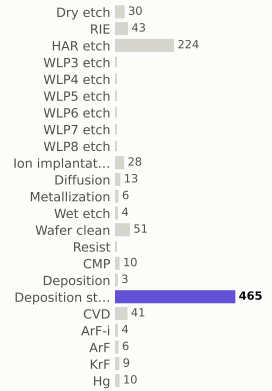

materials deposited (g)

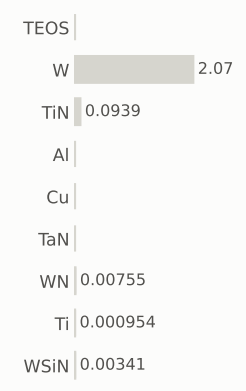

gases emitted (g)

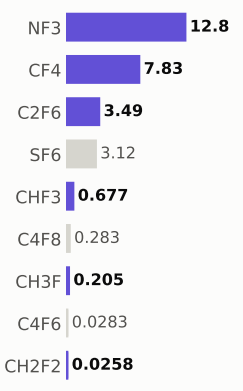

Step #12020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,284.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

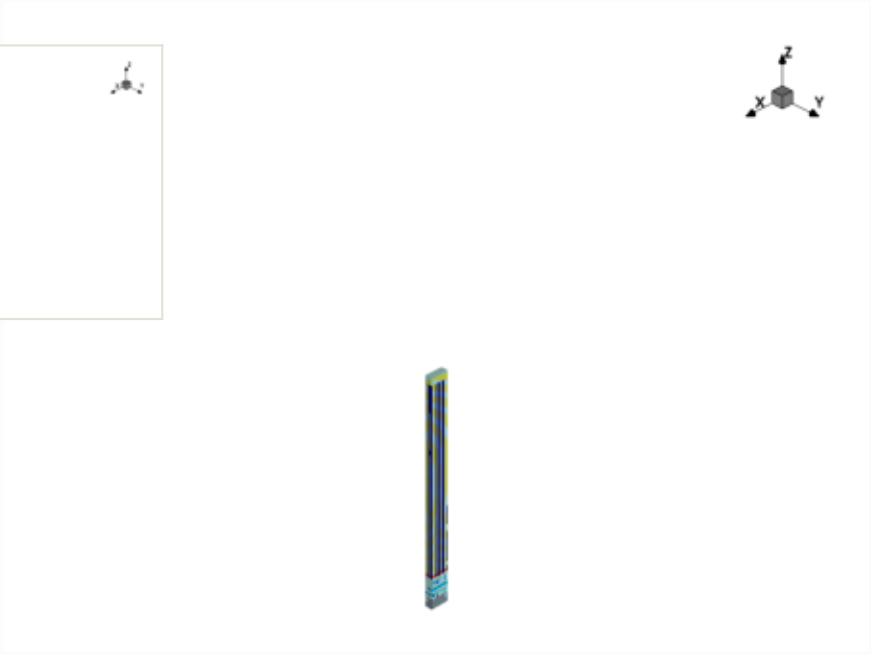

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

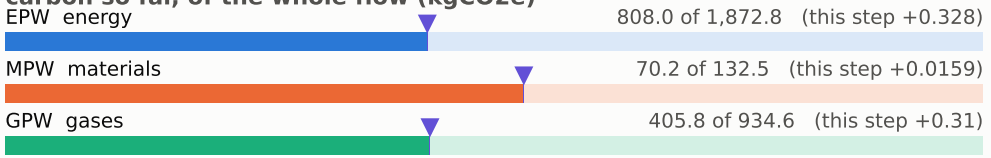

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

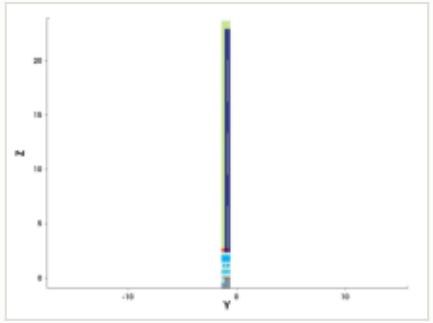

y cut at -1.035 µm

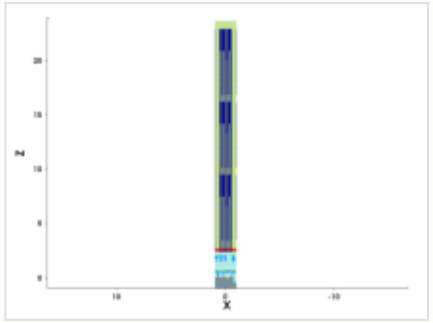

mask for this step

no mask for this step

steps by process area

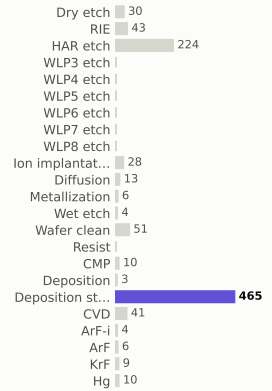

materials deposited (g)

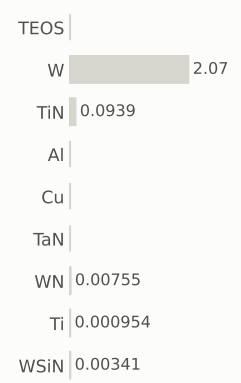

gases emitted (g)

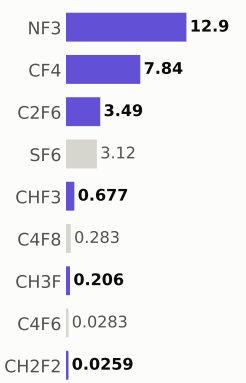

Step #12030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,284.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

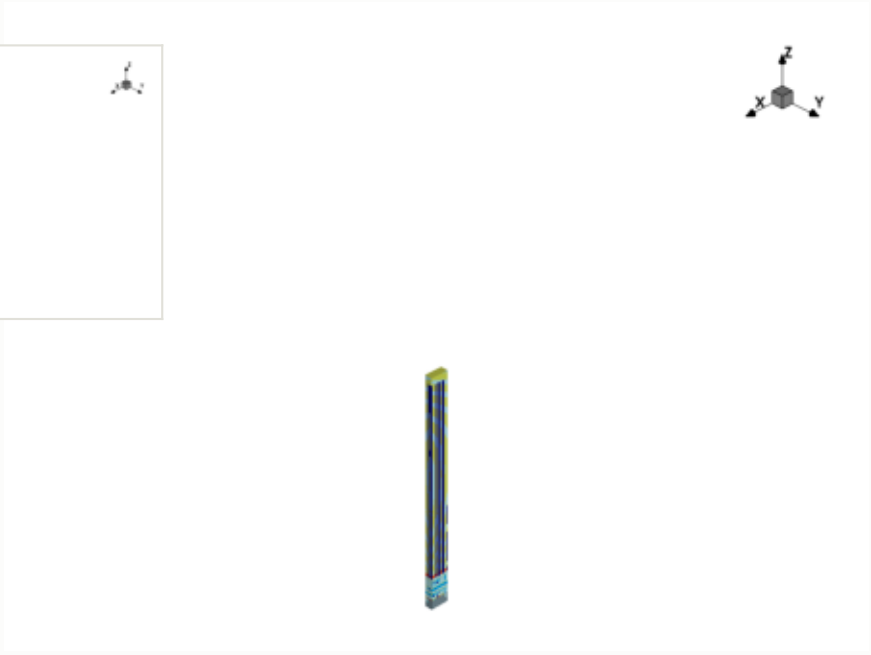

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

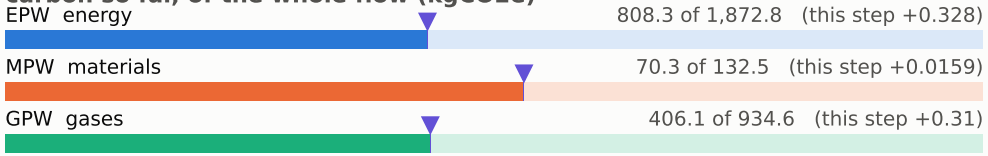

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

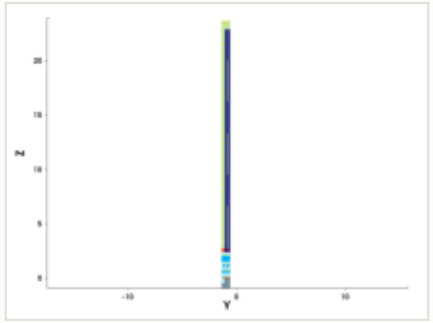

y cut at -1.035 µm

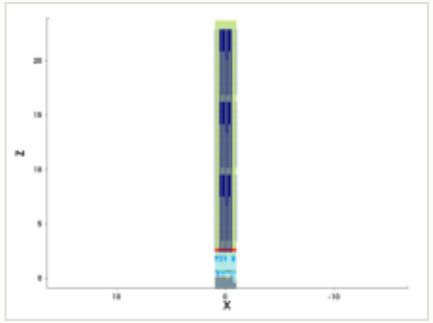

mask for this step

no mask for this step

steps by process area

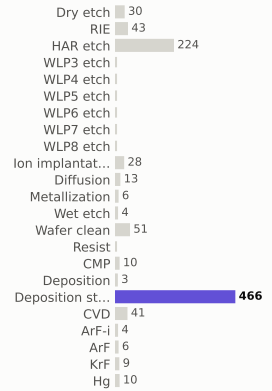

materials deposited (g)

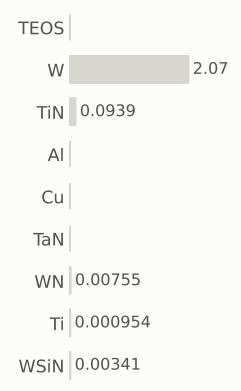

gases emitted (g)

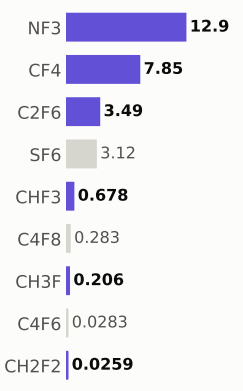

Step #12040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,285.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

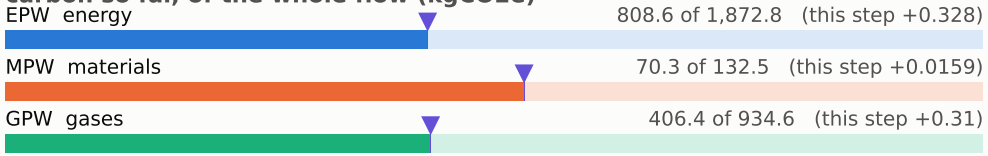

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

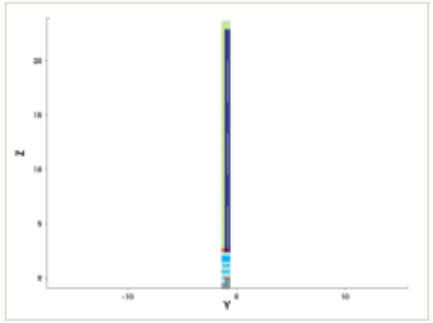

y cut at -1.035 µm

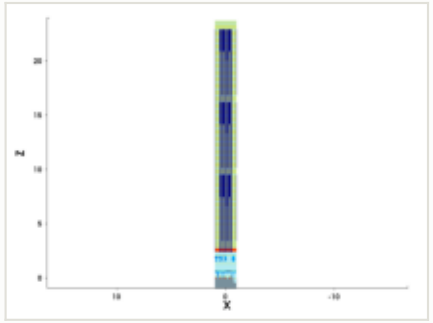

mask for this step

no mask for this step

steps by process area

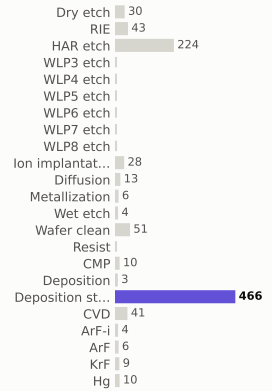

materials deposited (g)

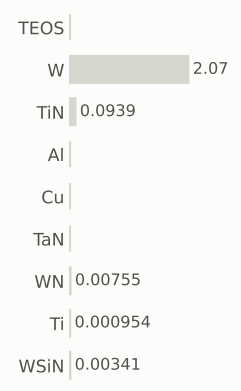

gases emitted (g)

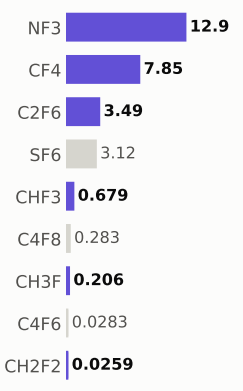

Step #12050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,286.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

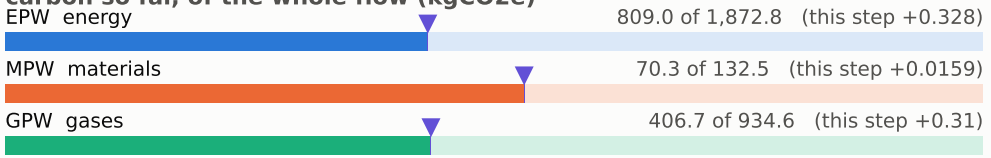

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

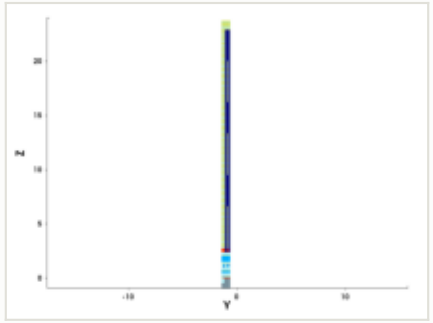

y cut at -1.035 µm

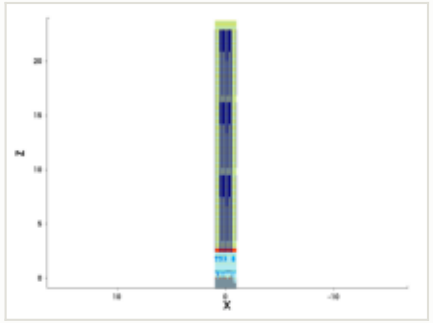

mask for this step

no mask for this step

steps by process area

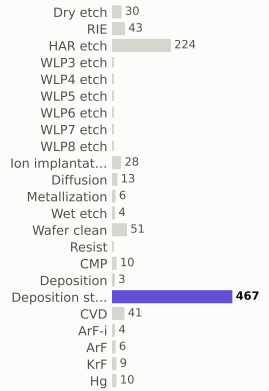

materials deposited (g)

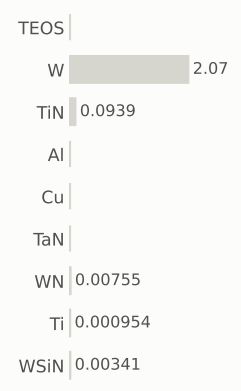

gases emitted (g)

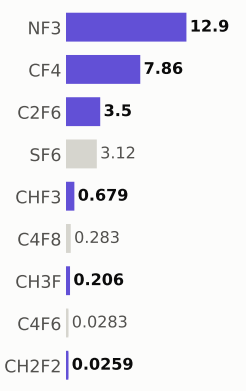

Step #12060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,286.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

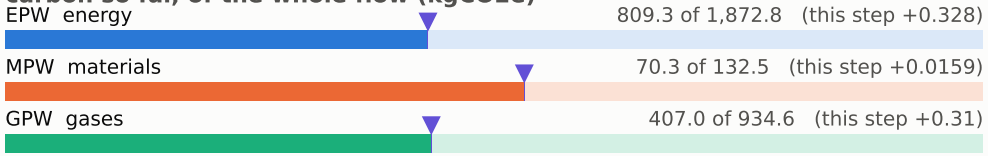

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

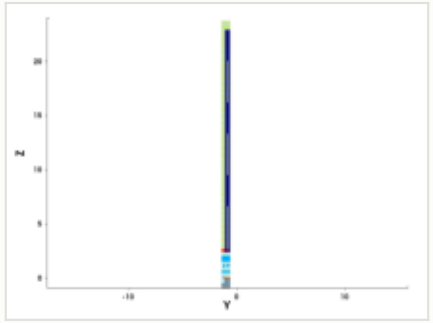

y cut at -1.035 µm

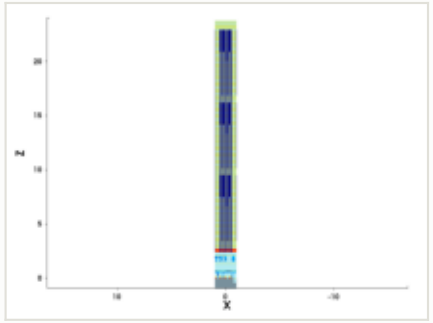

mask for this step

no mask for this step

steps by process area

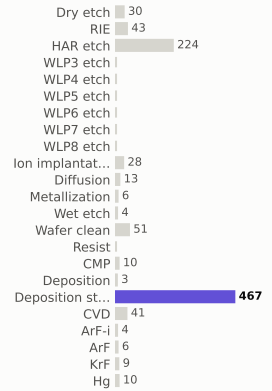

materials deposited (g)

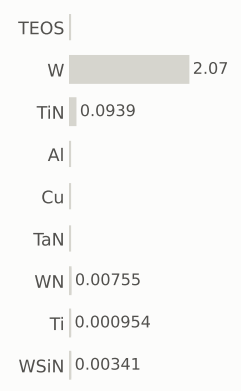

gases emitted (g)

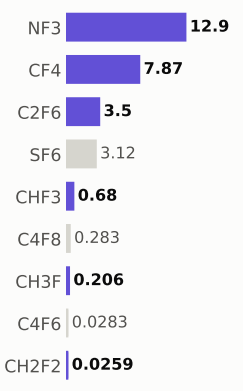

Step #12070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,287.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

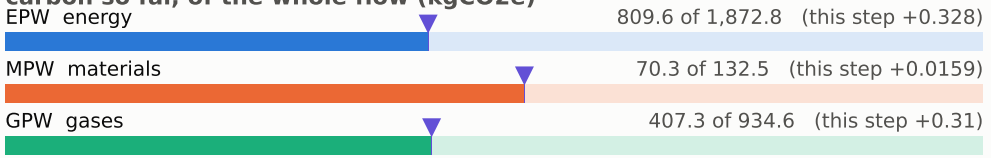

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

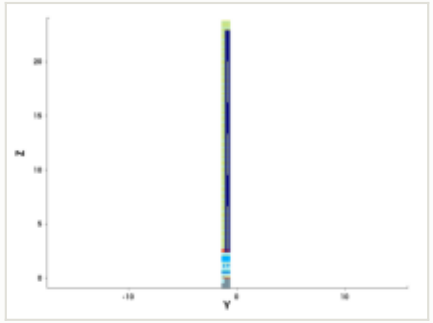

y cut at -1.035 µm

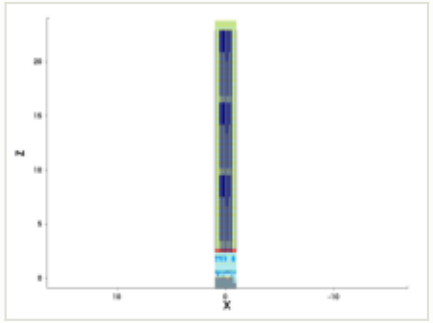

mask for this step

no mask for this step

steps by process area

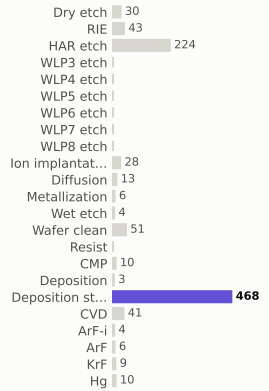

materials deposited (g)

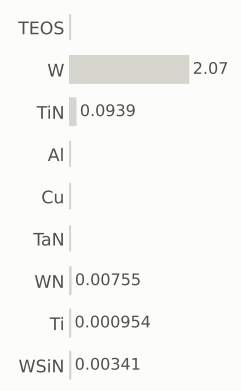

gases emitted (g)

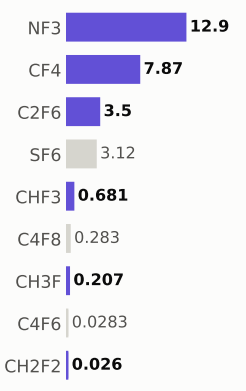

Step #12080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,287.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

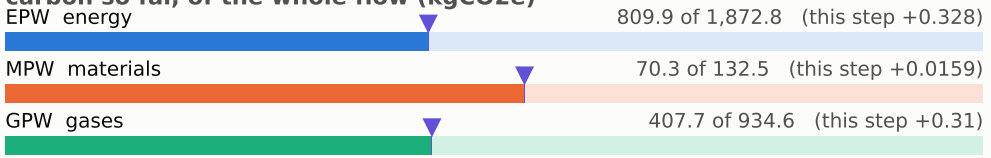

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

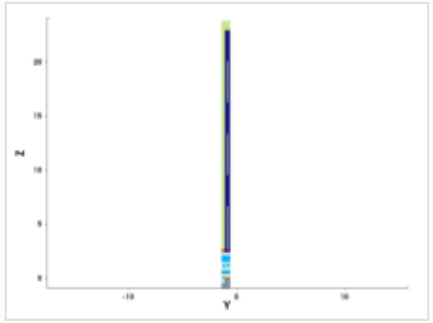

y cut at -1.035 µm

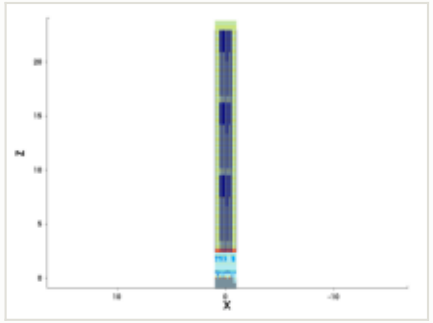

mask for this step

no mask for this step

steps by process area

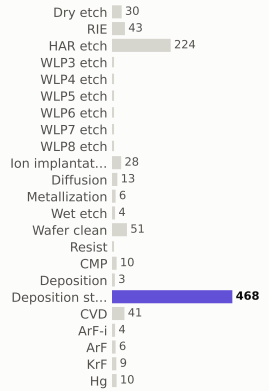

materials deposited (g)

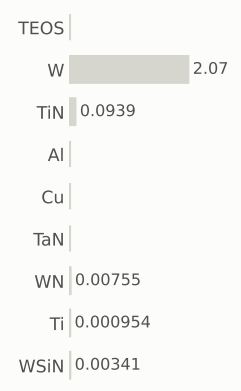

gases emitted (g)



Step #12090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,288.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

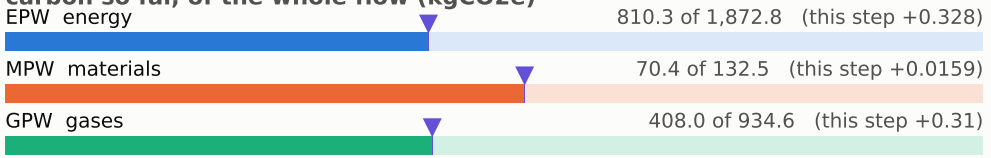

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

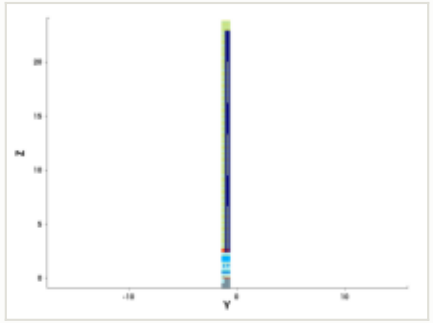

y cut at -1.035 µm

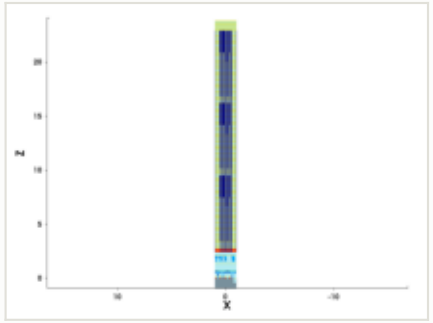

mask for this step

no mask for this step

steps by process area

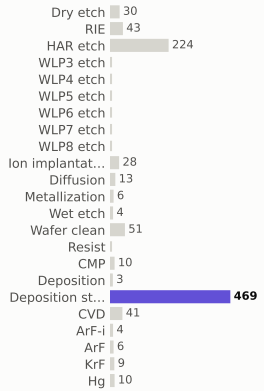

materials deposited (g)

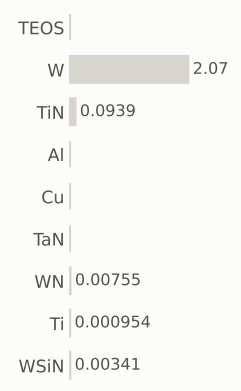

gases emitted (g)

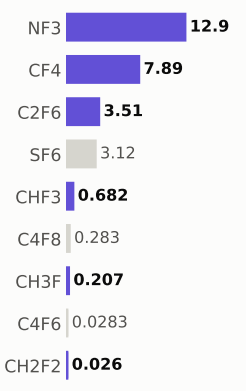

Step #12100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,289.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

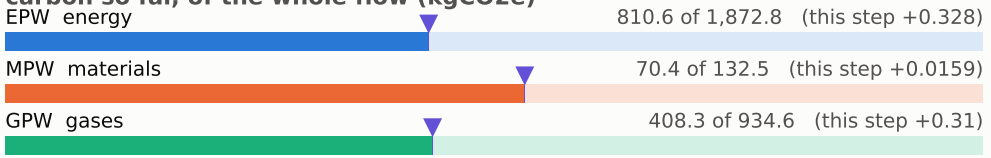

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

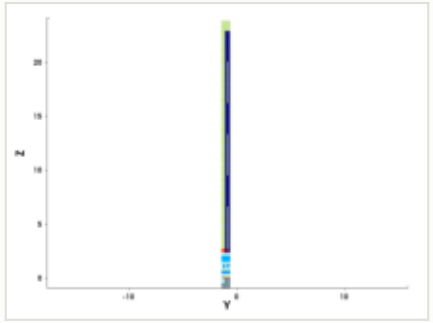

y cut at -1.035 µm

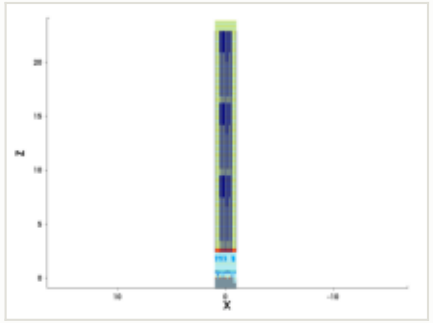

mask for this step

no mask for this step

steps by process area

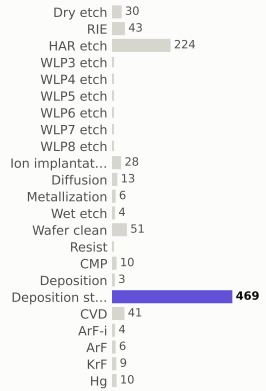

materials deposited (g)

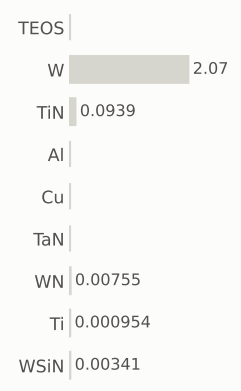

gases emitted (g)

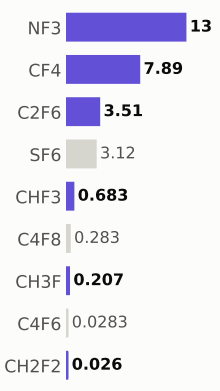

Step #12110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,289.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

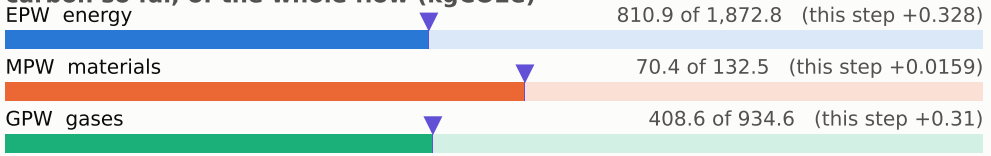

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

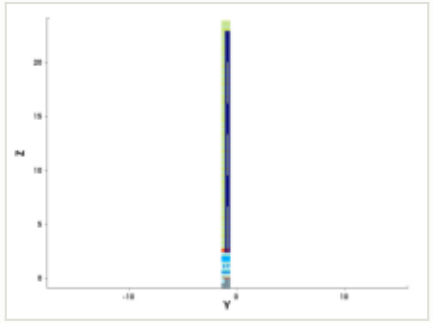

y cut at -1.035 µm

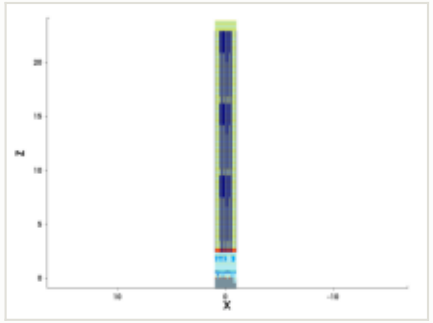

mask for this step

no mask for this step

steps by process area

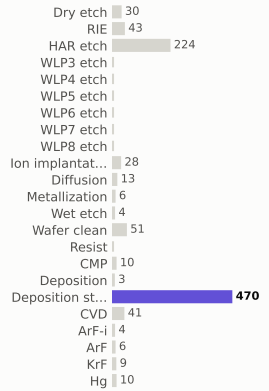

materials deposited (g)

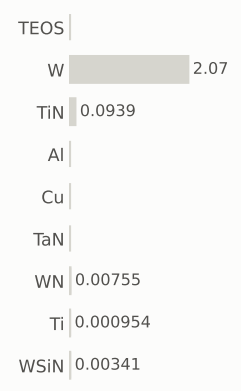

gases emitted (g)



Step #12120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,290.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

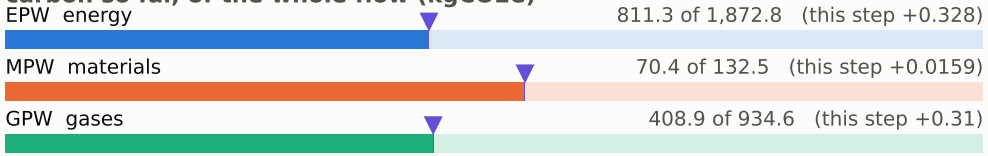

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

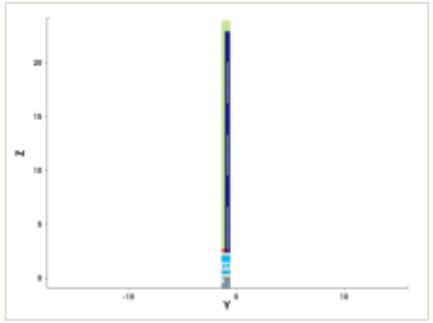

y cut at -1.035 µm

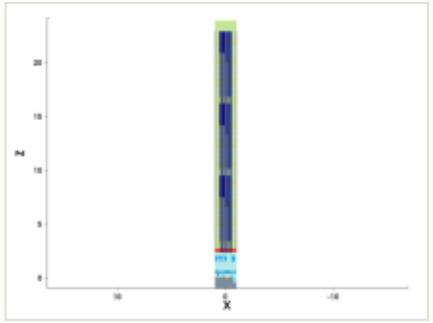

mask for this step

no mask for this step

steps by process area

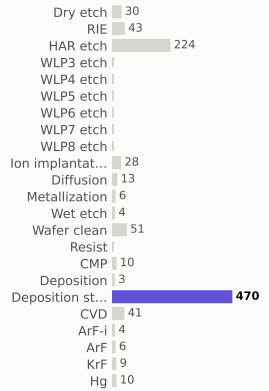

materials deposited (g)

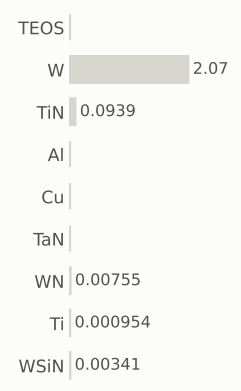

gases emitted (g)



Step #12130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,291.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

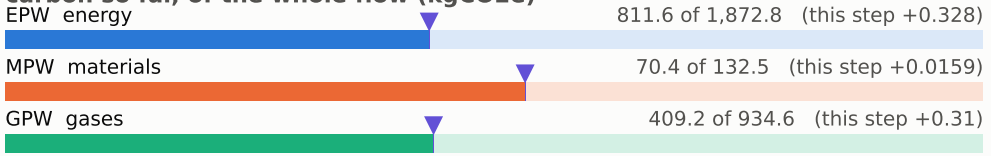

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

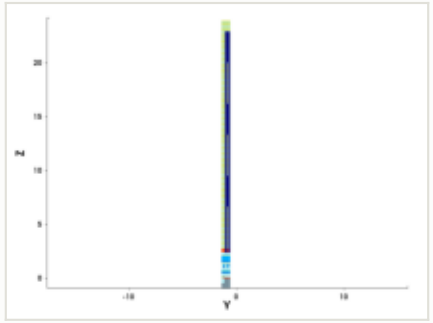

y cut at -1.035 µm

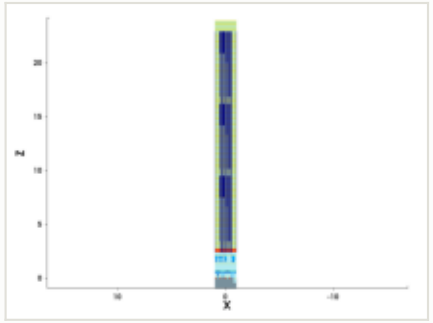

mask for this step

no mask for this step

steps by process area

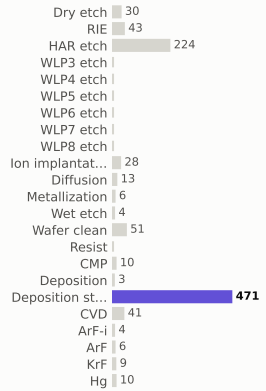

materials deposited (g)

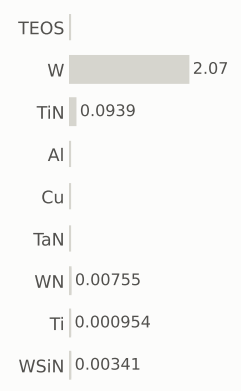

gases emitted (g)

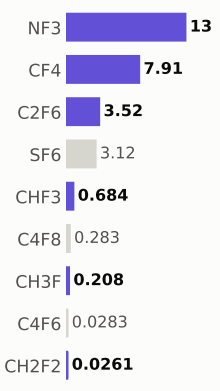

Step #12140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,291.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

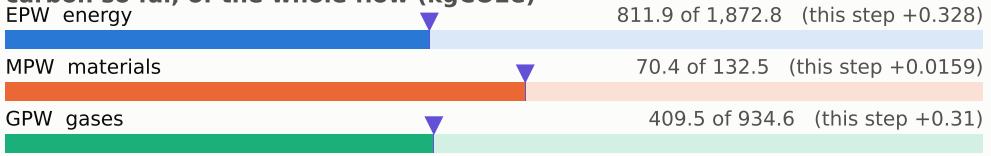

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

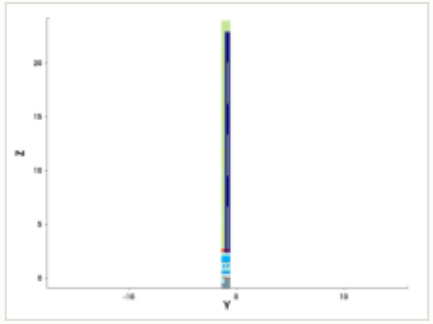

y cut at -1.035 µm

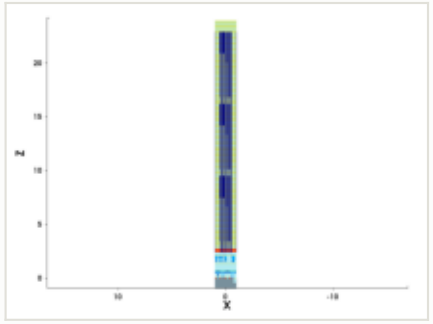

mask for this step

no mask for this step

steps by process area

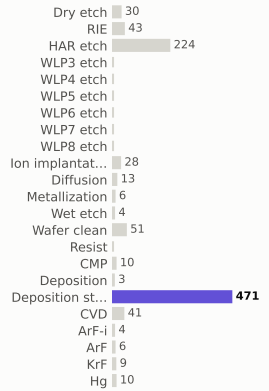

materials deposited (g)

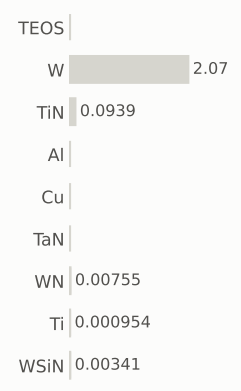

gases emitted (g)

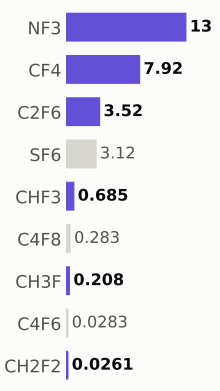

Step #12150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,292.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

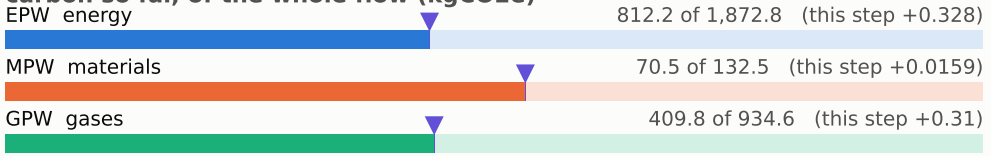

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

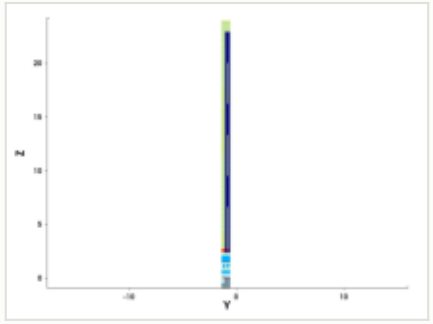

y cut at -1.035 µm

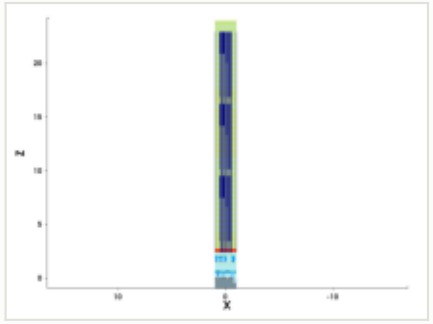

mask for this step

no mask for this step

steps by process area

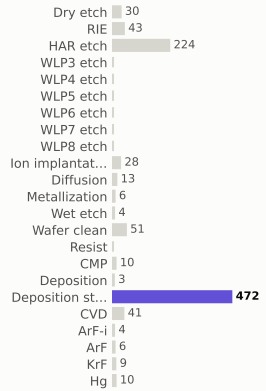

materials deposited (g)

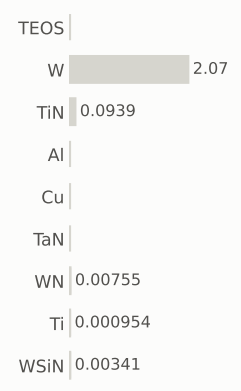

gases emitted (g)

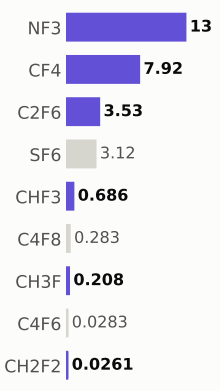

Step #12160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,293.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

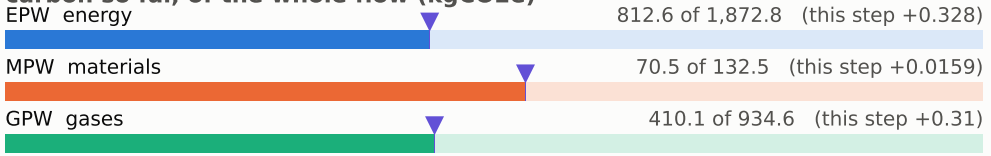

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

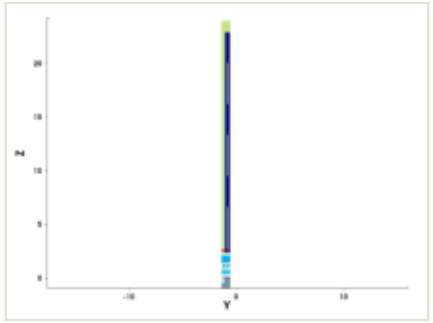

y cut at -1.035 µm

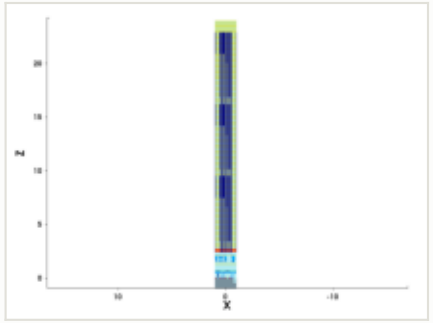

mask for this step

no mask for this step

steps by process area

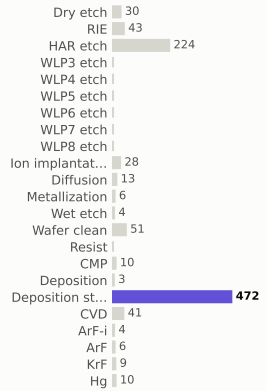

materials deposited (g)

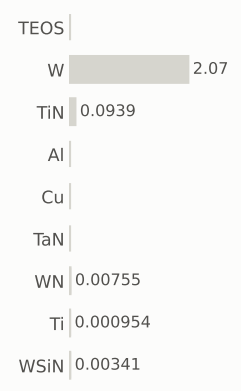

gases emitted (g)

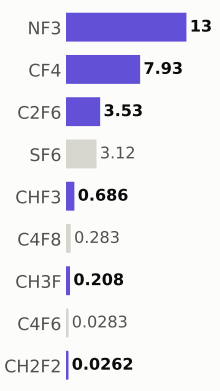

Step #12170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,293.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

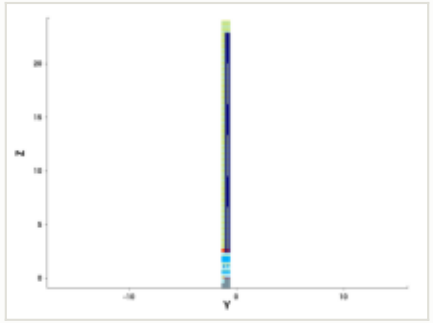

y cut at -1.035 µm

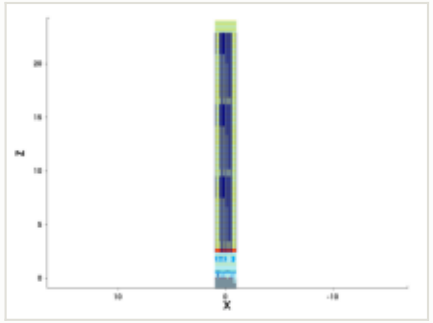

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 812.9 of 1,872.8 (this step +0.328)

MPW materials — 70.5 of 132.5 (this step +0.0159)

GPW gases — 410.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

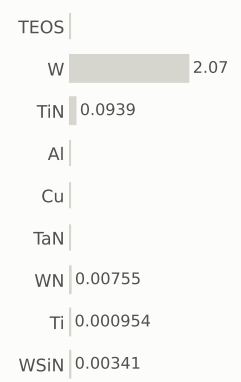

gases emitted (g)

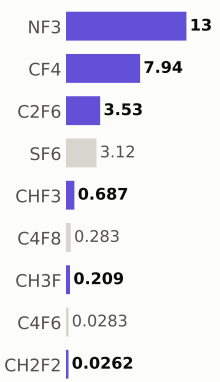

Step #12180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,294.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

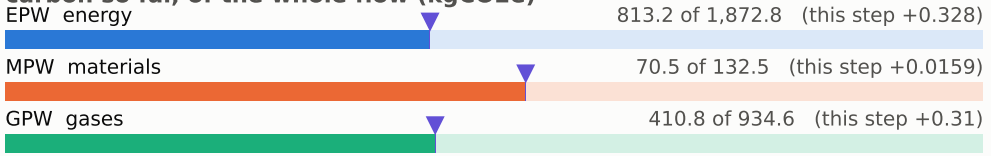

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

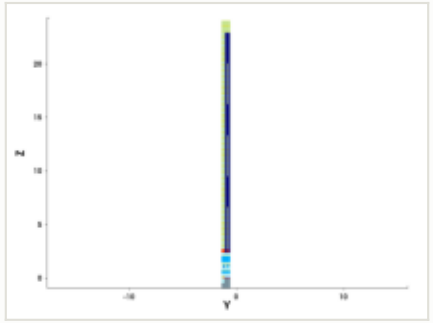

y cut at -1.035 µm

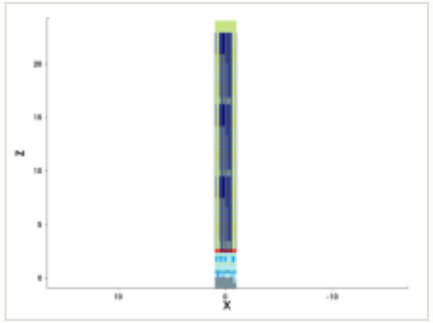

mask for this step

no mask for this step

steps by process area

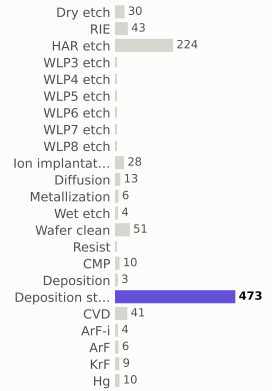

materials deposited (g)

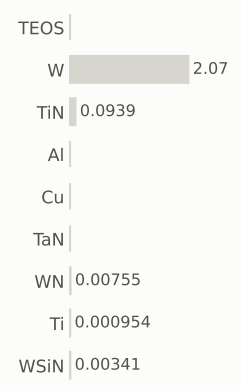

gases emitted (g)

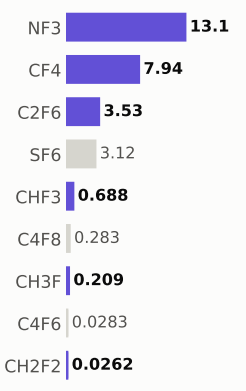

Step #12190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,295.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

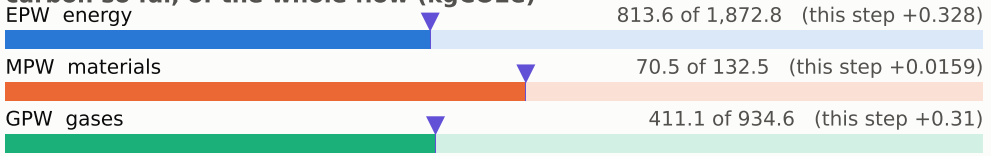

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

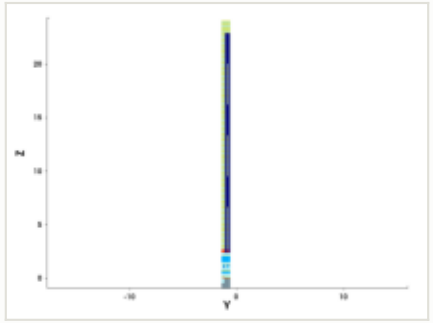

y cut at -1.035 µm

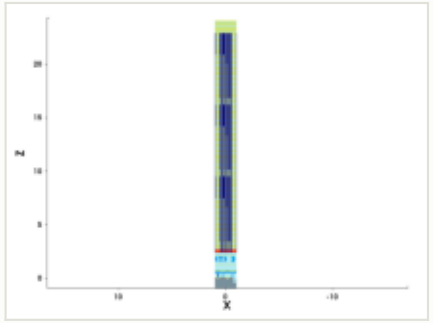

mask for this step

no mask for this step

steps by process area

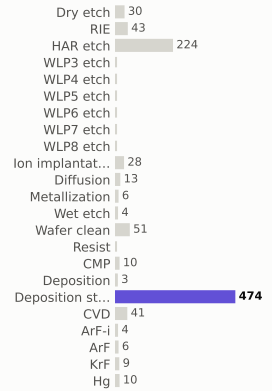

materials deposited (g)

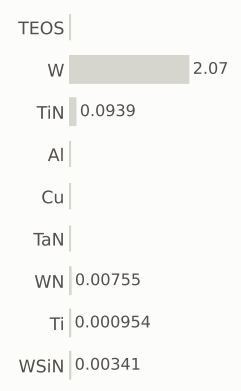

gases emitted (g)

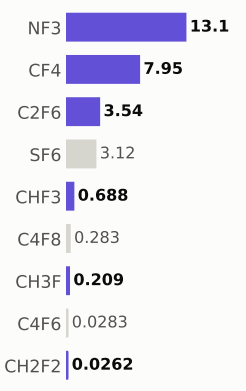

Step #12200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,295.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

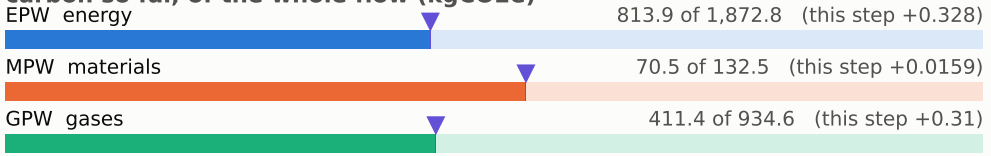

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

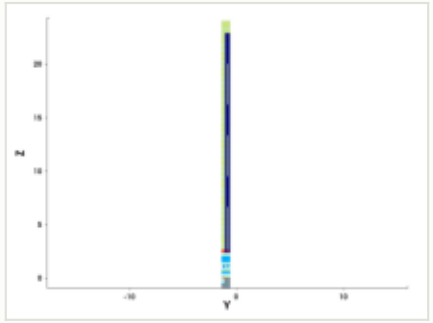

y cut at -1.035 µm

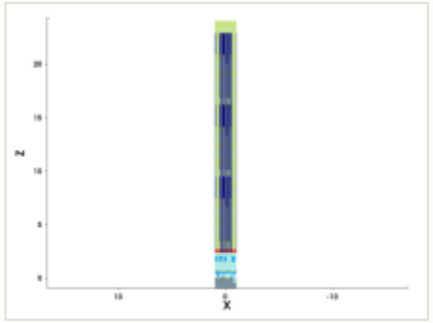

mask for this step

no mask for this step

steps by process area

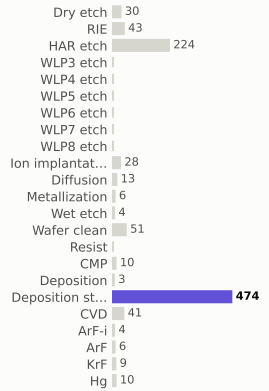

materials deposited (g)

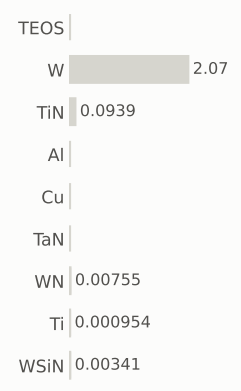

gases emitted (g)



Step #12210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,296.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

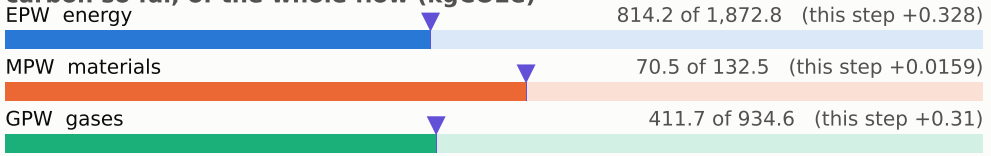

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

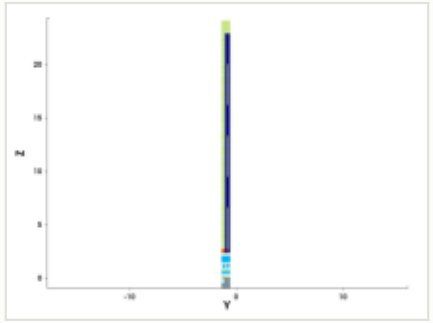

y cut at -1.035 µm

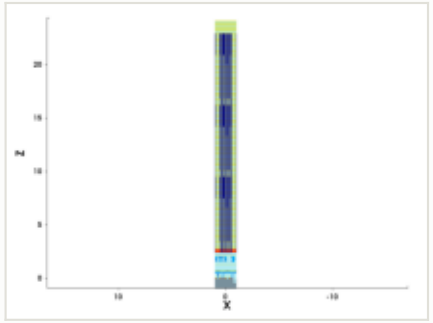

mask for this step

no mask for this step

steps by process area

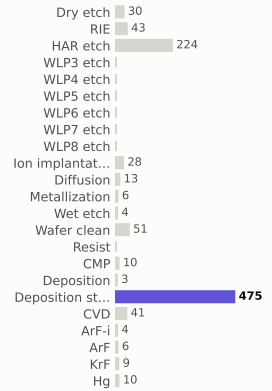

materials deposited (g)

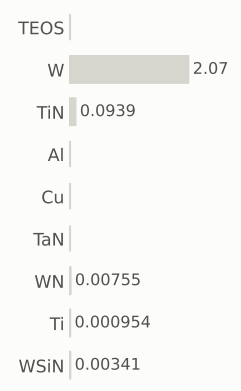

gases emitted (g)

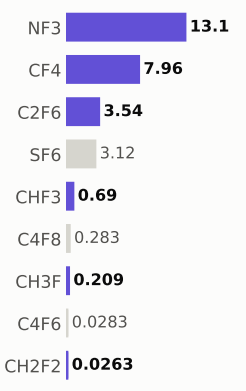

Step #12220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,297.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

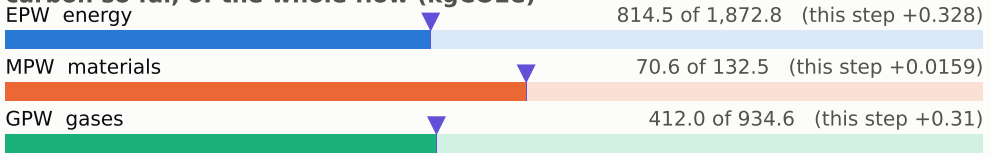

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

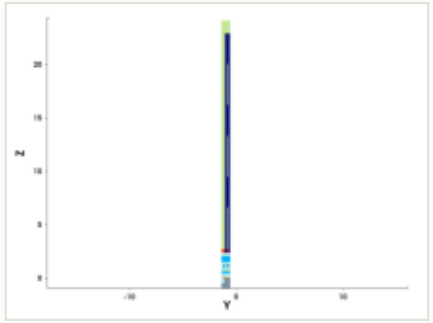

y cut at -1.035 µm

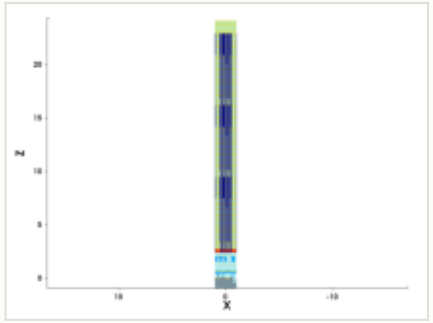

mask for this step

no mask for this step

steps by process area

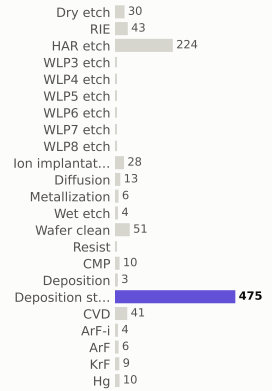

materials deposited (g)

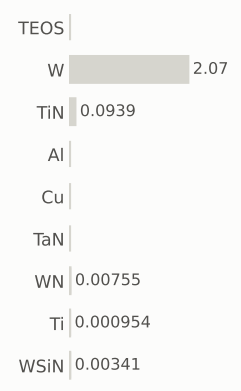

gases emitted (g)

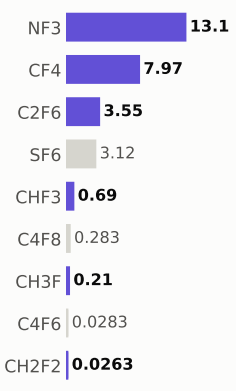

Step #12230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,297.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

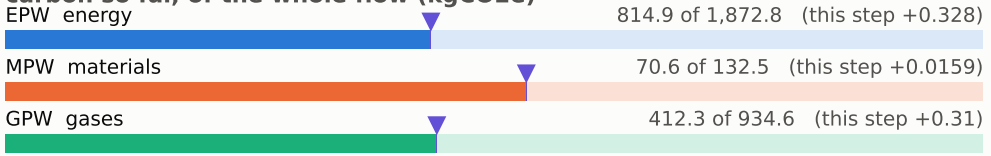

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

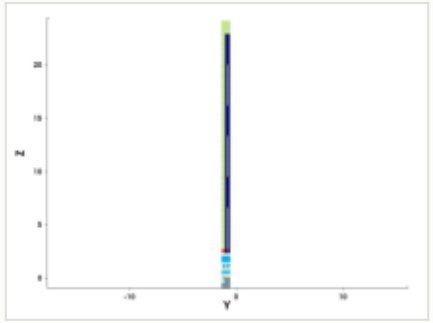

y cut at -1.035 µm

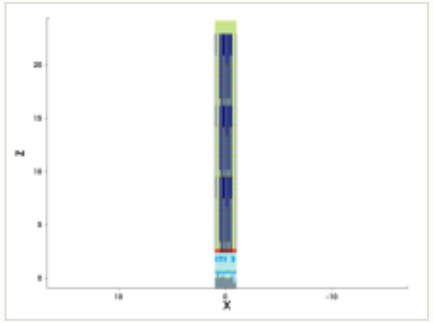

mask for this step

no mask for this step

steps by process area

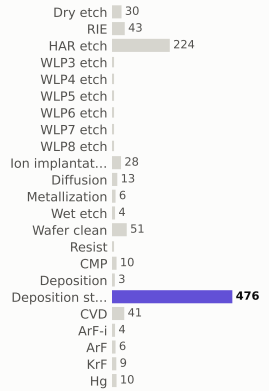

materials deposited (g)

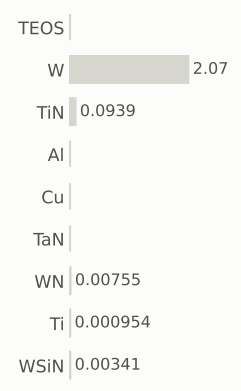

gases emitted (g)

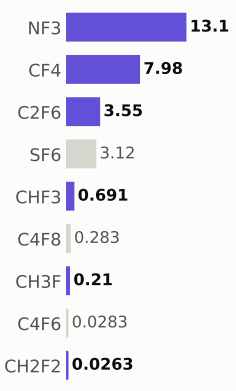

Step #12240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,298.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

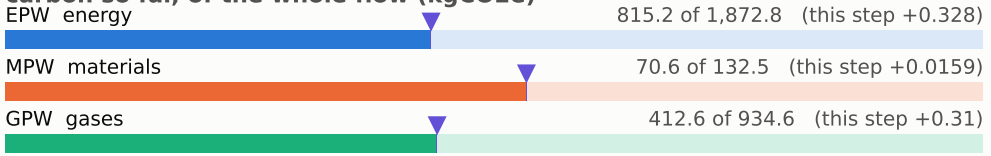

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

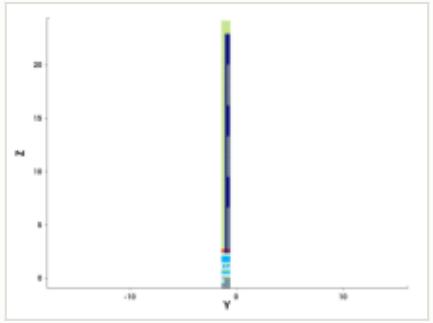

y cut at -1.035 µm

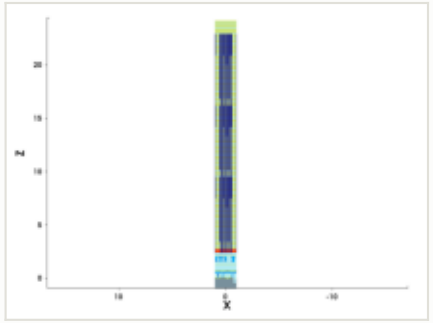

mask for this step

no mask for this step

steps by process area

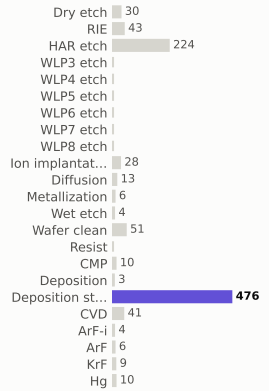

materials deposited (g)

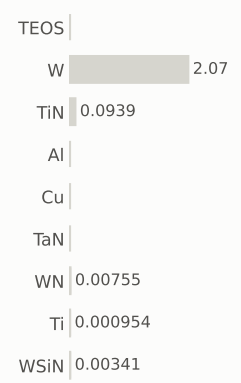

gases emitted (g)

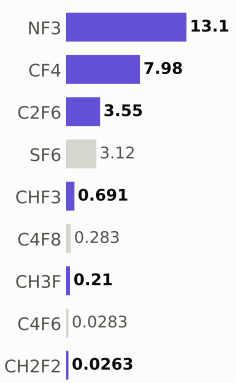

Step #12250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,299.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

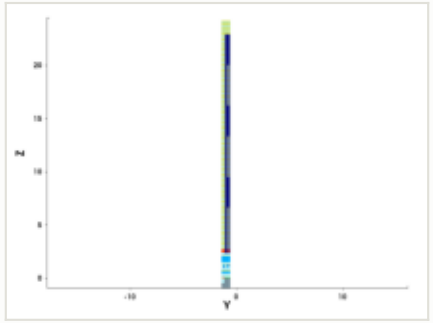

y cut at -1.035 µm

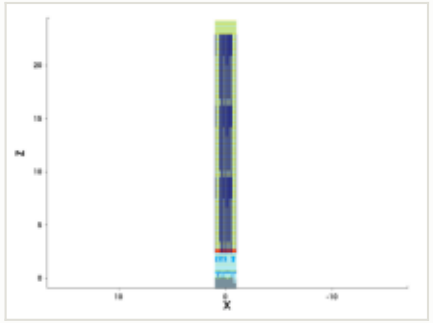

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

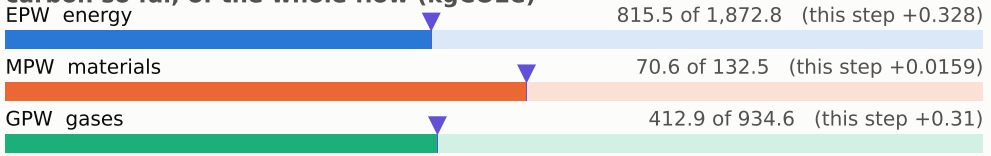

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

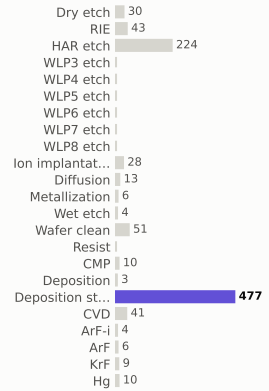

materials deposited (g)

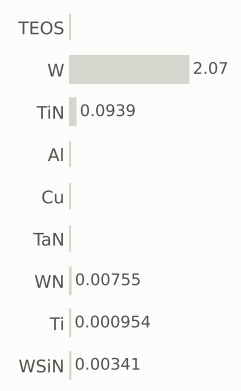

gases emitted (g)

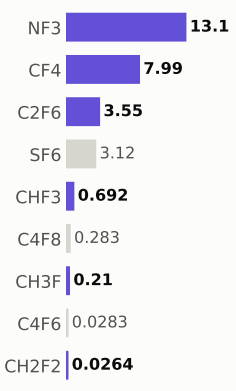

Step #12260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,299.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

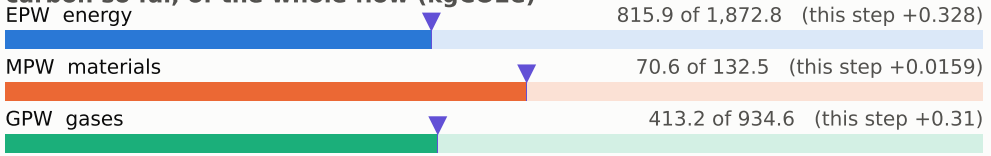

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

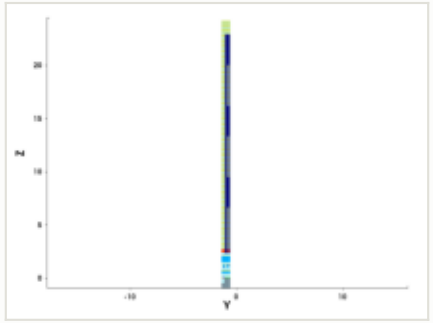

y cut at -1.035 µm

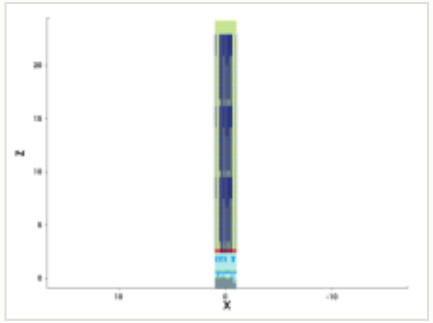

mask for this step

no mask for this step

steps by process area

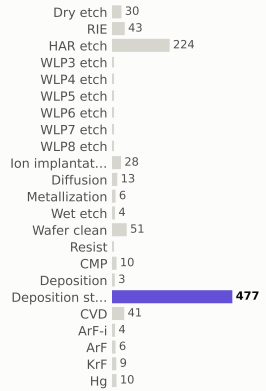

materials deposited (g)

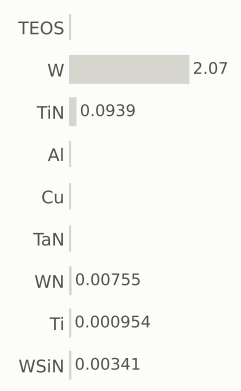

gases emitted (g)

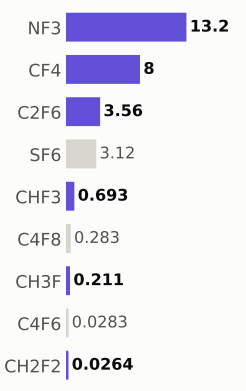

Step #12270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,300.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

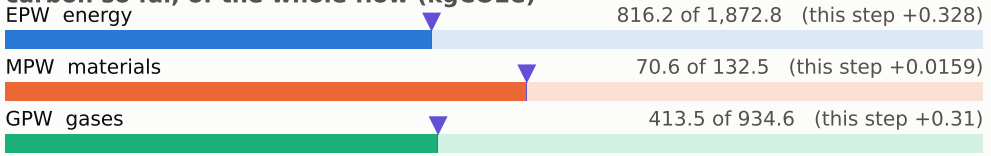

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

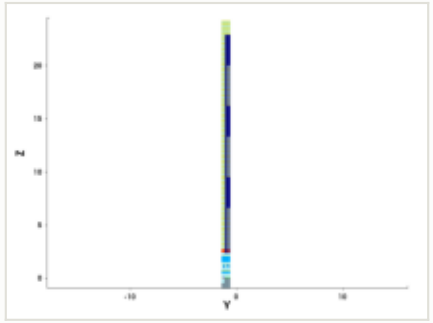

y cut at -1.035 µm

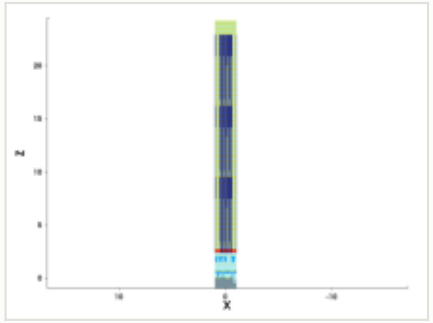

mask for this step

no mask for this step

steps by process area

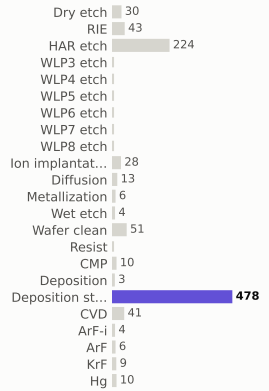

materials deposited (g)

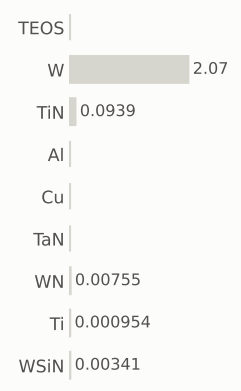

gases emitted (g)



Step #12280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,301.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

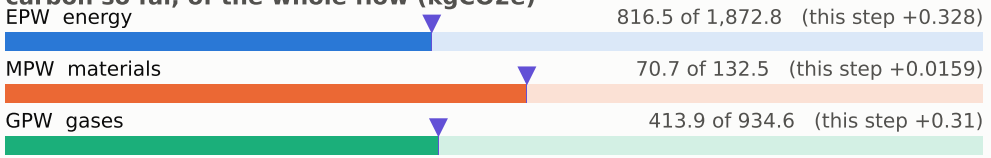

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

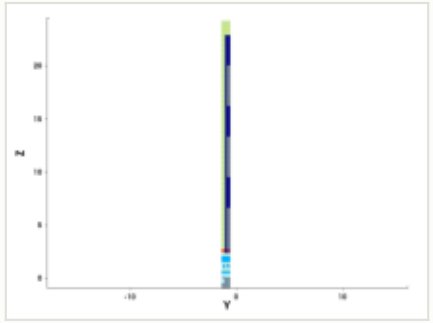

y cut at -1.035 µm

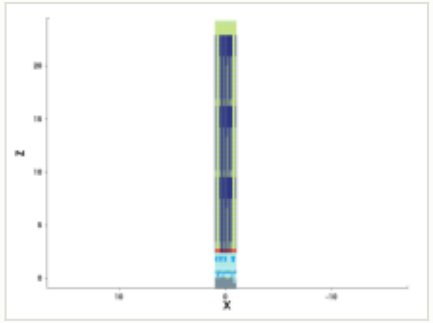

mask for this step

no mask for this step

steps by process area

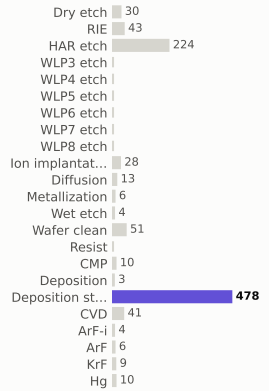

materials deposited (g)

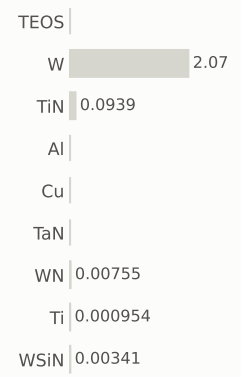

gases emitted (g)

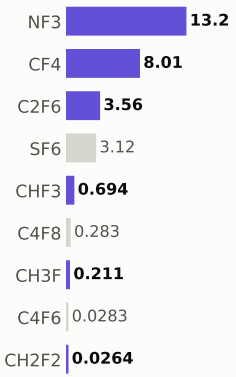

Step #12290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,301.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

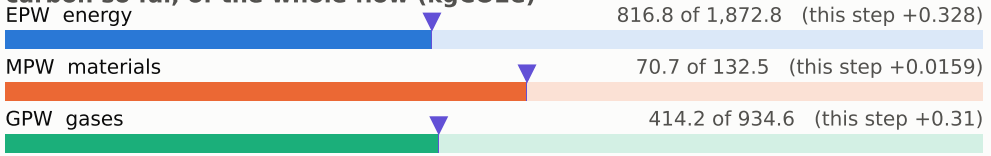

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

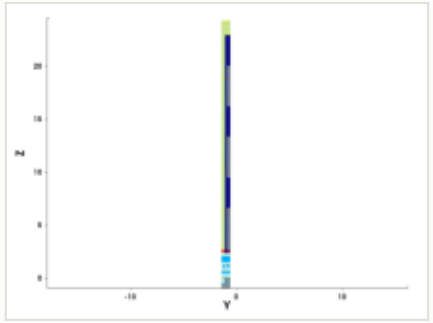

y cut at -1.035 µm

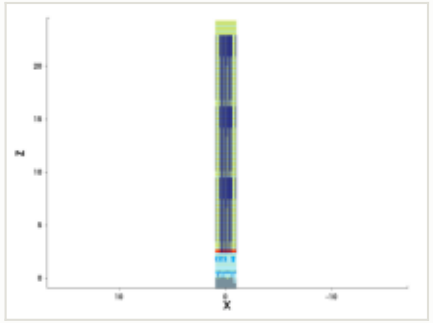

mask for this step

no mask for this step

steps by process area

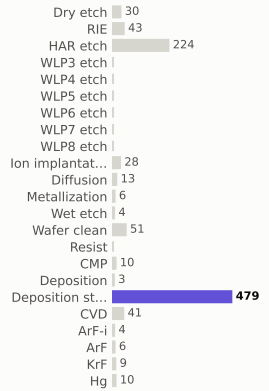

materials deposited (g)

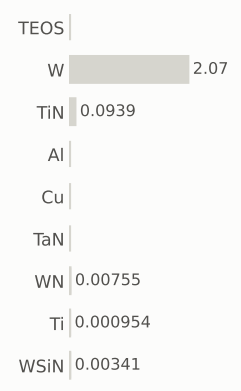

gases emitted (g)

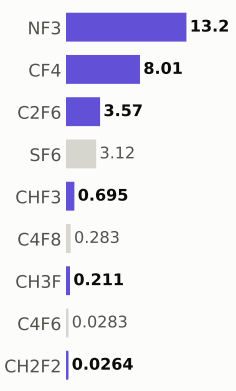

Step #12300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,302.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

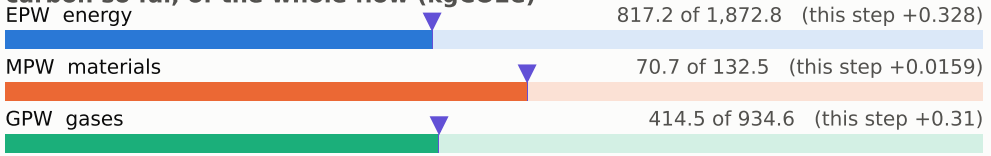

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

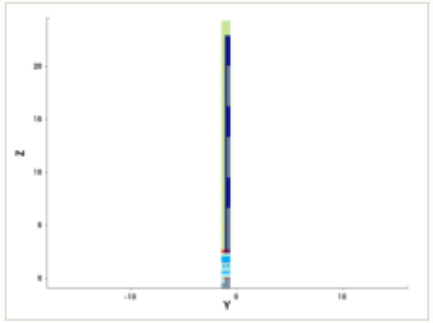

y cut at -1.035 µm

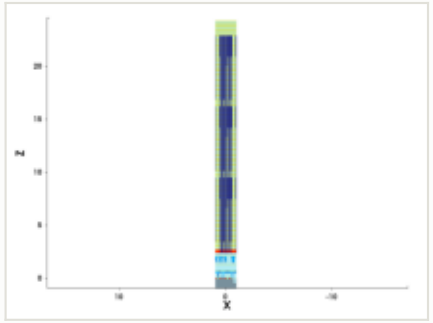

mask for this step

no mask for this step

steps by process area

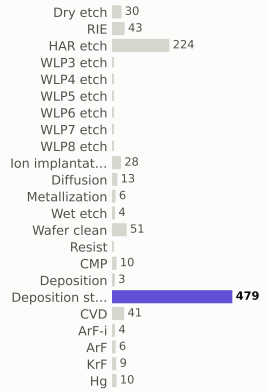

materials deposited (g)

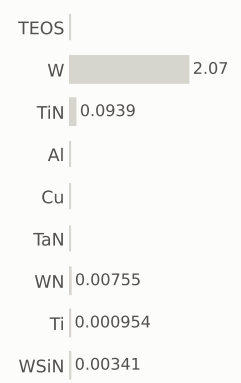

gases emitted (g)

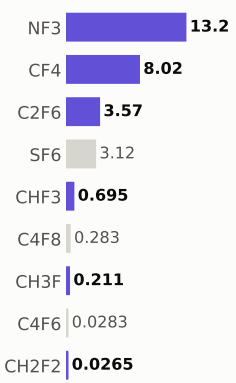

Step #12310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,303.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

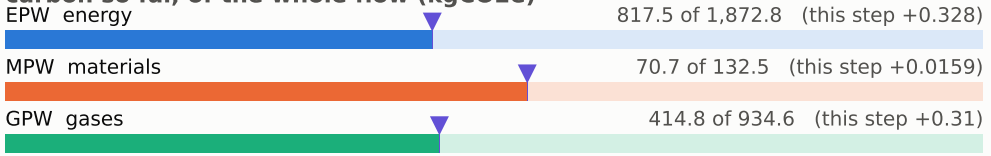

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

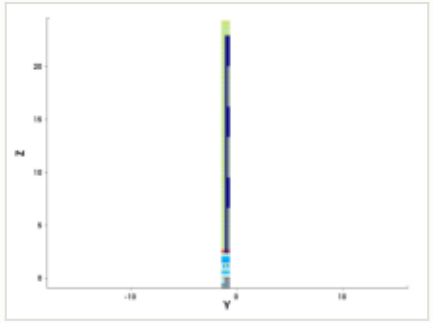

y cut at -1.035 µm

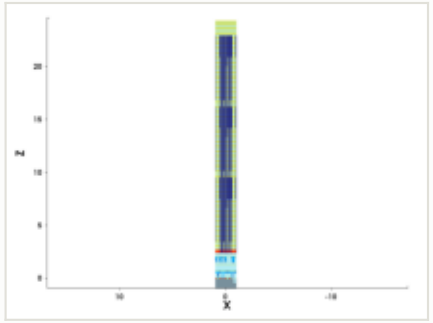

mask for this step

no mask for this step

steps by process area

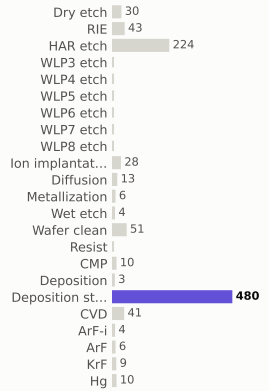

materials deposited (g)

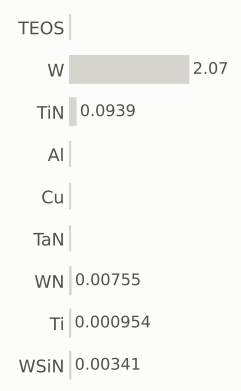

gases emitted (g)

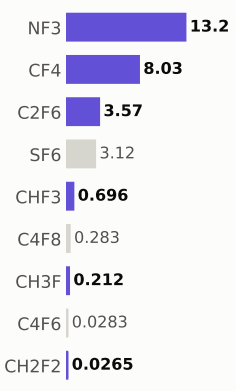

Step #12320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,303.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

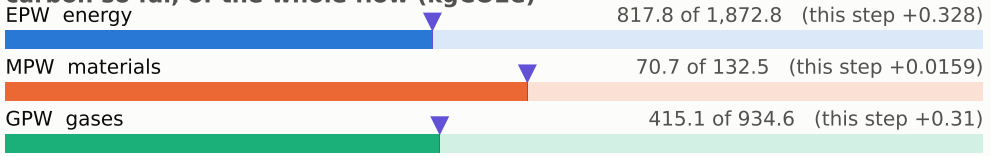

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

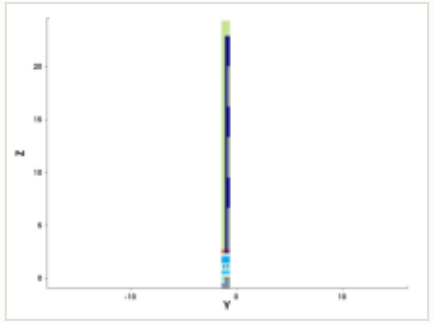

y cut at -1.035 µm

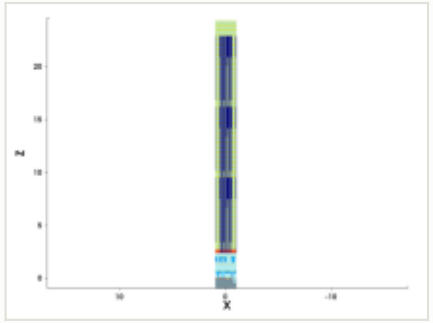

mask for this step

no mask for this step

steps by process area

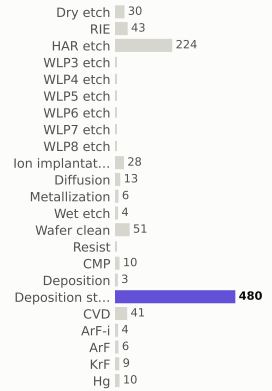

materials deposited (g)

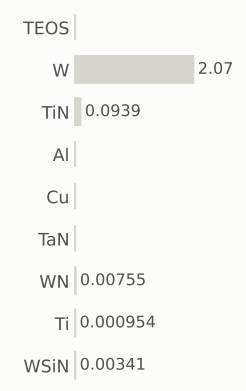

gases emitted (g)

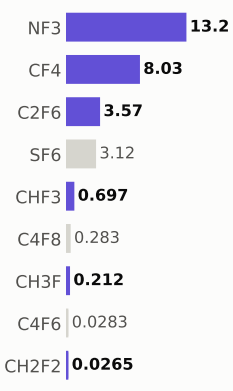

Step #12330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,304.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

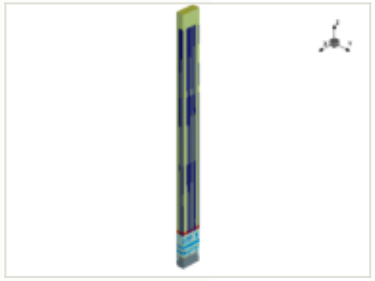

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

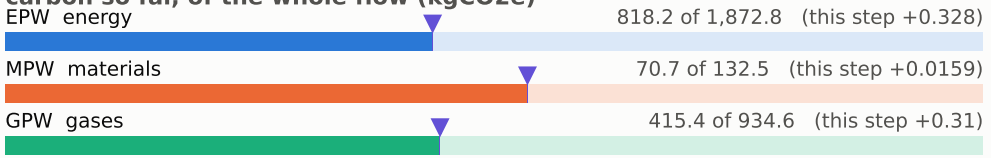

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

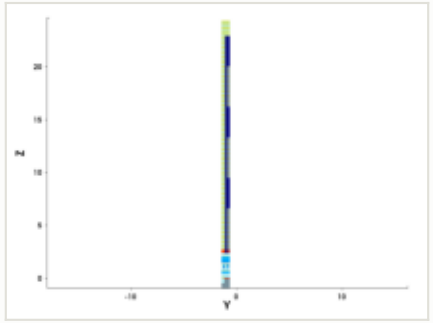

y cut at -1.035 µm

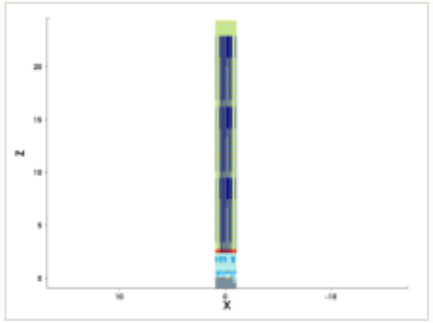

mask for this step

no mask for this step

steps by process area

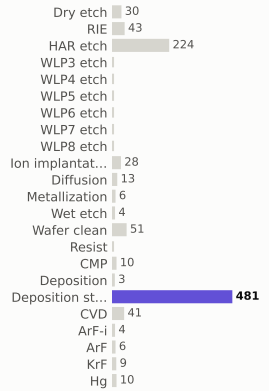

materials deposited (g)

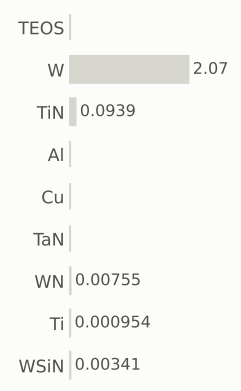

gases emitted (g)

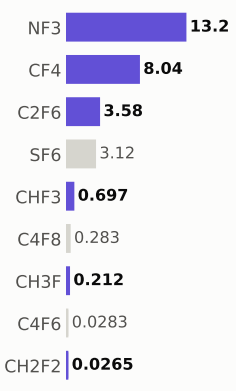

Step #12340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,305.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

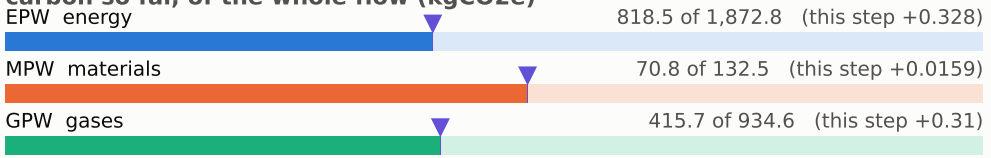

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

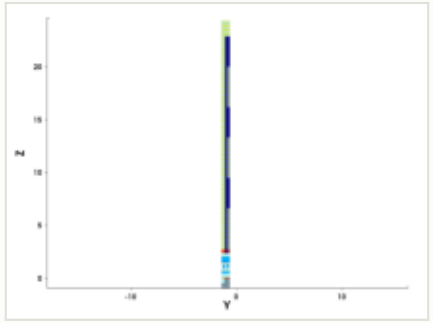

y cut at -1.035 µm

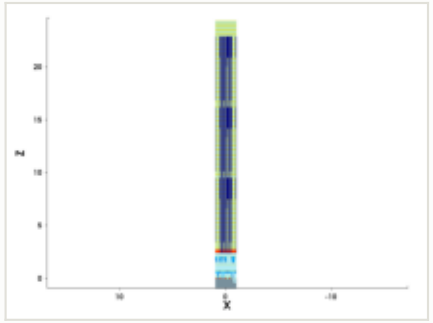

mask for this step

no mask for this step

steps by process area

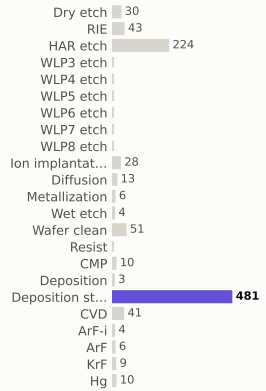

materials deposited (g)

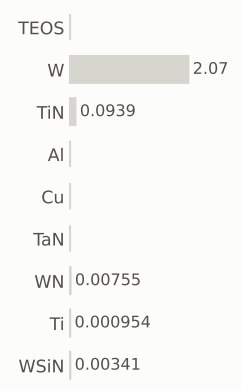

gases emitted (g)

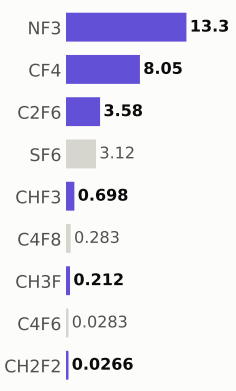

Step #12350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,305.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

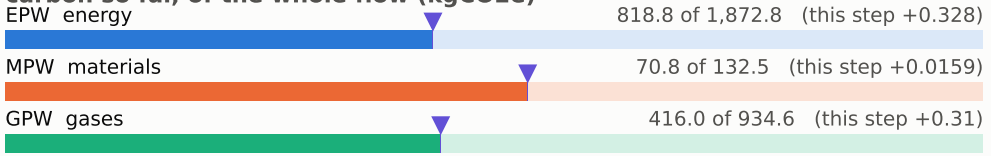

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

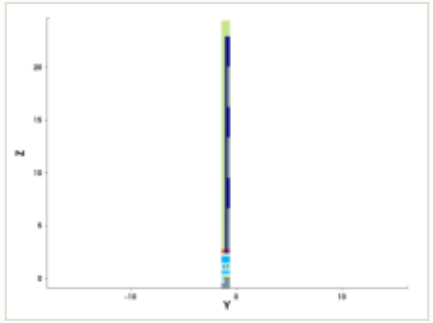

y cut at -1.035 µm

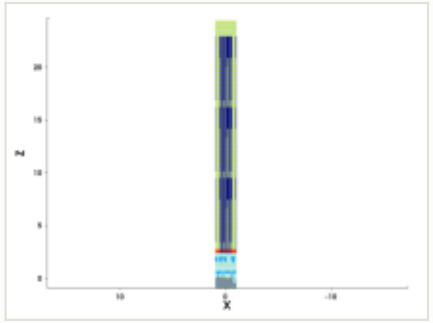

mask for this step

no mask for this step

steps by process area

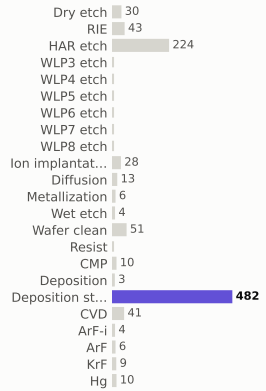

materials deposited (g)

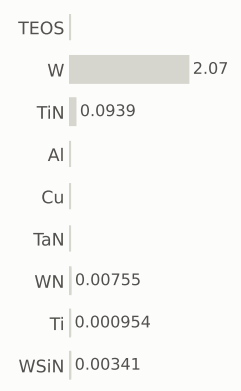

gases emitted (g)

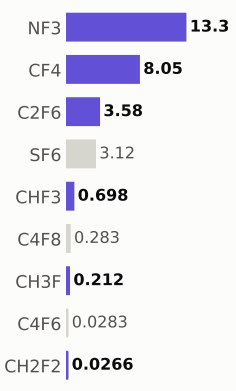

Step #12360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,306.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

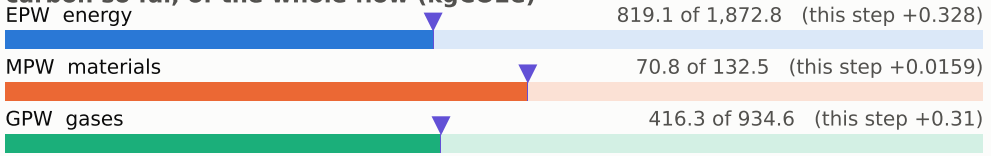

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

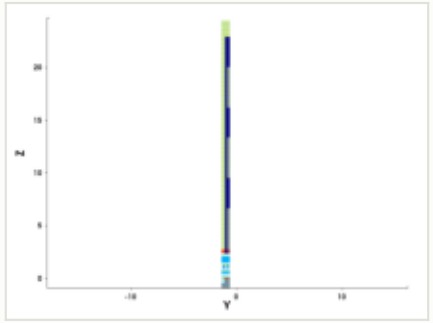

y cut at -1.035 µm

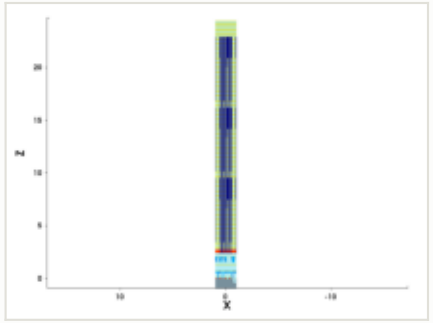

mask for this step

no mask for this step

steps by process area

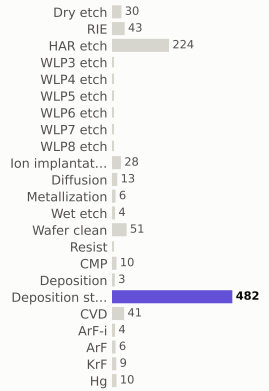

materials deposited (g)

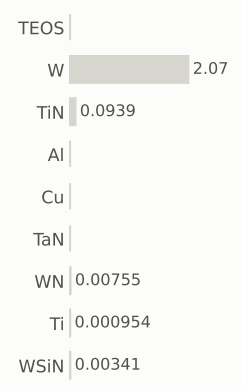

gases emitted (g)

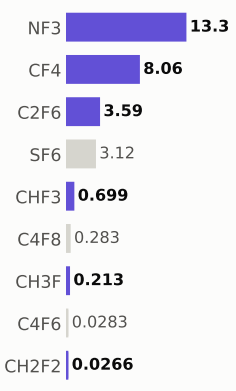

Step #12370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,306.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

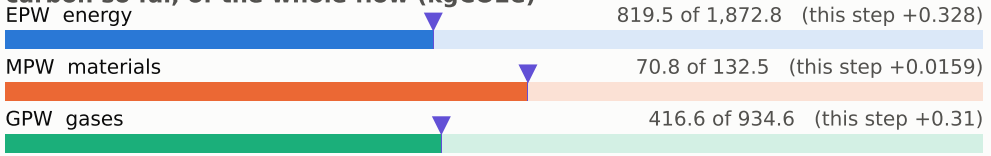

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

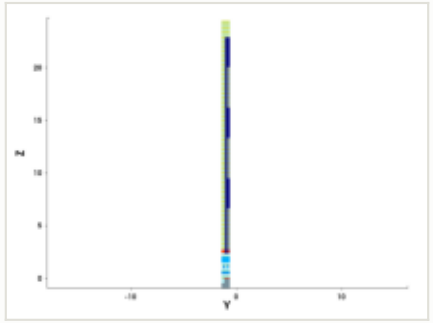

y cut at -1.035 µm

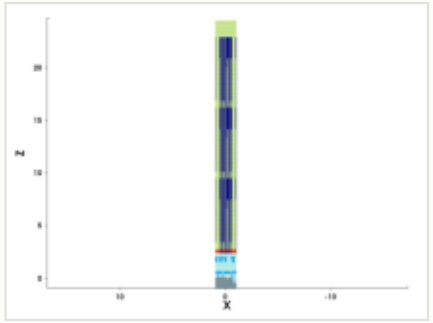

mask for this step

no mask for this step

steps by process area

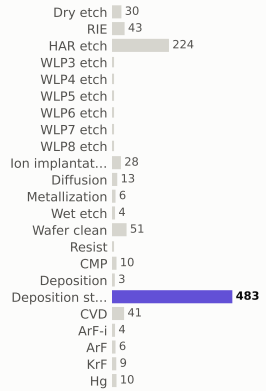

materials deposited (g)

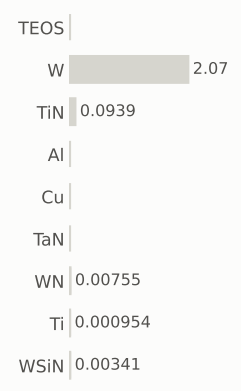

gases emitted (g)

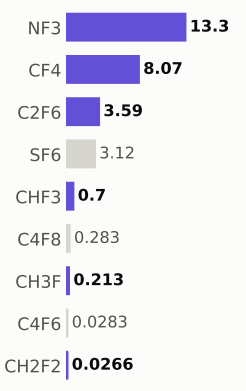

Step #12380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,307.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

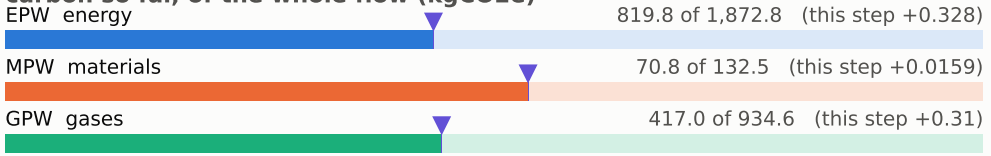

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

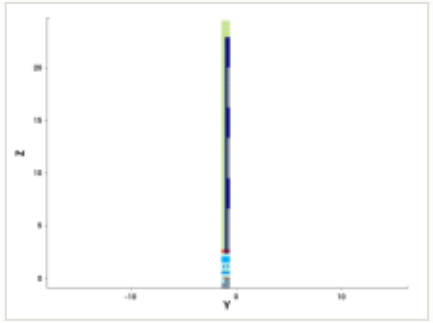

y cut at -1.035 µm

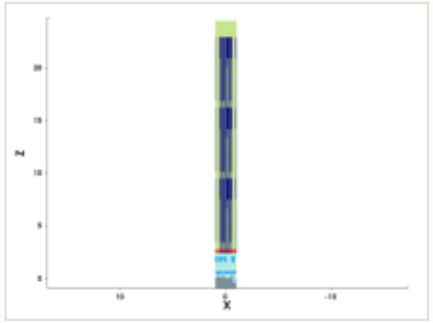

mask for this step

no mask for this step

steps by process area

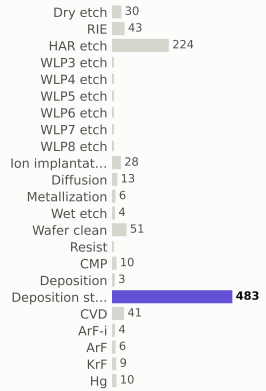

materials deposited (g)

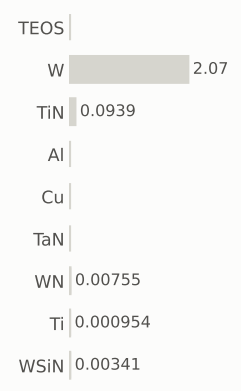

gases emitted (g)

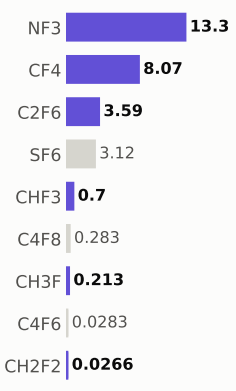

Step #12390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,308.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

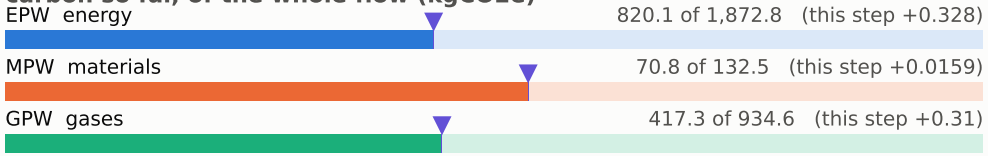

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

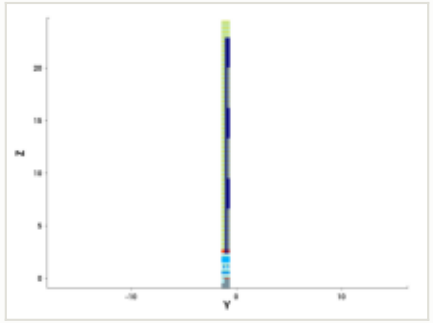

y cut at -1.035 µm

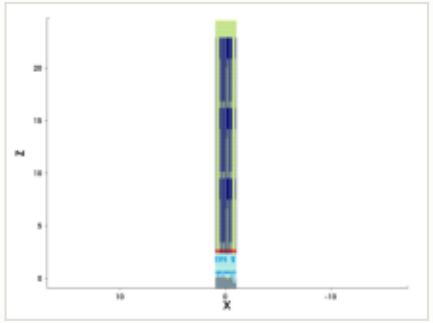

mask for this step

no mask for this step

steps by process area

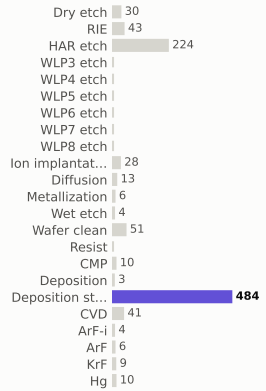

materials deposited (g)

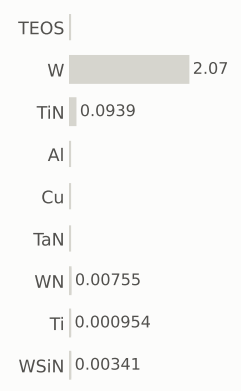

gases emitted (g)



Step #12400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,308.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

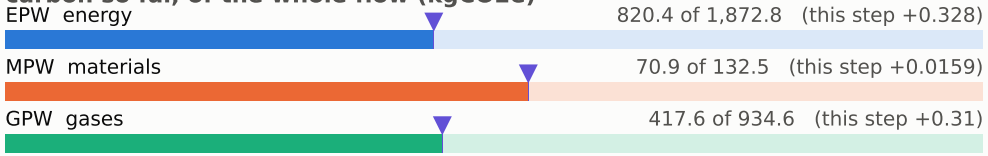

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

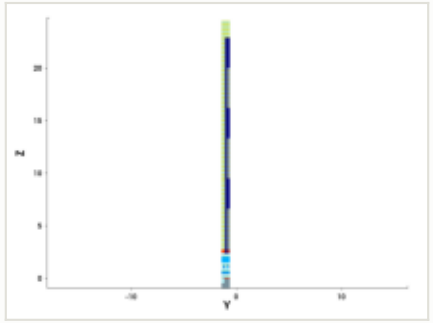

y cut at -1.035 µm

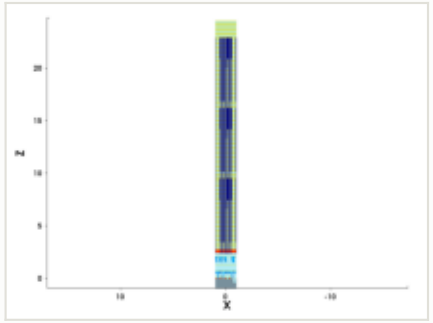

mask for this step

no mask for this step

steps by process area

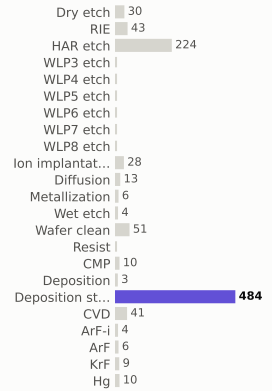

materials deposited (g)

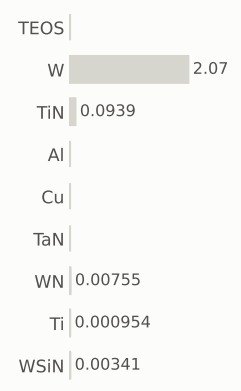

gases emitted (g)

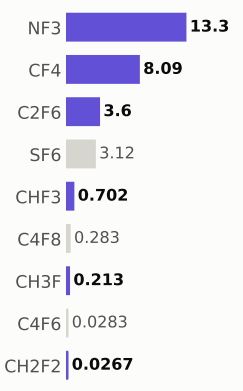

Step #12410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,309.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

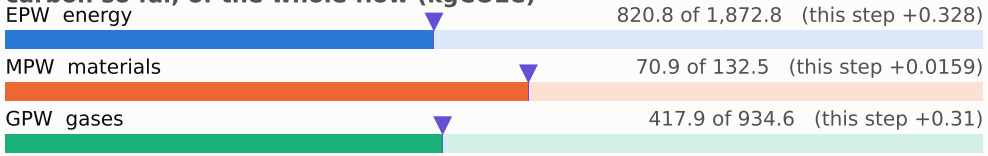

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

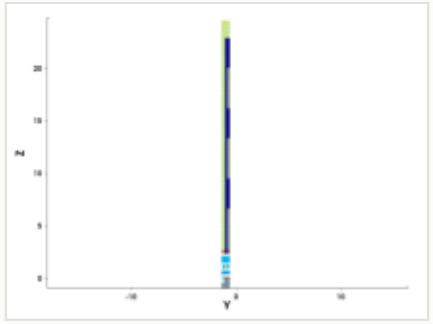

y cut at -1.035 µm

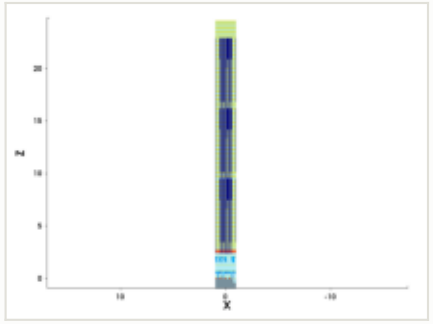

mask for this step

no mask for this step

steps by process area

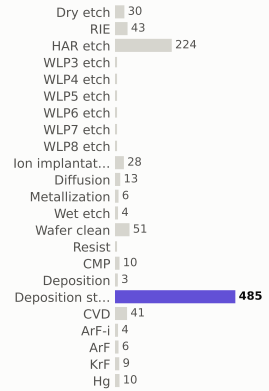

materials deposited (g)

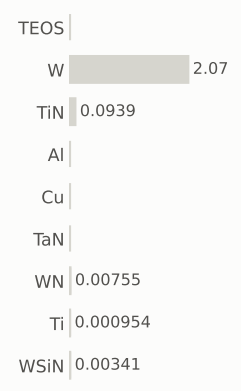

gases emitted (g)

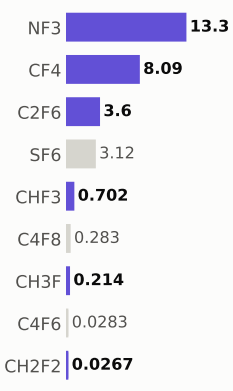

Step #12420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,310.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

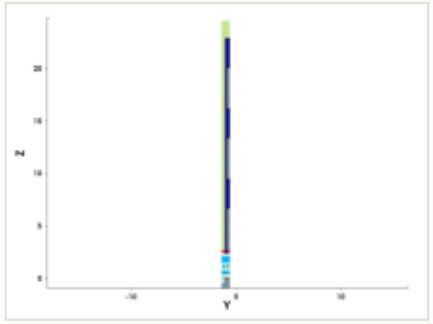

y cut at -1.035 µm

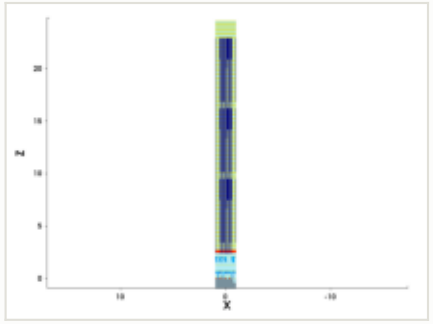

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

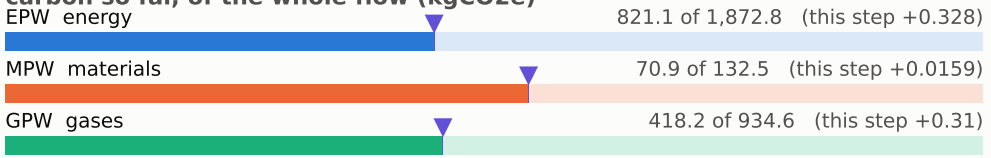

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

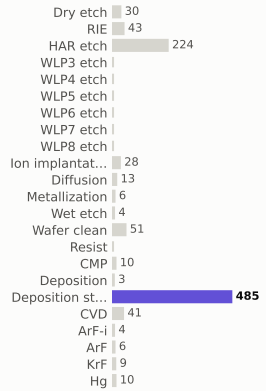

materials deposited (g)

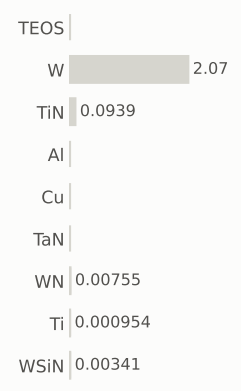

gases emitted (g)

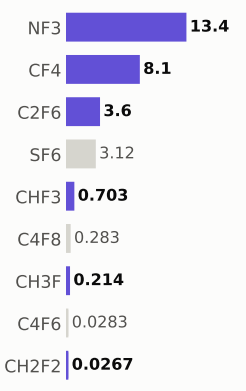

Step #12430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,310.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

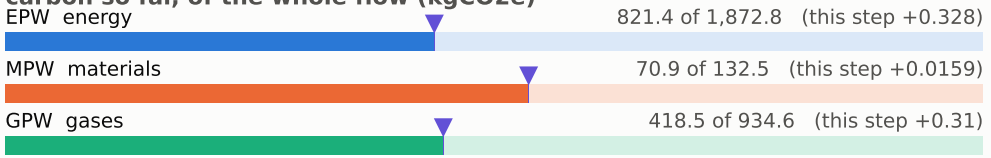

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

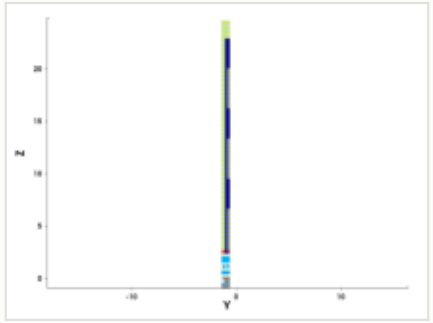

y cut at -1.035 µm

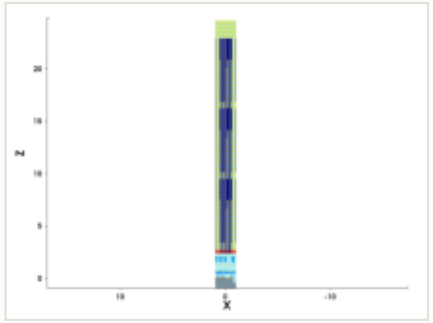

mask for this step

no mask for this step

steps by process area

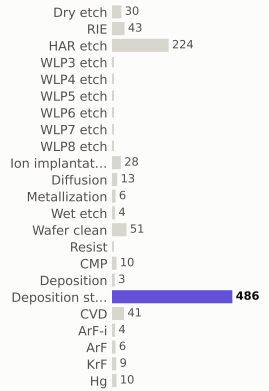

materials deposited (g)

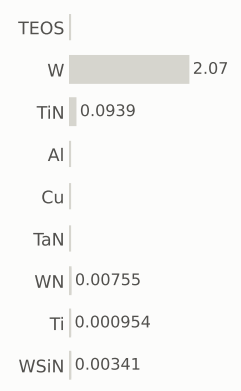

gases emitted (g)

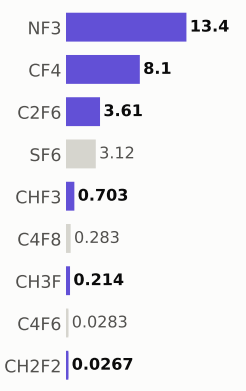

Step #12440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,311.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

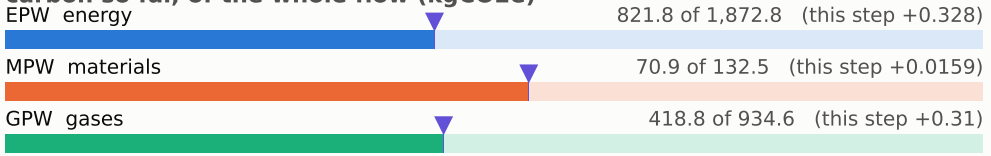

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

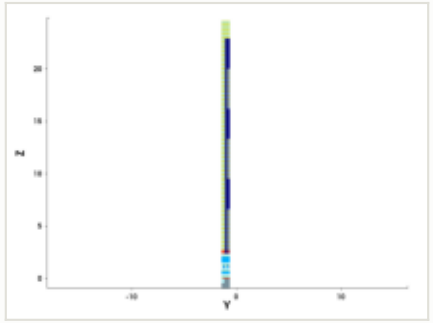

y cut at -1.035 µm

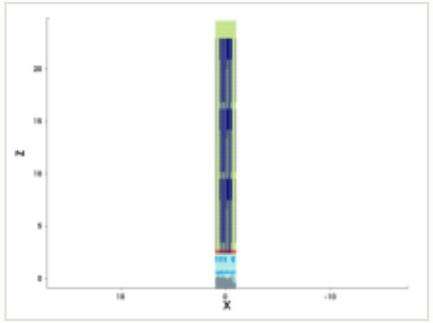

mask for this step

no mask for this step

steps by process area

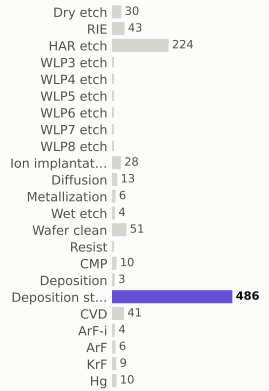

materials deposited (g)

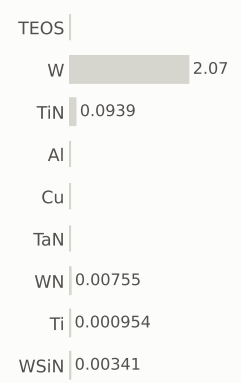

gases emitted (g)

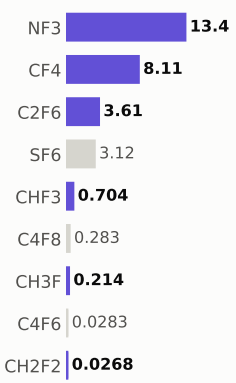

Step #12450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,312.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

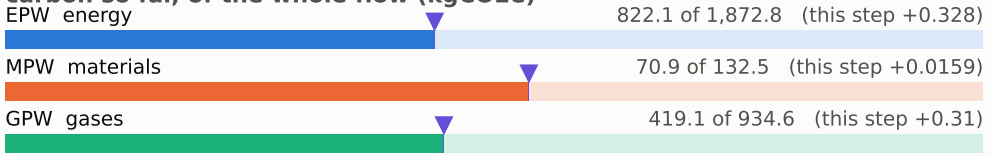

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

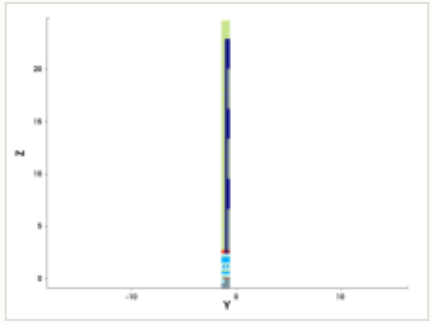

y cut at -1.035 µm

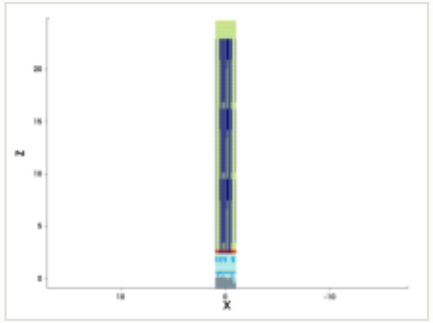

mask for this step

no mask for this step

steps by process area

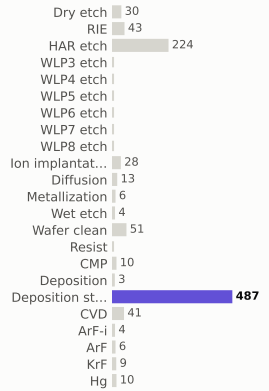

materials deposited (g)

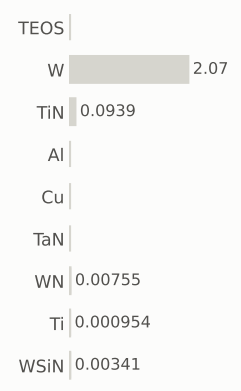

gases emitted (g)

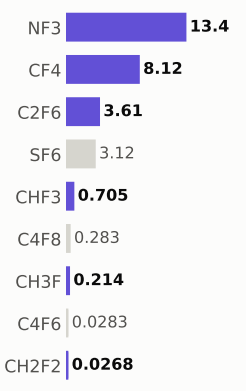

Step #12460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,312.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

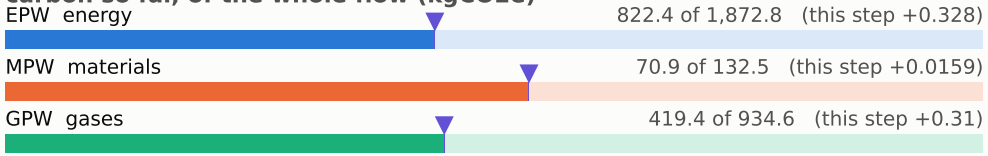

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

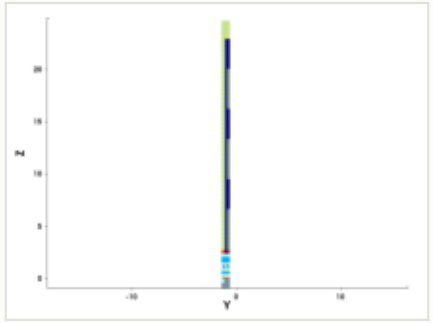

y cut at -1.035 µm

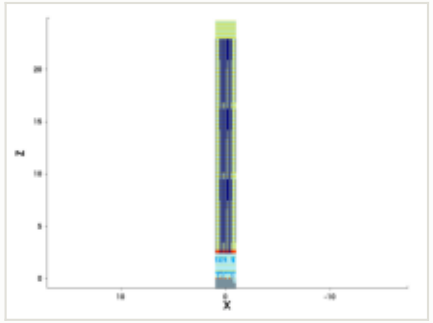

mask for this step

no mask for this step

steps by process area

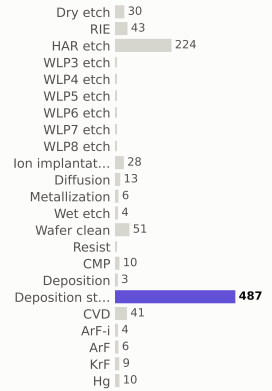

materials deposited (g)

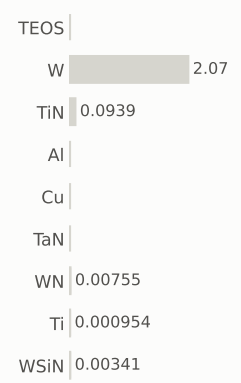

gases emitted (g)

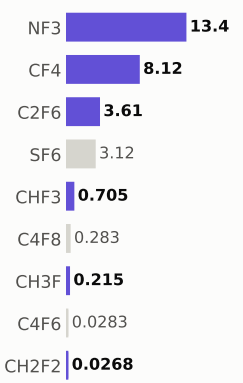

Step #12470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,313.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

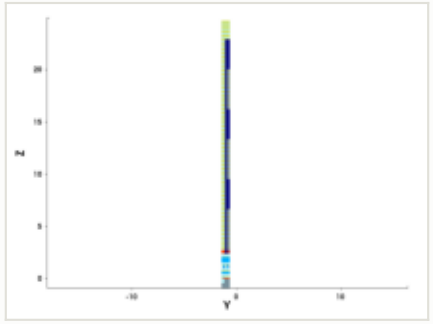

y cut at -1.035 µm

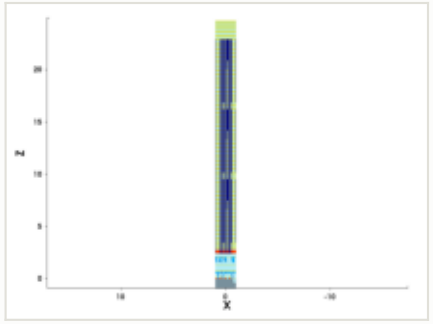

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

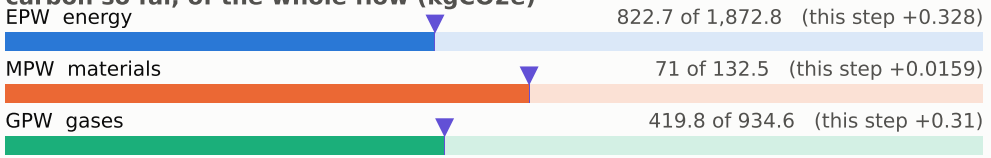

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

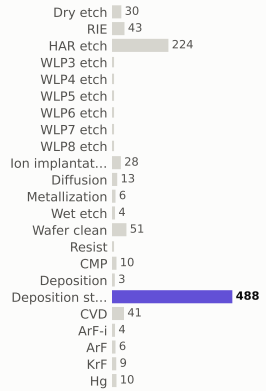

materials deposited (g)

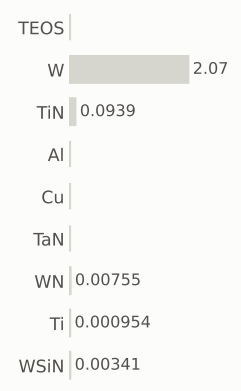

gases emitted (g)

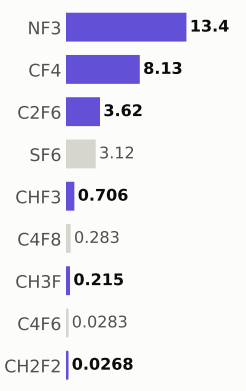

Step #12480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,314.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

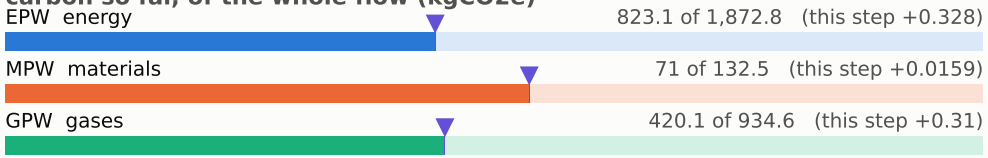

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

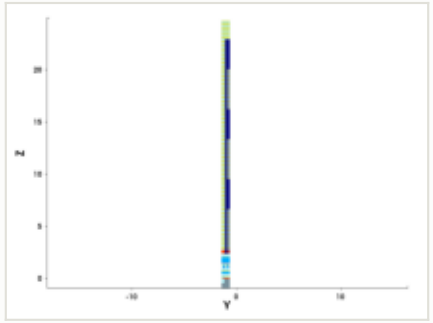

y cut at -1.035 µm

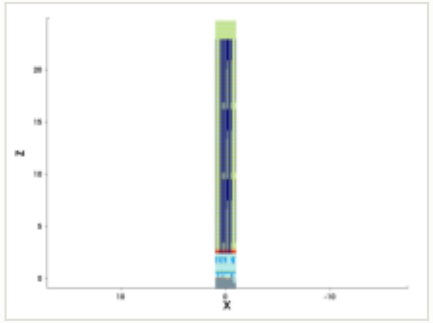

mask for this step

no mask for this step

steps by process area

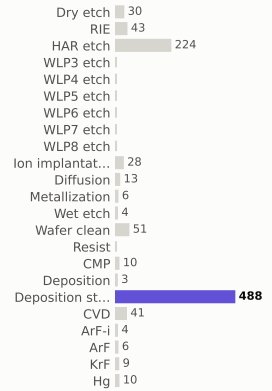

materials deposited (g)

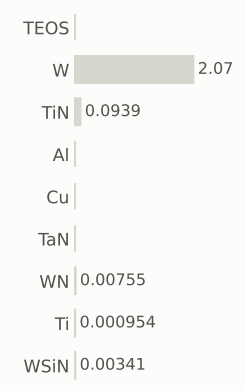

gases emitted (g)

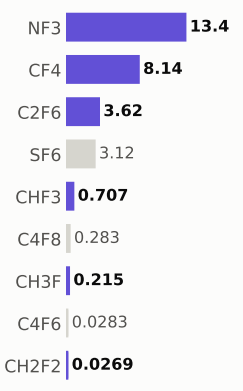

Step #12490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,314.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

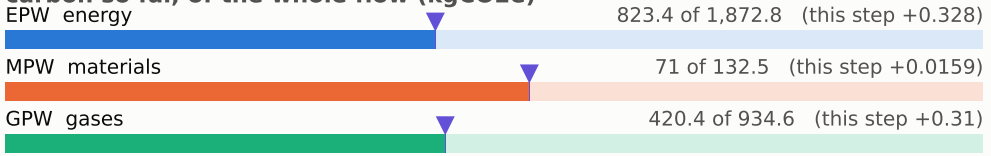

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

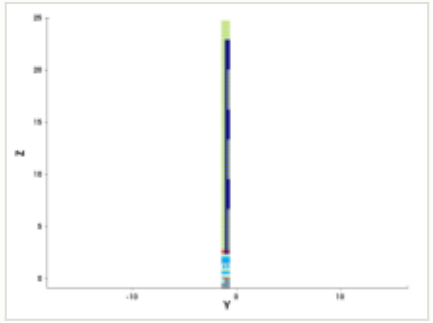

y cut at -1.035 µm

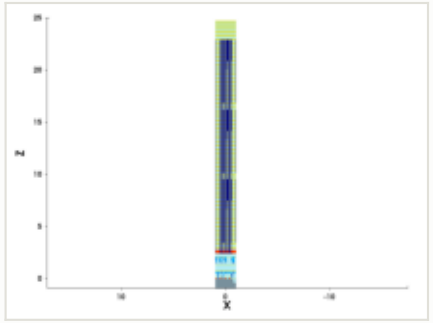

mask for this step

no mask for this step

steps by process area

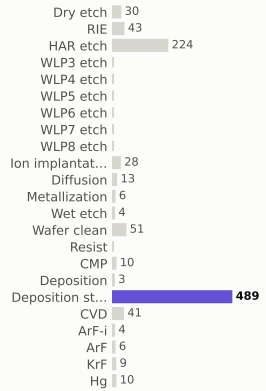

materials deposited (g)

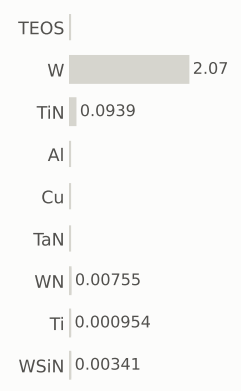

gases emitted (g)

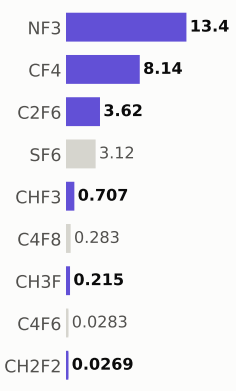

Step #12500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,315.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

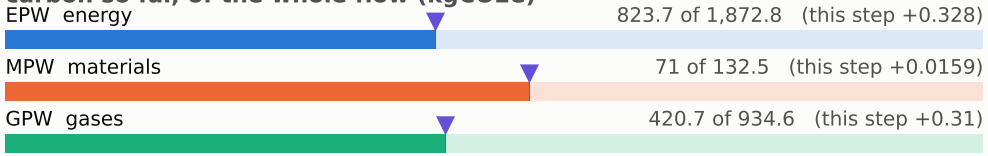

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

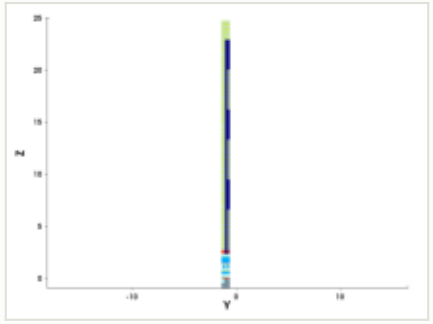

y cut at -1.035 µm

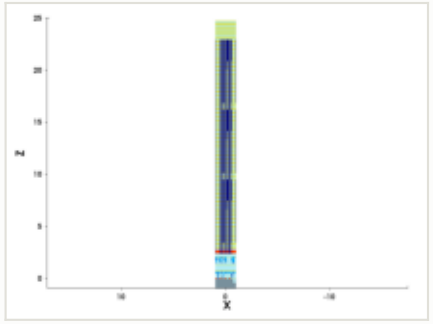

mask for this step

no mask for this step

steps by process area

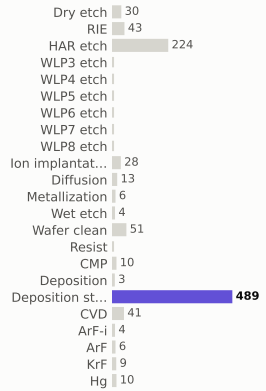

materials deposited (g)

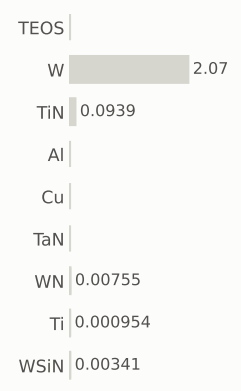

gases emitted (g)

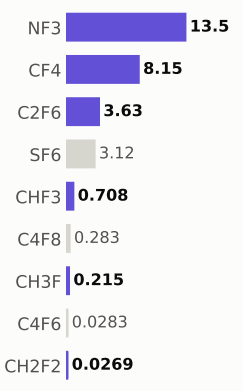

Step #12510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,316.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

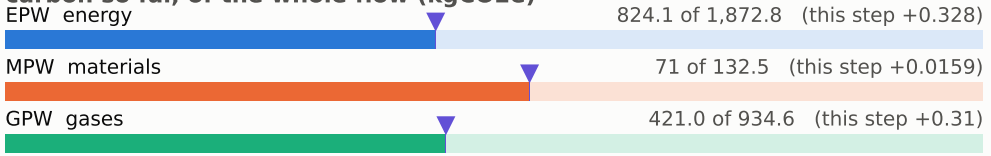

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

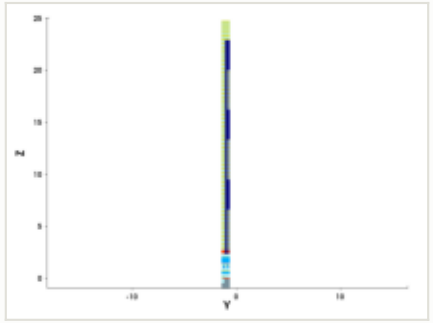

y cut at -1.035 µm

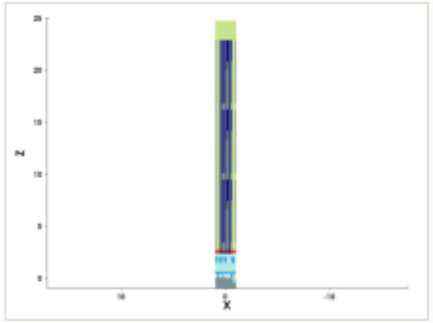

mask for this step

no mask for this step

steps by process area

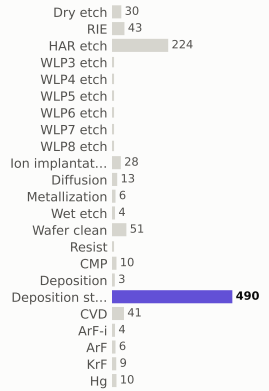

materials deposited (g)

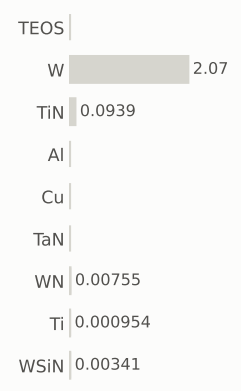

gases emitted (g)

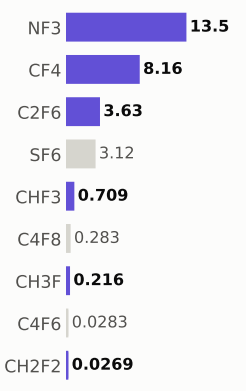

Step #12520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,316.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

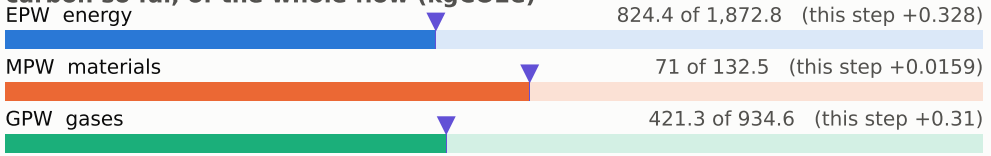

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

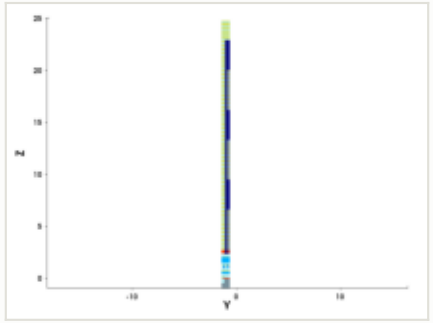

y cut at -1.035 µm

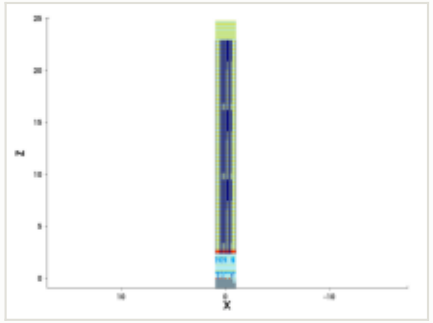

mask for this step

no mask for this step

steps by process area

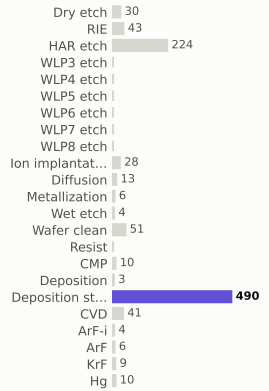

materials deposited (g)

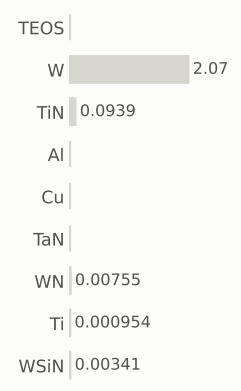

gases emitted (g)

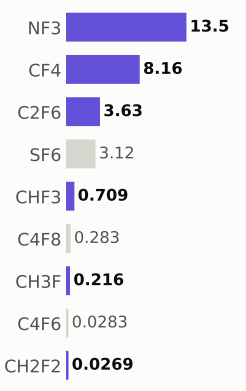

Step #12530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,317.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

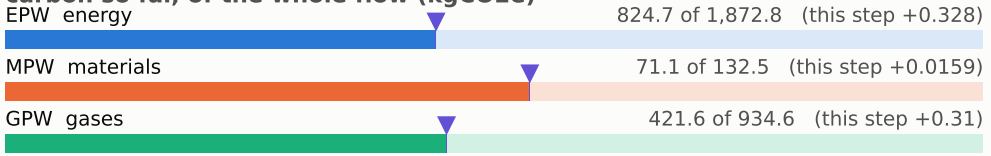

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

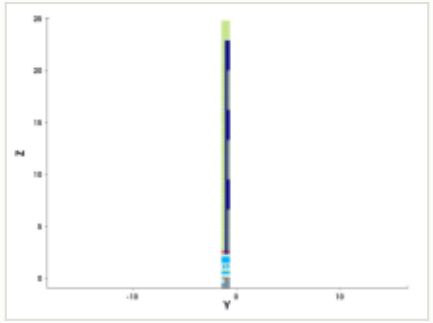

y cut at -1.035 µm

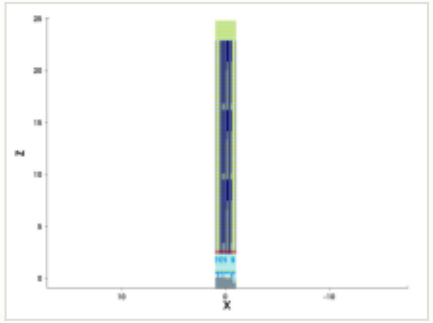

mask for this step

no mask for this step

steps by process area

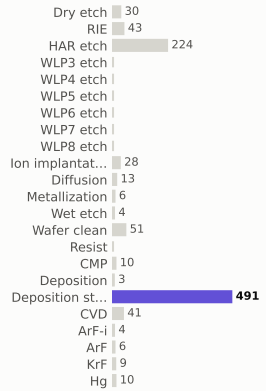

materials deposited (g)

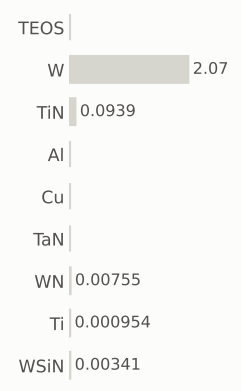

gases emitted (g)



Step #12540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,318.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

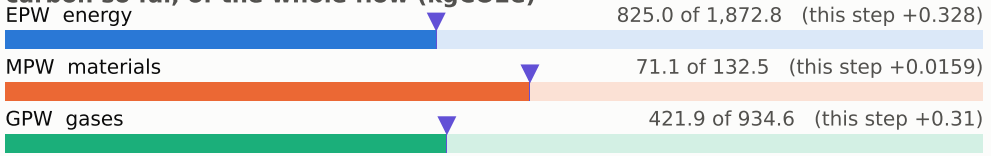

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

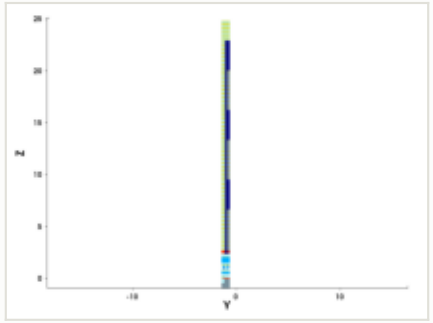

y cut at -1.035 µm

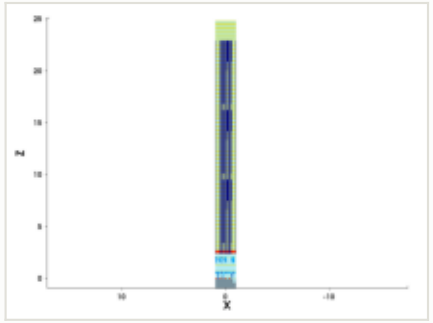

mask for this step

no mask for this step

steps by process area

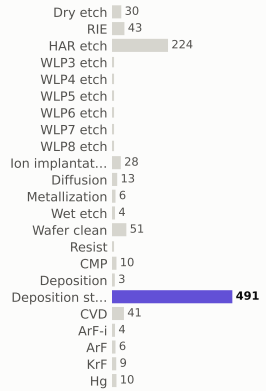

materials deposited (g)

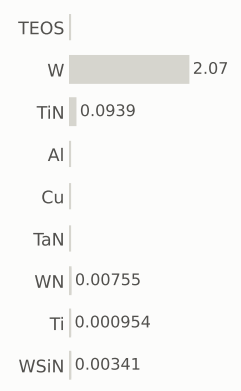

gases emitted (g)



Step #12550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,318.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

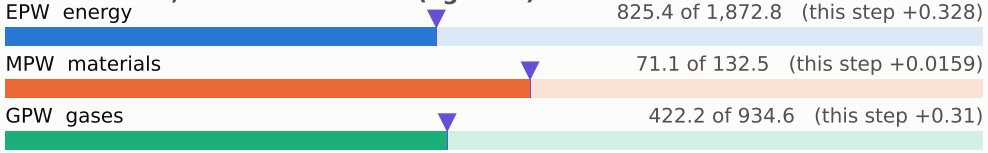

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

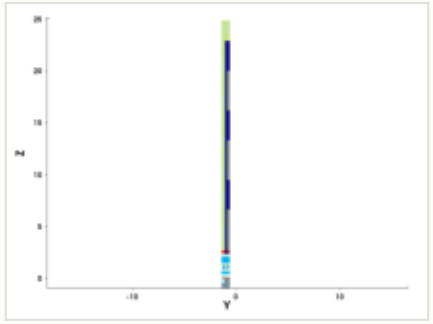

y cut at -1.035 µm

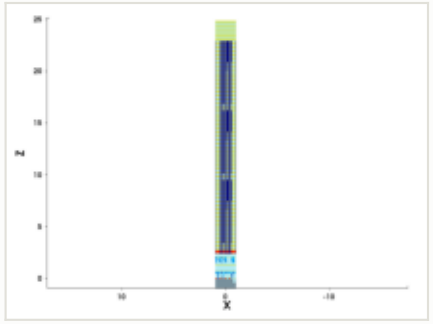

mask for this step

no mask for this step

steps by process area

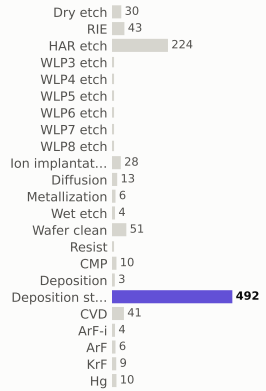

materials deposited (g)

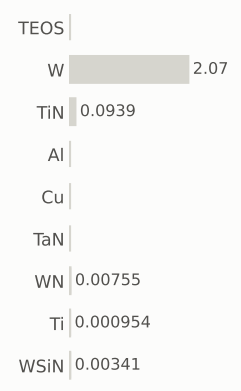

gases emitted (g)

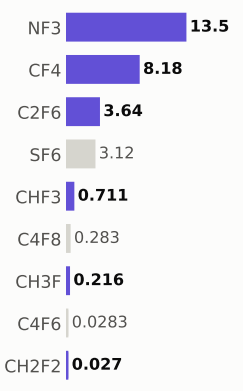

Step #12560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,319.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

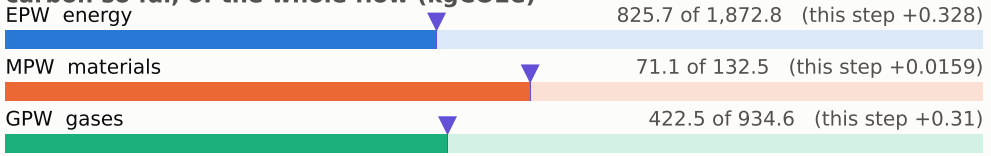

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

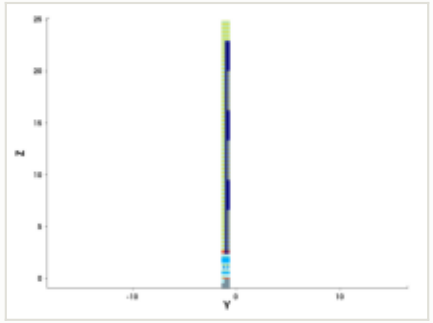

y cut at -1.035 µm

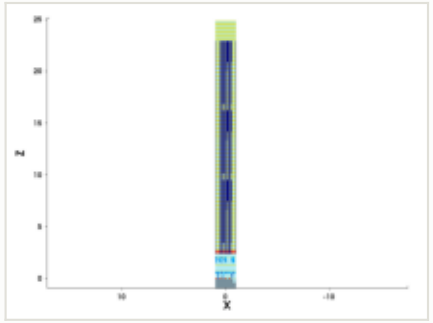

mask for this step

no mask for this step

steps by process area

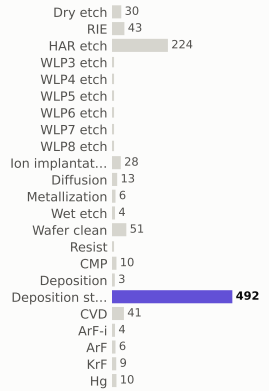

materials deposited (g)

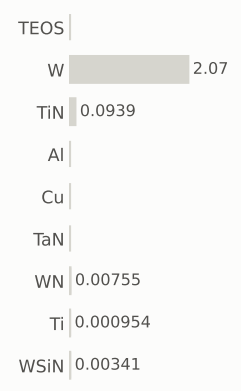

gases emitted (g)

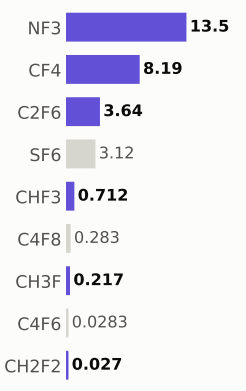

Step #12570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,320.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

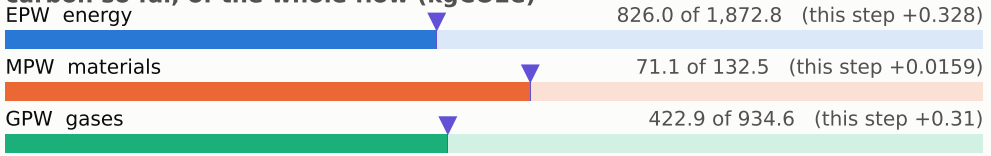

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

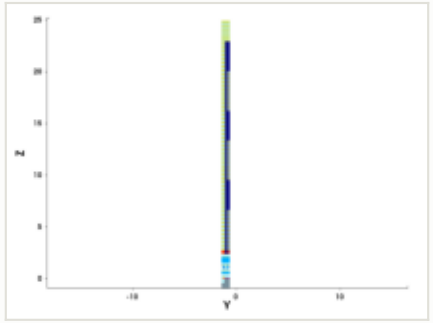

y cut at -1.035 µm

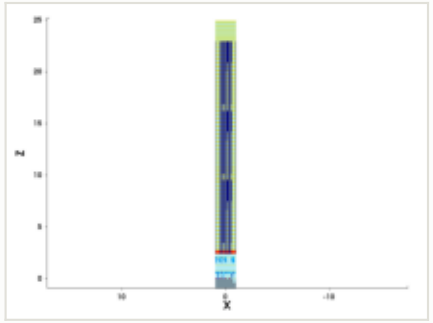

mask for this step

no mask for this step

steps by process area

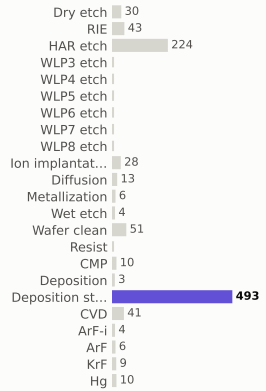

materials deposited (g)

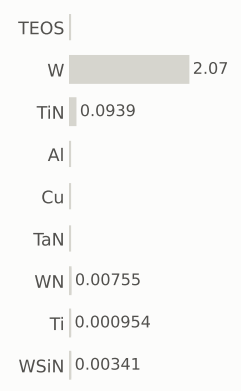

gases emitted (g)



Step #12580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,320.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

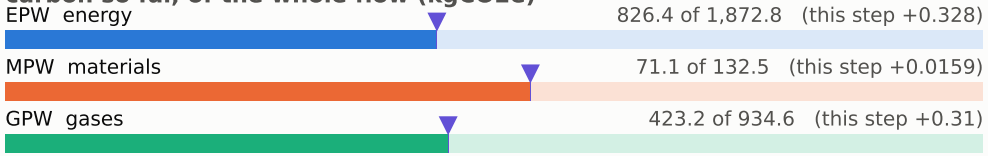

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

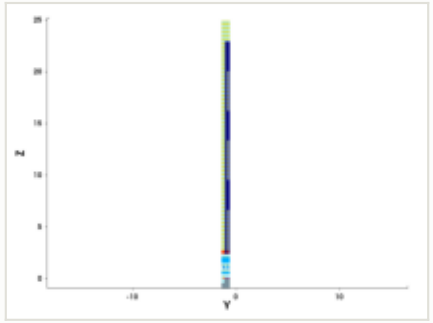

y cut at -1.035 µm

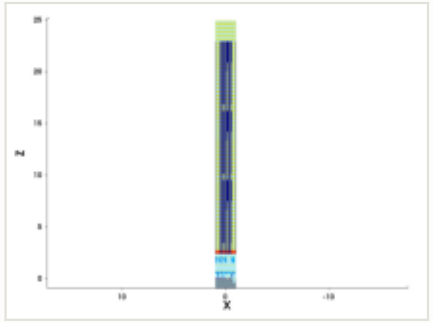

mask for this step

no mask for this step

steps by process area

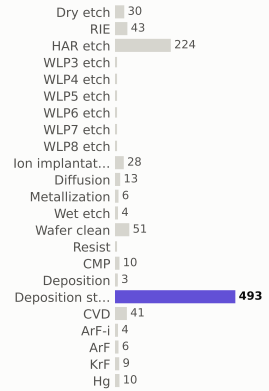

materials deposited (g)

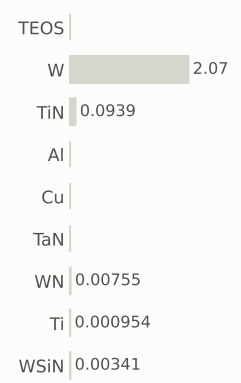

gases emitted (g)

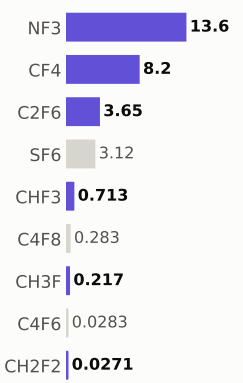

Step #12590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,321.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

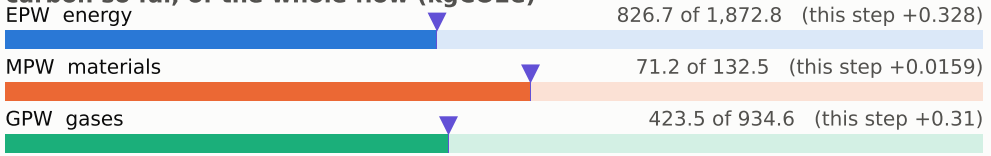

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

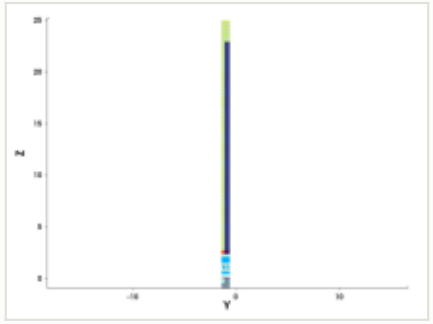

y cut at -1.035 µm

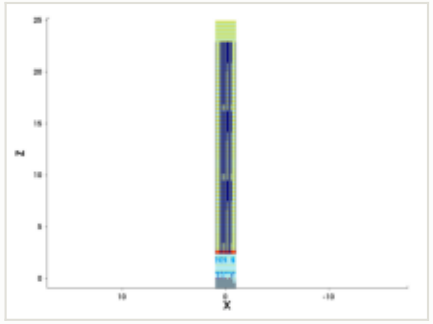

mask for this step

no mask for this step

steps by process area

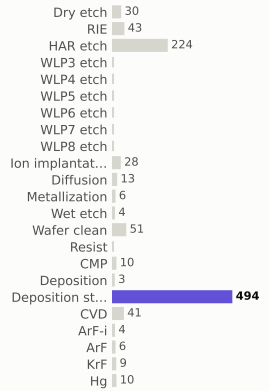

materials deposited (g)

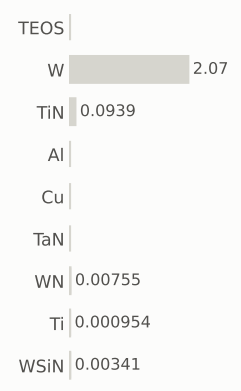

gases emitted (g)

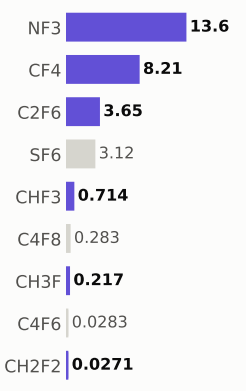

Step #12600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,322.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

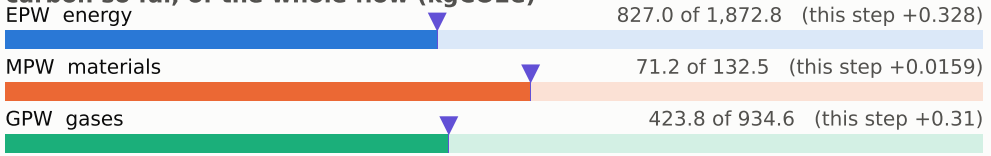

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

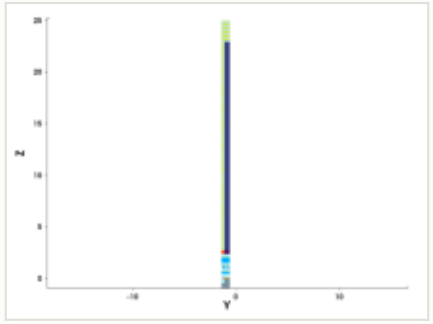

y cut at -1.035 µm

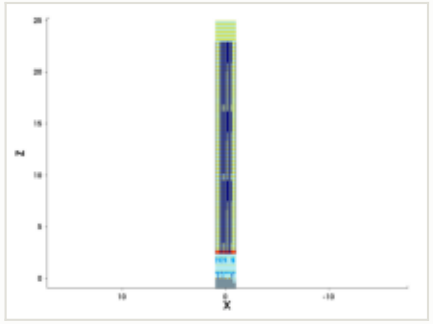

mask for this step

no mask for this step

steps by process area

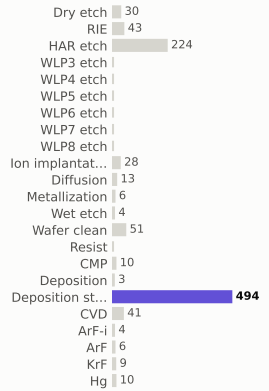

materials deposited (g)

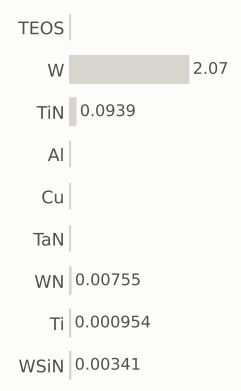

gases emitted (g)

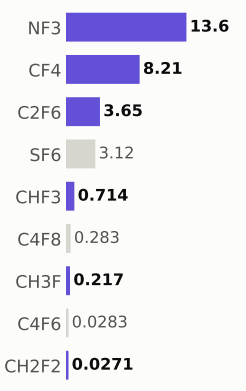

Step #12610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,322.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

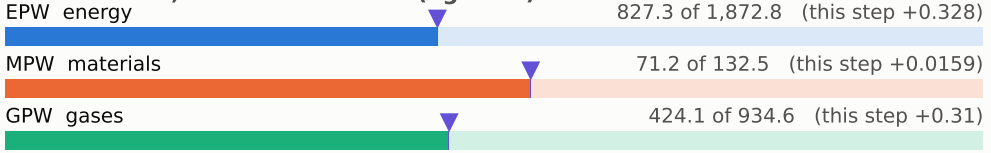

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

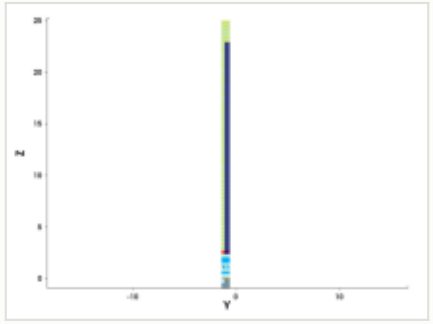

y cut at -1.035 µm

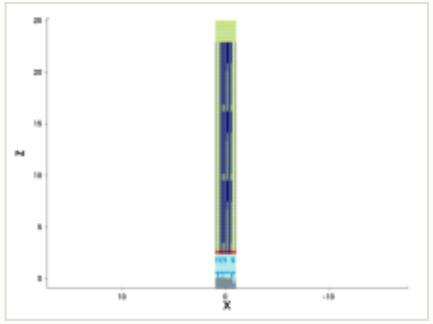

mask for this step

no mask for this step

steps by process area

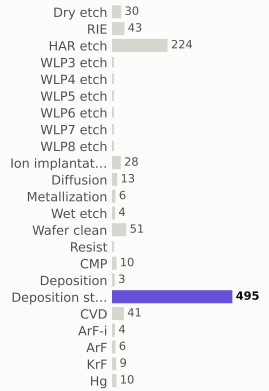

materials deposited (g)

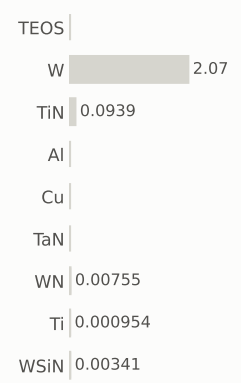

gases emitted (g)

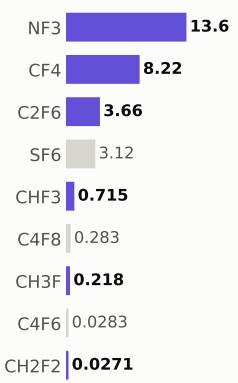

Step #12620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,323.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

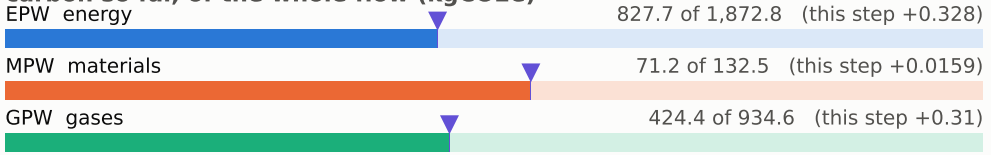

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

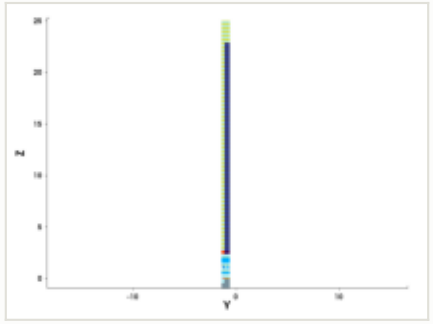

y cut at -1.035 µm

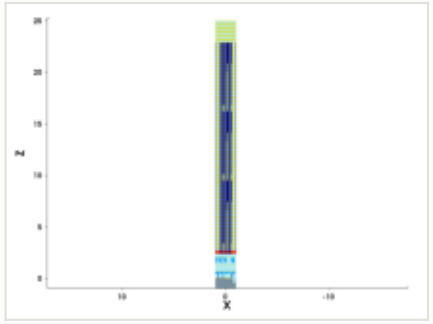

mask for this step

no mask for this step

steps by process area

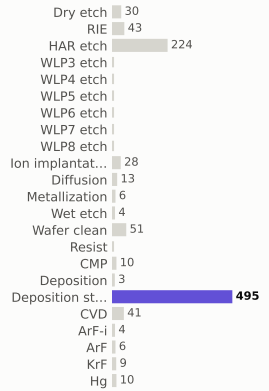

materials deposited (g)

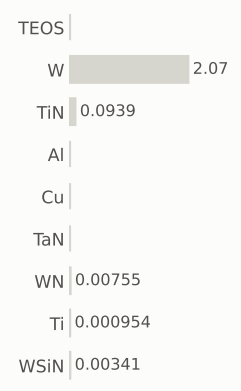

gases emitted (g)

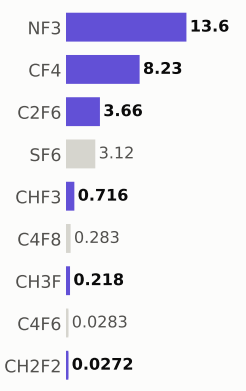

Step #12630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,323.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

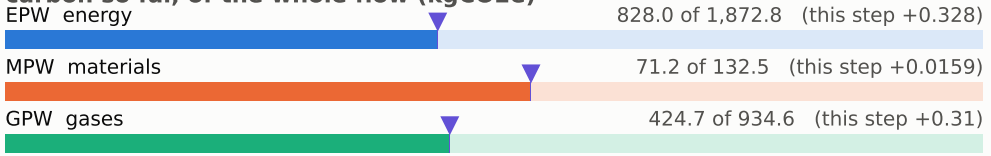

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

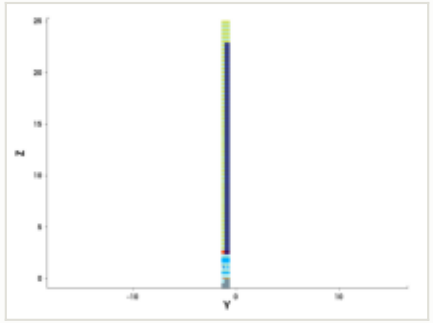

y cut at -1.035 µm

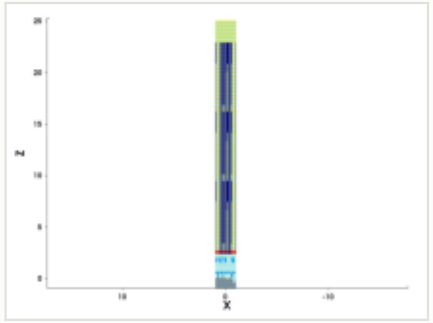

mask for this step

no mask for this step

steps by process area

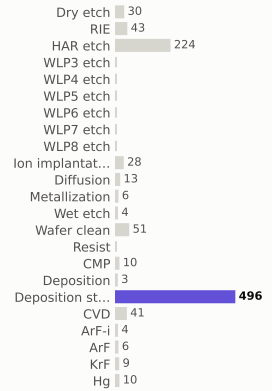

materials deposited (g)

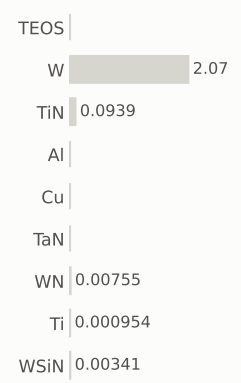

gases emitted (g)

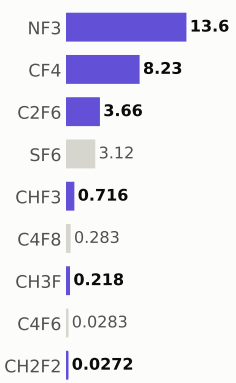

Step #12640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,324.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

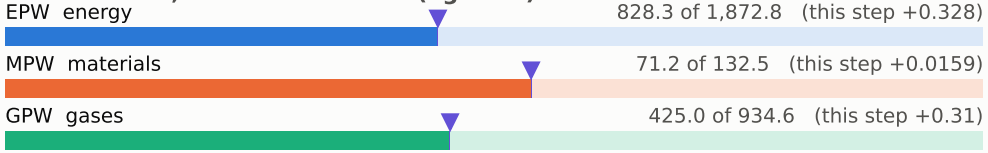

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

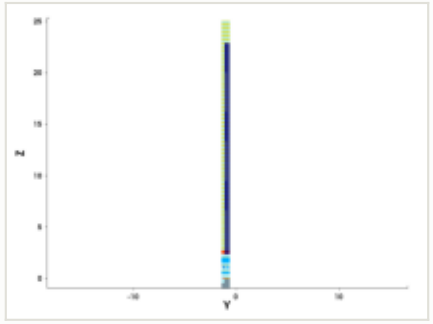

y cut at -1.035 µm

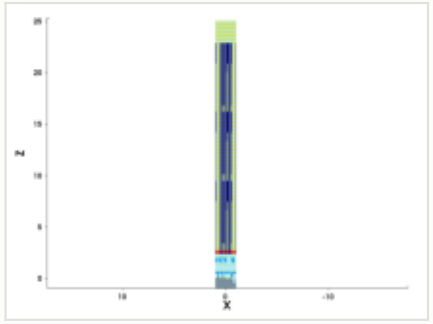

mask for this step

no mask for this step

steps by process area

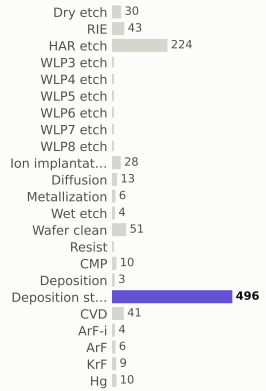

materials deposited (g)

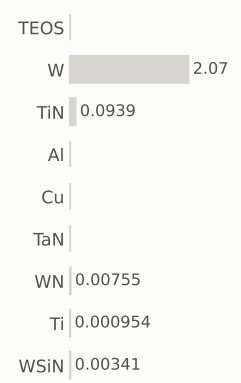

gases emitted (g)

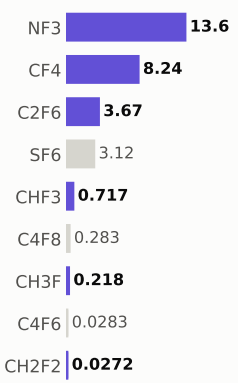

Step #12650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,325.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

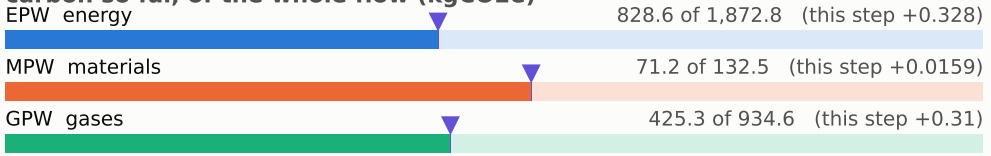

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

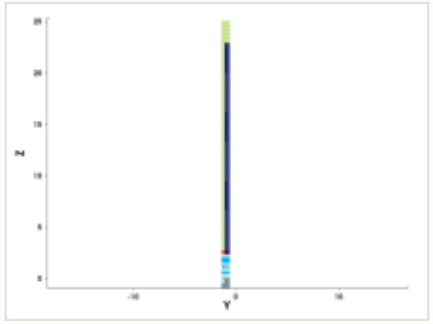

y cut at -1.035 µm

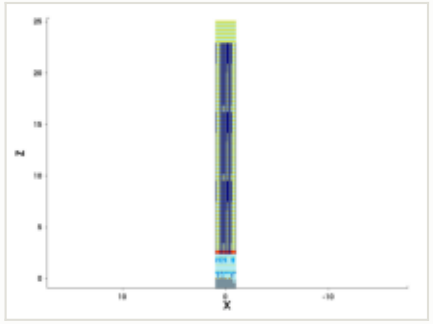

mask for this step

no mask for this step

steps by process area

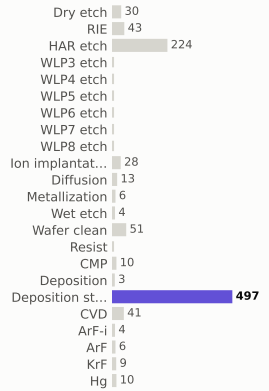

materials deposited (g)

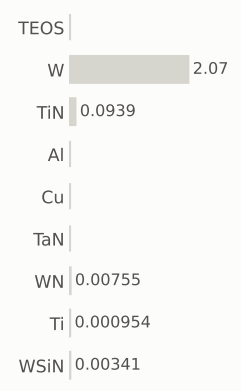

gases emitted (g)



Step #12660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,325.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

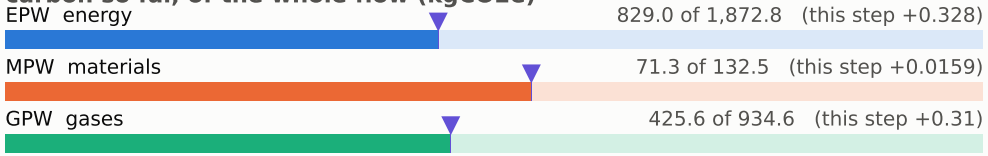

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

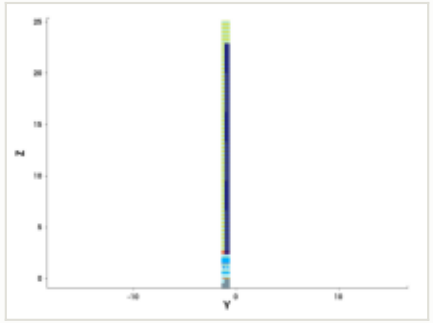

y cut at -1.035 µm

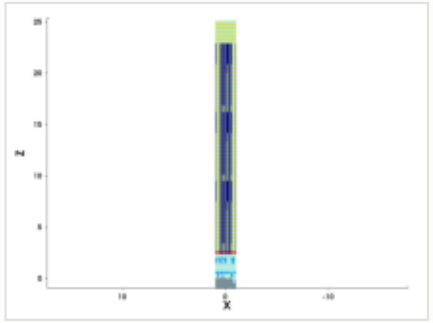

mask for this step

no mask for this step

steps by process area

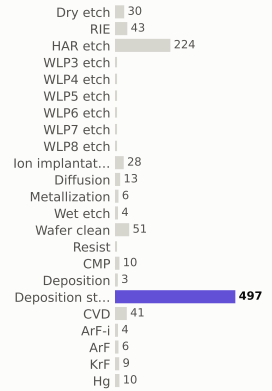

materials deposited (g)

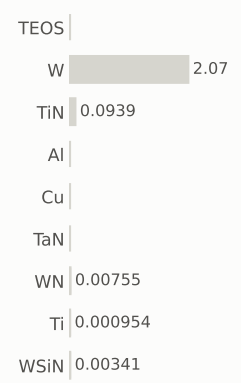

gases emitted (g)

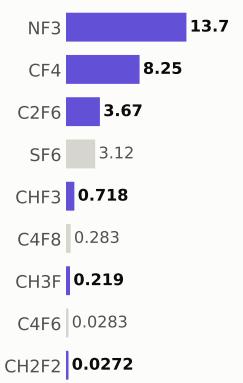

Step #12670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,326.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

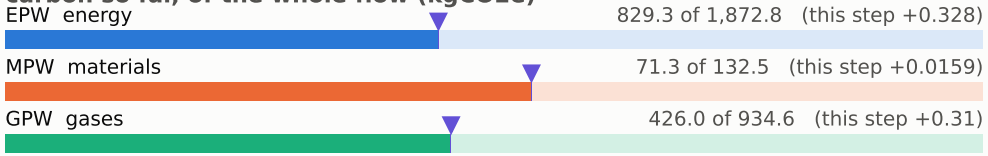

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

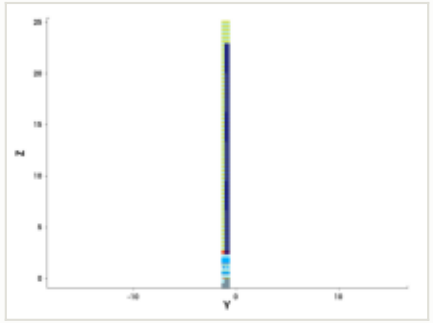

y cut at -1.035 µm

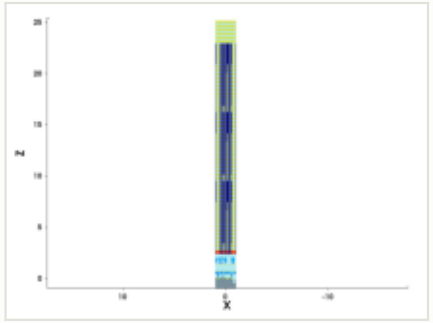

mask for this step

no mask for this step

steps by process area

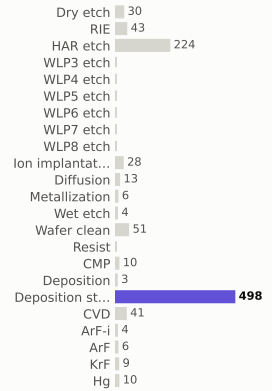

materials deposited (g)

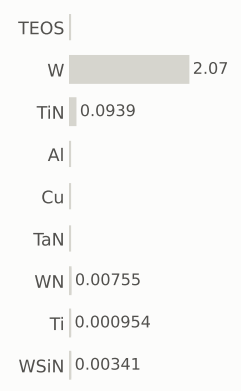

gases emitted (g)

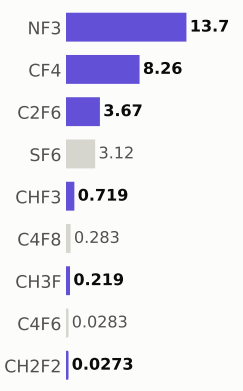

Step #12680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,327.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

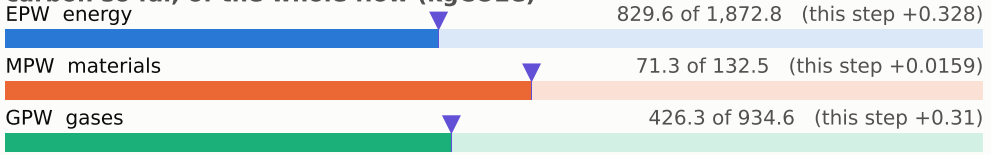

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

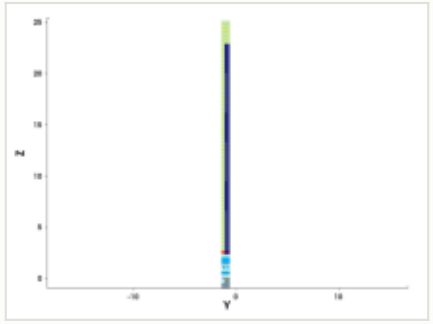

y cut at -1.035 µm

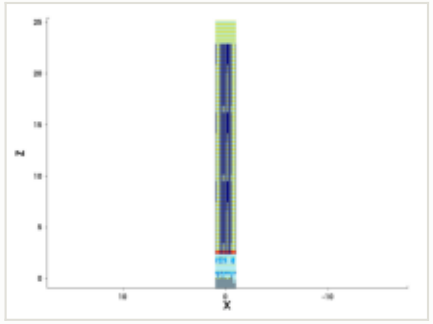

mask for this step

no mask for this step

steps by process area

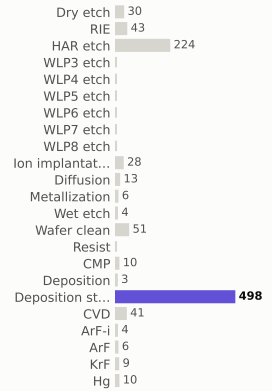

materials deposited (g)

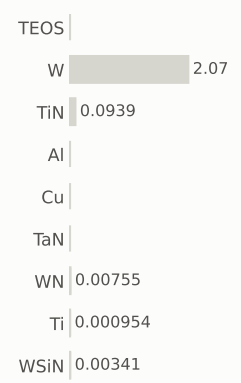

gases emitted (g)

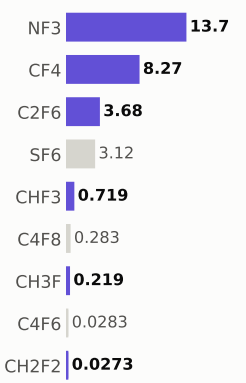

Step #12690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,327.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

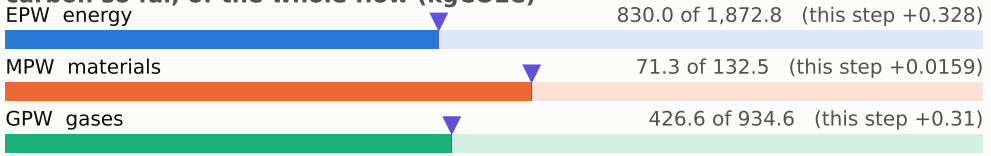

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

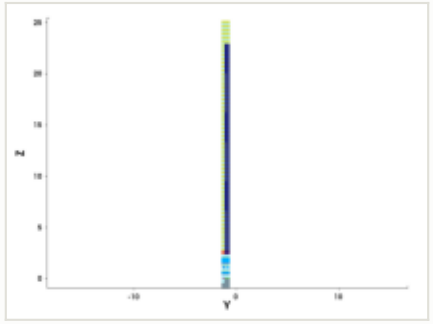

y cut at -1.035 µm

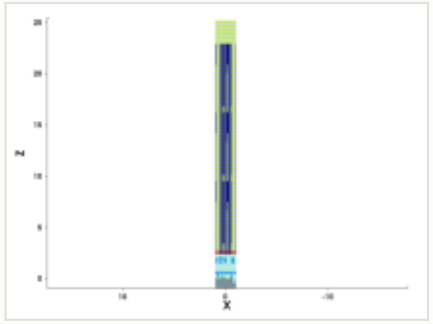

mask for this step

no mask for this step

steps by process area

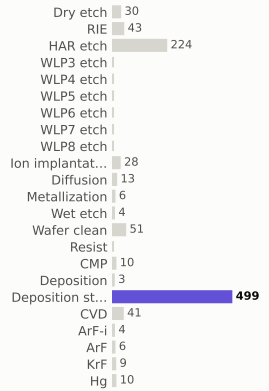

materials deposited (g)

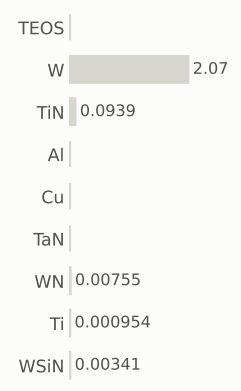

gases emitted (g)

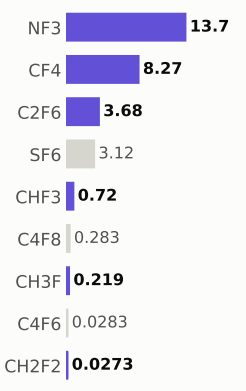

Step #12700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,328.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

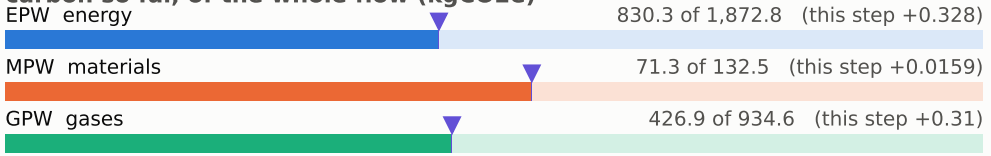

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

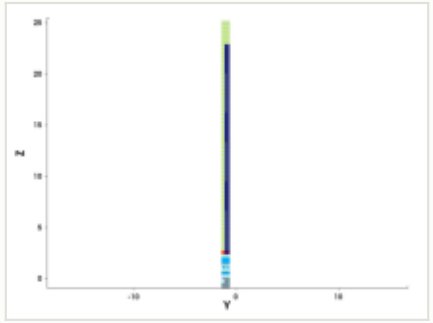

y cut at -1.035 µm

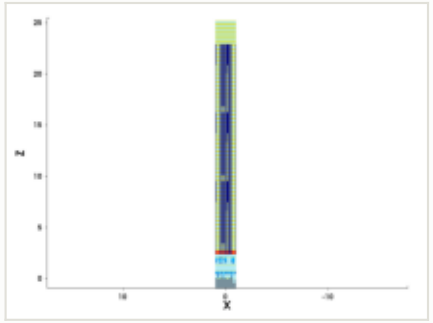

mask for this step

no mask for this step

steps by process area

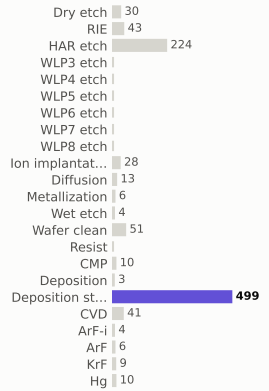

materials deposited (g)

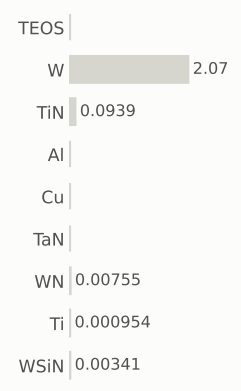

gases emitted (g)

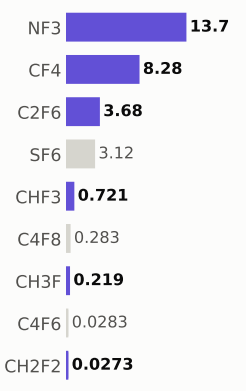

Step #12710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,329.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

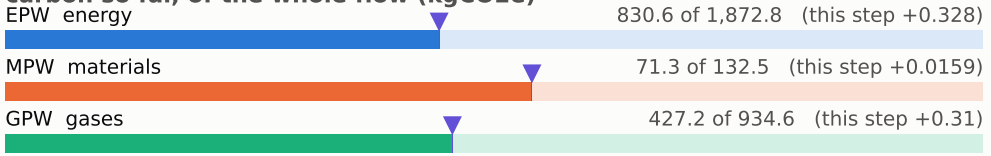

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

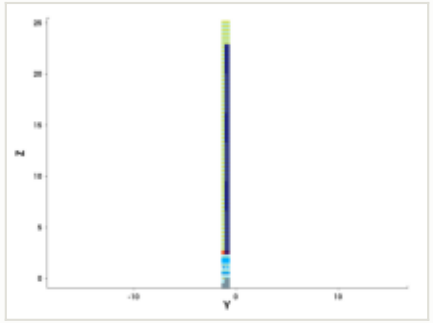

y cut at -1.035 µm

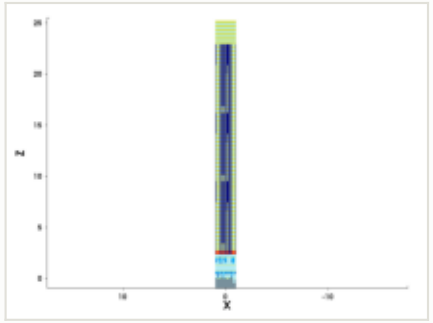

mask for this step

no mask for this step

steps by process area

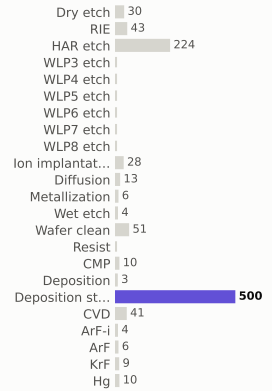

materials deposited (g)

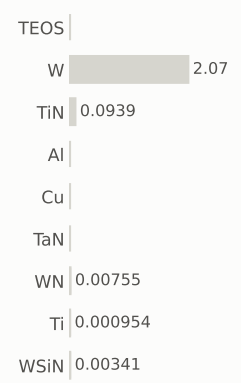

gases emitted (g)

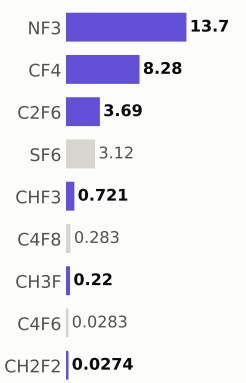

Step #12720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,329.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

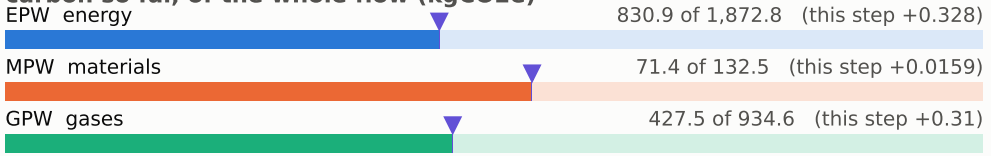

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

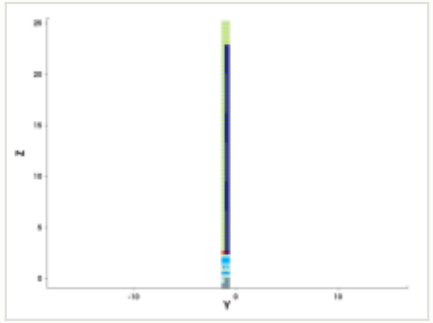

y cut at -1.035 µm

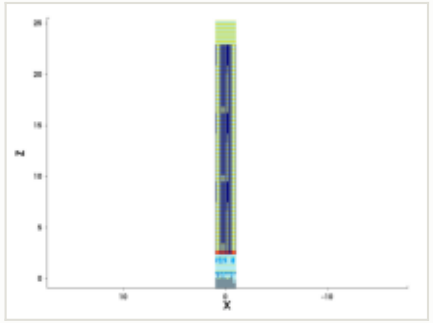

mask for this step

no mask for this step

steps by process area

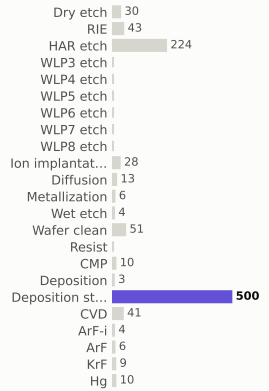

materials deposited (g)

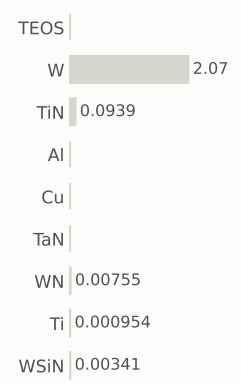

gases emitted (g)

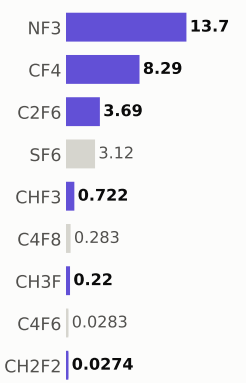

Step #12730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,330.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

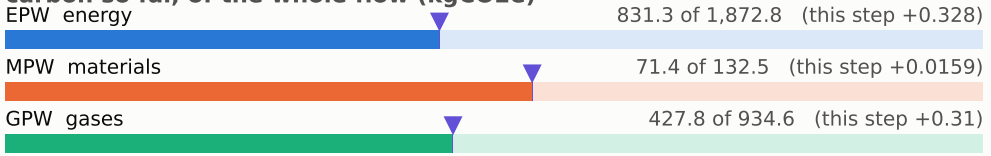

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

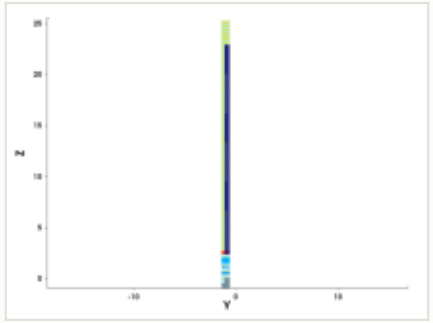

y cut at -1.035 µm

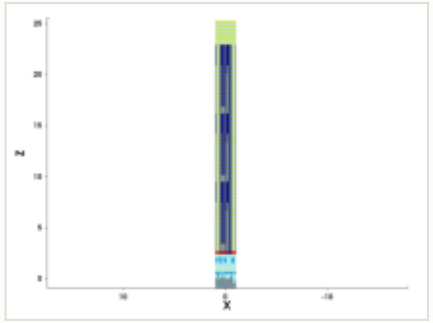

mask for this step

no mask for this step

steps by process area

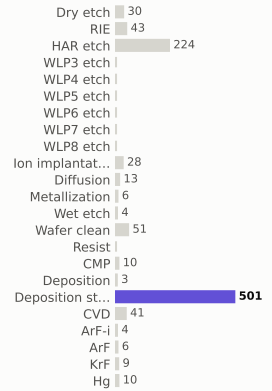

materials deposited (g)

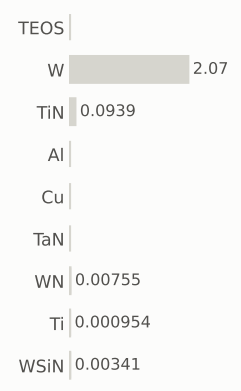

gases emitted (g)

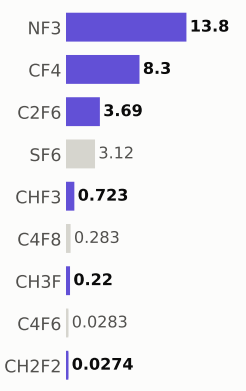

Step #12740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,331.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 831.6 of 1,872.8 (this step +0.328)

MPW materials — 71.4 of 132.5 (this step +0.0159)

GPW gases — 428.1 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

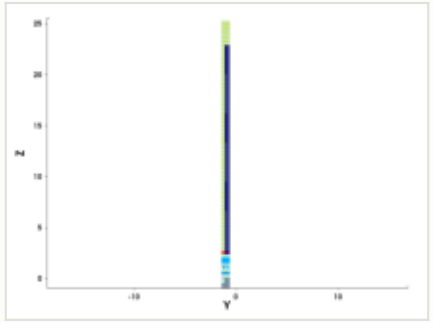

y cut at -1.035 µm

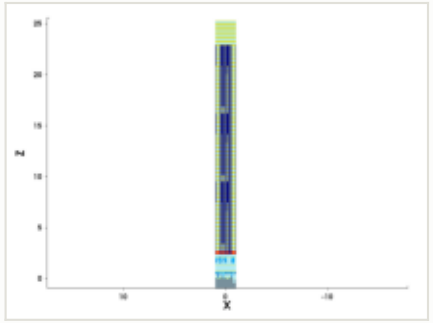

mask for this step

no mask for this step

steps by process area

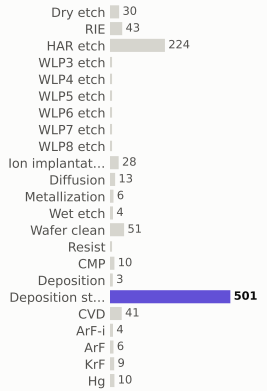

materials deposited (g)

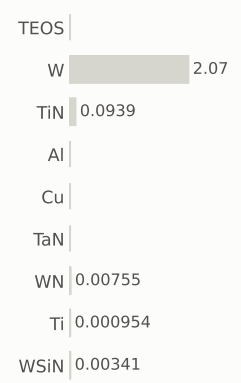

gases emitted (g)

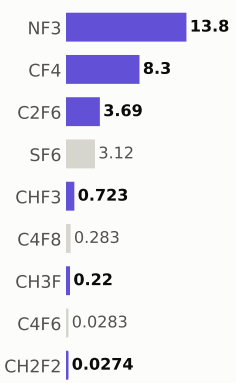

Step #12750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,331.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

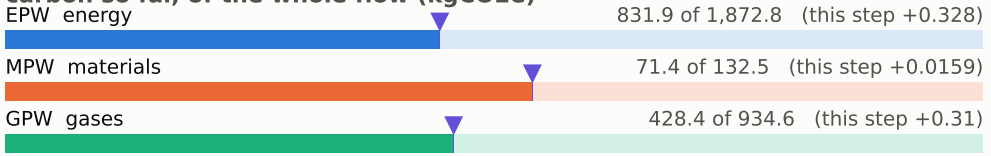

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

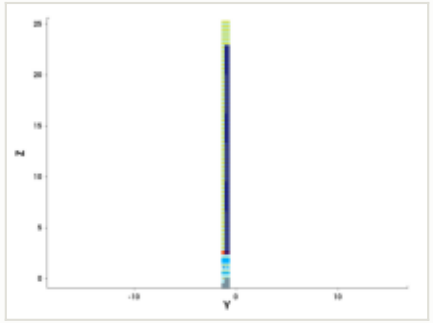

y cut at -1.035 µm

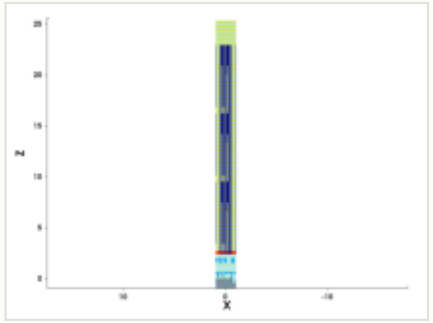

mask for this step

no mask for this step

steps by process area

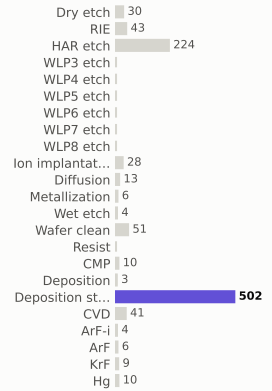

materials deposited (g)

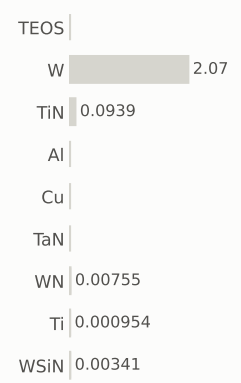

gases emitted (g)

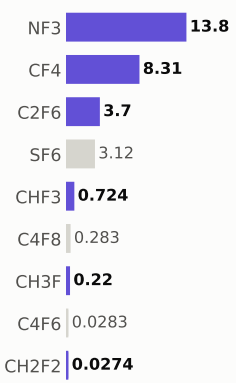

Step #12760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,332.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

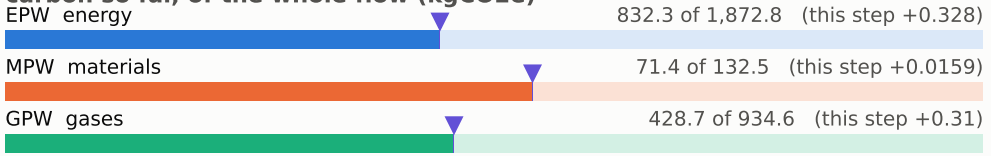

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

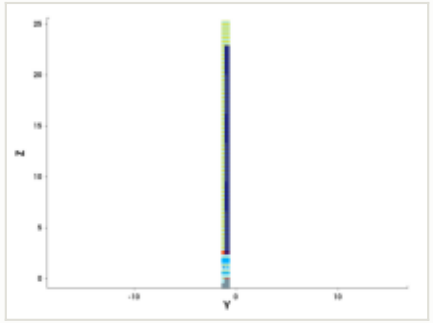

y cut at -1.035 µm

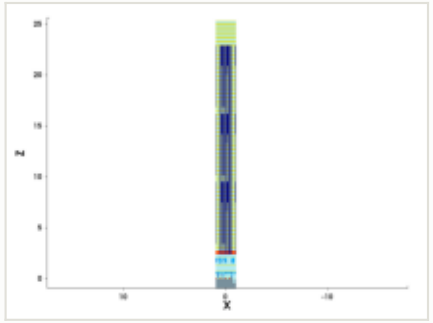

mask for this step

no mask for this step

steps by process area

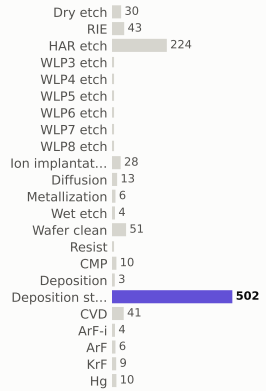

materials deposited (g)

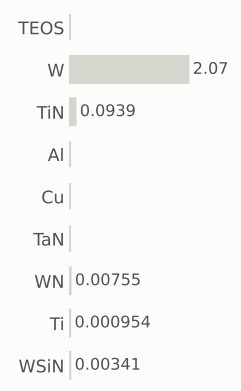

gases emitted (g)

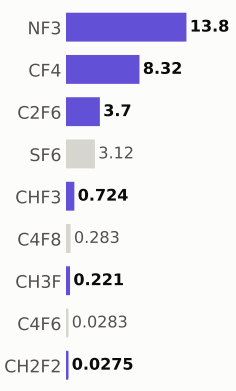

Step #12770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,333.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

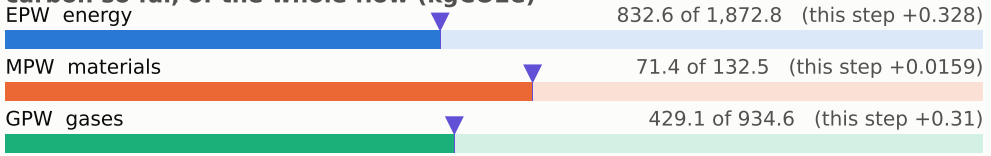

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

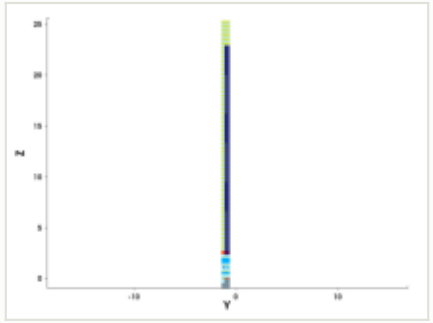

y cut at -1.035 µm

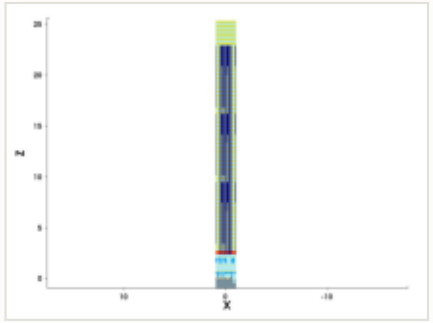

mask for this step

no mask for this step

steps by process area

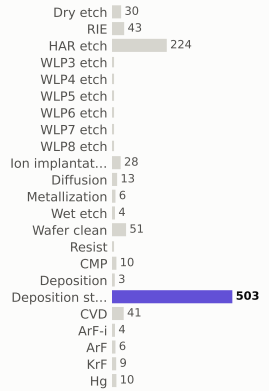

materials deposited (g)

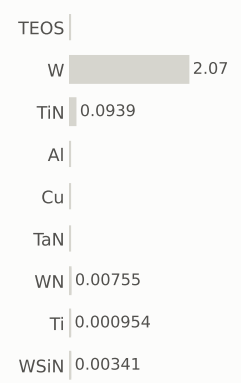

gases emitted (g)

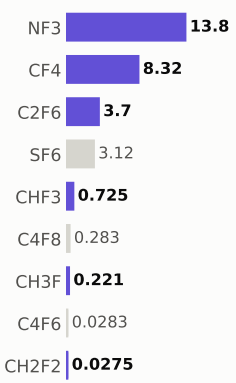

Step #12780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,333.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 832.9 of 1,872.8 (this step +0.328)

MPW materials — 71.5 of 132.5 (this step +0.0159)

GPW gases — 429.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

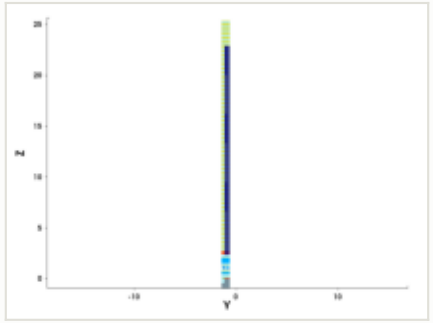

y cut at -1.035 µm

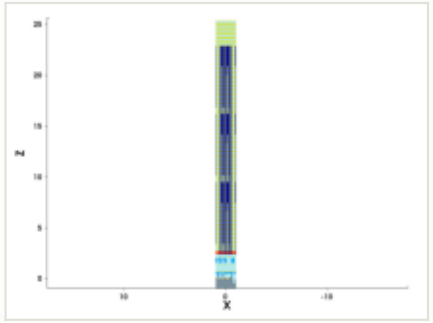

mask for this step

no mask for this step

steps by process area

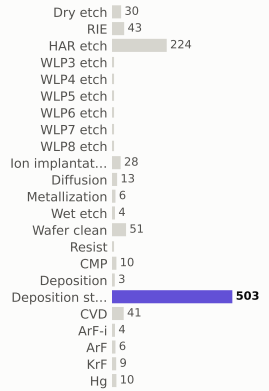

materials deposited (g)

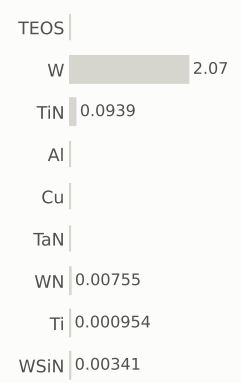

gases emitted (g)

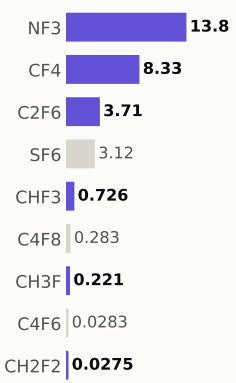

Step #12790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,334.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

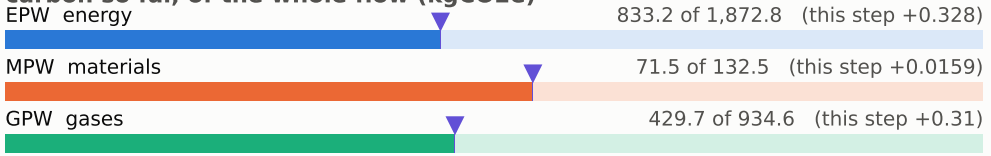

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

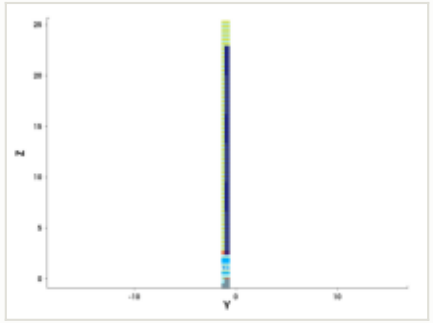

y cut at -1.035 µm

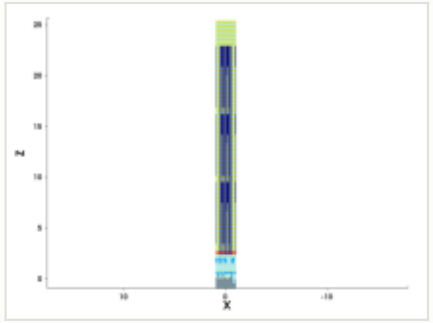

mask for this step

no mask for this step

steps by process area

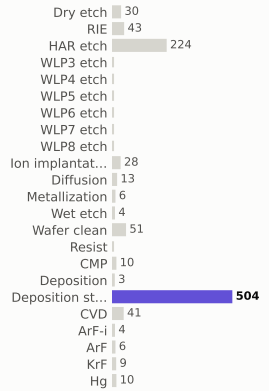

materials deposited (g)

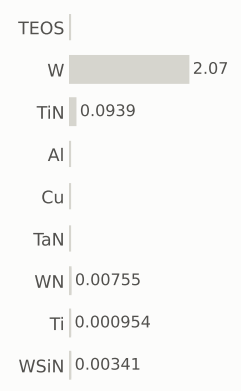

gases emitted (g)

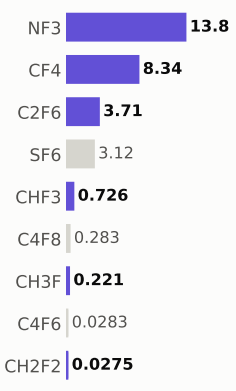

Step #12800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,335.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

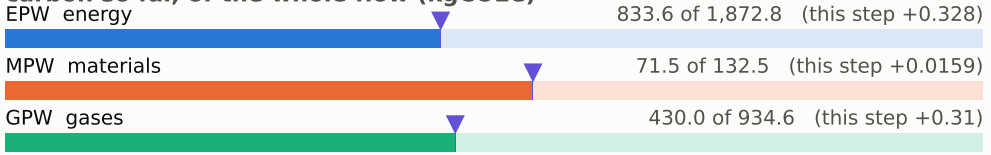

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

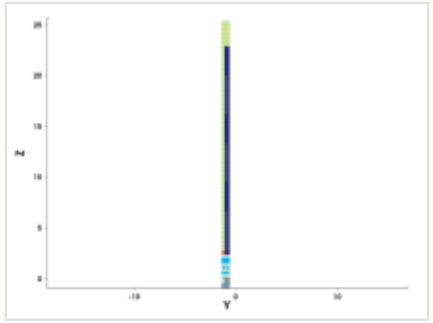

y cut at -1.035 µm

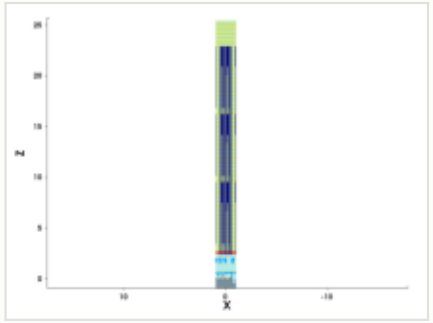

mask for this step

no mask for this step

steps by process area

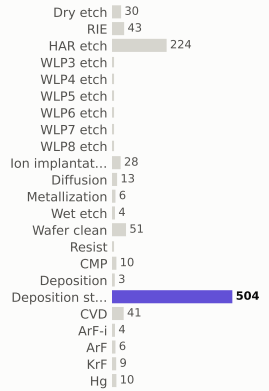

materials deposited (g)

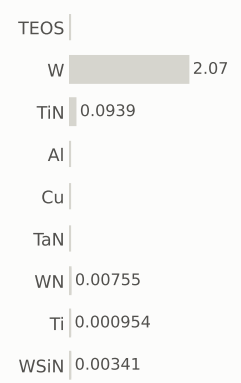

gases emitted (g)

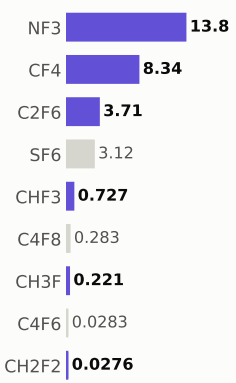

Step #12810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,335.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

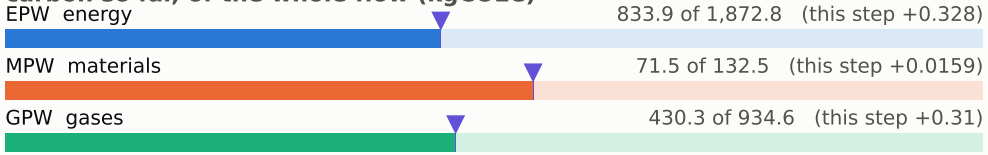

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

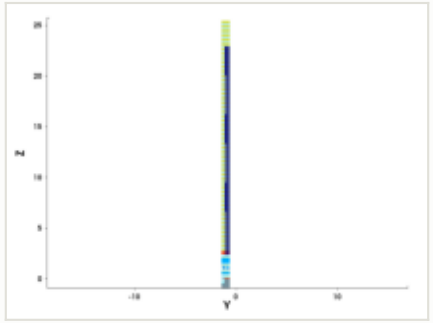

y cut at -1.035 µm

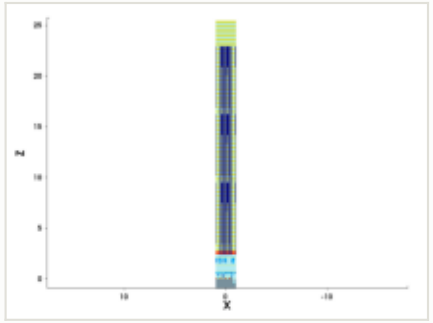

mask for this step

no mask for this step

steps by process area

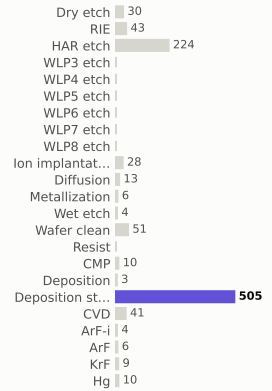

materials deposited (g)

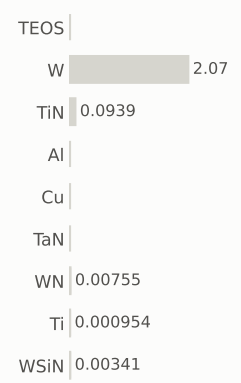

gases emitted (g)

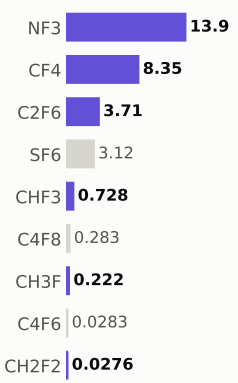

Step #12820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,336.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

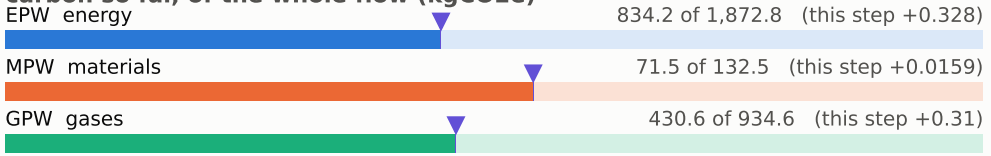

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

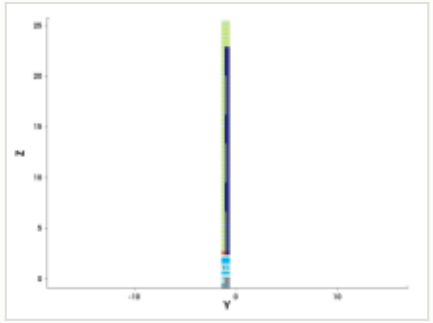

y cut at -1.035 µm

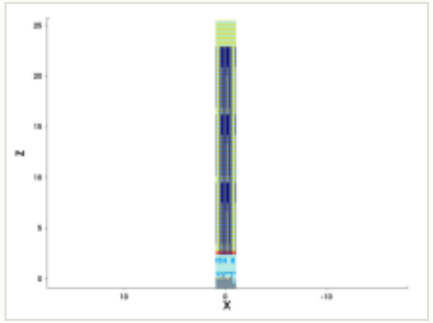

mask for this step

no mask for this step

steps by process area

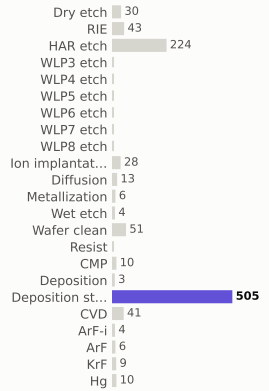

materials deposited (g)

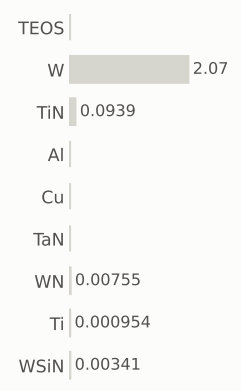

gases emitted (g)

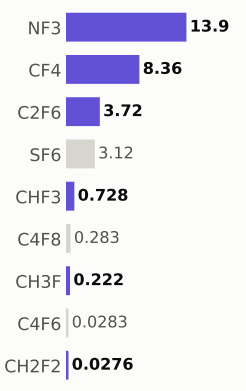

Step #12830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,337.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

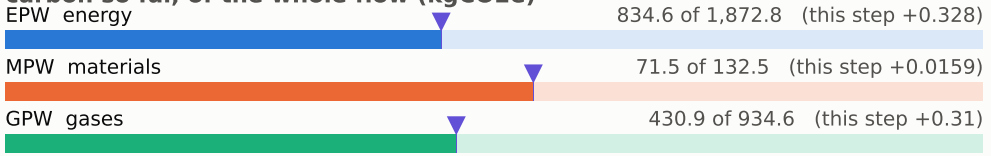

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

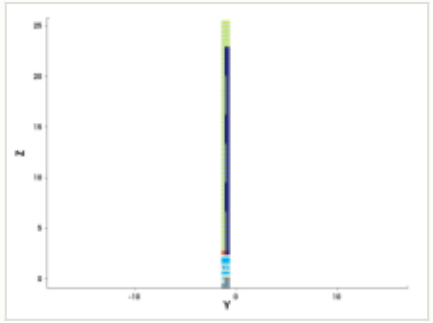

y cut at -1.035 µm

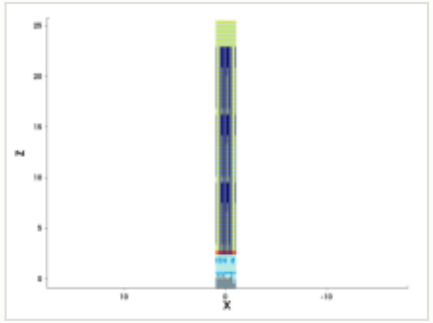

mask for this step

no mask for this step

steps by process area

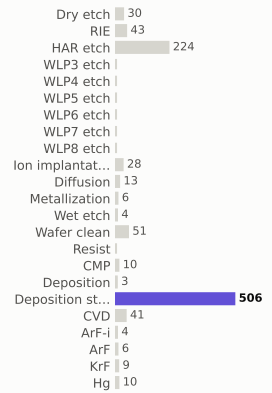

materials deposited (g)

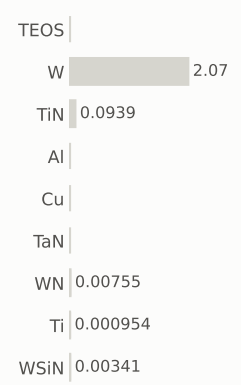

gases emitted (g)

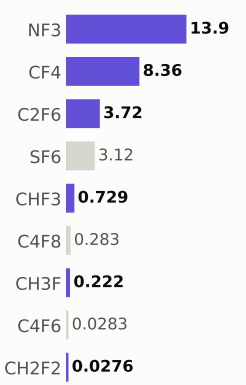

Step #12840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,337.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

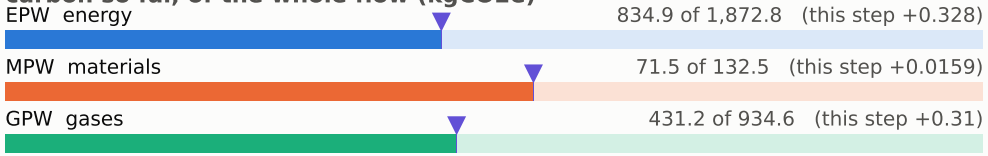

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

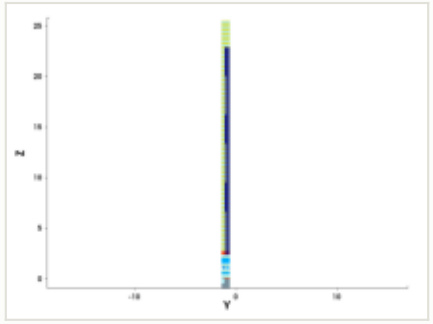

y cut at -1.035 µm

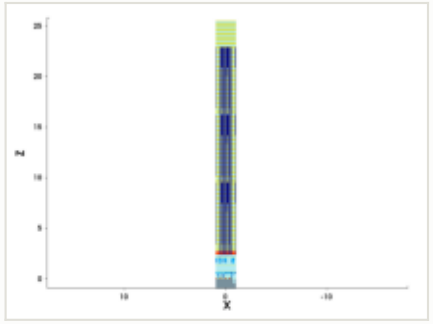

mask for this step

no mask for this step

steps by process area

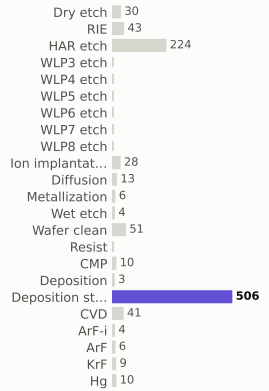

materials deposited (g)

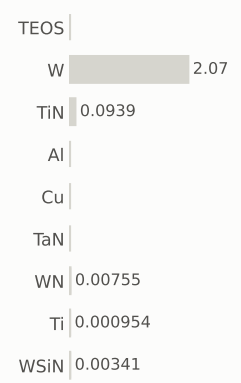

gases emitted (g)

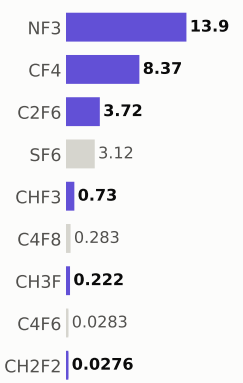

Step #12850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,338.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

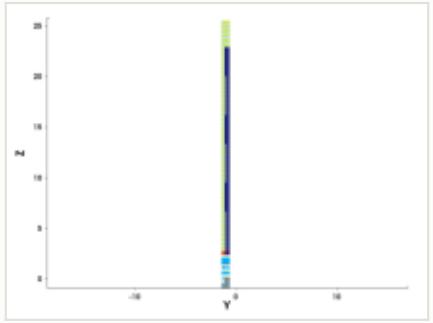

y cut at -1.035 µm

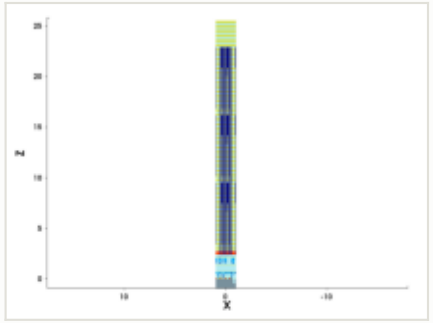

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

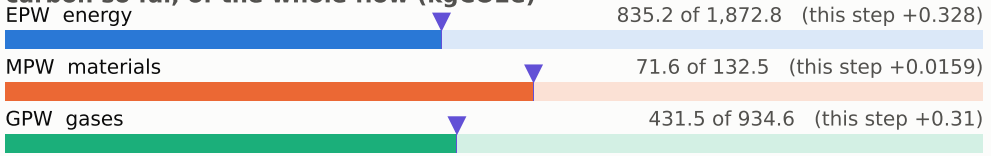

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

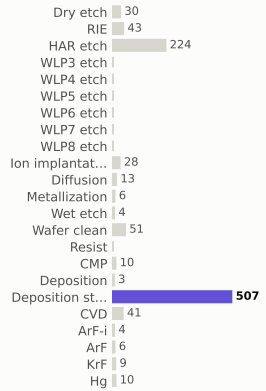

materials deposited (g)

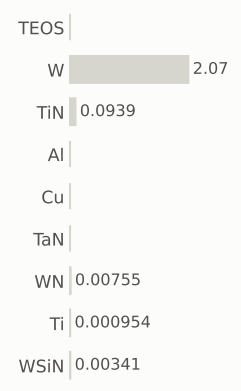

gases emitted (g)

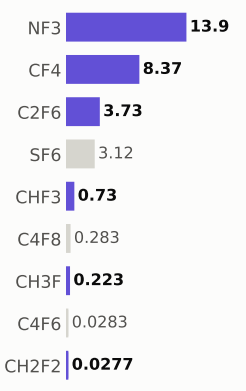

Step #12860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,339.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

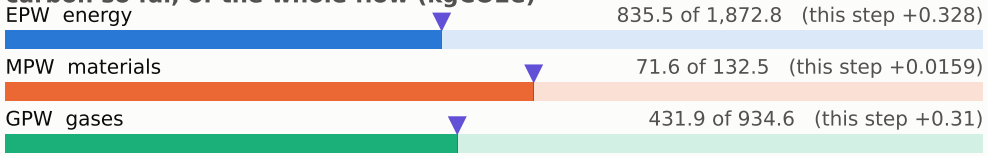

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

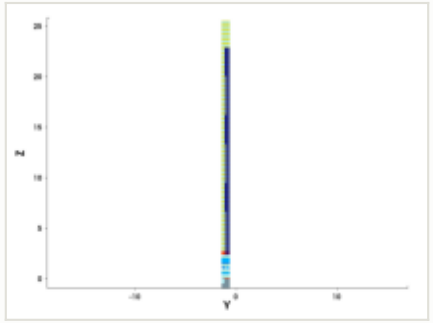

y cut at -1.035 µm

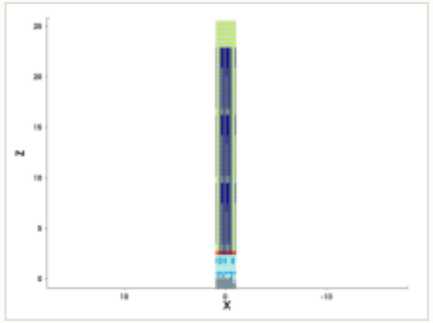

mask for this step

no mask for this step

steps by process area

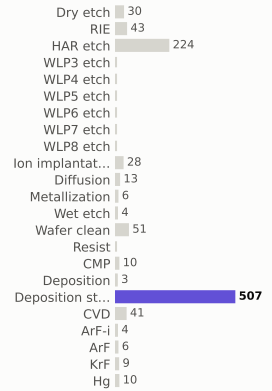

materials deposited (g)

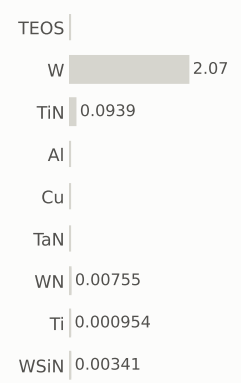

gases emitted (g)

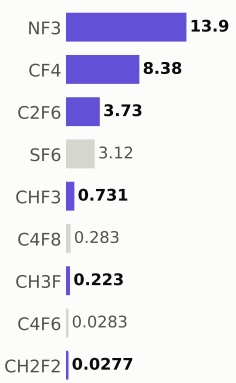

Step #12870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,339.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

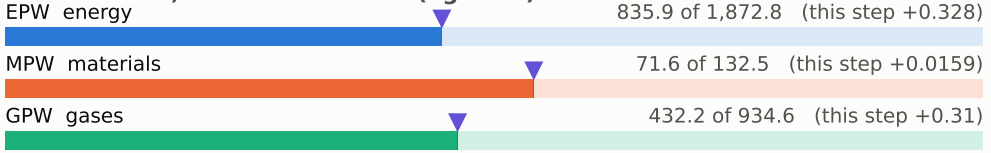

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

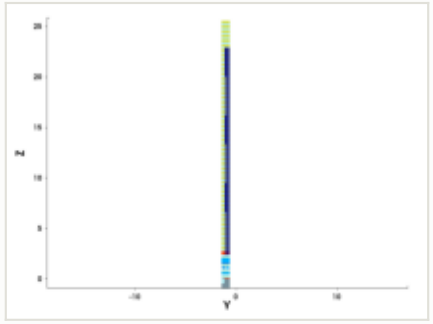

y cut at -1.035 µm

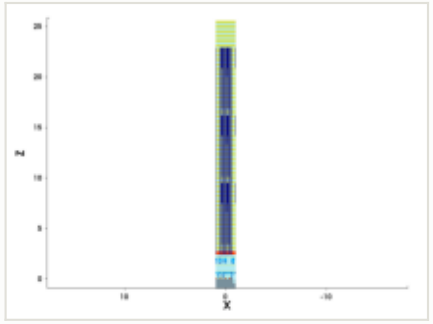

mask for this step

no mask for this step

steps by process area

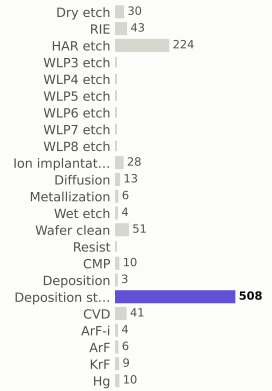

materials deposited (g)

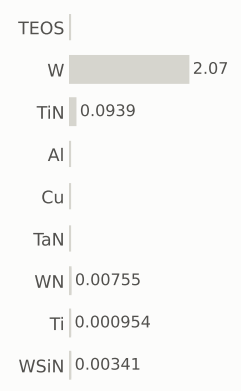

gases emitted (g)

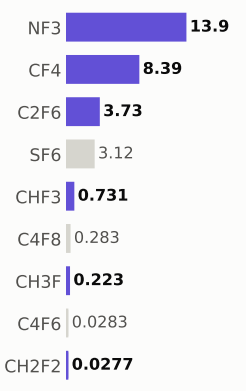

Step #12880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,340.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

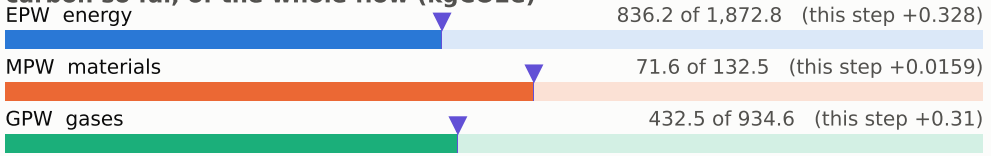

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

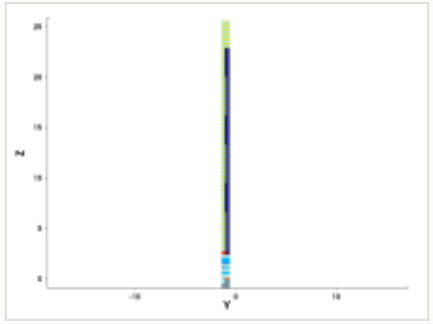

y cut at -1.035 µm

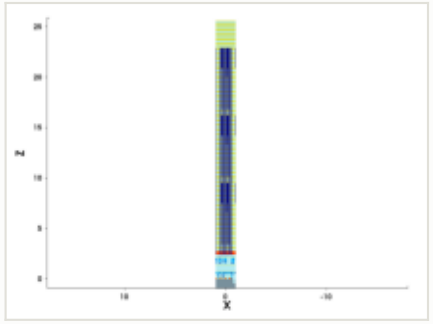

mask for this step

no mask for this step

steps by process area

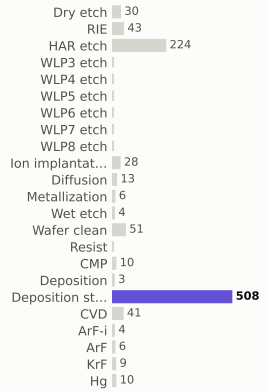

materials deposited (g)

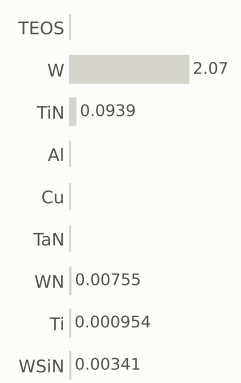

gases emitted (g)

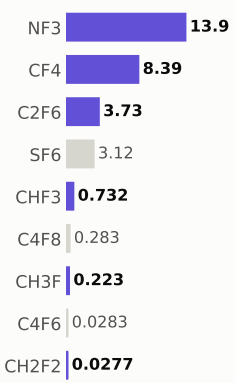

Step #12890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,340.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

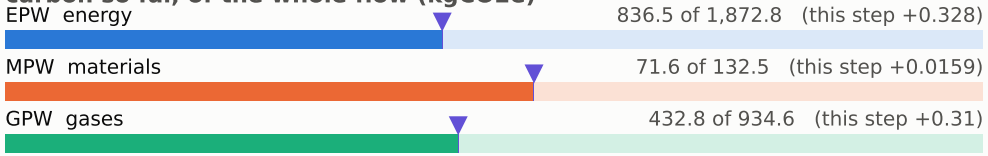

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

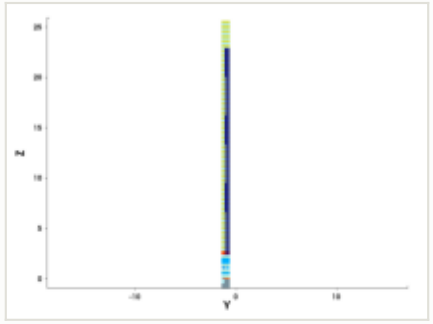

y cut at -1.035 µm

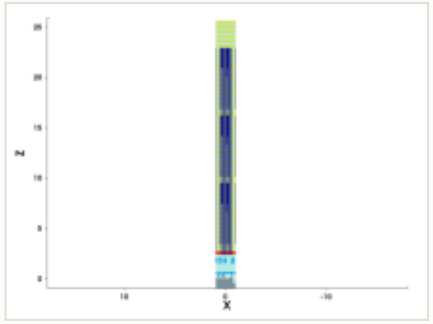

mask for this step

no mask for this step

steps by process area

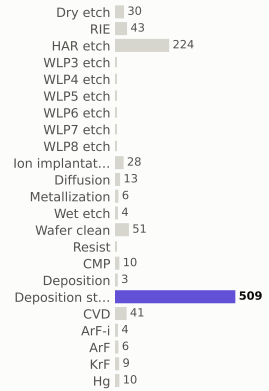

materials deposited (g)

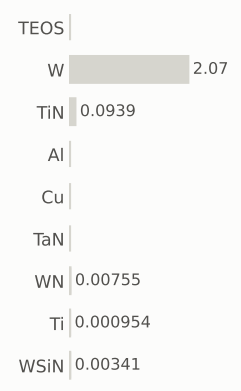

gases emitted (g)

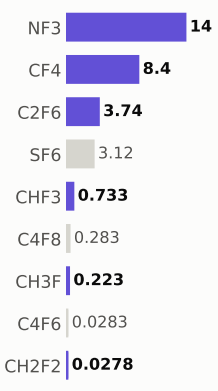

Step #12900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,341.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

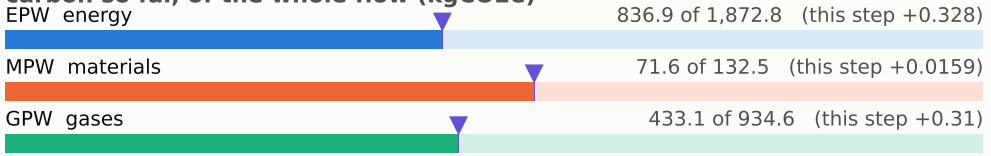

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

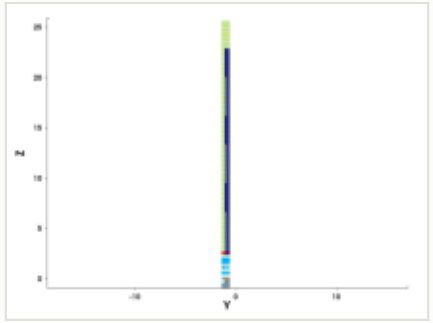

y cut at -1.035 µm

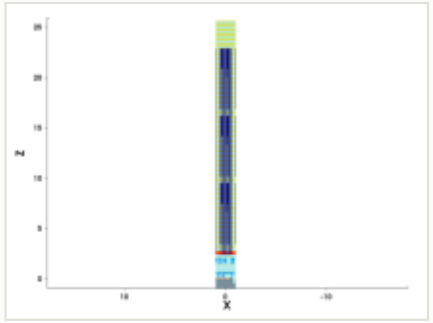

mask for this step

no mask for this step

steps by process area

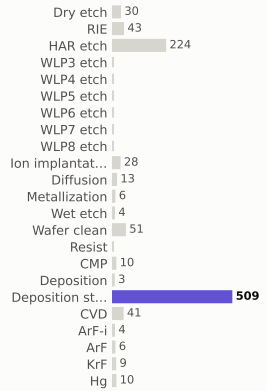

materials deposited (g)

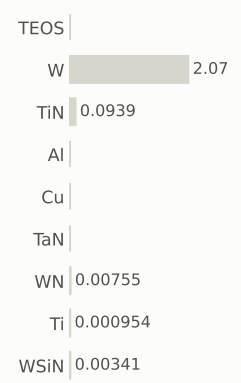

gases emitted (g)

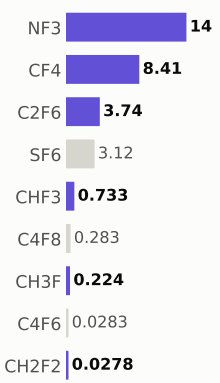

Step #12910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,342.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

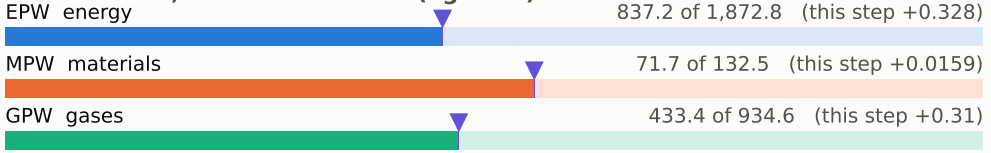

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

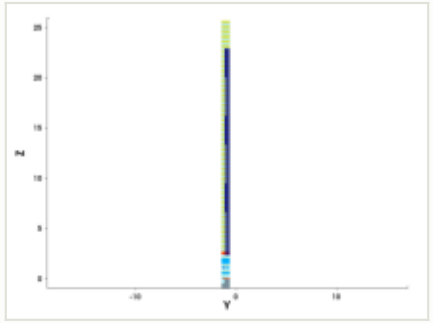

y cut at -1.035 µm

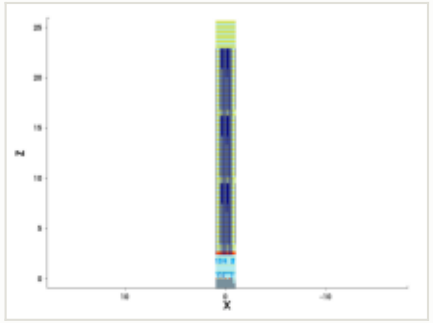

mask for this step

no mask for this step

steps by process area

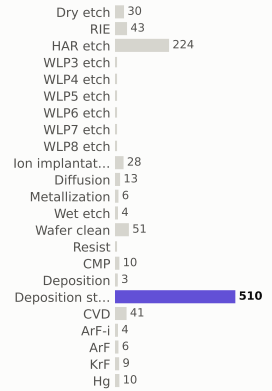

materials deposited (g)

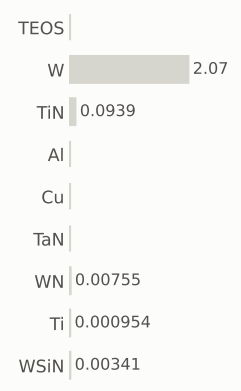

gases emitted (g)

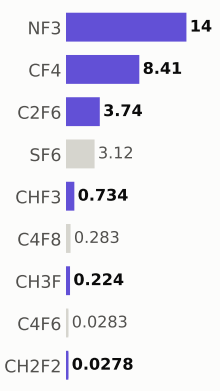

Step #12920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,342.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

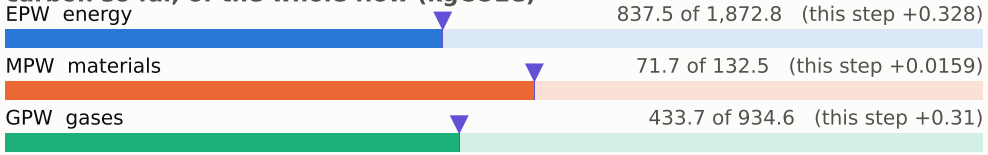

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

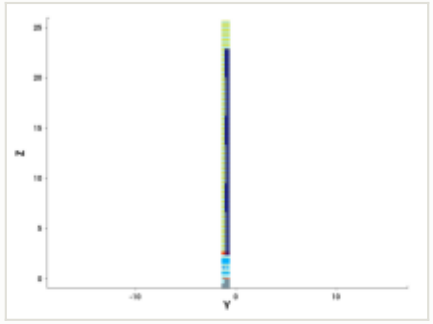

y cut at -1.035 µm

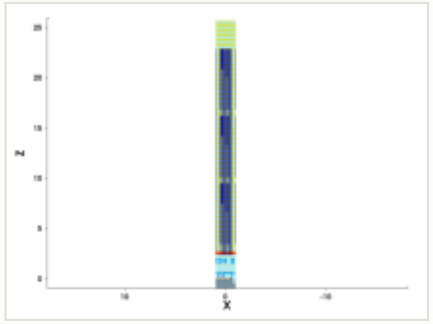

mask for this step

no mask for this step

steps by process area

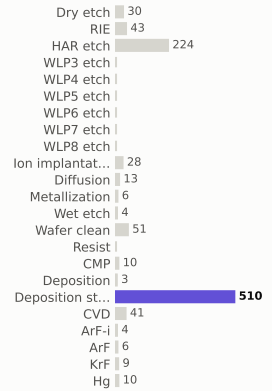

materials deposited (g)

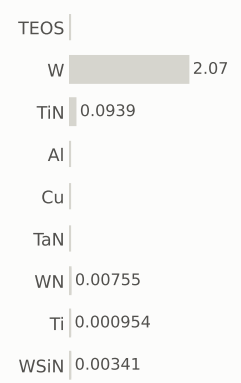

gases emitted (g)

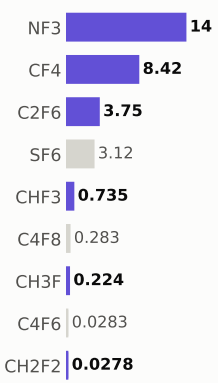

Step #12930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,343.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

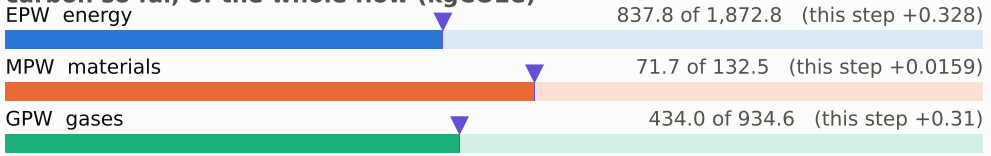

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

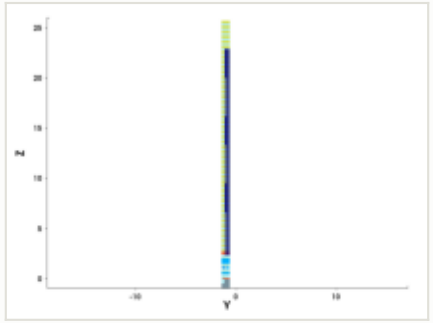

y cut at -1.035 µm

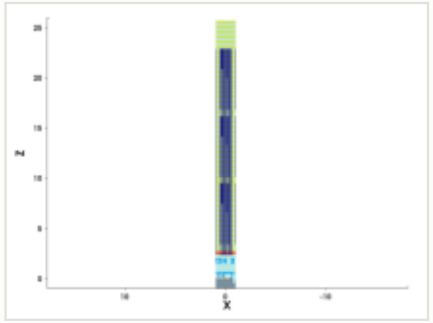

mask for this step

no mask for this step

steps by process area

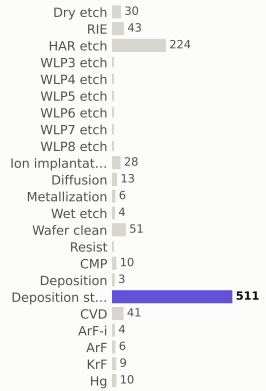

materials deposited (g)

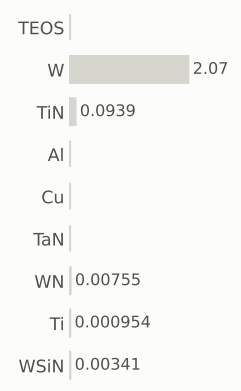

gases emitted (g)

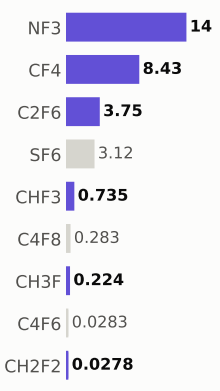

Step #12940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,344.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

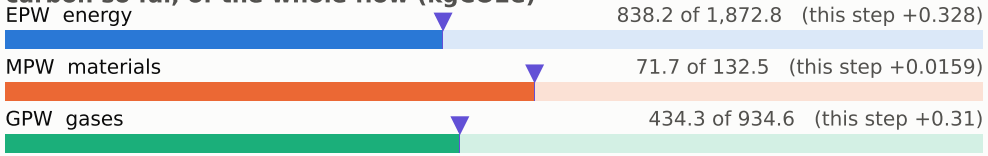

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

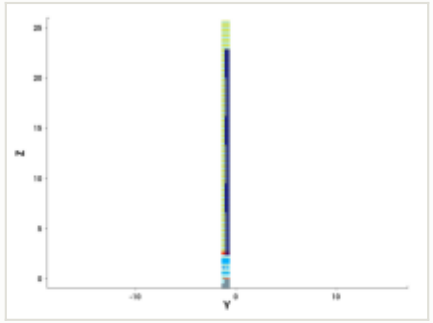

y cut at -1.035 µm

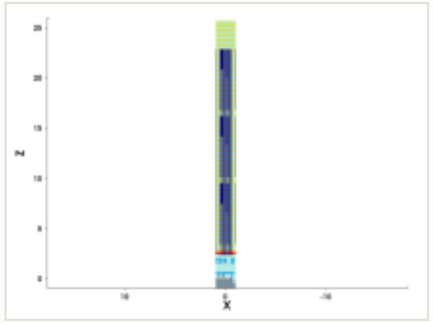

mask for this step

no mask for this step

steps by process area

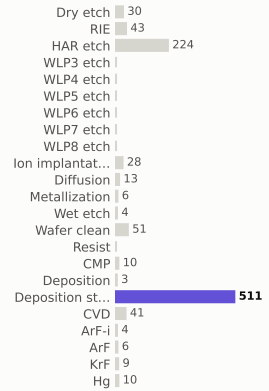

materials deposited (g)

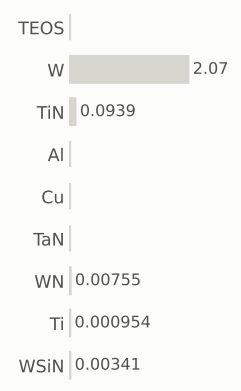

gases emitted (g)

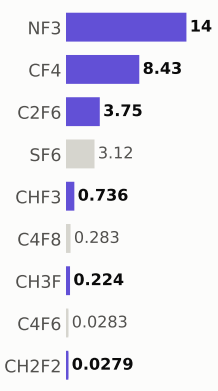

Step #12950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,344.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

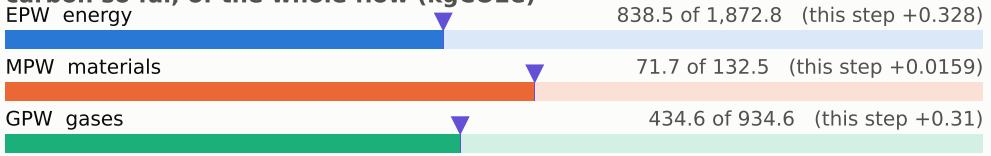

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

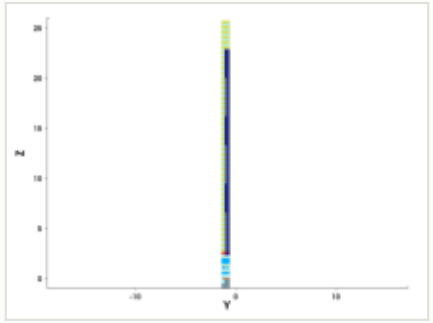

y cut at -1.035 µm

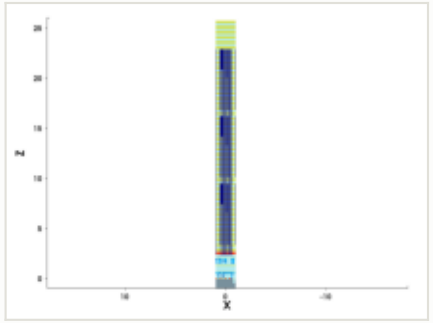

mask for this step

no mask for this step

steps by process area

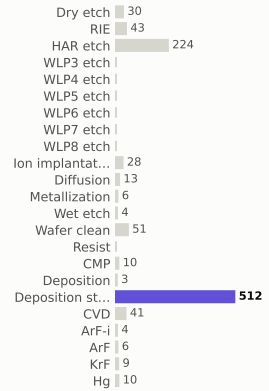

materials deposited (g)

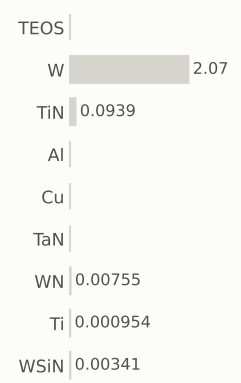

gases emitted (g)

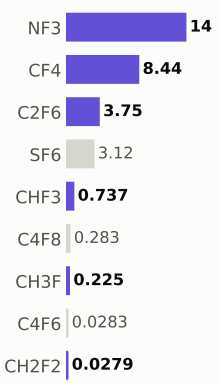

Step #12960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,345.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

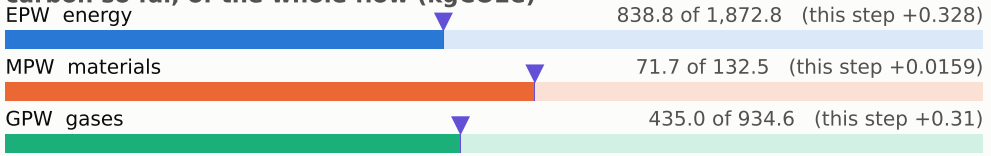

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

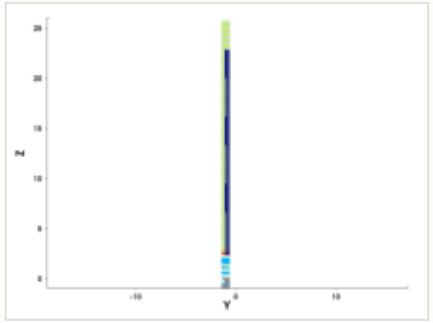

y cut at -1.035 µm

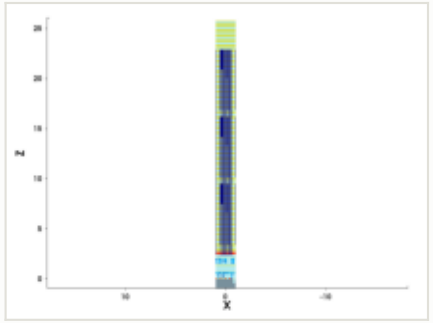

mask for this step

no mask for this step

steps by process area

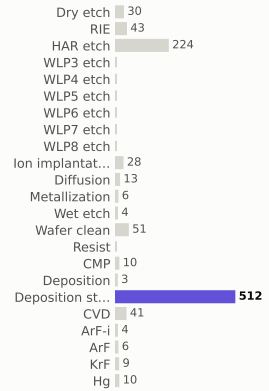

materials deposited (g)

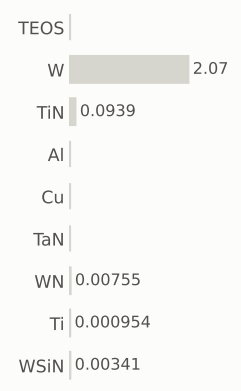

gases emitted (g)

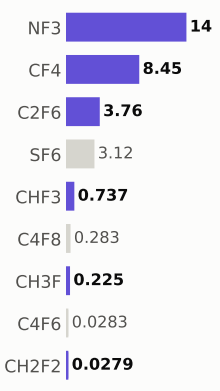

Step #12970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,346.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

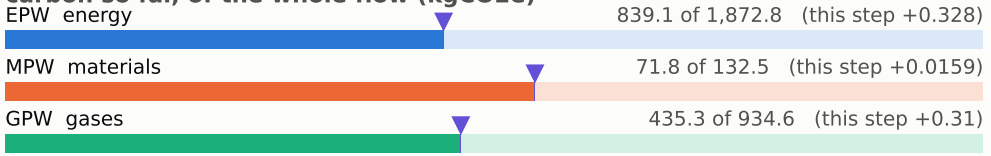

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

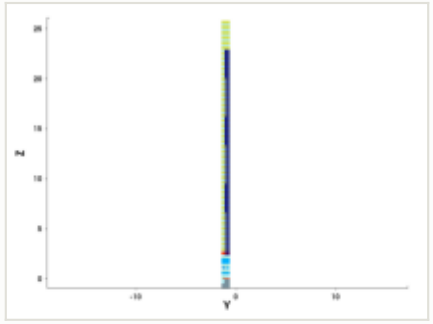

y cut at -1.035 µm

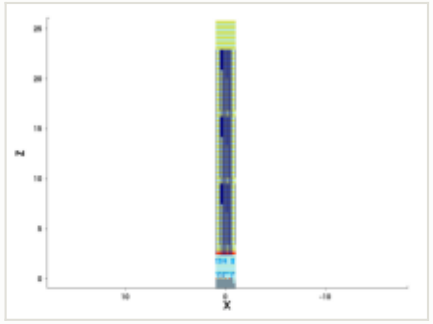

mask for this step

no mask for this step

steps by process area

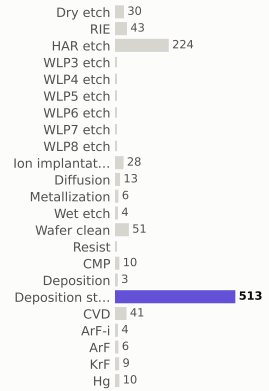

materials deposited (g)

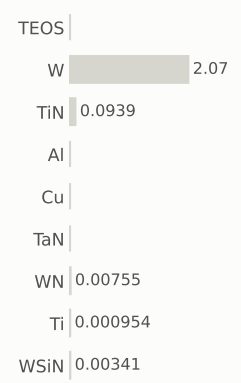

gases emitted (g)

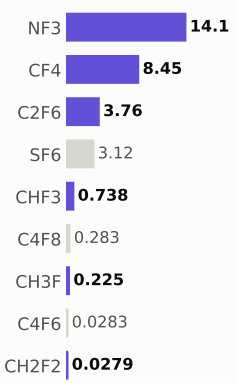

Step #12980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,346.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

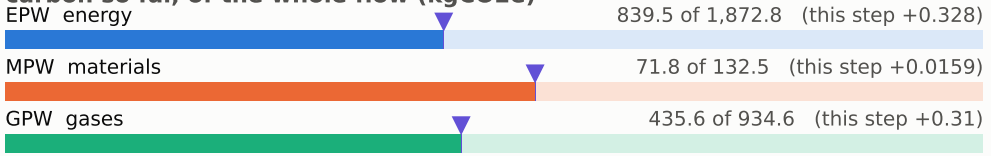

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

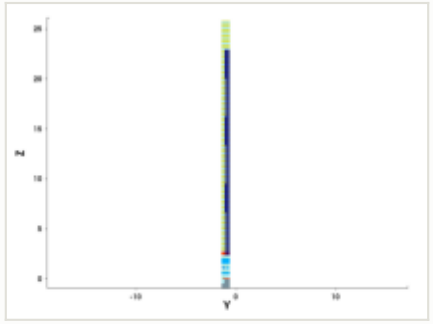

y cut at -1.035 µm

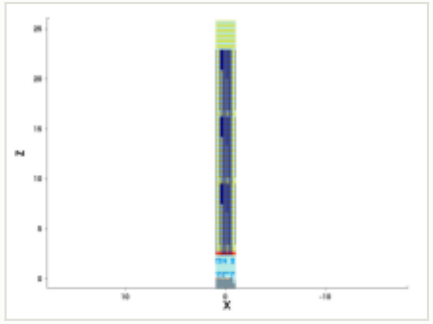

mask for this step

no mask for this step

steps by process area

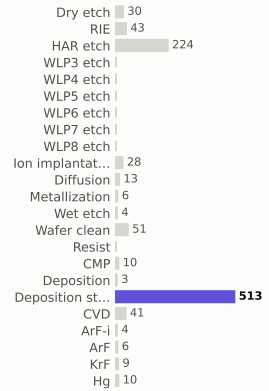

materials deposited (g)

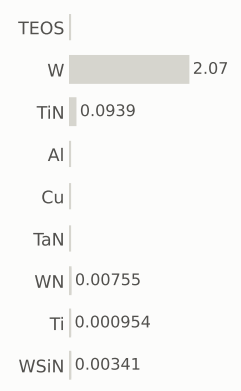

gases emitted (g)

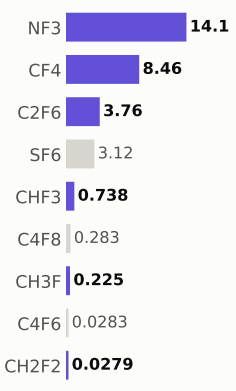

Step #12990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,347.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

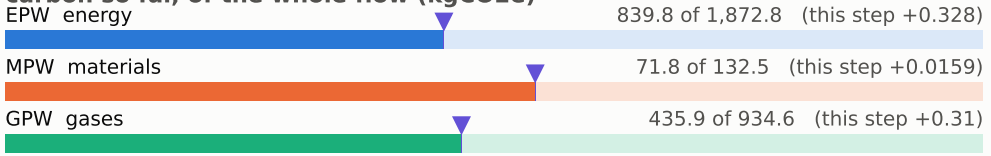

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

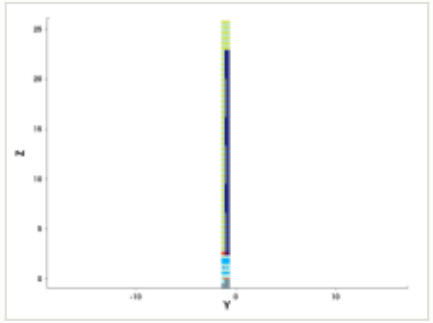

y cut at -1.035 µm

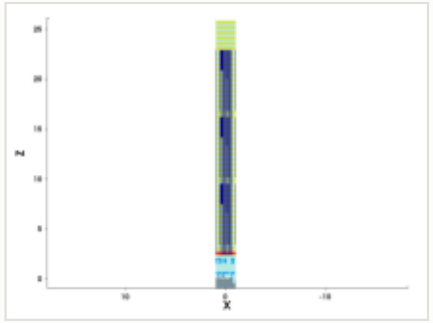

mask for this step

no mask for this step

steps by process area

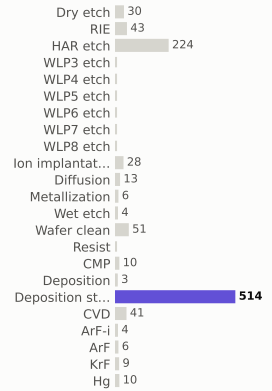

materials deposited (g)

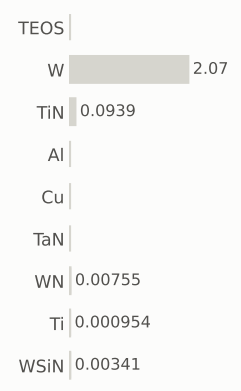

gases emitted (g)

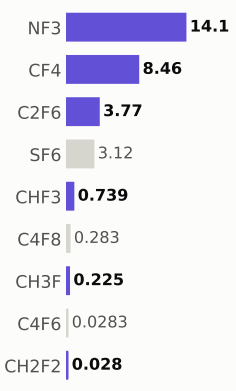

Step #13000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,348.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

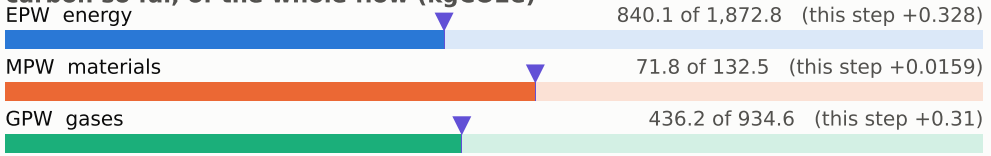

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

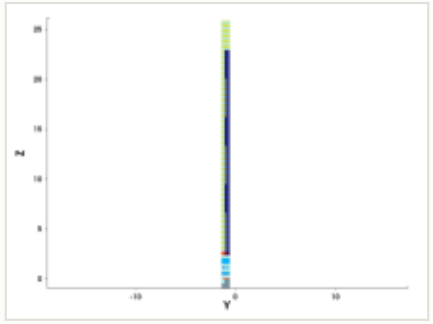

y cut at -1.035 µm

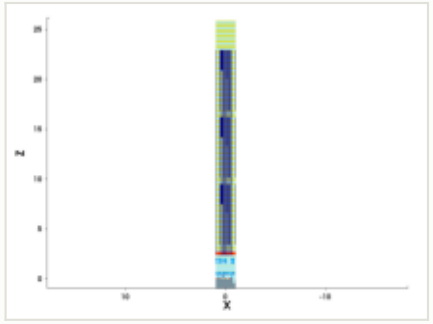

mask for this step

no mask for this step

steps by process area

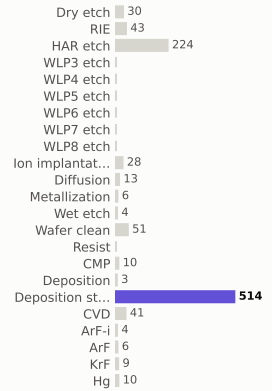

materials deposited (g)

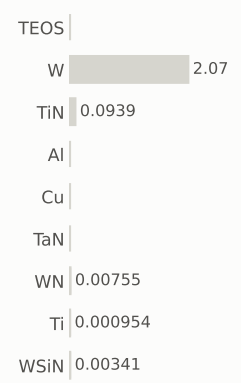

gases emitted (g)

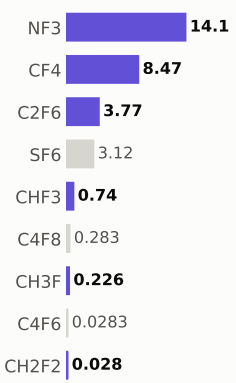

Step #13010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,348.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

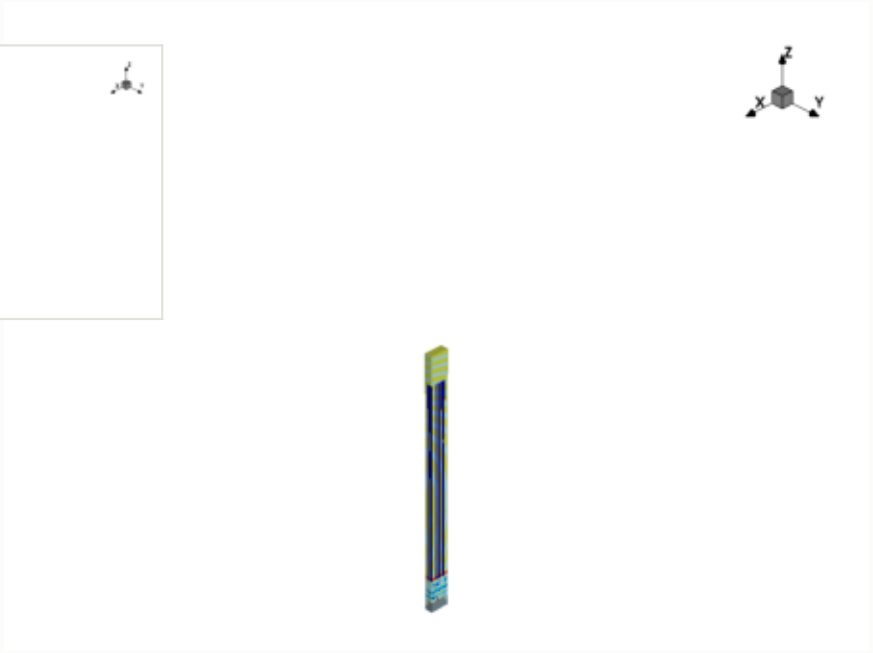

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

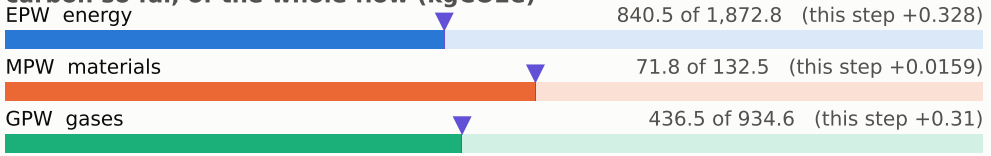

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

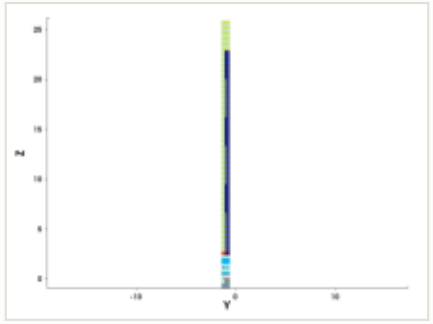

y cut at -1.035 µm

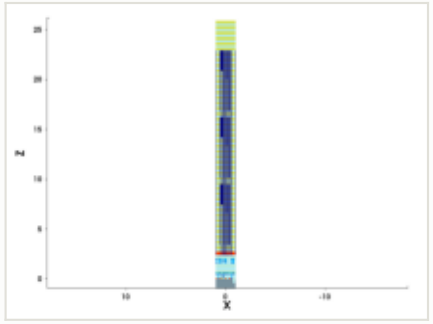

mask for this step

no mask for this step

steps by process area

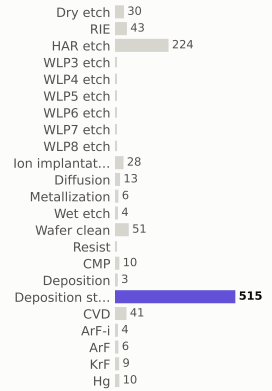

materials deposited (g)

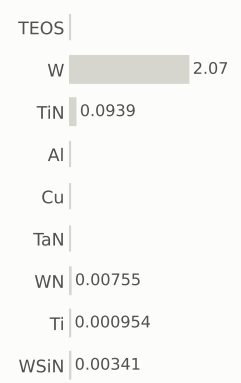

gases emitted (g)

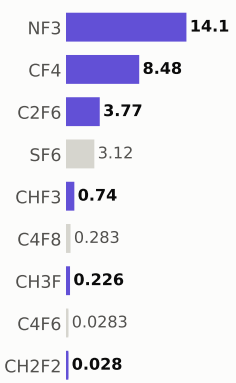

Step #13020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,349.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

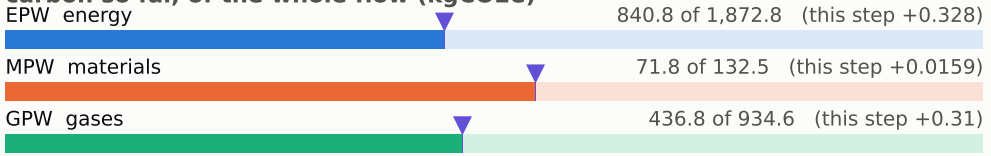

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

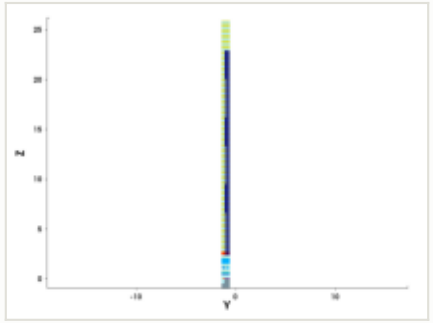

y cut at -1.035 µm

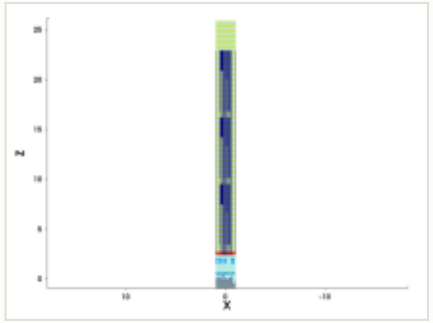

mask for this step

no mask for this step

steps by process area

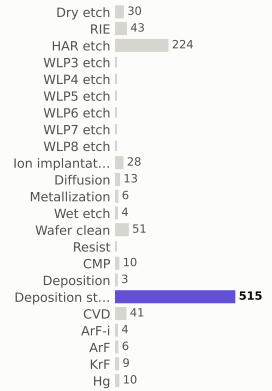

materials deposited (g)

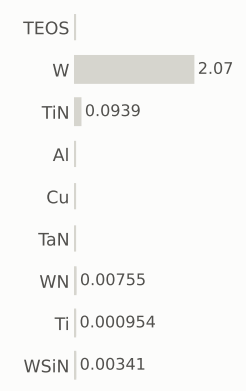

gases emitted (g)

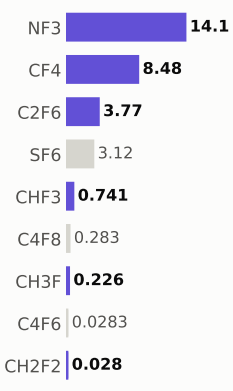

Step #13030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,350.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

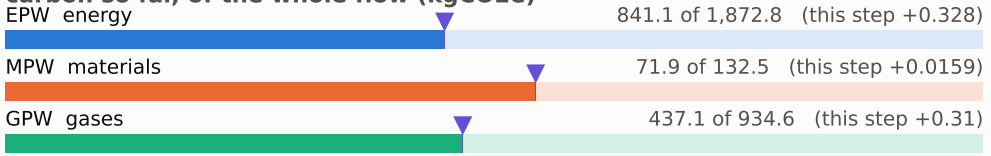

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

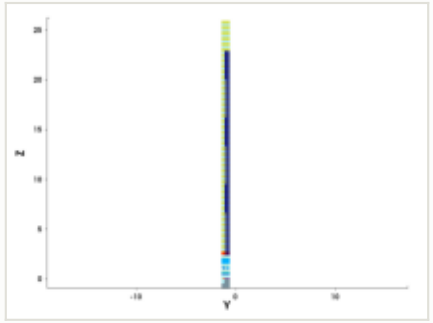

y cut at -1.035 µm

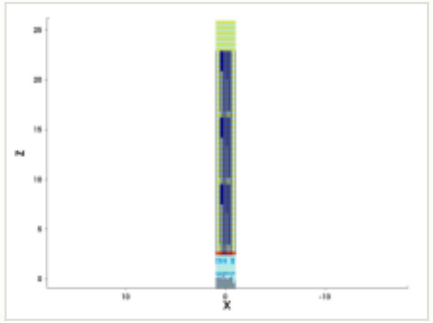

mask for this step

no mask for this step

steps by process area

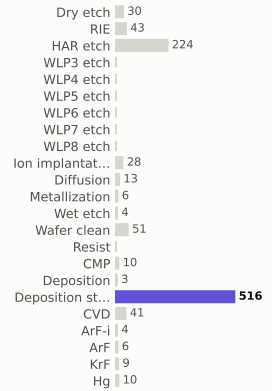

materials deposited (g)

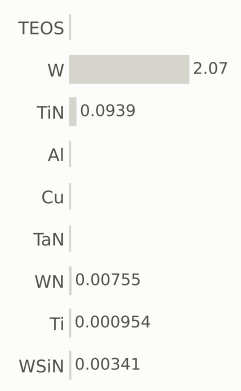

gases emitted (g)

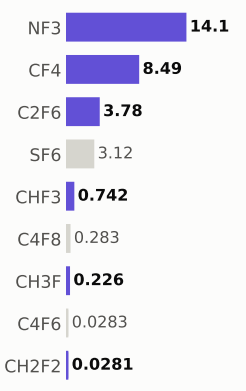

Step #13040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,350.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

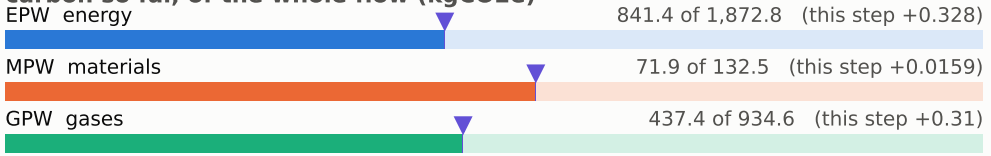

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

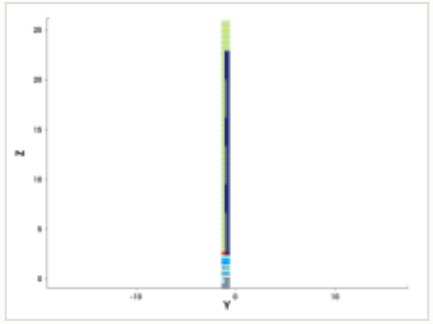

y cut at -1.035 µm

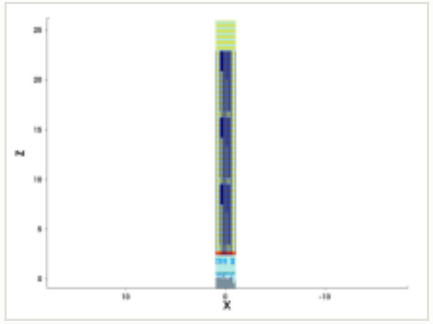

mask for this step

no mask for this step

steps by process area

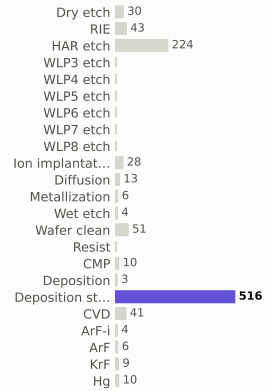

materials deposited (g)

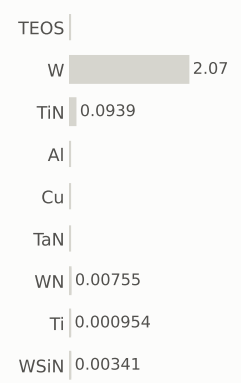

gases emitted (g)

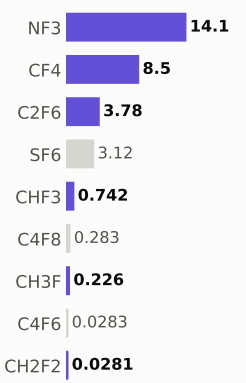

Step #13050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,351.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

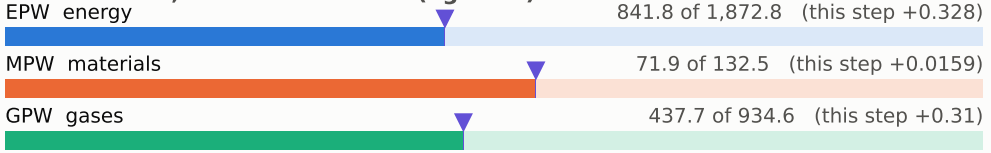

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

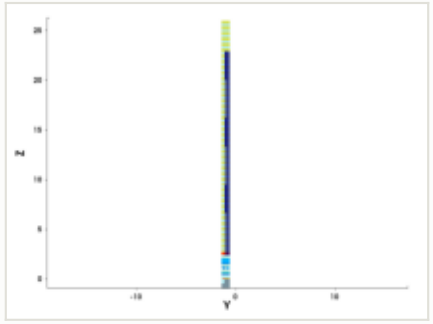

y cut at -1.035 µm

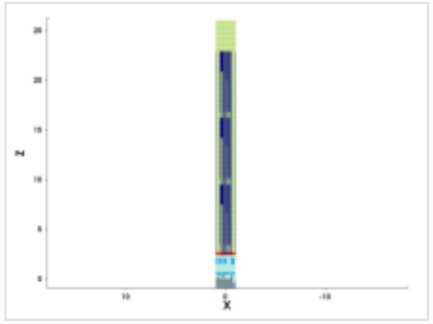

mask for this step

no mask for this step

steps by process area

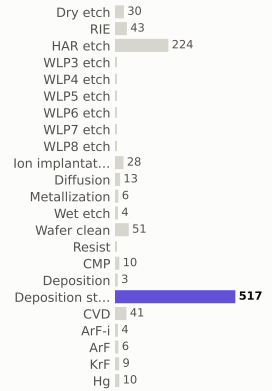

materials deposited (g)

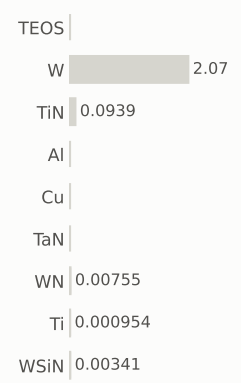

gases emitted (g)

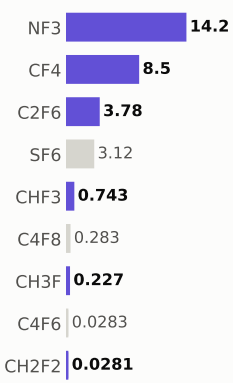

Step #13060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,352.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

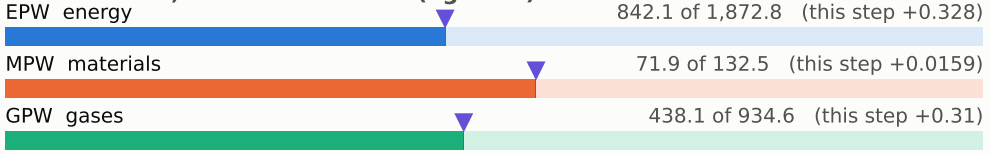

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

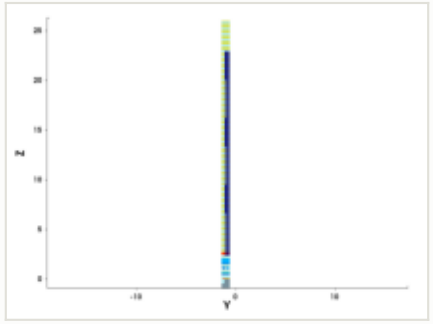

y cut at -1.035 µm

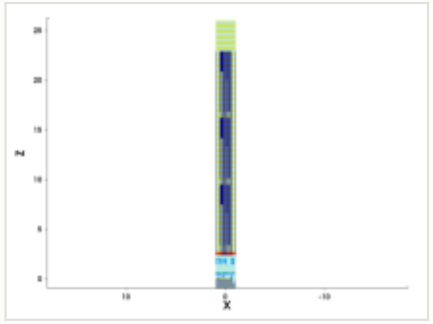

mask for this step

no mask for this step

steps by process area

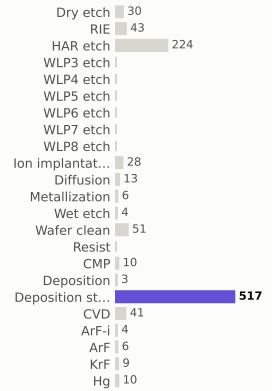

materials deposited (g)

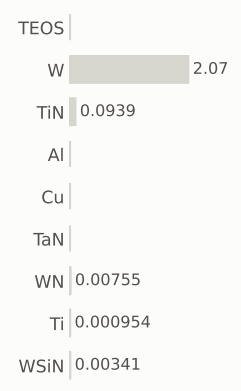

gases emitted (g)

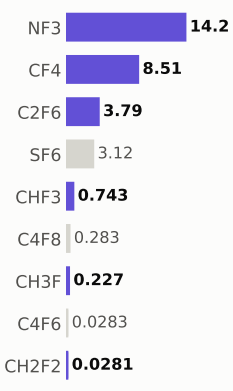

Step #13070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,352.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

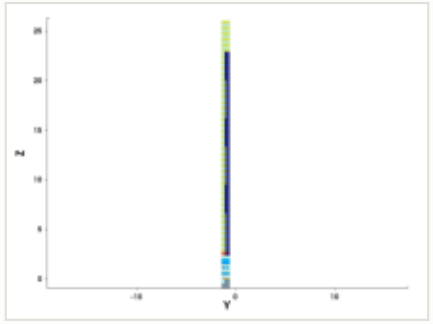

y cut at -1.035 µm

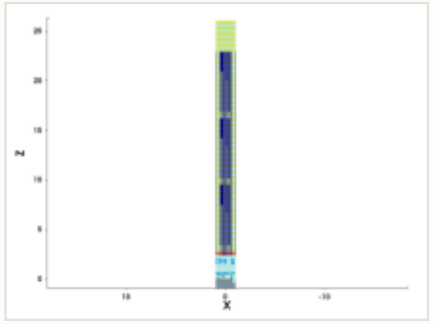

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 842.4 of 1,872.8 (this step +0.328)

MPW materials — 71.9 of 132.5 (this step +0.0159)

GPW gases — 438.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

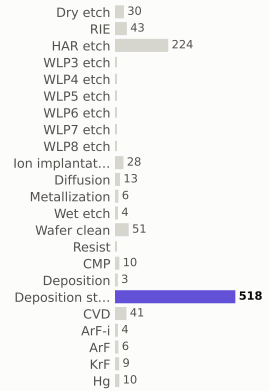

materials deposited (g)

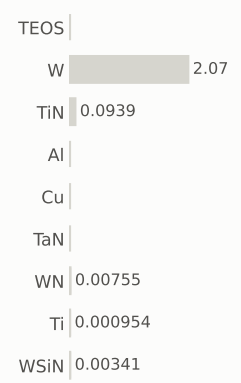

gases emitted (g)

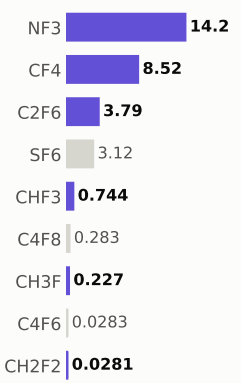

Step #13080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,353.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

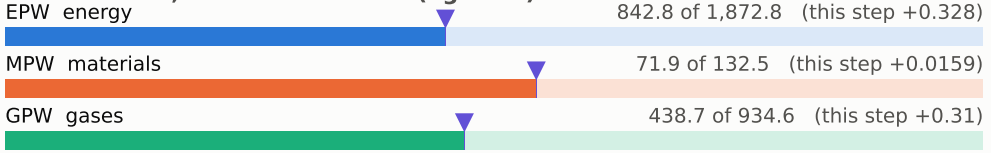

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

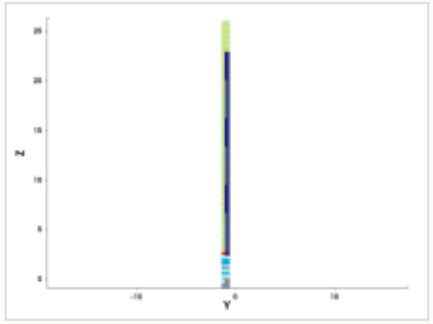

y cut at -1.035 µm

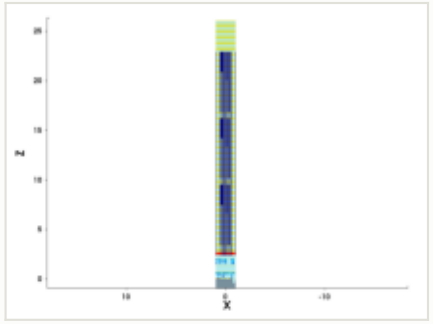

mask for this step

no mask for this step

steps by process area

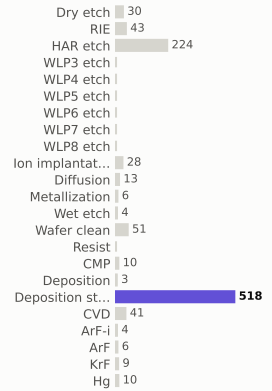

materials deposited (g)

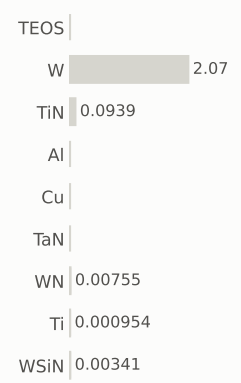

gases emitted (g)

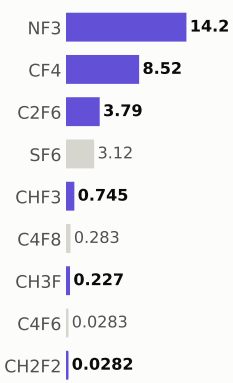

Step #13090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,354.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

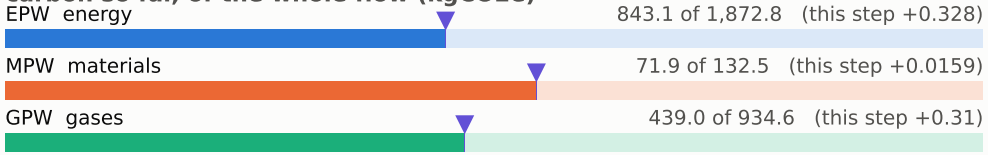

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

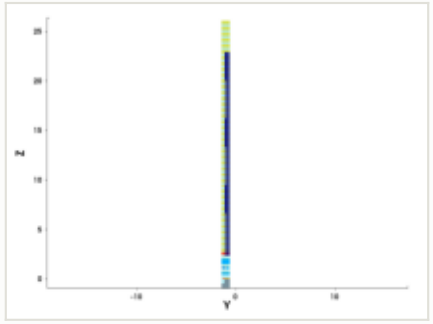

y cut at -1.035 µm

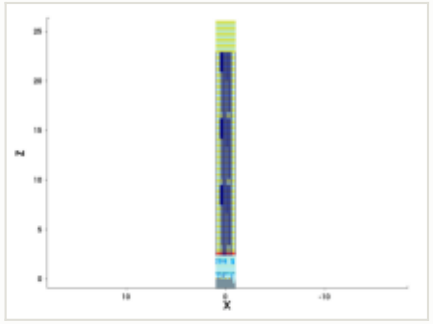

mask for this step

no mask for this step

steps by process area

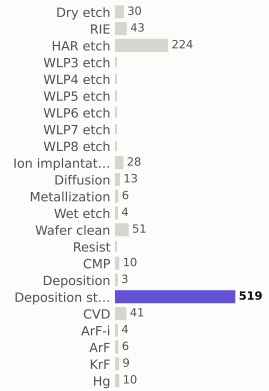

materials deposited (g)

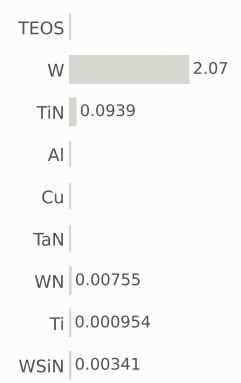

gases emitted (g)

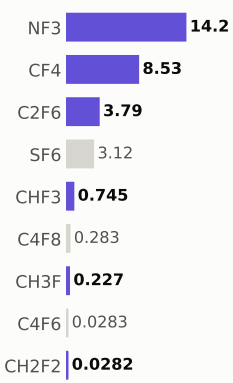

Step #13100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,354.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

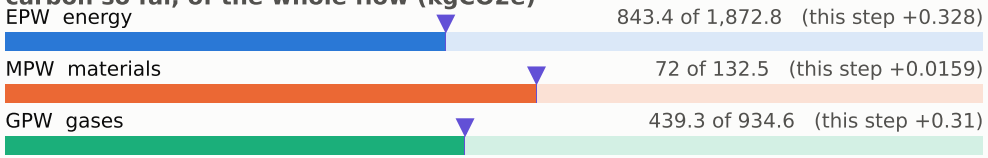

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

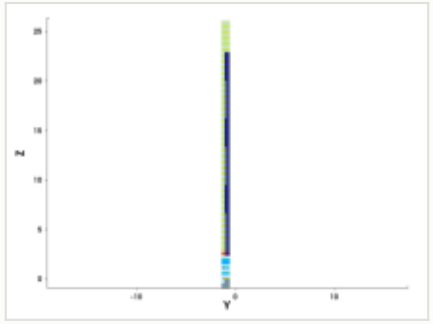

y cut at -1.035 µm

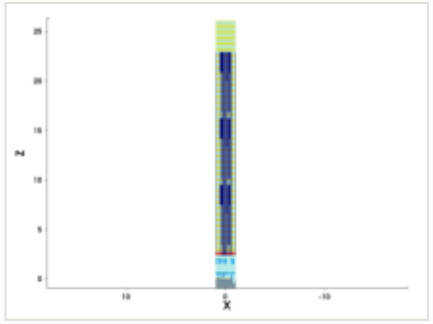

mask for this step

no mask for this step

steps by process area

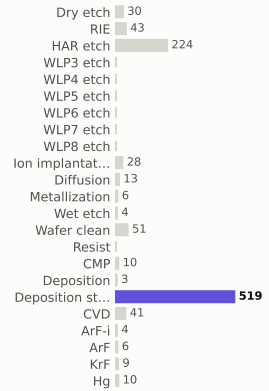

materials deposited (g)

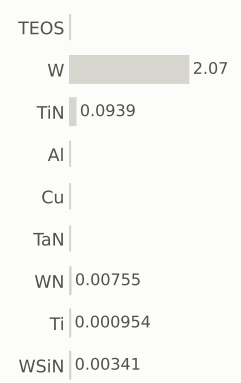

gases emitted (g)

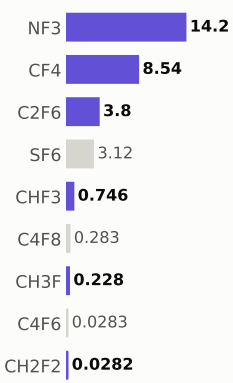

Step #13110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,355.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

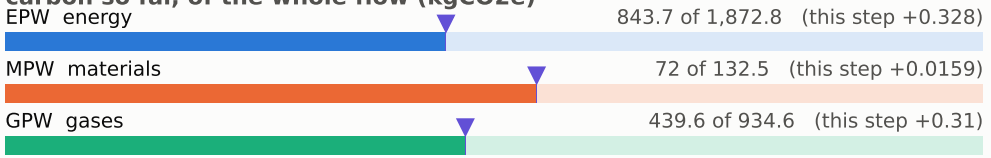

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

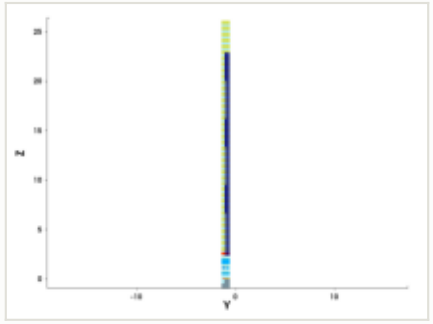

y cut at -1.035 µm

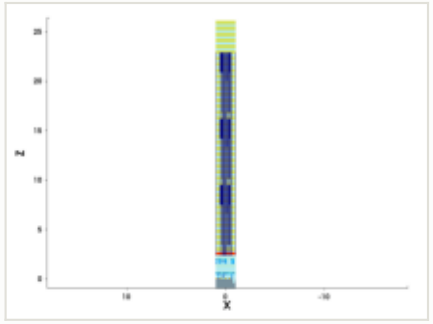

mask for this step

no mask for this step

steps by process area

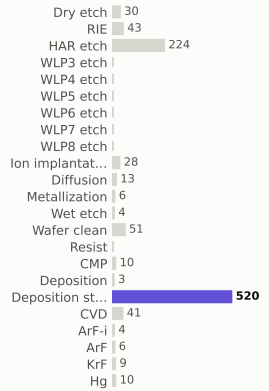

materials deposited (g)

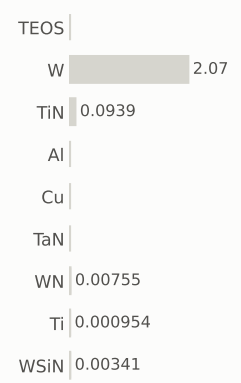

gases emitted (g)

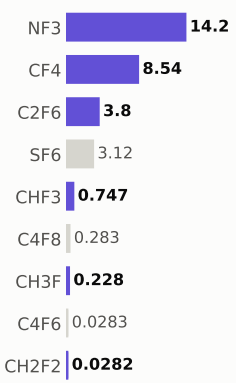

Step #13120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,356.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

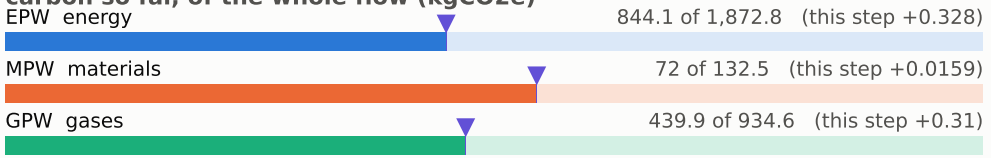

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

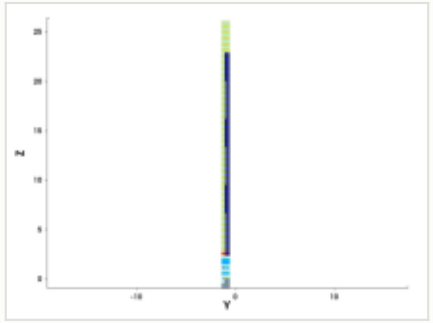

y cut at -1.035 µm

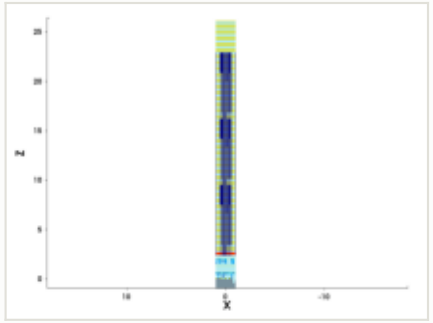

mask for this step

no mask for this step

steps by process area

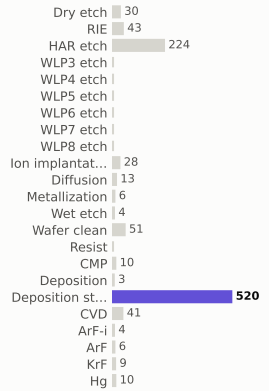

materials deposited (g)

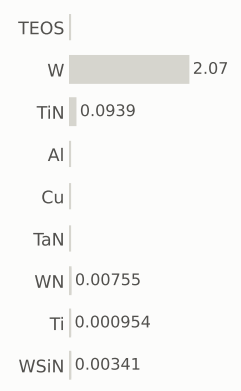

gases emitted (g)

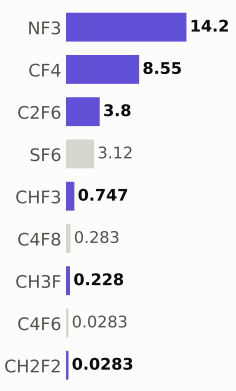

Step #13130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,356.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

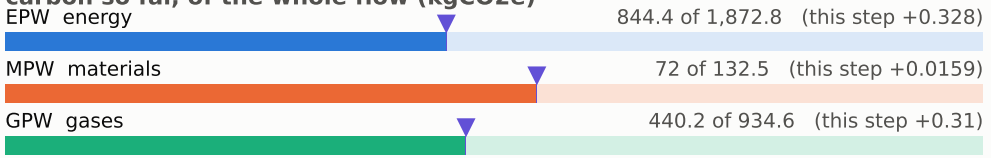

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

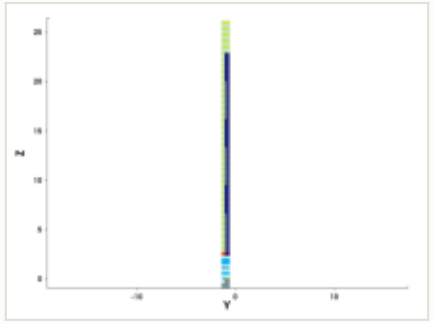

y cut at -1.035 µm

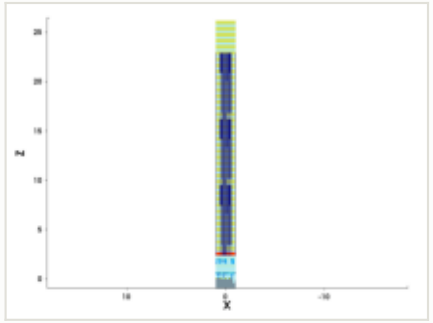

mask for this step

no mask for this step

steps by process area

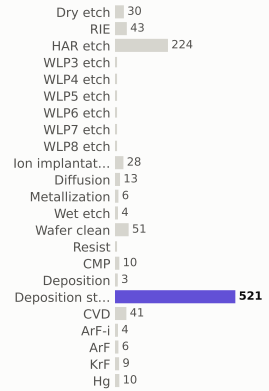

materials deposited (g)

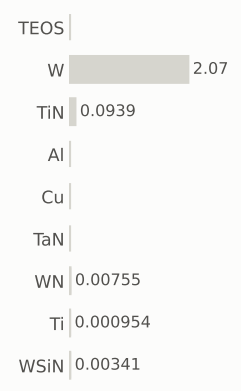

gases emitted (g)

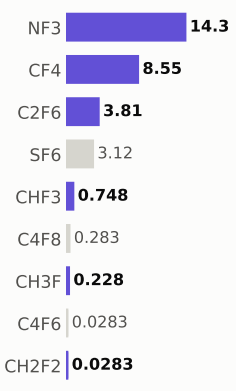

Step #13140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,357.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

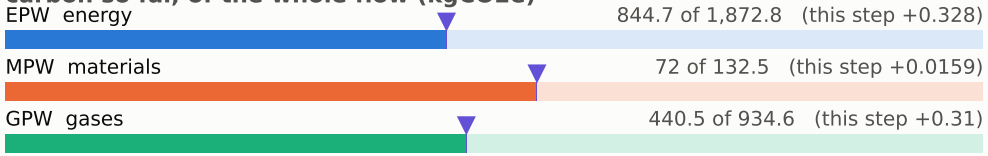

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

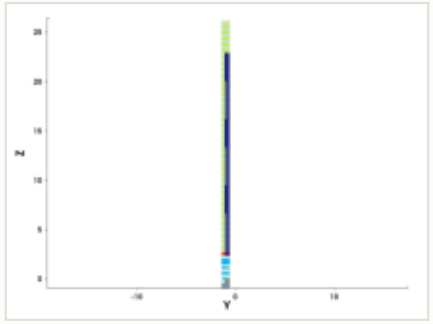

y cut at -1.035 µm

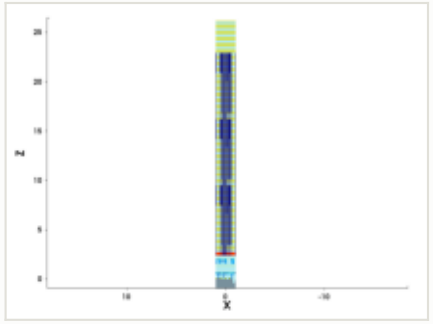

mask for this step

no mask for this step

steps by process area

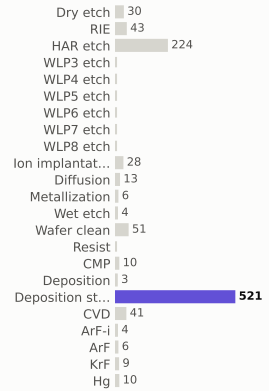

materials deposited (g)

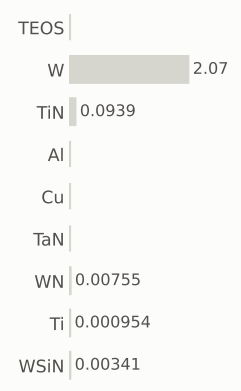

gases emitted (g)

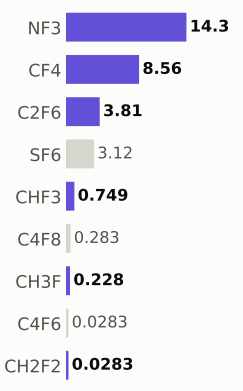

Step #13150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,357.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

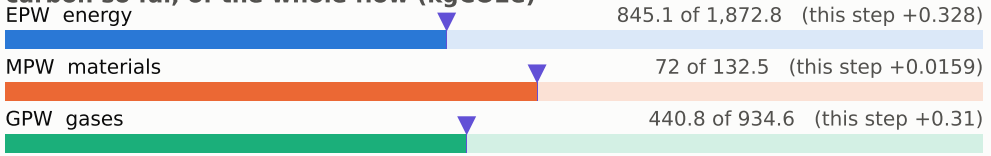

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

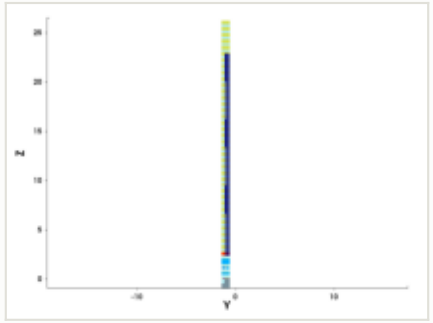

y cut at -1.035 µm

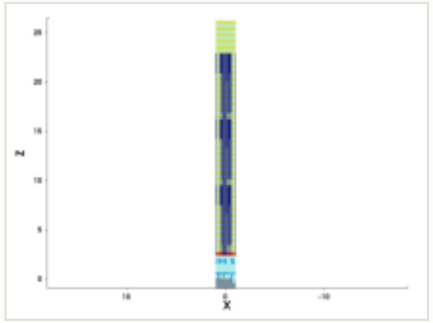

mask for this step

no mask for this step

steps by process area

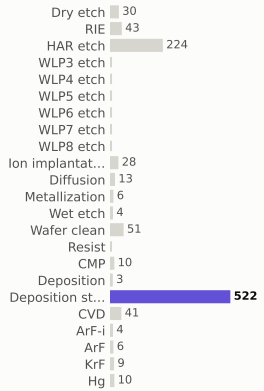

materials deposited (g)

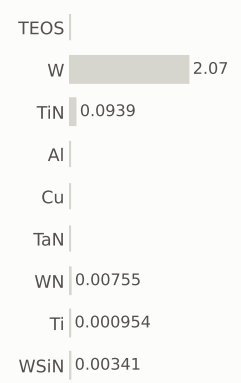

gases emitted (g)

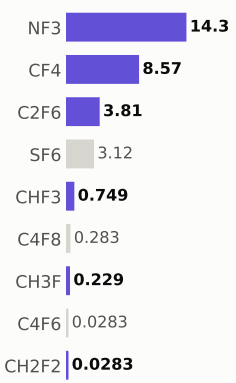

Step #13160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,358.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

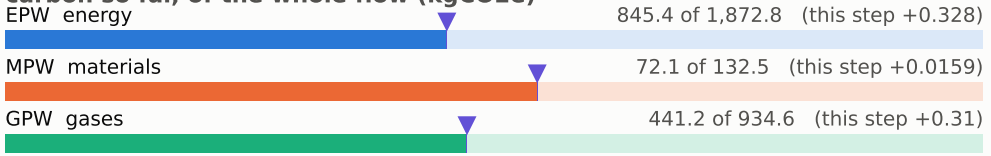

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

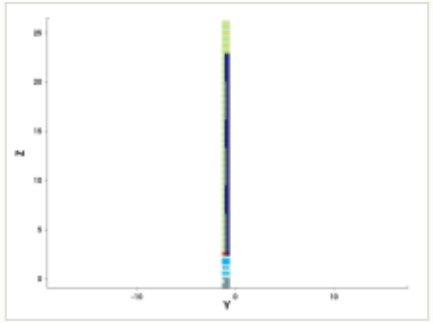

y cut at -1.035 µm

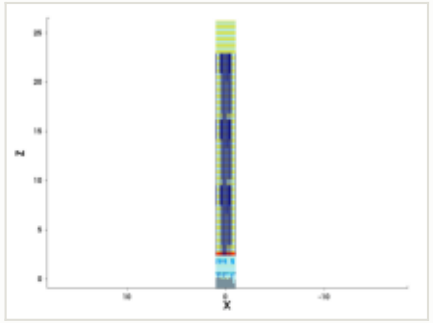

mask for this step

no mask for this step

steps by process area

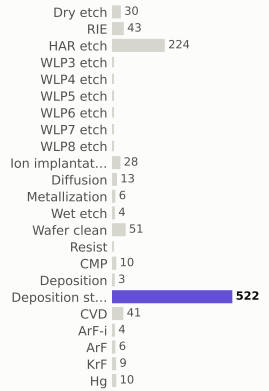

materials deposited (g)

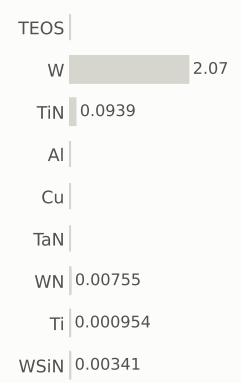

gases emitted (g)

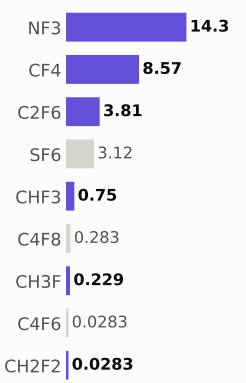

Step #13170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,359.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

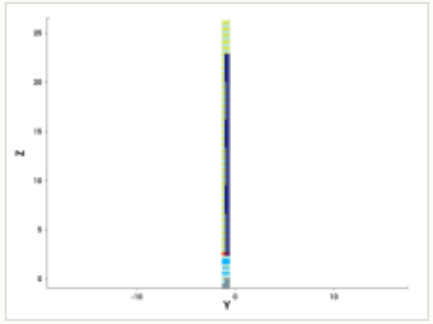

y cut at -1.035 µm

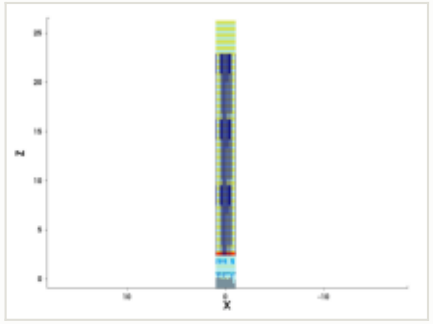

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

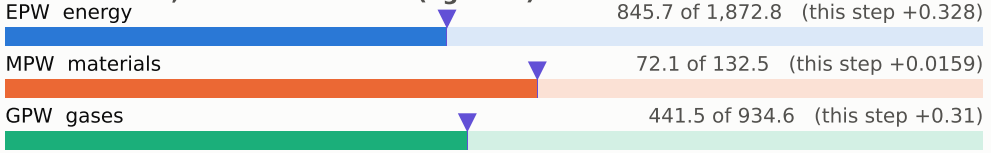

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

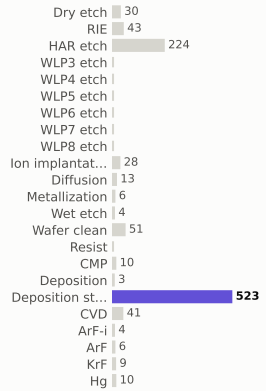

materials deposited (g)

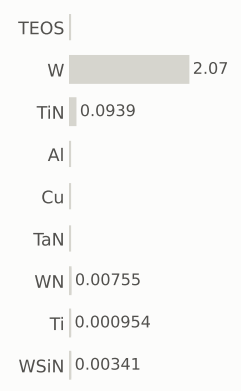

gases emitted (g)

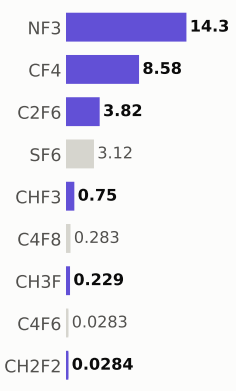

Step #13180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,359.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

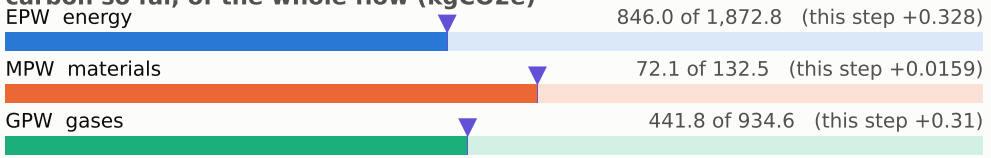

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

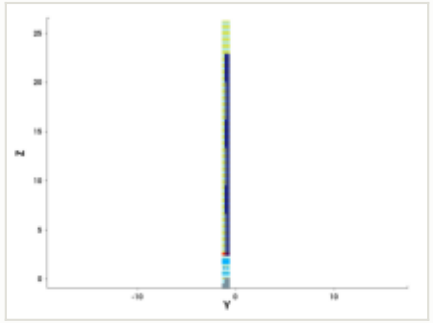

y cut at -1.035 µm

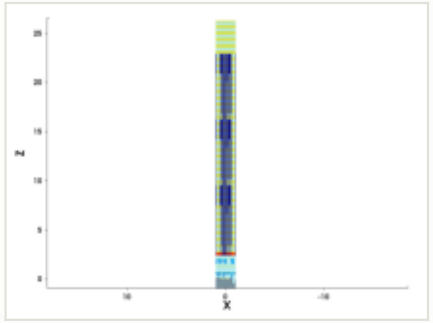

mask for this step

no mask for this step

steps by process area

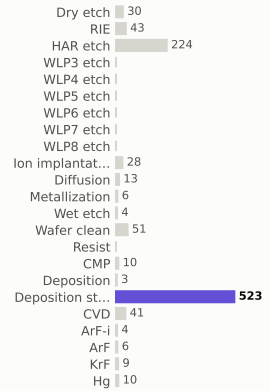

materials deposited (g)

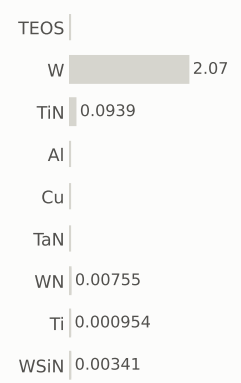

gases emitted (g)

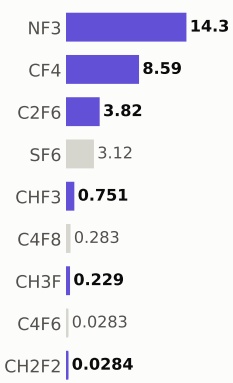

Step #13190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,360.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

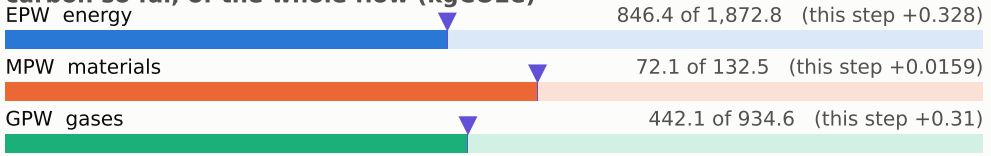

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

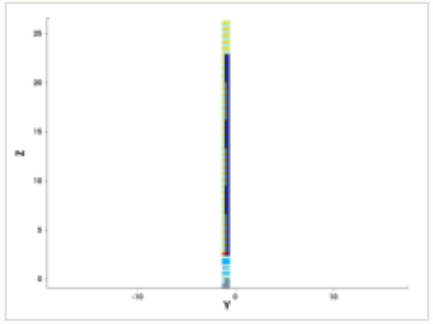

y cut at -1.035 µm

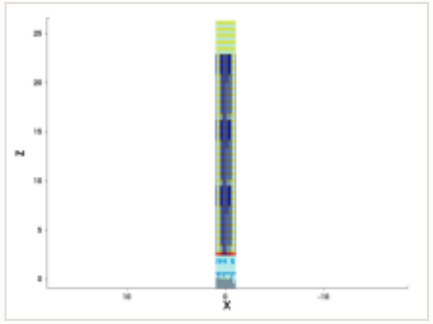

mask for this step

no mask for this step

steps by process area

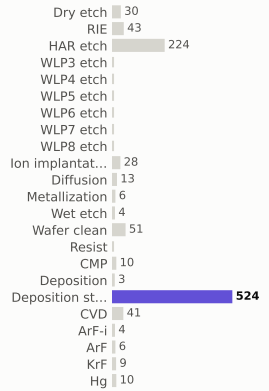

materials deposited (g)

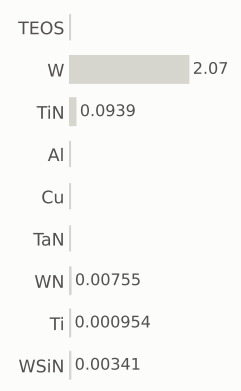

gases emitted (g)

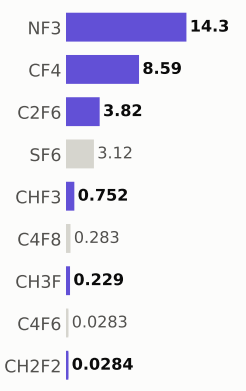

Step #13200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,361.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

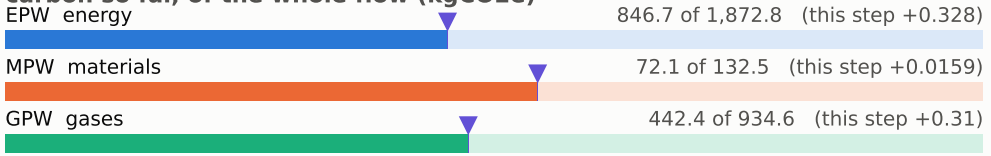

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

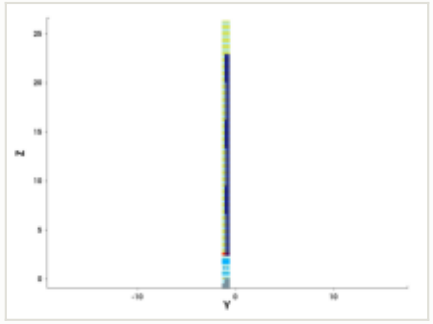

y cut at -1.035 µm

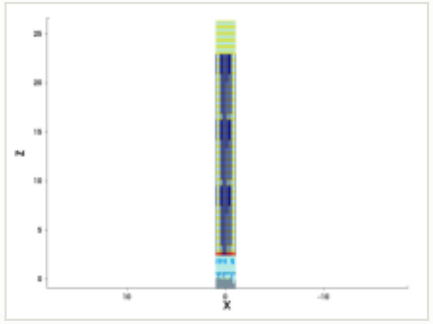

mask for this step

no mask for this step

steps by process area

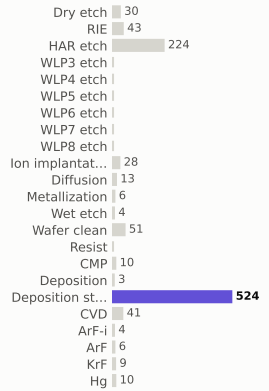

materials deposited (g)

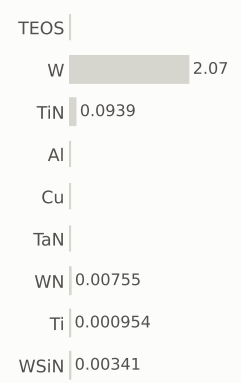

gases emitted (g)

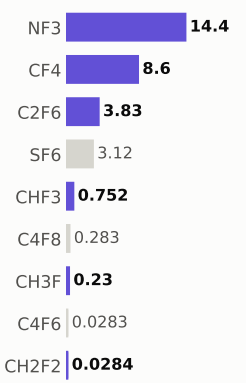

Step #13210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,361.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

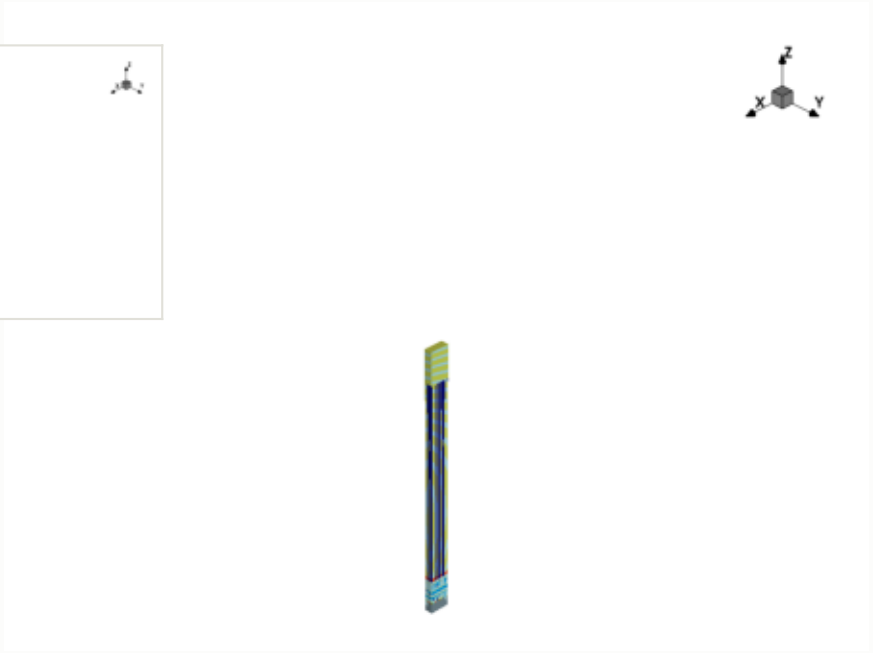

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

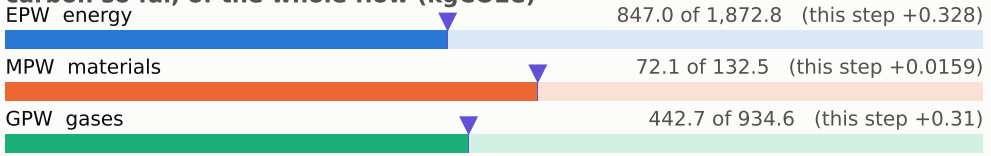

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

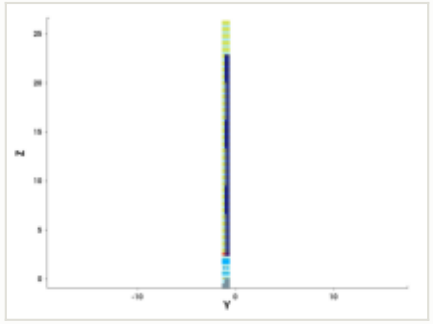

y cut at -1.035 µm

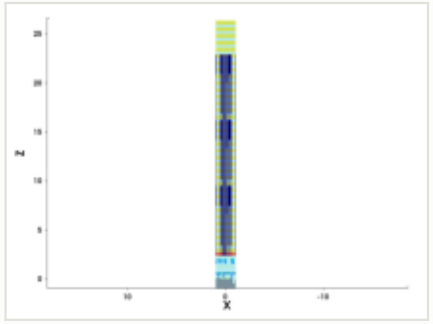

mask for this step

no mask for this step

steps by process area

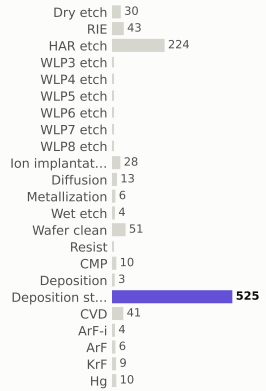

materials deposited (g)

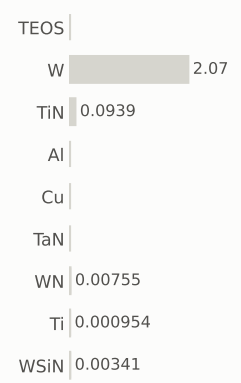

gases emitted (g)

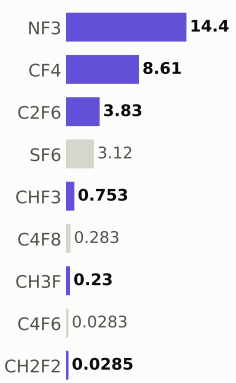

Step #13220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,362.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

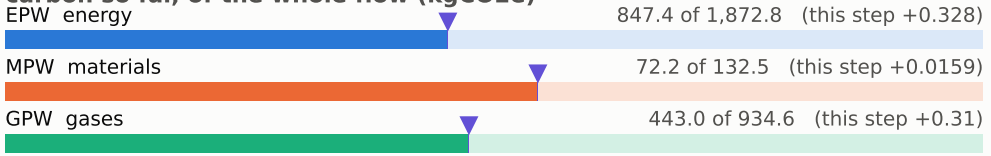

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

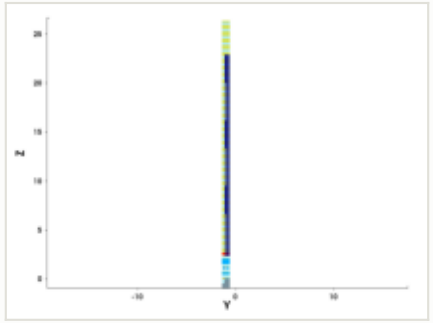

y cut at -1.035 µm

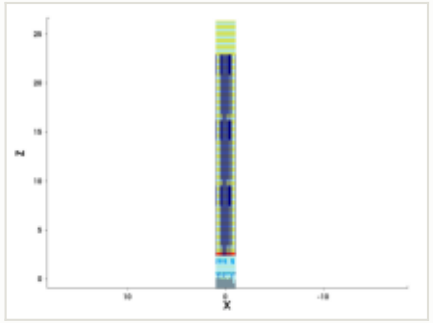

mask for this step

no mask for this step

steps by process area

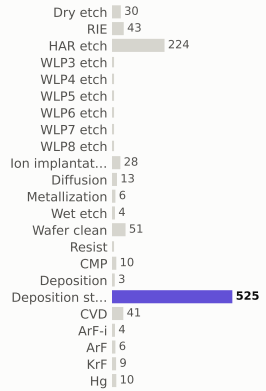

materials deposited (g)

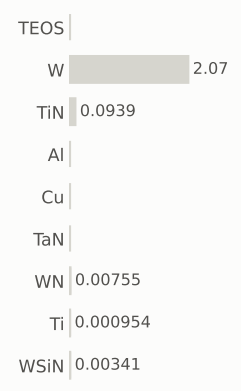

gases emitted (g)

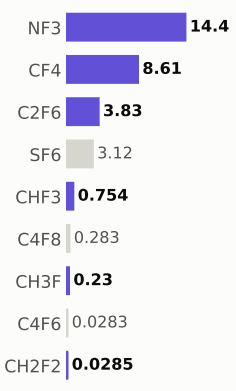

Step #13230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,363.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

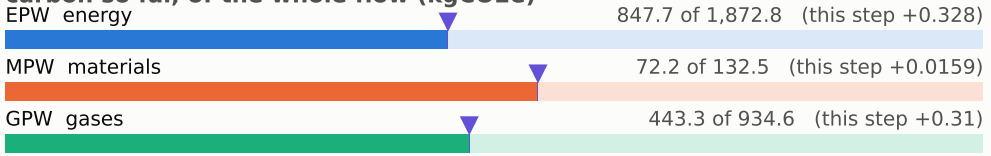

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

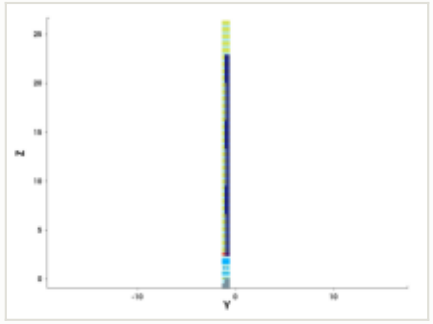

y cut at -1.035 µm

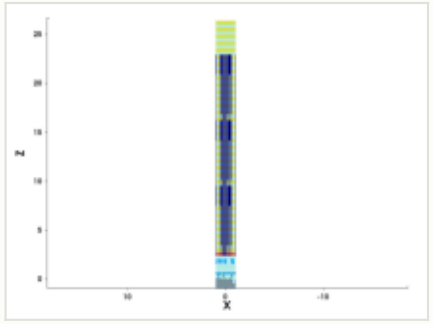

mask for this step

no mask for this step

steps by process area

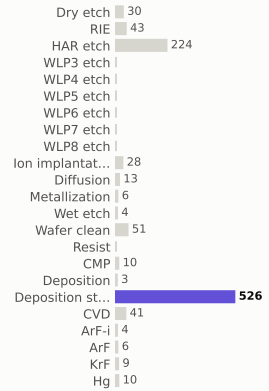

materials deposited (g)

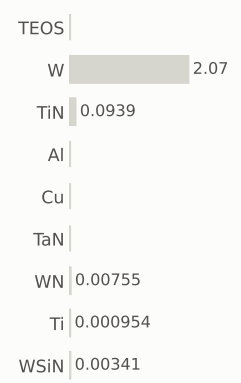

gases emitted (g)

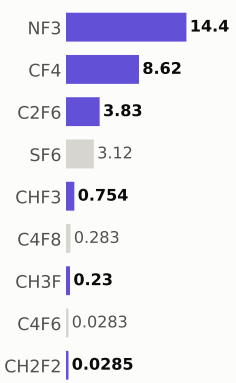

Step #13240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,363.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

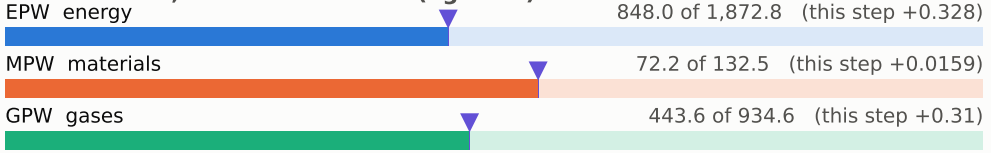

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

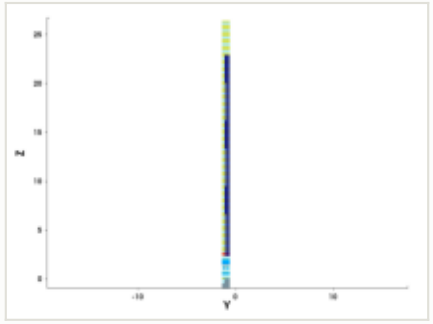

y cut at -1.035 µm

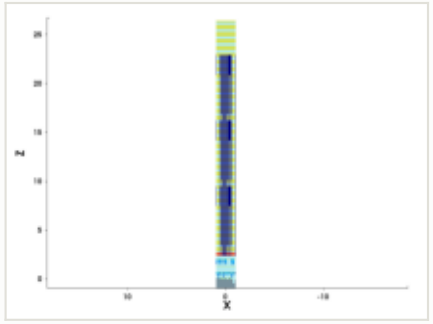

mask for this step

no mask for this step

steps by process area

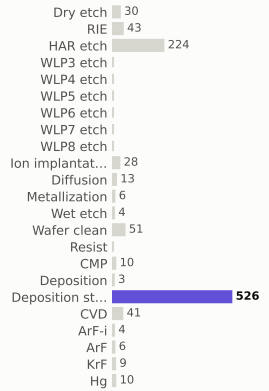

materials deposited (g)

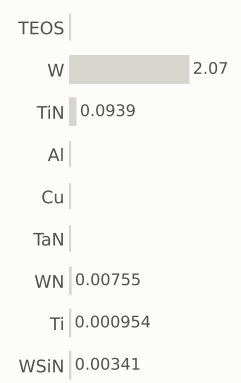

gases emitted (g)

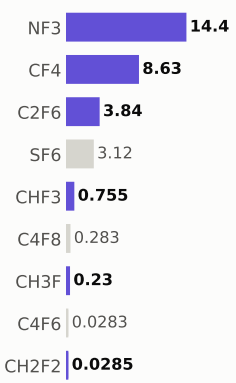

Step #13250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,364.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

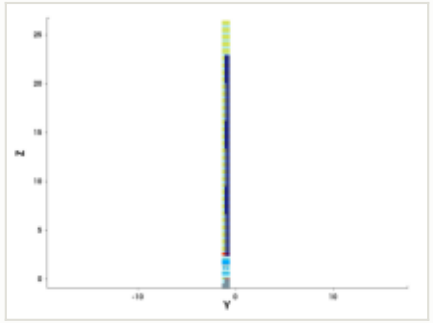

y cut at -1.035 µm

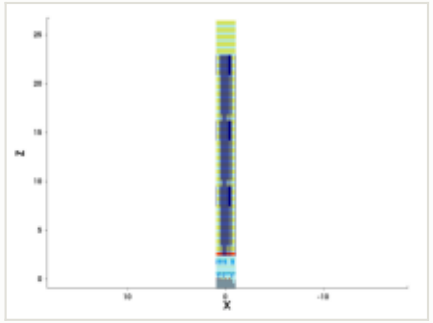

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 848.3 of 1,872.8 (this step +0.328)

MPW materials — 72.2 of 132.5 (this step +0.0159)

GPW gases — 443.9 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

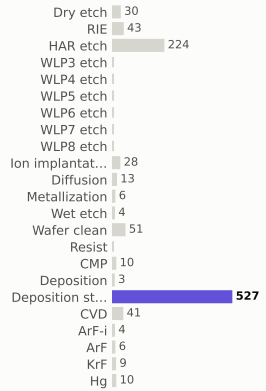

materials deposited (g)

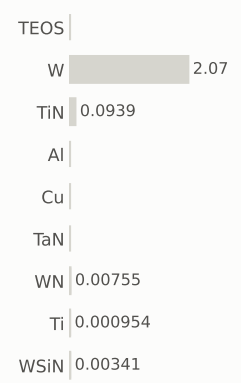

gases emitted (g)

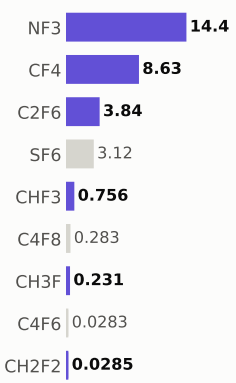

Step #13260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,365.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

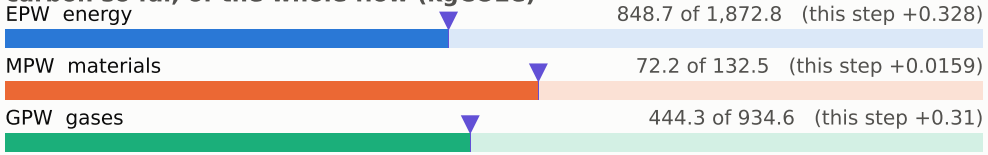

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

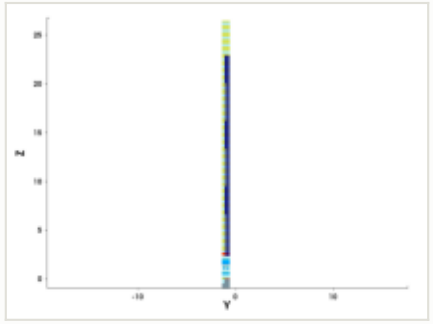

y cut at -1.035 µm

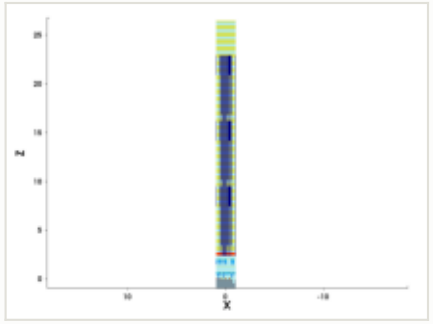

mask for this step

no mask for this step

steps by process area

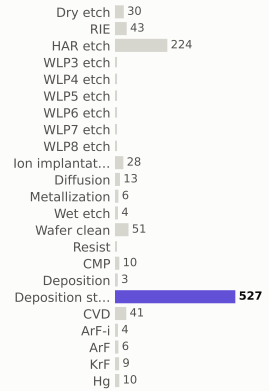

materials deposited (g)

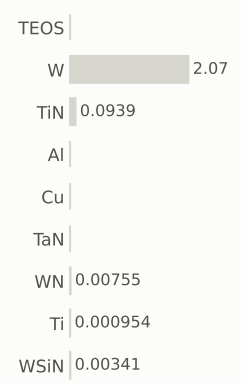

gases emitted (g)



Step #13270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,365.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

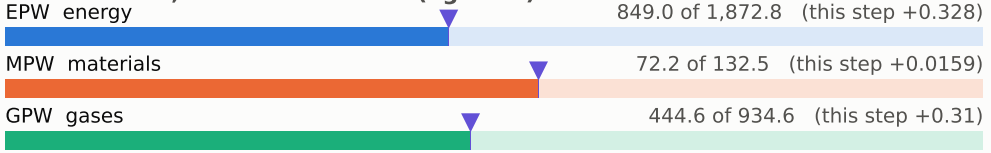

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

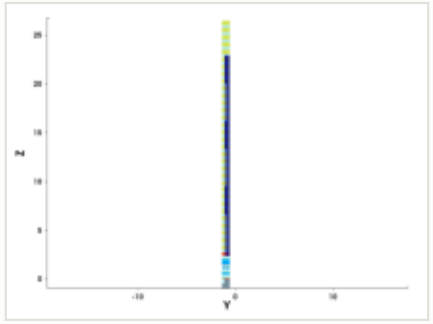

y cut at -1.035 µm

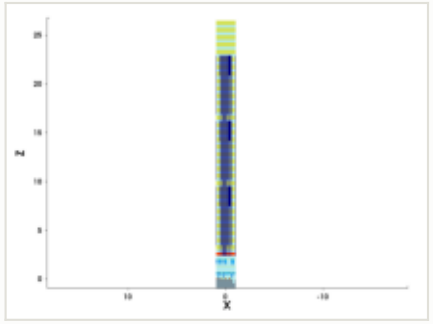

mask for this step

no mask for this step

steps by process area

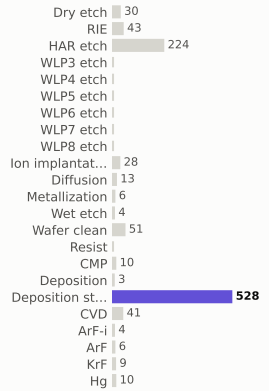

materials deposited (g)

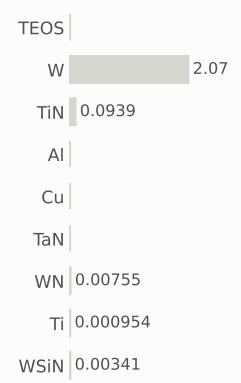

gases emitted (g)

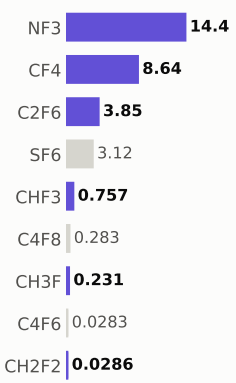

Step #13280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,366.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

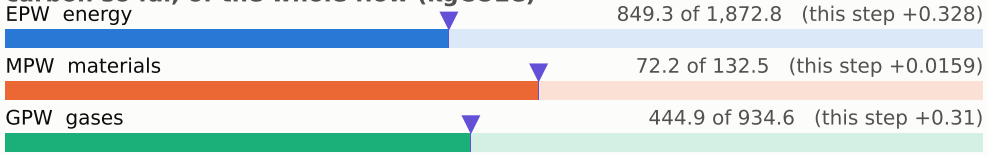

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

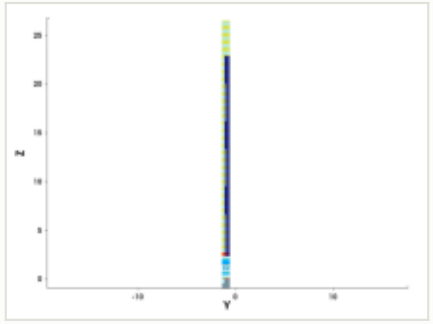

y cut at -1.035 µm

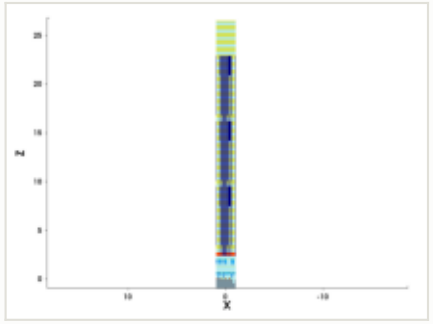

mask for this step

no mask for this step

steps by process area

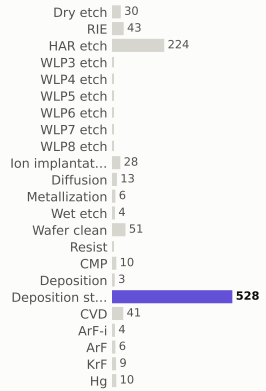

materials deposited (g)

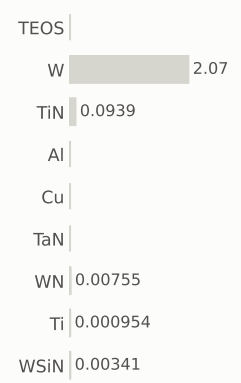

gases emitted (g)

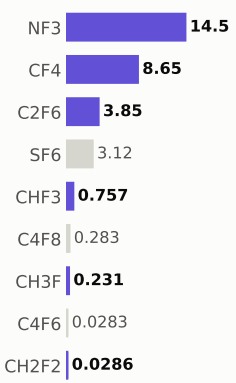

Step #13290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,367.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

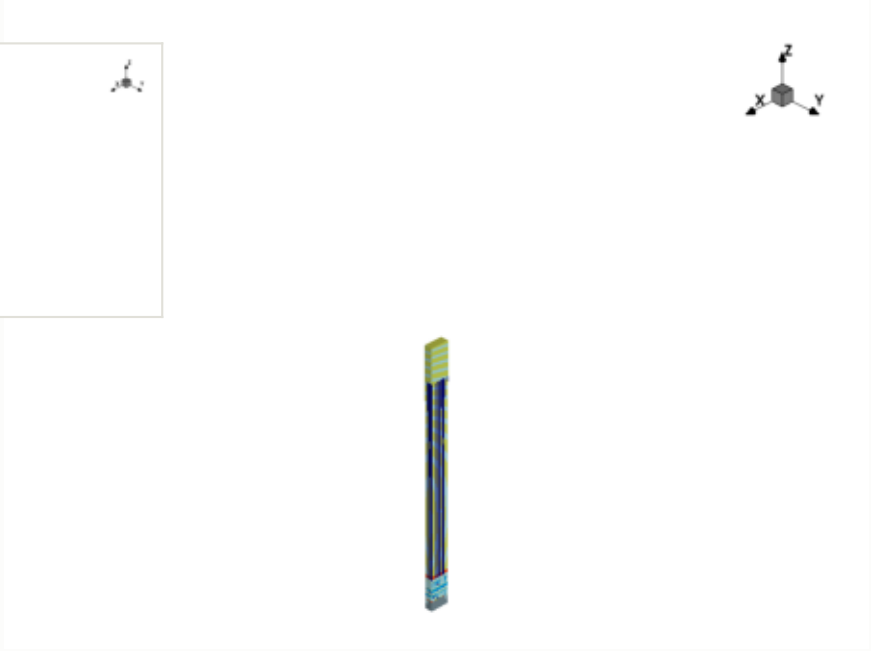

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

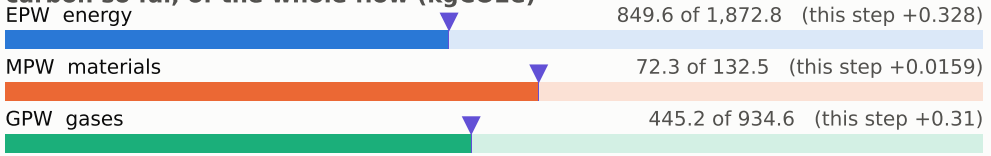

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

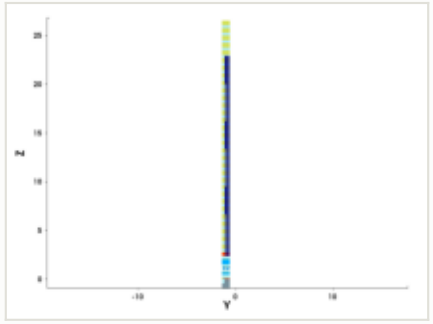

y cut at -1.035 µm

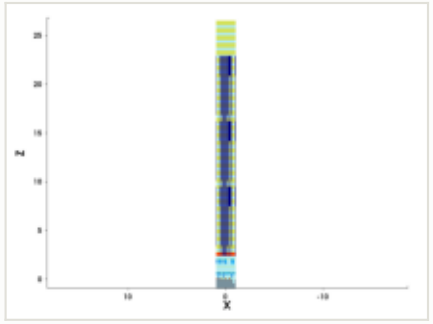

mask for this step

no mask for this step

steps by process area

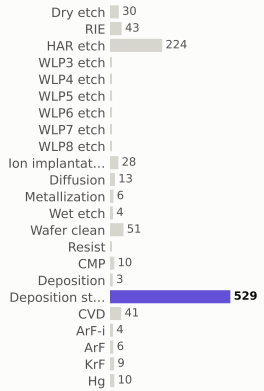

materials deposited (g)

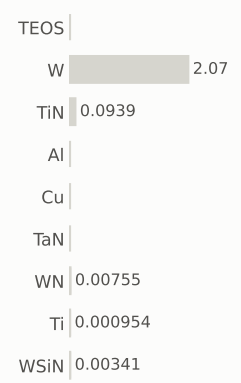

gases emitted (g)

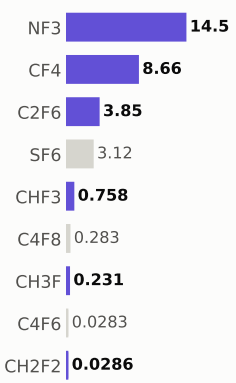

Step #13300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,367.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

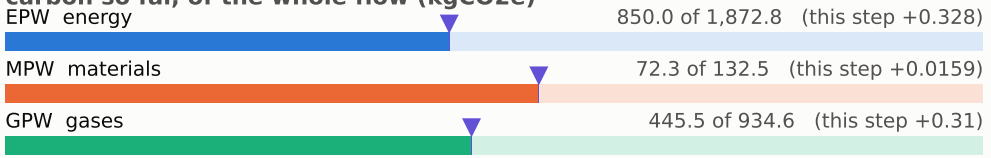

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

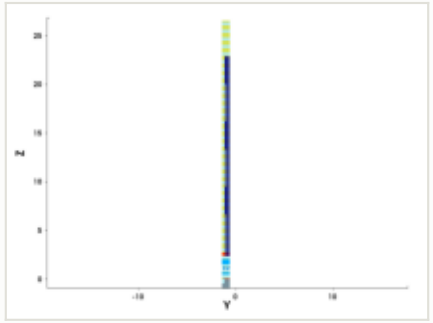

y cut at -1.035 µm

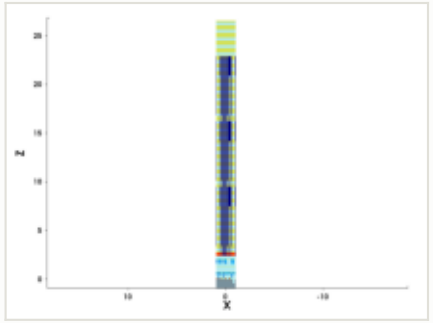

mask for this step

no mask for this step

steps by process area

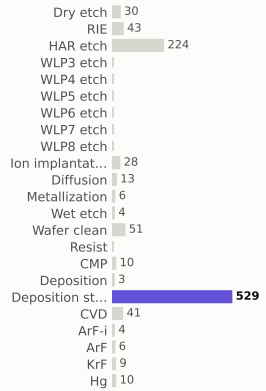

materials deposited (g)

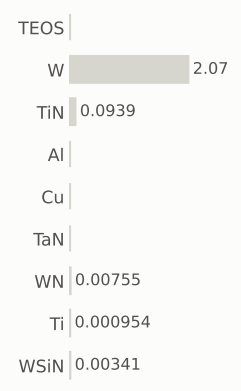

gases emitted (g)

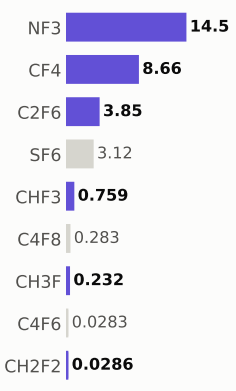

Step #13310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,368.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

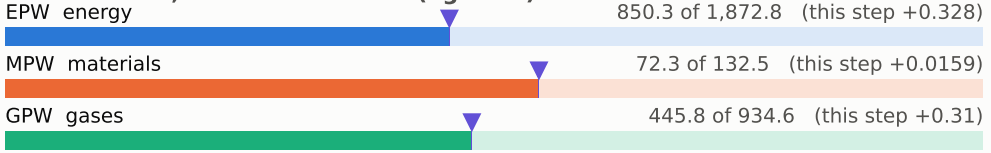

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

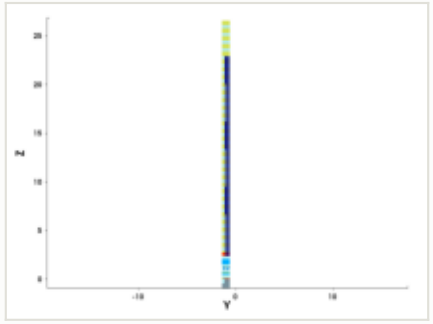

y cut at -1.035 µm

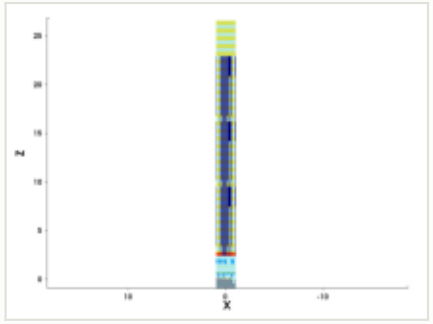

mask for this step

no mask for this step

steps by process area

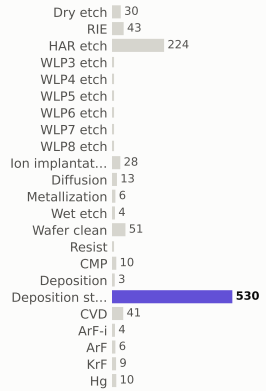

materials deposited (g)

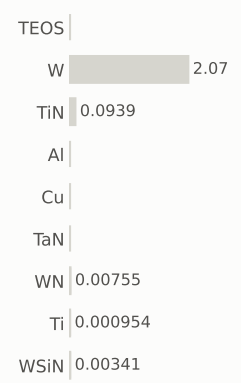

gases emitted (g)

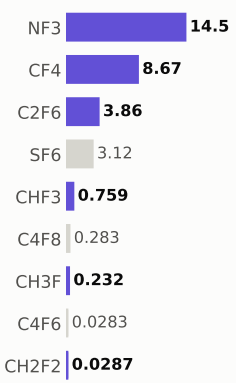

Step #13320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,369.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

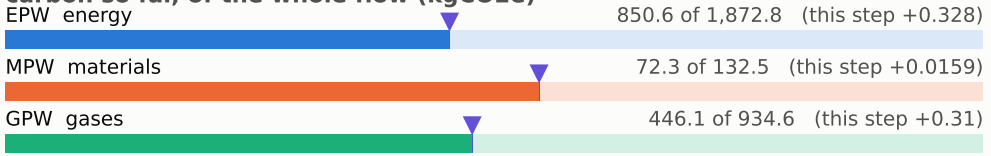

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

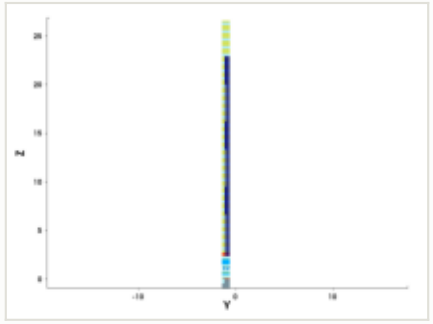

y cut at -1.035 µm

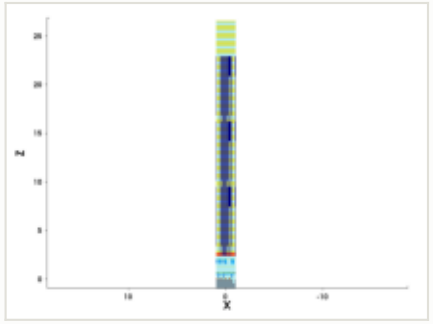

mask for this step

no mask for this step

steps by process area

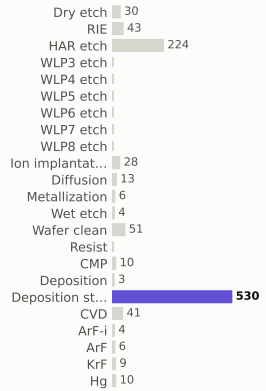

materials deposited (g)

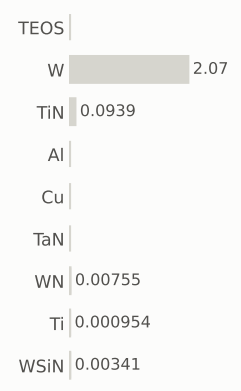

gases emitted (g)

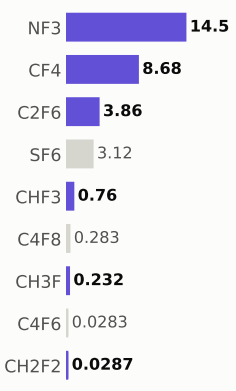

Step #13330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,369.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

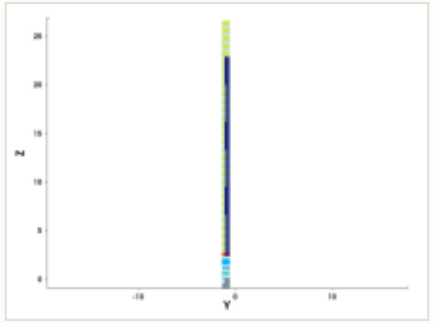

y cut at -1.035 µm

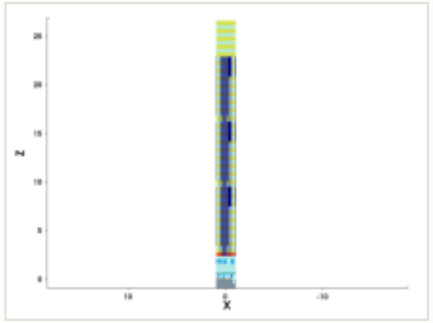

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

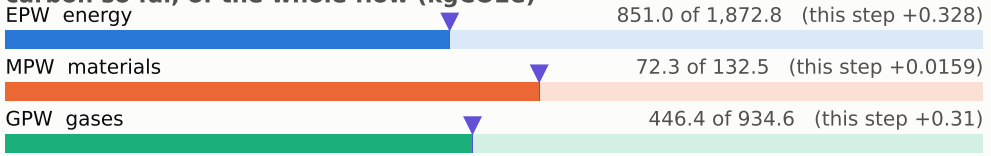

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

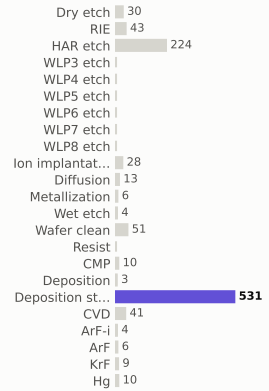

materials deposited (g)

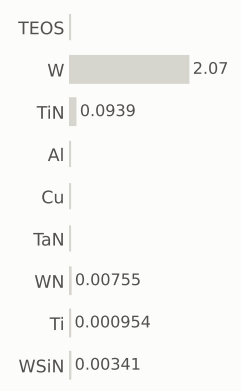

gases emitted (g)

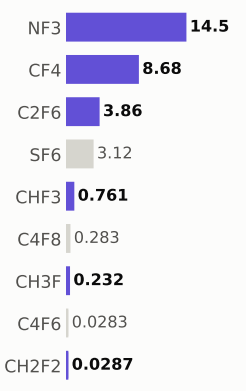

Step #13340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,370.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

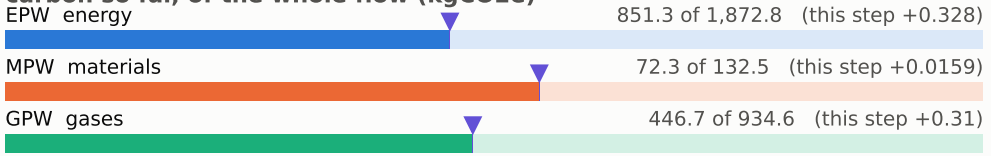

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

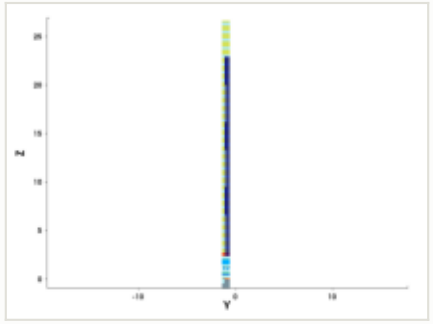

y cut at -1.035 µm

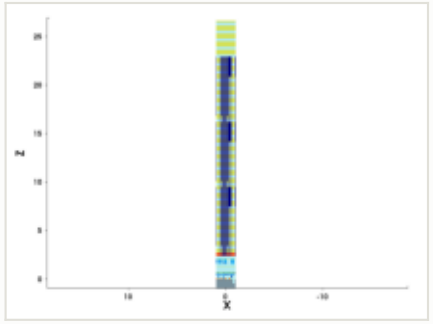

mask for this step

no mask for this step

steps by process area

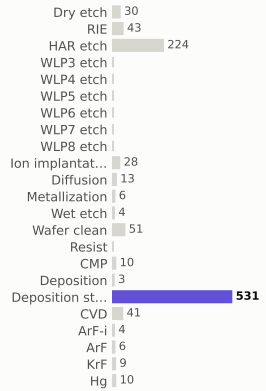

materials deposited (g)

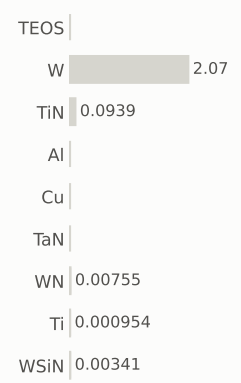

gases emitted (g)

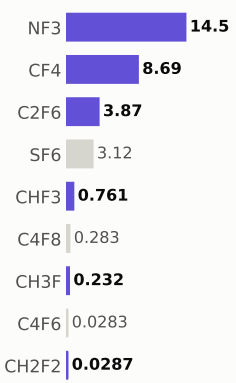

Step #13350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,371.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

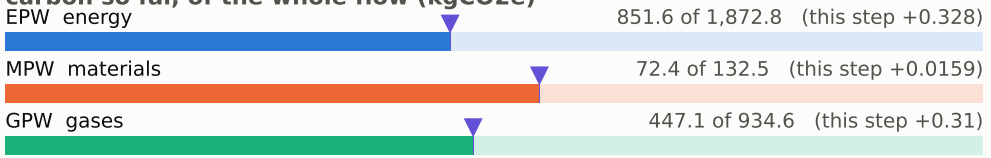

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

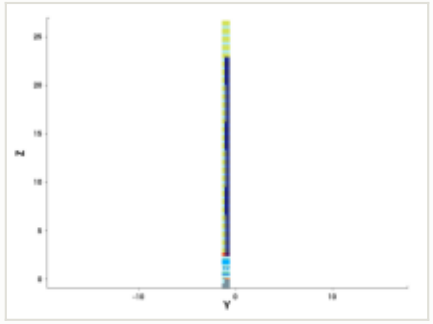

y cut at -1.035 µm

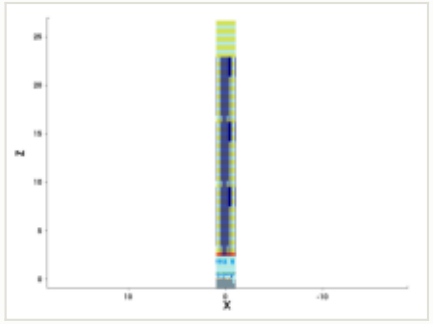

mask for this step

no mask for this step

steps by process area

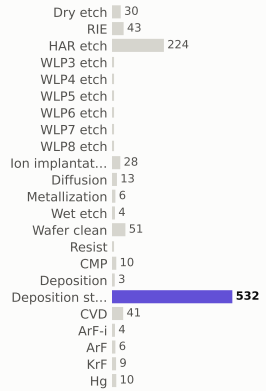

materials deposited (g)

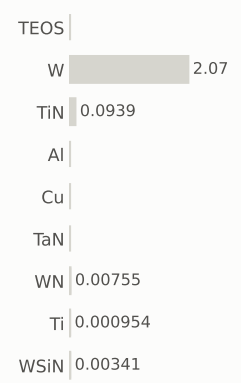

gases emitted (g)

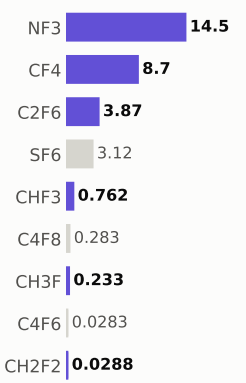

Step #13360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,371.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

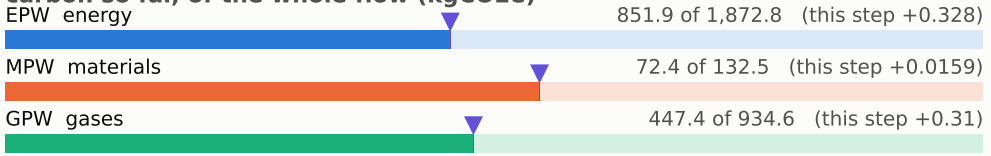

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

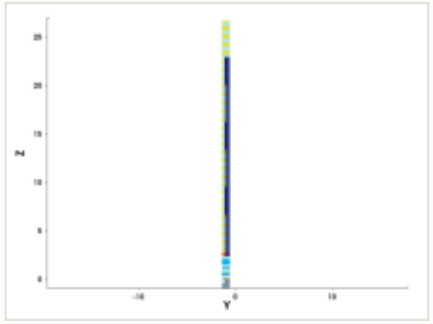

y cut at -1.035 µm

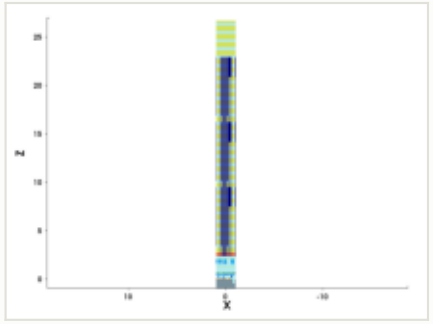

mask for this step

no mask for this step

steps by process area

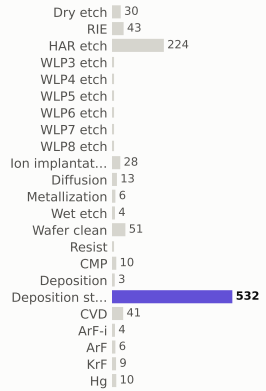

materials deposited (g)

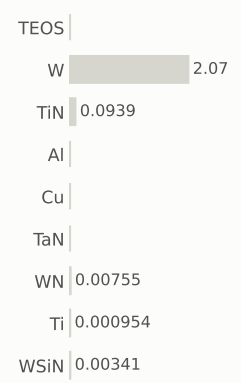

gases emitted (g)

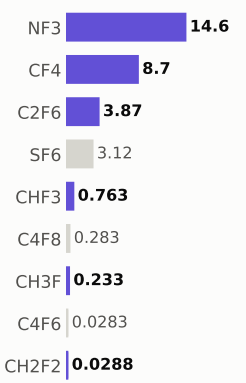

Step #13370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,372.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

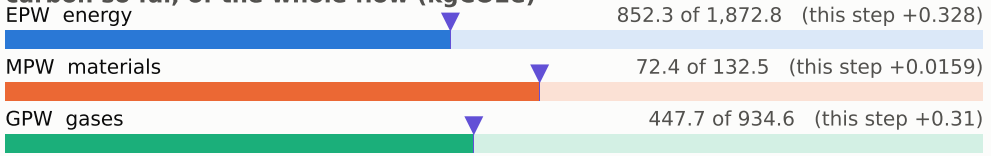

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

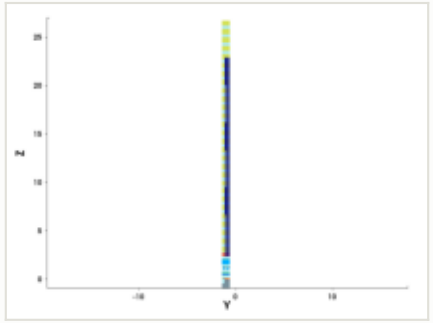

y cut at -1.035 µm

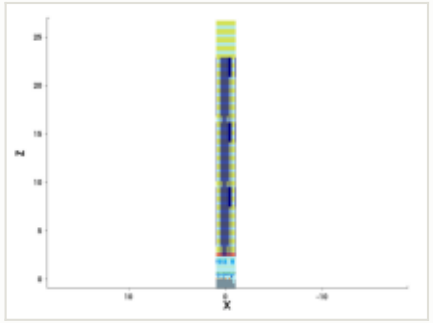

mask for this step

no mask for this step

steps by process area

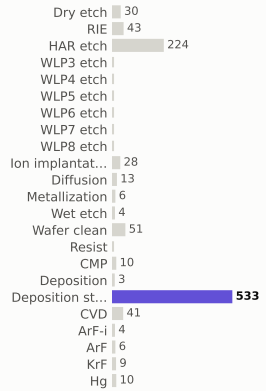

materials deposited (g)

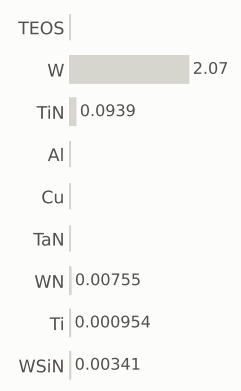

gases emitted (g)

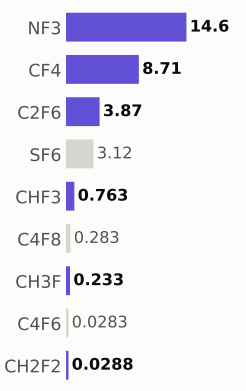

Step #13380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,373.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

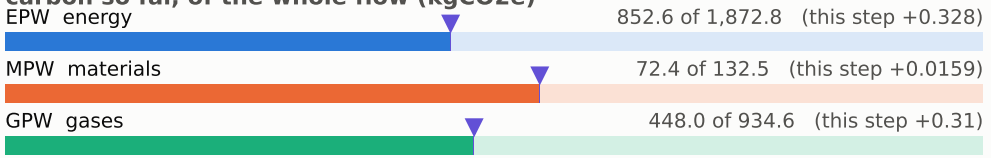

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

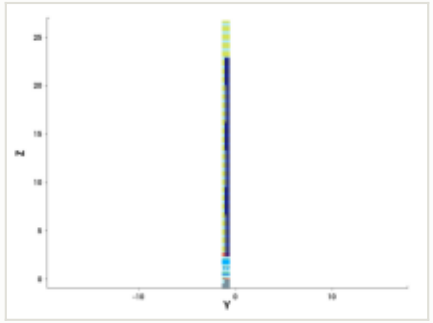

y cut at -1.035 µm

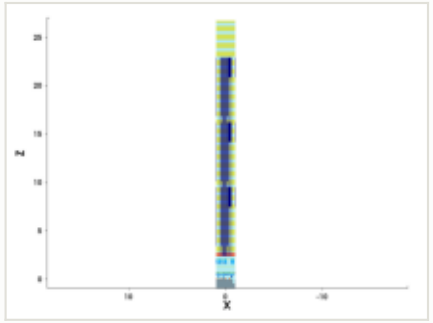

mask for this step

no mask for this step

steps by process area

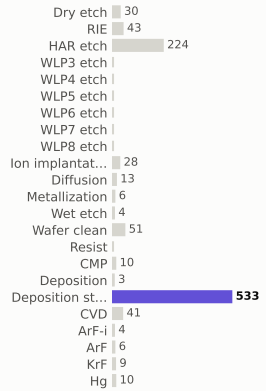

materials deposited (g)

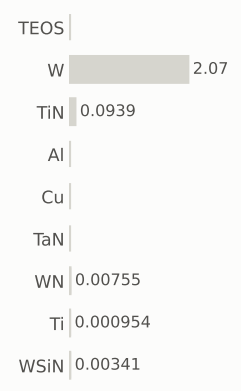

gases emitted (g)

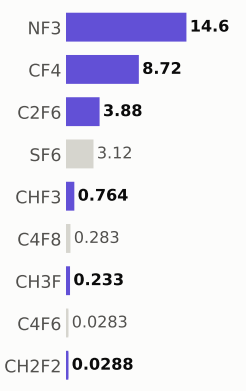

Step #13390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,373.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

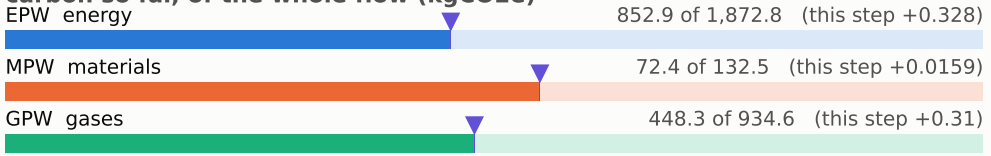

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

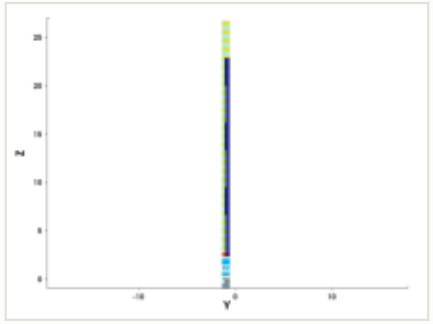

y cut at -1.035 µm

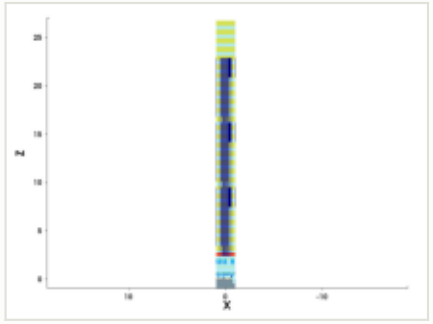

mask for this step

no mask for this step

steps by process area

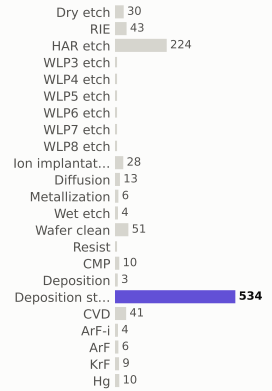

materials deposited (g)

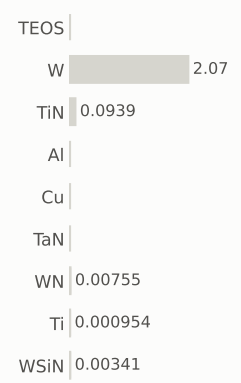

gases emitted (g)

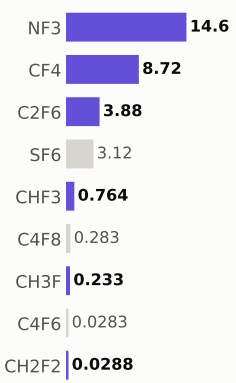

Step #13400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,374.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

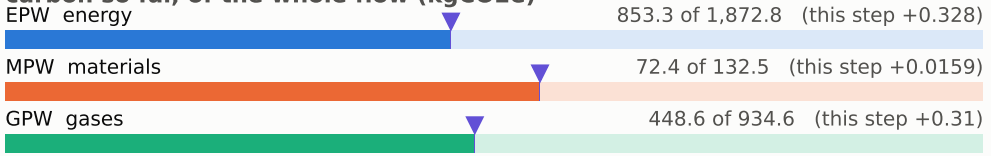

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

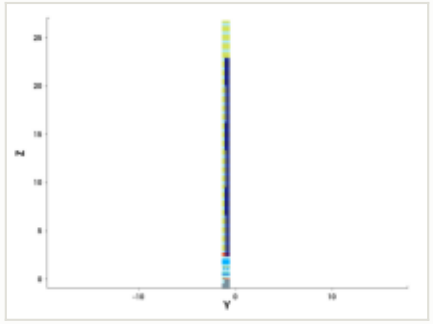

y cut at -1.035 µm

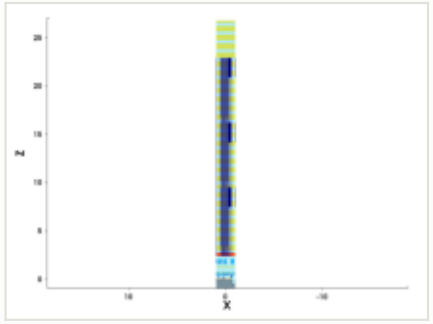

mask for this step

no mask for this step

steps by process area

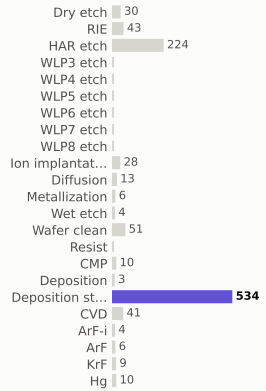

materials deposited (g)

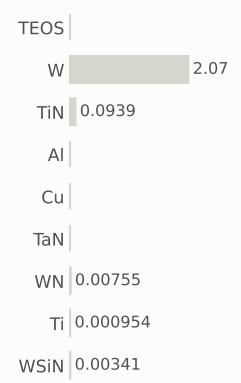

gases emitted (g)

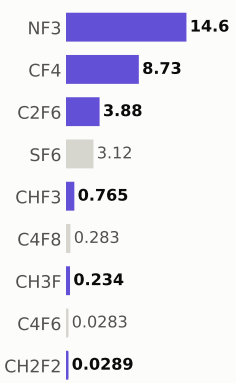

Step #13410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,375.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

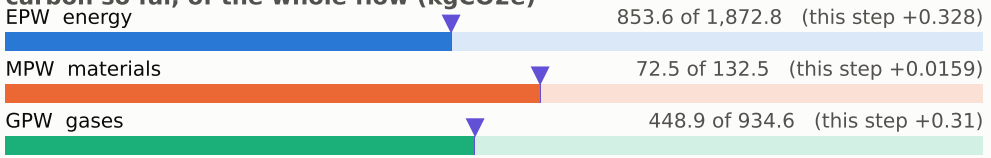

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

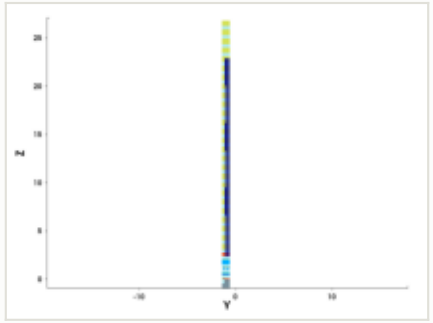

y cut at -1.035 µm

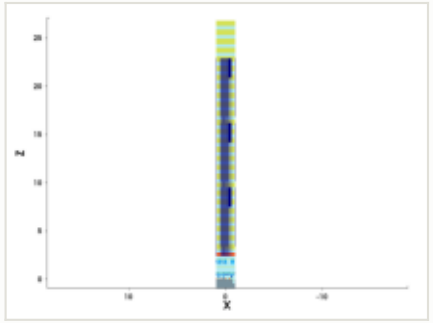

mask for this step

no mask for this step

steps by process area

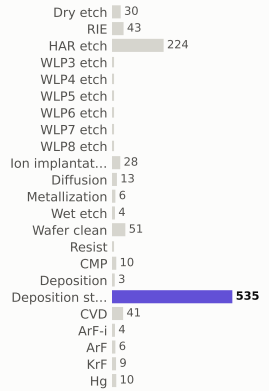

materials deposited (g)

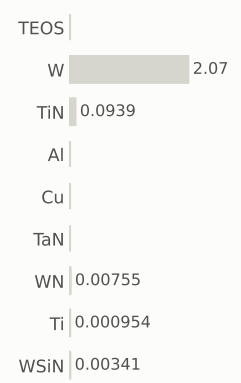

gases emitted (g)

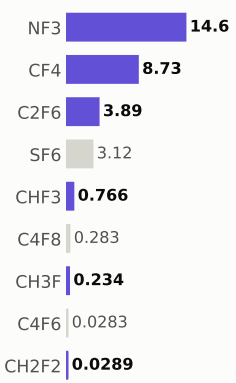

Step #13420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,375.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

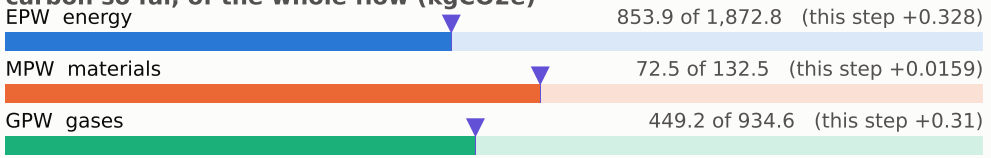

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

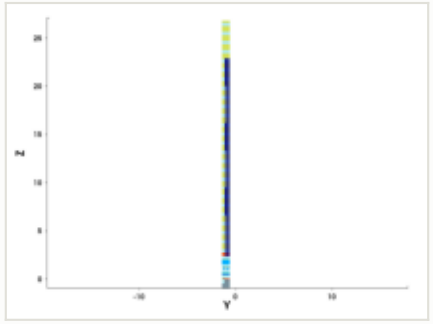

y cut at -1.035 µm

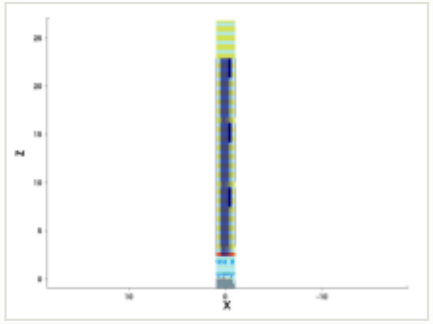

mask for this step

no mask for this step

steps by process area

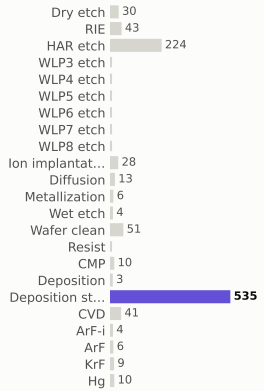

materials deposited (g)

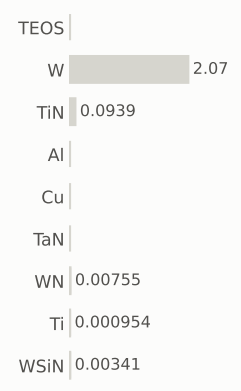

gases emitted (g)

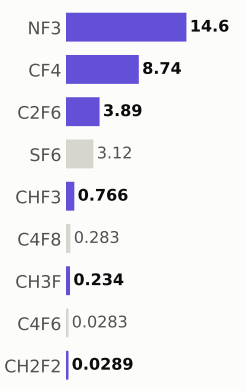

Step #13430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,376.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

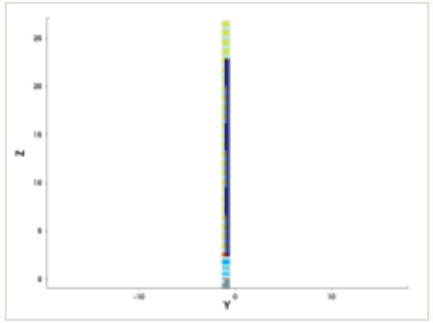

y cut at -1.035 µm

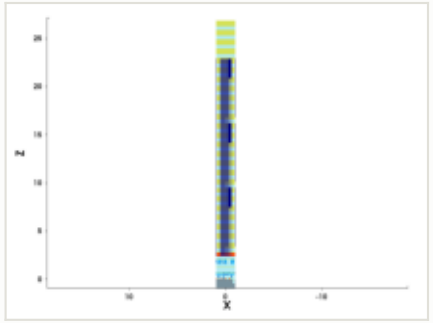

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

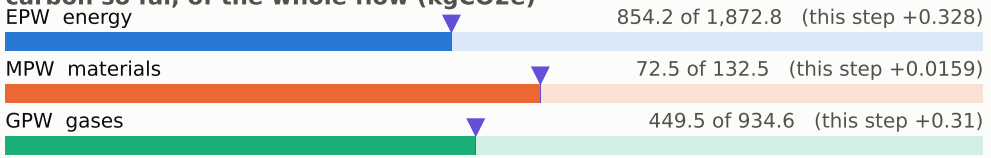

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

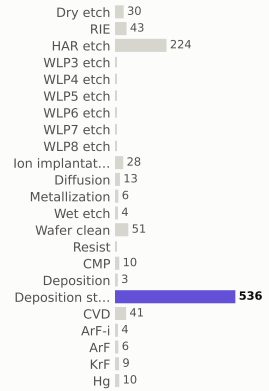

materials deposited (g)

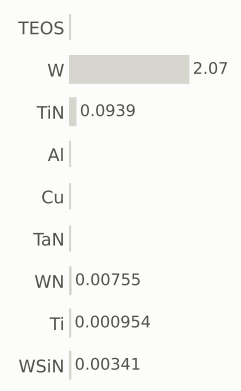

gases emitted (g)

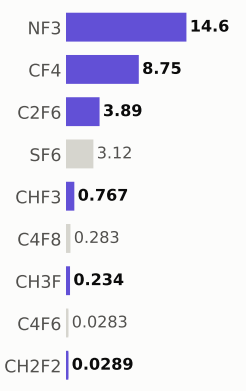

Step #13440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,376.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

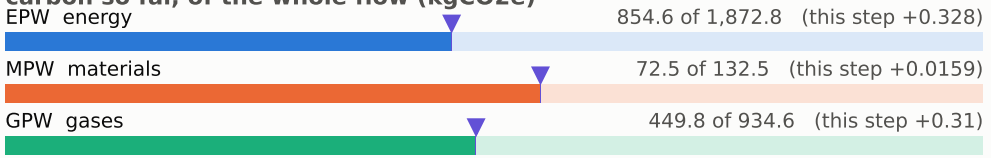

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

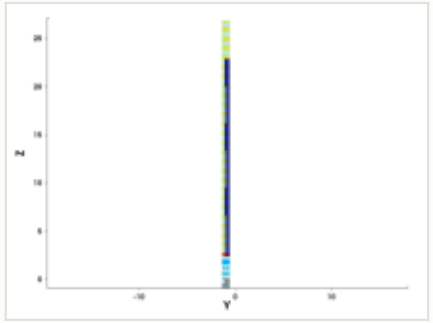

y cut at -1.035 µm

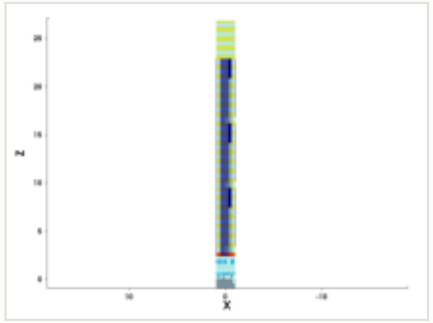

mask for this step

no mask for this step

steps by process area

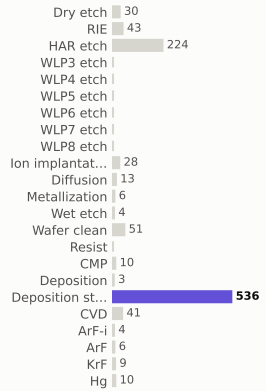

materials deposited (g)

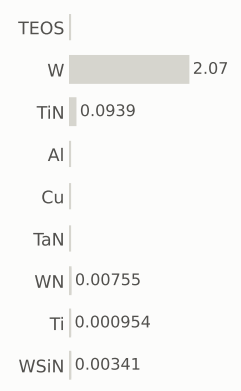

gases emitted (g)

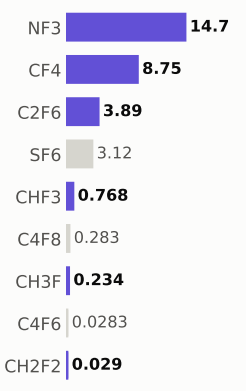

Step #13450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,377.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

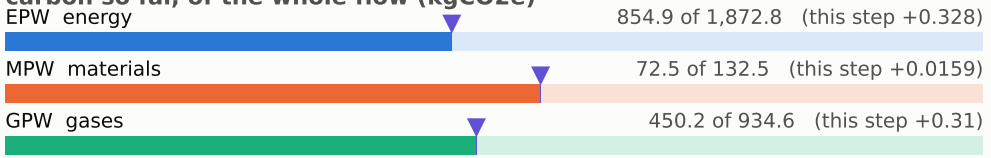

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

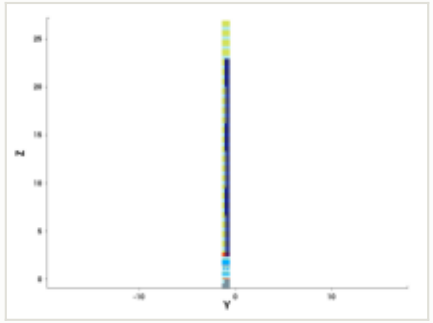

y cut at -1.035 µm

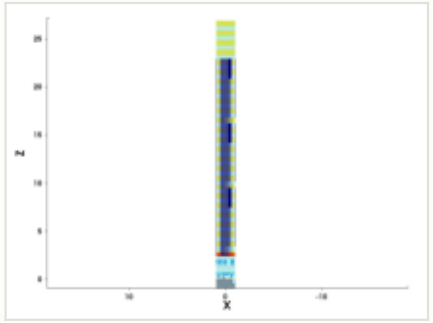

mask for this step

no mask for this step

steps by process area

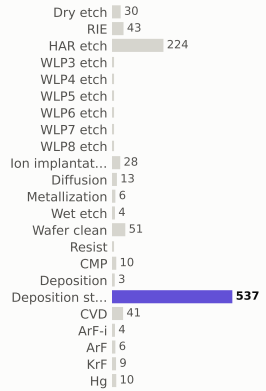

materials deposited (g)

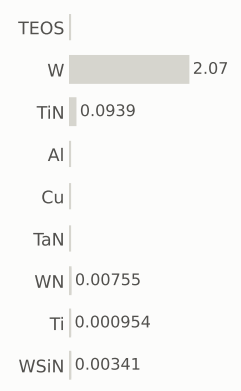

gases emitted (g)

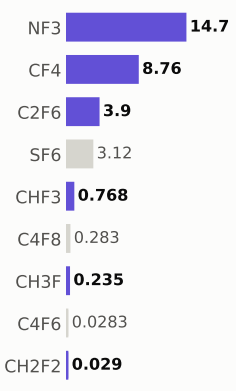

Step #13460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,378.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

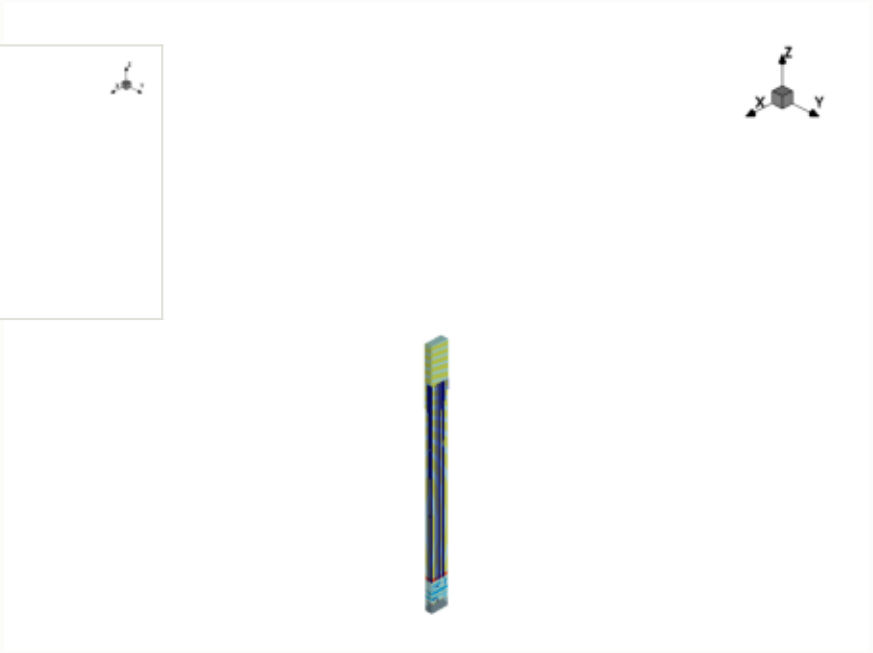

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

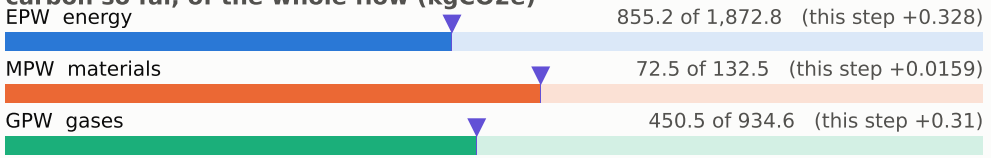

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

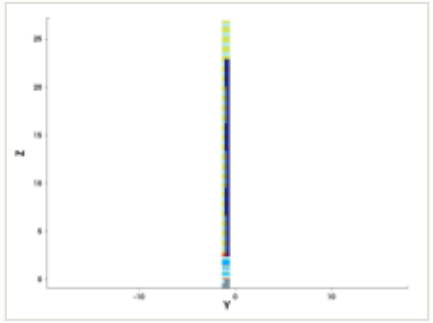

y cut at -1.035 µm

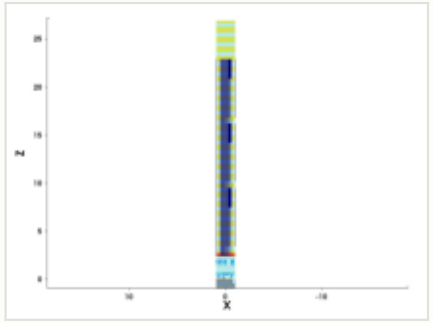

mask for this step

no mask for this step

steps by process area

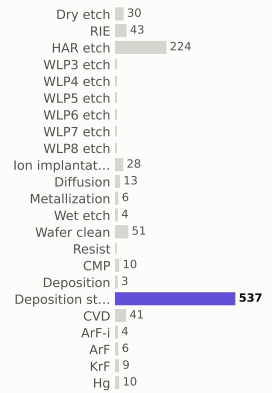

materials deposited (g)

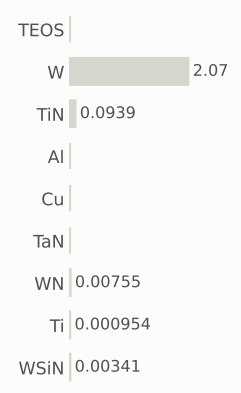

gases emitted (g)

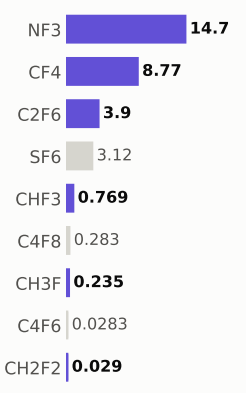

Step #13470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,378.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

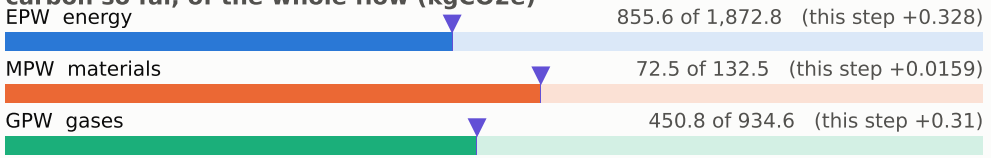

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

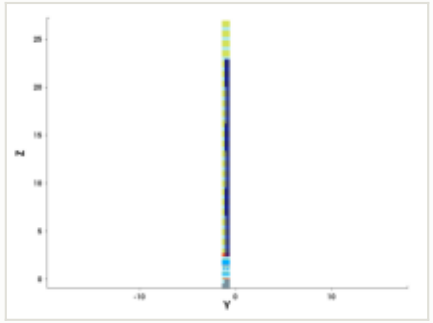

y cut at -1.035 µm

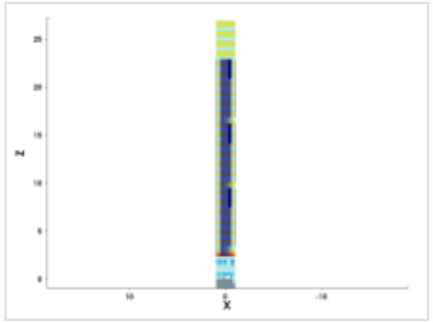

mask for this step

no mask for this step

steps by process area

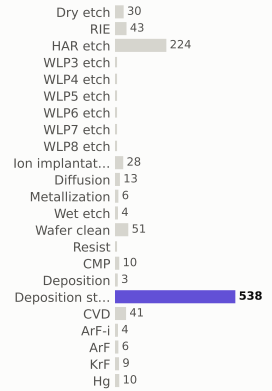

materials deposited (g)

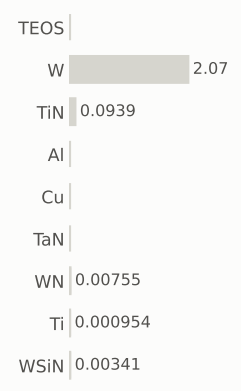

gases emitted (g)

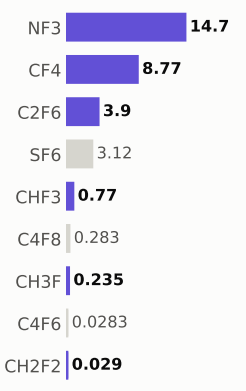

Step #13480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,379.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

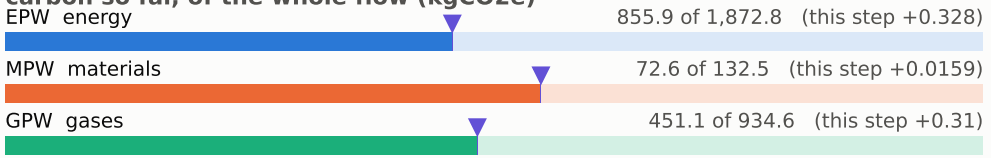

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

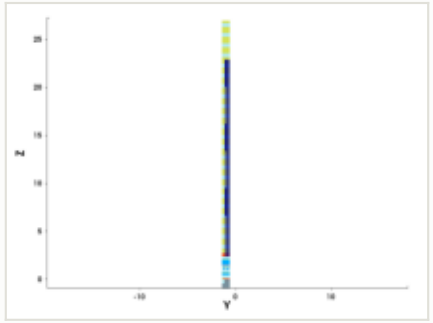

y cut at -1.035 µm

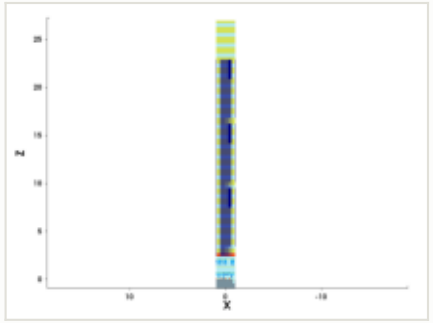

mask for this step

no mask for this step

steps by process area

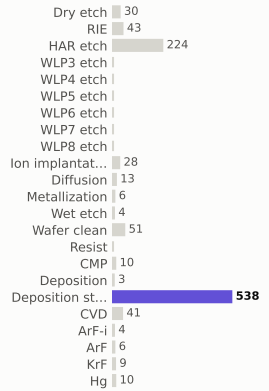

materials deposited (g)

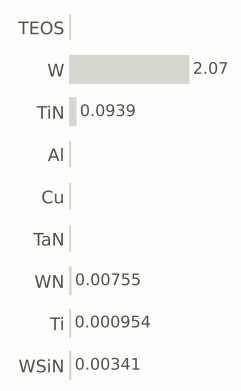

gases emitted (g)

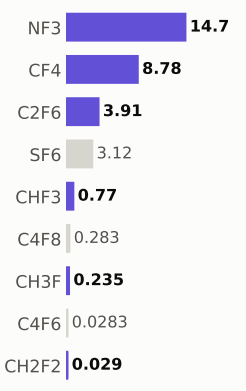

Step #13490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,380.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

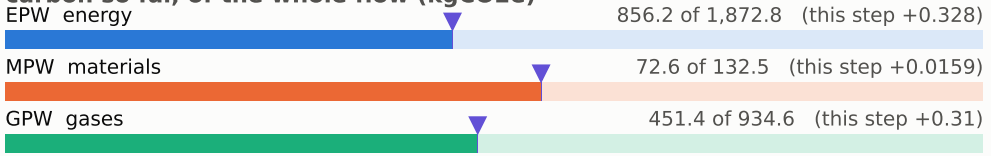

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

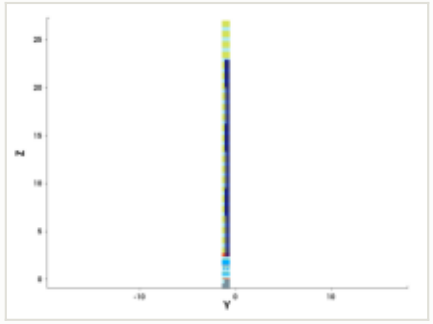

y cut at -1.035 µm

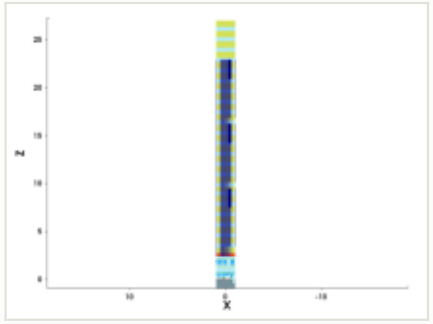

mask for this step

no mask for this step

steps by process area

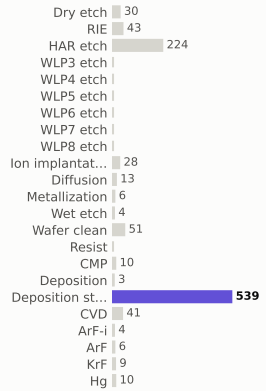

materials deposited (g)

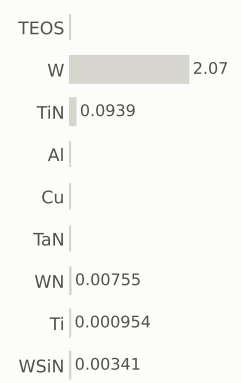

gases emitted (g)

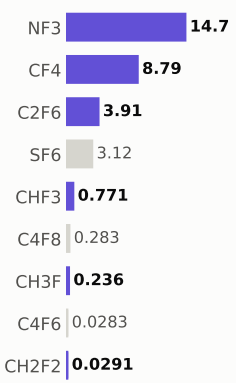

Step #13500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,380.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

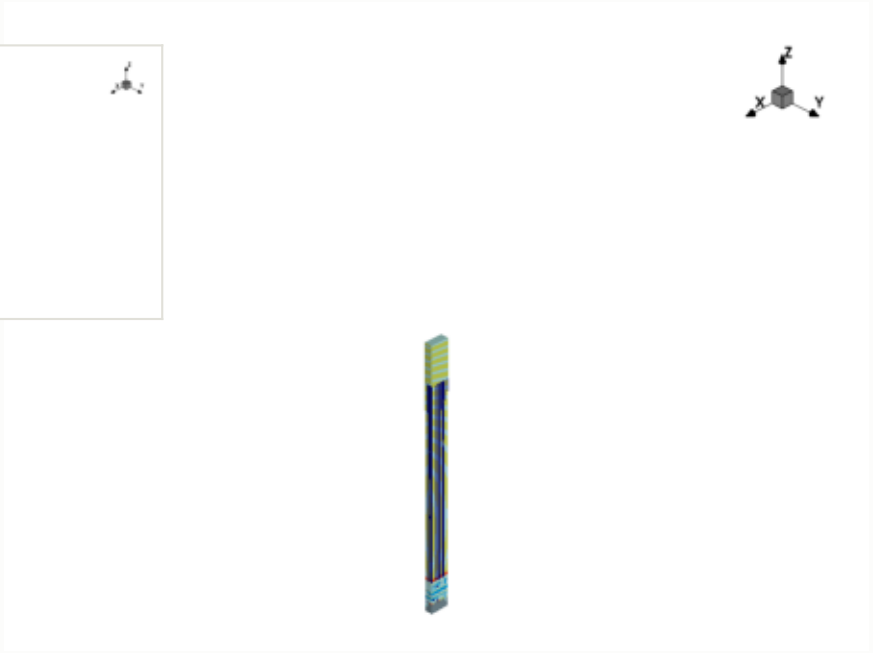

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

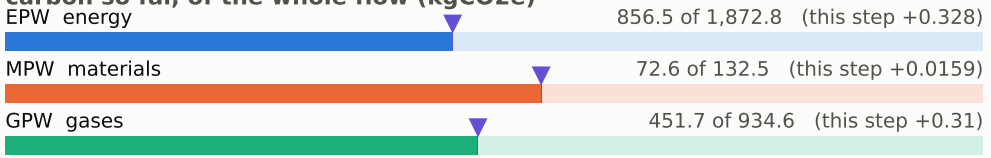

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

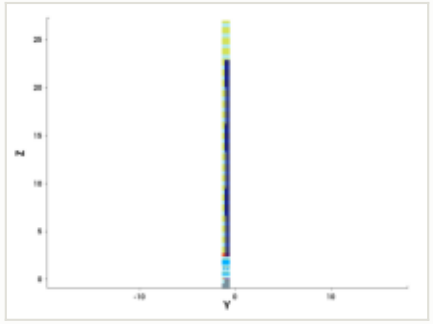

y cut at -1.035 µm

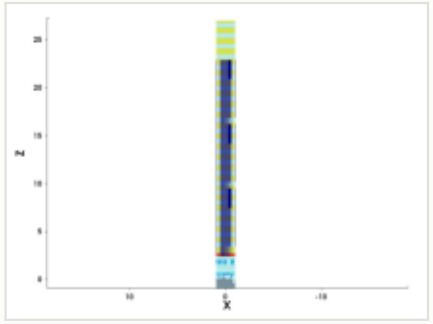

mask for this step

no mask for this step

steps by process area

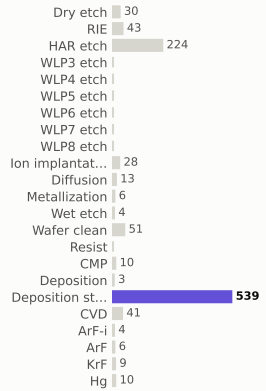

materials deposited (g)

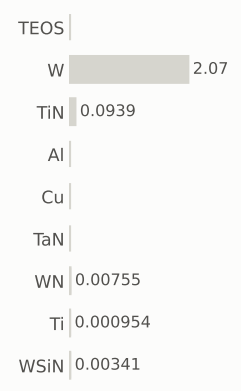

gases emitted (g)

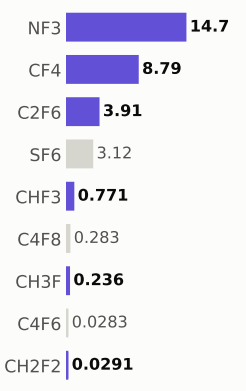

Step #13510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,381.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

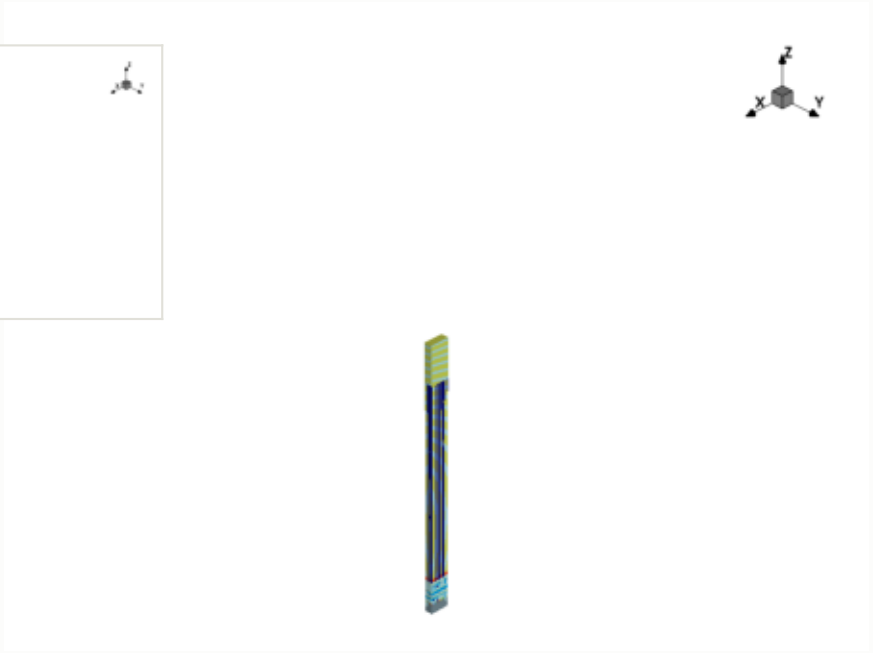

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

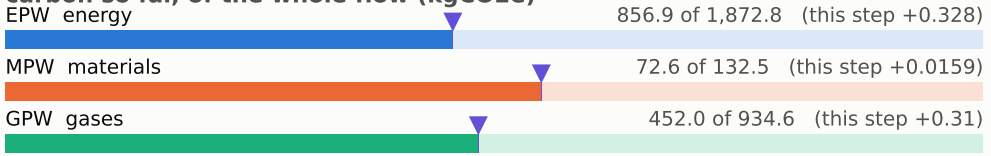

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

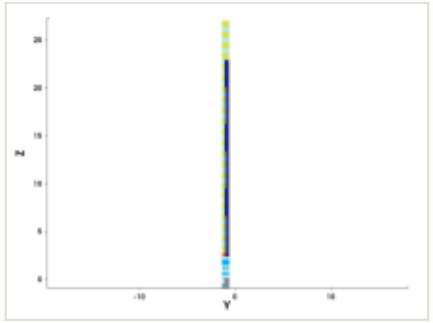

y cut at -1.035 µm

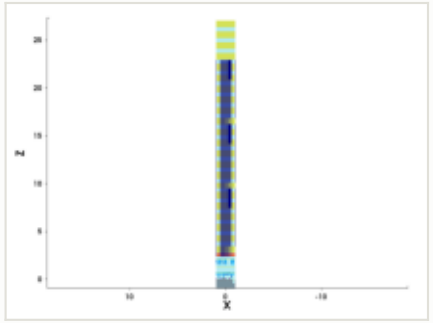

mask for this step

no mask for this step

steps by process area

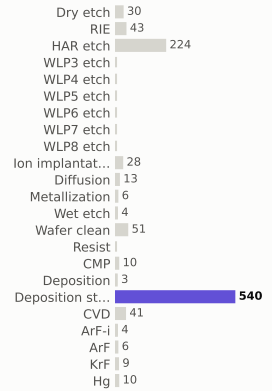

materials deposited (g)

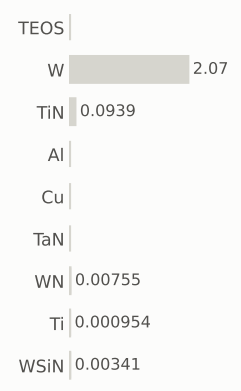

gases emitted (g)

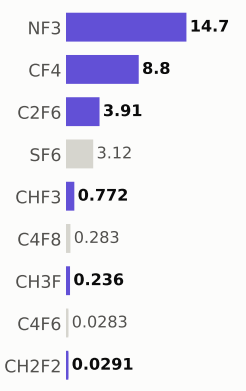

Step #13520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,382.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

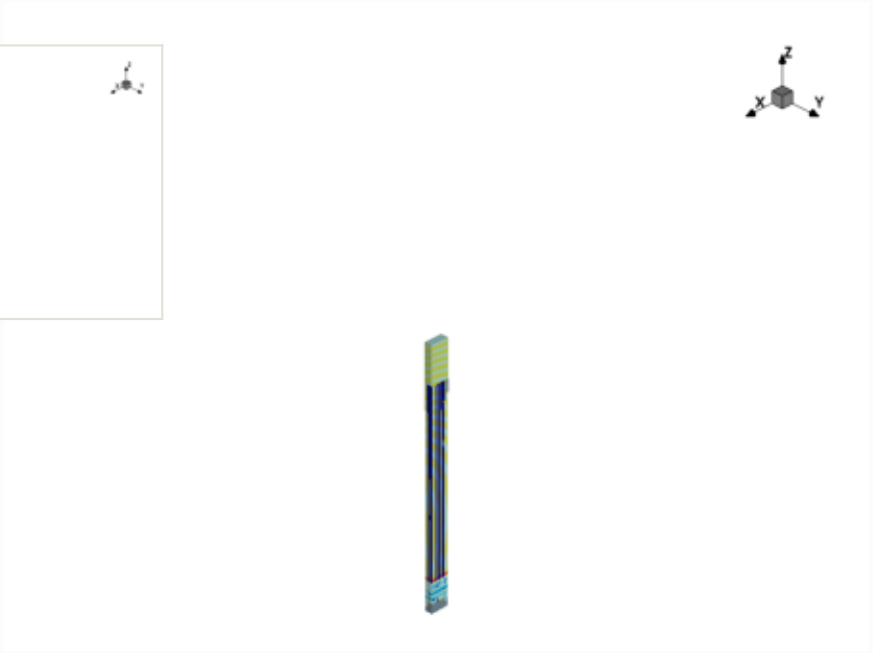

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

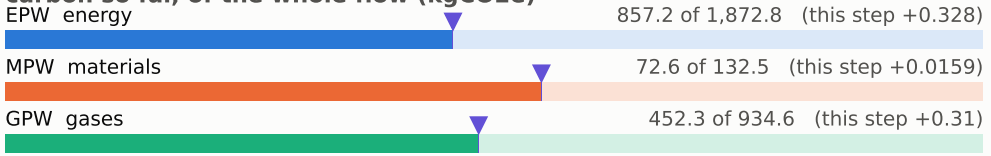

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

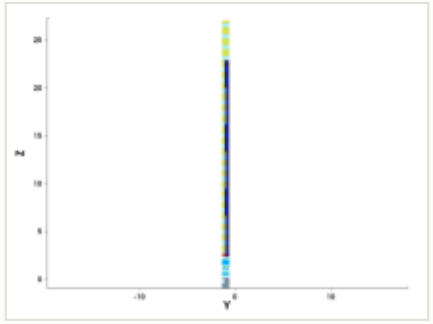

y cut at -1.035 µm

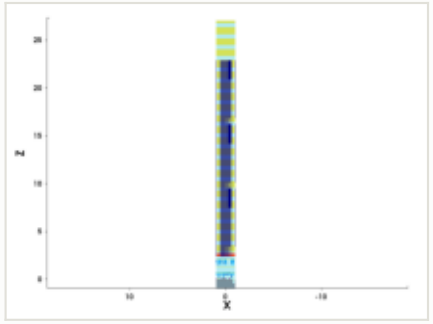

mask for this step

no mask for this step

steps by process area

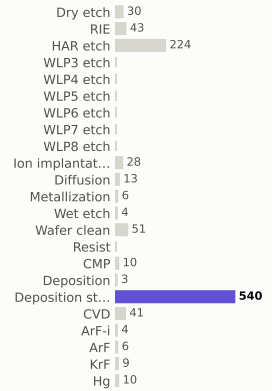

materials deposited (g)

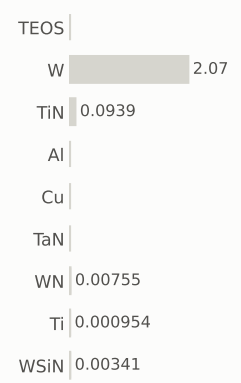

gases emitted (g)

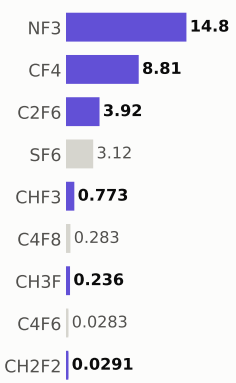

Step #13530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,382.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

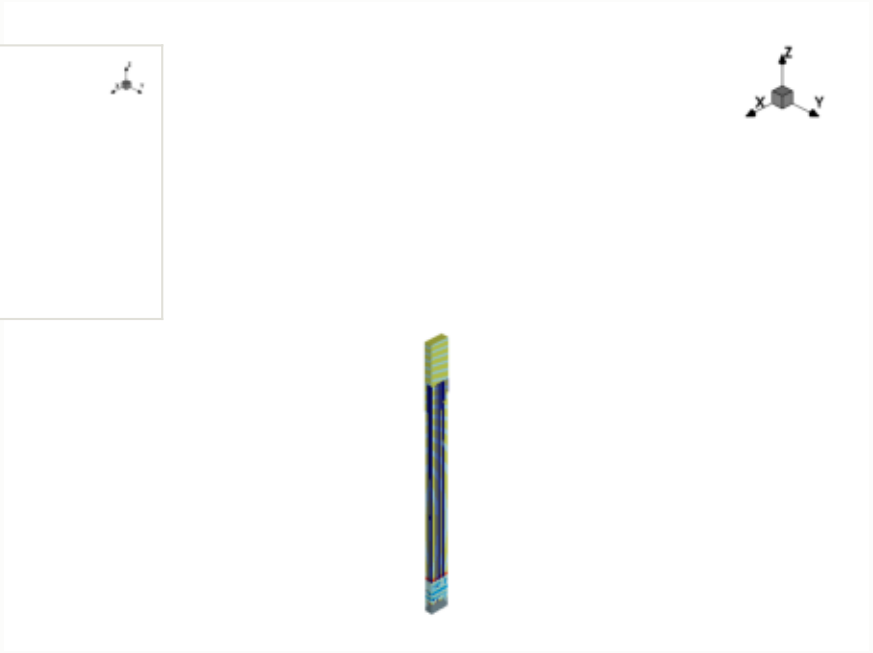

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

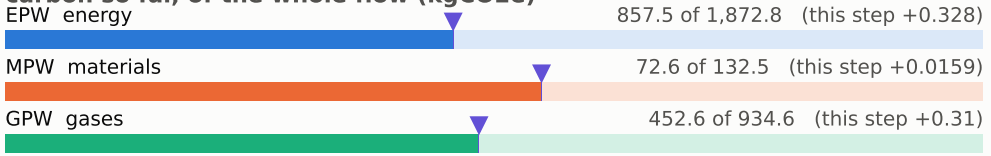

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

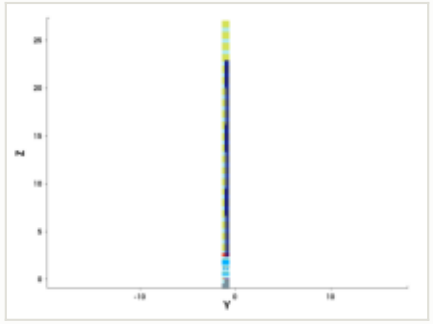

y cut at -1.035 µm

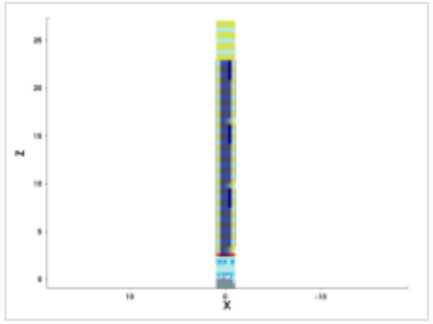

mask for this step

no mask for this step

steps by process area

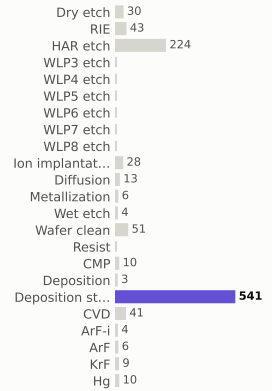

materials deposited (g)

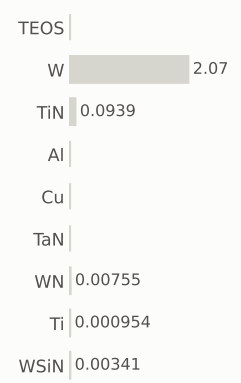

gases emitted (g)

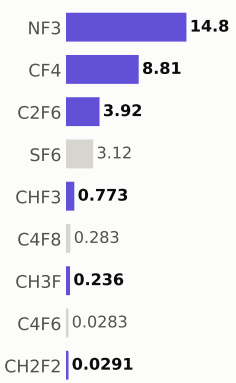

Step #13540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,383.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

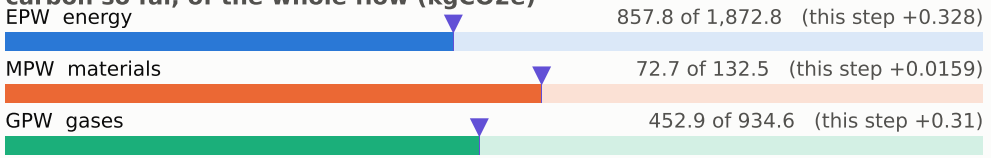

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

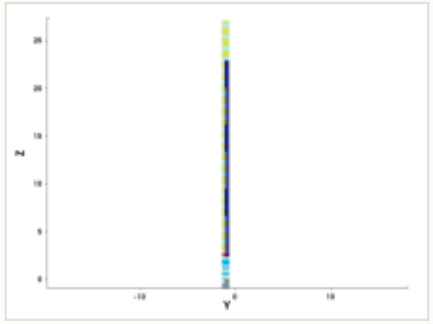

y cut at -1.035 µm

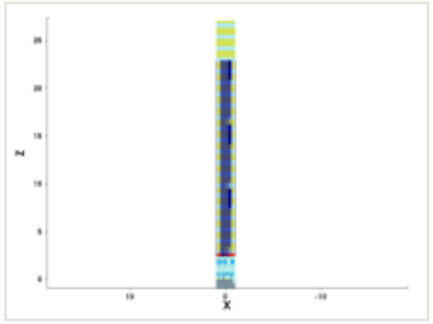

mask for this step

no mask for this step

steps by process area

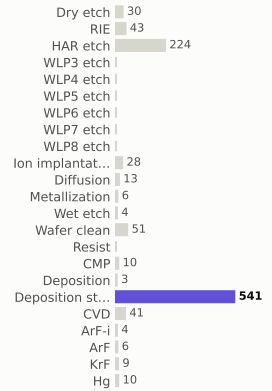

materials deposited (g)

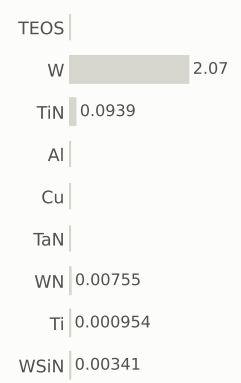

gases emitted (g)

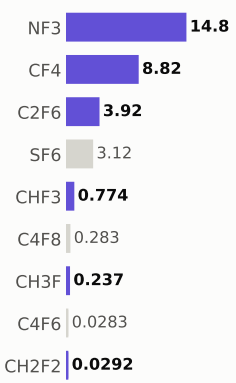

Step #13550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,384.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

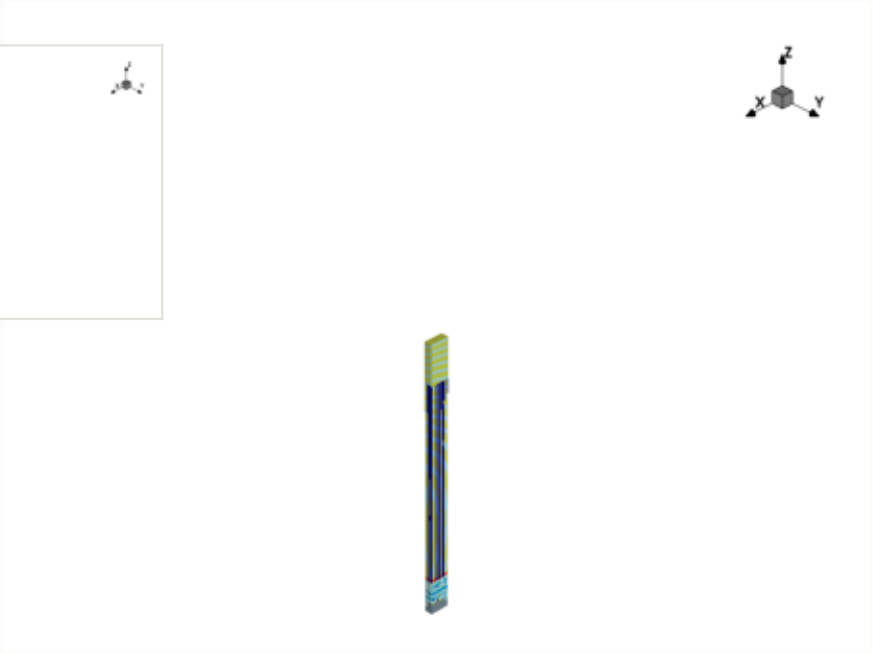

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

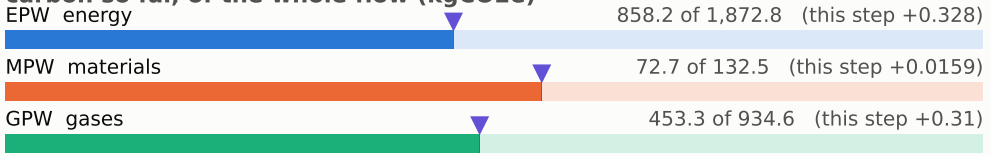

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

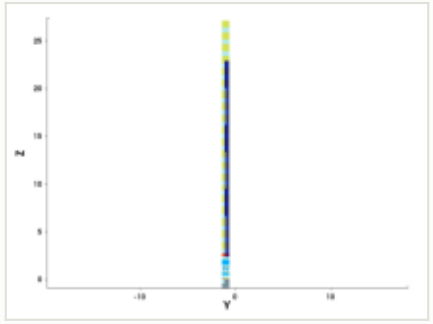

y cut at -1.035 µm

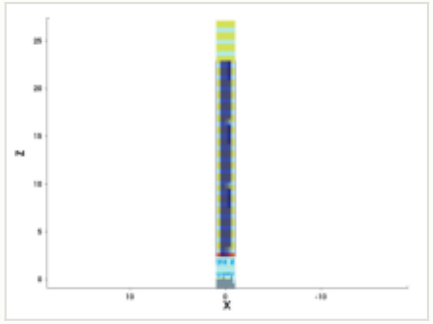

mask for this step

no mask for this step

steps by process area

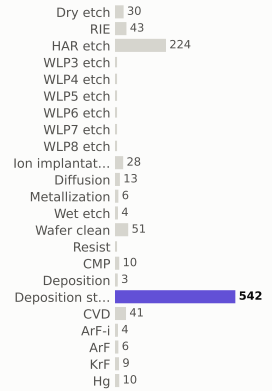

materials deposited (g)

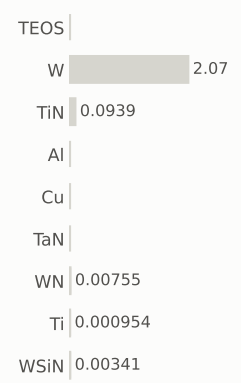

gases emitted (g)

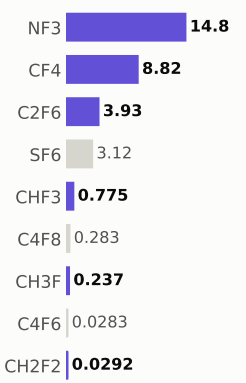

Step #13560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,384.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

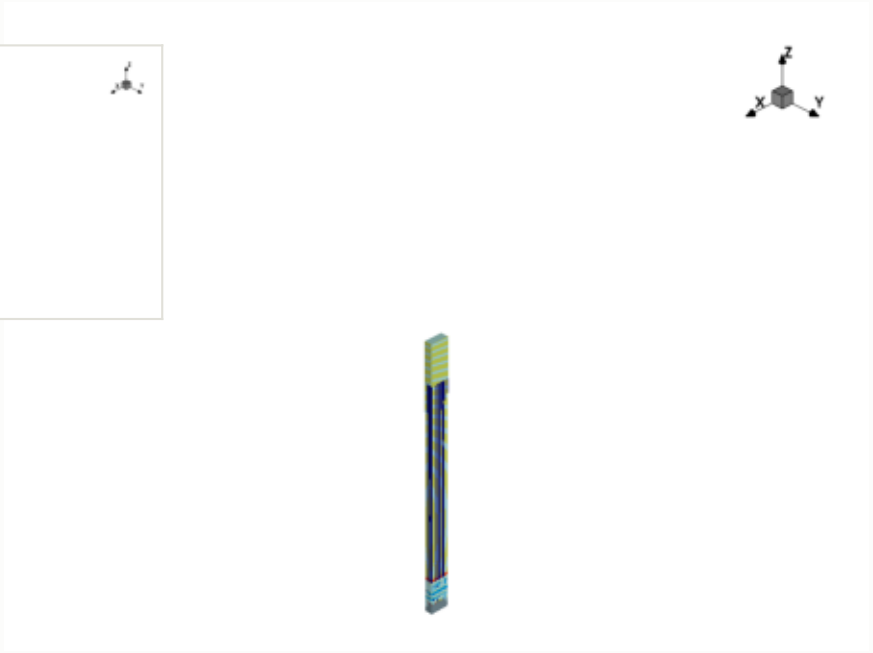

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

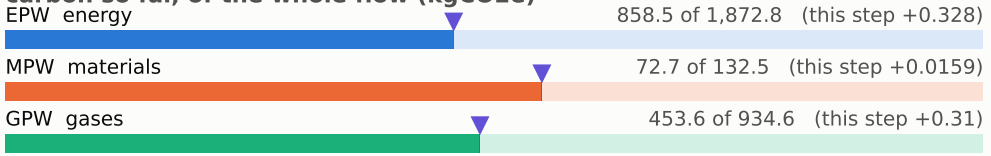

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

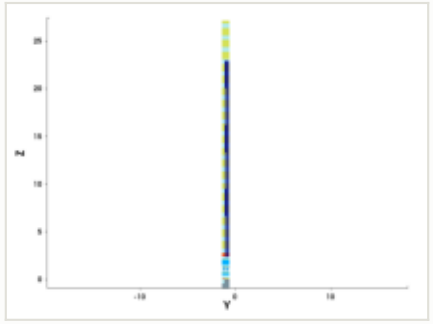

y cut at -1.035 µm

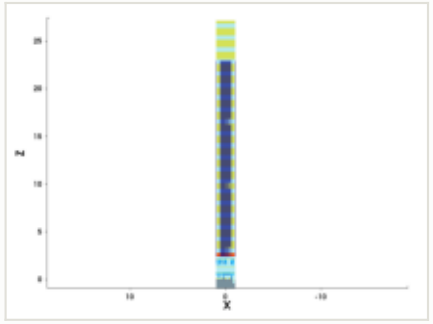

mask for this step

no mask for this step

steps by process area

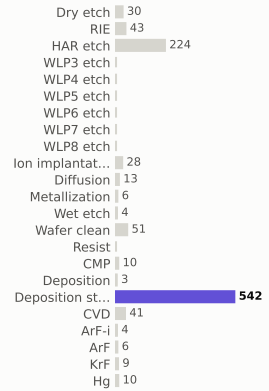

materials deposited (g)

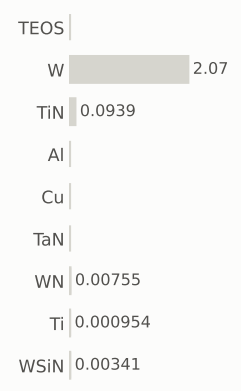

gases emitted (g)

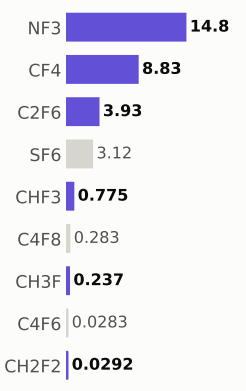

Step #13570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,385.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

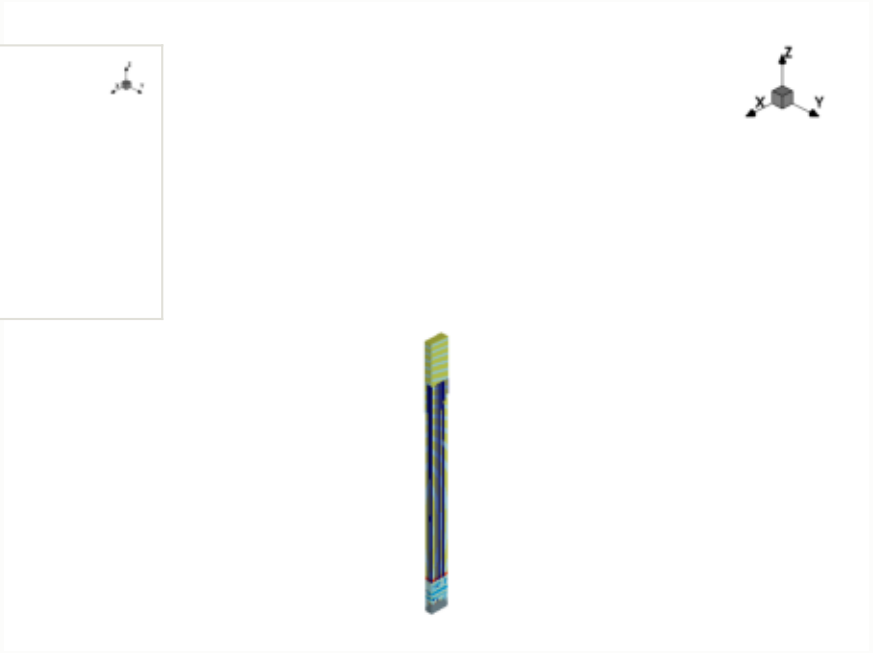

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

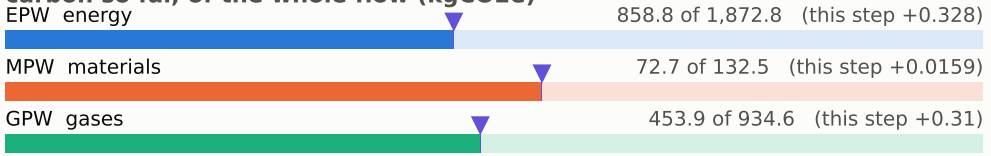

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

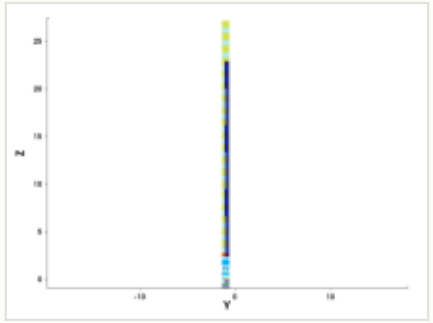

y cut at -1.035 µm

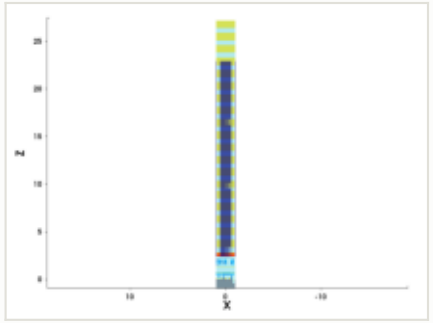

mask for this step

no mask for this step

steps by process area

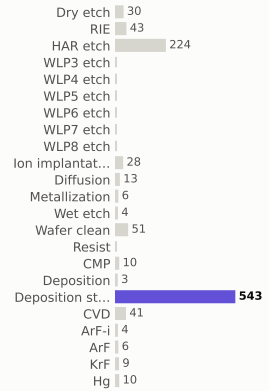

materials deposited (g)

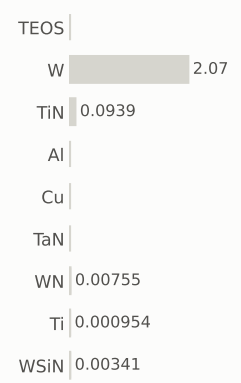

gases emitted (g)

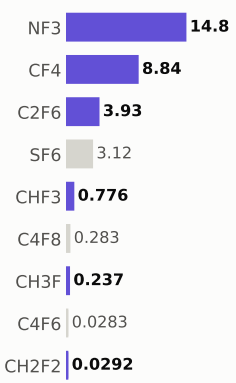

Step #13580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,386.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

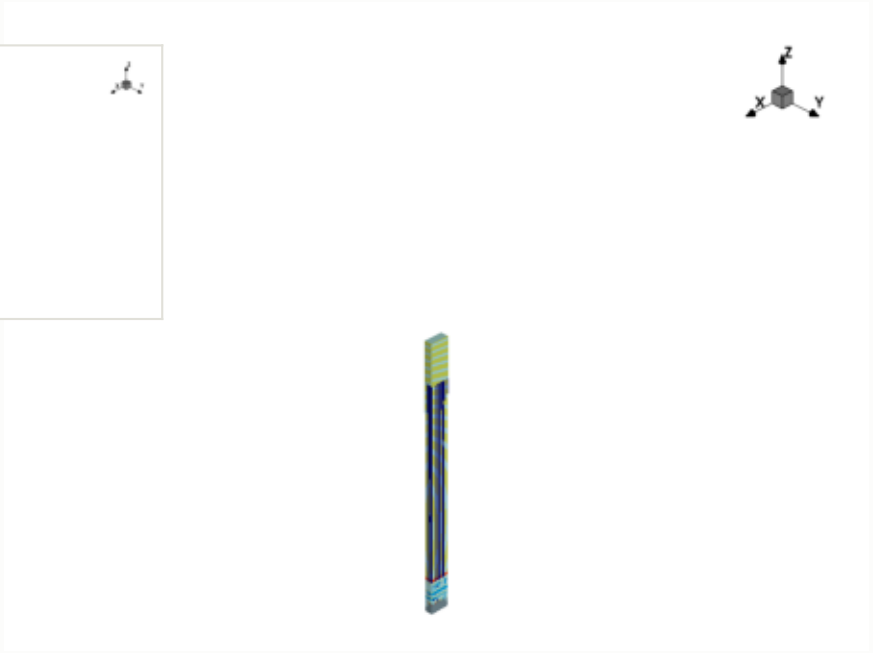

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

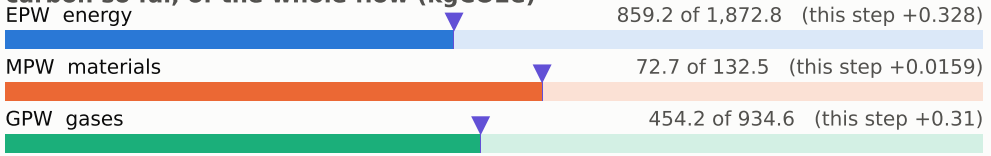

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

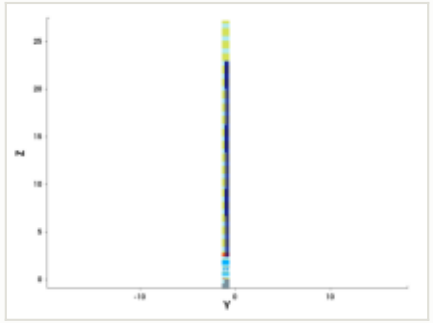

y cut at -1.035 µm

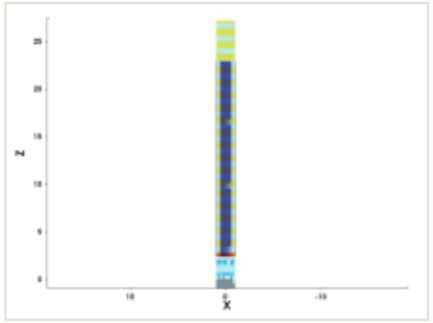

mask for this step

no mask for this step

steps by process area

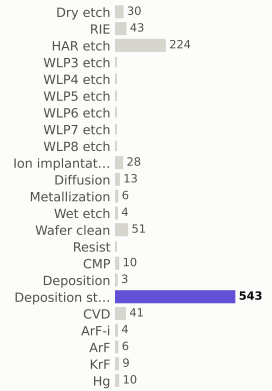

materials deposited (g)

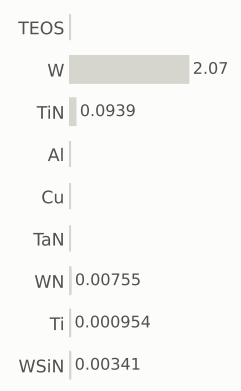

gases emitted (g)

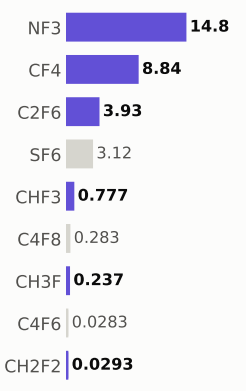

Step #13590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,386.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

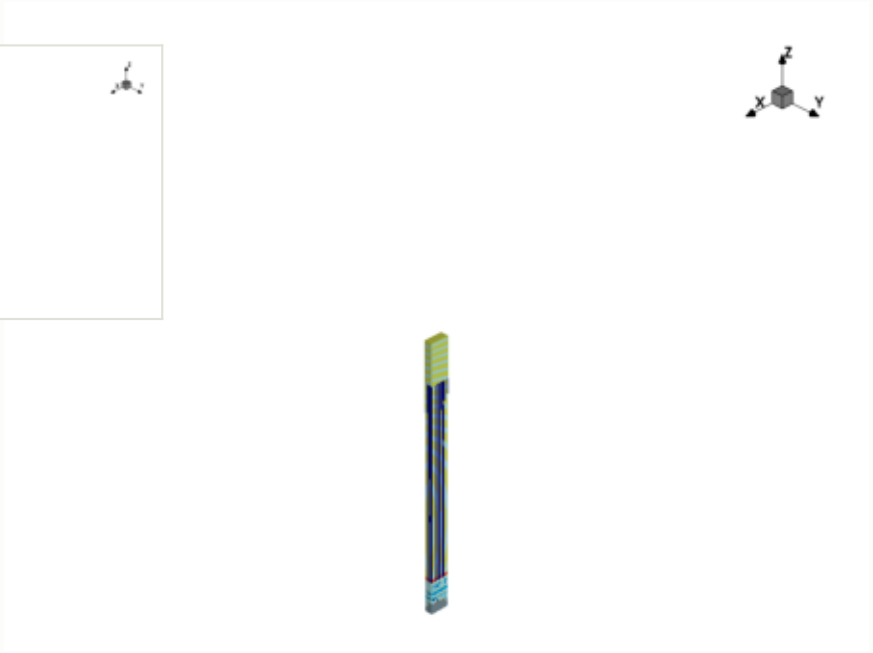

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

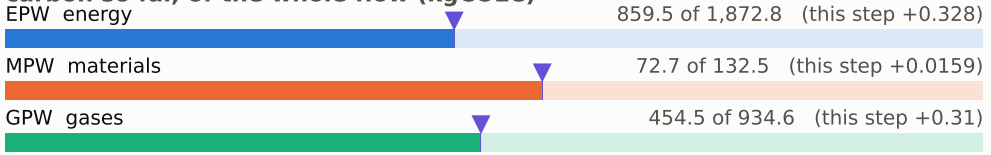

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

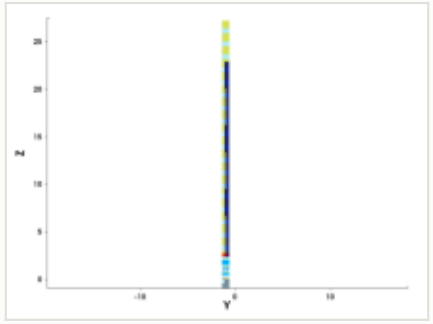

y cut at -1.035 µm

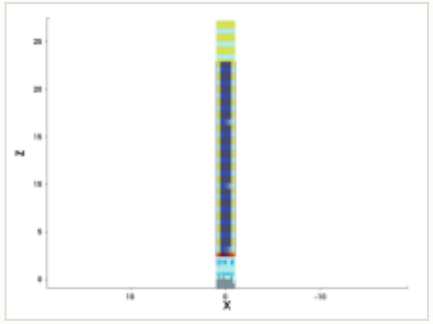

mask for this step

no mask for this step

steps by process area

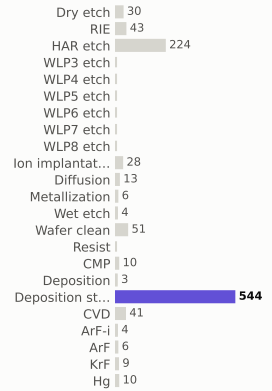

materials deposited (g)

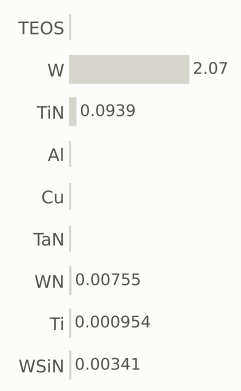

gases emitted (g)

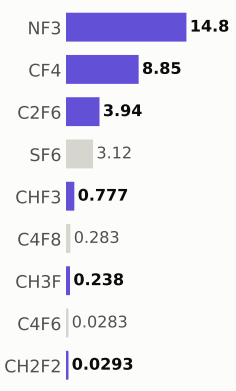

Step #13600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,387.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

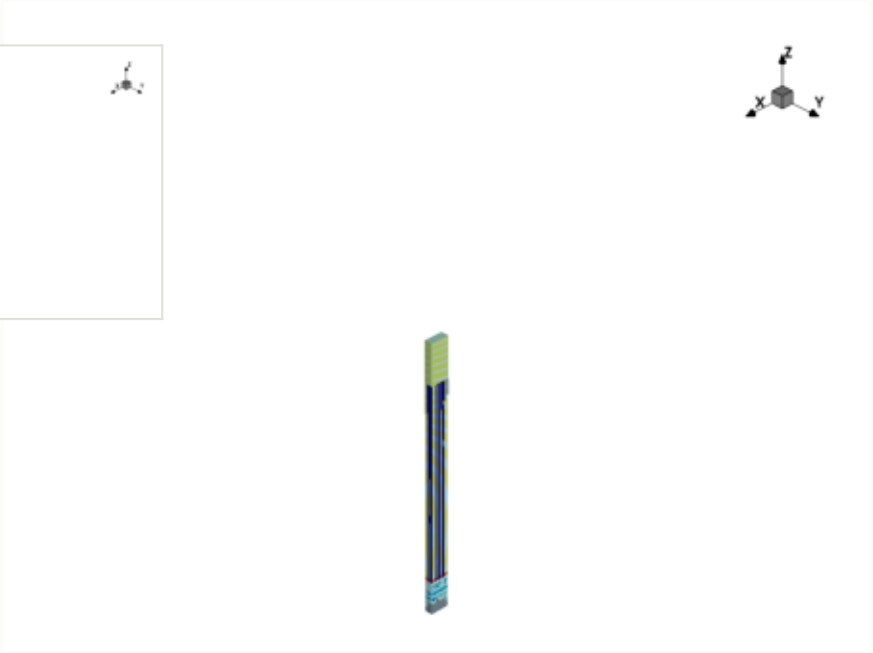

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

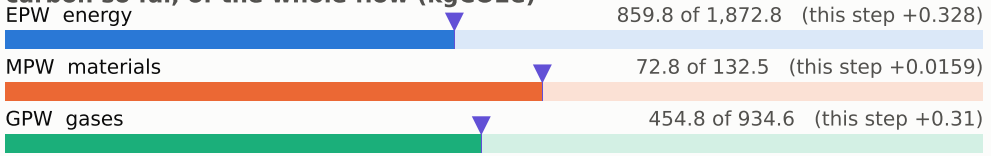

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

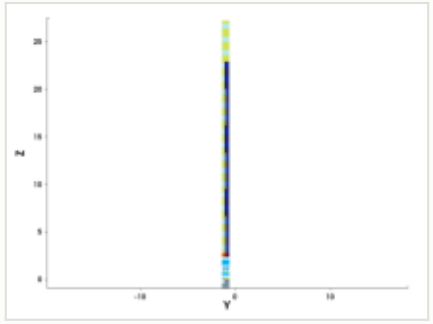

y cut at -1.035 µm

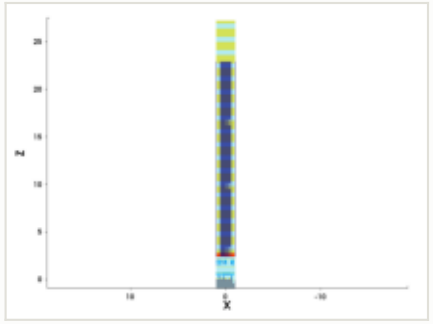

mask for this step

no mask for this step

steps by process area

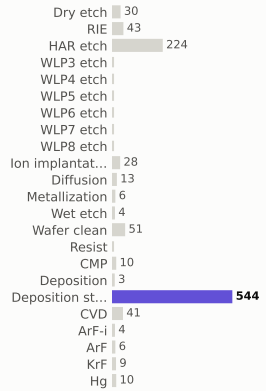

materials deposited (g)

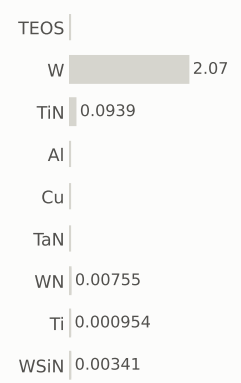

gases emitted (g)

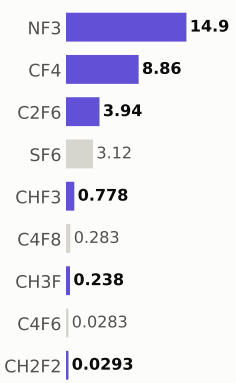

Step #13610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,388.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

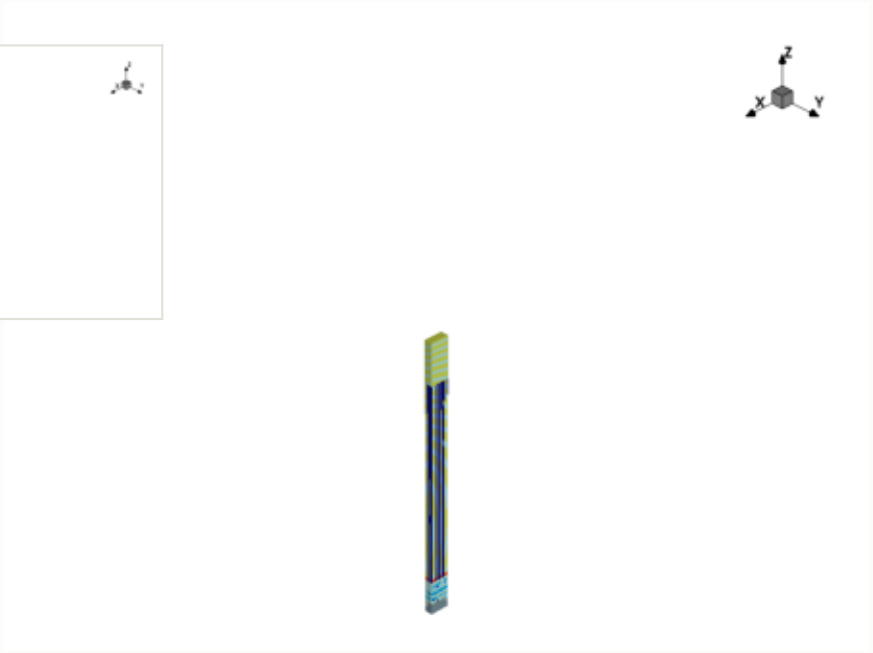

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

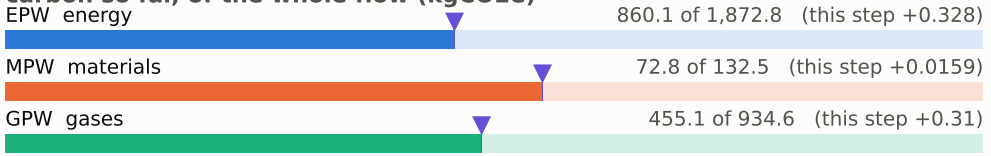

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

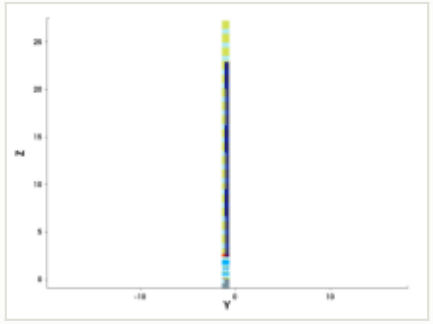

y cut at -1.035 µm

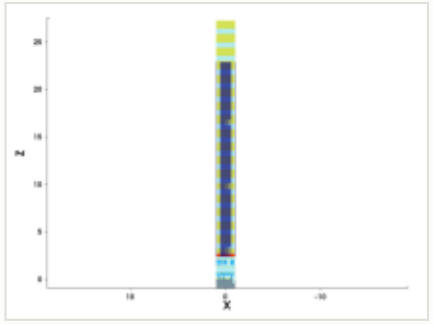

mask for this step

no mask for this step

steps by process area

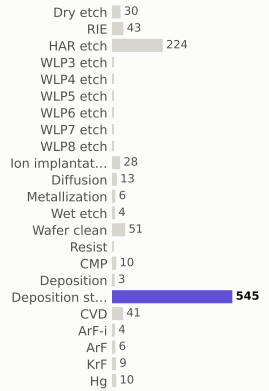

materials deposited (g)

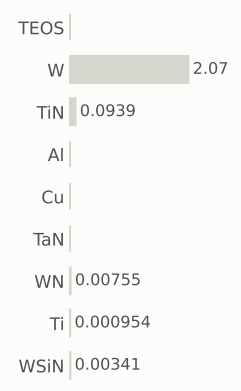

gases emitted (g)

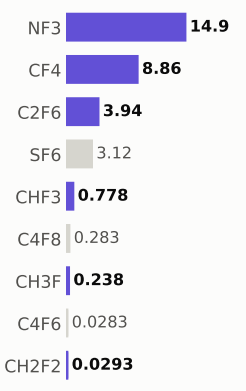

Step #13620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,388.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

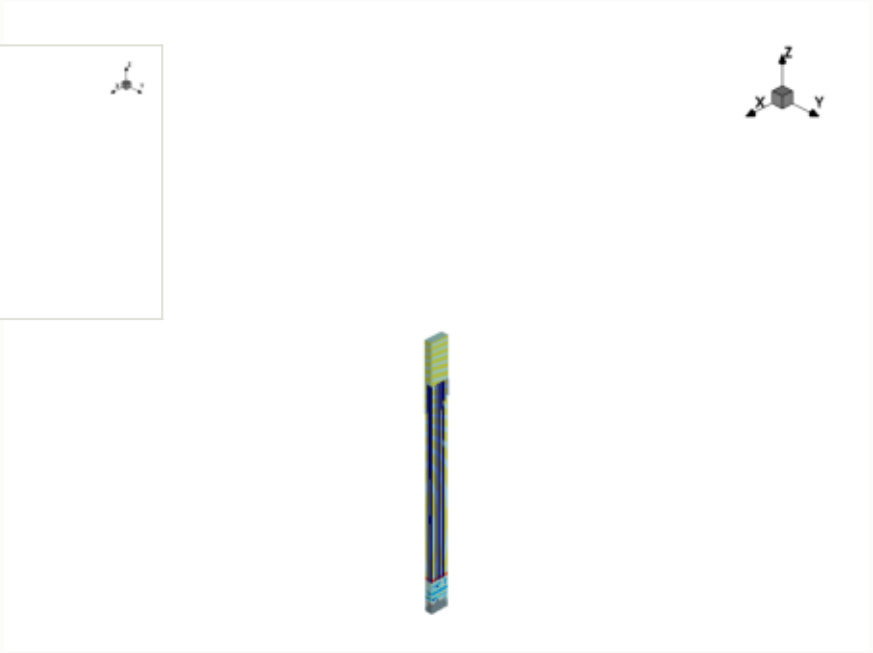

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

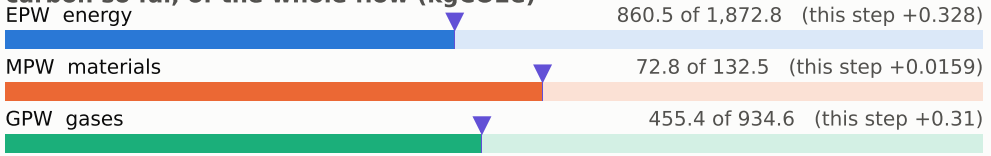

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

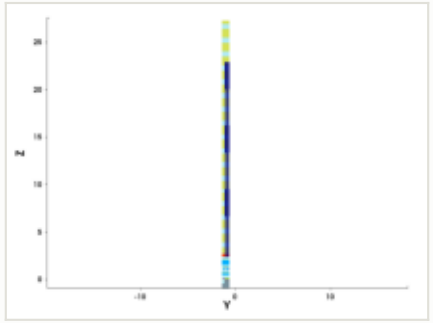

y cut at -1.035 µm

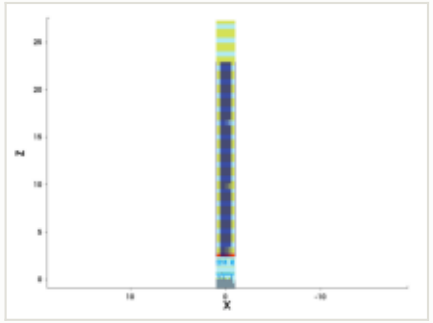

mask for this step

no mask for this step

steps by process area

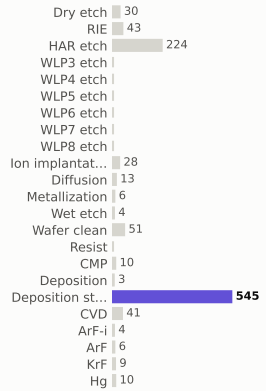

materials deposited (g)

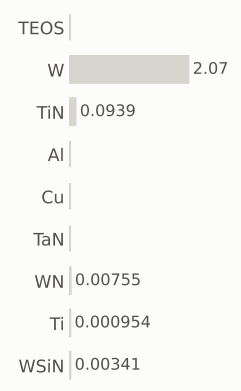

gases emitted (g)

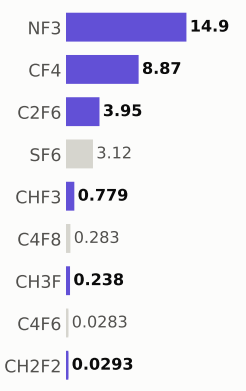

Step #13630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,389.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

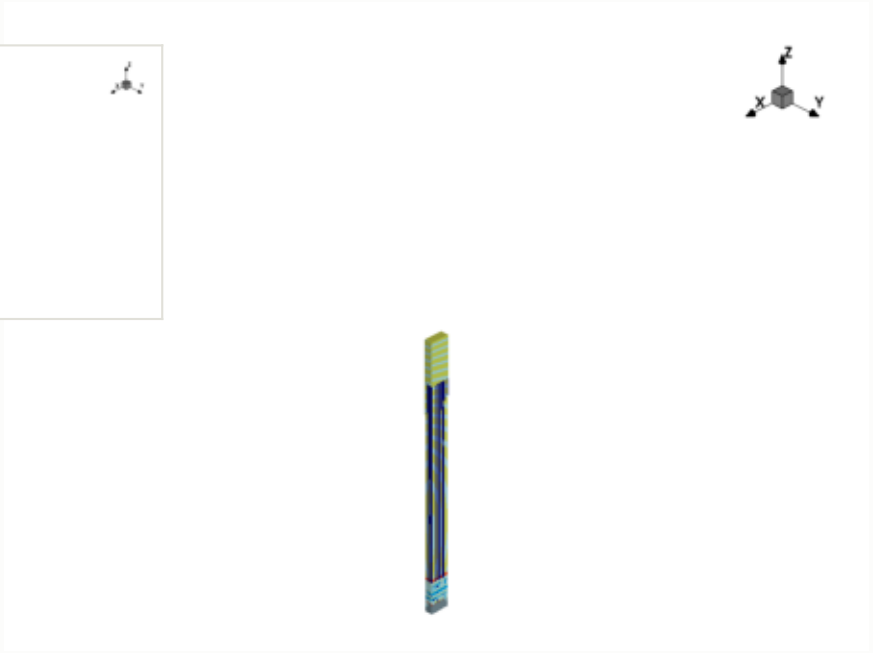

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

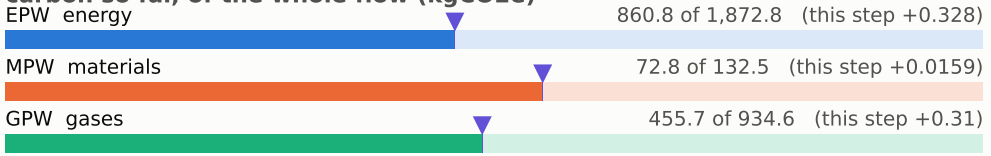

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

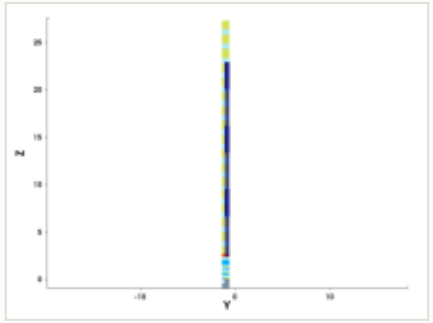

y cut at -1.035 µm

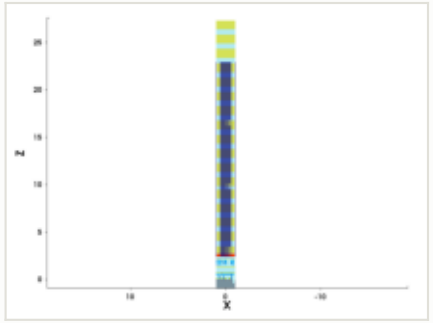

mask for this step

no mask for this step

steps by process area

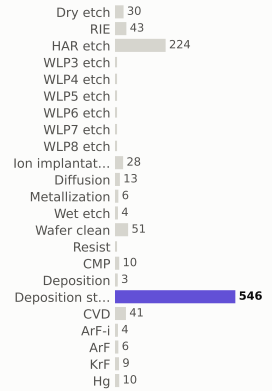

materials deposited (g)

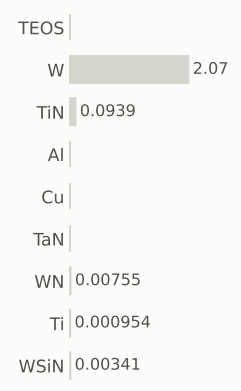

gases emitted (g)

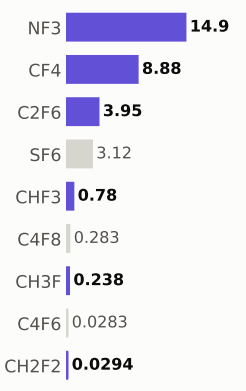

Step #13640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,390.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

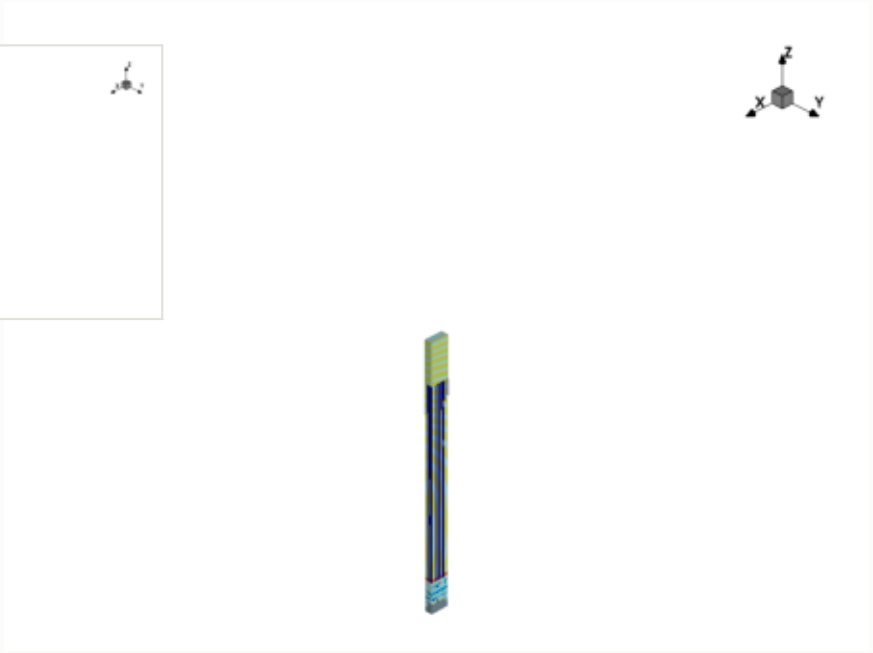

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

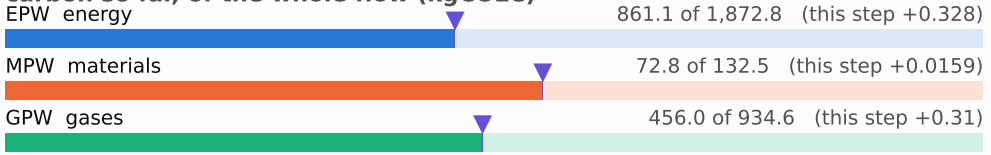

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

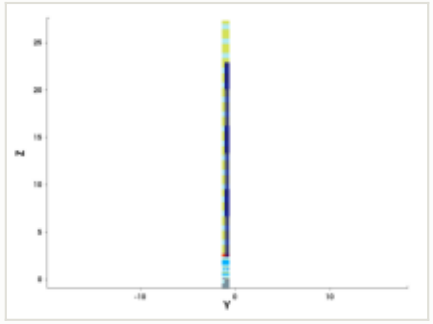

y cut at -1.035 µm

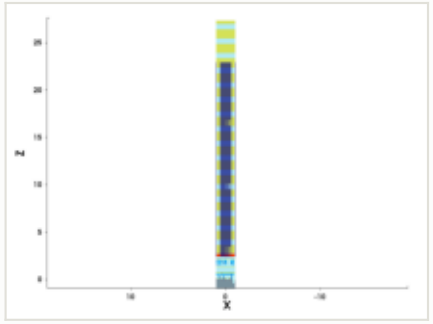

mask for this step

no mask for this step

steps by process area

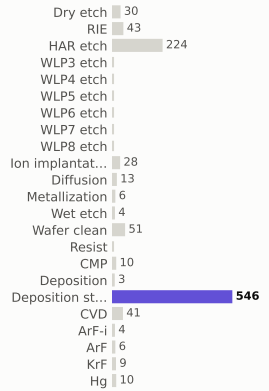

materials deposited (g)

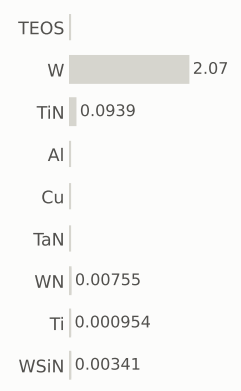

gases emitted (g)

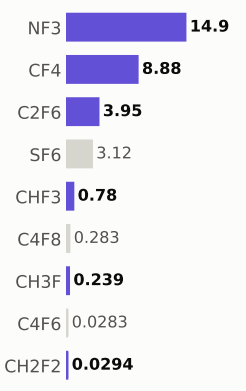

Step #13650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,390.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

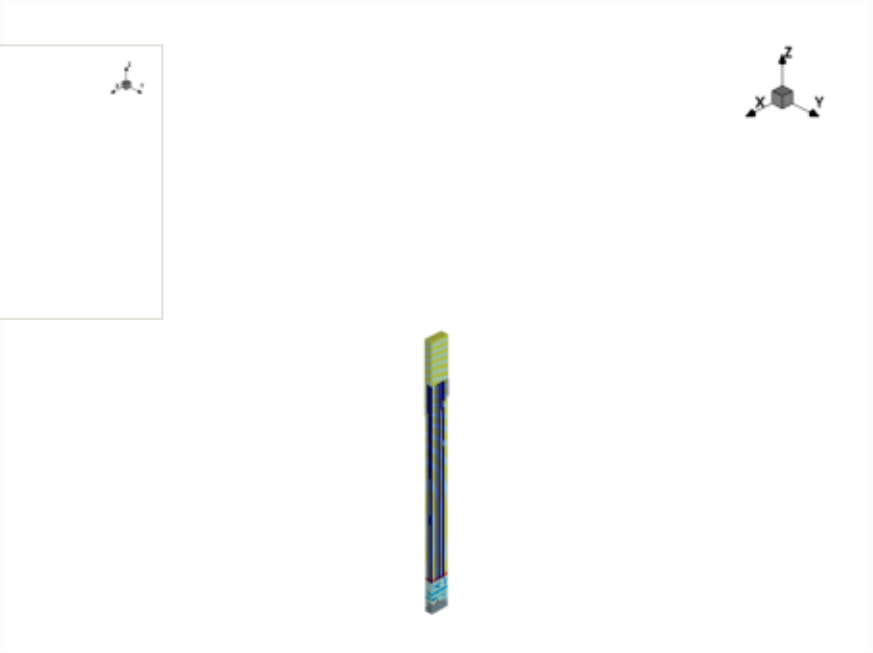

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

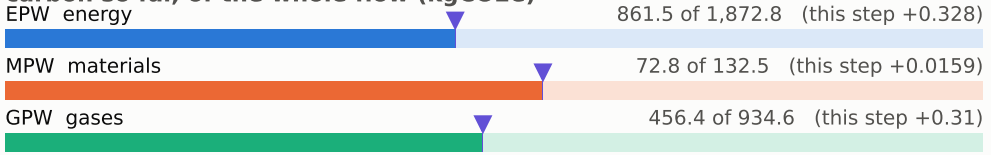

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

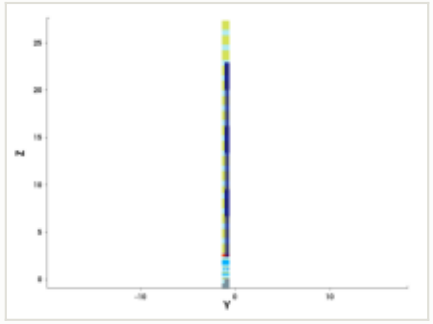

y cut at -1.035 µm

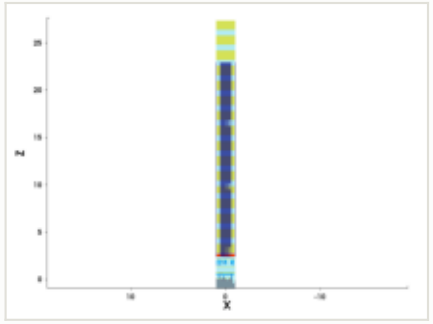

mask for this step

no mask for this step

steps by process area

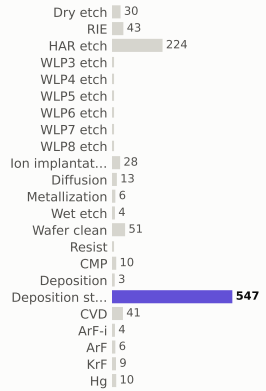

materials deposited (g)

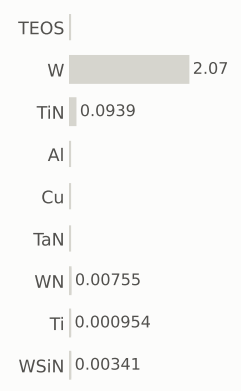

gases emitted (g)

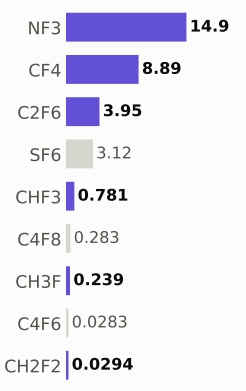

Step #13660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,391.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

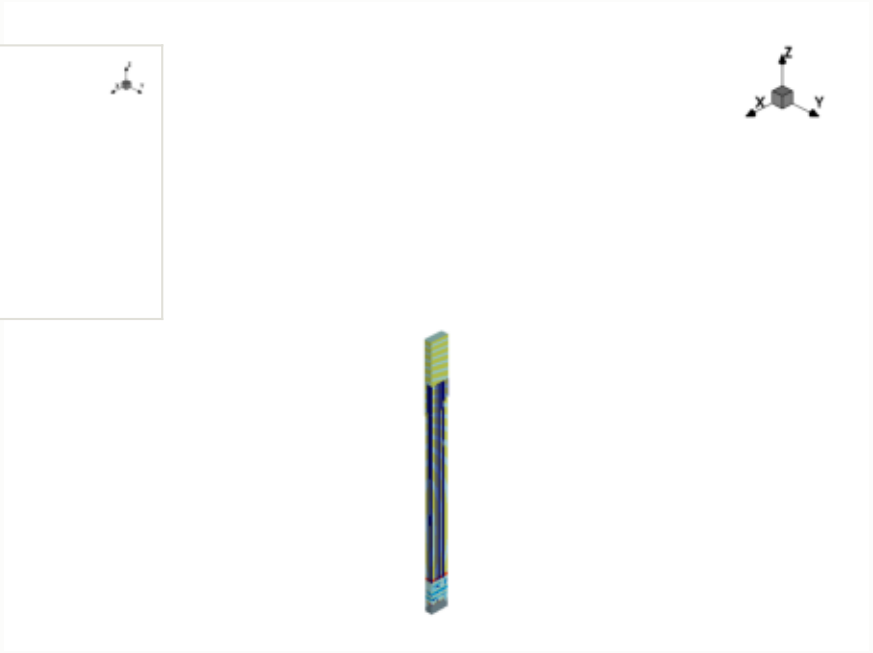

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

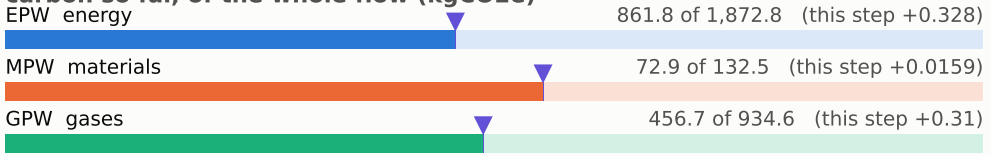

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

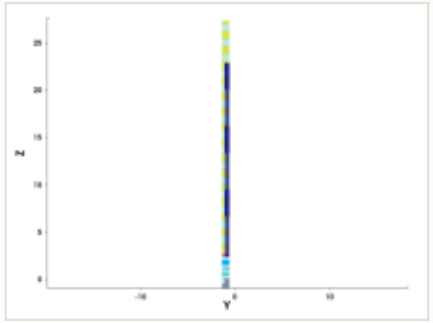

y cut at -1.035 µm

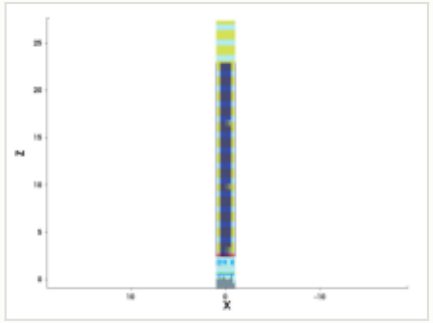

mask for this step

no mask for this step

steps by process area

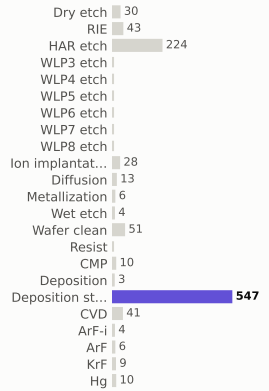

materials deposited (g)

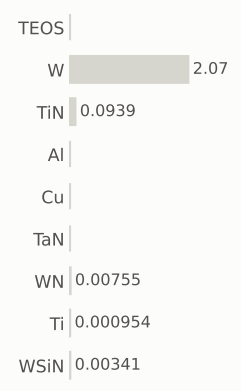

gases emitted (g)

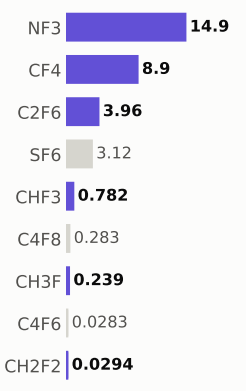

Step #13670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,392.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

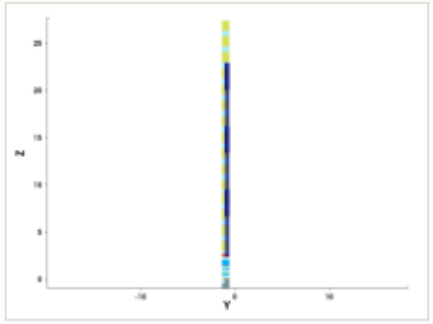

y cut at -1.035 µm

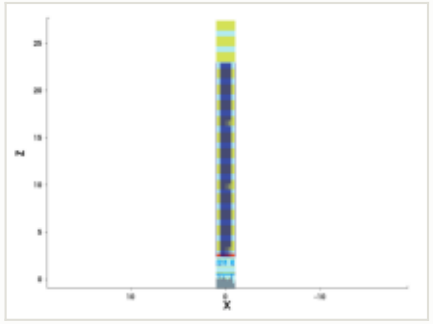

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 862.1 of 1,872.8 (this step +0.328)

MPW materials — 72.9 of 132.5 (this step +0.0159)

GPW gases — 457.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

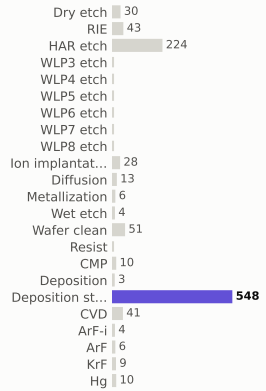

materials deposited (g)

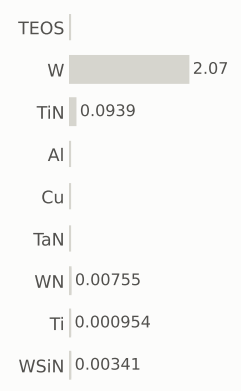

gases emitted (g)

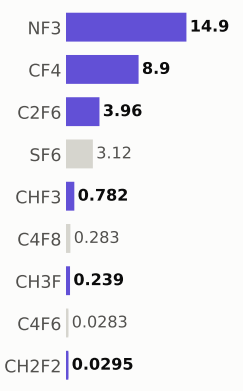

Step #13680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,392.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

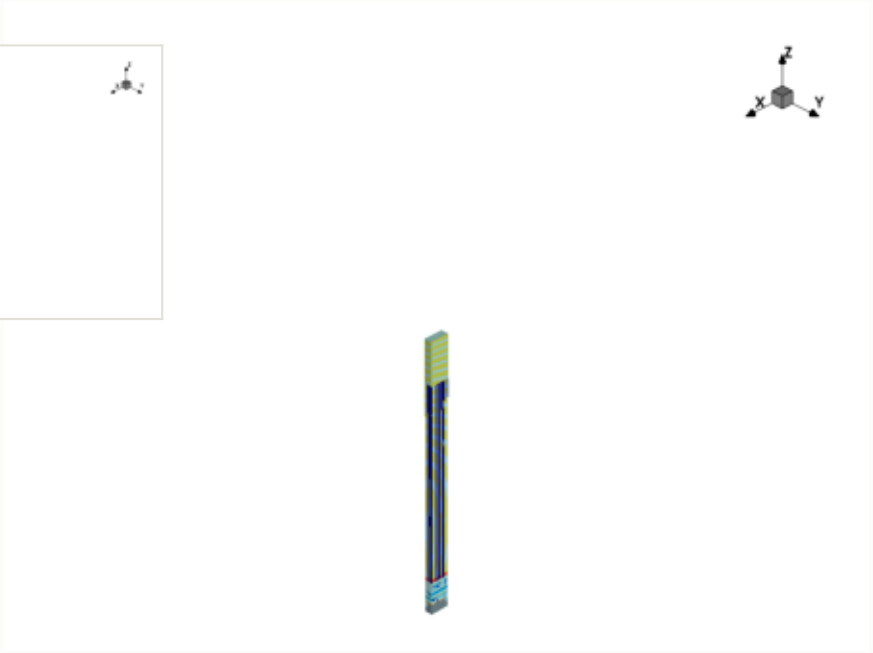

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

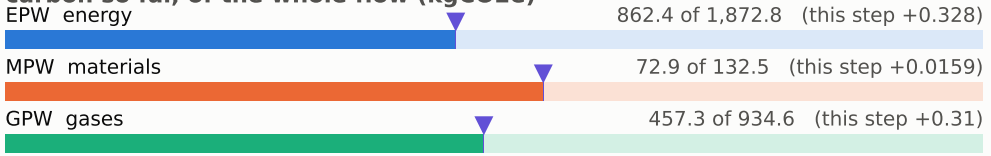

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

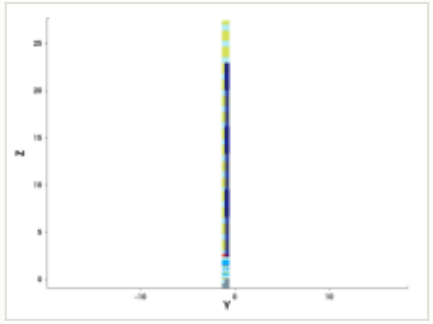

y cut at -1.035 µm

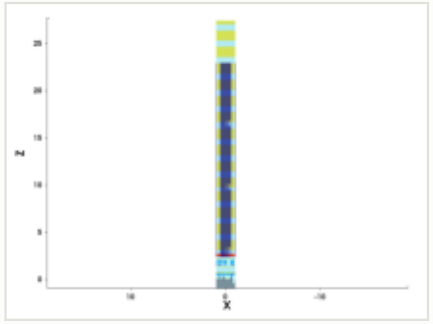

mask for this step

no mask for this step

steps by process area

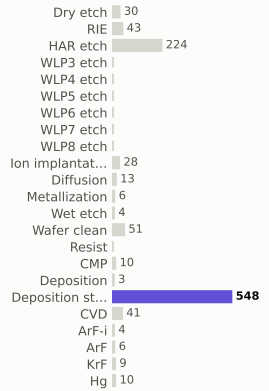

materials deposited (g)

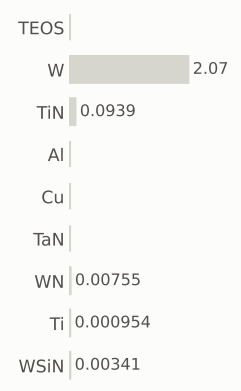

gases emitted (g)

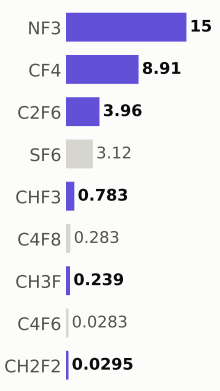

Step #13690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,393.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

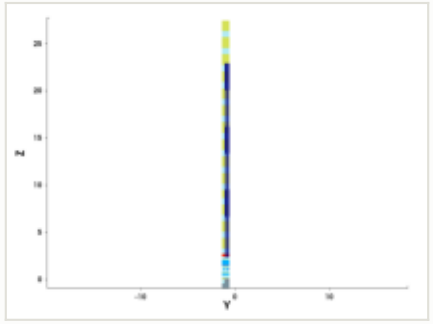

y cut at -1.035 µm

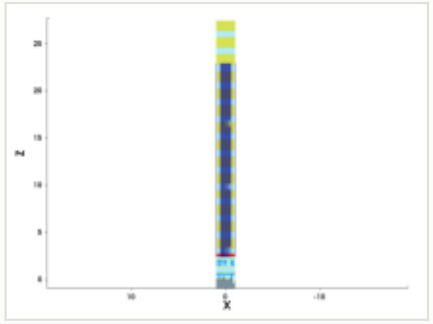

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 862.8 of 1,872.8 (this step +0.328)

MPW materials — 72.9 of 132.5 (this step +0.0159)

GPW gases — 457.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

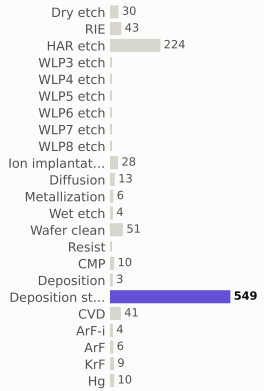

materials deposited (g)

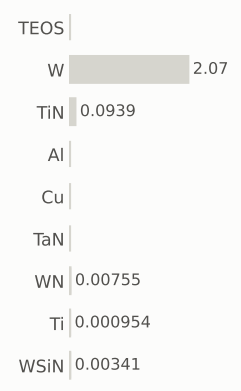

gases emitted (g)

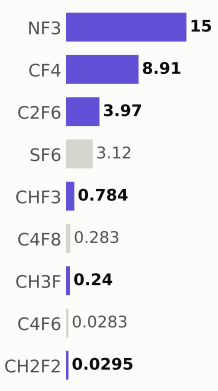

Step #13700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,393.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

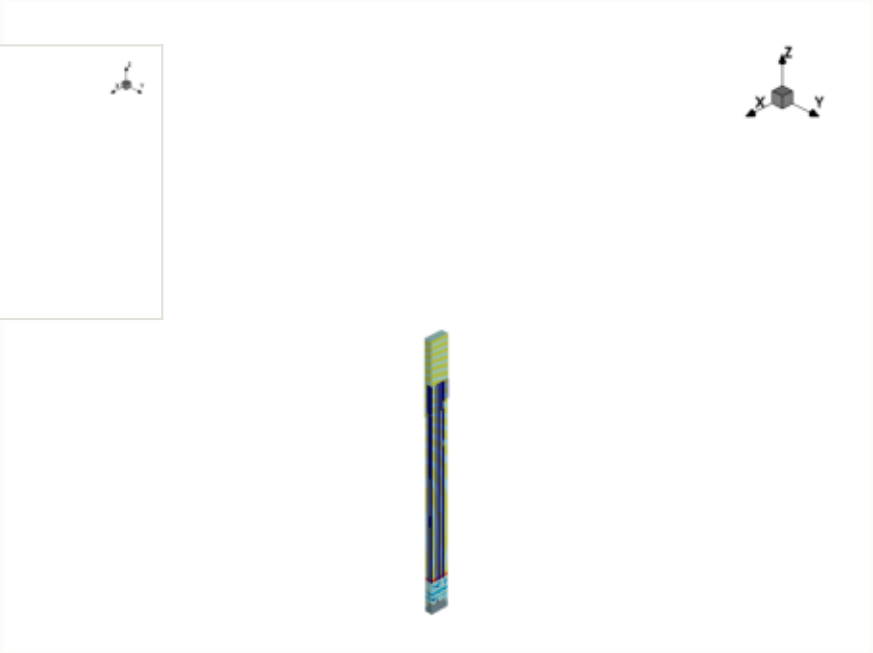

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

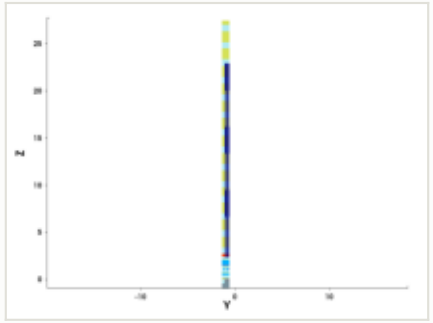

y cut at -1.035 µm

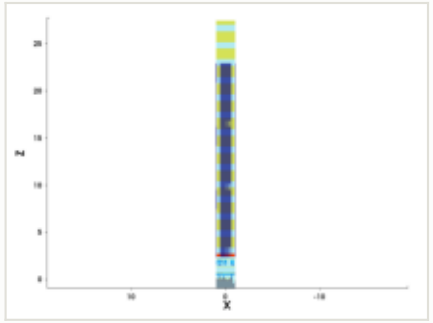

mask for this step

no mask for this step

steps by process area

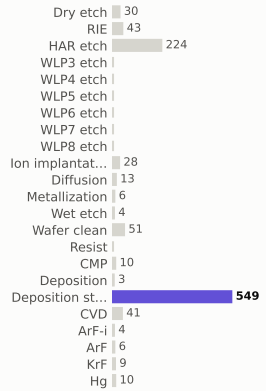

materials deposited (g)

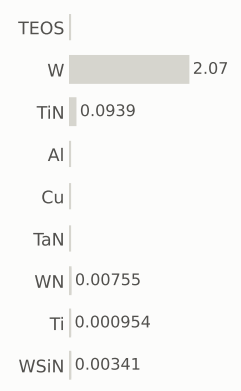

gases emitted (g)

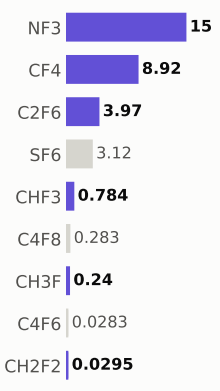

Step #13710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,394.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

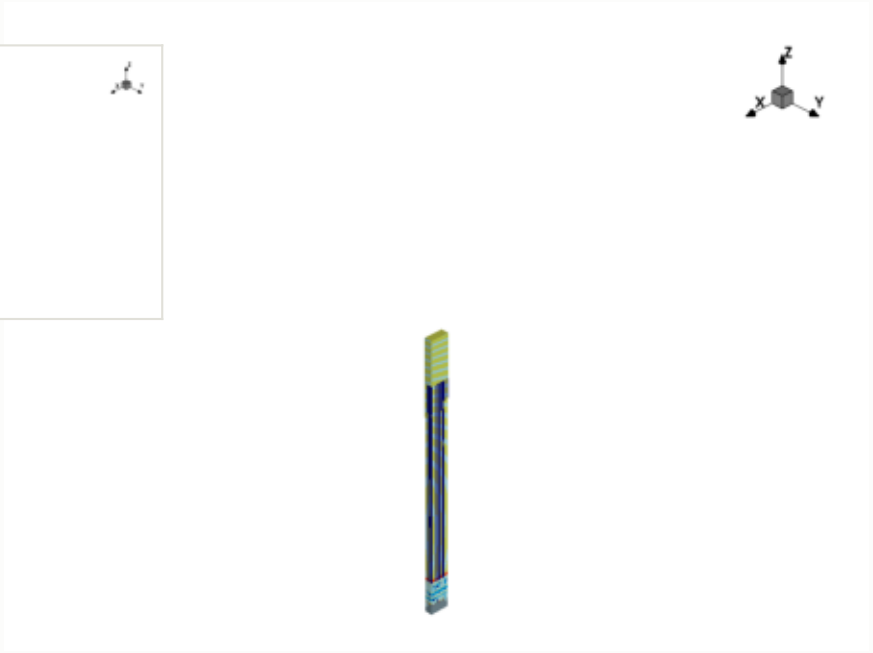

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

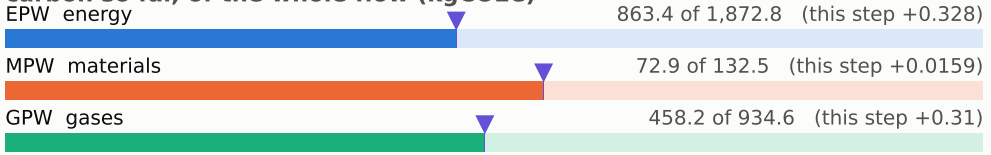

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

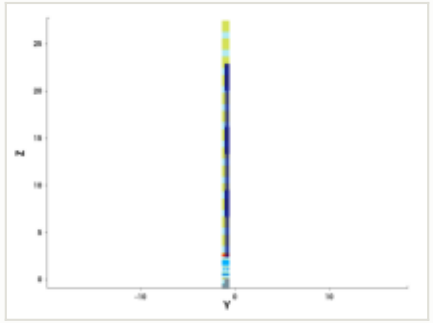

y cut at -1.035 µm

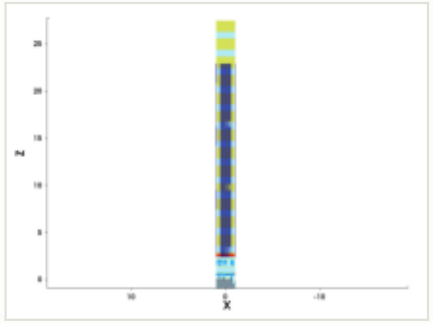

mask for this step

no mask for this step

steps by process area

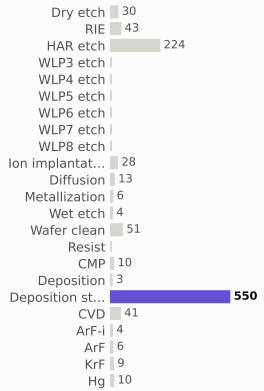

materials deposited (g)

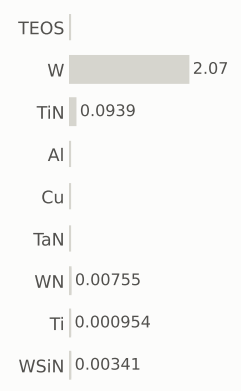

gases emitted (g)

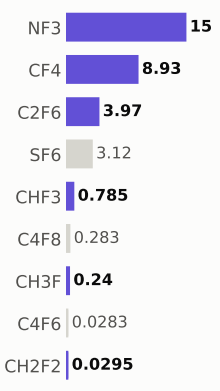

Step #13720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,395.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

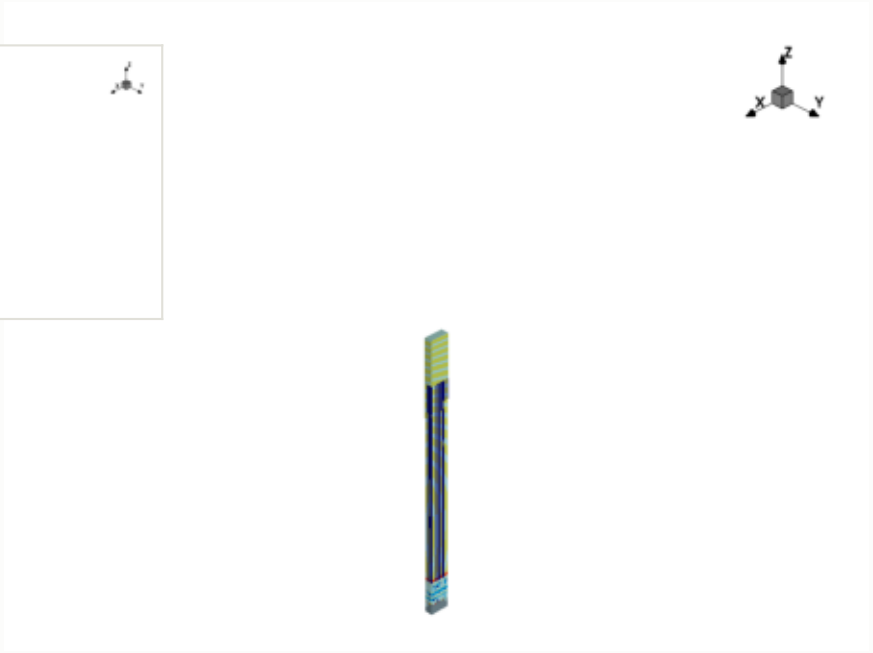

x cut at 0.000 µm

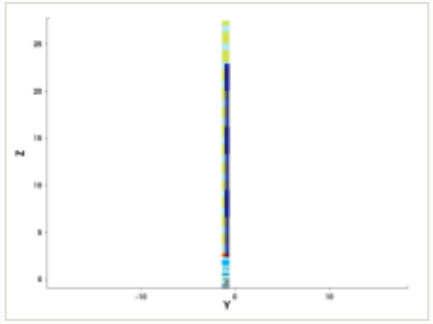

y cut at -1.035 µm

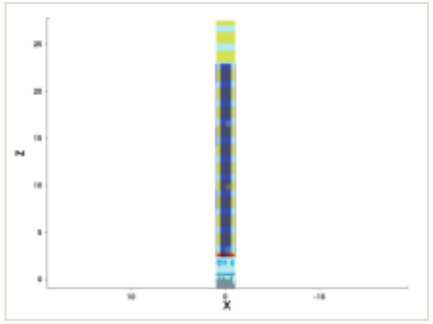

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

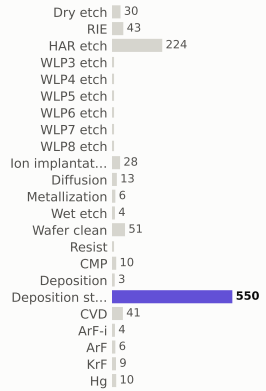

materials deposited (g)

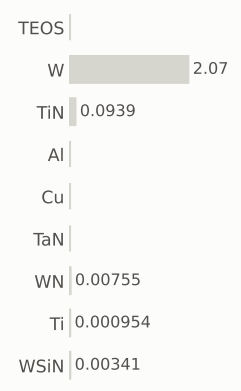

gases emitted (g)

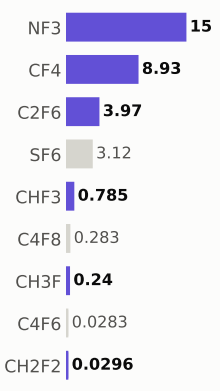

Step #13730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,395.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

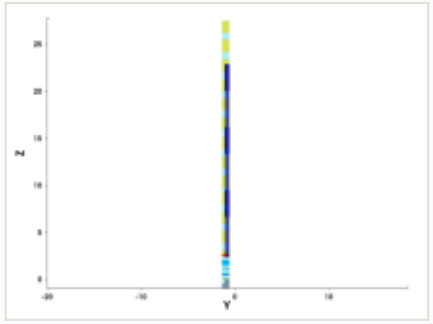

y cut at -1.035 µm

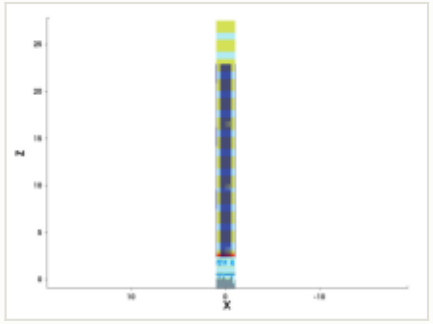

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

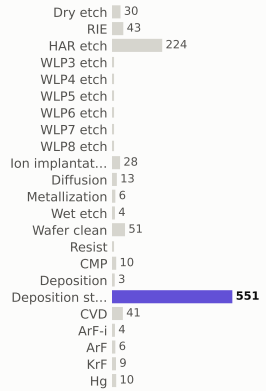

materials deposited (g)

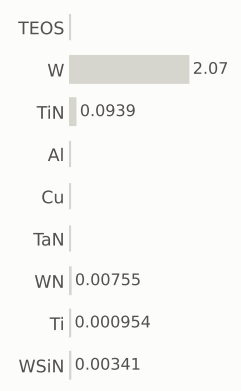

gases emitted (g)

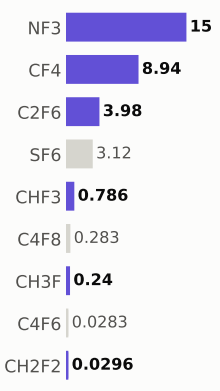

Step #13740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,396.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

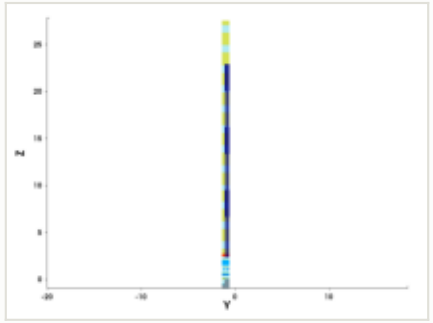

y cut at -1.035 µm

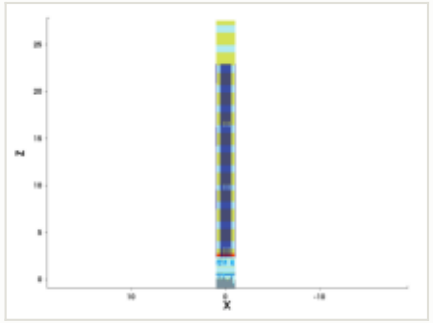

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

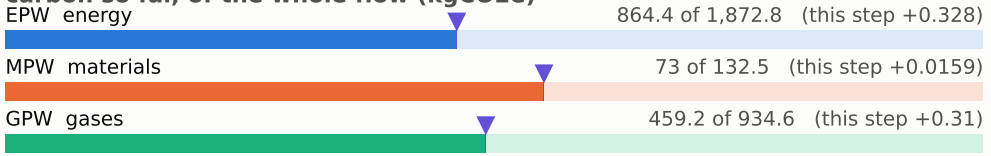

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

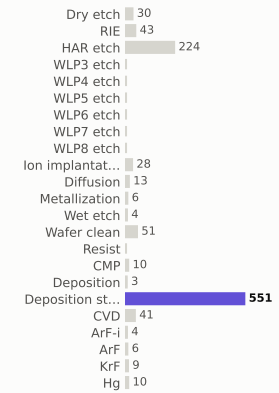

materials deposited (g)

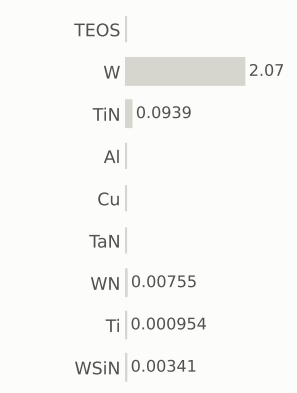

gases emitted (g)

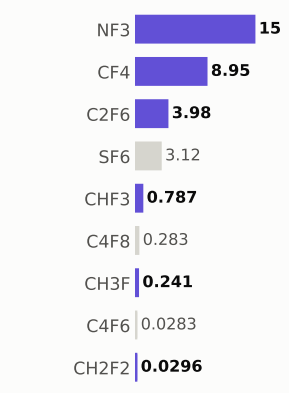

Step #13750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,397.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

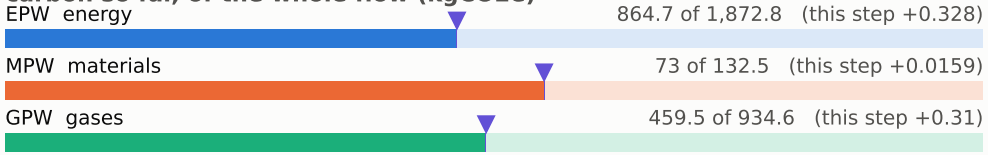

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

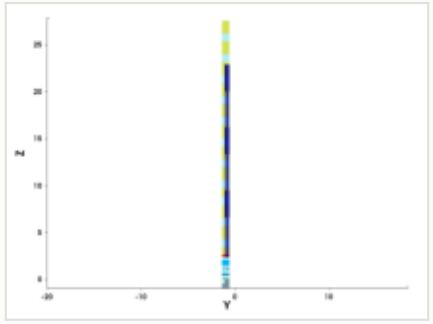

y cut at -1.035 µm

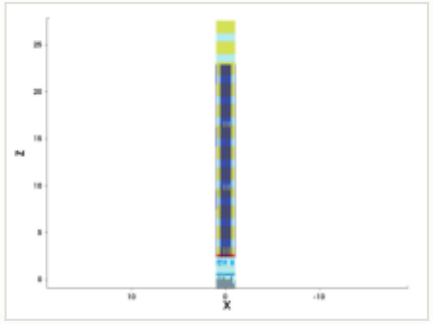

mask for this step

no mask for this step

steps by process area

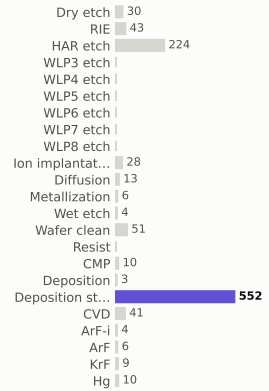

materials deposited (g)

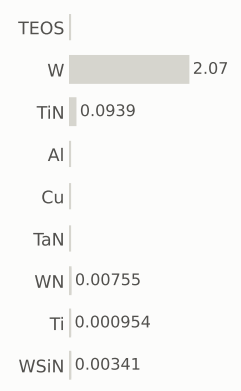

gases emitted (g)

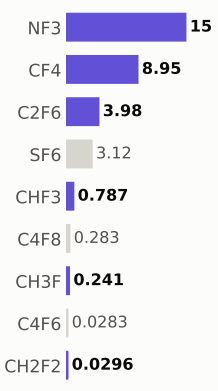

Step #13760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,397.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

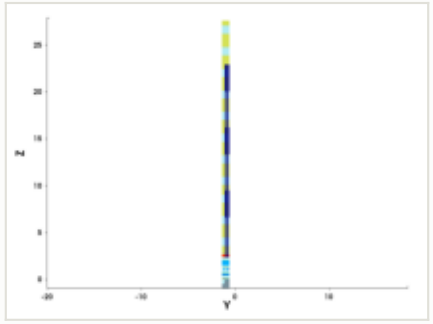

y cut at -1.035 µm

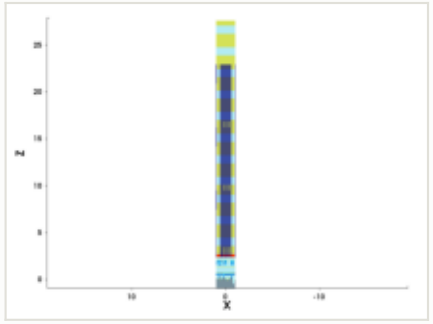

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

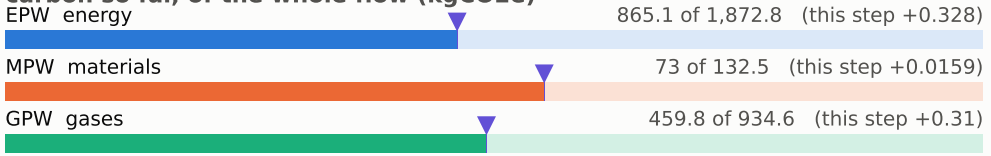

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

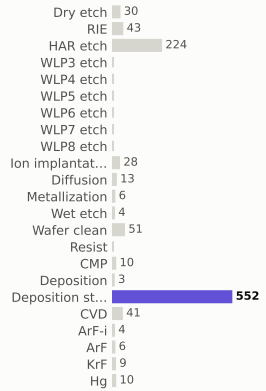

materials deposited (g)

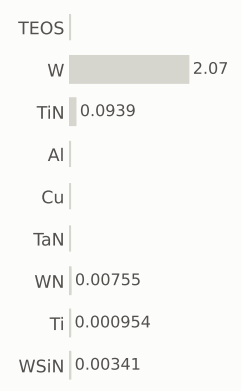

gases emitted (g)

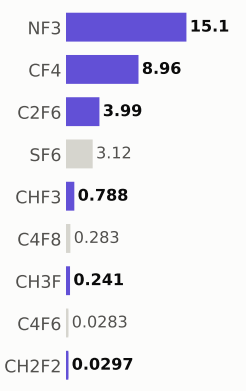

Step #13770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,398.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

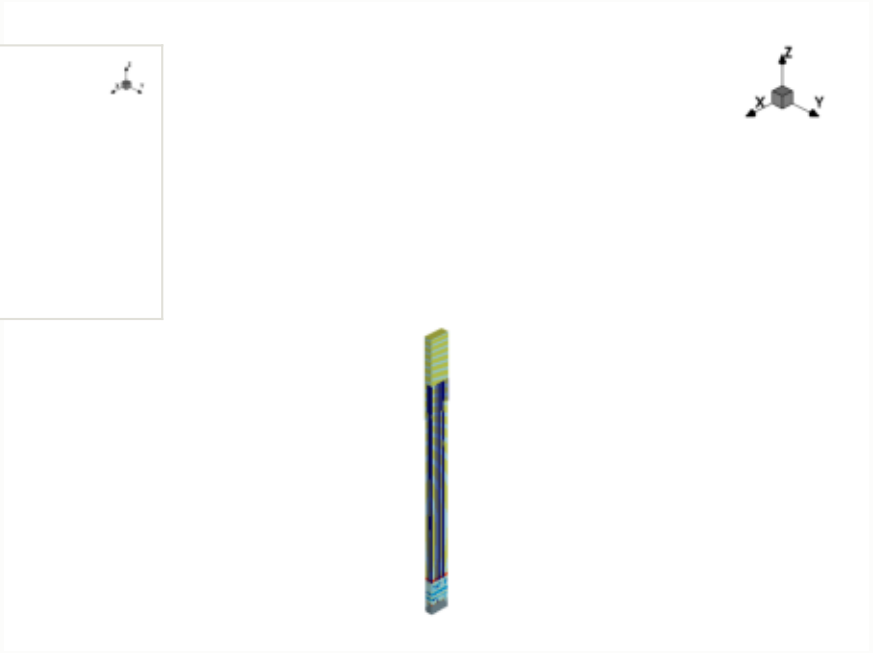

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

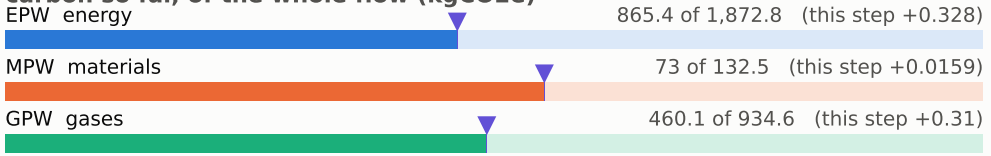

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

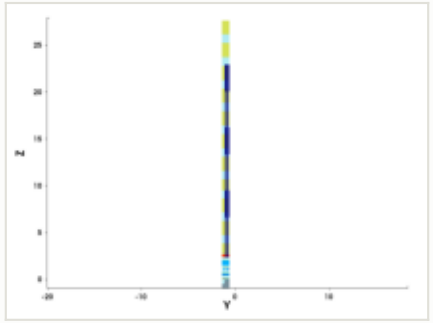

y cut at -1.035 µm

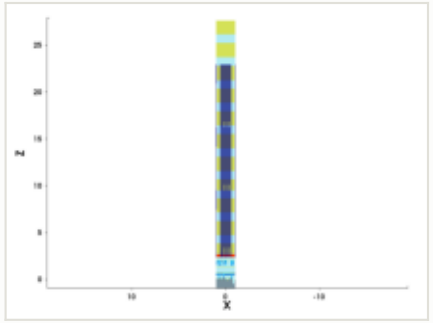

mask for this step

no mask for this step

steps by process area

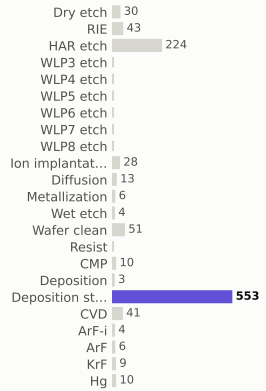

materials deposited (g)

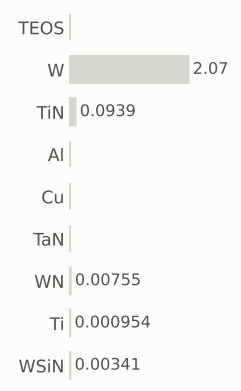

gases emitted (g)

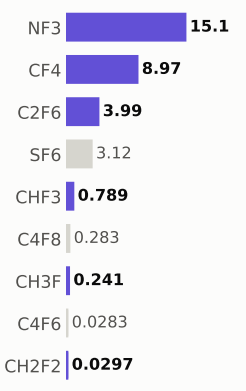

Step #13780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,399.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

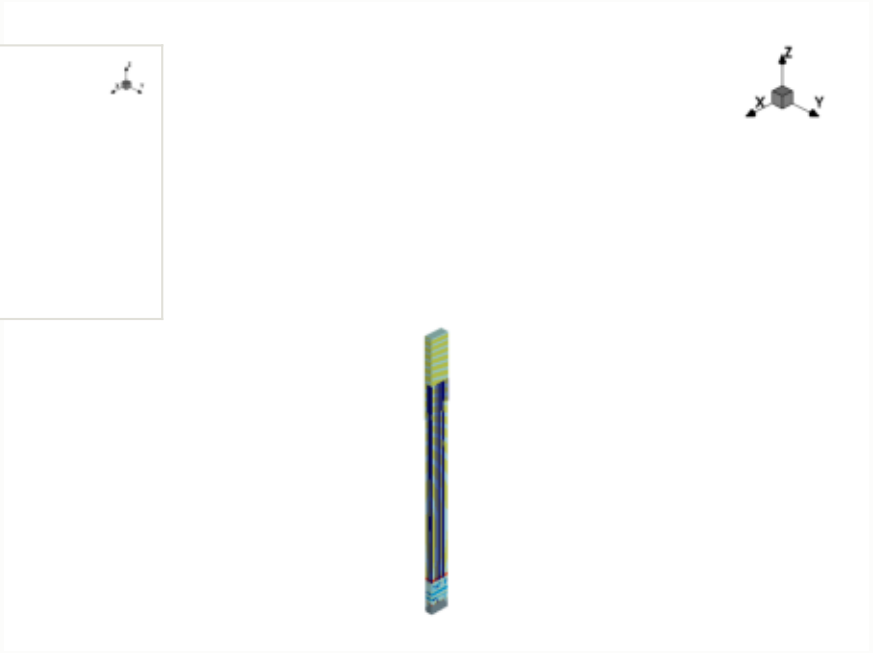

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

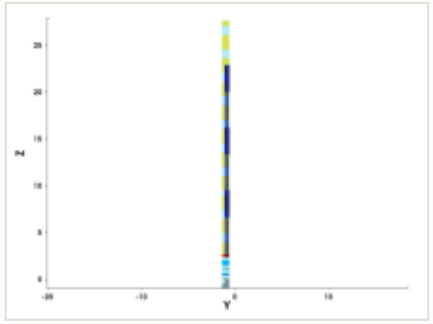

y cut at -1.035 µm

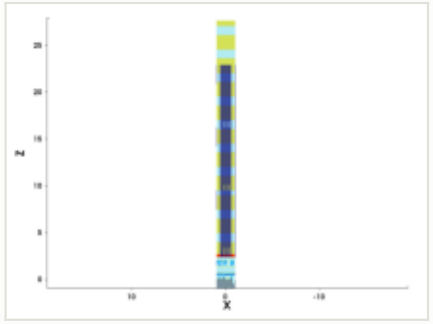

mask for this step

no mask for this step

steps by process area

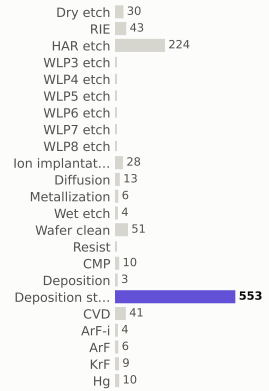

materials deposited (g)

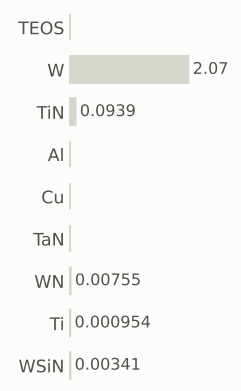

gases emitted (g)

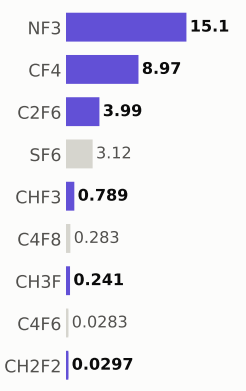

Step #13790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,399.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

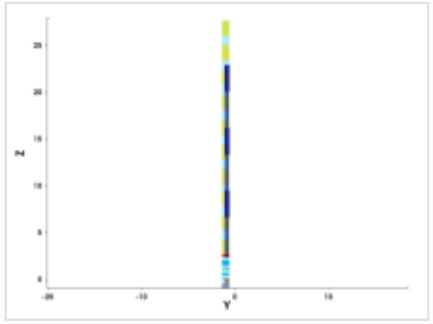

y cut at -1.035 µm

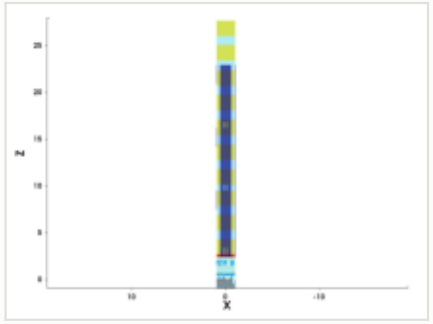

mask for this step

no mask for this step

steps by process area

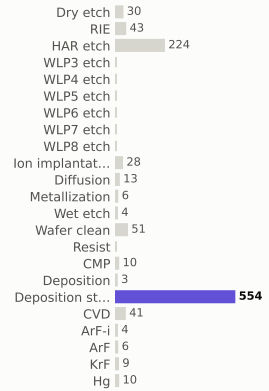

materials deposited (g)

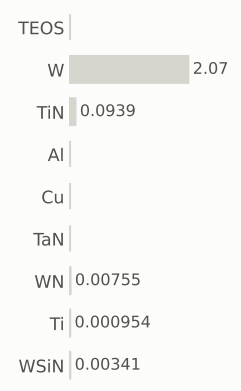

gases emitted (g)

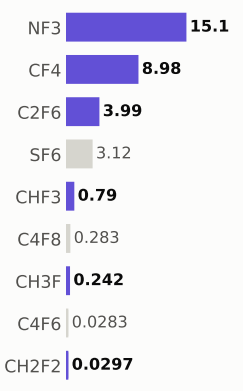

Step #13800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,400.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

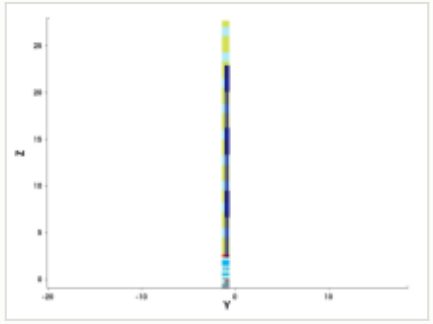

y cut at -1.035 µm

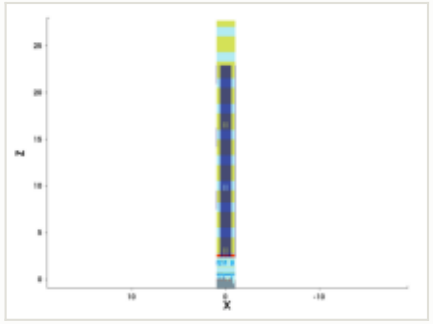

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

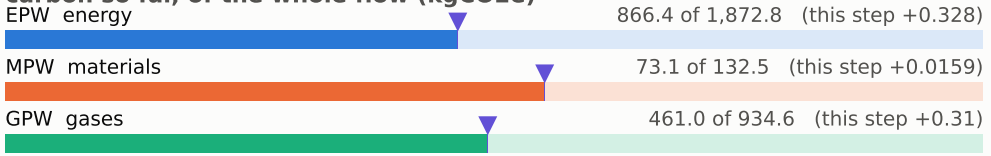

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

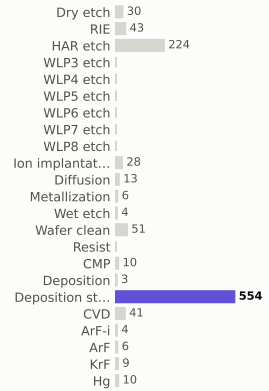

materials deposited (g)

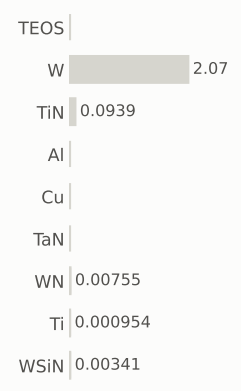

gases emitted (g)

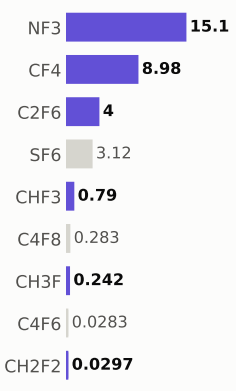

Step #13810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,401.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

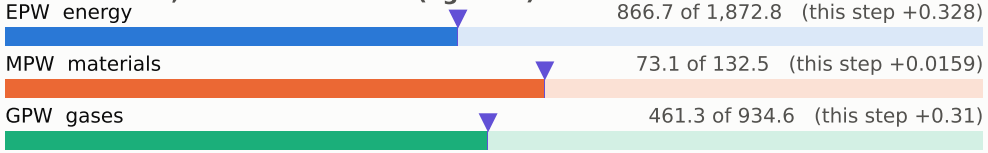

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

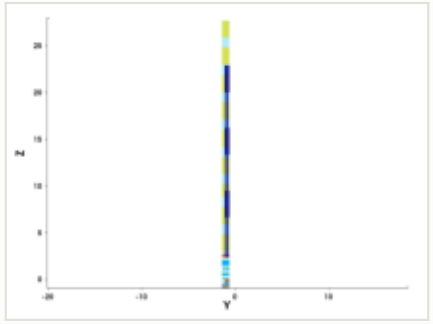

y cut at -1.035 µm

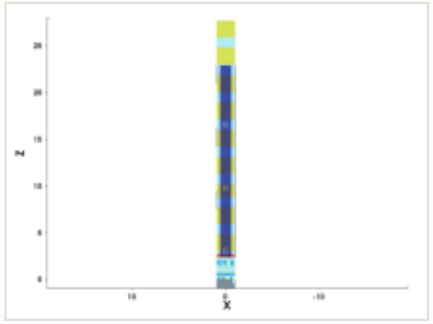

mask for this step

no mask for this step

steps by process area

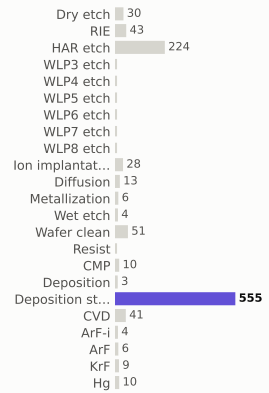

materials deposited (g)

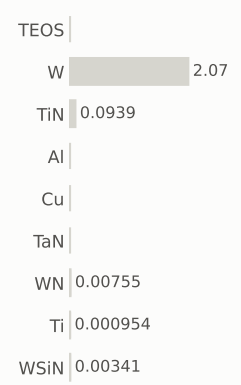

gases emitted (g)

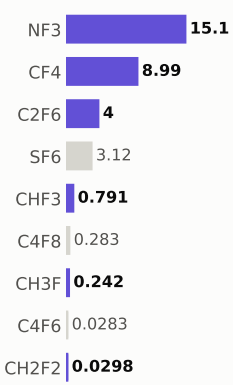

Step #13820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,401.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

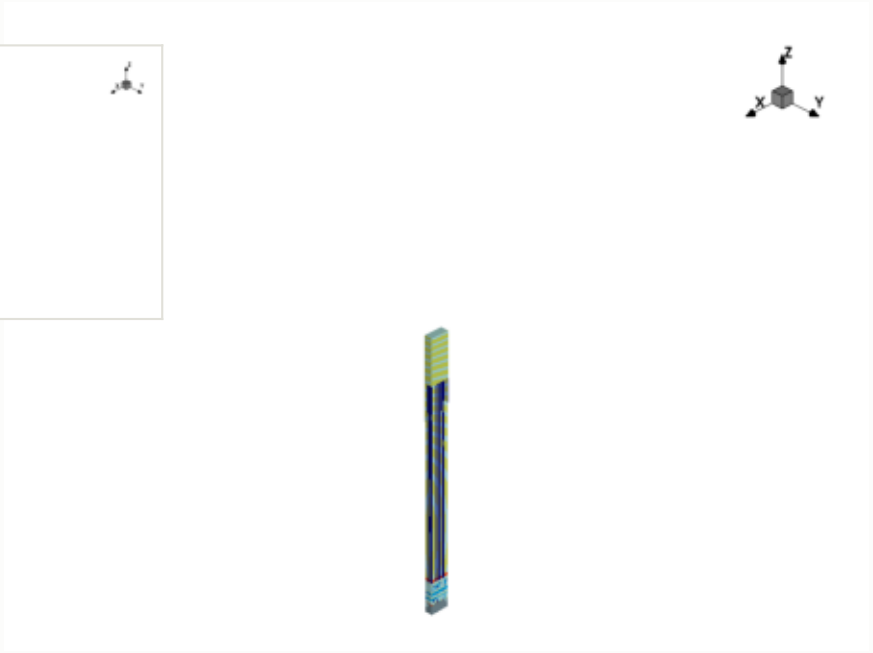

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

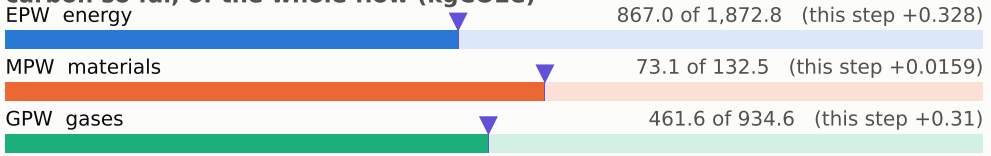

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

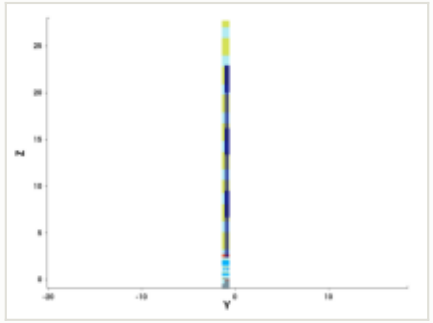

y cut at -1.035 µm

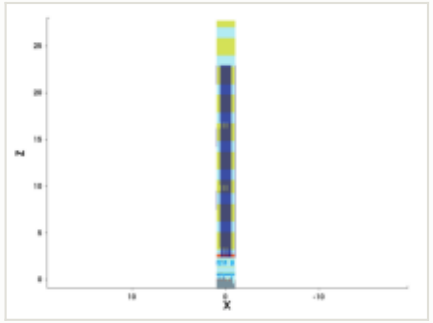

mask for this step

no mask for this step

steps by process area

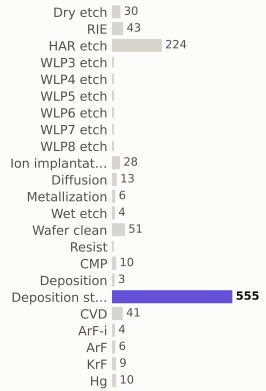

materials deposited (g)

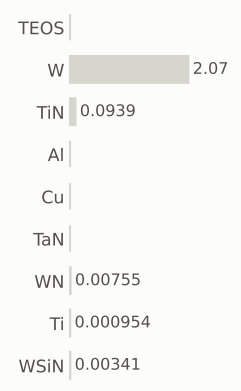

gases emitted (g)



Step #13830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,402.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

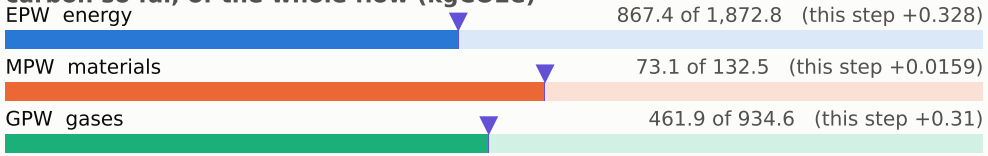

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

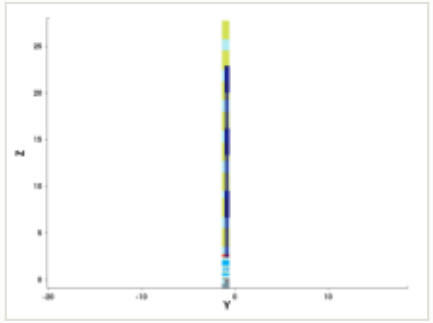

y cut at -1.035 µm

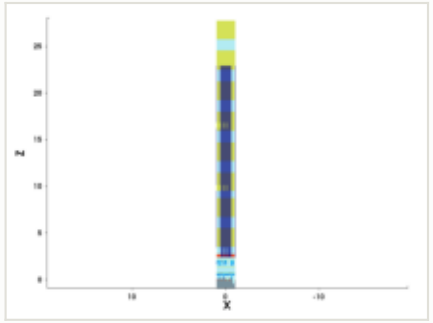

mask for this step

no mask for this step

steps by process area

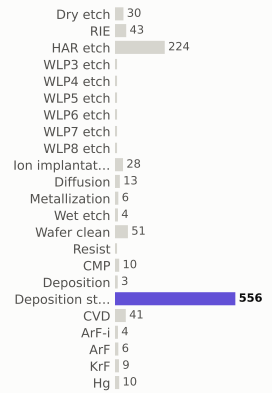

materials deposited (g)

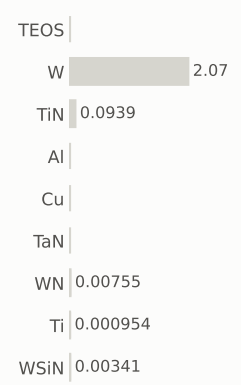

gases emitted (g)

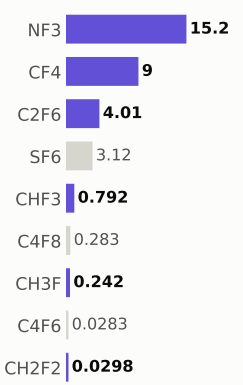

Step #13840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,403.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

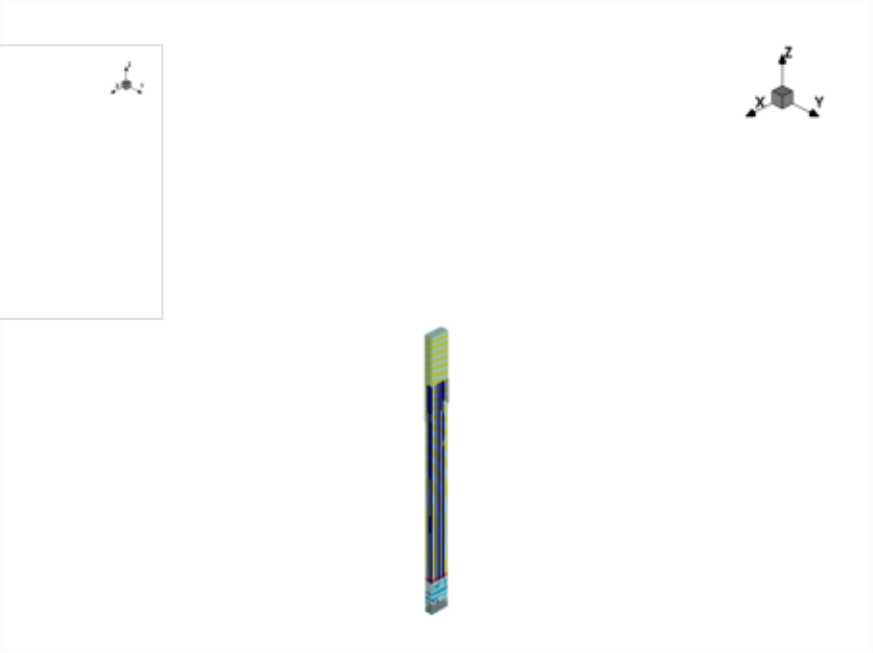

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

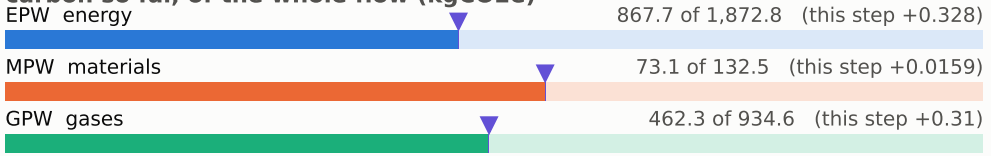

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

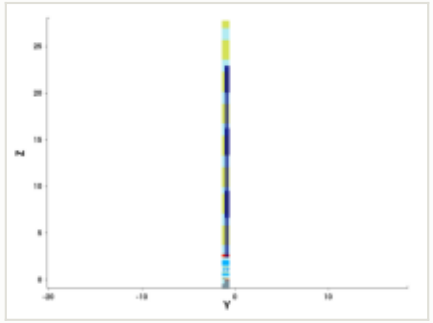

y cut at -1.035 µm

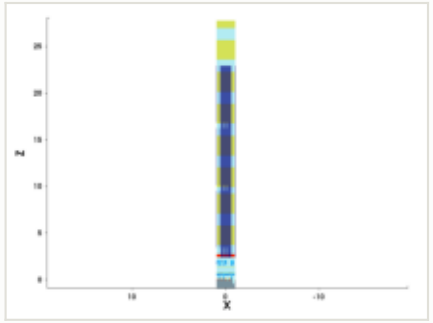

mask for this step

no mask for this step

steps by process area

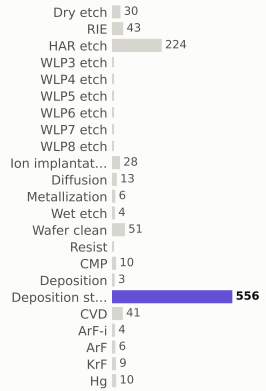

materials deposited (g)

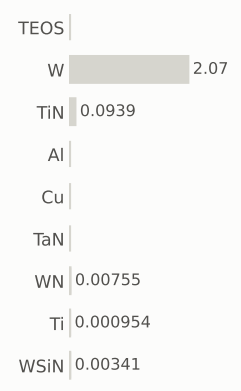

gases emitted (g)

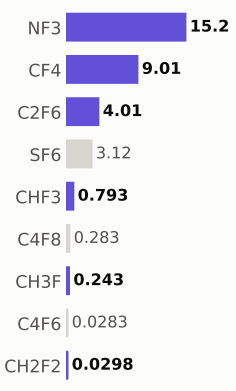

Step #13850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,403.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

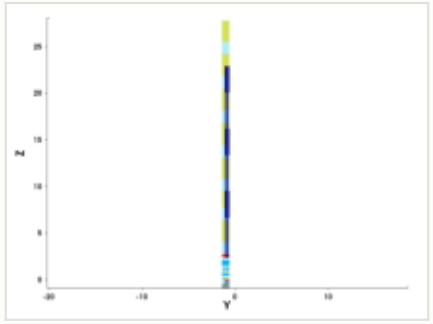

y cut at -1.035 µm

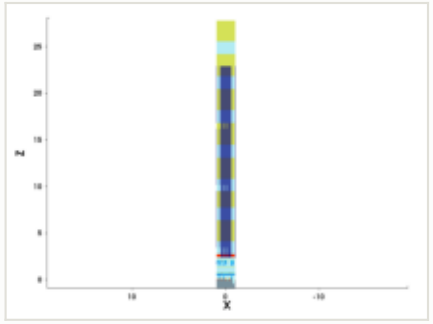

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

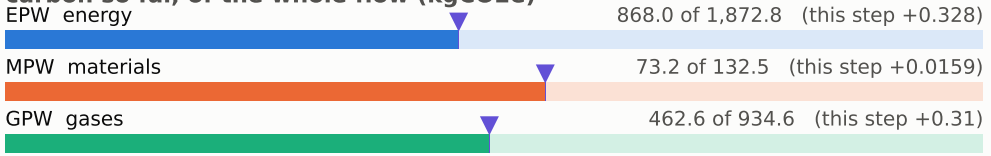

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

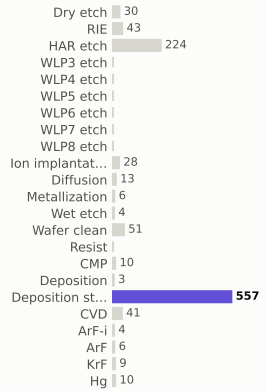

materials deposited (g)

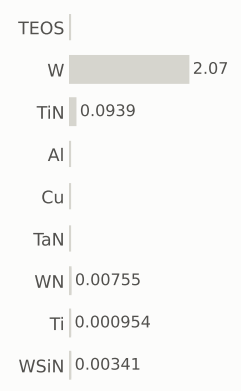

gases emitted (g)

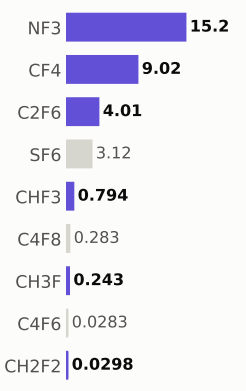

Step #13860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,404.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

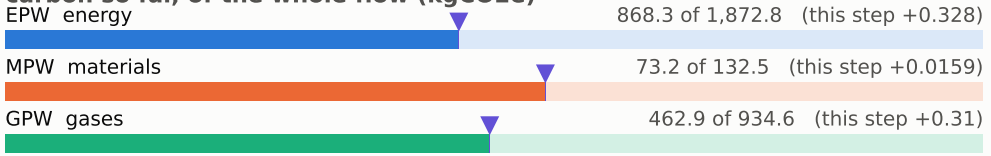

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

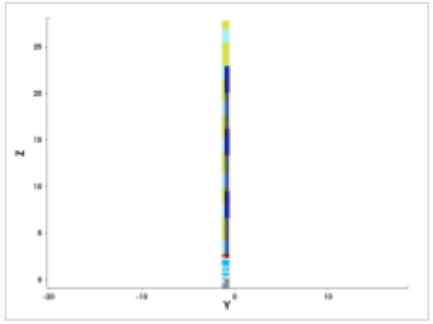

y cut at -1.035 µm

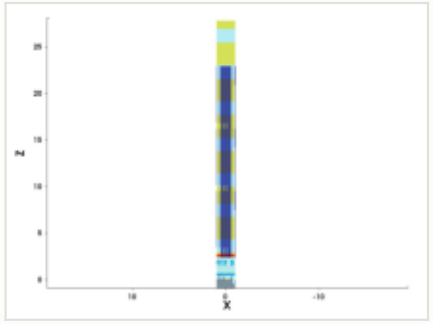

mask for this step

no mask for this step

steps by process area

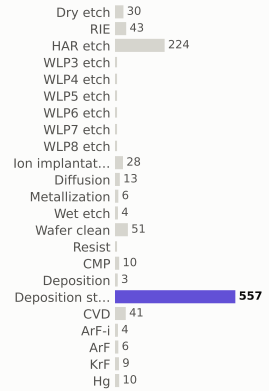

materials deposited (g)

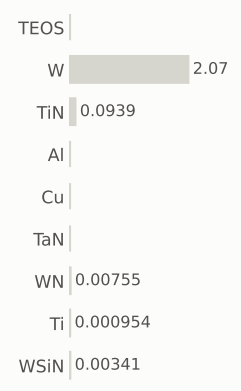

gases emitted (g)

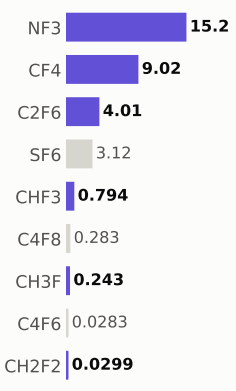

Step #13870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,405.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

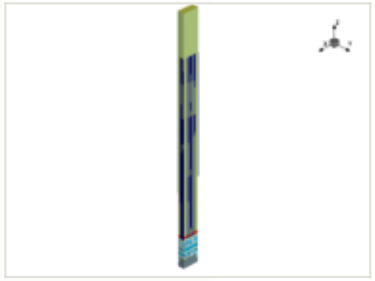

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

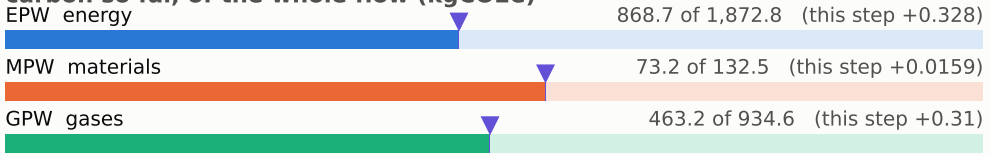

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

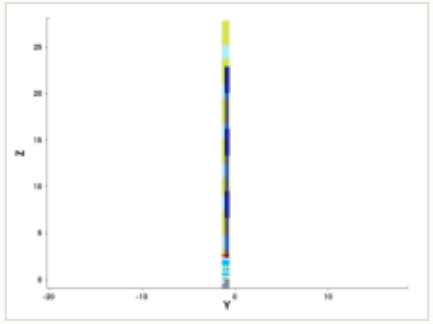

y cut at -1.035 µm

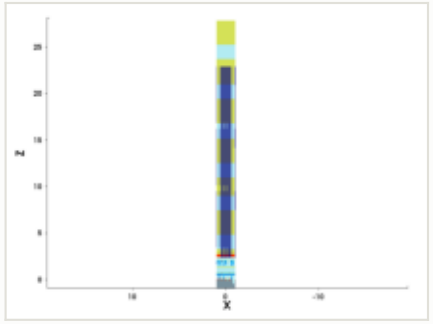

mask for this step

no mask for this step

steps by process area

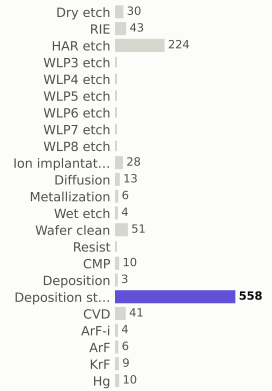

materials deposited (g)

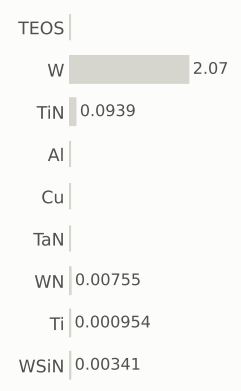

gases emitted (g)

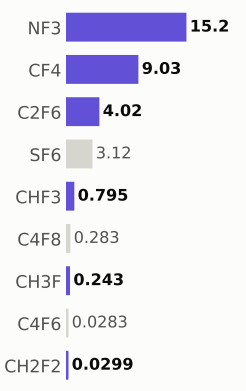

Step #13880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,405.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

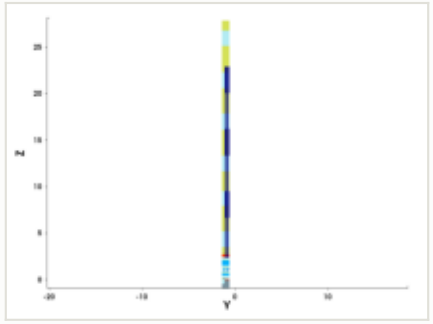

y cut at -1.035 µm

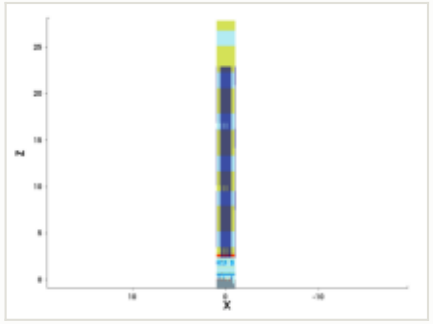

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 869.0 of 1,872.8 (this step +0.328)

MPW materials — 73.2 of 132.5 (this step +0.0159)

GPW gases — 463.5 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

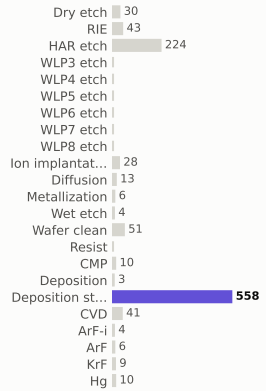

materials deposited (g)

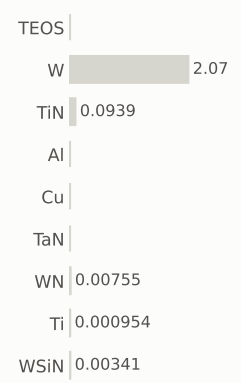

gases emitted (g)

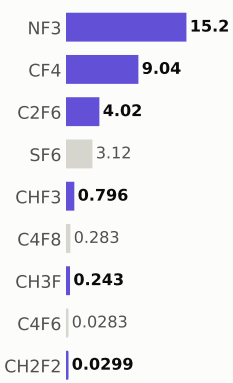

Step #13890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,406.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

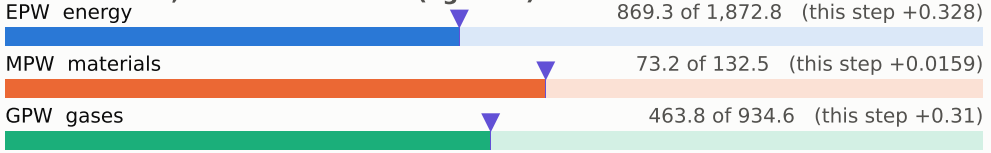

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

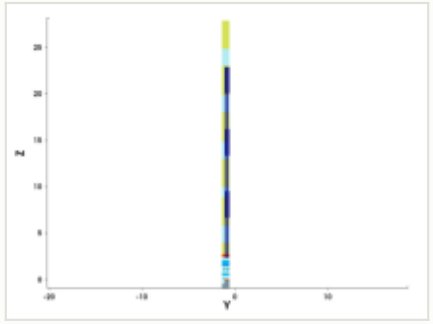

y cut at -1.035 µm

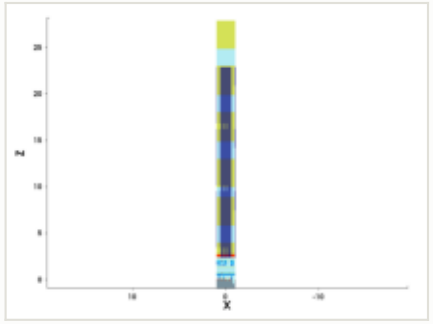

mask for this step

no mask for this step

steps by process area

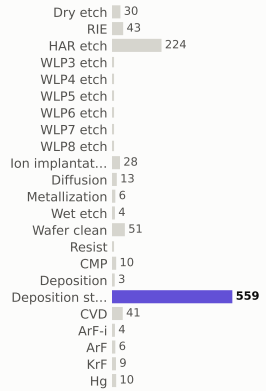

materials deposited (g)

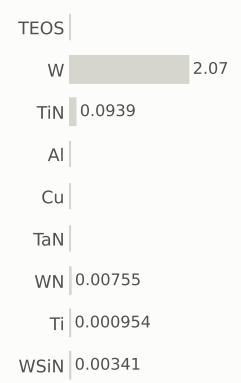

gases emitted (g)

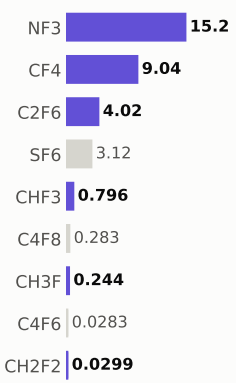

Step #13900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,407.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

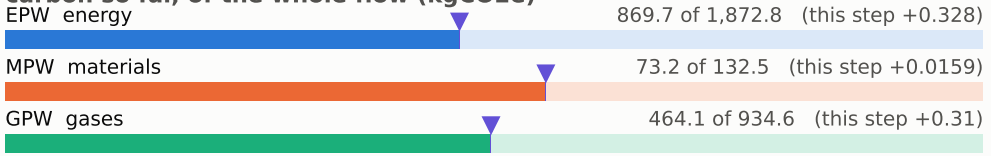

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

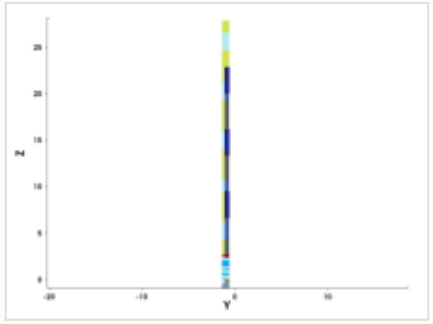

y cut at -1.035 µm

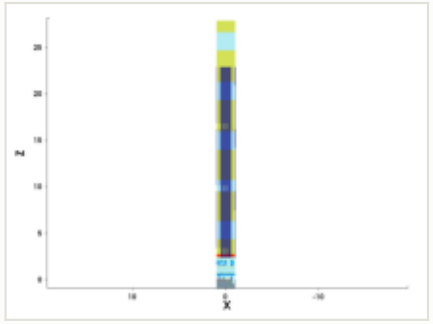

mask for this step

no mask for this step

steps by process area

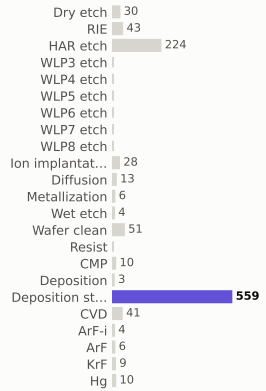

materials deposited (g)

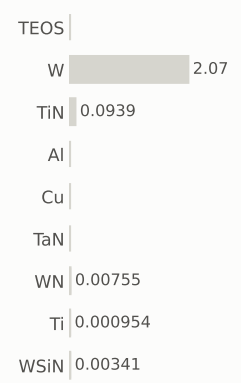

gases emitted (g)

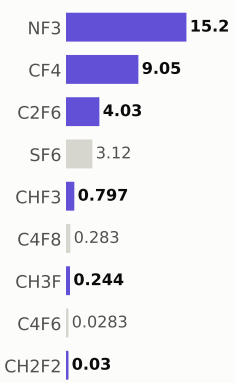

Step #13910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,407.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

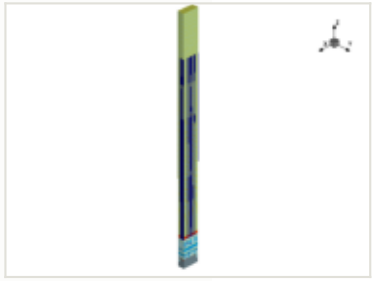

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

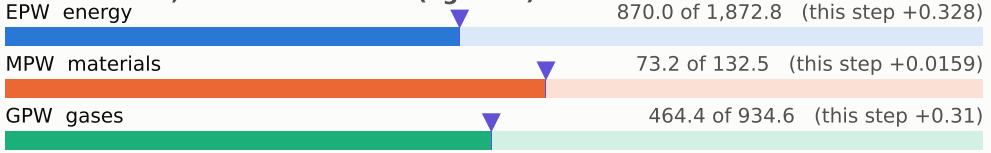

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

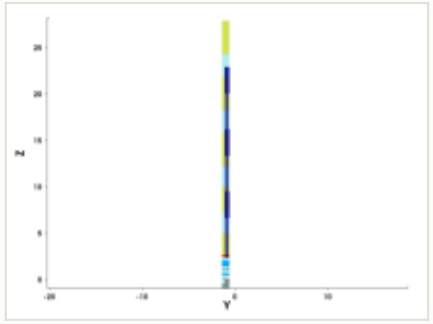

y cut at -1.035 µm

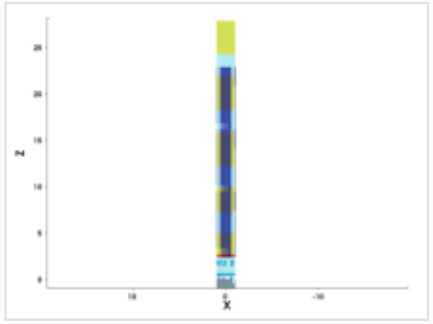

mask for this step

no mask for this step

steps by process area

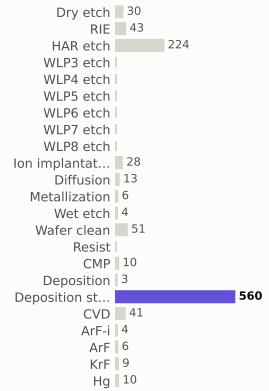

materials deposited (g)

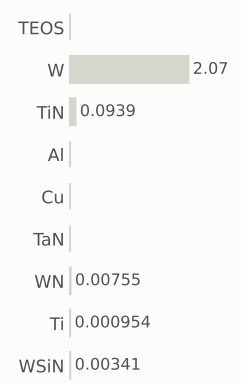

gases emitted (g)

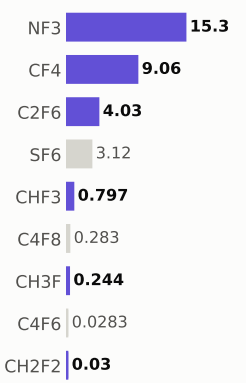

Step #13920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,408.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

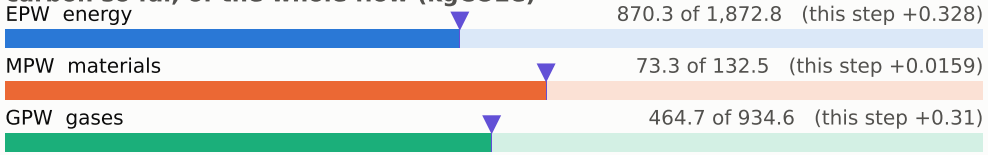

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

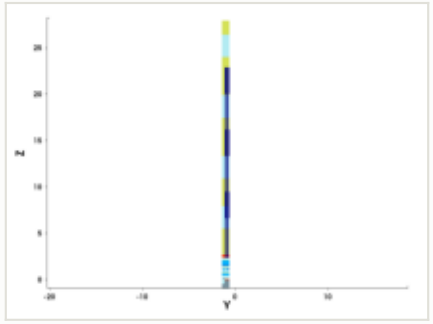

y cut at -1.035 µm

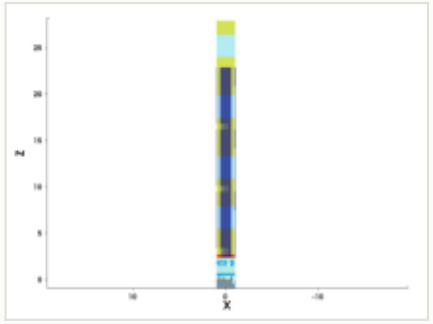

mask for this step

no mask for this step

steps by process area

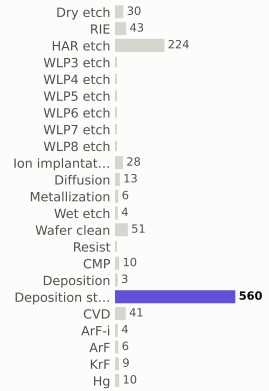

materials deposited (g)

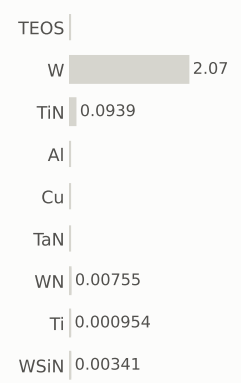

gases emitted (g)

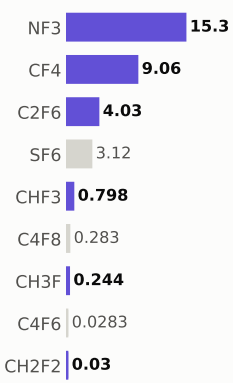

Step #13930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,409.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

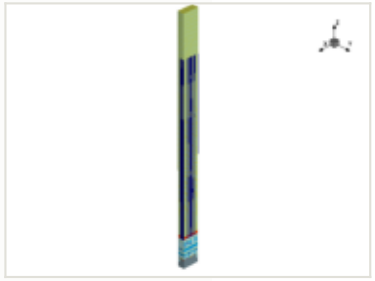

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

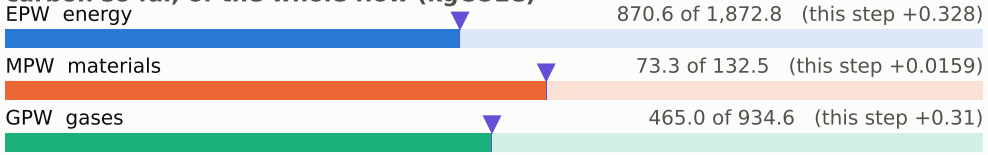

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

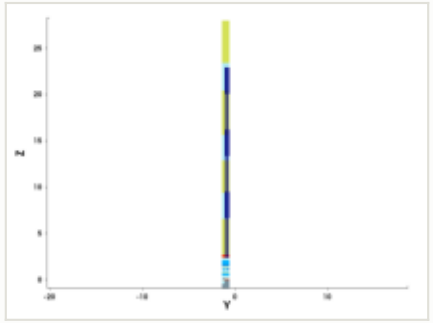

y cut at -1.035 µm

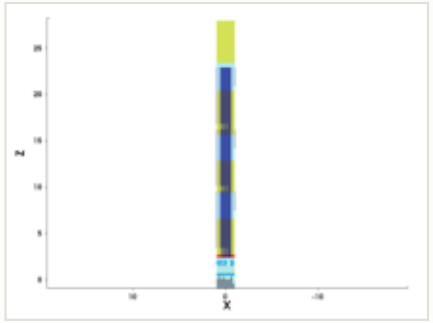

mask for this step

no mask for this step

steps by process area

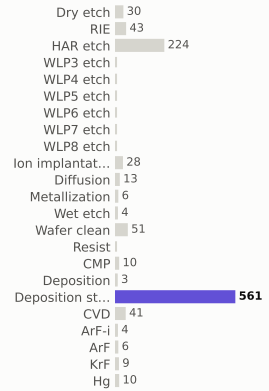

materials deposited (g)

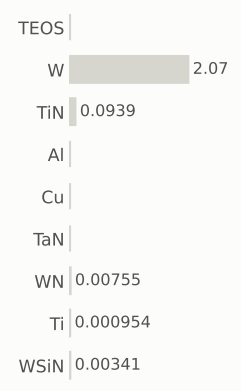

gases emitted (g)

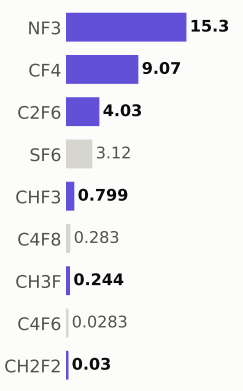

Step #13940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,409.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

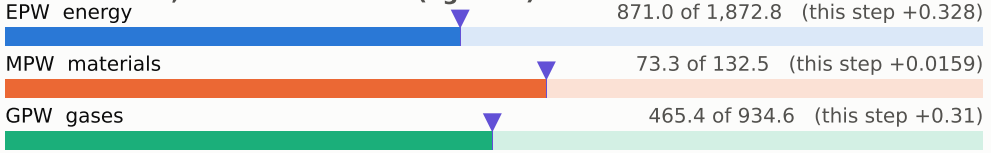

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

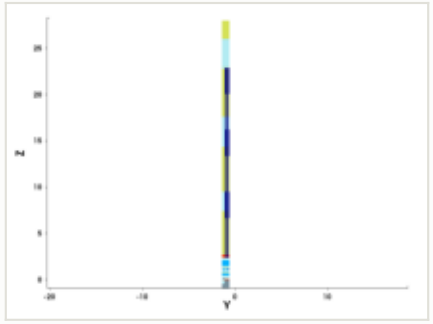

y cut at -1.035 µm

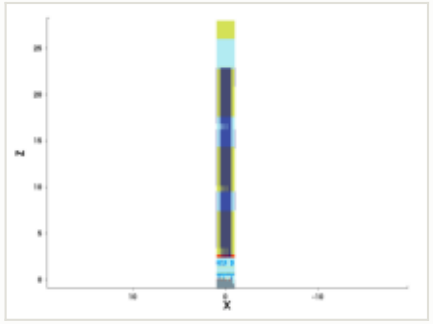

mask for this step

no mask for this step

steps by process area

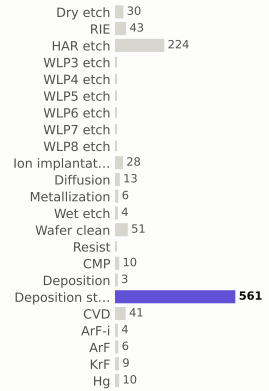

materials deposited (g)

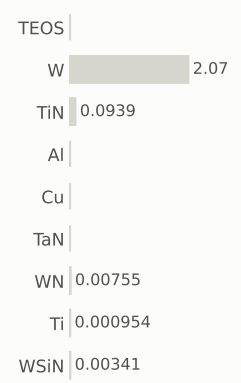

gases emitted (g)

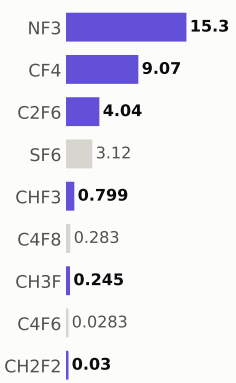

Step #13950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,410.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

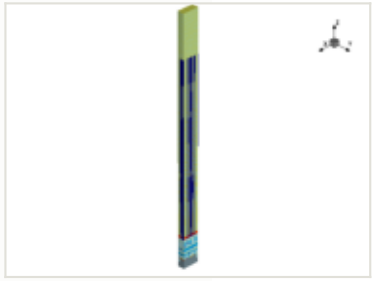

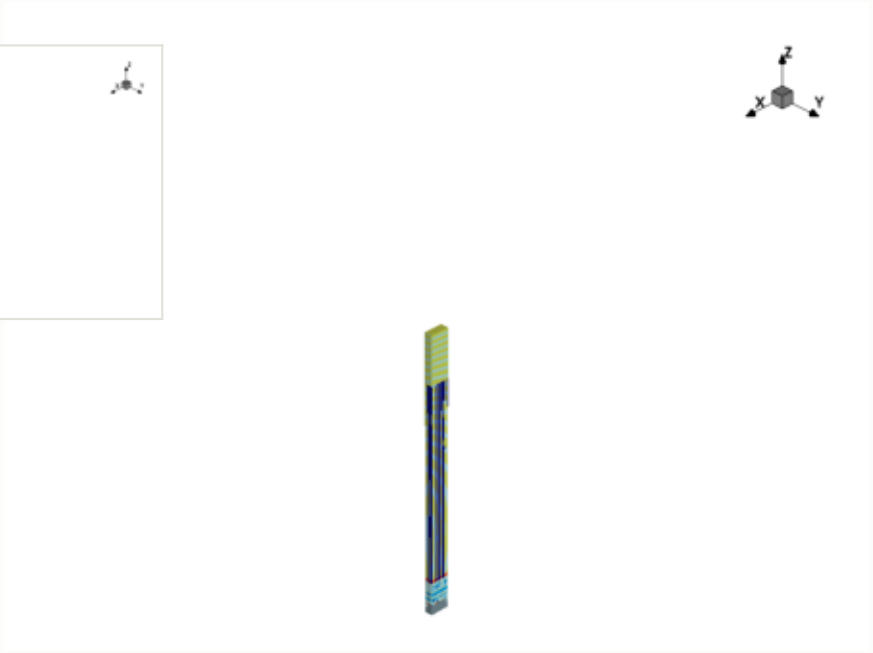

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

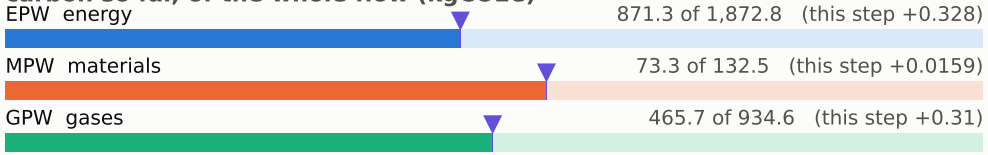

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

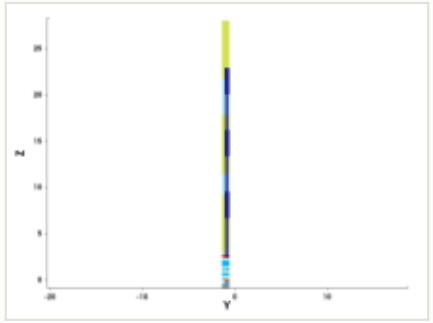

y cut at -1.035 µm

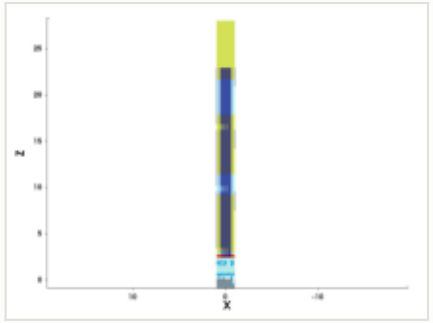

mask for this step

no mask for this step

steps by process area

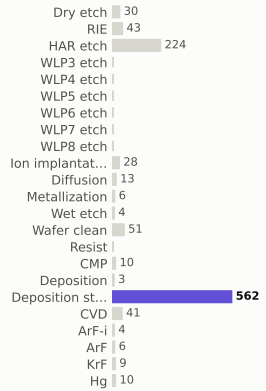

materials deposited (g)

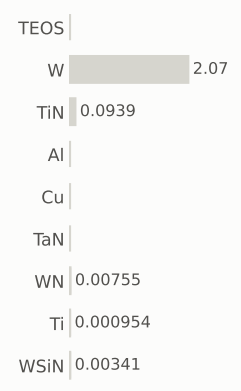

gases emitted (g)

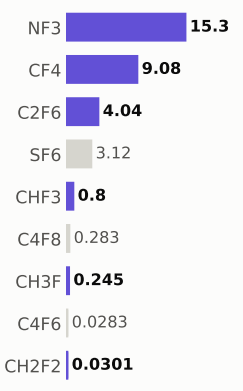

Step #13960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,410.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

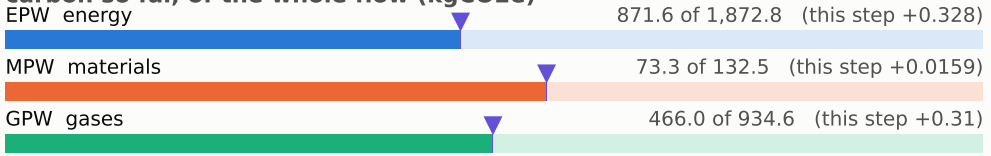

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

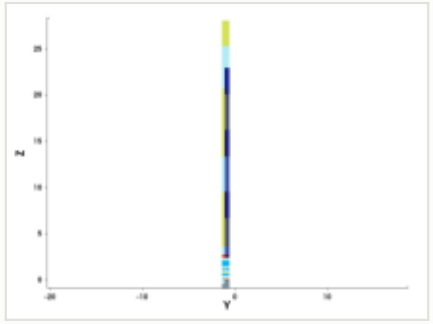

y cut at -1.035 µm

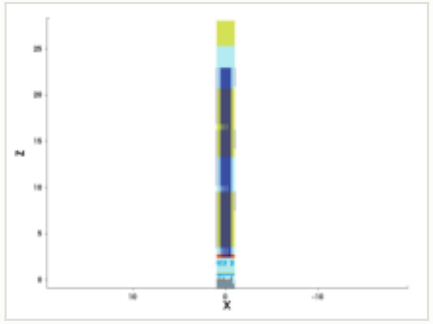

mask for this step

no mask for this step

steps by process area

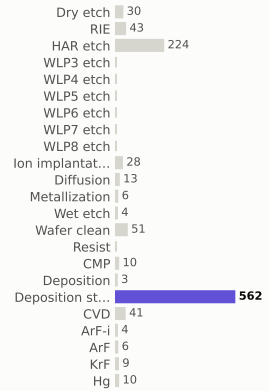

materials deposited (g)

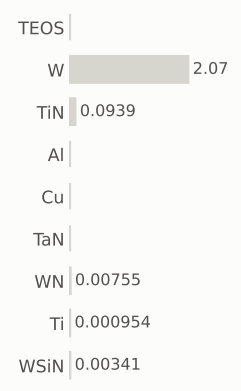

gases emitted (g)

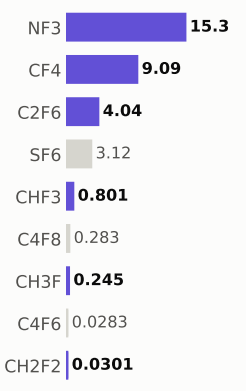

Step #13970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,411.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

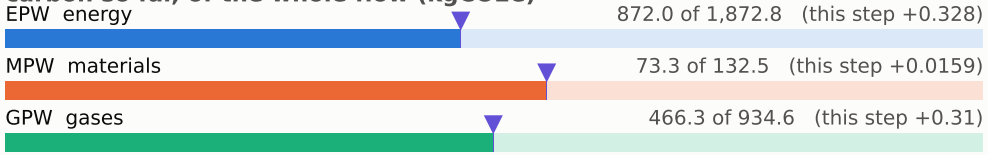

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

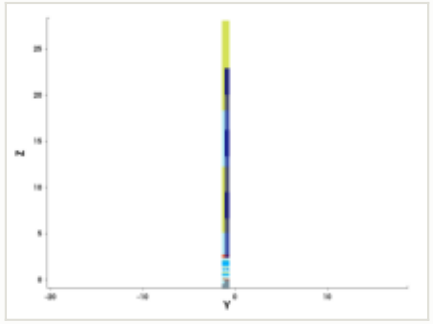

y cut at -1.035 µm

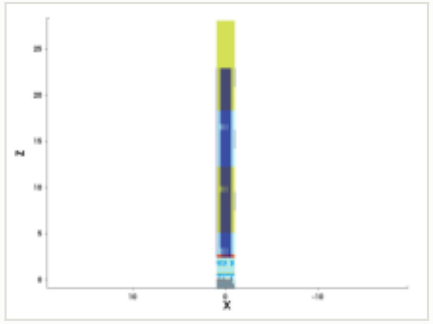

mask for this step

no mask for this step

steps by process area

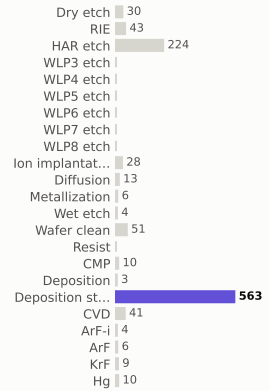

materials deposited (g)

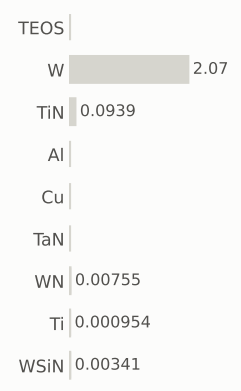

gases emitted (g)

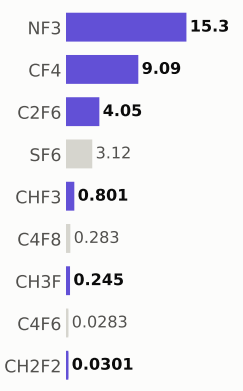

Step #13980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,412.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

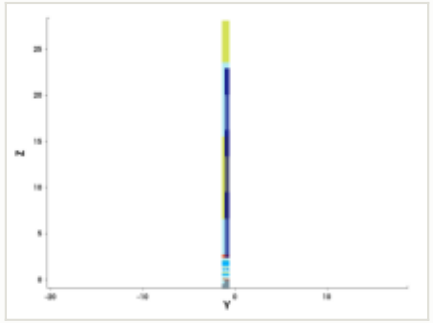

y cut at -1.035 µm

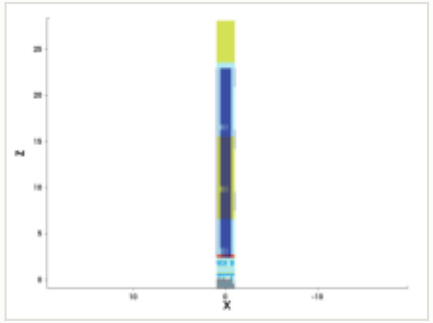

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 872.3 of 1,872.8 (this step +0.328)

MPW materials — 73.4 of 132.5 (this step +0.0159)

GPW gases — 466.6 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

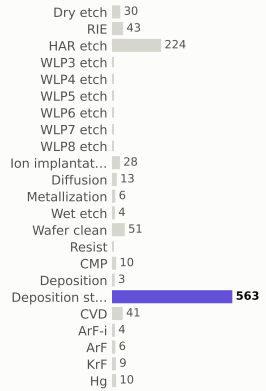

materials deposited (g)

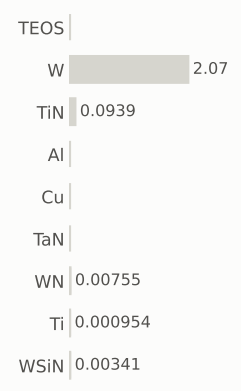

gases emitted (g)

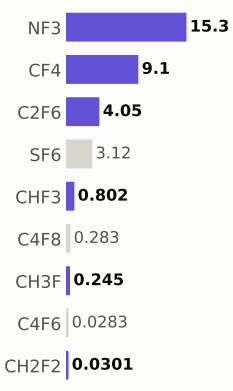

Step #13990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,412.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

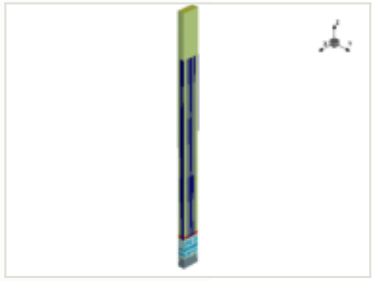

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

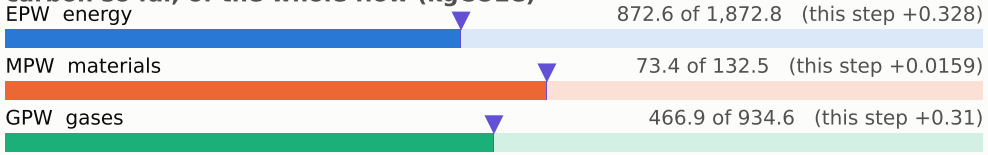

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

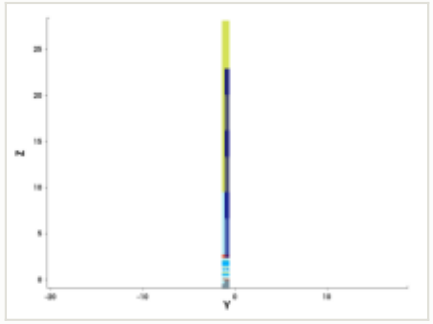

y cut at -1.035 µm

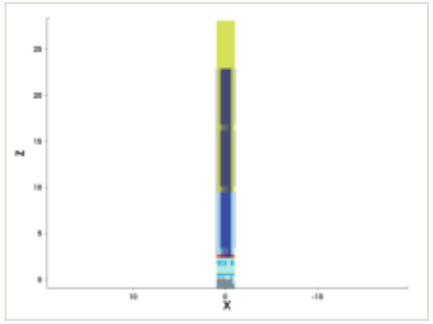

mask for this step

no mask for this step

steps by process area

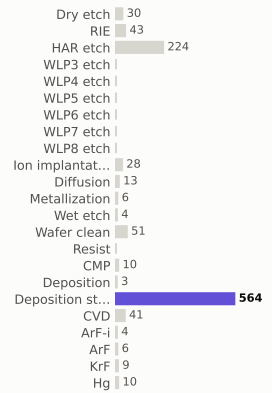

materials deposited (g)

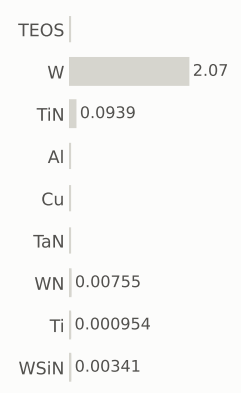

gases emitted (g)

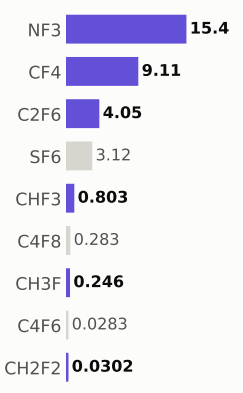

Step #14000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,413.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

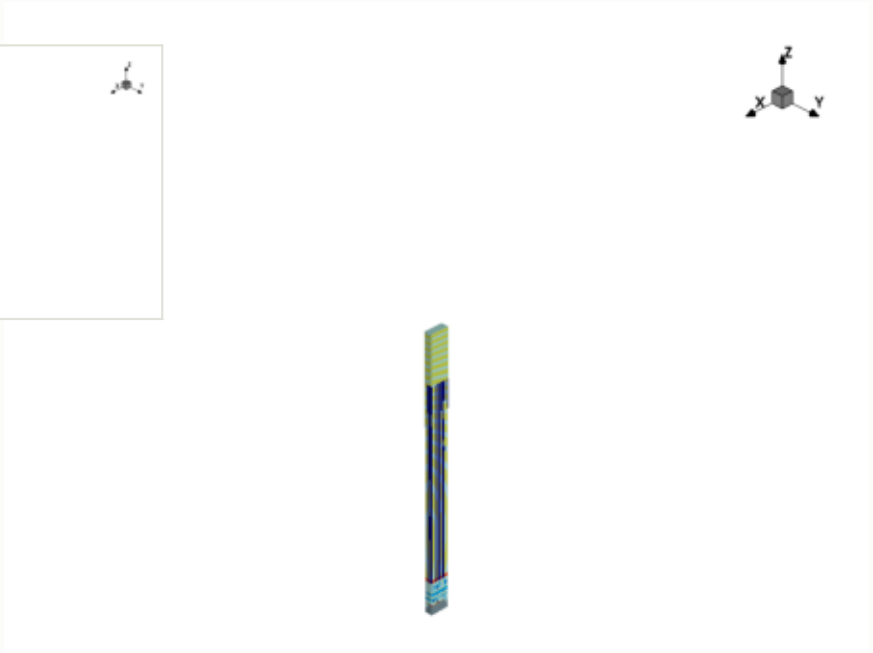

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

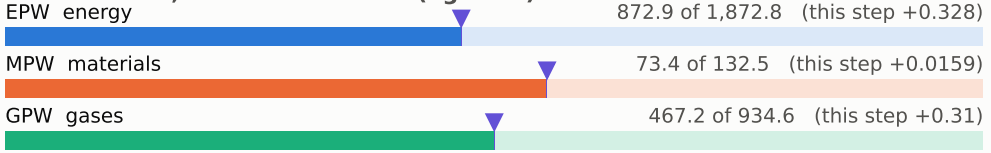

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

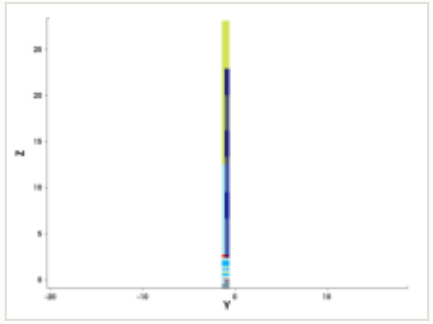

y cut at -1.035 µm

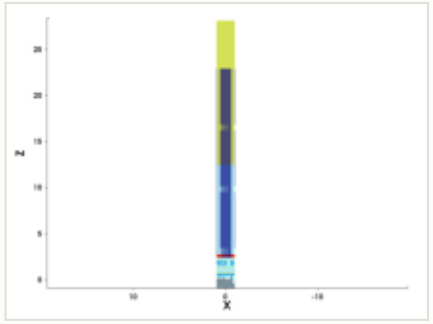

mask for this step

no mask for this step

steps by process area

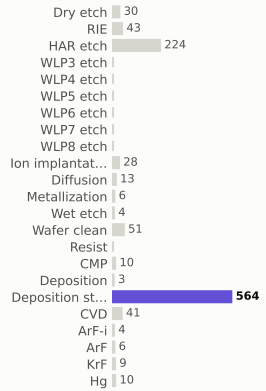

materials deposited (g)

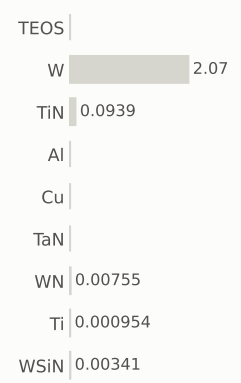

gases emitted (g)

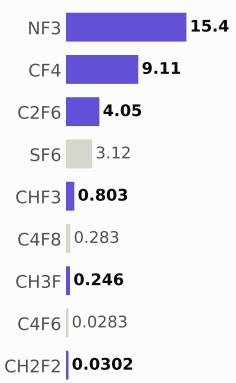

Step #14010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,414.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

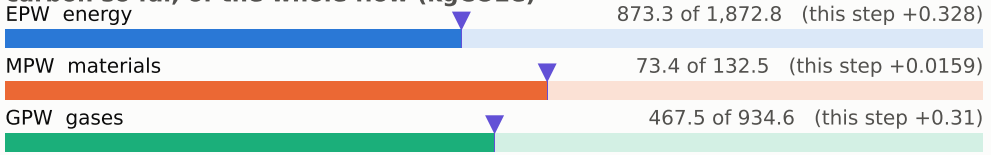

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

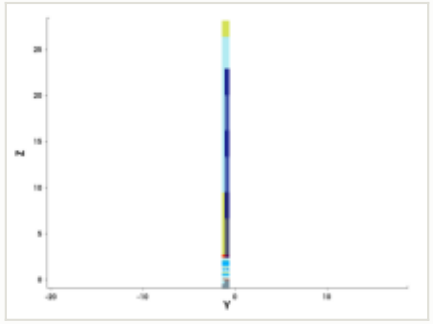

y cut at -1.035 µm

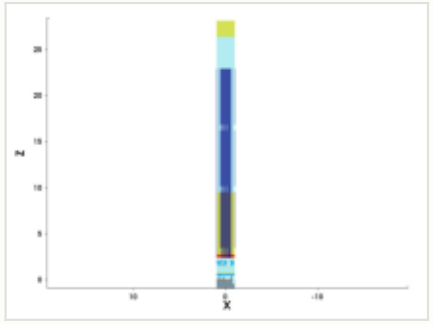

mask for this step

no mask for this step

steps by process area

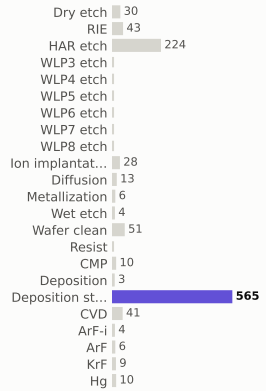

materials deposited (g)

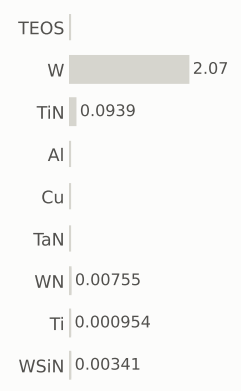

gases emitted (g)

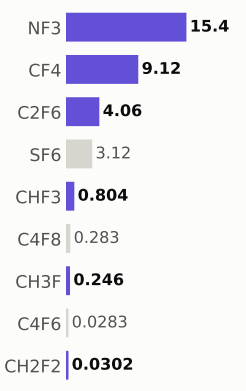

Step #14020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,414.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

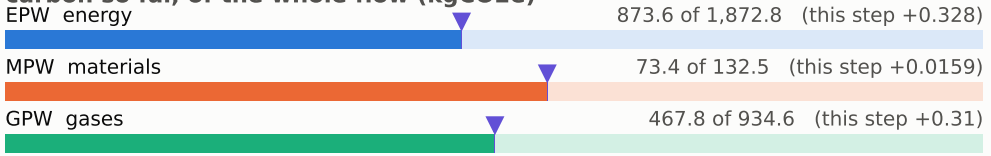

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

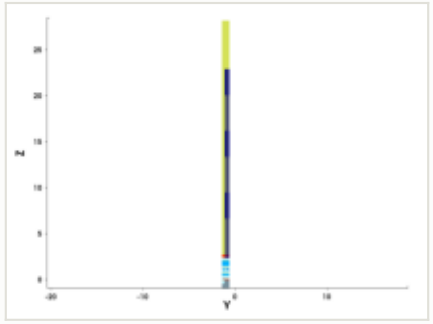

y cut at -1.035 µm

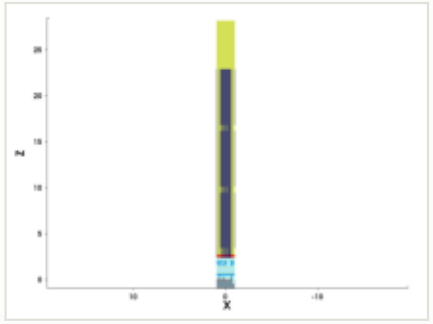

mask for this step

no mask for this step

steps by process area

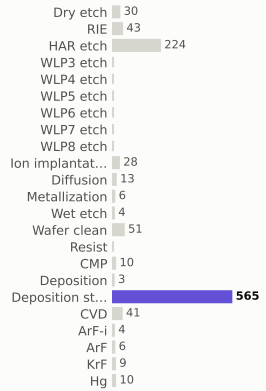

materials deposited (g)

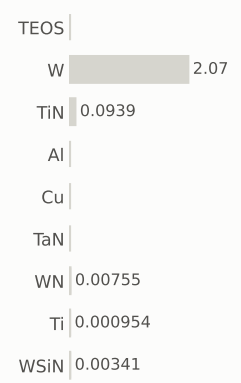

gases emitted (g)

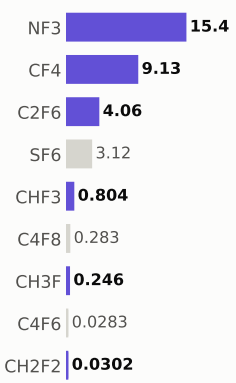

Step #14030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,415.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

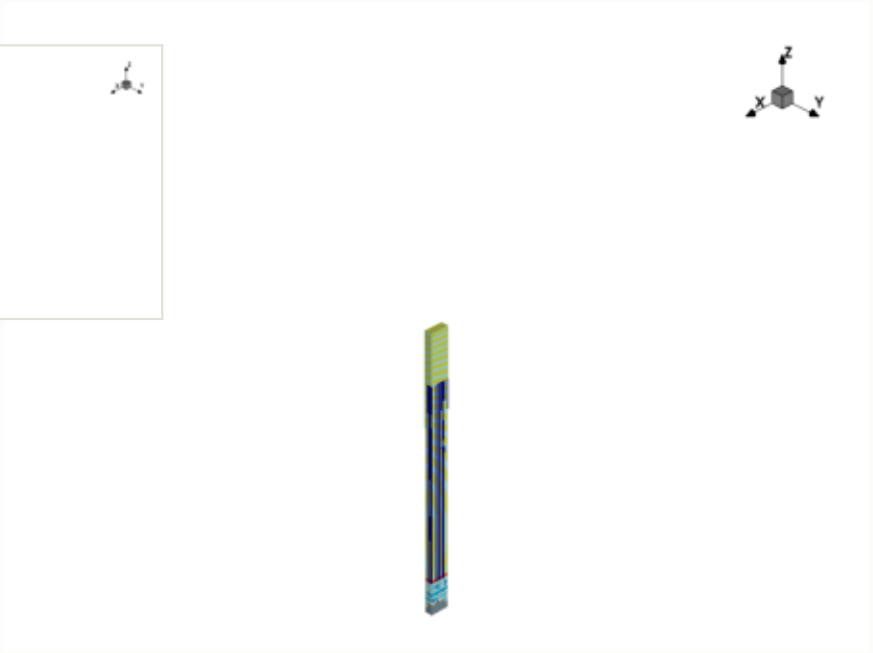

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

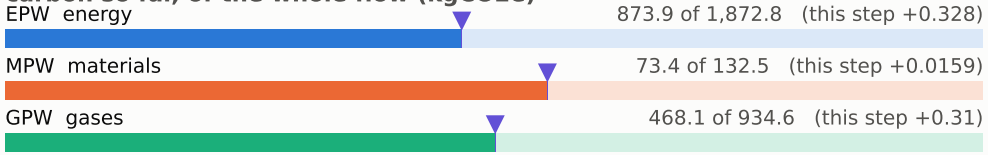

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

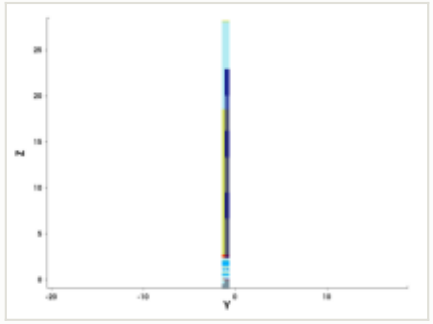

y cut at -1.035 µm

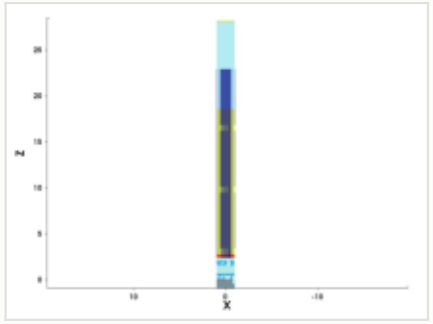

mask for this step

no mask for this step

steps by process area

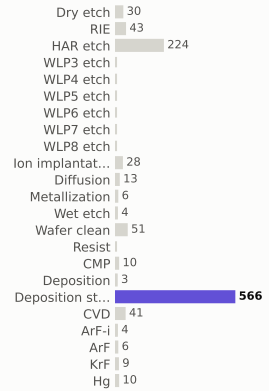

materials deposited (g)

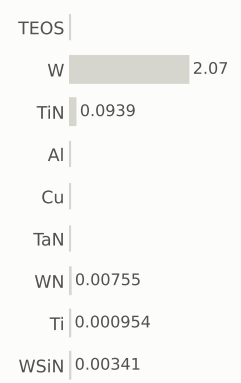

gases emitted (g)

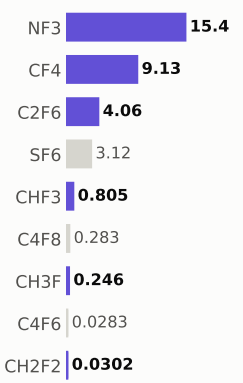

Step #14040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,416.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

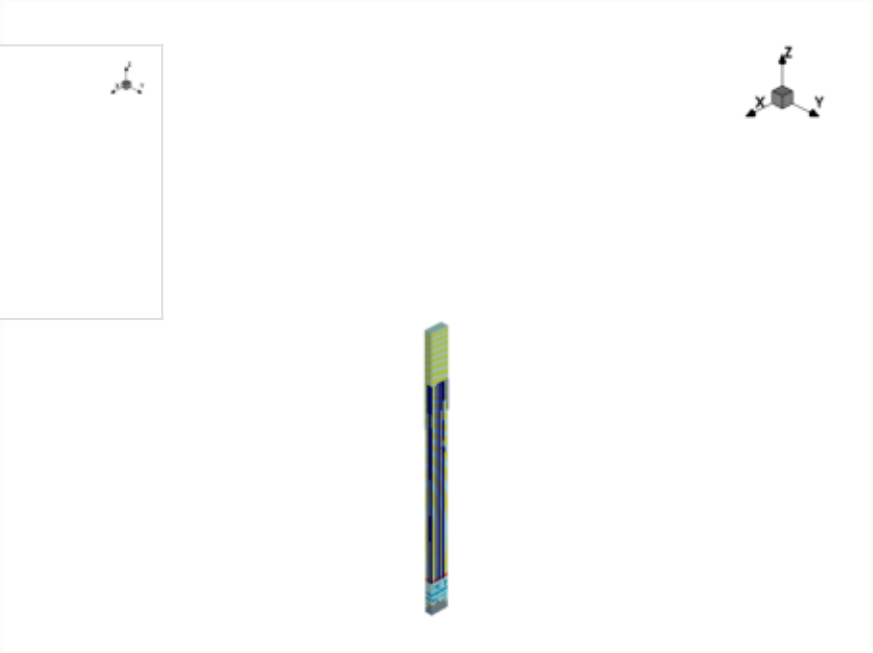

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

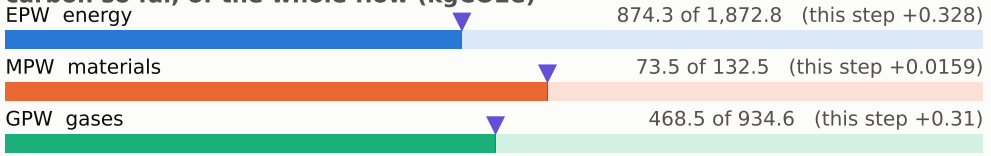

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

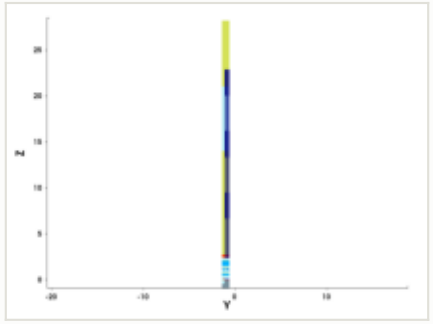

y cut at -1.035 µm

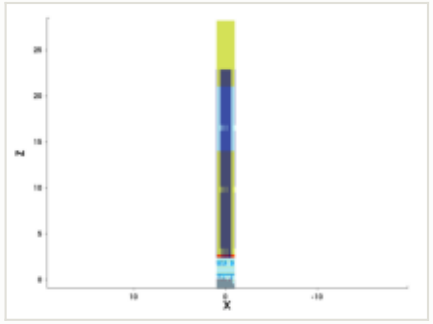

mask for this step

no mask for this step

steps by process area

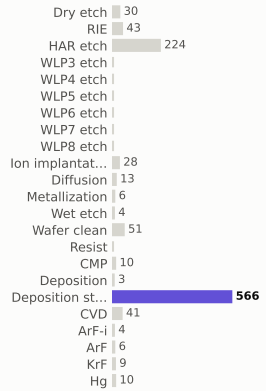

materials deposited (g)

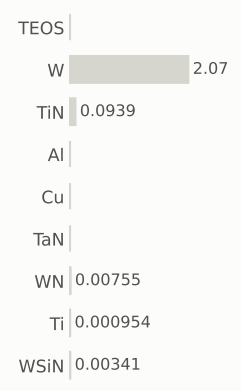

gases emitted (g)

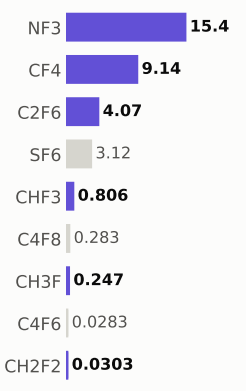

Step #14050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,416.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

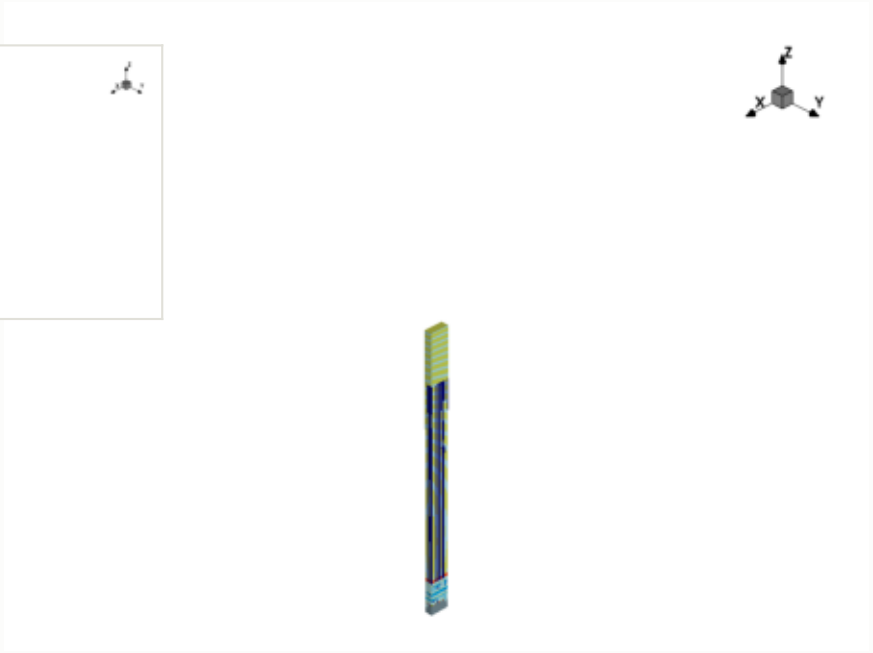

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

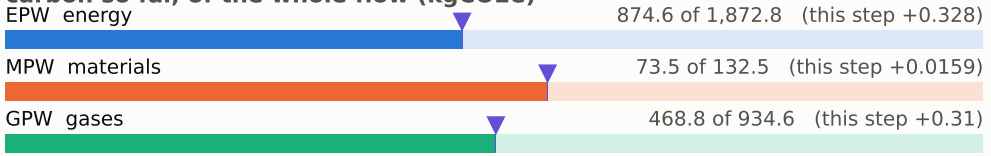

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

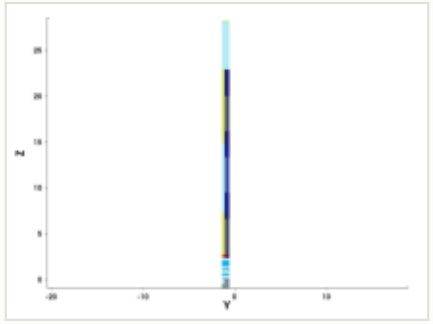

y cut at -1.035 µm

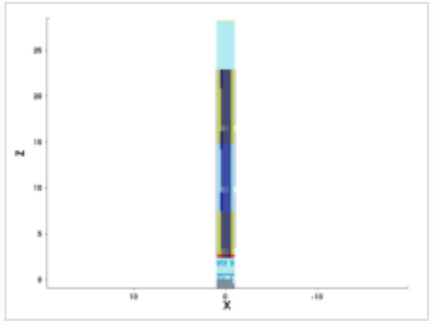

mask for this step

no mask for this step

steps by process area

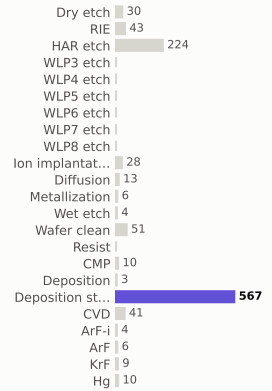

materials deposited (g)

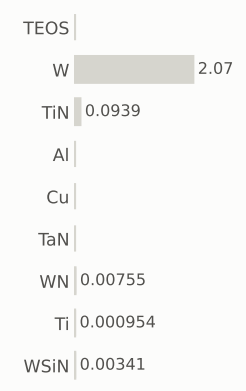

gases emitted (g)

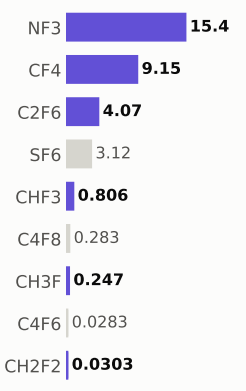

Step #14060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,417.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

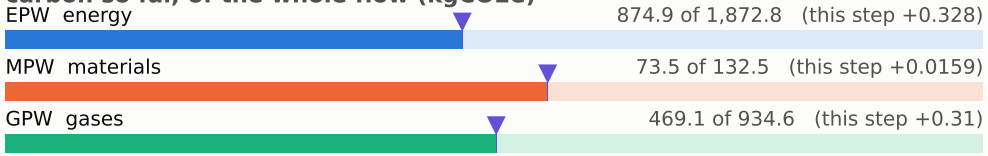

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

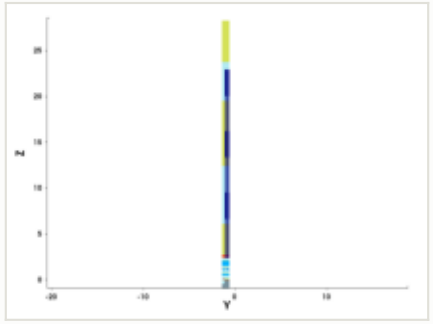

y cut at -1.035 µm

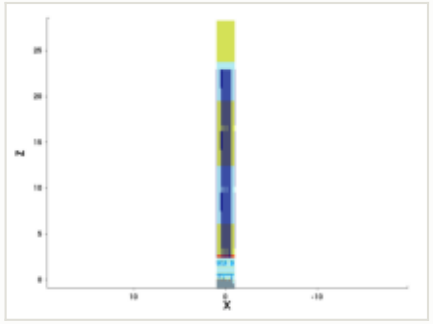

mask for this step

no mask for this step

steps by process area

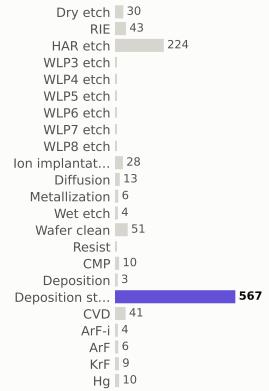

materials deposited (g)

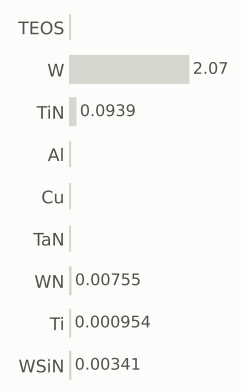

gases emitted (g)

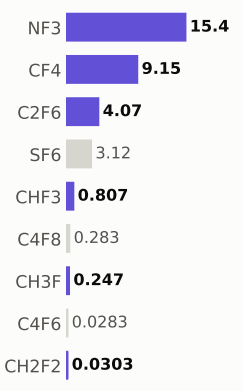

Step #14070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,418.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

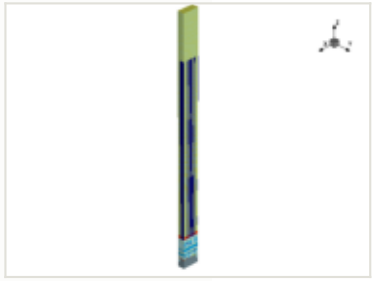

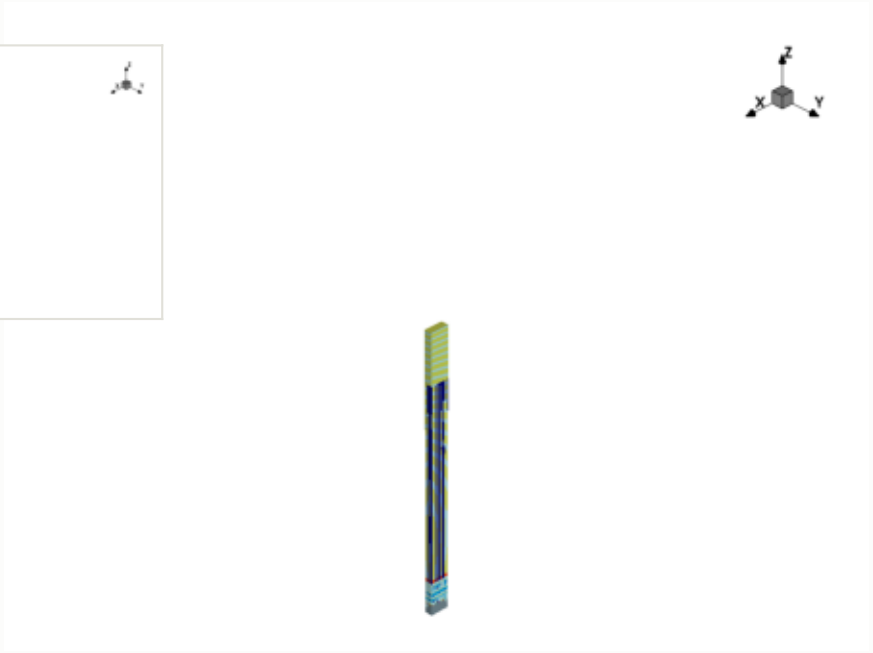

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

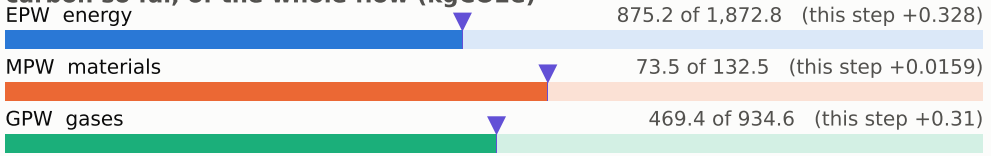

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

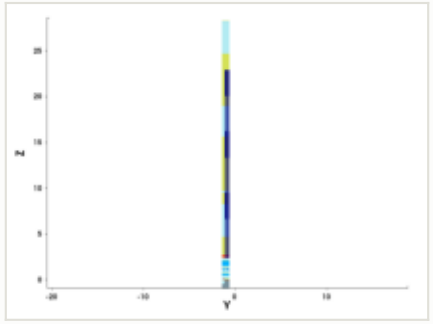

y cut at -1.035 µm

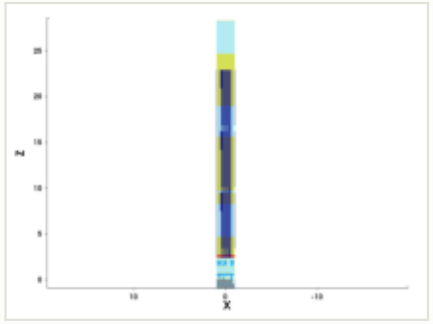

mask for this step

no mask for this step

steps by process area

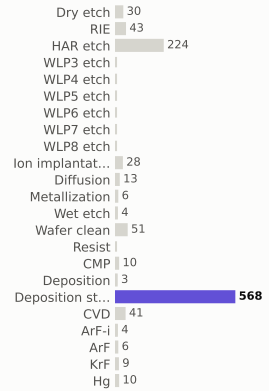

materials deposited (g)

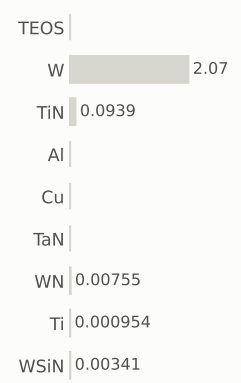

gases emitted (g)

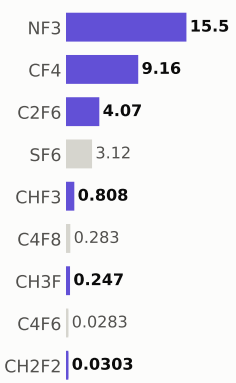

Step #14080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,418.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

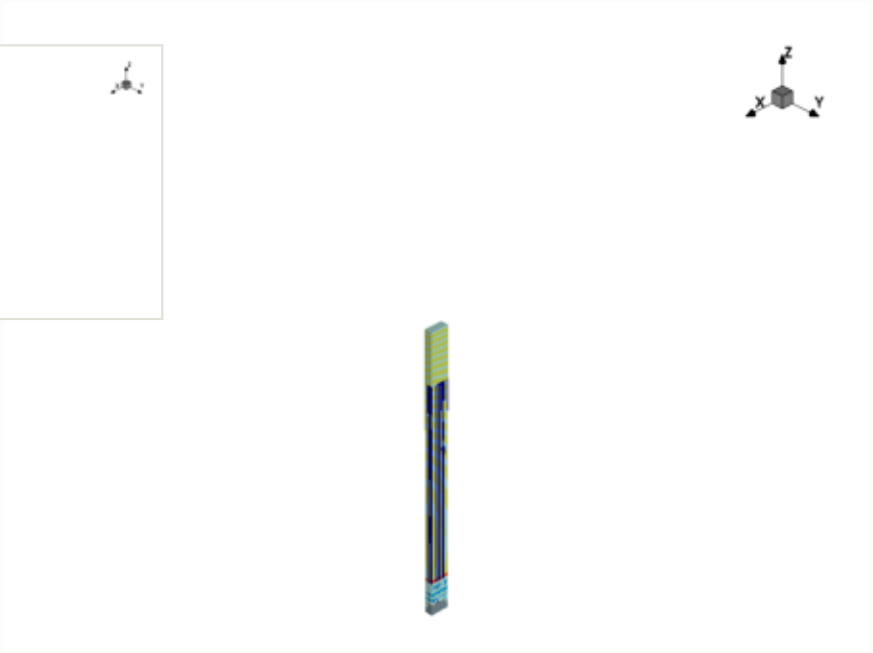

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

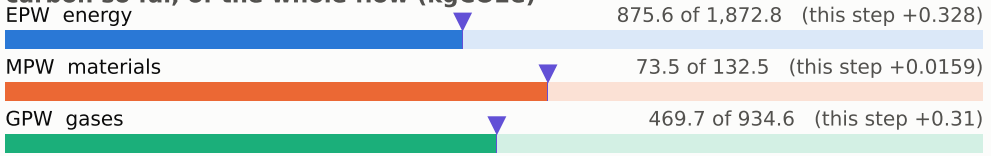

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

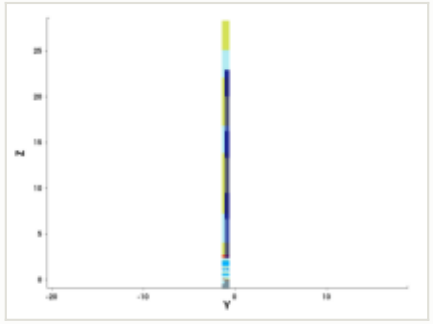

y cut at -1.035 µm

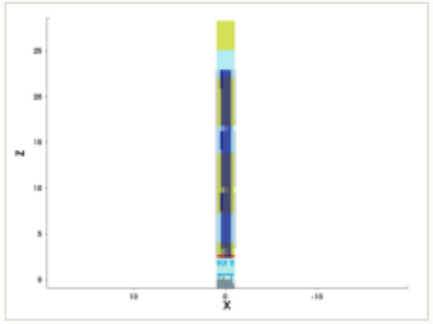

mask for this step

no mask for this step

steps by process area

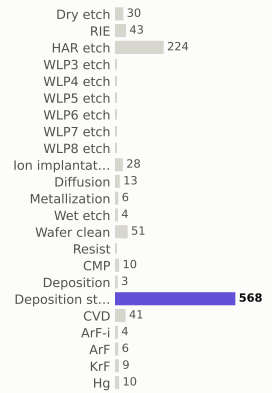

materials deposited (g)

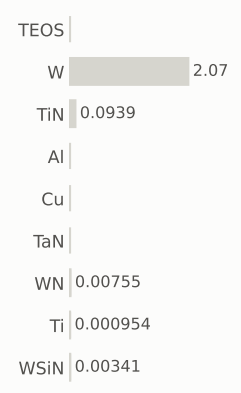

gases emitted (g)

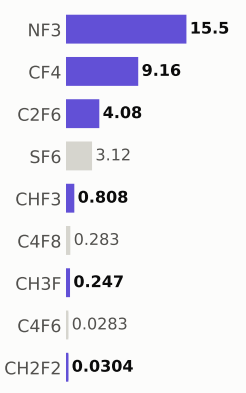

Step #14090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,419.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

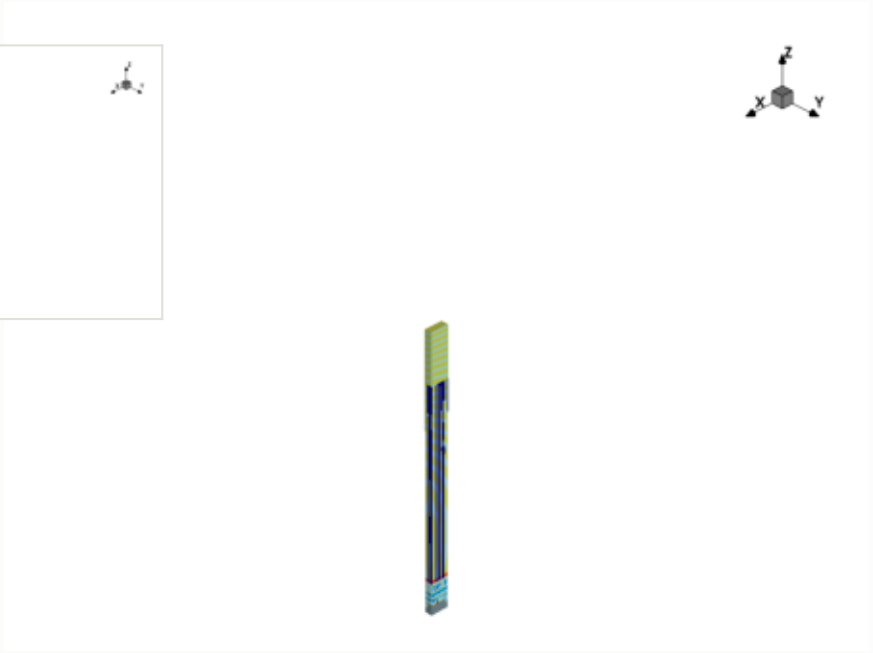

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

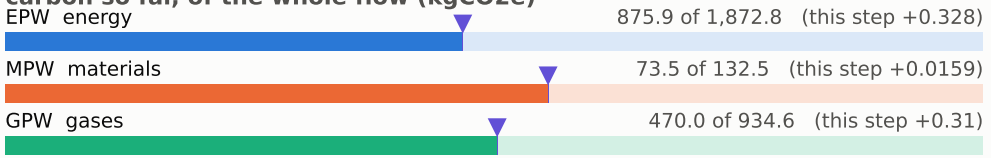

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

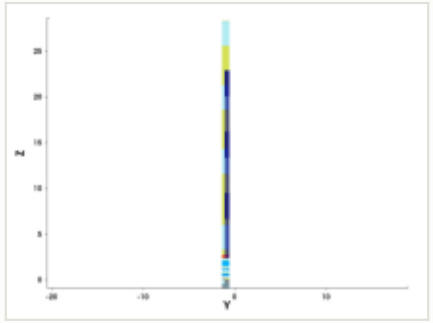

y cut at -1.035 µm

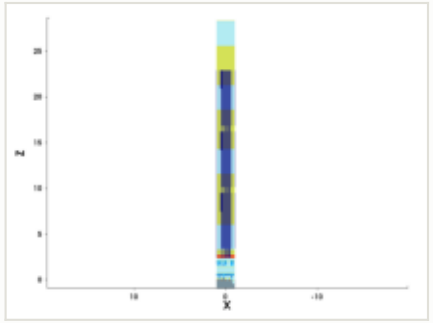

mask for this step

no mask for this step

steps by process area

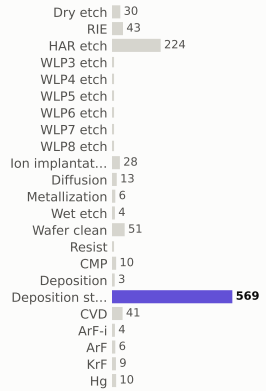

materials deposited (g)

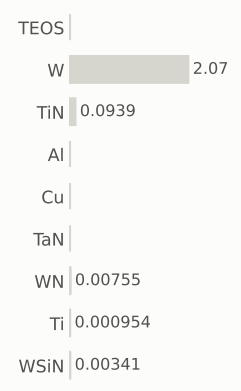

gases emitted (g)

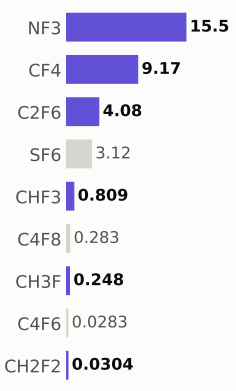

Step #14100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,420.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

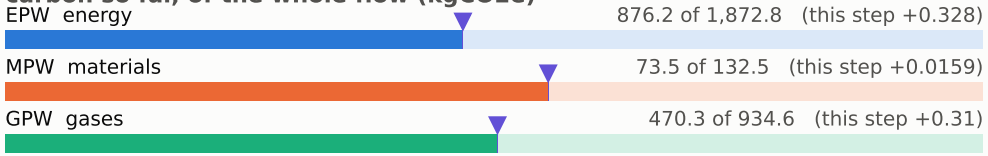

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

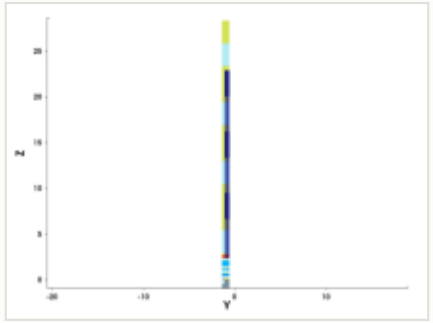

y cut at -1.035 µm

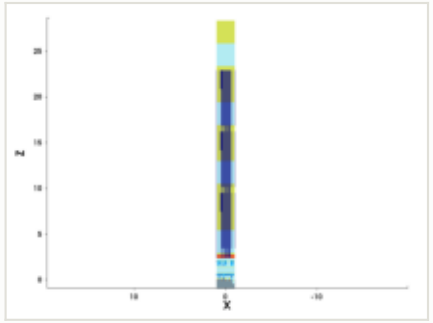

mask for this step

no mask for this step

steps by process area

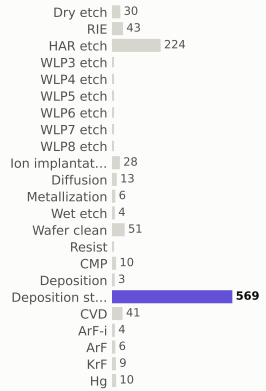

materials deposited (g)

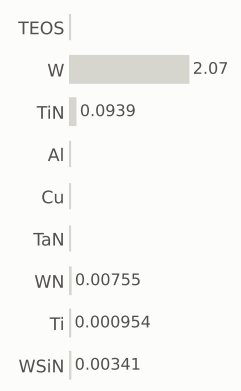

gases emitted (g)

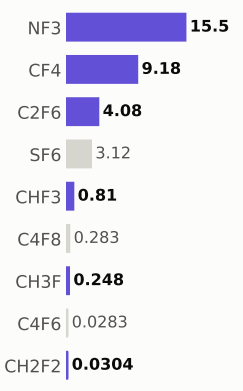

Step #14110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,420.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

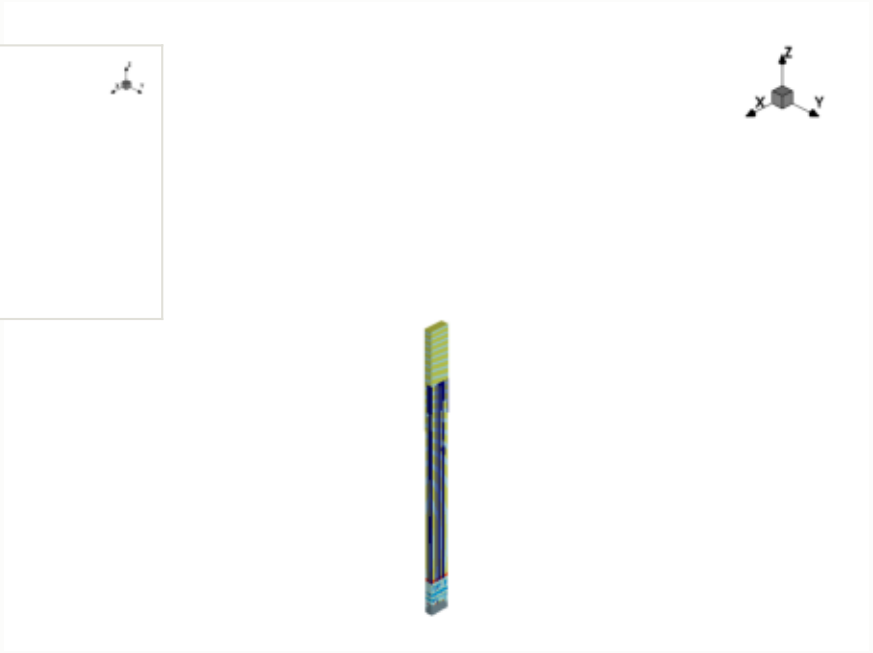

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

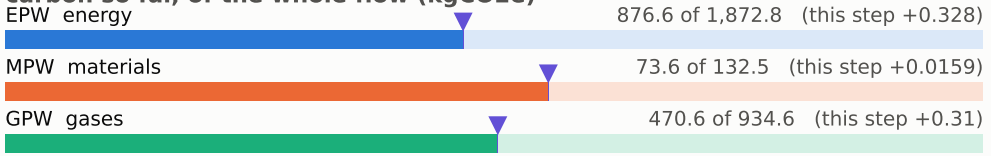

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

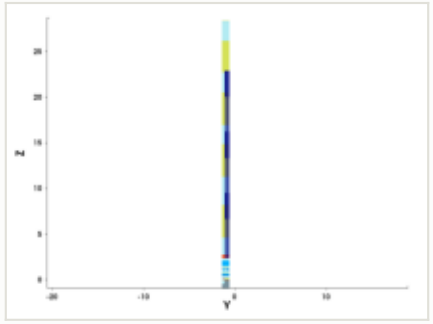

y cut at -1.035 µm

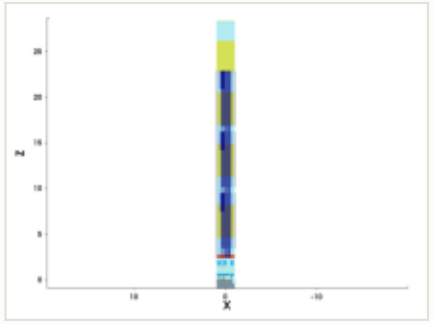

mask for this step

no mask for this step

steps by process area

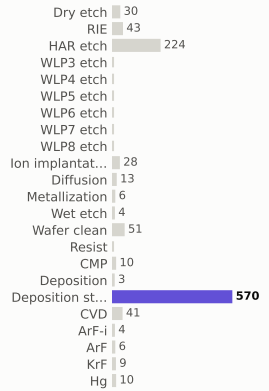

materials deposited (g)

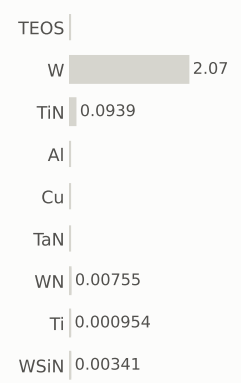

gases emitted (g)

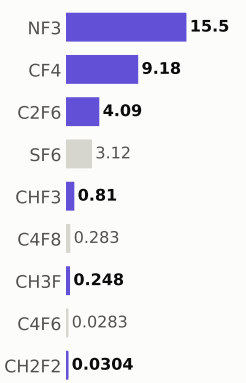

Step #14120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,421.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

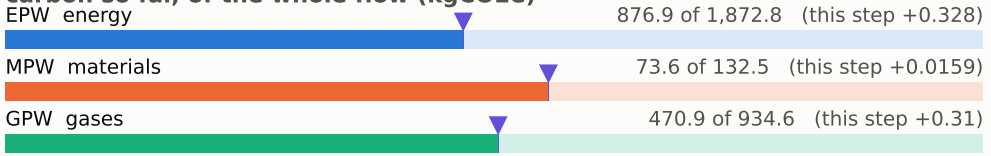

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

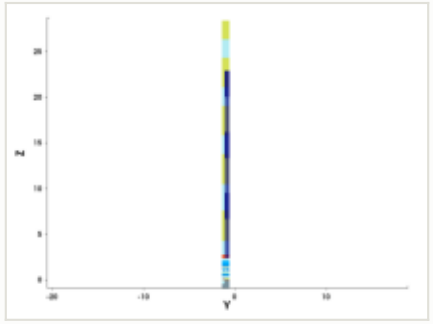

y cut at -1.035 µm

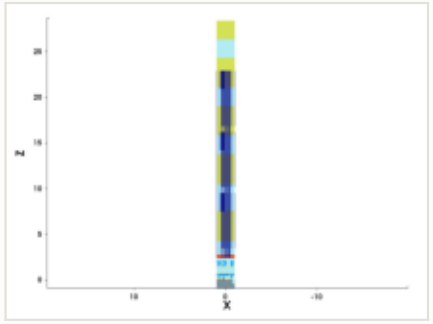

mask for this step

no mask for this step

steps by process area

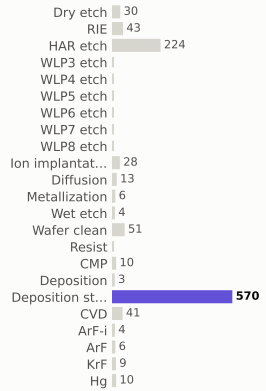

materials deposited (g)

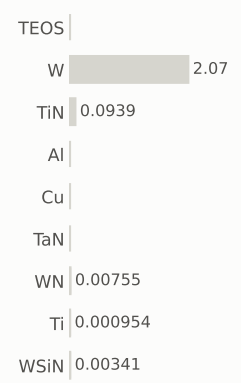

gases emitted (g)

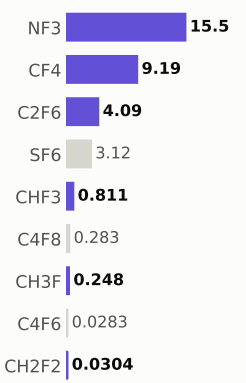

Step #14130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,422.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

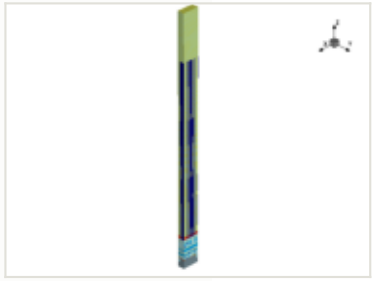

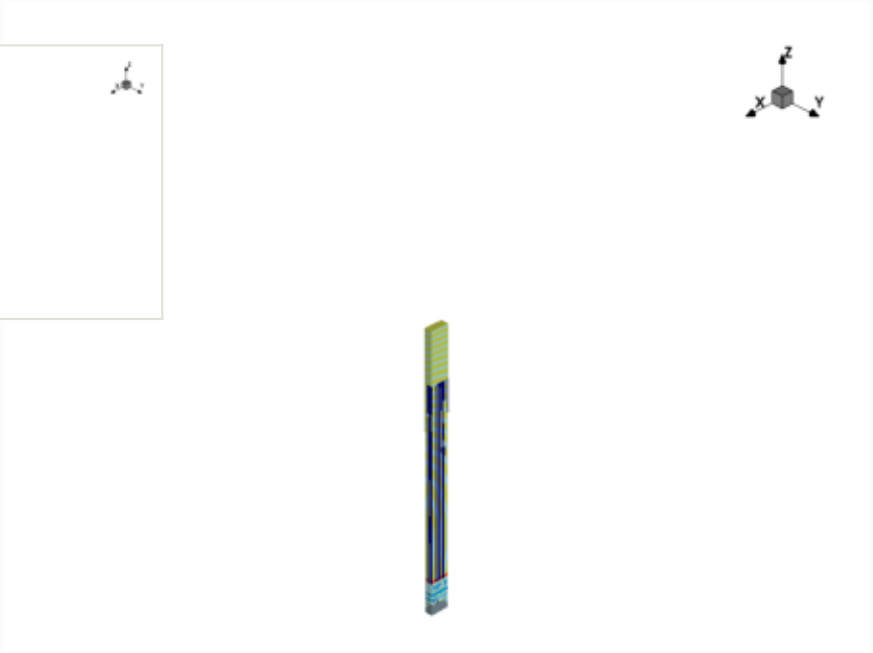

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

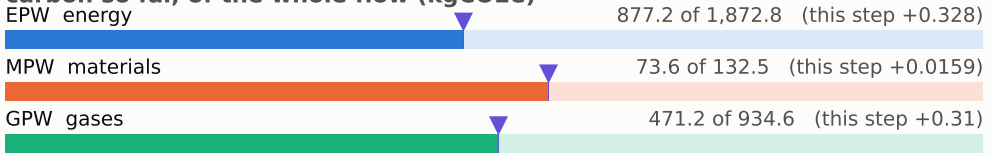

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

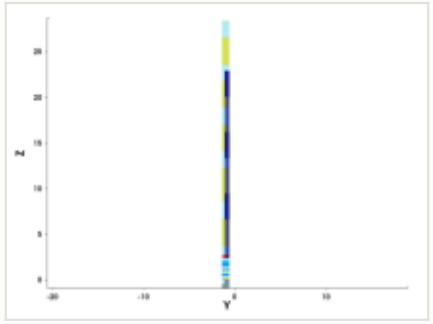

y cut at -1.035 µm

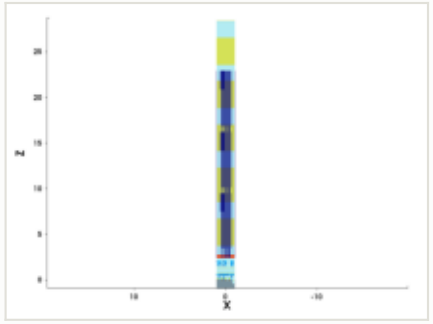

mask for this step

no mask for this step

steps by process area

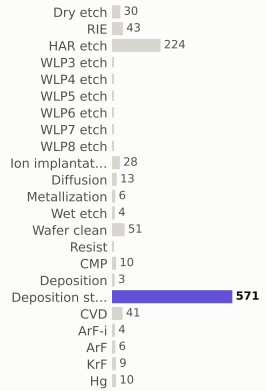

materials deposited (g)

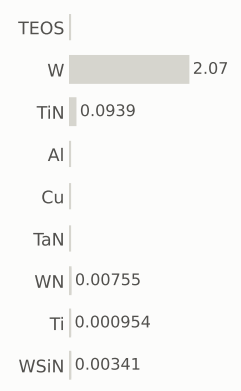

gases emitted (g)

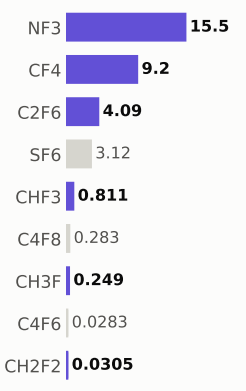

Step #14140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,422.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

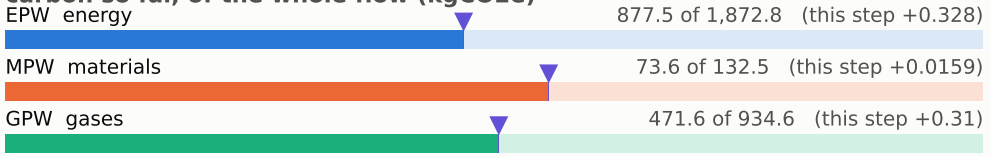

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

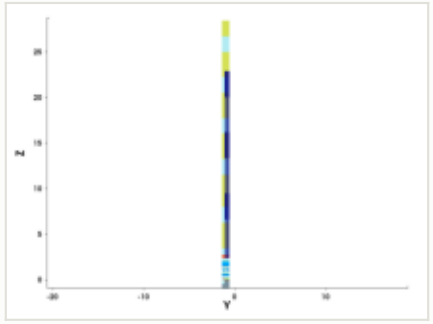

y cut at -1.035 µm

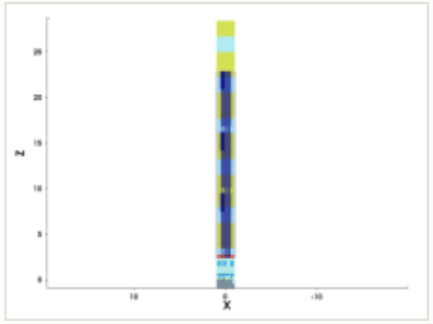

mask for this step

no mask for this step

steps by process area

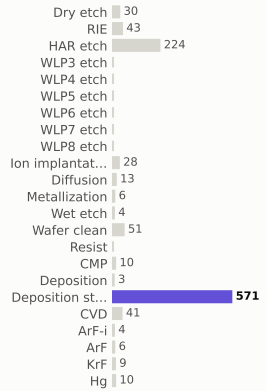

materials deposited (g)

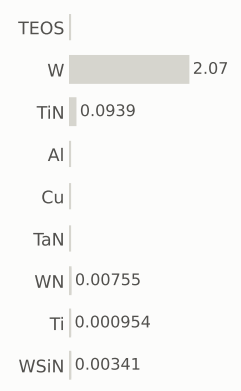

gases emitted (g)

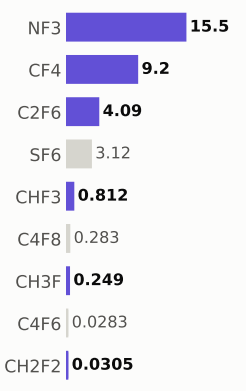

Step #14150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,423.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

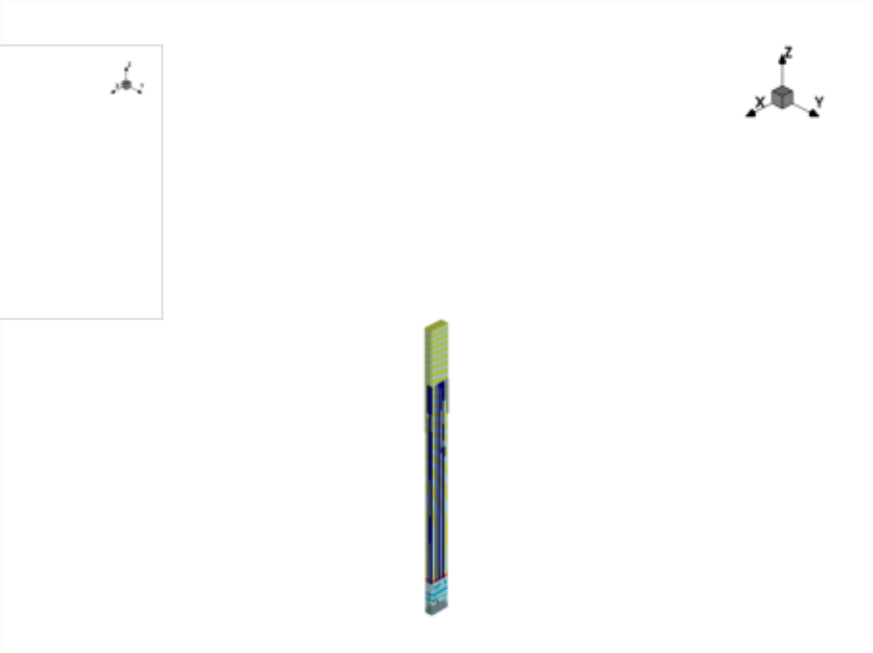

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

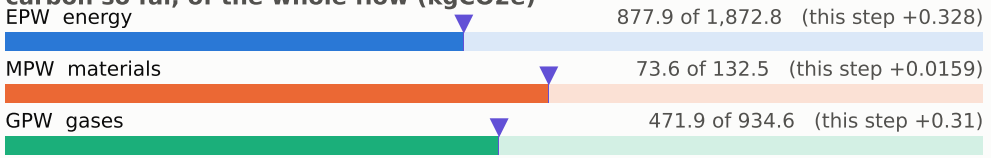

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

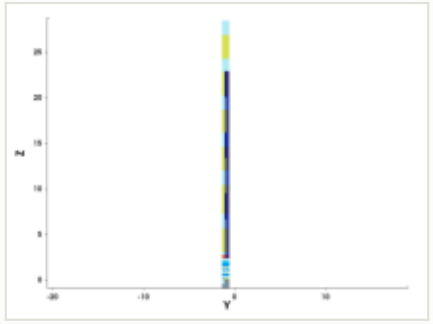

y cut at -1.035 µm

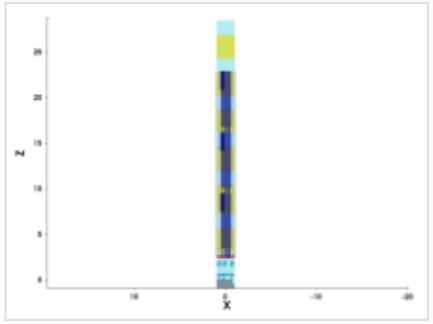

mask for this step

no mask for this step

steps by process area

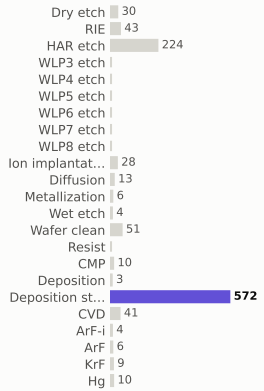

materials deposited (g)

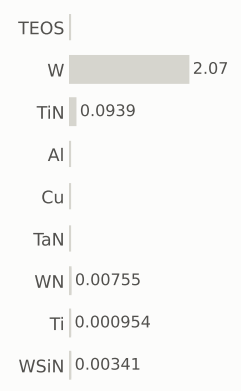

gases emitted (g)

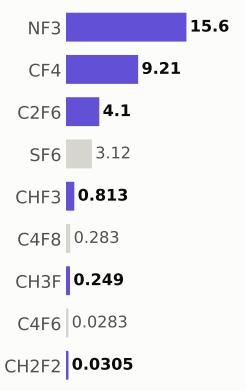

Step #14160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,424.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

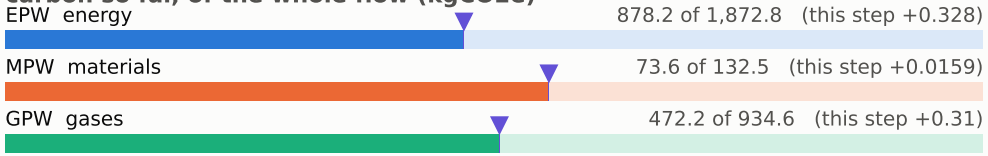

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

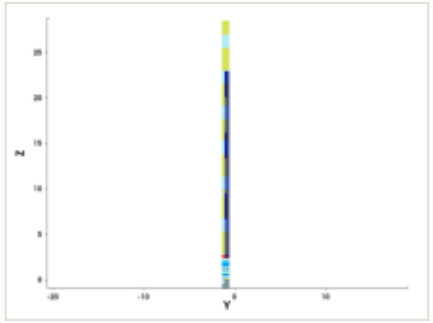

y cut at -1.035 µm

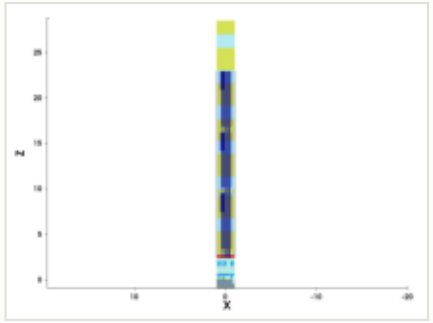

mask for this step

no mask for this step

steps by process area

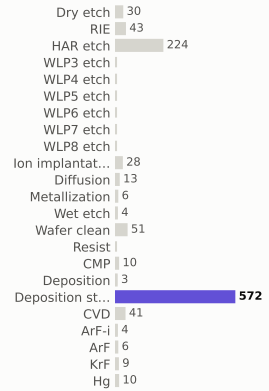

materials deposited (g)

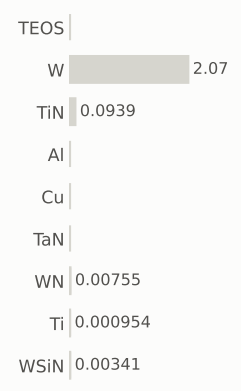

gases emitted (g)

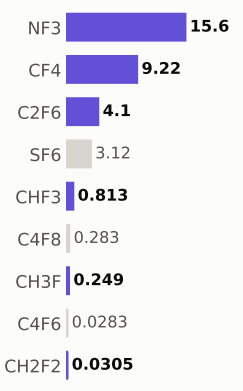

Step #14170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,424.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

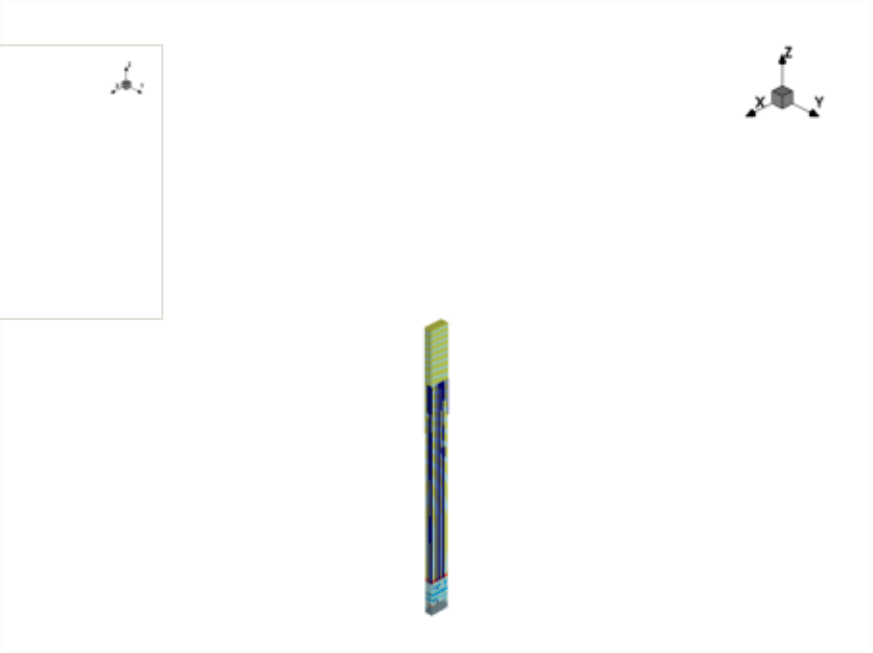

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

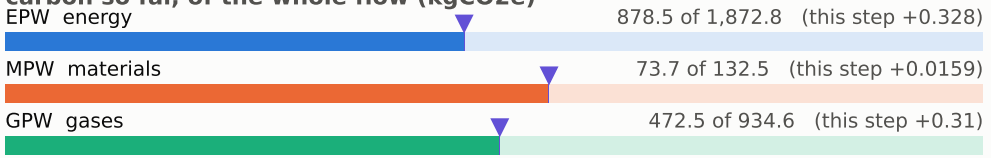

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

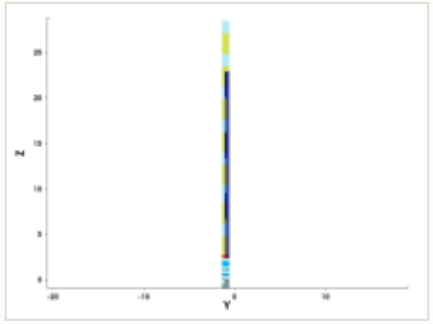

y cut at -1.035 µm

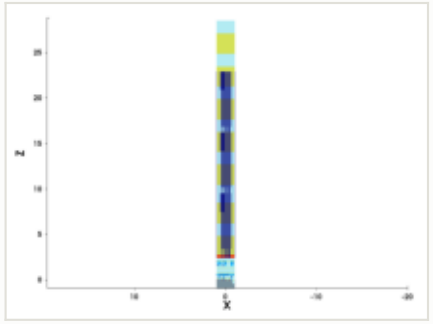

mask for this step

no mask for this step

steps by process area

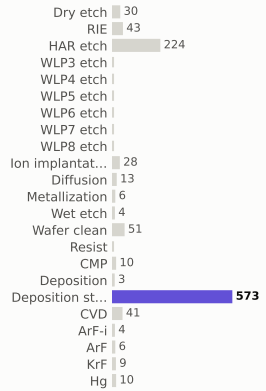

materials deposited (g)

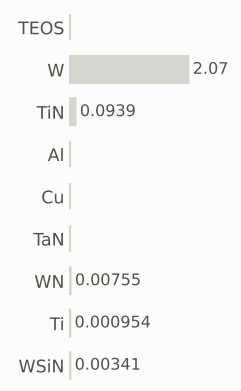

gases emitted (g)

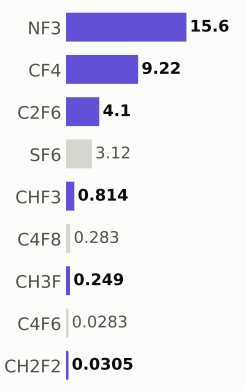

Step #14180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,425.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

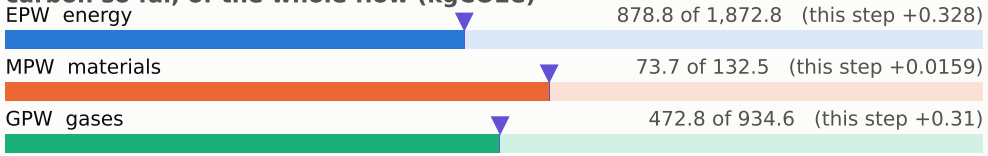

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

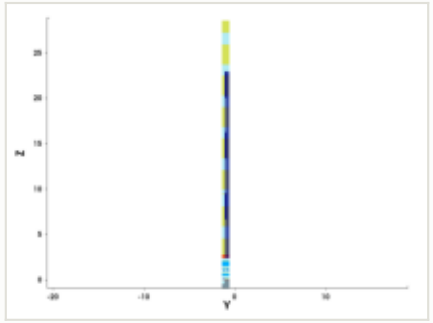

y cut at -1.035 µm

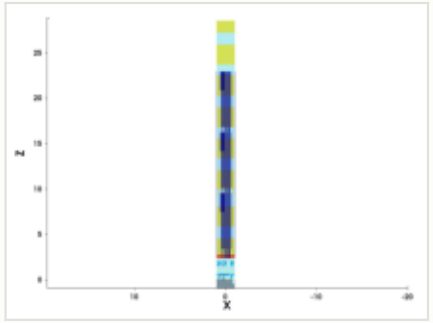

mask for this step

no mask for this step

steps by process area

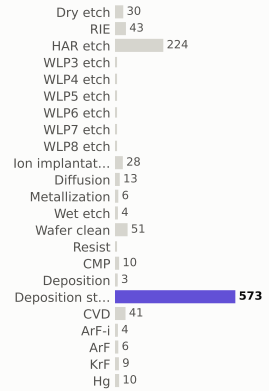

materials deposited (g)

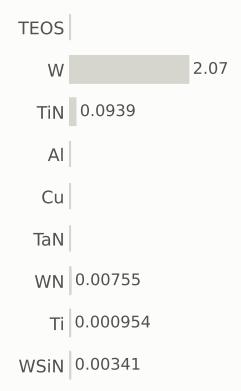

gases emitted (g)

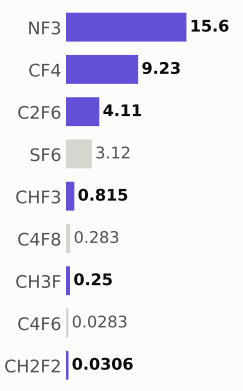

Step #14190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,426.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

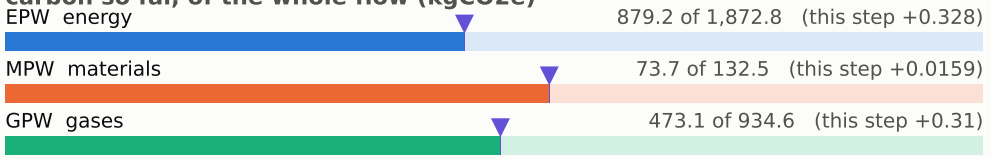

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

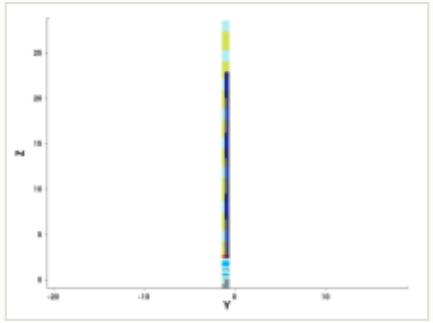

y cut at -1.035 µm

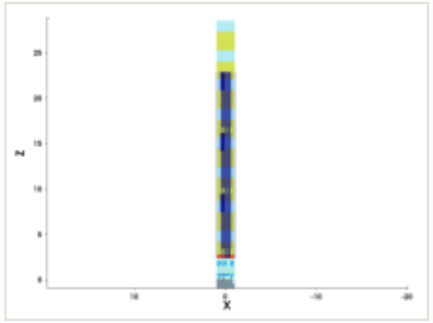

mask for this step

no mask for this step

steps by process area

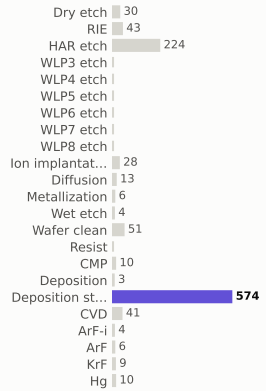

materials deposited (g)

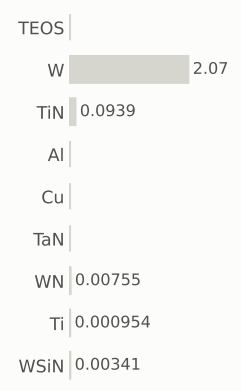

gases emitted (g)

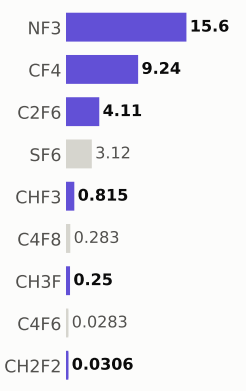

Step #14200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,426.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

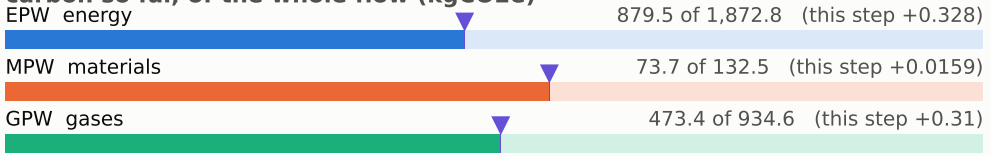

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

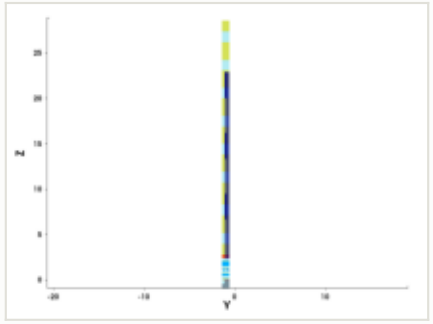

y cut at -1.035 µm

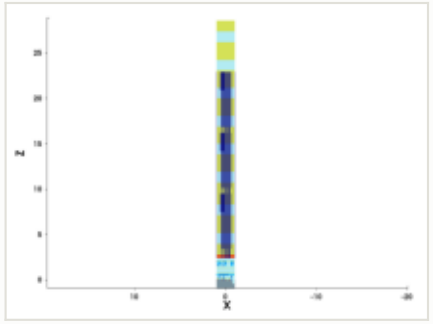

mask for this step

no mask for this step

steps by process area

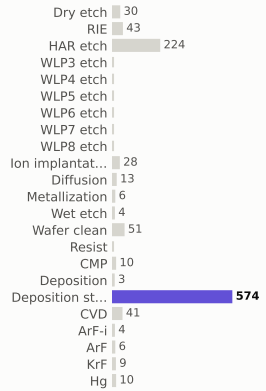

materials deposited (g)

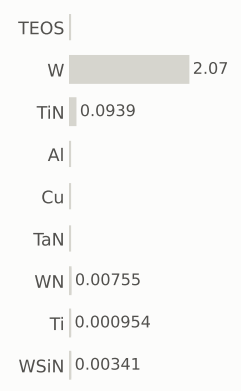

gases emitted (g)

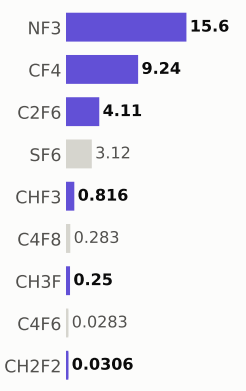

Step #14210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,427.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

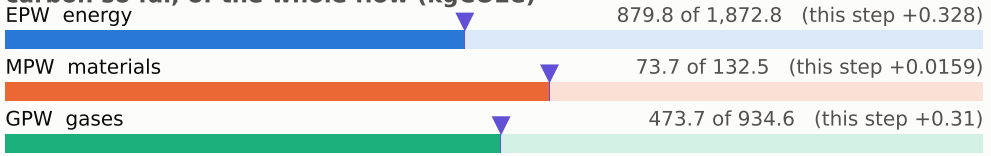

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

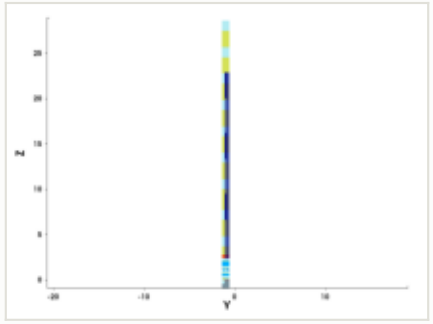

y cut at -1.035 µm

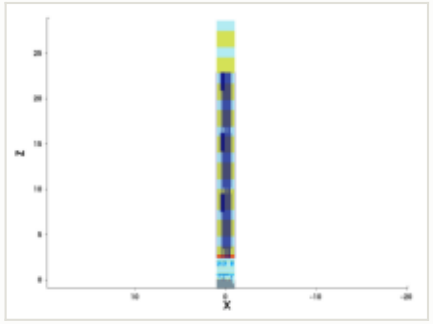

mask for this step

no mask for this step

steps by process area

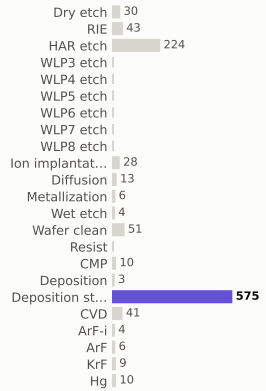

materials deposited (g)

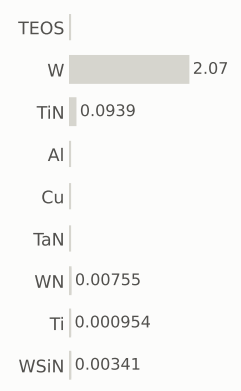

gases emitted (g)

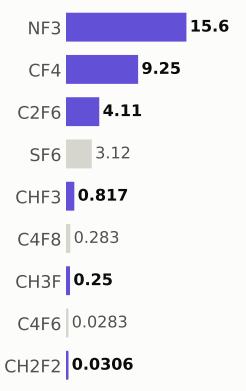

Step #14220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,427.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

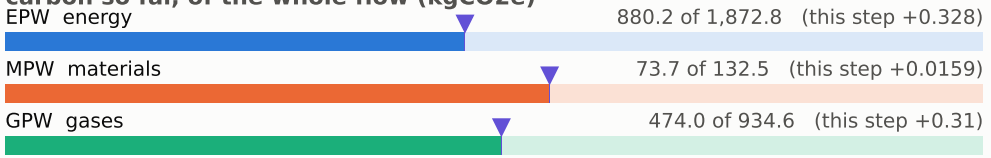

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

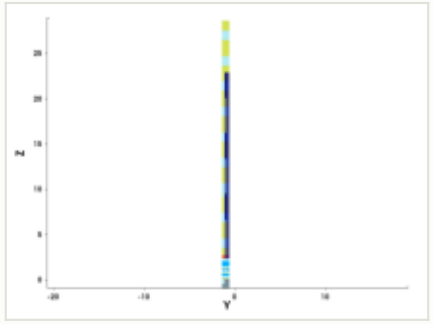

y cut at -1.035 µm

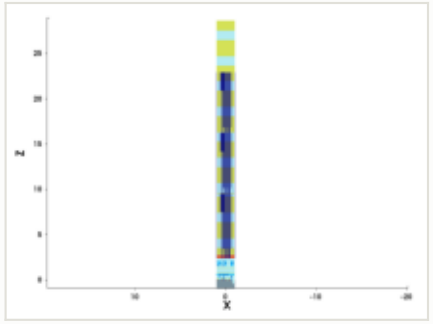

mask for this step

no mask for this step

steps by process area

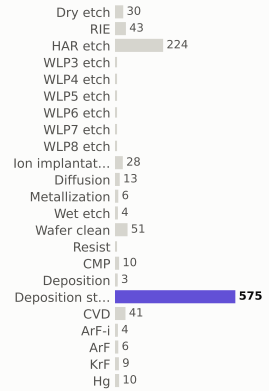

materials deposited (g)

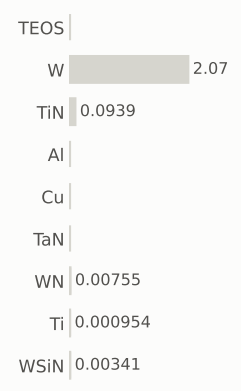

gases emitted (g)

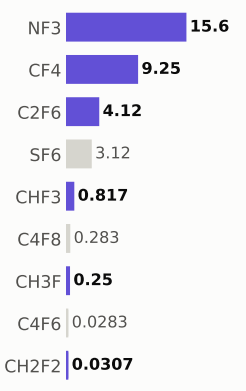

Step #14230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,428.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

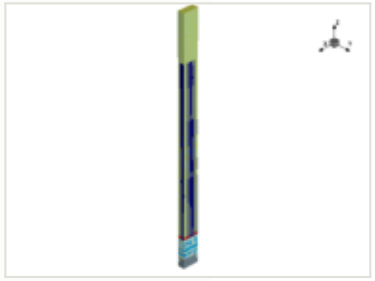

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

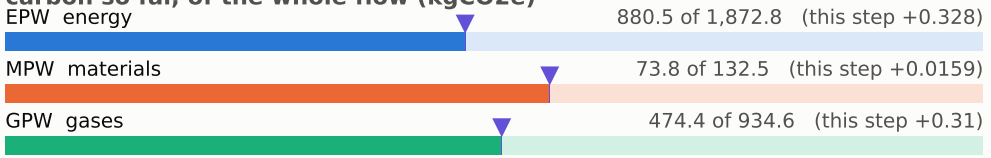

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

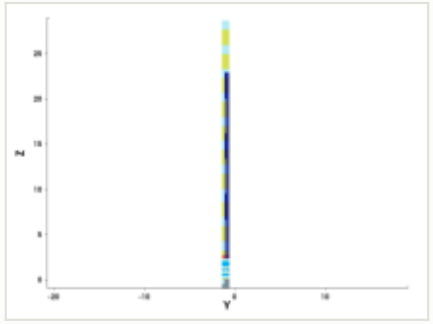

y cut at -1.035 µm

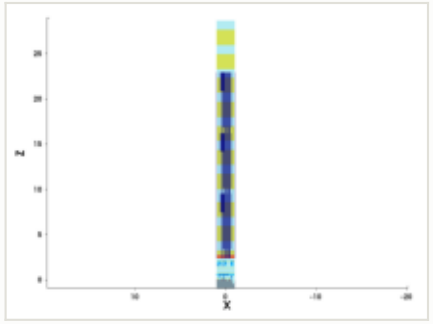

mask for this step

no mask for this step

steps by process area

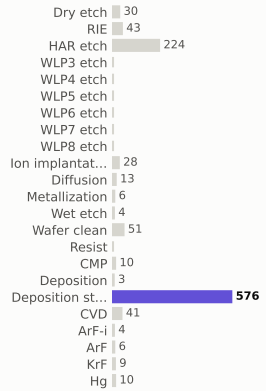

materials deposited (g)

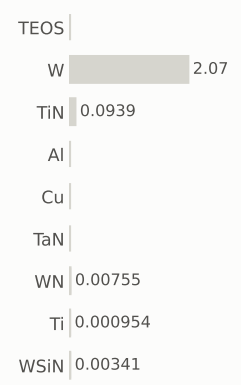

gases emitted (g)

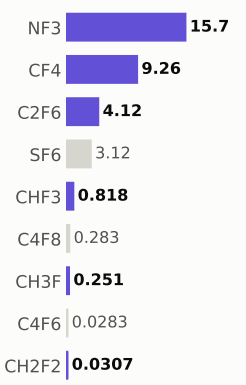

Step #14240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,429.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

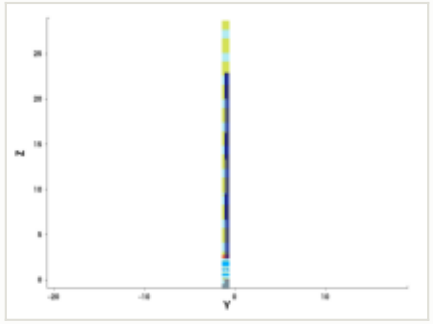

y cut at -1.035 µm

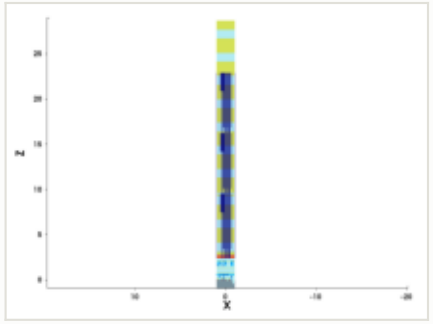

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

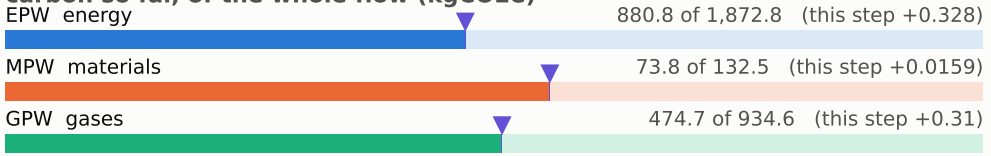

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

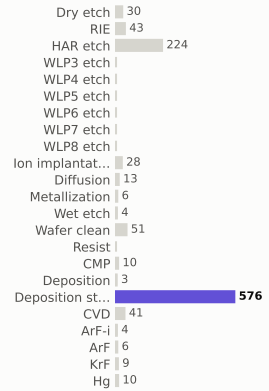

materials deposited (g)

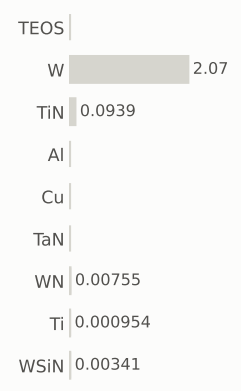

gases emitted (g)

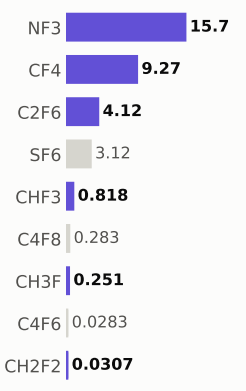

Step #14250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,429.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

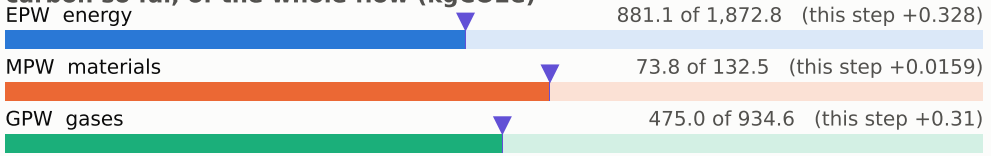

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

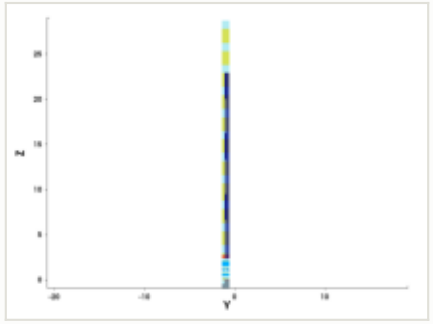

y cut at -1.035 µm

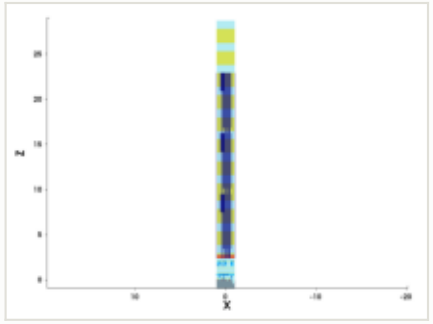

mask for this step

no mask for this step

steps by process area

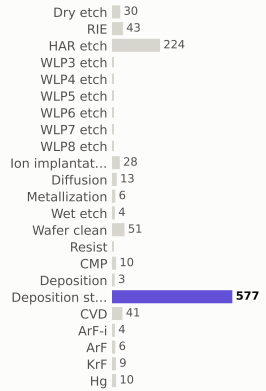

materials deposited (g)

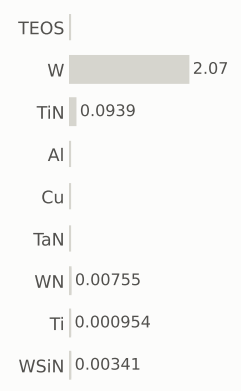

gases emitted (g)

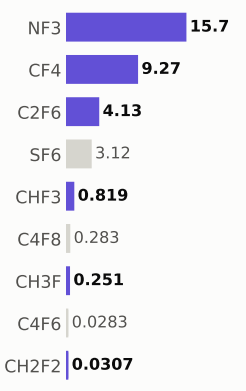

Step #14260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,430.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

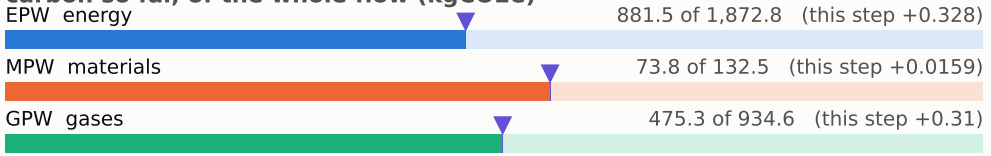

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

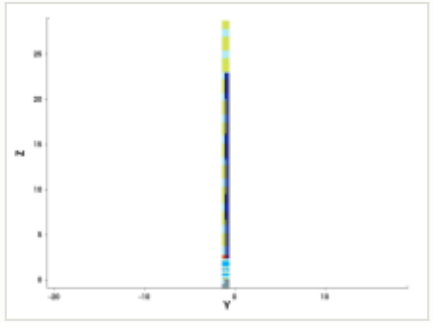

y cut at -1.035 µm

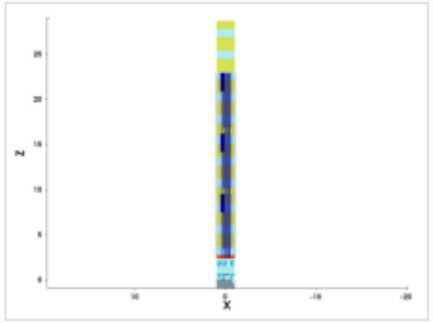

mask for this step

no mask for this step

steps by process area

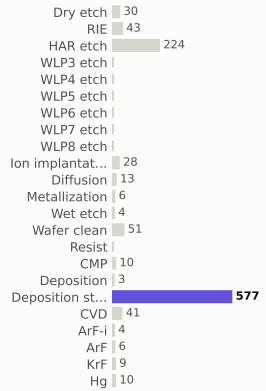

materials deposited (g)

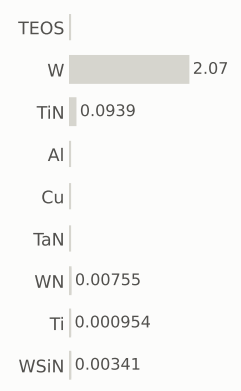

gases emitted (g)

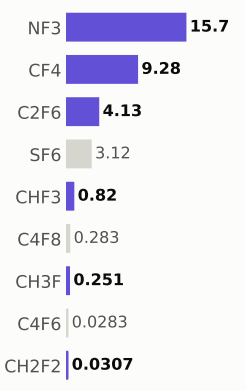

Step #14270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,431.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

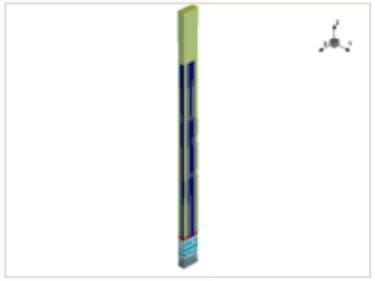

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

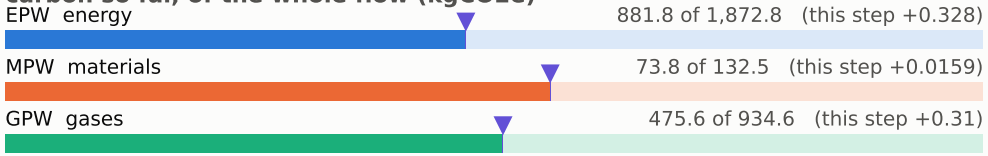

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

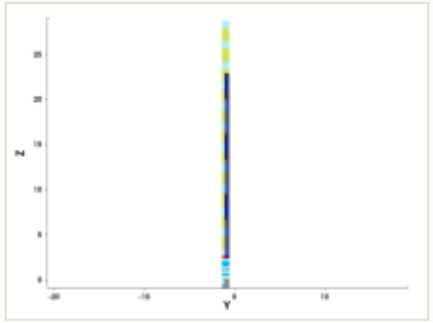

y cut at -1.035 µm

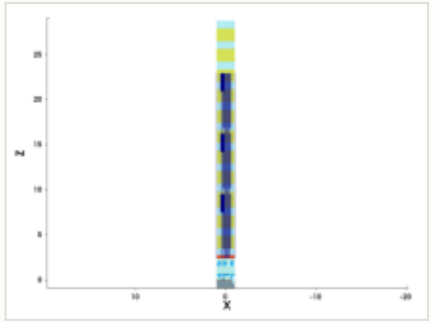

mask for this step

no mask for this step

steps by process area

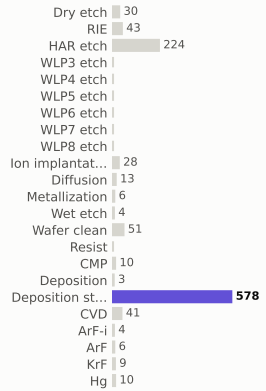

materials deposited (g)

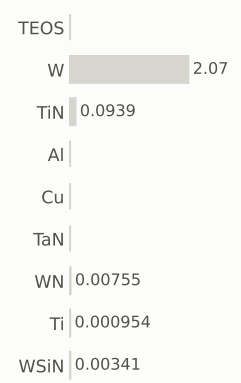

gases emitted (g)

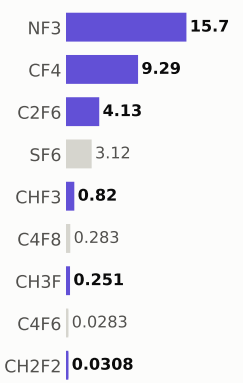

Step #14280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,431.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

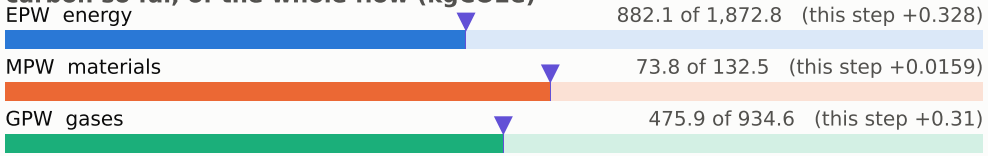

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

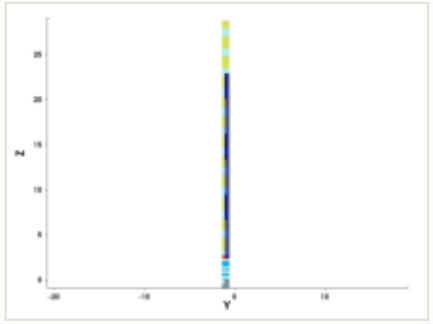

y cut at -1.035 µm

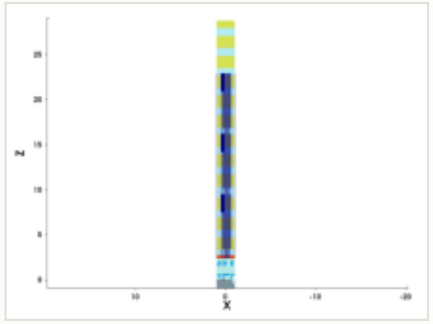

mask for this step

no mask for this step

steps by process area

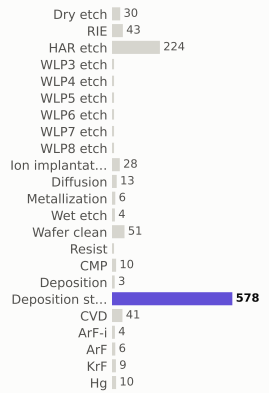

materials deposited (g)

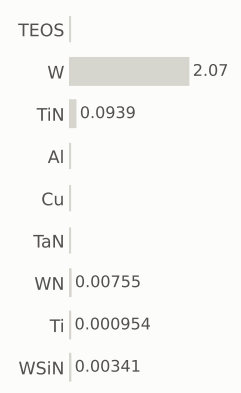

gases emitted (g)

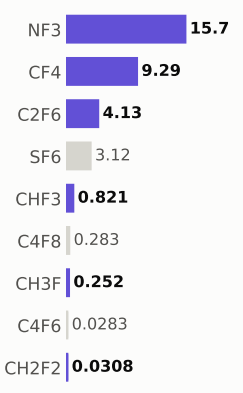

Step #14290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,432.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

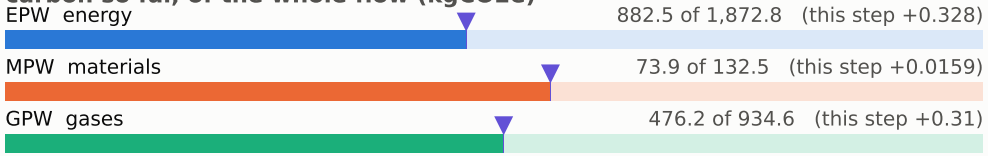

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

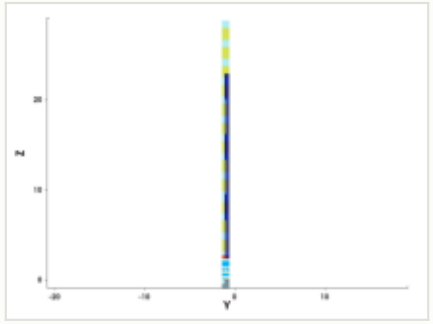

y cut at -1.035 µm

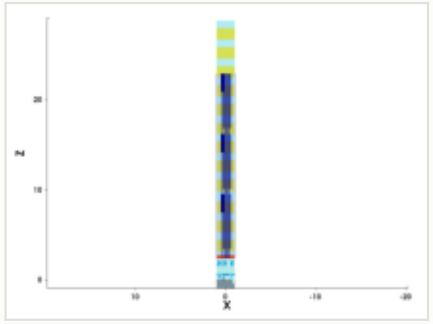

mask for this step

no mask for this step

steps by process area

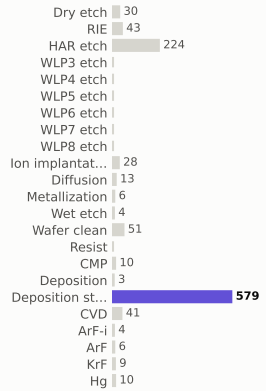

materials deposited (g)

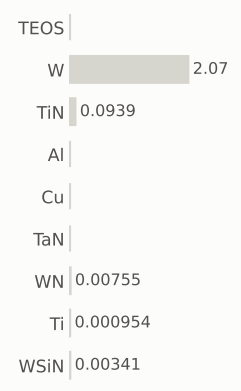

gases emitted (g)

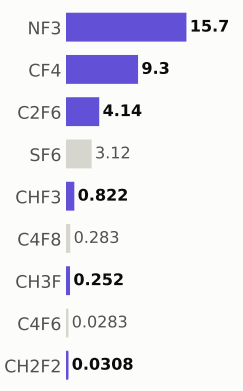

Step #14300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,433.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

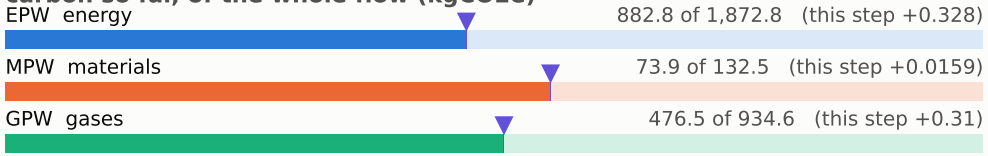

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

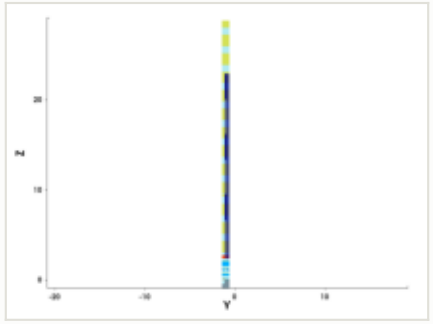

y cut at -1.035 µm

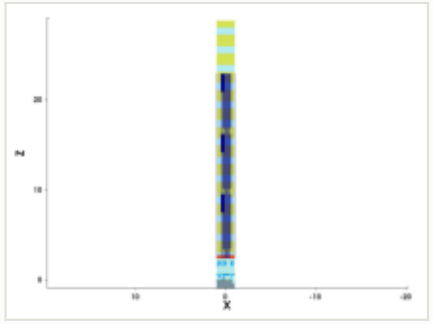

mask for this step

no mask for this step

steps by process area

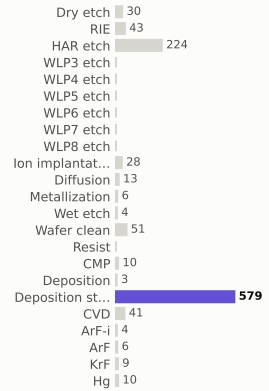

materials deposited (g)

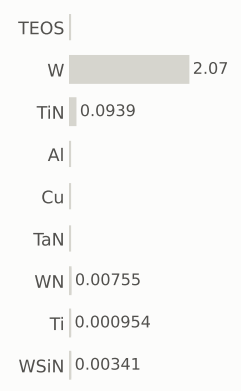

gases emitted (g)

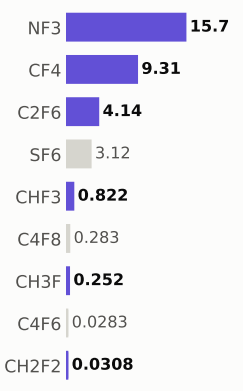

Step #14310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,433.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

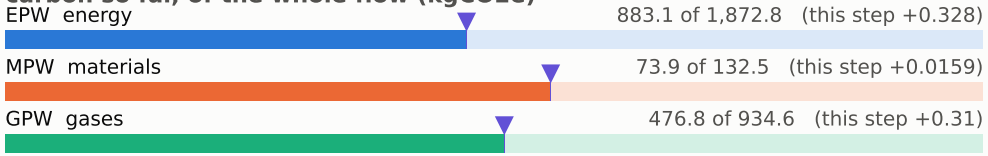

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

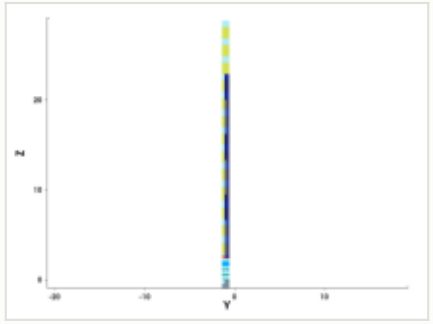

y cut at -1.035 µm

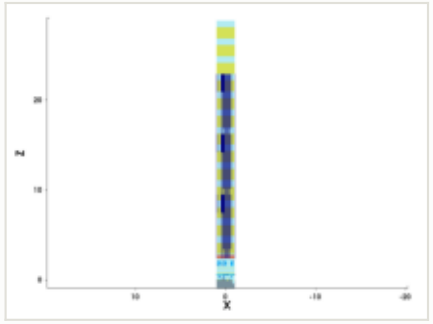

mask for this step

no mask for this step

steps by process area

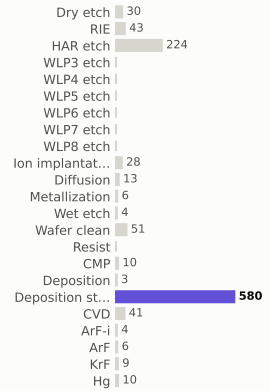

materials deposited (g)

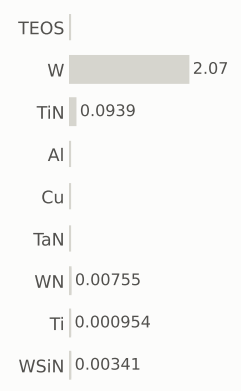

gases emitted (g)

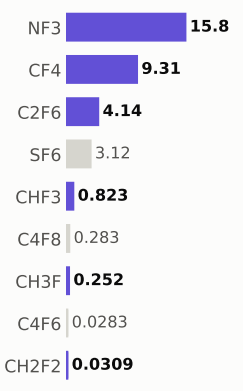

Step #14320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,434.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

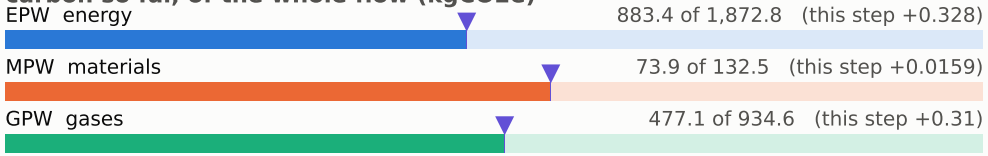

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

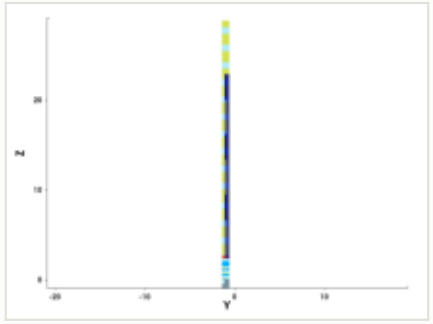

y cut at -1.035 µm

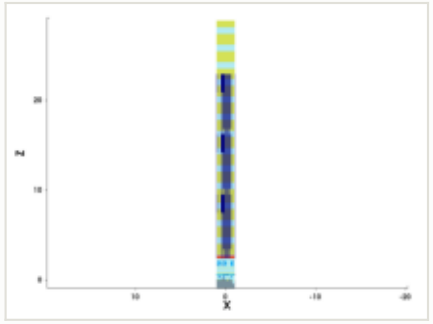

mask for this step

no mask for this step

steps by process area

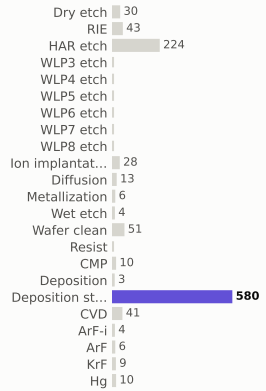

materials deposited (g)

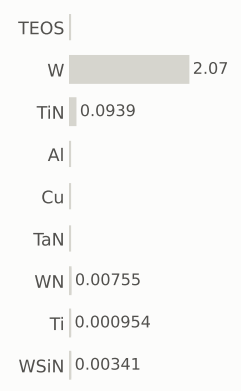

gases emitted (g)

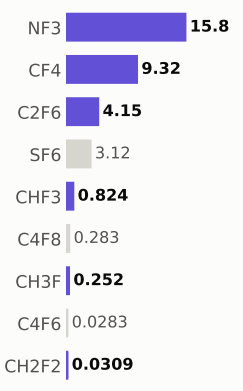

Step #14330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,435.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

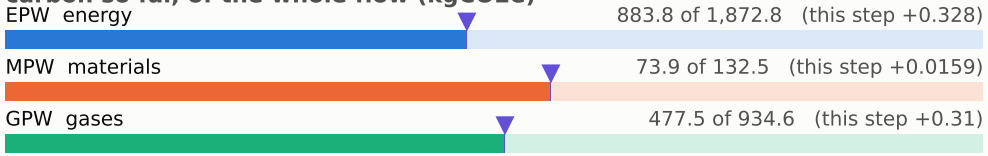

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

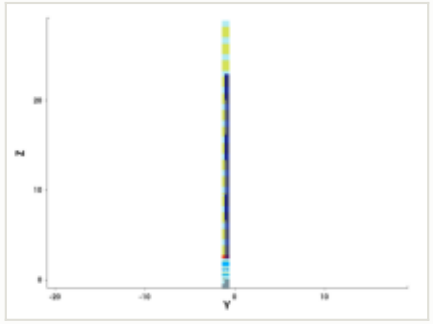

y cut at -1.035 µm

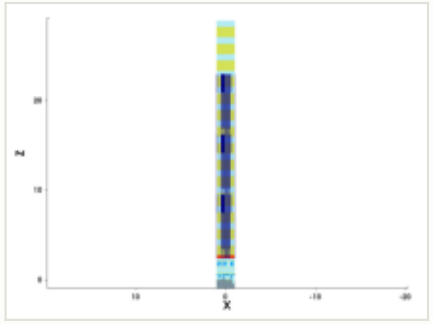

mask for this step

no mask for this step

steps by process area

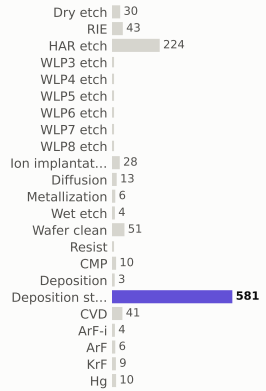

materials deposited (g)

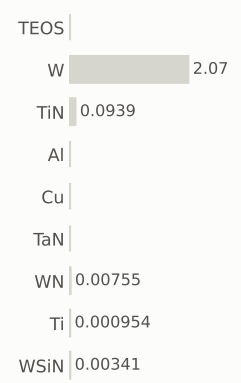

gases emitted (g)

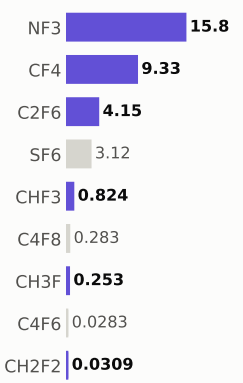

Step #14340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,435.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

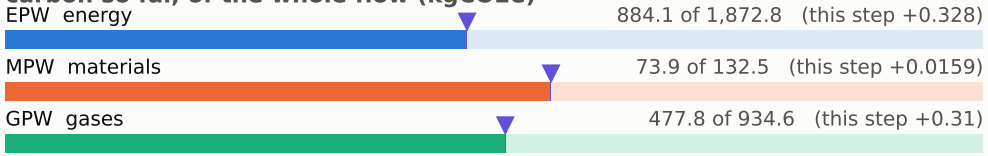

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

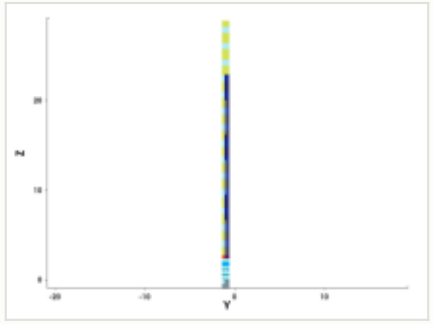

y cut at -1.035 µm

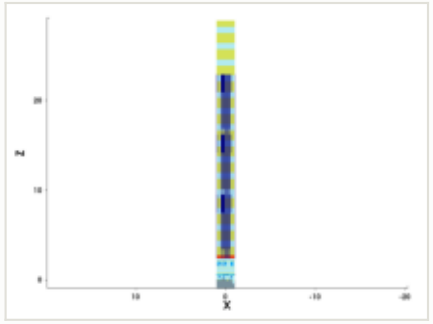

mask for this step

no mask for this step

steps by process area

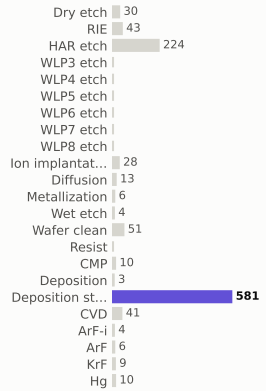

materials deposited (g)

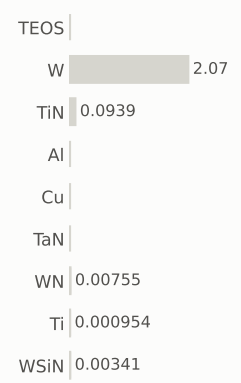

gases emitted (g)

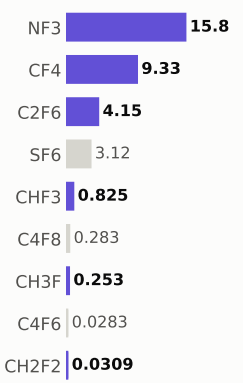

Step #14350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,436.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

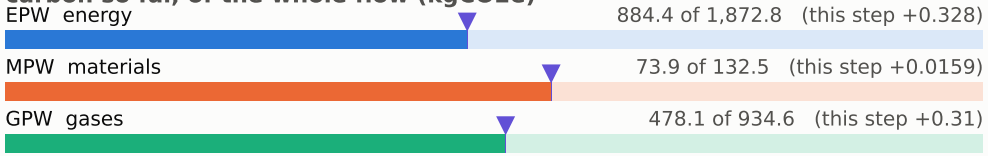

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

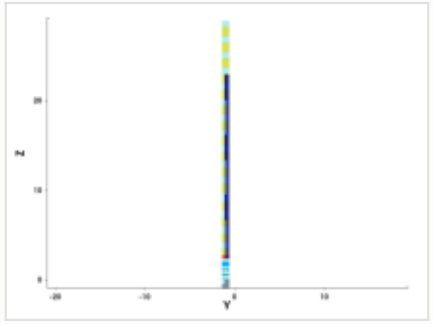

y cut at -1.035 µm

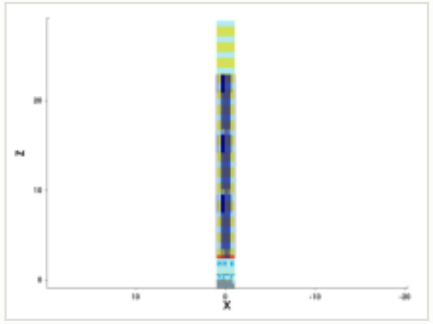

mask for this step

no mask for this step

steps by process area

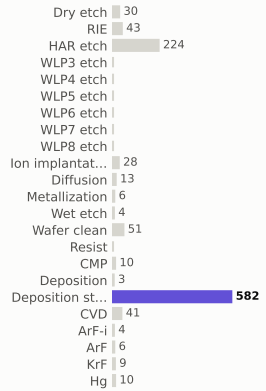

materials deposited (g)

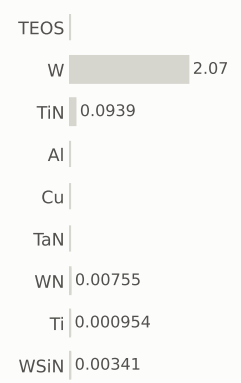

gases emitted (g)

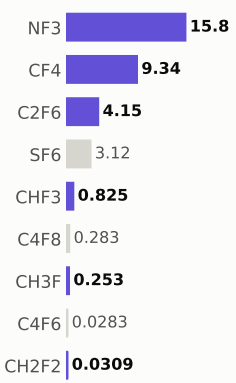

Step #14360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,437.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

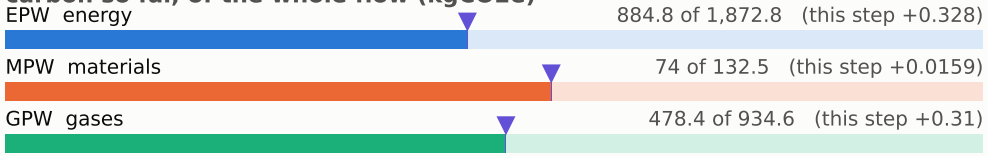

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

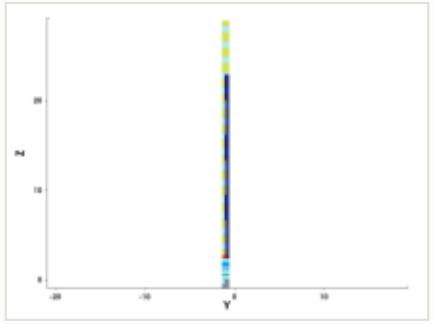

y cut at -1.035 µm

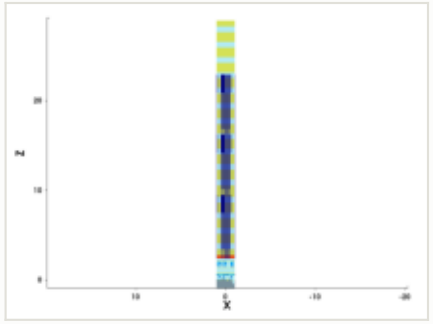

mask for this step

no mask for this step

steps by process area

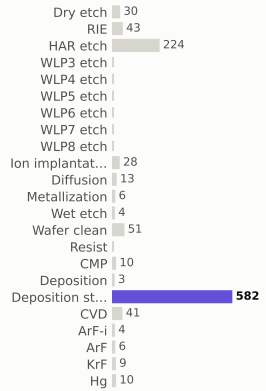

materials deposited (g)

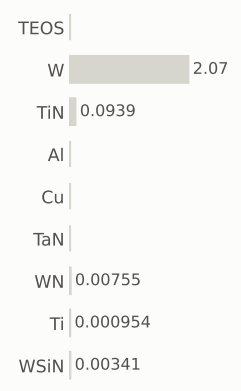

gases emitted (g)

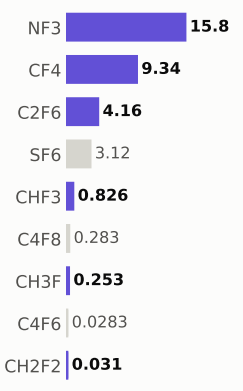

Step #14370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,437.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

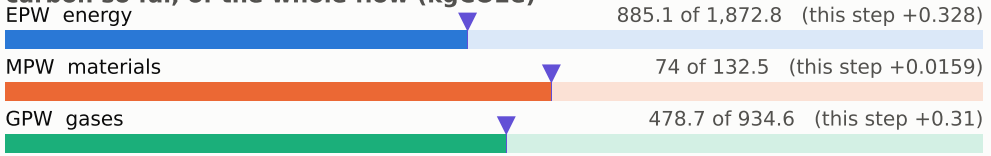

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

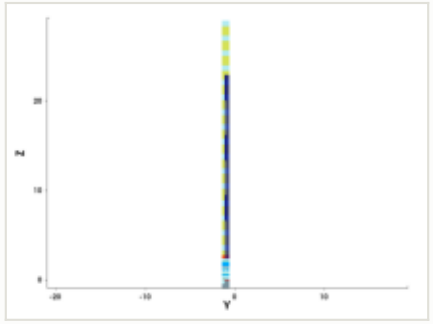

y cut at -1.035 µm

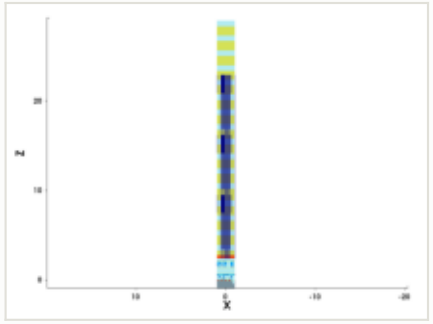

mask for this step

no mask for this step

steps by process area

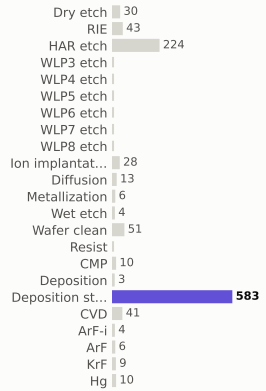

materials deposited (g)

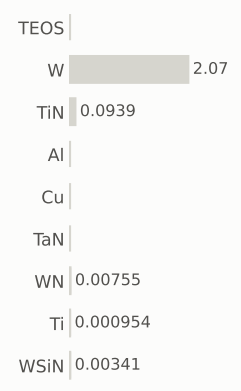

gases emitted (g)

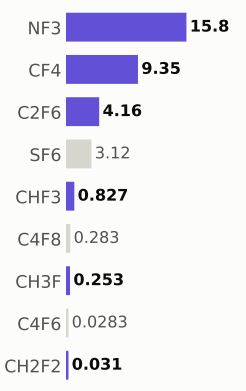

Step #14380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,438.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

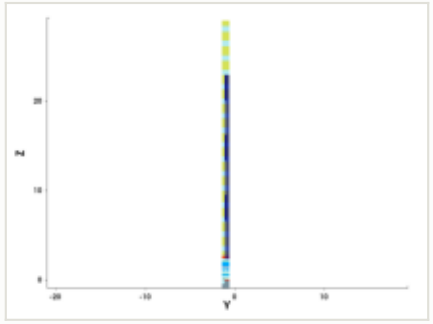

y cut at -1.035 µm

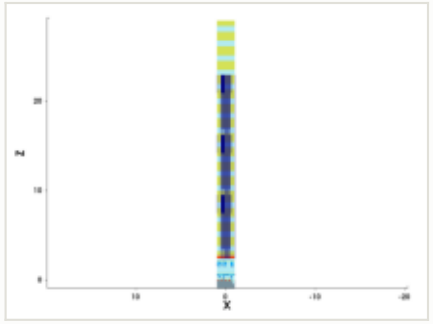

mask for this step

no mask for this step

steps by process area

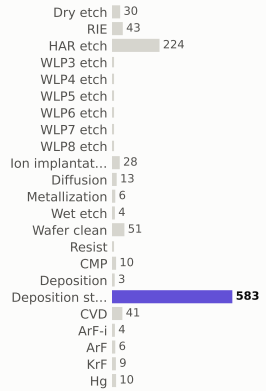

materials deposited (g)

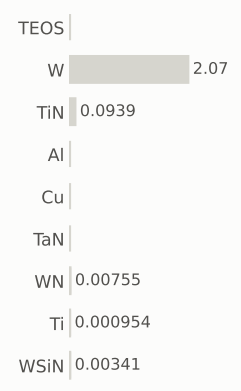

gases emitted (g)

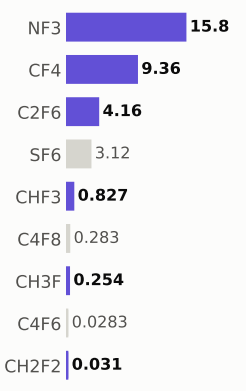

Step #14390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,439.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

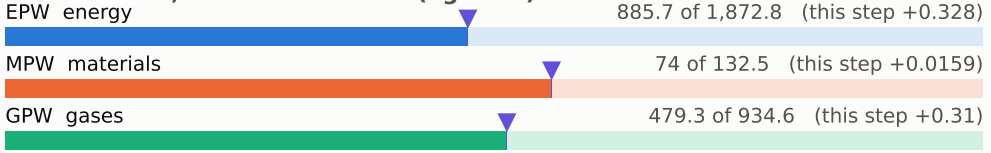

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

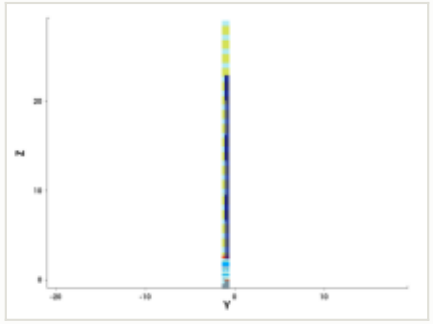

y cut at -1.035 µm

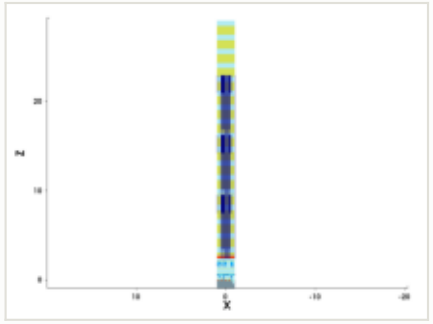

mask for this step

no mask for this step

steps by process area

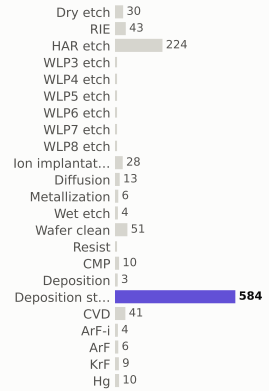

materials deposited (g)

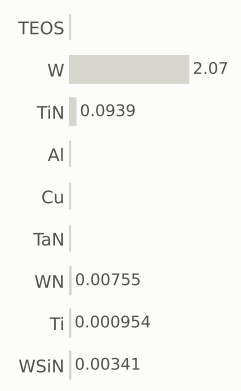

gases emitted (g)

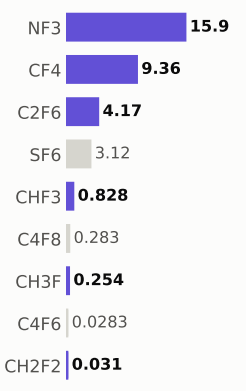

Step #14400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,439.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

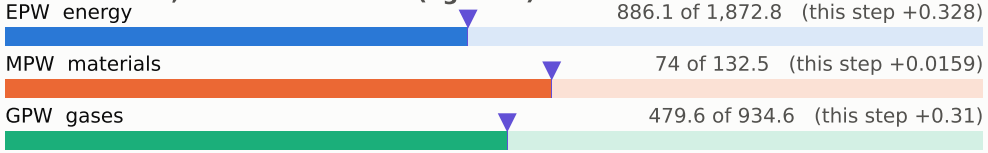

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

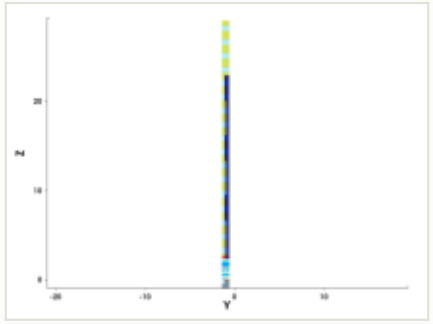

y cut at -1.035 µm

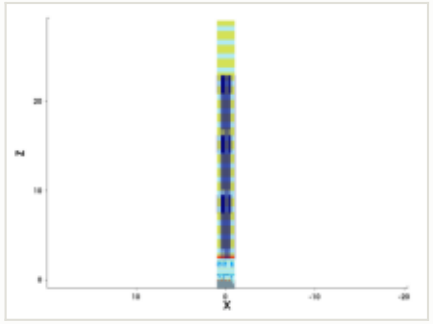

mask for this step

no mask for this step

steps by process area

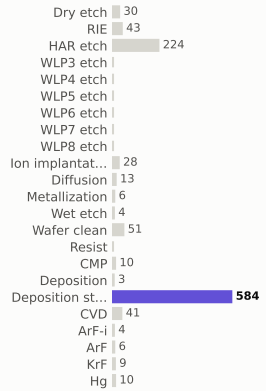

materials deposited (g)

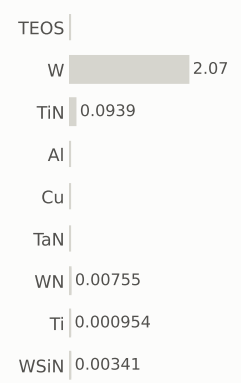

gases emitted (g)

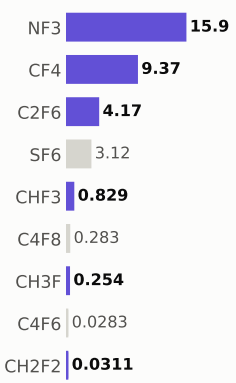

Step #14410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,440.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

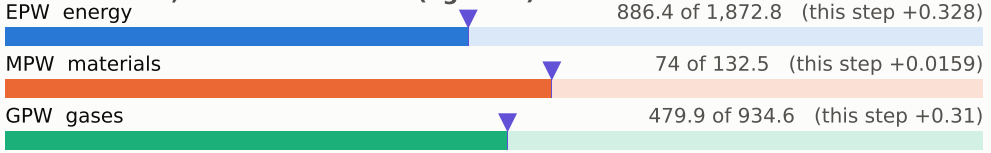

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

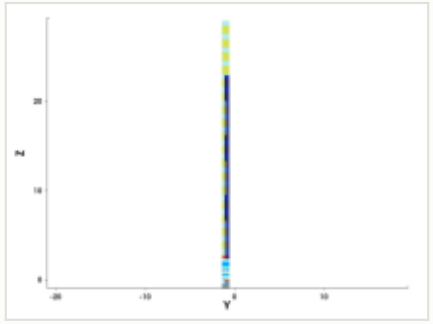

y cut at -1.035 µm

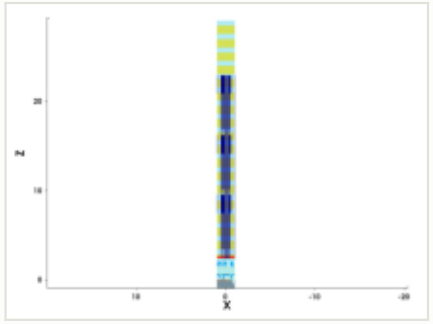

mask for this step

no mask for this step

steps by process area

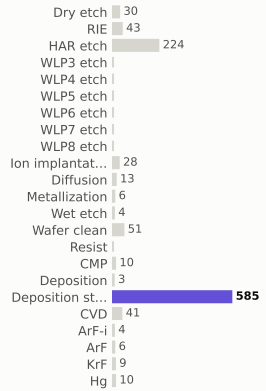

materials deposited (g)

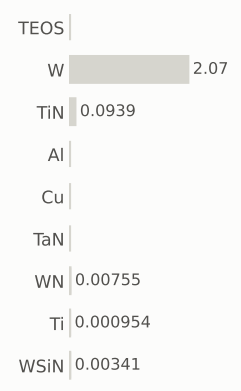

gases emitted (g)

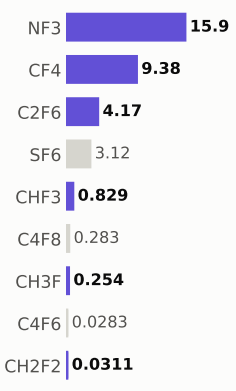

Step #14420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,441.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

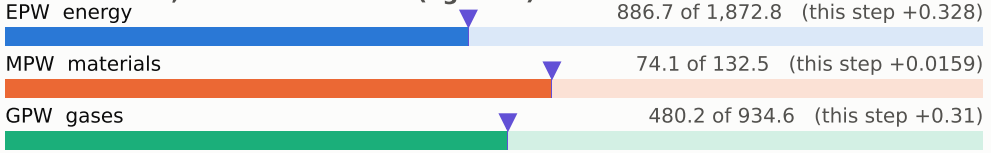

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

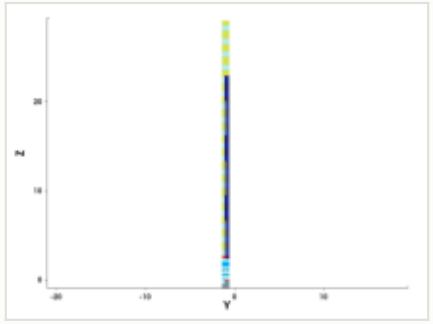

y cut at -1.035 µm

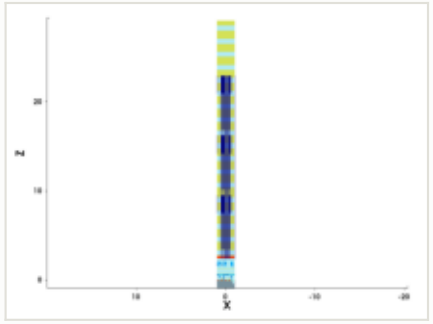

mask for this step

no mask for this step

steps by process area

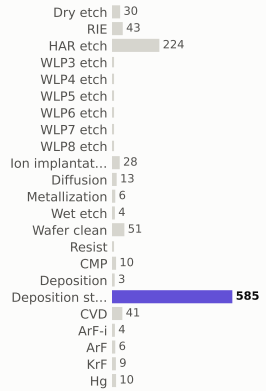

materials deposited (g)

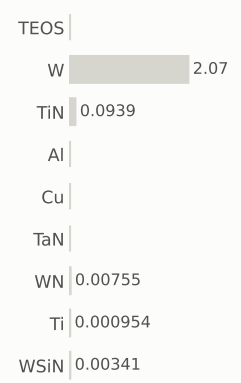

gases emitted (g)

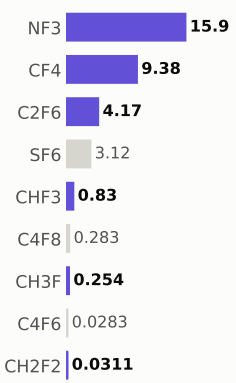

Step #14430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,441.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

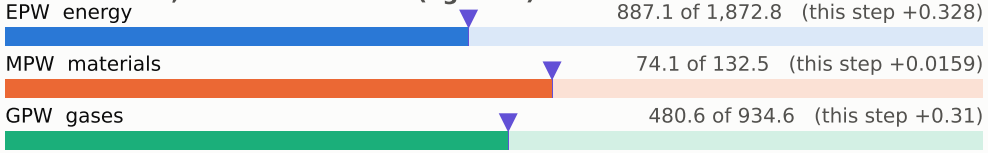

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

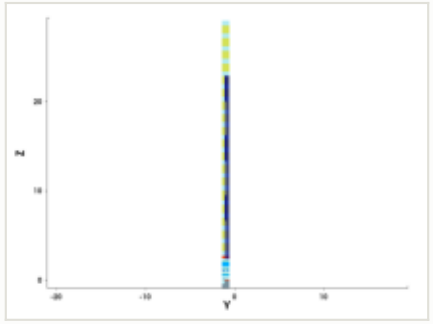

y cut at -1.035 µm

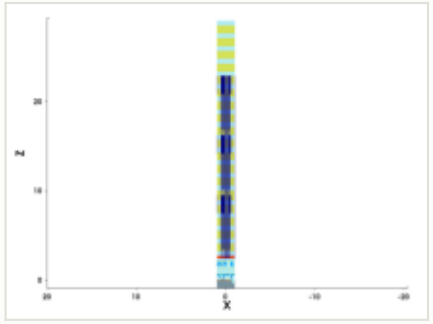

mask for this step

no mask for this step

steps by process area

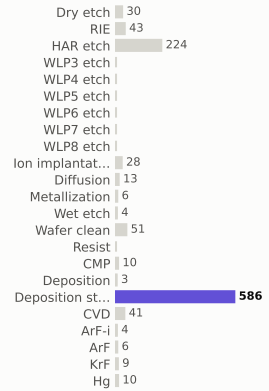

materials deposited (g)

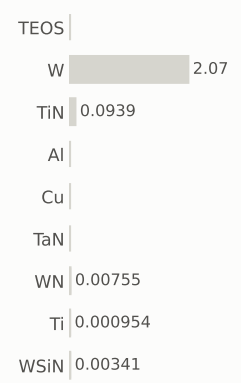

gases emitted (g)

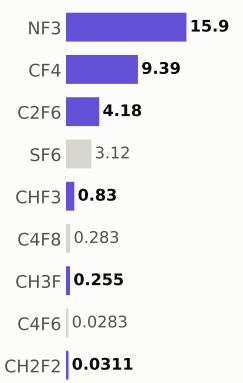

Step #14440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,442.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

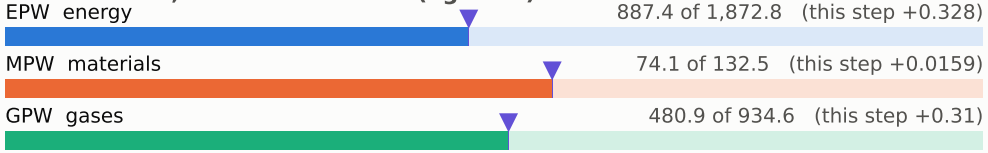

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

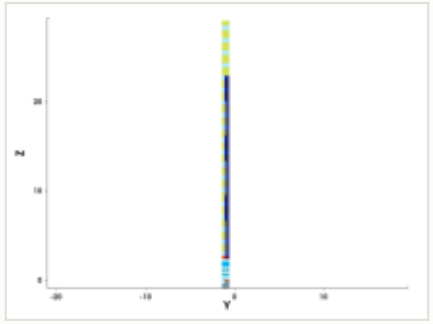

y cut at -1.035 µm

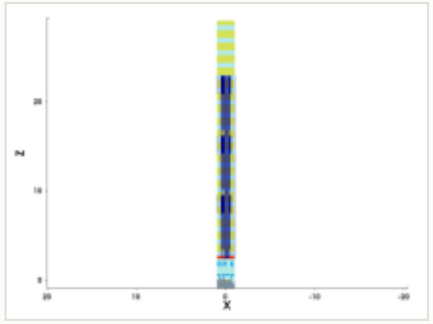

mask for this step

no mask for this step

steps by process area

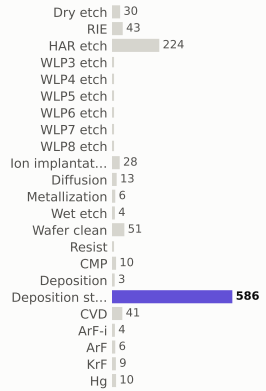

materials deposited (g)

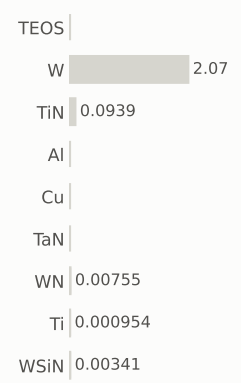

gases emitted (g)

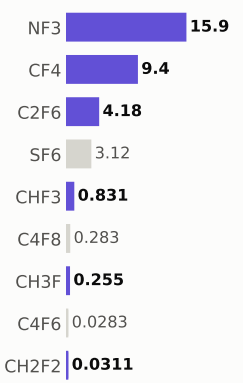

Step #14450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,443.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

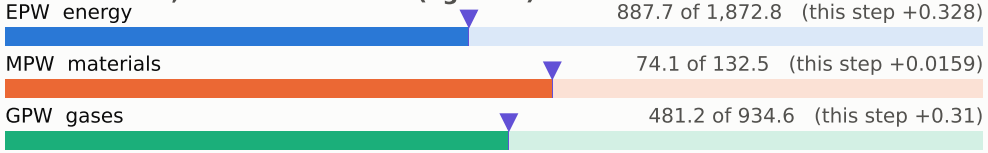

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

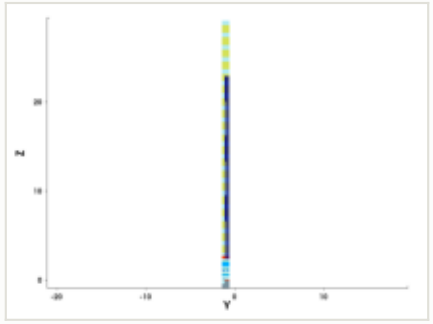

y cut at -1.035 µm

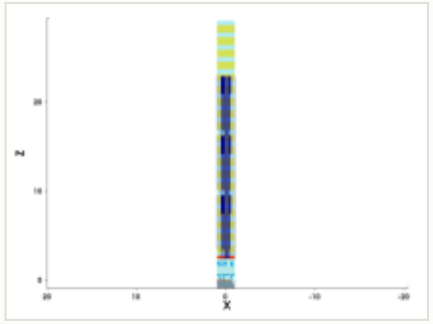

mask for this step

no mask for this step

steps by process area

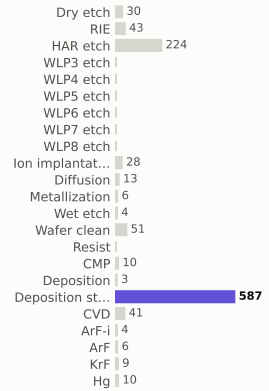

materials deposited (g)

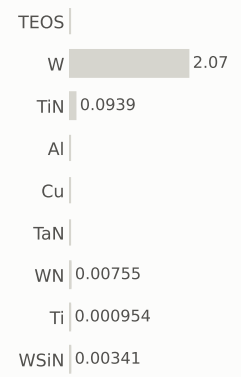

gases emitted (g)

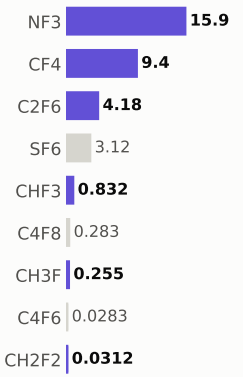

Step #14460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,443.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

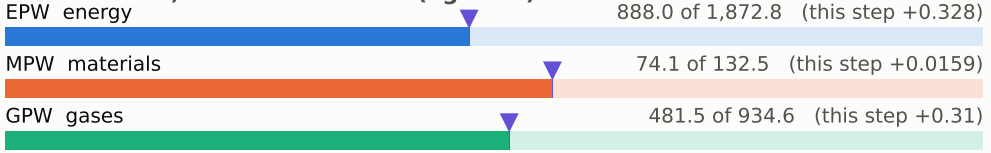

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

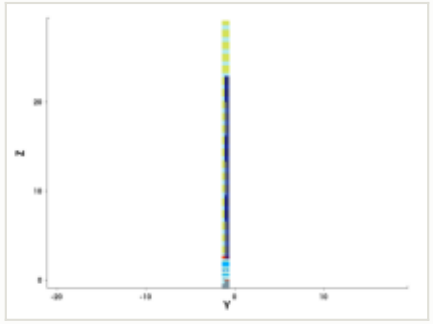

y cut at -1.035 µm

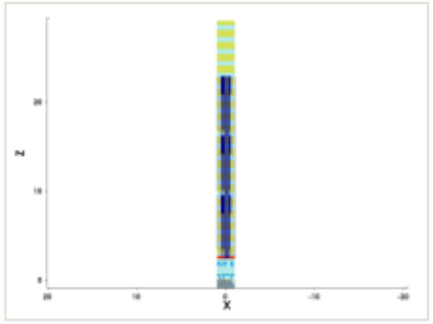

mask for this step

no mask for this step

steps by process area

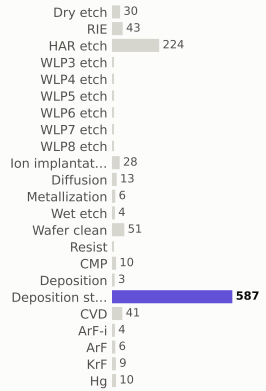

materials deposited (g)

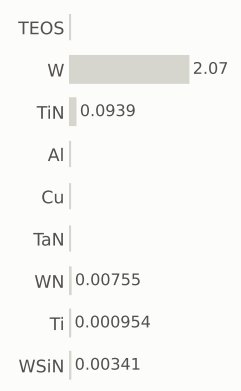

gases emitted (g)



Step #14470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,444.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

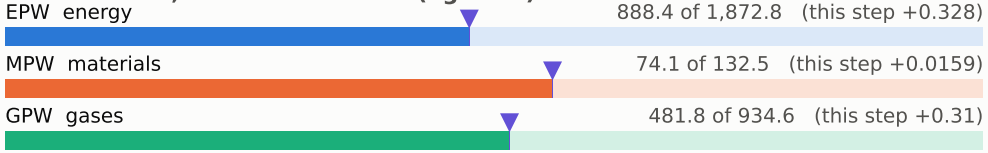

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

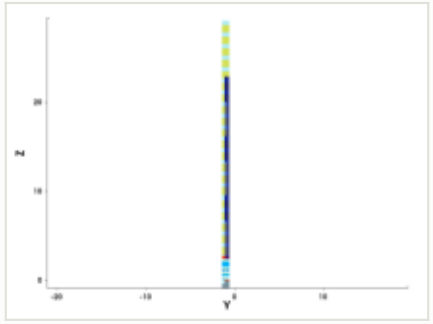

y cut at -1.035 µm

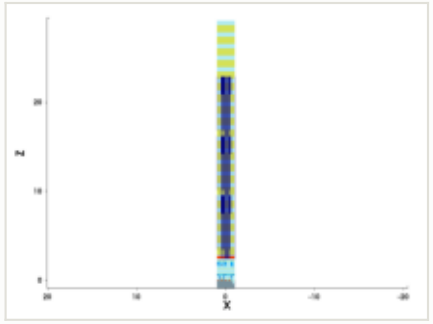

mask for this step

no mask for this step

steps by process area

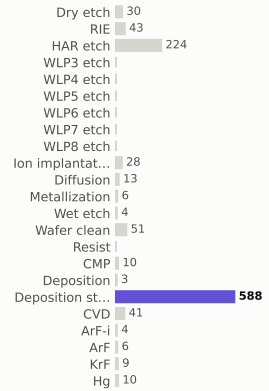

materials deposited (g)

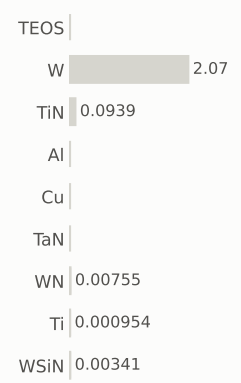

gases emitted (g)

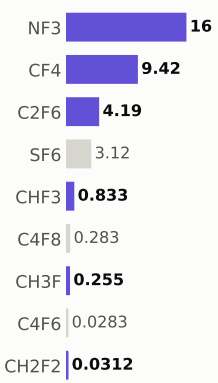

Step #14480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,444.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

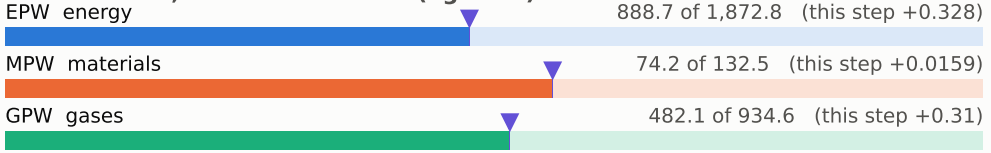

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

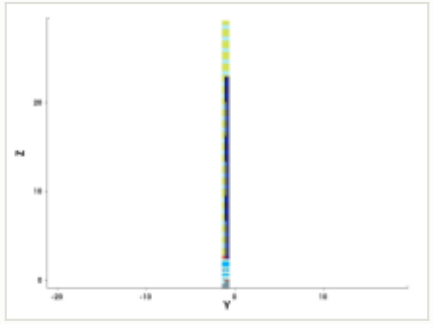

y cut at -1.035 µm

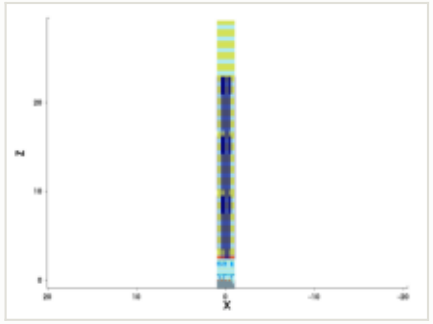

mask for this step

no mask for this step

steps by process area

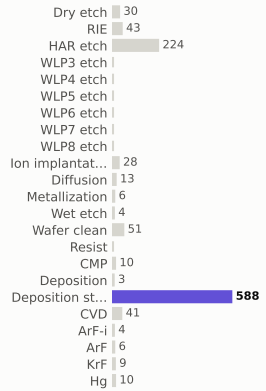

materials deposited (g)

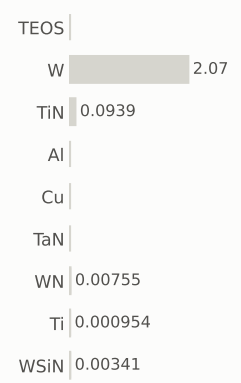

gases emitted (g)

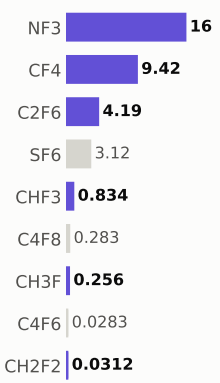

Step #14490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,445.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

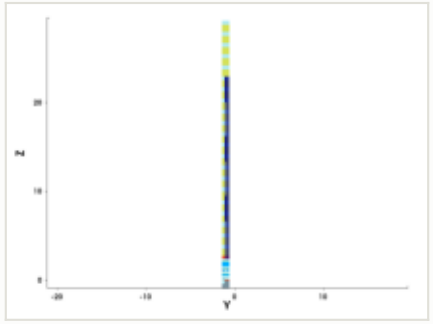

y cut at -1.035 µm

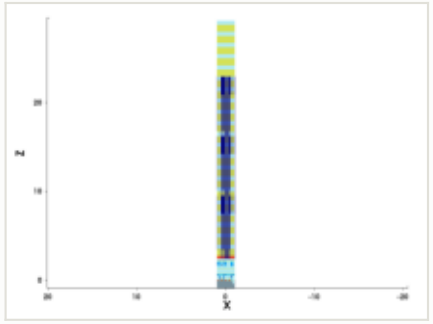

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

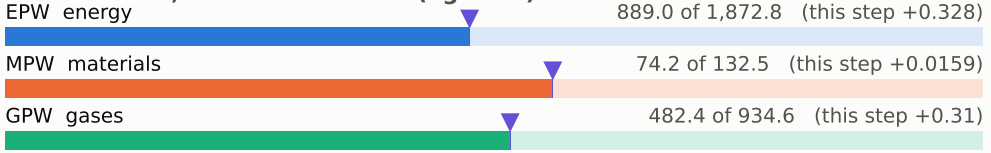

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

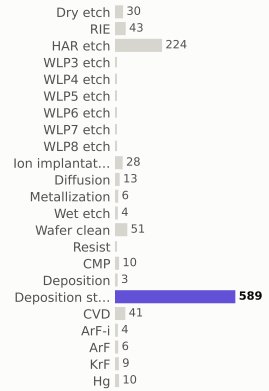

materials deposited (g)

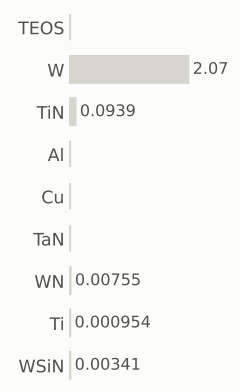

gases emitted (g)

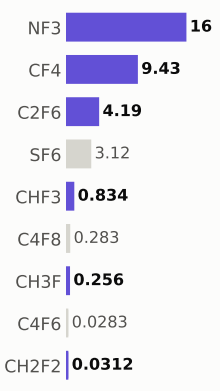

Step #14500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,446.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

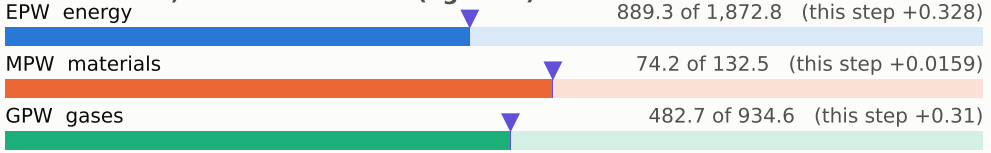

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

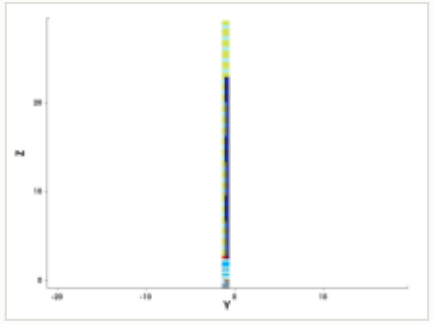

y cut at -1.035 µm

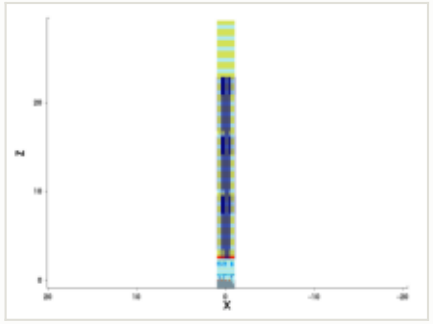

mask for this step

no mask for this step

steps by process area

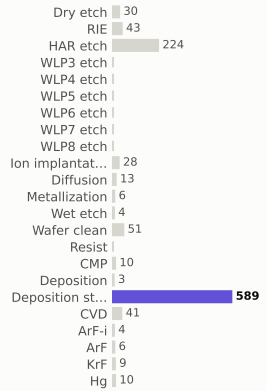

materials deposited (g)

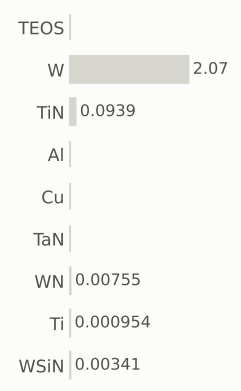

gases emitted (g)

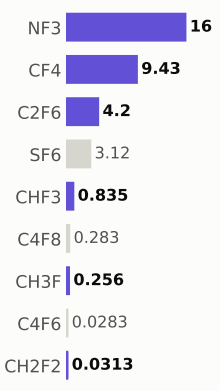

Step #14510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,446.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

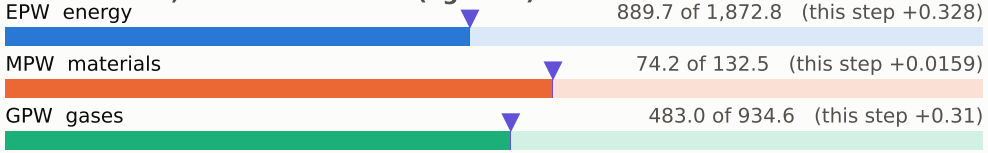

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

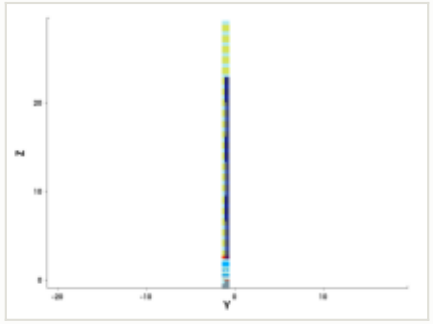

y cut at -1.035 µm

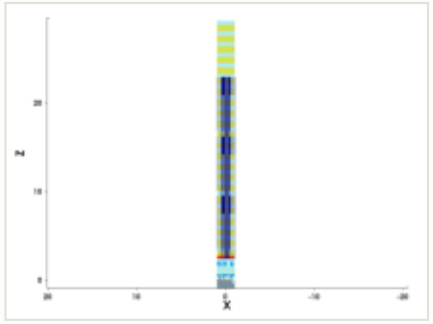

mask for this step

no mask for this step

steps by process area

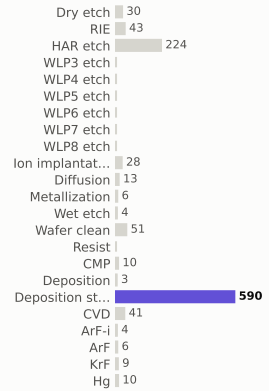

materials deposited (g)

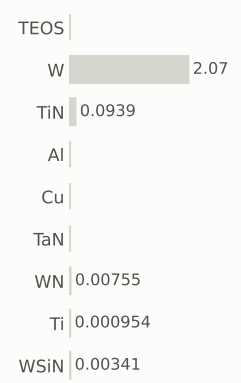

gases emitted (g)

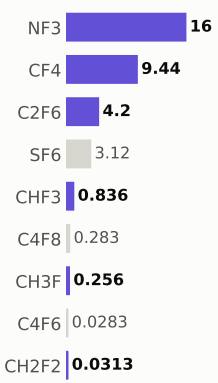

Step #14520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,447.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

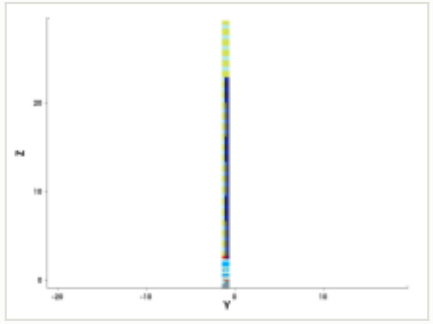

y cut at -1.035 µm

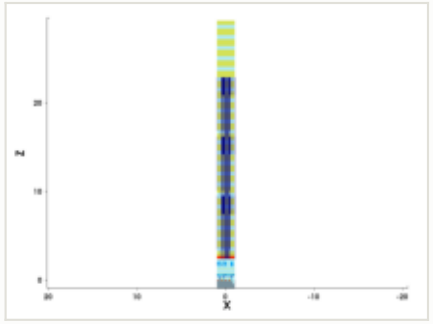

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

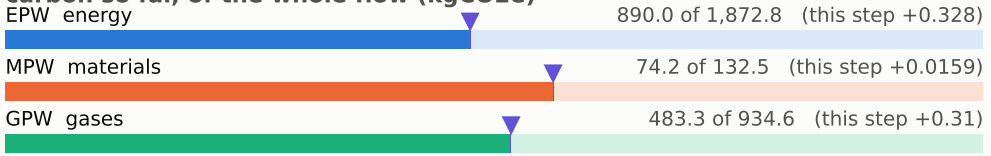

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

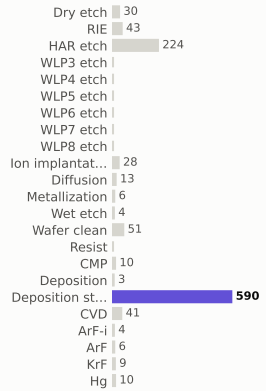

materials deposited (g)

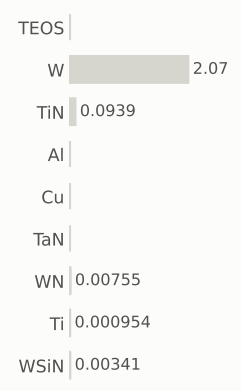

gases emitted (g)

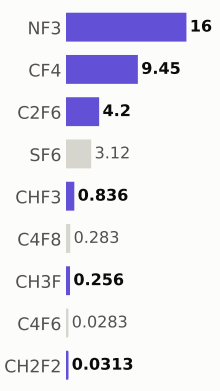

Step #14530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,448.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

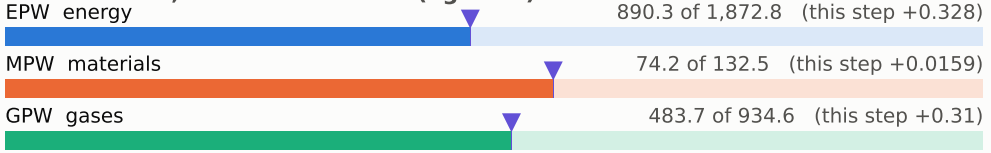

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

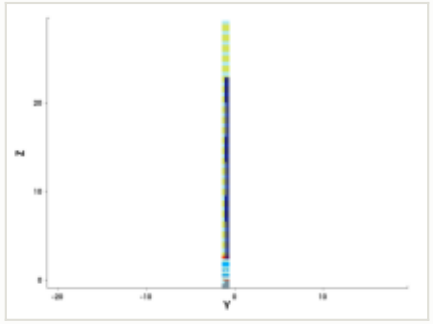

y cut at -1.035 µm

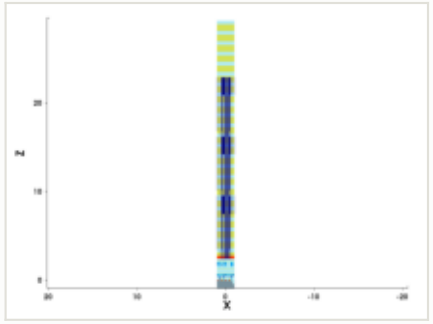

mask for this step

no mask for this step

steps by process area

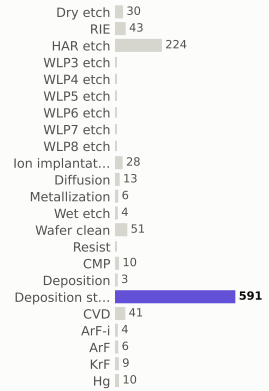

materials deposited (g)

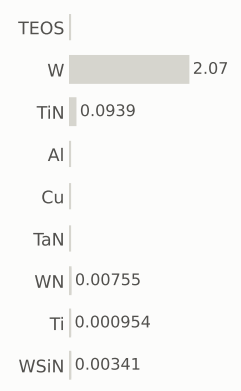

gases emitted (g)

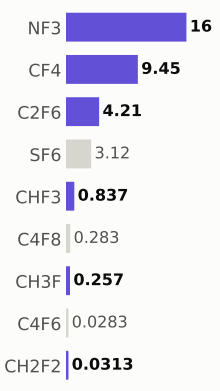

Step #14540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,448.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 890.7 of 1,872.8 (this step +0.328)

MPW materials — 74.2 of 132.5 (this step +0.0159)

GPW gases — 484.0 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

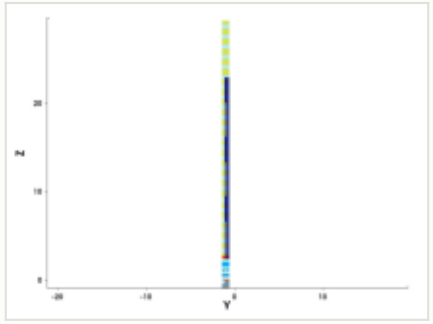

y cut at -1.035 µm

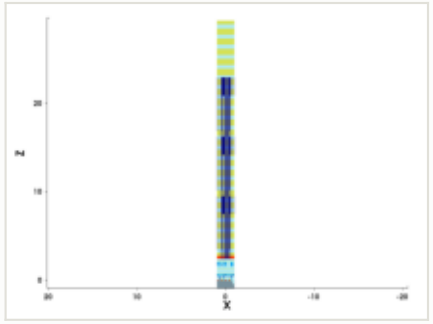

mask for this step

no mask for this step

steps by process area

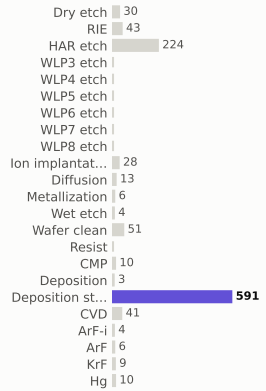

materials deposited (g)

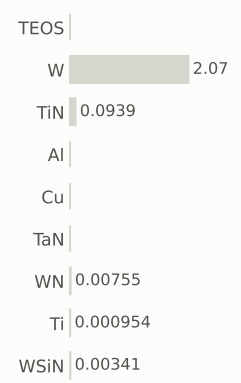

gases emitted (g)

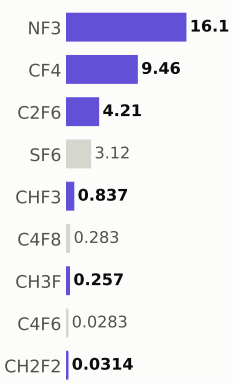

Step #14550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,449.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

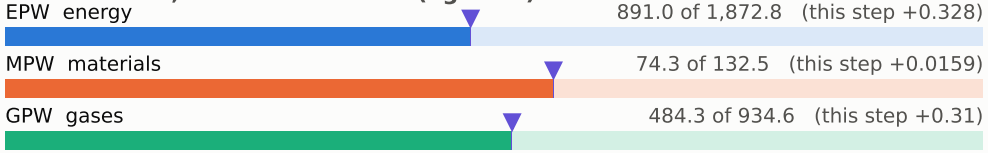

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

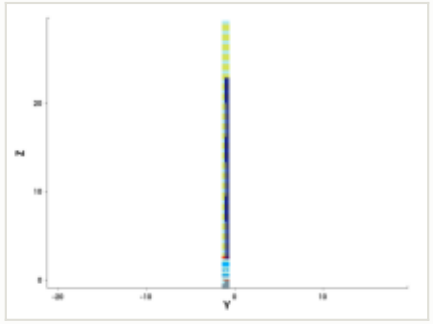

y cut at -1.035 µm

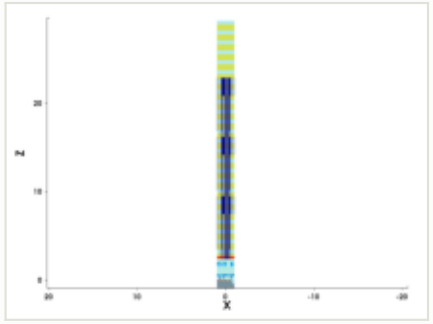

mask for this step

no mask for this step

steps by process area

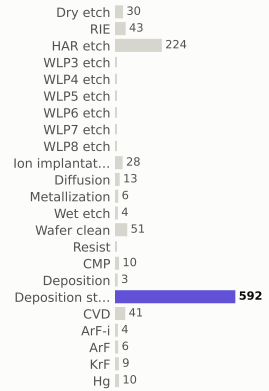

materials deposited (g)

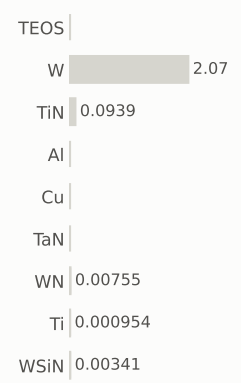

gases emitted (g)

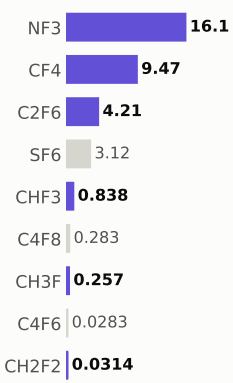

Step #14560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,450.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

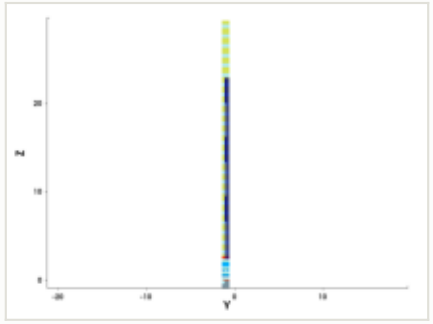

y cut at -1.035 µm

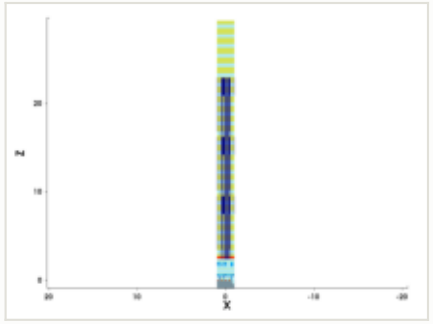

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

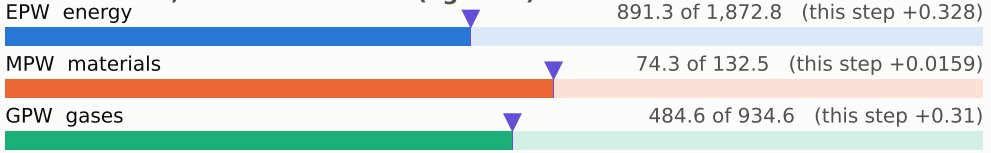

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

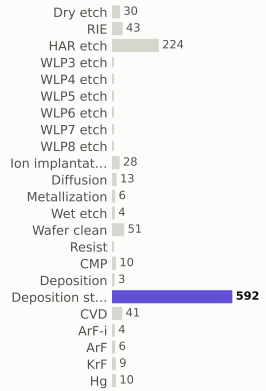

materials deposited (g)

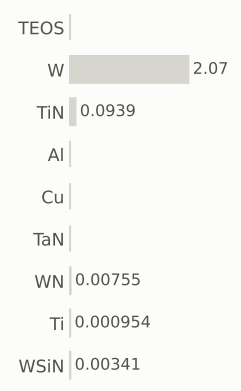

gases emitted (g)

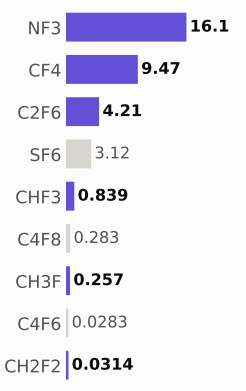

Step #14570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,450.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

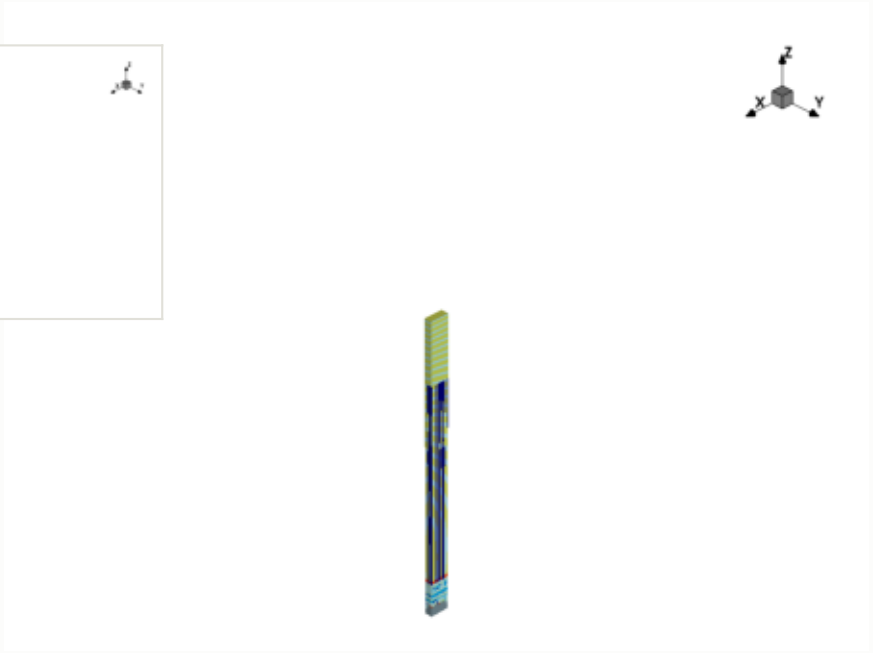

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

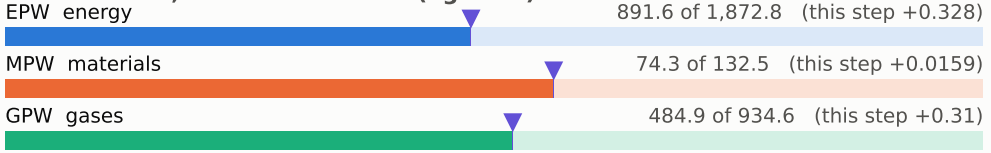

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

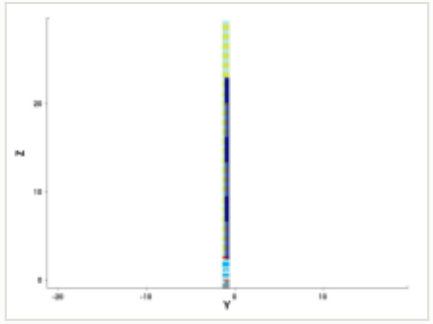

y cut at -1.035 µm

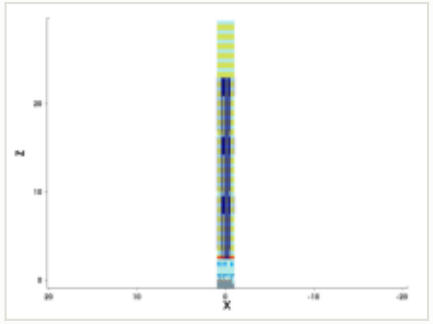

mask for this step

no mask for this step

steps by process area

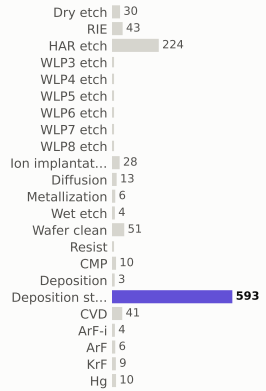

materials deposited (g)

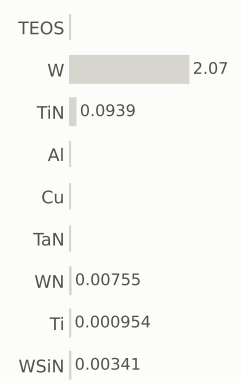

gases emitted (g)

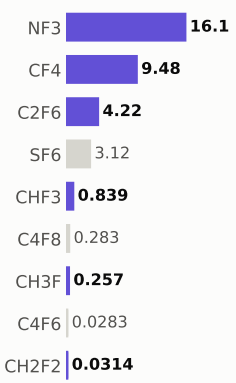

Step #14580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,451.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

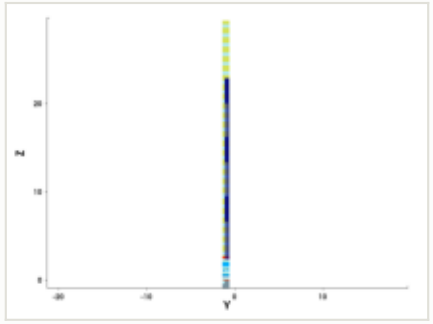

y cut at -1.035 µm

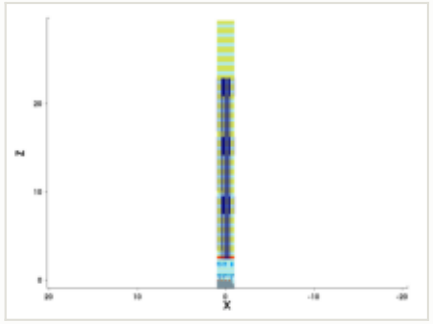

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

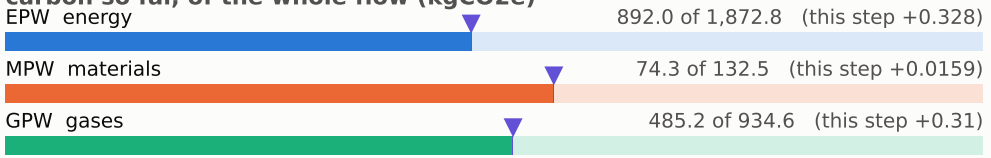

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

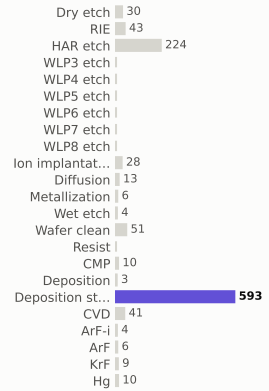

materials deposited (g)

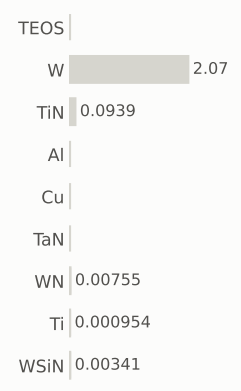

gases emitted (g)

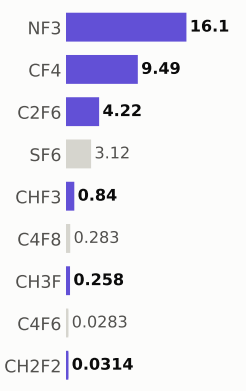

Step #14590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,452.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

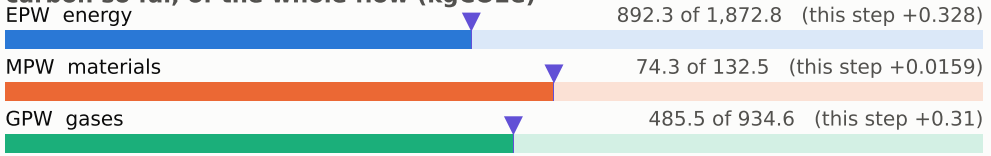

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

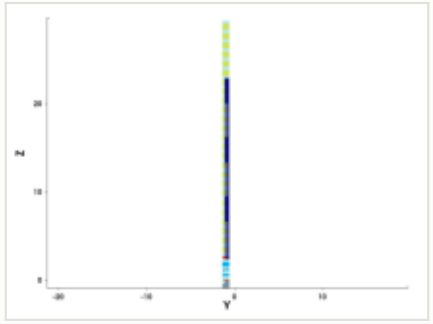

y cut at -1.035 µm

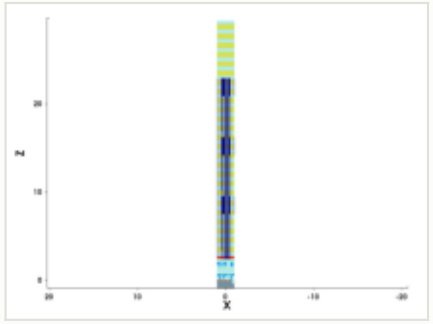

mask for this step

no mask for this step

steps by process area

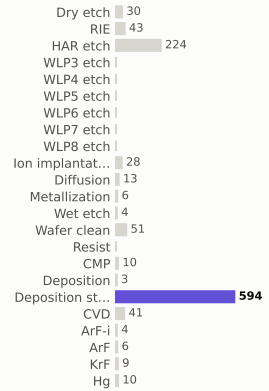

materials deposited (g)

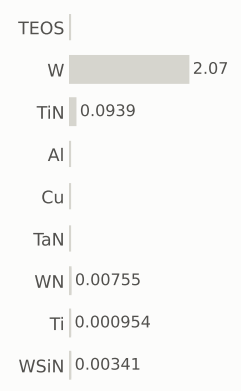

gases emitted (g)

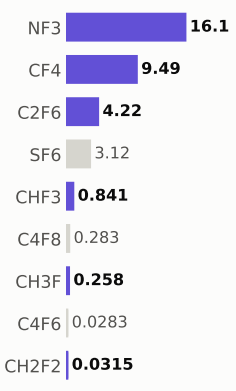

Step #14600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,452.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

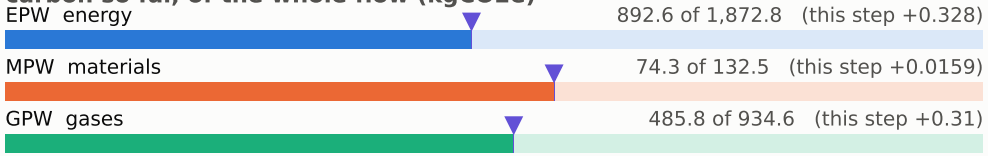

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

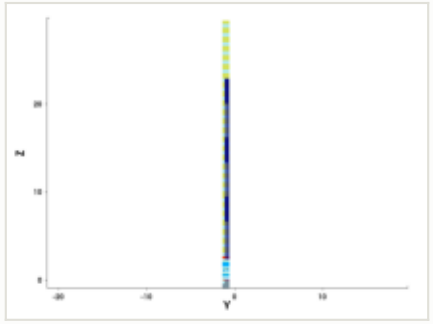

y cut at -1.035 µm

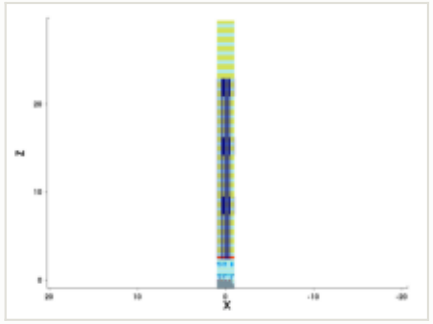

mask for this step

no mask for this step

steps by process area

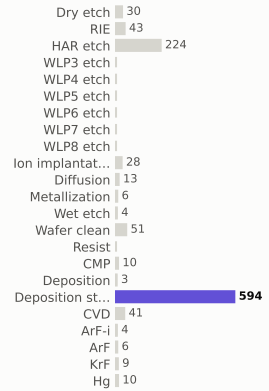

materials deposited (g)

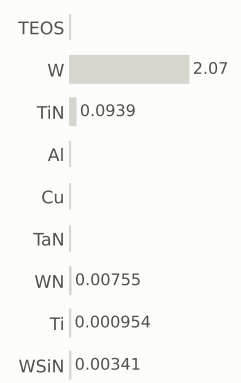

gases emitted (g)

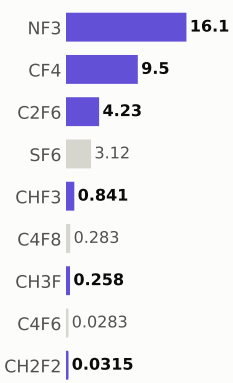

Step #14610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,453.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

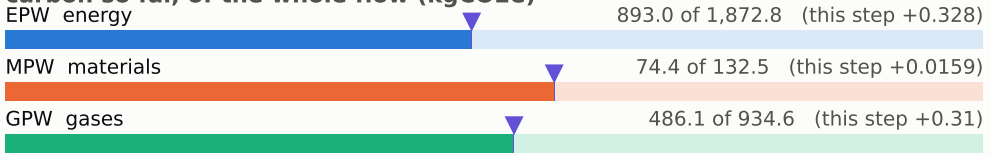

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

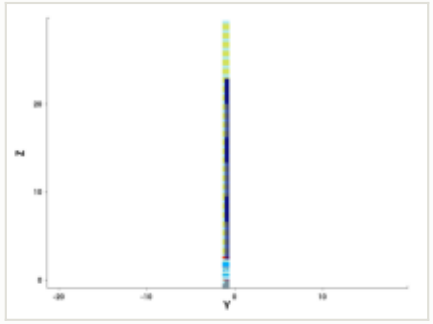

y cut at -1.035 µm

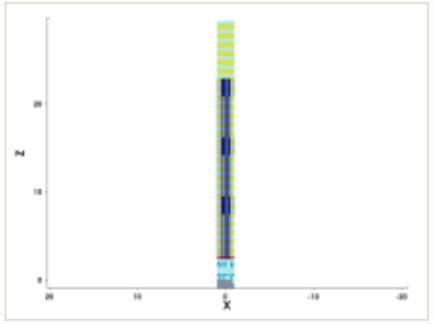

mask for this step

no mask for this step

steps by process area

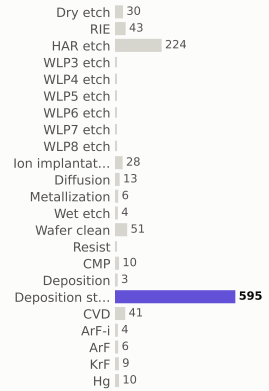

materials deposited (g)

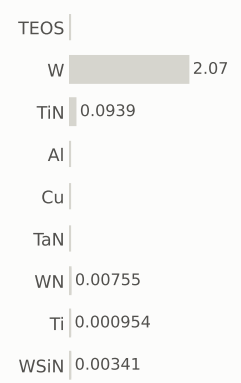

gases emitted (g)

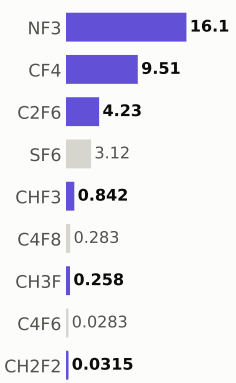

Step #14620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,454.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

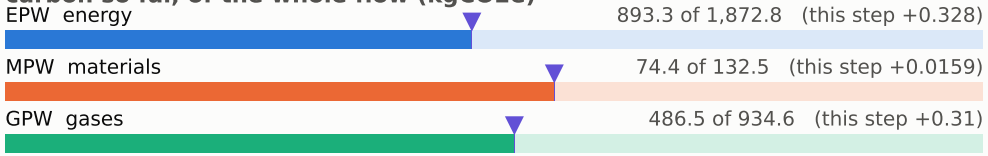

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

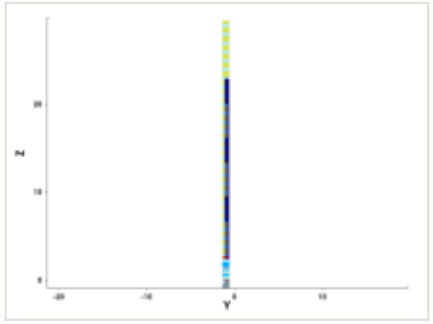

y cut at -1.035 µm

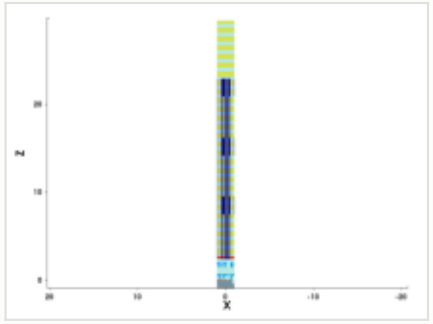

mask for this step

no mask for this step

steps by process area

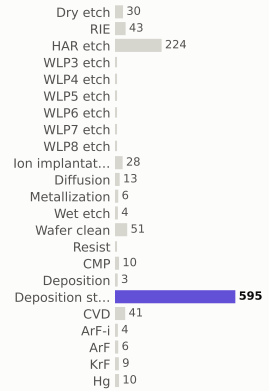

materials deposited (g)

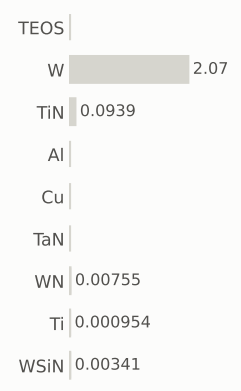

gases emitted (g)

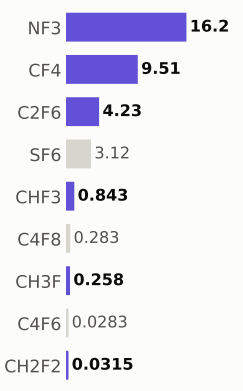

Step #14630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,454.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

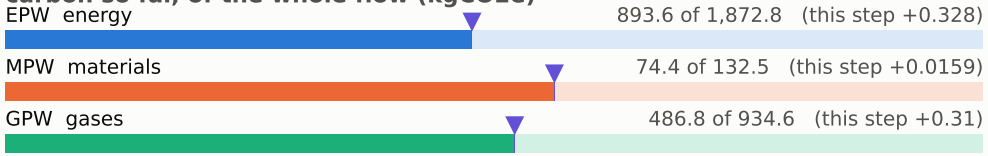

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

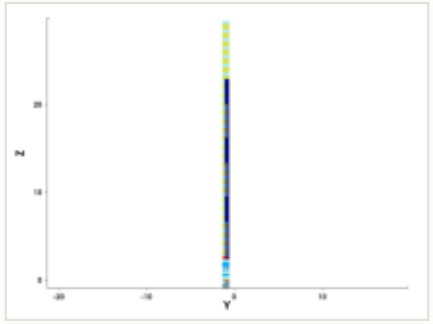

y cut at -1.035 µm

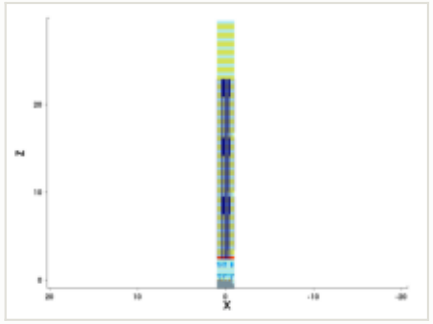

mask for this step

no mask for this step

steps by process area

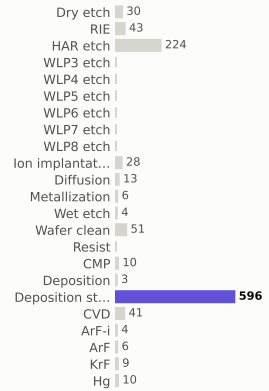

materials deposited (g)

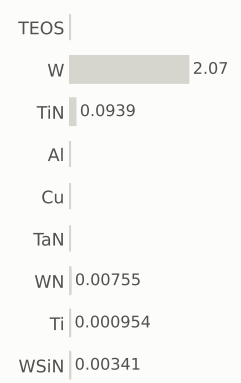

gases emitted (g)

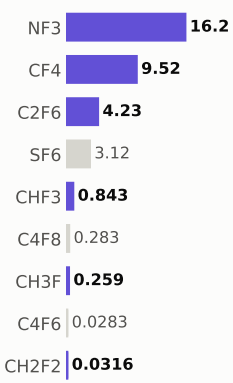

Step #14640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,455.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

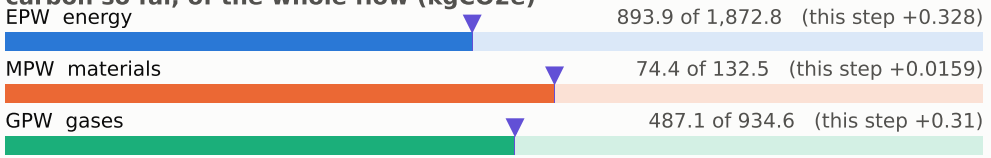

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

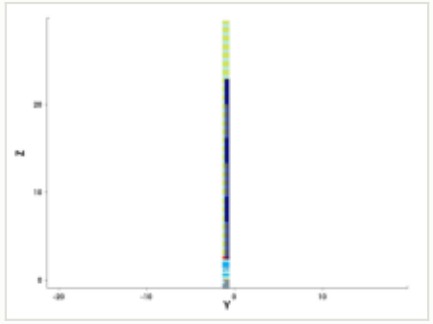

y cut at -1.035 µm

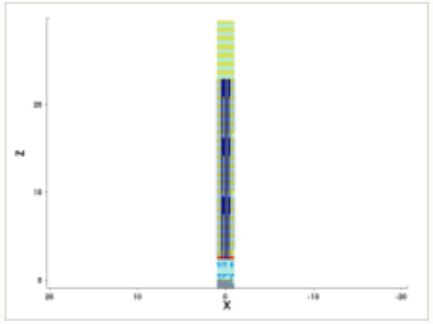

mask for this step

no mask for this step

steps by process area

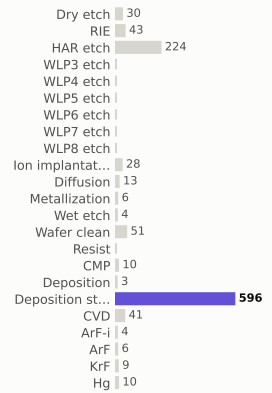

materials deposited (g)

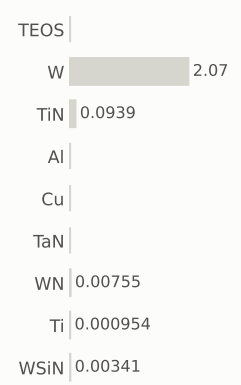

gases emitted (g)

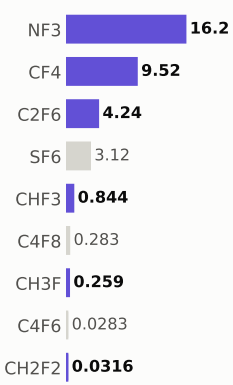

Step #14650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,456.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

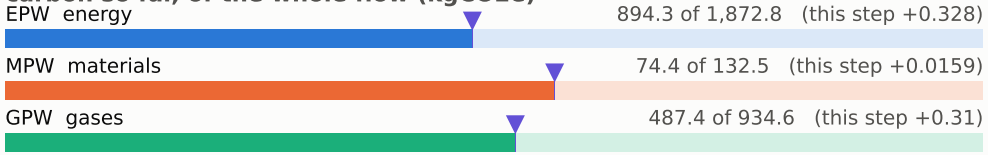

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

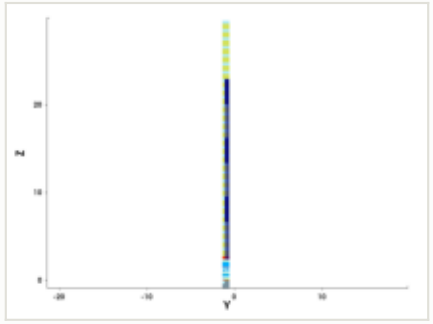

y cut at -1.035 µm

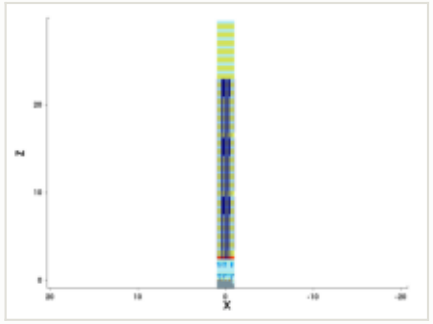

mask for this step

no mask for this step

steps by process area

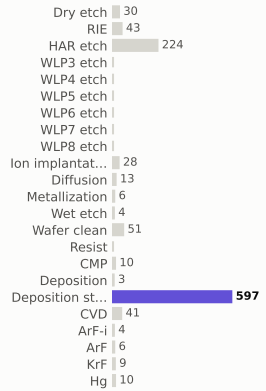

materials deposited (g)

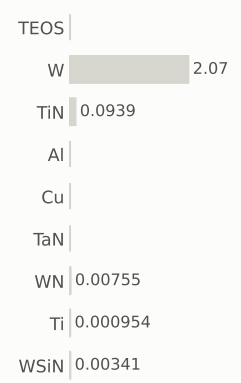

gases emitted (g)

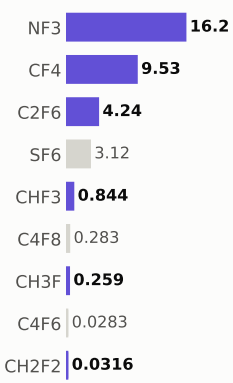

Step #14660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,456.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

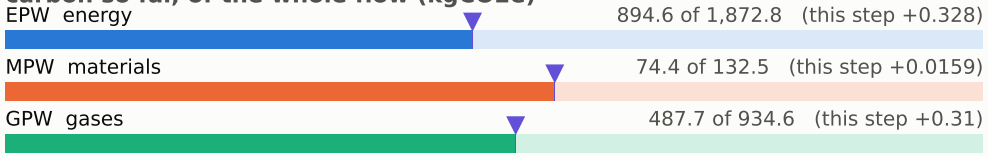

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

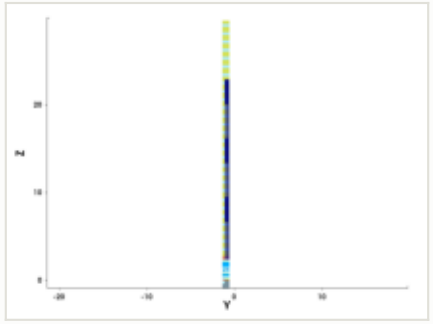

y cut at -1.035 µm

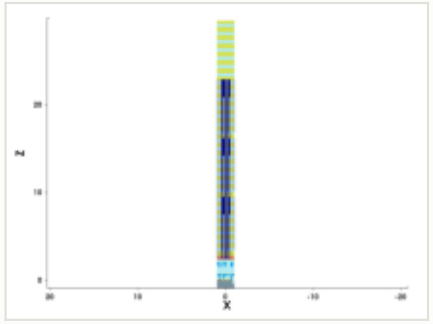

mask for this step

no mask for this step

steps by process area

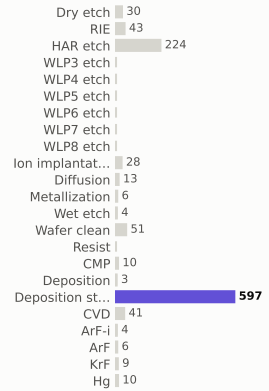

materials deposited (g)

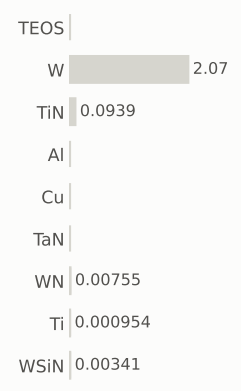

gases emitted (g)

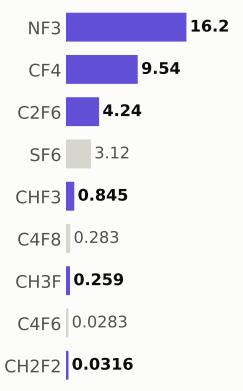

Step #14670: CVD

depo_isotropic · CVD

1.31	1,458.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

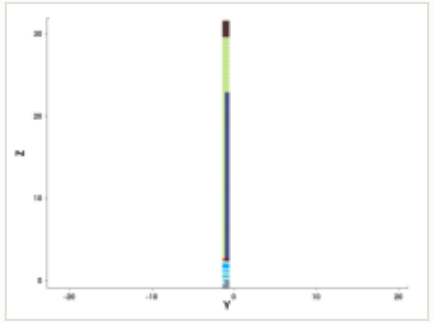

y cut at -1.035 µm

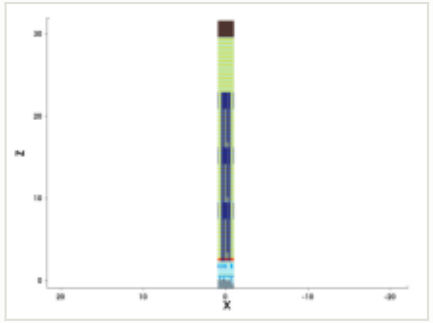

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

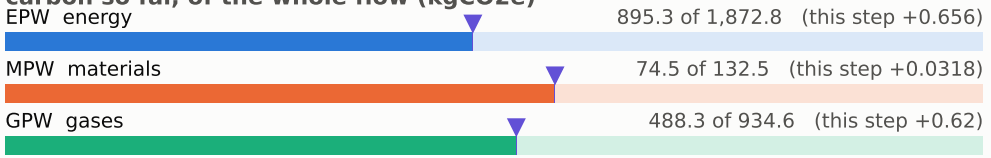

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

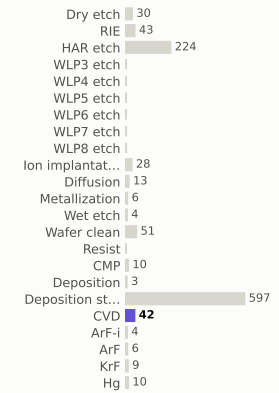

materials deposited (g)

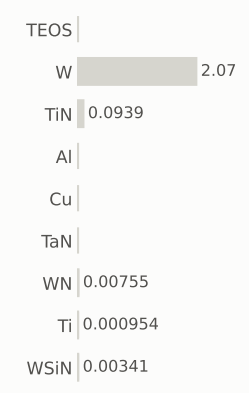

gases emitted (g)

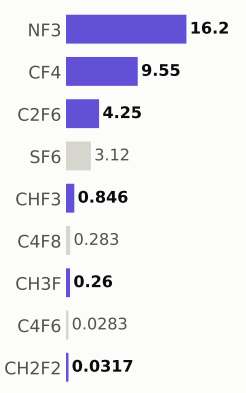

Step #14680: CVD

depo_isotropic · CVD

1.31	1,459.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

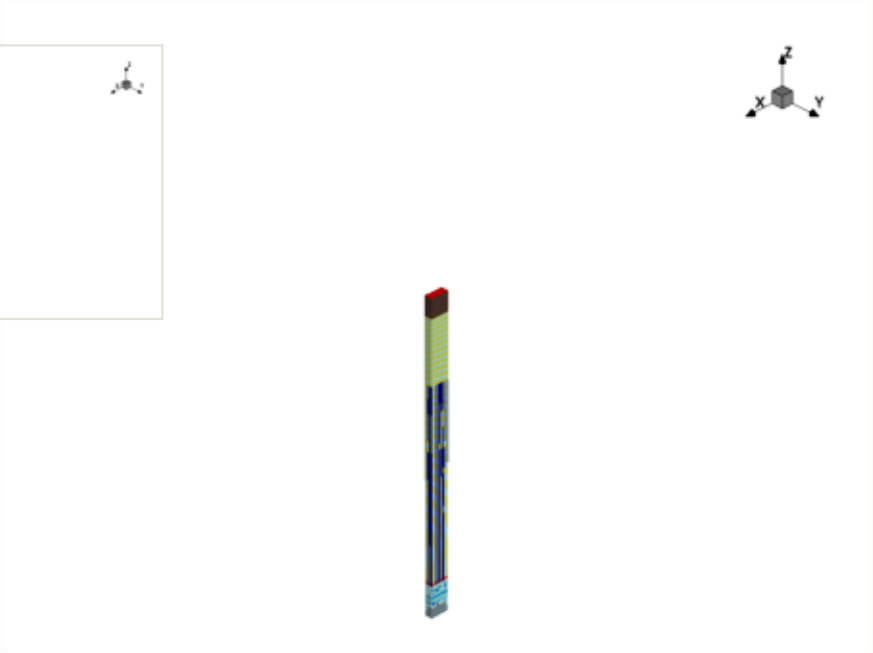

x cut at 0.000 µm

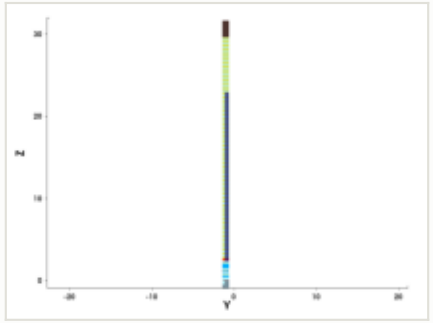

y cut at -1.035 µm

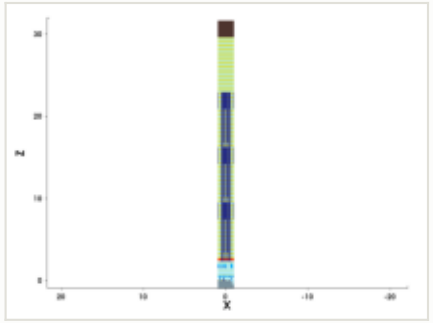

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

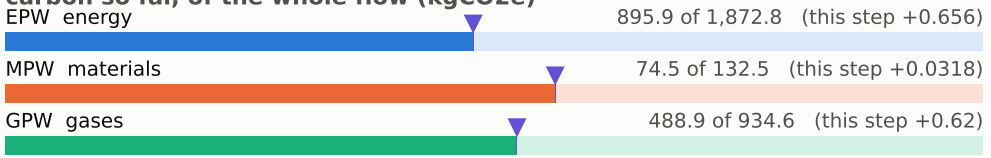

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

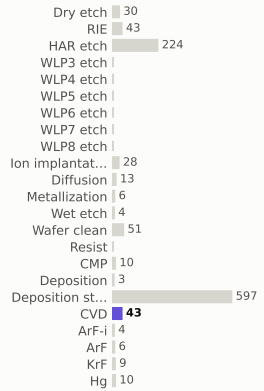

materials deposited (g)

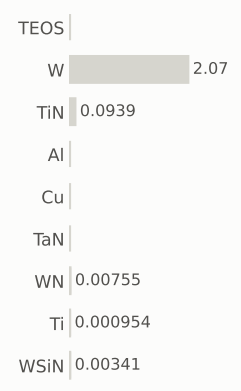

gases emitted (g)

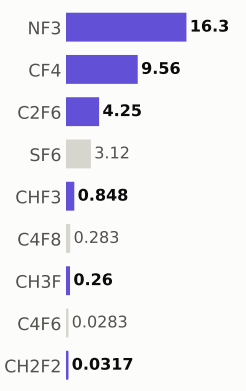

Step #14690: Wafer_clean

clean · Wafer_clean

0.169	1,459.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

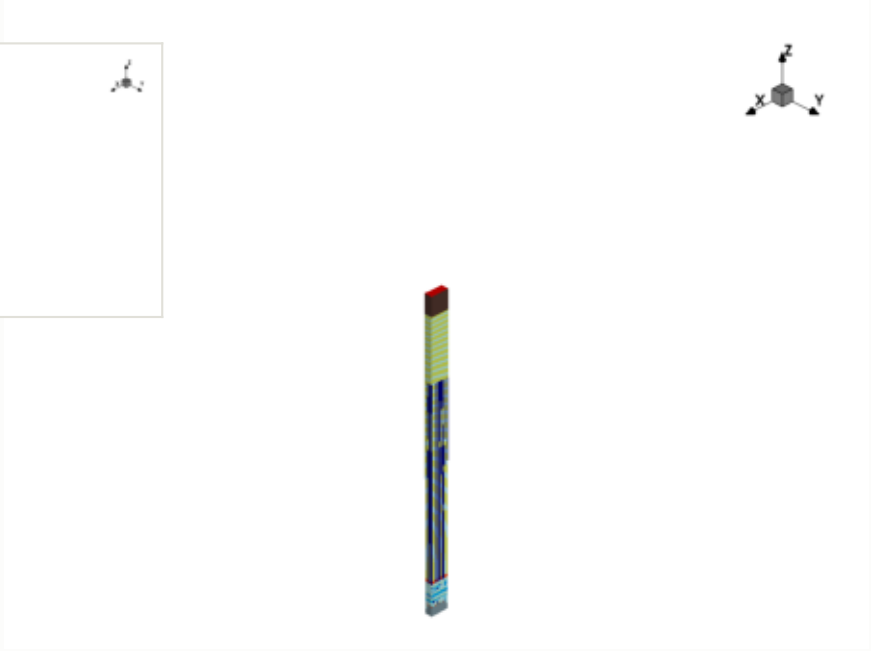

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

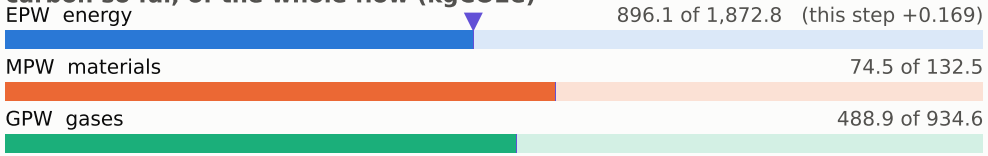

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

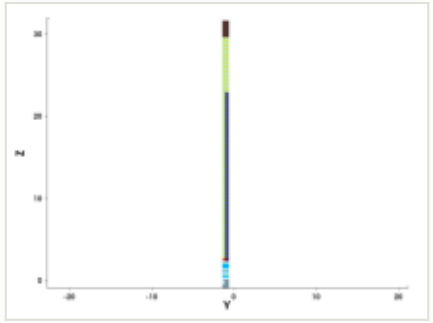

y cut at -1.035 µm

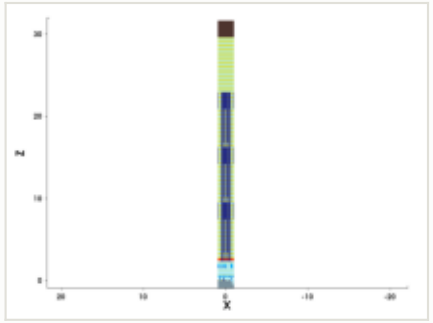

mask for this step

no mask for this step

steps by process area

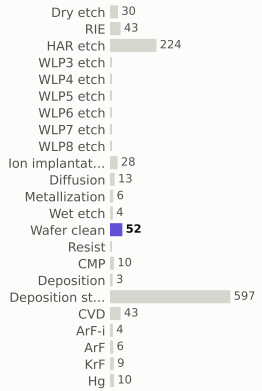

materials deposited (g)

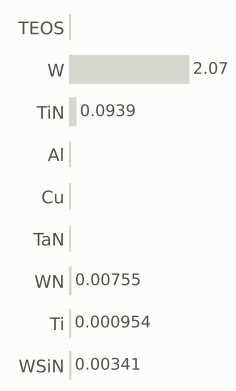

gases emitted (g)

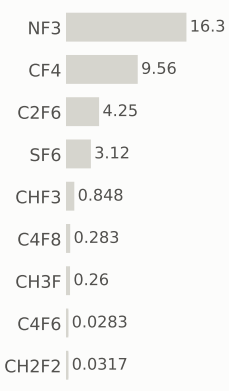

Step #14700: ArF-i

litho_patterning · ArF-i

0.217	1,459.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

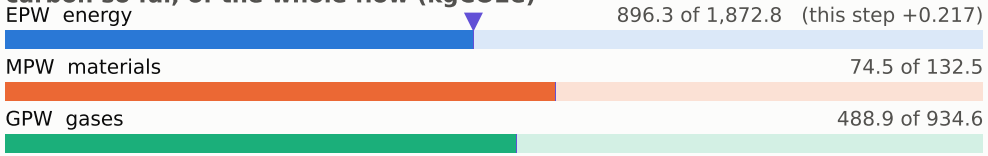

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

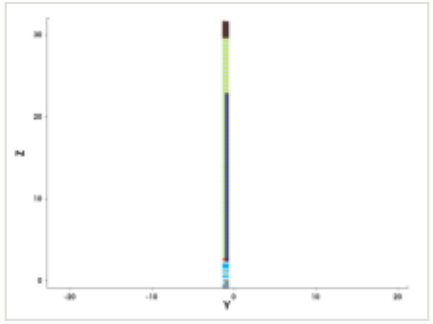

y cut at -1.035 µm

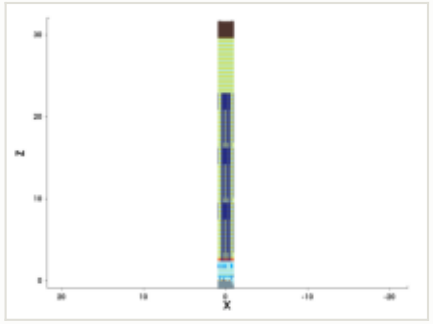

mask: layer 27:0 (OASIS)

steps by process area

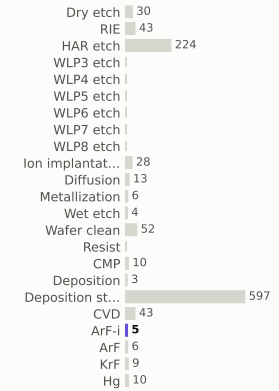

materials deposited (g)

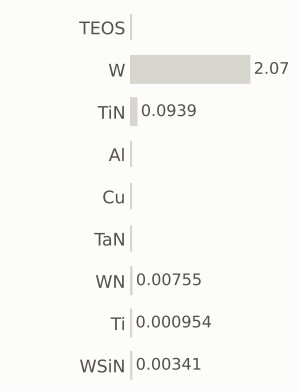

gases emitted (g)

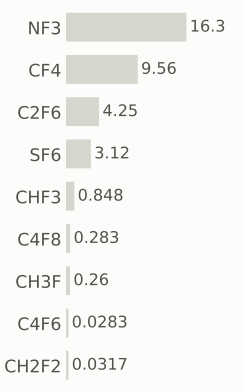

Step #14710: RIE

etch_anisotropic · RIE

1.04	1,460.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

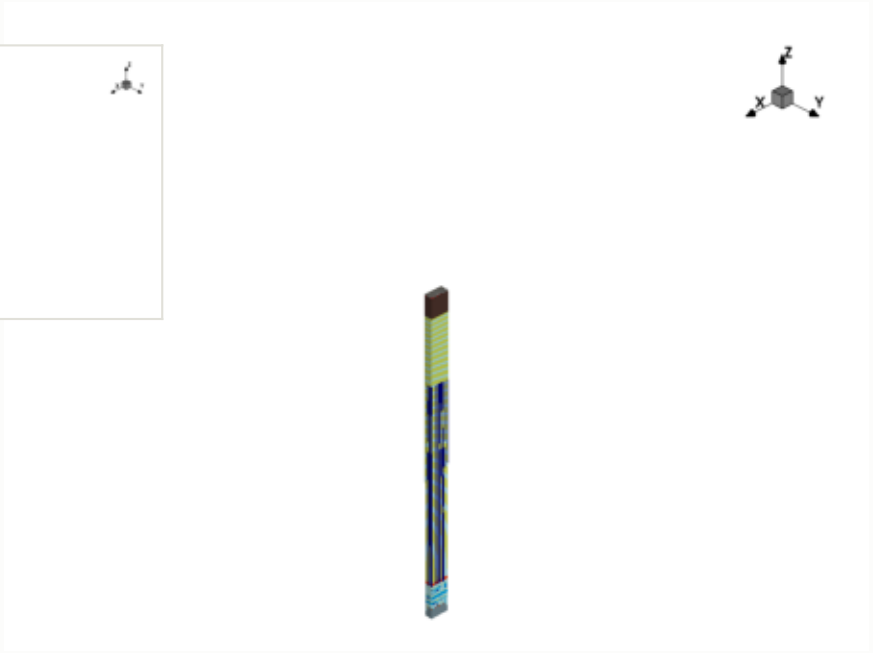

x cut at 0.000 µm

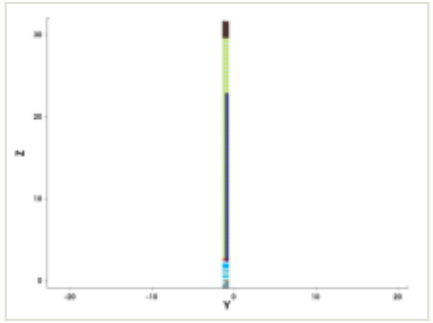

y cut at -1.035 µm

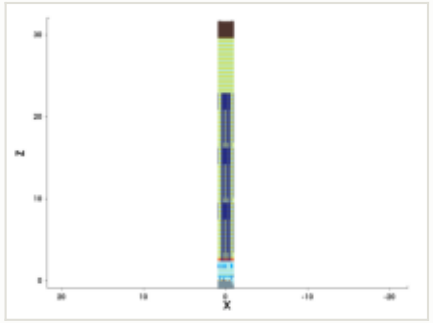

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

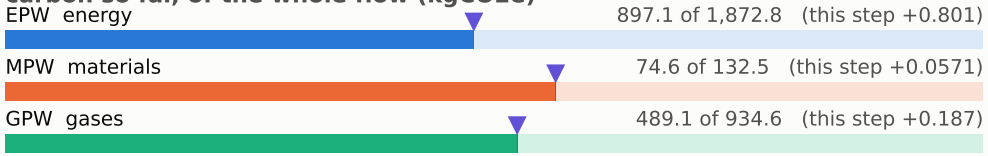

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

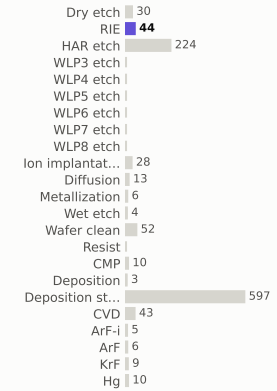

materials deposited (g)

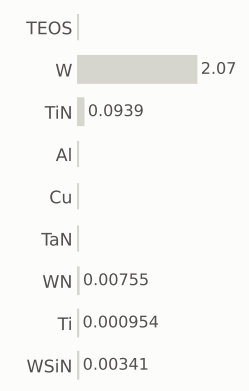

gases emitted (g)

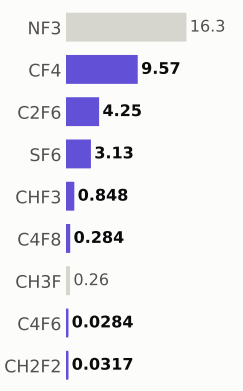

Step #14720: RIE

etch_anisotropic · RIE

1.04	1,461.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

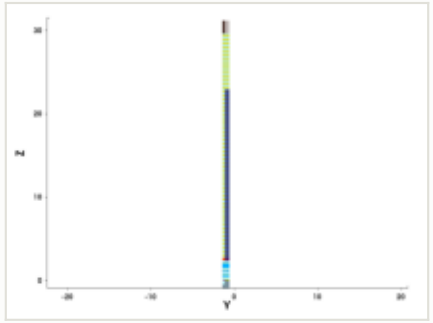

y cut at -1.035 µm

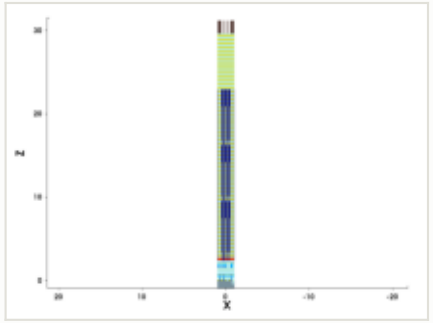

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

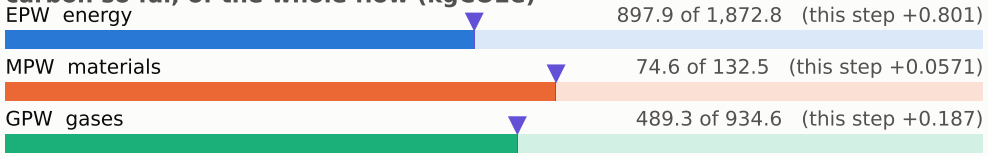

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

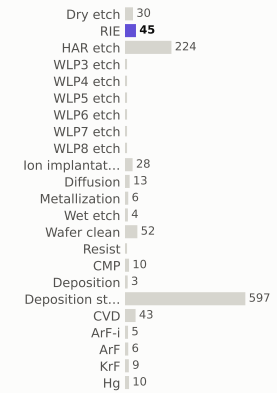

materials deposited (g)

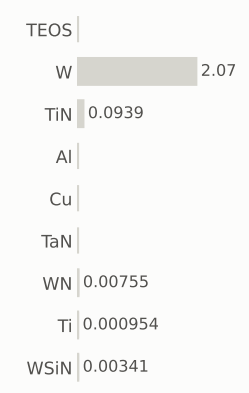

gases emitted (g)

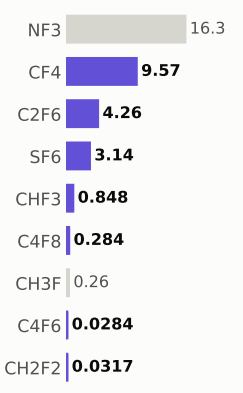

Step #14730: HAR_etch

etch_anisotropic · HAR_etch

1.04	1,462.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

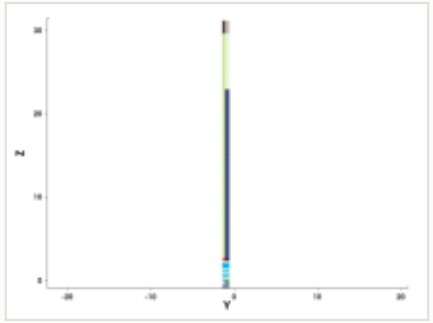

y cut at -1.035 µm

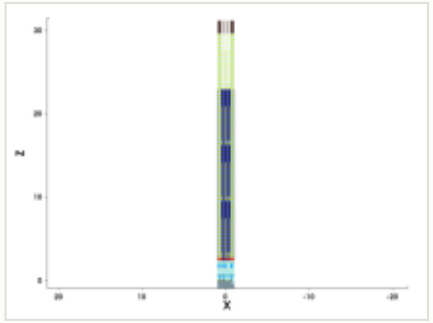

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

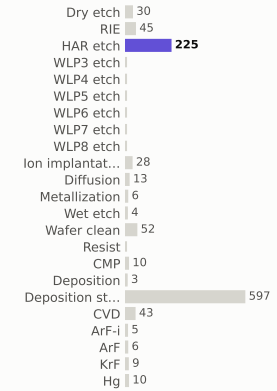

materials deposited (g)

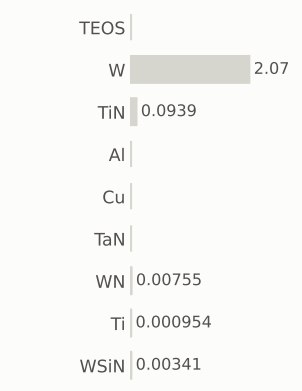

gases emitted (g)

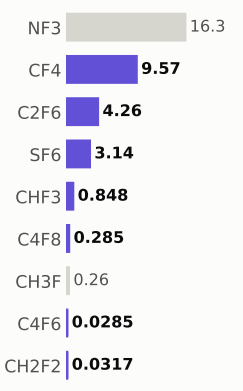

Step #14730.0671: HAR_etch

etch_noop · HAR_etch

1.04	1,463.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

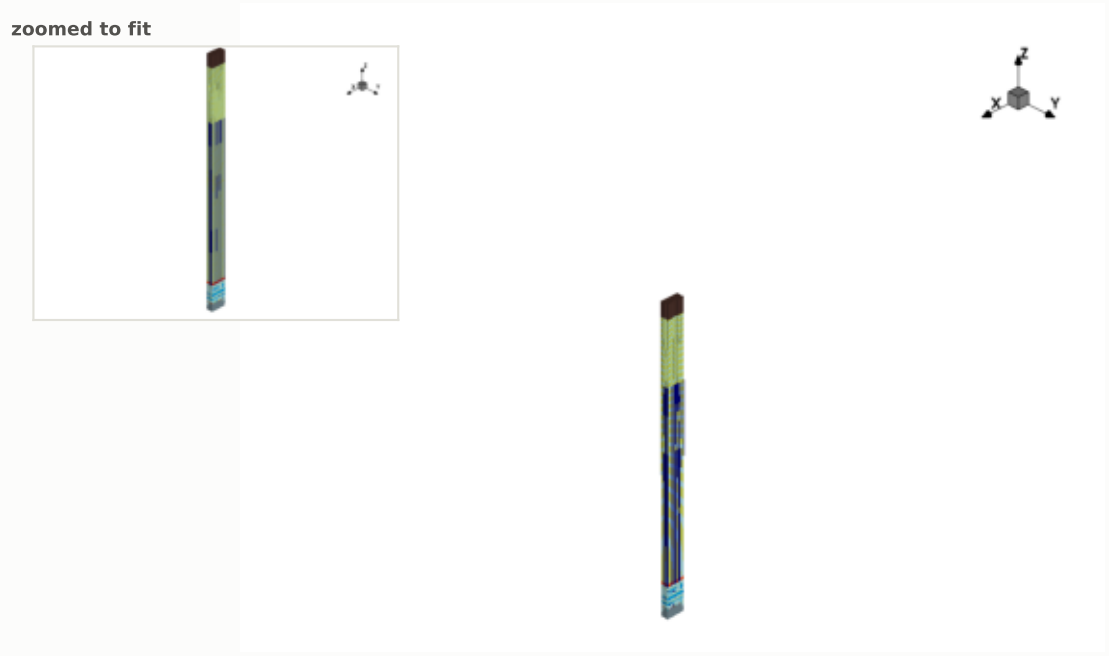

x cut at 0.000 µm

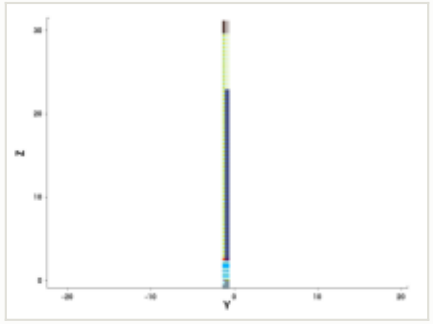

y cut at -1.035 µm

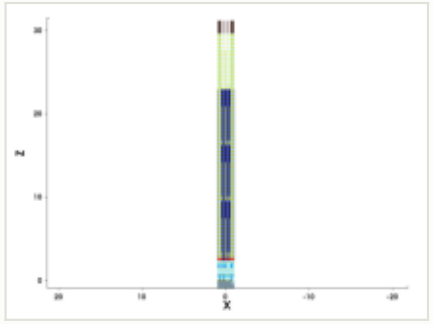

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

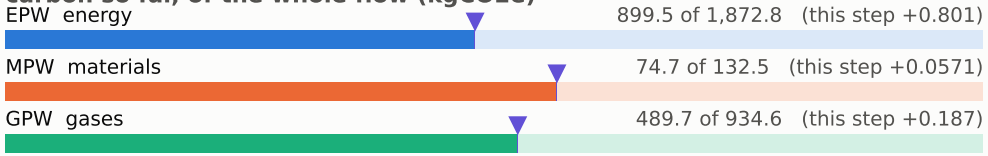

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

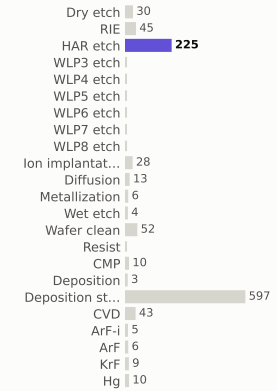

materials deposited (g)

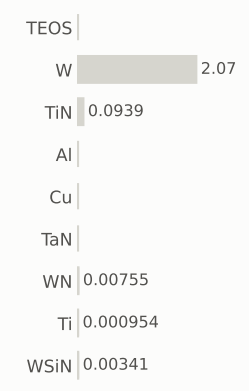

gases emitted (g)

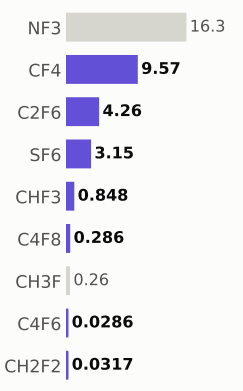

Step #14730.1342: HAR_etch

etch_noop · HAR_etch

1.04	1,465.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

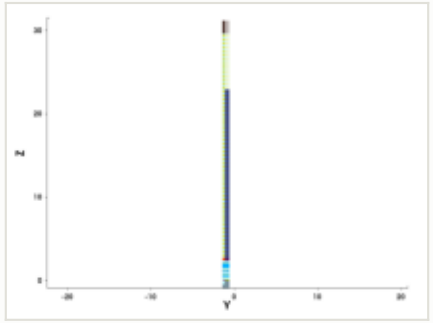

y cut at -1.035 µm

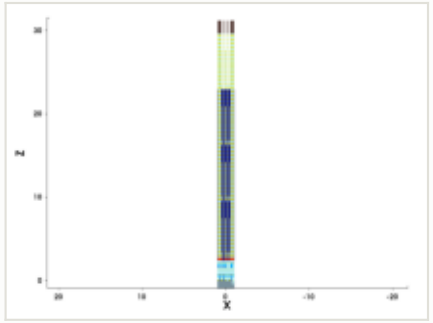

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

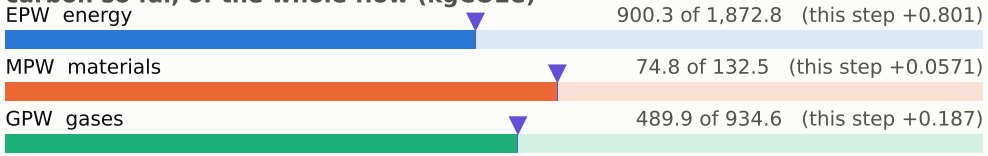

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

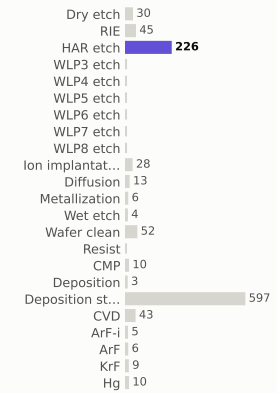

materials deposited (g)

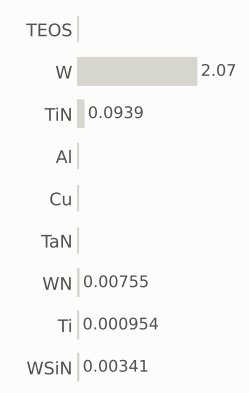

gases emitted (g)

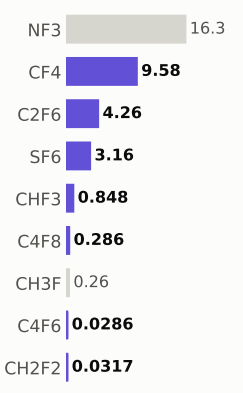

Step #14730.2013: HAR_etch

etch_noop · HAR_etch

1.04	1,466.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

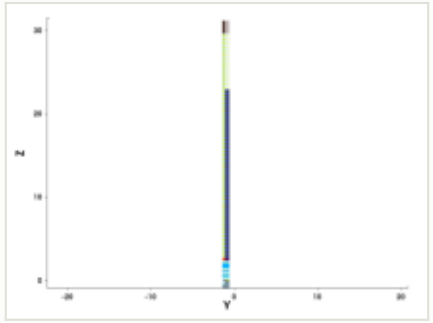

y cut at -1.035 µm

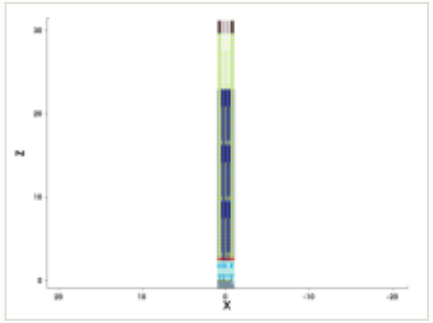

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

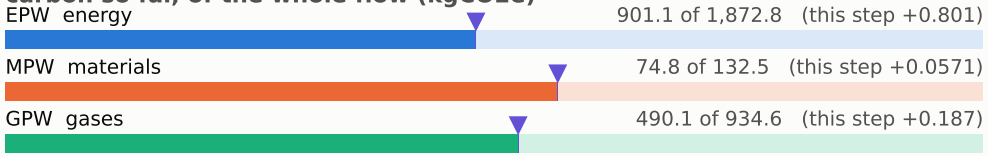

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

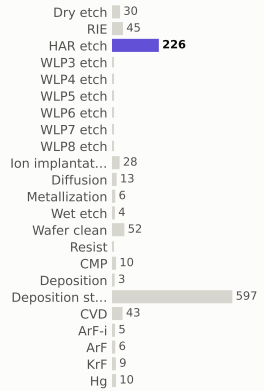

materials deposited (g)

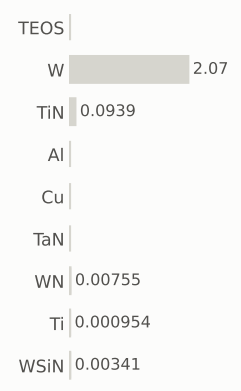

gases emitted (g)

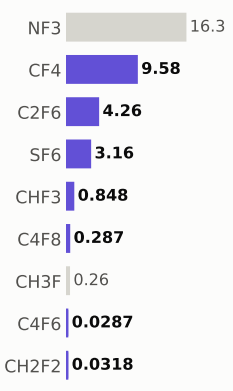

Step #14730.2685: HAR_etch

etch_noop · HAR_etch

1.04	1,467.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

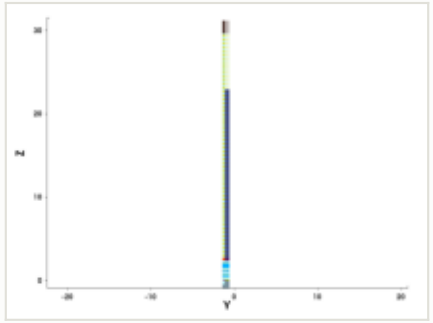

y cut at -1.035 µm

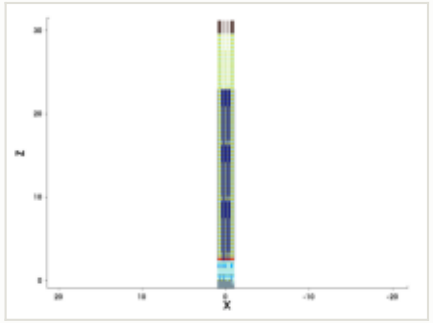

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

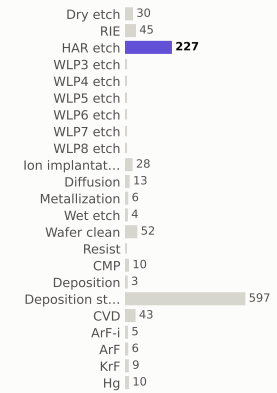

materials deposited (g)

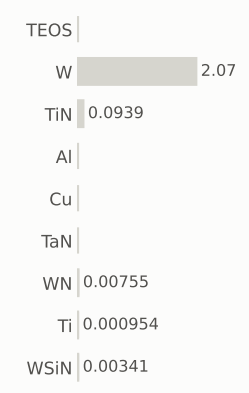

gases emitted (g)

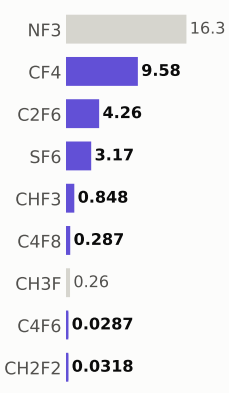

Step #14730.3356: HAR_etch

etch_noop · HAR_etch

1.04	1,468.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

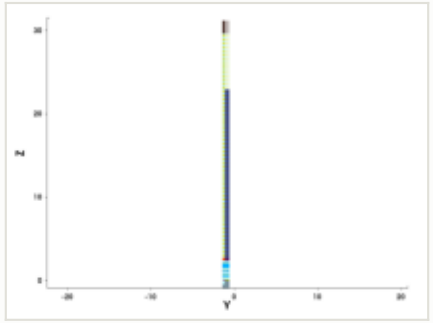

y cut at -1.035 µm

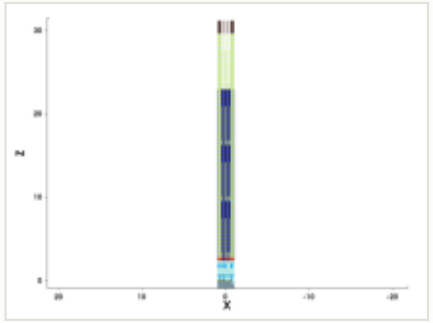

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

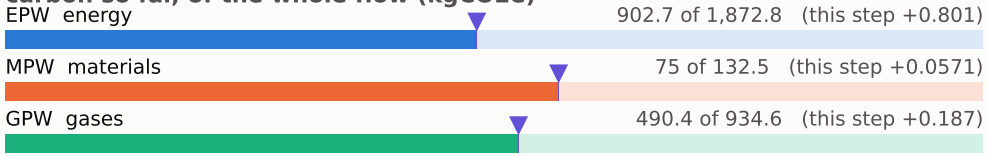

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

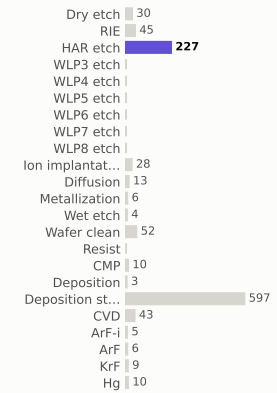

materials deposited (g)

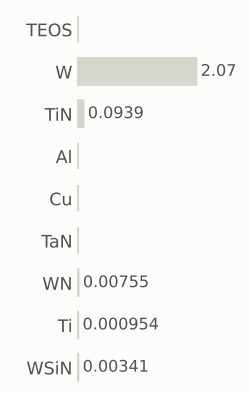

gases emitted (g)

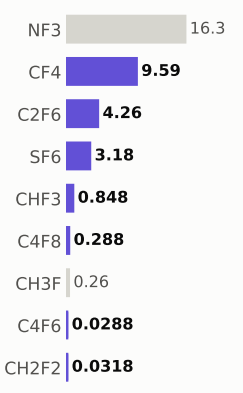

Step #14730.4027: HAR_etch

etch_noop · HAR_etch

1.04	1,469.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

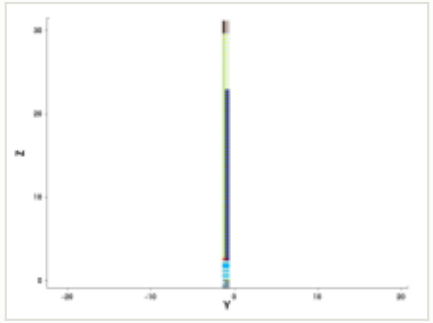

y cut at -1.035 µm

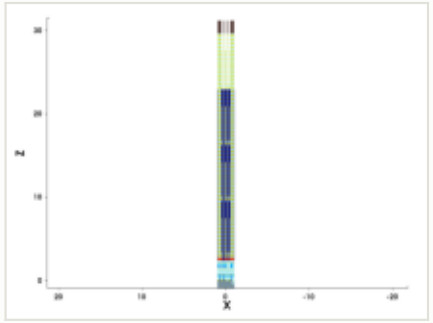

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

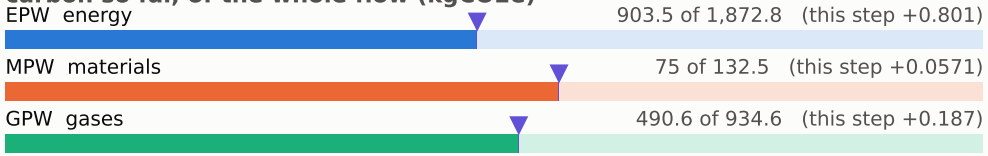

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

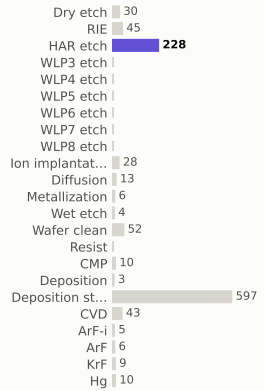

materials deposited (g)

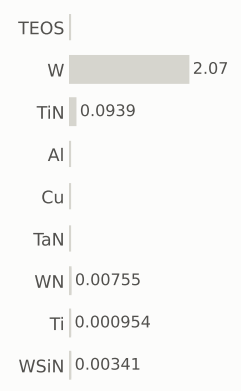

gases emitted (g)

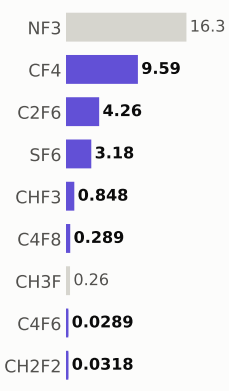

Step #14730.4698: HAR_etch

etch_noop · HAR_etch

1.04	1,470.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

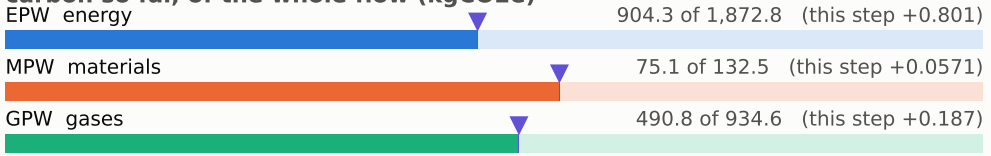

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

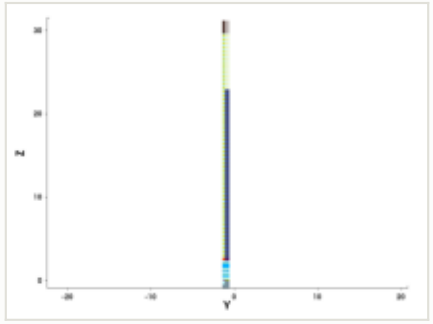

y cut at -1.035 µm

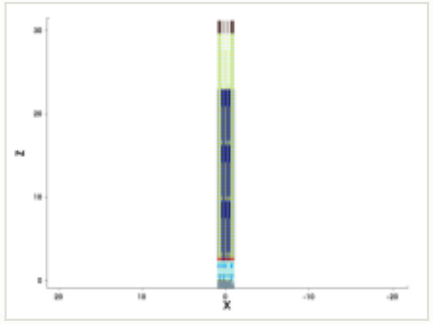

mask for this step

no mask for this step

steps by process area

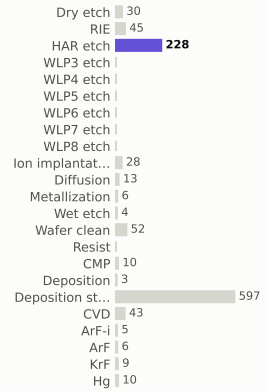

materials deposited (g)

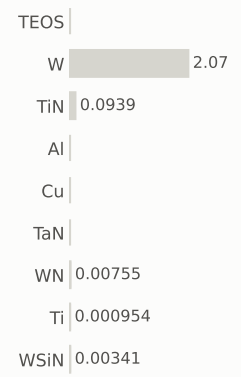

gases emitted (g)

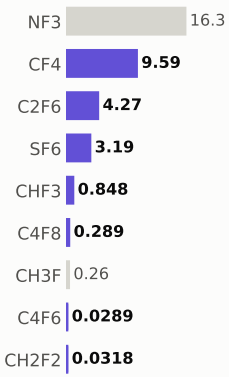

Step #14730.5369: HAR_etch

etch_noop · HAR_etch

1.04	1,471.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

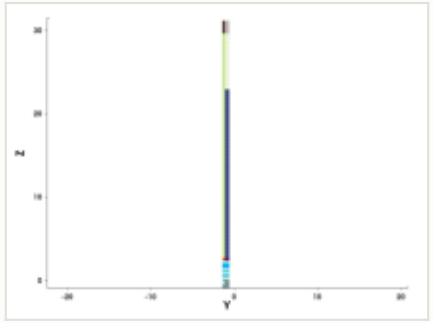

y cut at -1.035 µm

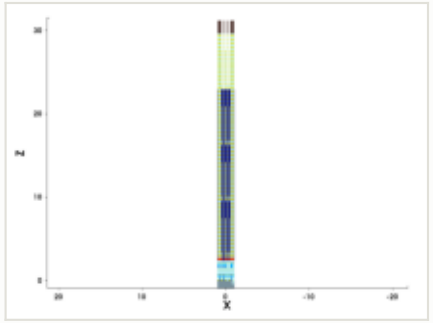

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

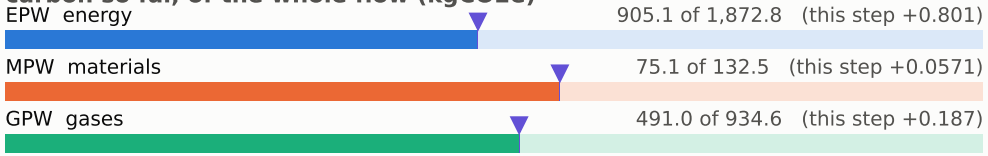

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

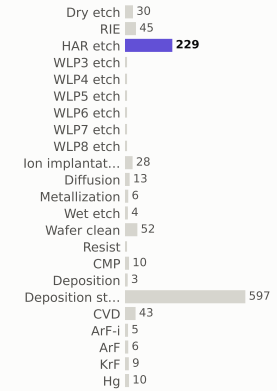

materials deposited (g)

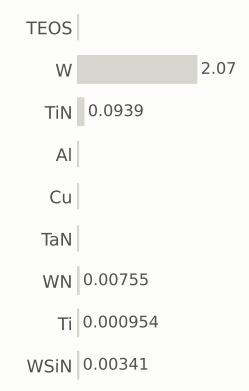

gases emitted (g)

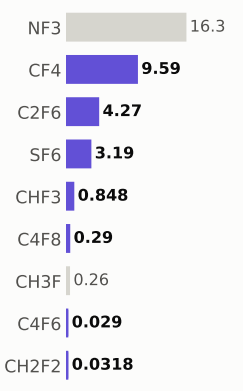

Step #14730.604: HAR_etch

etch_noop · HAR_etch

1.04	1,472.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

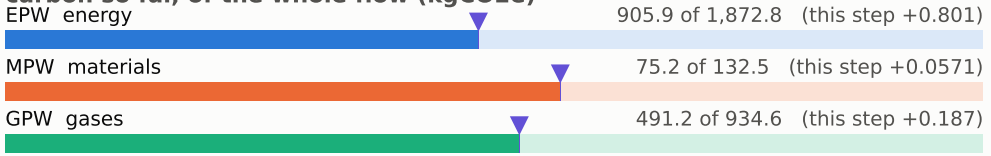

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

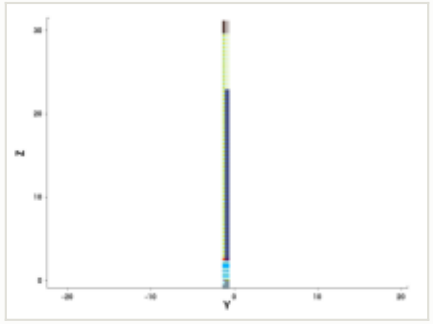

y cut at -1.035 µm

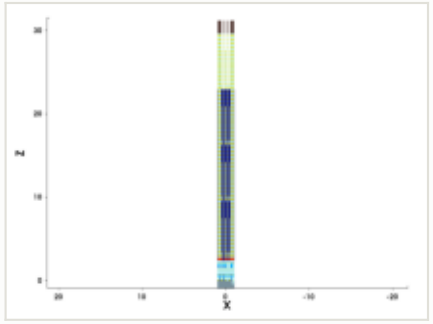

mask for this step

no mask for this step

steps by process area

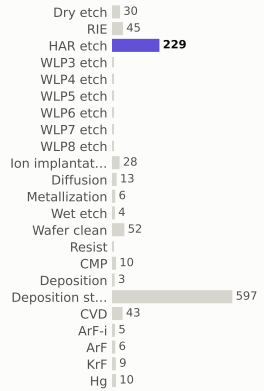

materials deposited (g)

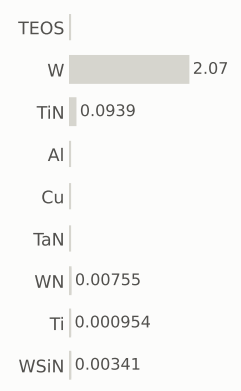

gases emitted (g)

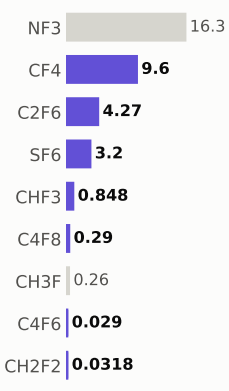

Step #14730.6711: HAR_etch

etch_noop · HAR_etch

1.04	1,473.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

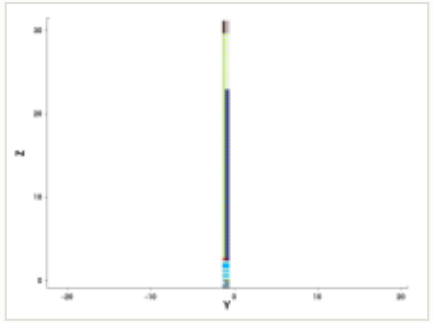

y cut at -1.035 µm

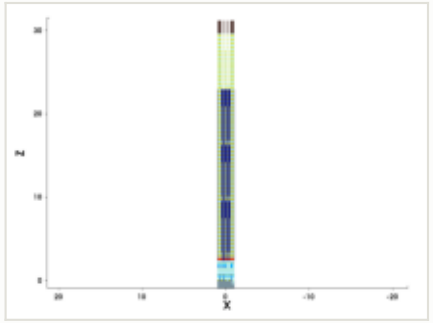

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

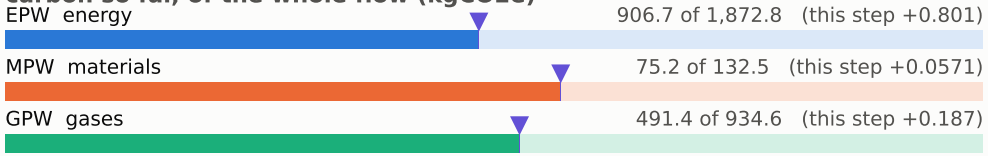

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

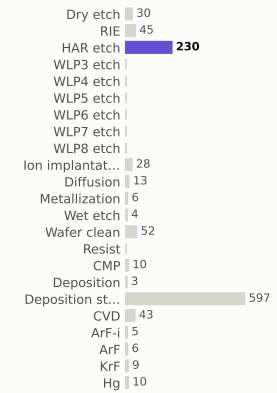

materials deposited (g)

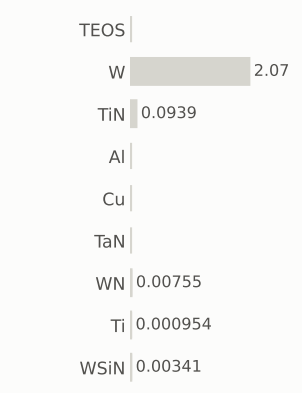

gases emitted (g)

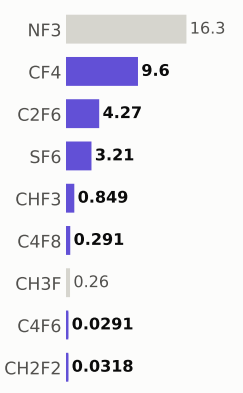

Step #14730.7383: HAR_etch

etch_noop · HAR_etch

1.04	1,474.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

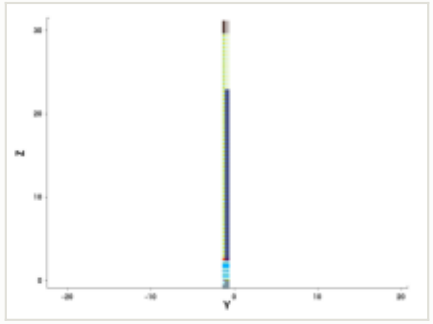

y cut at -1.035 µm

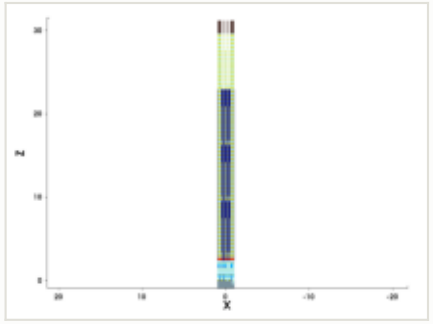

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

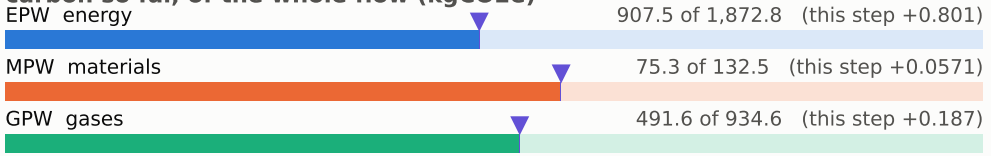

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

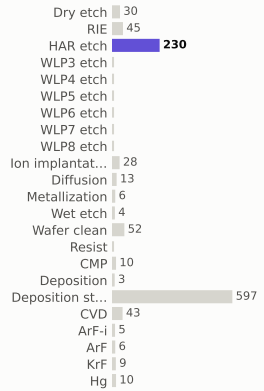

materials deposited (g)

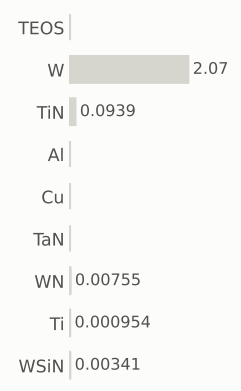

gases emitted (g)

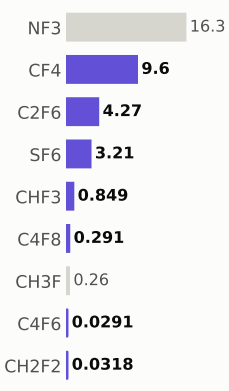

Step #14730.8054: HAR_etch

etch_noop · HAR_etch

1.04	1,475.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

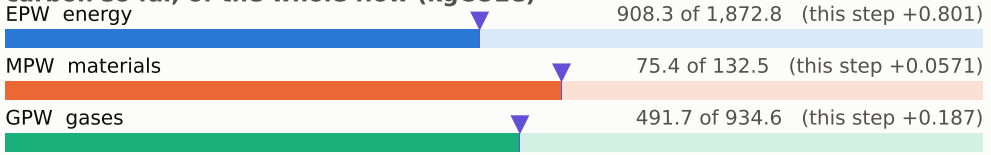

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

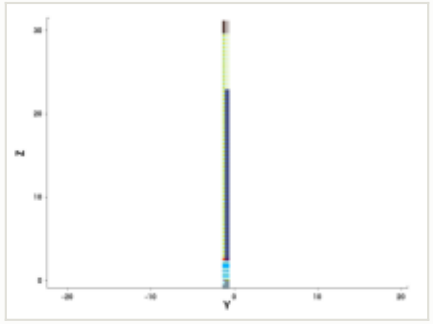

y cut at -1.035 µm

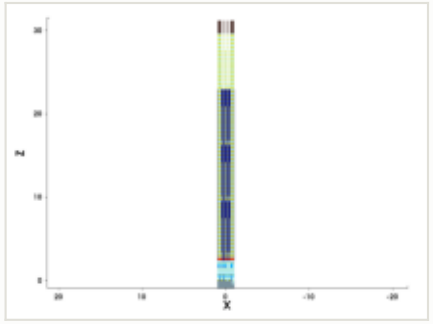

mask for this step

no mask for this step

steps by process area

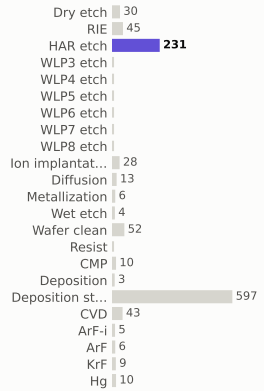

materials deposited (g)

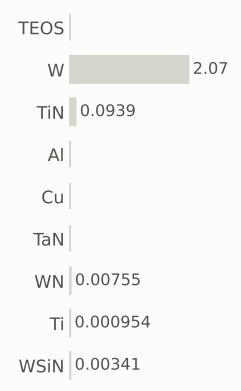

gases emitted (g)

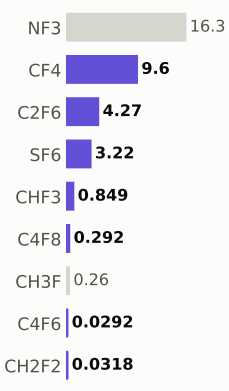

Step #14730.8725: HAR_etch

etch_noop · HAR_etch

1.04	1,476.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

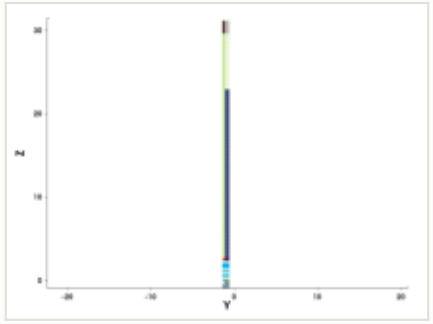

y cut at -1.035 µm

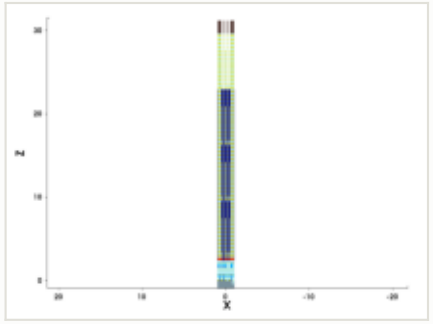

mask for this step

no mask for this step

steps by process area

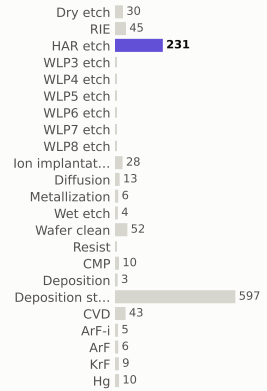

materials deposited (g)

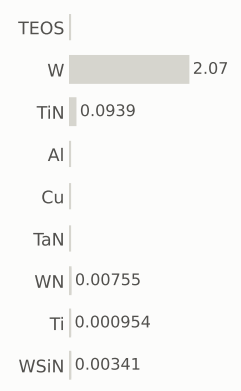

gases emitted (g)

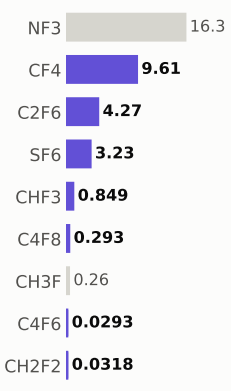

Step #14730.9396: HAR_etch

etch_noop · HAR_etch

1.04	1,477.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

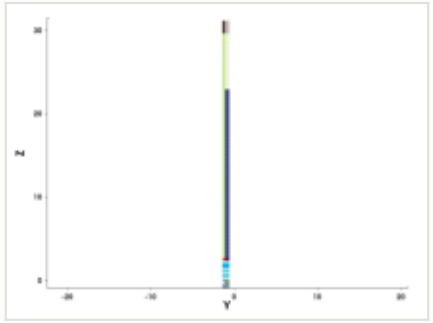

y cut at -1.035 µm

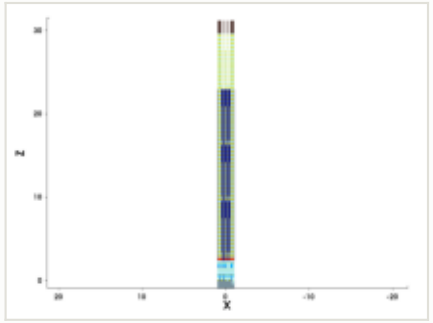

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

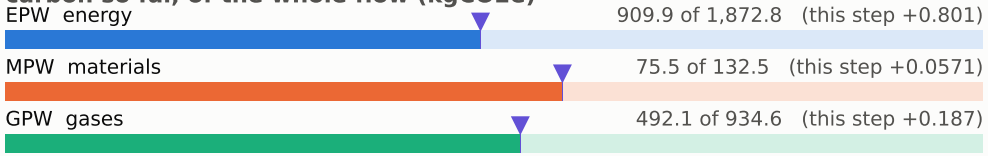

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

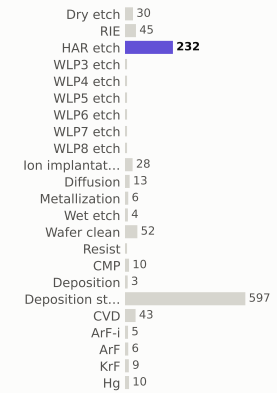

materials deposited (g)

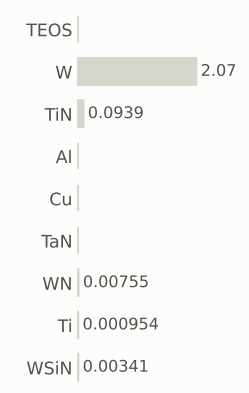

gases emitted (g)

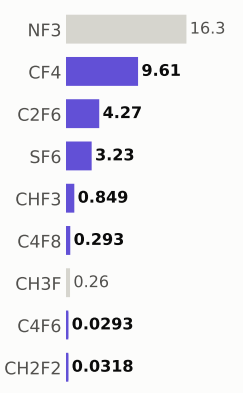

Step #14731.0067: HAR_etch

etch_noop · HAR_etch

1.04	1,478.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

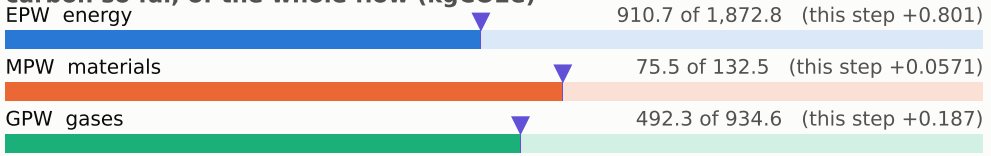

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

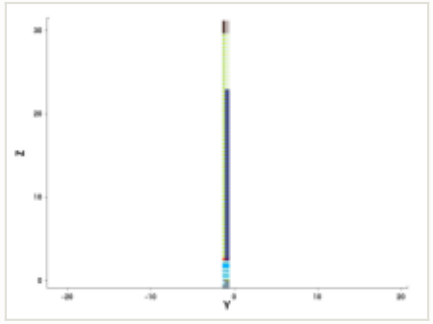

y cut at -1.035 µm

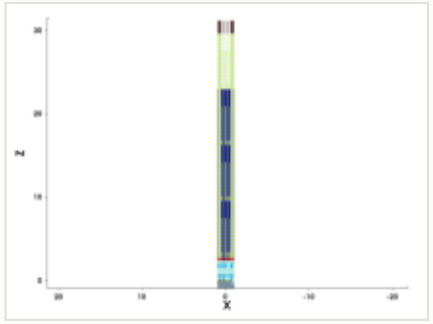

mask for this step

no mask for this step

steps by process area

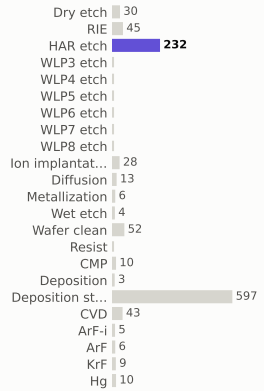

materials deposited (g)

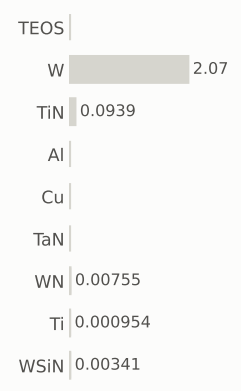

gases emitted (g)

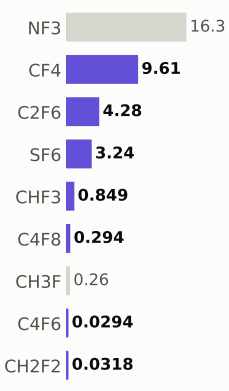

Step #14731.0738: HAR_etch

etch_noop · HAR_etch

1.04	1,479.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

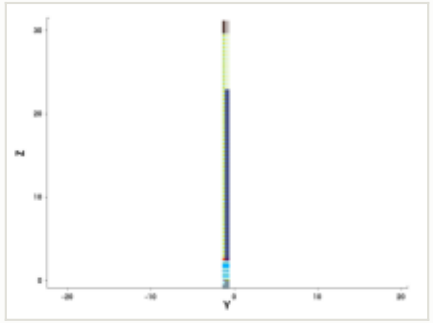

y cut at -1.035 µm

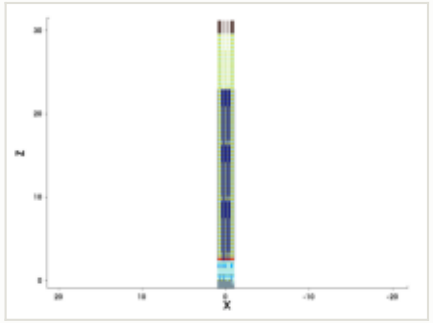

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

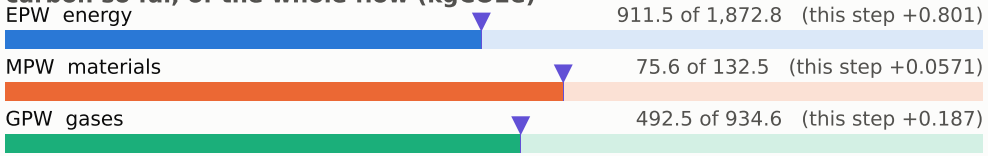

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

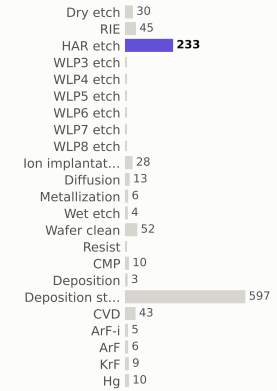

materials deposited (g)

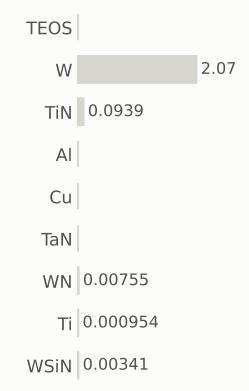

gases emitted (g)

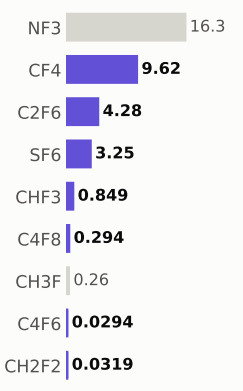

Step #14731.1409: HAR_etch

etch_noop · HAR_etch

1.04	1,480.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

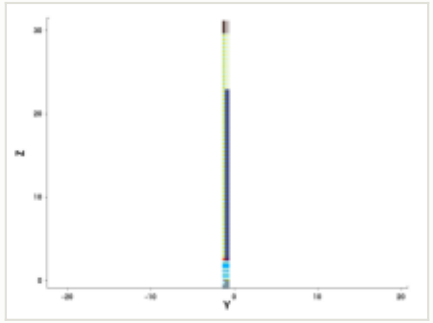

y cut at -1.035 µm

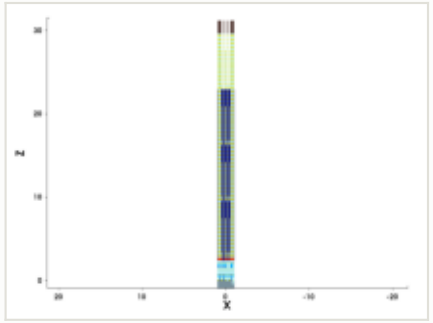

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

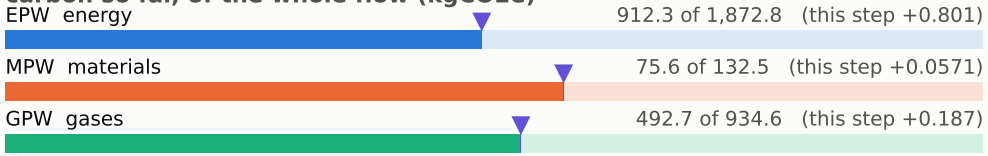

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

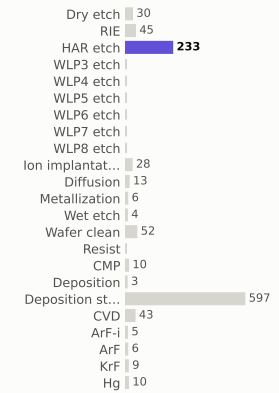

materials deposited (g)

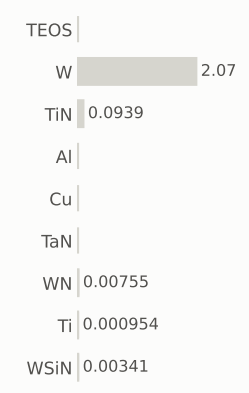

gases emitted (g)

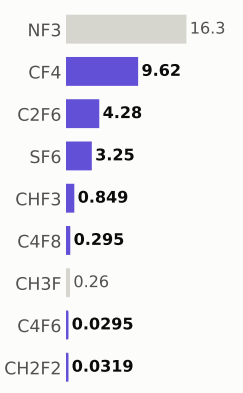

Step #14731.2081: HAR_etch

etch_noop · HAR_etch

1.04	1,481.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

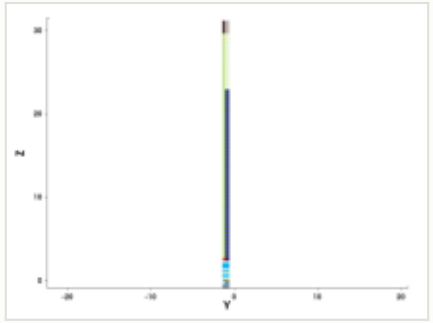

y cut at -1.035 µm

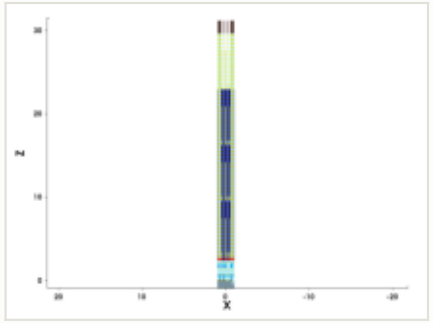

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

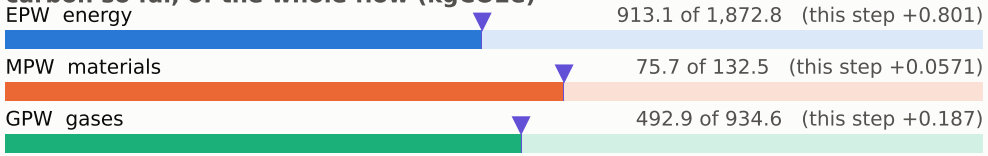

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

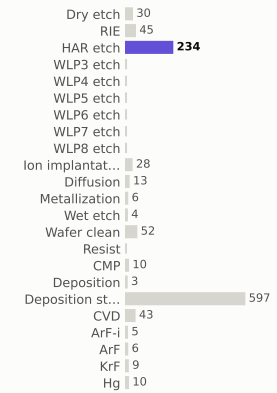

materials deposited (g)

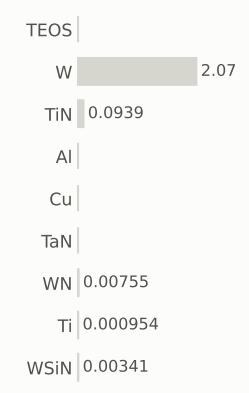

gases emitted (g)

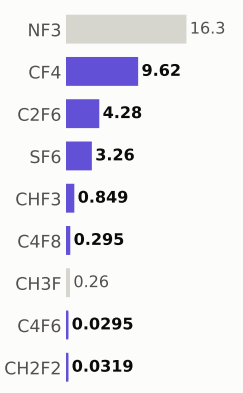

Step #14731.2752: HAR_etch

etch_noop · HAR_etch

1.04	1,482.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

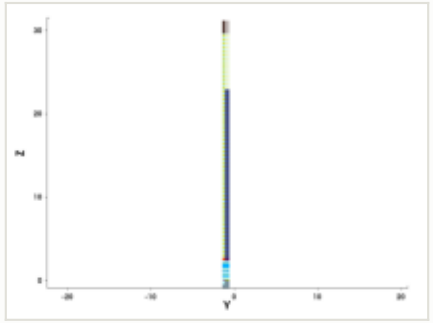

y cut at -1.035 µm

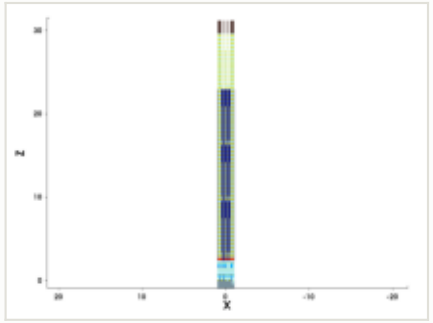

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

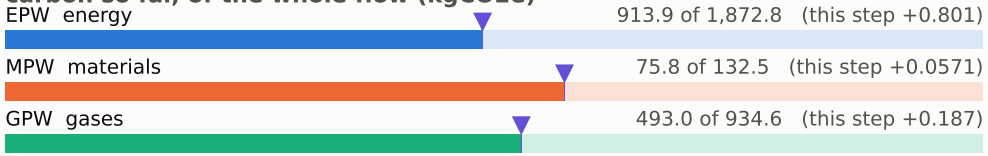

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

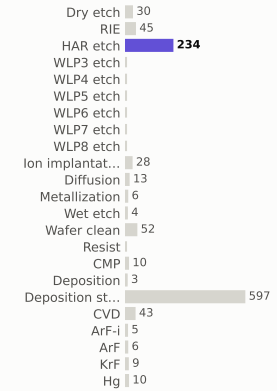

materials deposited (g)

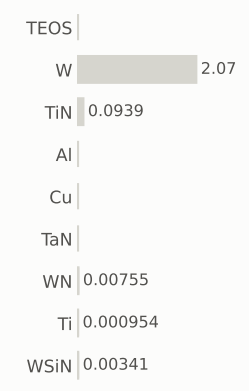

gases emitted (g)

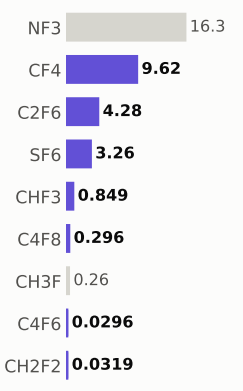

Step #14731.3423: HAR_etch

etch_noop · HAR_etch

1.04	1,483.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

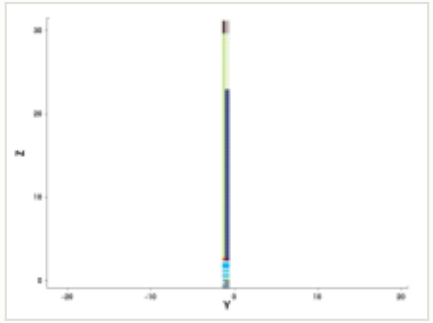

y cut at -1.035 µm

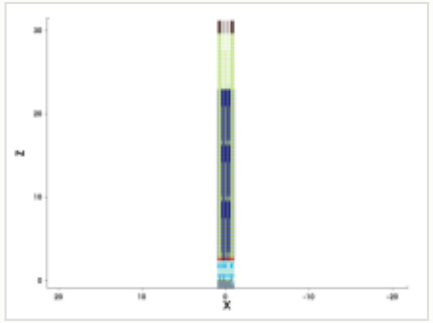

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

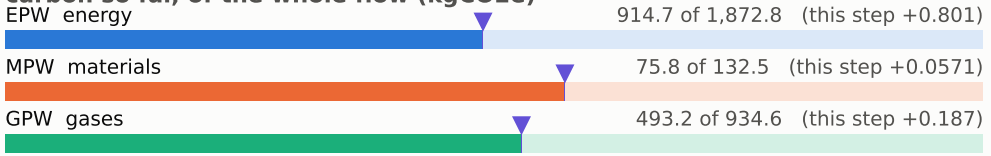

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

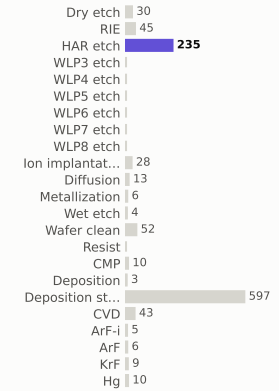

materials deposited (g)

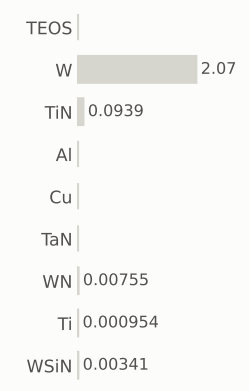

gases emitted (g)

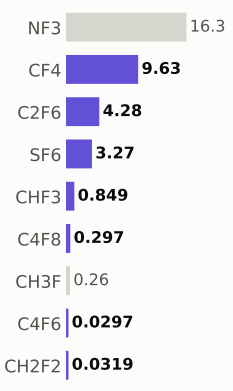

Step #14731.4094: HAR_etch

etch_noop · HAR_etch

1.04	1,484.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

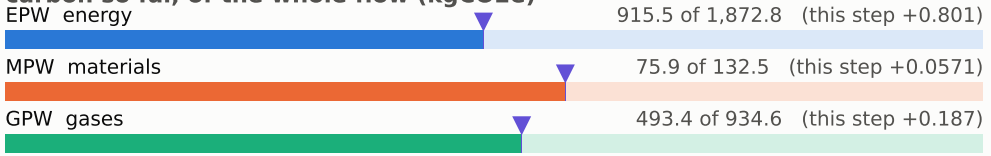

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

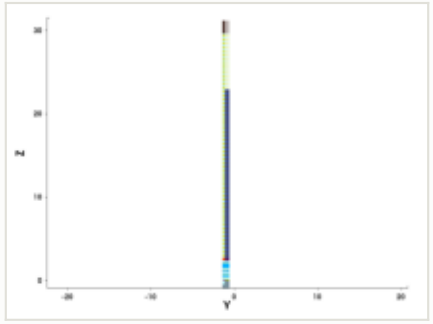

y cut at -1.035 µm

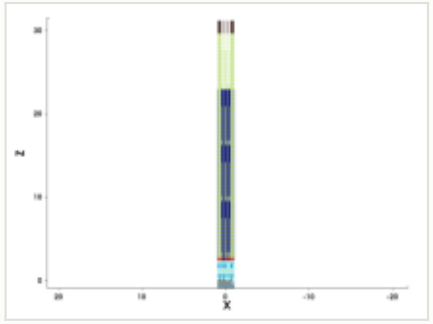

mask for this step

no mask for this step

steps by process area

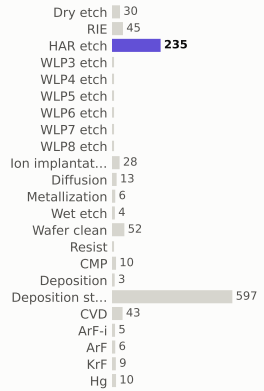

materials deposited (g)

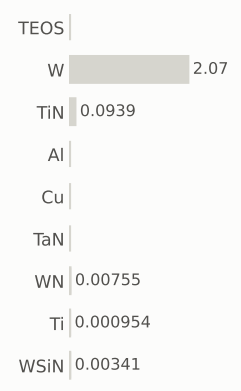

gases emitted (g)

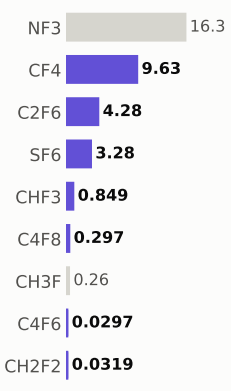

Step #14731.4765: HAR_etch

etch_noop · HAR_etch

1.04	1,485.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

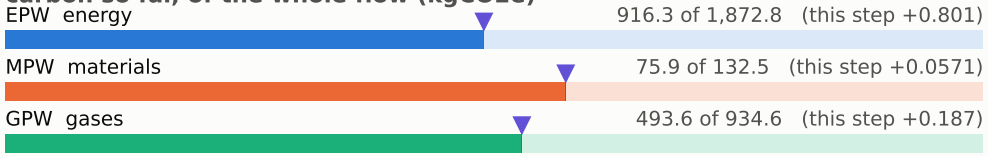

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

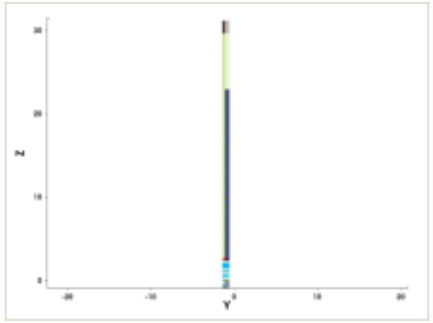

y cut at -1.035 µm

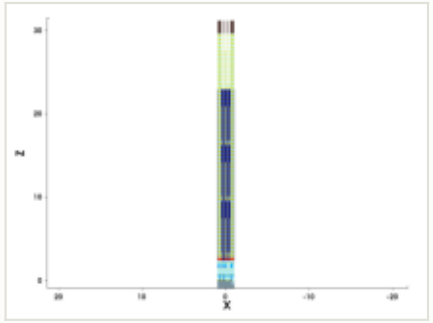

mask for this step

no mask for this step

steps by process area

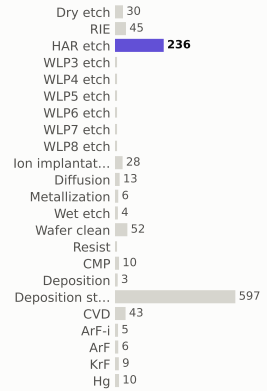

materials deposited (g)

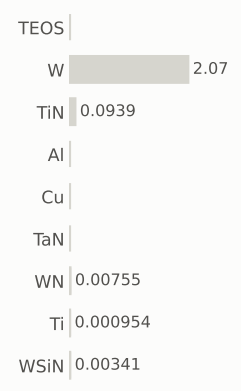

gases emitted (g)

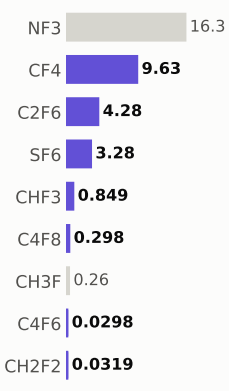

Step #14731.5436: HAR_etch

etch_noop · HAR_etch

1.04	1,486.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

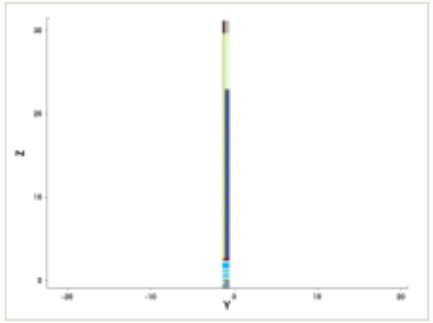

y cut at -1.035 µm

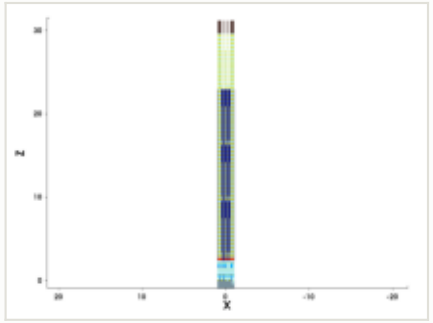

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

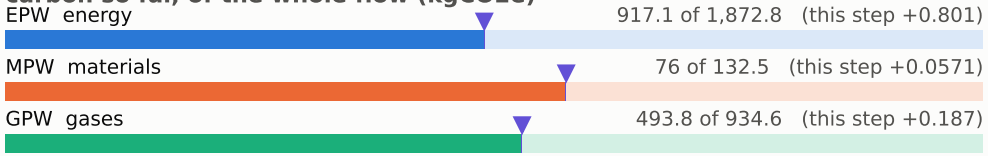

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

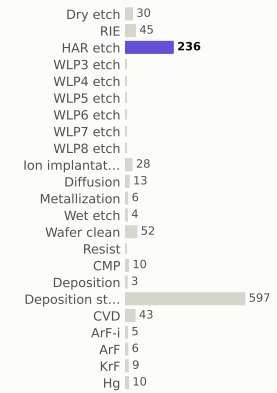

materials deposited (g)

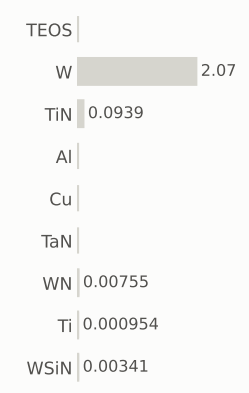

gases emitted (g)

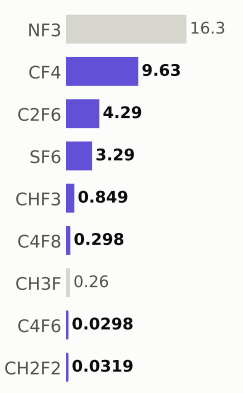

Step #14731.6107: HAR_etch

etch_noop · HAR_etch

1.04	1,487.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

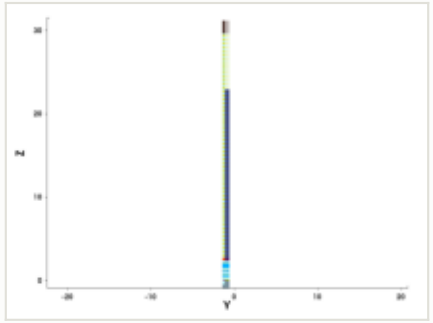

y cut at -1.035 µm

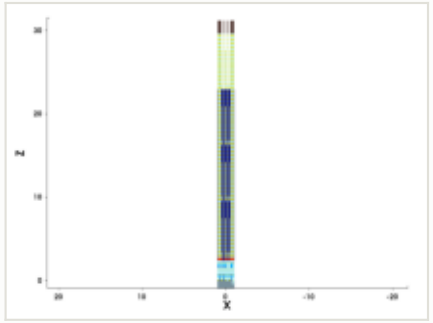

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

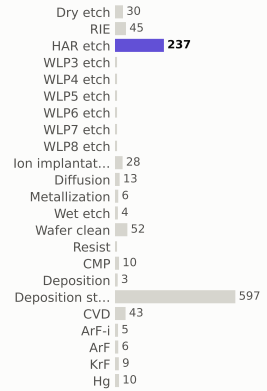

materials deposited (g)

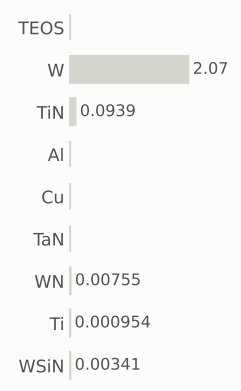

gases emitted (g)

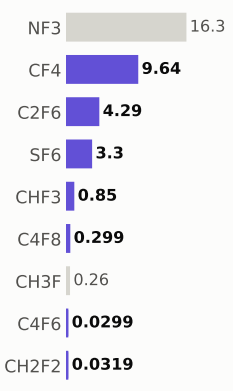

Step #14731.6779: HAR_etch

etch_noop · HAR_etch

1.04	1,489.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

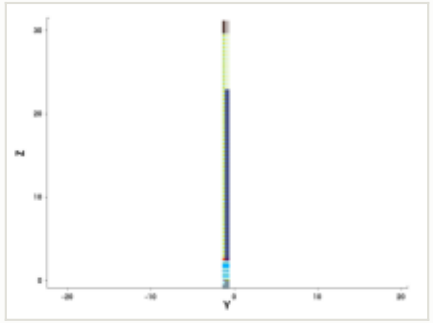

y cut at -1.035 µm

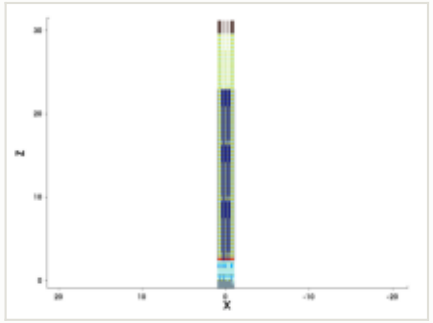

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

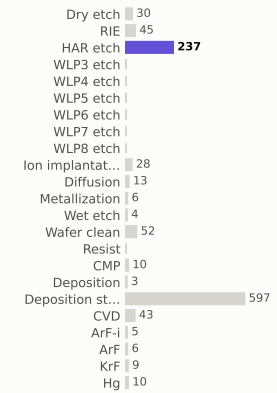

materials deposited (g)

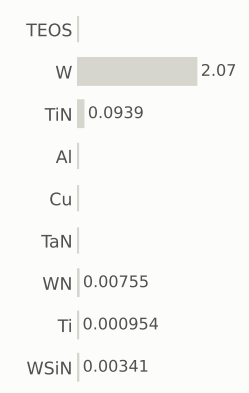

gases emitted (g)

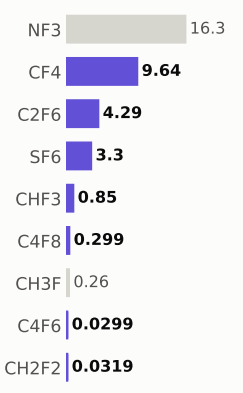

Step #14731.745: HAR_etch

etch_noop · HAR_etch

1.04	1,490.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

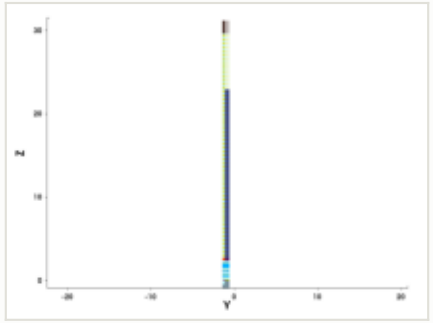

y cut at -1.035 µm

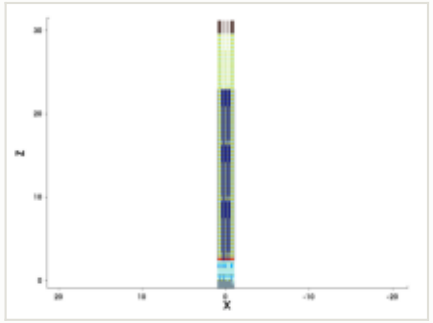

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

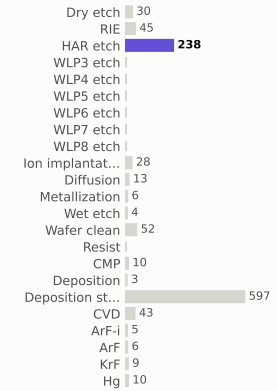

materials deposited (g)

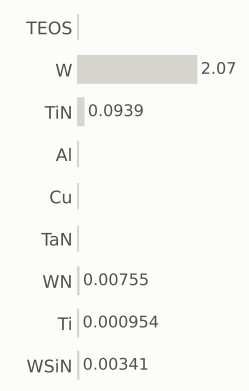

gases emitted (g)

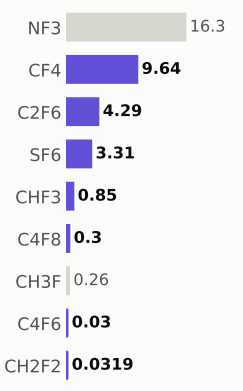

Step #14731.8121: HAR_etch

etch_noop · HAR_etch

1.04	1,491.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

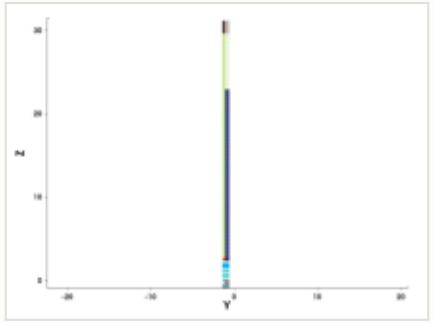

y cut at -1.035 µm

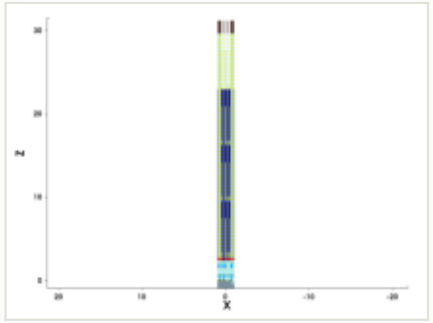

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

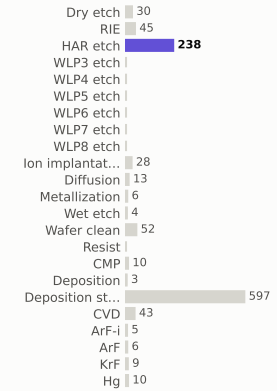

materials deposited (g)

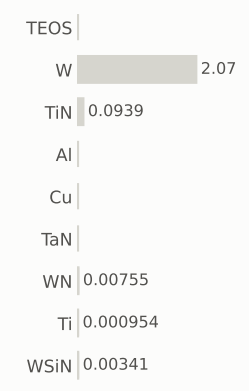

gases emitted (g)

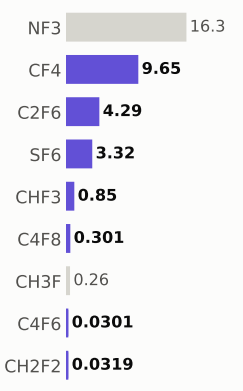

Step #14731.8792: HAR_etch

etch_noop · HAR_etch

1.04	1,492.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

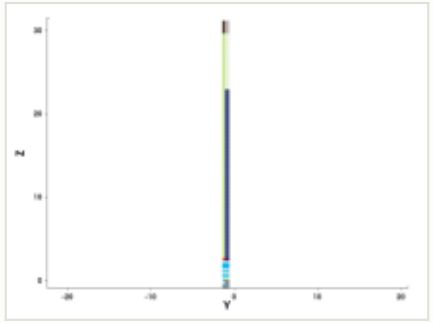

y cut at -1.035 µm

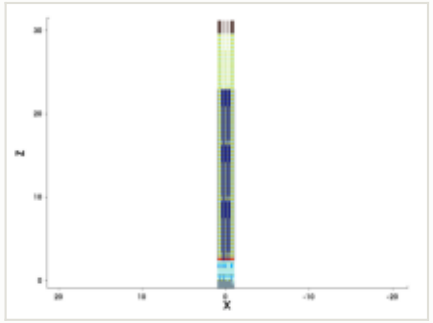

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

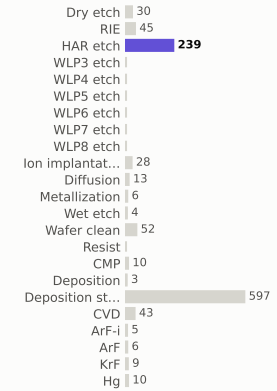

materials deposited (g)

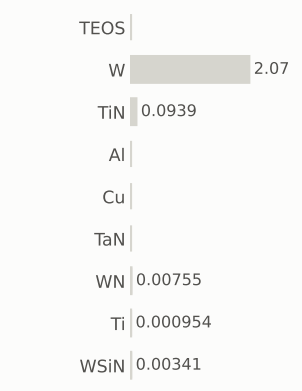

gases emitted (g)

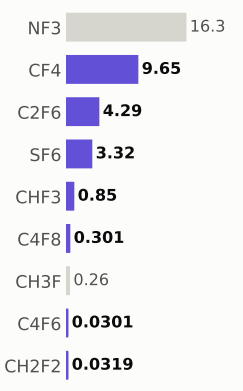

Step #14731.9463: HAR_etch

etch_noop · HAR_etch

1.04	1,493.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

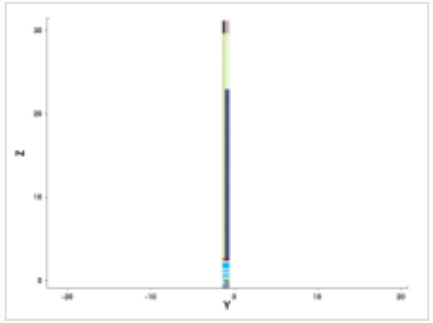

y cut at -1.035 µm

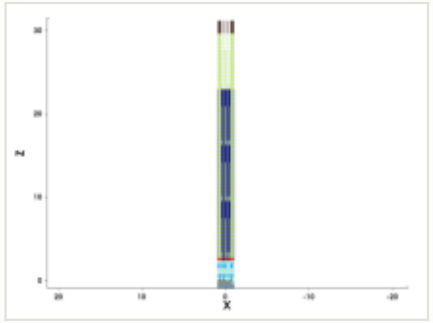

mask for this step

no mask for this step

steps by process area

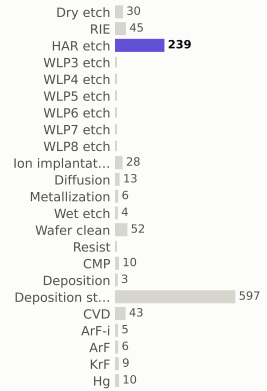

materials deposited (g)

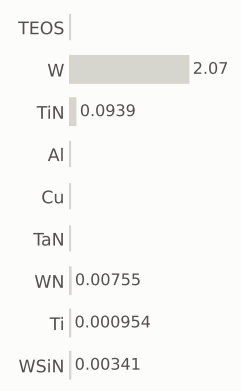

gases emitted (g)

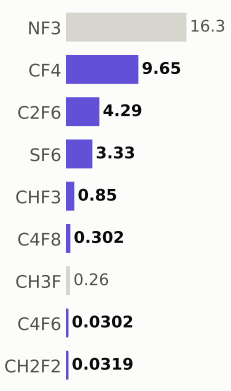

Step #14732.0134: HAR_etch

etch_noop · HAR_etch

1.04	1,494.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

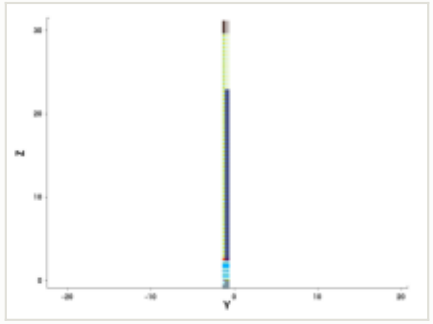

y cut at -1.035 µm

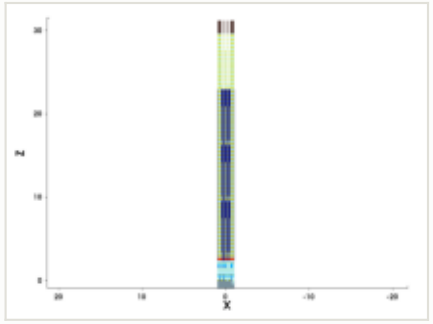

mask for this step

no mask for this step

steps by process area

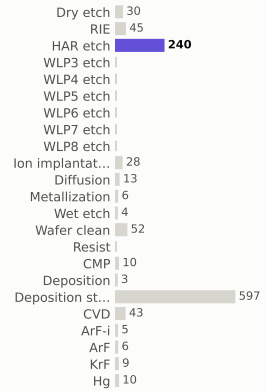

materials deposited (g)

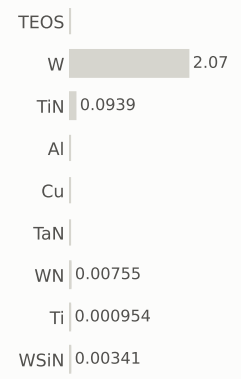

gases emitted (g)

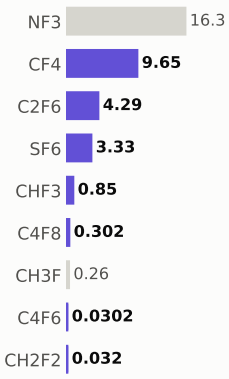

Step #14732.0805: HAR_etch

etch_noop · HAR_etch

1.04	1,495.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

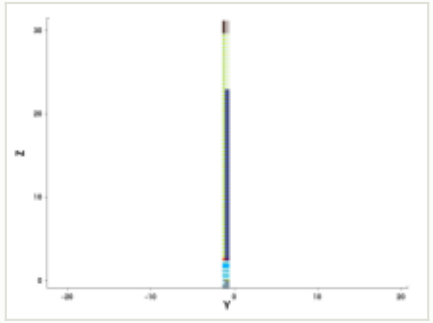

y cut at -1.035 µm

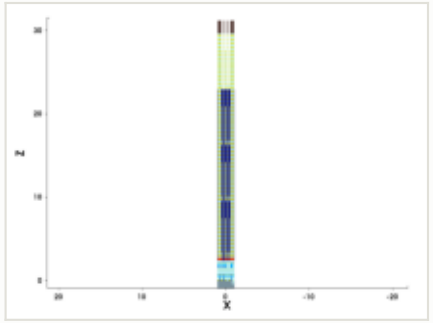

mask for this step

no mask for this step

steps by process area

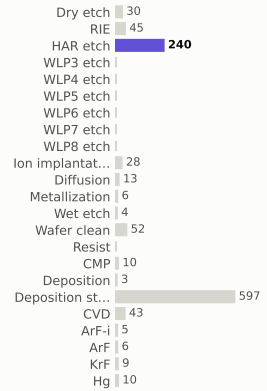

materials deposited (g)

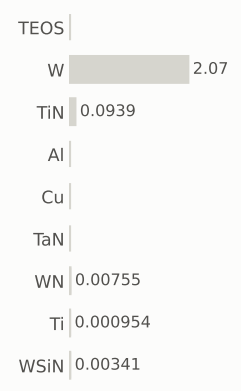

gases emitted (g)

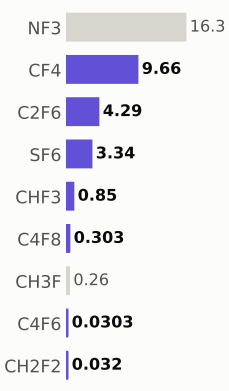

Step #14732.1477: HAR_etch

etch_noop · HAR_etch

1.04	1,496.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

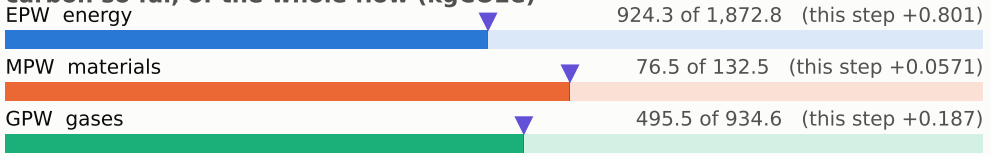

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

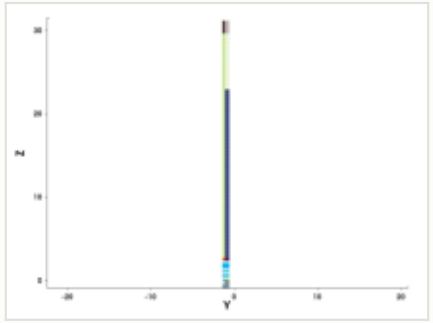

y cut at -1.035 µm

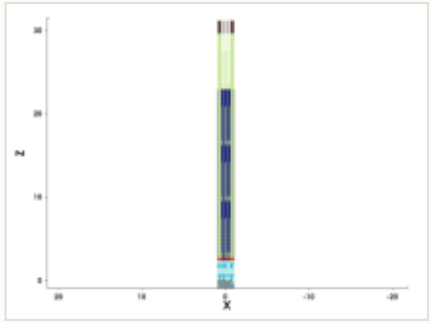

mask for this step

no mask for this step

steps by process area

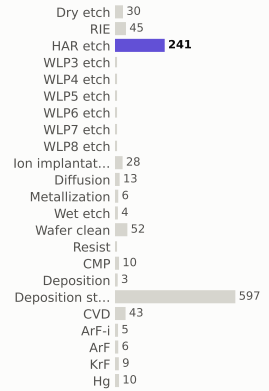

materials deposited (g)

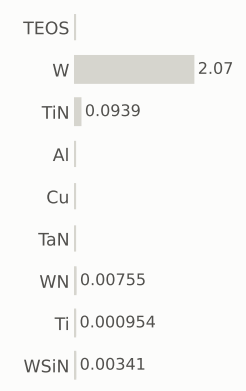

gases emitted (g)

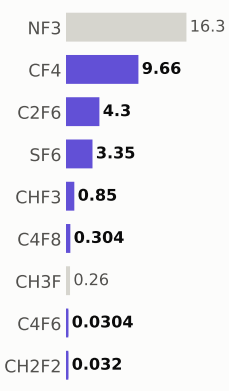

Step #14732.2148: HAR_etch

etch_noop · HAR_etch

1.04	1,497.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

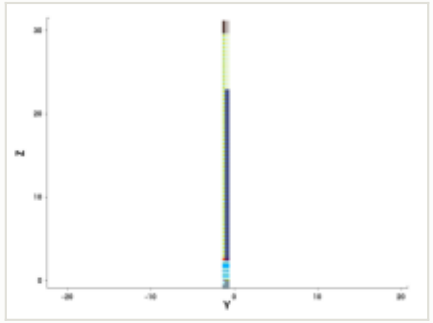

y cut at -1.035 µm

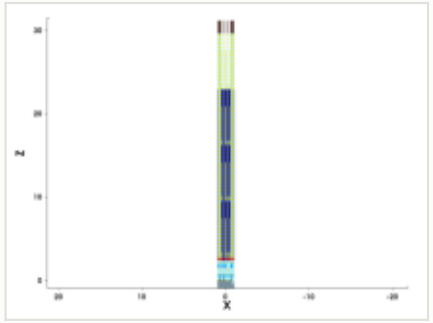

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

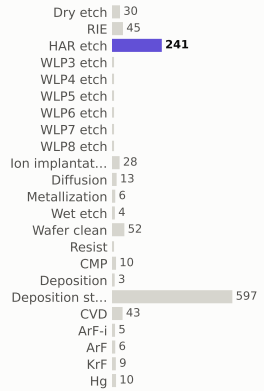

materials deposited (g)

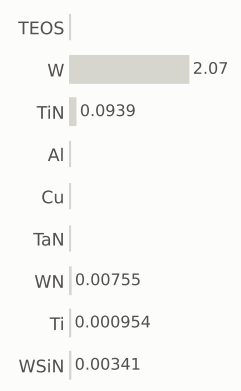

gases emitted (g)

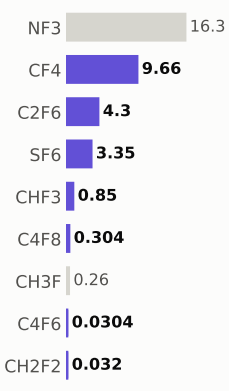

Step #14732.2819: HAR_etch

etch_noop · HAR_etch

1.04	1,498.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

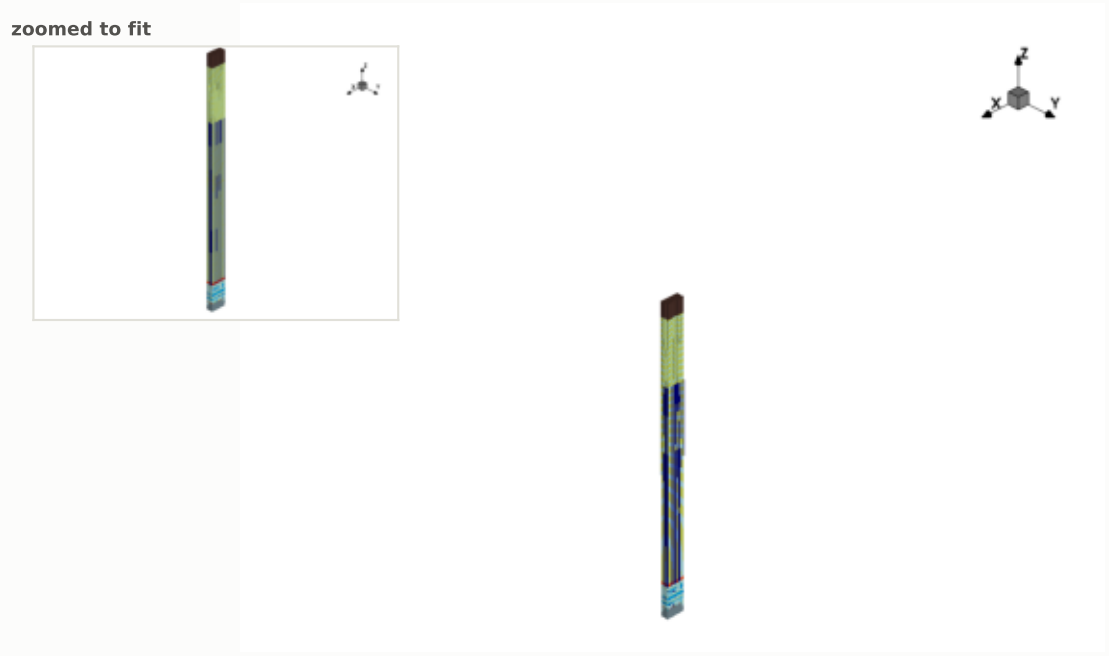

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

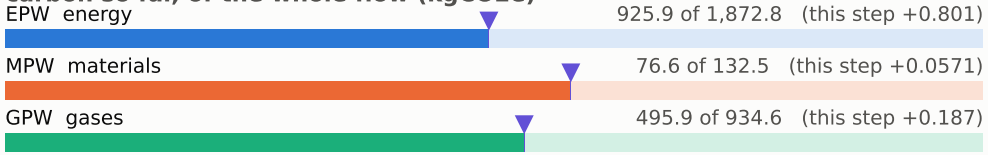

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

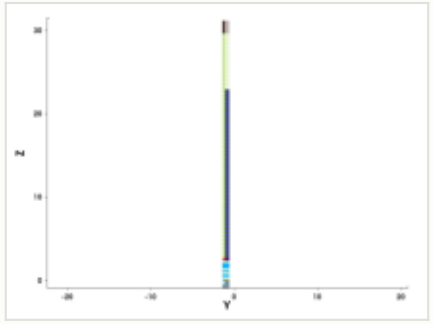

y cut at -1.035 µm

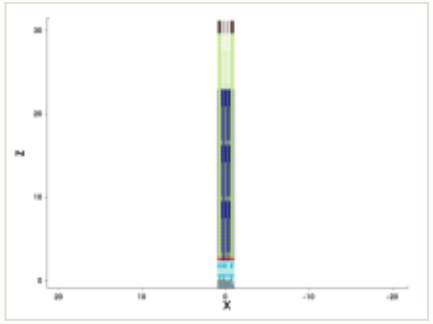

mask for this step

no mask for this step

steps by process area

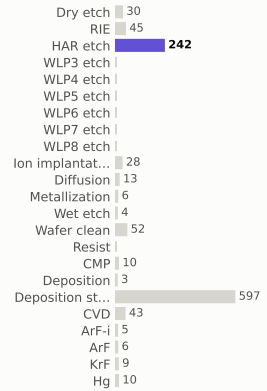

materials deposited (g)

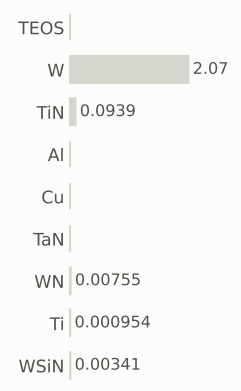

gases emitted (g)

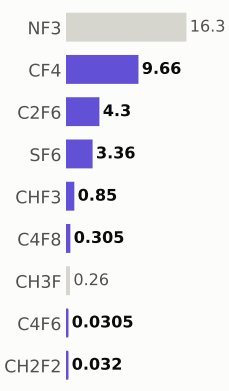

Step #14732.349: HAR_etch

etch_noop · HAR_etch

1.04	1,499.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

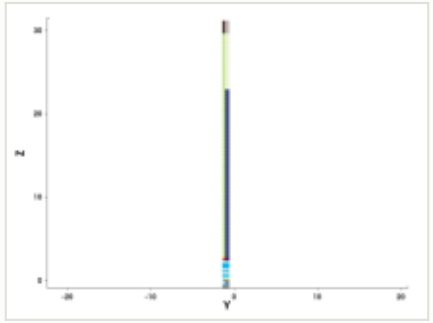

y cut at -1.035 µm

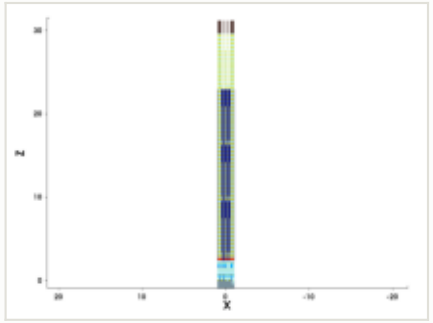

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

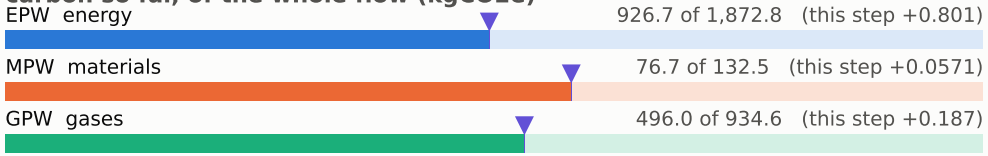

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

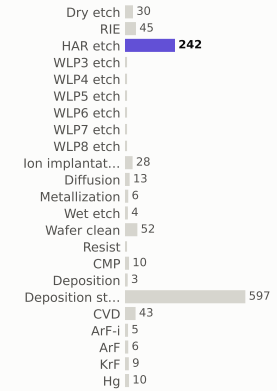

materials deposited (g)

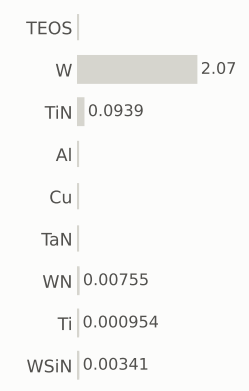

gases emitted (g)

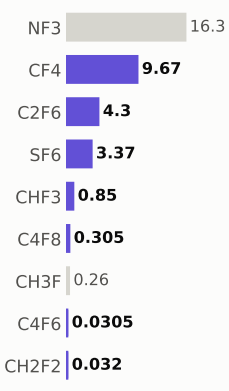

Step #14732.4161: HAR_etch

etch_noop · HAR_etch

1.04	1,500.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

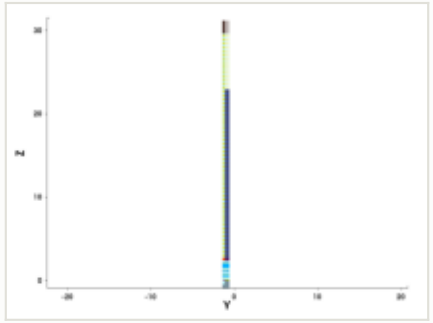

y cut at -1.035 µm

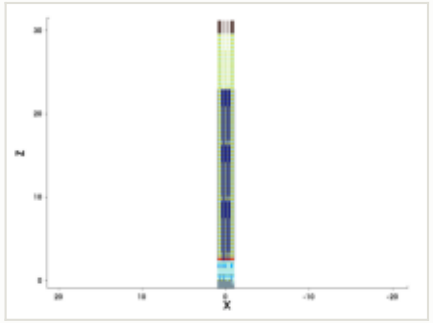

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

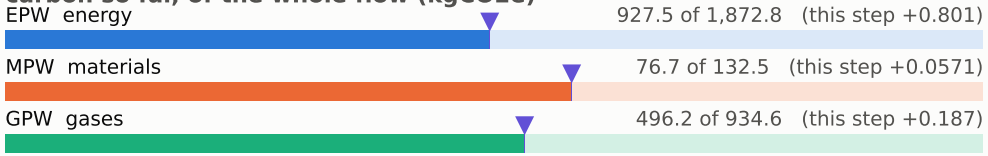

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

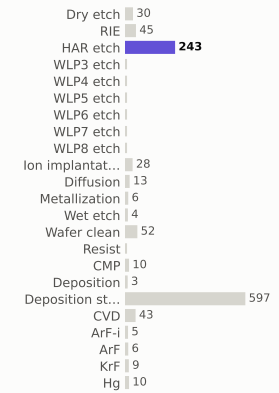

materials deposited (g)

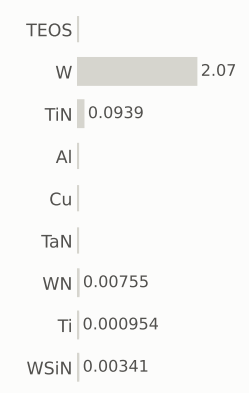

gases emitted (g)

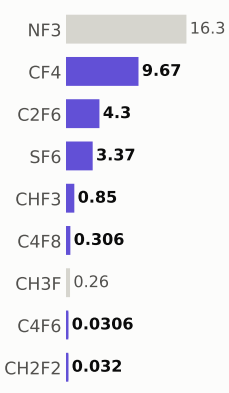

Step #14732.4832: HAR_etch

etch_noop · HAR_etch

1.04	1,501.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

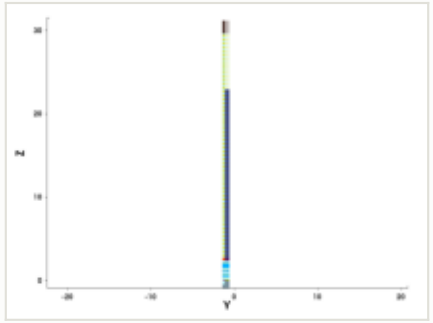

y cut at -1.035 µm

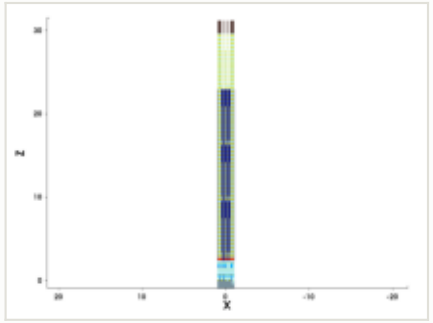

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

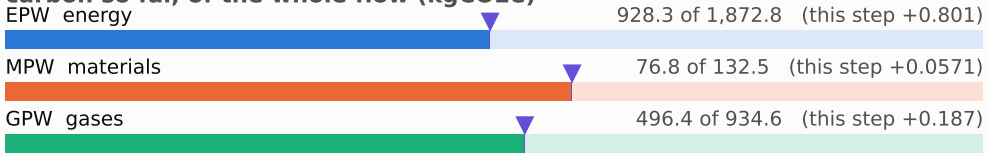

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

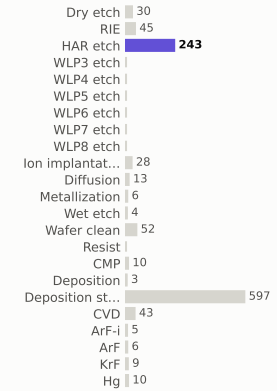

materials deposited (g)

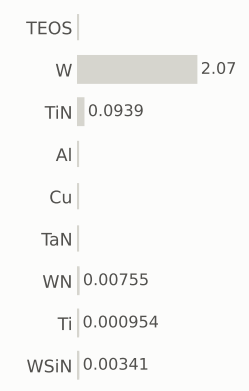

gases emitted (g)

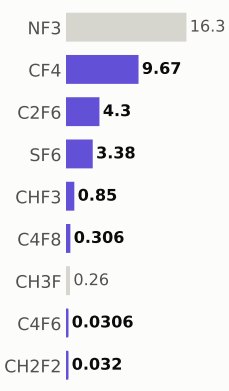

Step #14732.5503: HAR_etch

etch_noop · HAR_etch

1.04	1,502.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

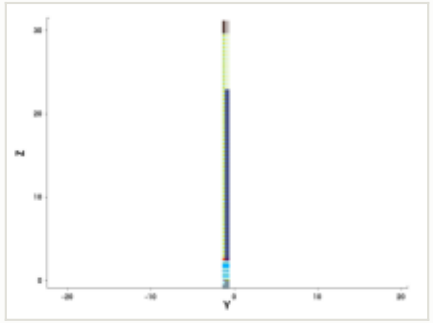

y cut at -1.035 µm

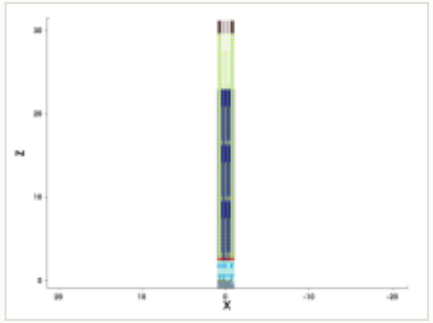

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

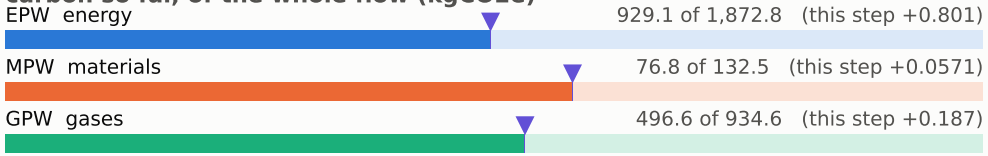

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

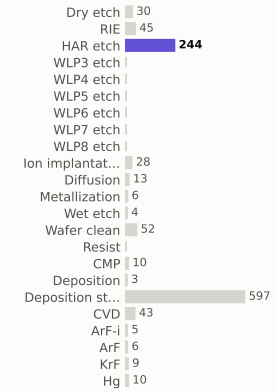

materials deposited (g)

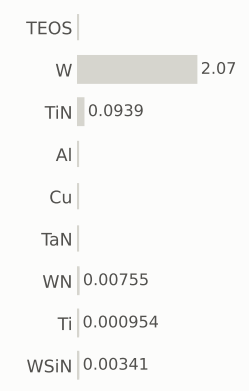

gases emitted (g)

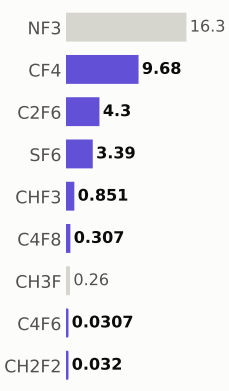

Step #14732.6174: HAR_etch

etch_noop · HAR_etch

1.04	1,503.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

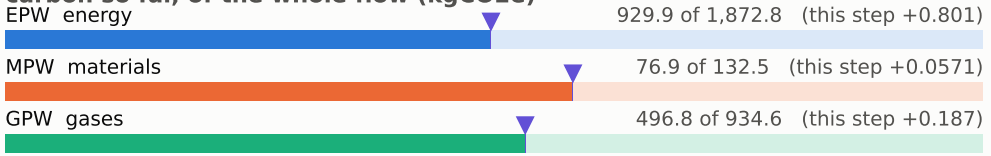

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

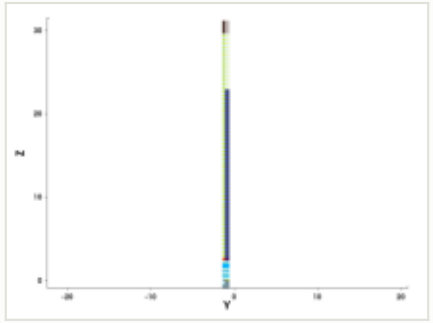

y cut at -1.035 µm

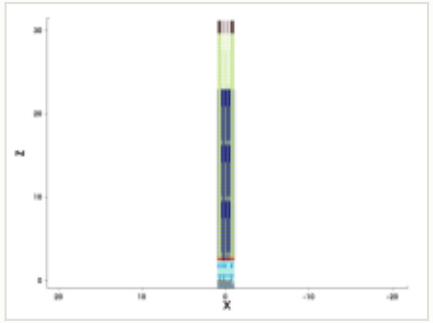

mask for this step

no mask for this step

steps by process area

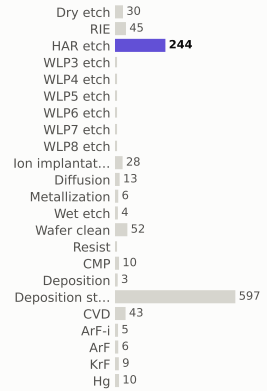

materials deposited (g)

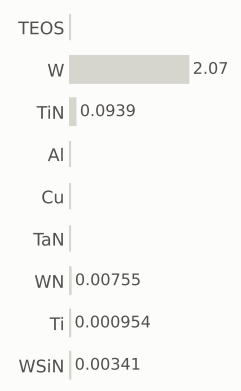

gases emitted (g)

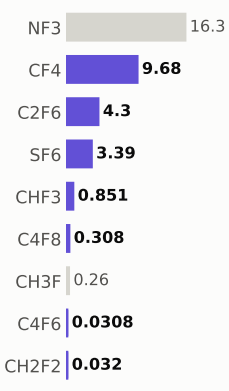

Step #14732.6846: HAR_etch

etch_noop · HAR_etch

1.04	1,504.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

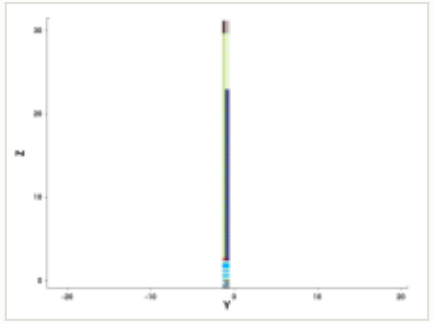

y cut at -1.035 µm

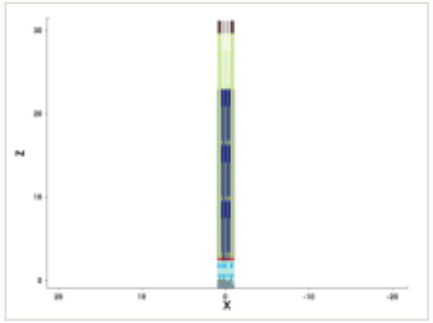

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

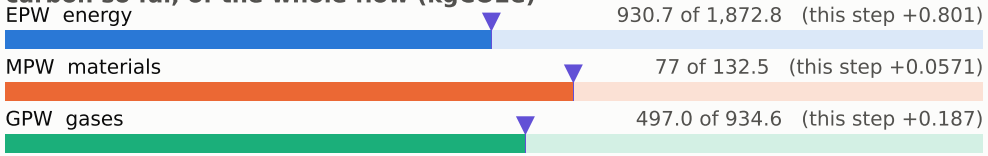

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

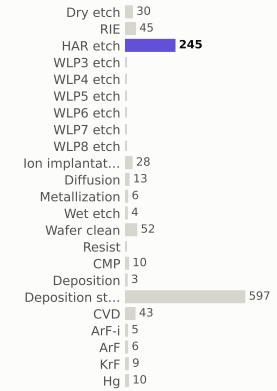

materials deposited (g)

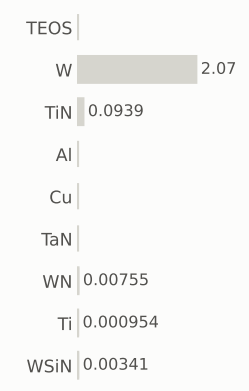

gases emitted (g)

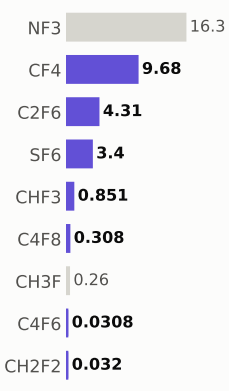

Step #14732.7517: HAR_etch

etch_noop · HAR_etch

1.04	1,505.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

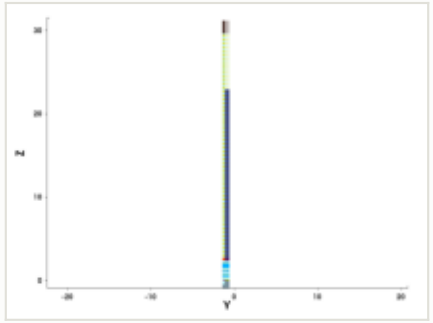

y cut at -1.035 µm

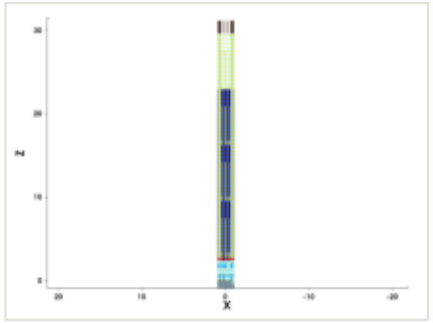

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

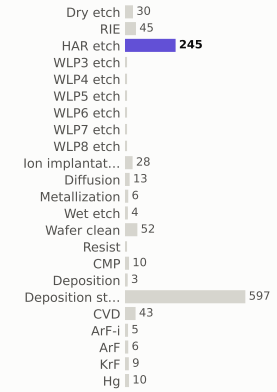

materials deposited (g)

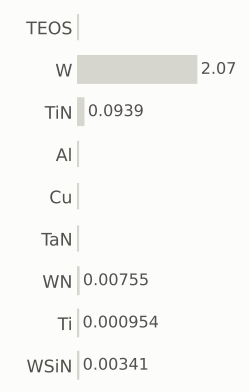

gases emitted (g)

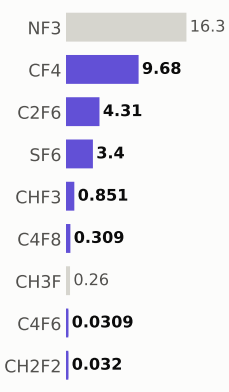

Step #14732.8188: HAR_etch

etch_noop · HAR_etch

1.04	1,506.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

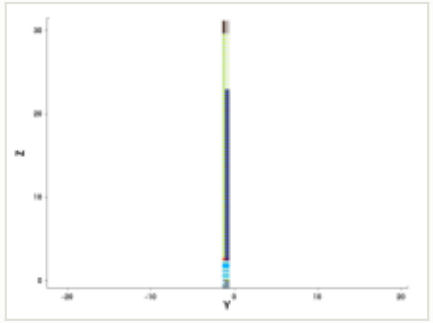

y cut at -1.035 µm

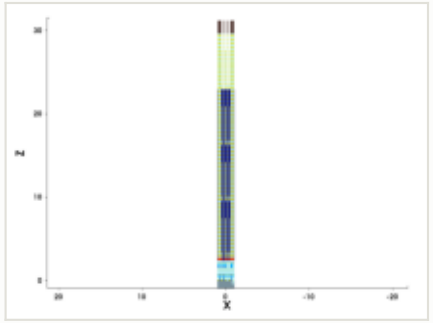

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

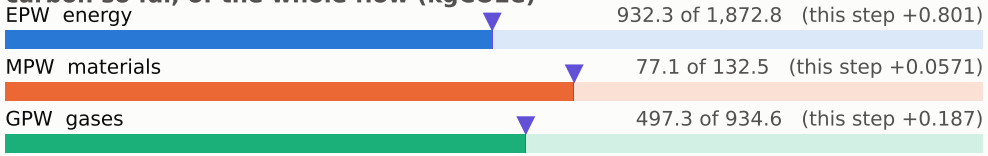

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

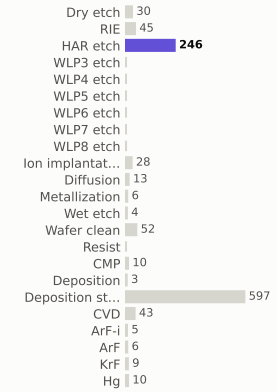

materials deposited (g)

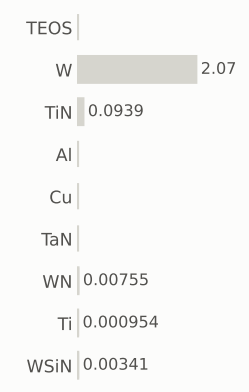

gases emitted (g)

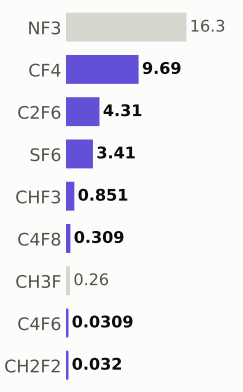

Step #14732.8859: HAR_etch

etch_noop · HAR_etch

1.04	1,507.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

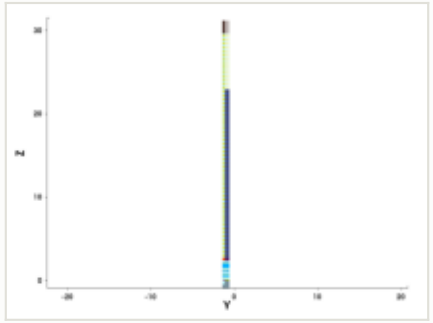

y cut at -1.035 µm

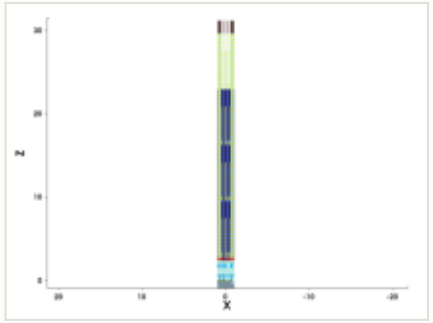

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

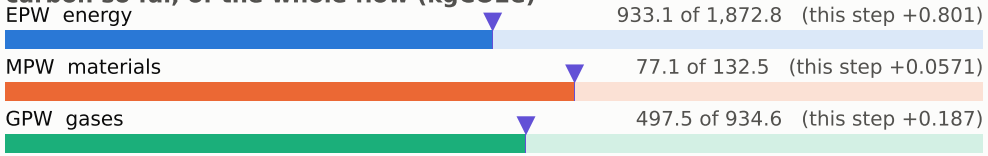

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

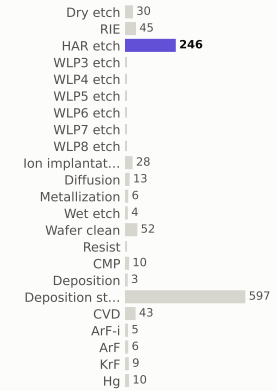

materials deposited (g)

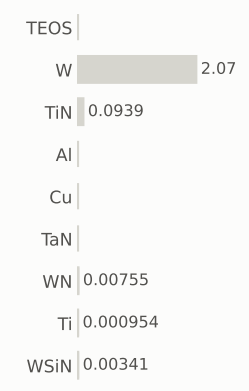

gases emitted (g)

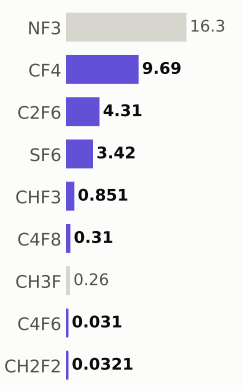

Step #14732.953: HAR_etch

etch_noop · HAR_etch

1.04	1,508.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

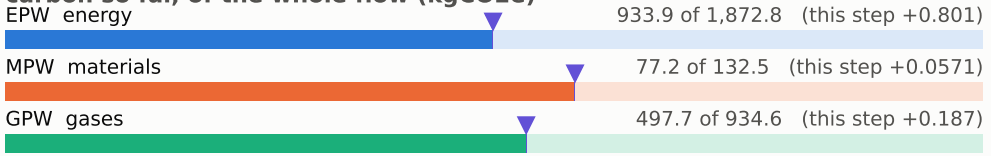

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

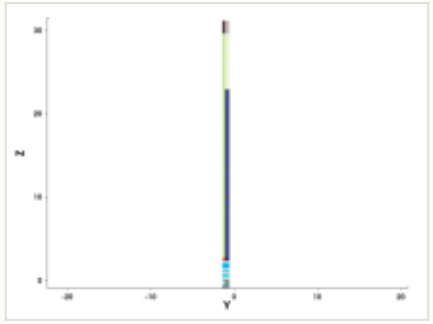

y cut at -1.035 µm

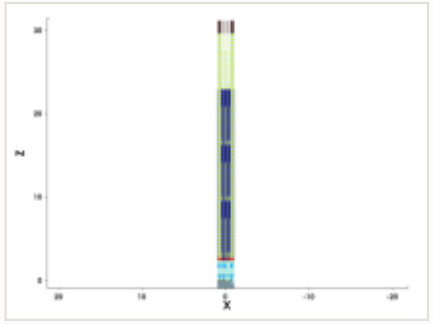

mask for this step

no mask for this step

steps by process area

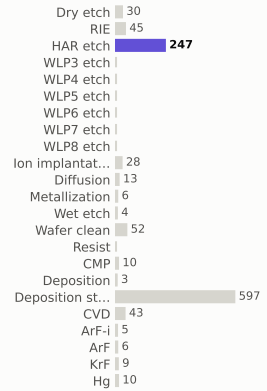

materials deposited (g)

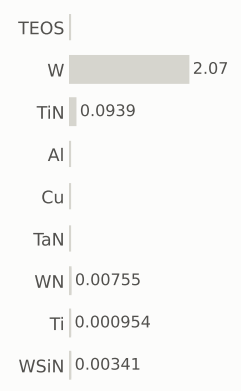

gases emitted (g)

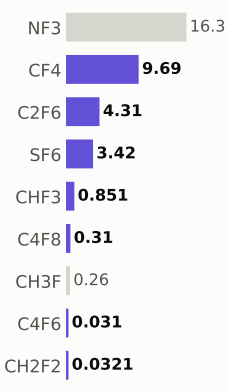

Step #14733.0201: HAR_etch

etch_noop · HAR_etch

1.04	1,509.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

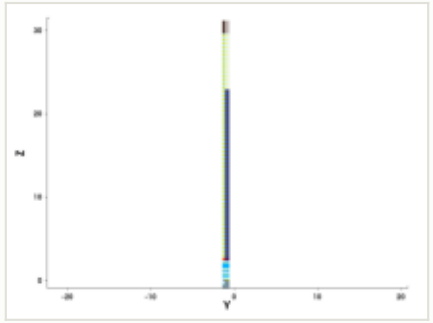

y cut at -1.035 µm

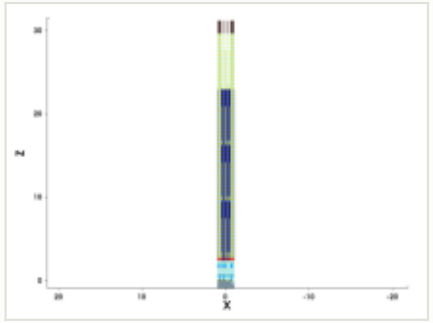

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

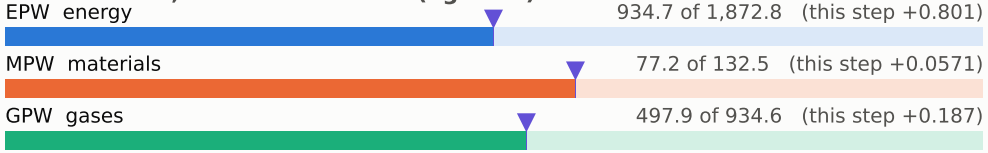

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

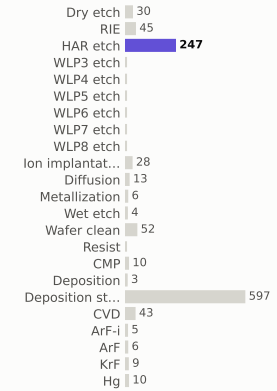

materials deposited (g)

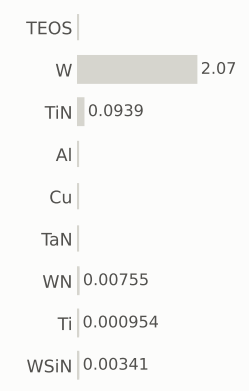

gases emitted (g)

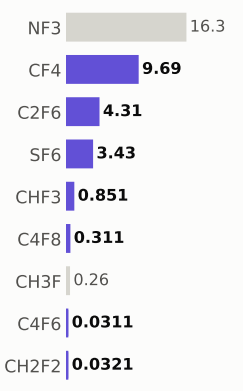

Step #14733.0872: HAR_etch

etch_noop · HAR_etch

1.04	1,510.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

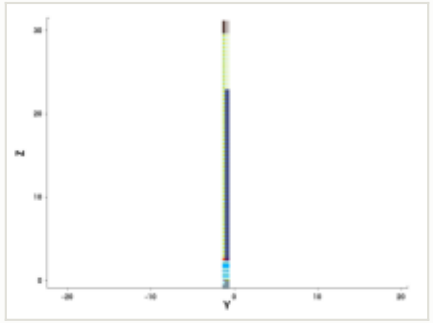

y cut at -1.035 µm

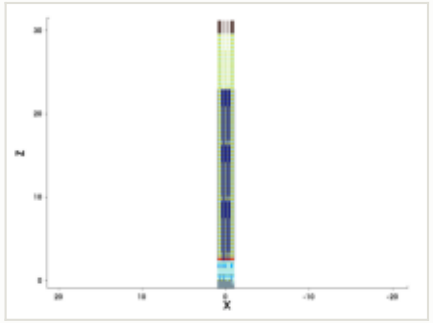

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

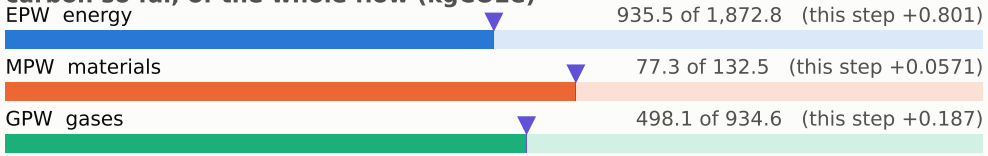

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

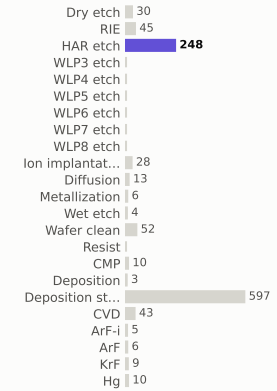

materials deposited (g)

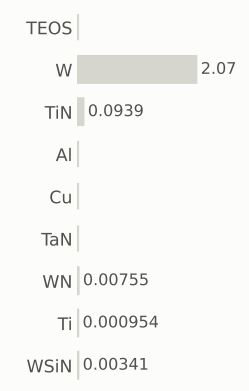

gases emitted (g)

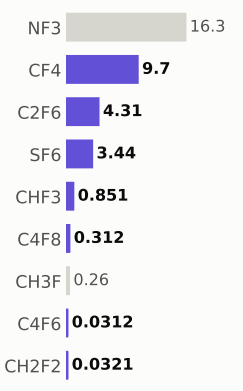

Step #14733.1544: HAR_etch

etch_noop · HAR_etch

1.04	1,512.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

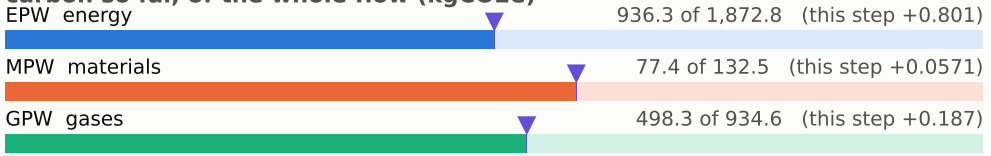

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

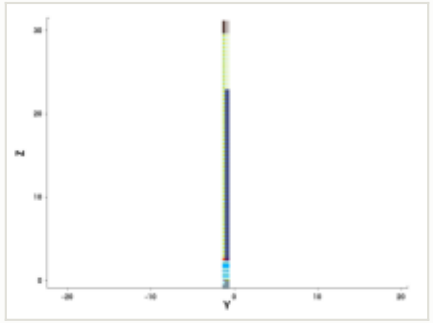

y cut at -1.035 µm

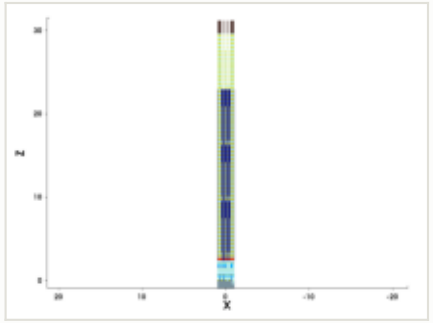

mask for this step

no mask for this step

steps by process area

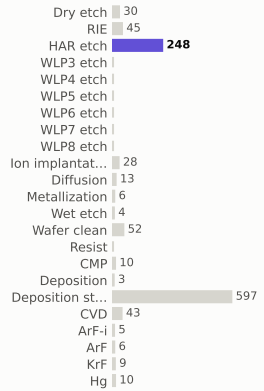

materials deposited (g)

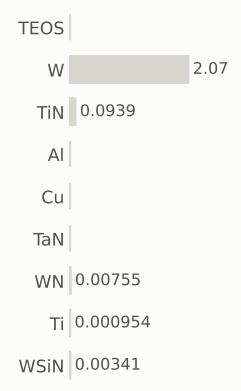

gases emitted (g)

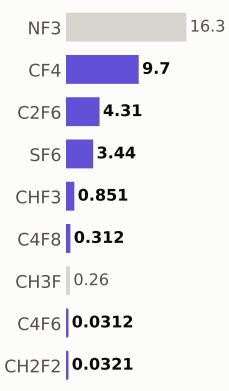

Step #14733.2215: HAR_etch

etch_noop · HAR_etch

1.04	1,513.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

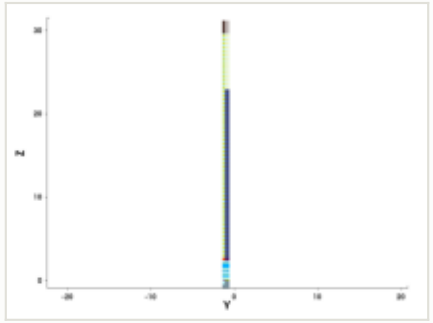

y cut at -1.035 µm

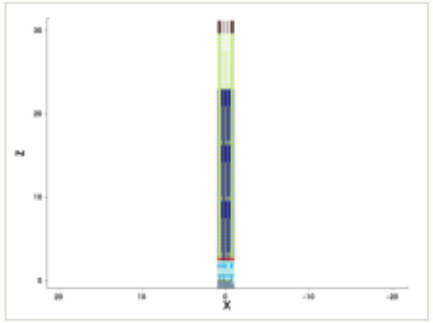

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

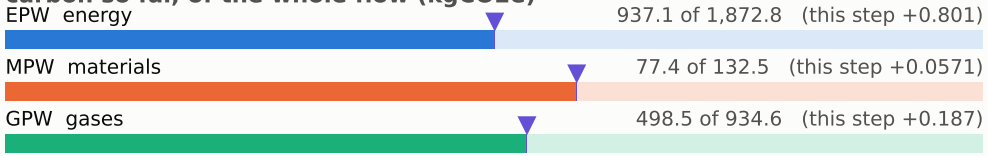

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

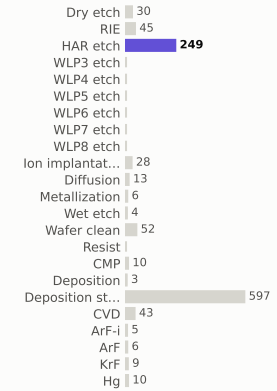

materials deposited (g)

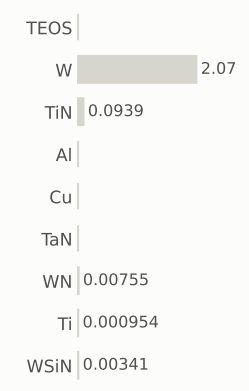

gases emitted (g)

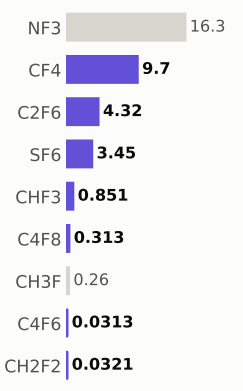

Step #14733.2886: HAR_etch

etch_noop · HAR_etch

1.04	1,514.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

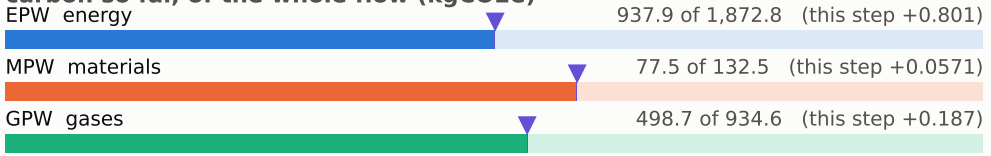

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

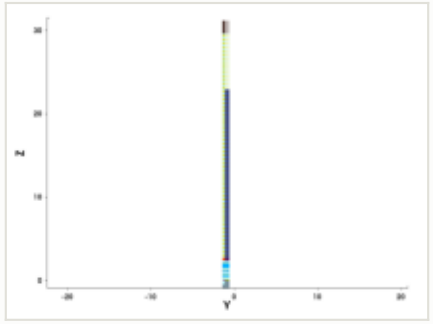

y cut at -1.035 µm

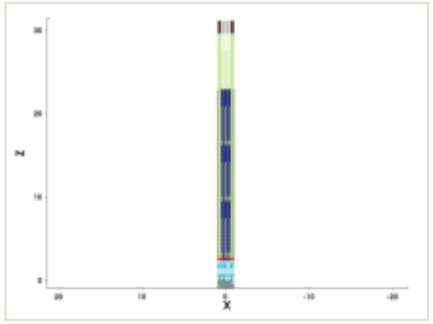

mask for this step

no mask for this step

steps by process area

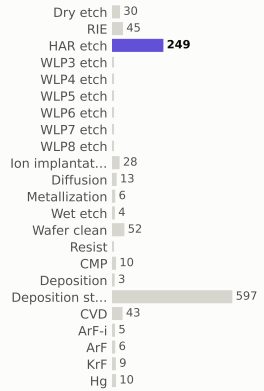

materials deposited (g)

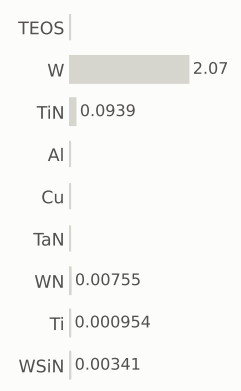

gases emitted (g)

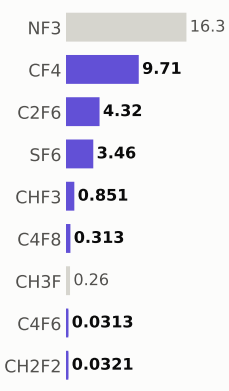

Step #14733.3557: HAR_etch

etch_noop · HAR_etch

1.04	1,515.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

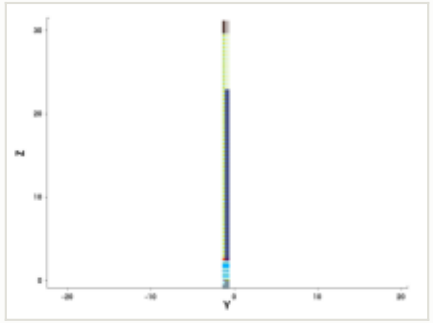

y cut at -1.035 µm

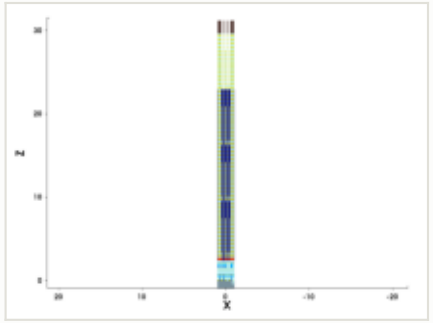

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

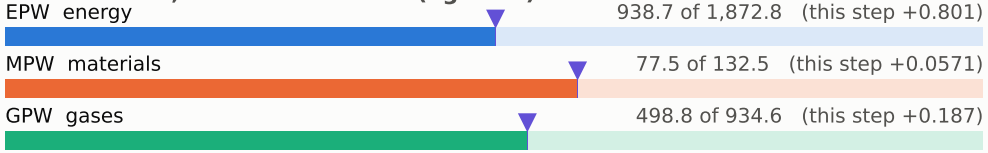

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

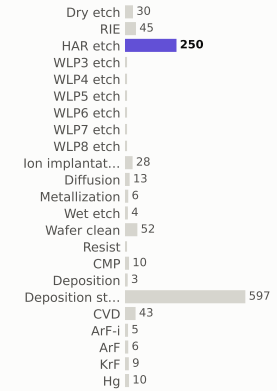

materials deposited (g)

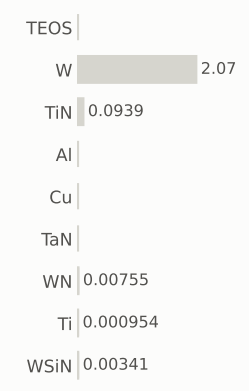

gases emitted (g)

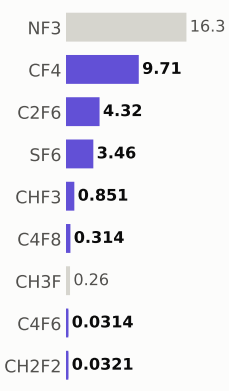

Step #14733.4228: HAR_etch

etch_noop · HAR_etch

1.04	1,516.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

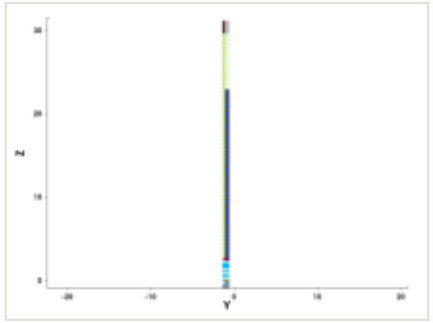

y cut at -1.035 µm

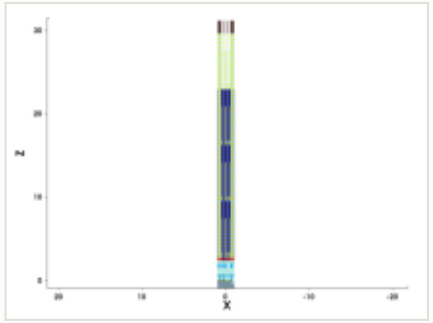

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

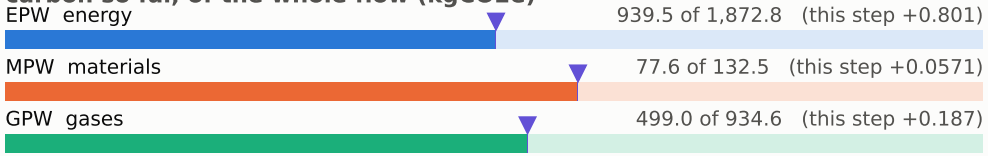

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

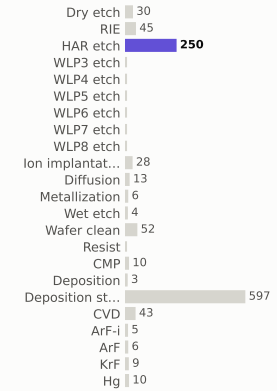

materials deposited (g)

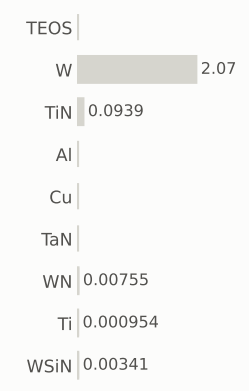

gases emitted (g)

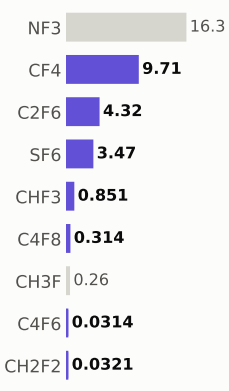

Step #14733.4899: HAR_etch

etch_noop · HAR_etch

1.04	1,517.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

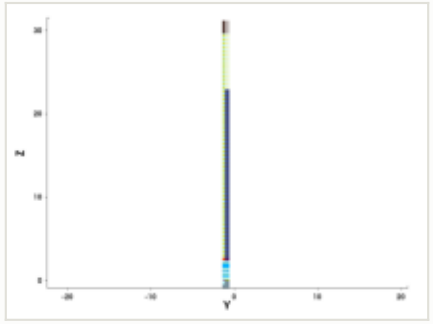

y cut at -1.035 µm

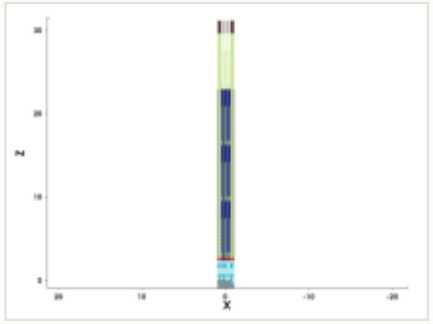

mask for this step

no mask for this step

steps by process area

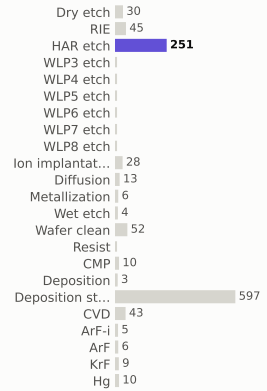

materials deposited (g)

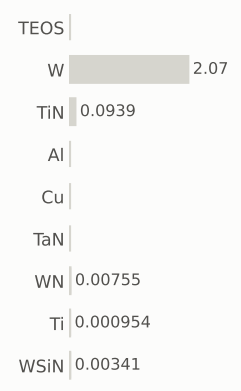

gases emitted (g)

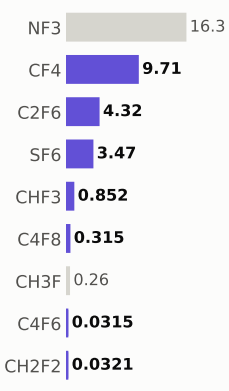

Step #14733.557: HAR_etch

etch_noop · HAR_etch

1.04	1,518.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

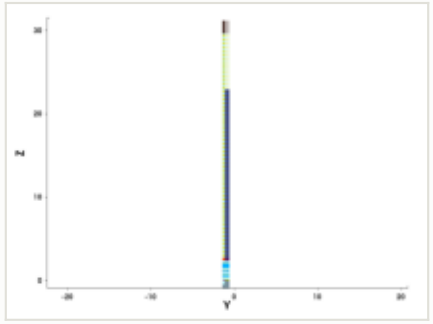

y cut at -1.035 µm

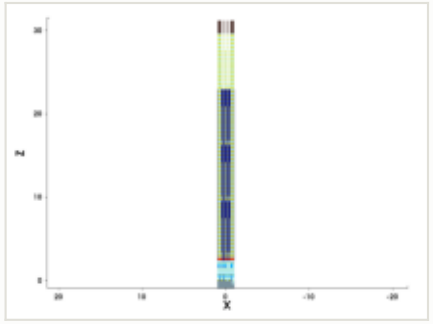

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

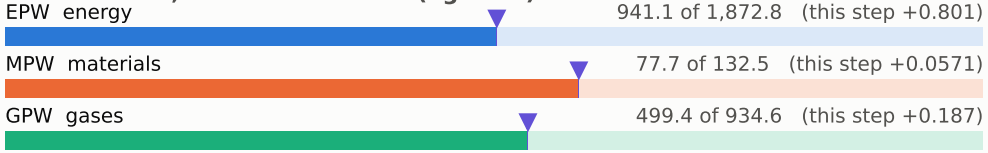

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

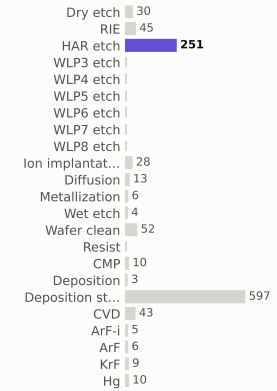

materials deposited (g)

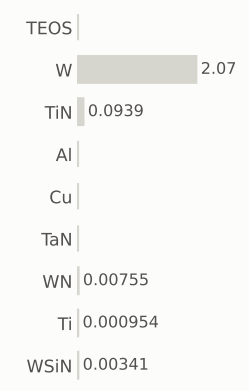

gases emitted (g)

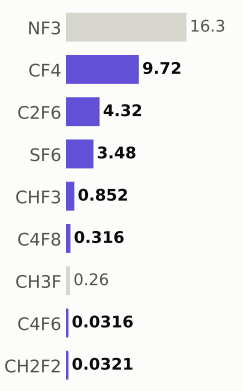

Step #14733.6242: HAR_etch

etch_noop · HAR_etch

1.04	1,519.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

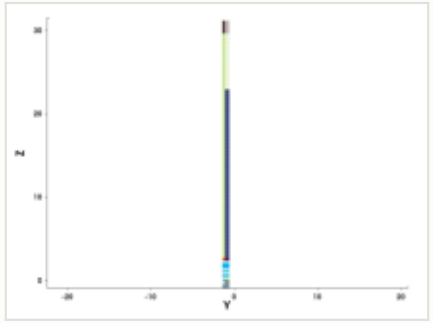

y cut at -1.035 µm

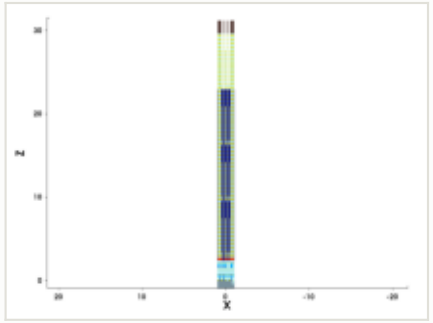

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

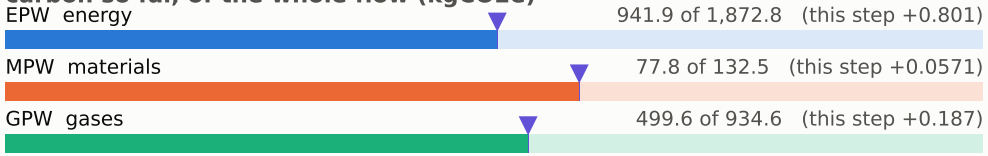

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

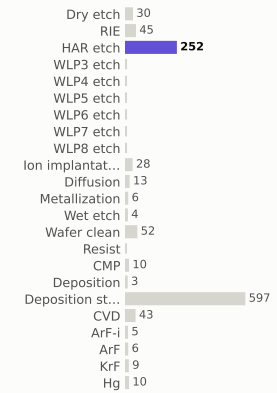

materials deposited (g)

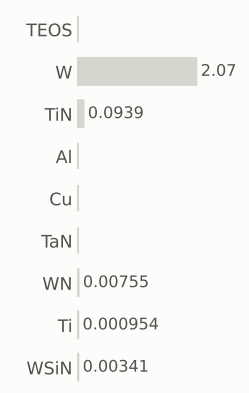

gases emitted (g)

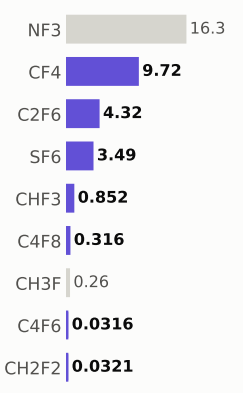

Step #14733.6913: HAR_etch

etch_noop · HAR_etch

1.04	1,520.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

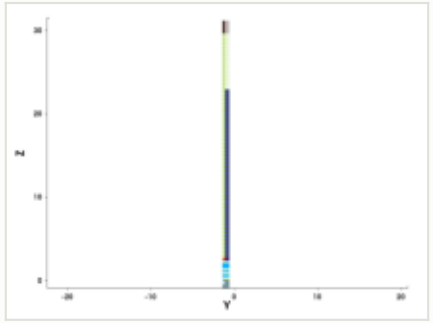

y cut at -1.035 µm

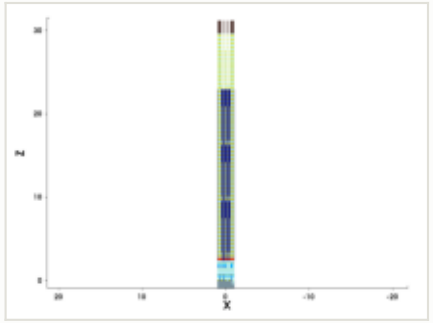

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

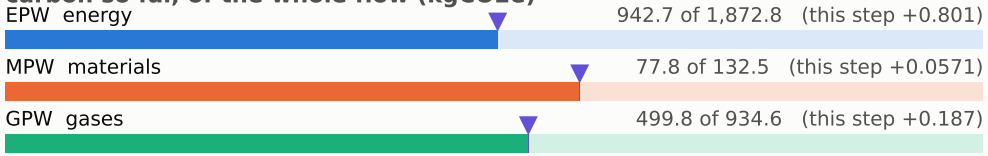

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

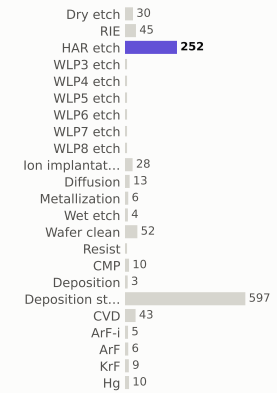

materials deposited (g)

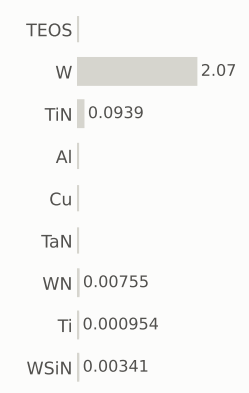

gases emitted (g)

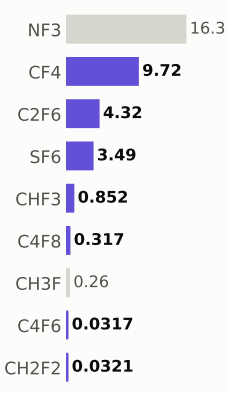

Step #14733.7584: HAR_etch

etch_noop · HAR_etch

1.04	1,521.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

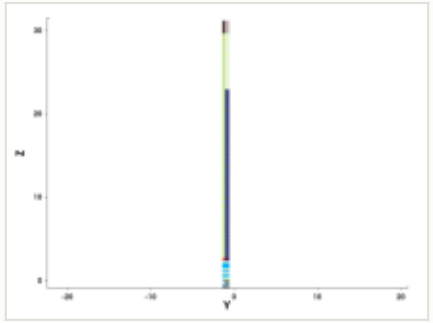

y cut at -1.035 µm

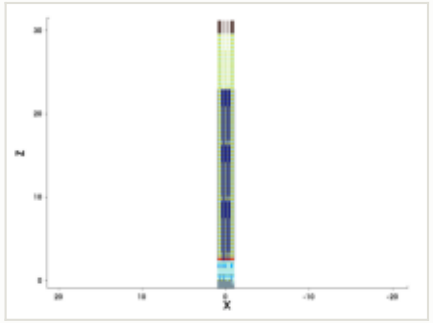

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

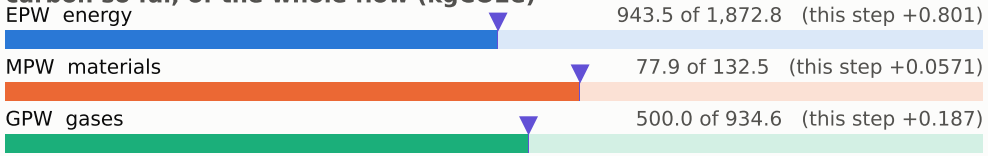

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

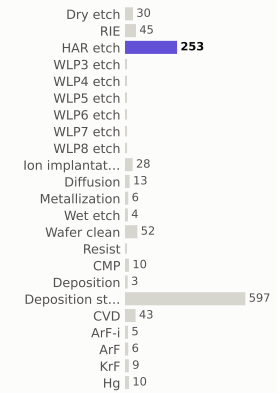

materials deposited (g)

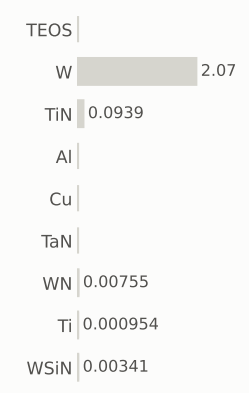

gases emitted (g)

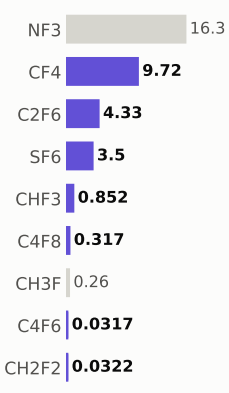

Step #14733.8255: HAR_etch

etch_noop · HAR_etch

1.04	1,522.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

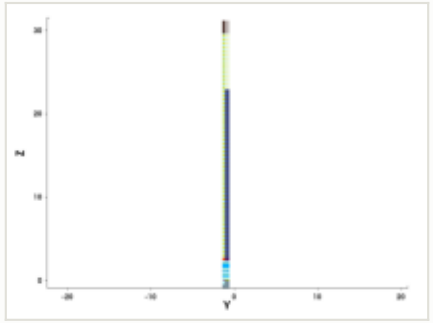

y cut at -1.035 µm

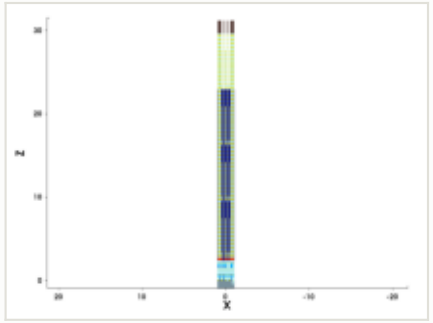

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

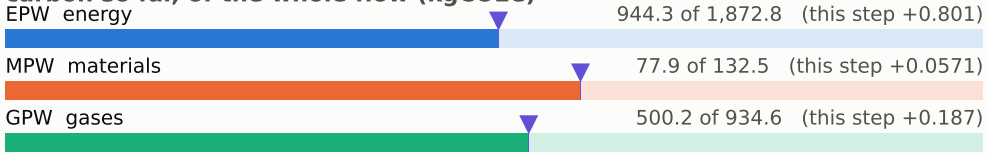

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

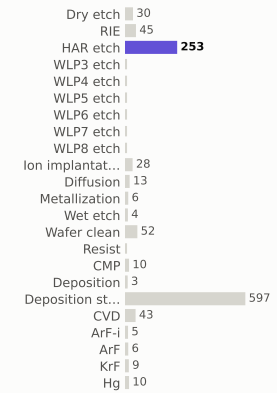

materials deposited (g)

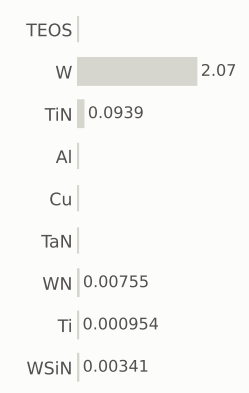

gases emitted (g)

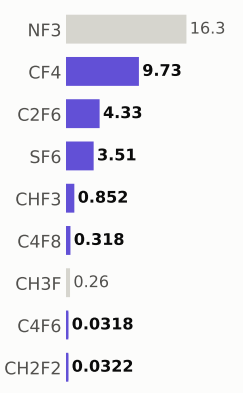

Step #14733.8926: HAR_etch

etch_noop · HAR_etch

1.04	1,523.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

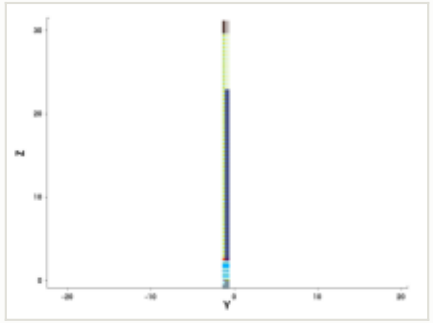

y cut at -1.035 µm

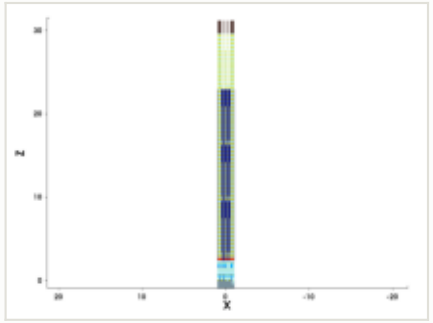

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

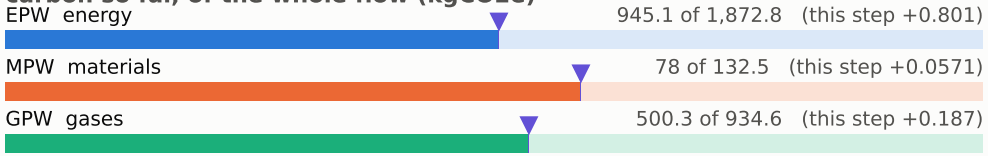

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

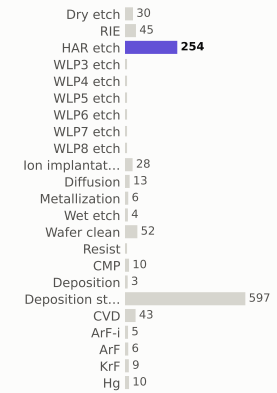

materials deposited (g)

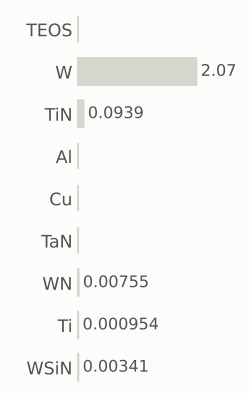

gases emitted (g)

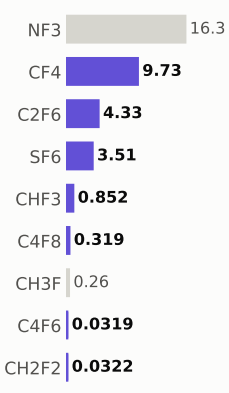

Step #14733.9597: HAR_etch

etch_noop · HAR_etch

1.04	1,524.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

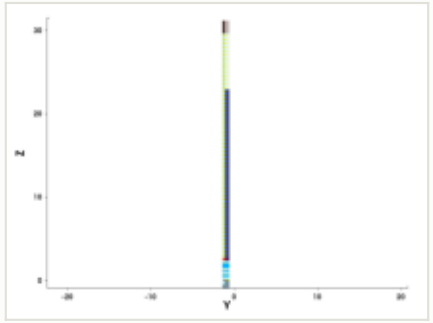

y cut at -1.035 µm

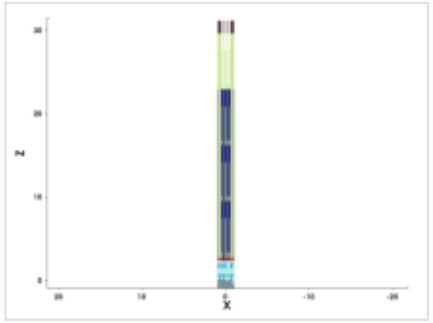

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

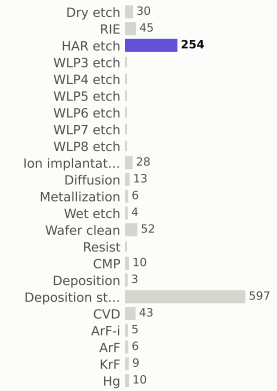

materials deposited (g)

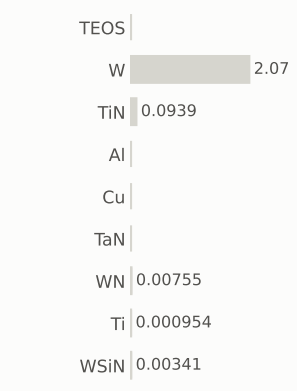

gases emitted (g)

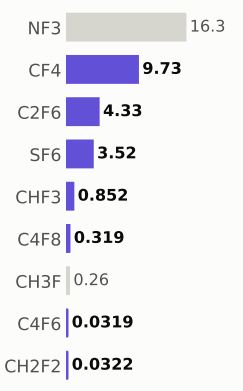

Step #14734.0268: HAR_etch

etch_noop · HAR_etch

1.04	1,525.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

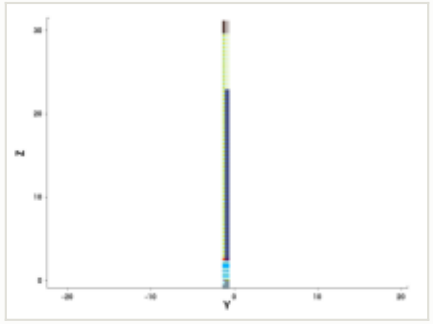

y cut at -1.035 µm

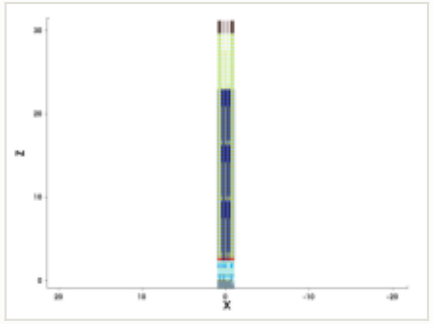

mask for this step

no mask for this step

steps by process area

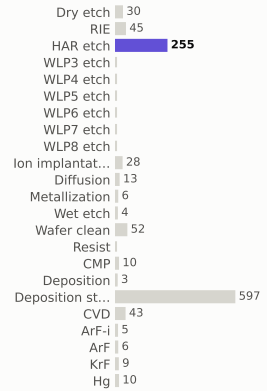

materials deposited (g)

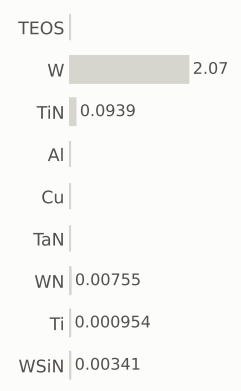

gases emitted (g)

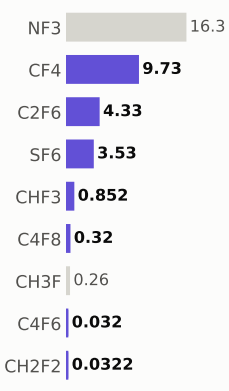

Step #14734.094: HAR_etch

etch_noop · HAR_etch

1.04	1,526.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

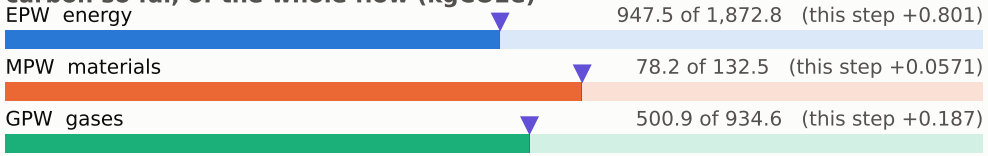

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

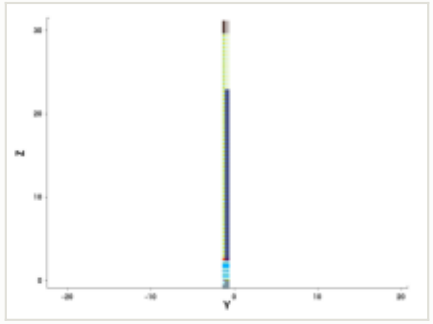

y cut at -1.035 µm

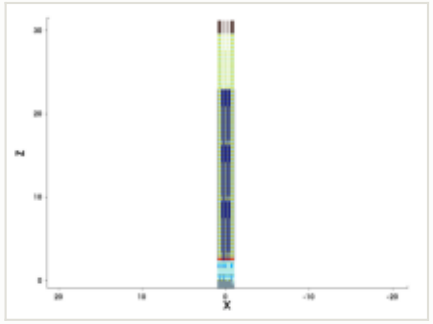

mask for this step

no mask for this step

steps by process area

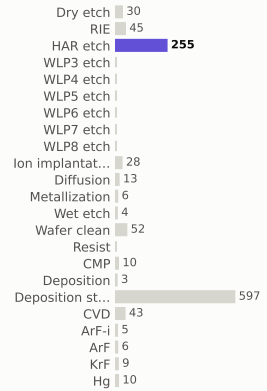

materials deposited (g)

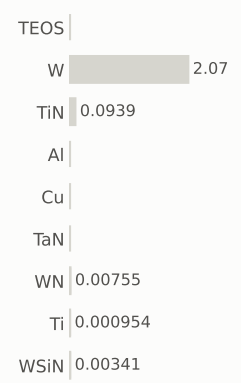

gases emitted (g)

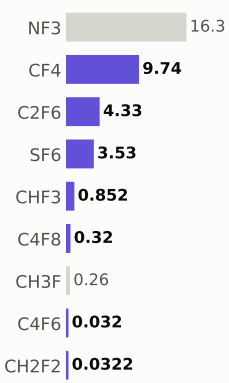

Step #14734.1611: HAR_etch

etch_noop · HAR_etch

1.04	1,527.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

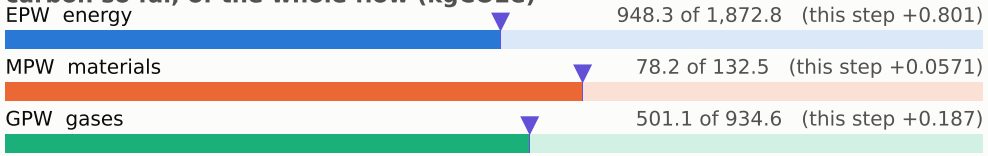

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

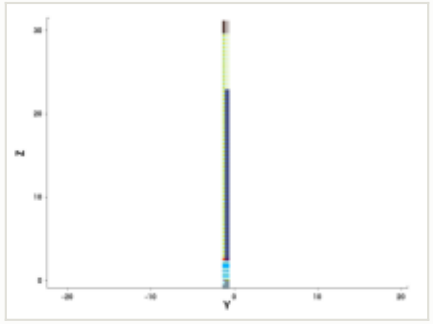

y cut at -1.035 µm

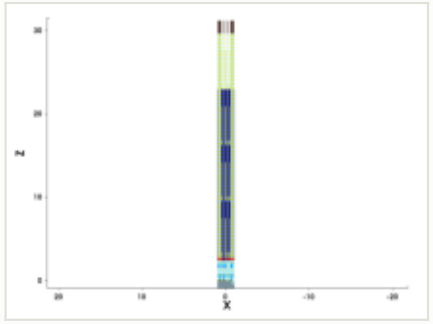

mask for this step

no mask for this step

steps by process area

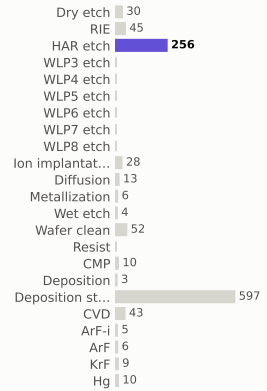

materials deposited (g)

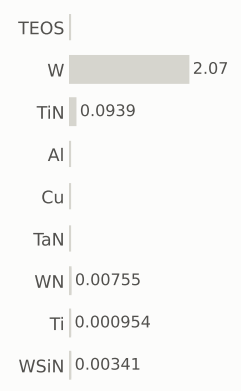

gases emitted (g)

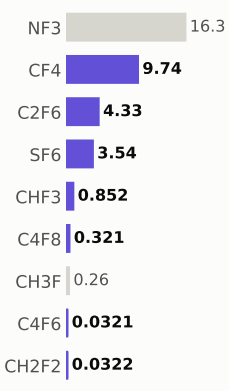

Step #14734.2282: HAR_etch

etch_noop · HAR_etch

1.04	1,528.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

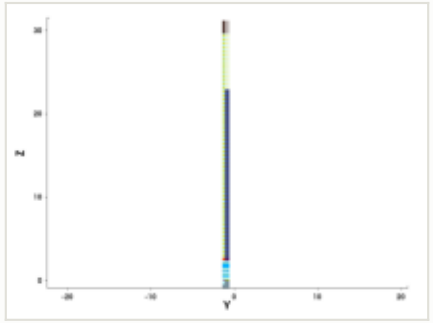

y cut at -1.035 µm

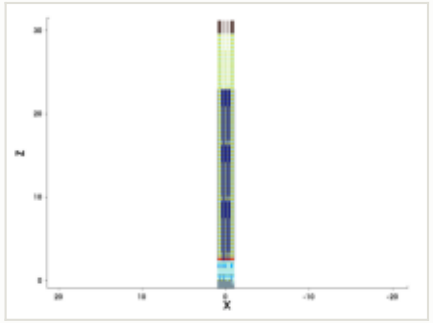

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

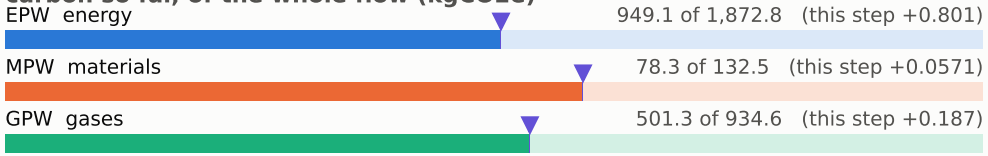

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

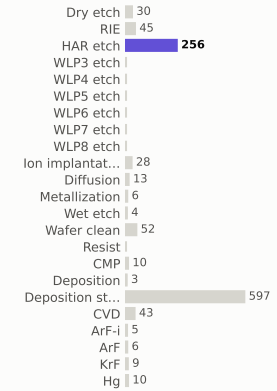

materials deposited (g)

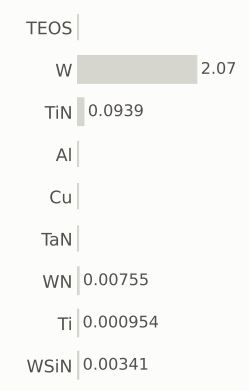

gases emitted (g)

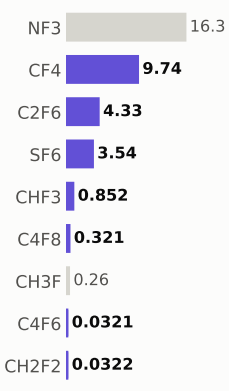

Step #14734.2953: HAR_etch

etch_noop · HAR_etch

1.04	1,529.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

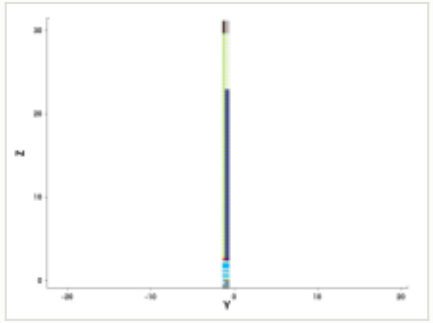

y cut at -1.035 µm

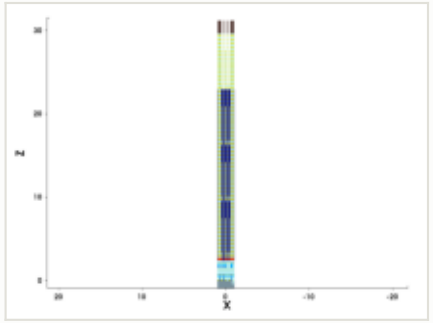

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

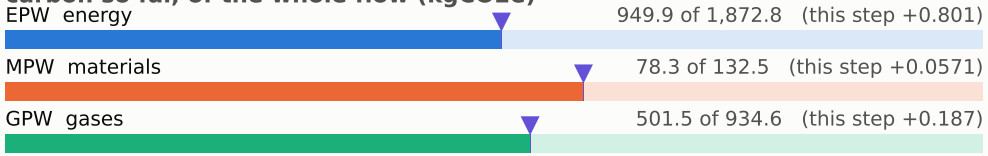

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

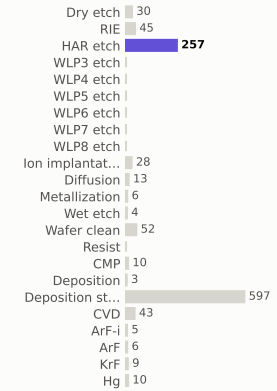

materials deposited (g)

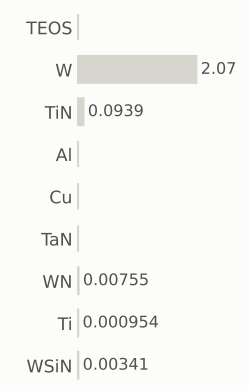

gases emitted (g)

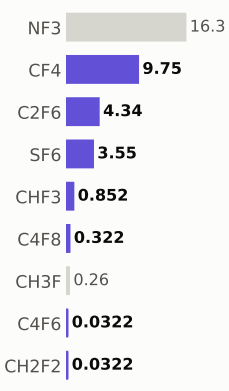

Step #14734.3624: HAR_etch

etch_noop · HAR_etch

1.04	1,530.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

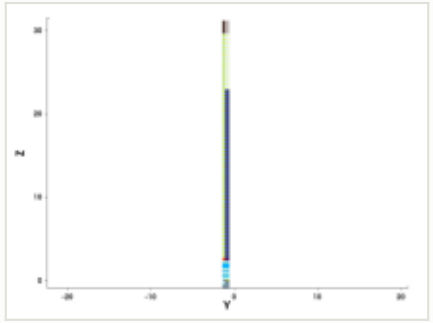

y cut at -1.035 µm

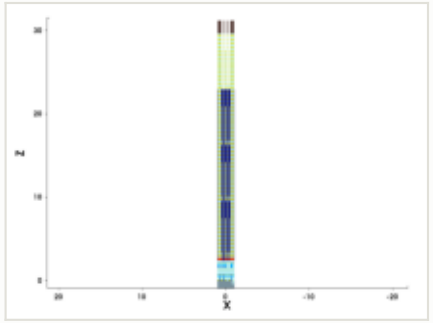

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

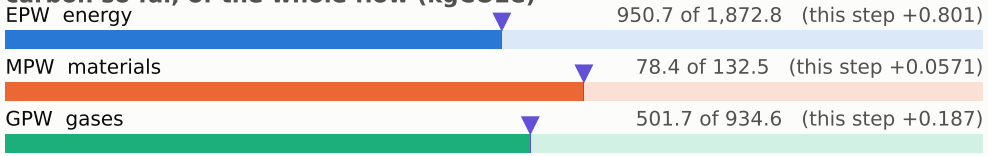

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

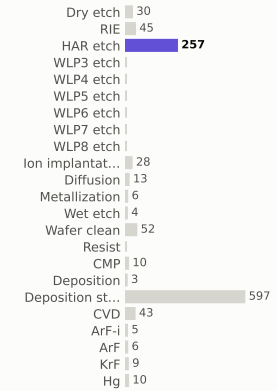

materials deposited (g)

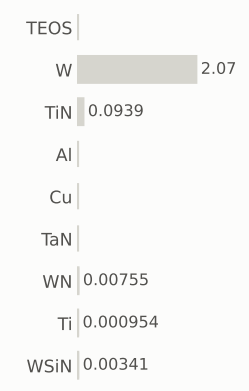

gases emitted (g)

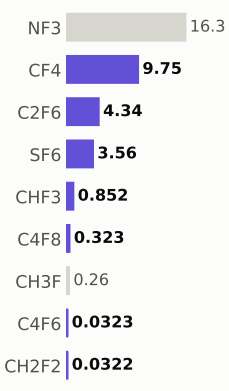

Step #14734.4295: HAR_etch

etch_noop · HAR_etch

1.04	1,531.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

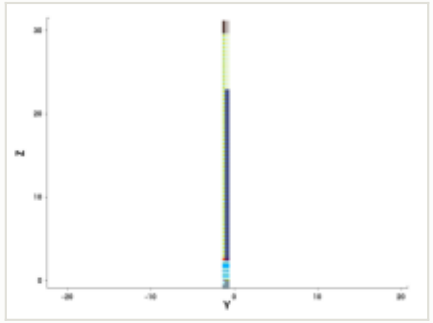

y cut at -1.035 µm

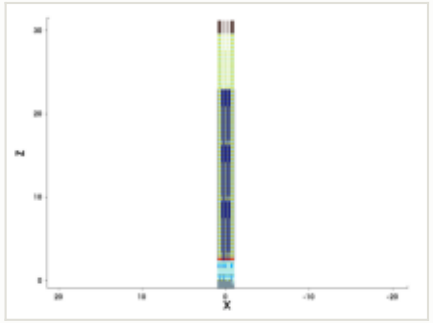

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

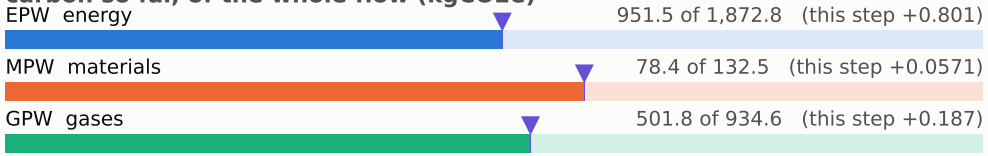

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

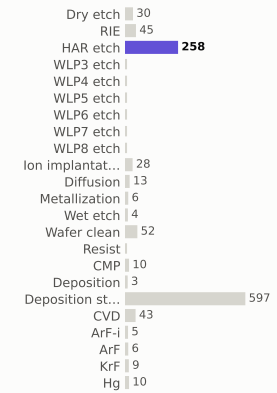

materials deposited (g)

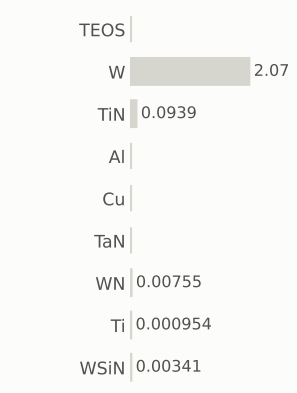

gases emitted (g)

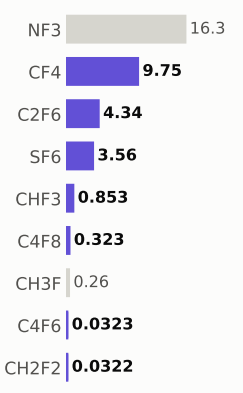

Step #14734.4966: HAR_etch

etch_noop · HAR_etch

1.04	1,532.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

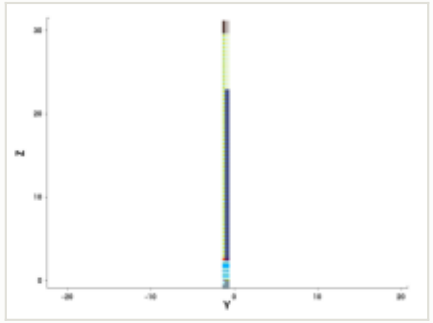

y cut at -1.035 µm

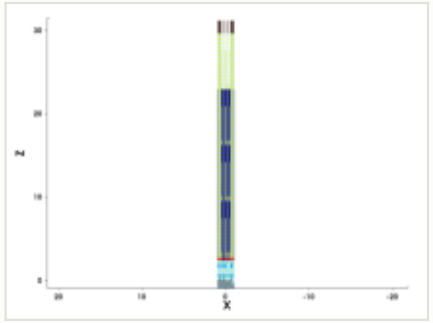

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

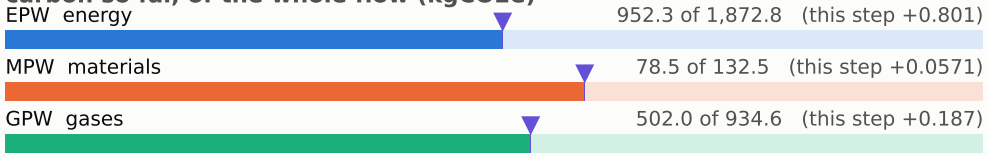

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

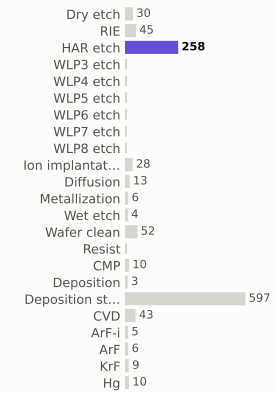

materials deposited (g)

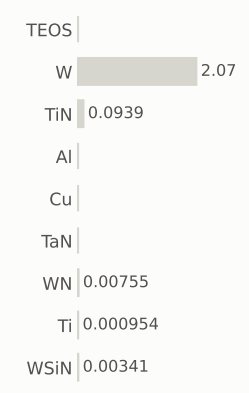

gases emitted (g)

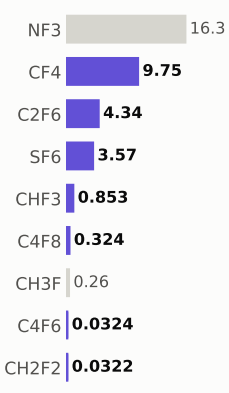

Step #14734.5638: HAR_etch

etch_noop · HAR_etch

1.04	1,533.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

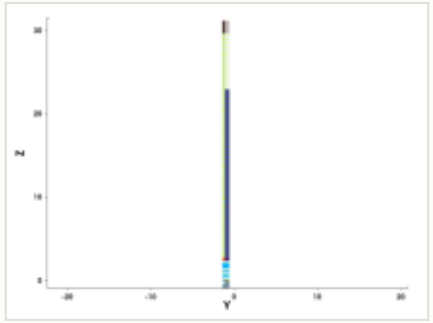

y cut at -1.035 µm

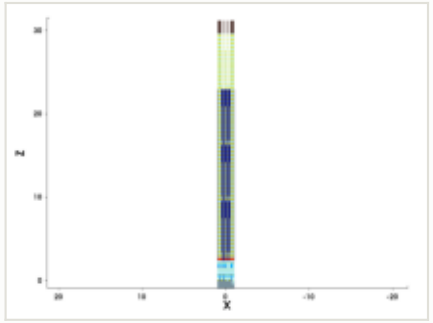

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

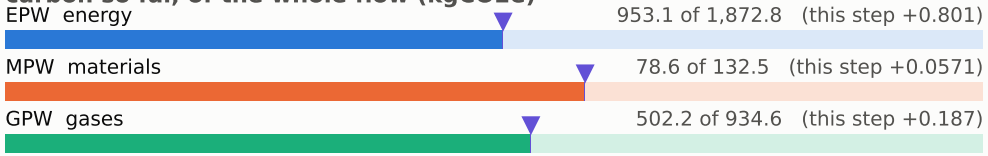

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

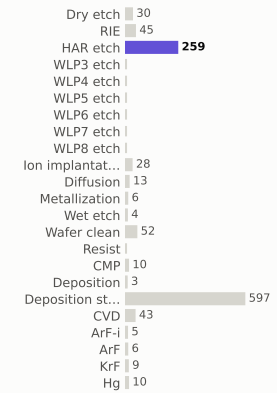

materials deposited (g)

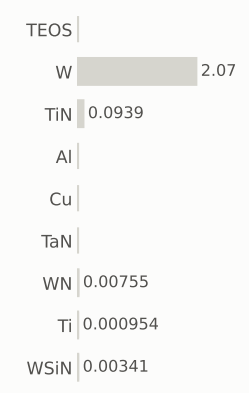

gases emitted (g)

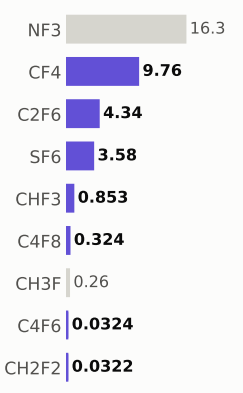

Step #14734.6309: HAR_etch

etch_noop · HAR_etch

1.04	1,535.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

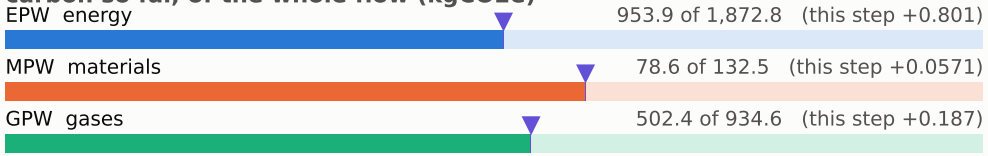

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

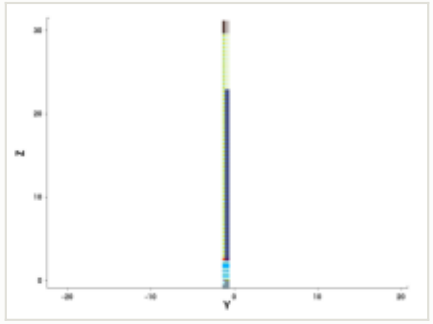

y cut at -1.035 µm

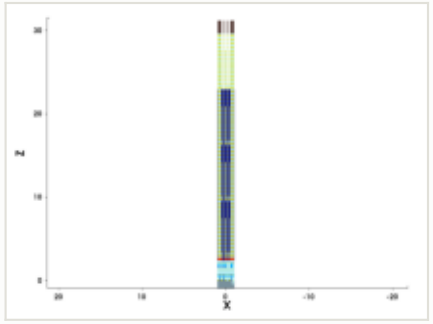

mask for this step

no mask for this step

steps by process area

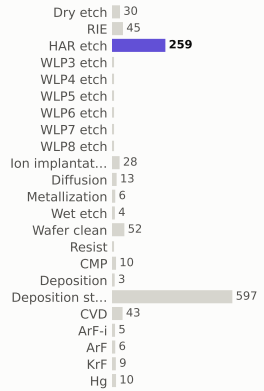

materials deposited (g)

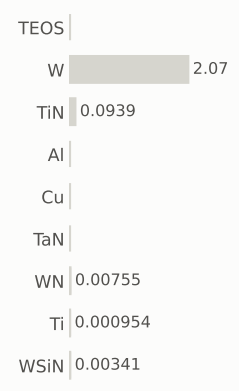

gases emitted (g)

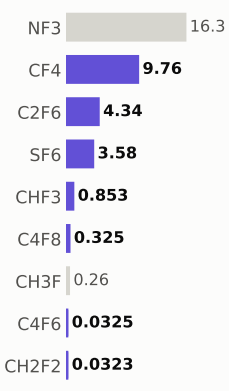

Step #14734.698: HAR_etch

etch_noop · HAR_etch

1.04	1,536.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

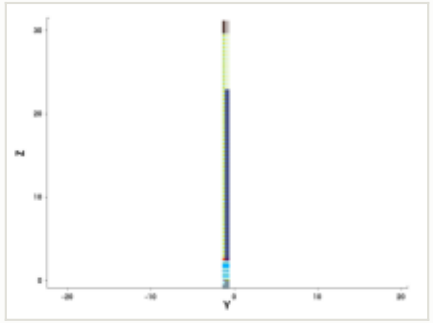

y cut at -1.035 µm

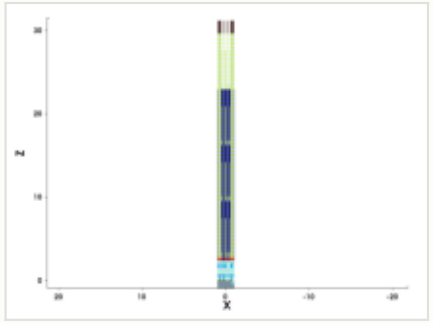

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

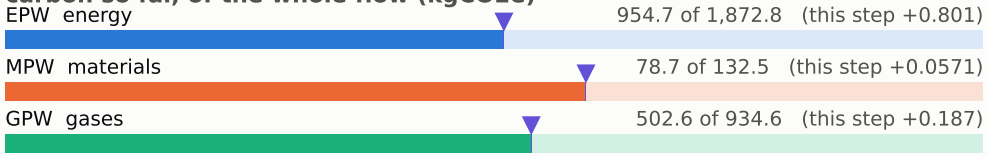

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

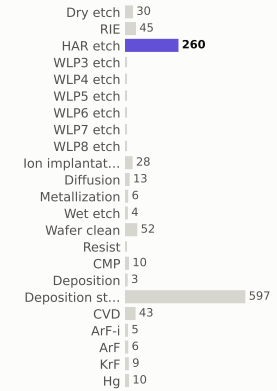

materials deposited (g)

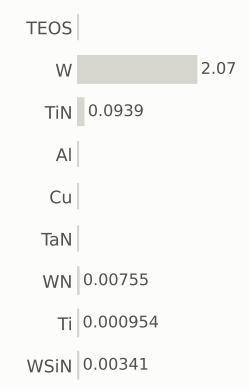

gases emitted (g)

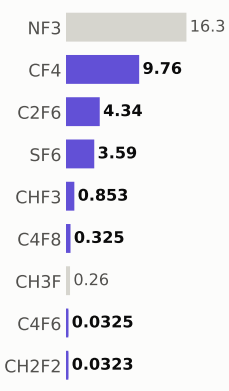

Step #14734.7651: HAR_etch

etch_noop · HAR_etch

1.04	1,537.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

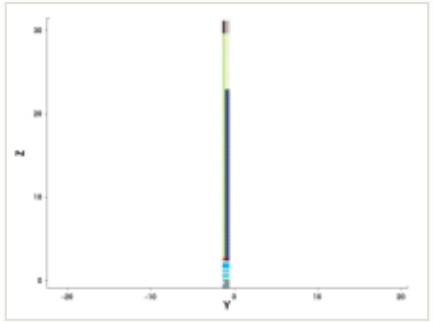

y cut at -1.035 µm

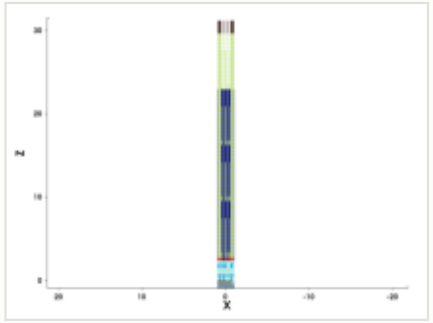

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

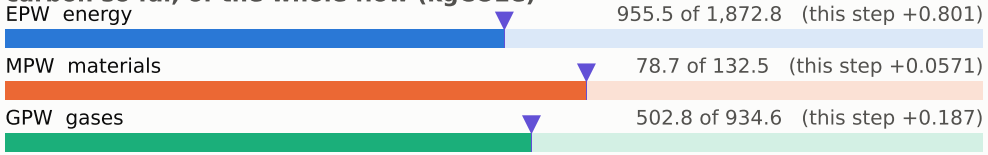

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

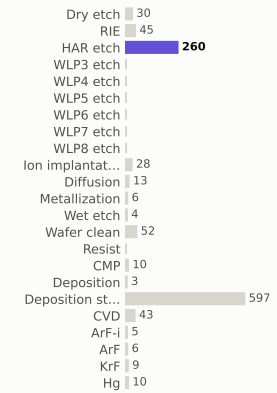

materials deposited (g)

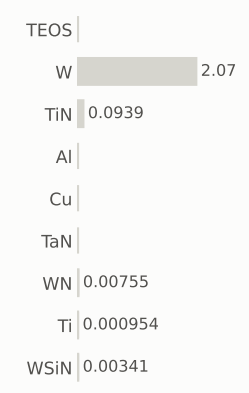

gases emitted (g)

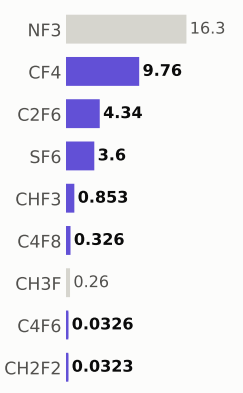

Step #14734.8322: HAR_etch

etch_noop · HAR_etch

1.04	1,538.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

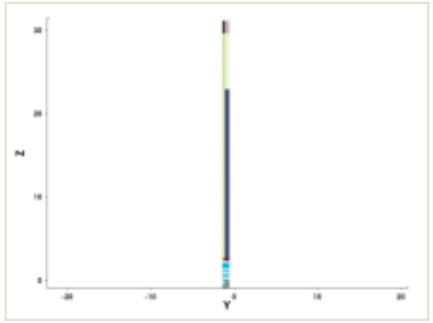

y cut at -1.035 µm

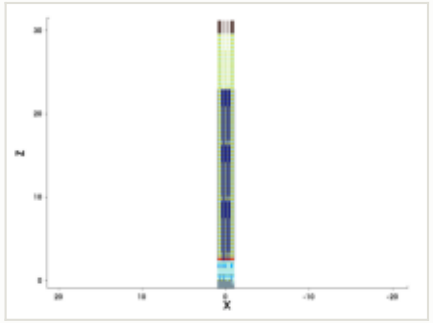

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

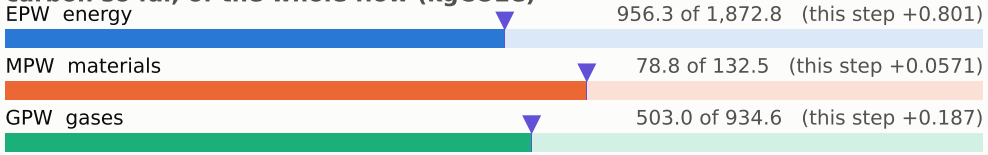

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

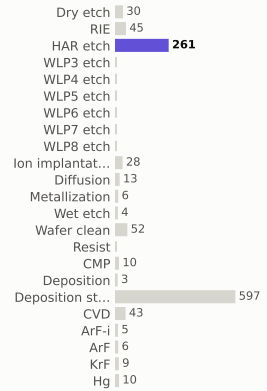

materials deposited (g)

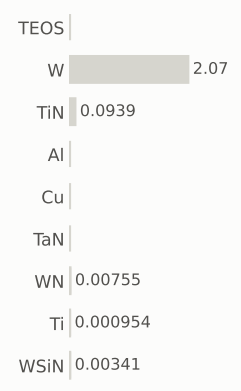

gases emitted (g)

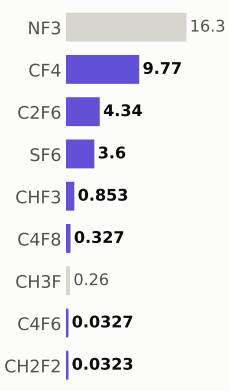

Step #14734.8993: HAR_etch

etch_noop · HAR_etch

1.04	1,539.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

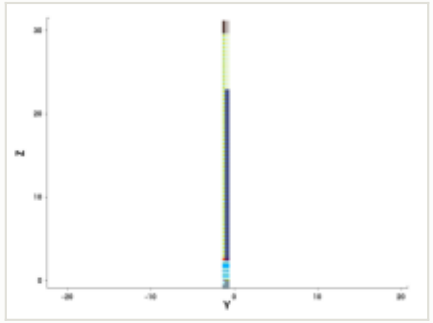

y cut at -1.035 µm

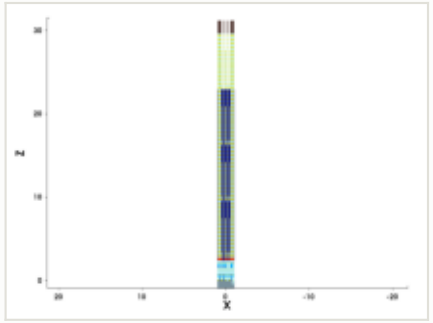

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

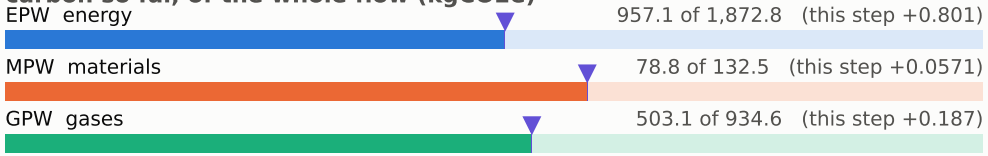

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

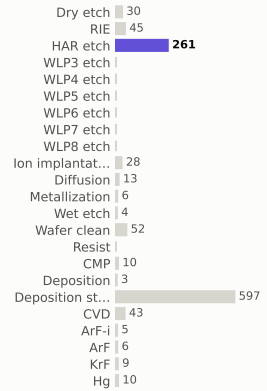

materials deposited (g)

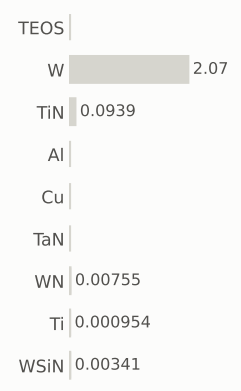

gases emitted (g)

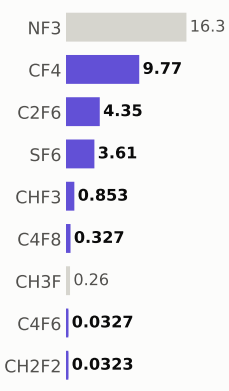

Step #14734.9664: HAR_etch

etch_noop · HAR_etch

1.04	1,540.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

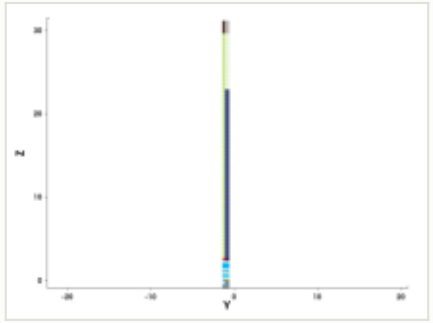

y cut at -1.035 µm

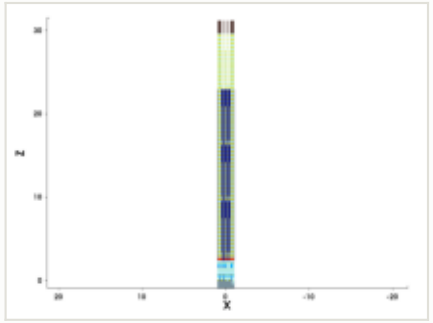

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

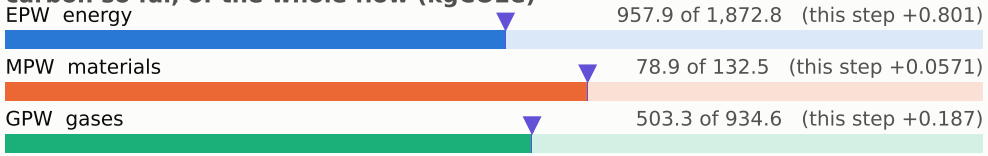

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

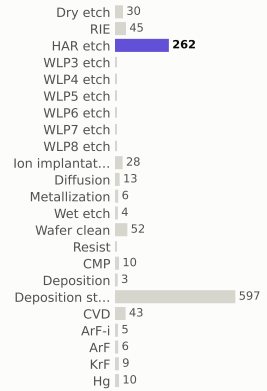

materials deposited (g)

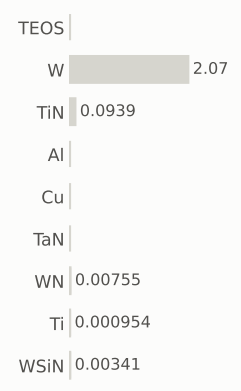

gases emitted (g)

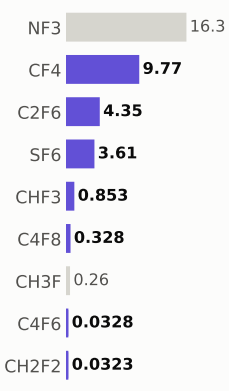

Step #14735.0336: HAR_etch

etch_noop · HAR_etch

1.04	1,541.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

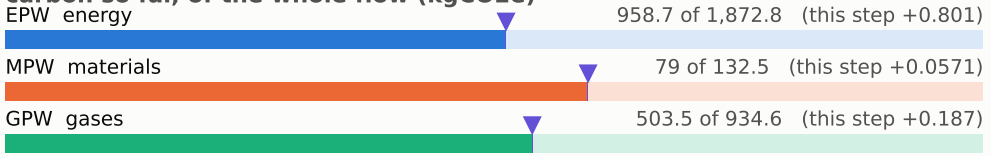

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

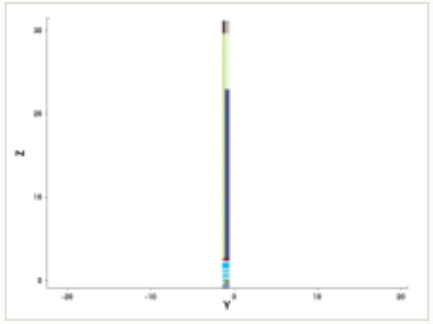

y cut at -1.035 µm

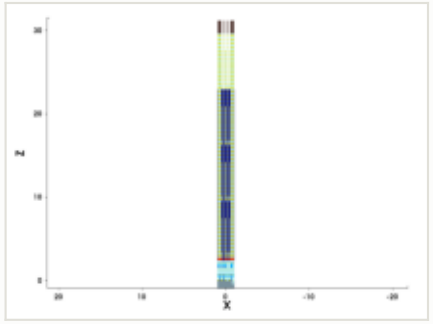

mask for this step

no mask for this step

steps by process area

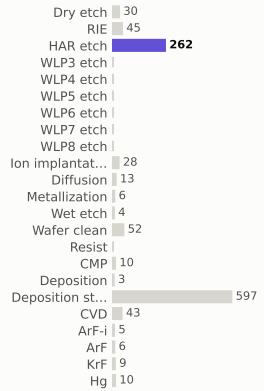

materials deposited (g)

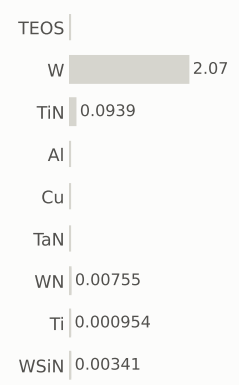

gases emitted (g)

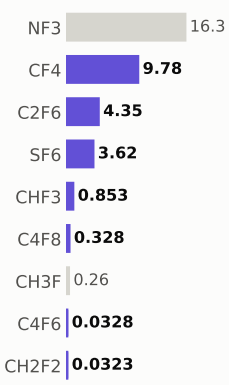

Step #14735.1007: HAR_etch

etch_noop · HAR_etch

1.04	1,542.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

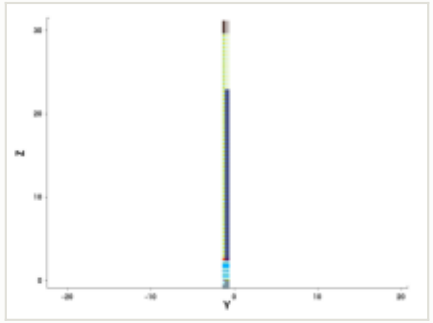

y cut at -1.035 µm

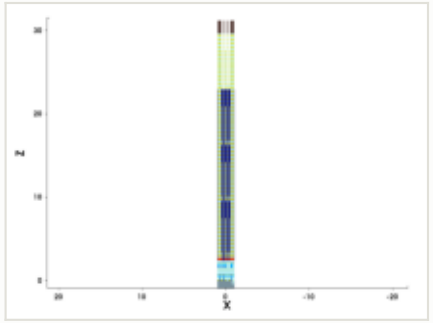

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

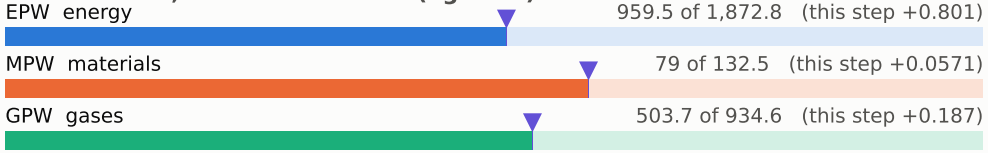

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

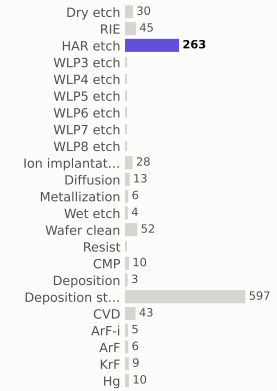

materials deposited (g)

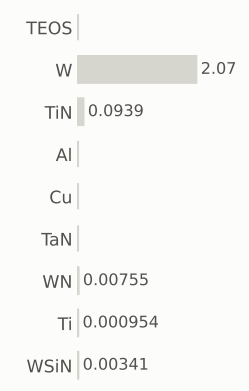

gases emitted (g)

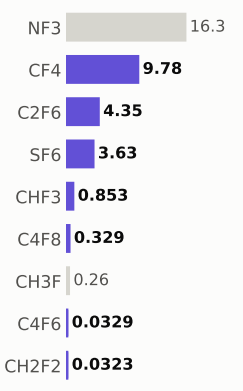

Step #14735.1678: HAR_etch

etch_noop · HAR_etch

1.04	1,543.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

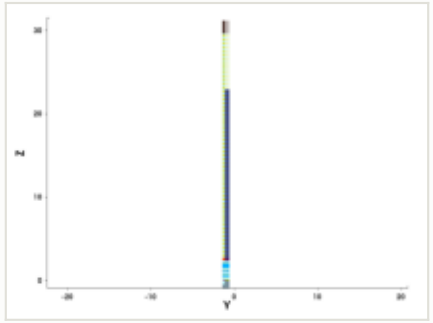

y cut at -1.035 µm

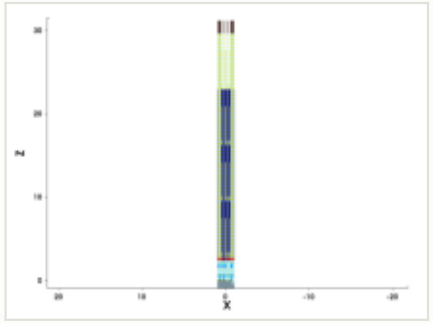

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

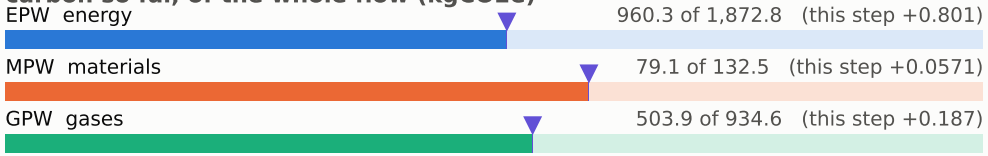

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

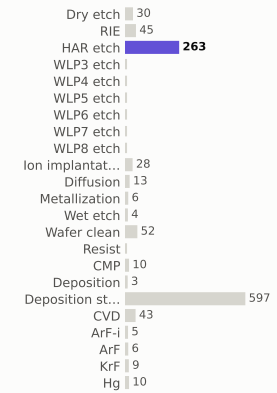

materials deposited (g)

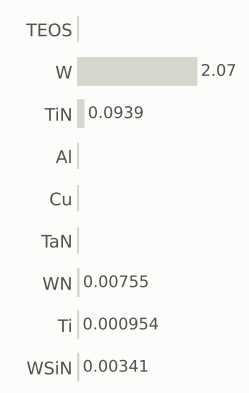

gases emitted (g)

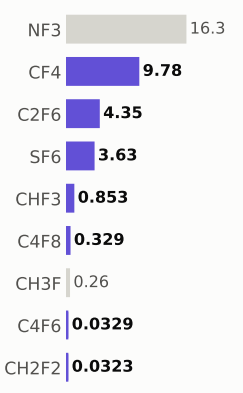

Step #14735.2349: HAR_etch

etch_noop · HAR_etch

1.04	1,544.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

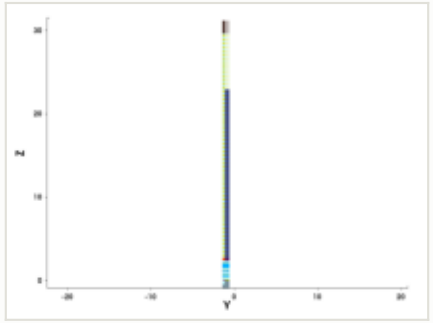

y cut at -1.035 µm

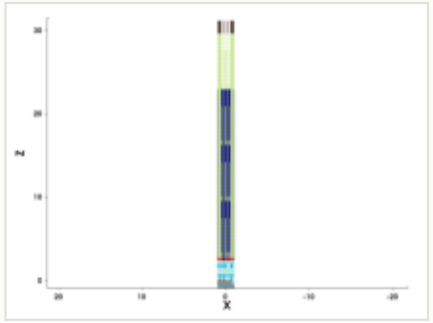

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

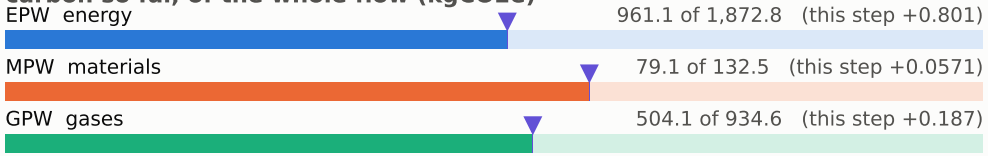

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

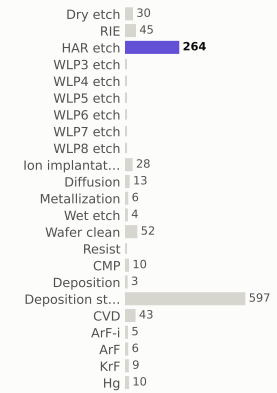

materials deposited (g)

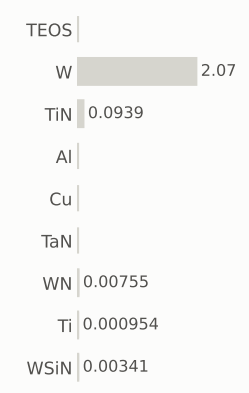

gases emitted (g)

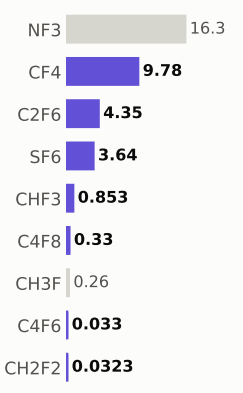

Step #14735.302: HAR_etch

etch_noop · HAR_etch

1.04	1,545.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

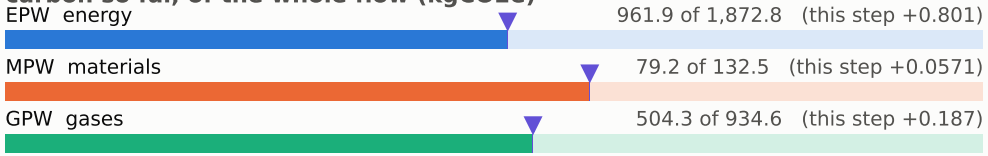

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

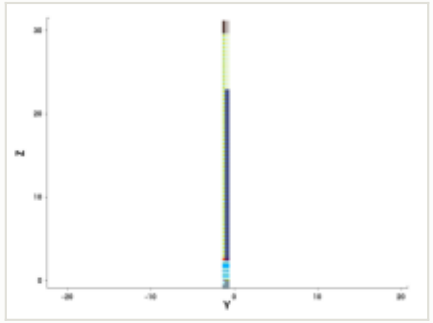

y cut at -1.035 µm

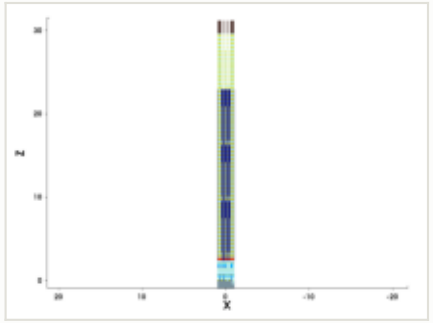

mask for this step

no mask for this step

steps by process area

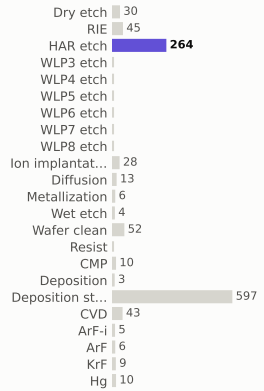

materials deposited (g)

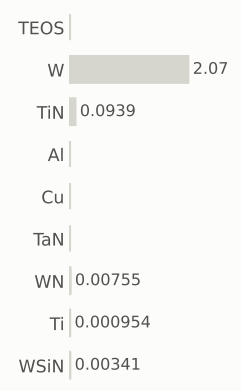

gases emitted (g)

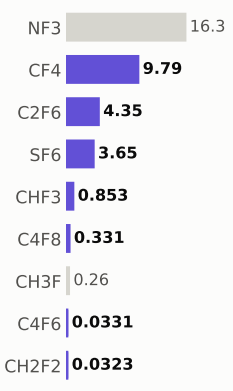

Step #14735.3691: HAR_etch

etch_noop · HAR_etch

1.04	1,546.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

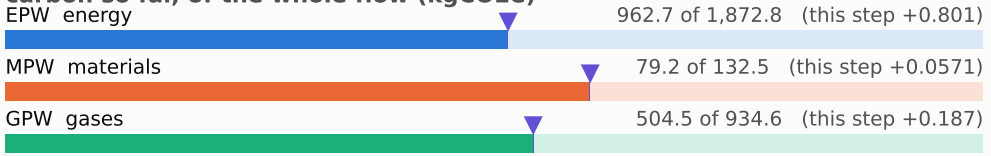

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

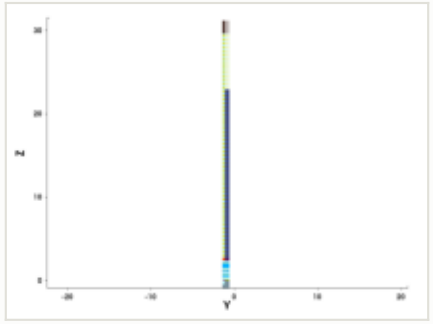

y cut at -1.035 µm

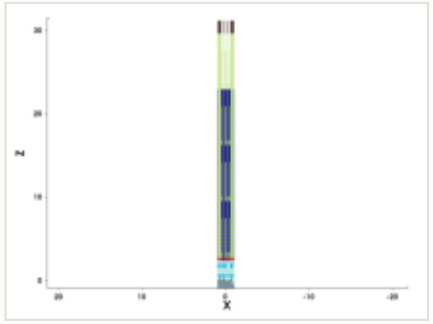

mask for this step

no mask for this step

steps by process area

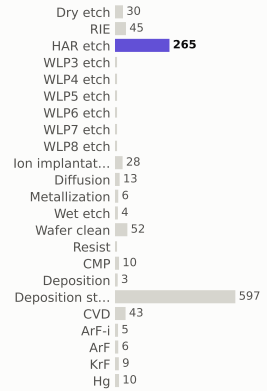

materials deposited (g)

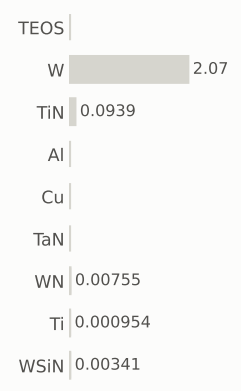

gases emitted (g)

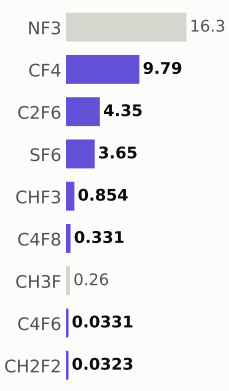

Step #14735.4362: HAR_etch

etch_noop · HAR_etch

1.04	1,547.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

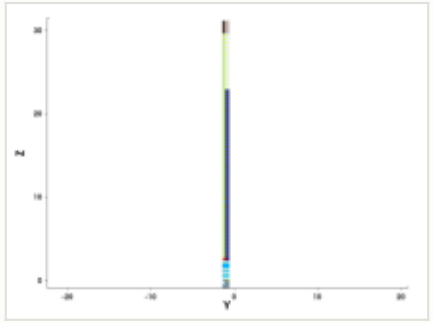

y cut at -1.035 µm

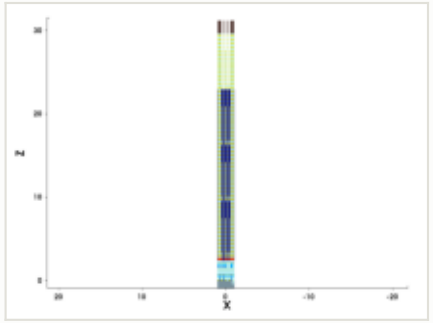

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

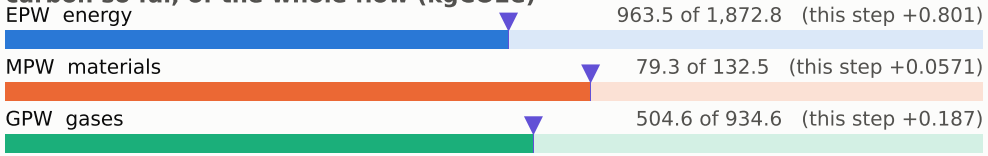

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

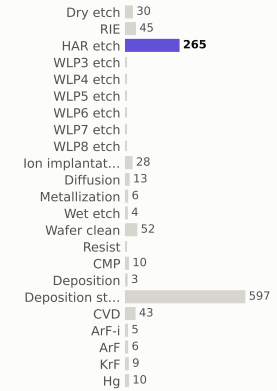

materials deposited (g)

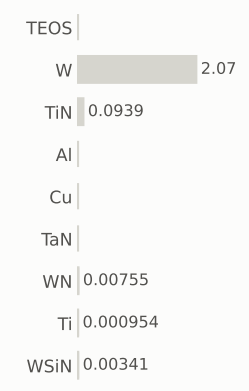

gases emitted (g)

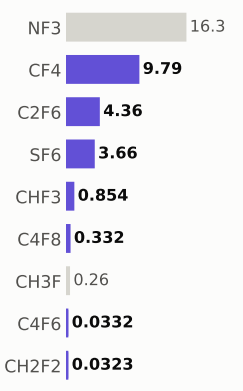

Step #14735.5034: HAR_etch

etch_noop · HAR_etch

1.04	1,548.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

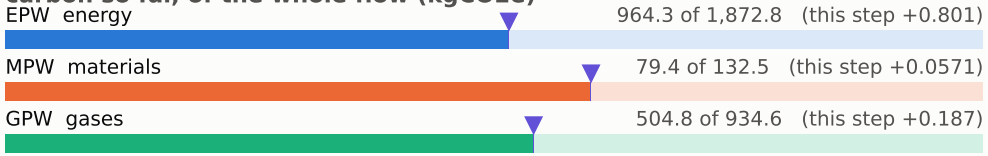

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

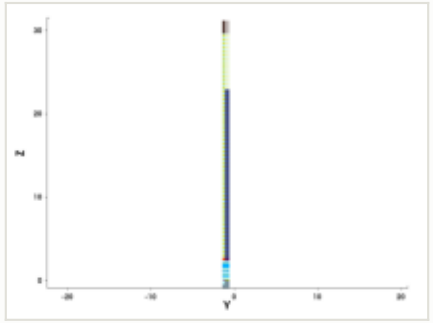

y cut at -1.035 µm

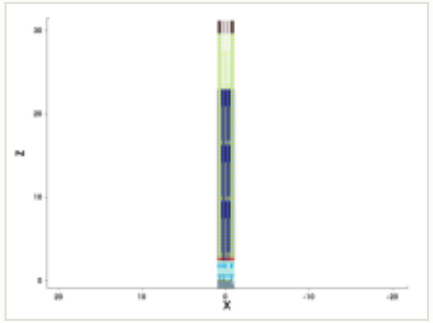

mask for this step

no mask for this step

steps by process area

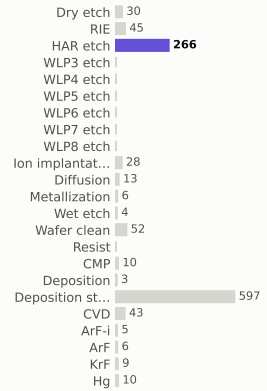

materials deposited (g)

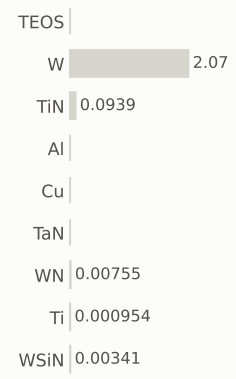

gases emitted (g)

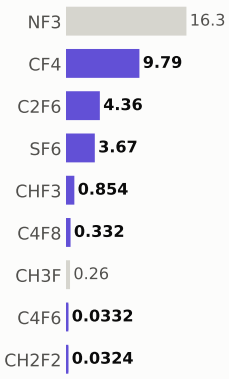

Step #14735.5705: HAR_etch

etch_noop · HAR_etch

1.04	1,549.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

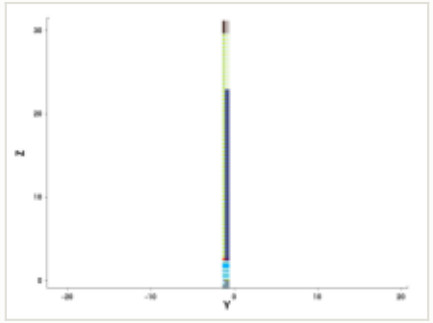

y cut at -1.035 µm

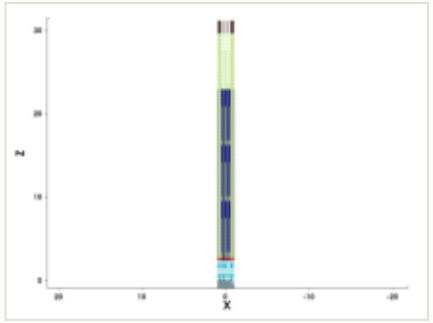

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

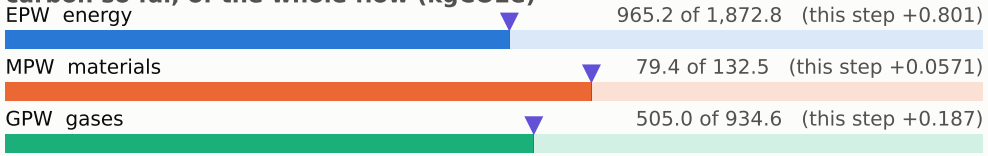

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

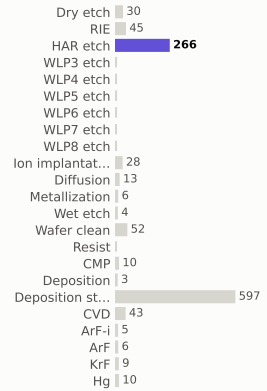

materials deposited (g)

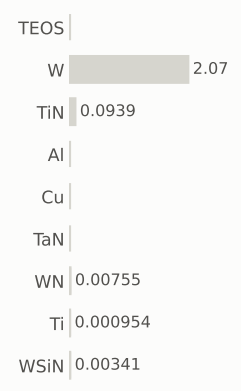

gases emitted (g)

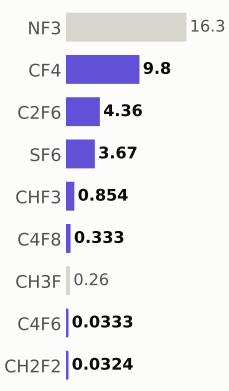

Step #14735.6376: HAR_etch

etch_noop · HAR_etch

1.04	1,550.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

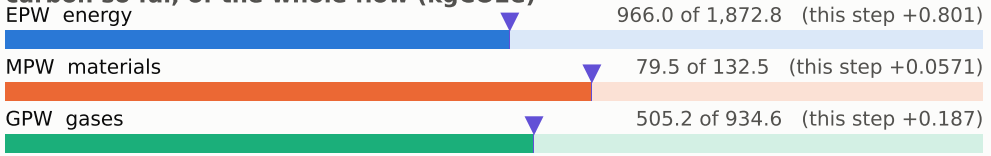

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

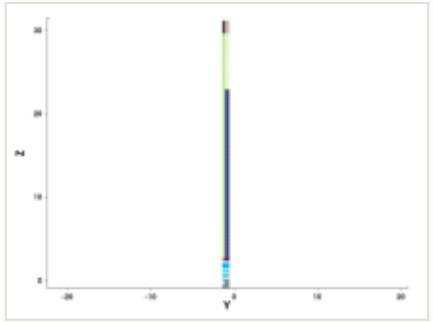

y cut at -1.035 µm

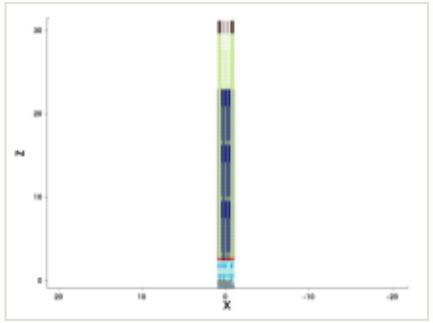

mask for this step

no mask for this step

steps by process area

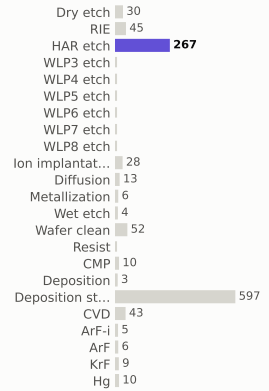

materials deposited (g)

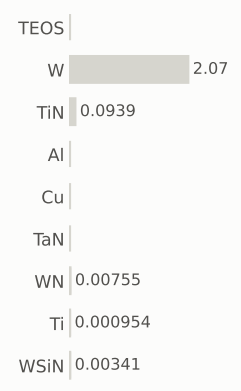

gases emitted (g)

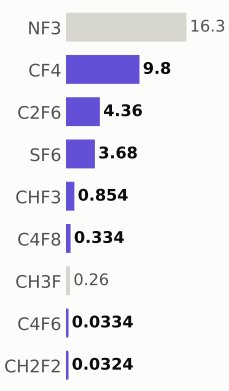

Step #14735.7047: HAR_etch

etch_noop · HAR_etch

1.04	1,551.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

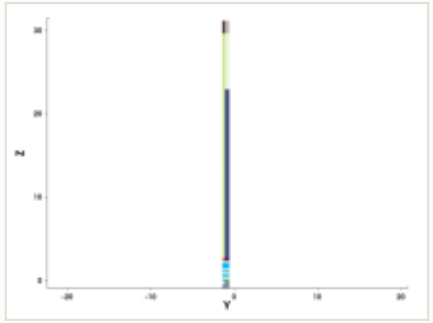

y cut at -1.035 µm

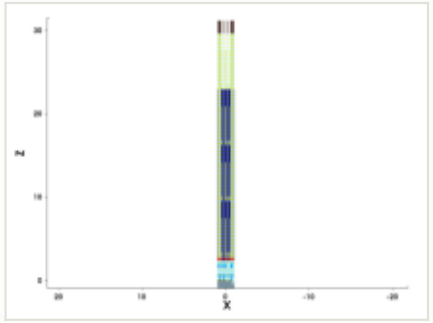

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

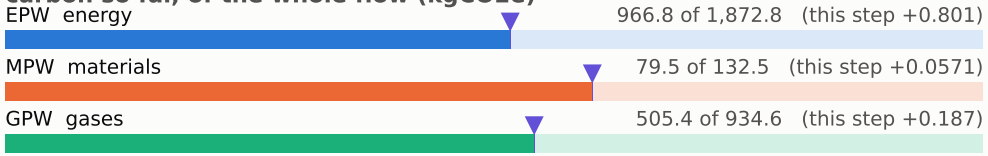

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

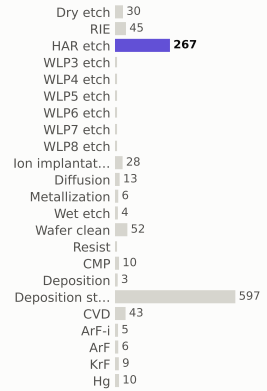

materials deposited (g)

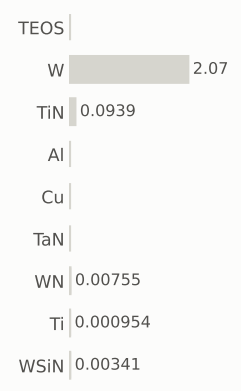

gases emitted (g)

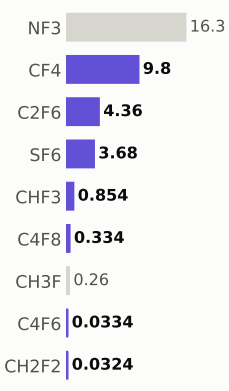

Step #14735.7718: HAR_etch

etch_noop · HAR_etch

1.04	1,552.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

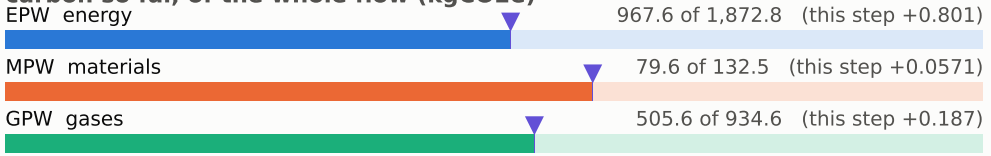

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

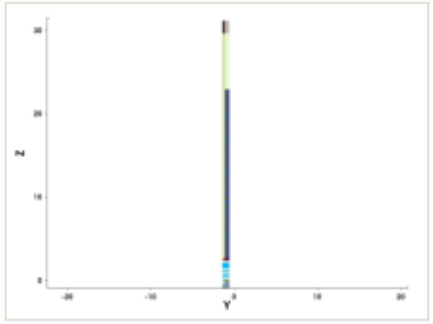

y cut at -1.035 µm

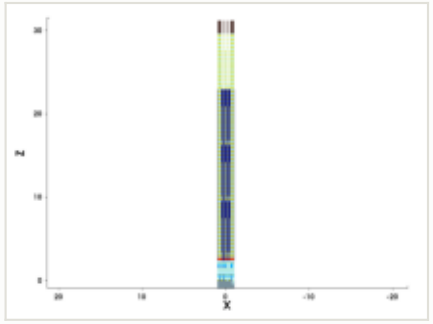

mask for this step

no mask for this step

steps by process area

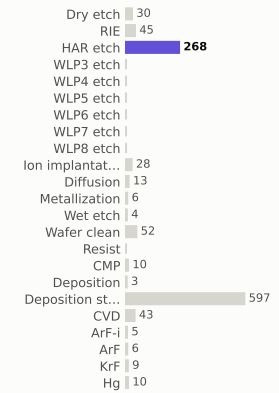

materials deposited (g)

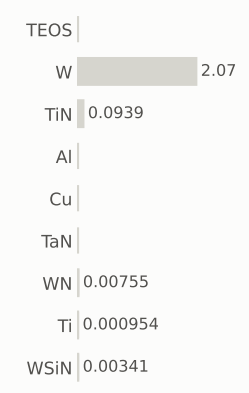

gases emitted (g)

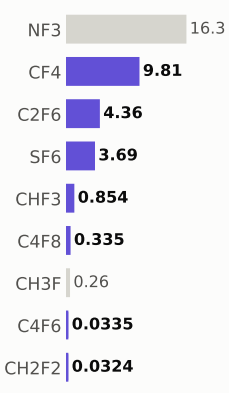

Step #14735.8389: HAR_etch

etch_noop · HAR_etch

1.04	1,553.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

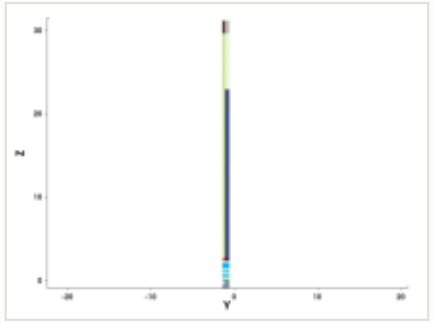

y cut at -1.035 µm

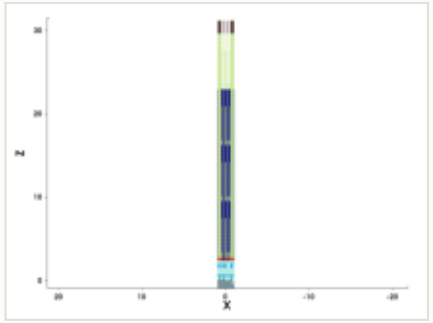

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

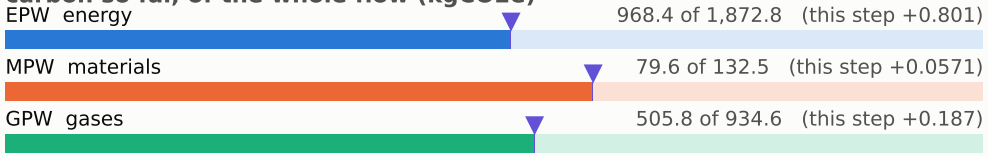

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

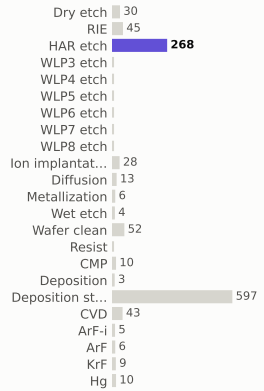

materials deposited (g)

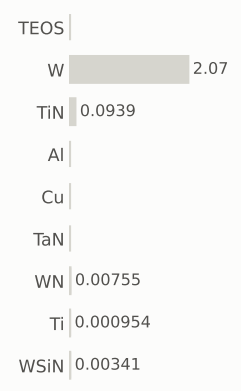

gases emitted (g)

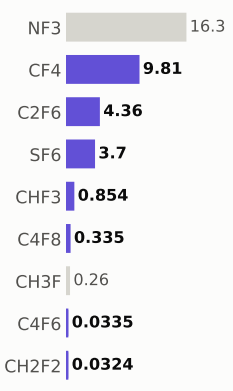

Step #14735.906: HAR_etch

etch_noop · HAR_etch

1.04	1,554.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

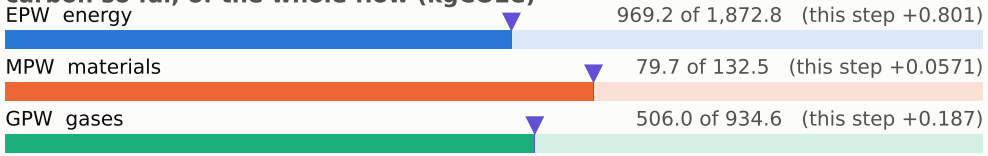

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

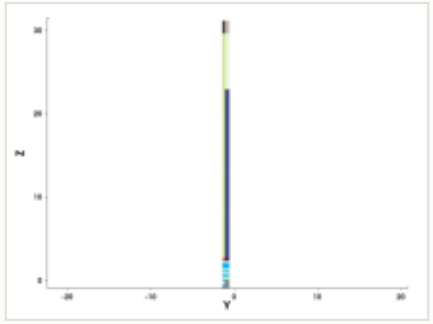

y cut at -1.035 µm

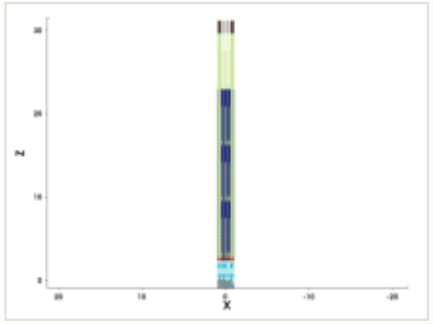

mask for this step

no mask for this step

steps by process area

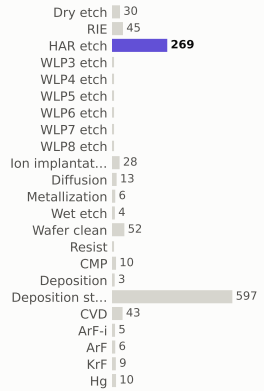

materials deposited (g)

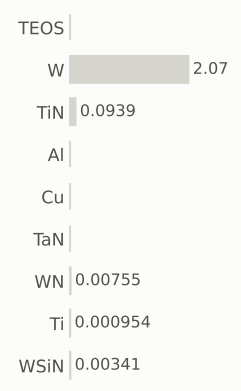

gases emitted (g)

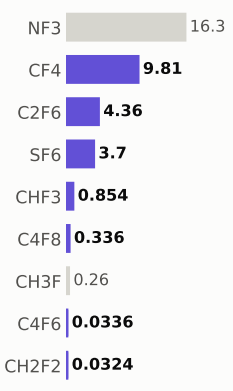

Step #14735.9732: HAR_etch

etch_noop · HAR_etch

1.04	1,555.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

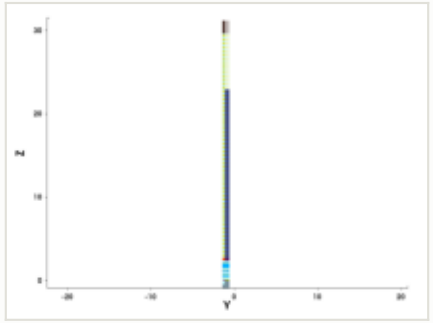

y cut at -1.035 µm

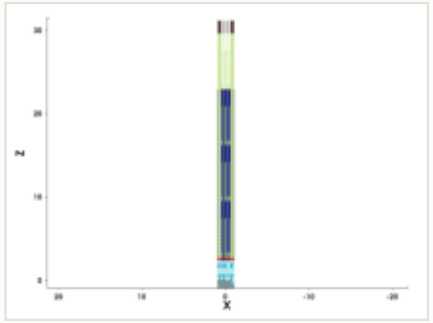

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

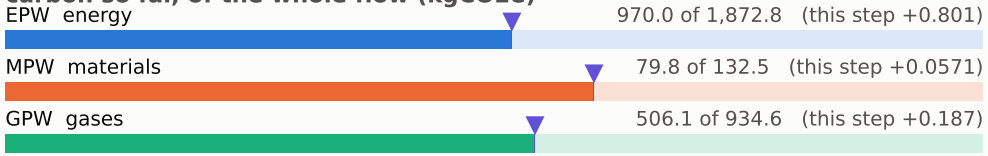

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

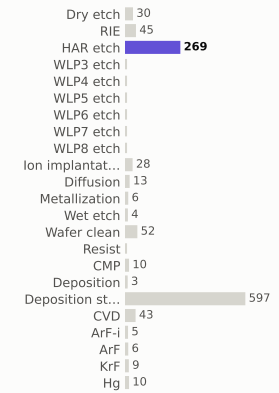

materials deposited (g)

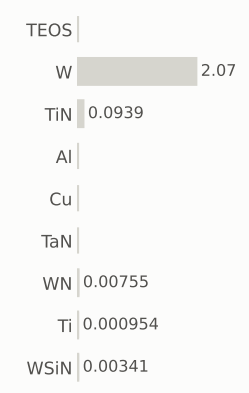

gases emitted (g)

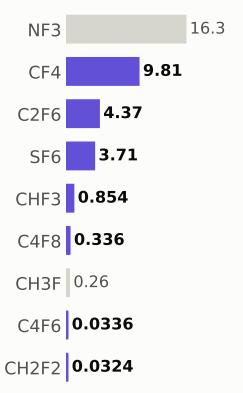

Step #14736.0403: HAR_etch

etch_noop · HAR_etch

1.04	1,556.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

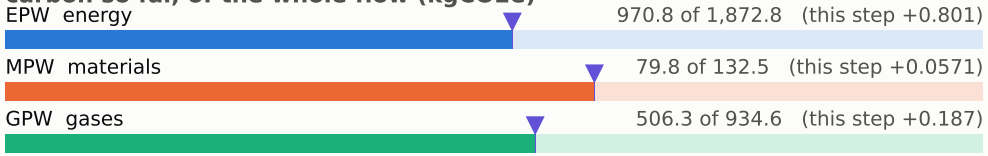

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

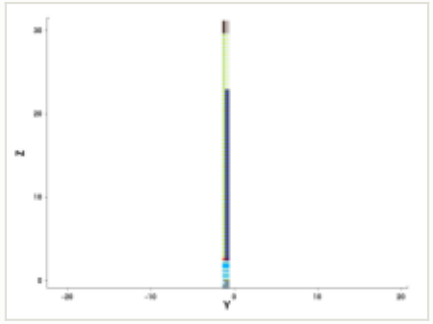

y cut at -1.035 µm

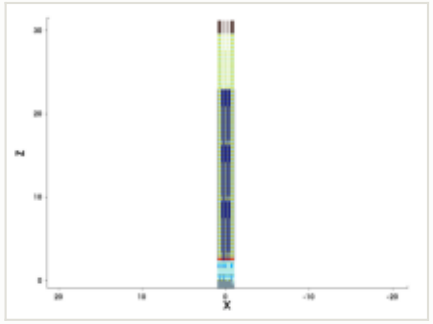

mask for this step

no mask for this step

steps by process area

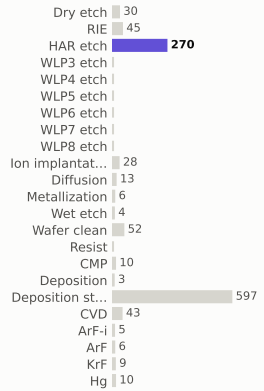

materials deposited (g)

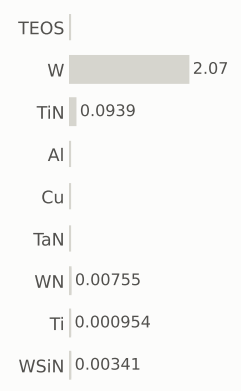

gases emitted (g)

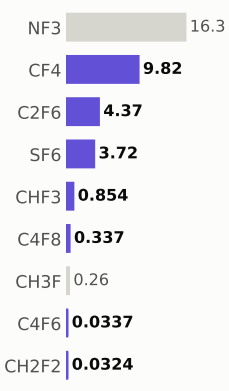

Step #14736.1074: HAR_etch

etch_noop · HAR_etch

1.04	1,557.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

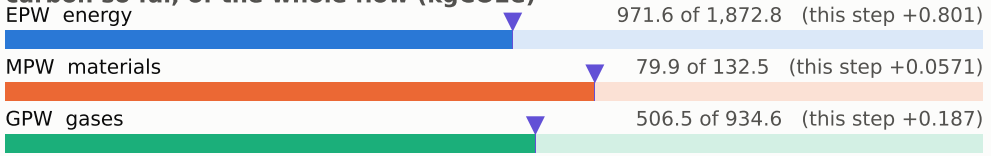

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

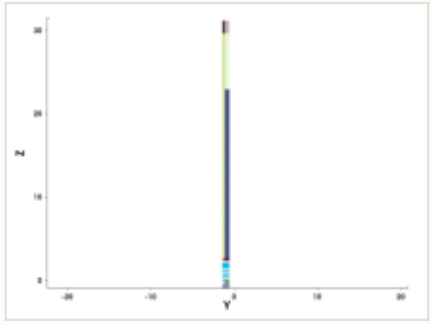

y cut at -1.035 µm

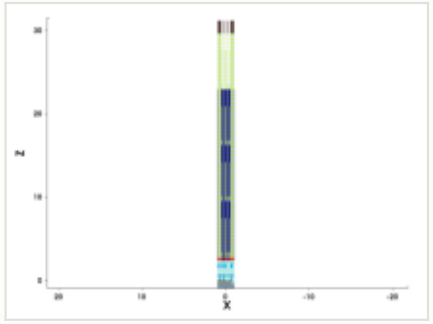

mask for this step

no mask for this step

steps by process area

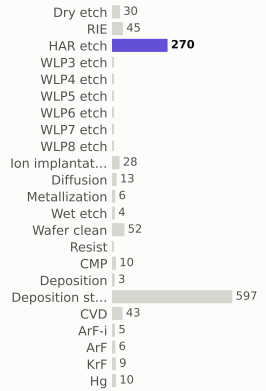

materials deposited (g)

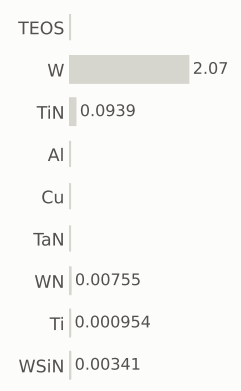

gases emitted (g)

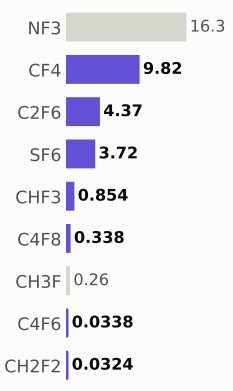

Step #14736.1745: HAR_etch

etch_noop · HAR_etch

1.04	1,559.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

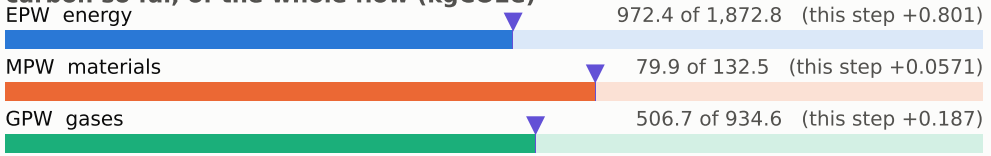

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

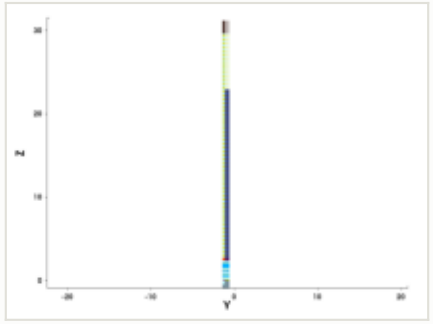

y cut at -1.035 µm

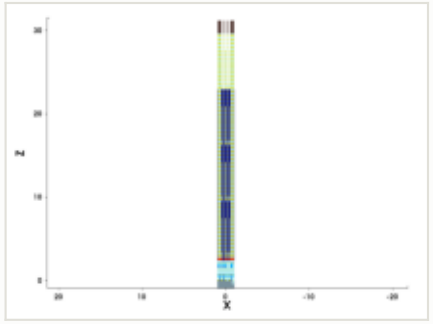

mask for this step

no mask for this step

steps by process area

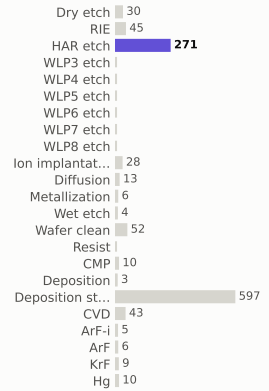

materials deposited (g)

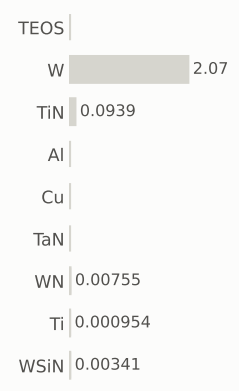

gases emitted (g)

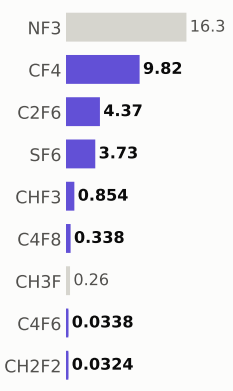

Step #14736.2416: HAR_etch

etch_noop · HAR_etch

1.04	1,560.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

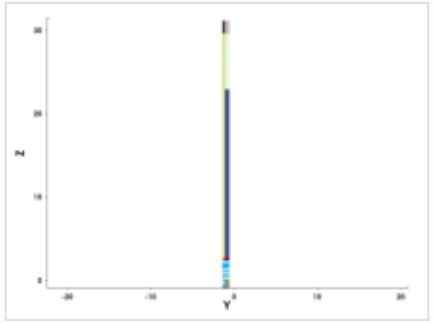

y cut at -1.035 µm

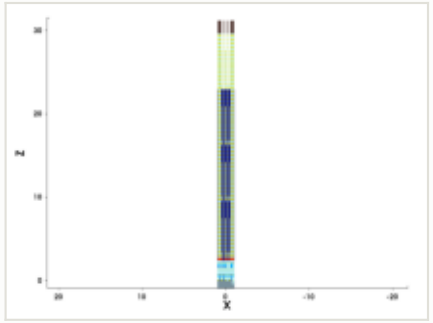

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

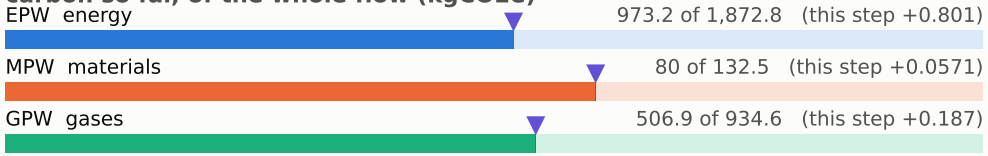

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

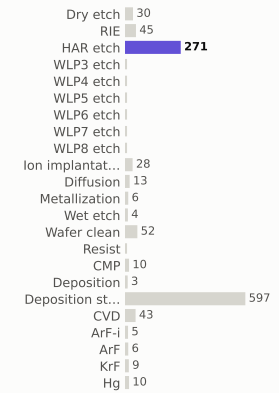

materials deposited (g)

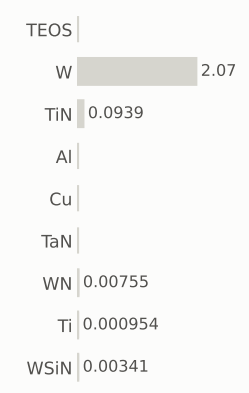

gases emitted (g)

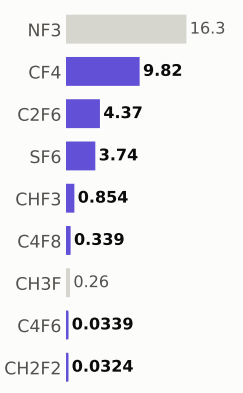

Step #14736.3087: HAR_etch

etch_noop · HAR_etch

1.04	1,561.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

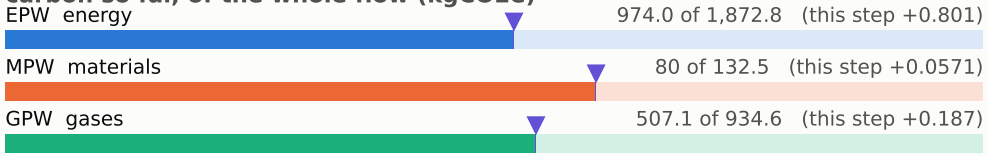

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

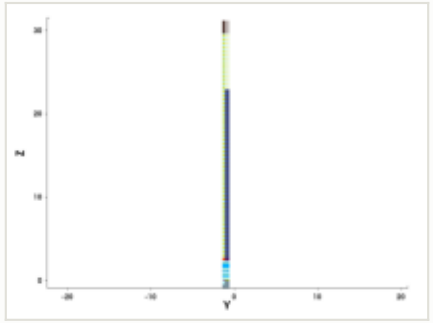

y cut at -1.035 µm

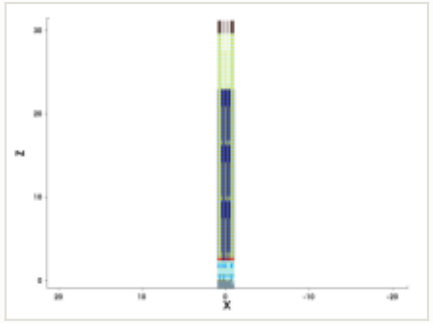

mask for this step

no mask for this step

steps by process area

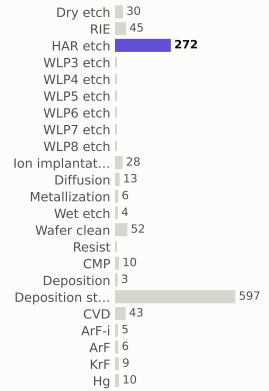

materials deposited (g)

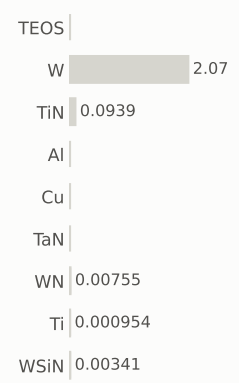

gases emitted (g)

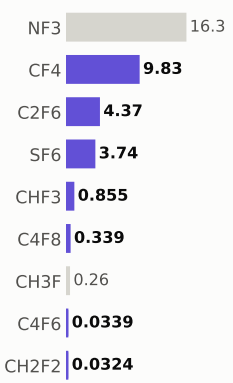

Step #14736.3758: HAR_etch

etch_noop · HAR_etch

1.04	1,562.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

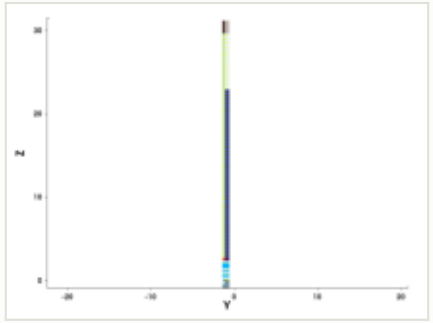

y cut at -1.035 µm

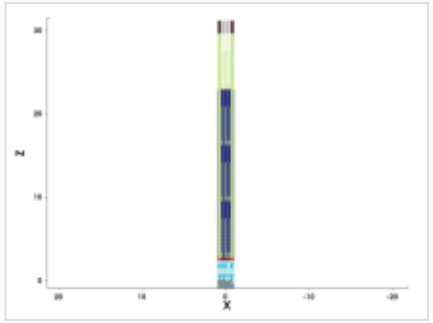

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

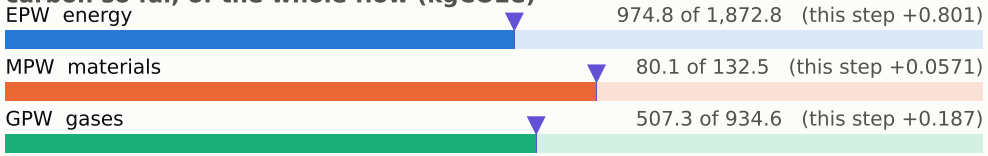

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

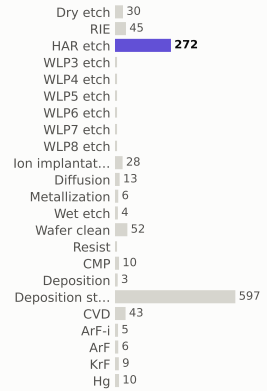

materials deposited (g)

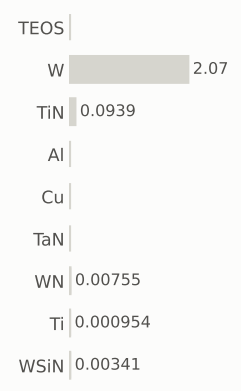

gases emitted (g)

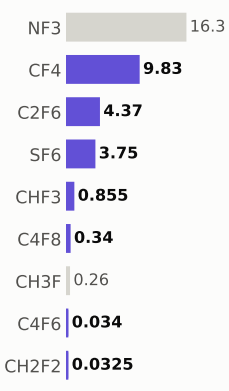

Step #14736.443: HAR_etch

etch_noop · HAR_etch

1.04	1,563.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

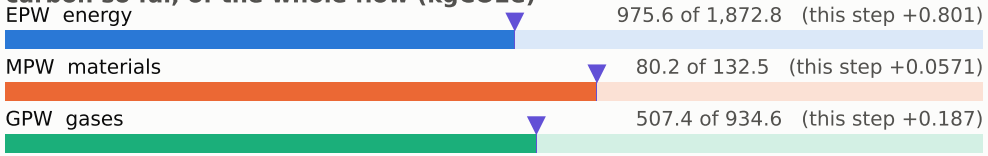

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

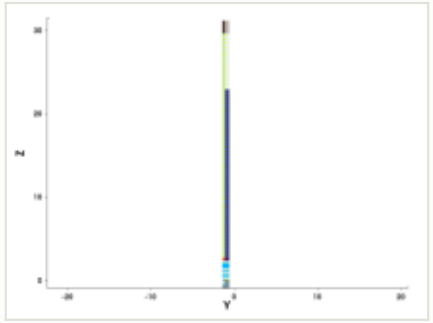

y cut at -1.035 µm

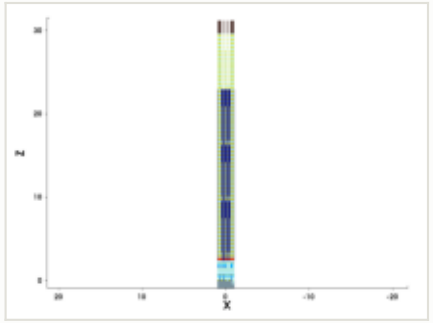

mask for this step

no mask for this step

steps by process area

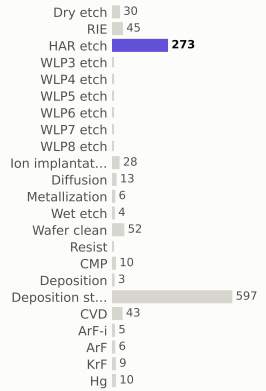

materials deposited (g)

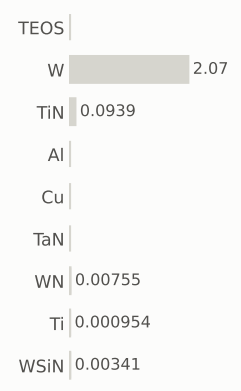

gases emitted (g)

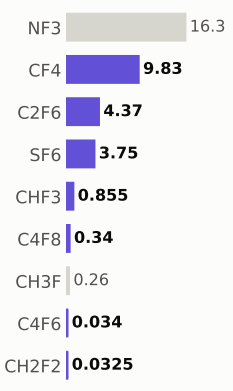

Step #14736.5101: HAR_etch

etch_noop · HAR_etch

1.04	1,564.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

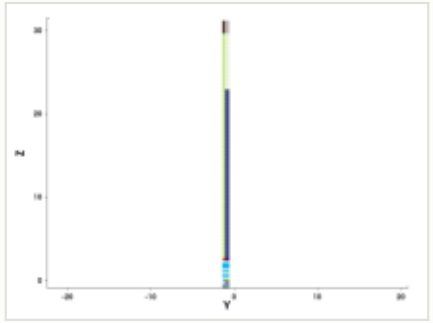

y cut at -1.035 µm

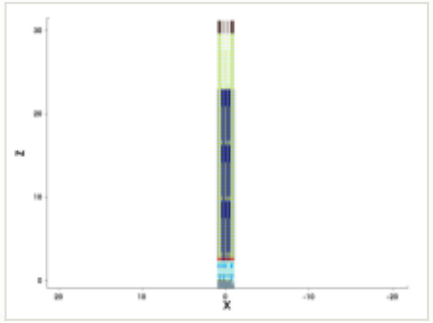

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

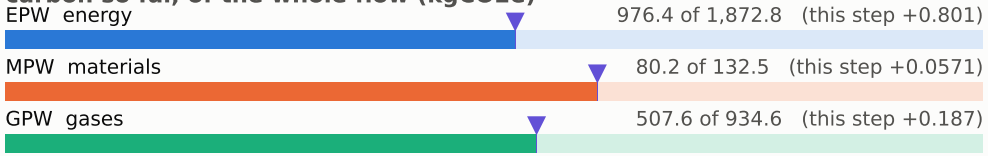

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

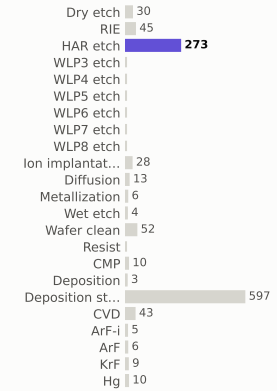

materials deposited (g)

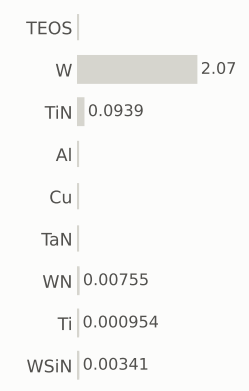

gases emitted (g)

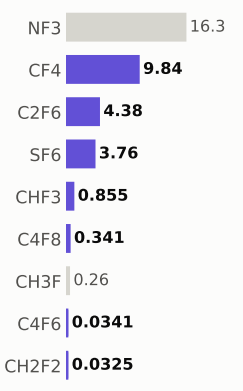

Step #14736.5772: HAR_etch

etch_noop · HAR_etch

1.04	1,565.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

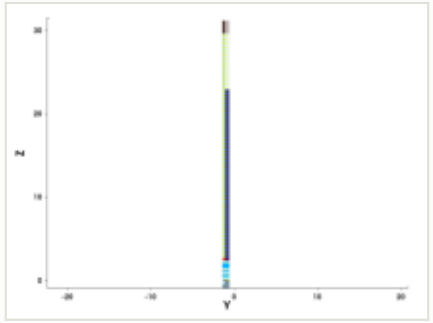

y cut at -1.035 µm

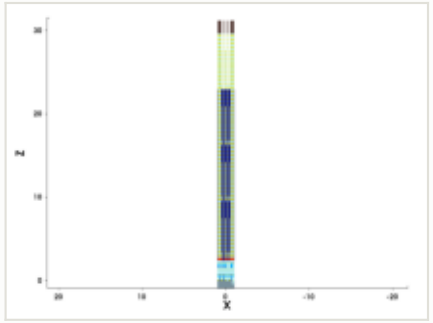

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

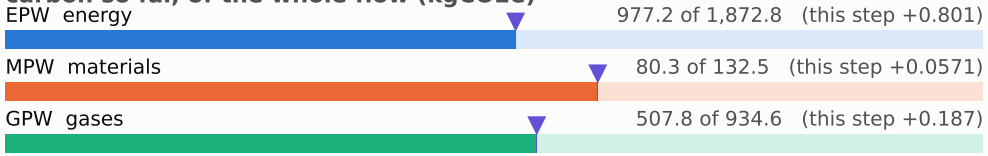

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

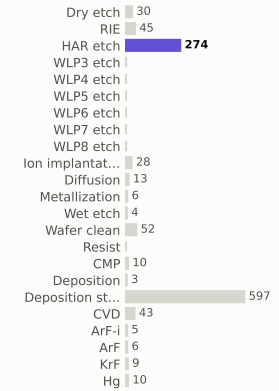

materials deposited (g)

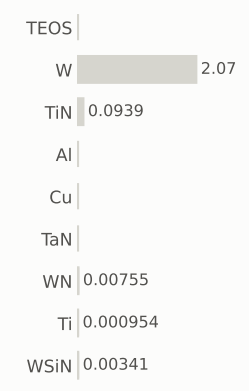

gases emitted (g)

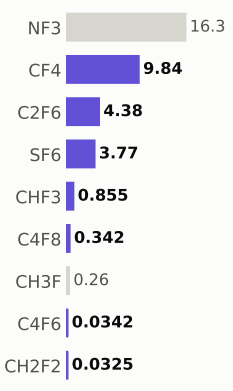

Step #14736.6443: HAR_etch

etch_noop · HAR_etch

1.04	1,566.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

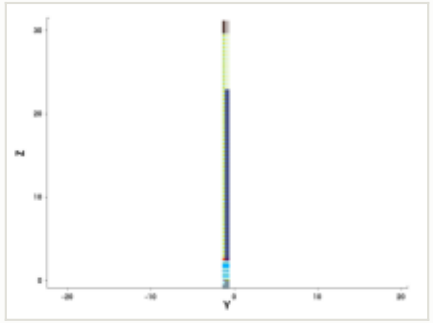

y cut at -1.035 µm

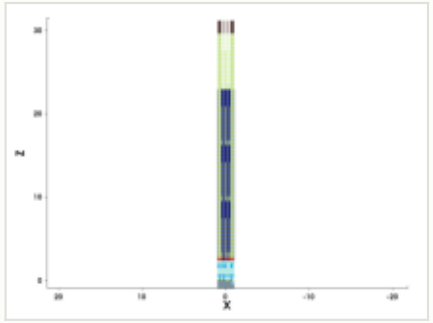

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

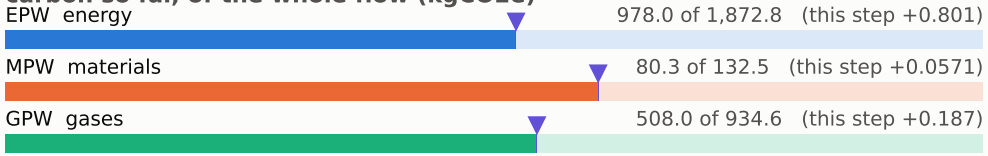

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

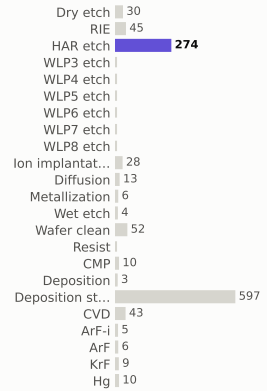

materials deposited (g)

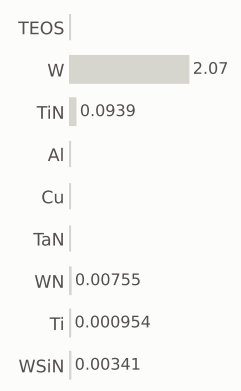

gases emitted (g)

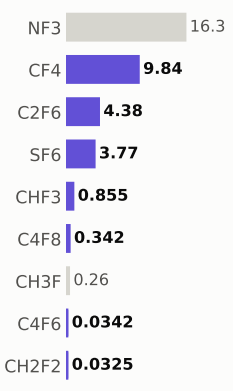

Step #14736.7114: HAR_etch

etch_noop · HAR_etch

1.04	1,567.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

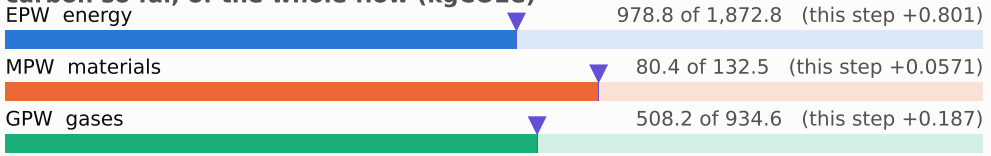

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

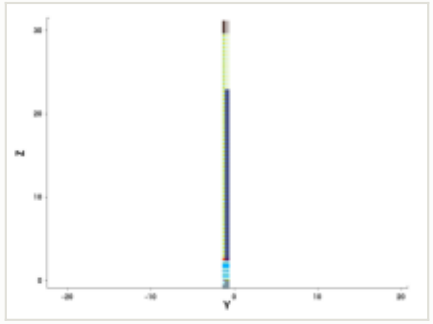

y cut at -1.035 µm

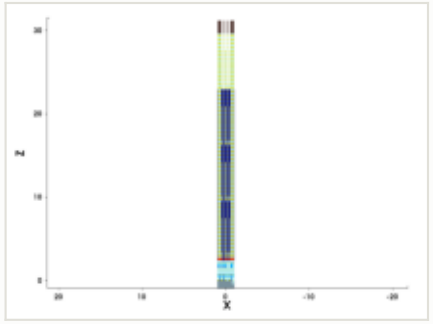

mask for this step

no mask for this step

steps by process area

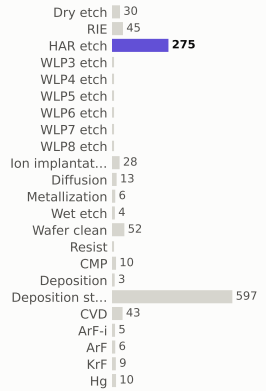

materials deposited (g)

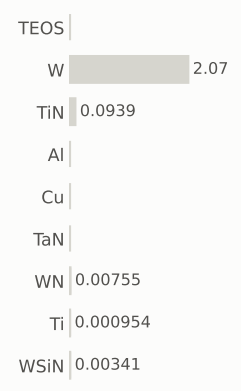

gases emitted (g)

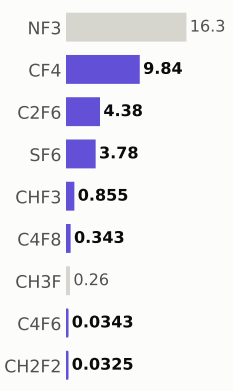

Step #14736.7785: HAR_etch

etch_noop · HAR_etch

1.04	1,568.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

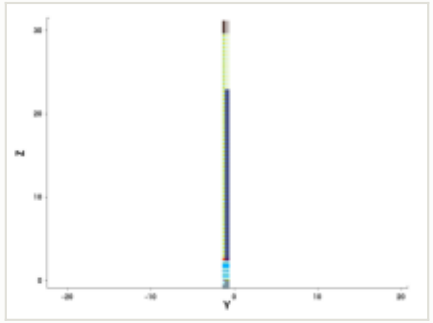

y cut at -1.035 µm

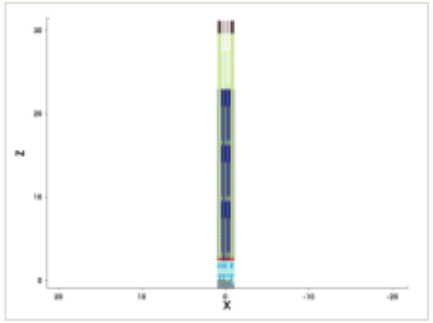

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

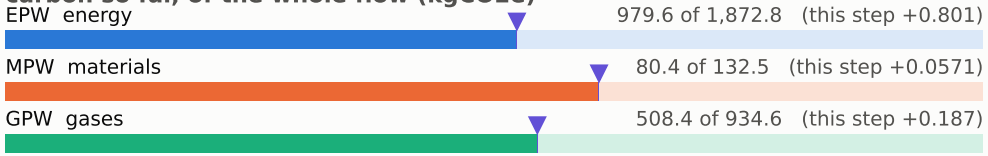

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

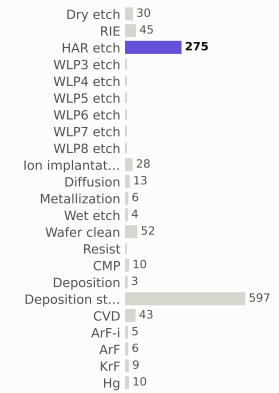

materials deposited (g)



gases emitted (g)

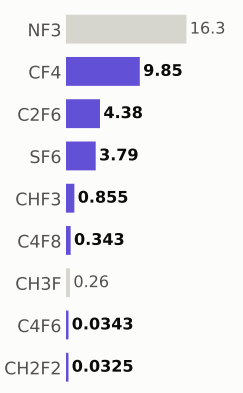

Step #14736.8456: HAR_etch

etch_noop · HAR_etch

1.04	1,569.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

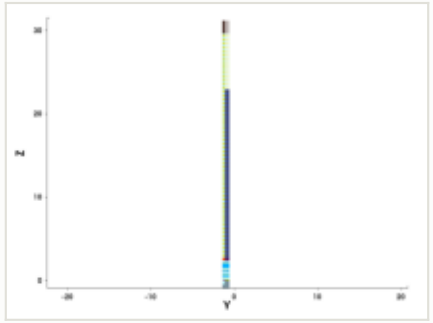

y cut at -1.035 µm

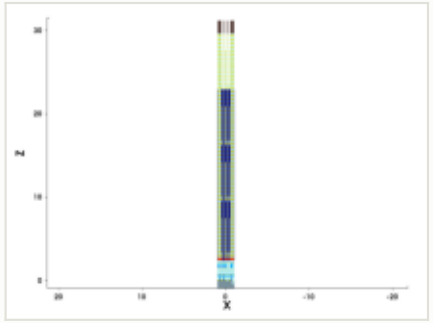

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

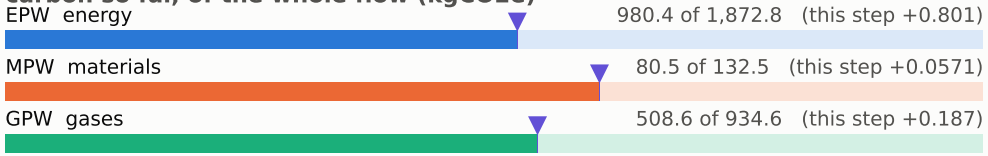

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

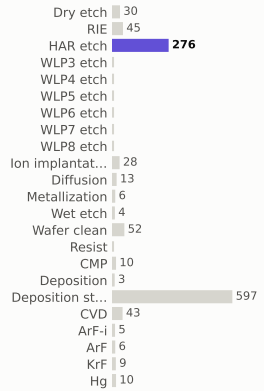

materials deposited (g)

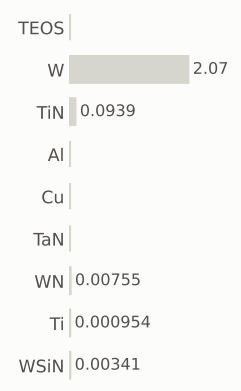

gases emitted (g)

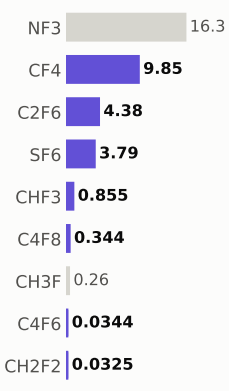

Step #14736.9128: HAR_etch

etch_noop · HAR_etch

1.04	1,570.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

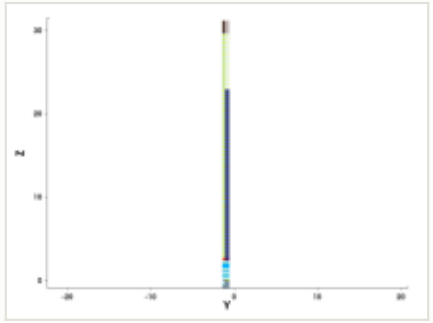

y cut at -1.035 µm

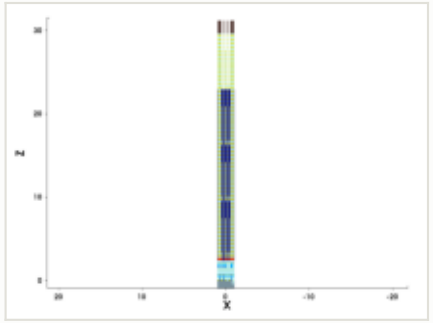

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

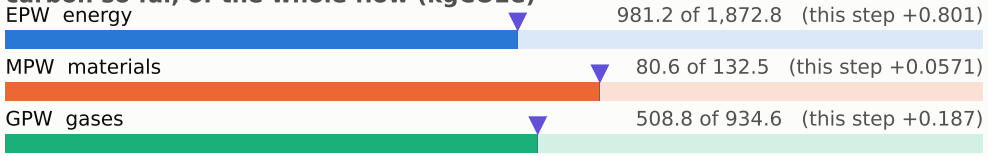

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

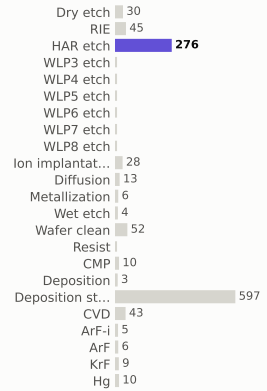

materials deposited (g)

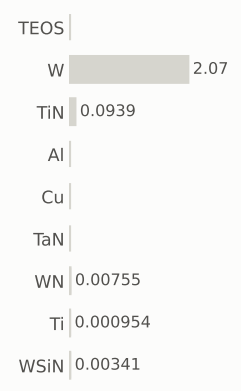

gases emitted (g)

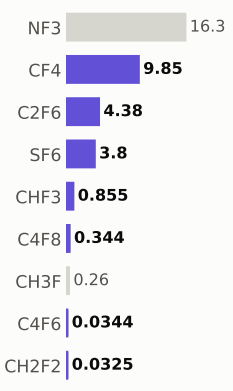

Step #14736.9799: HAR_etch

etch_noop · HAR_etch

1.04	1,571.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

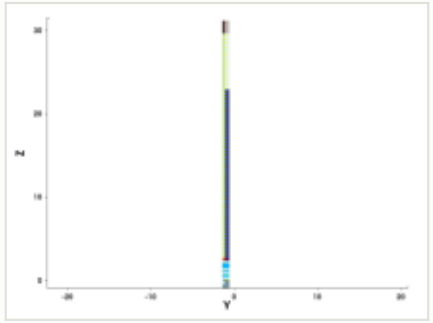

y cut at -1.035 µm

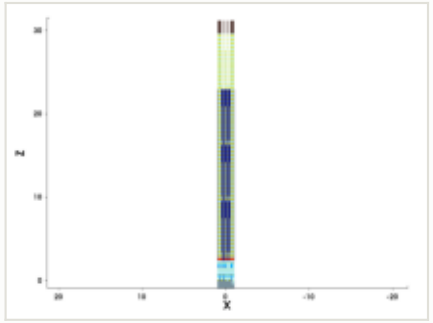

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

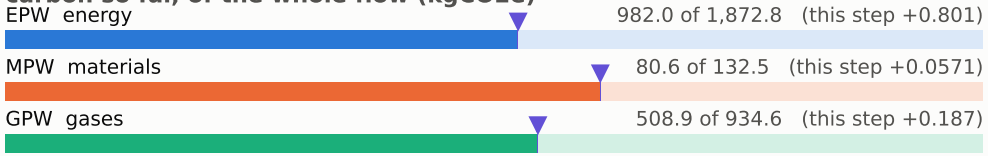

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

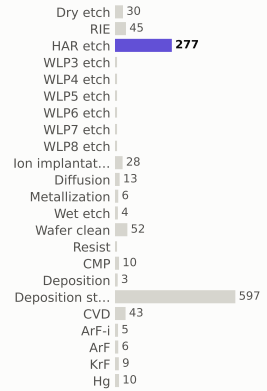

materials deposited (g)

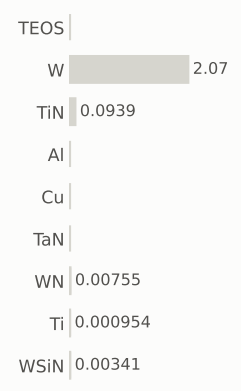

gases emitted (g)

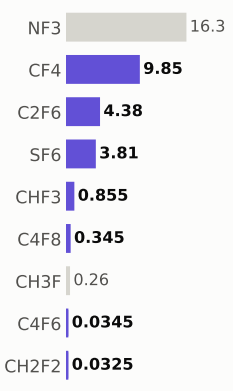

Step #14737.047: HAR_etch

etch_noop · HAR_etch

1.04	1,572.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

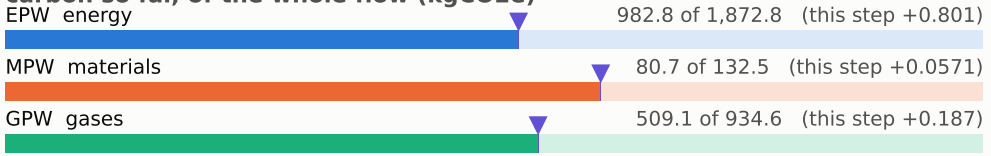

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

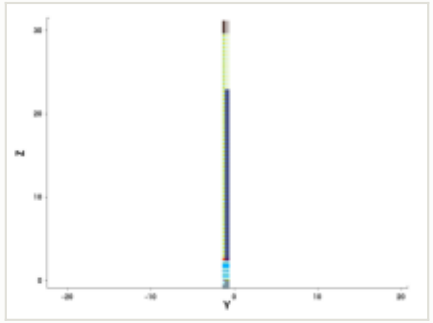

y cut at -1.035 µm

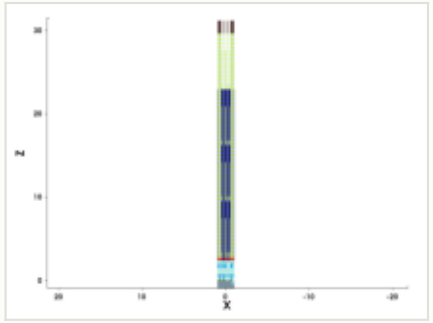

mask for this step

no mask for this step

steps by process area

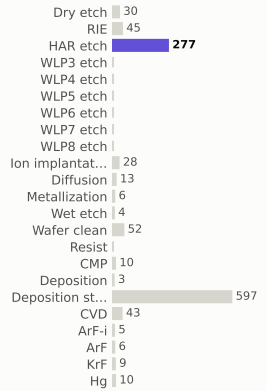

materials deposited (g)

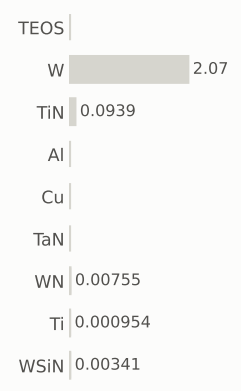

gases emitted (g)

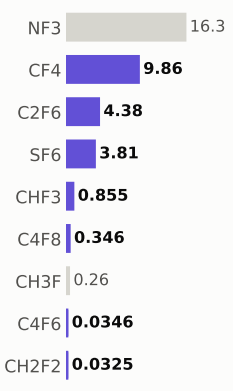

Step #14737.1141: HAR_etch

etch_noop · HAR_etch

1.04	1,573.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

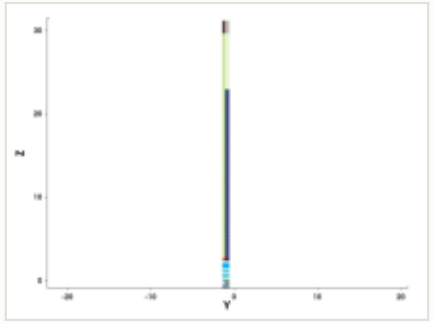

y cut at -1.035 µm

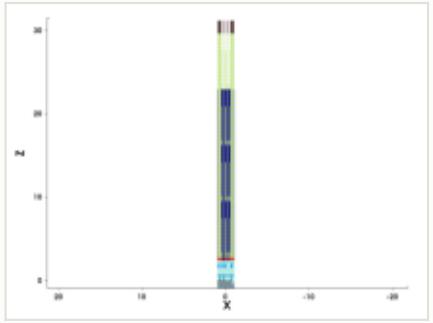

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

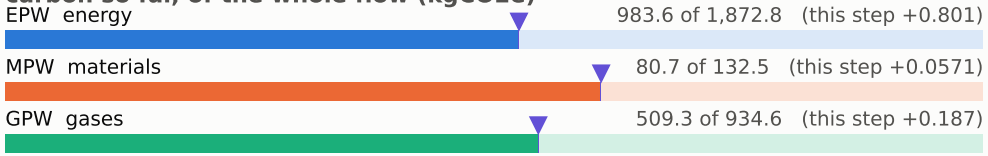

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

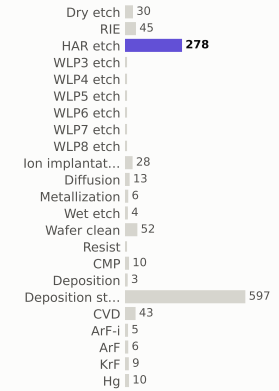

materials deposited (g)

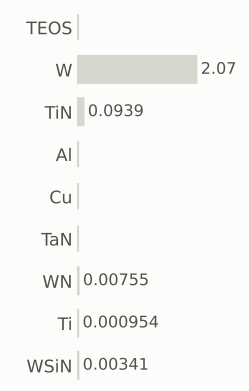

gases emitted (g)

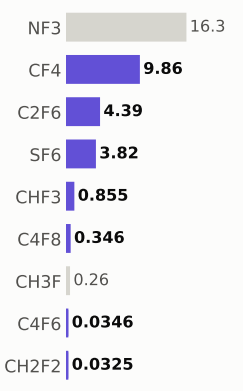

Step #14737.1812: HAR_etch

etch_noop · HAR_etch

1.04	1,574.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

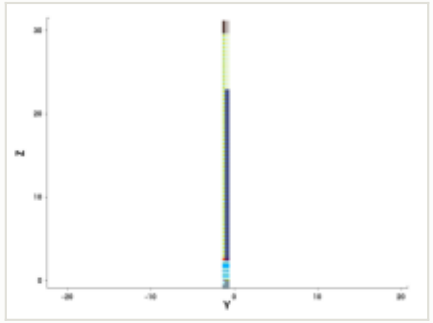

y cut at -1.035 µm

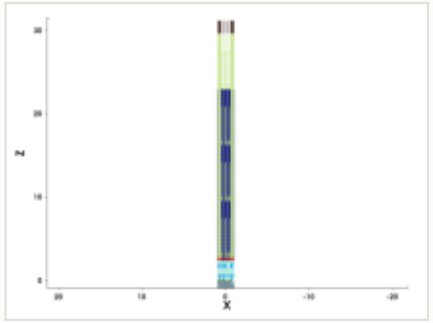

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

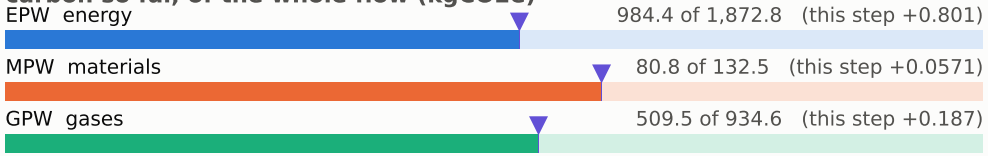

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

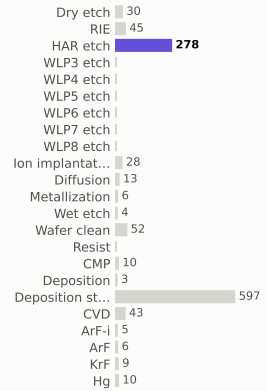

materials deposited (g)

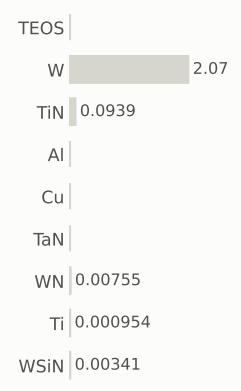

gases emitted (g)

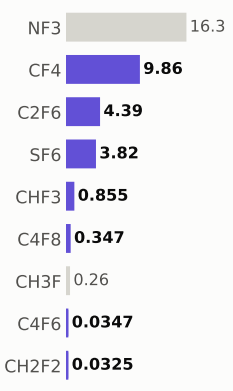

Step #14737.2483: HAR_etch

etch_noop · HAR_etch

1.04	1,575.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

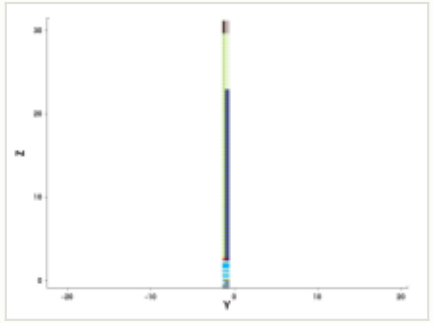

y cut at -1.035 µm

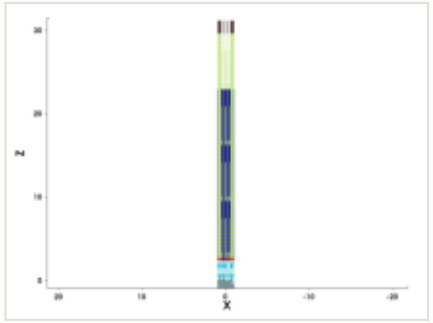

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

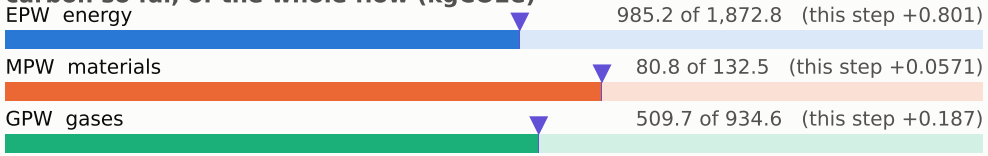

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

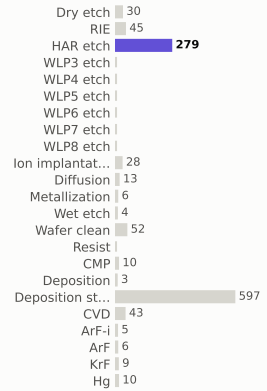

materials deposited (g)

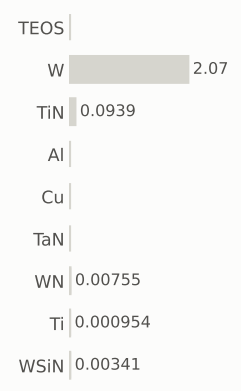

gases emitted (g)

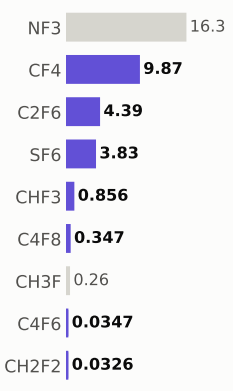

Step #14737.3154: HAR_etch

etch_noop · HAR_etch

1.04	1,576.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

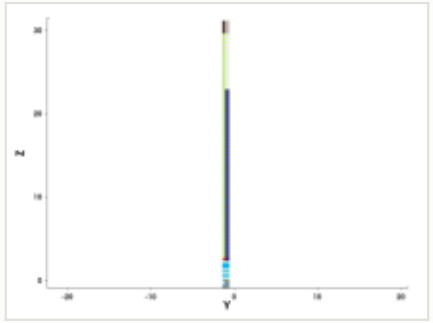

y cut at -1.035 µm

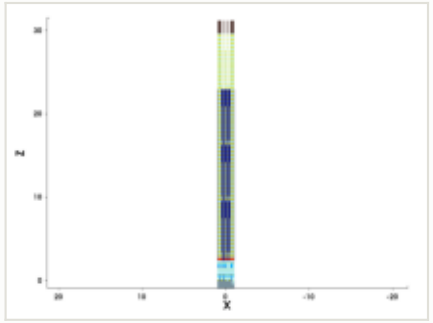

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

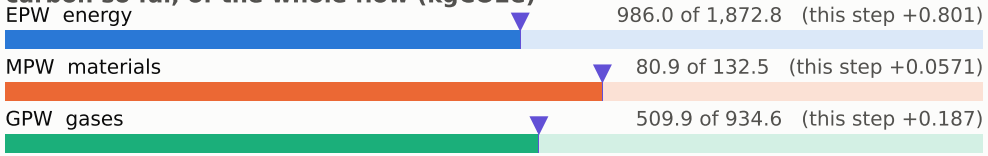

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

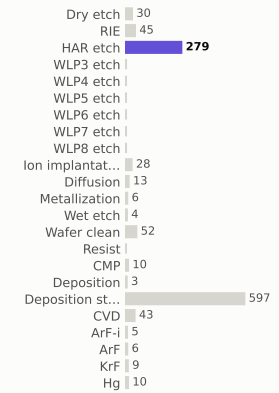

materials deposited (g)



gases emitted (g)

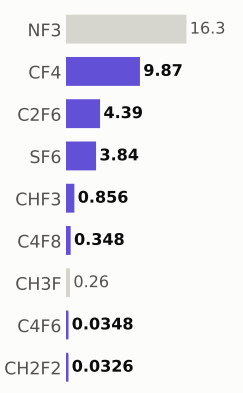

Step #14737.3826: HAR_etch

etch_noop · HAR_etch

1.04	1,577.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

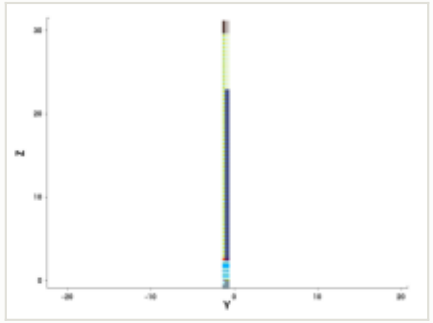

y cut at -1.035 µm

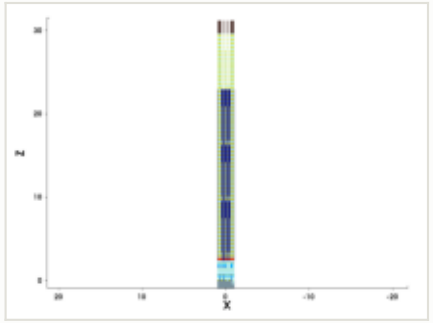

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

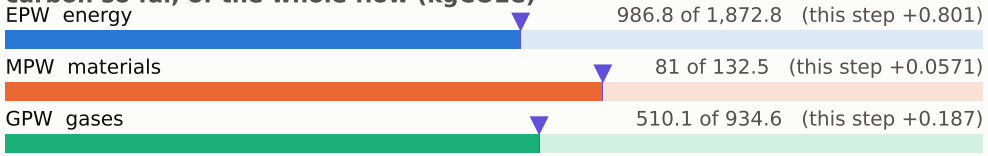

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

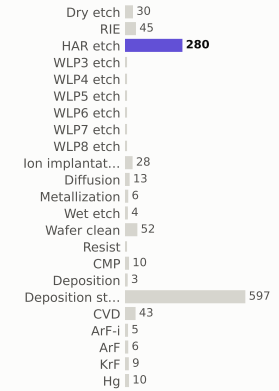

materials deposited (g)

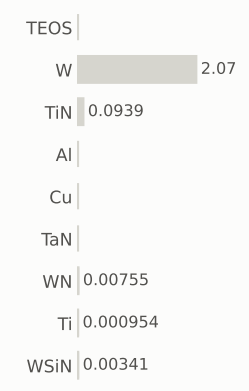

gases emitted (g)

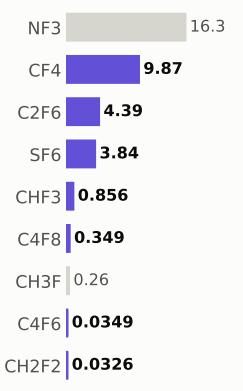

Step #14737.4497: HAR_etch

etch_noop · HAR_etch

1.04	1,578.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

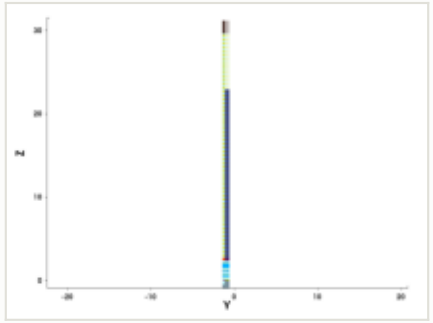

y cut at -1.035 µm

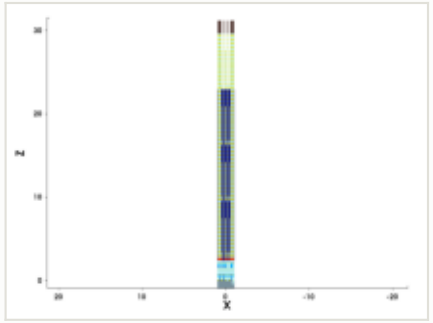

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

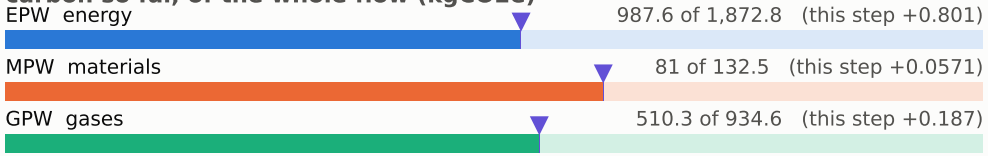

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

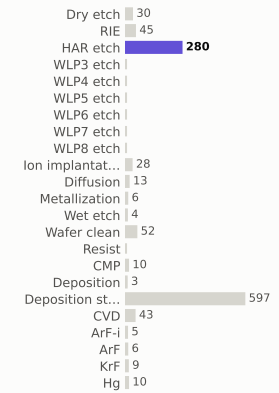

materials deposited (g)

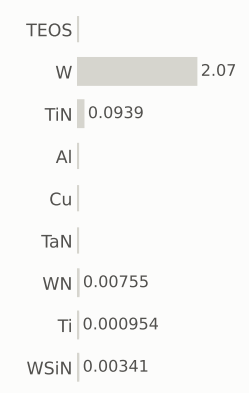

gases emitted (g)

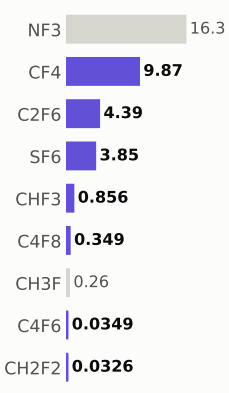

Step #14737.5168: HAR_etch

etch_noop · HAR_etch

1.04	1,579.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

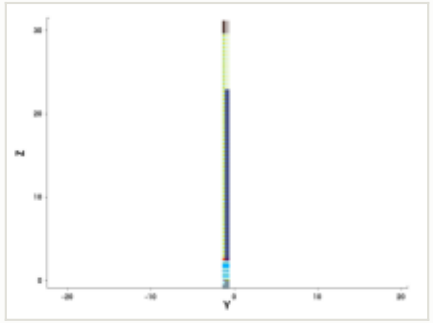

y cut at -1.035 µm

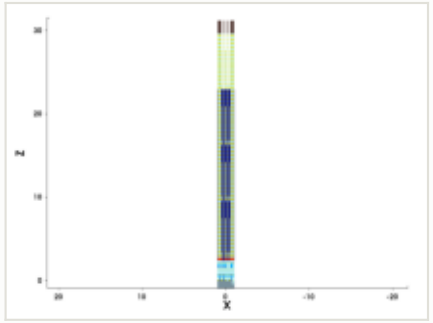

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

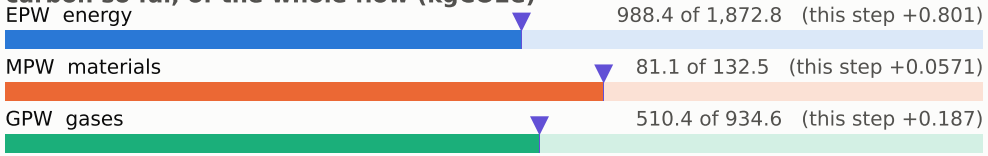

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

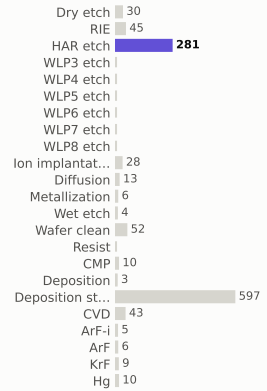

materials deposited (g)

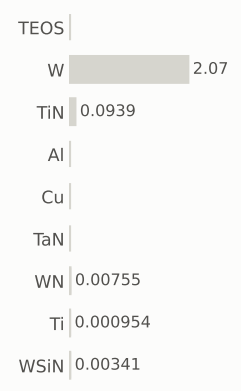

gases emitted (g)

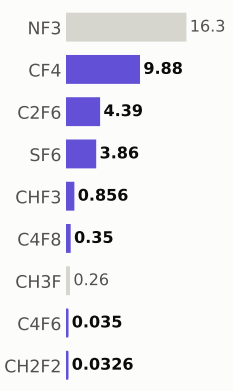

Step #14737.5839: HAR_etch

etch_noop · HAR_etch

1.04	1,580.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

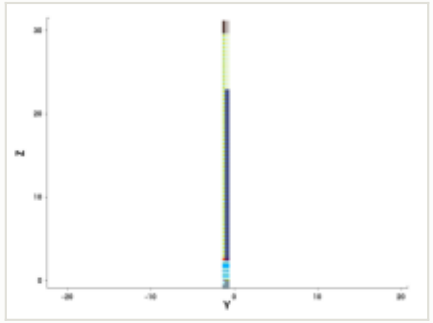

y cut at -1.035 µm

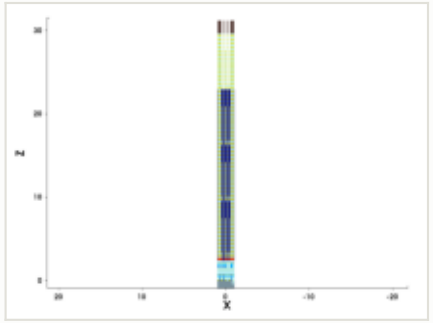

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

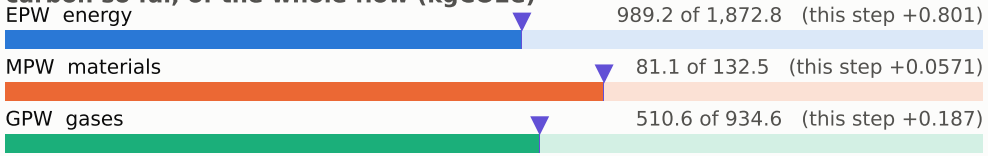

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

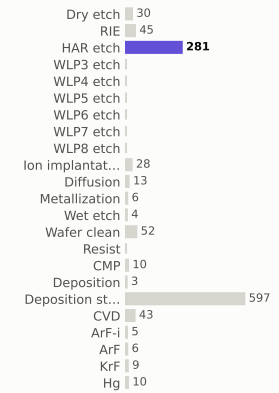

materials deposited (g)

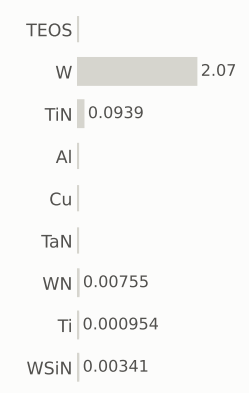

gases emitted (g)

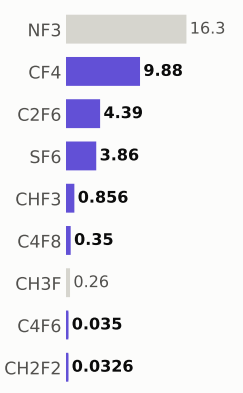

Step #14737.651: HAR_etch

etch_noop · HAR_etch

1.04	1,582.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

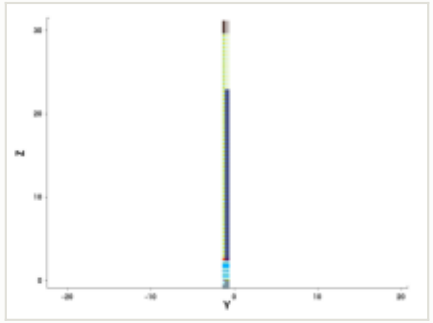

y cut at -1.035 µm

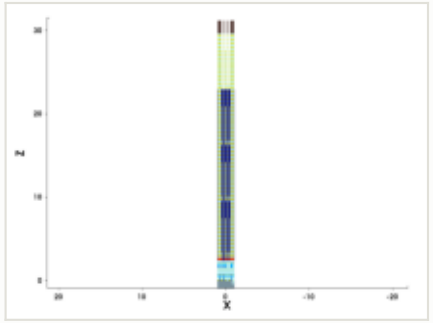

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

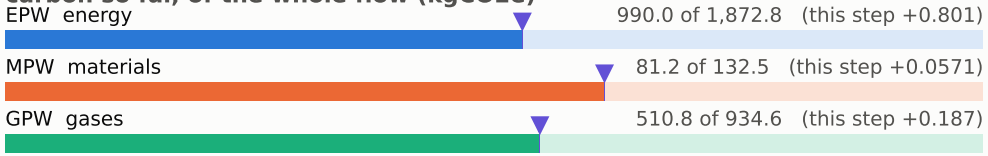

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

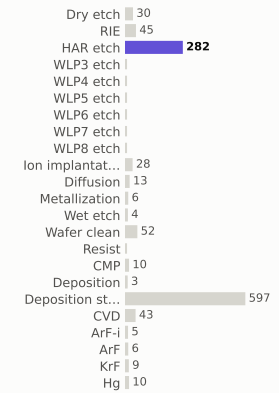

materials deposited (g)

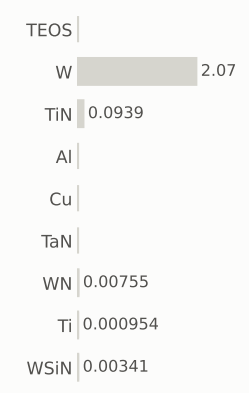

gases emitted (g)

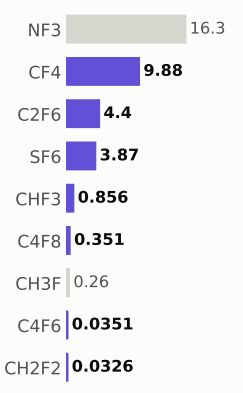

Step #14737.7181: HAR_etch

etch_noop · HAR_etch

1.04	1,583.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

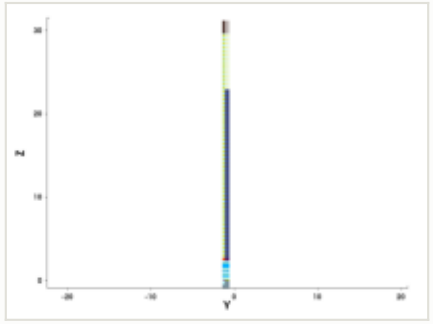

y cut at -1.035 µm

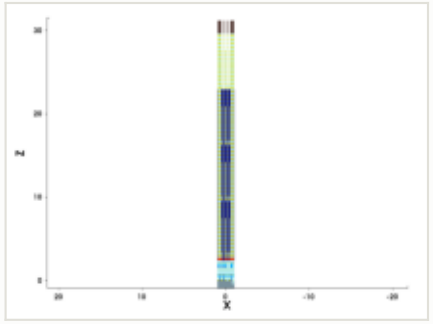

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

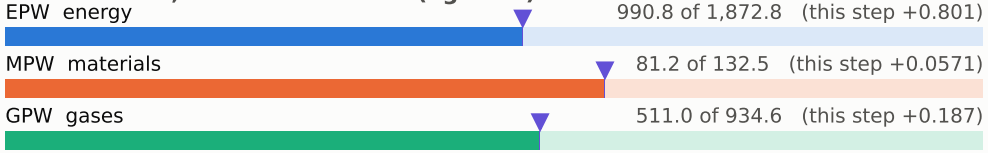

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

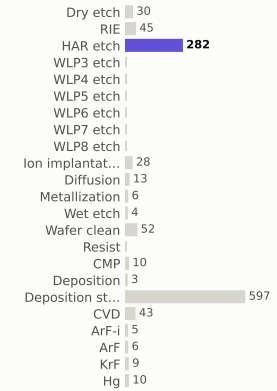

materials deposited (g)

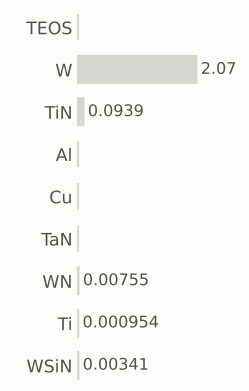

gases emitted (g)

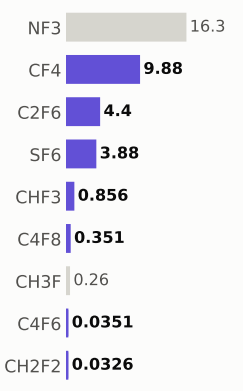

Step #14737.7852: HAR_etch

etch_noop · HAR_etch

1.04	1,584.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

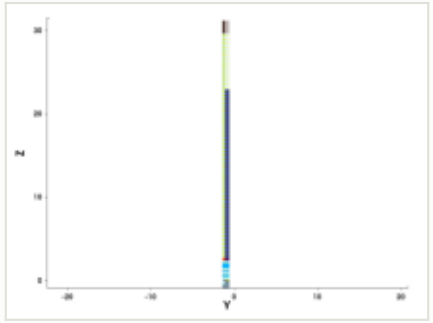

y cut at -1.035 µm

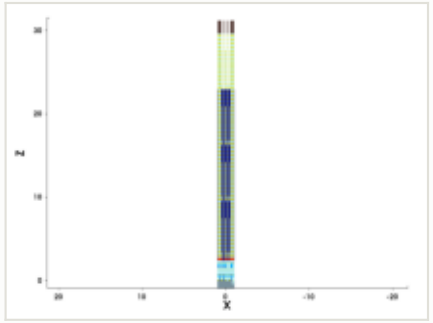

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

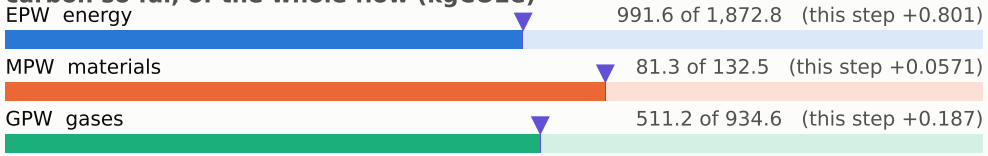

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

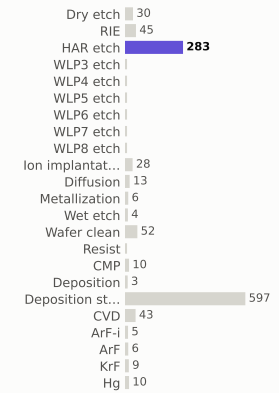

materials deposited (g)

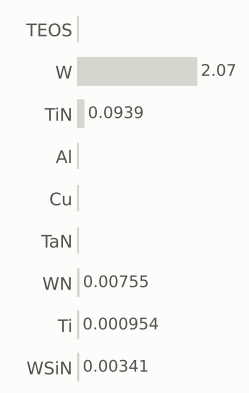

gases emitted (g)

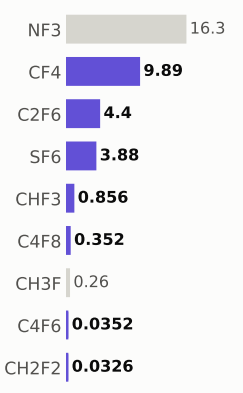

Step #14737.8523: HAR_etch

etch_noop · HAR_etch

1.04	1,585.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

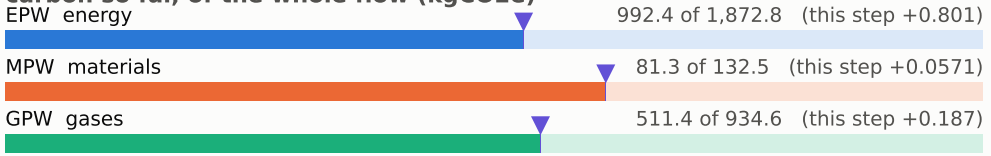

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

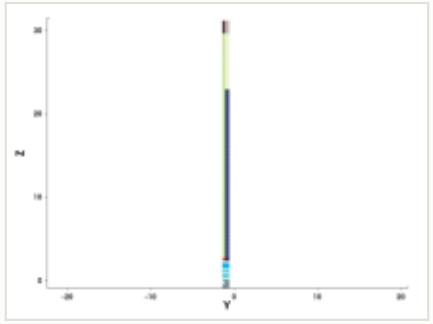

y cut at -1.035 µm

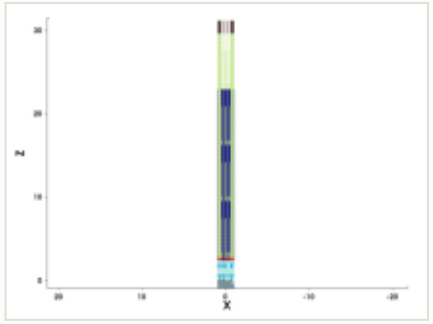

mask for this step

no mask for this step

steps by process area

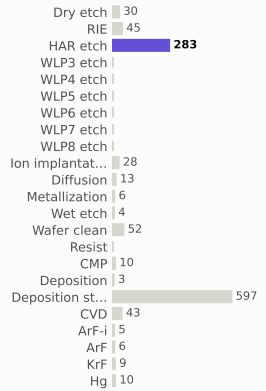

materials deposited (g)

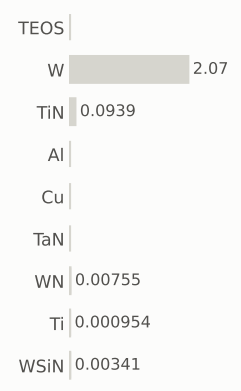

gases emitted (g)

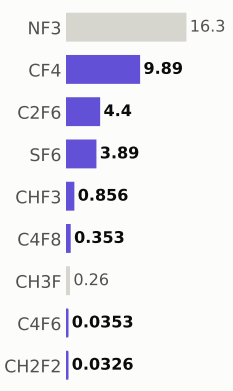

Step #14737.9195: HAR_etch

etch_noop · HAR_etch

1.04	1,586.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

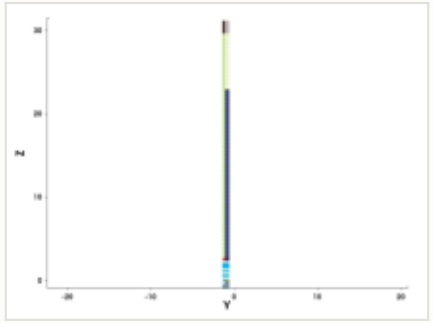

y cut at -1.035 µm

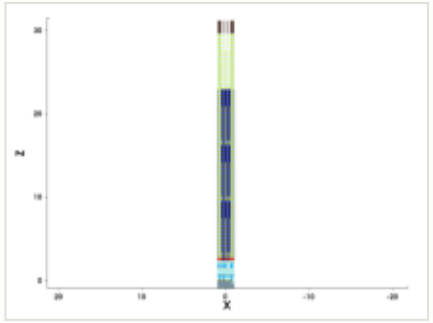

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

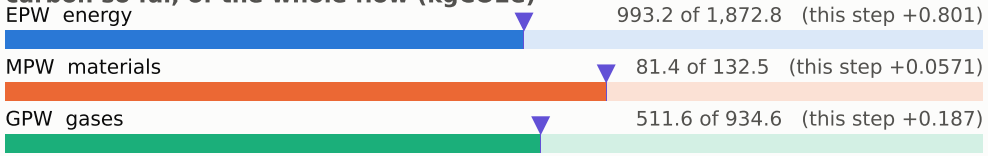

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

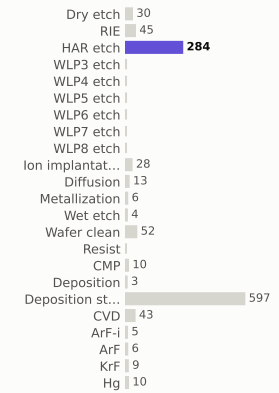

materials deposited (g)



gases emitted (g)

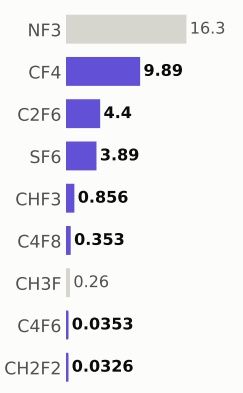

Step #14737.9866: HAR_etch

etch_noop · HAR_etch

1.04	1,587.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

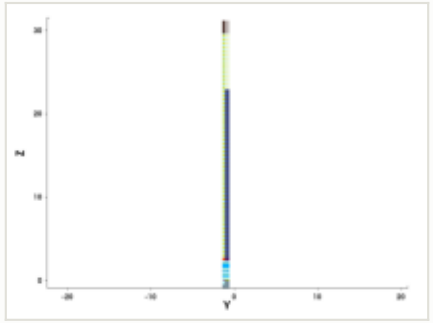

y cut at -1.035 µm

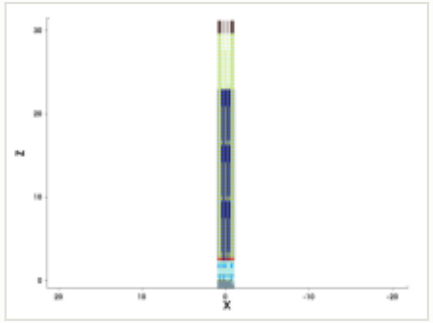

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

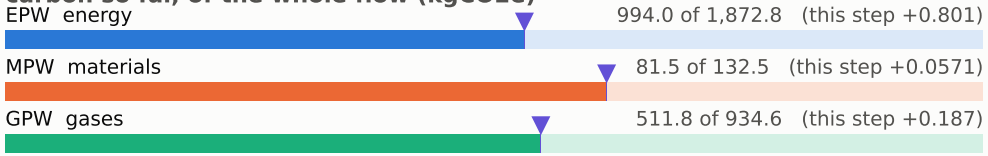

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

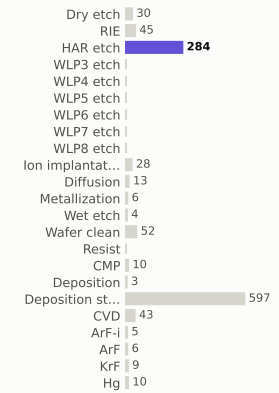

materials deposited (g)

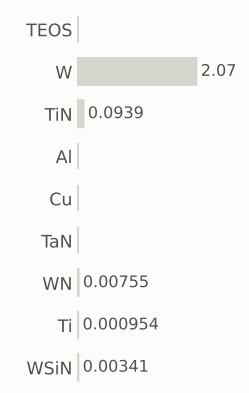

gases emitted (g)

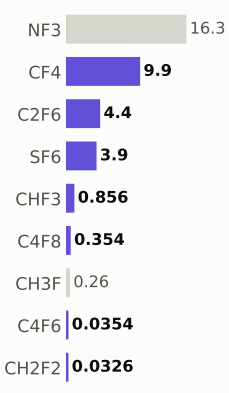

Step #14738.0537: HAR_etch

etch_noop · HAR_etch

1.04	1,588.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

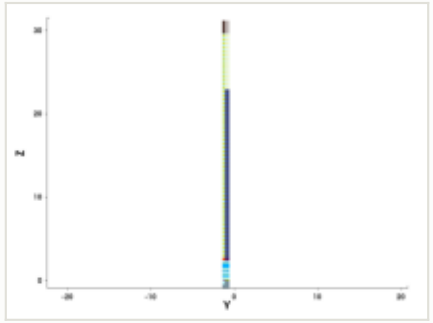

y cut at -1.035 µm

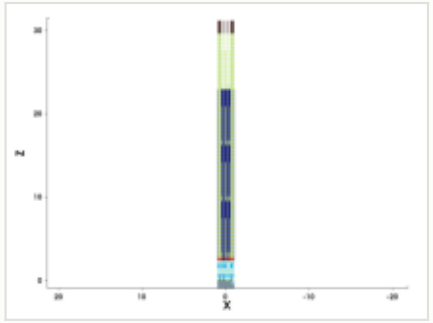

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

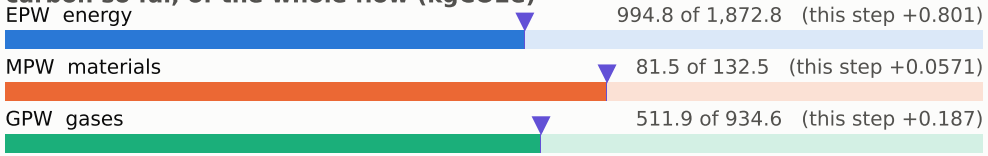

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

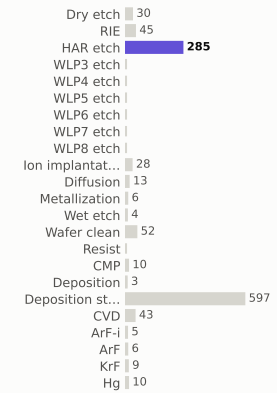

materials deposited (g)

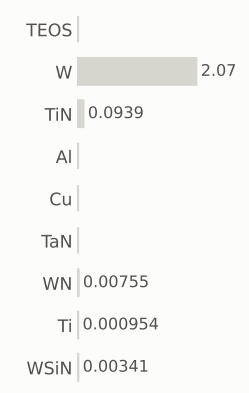

gases emitted (g)

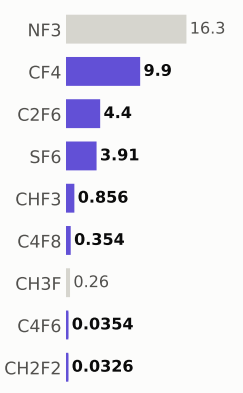

Step #14738.1208: HAR_etch

etch_noop · HAR_etch

1.04	1,589.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

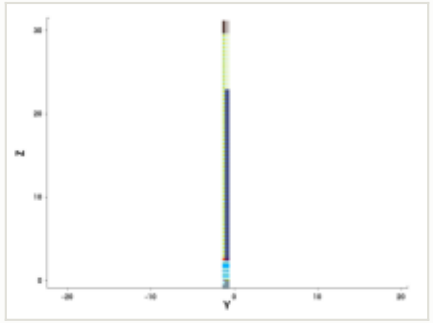

y cut at -1.035 µm

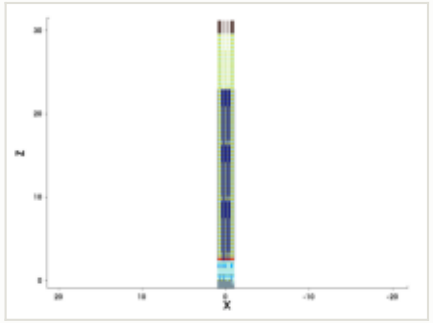

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

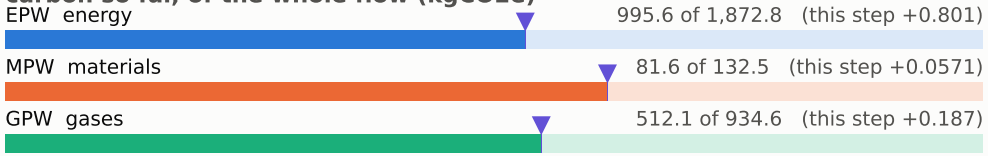

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

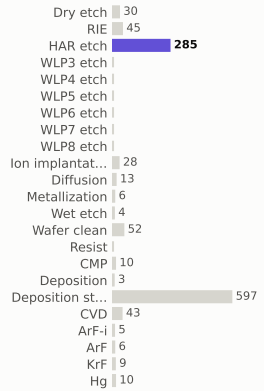

materials deposited (g)

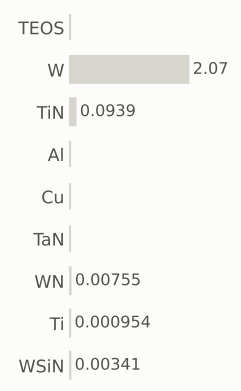

gases emitted (g)

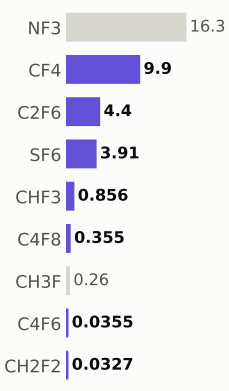

Step #14738.1879: HAR_etch

etch_noop · HAR_etch

1.04	1,590.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

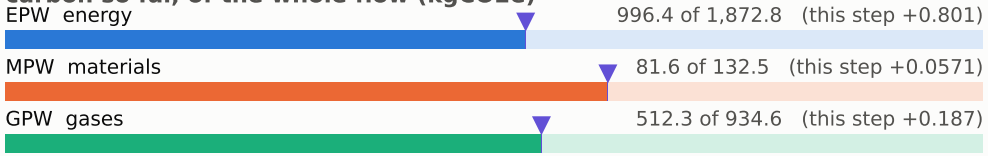

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

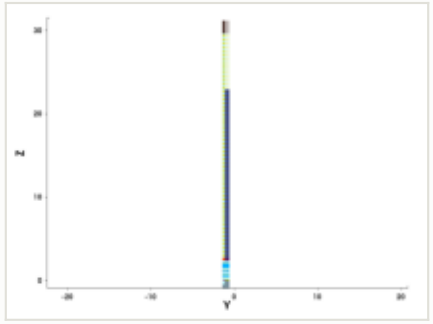

y cut at -1.035 µm

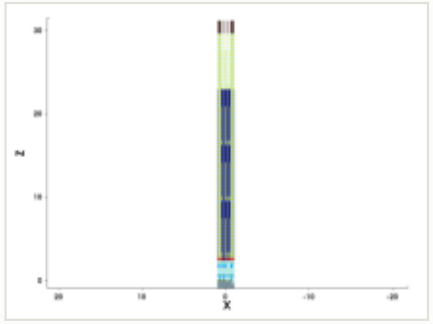

mask for this step

no mask for this step

steps by process area

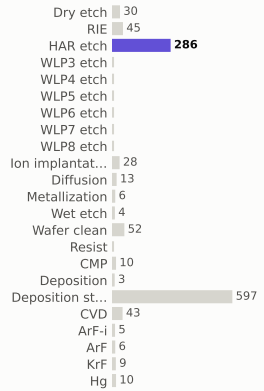

materials deposited (g)

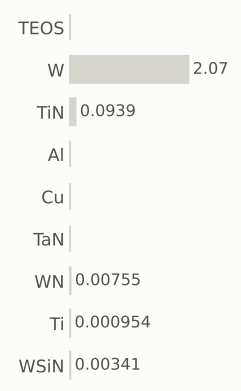

gases emitted (g)

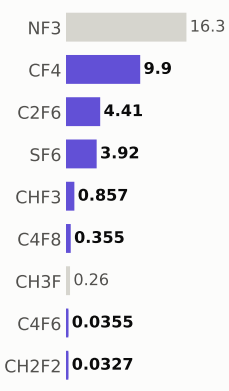

Step #14738.255: HAR_etch

etch_noop · HAR_etch

1.04	1,591.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

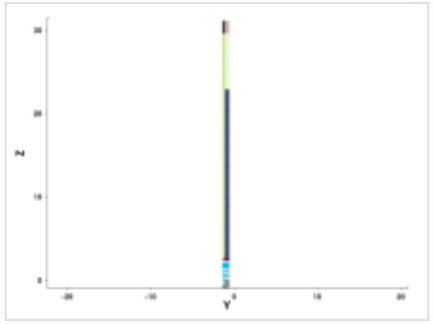

y cut at -1.035 µm

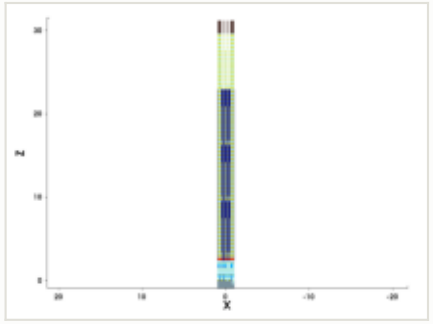

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

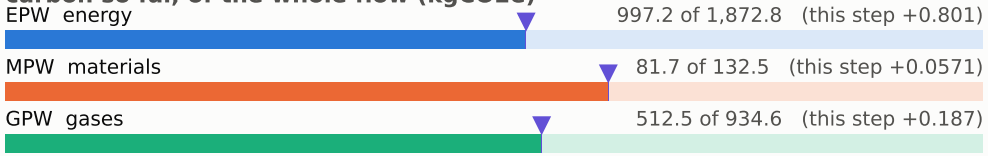

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

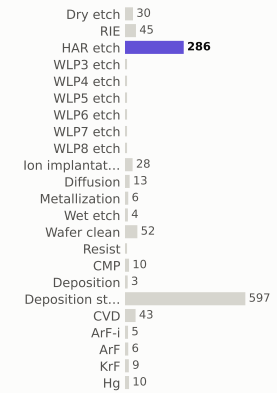

materials deposited (g)

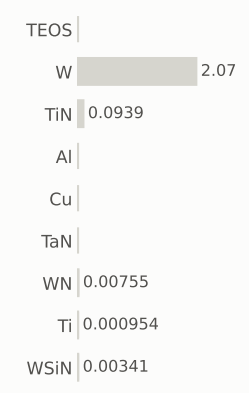

gases emitted (g)

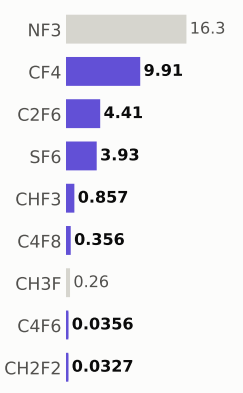

Step #14738.3221: HAR_etch

etch_noop · HAR_etch

1.04	1,592.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

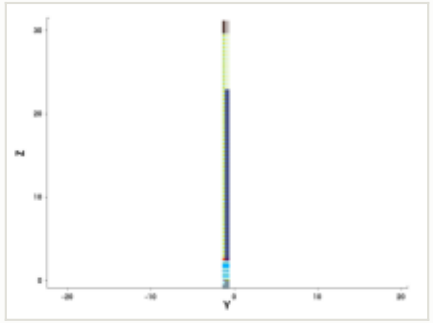

y cut at -1.035 µm

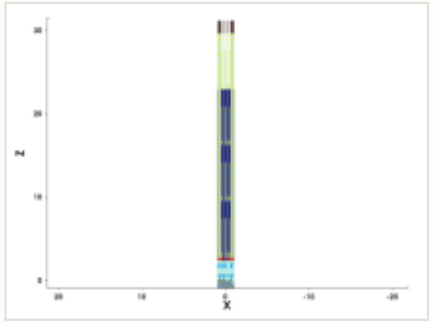

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

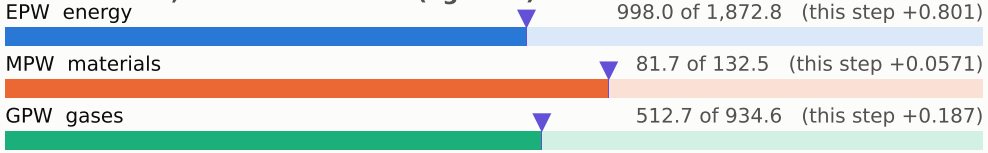

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

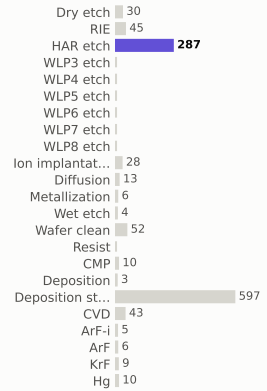

materials deposited (g)

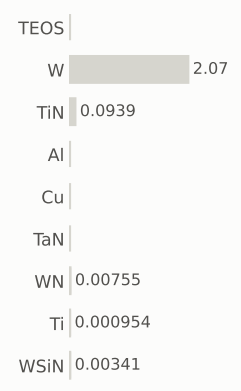

gases emitted (g)

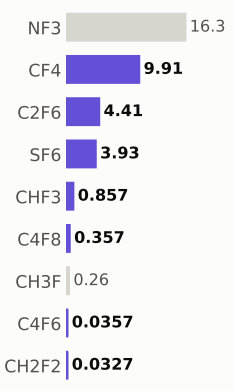

Step #14738.3893: HAR_etch

etch_noop · HAR_etch

1.04	1,593.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

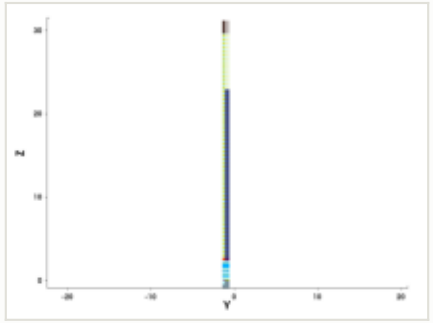

y cut at -1.035 µm

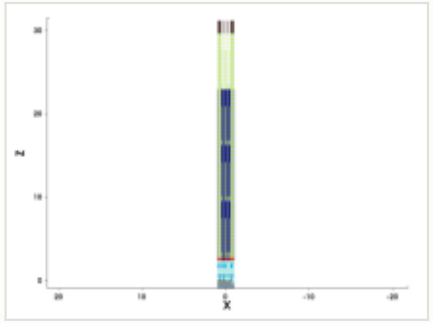

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

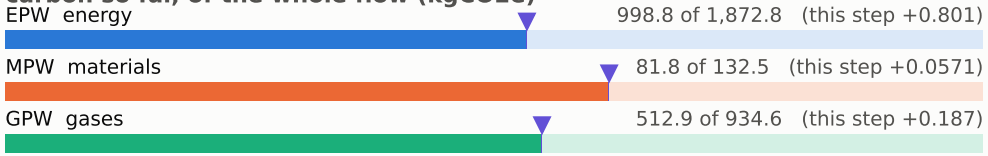

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

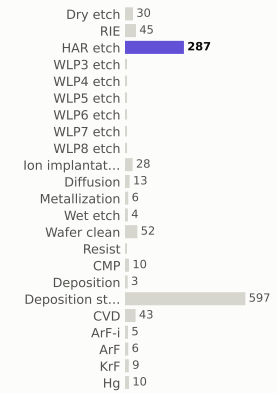

materials deposited (g)

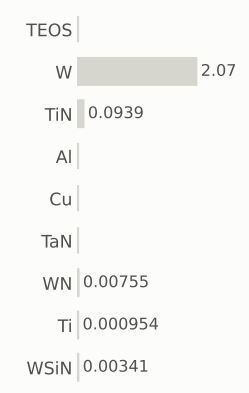

gases emitted (g)

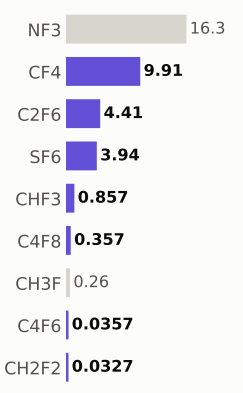

Step #14738.4564: HAR_etch

etch_noop · HAR_etch

1.04	1,594.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

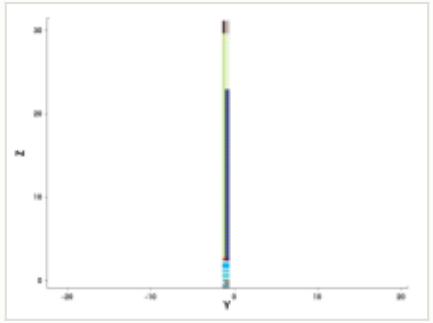

y cut at -1.035 µm

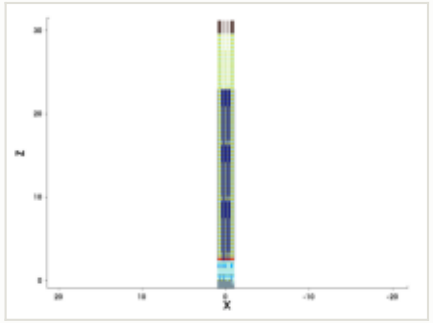

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

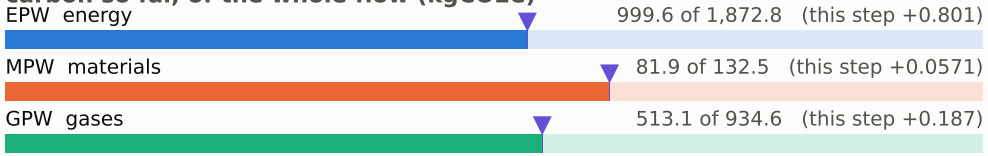

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

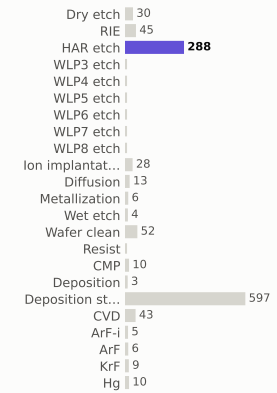

materials deposited (g)

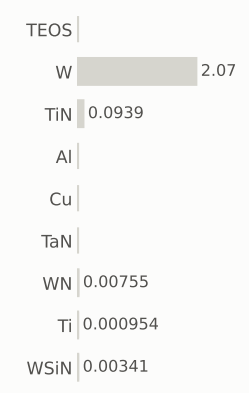

gases emitted (g)

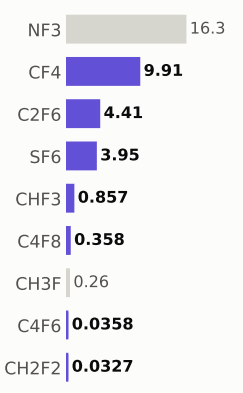

Step #14738.5235: HAR_etch

etch_noop · HAR_etch

1.04	1,595.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

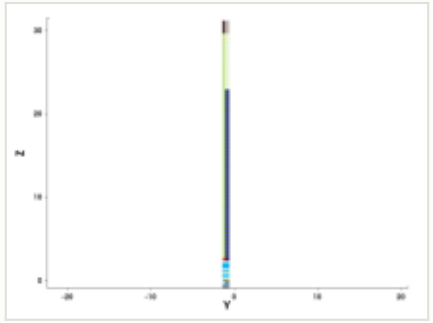

y cut at -1.035 µm

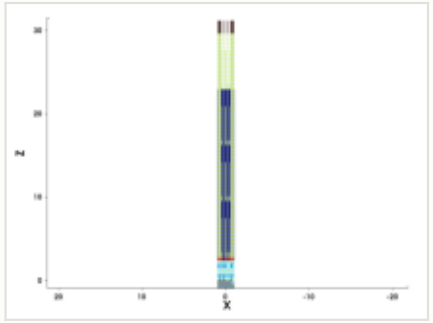

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

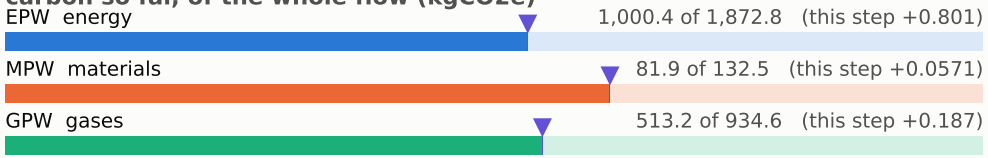

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

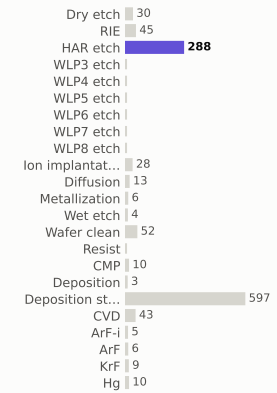

materials deposited (g)

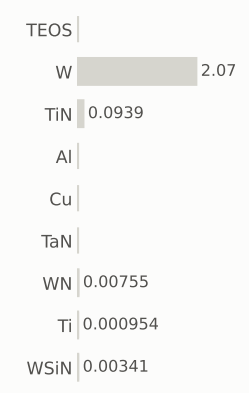

gases emitted (g)

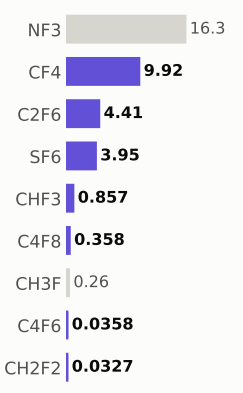

Step #14738.5906: HAR_etch

etch_noop · HAR_etch

1.04	1,596.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

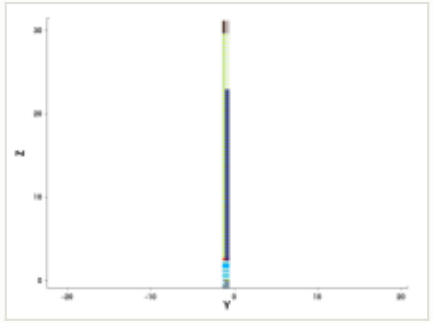

y cut at -1.035 µm

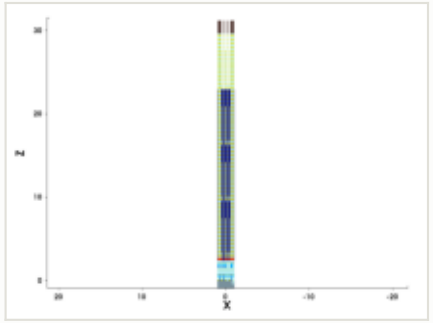

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

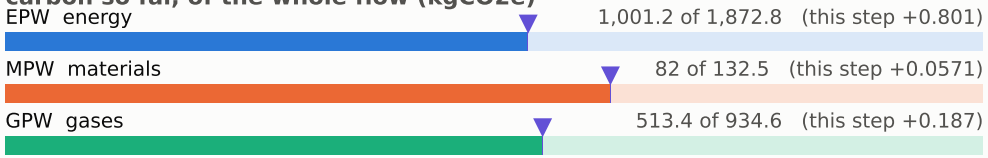

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

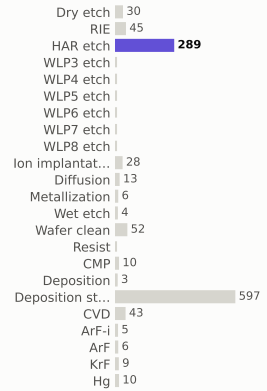

materials deposited (g)

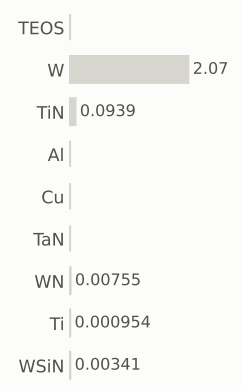

gases emitted (g)

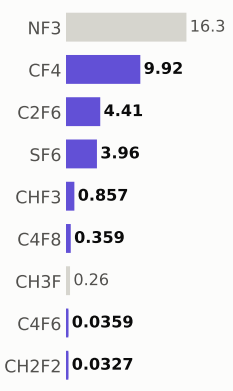

Step #14738.6577: HAR_etch

etch_noop · HAR_etch

1.04	1,597.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

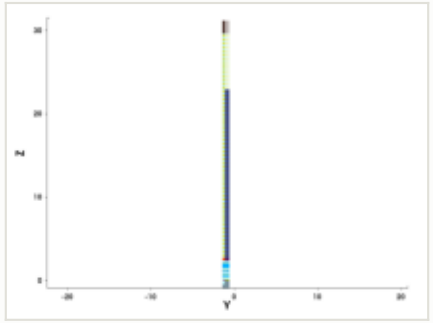

y cut at -1.035 µm

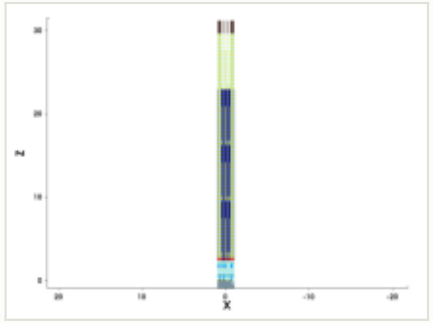

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

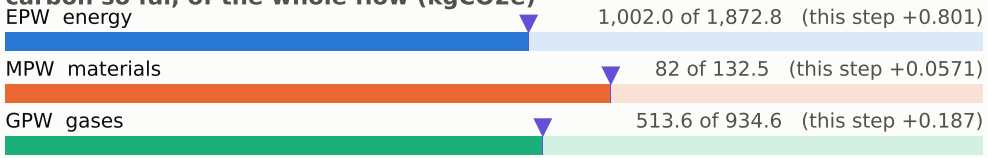

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

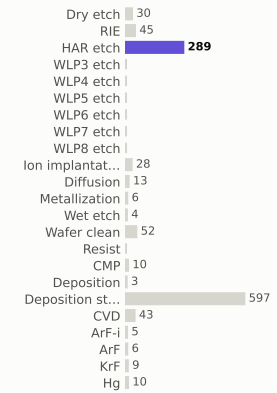

materials deposited (g)

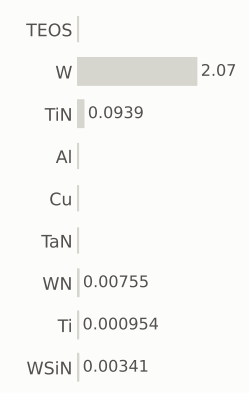

gases emitted (g)

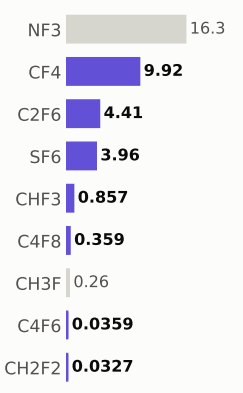

Step #14738.7248: HAR_etch

etch_noop · HAR_etch

1.04	1,598.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

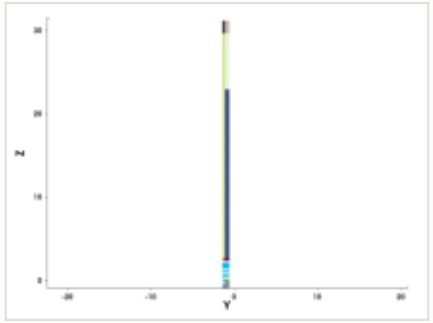

y cut at -1.035 µm

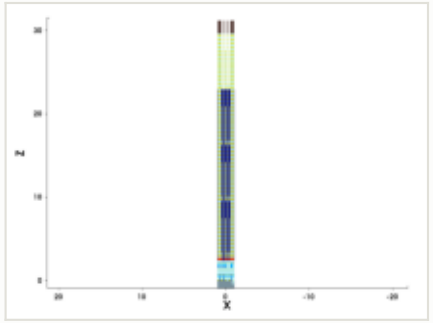

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

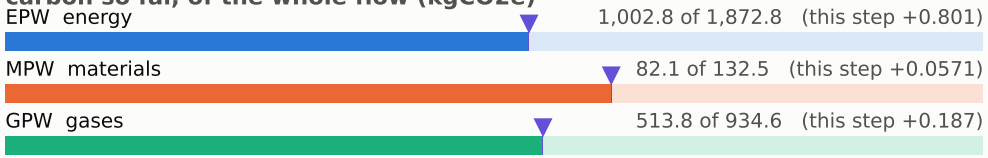

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

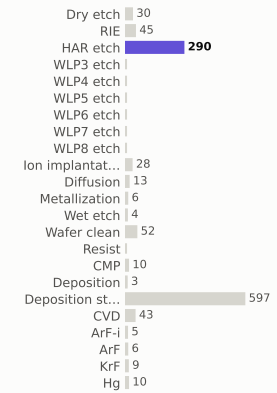

materials deposited (g)

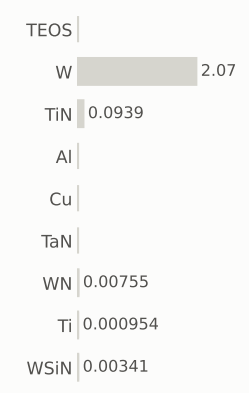

gases emitted (g)

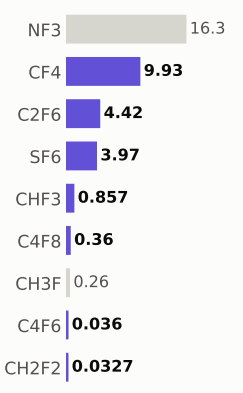

Step #14738.7919: HAR_etch

etch_noop · HAR_etch

1.04	1,599.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

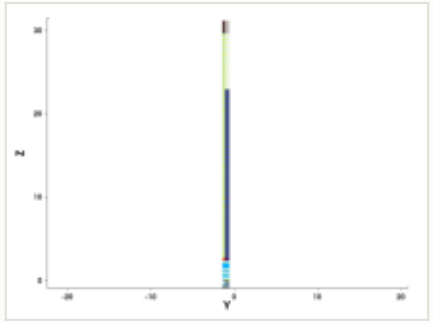

y cut at -1.035 µm

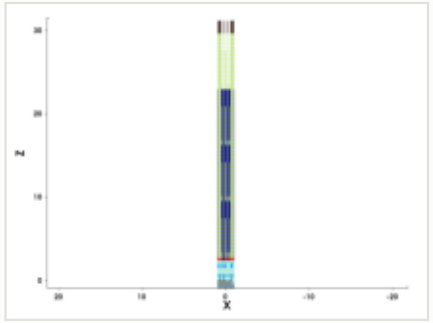

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

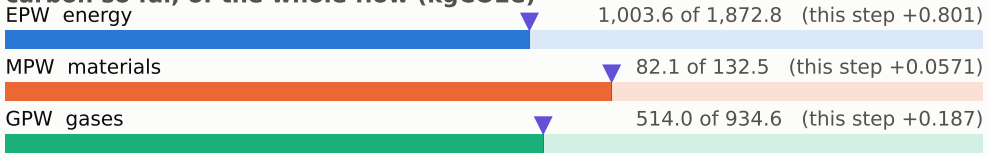

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

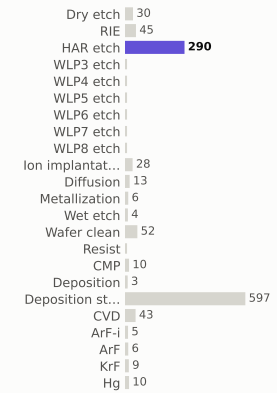

materials deposited (g)

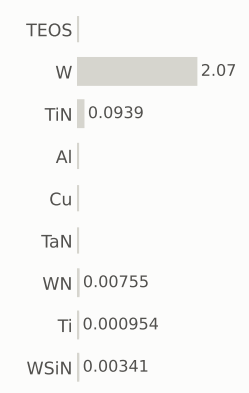

gases emitted (g)

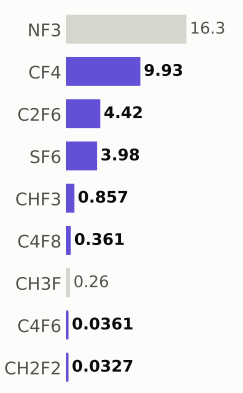

Step #14738.8591: HAR_etch

etch_noop · HAR_etch

1.04	1,600.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

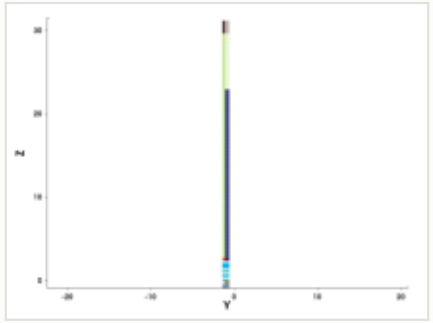

y cut at -1.035 µm

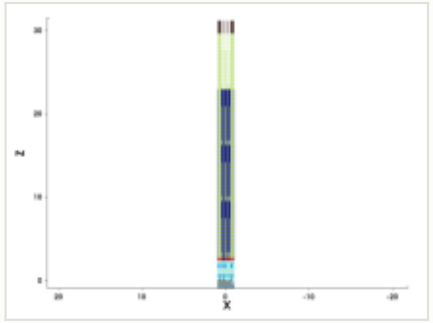

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

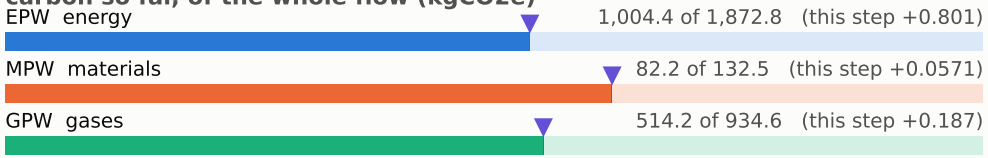

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

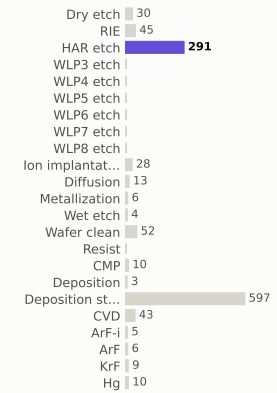

materials deposited (g)

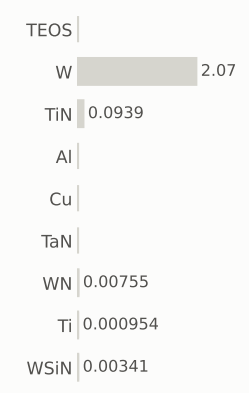

gases emitted (g)

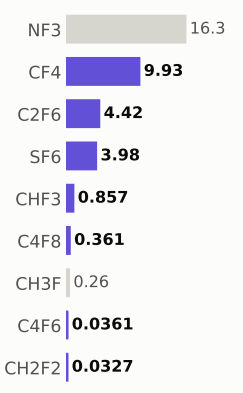

Step #14738.9262: HAR_etch

etch_noop · HAR_etch

1.04	1,601.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

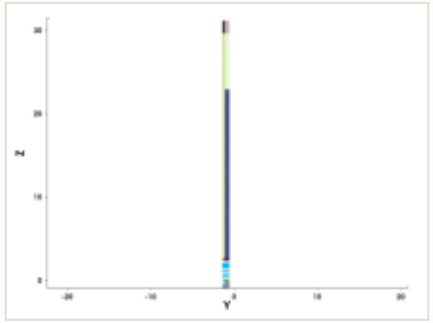

y cut at -1.035 µm

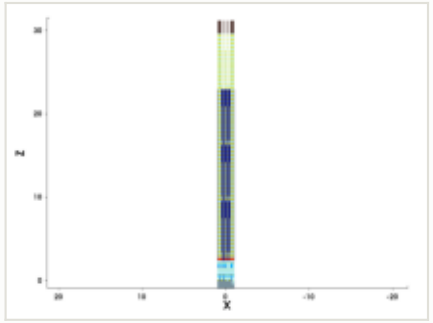

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

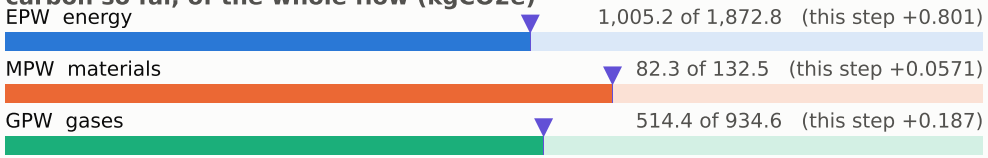

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

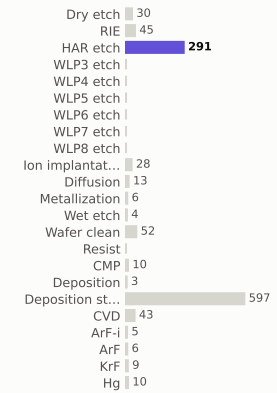

materials deposited (g)

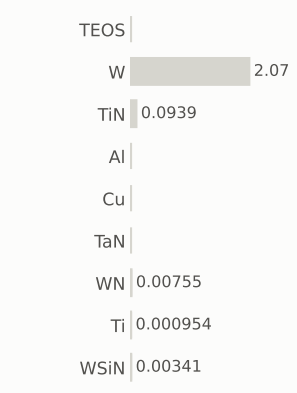

gases emitted (g)

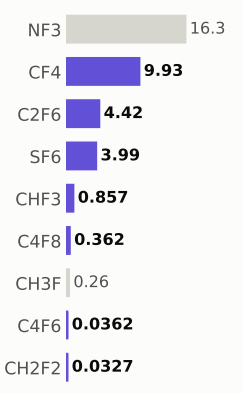

Step #14738.9933: HAR_etch

etch_noop · HAR_etch

1.04	1,602.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

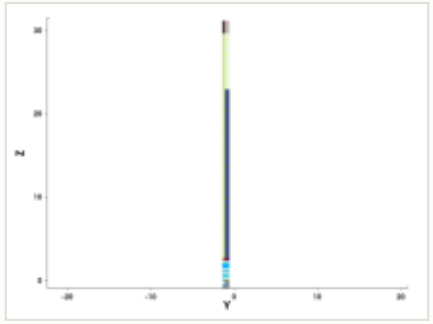

y cut at -1.035 µm

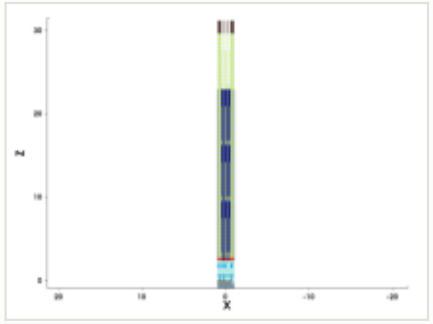

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

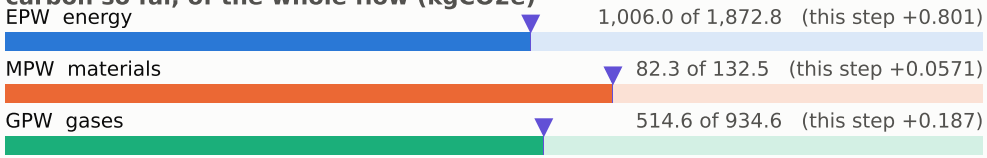

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

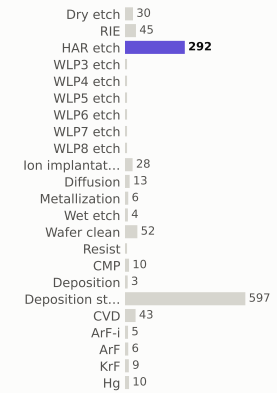

materials deposited (g)

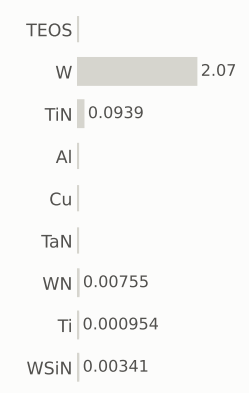

gases emitted (g)

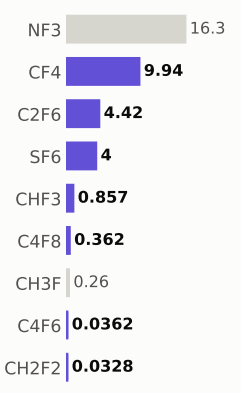

Step #14739.0604: HAR_etch

etch_noop · HAR_etch

1.04	1,603.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

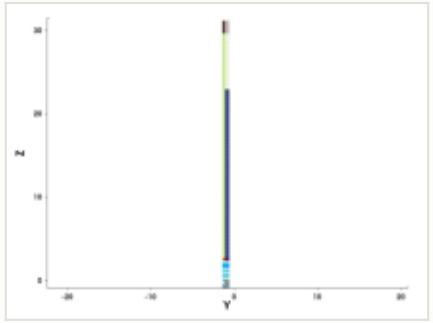

y cut at -1.035 µm

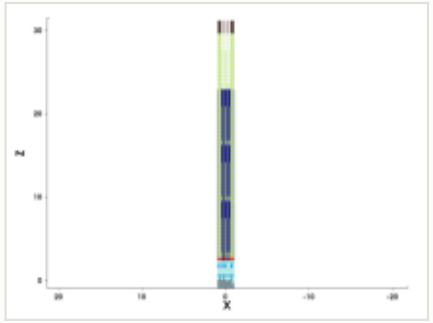

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

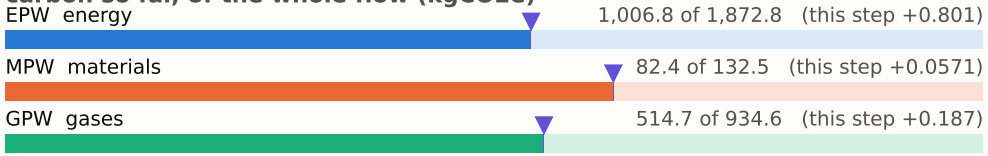

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

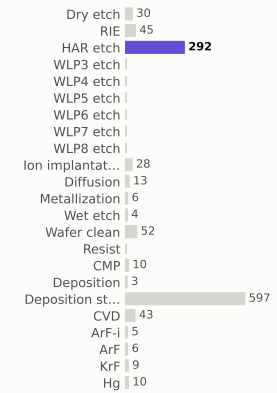

materials deposited (g)

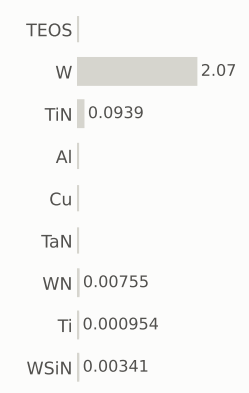

gases emitted (g)

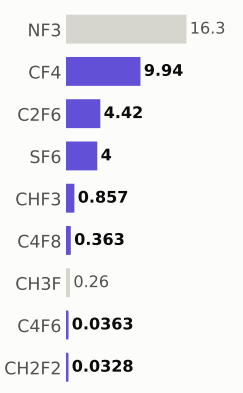

Step #14739.1275: HAR_etch

etch_noop · HAR_etch

1.04	1,605.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

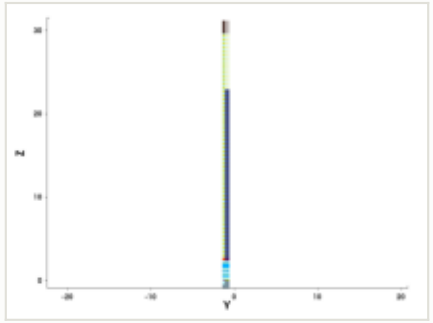

y cut at -1.035 µm

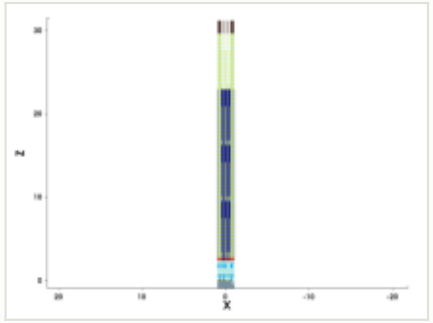

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

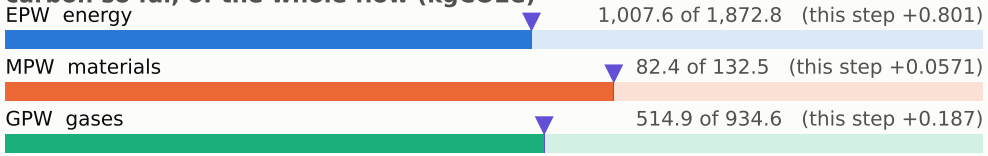

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

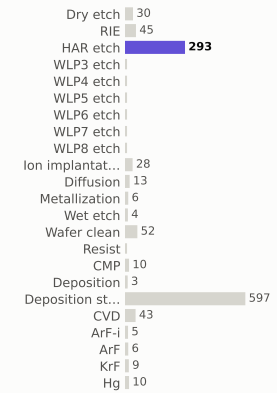

materials deposited (g)

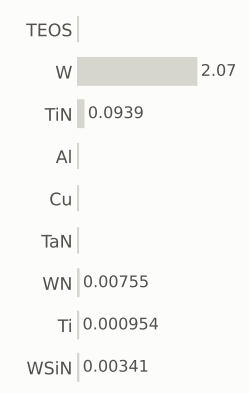

gases emitted (g)

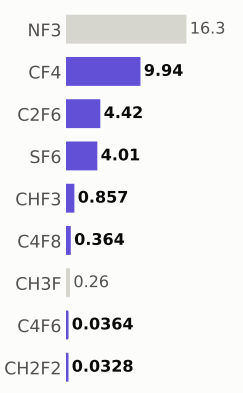

Step #14739.1946: HAR_etch

etch_noop · HAR_etch

1.04	1,606.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

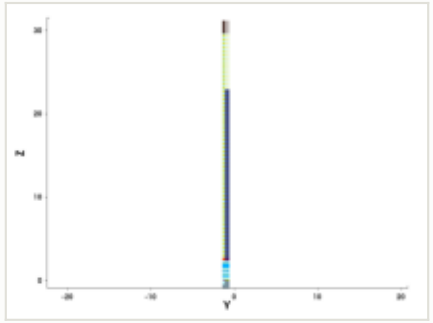

y cut at -1.035 µm

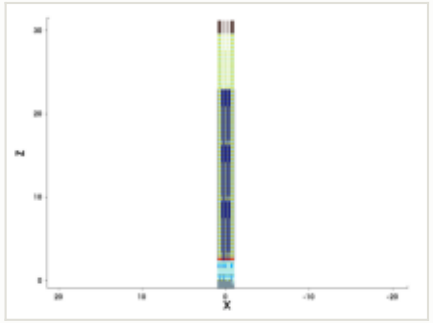

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

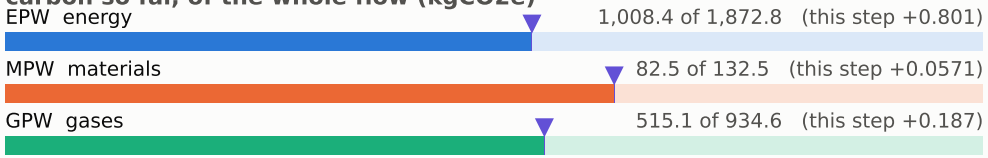

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

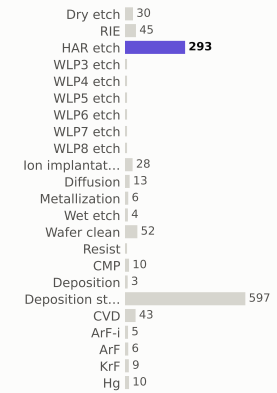

materials deposited (g)

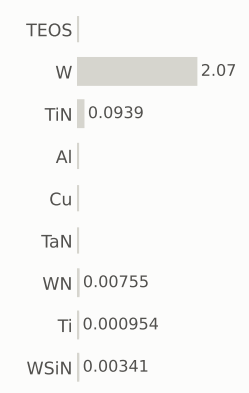

gases emitted (g)

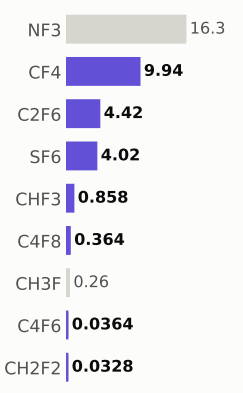

Step #14739.2617: HAR_etch

etch_noop · HAR_etch

1.04	1,607.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

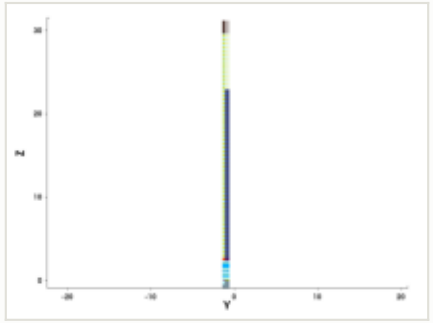

y cut at -1.035 µm

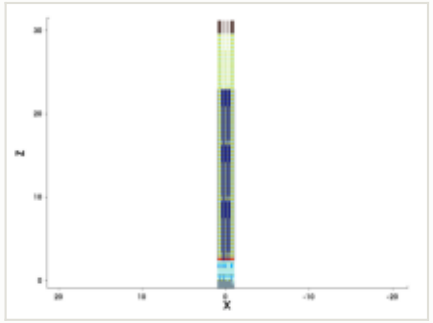

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

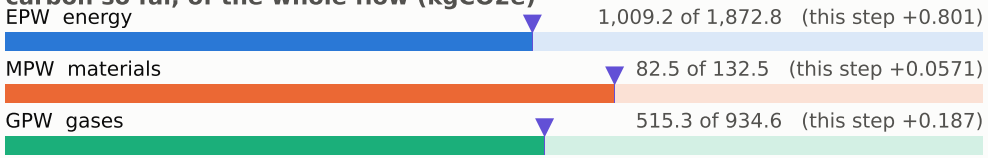

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

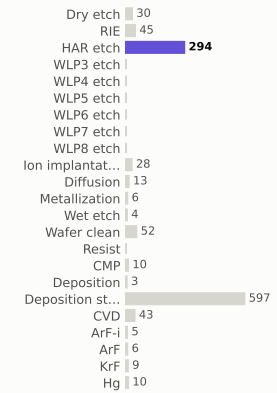

materials deposited (g)

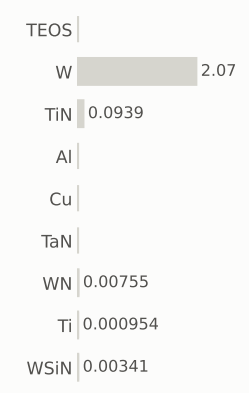

gases emitted (g)

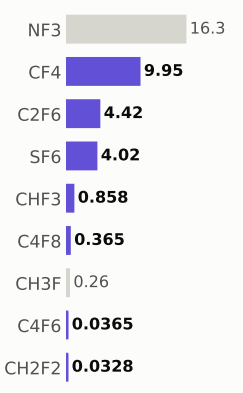

Step #14739.3289: HAR_etch

etch_noop · HAR_etch

1.04	1,608.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

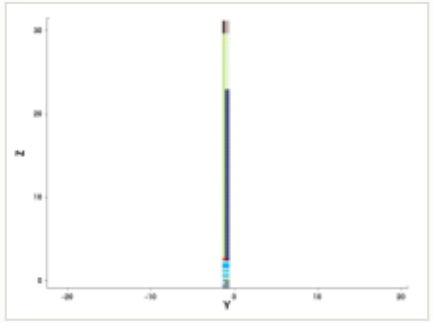

y cut at -1.035 µm

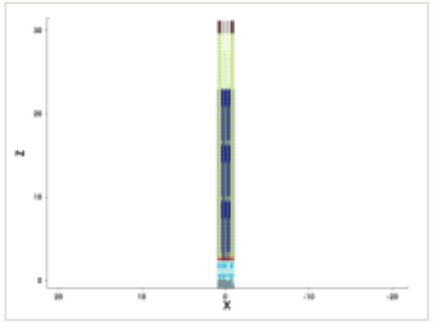

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

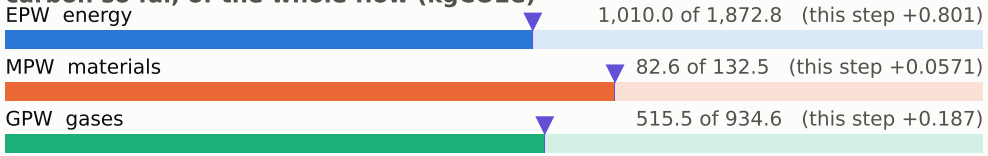

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

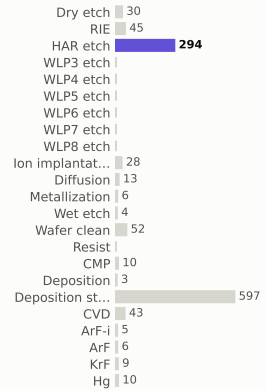

materials deposited (g)

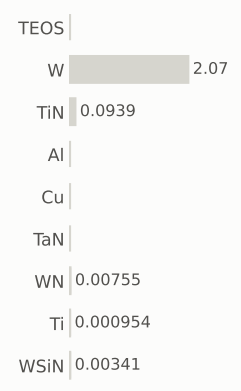

gases emitted (g)

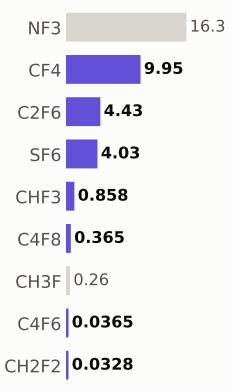

Step #14739.396: HAR_etch

etch_noop · HAR_etch

1.04	1,609.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

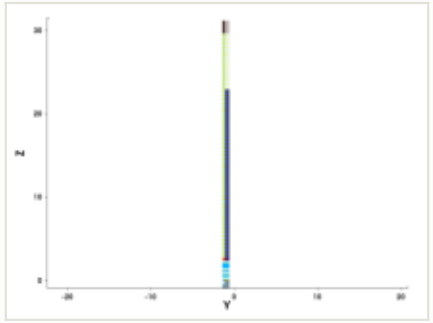

y cut at -1.035 µm

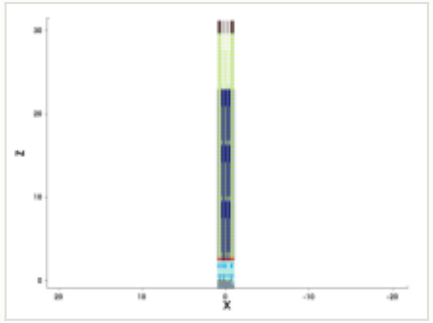

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

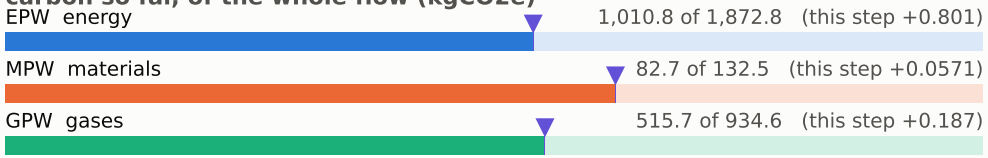

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

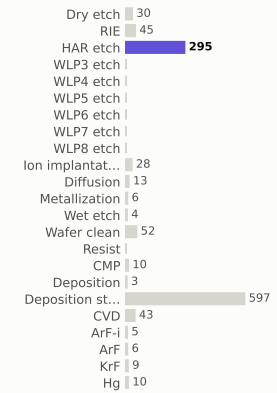

materials deposited (g)

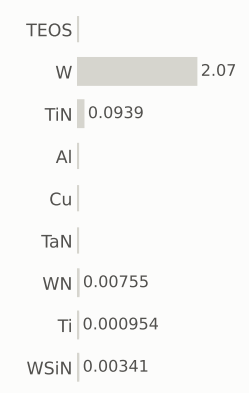

gases emitted (g)

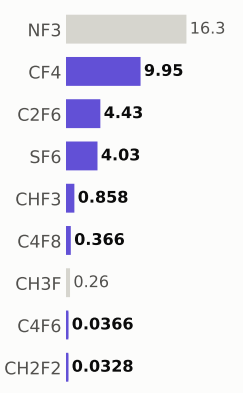

Step #14739.4631: HAR_etch

etch_noop · HAR_etch

1.04	1,610.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

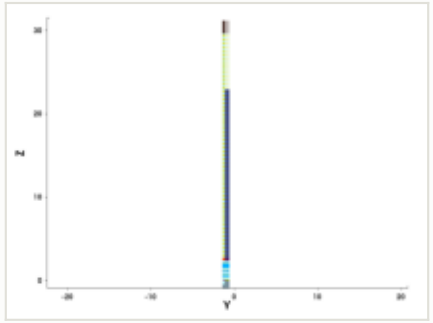

y cut at -1.035 µm

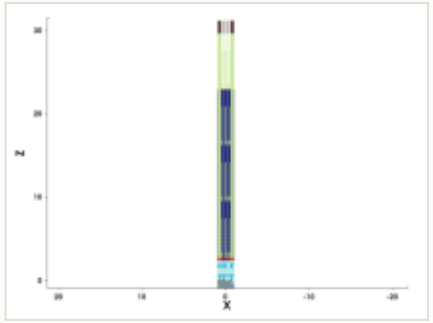

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

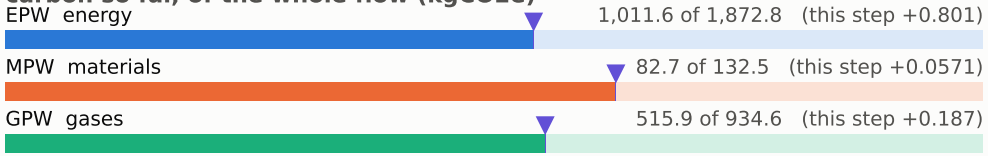

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

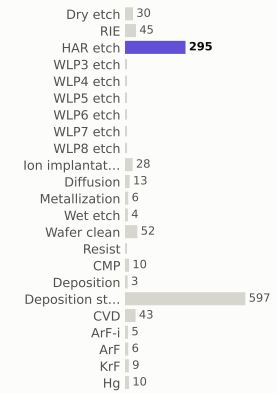

materials deposited (g)

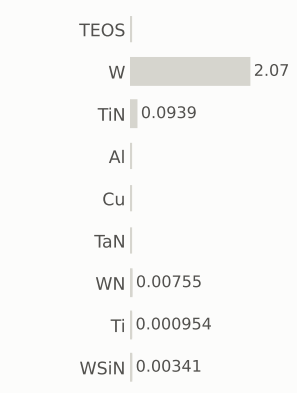

gases emitted (g)

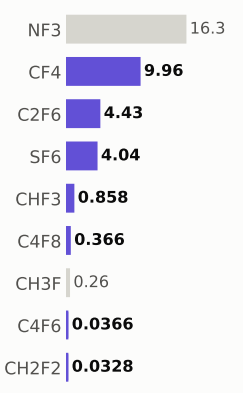

Step #14739.5302: HAR_etch

etch_noop · HAR_etch

1.04	1,611.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

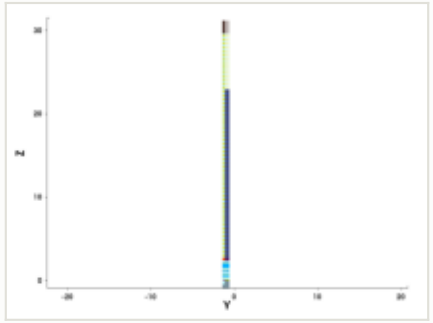

y cut at -1.035 µm

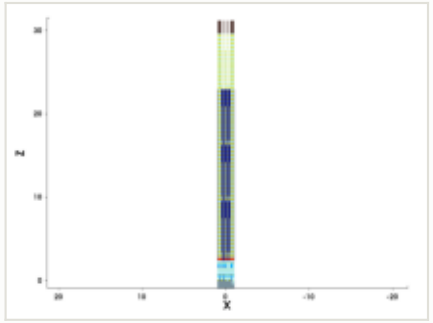

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

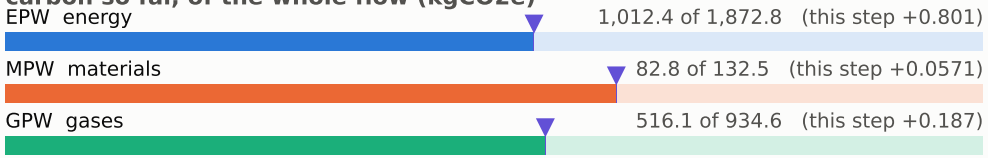

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

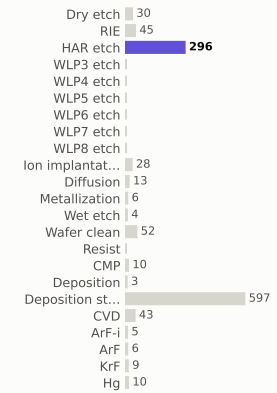

materials deposited (g)

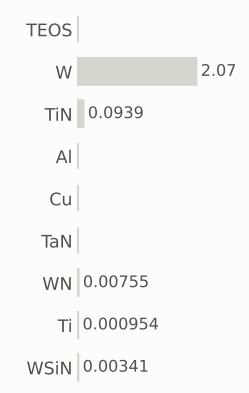

gases emitted (g)

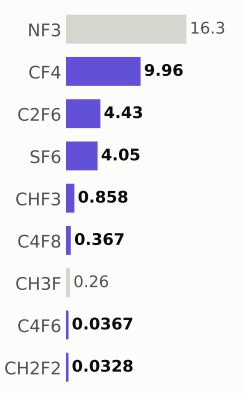

Step #14739.5973: HAR_etch

etch_noop · HAR_etch

1.04	1,612.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

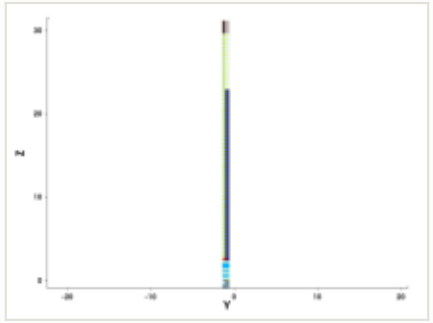

y cut at -1.035 µm

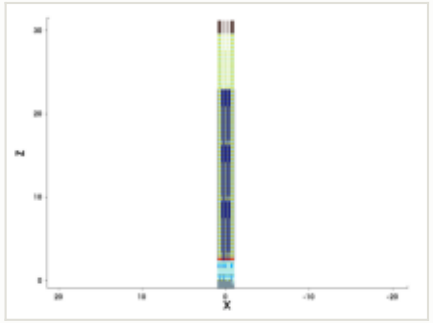

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

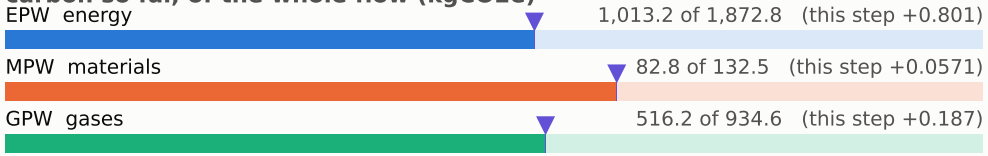

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

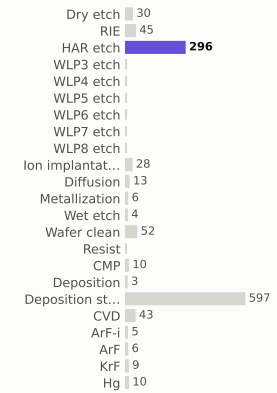

materials deposited (g)

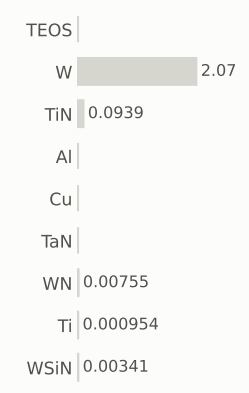

gases emitted (g)

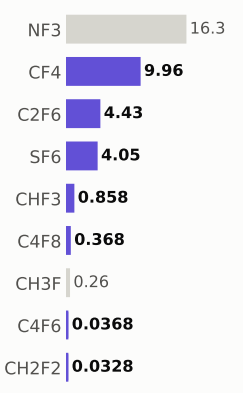

Step #14739.6644: HAR_etch

etch_noop · HAR_etch

1.04	1,613.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

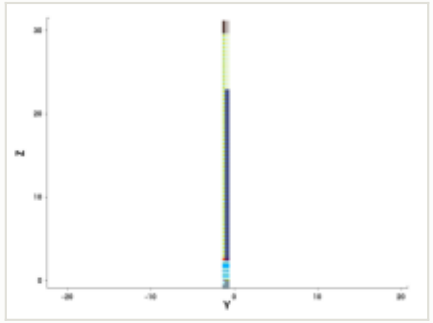

y cut at -1.035 µm

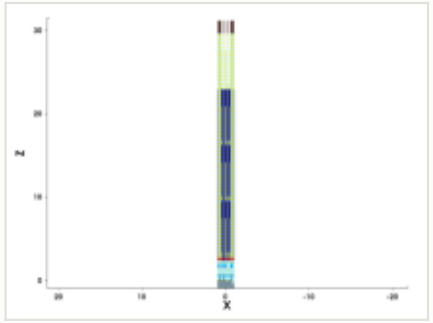

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

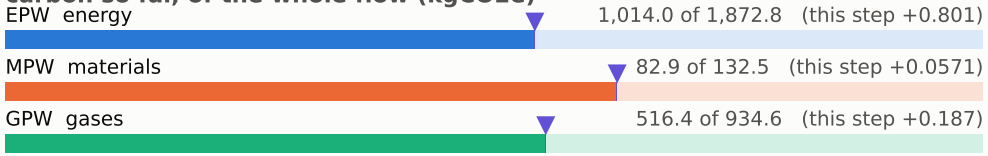

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

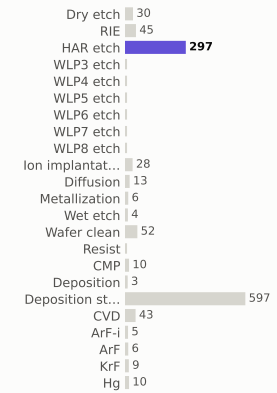

materials deposited (g)

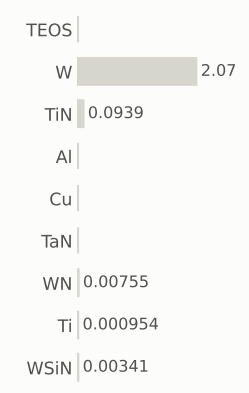

gases emitted (g)

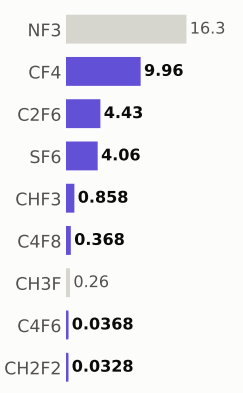

Step #14739.7315: HAR_etch

etch_noop · HAR_etch

1.04	1,614.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

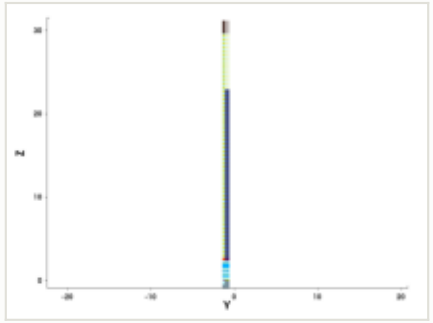

y cut at -1.035 µm

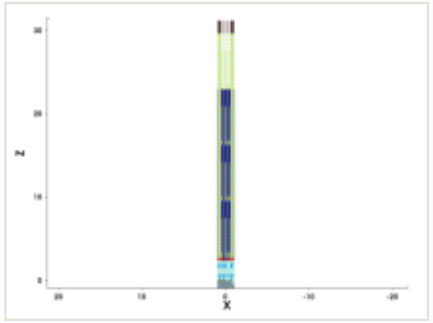

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

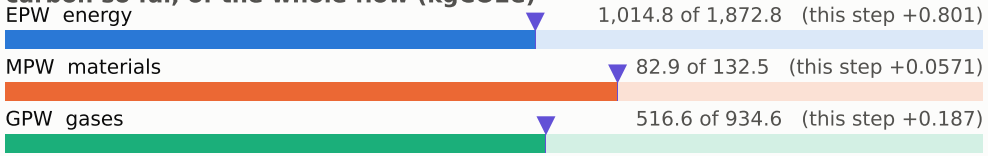

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

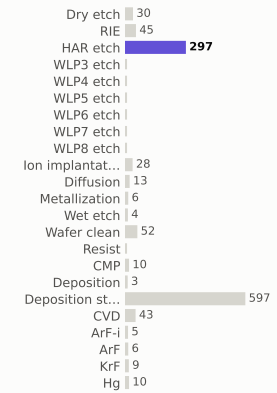

materials deposited (g)

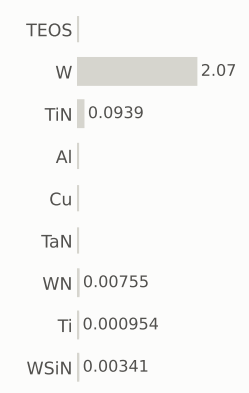

gases emitted (g)

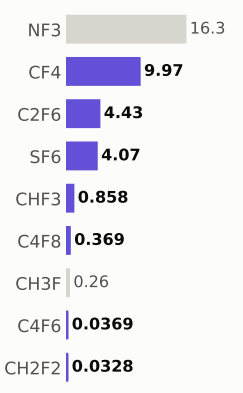

Step #14739.7987: HAR_etch

etch_noop · HAR_etch

1.04	1,615.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

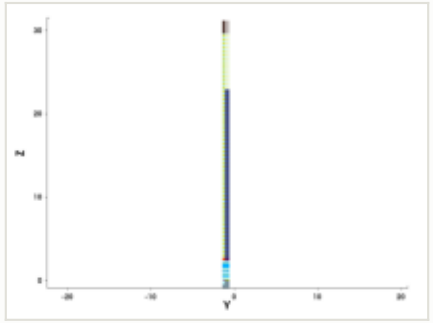

y cut at -1.035 µm

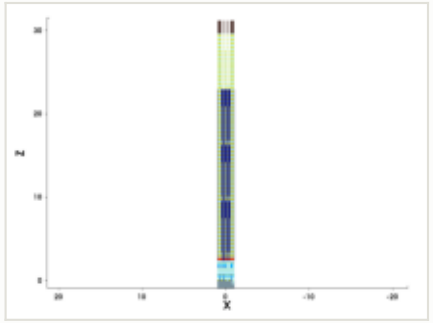

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

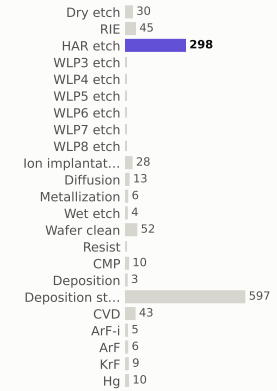

materials deposited (g)

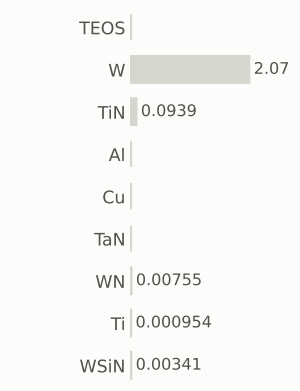

gases emitted (g)

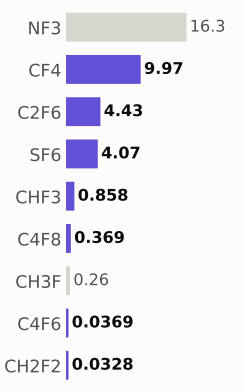

Step #14739.8658: HAR_etch

etch_noop · HAR_etch

1.04	1,616.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

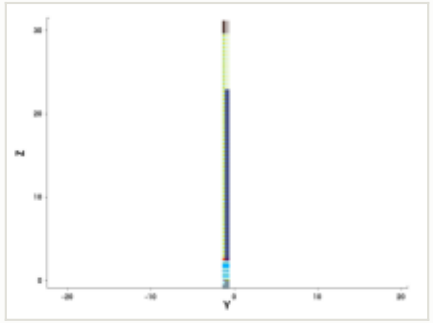

y cut at -1.035 µm

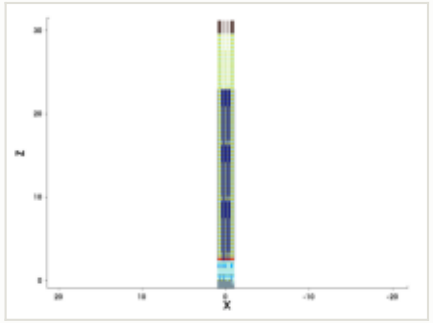

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

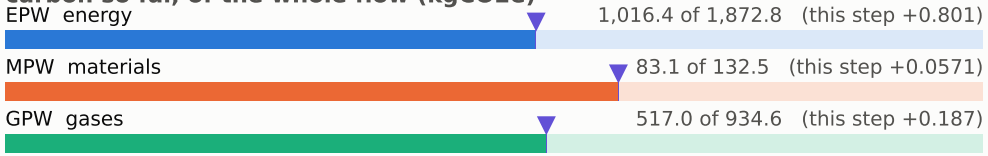

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

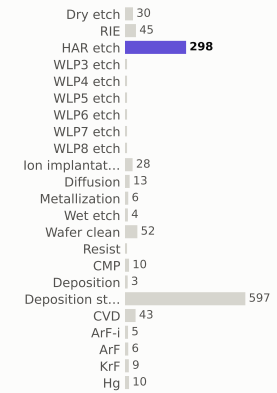

materials deposited (g)

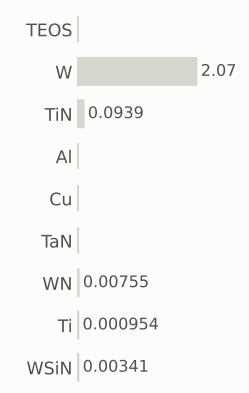

gases emitted (g)

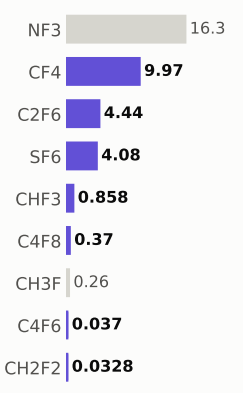

Step #14739.9329: HAR_etch

etch_noop · HAR_etch

1.04	1,617.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

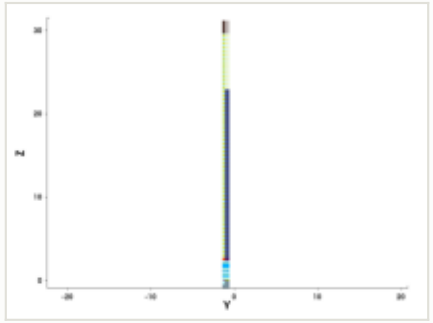

y cut at -1.035 µm

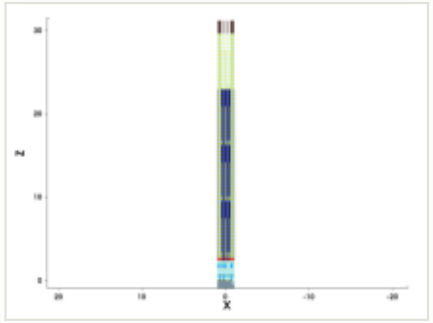

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

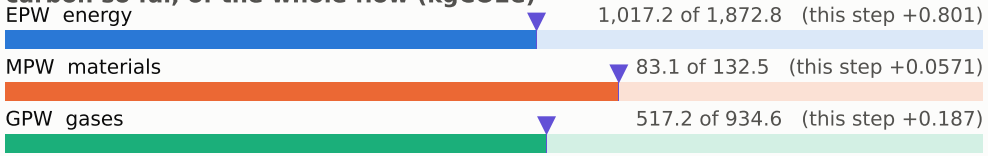

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

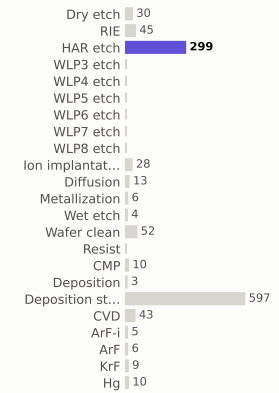

materials deposited (g)

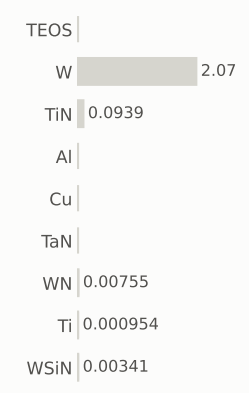

gases emitted (g)

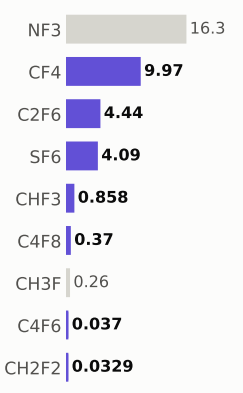

Step #14740: Dry_etch

etch_strip · Dry_etch

0.801	1,618.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

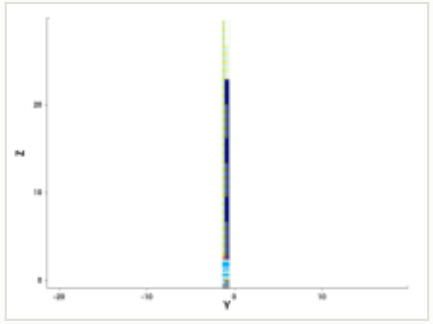

y cut at -1.035 µm

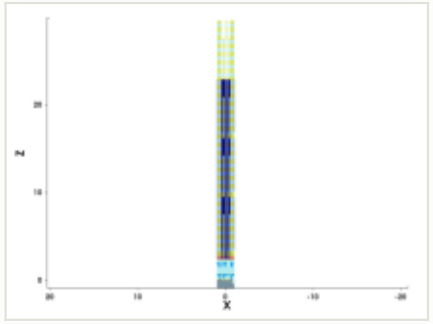

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

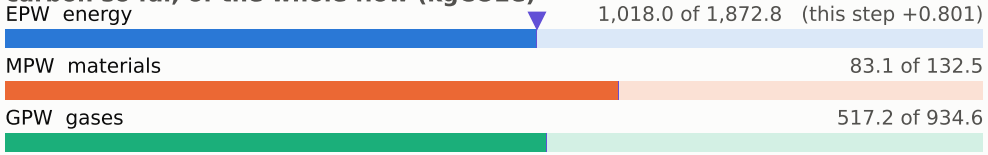

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

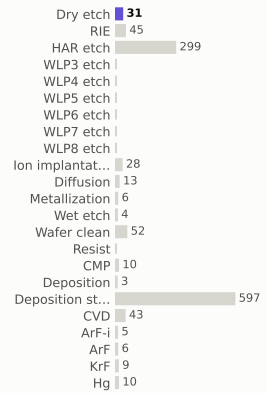

materials deposited (g)



gases emitted (g)

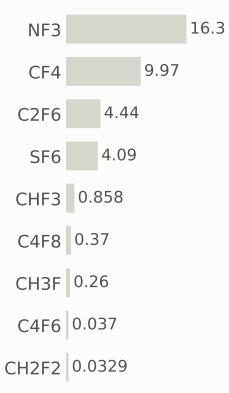

Step #14750: Wafer_clean

clean · Wafer_clean

0.169	1,618.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

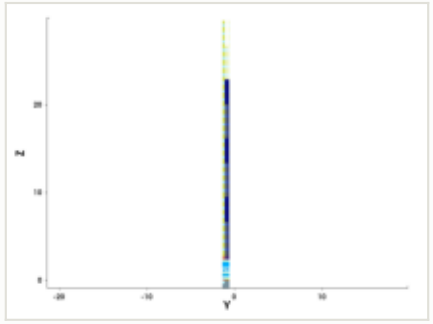

y cut at -1.035 µm

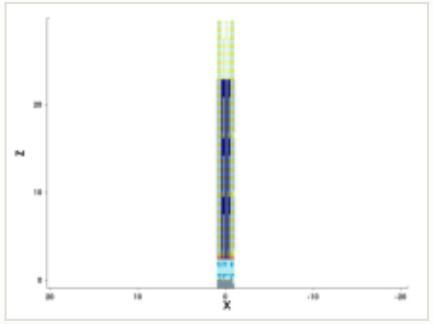

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

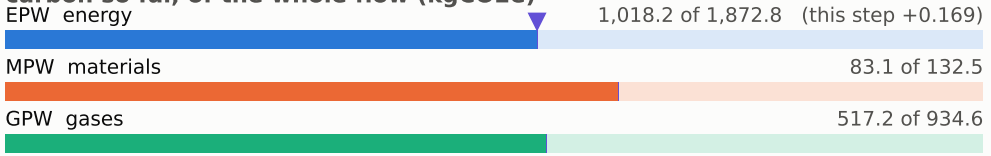

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

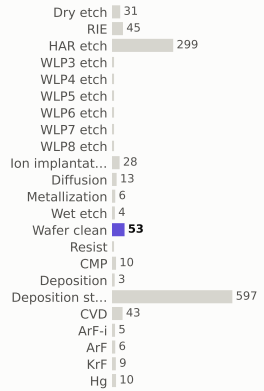

materials deposited (g)

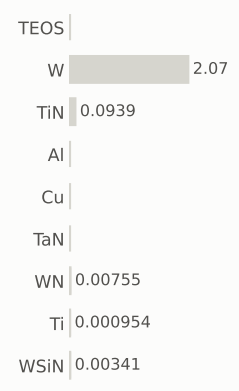

gases emitted (g)

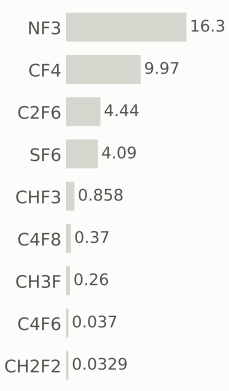

Step #14760: CVD

depo_isotropic · CVD

1.31	1,619.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

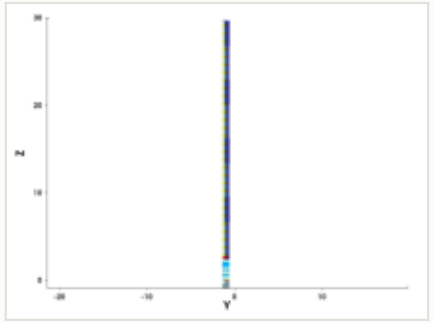

y cut at -1.035 µm

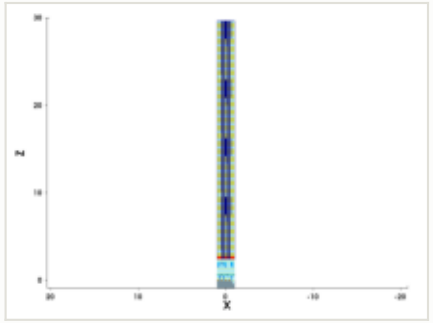

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.07 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0329 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

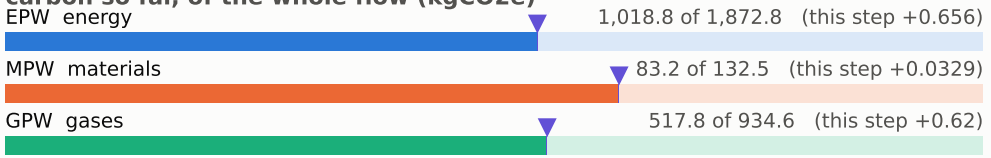

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

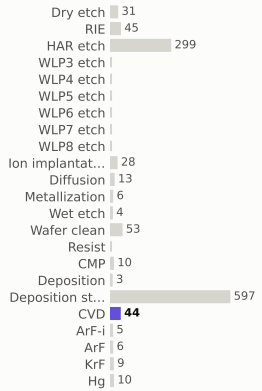

materials deposited (g)

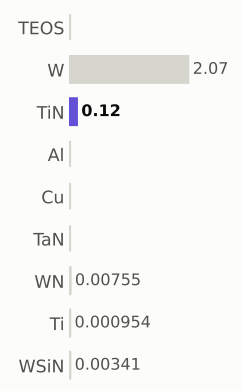

gases emitted (g)

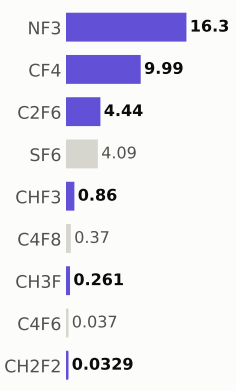

Step #14770: CMP

etch_cmp · CMP

0.169	1,619.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

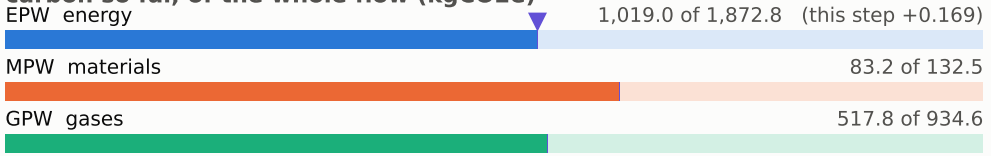

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

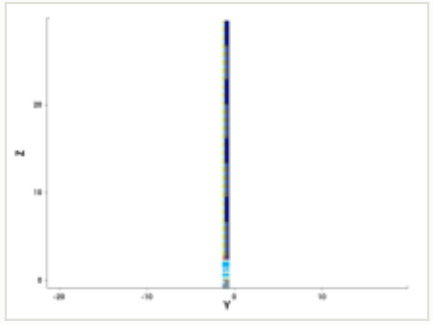

y cut at -1.035 µm

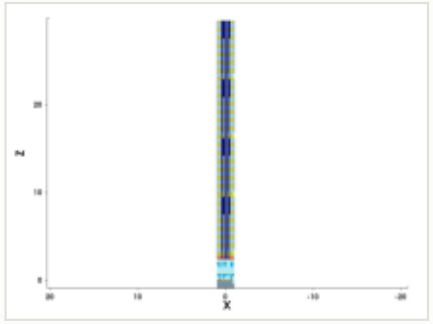

mask for this step

no mask for this step

steps by process area

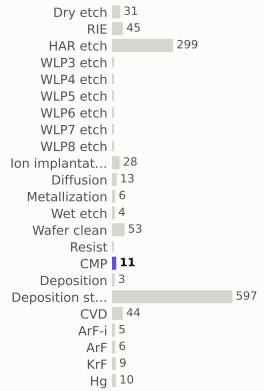

materials deposited (g)

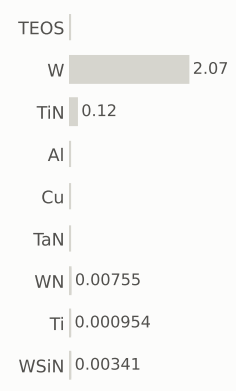

gases emitted (g)

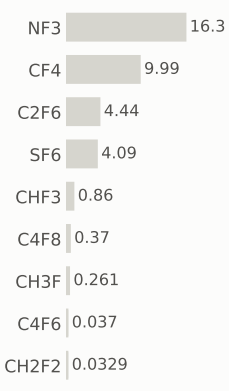

Step #14780: Wafer_clean

clean · Wafer_clean

0.169	1,620.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

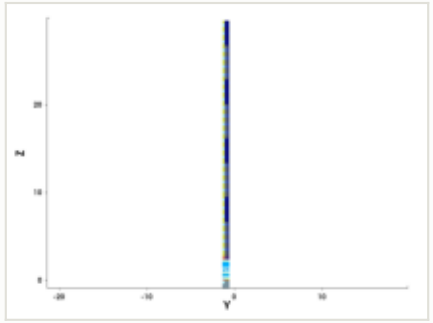

y cut at -1.035 µm

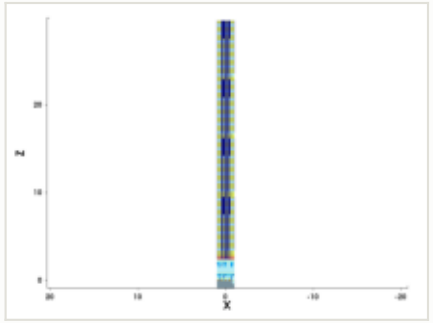

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

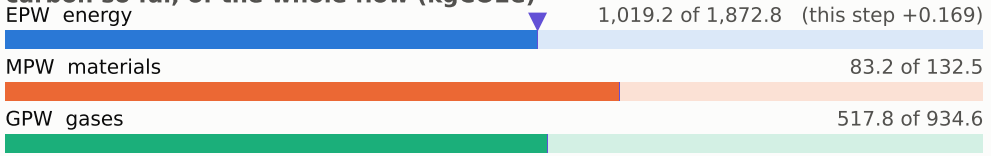

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

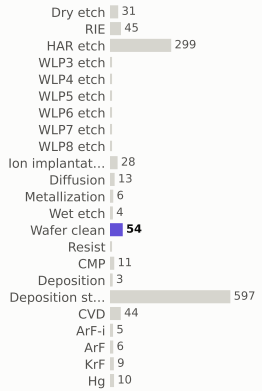

materials deposited (g)

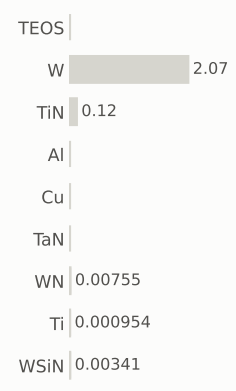

gases emitted (g)

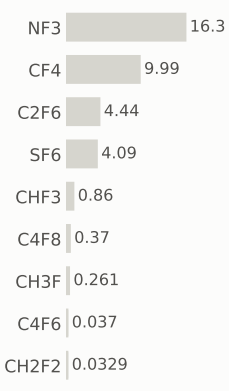

Step #14790: Wafer_clean

clean · Wafer_clean

0.169	1,620.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

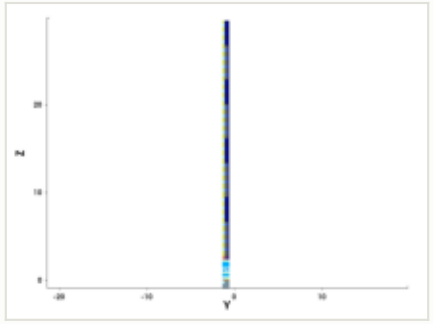

y cut at -1.035 µm

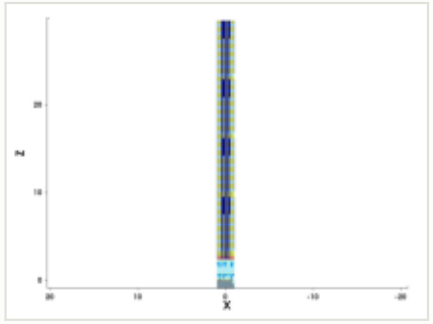

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

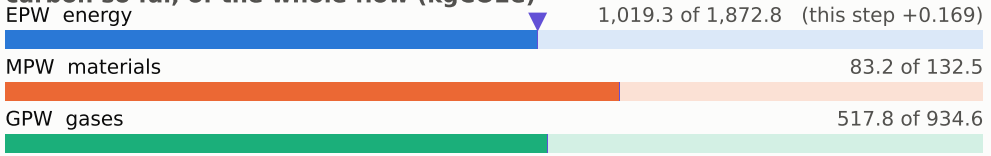

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

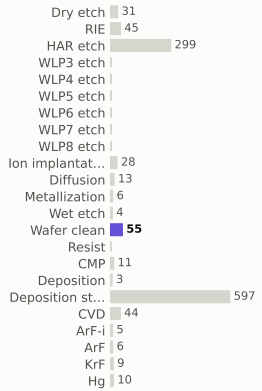

materials deposited (g)

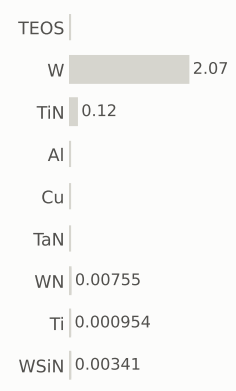

gases emitted (g)

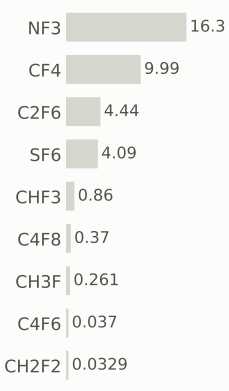

Step #14800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,620.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

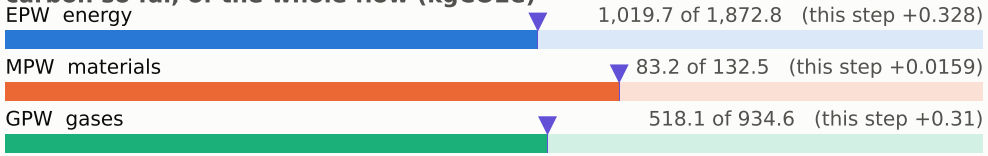

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

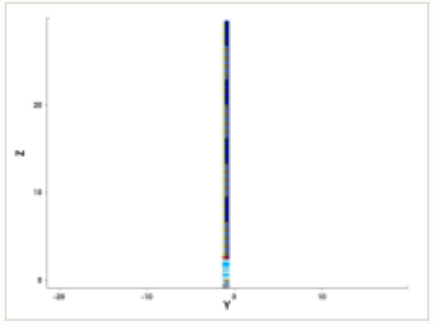

y cut at -1.035 µm

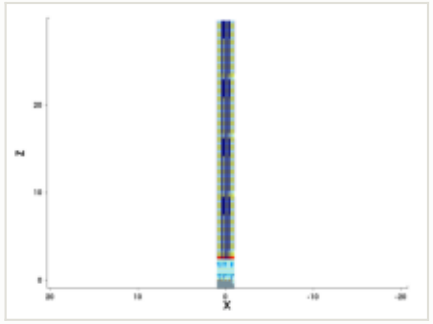

mask for this step

no mask for this step

steps by process area

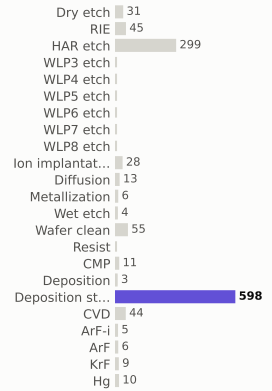

materials deposited (g)

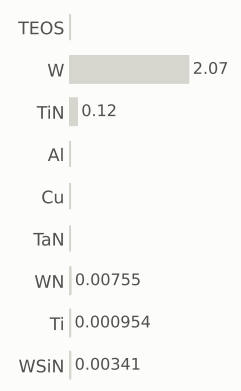

gases emitted (g)

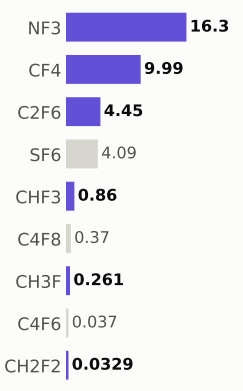

Step #14810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,621.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

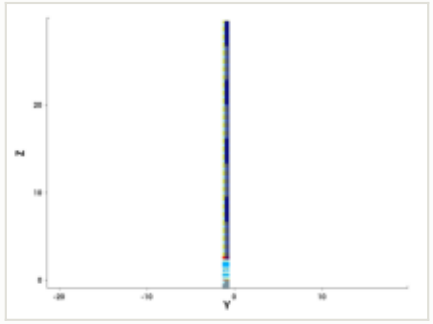

y cut at -1.035 µm

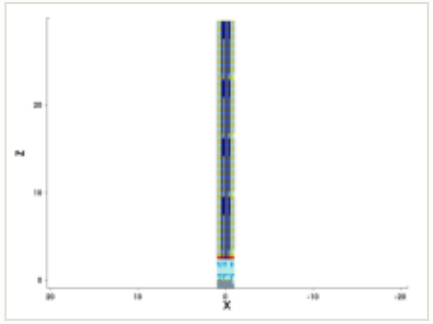

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 1,020.0 of 1,872.8 (this step +0.328)

MPW materials — 83.2 of 132.5 (this step +0.0159)

GPW gases — 518.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

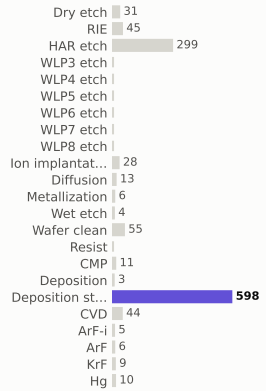

materials deposited (g)

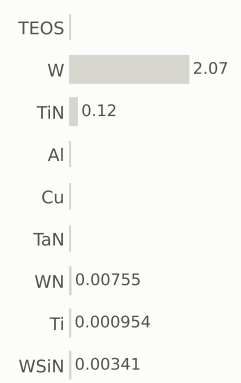

gases emitted (g)

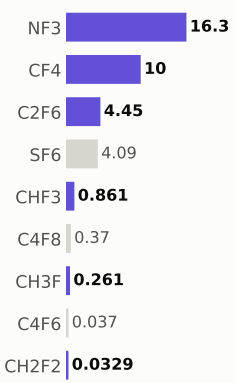

Step #14820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,622.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

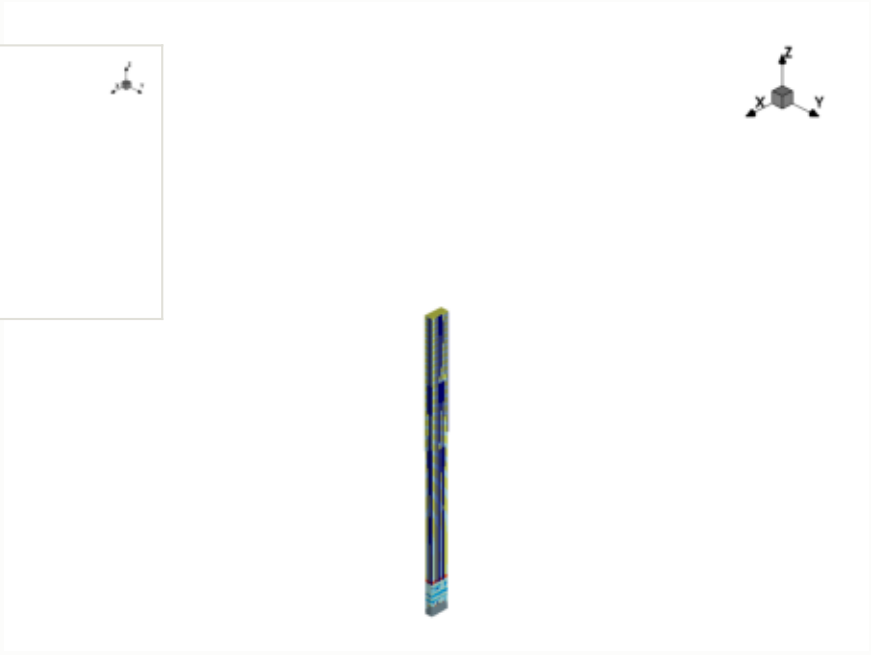

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

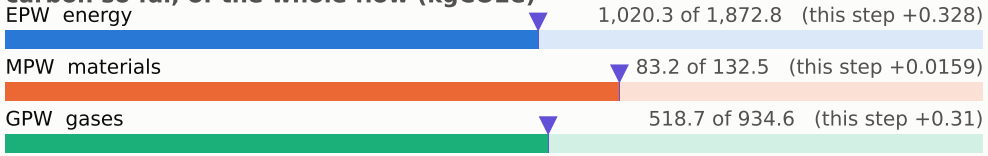

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

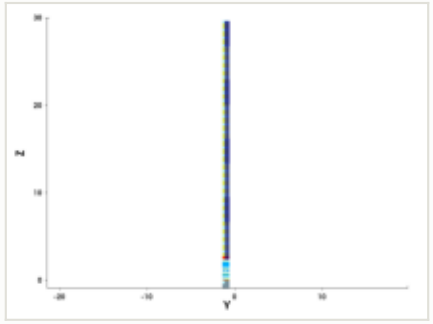

y cut at -1.035 µm

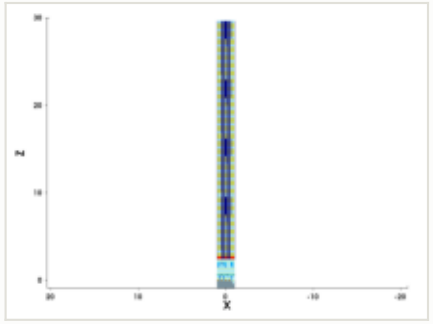

mask for this step

no mask for this step

steps by process area

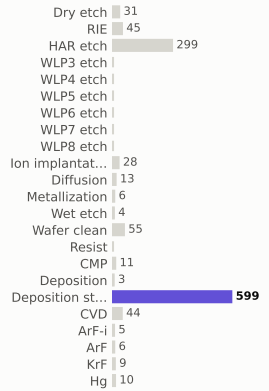

materials deposited (g)

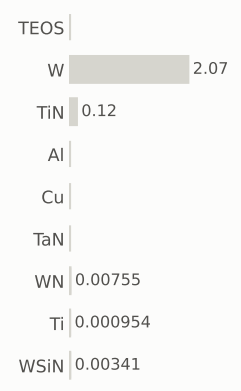

gases emitted (g)

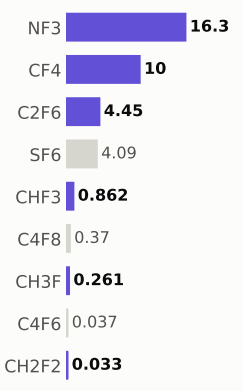

Step #14830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,622.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

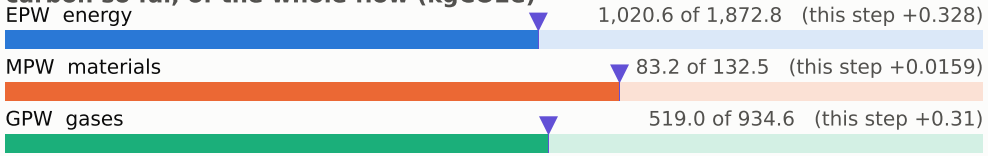

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

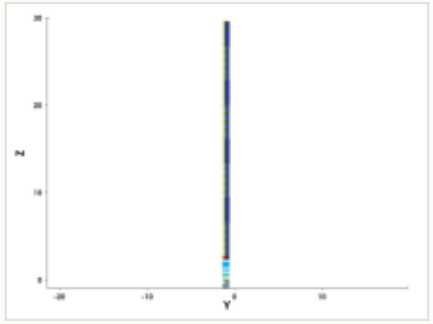

y cut at -1.035 µm

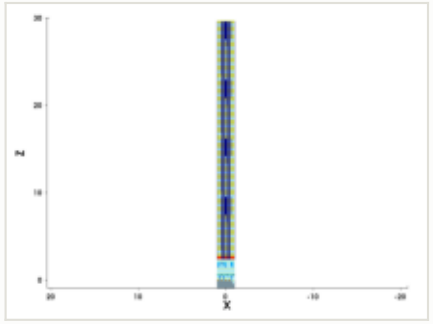

mask for this step

no mask for this step

steps by process area

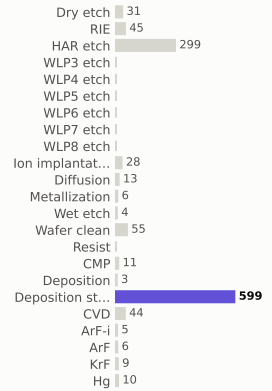

materials deposited (g)

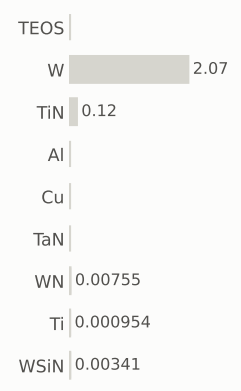

gases emitted (g)

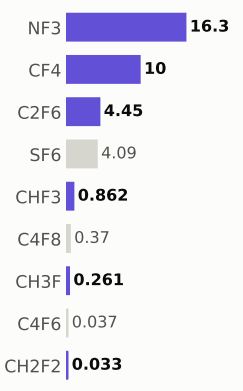

Step #14840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,623.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

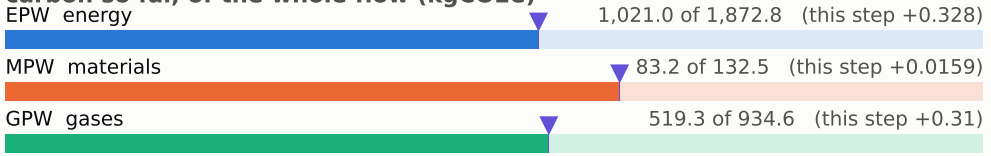

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

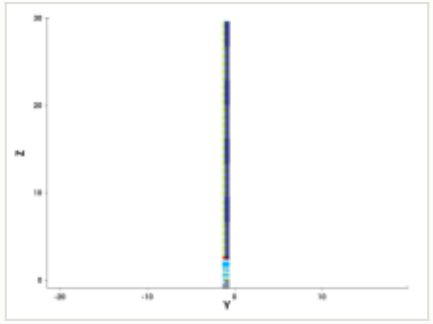

y cut at -1.035 µm

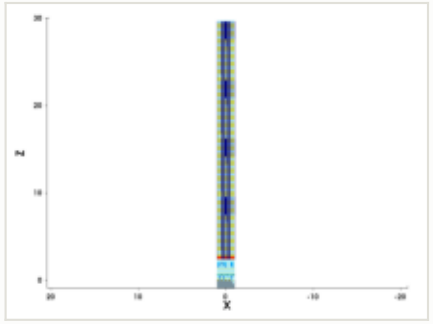

mask for this step

no mask for this step

steps by process area

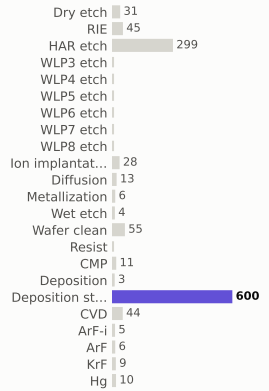

materials deposited (g)

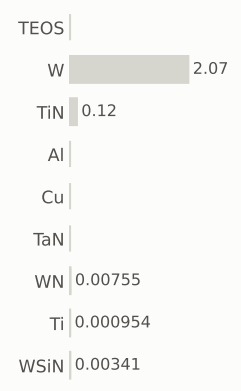

gases emitted (g)

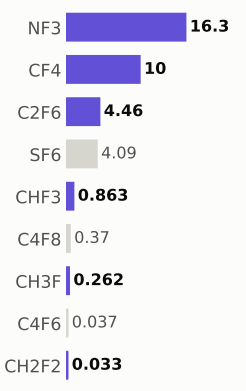

Step #14850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,624.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

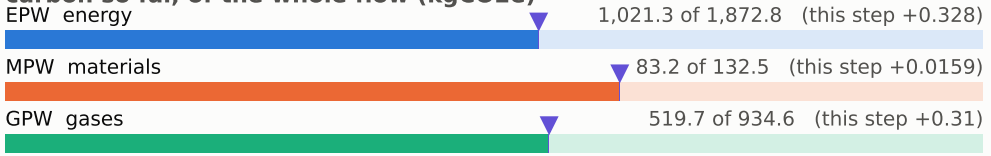

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

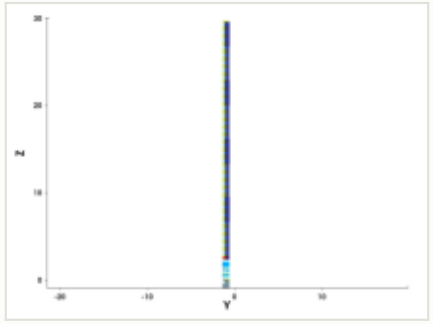

y cut at -1.035 µm

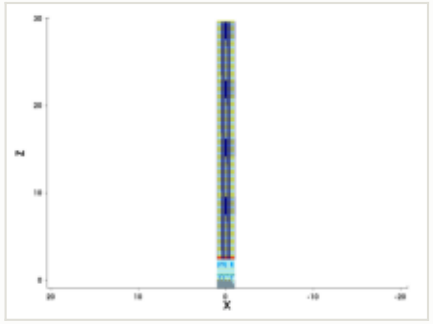

mask for this step

no mask for this step

steps by process area

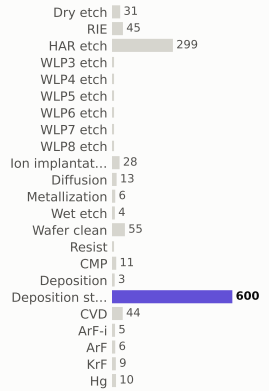

materials deposited (g)

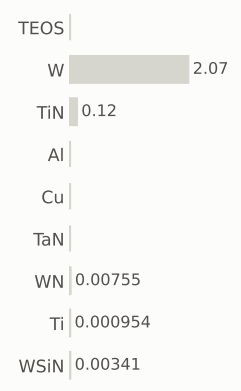

gases emitted (g)

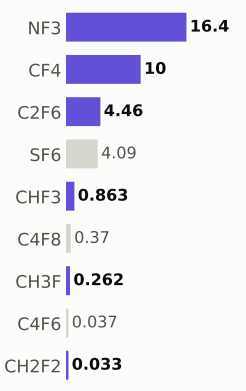

Step #14860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,624.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

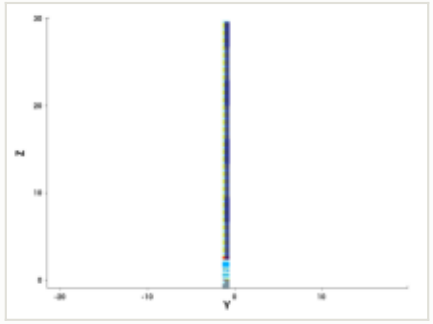

y cut at -1.035 µm

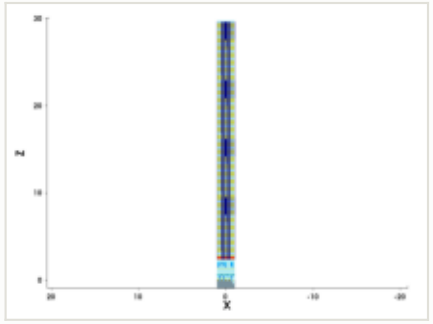

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

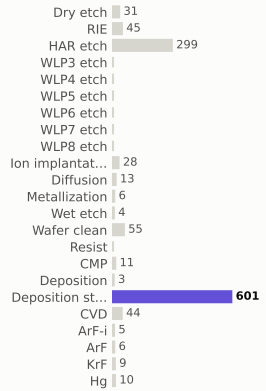

materials deposited (g)

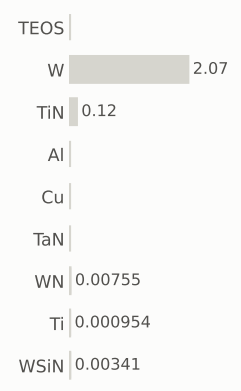

gases emitted (g)

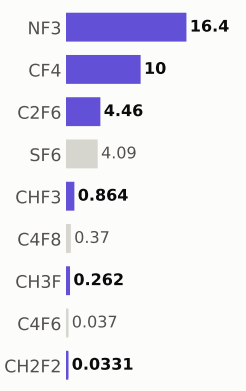

Step #14870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,625.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

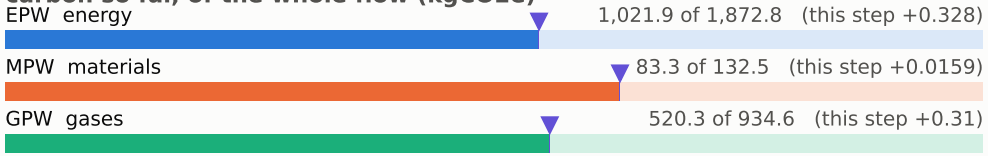

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

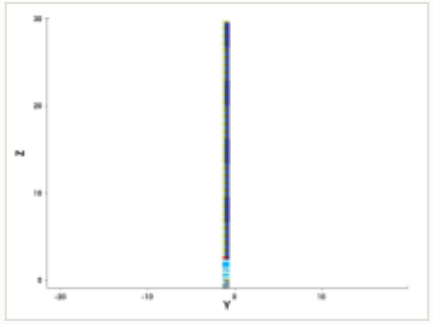

y cut at -1.035 µm

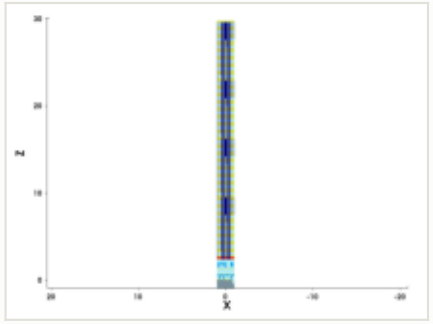

mask for this step

no mask for this step

steps by process area

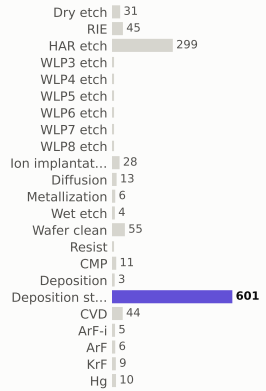

materials deposited (g)

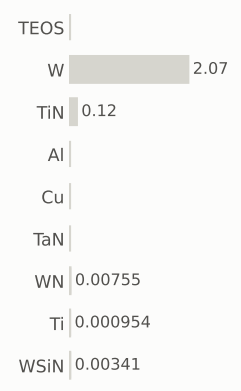

gases emitted (g)

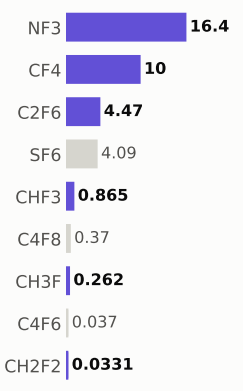

Step #14880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,626.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

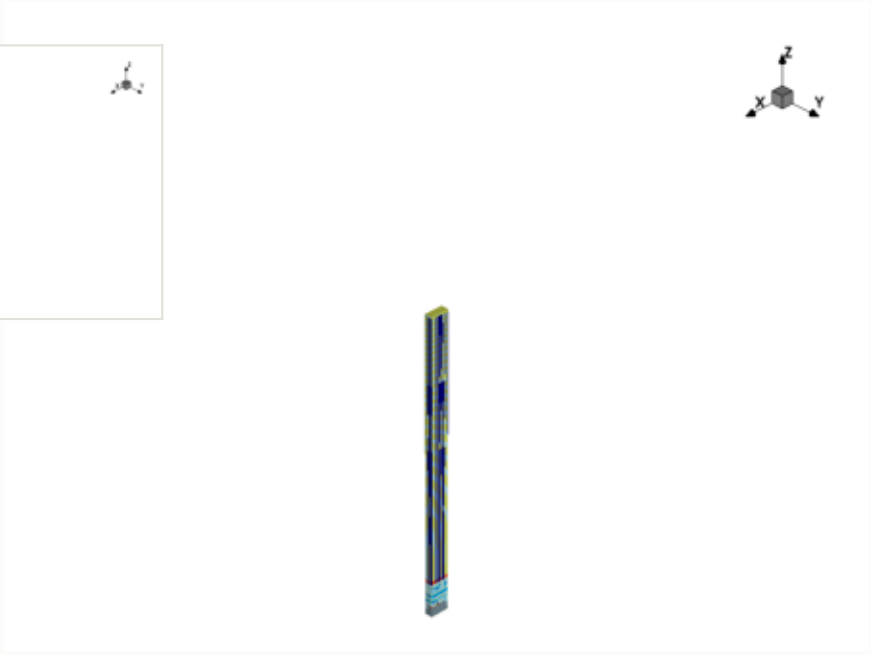

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

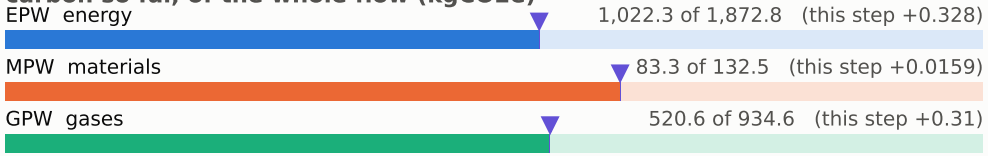

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

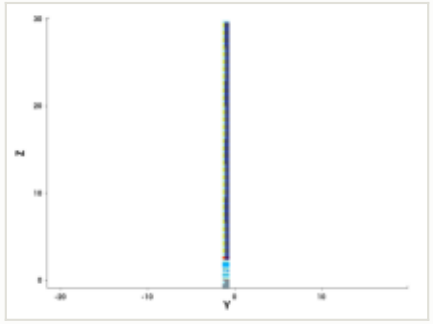

y cut at -1.035 µm

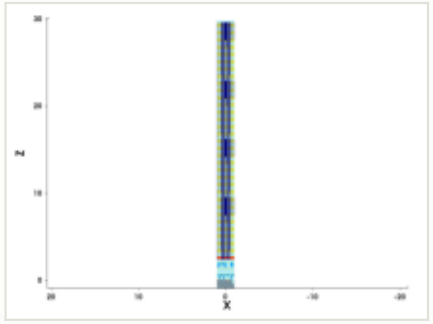

mask for this step

no mask for this step

steps by process area

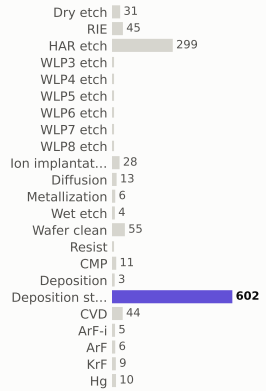

materials deposited (g)

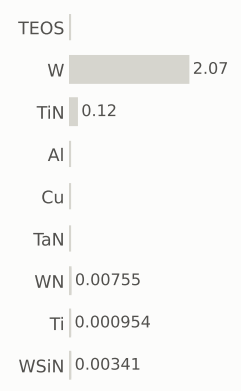

gases emitted (g)

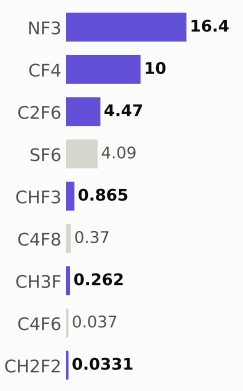

Step #14890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,626.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

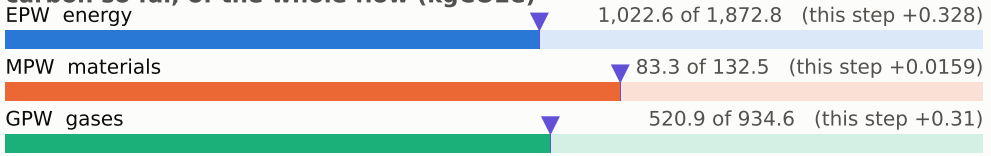

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

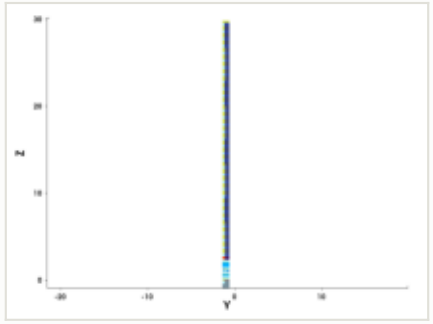

y cut at -1.035 µm

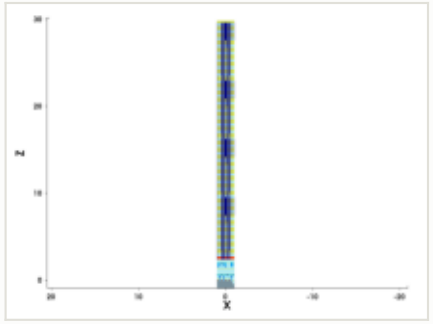

mask for this step

no mask for this step

steps by process area

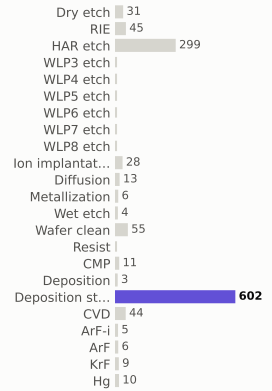

materials deposited (g)

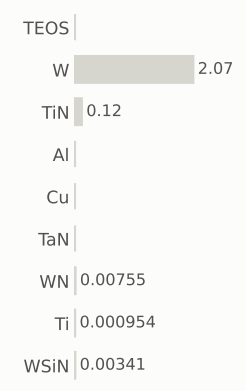

gases emitted (g)

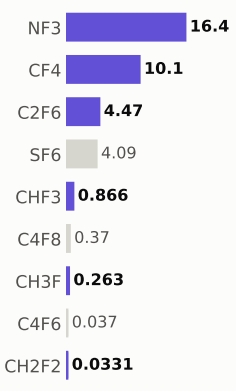

Step #14900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,627.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

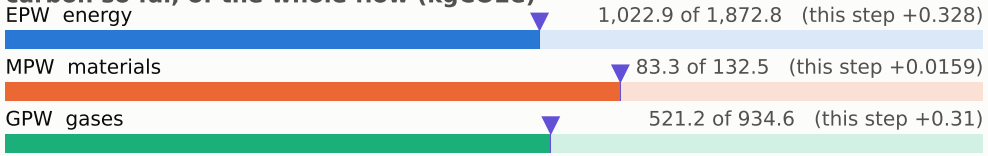

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

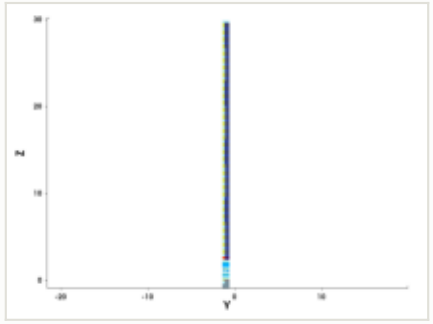

y cut at -1.035 µm

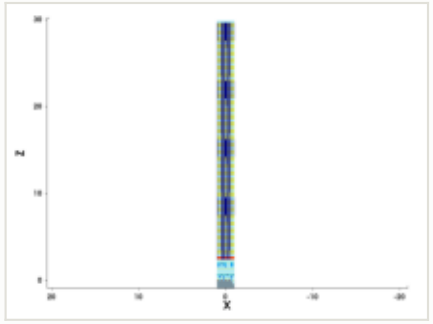

mask for this step

no mask for this step

steps by process area

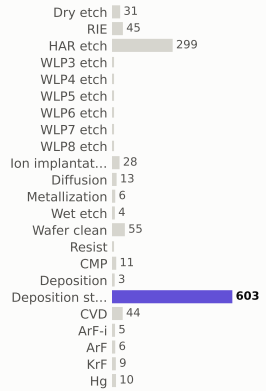

materials deposited (g)

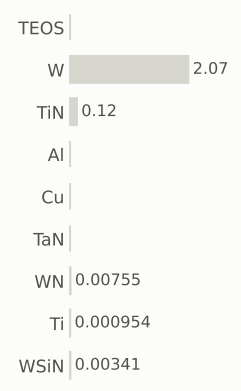

gases emitted (g)

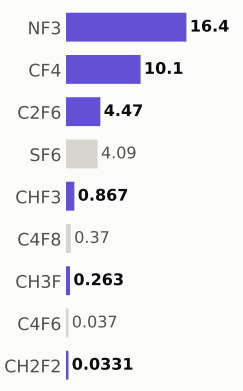

Step #14910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,628.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

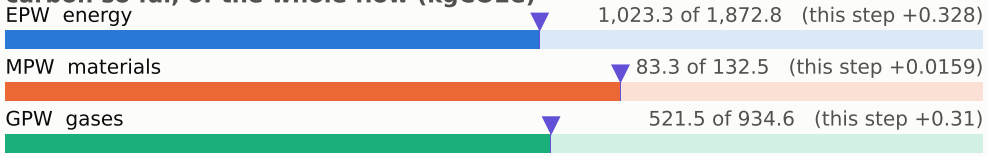

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

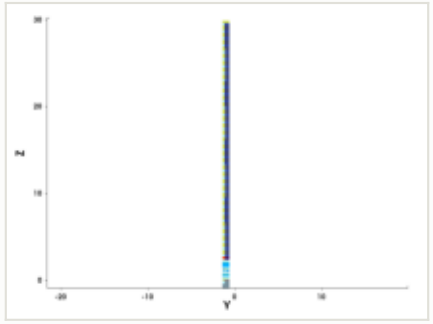

y cut at -1.035 µm

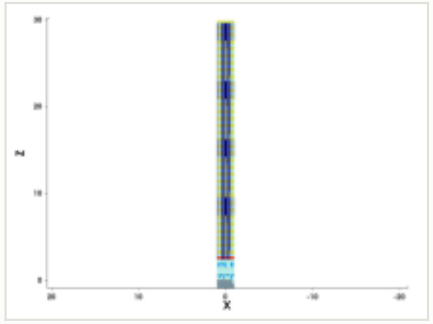

mask for this step

no mask for this step

steps by process area

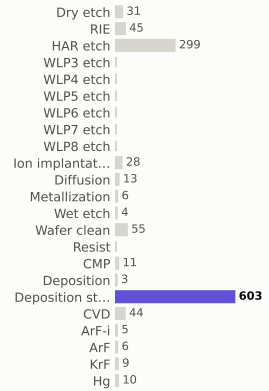

materials deposited (g)

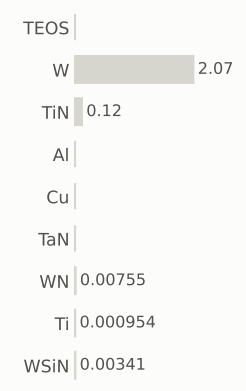

gases emitted (g)

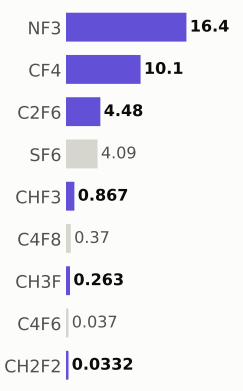

Step #14920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,628.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

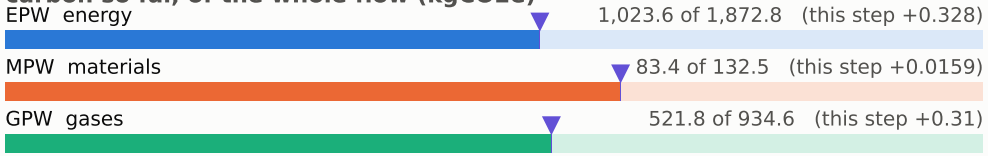

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

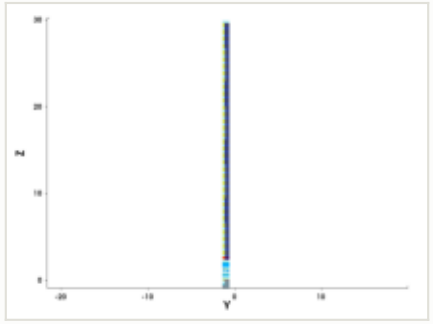

y cut at -1.035 µm

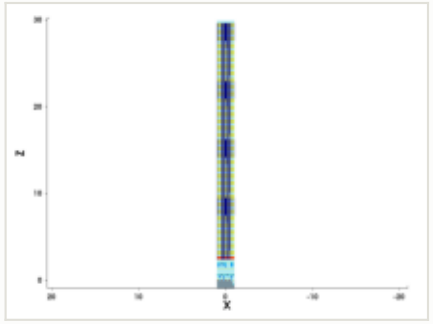

mask for this step

no mask for this step

steps by process area

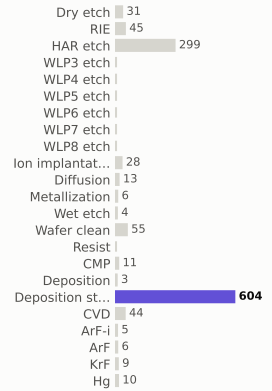

materials deposited (g)

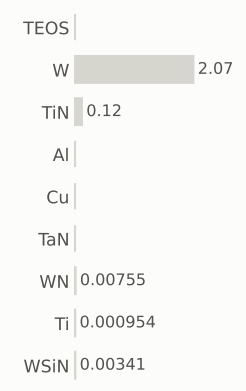

gases emitted (g)

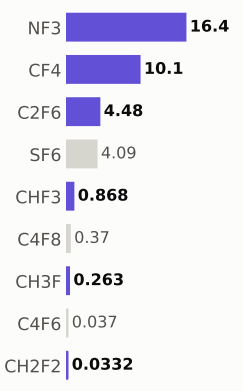

Step #14930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,629.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

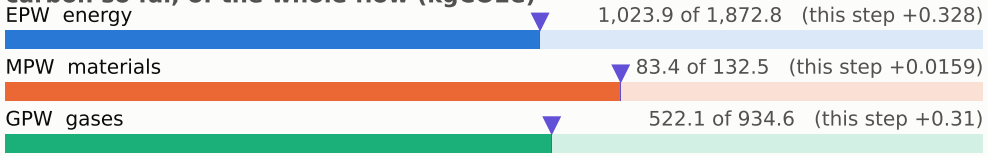

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

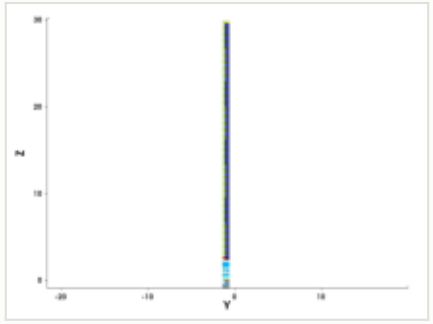

y cut at -1.035 µm

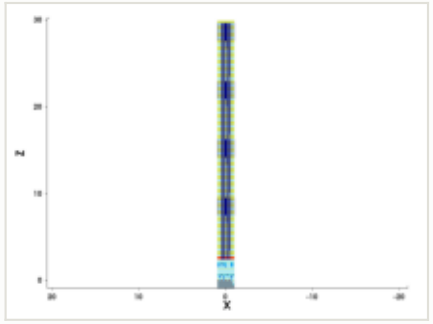

mask for this step

no mask for this step

steps by process area

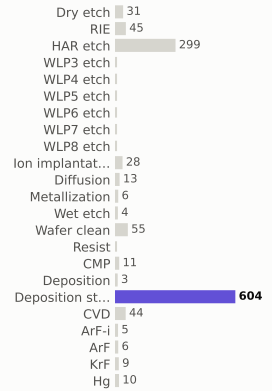

materials deposited (g)

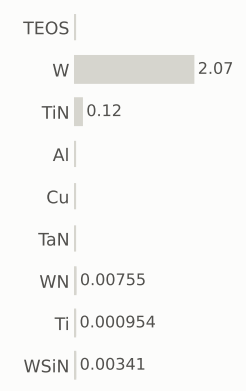

gases emitted (g)

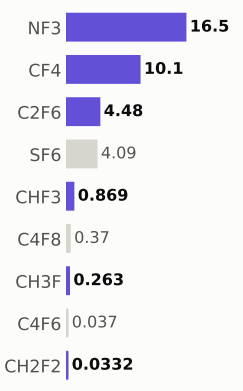

Step #14940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,630.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

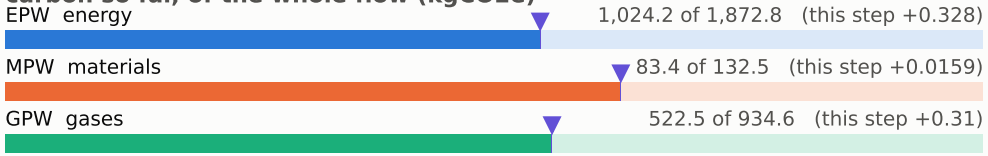

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

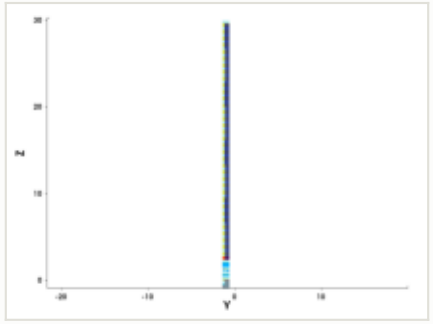

y cut at -1.035 µm

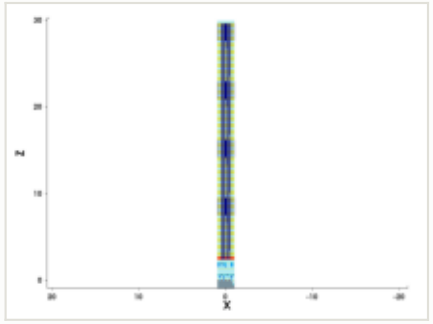

mask for this step

no mask for this step

steps by process area

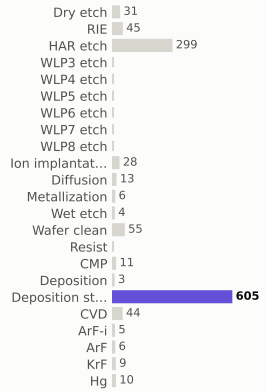

materials deposited (g)

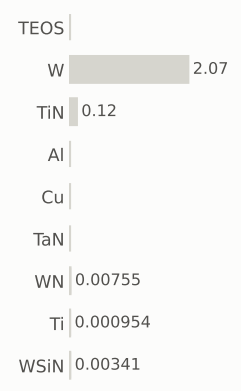

gases emitted (g)

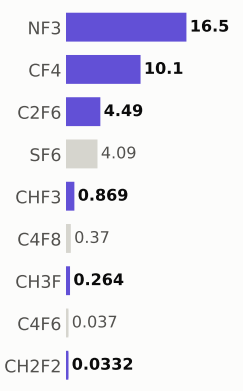

Step #14950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,630.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

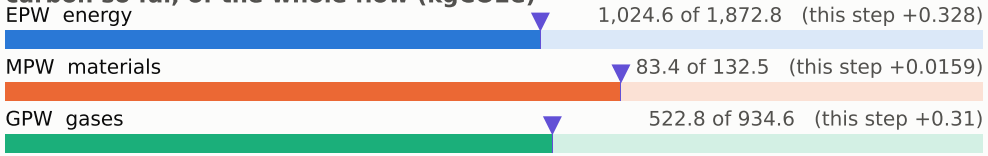

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

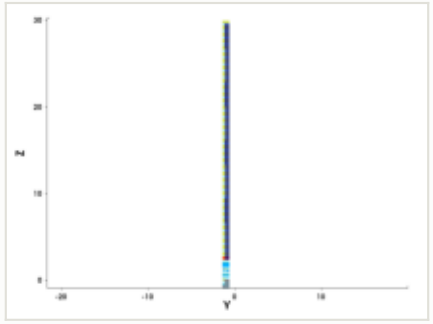

y cut at -1.035 µm

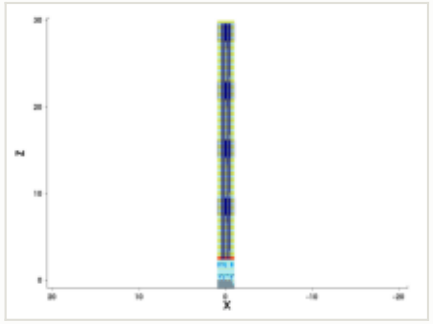

mask for this step

no mask for this step

steps by process area

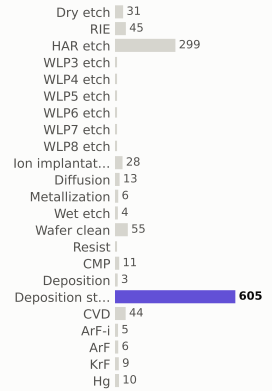

materials deposited (g)

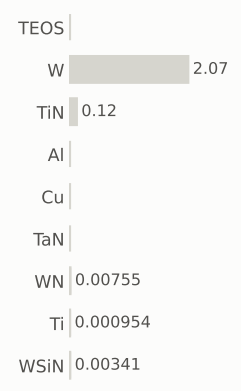

gases emitted (g)

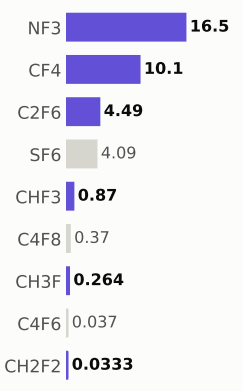

Step #14960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,631.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

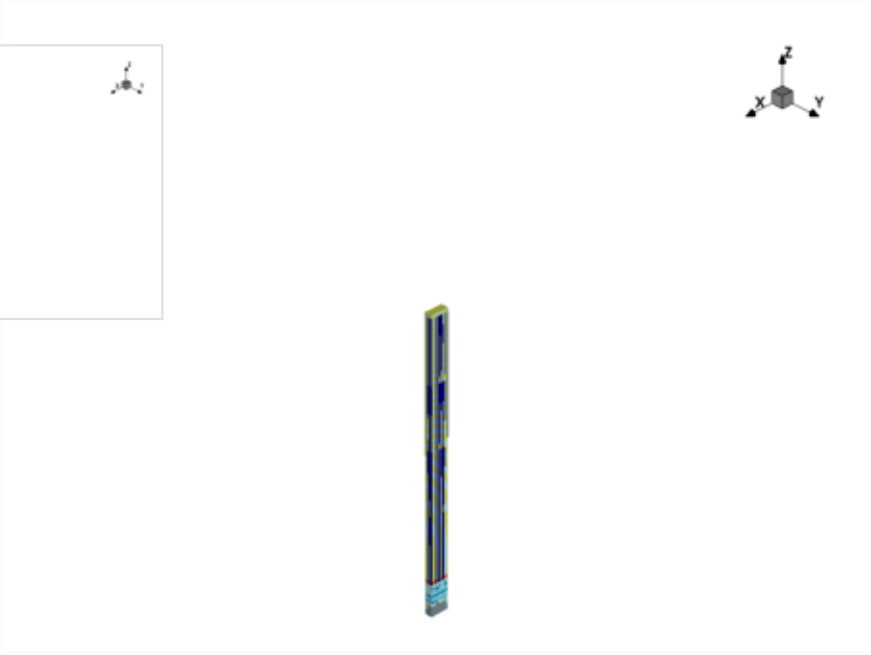

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

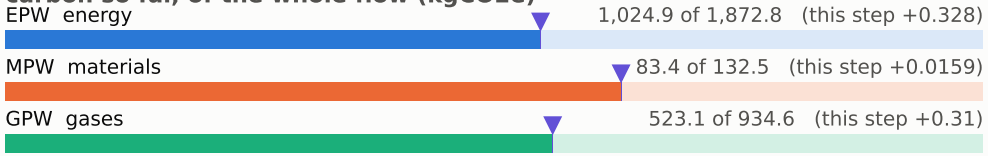

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

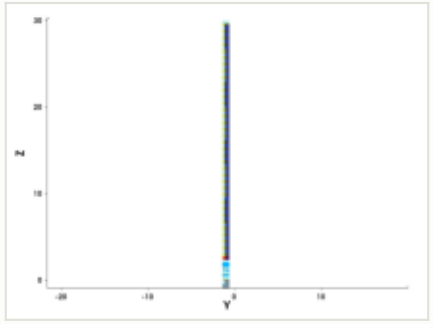

y cut at -1.035 µm

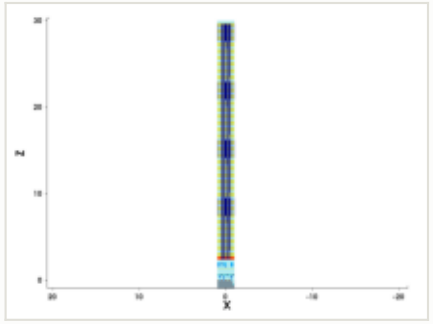

mask for this step

no mask for this step

steps by process area

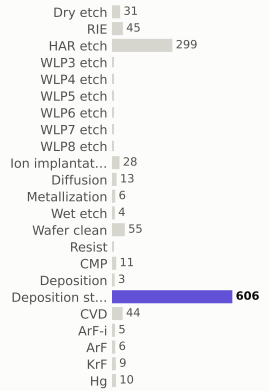

materials deposited (g)

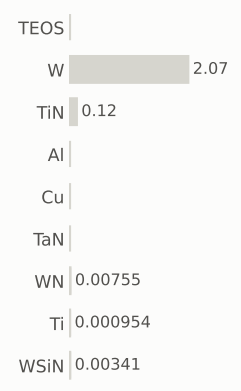

gases emitted (g)

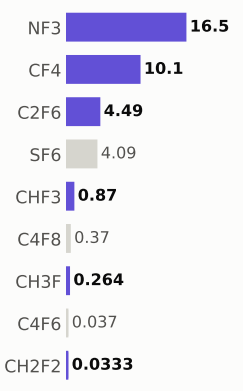

Step #14970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,632.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

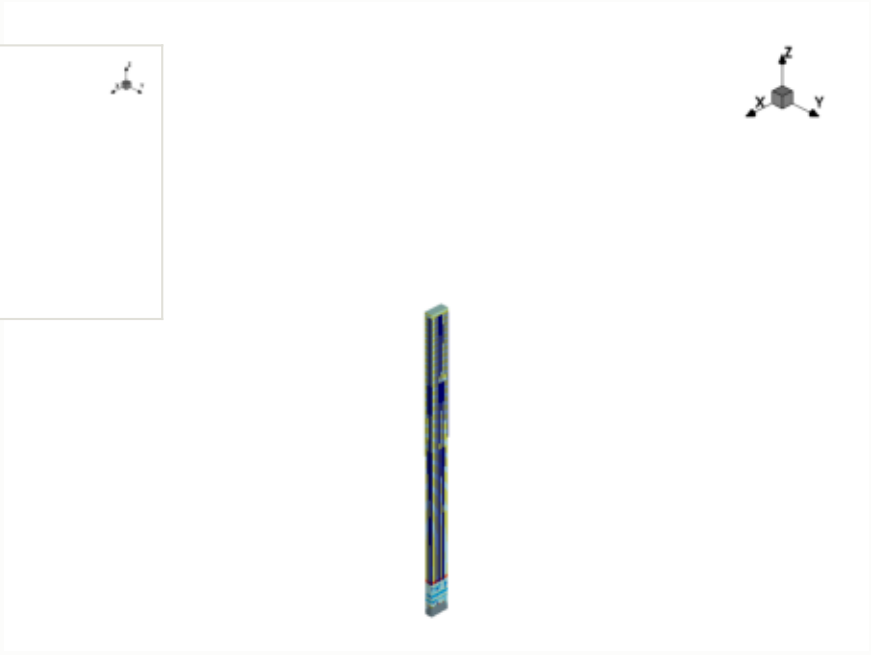

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

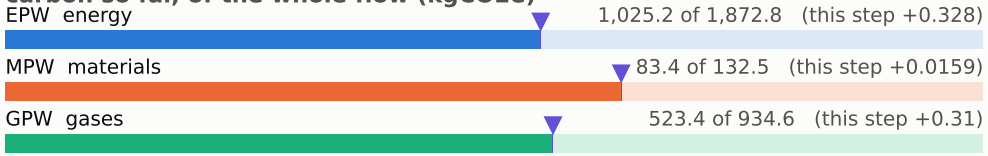

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

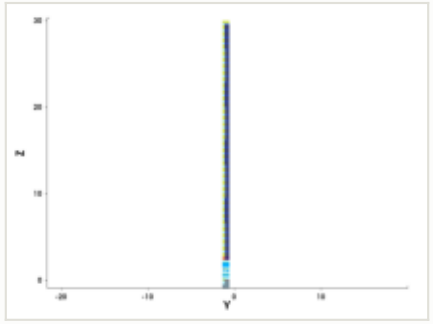

y cut at -1.035 µm

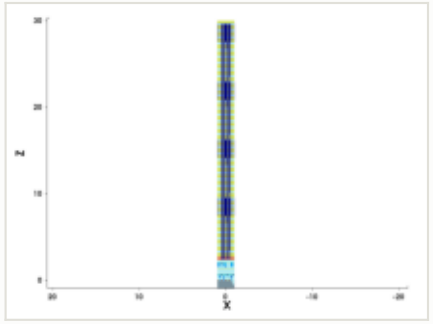

mask for this step

no mask for this step

steps by process area

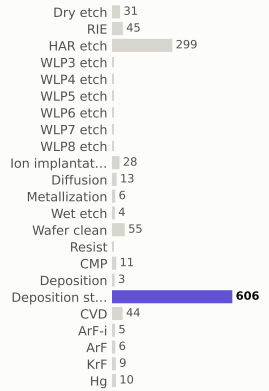

materials deposited (g)

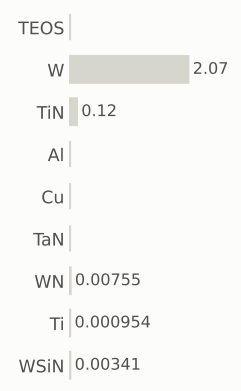

gases emitted (g)

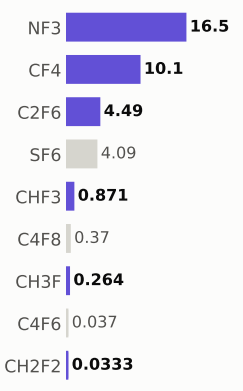

Step #14980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,632.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

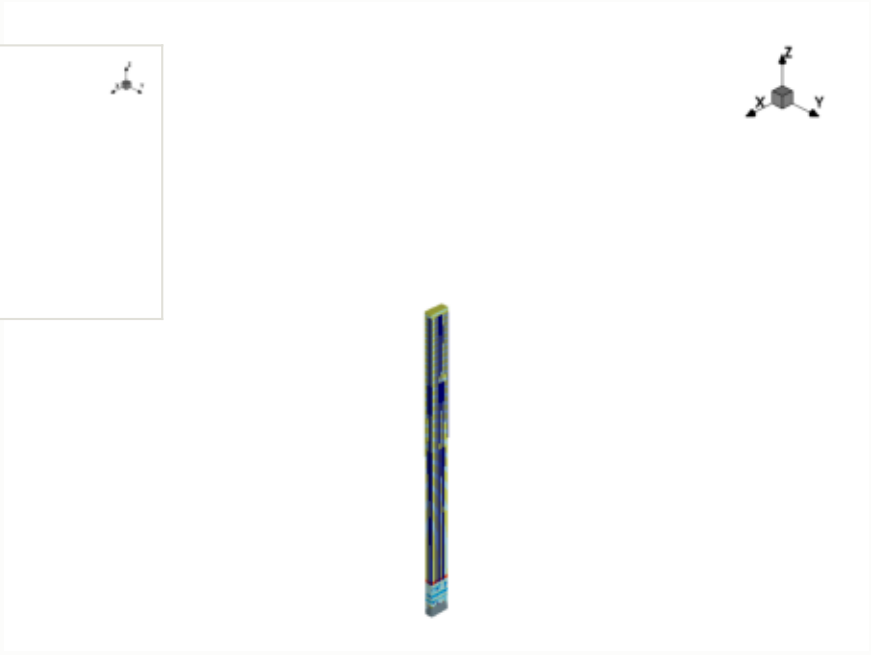

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

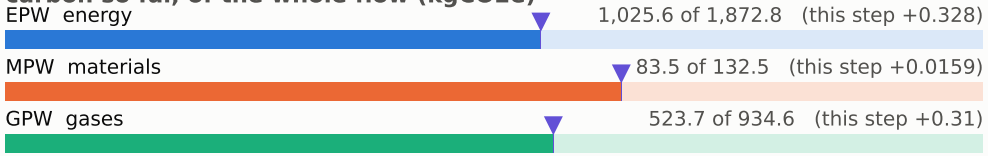

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

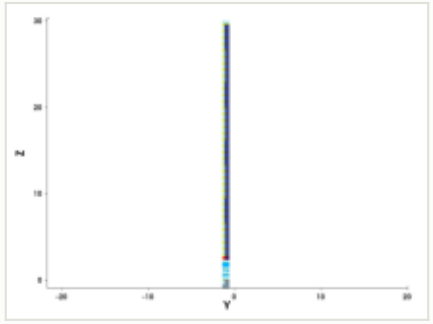

y cut at -1.035 µm

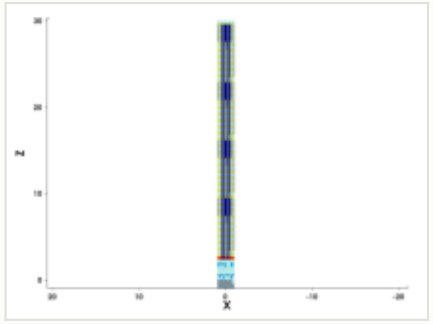

mask for this step

no mask for this step

steps by process area

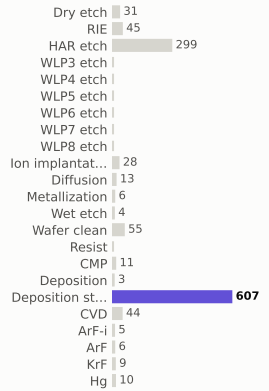

materials deposited (g)

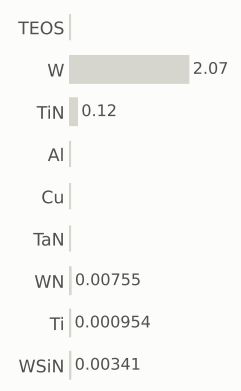

gases emitted (g)

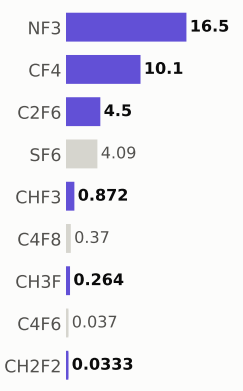

Step #14990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,633.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

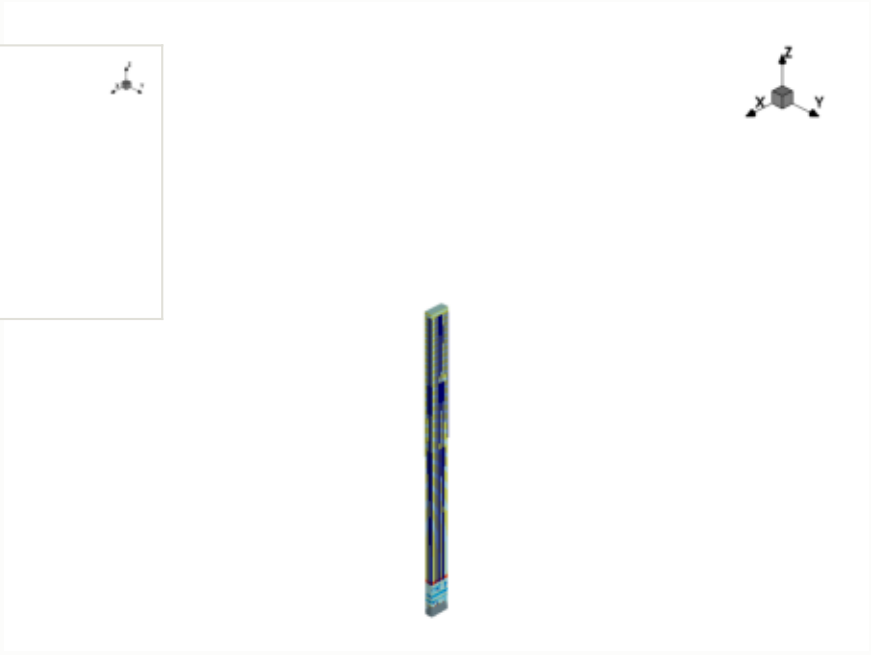

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

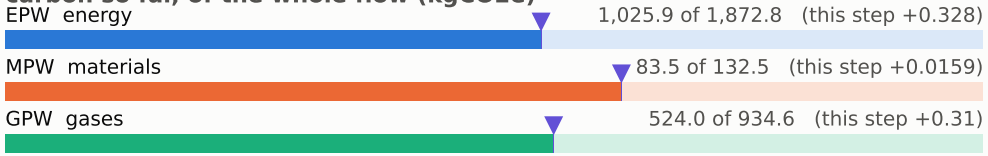

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

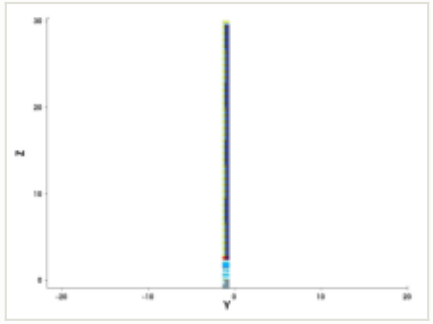

y cut at -1.035 µm

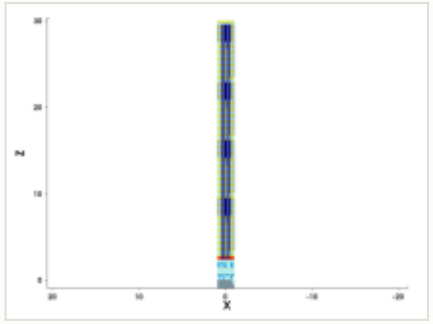

mask for this step

no mask for this step

steps by process area

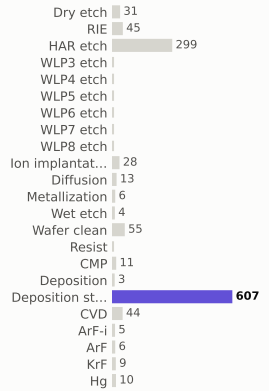

materials deposited (g)

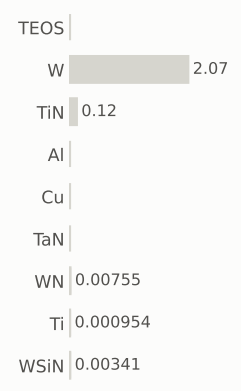

gases emitted (g)

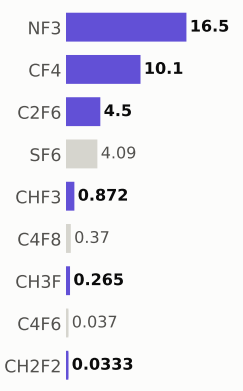

Step #15000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,634.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

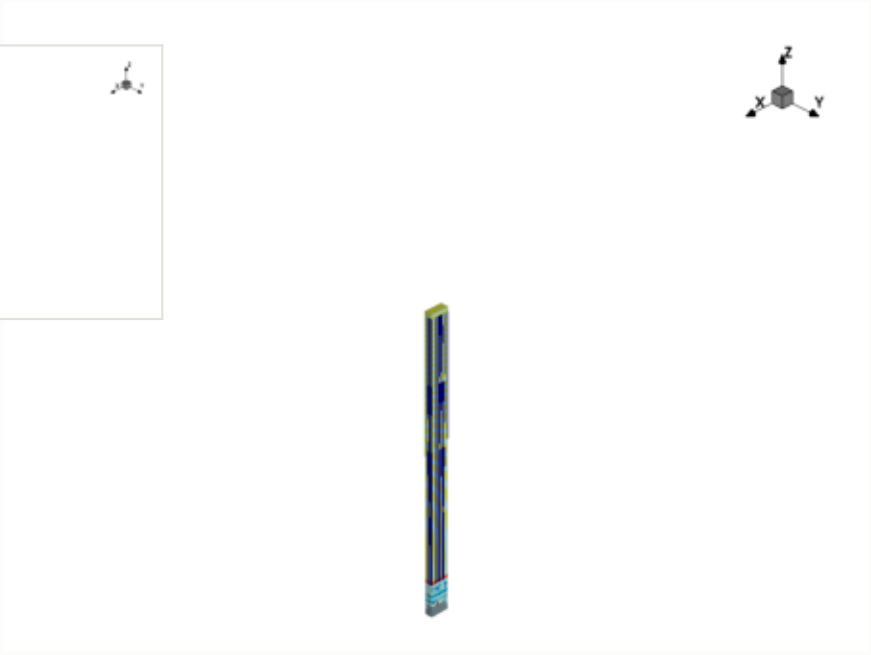

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

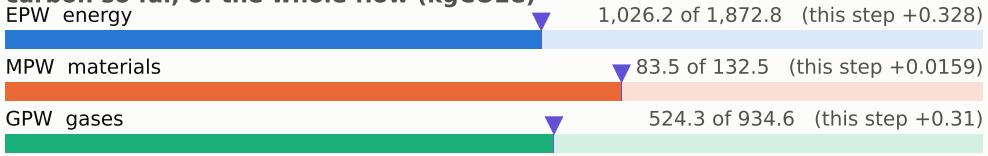

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

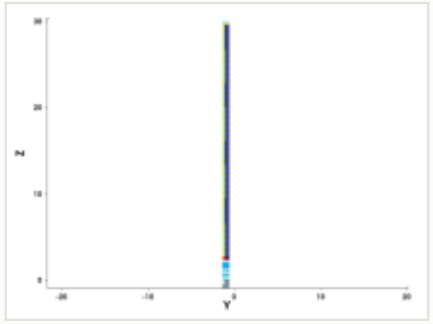

y cut at -1.035 µm

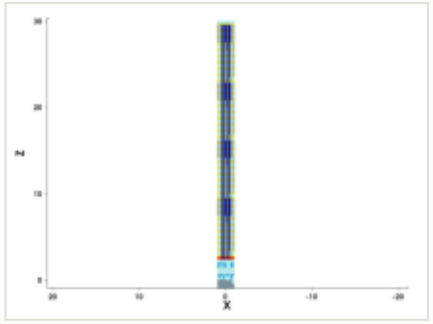

mask for this step

no mask for this step

steps by process area

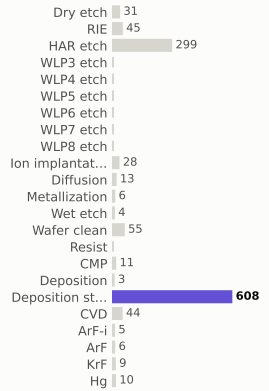

materials deposited (g)

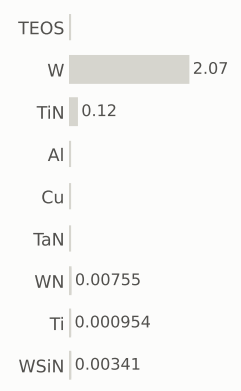

gases emitted (g)

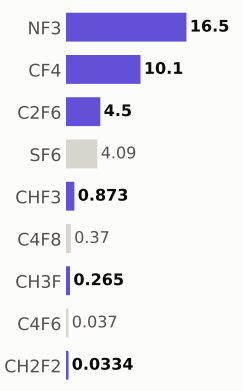

Step #15010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,634.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

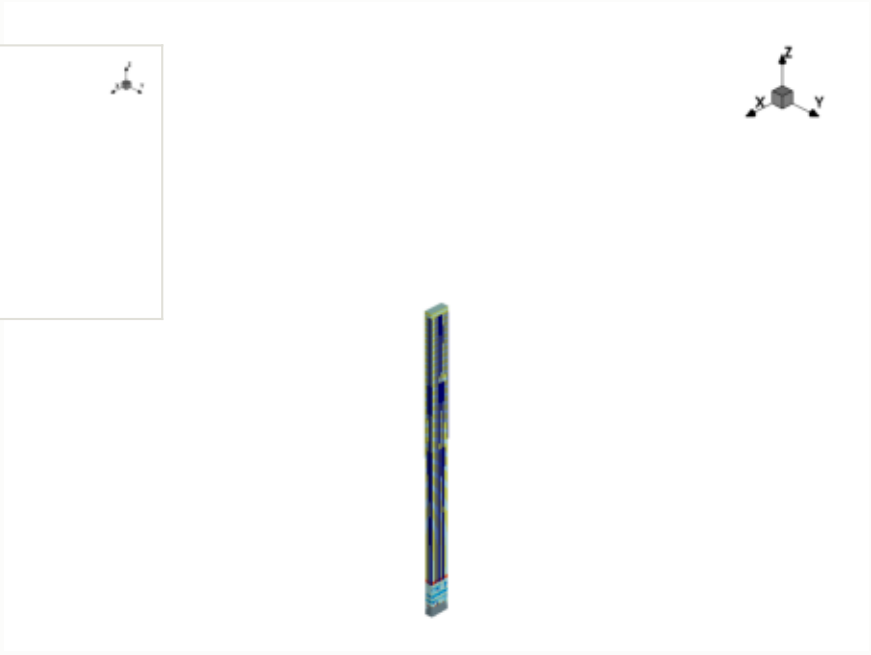

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

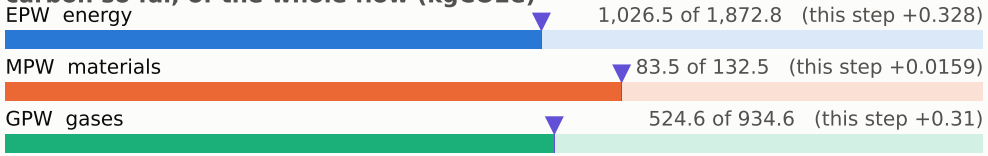

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

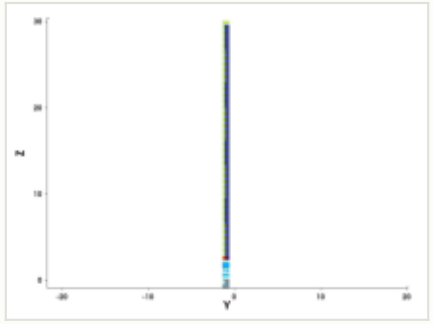

y cut at -1.035 µm

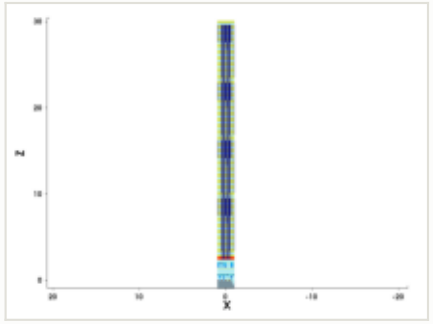

mask for this step

no mask for this step

steps by process area

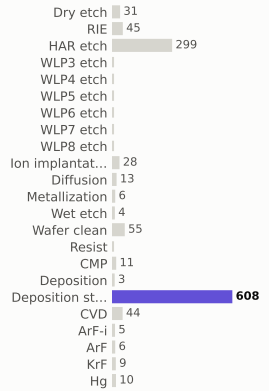

materials deposited (g)

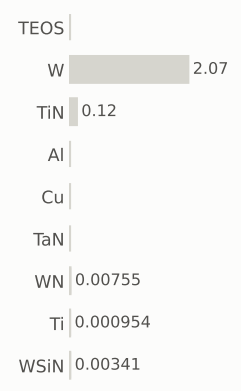

gases emitted (g)

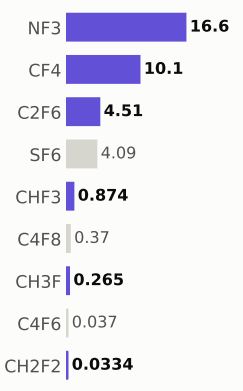

Step #15020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,635.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

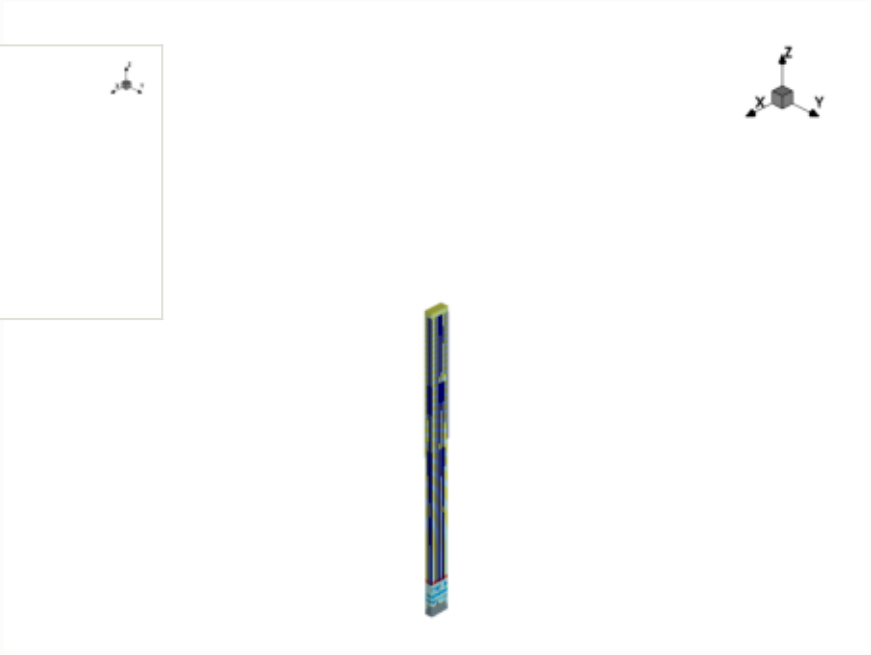

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

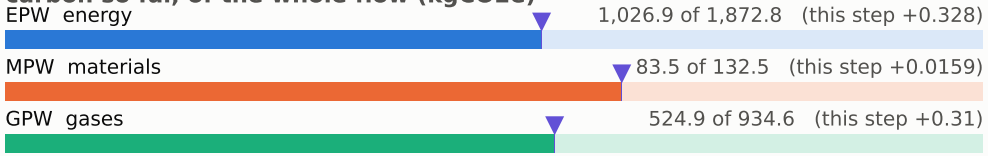

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

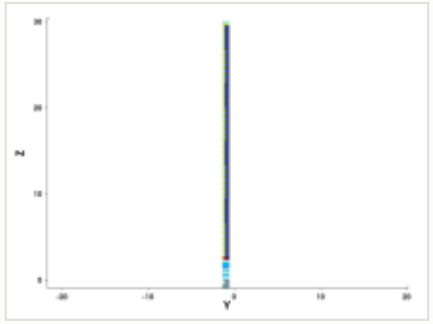

y cut at -1.035 µm

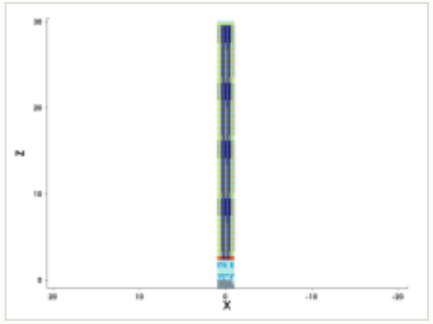

mask for this step

no mask for this step

steps by process area

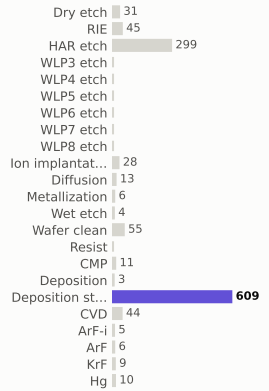

materials deposited (g)

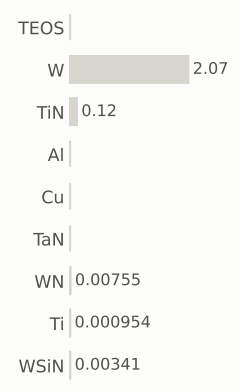

gases emitted (g)

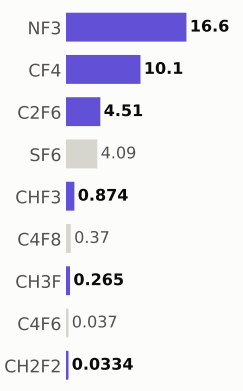

Step #15030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,636.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

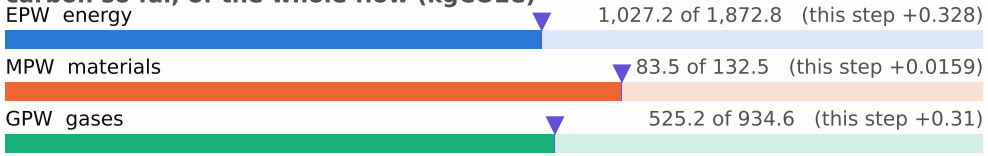

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

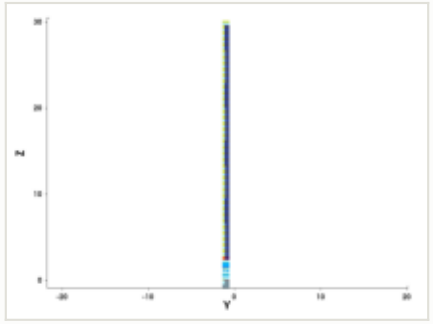

y cut at -1.035 µm

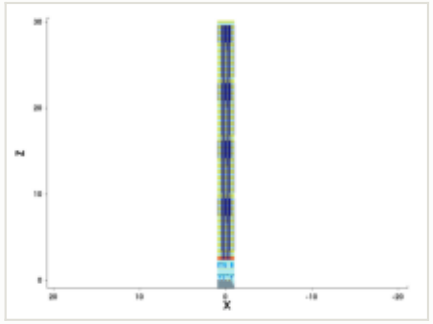

mask for this step

no mask for this step

steps by process area

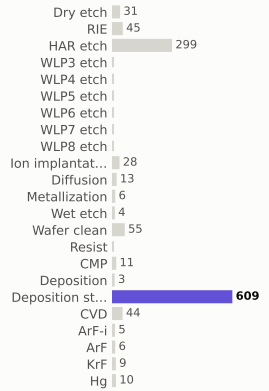

materials deposited (g)

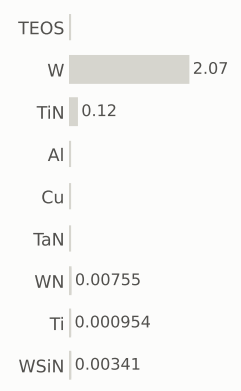

gases emitted (g)

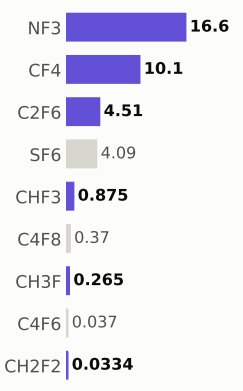

Step #15040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,636.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

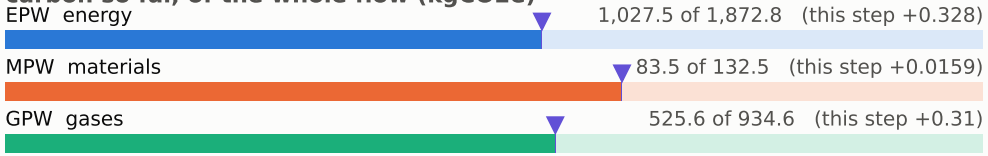

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

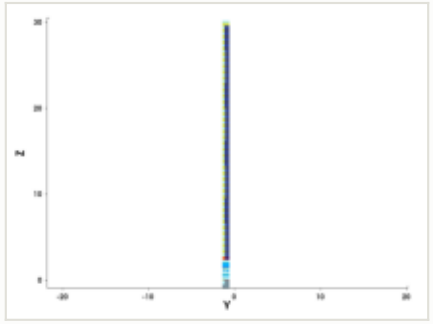

y cut at -1.035 µm

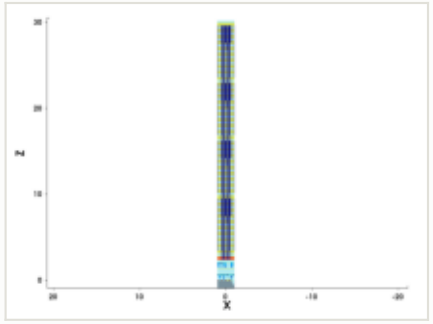

mask for this step

no mask for this step

steps by process area

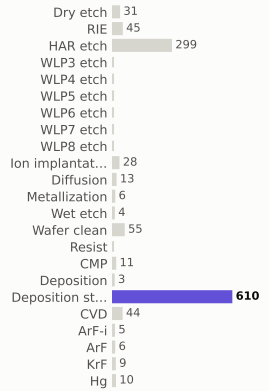

materials deposited (g)

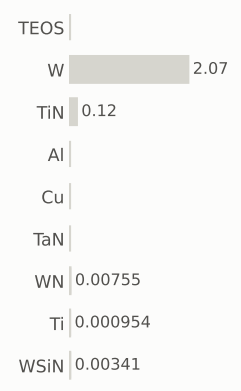

gases emitted (g)

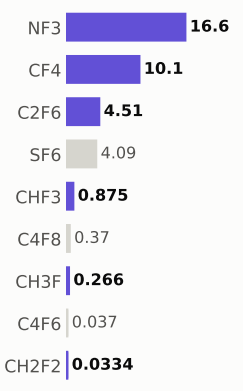

Step #15050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,637.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

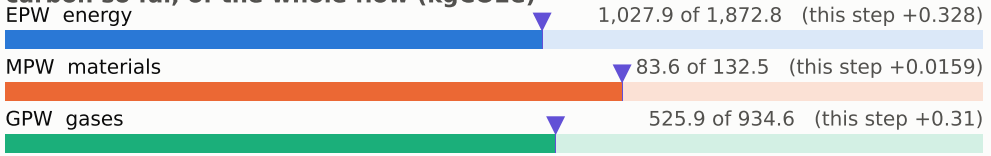

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

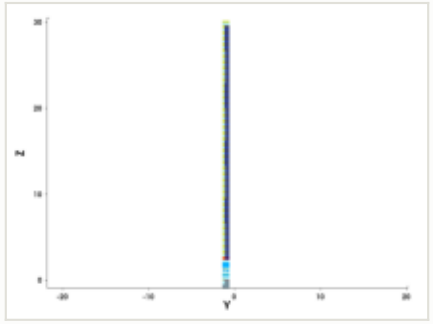

y cut at -1.035 µm

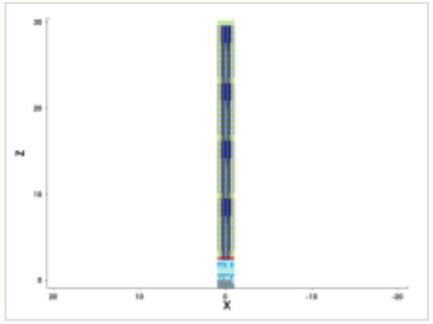

mask for this step

no mask for this step

steps by process area

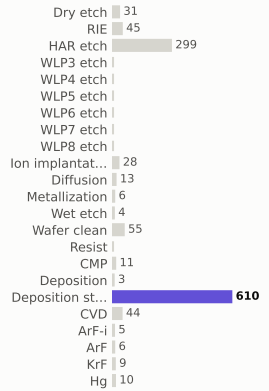

materials deposited (g)

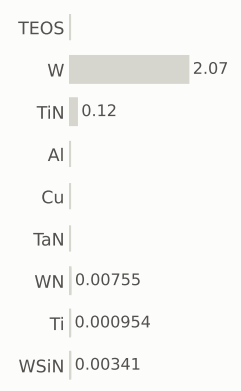

gases emitted (g)

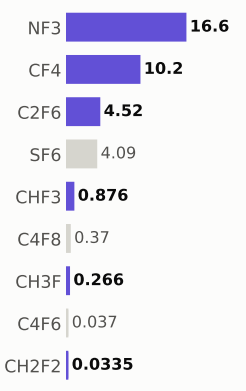

Step #15060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,637.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

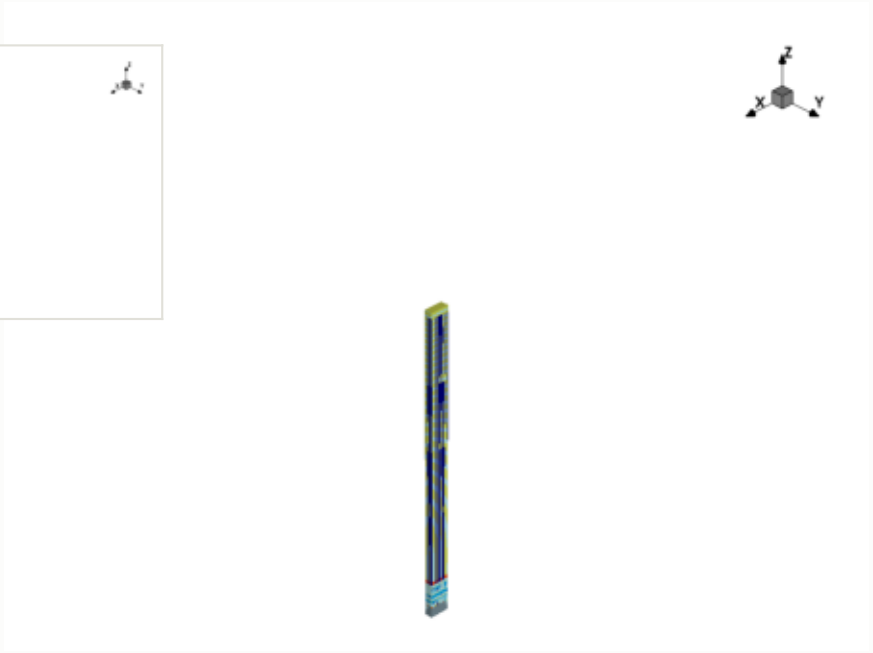

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

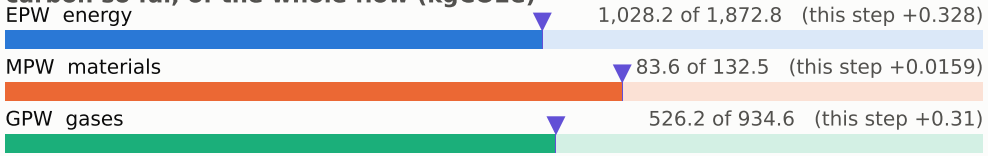

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

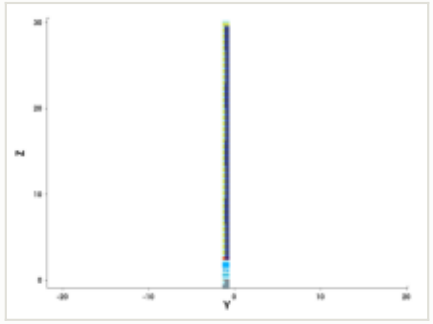

y cut at -1.035 µm

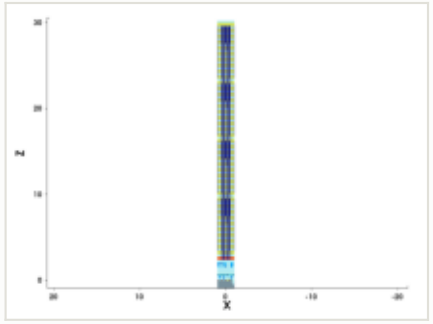

mask for this step

no mask for this step

steps by process area

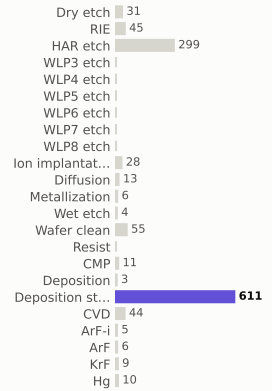

materials deposited (g)

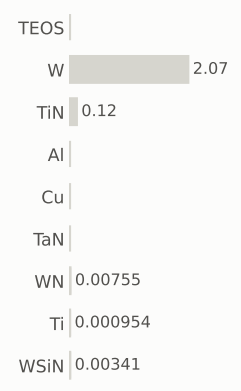

gases emitted (g)

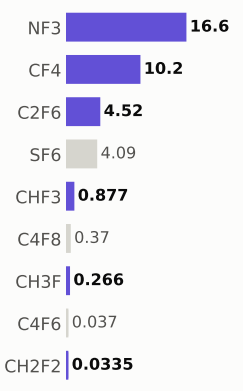

Step #15070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,638.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

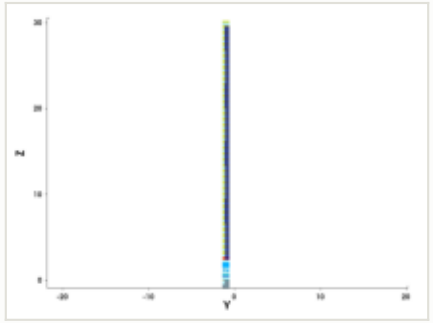

y cut at -1.035 µm

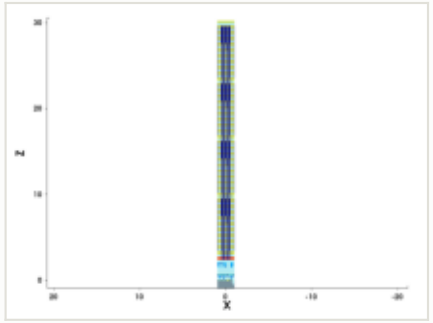

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

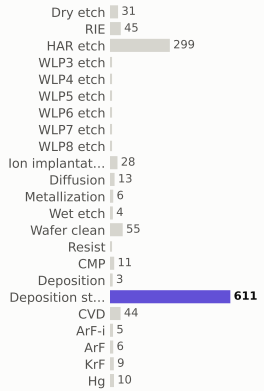

materials deposited (g)

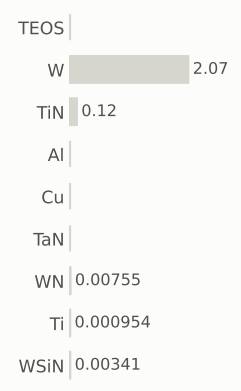

gases emitted (g)

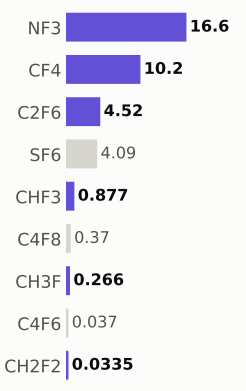

Step #15080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,639.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

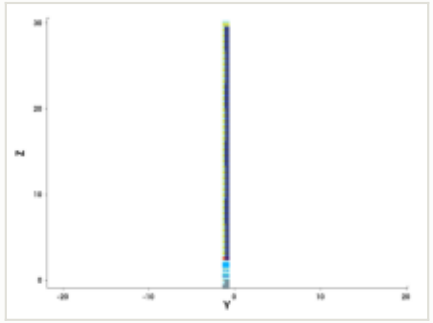

y cut at -1.035 µm

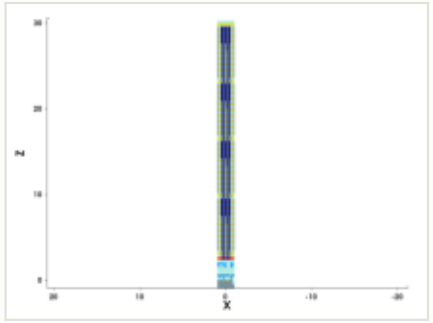

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

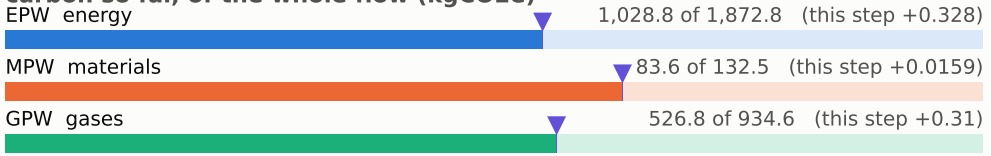

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

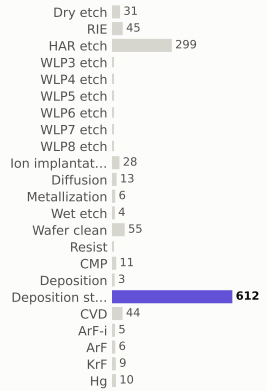

materials deposited (g)

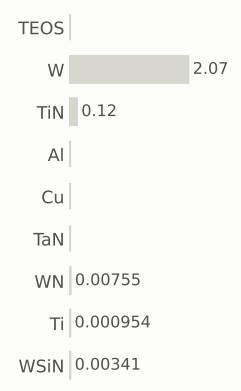

gases emitted (g)

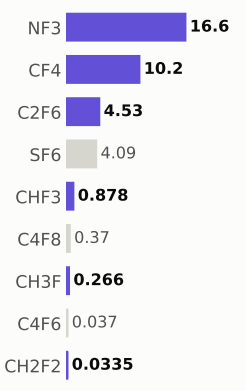

Step #15090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,639.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

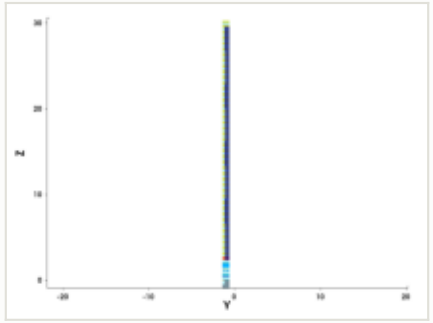

y cut at -1.035 µm

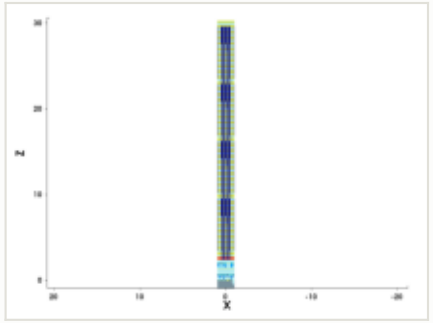

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

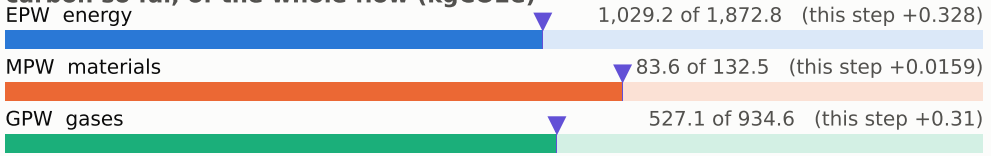

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

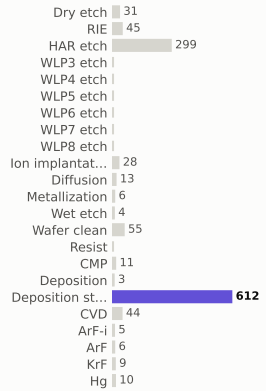

materials deposited (g)

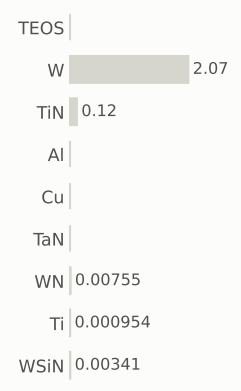

gases emitted (g)

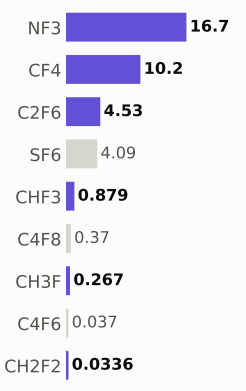

Step #15100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,640.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

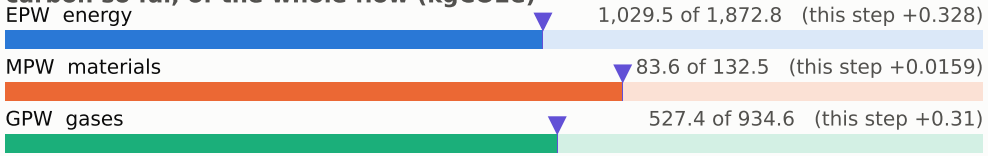

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

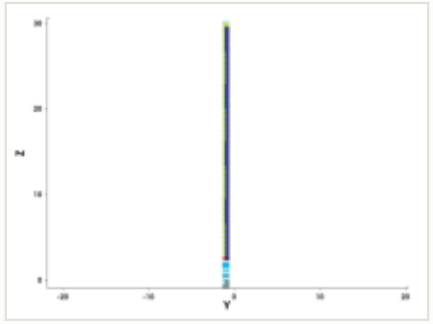

y cut at -1.035 µm

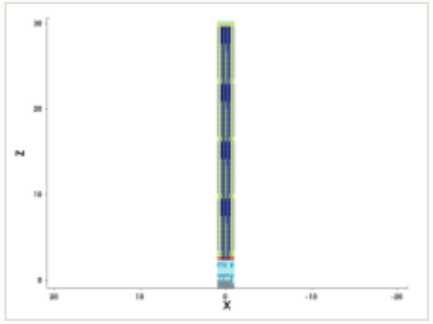

mask for this step

no mask for this step

steps by process area

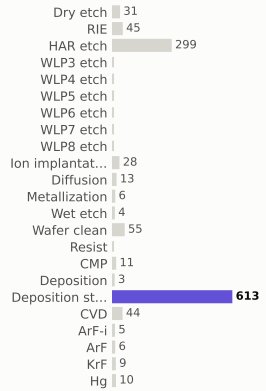

materials deposited (g)

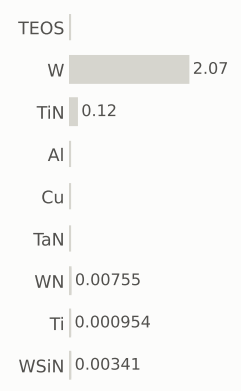

gases emitted (g)

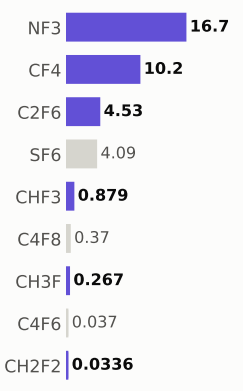

Step #15110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,641.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

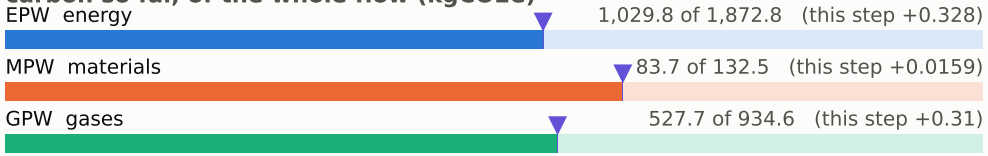

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

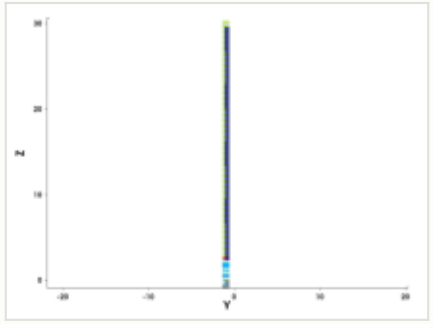

y cut at -1.035 µm

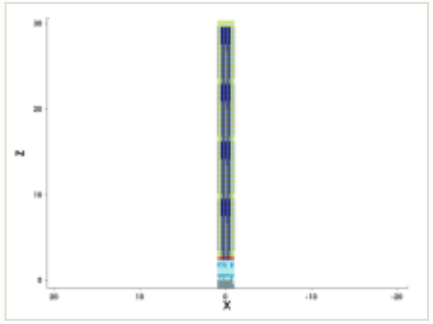

mask for this step

no mask for this step

steps by process area

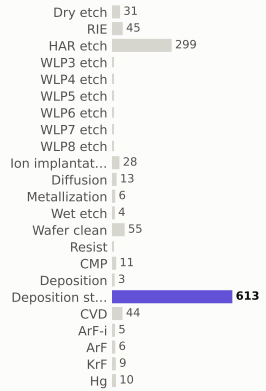

materials deposited (g)

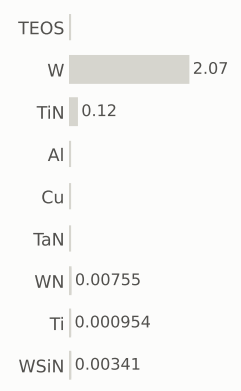

gases emitted (g)

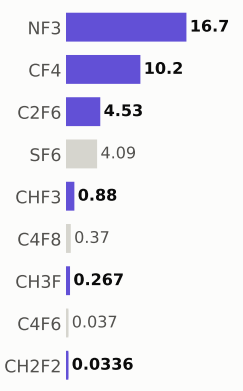

Step #15120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,641.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

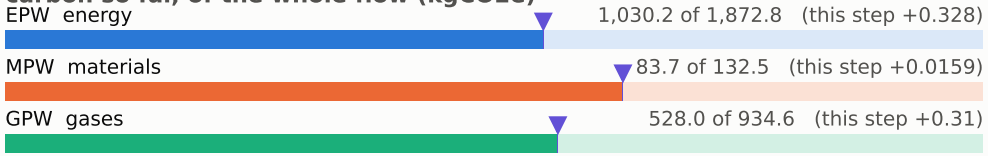

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

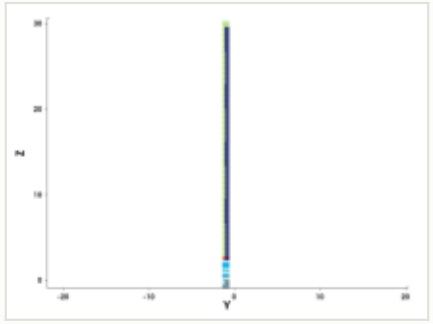

y cut at -1.035 µm

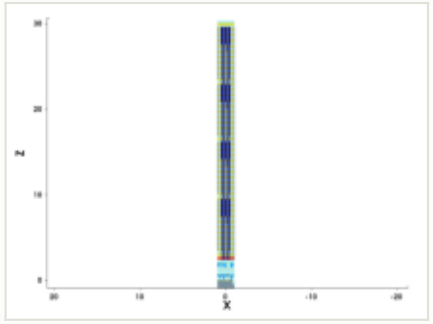

mask for this step

no mask for this step

steps by process area

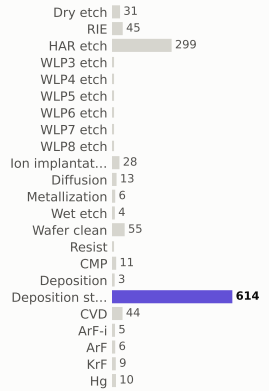

materials deposited (g)

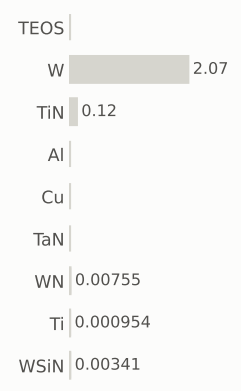

gases emitted (g)

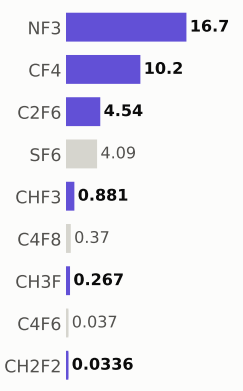

Step #15130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,642.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

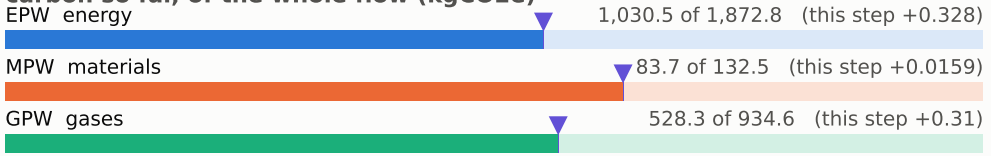

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

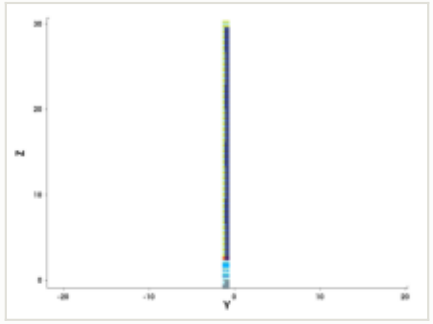

y cut at -1.035 µm

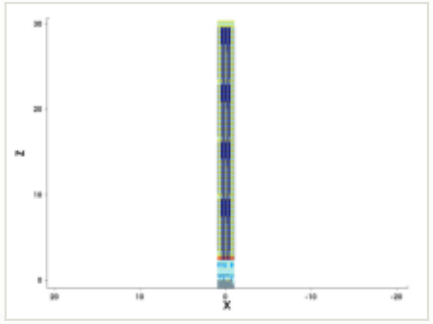

mask for this step

no mask for this step

steps by process area

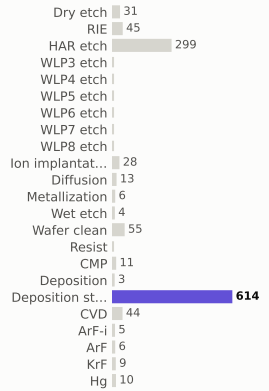

materials deposited (g)

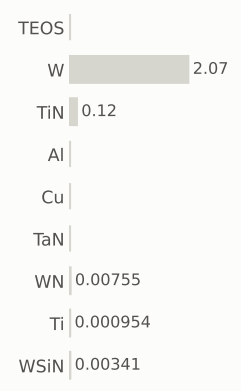

gases emitted (g)

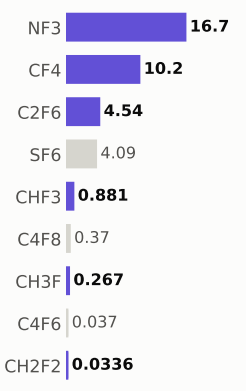

Step #15140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,643.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

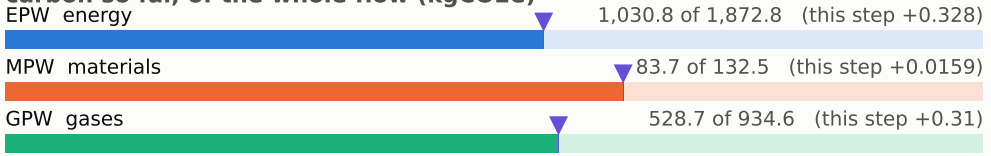

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

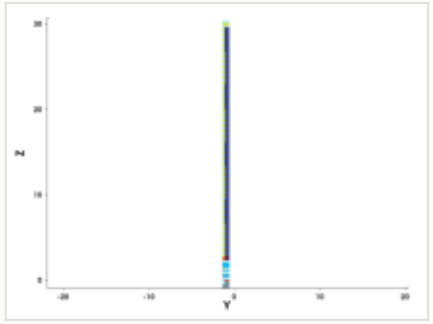

y cut at -1.035 µm

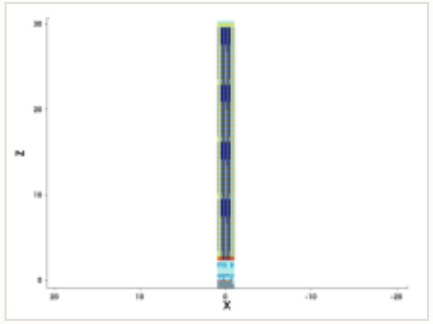

mask for this step

no mask for this step

steps by process area

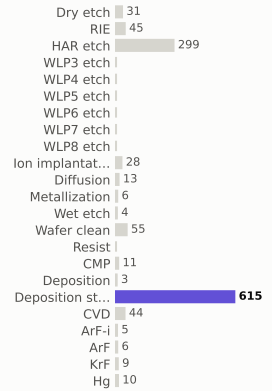

materials deposited (g)

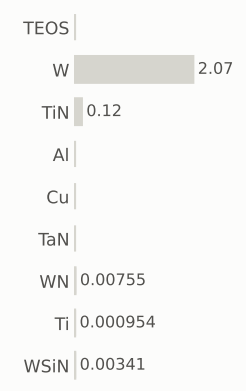

gases emitted (g)

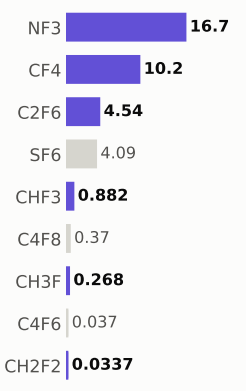

Step #15150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,643.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

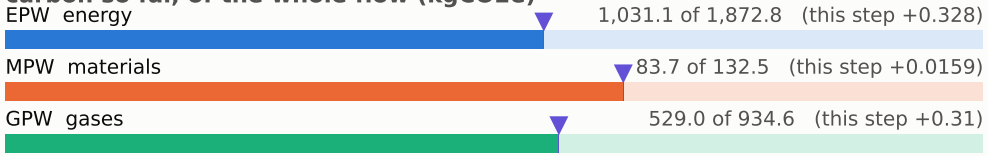

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

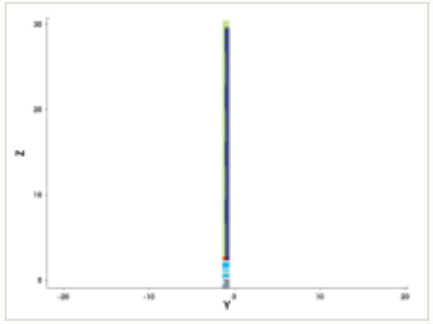

y cut at -1.035 µm

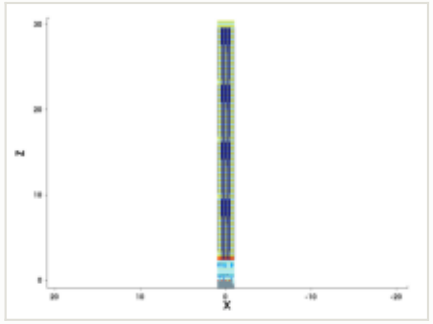

mask for this step

no mask for this step

steps by process area

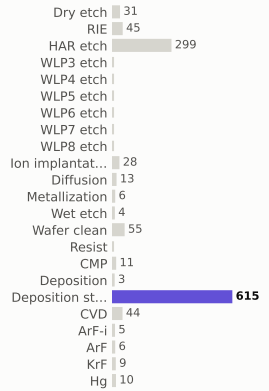

materials deposited (g)

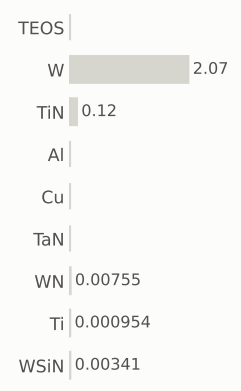

gases emitted (g)

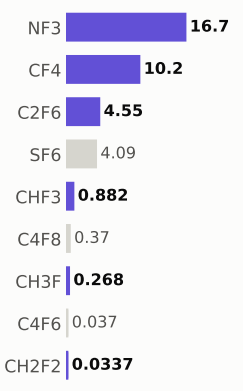

Step #15160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,644.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

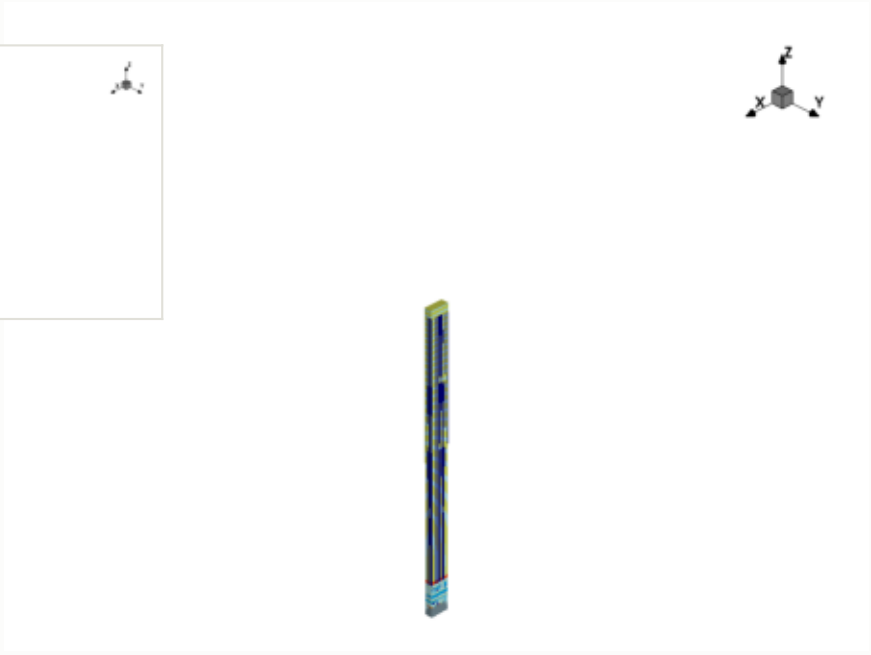

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

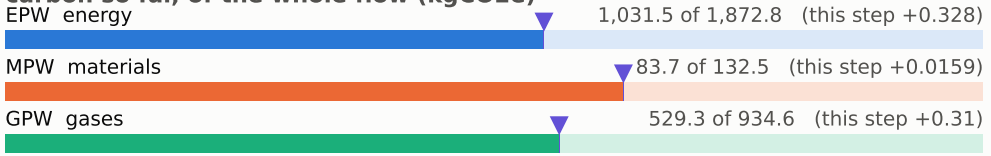

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

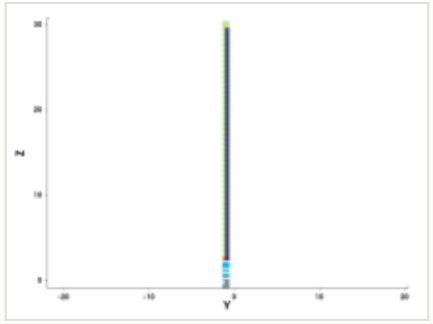

y cut at -1.035 µm

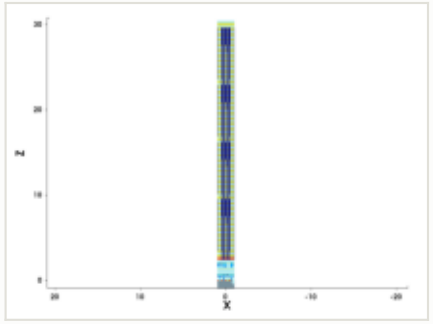

mask for this step

no mask for this step

steps by process area

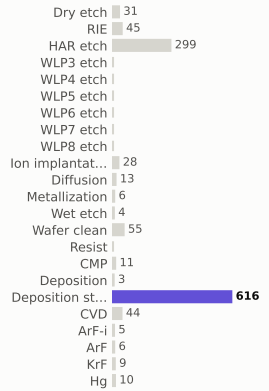

materials deposited (g)

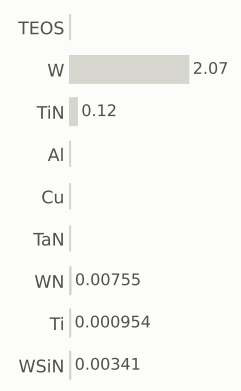

gases emitted (g)

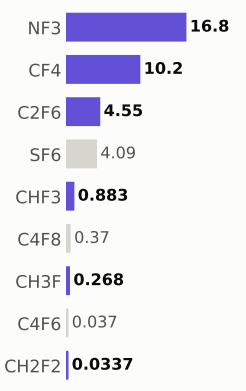

Step #15170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,645.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

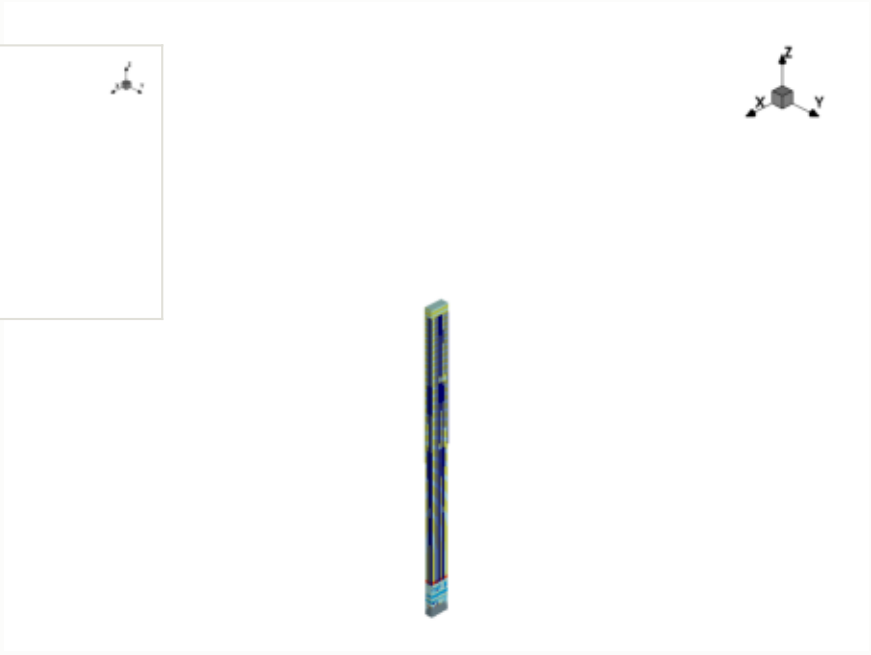

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

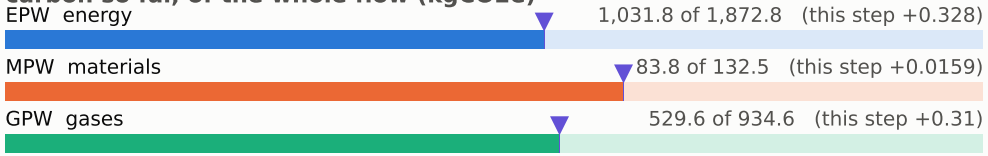

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

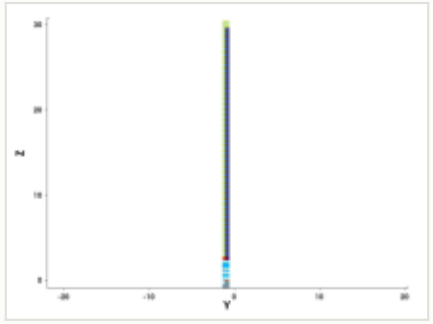

y cut at -1.035 µm

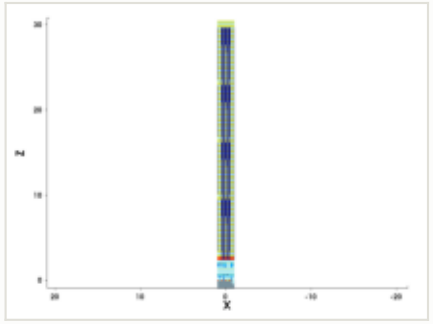

mask for this step

no mask for this step

steps by process area

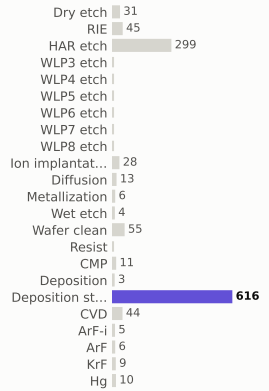

materials deposited (g)

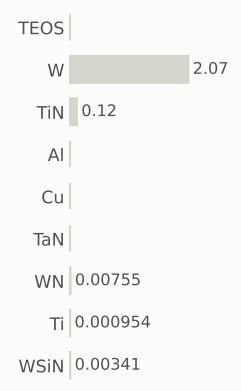

gases emitted (g)

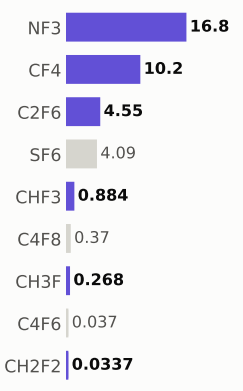

Step #15180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,645.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

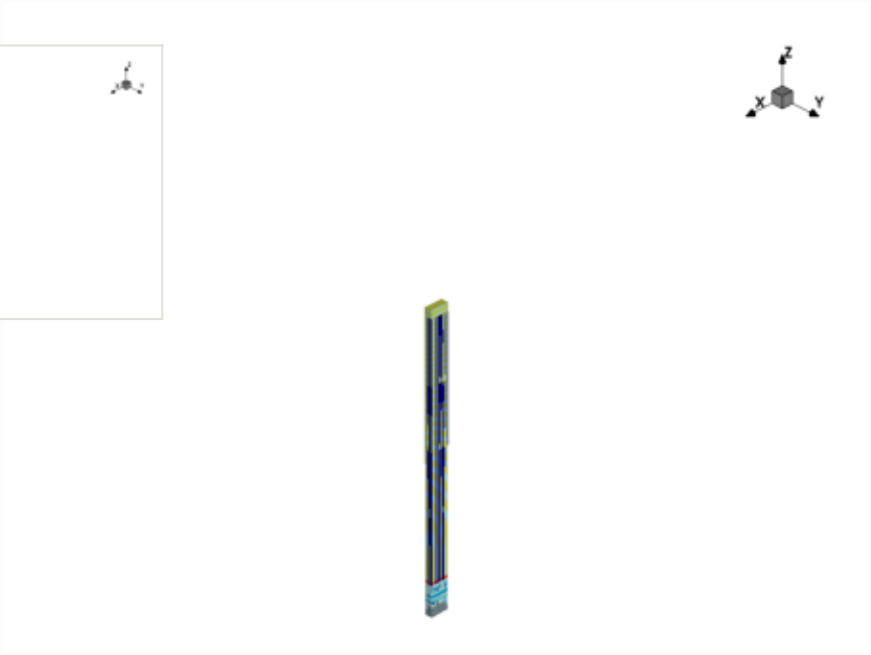

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

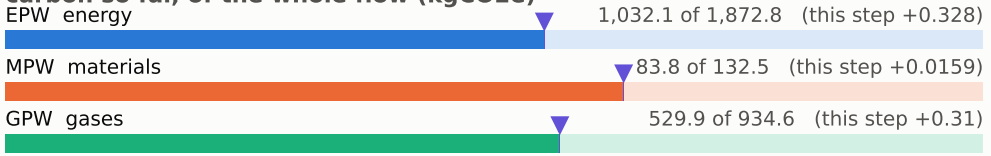

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

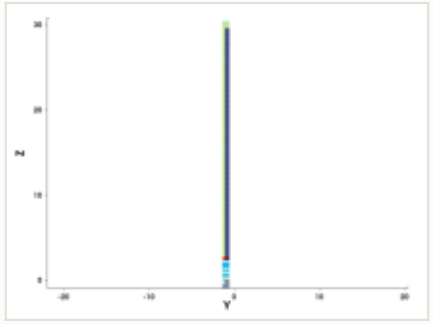

y cut at -1.035 µm

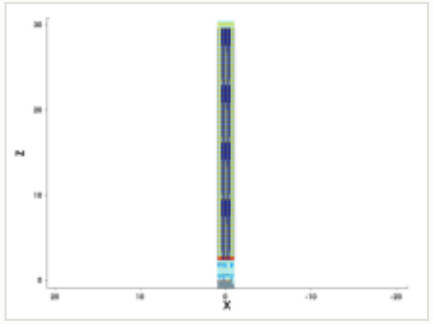

mask for this step

no mask for this step

steps by process area

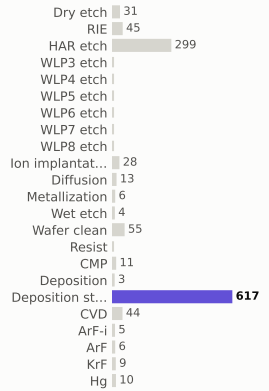

materials deposited (g)

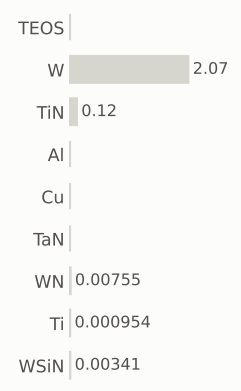

gases emitted (g)

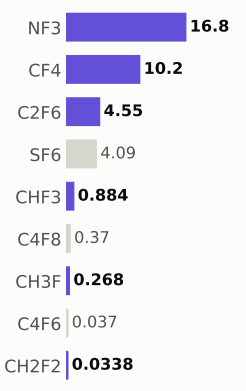

Step #15190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,646.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

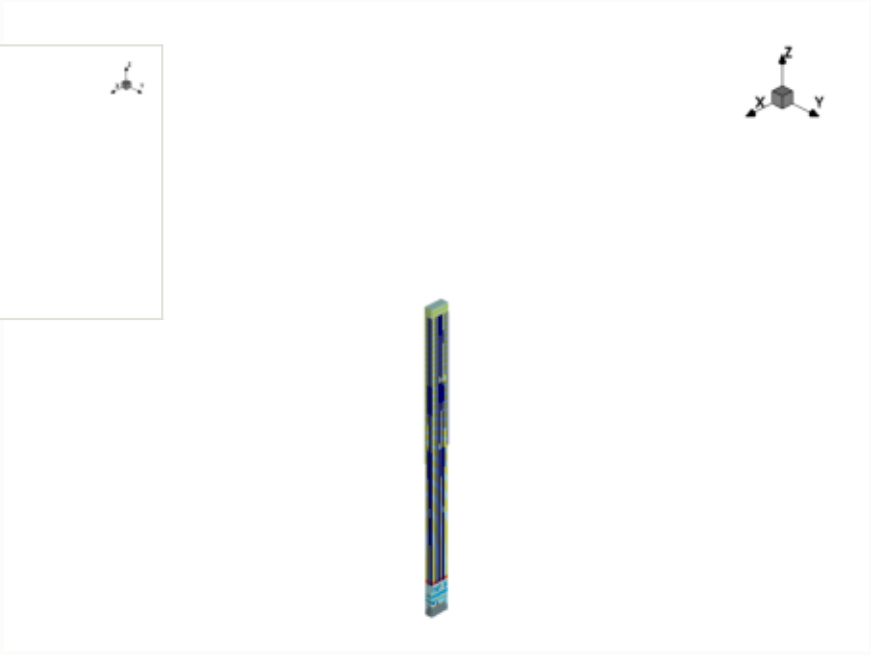

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

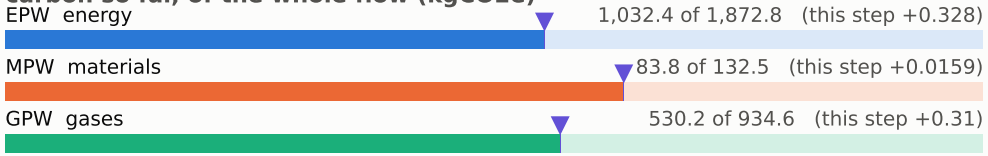

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

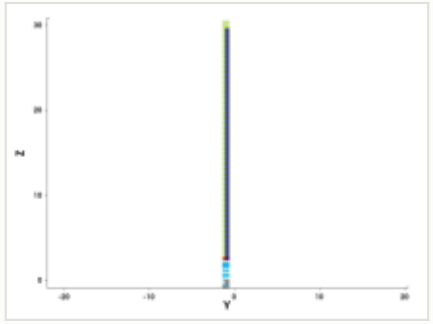

y cut at -1.035 µm

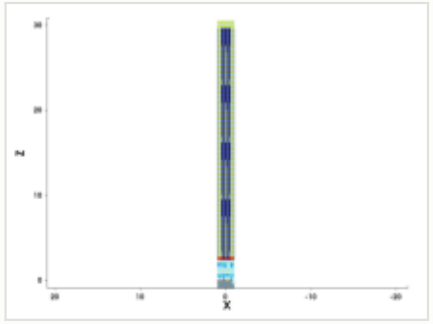

mask for this step

no mask for this step

steps by process area

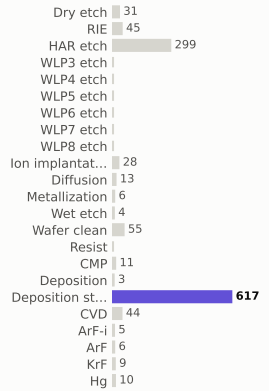

materials deposited (g)

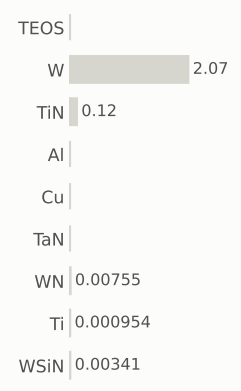

gases emitted (g)

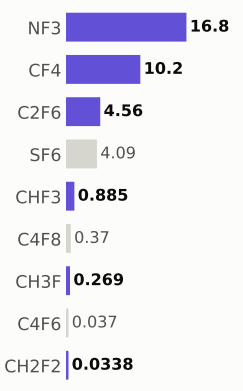

Step #15200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,647.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

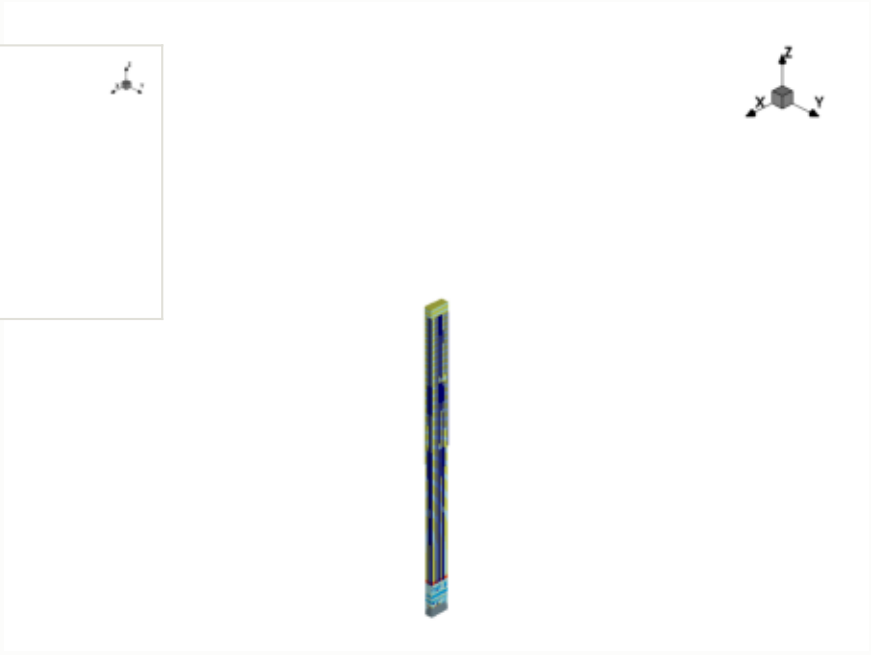

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

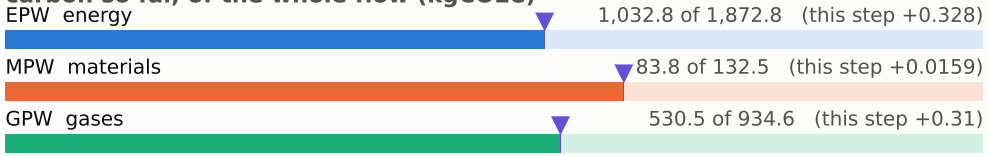

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

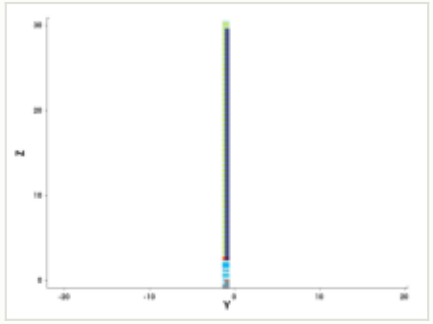

y cut at -1.035 µm

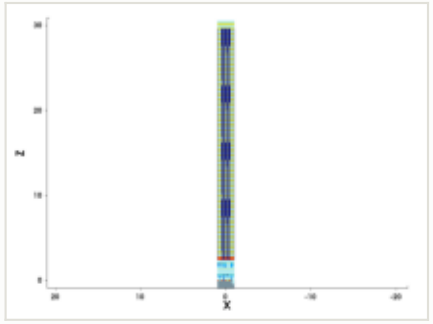

mask for this step

no mask for this step

steps by process area

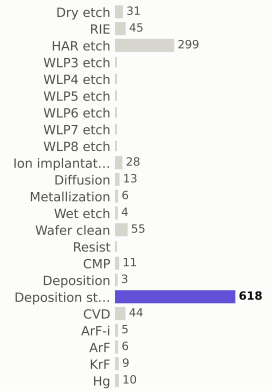

materials deposited (g)

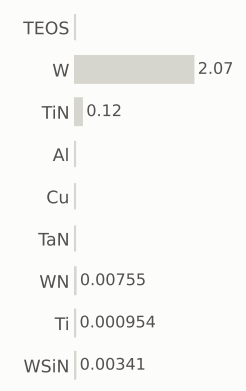

gases emitted (g)

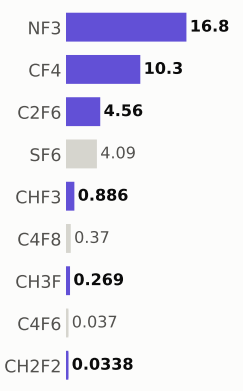

Step #15210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,647.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

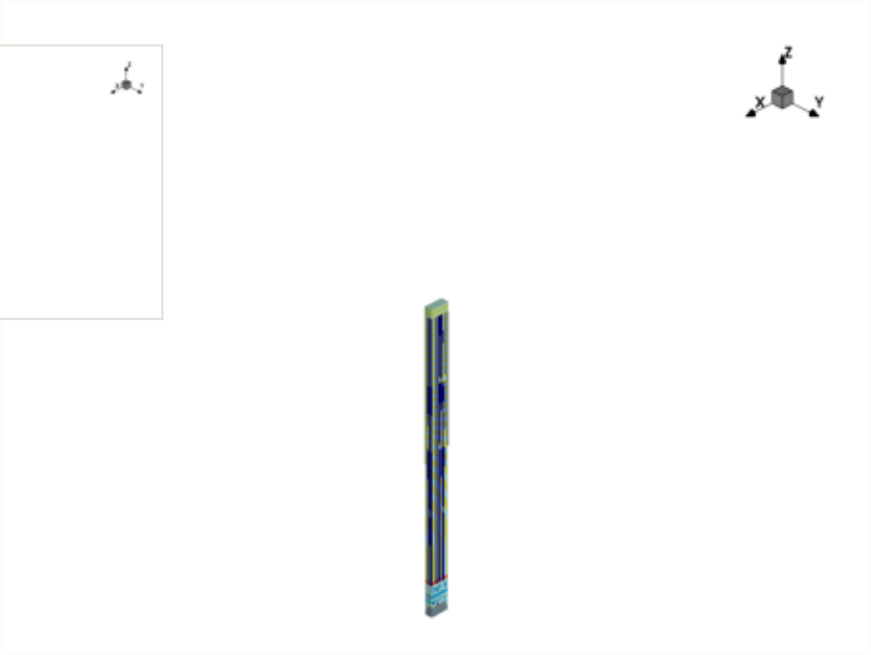

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

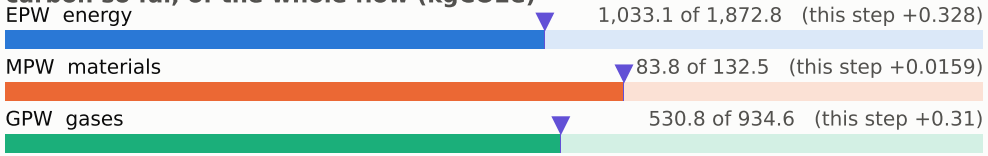

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

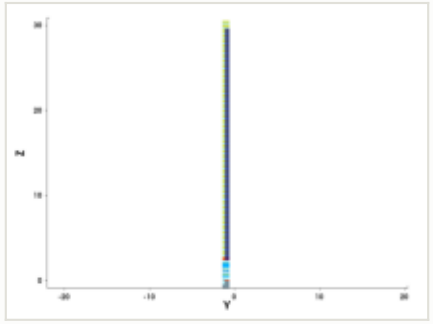

y cut at -1.035 µm

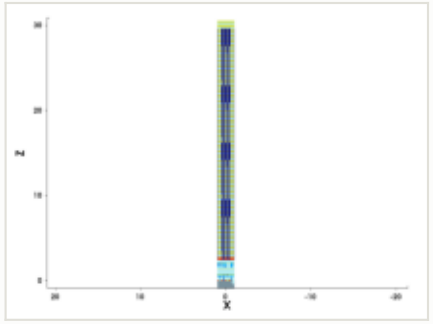

mask for this step

no mask for this step

steps by process area

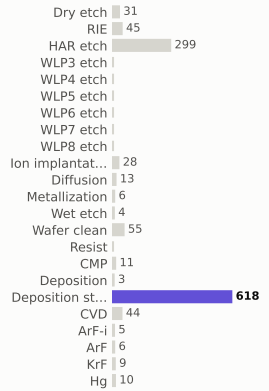

materials deposited (g)

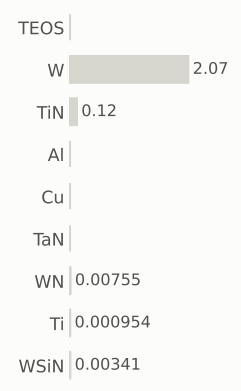

gases emitted (g)

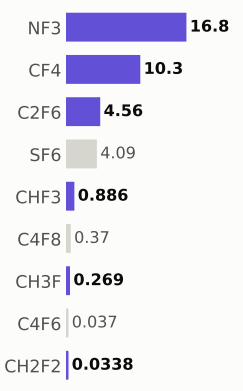

Step #15220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,648.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

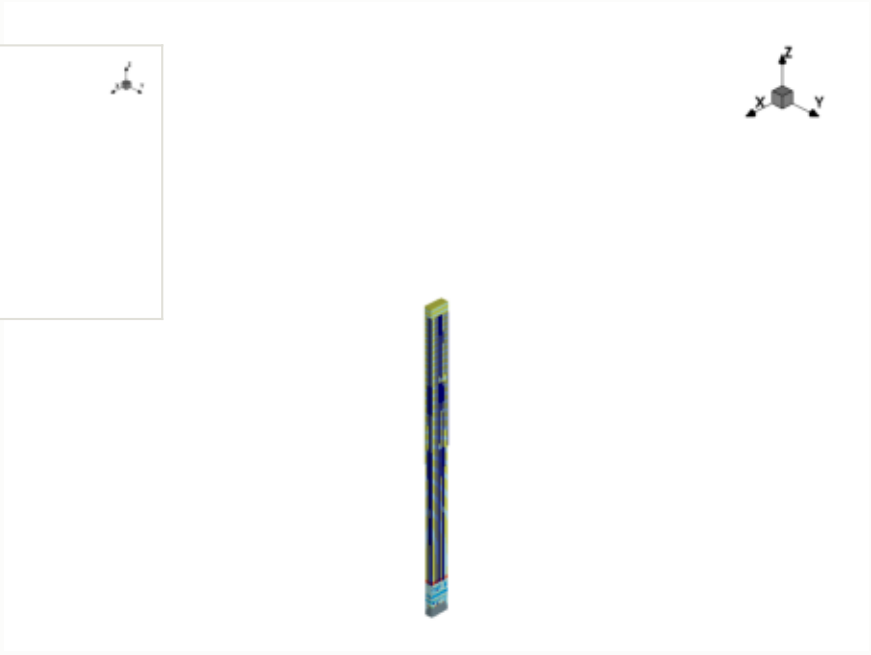

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

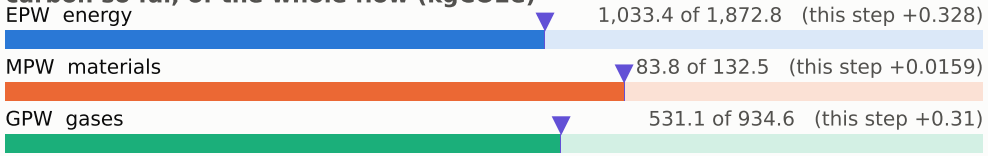

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

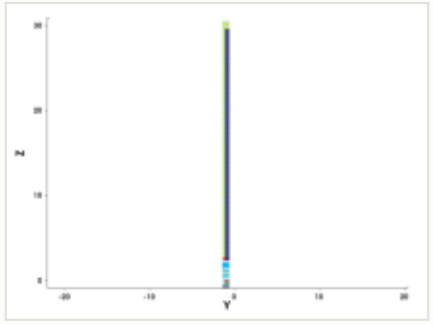

y cut at -1.035 µm

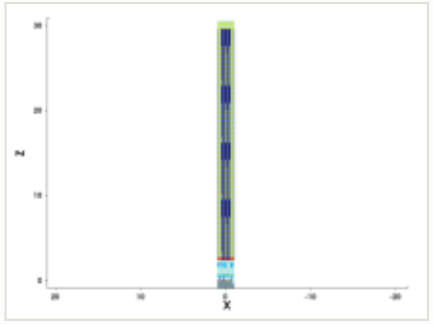

mask for this step

no mask for this step

steps by process area

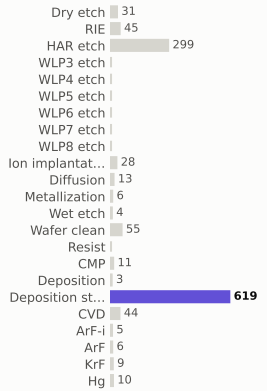

materials deposited (g)

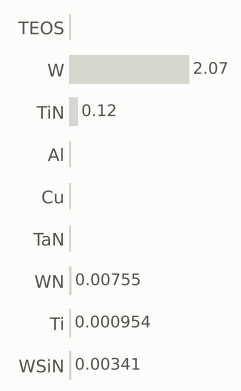

gases emitted (g)

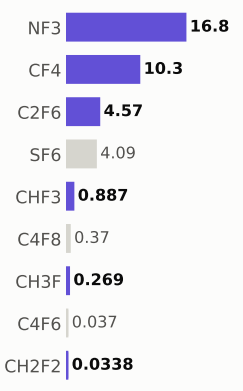

Step #15230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,649.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

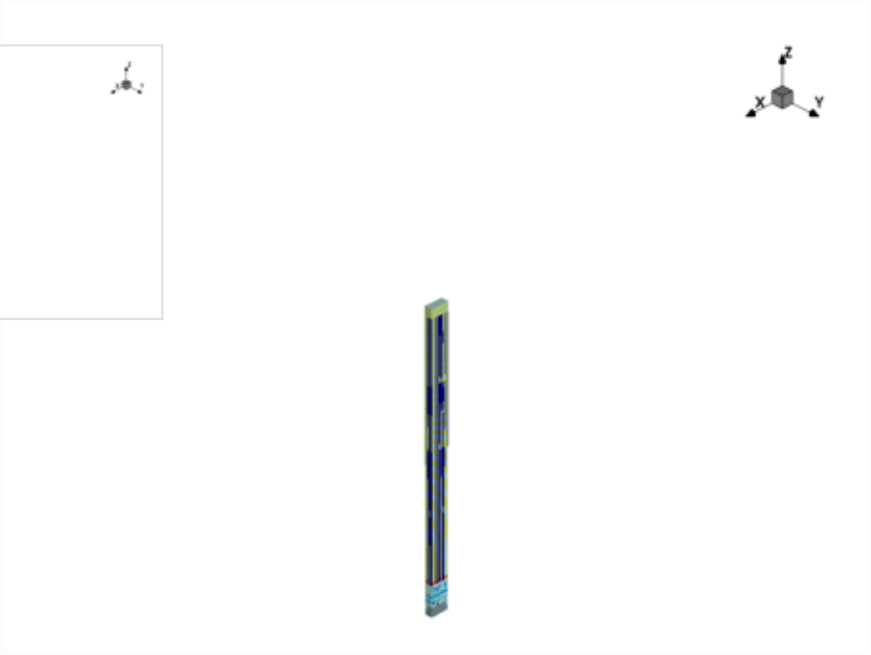

x cut at 0.000 µm

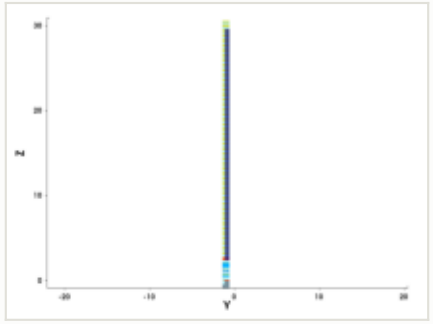

y cut at -1.035 µm

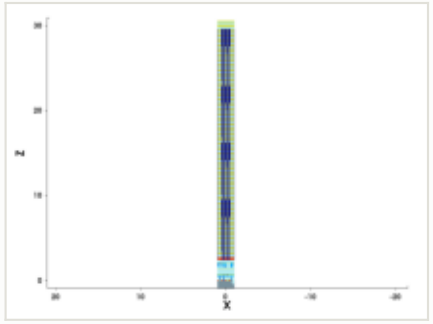

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 1,033.8 of 1,872.8 (this step +0.328)

MPW materials — 83.8 of 132.5 (this step +0.0159)

GPW gases — 531.4 of 934.6 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

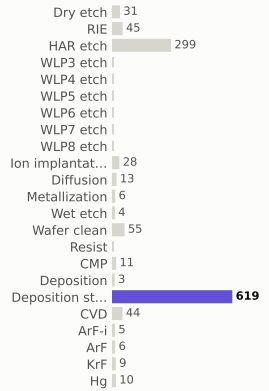

materials deposited (g)

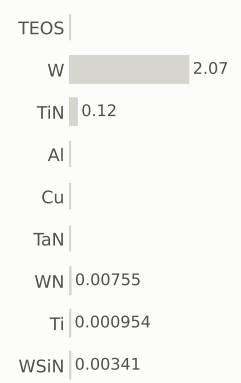

gases emitted (g)

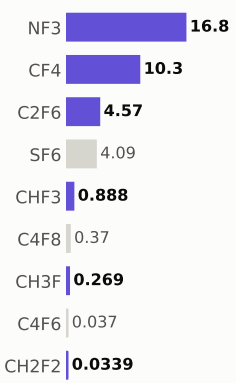

Step #15240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,649.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

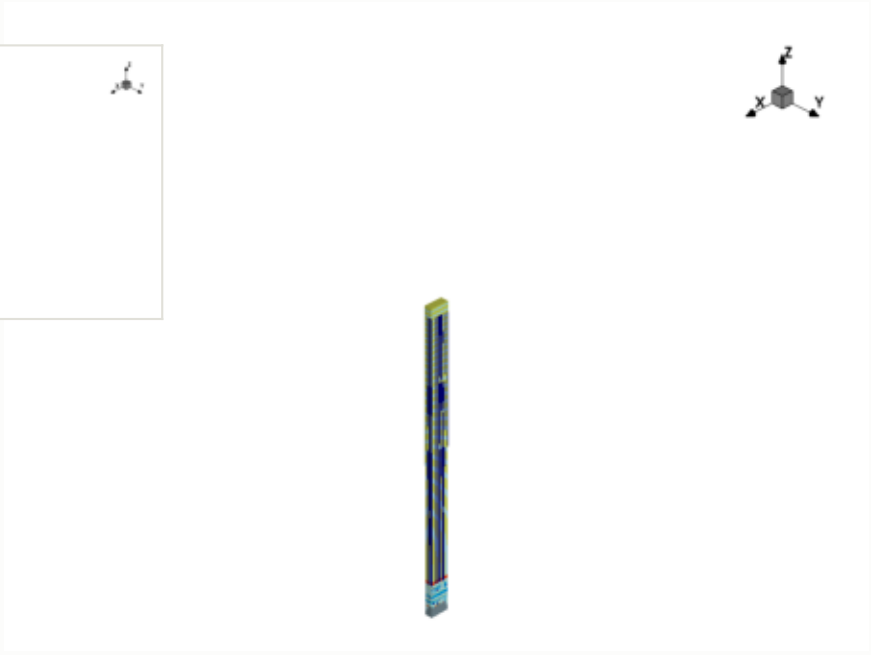

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

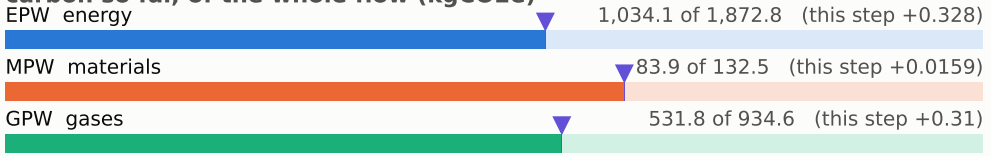

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

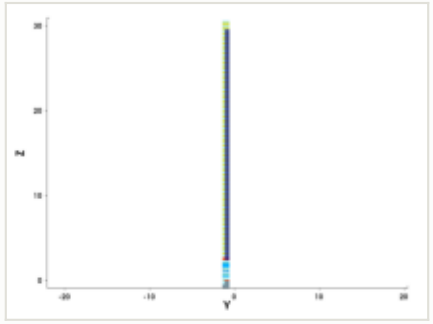

y cut at -1.035 µm

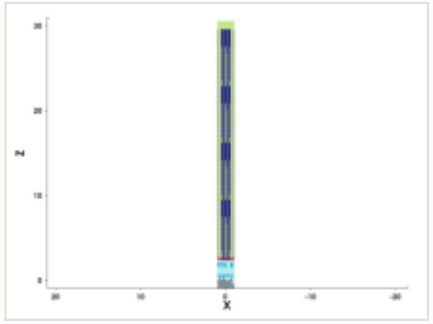

mask for this step

no mask for this step

steps by process area

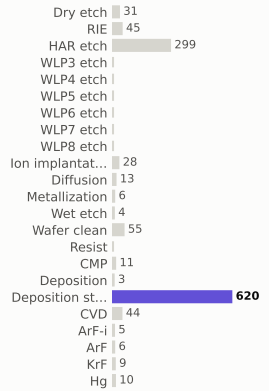

materials deposited (g)

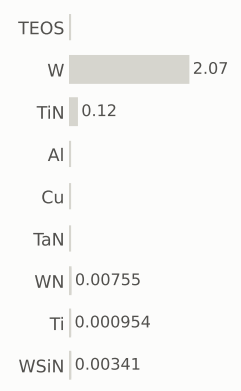

gases emitted (g)

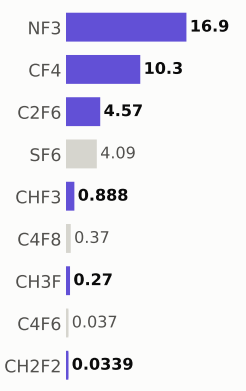

Step #15250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,650.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

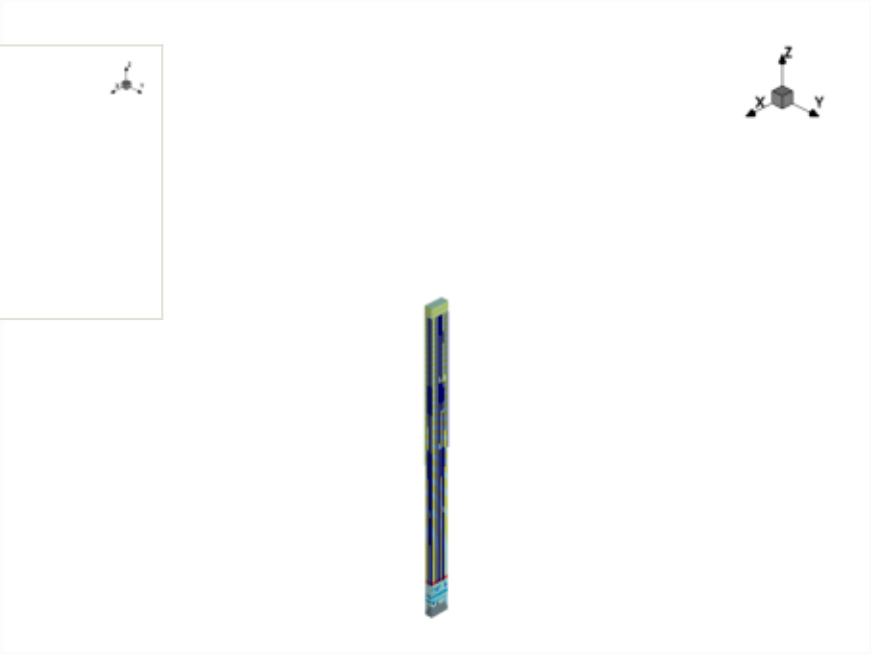

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

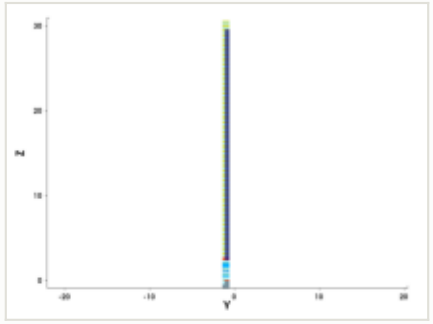

y cut at -1.035 µm

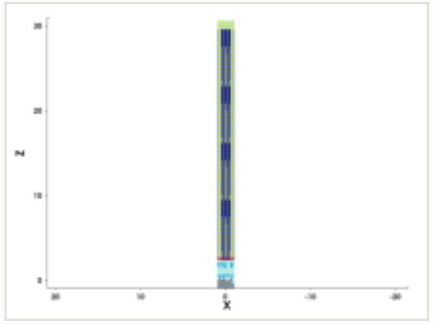

mask for this step

no mask for this step

steps by process area

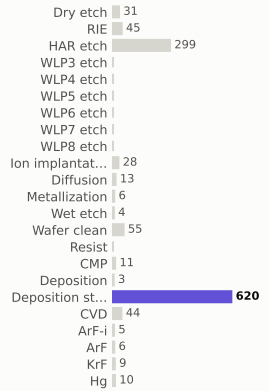

materials deposited (g)

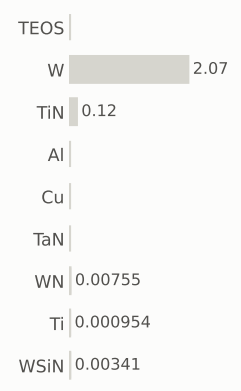

gases emitted (g)

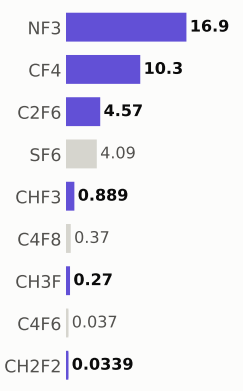

Step #15260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,651.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

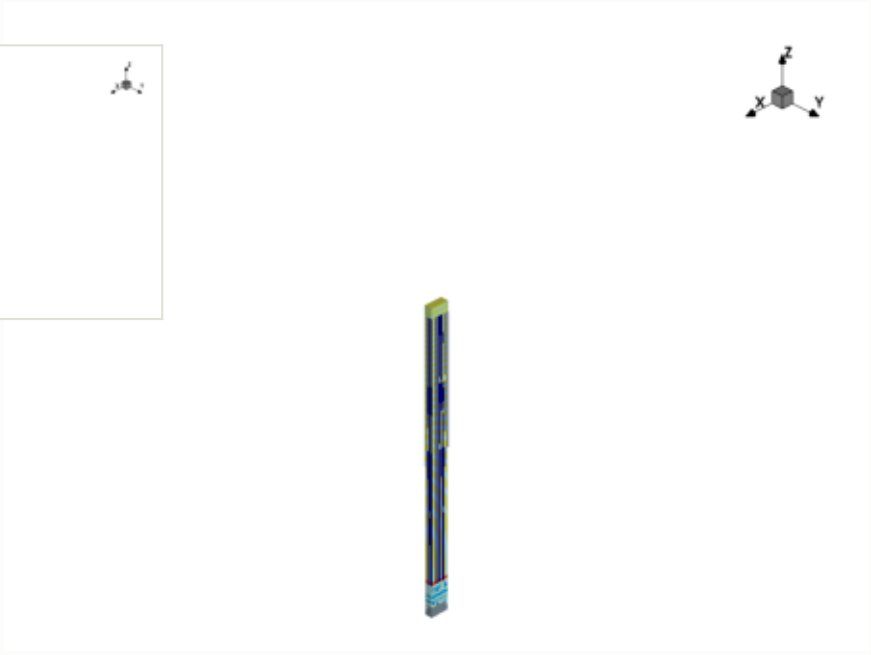

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

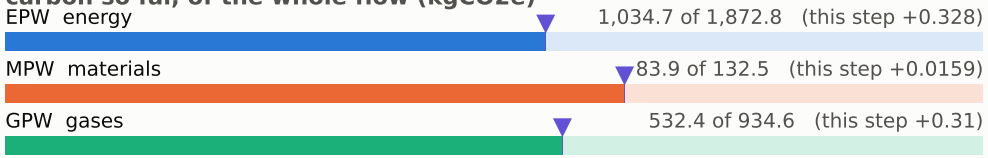

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

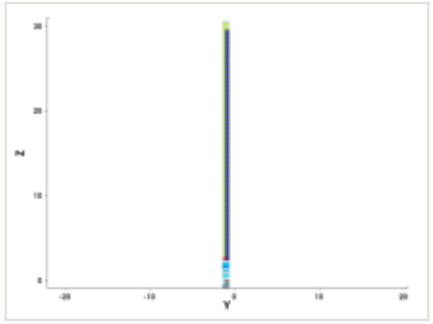

y cut at -1.035 µm

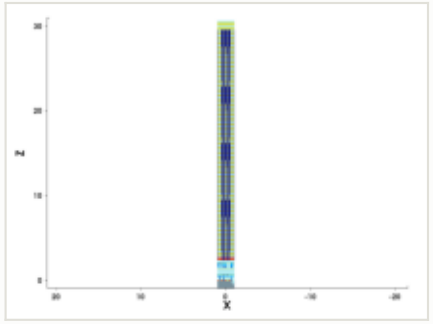

mask for this step

no mask for this step

steps by process area

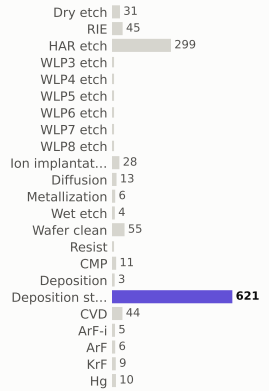

materials deposited (g)

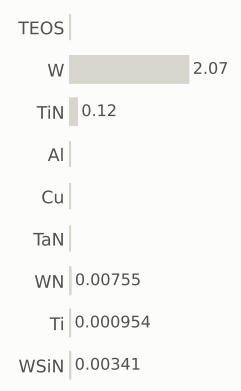

gases emitted (g)

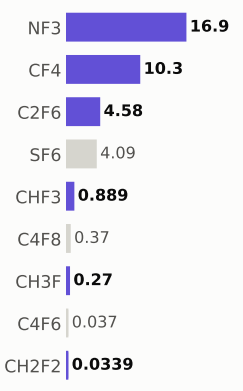

Step #15270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,651.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

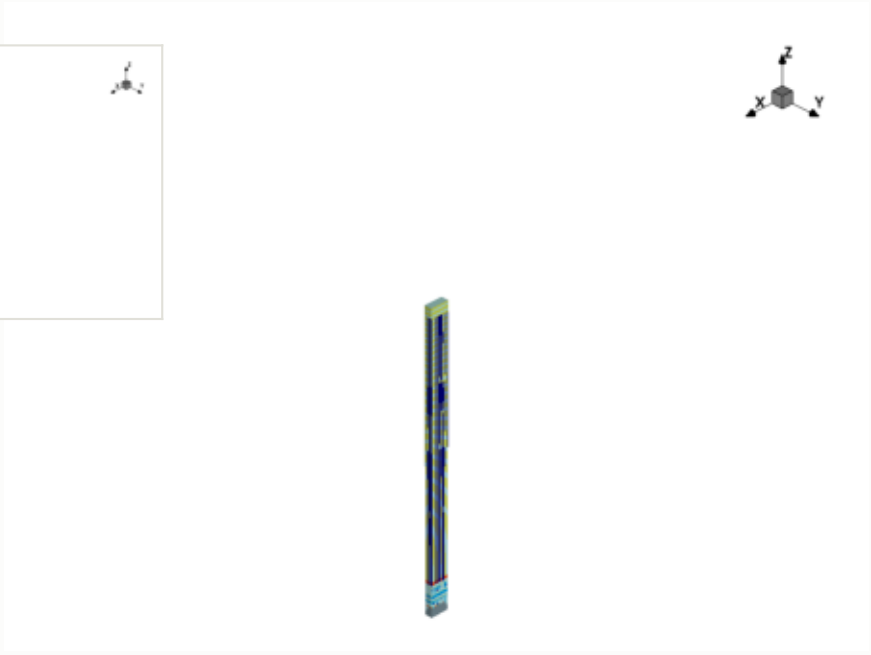

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

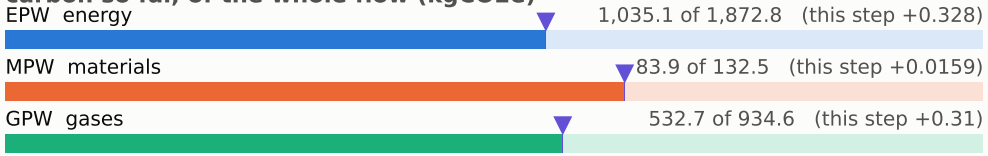

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

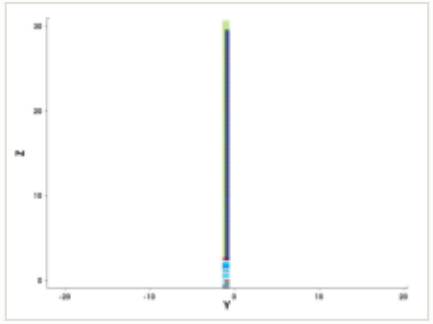

y cut at -1.035 µm

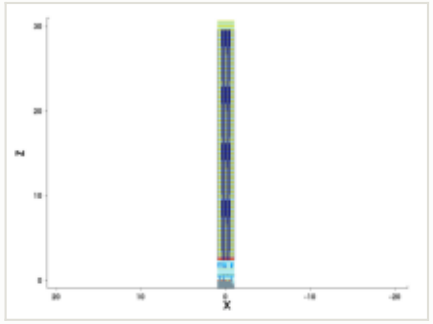

mask for this step

no mask for this step

steps by process area

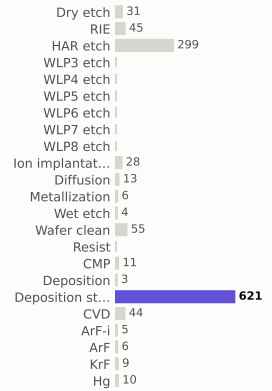

materials deposited (g)

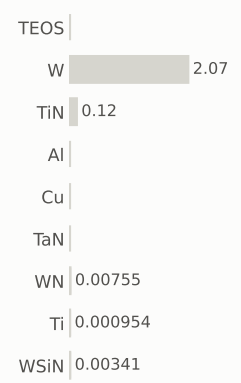

gases emitted (g)

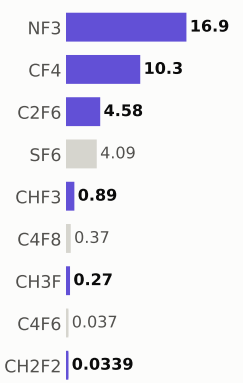

Step #15280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,652.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

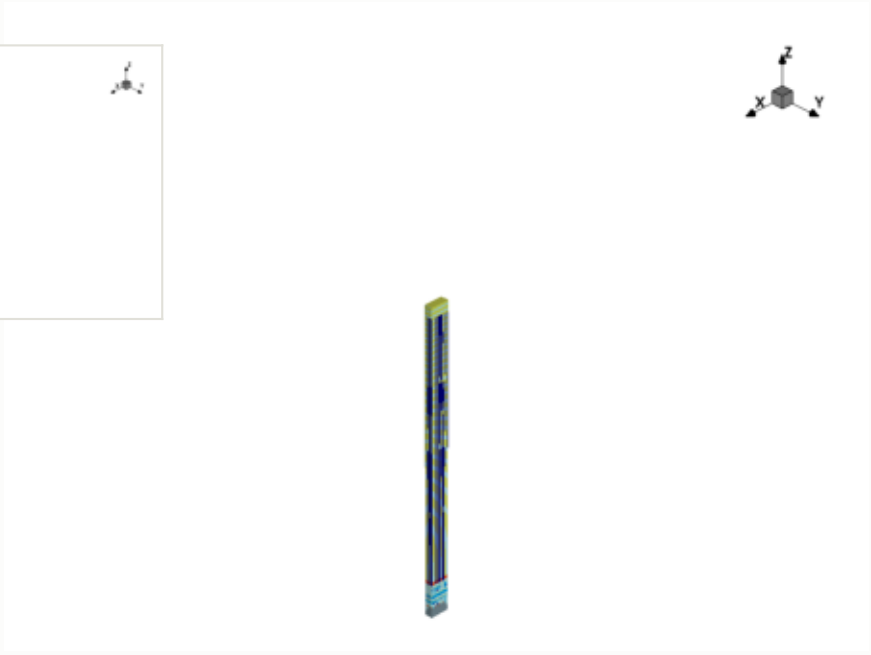

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

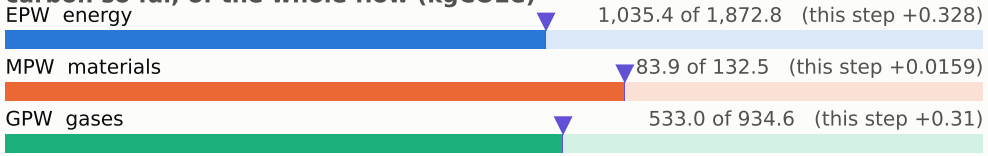

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

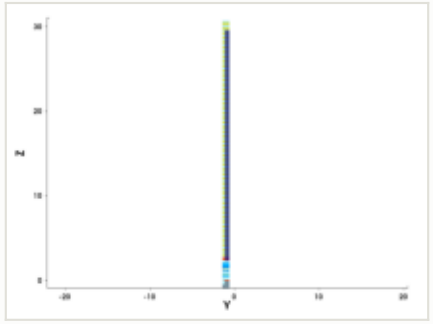

y cut at -1.035 µm

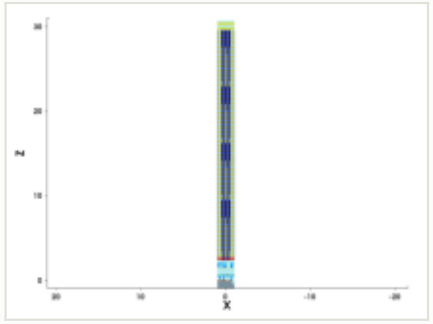

mask for this step

no mask for this step

steps by process area

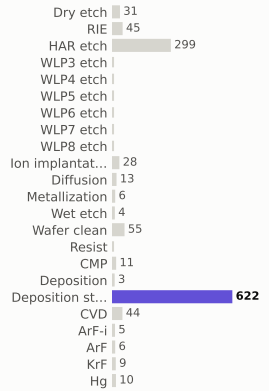

materials deposited (g)

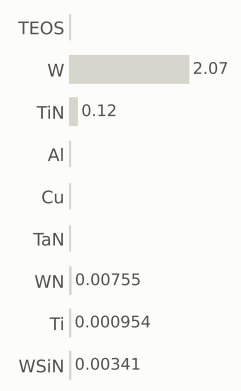

gases emitted (g)

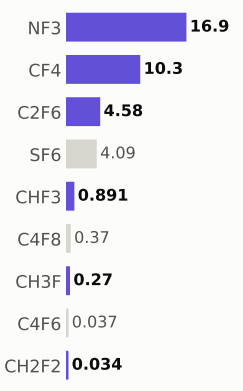

Step #15290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,653.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

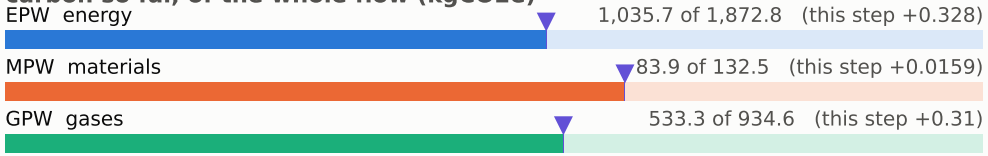

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

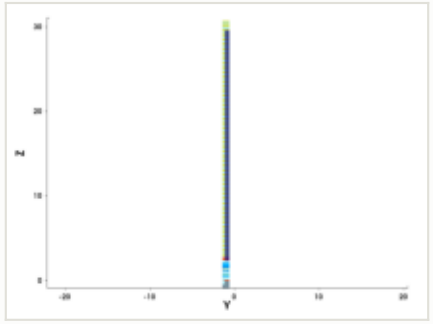

y cut at -1.035 µm

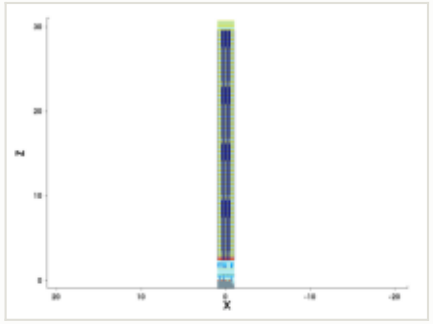

mask for this step

no mask for this step

steps by process area

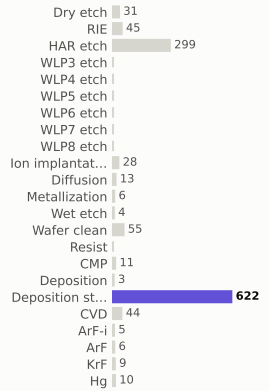

materials deposited (g)

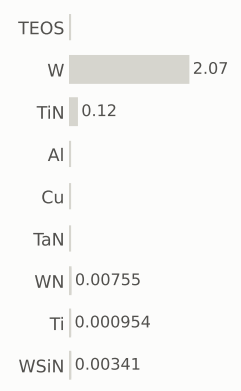

gases emitted (g)

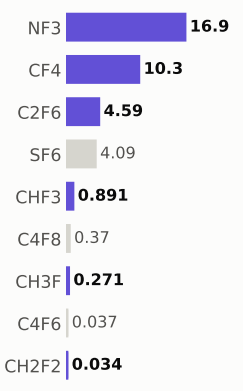

Step #15300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,653.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

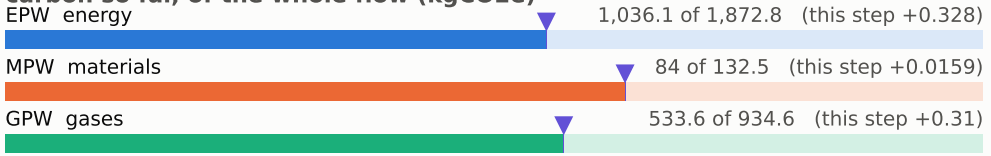

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

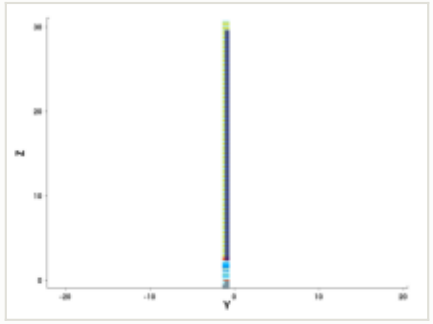

y cut at -1.035 µm

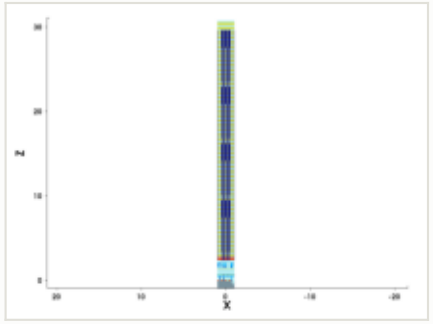

mask for this step

no mask for this step

steps by process area

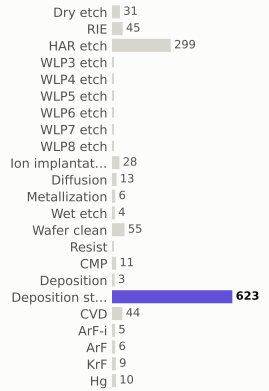

materials deposited (g)

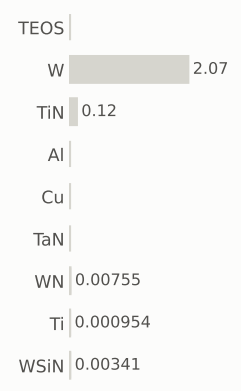

gases emitted (g)

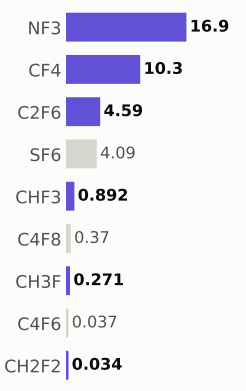

Step #15310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,654.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

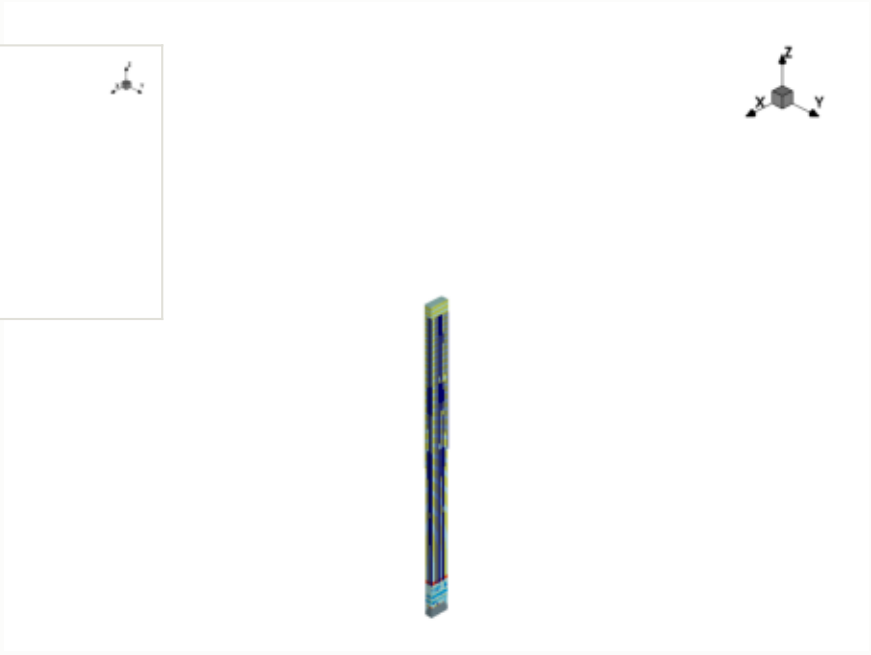

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

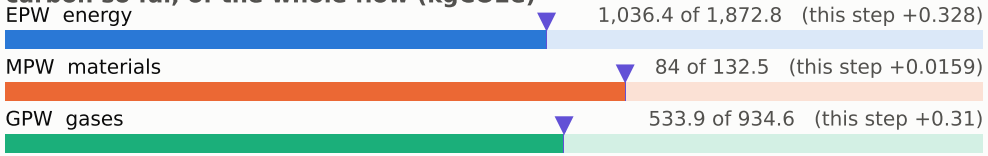

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

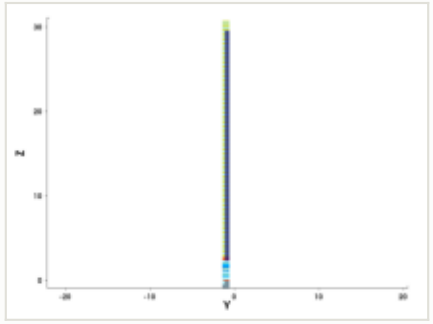

y cut at -1.035 µm

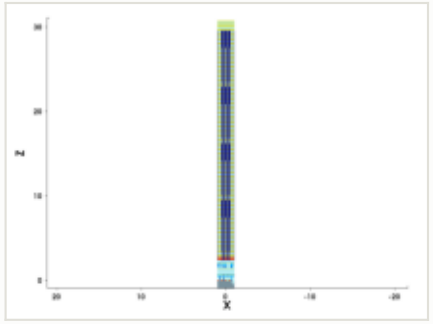

mask for this step

no mask for this step

steps by process area

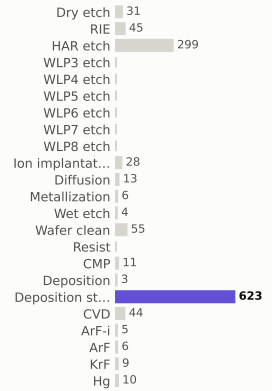

materials deposited (g)

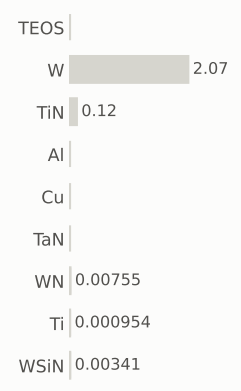

gases emitted (g)

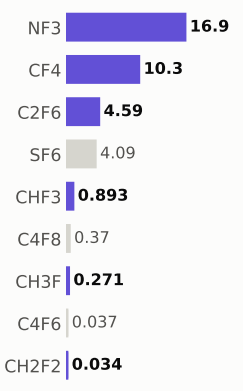

Step #15320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,654.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

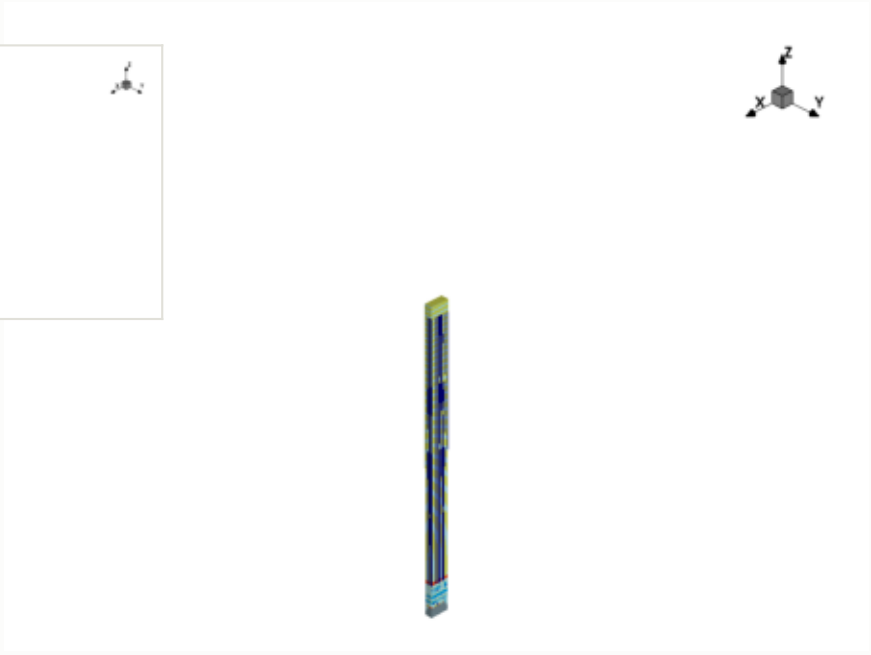

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

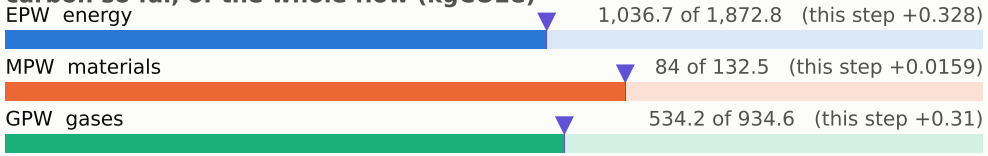

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

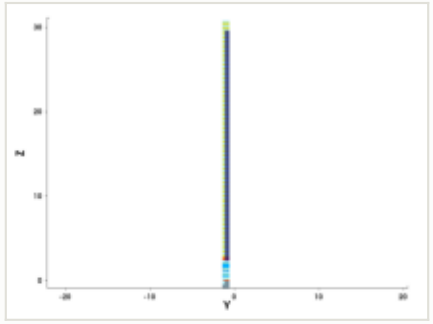

y cut at -1.035 µm

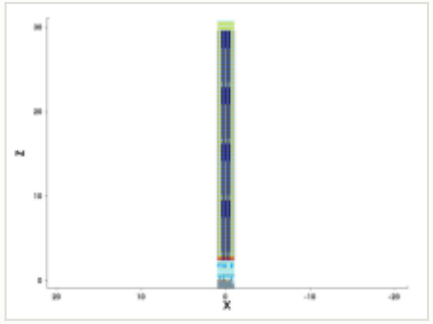

mask for this step

no mask for this step

steps by process area

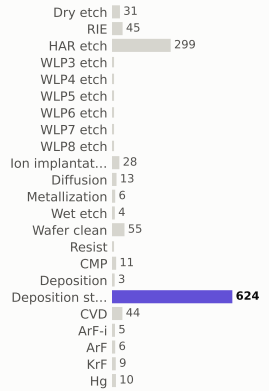

materials deposited (g)

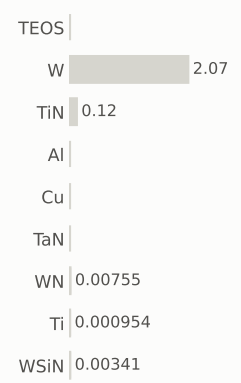

gases emitted (g)

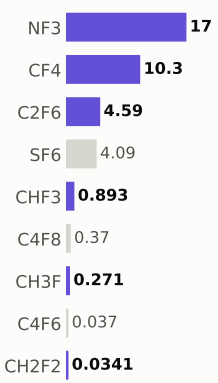

Step #15330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,655.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

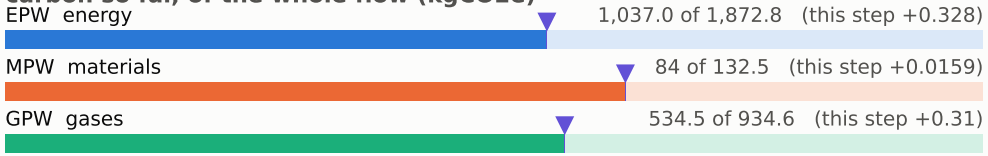

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

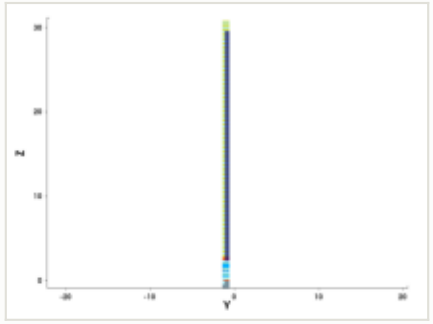

y cut at -1.035 µm

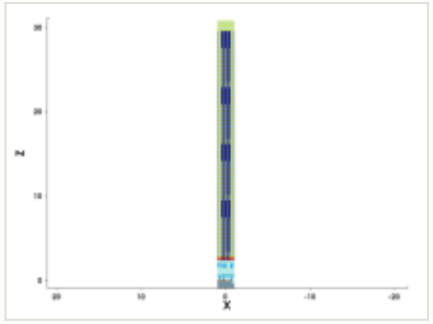

mask for this step

no mask for this step

steps by process area

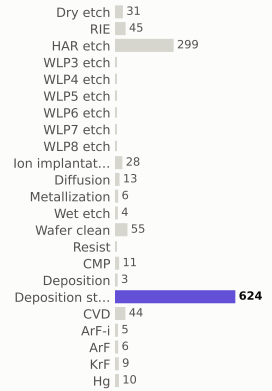

materials deposited (g)

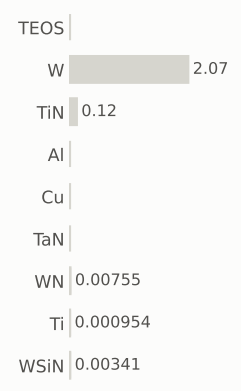

gases emitted (g)

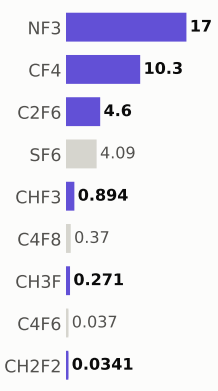

Step #15340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,656.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

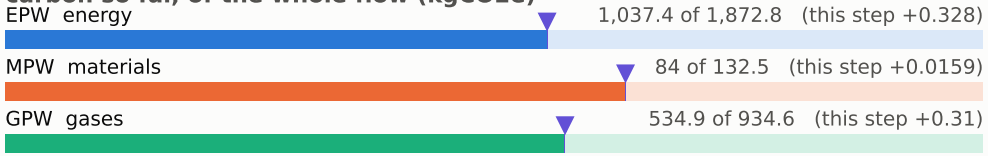

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

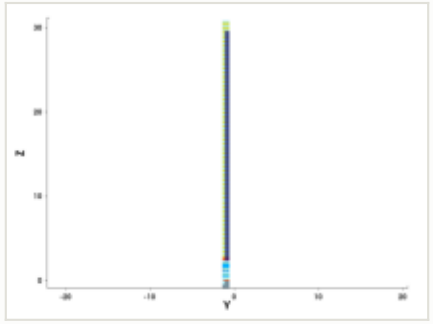

y cut at -1.035 µm

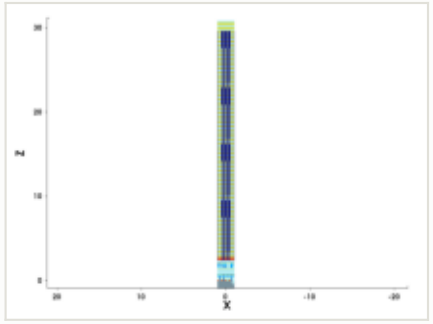

mask for this step

no mask for this step

steps by process area

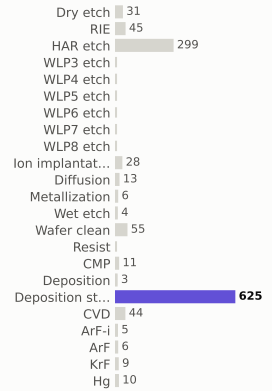

materials deposited (g)

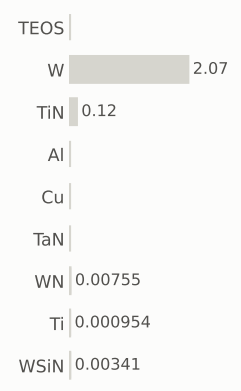

gases emitted (g)

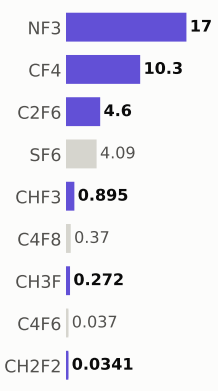

Step #15350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,656.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

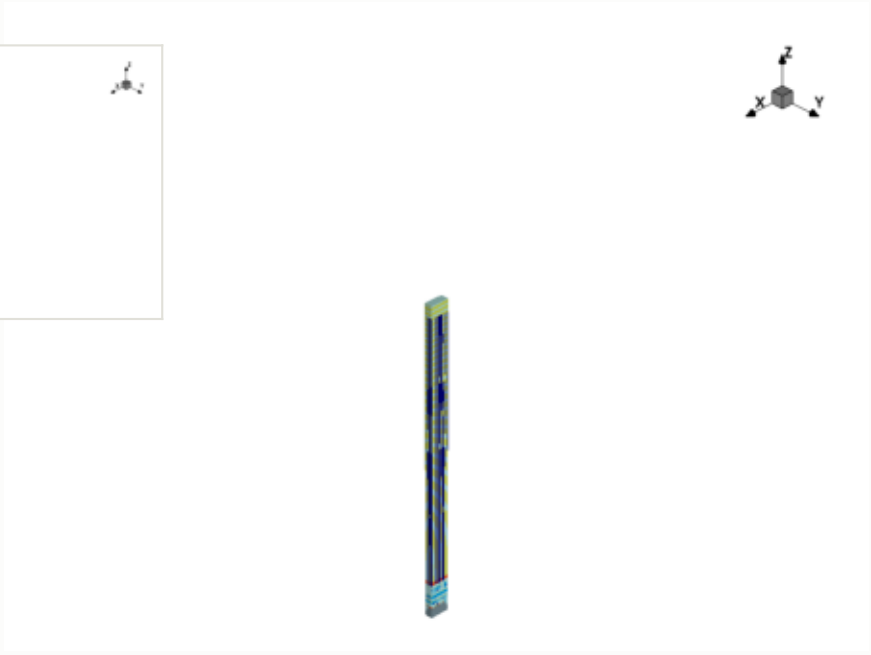

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

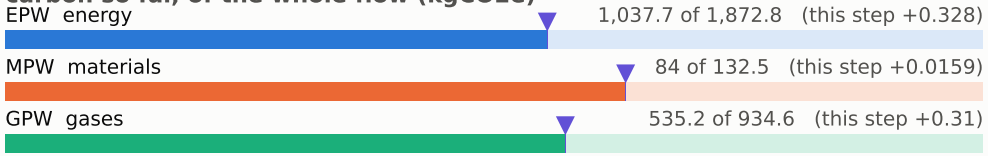

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

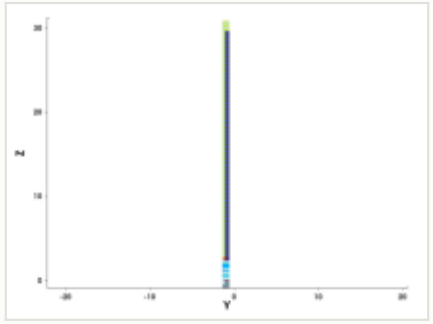

y cut at -1.035 µm

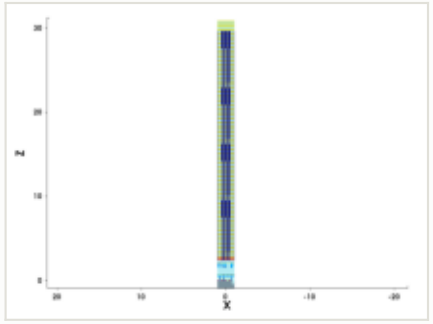

mask for this step

no mask for this step

steps by process area

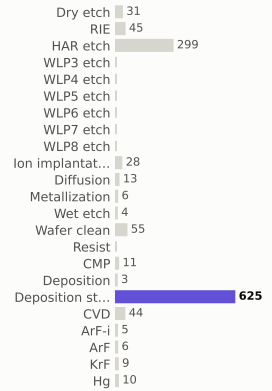

materials deposited (g)

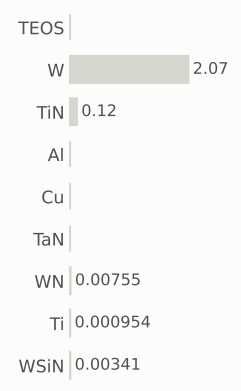

gases emitted (g)

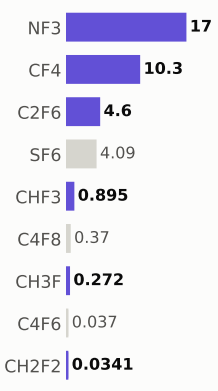

Step #15360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,657.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

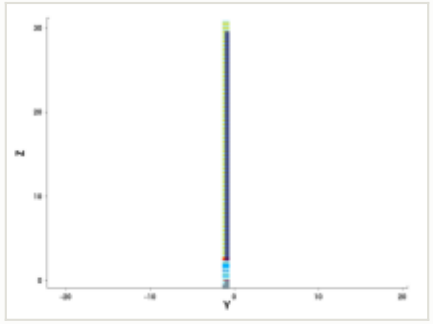

y cut at -1.035 µm

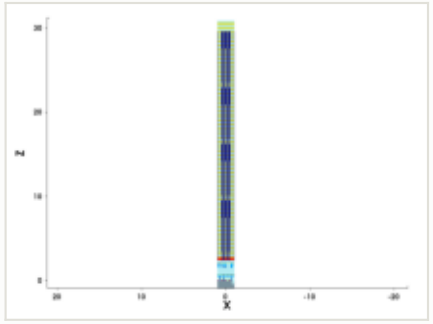

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

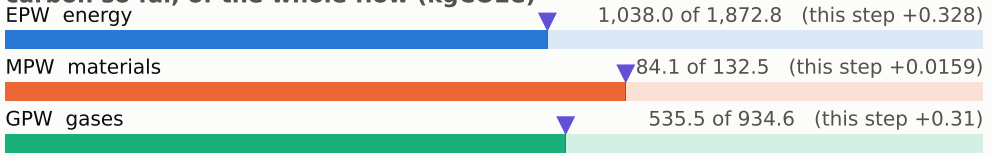

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

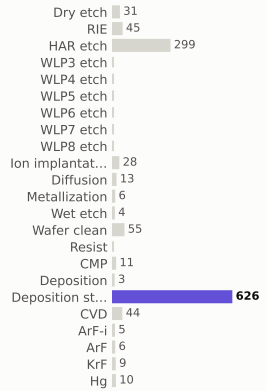

materials deposited (g)

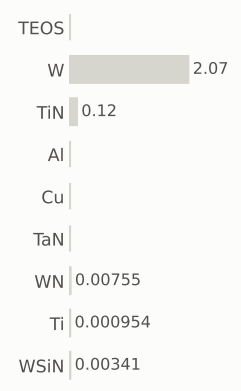

gases emitted (g)

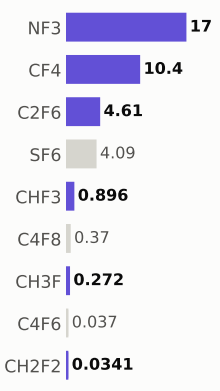

Step #15370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,658.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

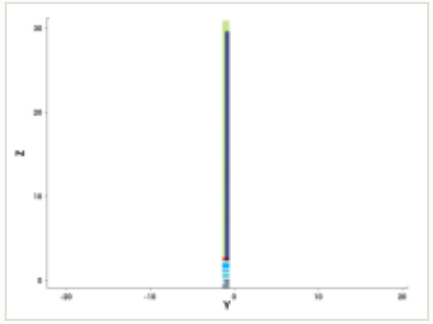

y cut at -1.035 µm

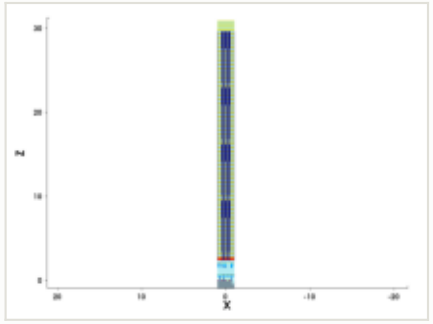

mask for this step

no mask for this step

steps by process area

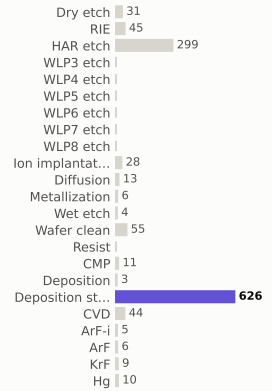

materials deposited (g)

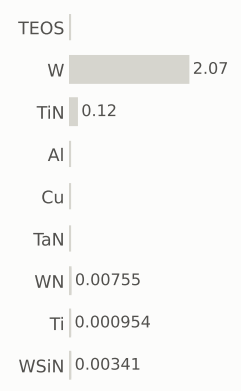

gases emitted (g)

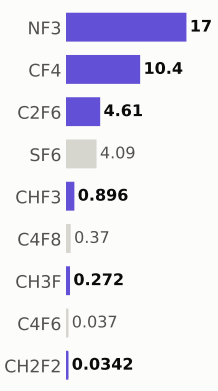

Step #15380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,658.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

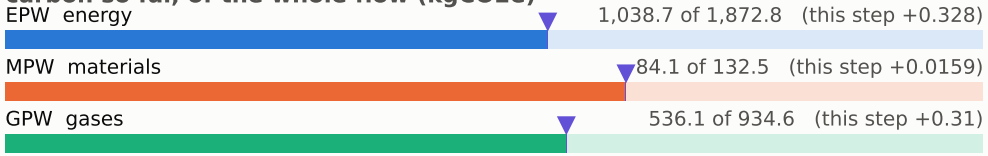

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

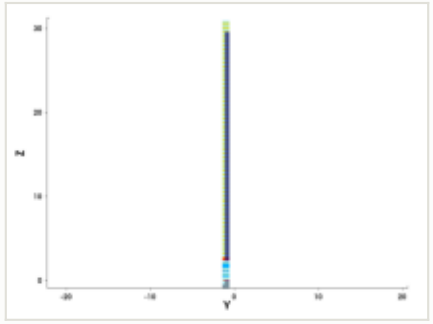

y cut at -1.035 µm

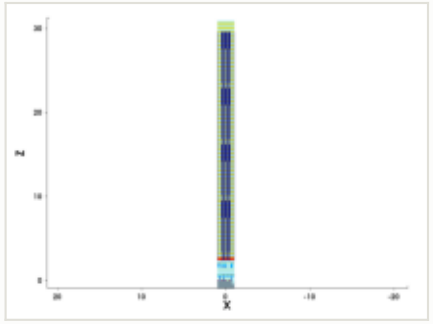

mask for this step

no mask for this step

steps by process area

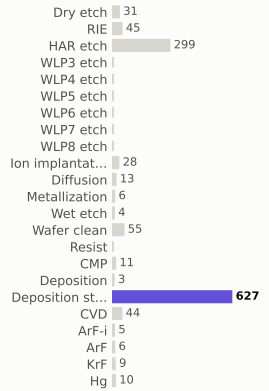

materials deposited (g)

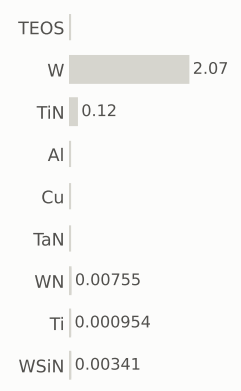

gases emitted (g)

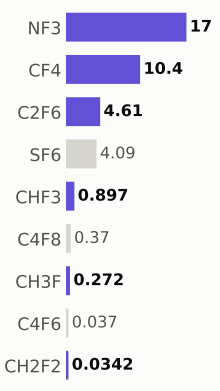

Step #15390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,659.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

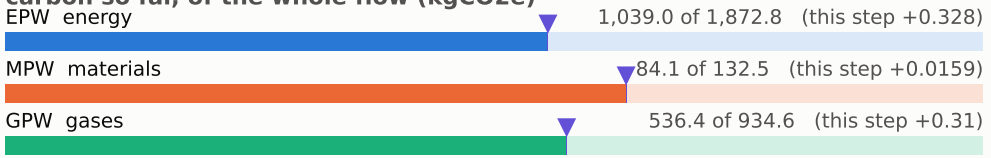

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

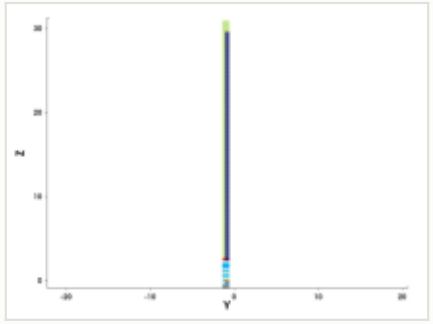

y cut at -1.035 µm

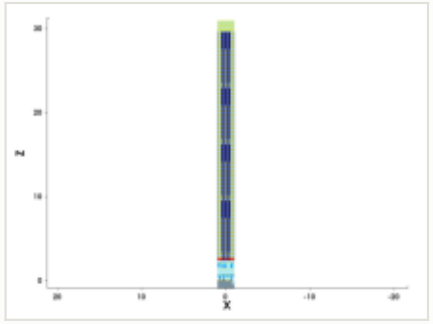

mask for this step

no mask for this step

steps by process area

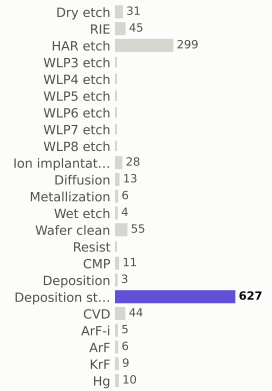

materials deposited (g)

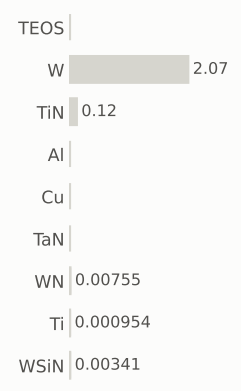

gases emitted (g)

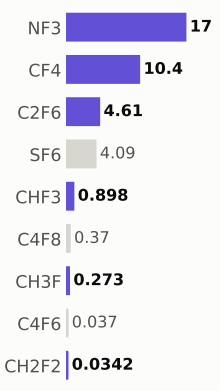

Step #15400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,660.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

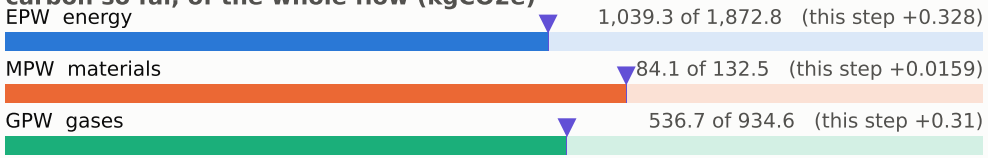

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

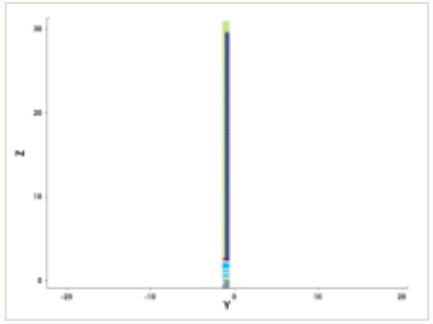

y cut at -1.035 µm

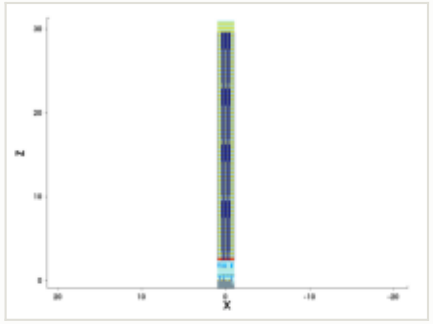

mask for this step

no mask for this step

steps by process area

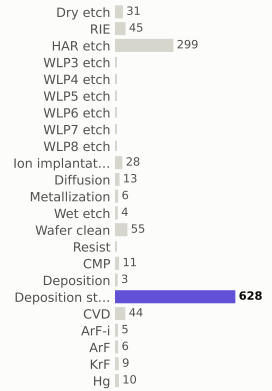

materials deposited (g)

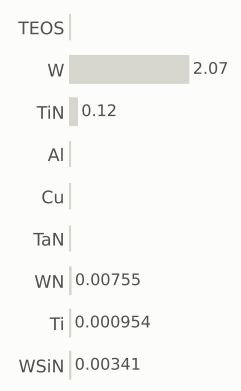

gases emitted (g)

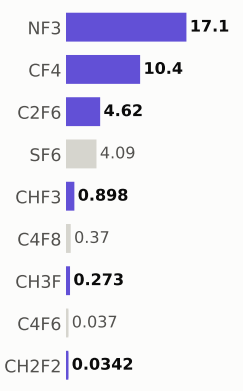

Step #15410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,660.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

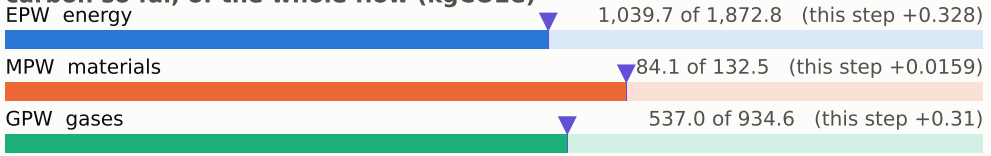

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

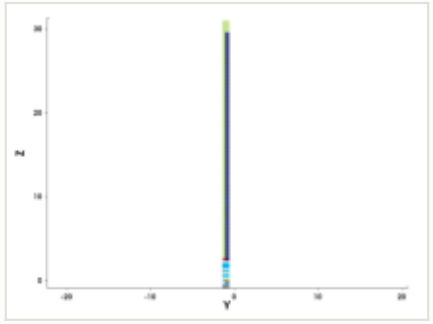

y cut at -1.035 µm

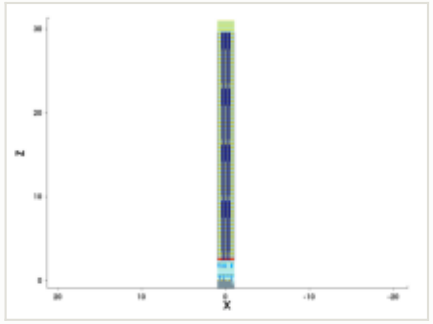

mask for this step

no mask for this step

steps by process area

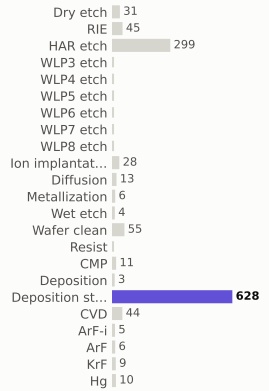

materials deposited (g)

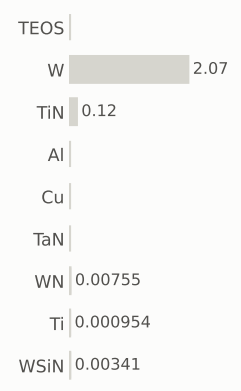

gases emitted (g)

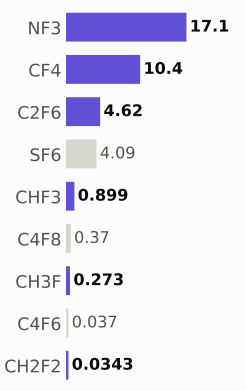

Step #15420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,661.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

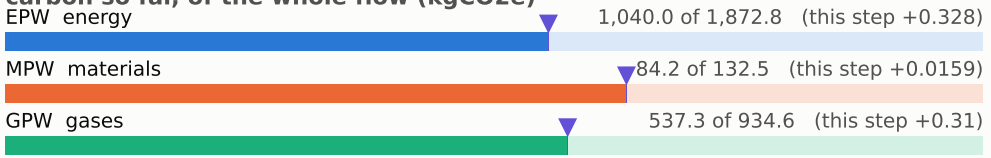

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

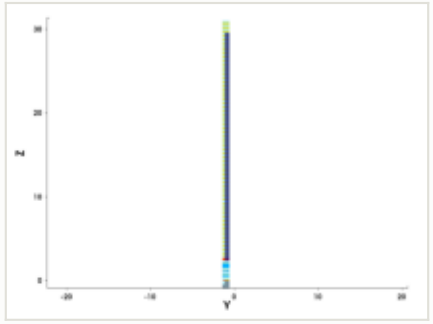

y cut at -1.035 µm

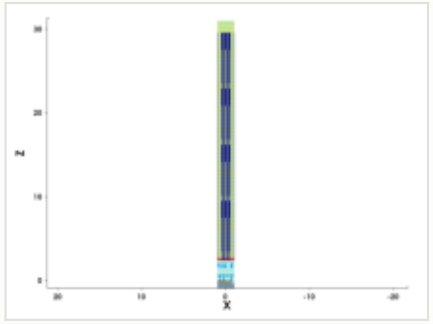

mask for this step

no mask for this step

steps by process area

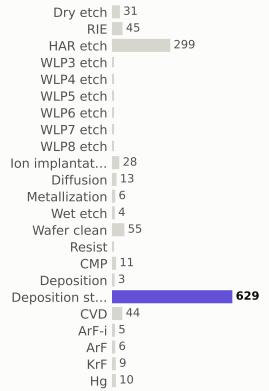

materials deposited (g)

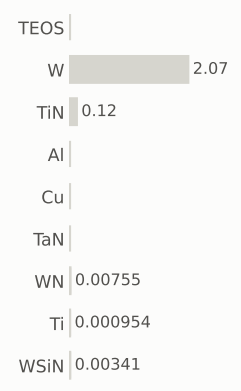

gases emitted (g)

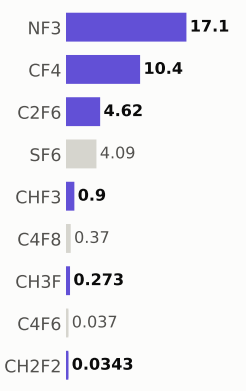

Step #15430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,662.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

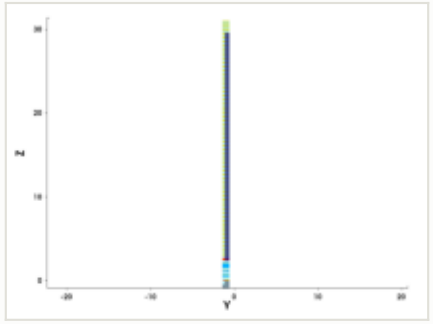

y cut at -1.035 µm

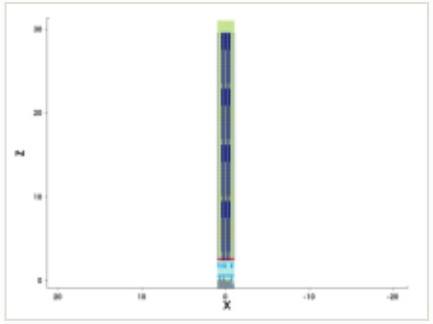

mask for this step

no mask for this step

steps by process area

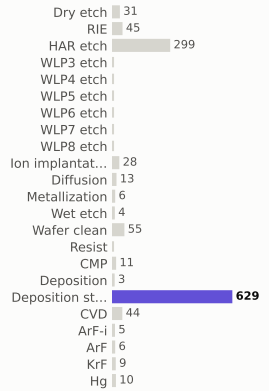

materials deposited (g)

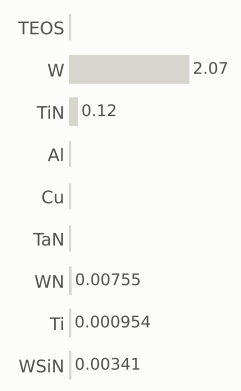

gases emitted (g)

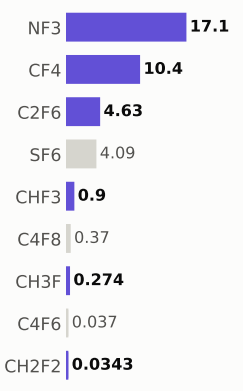

Step #15440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,662.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

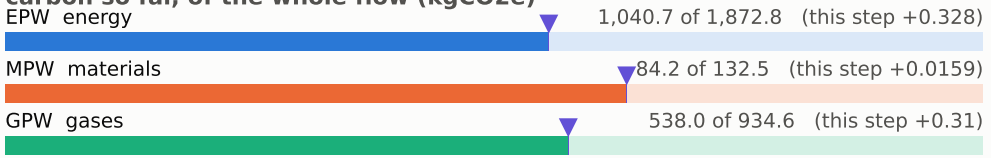

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

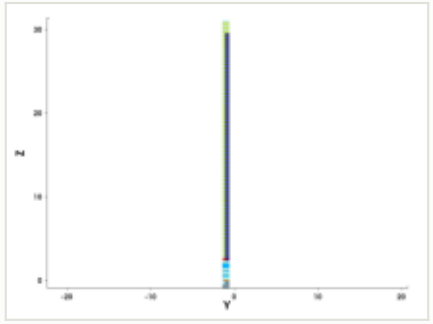

y cut at -1.035 µm

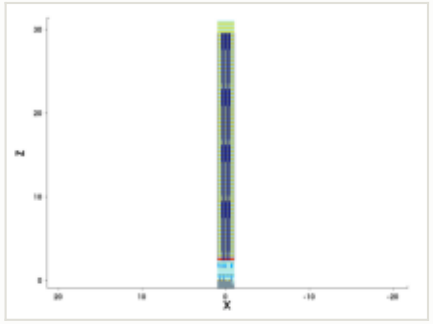

mask for this step

no mask for this step

steps by process area

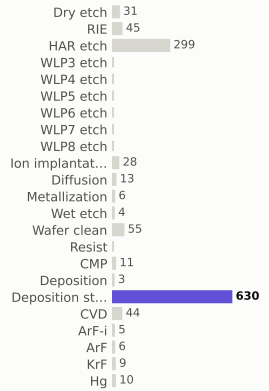

materials deposited (g)

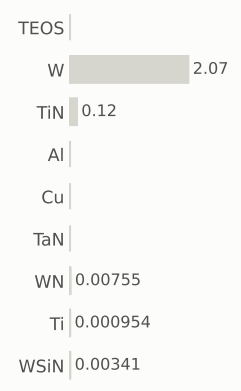

gases emitted (g)

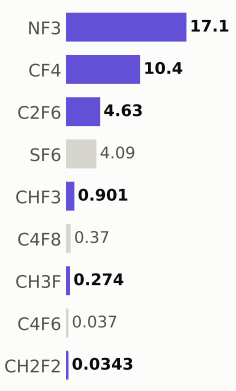

Step #15450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,663.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

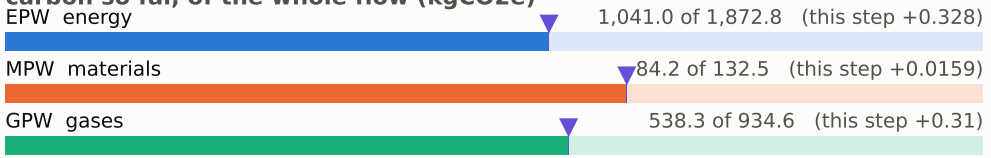

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

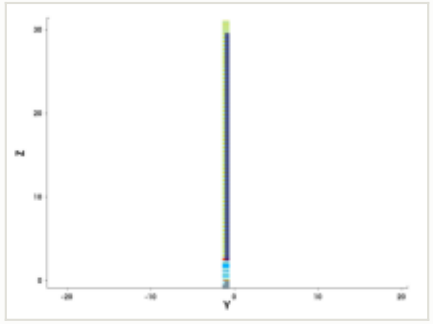

y cut at -1.035 µm

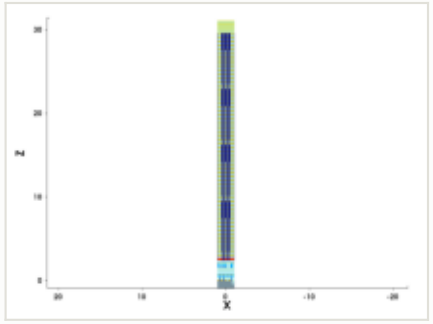

mask for this step

no mask for this step

steps by process area

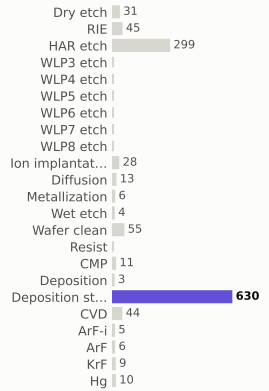

materials deposited (g)

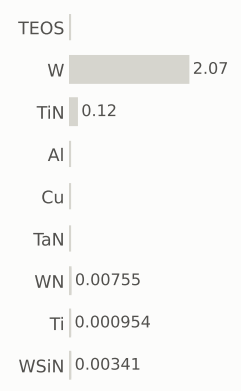

gases emitted (g)

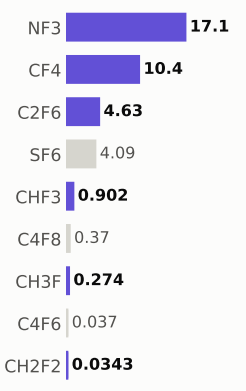

Step #15460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,664.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

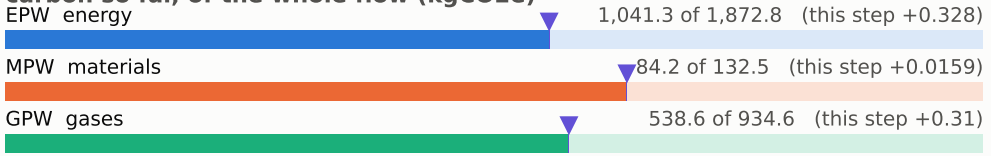

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

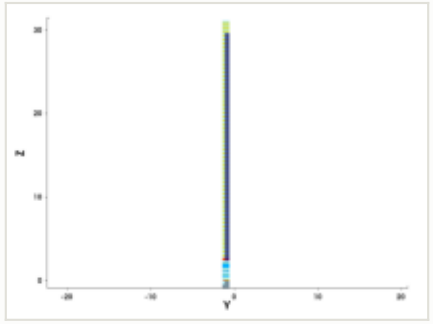

y cut at -1.035 µm

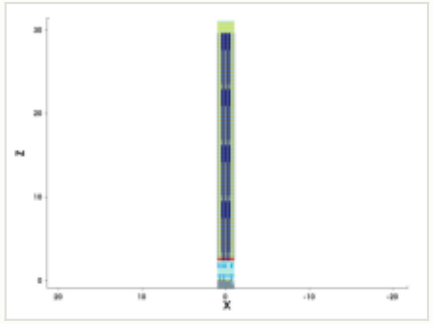

mask for this step

no mask for this step

steps by process area

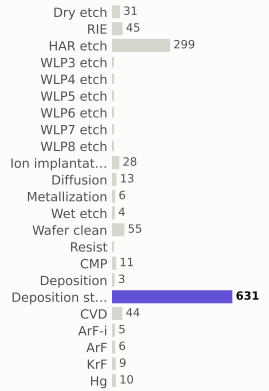

materials deposited (g)

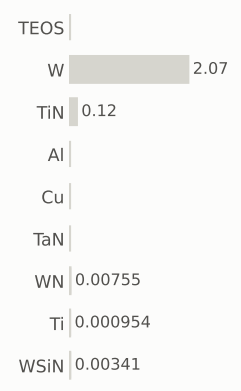

gases emitted (g)

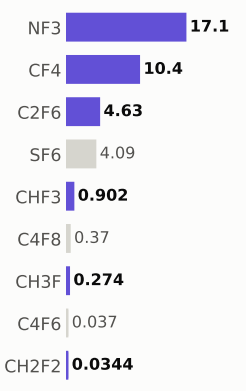

Step #15470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,664.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

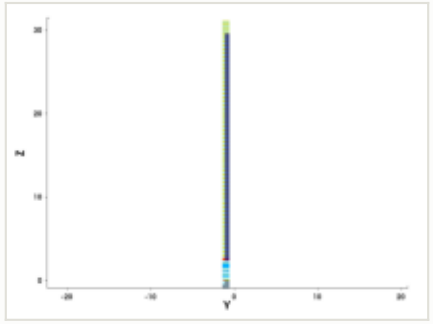

y cut at -1.035 µm

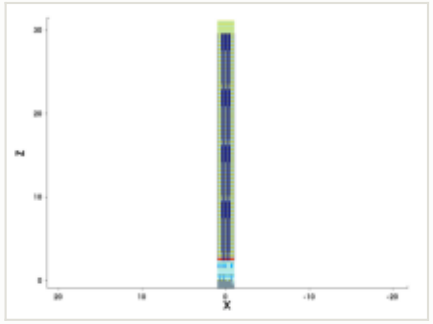

mask for this step

no mask for this step

steps by process area

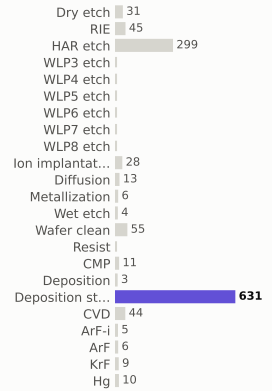

materials deposited (g)

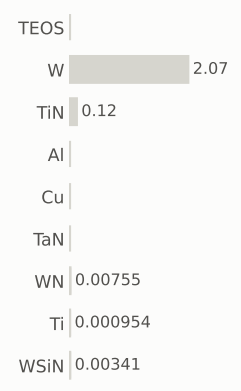

gases emitted (g)

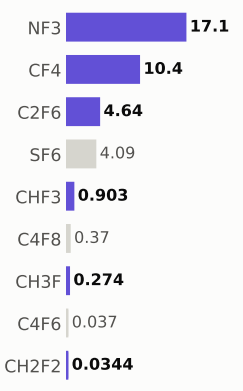

Step #15480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,665.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

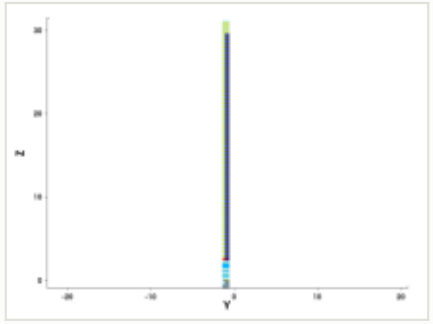

y cut at -1.035 µm

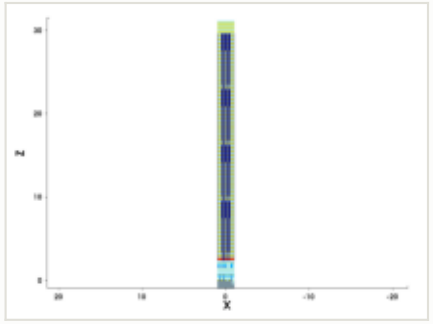

mask for this step

no mask for this step

steps by process area

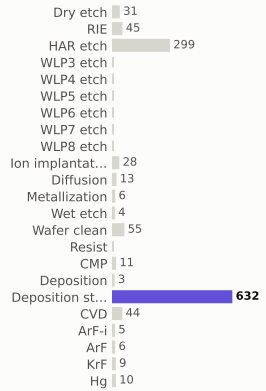

materials deposited (g)

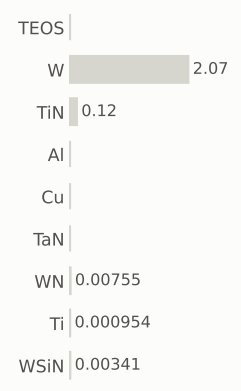

gases emitted (g)

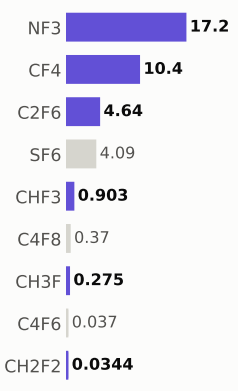

Step #15490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,666.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

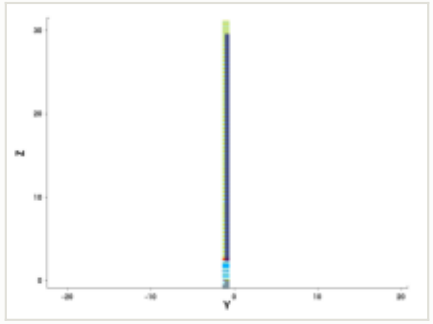

y cut at -1.035 µm

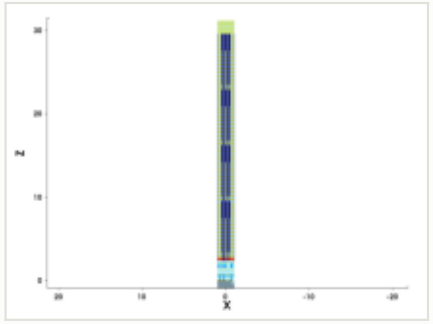

mask for this step

no mask for this step

steps by process area

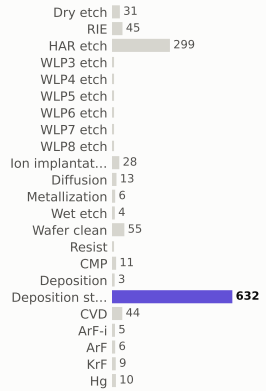

materials deposited (g)

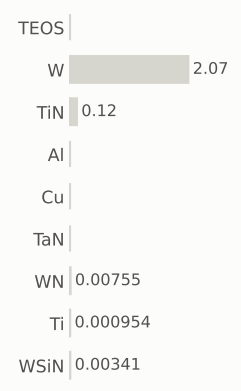

gases emitted (g)

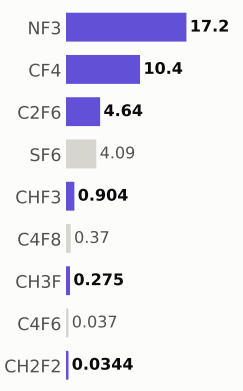

Step #15500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,666.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

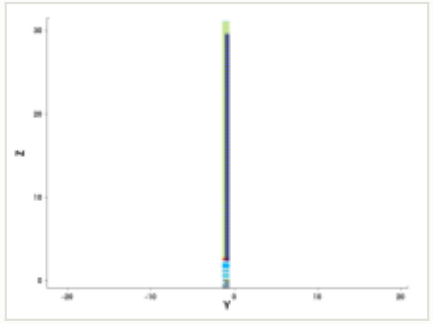

y cut at -1.035 µm

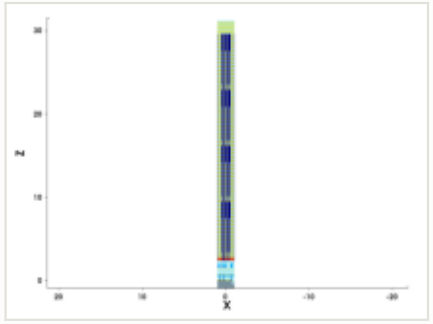

mask for this step

no mask for this step

steps by process area

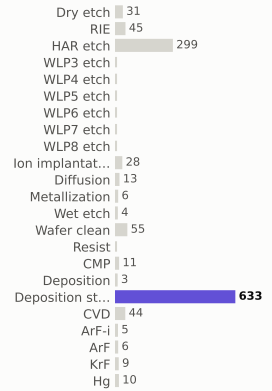

materials deposited (g)

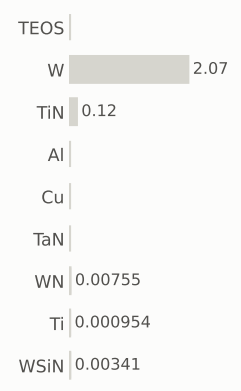

gases emitted (g)

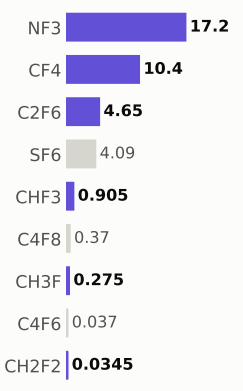

Step #15510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,667.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

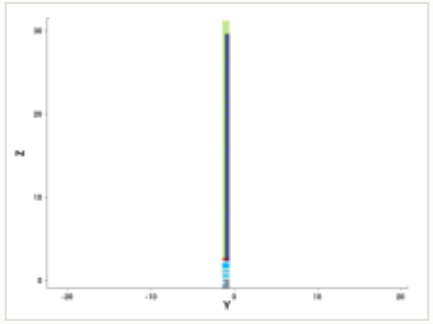

y cut at -1.035 µm

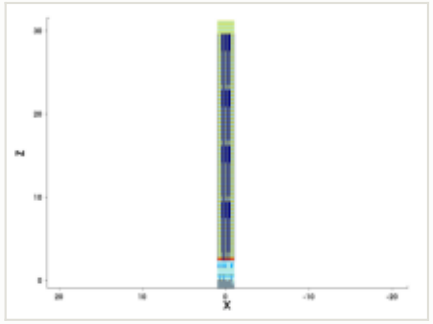

mask for this step

no mask for this step

steps by process area

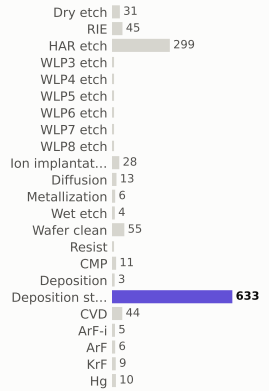

materials deposited (g)

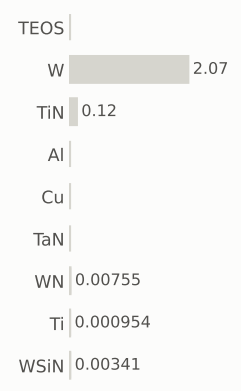

gases emitted (g)

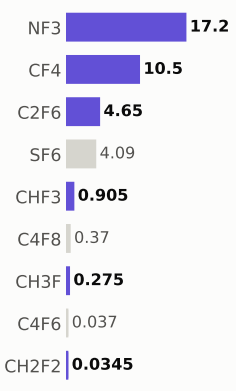

Step #15520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,668.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

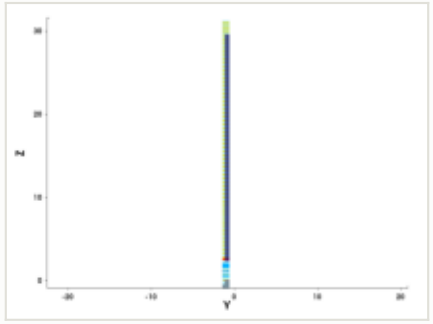

y cut at -1.035 µm

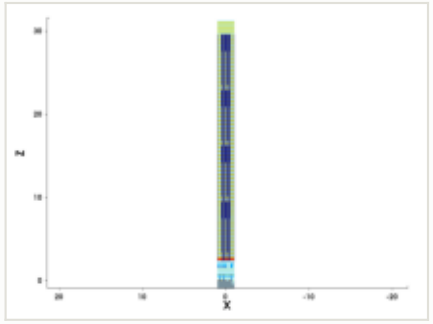

mask for this step

no mask for this step

steps by process area

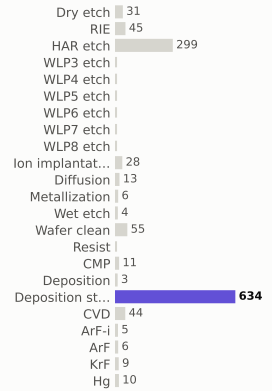

materials deposited (g)

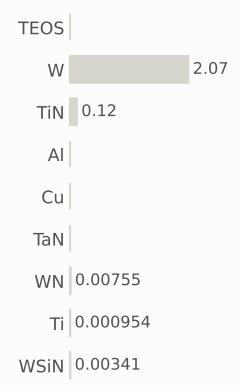

gases emitted (g)

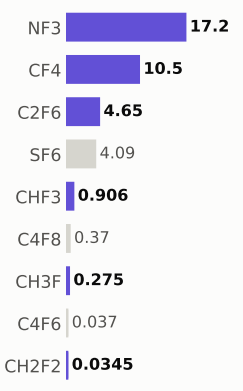

Step #15530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,668.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

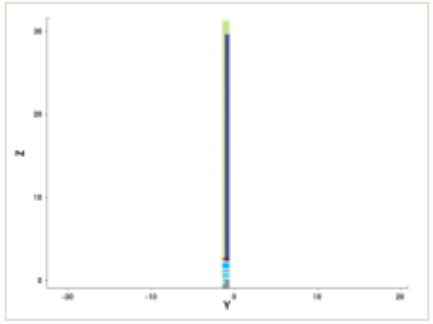

y cut at -1.035 µm

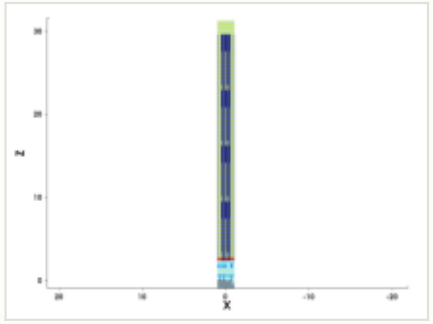

mask for this step

no mask for this step

steps by process area

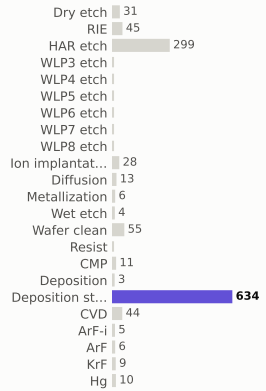

materials deposited (g)

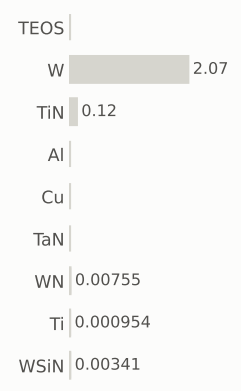

gases emitted (g)

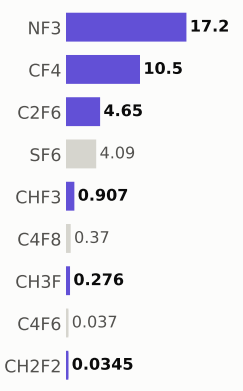

Step #15540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,669.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

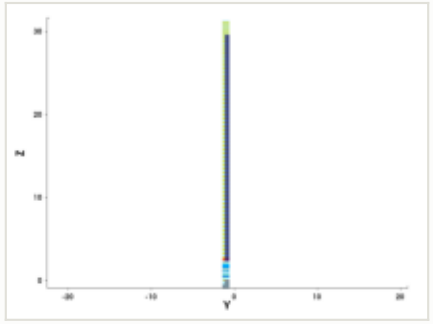

y cut at -1.035 µm

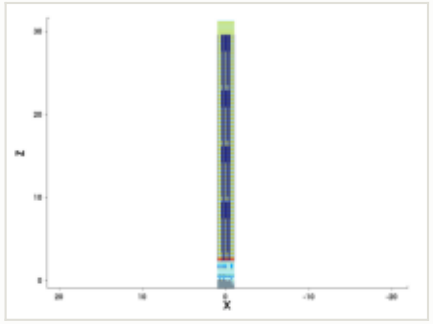

mask for this step

no mask for this step

steps by process area

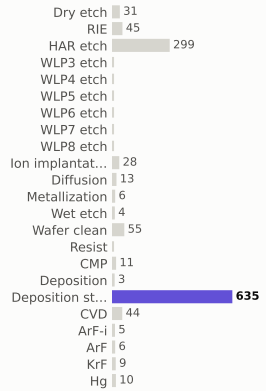

materials deposited (g)

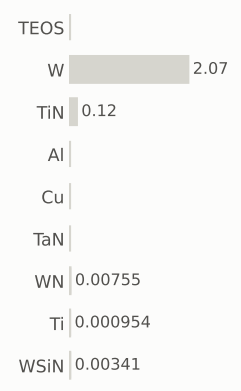

gases emitted (g)

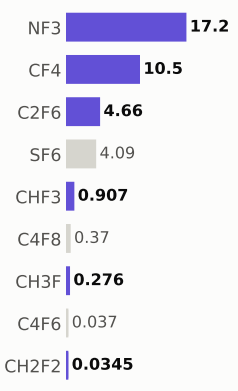

Step #15550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,670.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

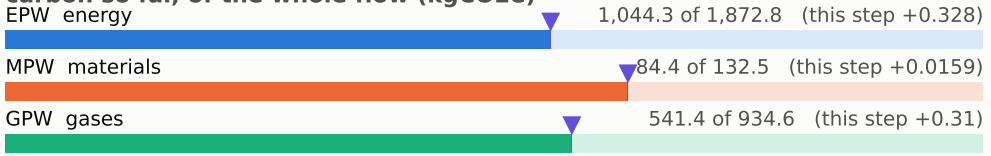

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

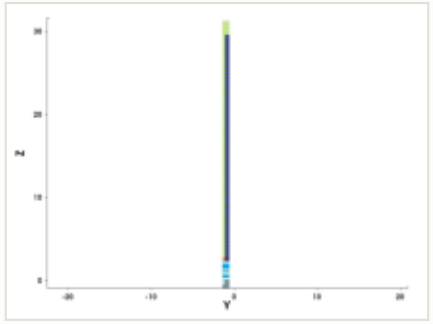

y cut at -1.035 µm

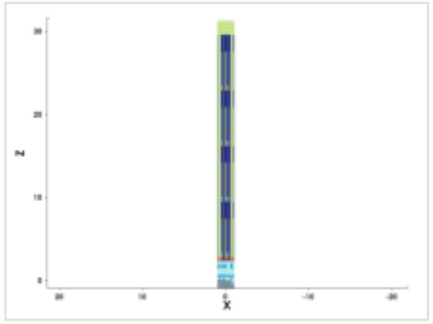

mask for this step

no mask for this step

steps by process area

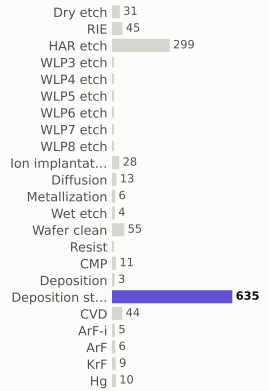

materials deposited (g)

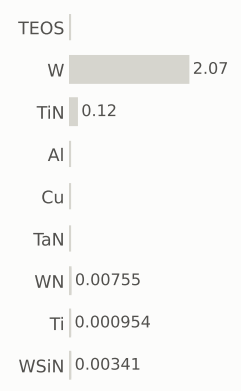

gases emitted (g)

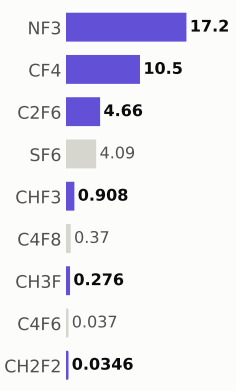

Step #15560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,670.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

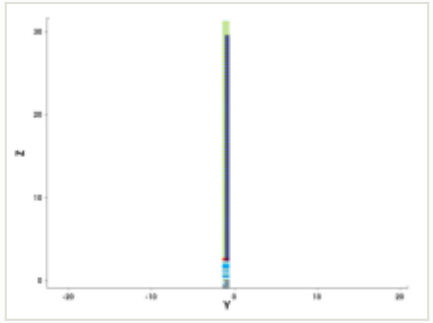

y cut at -1.035 µm

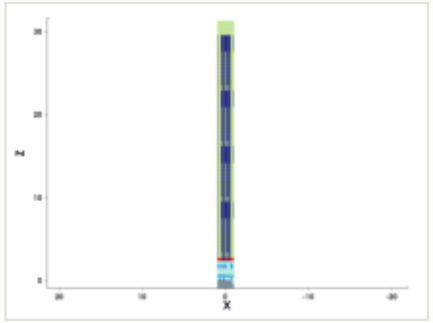

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

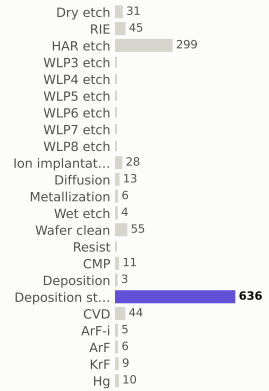

materials deposited (g)

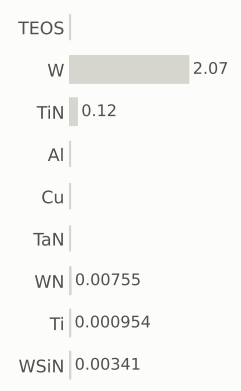

gases emitted (g)

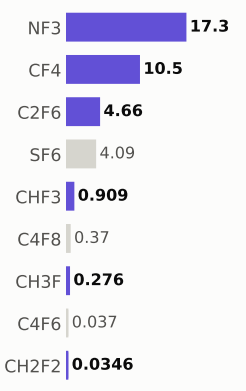

Step #15570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,671.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

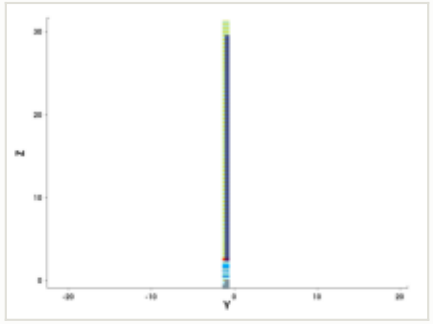

y cut at -1.035 µm

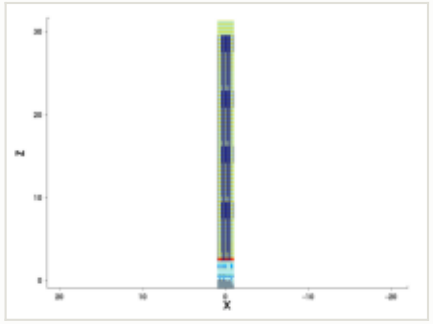

mask for this step

no mask for this step

steps by process area

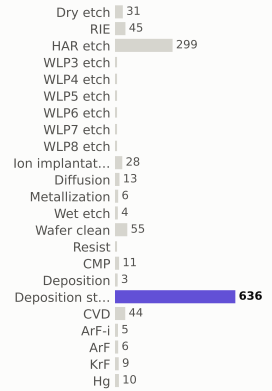

materials deposited (g)

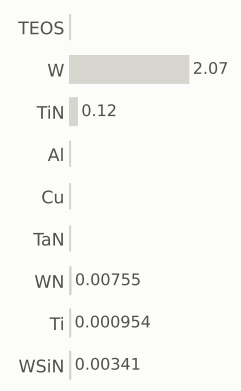

gases emitted (g)

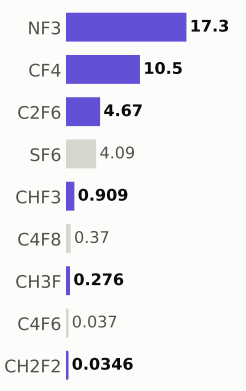

Step #15580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,672.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

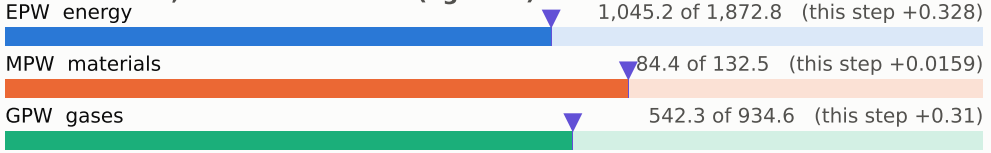

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

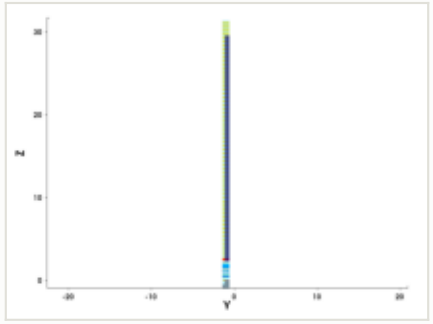

y cut at -1.035 µm

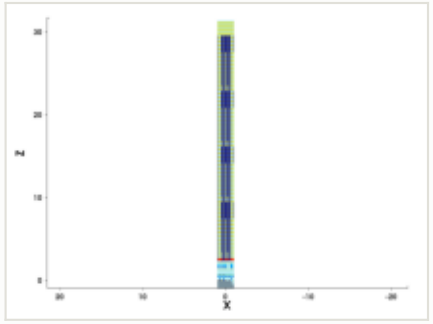

mask for this step

no mask for this step

steps by process area

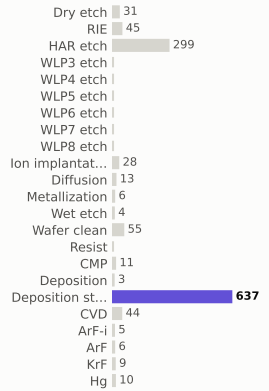

materials deposited (g)

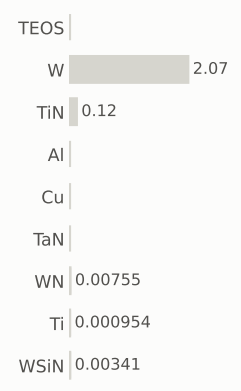

gases emitted (g)

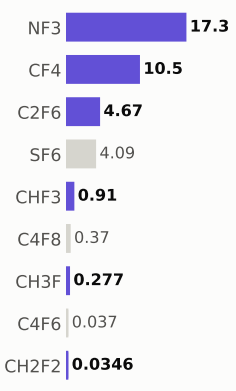

Step #15590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,672.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

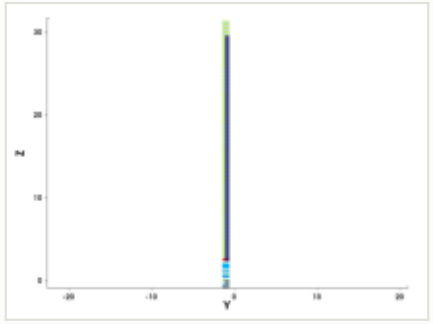

y cut at -1.035 µm

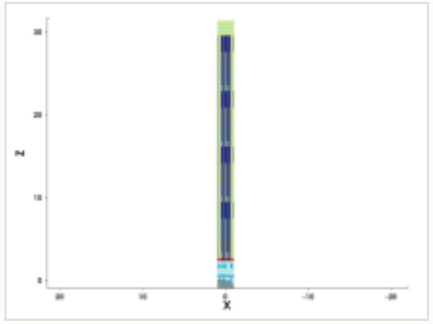

mask for this step

no mask for this step

steps by process area

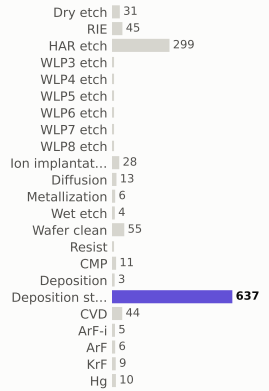

materials deposited (g)

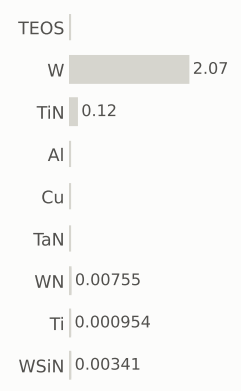

gases emitted (g)

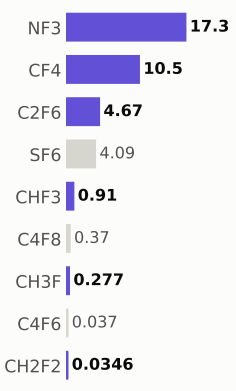

Step #15600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,673.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

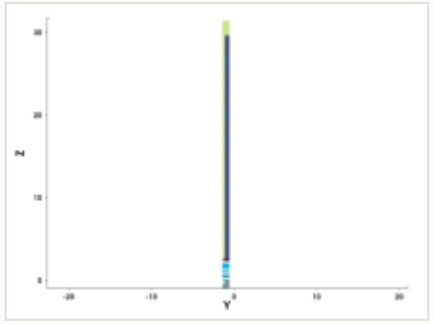

y cut at -1.035 µm

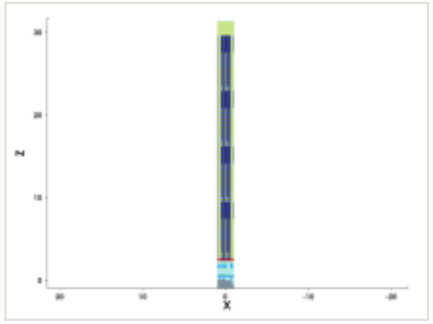

mask for this step

no mask for this step

steps by process area

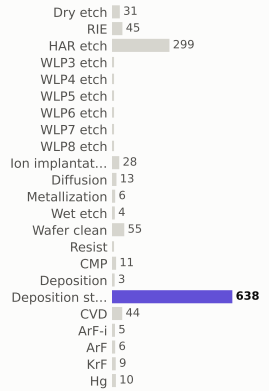

materials deposited (g)

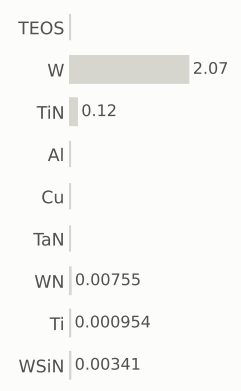

gases emitted (g)

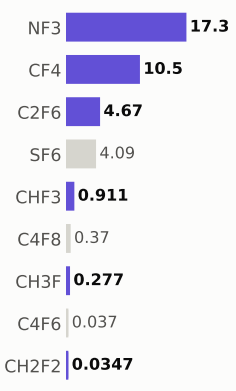

Step #15610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,673.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

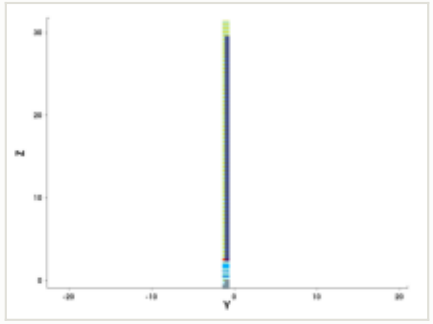

y cut at -1.035 µm

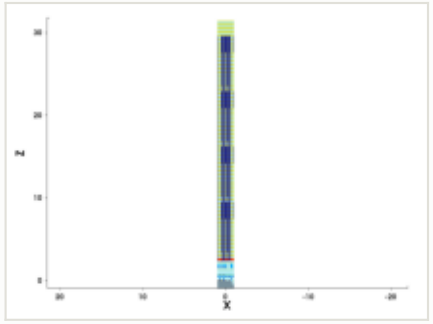

mask for this step

no mask for this step

steps by process area

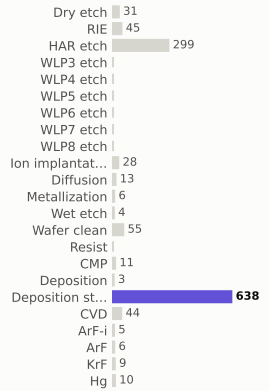

materials deposited (g)

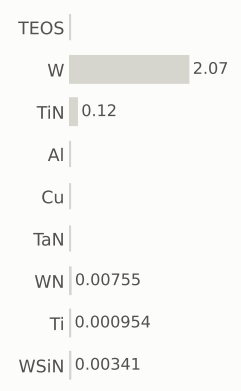

gases emitted (g)

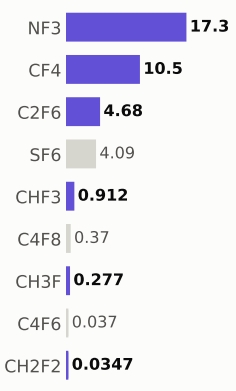

Step #15620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,674.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

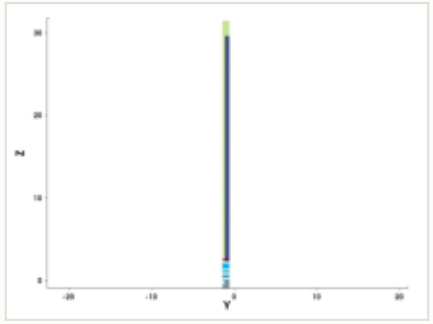

y cut at -1.035 µm

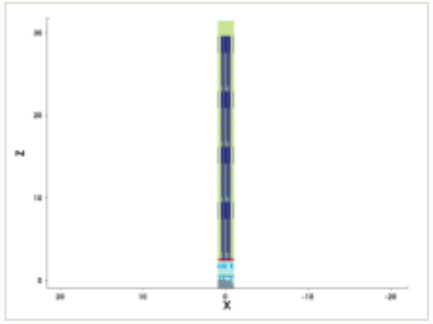

mask for this step

no mask for this step

steps by process area

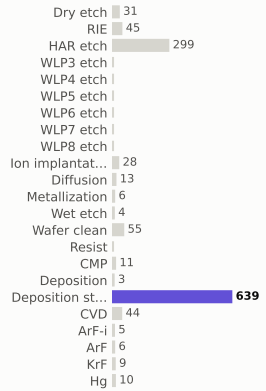

materials deposited (g)

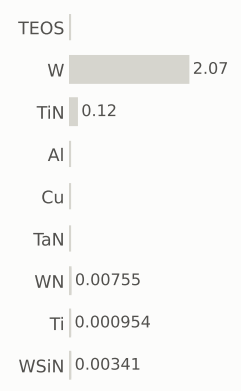

gases emitted (g)

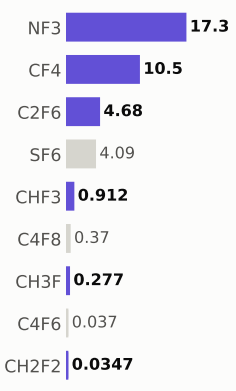

Step #15630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,675.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

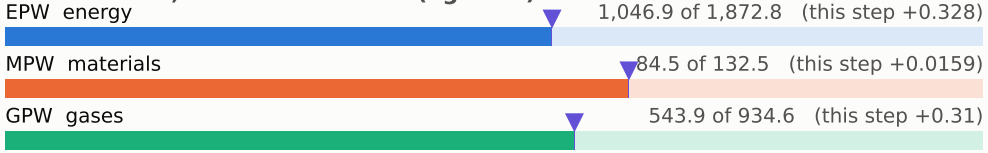

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

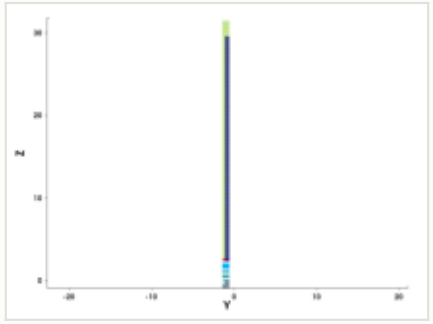

y cut at -1.035 µm

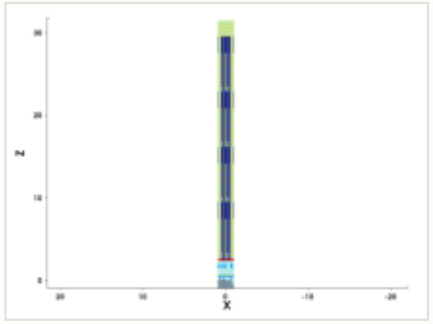

mask for this step

no mask for this step

steps by process area

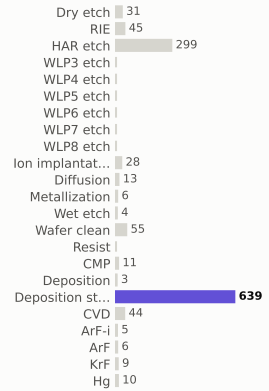

materials deposited (g)

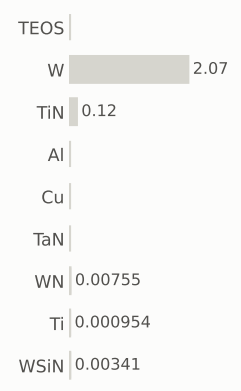

gases emitted (g)

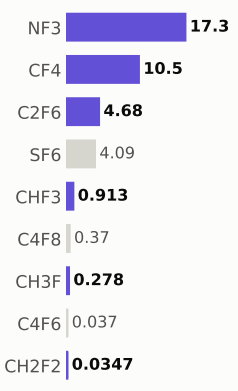

Step #15640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,675.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

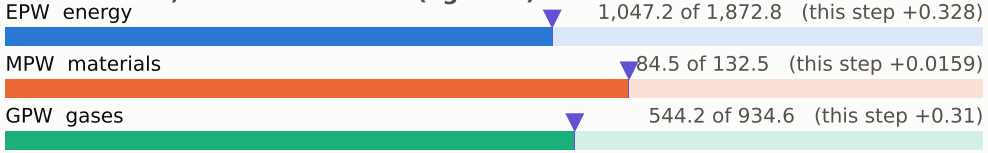

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

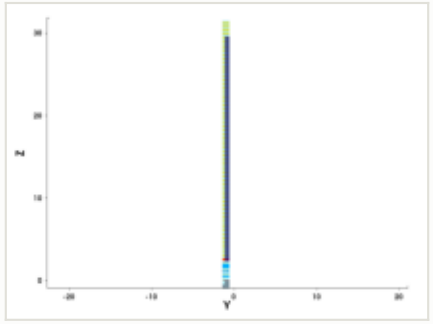

y cut at -1.035 µm

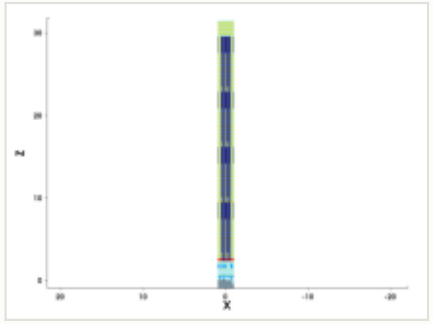

mask for this step

no mask for this step

steps by process area

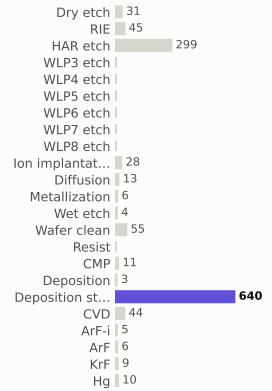

materials deposited (g)

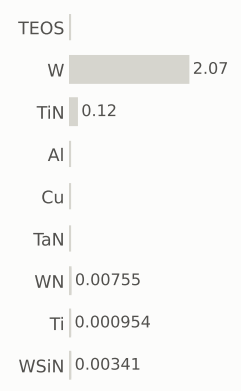

gases emitted (g)

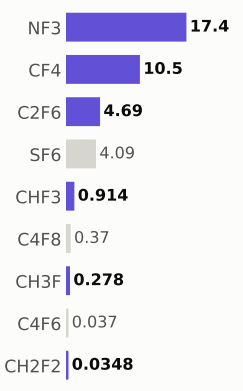

Step #15650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,676.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

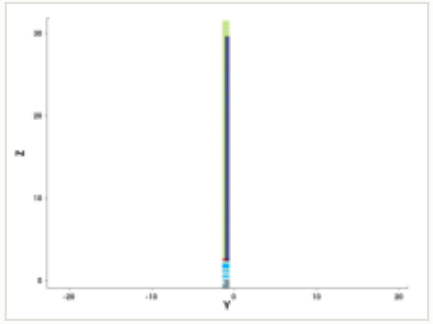

y cut at -1.035 µm

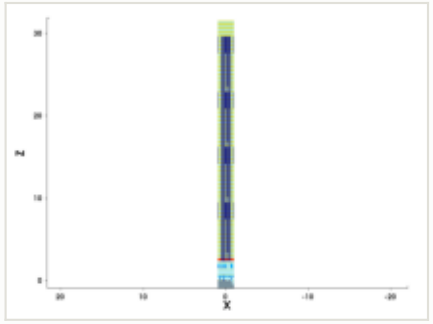

mask for this step

no mask for this step

steps by process area

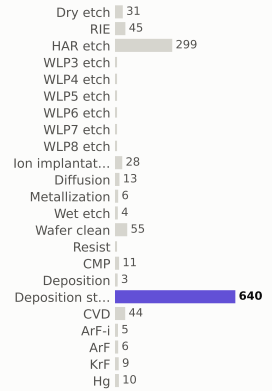

materials deposited (g)

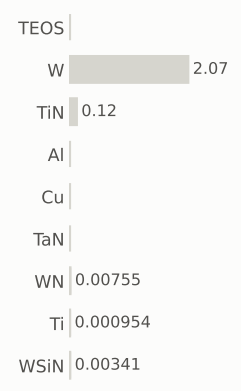

gases emitted (g)

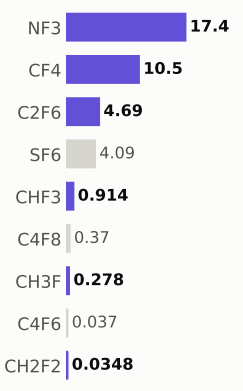

Step #15660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,677.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

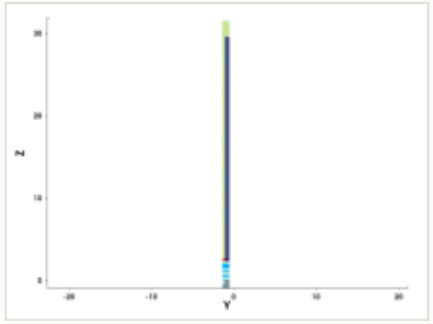

y cut at -1.035 µm

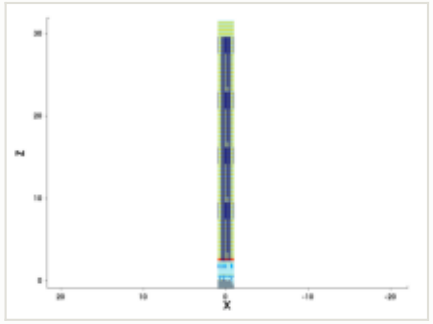

mask for this step

no mask for this step

steps by process area

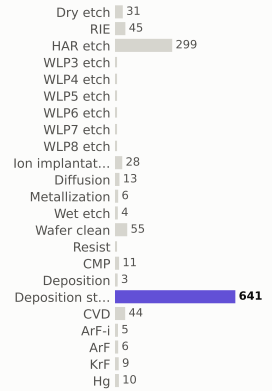

materials deposited (g)

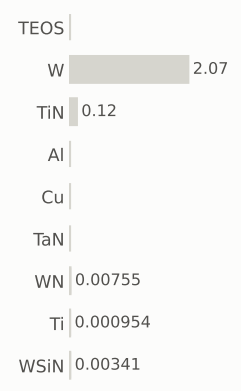

gases emitted (g)

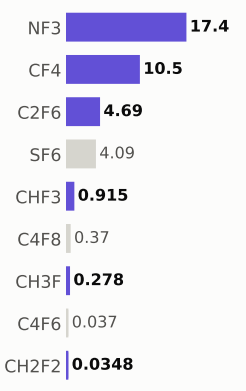

Step #15670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,677.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

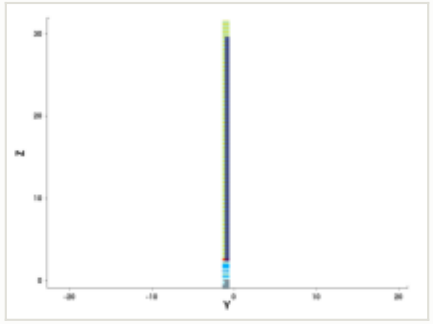

y cut at -1.035 µm

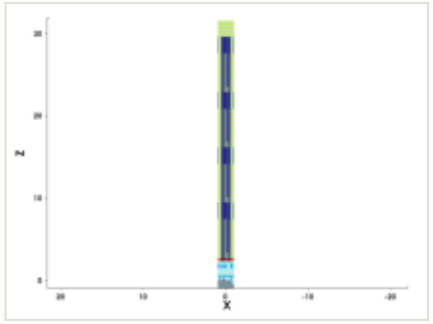

mask for this step

no mask for this step

steps by process area

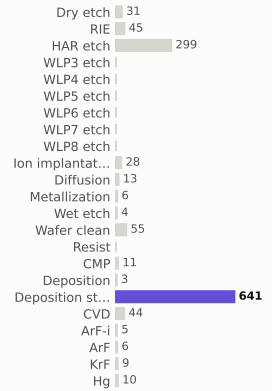

materials deposited (g)

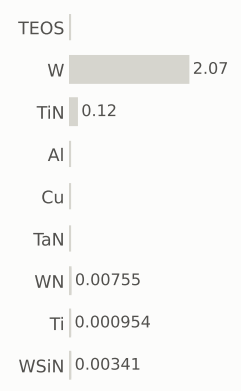

gases emitted (g)

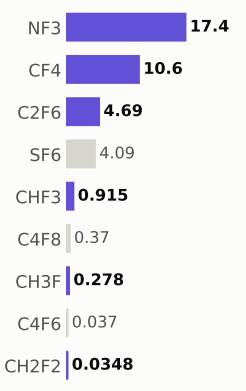

Step #15680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,678.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

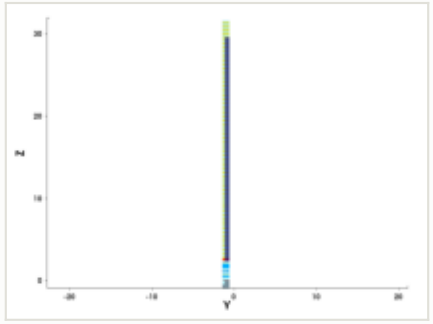

y cut at -1.035 µm

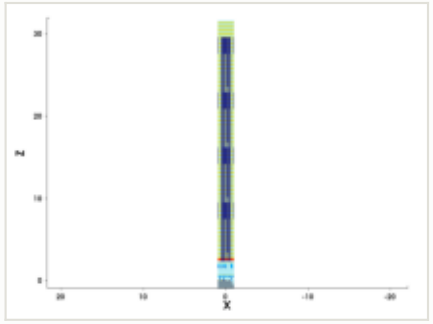

mask for this step

no mask for this step

steps by process area

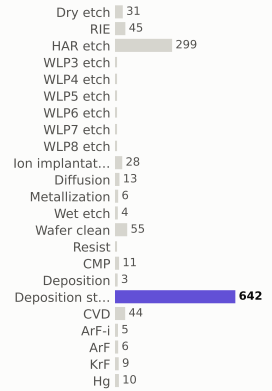

materials deposited (g)

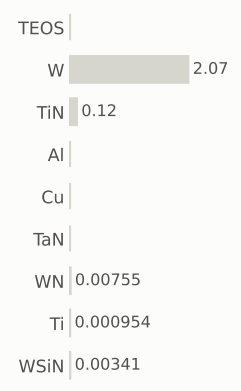

gases emitted (g)

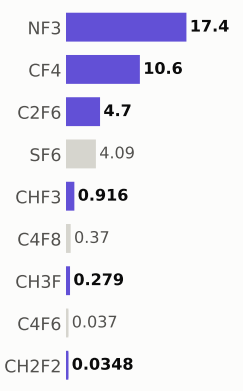

Step #15690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,679.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

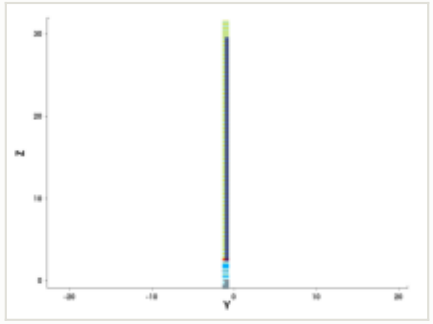

y cut at -1.035 µm

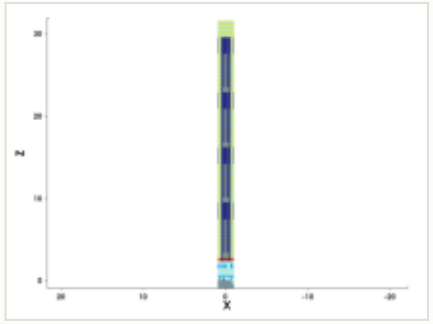

mask for this step

no mask for this step

steps by process area

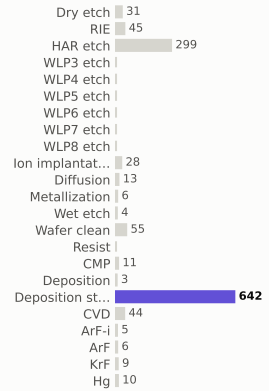

materials deposited (g)

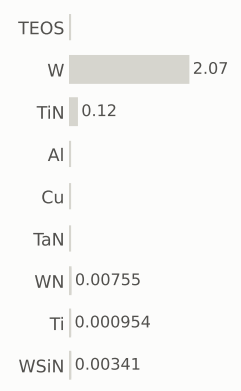

gases emitted (g)

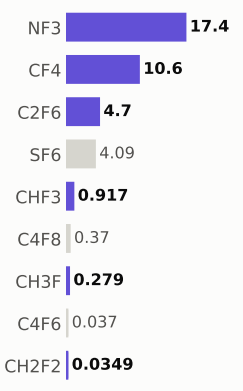

Step #15700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,679.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

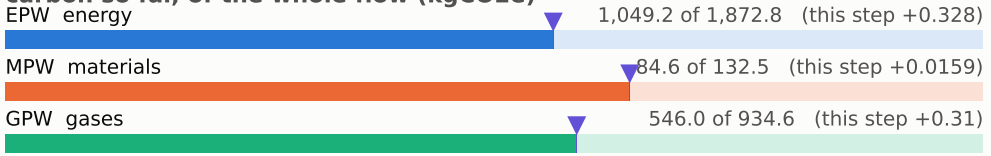

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

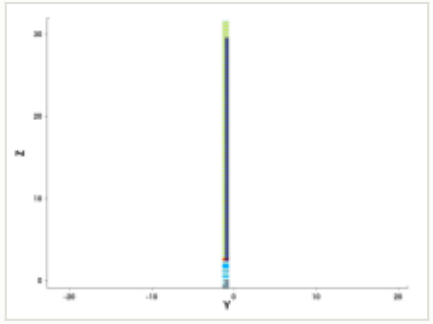

y cut at -1.035 µm

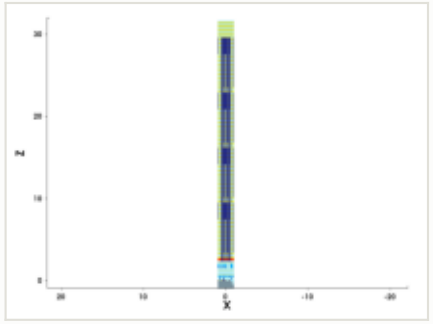

mask for this step

no mask for this step

steps by process area

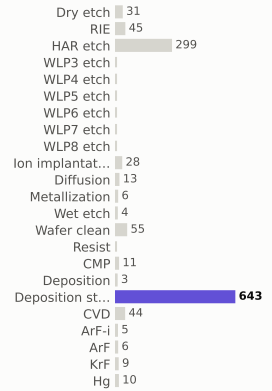

materials deposited (g)

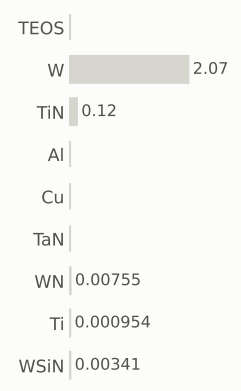

gases emitted (g)

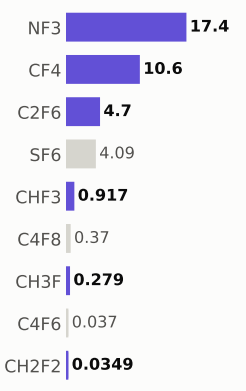

Step #15710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,680.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

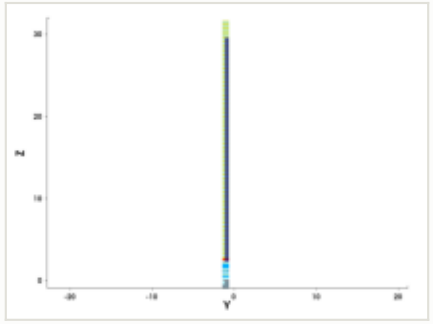

y cut at -1.035 µm

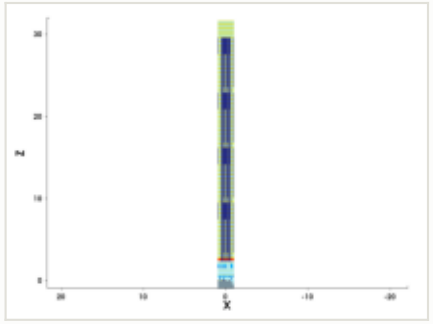

mask for this step

no mask for this step

steps by process area

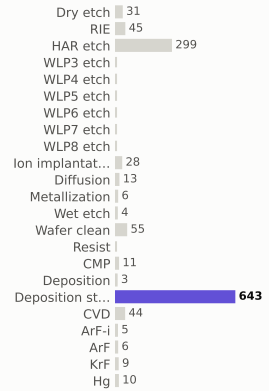

materials deposited (g)

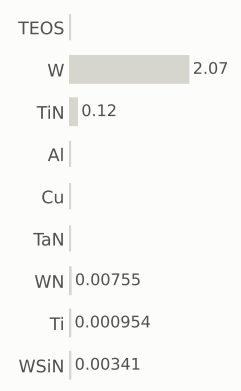

gases emitted (g)

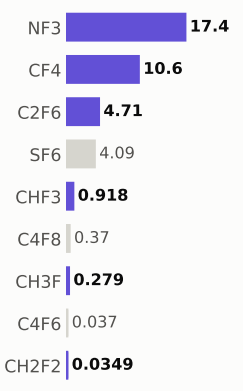

Step #15720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,681.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

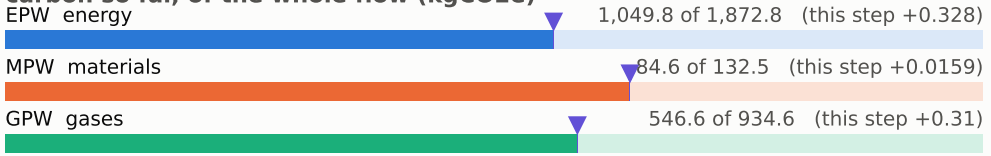

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

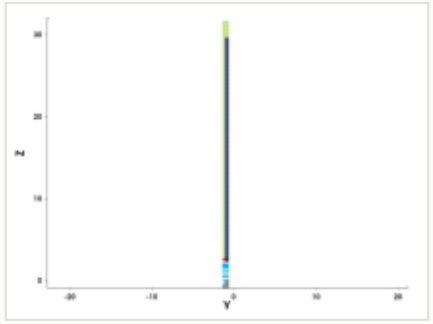

y cut at -1.035 µm

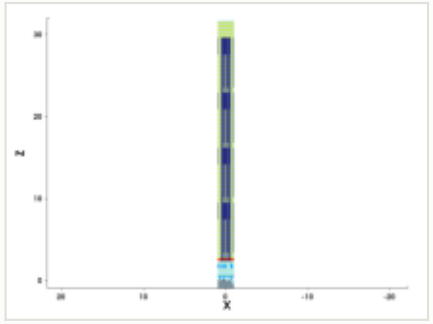

mask for this step

no mask for this step

steps by process area

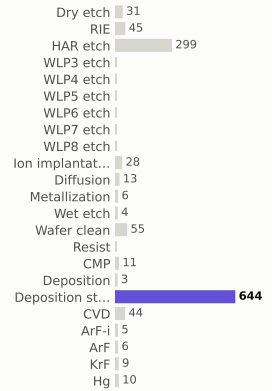

materials deposited (g)

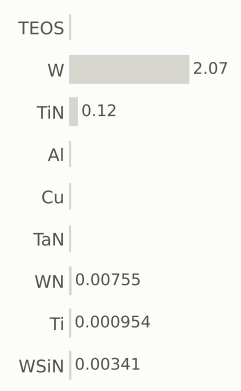

gases emitted (g)

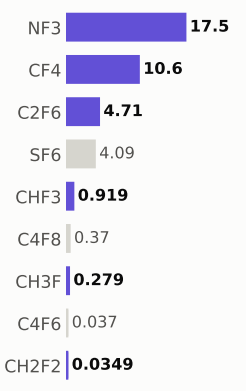

Step #15730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,681.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

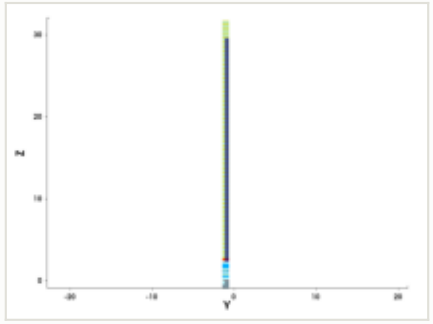

y cut at -1.035 µm

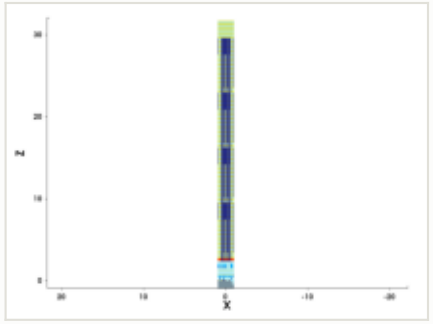

mask for this step

no mask for this step

steps by process area

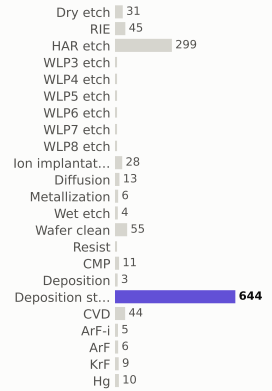

materials deposited (g)

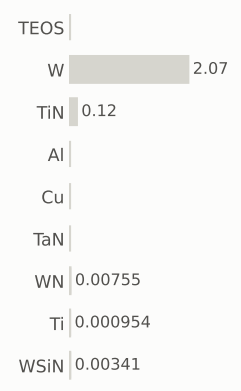

gases emitted (g)

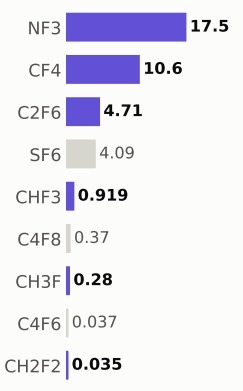

Step #15740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,682.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

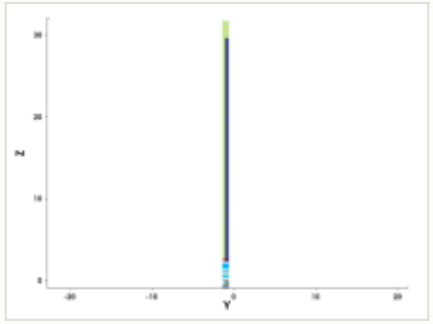

y cut at -1.035 µm

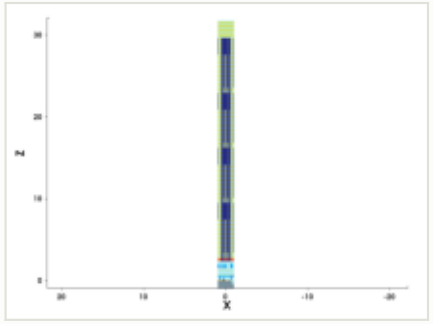

mask for this step

no mask for this step

steps by process area

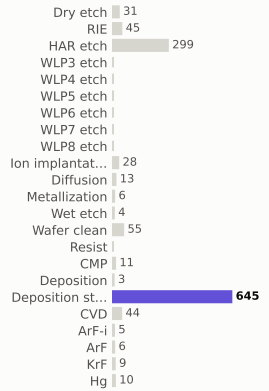

materials deposited (g)

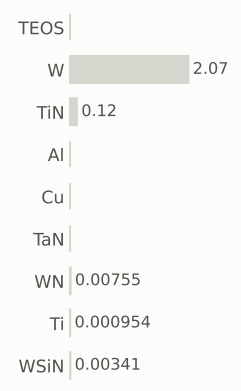

gases emitted (g)

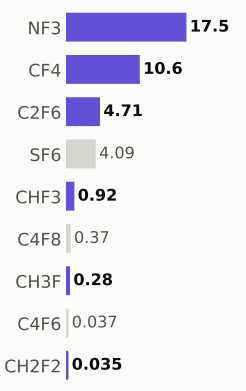

Step #15750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,683.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

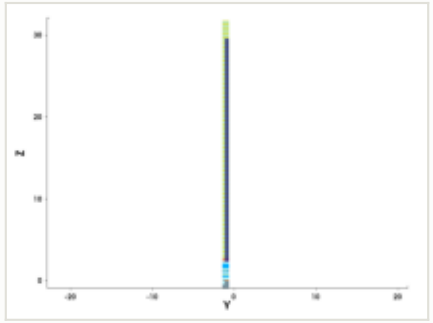

y cut at -1.035 µm

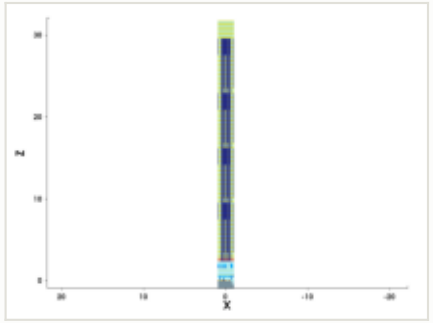

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

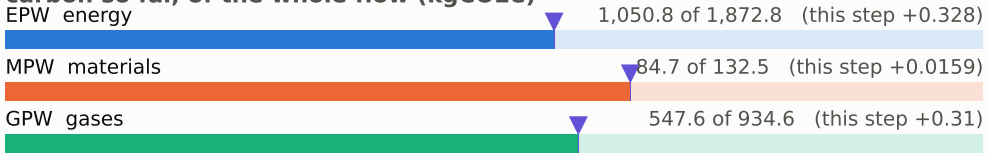

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

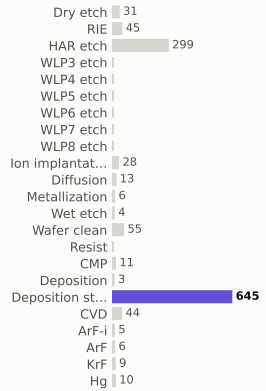

materials deposited (g)

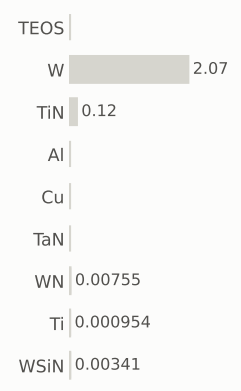

gases emitted (g)

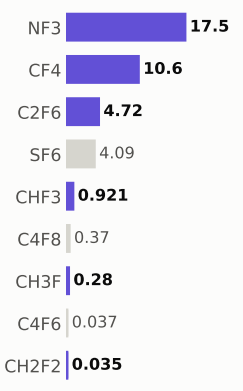

Step #15760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,683.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

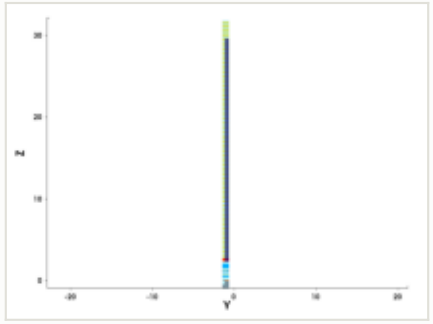

y cut at -1.035 µm

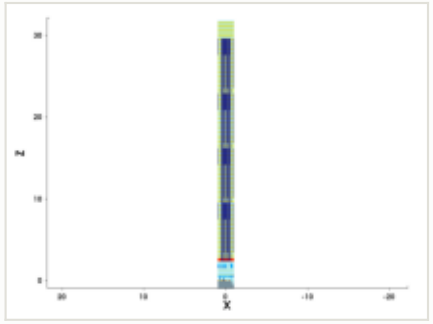

mask for this step

no mask for this step

steps by process area

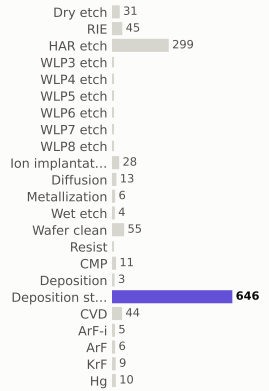

materials deposited (g)

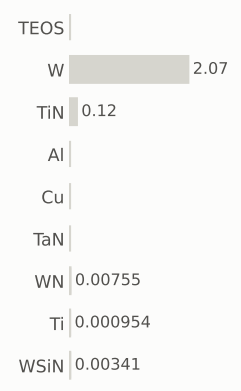

gases emitted (g)

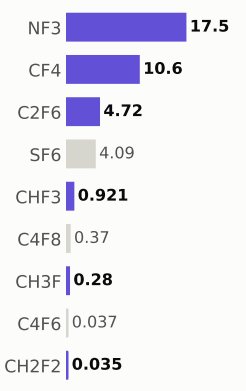

Step #15770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,684.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

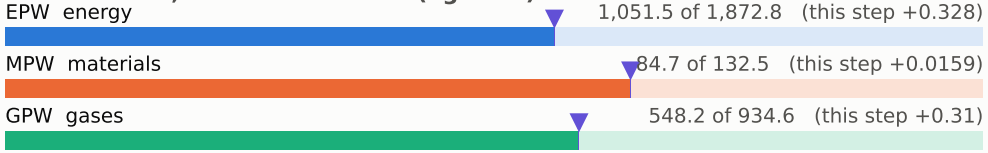

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

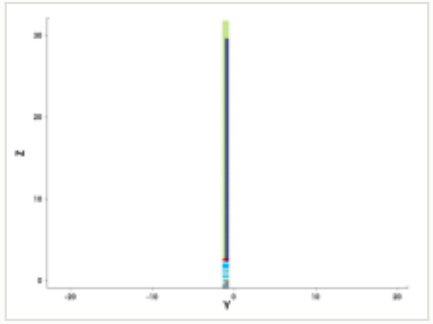

y cut at -1.035 µm

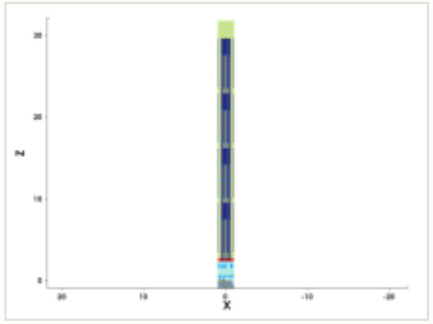

mask for this step

no mask for this step

steps by process area

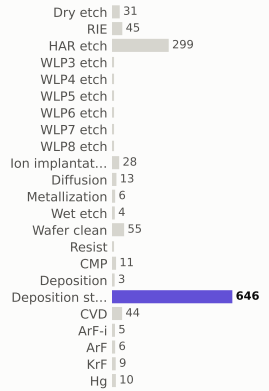

materials deposited (g)

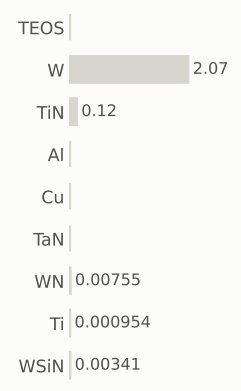

gases emitted (g)

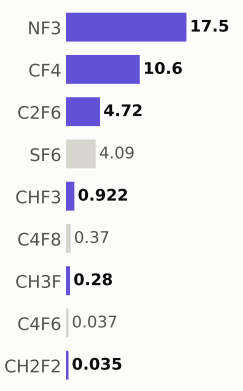

Step #15780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,685.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

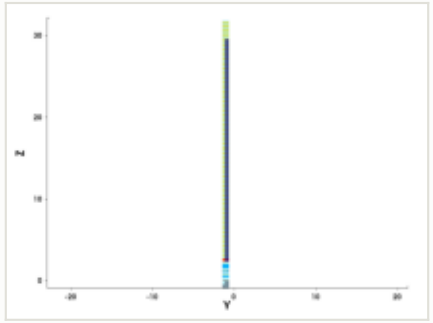

y cut at -1.035 µm

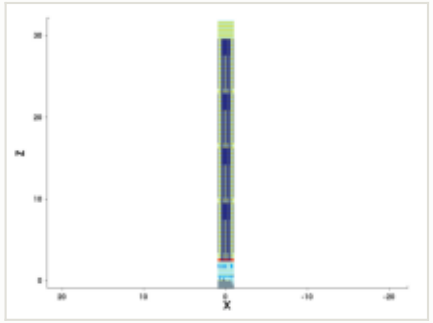

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

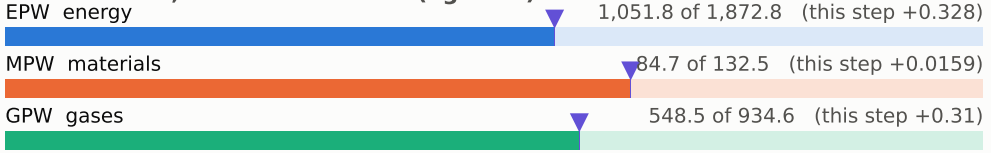

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

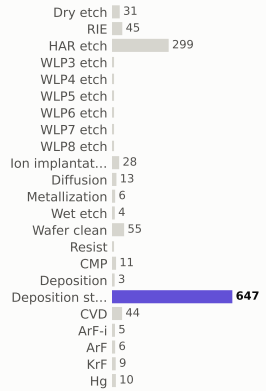

materials deposited (g)

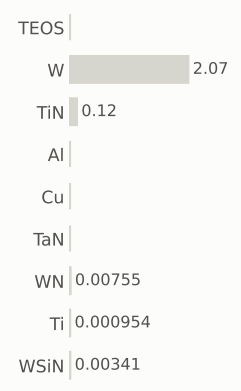

gases emitted (g)

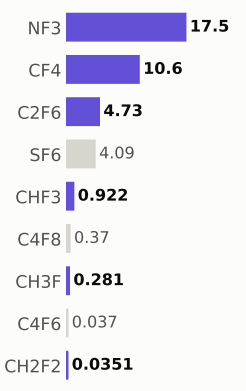

Step #15790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,685.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

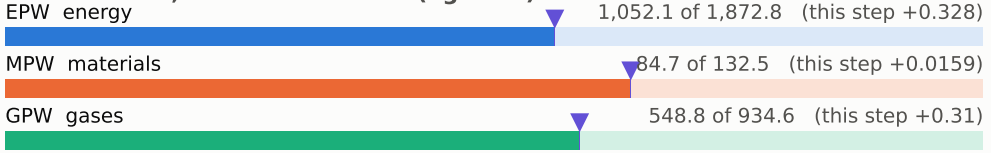

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

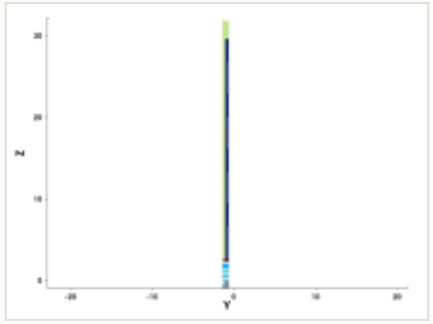

y cut at -1.035 µm

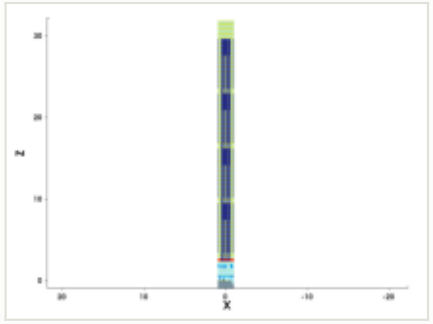

mask for this step

no mask for this step

steps by process area

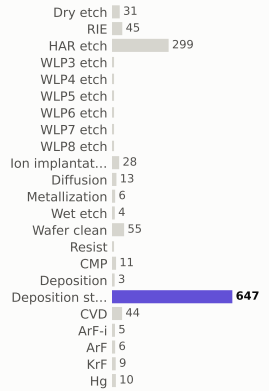

materials deposited (g)

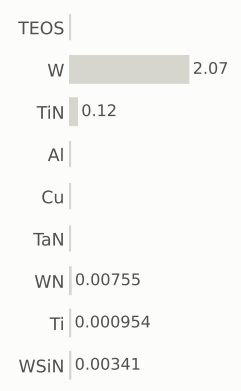

gases emitted (g)

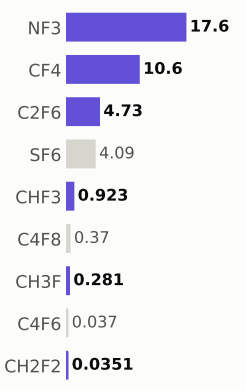

Step #15800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,686.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

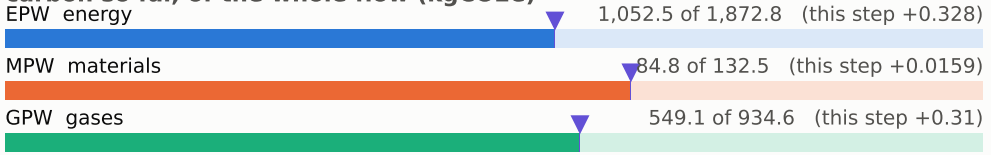

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

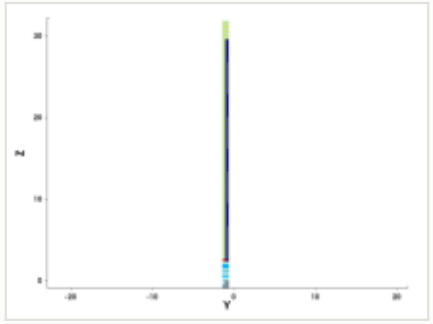

y cut at -1.035 µm

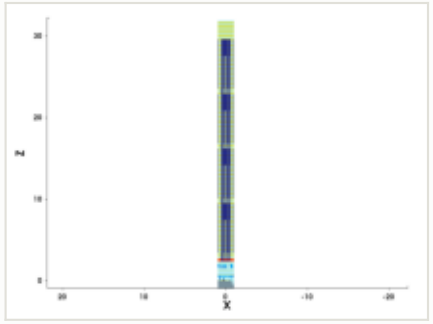

mask for this step

no mask for this step

steps by process area

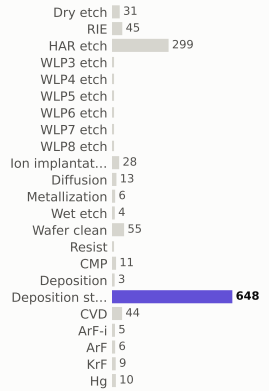

materials deposited (g)

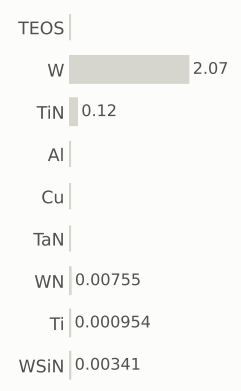

gases emitted (g)

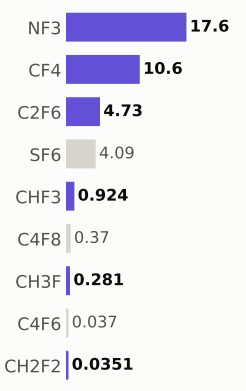

Step #15810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,687.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

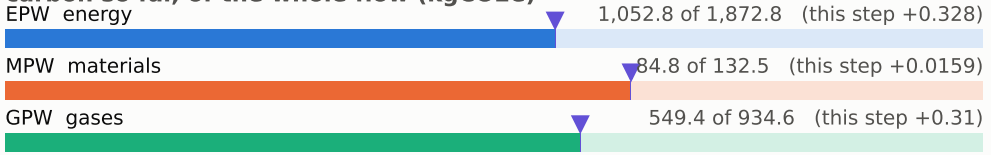

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

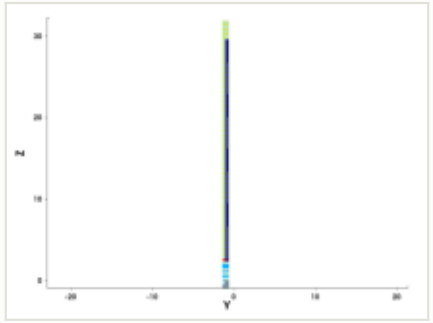

y cut at -1.035 µm

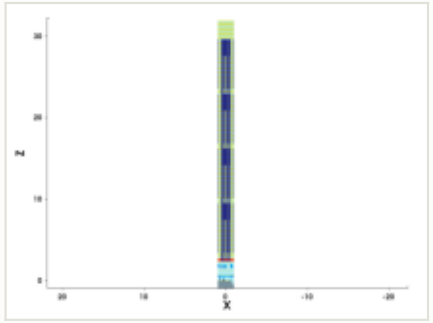

mask for this step

no mask for this step

steps by process area

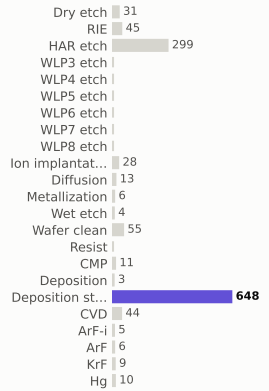

materials deposited (g)

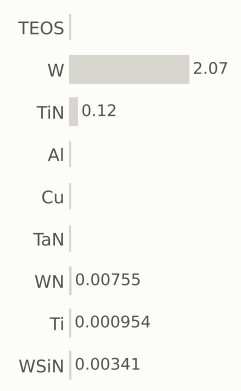

gases emitted (g)

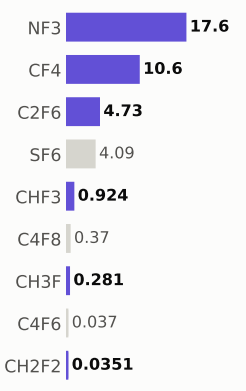

Step #15820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,687.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

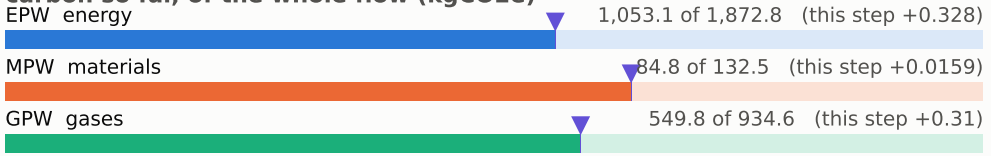

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

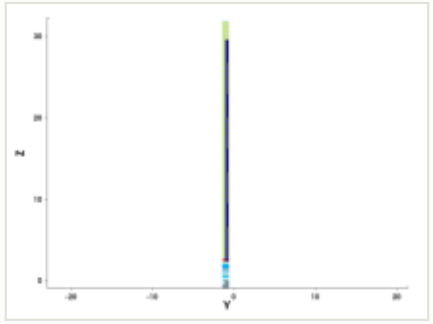

y cut at -1.035 µm

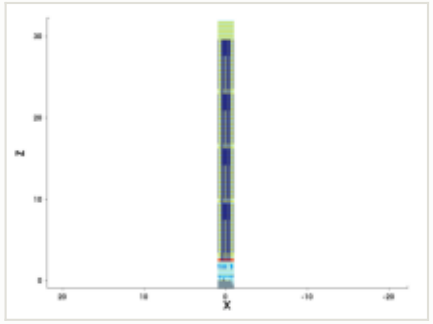

mask for this step

no mask for this step

steps by process area

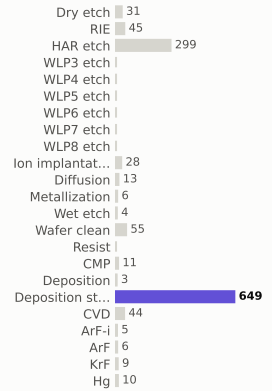

materials deposited (g)

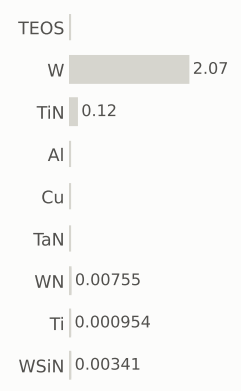

gases emitted (g)

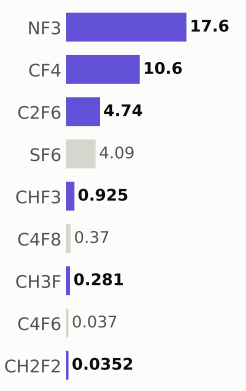

Step #15830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,688.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

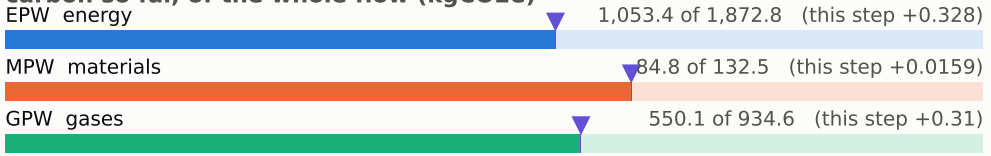

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

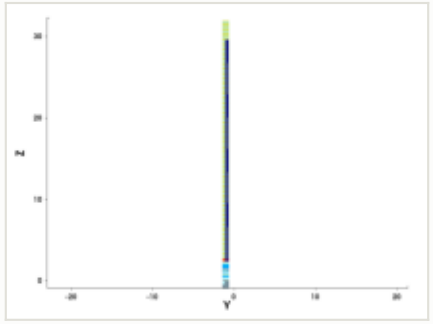

y cut at -1.035 µm

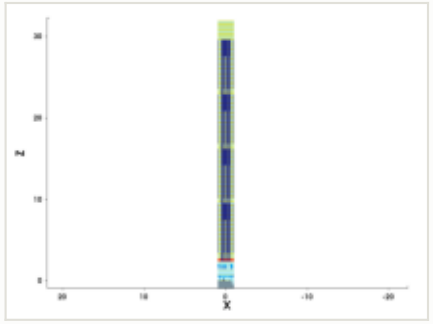

mask for this step

no mask for this step

steps by process area

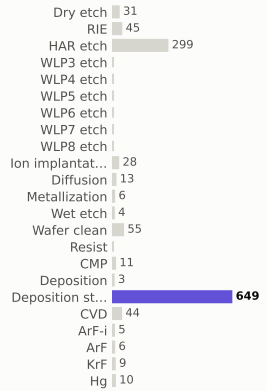

materials deposited (g)

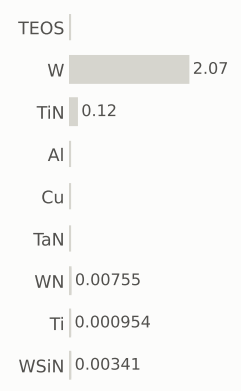

gases emitted (g)

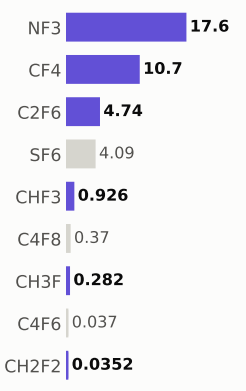

Step #15840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,689.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

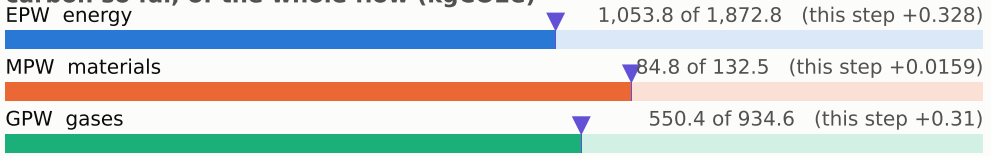

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

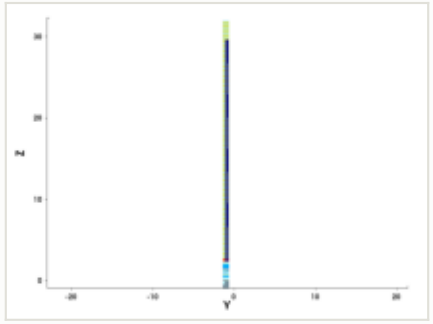

y cut at -1.035 µm

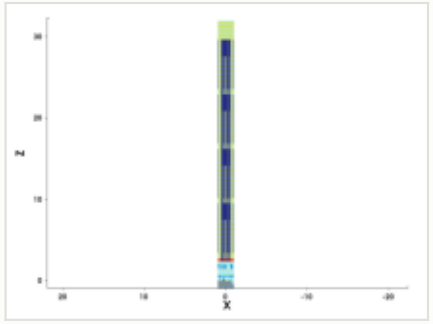

mask for this step

no mask for this step

steps by process area

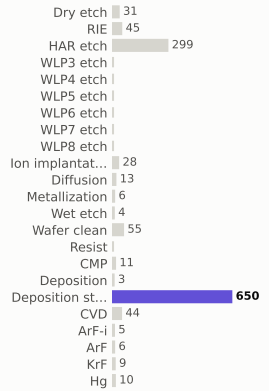

materials deposited (g)

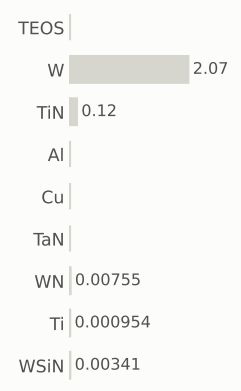

gases emitted (g)

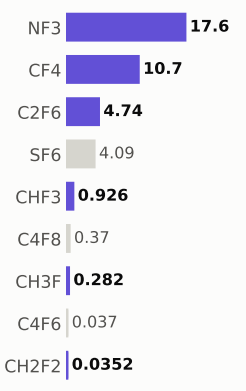

Step #15850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,689.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

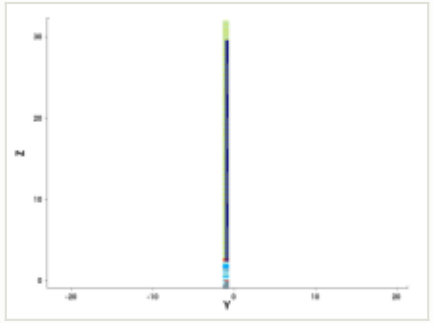

y cut at -1.035 µm

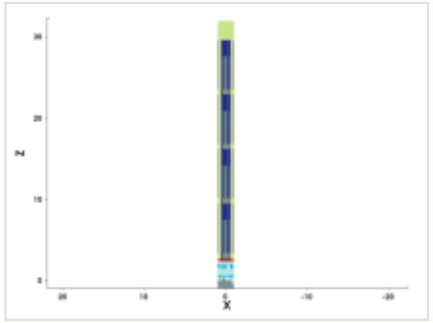

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

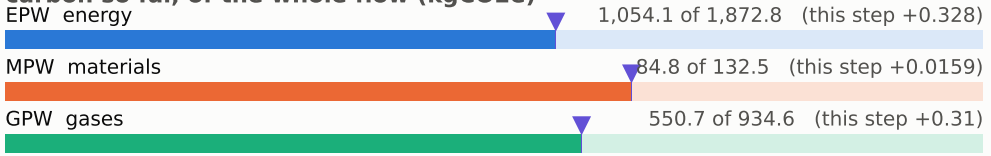

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

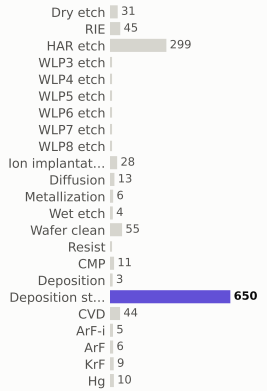

materials deposited (g)

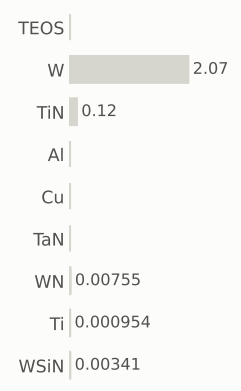

gases emitted (g)

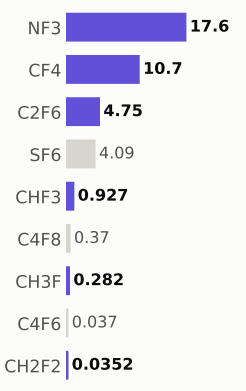

Step #15860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,690.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

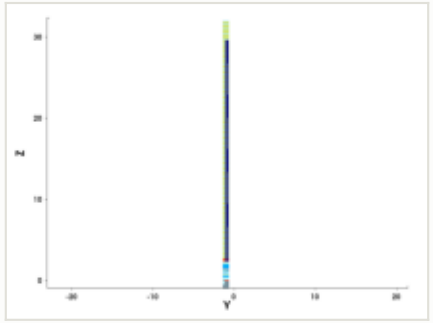

y cut at -1.035 µm

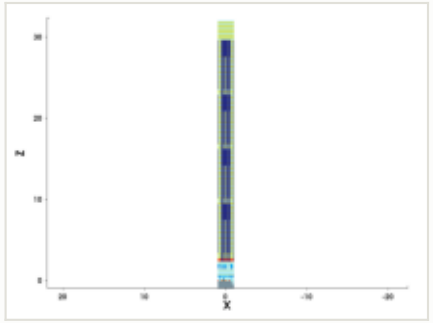

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

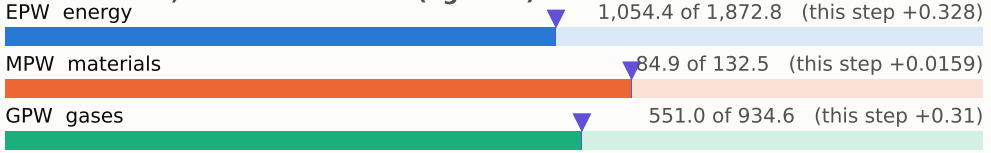

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

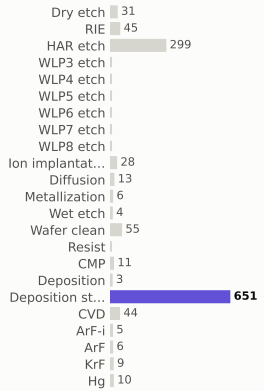

materials deposited (g)

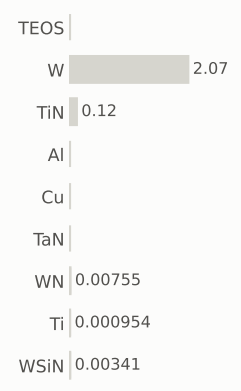

gases emitted (g)

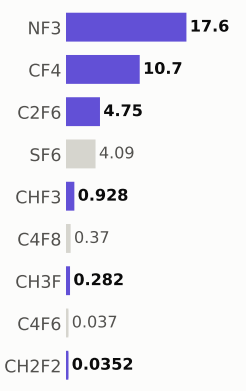

Step #15870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,690.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

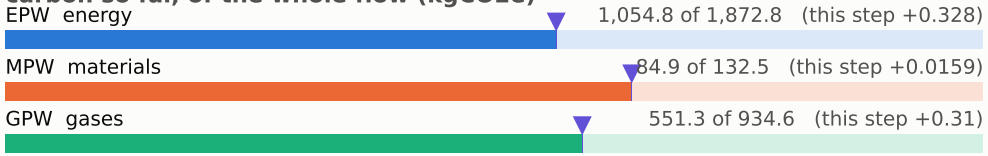

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

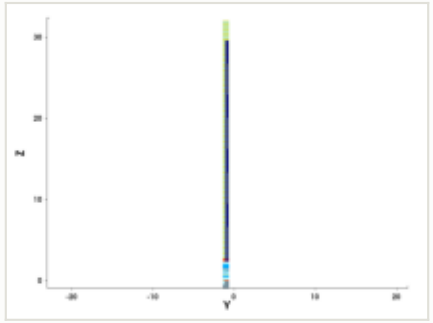

y cut at -1.035 µm

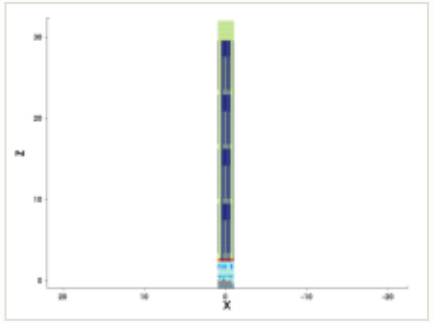

mask for this step

no mask for this step

steps by process area

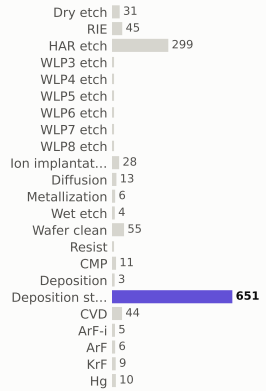

materials deposited (g)

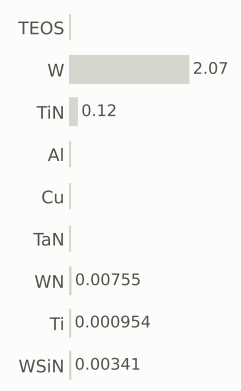

gases emitted (g)

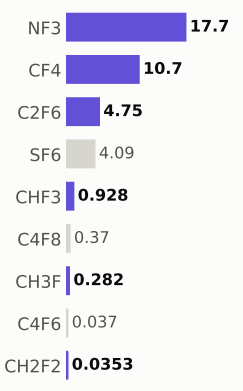

Step #15880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,691.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

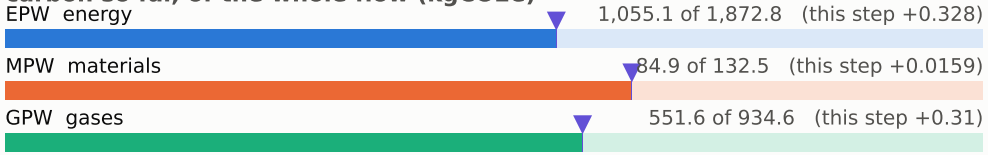

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

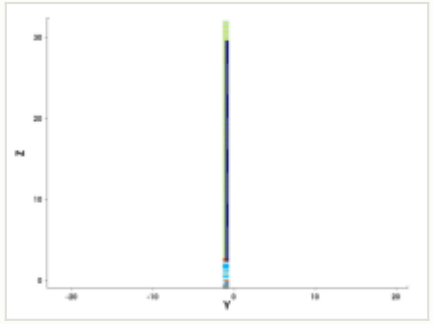

y cut at -1.035 µm

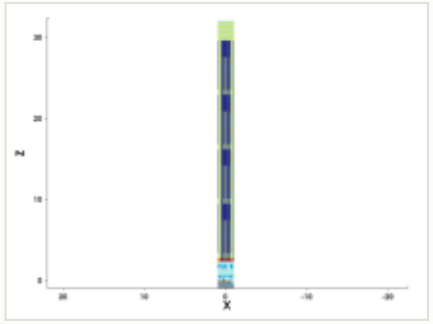

mask for this step

no mask for this step

steps by process area

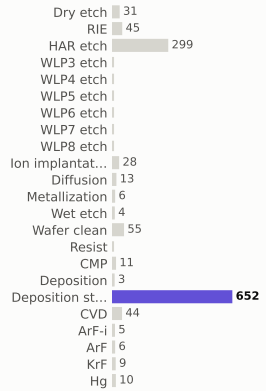

materials deposited (g)

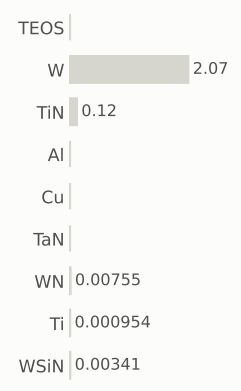

gases emitted (g)

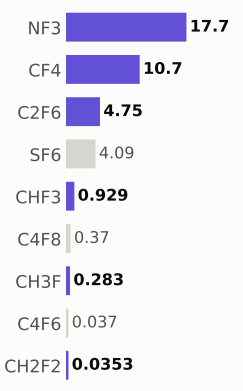

Step #15890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,692.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

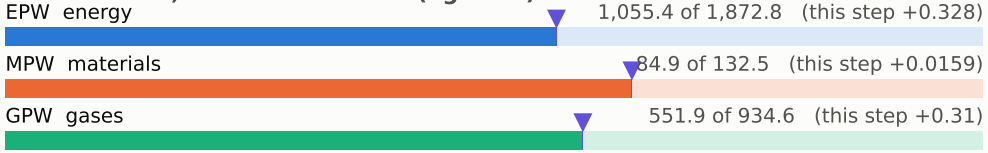

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

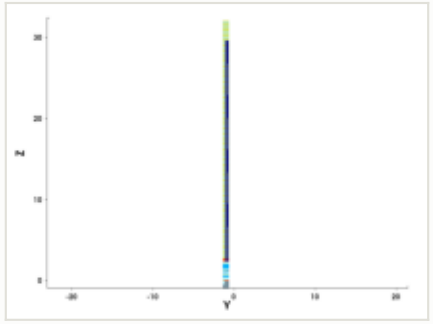

y cut at -1.035 µm

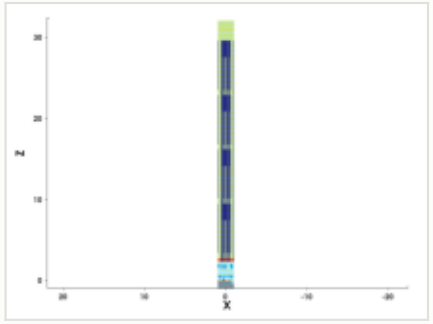

mask for this step

no mask for this step

steps by process area

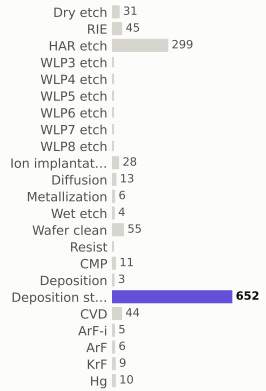

materials deposited (g)

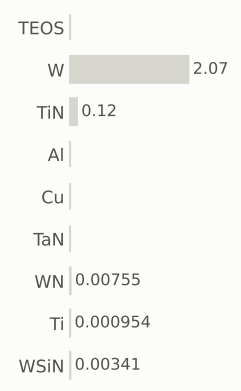

gases emitted (g)

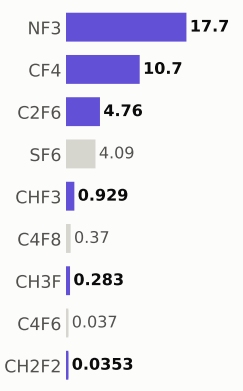

Step #15900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,692.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

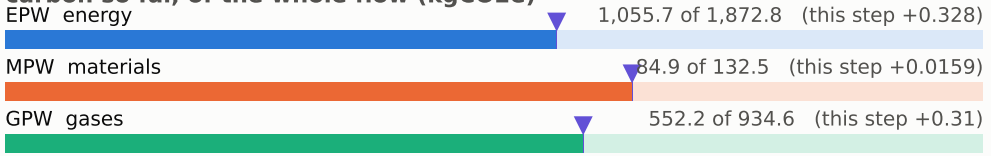

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

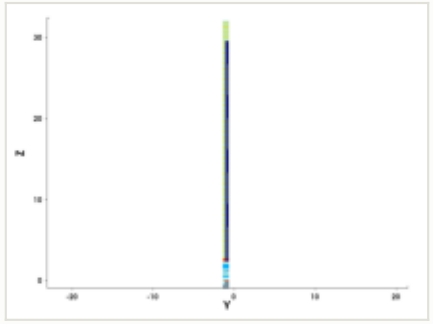

y cut at -1.035 µm

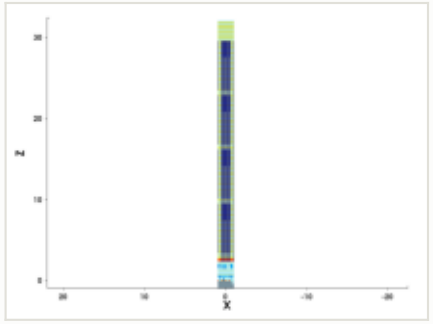

mask for this step

no mask for this step

steps by process area

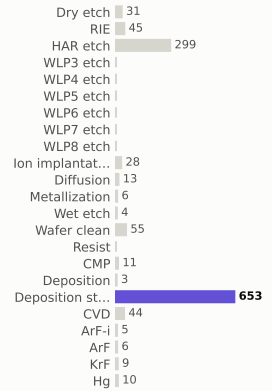

materials deposited (g)

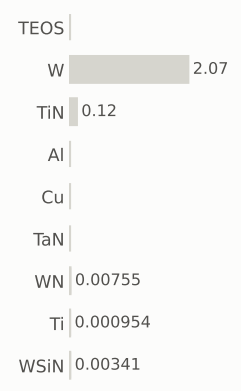

gases emitted (g)

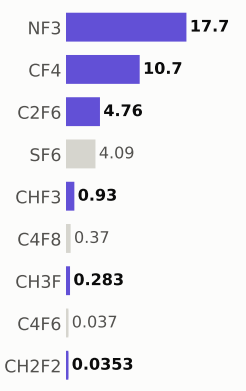

Step #15910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,693.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

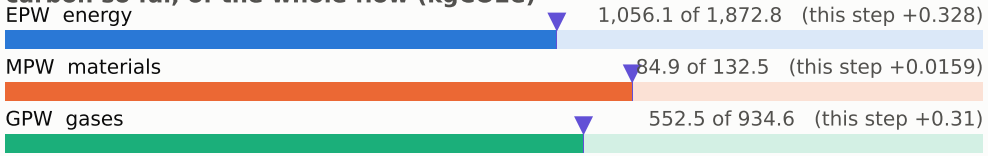

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

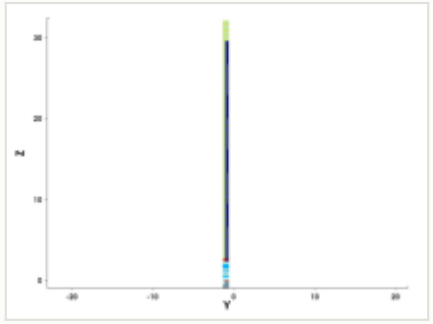

y cut at -1.035 µm

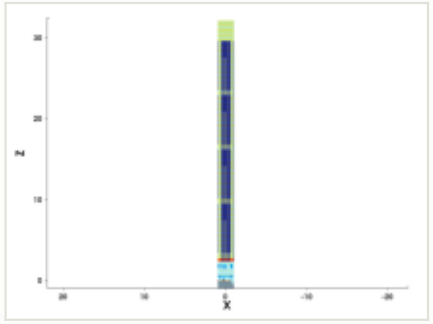

mask for this step

no mask for this step

steps by process area

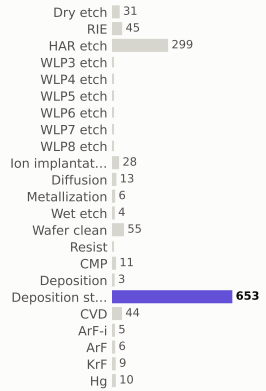

materials deposited (g)

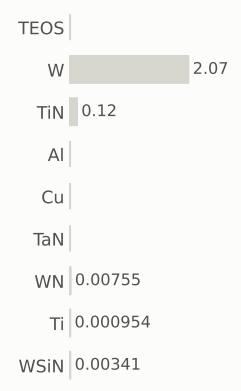

gases emitted (g)

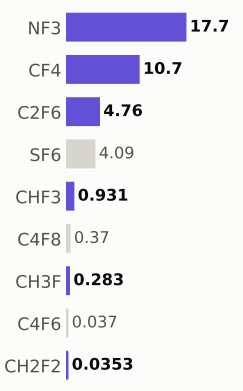

Step #15920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,694.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

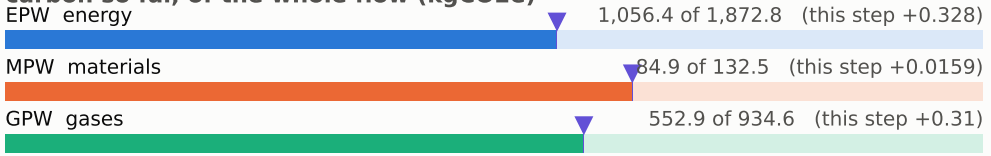

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

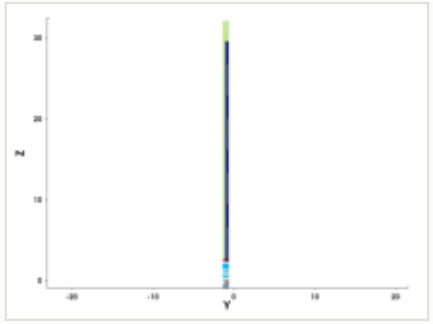

y cut at -1.035 µm

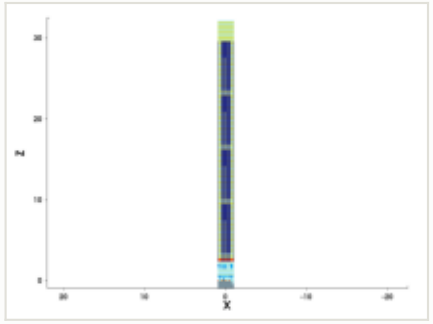

mask for this step

no mask for this step

steps by process area

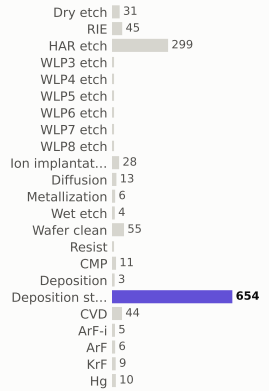

materials deposited (g)

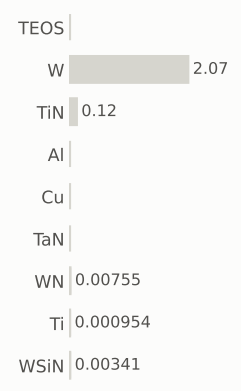

gases emitted (g)

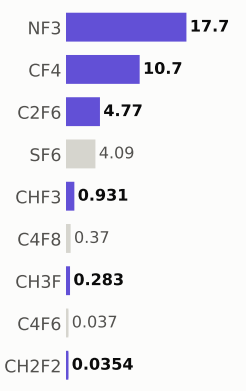

Step #15930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,694.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

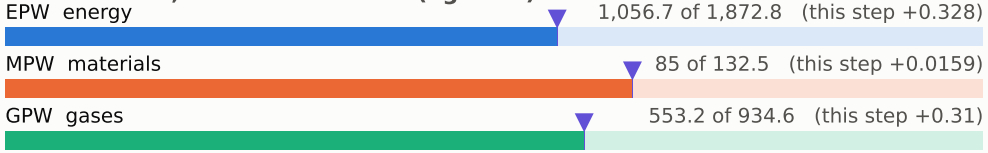

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

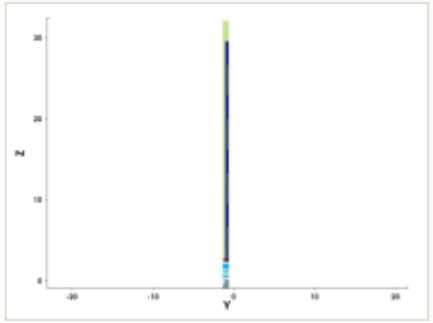

y cut at -1.035 µm

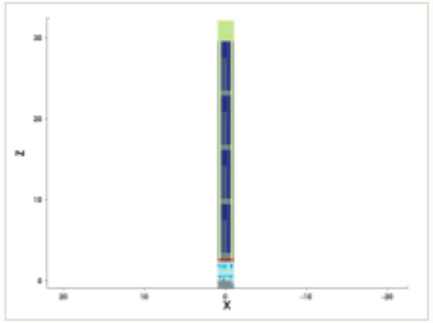

mask for this step

no mask for this step

steps by process area

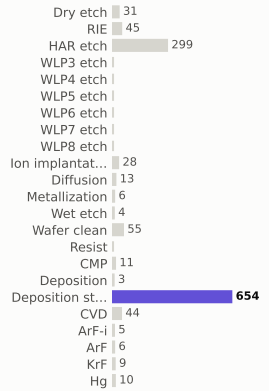

materials deposited (g)

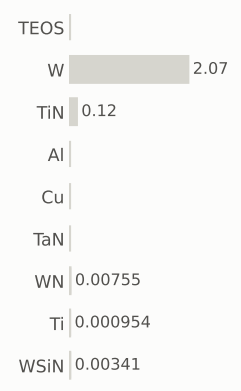

gases emitted (g)

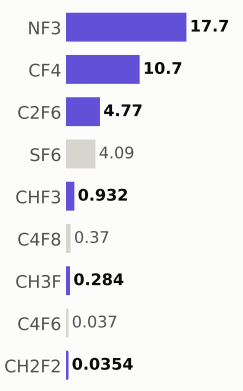

Step #15940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,695.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

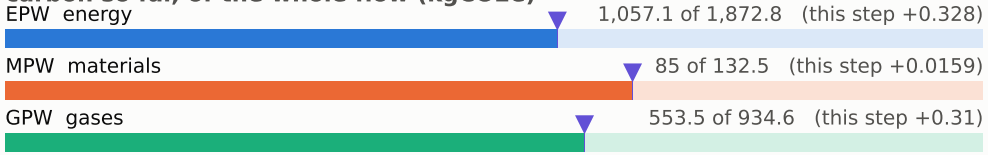

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

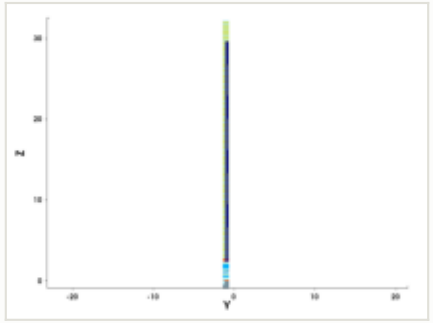

y cut at -1.035 µm

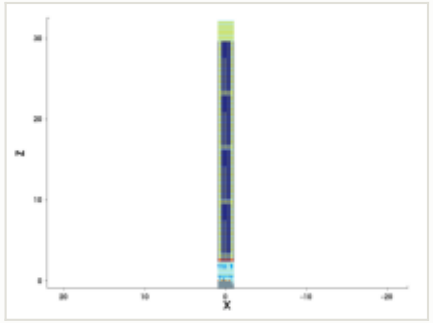

mask for this step

no mask for this step

steps by process area

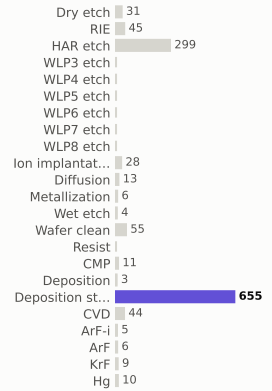

materials deposited (g)

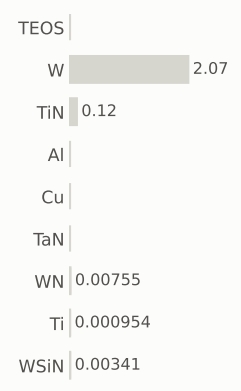

gases emitted (g)

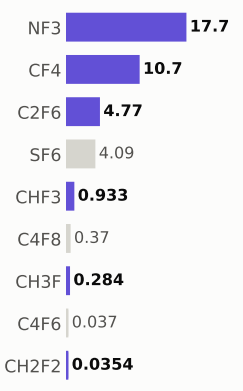

Step #15950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,696.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

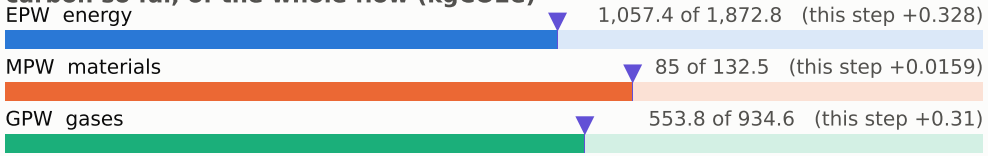

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

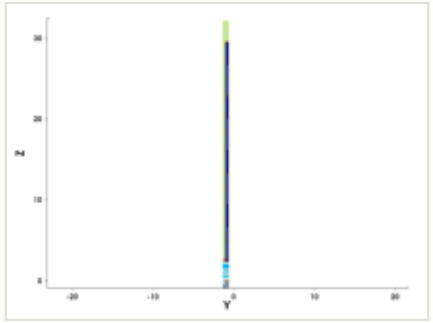

y cut at -1.035 µm

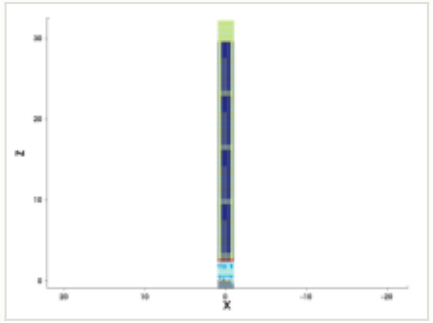

mask for this step

no mask for this step

steps by process area

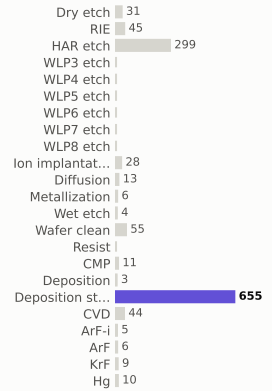

materials deposited (g)

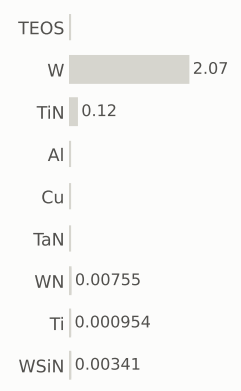

gases emitted (g)

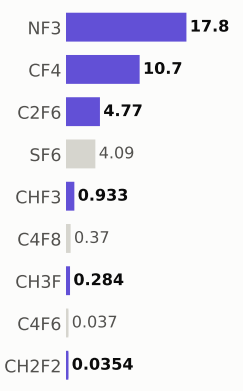

Step #15960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,696.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

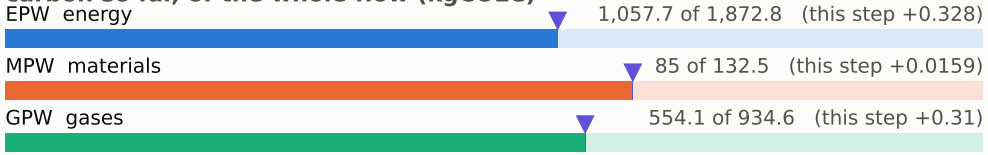

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

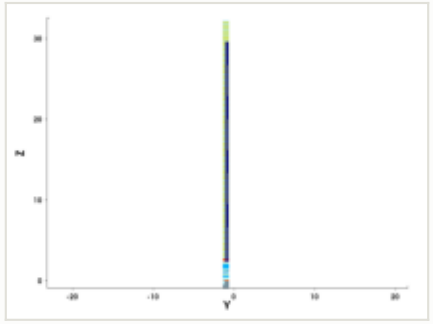

y cut at -1.035 µm

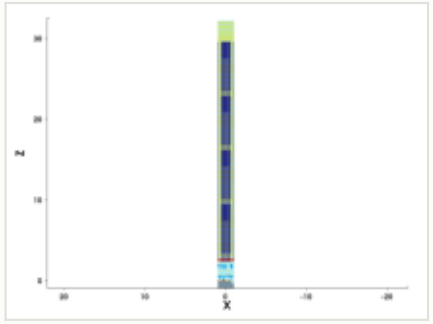

mask for this step

no mask for this step

steps by process area

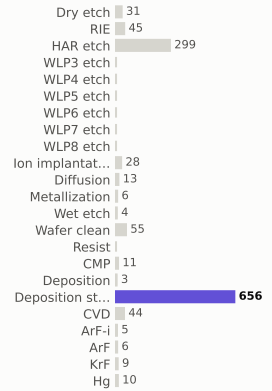

materials deposited (g)

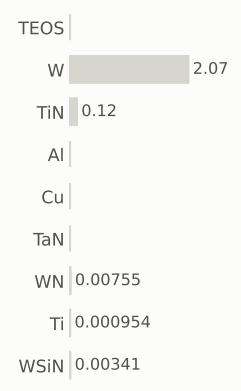

gases emitted (g)

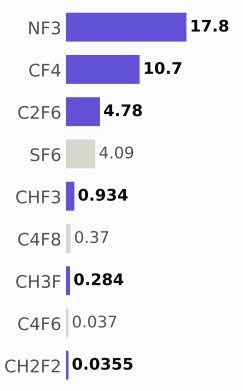

Step #15970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,697.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

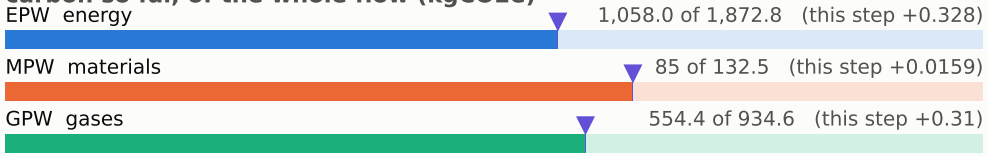

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

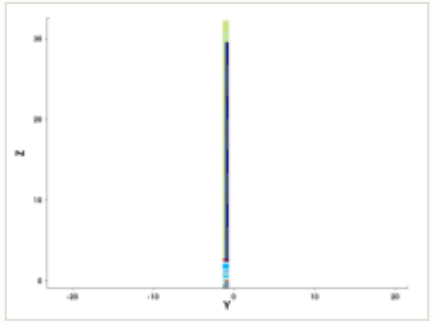

y cut at -1.035 µm

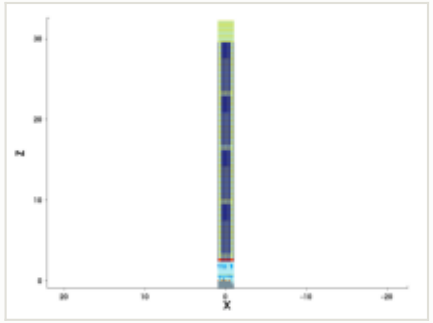

mask for this step

no mask for this step

steps by process area

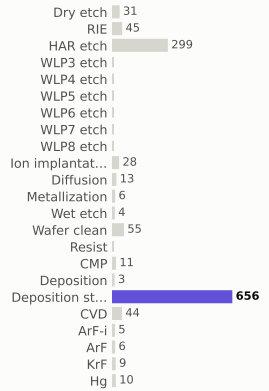

materials deposited (g)

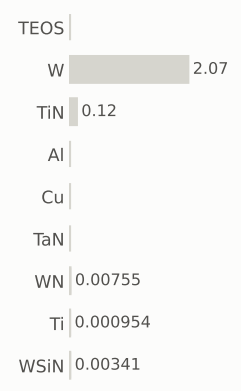

gases emitted (g)

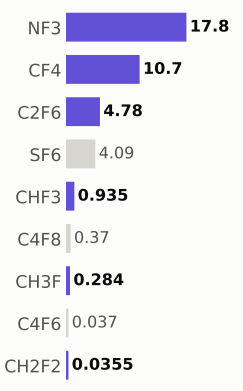

Step #15980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,698.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

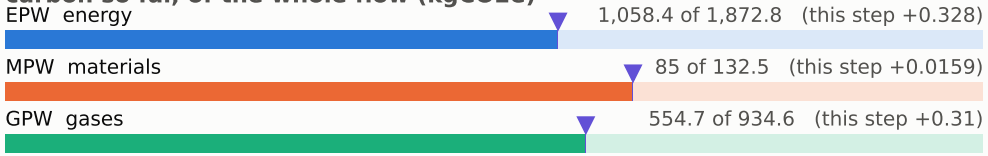

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

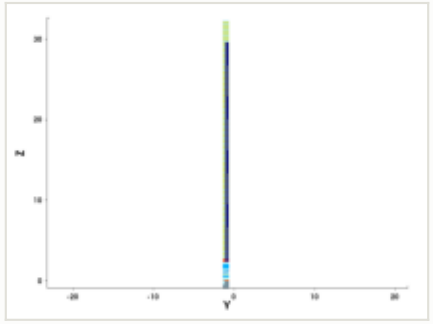

y cut at -1.035 µm

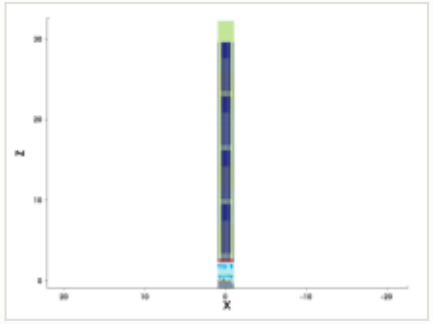

mask for this step

no mask for this step

steps by process area

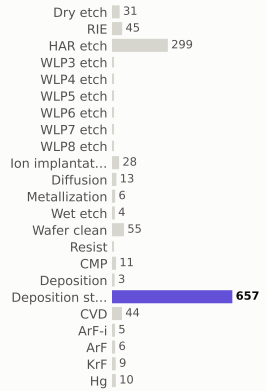

materials deposited (g)

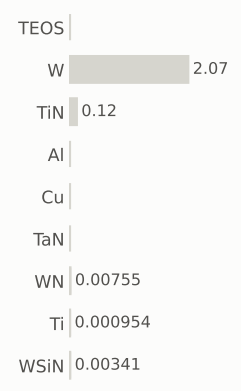

gases emitted (g)

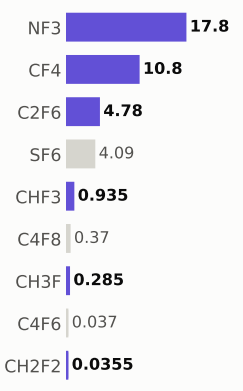

Step #15990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,698.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

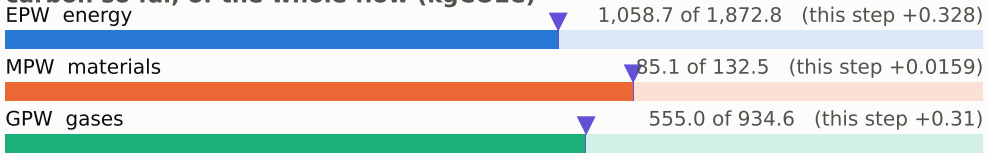

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

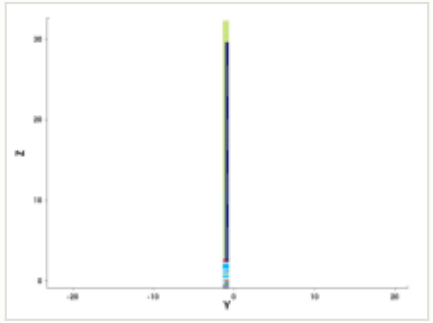

y cut at -1.035 µm

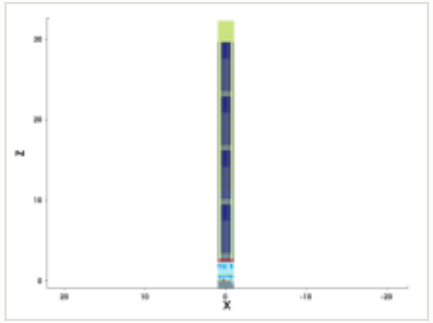

mask for this step

no mask for this step

steps by process area

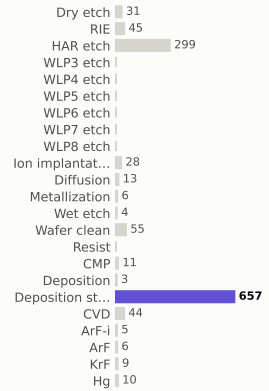

materials deposited (g)

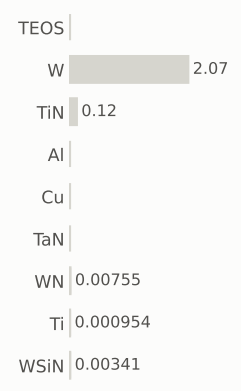

gases emitted (g)

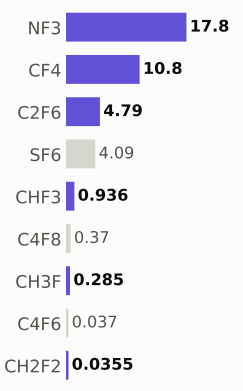

Step #16000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,699.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

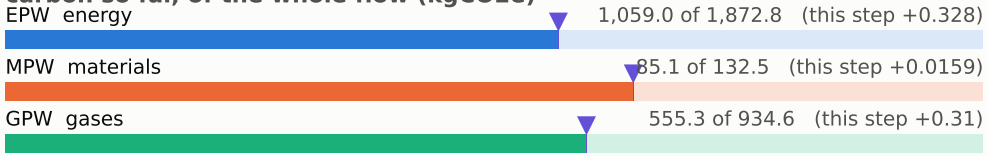

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

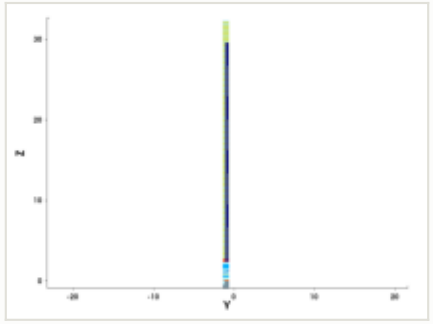

y cut at -1.035 µm

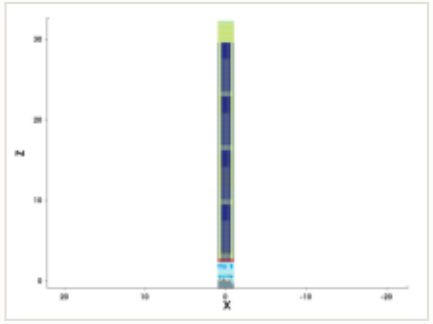

mask for this step

no mask for this step

steps by process area

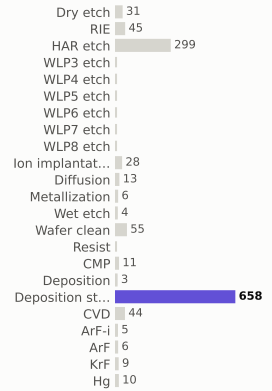

materials deposited (g)

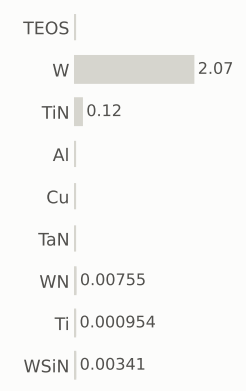

gases emitted (g)

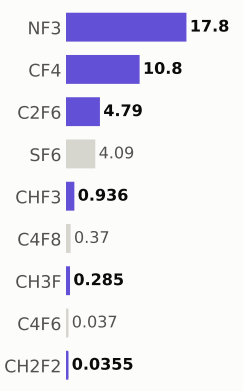

Step #16010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,700.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

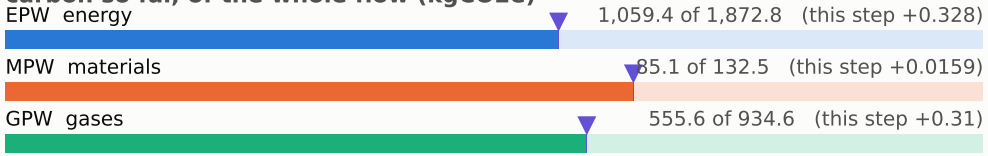

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

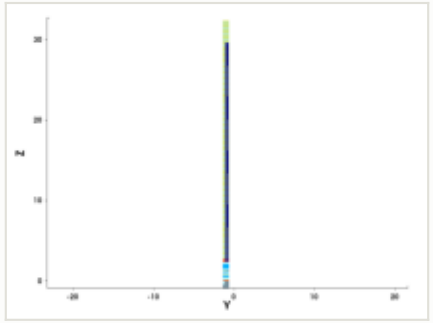

y cut at -1.035 µm

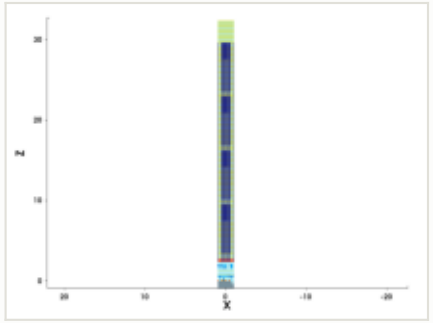

mask for this step

no mask for this step

steps by process area

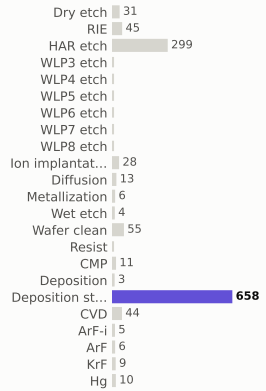

materials deposited (g)

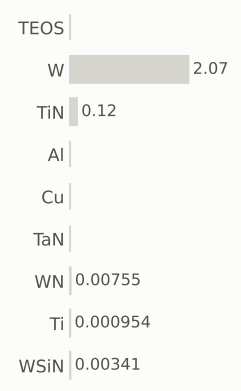

gases emitted (g)

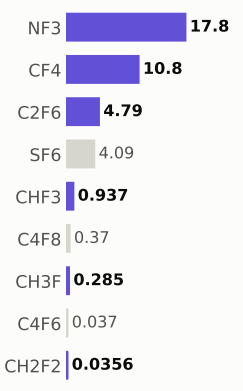

Step #16020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,700.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

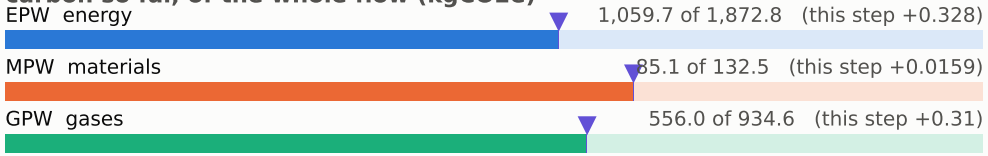

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

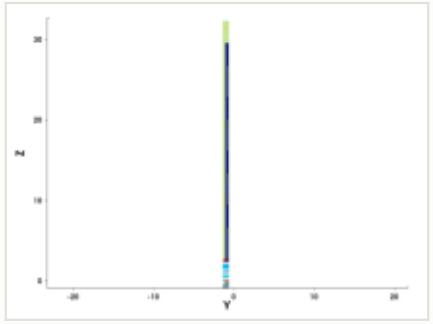

y cut at -1.035 µm

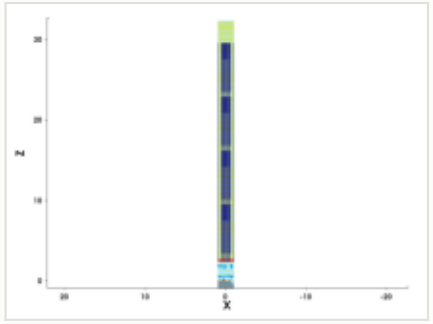

mask for this step

no mask for this step

steps by process area

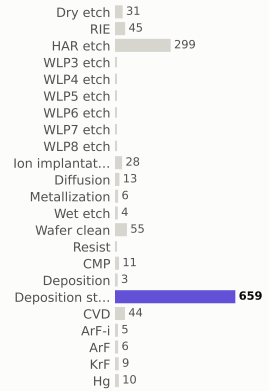

materials deposited (g)

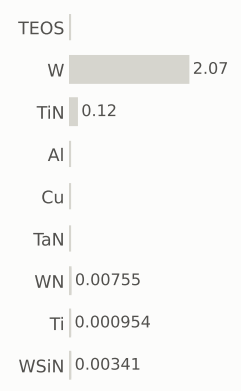

gases emitted (g)

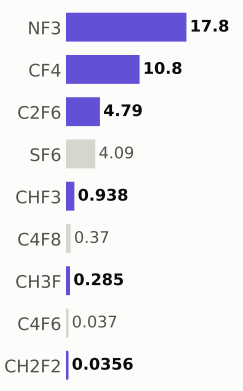

Step #16030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,701.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

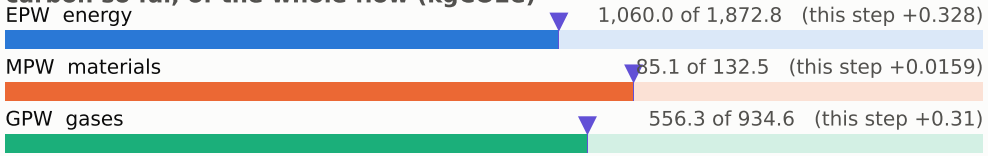

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

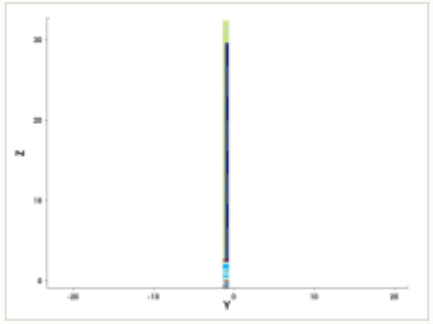

y cut at -1.035 µm

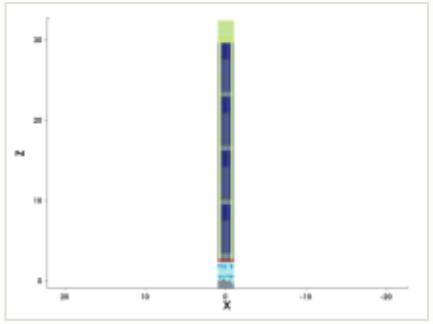

mask for this step

no mask for this step

steps by process area

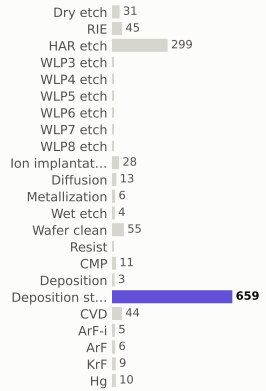

materials deposited (g)

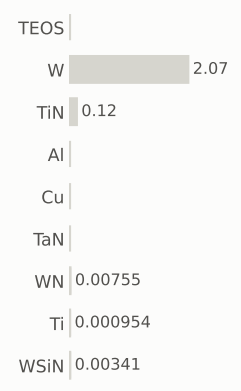

gases emitted (g)

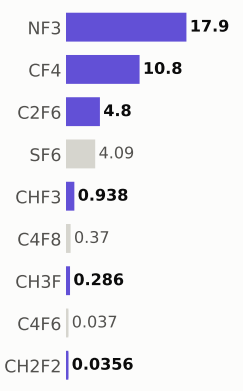

Step #16040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,702.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

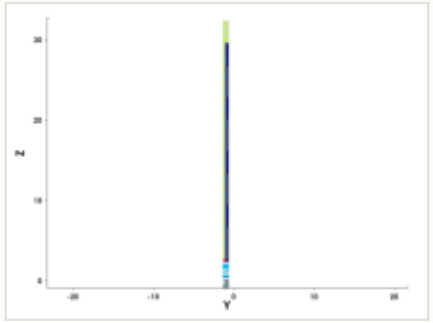

y cut at -1.035 µm

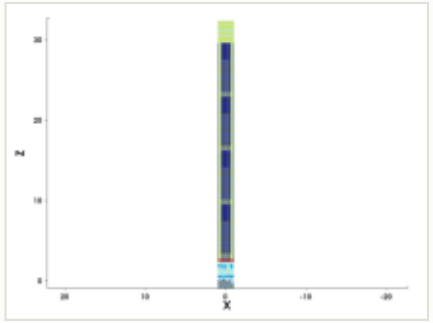

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

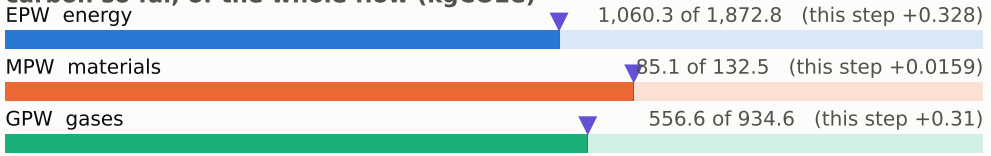

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

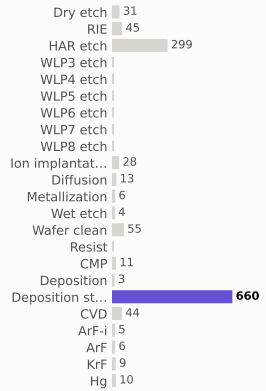

materials deposited (g)

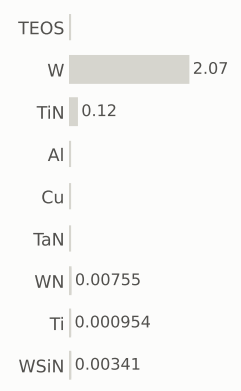

gases emitted (g)

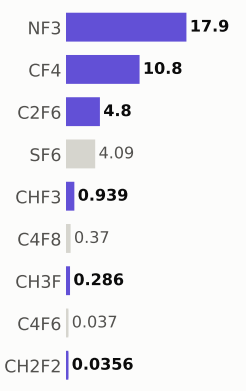

Step #16050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,702.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

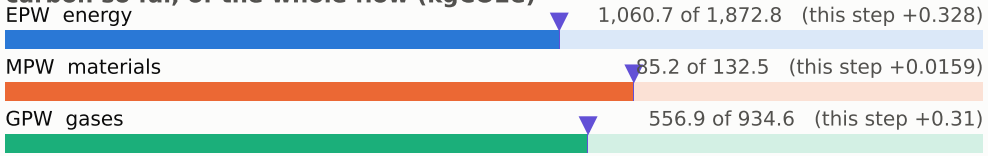

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

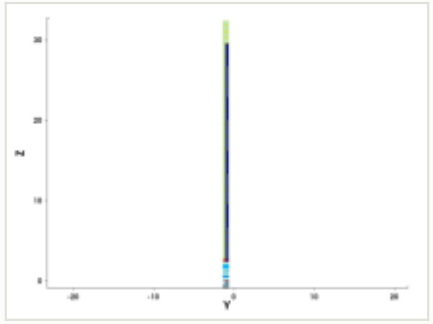

y cut at -1.035 µm

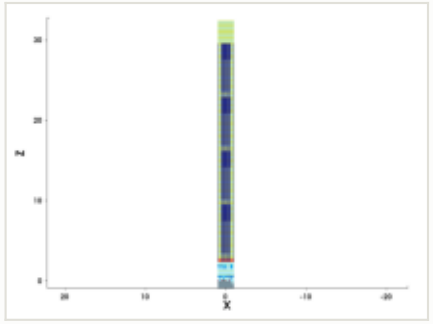

mask for this step

no mask for this step

steps by process area

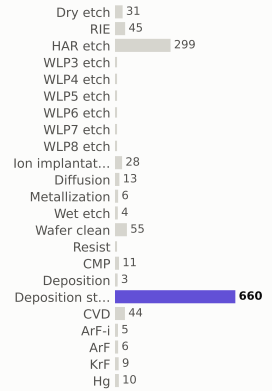

materials deposited (g)

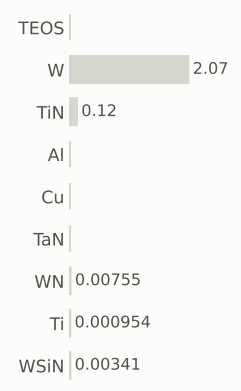

gases emitted (g)

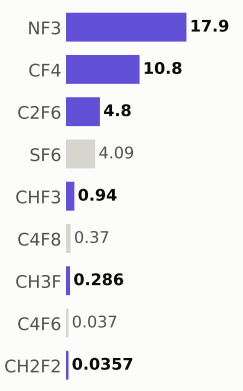

Step #16060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,703.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

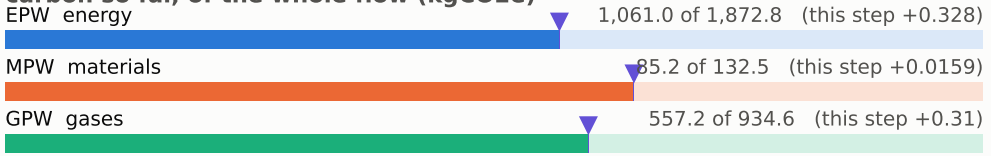

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

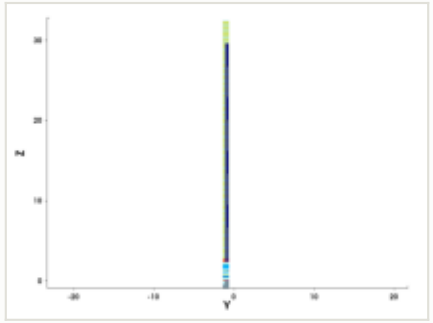

y cut at -1.035 µm

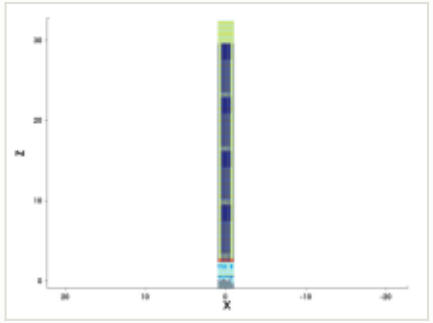

mask for this step

no mask for this step

steps by process area

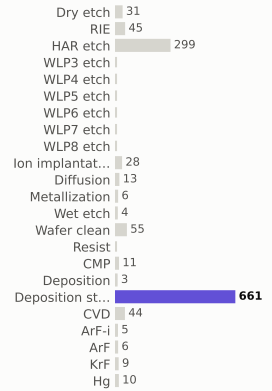

materials deposited (g)

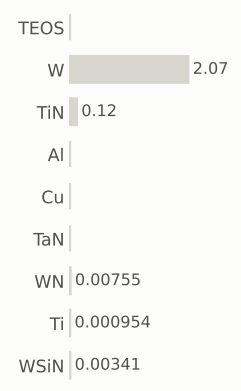

gases emitted (g)

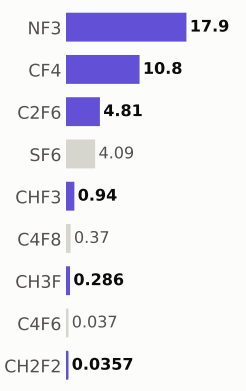

Step #16070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,704.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

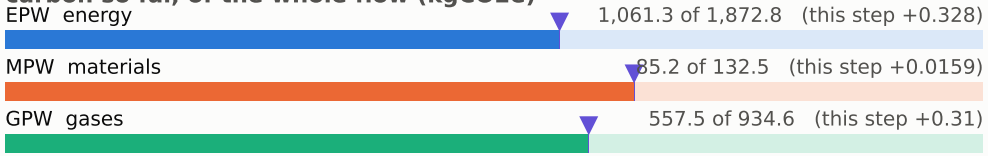

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

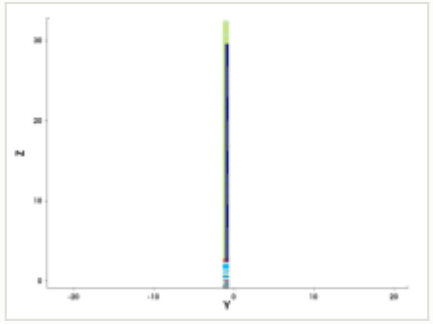

y cut at -1.035 µm

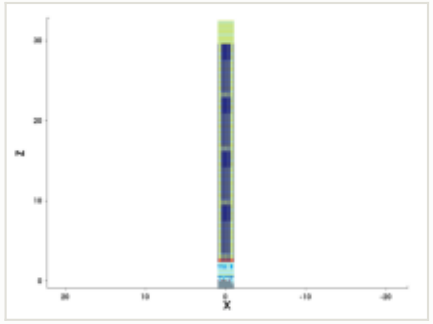

mask for this step

no mask for this step

steps by process area

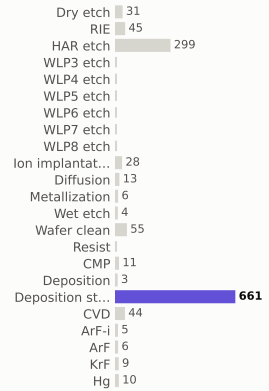

materials deposited (g)

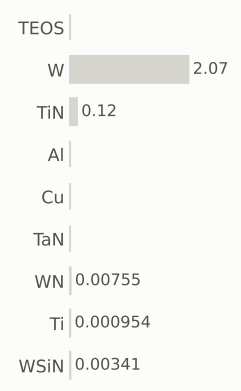

gases emitted (g)

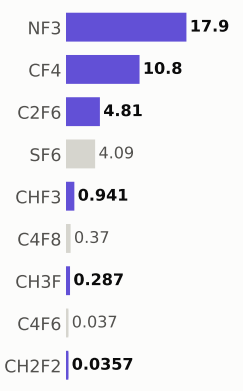

Step #16080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,704.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

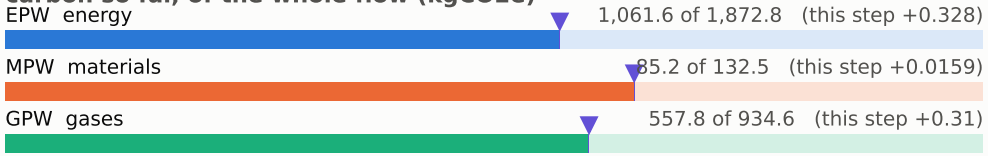

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

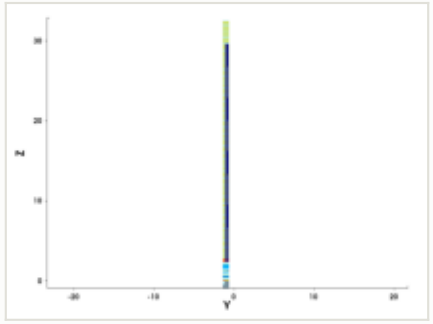

y cut at -1.035 µm

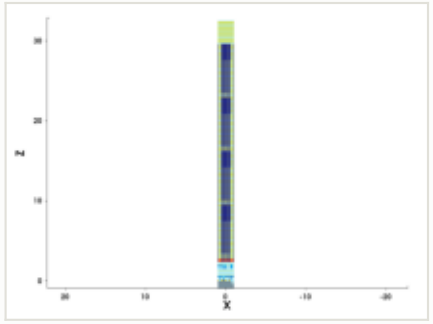

mask for this step

no mask for this step

steps by process area

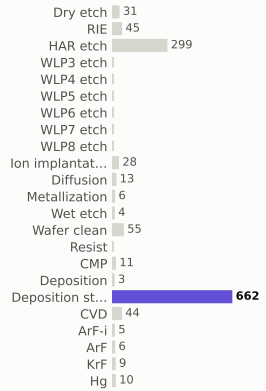

materials deposited (g)

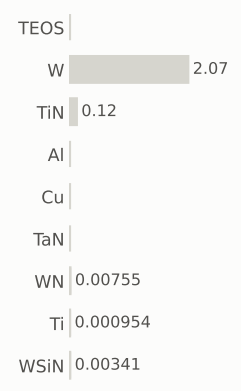

gases emitted (g)

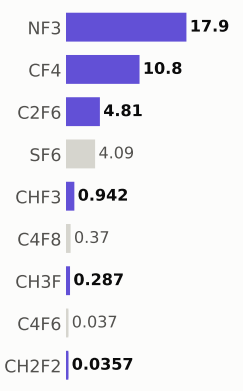

Step #16090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,705.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

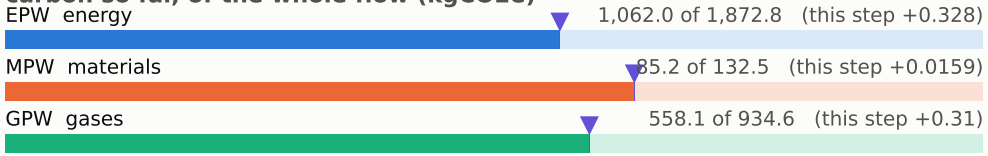

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

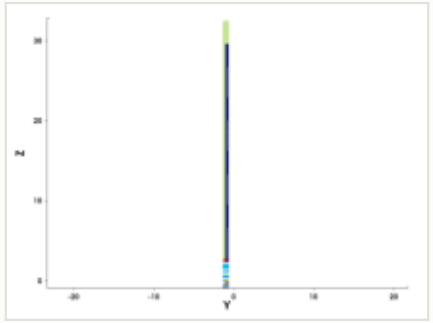

y cut at -1.035 µm

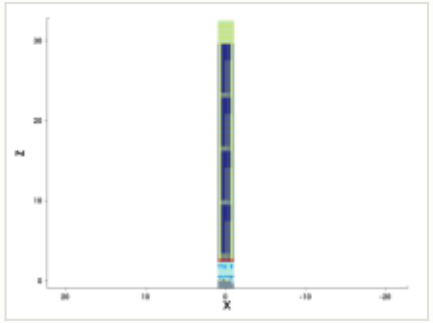

mask for this step

no mask for this step

steps by process area

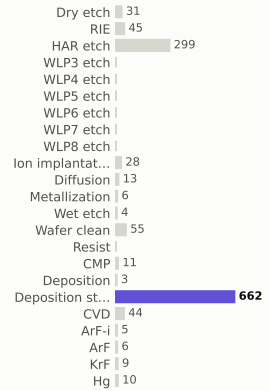

materials deposited (g)

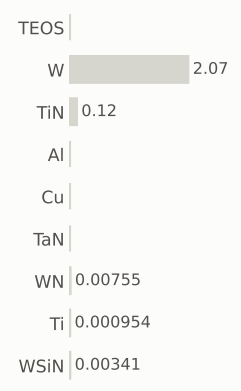

gases emitted (g)

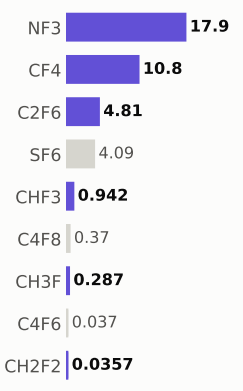

Step #16100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,706.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

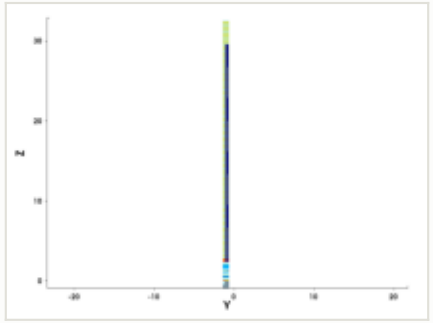

y cut at -1.035 µm

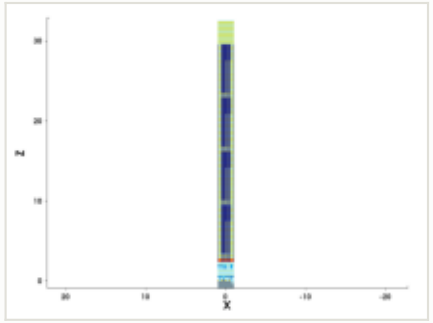

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

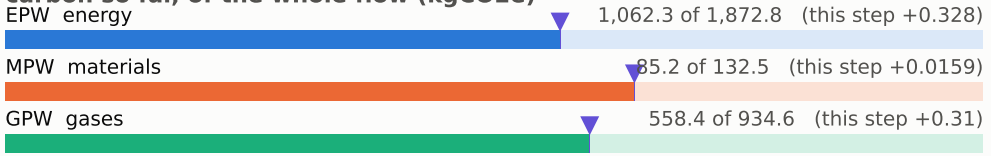

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

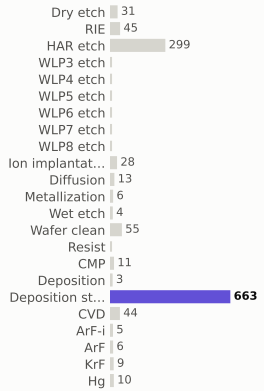

materials deposited (g)

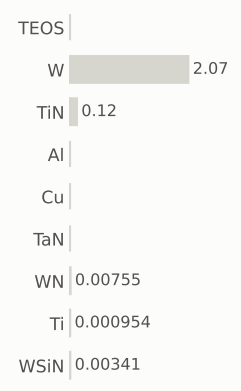

gases emitted (g)

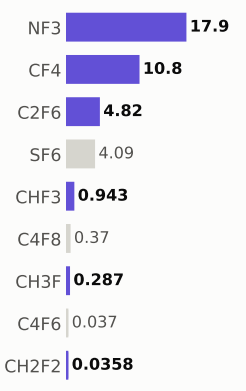

Step #16110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,706.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

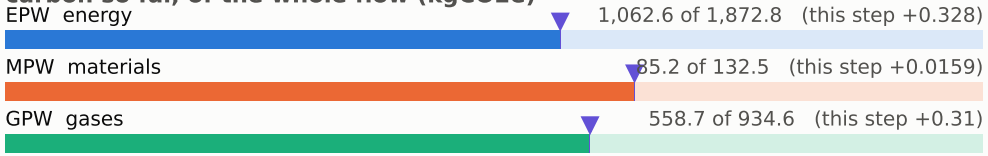

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

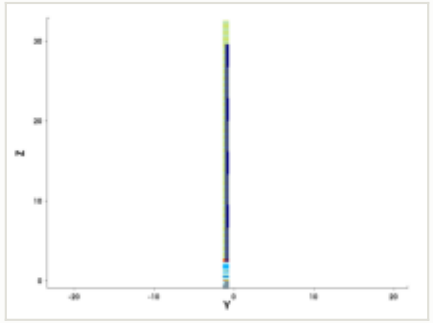

y cut at -1.035 µm

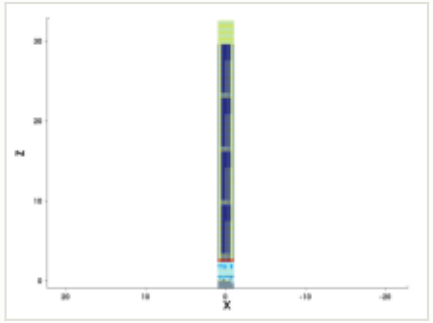

mask for this step

no mask for this step

steps by process area

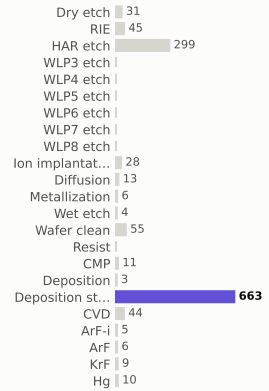

materials deposited (g)

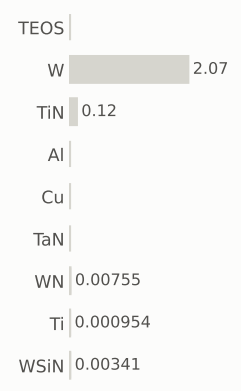

gases emitted (g)

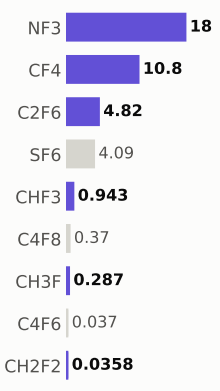

Step #16120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,707.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

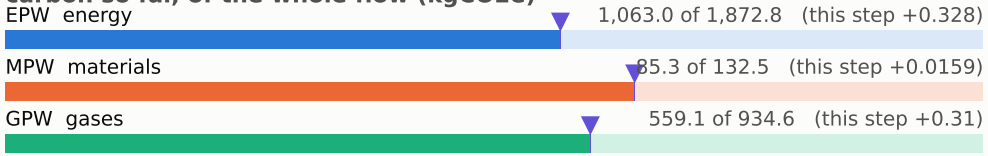

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

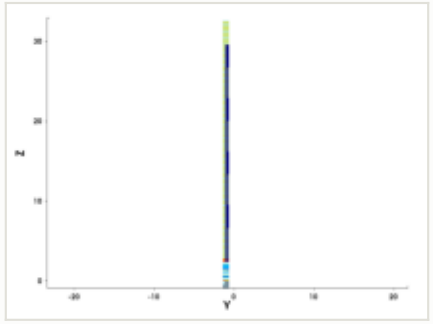

y cut at -1.035 µm

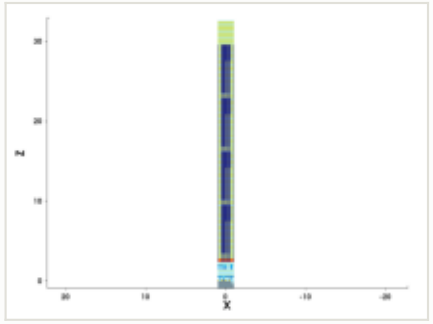

mask for this step

no mask for this step

steps by process area

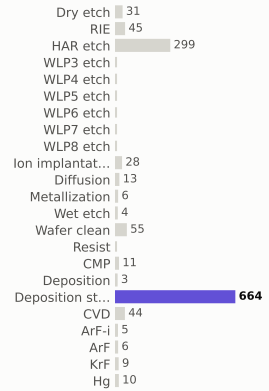

materials deposited (g)

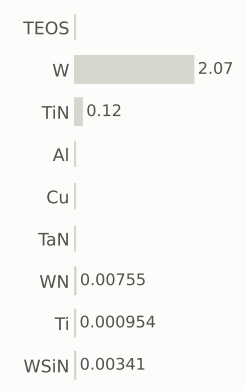

gases emitted (g)

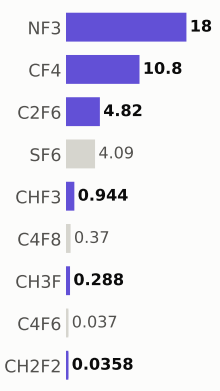

Step #16130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,707.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

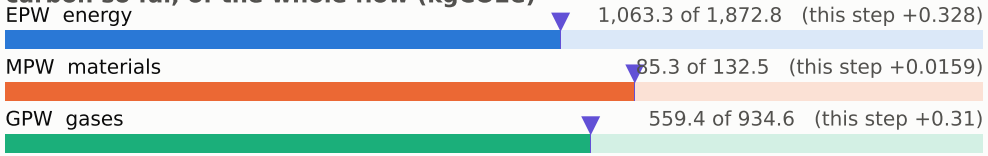

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

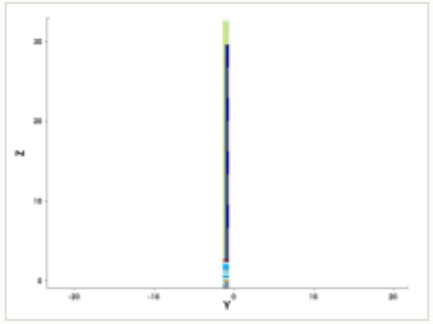

y cut at -1.035 µm

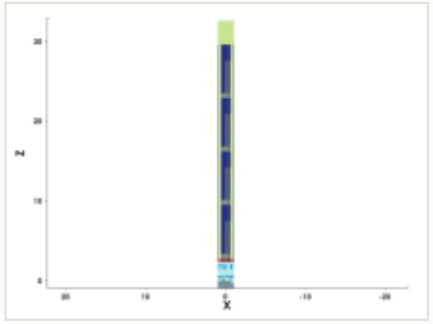

mask for this step

no mask for this step

steps by process area

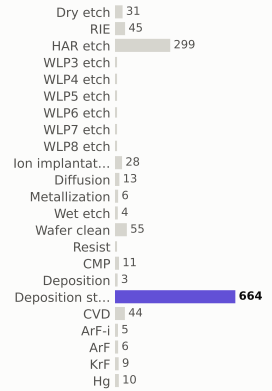

materials deposited (g)

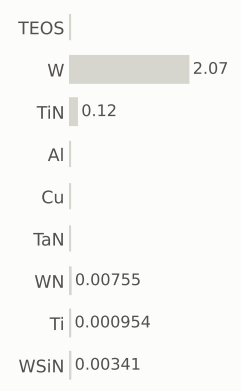

gases emitted (g)

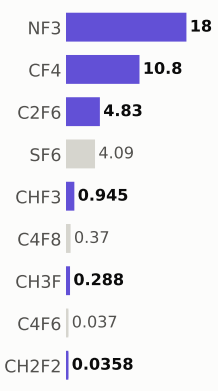

Step #16140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,708.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

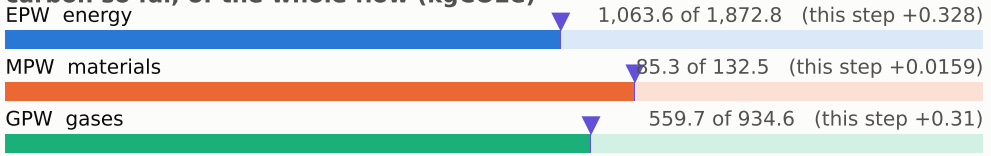

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

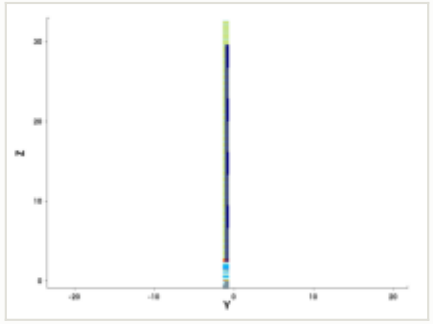

y cut at -1.035 µm

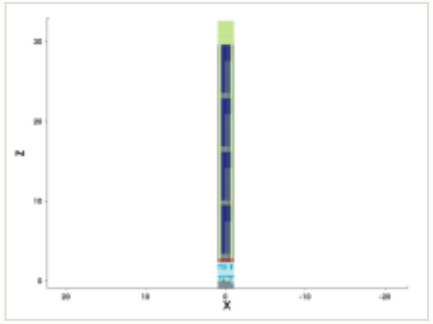

mask for this step

no mask for this step

steps by process area

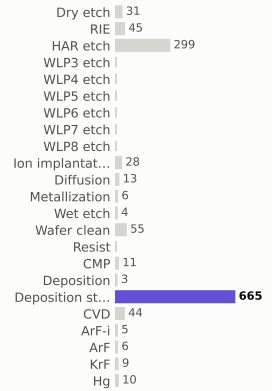

materials deposited (g)

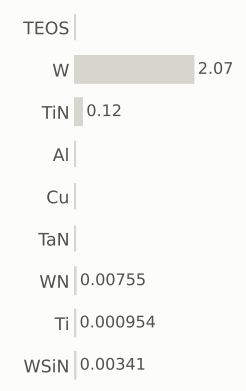

gases emitted (g)

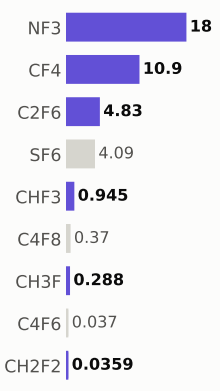

Step #16150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,709.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

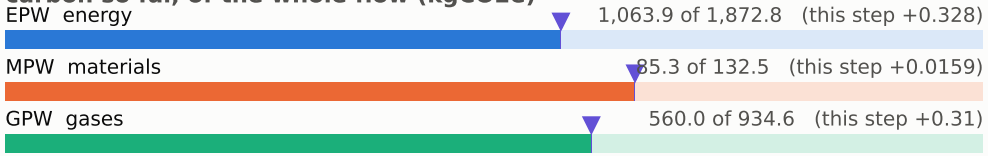

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

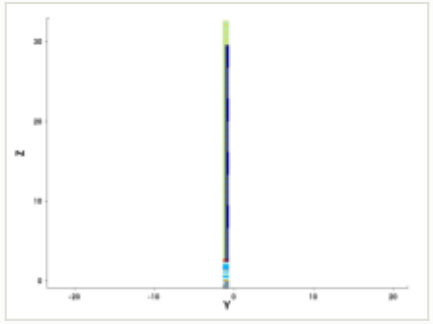

y cut at -1.035 µm

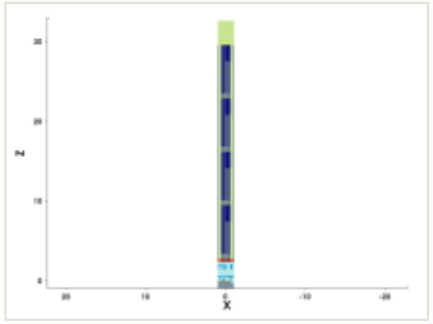

mask for this step

no mask for this step

steps by process area

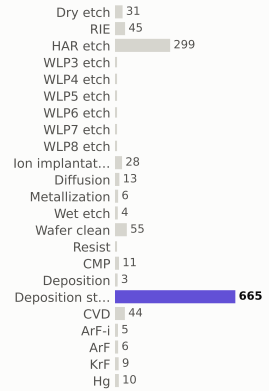

materials deposited (g)

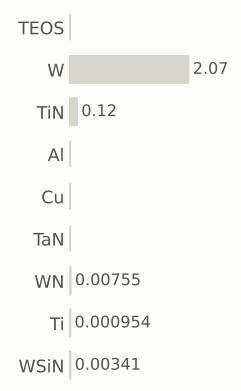

gases emitted (g)

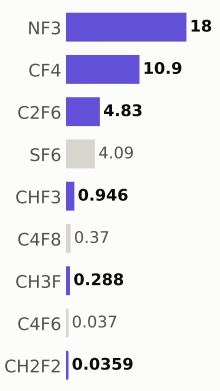

Step #16160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,709.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

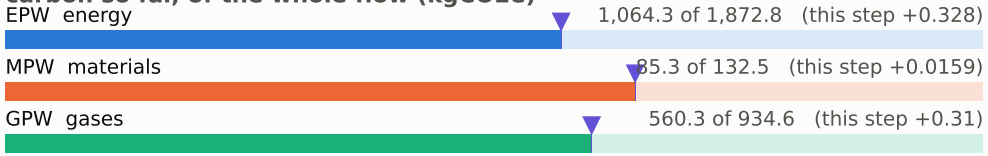

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

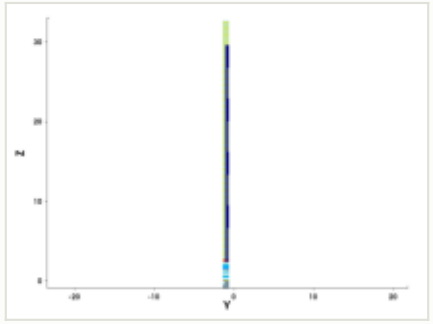

y cut at -1.035 µm

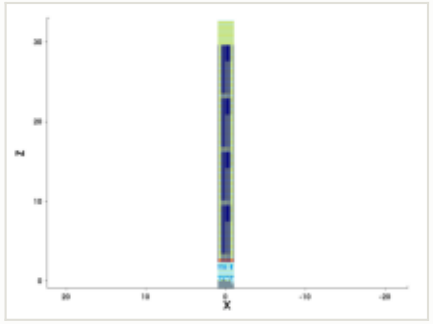

mask for this step

no mask for this step

steps by process area

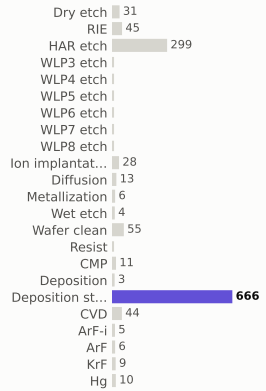

materials deposited (g)

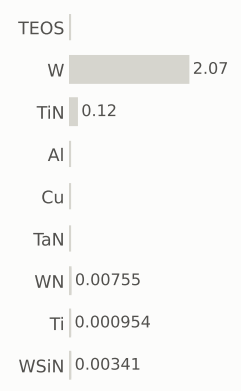

gases emitted (g)

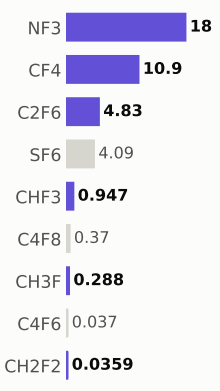

Step #16170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,710.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

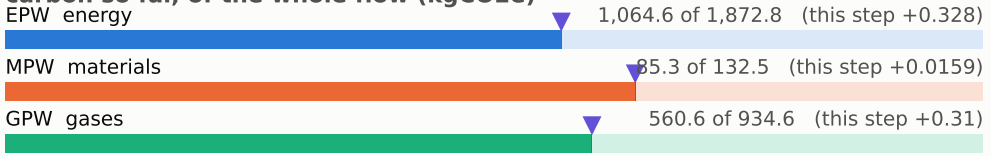

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

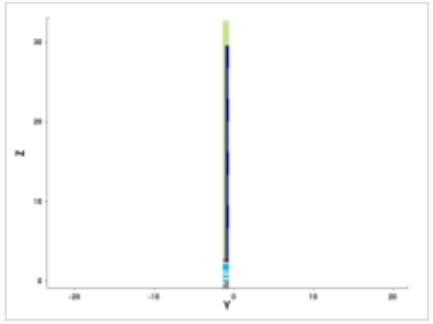

y cut at -1.035 µm

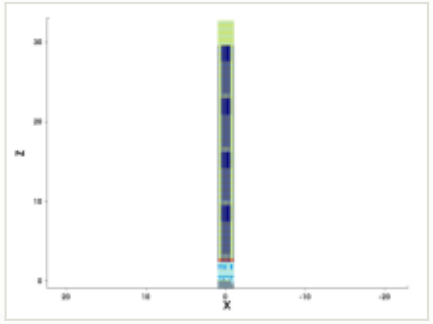

mask for this step

no mask for this step

steps by process area

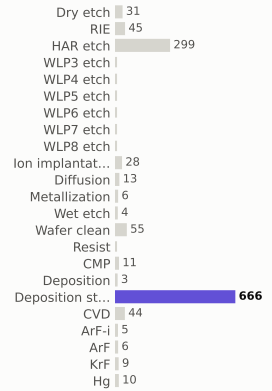

materials deposited (g)

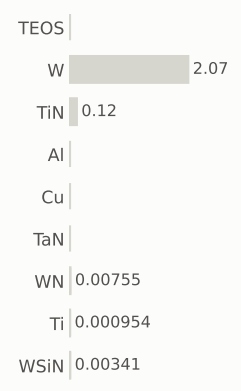

gases emitted (g)

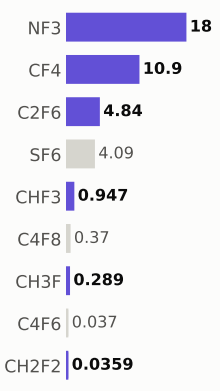

Step #16180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,711.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

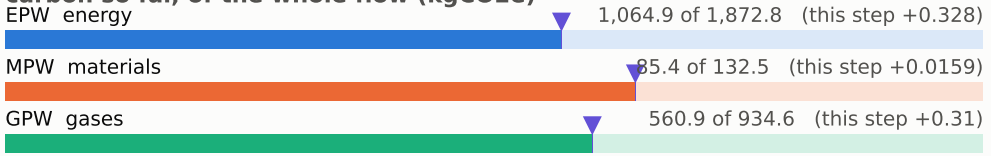

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

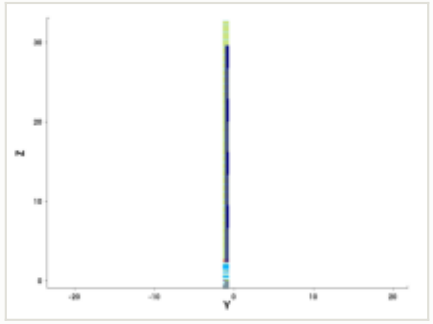

y cut at -1.035 µm

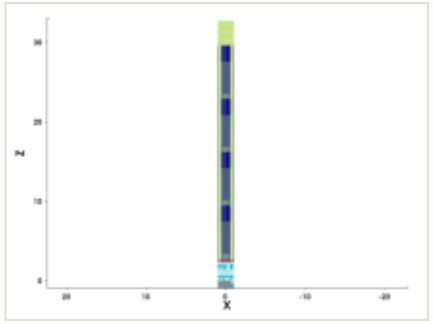

mask for this step

no mask for this step

steps by process area

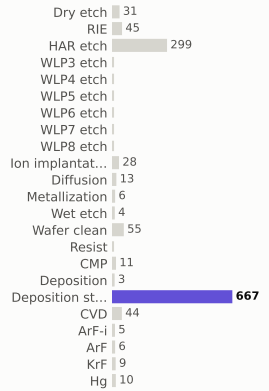

materials deposited (g)

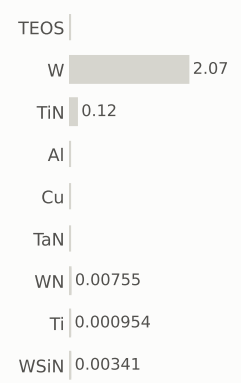

gases emitted (g)

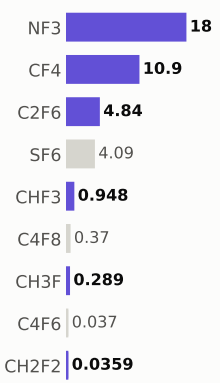

Step #16190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,711.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

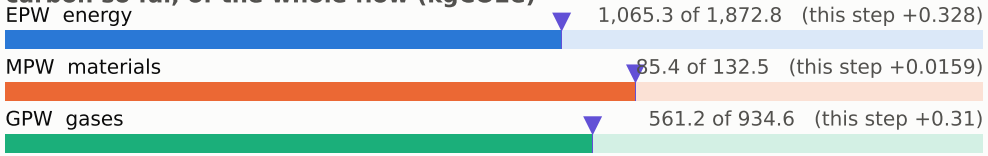

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

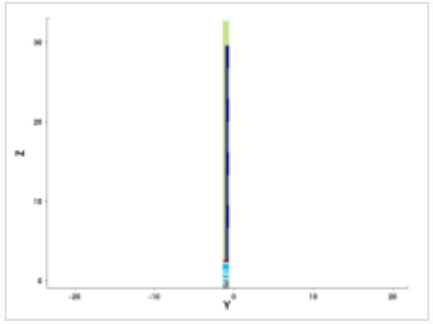

y cut at -1.035 µm

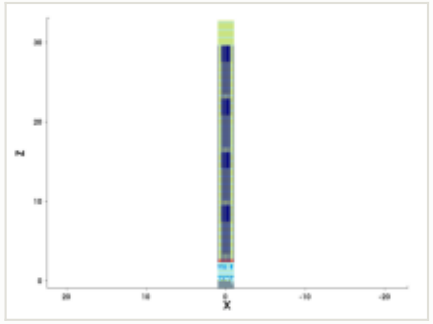

mask for this step

no mask for this step

steps by process area

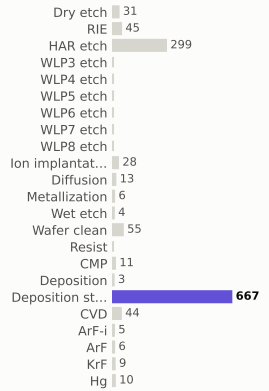

materials deposited (g)

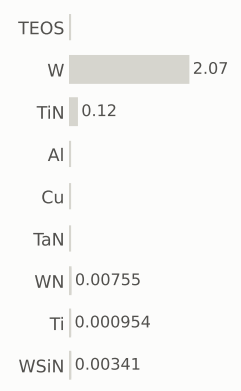

gases emitted (g)

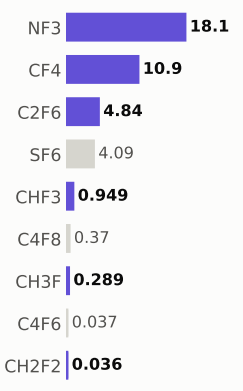

Step #16200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,712.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

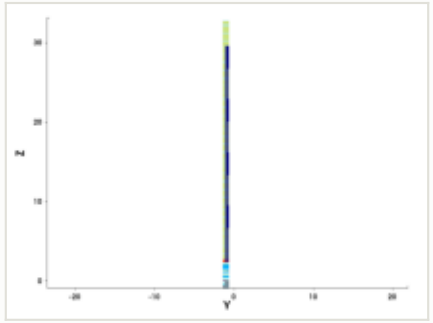

y cut at -1.035 µm

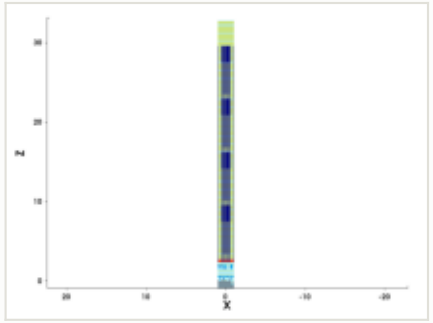

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

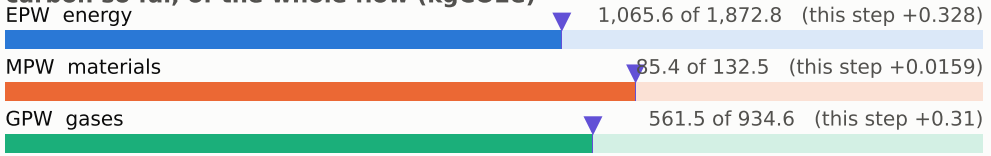

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

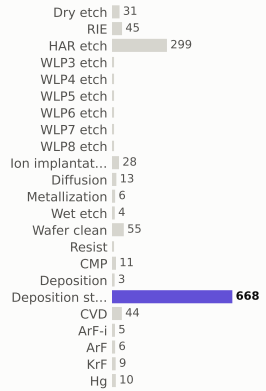

materials deposited (g)

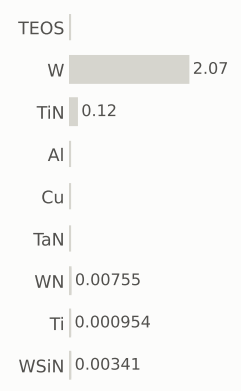

gases emitted (g)

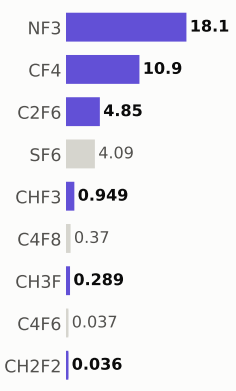

Step #16210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,713.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

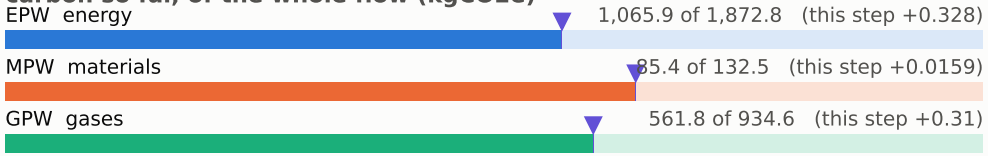

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

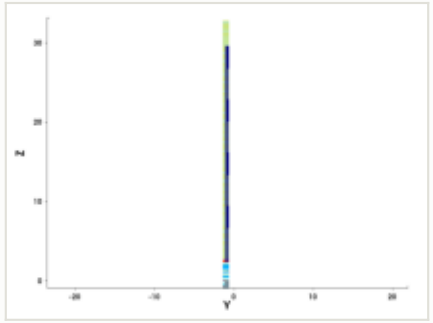

y cut at -1.035 µm

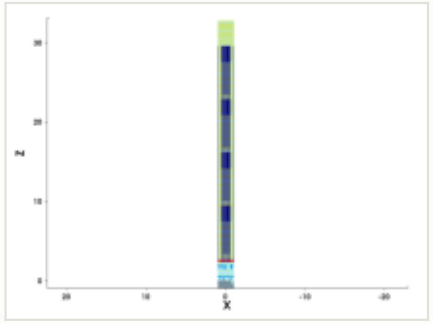

mask for this step

no mask for this step

steps by process area

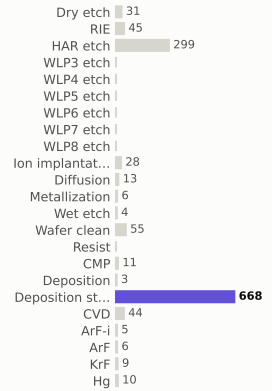

materials deposited (g)

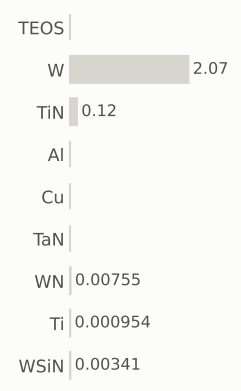

gases emitted (g)

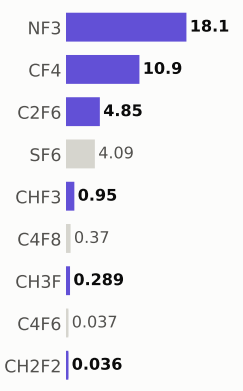

Step #16220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,713.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

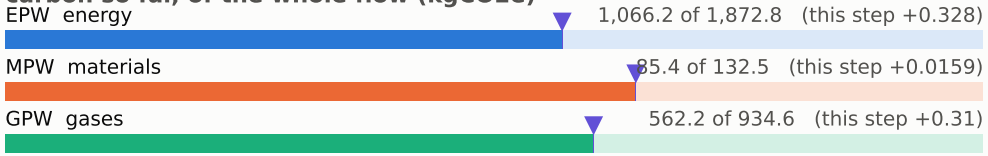

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

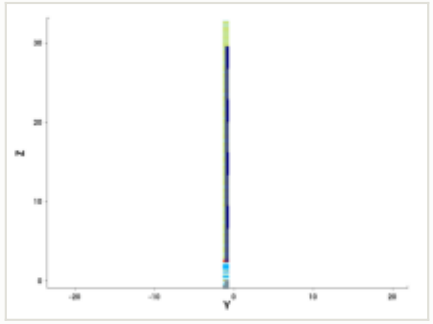

y cut at -1.035 µm

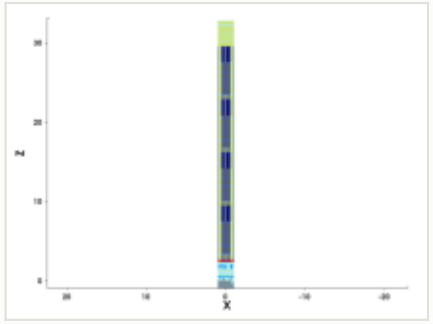

mask for this step

no mask for this step

steps by process area

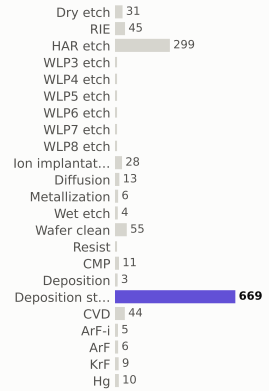

materials deposited (g)

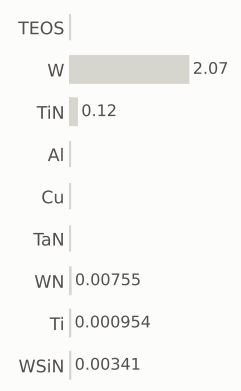

gases emitted (g)

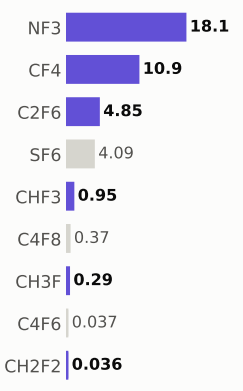

Step #16230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,714.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

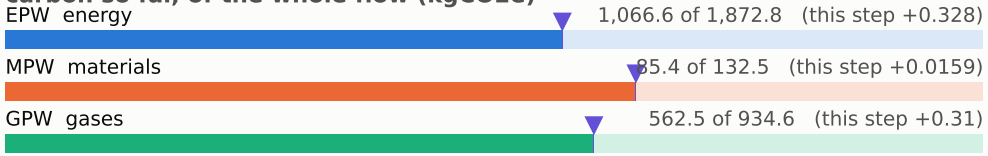

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

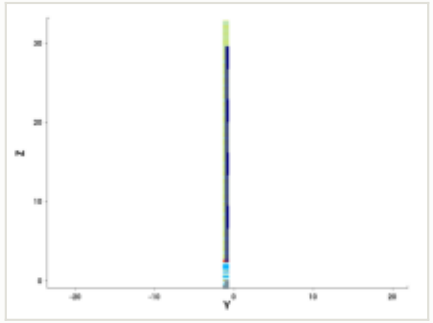

y cut at -1.035 µm

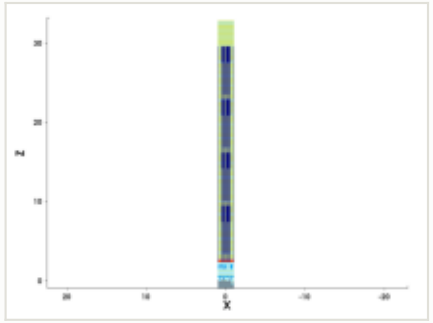

mask for this step

no mask for this step

steps by process area

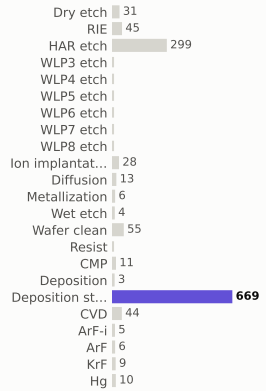

materials deposited (g)

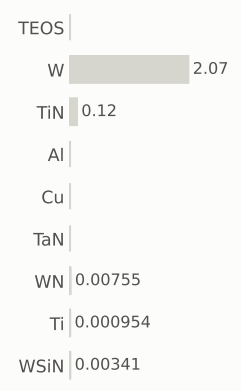

gases emitted (g)

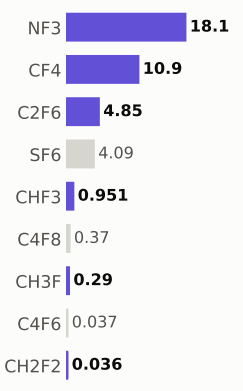

Step #16240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,715.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

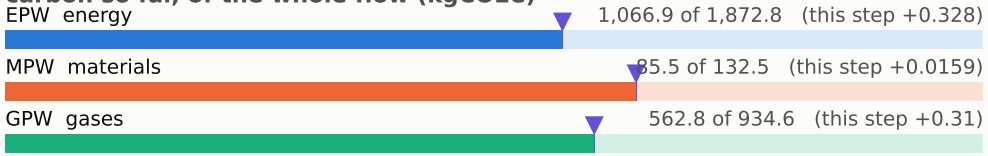

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

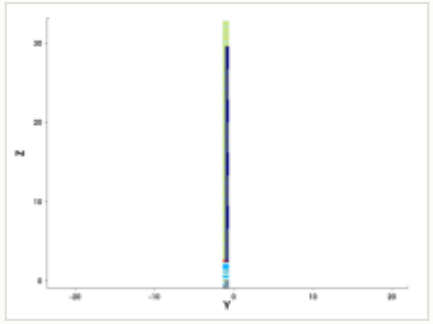

y cut at -1.035 µm

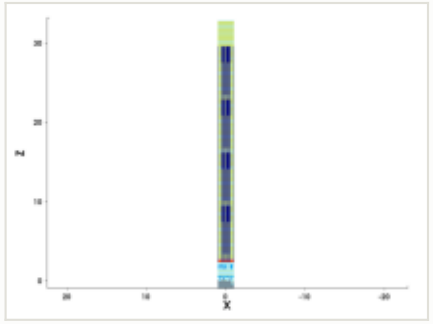

mask for this step

no mask for this step

steps by process area

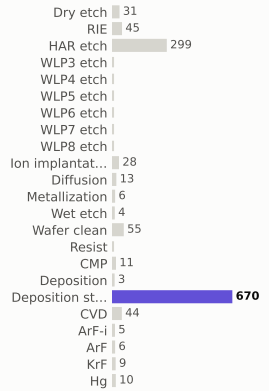

materials deposited (g)

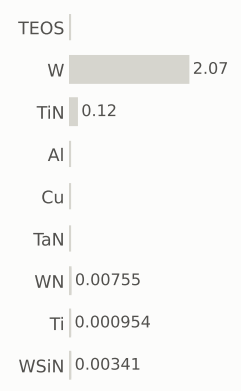

gases emitted (g)

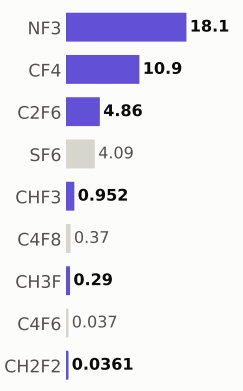

Step #16250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,715.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

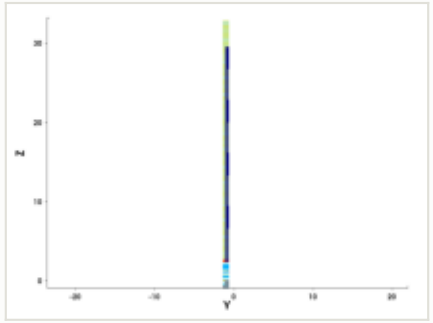

y cut at -1.035 µm

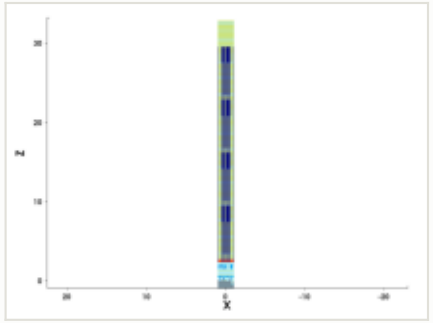

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

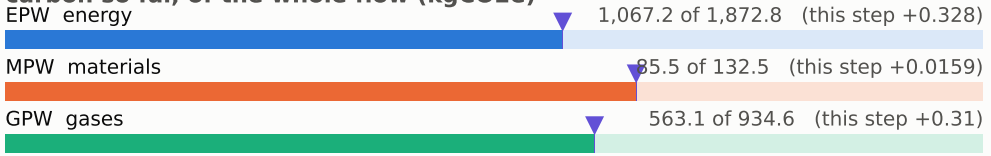

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

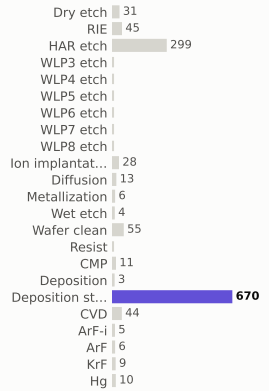

materials deposited (g)

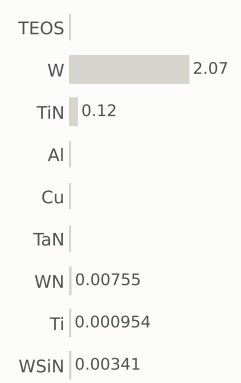

gases emitted (g)

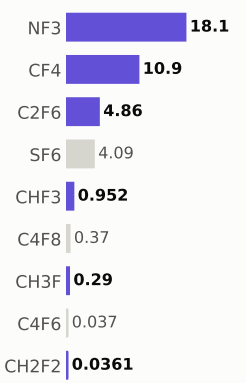

Step #16260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,716.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

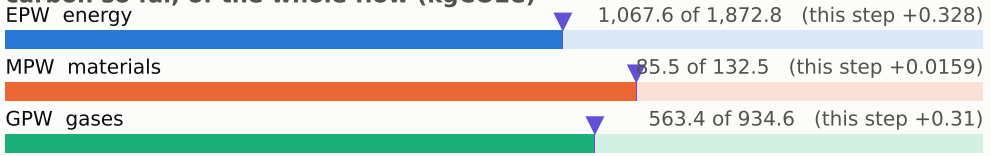

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

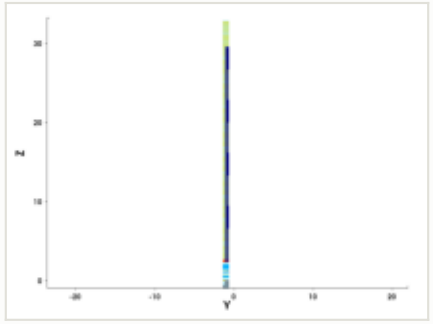

y cut at -1.035 µm

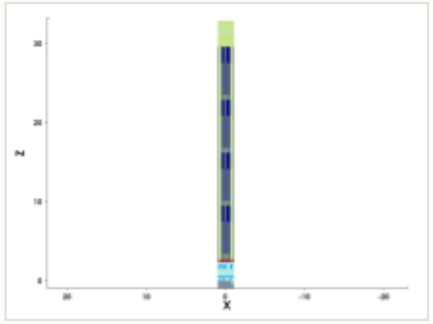

mask for this step

no mask for this step

steps by process area

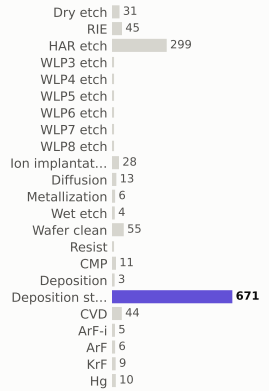

materials deposited (g)

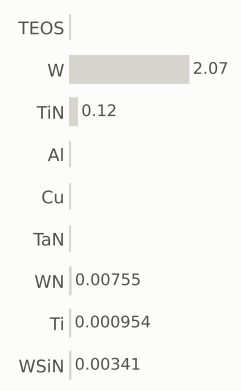

gases emitted (g)

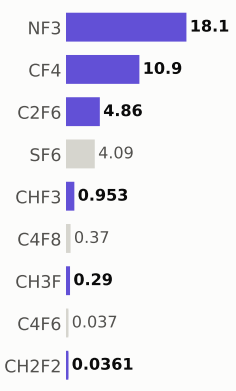

Step #16270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,717.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

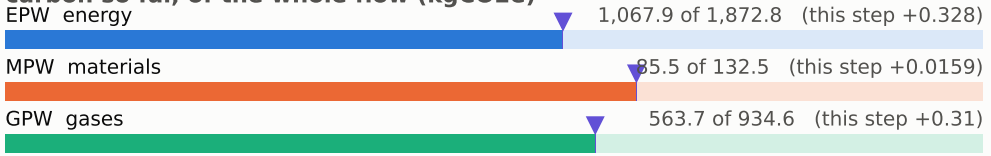

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

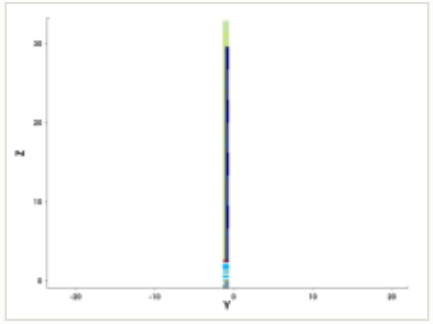

y cut at -1.035 µm

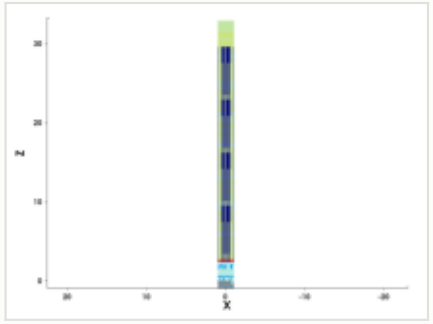

mask for this step

no mask for this step

steps by process area

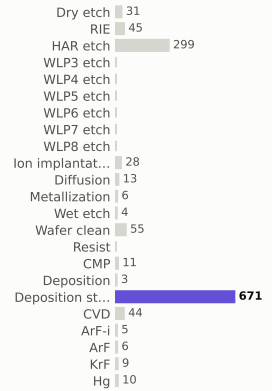

materials deposited (g)

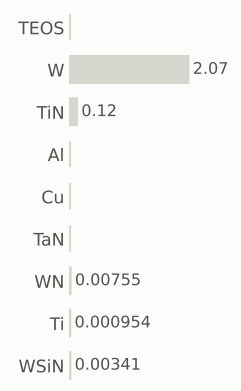

gases emitted (g)

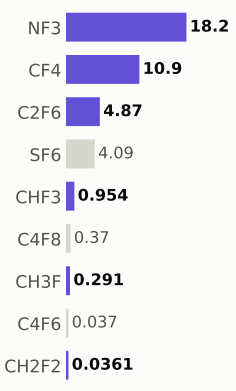

Step #16280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,717.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

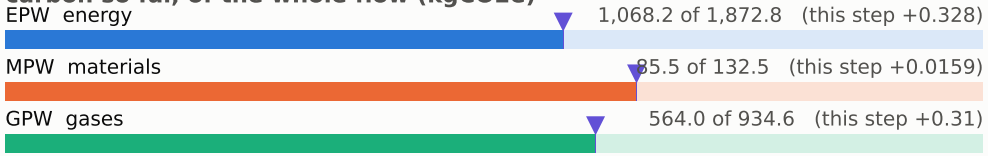

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

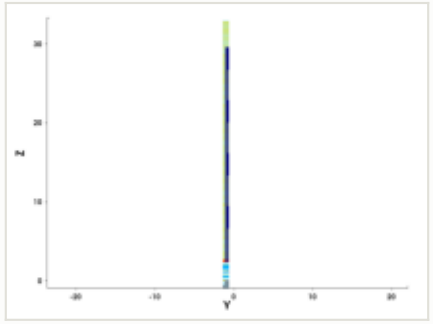

y cut at -1.035 µm

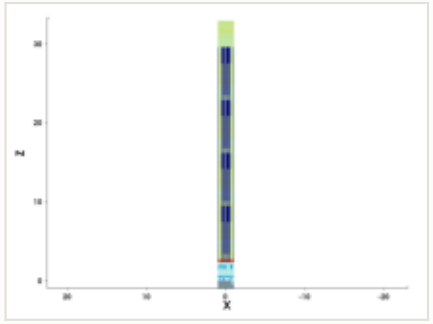

mask for this step

no mask for this step

steps by process area

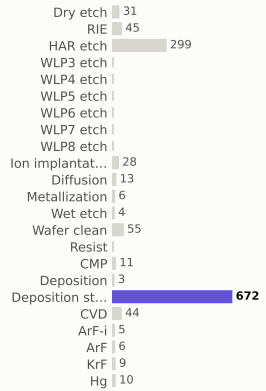

materials deposited (g)

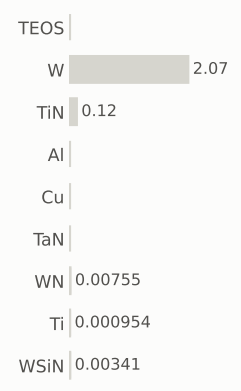

gases emitted (g)

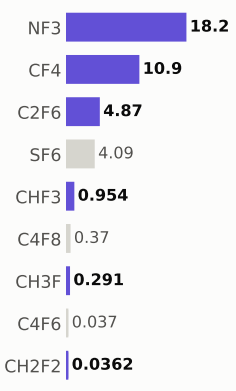

Step #16290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,718.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

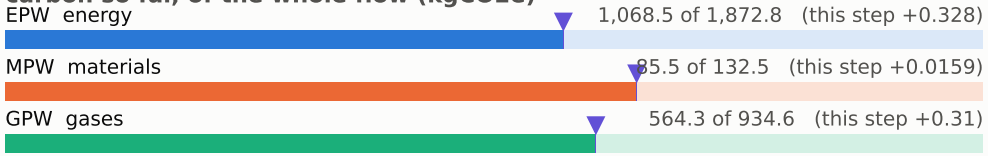

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

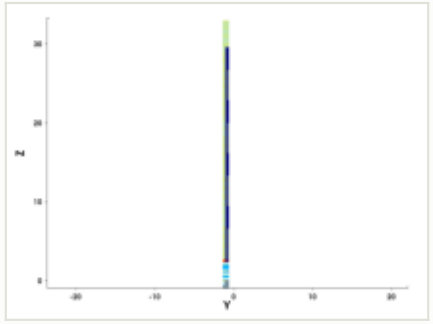

y cut at -1.035 µm

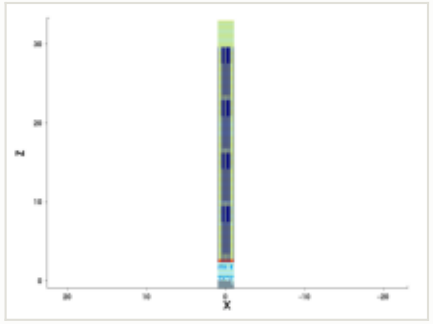

mask for this step

no mask for this step

steps by process area

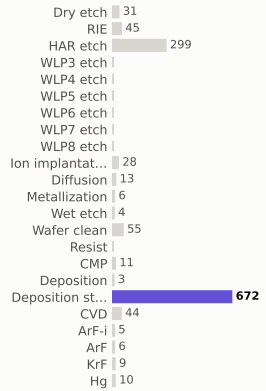

materials deposited (g)

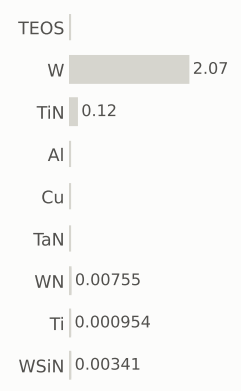

gases emitted (g)

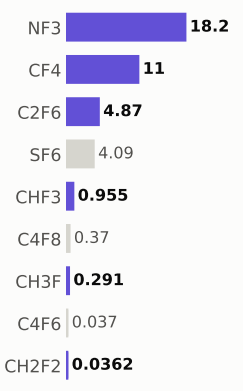

Step #16300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,719.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

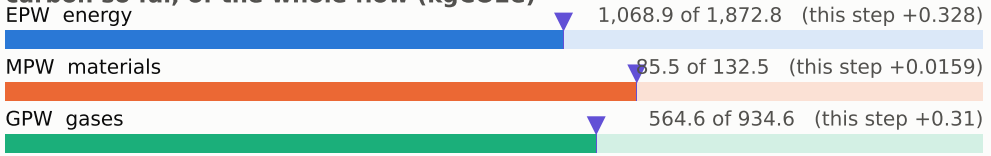

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

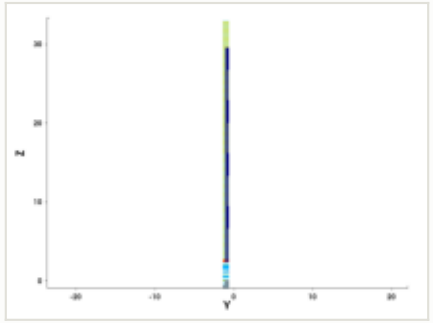

y cut at -1.035 µm

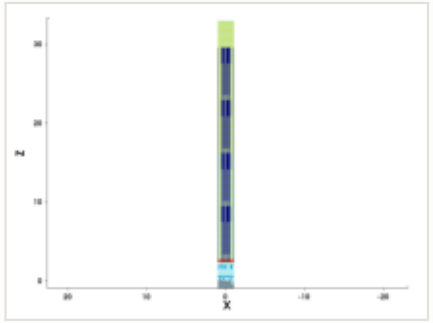

mask for this step

no mask for this step

steps by process area

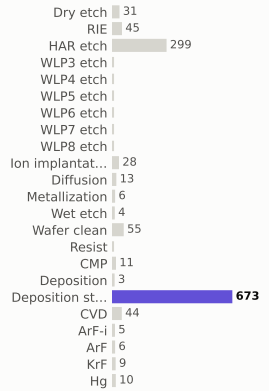

materials deposited (g)

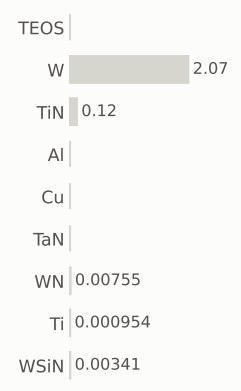

gases emitted (g)

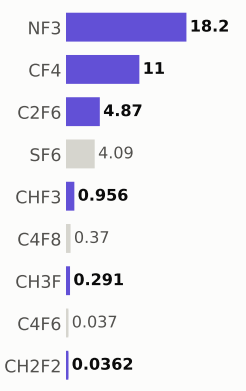

Step #16310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,719.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

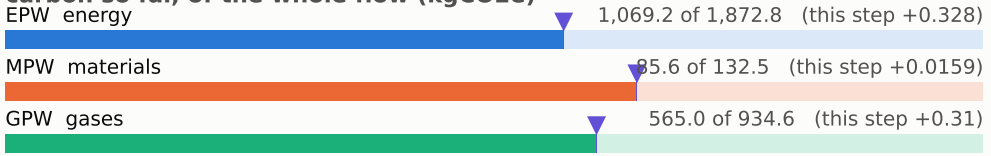

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

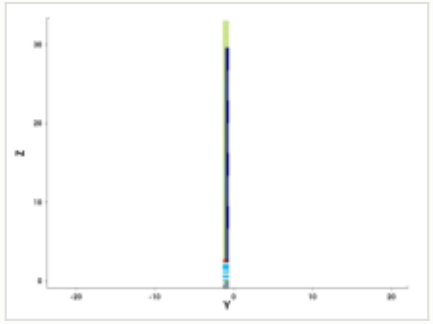

y cut at -1.035 µm

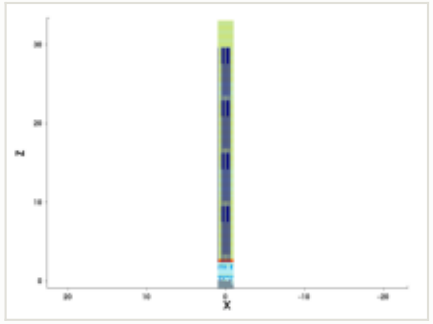

mask for this step

no mask for this step

steps by process area

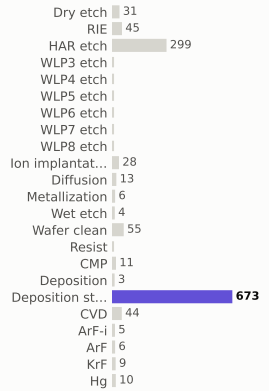

materials deposited (g)

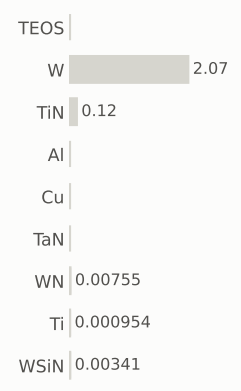

gases emitted (g)

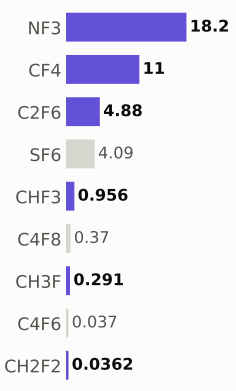

Step #16320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,720.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

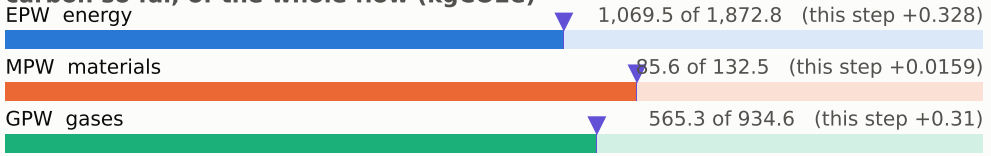

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

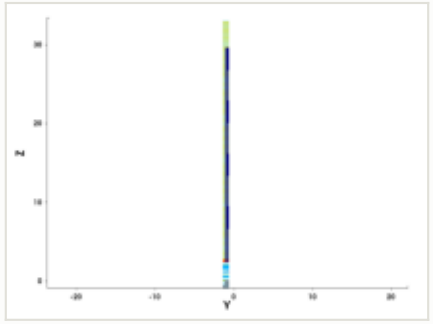

y cut at -1.035 µm

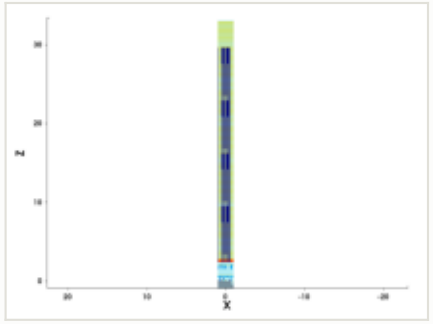

mask for this step

no mask for this step

steps by process area

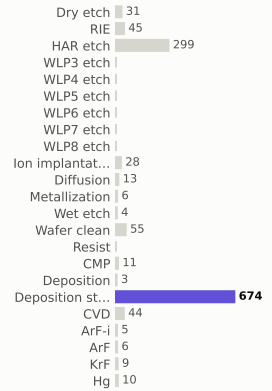

materials deposited (g)

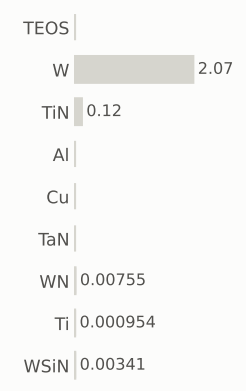

gases emitted (g)

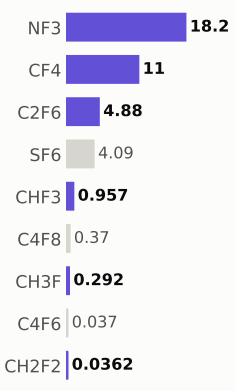

Step #16330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,721.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

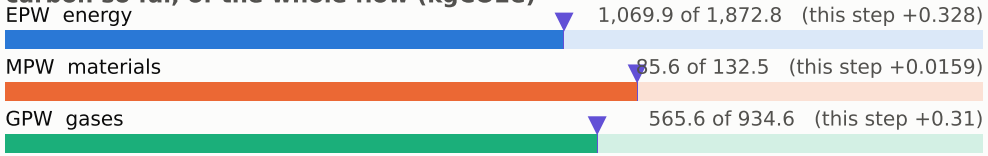

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

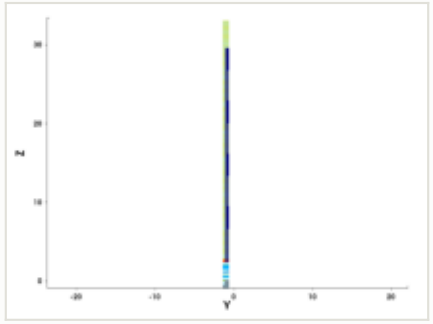

y cut at -1.035 µm

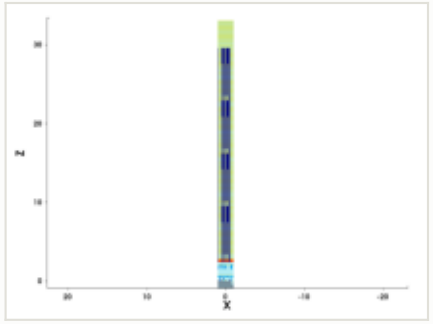

mask for this step

no mask for this step

steps by process area

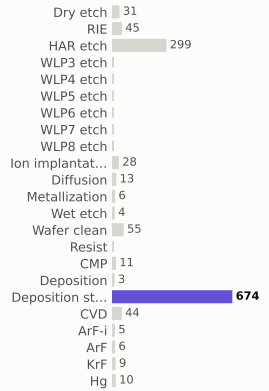

materials deposited (g)

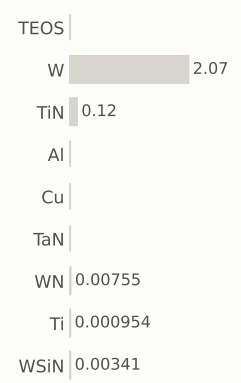

gases emitted (g)

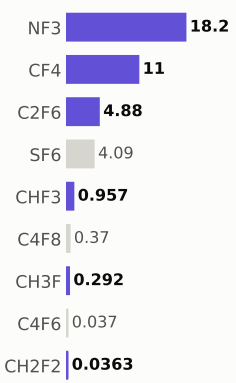

Step #16340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,721.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

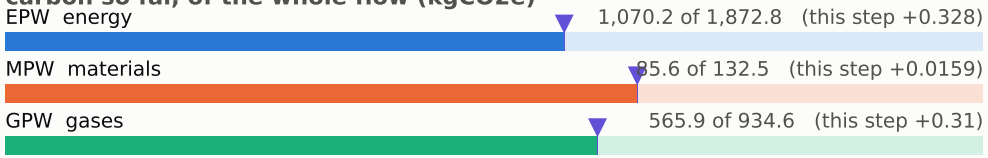

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

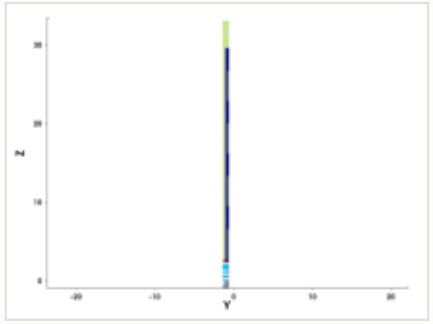

y cut at -1.035 µm

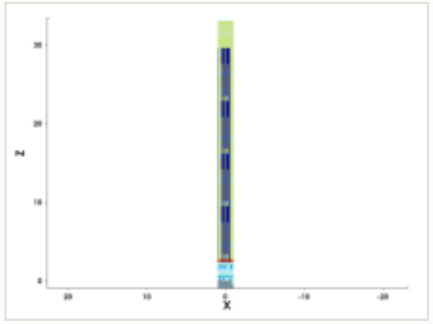

mask for this step

no mask for this step

steps by process area

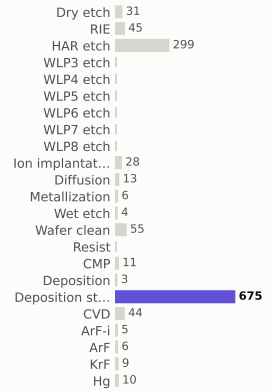

materials deposited (g)

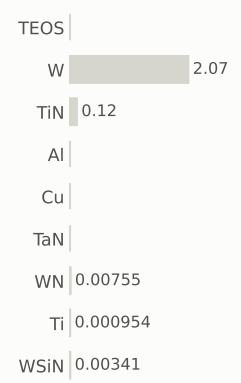

gases emitted (g)

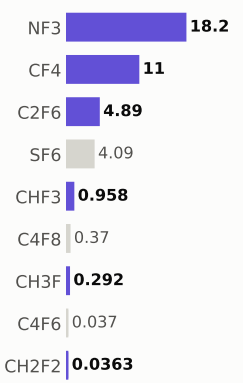

Step #16350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,722.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

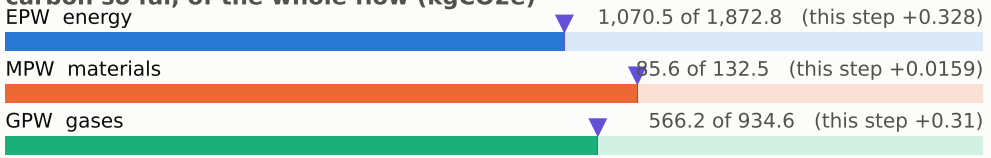

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

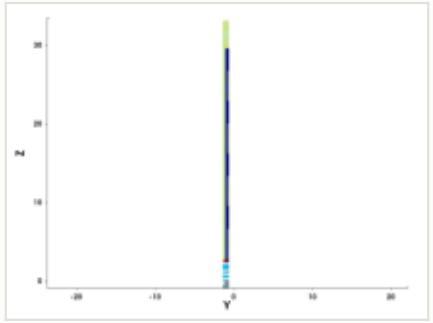

y cut at -1.035 µm

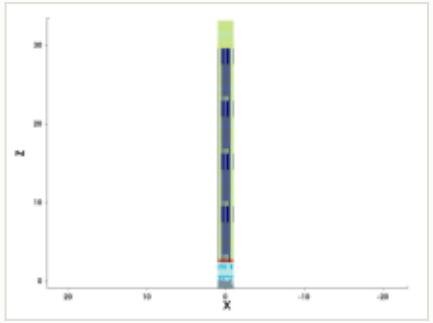

mask for this step

no mask for this step

steps by process area

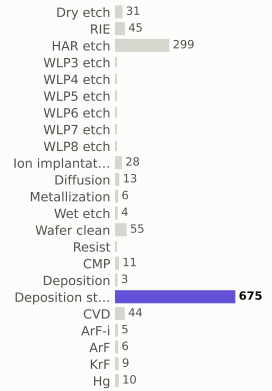

materials deposited (g)

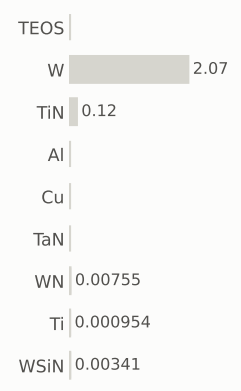

gases emitted (g)

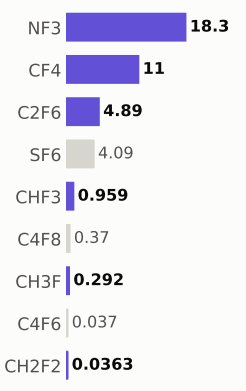

Step #16360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,723.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

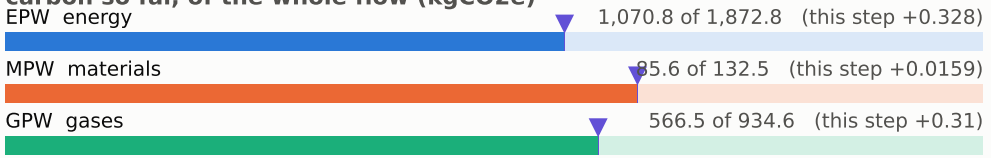

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

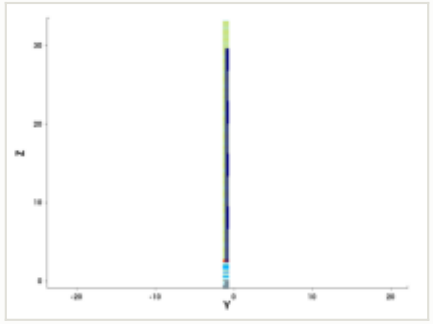

y cut at -1.035 µm

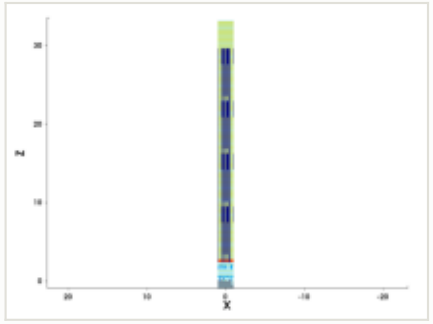

mask for this step

no mask for this step

steps by process area

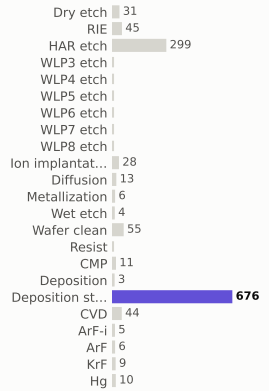

materials deposited (g)

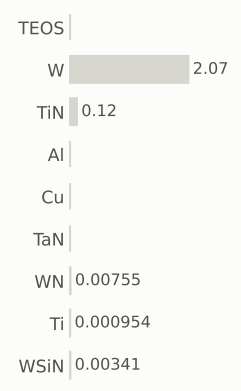

gases emitted (g)

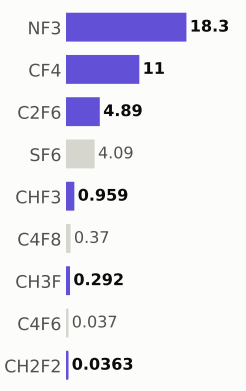

Step #16370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,723.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

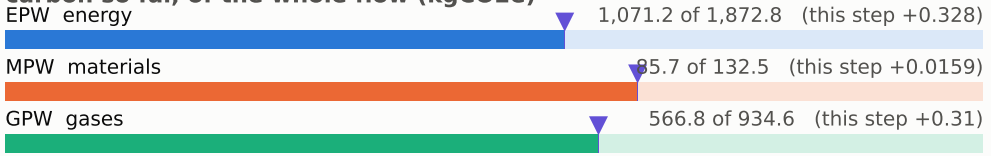

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

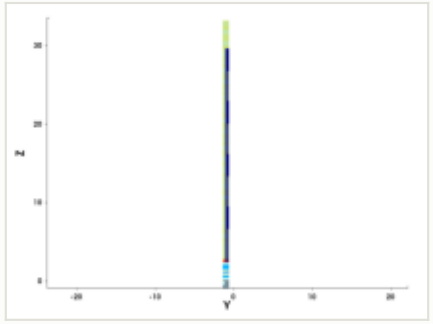

y cut at -1.035 µm

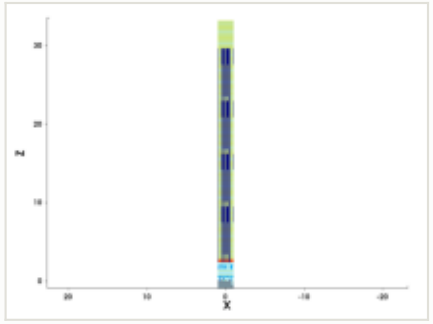

mask for this step

no mask for this step

steps by process area

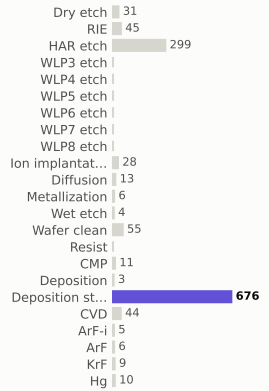

materials deposited (g)

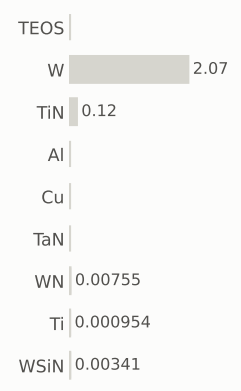

gases emitted (g)

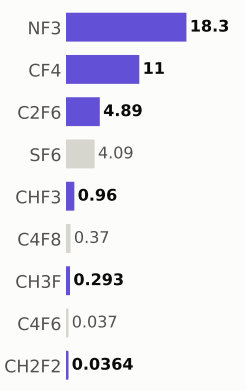

Step #16380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,724.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

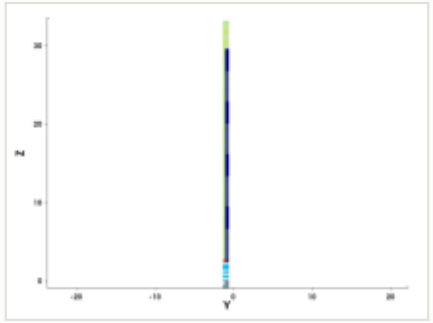

y cut at -1.035 µm

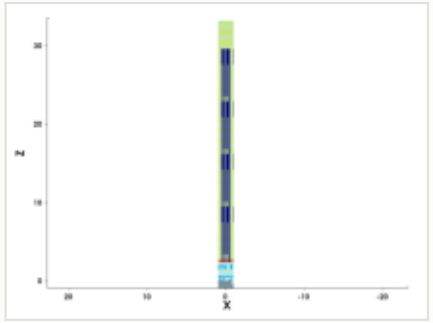

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

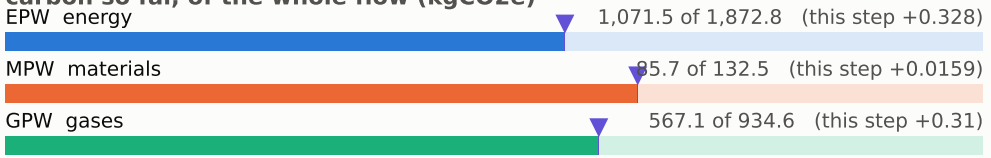

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

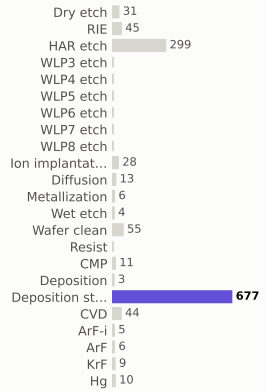

materials deposited (g)

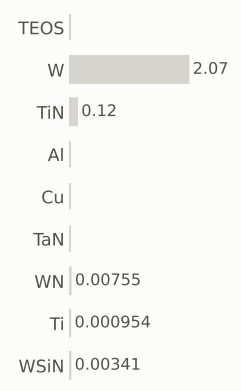

gases emitted (g)

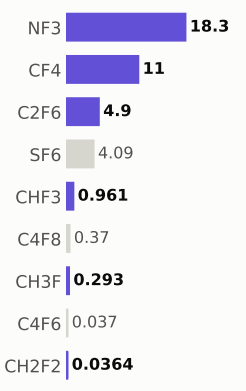

Step #16390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,724.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

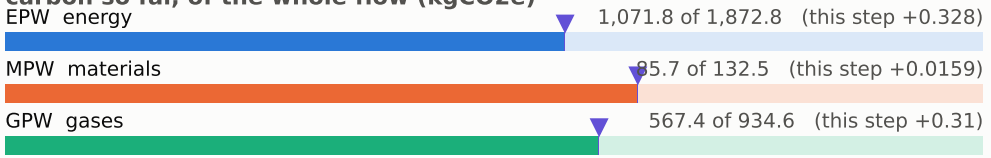

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

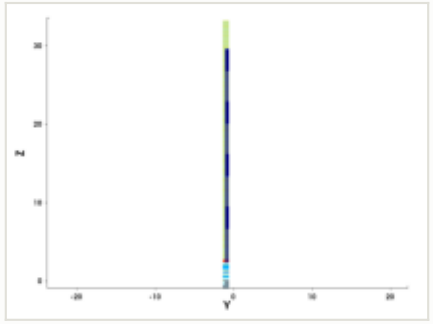

y cut at -1.035 µm

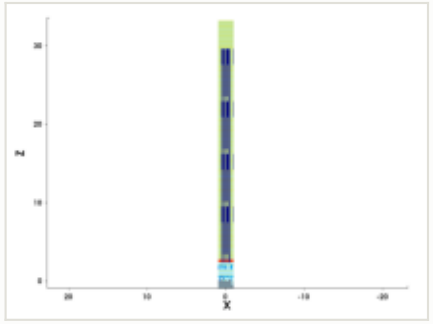

mask for this step

no mask for this step

steps by process area

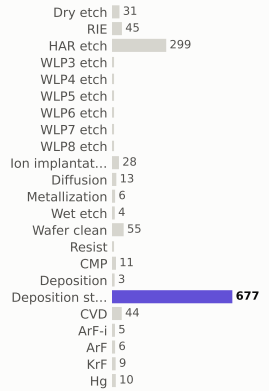

materials deposited (g)

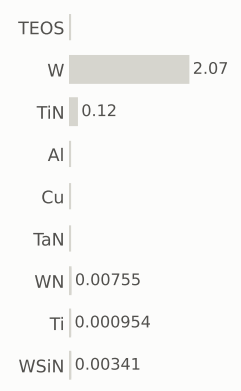

gases emitted (g)

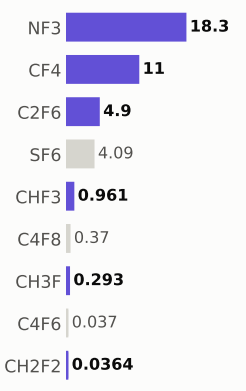

Step #16400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,725.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

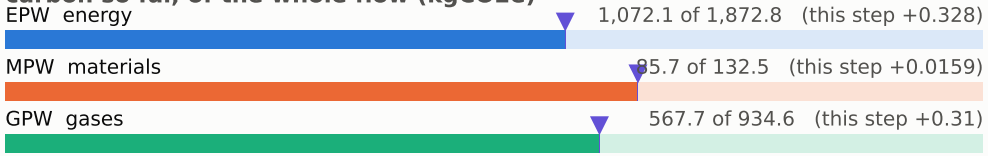

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

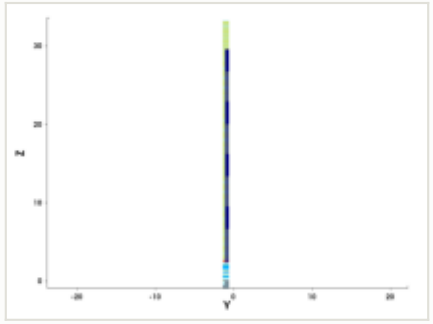

y cut at -1.035 µm

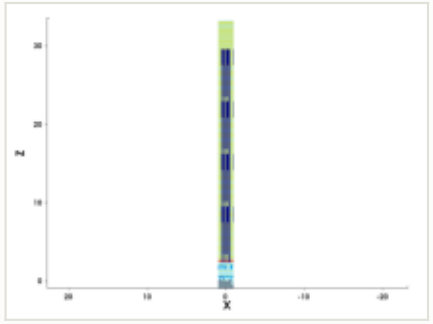

mask for this step

no mask for this step

steps by process area

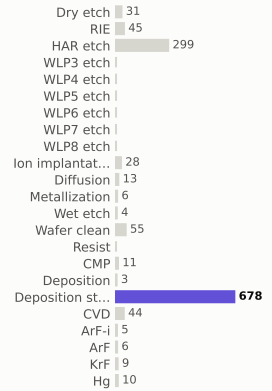

materials deposited (g)

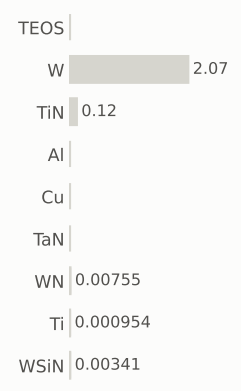

gases emitted (g)

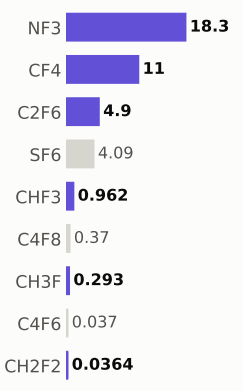

Step #16410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,726.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

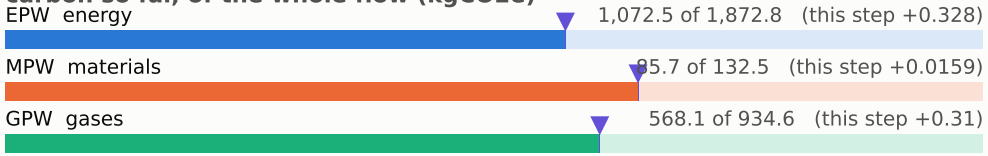

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

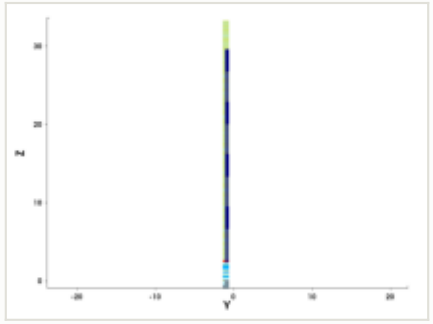

y cut at -1.035 µm

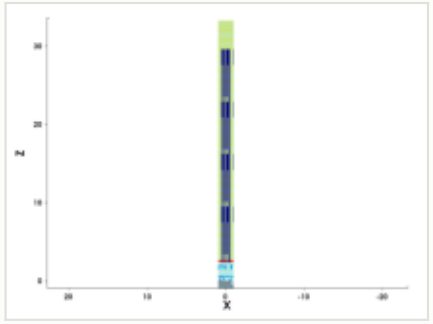

mask for this step

no mask for this step

steps by process area

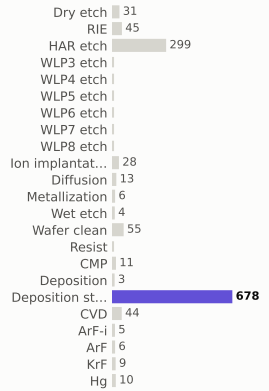

materials deposited (g)

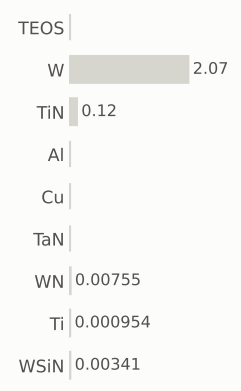

gases emitted (g)

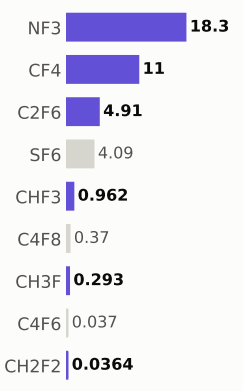

Step #16420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,726.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

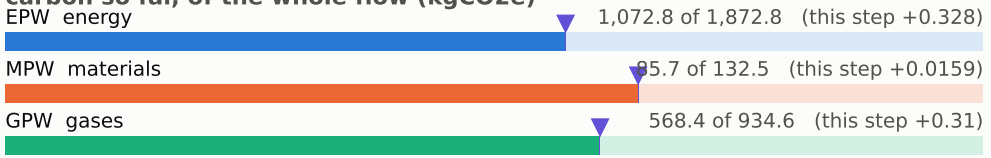

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

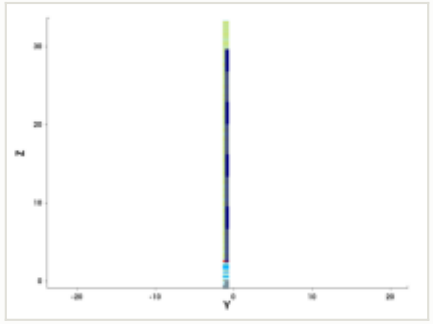

y cut at -1.035 µm

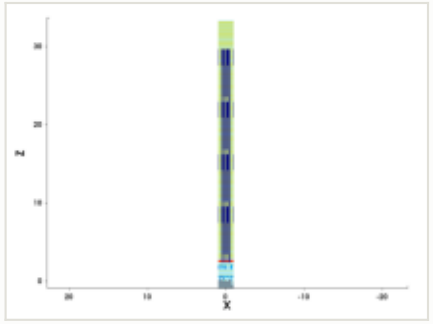

mask for this step

no mask for this step

steps by process area

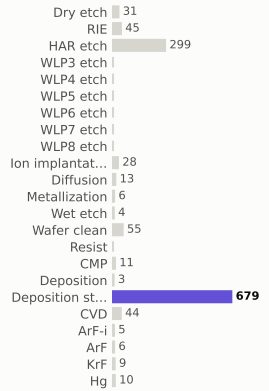

materials deposited (g)

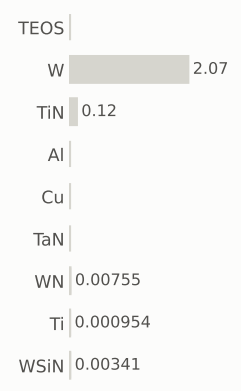

gases emitted (g)

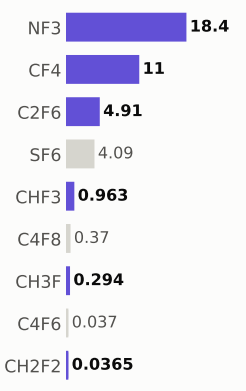

Step #16430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,727.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

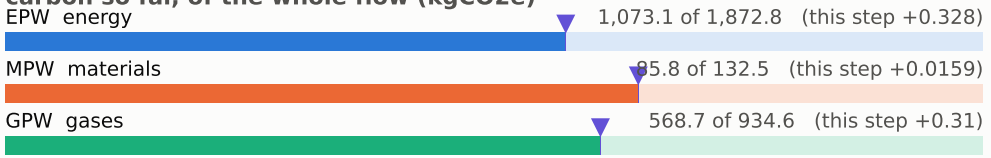

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

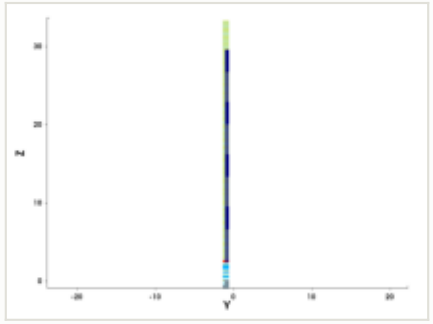

y cut at -1.035 µm

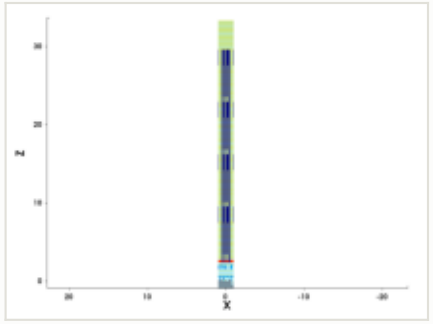

mask for this step

no mask for this step

steps by process area

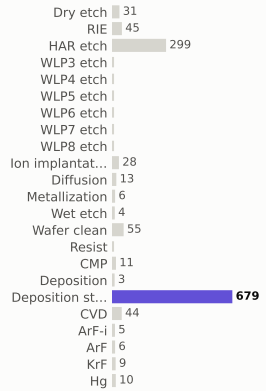

materials deposited (g)

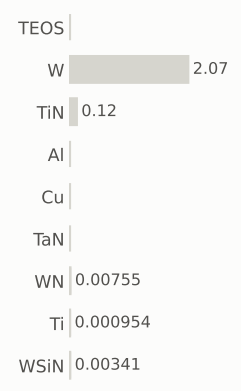

gases emitted (g)

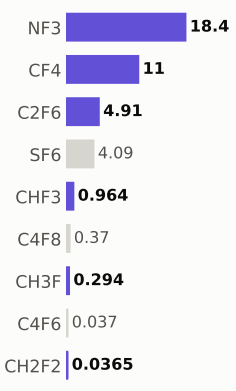

Step #16440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,728.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

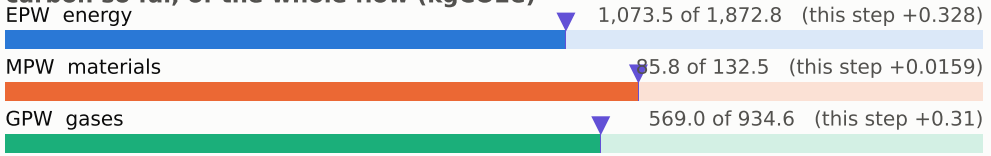

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

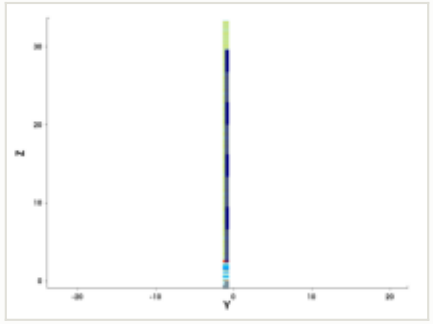

y cut at -1.035 µm

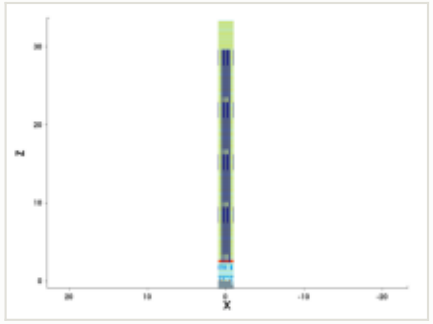

mask for this step

no mask for this step

steps by process area

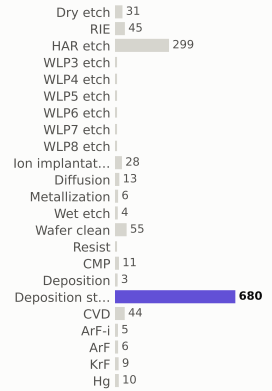

materials deposited (g)

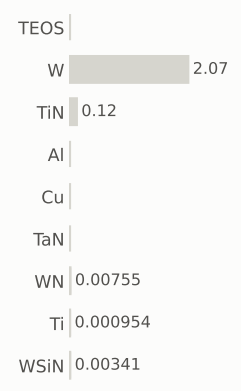

gases emitted (g)

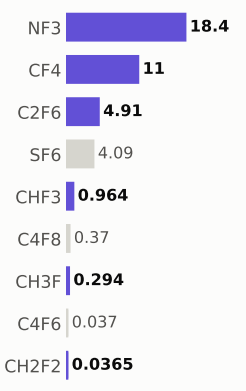

Step #16450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,728.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

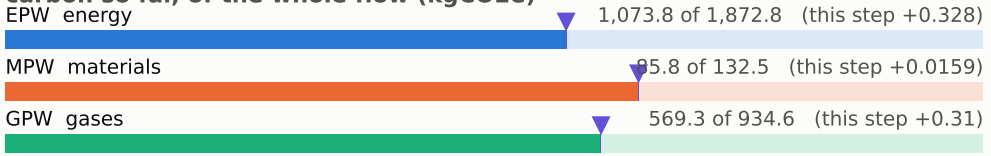

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

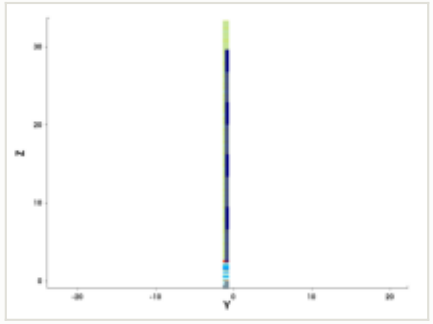

y cut at -1.035 µm

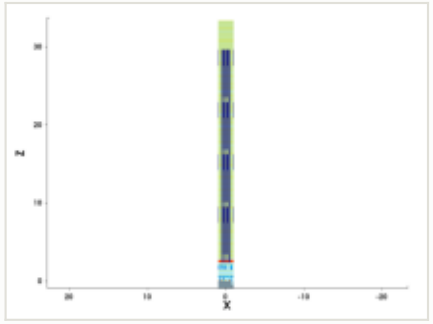

mask for this step

no mask for this step

steps by process area

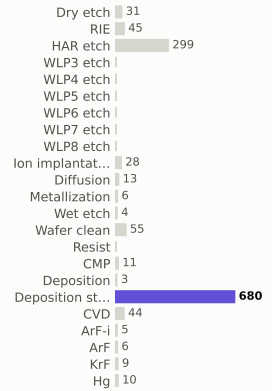

materials deposited (g)

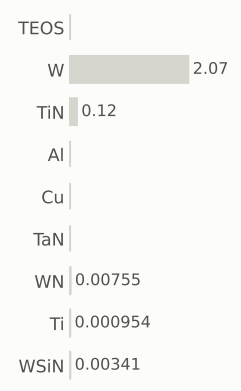

gases emitted (g)

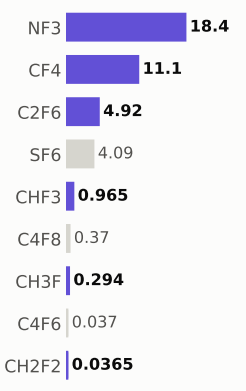

Step #16460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,729.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

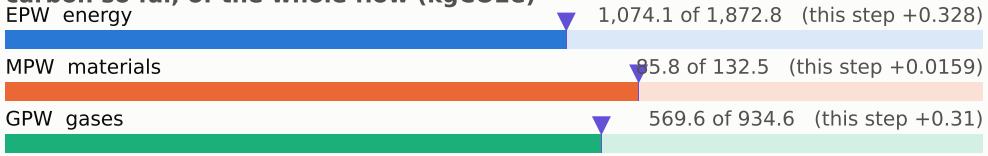

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

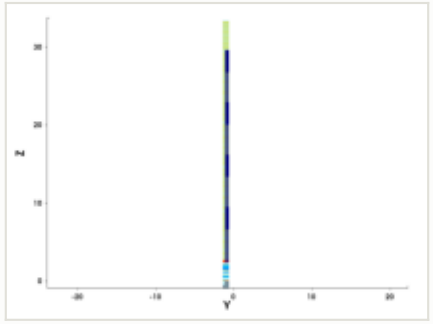

y cut at -1.035 µm

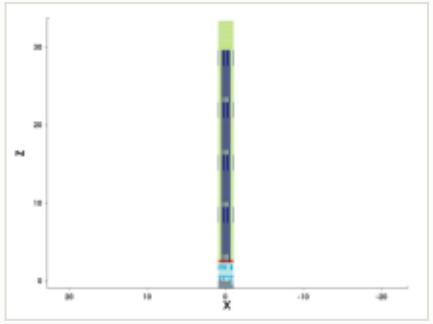

mask for this step

no mask for this step

steps by process area

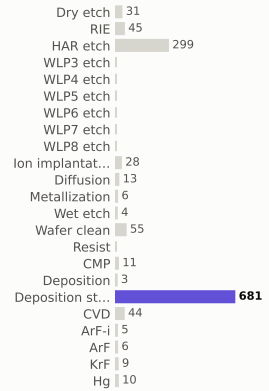

materials deposited (g)

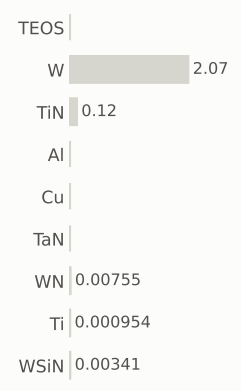

gases emitted (g)

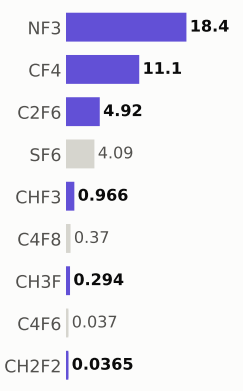

Step #16470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,730.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

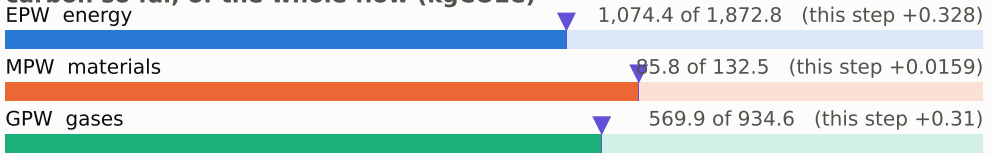

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

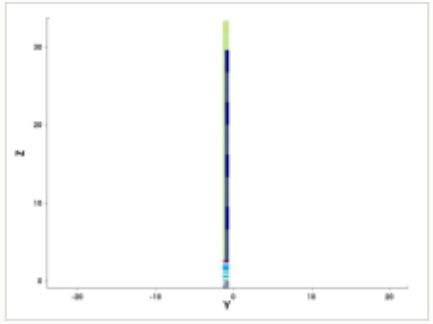

y cut at -1.035 µm

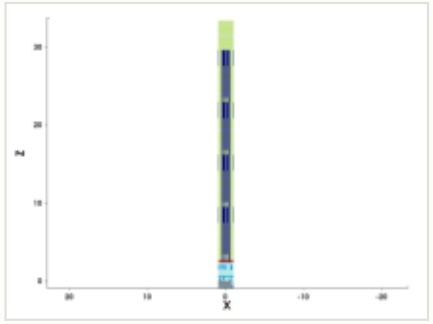

mask for this step

no mask for this step

steps by process area

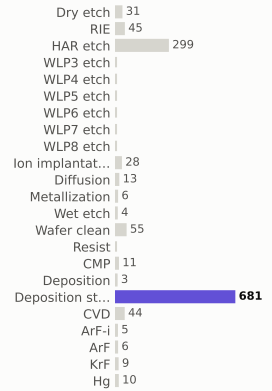

materials deposited (g)

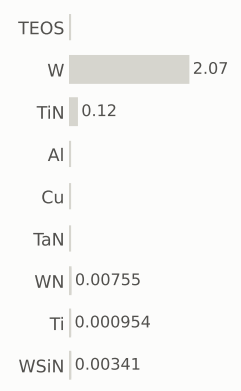

gases emitted (g)

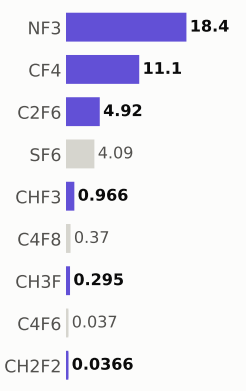

Step #16480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,730.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

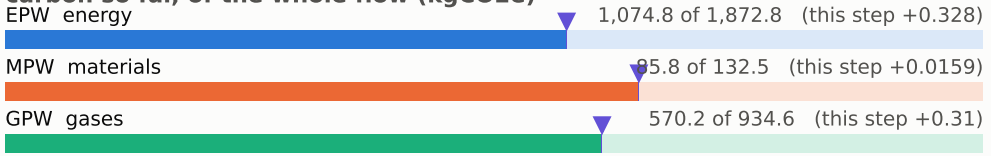

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

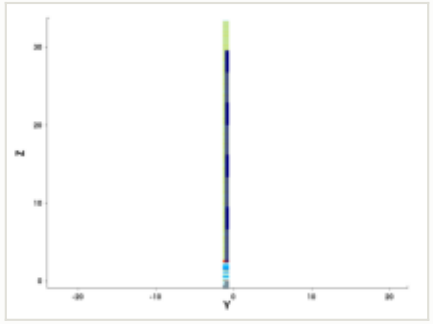

y cut at -1.035 µm

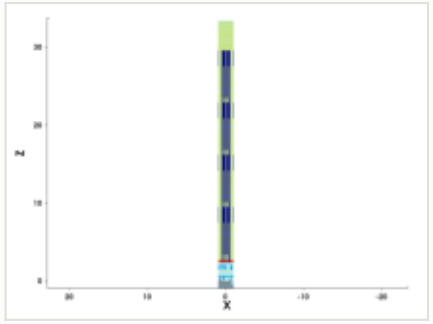

mask for this step

no mask for this step

steps by process area

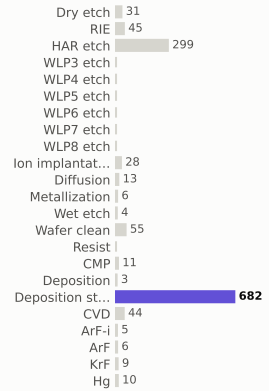

materials deposited (g)

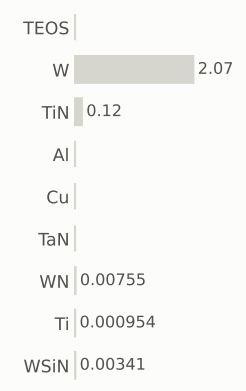

gases emitted (g)

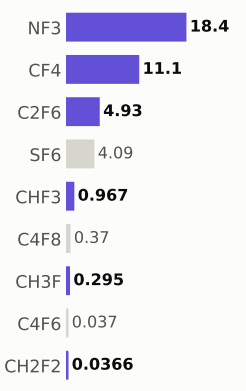

Step #16490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,731.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

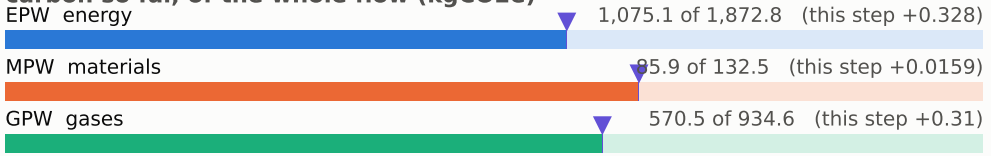

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

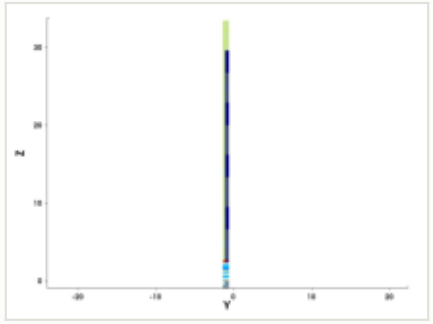

y cut at -1.035 µm

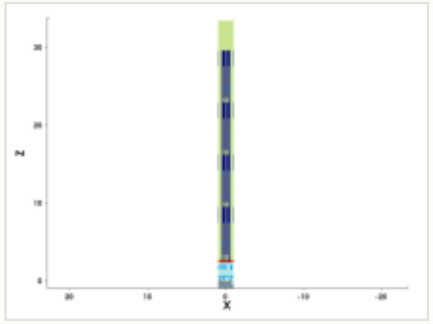

mask for this step

no mask for this step

steps by process area

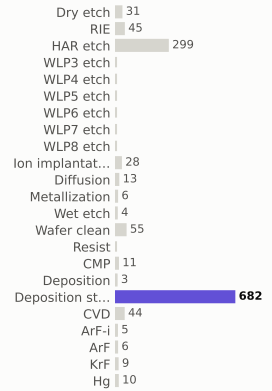

materials deposited (g)

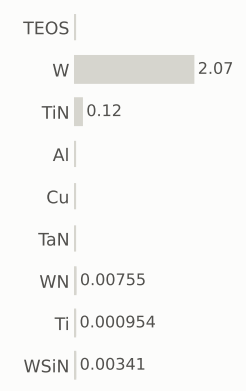

gases emitted (g)

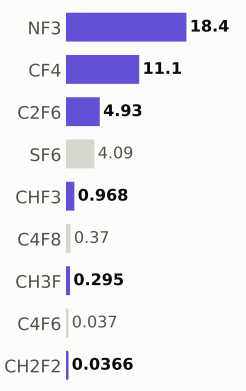

Step #16500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,732.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

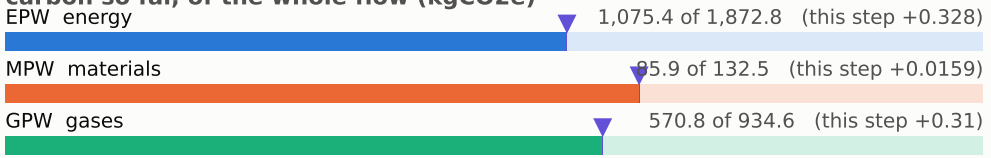

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

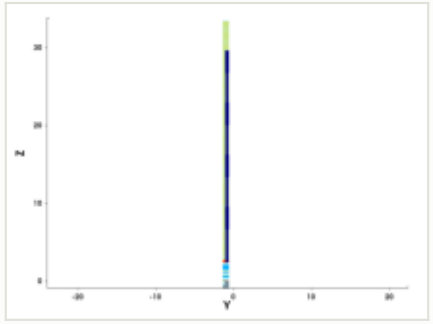

y cut at -1.035 µm

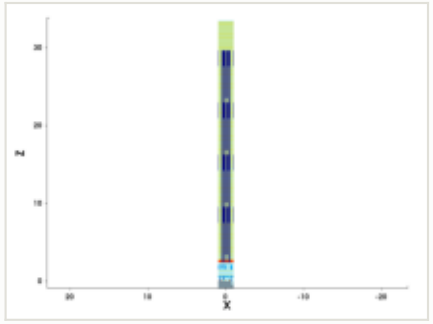

mask for this step

no mask for this step

steps by process area

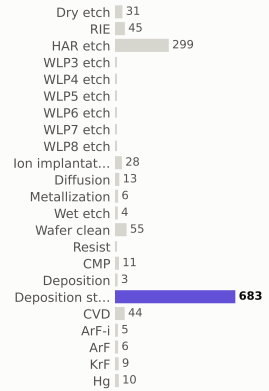

materials deposited (g)

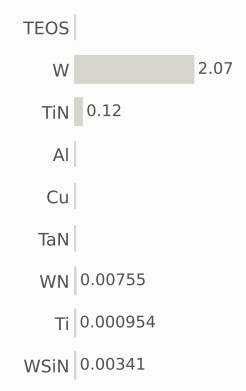

gases emitted (g)

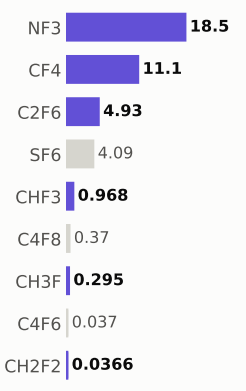

Step #16510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,732.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

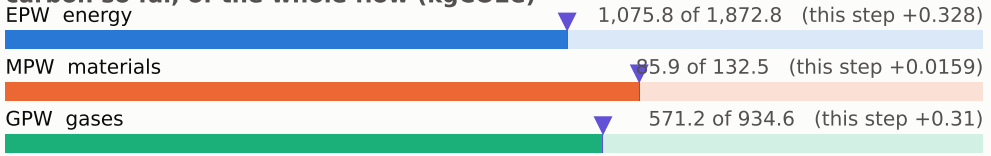

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

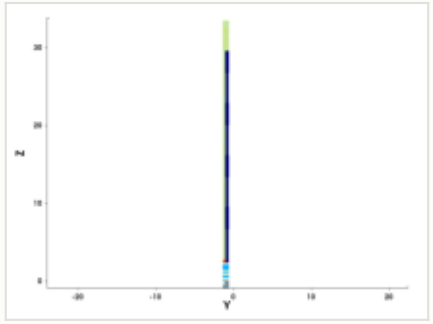

y cut at -1.035 µm

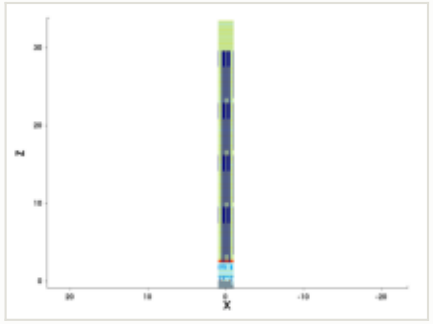

mask for this step

no mask for this step

steps by process area

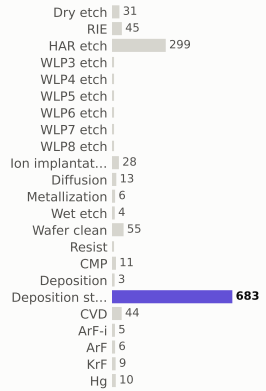

materials deposited (g)

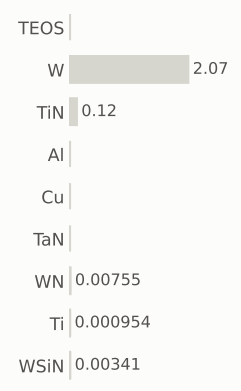

gases emitted (g)

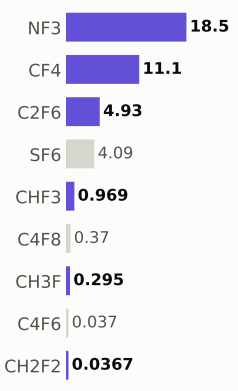

Step #16520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,733.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

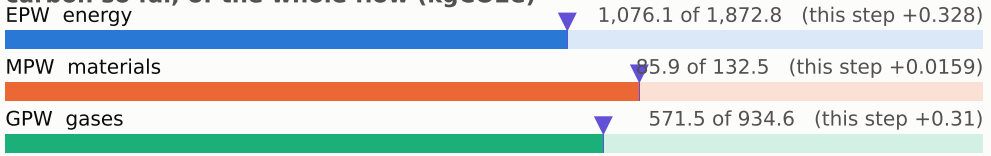

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

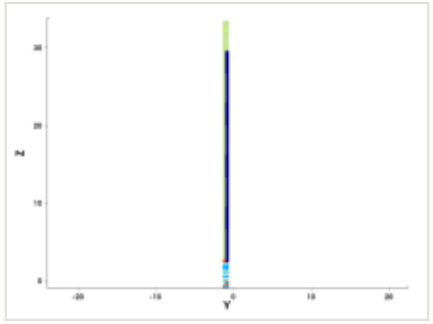

y cut at -1.035 µm

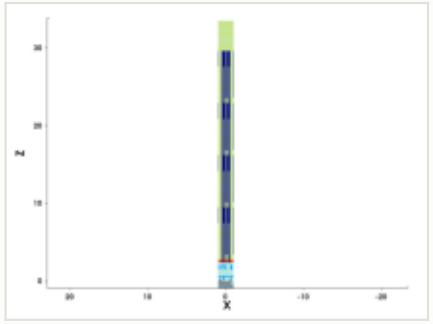

mask for this step

no mask for this step

steps by process area

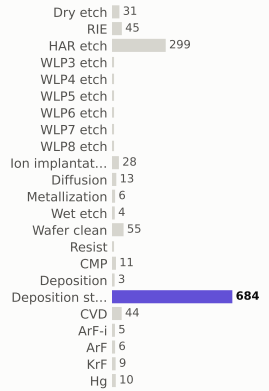

materials deposited (g)

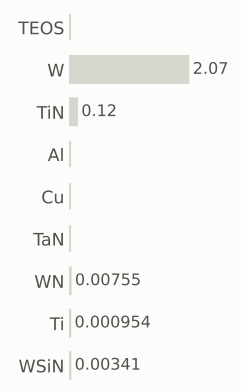

gases emitted (g)

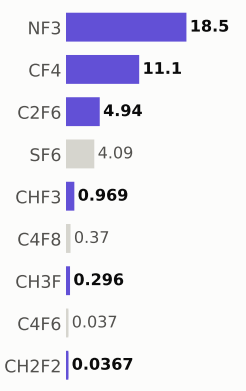

Step #16530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,734.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

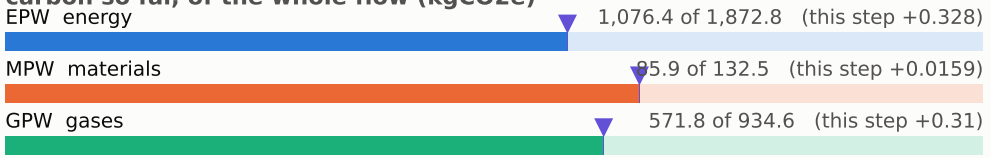

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

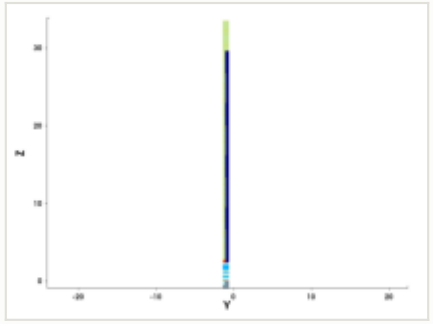

y cut at -1.035 µm

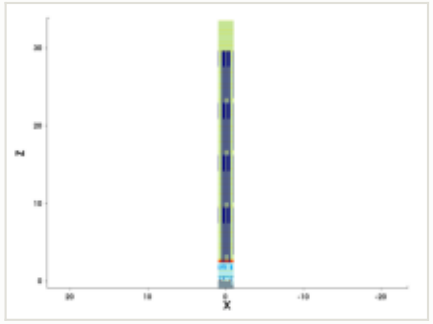

mask for this step

no mask for this step

steps by process area

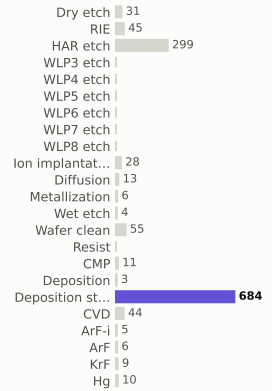

materials deposited (g)

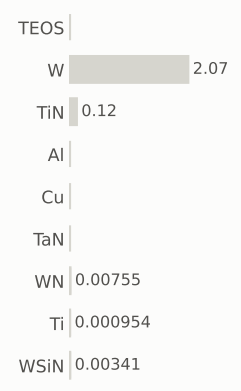

gases emitted (g)

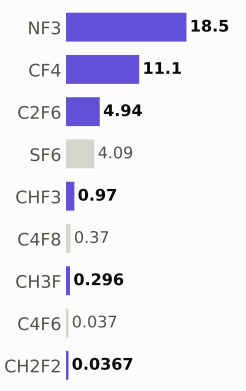

Step #16540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,734.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

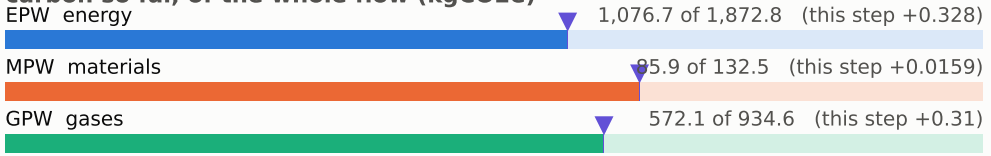

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

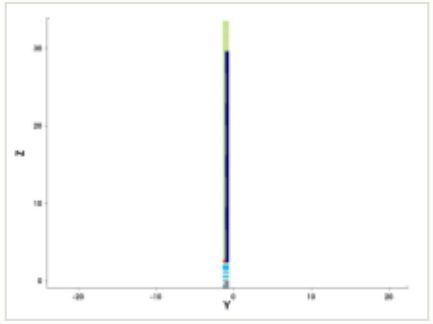

y cut at -1.035 µm

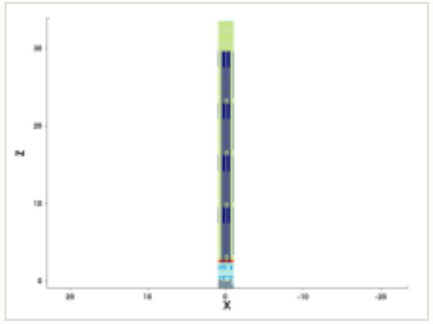

mask for this step

no mask for this step

steps by process area

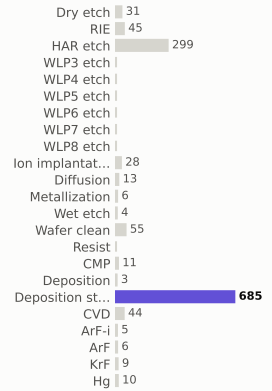

materials deposited (g)

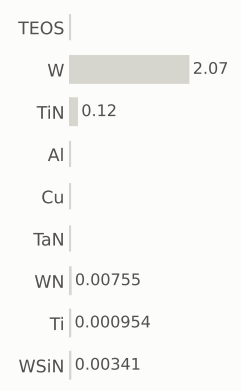

gases emitted (g)

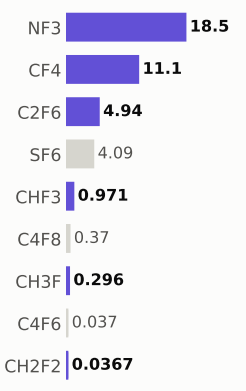

Step #16550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,735.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

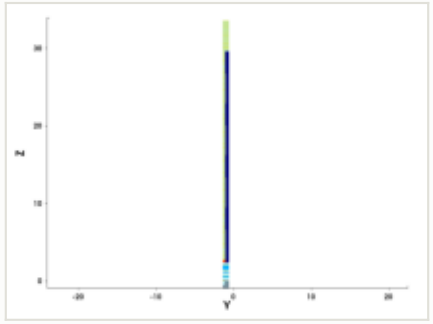

y cut at -1.035 µm

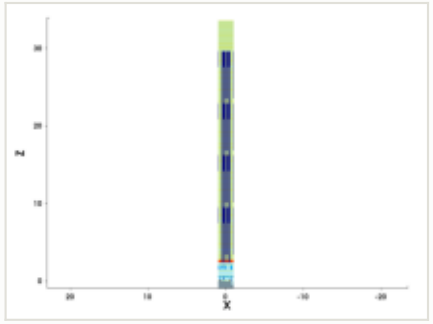

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

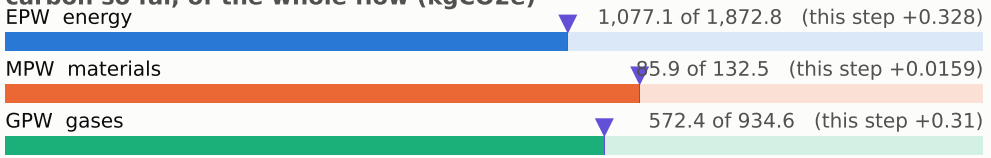

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

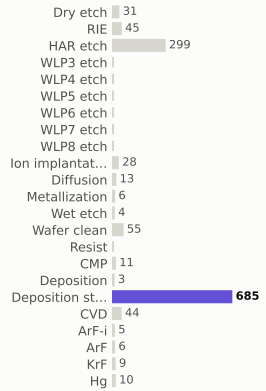

materials deposited (g)

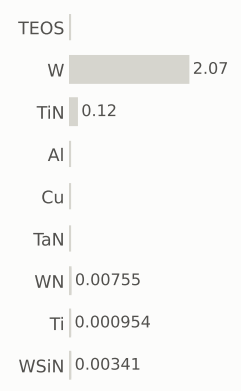

gases emitted (g)

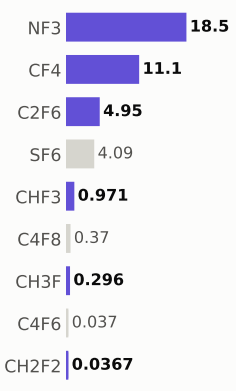

Step #16560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,736.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

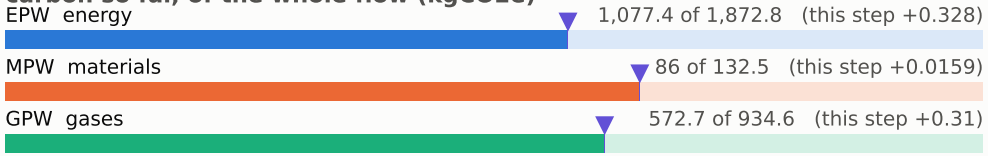

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

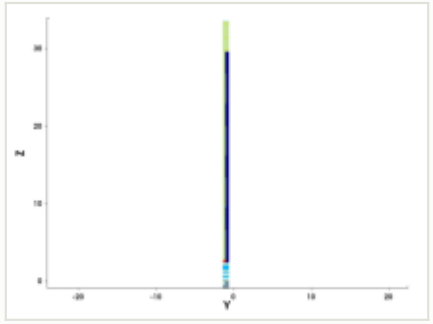

y cut at -1.035 µm

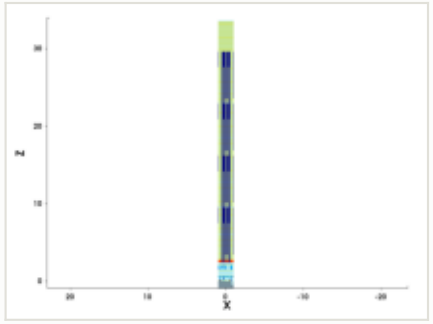

mask for this step

no mask for this step

steps by process area

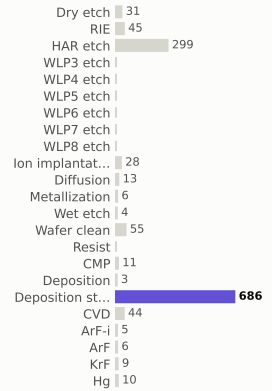

materials deposited (g)

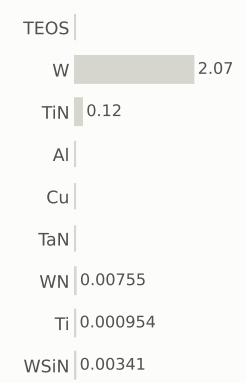

gases emitted (g)

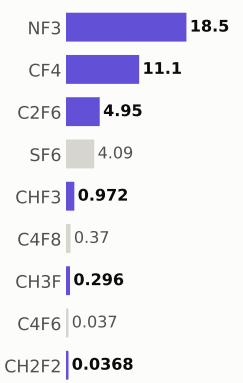

Step #16570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,736.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

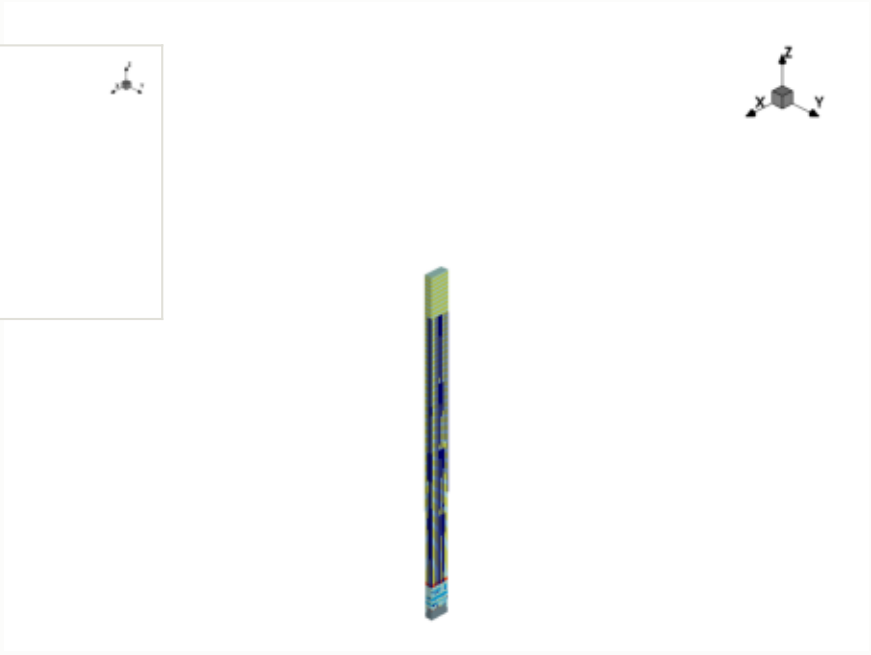

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

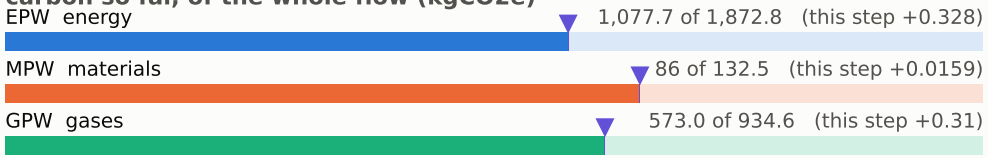

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

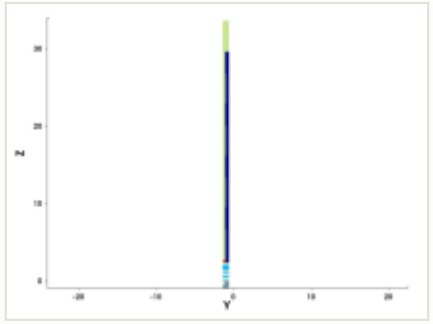

y cut at -1.035 µm

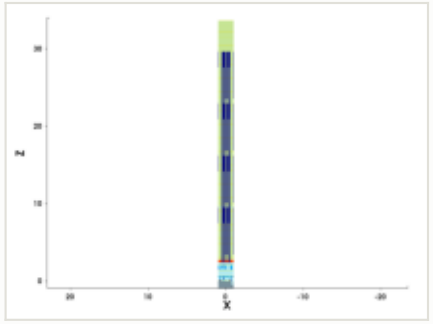

mask for this step

no mask for this step

steps by process area

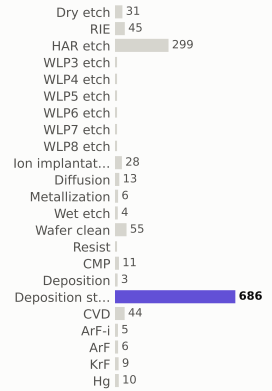

materials deposited (g)

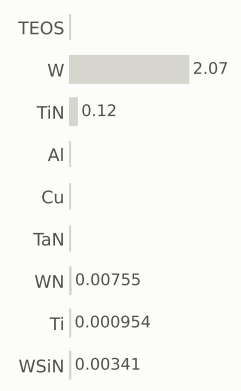

gases emitted (g)

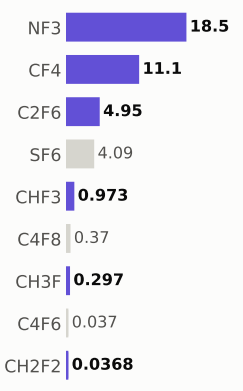

Step #16580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,737.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

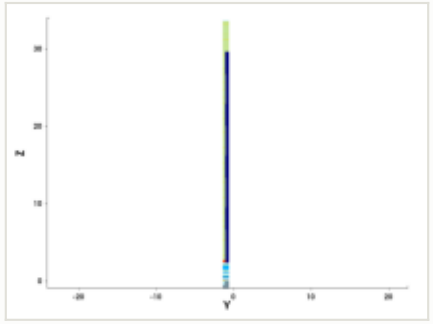

y cut at -1.035 µm

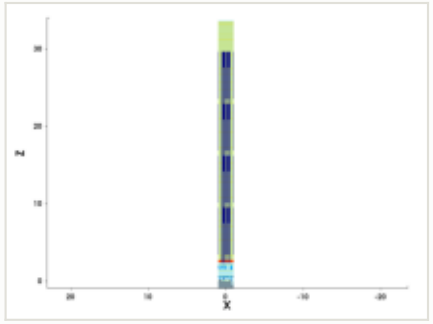

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

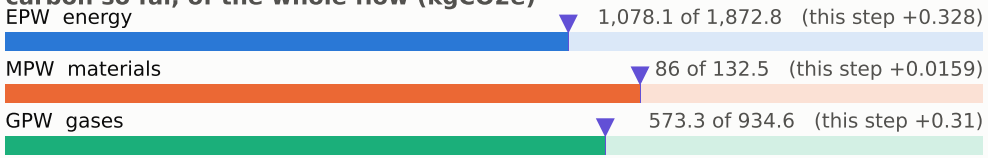

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

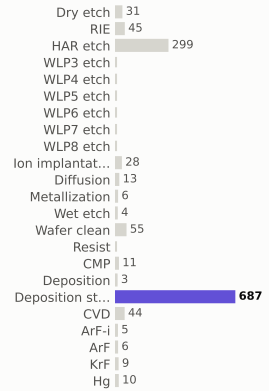

materials deposited (g)

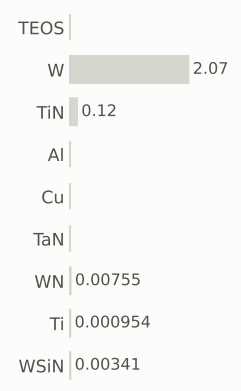

gases emitted (g)

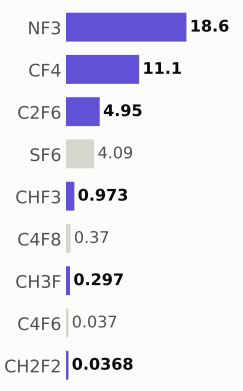

Step #16590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,738.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

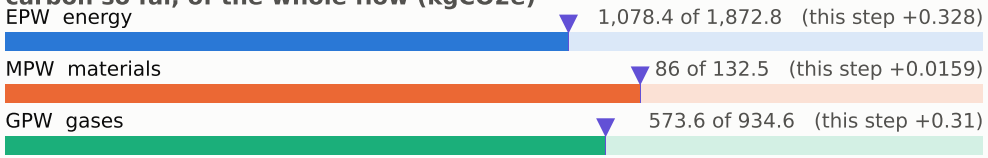

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

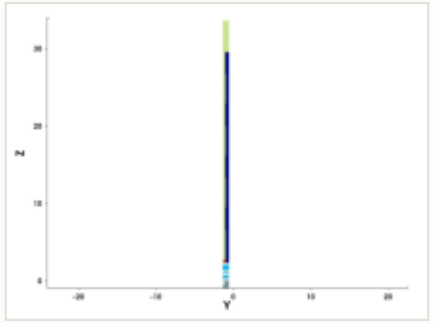

y cut at -1.035 µm

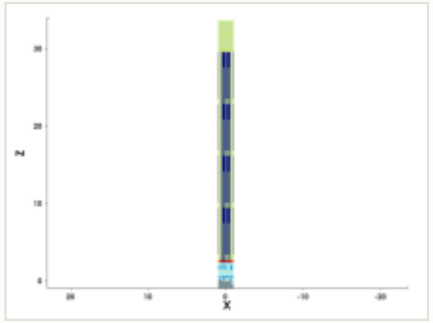

mask for this step

no mask for this step

steps by process area

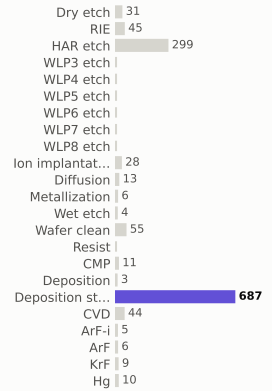

materials deposited (g)

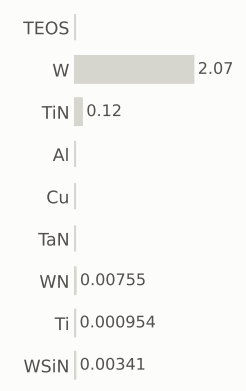

gases emitted (g)

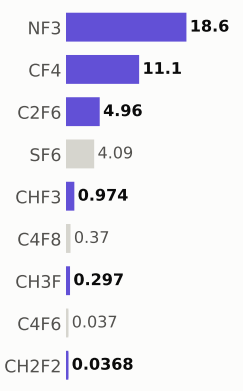

Step #16600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,738.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

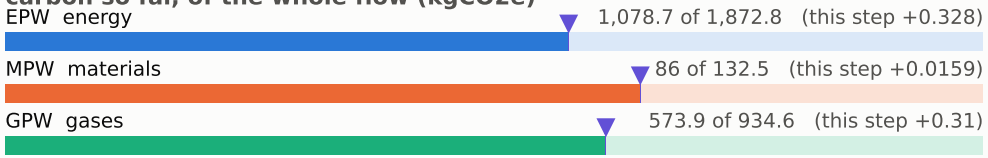

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

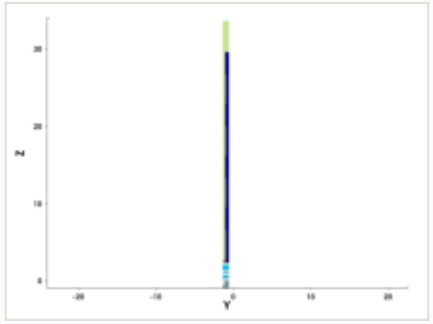

y cut at -1.035 µm

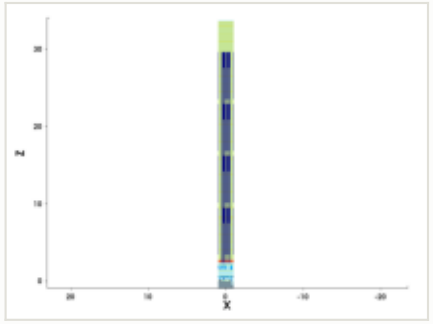

mask for this step

no mask for this step

steps by process area

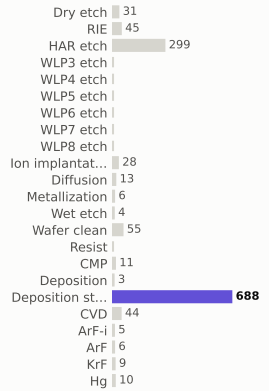

materials deposited (g)

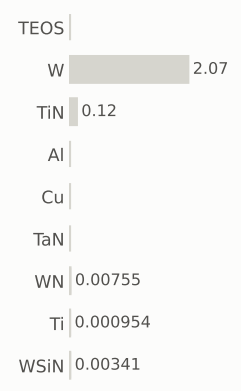

gases emitted (g)

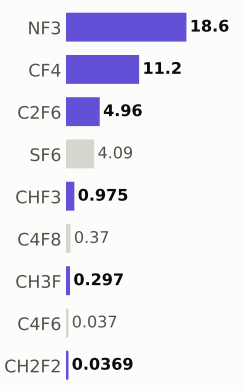

Step #16610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,739.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

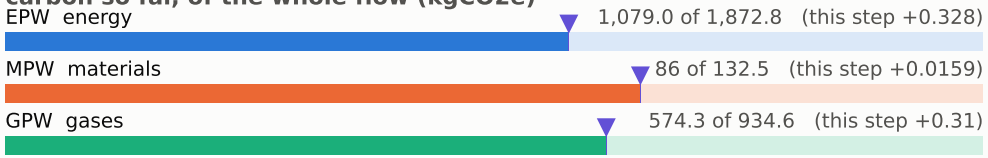

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

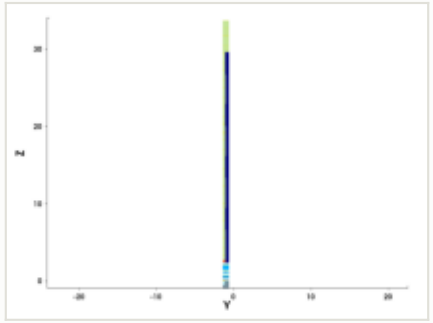

y cut at -1.035 µm

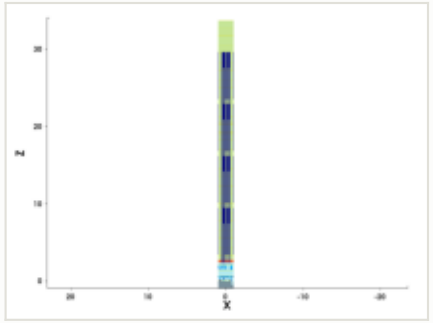

mask for this step

no mask for this step

steps by process area

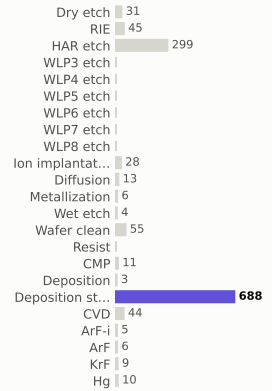

materials deposited (g)

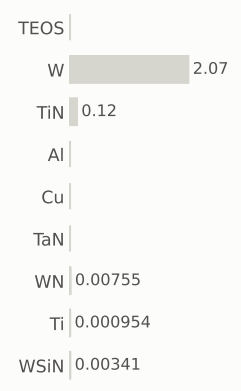

gases emitted (g)

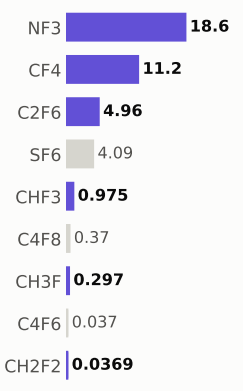

Step #16620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,740.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

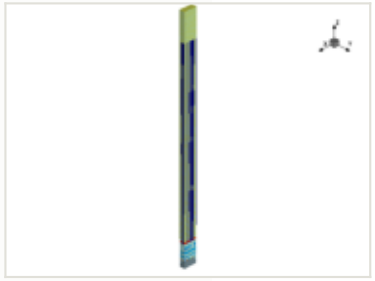

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

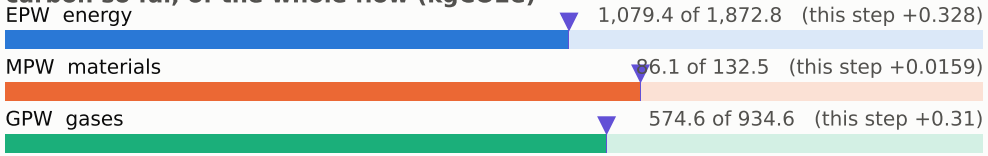

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

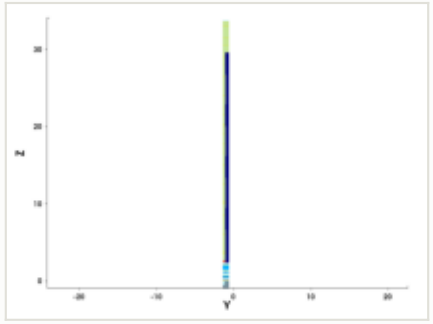

y cut at -1.035 µm

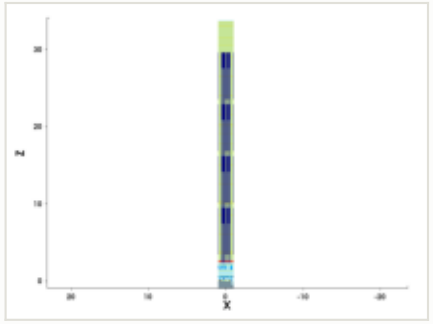

mask for this step

no mask for this step

steps by process area

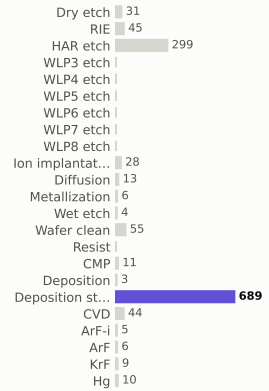

materials deposited (g)

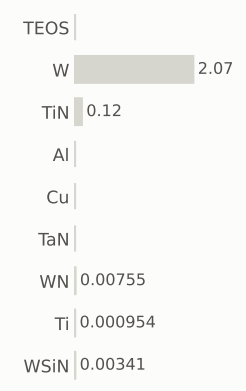

gases emitted (g)

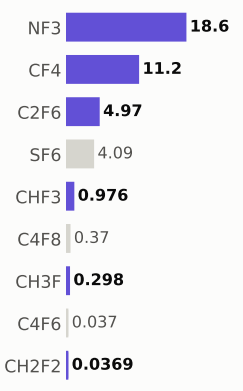

Step #16630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,740.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

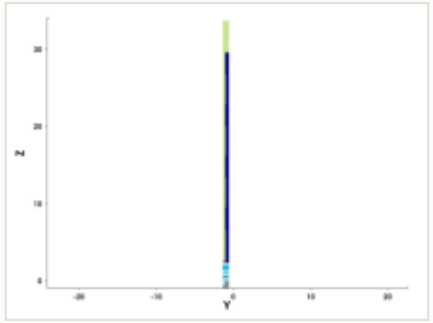

y cut at -1.035 µm

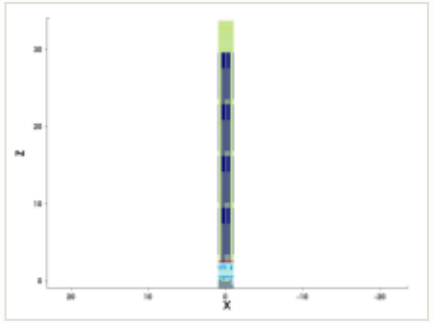

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

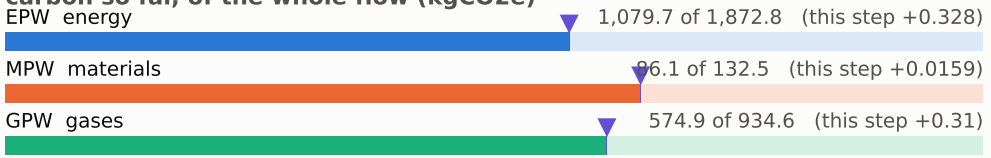

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

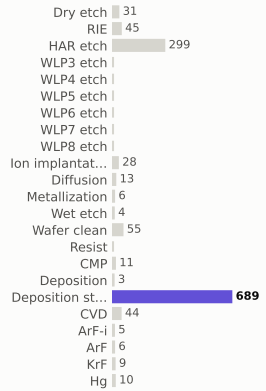

materials deposited (g)

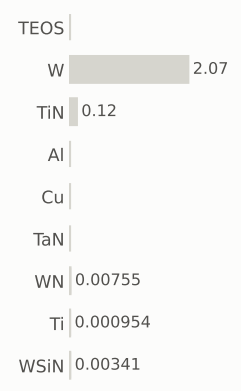

gases emitted (g)

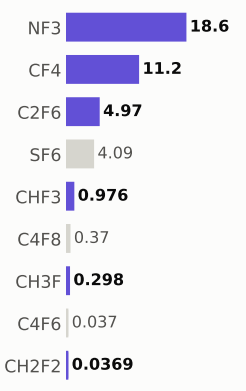

Step #16640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,741.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

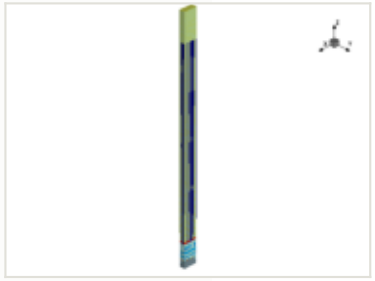

x cut at 0.000 µm

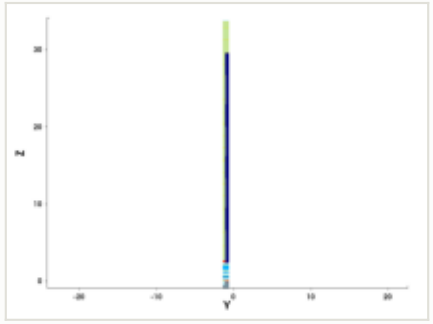

y cut at -1.035 µm

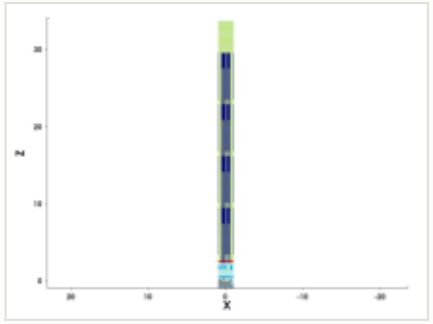

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

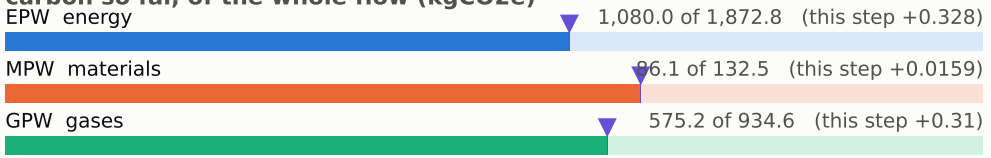

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

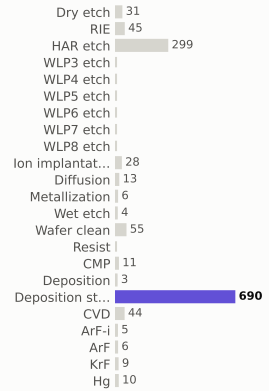

materials deposited (g)

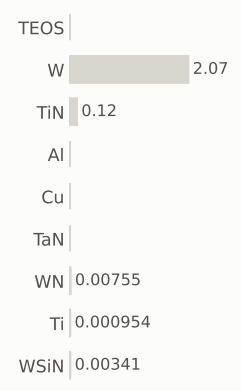

gases emitted (g)

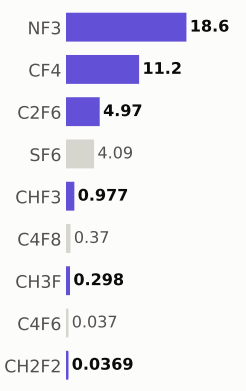

Step #16650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,742.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

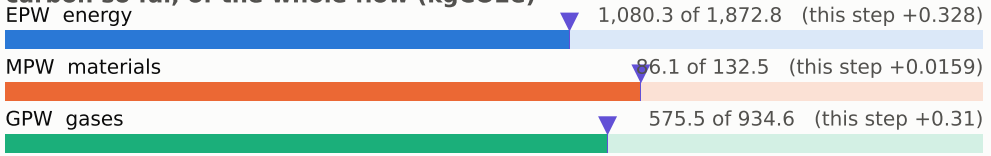

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

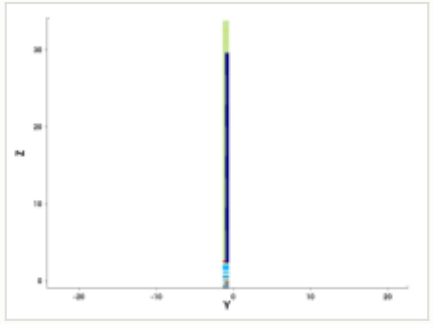

y cut at -1.035 µm

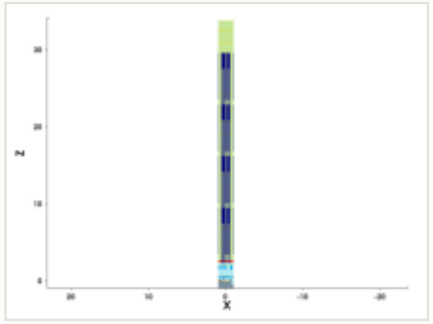

mask for this step

no mask for this step

steps by process area

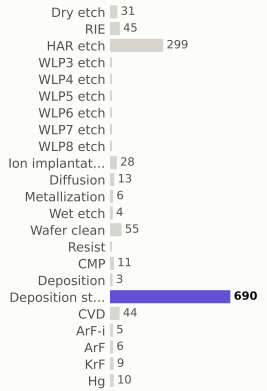

materials deposited (g)

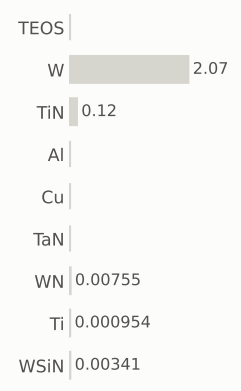

gases emitted (g)

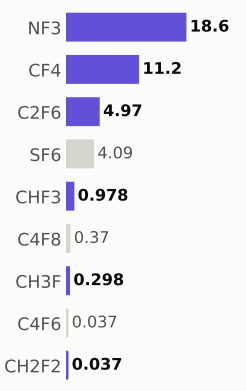

Step #16660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,742.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

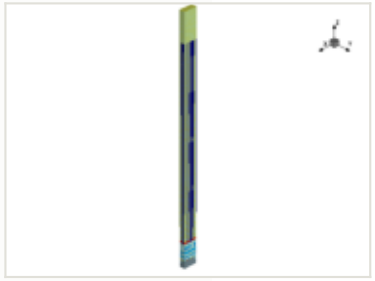

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

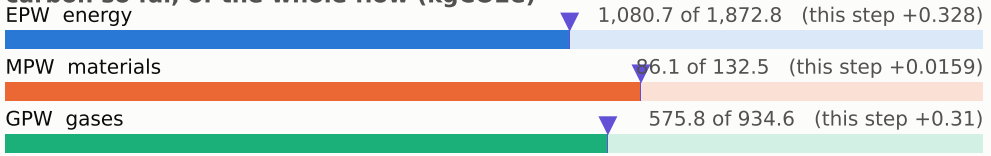

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

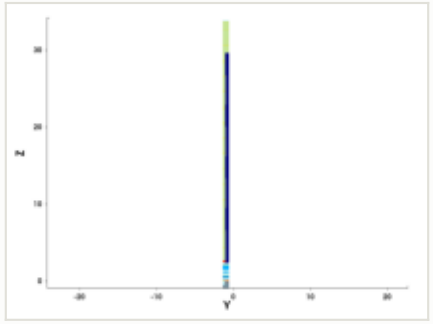

y cut at -1.035 µm

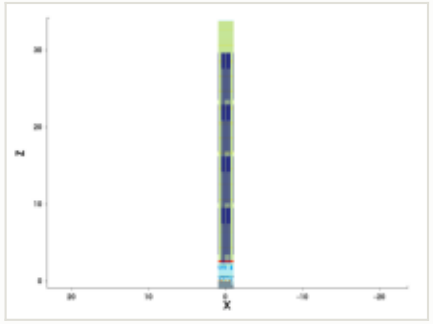

mask for this step

no mask for this step

steps by process area

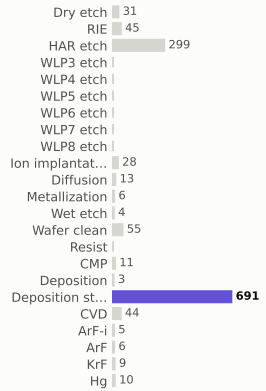

materials deposited (g)

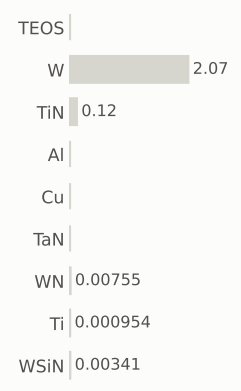

gases emitted (g)

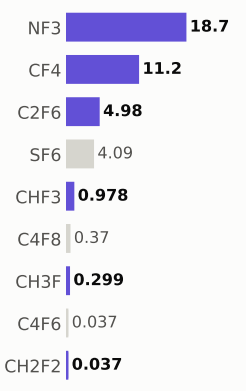

Step #16670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,743.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

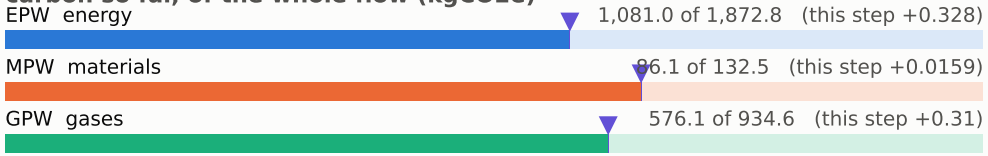

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

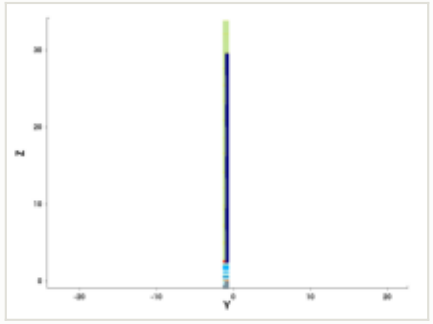

y cut at -1.035 µm

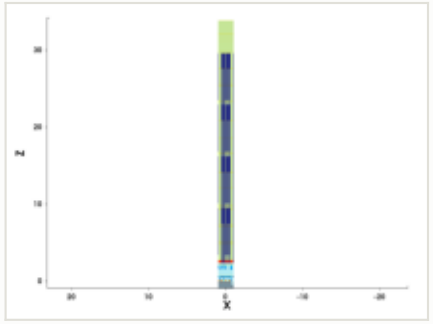

mask for this step

no mask for this step

steps by process area

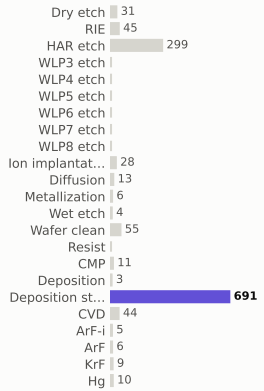

materials deposited (g)

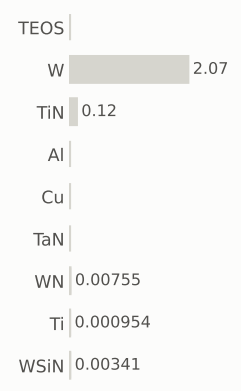

gases emitted (g)

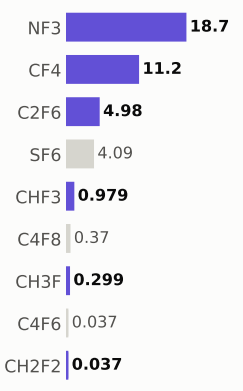

Step #16680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,743.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

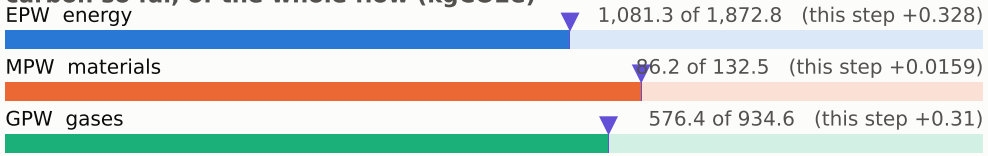

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

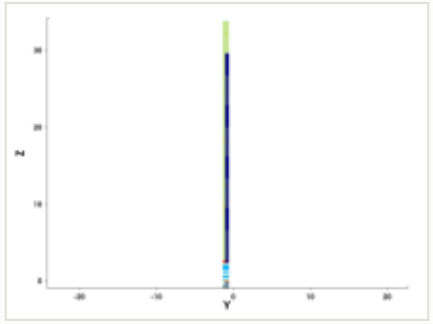

y cut at -1.035 µm

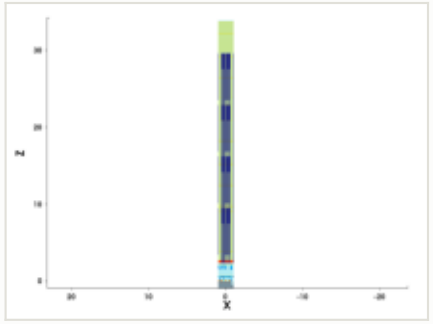

mask for this step

no mask for this step

steps by process area

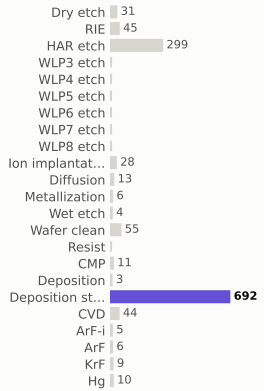

materials deposited (g)

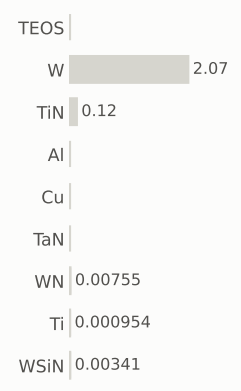

gases emitted (g)

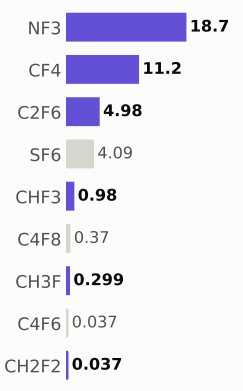

Step #16690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,744.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

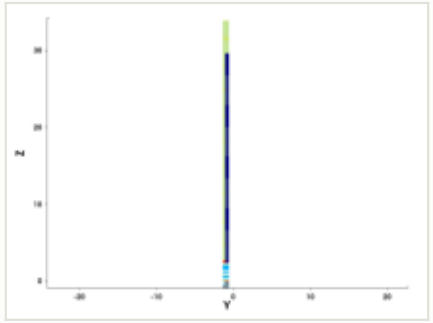

y cut at -1.035 µm

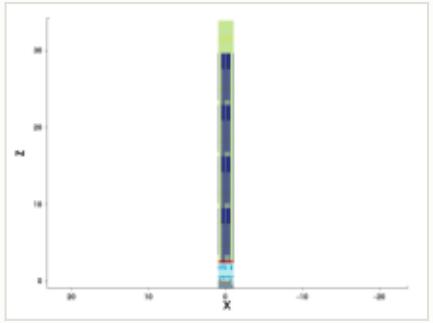

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

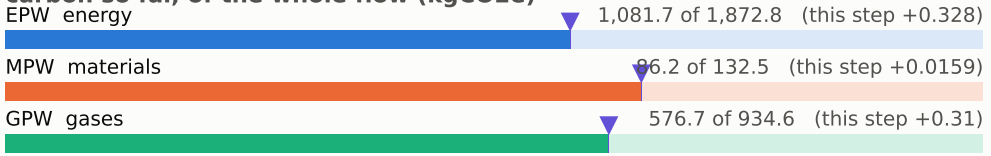

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

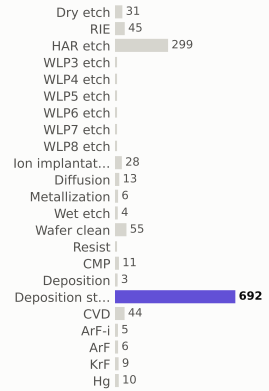

materials deposited (g)

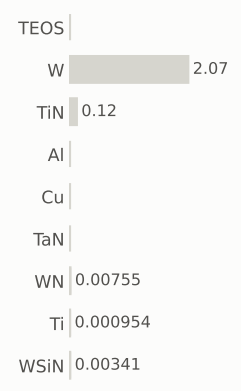

gases emitted (g)

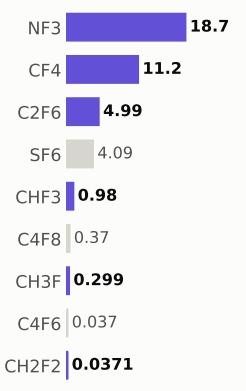

Step #16700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,745.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

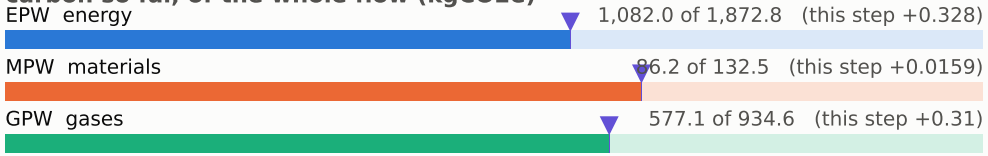

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

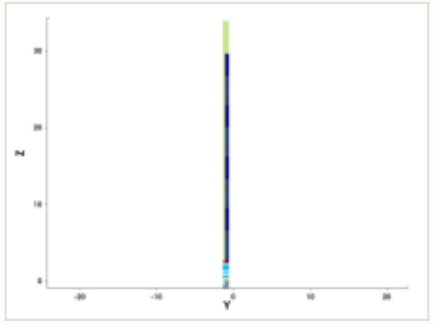

y cut at -1.035 µm

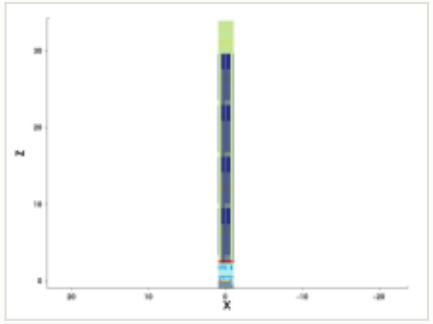

mask for this step

no mask for this step

steps by process area

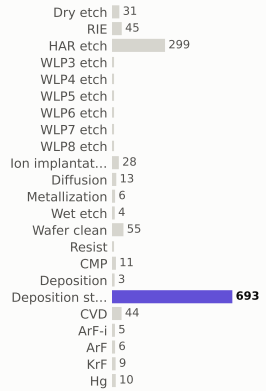

materials deposited (g)

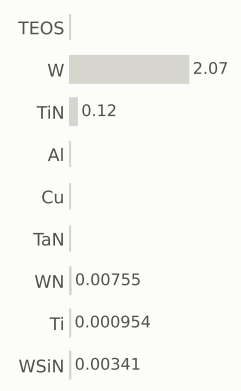

gases emitted (g)

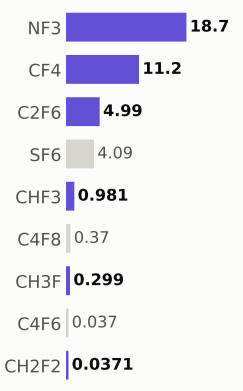

Step #16710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,745.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

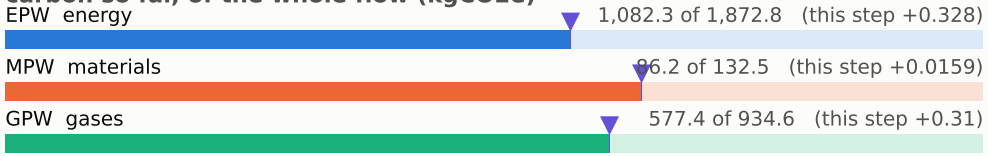

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

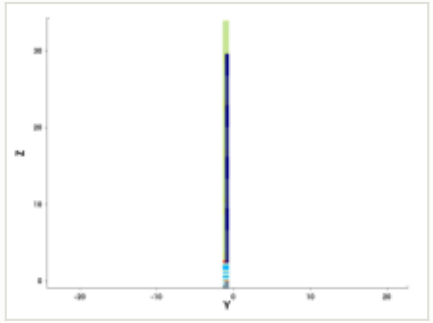

y cut at -1.035 µm

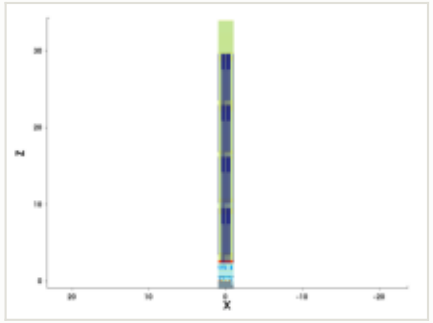

mask for this step

no mask for this step

steps by process area

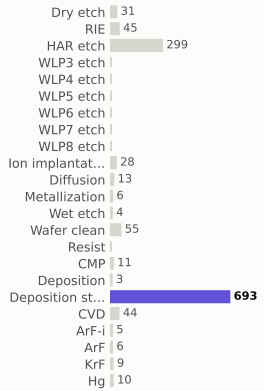

materials deposited (g)

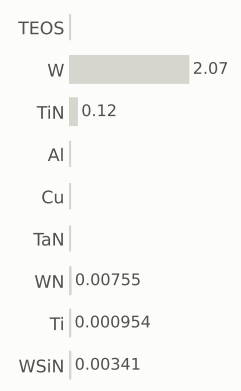

gases emitted (g)

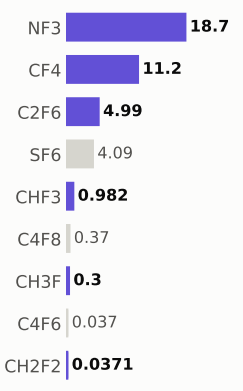

Step #16720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,746.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

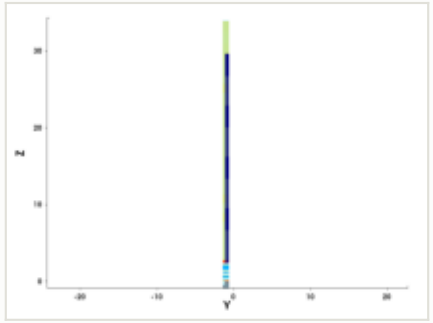

y cut at -1.035 µm

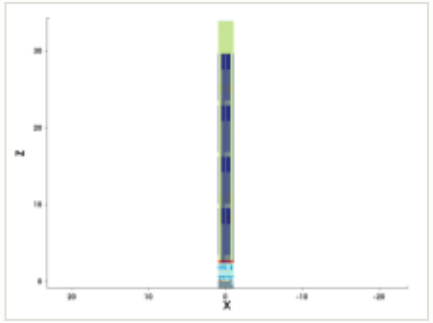

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

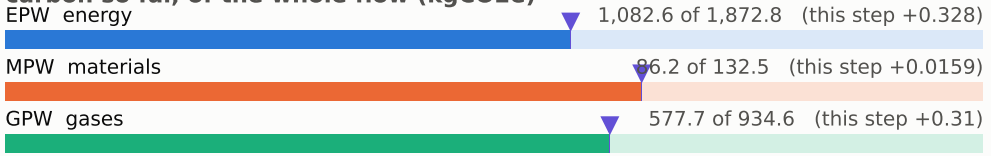

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

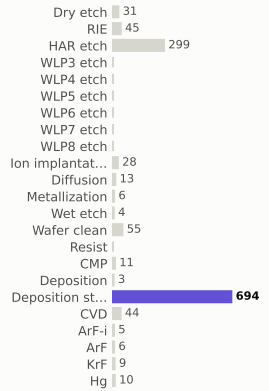

materials deposited (g)

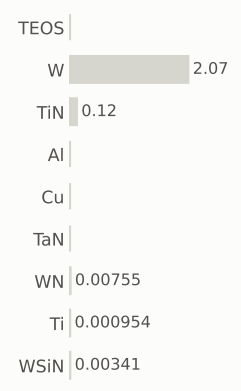

gases emitted (g)

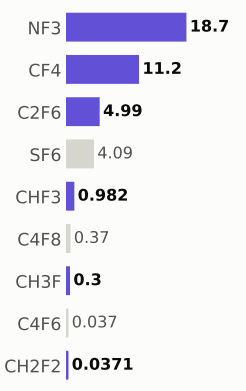

Step #16730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,747.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

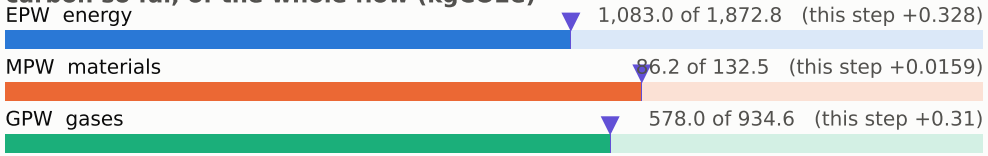

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

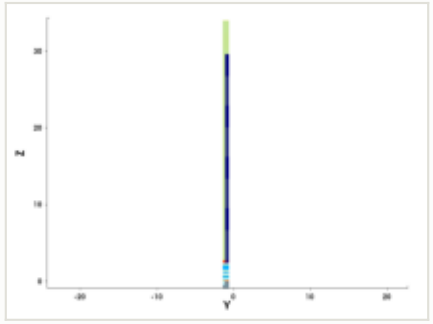

y cut at -1.035 µm

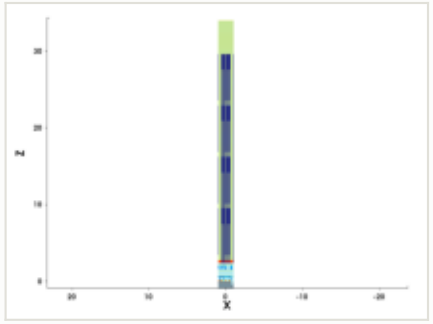

mask for this step

no mask for this step

steps by process area

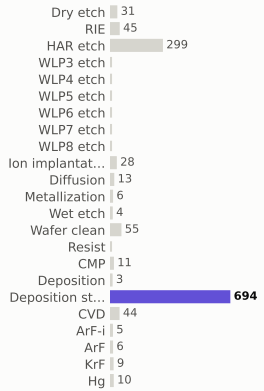

materials deposited (g)

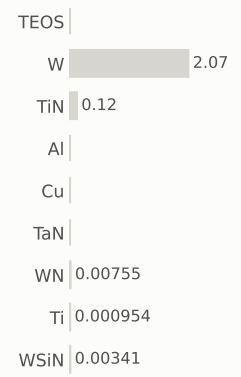

gases emitted (g)

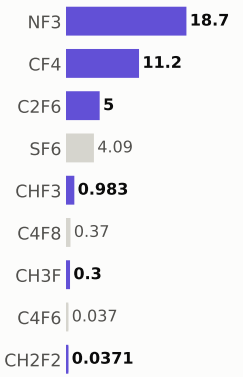

Step #16740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,747.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

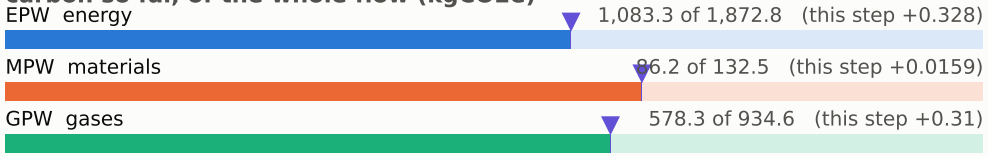

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

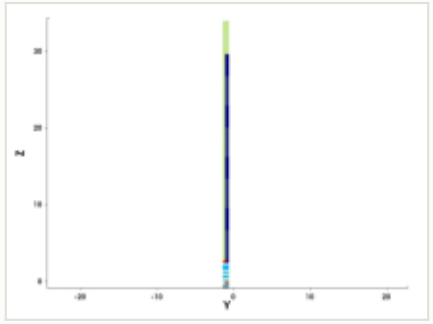

y cut at -1.035 µm

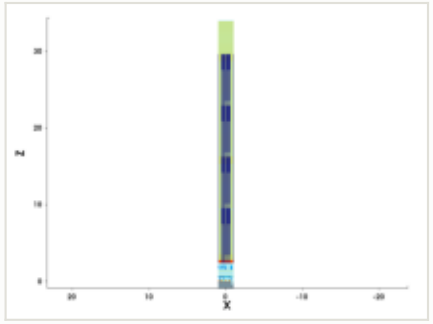

mask for this step

no mask for this step

steps by process area

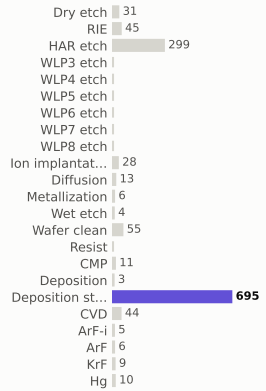

materials deposited (g)

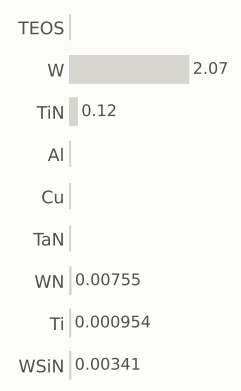

gases emitted (g)

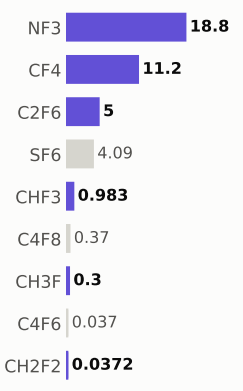

Step #16750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,748.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

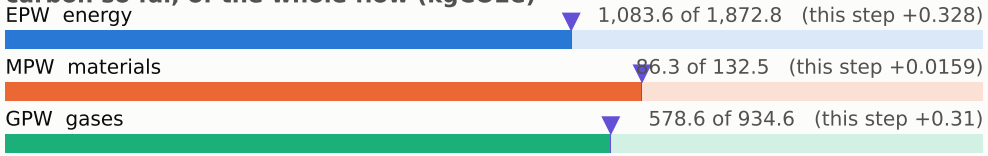

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

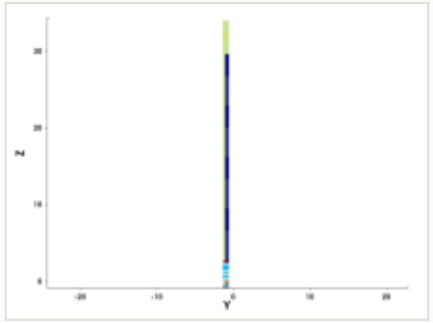

y cut at -1.035 µm

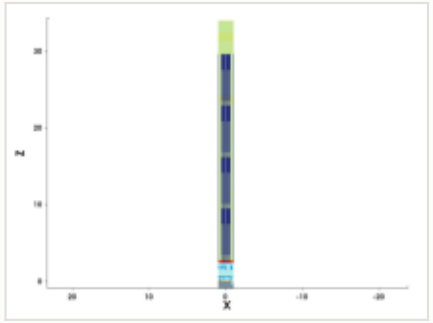

mask for this step

no mask for this step

steps by process area

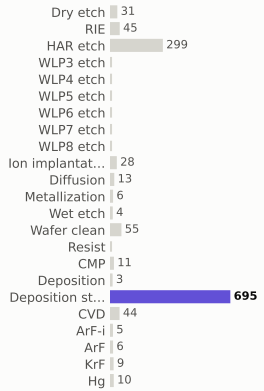

materials deposited (g)

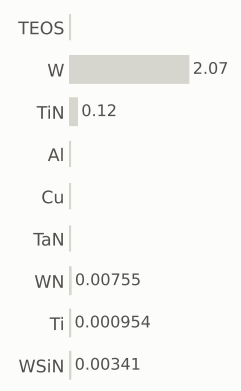

gases emitted (g)

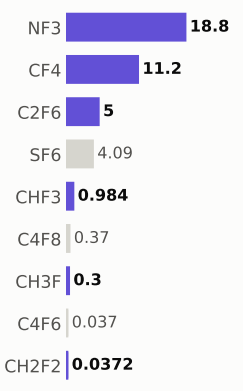

Step #16760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,749.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

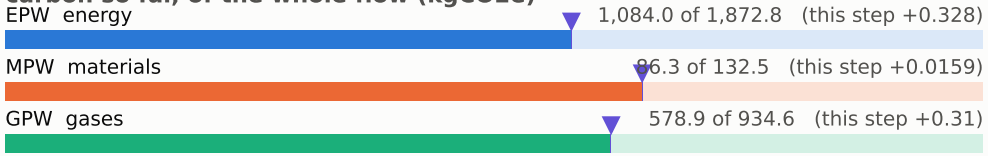

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

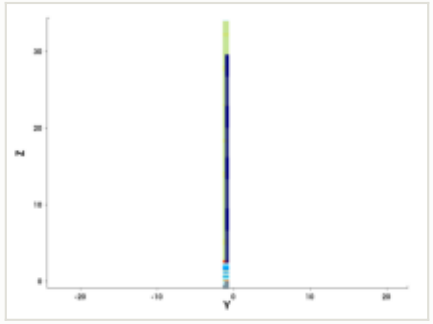

y cut at -1.035 µm

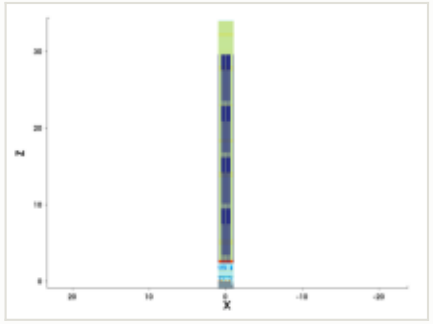

mask for this step

no mask for this step

steps by process area

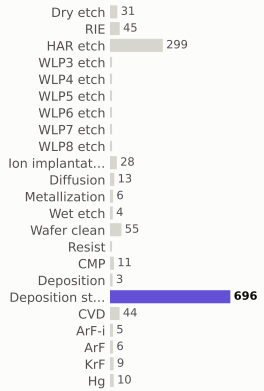

materials deposited (g)

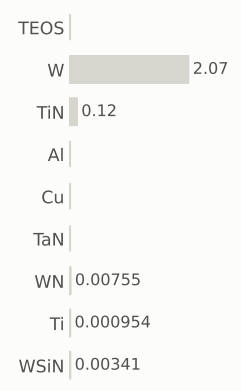

gases emitted (g)

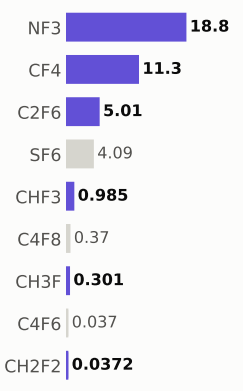

Step #16770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,749.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

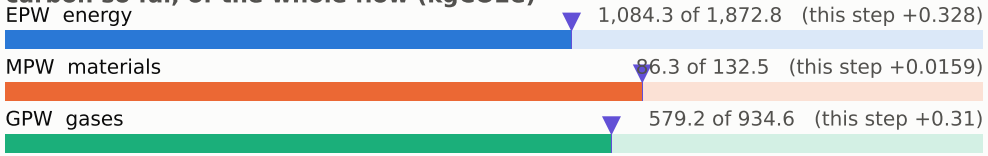

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

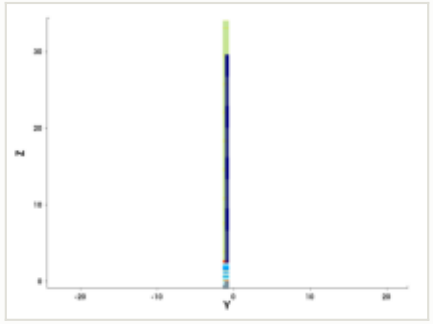

y cut at -1.035 µm

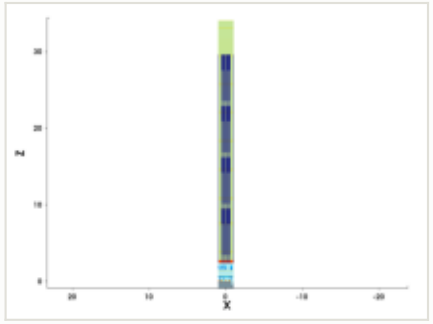

mask for this step

no mask for this step

steps by process area

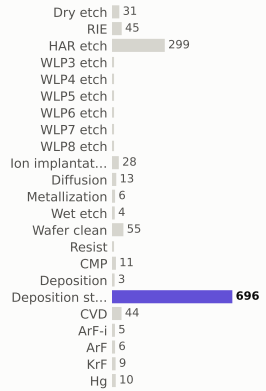

materials deposited (g)

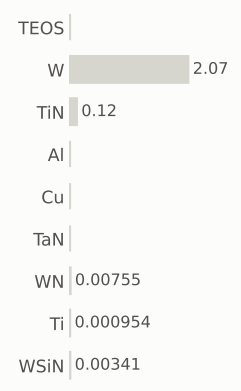

gases emitted (g)

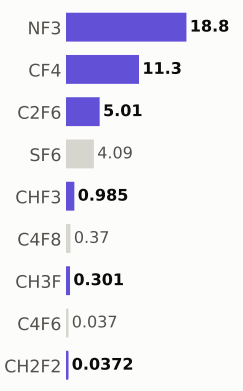

Step #16780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,750.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

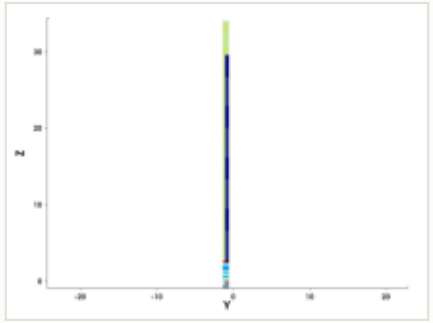

y cut at -1.035 µm

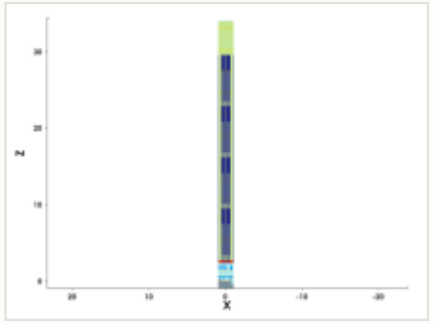

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

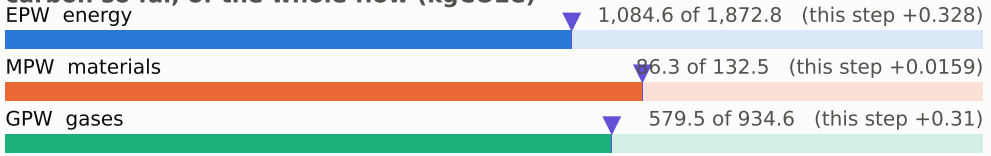

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

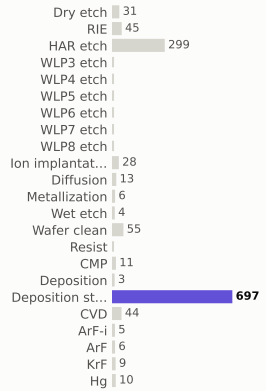

materials deposited (g)

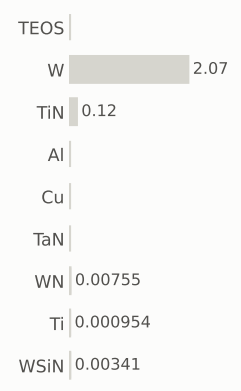

gases emitted (g)

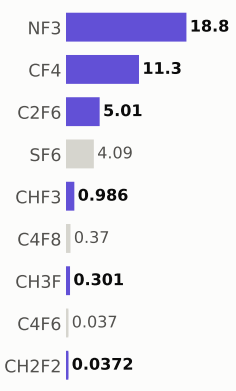

Step #16790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,751.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

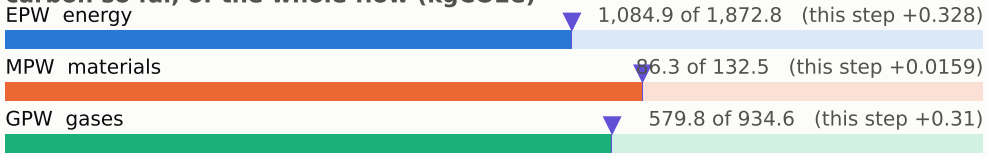

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

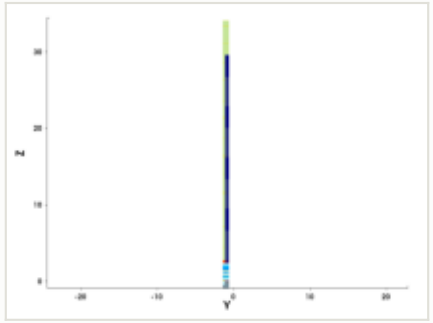

y cut at -1.035 µm

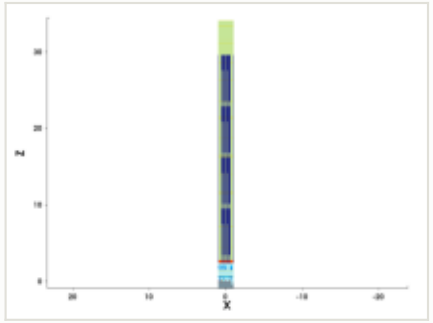

mask for this step

no mask for this step

steps by process area

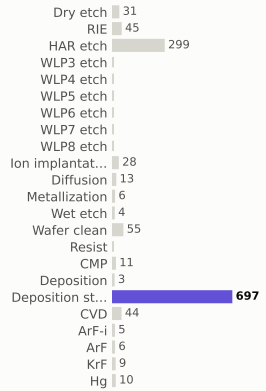

materials deposited (g)

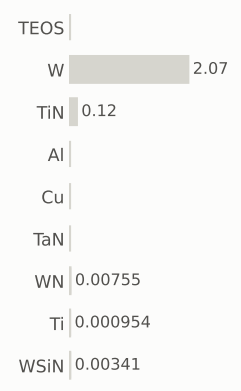

gases emitted (g)

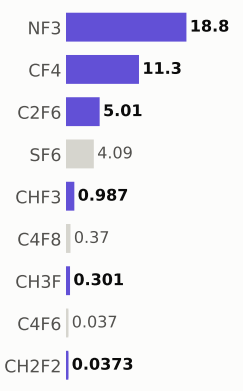

Step #16800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,751.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

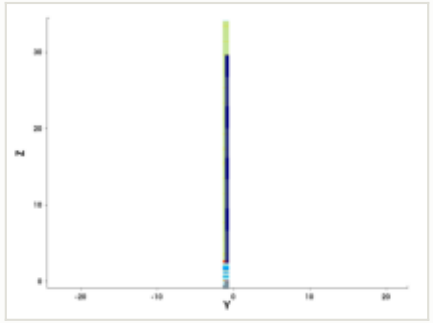

y cut at -1.035 µm

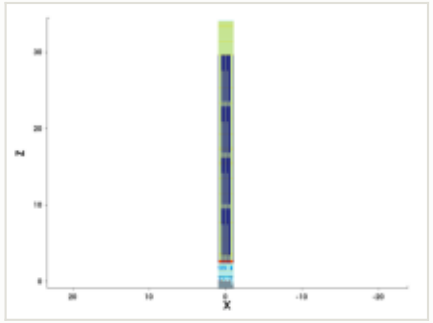

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

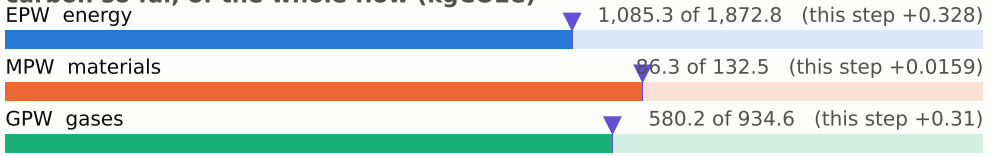

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

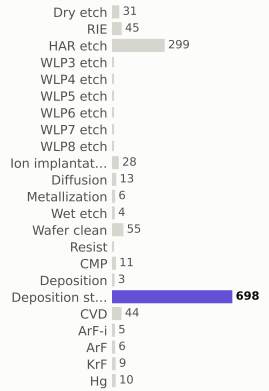

materials deposited (g)

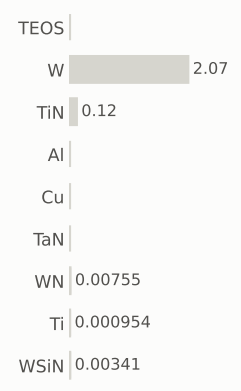

gases emitted (g)

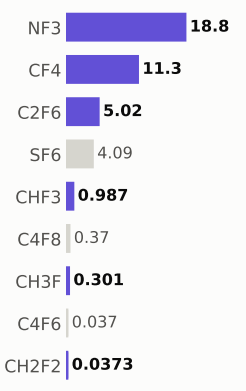

Step #16810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,752.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

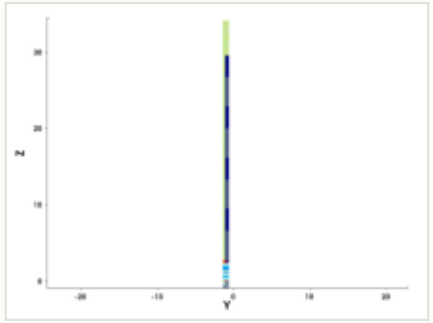

y cut at -1.035 µm

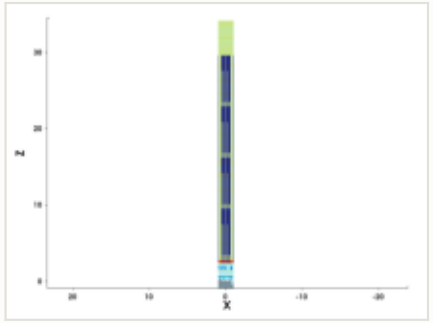

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

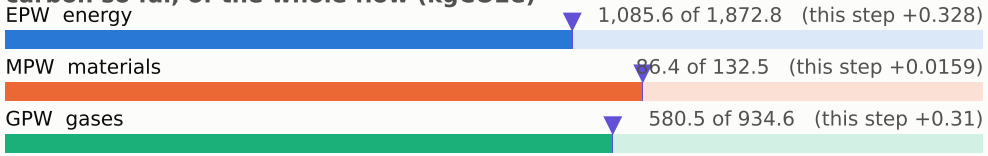

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

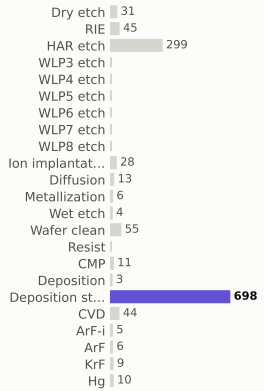

materials deposited (g)

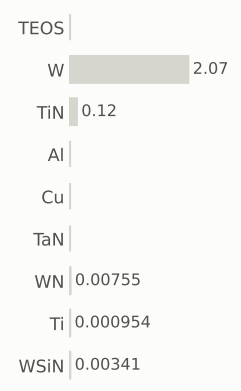

gases emitted (g)

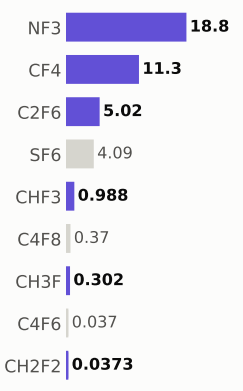

Step #16820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,753.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

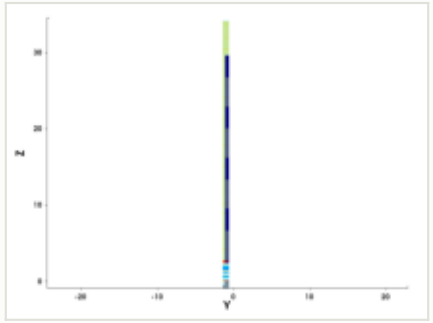

y cut at -1.035 µm

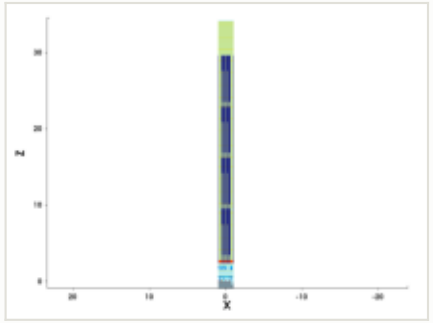

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

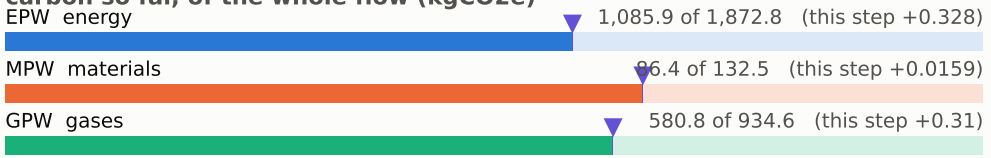

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

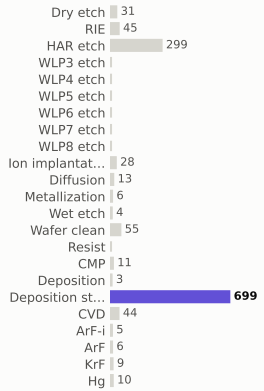

materials deposited (g)

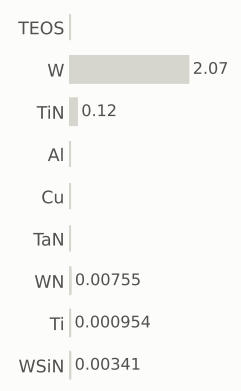

gases emitted (g)

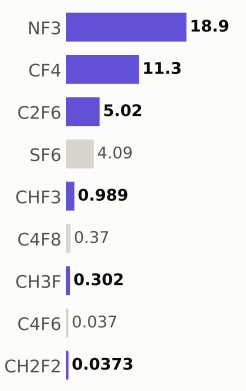

Step #16830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,753.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

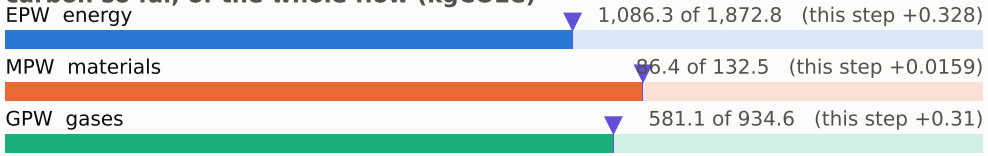

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

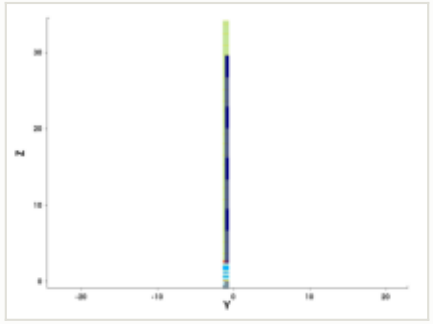

y cut at -1.035 µm

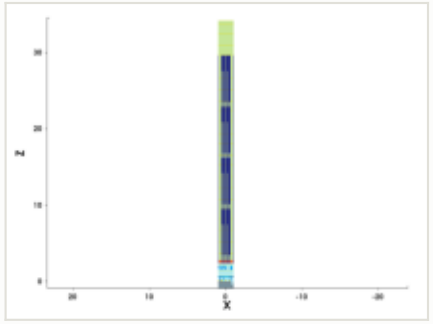

mask for this step

no mask for this step

steps by process area

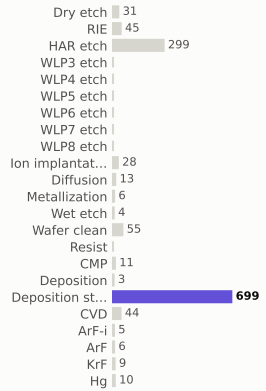

materials deposited (g)

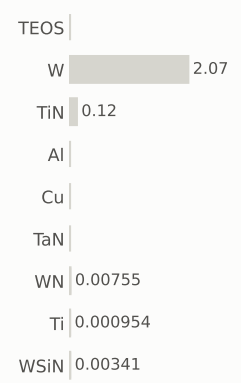

gases emitted (g)

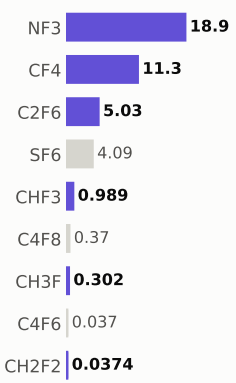

Step #16840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,754.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

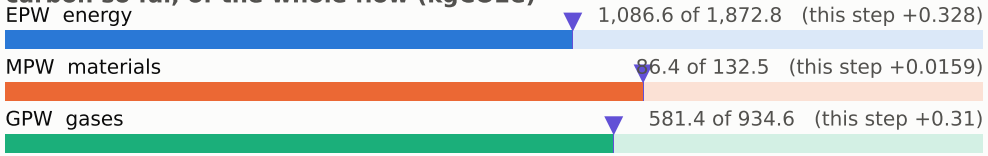

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

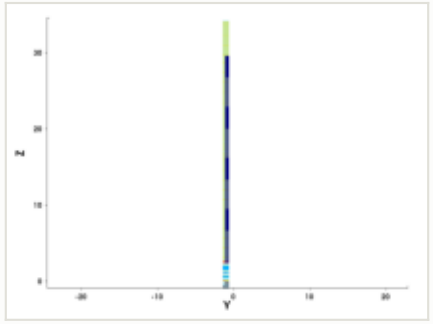

y cut at -1.035 µm

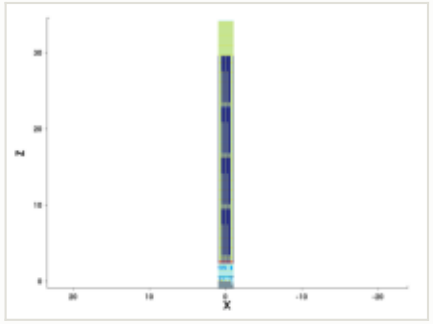

mask for this step

no mask for this step

steps by process area

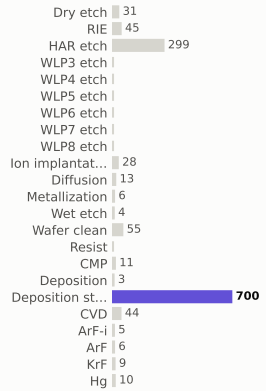

materials deposited (g)

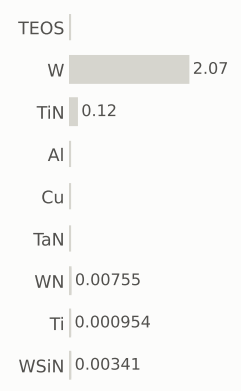

gases emitted (g)

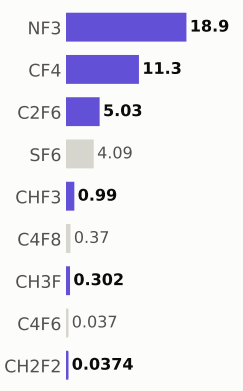

Step #16850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,755.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

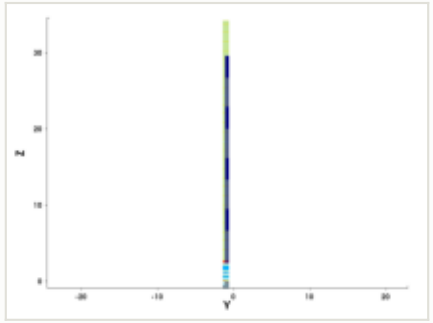

y cut at -1.035 µm

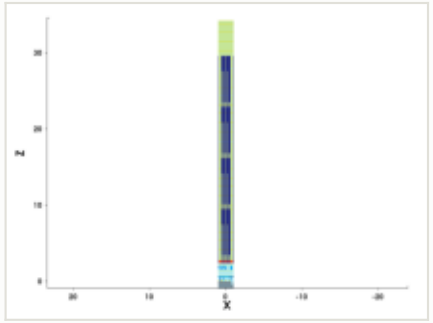

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

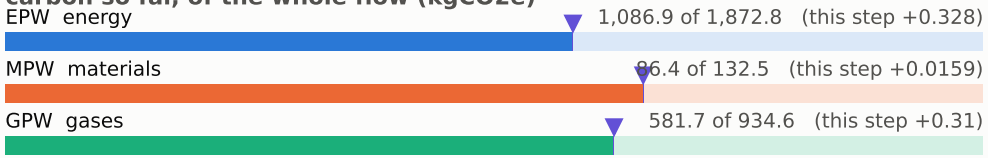

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

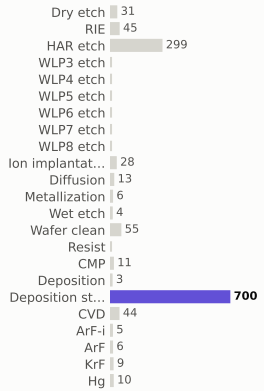

materials deposited (g)

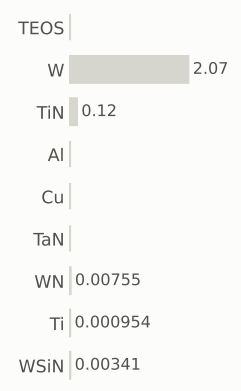

gases emitted (g)

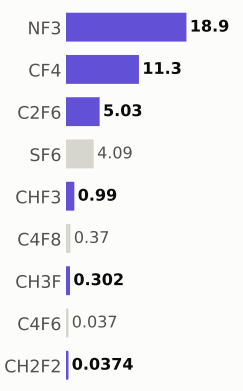

Step #16860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,755.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

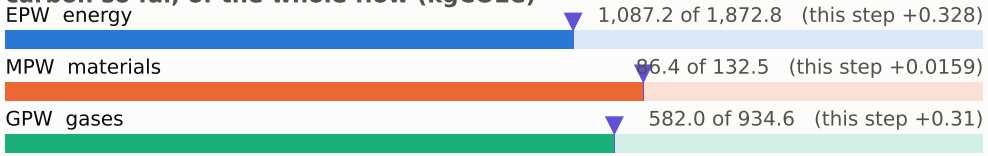

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

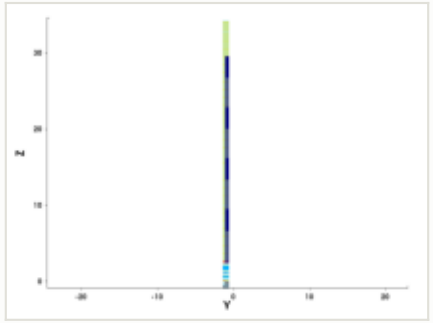

y cut at -1.035 µm

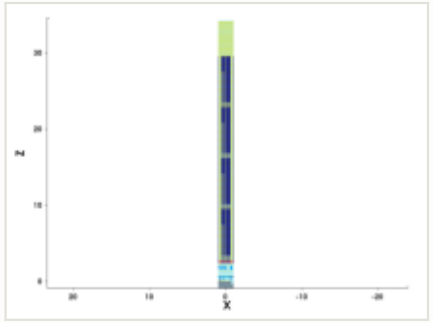

mask for this step

no mask for this step

steps by process area

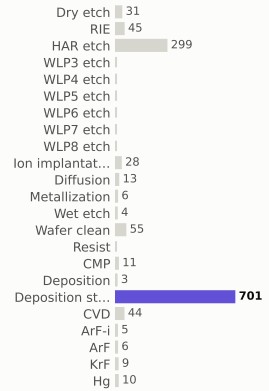

materials deposited (g)

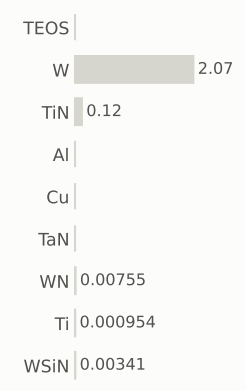

gases emitted (g)

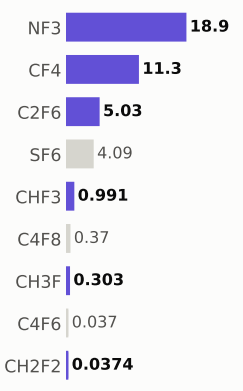

Step #16870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,756.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

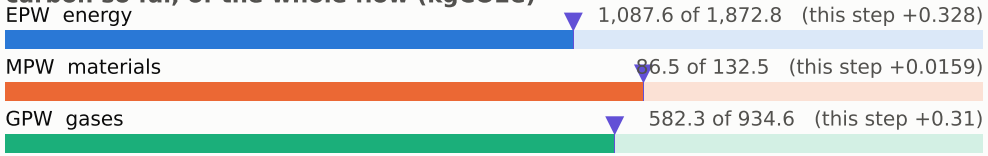

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

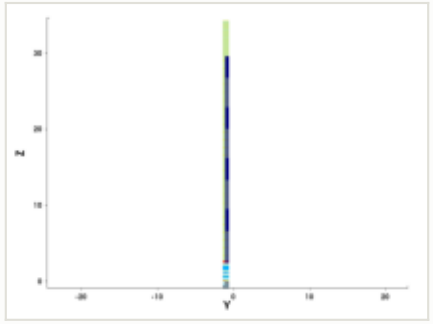

y cut at -1.035 µm

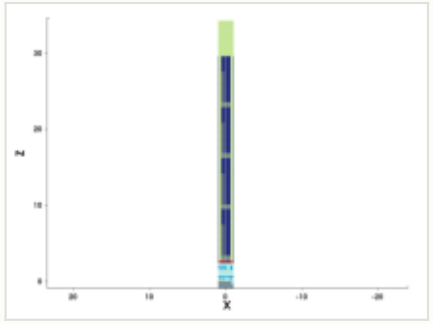

mask for this step

no mask for this step

steps by process area

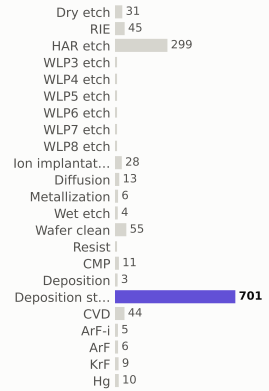

materials deposited (g)

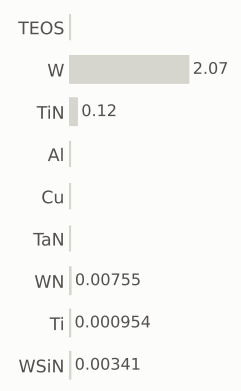

gases emitted (g)

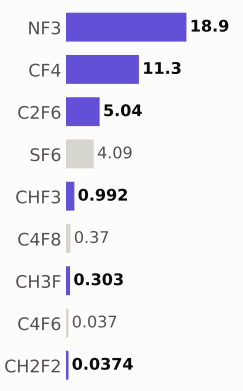

Step #16880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,757.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

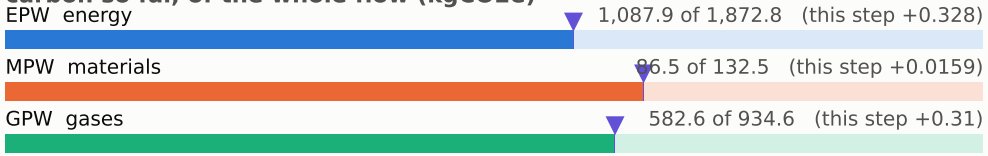

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

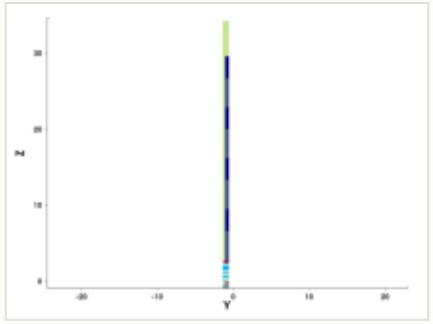

y cut at -1.035 µm

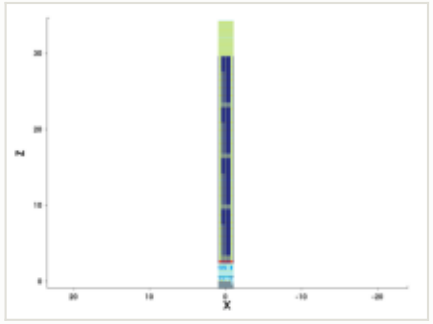

mask for this step

no mask for this step

steps by process area

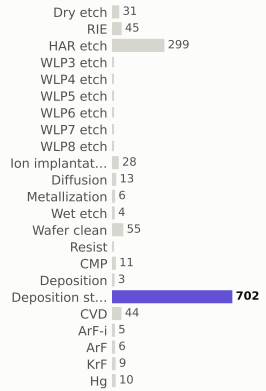

materials deposited (g)

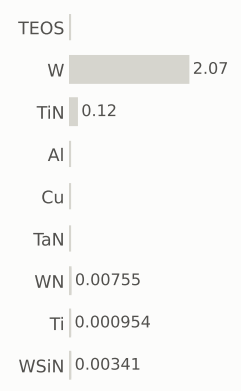

gases emitted (g)

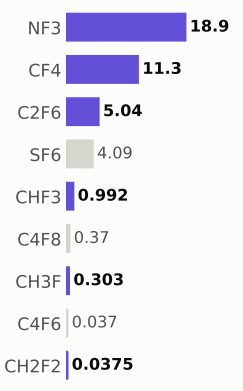

Step #16890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,757.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

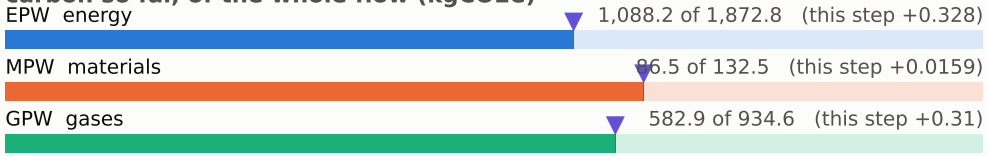

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

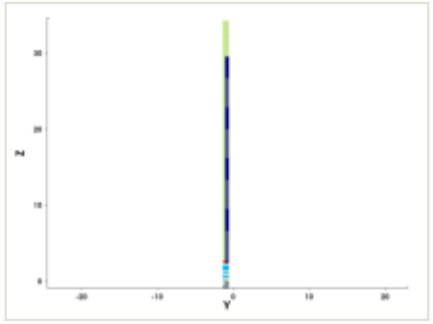

y cut at -1.035 µm

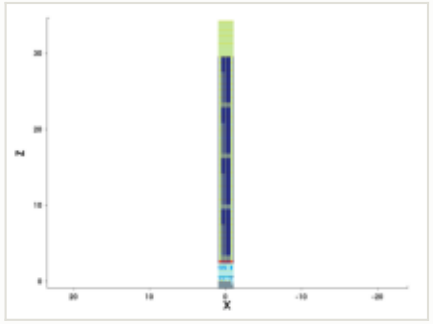

mask for this step

no mask for this step

steps by process area

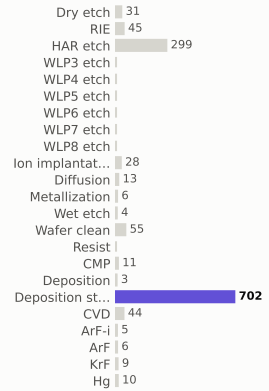

materials deposited (g)

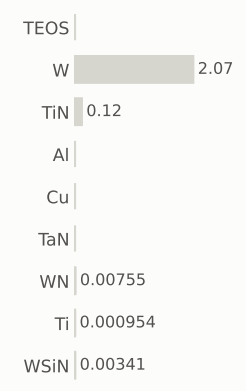

gases emitted (g)

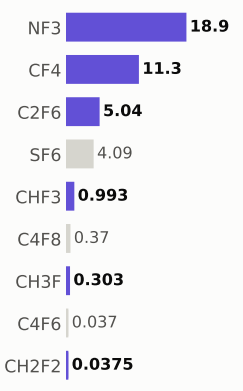

Step #16900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,758.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

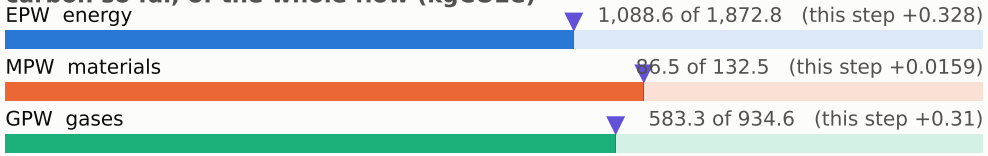

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

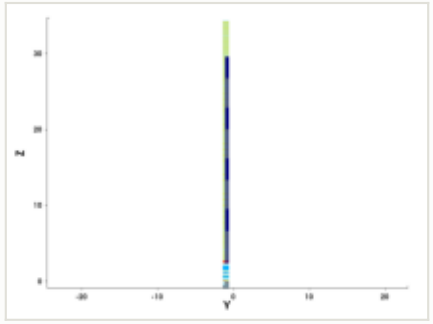

y cut at -1.035 µm

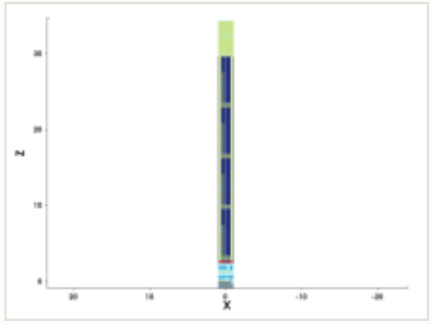

mask for this step

no mask for this step

steps by process area

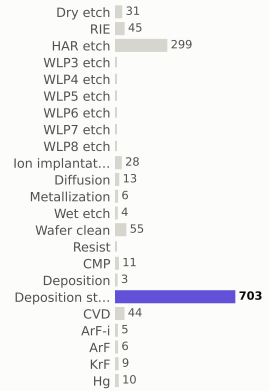

materials deposited (g)

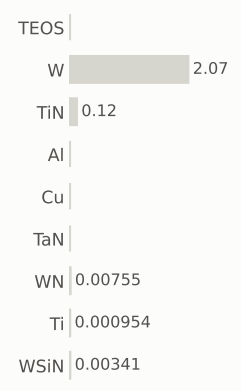

gases emitted (g)

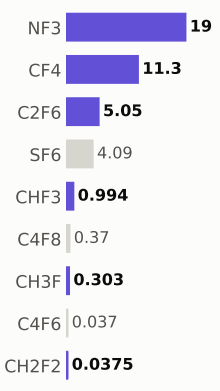

Step #16910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,759.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

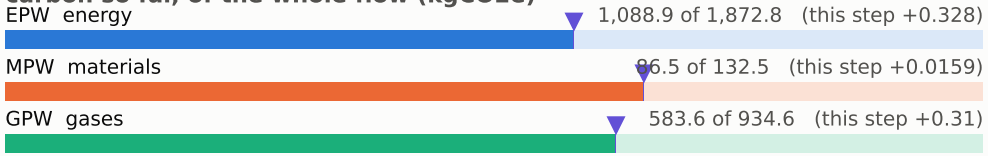

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

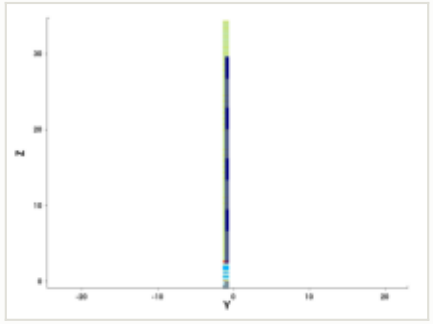

y cut at -1.035 µm

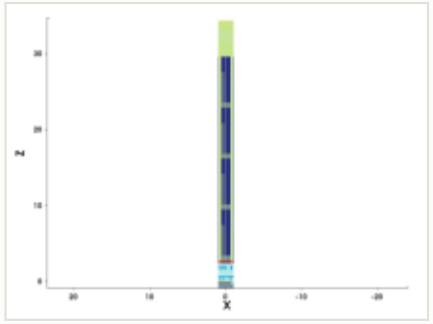

mask for this step

no mask for this step

steps by process area

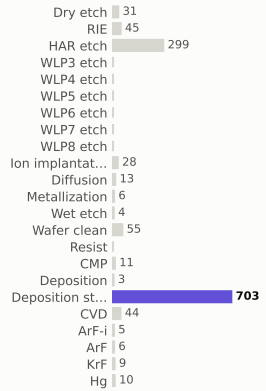

materials deposited (g)

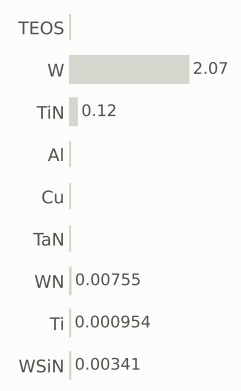

gases emitted (g)

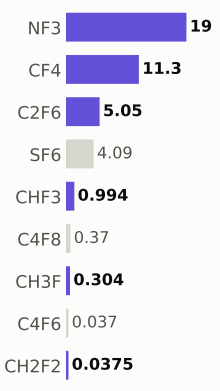

Step #16920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,759.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

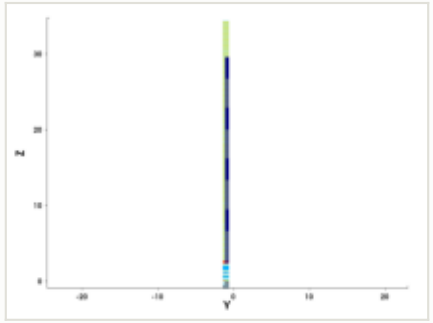

y cut at -1.035 µm

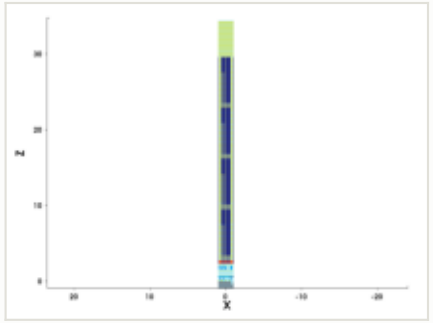

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

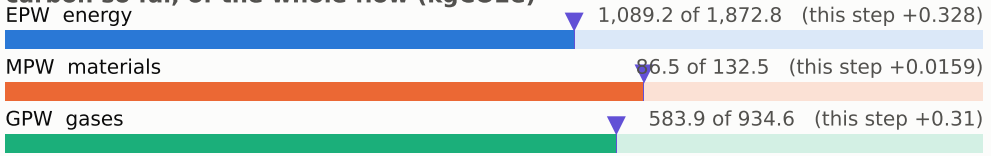

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

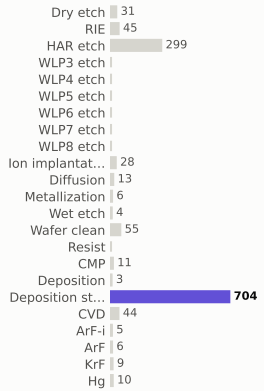

materials deposited (g)

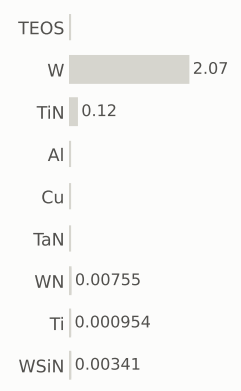

gases emitted (g)

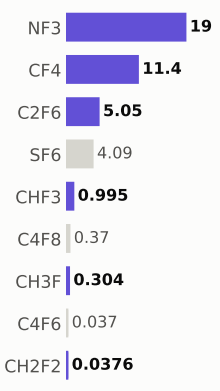

Step #16930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,760.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

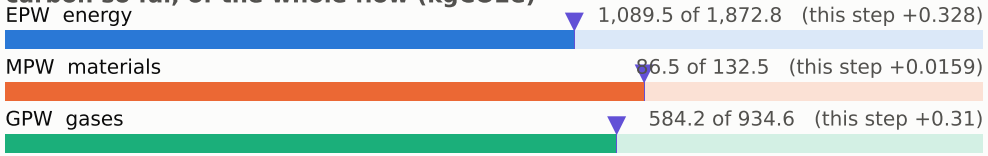

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

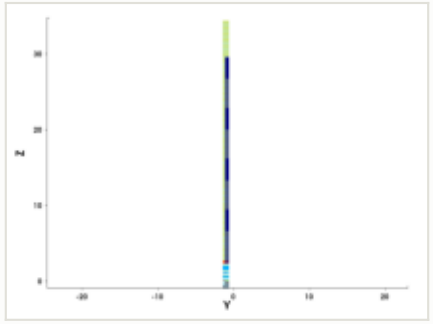

y cut at -1.035 µm

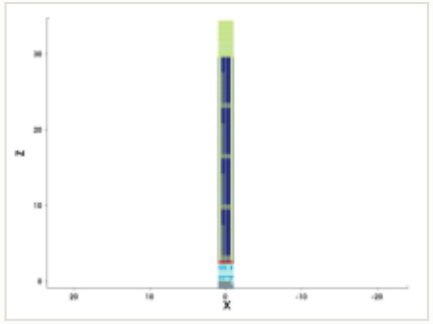

mask for this step

no mask for this step

steps by process area

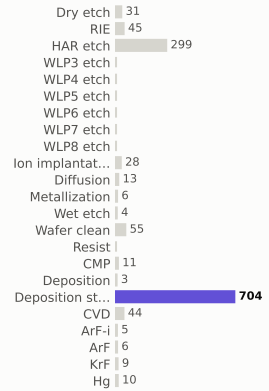

materials deposited (g)

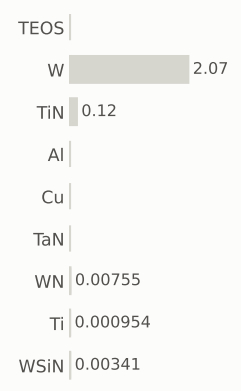

gases emitted (g)

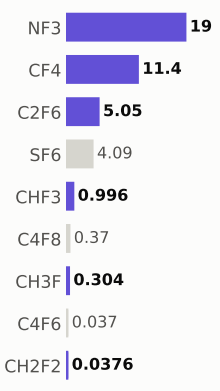

Step #16940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,760.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

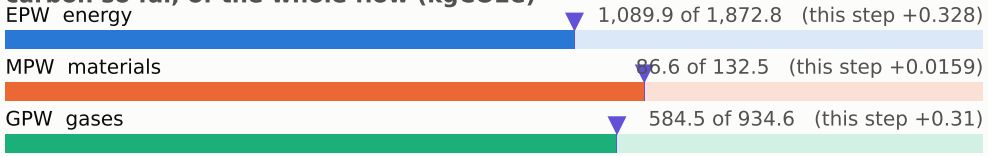

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

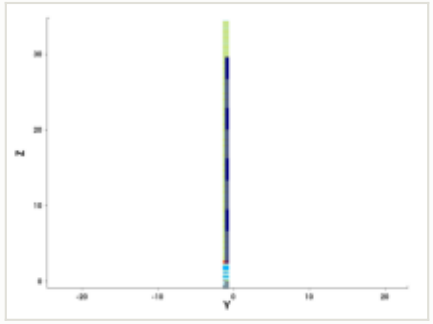

y cut at -1.035 µm

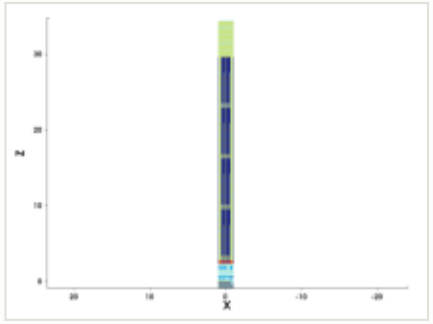

mask for this step

no mask for this step

steps by process area

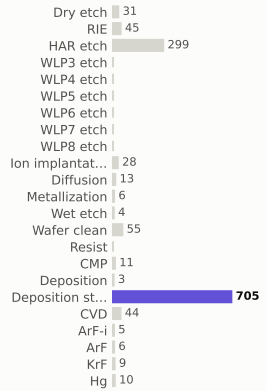

materials deposited (g)

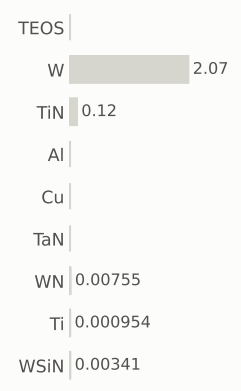

gases emitted (g)

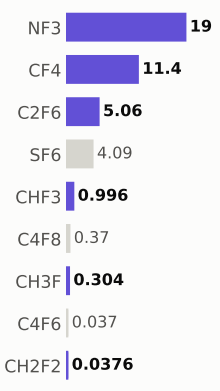

Step #16950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,761.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

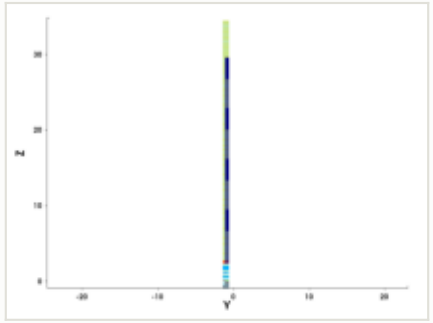

y cut at -1.035 µm

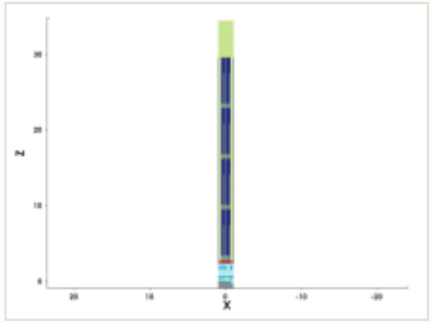

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

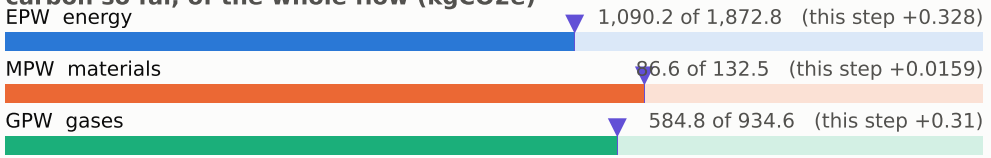

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

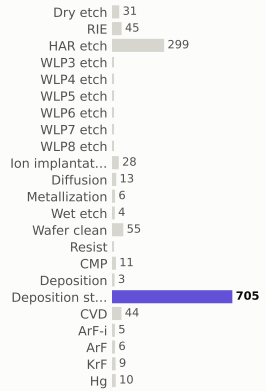

materials deposited (g)

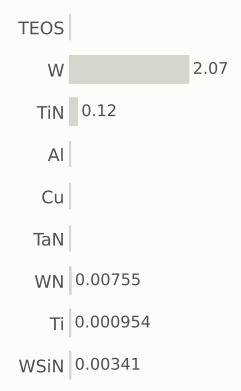

gases emitted (g)

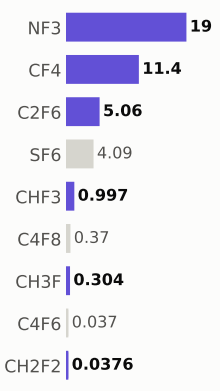

Step #16960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,762.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

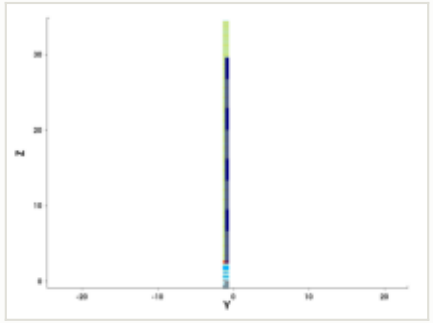

y cut at -1.035 µm

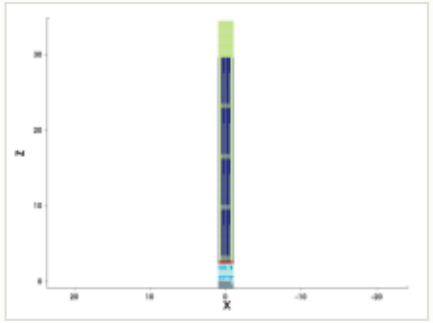

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

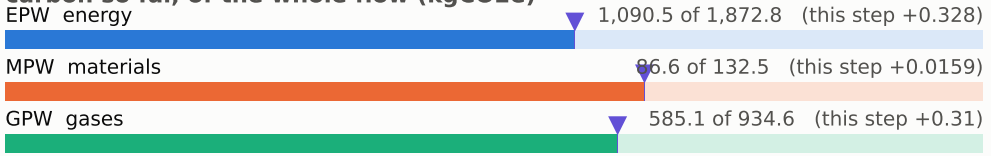

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

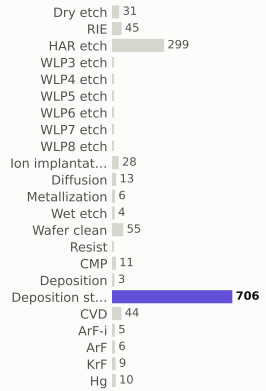

materials deposited (g)

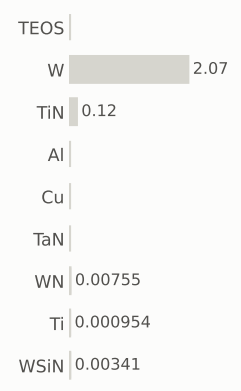

gases emitted (g)

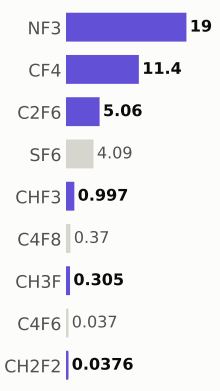

Step #16970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,762.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

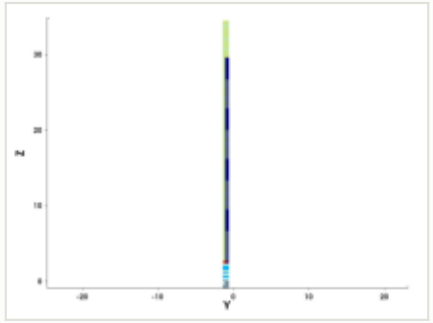

y cut at -1.035 µm

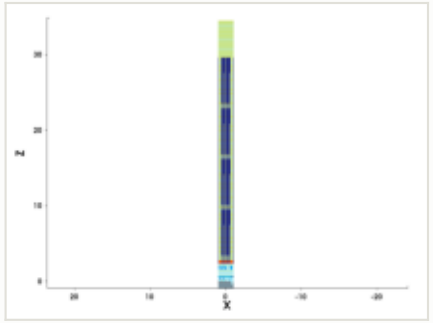

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

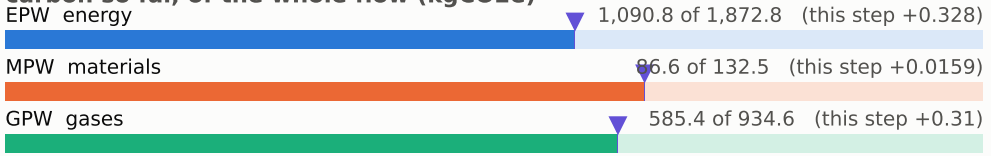

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

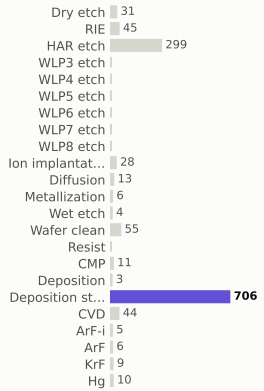

materials deposited (g)

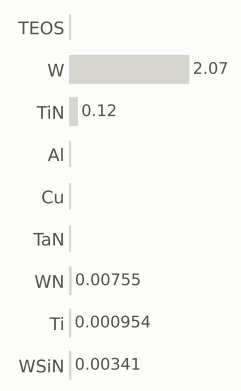

gases emitted (g)

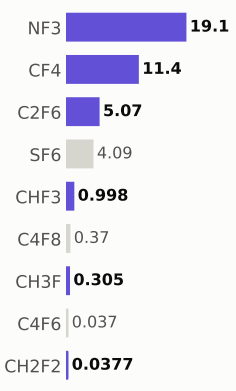

Step #16980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,763.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

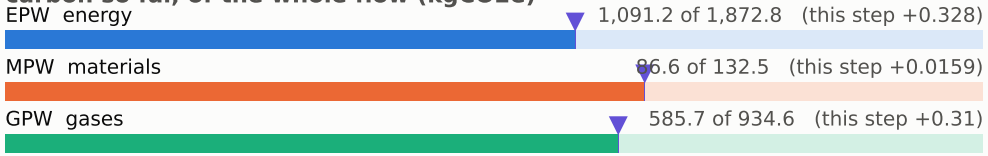

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

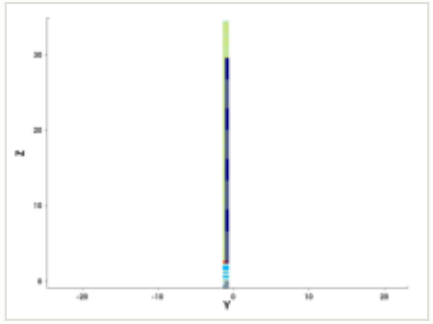

y cut at -1.035 µm

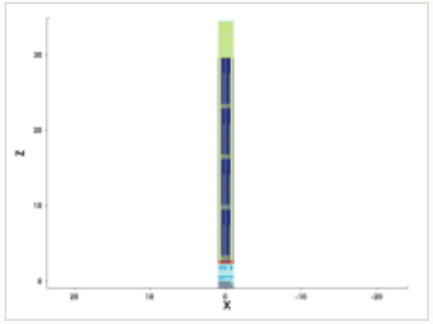

mask for this step

no mask for this step

steps by process area

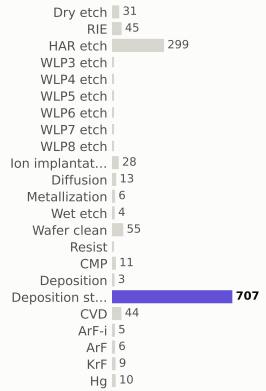

materials deposited (g)

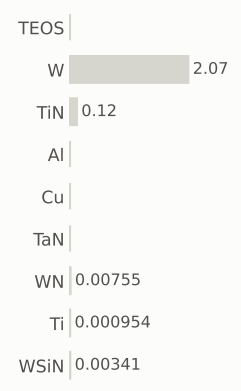

gases emitted (g)

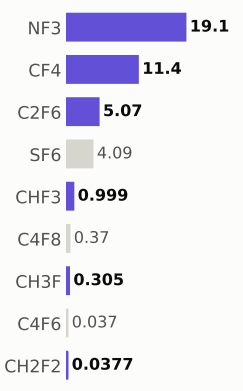

Step #16990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,764.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

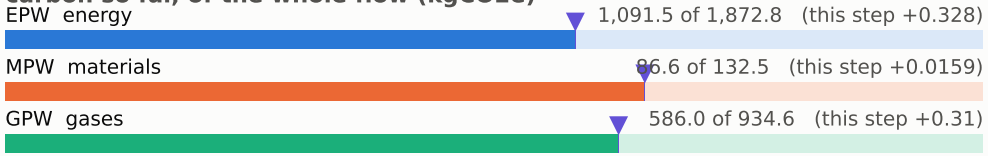

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

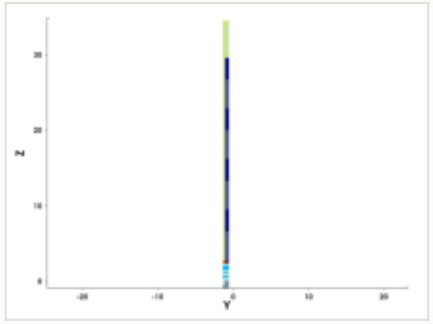

y cut at -1.035 µm

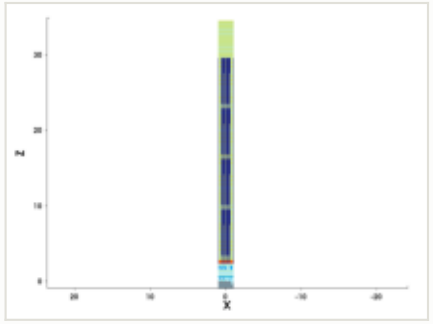

mask for this step

no mask for this step

steps by process area

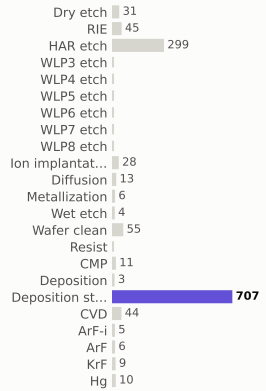

materials deposited (g)

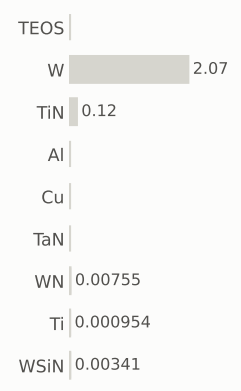

gases emitted (g)

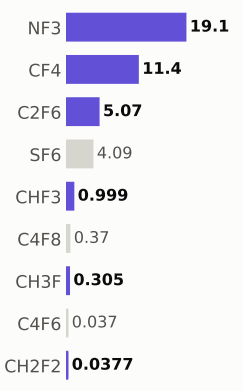

Step #17000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,764.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

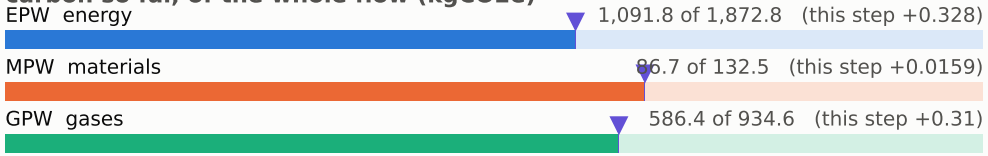

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

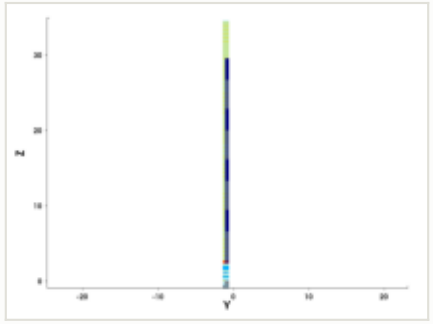

y cut at -1.035 µm

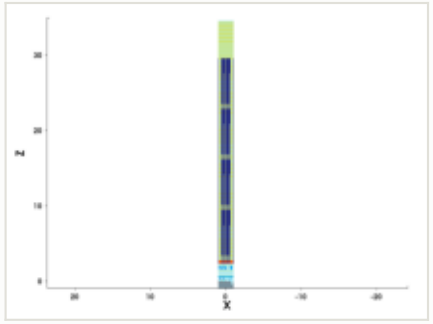

mask for this step

no mask for this step

steps by process area

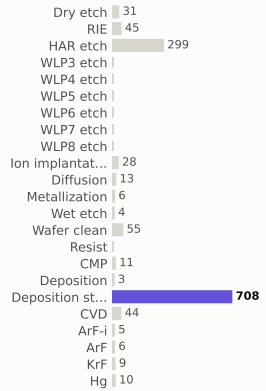

materials deposited (g)

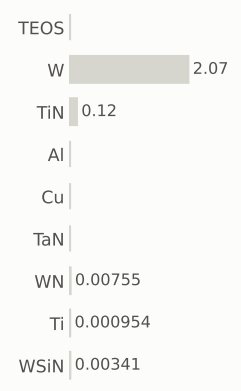

gases emitted (g)

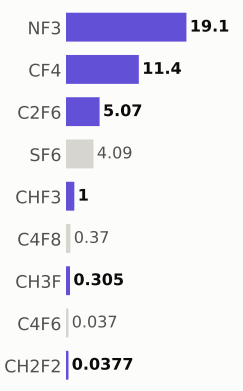

Step #17010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,765.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

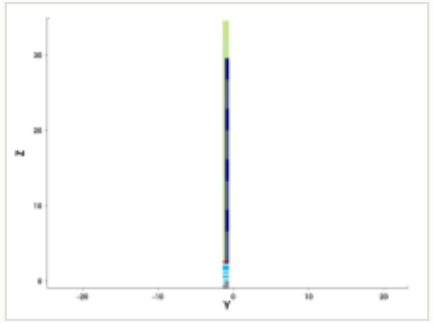

y cut at -1.035 µm

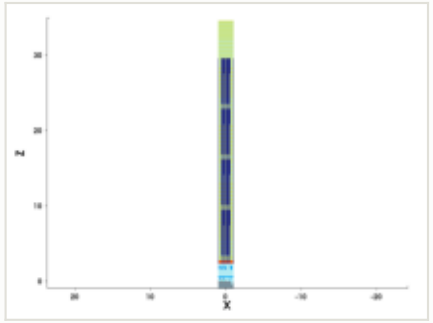

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

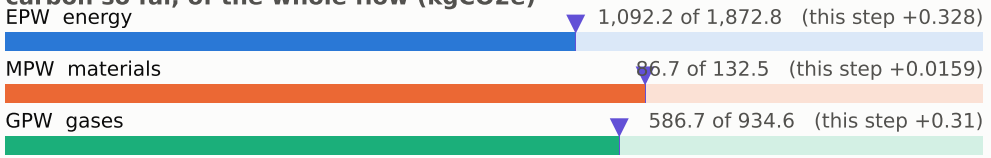

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

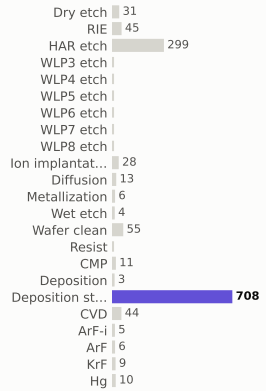

materials deposited (g)

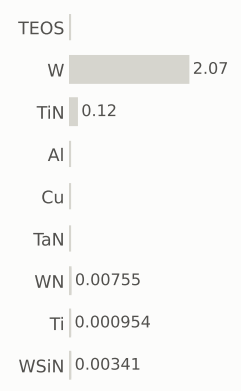

gases emitted (g)

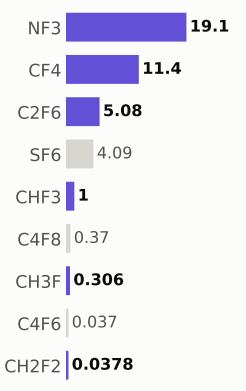

Step #17020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,766.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

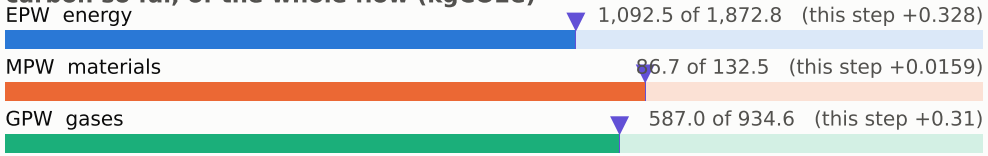

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

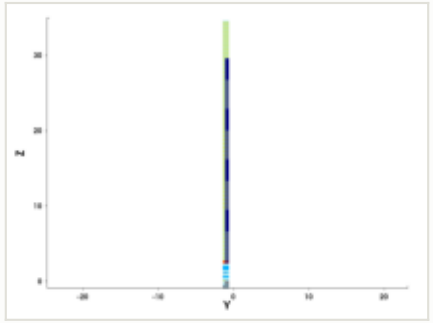

y cut at -1.035 µm

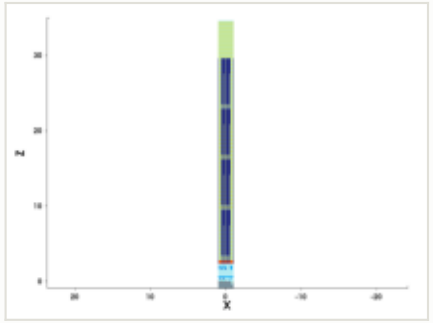

mask for this step

no mask for this step

steps by process area

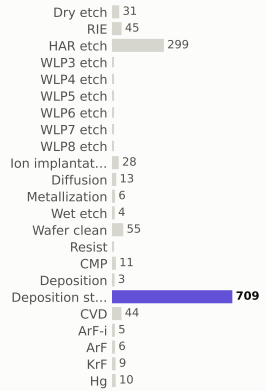

materials deposited (g)

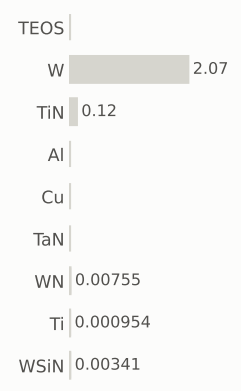

gases emitted (g)

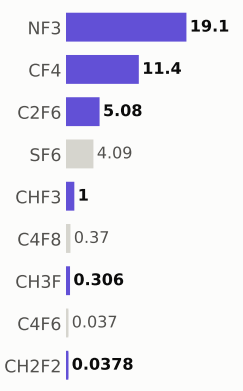

Step #17030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,766.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

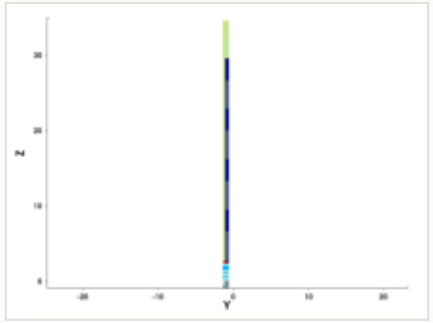

y cut at -1.035 µm

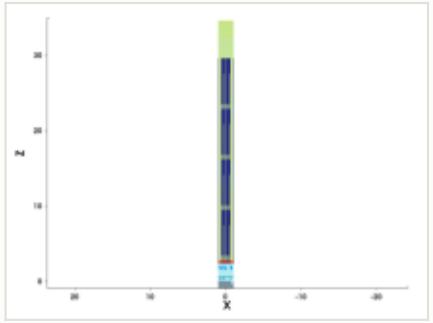

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

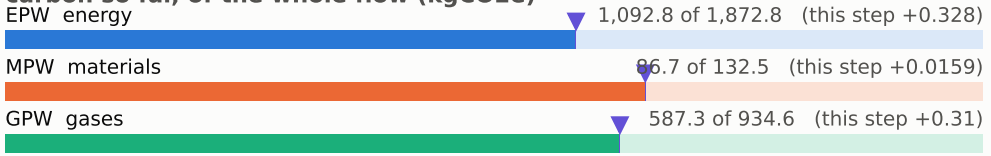

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

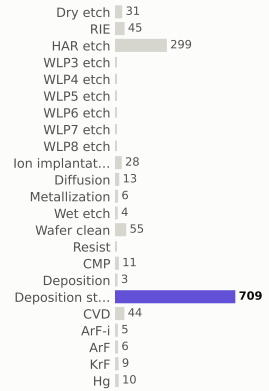

materials deposited (g)

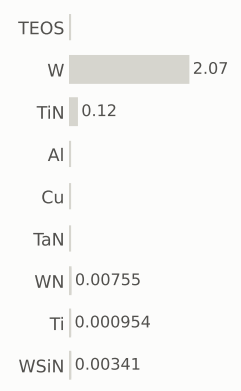

gases emitted (g)

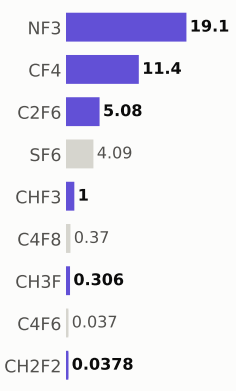

Step #17040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,767.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

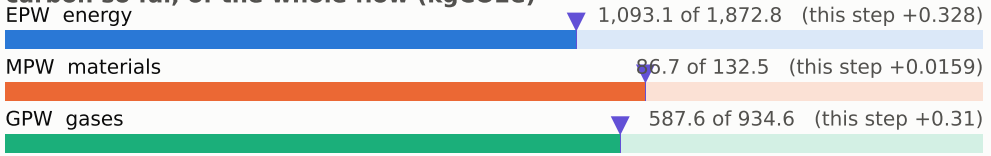

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

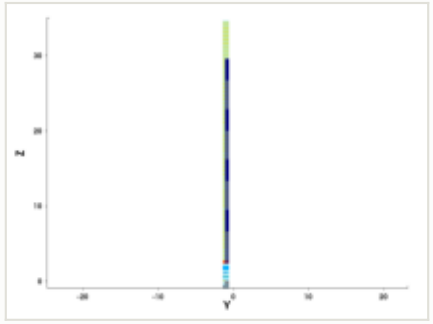

y cut at -1.035 µm

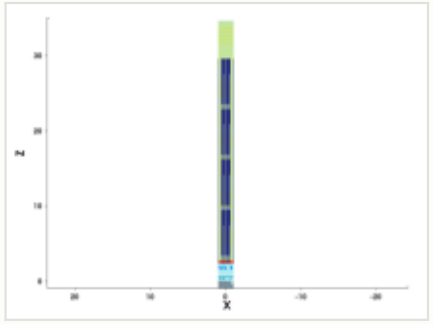

mask for this step

no mask for this step

steps by process area

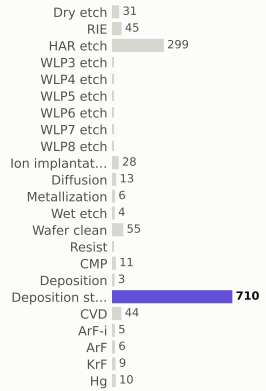

materials deposited (g)

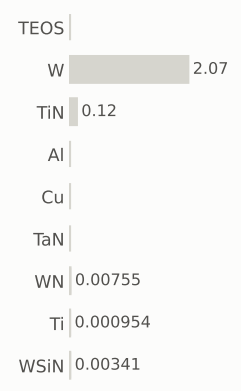

gases emitted (g)

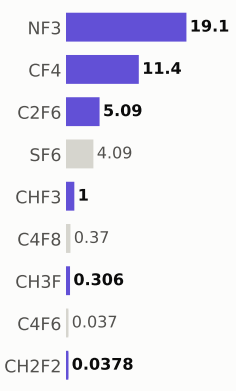

Step #17050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,768.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

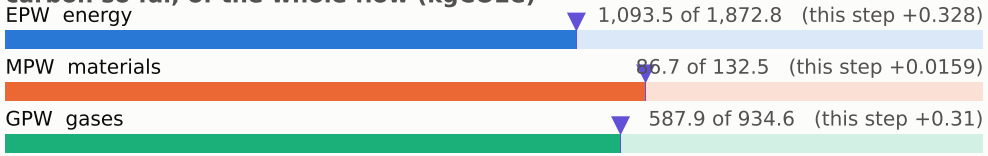

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

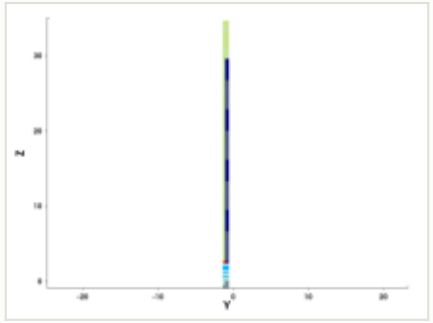

y cut at -1.035 µm

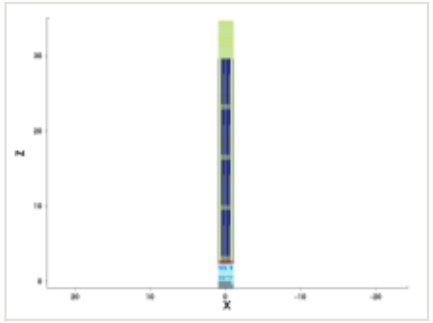

mask for this step

no mask for this step

steps by process area

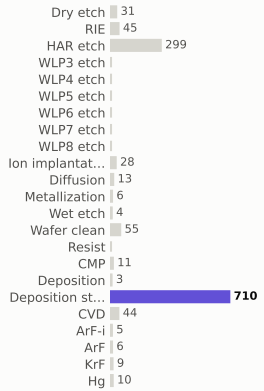

materials deposited (g)

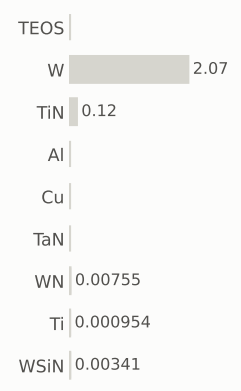

gases emitted (g)

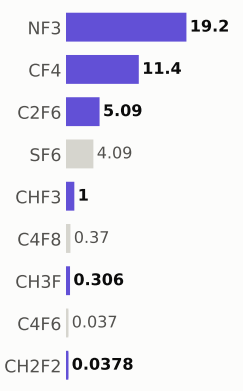

Step #17060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,768.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

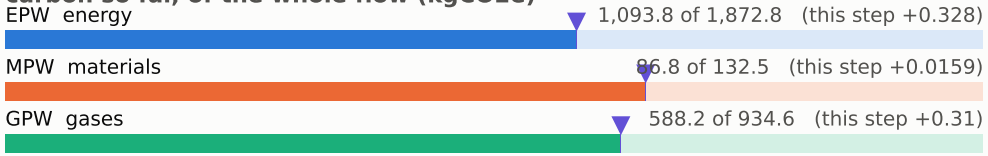

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

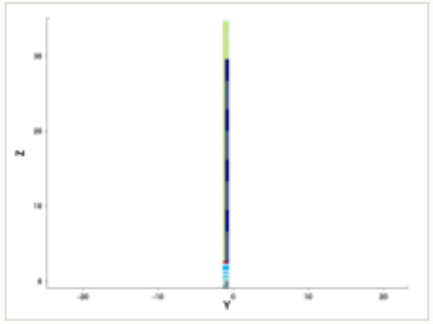

y cut at -1.035 µm

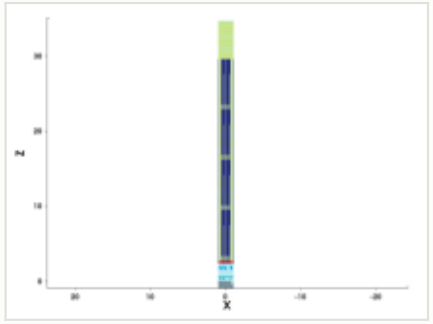

mask for this step

no mask for this step

steps by process area

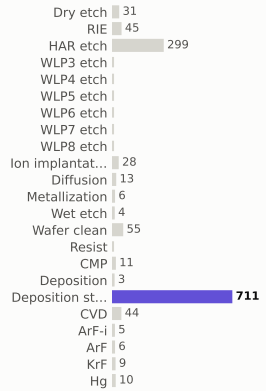

materials deposited (g)

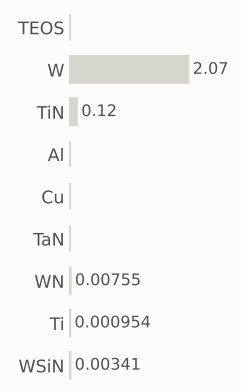

gases emitted (g)

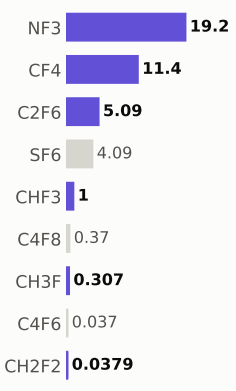

Step #17070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,769.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

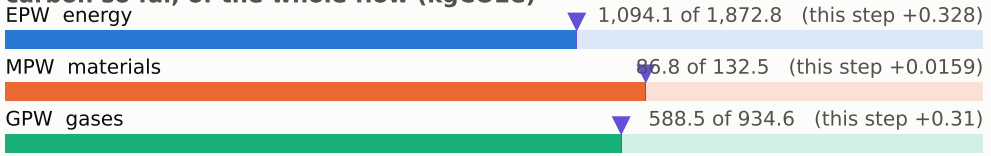

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

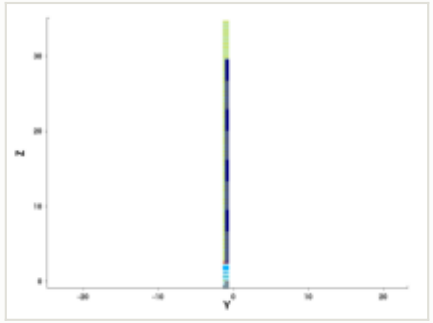

y cut at -1.035 µm

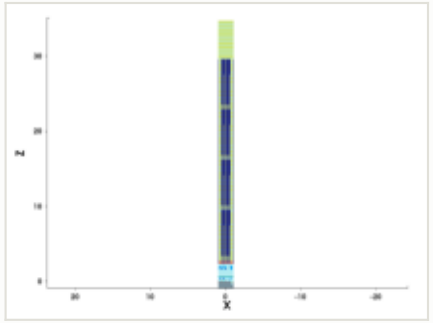

mask for this step

no mask for this step

steps by process area

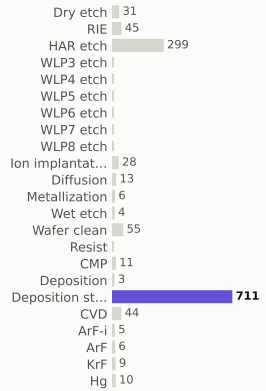

materials deposited (g)

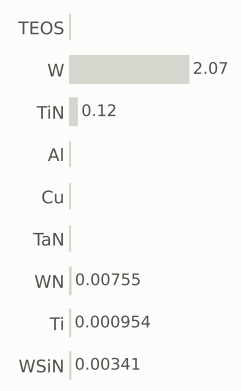

gases emitted (g)

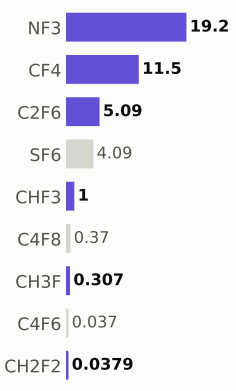

Step #17080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,770.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

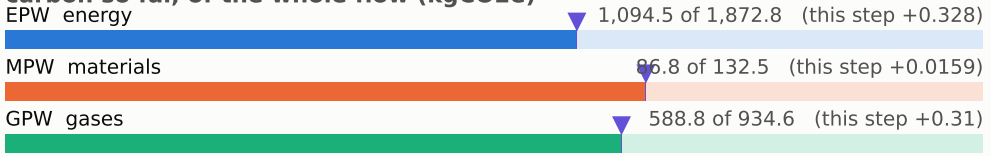

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

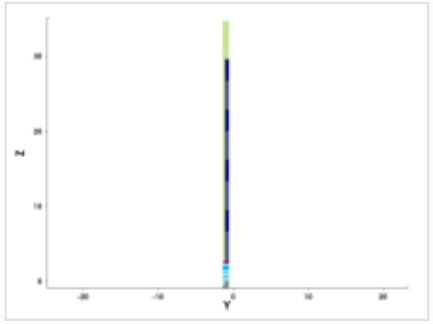

y cut at -1.035 µm

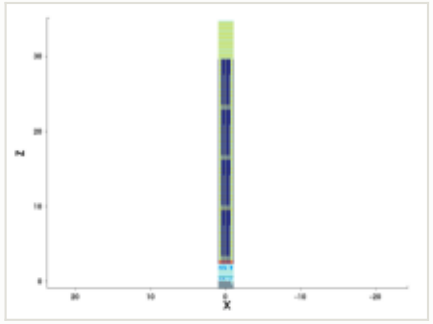

mask for this step

no mask for this step

steps by process area

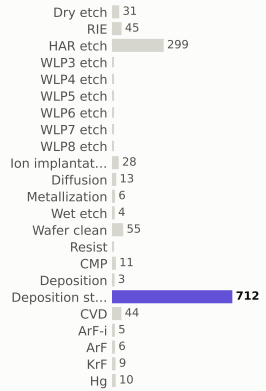

materials deposited (g)

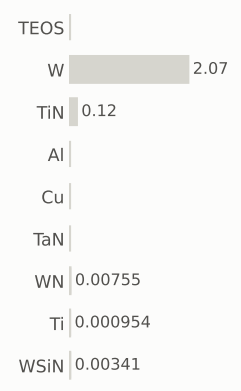

gases emitted (g)

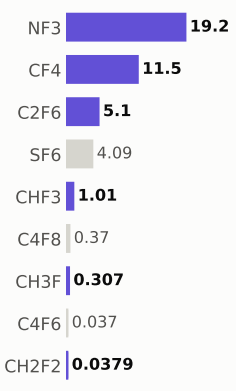

Step #17090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,770.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

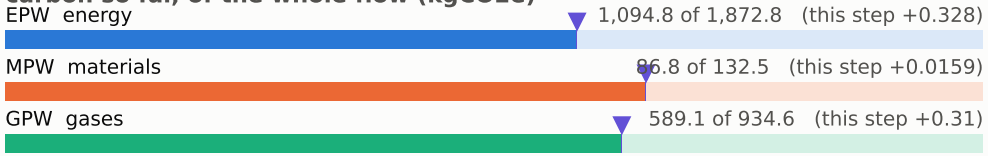

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

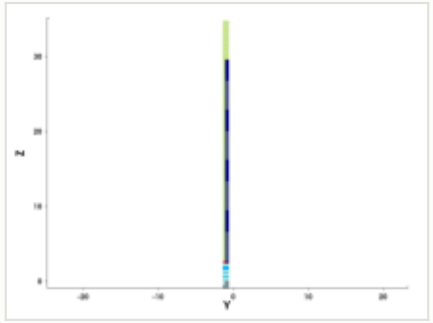

y cut at -1.035 µm

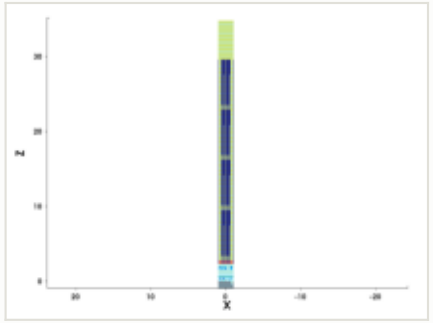

mask for this step

no mask for this step

steps by process area

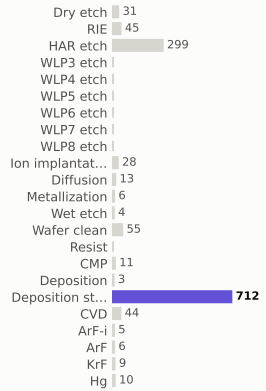

materials deposited (g)

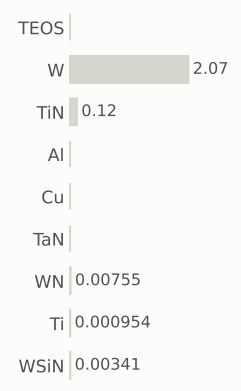

gases emitted (g)

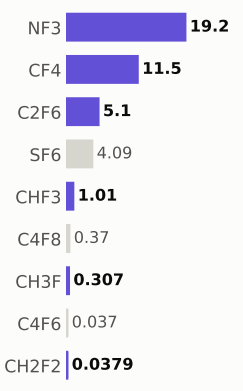

Step #17100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,771.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

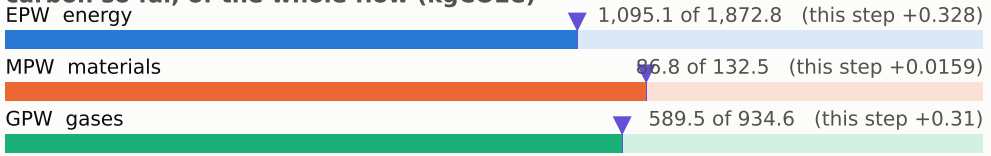

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

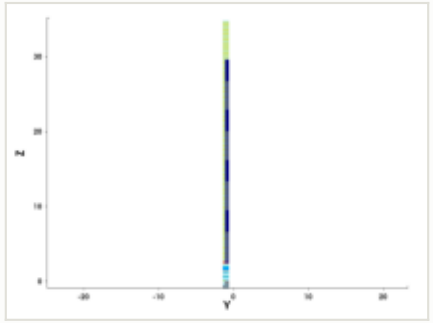

y cut at -1.035 µm

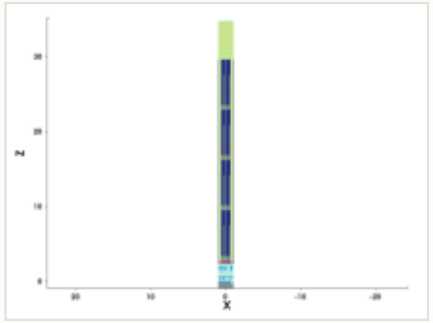

mask for this step

no mask for this step

steps by process area

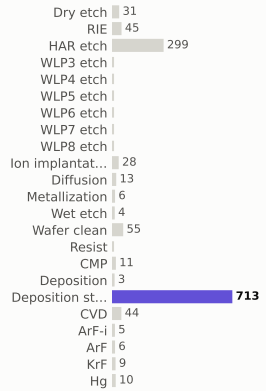

materials deposited (g)

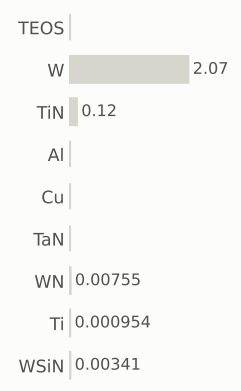

gases emitted (g)

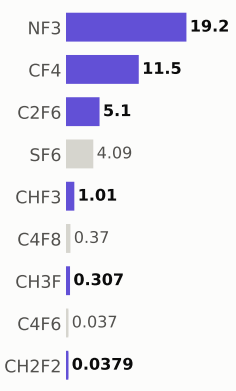

Step #17110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,772.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

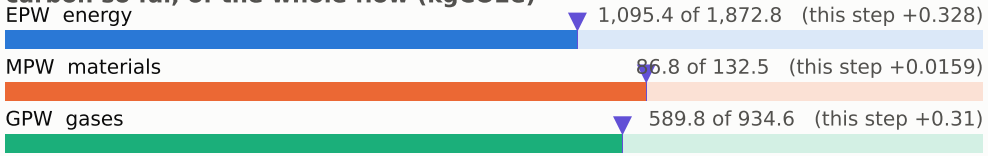

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

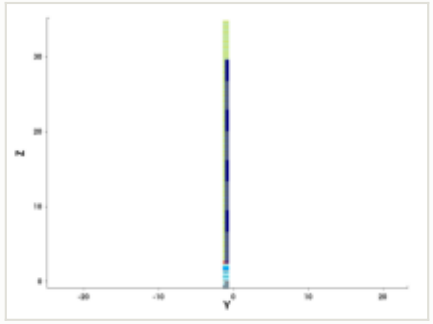

y cut at -1.035 µm

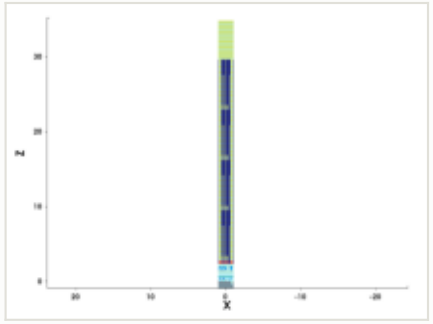

mask for this step

no mask for this step

steps by process area

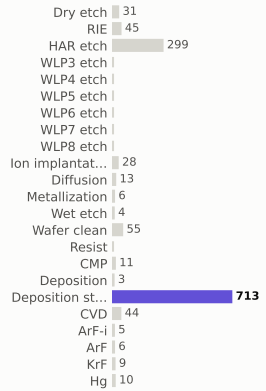

materials deposited (g)

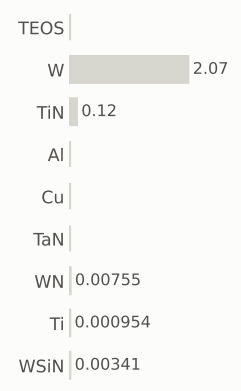

gases emitted (g)

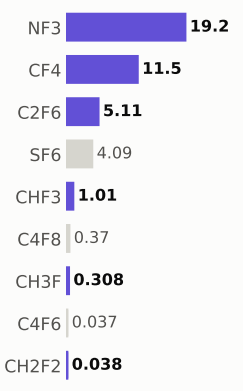

Step #17120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,772.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

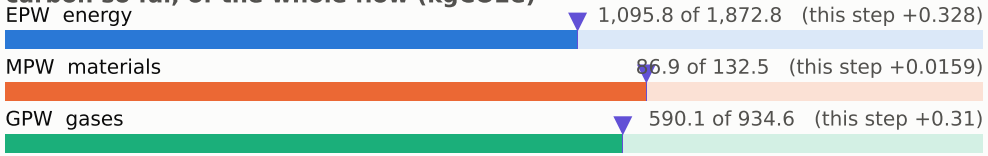

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

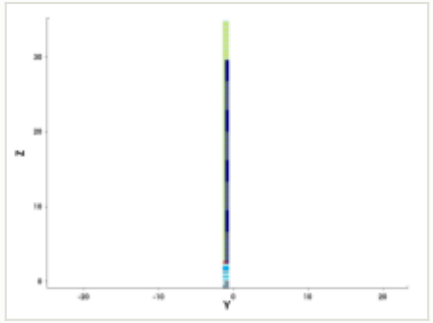

y cut at -1.035 µm

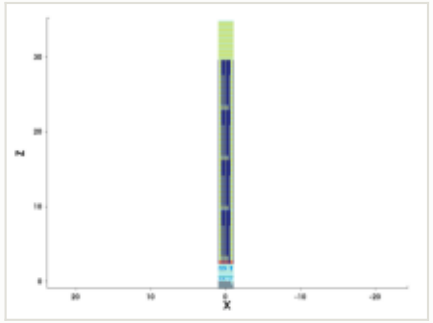

mask for this step

no mask for this step

steps by process area

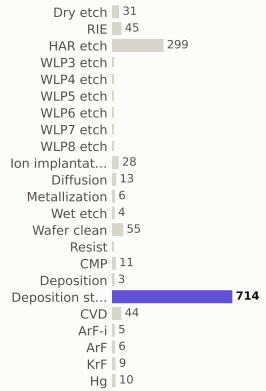

materials deposited (g)

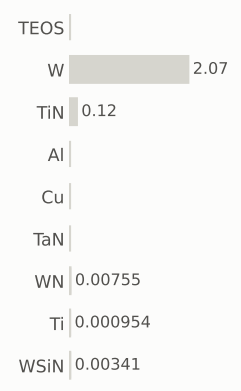

gases emitted (g)

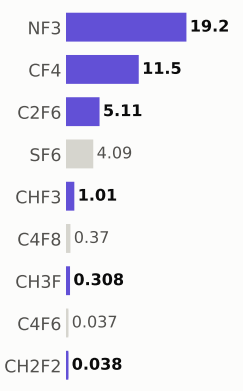

Step #17130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,773.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

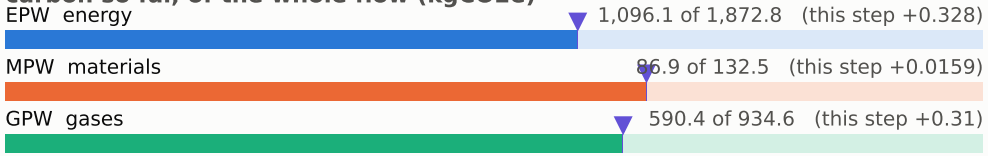

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

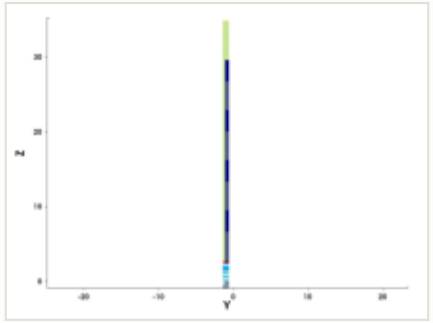

y cut at -1.035 µm

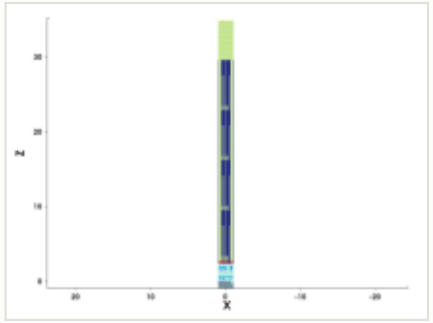

mask for this step

no mask for this step

steps by process area

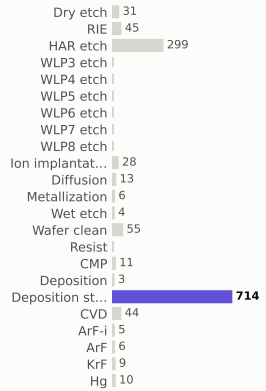

materials deposited (g)

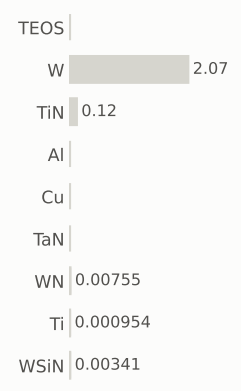

gases emitted (g)

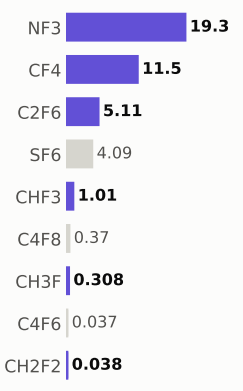

Step #17140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,774.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

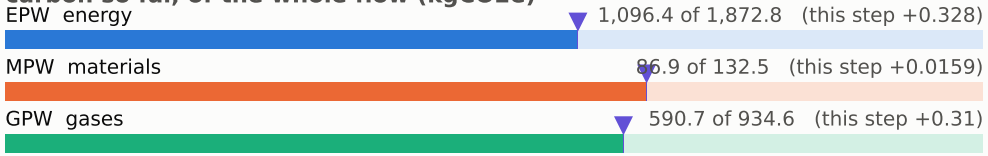

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

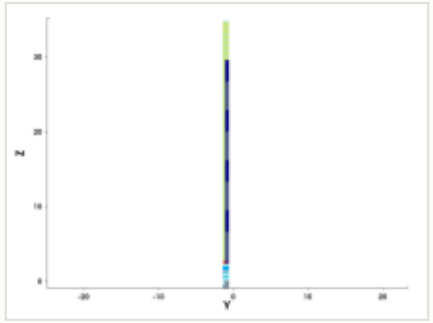

y cut at -1.035 µm

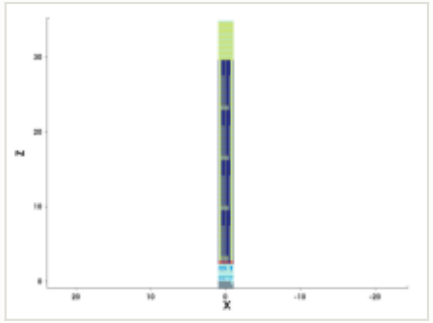

mask for this step

no mask for this step

steps by process area

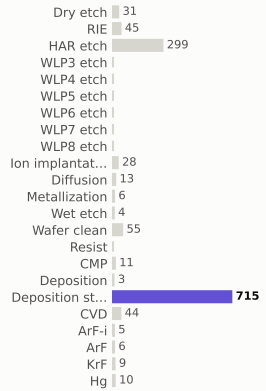

materials deposited (g)

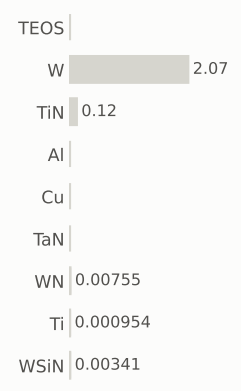

gases emitted (g)

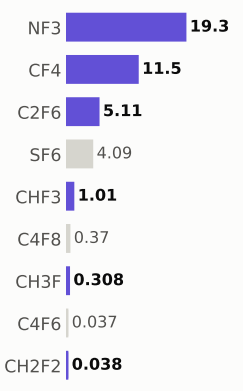

Step #17150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,774.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

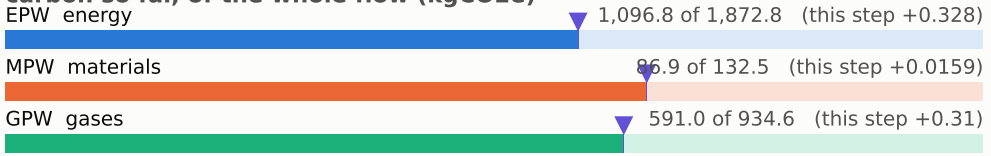

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

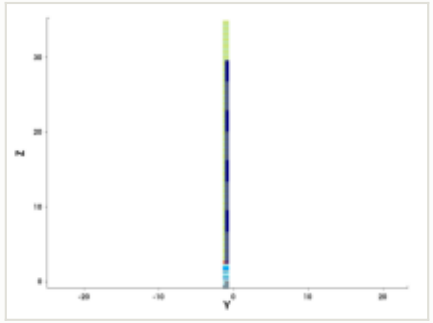

y cut at -1.035 µm

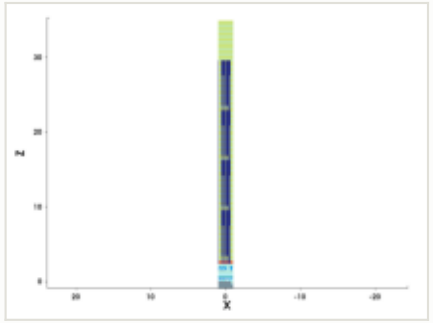

mask for this step

no mask for this step

steps by process area

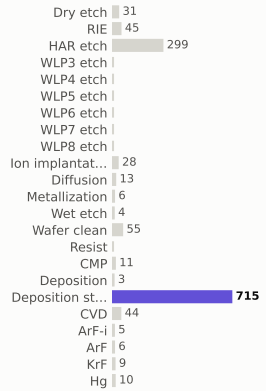

materials deposited (g)

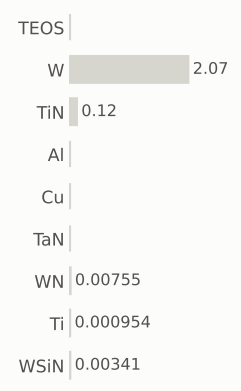

gases emitted (g)

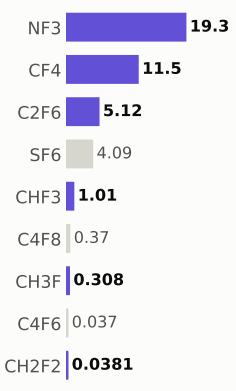

Step #17160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,775.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

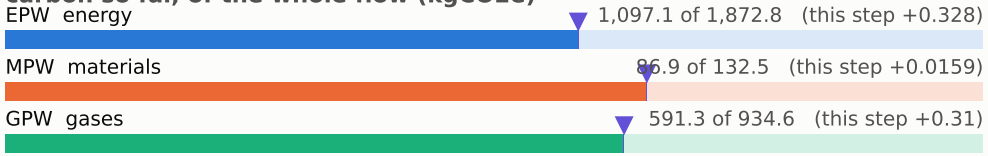

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

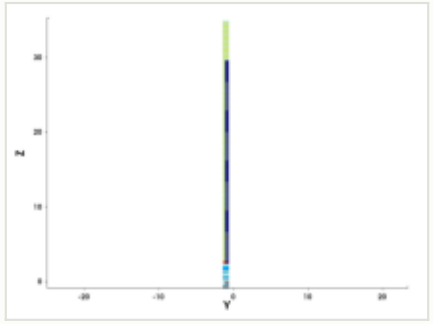

y cut at -1.035 µm

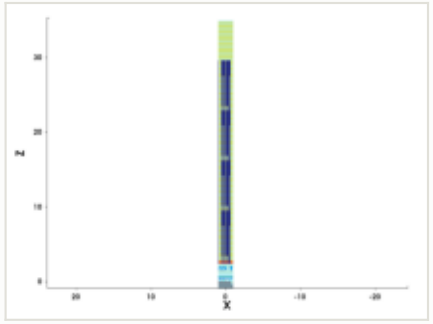

mask for this step

no mask for this step

steps by process area

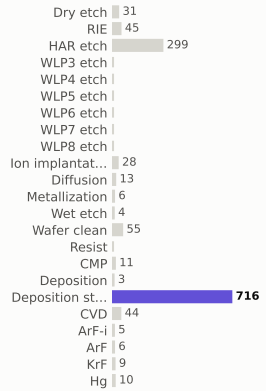

materials deposited (g)

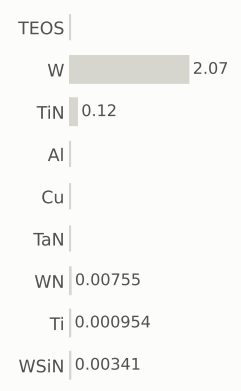

gases emitted (g)

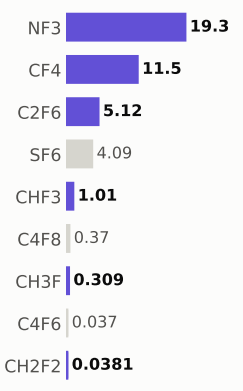

Step #17170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,776.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

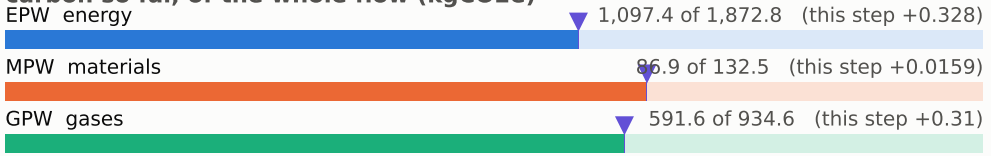

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

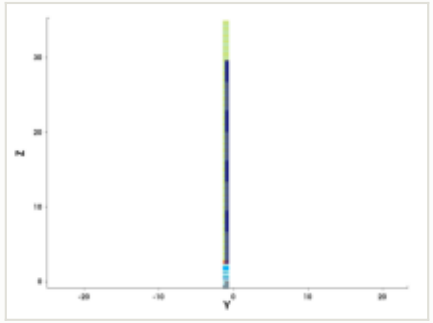

y cut at -1.035 µm

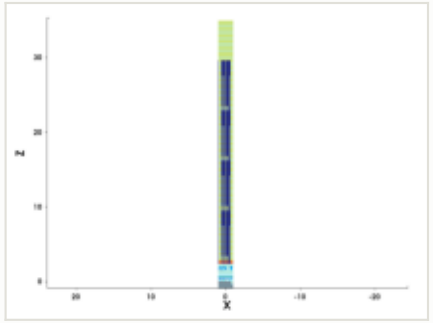

mask for this step

no mask for this step

steps by process area

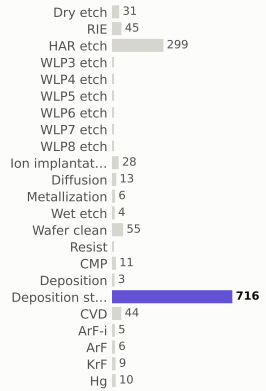

materials deposited (g)

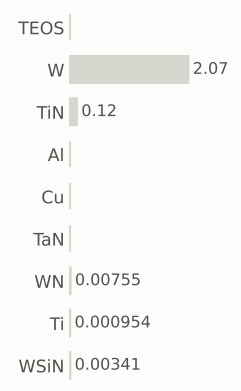

gases emitted (g)

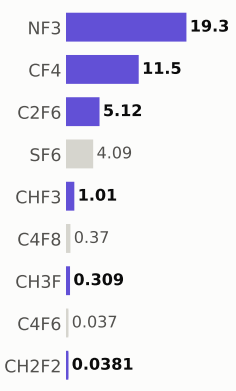

Step #17180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,776.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

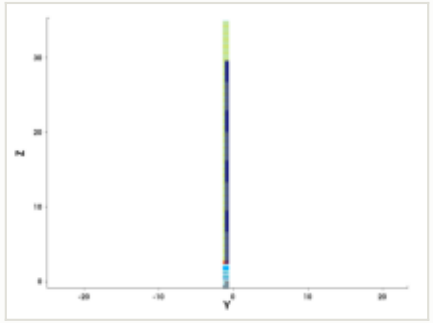

y cut at -1.035 µm

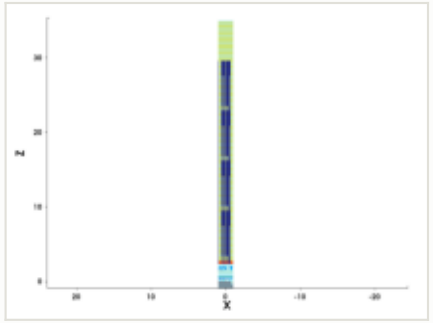

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

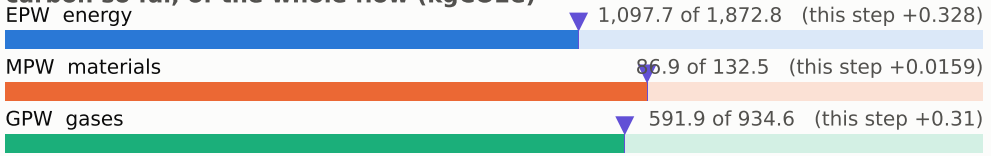

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

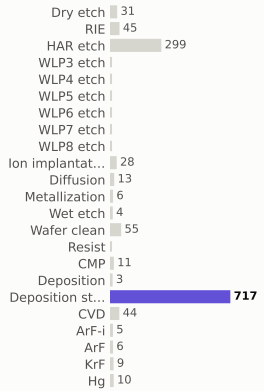

materials deposited (g)

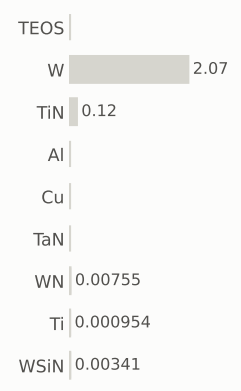

gases emitted (g)

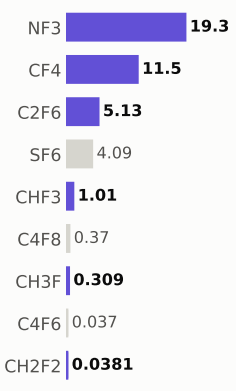

Step #17190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,777.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

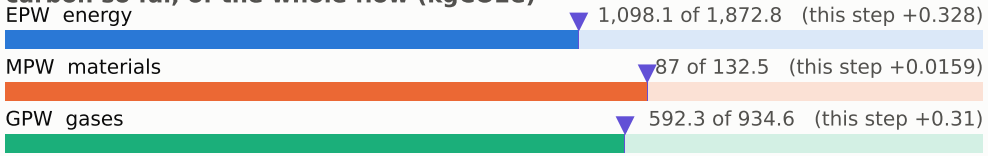

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

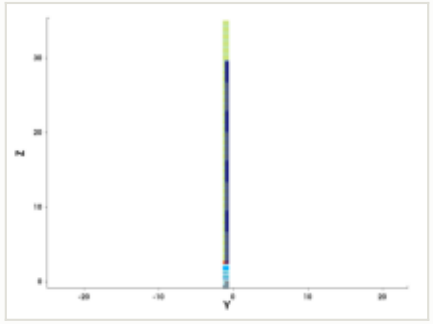

y cut at -1.035 µm

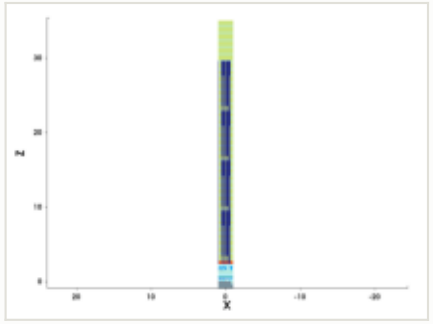

mask for this step

no mask for this step

steps by process area

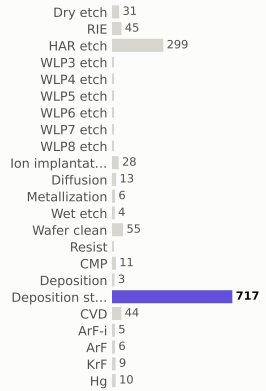

materials deposited (g)

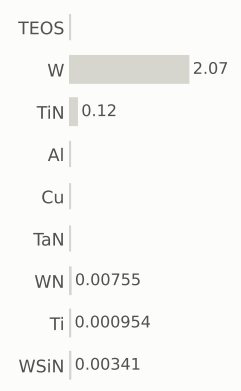

gases emitted (g)

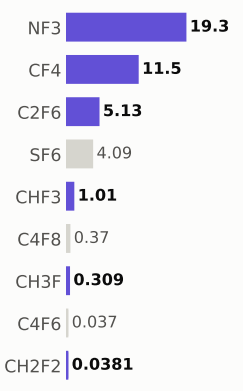

Step #17200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,777.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

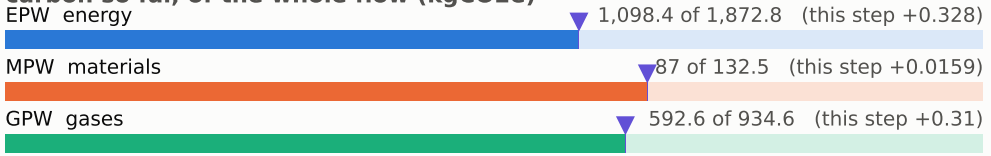

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

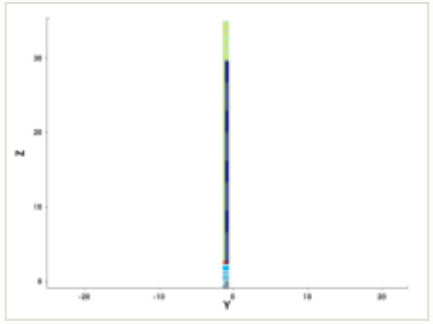

y cut at -1.035 µm

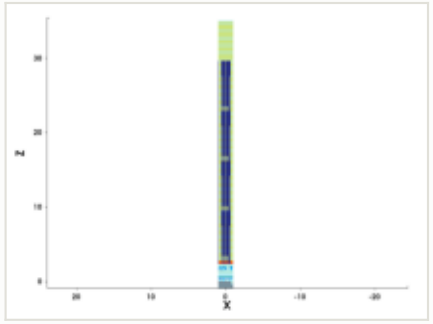

mask for this step

no mask for this step

steps by process area

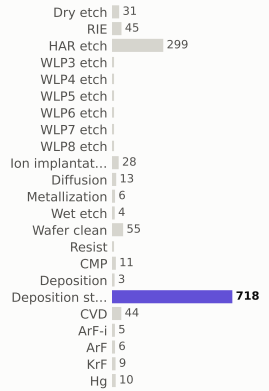

materials deposited (g)

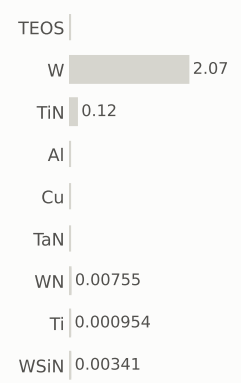

gases emitted (g)

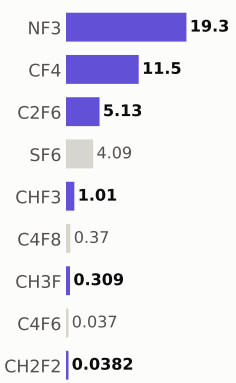

Step #17210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,778.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

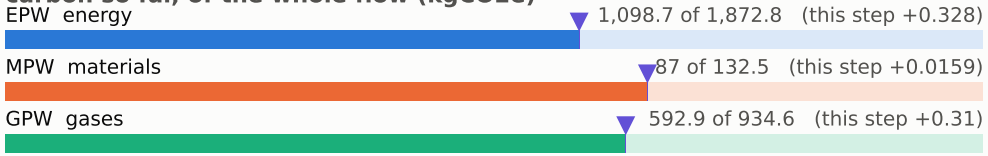

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

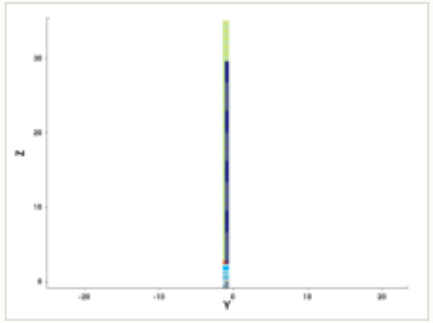

y cut at -1.035 µm

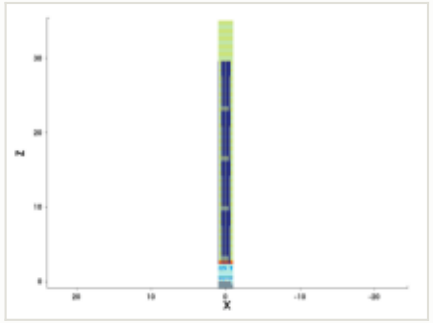

mask for this step

no mask for this step

steps by process area

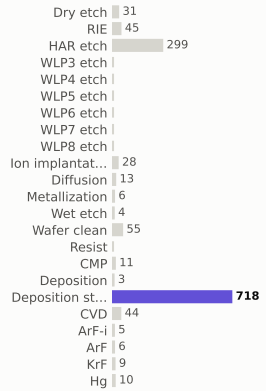

materials deposited (g)

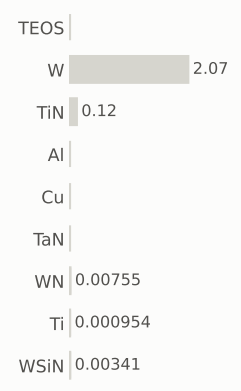

gases emitted (g)

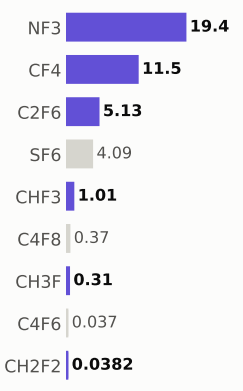

Step #17220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,779.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

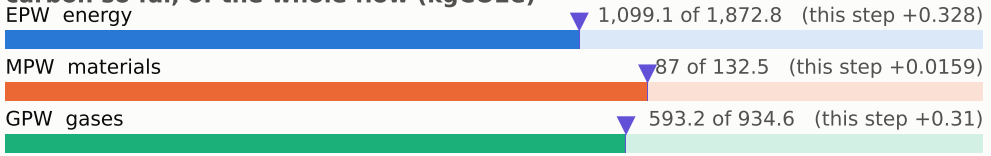

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

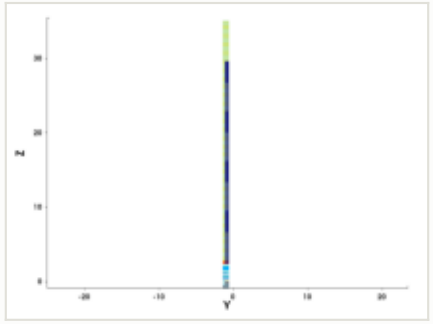

y cut at -1.035 µm

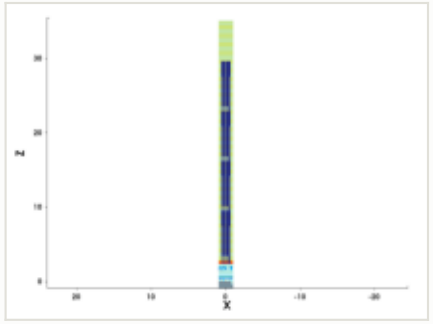

mask for this step

no mask for this step

steps by process area

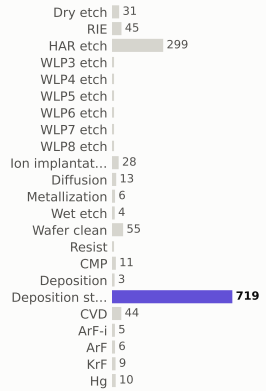

materials deposited (g)

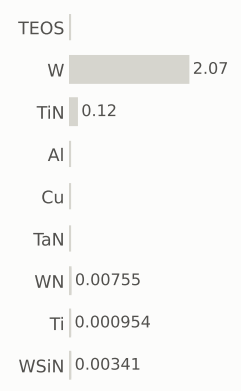

gases emitted (g)

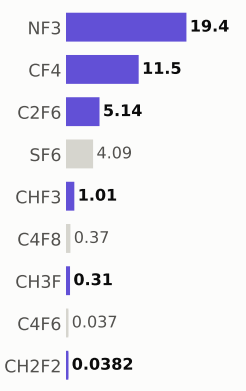

Step #17230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,779.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

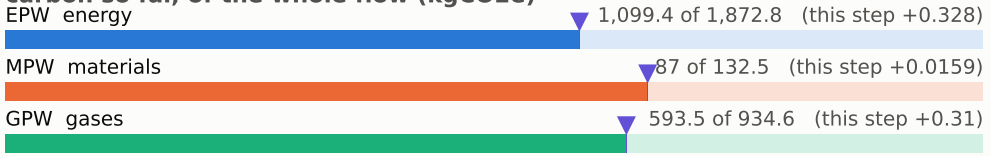

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

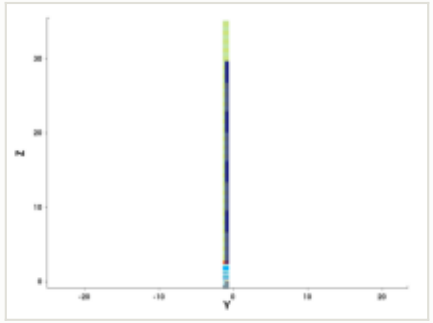

y cut at -1.035 µm

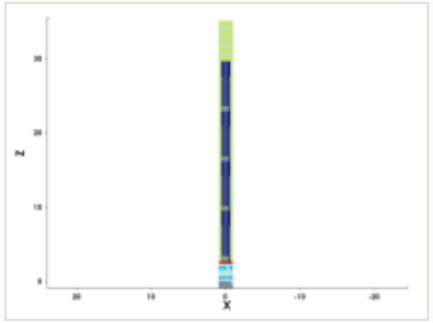

mask for this step

no mask for this step

steps by process area

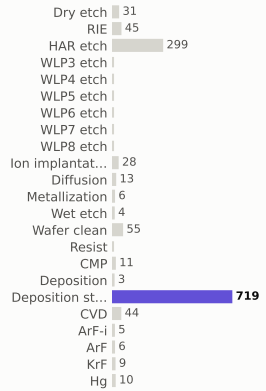

materials deposited (g)

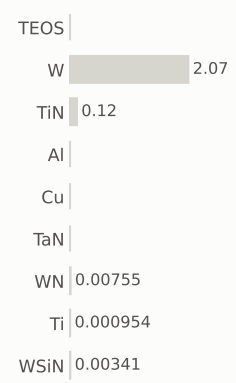

gases emitted (g)

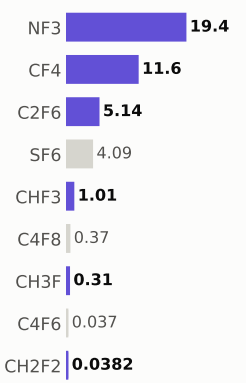

Step #17240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,780.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

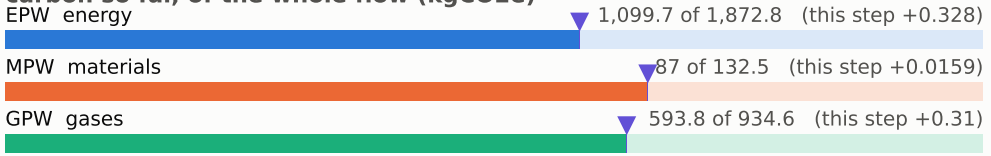

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

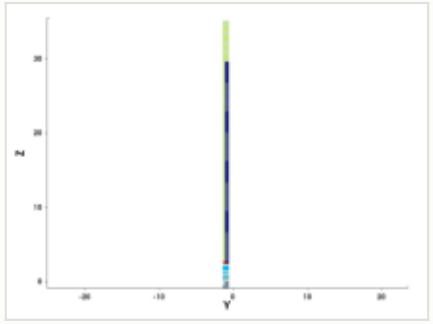

y cut at -1.035 µm

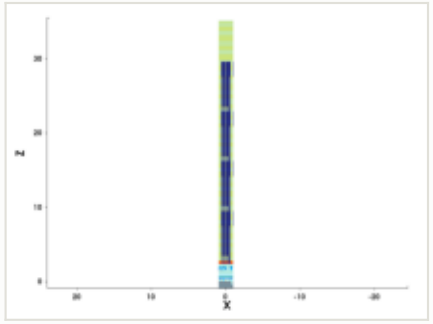

mask for this step

no mask for this step

steps by process area

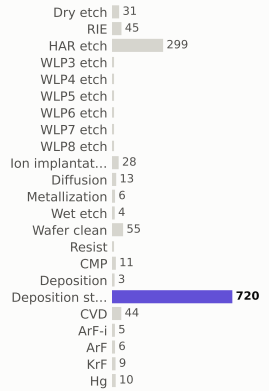

materials deposited (g)

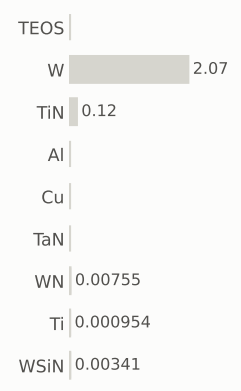

gases emitted (g)

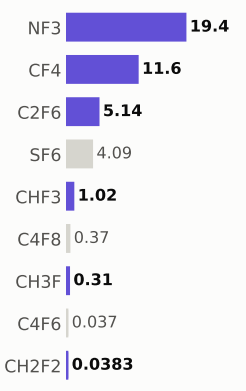

Step #17250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,781.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

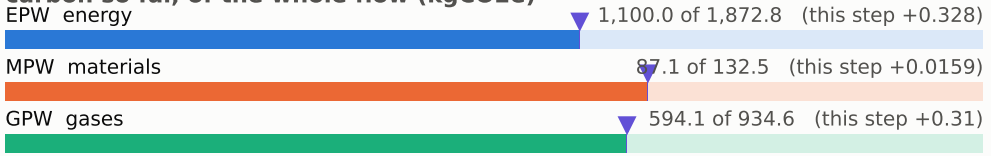

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

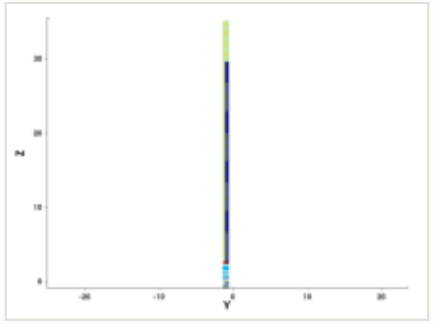

y cut at -1.035 µm

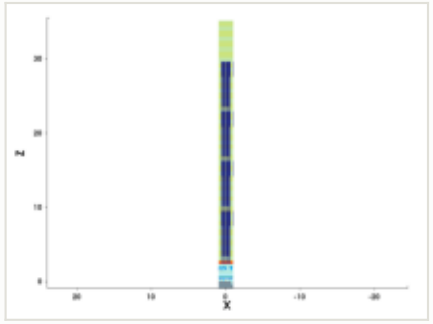

mask for this step

no mask for this step

steps by process area

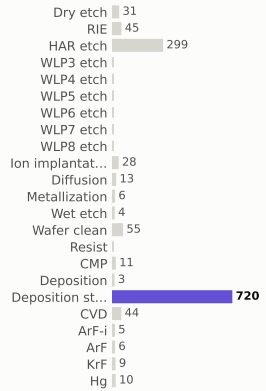

materials deposited (g)

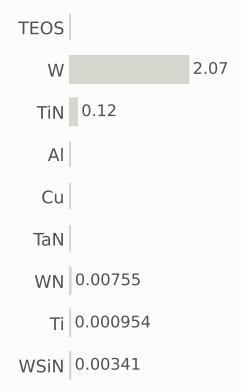

gases emitted (g)

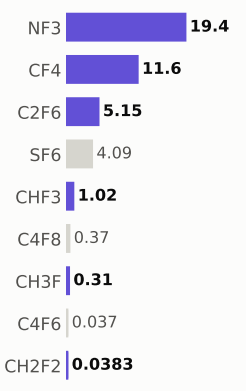

Step #17260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,781.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

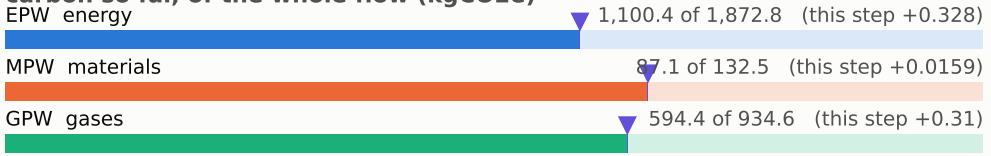

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

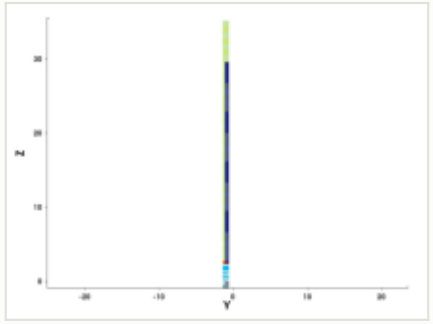

y cut at -1.035 µm

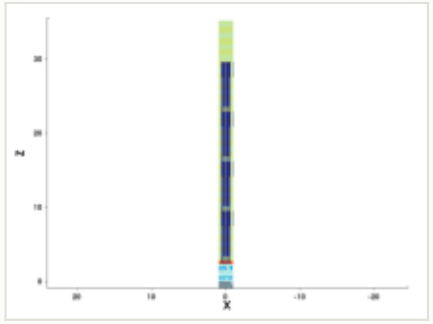

mask for this step

no mask for this step

steps by process area

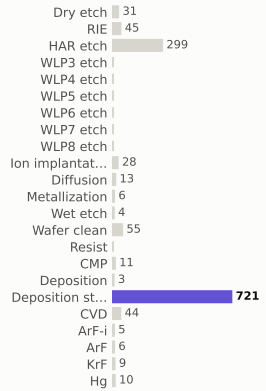

materials deposited (g)

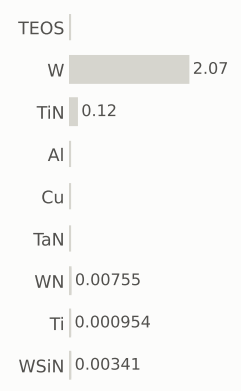

gases emitted (g)

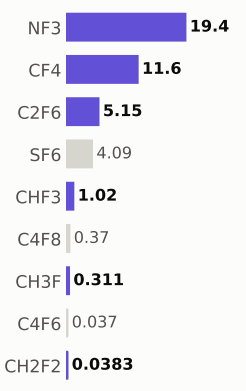

Step #17270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,782.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

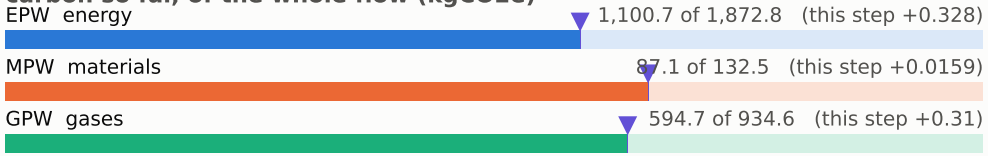

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

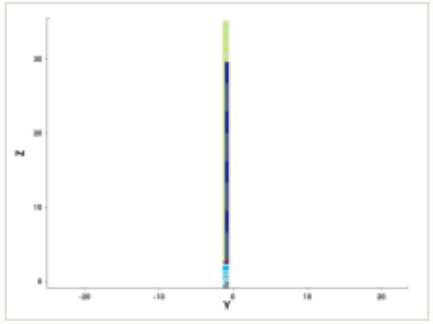

y cut at -1.035 µm

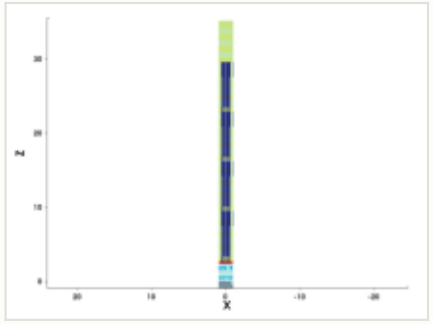

mask for this step

no mask for this step

steps by process area

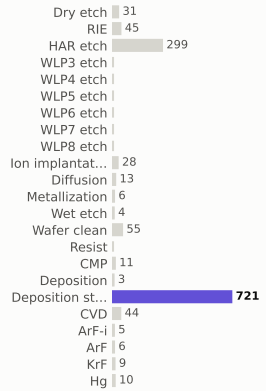

materials deposited (g)

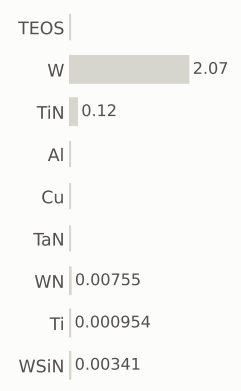

gases emitted (g)

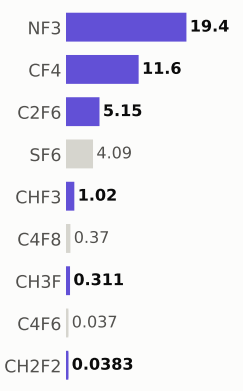

Step #17280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,783.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

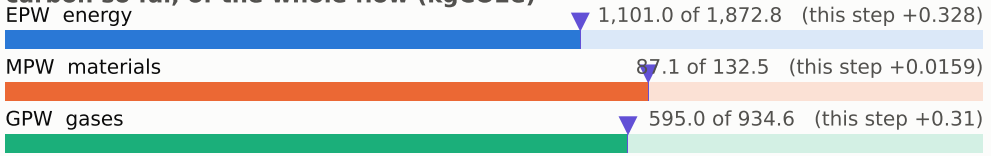

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

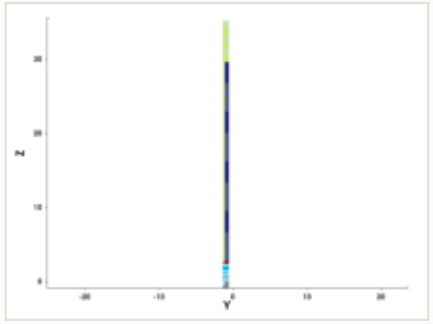

y cut at -1.035 µm

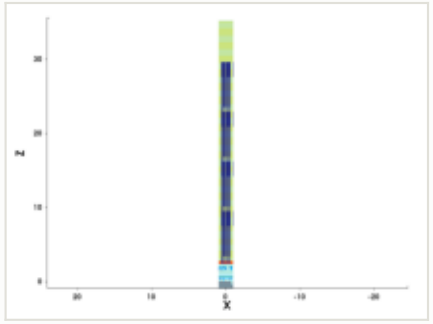

mask for this step

no mask for this step

steps by process area

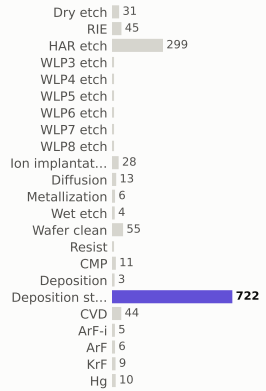

materials deposited (g)

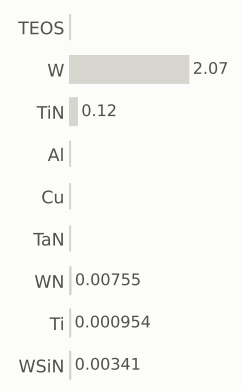

gases emitted (g)

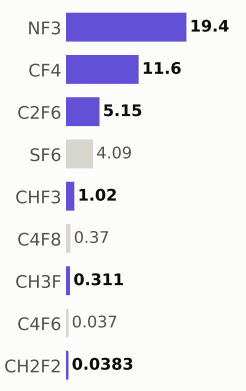

Step #17290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,783.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

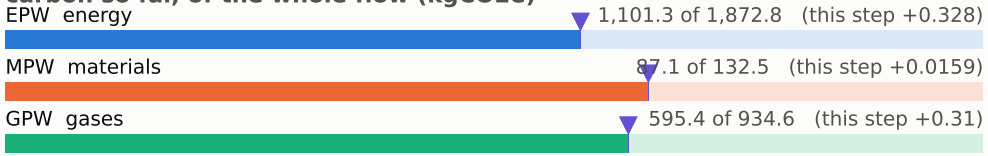

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

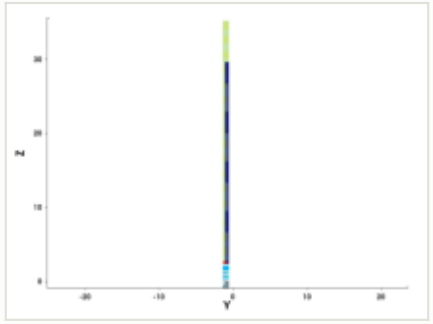

y cut at -1.035 µm

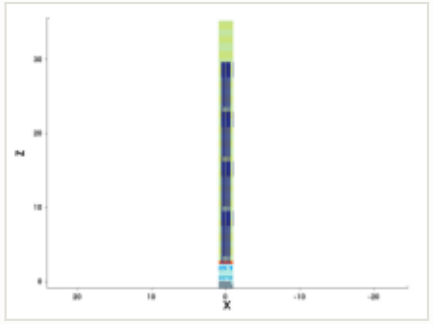

mask for this step

no mask for this step

steps by process area

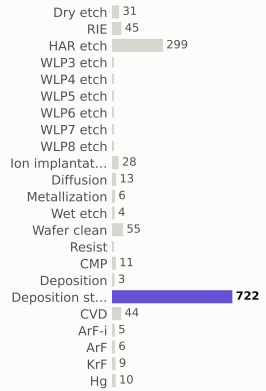

materials deposited (g)

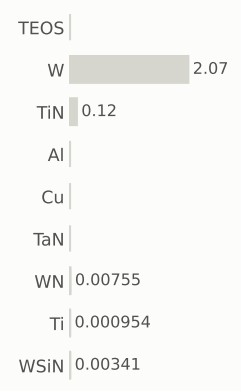

gases emitted (g)

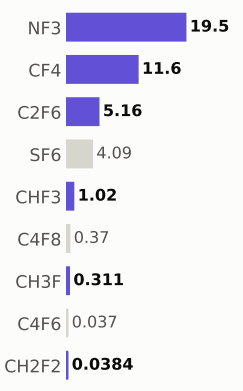

Step #17300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,784.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

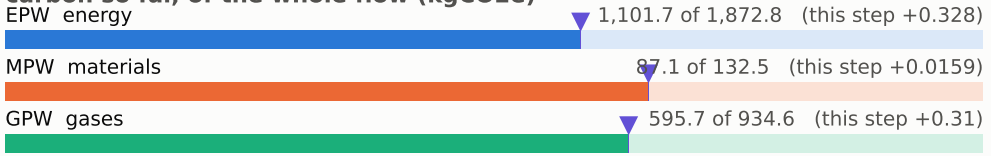

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

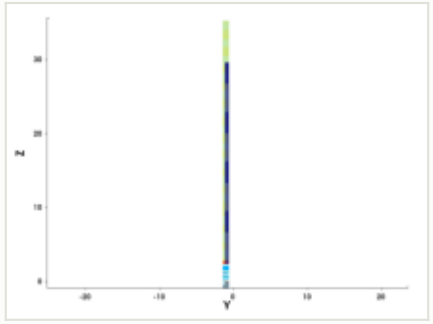

y cut at -1.035 µm

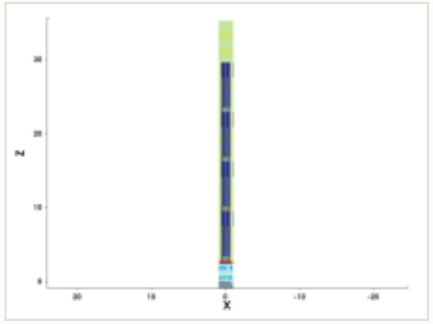

mask for this step

no mask for this step

steps by process area

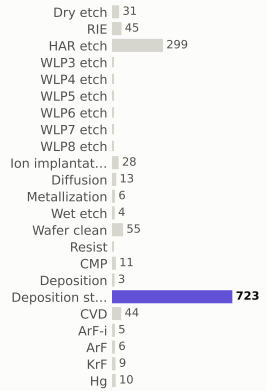

materials deposited (g)

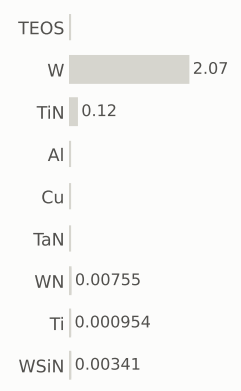

gases emitted (g)

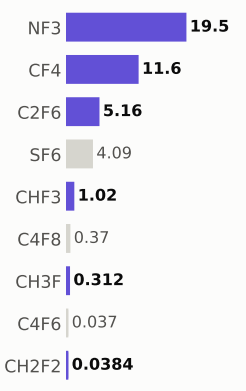

Step #17310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,785.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

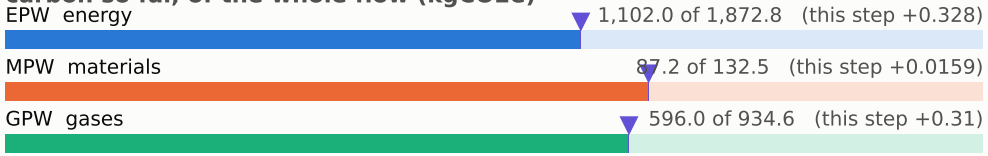

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

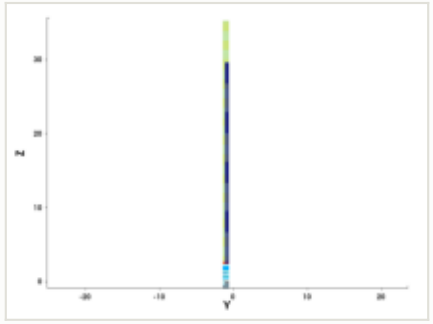

y cut at -1.035 µm

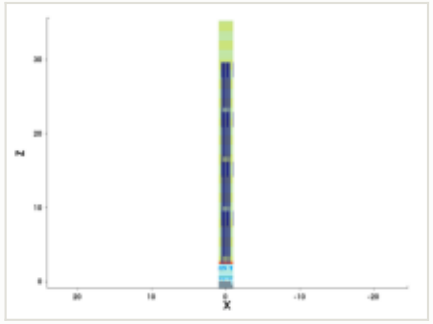

mask for this step

no mask for this step

steps by process area

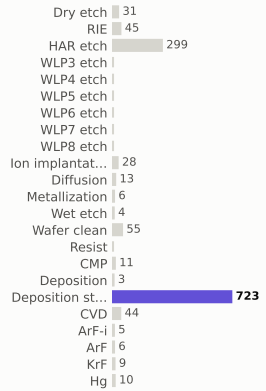

materials deposited (g)

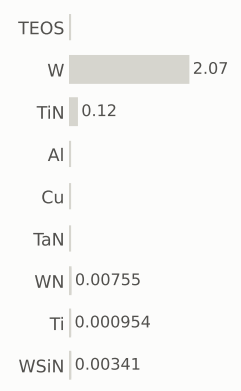

gases emitted (g)

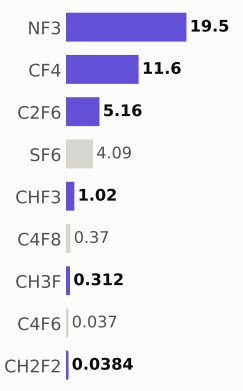

Step #17320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,785.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

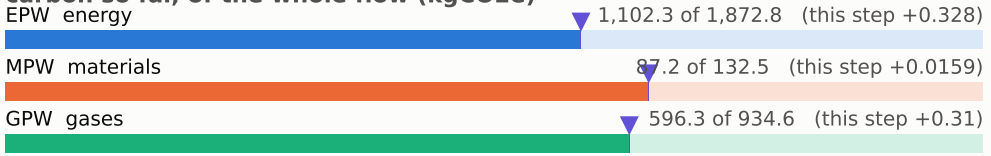

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

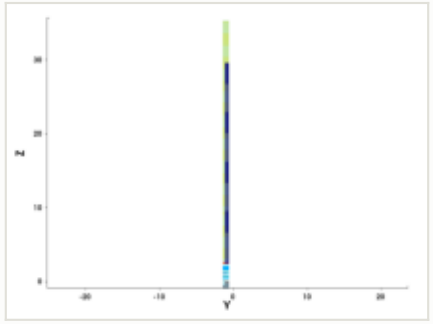

y cut at -1.035 µm

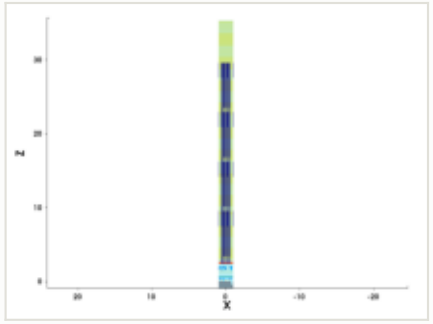

mask for this step

no mask for this step

steps by process area

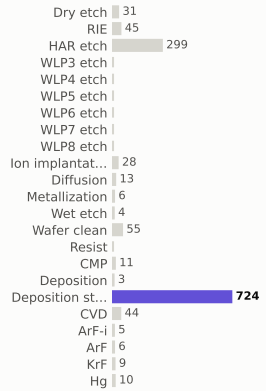

materials deposited (g)

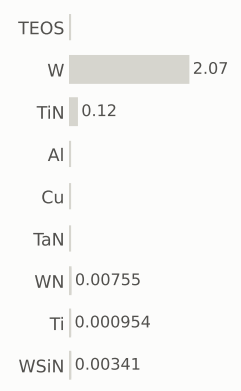

gases emitted (g)

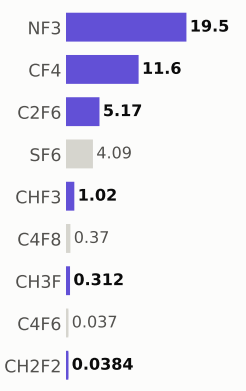

Step #17330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,786.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

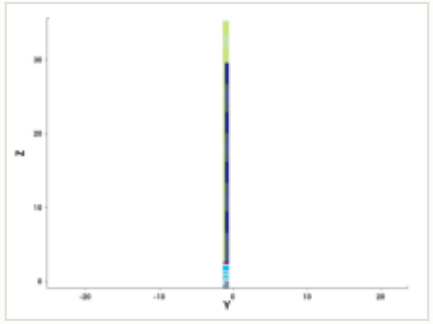

y cut at -1.035 µm

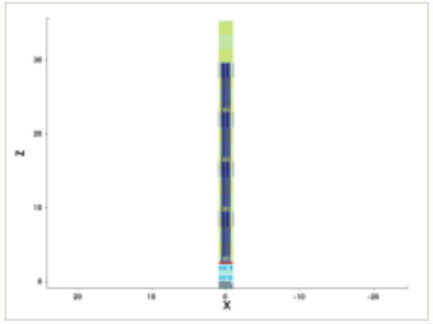

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

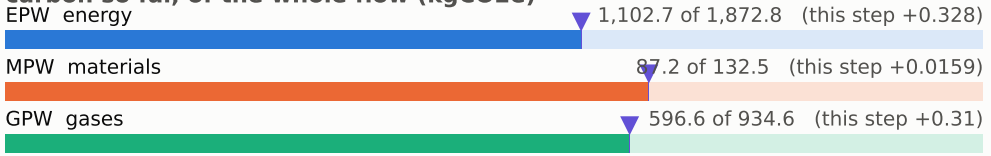

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

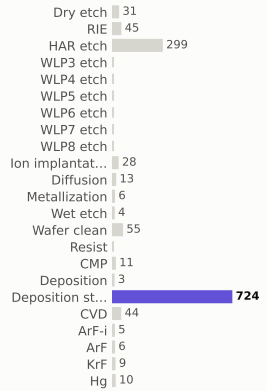

materials deposited (g)

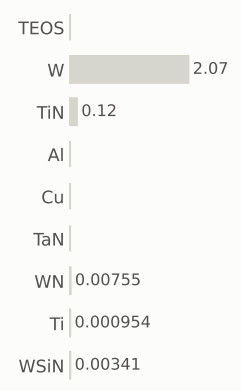

gases emitted (g)

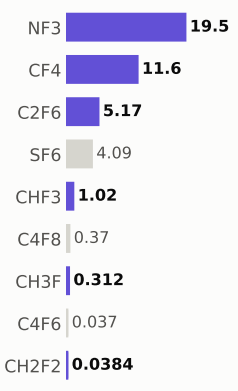

Step #17340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,787.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

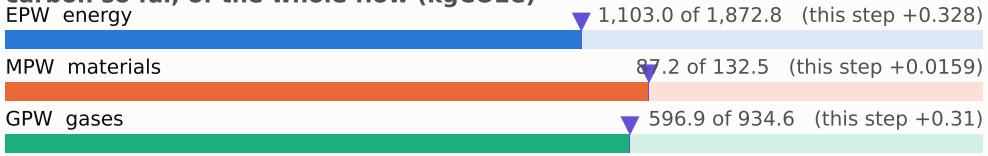

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

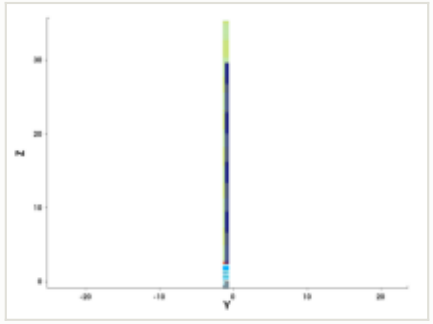

y cut at -1.035 µm

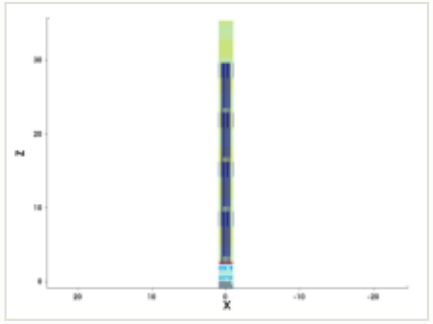

mask for this step

no mask for this step

steps by process area

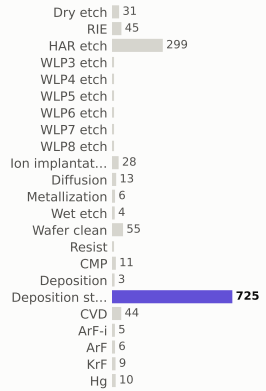

materials deposited (g)

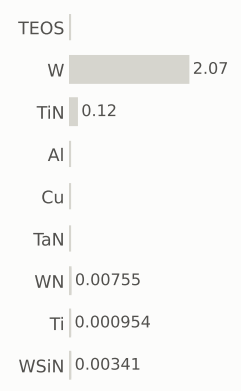

gases emitted (g)

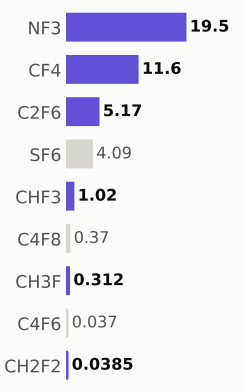

Step #17350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,787.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

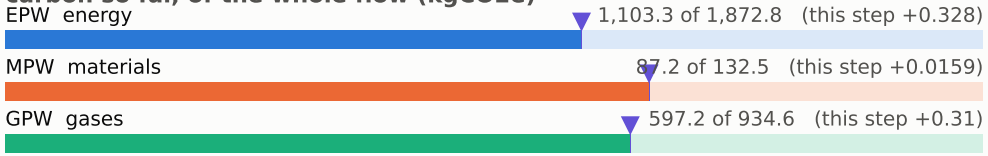

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

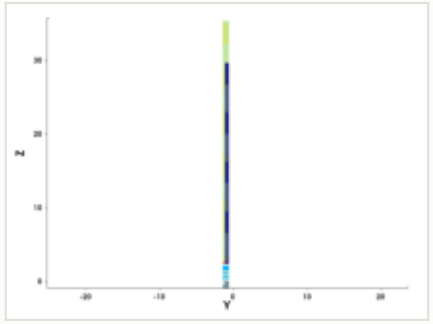

y cut at -1.035 µm

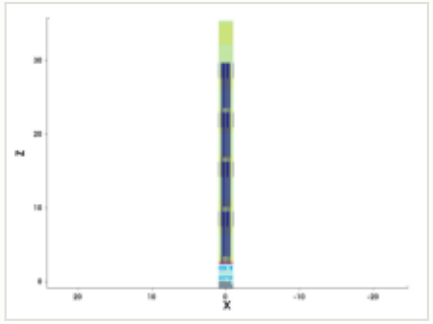

mask for this step

no mask for this step

steps by process area

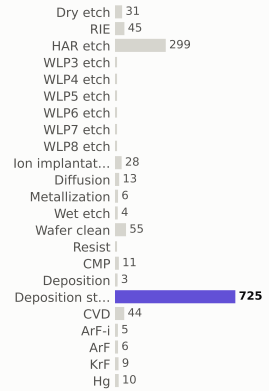

materials deposited (g)

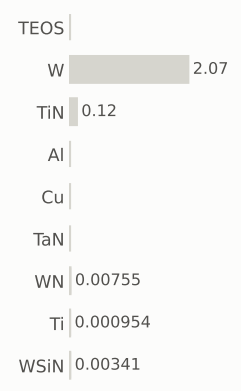

gases emitted (g)

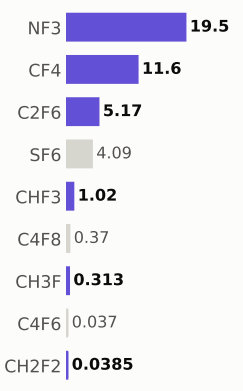

Step #17360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,788.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

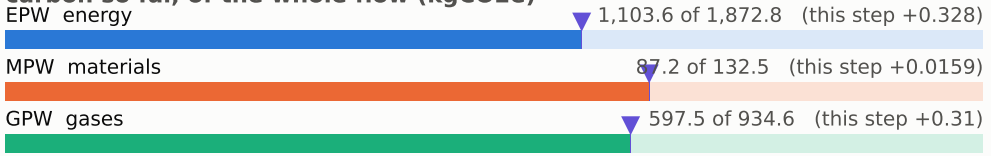

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

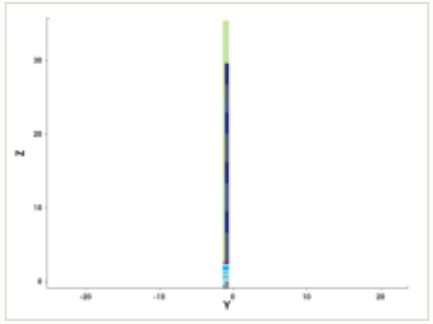

y cut at -1.035 µm

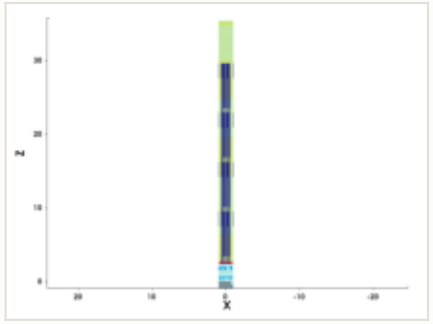

mask for this step

no mask for this step

steps by process area

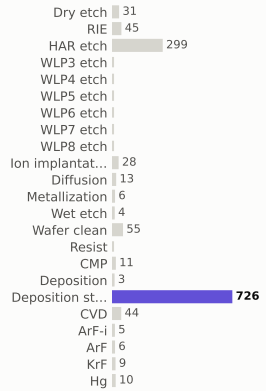

materials deposited (g)

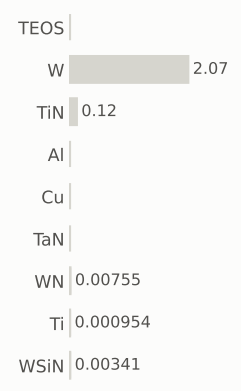

gases emitted (g)

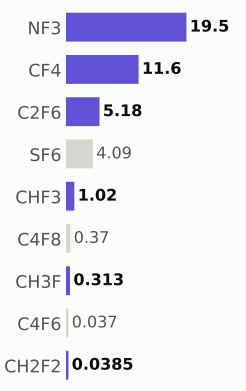

Step #17370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,789.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

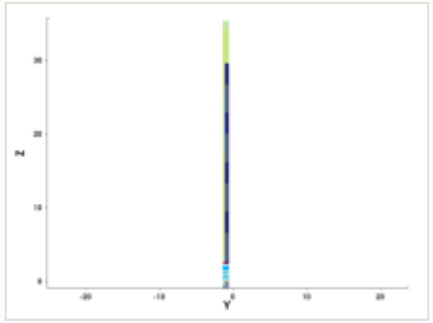

y cut at -1.035 µm

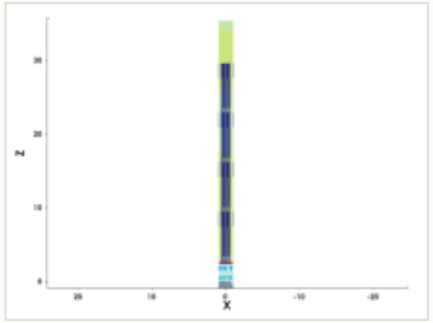

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

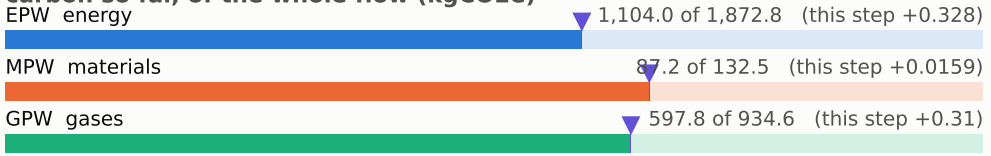

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

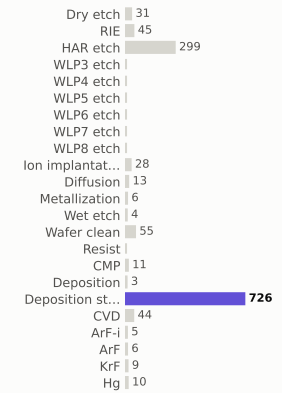

materials deposited (g)

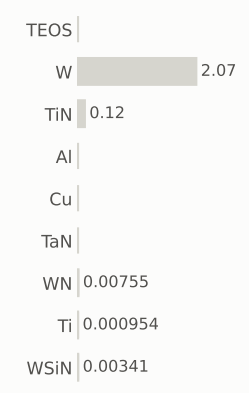

gases emitted (g)

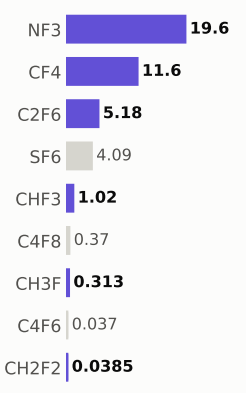

Step #17380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,789.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

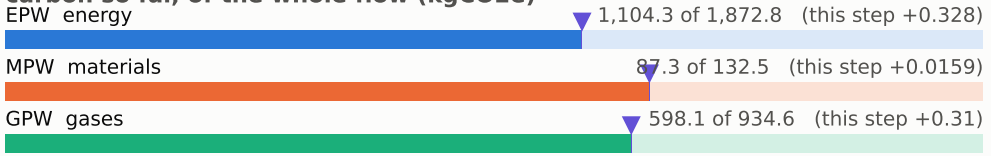

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

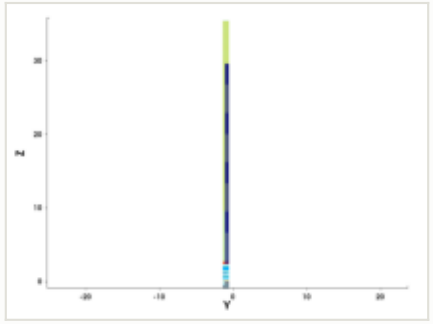

y cut at -1.035 µm

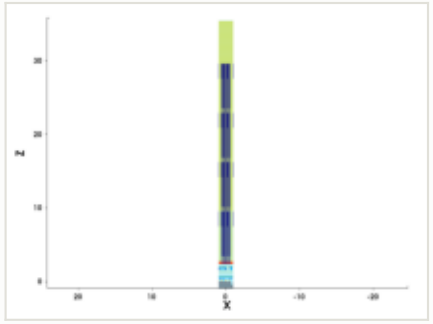

mask for this step

no mask for this step

steps by process area

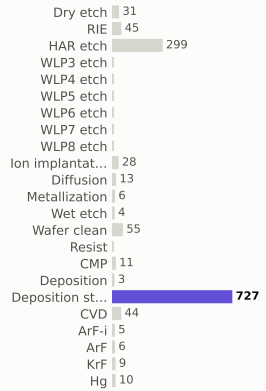

materials deposited (g)

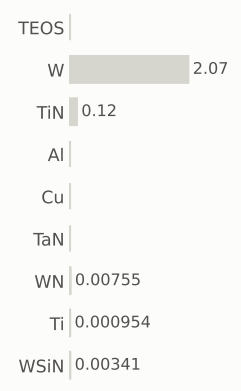

gases emitted (g)

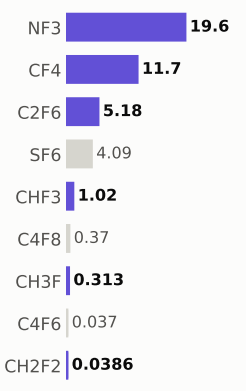

Step #17390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,790.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

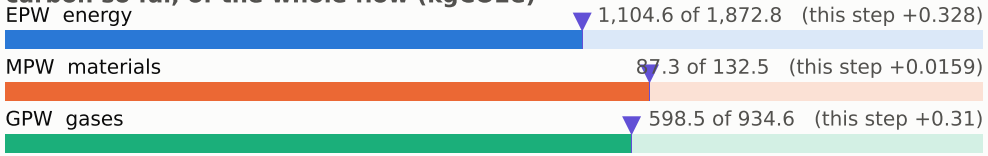

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

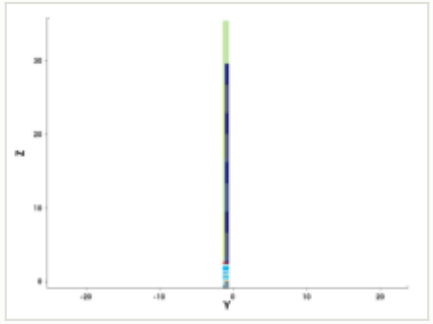

y cut at -1.035 µm

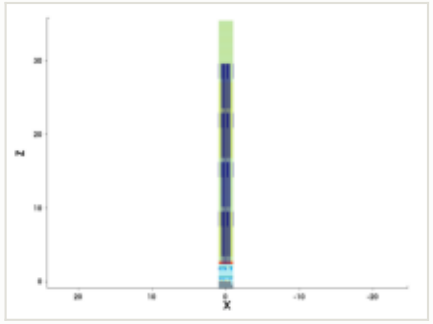

mask for this step

no mask for this step

steps by process area

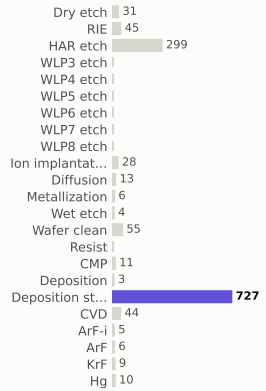

materials deposited (g)

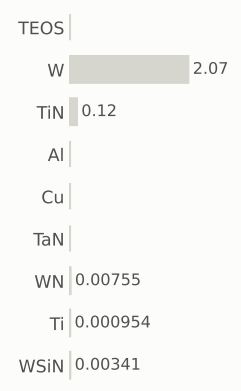

gases emitted (g)

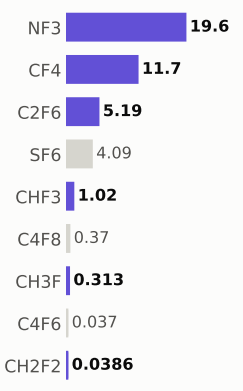

Step #17400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,791.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

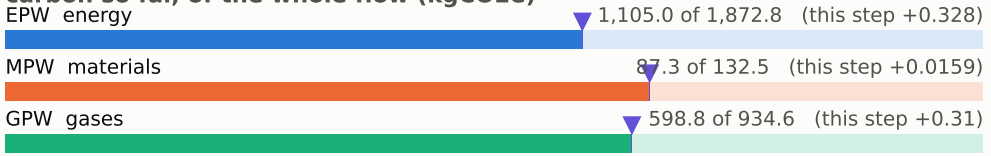

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

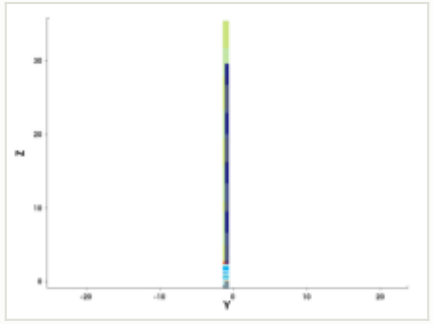

y cut at -1.035 µm

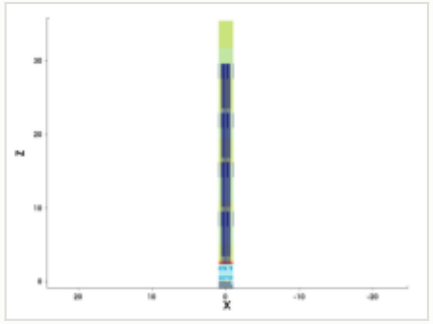

mask for this step

no mask for this step

steps by process area

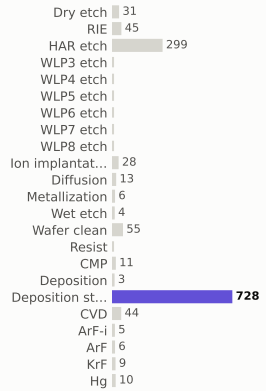

materials deposited (g)

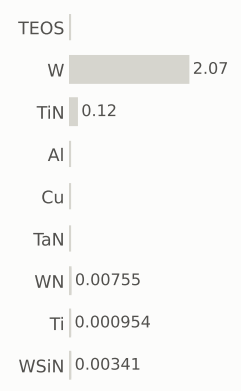

gases emitted (g)

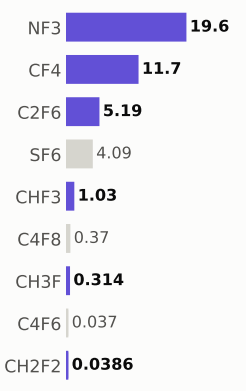

Step #17410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,791.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

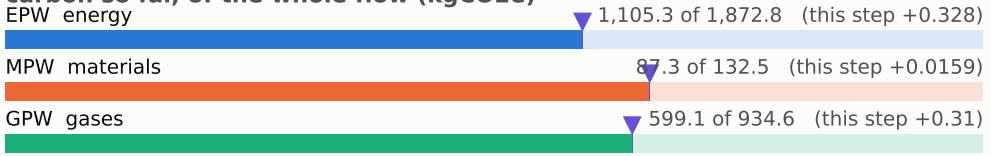

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

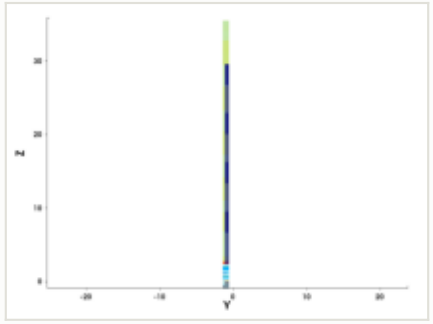

y cut at -1.035 µm

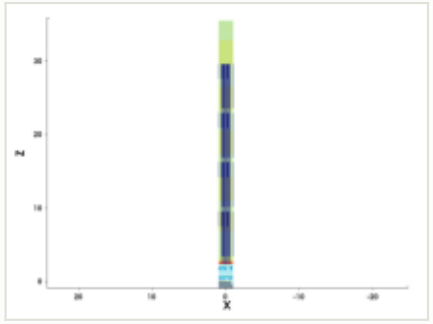

mask for this step

no mask for this step

steps by process area

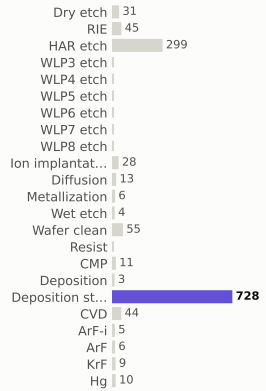

materials deposited (g)

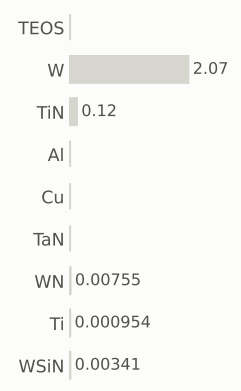

gases emitted (g)

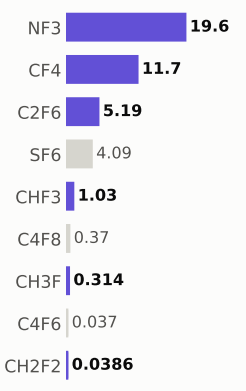

Step #17420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,792.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

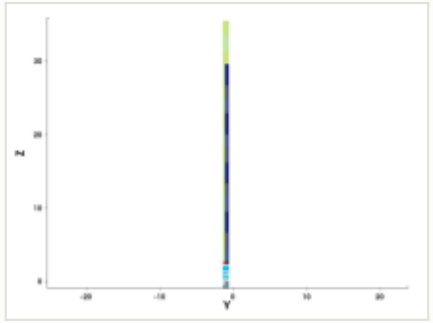

y cut at -1.035 µm

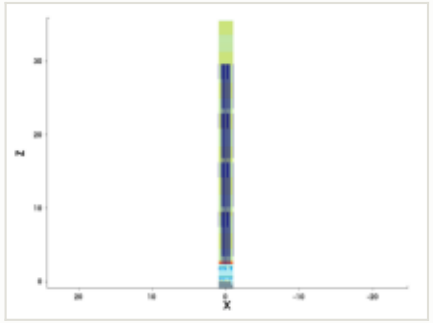

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

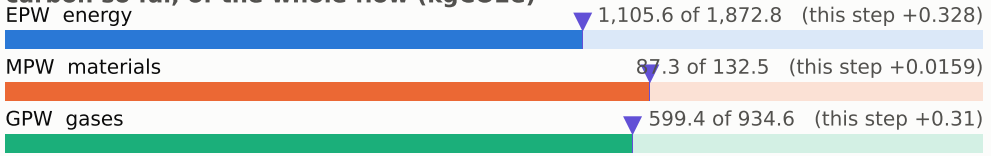

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

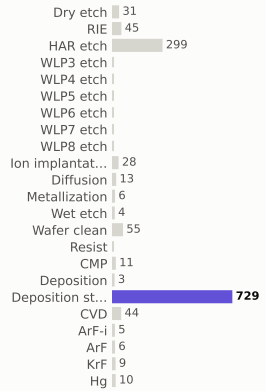

materials deposited (g)

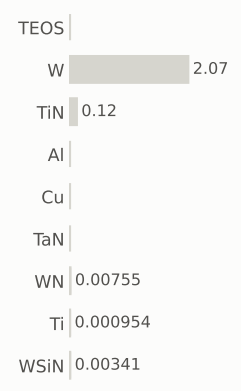

gases emitted (g)

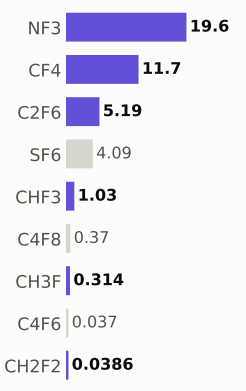

Step #17430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,793.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

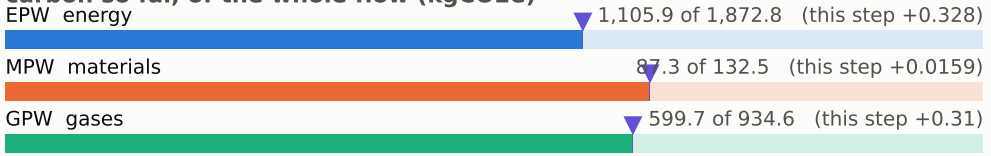

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

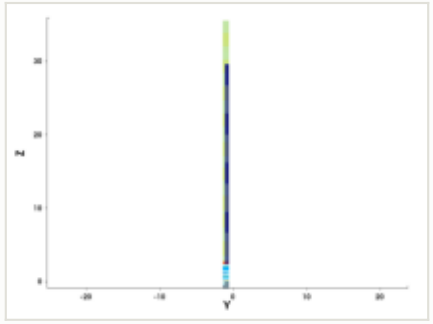

y cut at -1.035 µm

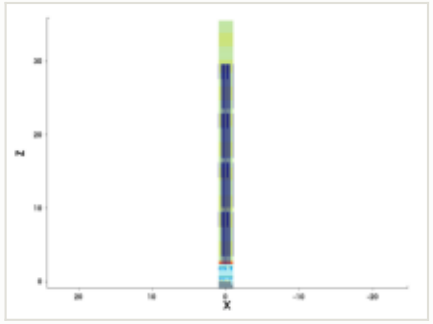

mask for this step

no mask for this step

steps by process area

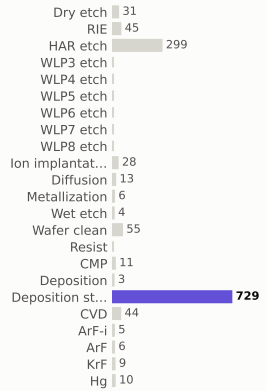

materials deposited (g)

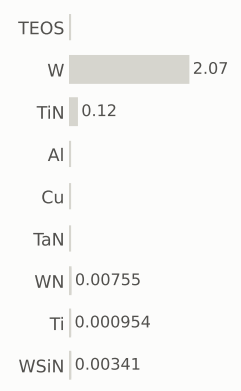

gases emitted (g)

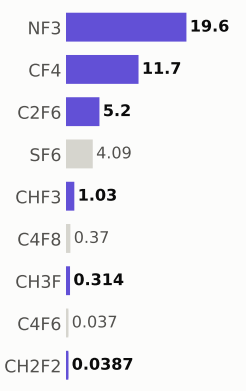

Step #17440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,793.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

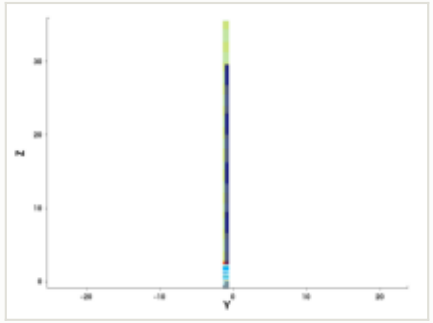

y cut at -1.035 µm

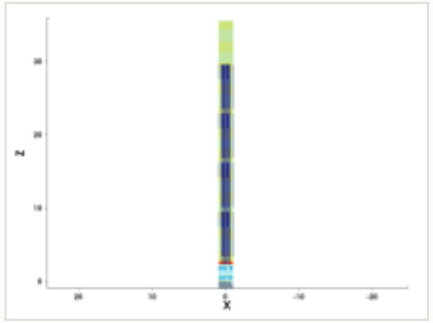

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

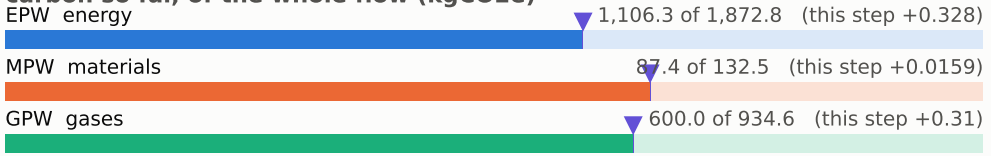

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

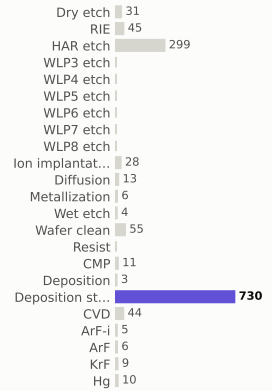

materials deposited (g)

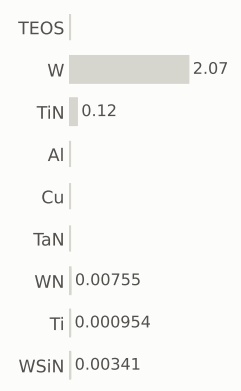

gases emitted (g)

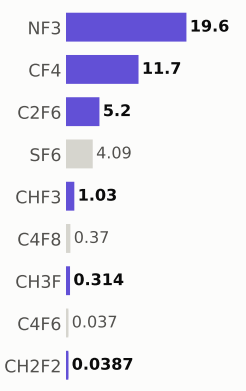

Step #17450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,794.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

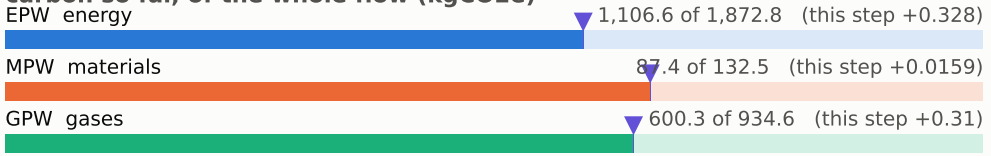

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

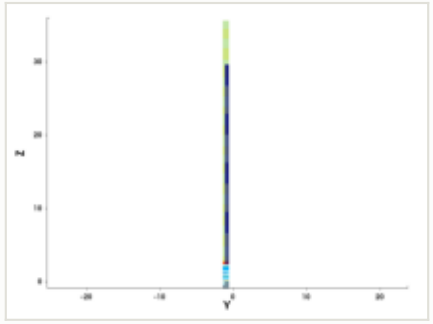

y cut at -1.035 µm

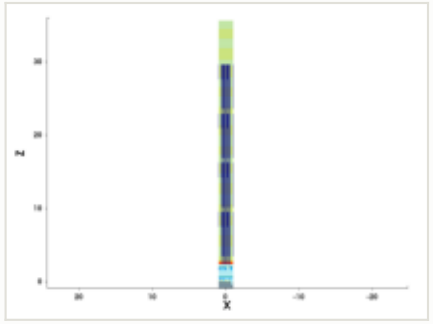

mask for this step

no mask for this step

steps by process area

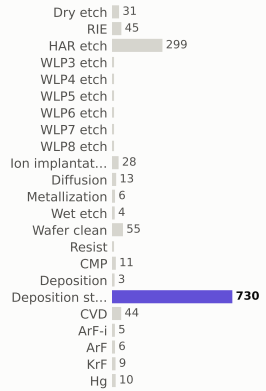

materials deposited (g)

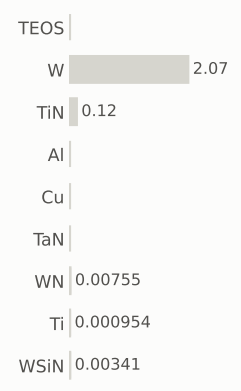

gases emitted (g)

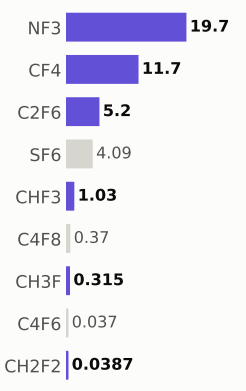

Step #17460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,794.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

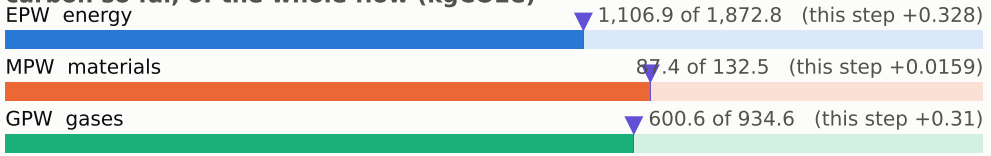

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

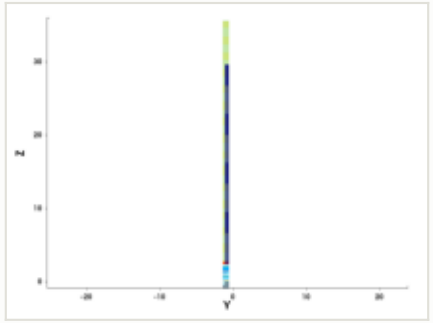

y cut at -1.035 µm

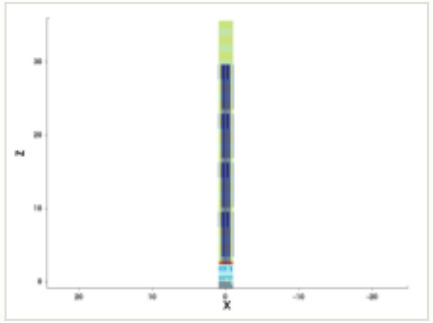

mask for this step

no mask for this step

steps by process area

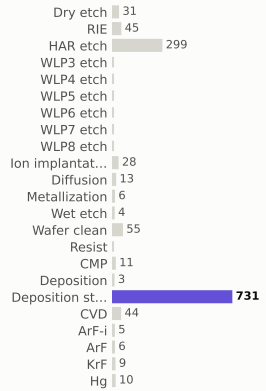

materials deposited (g)

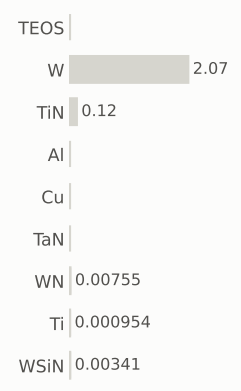

gases emitted (g)

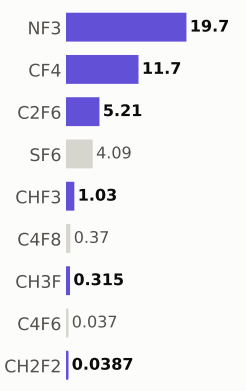

Step #17470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,795.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

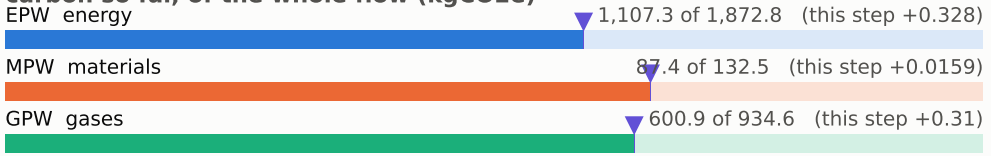

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

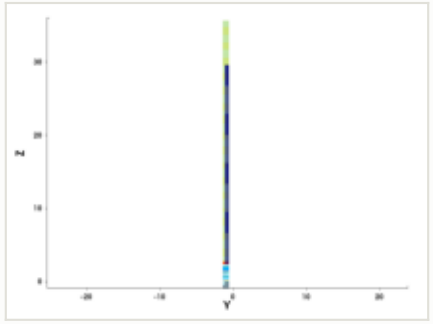

y cut at -1.035 µm

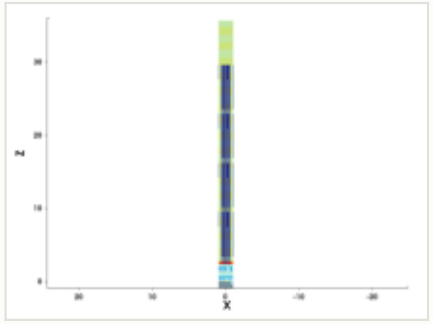

mask for this step

no mask for this step

steps by process area

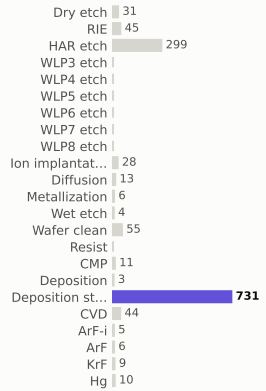

materials deposited (g)

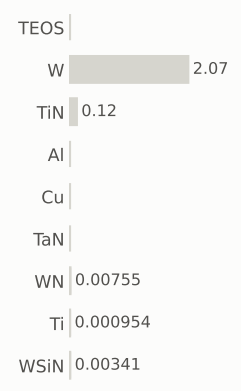

gases emitted (g)

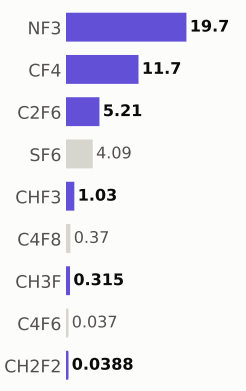

Step #17480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,796.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

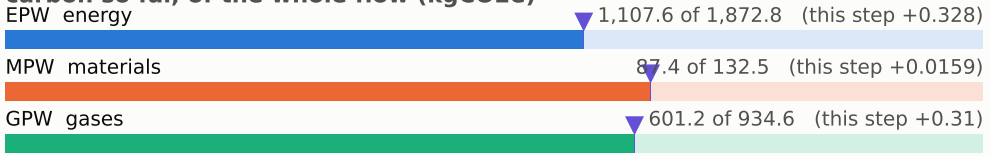

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

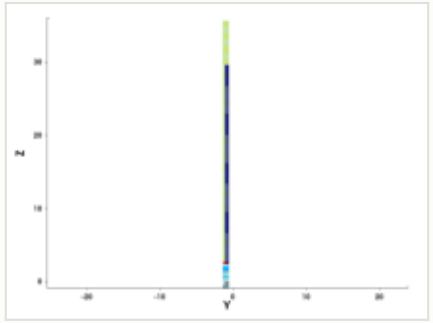

y cut at -1.035 µm

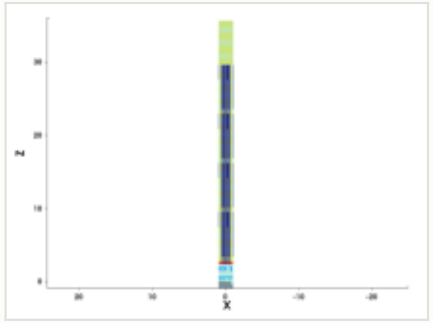

mask for this step

no mask for this step

steps by process area

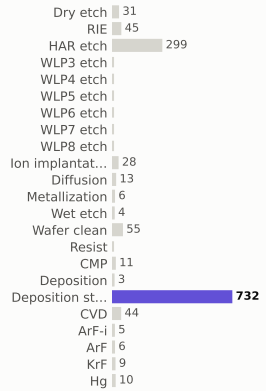

materials deposited (g)

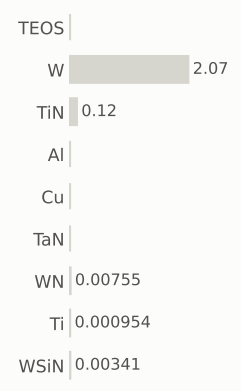

gases emitted (g)

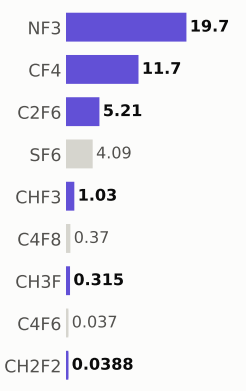

Step #17490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,796.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

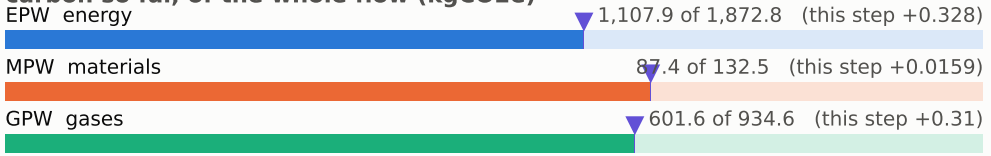

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

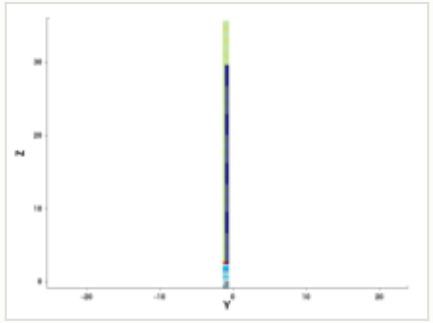

y cut at -1.035 µm

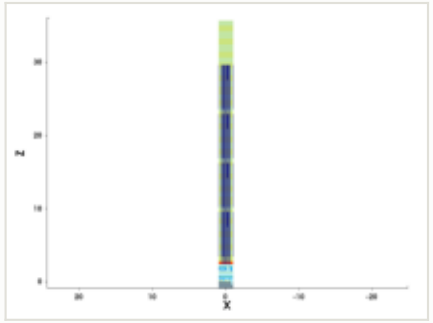

mask for this step

no mask for this step

steps by process area

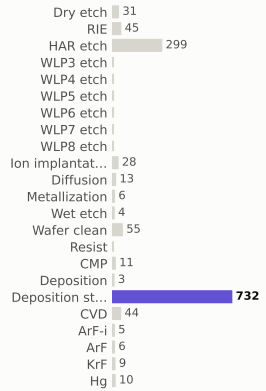

materials deposited (g)

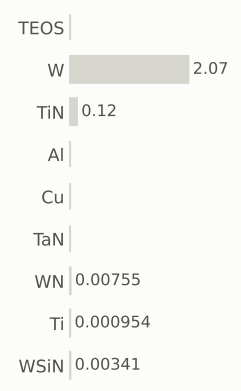

gases emitted (g)

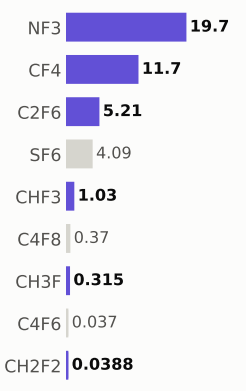

Step #17500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,797.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

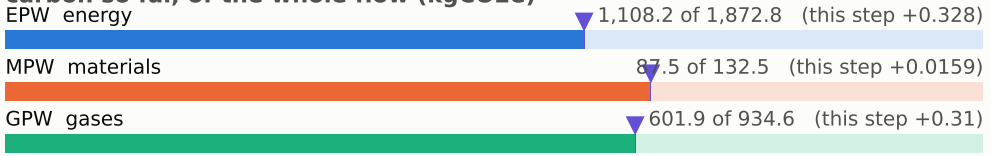

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

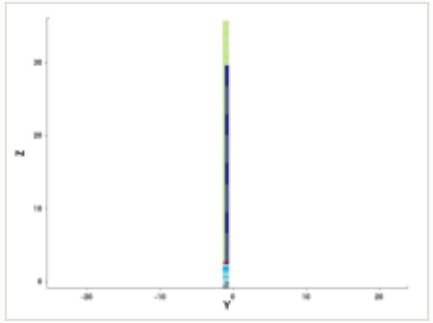

y cut at -1.035 µm

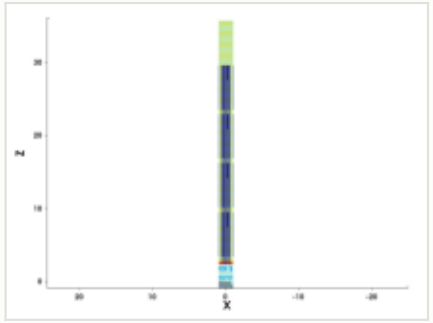

mask for this step

no mask for this step

steps by process area

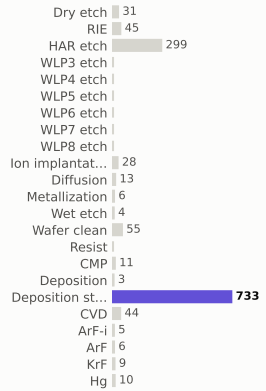

materials deposited (g)

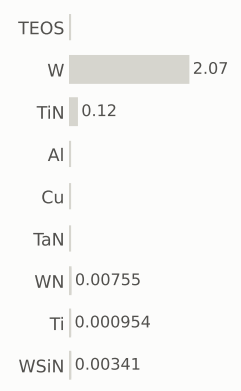

gases emitted (g)

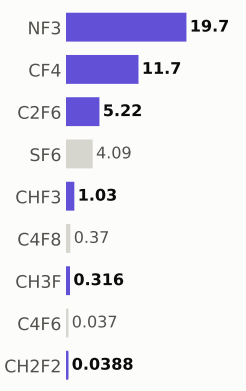

Step #17510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,798.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

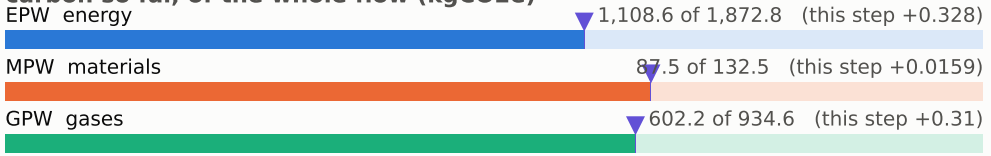

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

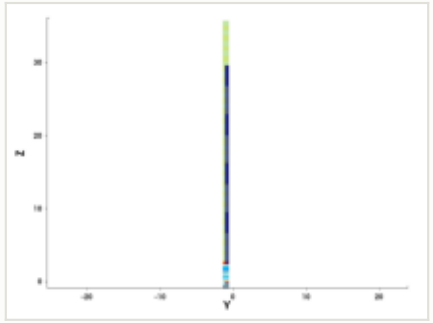

y cut at -1.035 µm

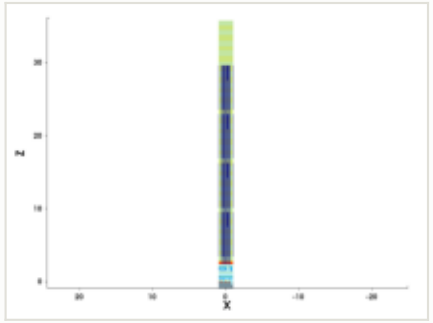

mask for this step

no mask for this step

steps by process area

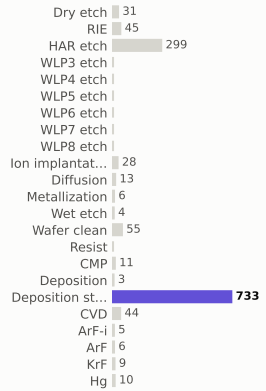

materials deposited (g)

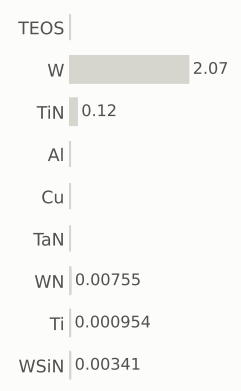

gases emitted (g)

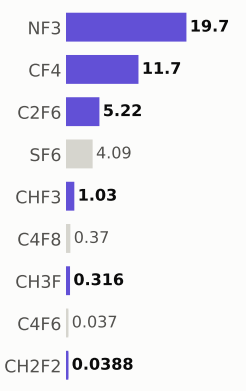

Step #17520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,798.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

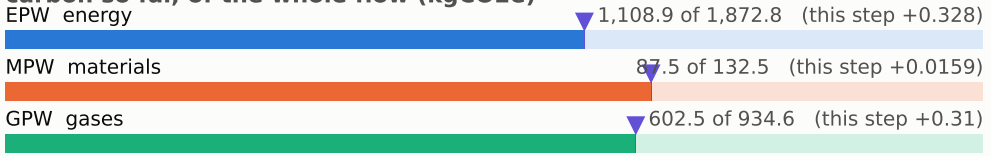

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

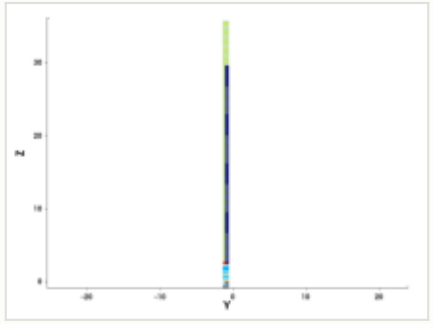

y cut at -1.035 µm

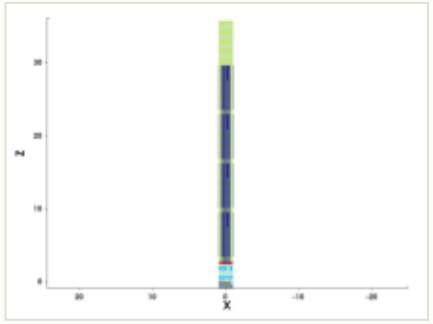

mask for this step

no mask for this step

steps by process area

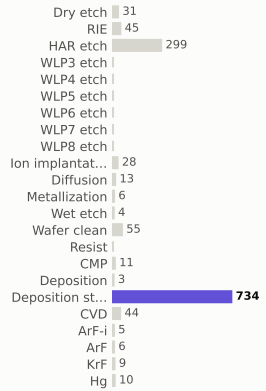

materials deposited (g)

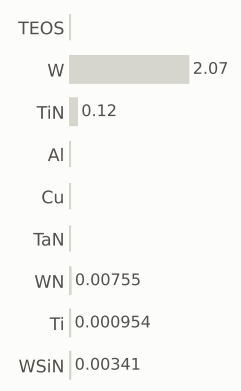

gases emitted (g)

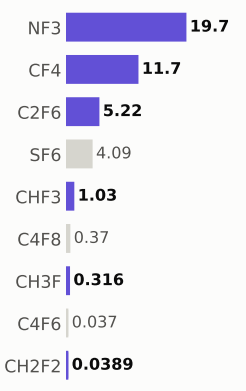

Step #17530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,799.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

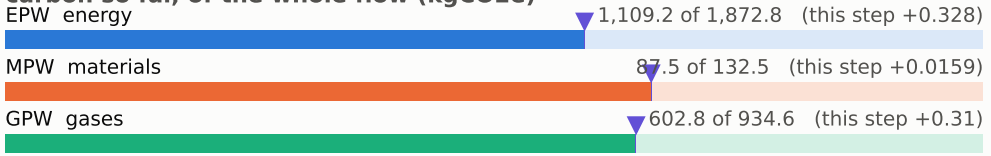

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

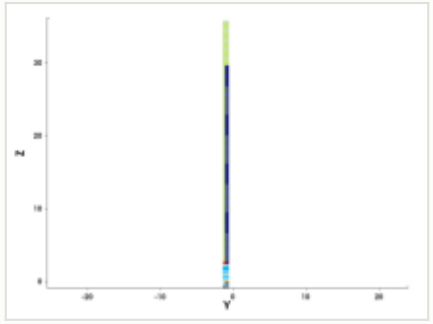

y cut at -1.035 µm

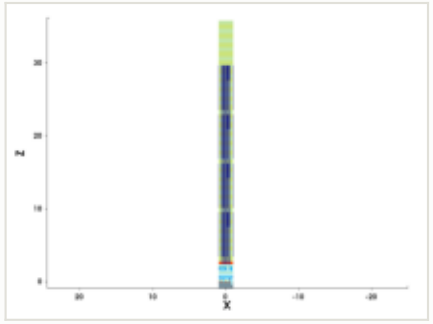

mask for this step

no mask for this step

steps by process area

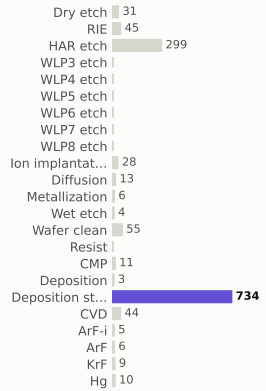

materials deposited (g)

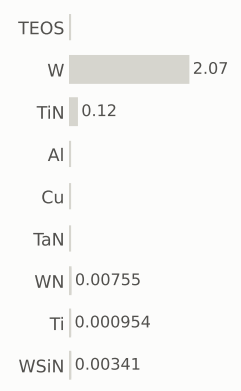

gases emitted (g)

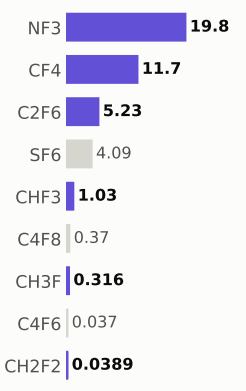

Step #17540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,800.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

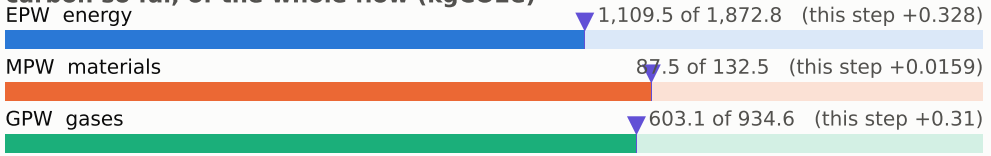

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

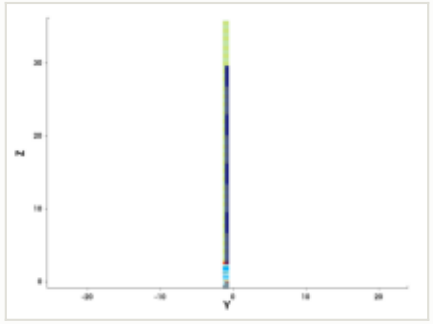

y cut at -1.035 µm

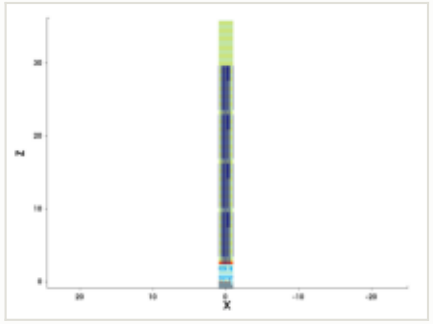

mask for this step

no mask for this step

steps by process area

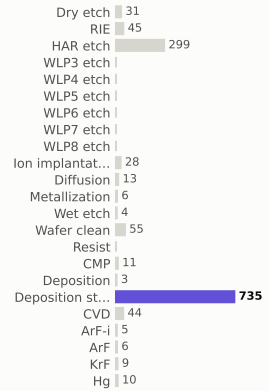

materials deposited (g)

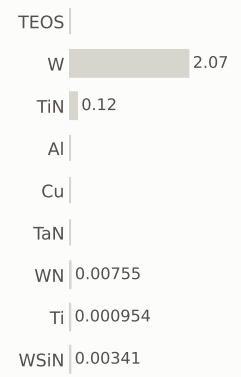

gases emitted (g)

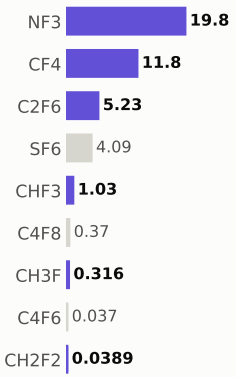

Step #17550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,800.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

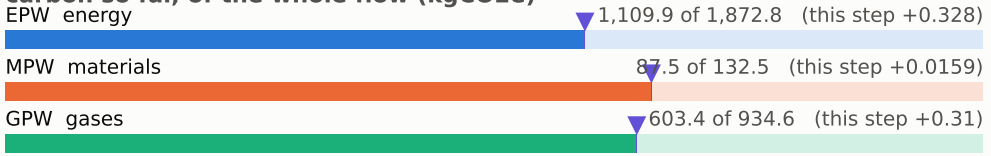

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

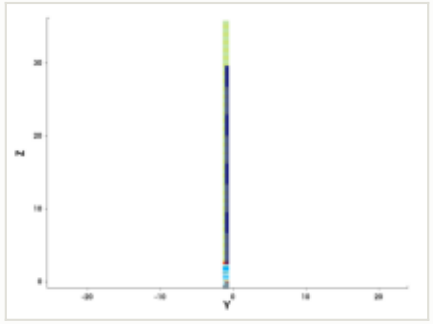

y cut at -1.035 µm

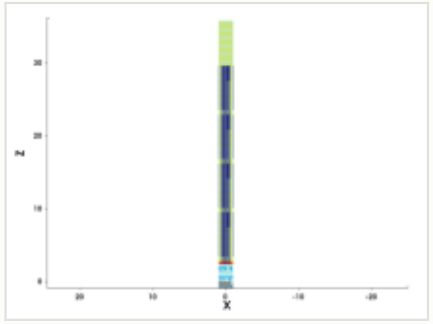

mask for this step

no mask for this step

steps by process area

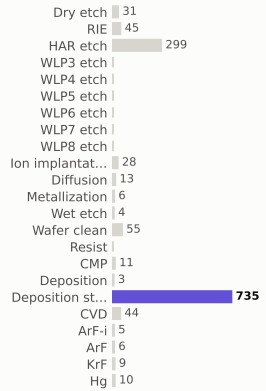

materials deposited (g)

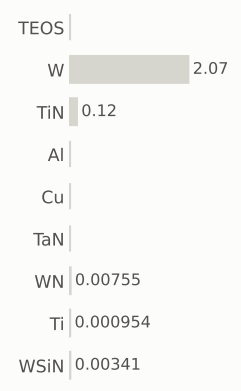

gases emitted (g)

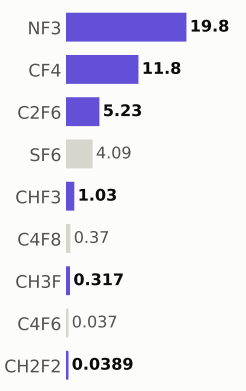

Step #17560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,801.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

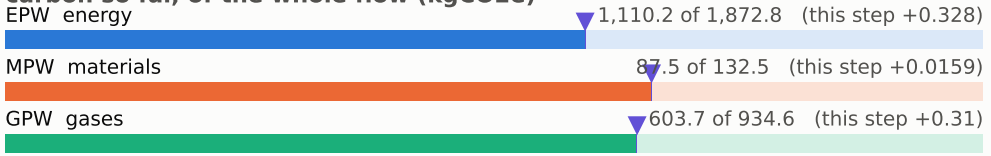

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

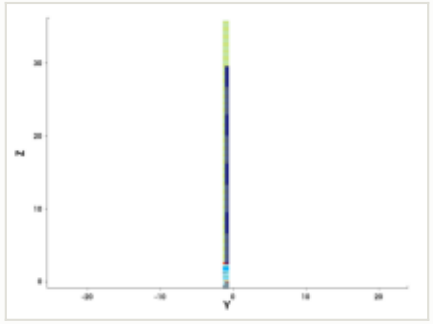

y cut at -1.035 µm

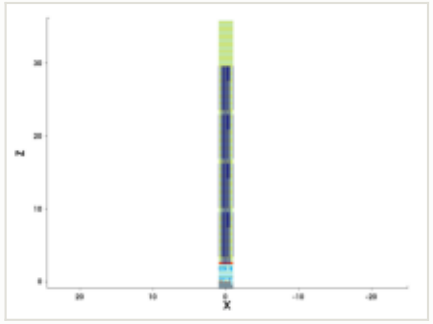

mask for this step

no mask for this step

steps by process area

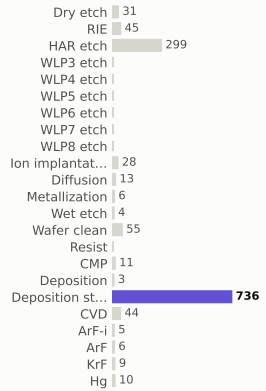

materials deposited (g)

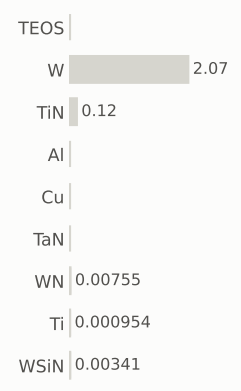

gases emitted (g)

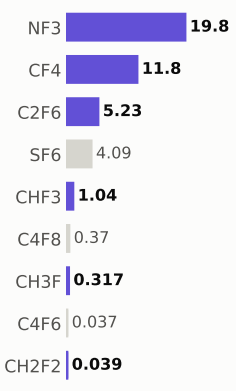

Step #17570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,802.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

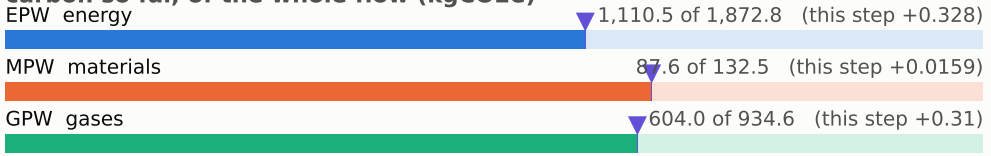

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

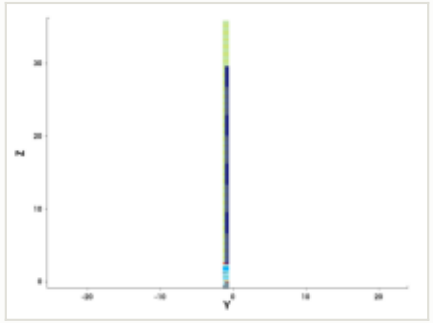

y cut at -1.035 µm

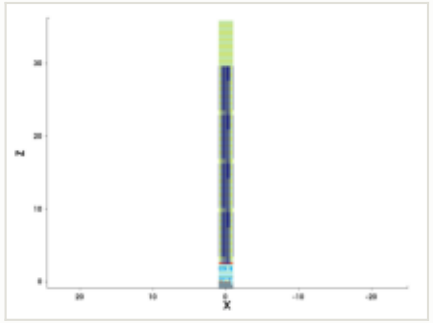

mask for this step

no mask for this step

steps by process area

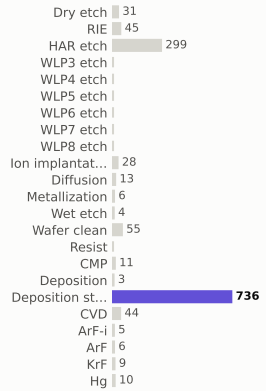

materials deposited (g)

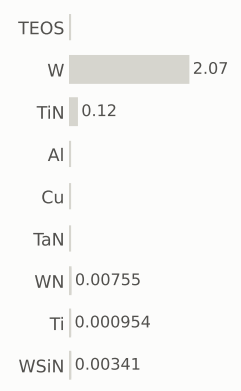

gases emitted (g)

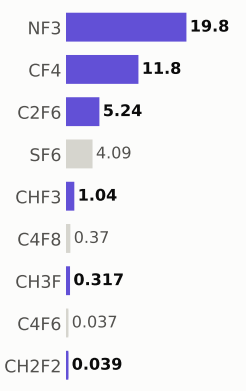

Step #17580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,802.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

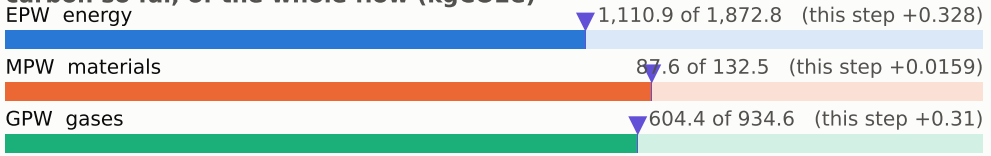

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

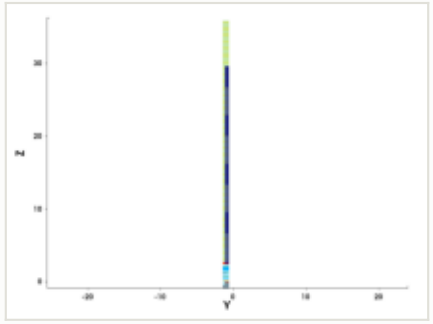

y cut at -1.035 µm

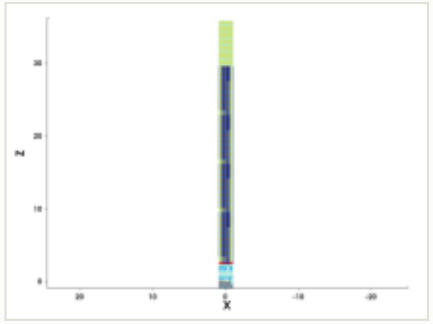

mask for this step

no mask for this step

steps by process area

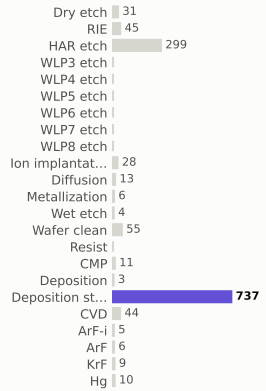

materials deposited (g)

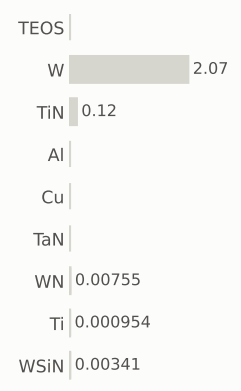

gases emitted (g)

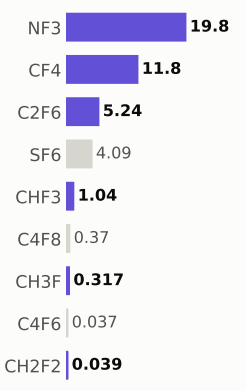

Step #17590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,803.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

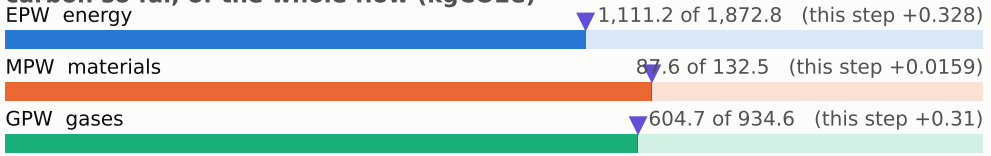

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

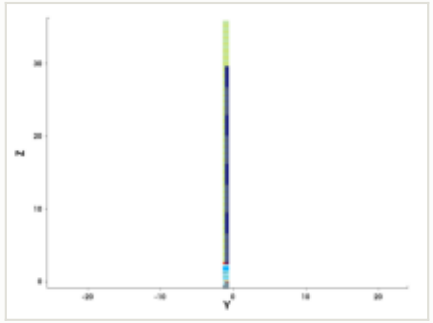

y cut at -1.035 µm

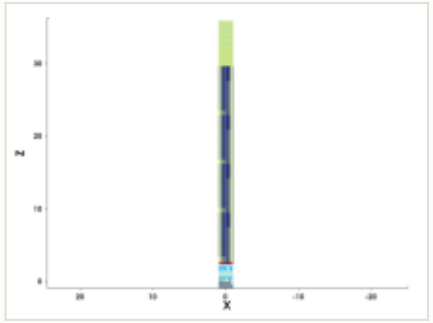

mask for this step

no mask for this step

steps by process area

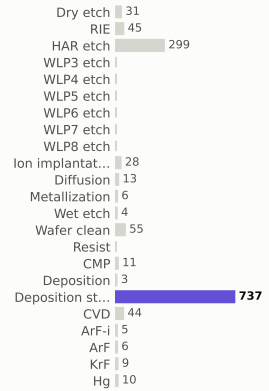

materials deposited (g)

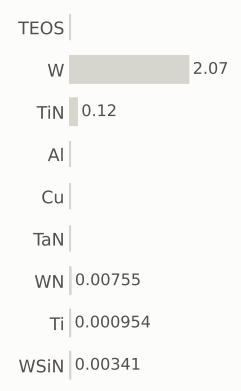

gases emitted (g)

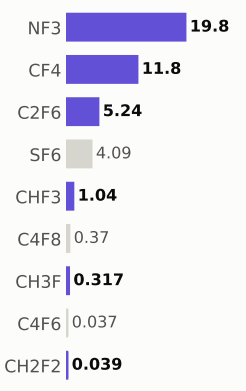

Step #17600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,804.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

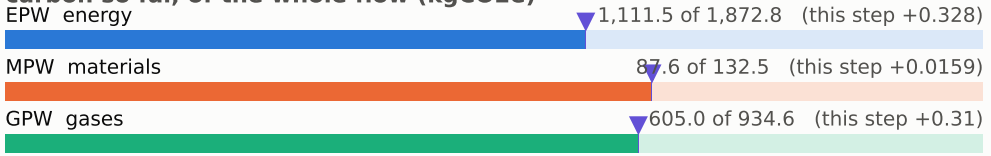

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

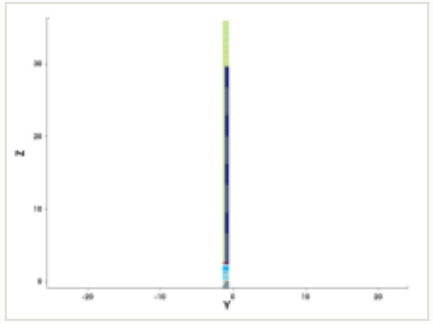

y cut at -1.035 µm

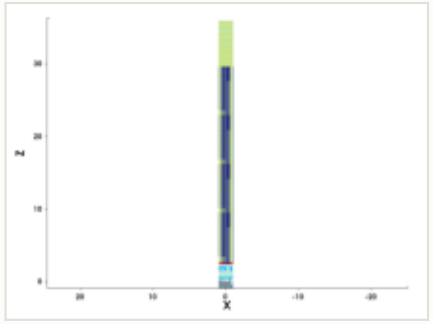

mask for this step

no mask for this step

steps by process area

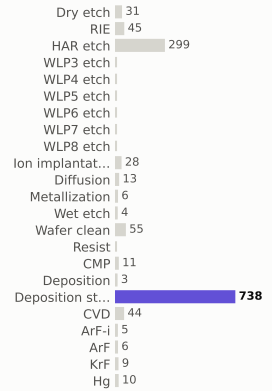

materials deposited (g)

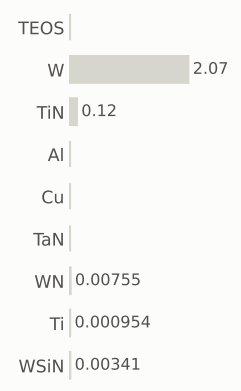

gases emitted (g)

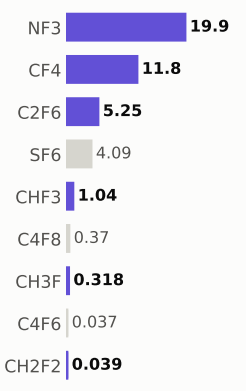

Step #17610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,804.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

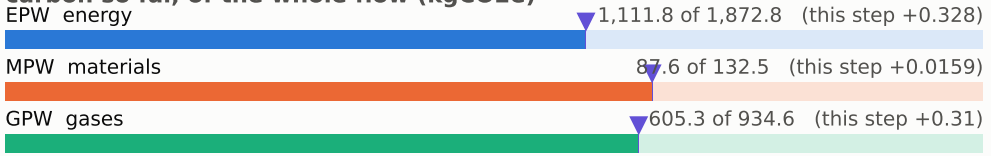

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

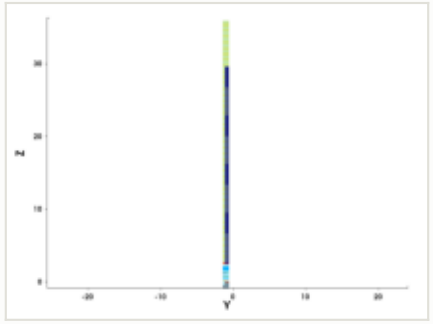

y cut at -1.035 µm

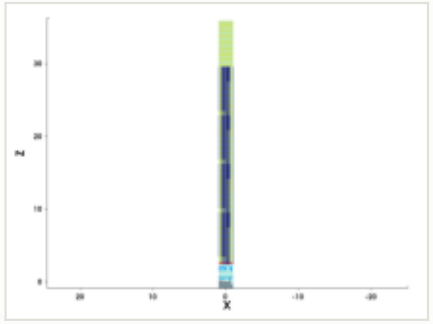

mask for this step

no mask for this step

steps by process area

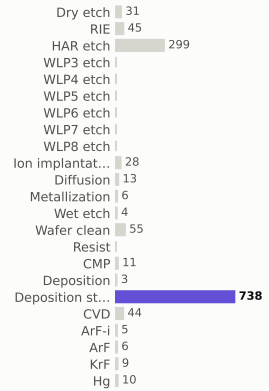

materials deposited (g)

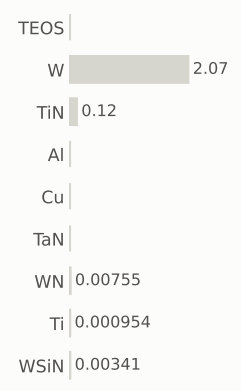

gases emitted (g)

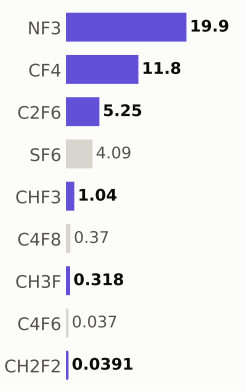

Step #17620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,805.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

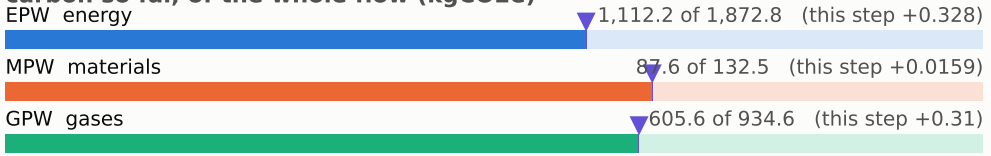

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

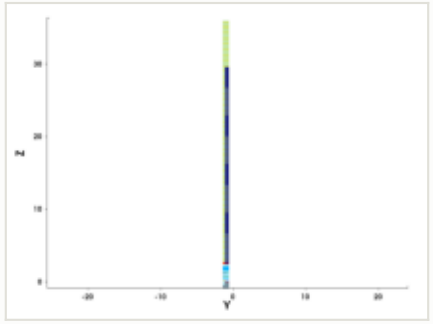

y cut at -1.035 µm

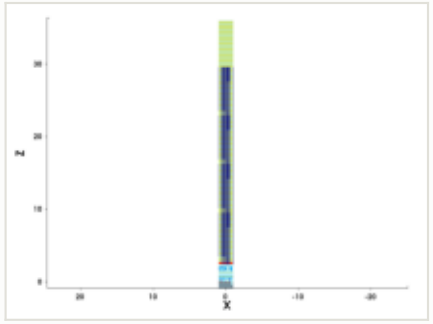

mask for this step

no mask for this step

steps by process area

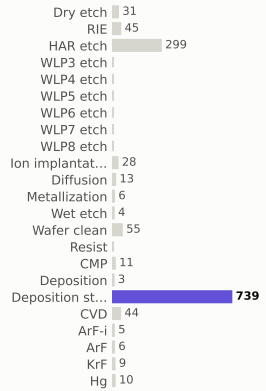

materials deposited (g)

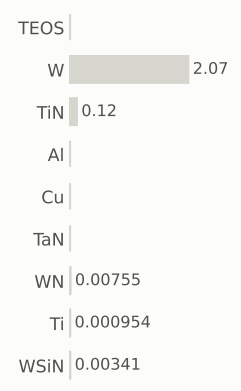

gases emitted (g)

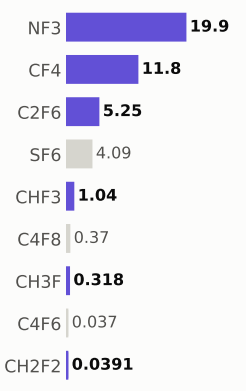

Step #17630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,806.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

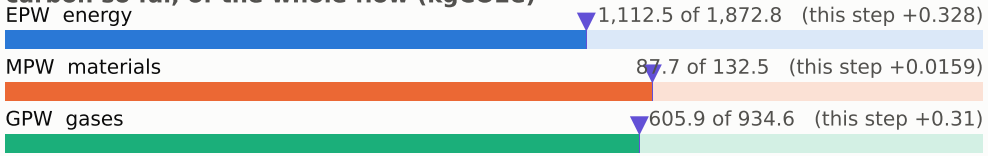

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

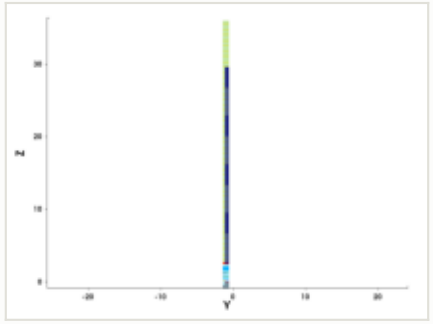

y cut at -1.035 µm

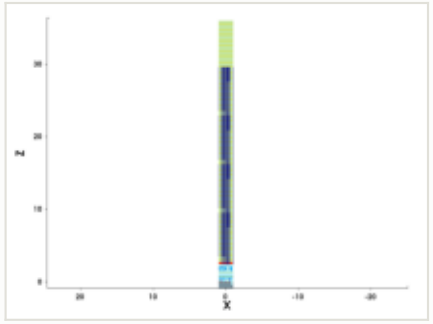

mask for this step

no mask for this step

steps by process area

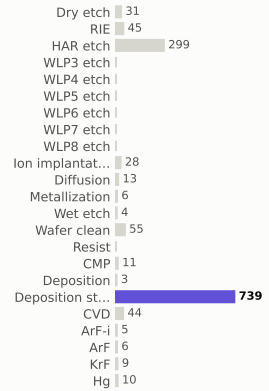

materials deposited (g)

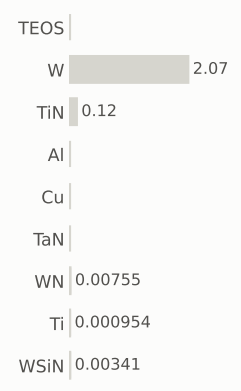

gases emitted (g)

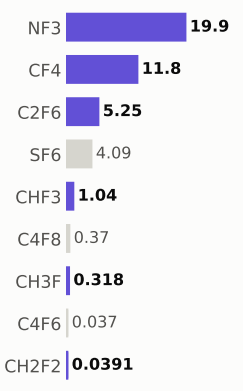

Step #17640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,806.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

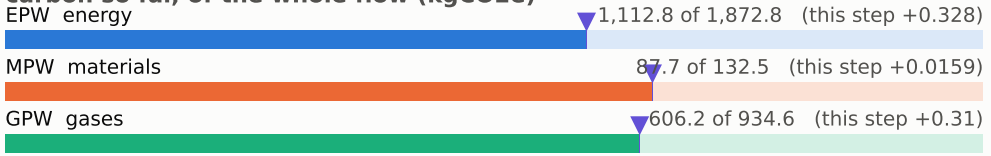

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

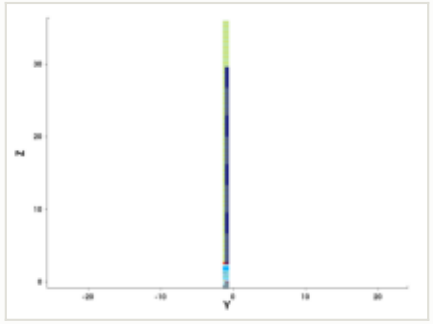

y cut at -1.035 µm

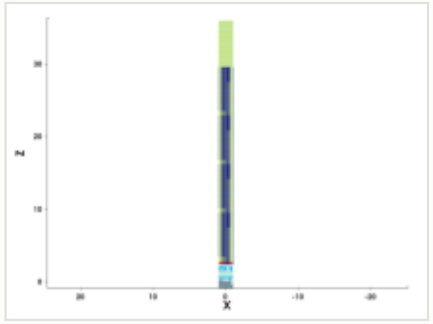

mask for this step

no mask for this step

steps by process area

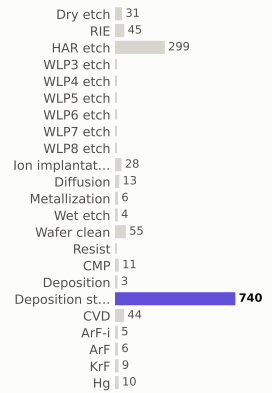

materials deposited (g)

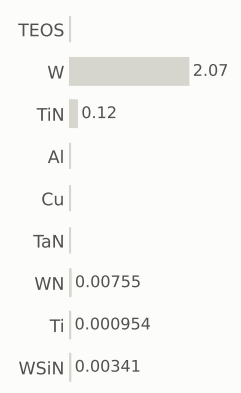

gases emitted (g)

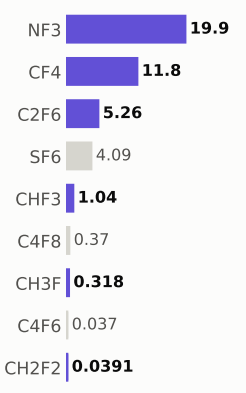

Step #17650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,807.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

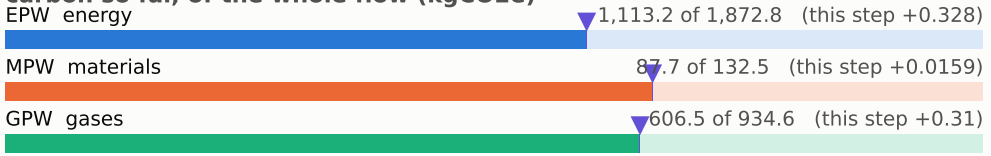

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

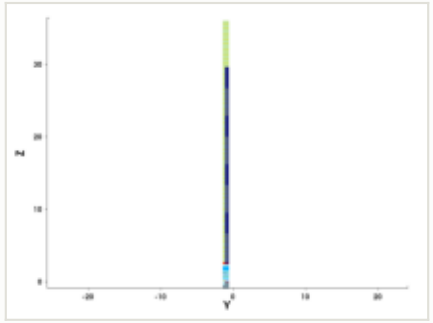

y cut at -1.035 µm

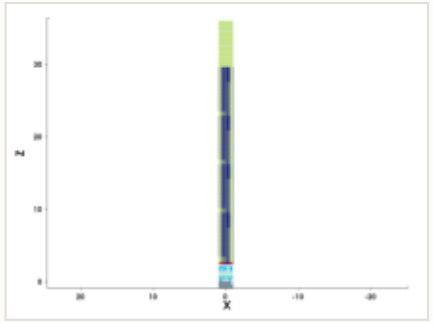

mask for this step

no mask for this step

steps by process area

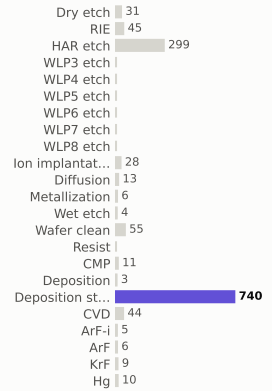

materials deposited (g)

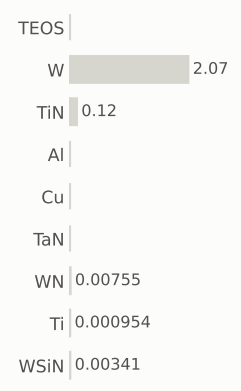

gases emitted (g)

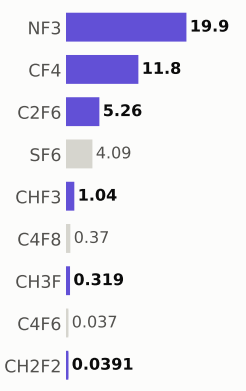

Step #17660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,808.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

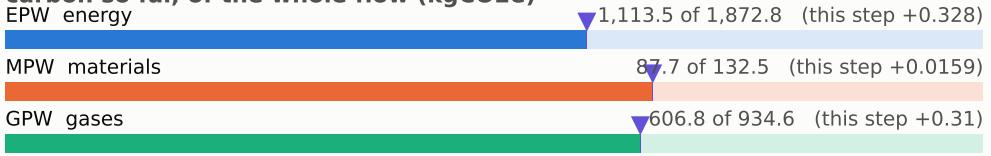

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

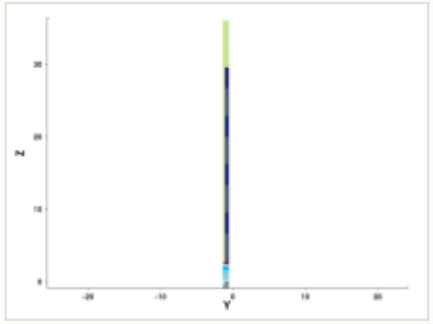

y cut at -1.035 µm

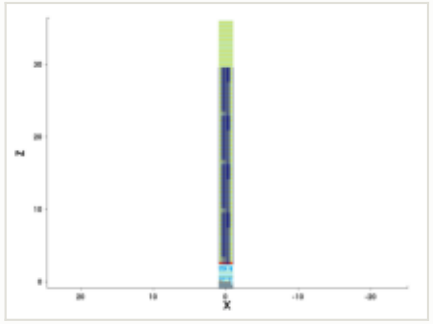

mask for this step

no mask for this step

steps by process area

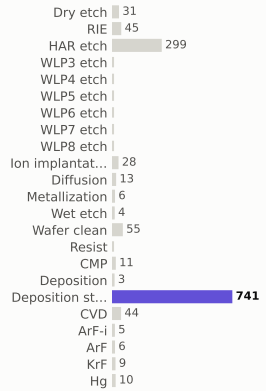

materials deposited (g)

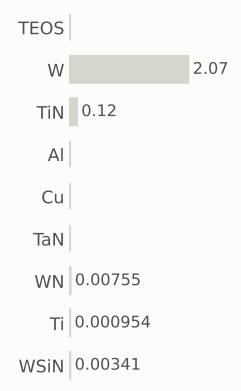

gases emitted (g)

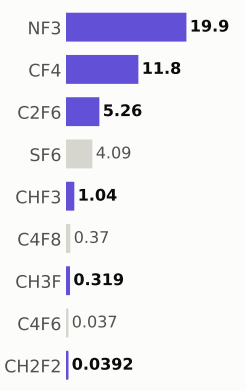

Step #17670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,808.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

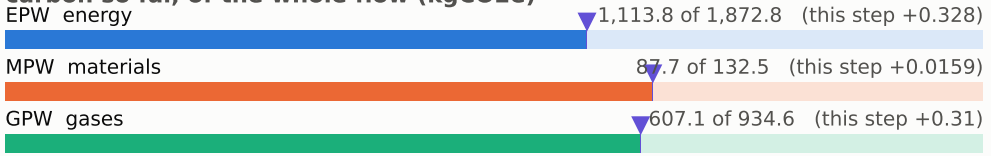

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

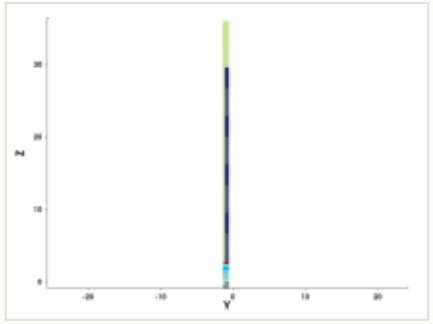

y cut at -1.035 µm

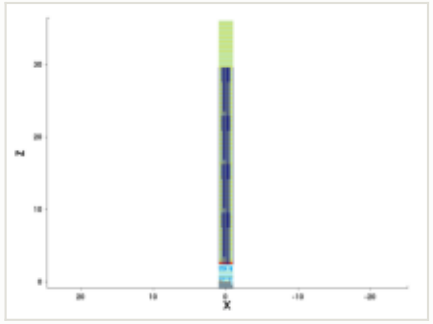

mask for this step

no mask for this step

steps by process area

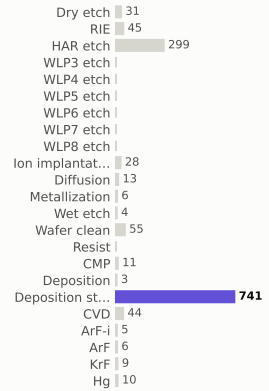

materials deposited (g)

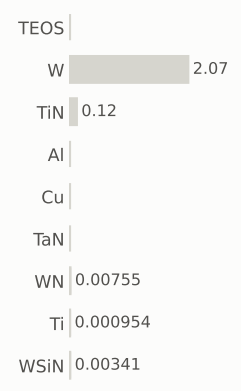

gases emitted (g)

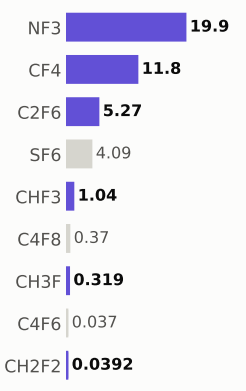

Step #17680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,809.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

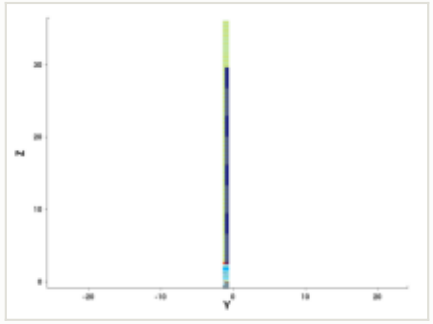

y cut at -1.035 µm

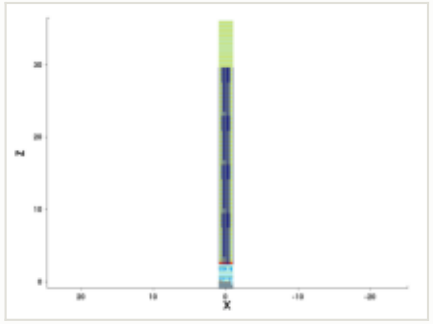

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

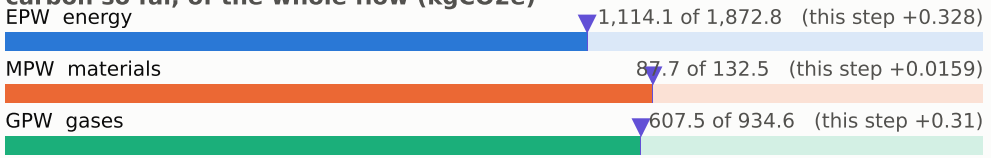

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

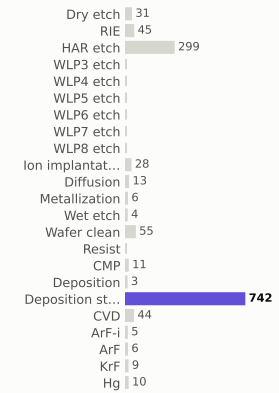

materials deposited (g)

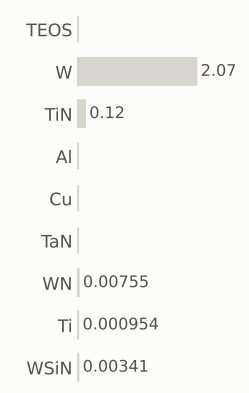

gases emitted (g)



Step #17690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,810.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

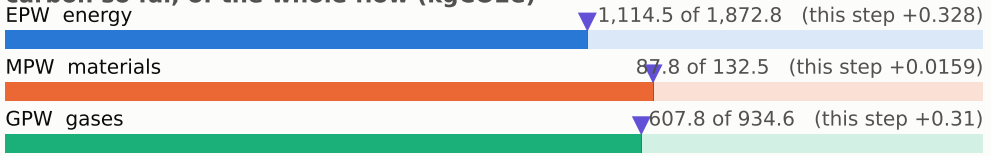

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

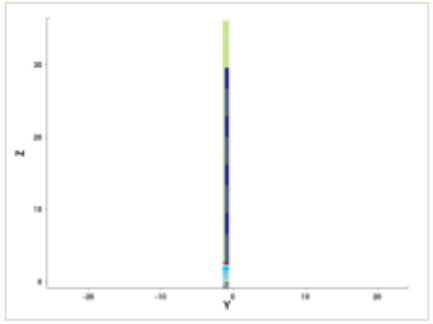

y cut at -1.035 µm

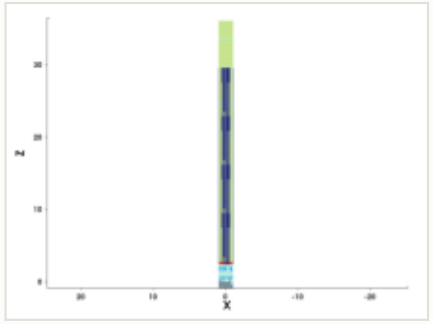

mask for this step

no mask for this step

steps by process area

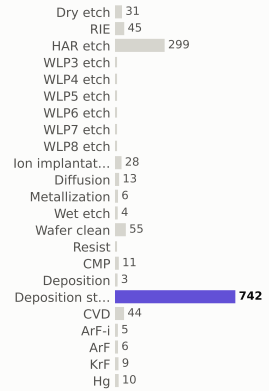

materials deposited (g)

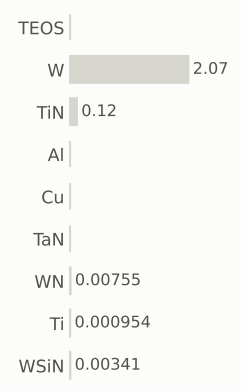

gases emitted (g)

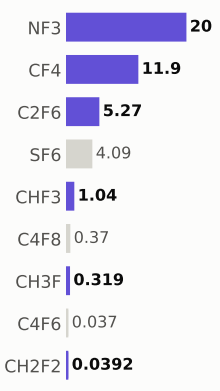

Step #17700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,810.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

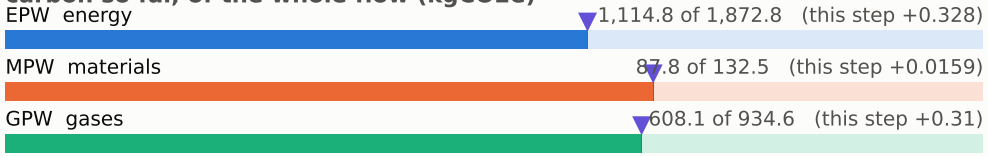

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

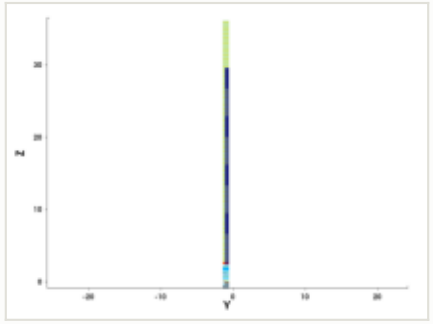

y cut at -1.035 µm

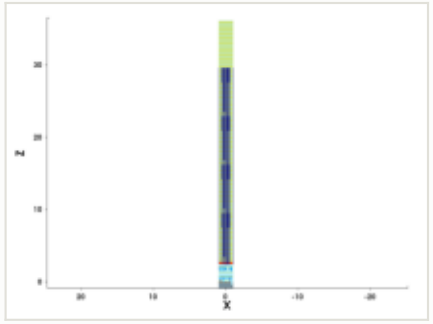

mask for this step

no mask for this step

steps by process area

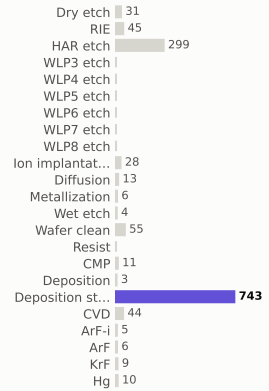

materials deposited (g)

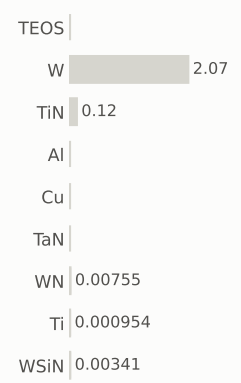

gases emitted (g)

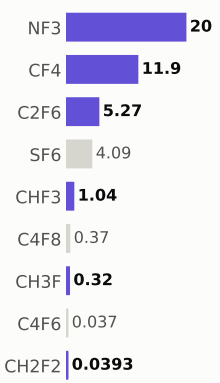

Step #17710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,811.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

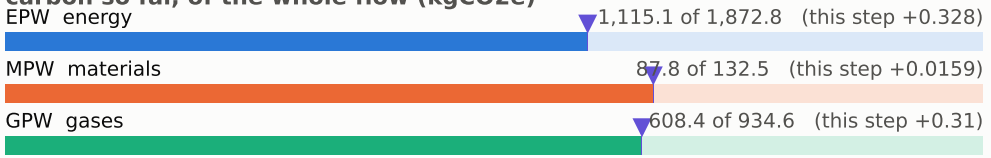

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

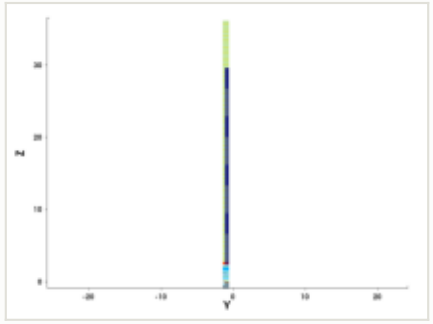

y cut at -1.035 µm

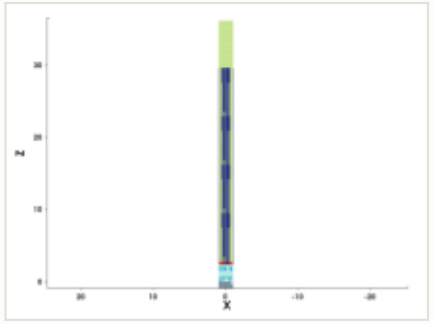

mask for this step

no mask for this step

steps by process area

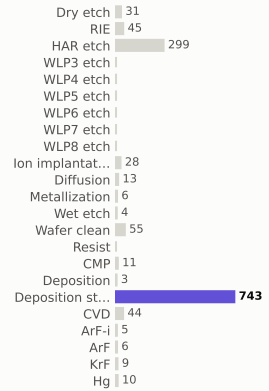

materials deposited (g)

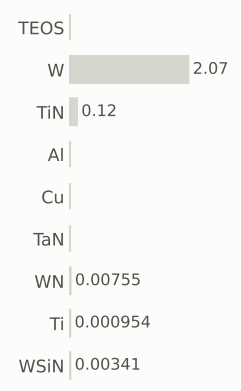

gases emitted (g)

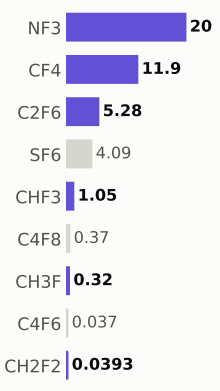

Step #17720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,812.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

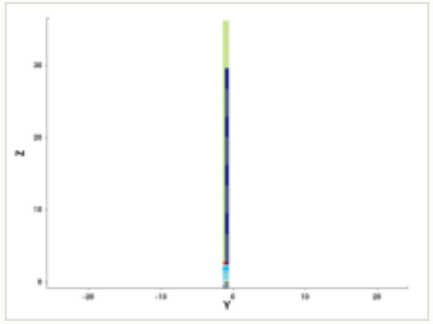

y cut at -1.035 µm

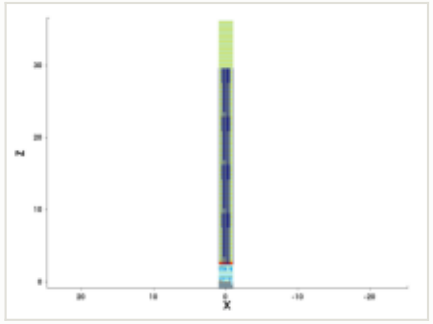

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

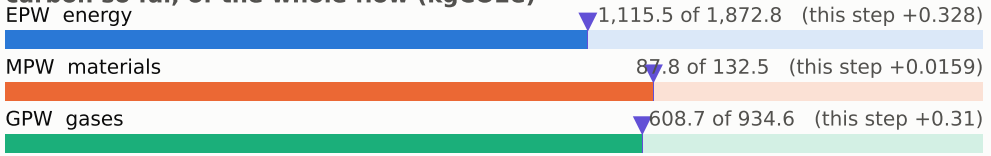

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

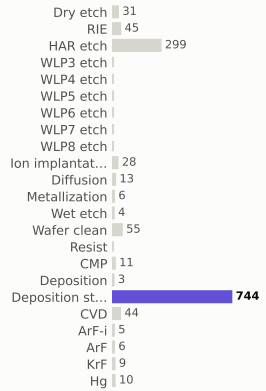

materials deposited (g)

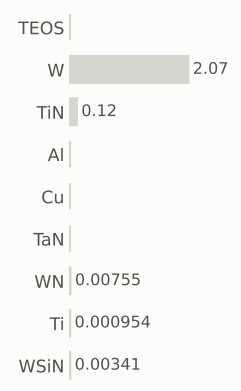

gases emitted (g)

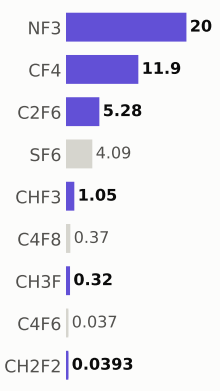

Step #17730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,812.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

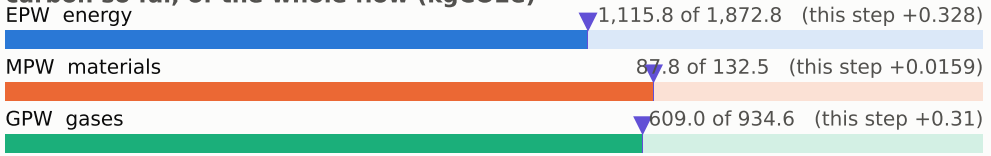

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

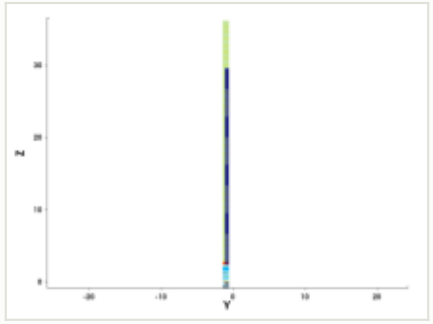

y cut at -1.035 µm

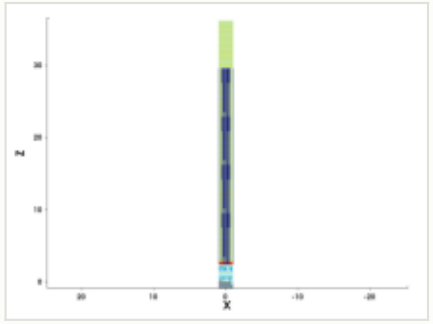

mask for this step

no mask for this step

steps by process area

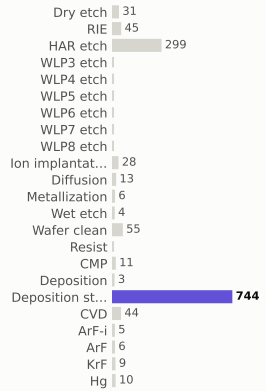

materials deposited (g)

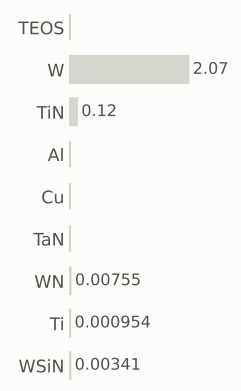

gases emitted (g)

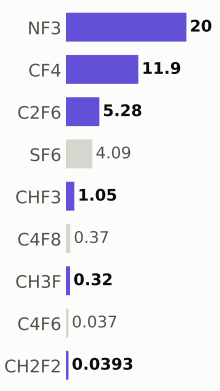

Step #17740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,813.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

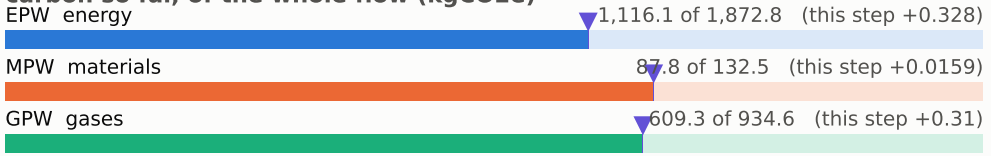

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

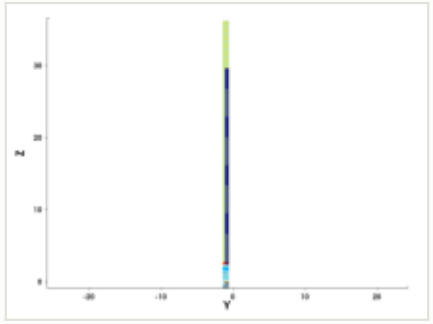

y cut at -1.035 µm

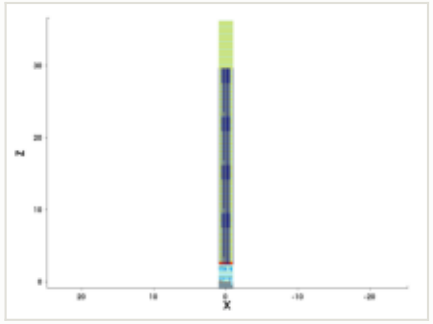

mask for this step

no mask for this step

steps by process area

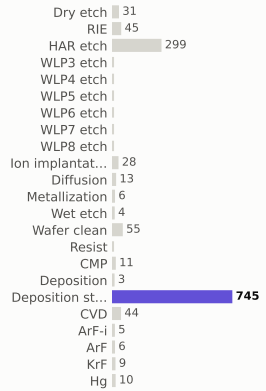

materials deposited (g)

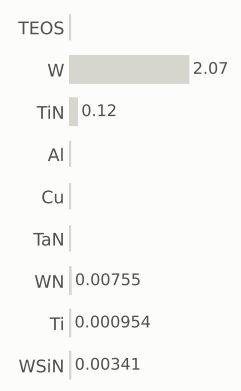

gases emitted (g)

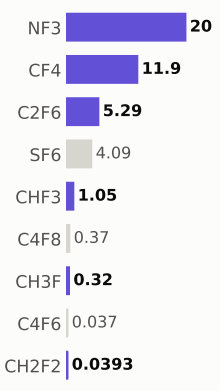

Step #17750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,813.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

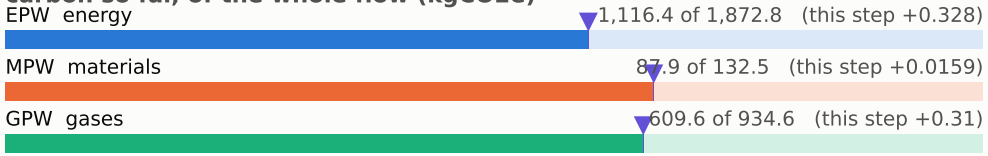

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

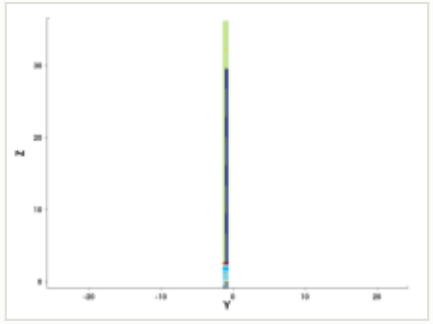

y cut at -1.035 µm

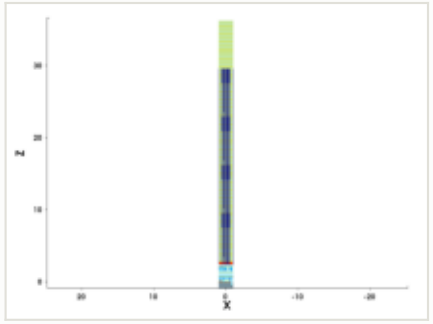

mask for this step

no mask for this step

steps by process area

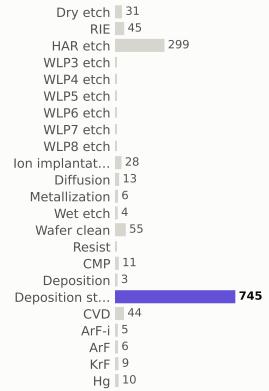

materials deposited (g)

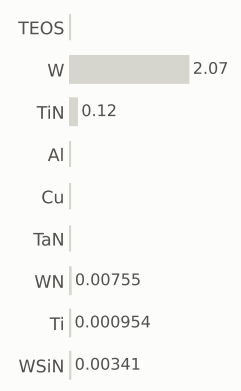

gases emitted (g)

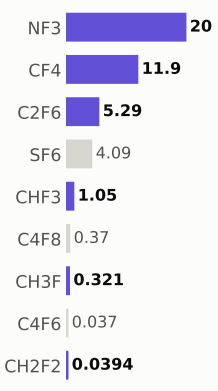

Step #17760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,814.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

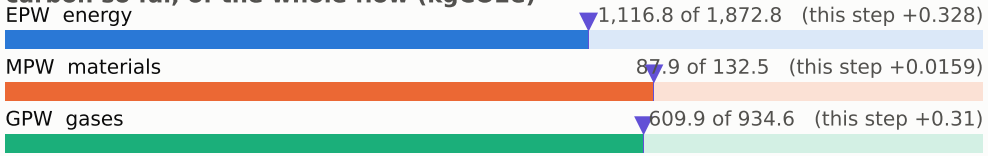

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

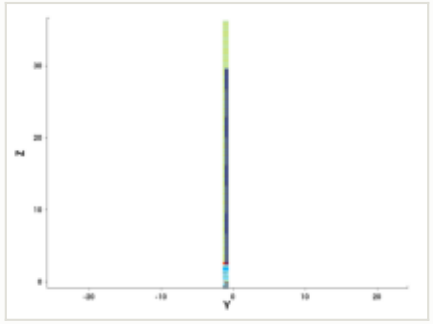

y cut at -1.035 µm

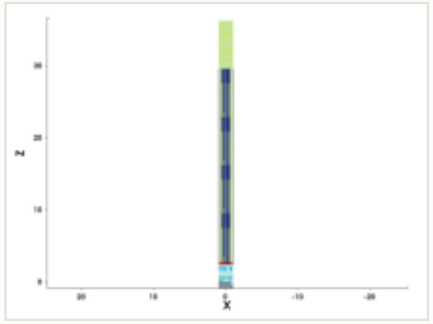

mask for this step

no mask for this step

steps by process area

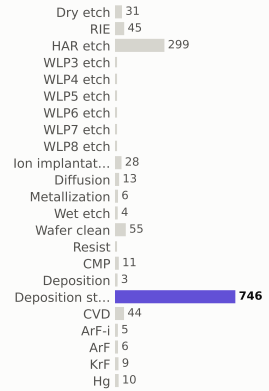

materials deposited (g)

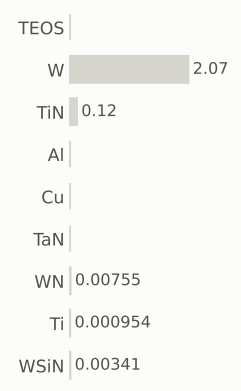

gases emitted (g)

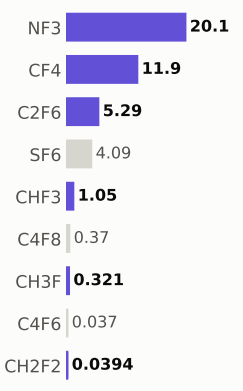

Step #17770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,815.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

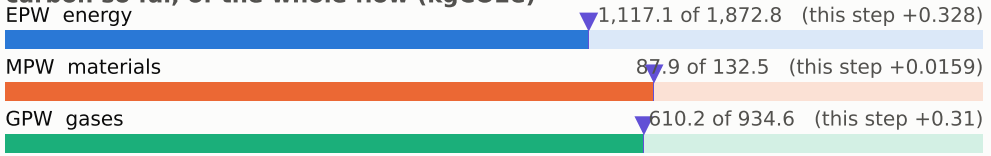

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

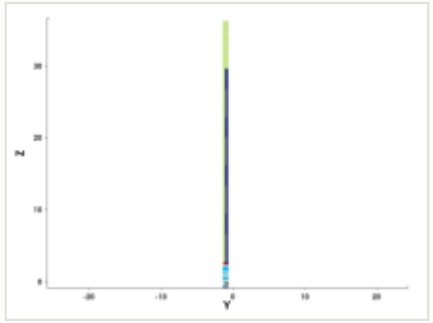

y cut at -1.035 µm

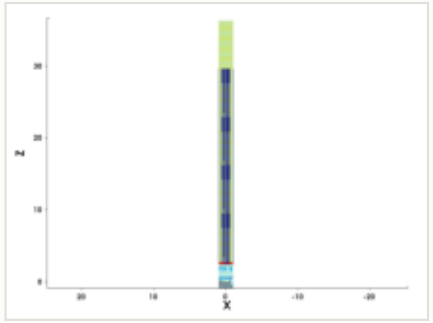

mask for this step

no mask for this step

steps by process area

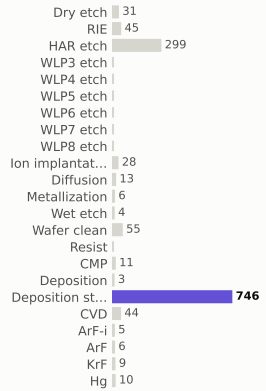

materials deposited (g)

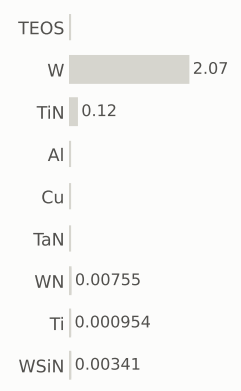

gases emitted (g)

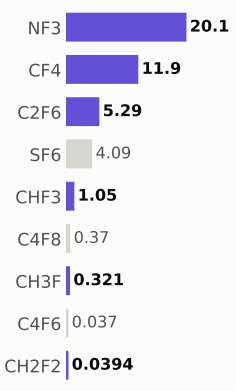

Step #17780: CVD

depo_isotropic · CVD

1.31	1,816.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

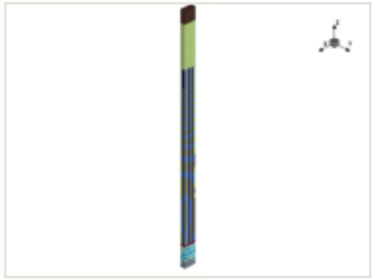

x cut at 0.000 µm

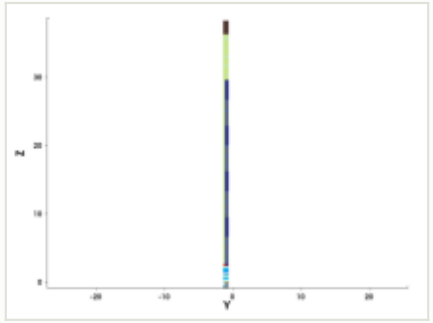

y cut at -1.035 µm

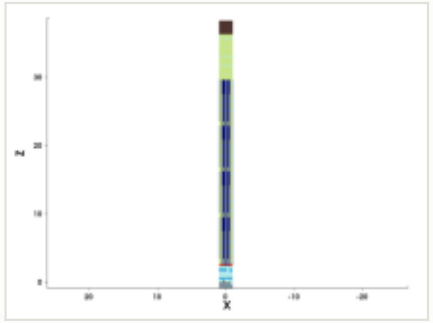

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

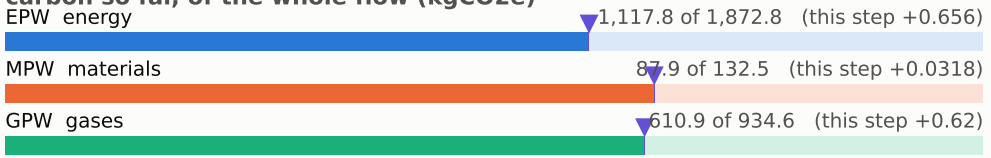

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

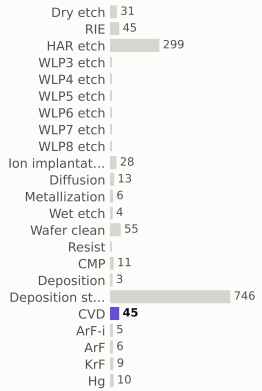

materials deposited (g)

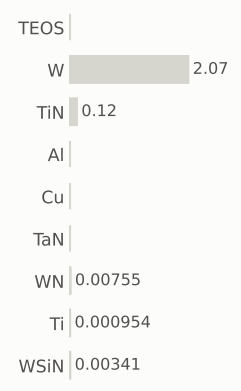

gases emitted (g)

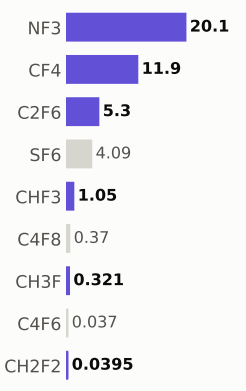

Step #17790: CVD

depo_isotropic · CVD

1.31	1,817.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

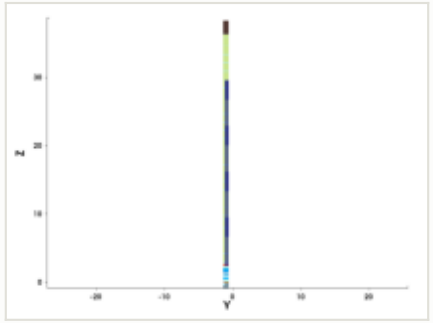

y cut at -1.035 µm

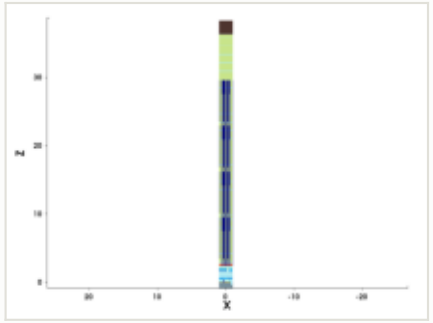

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

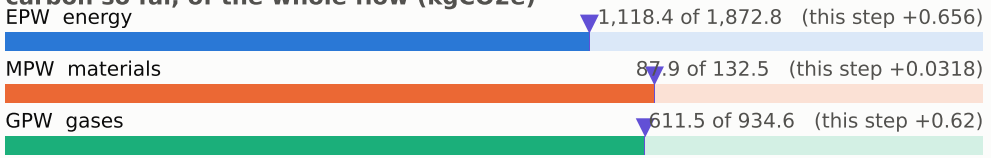

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

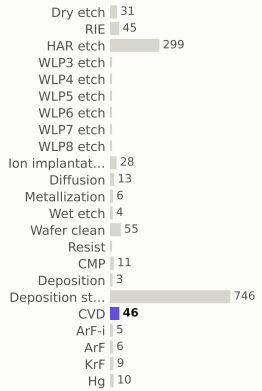

materials deposited (g)

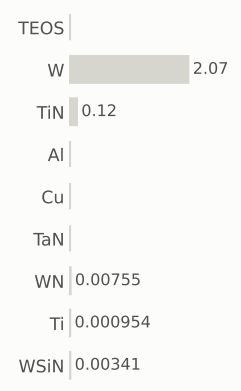

gases emitted (g)

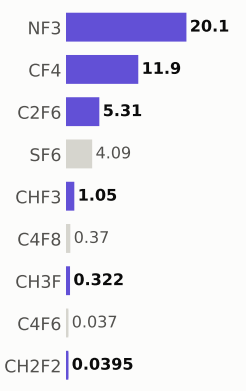

Step #17800: Wafer_clean

clean · Wafer_clean

0.169	1,818.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

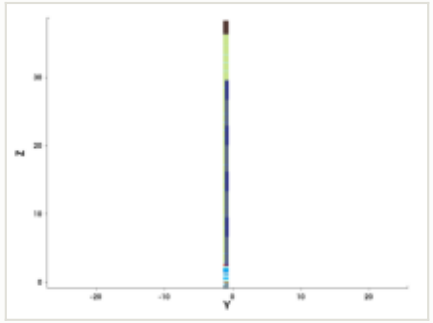

y cut at -1.035 µm

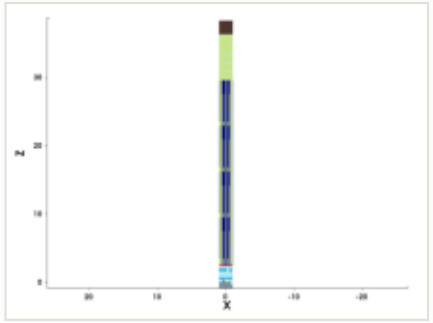

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

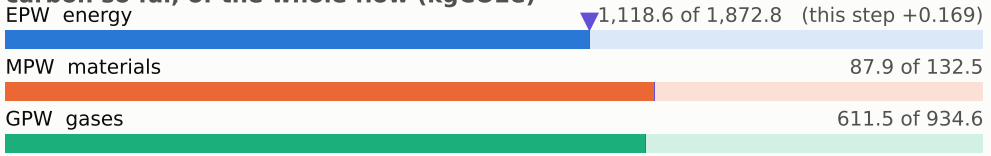

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

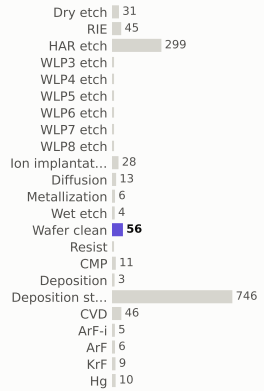

materials deposited (g)

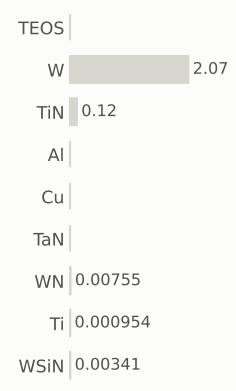

gases emitted (g)

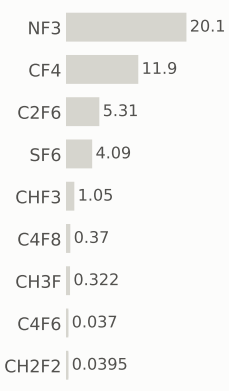

Step #17810: ArF-i

litho_patterning · ArF-i

0.217	1,818.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

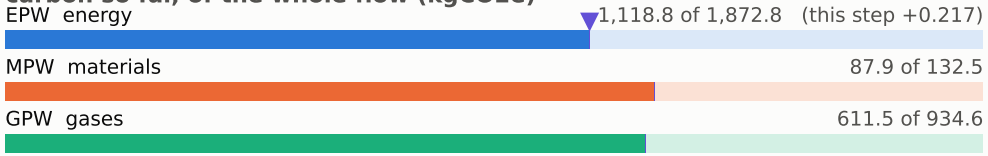

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

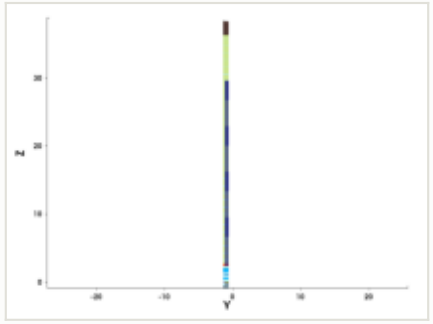

y cut at -1.035 µm

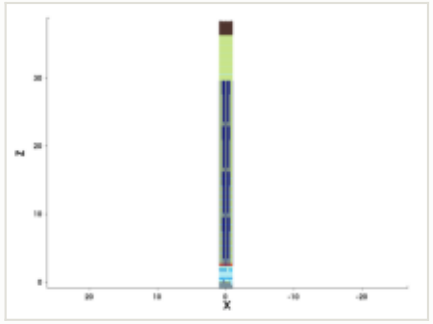

mask: layer 27:0 (OASIS)

steps by process area

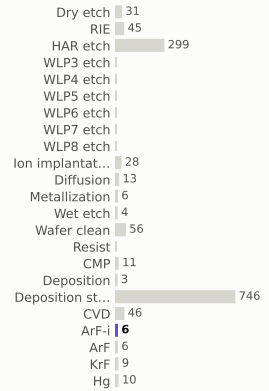

materials deposited (g)

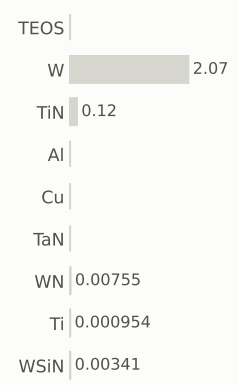

gases emitted (g)

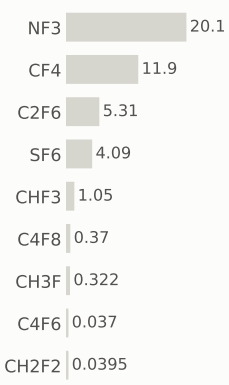

Step #17820: RIE

etch_anisotropic · RIE

1.04	1,819.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

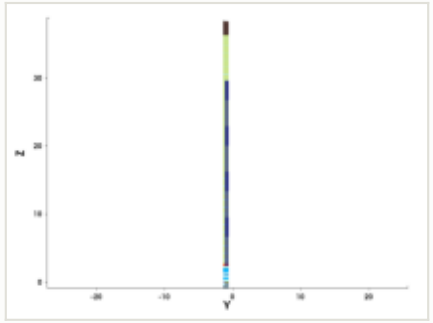

y cut at -1.035 µm

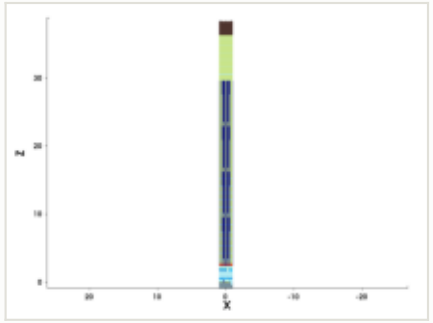

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

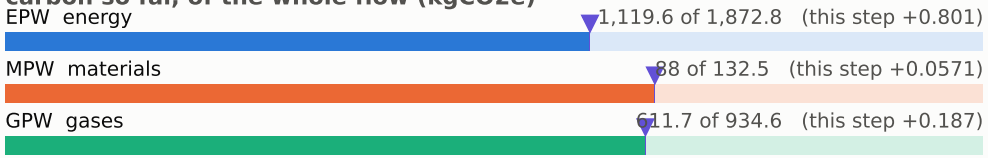

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

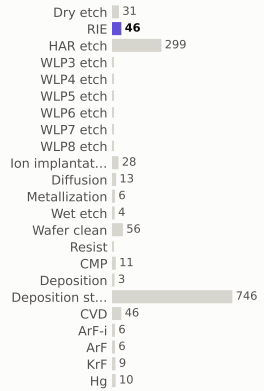

materials deposited (g)

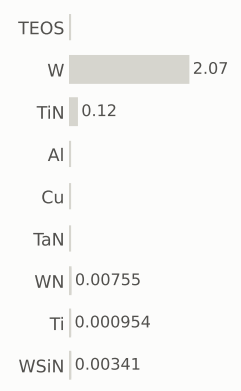

gases emitted (g)

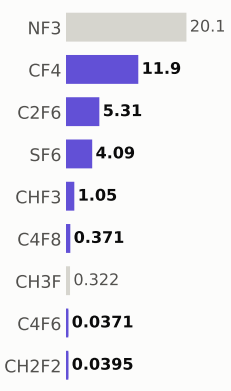

Step #17830: RIE

etch_anisotropic · RIE

1.04	1,820.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

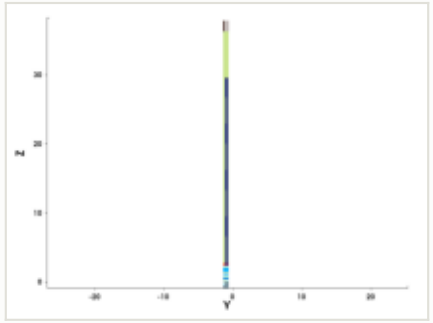

y cut at -1.035 µm

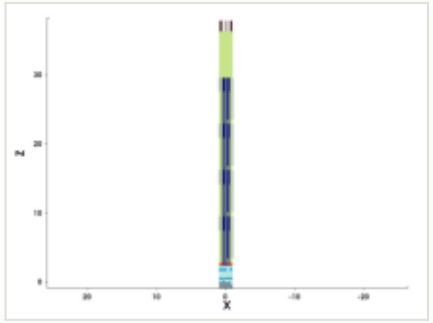

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

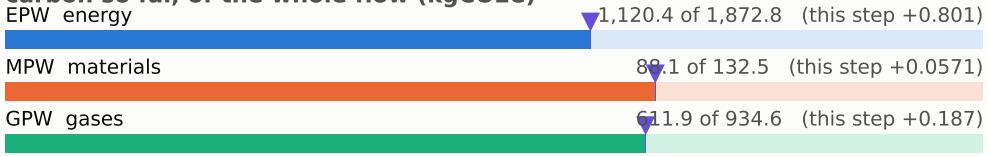

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

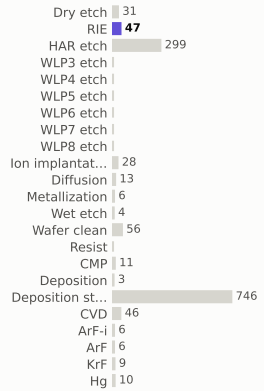

materials deposited (g)

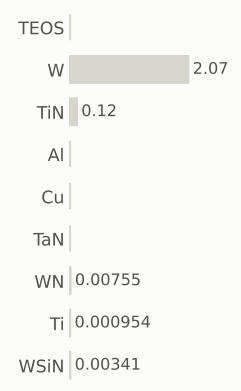

gases emitted (g)

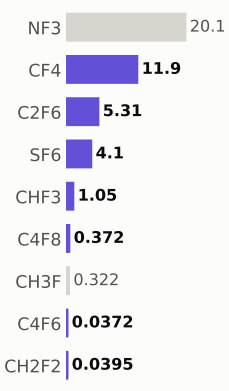

Step #17840: HAR_etch

etch_anisotropic · HAR_etch

1.04	1,821.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

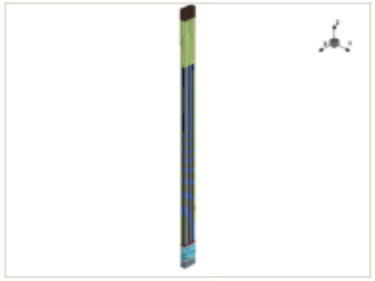

x cut at 0.000 µm

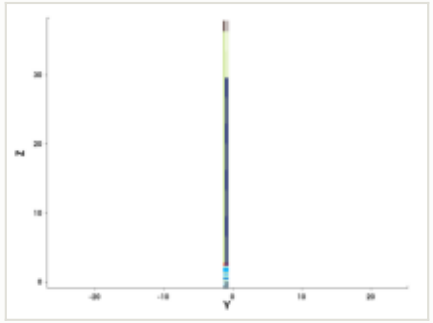

y cut at -1.035 µm

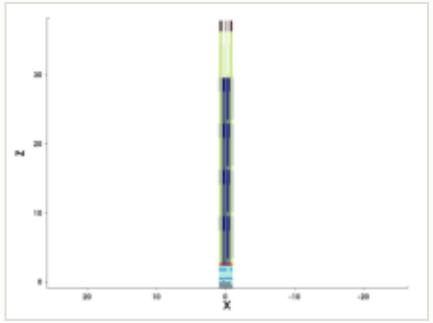

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

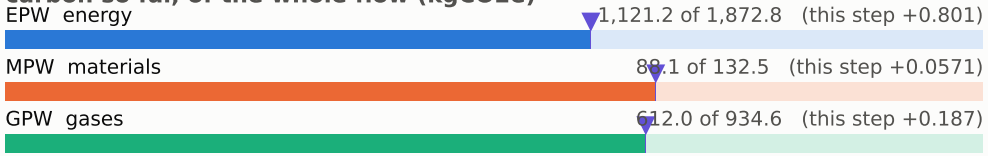

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

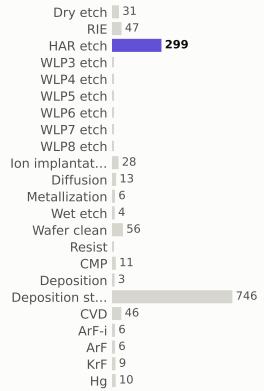

materials deposited (g)

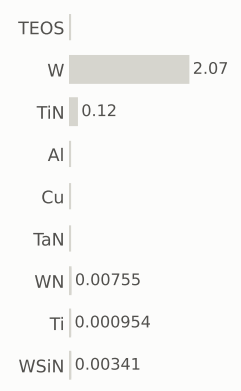

gases emitted (g)

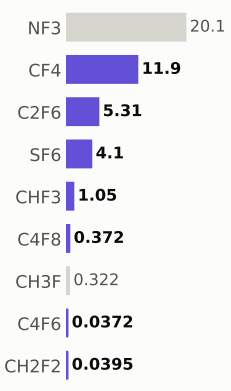

Step #17840.0671: HAR_etch

etch_noop · HAR_etch

1.04	1,822.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

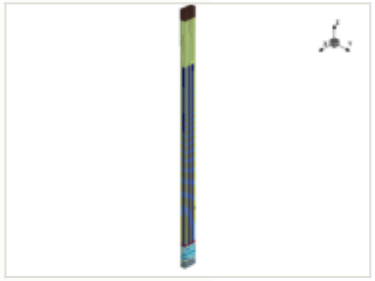

x cut at 0.000 µm

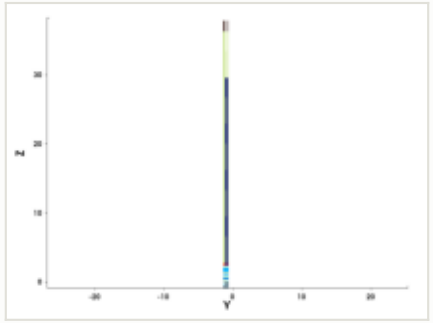

y cut at -1.035 µm

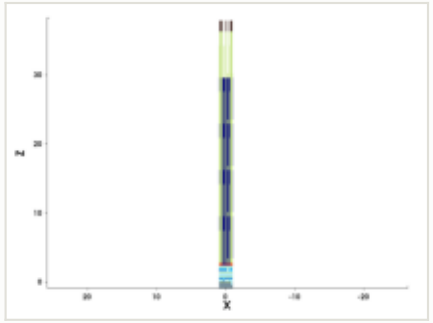

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

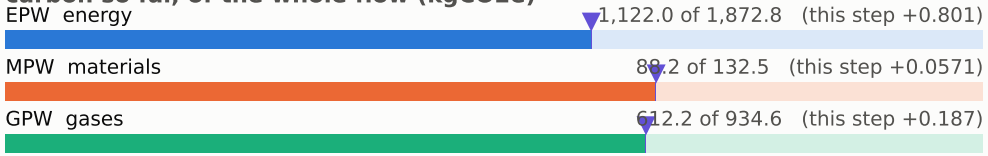

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

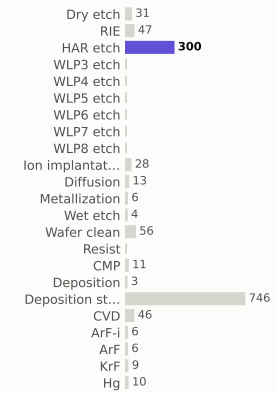

materials deposited (g)

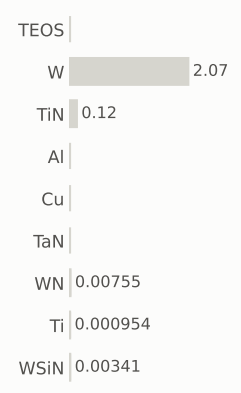

gases emitted (g)

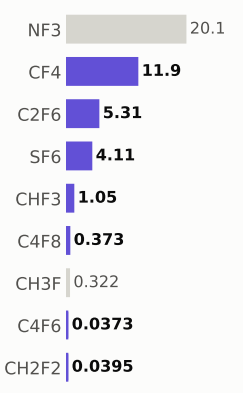

Step #17840.1342: HAR_etch

etch_noop · HAR_etch

1.04	1,823.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

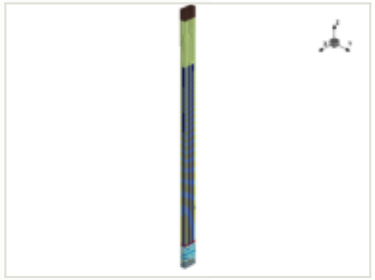

x cut at 0.000 µm

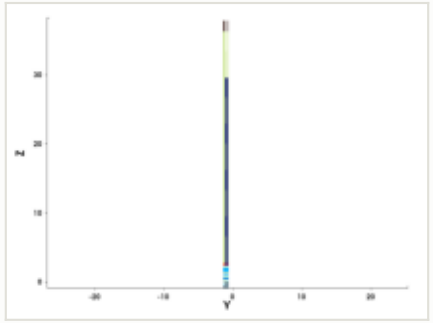

y cut at -1.035 µm

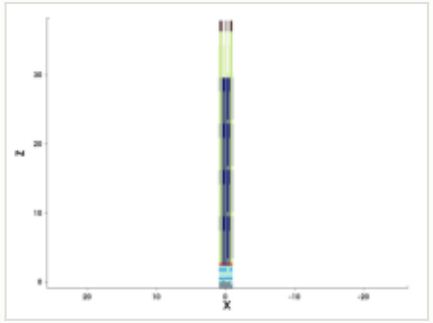

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

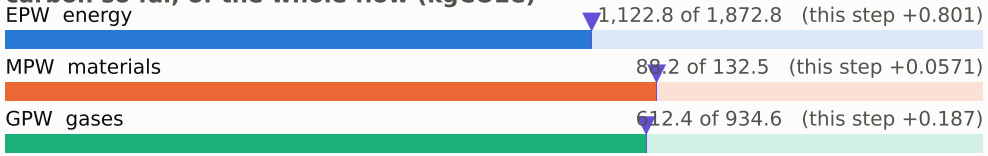

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

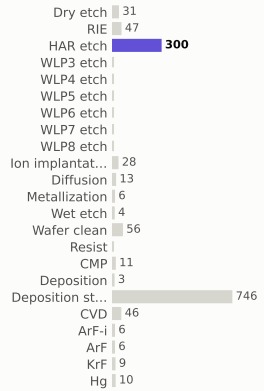

materials deposited (g)

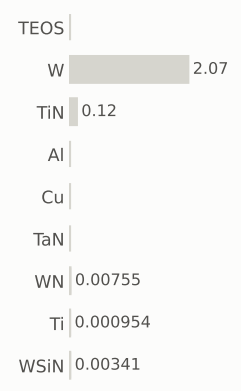

gases emitted (g)

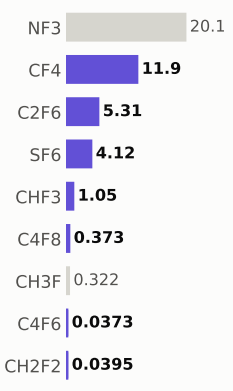

Step #17840.2013: HAR_etch

etch_noop · HAR_etch

1.04	1,824.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

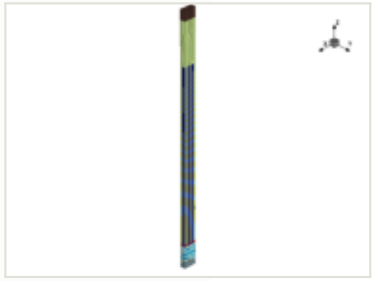

x cut at 0.000 µm

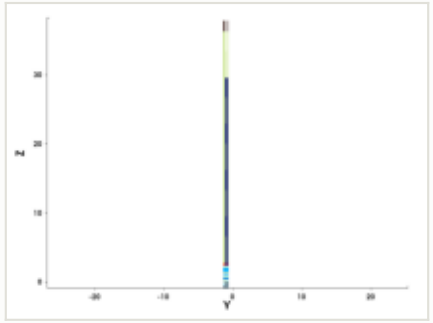

y cut at -1.035 µm

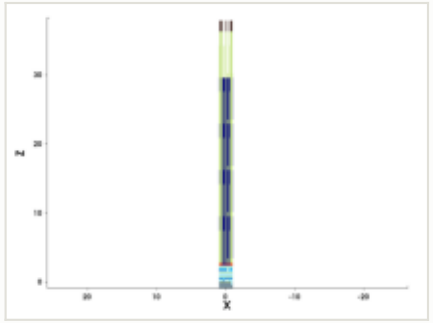

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

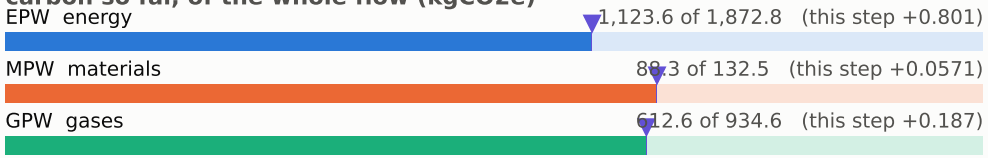

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

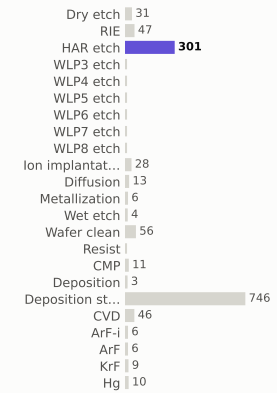

materials deposited (g)

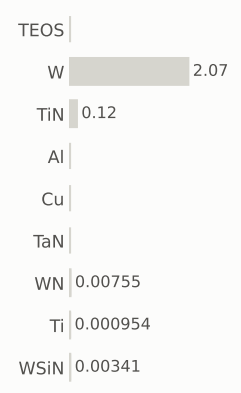

gases emitted (g)



Step #17840.2685: HAR_etch

etch_noop · HAR_etch

1.04	1,825.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

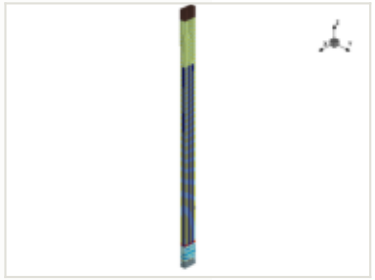

x cut at 0.000 µm

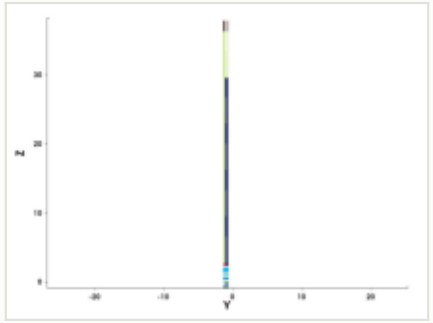

y cut at -1.035 µm

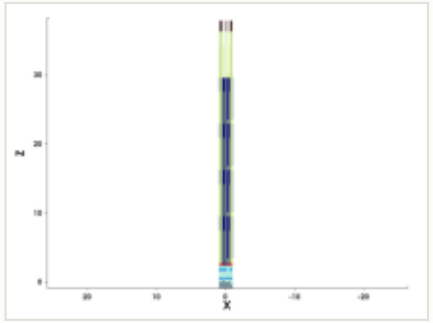

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

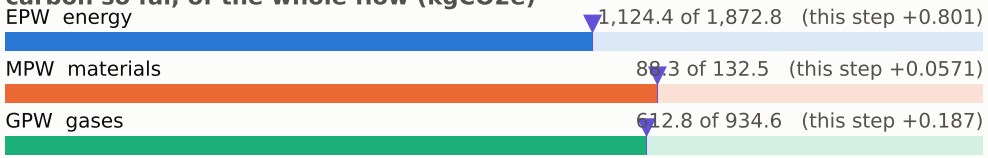

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

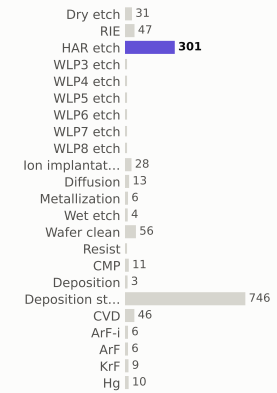

materials deposited (g)

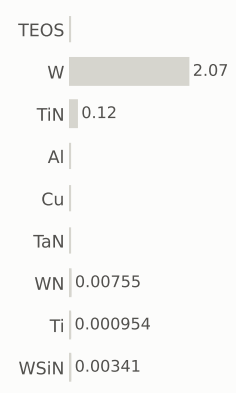

gases emitted (g)

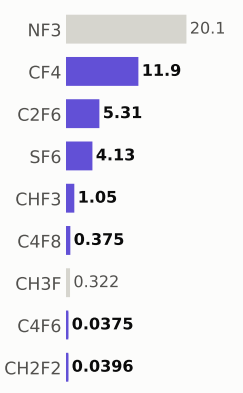

Step #17840.3356: HAR_etch

etch_noop · HAR_etch

1.04	1,826.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

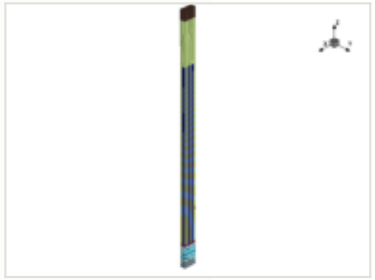

x cut at 0.000 µm

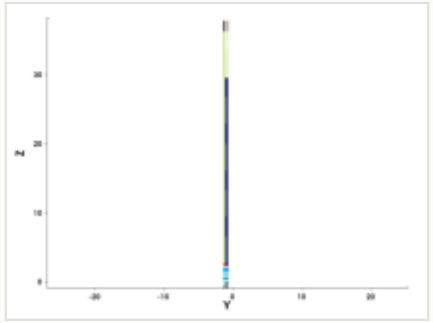

y cut at -1.035 µm

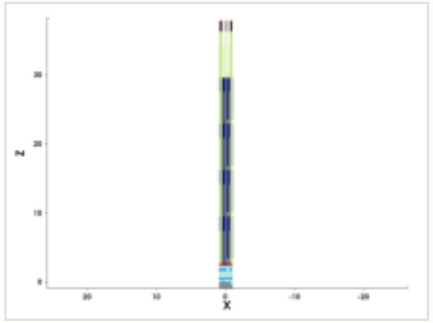

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

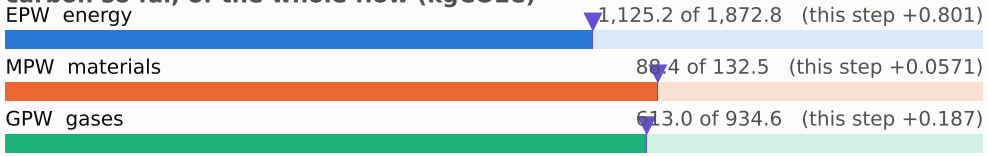

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

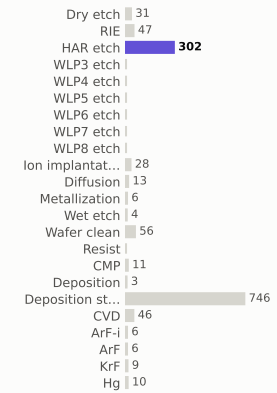

materials deposited (g)



gases emitted (g)

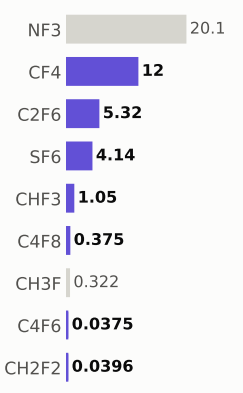

Step #17840.4027: HAR_etch

etch_noop · HAR_etch

1.04	1,827.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

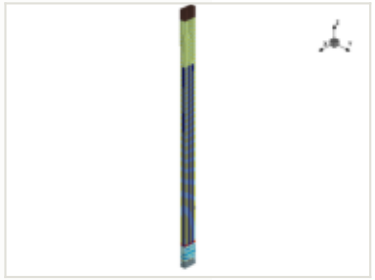

x cut at 0.000 µm

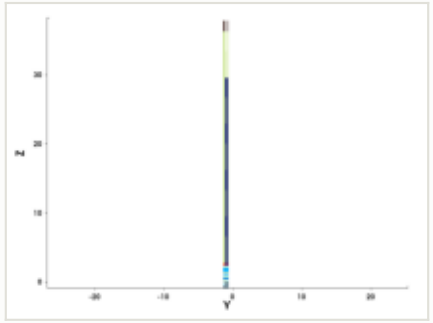

y cut at -1.035 µm

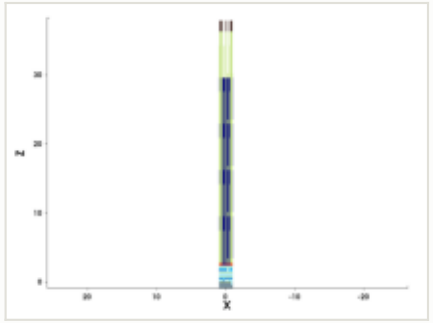

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

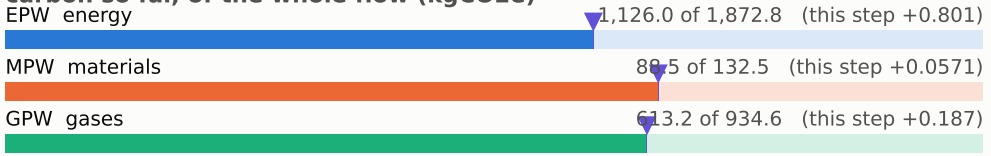

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

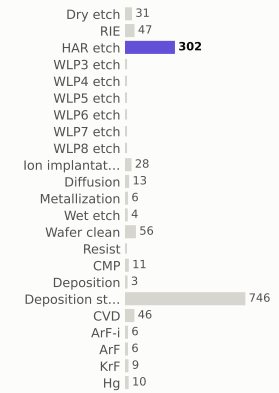

materials deposited (g)

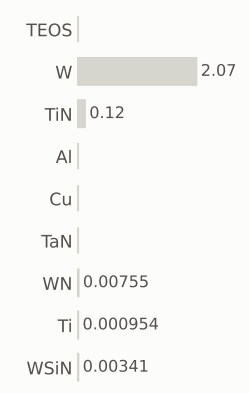

gases emitted (g)

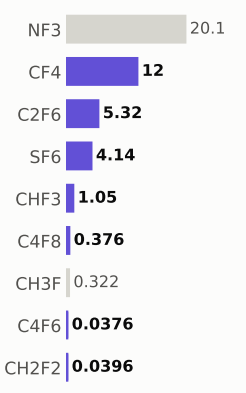

Step #17840.4698: HAR_etch

etch_noop · HAR_etch

1.04	1,828.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

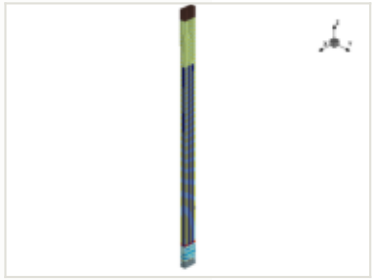

x cut at 0.000 µm

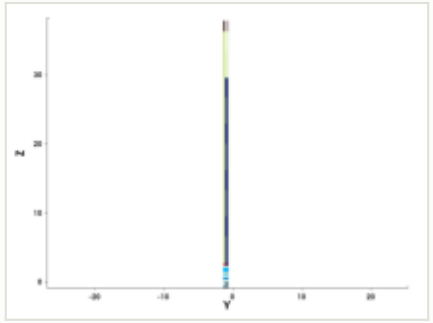

y cut at -1.035 µm

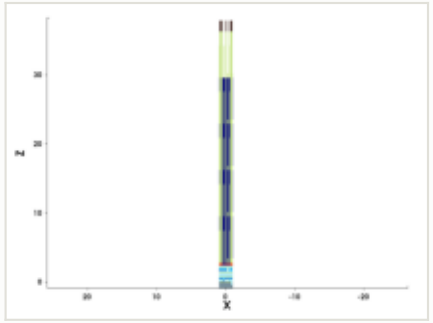

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

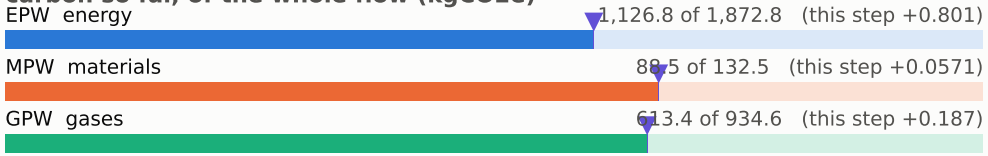

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

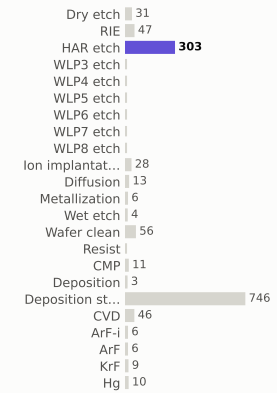

materials deposited (g)

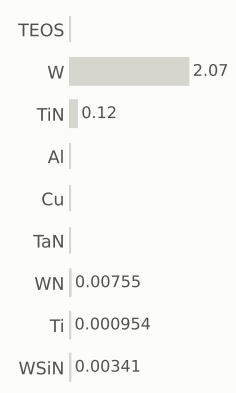

gases emitted (g)

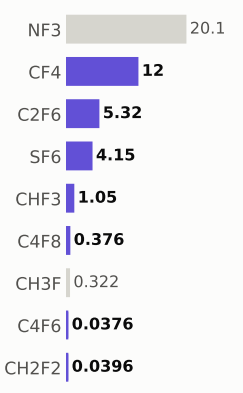

Step #17840.5369: HAR_etch

etch_noop · HAR_etch

1.04	1,829.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

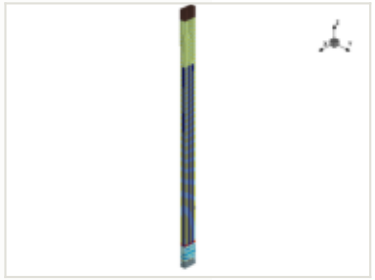

x cut at 0.000 µm

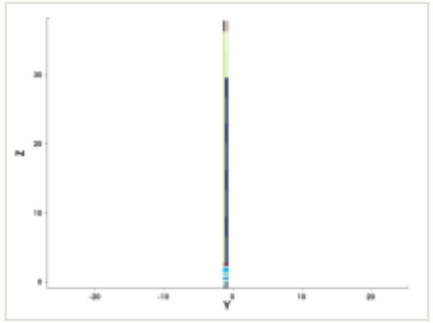

y cut at -1.035 µm

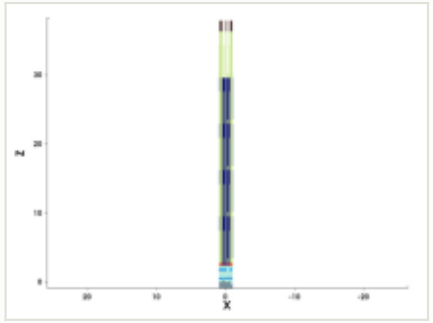

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

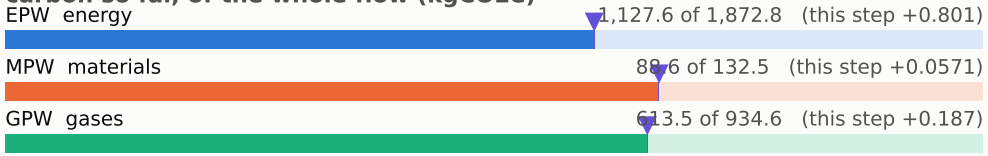

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

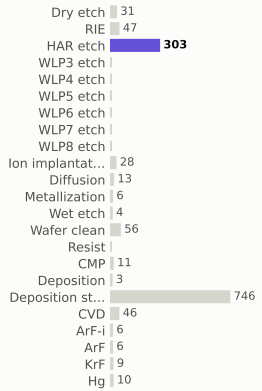

materials deposited (g)

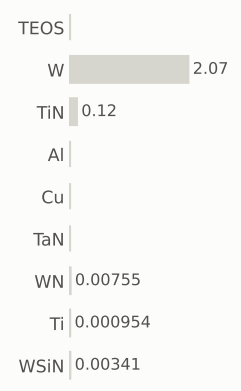

gases emitted (g)

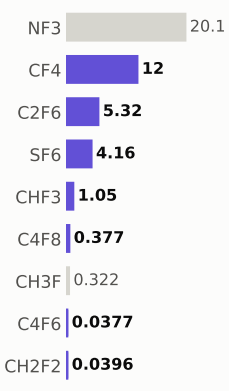

Step #17840.604: HAR_etch

etch_noop · HAR_etch

1.04	1,830.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

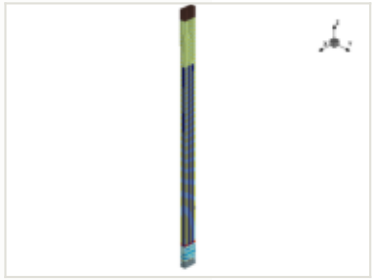

x cut at 0.000 µm

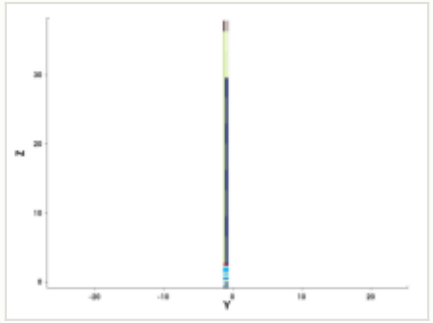

y cut at -1.035 µm

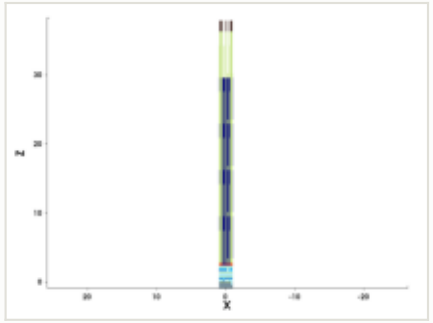

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

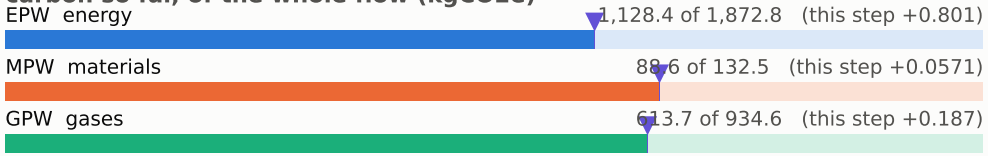

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

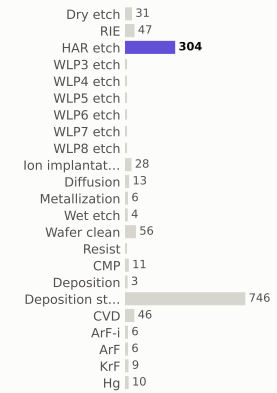

materials deposited (g)

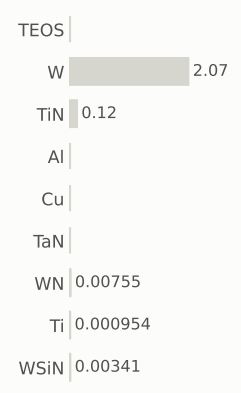

gases emitted (g)

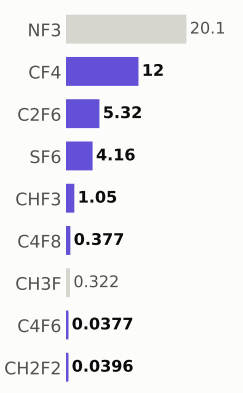

Step #17840.6711: HAR_etch

etch_noop · HAR_etch

1.04	1,831.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

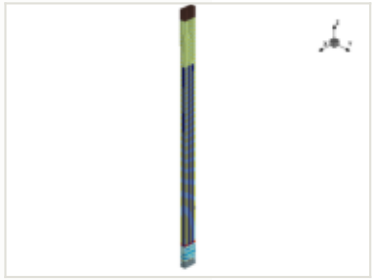

x cut at 0.000 µm

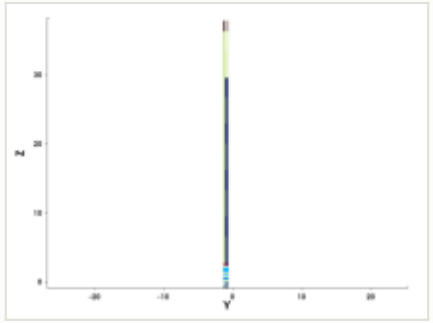

y cut at -1.035 µm

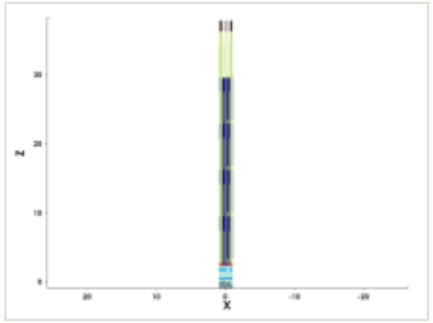

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

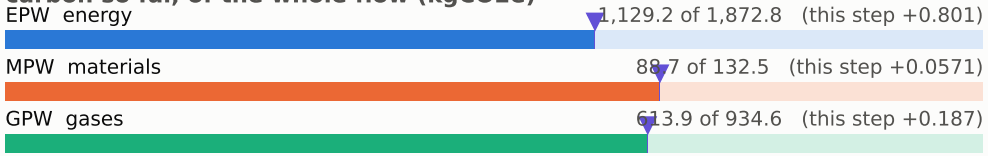

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

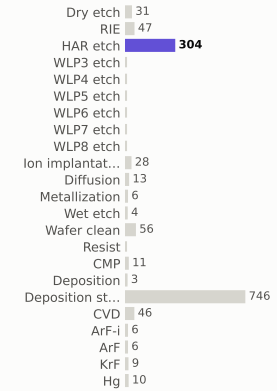

materials deposited (g)

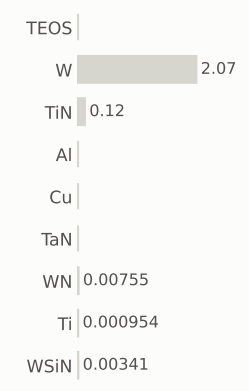

gases emitted (g)

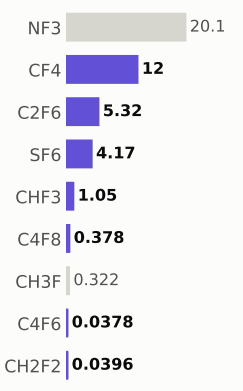

Step #17840.7383: HAR_etch

etch_noop · HAR_etch

1.04	1,832.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

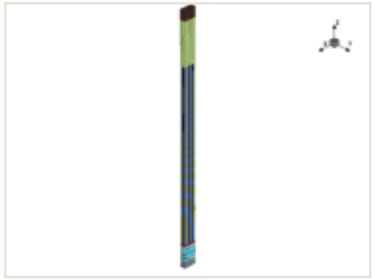

x cut at 0.000 µm

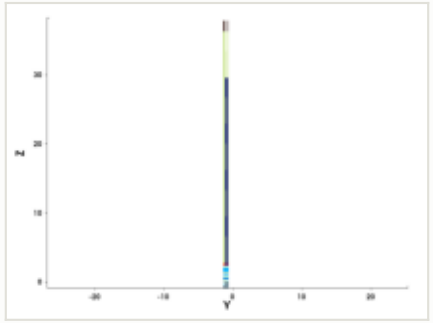

y cut at -1.035 µm

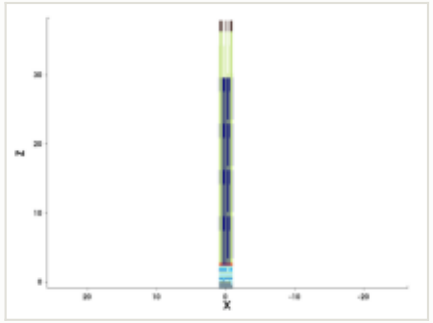

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

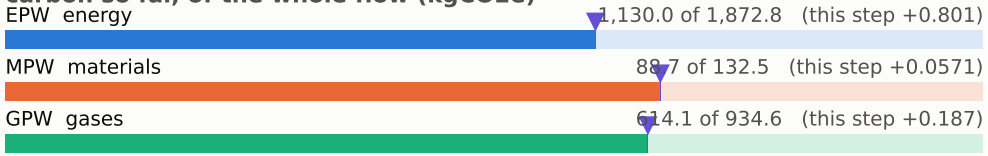

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

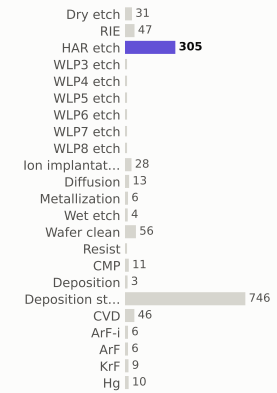

materials deposited (g)

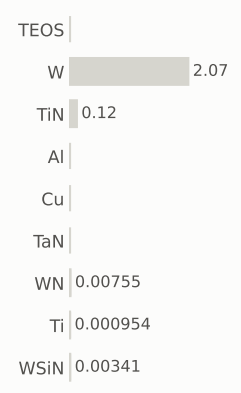

gases emitted (g)

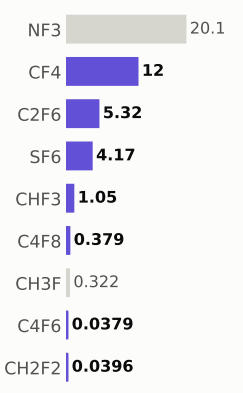

Step #17840.8054: HAR_etch

etch_noop · HAR_etch

1.04	1,833.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

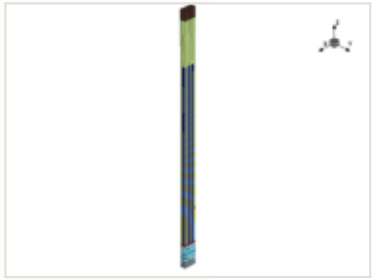

x cut at 0.000 µm

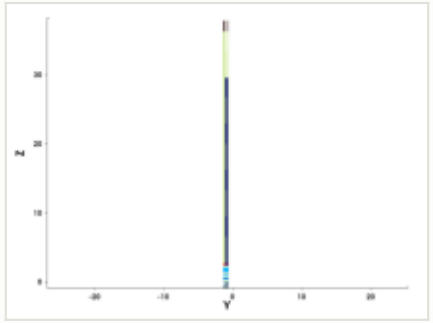

y cut at -1.035 µm

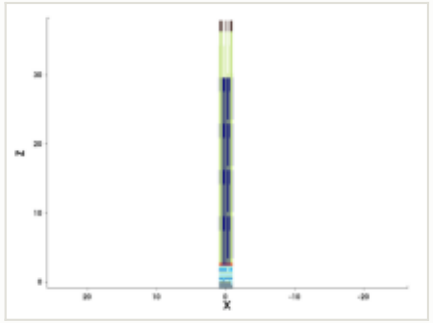

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

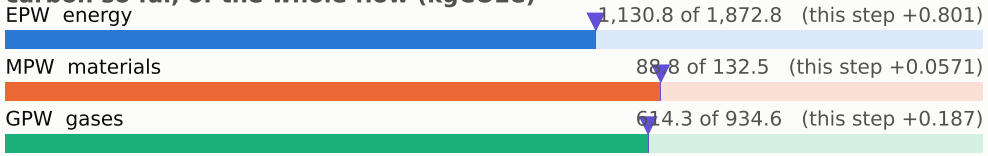

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

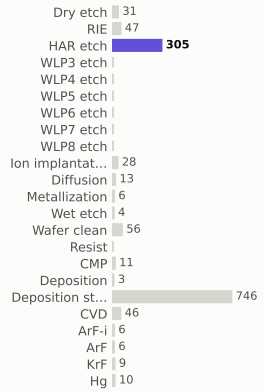

materials deposited (g)

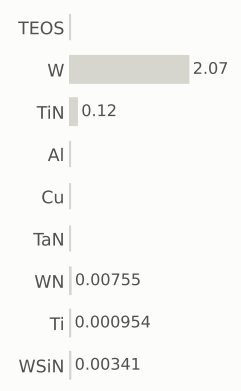

gases emitted (g)

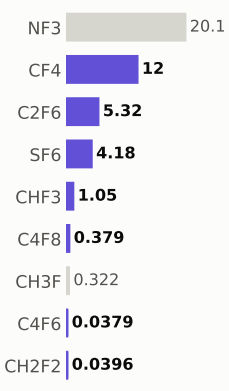

Step #17840.8725: HAR_etch

etch_noop · HAR_etch

1.04	1,834.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

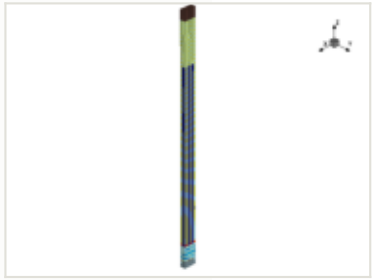

x cut at 0.000 µm

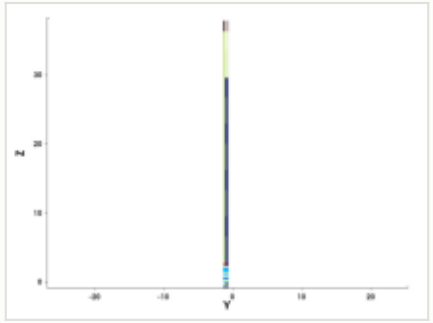

y cut at -1.035 µm

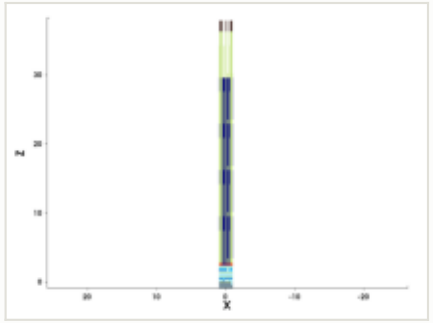

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

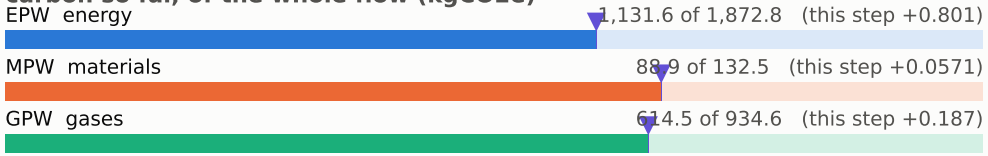

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

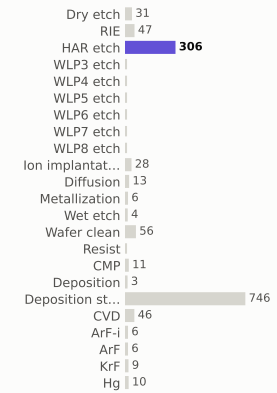

materials deposited (g)

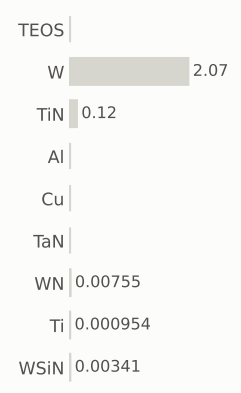

gases emitted (g)

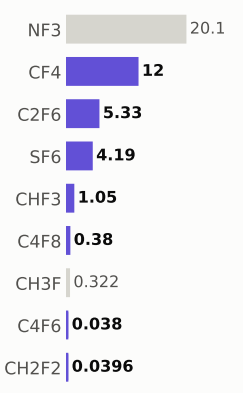

Step #17840.9396: HAR_etch

etch_noop · HAR_etch

1.04	1,836.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

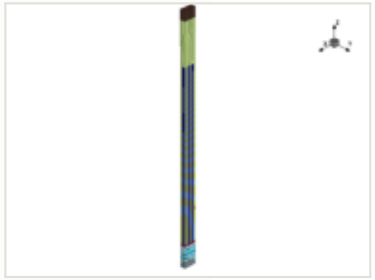

x cut at 0.000 µm

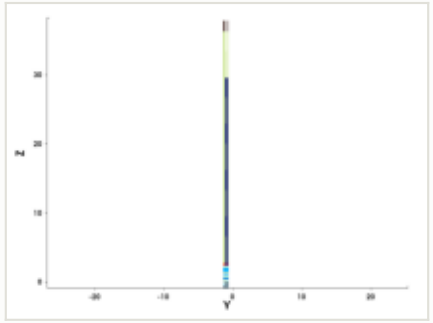

y cut at -1.035 µm

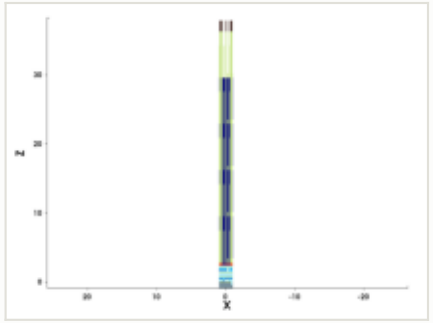

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

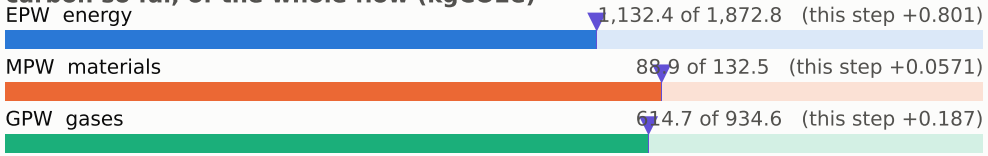

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

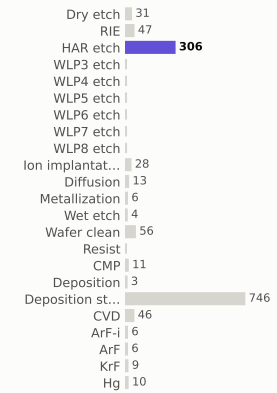

materials deposited (g)

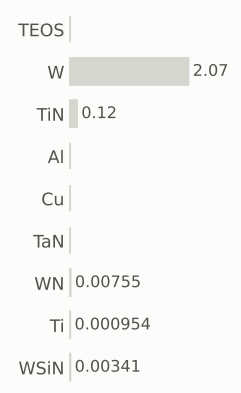

gases emitted (g)

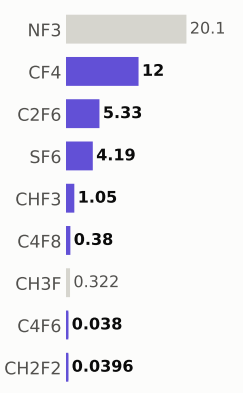

Step #17841.0067: HAR_etch

etch_noop · HAR_etch

1.04	1,837.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

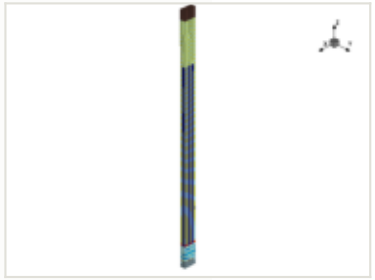

x cut at 0.000 µm

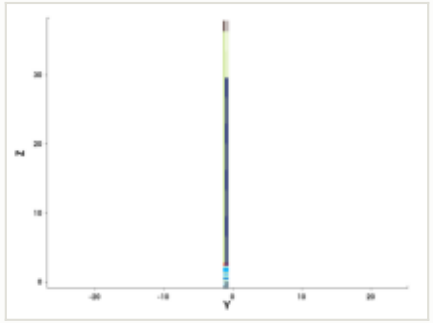

y cut at -1.035 µm

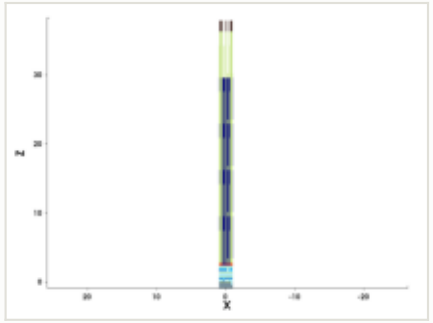

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

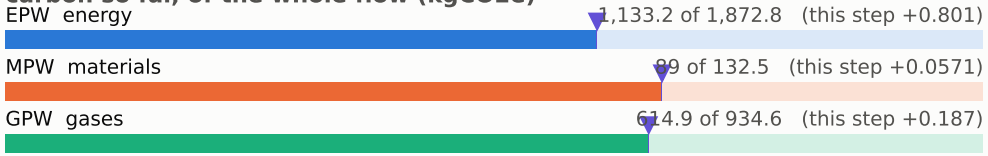

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

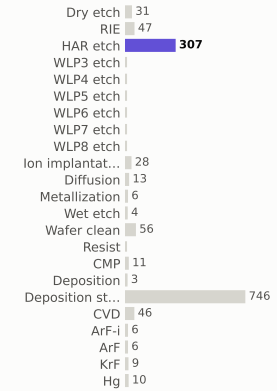

materials deposited (g)

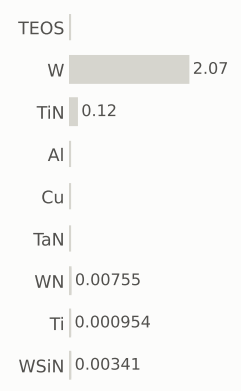

gases emitted (g)

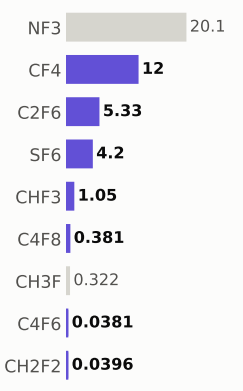

Step #17841.0738: HAR_etch

etch_noop · HAR_etch

1.04	1,838.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

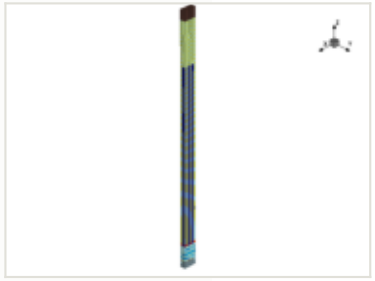

x cut at 0.000 µm

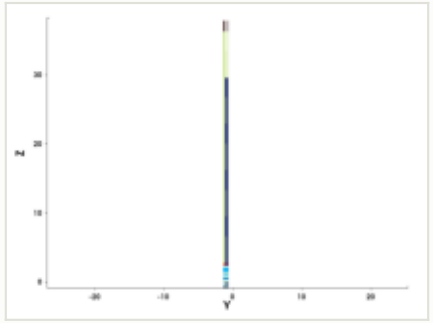

y cut at -1.035 µm

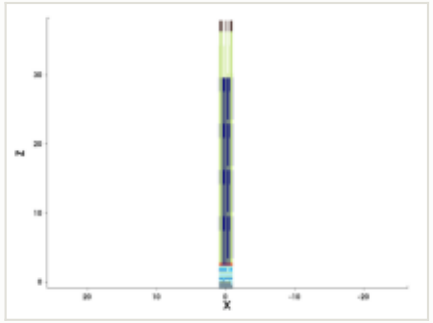

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

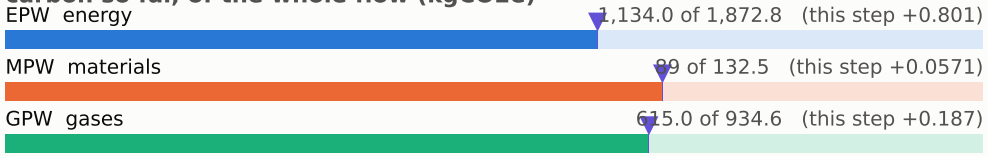

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

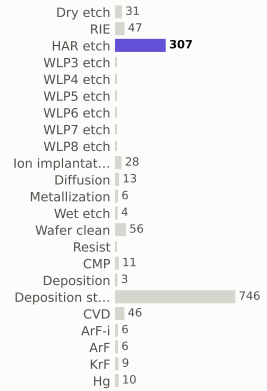

materials deposited (g)

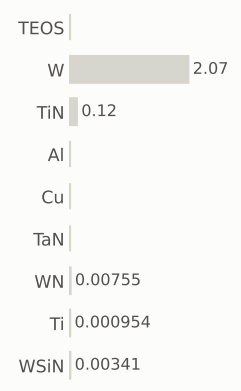

gases emitted (g)

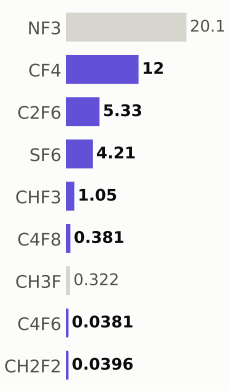

Step #17841.1409: HAR_etch

etch_noop · HAR_etch

1.04	1,839.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

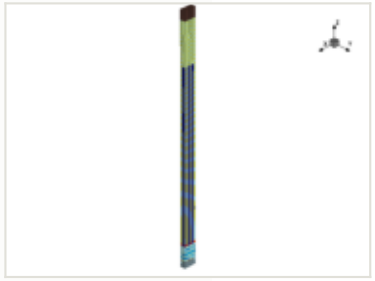

x cut at 0.000 µm

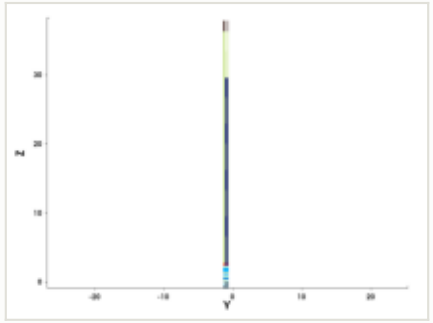

y cut at -1.035 µm

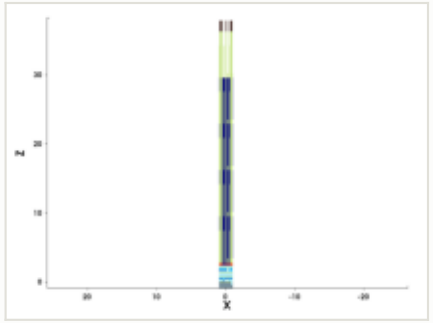

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

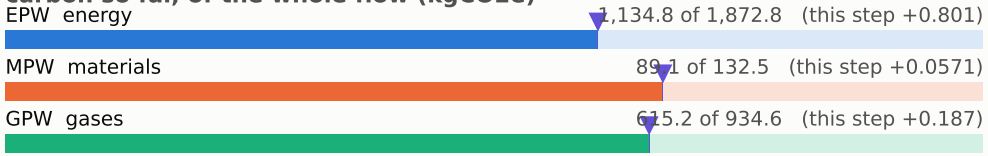

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

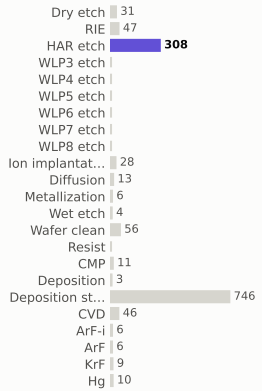

materials deposited (g)

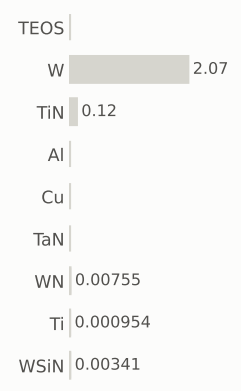

gases emitted (g)

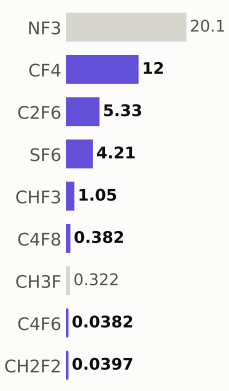

Step #17841.2081: HAR_etch

etch_noop · HAR_etch

1.04	1,840.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

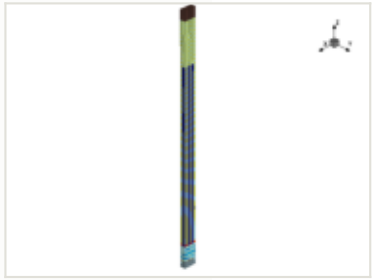

x cut at 0.000 µm

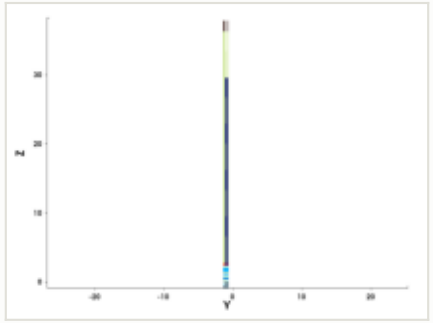

y cut at -1.035 µm

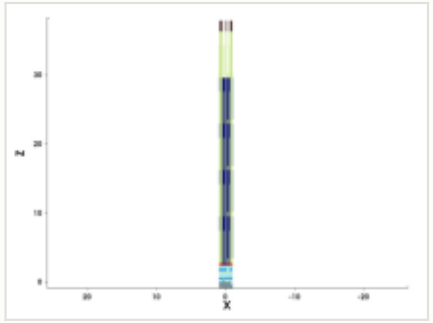

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

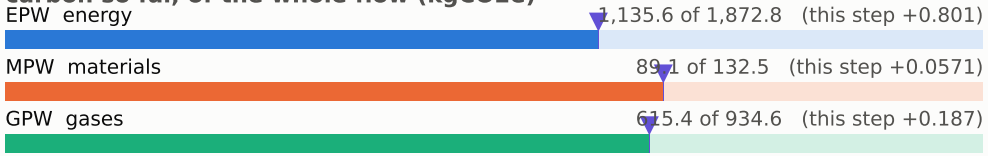

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

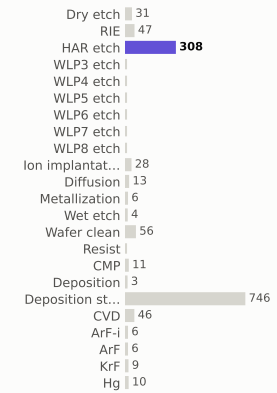

materials deposited (g)

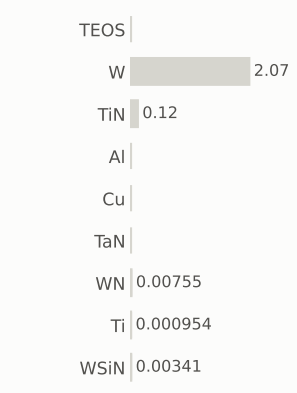

gases emitted (g)

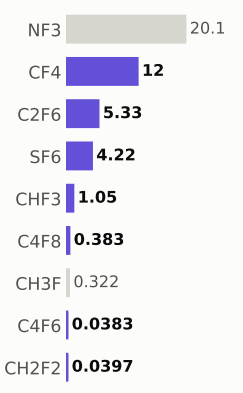

Step #17841.2752: HAR_etch

etch_noop · HAR_etch

1.04	1,841.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

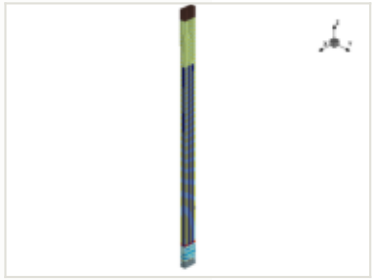

x cut at 0.000 µm

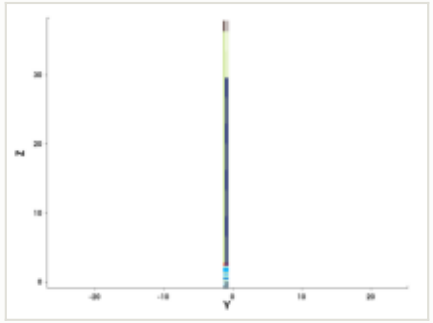

y cut at -1.035 µm

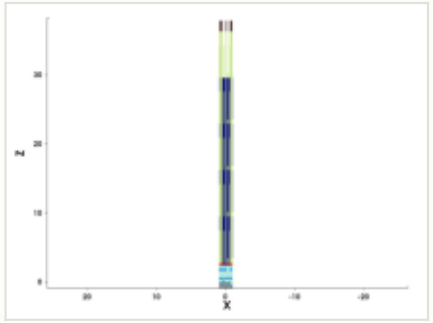

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

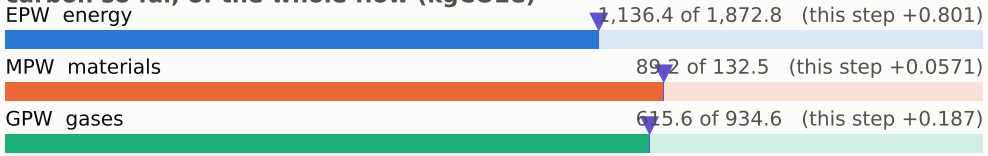

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

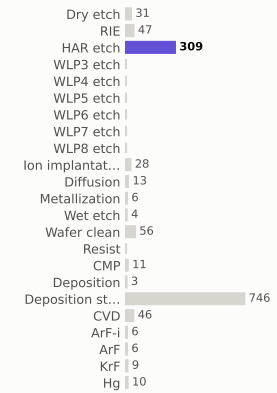

materials deposited (g)

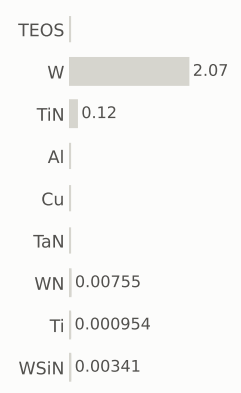

gases emitted (g)

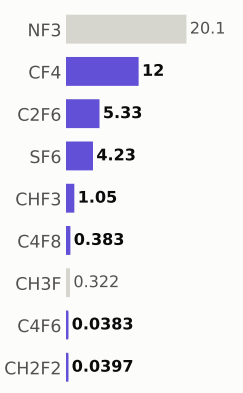

Step #17841.3423: HAR_etch

etch_noop · HAR_etch

1.04	1,842.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

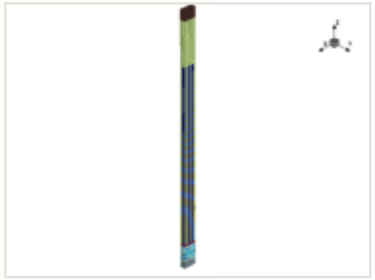

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

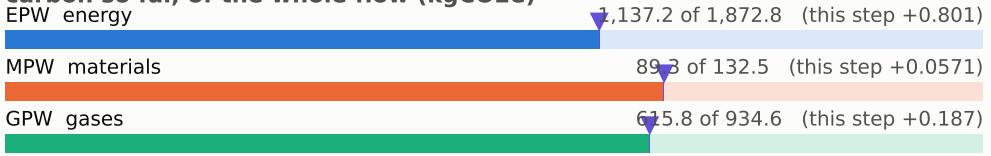

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

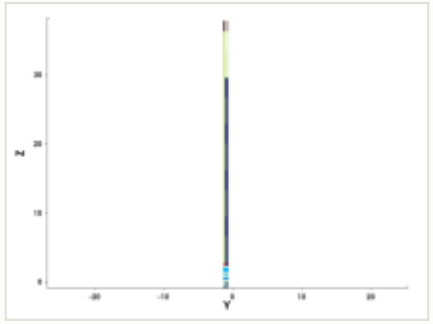

y cut at -1.035 µm

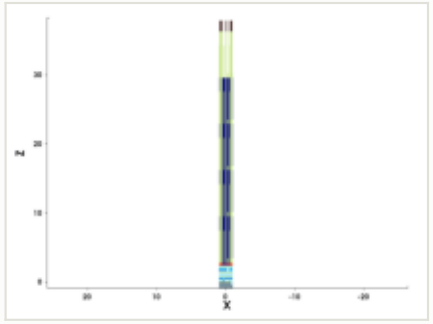

mask for this step

no mask for this step

steps by process area

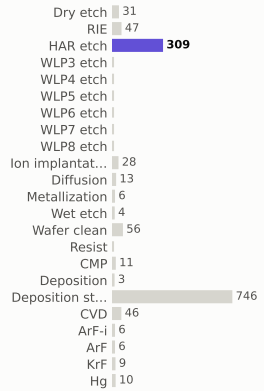

materials deposited (g)

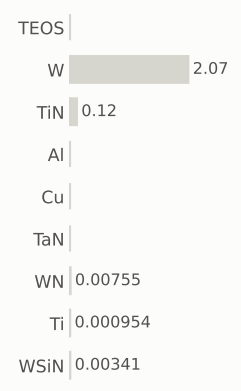

gases emitted (g)

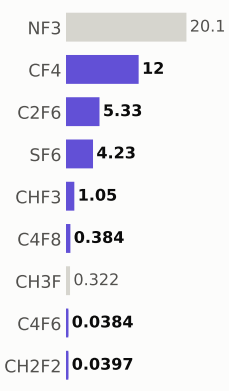

Step #17841.4094: HAR_etch

etch_noop · HAR_etch

1.04	1,843.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

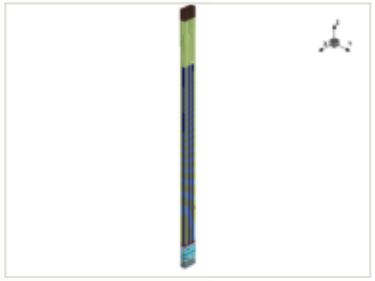

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

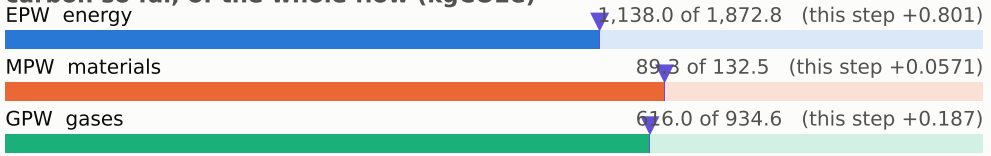

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

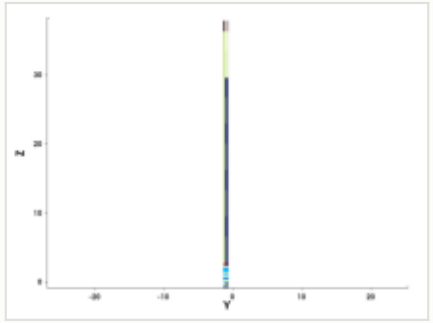

y cut at -1.035 µm

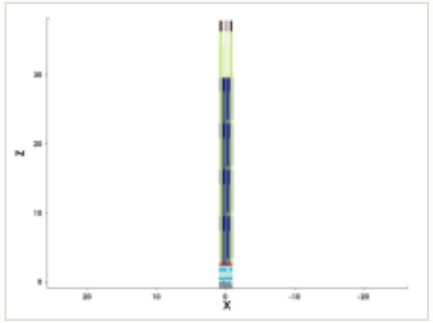

mask for this step

no mask for this step

steps by process area

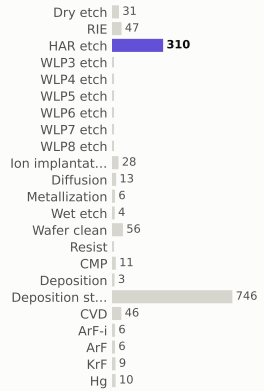

materials deposited (g)

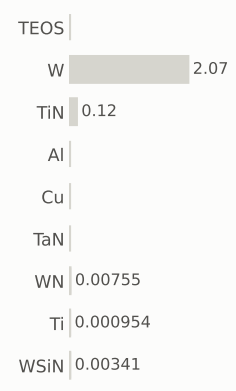

gases emitted (g)

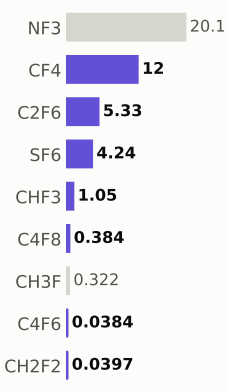

Step #17841.4765: HAR_etch

etch_noop · HAR_etch

1.04	1,844.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

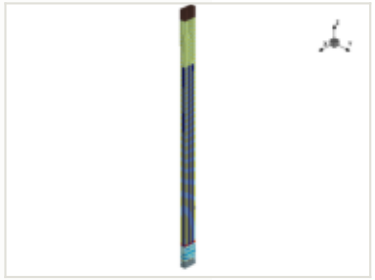

x cut at 0.000 µm

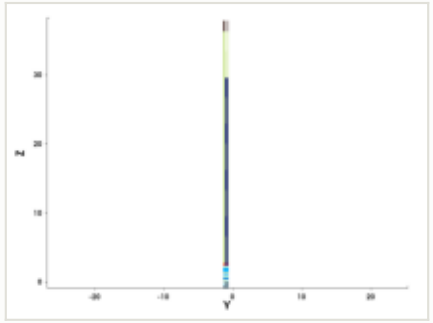

y cut at -1.035 µm

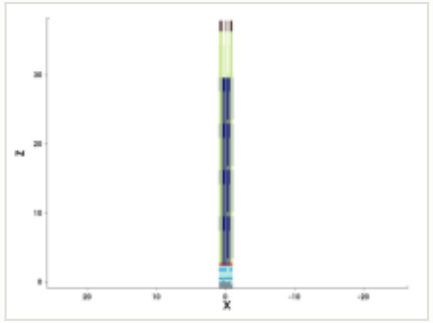

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

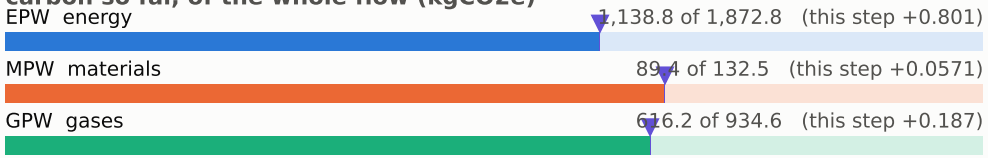

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

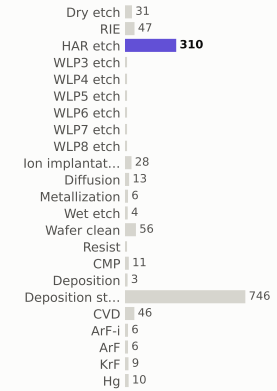

materials deposited (g)

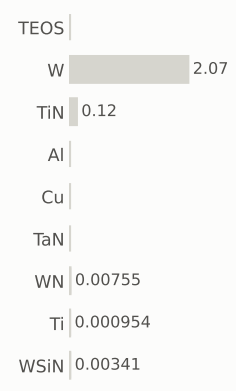

gases emitted (g)

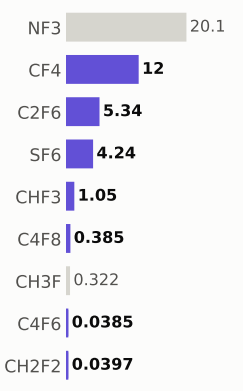

Step #17841.5436: HAR_etch

etch_noop · HAR_etch

1.04	1,845.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

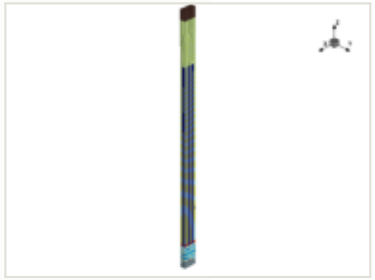

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

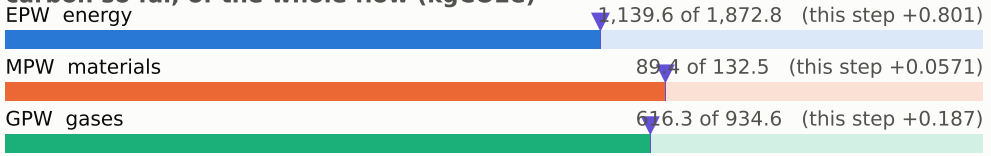

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

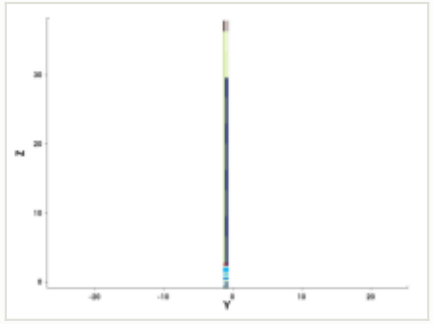

y cut at -1.035 µm

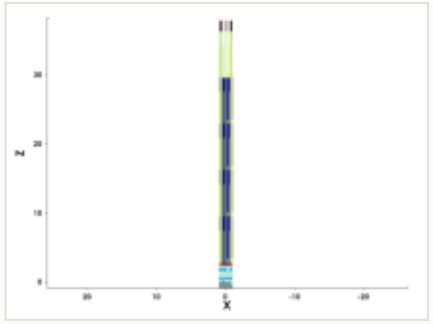

mask for this step

no mask for this step

steps by process area

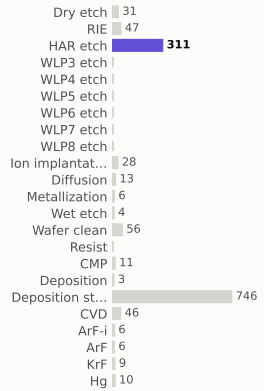

materials deposited (g)

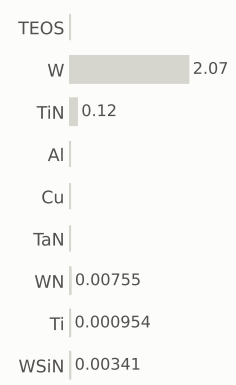

gases emitted (g)

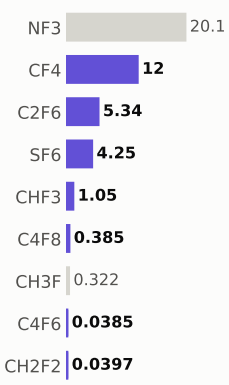

Step #17841.6107: HAR_etch

etch_noop · HAR_etch

1.04	1,846.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

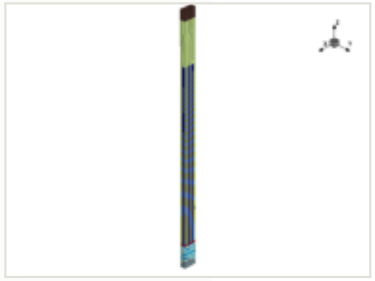

x cut at 0.000 µm

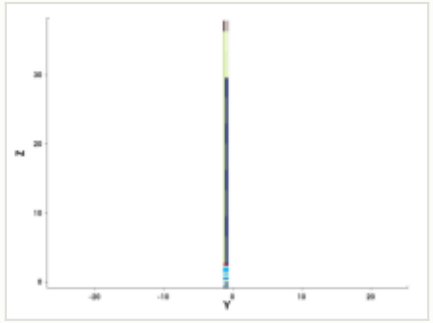

y cut at -1.035 µm

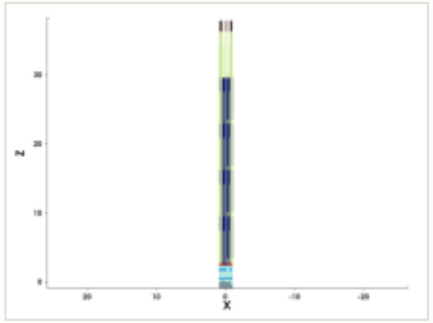

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

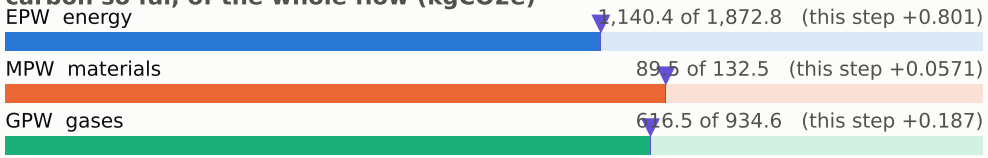

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

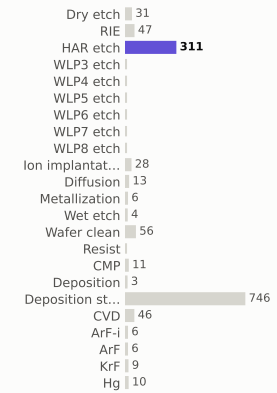

materials deposited (g)

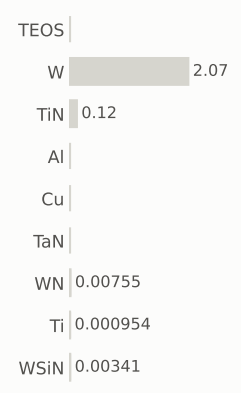

gases emitted (g)

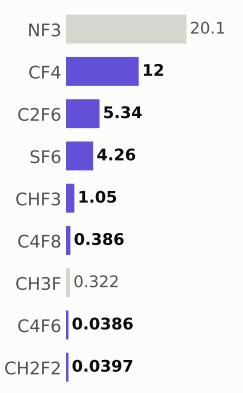

Step #17841.6779: HAR_etch

etch_noop · HAR_etch

1.04	1,847.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

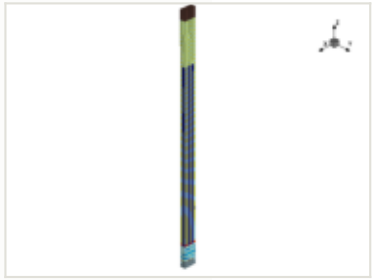

x cut at 0.000 µm

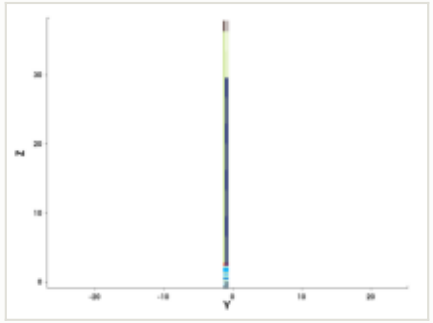

y cut at -1.035 µm

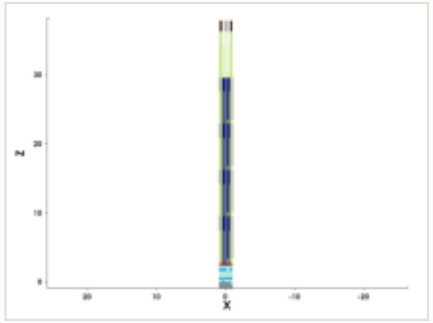

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

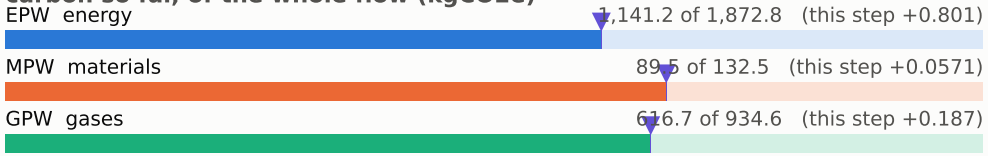

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

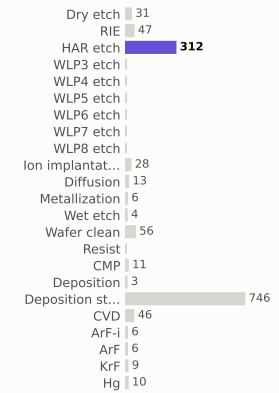

materials deposited (g)



gases emitted (g)

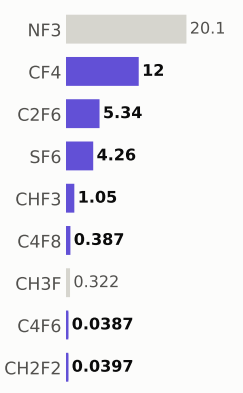

Step #17841.745: HAR_etch

etch_noop · HAR_etch

1.04	1,848.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

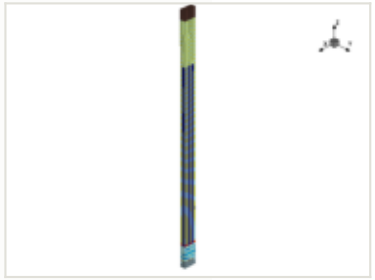

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

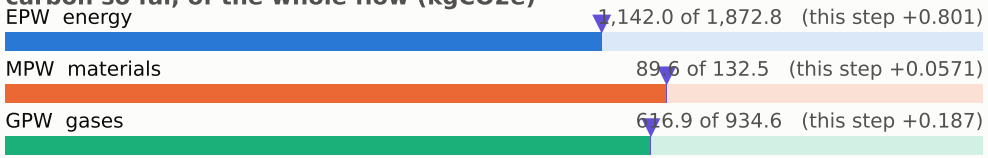

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

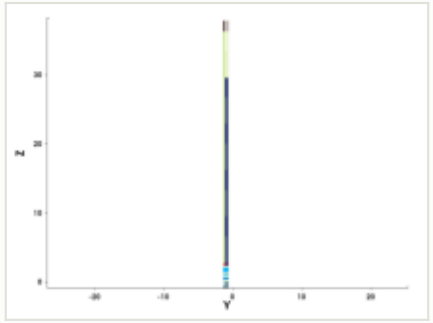

y cut at -1.035 µm

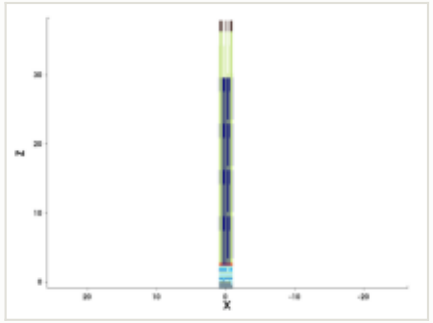

mask for this step

no mask for this step

steps by process area

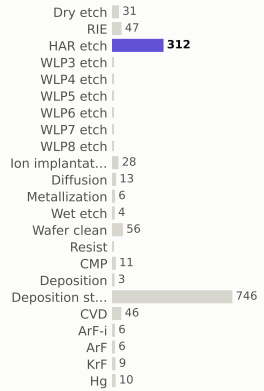

materials deposited (g)

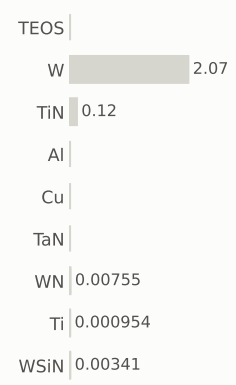

gases emitted (g)

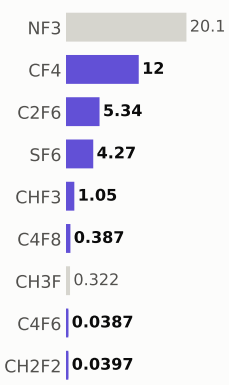

Step #17841.8121: HAR_etch

etch_noop · HAR_etch

1.04	1,849.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

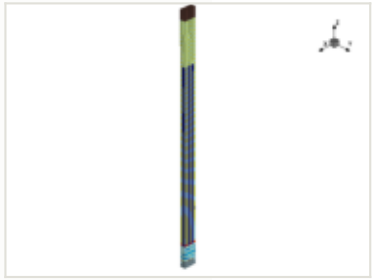

x cut at 0.000 µm

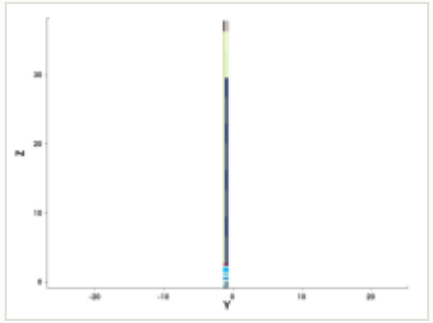

y cut at -1.035 µm

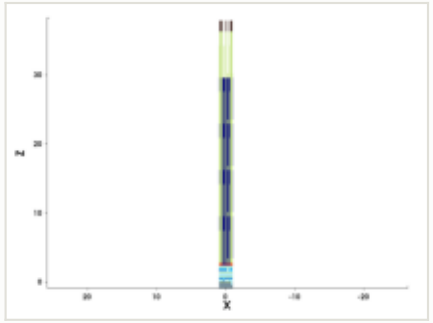

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

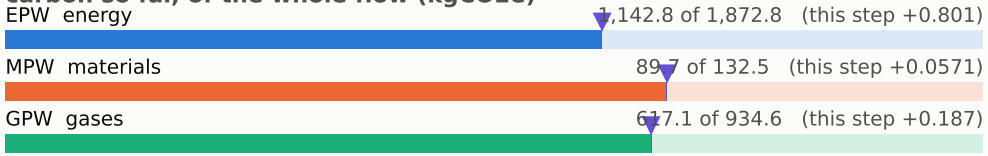

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

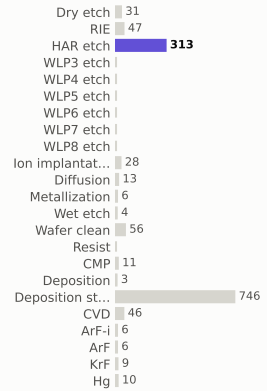

materials deposited (g)

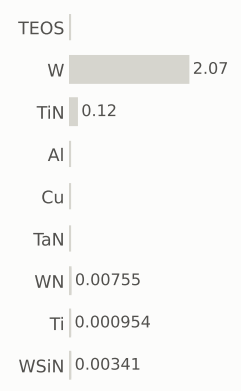

gases emitted (g)

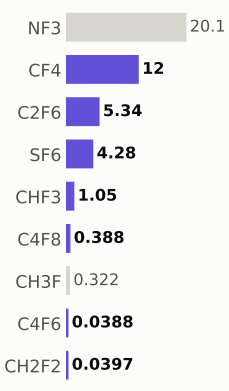

Step #17841.8792: HAR_etch

etch_noop · HAR_etch

1.04	1,850.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

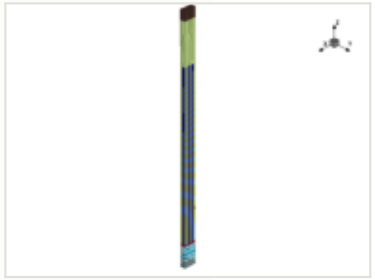

x cut at 0.000 µm

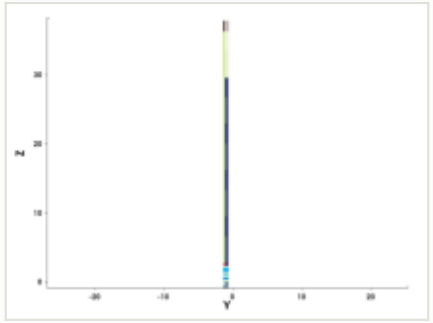

y cut at -1.035 µm

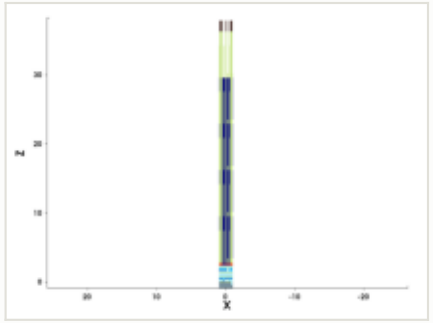

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

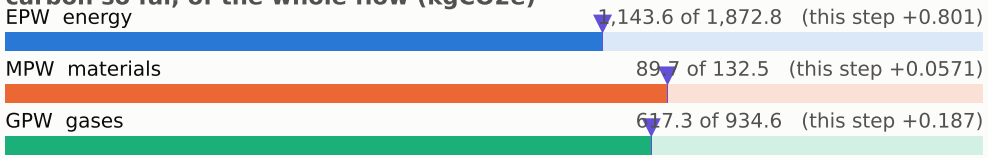

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

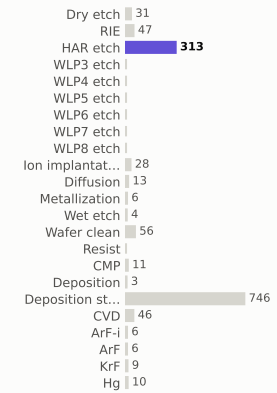

materials deposited (g)

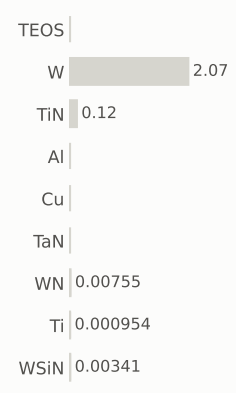

gases emitted (g)

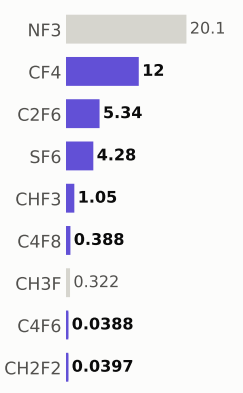

Step #17841.9463: HAR_etch

etch_noop · HAR_etch

1.04	1,851.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

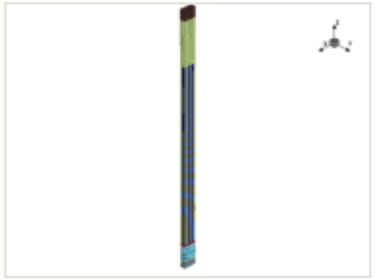

x cut at 0.000 µm

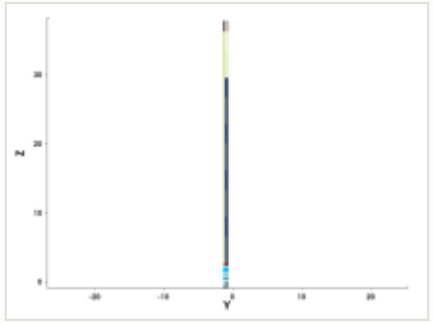

y cut at -1.035 µm

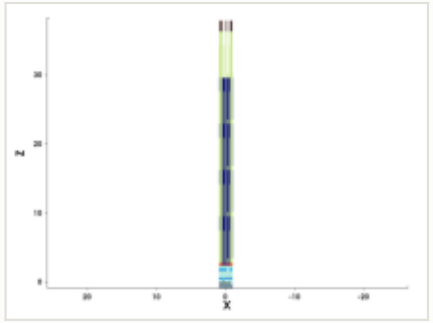

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

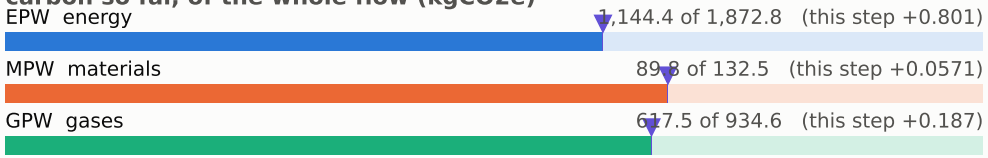

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

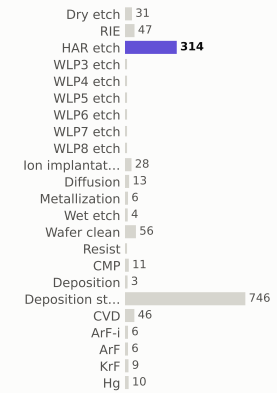

materials deposited (g)

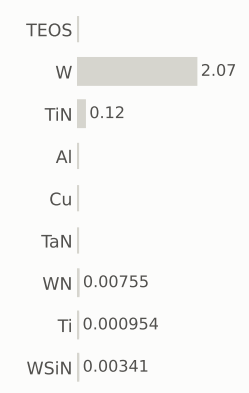

gases emitted (g)

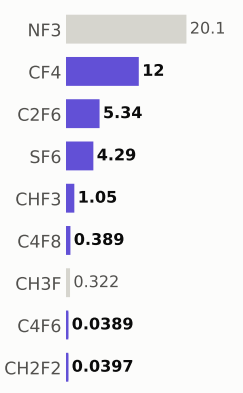

Step #17842.0134: HAR_etch

etch_noop · HAR_etch

1.04	1,852.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

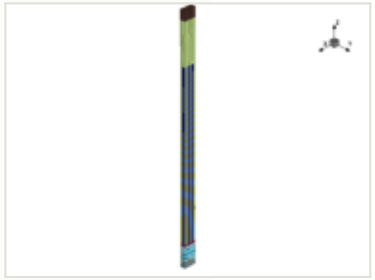

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

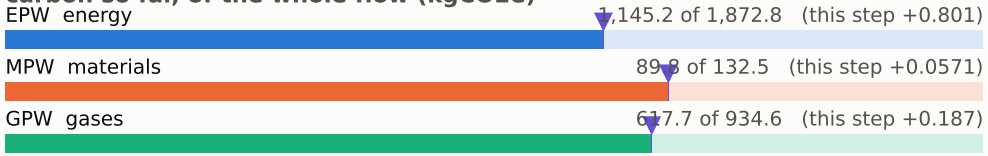

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

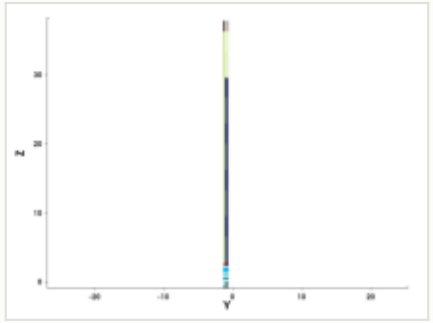

y cut at -1.035 µm

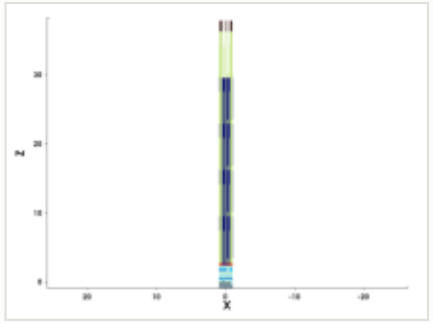

mask for this step

no mask for this step

steps by process area

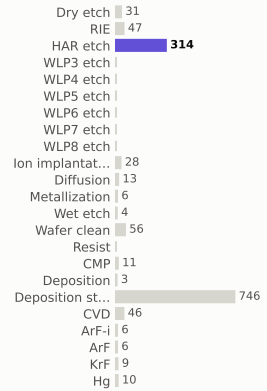

materials deposited (g)

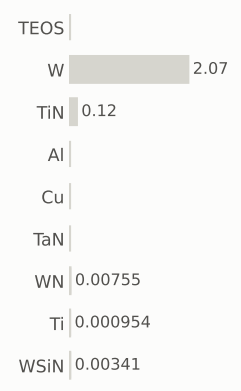

gases emitted (g)

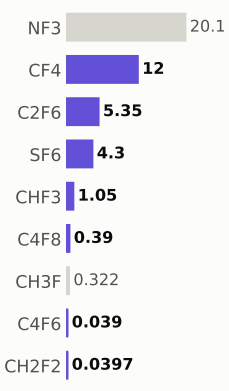

Step #17842.0805: HAR_etch

etch_noop · HAR_etch

1.04	1,853.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

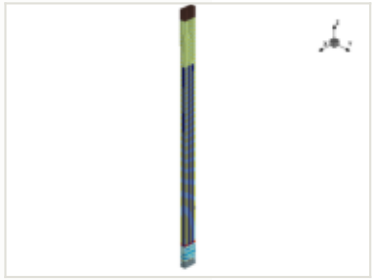

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

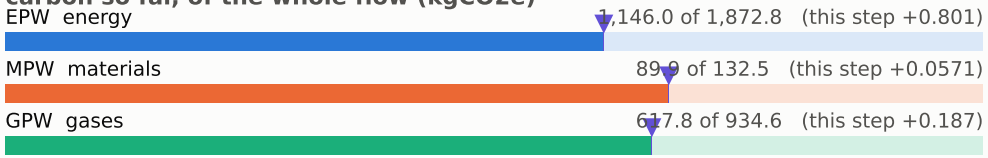

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

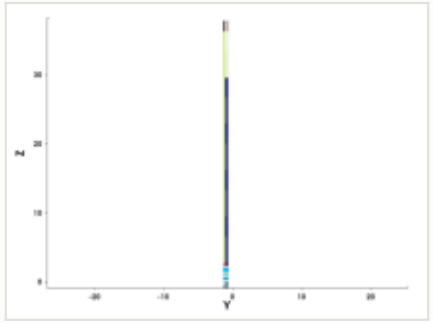

y cut at -1.035 µm

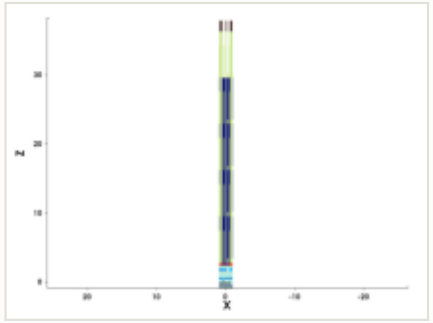

mask for this step

no mask for this step

steps by process area

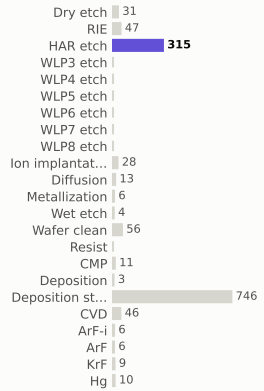

materials deposited (g)

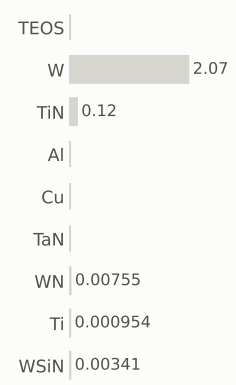

gases emitted (g)

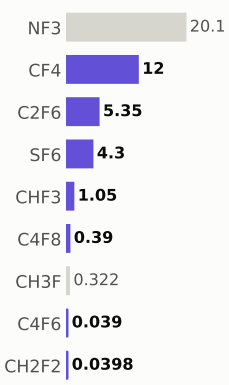

Step #17842.1477: HAR_etch

etch_noop · HAR_etch

1.04	1,854.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

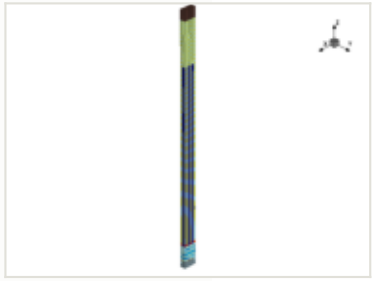

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

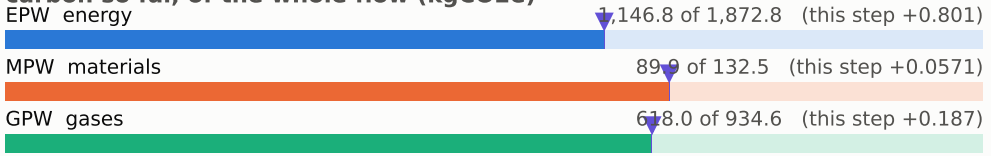

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

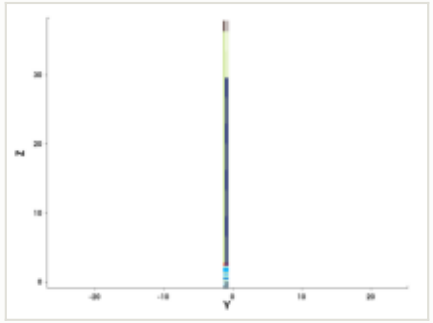

y cut at -1.035 µm

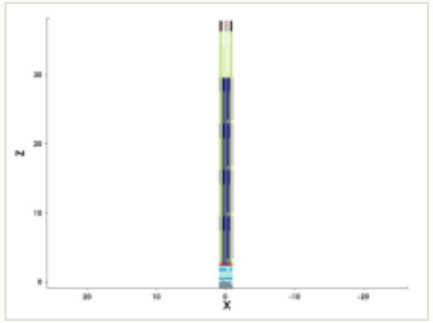

mask for this step

no mask for this step

steps by process area

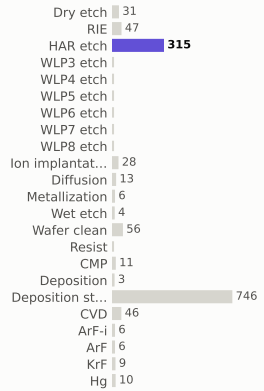

materials deposited (g)

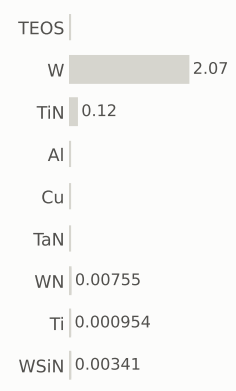

gases emitted (g)

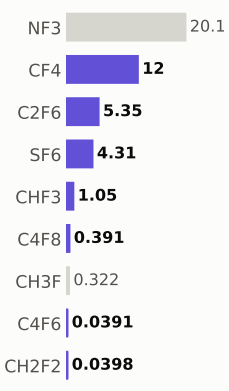

Step #17842.2148: HAR_etch

etch_noop · HAR_etch

1.04	1,855.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

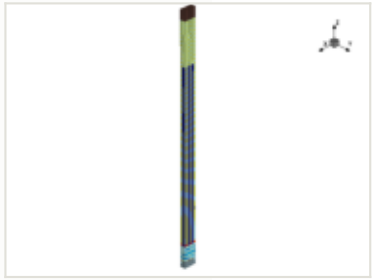

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

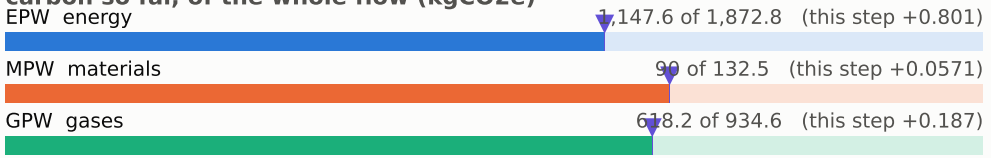

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

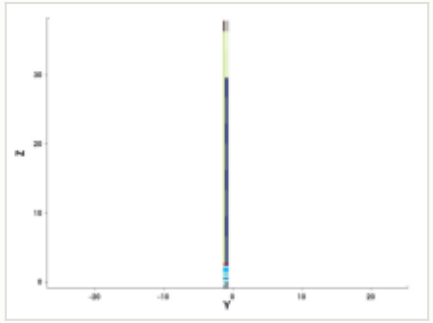

y cut at -1.035 µm

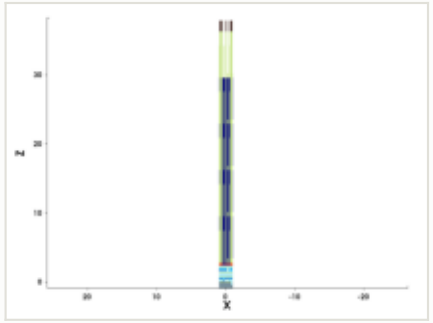

mask for this step

no mask for this step

steps by process area

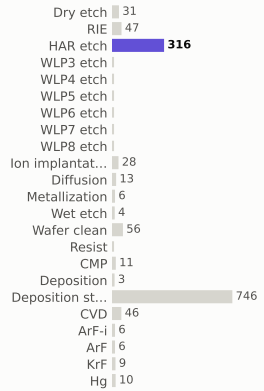

materials deposited (g)

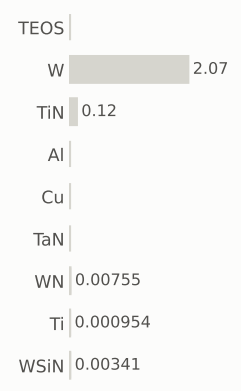

gases emitted (g)

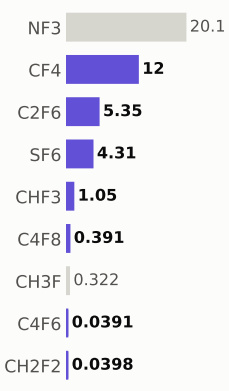

Step #17842.2819: HAR_etch

etch_noop · HAR_etch

1.04	1,856.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

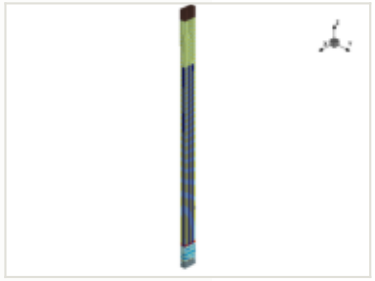

x cut at 0.000 µm

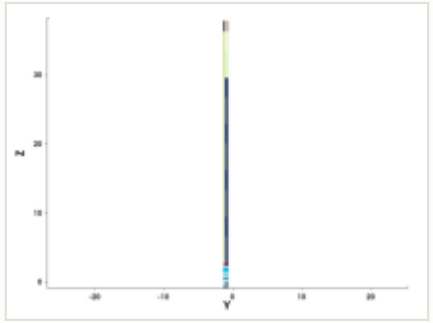

y cut at -1.035 µm

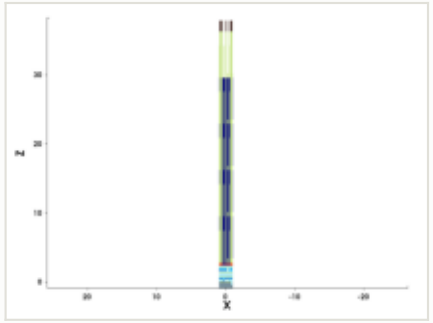

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

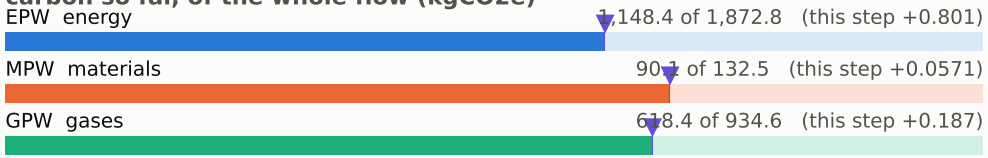

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

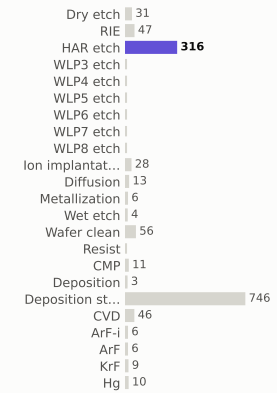

materials deposited (g)

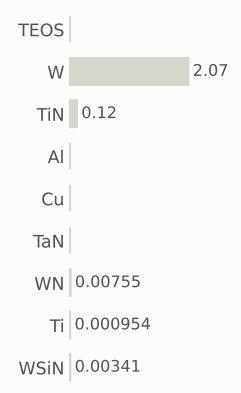

gases emitted (g)

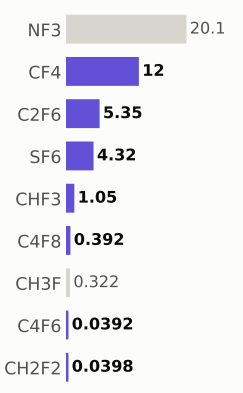

Step #17842.349: HAR_etch

etch_noop · HAR_etch

1.04	1,857.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

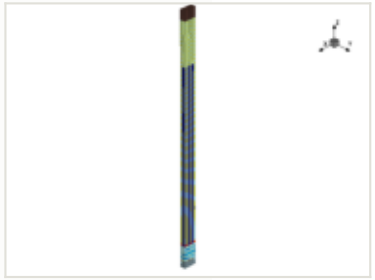

x cut at 0.000 µm

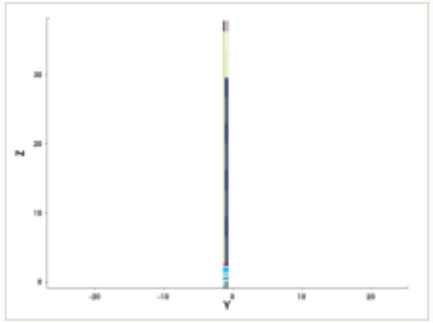

y cut at -1.035 µm

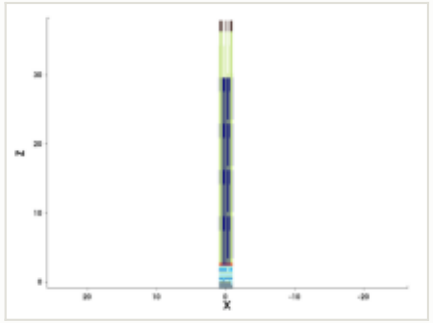

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

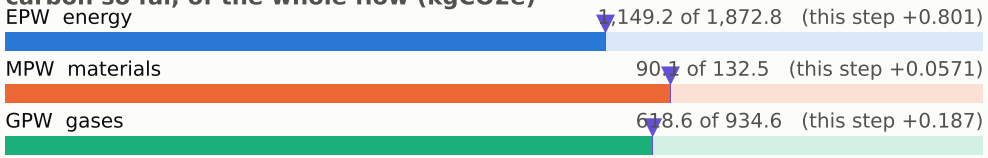

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

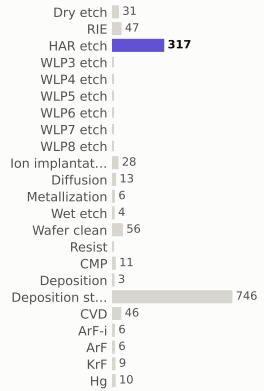

materials deposited (g)

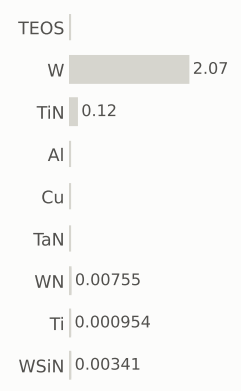

gases emitted (g)

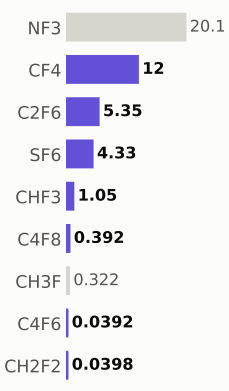

Step #17842.4161: HAR_etch

etch_noop · HAR_etch

1.04	1,859.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

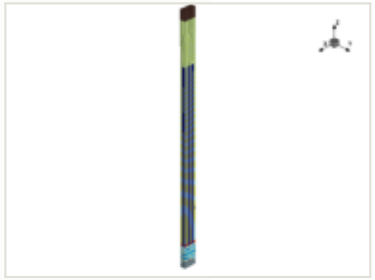

x cut at 0.000 µm

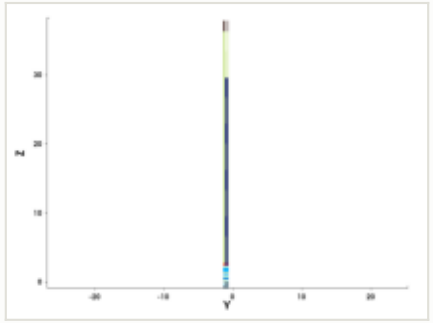

y cut at -1.035 µm

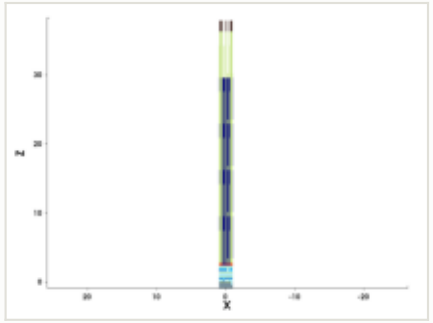

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

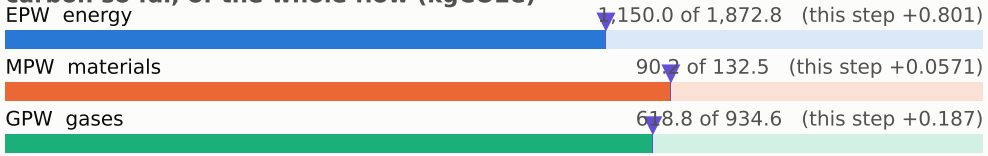

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

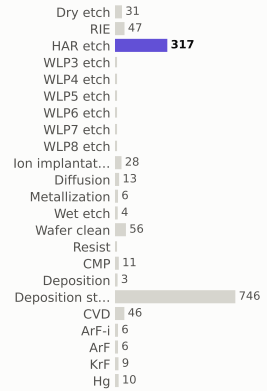

materials deposited (g)

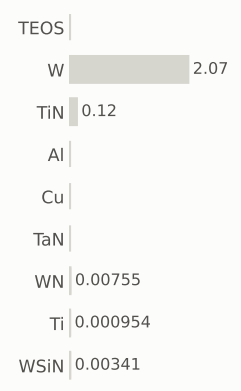

gases emitted (g)

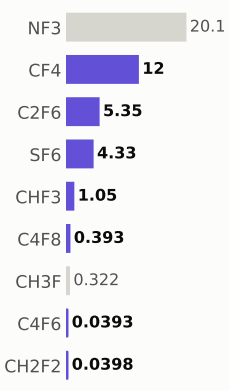

Step #17842.4832: HAR_etch

etch_noop · HAR_etch

1.04	1,860.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

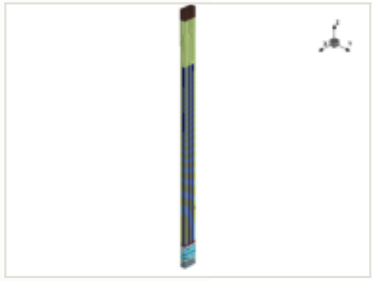

x cut at 0.000 µm

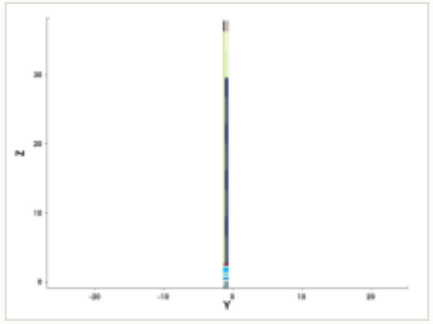

y cut at -1.035 µm

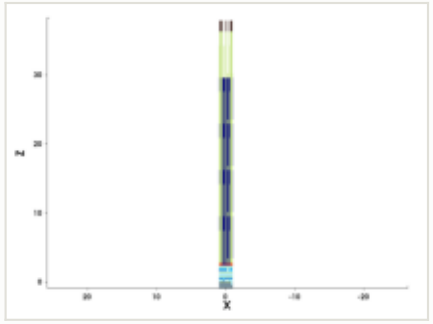

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

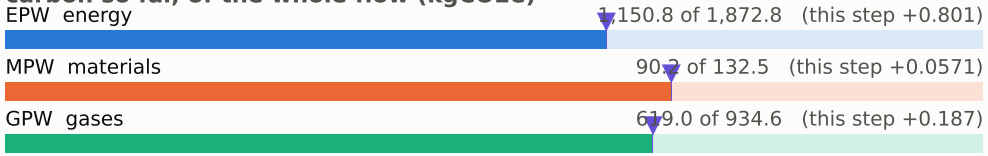

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

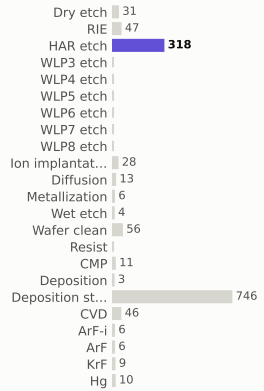

materials deposited (g)

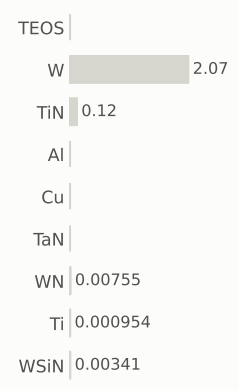

gases emitted (g)

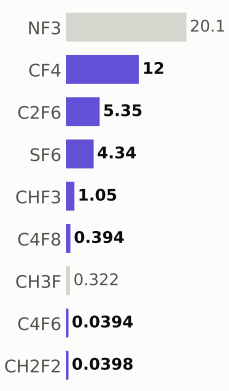

Step #17842.5503: HAR_etch

etch_noop · HAR_etch

1.04	1,861.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

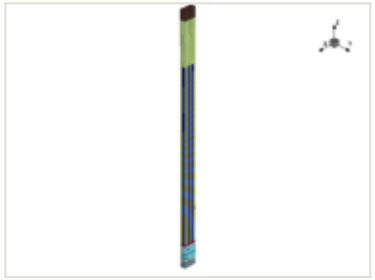



x cut at 0.000 µm

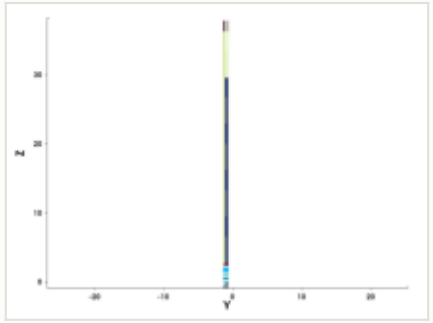

y cut at -1.035 µm

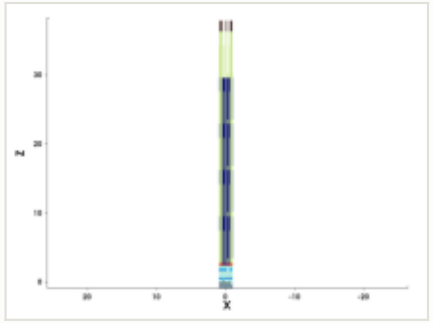

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

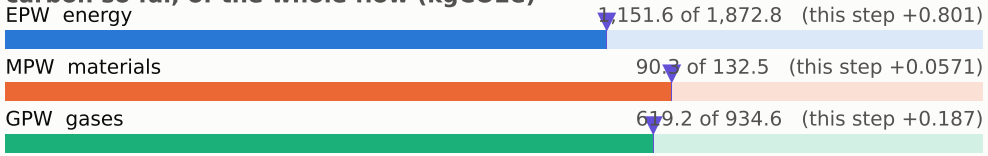

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

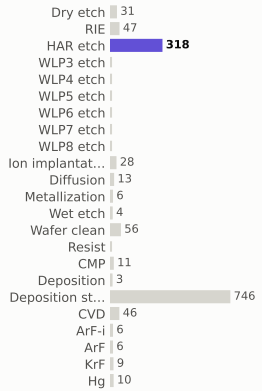

materials deposited (g)

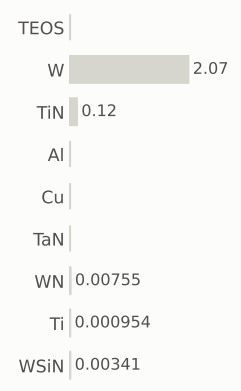

gases emitted (g)

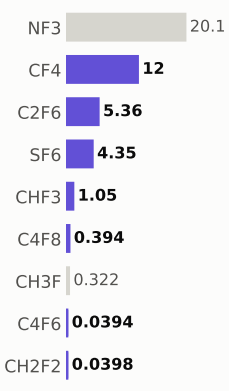

Step #17842.6174: HAR_etch

etch_noop · HAR_etch

1.04	1,862.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

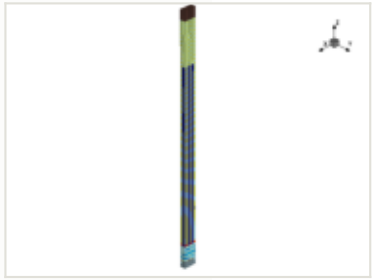

x cut at 0.000 µm

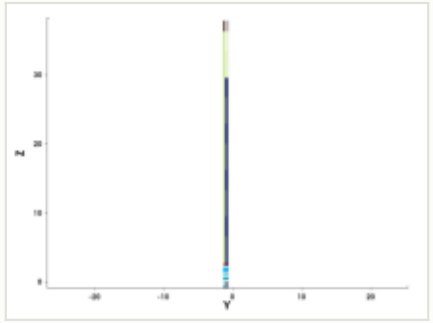

y cut at -1.035 µm

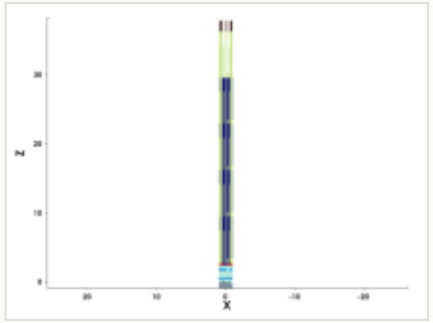

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

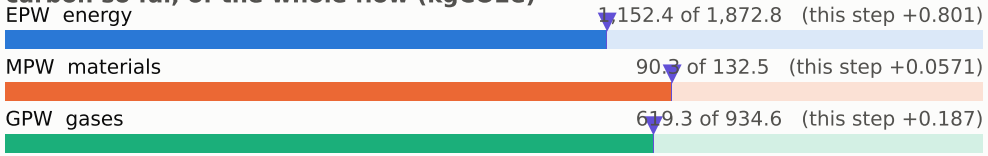

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

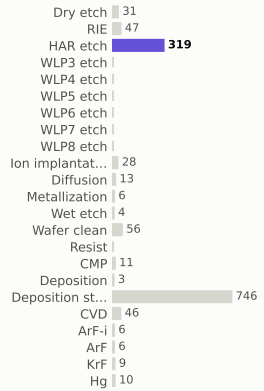

materials deposited (g)

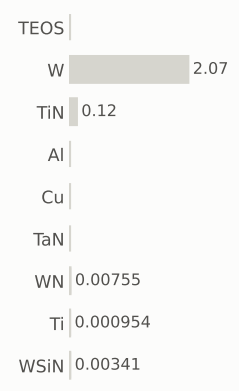

gases emitted (g)

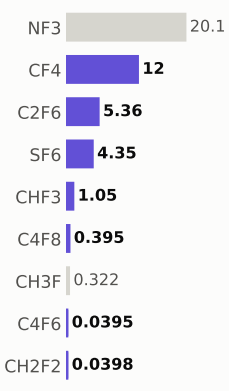

Step #17842.6846: HAR_etch

etch_noop · HAR_etch

1.04	1,863.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

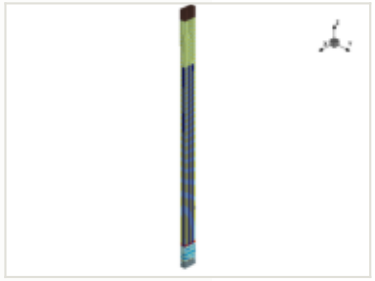

x cut at 0.000 µm

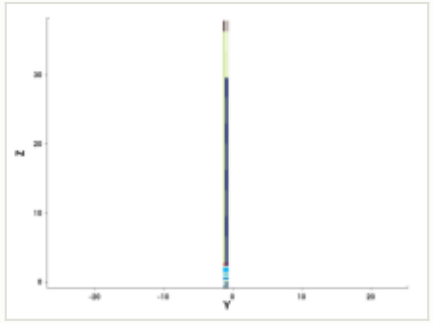

y cut at -1.035 µm

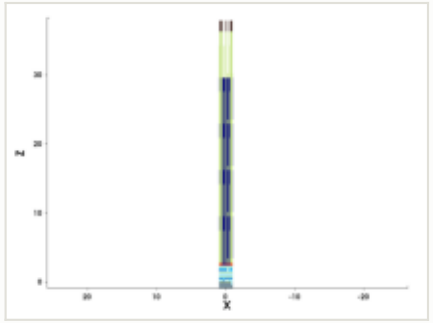

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

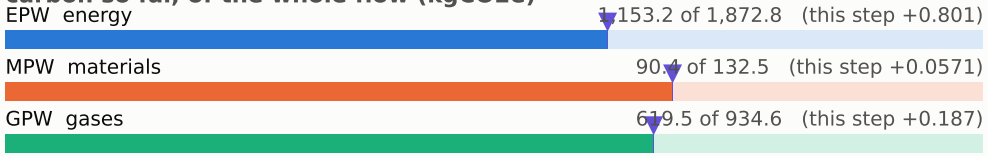

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

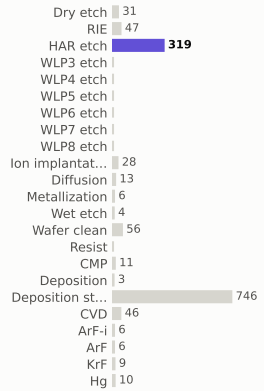

materials deposited (g)

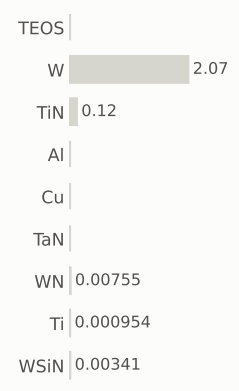

gases emitted (g)

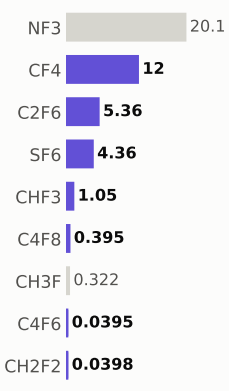

Step #17842.7517: HAR_etch

etch_noop · HAR_etch

1.04	1,864.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

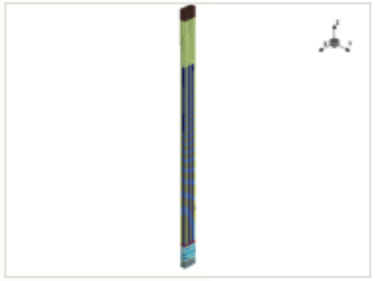

x cut at 0.000 µm

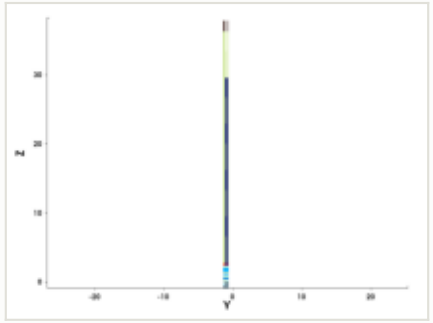

y cut at -1.035 µm

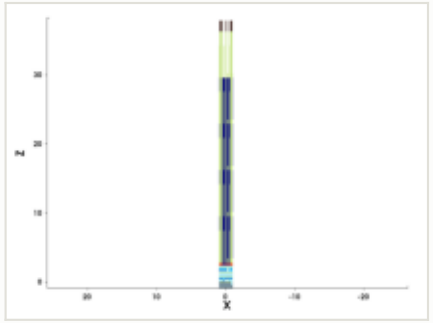

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

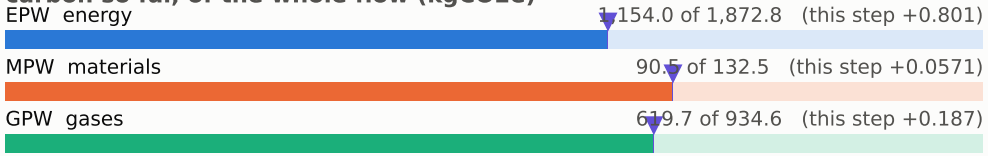

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

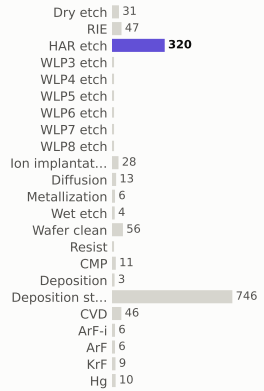

materials deposited (g)

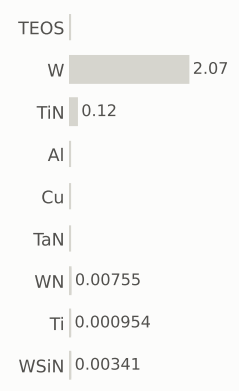

gases emitted (g)

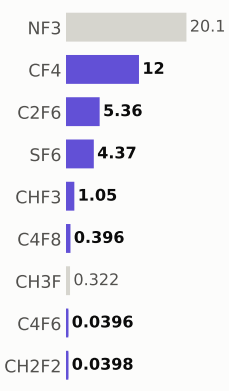

Step #17842.8188: HAR_etch

etch_noop · HAR_etch

1.04	1,865.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

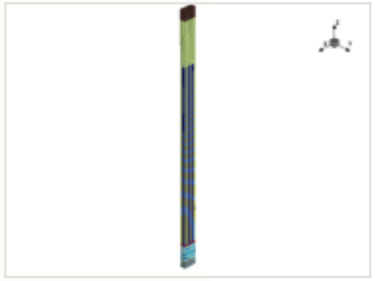

x cut at 0.000 µm

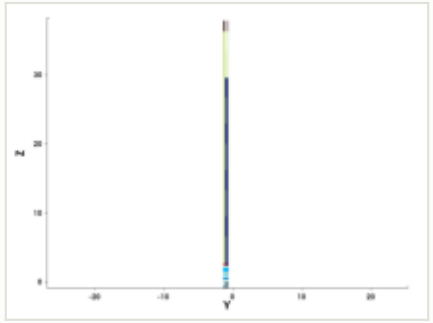

y cut at -1.035 µm

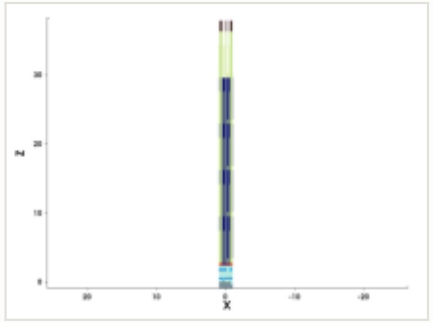

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

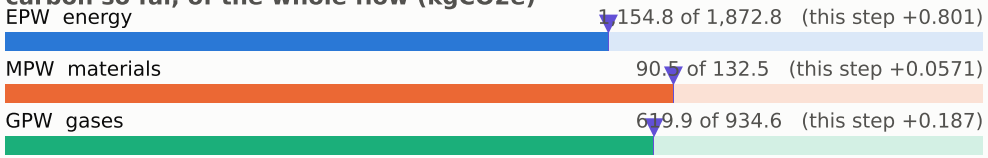

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

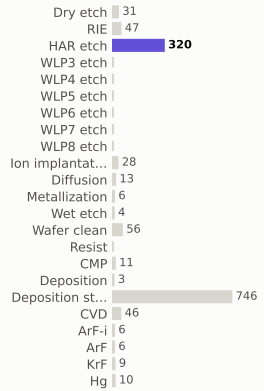

materials deposited (g)

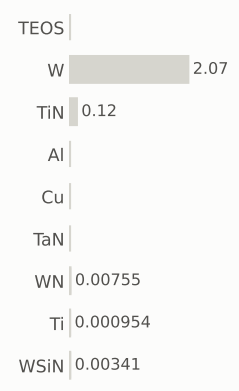

gases emitted (g)

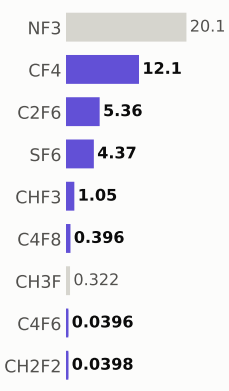

Step #17842.8859: HAR_etch

etch_noop · HAR_etch

1.04	1,866.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

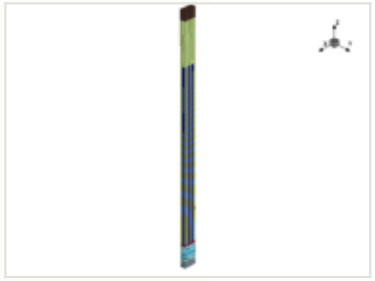

x cut at 0.000 µm

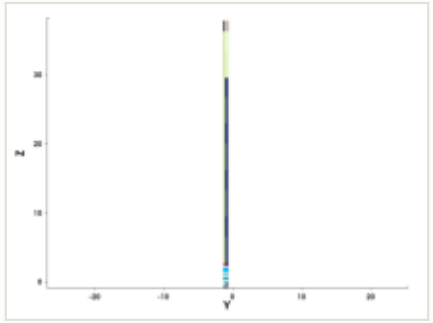

y cut at -1.035 µm

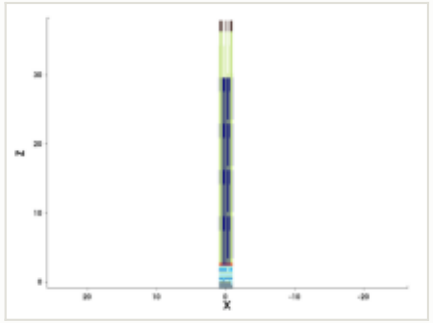

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

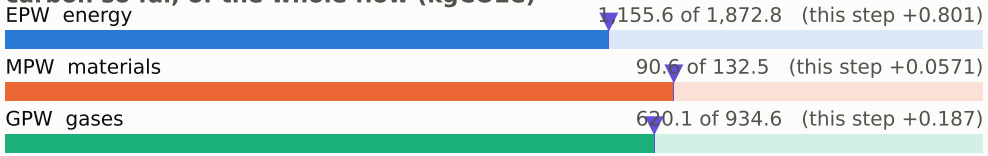

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

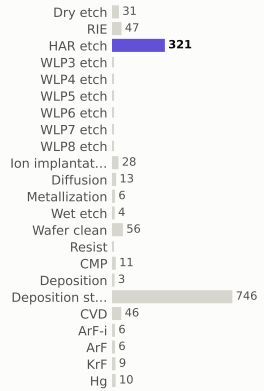

materials deposited (g)

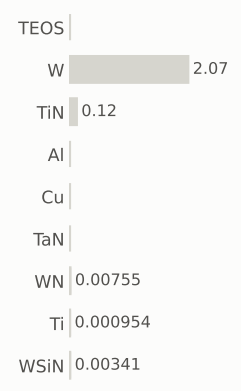

gases emitted (g)

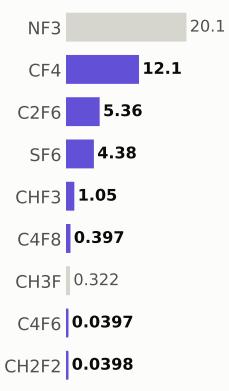

Step #17842.953: HAR_etch

etch_noop · HAR_etch

1.04	1,867.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

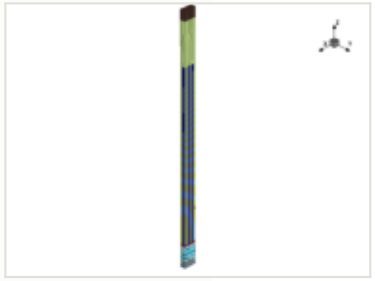

x cut at 0.000 µm

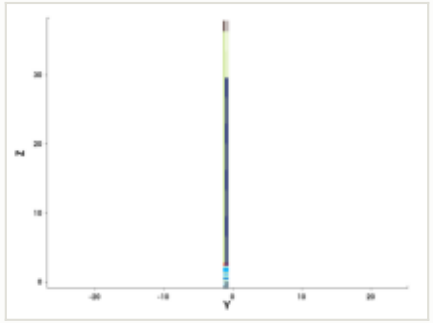

y cut at -1.035 µm

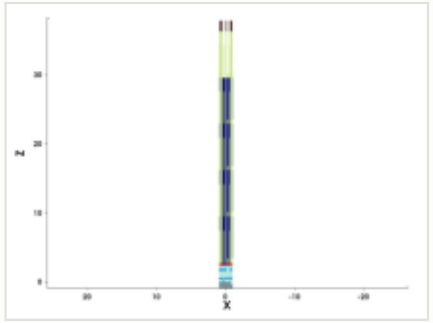

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

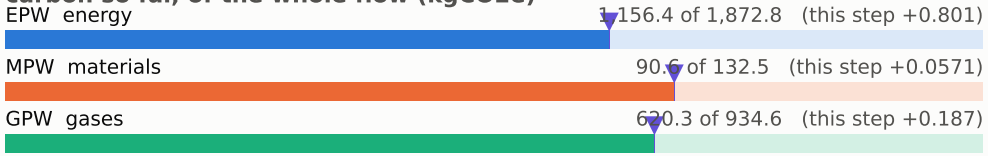

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

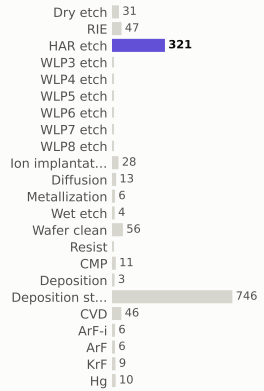

materials deposited (g)

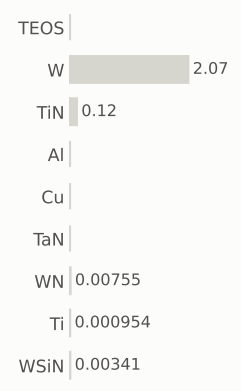

gases emitted (g)

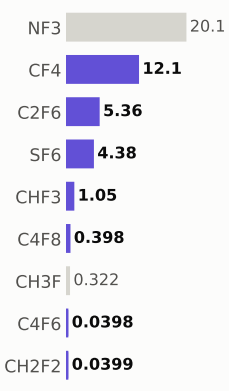

Step #17843.0201: HAR_etch

etch_noop · HAR_etch

1.04	1,868.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

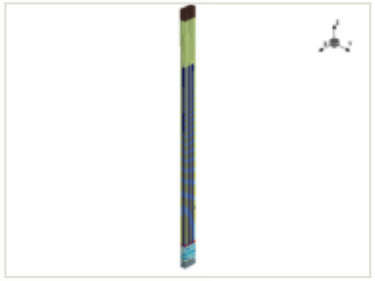

x cut at 0.000 µm

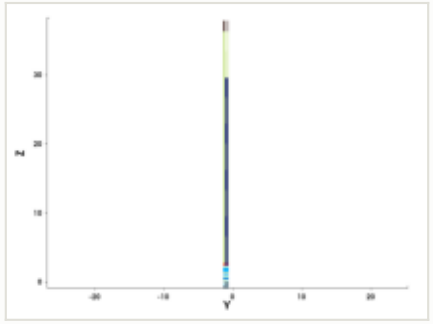

y cut at -1.035 µm

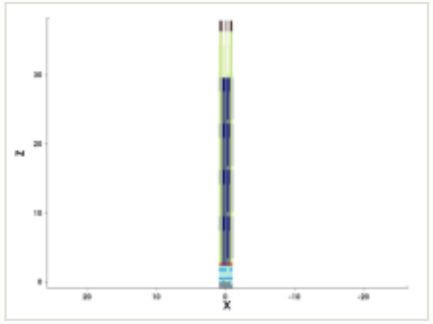

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

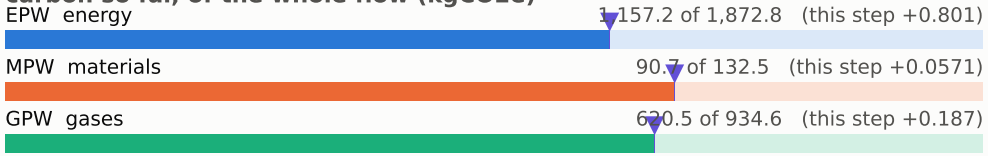

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

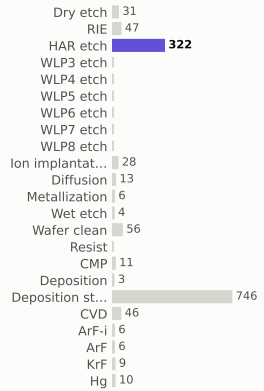

materials deposited (g)

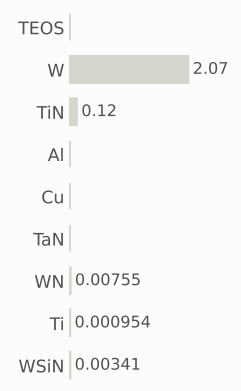

gases emitted (g)

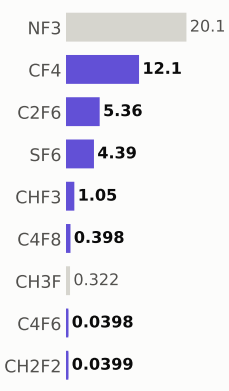

Step #17843.0872: HAR_etch

etch_noop · HAR_etch

1.04	1,869.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

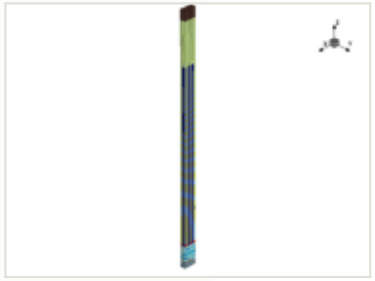

x cut at 0.000 µm

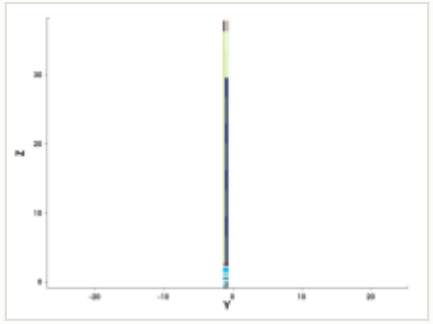

y cut at -1.035 µm

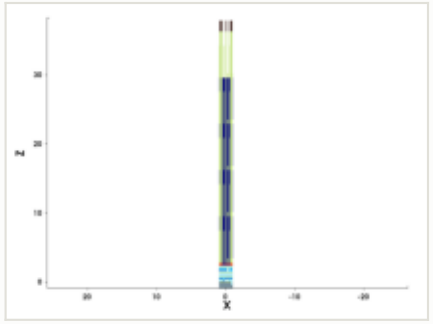

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

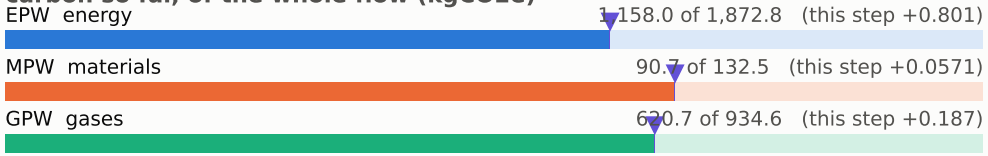

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

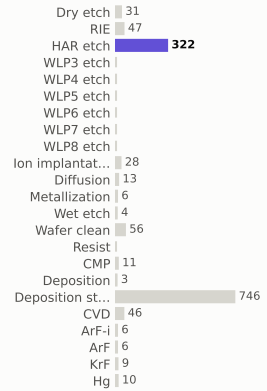

materials deposited (g)

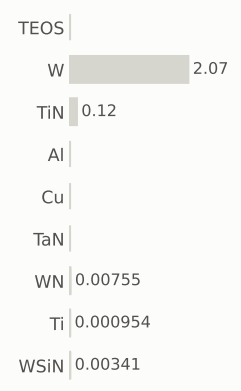

gases emitted (g)

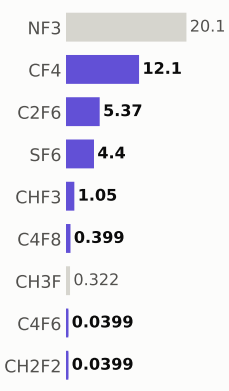

Step #17843.1544: HAR_etch

etch_noop · HAR_etch

1.04	1,870.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

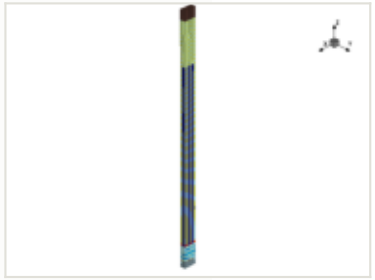

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

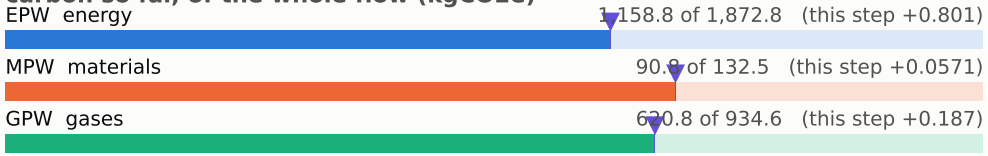

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

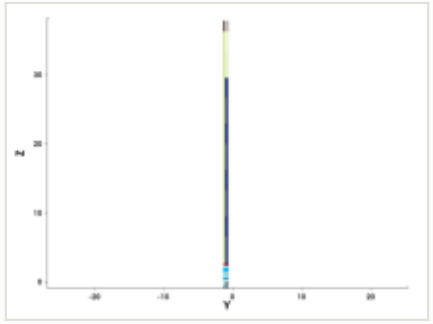

y cut at -1.035 µm

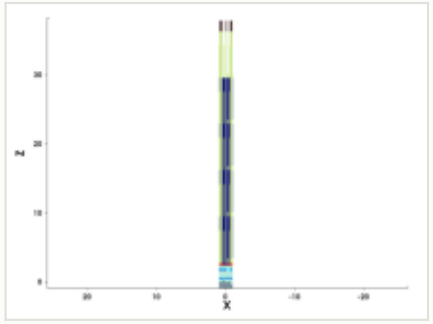

mask for this step

no mask for this step

steps by process area

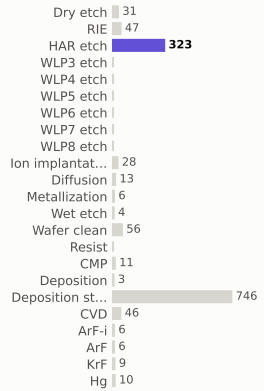

materials deposited (g)

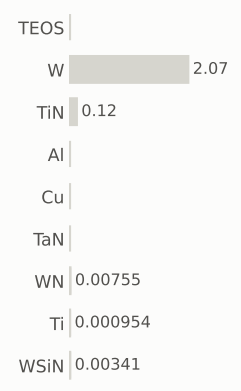

gases emitted (g)

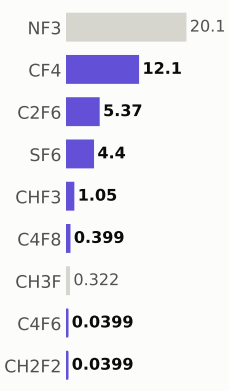

Step #17843.2215: HAR_etch

etch_noop · HAR_etch

1.04	1,871.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

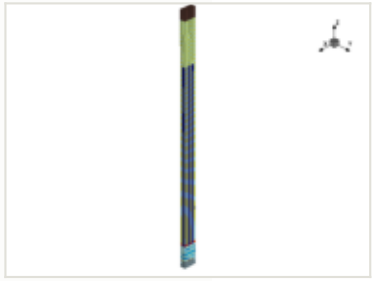

x cut at 0.000 µm

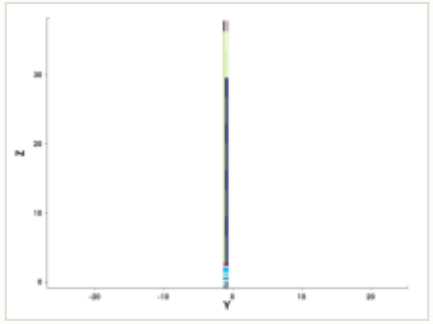

y cut at -1.035 µm

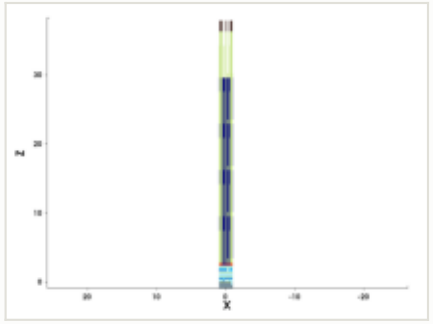

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

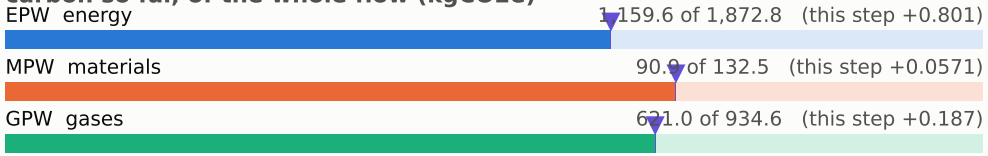

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

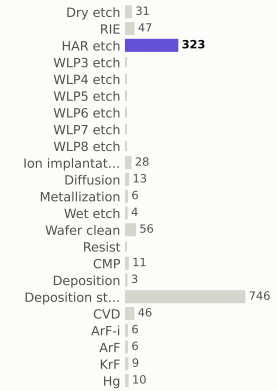

materials deposited (g)

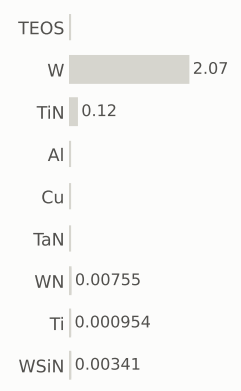

gases emitted (g)

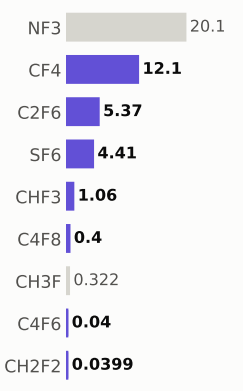

Step #17843.2886: HAR_etch

etch_noop · HAR_etch

1.04	1,872.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

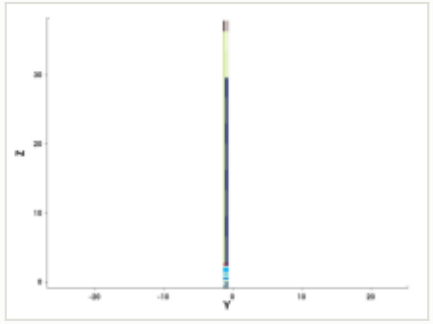

y cut at -1.035 µm

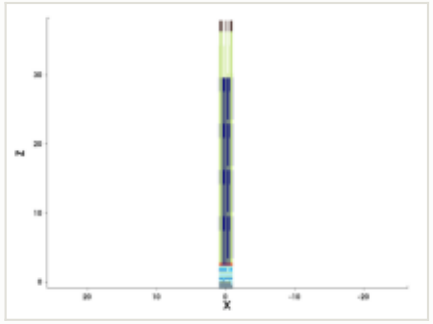

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

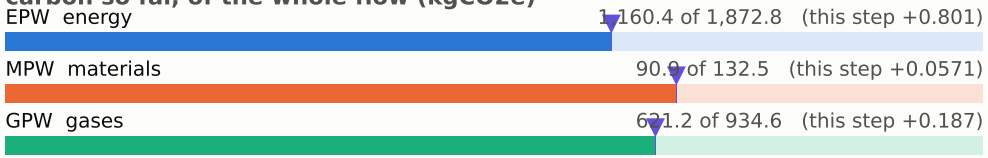

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

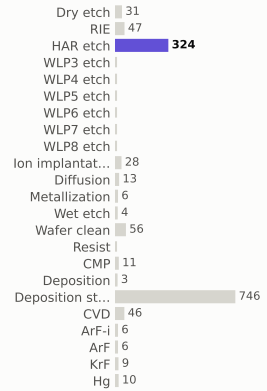

materials deposited (g)

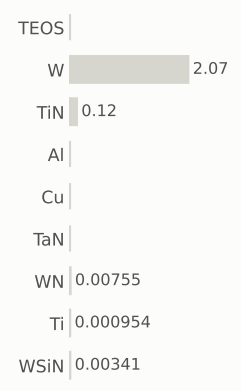

gases emitted (g)

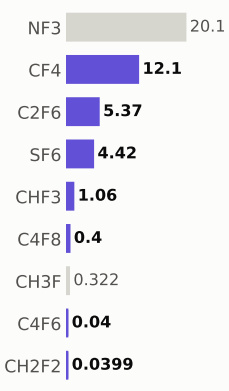

Step #17843.3557: HAR_etch

etch_noop · HAR_etch

1.04	1,873.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

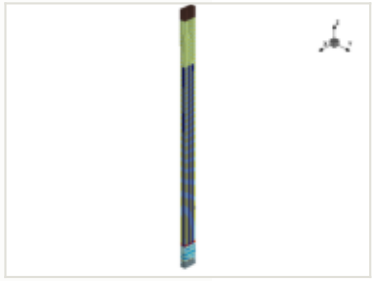

x cut at 0.000 µm

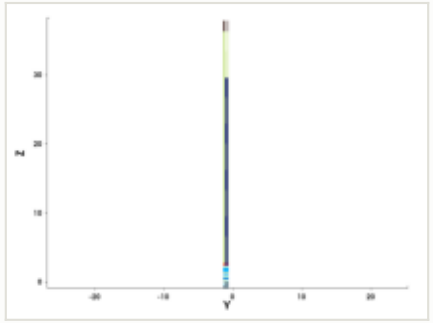

y cut at -1.035 µm

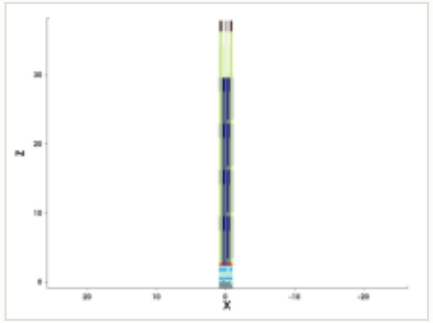

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

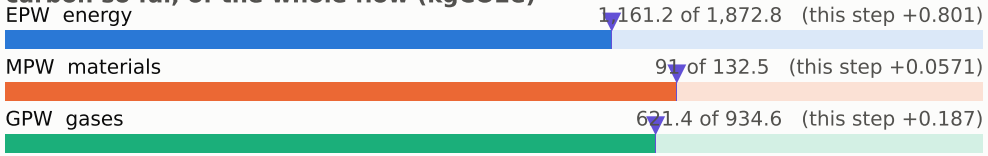

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

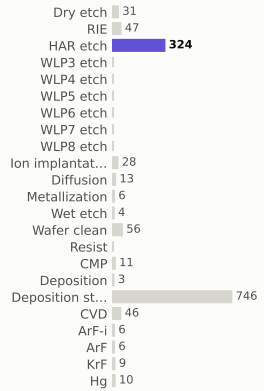

materials deposited (g)

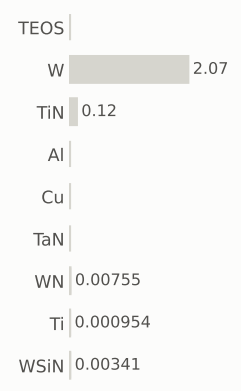

gases emitted (g)

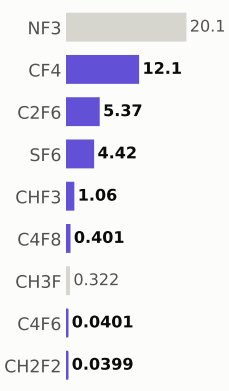

Step #17843.4228: HAR_etch

etch_noop · HAR_etch

1.04	1,874.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

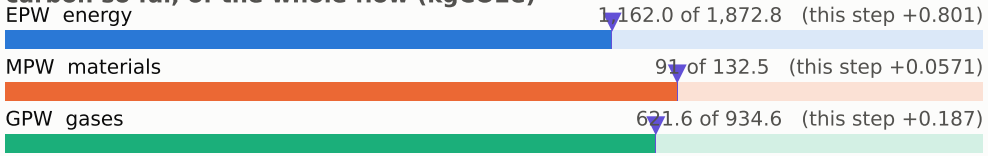

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

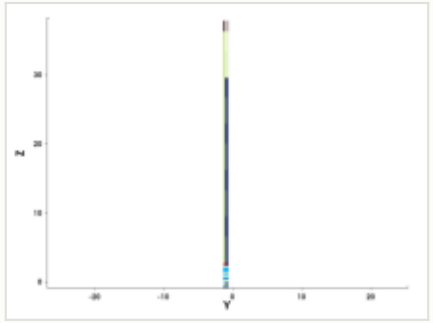

y cut at -1.035 µm

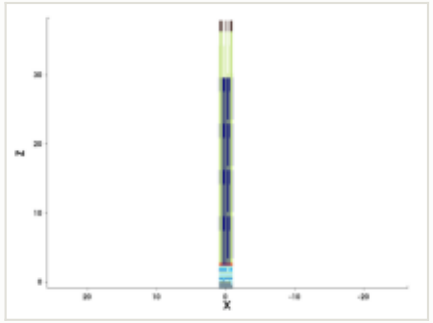

mask for this step

no mask for this step

steps by process area

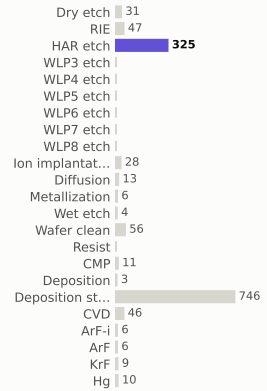

materials deposited (g)

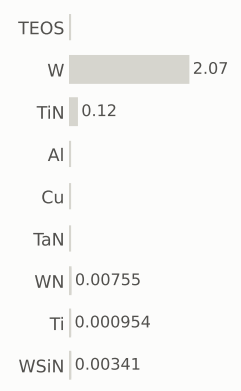

gases emitted (g)

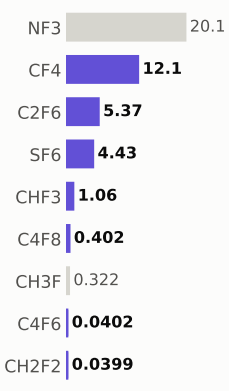

Step #17843.4899: HAR_etch

etch_noop · HAR_etch

1.04	1,875.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

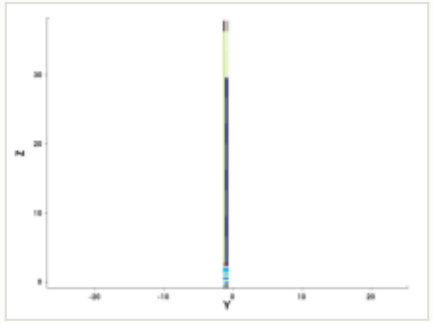

y cut at -1.035 µm

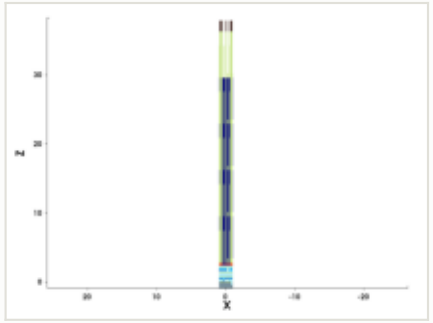

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

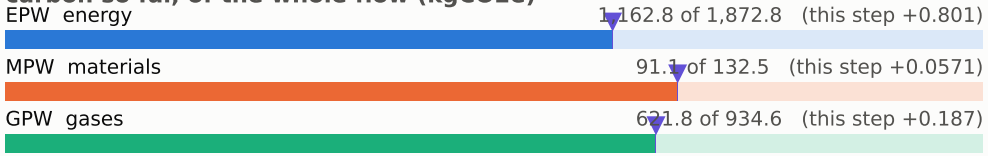

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

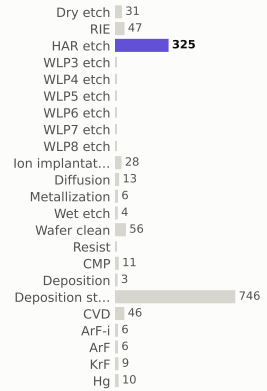

materials deposited (g)

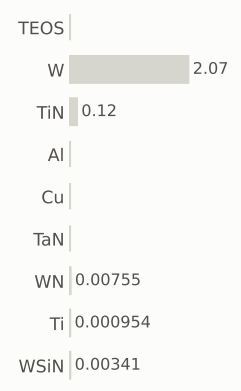

gases emitted (g)

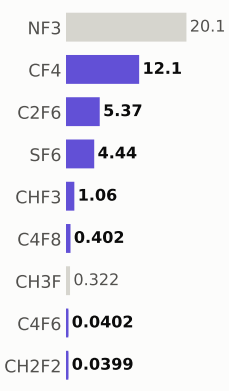

Step #17843.557: HAR_etch

etch_noop · HAR_etch

1.04	1,876.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

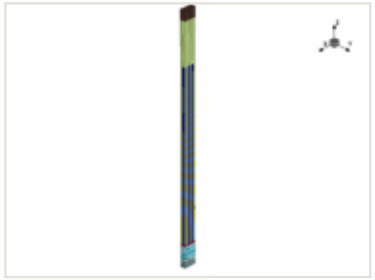

x cut at 0.000 µm

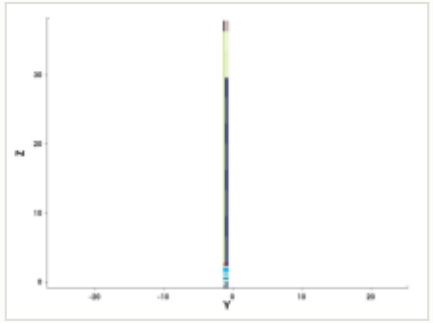

y cut at -1.035 µm

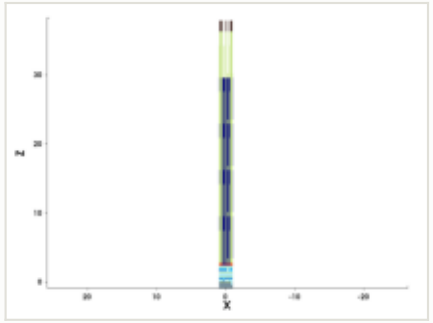

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

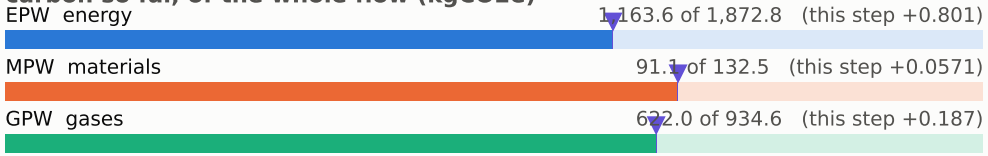

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

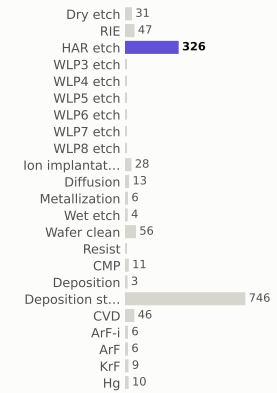

materials deposited (g)



gases emitted (g)



Step #17843.6242: HAR_etch

etch_noop · HAR_etch

1.04	1,877.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

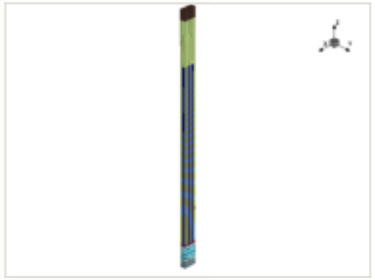



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

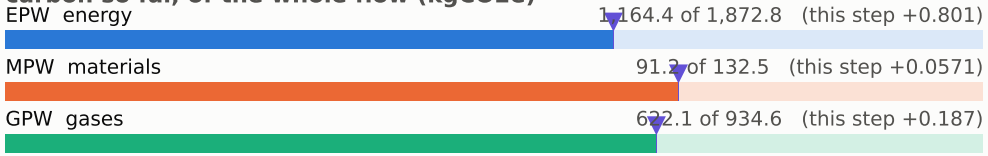

embodied carbon up to each step (kgCO2e per wafer)

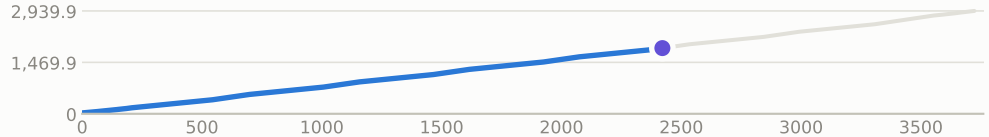

x cut at 0.000 µm

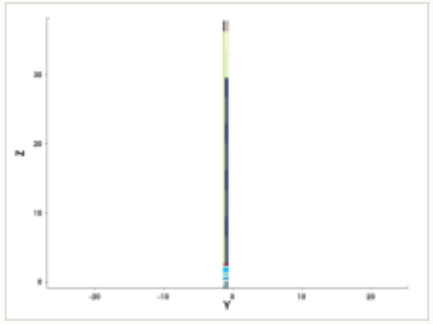

y cut at -1.035 µm

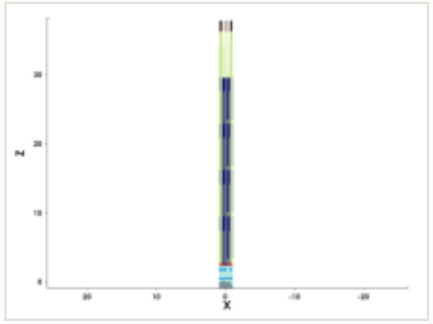

mask for this step

no mask for this step

steps by process area

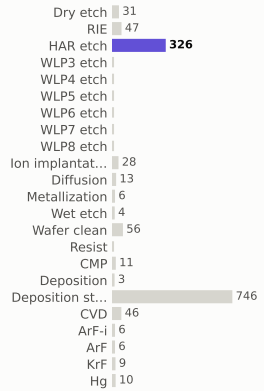

materials deposited (g)

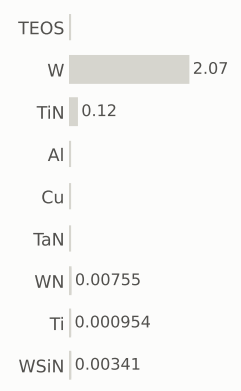

gases emitted (g)

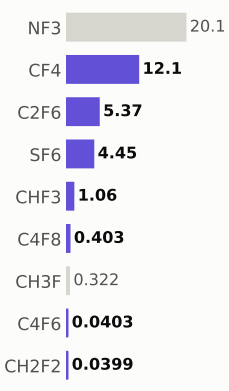

Step #17843.6913: HAR_etch

etch_noop · HAR_etch

1.04	1,878.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

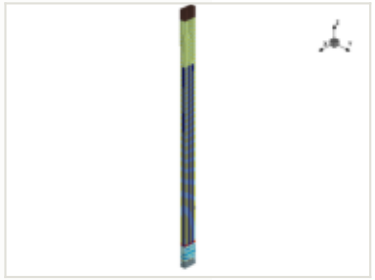

x cut at 0.000 µm

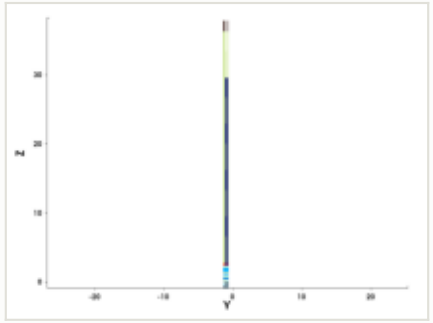

y cut at -1.035 µm

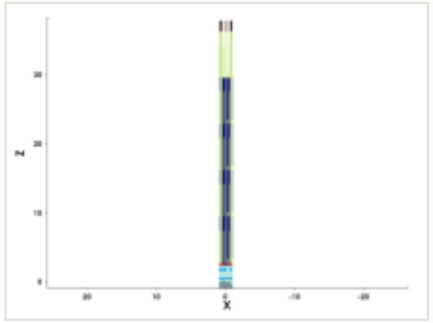

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

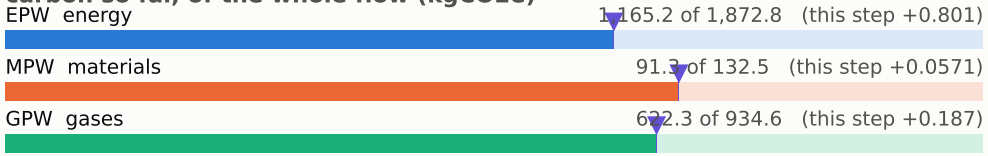

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

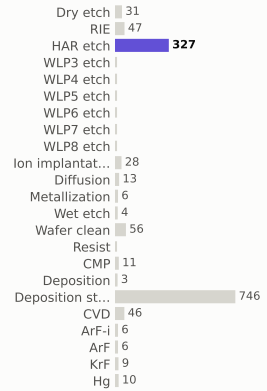

materials deposited (g)

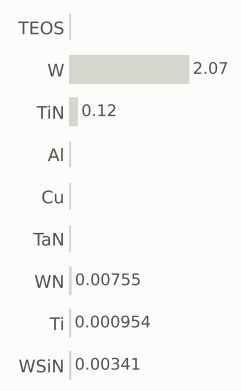

gases emitted (g)

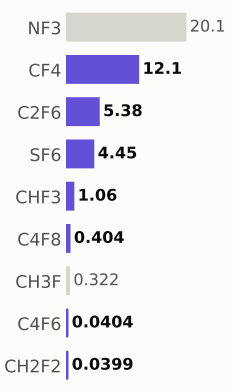

Step #17843.7584: HAR_etch

etch_noop · HAR_etch

1.04	1,879.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

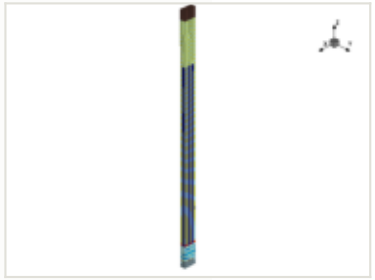

x cut at 0.000 µm

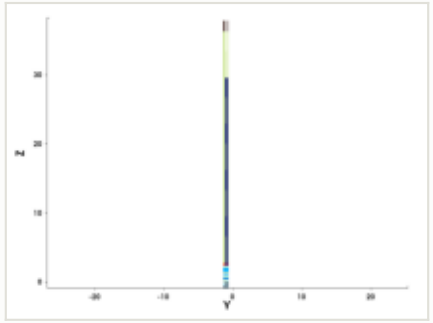

y cut at -1.035 µm

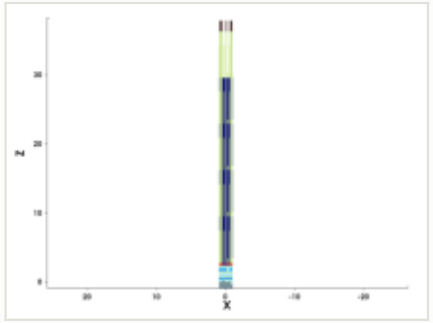

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

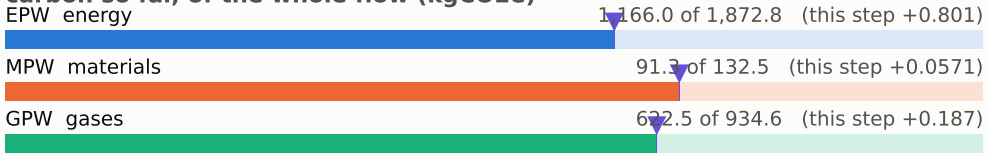

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

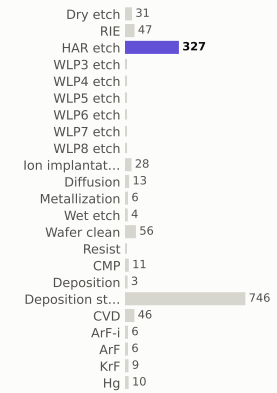

materials deposited (g)

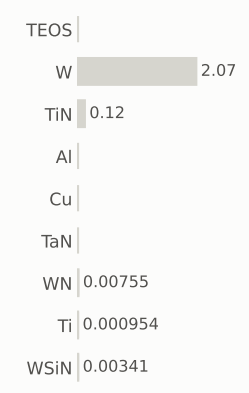

gases emitted (g)

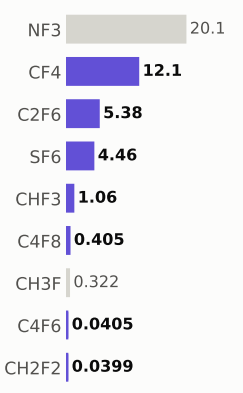

Step #17843.8255: HAR_etch

etch_noop · HAR_etch

1.04	1,880.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

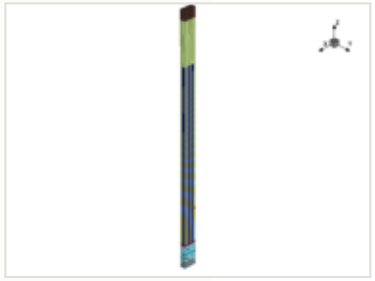

x cut at 0.000 µm

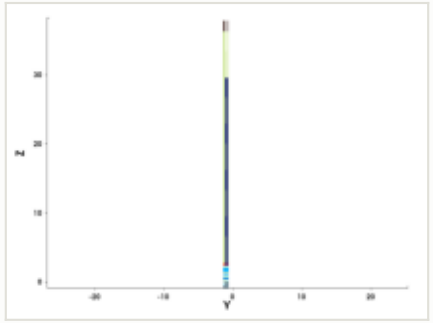

y cut at -1.035 µm

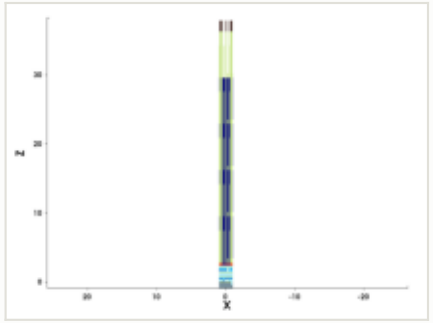

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

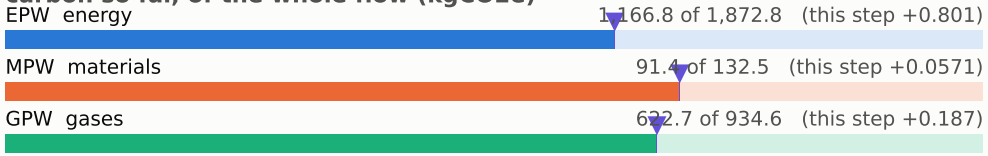

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

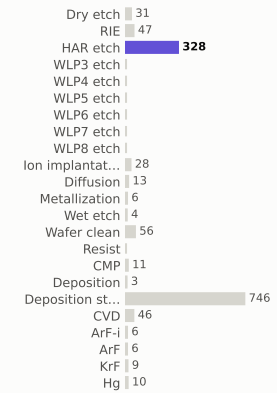

materials deposited (g)



gases emitted (g)

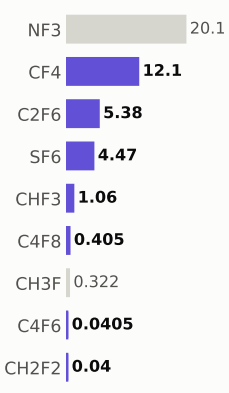

Step #17843.8926: HAR_etch

etch_noop · HAR_etch

1.04	1,882.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

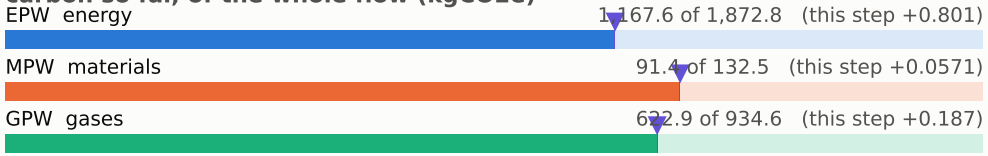

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

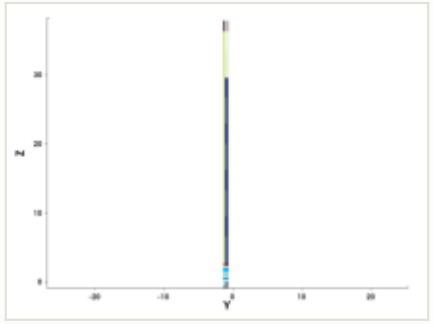

y cut at -1.035 µm

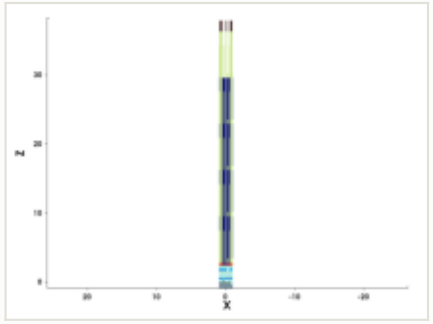

mask for this step

no mask for this step

steps by process area

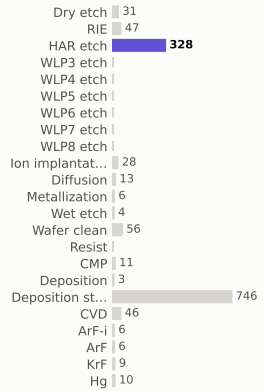

materials deposited (g)

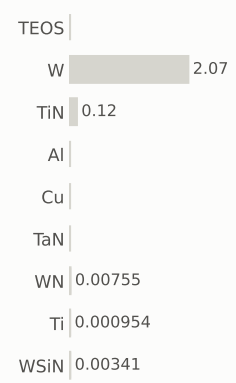

gases emitted (g)

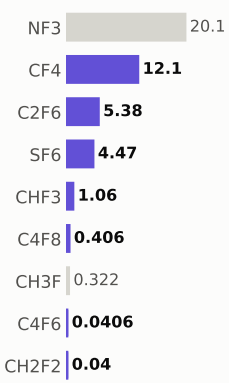

Step #17843.9597: HAR_etch

etch_noop · HAR_etch

1.04	1,883.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

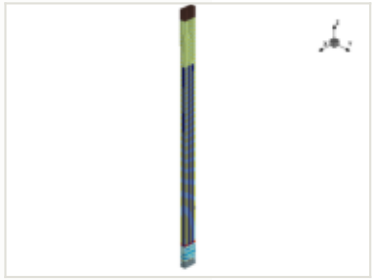

x cut at 0.000 µm

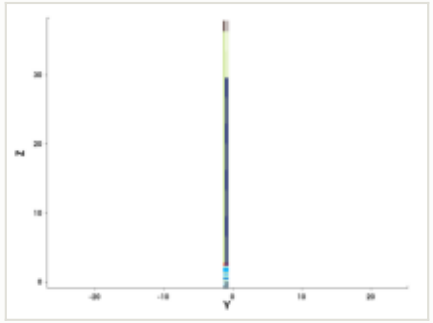

y cut at -1.035 µm

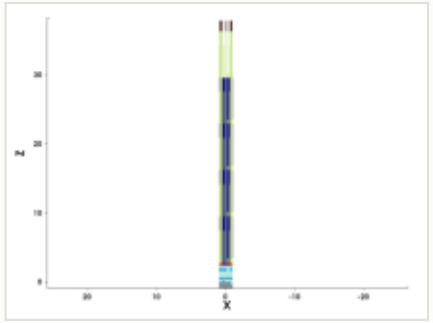

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

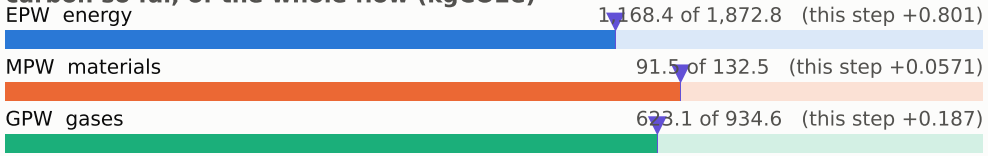

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

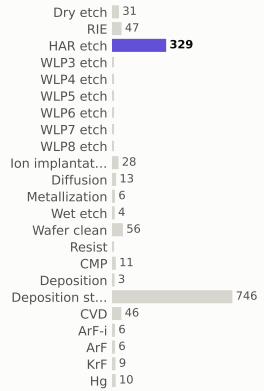

materials deposited (g)

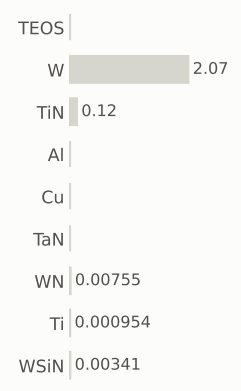

gases emitted (g)

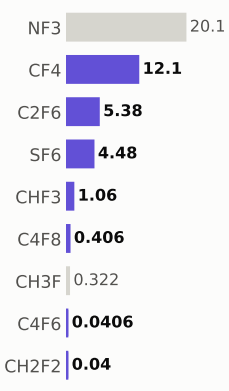

Step #17844.0268: HAR_etch

etch_noop · HAR_etch

1.04	1,884.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

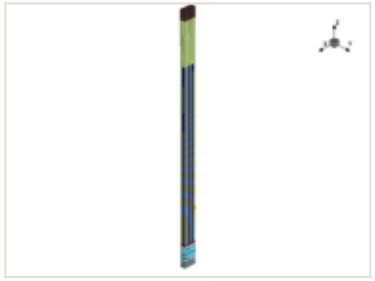

x cut at 0.000 µm

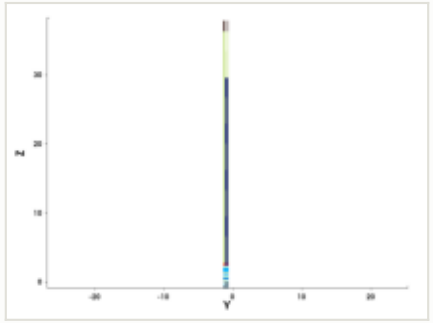

y cut at -1.035 µm

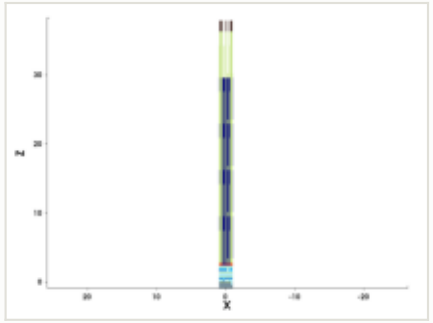

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

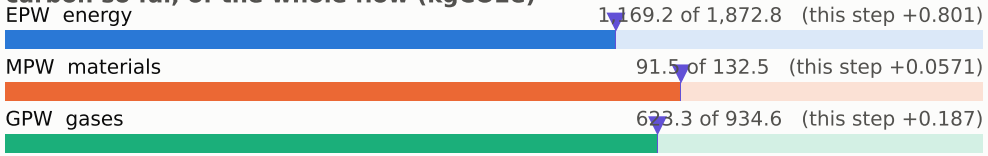

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

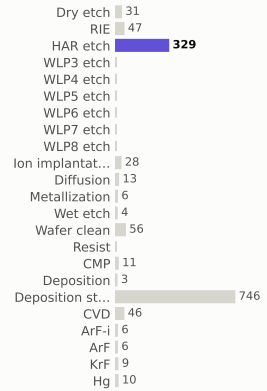

materials deposited (g)

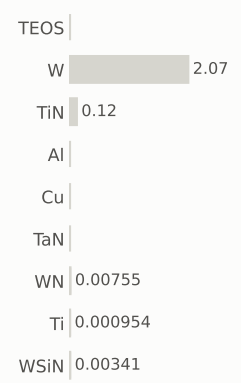

gases emitted (g)

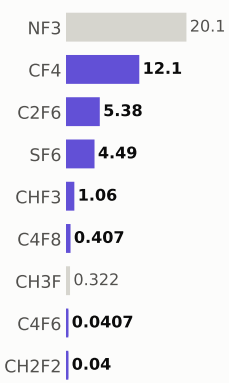

Step #17844.094: HAR_etch

etch_noop · HAR_etch

1.04	1,885.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

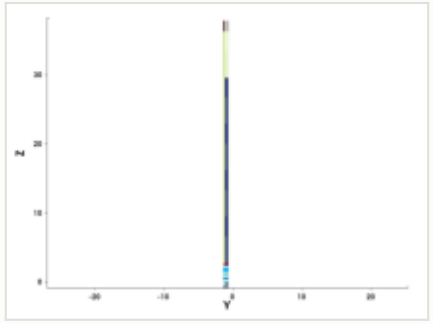

y cut at -1.035 µm

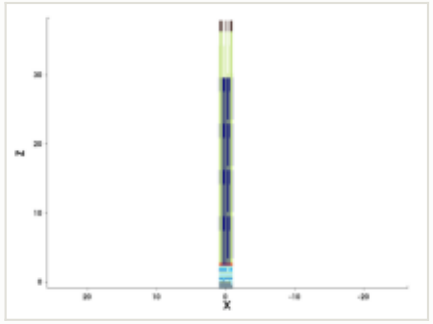

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

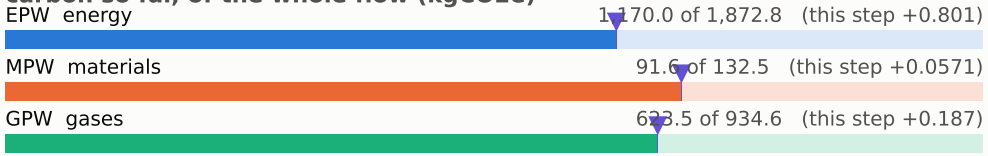

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

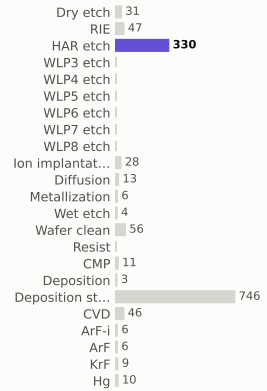

materials deposited (g)

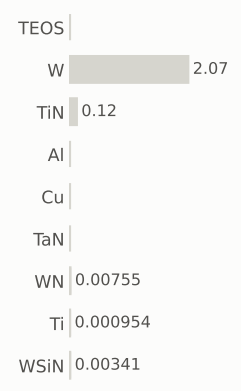

gases emitted (g)

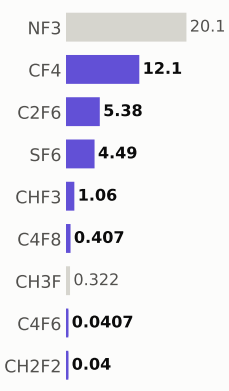

Step #17844.1611: HAR_etch

etch_noop · HAR_etch

1.04	1,886.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

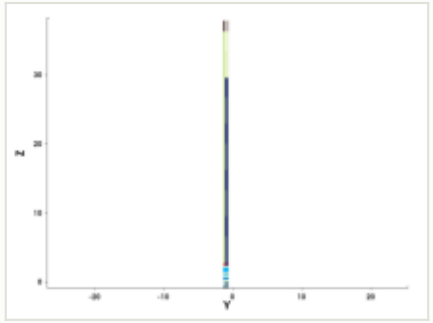

y cut at -1.035 µm

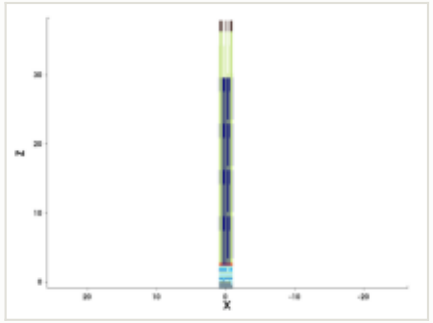

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

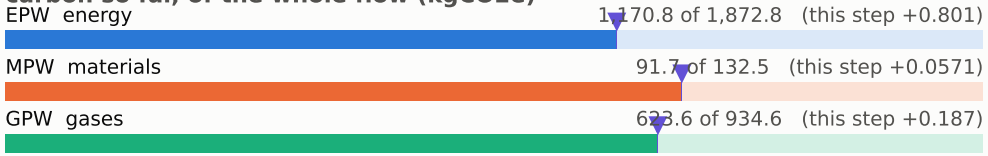

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

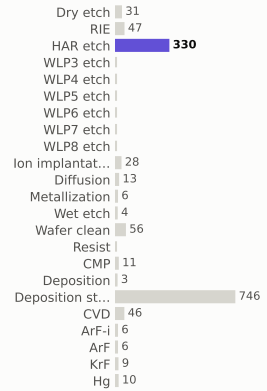

materials deposited (g)

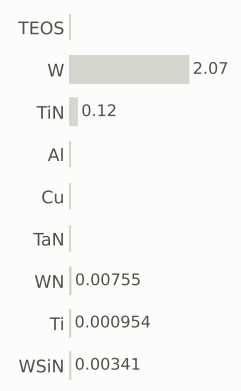

gases emitted (g)

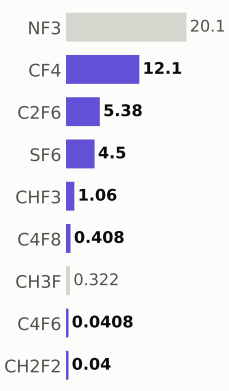

Step #17844.2282: HAR_etch

etch_noop · HAR_etch

1.04	1,887.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

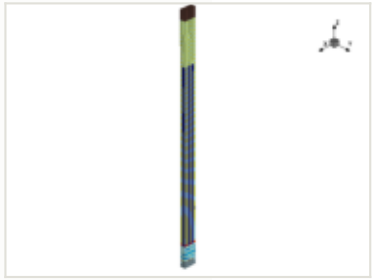

x cut at 0.000 µm

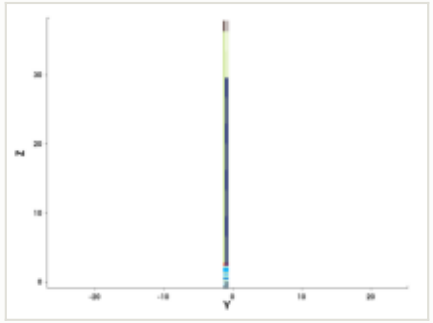

y cut at -1.035 µm

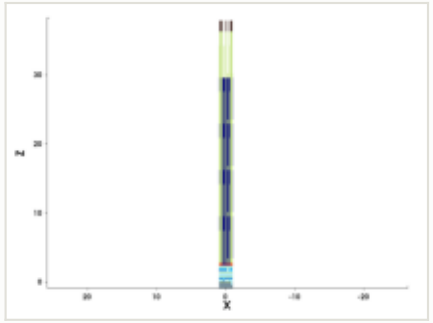

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

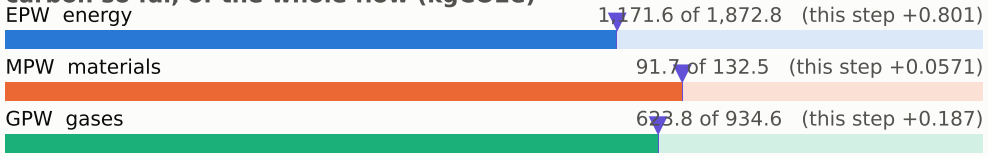

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

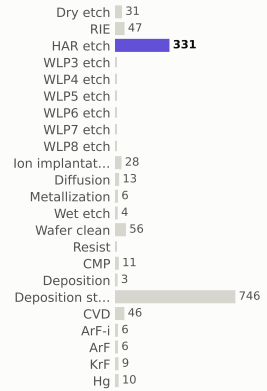

materials deposited (g)

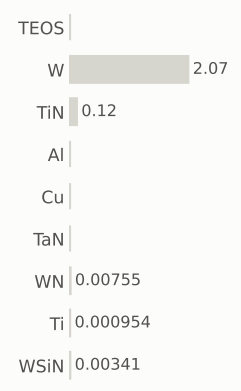

gases emitted (g)

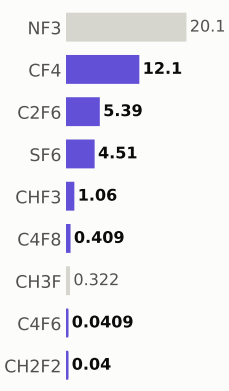

Step #17844.2953: HAR_etch

etch_noop · HAR_etch

1.04	1,888.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

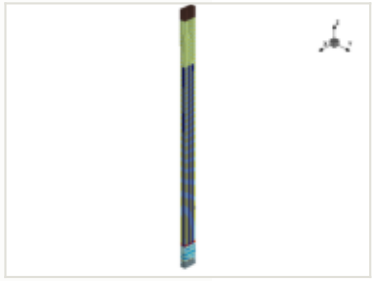

x cut at 0.000 µm

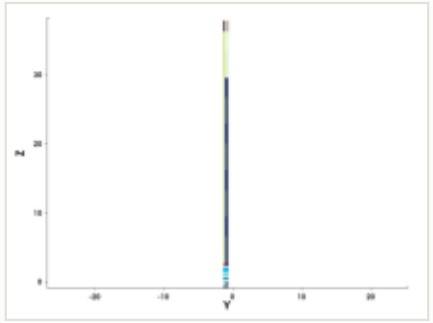

y cut at -1.035 µm

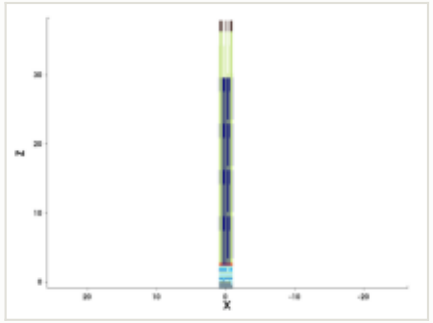

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

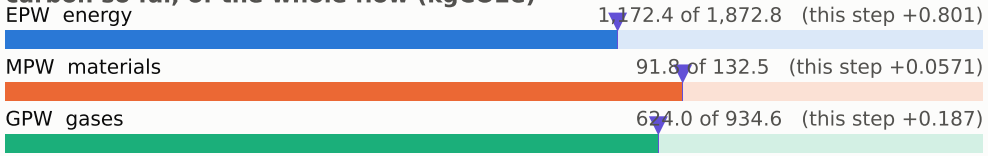

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

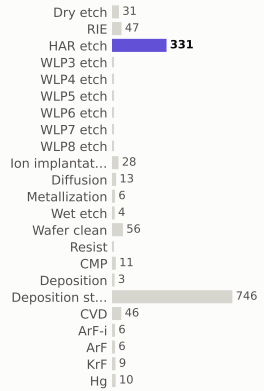

materials deposited (g)

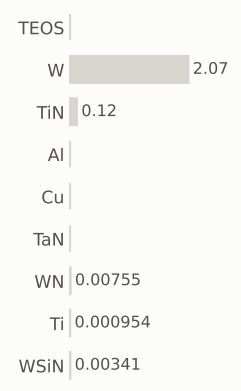

gases emitted (g)

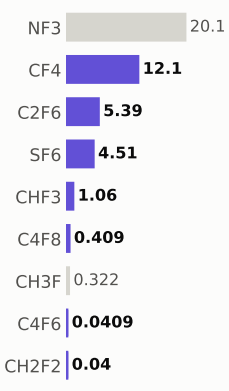

Step #17844.3624: HAR_etch

etch_noop · HAR_etch

1.04	1,889.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

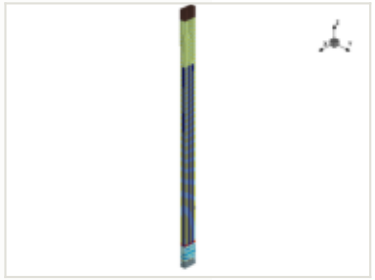

x cut at 0.000 µm

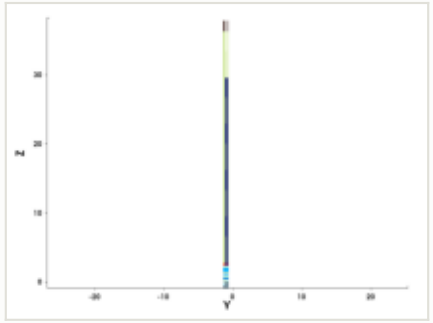

y cut at -1.035 µm

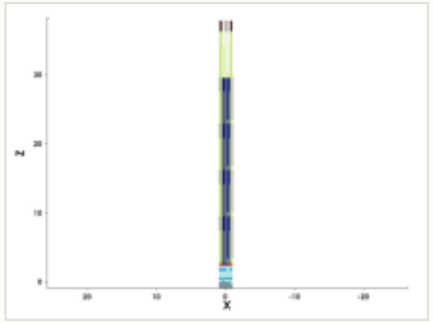

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

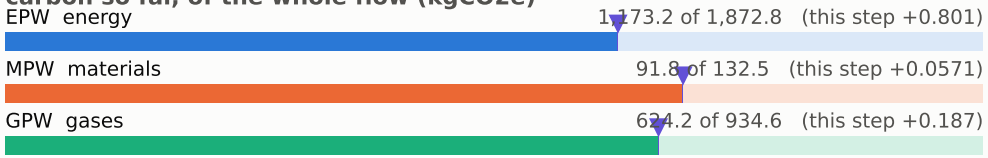

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

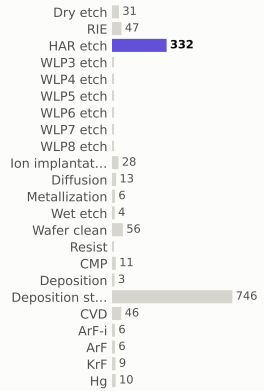

materials deposited (g)

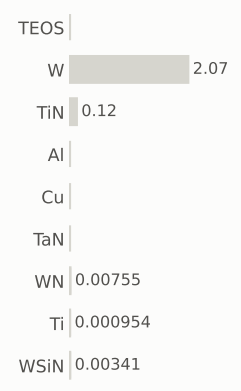

gases emitted (g)

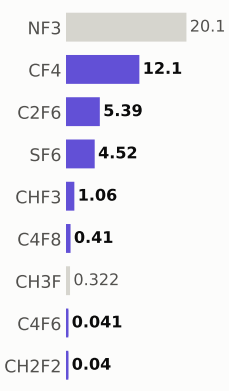

Step #17844.4295: HAR_etch

etch_noop · HAR_etch

1.04	1,890.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

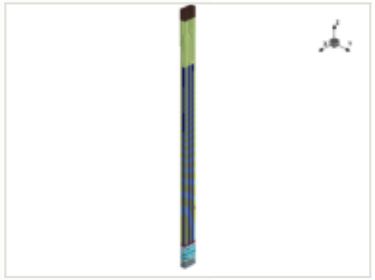

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

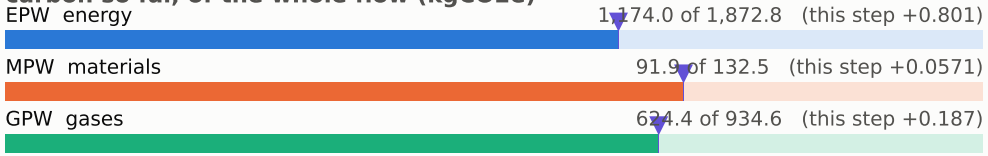

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

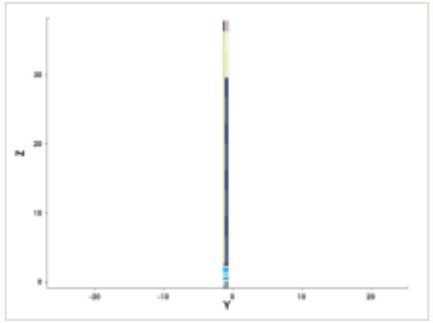

y cut at -1.035 µm

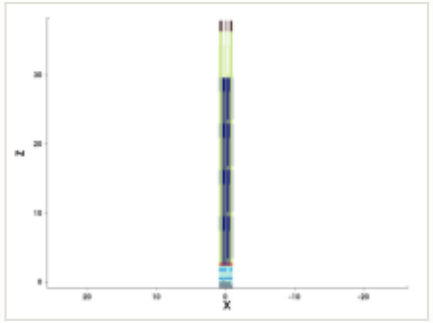

mask for this step

no mask for this step

steps by process area

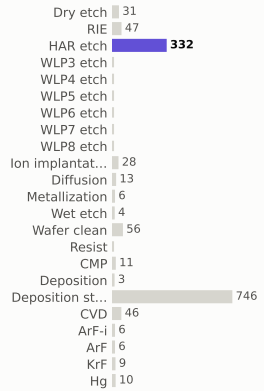

materials deposited (g)

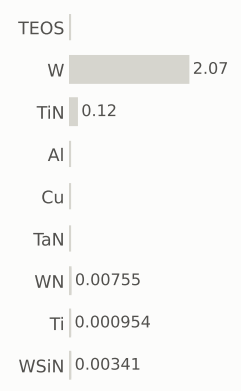

gases emitted (g)

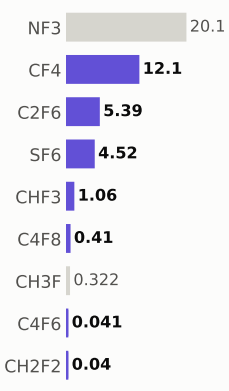

Step #17844.4966: HAR_etch

etch_noop · HAR_etch

1.04	1,891.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

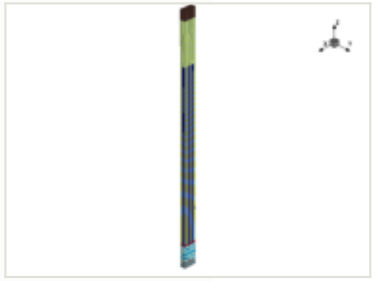

x cut at 0.000 µm

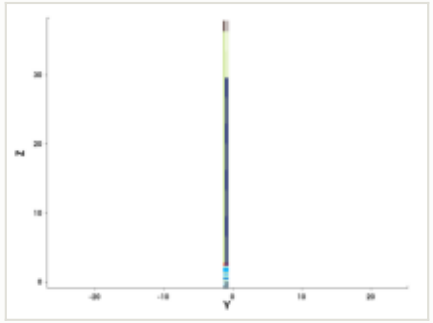

y cut at -1.035 µm

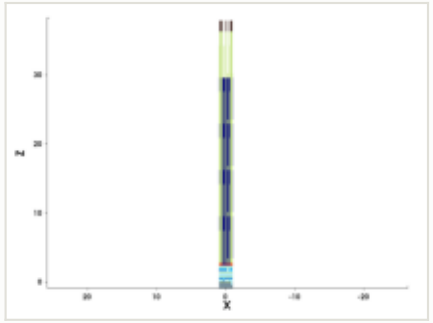

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

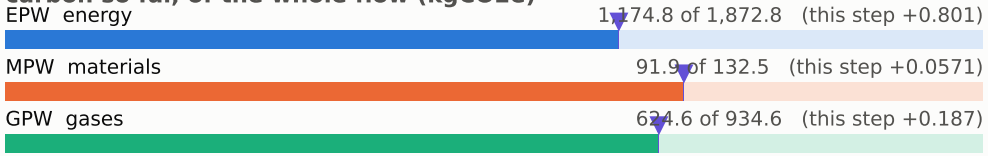

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

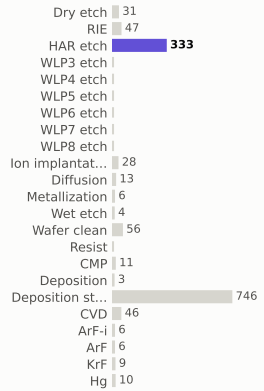

materials deposited (g)

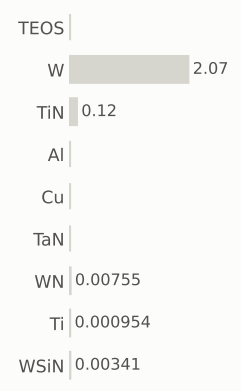

gases emitted (g)

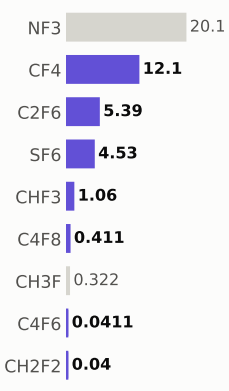

Step #17844.5638: HAR_etch

etch_noop · HAR_etch

1.04	1,892.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

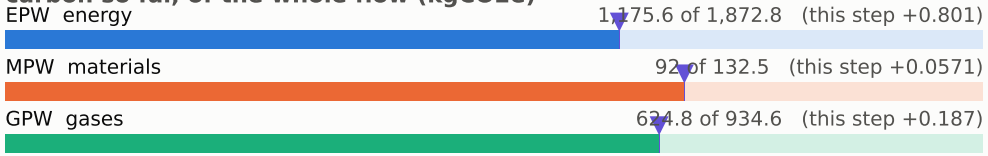

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

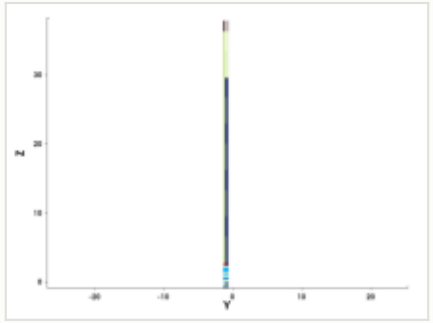

y cut at -1.035 µm

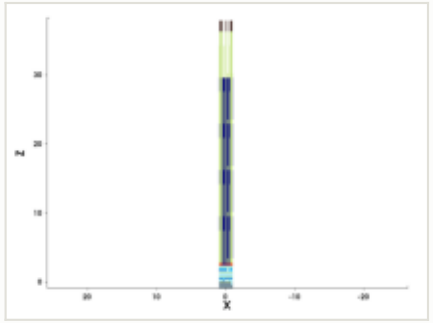

mask for this step

no mask for this step

steps by process area

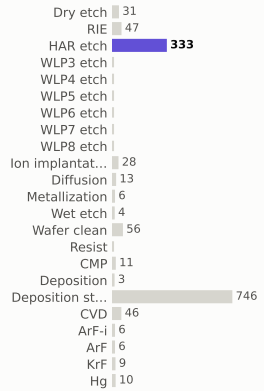

materials deposited (g)

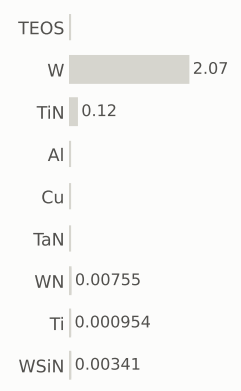

gases emitted (g)

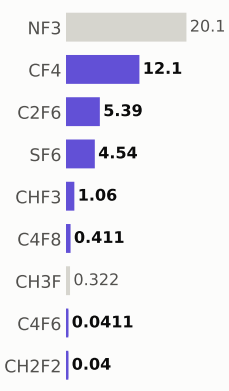

Step #17844.6309: HAR_etch

etch_noop · HAR_etch

1.04	1,893.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

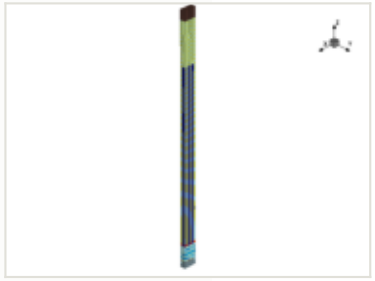

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

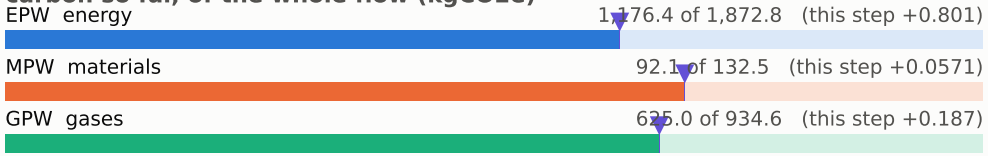

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

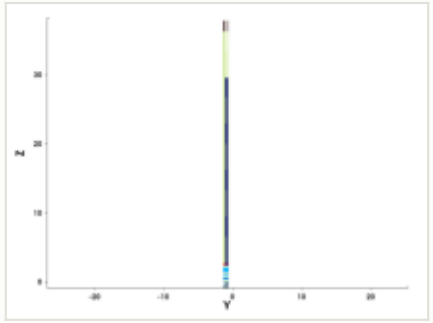

y cut at -1.035 µm

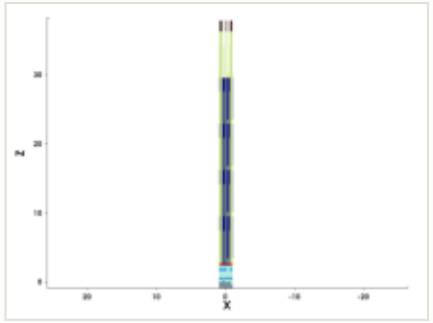

mask for this step

no mask for this step

steps by process area

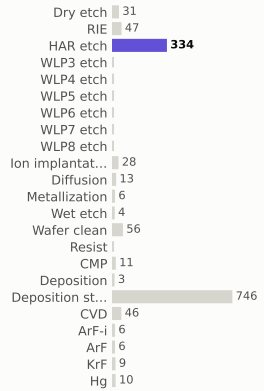

materials deposited (g)

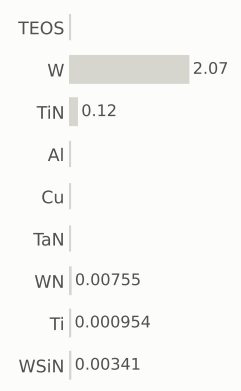

gases emitted (g)

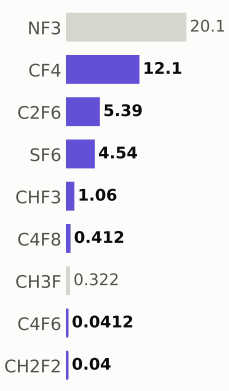

Step #17844.698: HAR_etch

etch_noop · HAR_etch

1.04	1,894.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

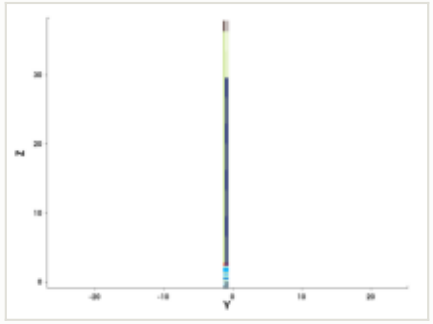

y cut at -1.035 µm

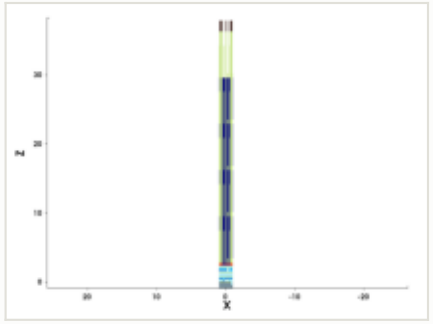

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

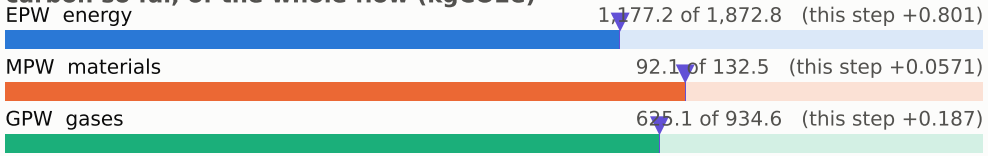

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

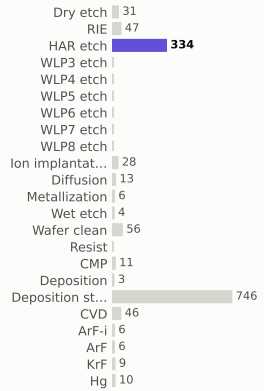

materials deposited (g)

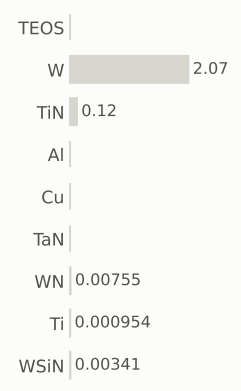

gases emitted (g)

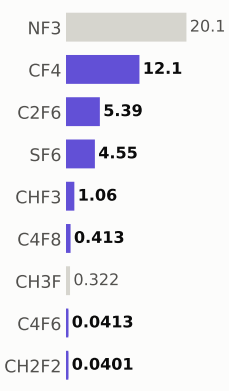

Step #17844.7651: HAR_etch

etch_noop · HAR_etch

1.04	1,895.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

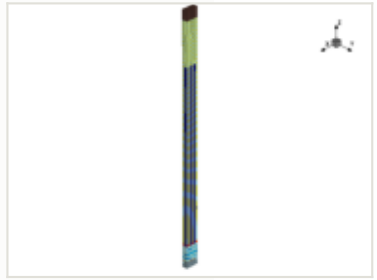



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

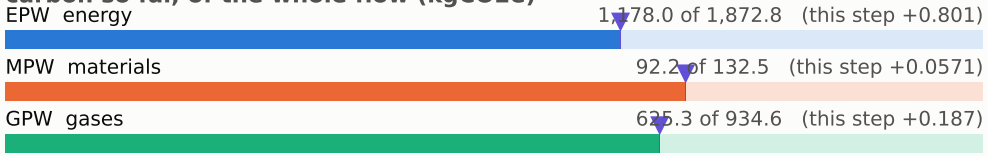

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

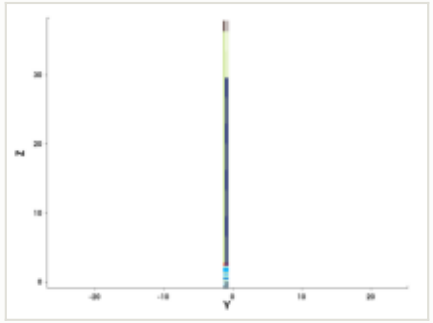

y cut at -1.035 µm

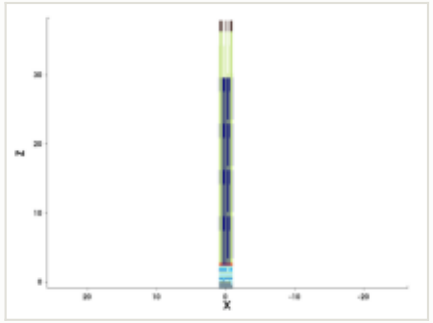

mask for this step

no mask for this step

steps by process area

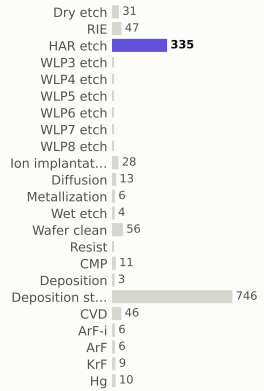

materials deposited (g)

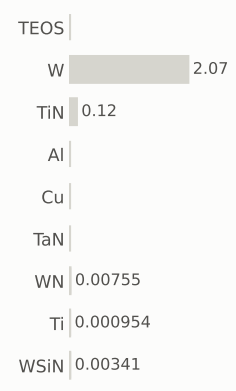

gases emitted (g)

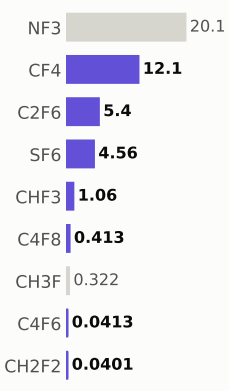

Step #17844.8322: HAR_etch

etch_noop · HAR_etch

1.04	1,896.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

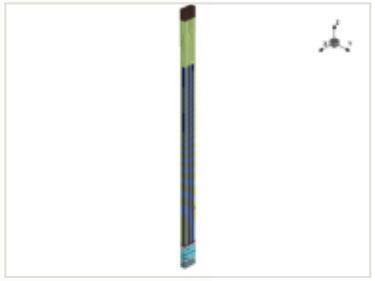

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

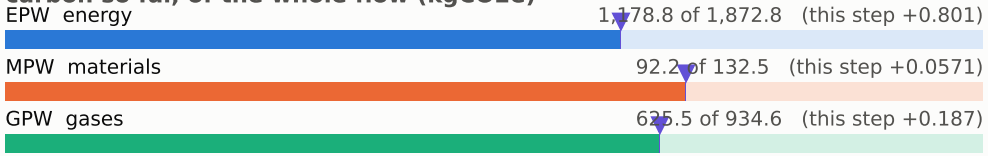

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

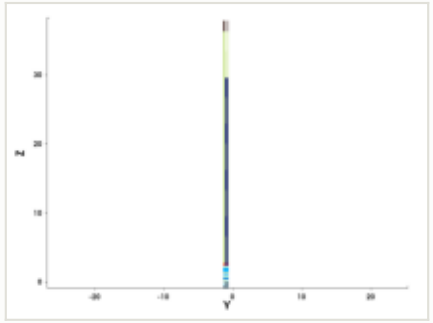

y cut at -1.035 µm

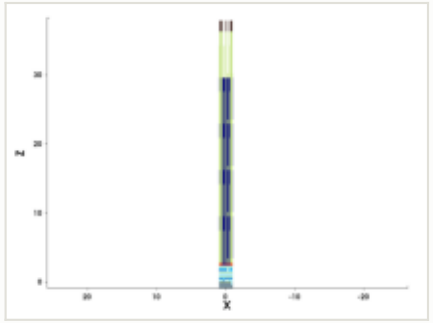

mask for this step

no mask for this step

steps by process area

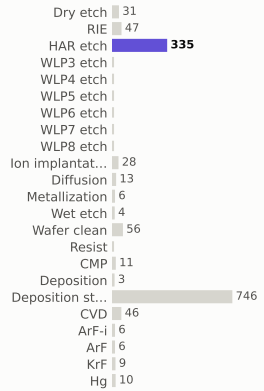

materials deposited (g)

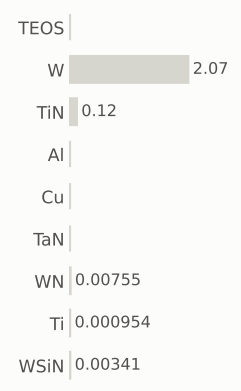

gases emitted (g)

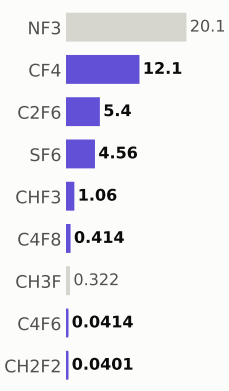

Step #17844.8993: HAR_etch

etch_noop · HAR_etch

1.04	1,897.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

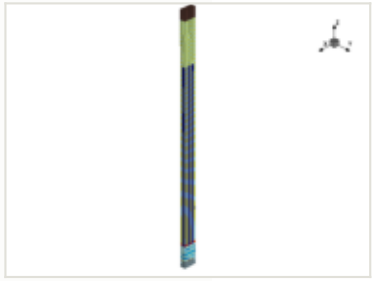

x cut at 0.000 µm

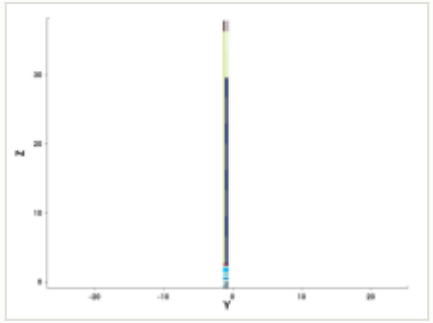

y cut at -1.035 µm

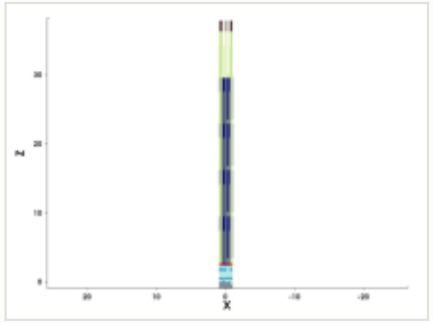

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

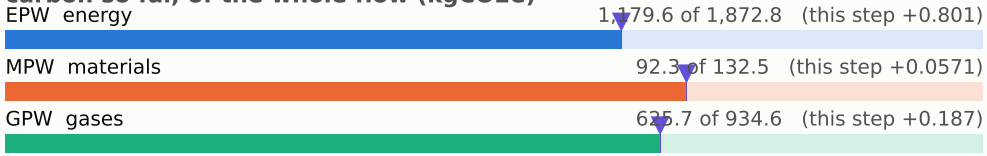

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

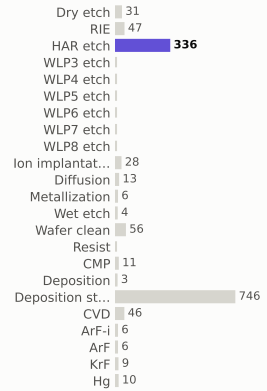

materials deposited (g)

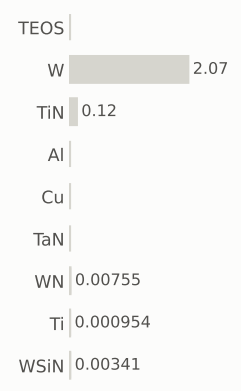

gases emitted (g)

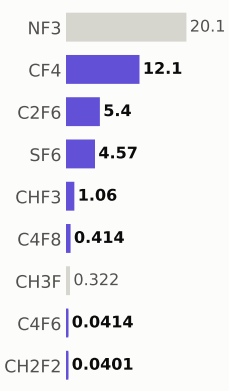

Step #17844.9664: HAR_etch

etch_noop · HAR_etch

1.04	1,898.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

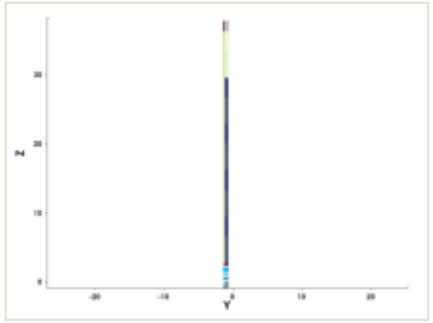

y cut at -1.035 µm

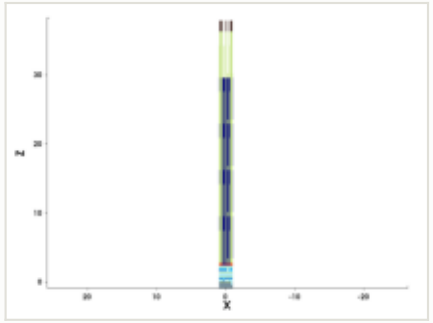

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

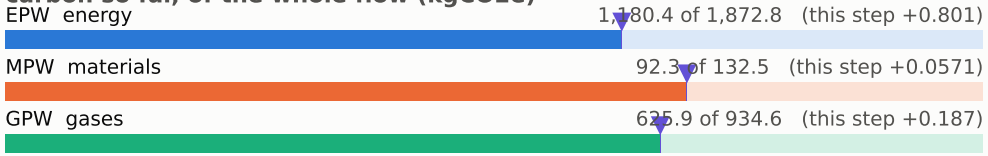

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

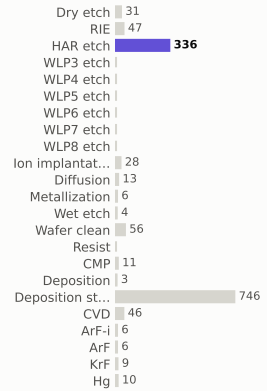

materials deposited (g)

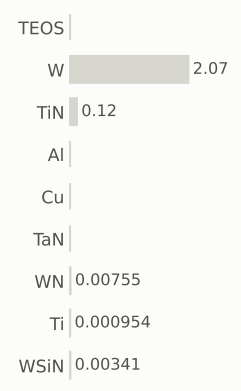

gases emitted (g)

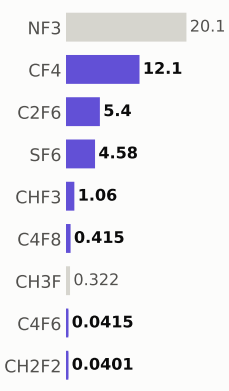

Step #17845.0336: HAR_etch

etch_noop · HAR_etch

1.04	1,899.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

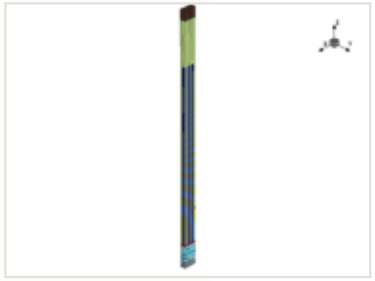

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

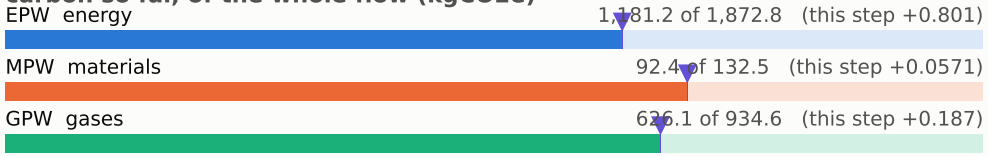

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

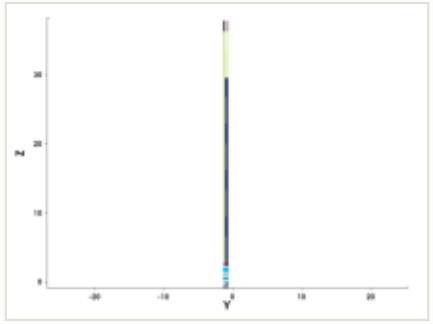

y cut at -1.035 µm

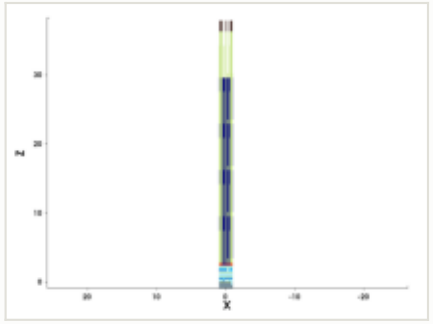

mask for this step

no mask for this step

steps by process area

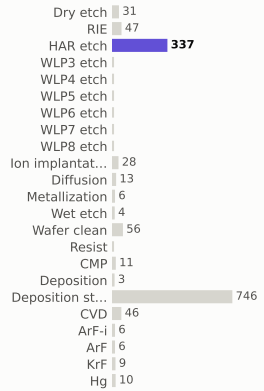

materials deposited (g)

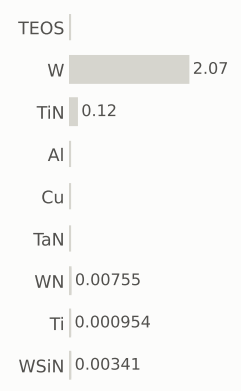

gases emitted (g)

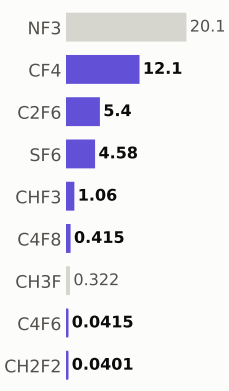

Step #17845.1007: HAR_etch

etch_noop · HAR_etch

1.04	1,900.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

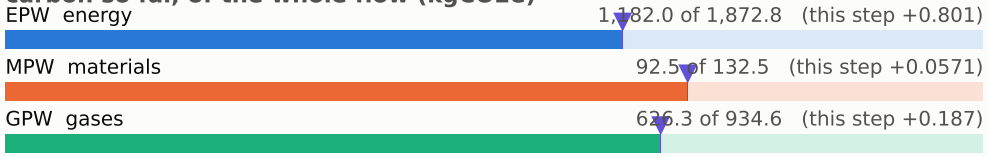

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

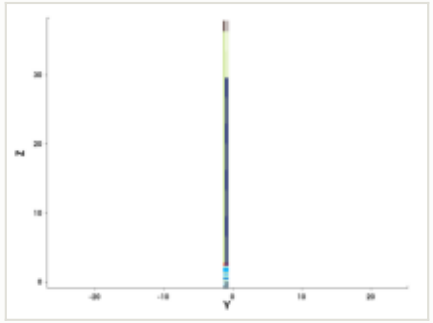

y cut at -1.035 µm

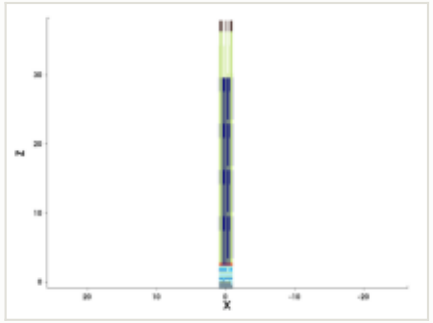

mask for this step

no mask for this step

steps by process area

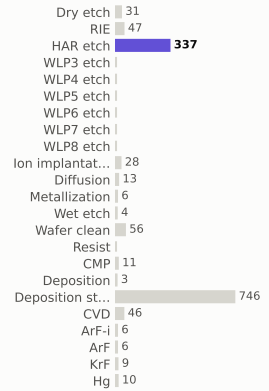

materials deposited (g)

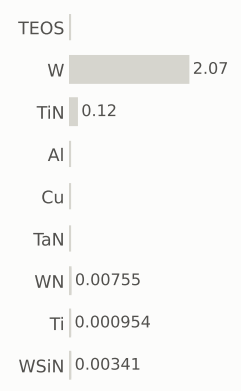

gases emitted (g)

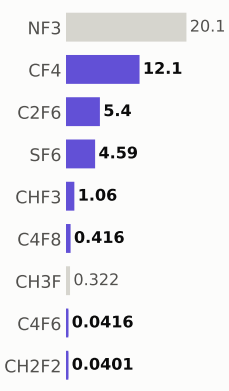

Step #17845.1678: HAR_etch

etch_noop · HAR_etch

1.04	1,901.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

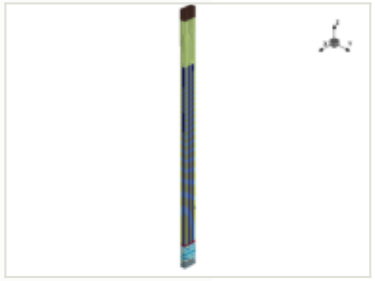

x cut at 0.000 µm

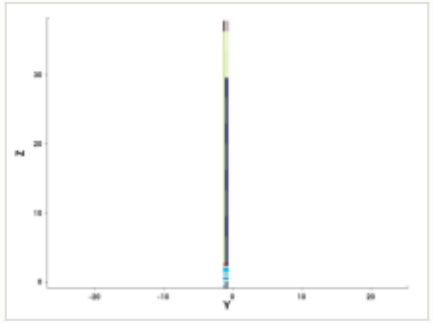

y cut at -1.035 µm

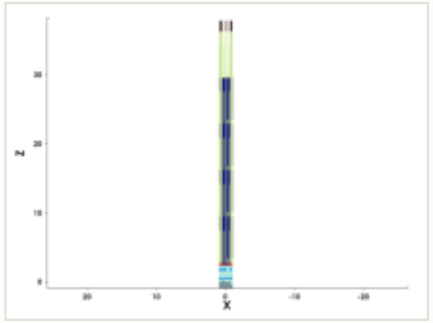

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

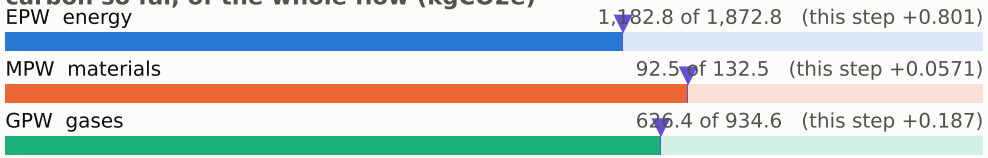

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

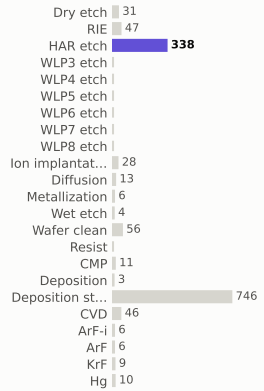

materials deposited (g)

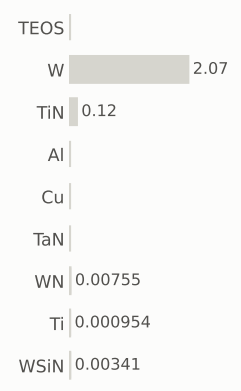

gases emitted (g)

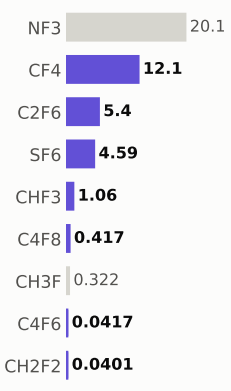

Step #17845.2349: HAR_etch

etch_noop · HAR_etch

1.04	1,902.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

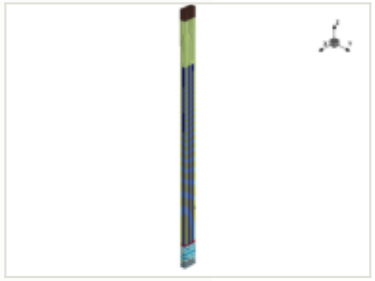

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

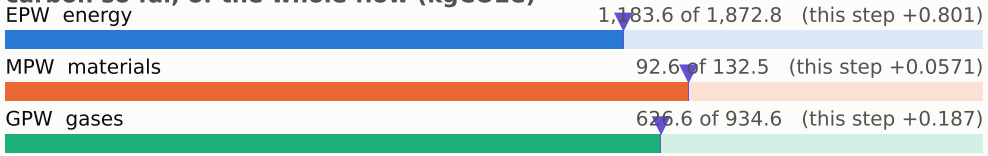

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

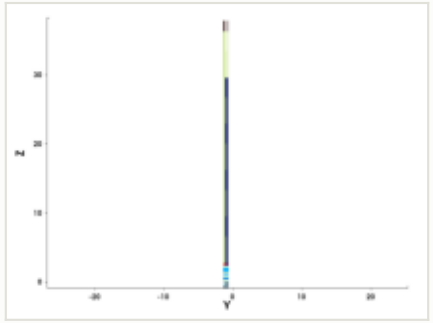

y cut at -1.035 µm

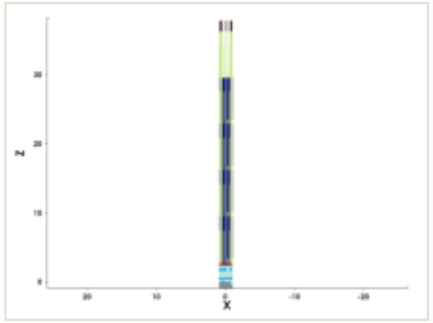

mask for this step

no mask for this step

steps by process area

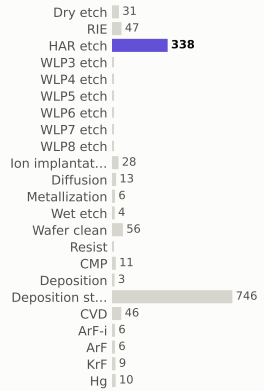

materials deposited (g)

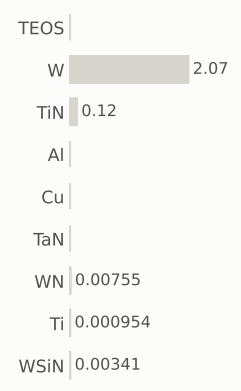

gases emitted (g)

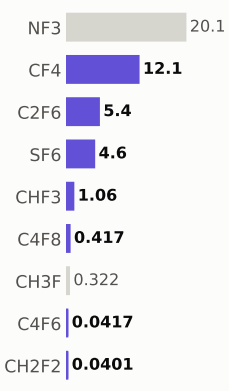

Step #17845.302: HAR_etch

etch_noop · HAR_etch

1.04	1,903.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

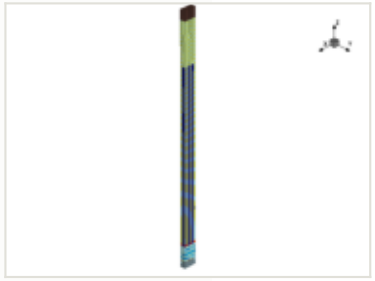

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

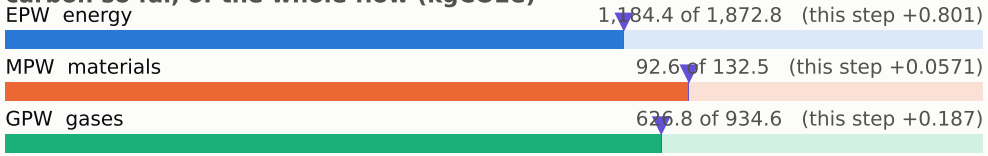

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

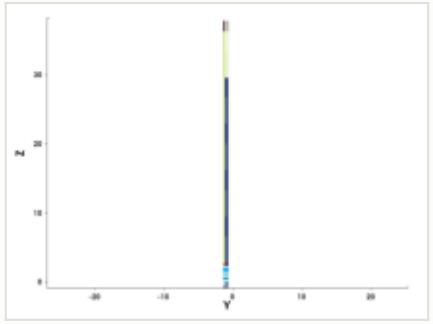

y cut at -1.035 µm

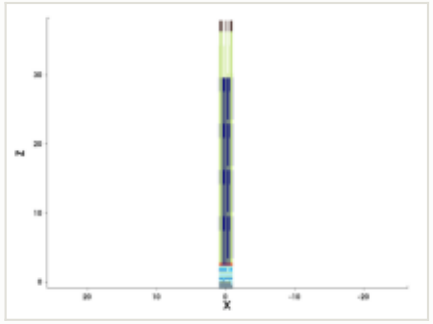

mask for this step

no mask for this step

steps by process area

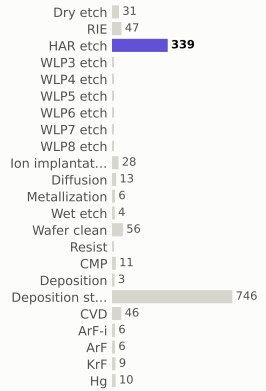

materials deposited (g)

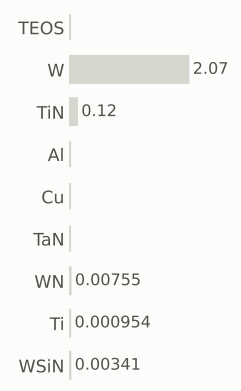

gases emitted (g)

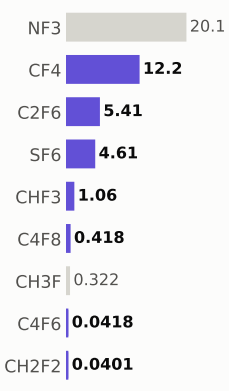

Step #17845.3691: HAR_etch

etch_noop · HAR_etch

1.04	1,904.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

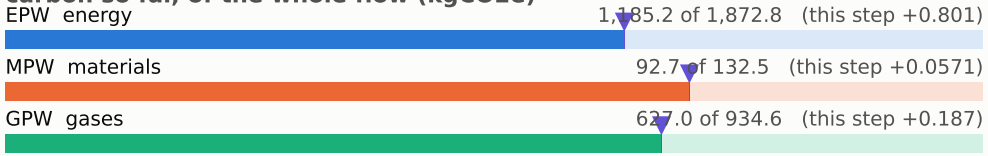

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

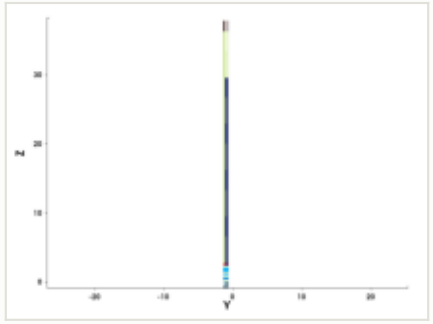

y cut at -1.035 µm

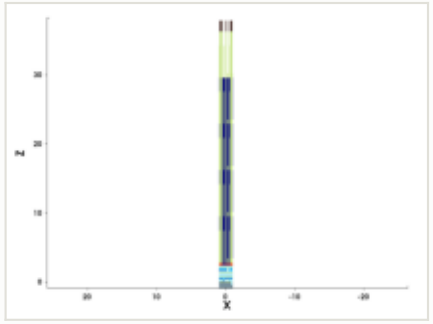

mask for this step

no mask for this step

steps by process area

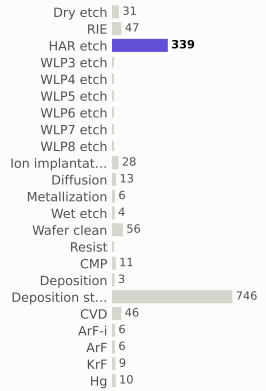

materials deposited (g)

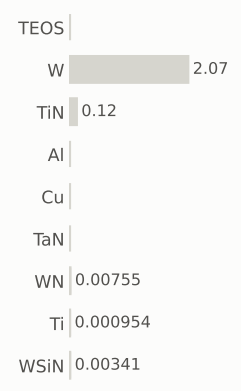

gases emitted (g)

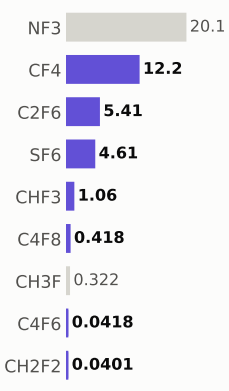

Step #17845.4362: HAR_etch

etch_noop · HAR_etch

1.04	1,906.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

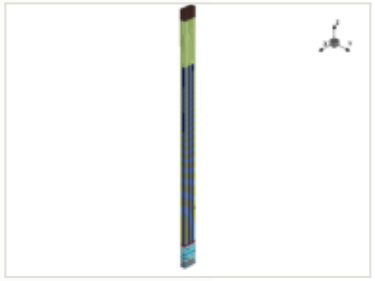

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

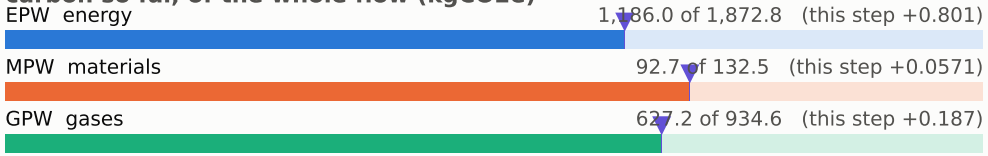

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

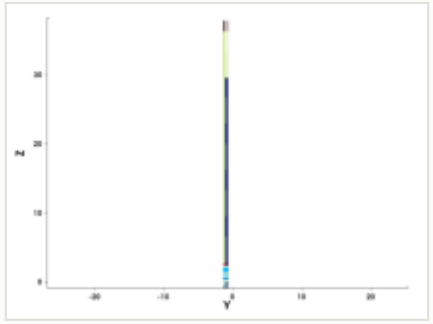

y cut at -1.035 µm

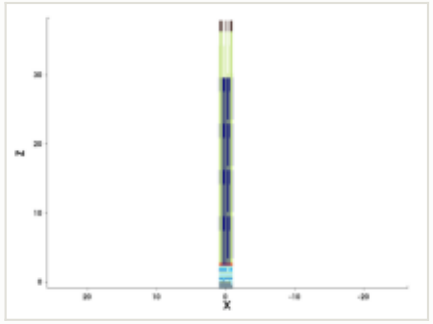

mask for this step

no mask for this step

steps by process area

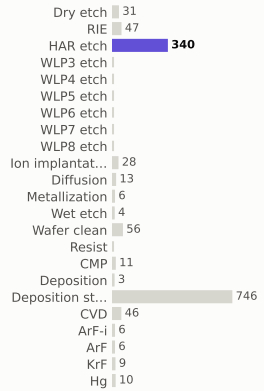

materials deposited (g)

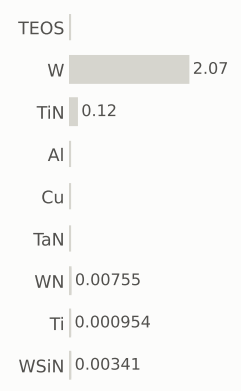

gases emitted (g)

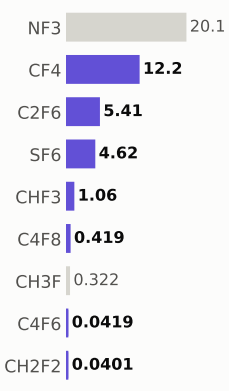

Step #17845.5034: HAR_etch

etch_noop · HAR_etch

1.04	1,907.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

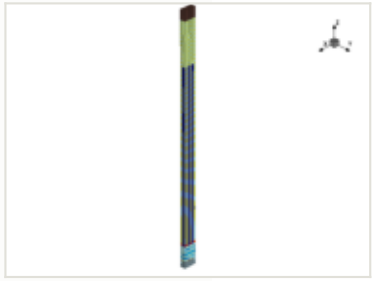

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

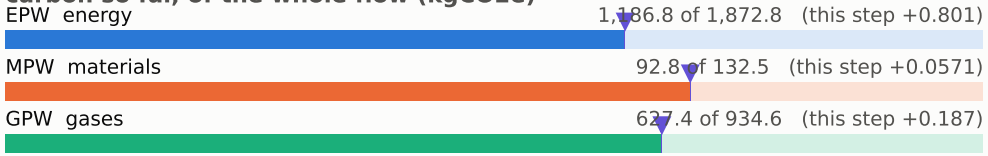

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

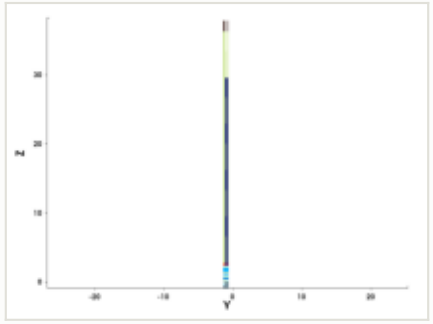

y cut at -1.035 µm

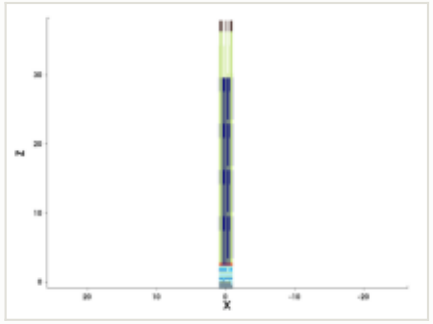

mask for this step

no mask for this step

steps by process area

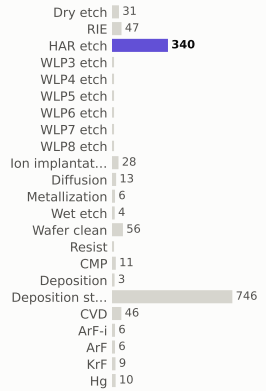

materials deposited (g)

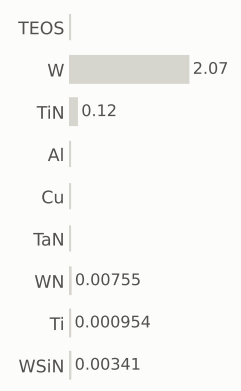

gases emitted (g)

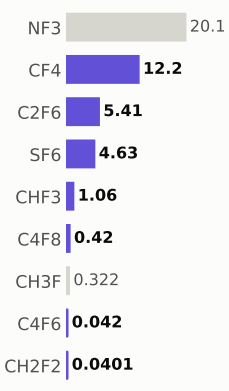

Step #17845.5705: HAR_etch

etch_noop · HAR_etch

1.04	1,908.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

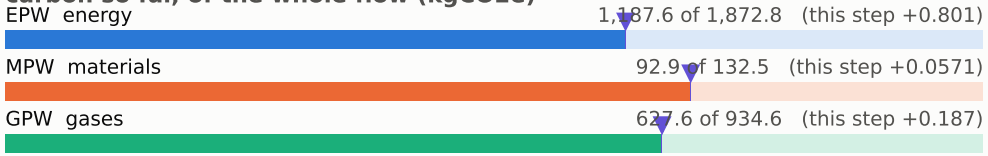

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

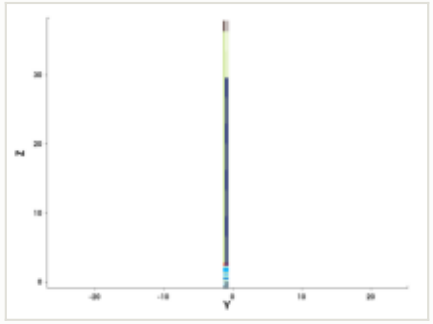

y cut at -1.035 µm

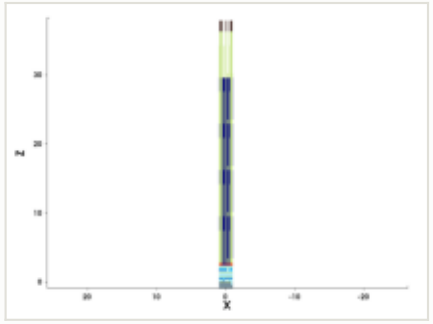

mask for this step

no mask for this step

steps by process area

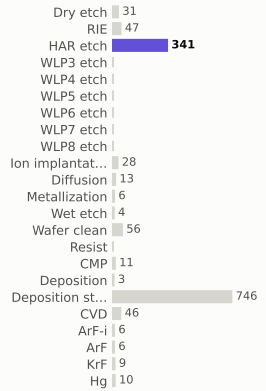

materials deposited (g)

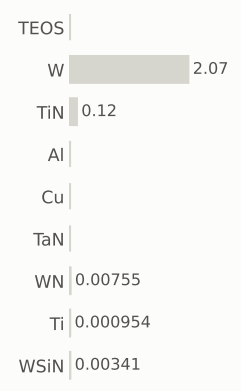

gases emitted (g)

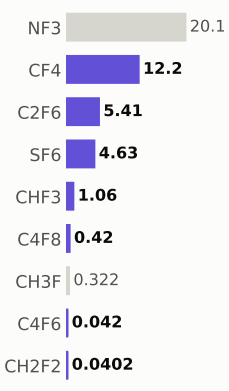

Step #17845.6376: HAR_etch

etch_noop · HAR_etch

1.04	1,909.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

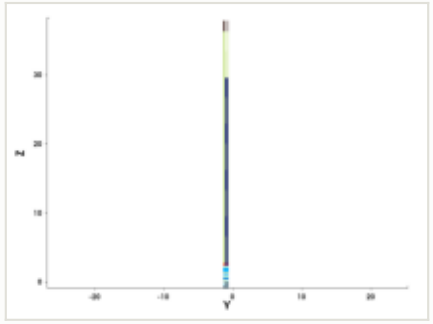

y cut at -1.035 µm

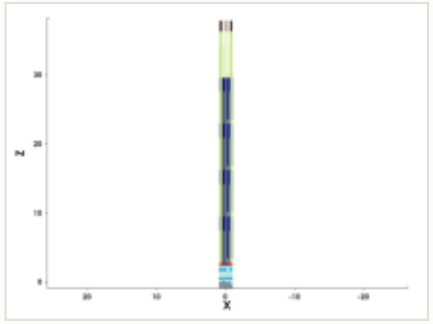

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

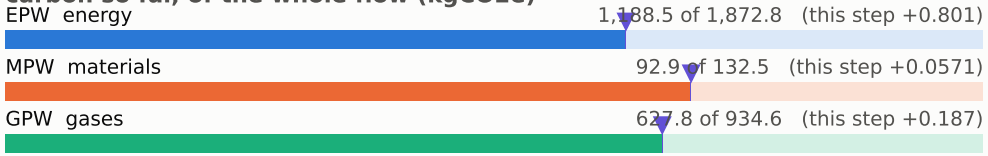

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

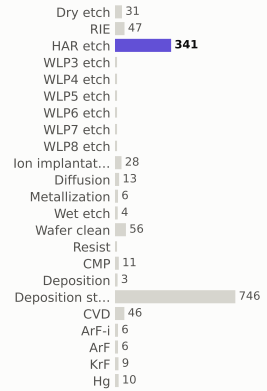

materials deposited (g)

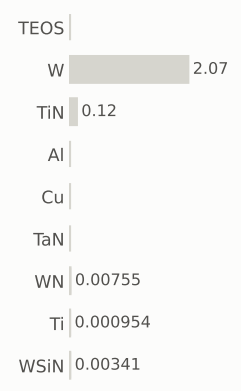

gases emitted (g)

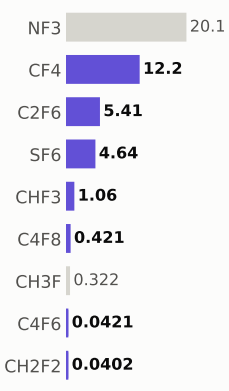

Step #17845.7047: HAR_etch

etch_noop · HAR_etch

1.04	1,910.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

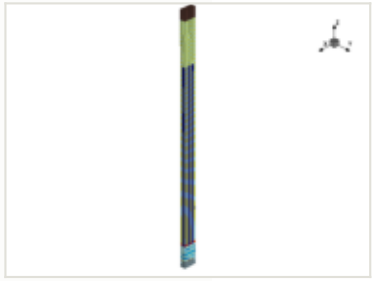

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

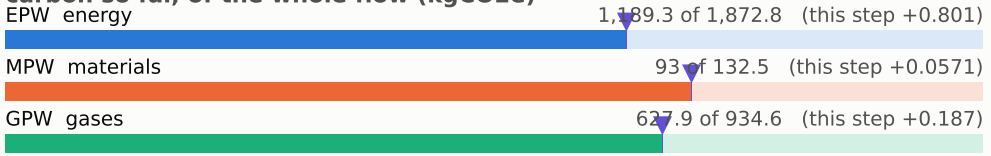

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

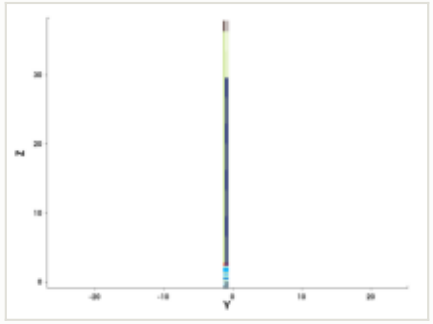

y cut at -1.035 µm

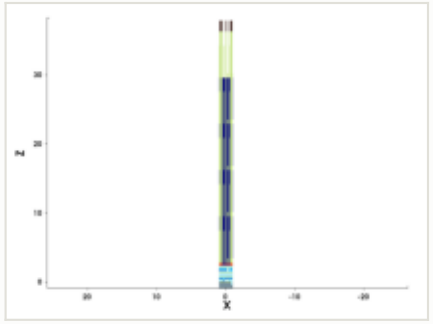

mask for this step

no mask for this step

steps by process area

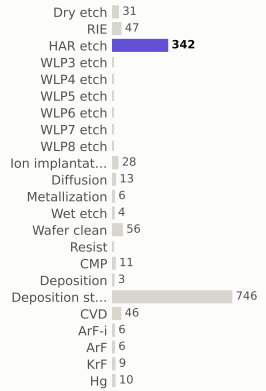

materials deposited (g)

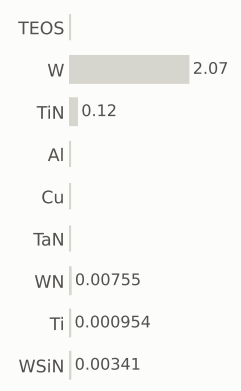

gases emitted (g)

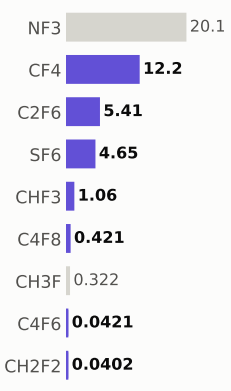

Step #17845.7718: HAR_etch

etch_noop · HAR_etch

1.04	1,911.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

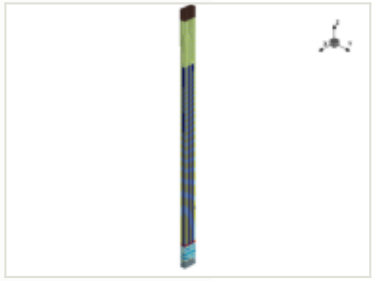

x cut at 0.000 µm

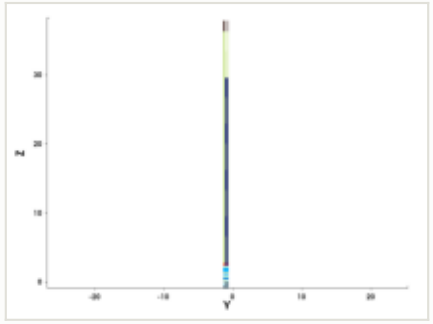

y cut at -1.035 µm

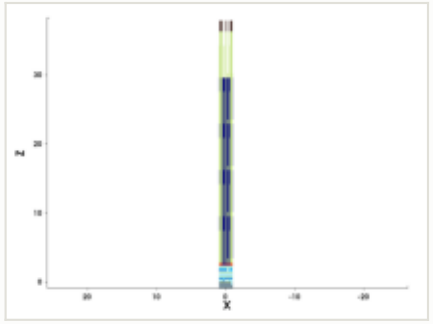

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

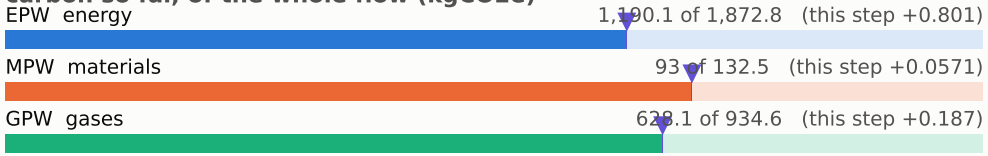

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

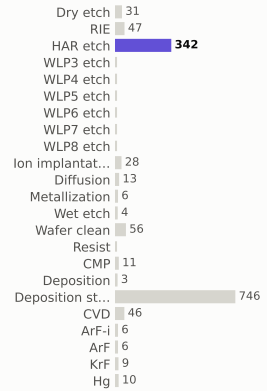

materials deposited (g)

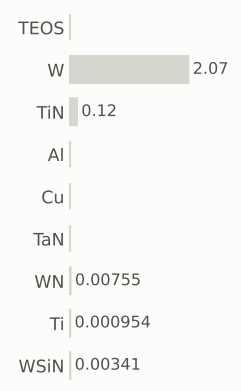

gases emitted (g)

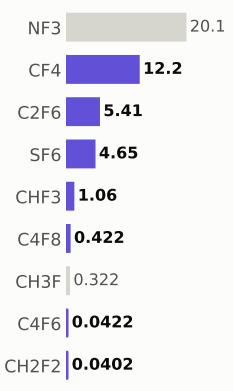

Step #17845.8389: HAR_etch

etch_noop · HAR_etch

1.04	1,912.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

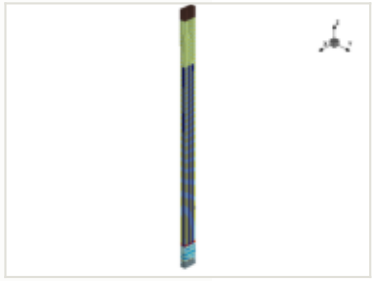

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

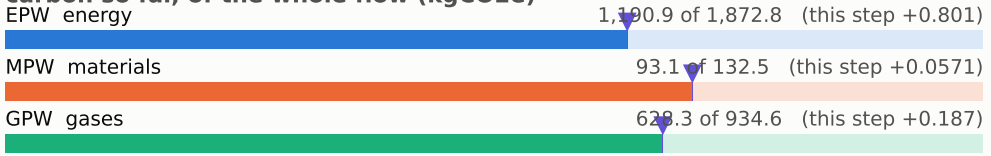

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

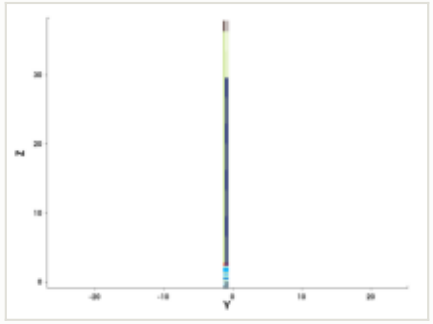

y cut at -1.035 µm

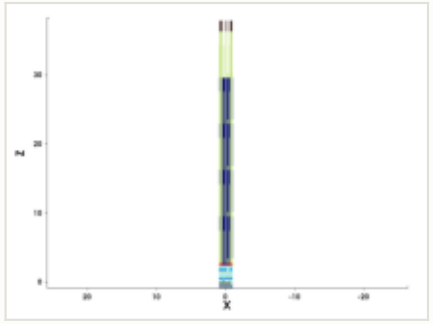

mask for this step

no mask for this step

steps by process area

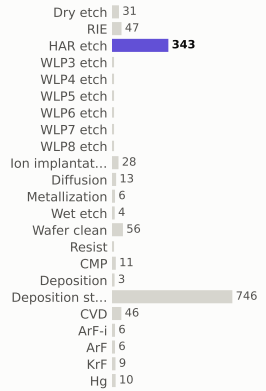

materials deposited (g)

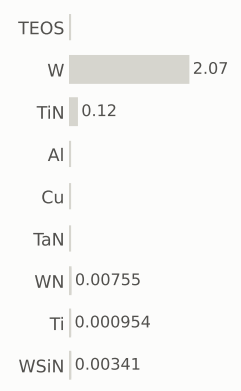

gases emitted (g)

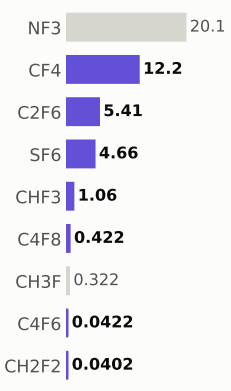

Step #17845.906: HAR_etch

etch_noop · HAR_etch

1.04	1,913.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

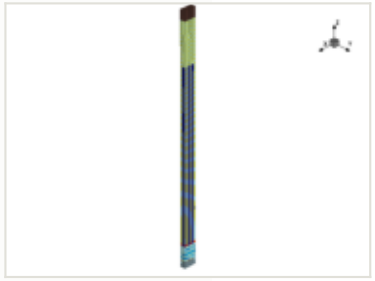



this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

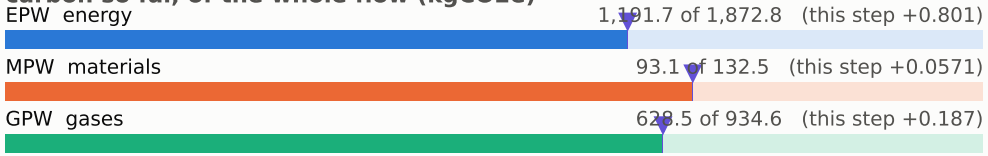

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

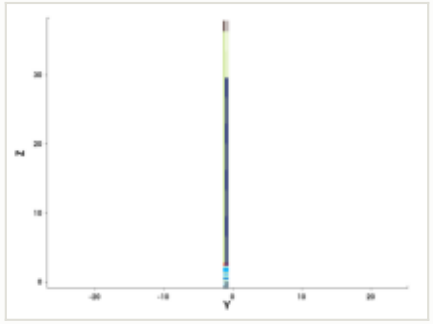

y cut at -1.035 µm

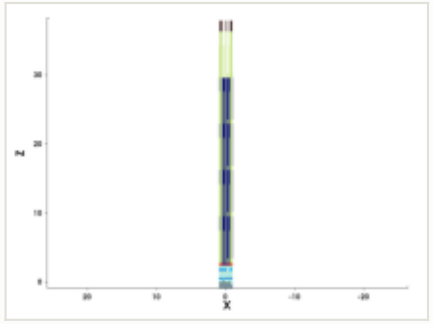

mask for this step

no mask for this step

steps by process area

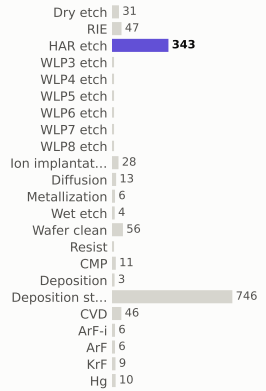

materials deposited (g)

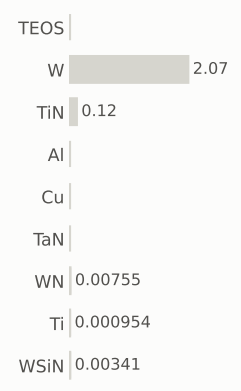

gases emitted (g)

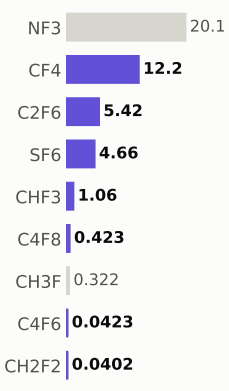

Step #17845.9732: HAR_etch

etch_noop · HAR_etch

1.04	1,914.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

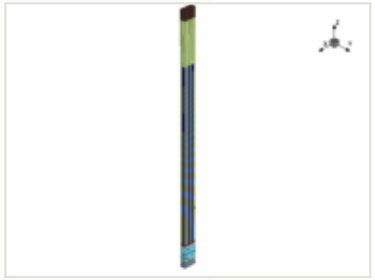

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

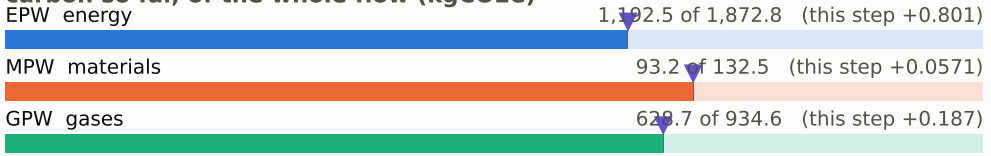

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

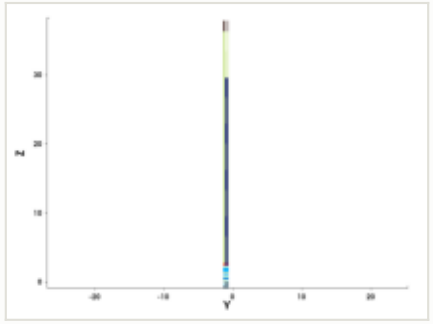

y cut at -1.035 µm

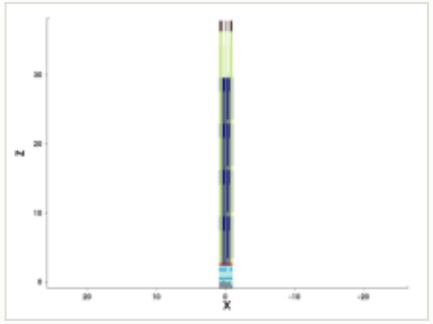

mask for this step

no mask for this step

steps by process area

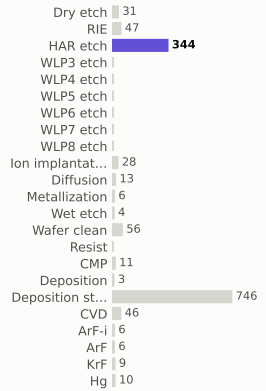

materials deposited (g)

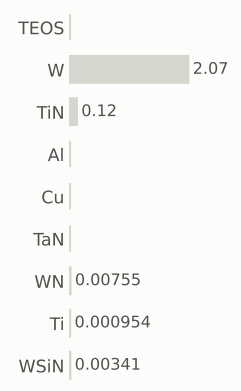

gases emitted (g)

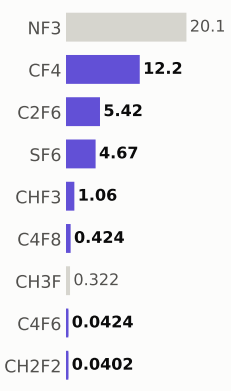

Step #17846.0403: HAR_etch

etch_noop · HAR_etch

1.04	1,915.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

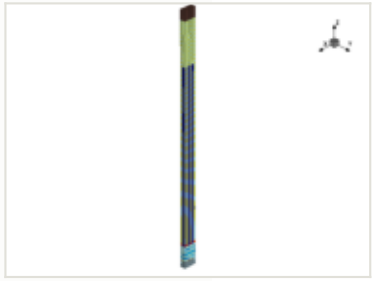

x cut at 0.000 µm

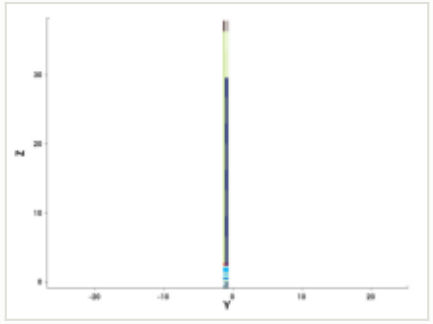

y cut at -1.035 µm

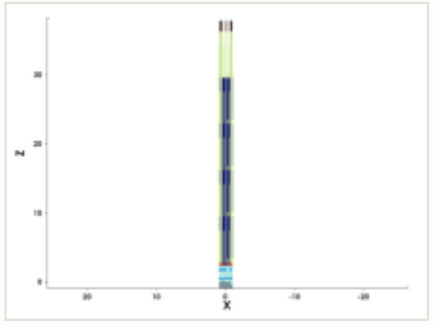

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

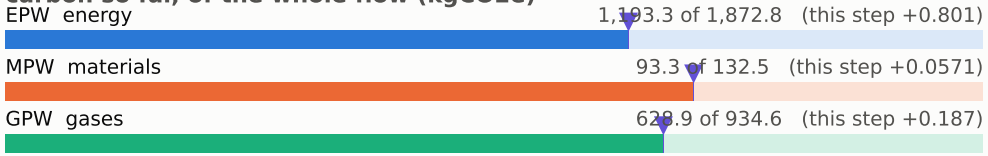

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

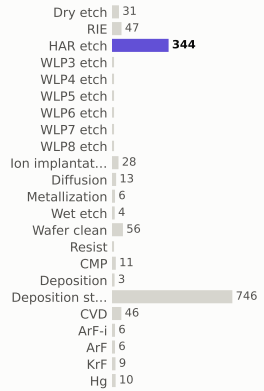

materials deposited (g)

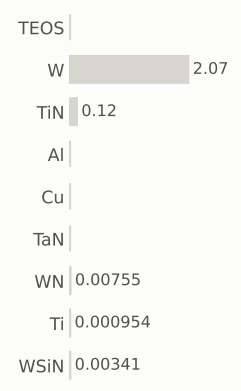

gases emitted (g)

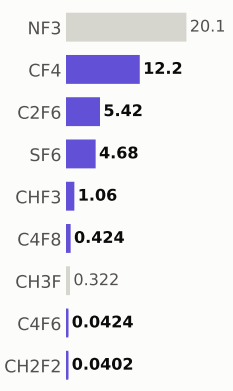

Step #17846.1074: HAR_etch

etch_noop · HAR_etch

1.04	1,916.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

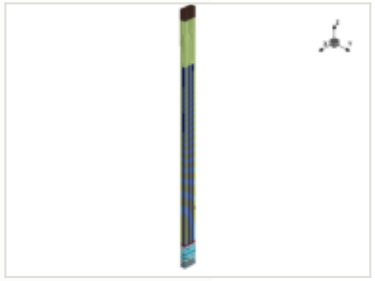

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

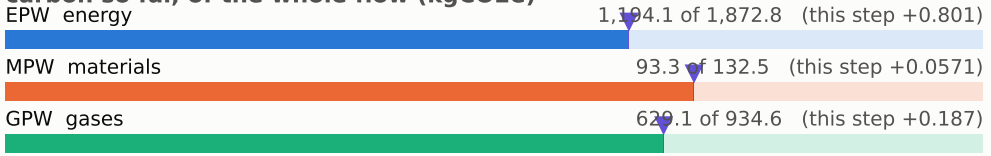

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

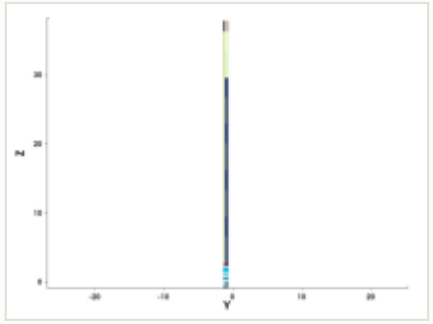

y cut at -1.035 µm

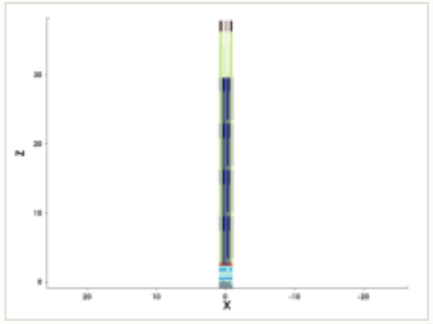

mask for this step

no mask for this step

steps by process area

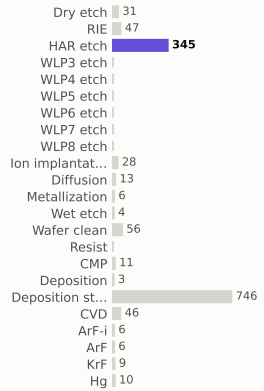

materials deposited (g)

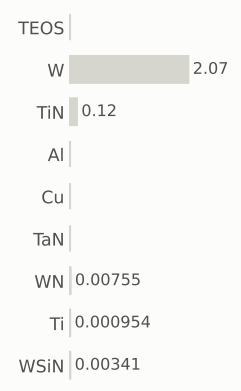

gases emitted (g)

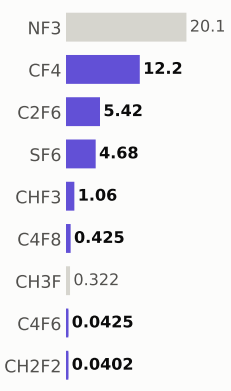

Step #17846.1745: HAR_etch

etch_noop · HAR_etch

1.04	1,917.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

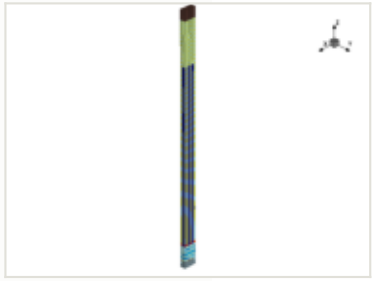

x cut at 0.000 µm

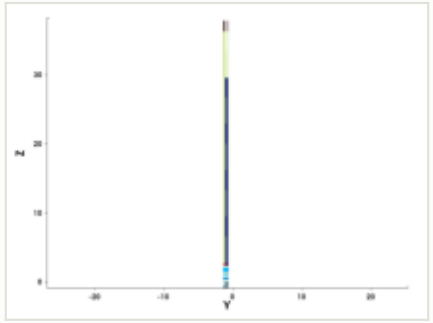

y cut at -1.035 µm

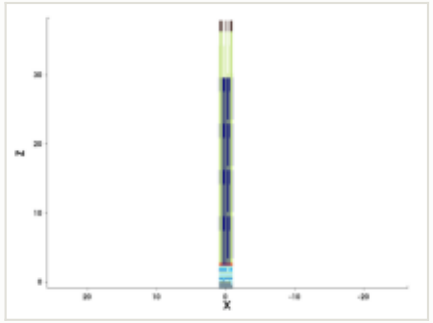

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

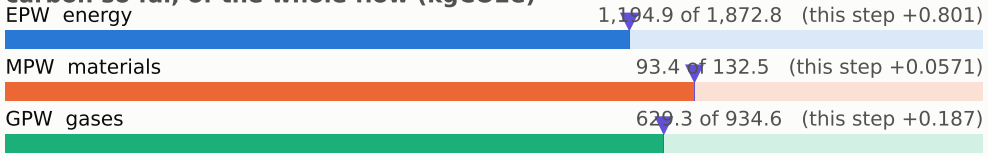

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

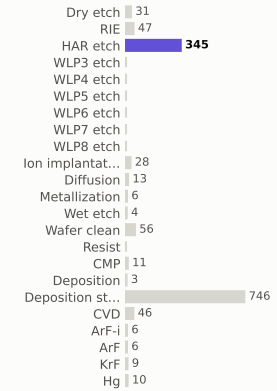

materials deposited (g)

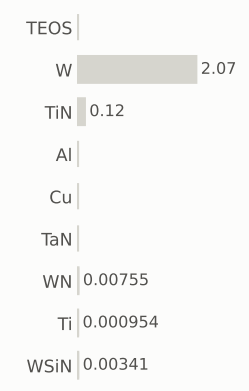

gases emitted (g)

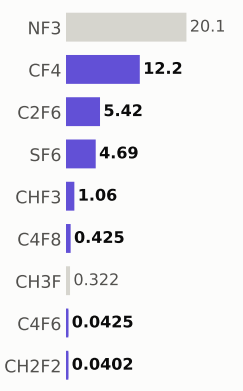

Step #17846.2416: HAR_etch

etch_noop · HAR_etch

1.04	1,918.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

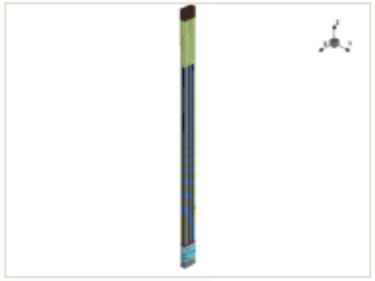

x cut at 0.000 µm

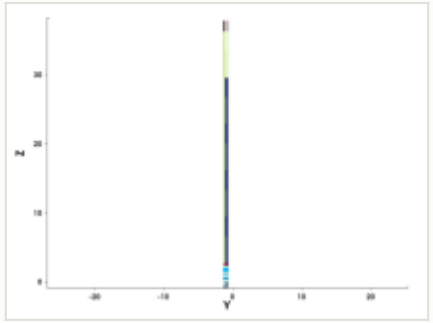

y cut at -1.035 µm

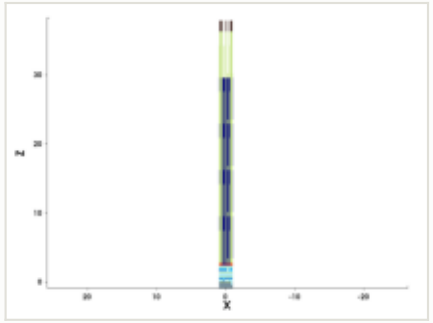

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

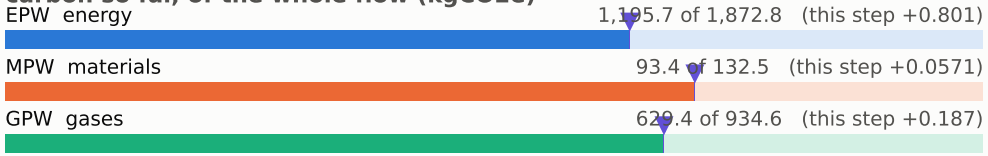

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

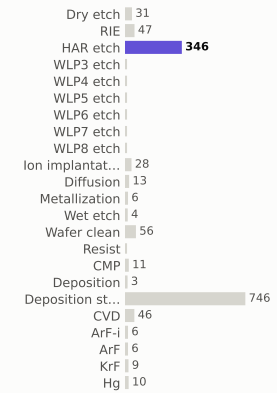

materials deposited (g)

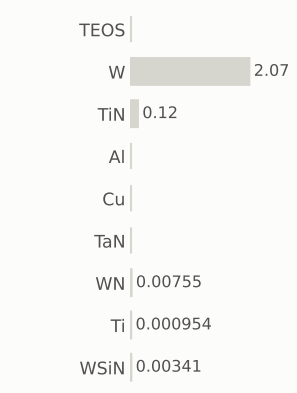

gases emitted (g)

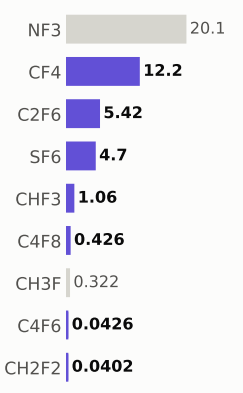

Step #17846.3087: HAR_etch

etch_noop · HAR_etch

1.04	1,919.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

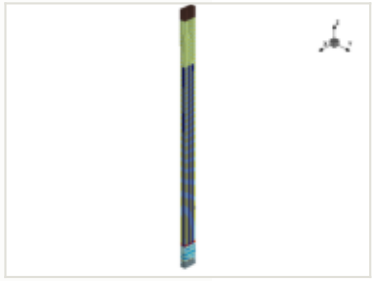

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

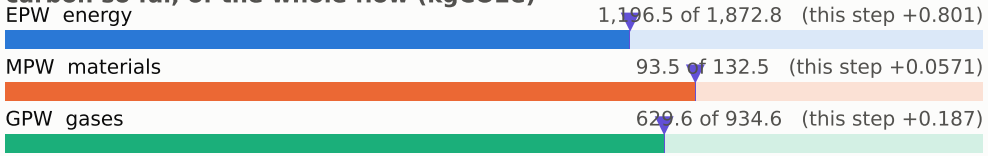

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

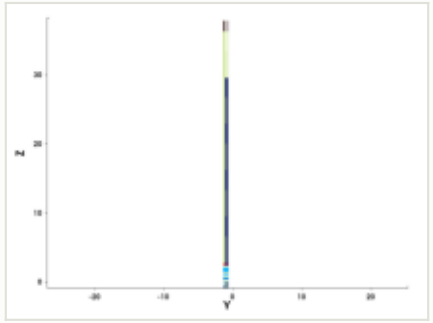

y cut at -1.035 µm

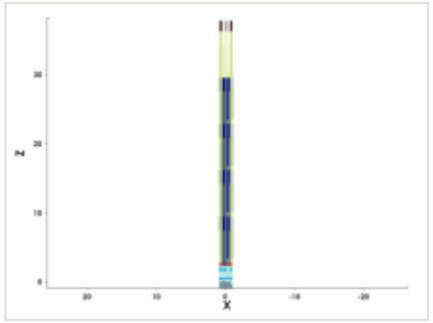

mask for this step

no mask for this step

steps by process area

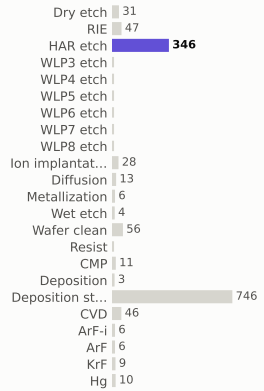

materials deposited (g)

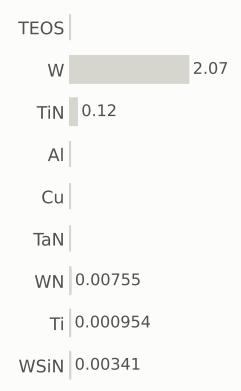

gases emitted (g)

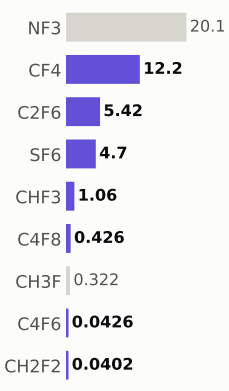

Step #17846.3758: HAR_etch

etch_noop · HAR_etch

1.04	1,920.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

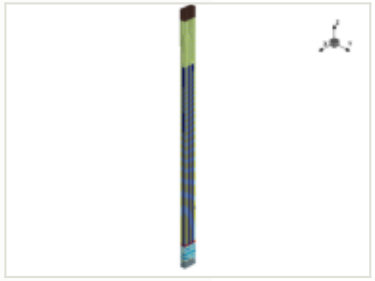

x cut at 0.000 µm

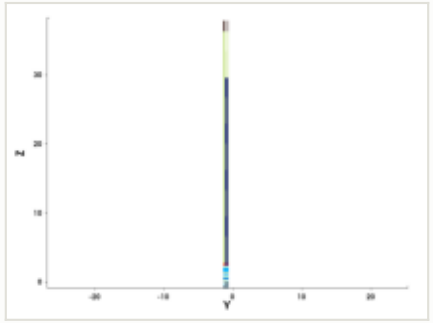

y cut at -1.035 µm

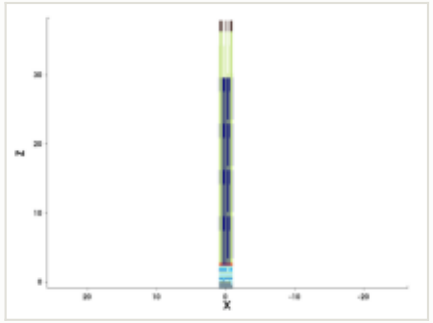

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

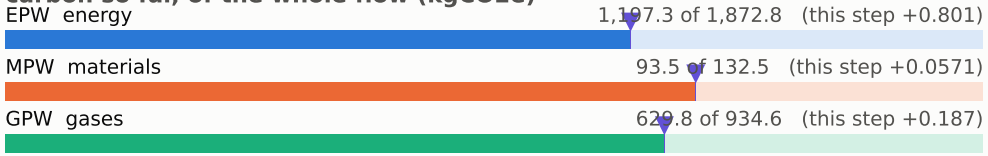

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

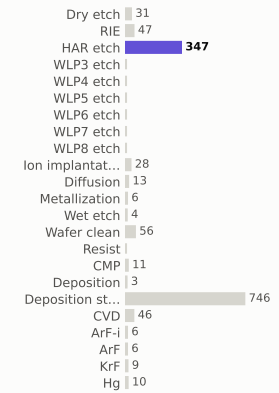

materials deposited (g)

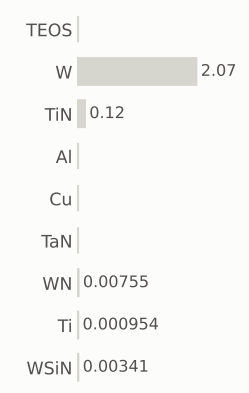

gases emitted (g)

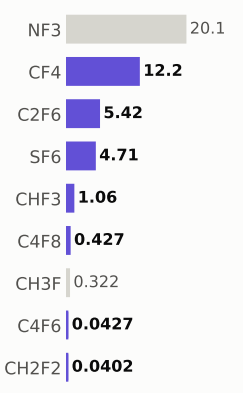

Step #17846.443: HAR_etch

etch_noop · HAR_etch

1.04	1,921.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

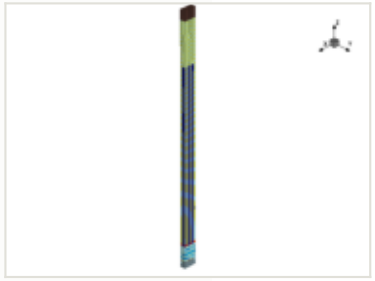

x cut at 0.000 µm

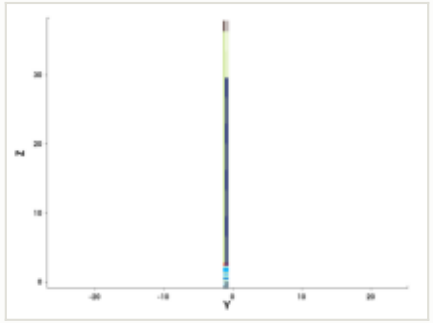

y cut at -1.035 µm

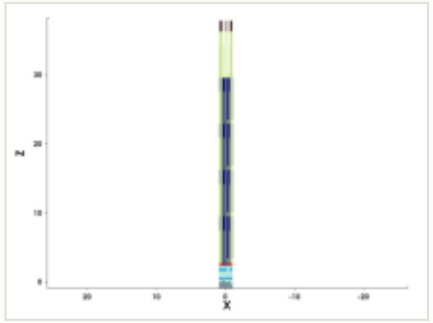

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

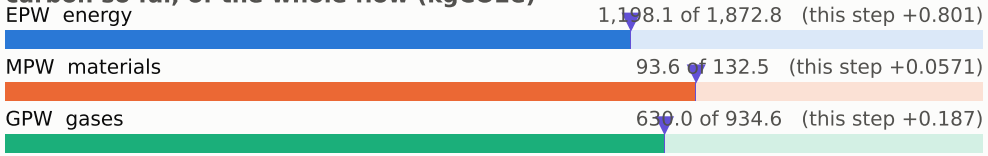

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

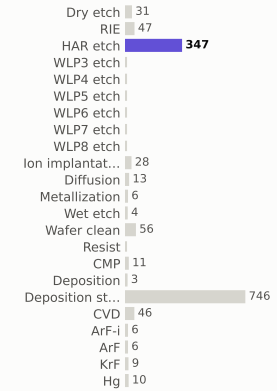

materials deposited (g)

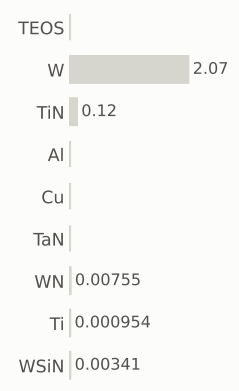

gases emitted (g)

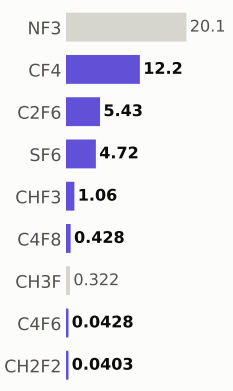

Step #17846.5101: HAR_etch

etch_noop · HAR_etch

1.04	1,922.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

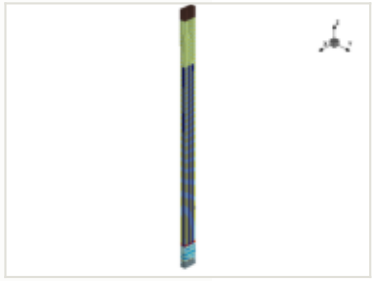

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

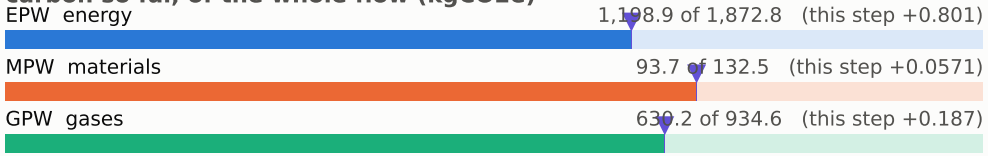

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

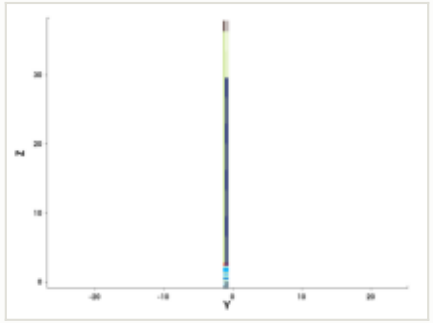

y cut at -1.035 µm

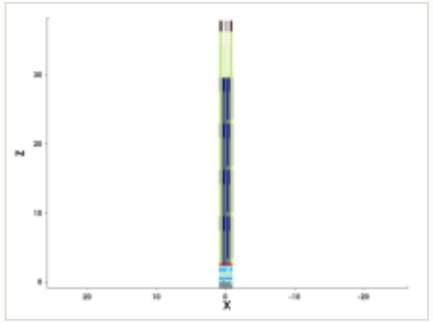

mask for this step

no mask for this step

steps by process area

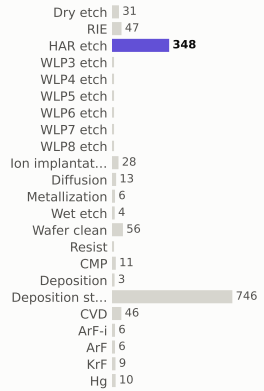

materials deposited (g)

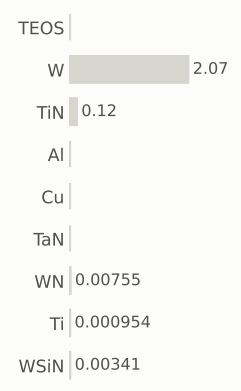

gases emitted (g)

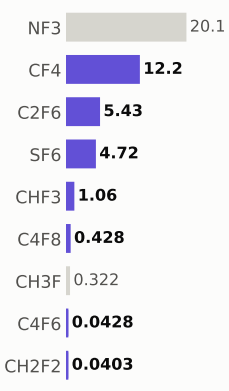

Step #17846.5772: HAR_etch

etch_noop · HAR_etch

1.04	1,923.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

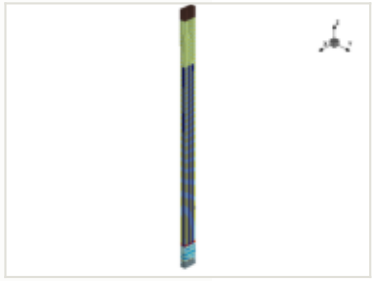

x cut at 0.000 µm

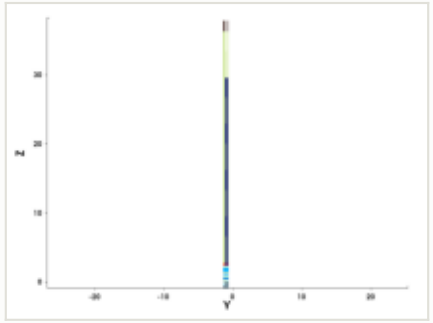

y cut at -1.035 µm

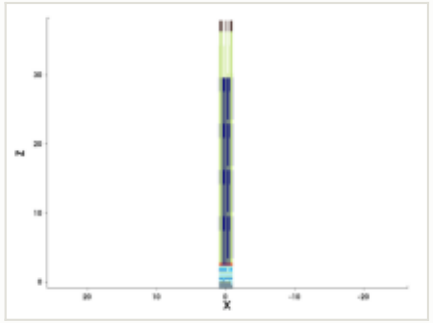

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

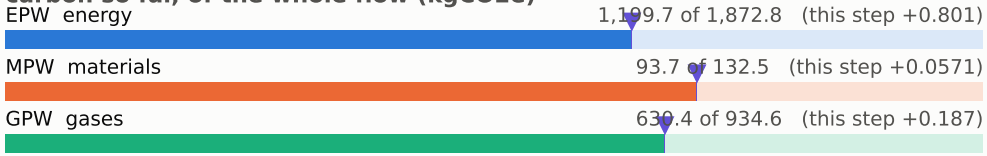

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

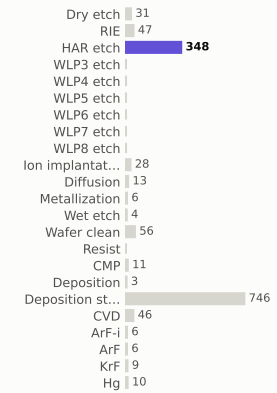

materials deposited (g)

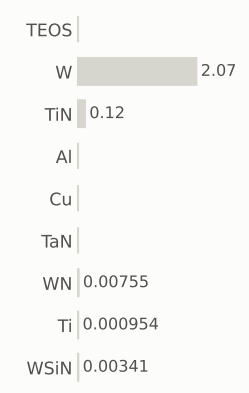

gases emitted (g)

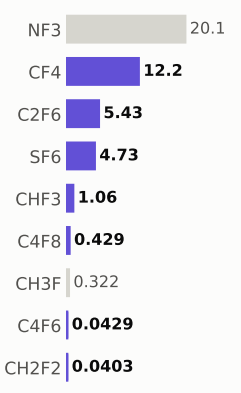

Step #17846.6443: HAR_etch

etch_noop · HAR_etch

1.04	1,924.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

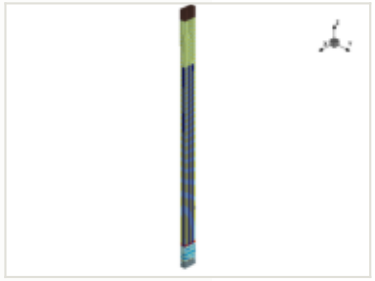



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

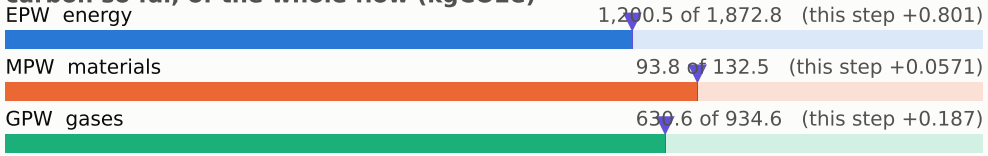

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

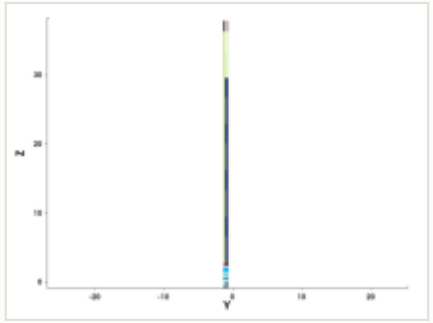

y cut at -1.035 µm

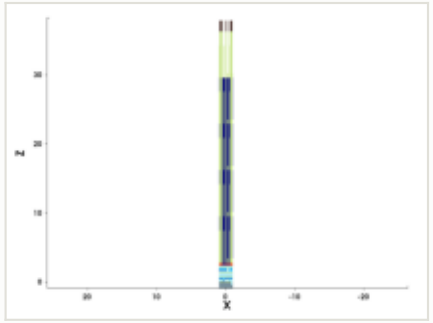

mask for this step

no mask for this step

steps by process area

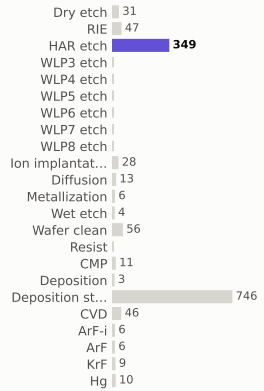

materials deposited (g)

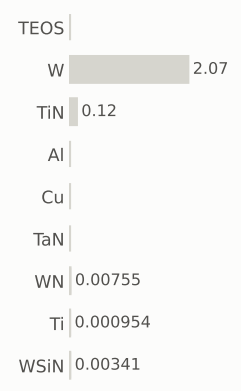

gases emitted (g)

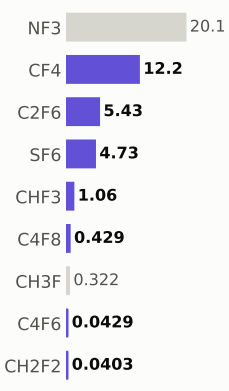

Step #17846.7114: HAR_etch

etch_noop · HAR_etch

1.04	1,925.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

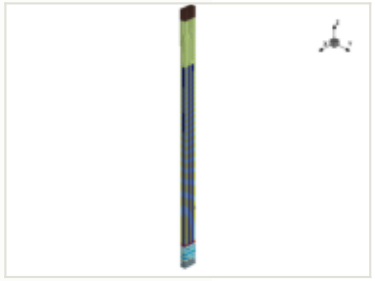



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

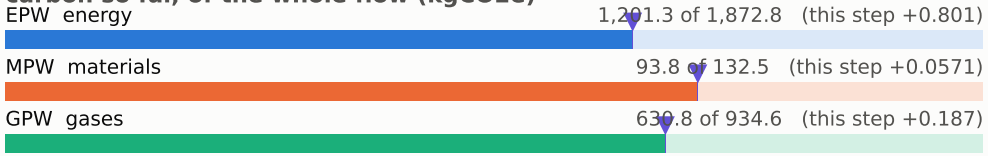

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

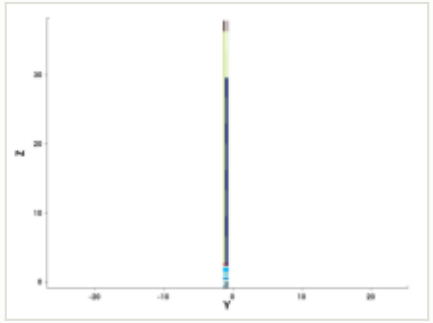

y cut at -1.035 µm

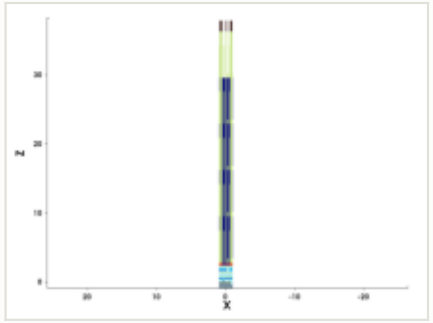

mask for this step

no mask for this step

steps by process area

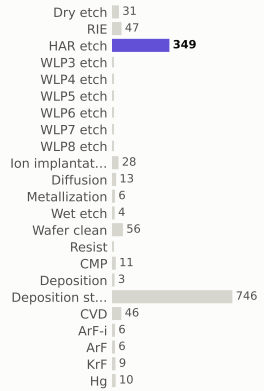

materials deposited (g)

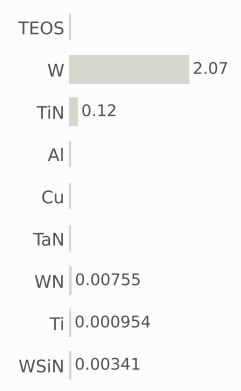

gases emitted (g)

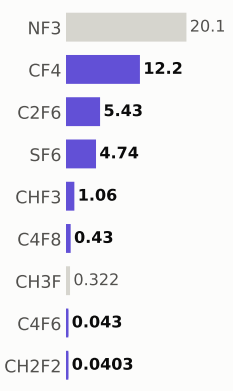

Step #17846.7785: HAR_etch

etch_noop · HAR_etch

1.04	1,926.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

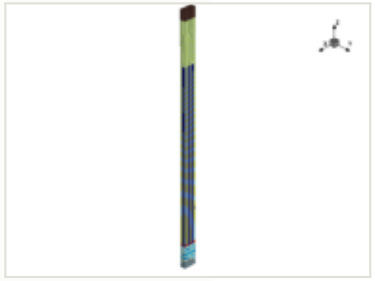



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

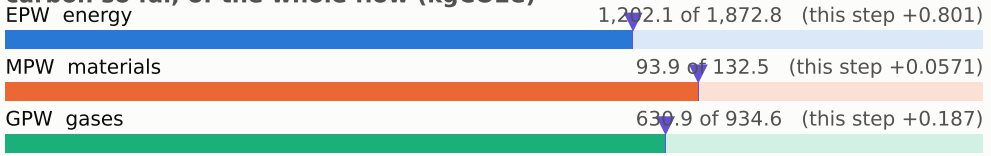

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

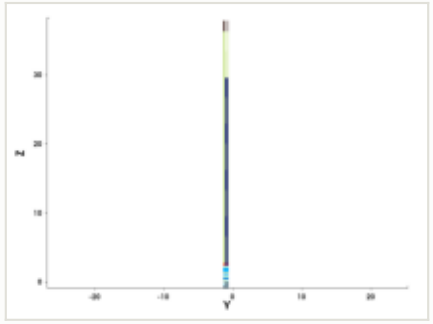

y cut at -1.035 µm

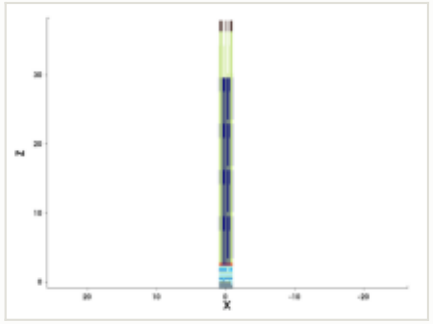

mask for this step

no mask for this step

steps by process area

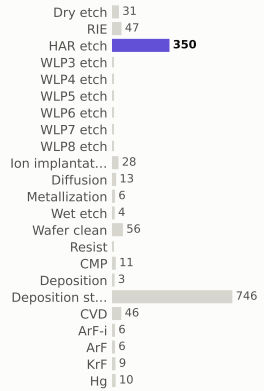

materials deposited (g)

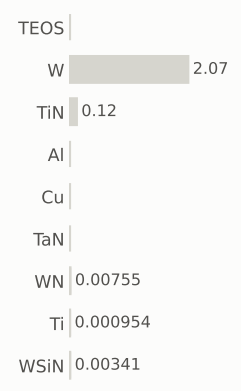

gases emitted (g)

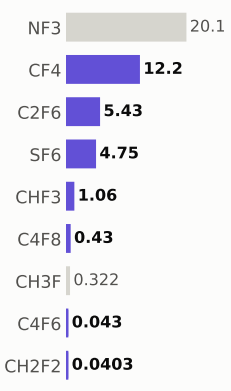

Step #17846.8456: HAR_etch

etch_noop · HAR_etch

1.04	1,927.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

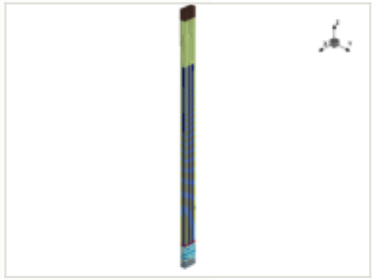

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

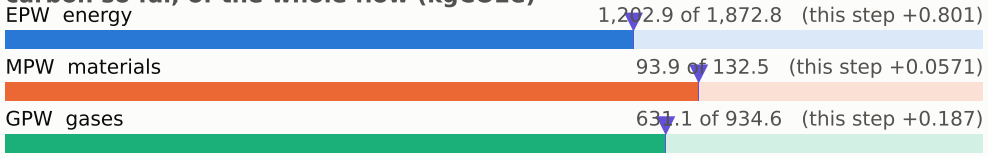

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

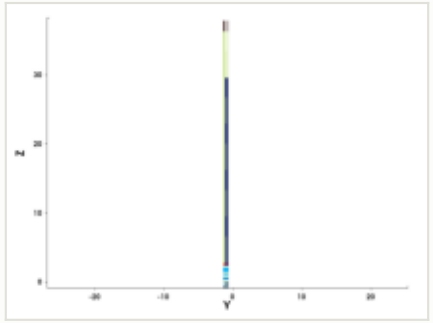

y cut at -1.035 µm

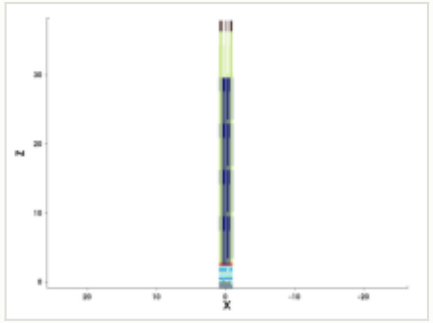

mask for this step

no mask for this step

steps by process area

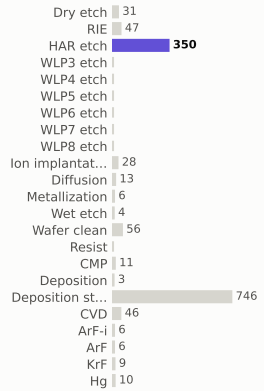

materials deposited (g)

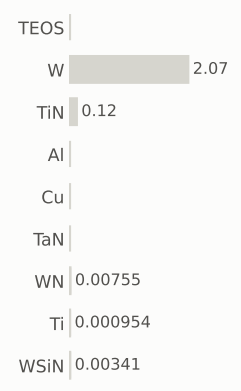

gases emitted (g)

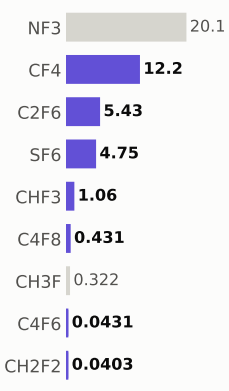

Step #17846.9128: HAR_etch

etch_noop · HAR_etch

1.04	1,929.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

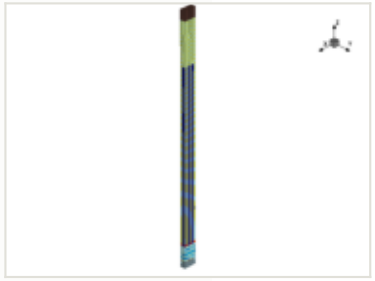

x cut at 0.000 µm

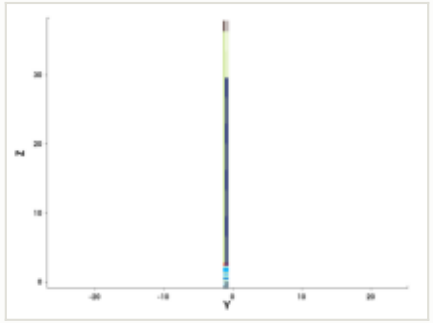

y cut at -1.035 µm

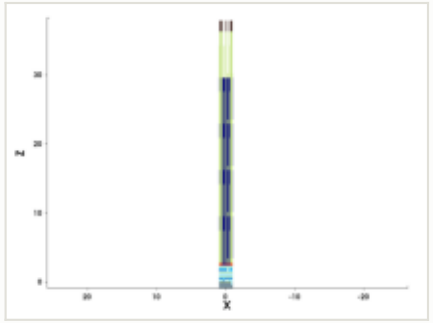

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

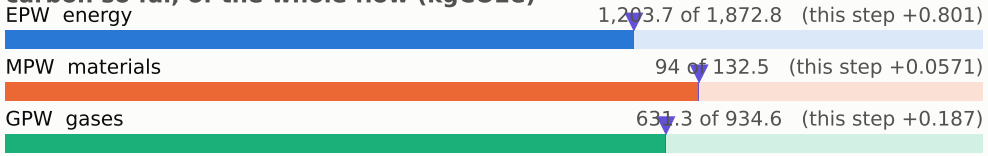

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

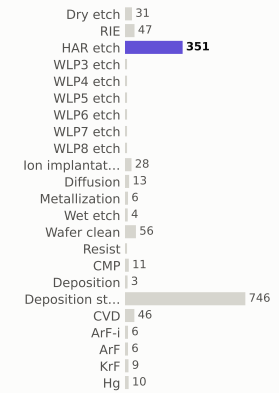

materials deposited (g)



gases emitted (g)

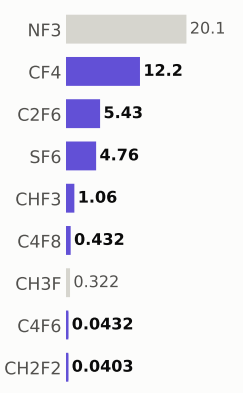

Step #17846.9799: HAR_etch

etch_noop · HAR_etch

1.04	1,930.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

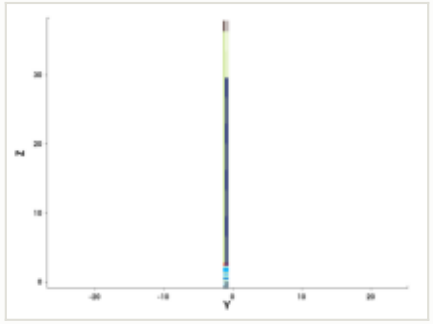

y cut at -1.035 µm

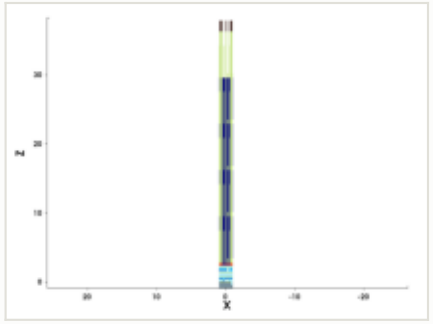

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

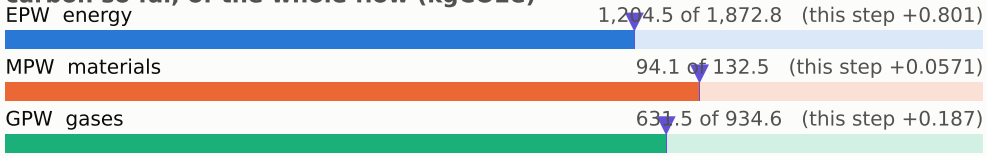

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

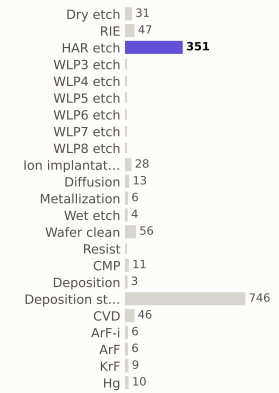

materials deposited (g)

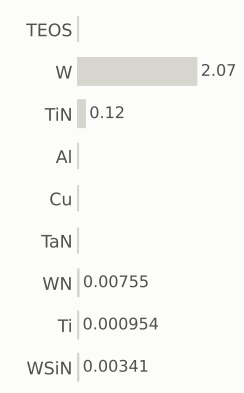

gases emitted (g)

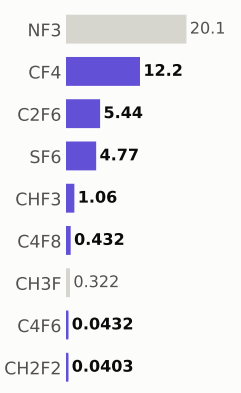

Step #17847.047: HAR_etch

etch_noop · HAR_etch

1.04	1,931.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

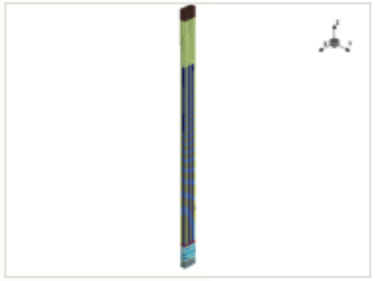



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

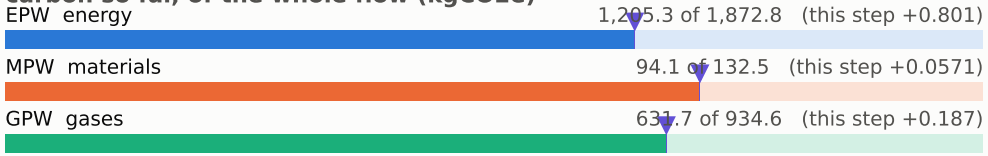

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

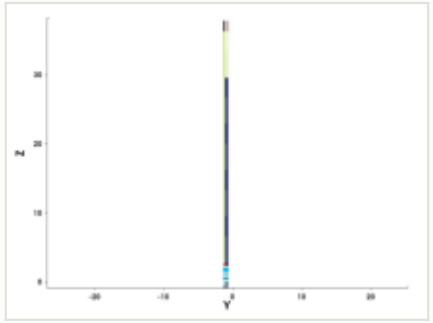

y cut at -1.035 µm

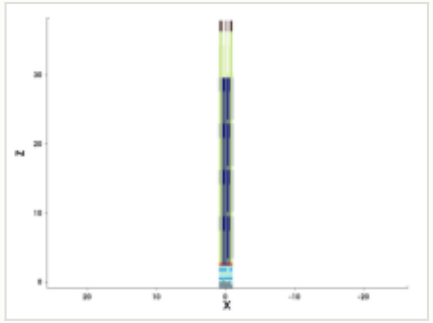

mask for this step

no mask for this step

steps by process area

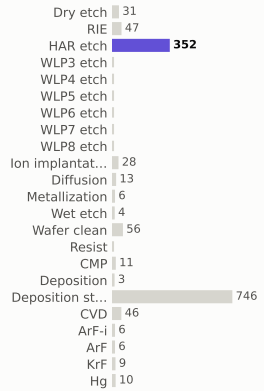

materials deposited (g)

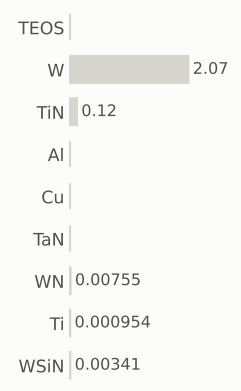

gases emitted (g)

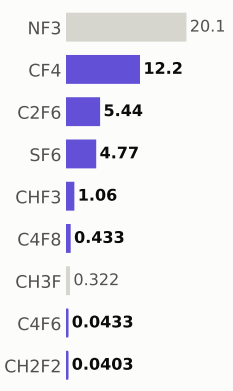

Step #17847.1141: HAR_etch

etch_noop · HAR_etch

1.04	1,932.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

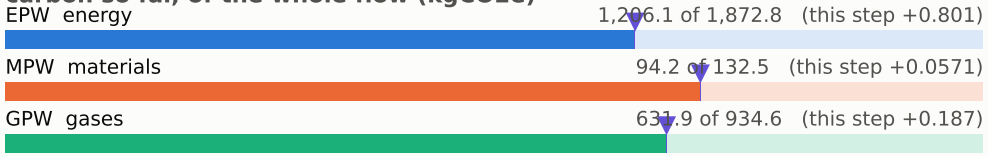

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

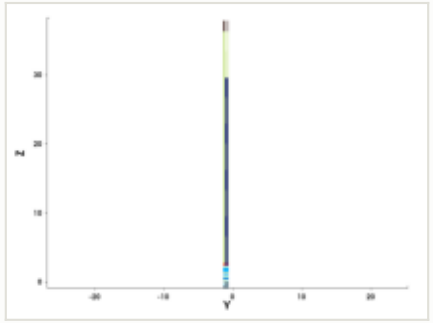

y cut at -1.035 µm

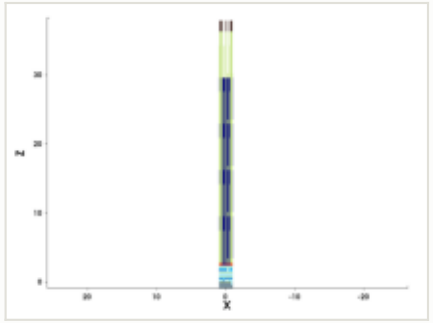

mask for this step

no mask for this step

steps by process area

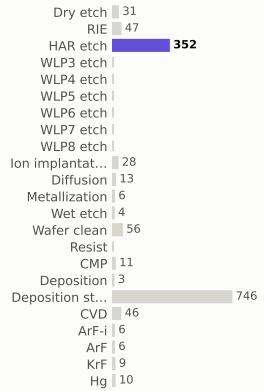

materials deposited (g)

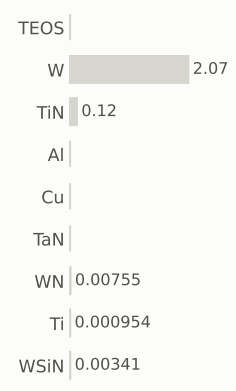

gases emitted (g)

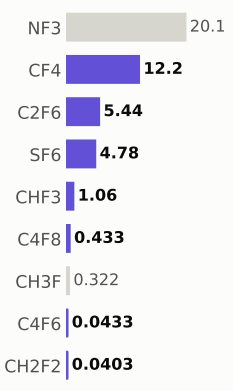

Step #17847.1812: HAR_etch

etch_noop · HAR_etch

1.04	1,933.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

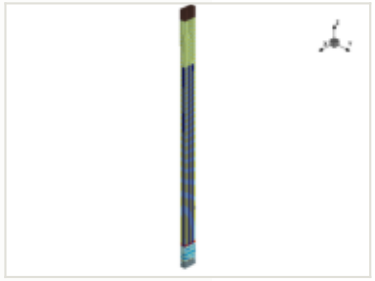



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

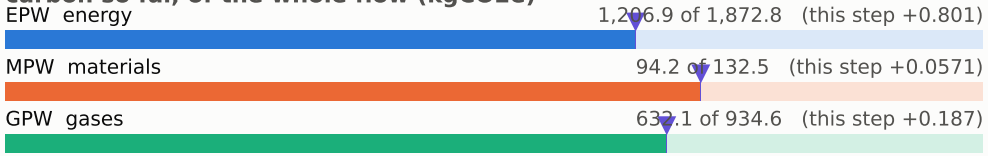

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

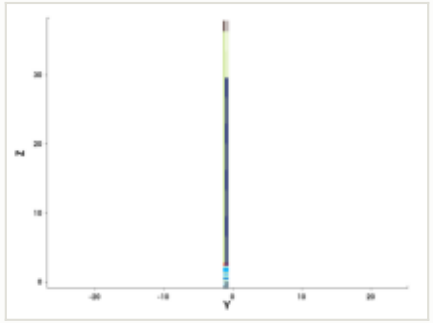

y cut at -1.035 µm

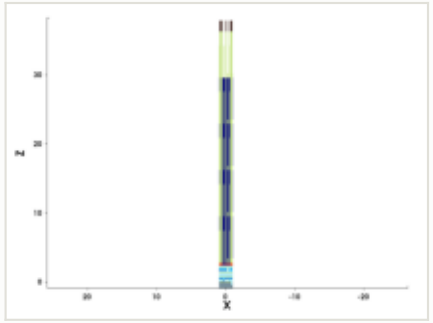

mask for this step

no mask for this step

steps by process area

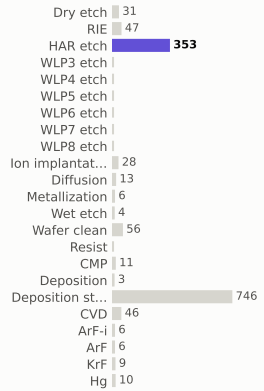

materials deposited (g)

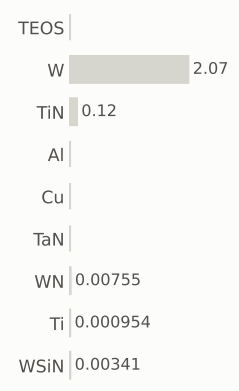

gases emitted (g)

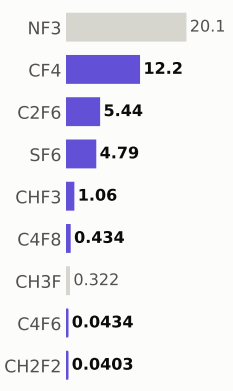

Step #17847.2483: HAR_etch

etch_noop · HAR_etch

1.04	1,934.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

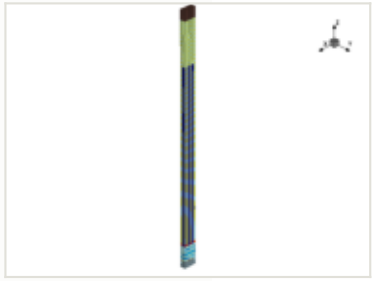



x cut at 0.000 µm

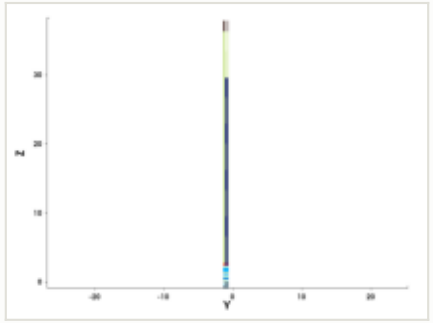

y cut at -1.035 µm

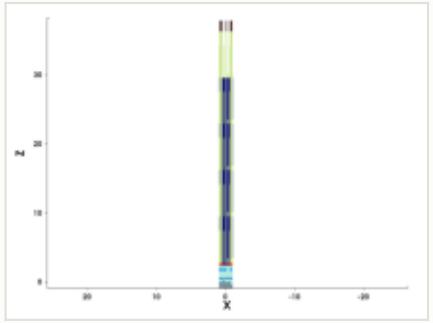

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

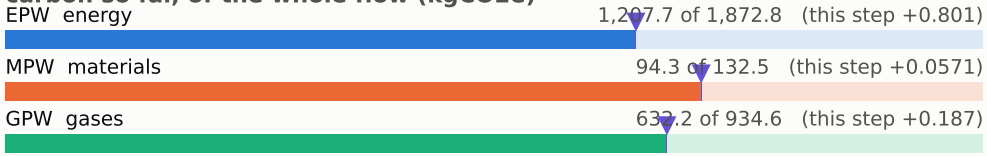

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

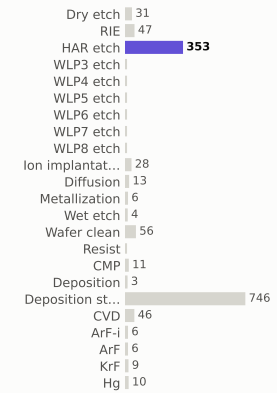

materials deposited (g)

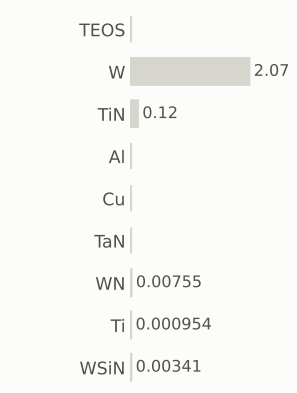

gases emitted (g)

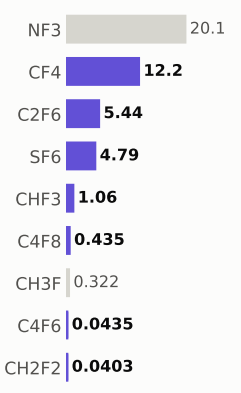

Step #17847.3154: HAR_etch

etch_noop · HAR_etch

1.04	1,935.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

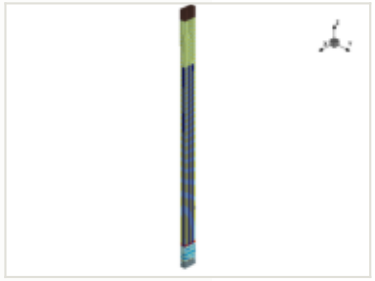

x cut at 0.000 µm

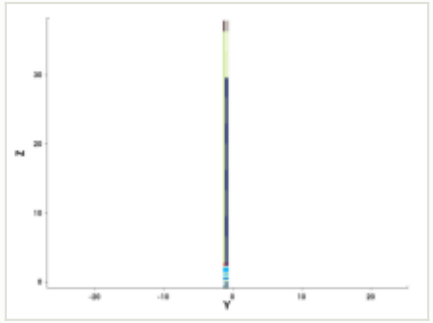

y cut at -1.035 µm

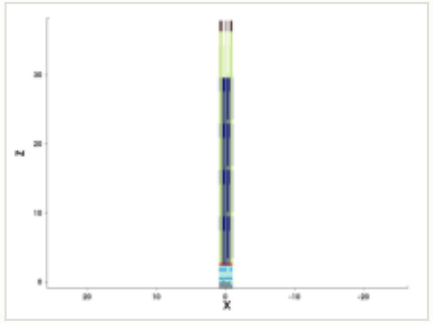

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

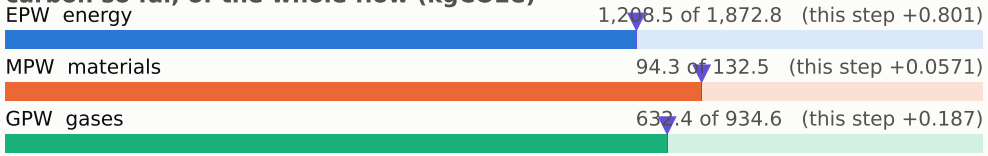

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

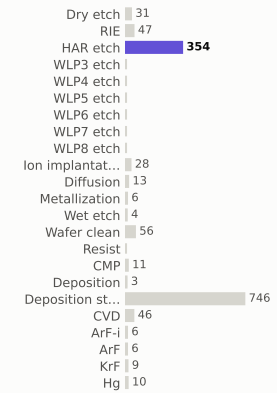

materials deposited (g)



gases emitted (g)

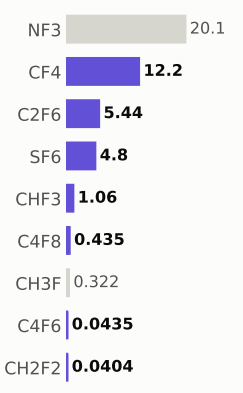

Step #17847.3826: HAR_etch

etch_noop · HAR_etch

1.04	1,936.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

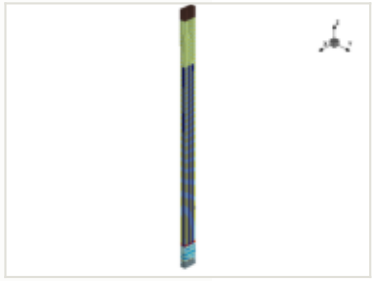

x cut at 0.000 µm

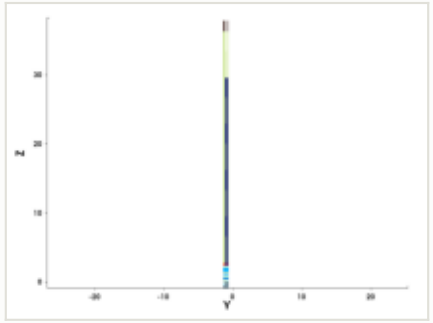

y cut at -1.035 µm

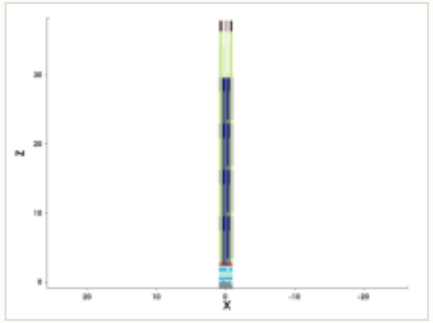

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

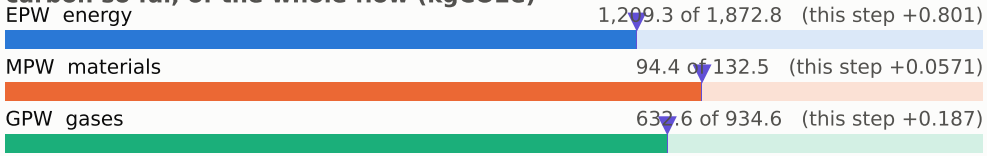

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

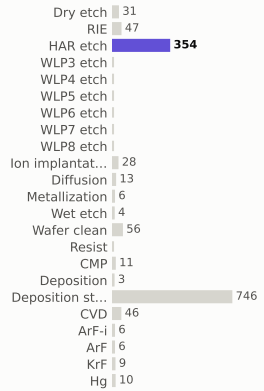

materials deposited (g)

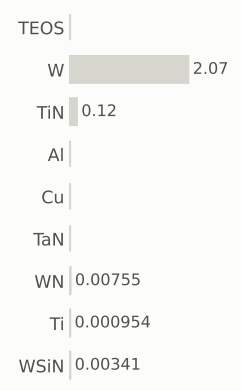

gases emitted (g)

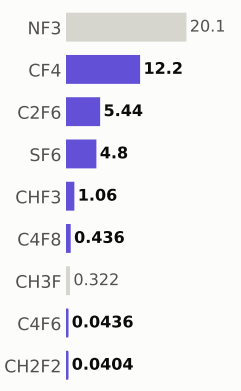

Step #17847.4497: HAR_etch

etch_noop · HAR_etch

1.04	1,937.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

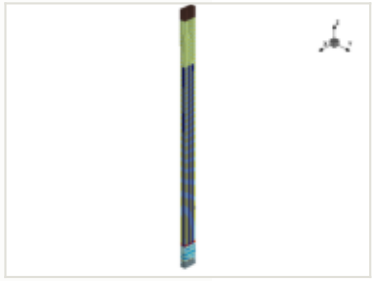



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

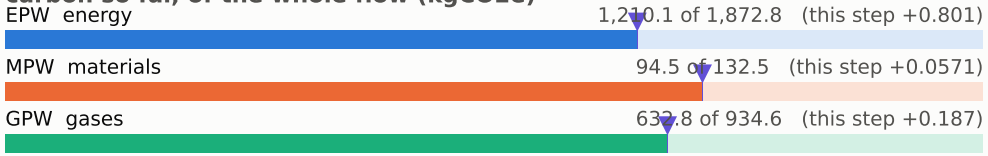

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

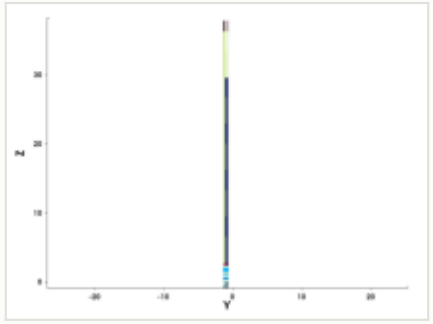

y cut at -1.035 µm

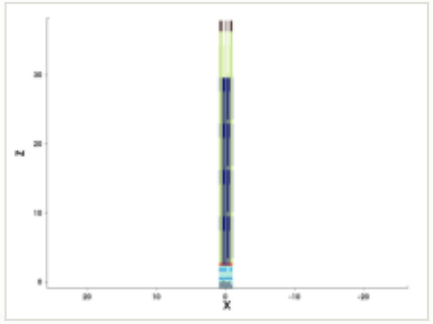

mask for this step

no mask for this step

steps by process area

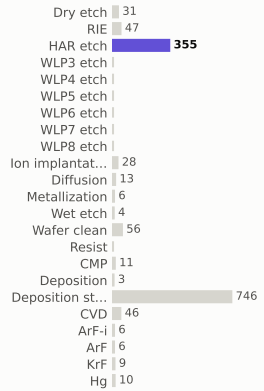

materials deposited (g)

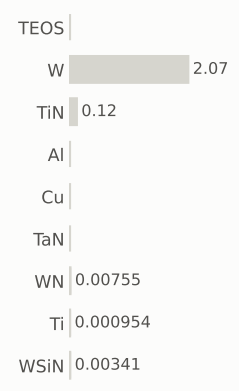

gases emitted (g)

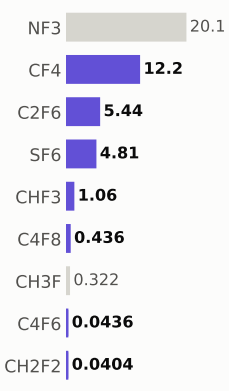

Step #17847.5168: HAR_etch

etch_noop · HAR_etch

1.04	1,938.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

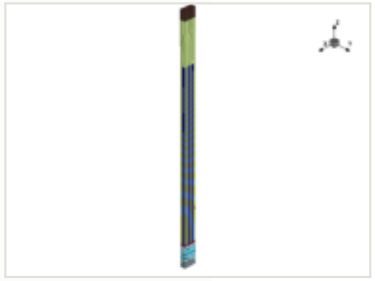

x cut at 0.000 µm

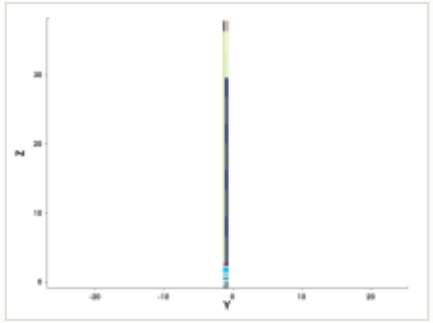

y cut at -1.035 µm

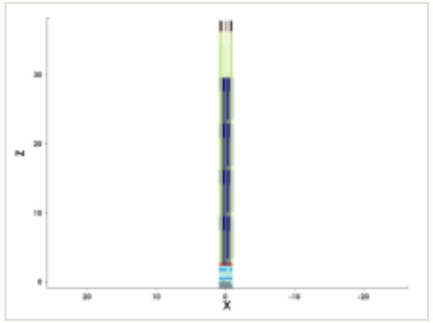

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

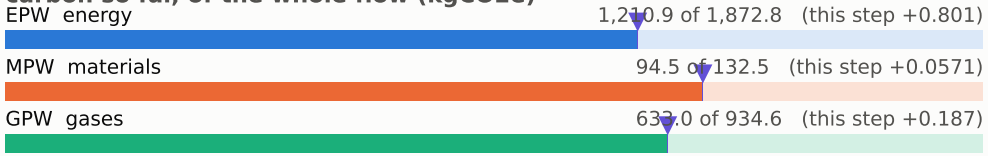

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

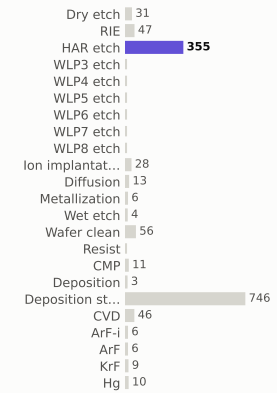

materials deposited (g)

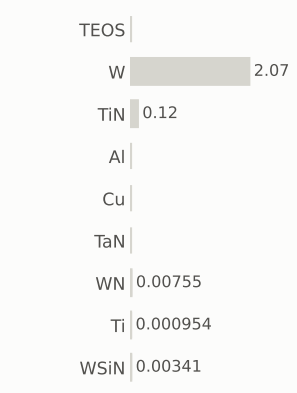

gases emitted (g)

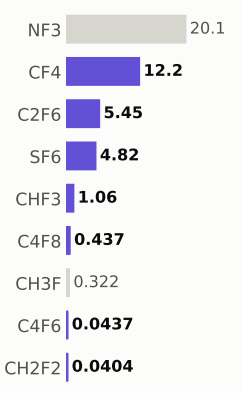

Step #17847.5839: HAR_etch

etch_noop · HAR_etch

1.04	1,939.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

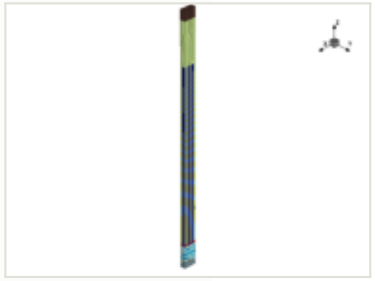



x cut at 0.000 µm

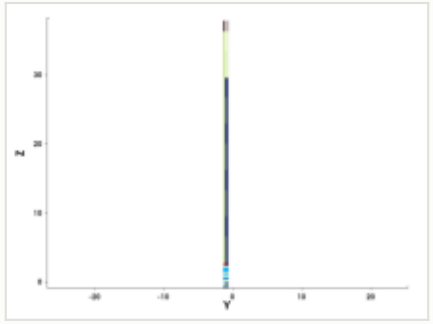

y cut at -1.035 µm

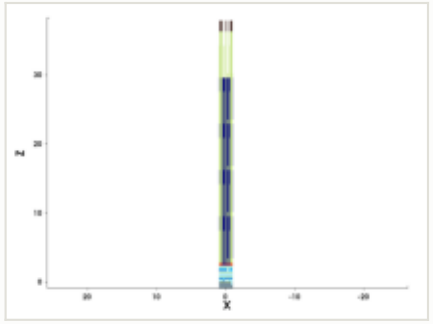

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

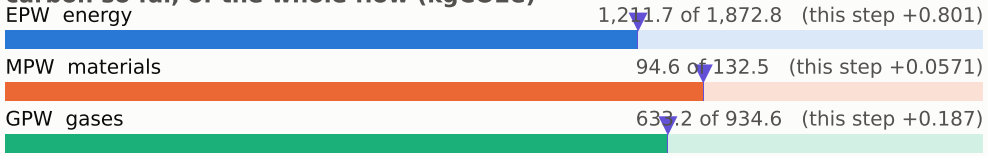

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

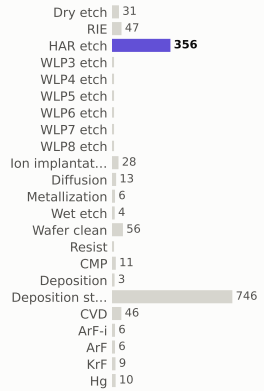

materials deposited (g)

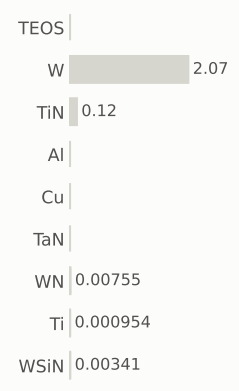

gases emitted (g)

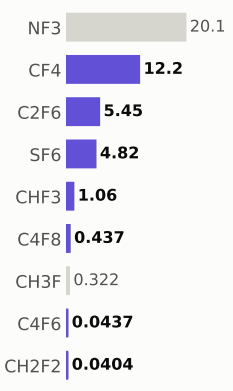

Step #17847.651: HAR_etch

etch_noop · HAR_etch

1.04	1,940.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

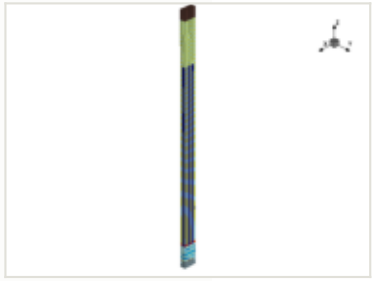

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

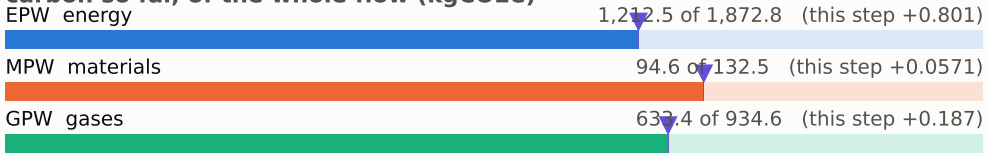

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

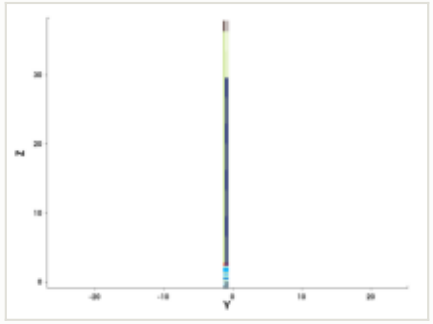

y cut at -1.035 µm

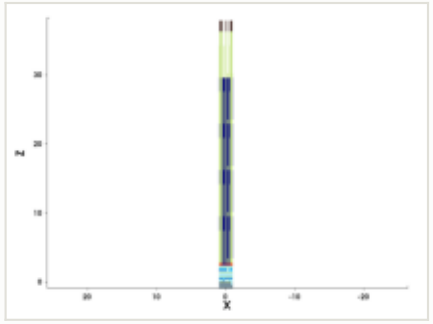

mask for this step

no mask for this step

steps by process area

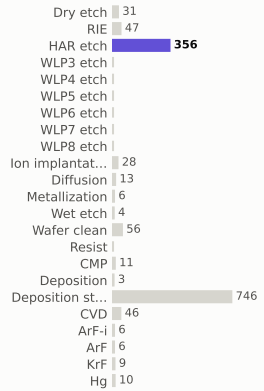

materials deposited (g)

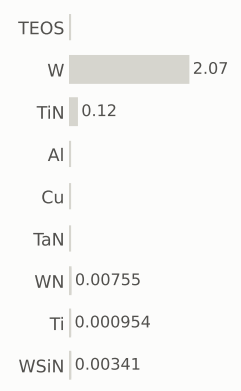

gases emitted (g)

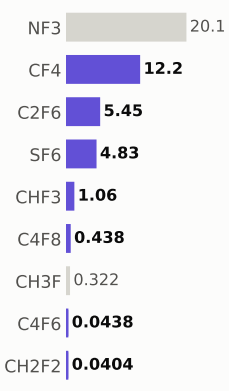

Step #17847.7181: HAR_etch

etch_noop · HAR_etch

1.04	1,941.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

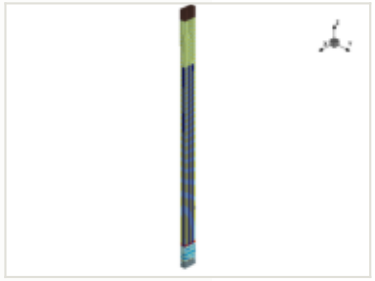

x cut at 0.000 µm

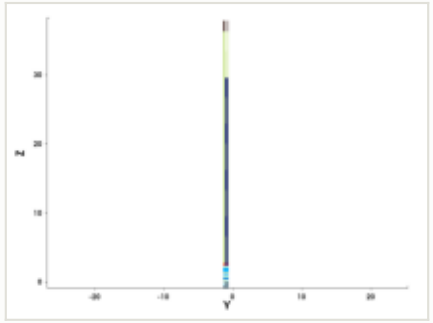

y cut at -1.035 µm

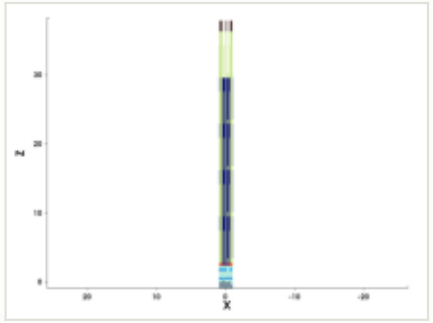

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

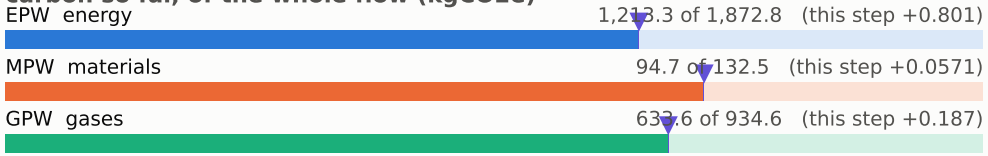

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

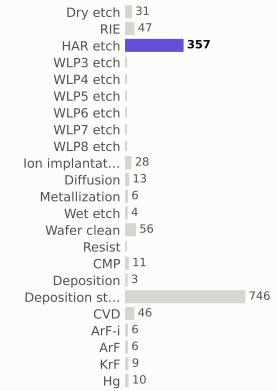

materials deposited (g)

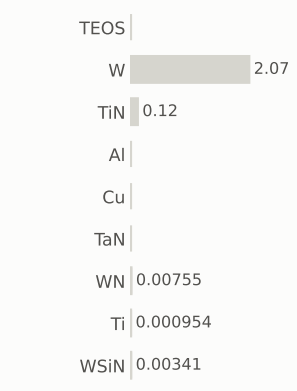

gases emitted (g)

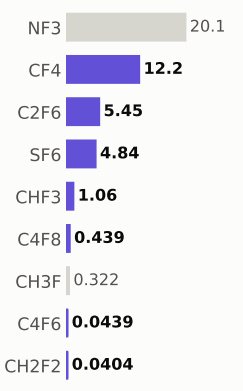

Step #17847.7852: HAR_etch

etch_noop · HAR_etch

1.04	1,942.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

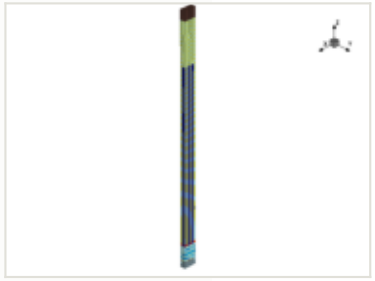

x cut at 0.000 µm

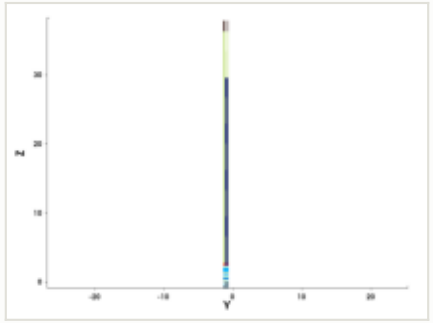

y cut at -1.035 µm

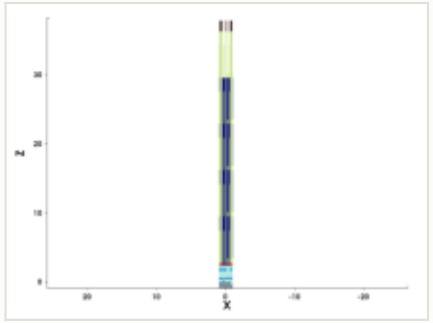

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

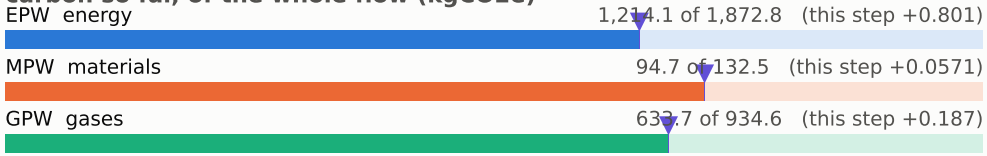

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

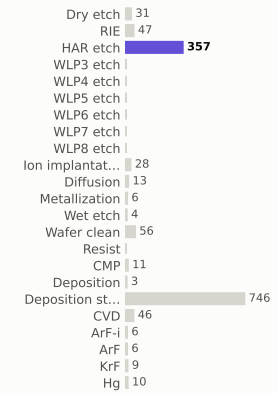

materials deposited (g)

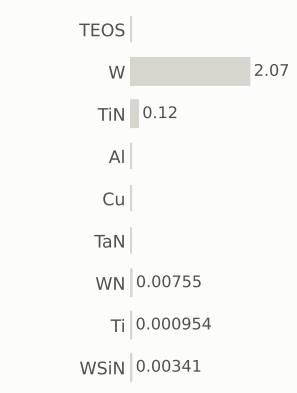

gases emitted (g)

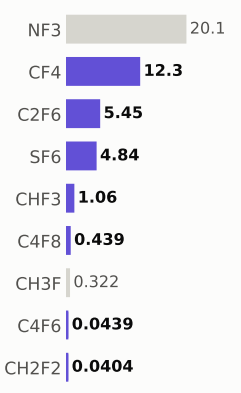

Step #17847.8523: HAR_etch

etch_noop · HAR_etch

1.04	1,943.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

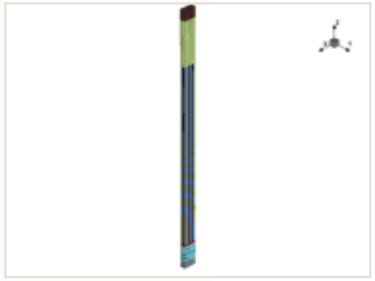

x cut at 0.000 µm

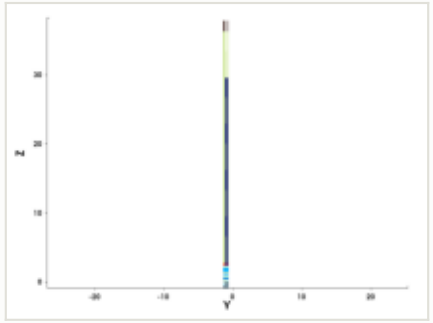

y cut at -1.035 µm

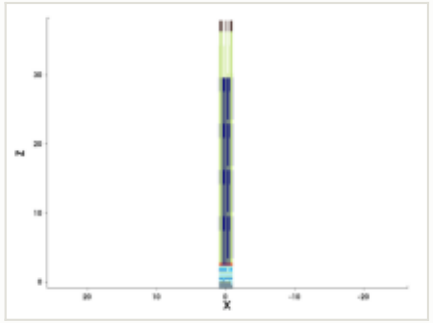

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

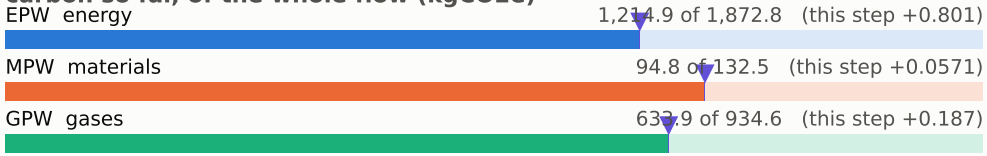

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

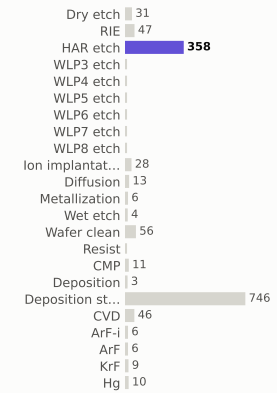

materials deposited (g)

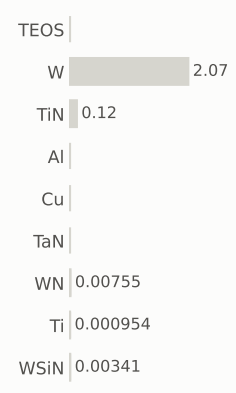

gases emitted (g)

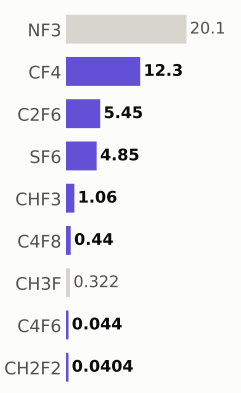

Step #17847.9195: HAR_etch

etch_noop · HAR_etch

1.04	1,944.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

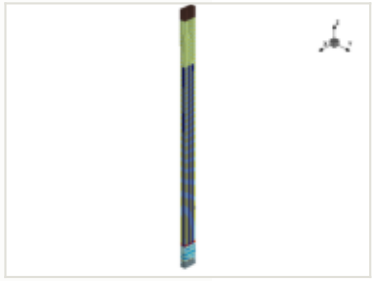

x cut at 0.000 µm

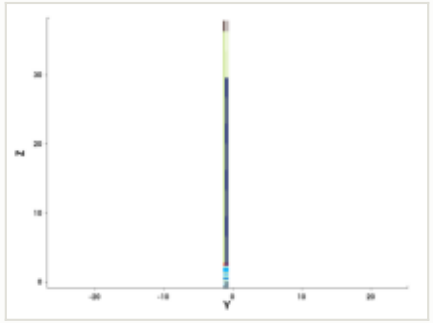

y cut at -1.035 µm

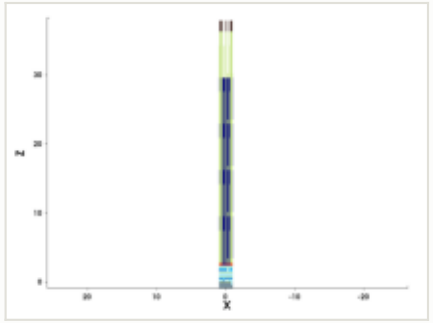

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

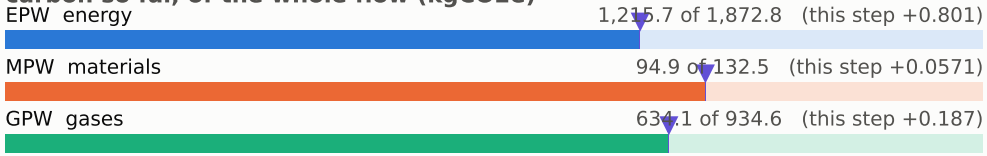

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

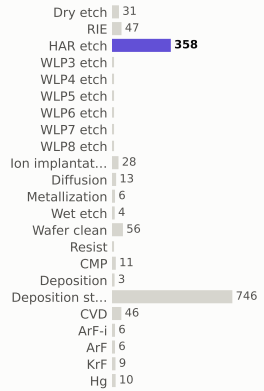

materials deposited (g)

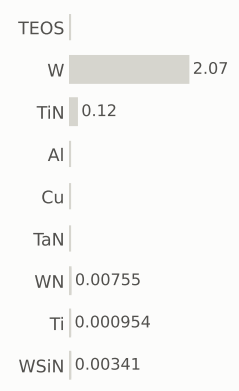

gases emitted (g)

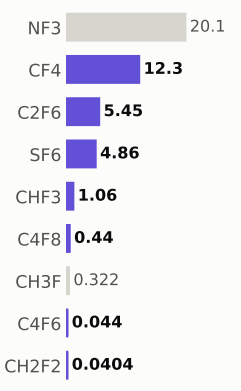

Step #17847.9866: HAR_etch

etch_noop · HAR_etch

1.04	1,945.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

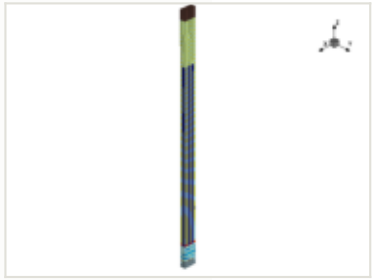

x cut at 0.000 µm

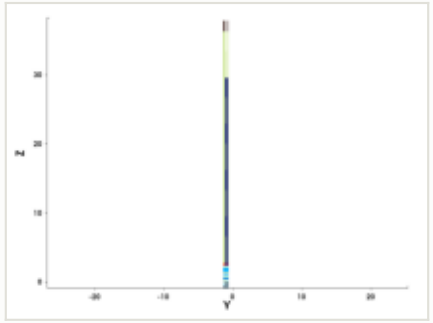

y cut at -1.035 µm

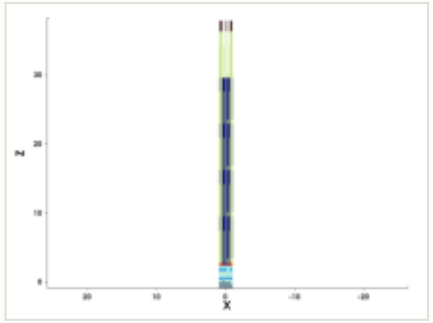

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

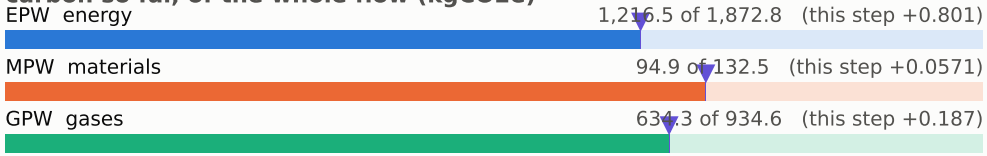

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

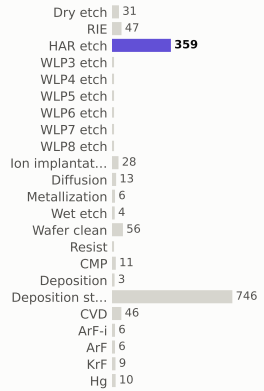

materials deposited (g)

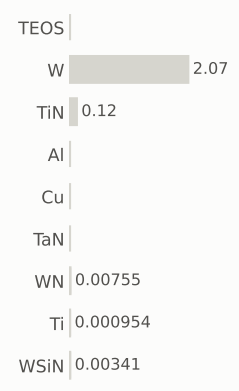

gases emitted (g)

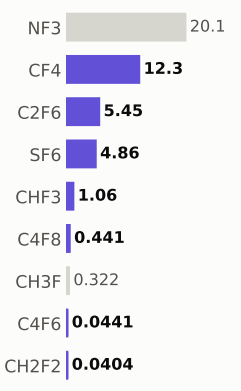

Step #17848.0537: HAR_etch

etch_noop · HAR_etch

1.04	1,946.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

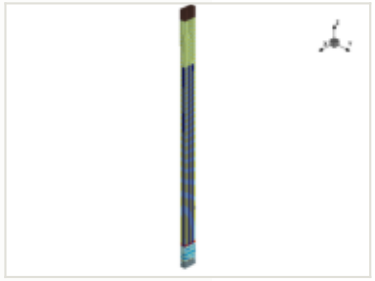

x cut at 0.000 µm

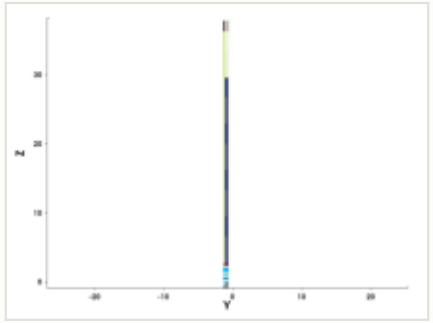

y cut at -1.035 µm

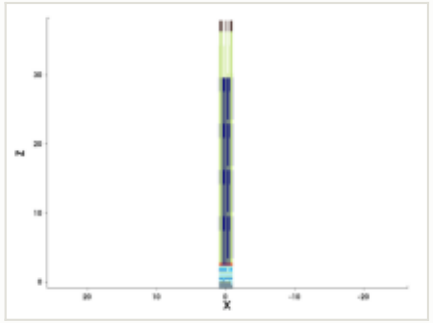

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

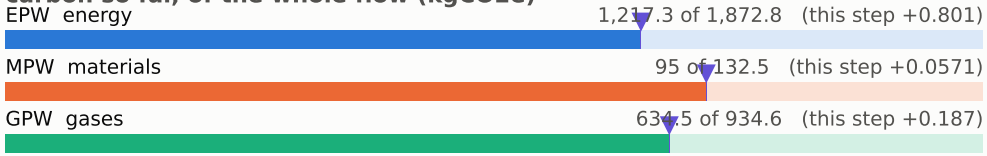

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

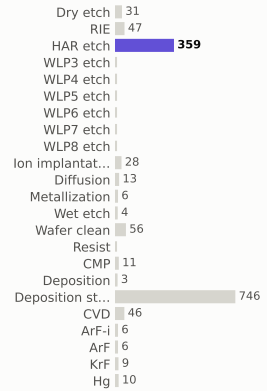

materials deposited (g)

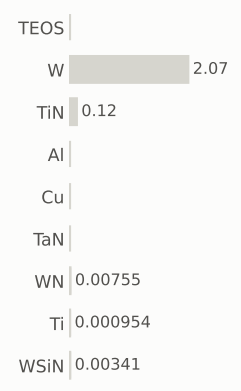

gases emitted (g)

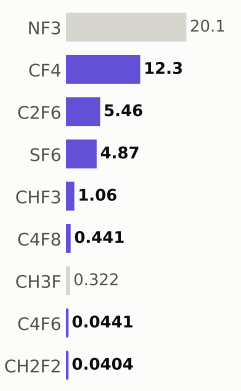

Step #17848.1208: HAR_etch

etch_noop · HAR_etch

1.04	1,947.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

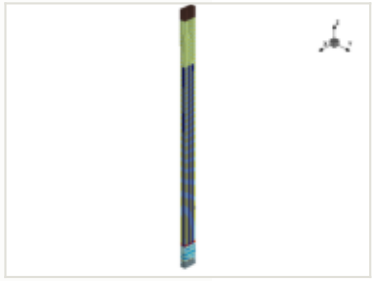

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

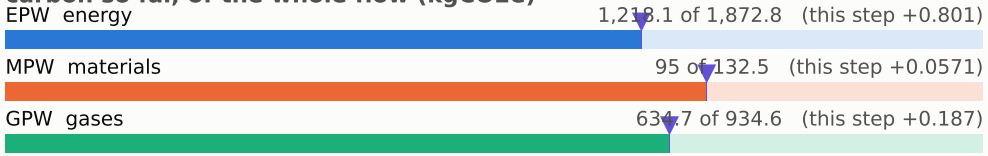

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

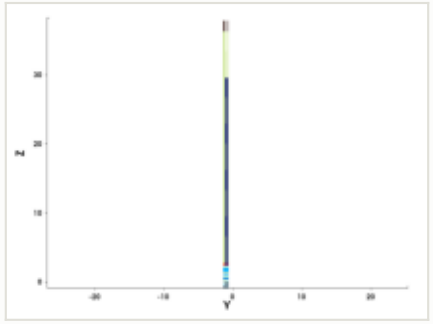

y cut at -1.035 µm

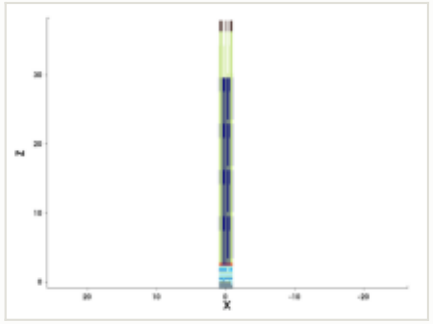

mask for this step

no mask for this step

steps by process area

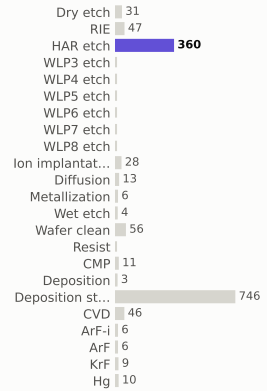

materials deposited (g)

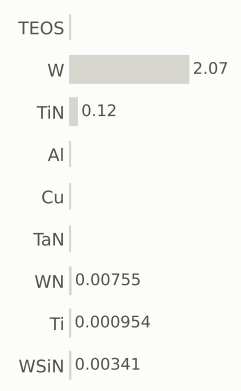

gases emitted (g)

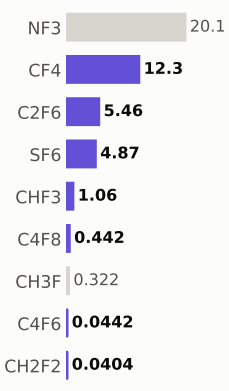

Step #17848.1879: HAR_etch

etch_noop · HAR_etch

1.04	1,948.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

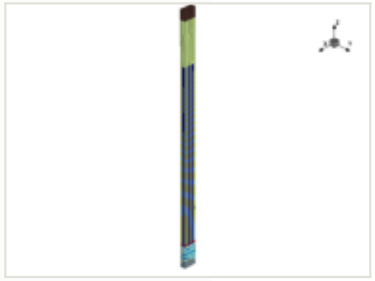

x cut at 0.000 µm

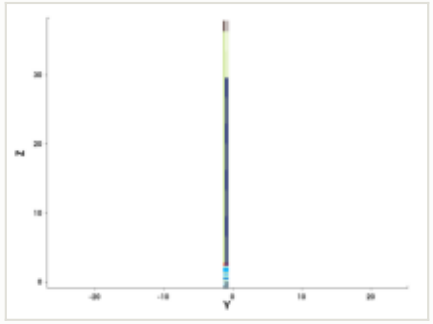

y cut at -1.035 µm

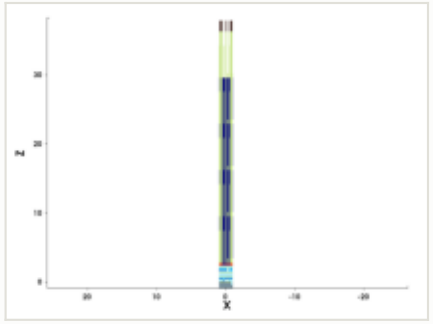

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

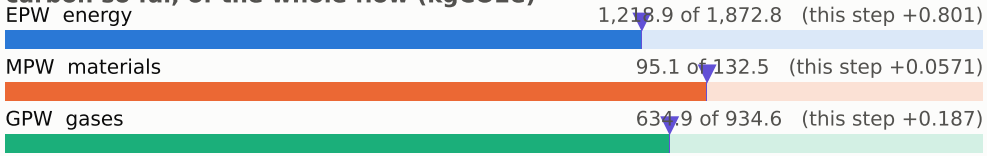

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

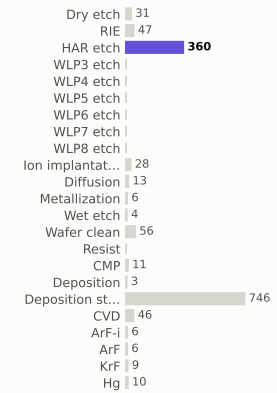

materials deposited (g)

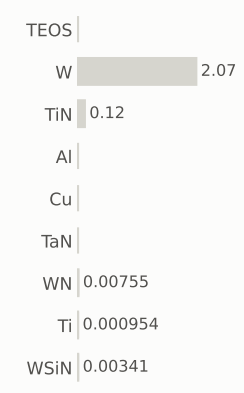

gases emitted (g)

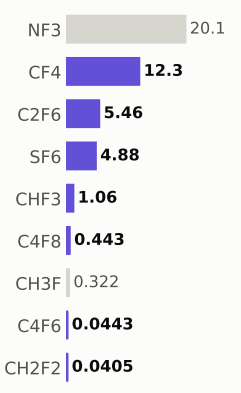

Step #17848.255: HAR_etch

etch_noop · HAR_etch

1.04	1,949.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

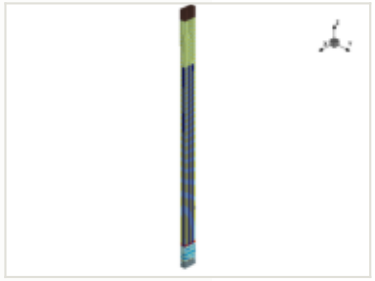

x cut at 0.000 µm

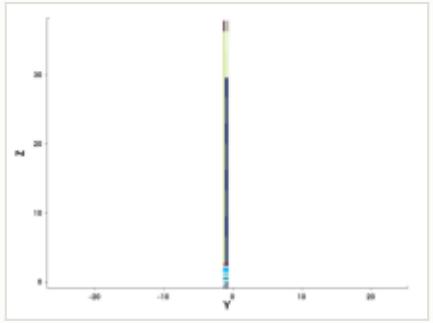

y cut at -1.035 µm

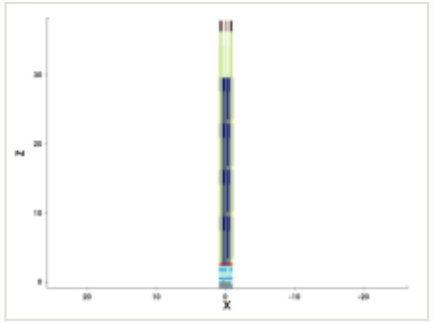

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

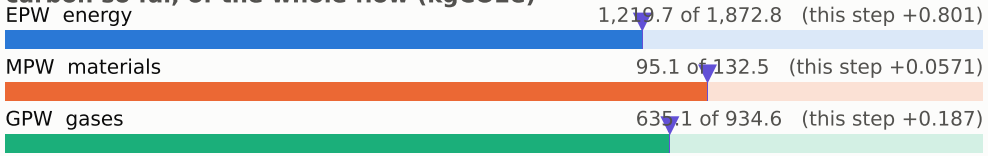

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

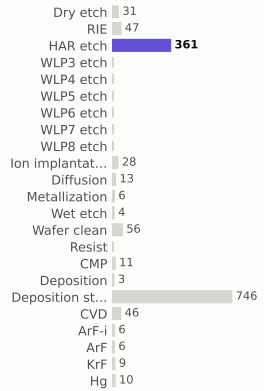

materials deposited (g)

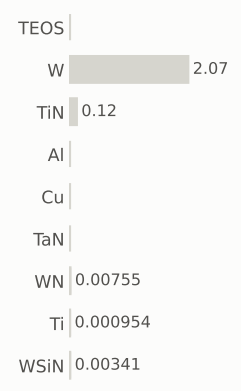

gases emitted (g)

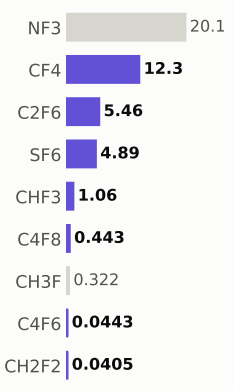

Step #17848.3221: HAR_etch

etch_noop · HAR_etch

1.04	1,950.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

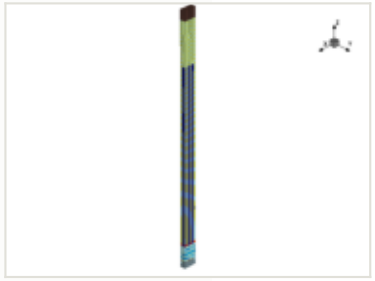

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

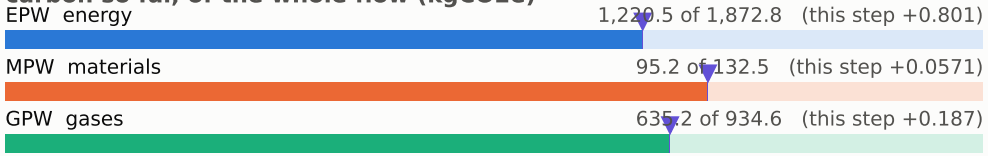

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

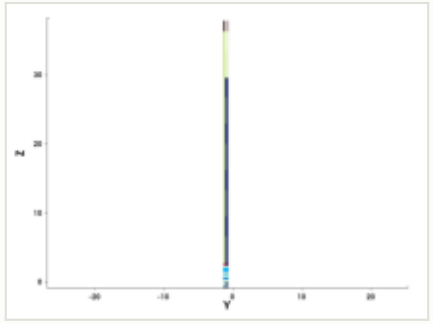

y cut at -1.035 µm

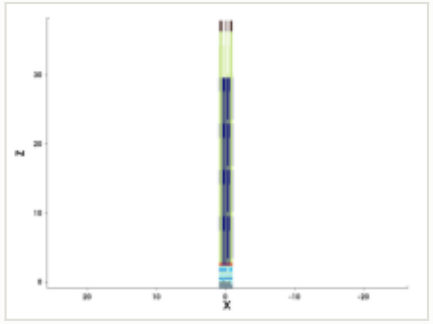

mask for this step

no mask for this step

steps by process area

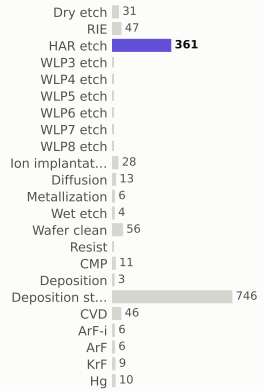

materials deposited (g)

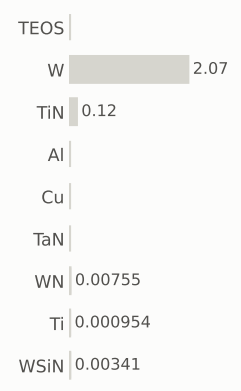

gases emitted (g)

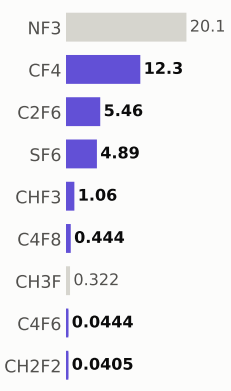

Step #17848.3893: HAR_etch

etch_noop · HAR_etch

1.04	1,952.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

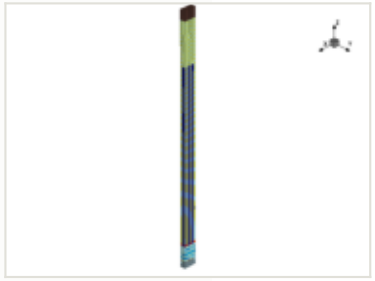

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

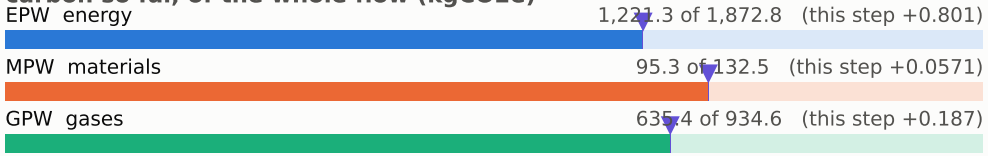

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

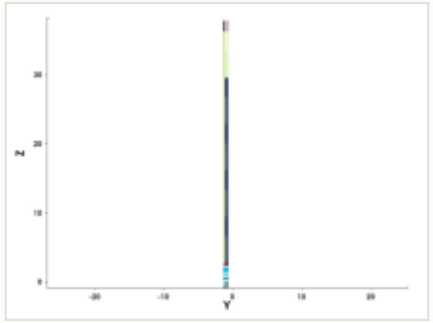

y cut at -1.035 µm

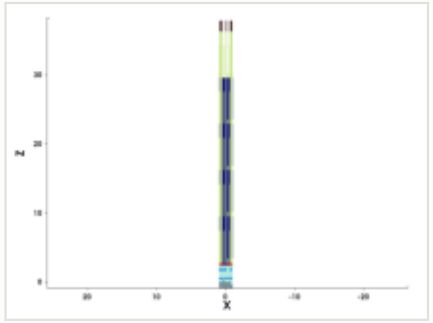

mask for this step

no mask for this step

steps by process area

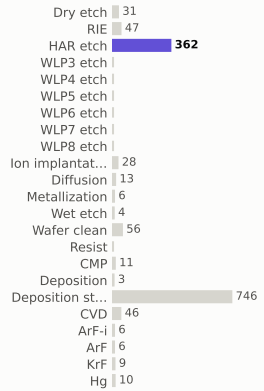

materials deposited (g)

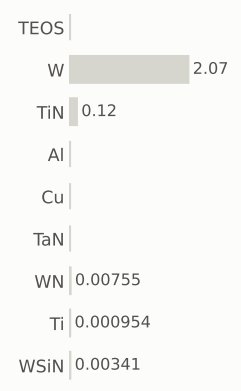

gases emitted (g)

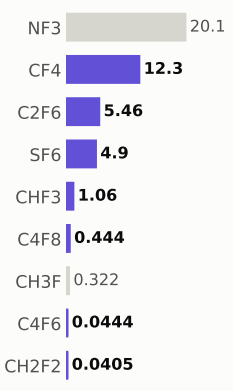

Step #17848.4564: HAR_etch

etch_noop · HAR_etch

1.04	1,953.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

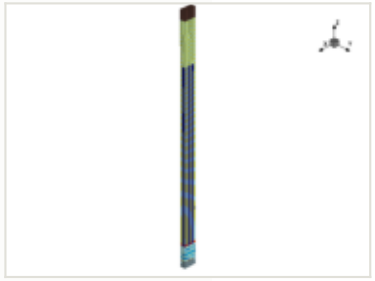

x cut at 0.000 µm

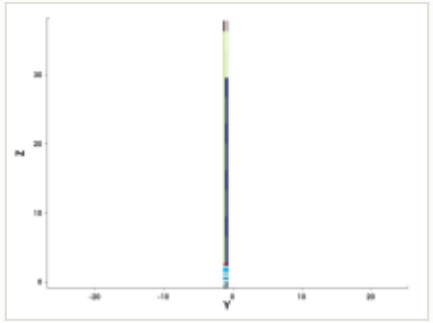

y cut at -1.035 µm

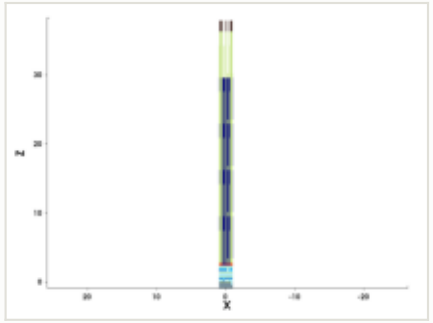

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

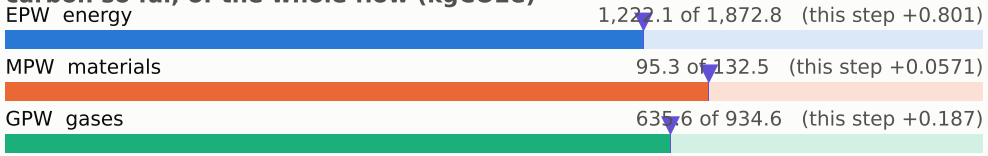

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

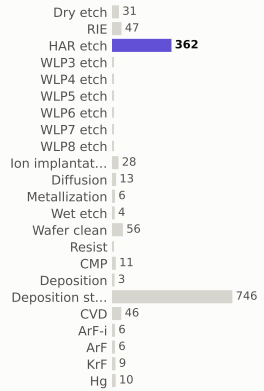

materials deposited (g)

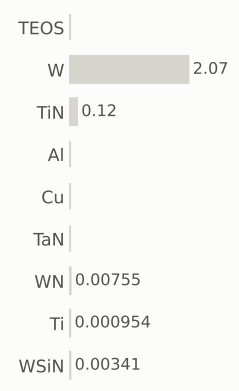

gases emitted (g)

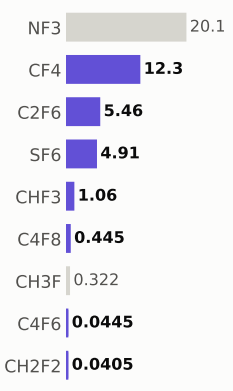

Step #17848.5235: HAR_etch

etch_noop · HAR_etch

1.04	1,954.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

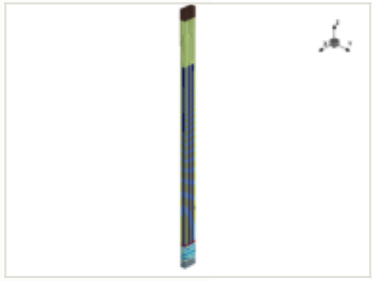

x cut at 0.000 µm

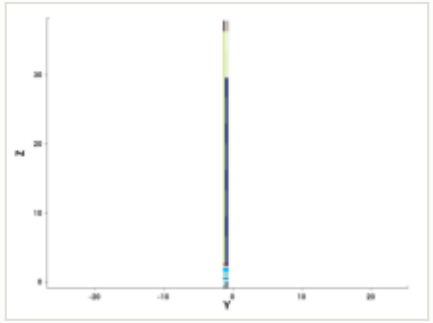

y cut at -1.035 µm

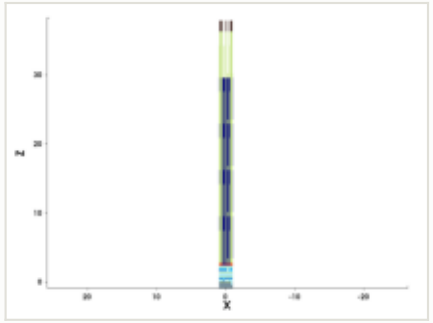

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

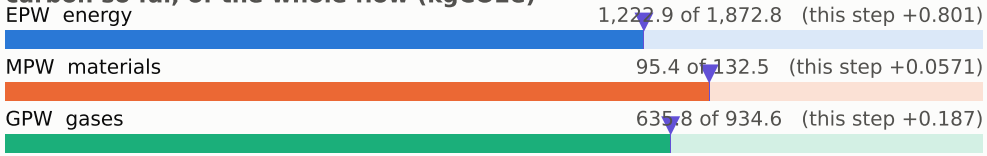

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

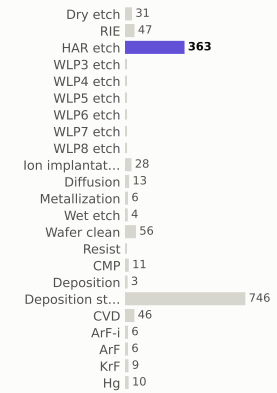

materials deposited (g)

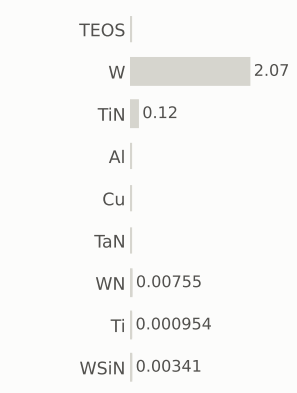

gases emitted (g)

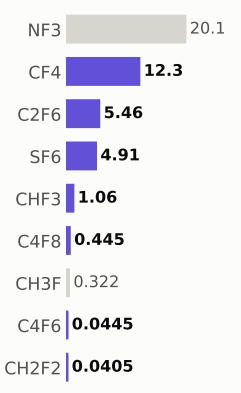

Step #17848.5906: HAR_etch

etch_noop · HAR_etch

1.04	1,955.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

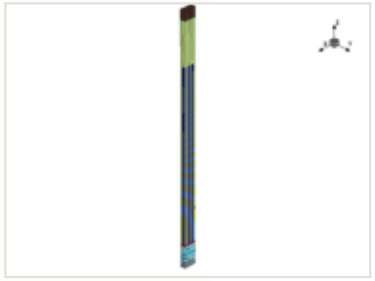

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

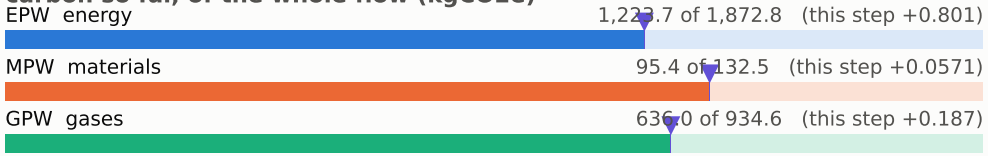

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

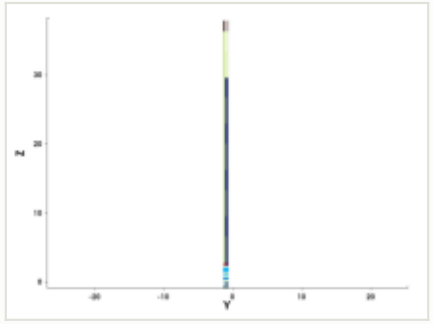

y cut at -1.035 µm

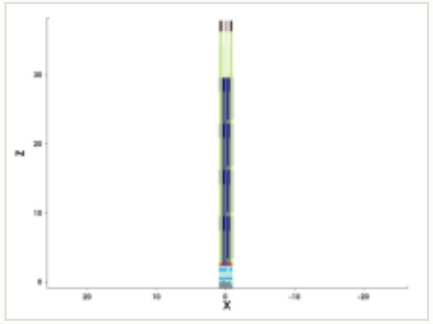

mask for this step

no mask for this step

steps by process area

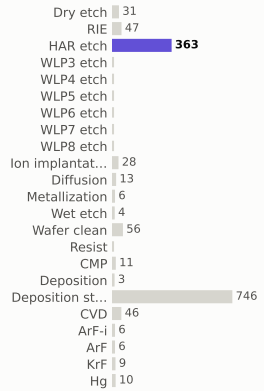

materials deposited (g)

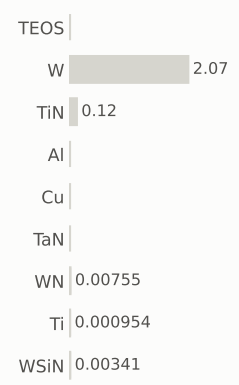

gases emitted (g)

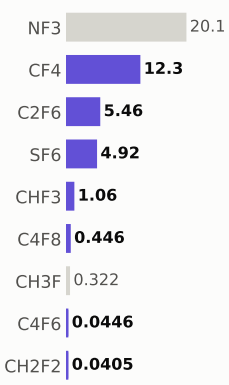

Step #17848.6577: HAR_etch

etch_noop · HAR_etch

1.04	1,956.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

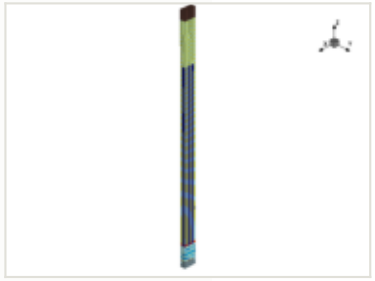

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

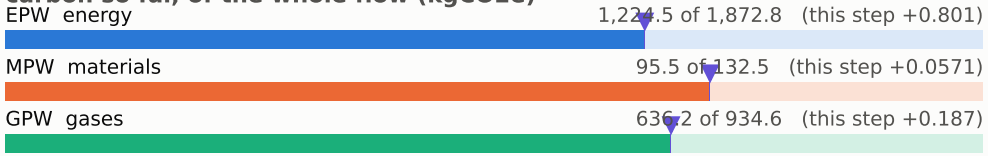

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

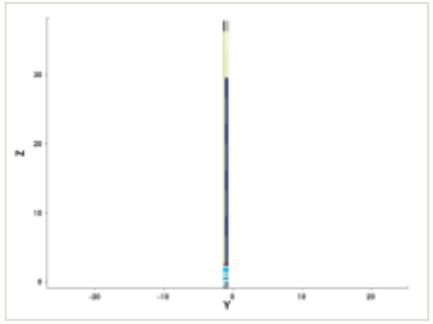

y cut at -1.035 µm

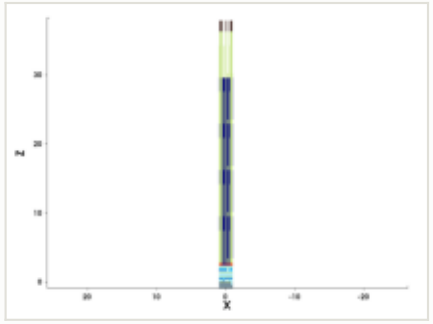

mask for this step

no mask for this step

steps by process area

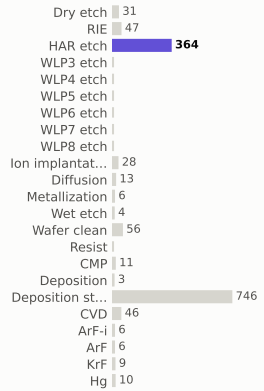

materials deposited (g)

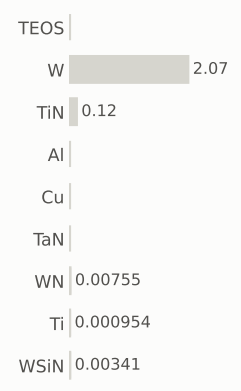

gases emitted (g)

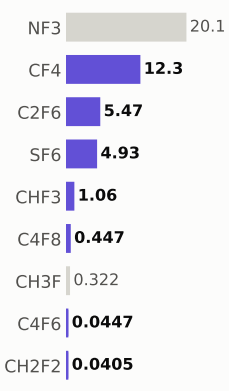

Step #17848.7248: HAR_etch

etch_noop · HAR_etch

1.04	1,957.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

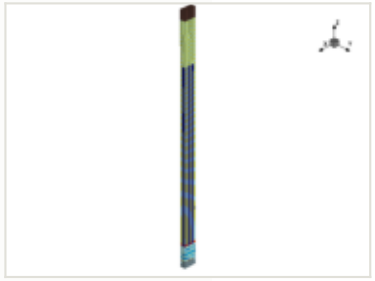

x cut at 0.000 µm

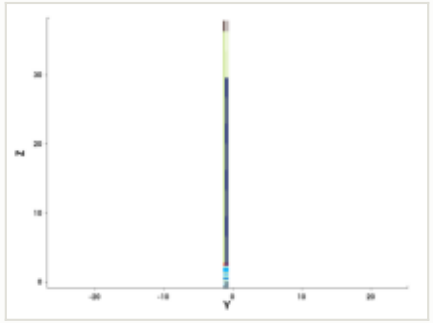

y cut at -1.035 µm

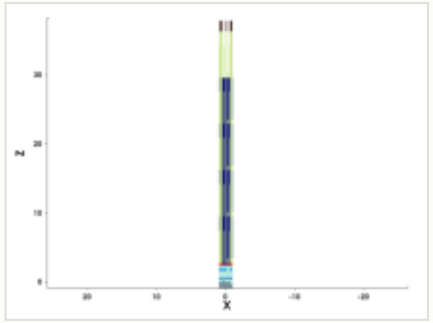

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

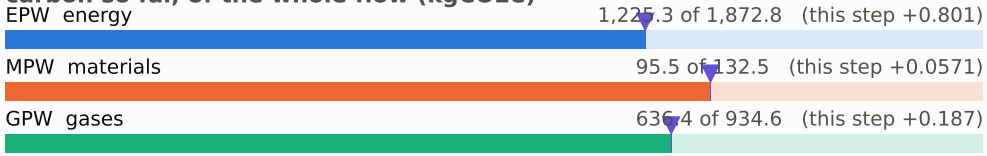

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

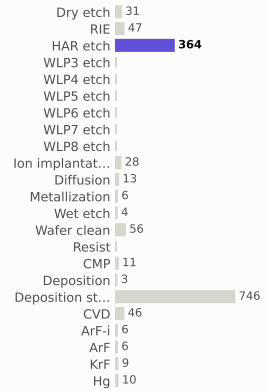

materials deposited (g)

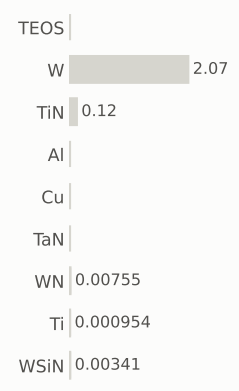

gases emitted (g)

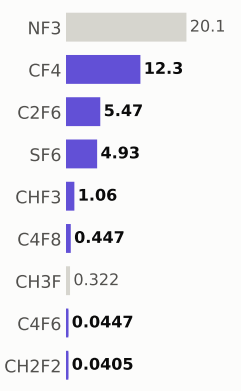

Step #17848.7919: HAR_etch

etch_noop · HAR_etch

1.04	1,958.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

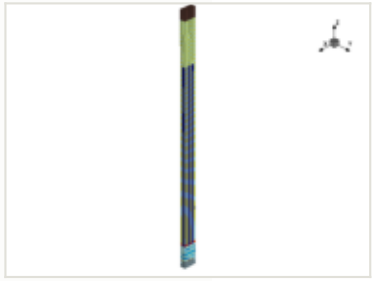

x cut at 0.000 µm

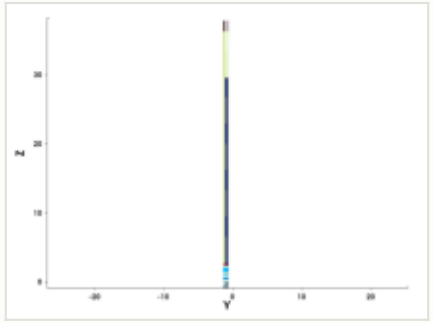

y cut at -1.035 µm

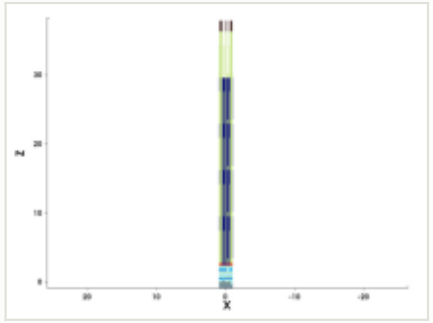

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

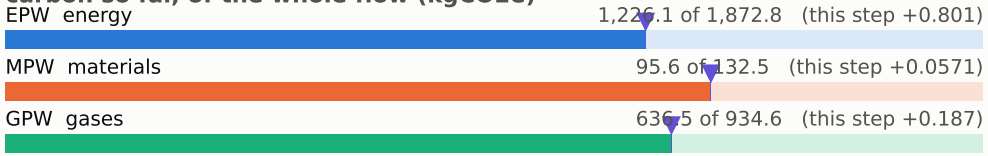

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

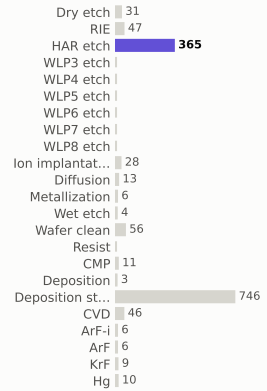

materials deposited (g)

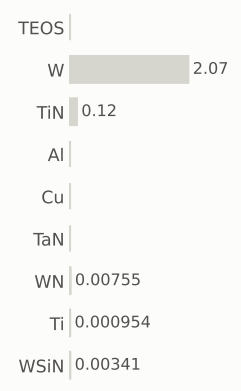

gases emitted (g)

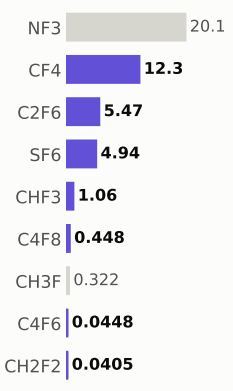

Step #17848.8591: HAR_etch

etch_noop · HAR_etch

1.04	1,959.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

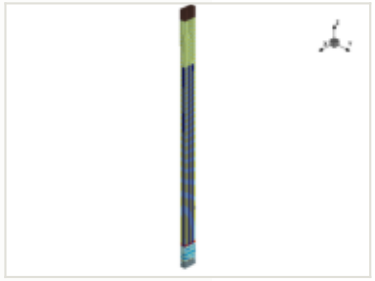

x cut at 0.000 µm

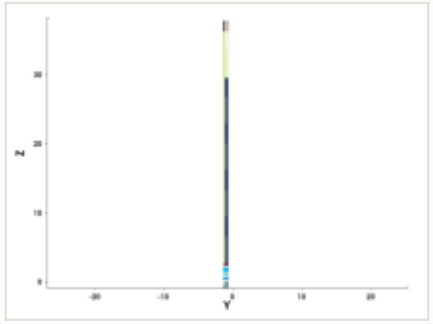

y cut at -1.035 µm

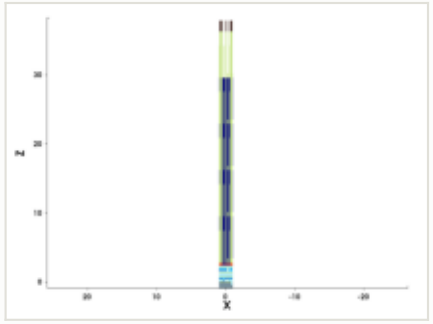

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

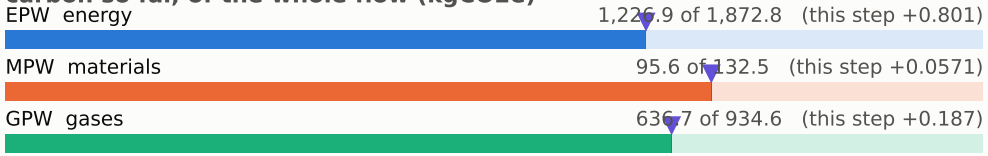

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

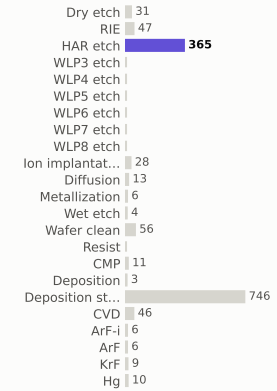

materials deposited (g)

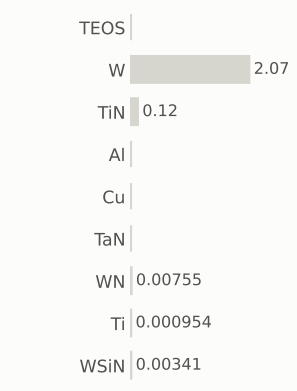

gases emitted (g)

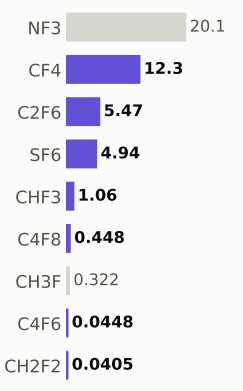

Step #17848.9262: HAR_etch

etch_noop · HAR_etch

1.04	1,960.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

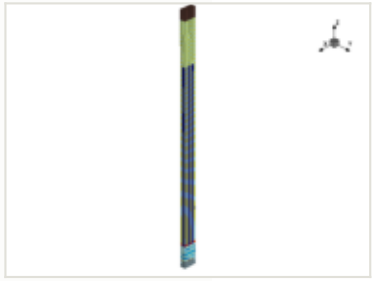

x cut at 0.000 µm

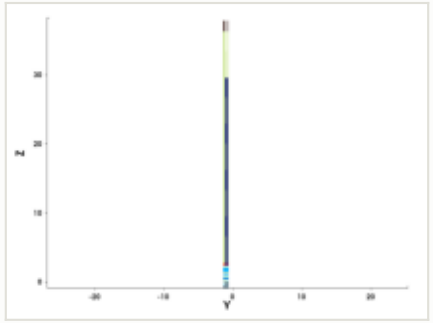

y cut at -1.035 µm

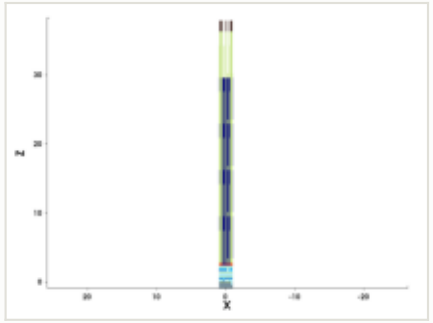

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

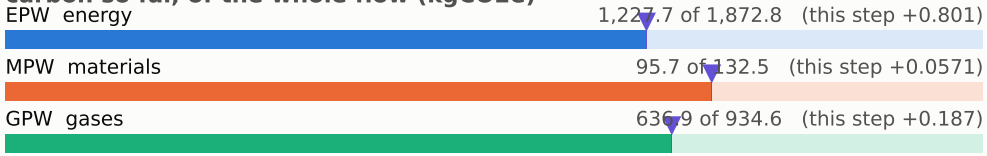

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

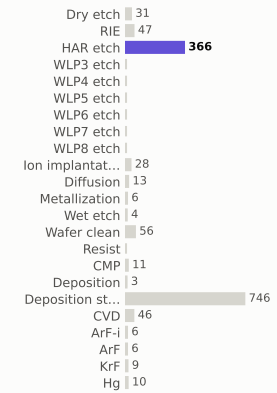

materials deposited (g)

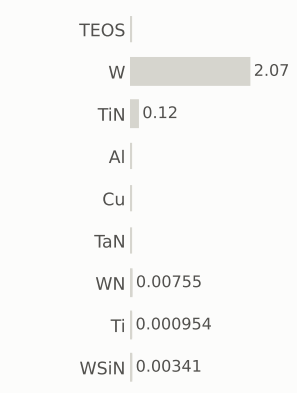

gases emitted (g)

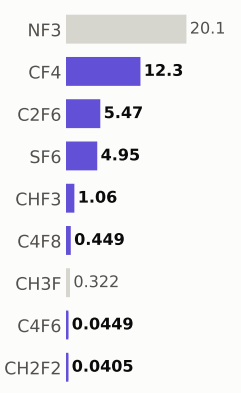

Step #17848.9933: HAR_etch

etch_noop · HAR_etch

1.04	1,961.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

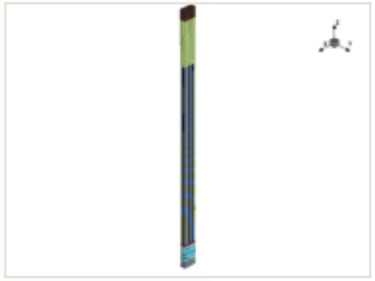

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

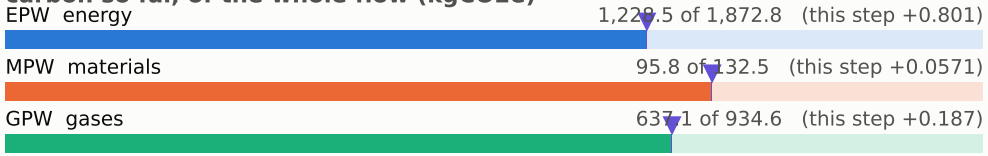

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

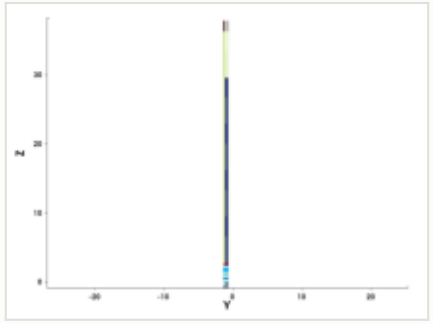

y cut at -1.035 µm

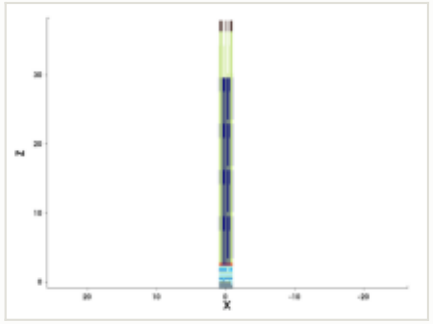

mask for this step

no mask for this step

steps by process area

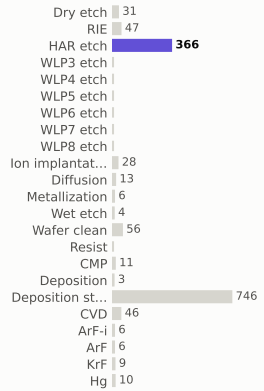

materials deposited (g)

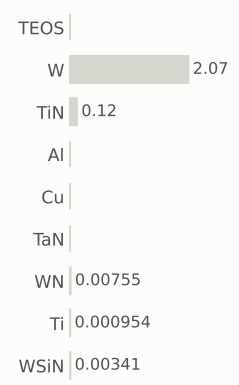

gases emitted (g)

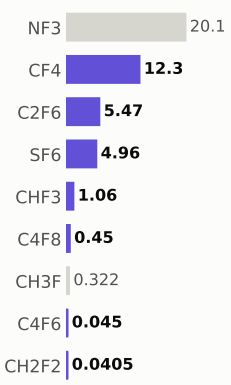

Step #17849.0604: HAR_etch

etch_noop · HAR_etch

1.04	1,962.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

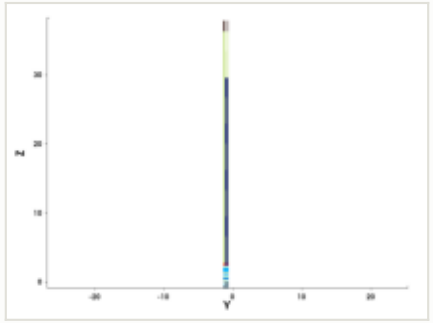

y cut at -1.035 µm

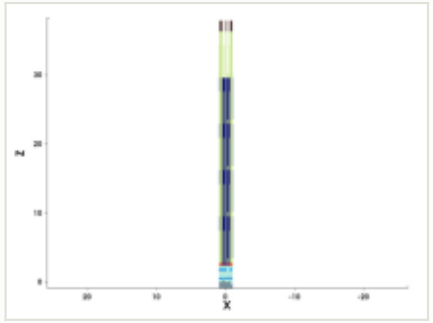

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

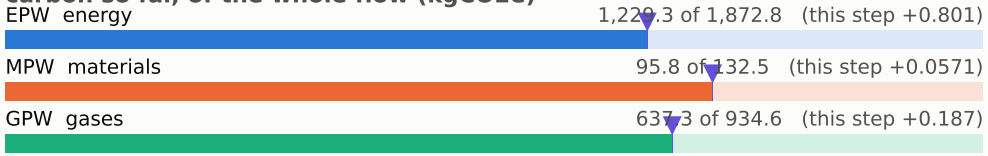

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

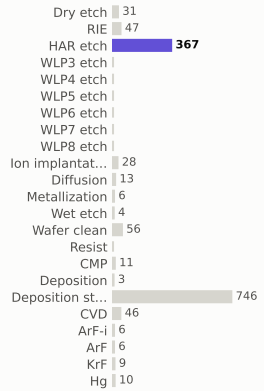

materials deposited (g)

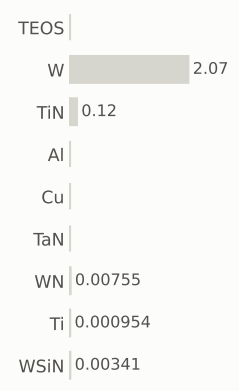

gases emitted (g)

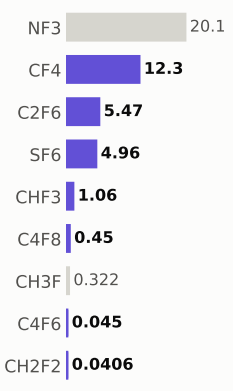

Step #17849.1275: HAR_etch

etch_noop · HAR_etch

1.04	1,963.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

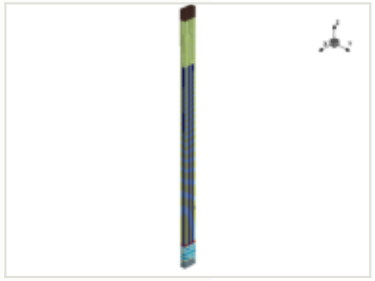

x cut at 0.000 µm

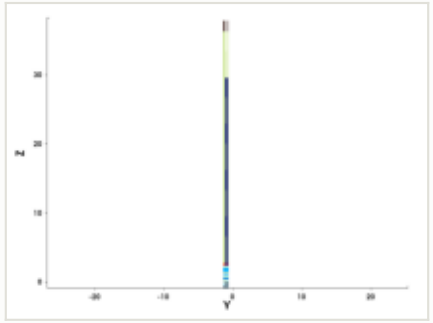

y cut at -1.035 µm

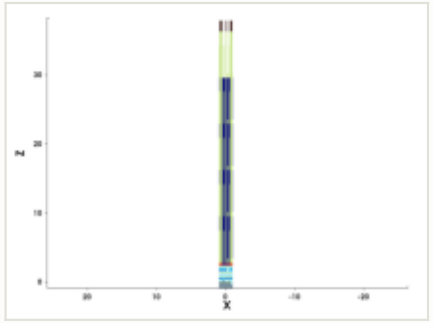

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

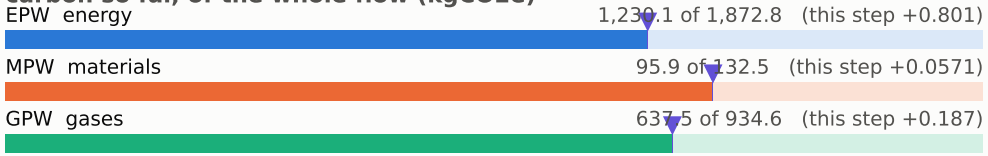

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

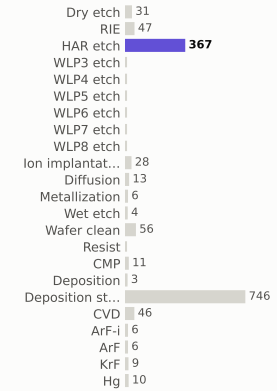

materials deposited (g)

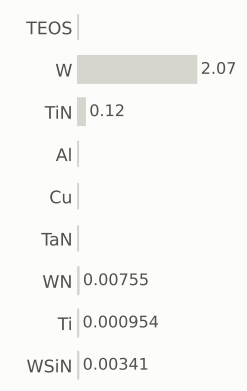

gases emitted (g)

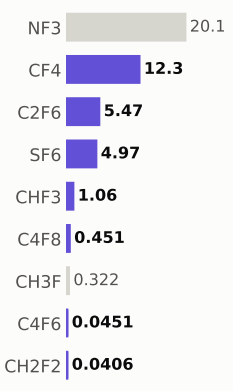

Step #17849.1946: HAR_etch

etch_noop · HAR_etch

1.04	1,964.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

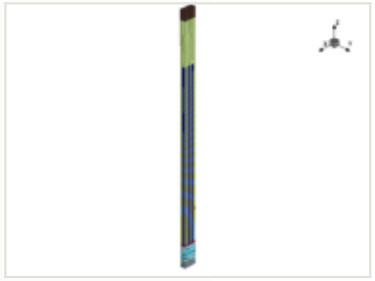

x cut at 0.000 µm

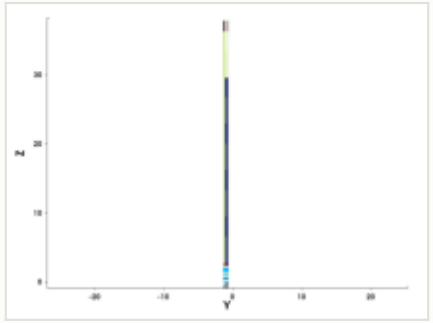

y cut at -1.035 µm

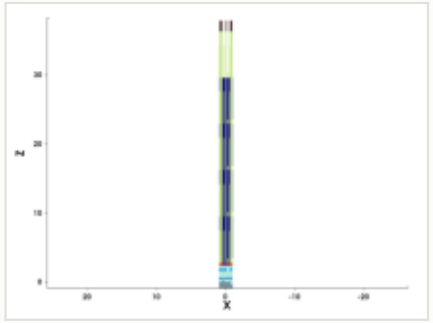

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

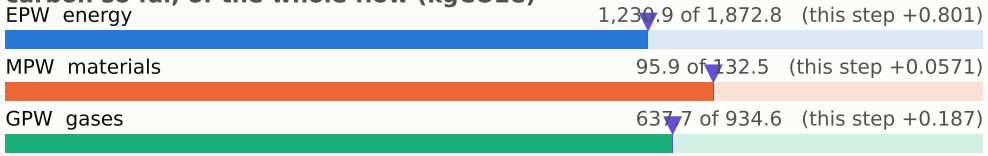

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

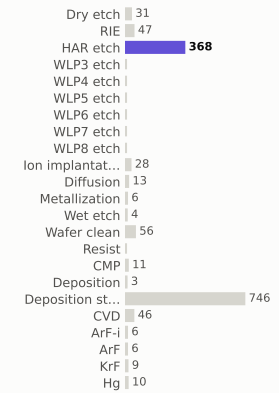

materials deposited (g)

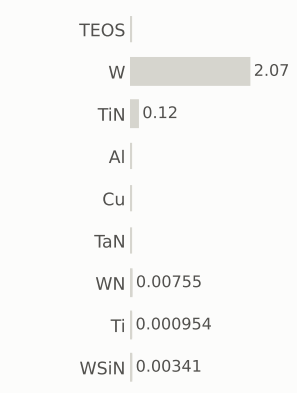

gases emitted (g)

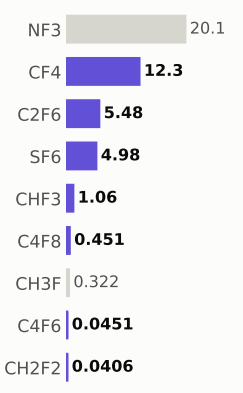

Step #17849.2617: HAR_etch

etch_noop · HAR_etch

1.04	1,965.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

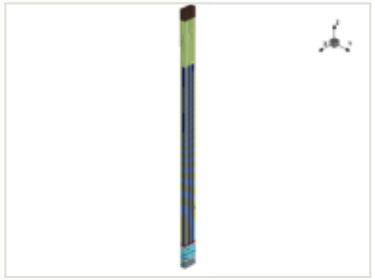

x cut at 0.000 µm

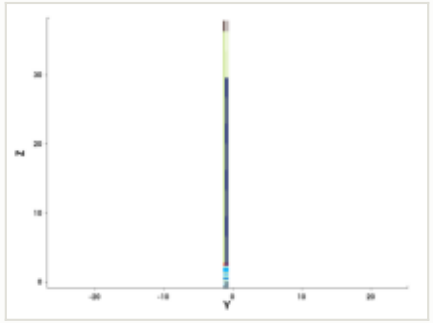

y cut at -1.035 µm

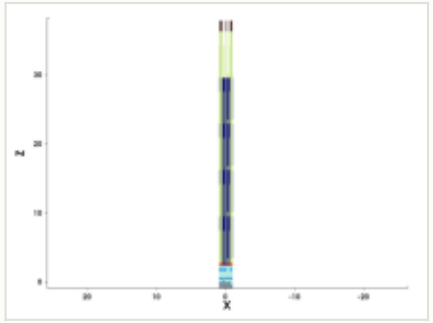

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

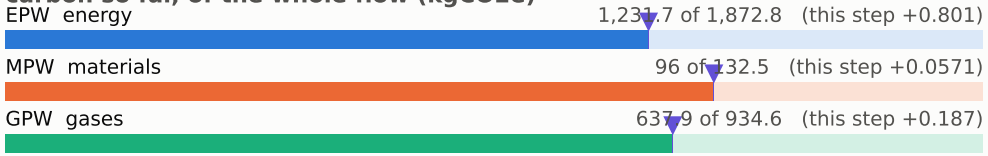

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

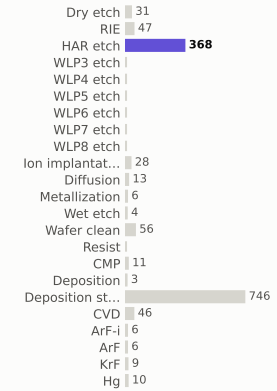

materials deposited (g)

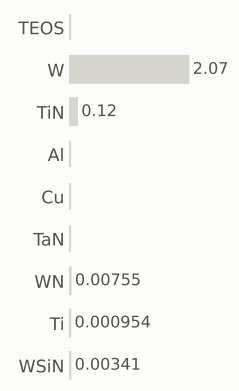

gases emitted (g)

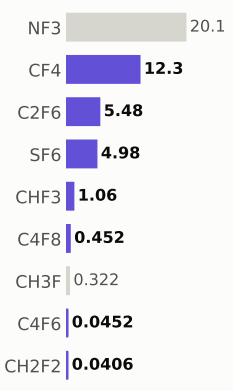

Step #17849.3289: HAR_etch

etch_noop · HAR_etch

1.04	1,966.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

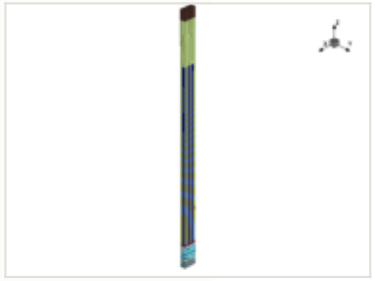

x cut at 0.000 µm

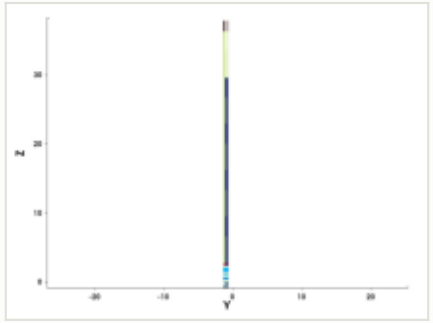

y cut at -1.035 µm

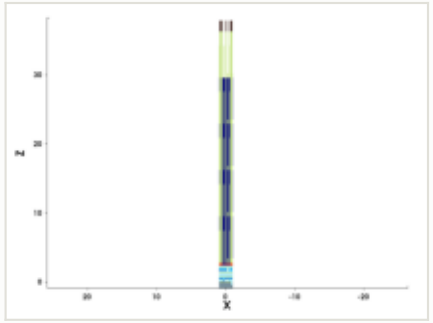

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

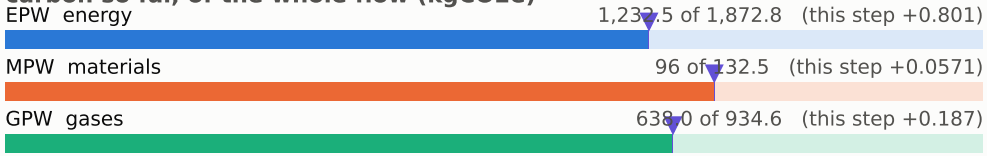

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

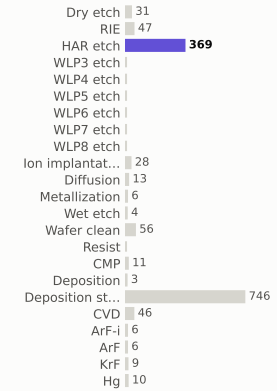

materials deposited (g)

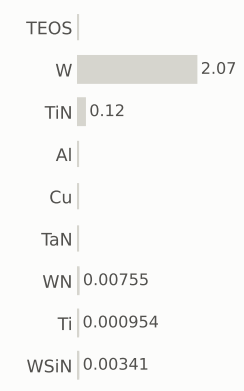

gases emitted (g)

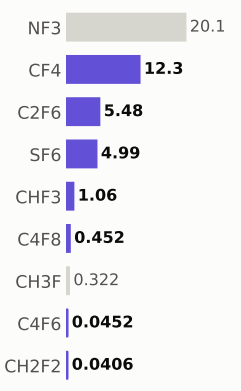

Step #17849.396: HAR_etch

etch_noop · HAR_etch

1.04	1,967.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

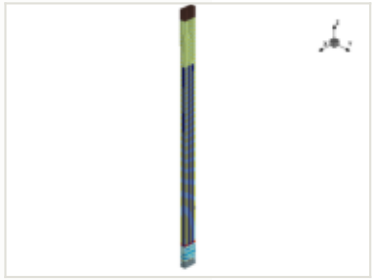



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

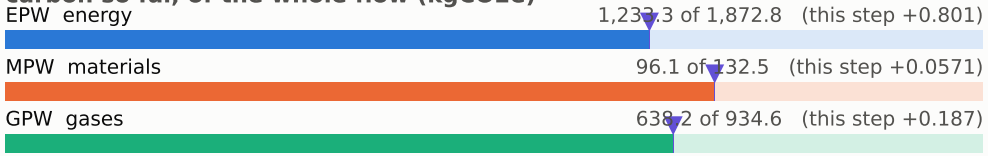

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

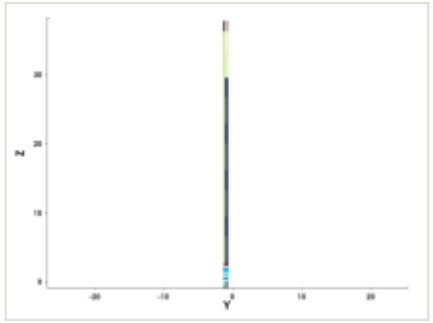

y cut at -1.035 µm

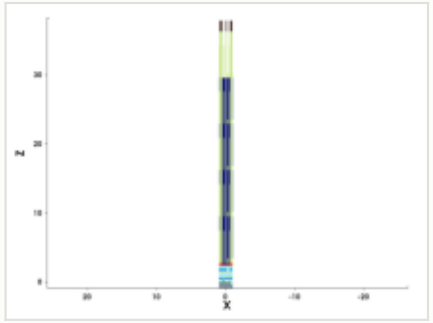

mask for this step

no mask for this step

steps by process area

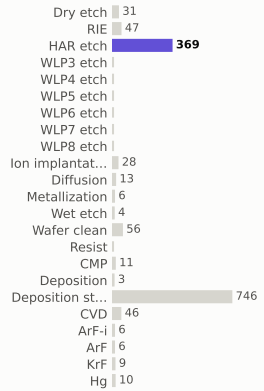

materials deposited (g)

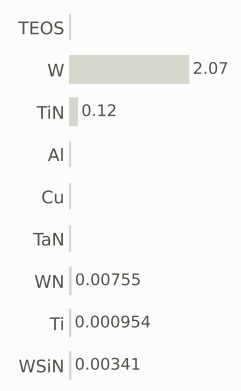

gases emitted (g)

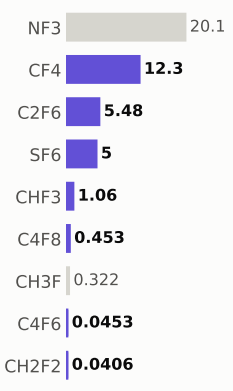

Step #17849.4631: HAR_etch

etch_noop · HAR_etch

1.04	1,968.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

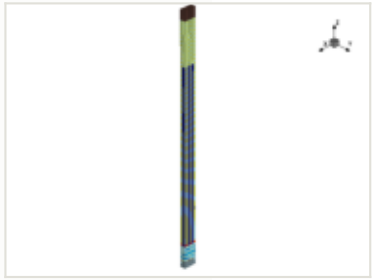

x cut at 0.000 µm

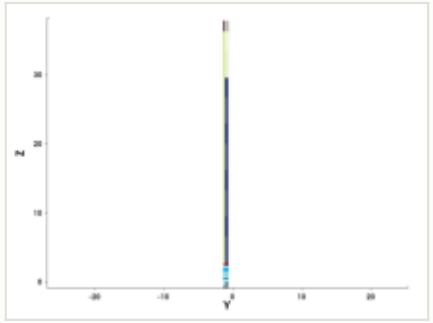

y cut at -1.035 µm

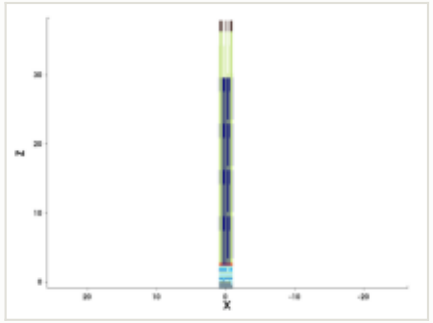

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

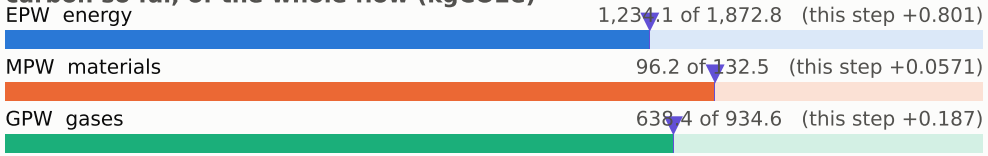

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

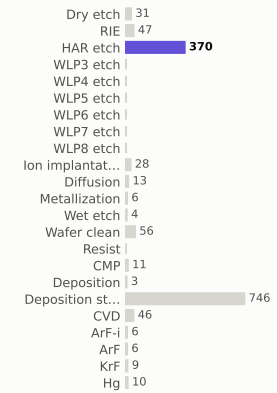

materials deposited (g)



gases emitted (g)

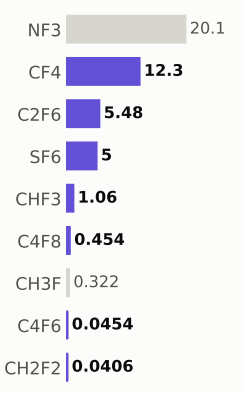

Step #17849.5302: HAR_etch

etch_noop · HAR_etch

1.04	1,969.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

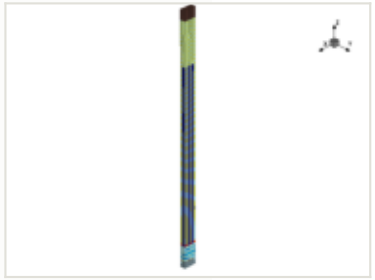

x cut at 0.000 µm

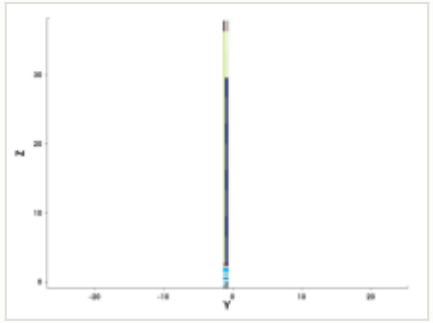

y cut at -1.035 µm

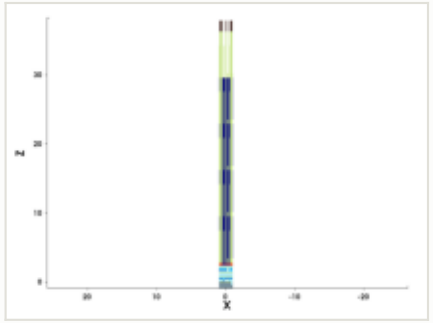

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

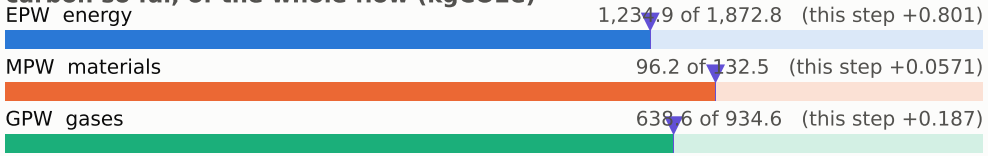

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

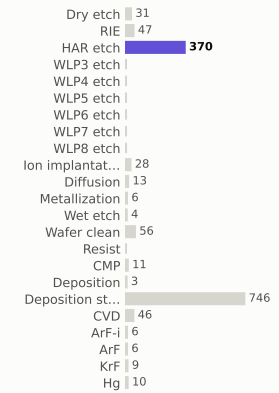

materials deposited (g)



gases emitted (g)

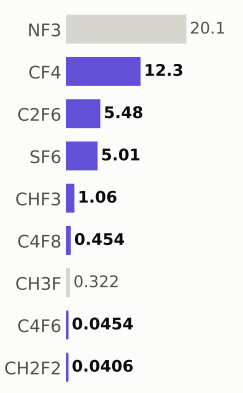

Step #17849.5973: HAR_etch

etch_noop · HAR_etch

1.04	1,970.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

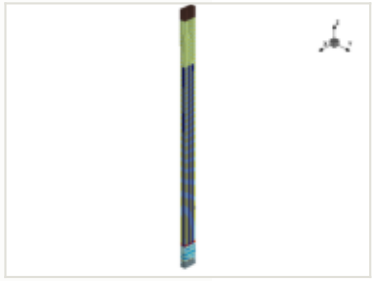

x cut at 0.000 µm

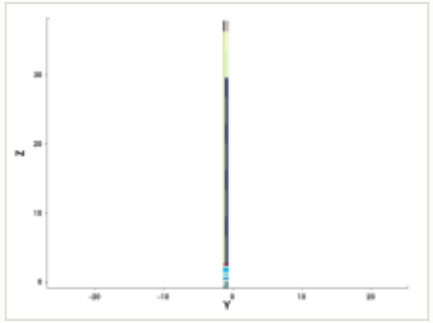

y cut at -1.035 µm

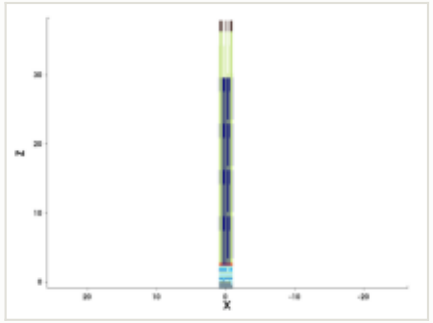

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

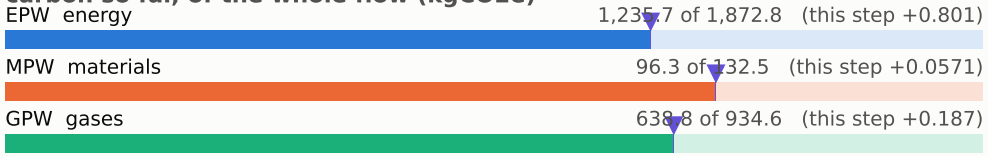

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

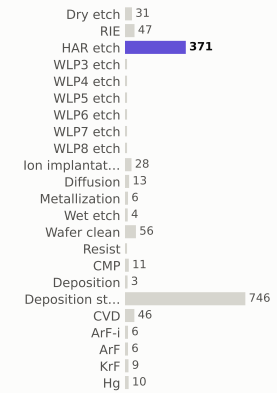

materials deposited (g)



gases emitted (g)

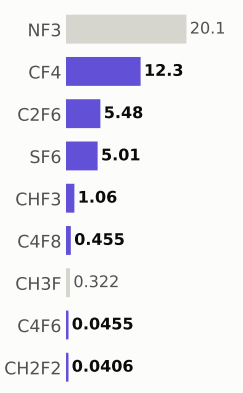

Step #17849.6644: HAR_etch

etch_noop · HAR_etch

1.04	1,971.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

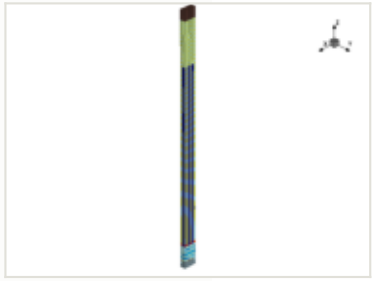

x cut at 0.000 µm

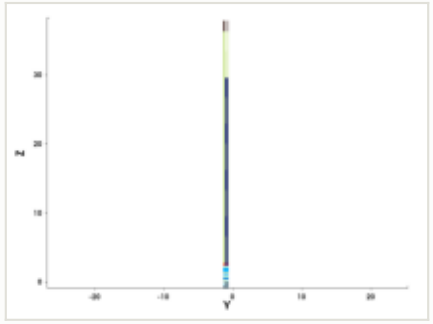

y cut at -1.035 µm

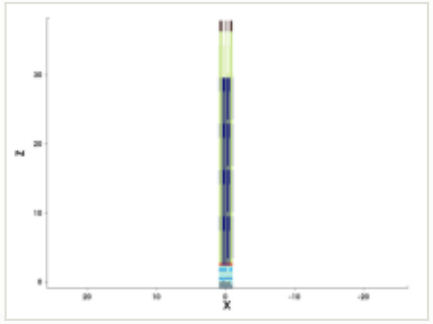

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

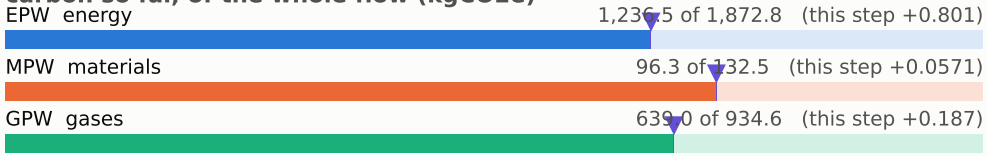

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

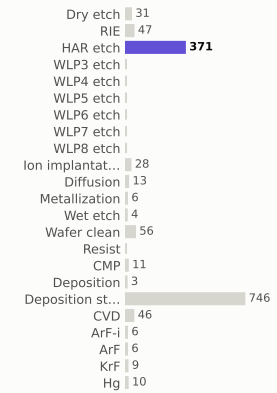

materials deposited (g)

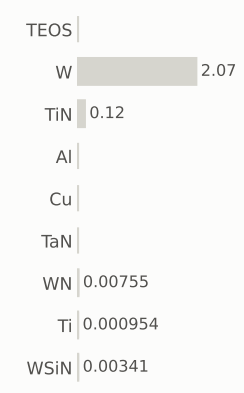

gases emitted (g)

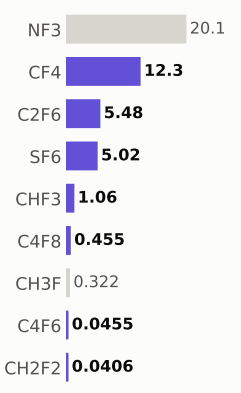

Step #17849.7315: HAR_etch

etch_noop · HAR_etch

1.04	1,972.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

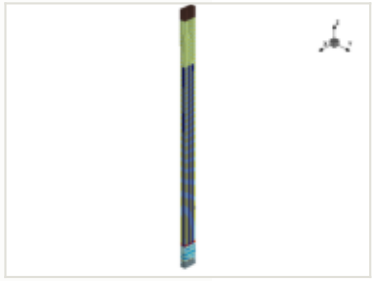

x cut at 0.000 µm

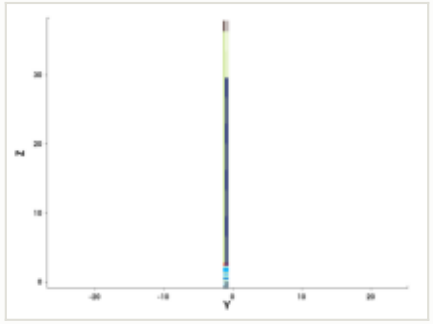

y cut at -1.035 µm

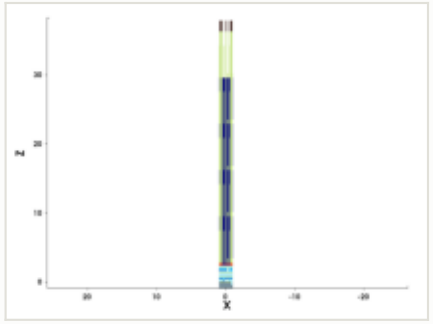

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

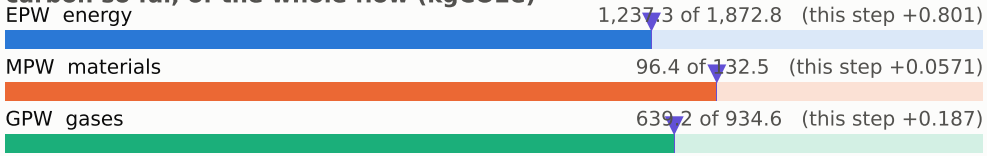

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

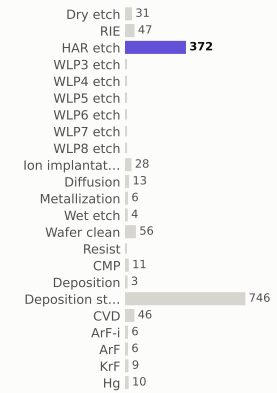

materials deposited (g)

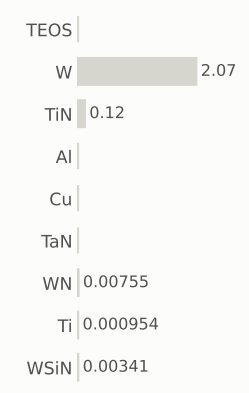

gases emitted (g)

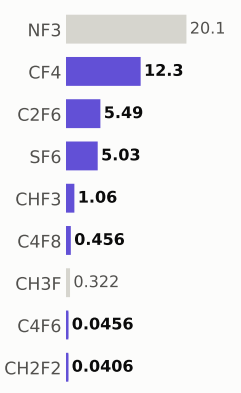

Step #17849.7987: HAR_etch

etch_noop · HAR_etch

1.04	1,973.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

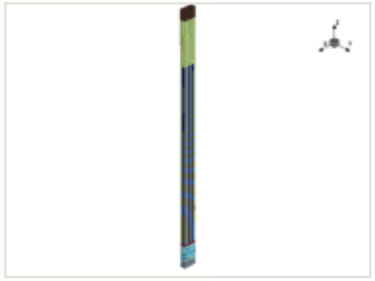

x cut at 0.000 µm

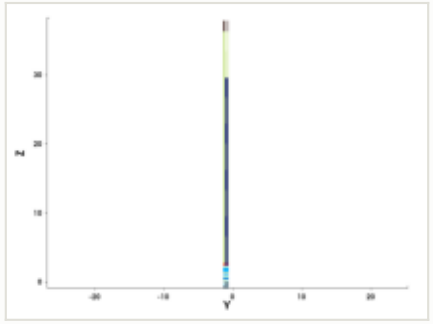

y cut at -1.035 µm

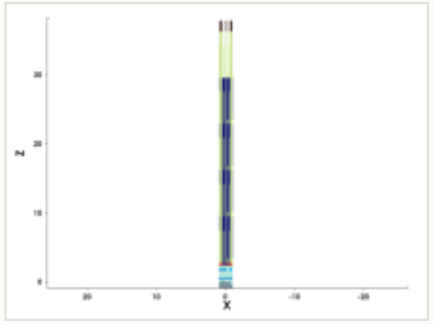

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

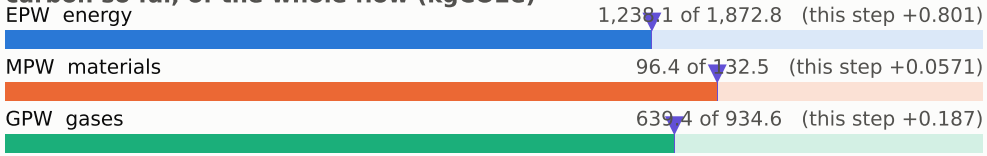

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

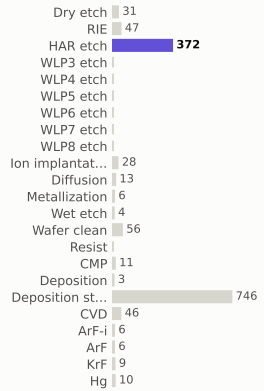

materials deposited (g)

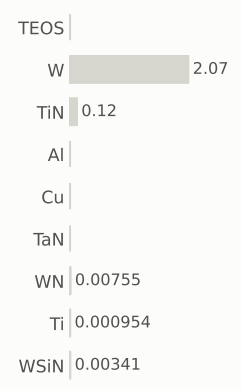

gases emitted (g)

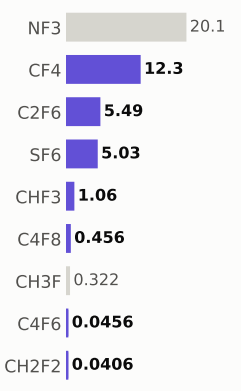

Step #17849.8658: HAR_etch

etch_noop · HAR_etch

1.04	1,974.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

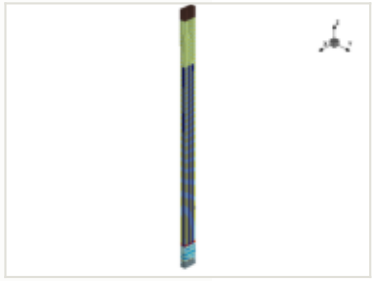



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

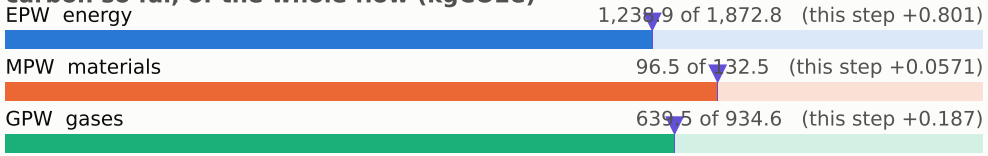

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

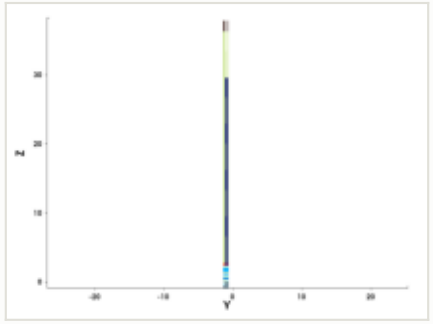

y cut at -1.035 µm

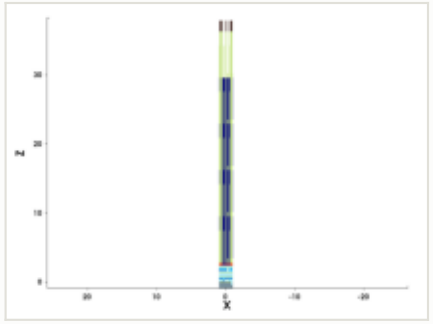

mask for this step

no mask for this step

steps by process area

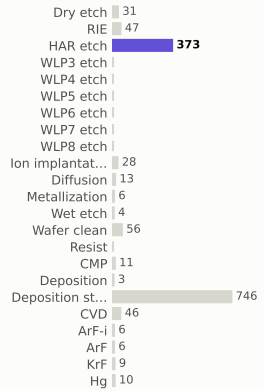

materials deposited (g)

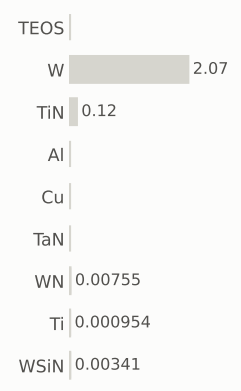

gases emitted (g)

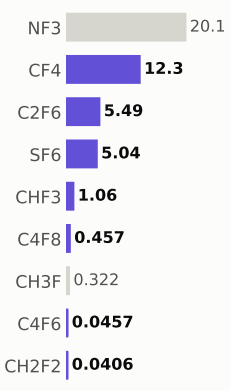

Step #17849.9329: HAR_etch

etch_noop · HAR_etch

1.04	1,976.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

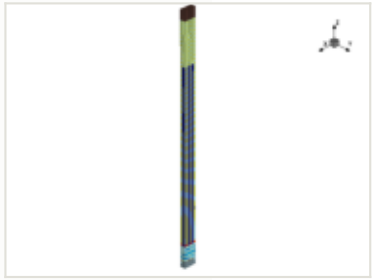



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

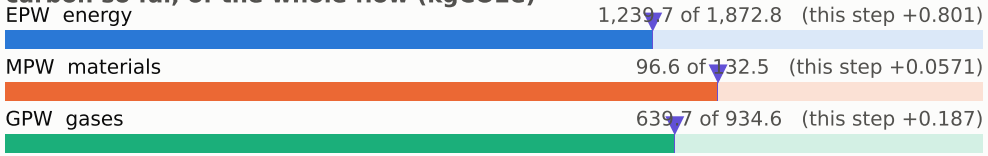

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

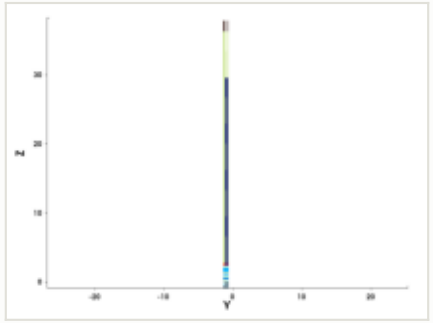

y cut at -1.035 µm

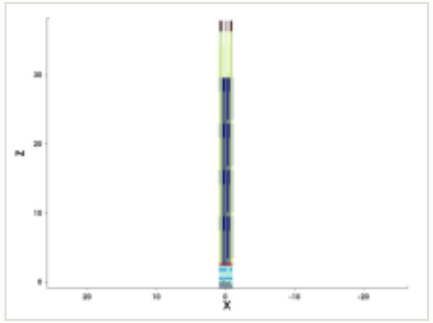

mask for this step

no mask for this step

steps by process area

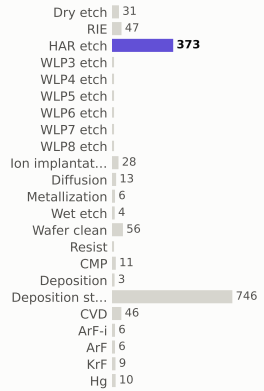

materials deposited (g)

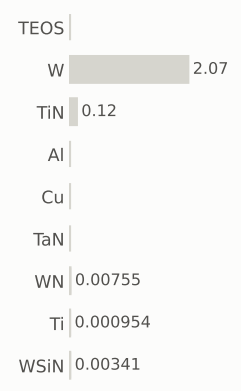

gases emitted (g)

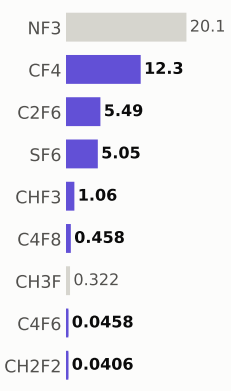

Step #17850: Dry_etch

etch_strip · Dry_etch

0.801	1,976.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

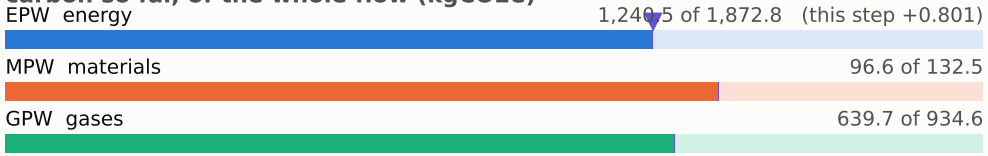

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

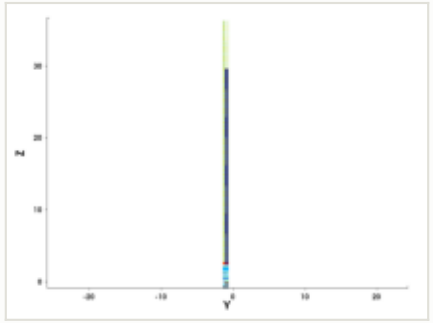

y cut at -1.035 µm

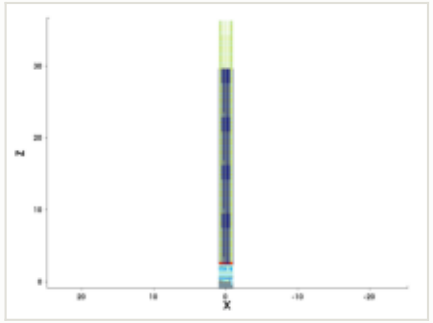

mask for this step

no mask for this step

steps by process area

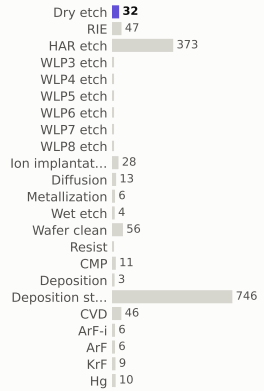

materials deposited (g)

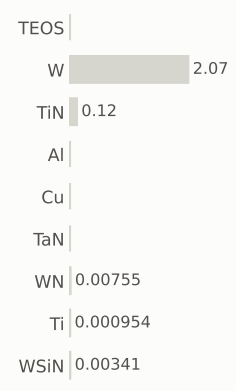

gases emitted (g)

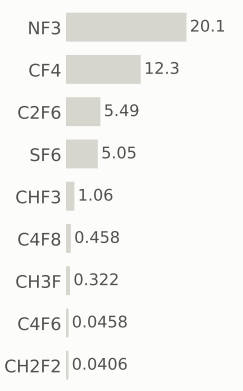

Step #17860: Wafer_clean

clean · Wafer_clean

0.169	1,977.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

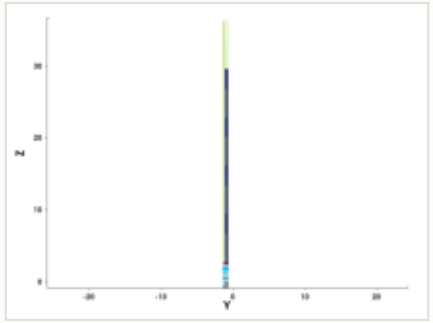

y cut at -1.035 µm

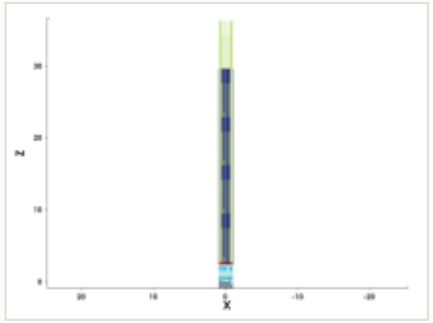

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

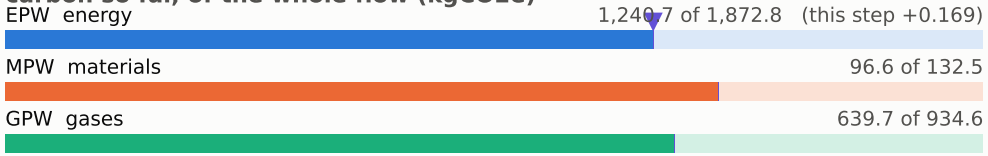

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

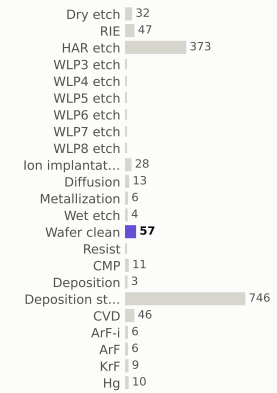

materials deposited (g)

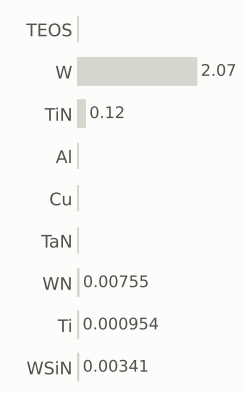

gases emitted (g)

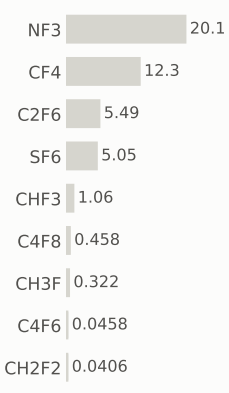

Step #17870: CVD

depo_isotropic · CVD

1.31	1,978.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

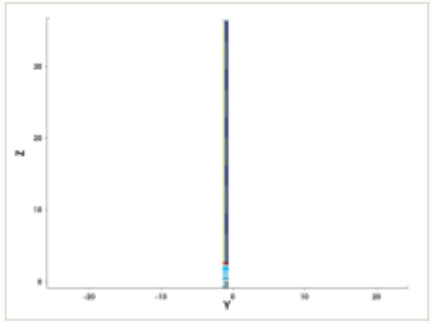

y cut at -1.035 µm

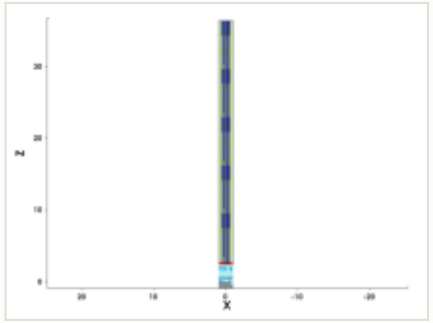

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.07 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0329 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

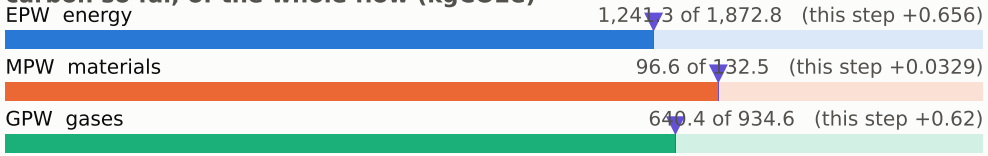

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

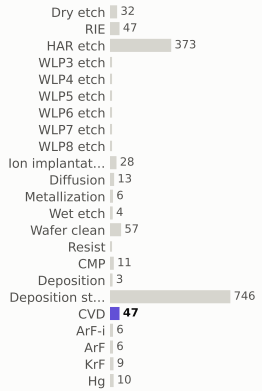

materials deposited (g)

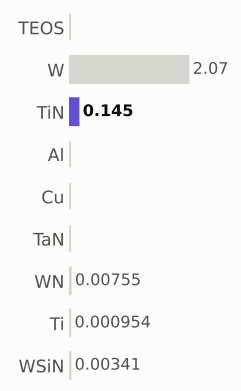

gases emitted (g)

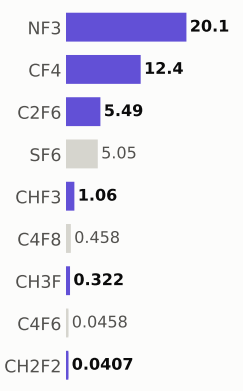

Step #17880: CMP

etch_cmp · CMP

0.169	1,978.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

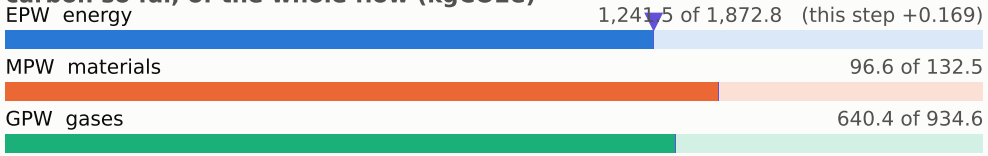

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

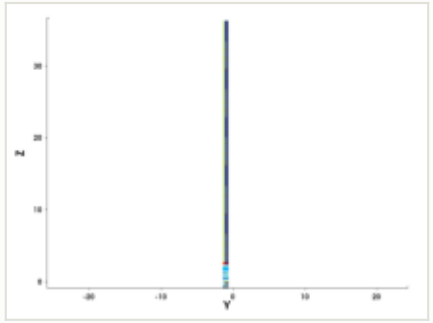

y cut at -1.035 µm

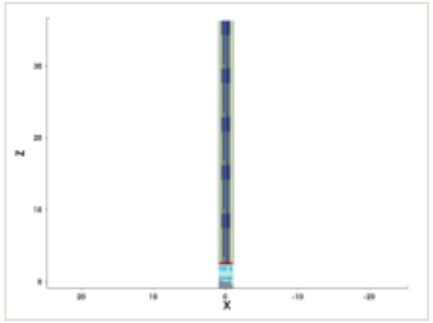

mask for this step

no mask for this step

steps by process area

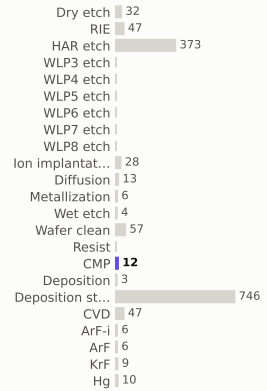

materials deposited (g)

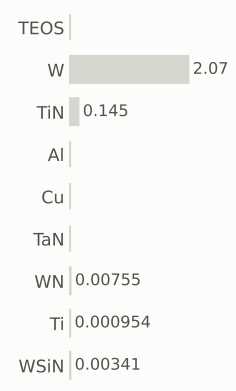

gases emitted (g)

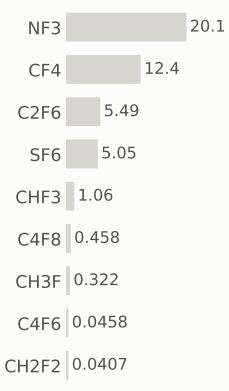

Step #17890: Wafer_clean

clean · Wafer_clean

0.169	1,978.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

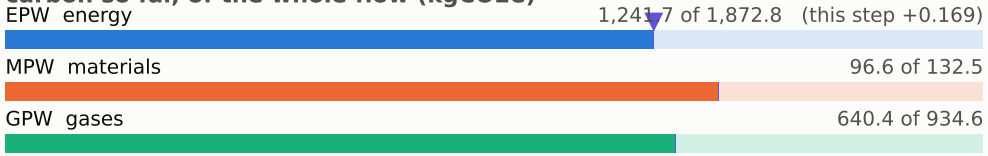

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

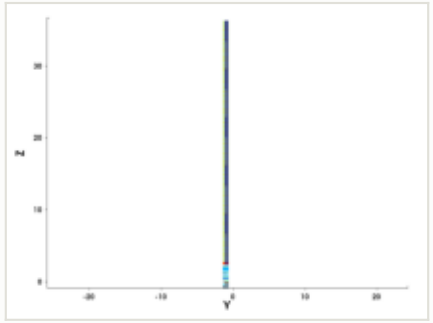

y cut at -1.035 µm

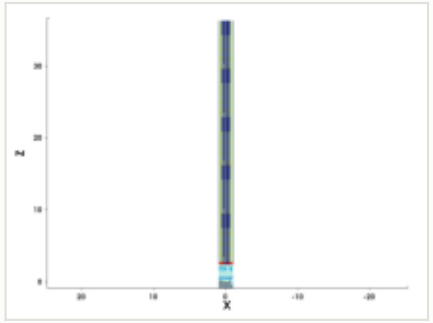

mask for this step

no mask for this step

steps by process area

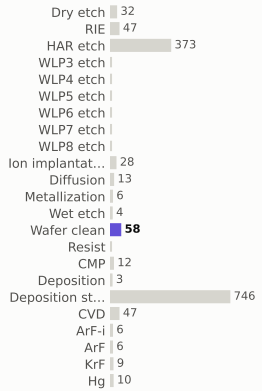

materials deposited (g)

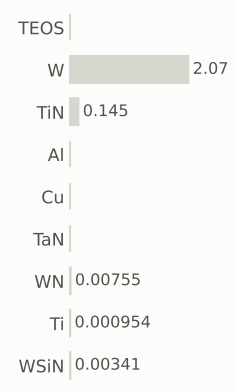

gases emitted (g)

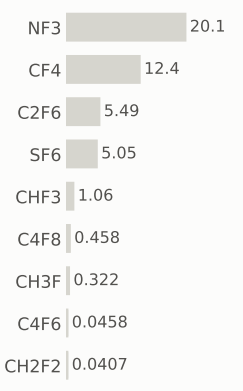

Step #17900: Wafer_clean

clean · Wafer_clean

0.169	1,978.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

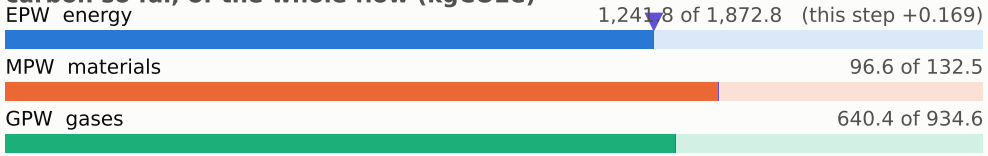

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

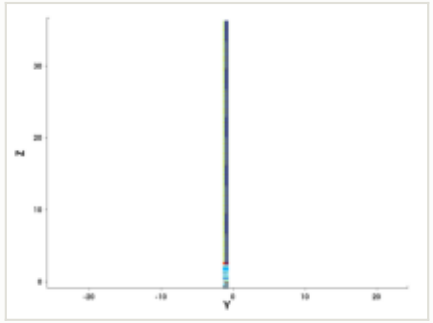

y cut at -1.035 µm

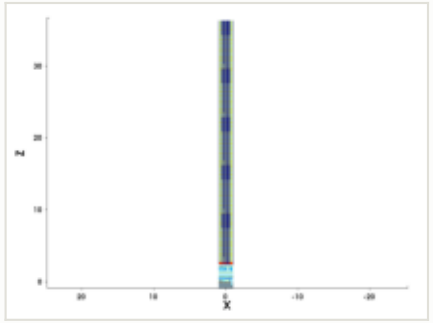

mask for this step

no mask for this step

steps by process area

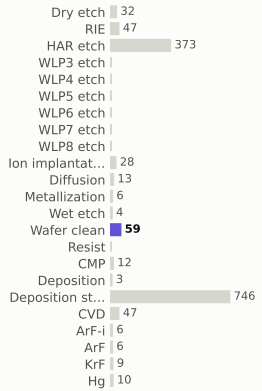

materials deposited (g)

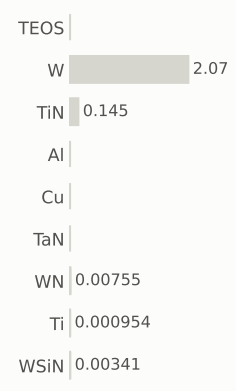

gases emitted (g)

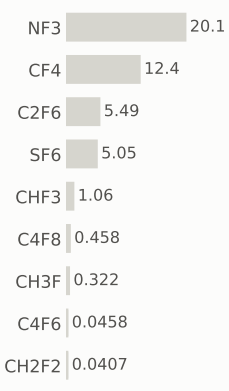

Step #17910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,979.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

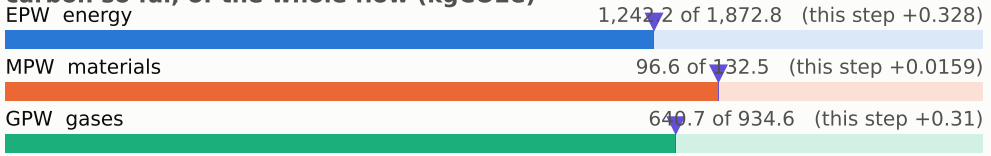

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

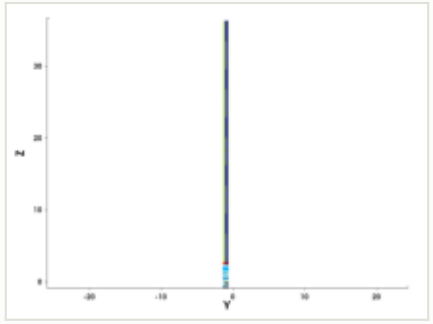

y cut at -1.035 µm

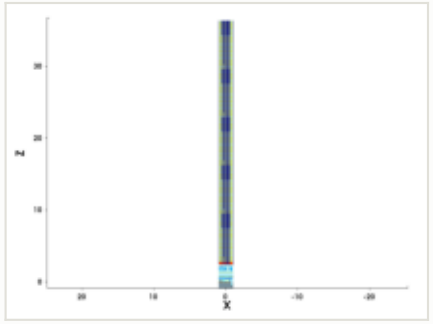

mask for this step

no mask for this step

steps by process area

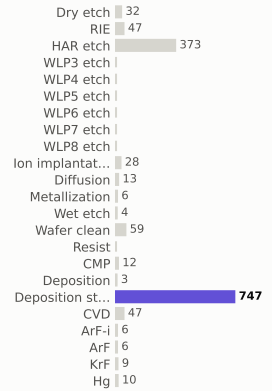

materials deposited (g)

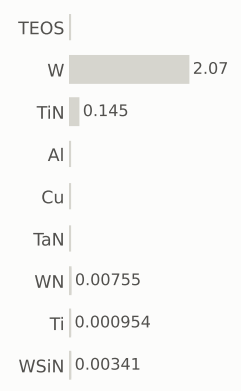

gases emitted (g)

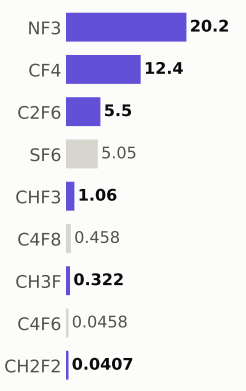

Step #17920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,980.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

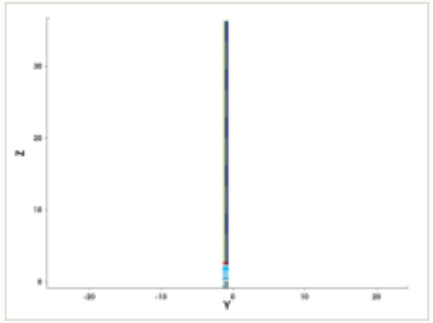

y cut at -1.035 µm

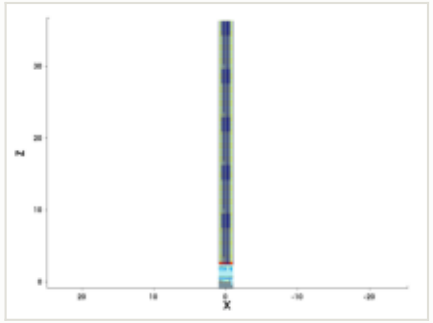

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

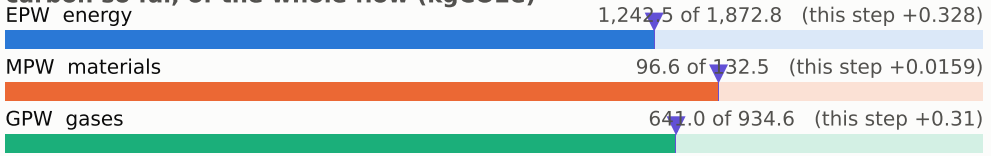

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

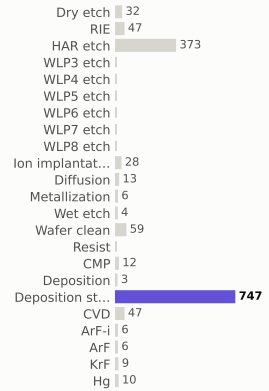

materials deposited (g)

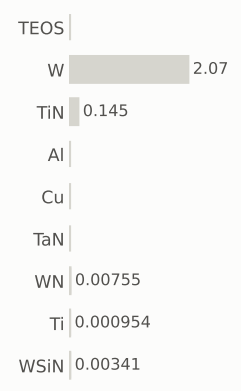

gases emitted (g)

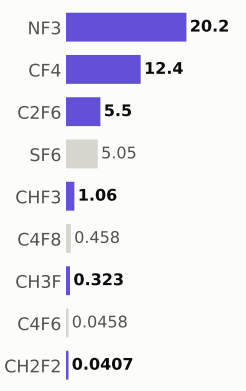

Step #17930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,980.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

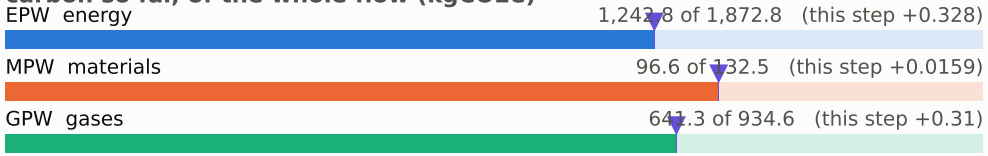

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

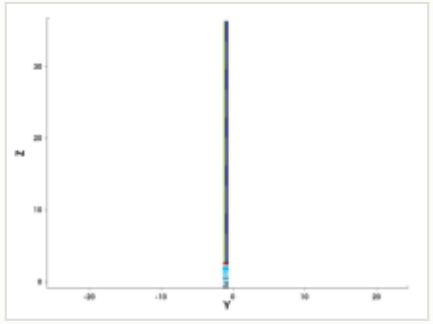

y cut at -1.035 µm

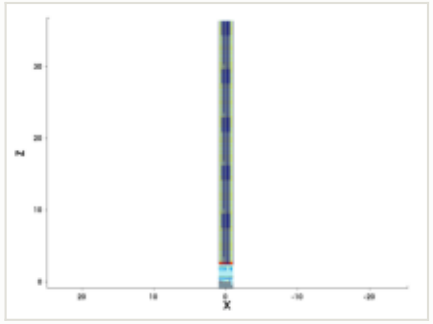

mask for this step

no mask for this step

steps by process area

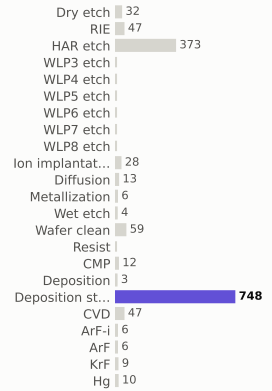

materials deposited (g)

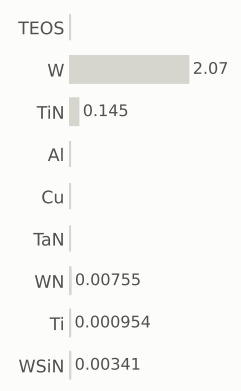

gases emitted (g)

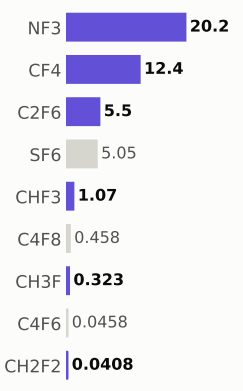

Step #17940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,981.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

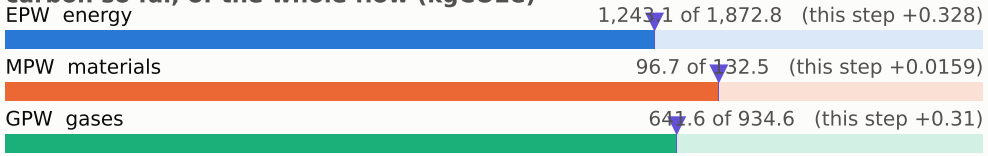

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

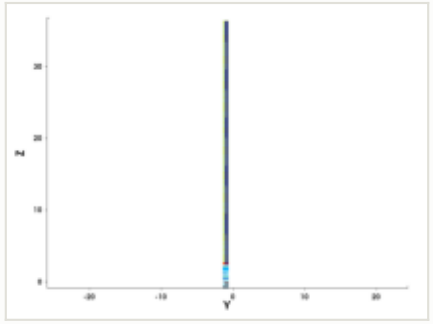

y cut at -1.035 µm

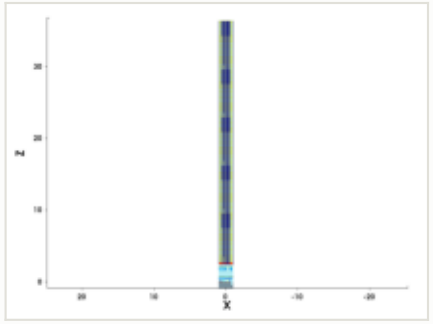

mask for this step

no mask for this step

steps by process area

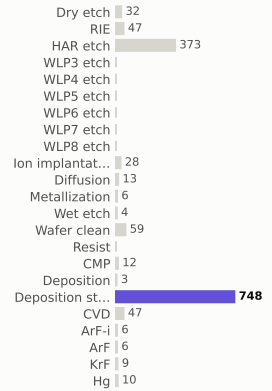

materials deposited (g)

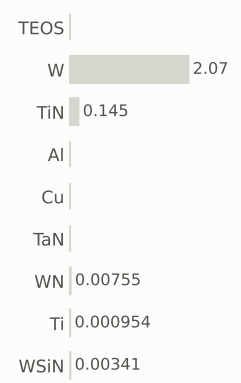

gases emitted (g)

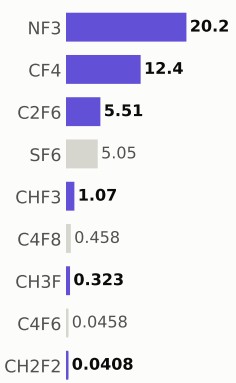

Step #17950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,982.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

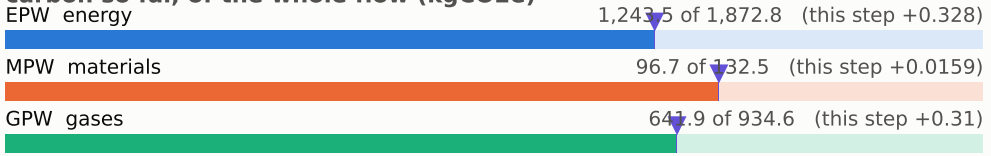

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

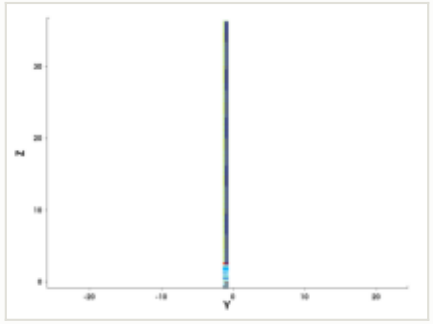

y cut at -1.035 µm

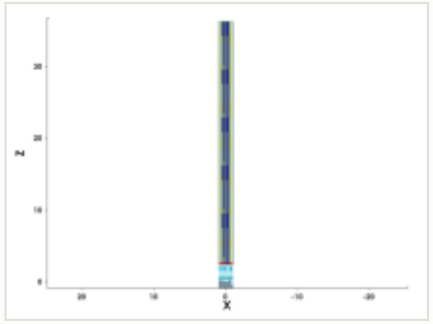

mask for this step

no mask for this step

steps by process area

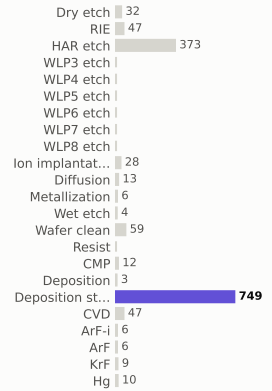

materials deposited (g)

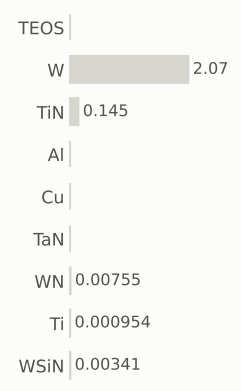

gases emitted (g)

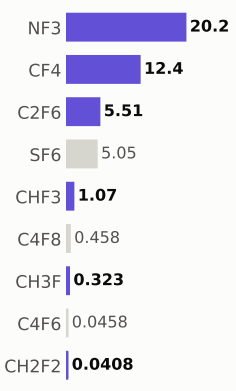

Step #17960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,982.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

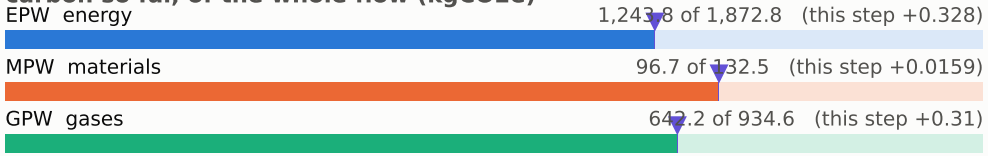

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

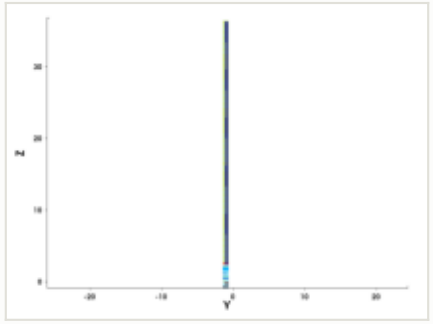

y cut at -1.035 µm

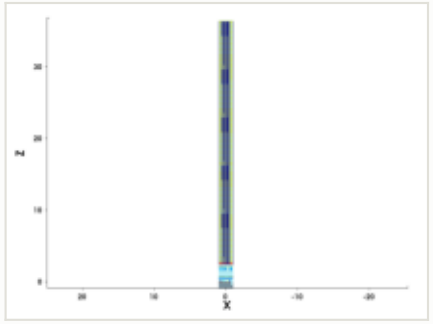

mask for this step

no mask for this step

steps by process area

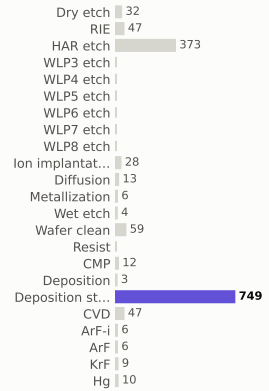

materials deposited (g)

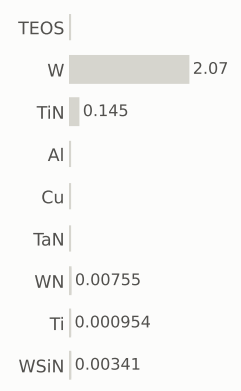

gases emitted (g)

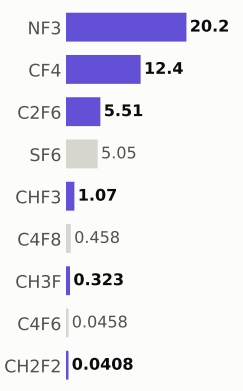

Step #17970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,983.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

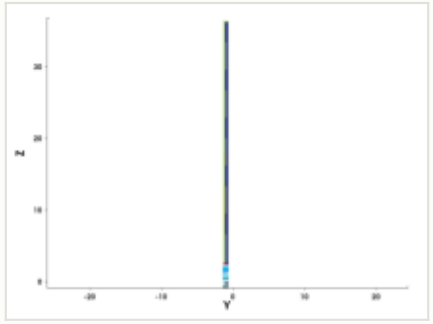

y cut at -1.035 µm

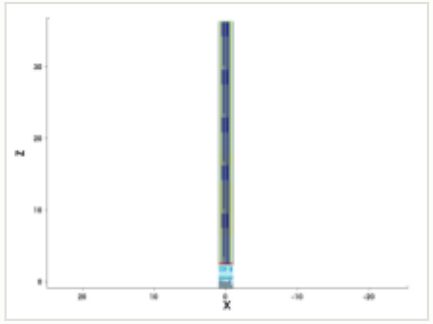

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

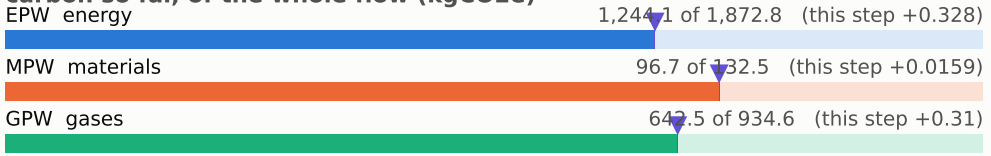

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

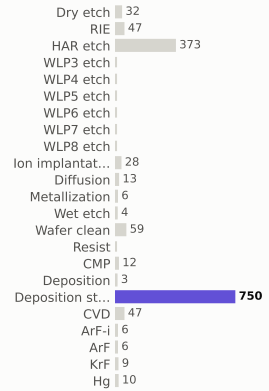

materials deposited (g)

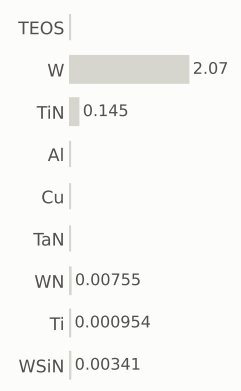

gases emitted (g)

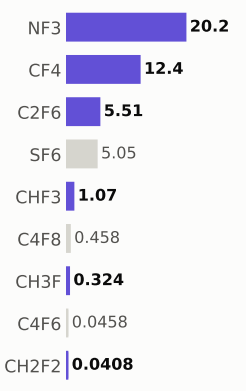

Step #17980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,984.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

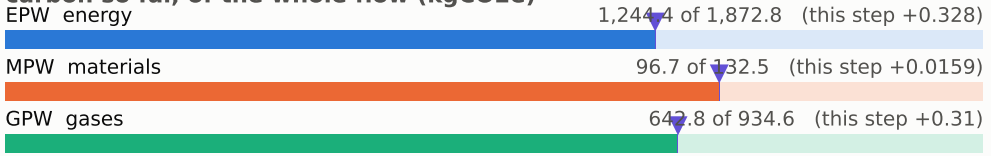

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

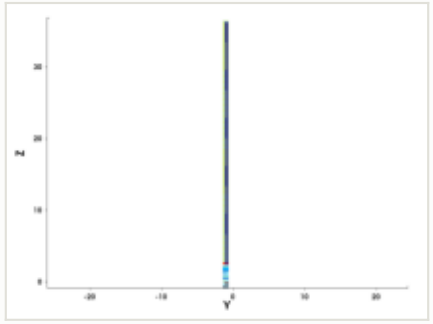

y cut at -1.035 µm

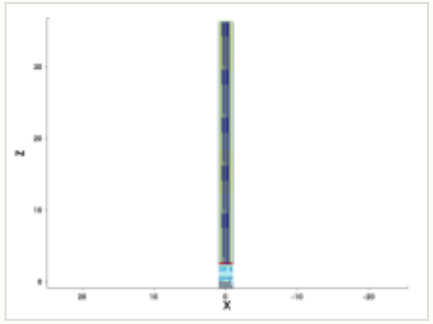

mask for this step

no mask for this step

steps by process area

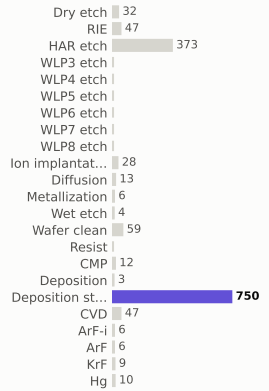

materials deposited (g)

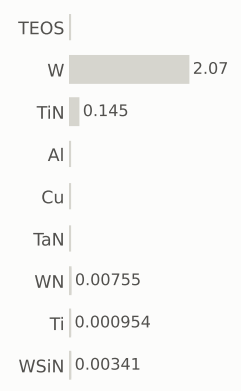

gases emitted (g)

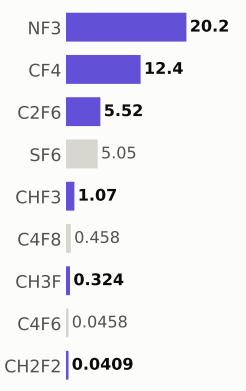

Step #17990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,984.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

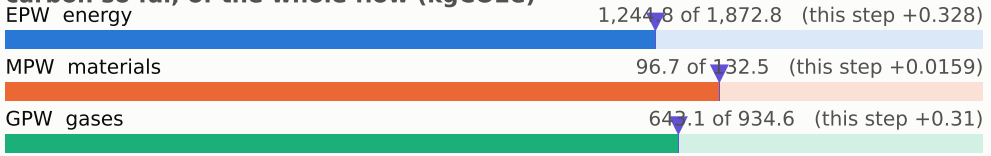

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

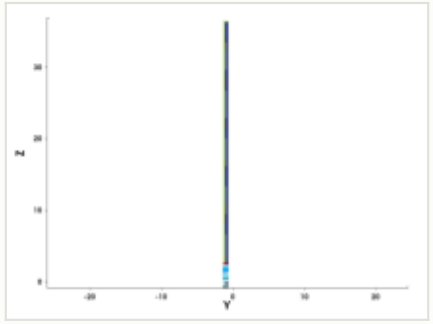

y cut at -1.035 µm

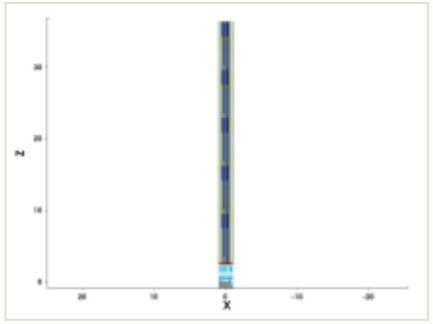

mask for this step

no mask for this step

steps by process area

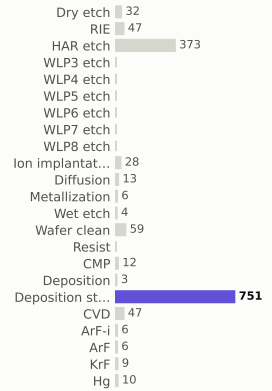

materials deposited (g)

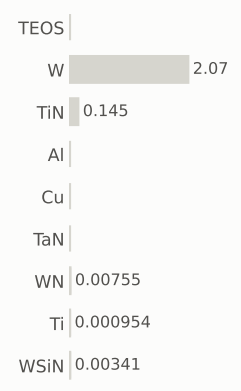

gases emitted (g)

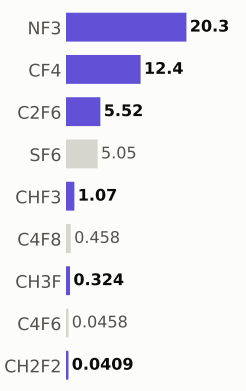

Step #18000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,985.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

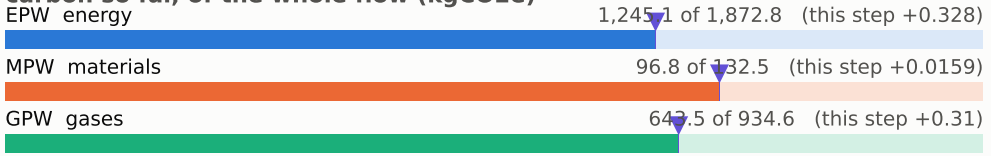

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

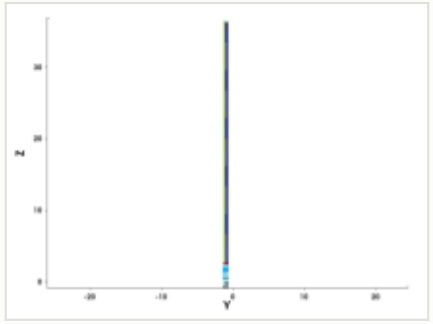

y cut at -1.035 µm

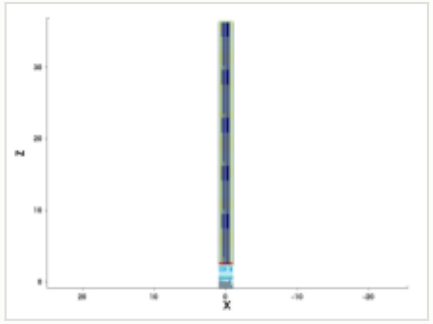

mask for this step

no mask for this step

steps by process area

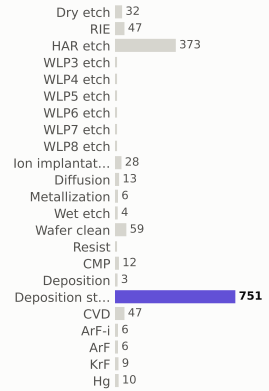

materials deposited (g)

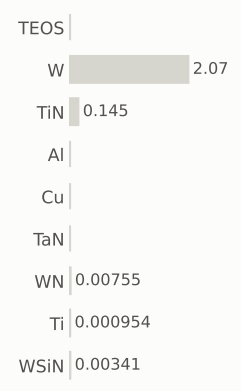

gases emitted (g)

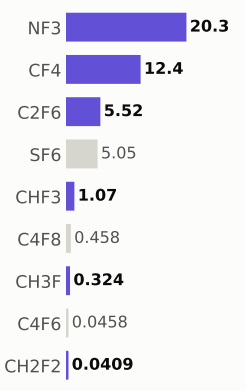

Step #18010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,986.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

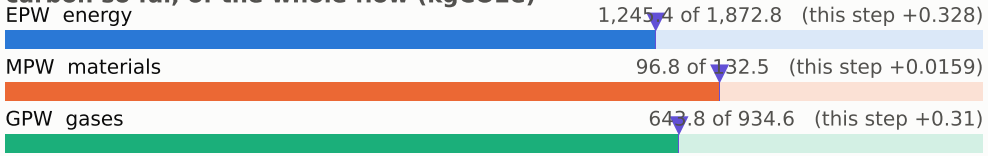

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

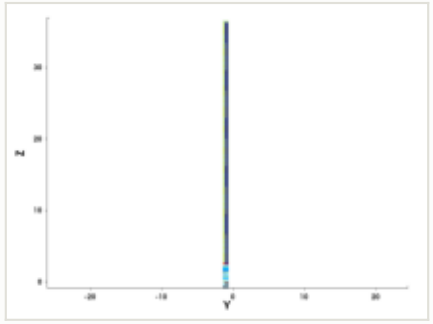

y cut at -1.035 µm

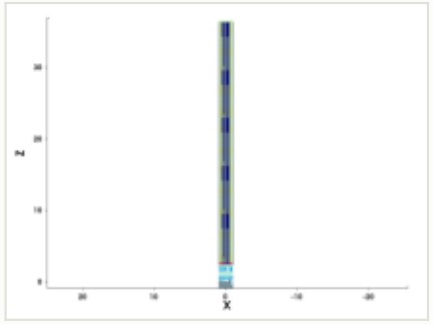

mask for this step

no mask for this step

steps by process area

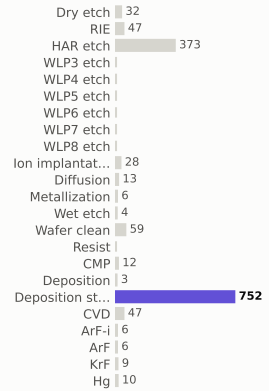

materials deposited (g)

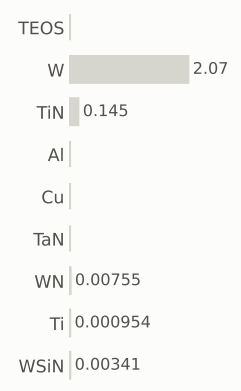

gases emitted (g)

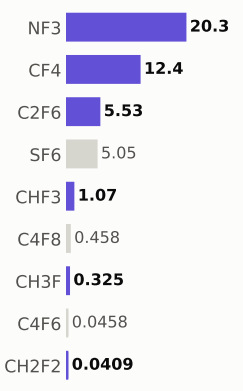

Step #18020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,986.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

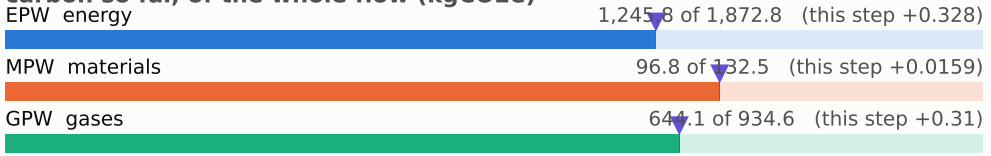

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

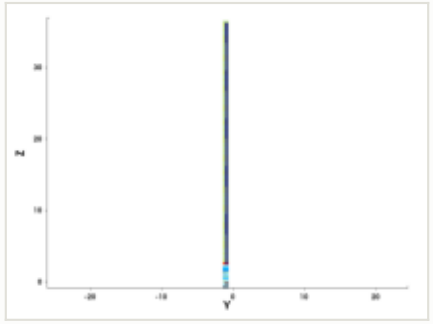

y cut at -1.035 µm

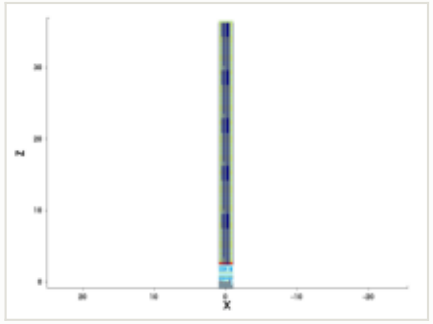

mask for this step

no mask for this step

steps by process area

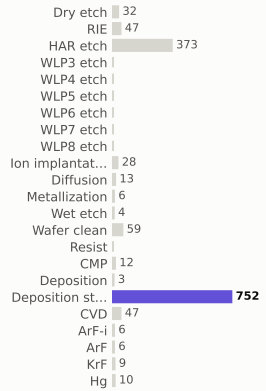

materials deposited (g)

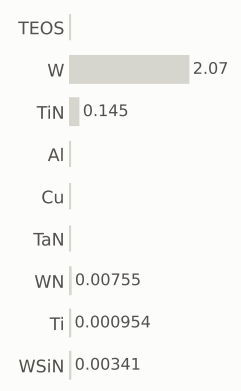

gases emitted (g)

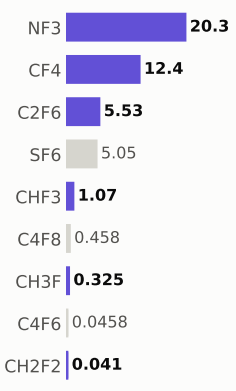

Step #18030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,987.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

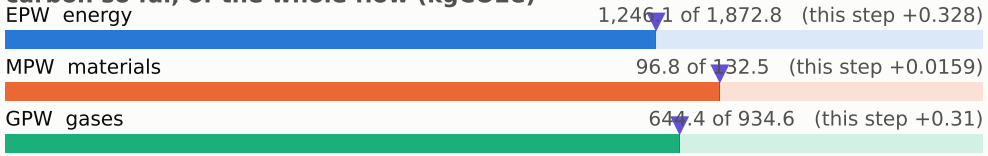

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

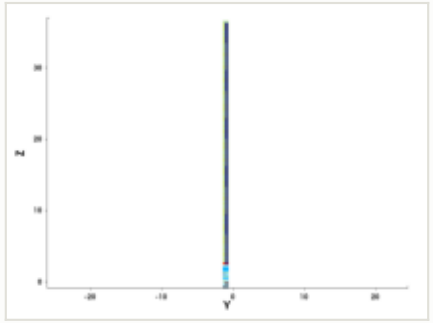

y cut at -1.035 µm

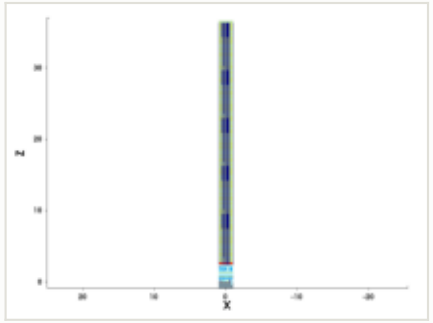

mask for this step

no mask for this step

steps by process area

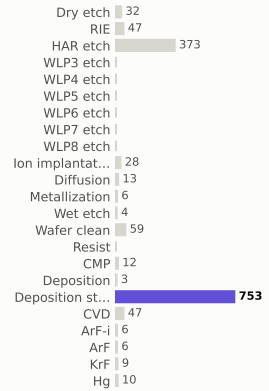

materials deposited (g)

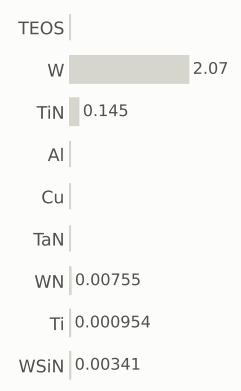

gases emitted (g)

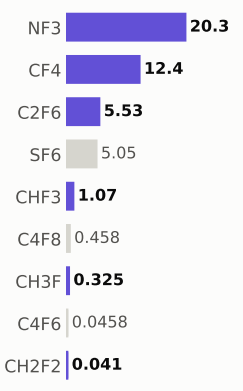

Step #18040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,987.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

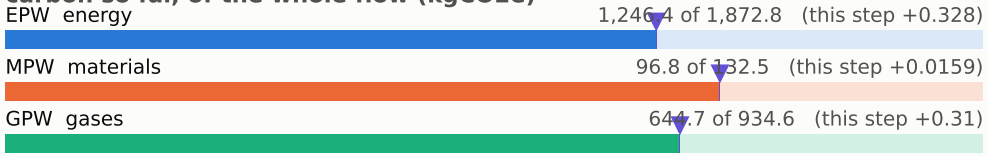

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

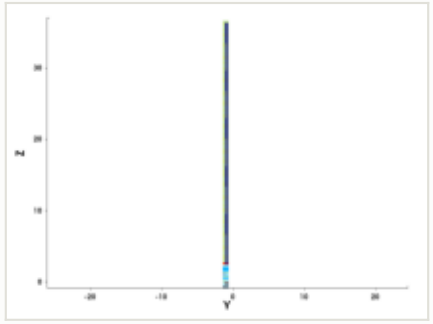

y cut at -1.035 µm

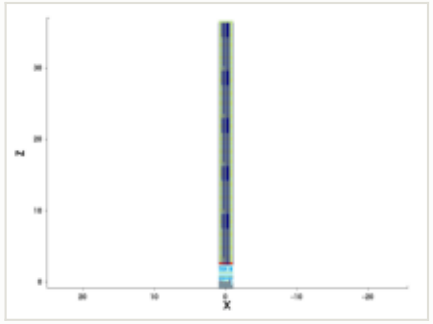

mask for this step

no mask for this step

steps by process area

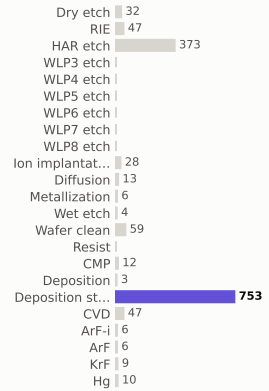

materials deposited (g)

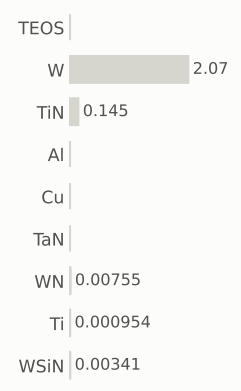

gases emitted (g)

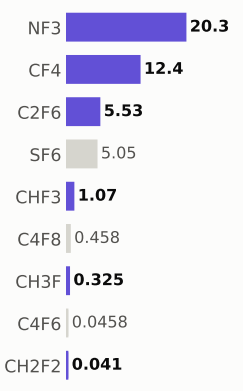

Step #18050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,988.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

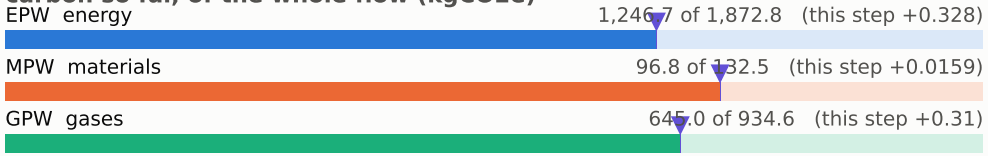

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

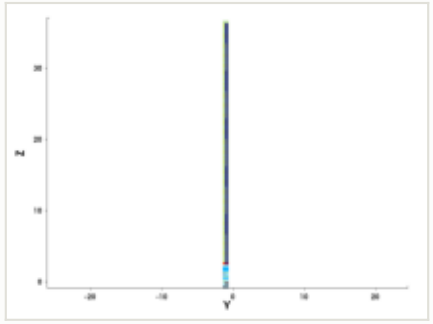

y cut at -1.035 µm

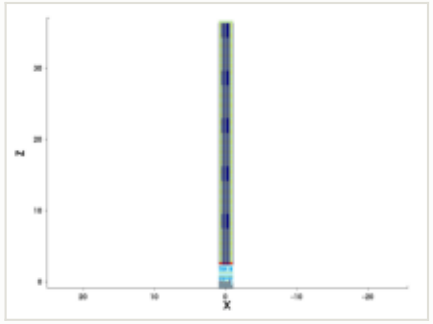

mask for this step

no mask for this step

steps by process area

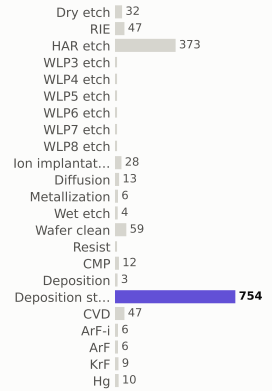

materials deposited (g)

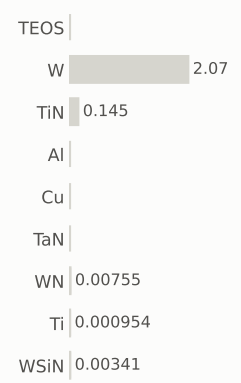

gases emitted (g)

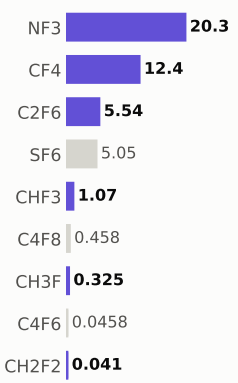

Step #18060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,989.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

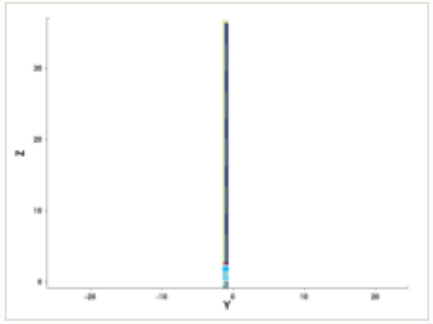

y cut at -1.035 µm

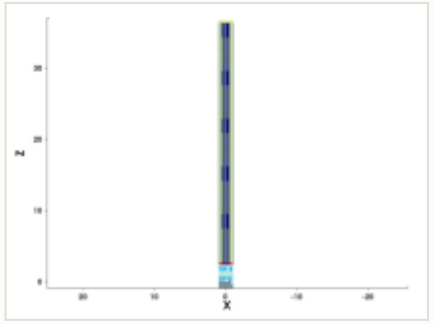

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

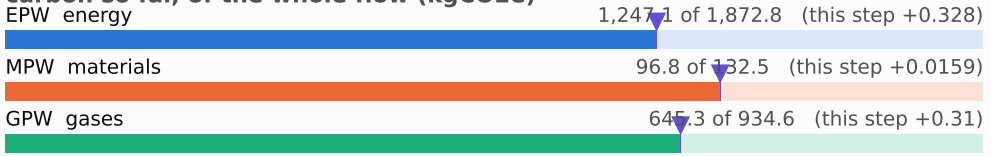

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

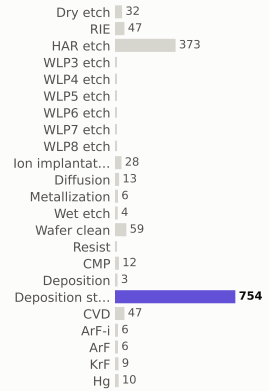

materials deposited (g)

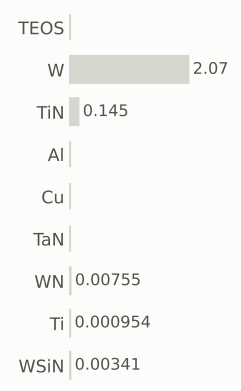

gases emitted (g)

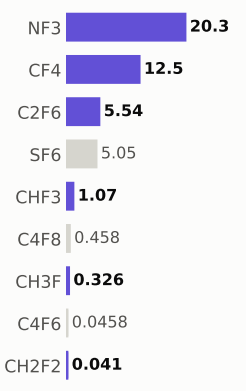

Step #18070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,989.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

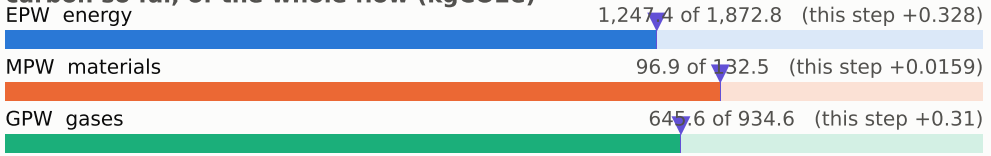

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

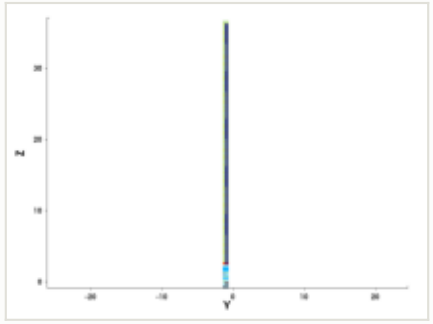

y cut at -1.035 µm

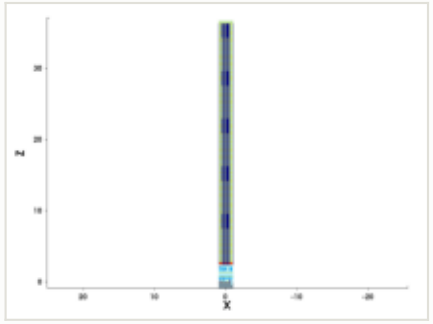

mask for this step

no mask for this step

steps by process area

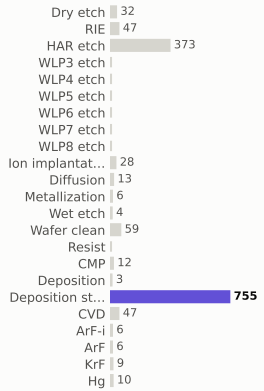

materials deposited (g)

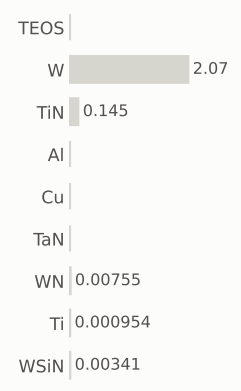

gases emitted (g)

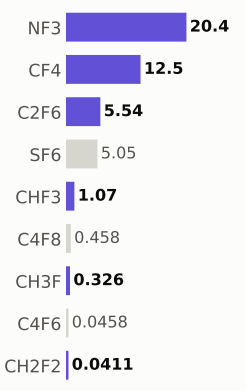

Step #18080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,990.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

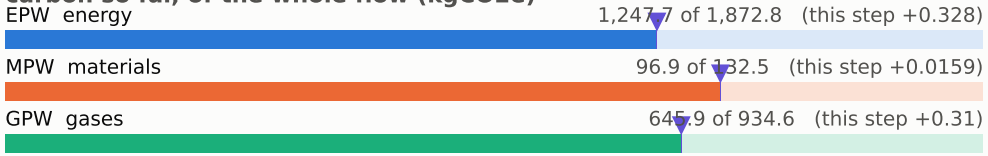

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

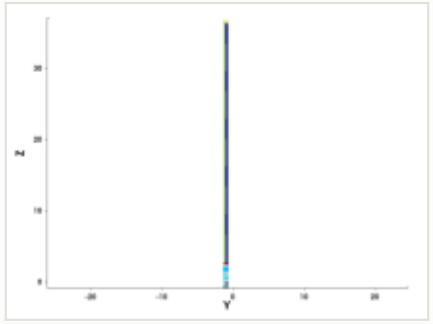

y cut at -1.035 µm

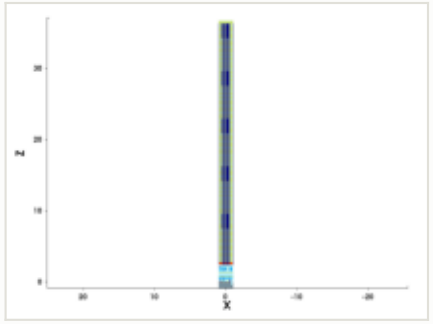

mask for this step

no mask for this step

steps by process area

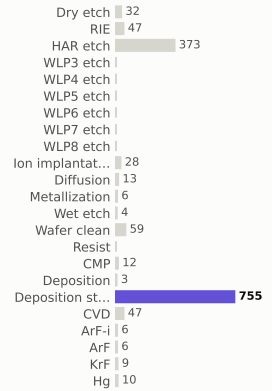

materials deposited (g)

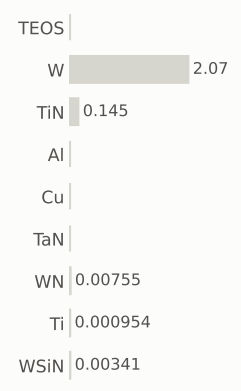

gases emitted (g)

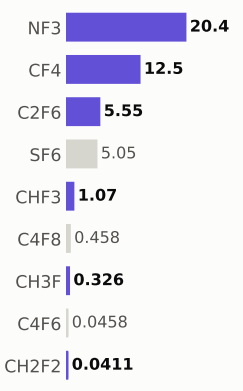

Step #18090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,991.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

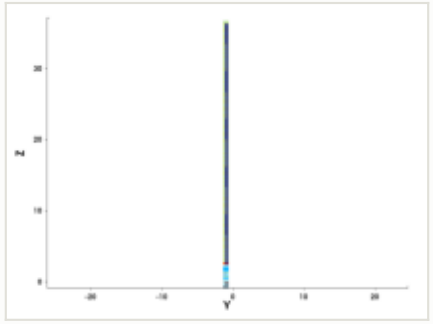

y cut at -1.035 µm

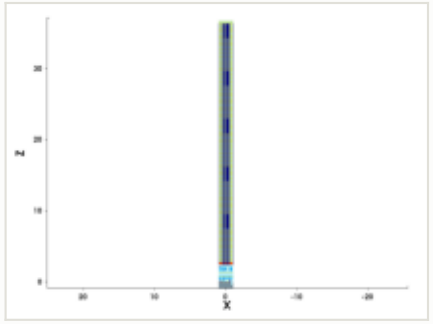

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

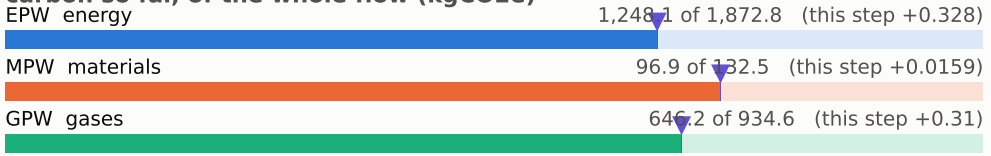

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

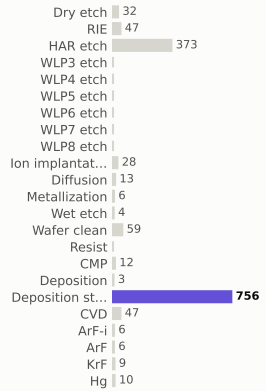

materials deposited (g)

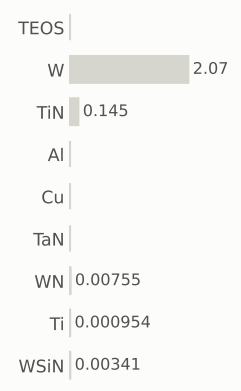

gases emitted (g)

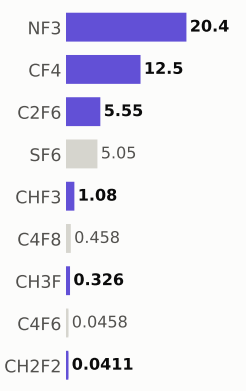

Step #18100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,991.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

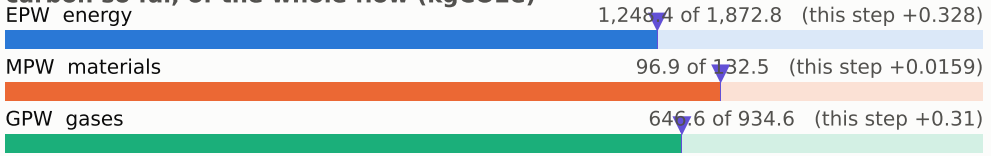

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

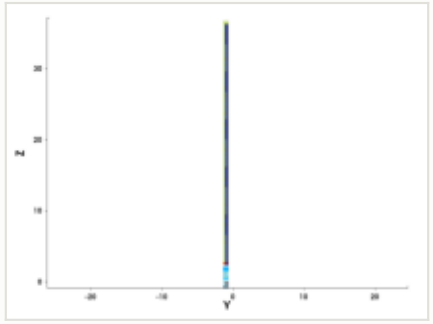

y cut at -1.035 µm

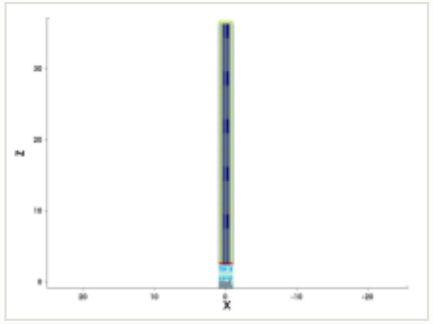

mask for this step

no mask for this step

steps by process area

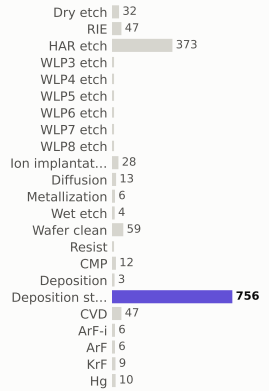

materials deposited (g)

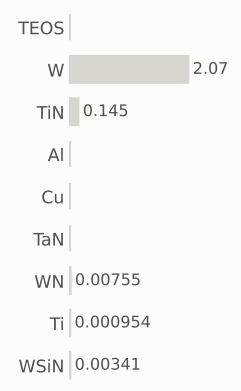

gases emitted (g)

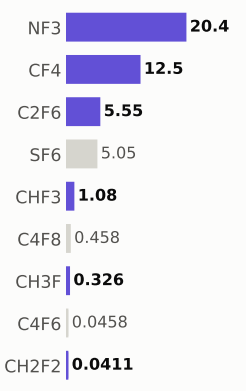

Step #18110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,992.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

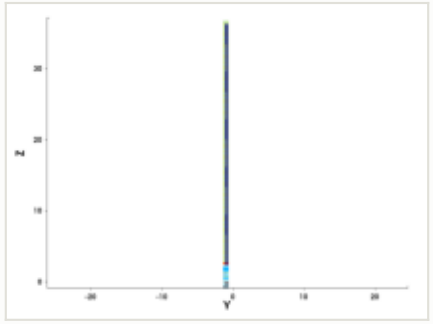

y cut at -1.035 µm

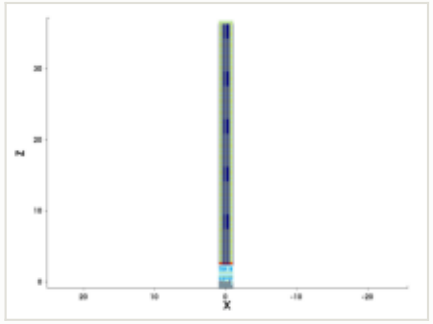

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

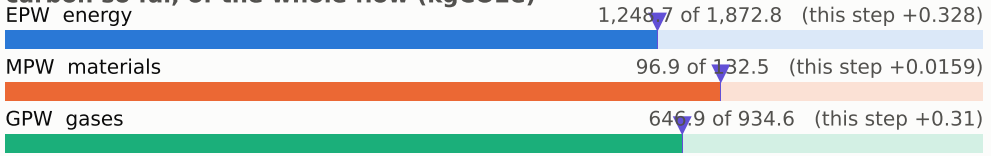

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

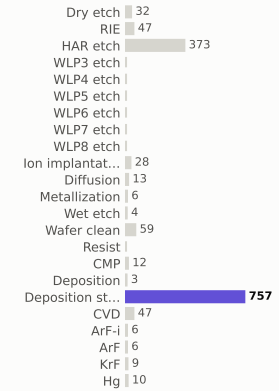

materials deposited (g)

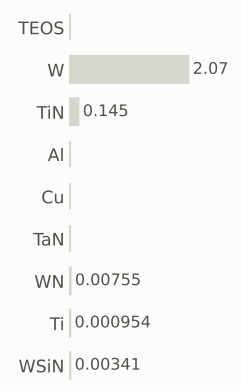

gases emitted (g)

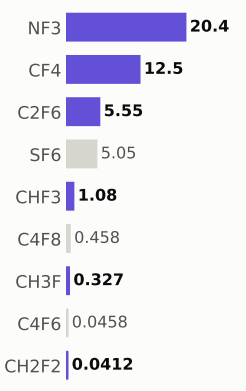

Step #18120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,993.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

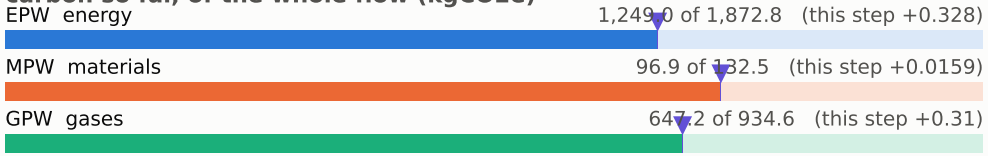

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

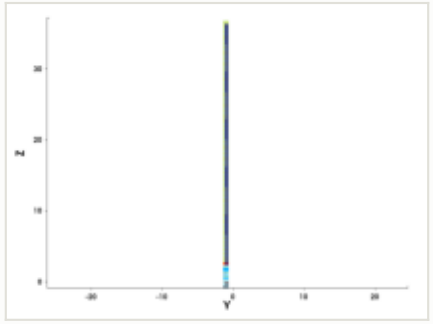

y cut at -1.035 µm

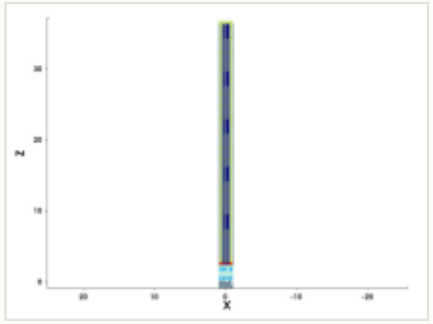

mask for this step

no mask for this step

steps by process area

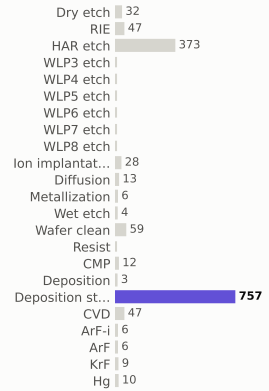

materials deposited (g)

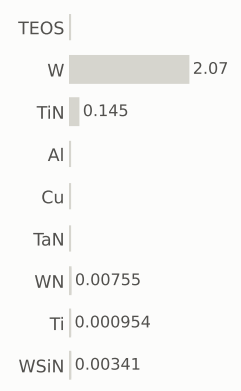

gases emitted (g)

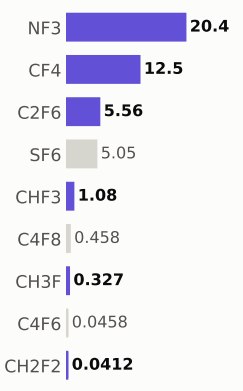

Step #18130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,993.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

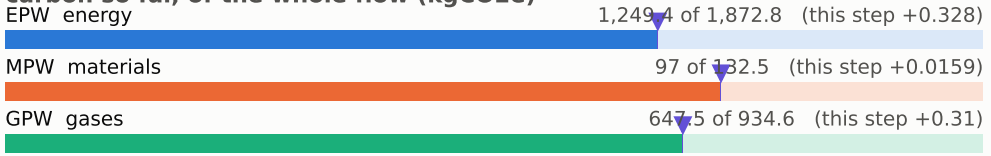

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

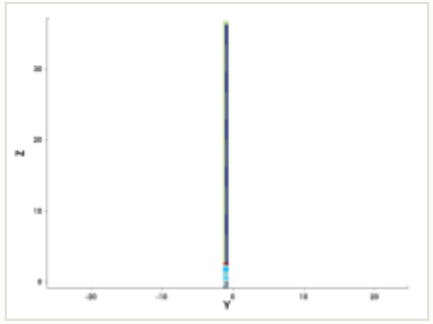

y cut at -1.035 µm

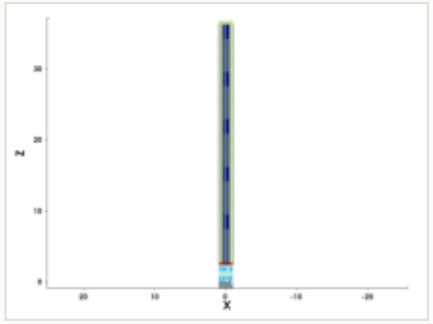

mask for this step

no mask for this step

steps by process area

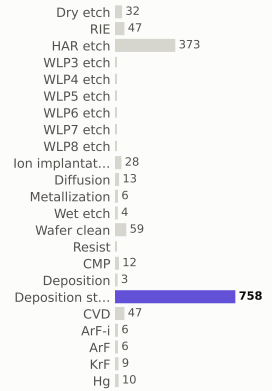

materials deposited (g)

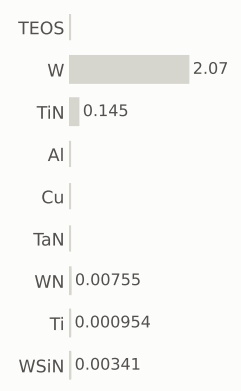

gases emitted (g)

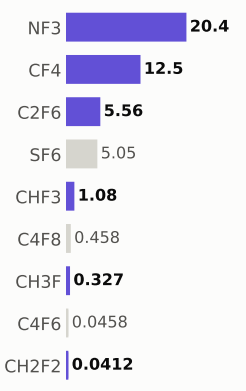

Step #18140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,994.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

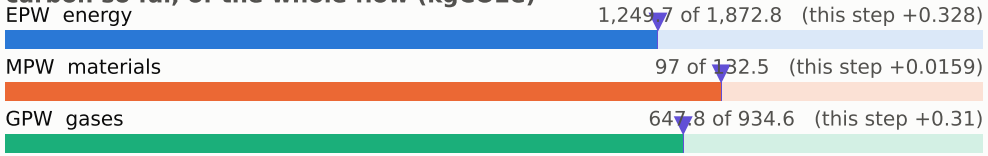

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

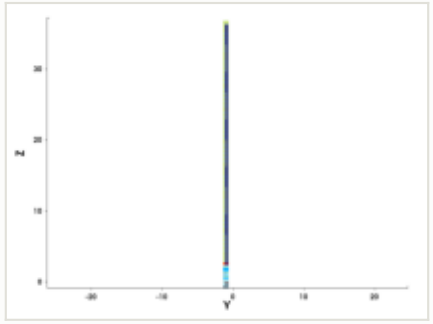

y cut at -1.035 µm

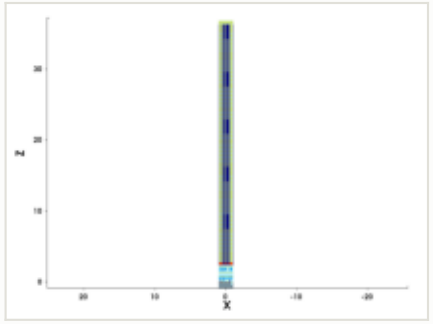

mask for this step

no mask for this step

steps by process area

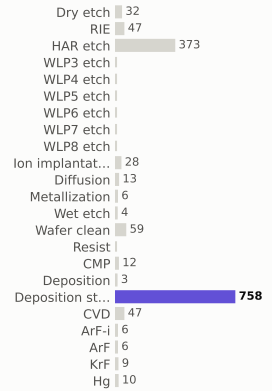

materials deposited (g)

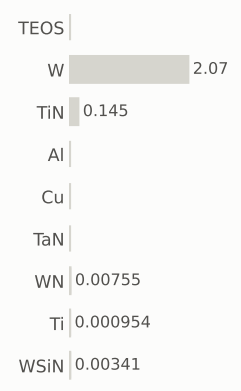

gases emitted (g)

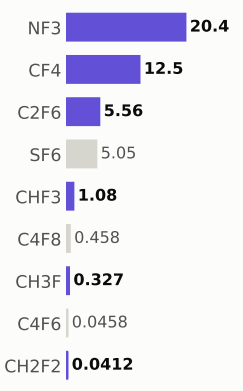

Step #18150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,995.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

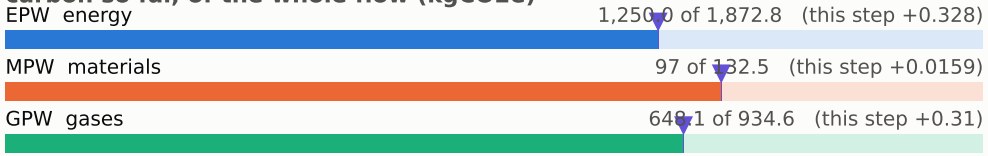

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

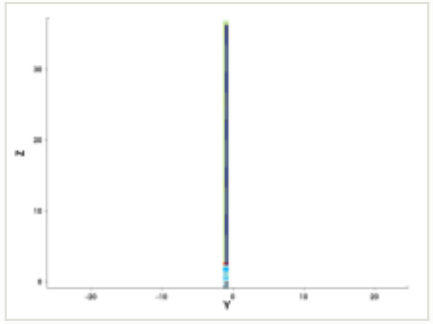

y cut at -1.035 µm

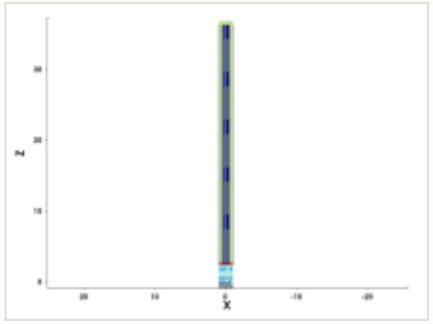

mask for this step

no mask for this step

steps by process area

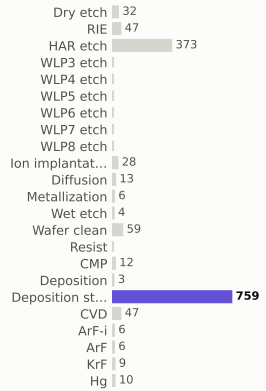

materials deposited (g)

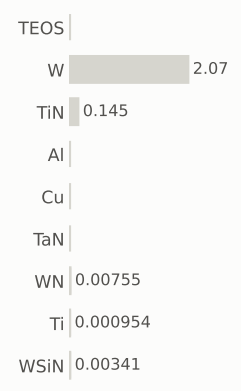

gases emitted (g)

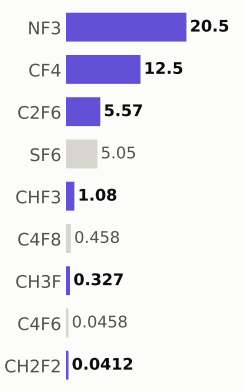

Step #18160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,995.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

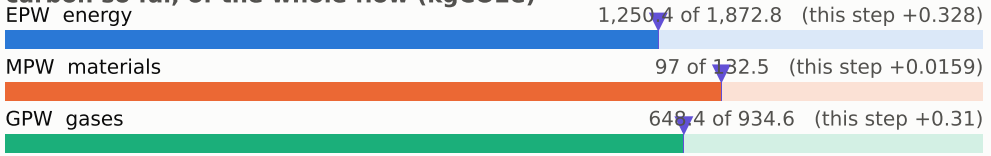

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

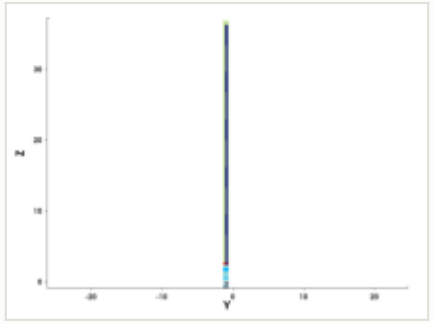

y cut at -1.035 µm

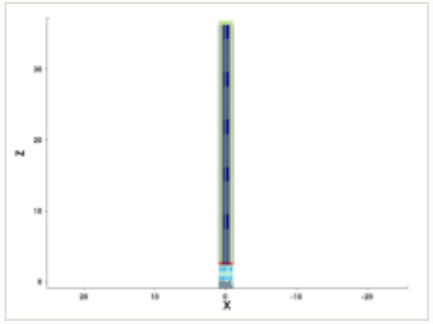

mask for this step

no mask for this step

steps by process area

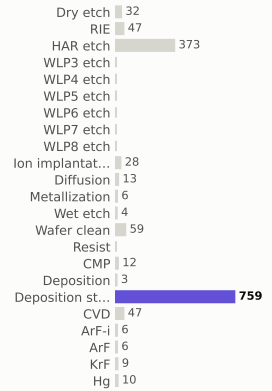

materials deposited (g)

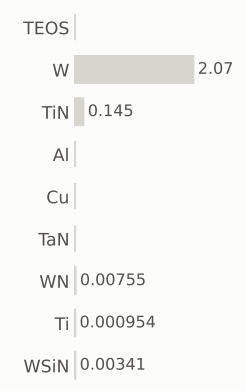

gases emitted (g)

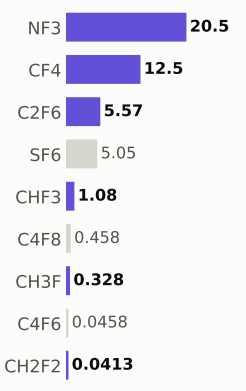

Step #18170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,996.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

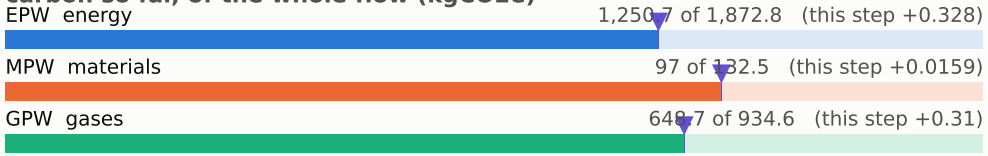

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

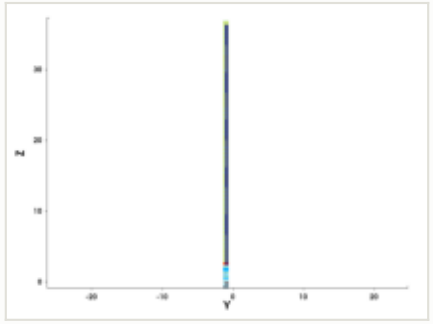

y cut at -1.035 µm

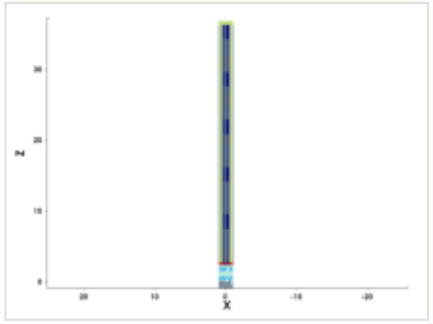

mask for this step

no mask for this step

steps by process area

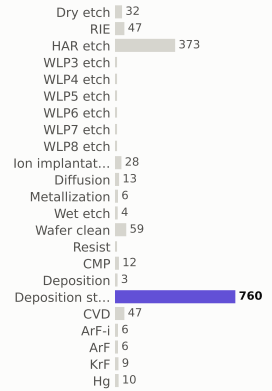

materials deposited (g)

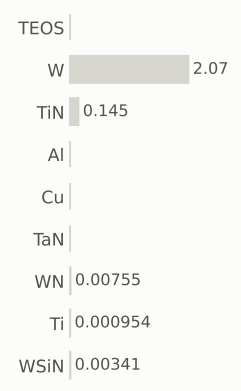

gases emitted (g)

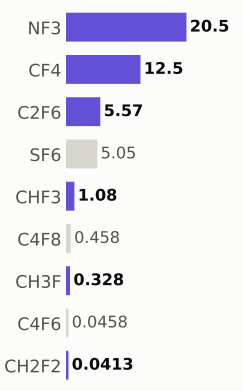

Step #18180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,997.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

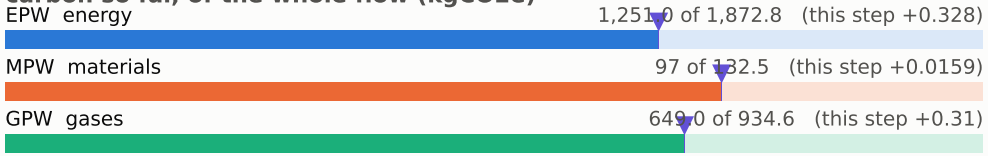

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

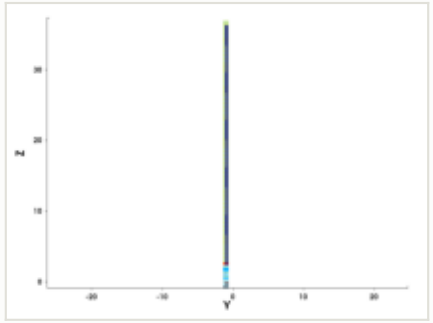

y cut at -1.035 µm

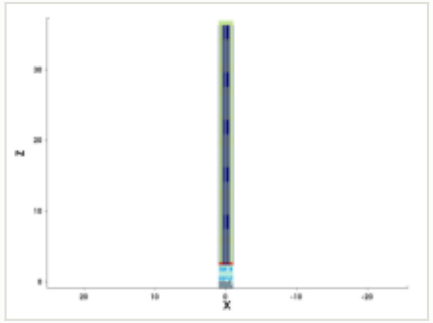

mask for this step

no mask for this step

steps by process area

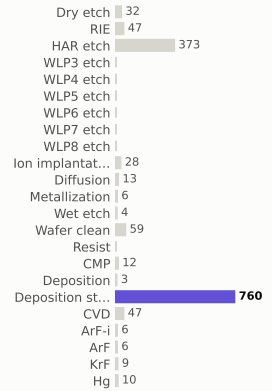

materials deposited (g)

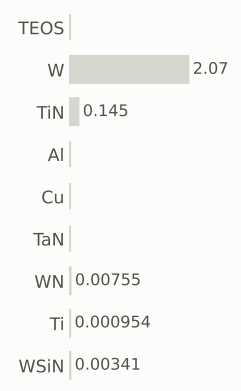

gases emitted (g)

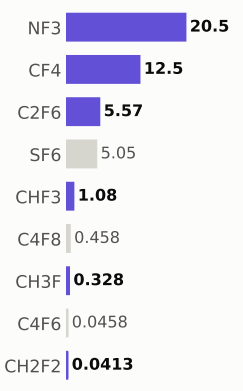

Step #18190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,997.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

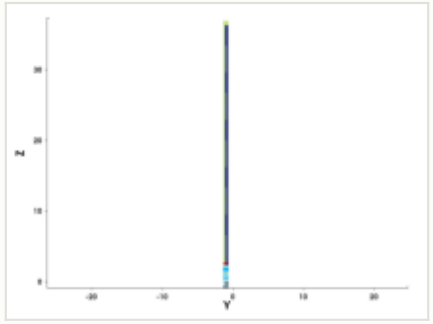

y cut at -1.035 µm

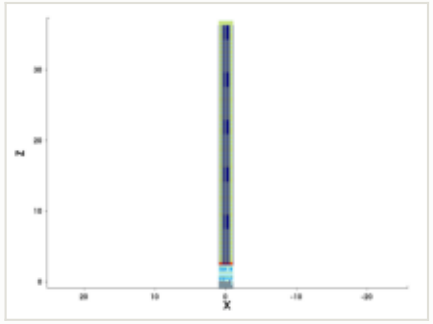

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

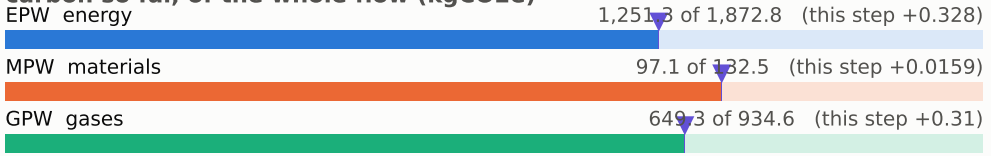

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

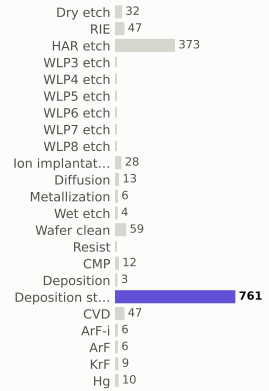

materials deposited (g)

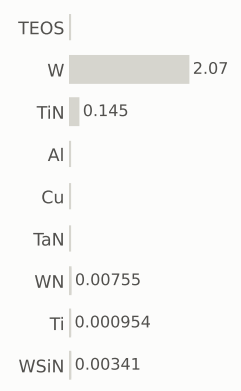

gases emitted (g)

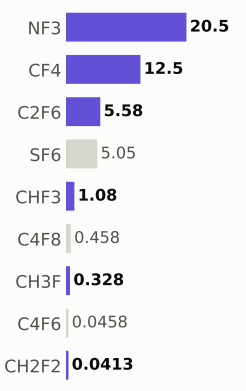

Step #18200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,998.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

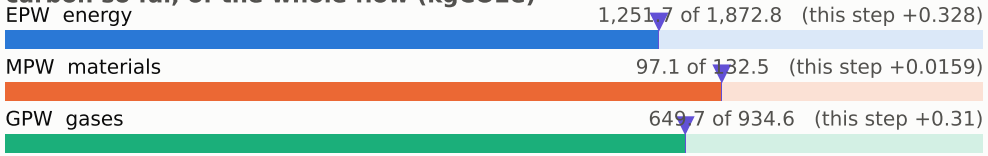

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

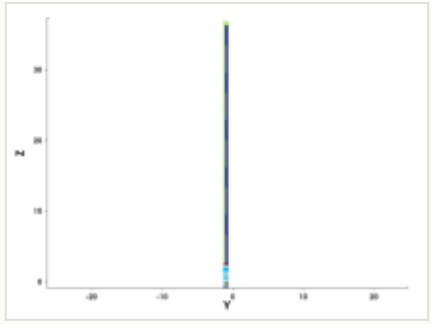

y cut at -1.035 µm

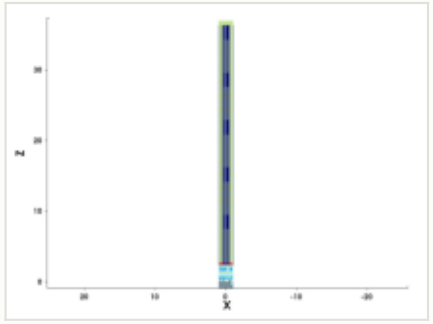

mask for this step

no mask for this step

steps by process area

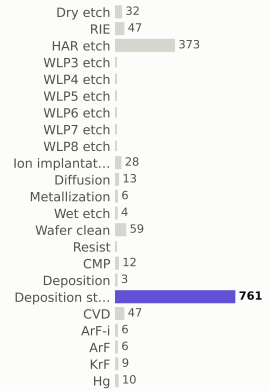

materials deposited (g)

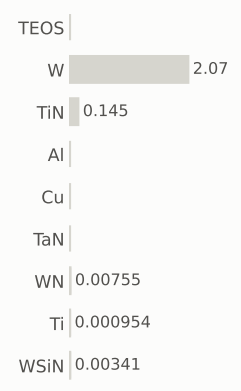

gases emitted (g)

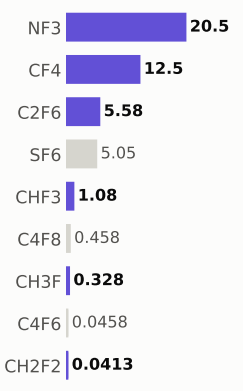

Step #18210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,999.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

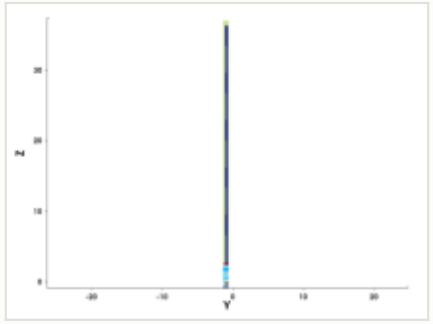

y cut at -1.035 µm

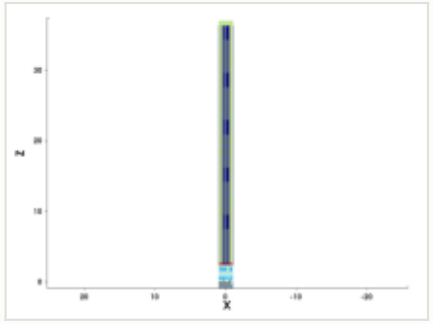

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

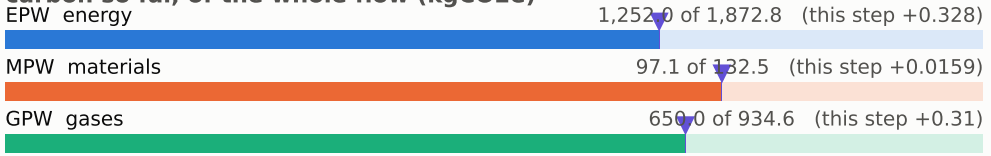

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

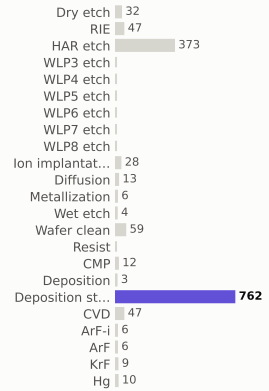

materials deposited (g)

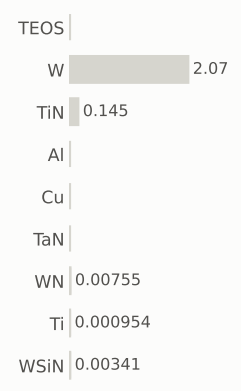

gases emitted (g)

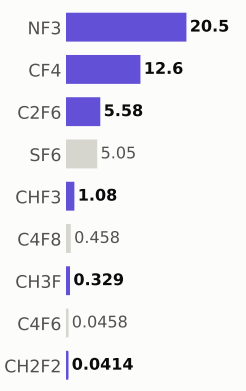

Step #18220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	1,999.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

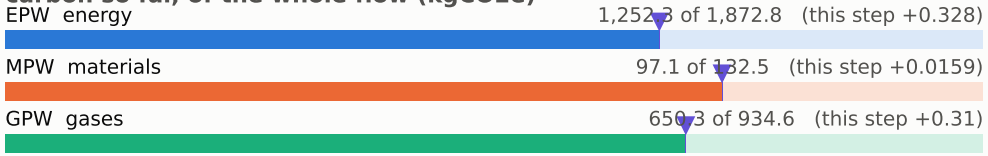

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

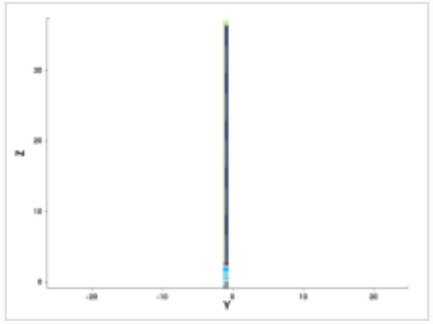

y cut at -1.035 µm

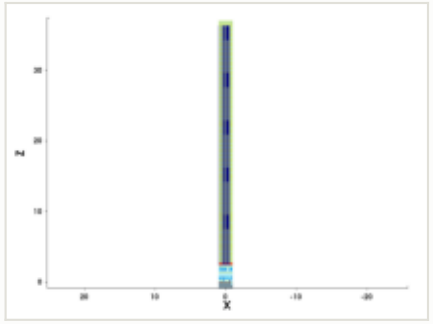

mask for this step

no mask for this step

steps by process area

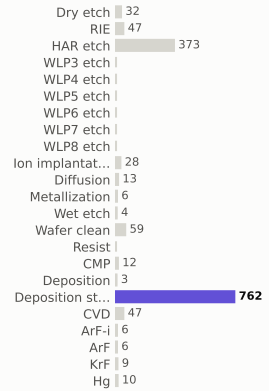

materials deposited (g)

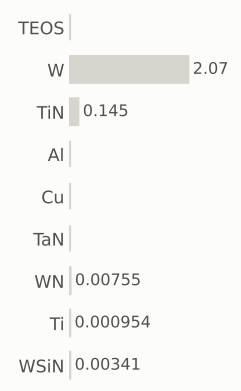

gases emitted (g)

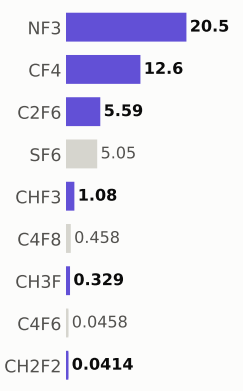

Step #18230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,000.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

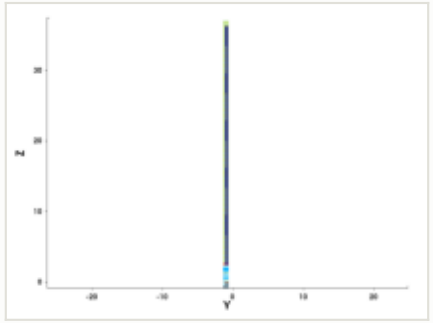

y cut at -1.035 µm

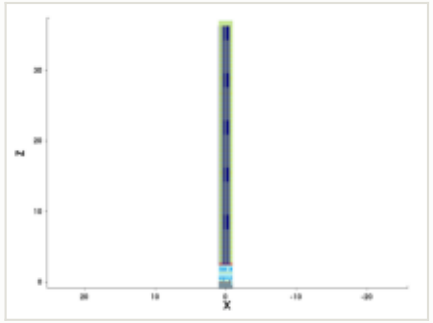

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

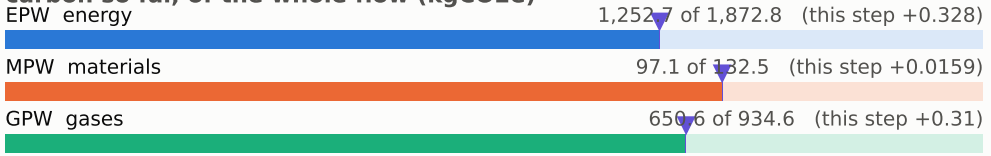

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

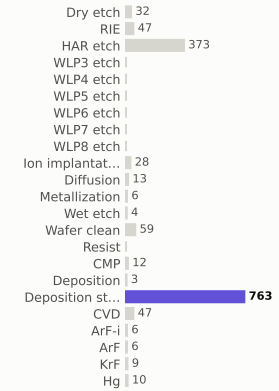

materials deposited (g)

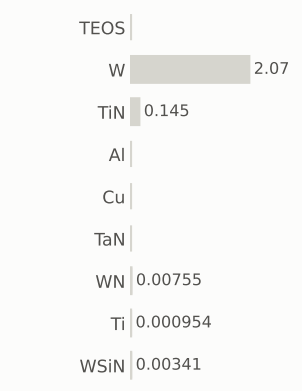

gases emitted (g)

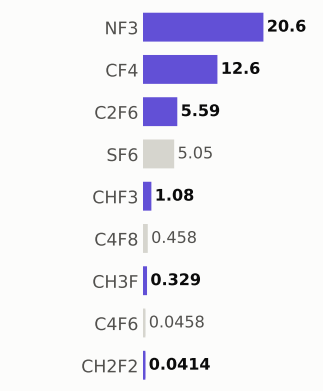

Step #18240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,001.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

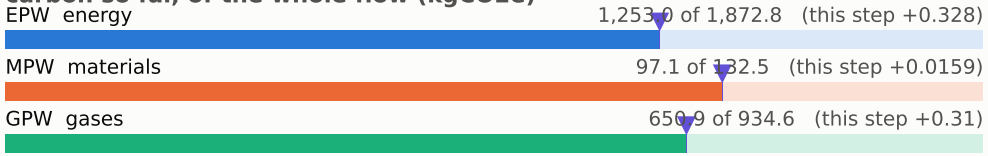

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

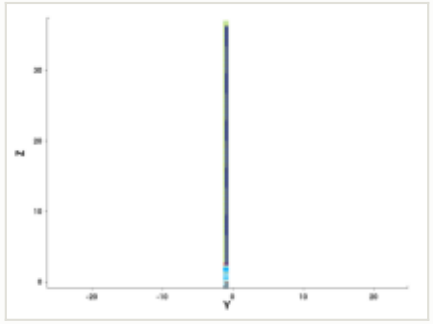

y cut at -1.035 µm

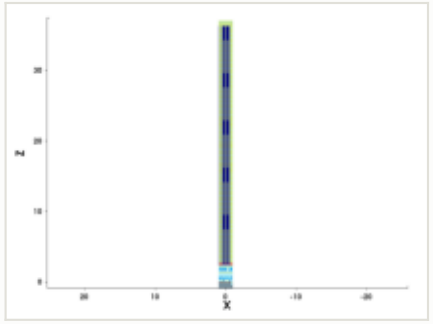

mask for this step

no mask for this step

steps by process area

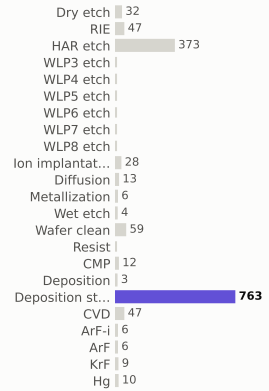

materials deposited (g)

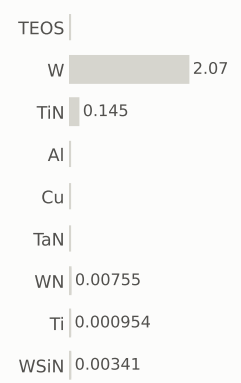

gases emitted (g)

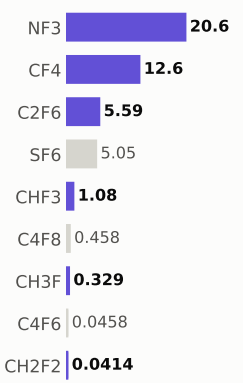

Step #18250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,001.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

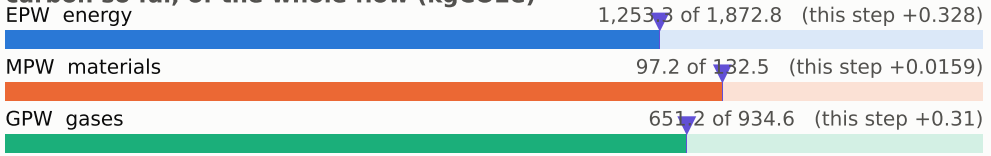

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

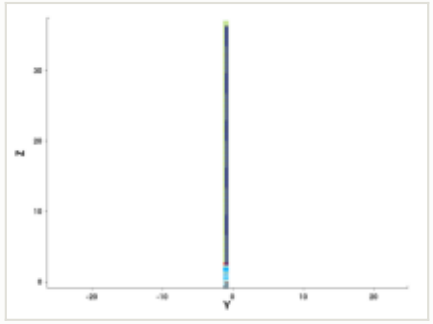

y cut at -1.035 µm

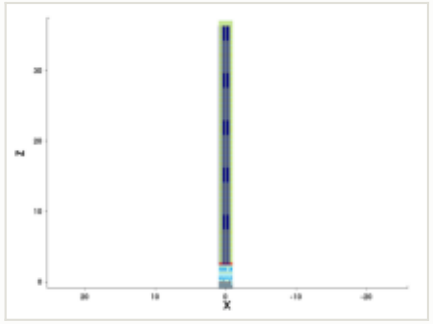

mask for this step

no mask for this step

steps by process area

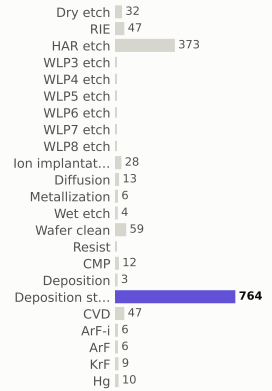

materials deposited (g)

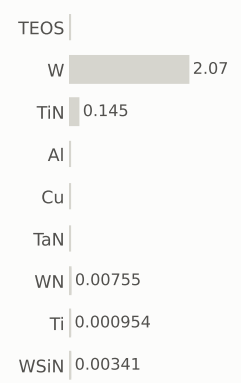

gases emitted (g)

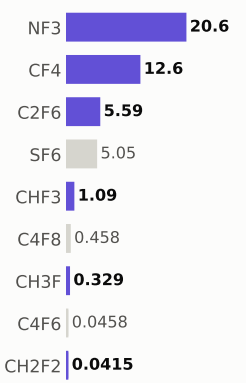

Step #18260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,002.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

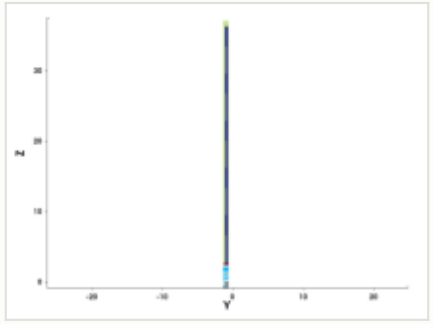

y cut at -1.035 µm

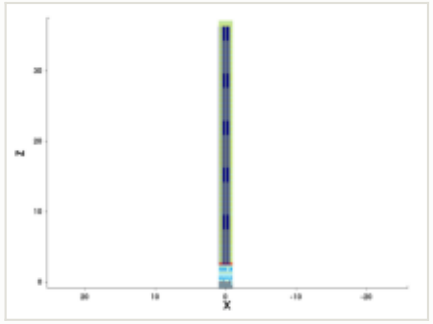

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

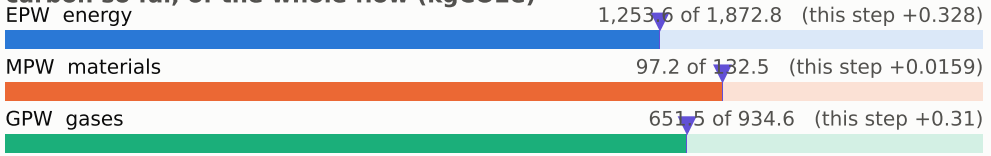

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

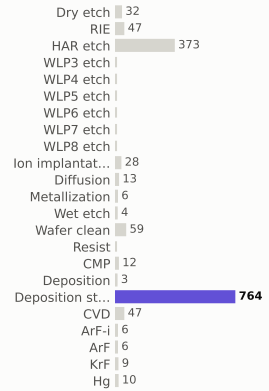

materials deposited (g)

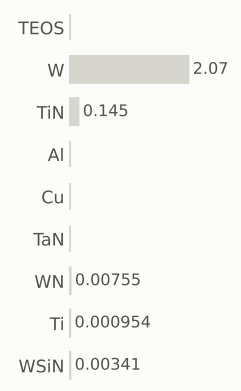

gases emitted (g)

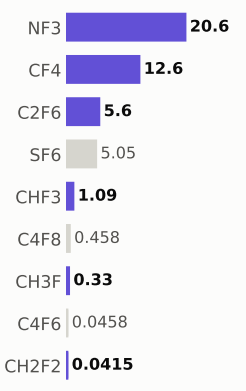

Step #18270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,003.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

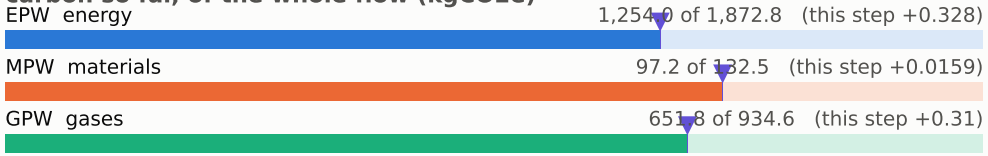

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

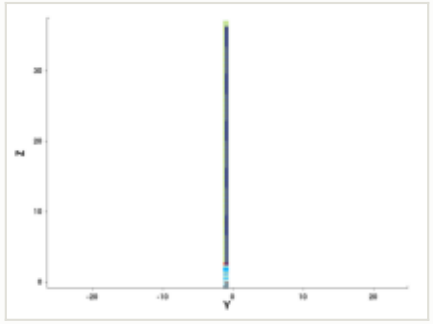

y cut at -1.035 µm

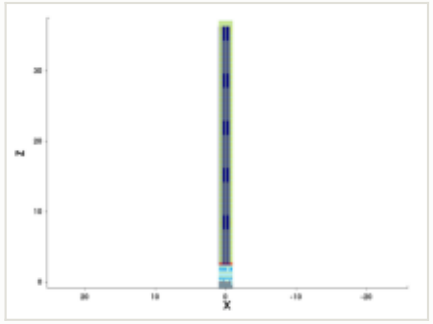

mask for this step

no mask for this step

steps by process area

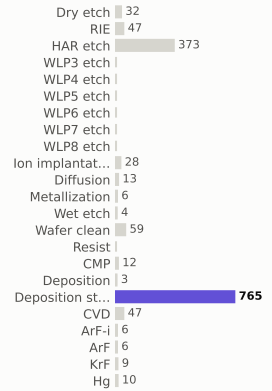

materials deposited (g)

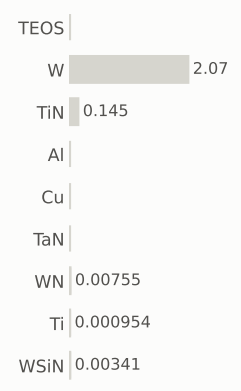

gases emitted (g)

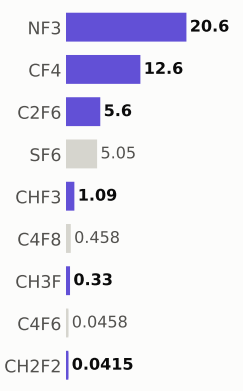

Step #18280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,003.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

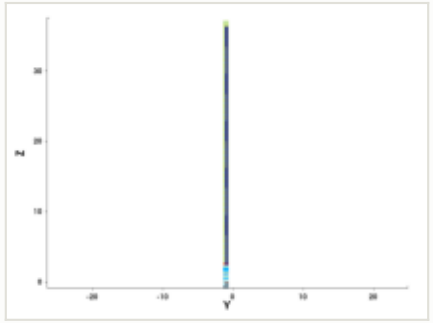

y cut at -1.035 µm

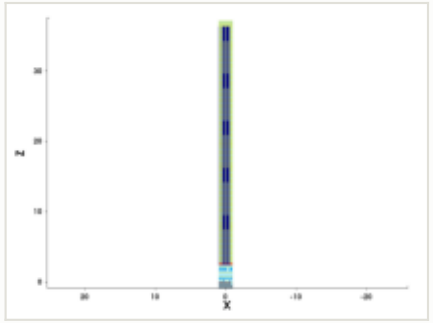

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

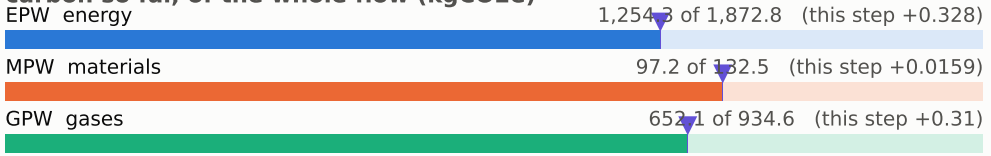

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

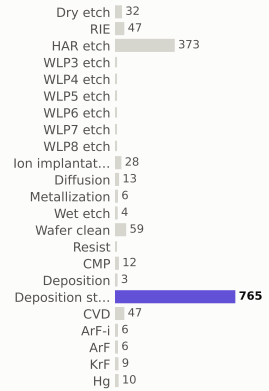

materials deposited (g)

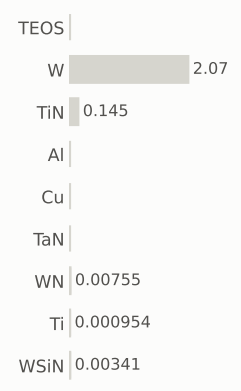

gases emitted (g)

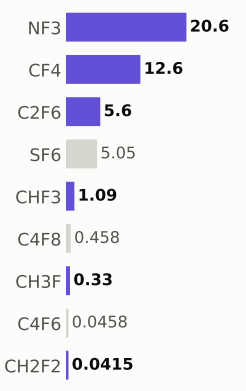

Step #18290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,004.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

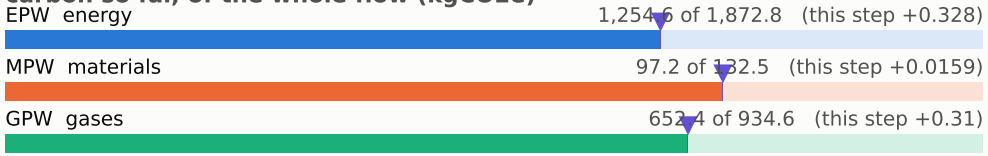

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

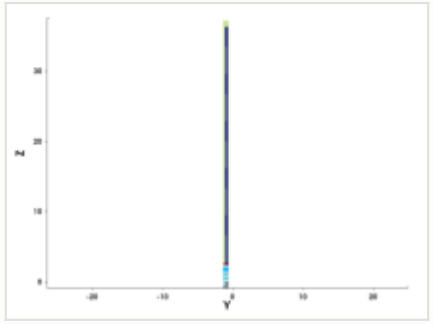

y cut at -1.035 µm

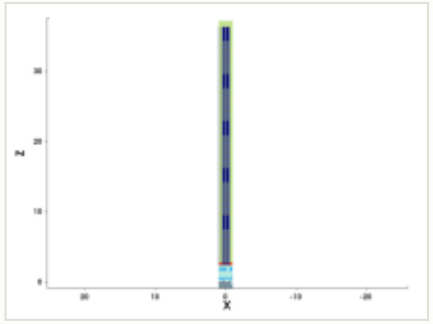

mask for this step

no mask for this step

steps by process area

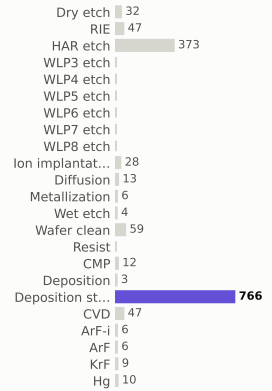

materials deposited (g)

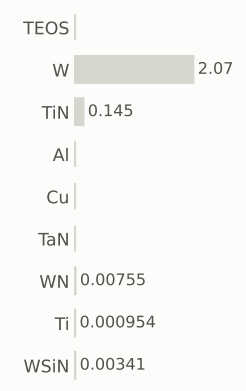

gases emitted (g)

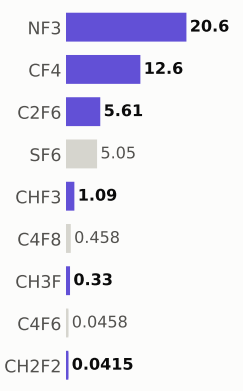

Step #18300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,004.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

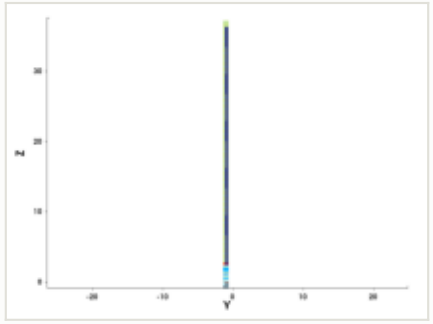

y cut at -1.035 µm

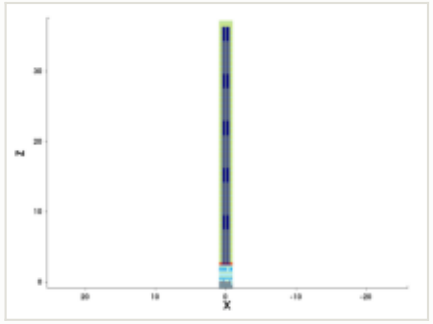

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

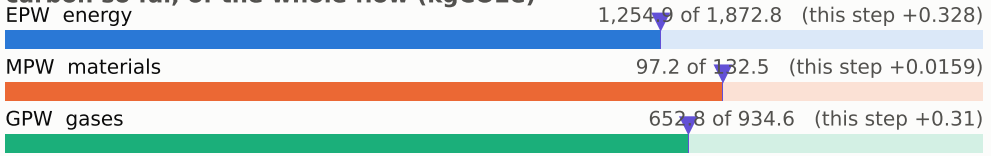

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

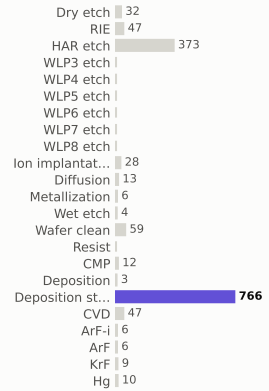

materials deposited (g)

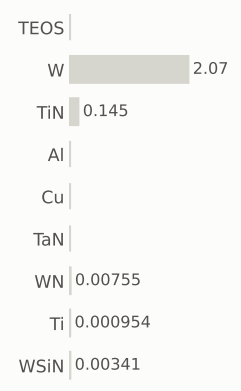

gases emitted (g)

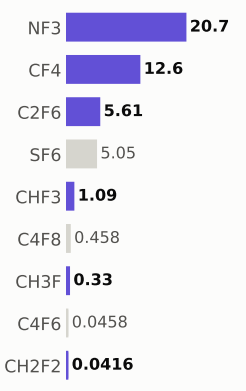

Step #18310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,005.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

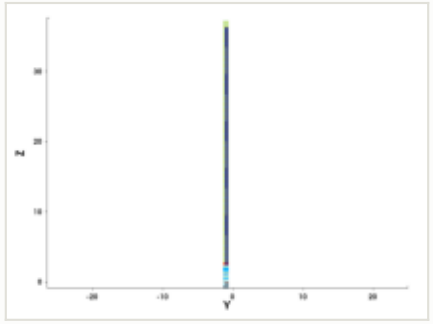

y cut at -1.035 µm

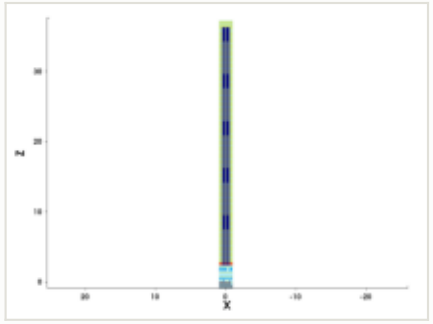

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

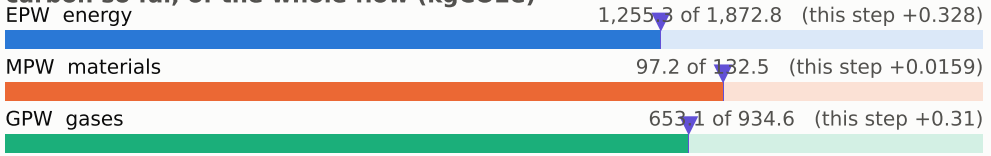

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

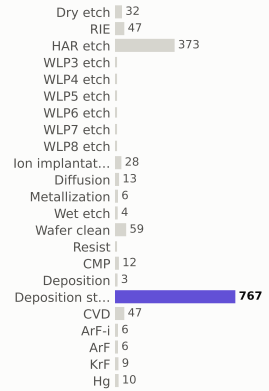

materials deposited (g)

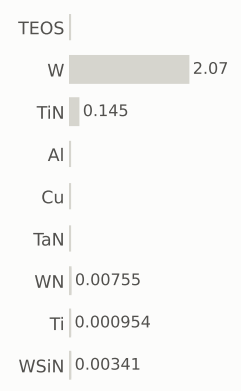

gases emitted (g)

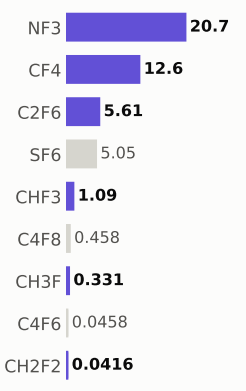

Step #18320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,006.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

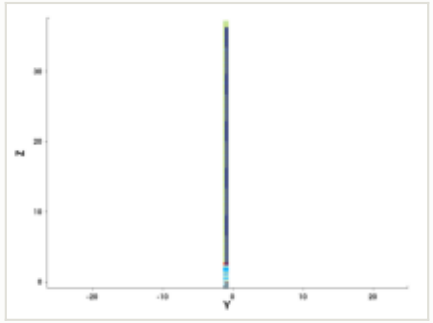

y cut at -1.035 µm

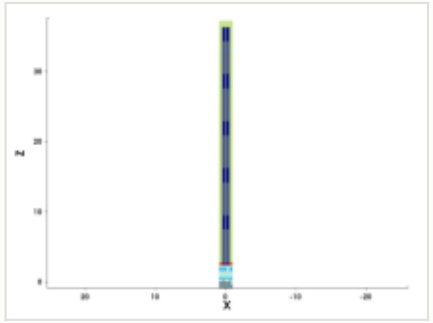

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

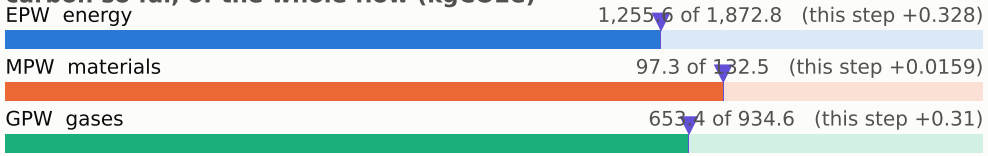

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

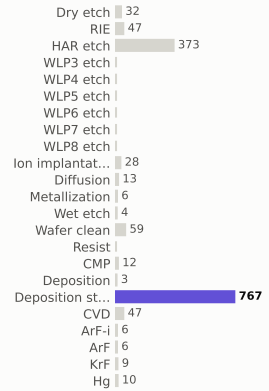

materials deposited (g)

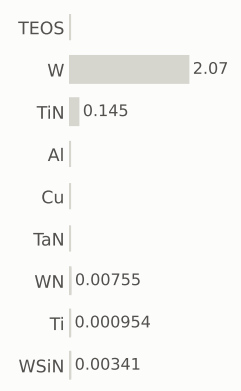

gases emitted (g)

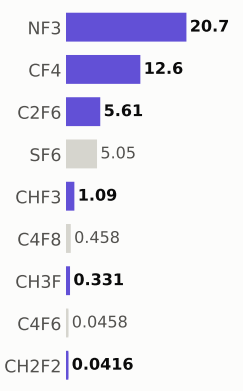

Step #18330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,006.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

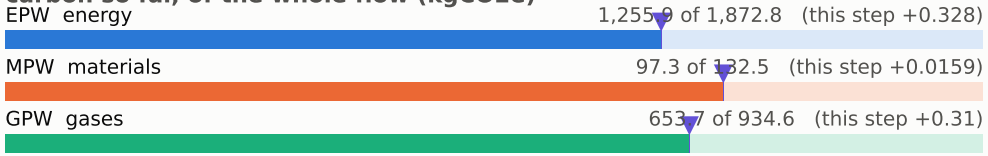

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

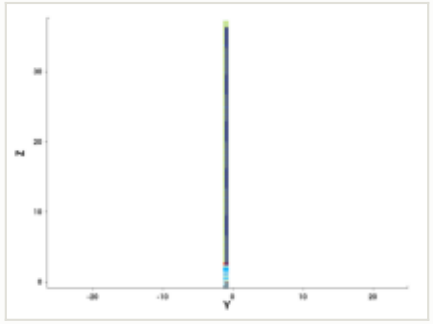

y cut at -1.035 µm

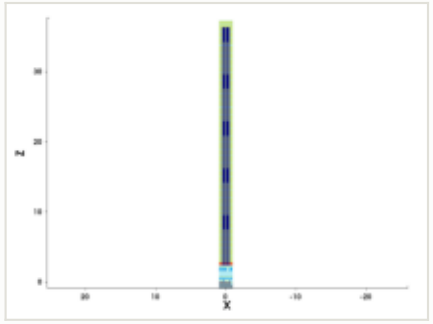

mask for this step

no mask for this step

steps by process area

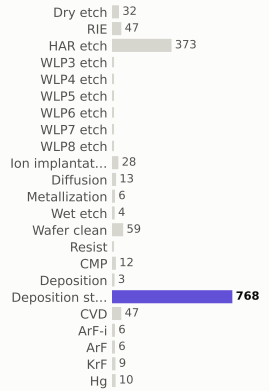

materials deposited (g)

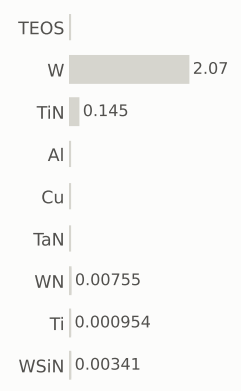

gases emitted (g)

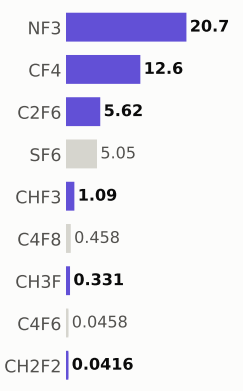

Step #18340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,007.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

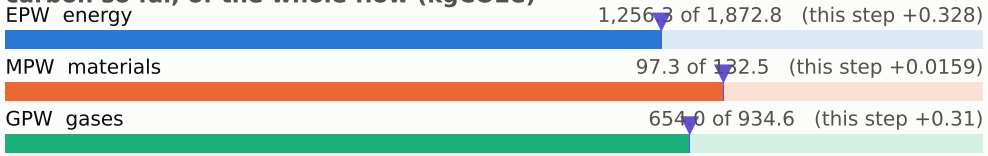

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

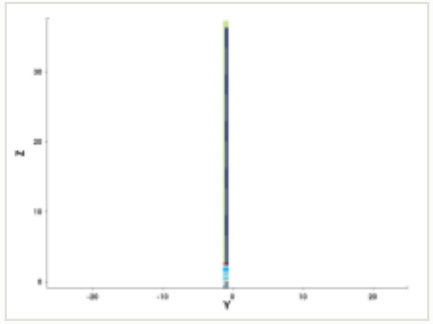

y cut at -1.035 µm

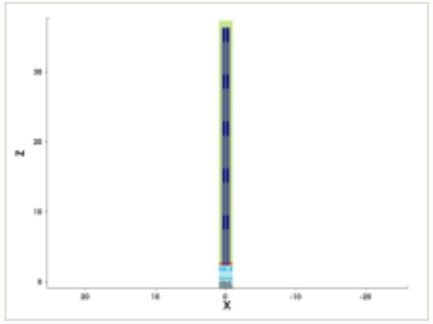

mask for this step

no mask for this step

steps by process area

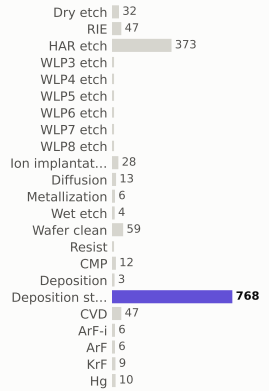

materials deposited (g)

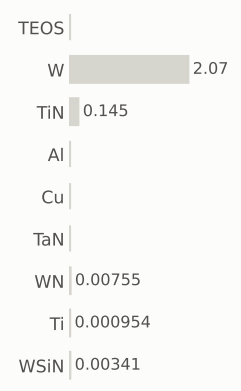

gases emitted (g)

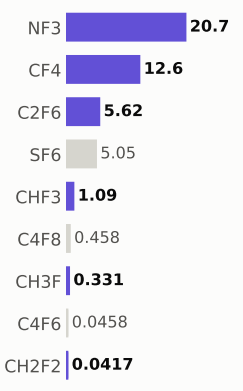

Step #18350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,008.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

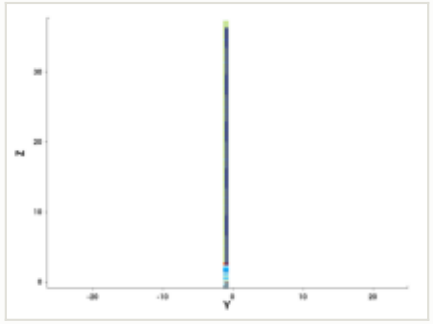

y cut at -1.035 µm

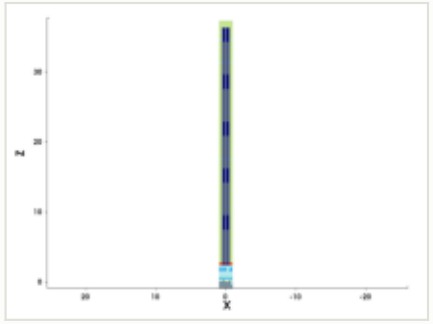

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

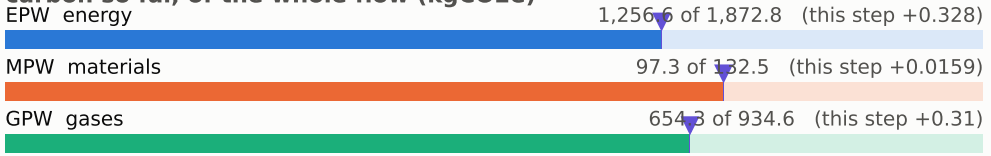

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

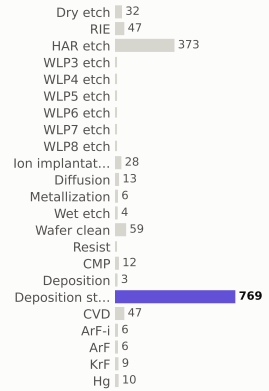

materials deposited (g)

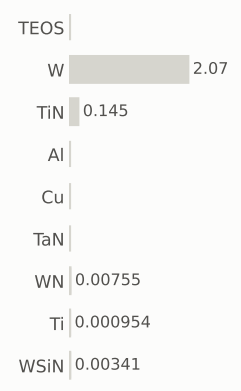

gases emitted (g)

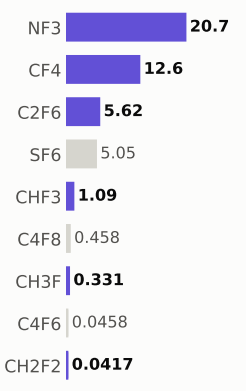

Step #18360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,008.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

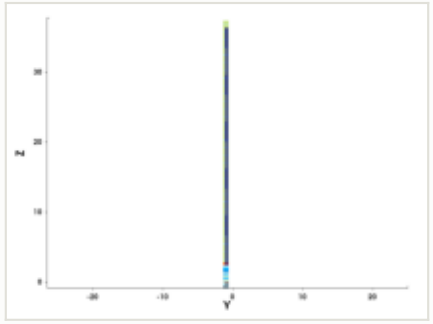

y cut at -1.035 µm

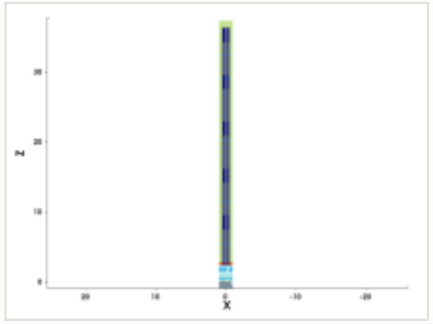

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

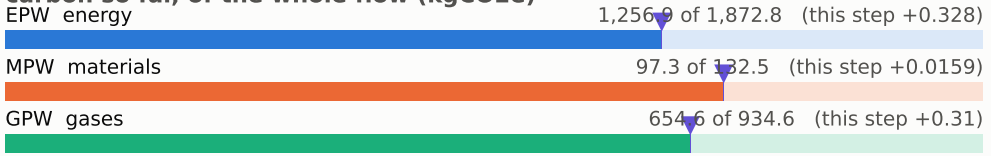

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

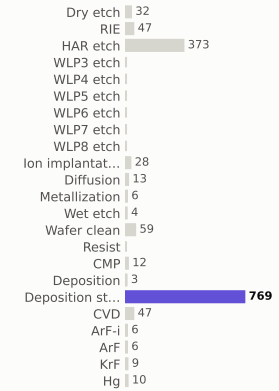

materials deposited (g)

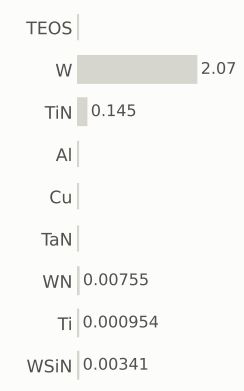

gases emitted (g)

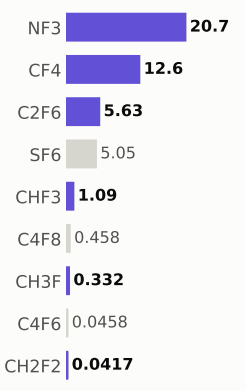

Step #18370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,009.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

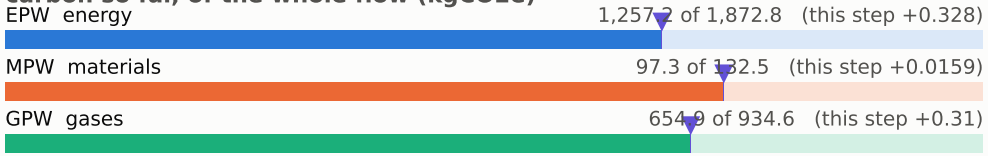

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

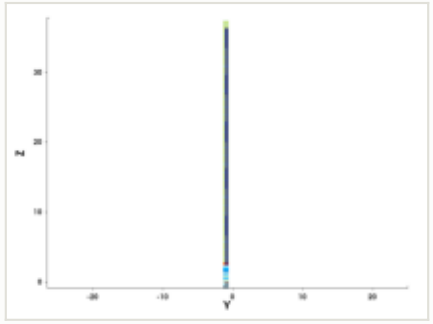

y cut at -1.035 µm

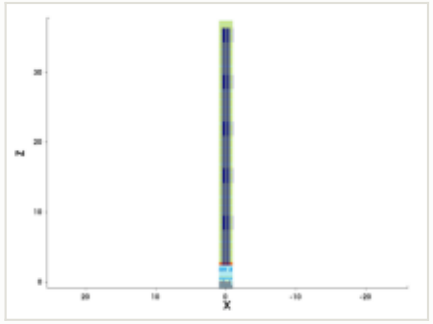

mask for this step

no mask for this step

steps by process area

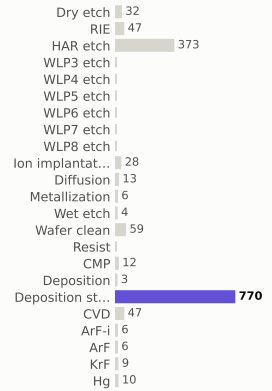

materials deposited (g)

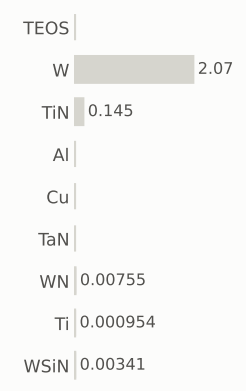

gases emitted (g)

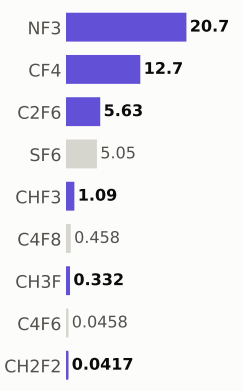

Step #18380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,010.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

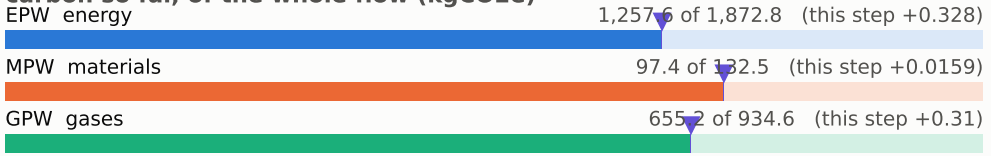

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

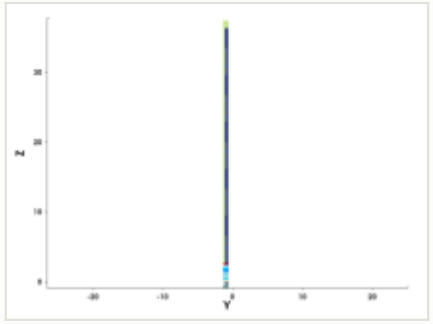

y cut at -1.035 µm

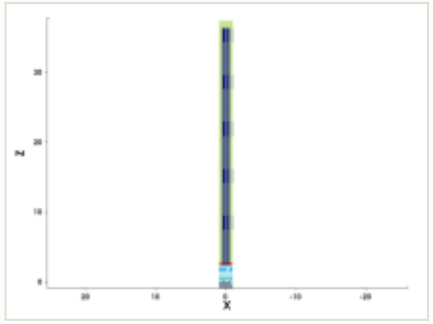

mask for this step

no mask for this step

steps by process area

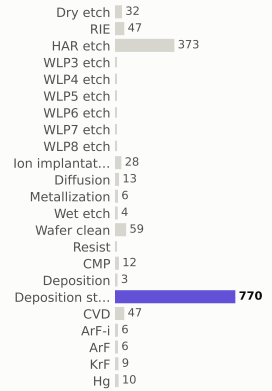

materials deposited (g)

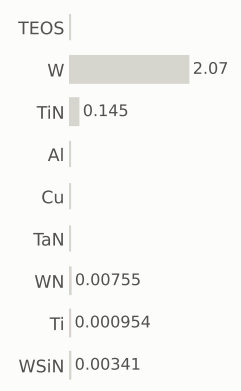

gases emitted (g)

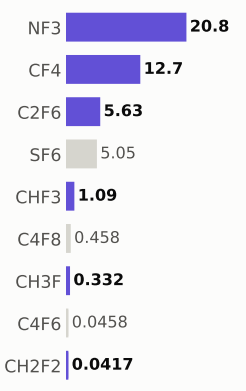

Step #18390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,010.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

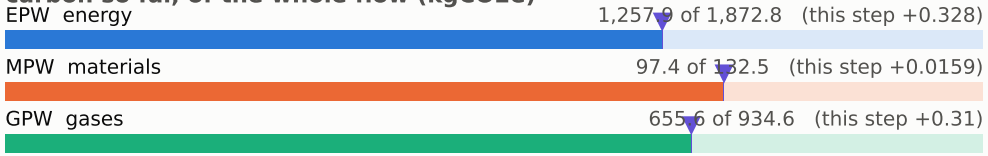

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

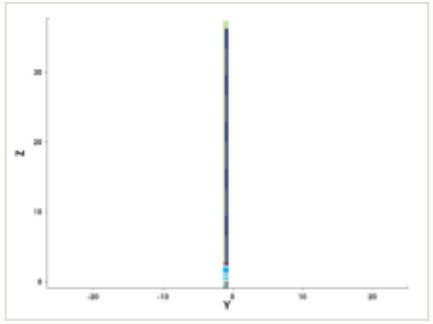

y cut at -1.035 µm

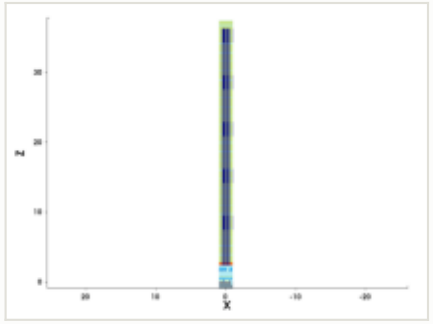

mask for this step

no mask for this step

steps by process area

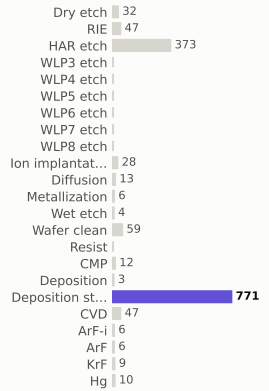

materials deposited (g)

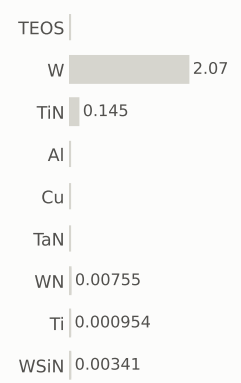

gases emitted (g)

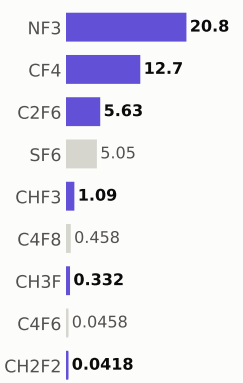

Step #18400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,011.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

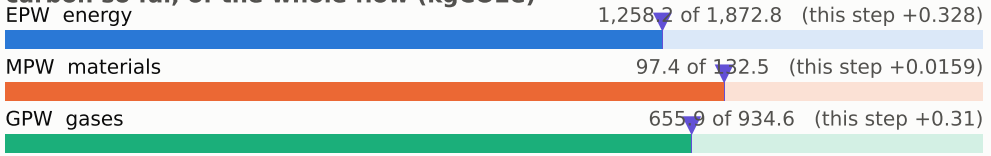

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

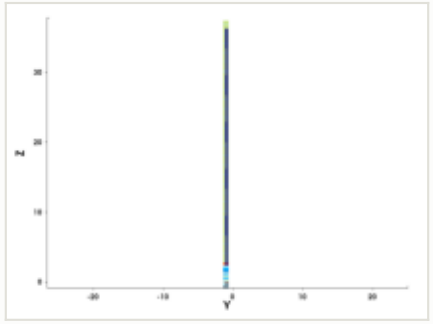

y cut at -1.035 µm

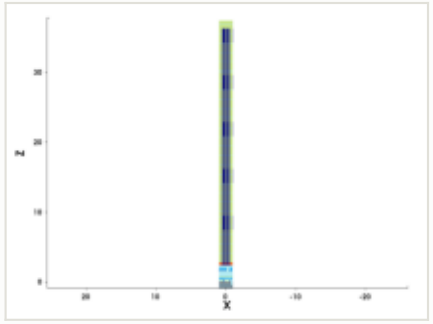

mask for this step

no mask for this step

steps by process area

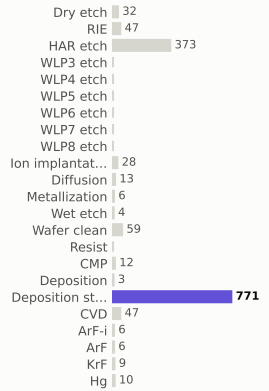

materials deposited (g)

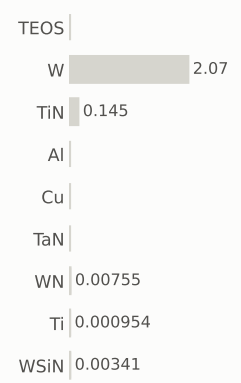

gases emitted (g)

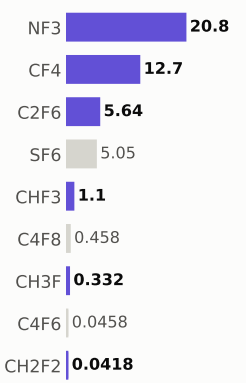

Step #18410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,012.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

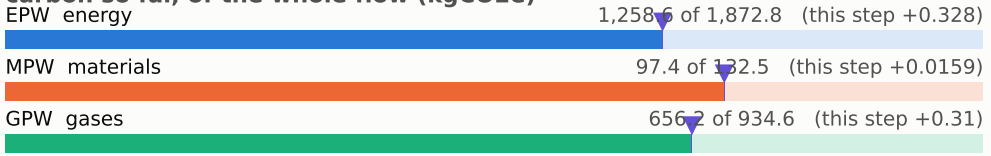

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

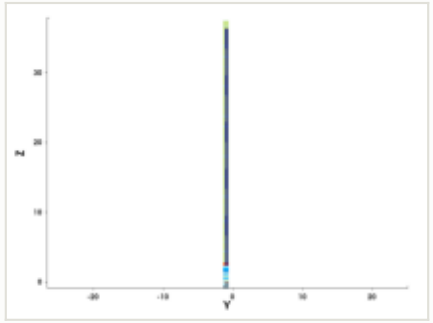

y cut at -1.035 µm

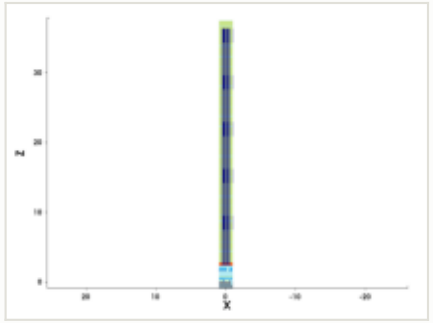

mask for this step

no mask for this step

steps by process area

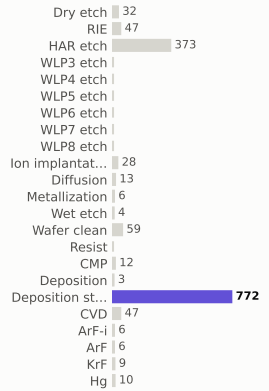

materials deposited (g)

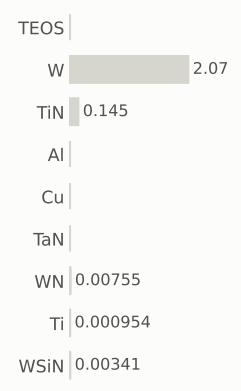

gases emitted (g)

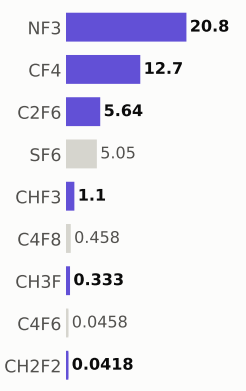

Step #18420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,012.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

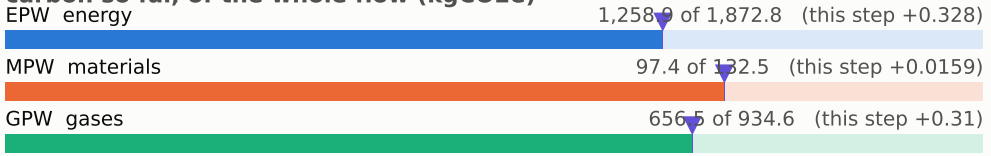

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

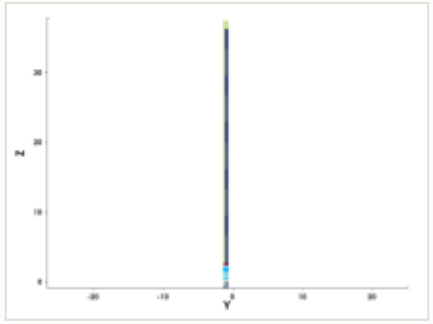

y cut at -1.035 µm

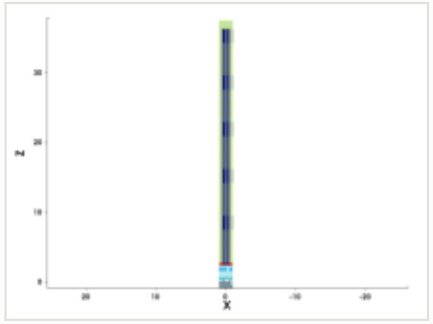

mask for this step

no mask for this step

steps by process area

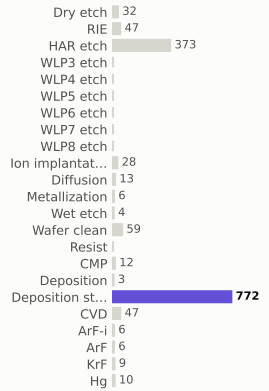

materials deposited (g)

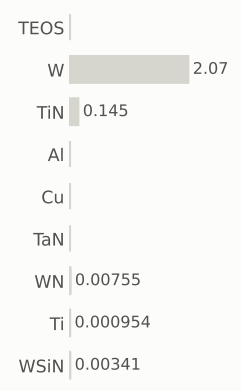

gases emitted (g)

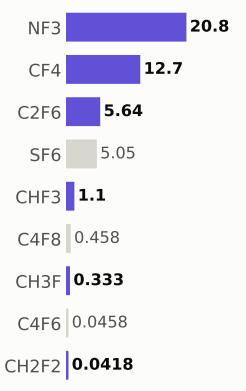

Step #18430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,013.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

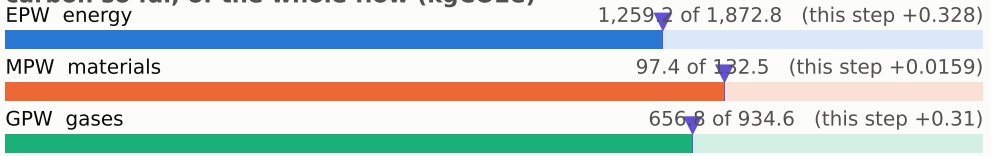

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

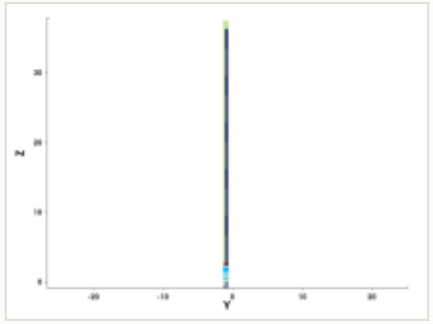

y cut at -1.035 µm

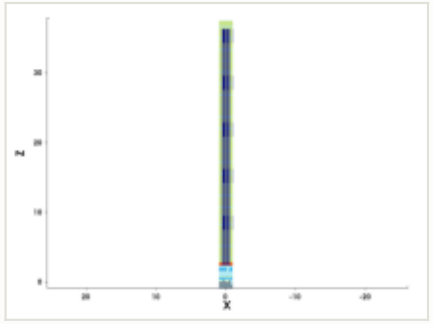

mask for this step

no mask for this step

steps by process area

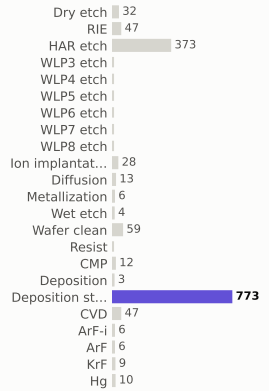

materials deposited (g)

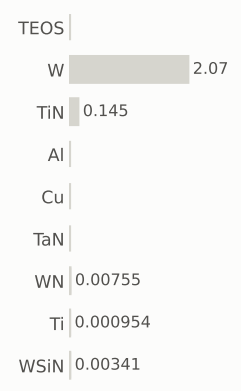

gases emitted (g)

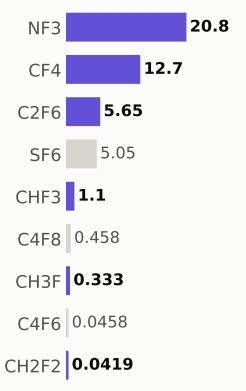

Step #18440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,014.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

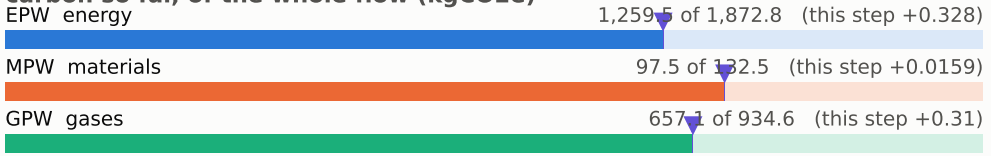

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

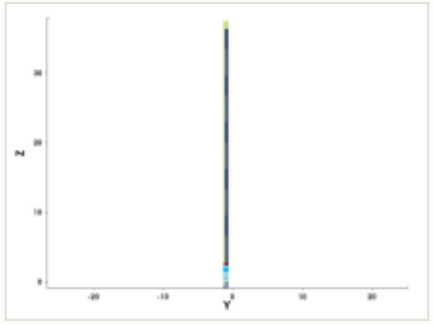

y cut at -1.035 µm

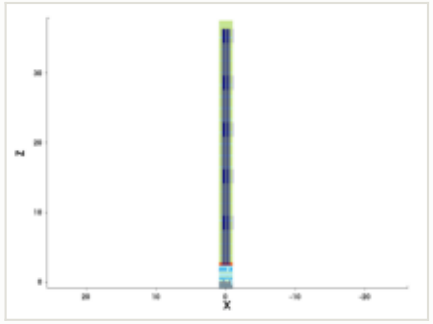

mask for this step

no mask for this step

steps by process area

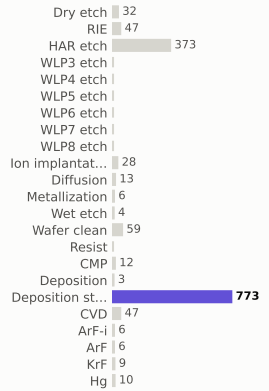

materials deposited (g)

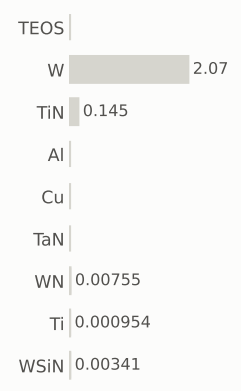

gases emitted (g)

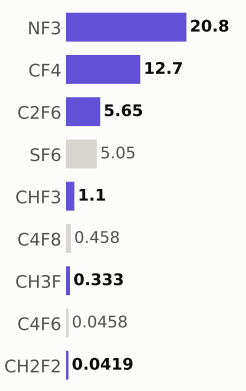

Step #18450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,014.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

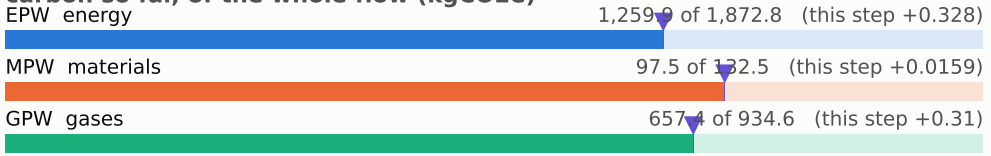

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

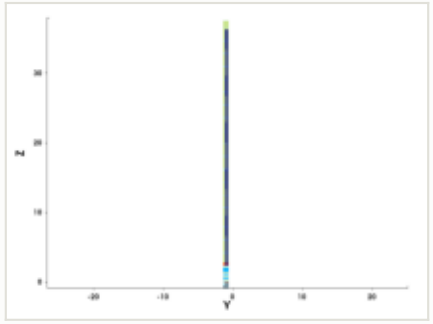

y cut at -1.035 µm

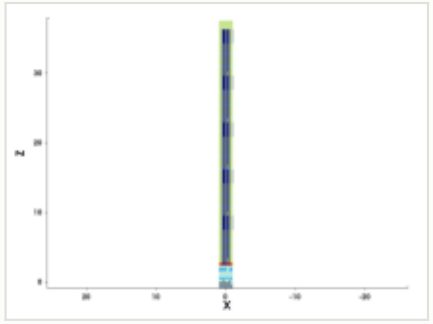

mask for this step

no mask for this step

steps by process area

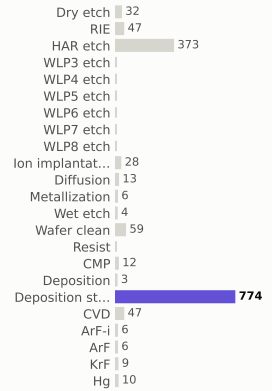

materials deposited (g)

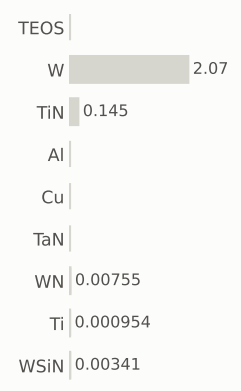

gases emitted (g)

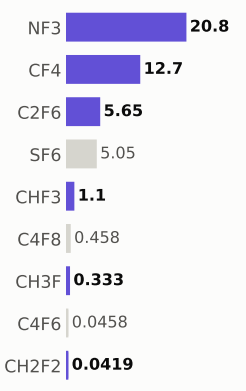

Step #18460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,015.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

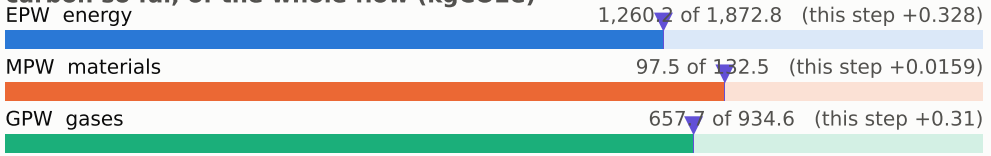

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

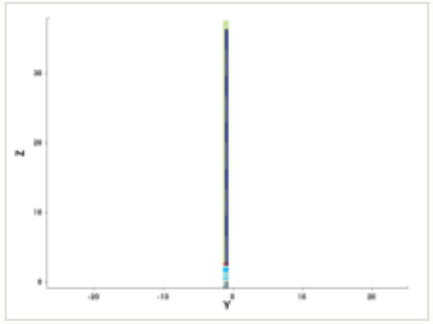

y cut at -1.035 µm

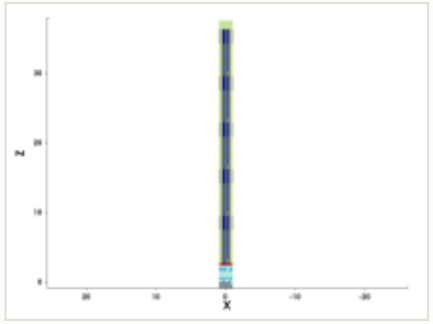

mask for this step

no mask for this step

steps by process area

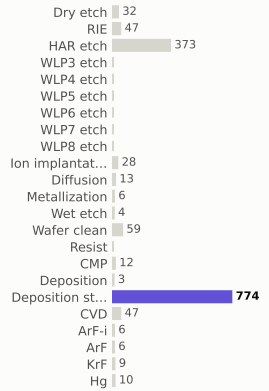

materials deposited (g)

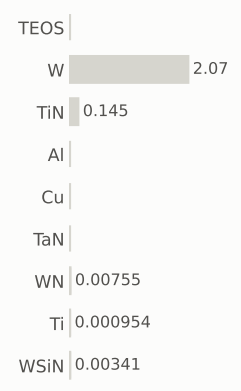

gases emitted (g)

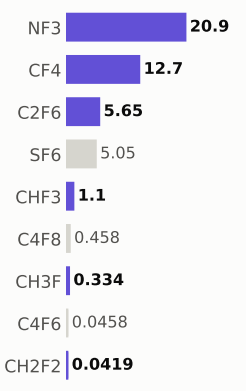

Step #18470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,016.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

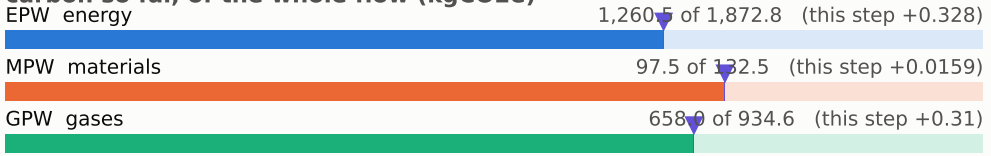

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

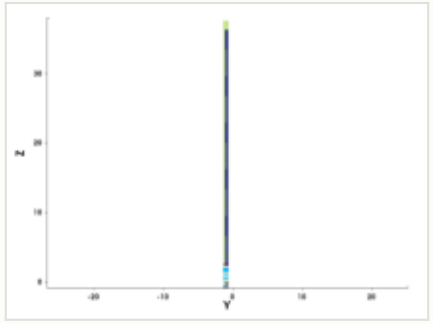

y cut at -1.035 µm

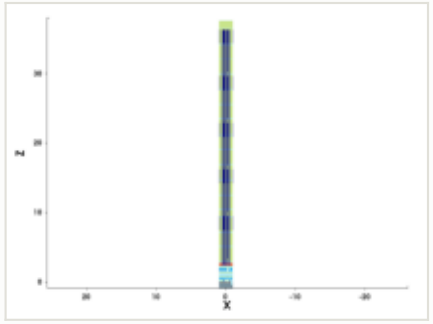

mask for this step

no mask for this step

steps by process area

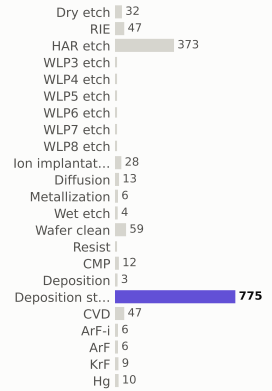

materials deposited (g)

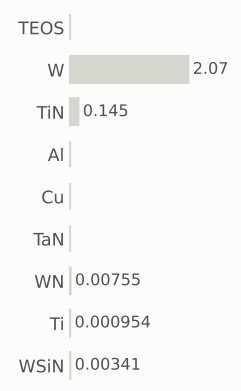

gases emitted (g)

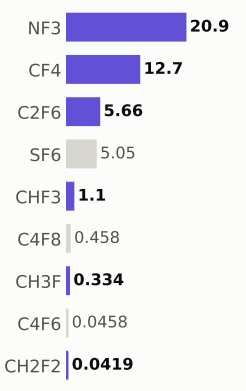

Step #18480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,016.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

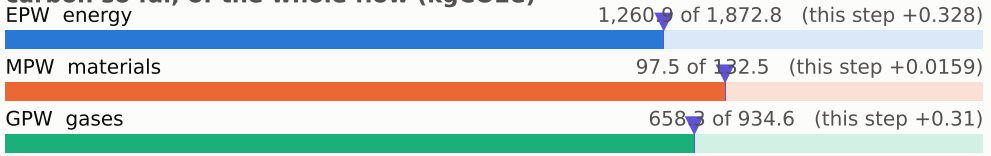

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

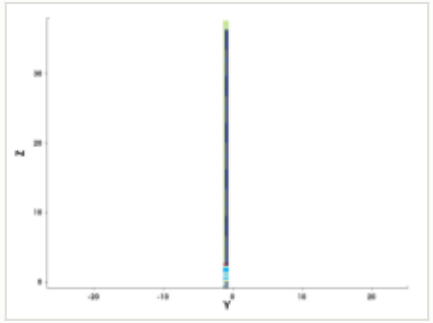

y cut at -1.035 µm

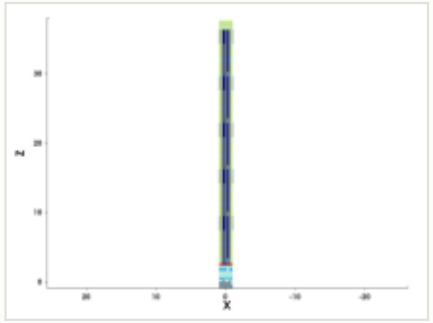

mask for this step

no mask for this step

steps by process area

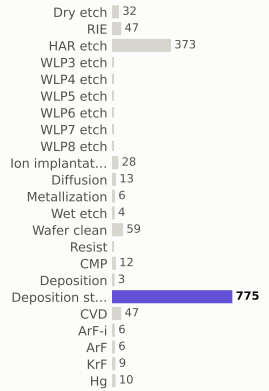

materials deposited (g)

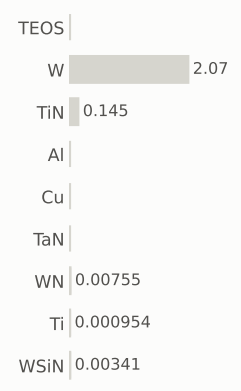

gases emitted (g)

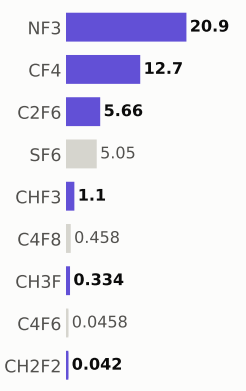

Step #18490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,017.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

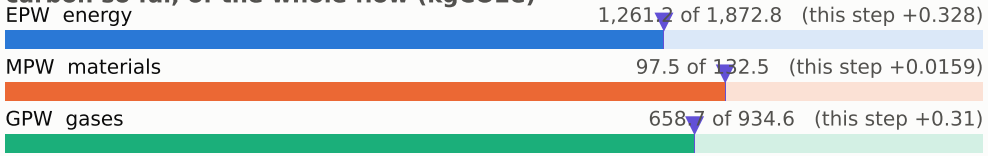

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

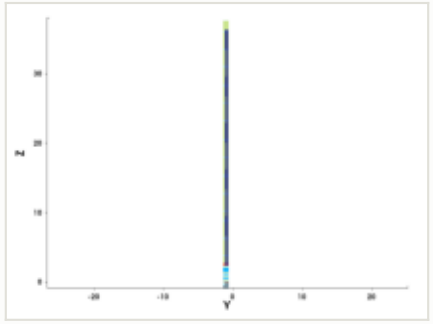

y cut at -1.035 µm

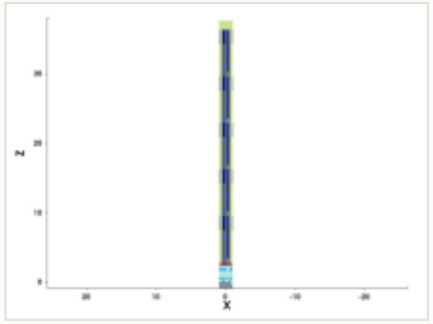

mask for this step

no mask for this step

steps by process area

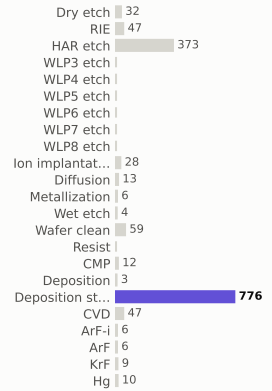

materials deposited (g)

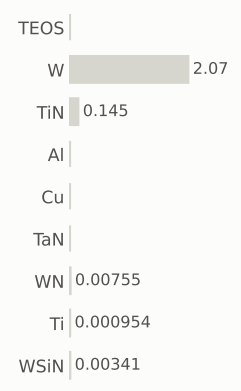

gases emitted (g)

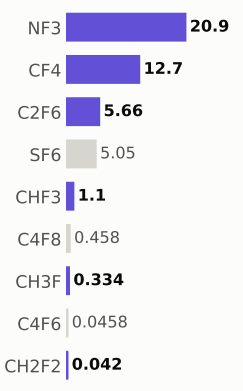

Step #18500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,018.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

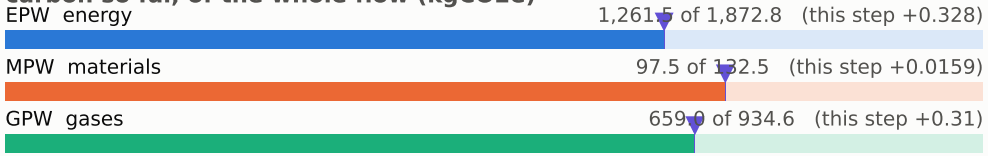

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

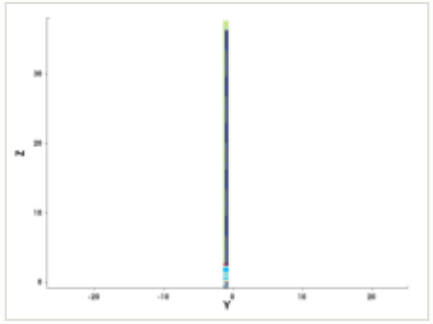

y cut at -1.035 µm

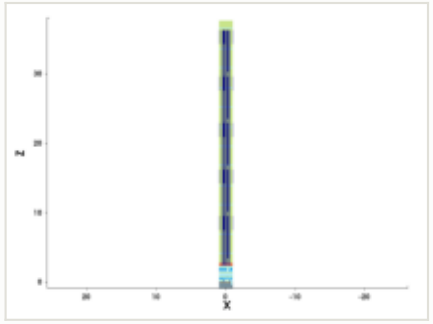

mask for this step

no mask for this step

steps by process area

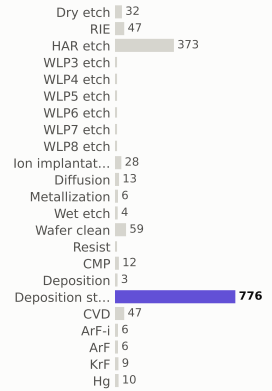

materials deposited (g)

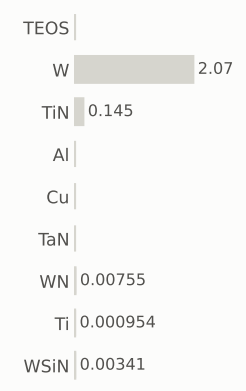

gases emitted (g)

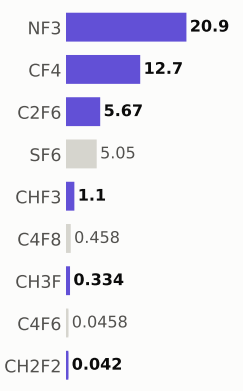

Step #18510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,018.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

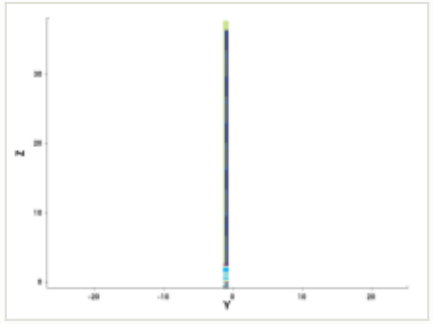

y cut at -1.035 µm

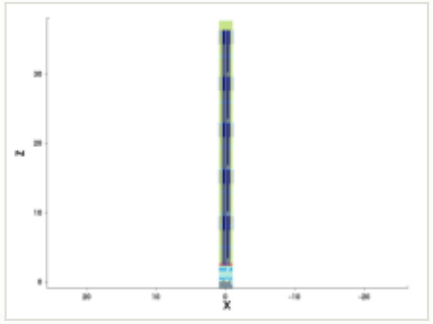

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

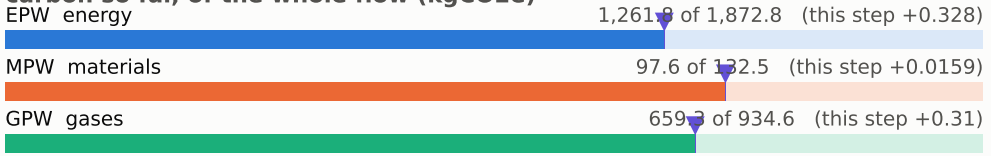

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

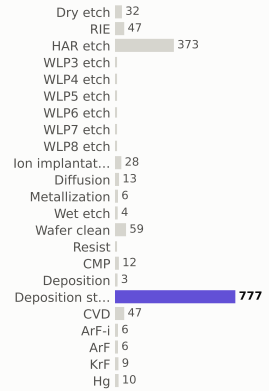

materials deposited (g)

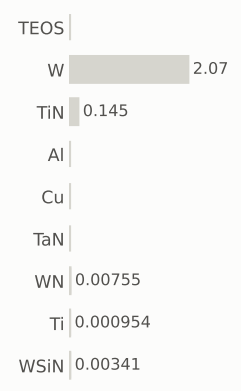

gases emitted (g)

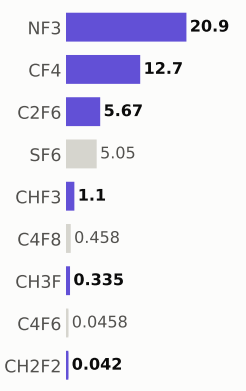

Step #18520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,019.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

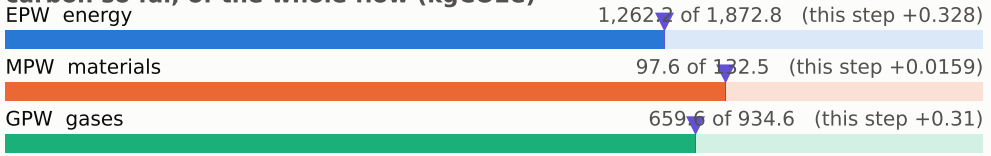

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

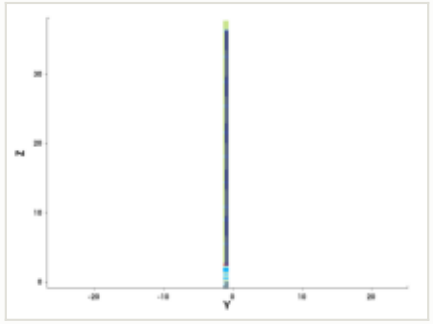

y cut at -1.035 µm

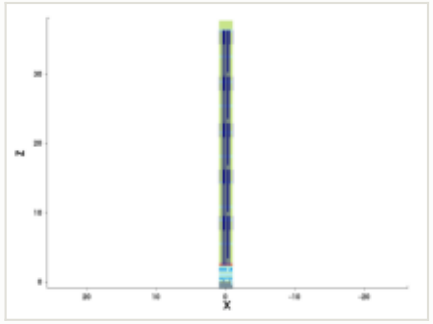

mask for this step

no mask for this step

steps by process area

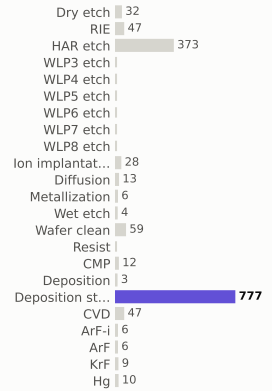

materials deposited (g)

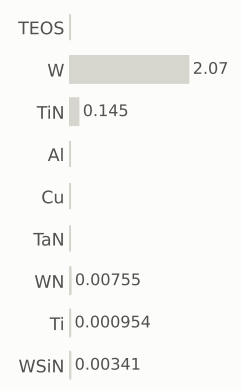

gases emitted (g)

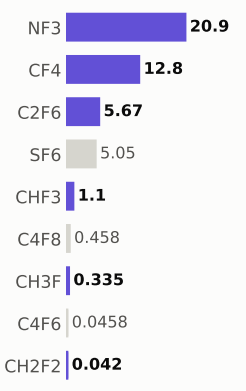

Step #18530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,020.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

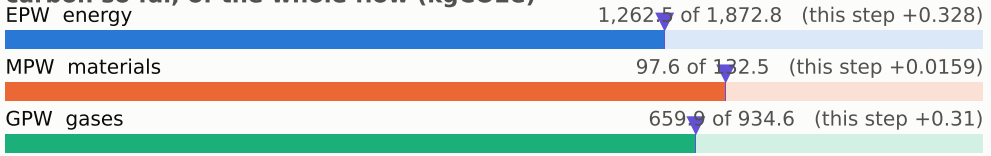

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

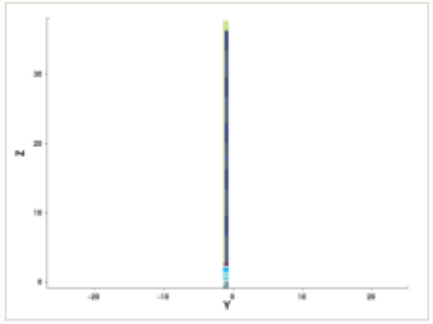

y cut at -1.035 µm

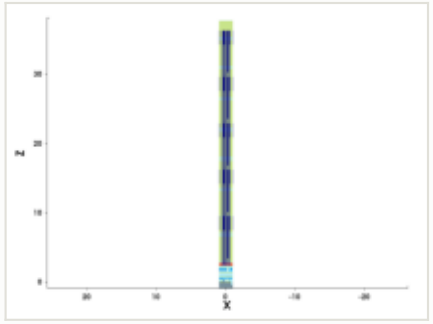

mask for this step

no mask for this step

steps by process area

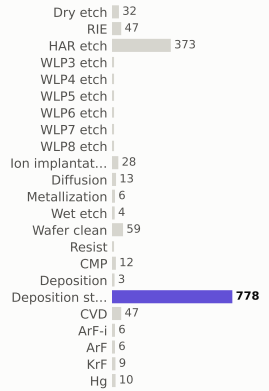

materials deposited (g)

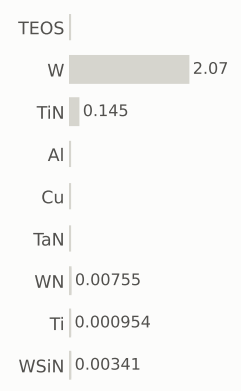

gases emitted (g)

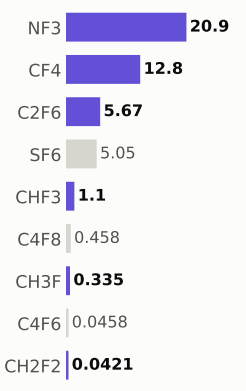

Step #18540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,020.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

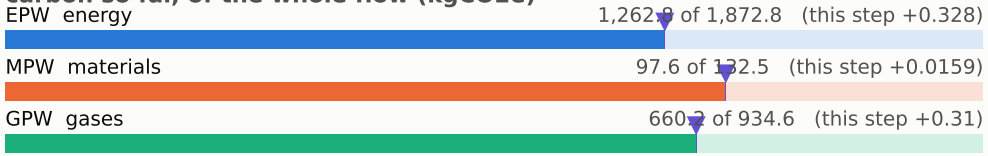

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

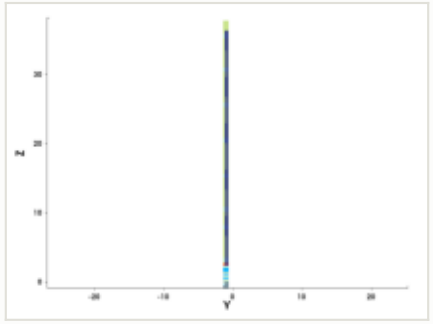

y cut at -1.035 µm

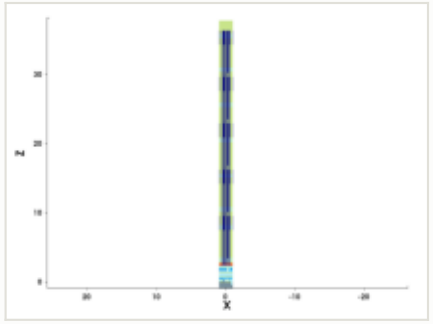

mask for this step

no mask for this step

steps by process area

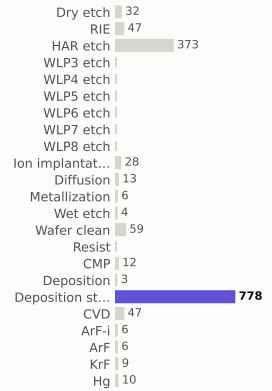

materials deposited (g)

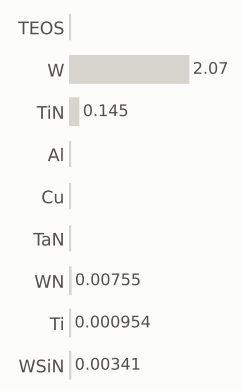

gases emitted (g)

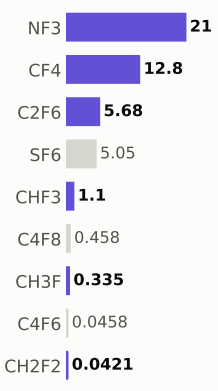

Step #18550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,021.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

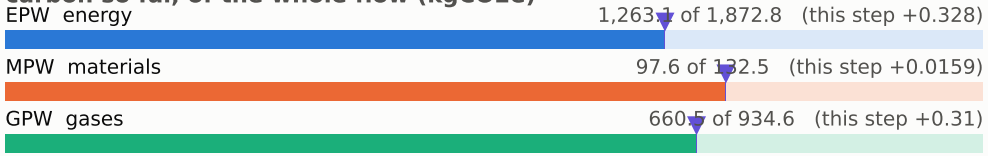

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

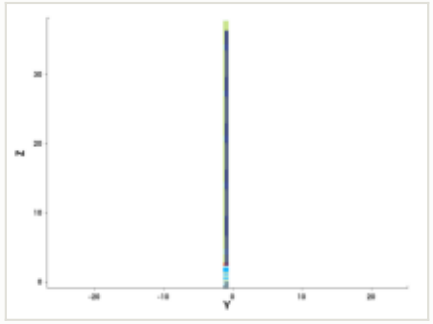

y cut at -1.035 µm

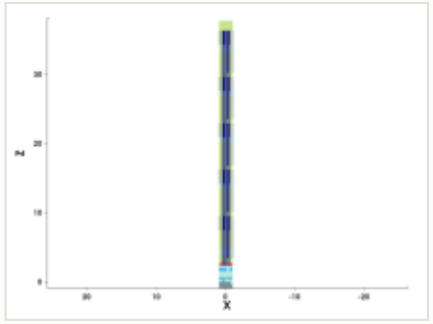

mask for this step

no mask for this step

steps by process area

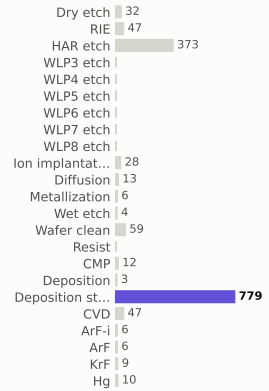

materials deposited (g)

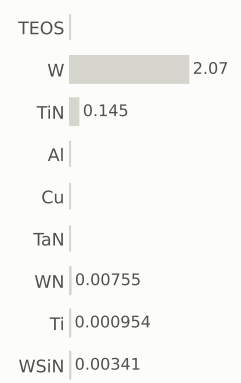

gases emitted (g)

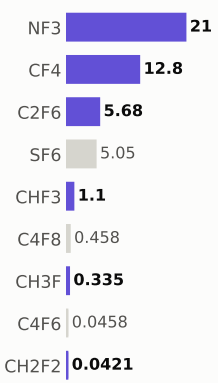

Step #18560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,021.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

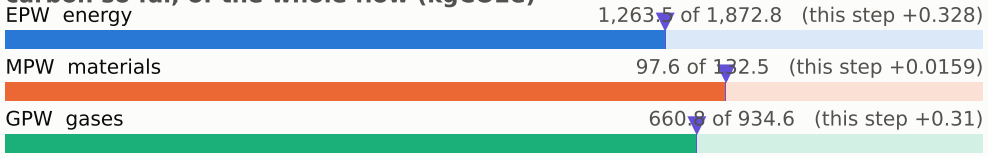

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

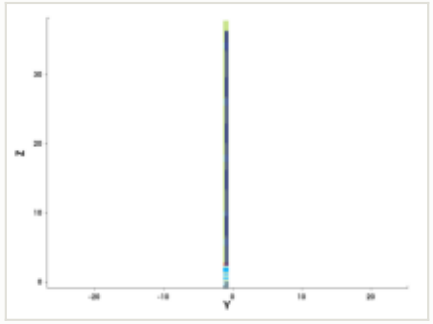

y cut at -1.035 µm

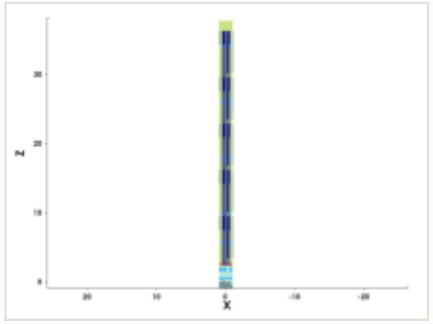

mask for this step

no mask for this step

steps by process area

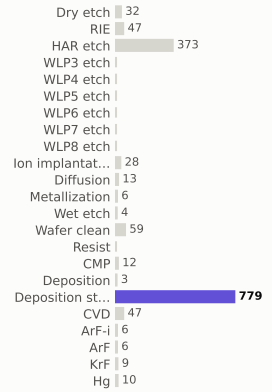

materials deposited (g)

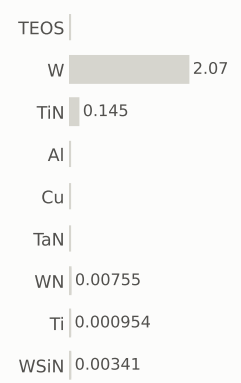

gases emitted (g)

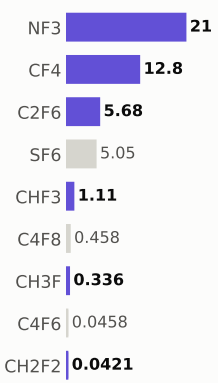

Step #18570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,022.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

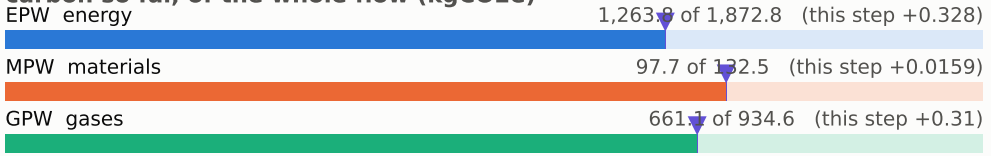

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

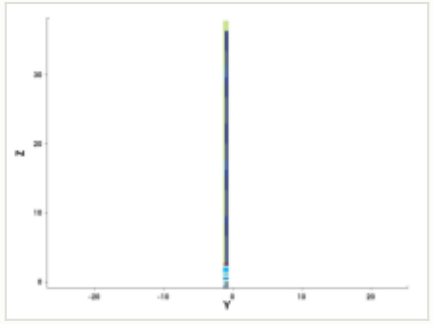

y cut at -1.035 µm

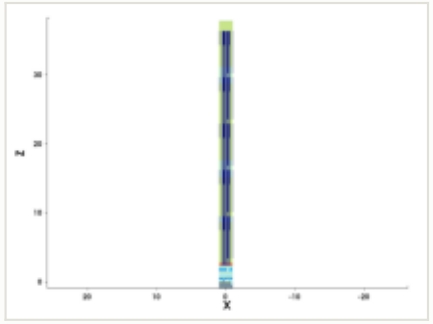

mask for this step

no mask for this step

steps by process area

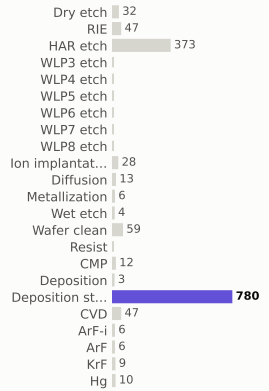

materials deposited (g)

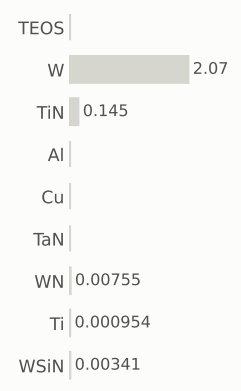

gases emitted (g)

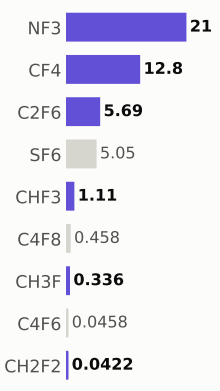

Step #18580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,023.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

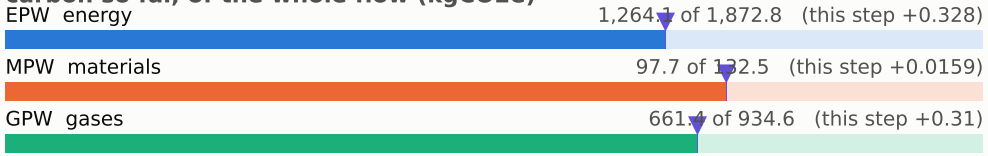

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

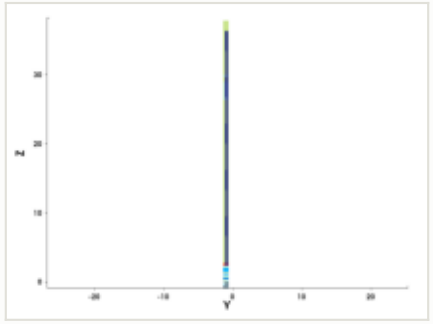

y cut at -1.035 µm

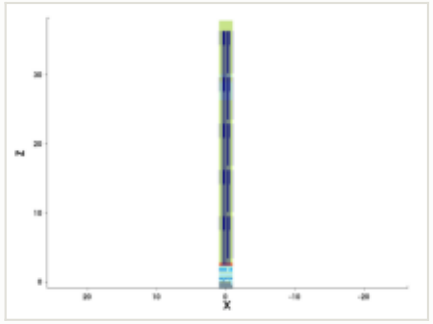

mask for this step

no mask for this step

steps by process area

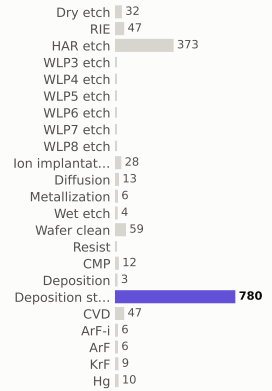

materials deposited (g)

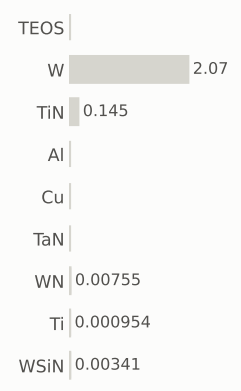

gases emitted (g)

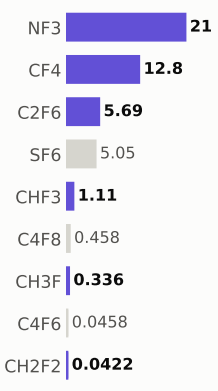

Step #18590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,023.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

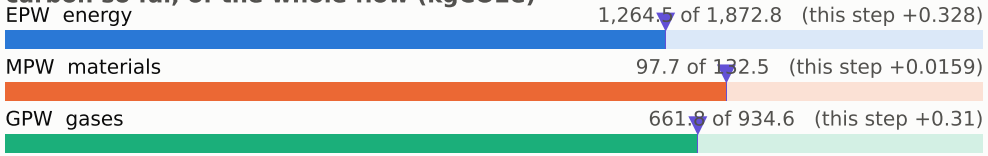

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

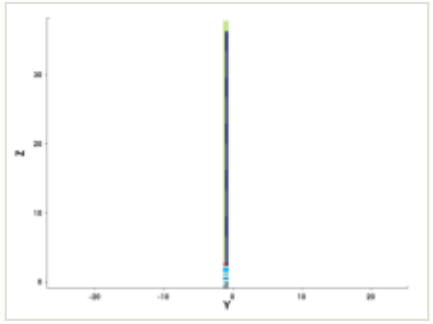

y cut at -1.035 µm

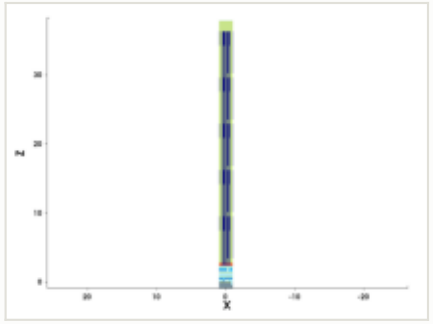

mask for this step

no mask for this step

steps by process area

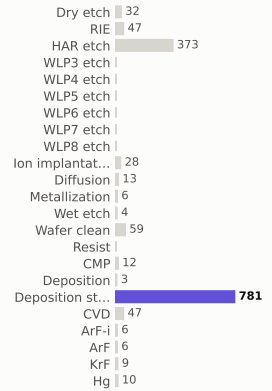

materials deposited (g)

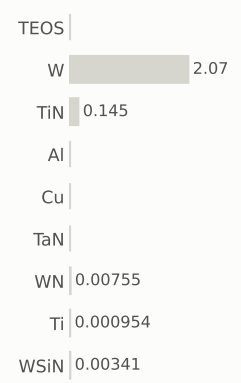

gases emitted (g)

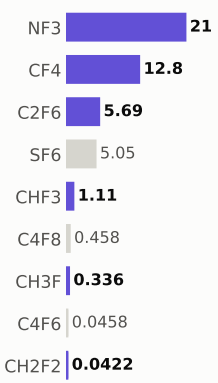

Step #18600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,024.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

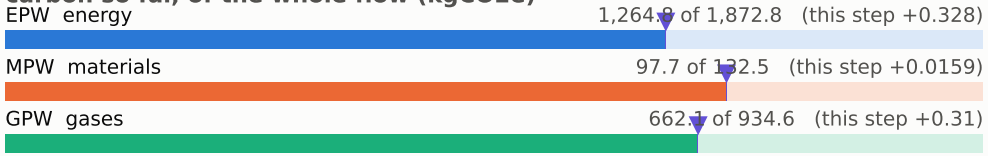

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

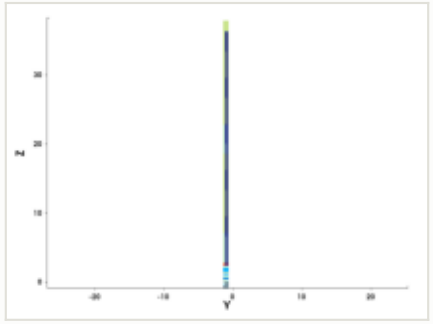

y cut at -1.035 µm

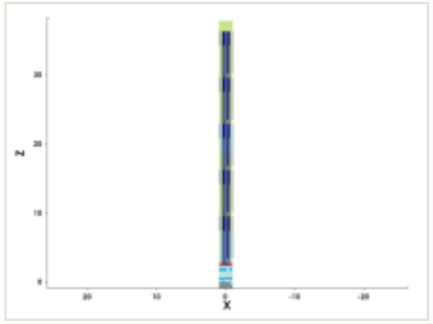

mask for this step

no mask for this step

steps by process area

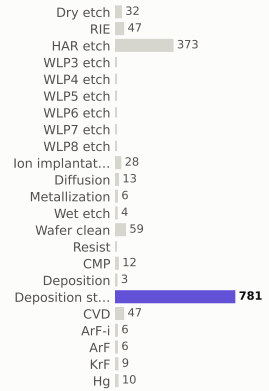

materials deposited (g)

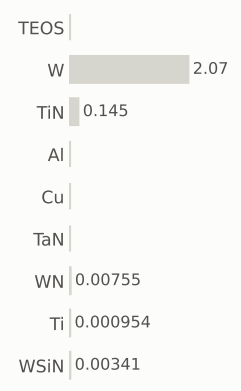

gases emitted (g)

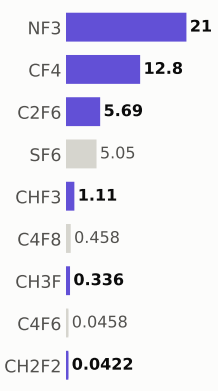

Step #18610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,025.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

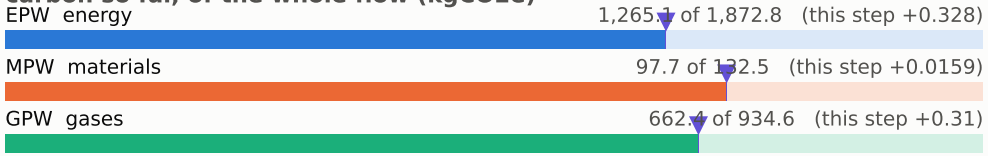

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

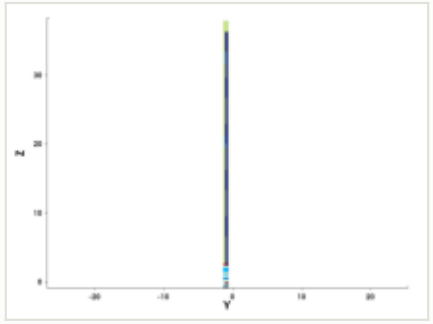

y cut at -1.035 µm

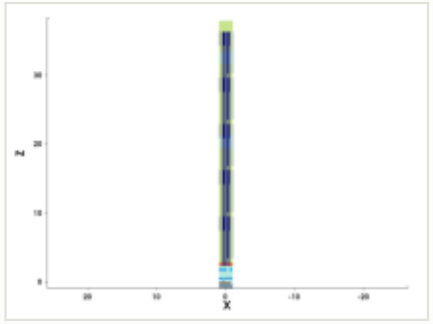

mask for this step

no mask for this step

steps by process area

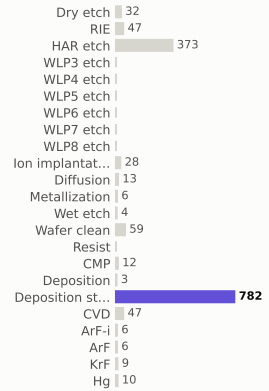

materials deposited (g)

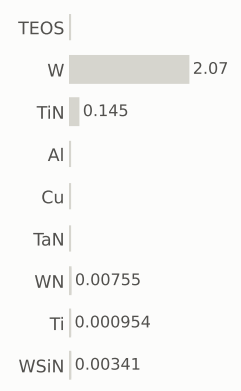

gases emitted (g)

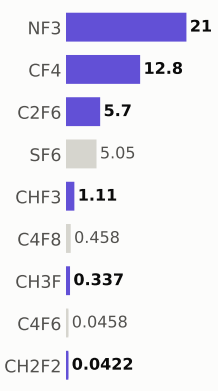

Step #18620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,025.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

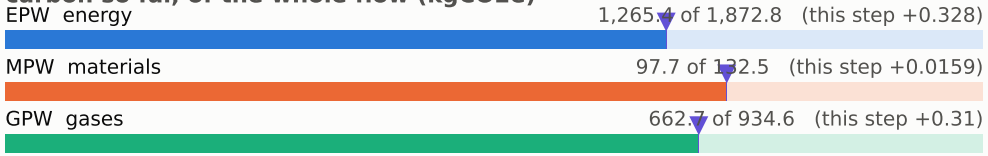

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

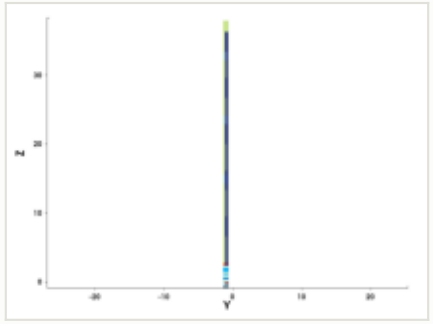

y cut at -1.035 µm

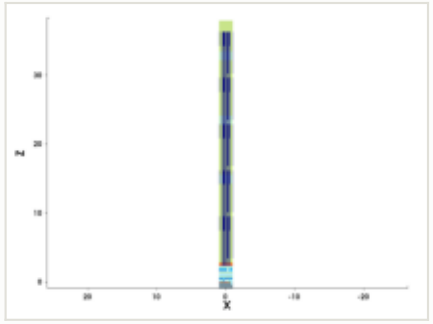

mask for this step

no mask for this step

steps by process area

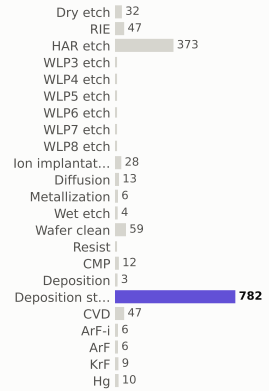

materials deposited (g)

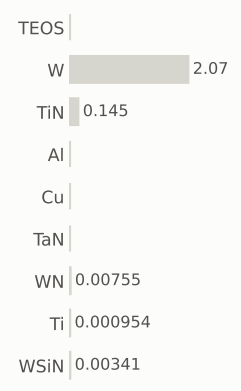

gases emitted (g)

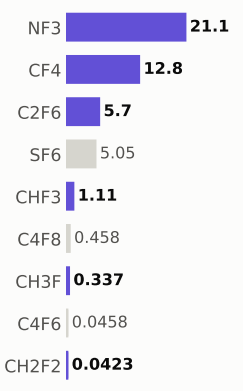

Step #18630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,026.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

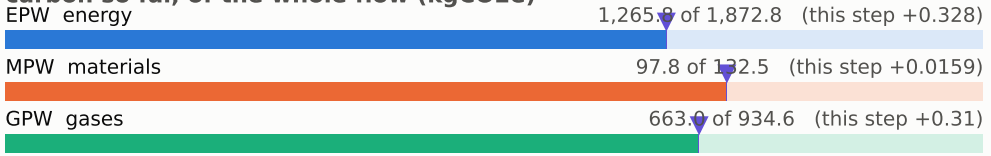

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

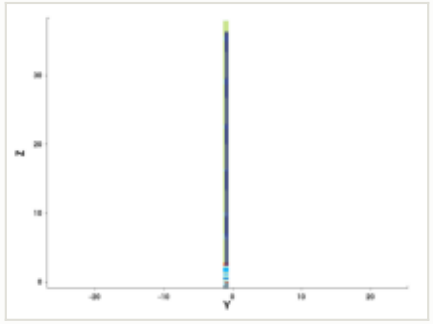

y cut at -1.035 µm

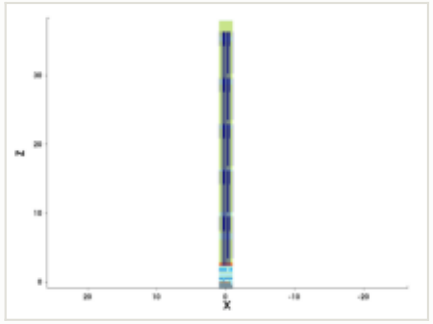

mask for this step

no mask for this step

steps by process area

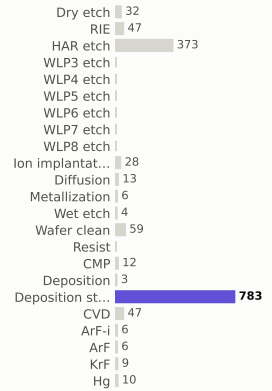

materials deposited (g)

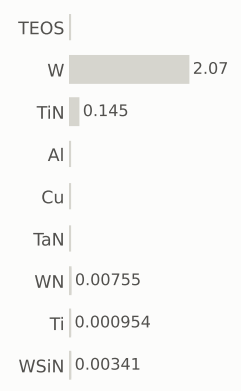

gases emitted (g)

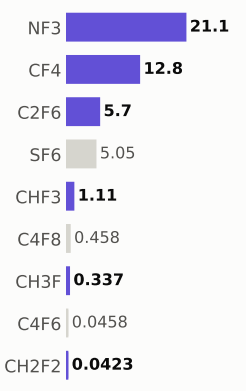

Step #18640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,027.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

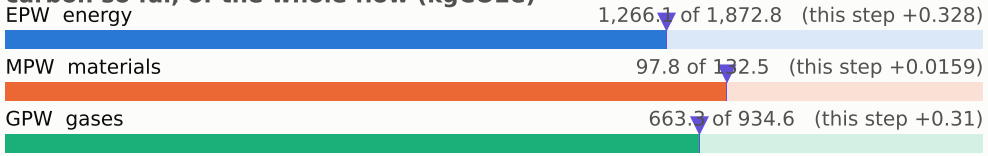

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

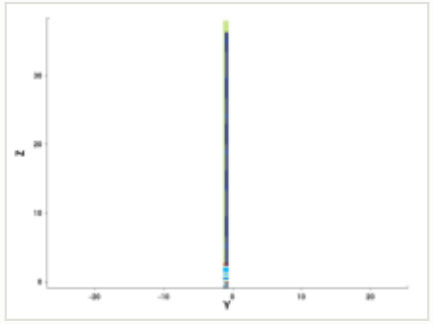

y cut at -1.035 µm

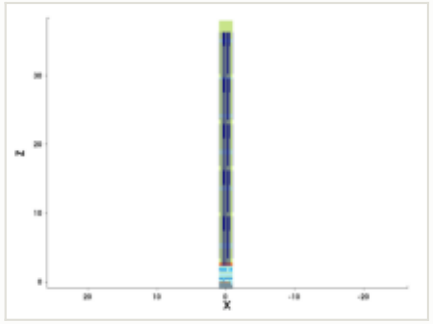

mask for this step

no mask for this step

steps by process area

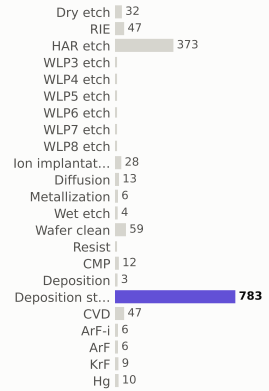

materials deposited (g)

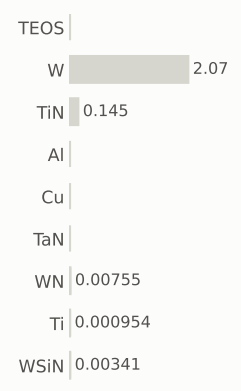

gases emitted (g)

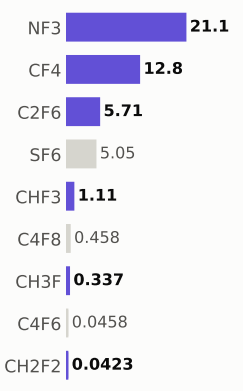

Step #18650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,027.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

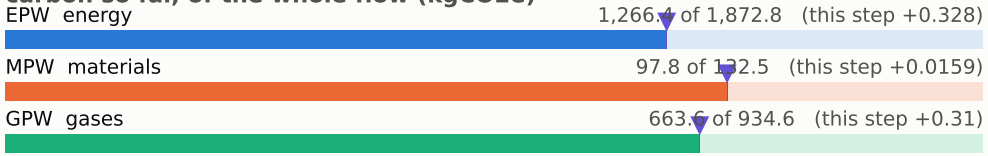

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

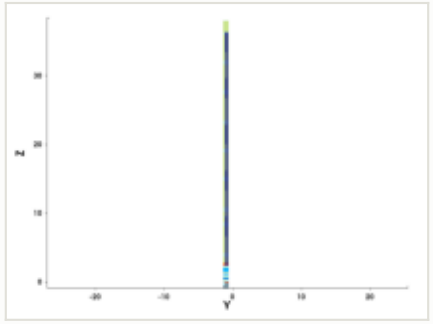

y cut at -1.035 µm

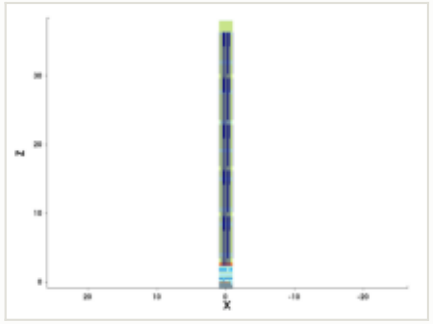

mask for this step

no mask for this step

steps by process area

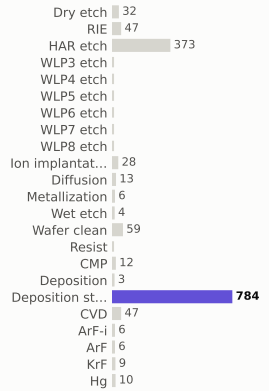

materials deposited (g)

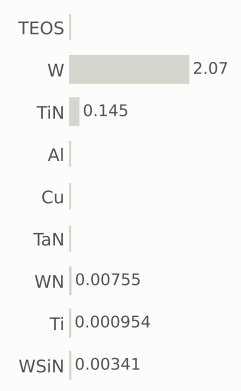

gases emitted (g)

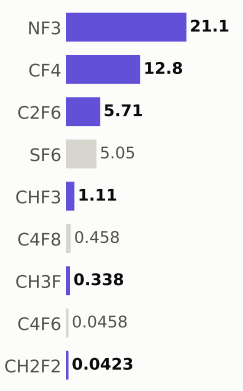

Step #18660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,028.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

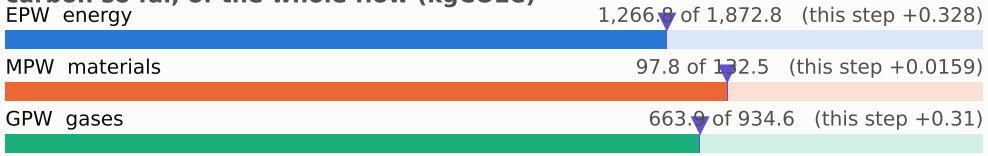

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

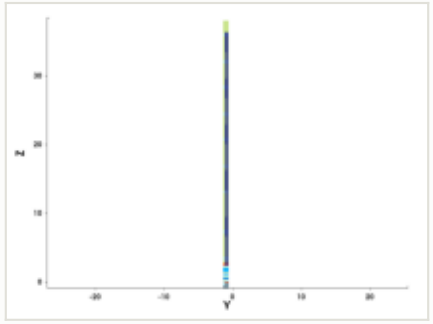

y cut at -1.035 µm

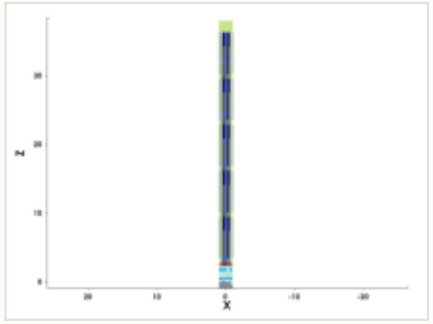

mask for this step

no mask for this step

steps by process area

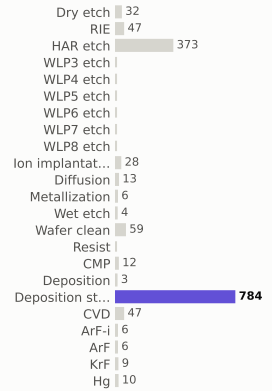

materials deposited (g)

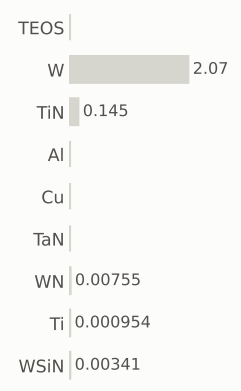

gases emitted (g)

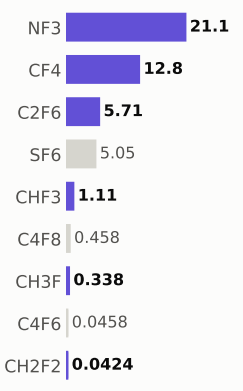

Step #18670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,029.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

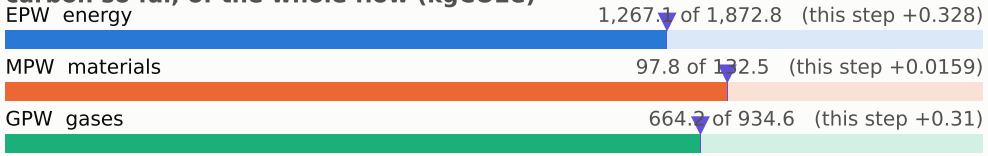

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

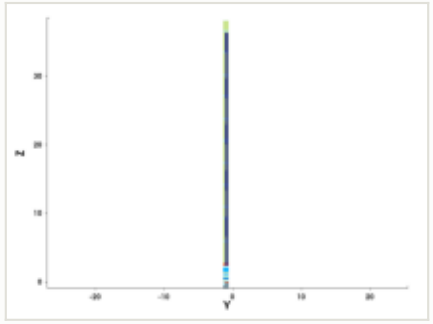

y cut at -1.035 µm

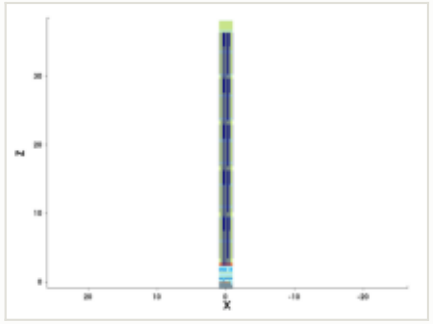

mask for this step

no mask for this step

steps by process area

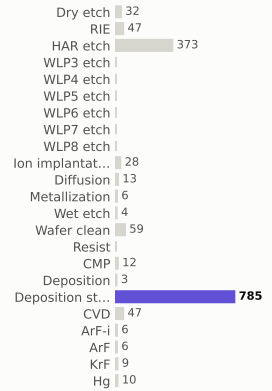

materials deposited (g)

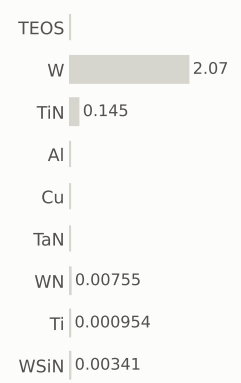

gases emitted (g)

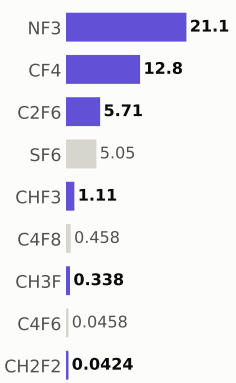

Step #18680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,029.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

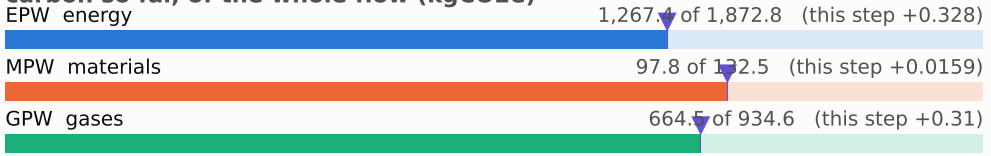

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

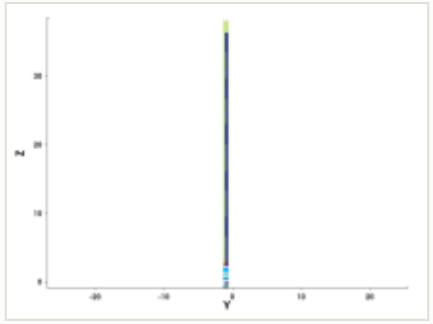

y cut at -1.035 µm

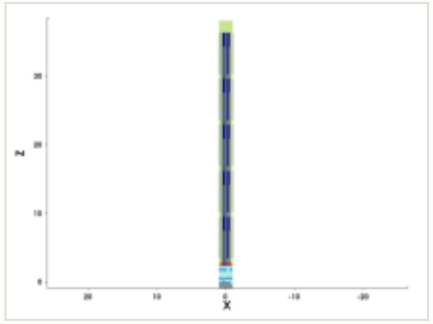

mask for this step

no mask for this step

steps by process area

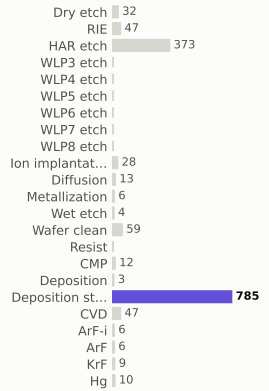

materials deposited (g)

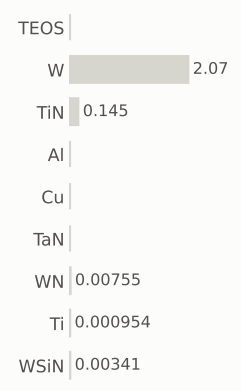

gases emitted (g)

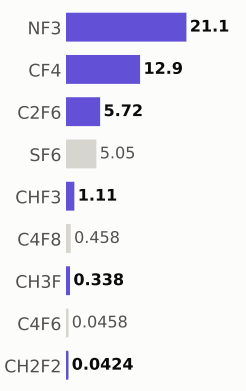

Step #18690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,030.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

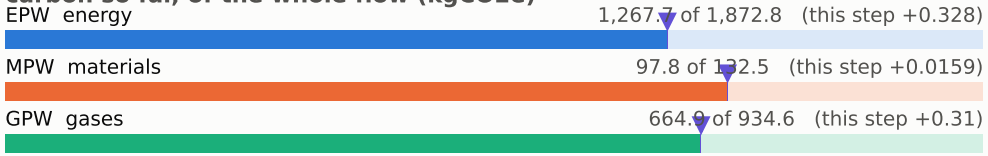

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

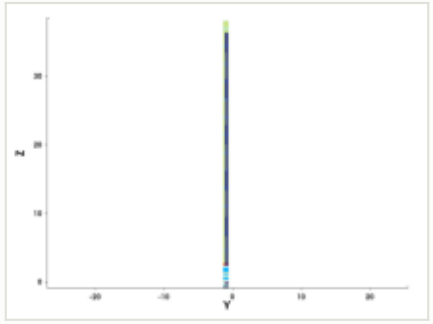

y cut at -1.035 µm

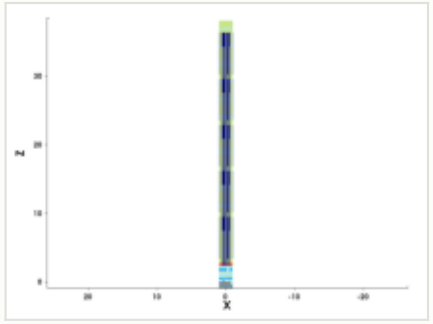

mask for this step

no mask for this step

steps by process area

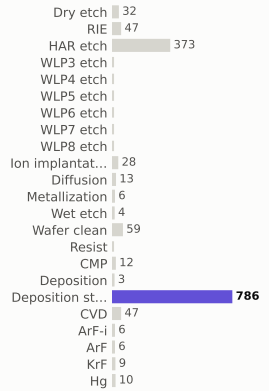

materials deposited (g)

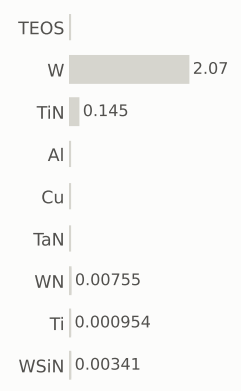

gases emitted (g)

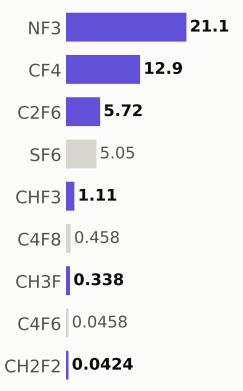

Step #18700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,031.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

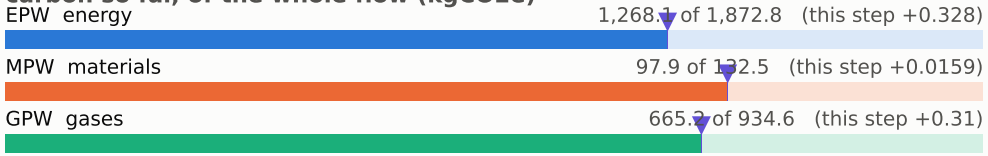

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

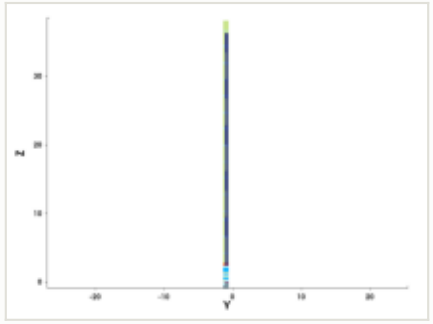

y cut at -1.035 µm

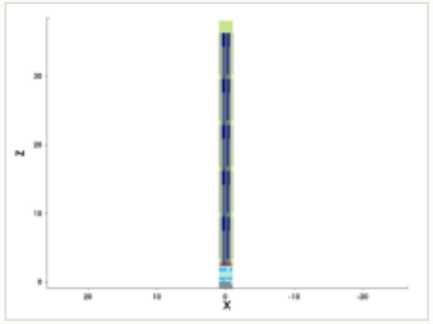

mask for this step

no mask for this step

steps by process area

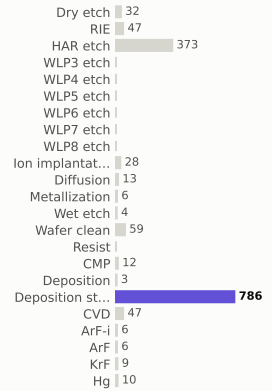

materials deposited (g)

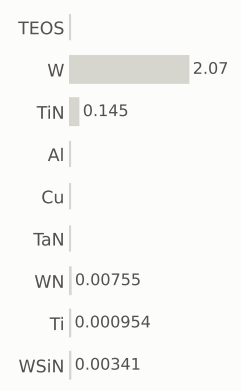

gases emitted (g)

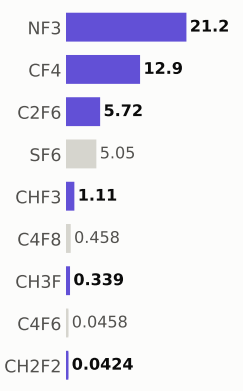

Step #18710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,031.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

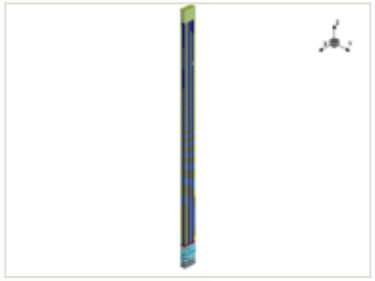

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

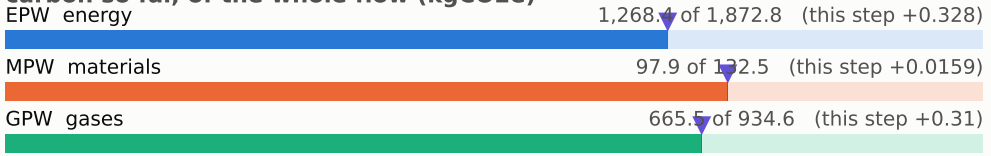

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

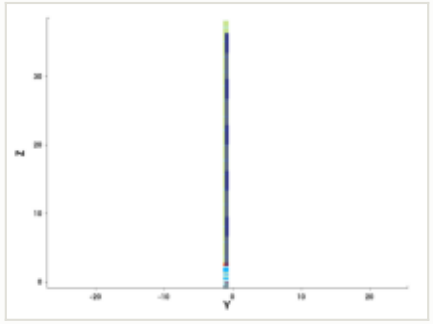

y cut at -1.035 µm

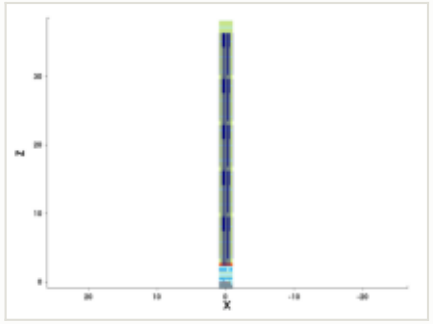

mask for this step

no mask for this step

steps by process area

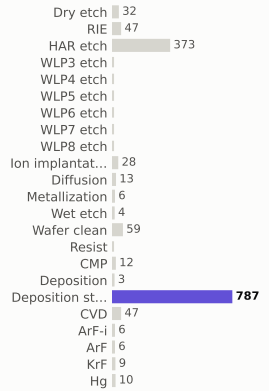

materials deposited (g)

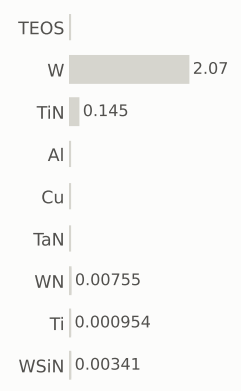

gases emitted (g)

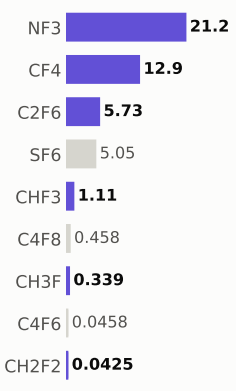

Step #18720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,032.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

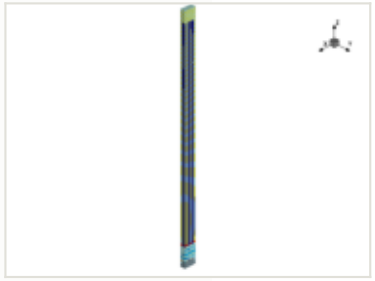

x cut at 0.000 µm

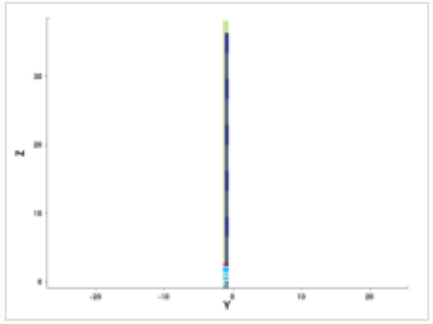

y cut at -1.035 µm

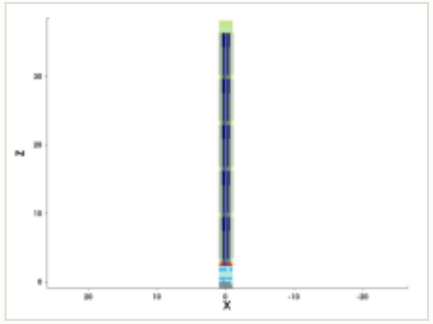

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

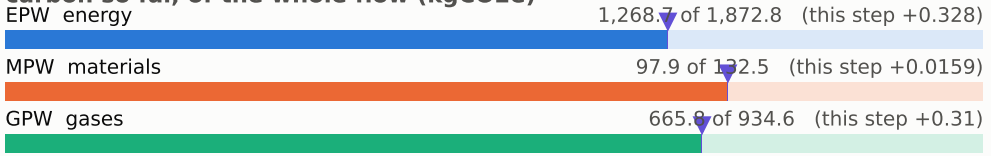

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

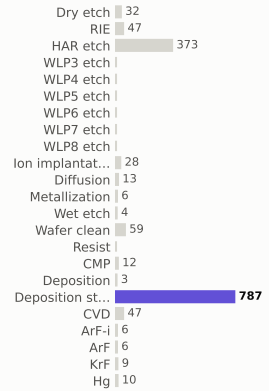

materials deposited (g)

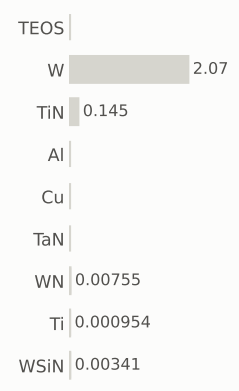

gases emitted (g)

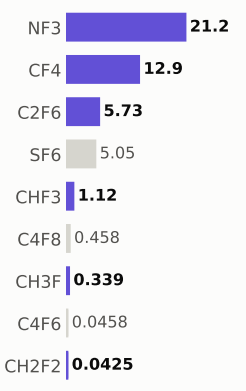

Step #18730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,033.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

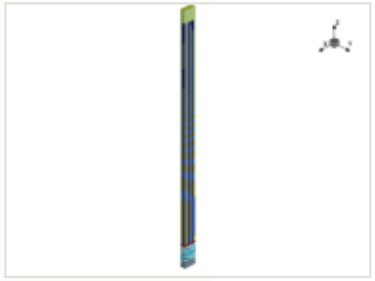

x cut at 0.000 µm

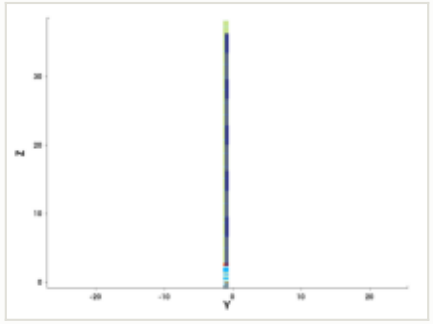

y cut at -1.035 µm

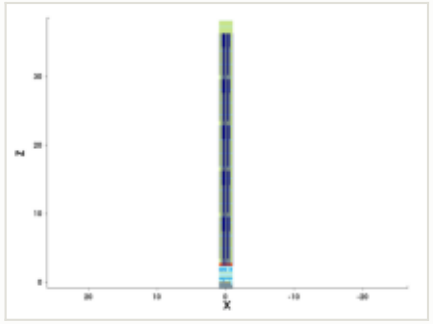

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

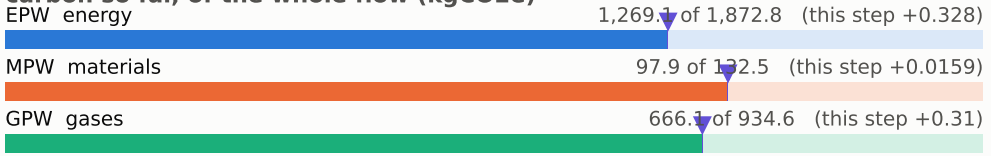

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

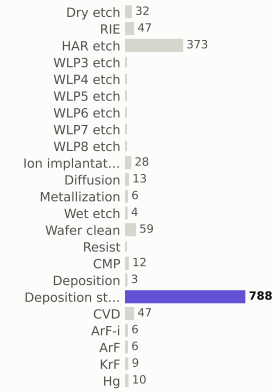

materials deposited (g)

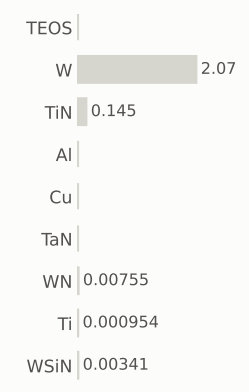

gases emitted (g)

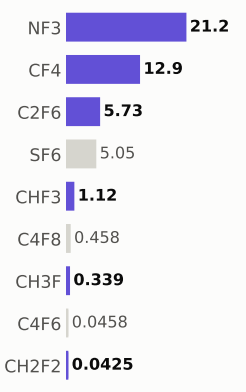

Step #18740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,033.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

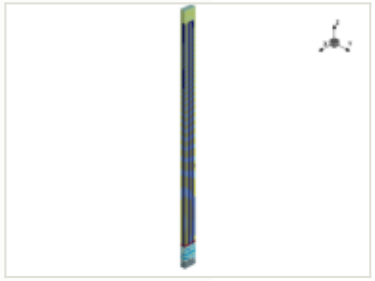

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

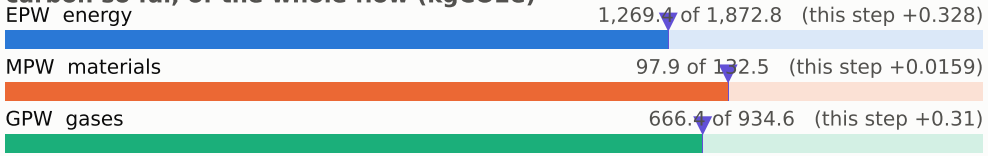

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

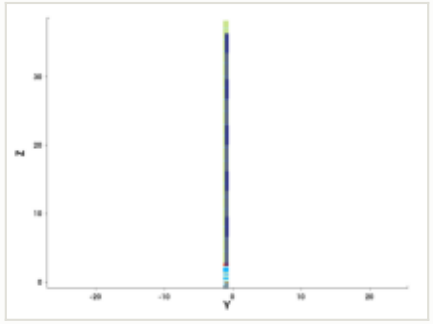

y cut at -1.035 µm

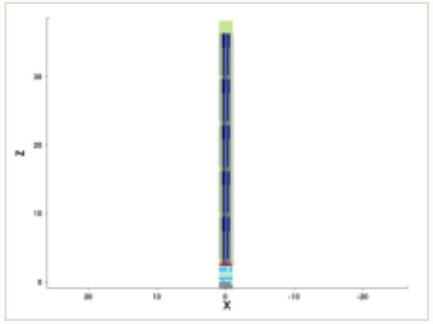

mask for this step

no mask for this step

steps by process area

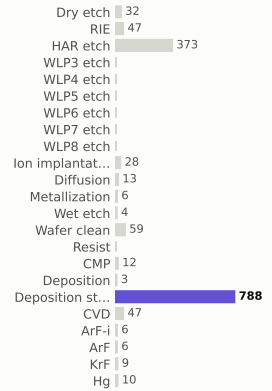

materials deposited (g)

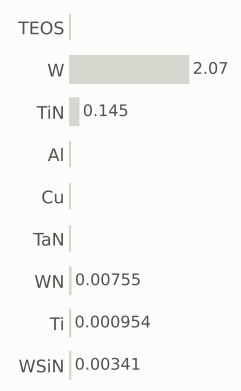

gases emitted (g)

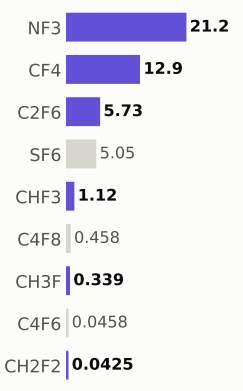

Step #18750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,034.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

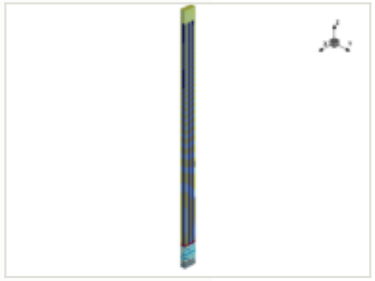

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

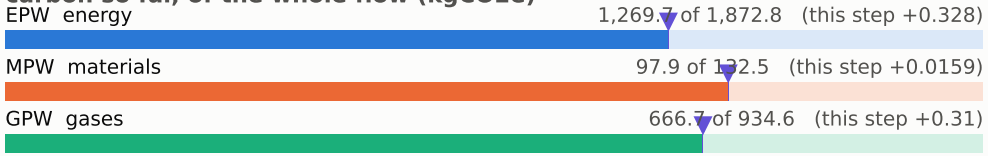

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

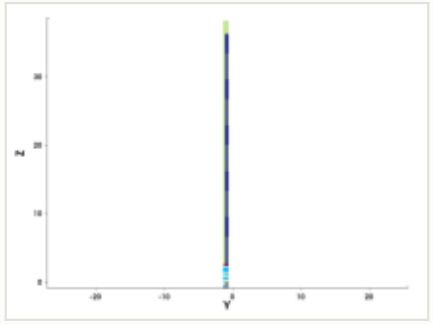

y cut at -1.035 µm

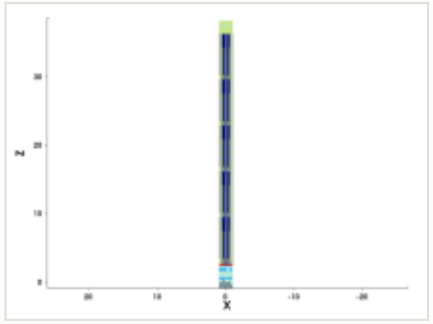

mask for this step

no mask for this step

steps by process area

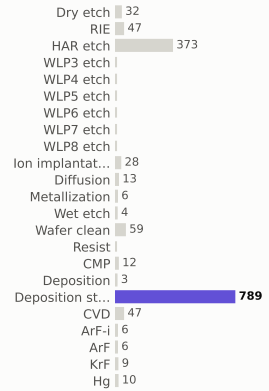

materials deposited (g)

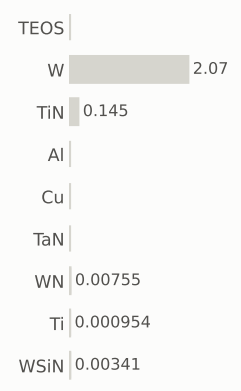

gases emitted (g)

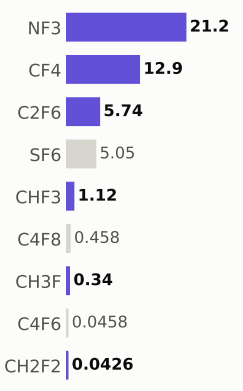

Step #18760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,035.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

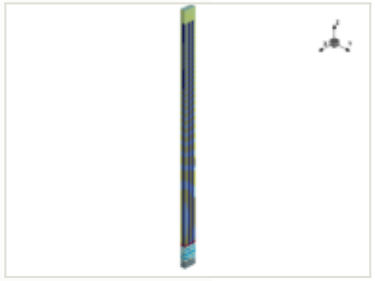

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

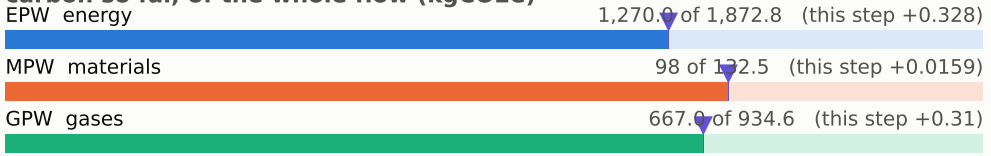

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

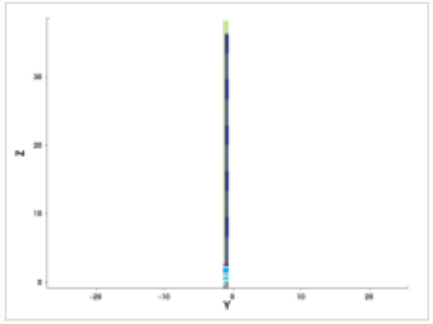

y cut at -1.035 µm

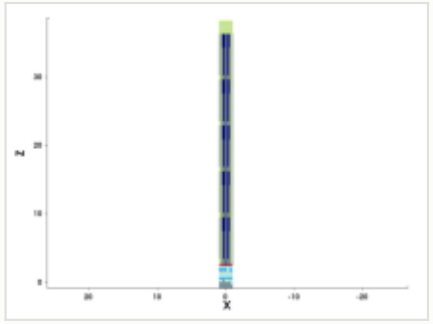

mask for this step

no mask for this step

steps by process area

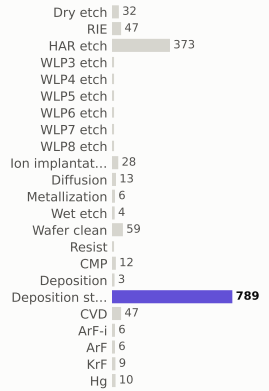

materials deposited (g)

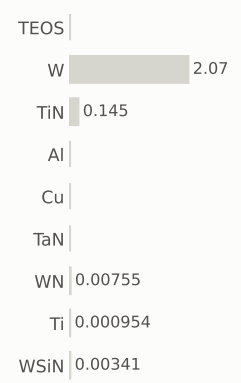

gases emitted (g)

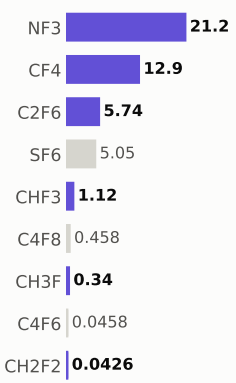

Step #18770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,035.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

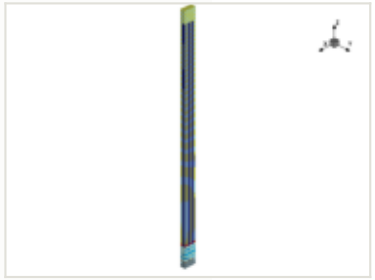

x cut at 0.000 µm

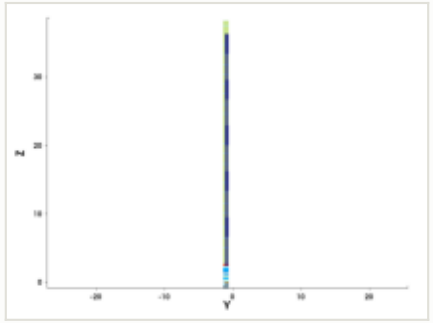

y cut at -1.035 µm

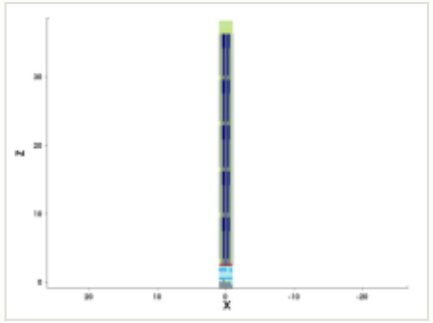

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

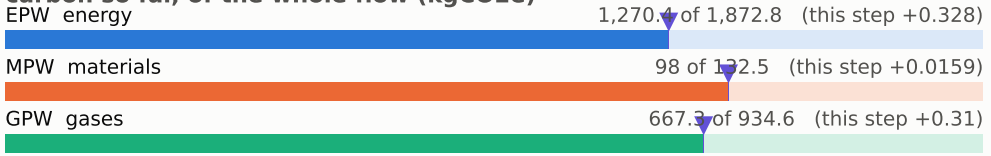

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

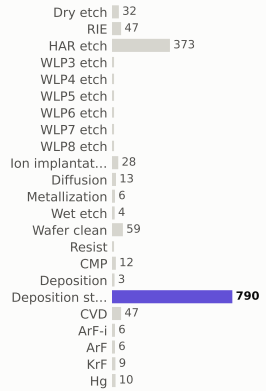

materials deposited (g)

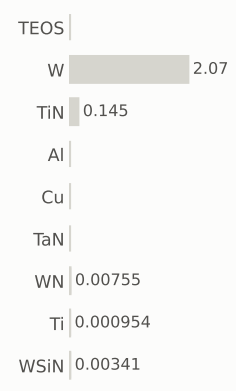

gases emitted (g)

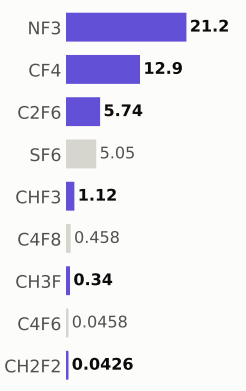

Step #18780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,036.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

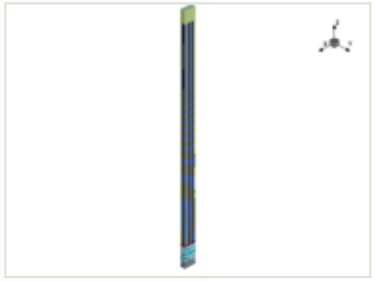

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

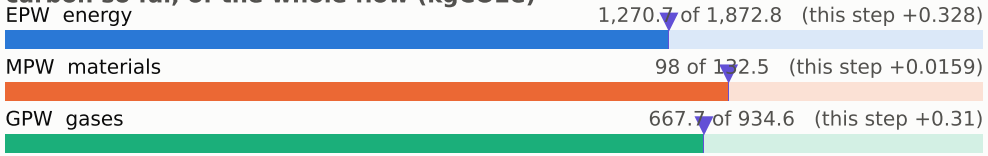

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

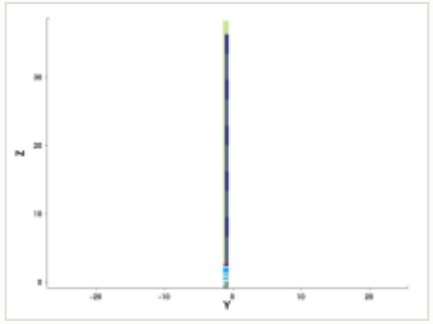

y cut at -1.035 µm

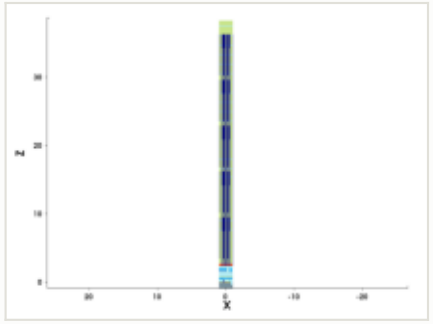

mask for this step

no mask for this step

steps by process area

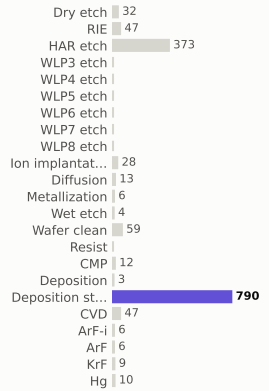

materials deposited (g)

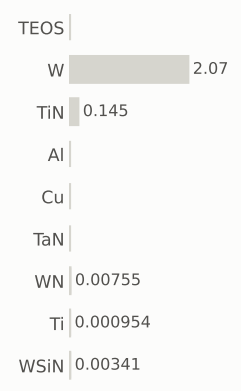

gases emitted (g)

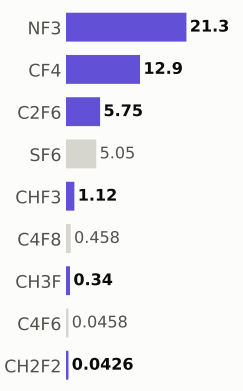

Step #18790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,037.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

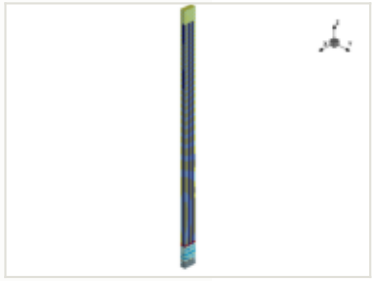

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

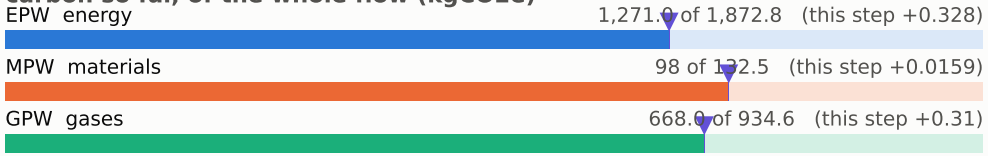

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

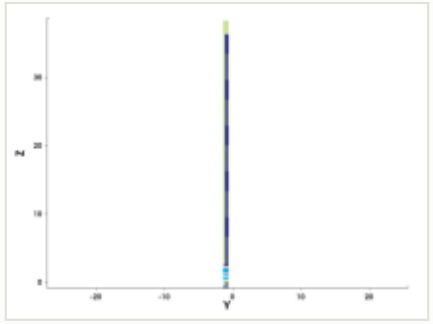

y cut at -1.035 µm

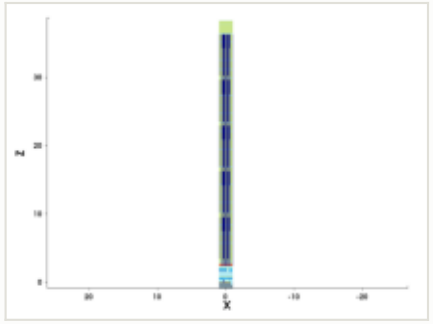

mask for this step

no mask for this step

steps by process area

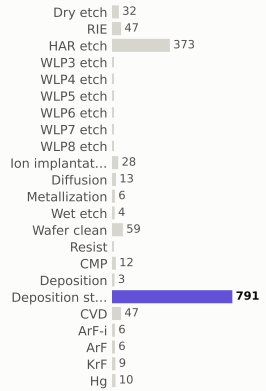

materials deposited (g)

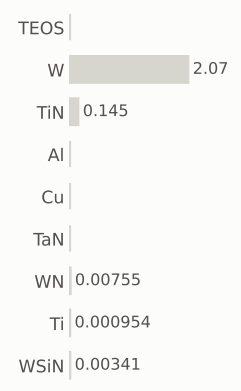

gases emitted (g)

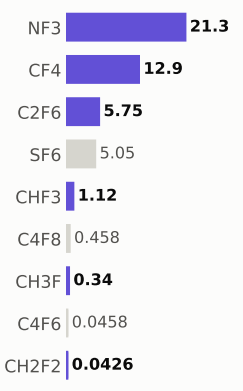

Step #18800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,037.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

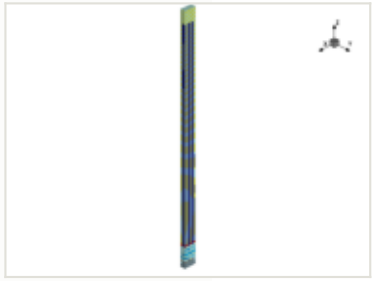

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

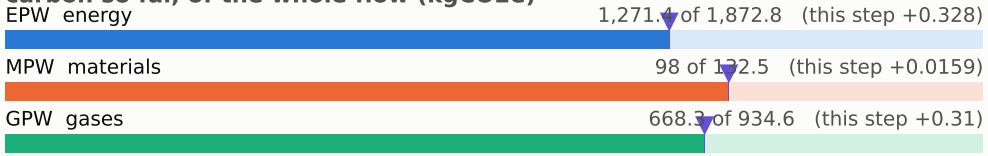

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

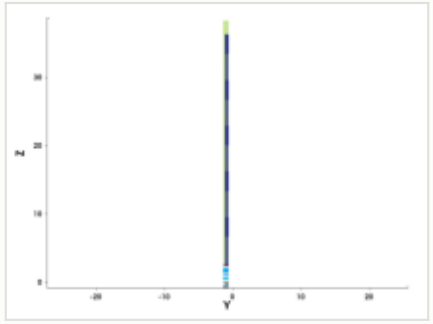

y cut at -1.035 µm

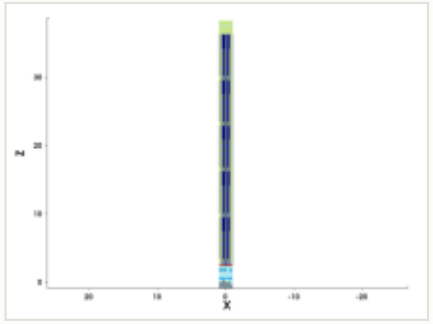

mask for this step

no mask for this step

steps by process area

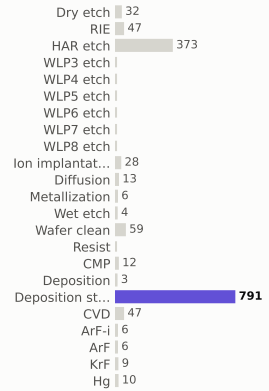

materials deposited (g)

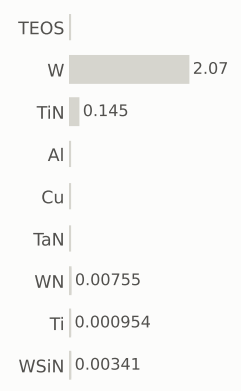

gases emitted (g)

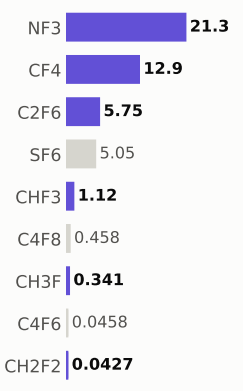

Step #18810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,038.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

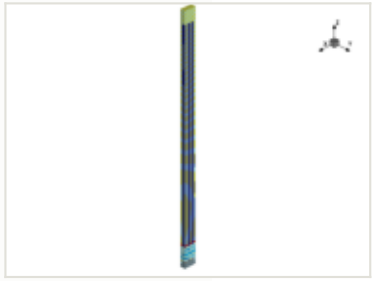

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

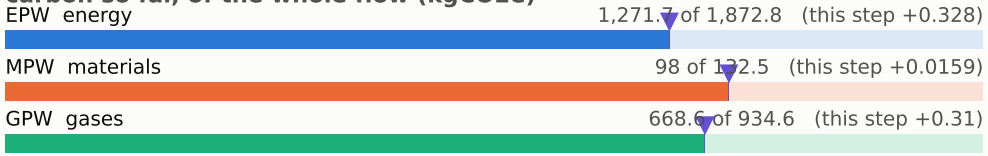

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

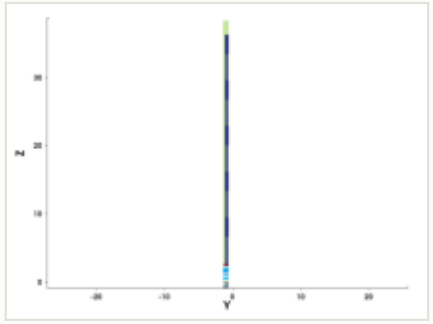

y cut at -1.035 µm

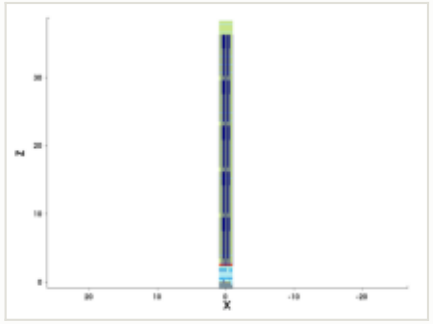

mask for this step

no mask for this step

steps by process area

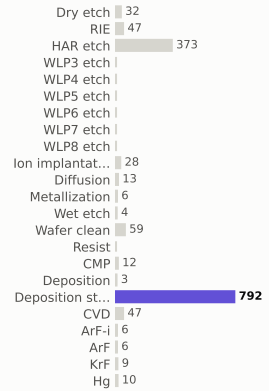

materials deposited (g)

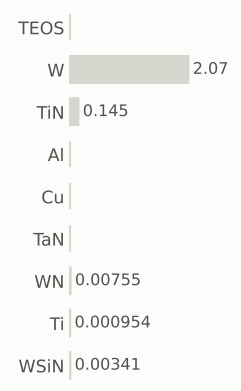

gases emitted (g)

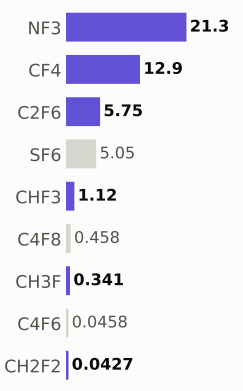

Step #18820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,039.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

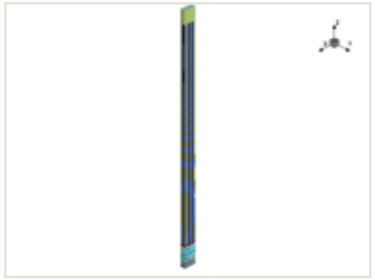

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

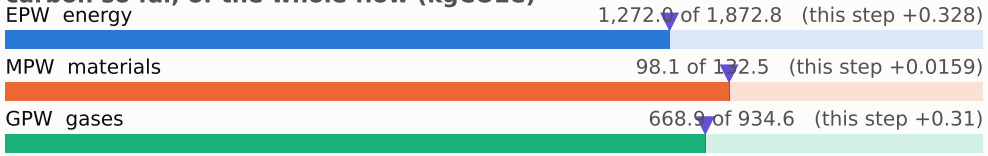

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

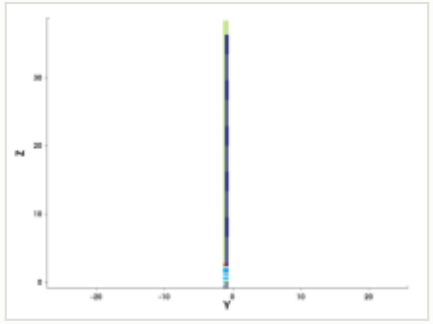

y cut at -1.035 µm

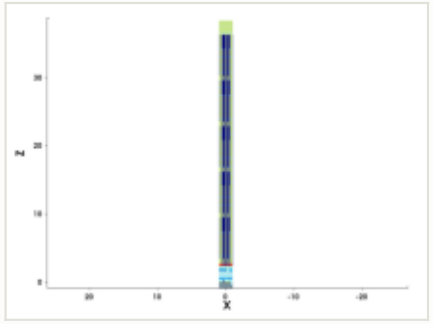

mask for this step

no mask for this step

steps by process area

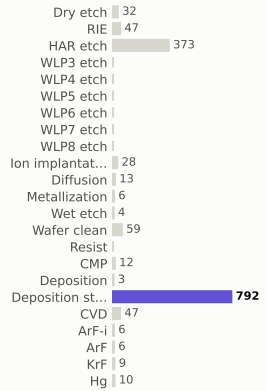

materials deposited (g)

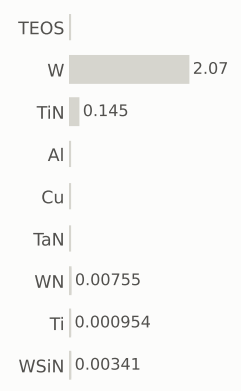

gases emitted (g)

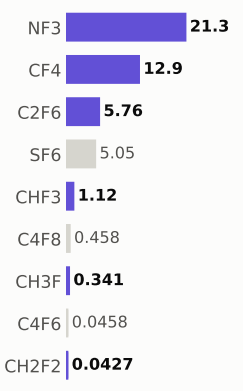

Step #18830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,039.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

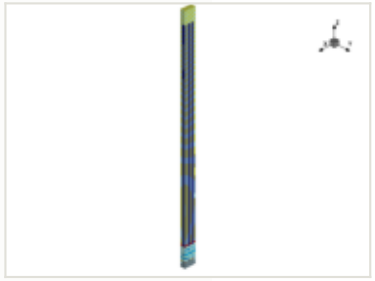

x cut at 0.000 µm

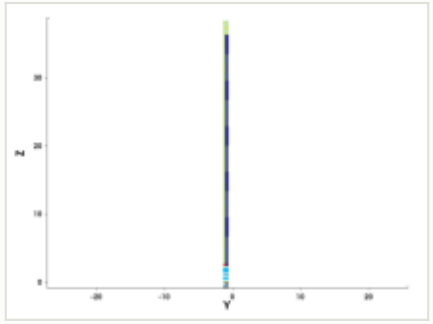

y cut at -1.035 µm

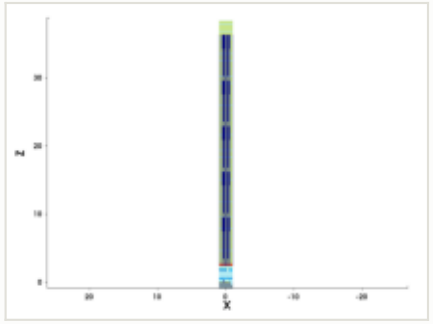

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

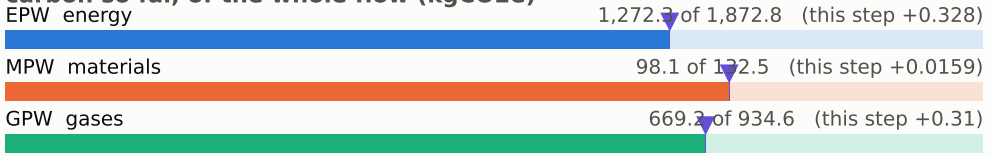

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

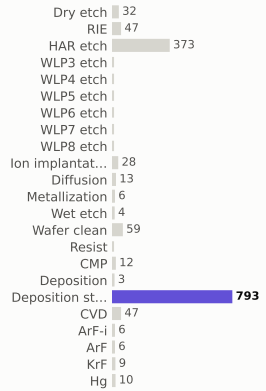

materials deposited (g)

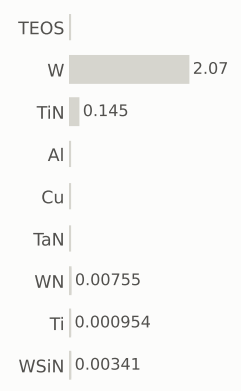

gases emitted (g)

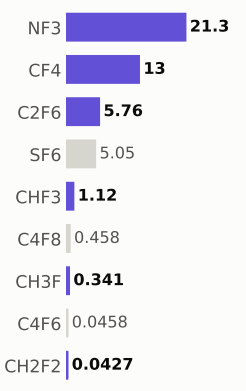

Step #18840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,040.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

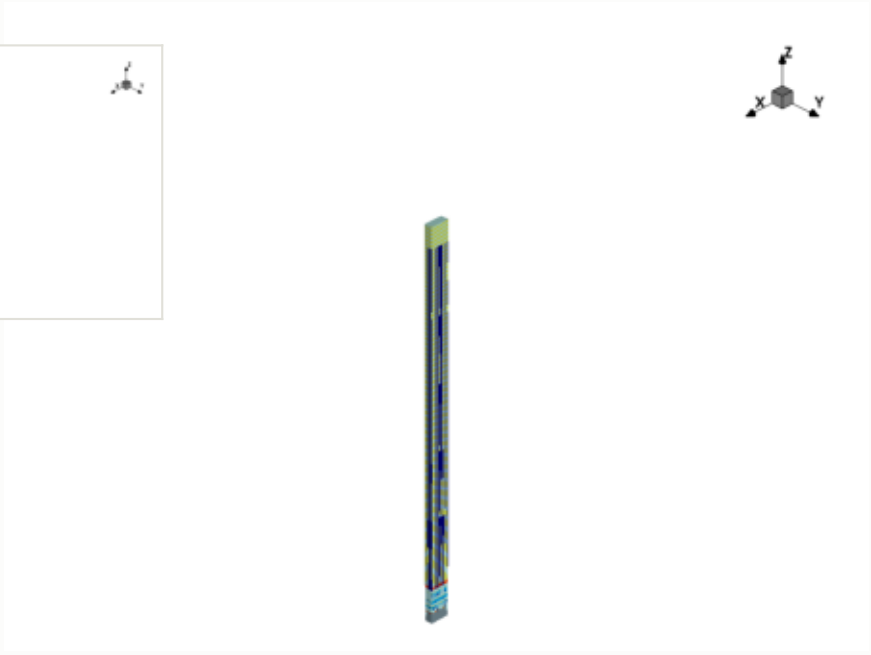

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

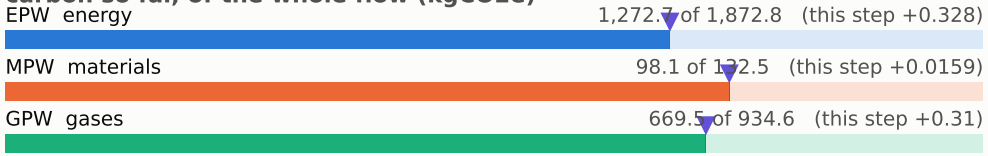

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

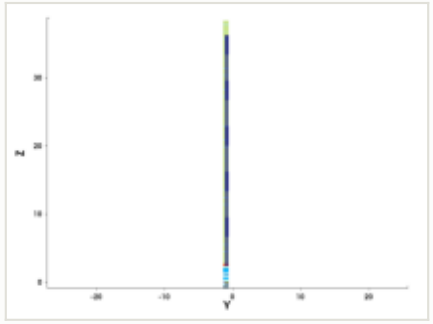

y cut at -1.035 µm

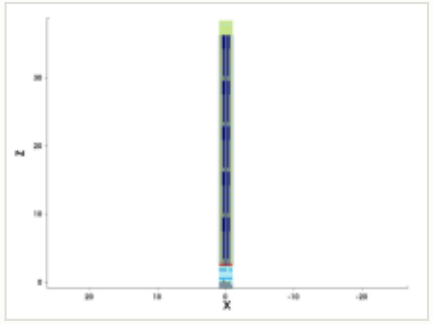

mask for this step

no mask for this step

steps by process area

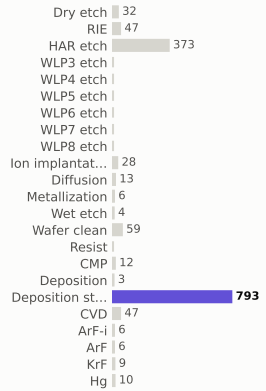

materials deposited (g)

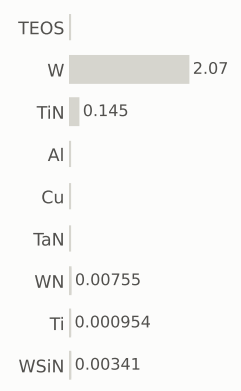

gases emitted (g)

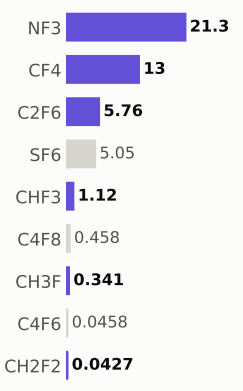

Step #18850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,040.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

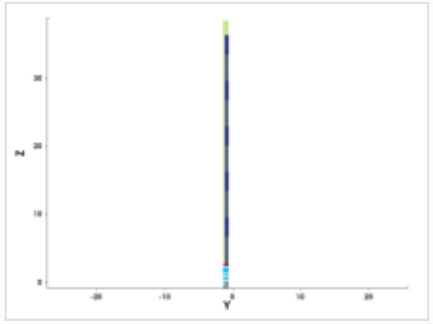

y cut at -1.035 µm

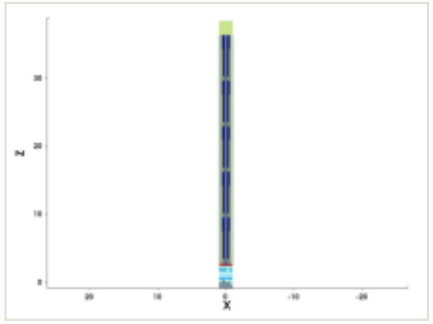

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

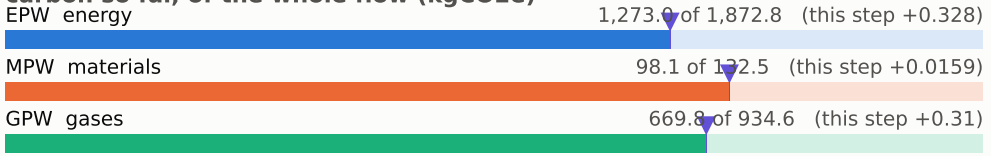

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

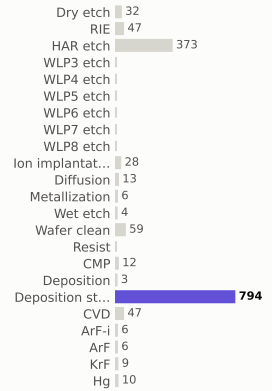

materials deposited (g)

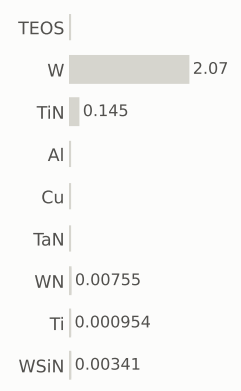

gases emitted (g)

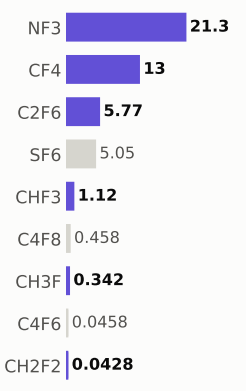

Step #18860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,041.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

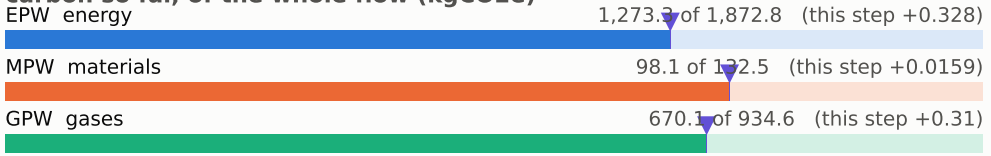

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

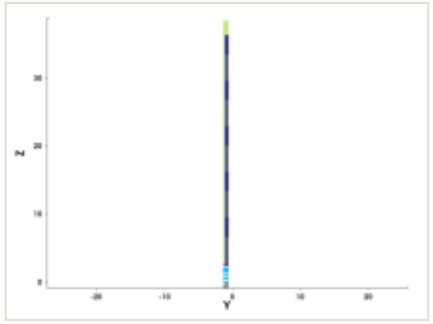

y cut at -1.035 µm

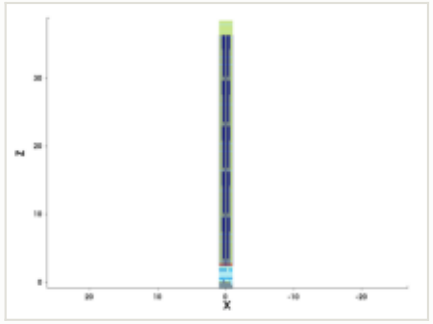

mask for this step

no mask for this step

steps by process area

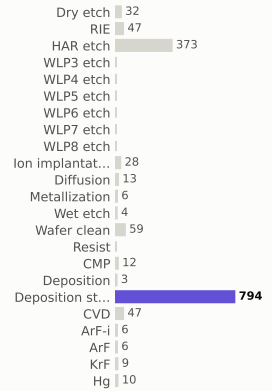

materials deposited (g)

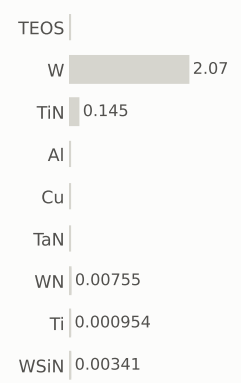

gases emitted (g)

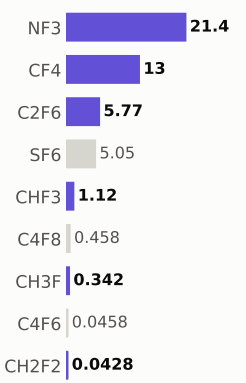

Step #18870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,042.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

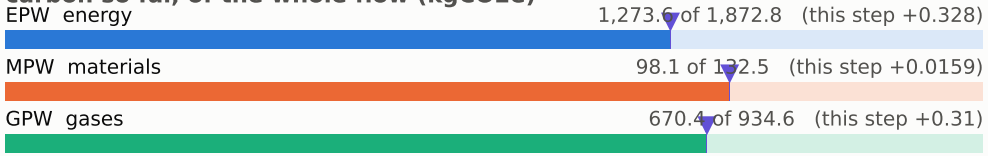

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

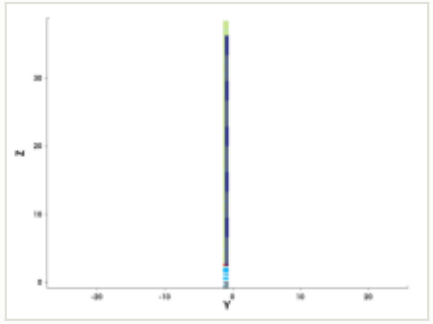

y cut at -1.035 µm

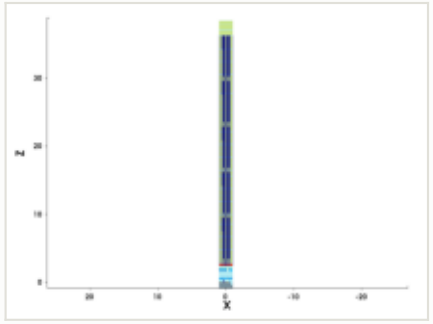

mask for this step

no mask for this step

steps by process area

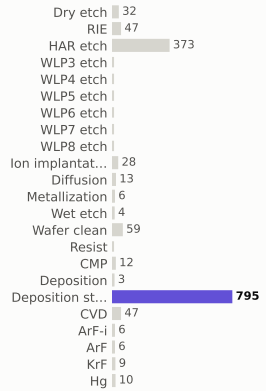

materials deposited (g)

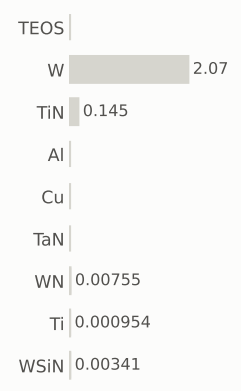

gases emitted (g)

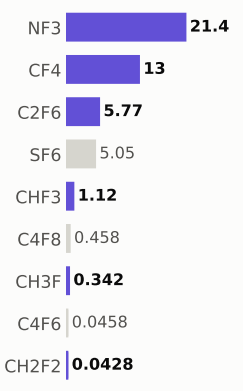

Step #18880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,042.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

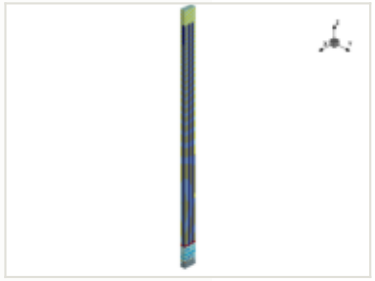

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

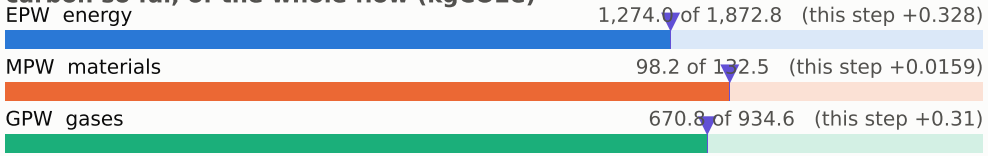

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

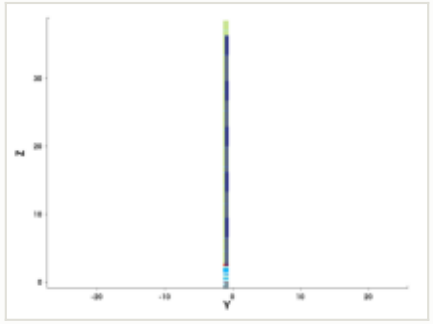

y cut at -1.035 µm

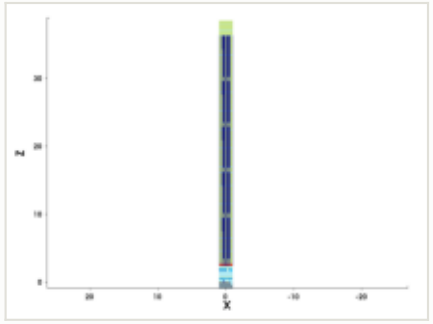

mask for this step

no mask for this step

steps by process area

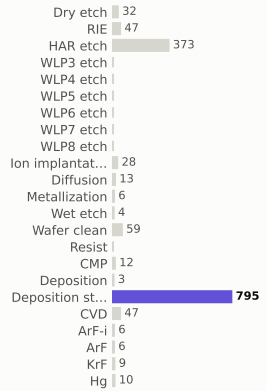

materials deposited (g)

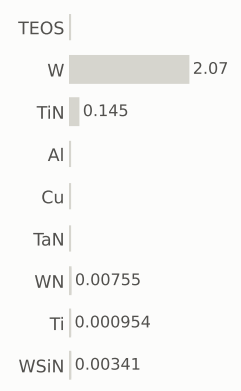

gases emitted (g)

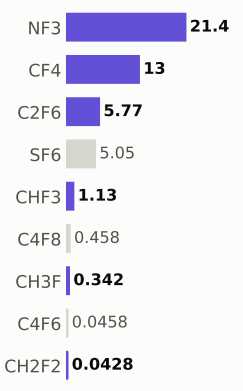

Step #18890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,043.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

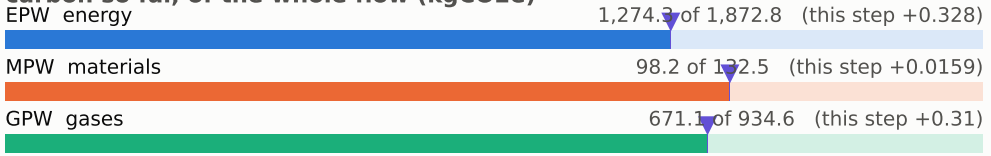

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

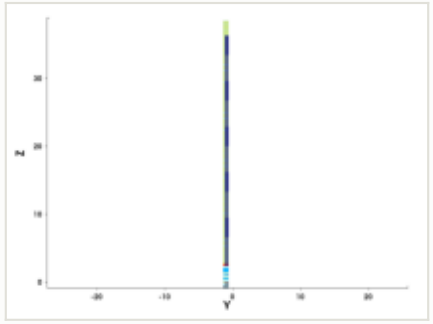

y cut at -1.035 µm

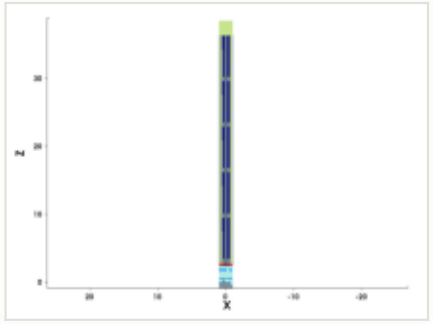

mask for this step

no mask for this step

steps by process area

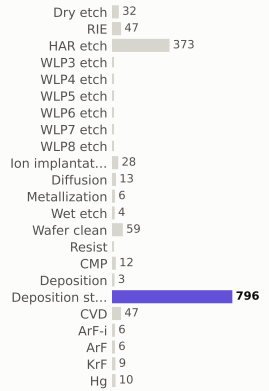

materials deposited (g)

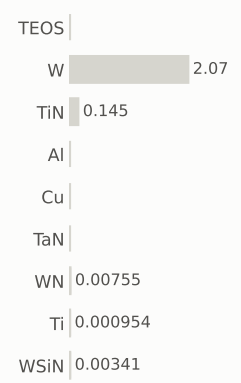

gases emitted (g)

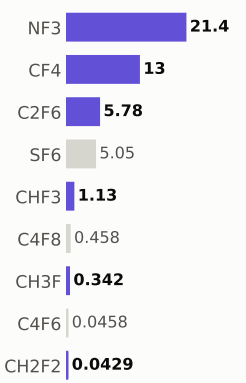

Step #18900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,044.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

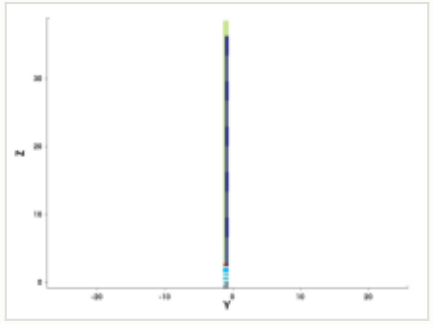

y cut at -1.035 µm

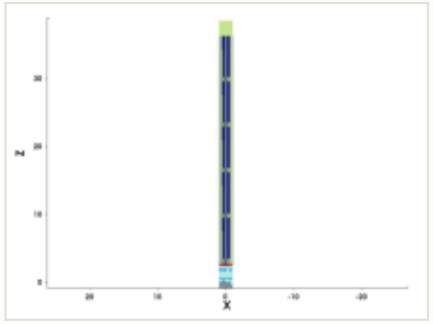

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

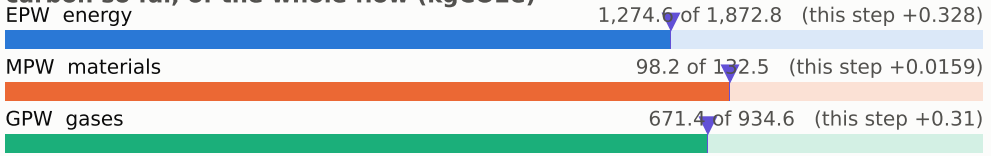

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

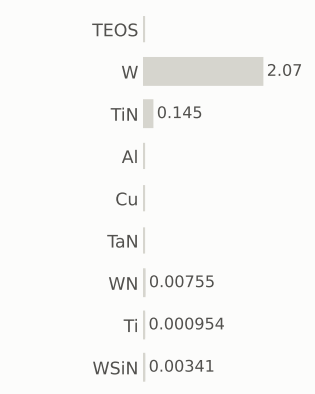

gases emitted (g)

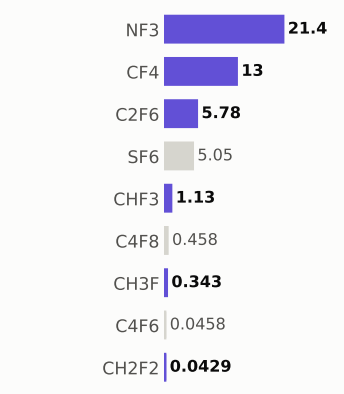

Step #18910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,044.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

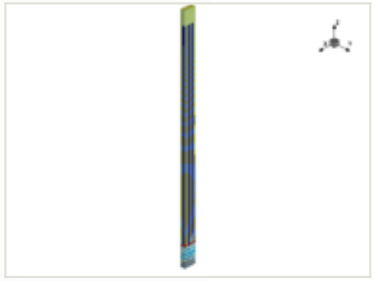

x cut at 0.000 µm

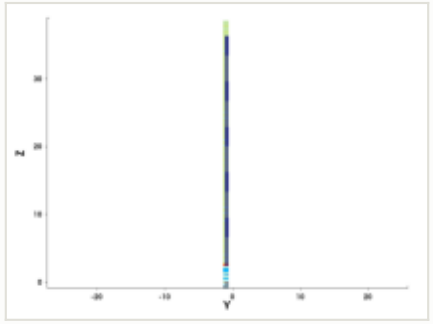

y cut at -1.035 µm

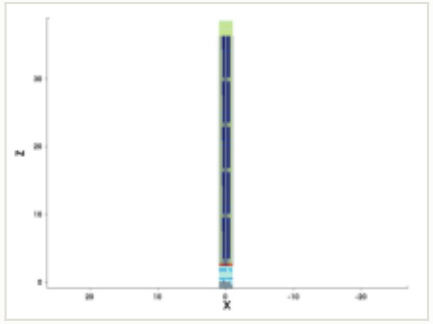

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

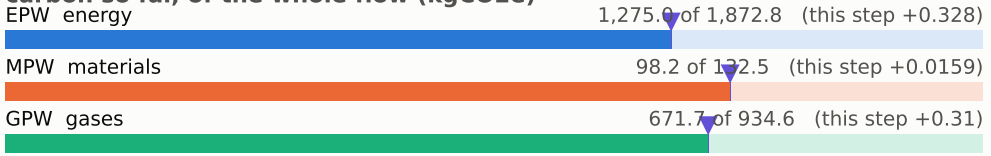

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

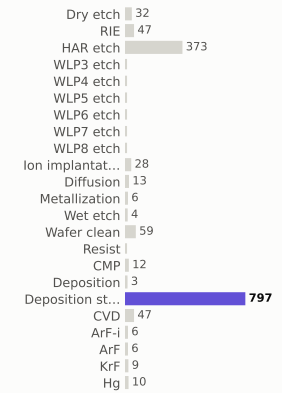

materials deposited (g)

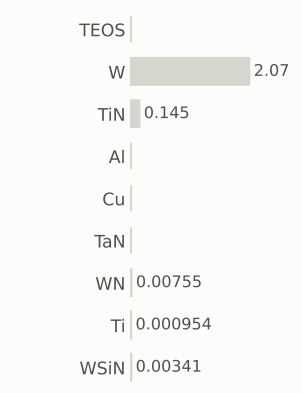

gases emitted (g)

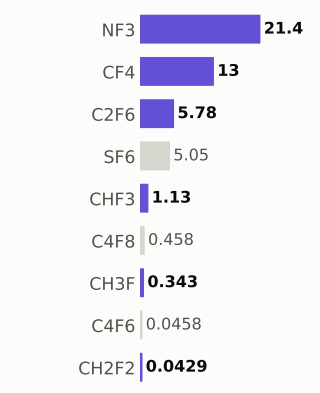

Step #18920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,045.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

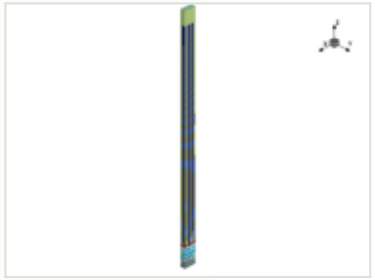

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

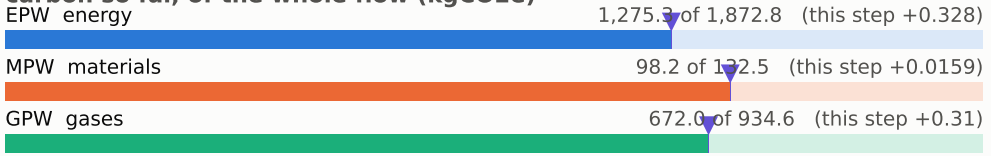

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

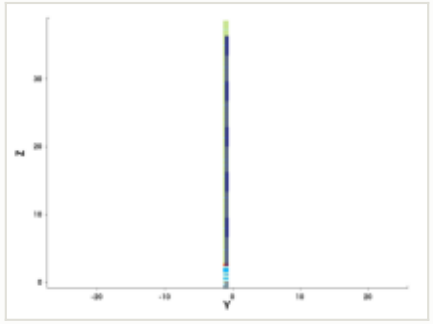

y cut at -1.035 µm

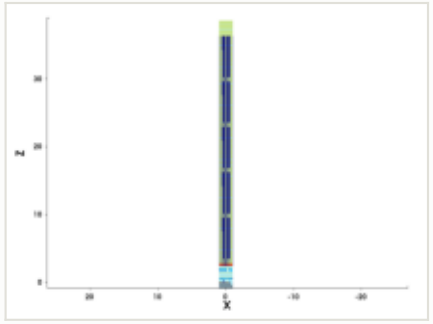

mask for this step

no mask for this step

steps by process area

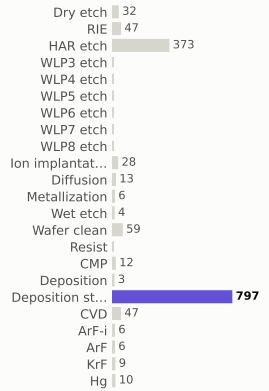

materials deposited (g)

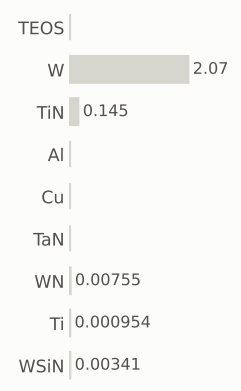

gases emitted (g)

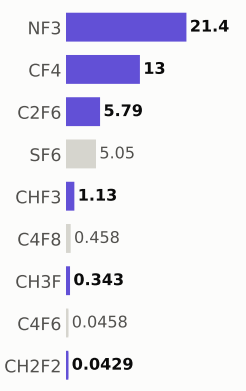

Step #18930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,046.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

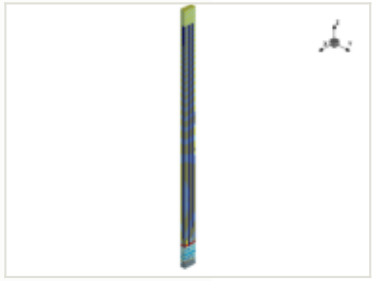

x cut at 0.000 µm

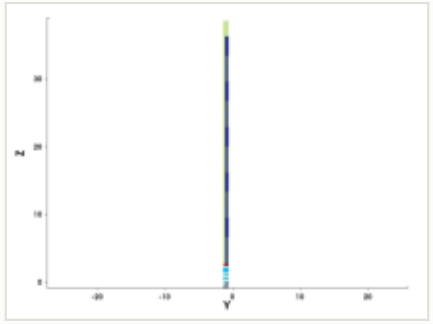

y cut at -1.035 µm

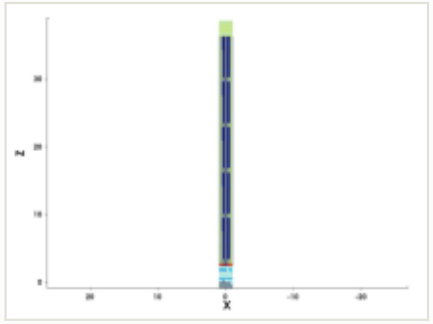

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

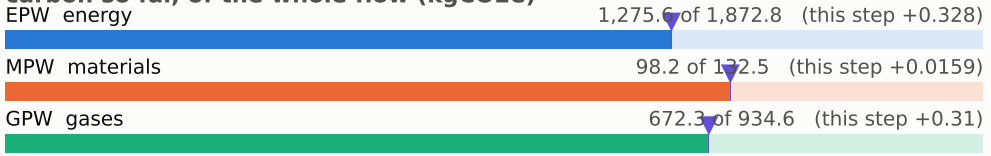

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

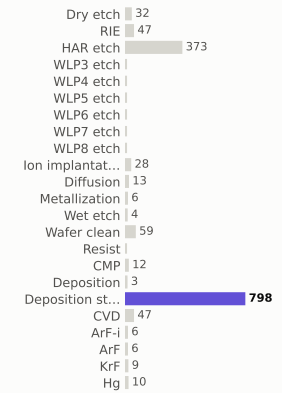

materials deposited (g)

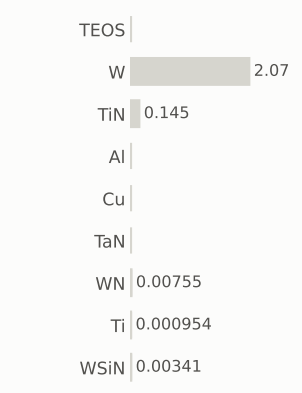

gases emitted (g)

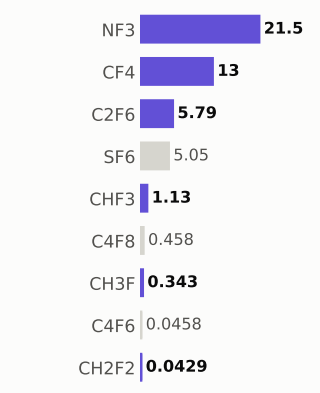

Step #18940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,046.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

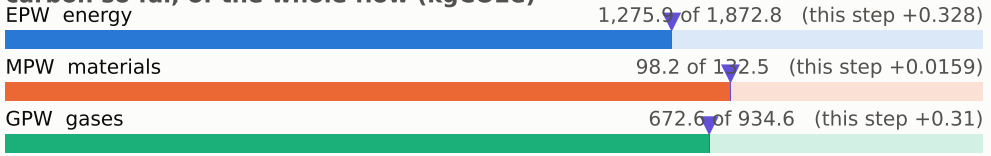

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

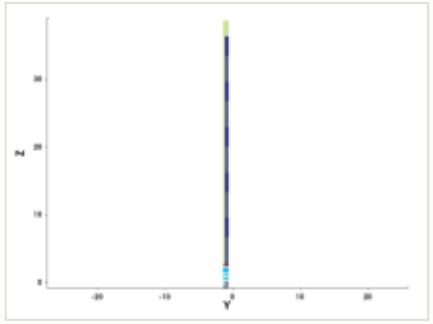

y cut at -1.035 µm

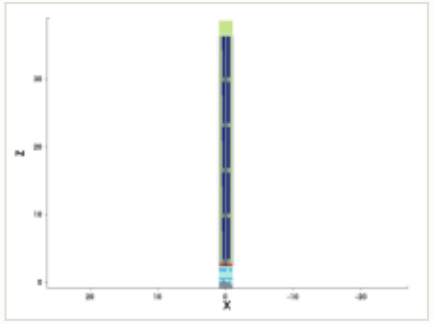

mask for this step

no mask for this step

steps by process area

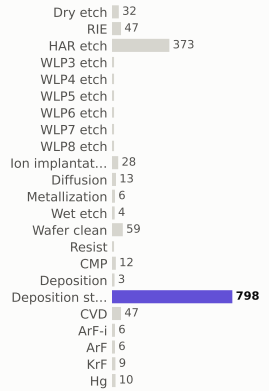

materials deposited (g)

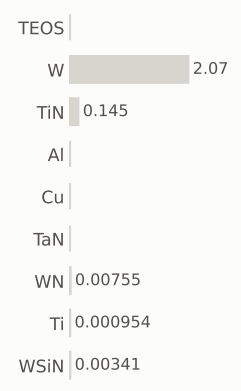

gases emitted (g)

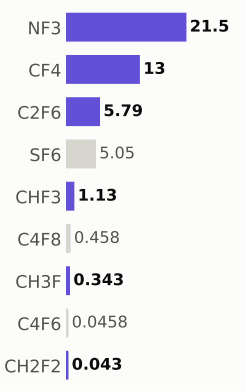

Step #18950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,047.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

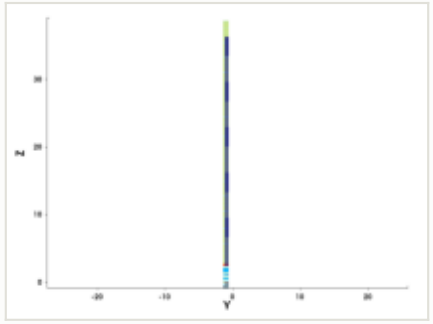

y cut at -1.035 µm

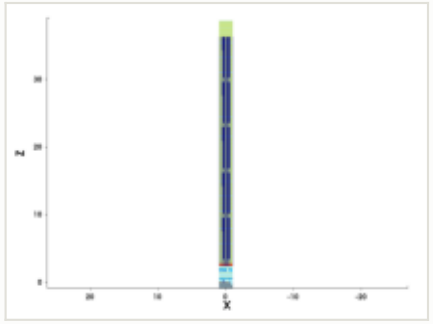

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

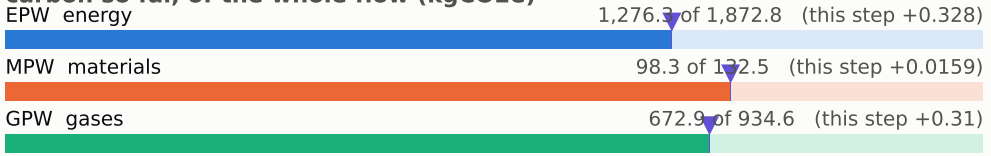

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

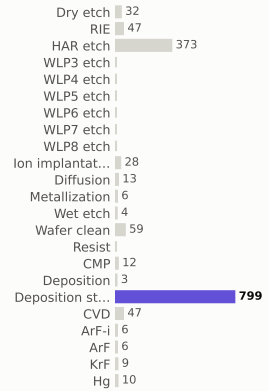

materials deposited (g)

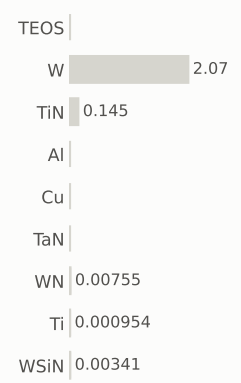

gases emitted (g)

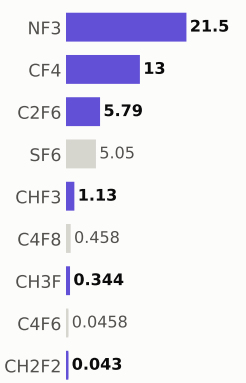

Step #18960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,048.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

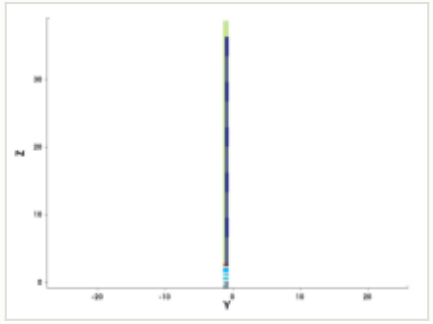

y cut at -1.035 µm

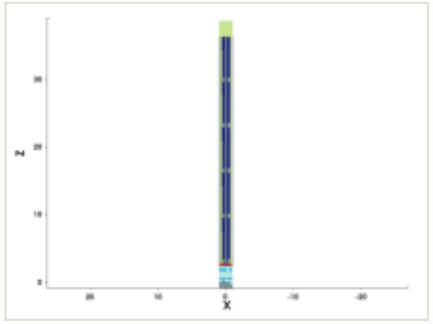

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

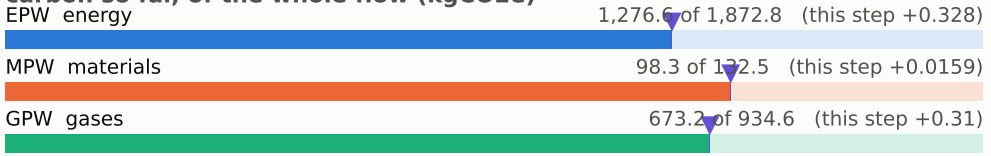

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

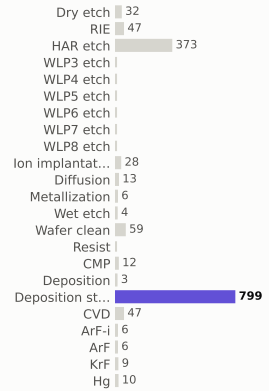

materials deposited (g)

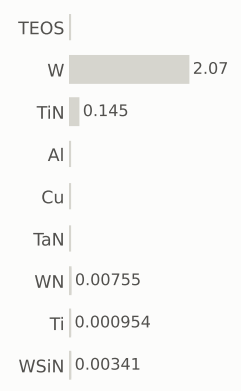

gases emitted (g)

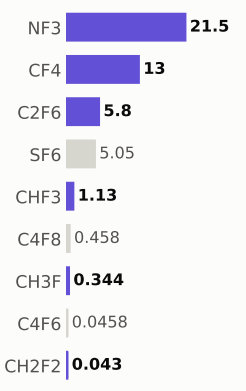

Step #18970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,048.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

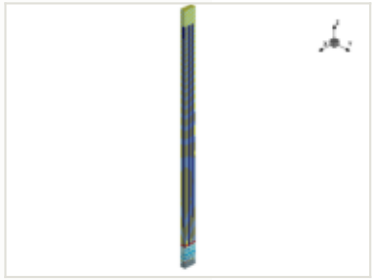

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

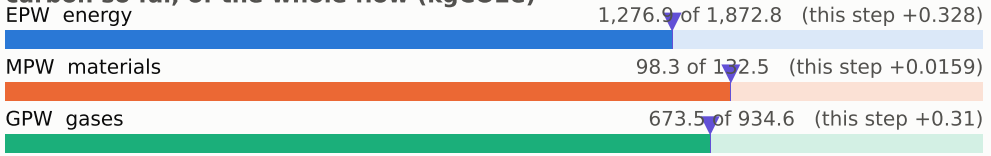

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

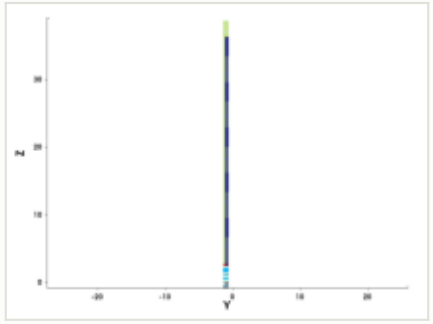

y cut at -1.035 µm

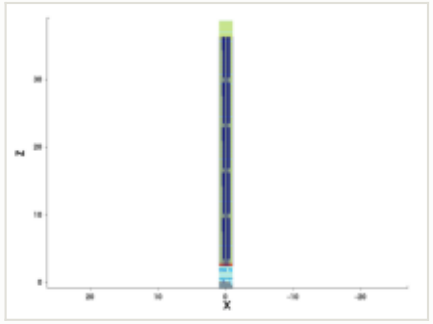

mask for this step

no mask for this step

steps by process area

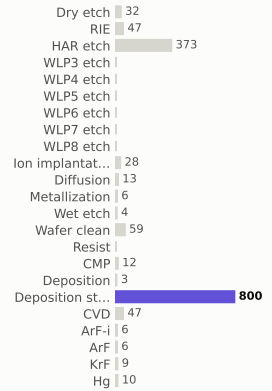

materials deposited (g)

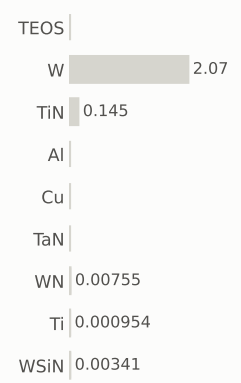

gases emitted (g)

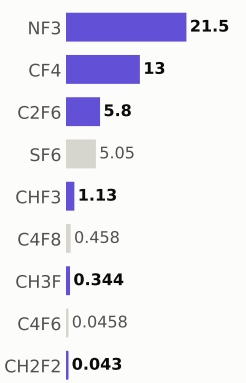

Step #18980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,049.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

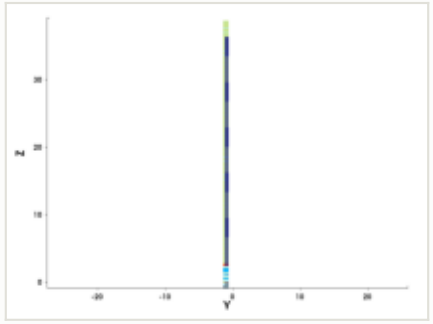

y cut at -1.035 µm

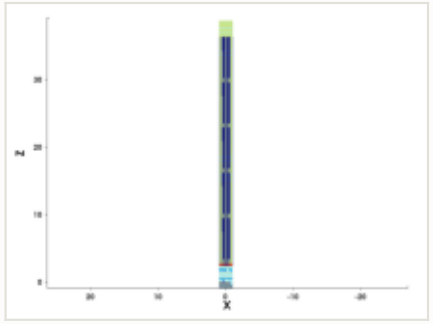

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

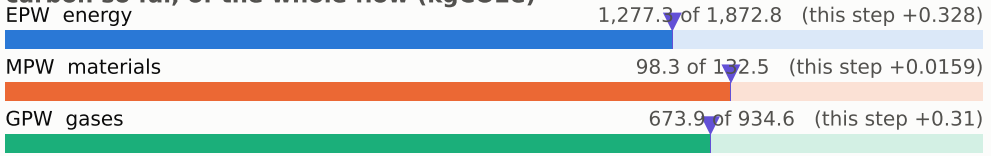

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

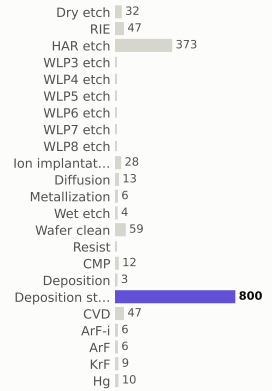

materials deposited (g)

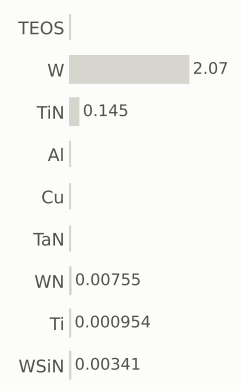

gases emitted (g)

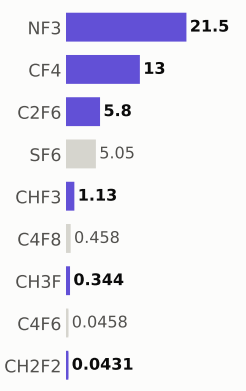

Step #18990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,050.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

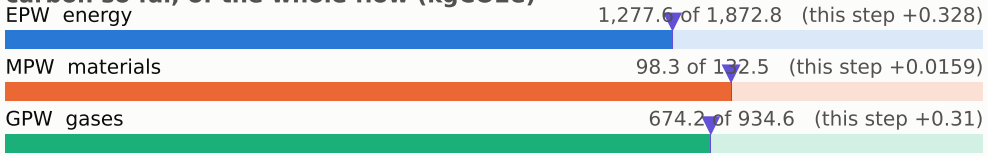

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

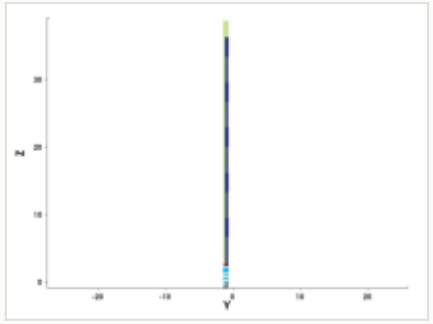

y cut at -1.035 µm

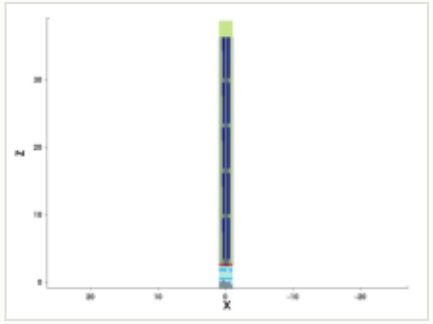

mask for this step

no mask for this step

steps by process area

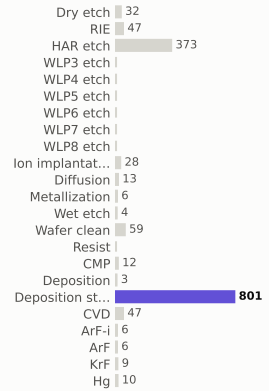

materials deposited (g)

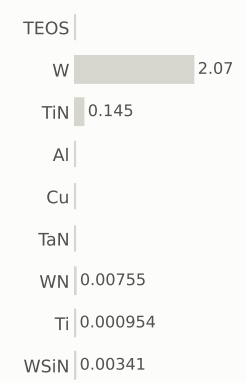

gases emitted (g)

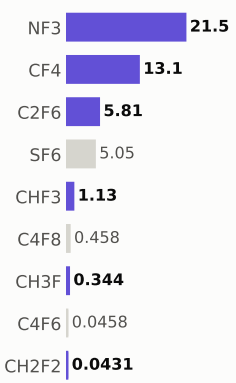

Step #19000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,050.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

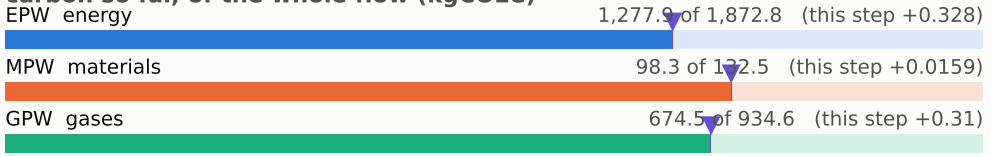

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

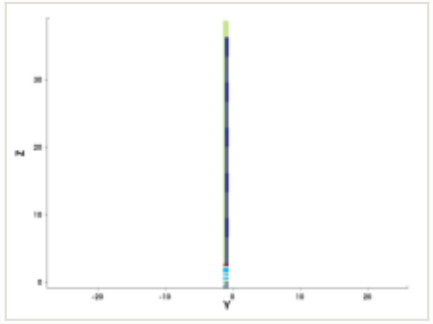

y cut at -1.035 µm

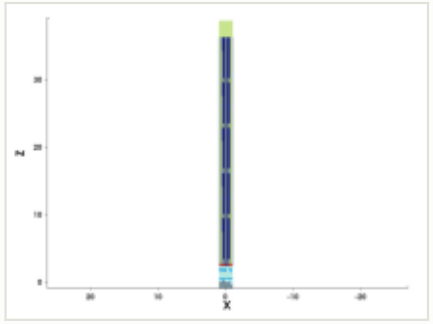

mask for this step

no mask for this step

steps by process area

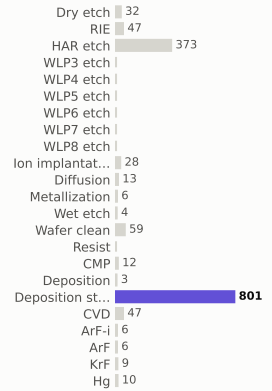

materials deposited (g)

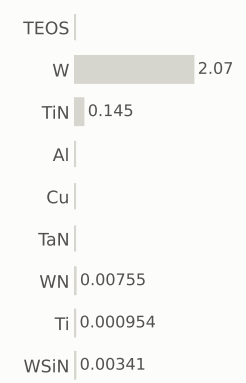

gases emitted (g)

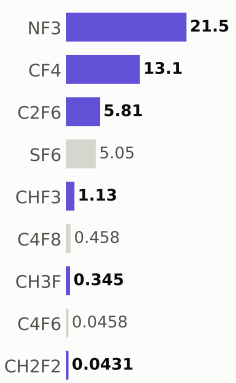

Step #19010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,051.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

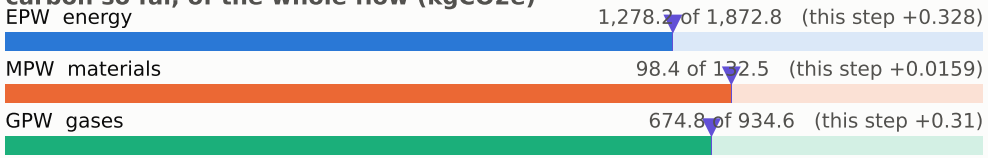

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

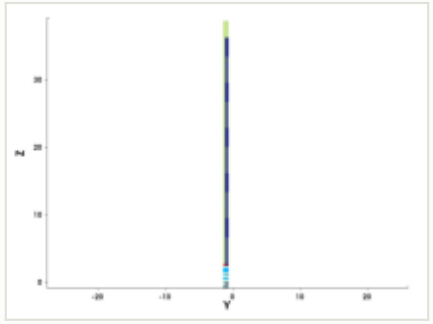

y cut at -1.035 µm

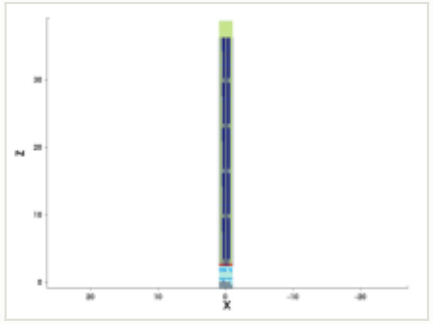

mask for this step

no mask for this step

steps by process area

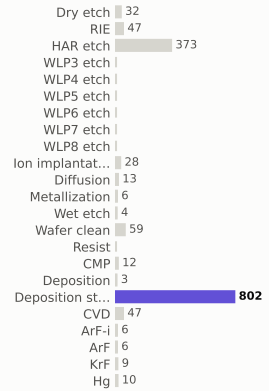

materials deposited (g)

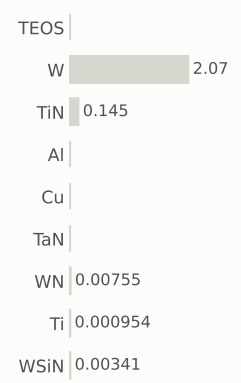

gases emitted (g)

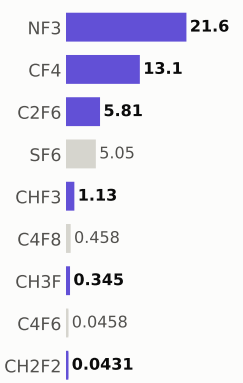

Step #19020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,052.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

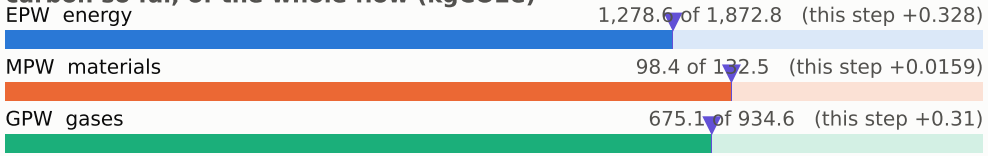

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

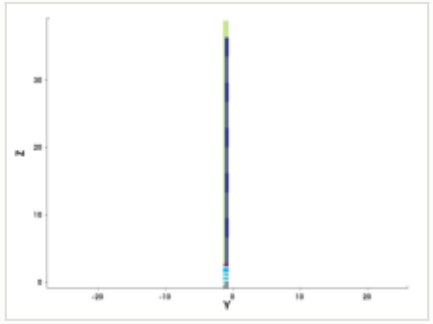

y cut at -1.035 µm

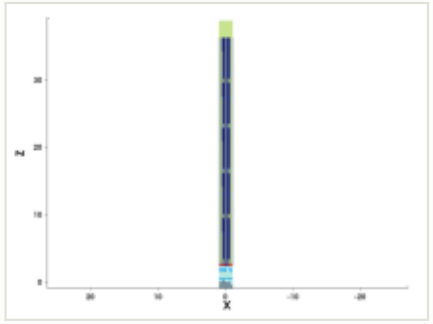

mask for this step

no mask for this step

steps by process area

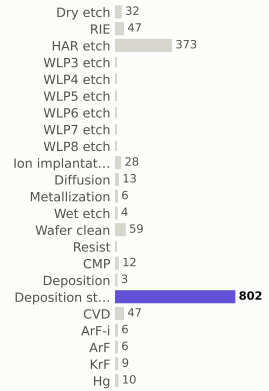

materials deposited (g)

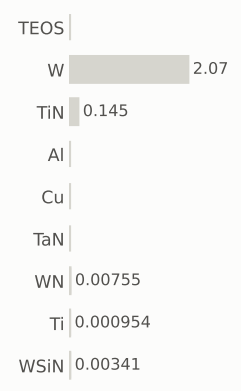

gases emitted (g)

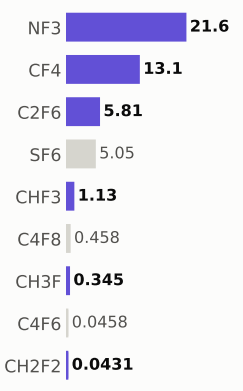

Step #19030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,052.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

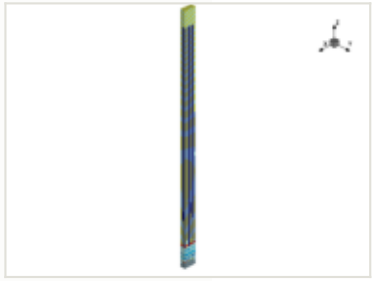

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

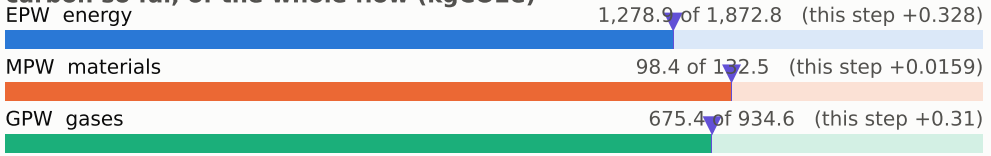

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

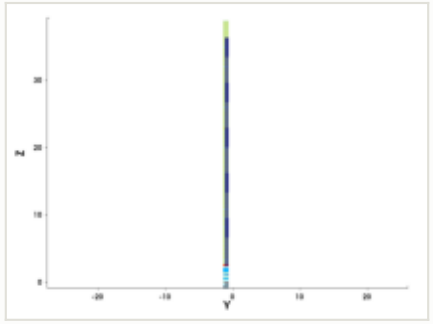

y cut at -1.035 µm

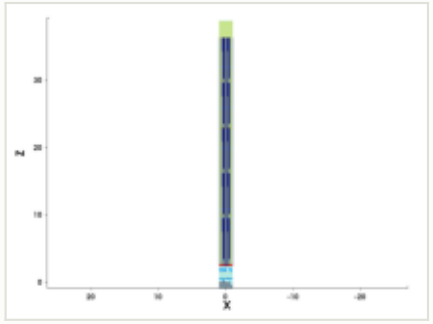

mask for this step

no mask for this step

steps by process area

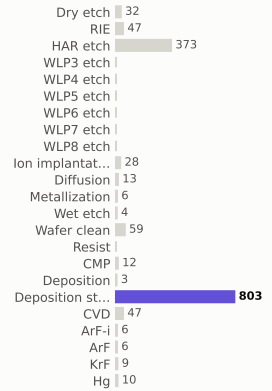

materials deposited (g)

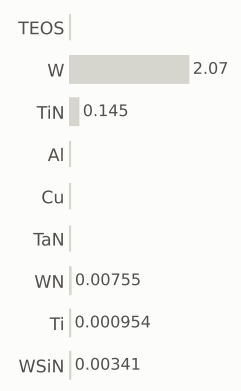

gases emitted (g)

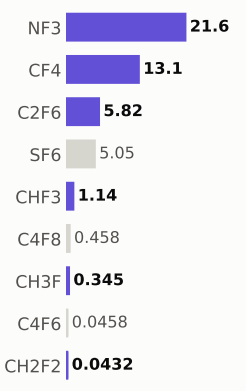

Step #19040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,053.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

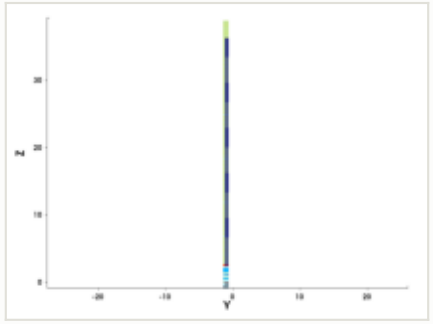

y cut at -1.035 µm

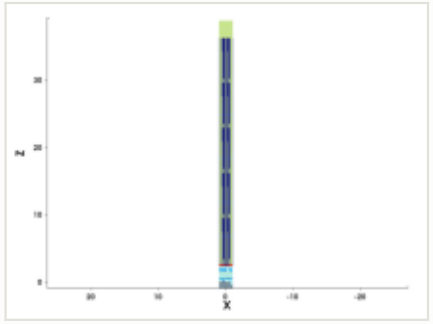

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

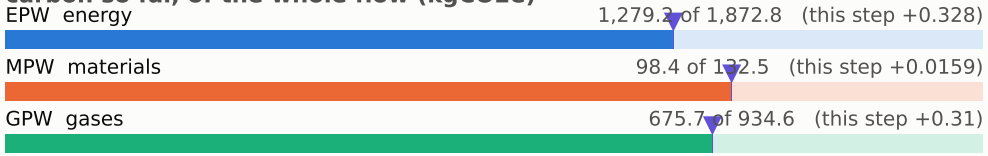

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

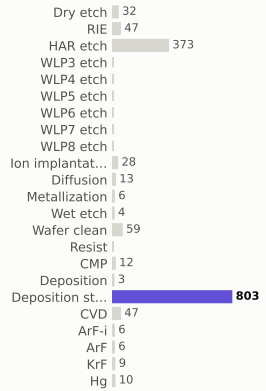

materials deposited (g)

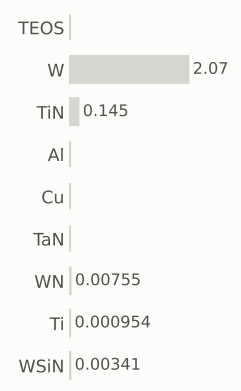

gases emitted (g)

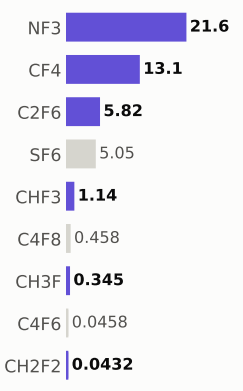

Step #19050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,054.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

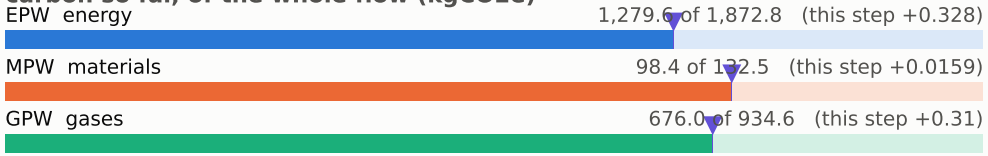

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

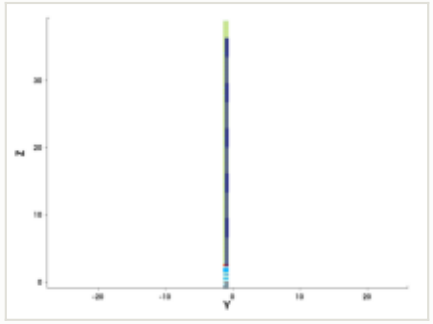

y cut at -1.035 µm

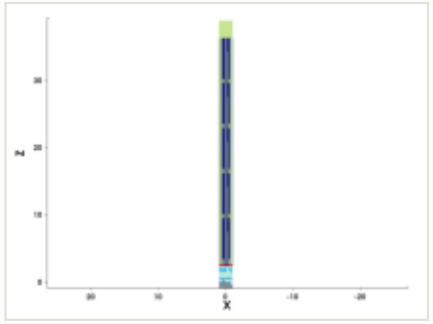

mask for this step

no mask for this step

steps by process area

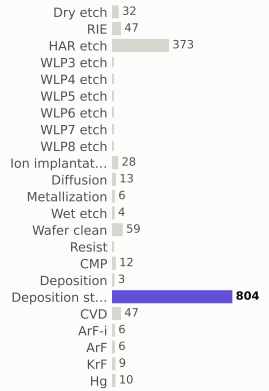

materials deposited (g)

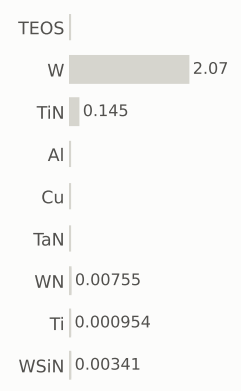

gases emitted (g)

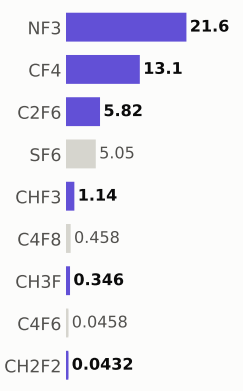

Step #19060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,054.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

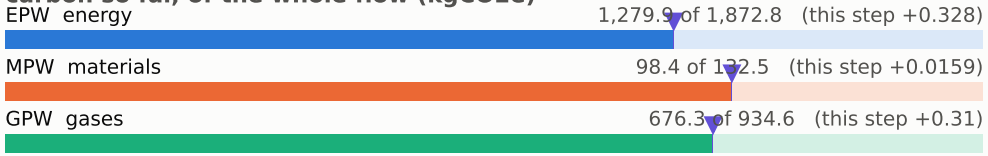

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

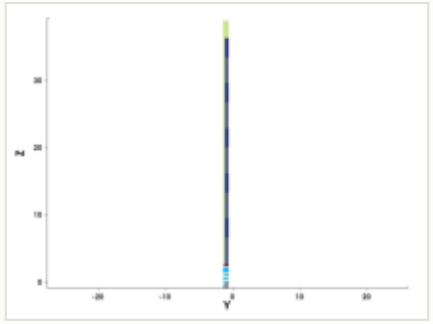

y cut at -1.035 µm

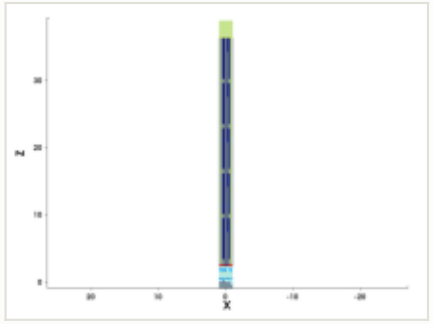

mask for this step

no mask for this step

steps by process area

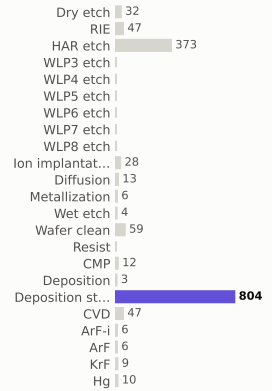

materials deposited (g)

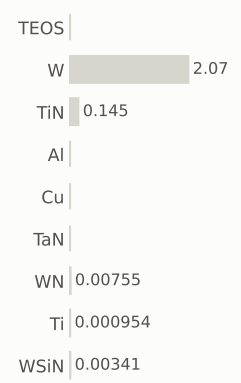

gases emitted (g)

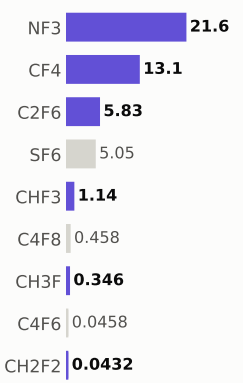

Step #19070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,055.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

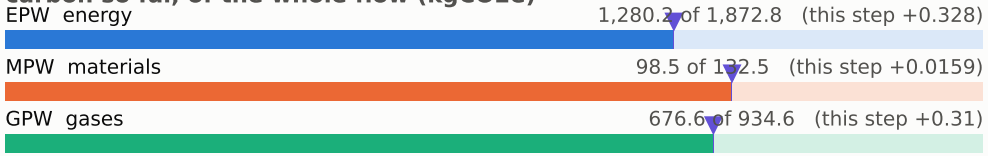

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

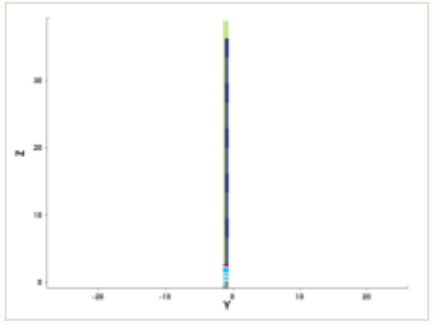

y cut at -1.035 µm

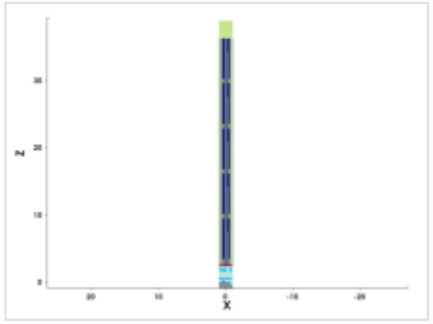

mask for this step

no mask for this step

steps by process area

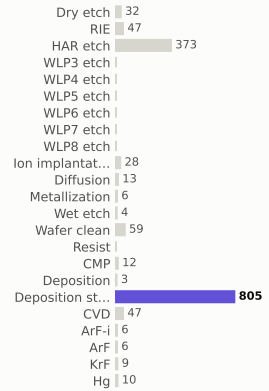

materials deposited (g)

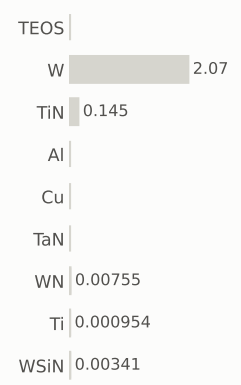

gases emitted (g)

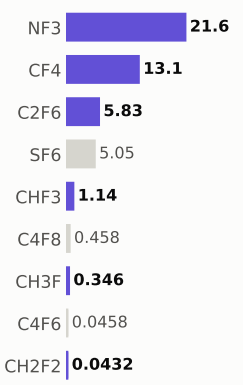

Step #19080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,056.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

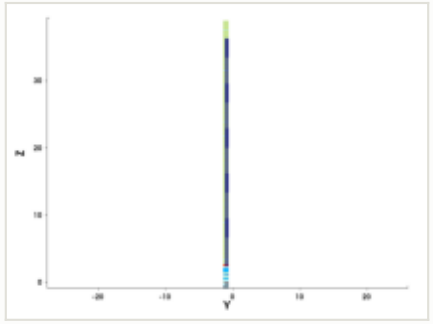

y cut at -1.035 µm

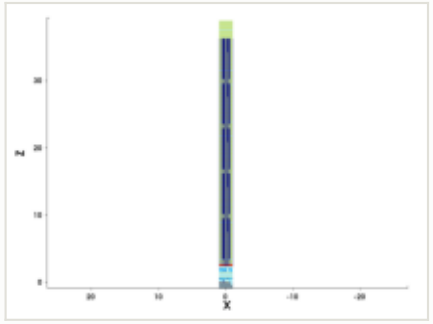

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

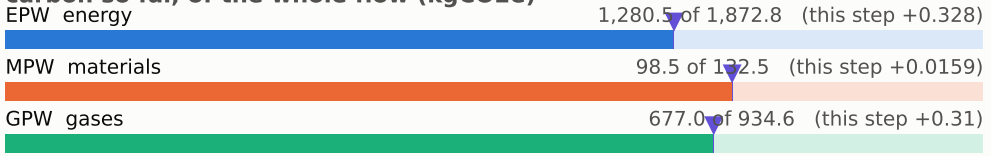

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

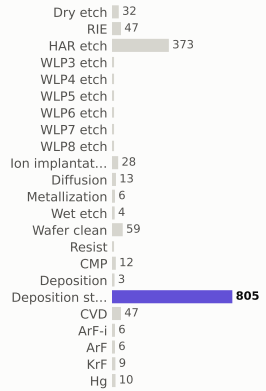

materials deposited (g)

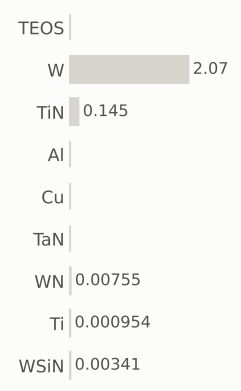

gases emitted (g)

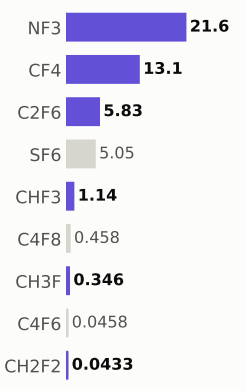

Step #19090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,056.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

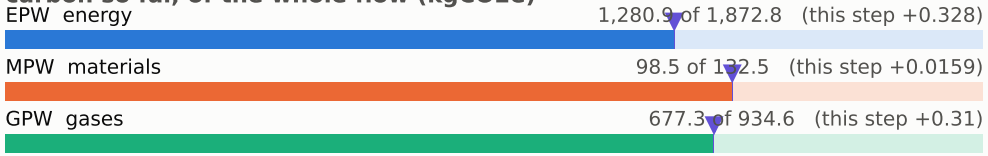

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

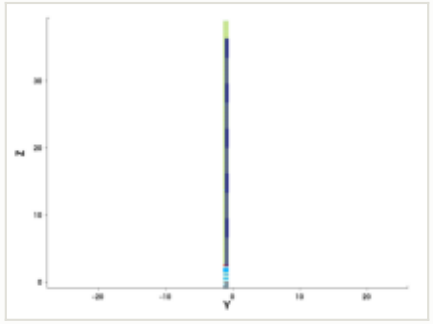

y cut at -1.035 µm

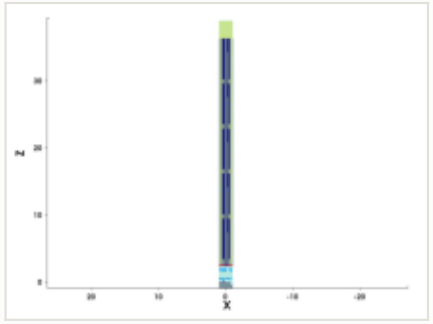

mask for this step

no mask for this step

steps by process area

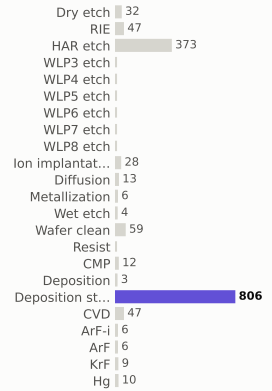

materials deposited (g)

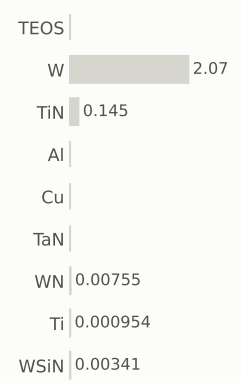

gases emitted (g)

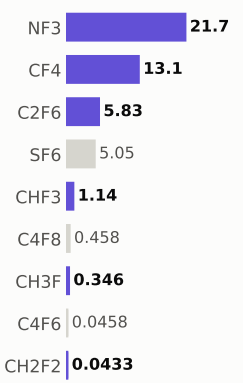

Step #19100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,057.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

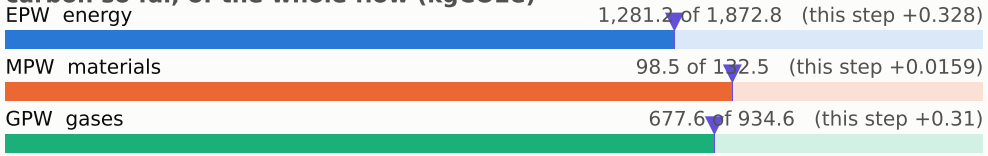

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

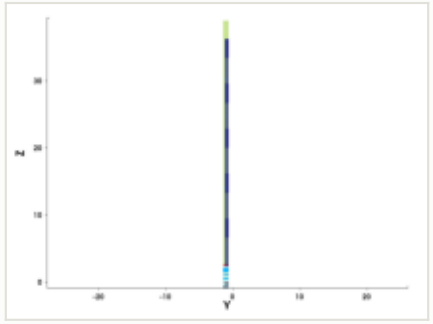

y cut at -1.035 µm

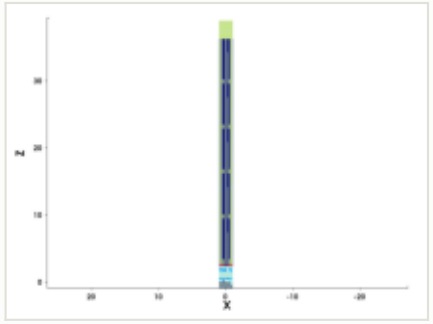

mask for this step

no mask for this step

steps by process area

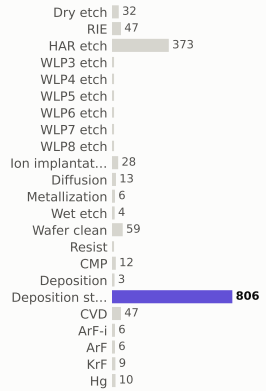

materials deposited (g)

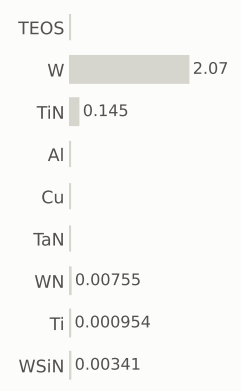

gases emitted (g)

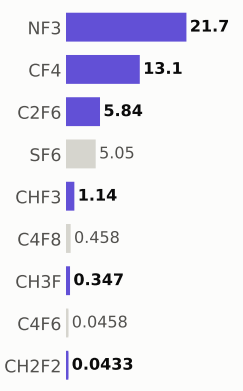

Step #19110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,057.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

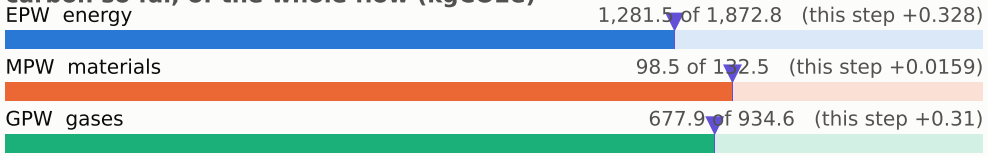

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

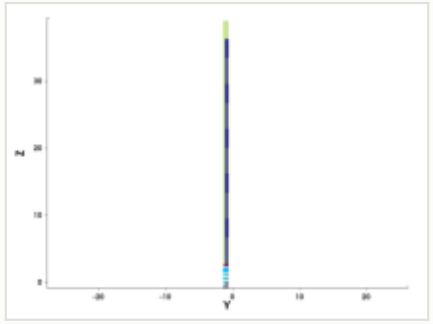

y cut at -1.035 µm

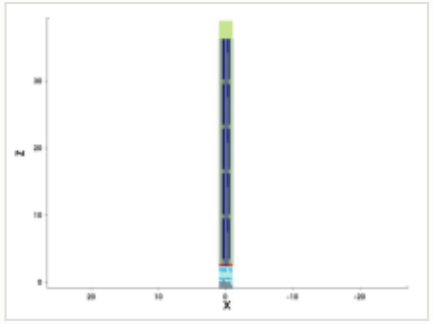

mask for this step

no mask for this step

steps by process area

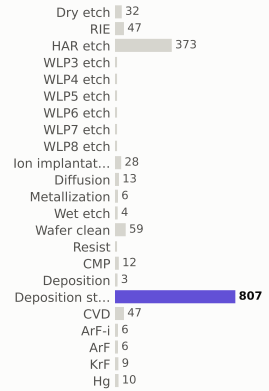

materials deposited (g)

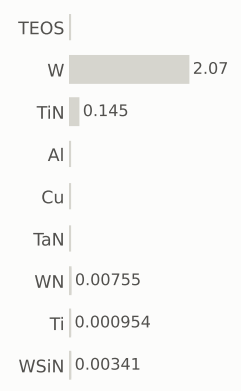

gases emitted (g)

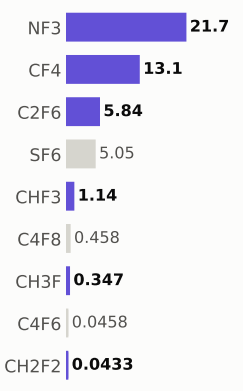

Step #19120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,058.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

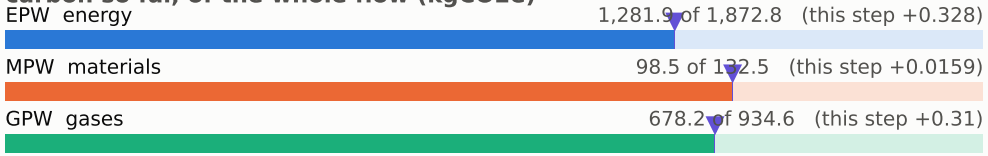

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

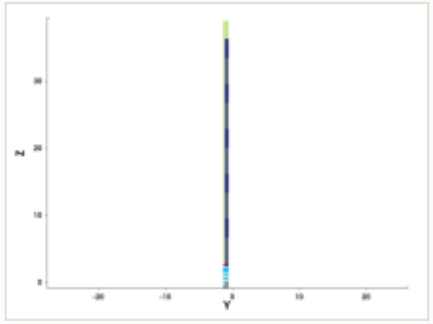

y cut at -1.035 µm

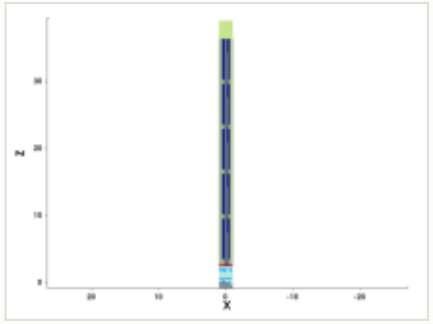

mask for this step

no mask for this step

steps by process area

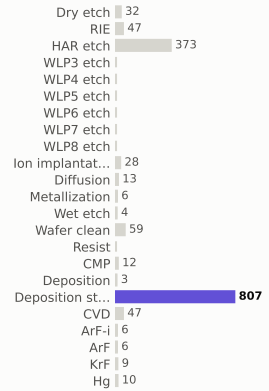

materials deposited (g)

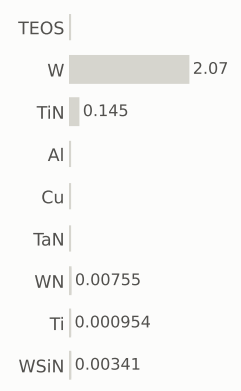

gases emitted (g)

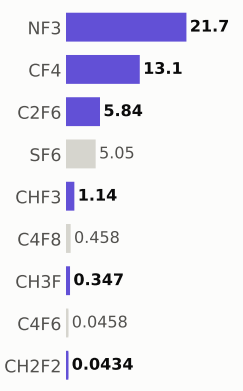

Step #19130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,059.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

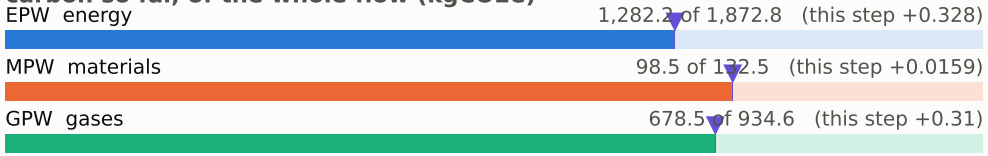

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

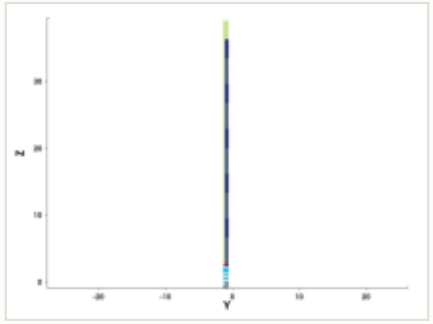

y cut at -1.035 µm

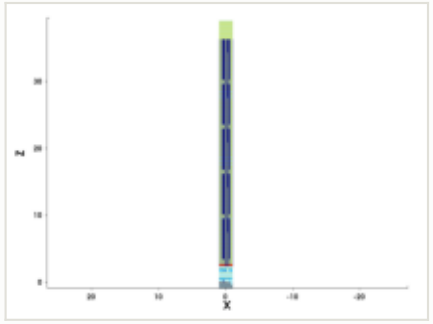

mask for this step

no mask for this step

steps by process area

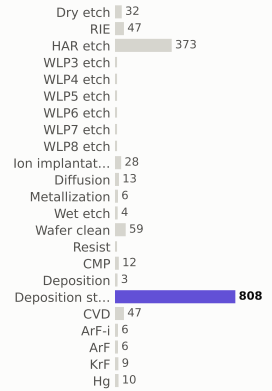

materials deposited (g)

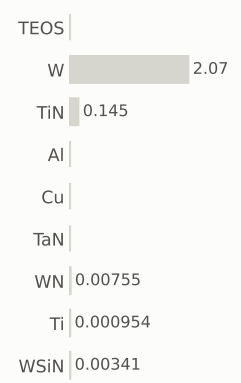

gases emitted (g)

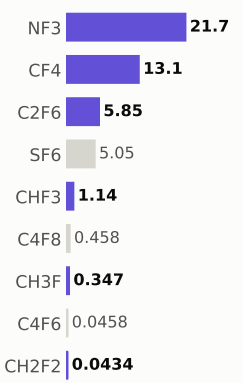

Step #19140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,059.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

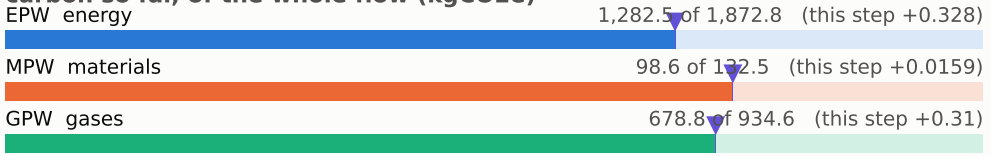

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

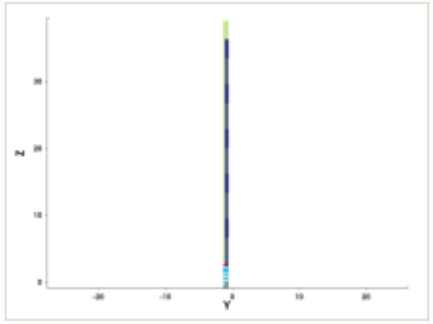

y cut at -1.035 µm

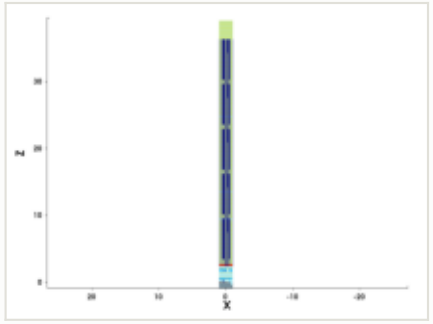

mask for this step

no mask for this step

steps by process area

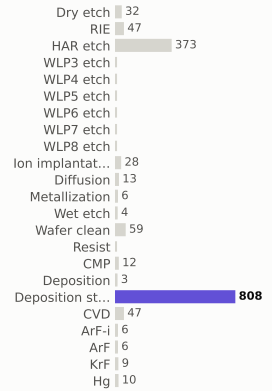

materials deposited (g)

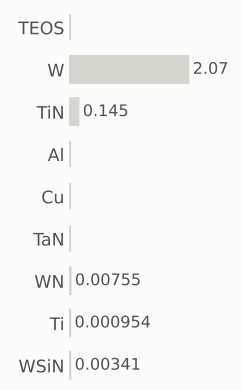

gases emitted (g)

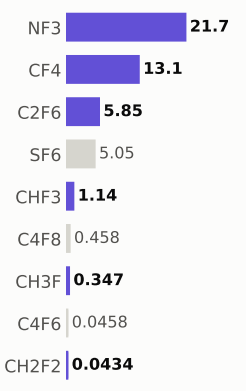

Step #19150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,060.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

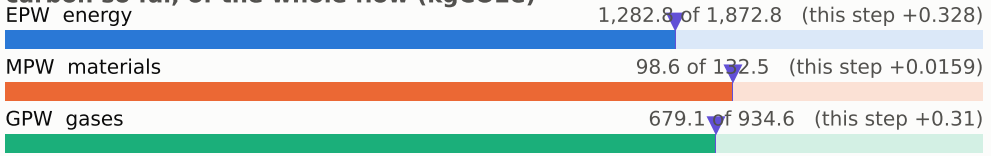

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

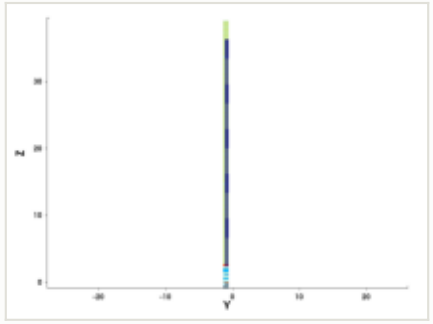

y cut at -1.035 µm

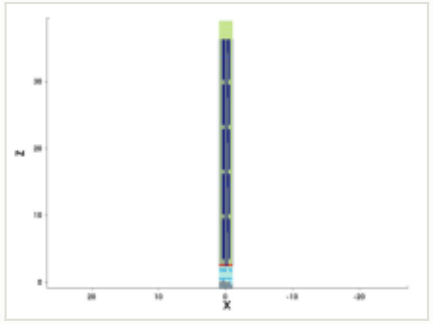

mask for this step

no mask for this step

steps by process area

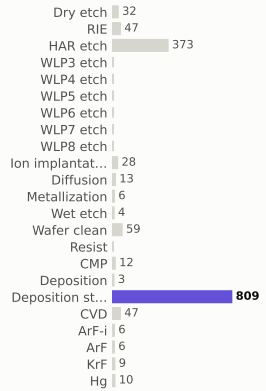

materials deposited (g)

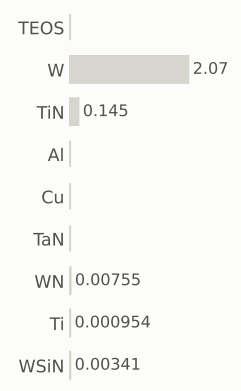

gases emitted (g)

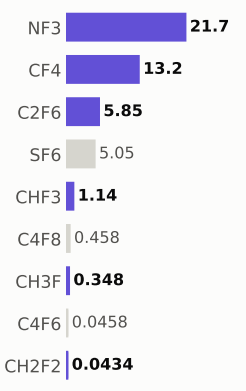

Step #19160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,061.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

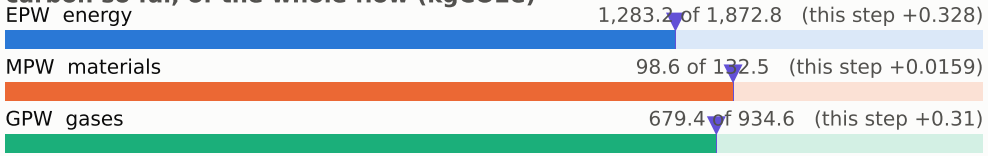

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

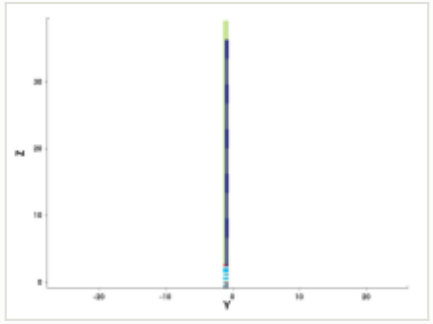

y cut at -1.035 µm

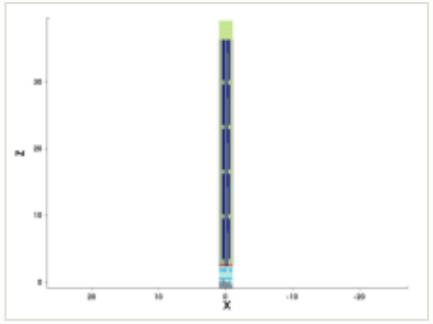

mask for this step

no mask for this step

steps by process area

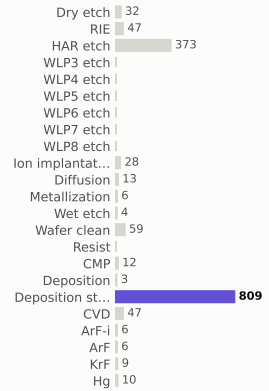

materials deposited (g)

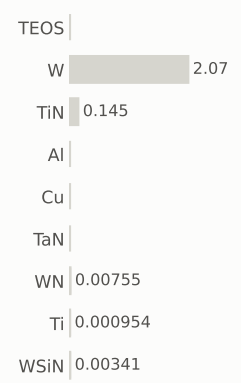

gases emitted (g)

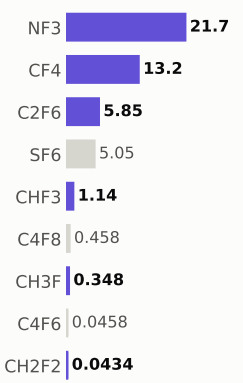

Step #19170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,061.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

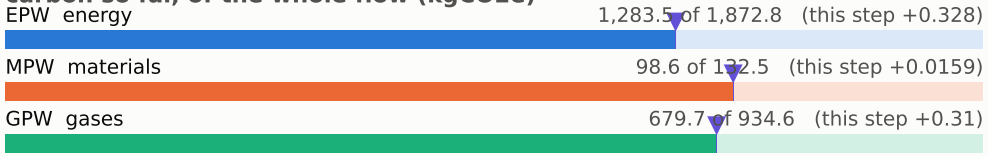

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

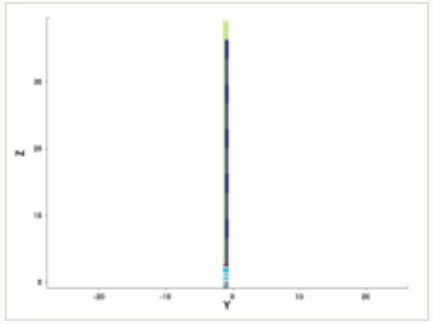

y cut at -1.035 µm

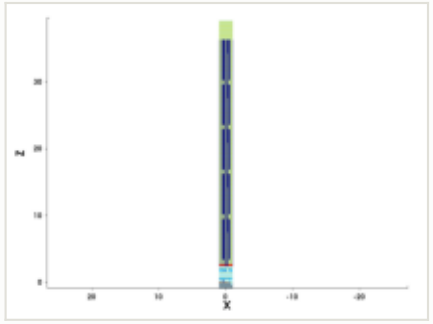

mask for this step

no mask for this step

steps by process area

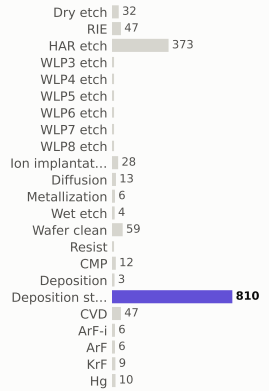

materials deposited (g)

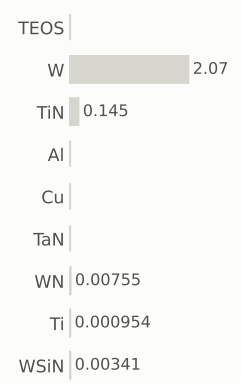

gases emitted (g)

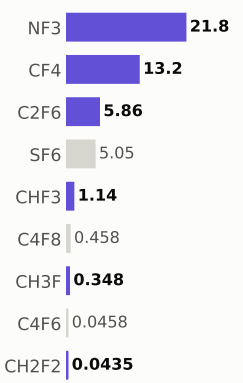

Step #19180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,062.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

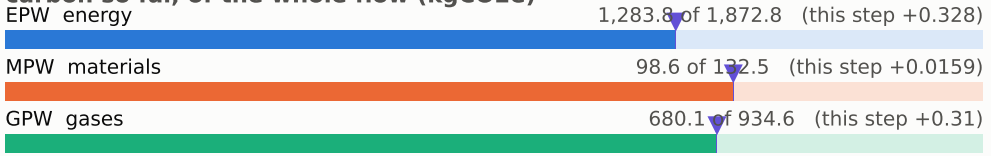

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

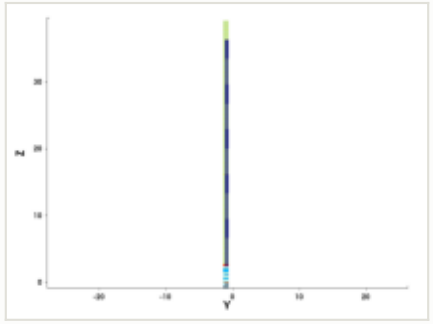

y cut at -1.035 µm

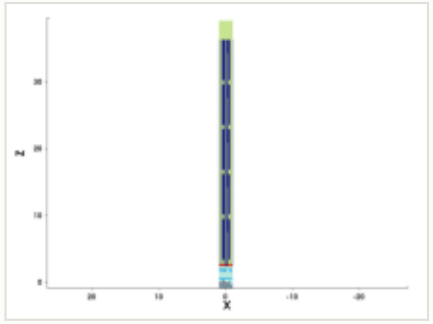

mask for this step

no mask for this step

steps by process area

materials deposited (g)

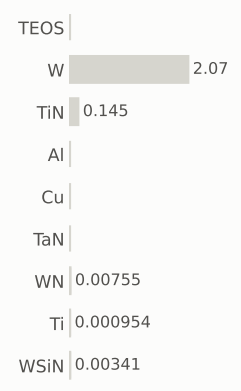

gases emitted (g)

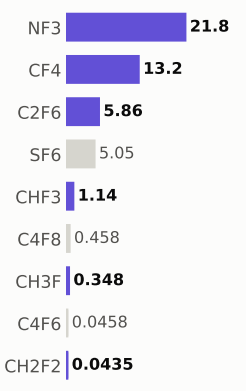

Step #19190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,063.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

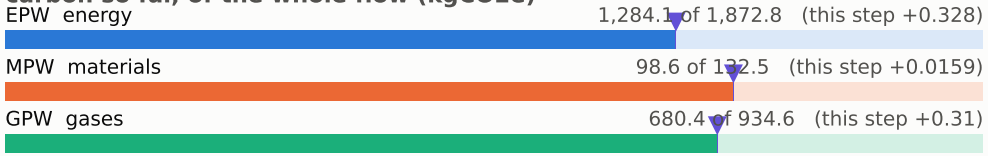

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

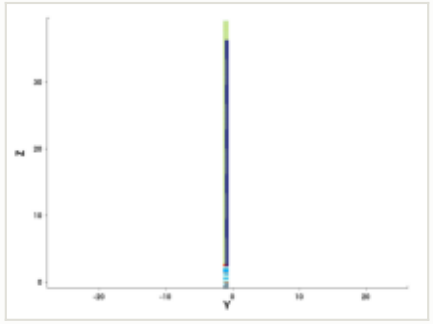

y cut at -1.035 µm

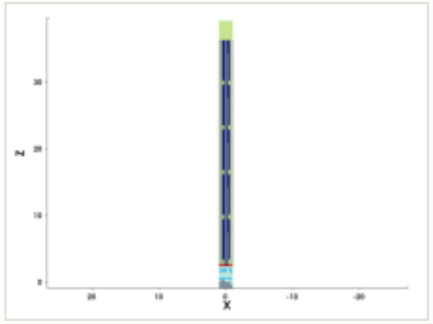

mask for this step

no mask for this step

steps by process area

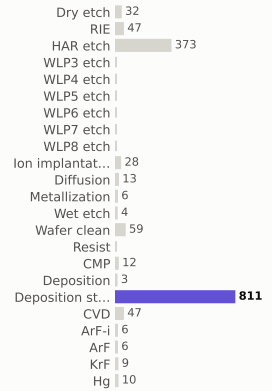

materials deposited (g)

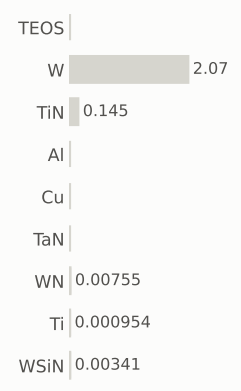

gases emitted (g)

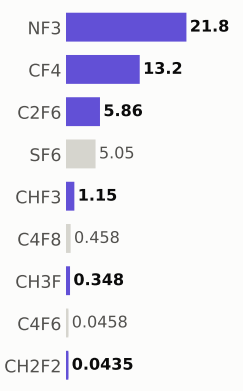

Step #19200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,063.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

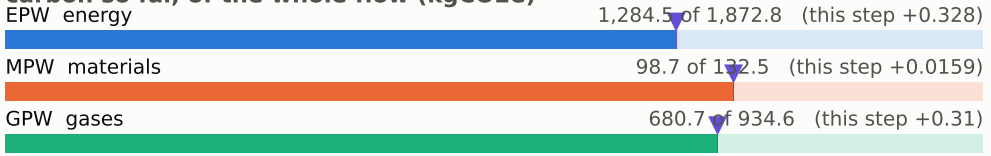

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

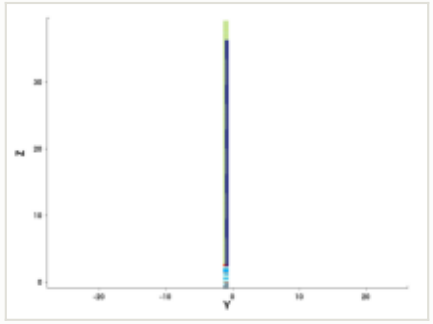

y cut at -1.035 µm

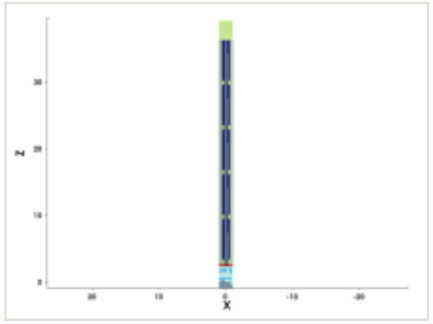

mask for this step

no mask for this step

steps by process area

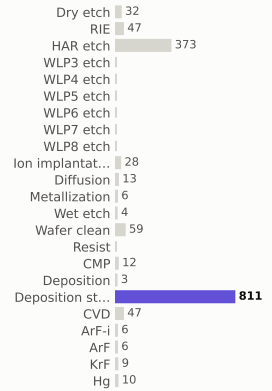

materials deposited (g)

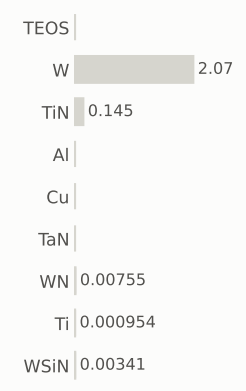

gases emitted (g)

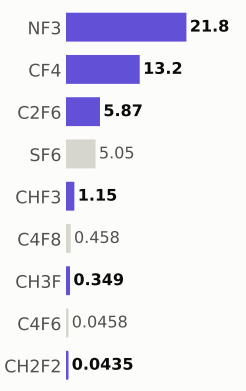

Step #19210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,064.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

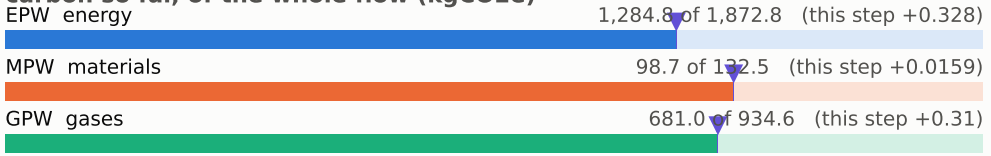

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

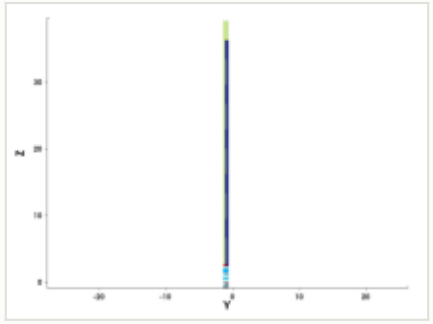

y cut at -1.035 µm

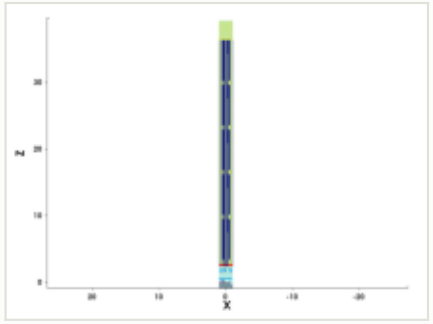

mask for this step

no mask for this step

steps by process area

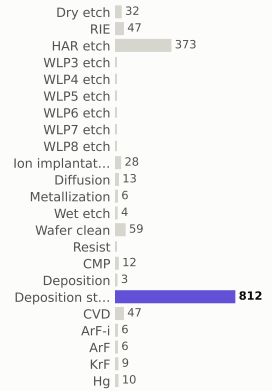

materials deposited (g)

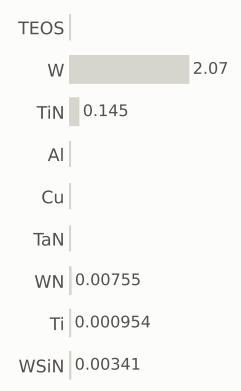

gases emitted (g)

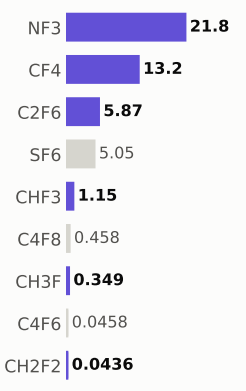

Step #19220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,065.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

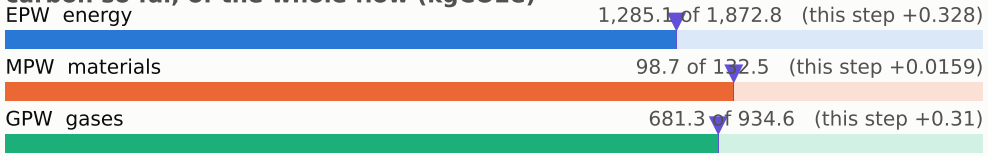

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

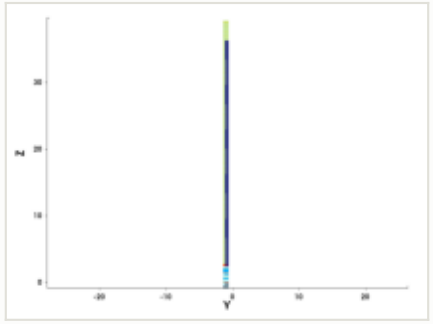

y cut at -1.035 µm

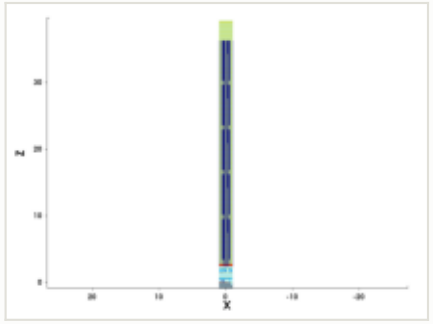

mask for this step

no mask for this step

steps by process area

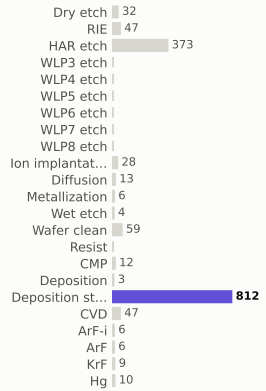

materials deposited (g)

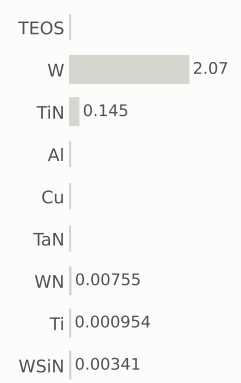

gases emitted (g)

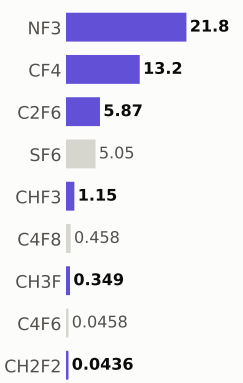

Step #19230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,065.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

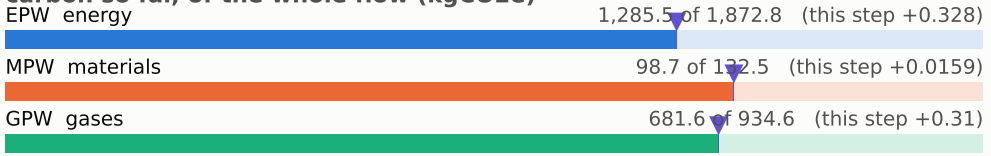

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

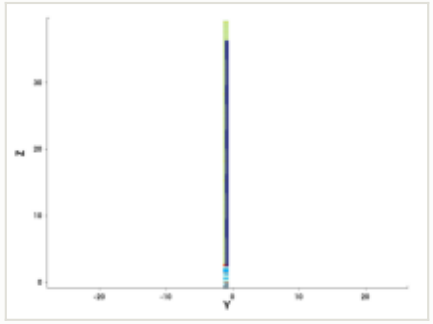

y cut at -1.035 µm

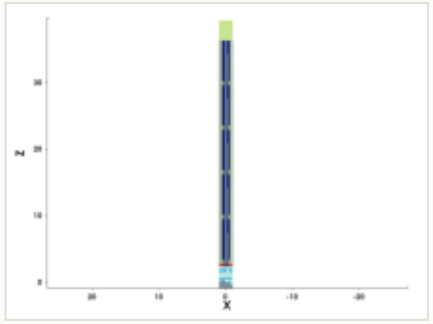

mask for this step

no mask for this step

steps by process area

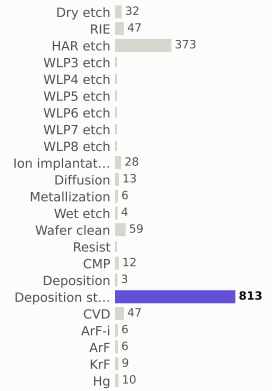

materials deposited (g)

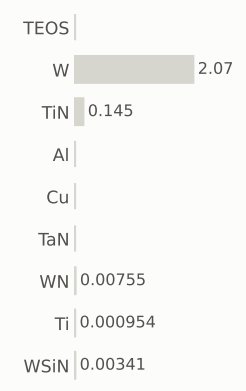

gases emitted (g)

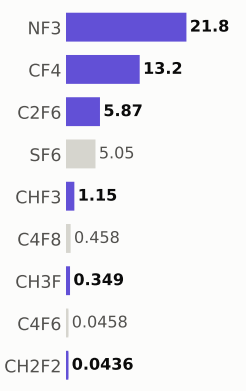

Step #19240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,066.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

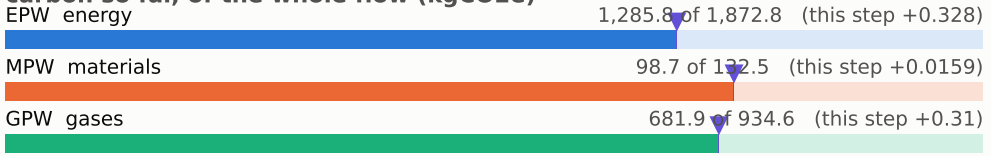

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

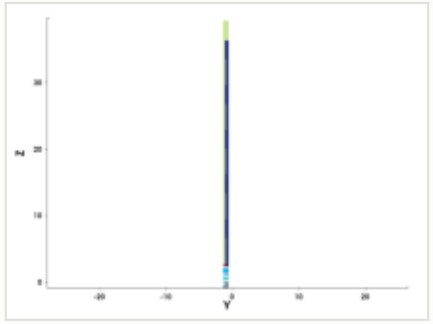

y cut at -1.035 µm

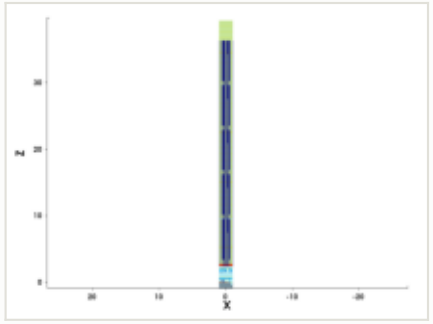

mask for this step

no mask for this step

steps by process area

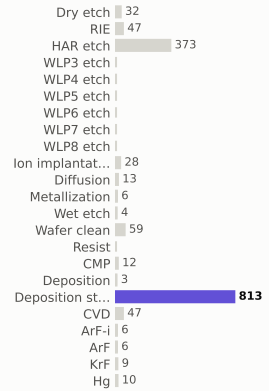

materials deposited (g)

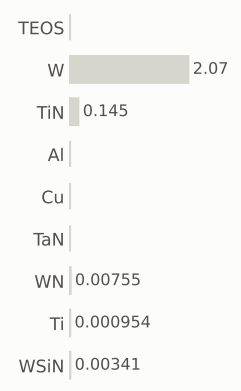

gases emitted (g)

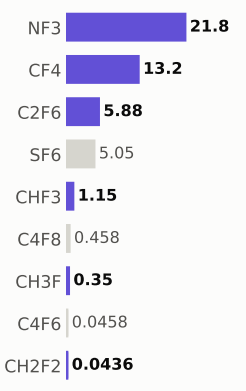

Step #19250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,067.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

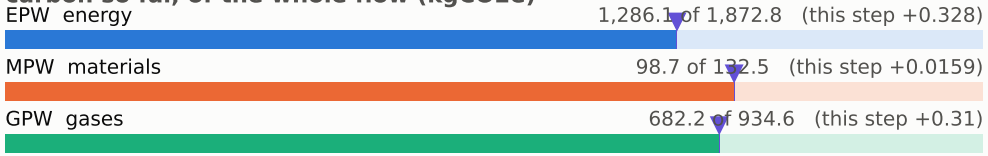

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

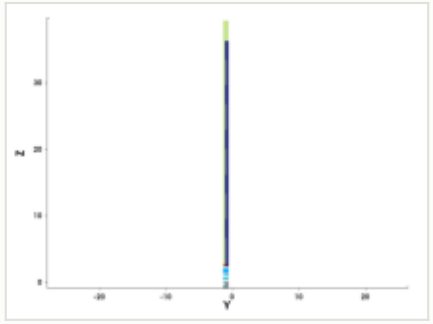

y cut at -1.035 µm

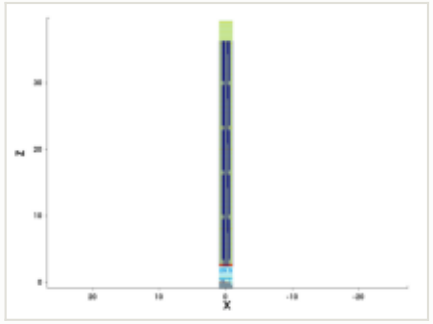

mask for this step

no mask for this step

steps by process area

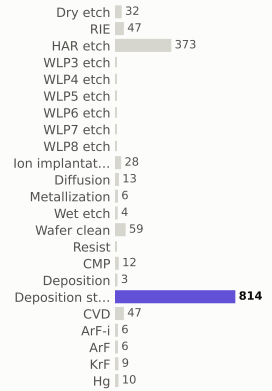

materials deposited (g)

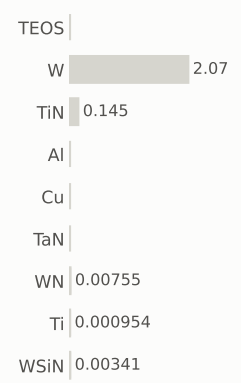

gases emitted (g)

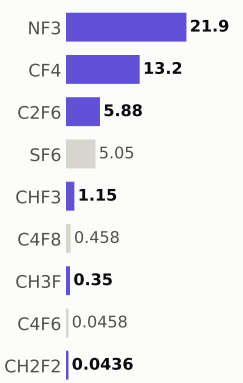

Step #19260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,067.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

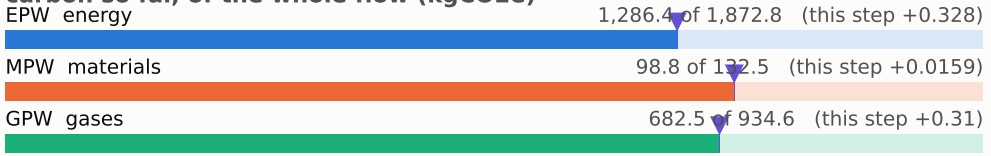

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

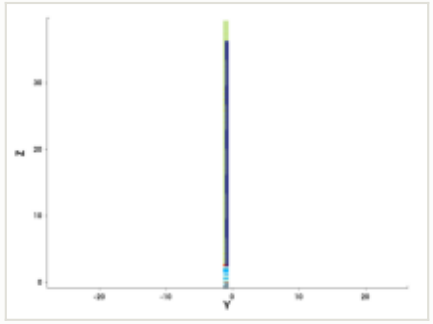

y cut at -1.035 µm

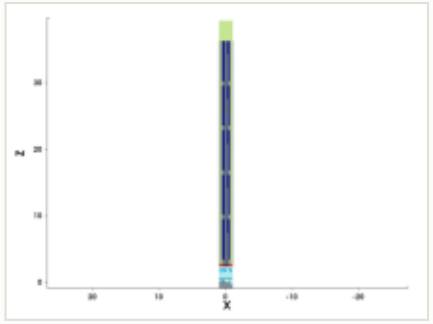

mask for this step

no mask for this step

steps by process area

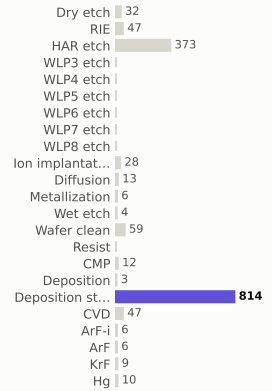

materials deposited (g)

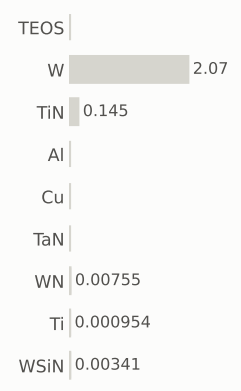

gases emitted (g)

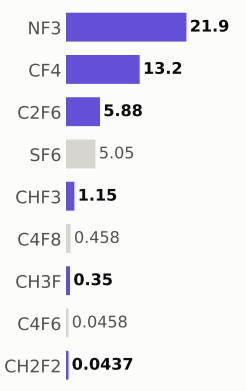

Step #19270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,068.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

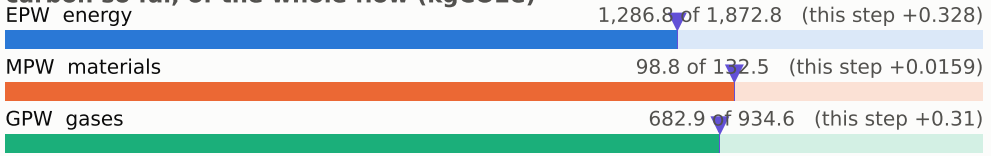

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

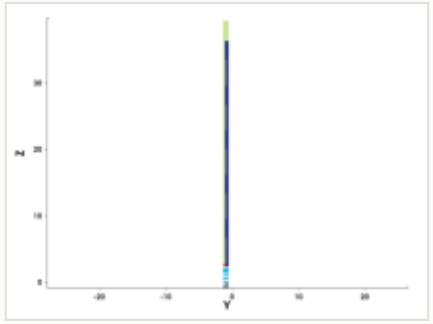

y cut at -1.035 µm

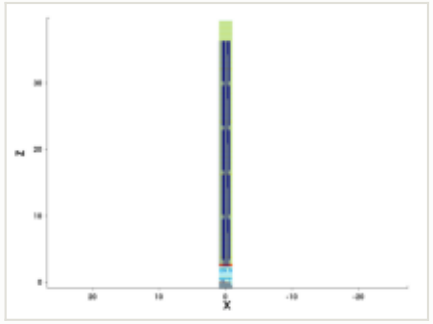

mask for this step

no mask for this step

steps by process area

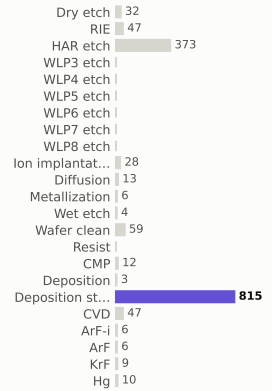

materials deposited (g)

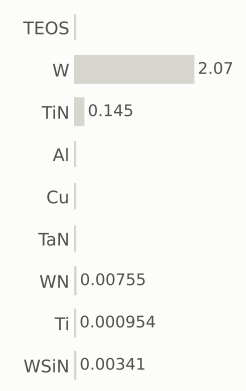

gases emitted (g)

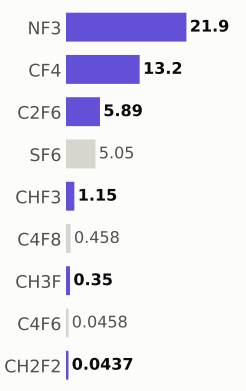

Step #19280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,069.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

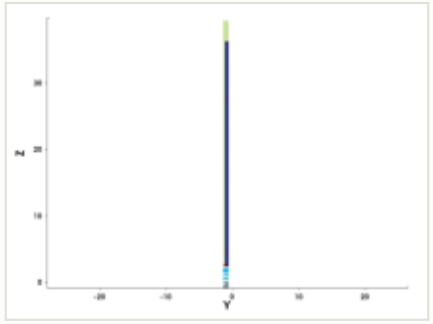

y cut at -1.035 µm

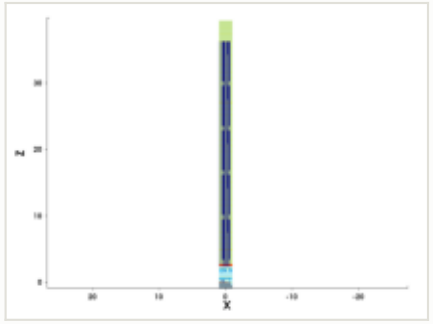

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

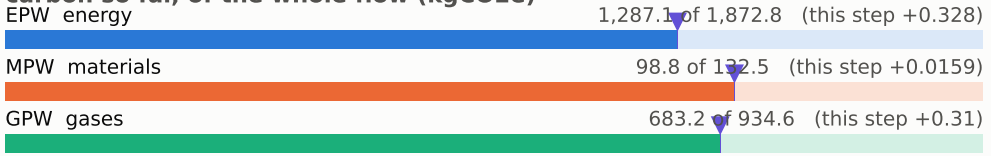

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

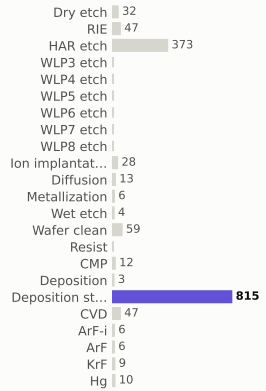

materials deposited (g)

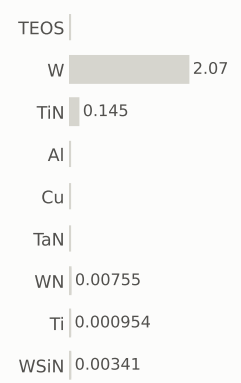

gases emitted (g)

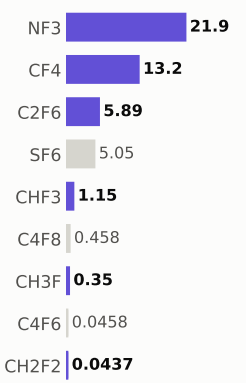

Step #19290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,069.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

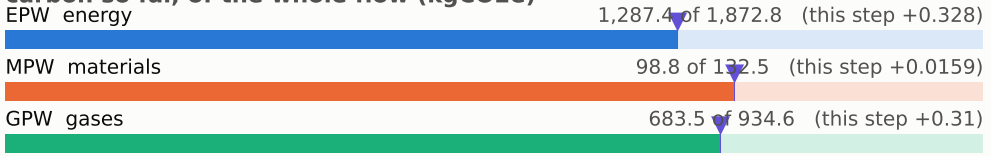

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

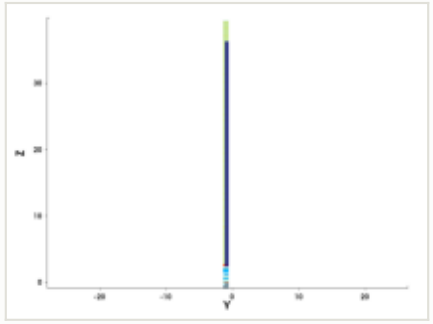

y cut at -1.035 µm

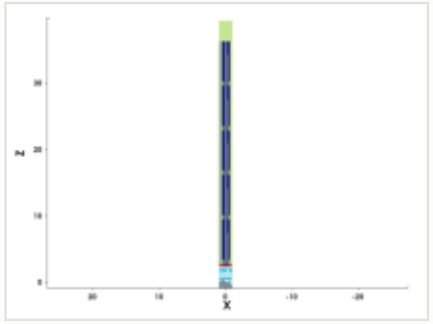

mask for this step

no mask for this step

steps by process area

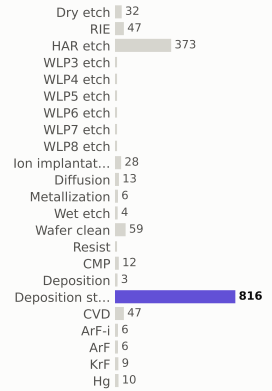

materials deposited (g)

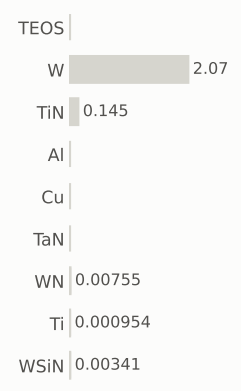

gases emitted (g)

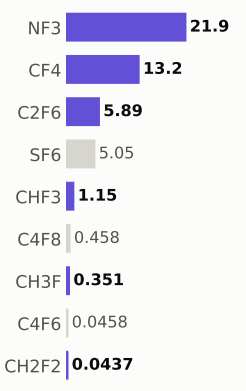

Step #19300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,070.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

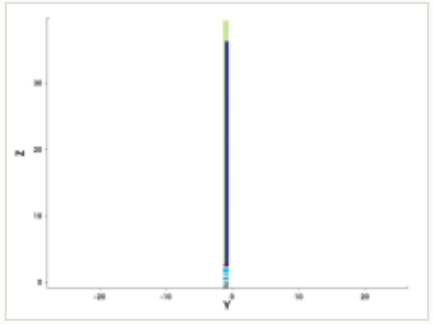

y cut at -1.035 µm

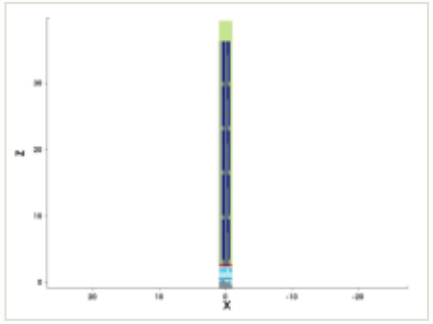

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

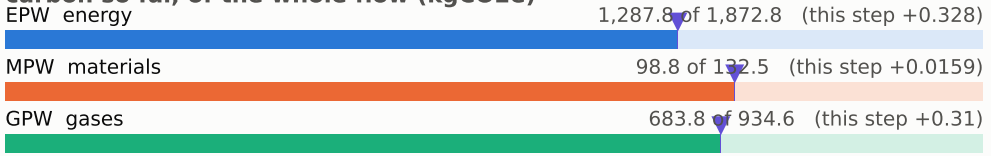

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

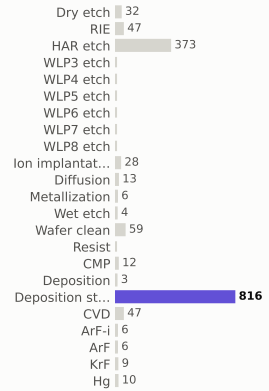

materials deposited (g)

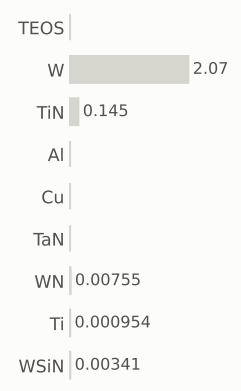

gases emitted (g)

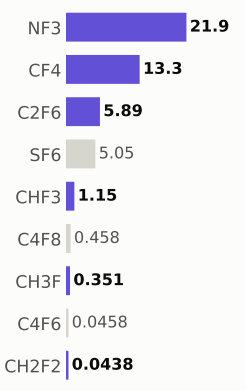

Step #19310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,071.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

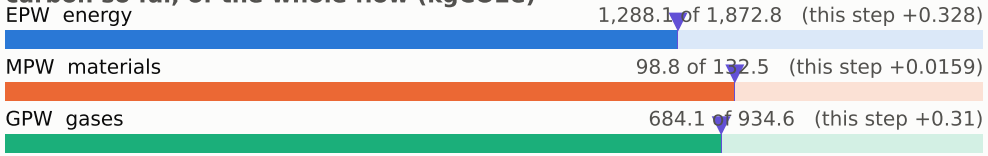

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

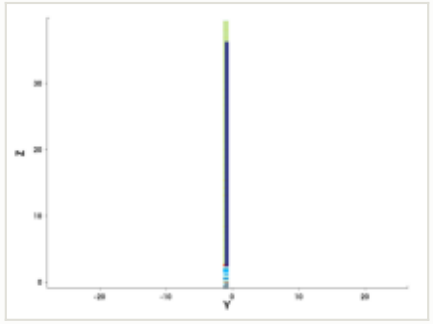

y cut at -1.035 µm

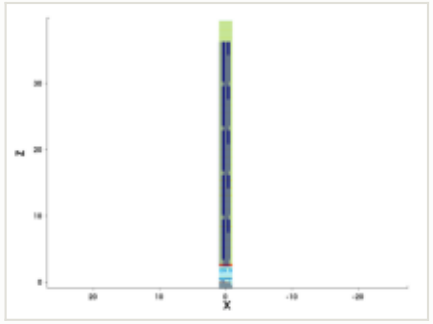

mask for this step

no mask for this step

steps by process area

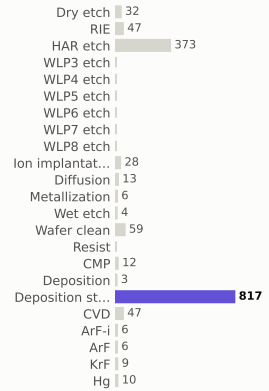

materials deposited (g)

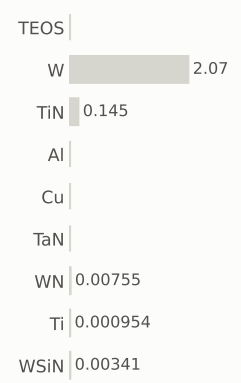

gases emitted (g)

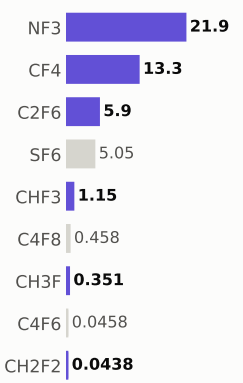

Step #19320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,071.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

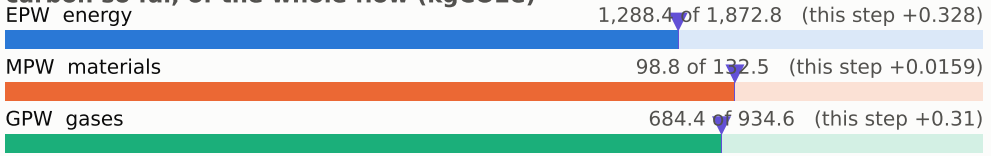

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

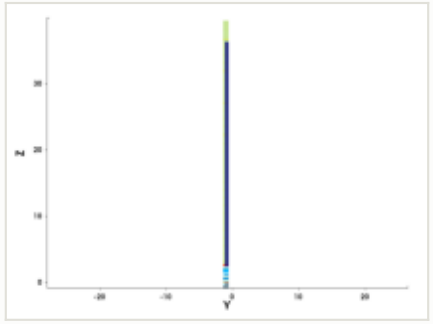

y cut at -1.035 µm

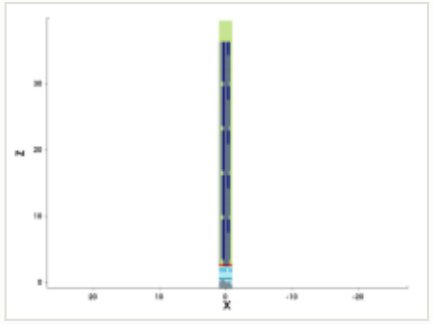

mask for this step

no mask for this step

steps by process area

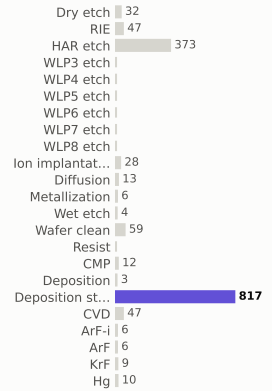

materials deposited (g)

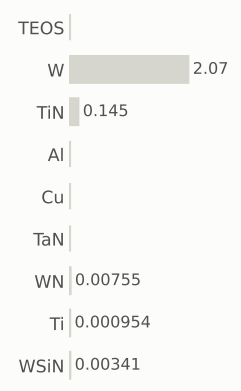

gases emitted (g)

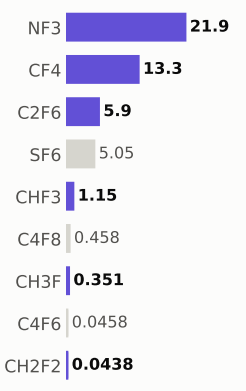

Step #19330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,072.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

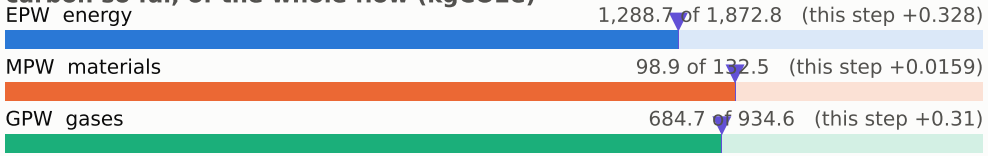

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

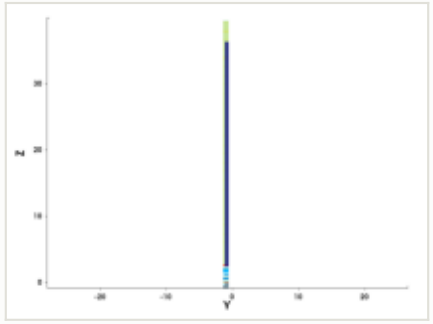

y cut at -1.035 µm

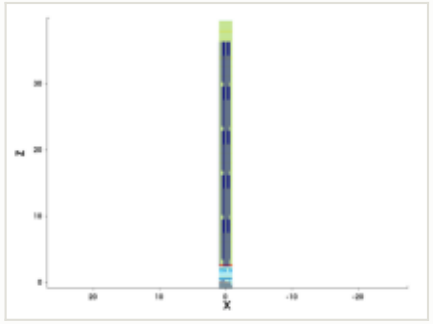

mask for this step

no mask for this step

steps by process area

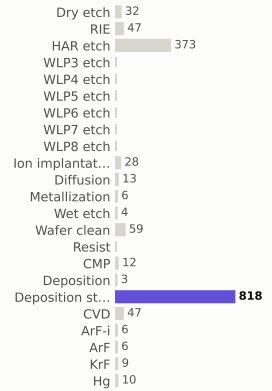

materials deposited (g)

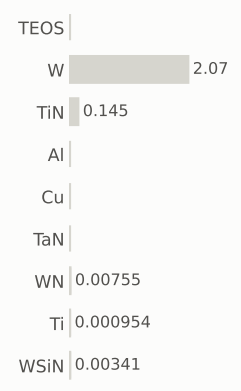

gases emitted (g)

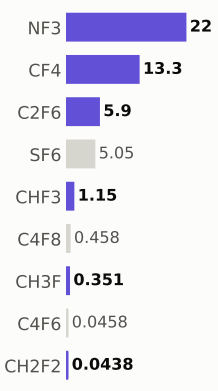

Step #19340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,073.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

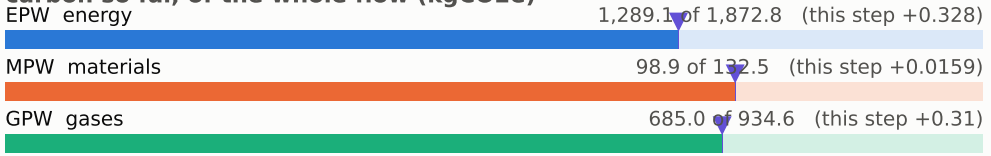

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

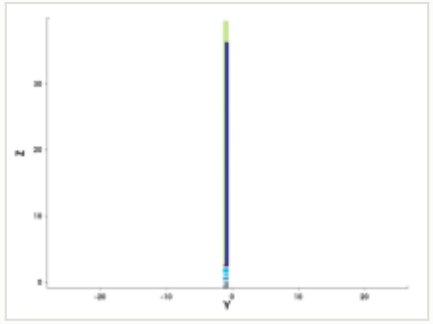

y cut at -1.035 µm

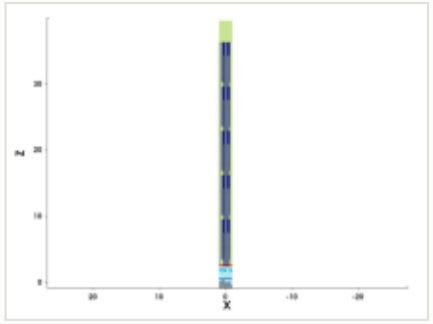

mask for this step

no mask for this step

steps by process area

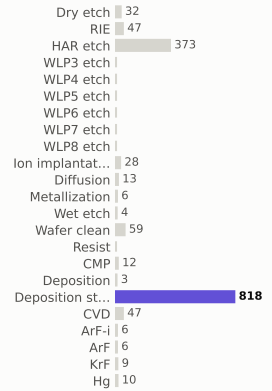

materials deposited (g)

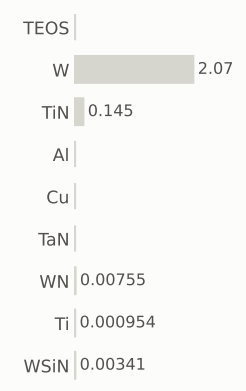

gases emitted (g)

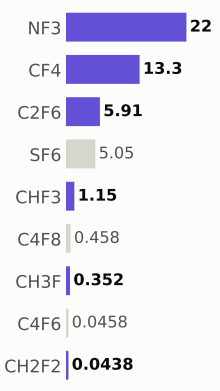

Step #19350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,073.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

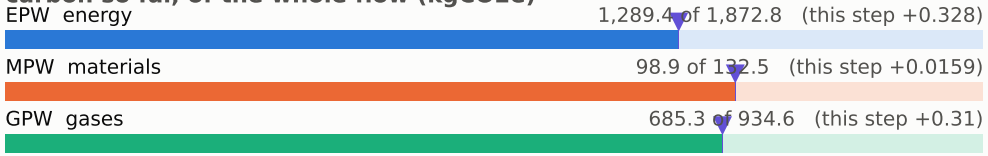

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

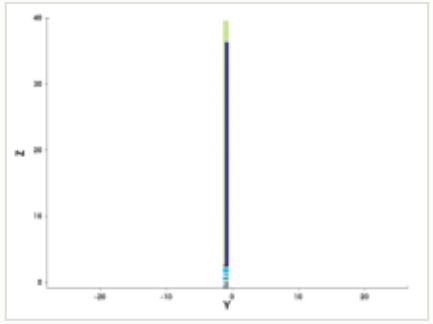

y cut at -1.035 µm

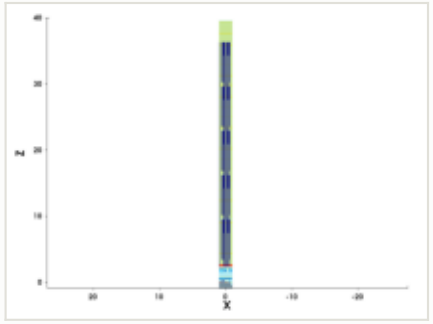

mask for this step

no mask for this step

steps by process area

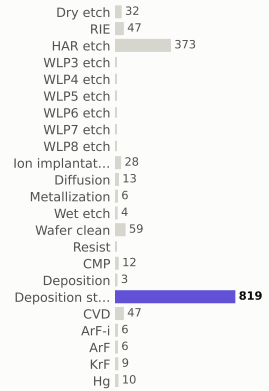

materials deposited (g)

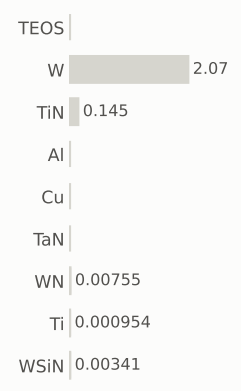

gases emitted (g)

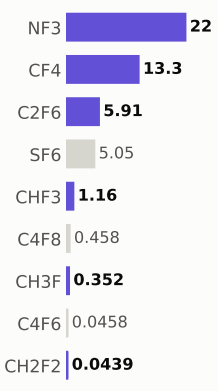

Step #19360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,074.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

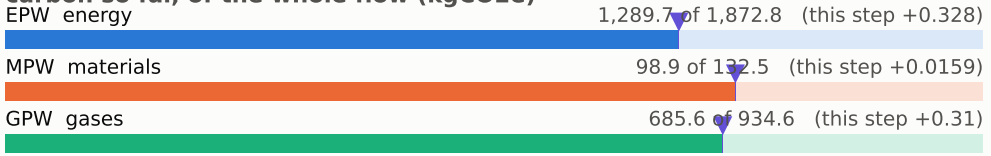

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

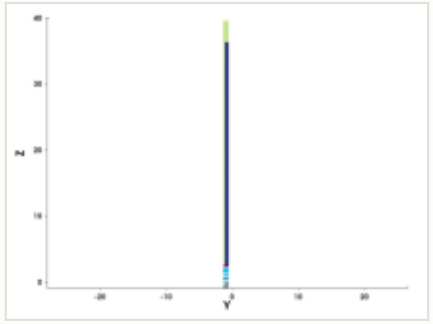

y cut at -1.035 µm

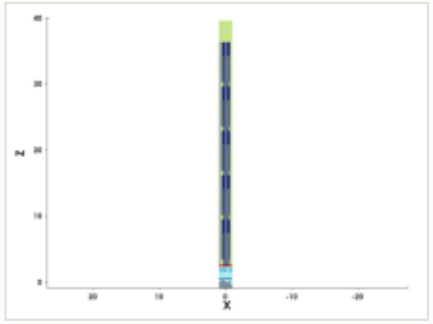

mask for this step

no mask for this step

steps by process area

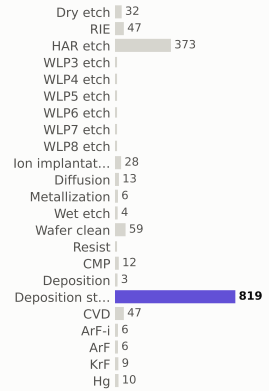

materials deposited (g)

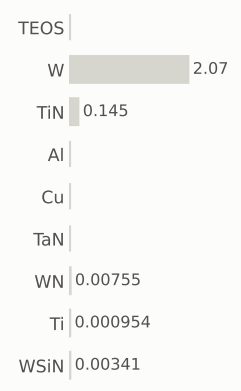

gases emitted (g)

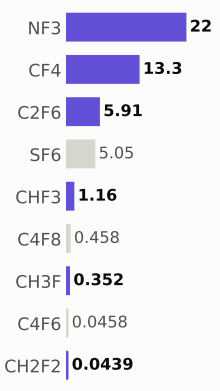

Step #19370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,074.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

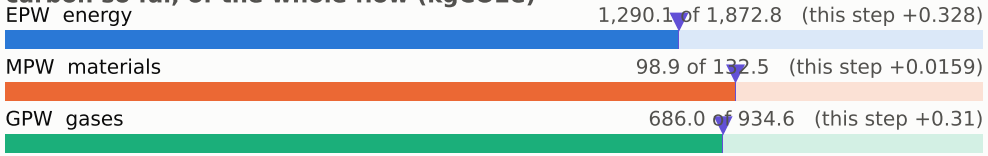

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

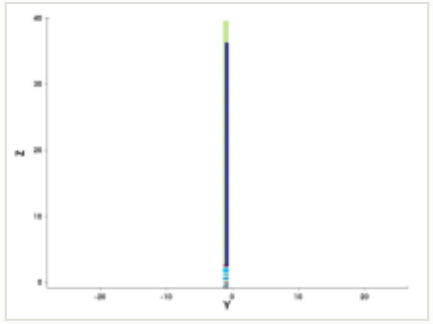

y cut at -1.035 µm

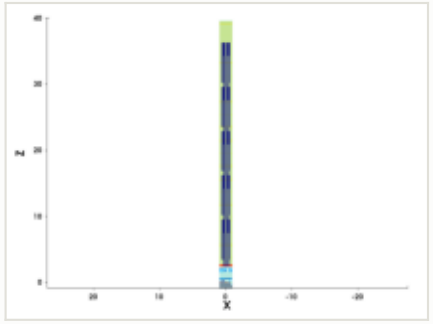

mask for this step

no mask for this step

steps by process area

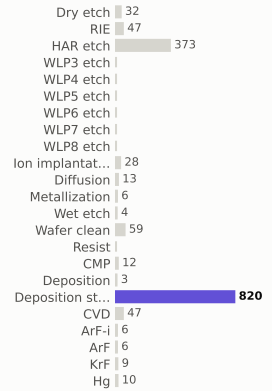

materials deposited (g)

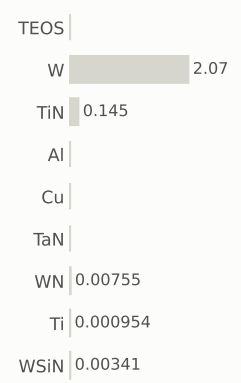

gases emitted (g)

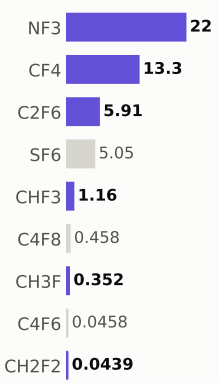

Step #19380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,075.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

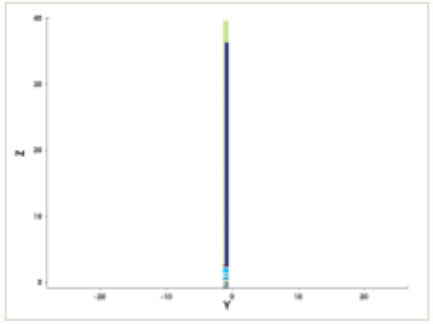

y cut at -1.035 µm

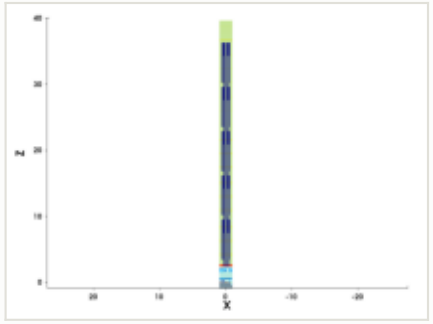

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

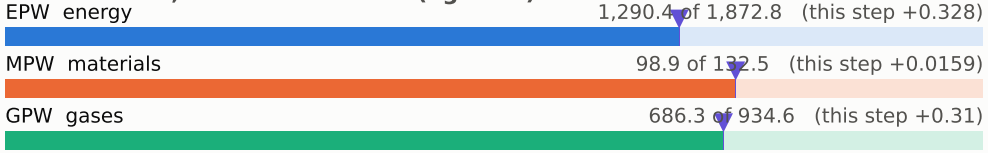

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

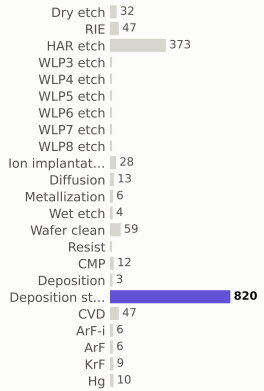

materials deposited (g)

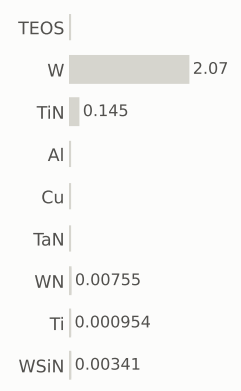

gases emitted (g)

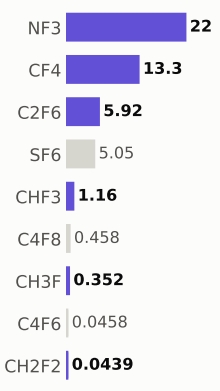

Step #19390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,076.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

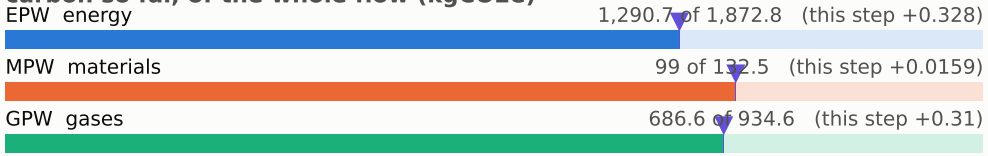

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

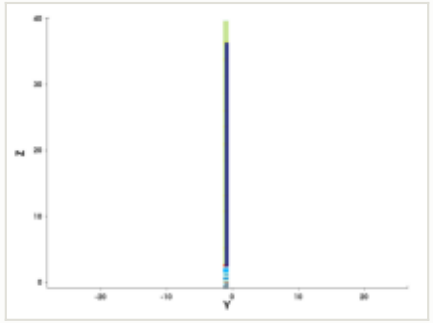

y cut at -1.035 µm

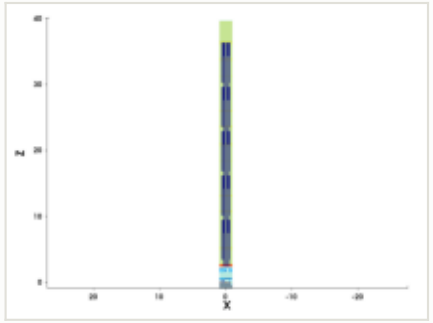

mask for this step

no mask for this step

steps by process area

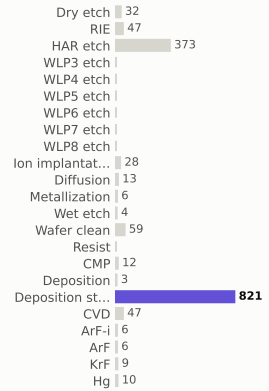

materials deposited (g)

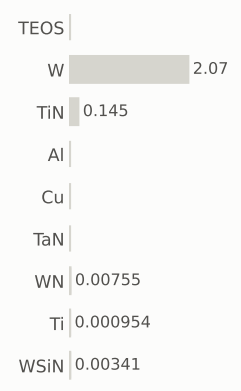

gases emitted (g)

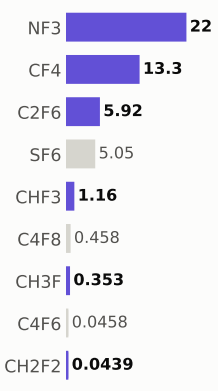

Step #19400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,076.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

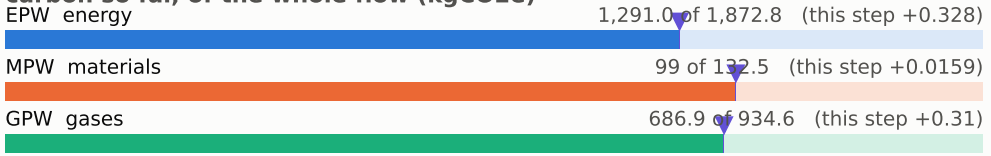

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

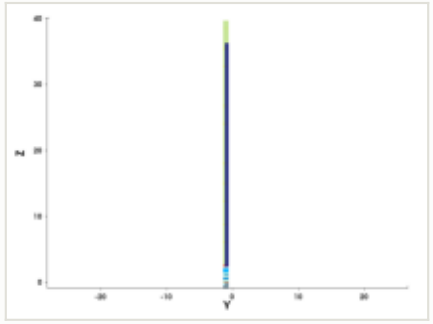

y cut at -1.035 µm

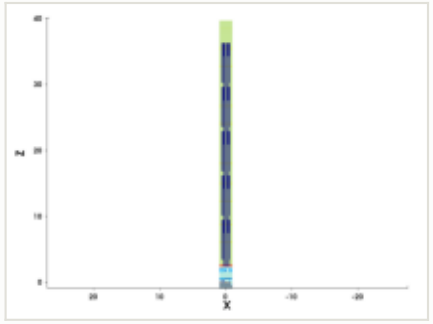

mask for this step

no mask for this step

steps by process area

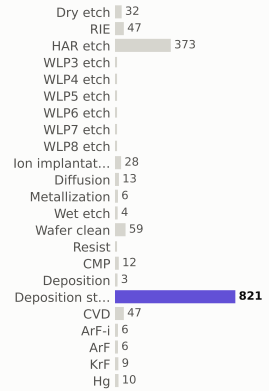

materials deposited (g)

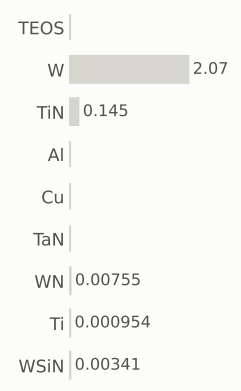

gases emitted (g)

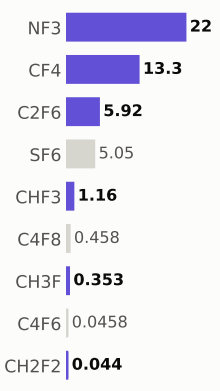

Step #19410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,077.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

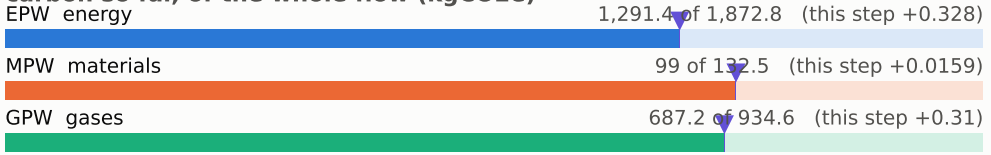

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

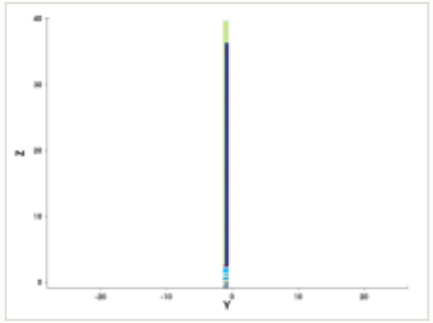

y cut at -1.035 µm

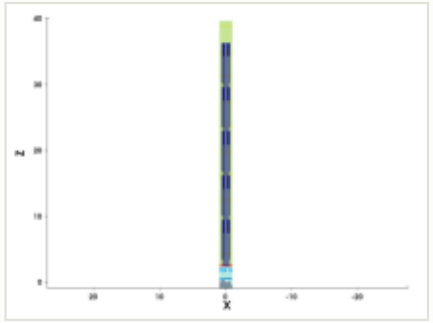

mask for this step

no mask for this step

steps by process area

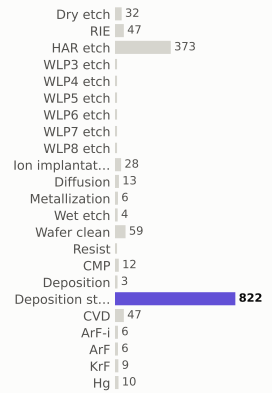

materials deposited (g)

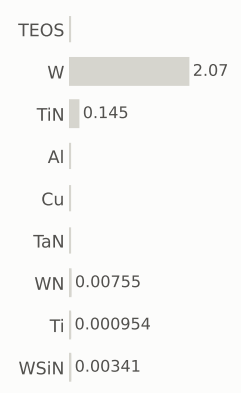

gases emitted (g)

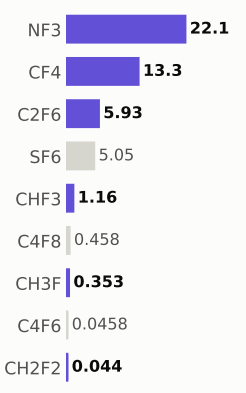

Step #19420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,078.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

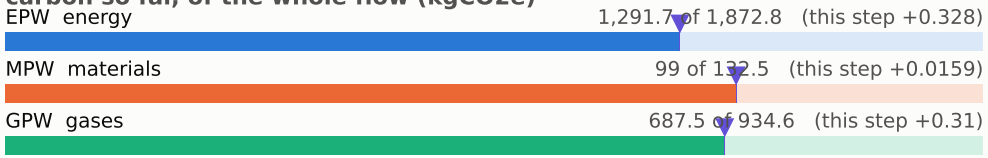

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

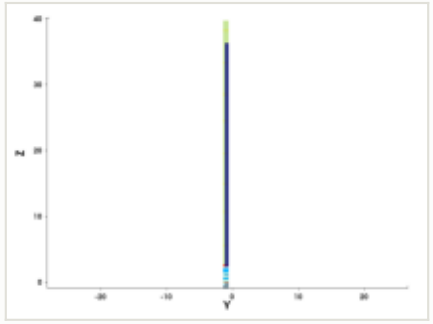

y cut at -1.035 µm

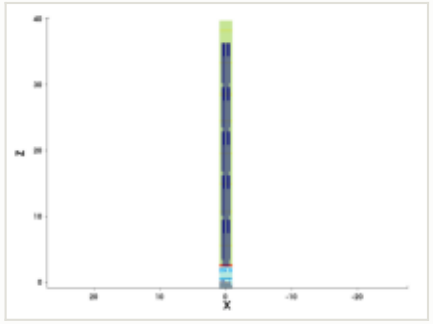

mask for this step

no mask for this step

steps by process area

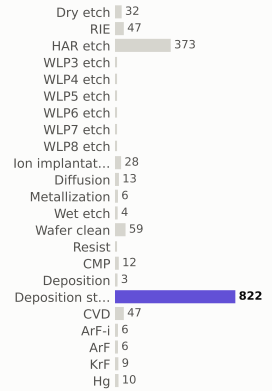

materials deposited (g)

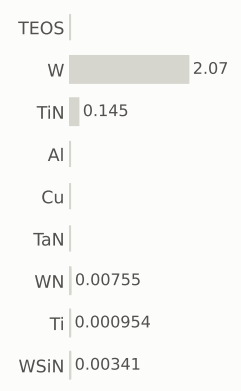

gases emitted (g)

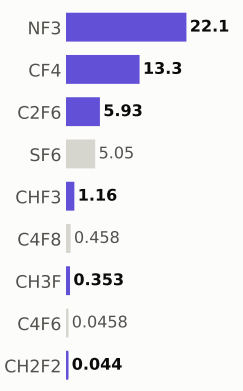

Step #19430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,078.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

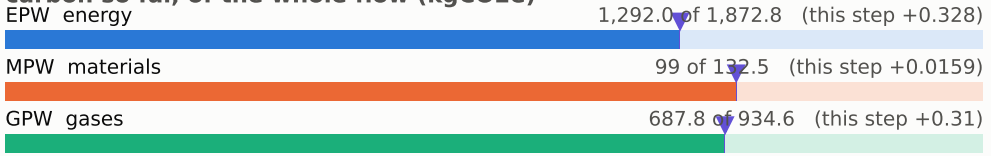

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

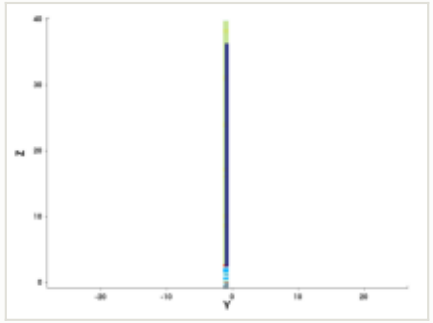

y cut at -1.035 µm

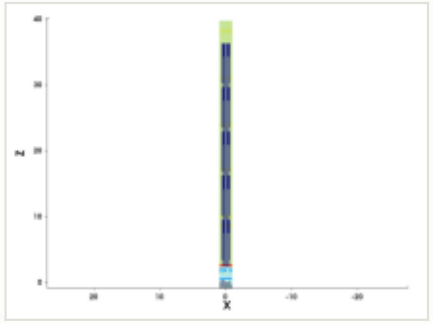

mask for this step

no mask for this step

steps by process area

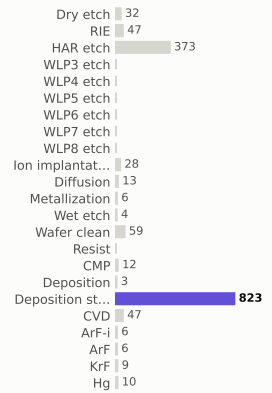

materials deposited (g)

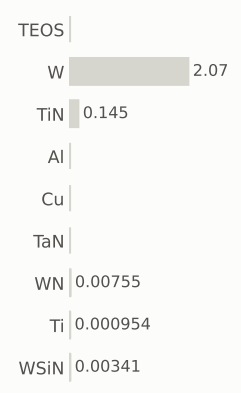

gases emitted (g)

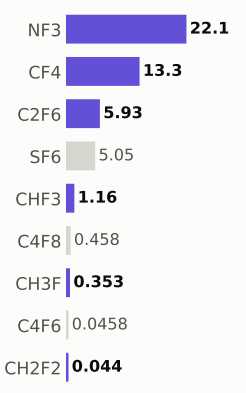

Step #19440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,079.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

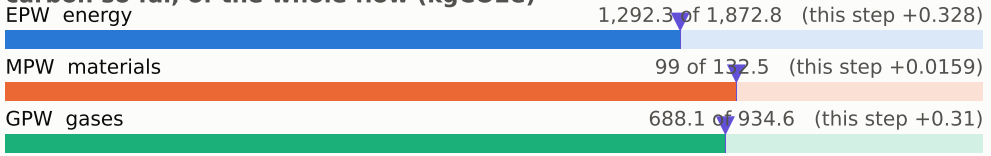

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

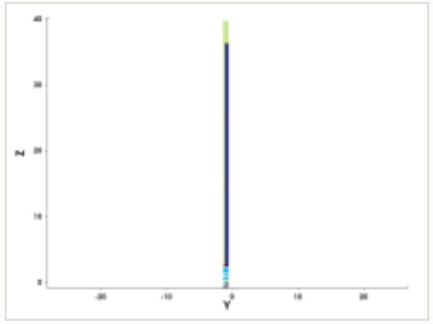

y cut at -1.035 µm

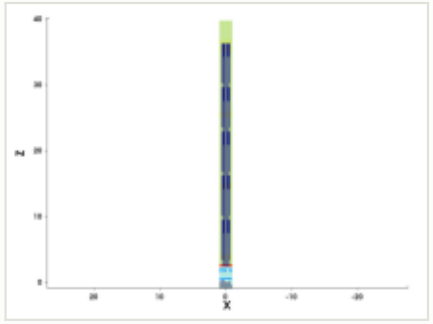

mask for this step

no mask for this step

steps by process area

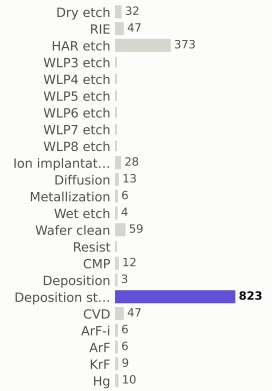

materials deposited (g)

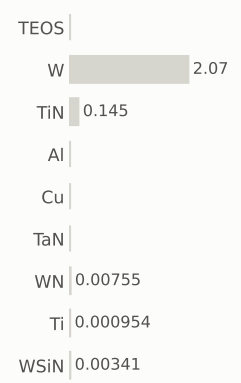

gases emitted (g)

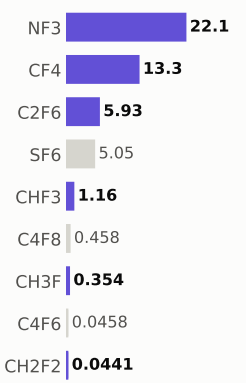

Step #19450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,080.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

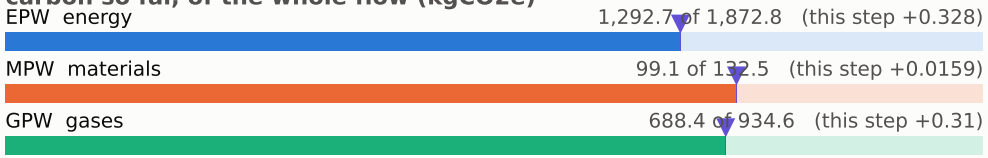

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

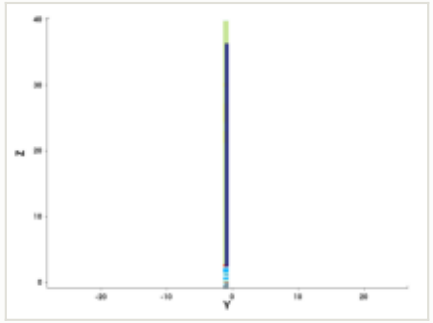

y cut at -1.035 µm

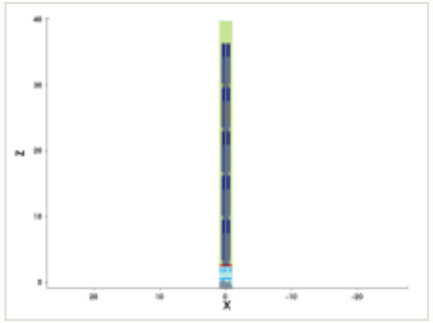

mask for this step

no mask for this step

steps by process area

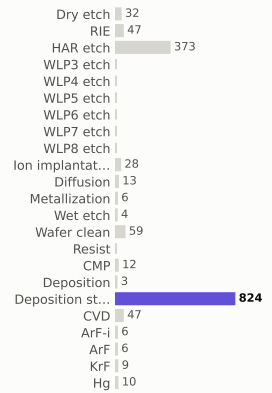

materials deposited (g)

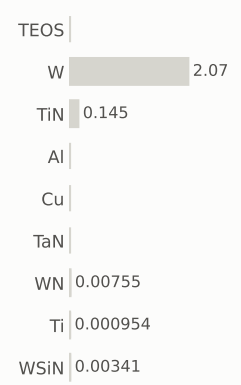

gases emitted (g)

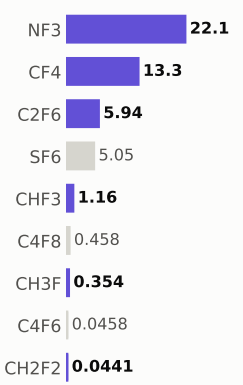

Step #19460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,080.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

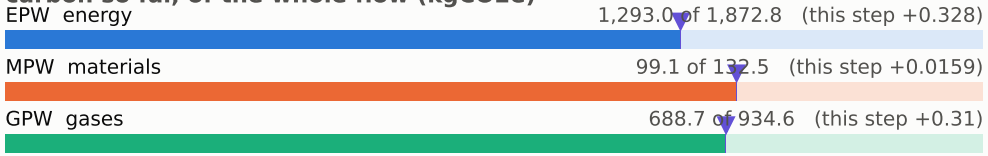

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

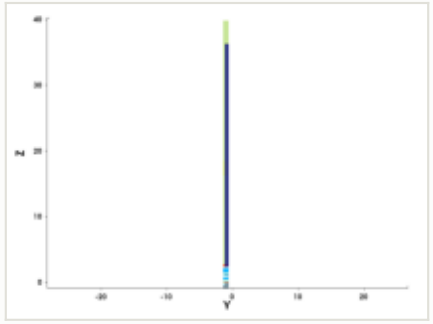

y cut at -1.035 µm

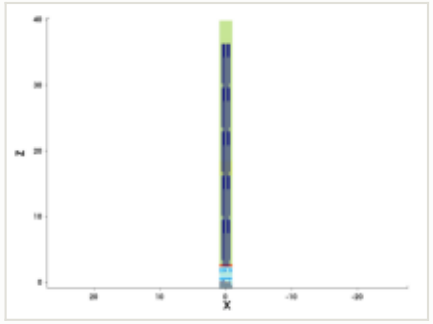

mask for this step

no mask for this step

steps by process area

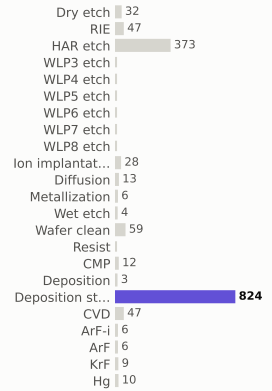

materials deposited (g)

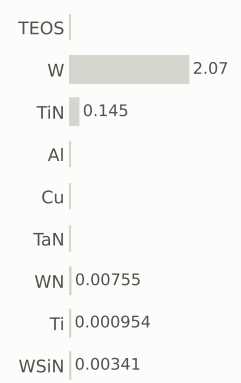

gases emitted (g)

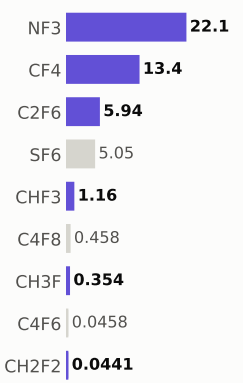

Step #19470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,081.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

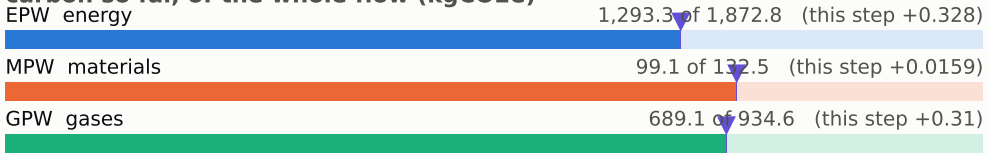

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

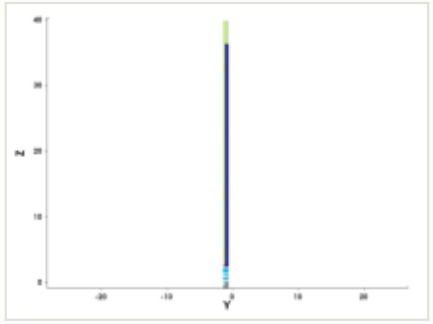

y cut at -1.035 µm

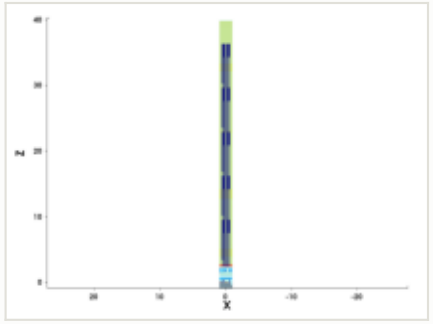

mask for this step

no mask for this step

steps by process area

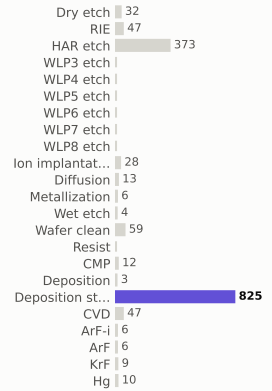

materials deposited (g)

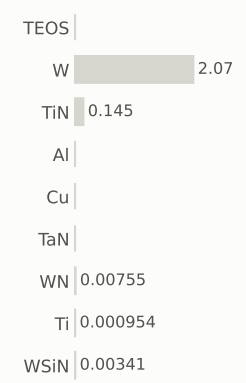

gases emitted (g)

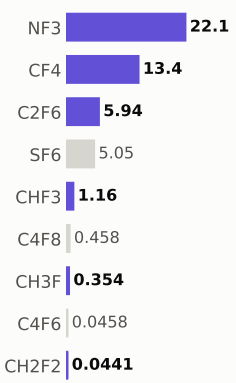

Step #19480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,082.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

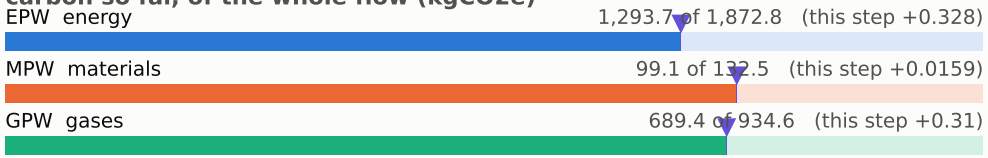

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

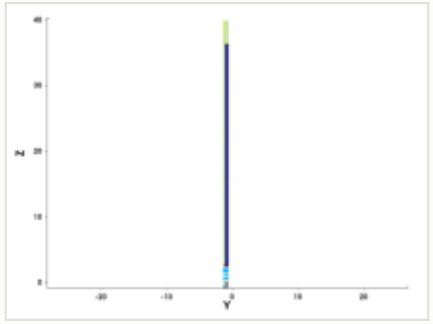

y cut at -1.035 µm

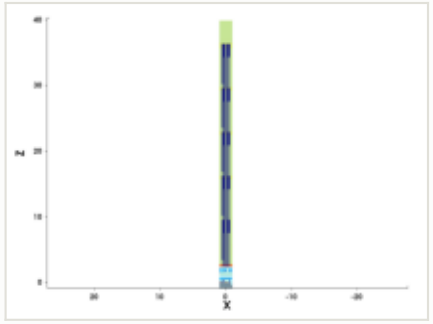

mask for this step

no mask for this step

steps by process area

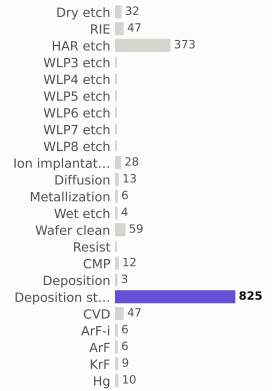

materials deposited (g)

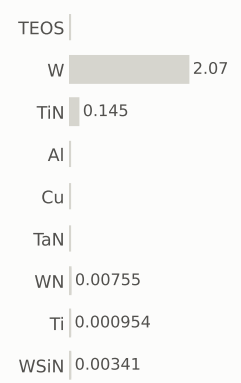

gases emitted (g)

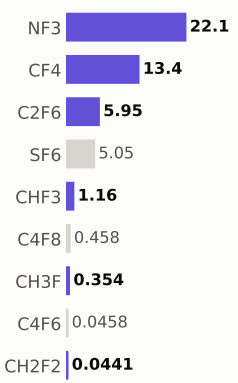

Step #19490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,082.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

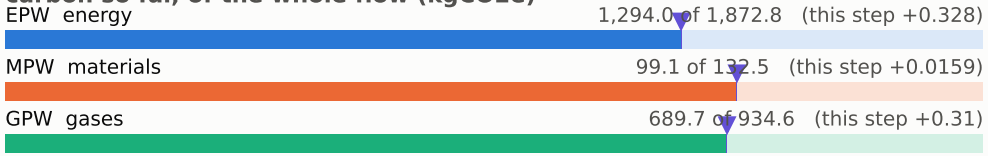

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

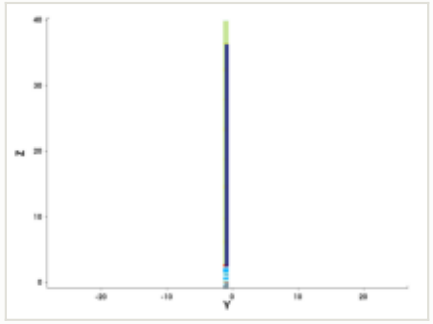

y cut at -1.035 µm

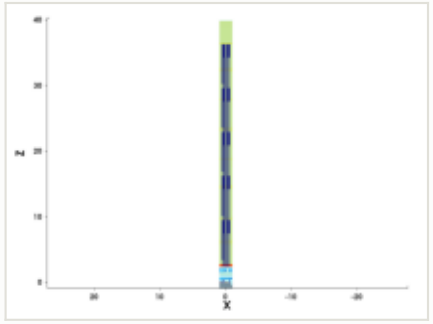

mask for this step

no mask for this step

steps by process area

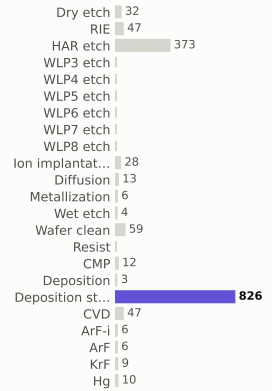

materials deposited (g)

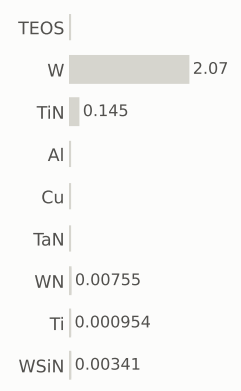

gases emitted (g)

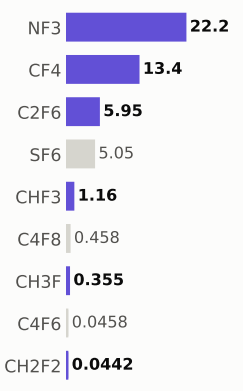

Step #19500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,083.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

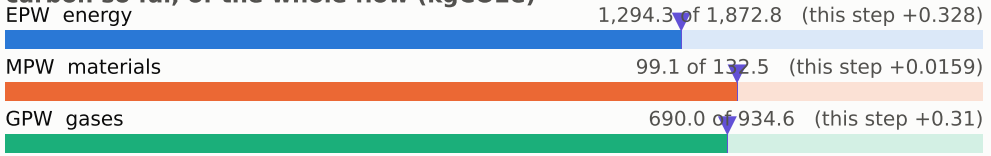

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

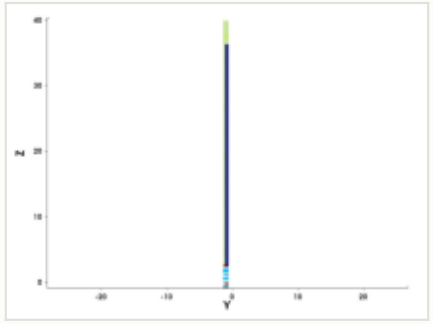

y cut at -1.035 µm

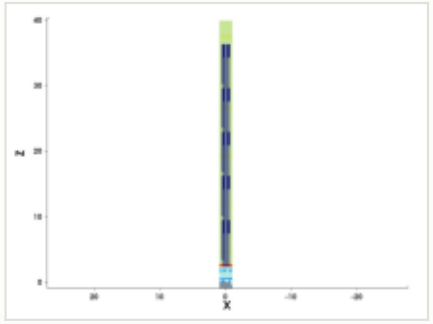

mask for this step

no mask for this step

steps by process area

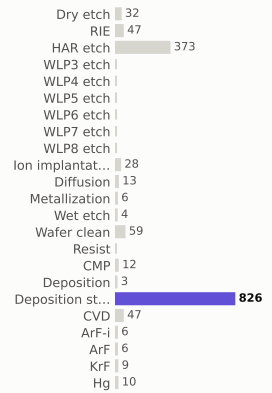

materials deposited (g)

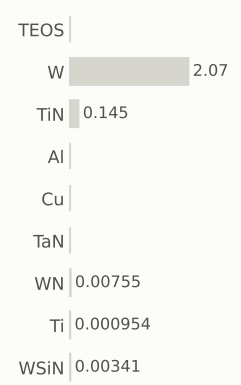

gases emitted (g)

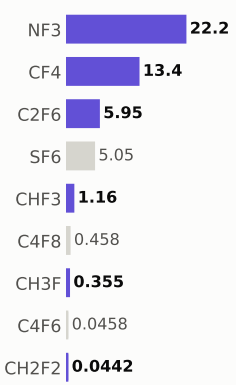

Step #19510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,084.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

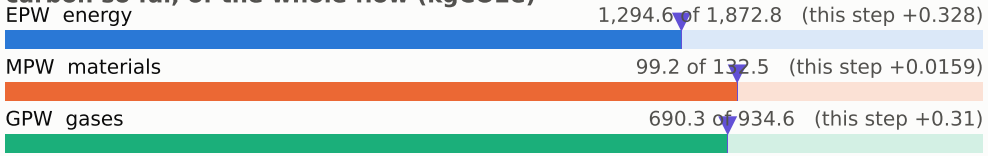

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

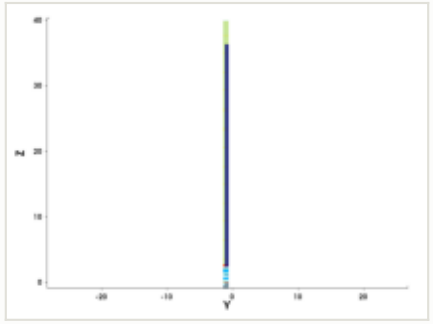

y cut at -1.035 µm

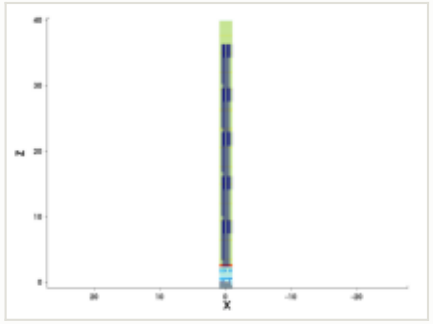

mask for this step

no mask for this step

steps by process area

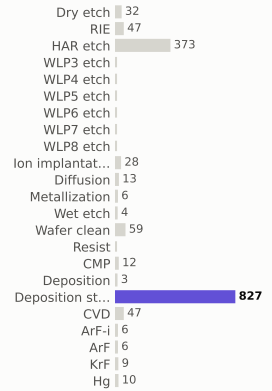

materials deposited (g)

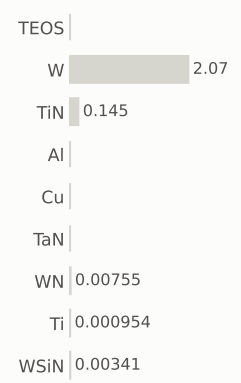

gases emitted (g)

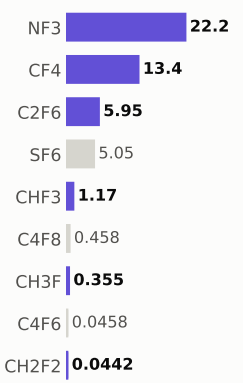

Step #19520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,084.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

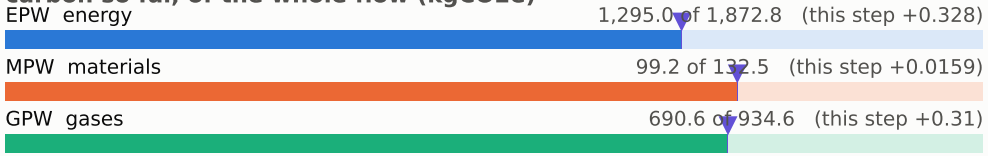

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

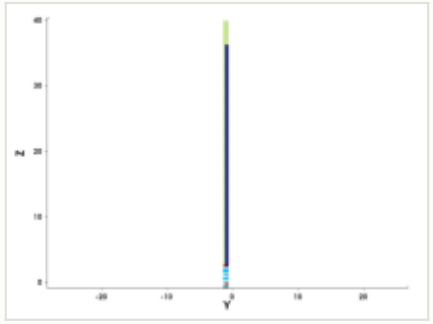

y cut at -1.035 µm

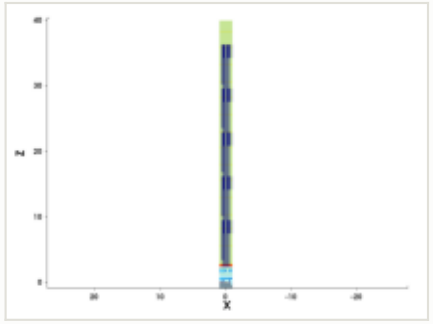

mask for this step

no mask for this step

steps by process area

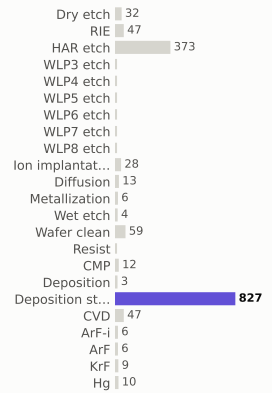

materials deposited (g)

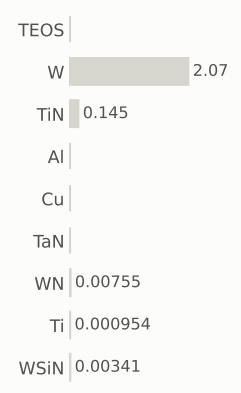

gases emitted (g)

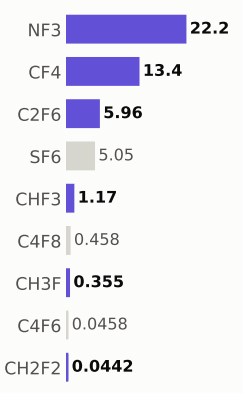

Step #19530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,085.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

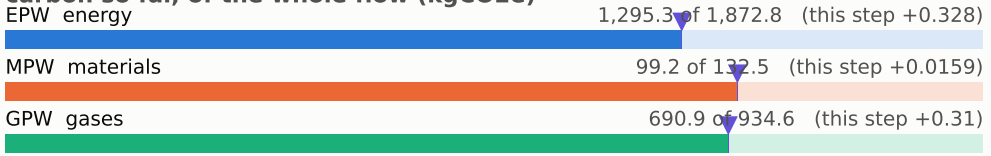

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

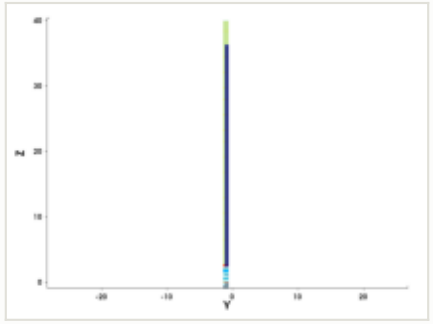

y cut at -1.035 µm

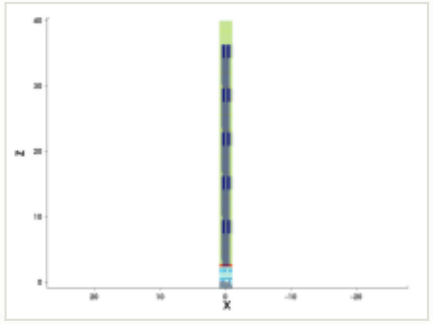

mask for this step

no mask for this step

steps by process area

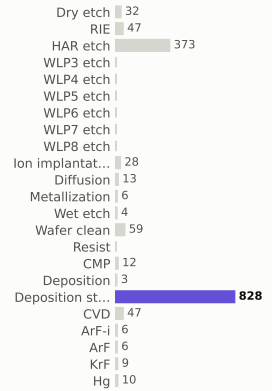

materials deposited (g)

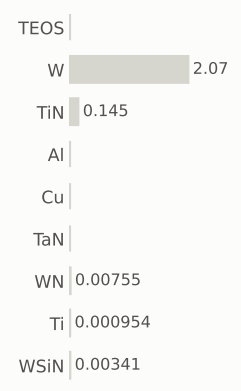

gases emitted (g)

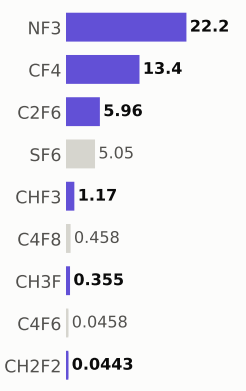

Step #19540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,086.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

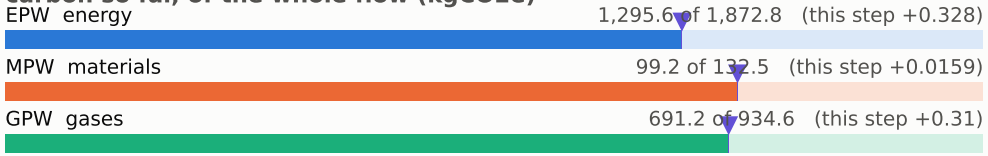

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

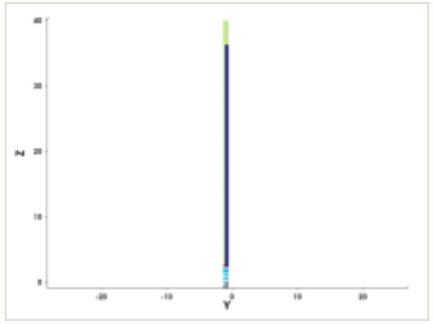

y cut at -1.035 µm

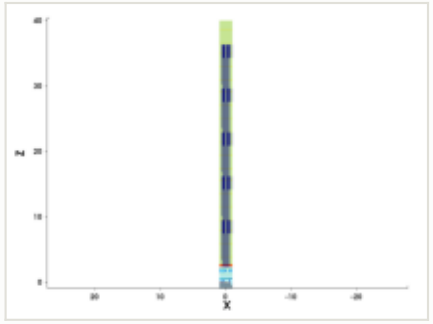

mask for this step

no mask for this step

steps by process area

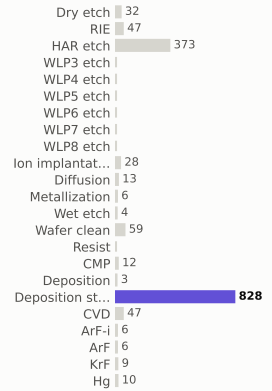

materials deposited (g)

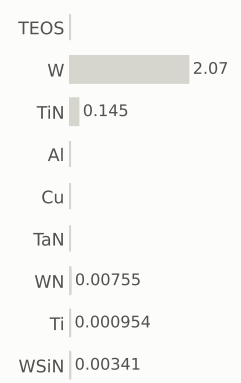

gases emitted (g)

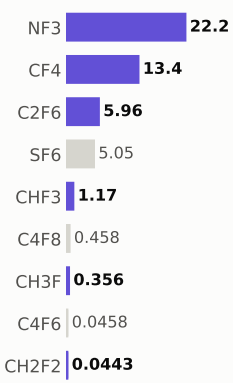

Step #19550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,086.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

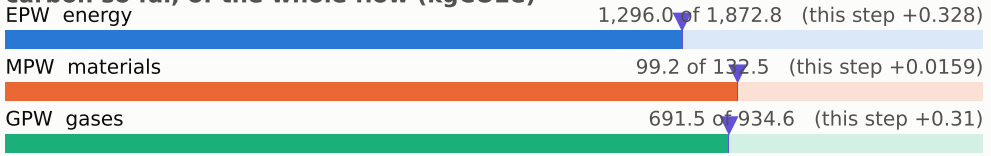

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

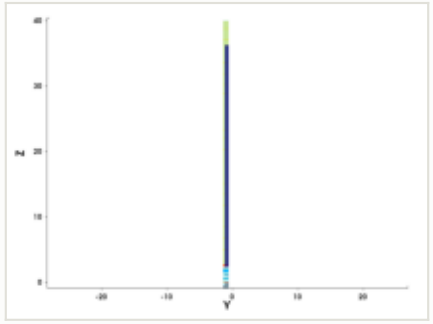

y cut at -1.035 µm

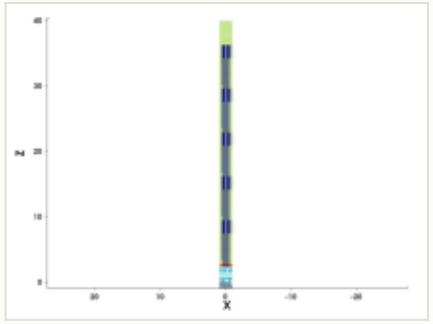

mask for this step

no mask for this step

steps by process area

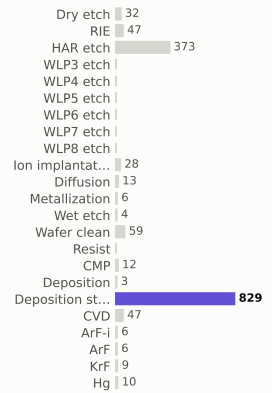

materials deposited (g)

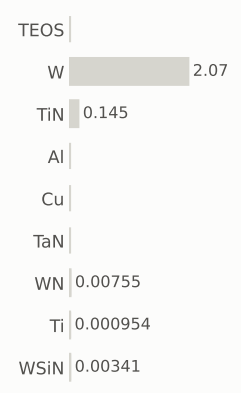

gases emitted (g)

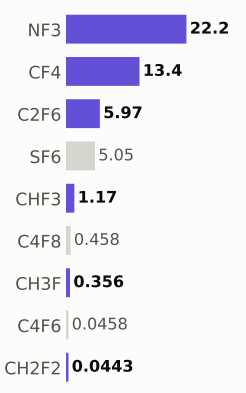

Step #19560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,087.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

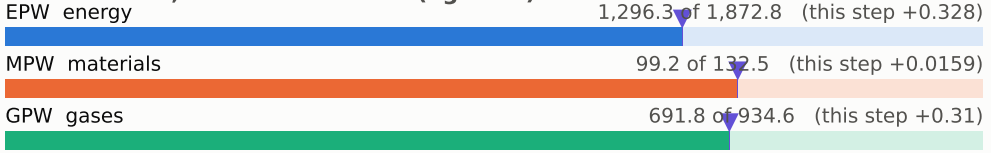

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

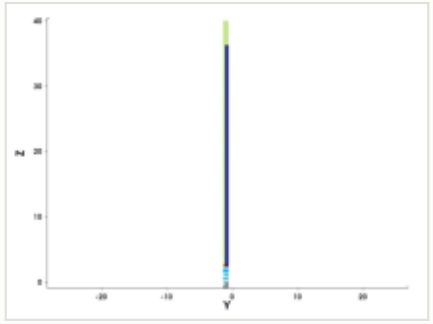

y cut at -1.035 µm

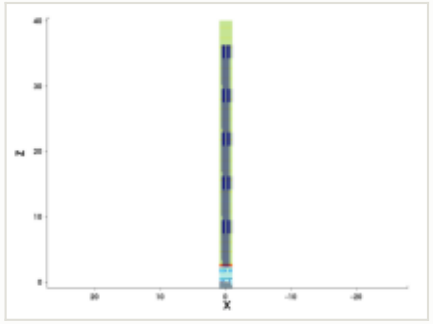

mask for this step

no mask for this step

steps by process area

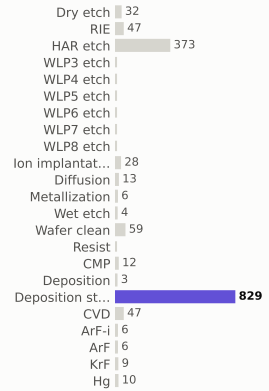

materials deposited (g)

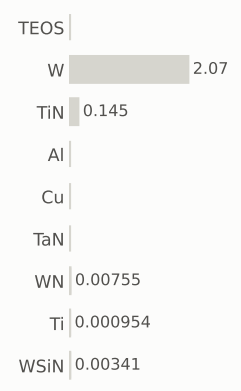

gases emitted (g)

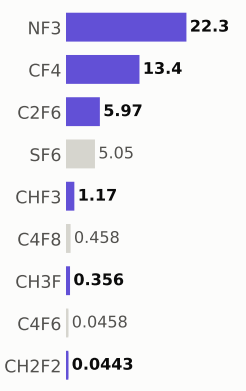

Step #19570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,088.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

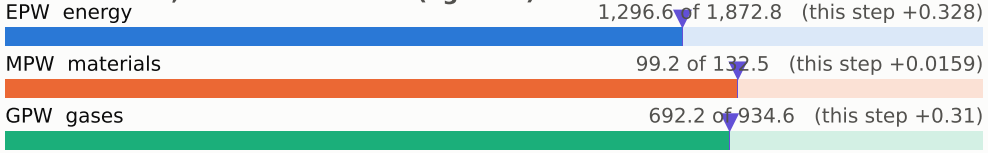

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

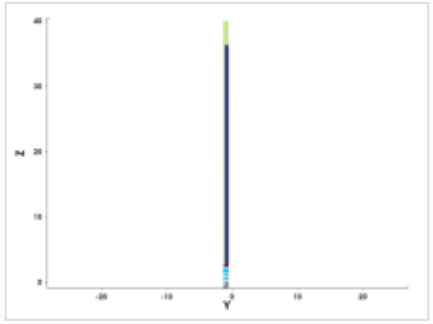

y cut at -1.035 µm

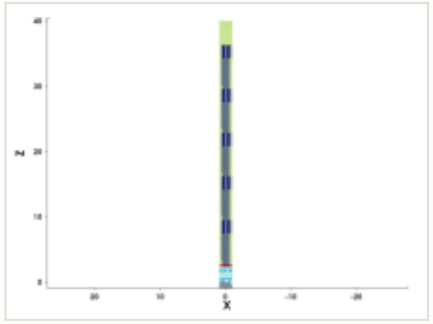

mask for this step

no mask for this step

steps by process area

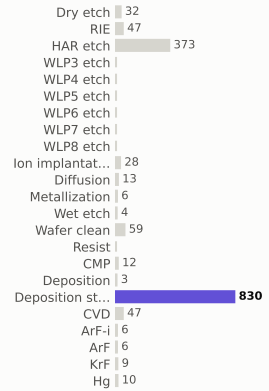

materials deposited (g)

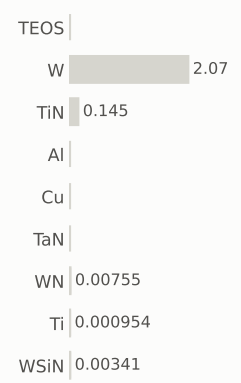

gases emitted (g)

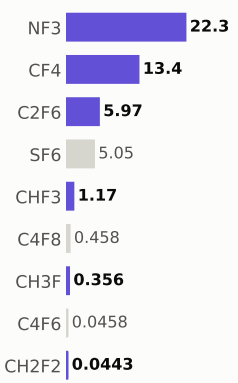

Step #19580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,088.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

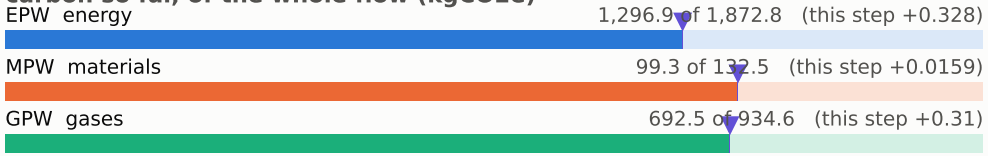

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

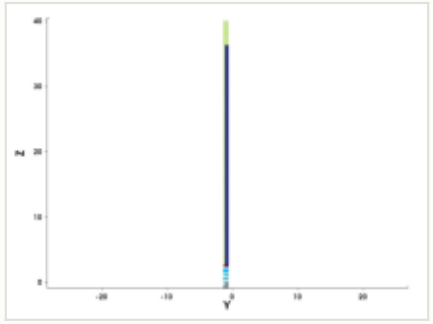

y cut at -1.035 µm

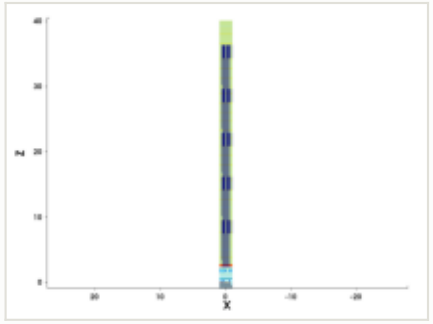

mask for this step

no mask for this step

steps by process area

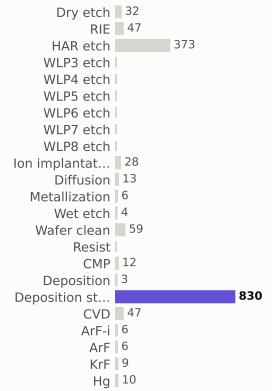

materials deposited (g)

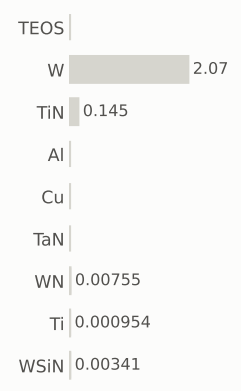

gases emitted (g)

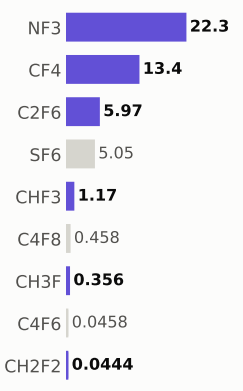

Step #19590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,089.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

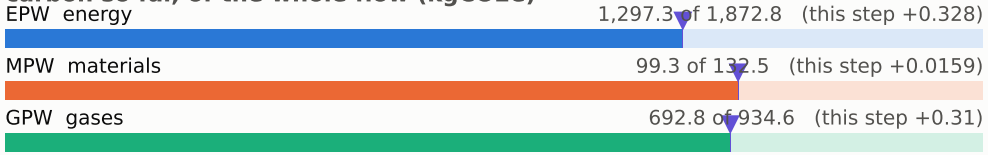

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

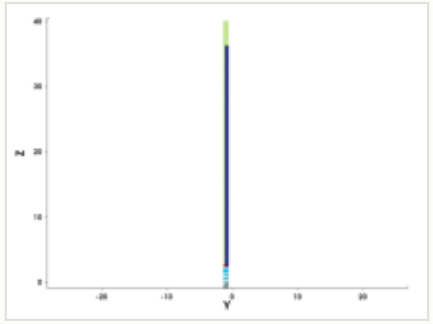

y cut at -1.035 µm

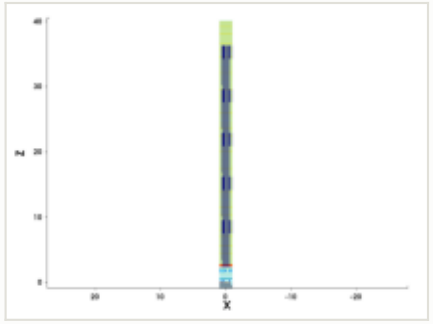

mask for this step

no mask for this step

steps by process area

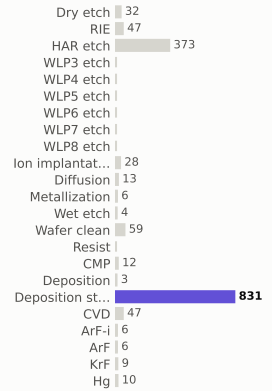

materials deposited (g)

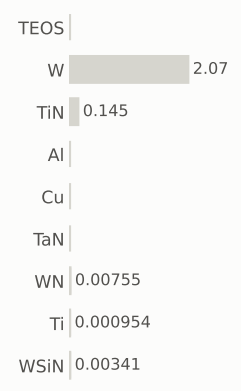

gases emitted (g)

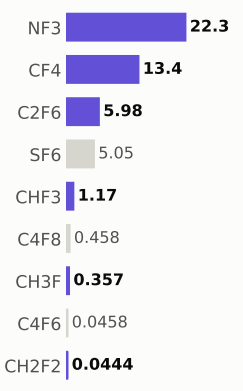

Step #19600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,090.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

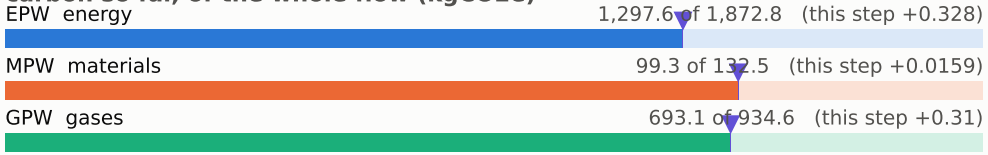

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

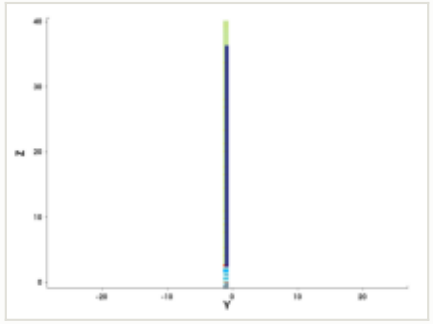

y cut at -1.035 µm

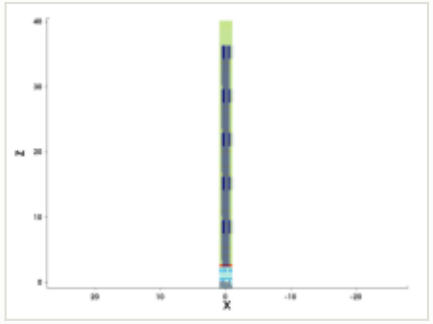

mask for this step

no mask for this step

steps by process area

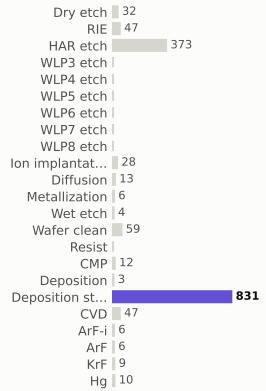

materials deposited (g)

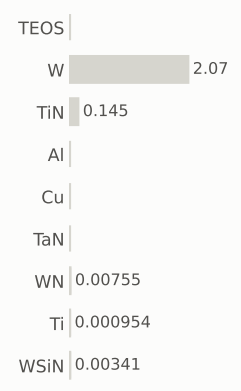

gases emitted (g)

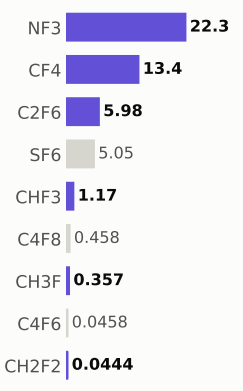

Step #19610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,090.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

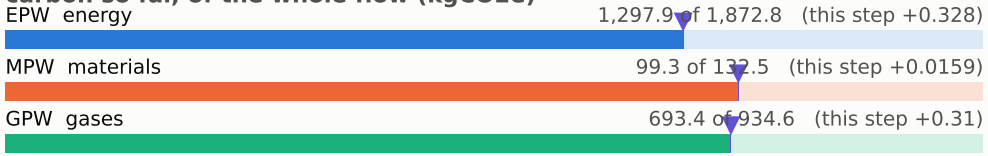

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

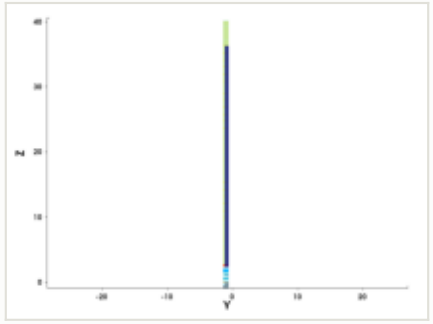

y cut at -1.035 µm

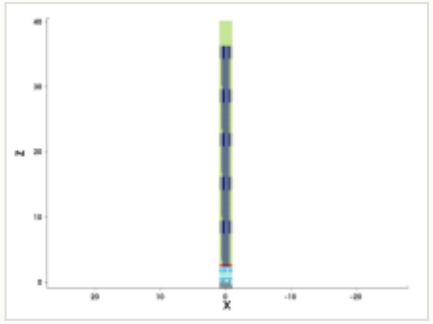

mask for this step

no mask for this step

steps by process area

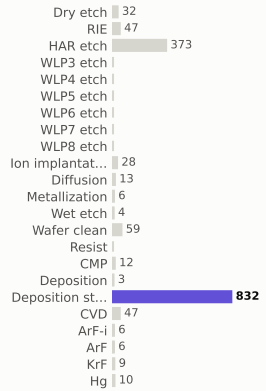

materials deposited (g)

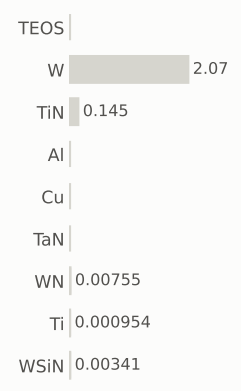

gases emitted (g)

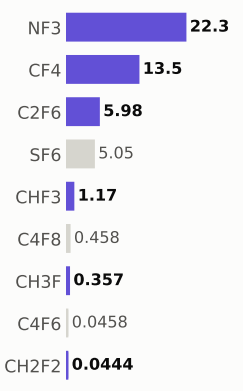

Step #19620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,091.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

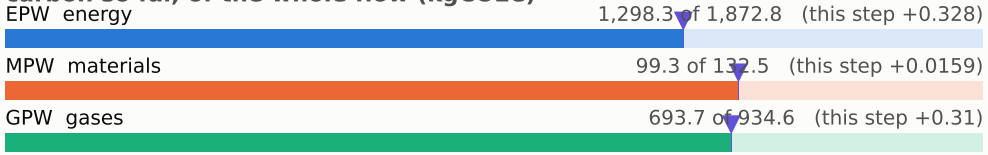

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

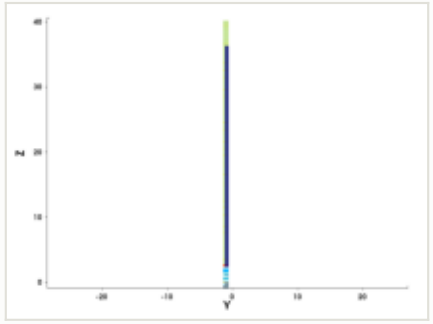

y cut at -1.035 µm

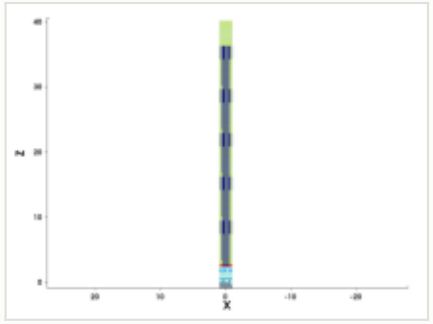

mask for this step

no mask for this step

steps by process area

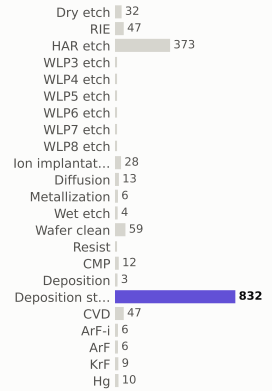

materials deposited (g)

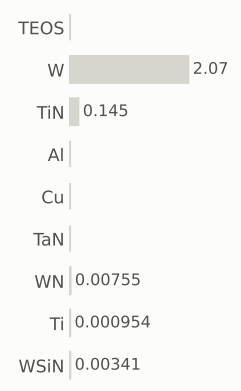

gases emitted (g)

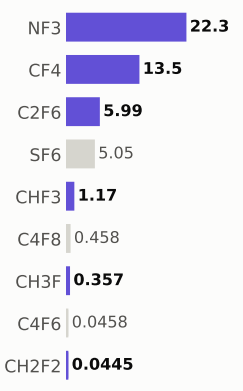

Step #19630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,091.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

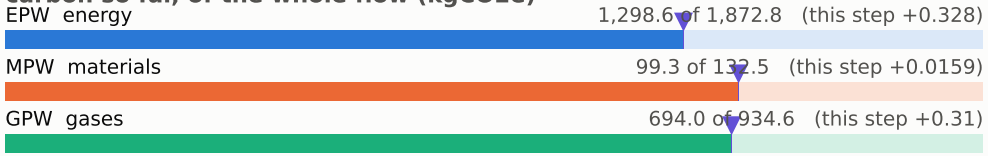

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

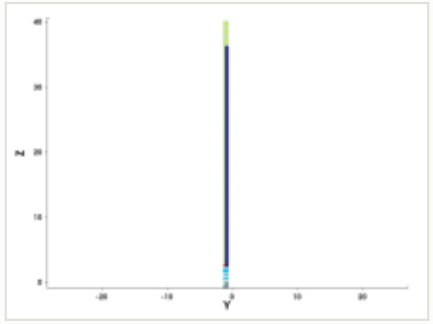

y cut at -1.035 µm

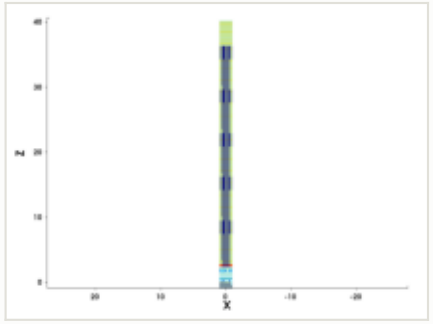

mask for this step

no mask for this step

steps by process area

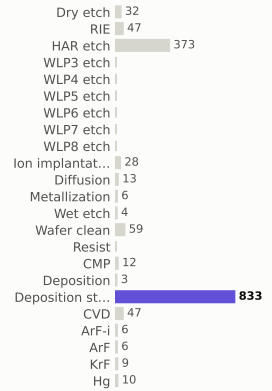

materials deposited (g)

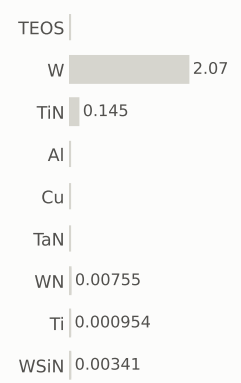

gases emitted (g)

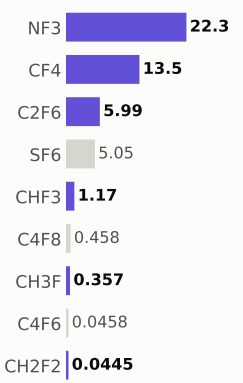

Step #19640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,092.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

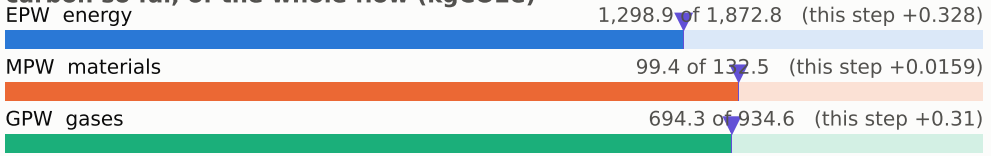

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

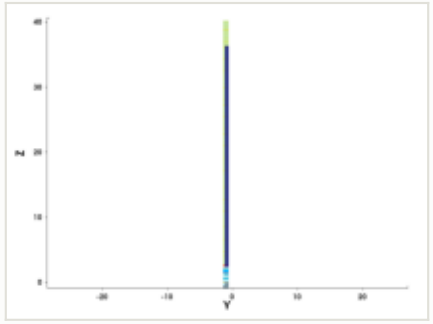

y cut at -1.035 µm

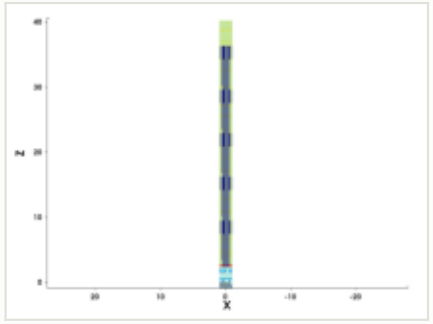

mask for this step

no mask for this step

steps by process area

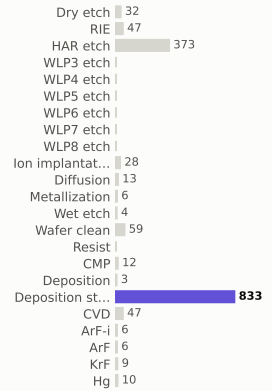

materials deposited (g)

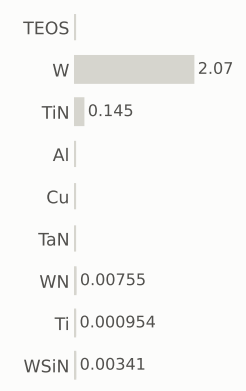

gases emitted (g)

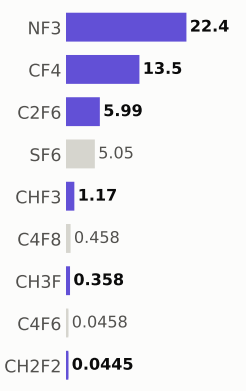

Step #19650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,093.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

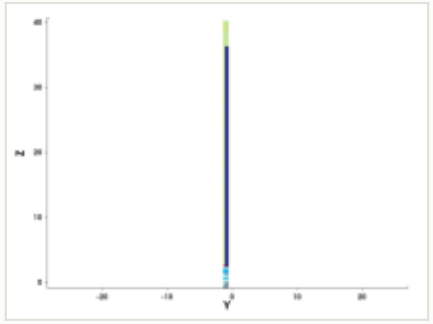

y cut at -1.035 µm

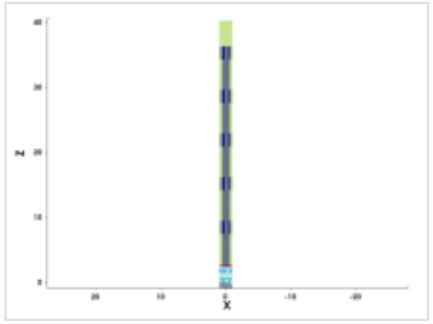

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

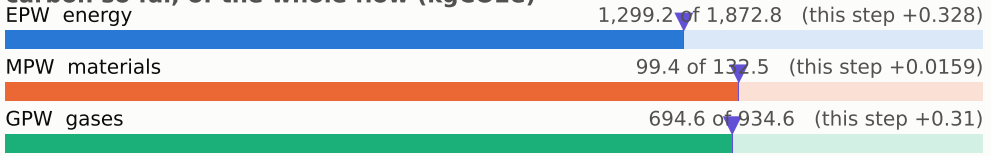

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

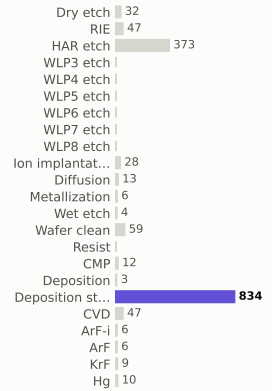

materials deposited (g)

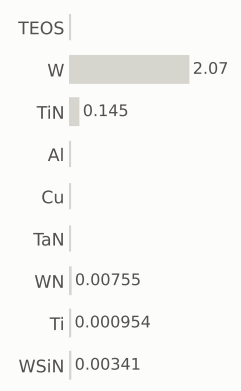

gases emitted (g)

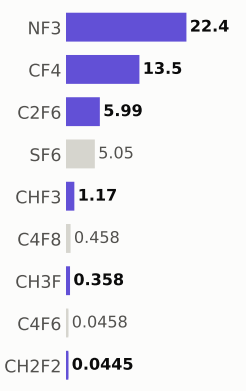

Step #19660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,093.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

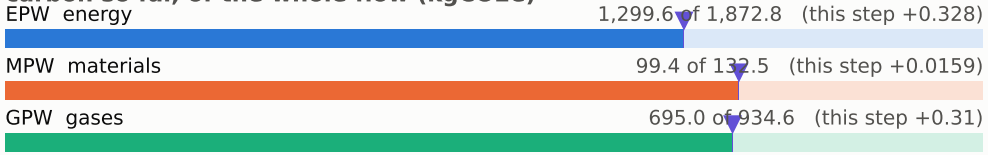

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

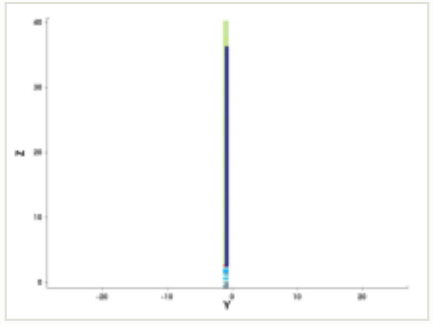

y cut at -1.035 µm

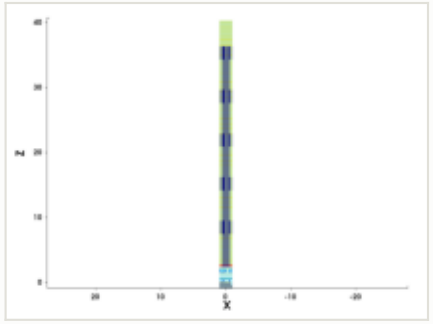

mask for this step

no mask for this step

steps by process area

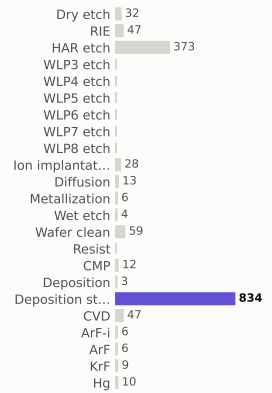

materials deposited (g)

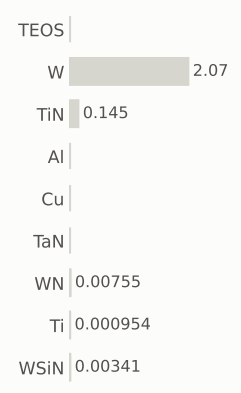

gases emitted (g)

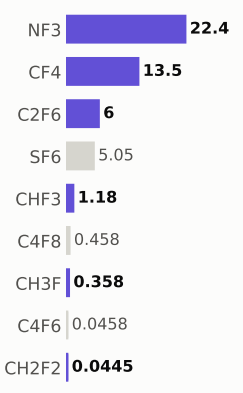

Step #19670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,094.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

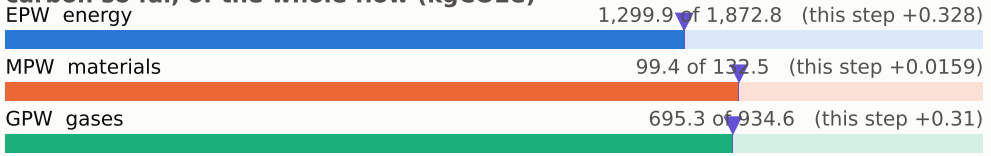

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

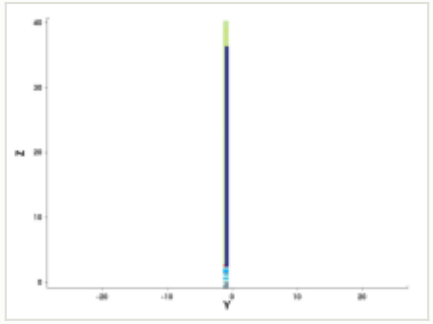

y cut at -1.035 µm

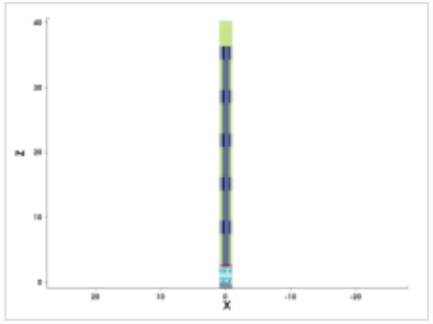

mask for this step

no mask for this step

steps by process area

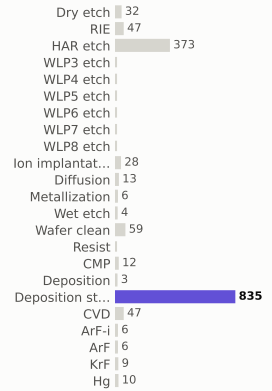

materials deposited (g)

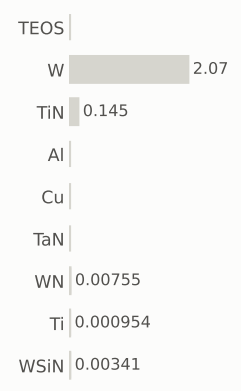

gases emitted (g)

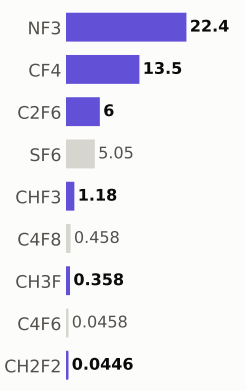

Step #19680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,095.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

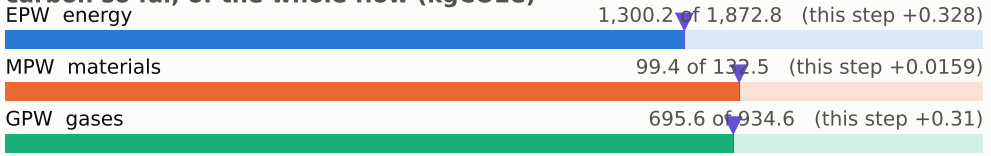

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

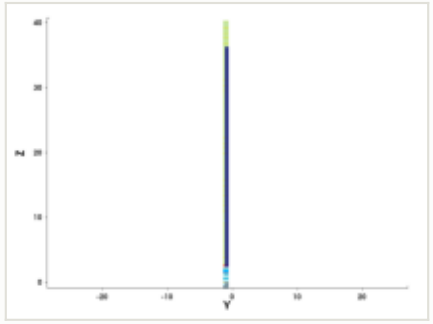

y cut at -1.035 µm

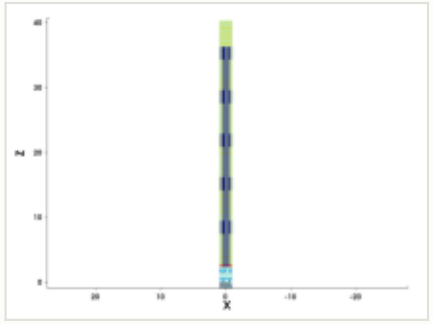

mask for this step

no mask for this step

steps by process area

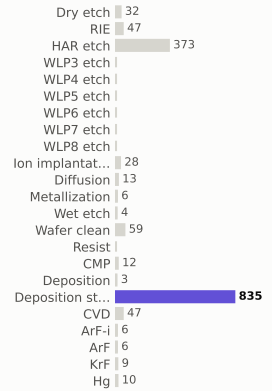

materials deposited (g)

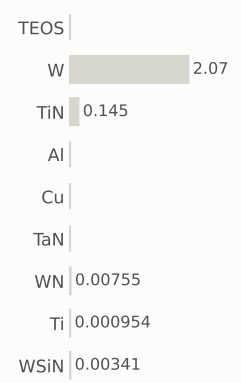

gases emitted (g)

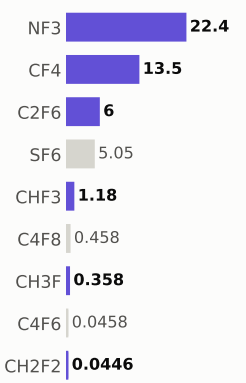

Step #19690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,095.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

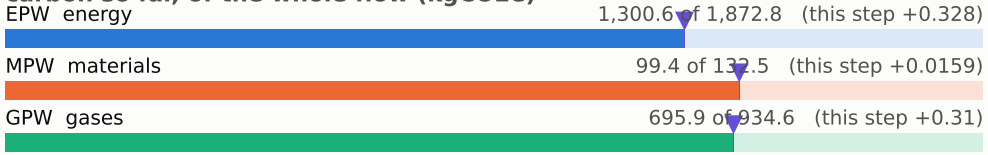

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

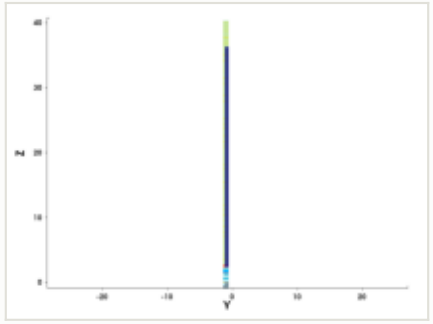

y cut at -1.035 µm

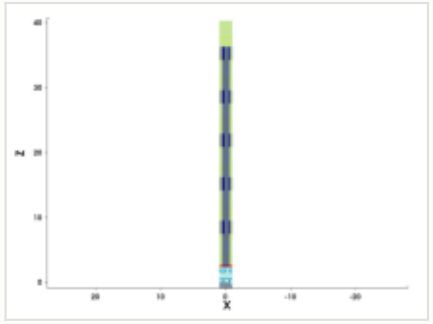

mask for this step

no mask for this step

steps by process area

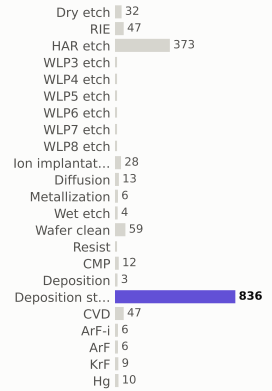

materials deposited (g)

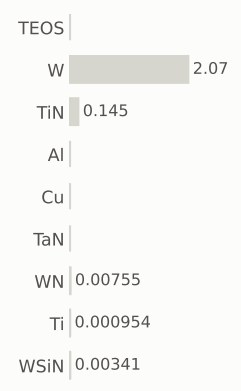

gases emitted (g)

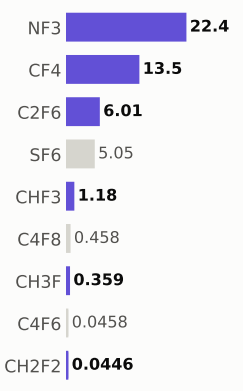

Step #19700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,096.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

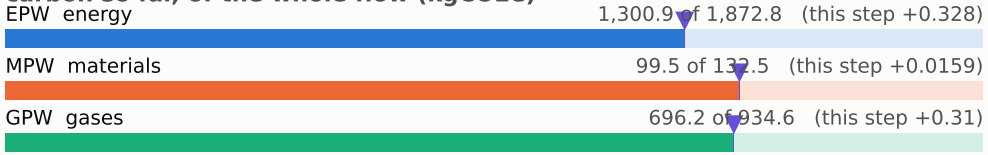

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

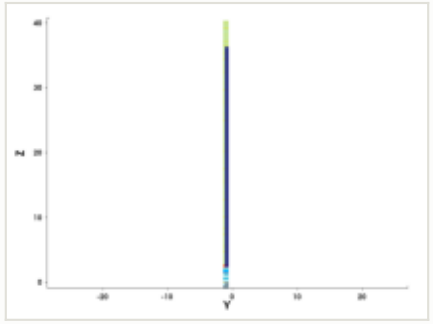

y cut at -1.035 µm

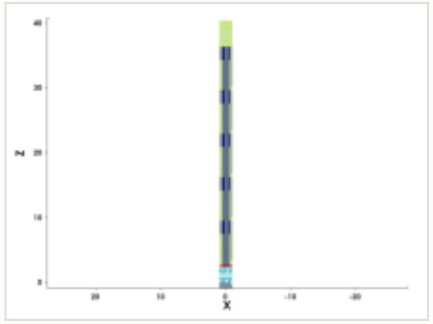

mask for this step

no mask for this step

steps by process area

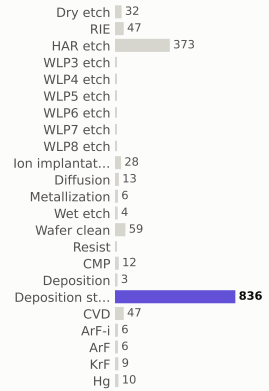

materials deposited (g)

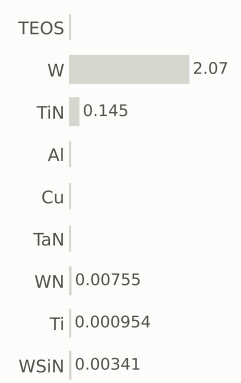

gases emitted (g)

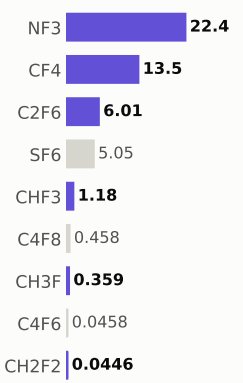

Step #19710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,097.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

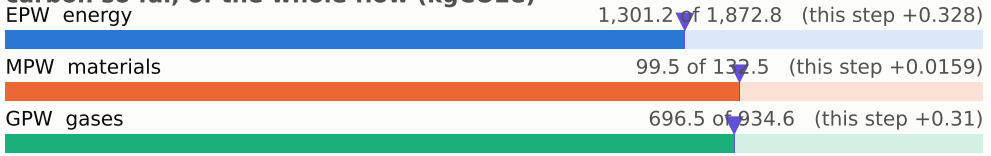

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

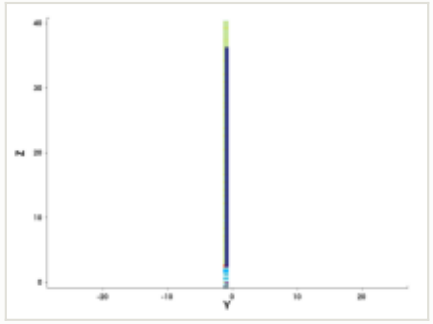

y cut at -1.035 µm

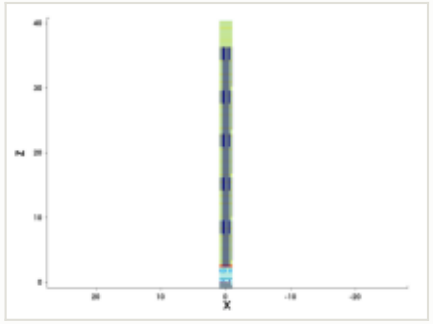

mask for this step

no mask for this step

steps by process area

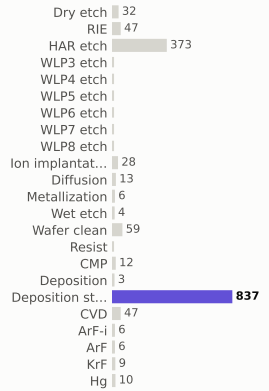

materials deposited (g)

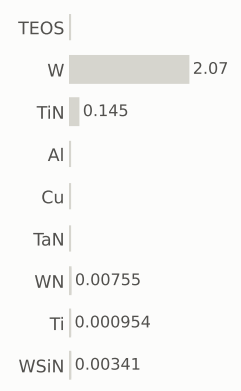

gases emitted (g)

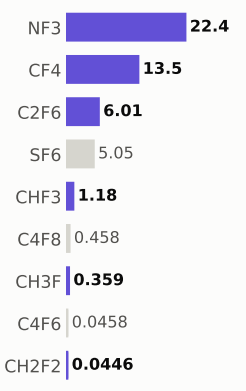

Step #19720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,097.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

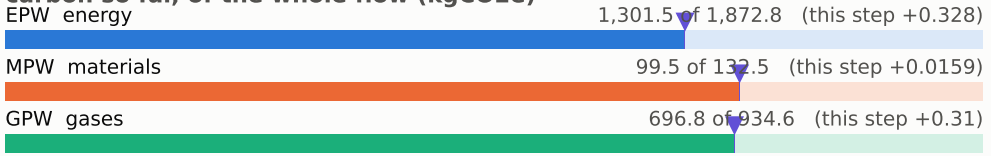

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

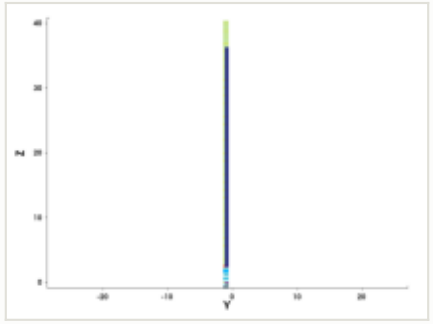

y cut at -1.035 µm

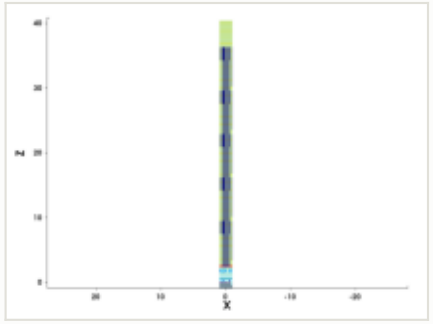

mask for this step

no mask for this step

steps by process area

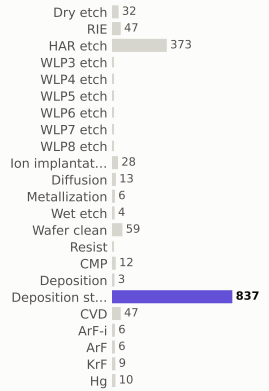

materials deposited (g)

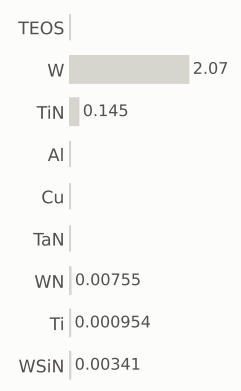

gases emitted (g)

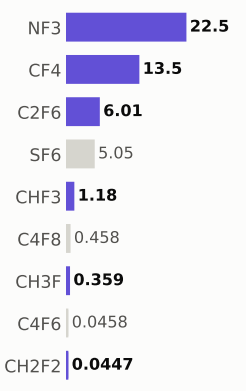

Step #19730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,098.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

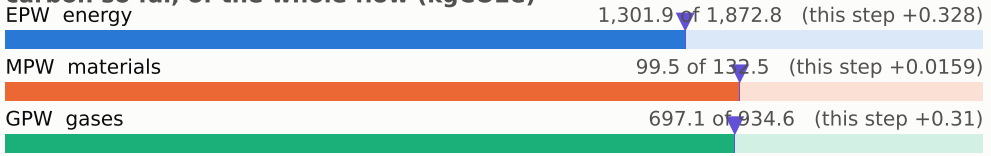

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

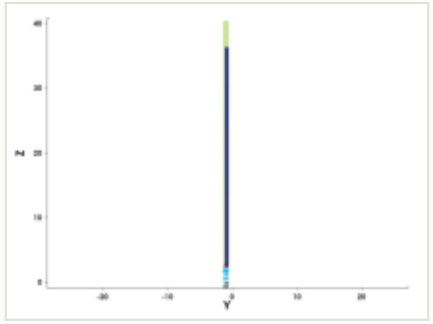

y cut at -1.035 µm

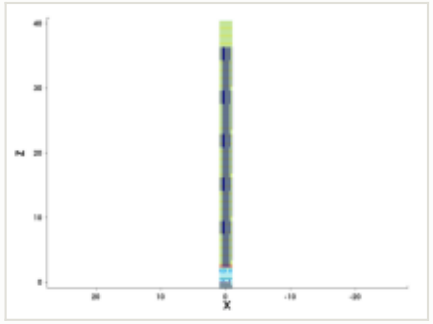

mask for this step

no mask for this step

steps by process area

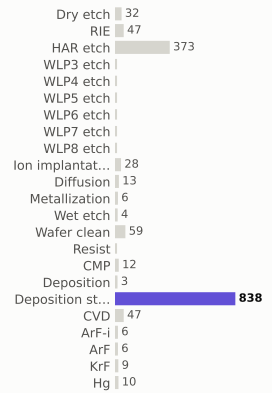

materials deposited (g)

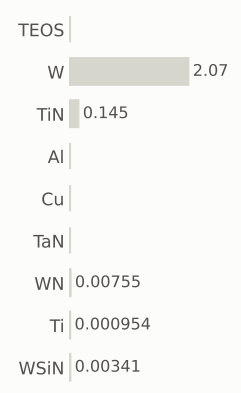

gases emitted (g)

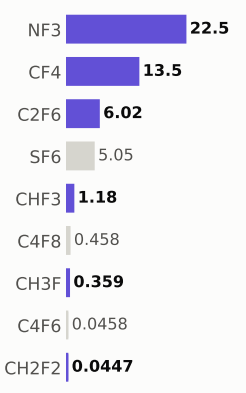

Step #19740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,099.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

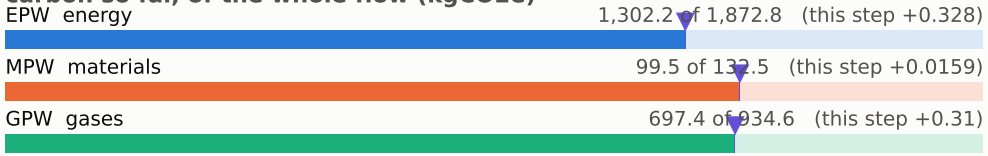

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

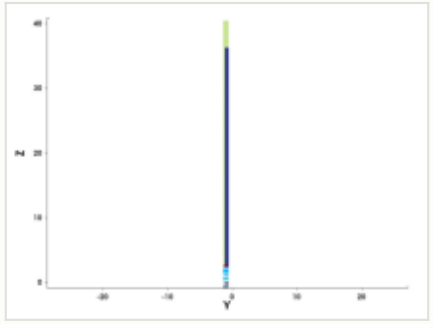

y cut at -1.035 µm

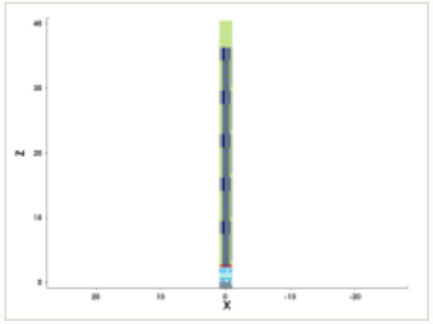

mask for this step

no mask for this step

steps by process area

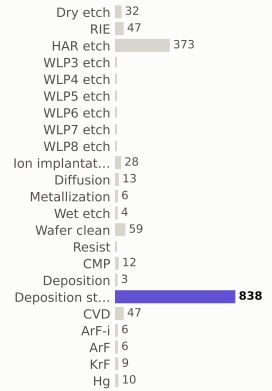

materials deposited (g)

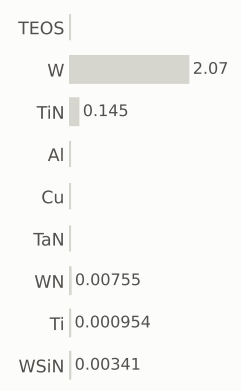

gases emitted (g)

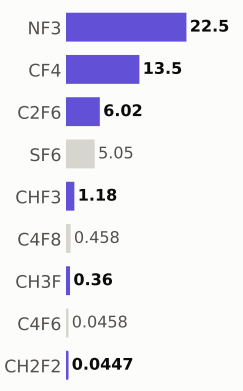

Step #19750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,099.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

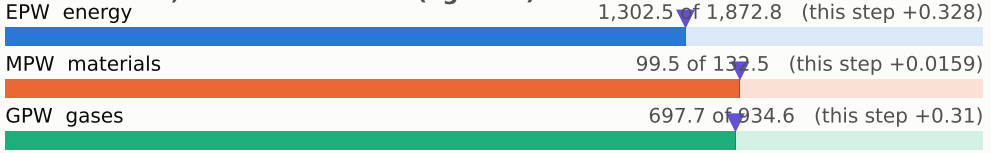

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

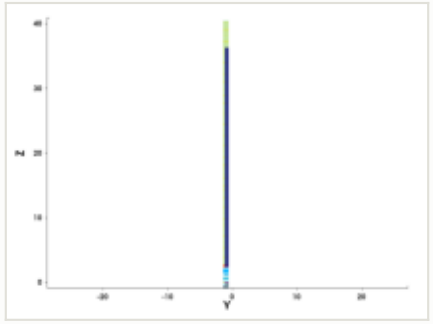

y cut at -1.035 µm

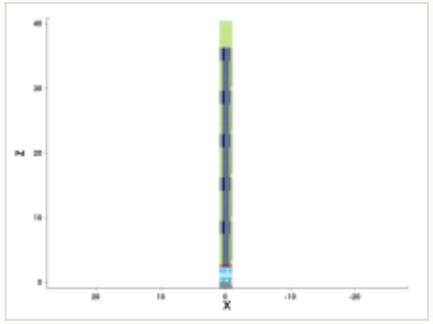

mask for this step

no mask for this step

steps by process area

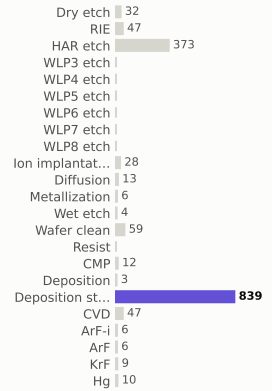

materials deposited (g)

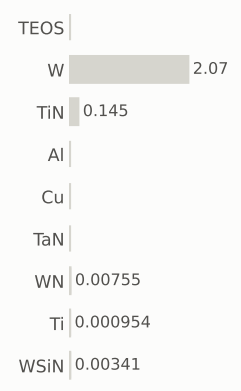

gases emitted (g)

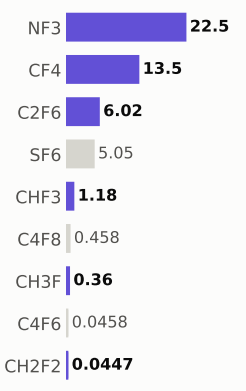

Step #19760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,100.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

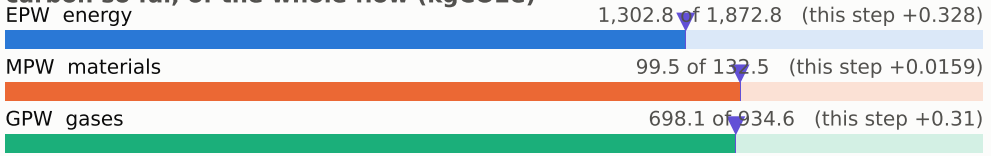

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

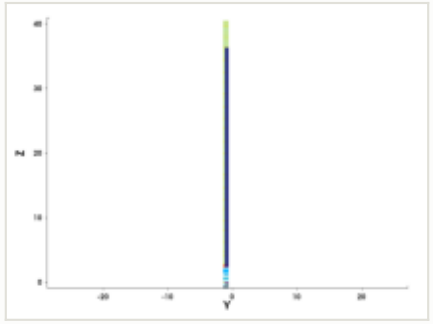

y cut at -1.035 µm

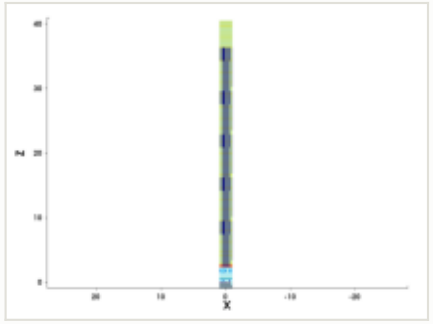

mask for this step

no mask for this step

steps by process area

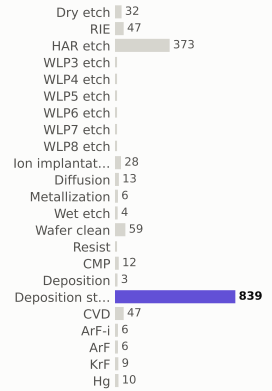

materials deposited (g)

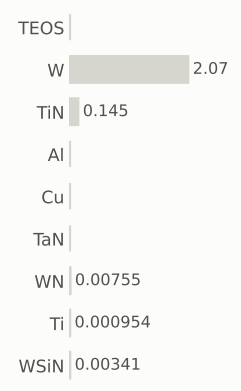

gases emitted (g)

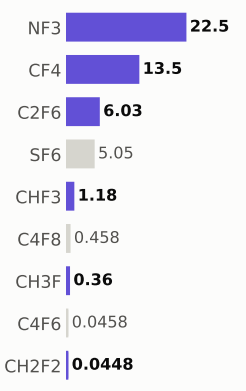

Step #19770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,101.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

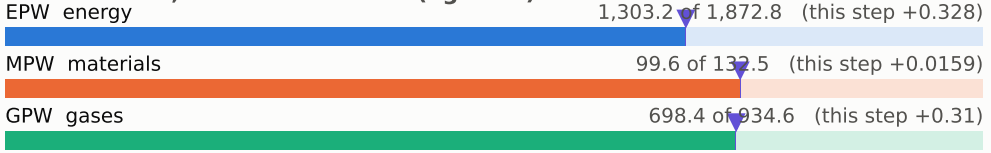

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

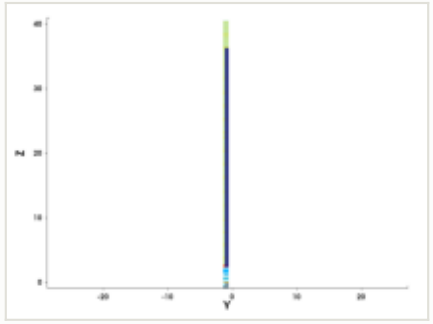

y cut at -1.035 µm

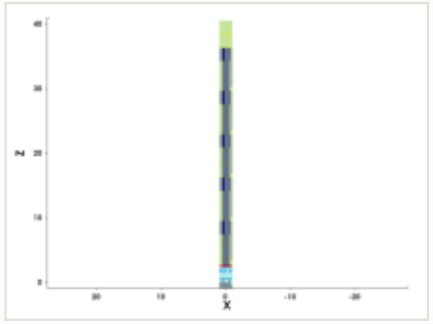

mask for this step

no mask for this step

steps by process area

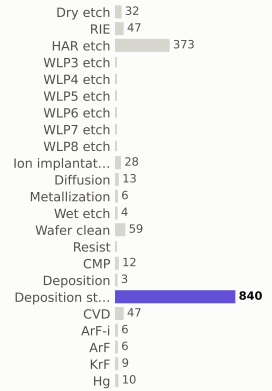

materials deposited (g)

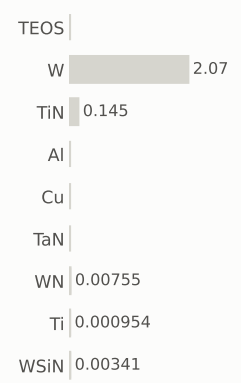

gases emitted (g)

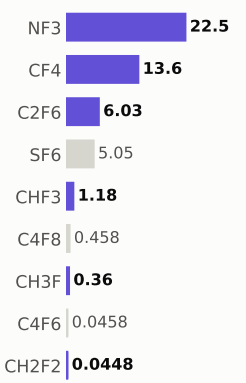

Step #19780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,101.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

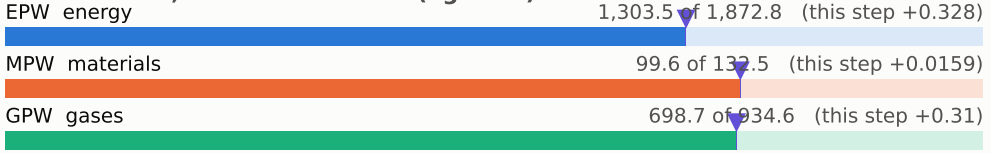

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

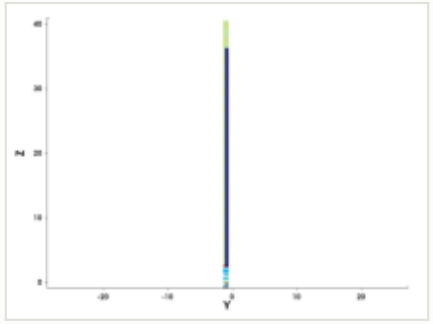

y cut at -1.035 µm

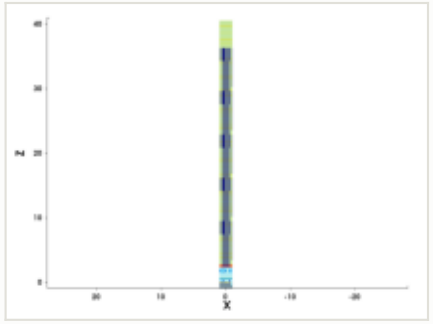

mask for this step

no mask for this step

steps by process area

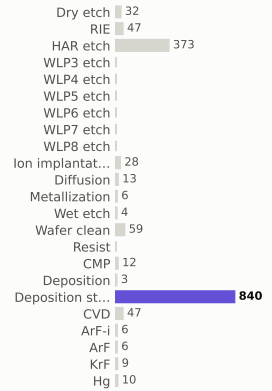

materials deposited (g)

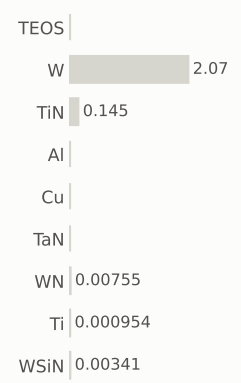

gases emitted (g)

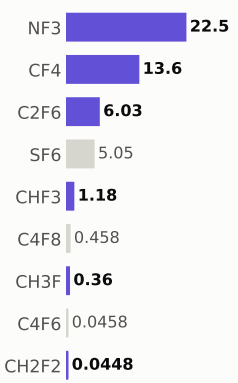

Step #19790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,102.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

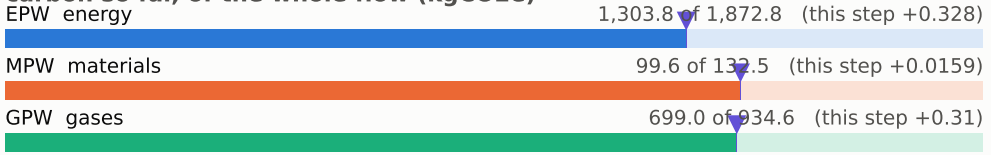

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

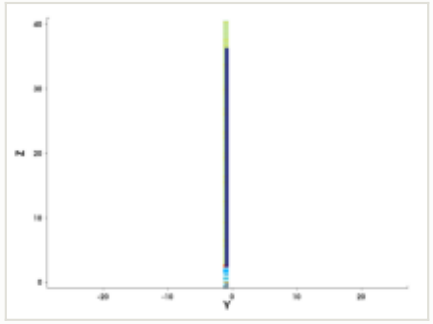

y cut at -1.035 µm

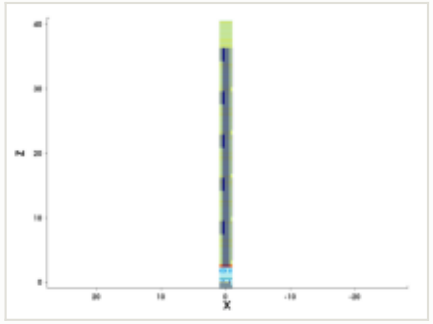

mask for this step

no mask for this step

steps by process area

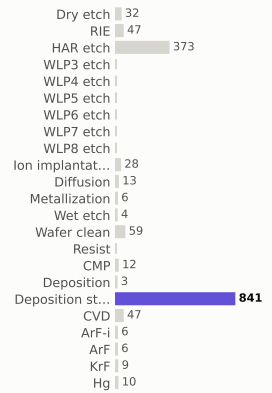

materials deposited (g)

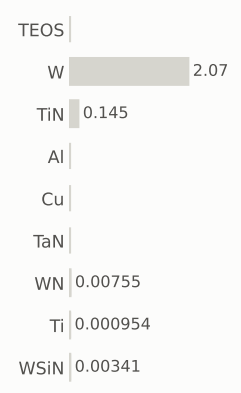

gases emitted (g)

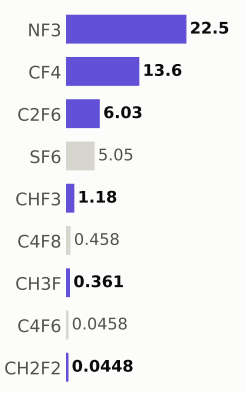

Step #19800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,103.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

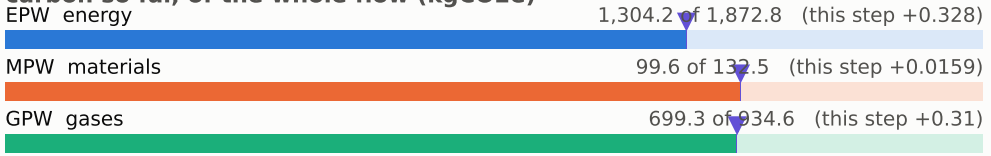

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

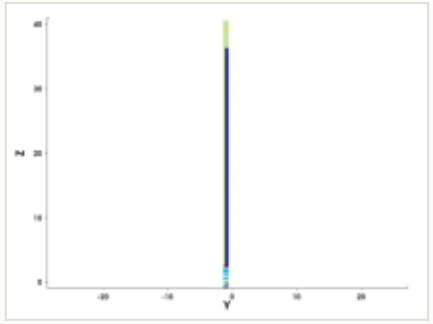

y cut at -1.035 µm

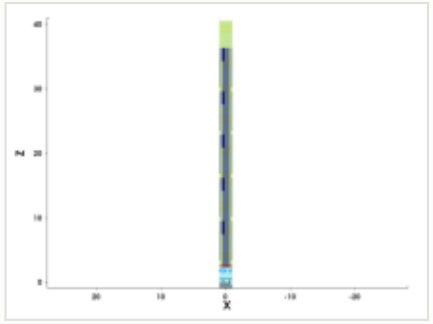

mask for this step

no mask for this step

steps by process area

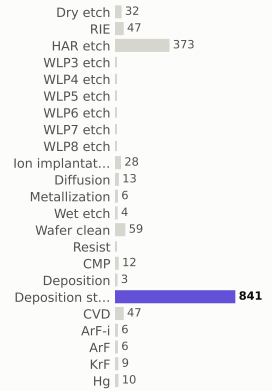

materials deposited (g)

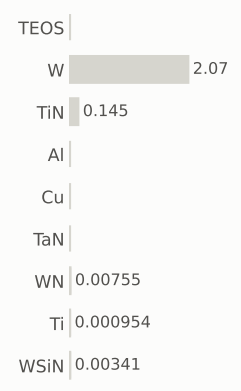

gases emitted (g)

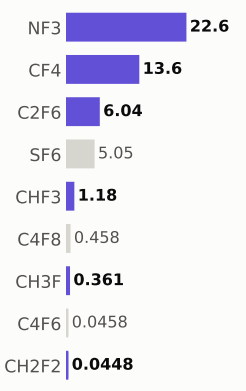

Step #19810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,103.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

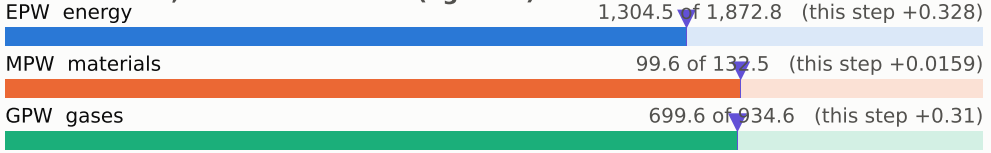

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

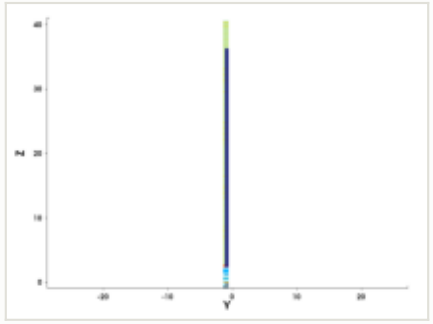

y cut at -1.035 µm

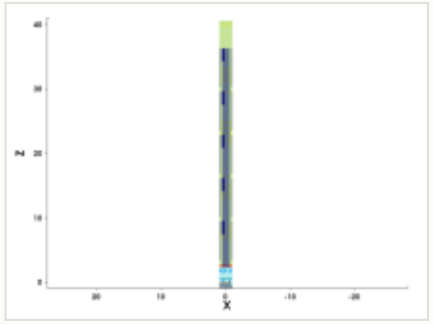

mask for this step

no mask for this step

steps by process area

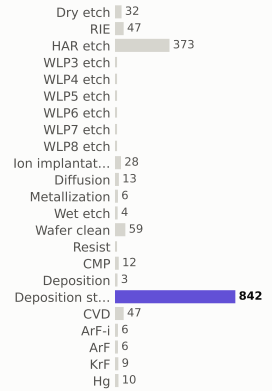

materials deposited (g)

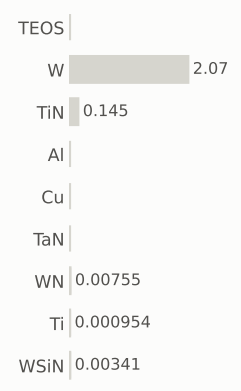

gases emitted (g)

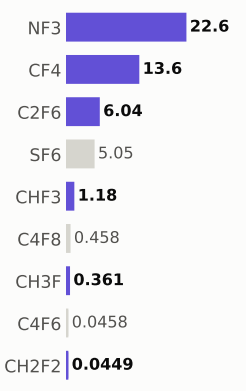

Step #19820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,104.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

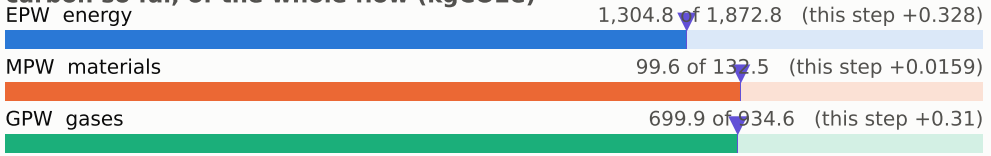

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

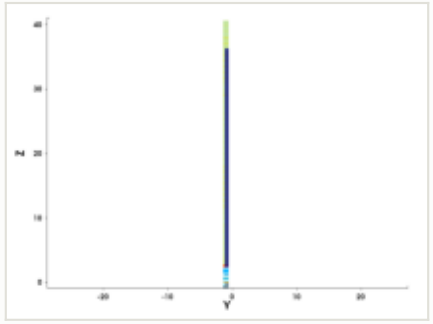

y cut at -1.035 µm

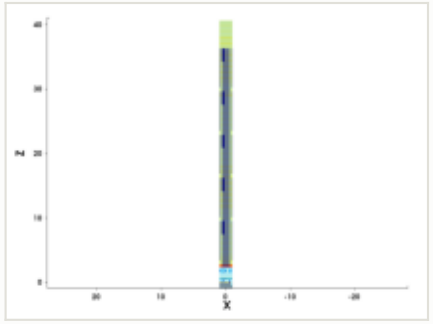

mask for this step

no mask for this step

steps by process area

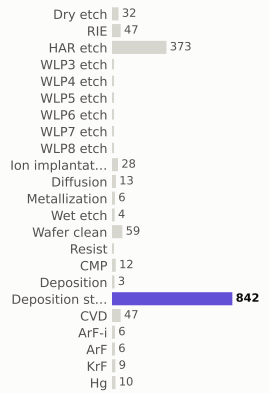

materials deposited (g)

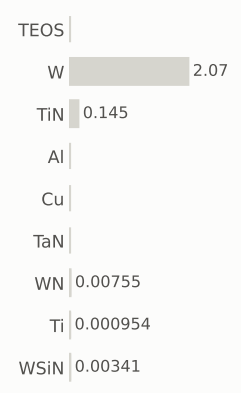

gases emitted (g)

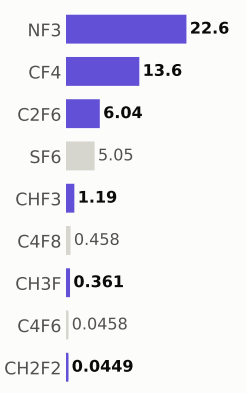

Step #19830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,105.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

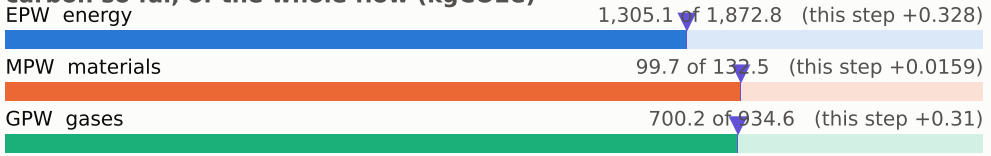

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

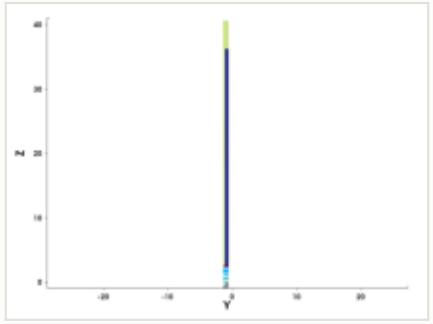

y cut at -1.035 µm

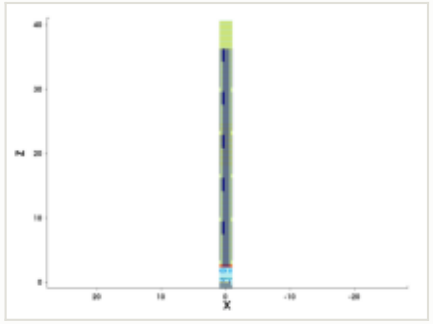

mask for this step

no mask for this step

steps by process area

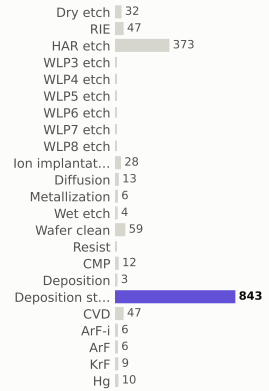

materials deposited (g)

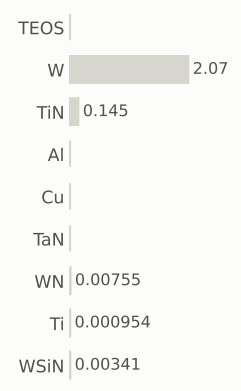

gases emitted (g)

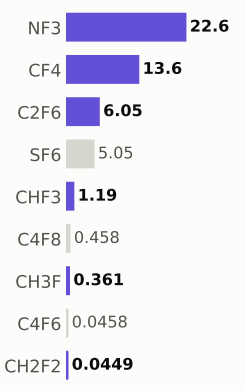

Step #19840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,105.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

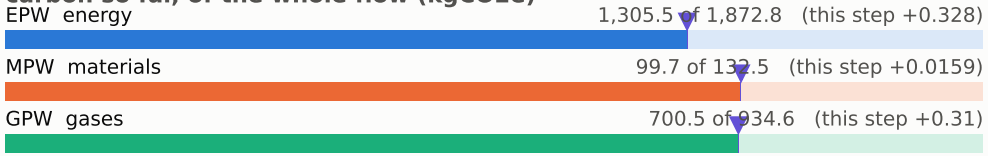

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

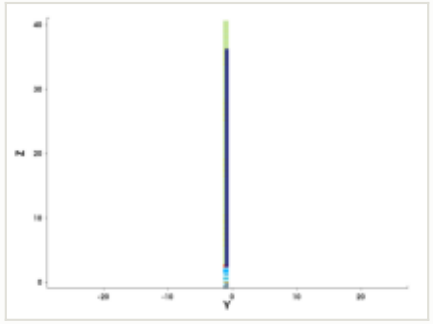

y cut at -1.035 µm

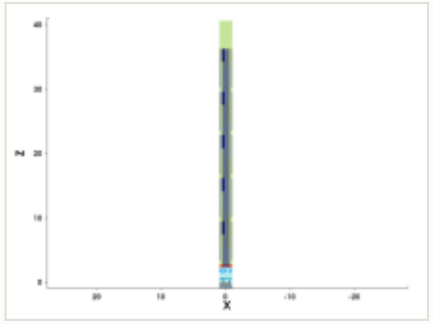

mask for this step

no mask for this step

steps by process area

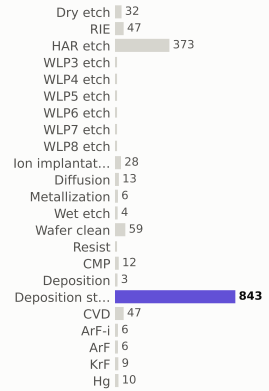

materials deposited (g)

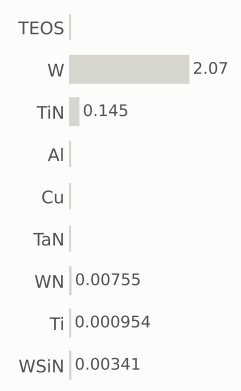

gases emitted (g)

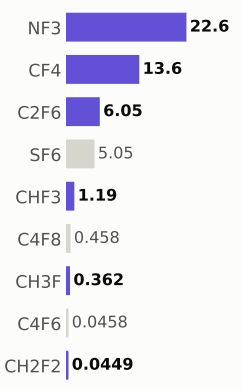

Step #19850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,106.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

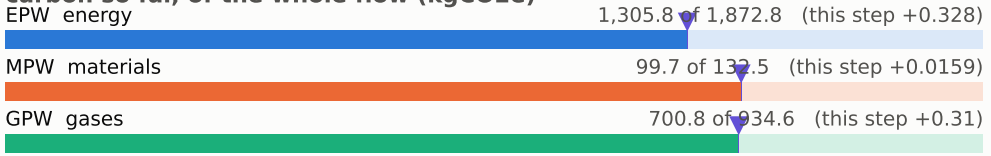

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

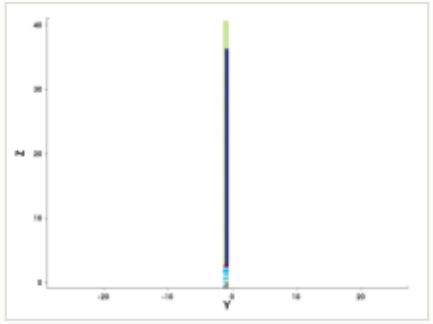

y cut at -1.035 µm

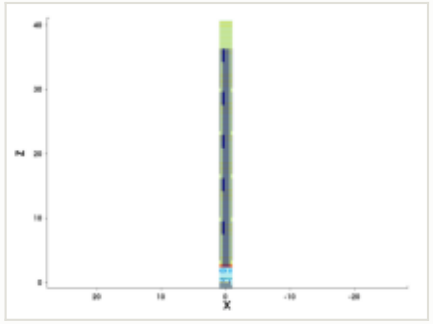

mask for this step

no mask for this step

steps by process area

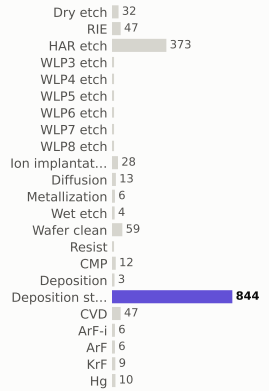

materials deposited (g)

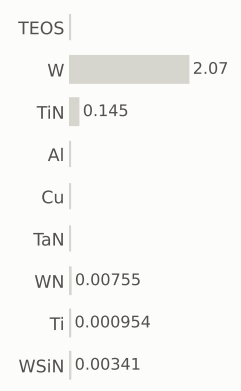

gases emitted (g)

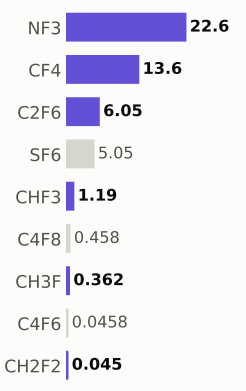

Step #19860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,107.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

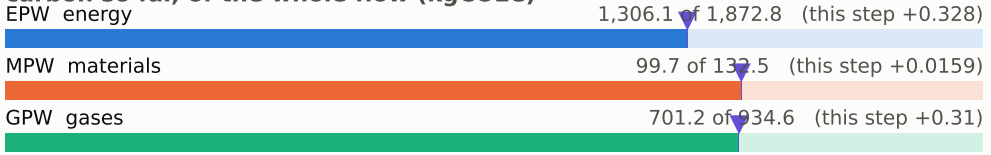

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

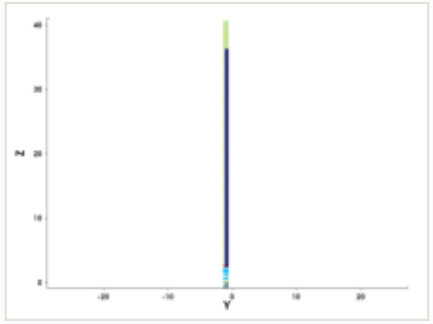

y cut at -1.035 µm

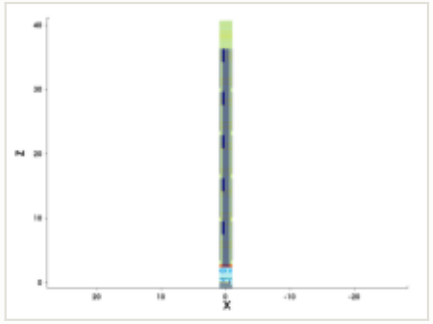

mask for this step

no mask for this step

steps by process area

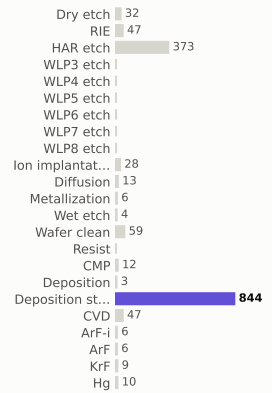

materials deposited (g)

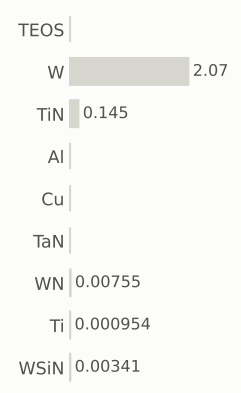

gases emitted (g)

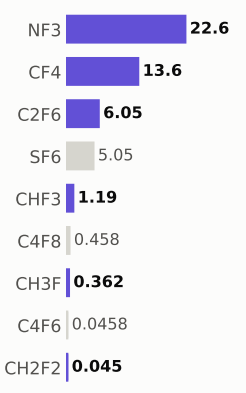

Step #19870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,107.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

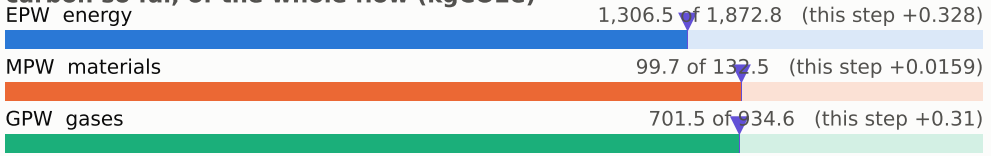

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

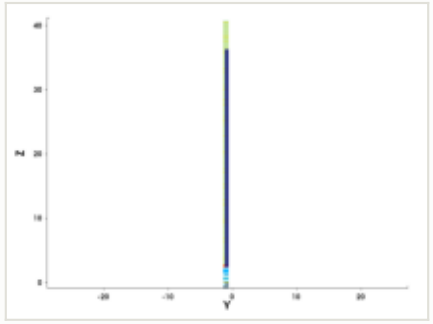

y cut at -1.035 µm

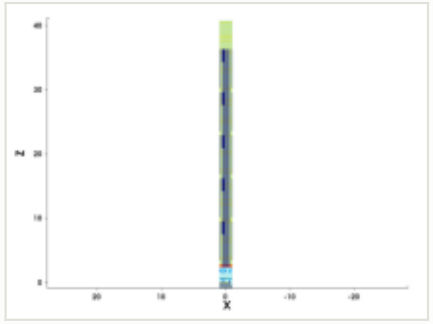

mask for this step

no mask for this step

steps by process area

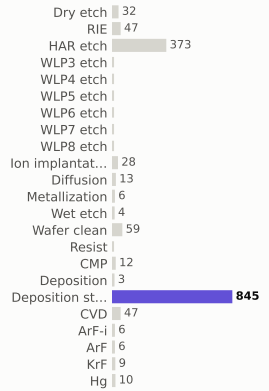

materials deposited (g)

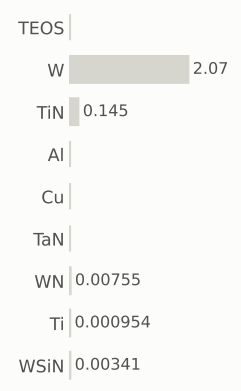

gases emitted (g)

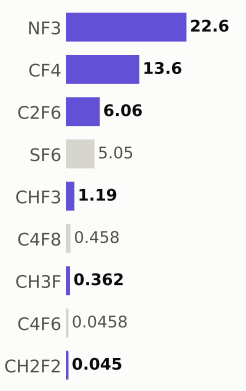

Step #19880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,108.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

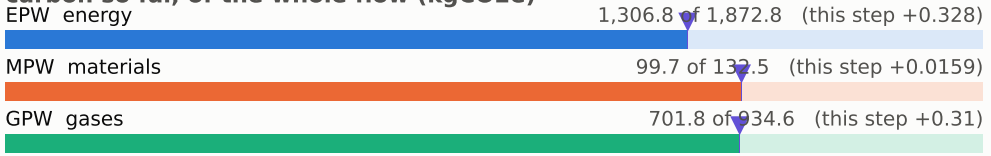

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

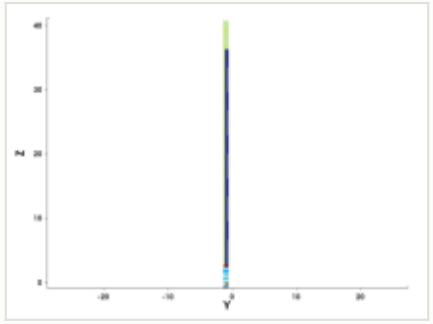

y cut at -1.035 µm

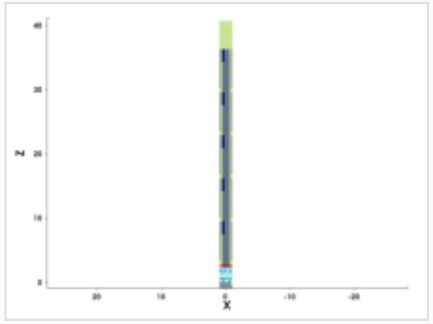

mask for this step

no mask for this step

steps by process area

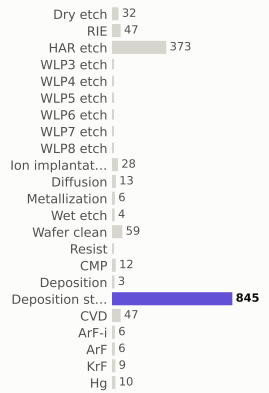

materials deposited (g)

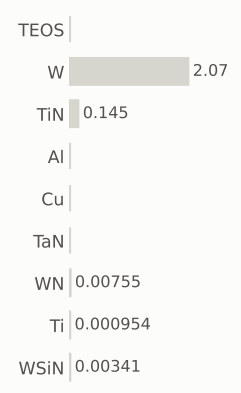

gases emitted (g)

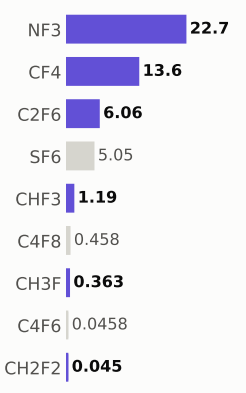

Step #19890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,109.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

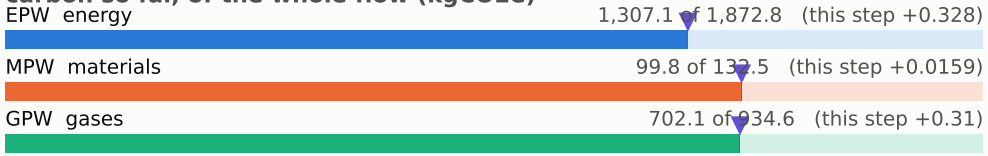

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

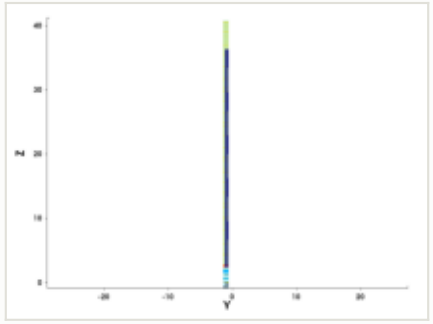

y cut at -1.035 µm

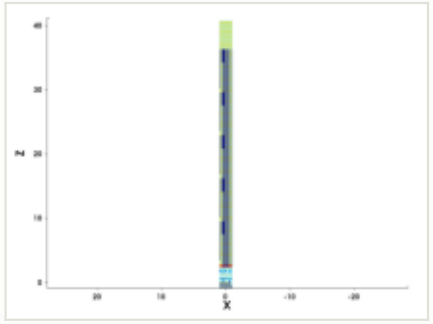

mask for this step

no mask for this step

steps by process area

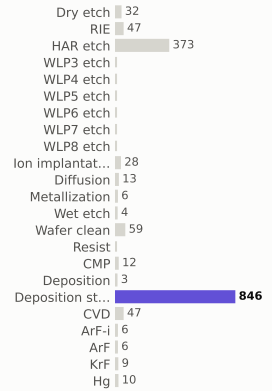

materials deposited (g)

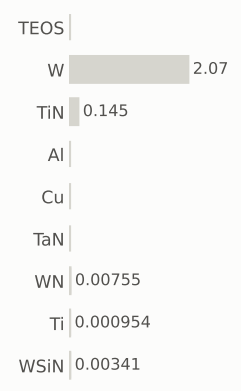

gases emitted (g)

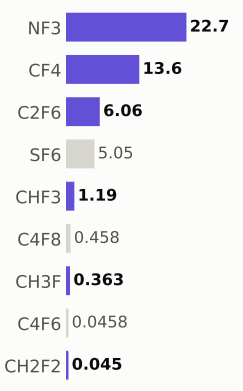

Step #19900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,109.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

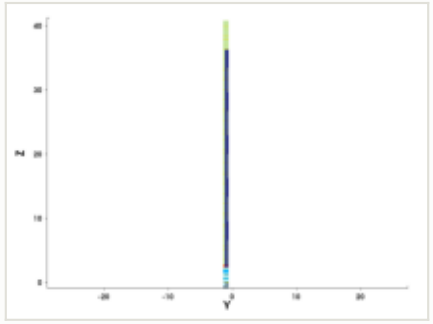

y cut at -1.035 µm

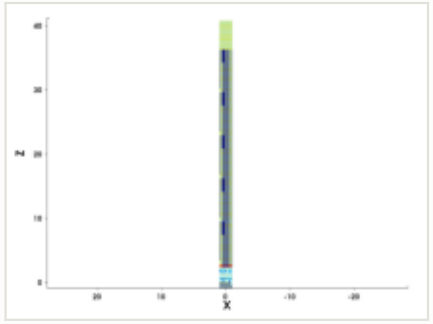

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

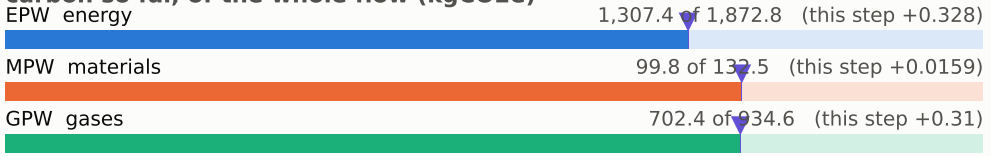

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

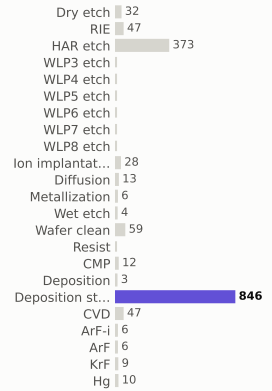

materials deposited (g)

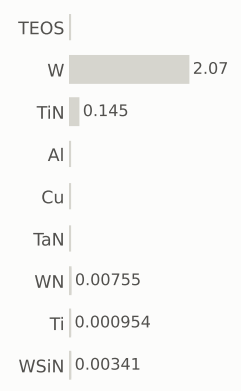

gases emitted (g)

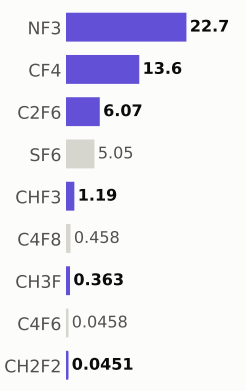

Step #19910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,110.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

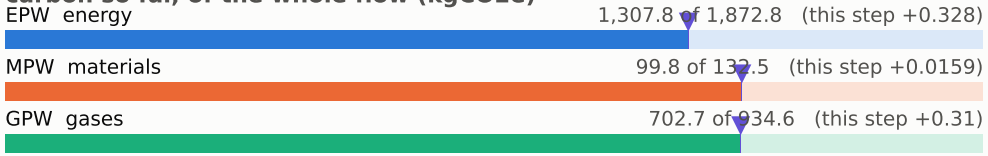

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

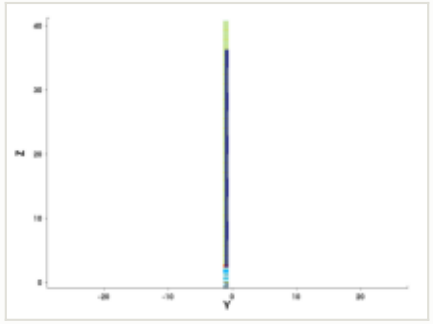

y cut at -1.035 µm

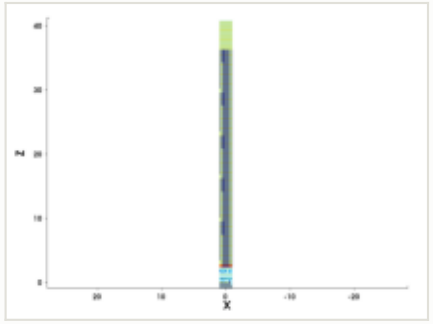

mask for this step

no mask for this step

steps by process area

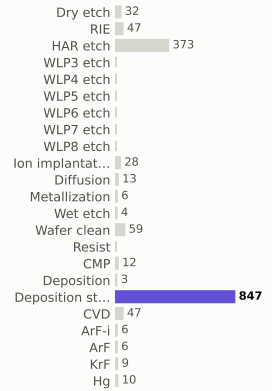

materials deposited (g)

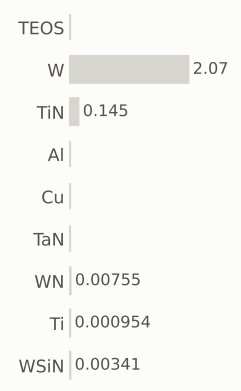

gases emitted (g)

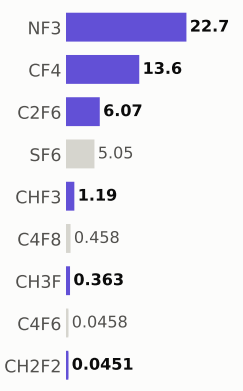

Step #19920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,110.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

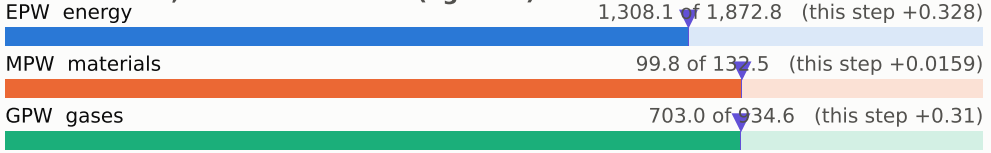

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

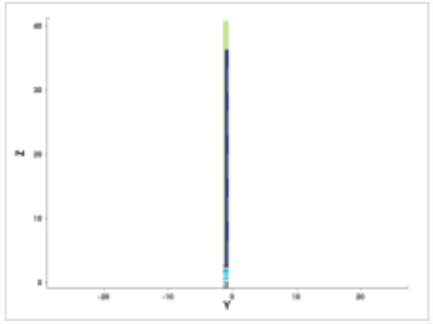

y cut at -1.035 µm

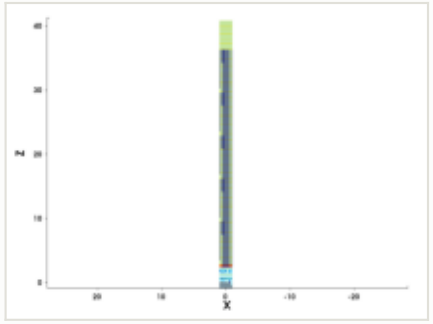

mask for this step

no mask for this step

steps by process area

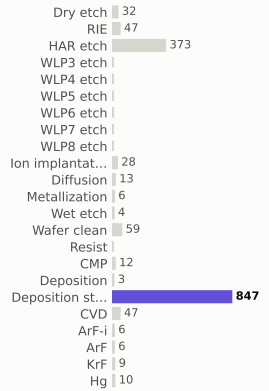

materials deposited (g)

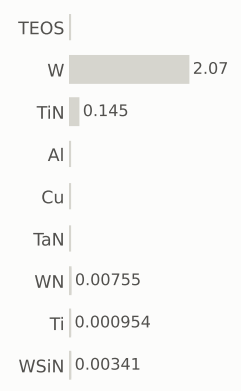

gases emitted (g)

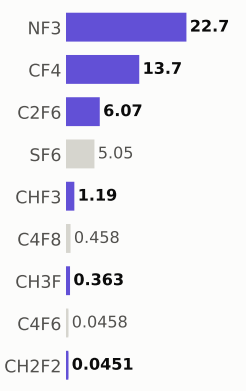

Step #19930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,111.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

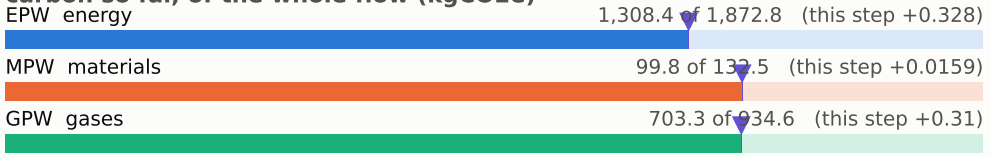

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

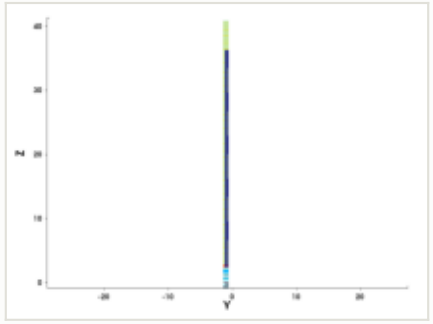

y cut at -1.035 µm

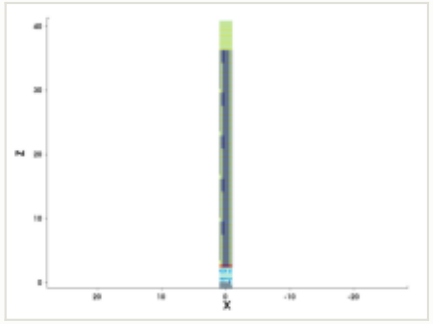

mask for this step

no mask for this step

steps by process area

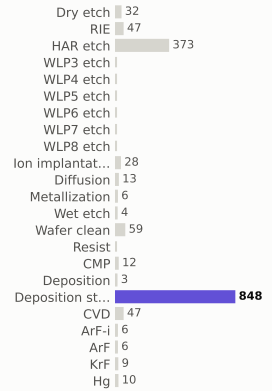

materials deposited (g)

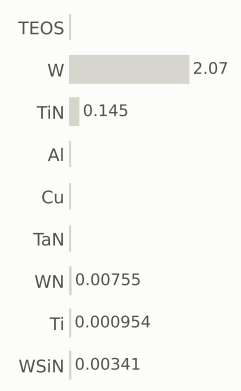

gases emitted (g)

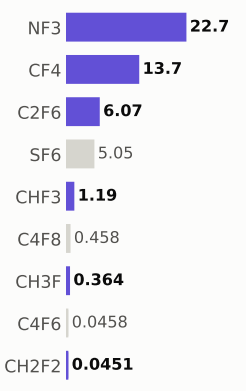

Step #19940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,112.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

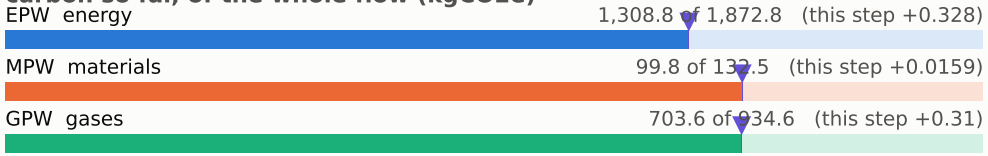

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

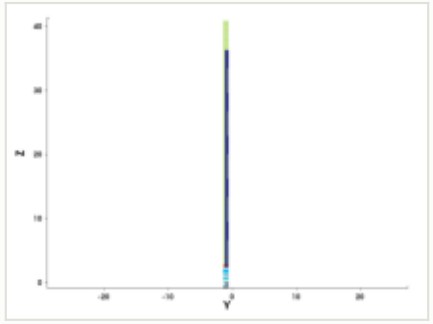

y cut at -1.035 µm

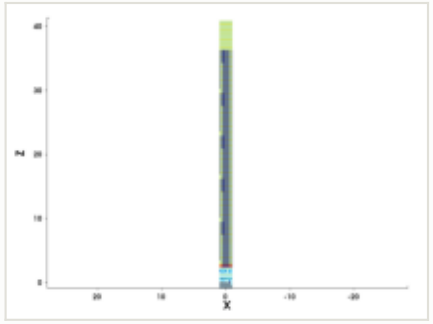

mask for this step

no mask for this step

steps by process area

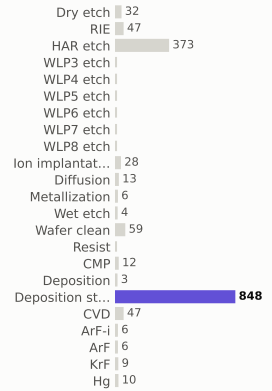

materials deposited (g)

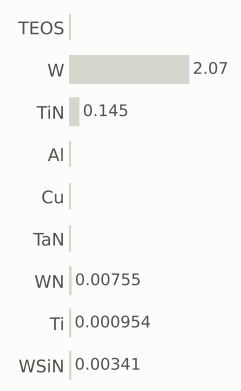

gases emitted (g)

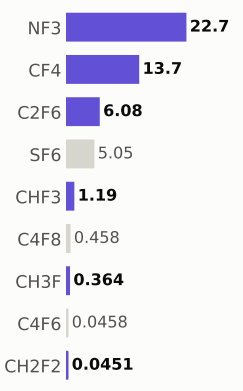

Step #19950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,112.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

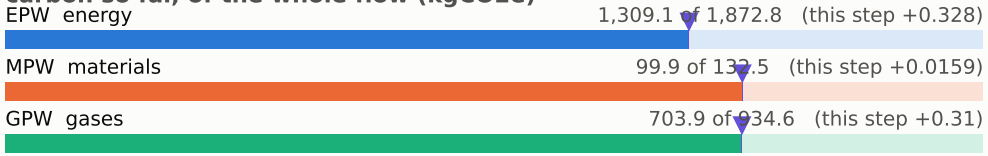

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

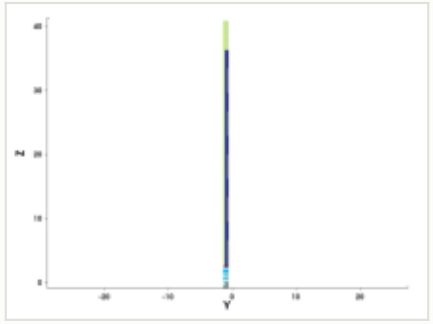

y cut at -1.035 µm

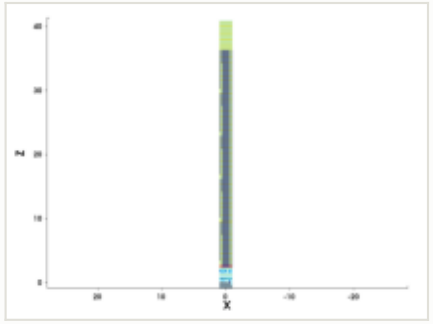

mask for this step

no mask for this step

steps by process area

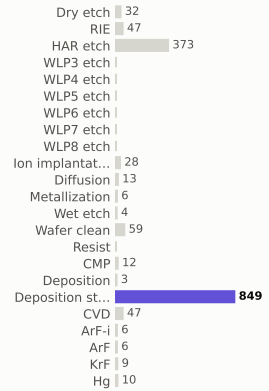

materials deposited (g)

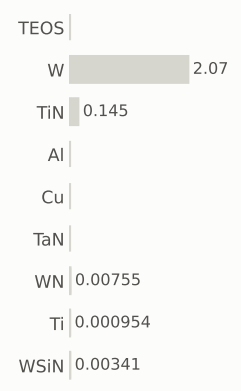

gases emitted (g)

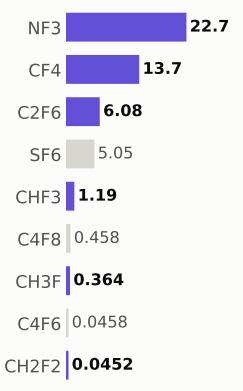

Step #19960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,113.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

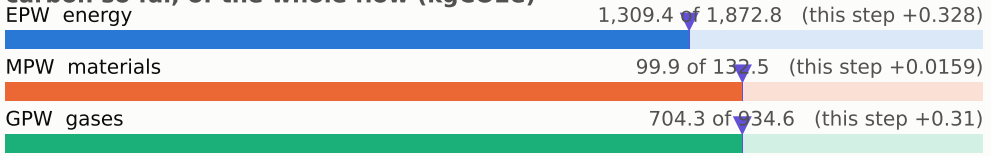

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

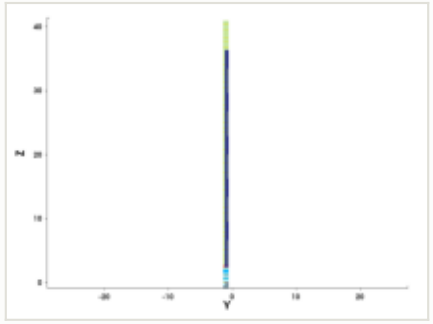

y cut at -1.035 µm

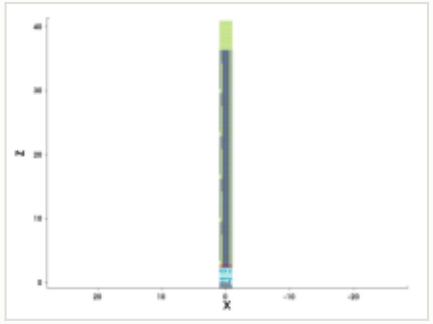

mask for this step

no mask for this step

steps by process area

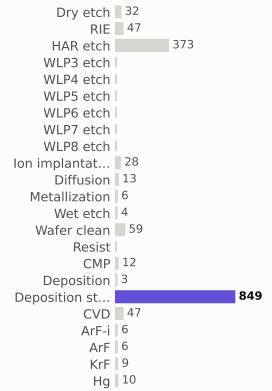

materials deposited (g)

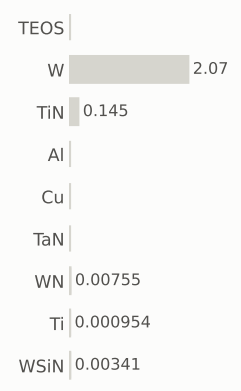

gases emitted (g)

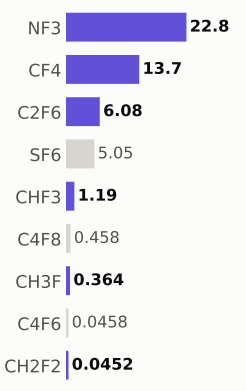

Step #19970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,114.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

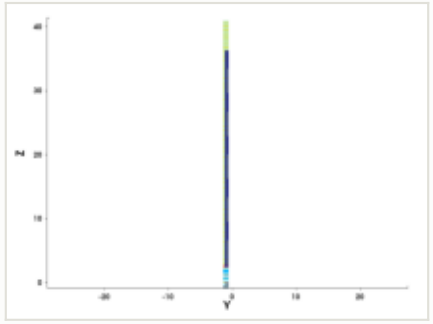

y cut at -1.035 µm

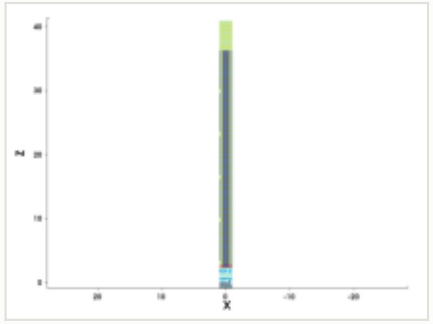

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

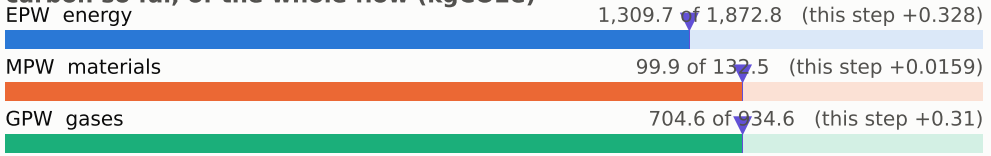

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

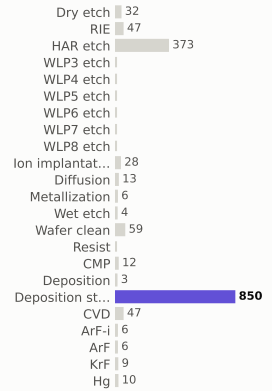

materials deposited (g)

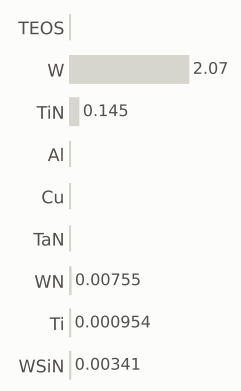

gases emitted (g)

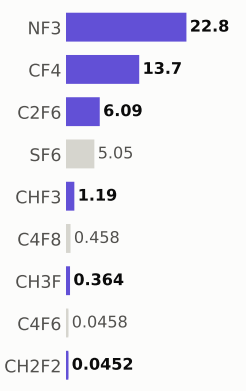

Step #19980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,114.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

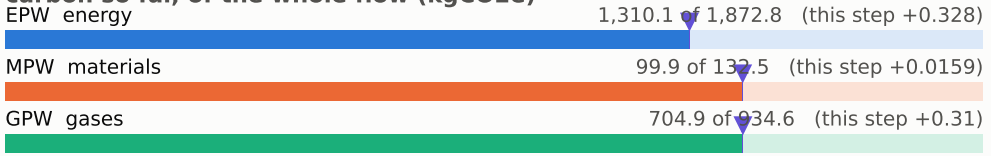

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

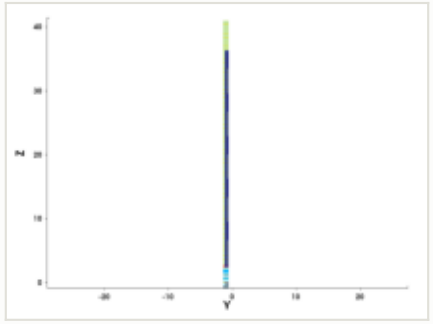

y cut at -1.035 µm

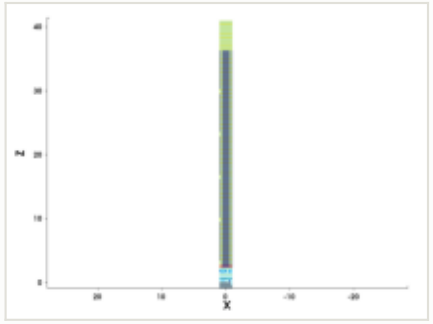

mask for this step

no mask for this step

steps by process area

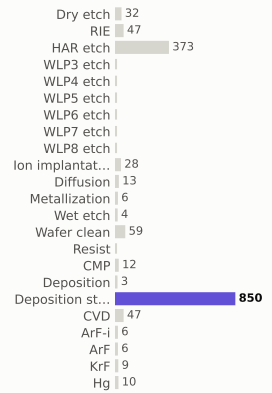

materials deposited (g)

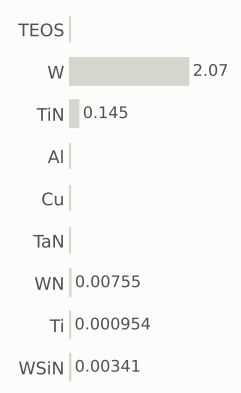

gases emitted (g)

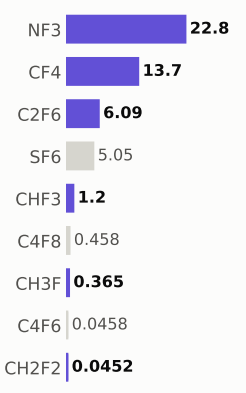

Step #19990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,115.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

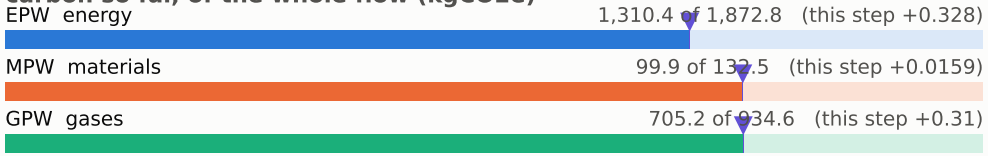

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

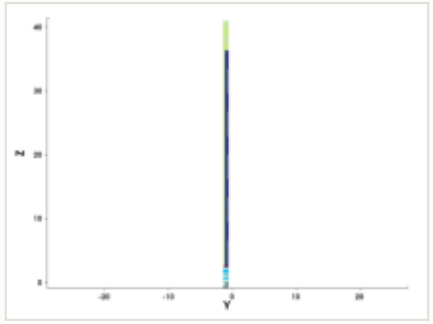

y cut at -1.035 µm

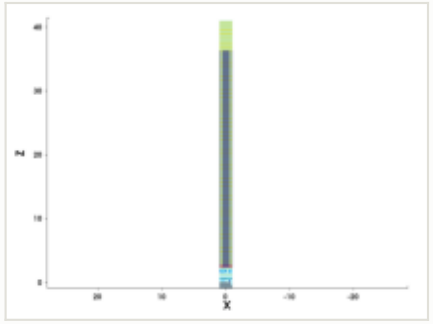

mask for this step

no mask for this step

steps by process area

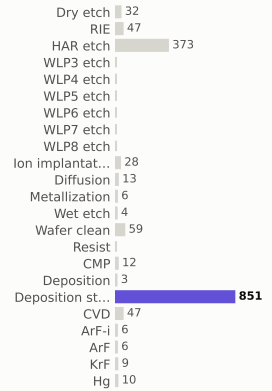

materials deposited (g)

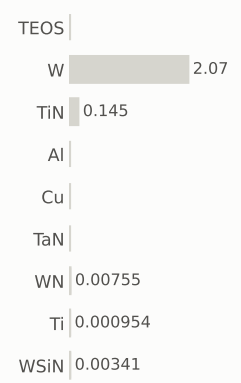

gases emitted (g)

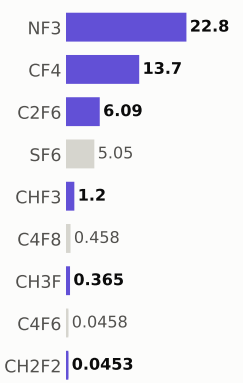

Step #20000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,116.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

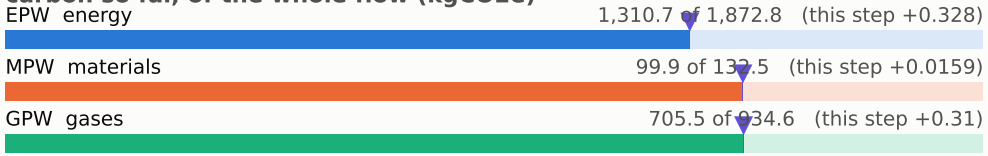

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

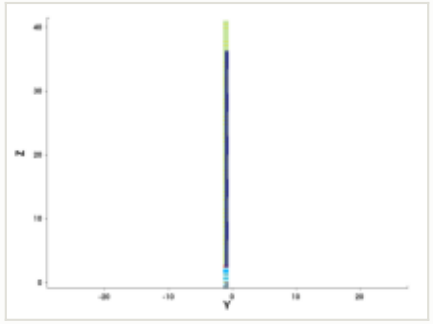

y cut at -1.035 µm

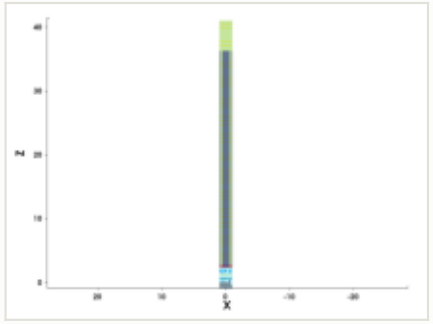

mask for this step

no mask for this step

steps by process area

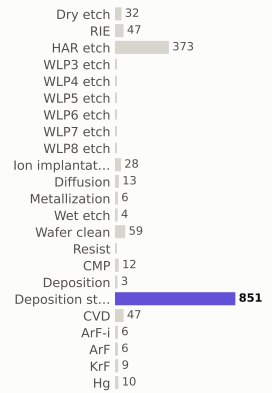

materials deposited (g)

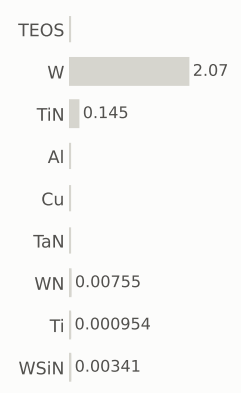

gases emitted (g)

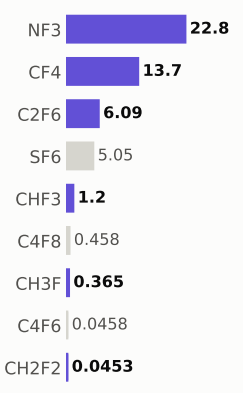

Step #20010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,116.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

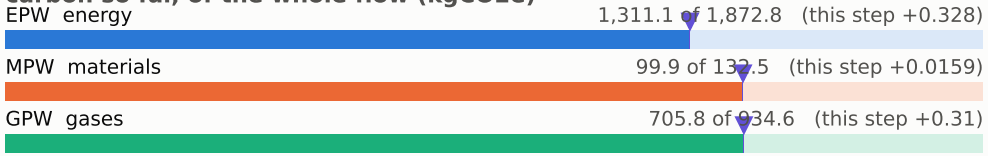

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

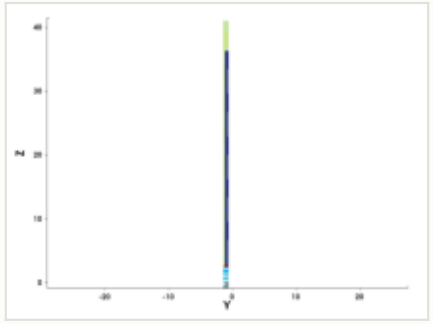

y cut at -1.035 µm

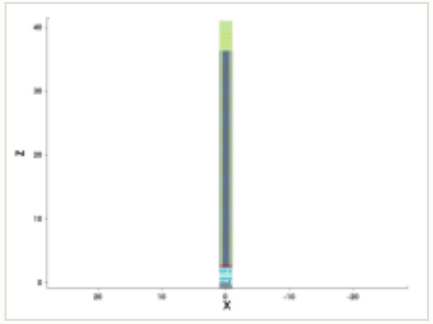

mask for this step

no mask for this step

steps by process area

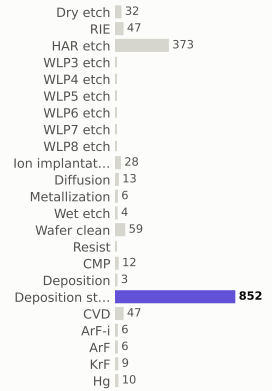

materials deposited (g)

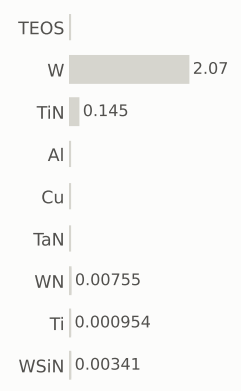

gases emitted (g)

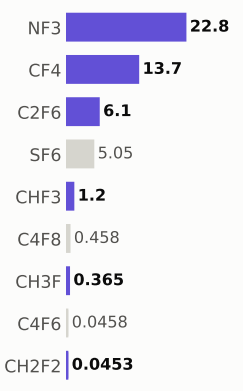

Step #20020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,117.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

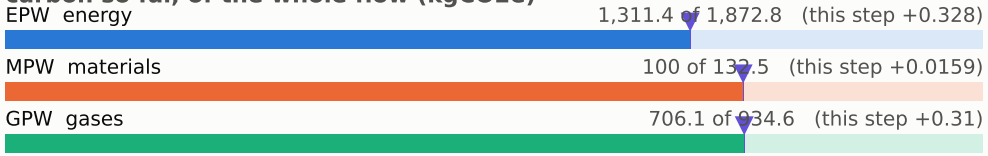

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

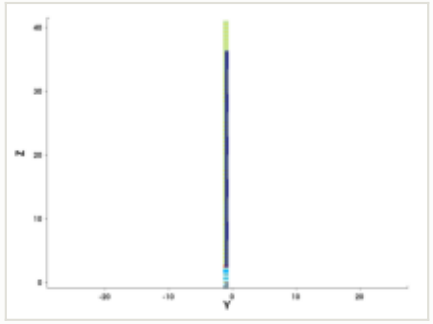

y cut at -1.035 µm

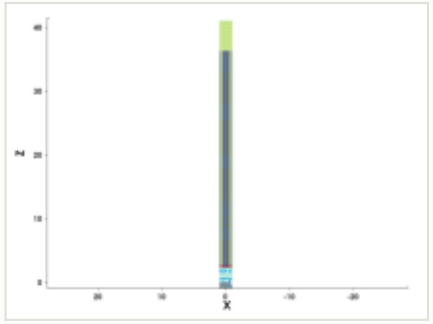

mask for this step

no mask for this step

steps by process area

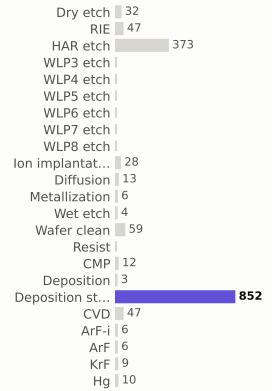

materials deposited (g)

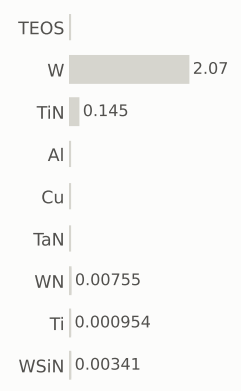

gases emitted (g)

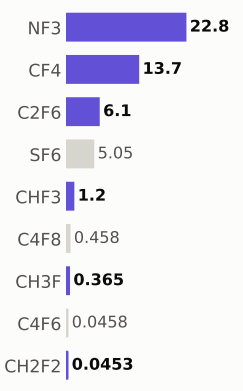

Step #20030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,118.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

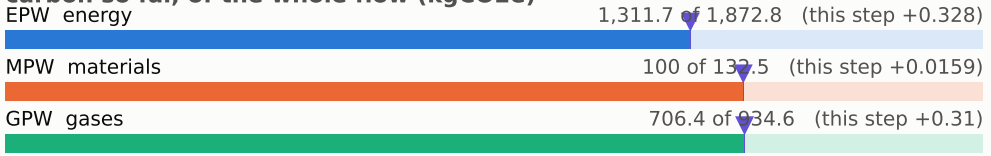

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

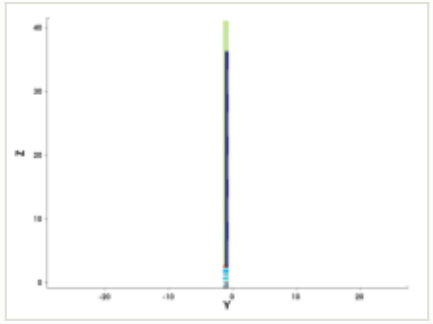

y cut at -1.035 µm

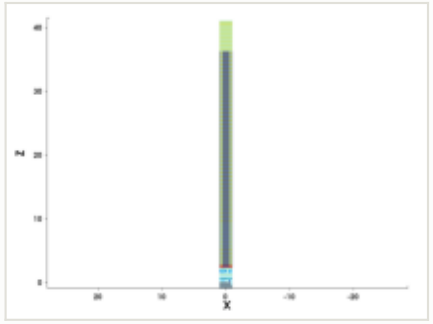

mask for this step

no mask for this step

steps by process area

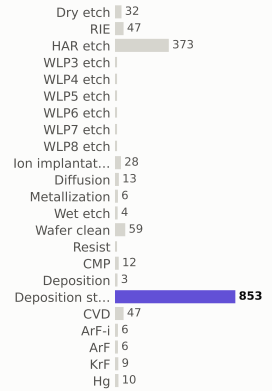

materials deposited (g)

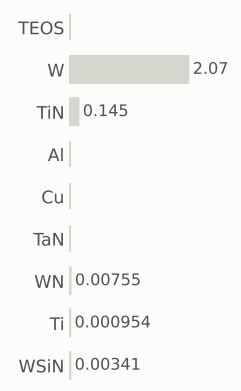

gases emitted (g)

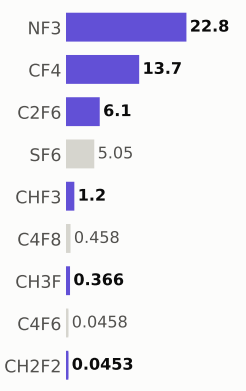

Step #20040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,118.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

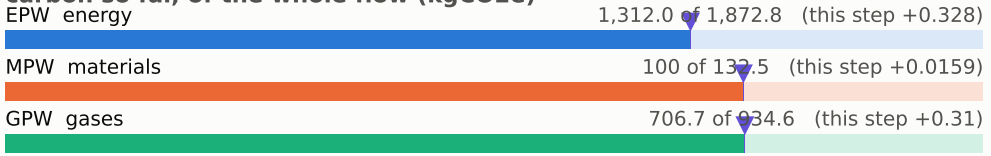

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

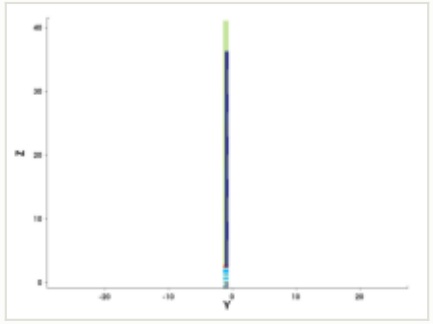

y cut at -1.035 µm

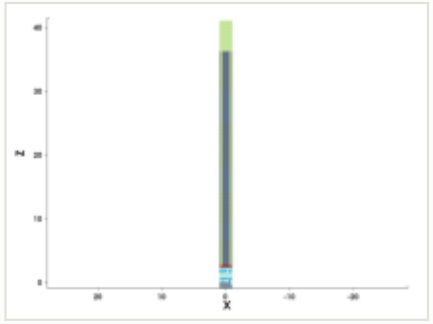

mask for this step

no mask for this step

steps by process area

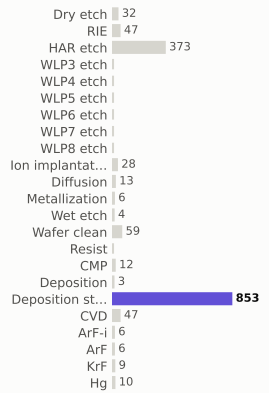

materials deposited (g)

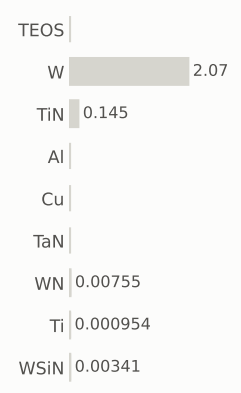

gases emitted (g)

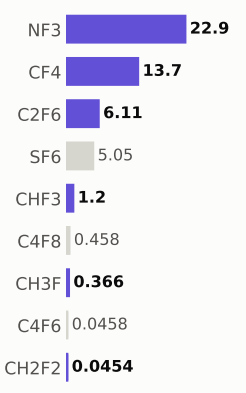

Step #20050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,119.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

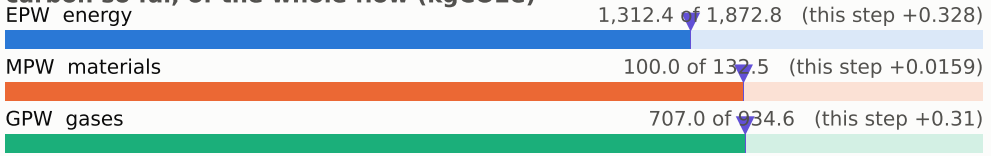

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

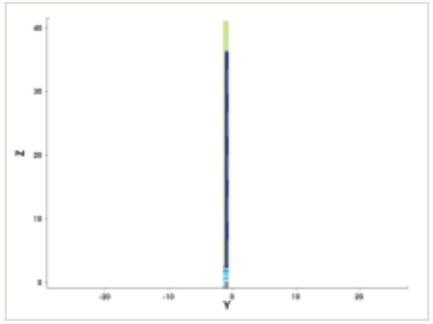

y cut at -1.035 µm

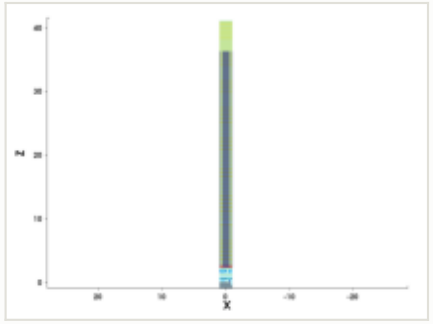

mask for this step

no mask for this step

steps by process area

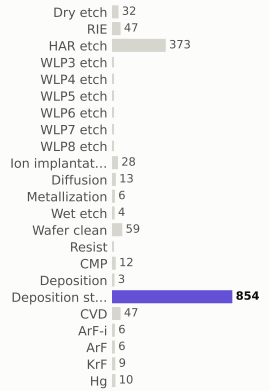

materials deposited (g)

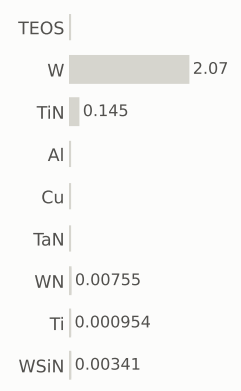

gases emitted (g)

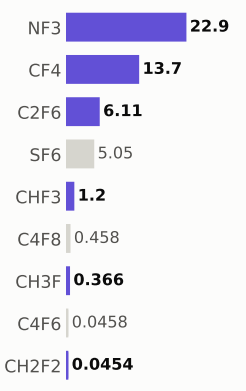

Step #20060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,120.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

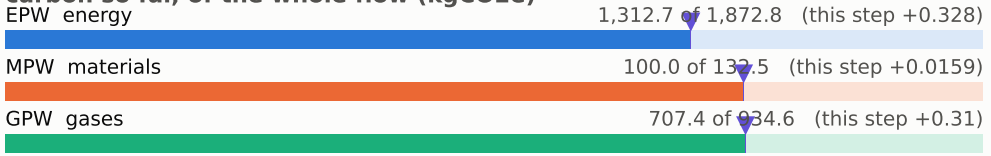

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

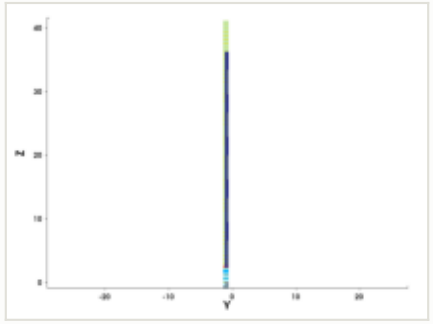

y cut at -1.035 µm

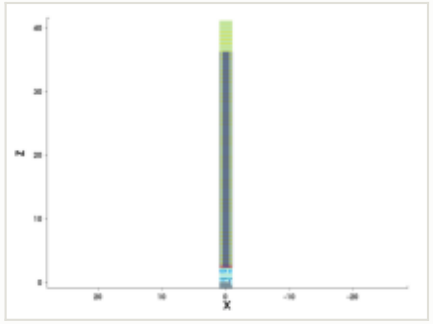

mask for this step

no mask for this step

steps by process area

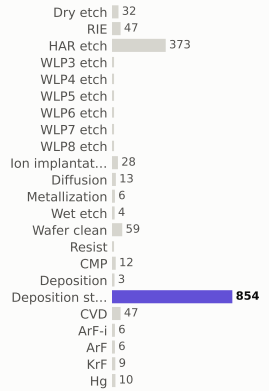

materials deposited (g)

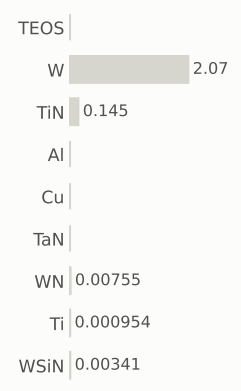

gases emitted (g)

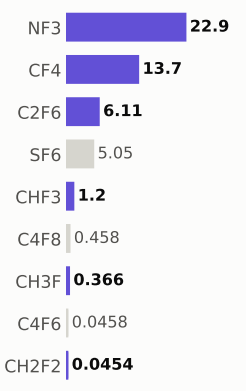

Step #20070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,120.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

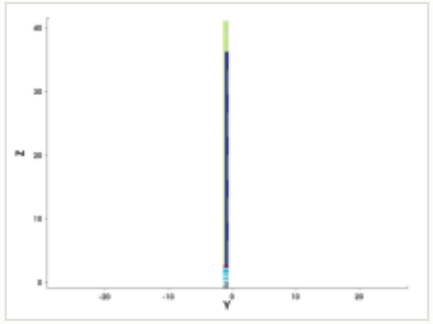

y cut at -1.035 µm

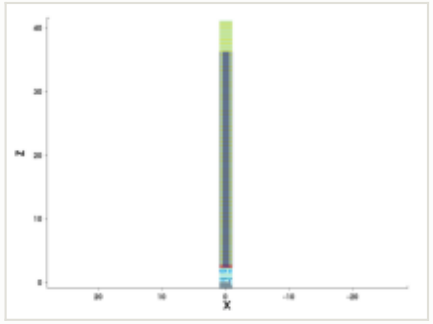

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

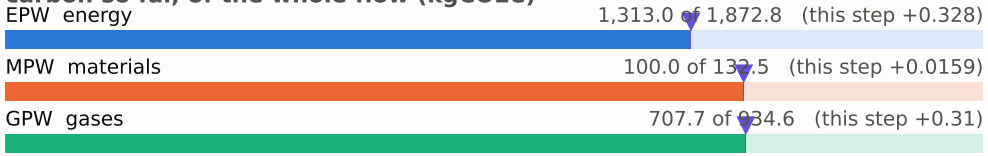

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

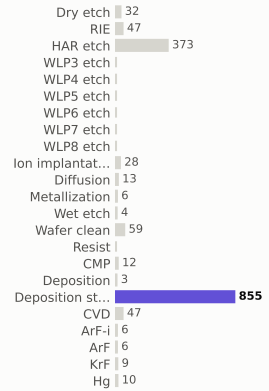

materials deposited (g)

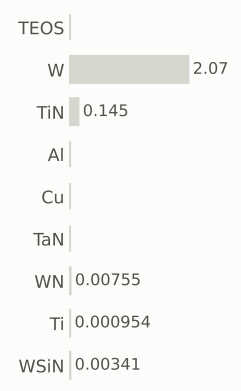

gases emitted (g)

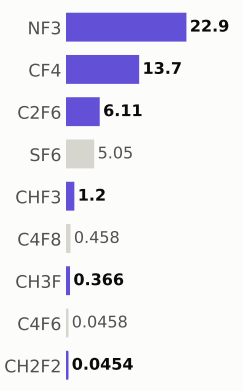

Step #20080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,121.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

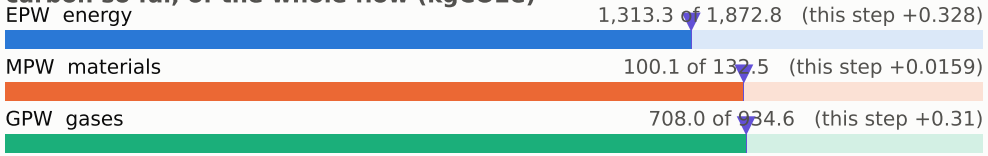

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

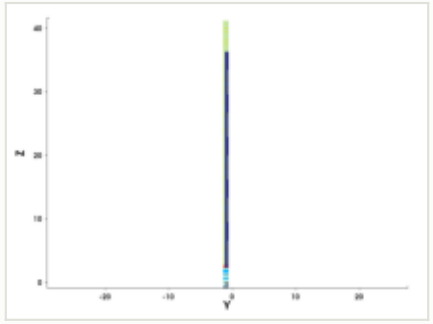

y cut at -1.035 µm

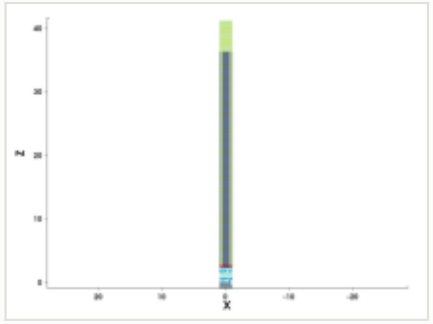

mask for this step

no mask for this step

steps by process area

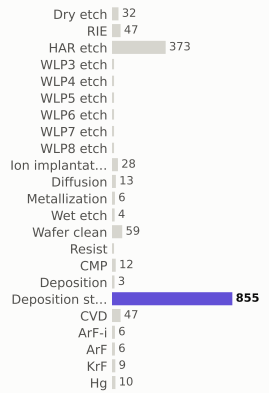

materials deposited (g)

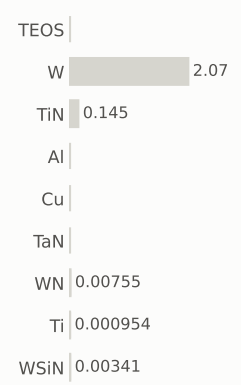

gases emitted (g)

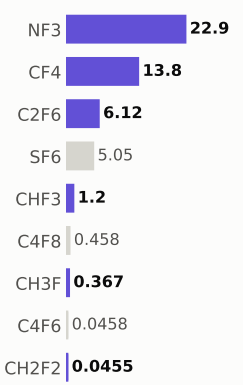

Step #20090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,122.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

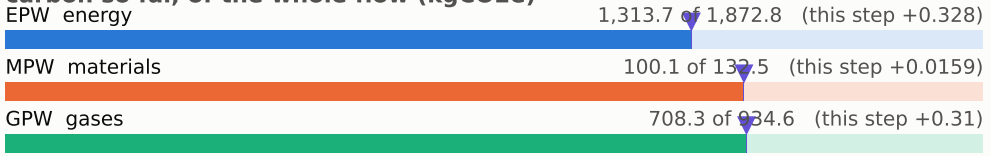

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

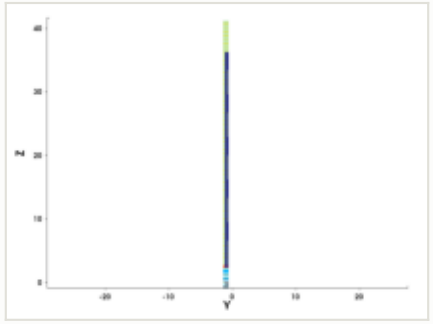

y cut at -1.035 µm

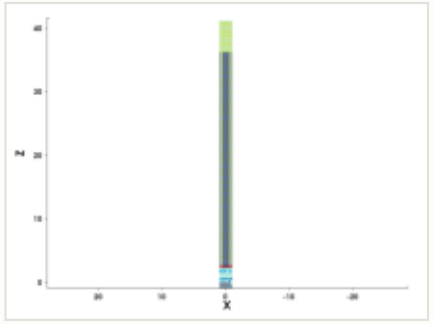

mask for this step

no mask for this step

steps by process area

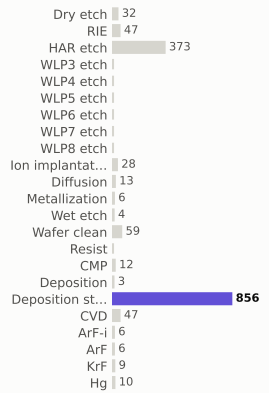

materials deposited (g)

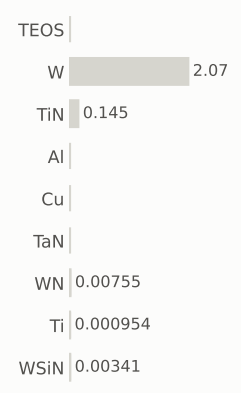

gases emitted (g)

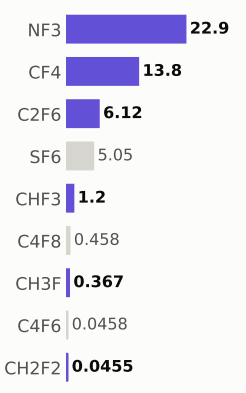

Step #20100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,122.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

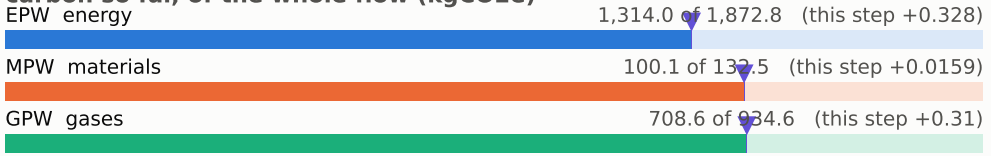

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

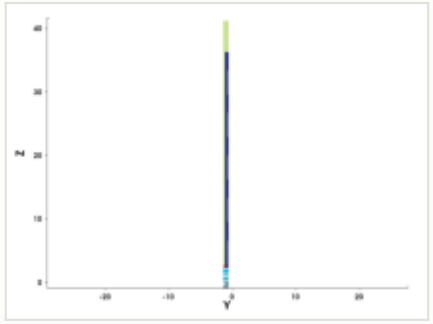

y cut at -1.035 µm

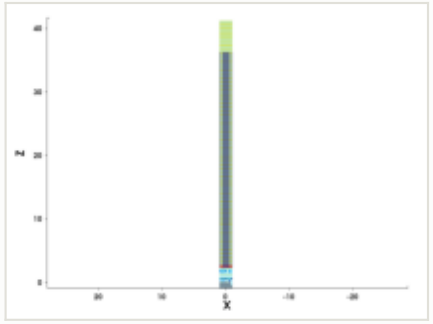

mask for this step

no mask for this step

steps by process area

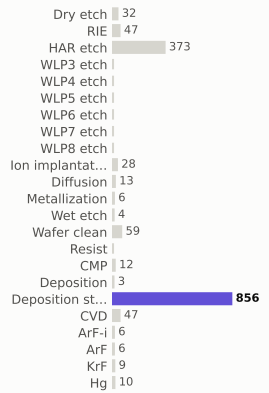

materials deposited (g)

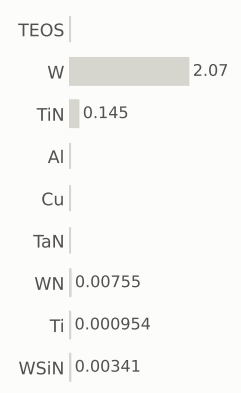

gases emitted (g)

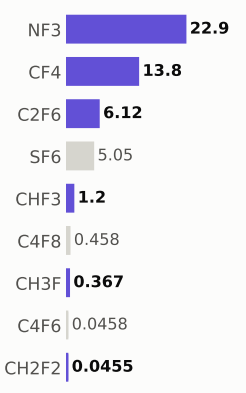

Step #20110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,123.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

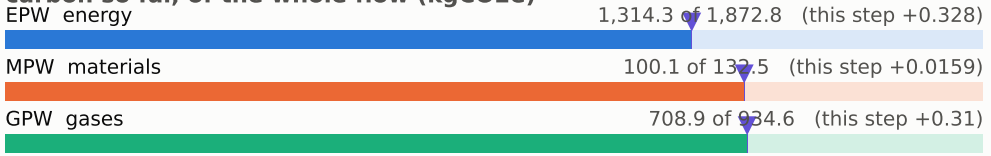

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

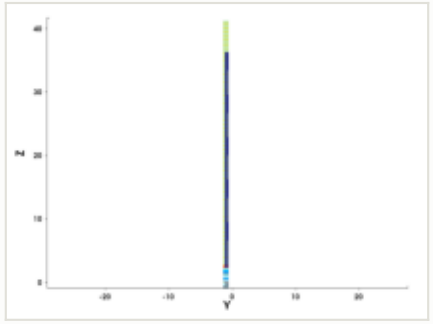

y cut at -1.035 µm

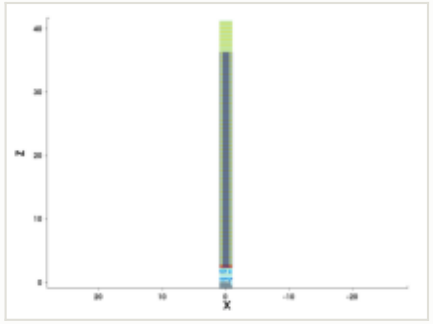

mask for this step

no mask for this step

steps by process area

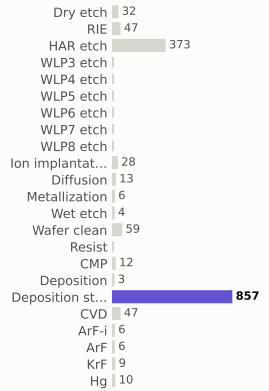

materials deposited (g)

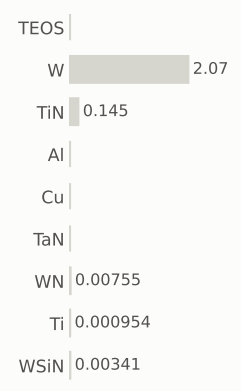

gases emitted (g)

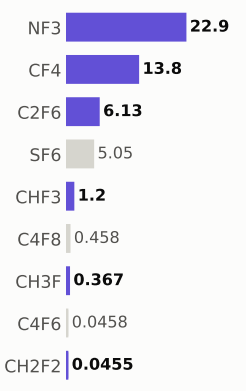

Step #20120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,124.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

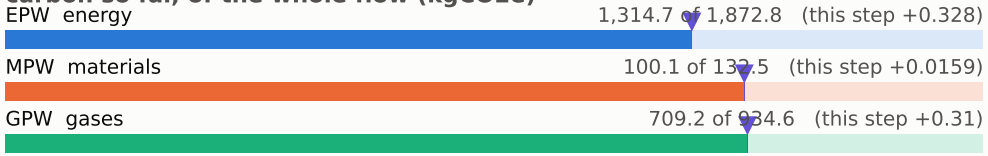

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

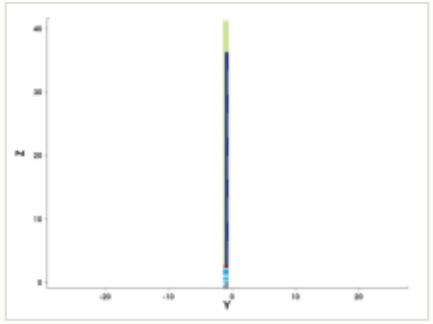

y cut at -1.035 µm

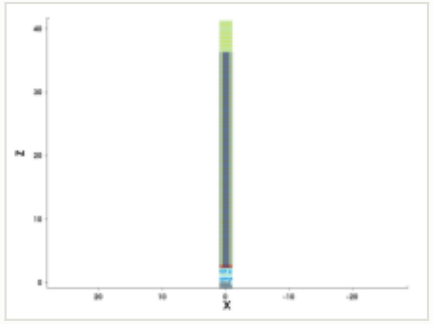

mask for this step

no mask for this step

steps by process area

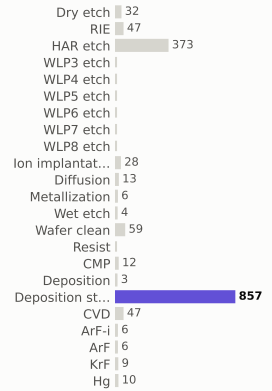

materials deposited (g)

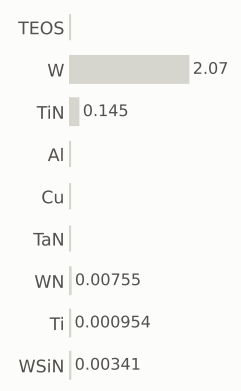

gases emitted (g)

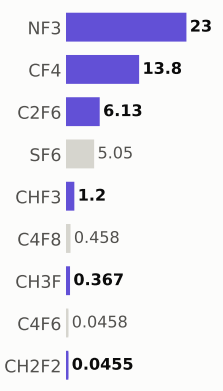

Step #20130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,124.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

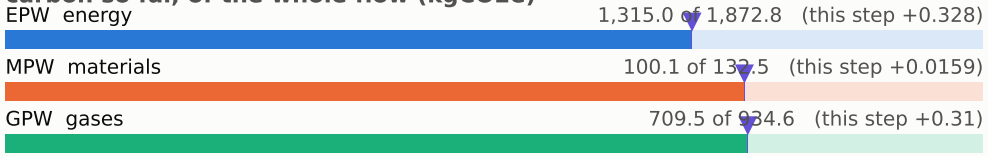

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

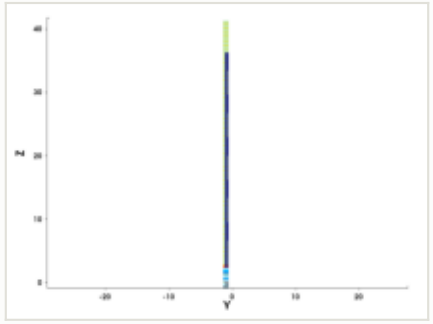

y cut at -1.035 µm

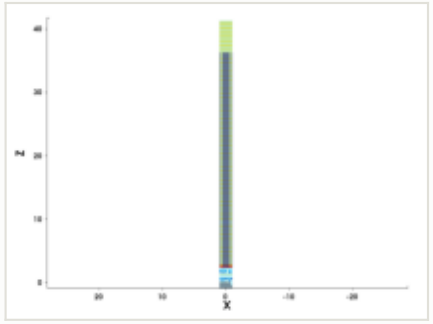

mask for this step

no mask for this step

steps by process area

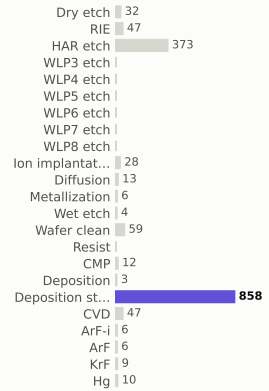

materials deposited (g)

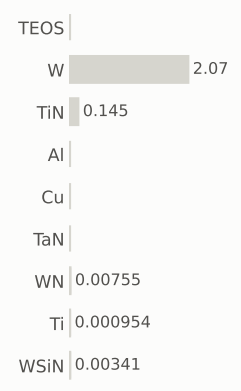

gases emitted (g)

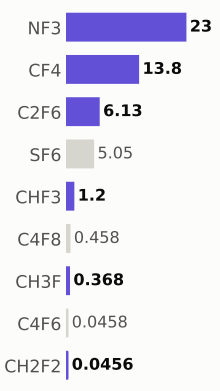

Step #20140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,125.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

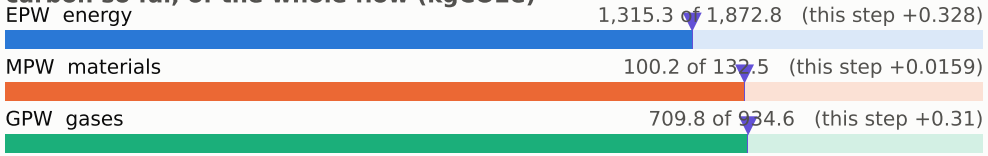

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

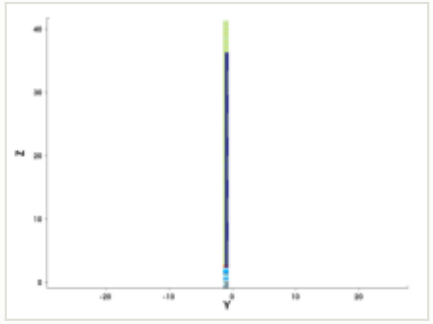

y cut at -1.035 µm

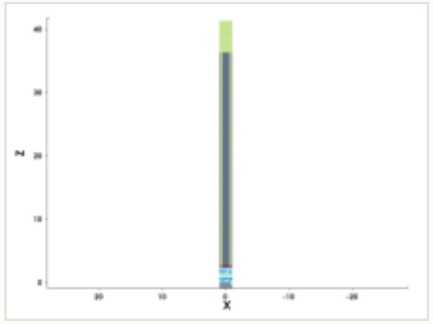

mask for this step

no mask for this step

steps by process area

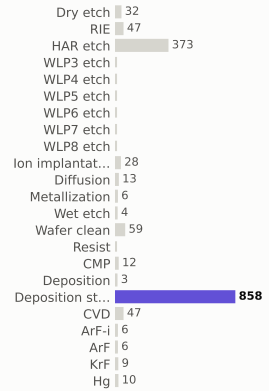

materials deposited (g)

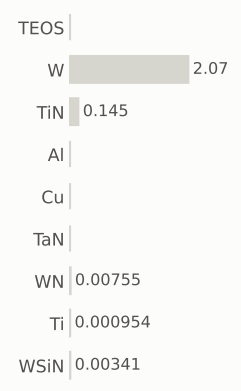

gases emitted (g)

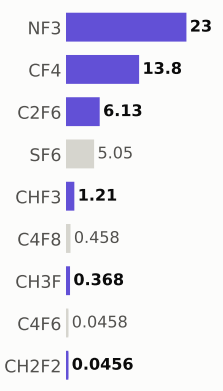

Step #20150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,126.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

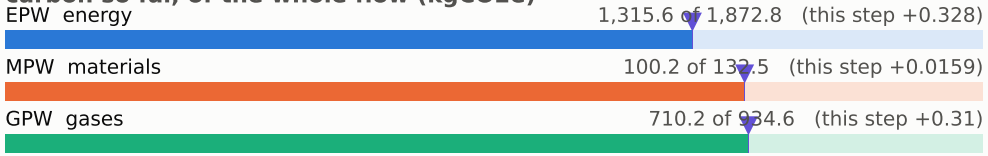

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

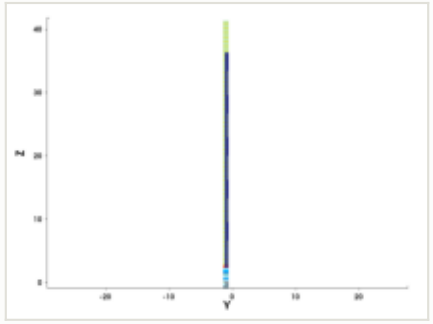

y cut at -1.035 µm

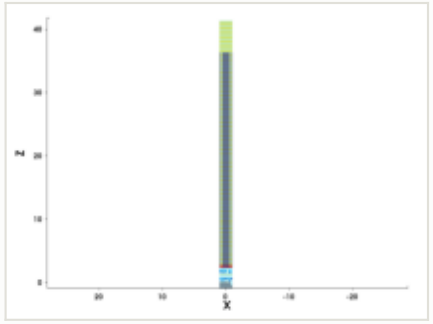

mask for this step

no mask for this step

steps by process area

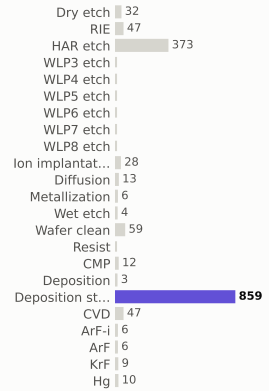

materials deposited (g)

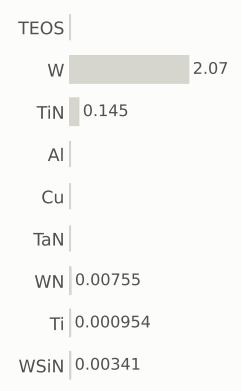

gases emitted (g)

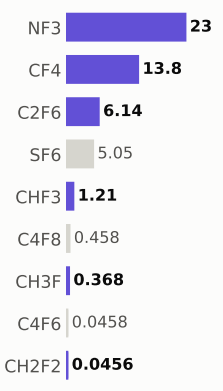

Step #20160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,126.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

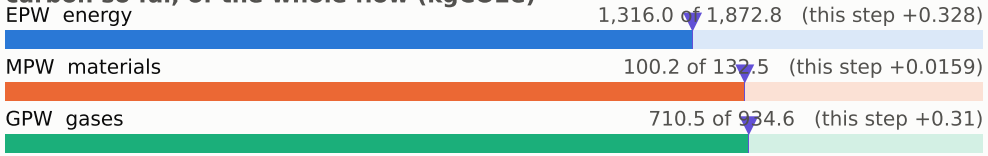

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

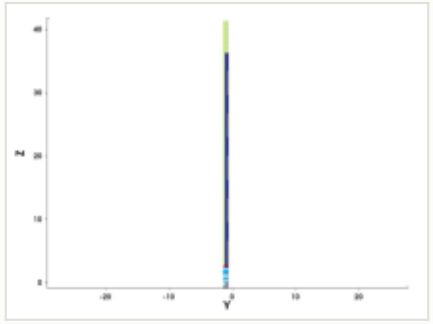

y cut at -1.035 µm

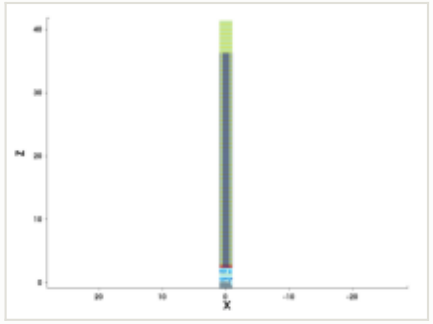

mask for this step

no mask for this step

steps by process area

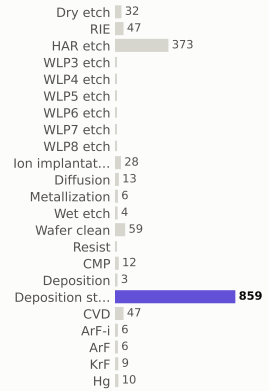

materials deposited (g)

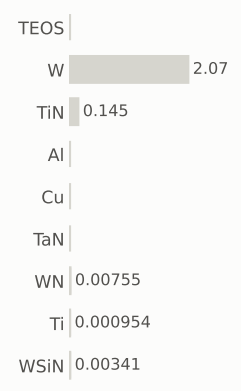

gases emitted (g)

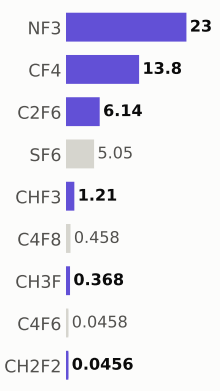

Step #20170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,127.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

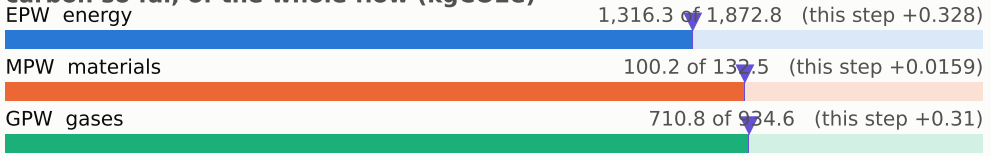

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

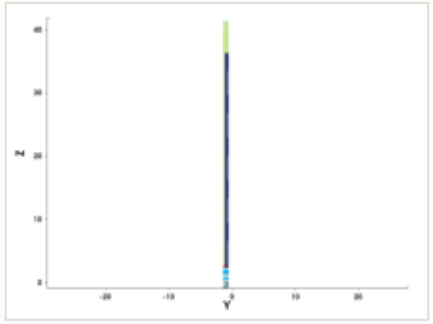

y cut at -1.035 µm

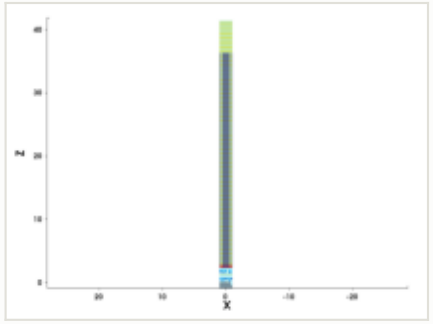

mask for this step

no mask for this step

steps by process area

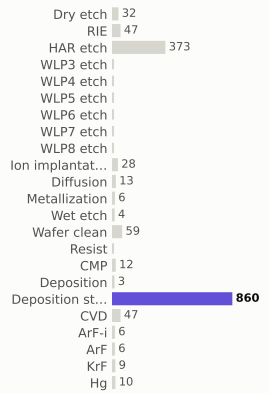

materials deposited (g)

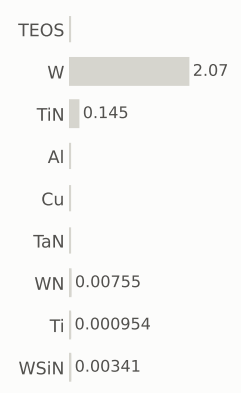

gases emitted (g)



Step #20180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,127.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

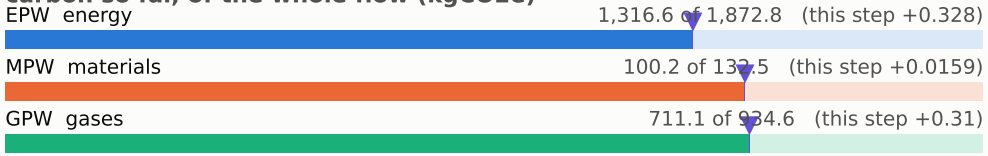

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

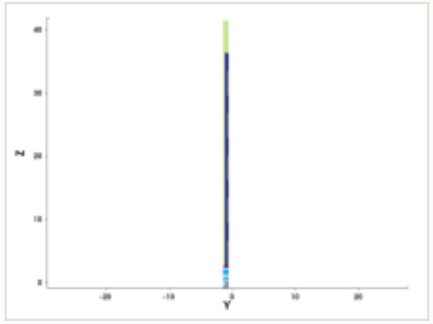

y cut at -1.035 µm

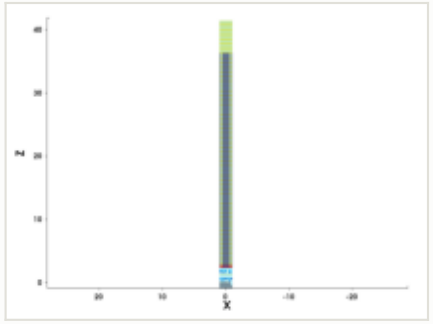

mask for this step

no mask for this step

steps by process area

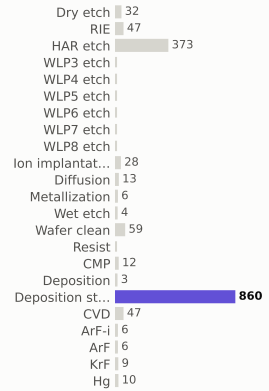

materials deposited (g)

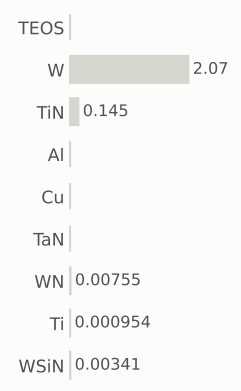

gases emitted (g)

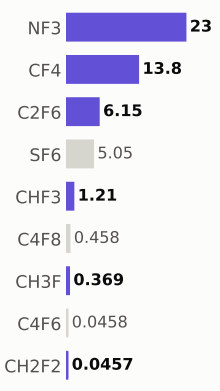

Step #20190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,128.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

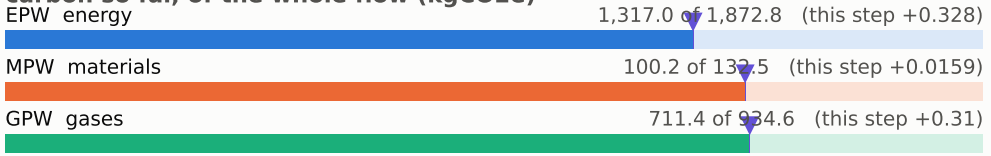

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

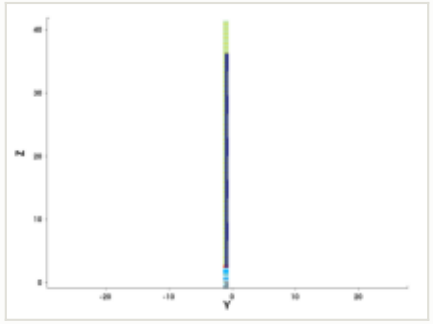

y cut at -1.035 µm

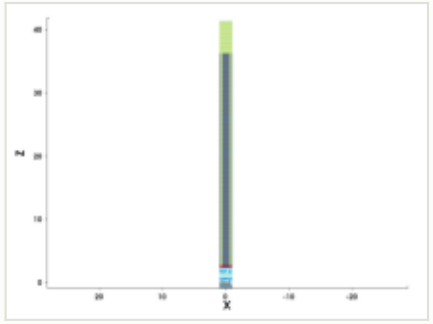

mask for this step

no mask for this step

steps by process area

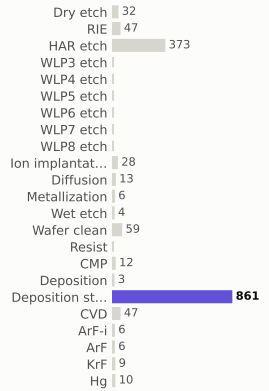

materials deposited (g)

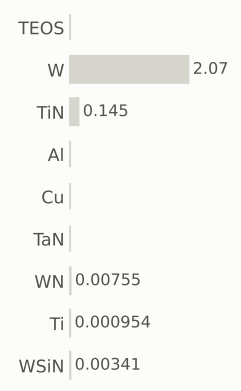

gases emitted (g)

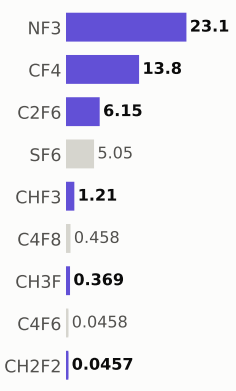

Step #20200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,129.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

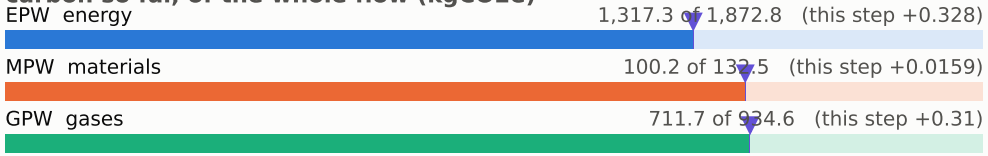

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

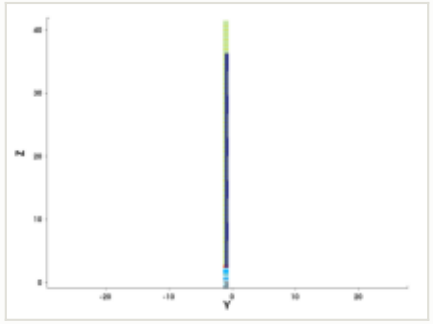

y cut at -1.035 µm

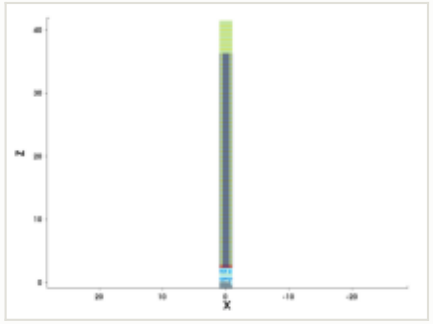

mask for this step

no mask for this step

steps by process area

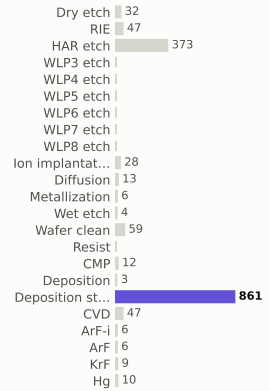

materials deposited (g)

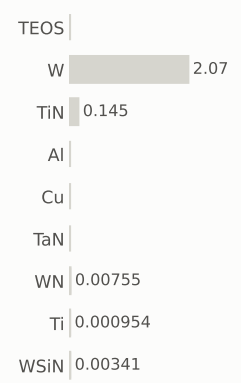

gases emitted (g)

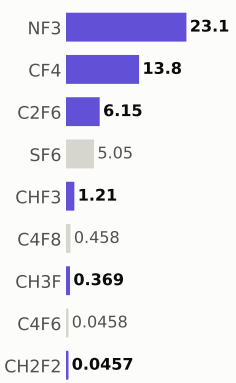

Step #20210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,129.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

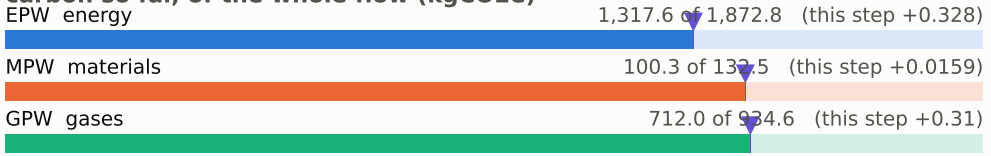

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

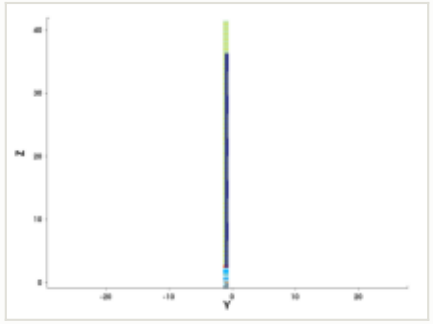

y cut at -1.035 µm

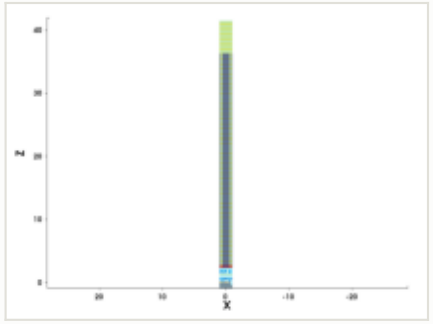

mask for this step

no mask for this step

steps by process area

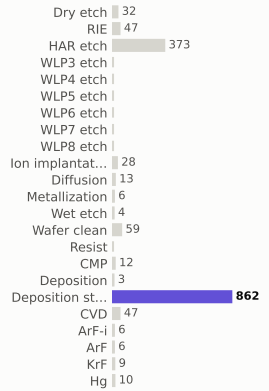

materials deposited (g)

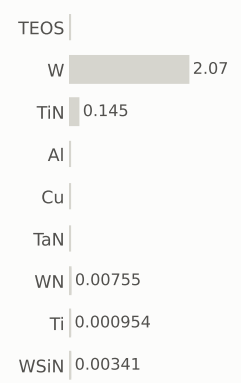

gases emitted (g)

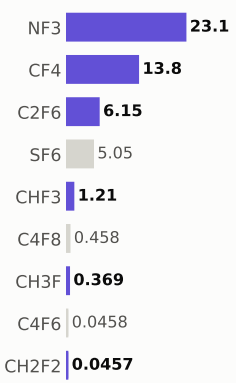

Step #20220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,130.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

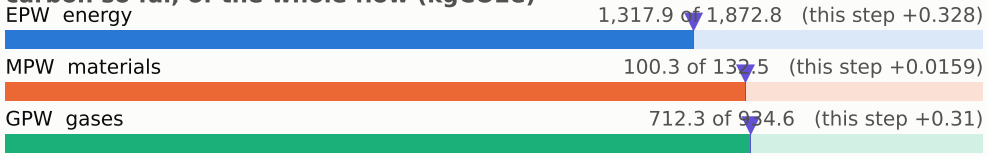

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

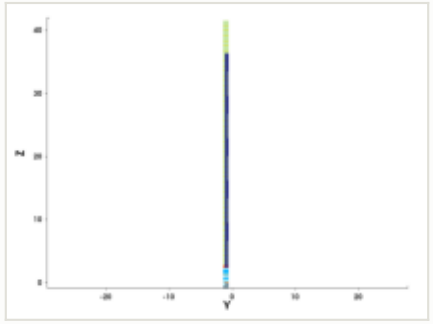

y cut at -1.035 µm

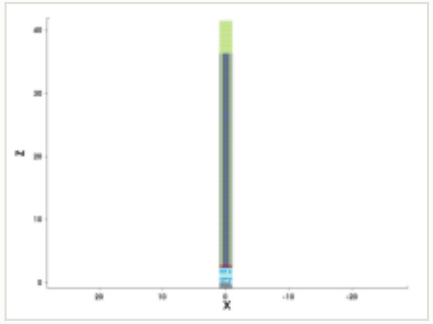

mask for this step

no mask for this step

steps by process area

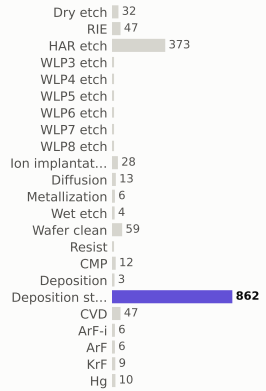

materials deposited (g)

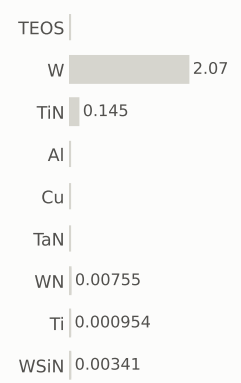

gases emitted (g)

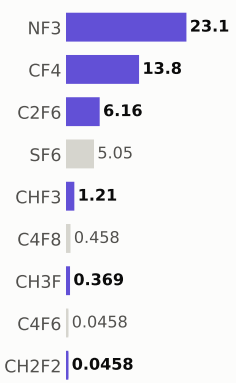

Step #20230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,131.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

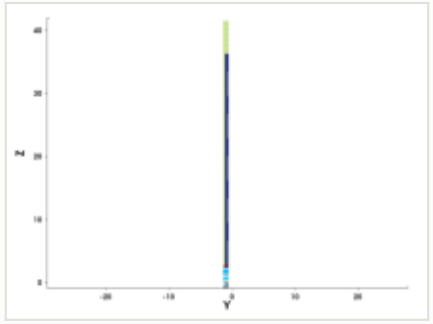

y cut at -1.035 µm

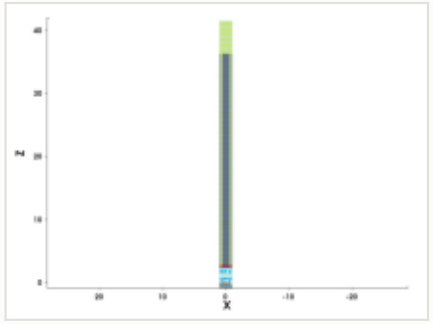

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

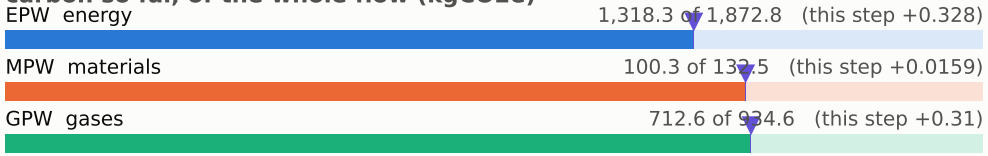

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

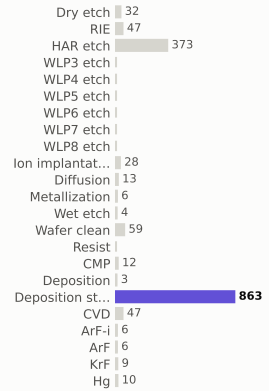

materials deposited (g)

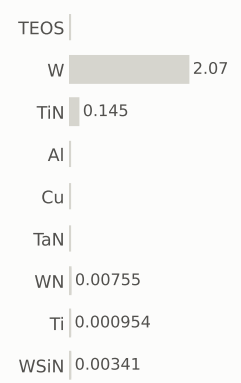

gases emitted (g)

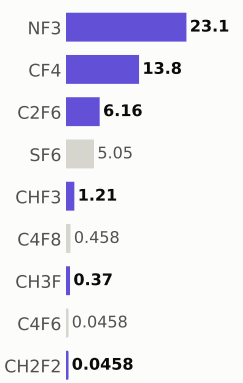

Step #20240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,131.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

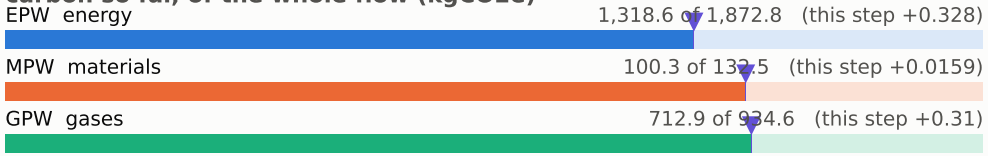

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

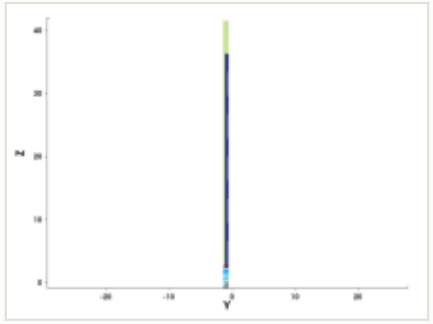

y cut at -1.035 µm

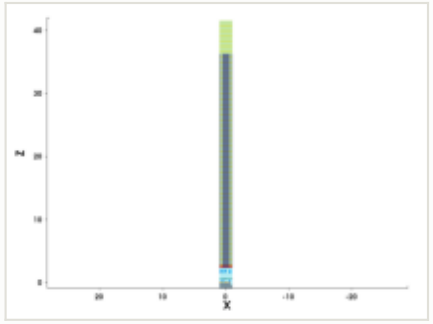

mask for this step

no mask for this step

steps by process area

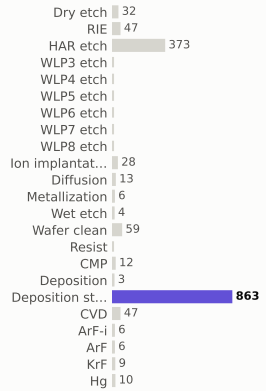

materials deposited (g)

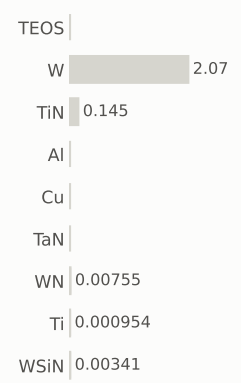

gases emitted (g)

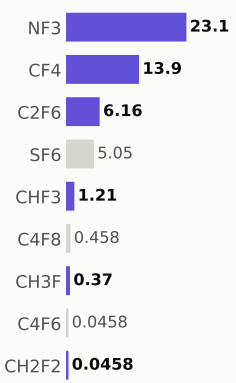

Step #20250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,132.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

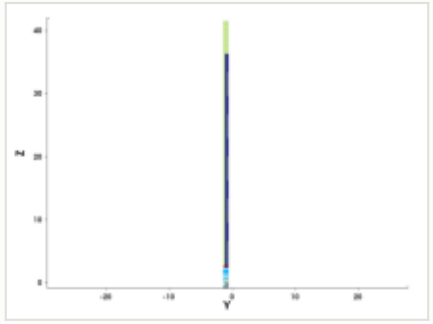

y cut at -1.035 µm

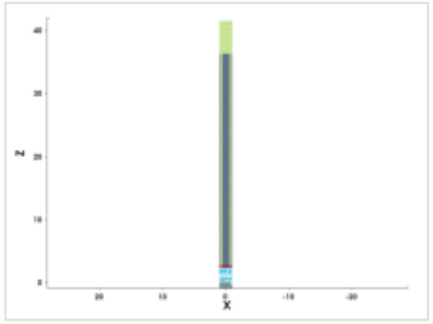

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

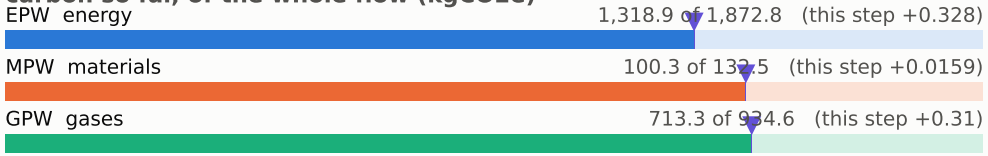

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

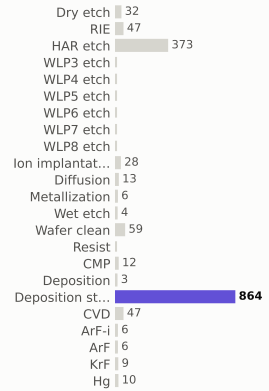

materials deposited (g)

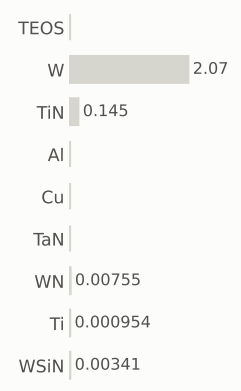

gases emitted (g)

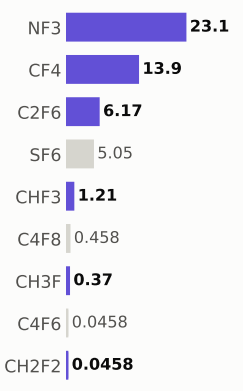

Step #20260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,133.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

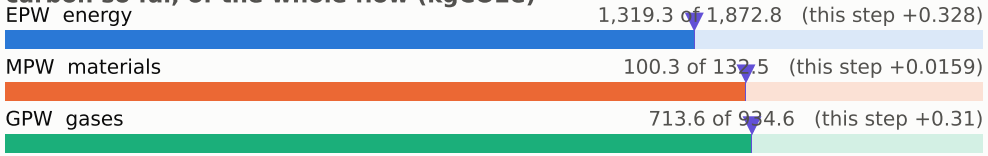

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

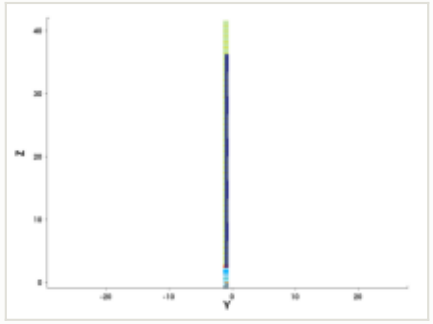

y cut at -1.035 µm

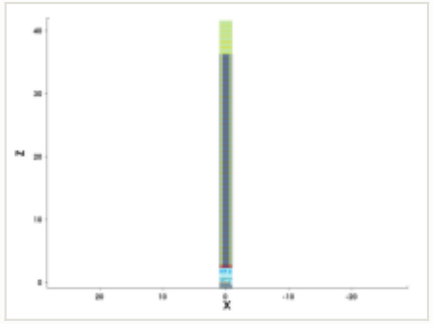

mask for this step

no mask for this step

steps by process area

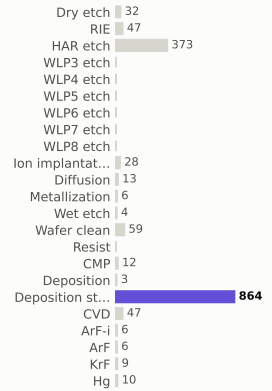

materials deposited (g)

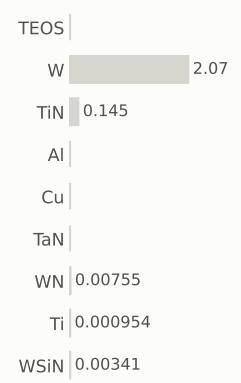

gases emitted (g)

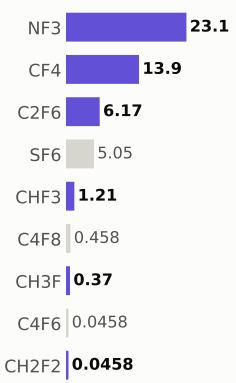

Step #20270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,133.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

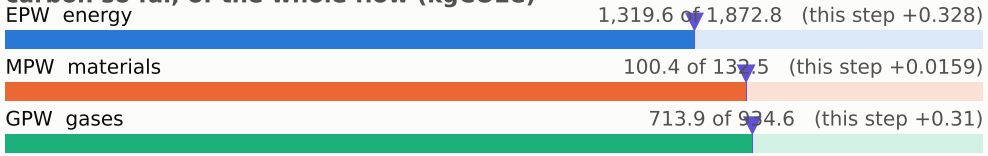

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

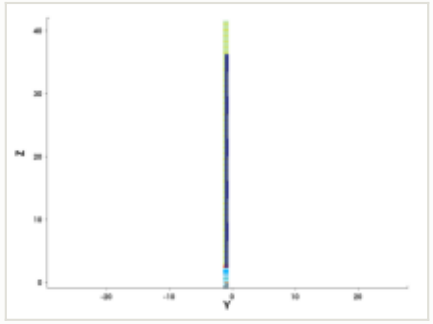

y cut at -1.035 µm

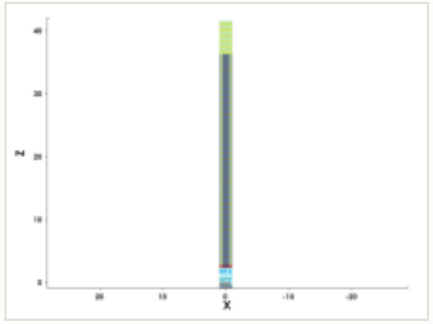

mask for this step

no mask for this step

steps by process area

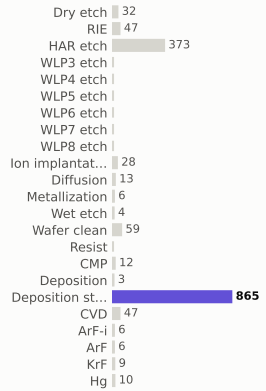

materials deposited (g)

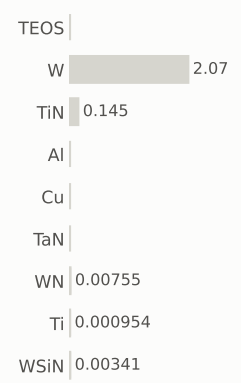

gases emitted (g)

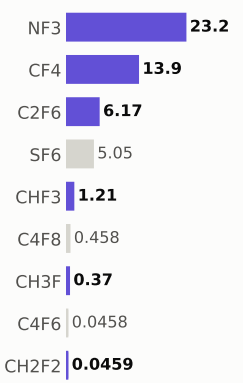

Step #20280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,134.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

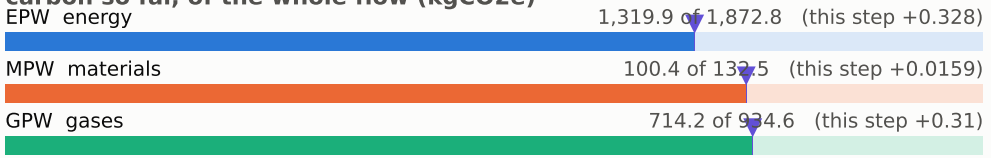

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

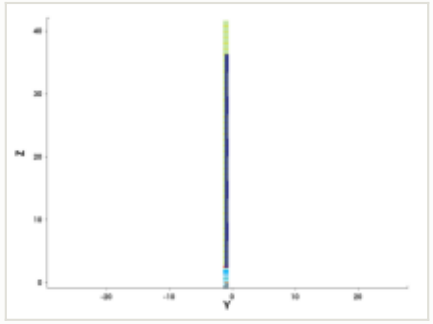

y cut at -1.035 µm

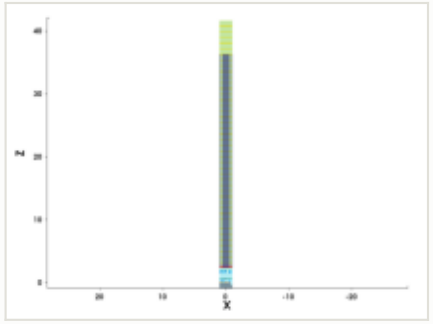

mask for this step

no mask for this step

steps by process area

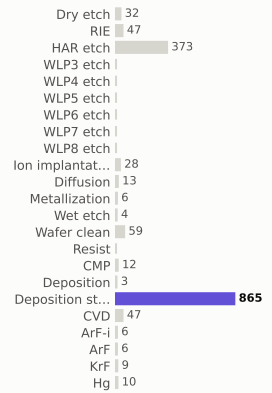

materials deposited (g)

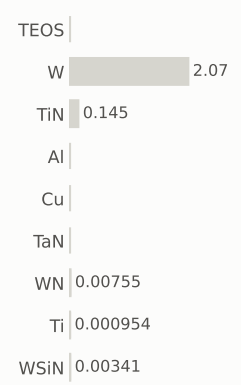

gases emitted (g)

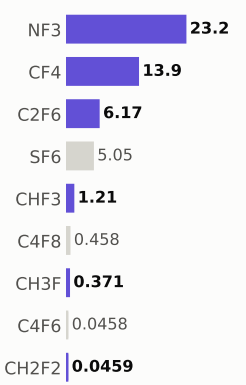

Step #20290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,135.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

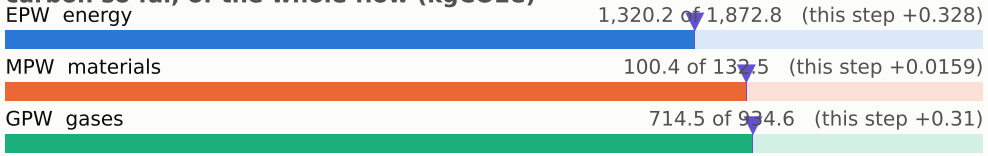

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

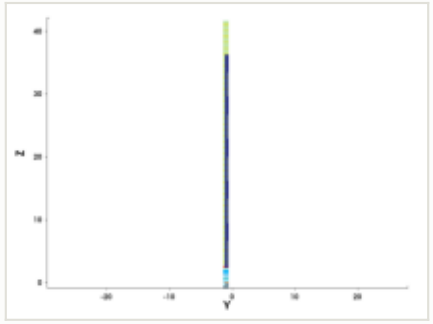

y cut at -1.035 µm

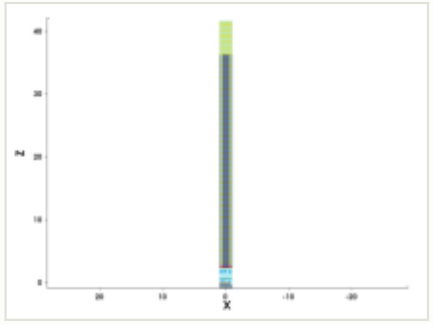

mask for this step

no mask for this step

steps by process area

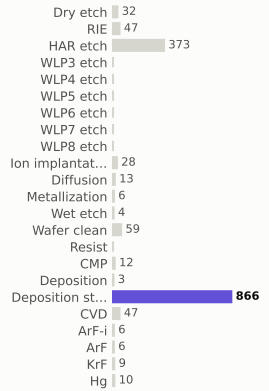

materials deposited (g)

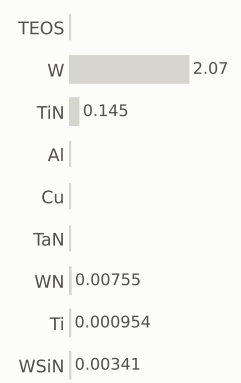

gases emitted (g)

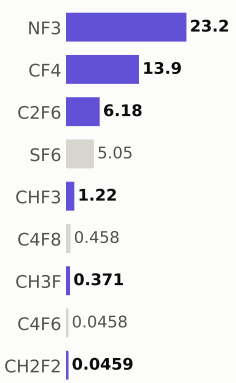

Step #20300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,135.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

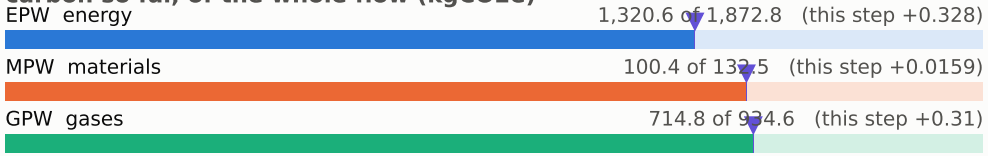

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

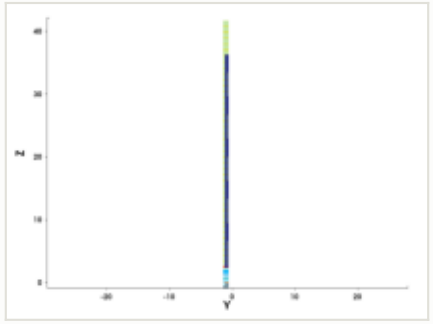

y cut at -1.035 µm

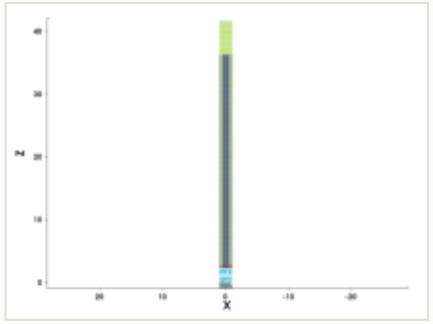

mask for this step

no mask for this step

steps by process area

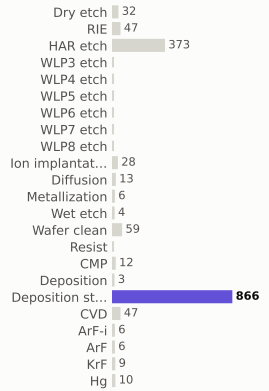

materials deposited (g)

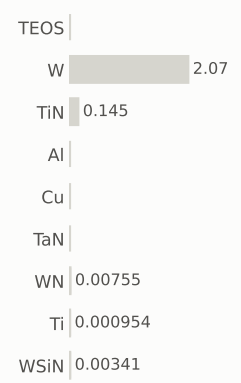

gases emitted (g)

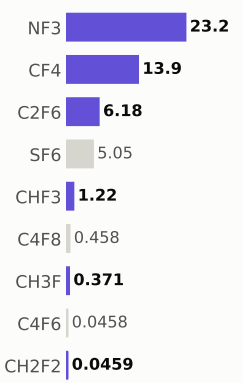

Step #20310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,136.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

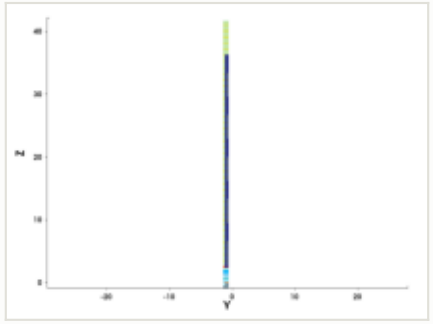

y cut at -1.035 µm

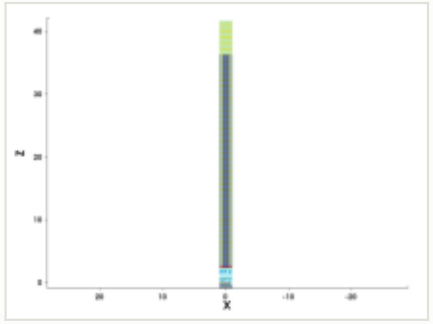

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

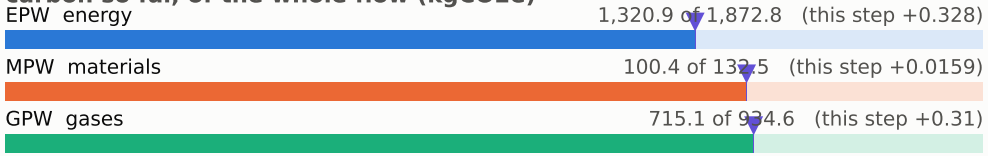

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

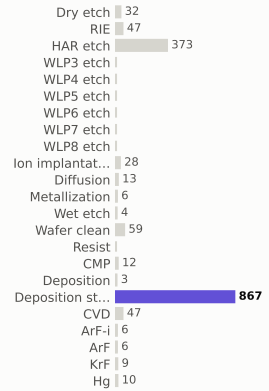

materials deposited (g)

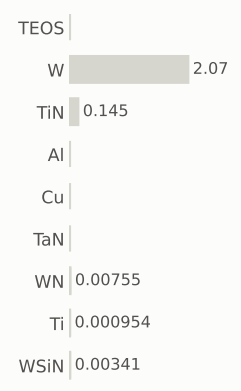

gases emitted (g)

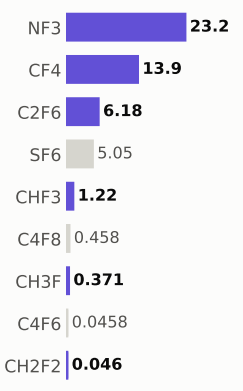

Step #20320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,137.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

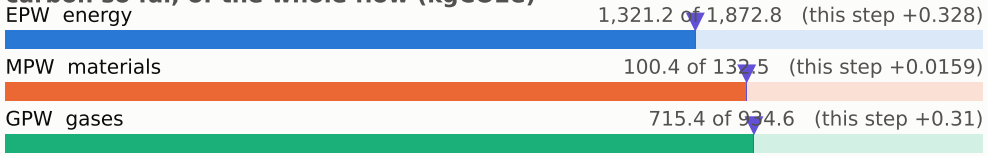

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

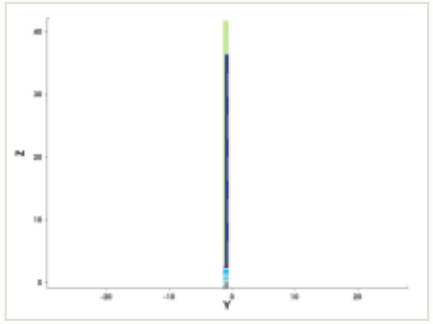

y cut at -1.035 µm

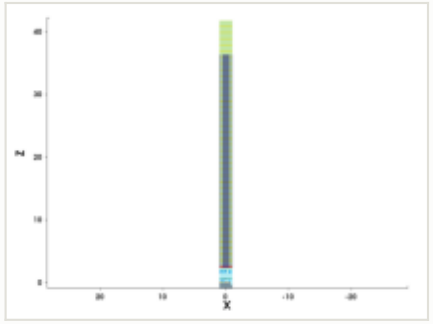

mask for this step

no mask for this step

steps by process area

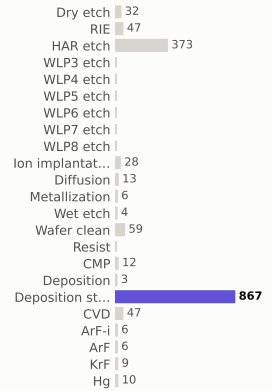

materials deposited (g)

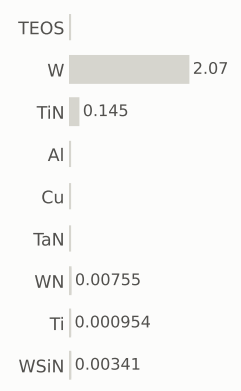

gases emitted (g)

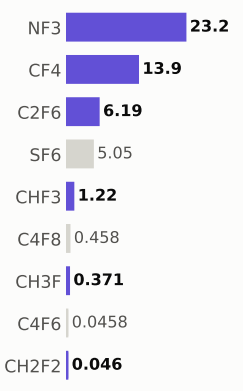

Step #20330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,137.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

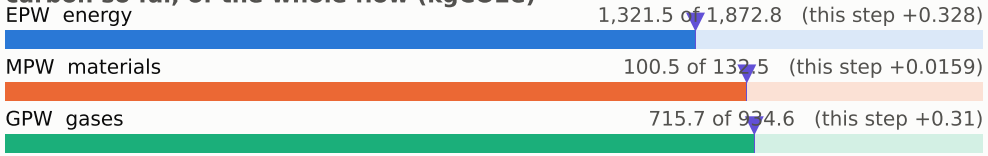

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

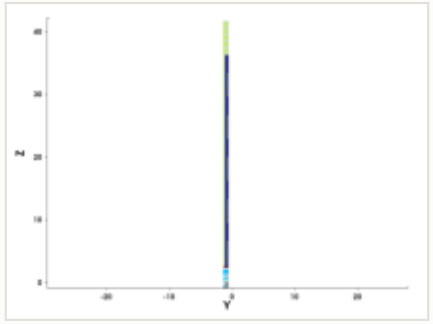

y cut at -1.035 µm

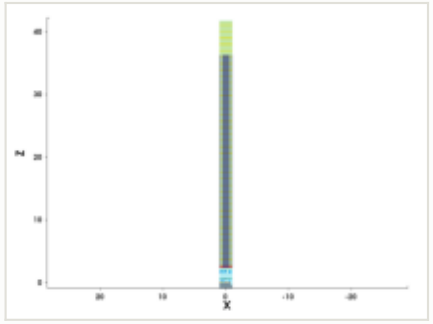

mask for this step

no mask for this step

steps by process area

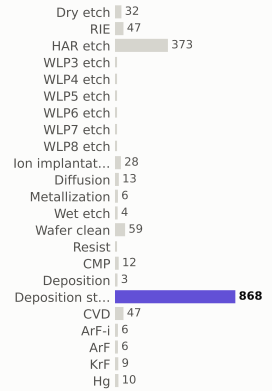

materials deposited (g)

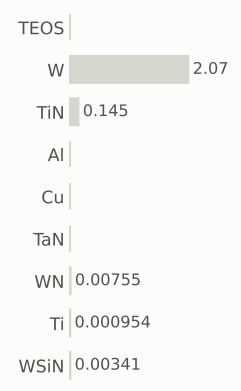

gases emitted (g)

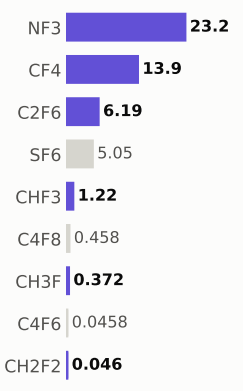

Step #20340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,138.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

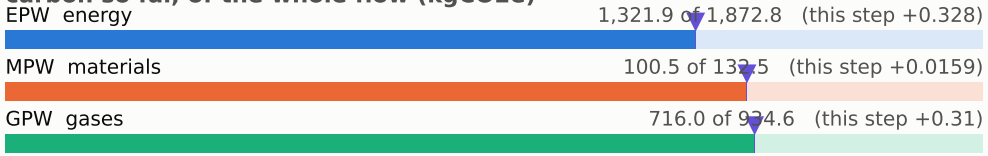

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

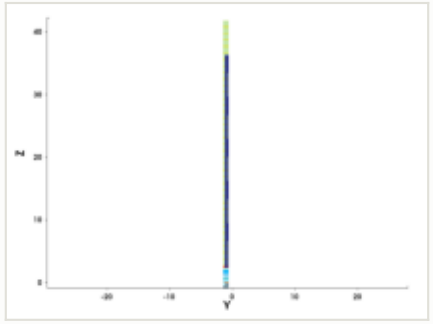

y cut at -1.035 µm

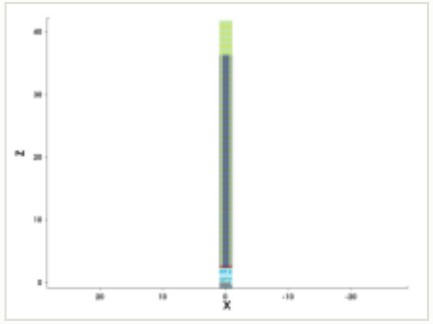

mask for this step

no mask for this step

steps by process area

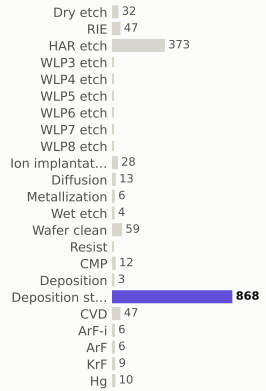

materials deposited (g)

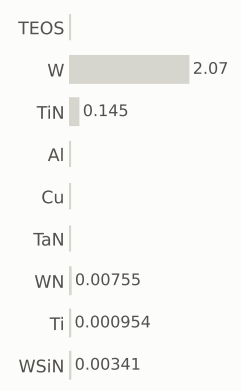

gases emitted (g)

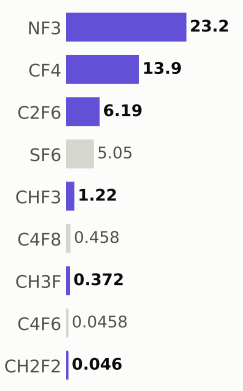

Step #20350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,139.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

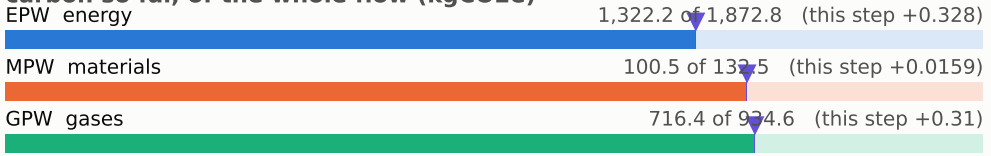

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

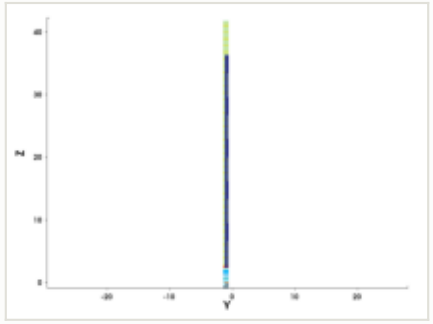

y cut at -1.035 µm

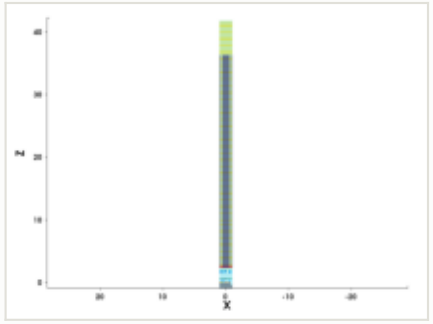

mask for this step

no mask for this step

steps by process area

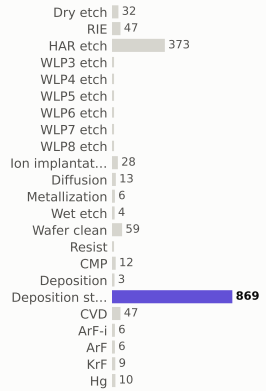

materials deposited (g)

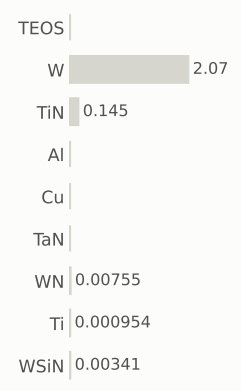

gases emitted (g)

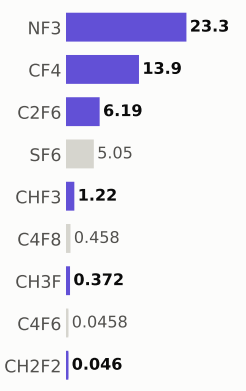

Step #20360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,139.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

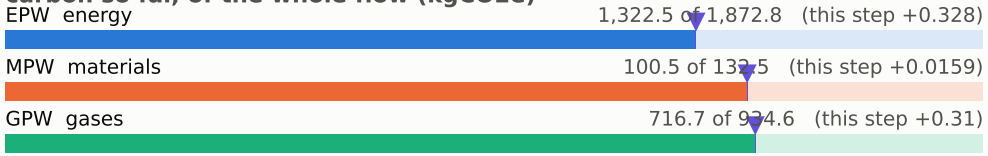

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

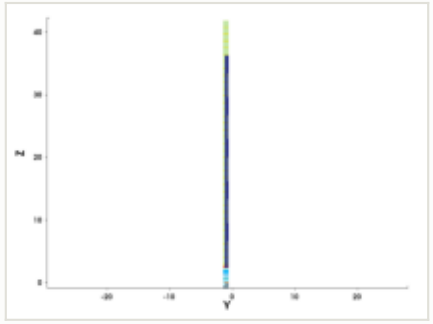

y cut at -1.035 µm

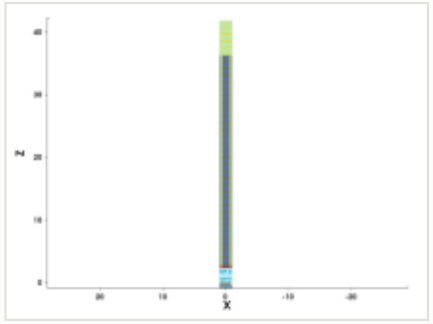

mask for this step

no mask for this step

steps by process area

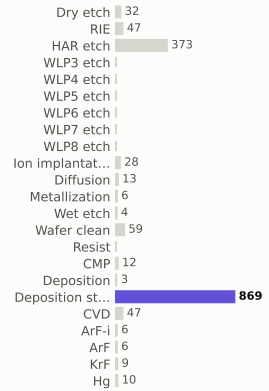

materials deposited (g)

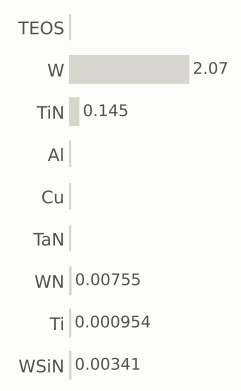

gases emitted (g)

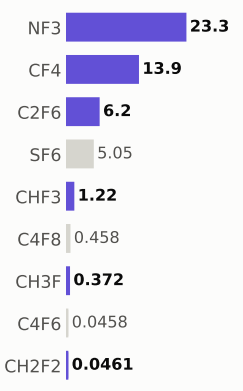

Step #20370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,140.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

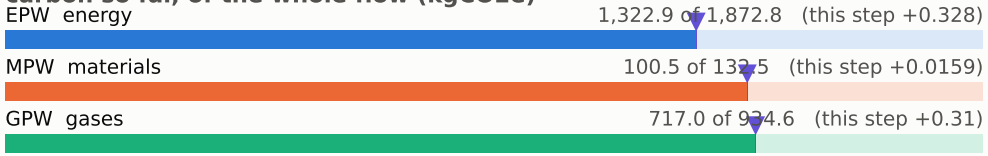

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

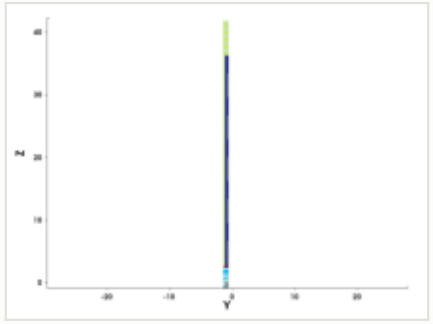

y cut at -1.035 µm

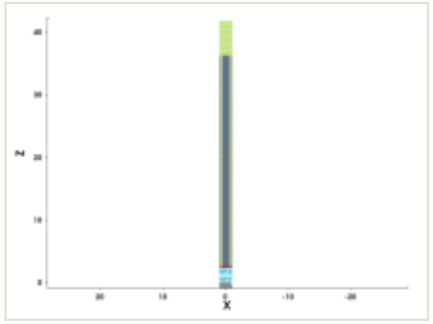

mask for this step

no mask for this step

steps by process area

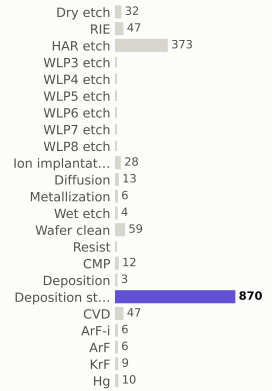

materials deposited (g)

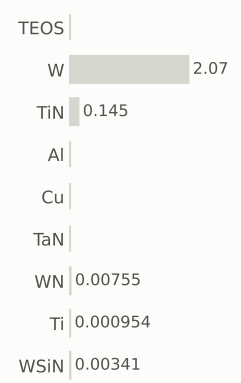

gases emitted (g)

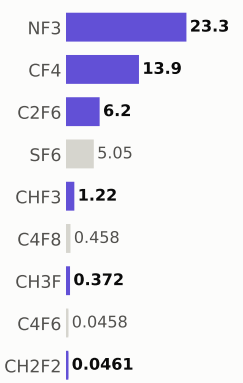

Step #20380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,141.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

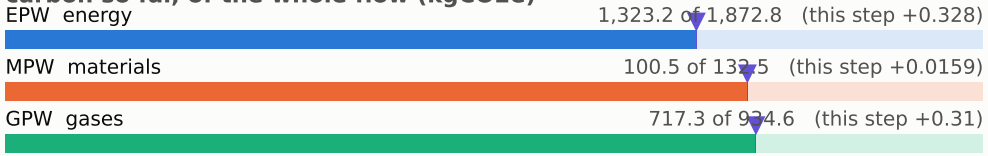

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

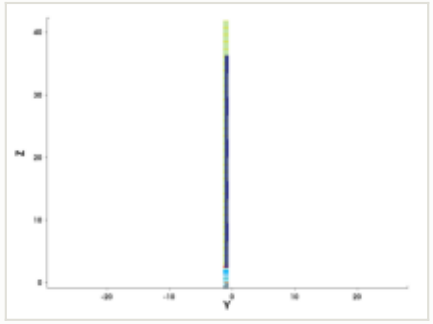

y cut at -1.035 µm

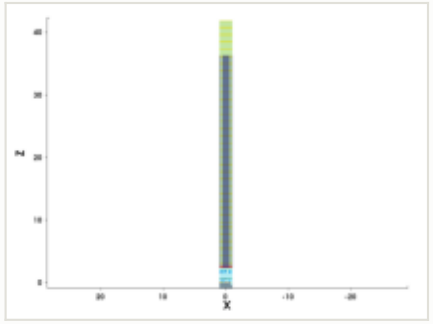

mask for this step

no mask for this step

steps by process area

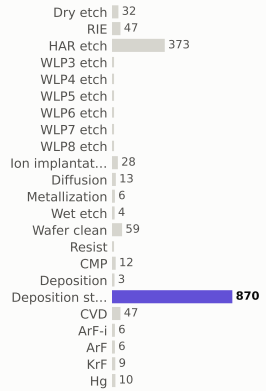

materials deposited (g)

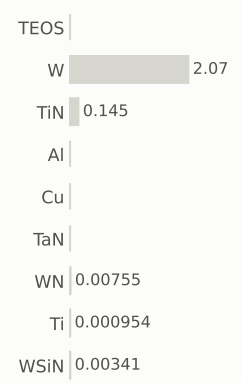

gases emitted (g)

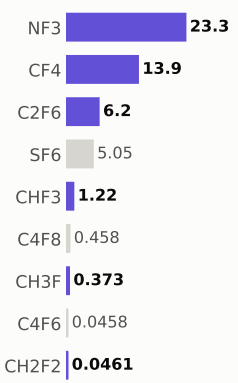

Step #20390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,141.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

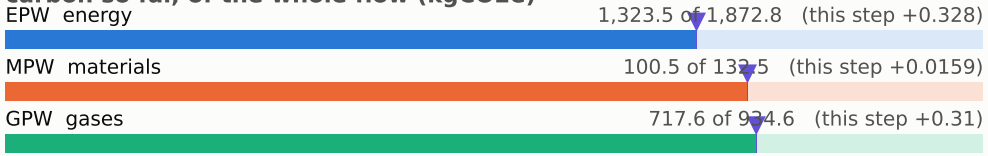

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

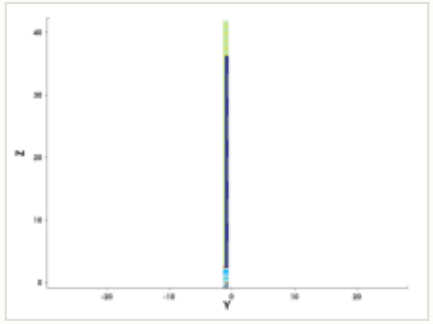

y cut at -1.035 µm

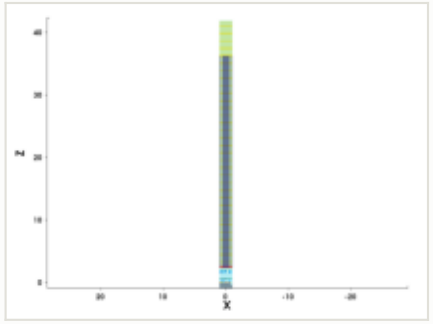

mask for this step

no mask for this step

steps by process area

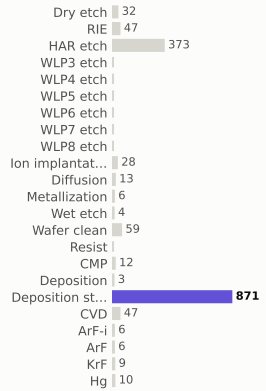

materials deposited (g)

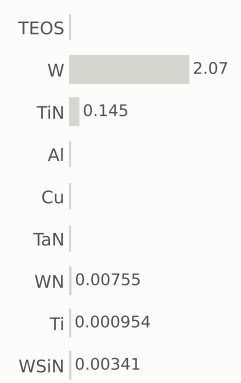

gases emitted (g)

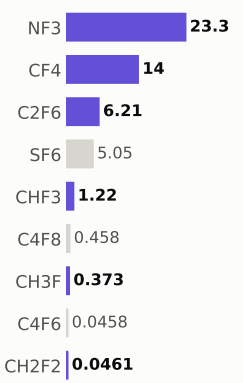

Step #20400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,142.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

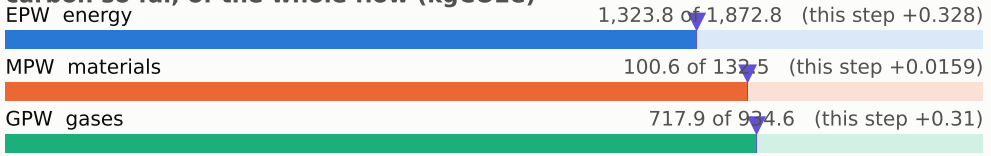

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

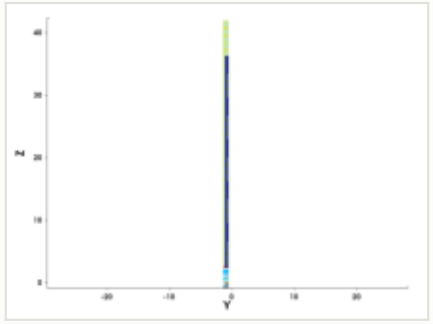

y cut at -1.035 µm

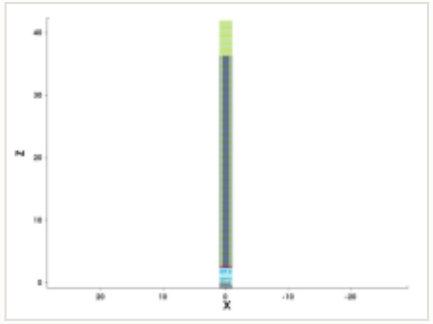

mask for this step

no mask for this step

steps by process area

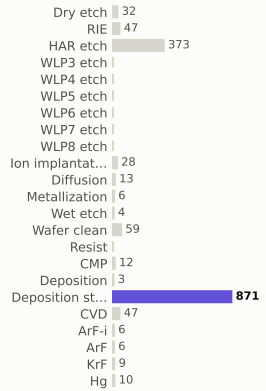

materials deposited (g)

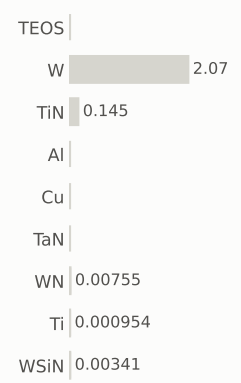

gases emitted (g)

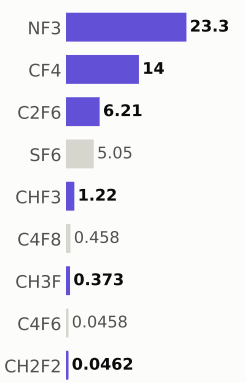

Step #20410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,143.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

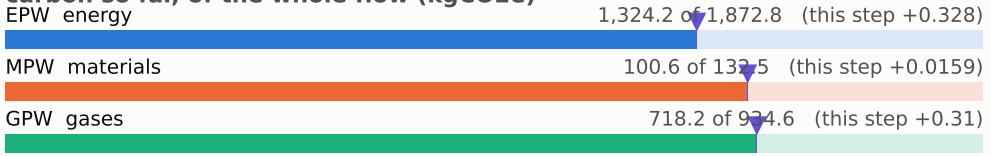

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

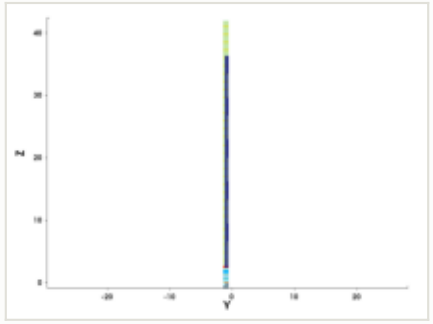

y cut at -1.035 µm

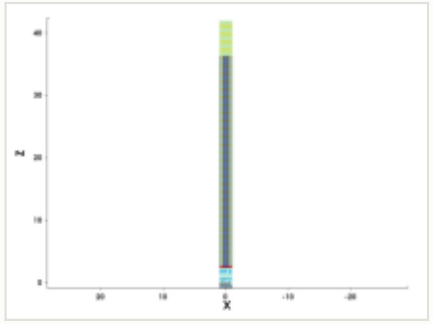

mask for this step

no mask for this step

steps by process area

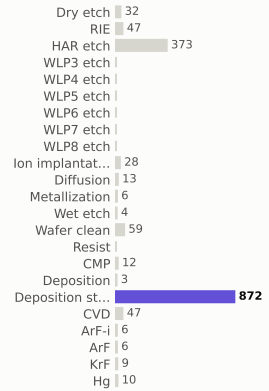

materials deposited (g)

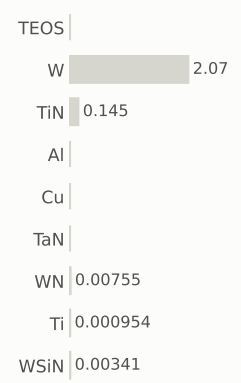

gases emitted (g)

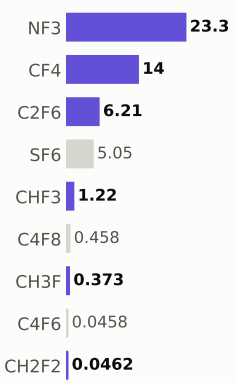

Step #20420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,143.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

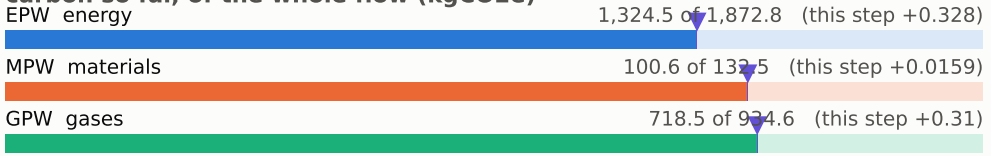

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

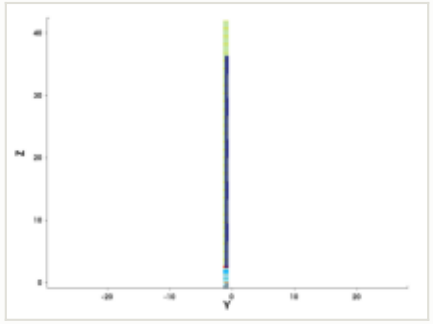

y cut at -1.035 µm

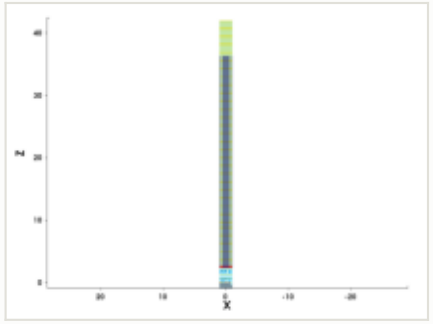

mask for this step

no mask for this step

steps by process area

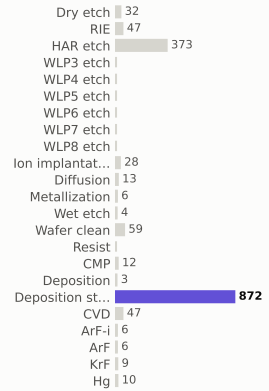

materials deposited (g)

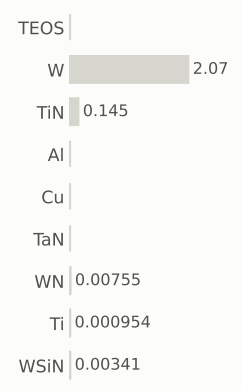

gases emitted (g)

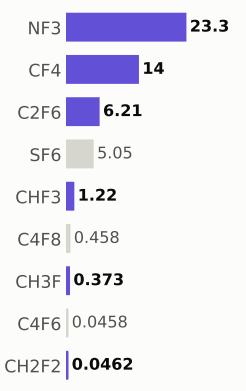

Step #20430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,144.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

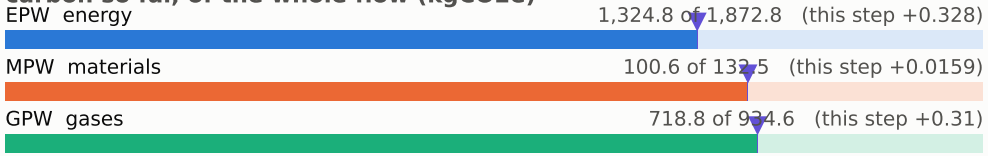

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

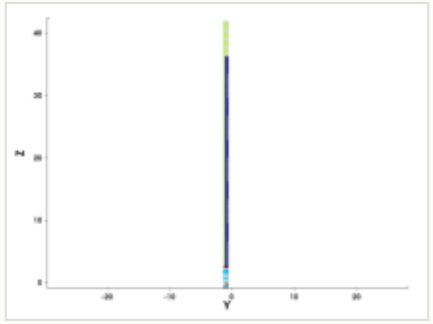

y cut at -1.035 µm

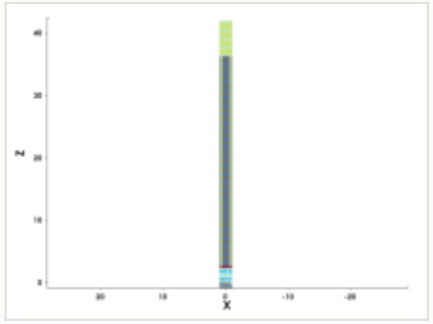

mask for this step

no mask for this step

steps by process area

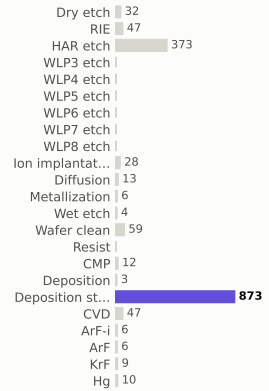

materials deposited (g)

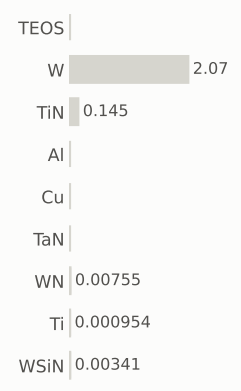

gases emitted (g)

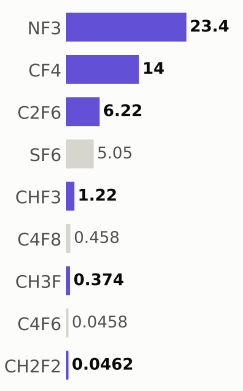

Step #20440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,144.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

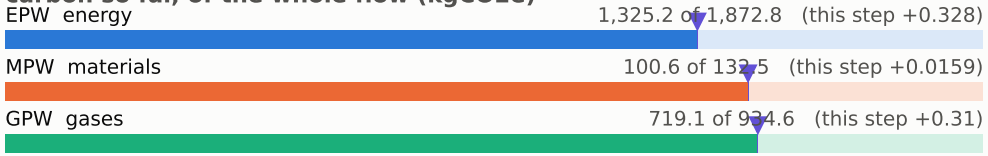

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

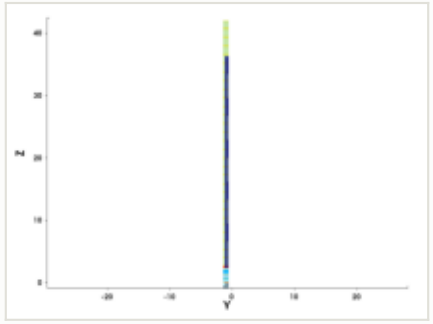

y cut at -1.035 µm

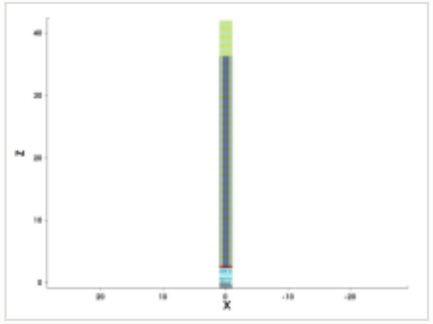

mask for this step

no mask for this step

steps by process area

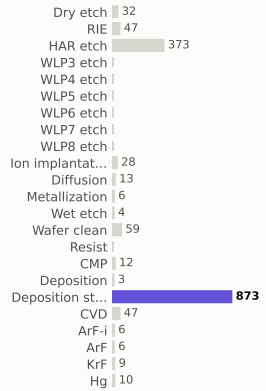

materials deposited (g)

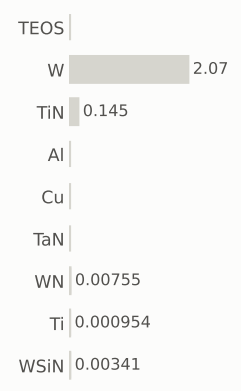

gases emitted (g)

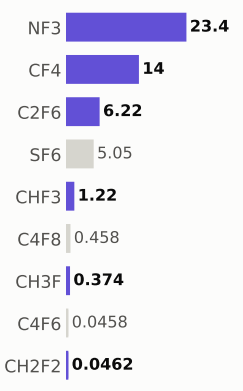

Step #20450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,145.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

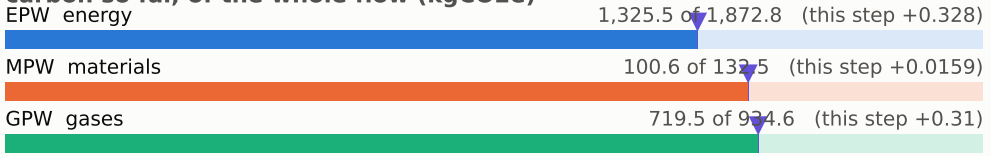

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

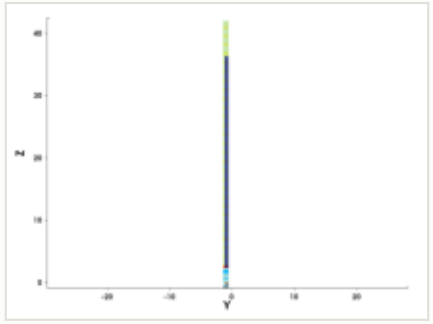

y cut at -1.035 µm

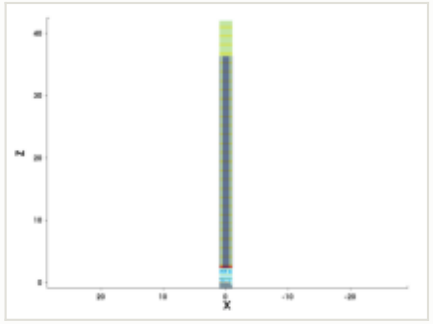

mask for this step

no mask for this step

steps by process area

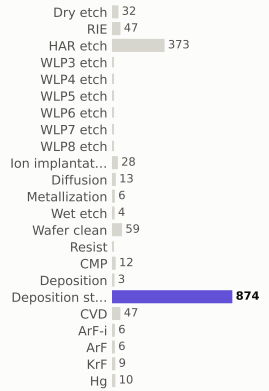

materials deposited (g)

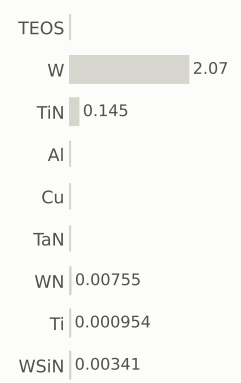

gases emitted (g)

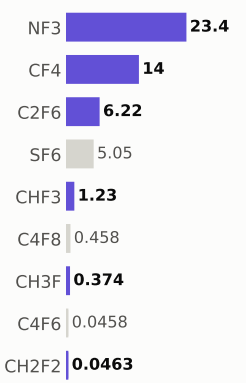

Step #20460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,146.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

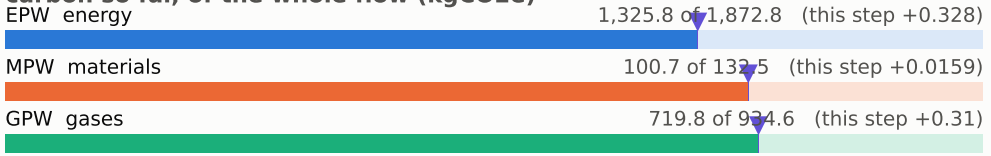

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

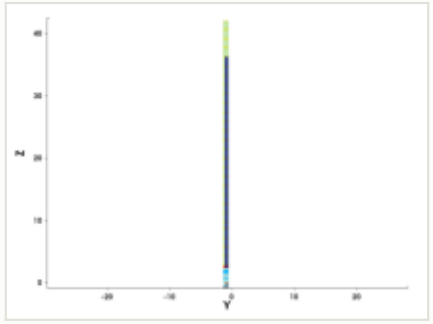

y cut at -1.035 µm

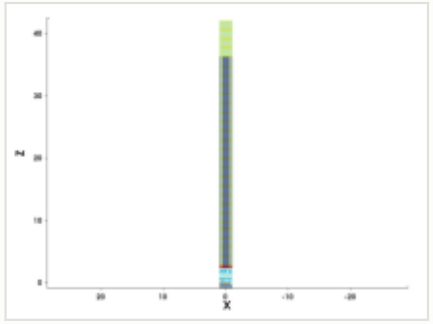

mask for this step

no mask for this step

steps by process area

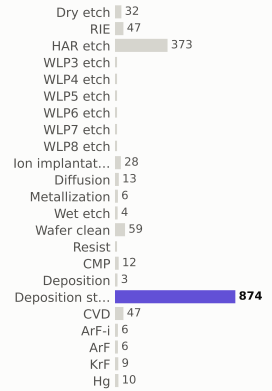

materials deposited (g)

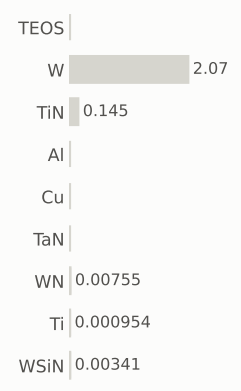

gases emitted (g)

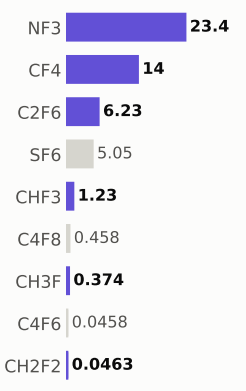

Step #20470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,146.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

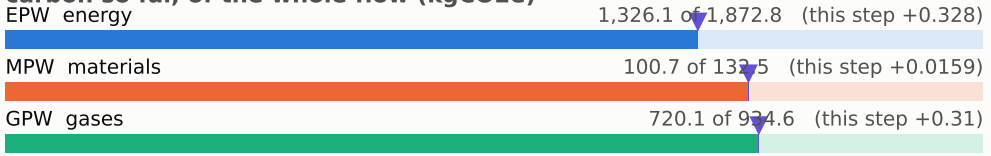

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

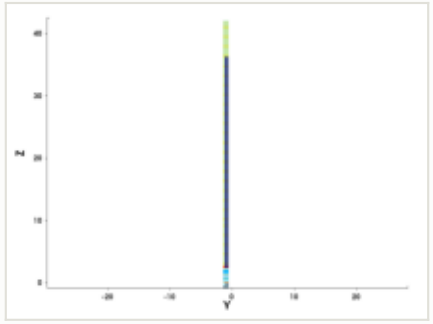

y cut at -1.035 µm

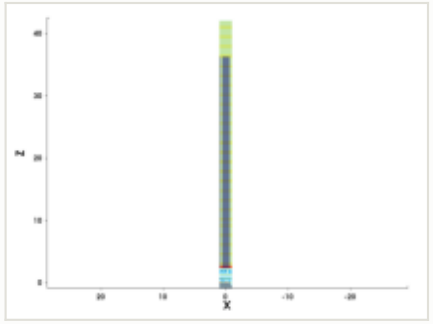

mask for this step

no mask for this step

steps by process area

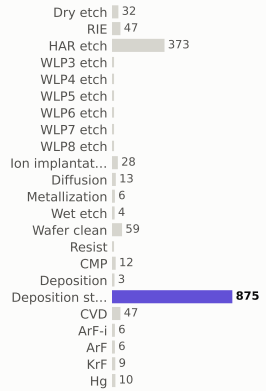

materials deposited (g)

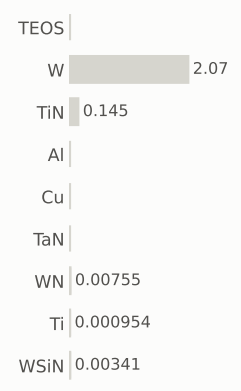

gases emitted (g)

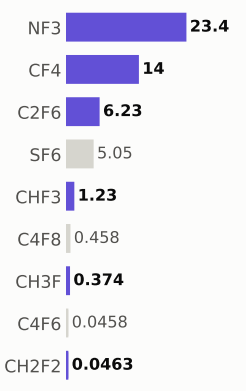

Step #20480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,147.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

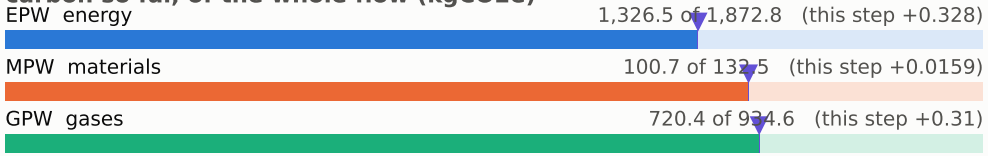

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

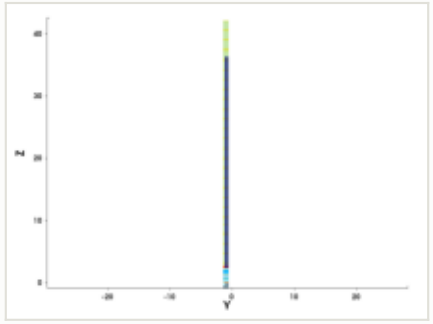

y cut at -1.035 µm

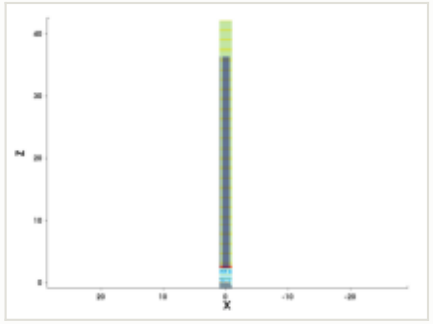

mask for this step

no mask for this step

steps by process area

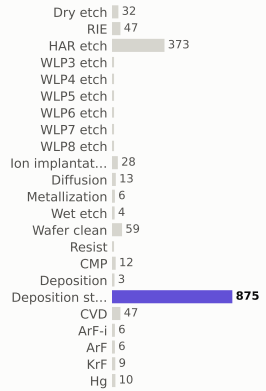

materials deposited (g)

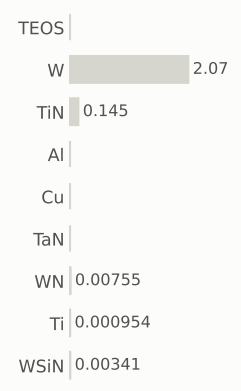

gases emitted (g)

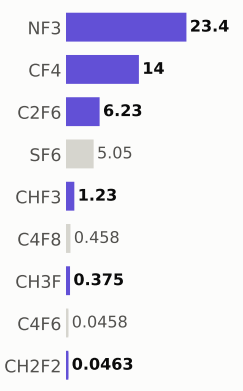

Step #20490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,148.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

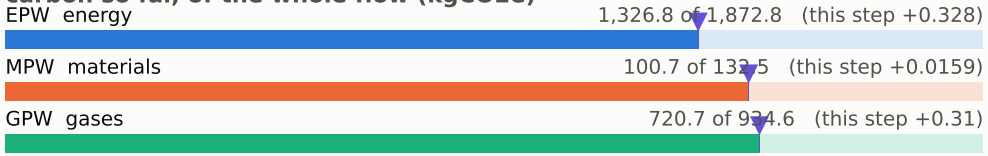

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

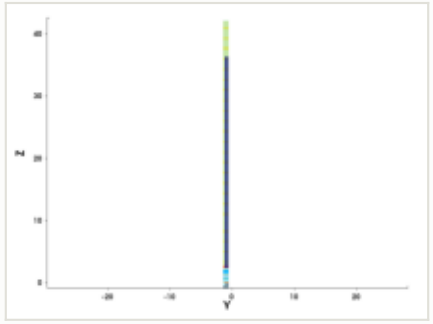

y cut at -1.035 µm

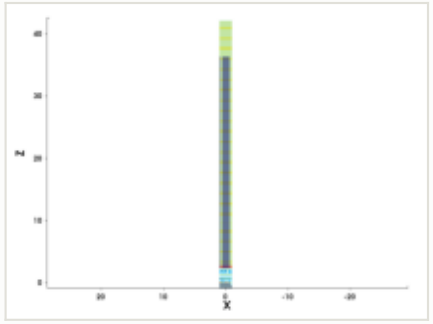

mask for this step

no mask for this step

steps by process area

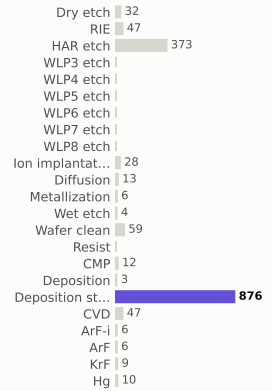

materials deposited (g)

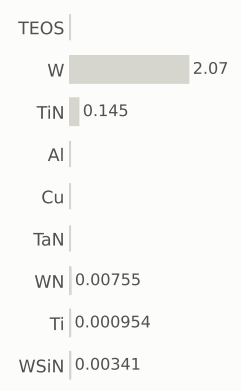

gases emitted (g)

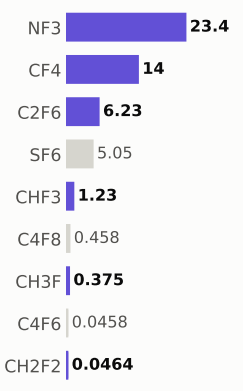

Step #20500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,148.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

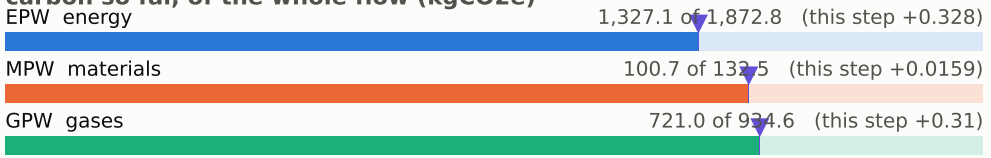

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

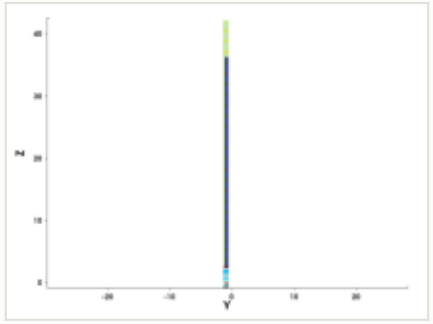

y cut at -1.035 µm

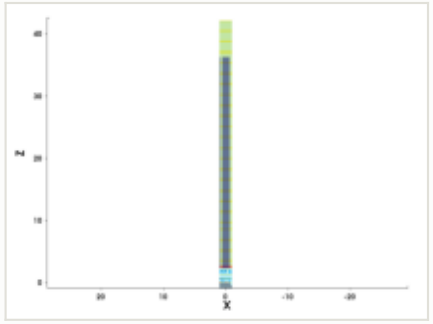

mask for this step

no mask for this step

steps by process area

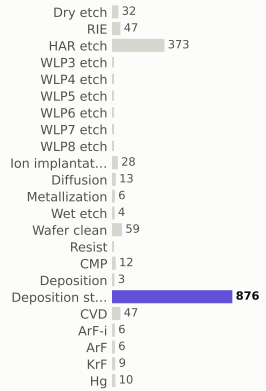

materials deposited (g)

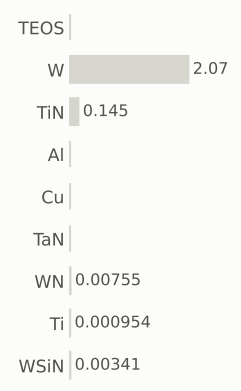

gases emitted (g)

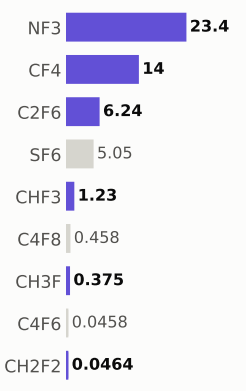

Step #20510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,149.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

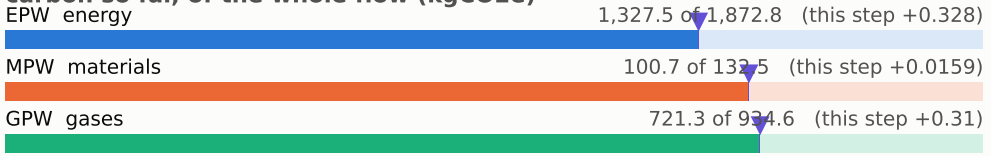

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

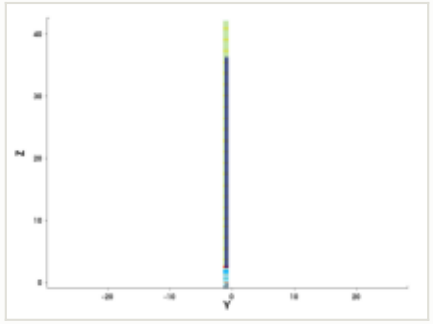

y cut at -1.035 µm

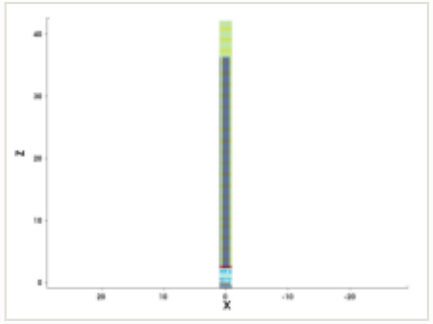

mask for this step

no mask for this step

steps by process area

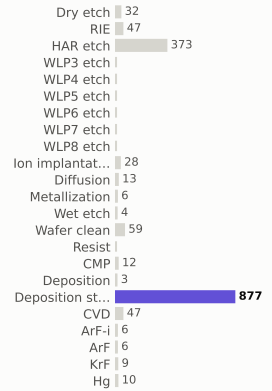

materials deposited (g)

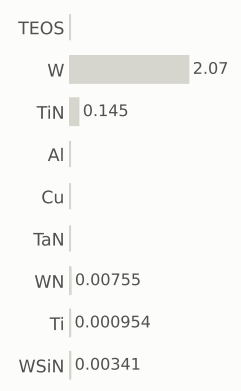

gases emitted (g)

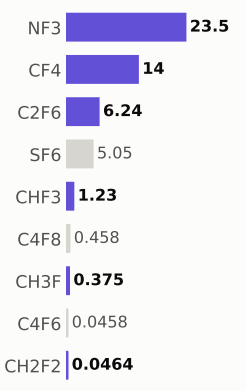

Step #20520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,150.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

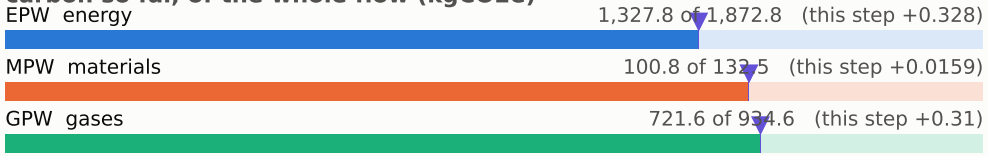

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

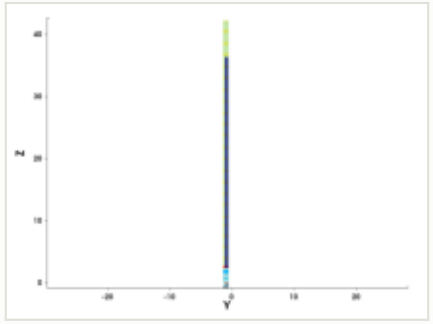

y cut at -1.035 µm

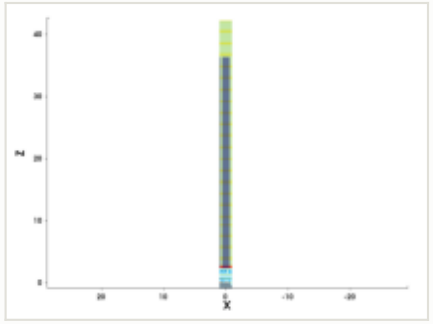

mask for this step

no mask for this step

steps by process area

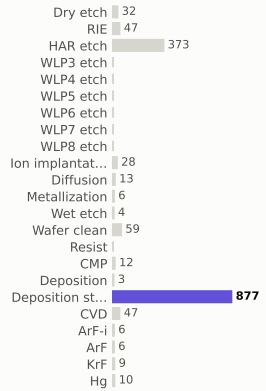

materials deposited (g)

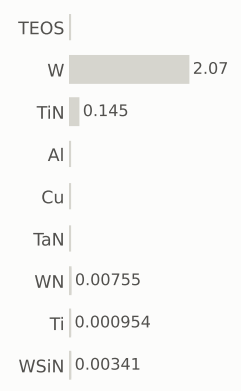

gases emitted (g)

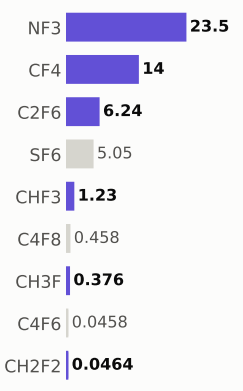

Step #20530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,150.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

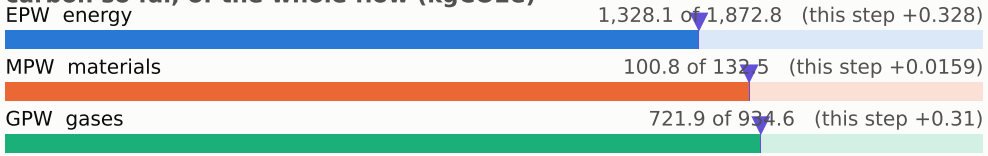

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

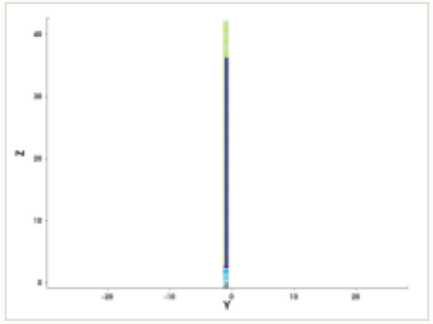

y cut at -1.035 µm

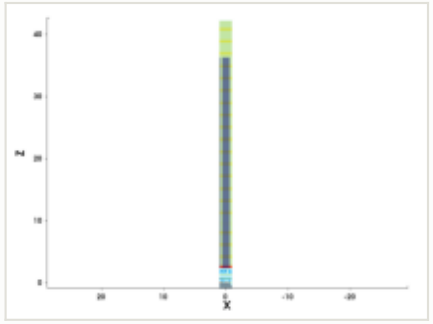

mask for this step

no mask for this step

steps by process area

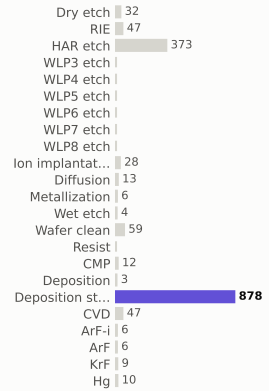

materials deposited (g)

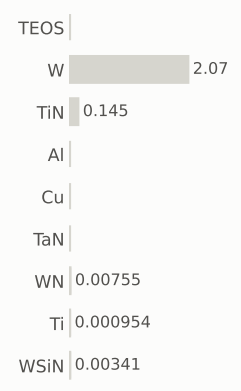

gases emitted (g)

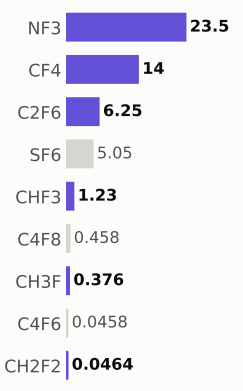

Step #20540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,151.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

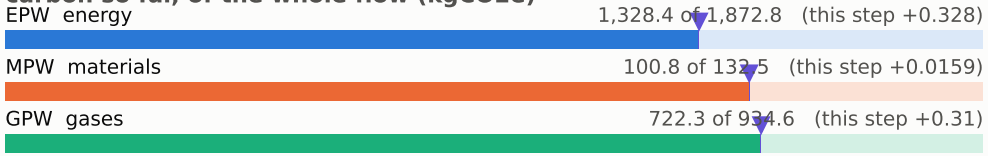

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

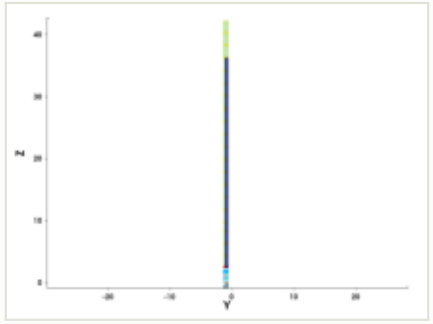

y cut at -1.035 µm

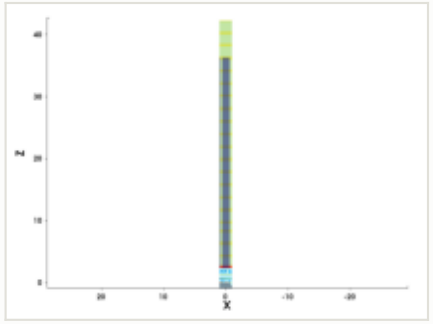

mask for this step

no mask for this step

steps by process area

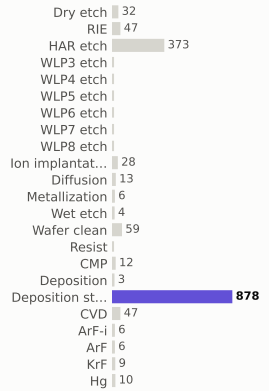

materials deposited (g)

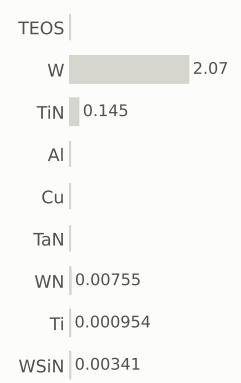

gases emitted (g)

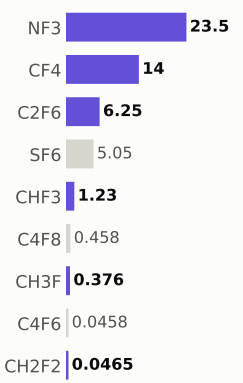

Step #20550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,152.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

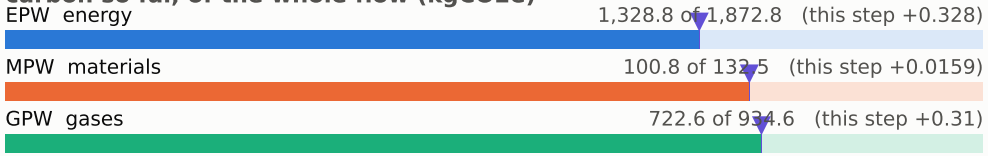

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

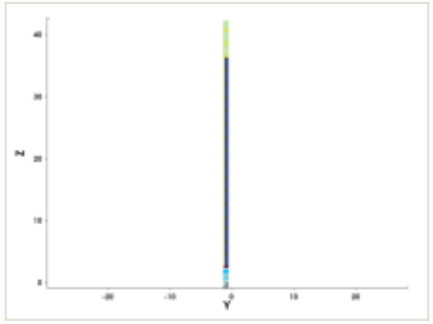

y cut at -1.035 µm

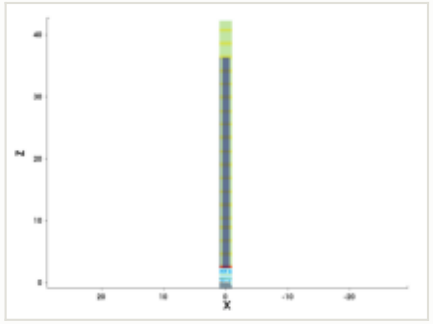

mask for this step

no mask for this step

steps by process area

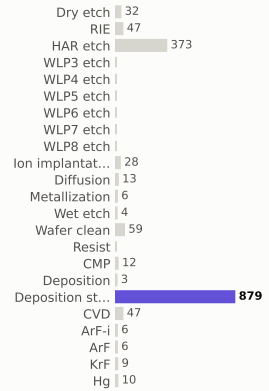

materials deposited (g)

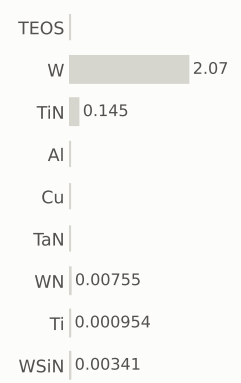

gases emitted (g)

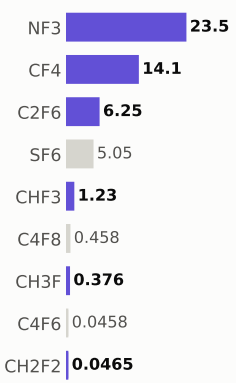

Step #20560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,152.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

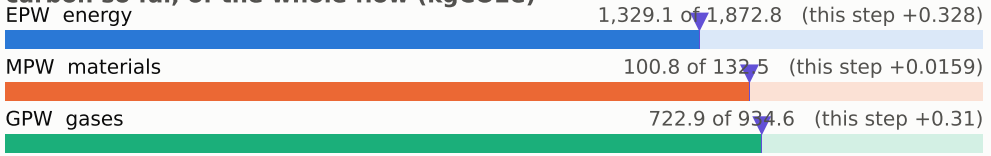

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

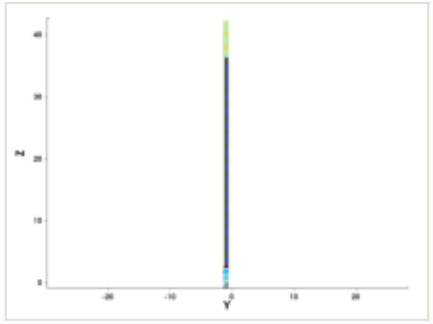

y cut at -1.035 µm

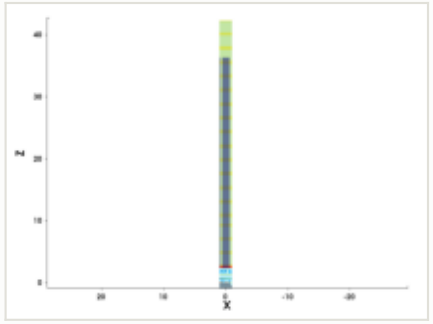

mask for this step

no mask for this step

steps by process area

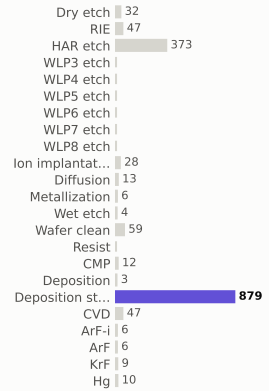

materials deposited (g)

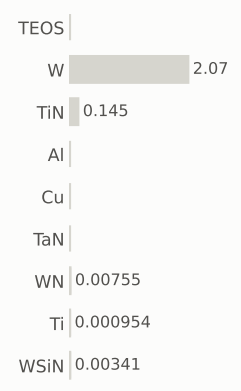

gases emitted (g)

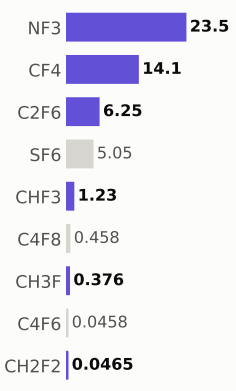

Step #20570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,153.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

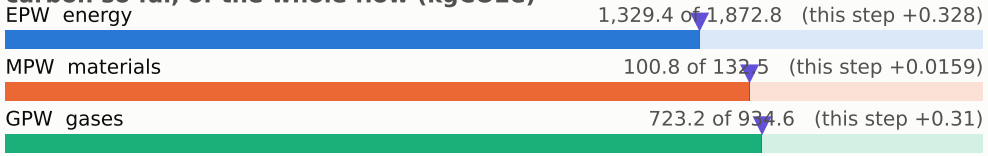

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

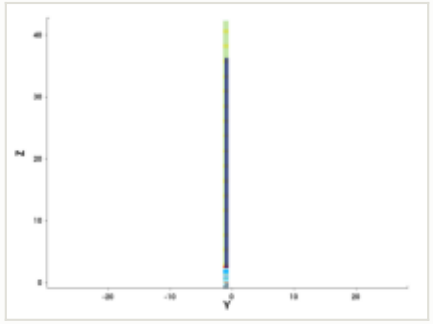

y cut at -1.035 µm

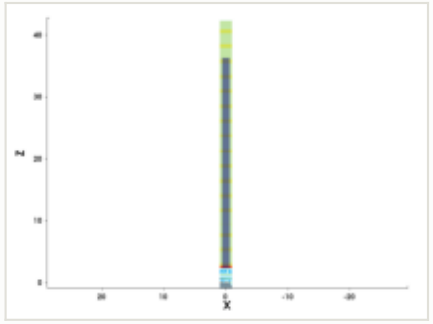

mask for this step

no mask for this step

steps by process area

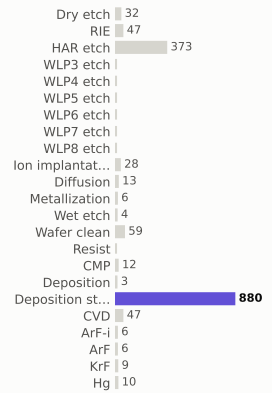

materials deposited (g)

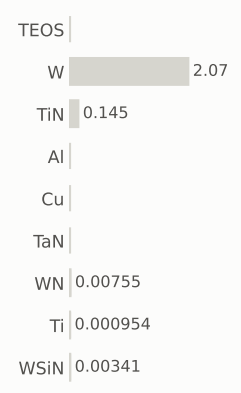

gases emitted (g)

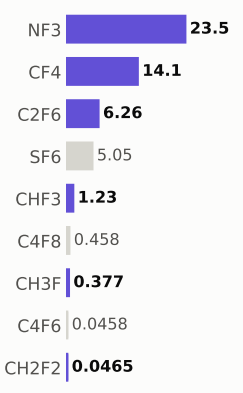

Step #20580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,154.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

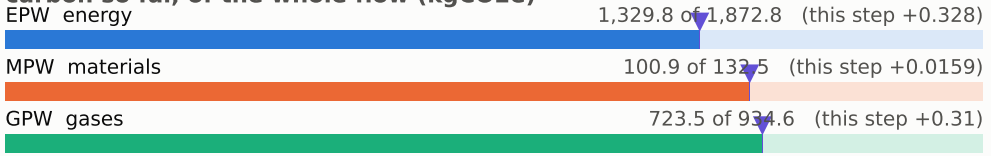

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

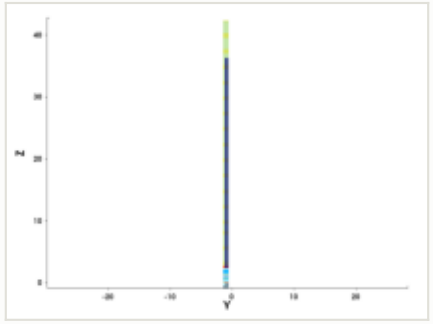

y cut at -1.035 µm

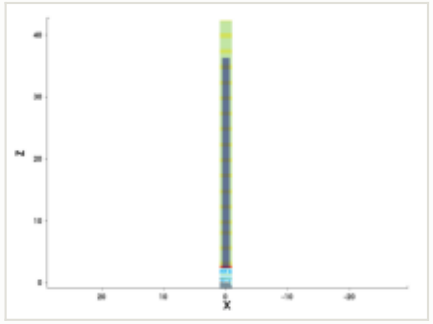

mask for this step

no mask for this step

steps by process area

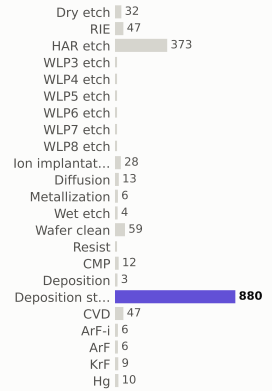

materials deposited (g)

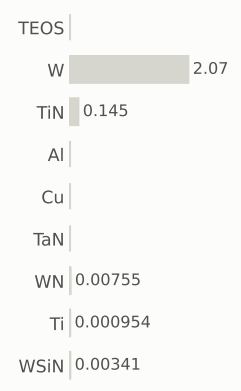

gases emitted (g)

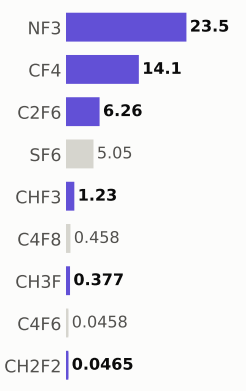

Step #20590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,154.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

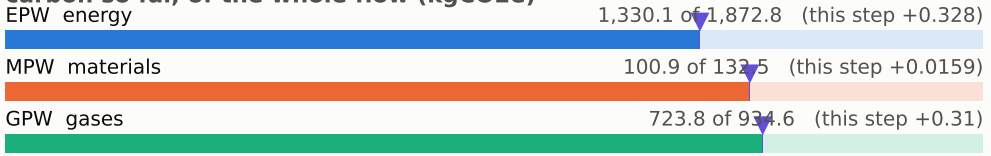

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

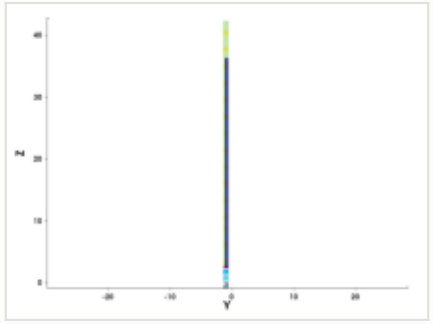

y cut at -1.035 µm

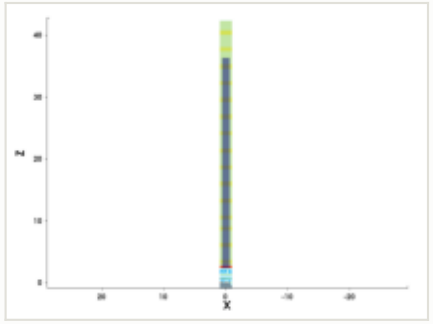

mask for this step

no mask for this step

steps by process area

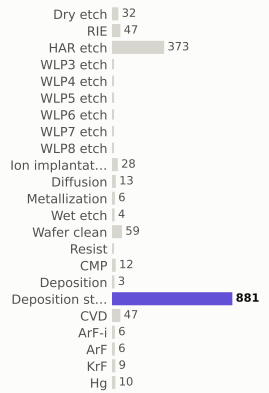

materials deposited (g)

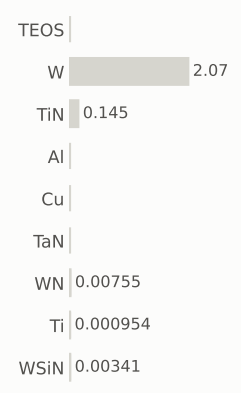

gases emitted (g)

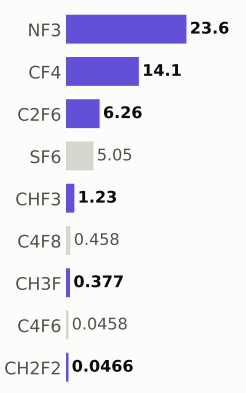

Step #20600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,155.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

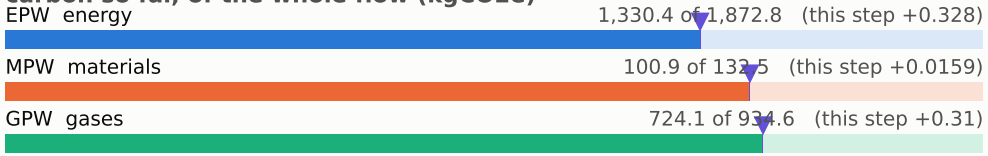

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

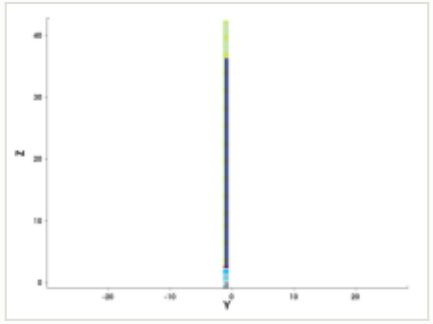

y cut at -1.035 µm

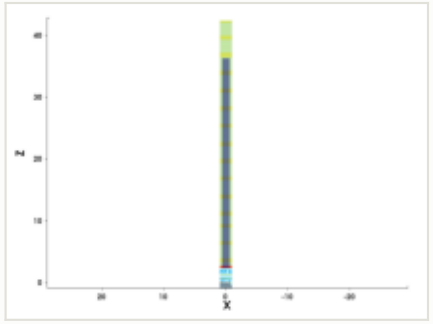

mask for this step

no mask for this step

steps by process area

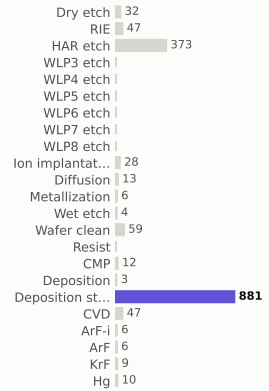

materials deposited (g)

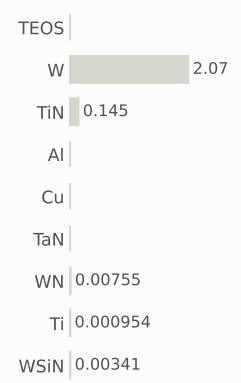

gases emitted (g)

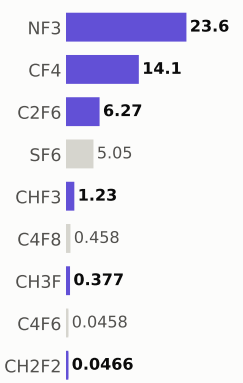

Step #20610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,156.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

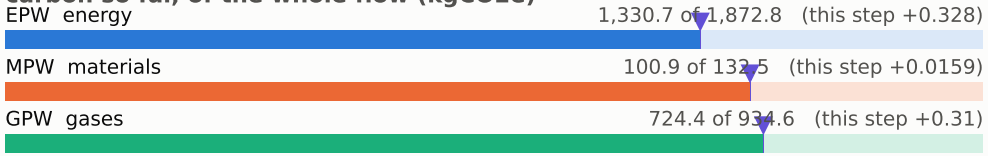

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

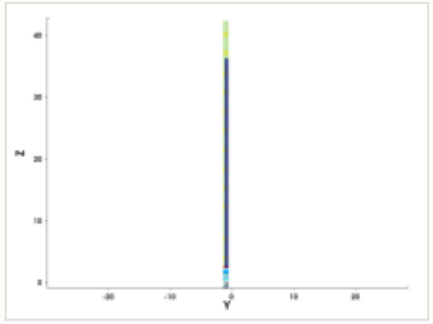

y cut at -1.035 µm

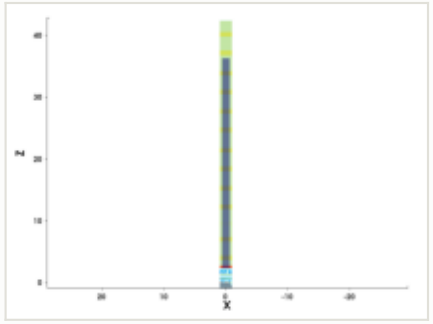

mask for this step

no mask for this step

steps by process area

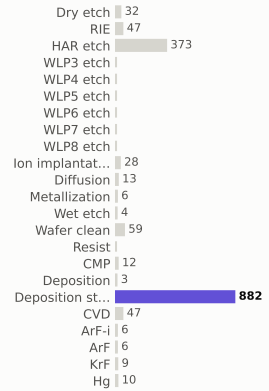

materials deposited (g)

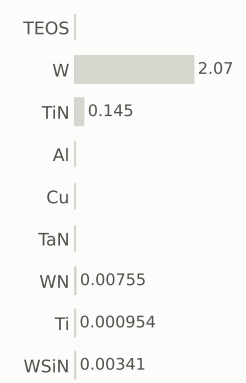

gases emitted (g)

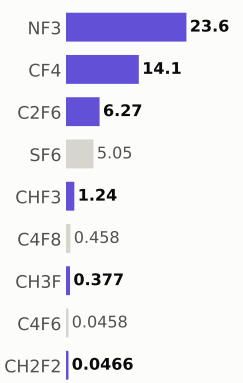

Step #20620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,156.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

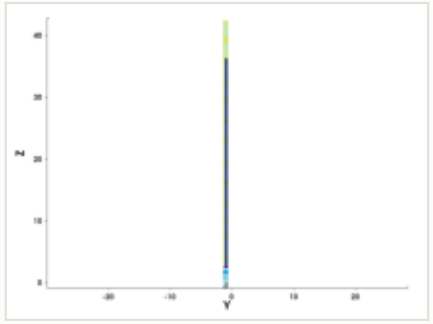

y cut at -1.035 µm

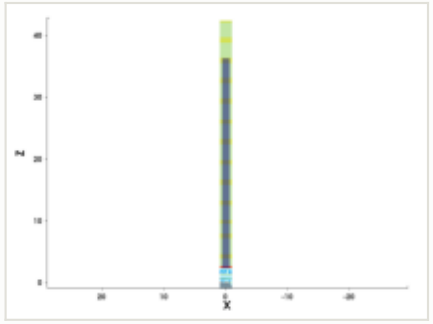

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

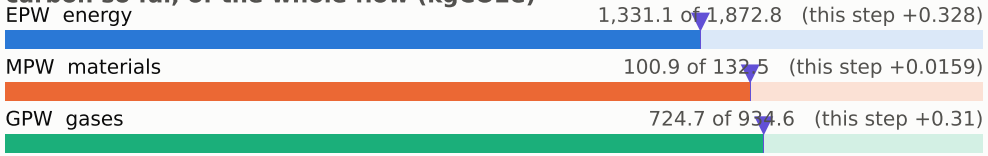

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

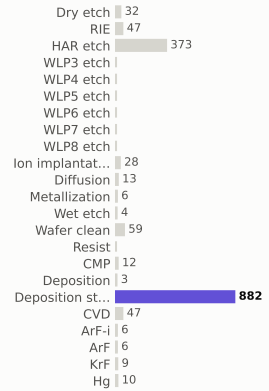

materials deposited (g)

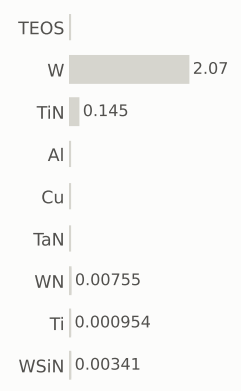

gases emitted (g)

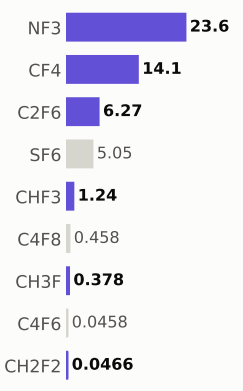

Step #20630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,157.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

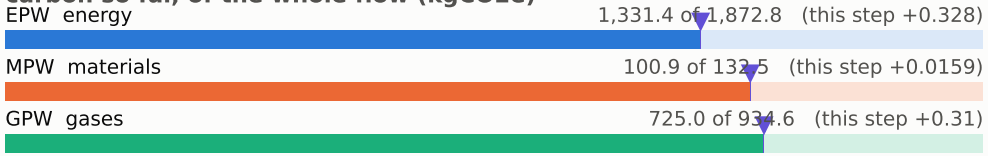

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

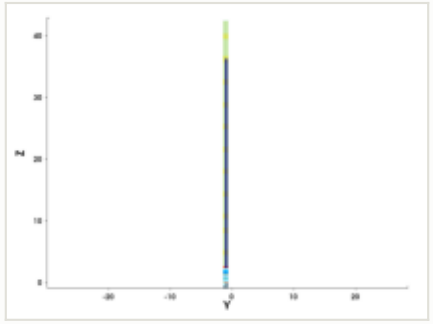

y cut at -1.035 µm

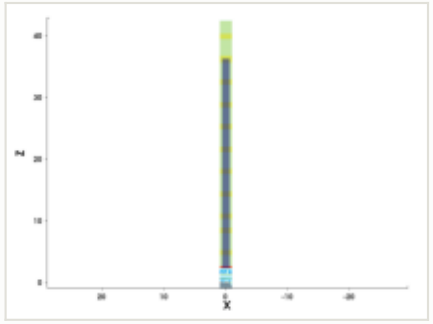

mask for this step

no mask for this step

steps by process area

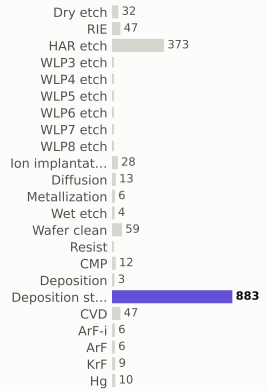

materials deposited (g)

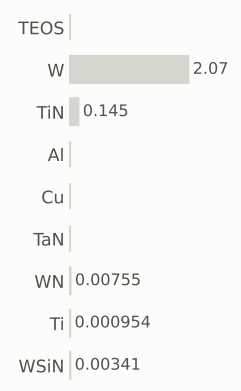

gases emitted (g)

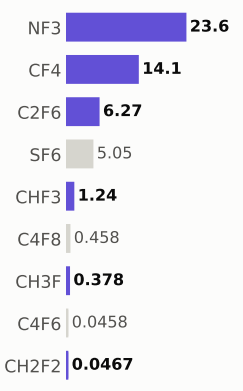

Step #20640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,158.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

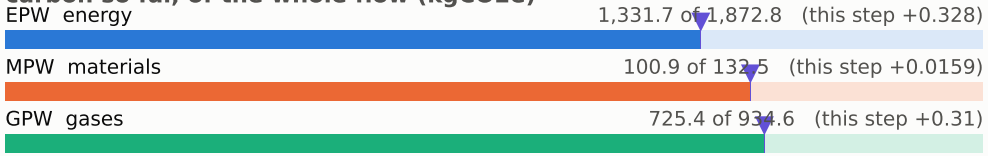

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

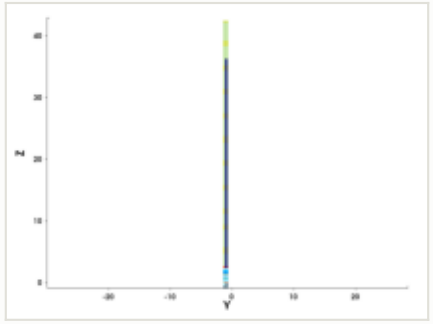

y cut at -1.035 µm

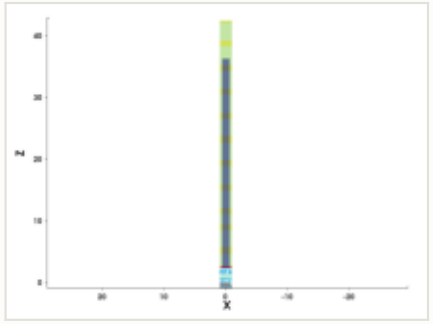

mask for this step

no mask for this step

steps by process area

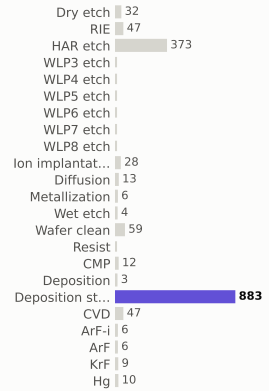

materials deposited (g)

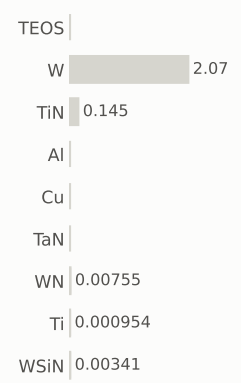

gases emitted (g)

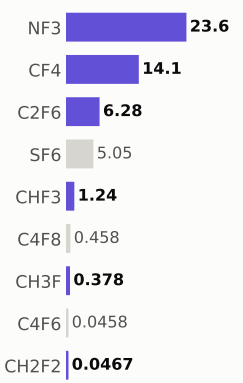

Step #20650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,158.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

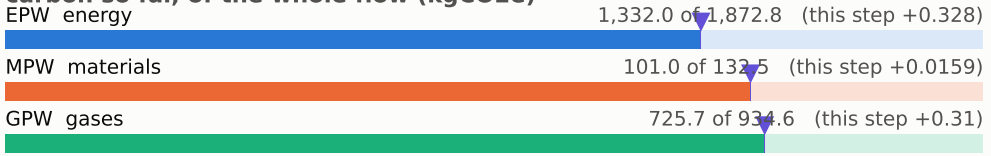

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

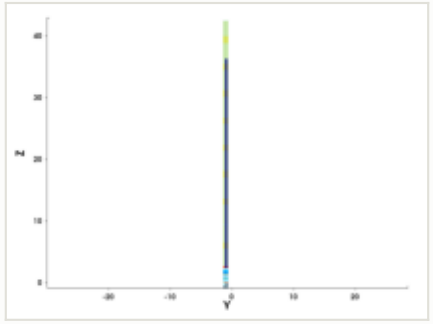

y cut at -1.035 µm

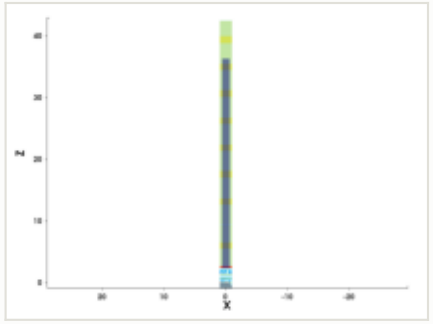

mask for this step

no mask for this step

steps by process area

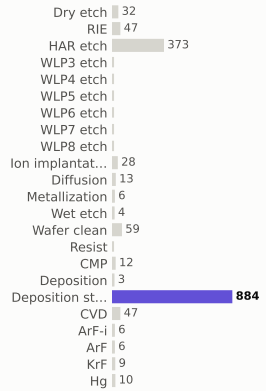

materials deposited (g)

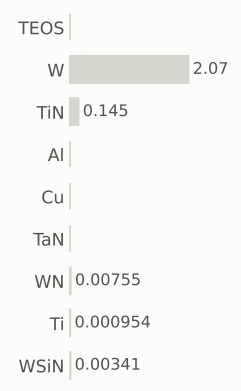

gases emitted (g)

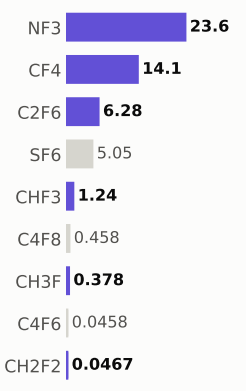

Step #20660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,159.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

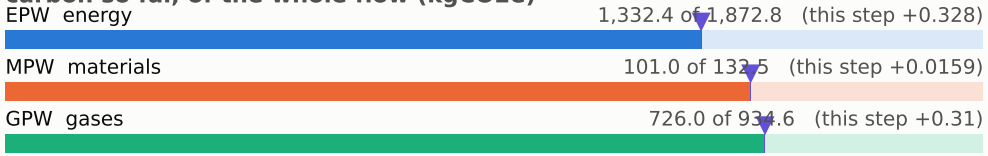

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

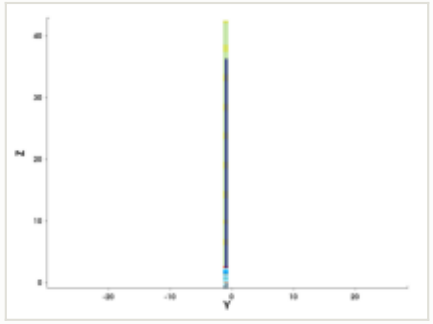

y cut at -1.035 µm

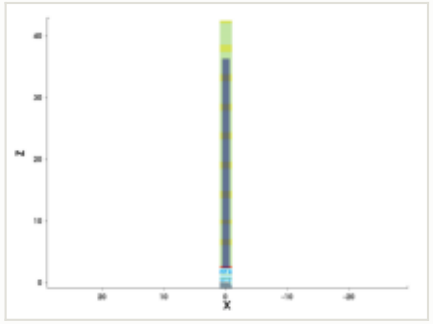

mask for this step

no mask for this step

steps by process area

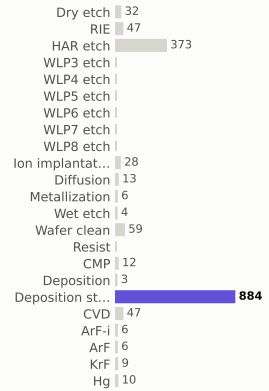

materials deposited (g)

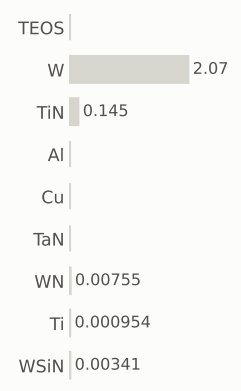

gases emitted (g)

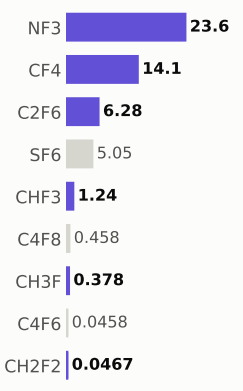

Step #20670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,160.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

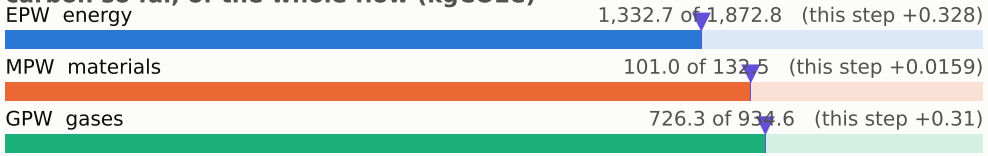

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

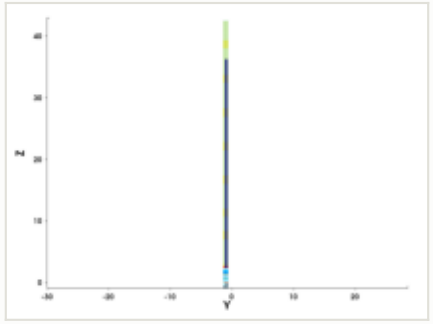

y cut at -1.035 µm

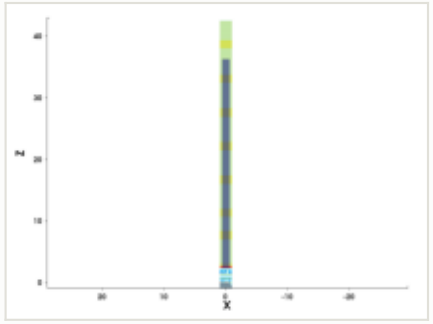

mask for this step

no mask for this step

steps by process area

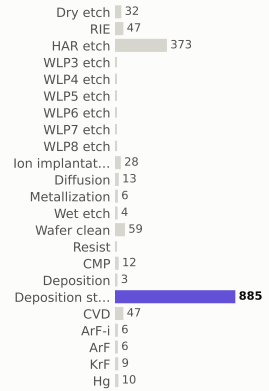

materials deposited (g)

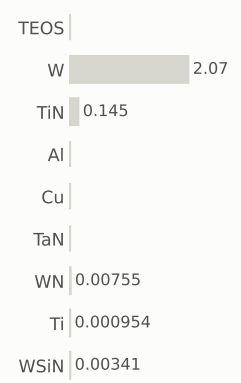

gases emitted (g)

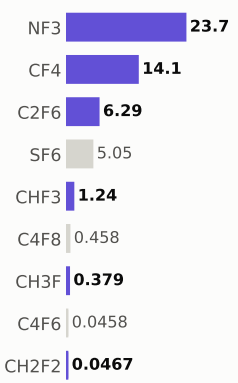

Step #20680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,160.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

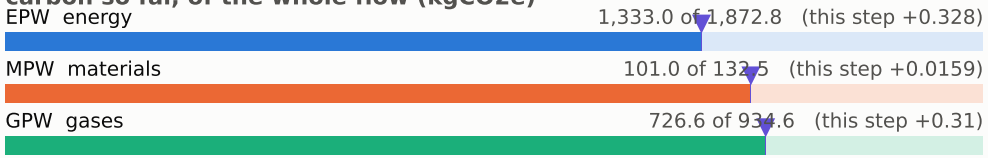

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

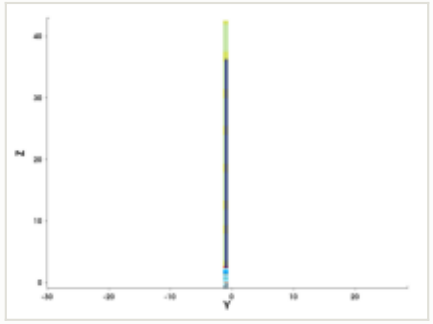

y cut at -1.035 µm

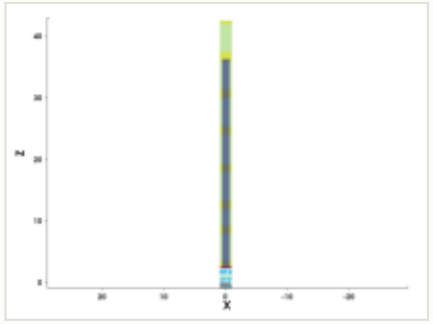

mask for this step

no mask for this step

steps by process area

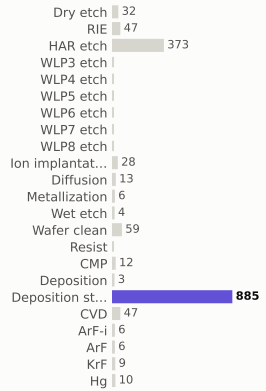

materials deposited (g)

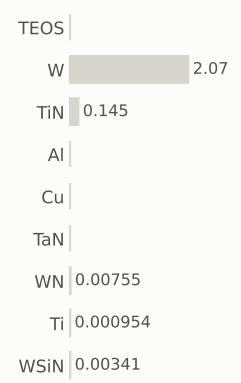

gases emitted (g)

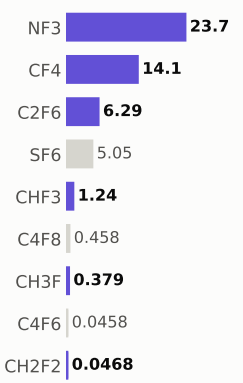

Step #20690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,161.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

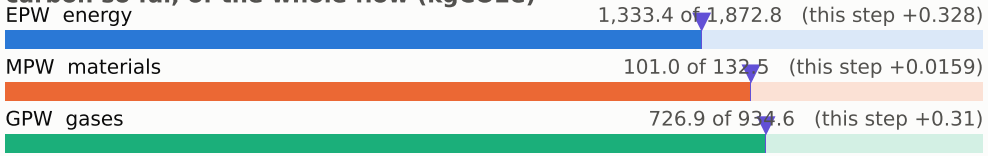

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

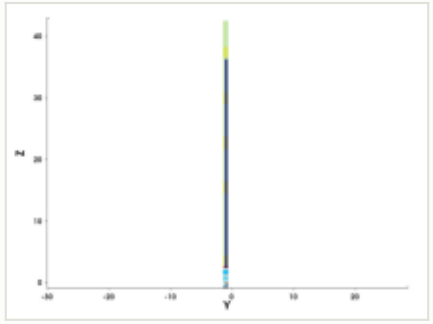

y cut at -1.035 µm

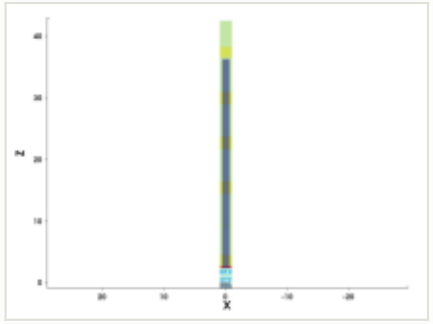

mask for this step

no mask for this step

steps by process area

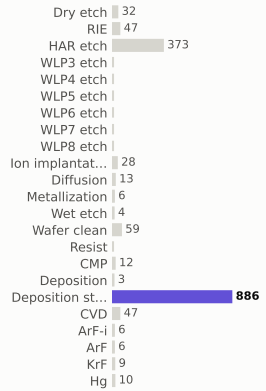

materials deposited (g)

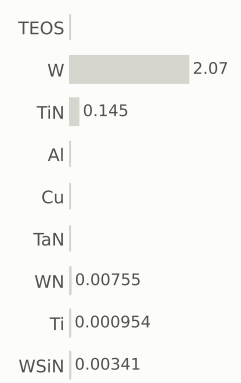

gases emitted (g)

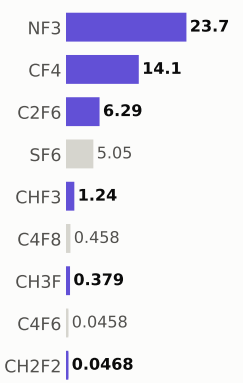

Step #20700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,161.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

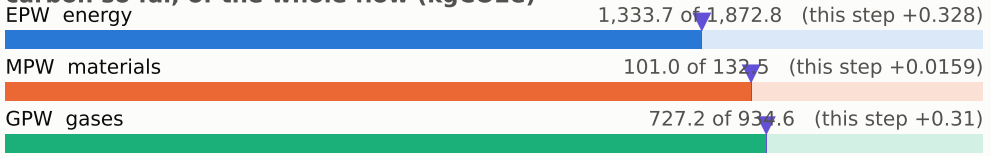

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

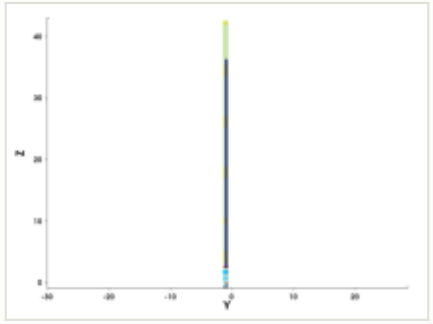

y cut at -1.035 µm

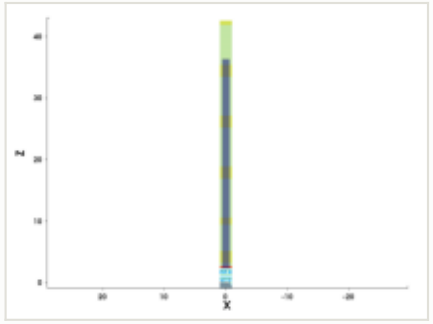

mask for this step

no mask for this step

steps by process area

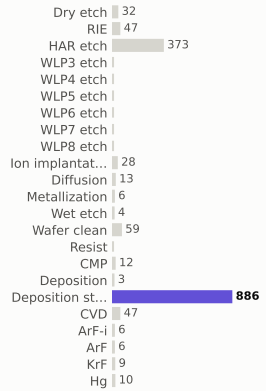

materials deposited (g)

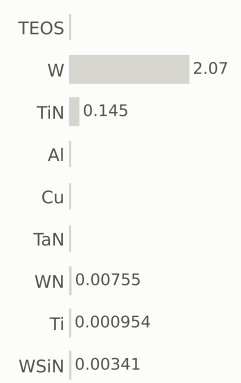

gases emitted (g)

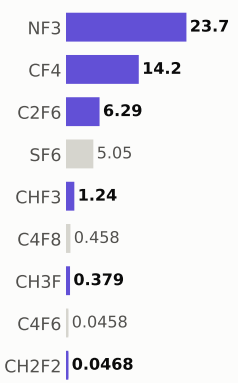

Step #20710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,162.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

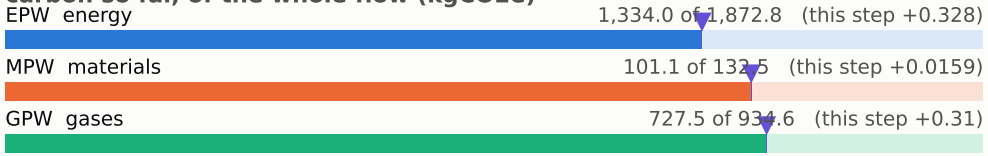

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

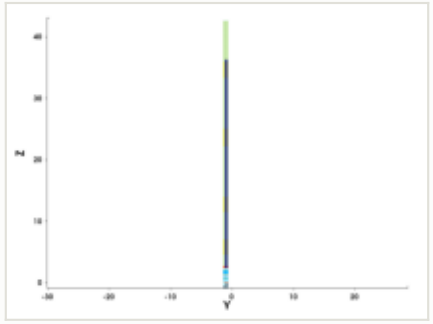

y cut at -1.035 µm

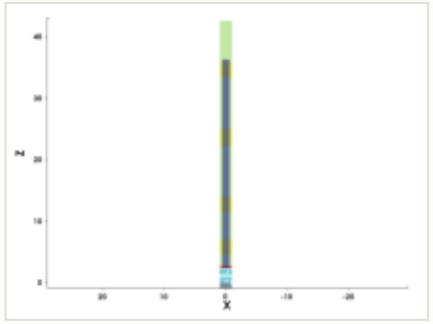

mask for this step

no mask for this step

steps by process area

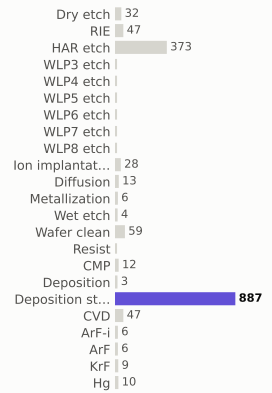

materials deposited (g)

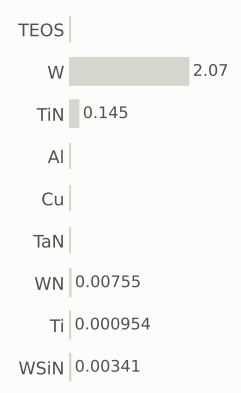

gases emitted (g)

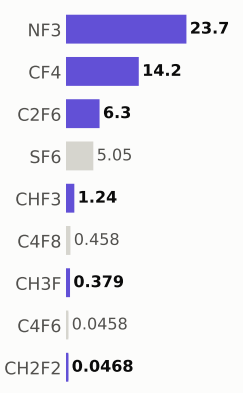

Step #20720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,163.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

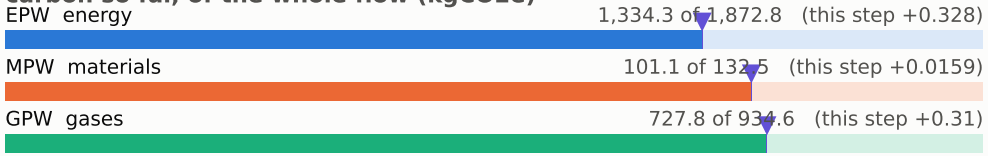

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

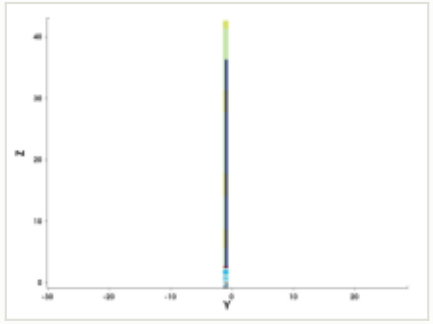

y cut at -1.035 µm

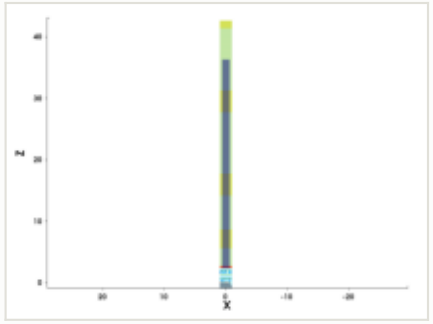

mask for this step

no mask for this step

steps by process area

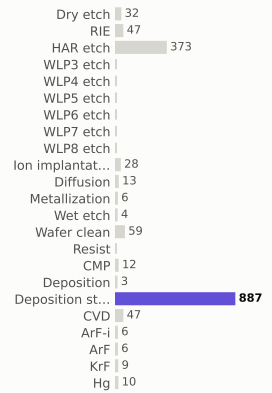

materials deposited (g)

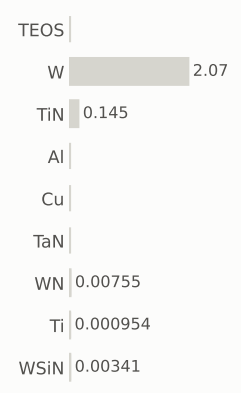

gases emitted (g)

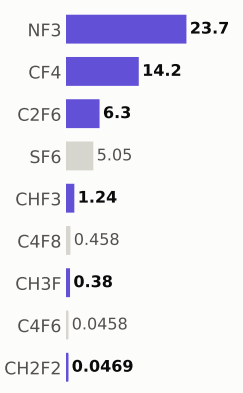

Step #20730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,163.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

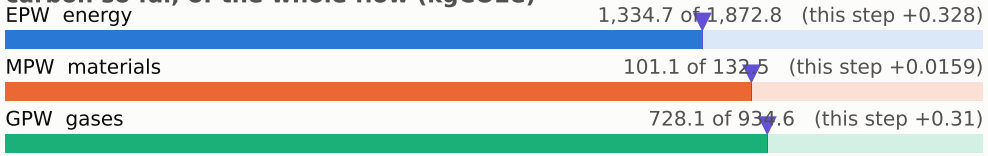

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

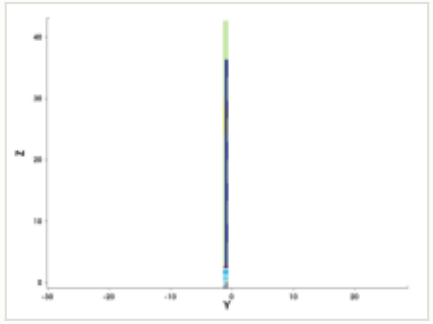

y cut at -1.035 µm

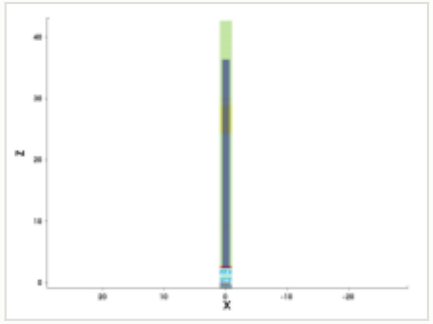

mask for this step

no mask for this step

steps by process area

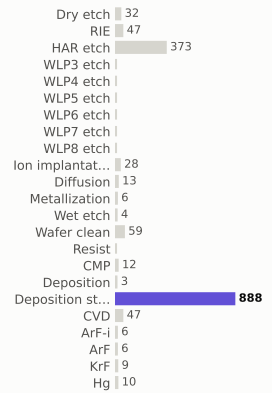

materials deposited (g)

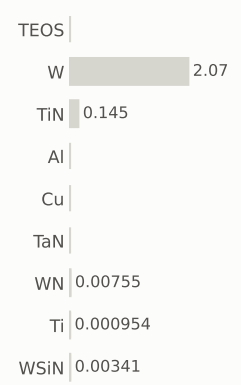

gases emitted (g)

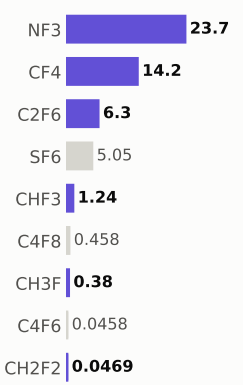

Step #20740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,164.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

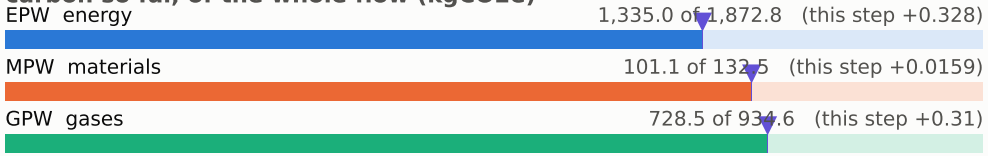

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

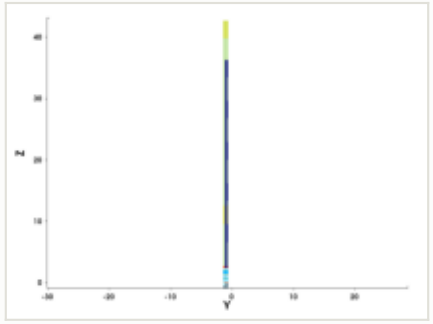

y cut at -1.035 µm

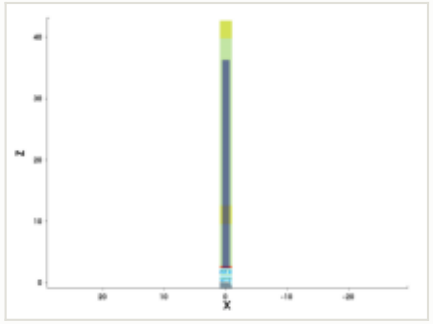

mask for this step

no mask for this step

steps by process area

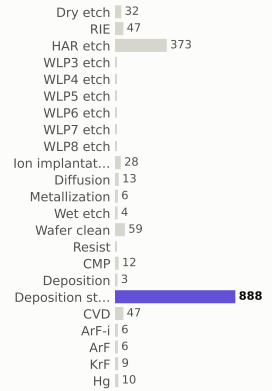

materials deposited (g)

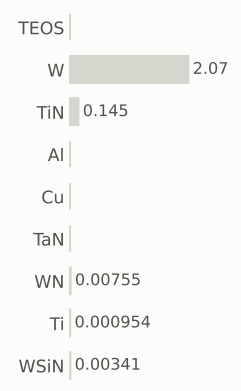

gases emitted (g)

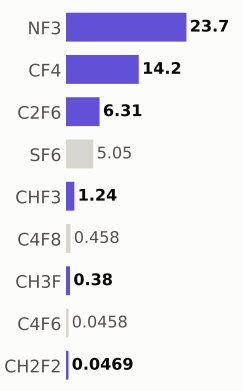

Step #20750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,165.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

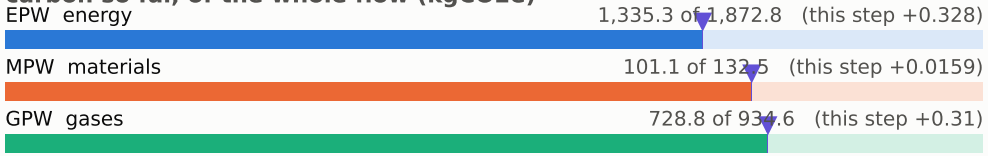

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

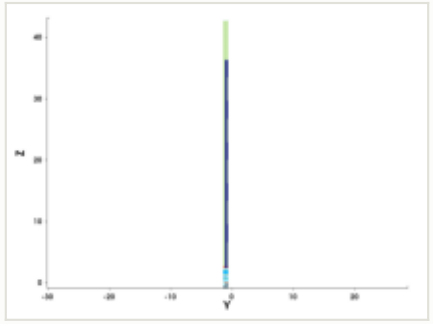

y cut at -1.035 µm

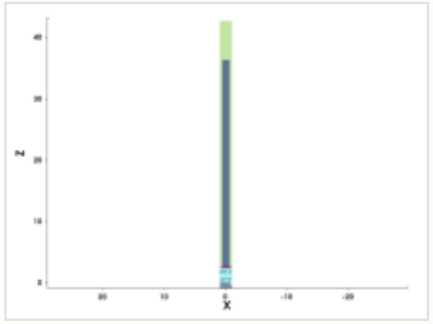

mask for this step

no mask for this step

steps by process area

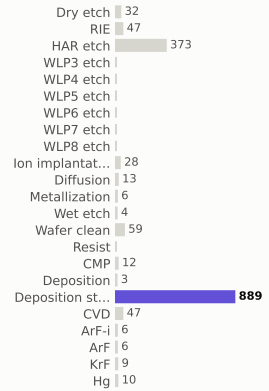

materials deposited (g)

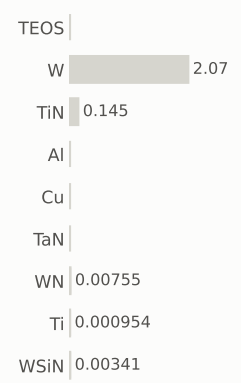

gases emitted (g)

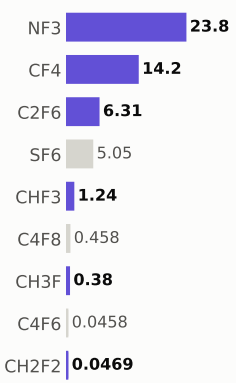

Step #20760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,165.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

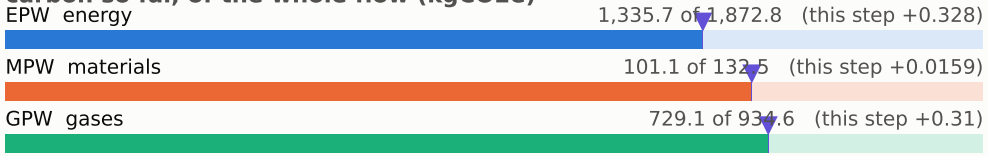

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

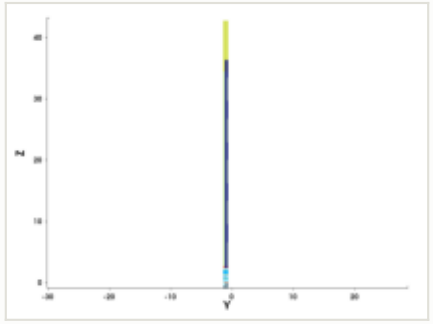

y cut at -1.035 µm

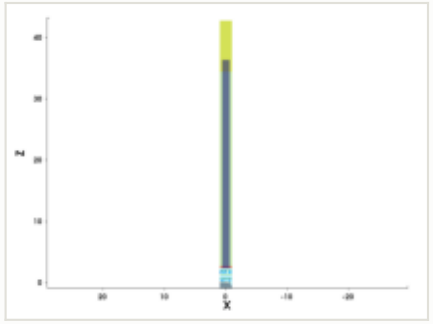

mask for this step

no mask for this step

steps by process area

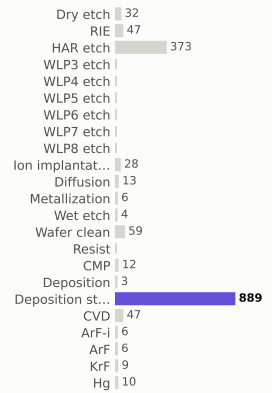

materials deposited (g)

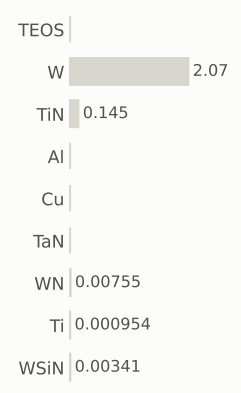

gases emitted (g)

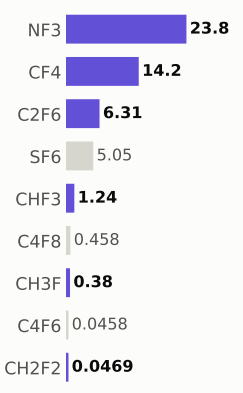

Step #20770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,166.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

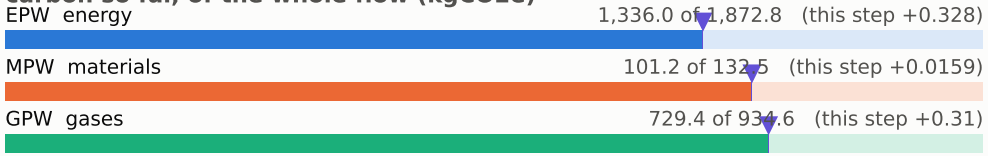

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

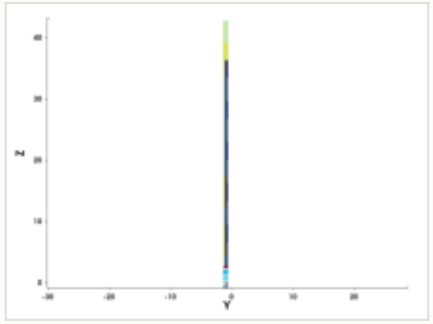

y cut at -1.035 µm

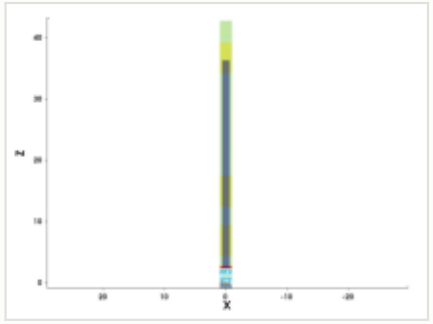

mask for this step

no mask for this step

steps by process area

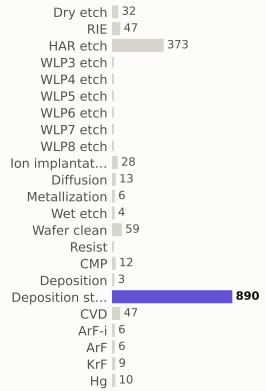

materials deposited (g)

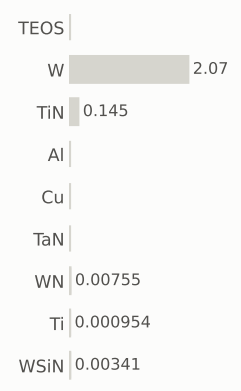

gases emitted (g)

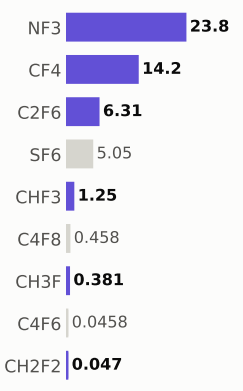

Step #20780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,167.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

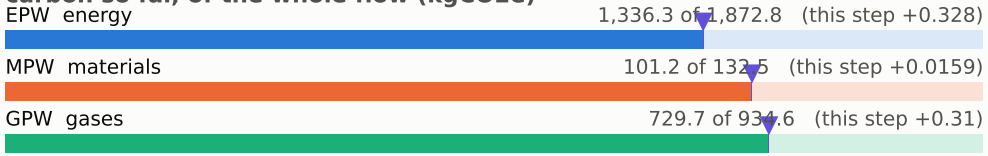

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

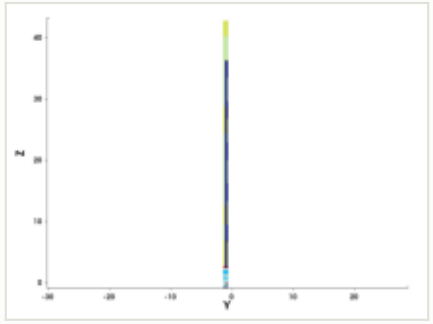

y cut at -1.035 µm

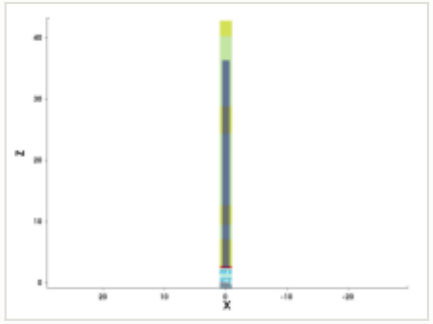

mask for this step

no mask for this step

steps by process area

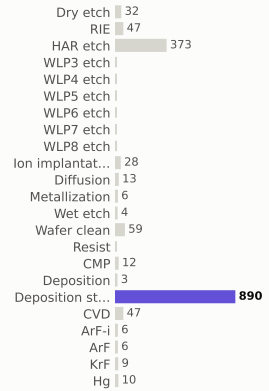

materials deposited (g)

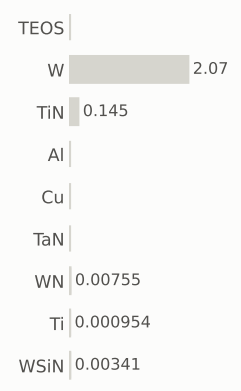

gases emitted (g)

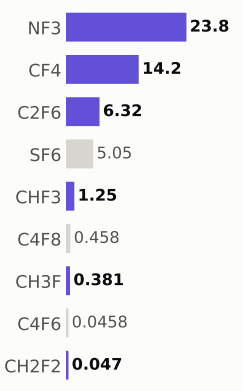

Step #20790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,167.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

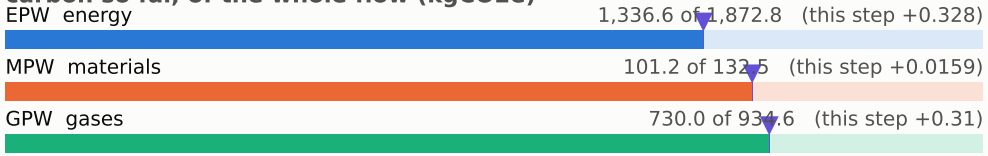

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

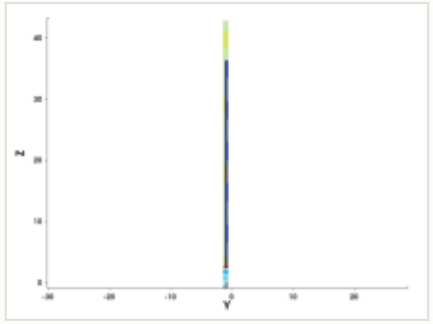

y cut at -1.035 µm

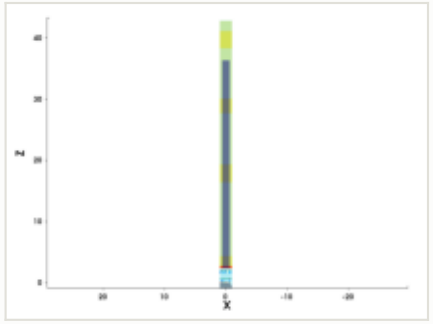

mask for this step

no mask for this step

steps by process area

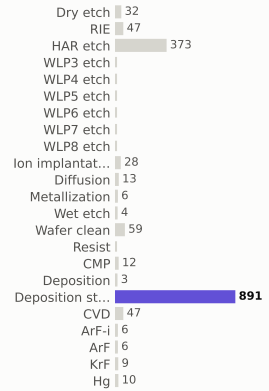

materials deposited (g)

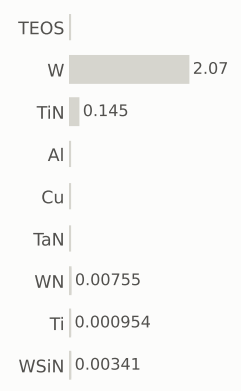

gases emitted (g)

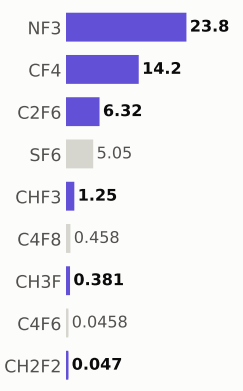

Step #20800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,168.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

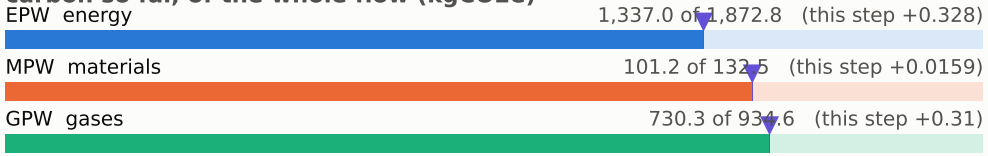

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

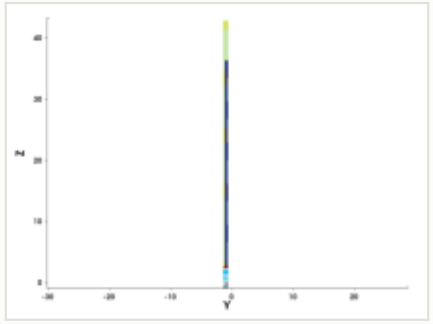

y cut at -1.035 µm

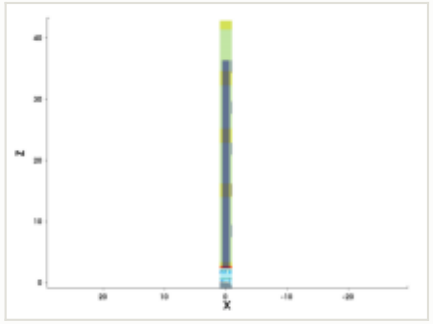

mask for this step

no mask for this step

steps by process area

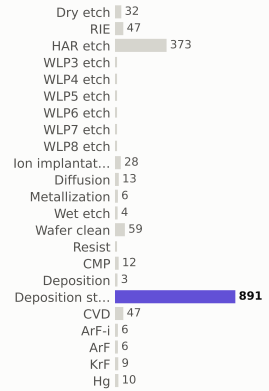

materials deposited (g)

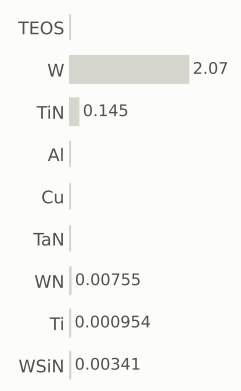

gases emitted (g)

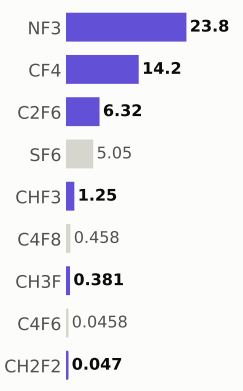

Step #20810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,169.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

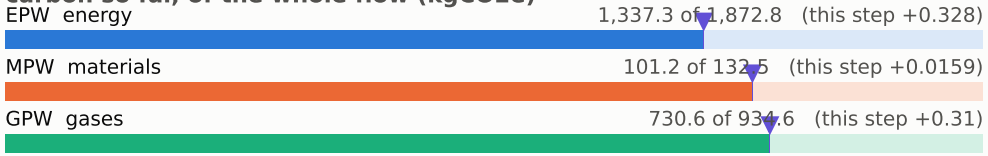

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

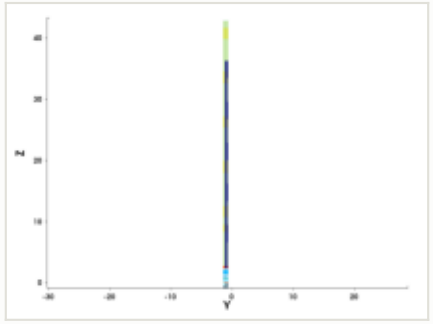

y cut at -1.035 µm

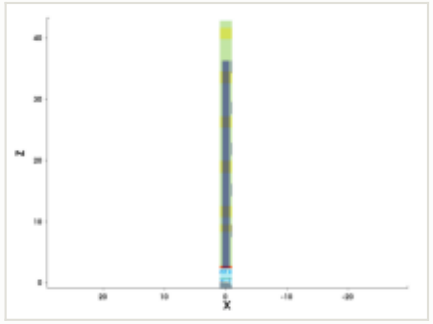

mask for this step

no mask for this step

steps by process area

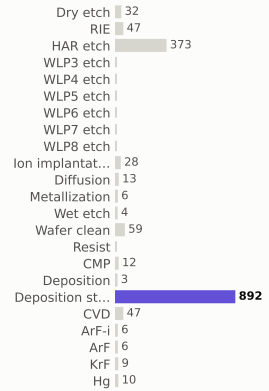

materials deposited (g)

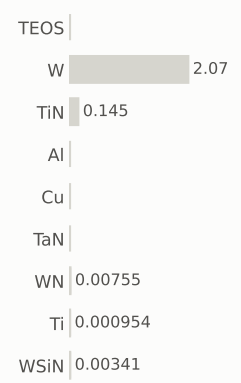

gases emitted (g)

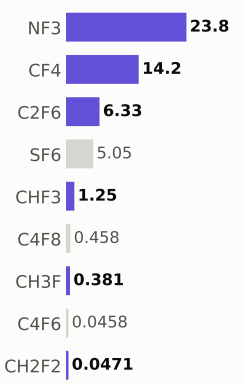

Step #20820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,169.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

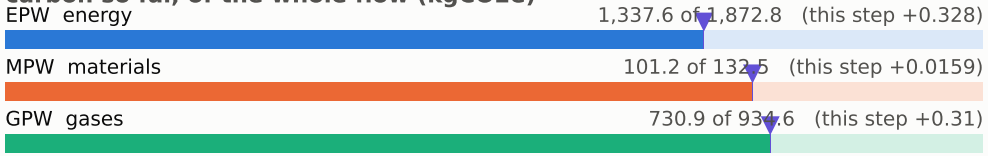

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

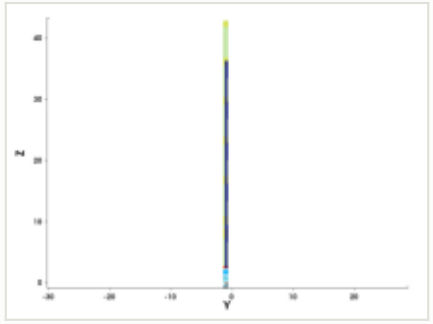

y cut at -1.035 µm

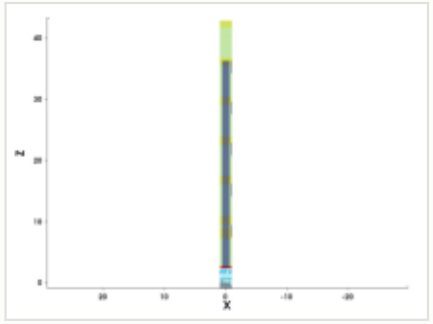

mask for this step

no mask for this step

steps by process area

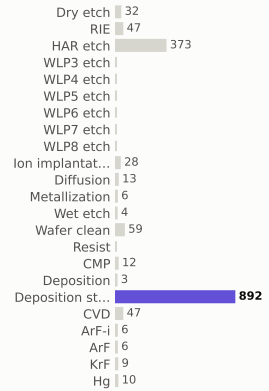

materials deposited (g)

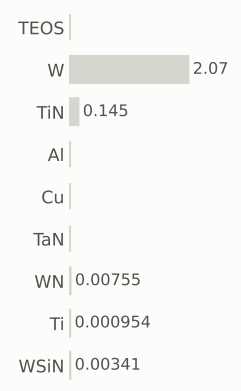

gases emitted (g)

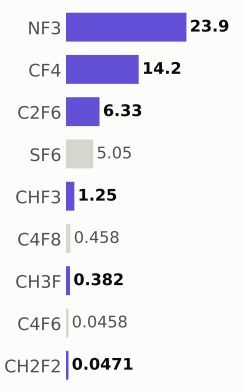

Step #20830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,170.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

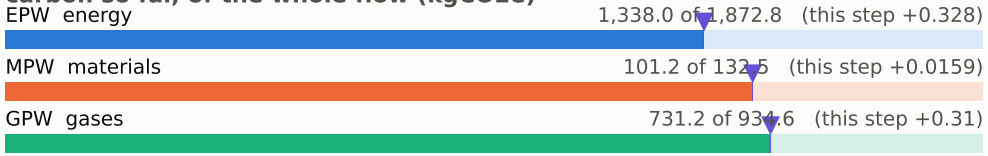

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

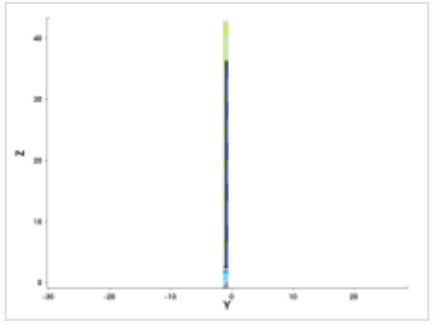

y cut at -1.035 µm

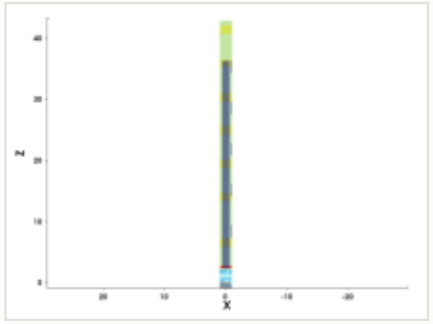

mask for this step

no mask for this step

steps by process area

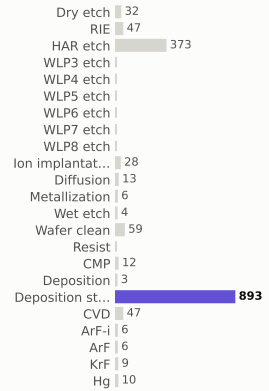

materials deposited (g)

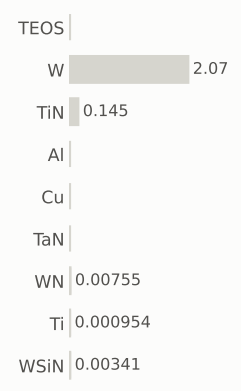

gases emitted (g)

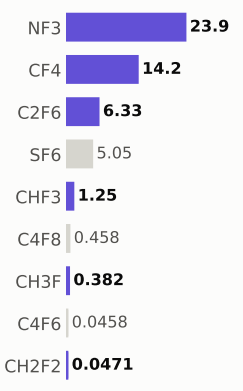

Step #20840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,171.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

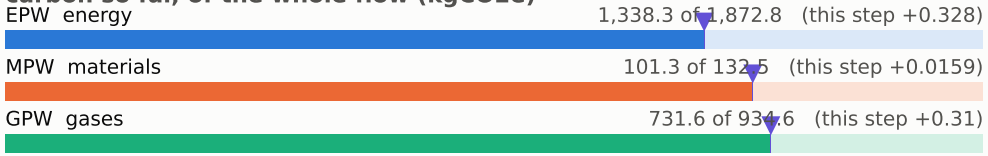

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

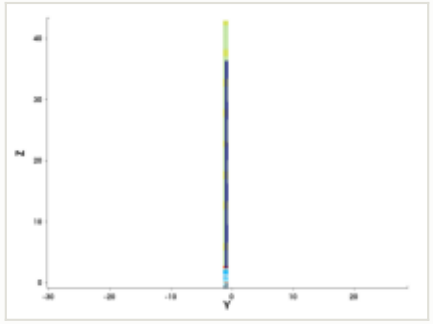

y cut at -1.035 µm

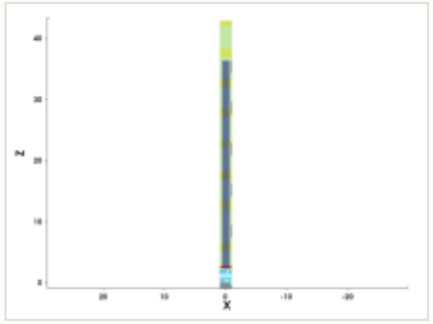

mask for this step

no mask for this step

steps by process area

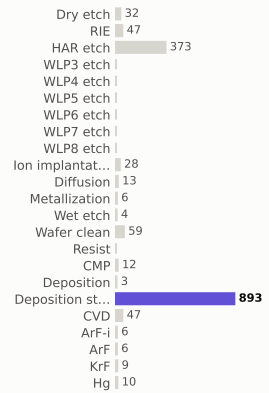

materials deposited (g)

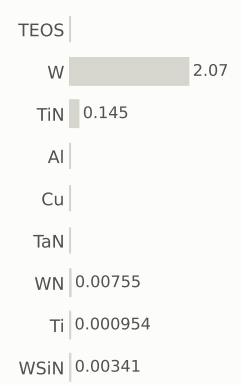

gases emitted (g)

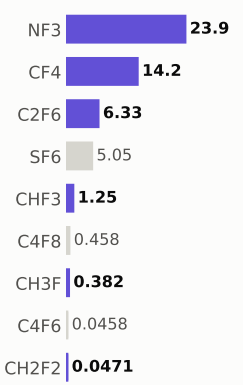

Step #20850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,171.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

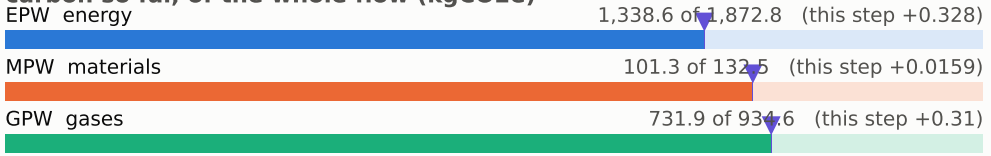

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

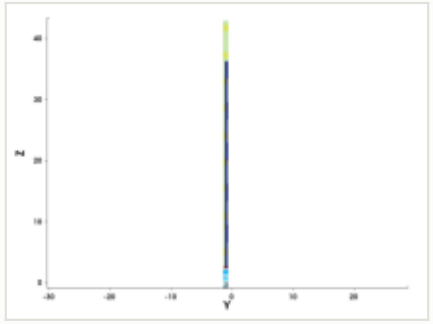

y cut at -1.035 µm

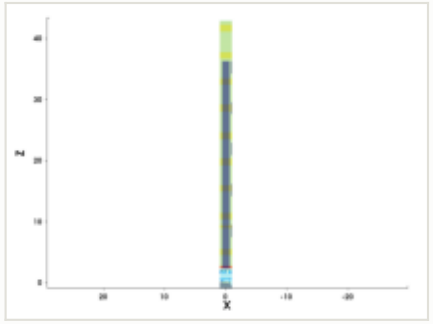

mask for this step

no mask for this step

steps by process area

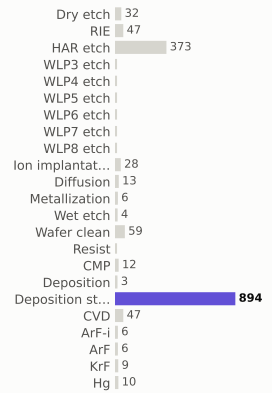

materials deposited (g)

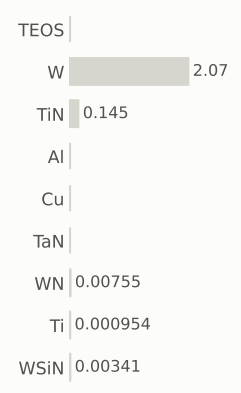

gases emitted (g)

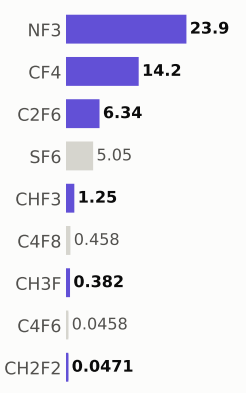

Step #20860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,172.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

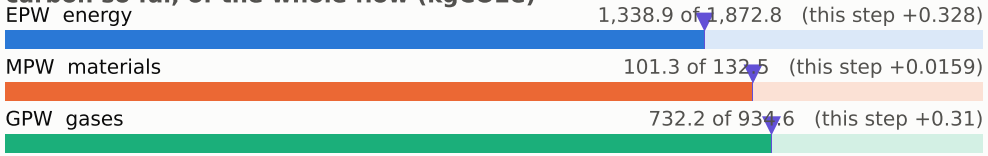

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

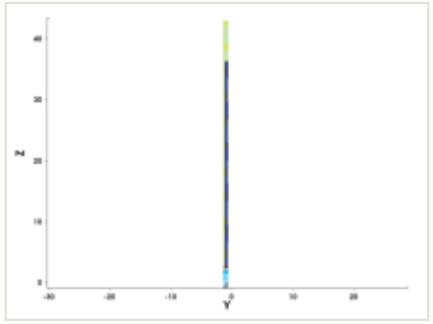

y cut at -1.035 µm

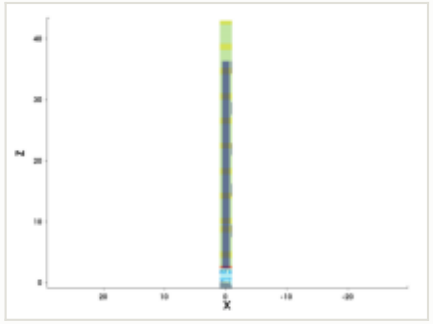

mask for this step

no mask for this step

steps by process area

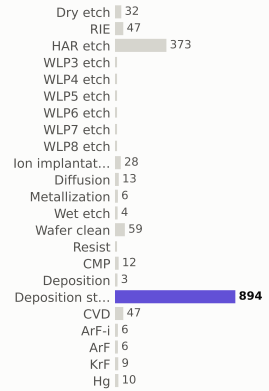

materials deposited (g)

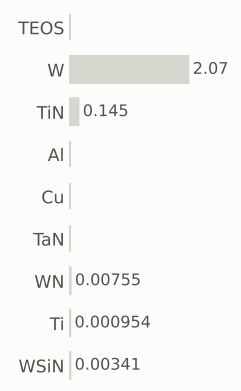

gases emitted (g)

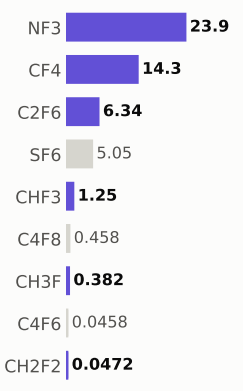

Step #20870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,173.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

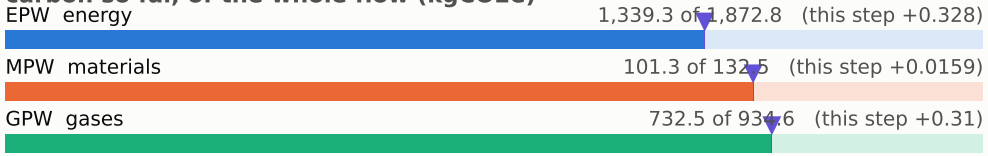

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

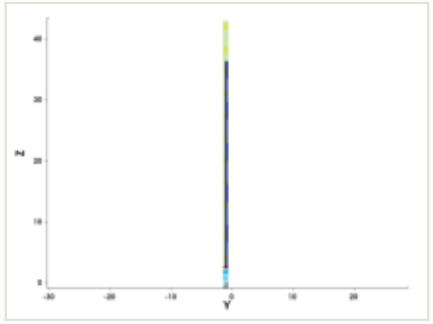

y cut at -1.035 µm

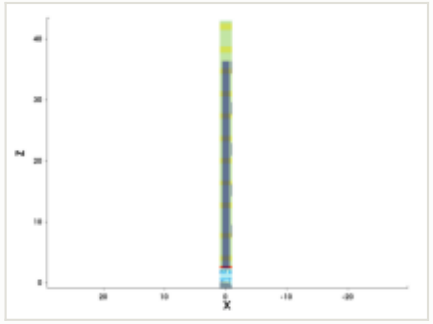

mask for this step

no mask for this step

steps by process area

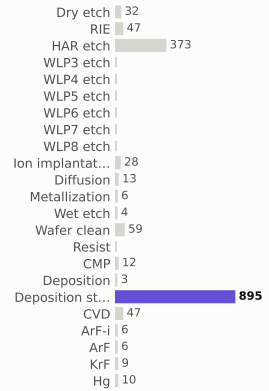

materials deposited (g)

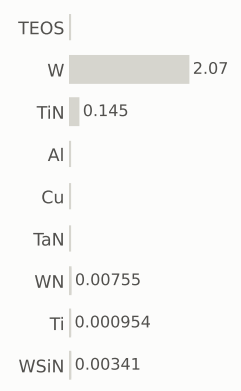

gases emitted (g)

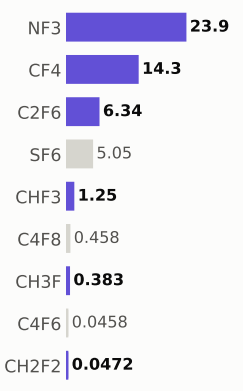

Step #20880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,173.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

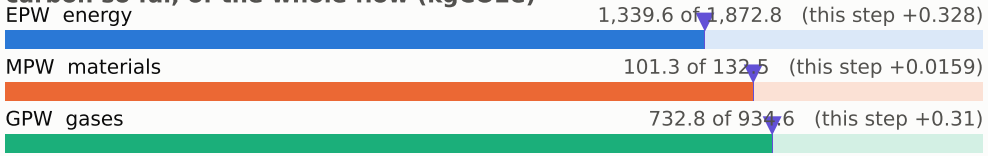

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

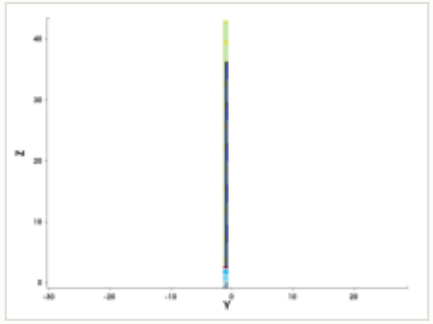

y cut at -1.035 µm

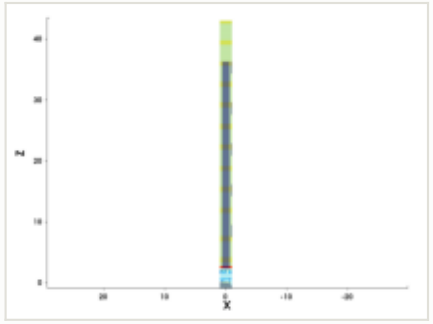

mask for this step

no mask for this step

steps by process area

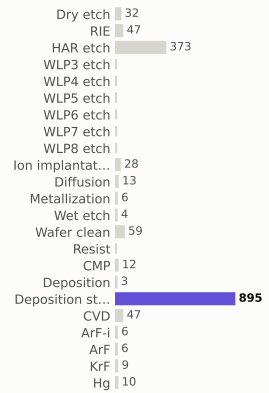

materials deposited (g)

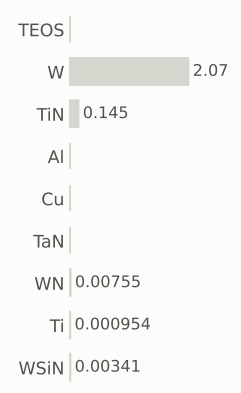

gases emitted (g)

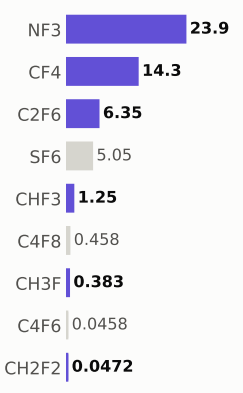

Step #20890: CVD

depo_isotropic · CVD

1.31	2,175.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

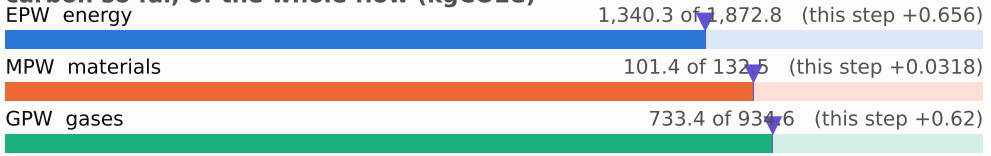

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

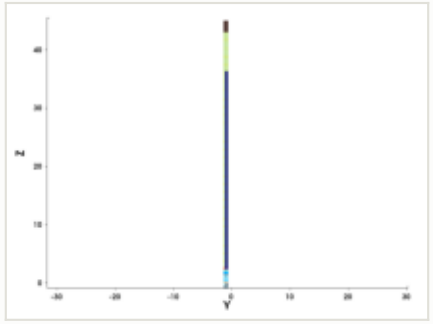

y cut at -1.035 µm

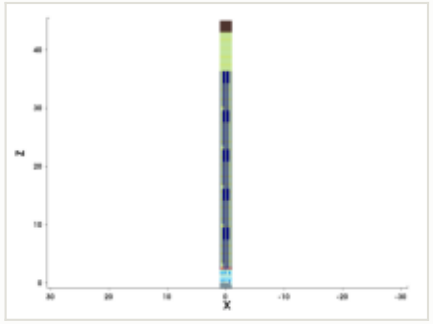

mask for this step

no mask for this step

steps by process area

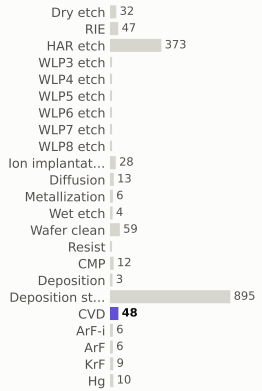

materials deposited (g)

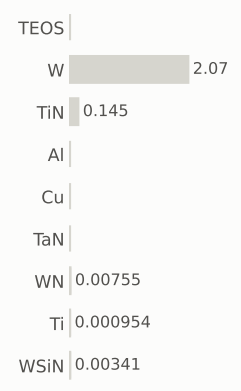

gases emitted (g)

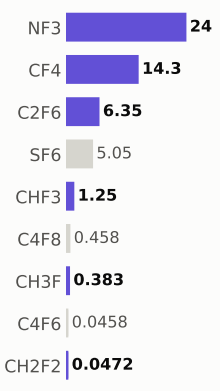

Step #20900: CVD

depo_isotropic · CVD

1.31	2,176.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

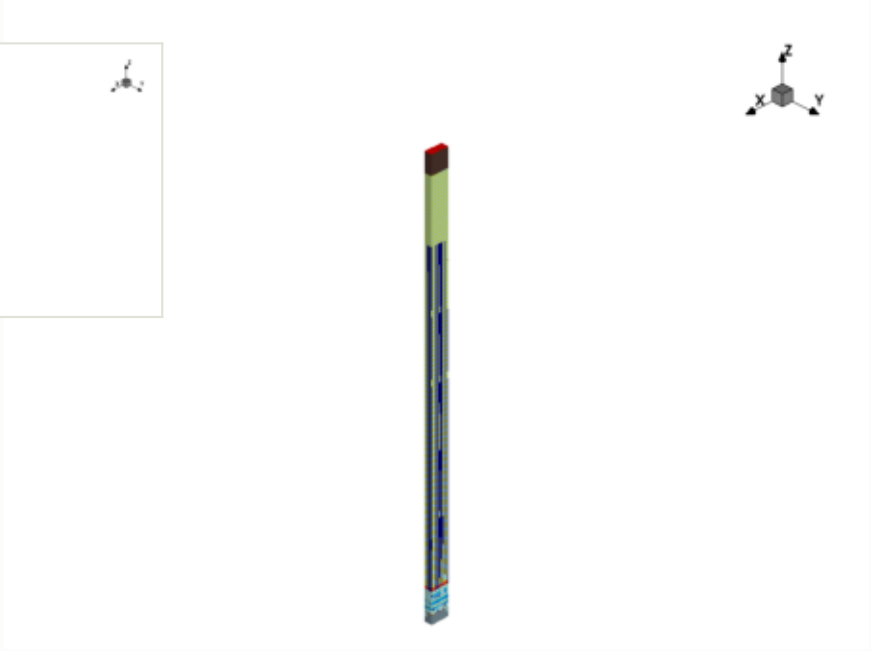

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

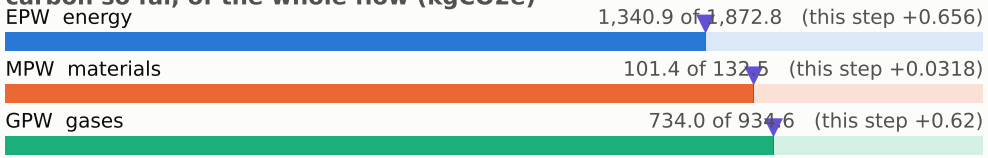

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

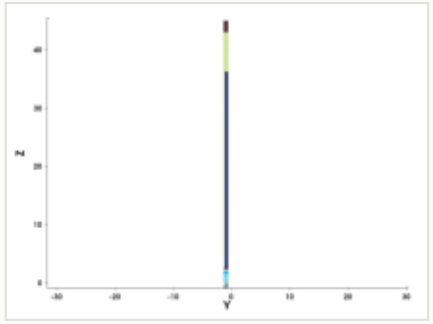

y cut at -1.035 µm

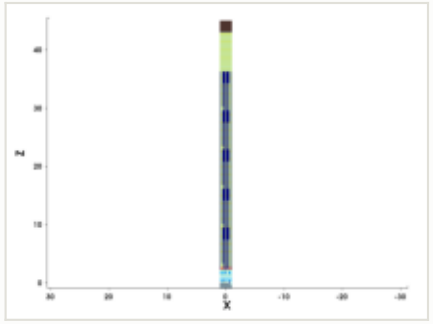

mask for this step

no mask for this step

steps by process area

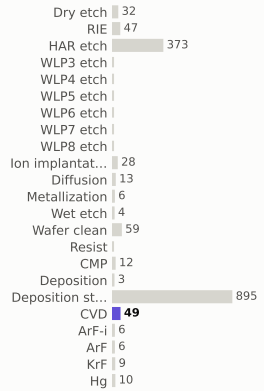

materials deposited (g)

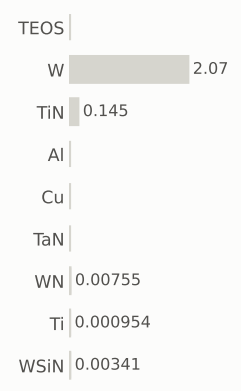

gases emitted (g)

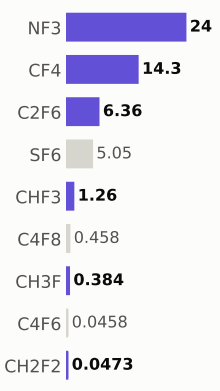

Step #20910: Wafer_clean

clean · Wafer_clean

0.169	2,176.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

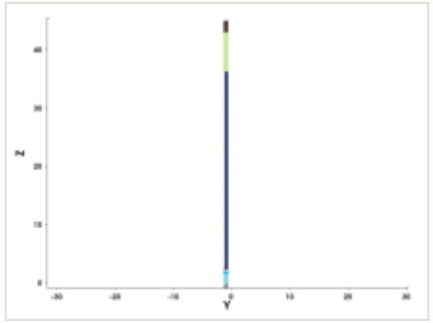

y cut at -1.035 µm

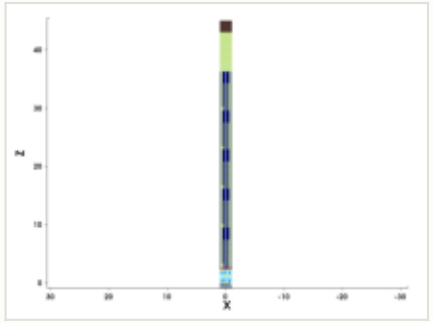

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

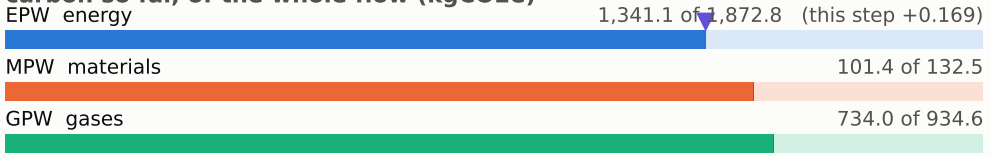

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

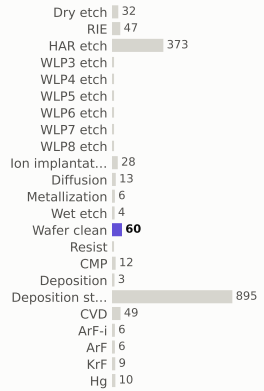

materials deposited (g)

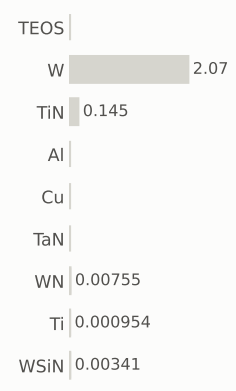

gases emitted (g)



Step #20920: ArF-i

litho_patterning · ArF-i

0.217	2,176.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

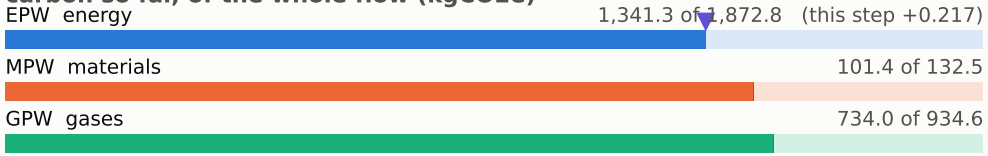

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

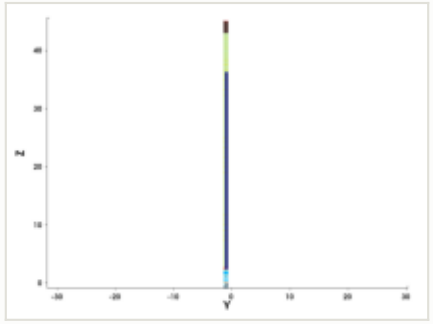

y cut at -1.035 µm

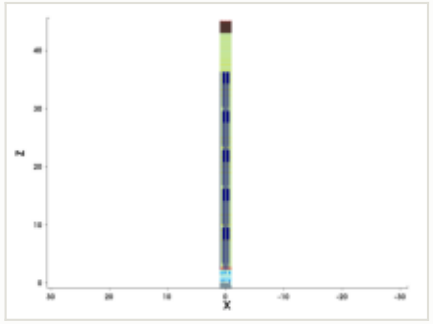

mask: layer 27:0 (OASIS)

steps by process area

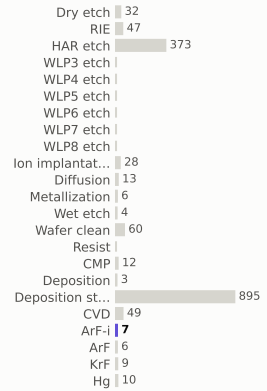

materials deposited (g)

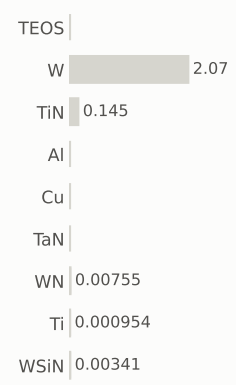

gases emitted (g)



Step #20930: RIE

etch_anisotropic · RIE

1.04	2,177.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

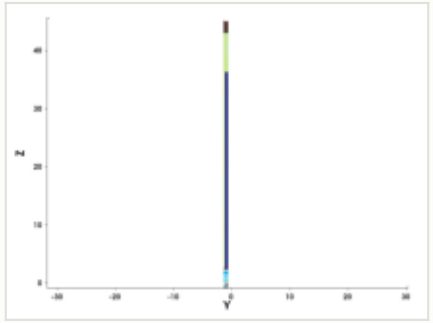

y cut at -1.035 µm

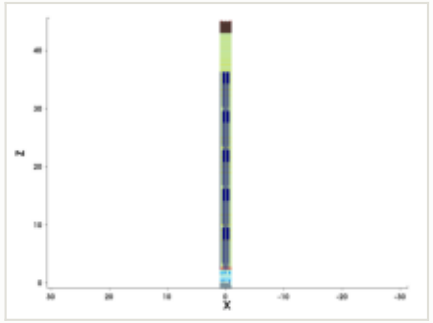

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

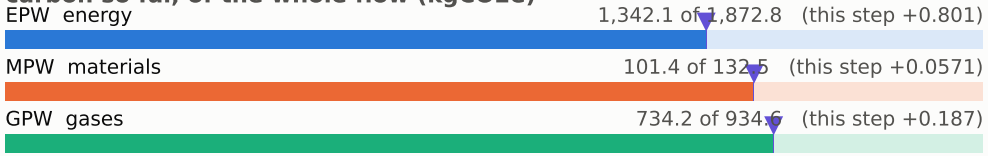

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

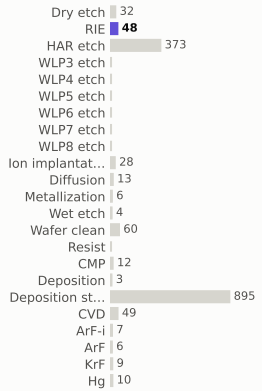

materials deposited (g)

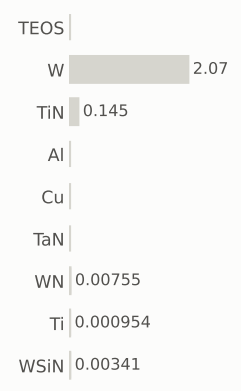

gases emitted (g)

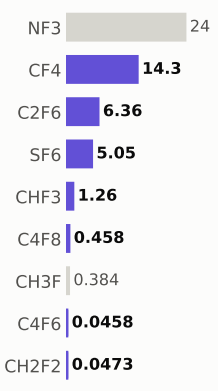

Step #20940: RIE

etch_anisotropic · RIE

1.04	2,178.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

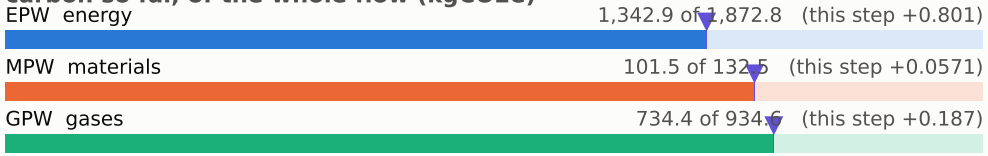

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

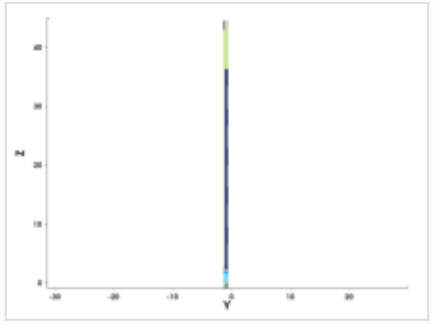

y cut at -1.035 µm

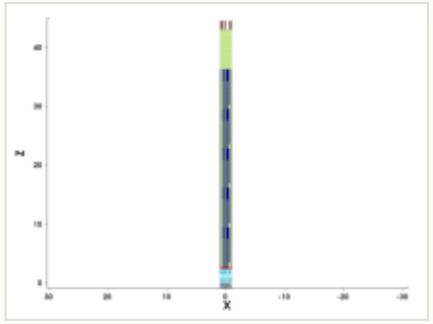

mask for this step

no mask for this step

steps by process area

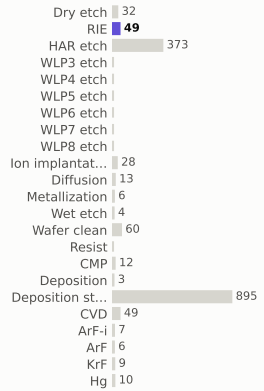

materials deposited (g)

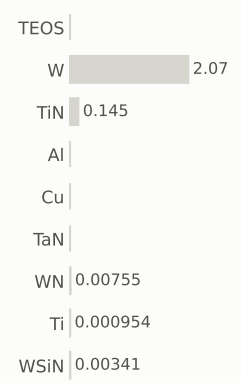

gases emitted (g)



Step #20950: HAR_etch

etch_anisotropic · HAR_etch

1.04	2,179.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

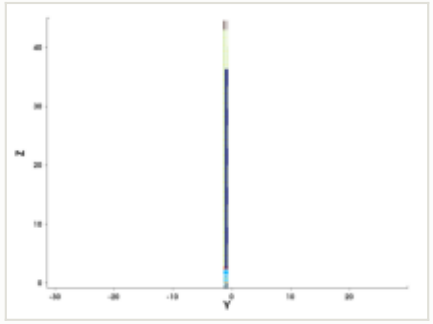

y cut at -1.035 µm

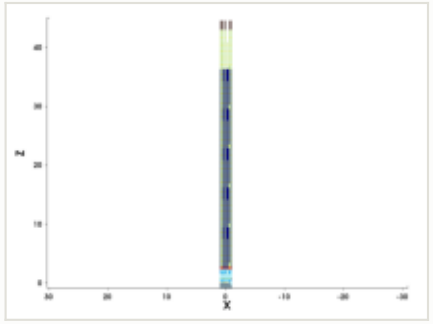

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

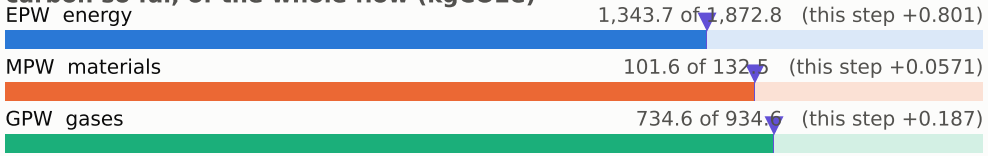

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

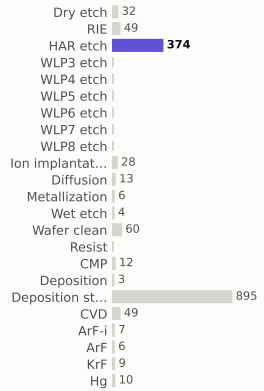

materials deposited (g)

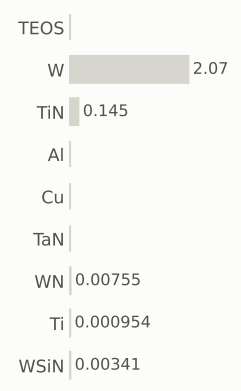

gases emitted (g)



Step #20950.0671: HAR_etch

etch_noop · HAR_etch

1.04	2,180.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

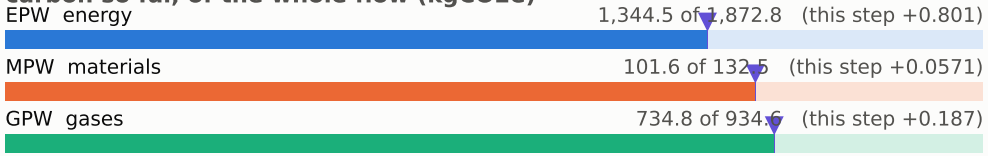

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

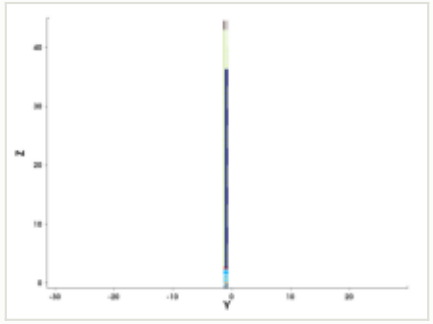

y cut at -1.035 µm

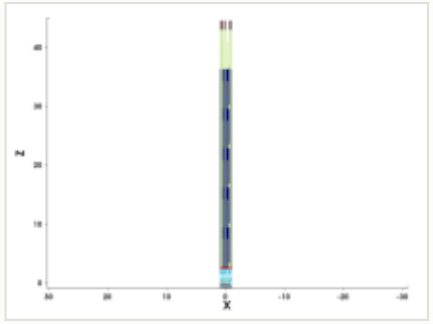

mask for this step

no mask for this step

steps by process area

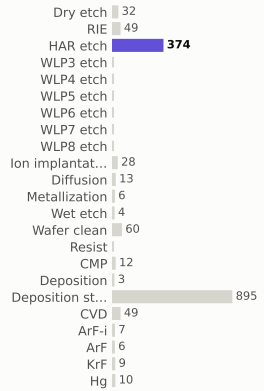

materials deposited (g)

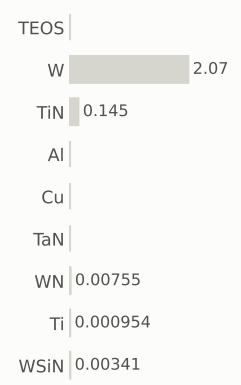

gases emitted (g)



Step #20950.1342: HAR_etch

etch_noop · HAR_etch

1.04	2,181.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

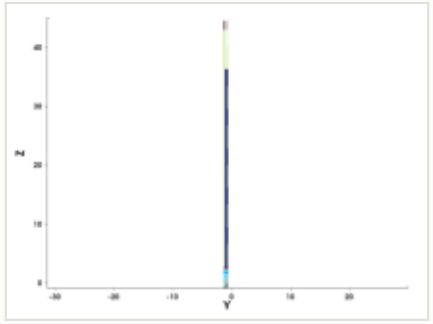

y cut at -1.035 µm

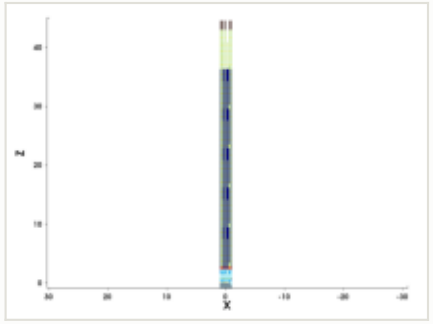

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

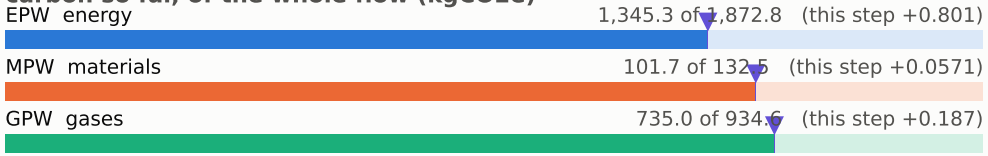

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

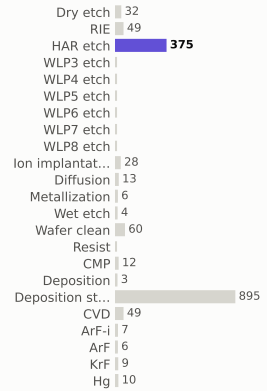

materials deposited (g)

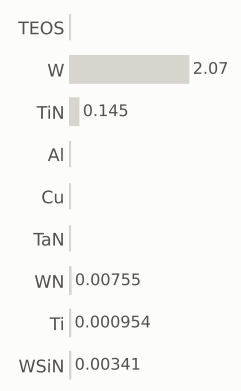

gases emitted (g)



Step #20950.2013: HAR_etch

etch_noop · HAR_etch

1.04	2,183.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

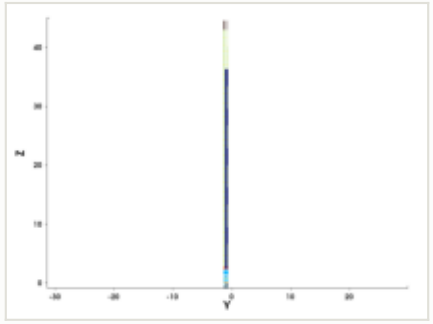

y cut at -1.035 µm

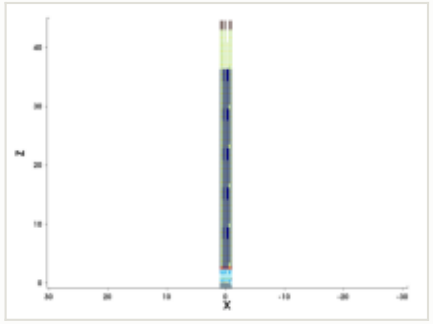

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

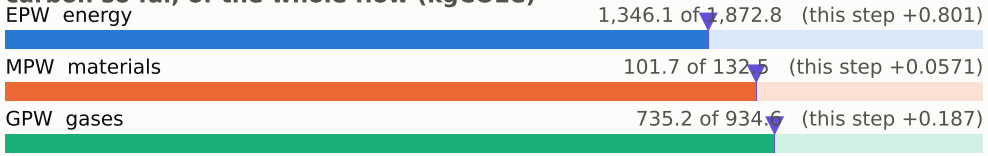

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

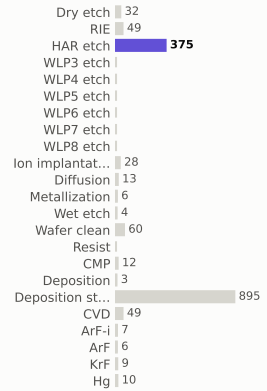

materials deposited (g)

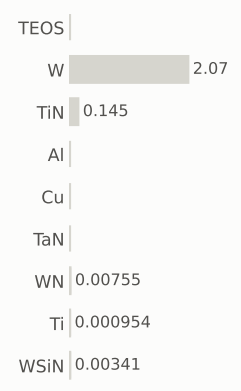

gases emitted (g)



Step #20950.2685: HAR_etch

etch_noop · HAR_etch

1.04	2,184.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

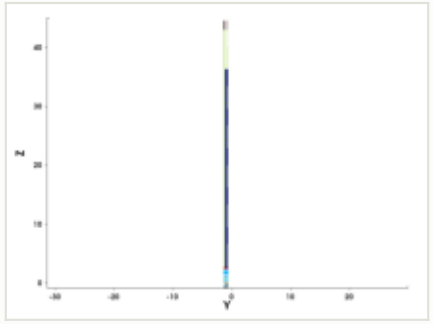

y cut at -1.035 µm

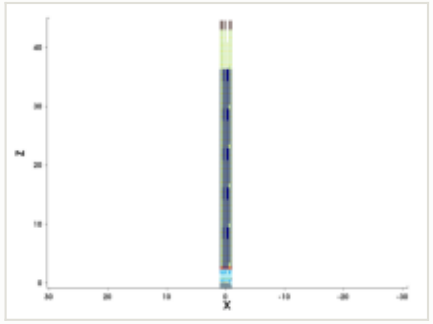

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

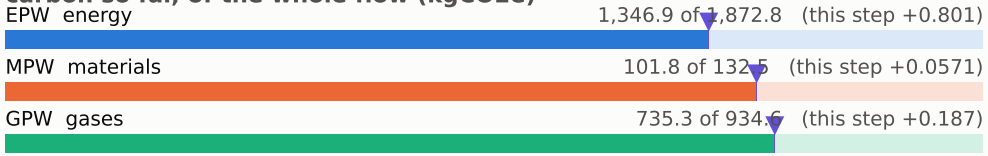

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

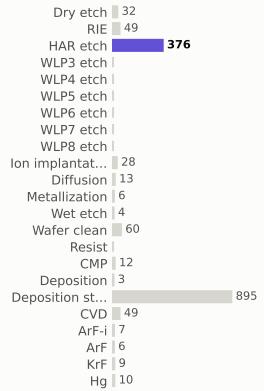

materials deposited (g)

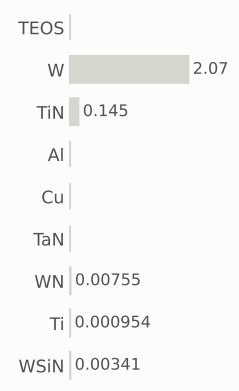

gases emitted (g)



Step #20950.3356: HAR_etch

etch_noop · HAR_etch

1.04	2,185.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

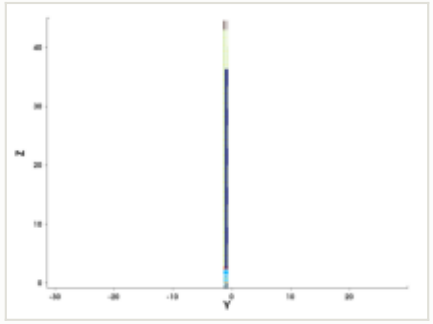

y cut at -1.035 µm

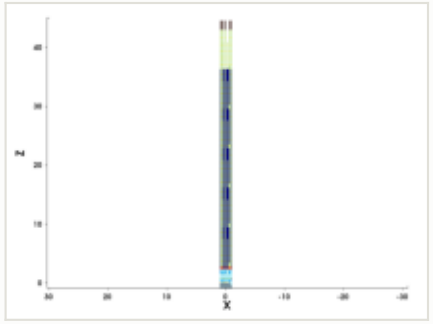

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

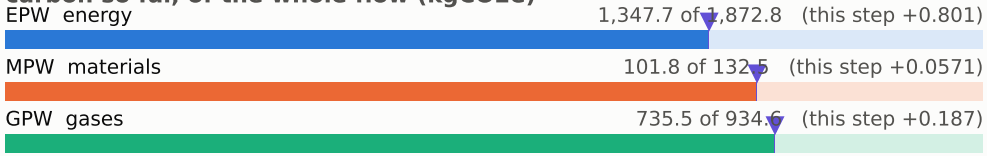

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

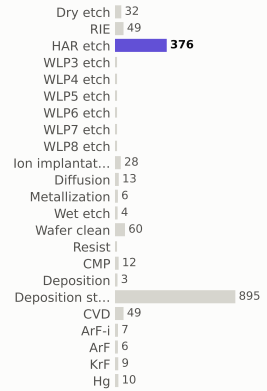

materials deposited (g)

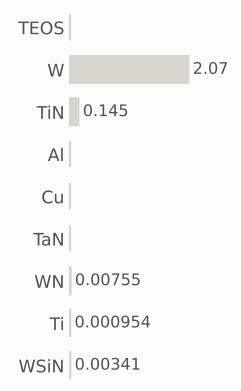

gases emitted (g)



Step #20950.4027: HAR_etch

etch_noop · HAR_etch

1.04	2,186.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

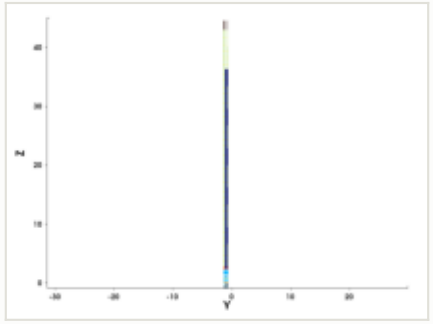

y cut at -1.035 µm

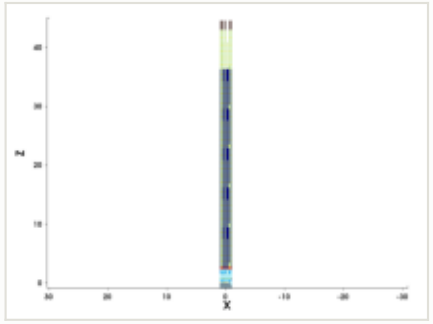

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

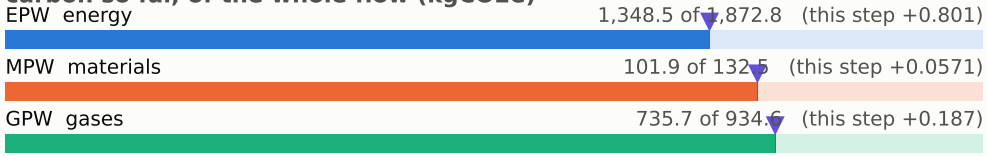

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

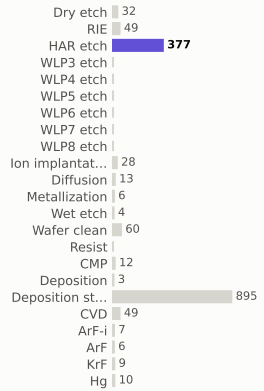

materials deposited (g)

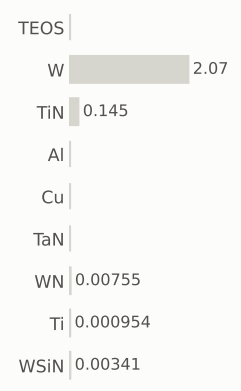

gases emitted (g)



Step #20950.4698: HAR_etch

etch_noop · HAR_etch

1.04	2,187.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

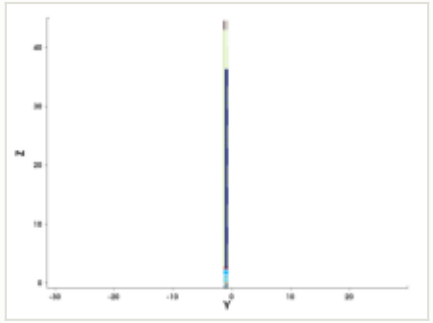

y cut at -1.035 µm

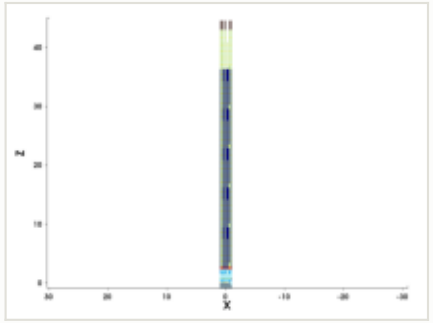

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

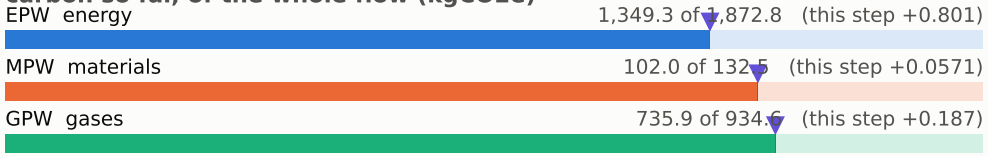

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

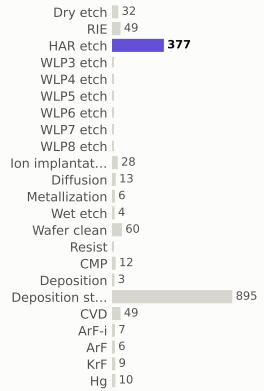

materials deposited (g)

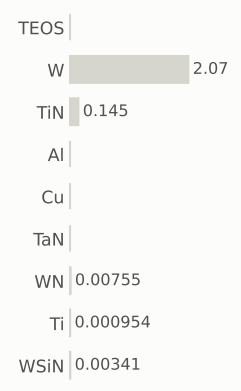

gases emitted (g)



Step #20950.5369: HAR_etch

etch_noop · HAR_etch

1.04	2,188.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

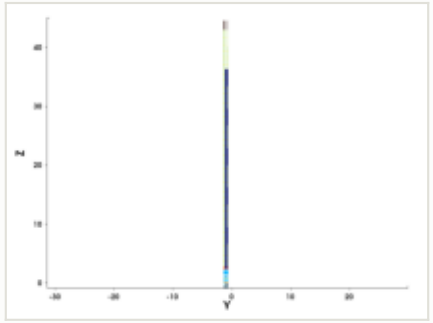

y cut at -1.035 µm

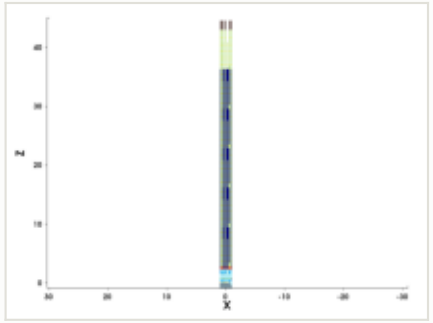

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

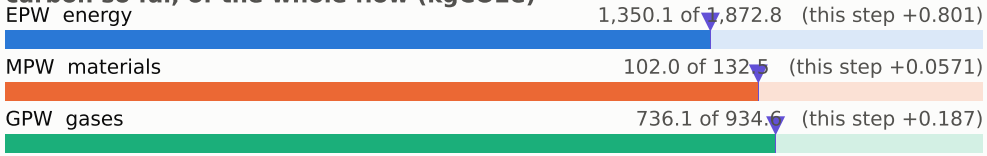

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

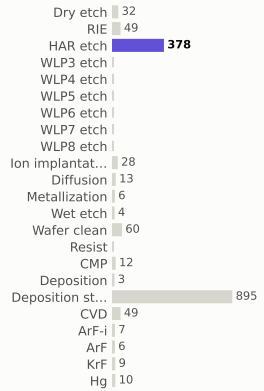

materials deposited (g)

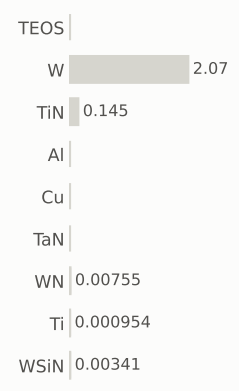

gases emitted (g)



Step #20950.604: HAR_etch

etch_noop · HAR_etch

1.04	2,189.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

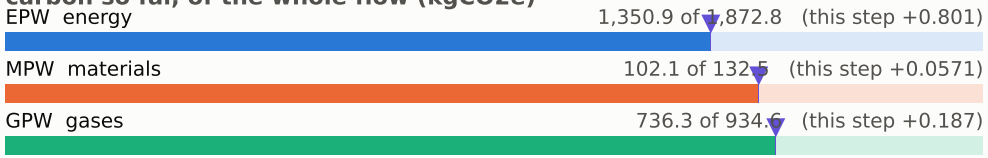

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

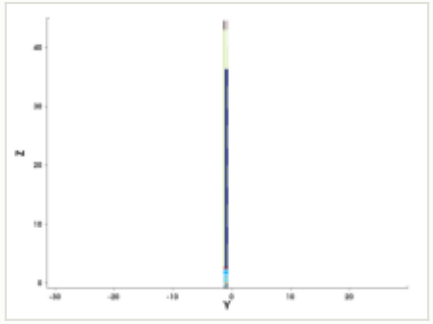

y cut at -1.035 µm

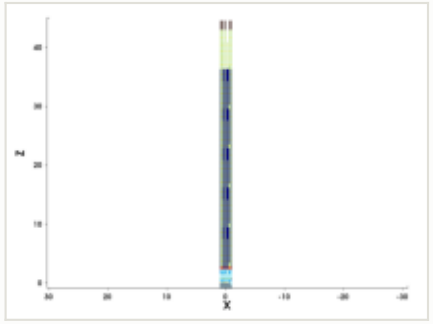

mask for this step

no mask for this step

steps by process area

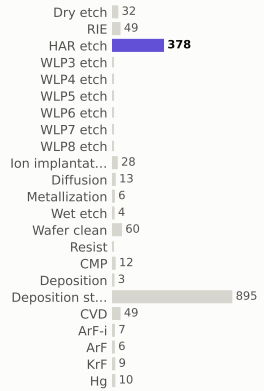

materials deposited (g)

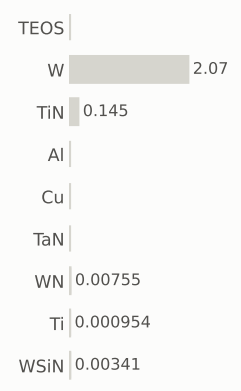

gases emitted (g)



Step #20950.6711: HAR_etch

etch_noop · HAR_etch

1.04	2,190.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

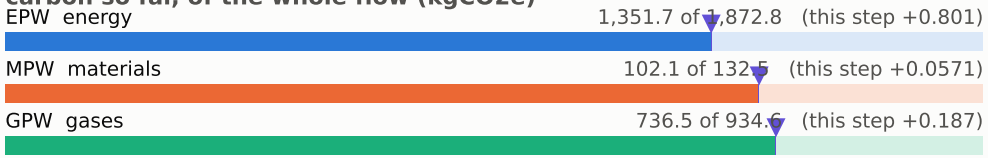

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

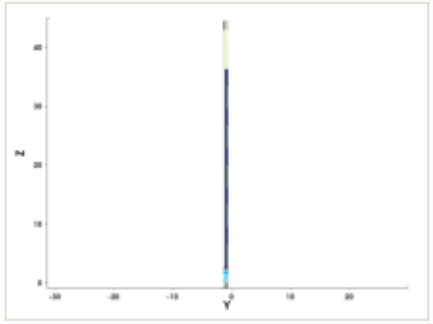

y cut at -1.035 µm

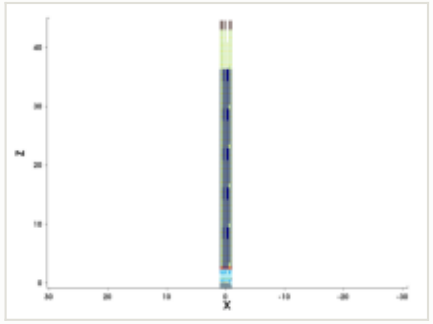

mask for this step

no mask for this step

steps by process area

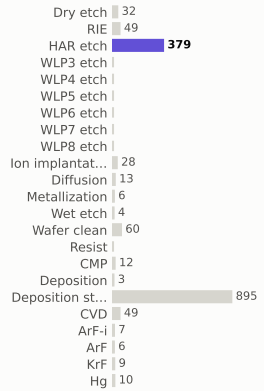

materials deposited (g)

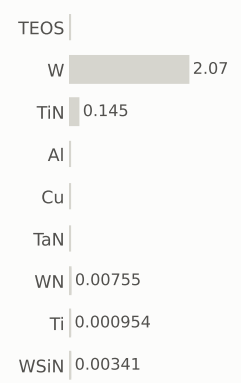

gases emitted (g)



Step #20950.7383: HAR_etch

etch_noop · HAR_etch

1.04	2,191.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

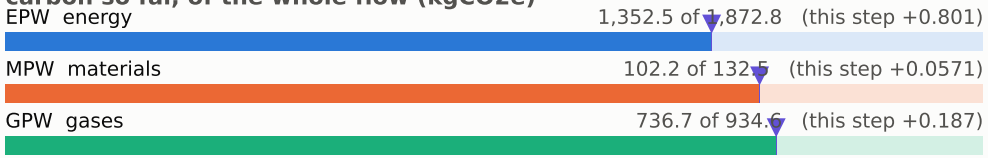

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

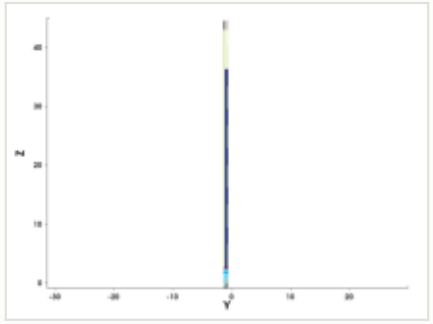

y cut at -1.035 µm

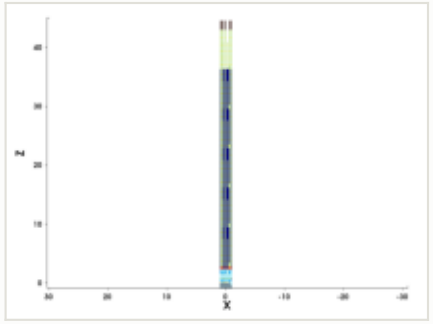

mask for this step

no mask for this step

steps by process area

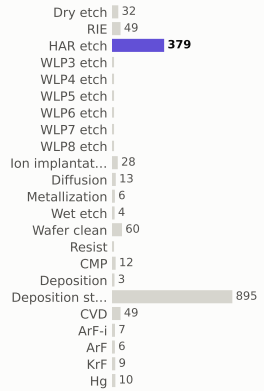

materials deposited (g)

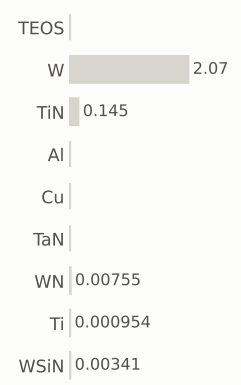

gases emitted (g)



Step #20950.8054: HAR_etch

etch_noop · HAR_etch

1.04	2,192.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

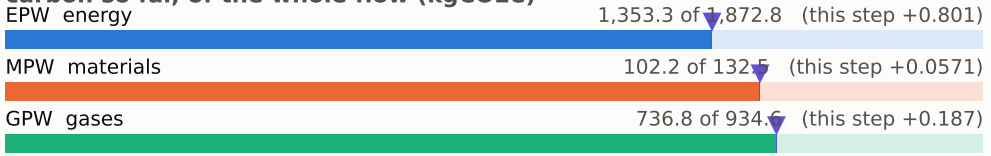

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

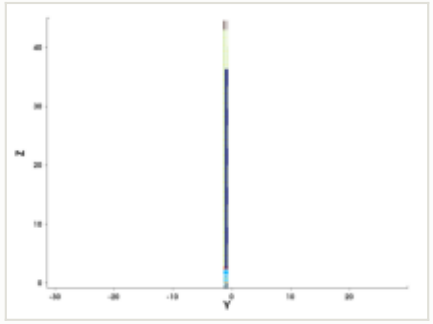

y cut at -1.035 µm

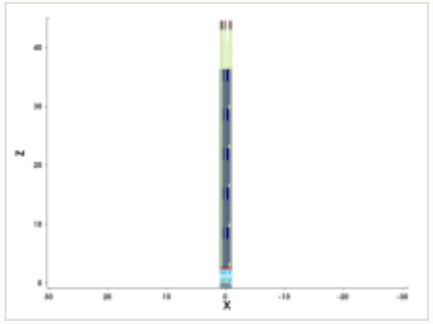

mask for this step

no mask for this step

steps by process area

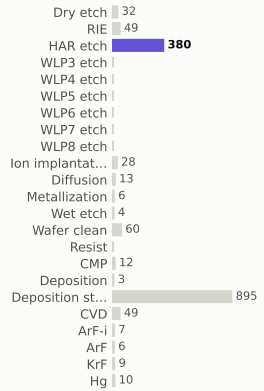

materials deposited (g)

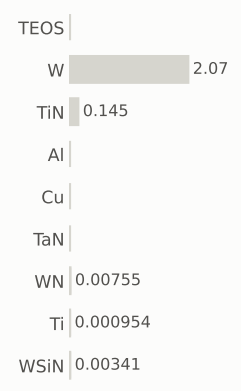

gases emitted (g)



Step #20950.8725: HAR_etch

etch_noop · HAR_etch

1.04	2,193.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

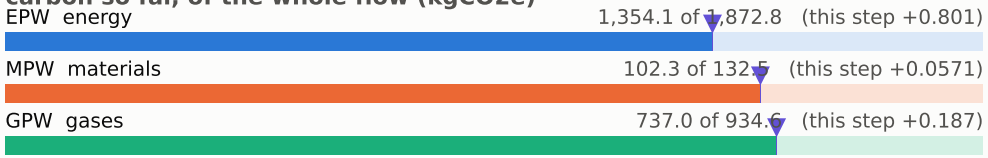

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

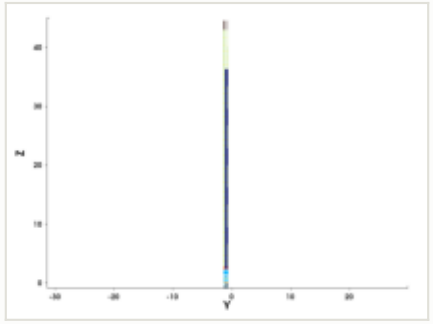

y cut at -1.035 µm

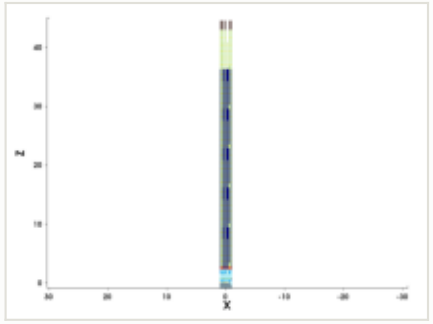

mask for this step

no mask for this step

steps by process area

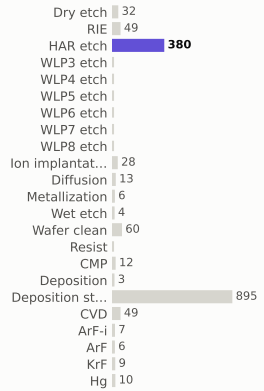

materials deposited (g)

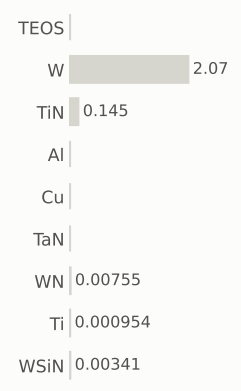

gases emitted (g)

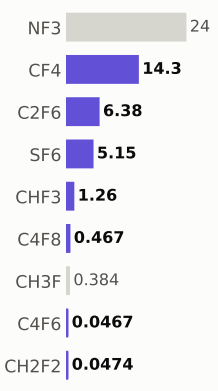

Step #20950.9396: HAR_etch

etch_noop · HAR_etch

1.04	2,194.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

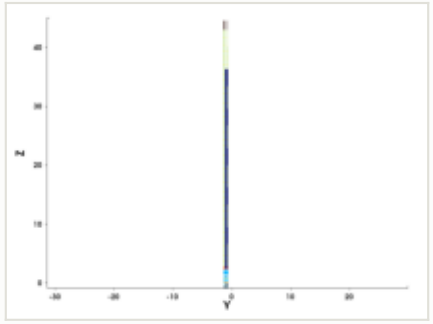

y cut at -1.035 µm

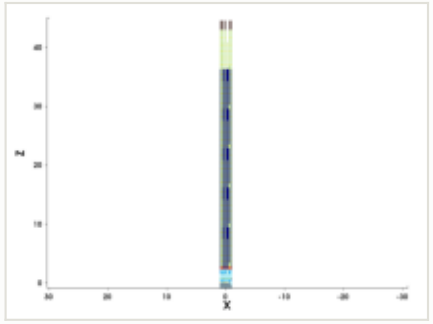

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

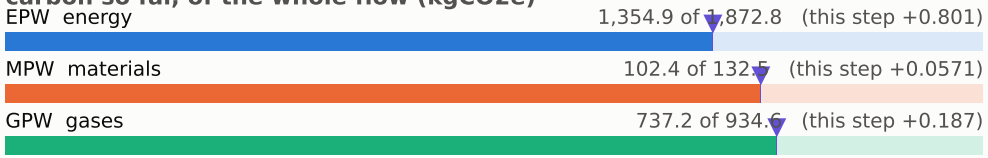

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

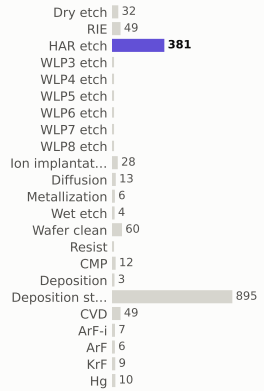

materials deposited (g)

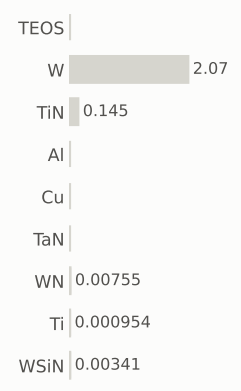

gases emitted (g)



Step #20951.0067: HAR_etch

etch_noop · HAR_etch

1.04	2,195.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

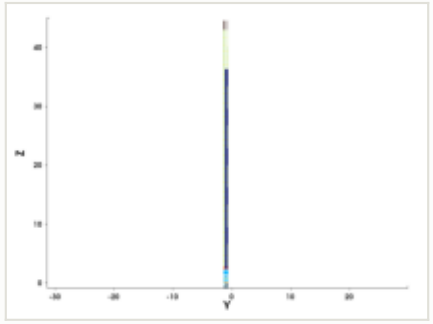

y cut at -1.035 µm

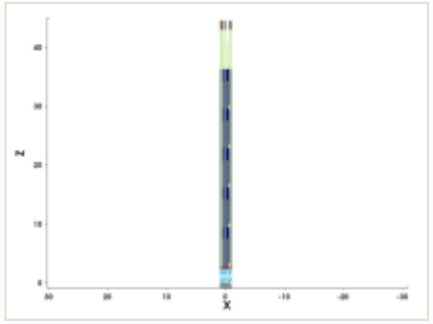

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

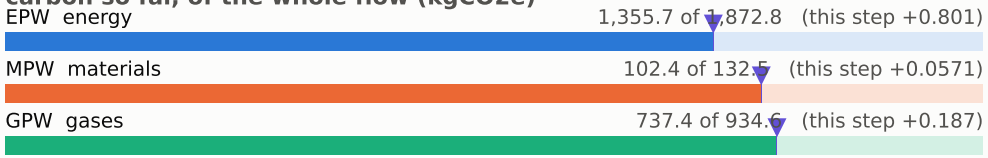

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

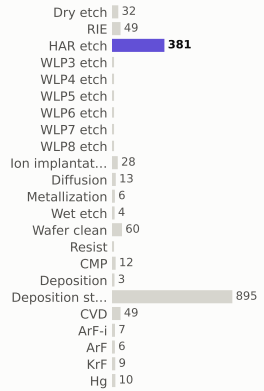

materials deposited (g)

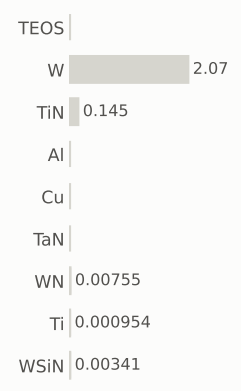

gases emitted (g)



Step #20951.0738: HAR_etch

etch_noop · HAR_etch

1.04	2,196.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

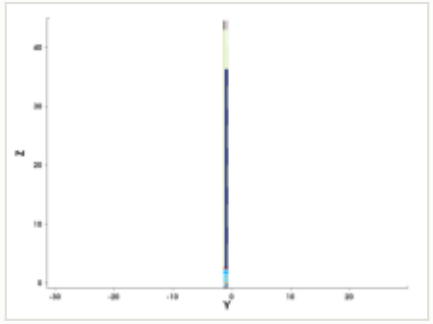

y cut at -1.035 µm

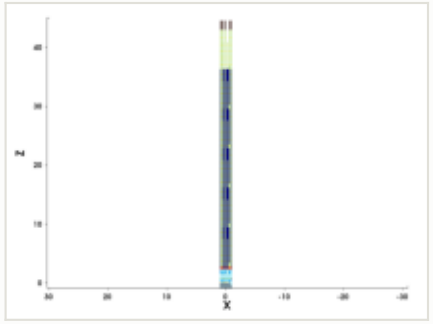

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

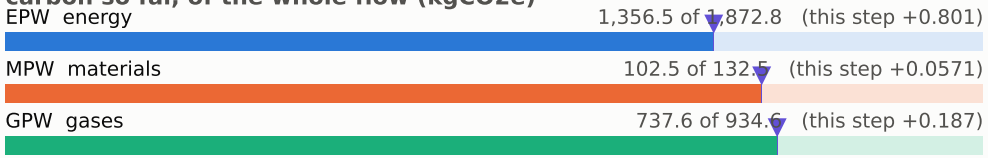

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

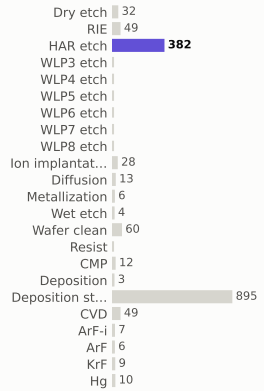

materials deposited (g)

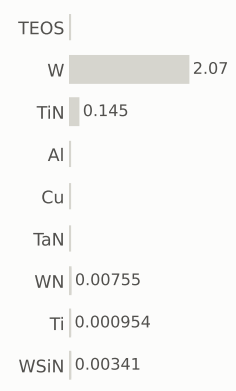

gases emitted (g)

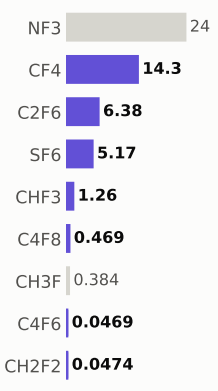

Step #20951.1409: HAR_etch

etch_noop · HAR_etch

1.04	2,197.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

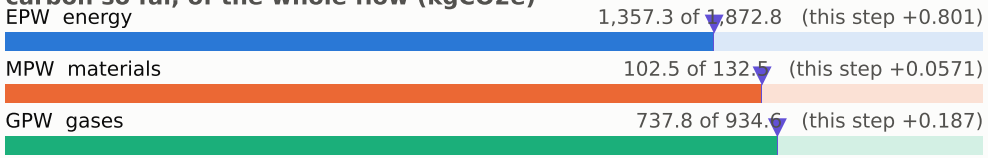

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

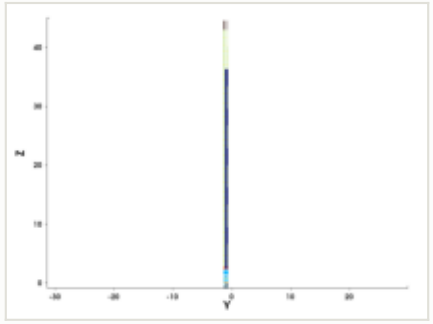

y cut at -1.035 µm

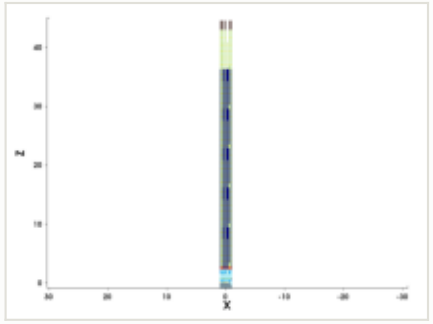

mask for this step

no mask for this step

steps by process area

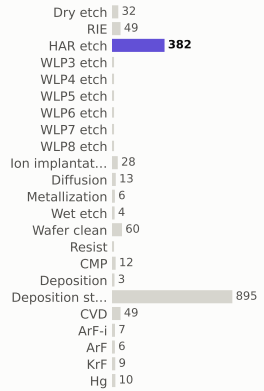

materials deposited (g)

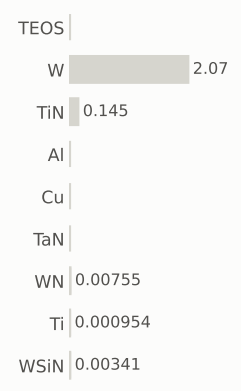

gases emitted (g)



Step #20951.2081: HAR_etch

etch_noop · HAR_etch

1.04	2,198.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

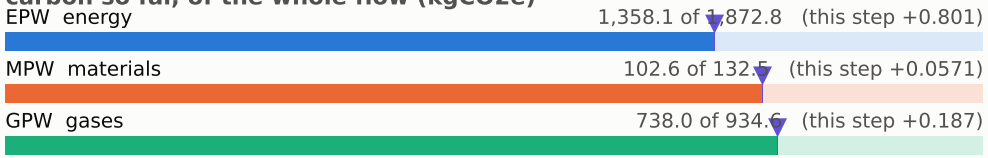

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

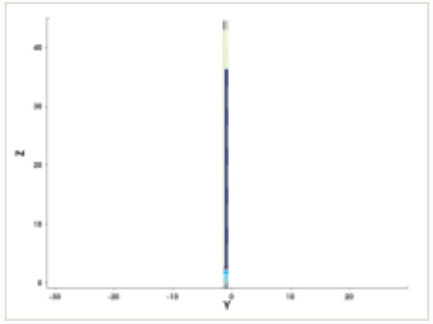

y cut at -1.035 µm

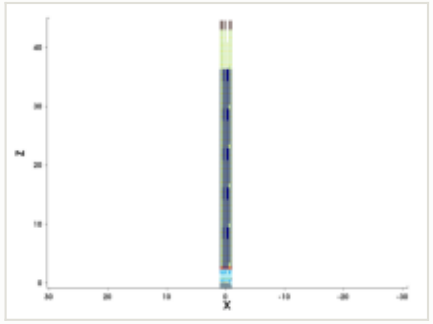

mask for this step

no mask for this step

steps by process area

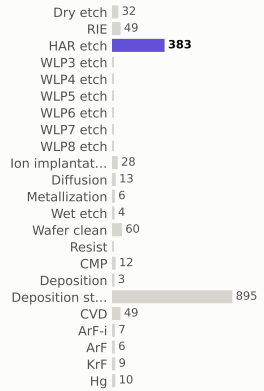

materials deposited (g)

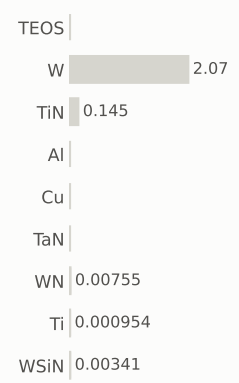

gases emitted (g)



Step #20951.2752: HAR_etch

etch_noop · HAR_etch

1.04	2,199.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

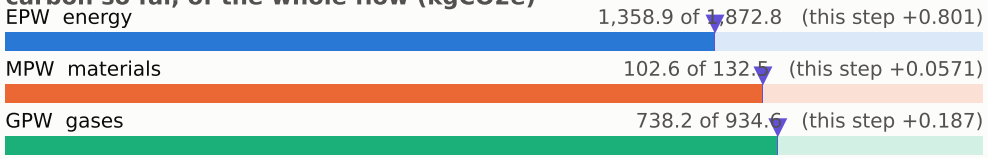

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

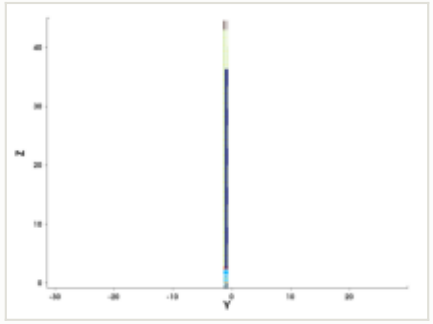

y cut at -1.035 µm

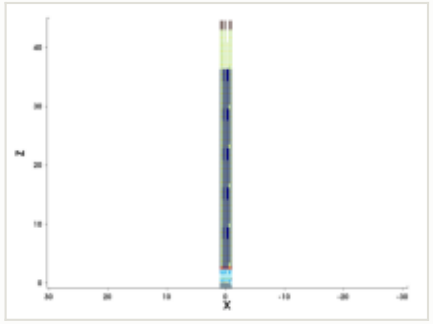

mask for this step

no mask for this step

steps by process area

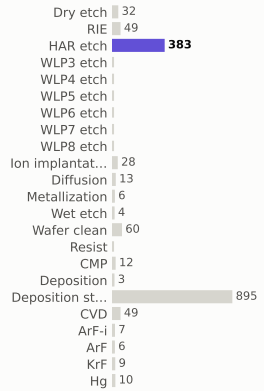

materials deposited (g)

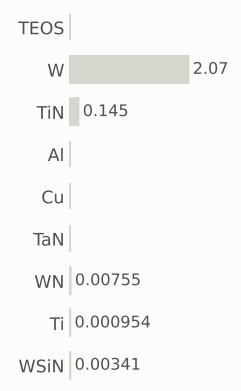

gases emitted (g)



Step #20951.3423: HAR_etch

etch_noop · HAR_etch

1.04	2,200.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

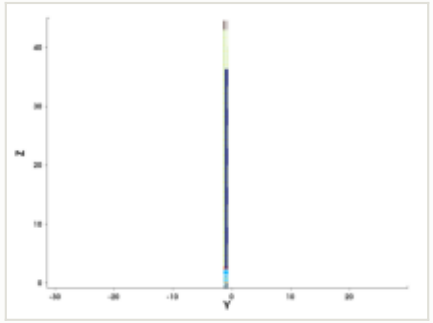

y cut at -1.035 µm

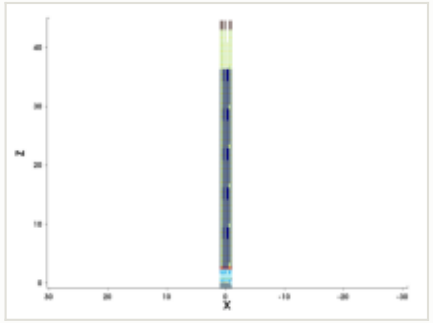

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

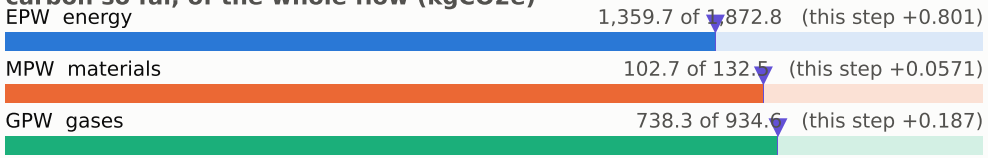

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

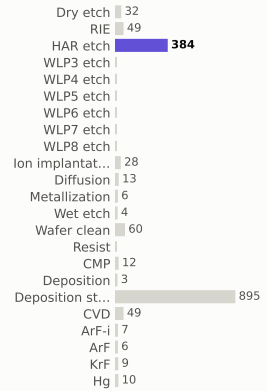

materials deposited (g)

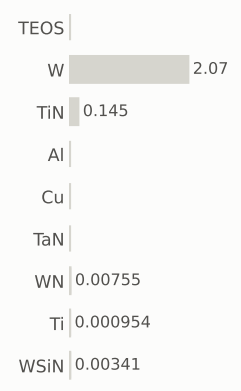

gases emitted (g)



Step #20951.4094: HAR_etch

etch_noop · HAR_etch

1.04	2,201.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

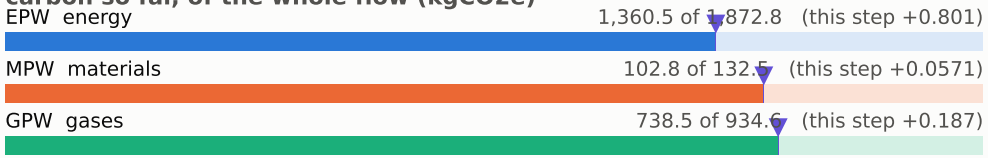

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

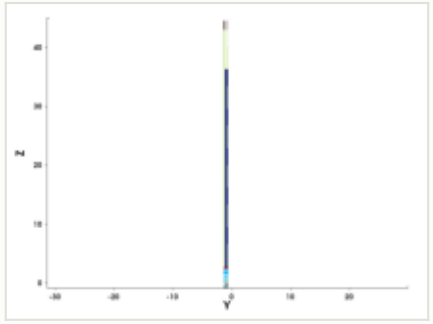

y cut at -1.035 µm

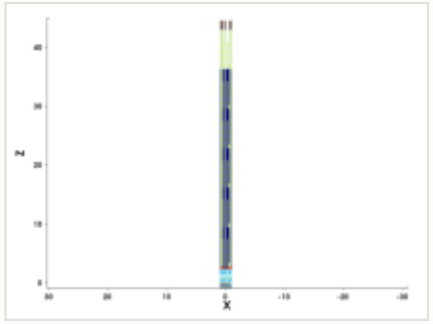

mask for this step

no mask for this step

steps by process area

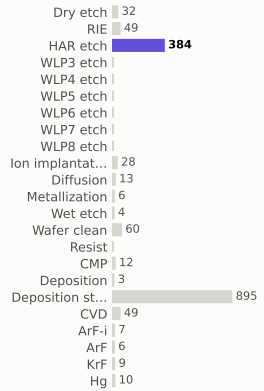

materials deposited (g)

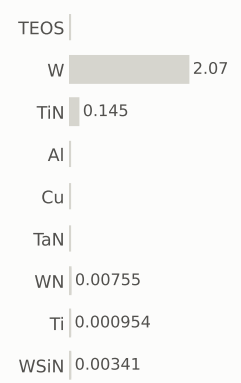

gases emitted (g)



Step #20951.4765: HAR_etch

etch_noop · HAR_etch

1.04	2,202.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

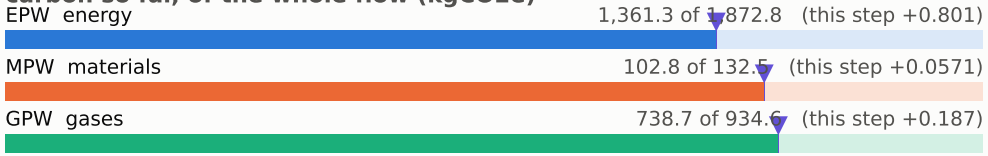

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

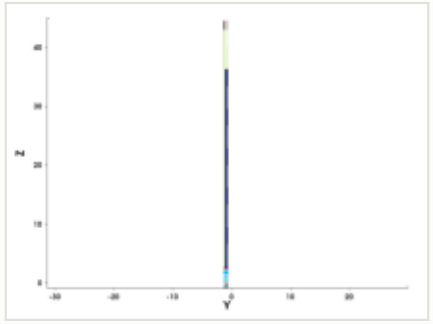

y cut at -1.035 µm

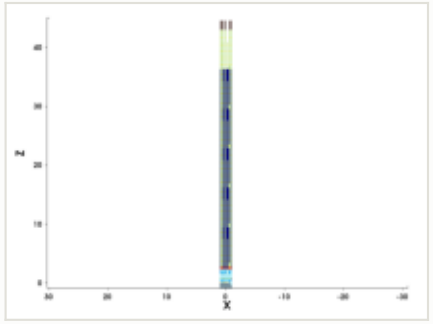

mask for this step

no mask for this step

steps by process area

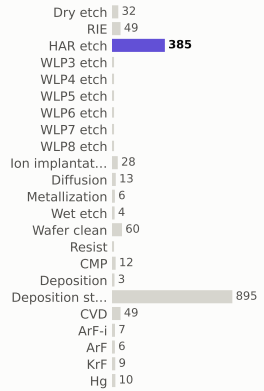

materials deposited (g)

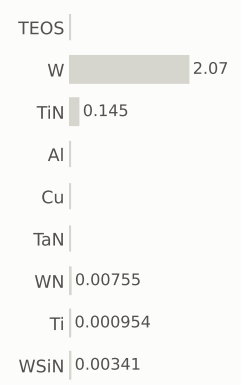

gases emitted (g)



Step #20951.5436: HAR_etch

etch_noop · HAR_etch

1.04	2,203.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

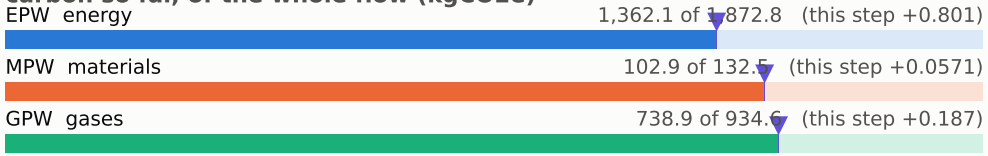

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

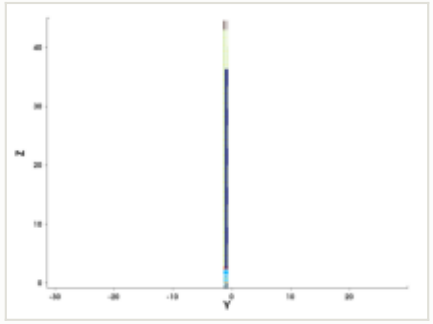

y cut at -1.035 µm

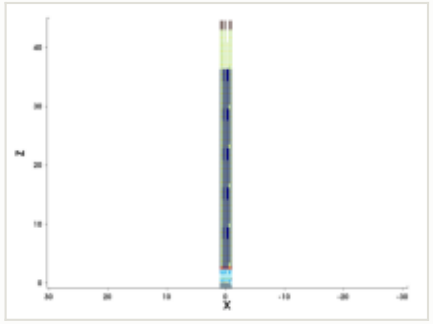

mask for this step

no mask for this step

steps by process area

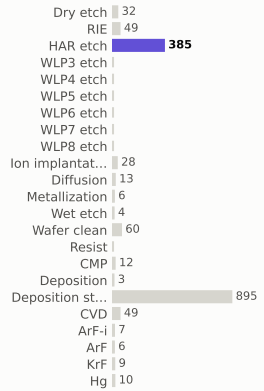

materials deposited (g)

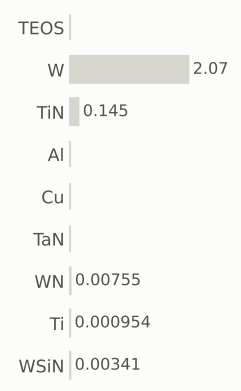

gases emitted (g)



Step #20951.6107: HAR_etch

etch_noop · HAR_etch

1.04	2,204.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

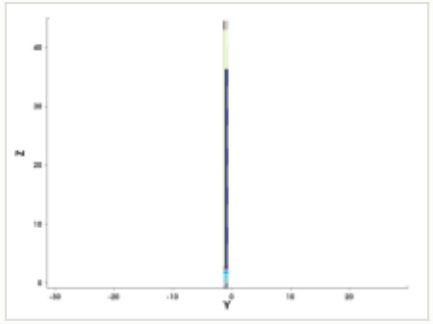

y cut at -1.035 µm

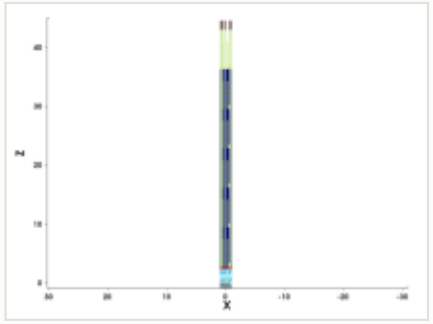

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

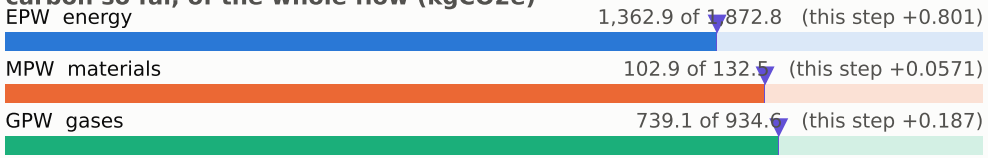

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

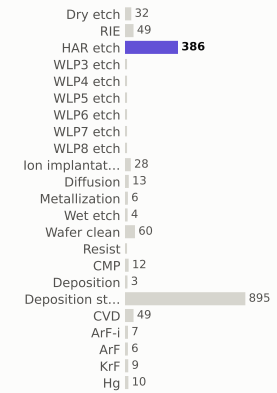

materials deposited (g)

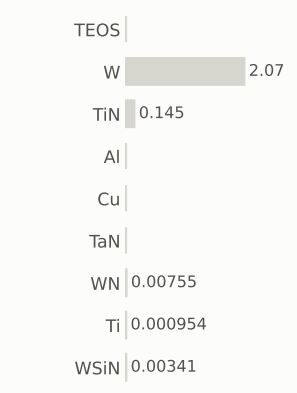

gases emitted (g)

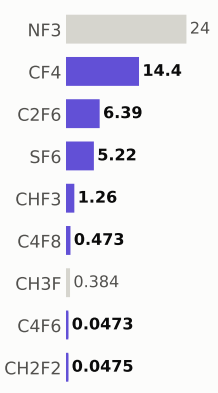

Step #20951.6779: HAR_etch

etch_noop · HAR_etch

1.04	2,206.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

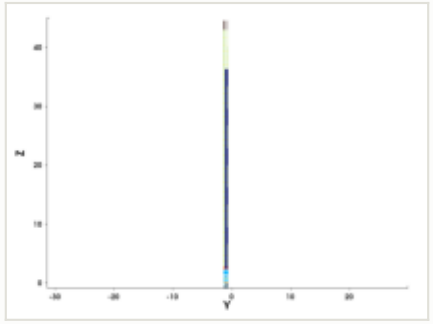

y cut at -1.035 µm

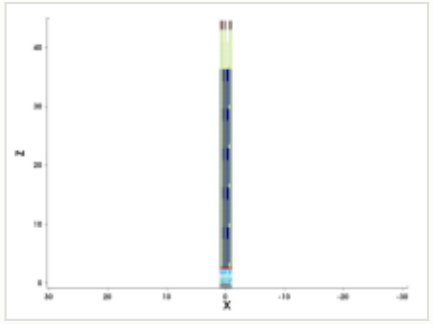

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

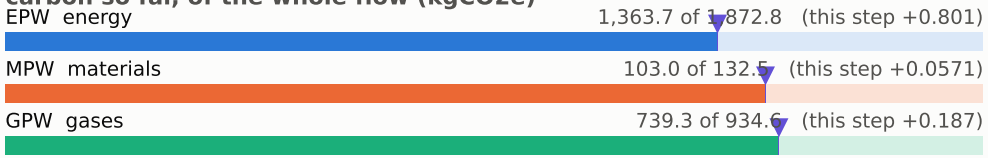

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

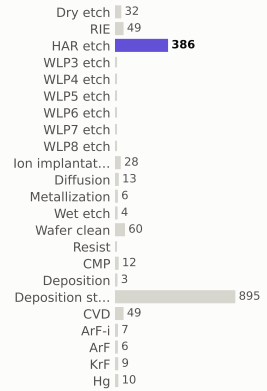

materials deposited (g)

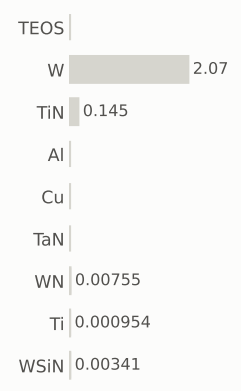

gases emitted (g)



Step #20951.745: HAR_etch

etch_noop · HAR_etch

1.04	2,207.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

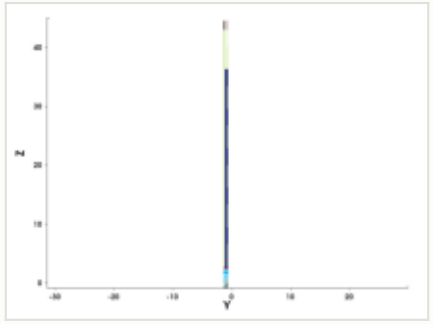

y cut at -1.035 µm

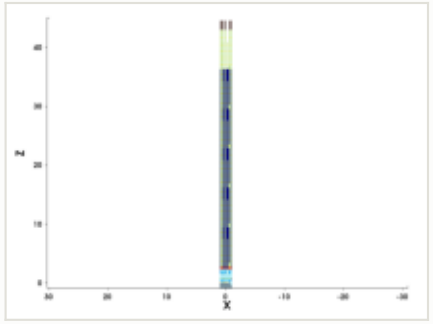

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

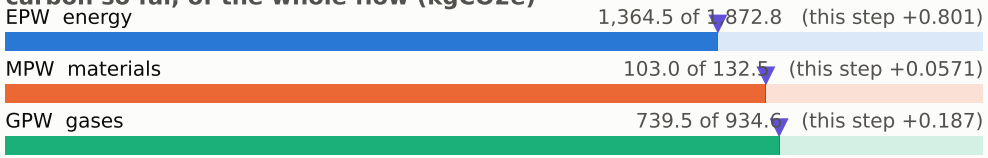

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

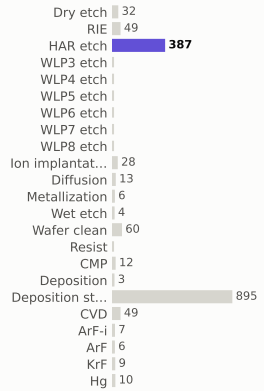

materials deposited (g)

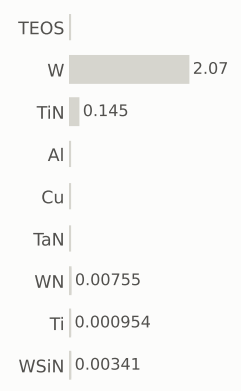

gases emitted (g)



Step #20951.8121: HAR_etch

etch_noop · HAR_etch

1.04	2,208.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

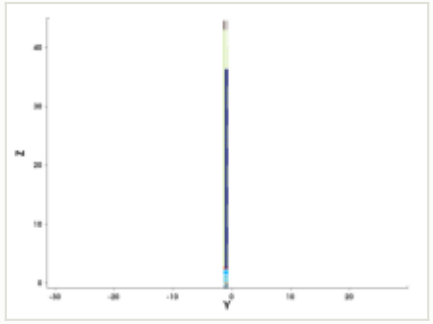

y cut at -1.035 µm

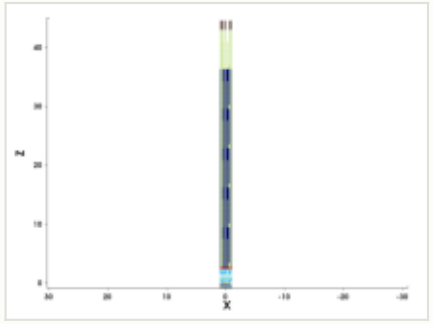

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

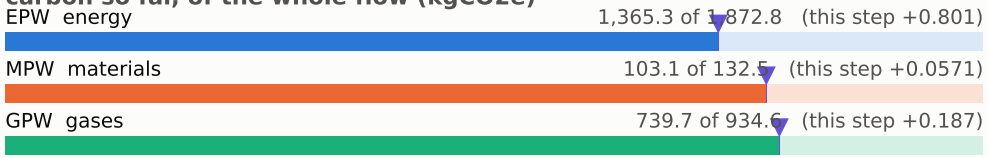

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

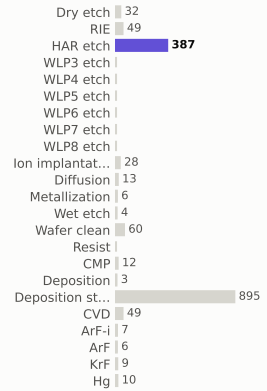

materials deposited (g)

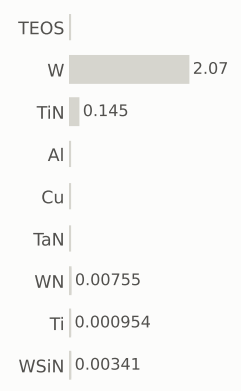

gases emitted (g)



Step #20951.8792: HAR_etch

etch_noop · HAR_etch

1.04	2,209.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

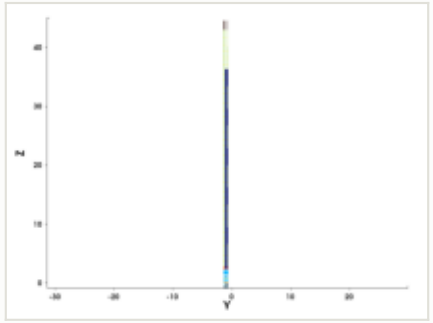

y cut at -1.035 µm

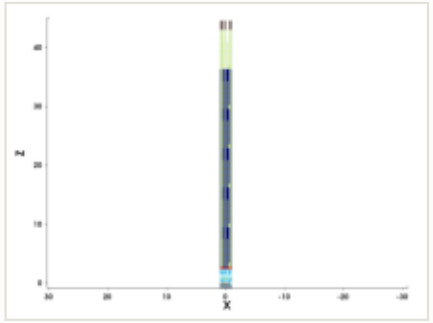

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

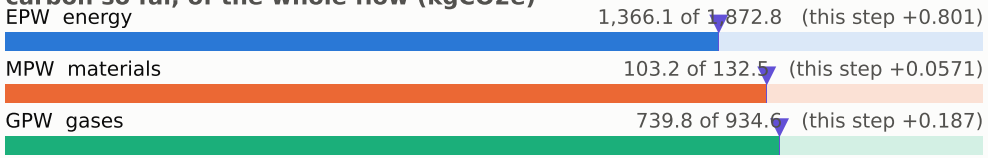

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

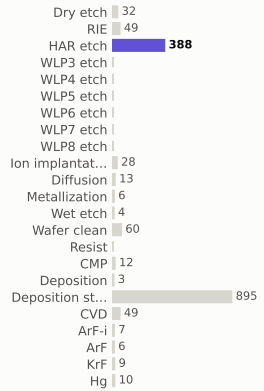

materials deposited (g)

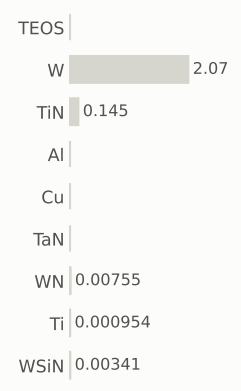

gases emitted (g)



Step #20951.9463: HAR_etch

etch_noop · HAR_etch

1.04	2,210.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

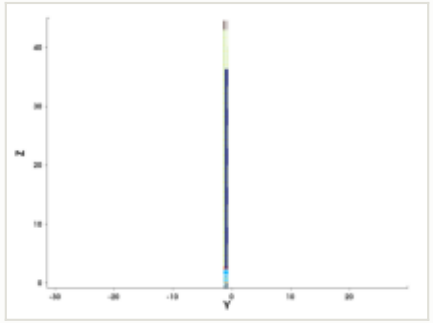

y cut at -1.035 µm

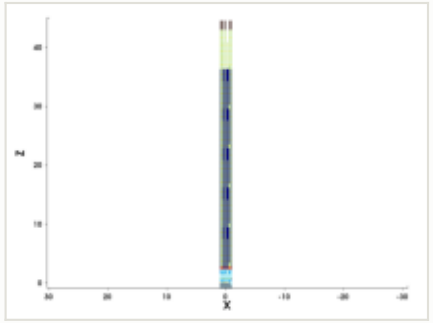

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

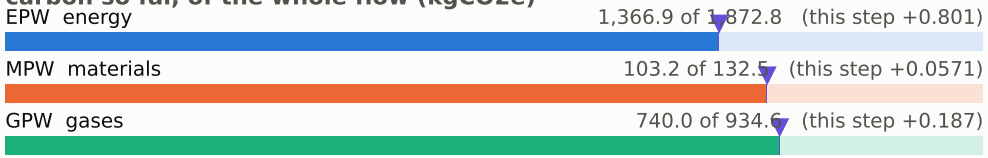

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

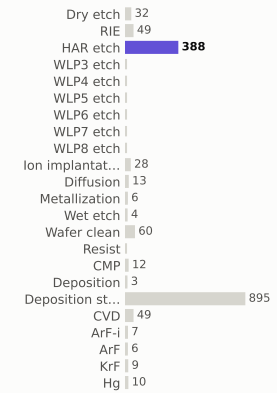

materials deposited (g)

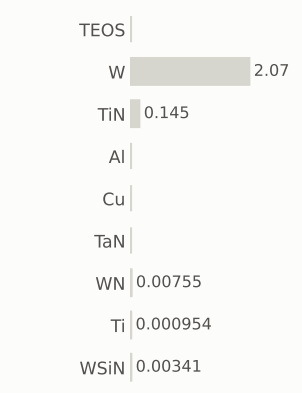

gases emitted (g)

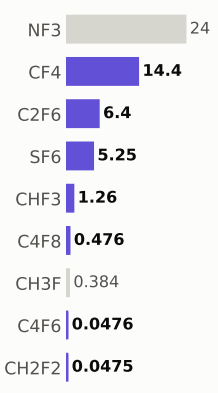

Step #20952.0134: HAR_etch

etch_noop · HAR_etch

1.04	2,211.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

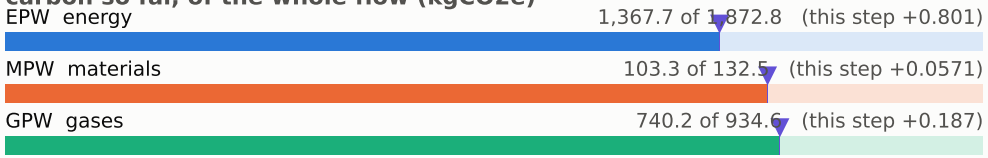

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

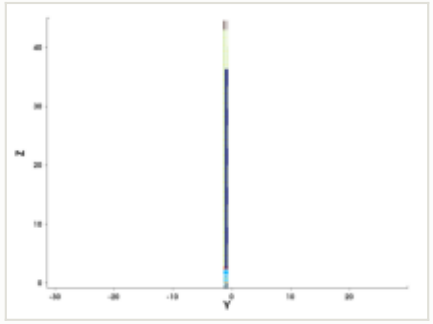

y cut at -1.035 µm

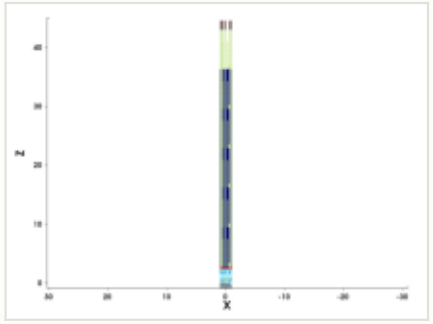

mask for this step

no mask for this step

steps by process area

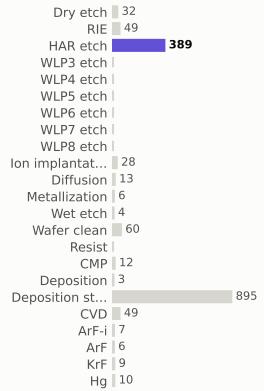

materials deposited (g)

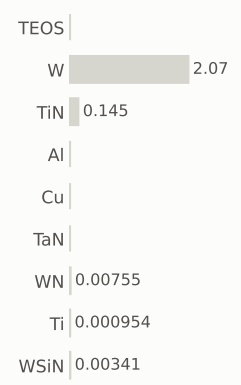

gases emitted (g)



Step #20952.0805: HAR_etch

etch_noop · HAR_etch

1.04	2,212.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

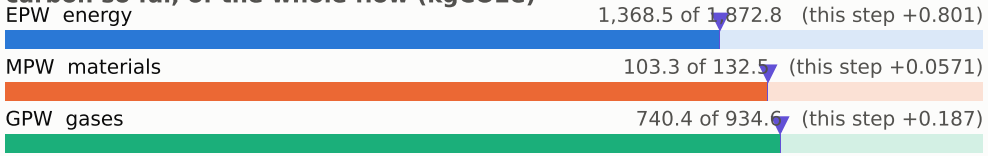

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

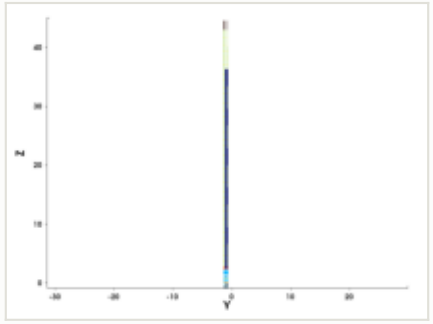

y cut at -1.035 µm

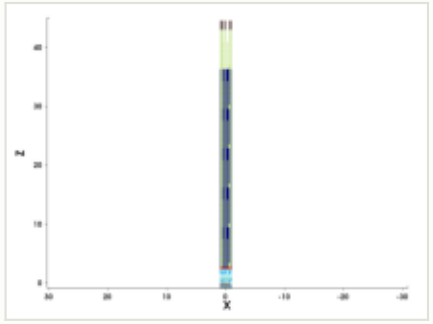

mask for this step

no mask for this step

steps by process area

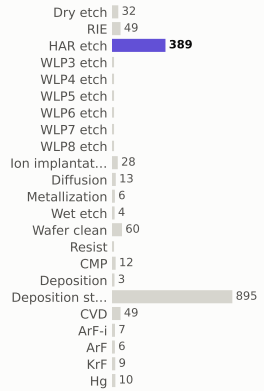

materials deposited (g)

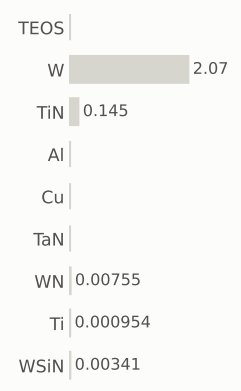

gases emitted (g)



Step #20952.1477: HAR_etch

etch_noop · HAR_etch

1.04	2,213.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

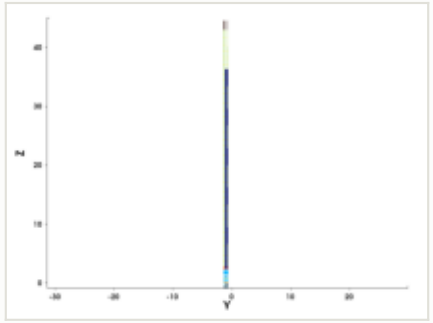

y cut at -1.035 µm

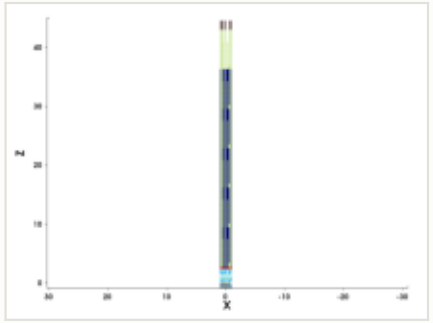

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

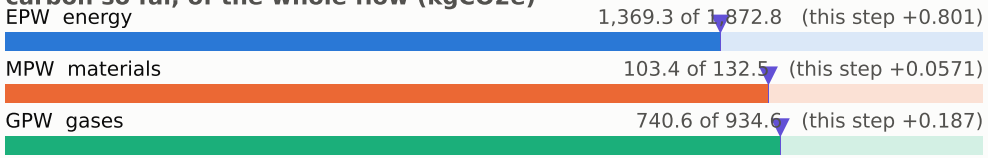

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

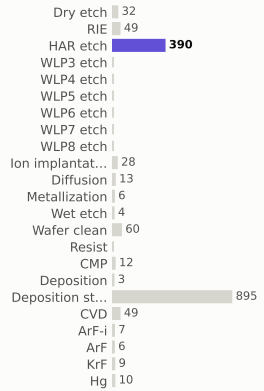

materials deposited (g)

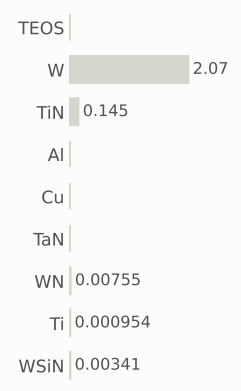

gases emitted (g)



Step #20952.2148: HAR_etch

etch_noop · HAR_etch

1.04	2,214.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

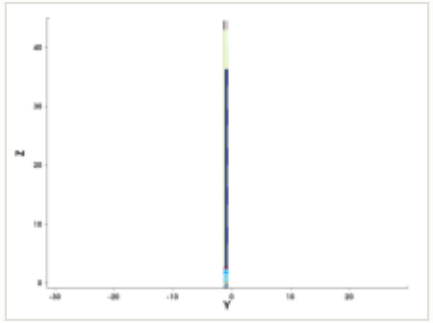

y cut at -1.035 µm

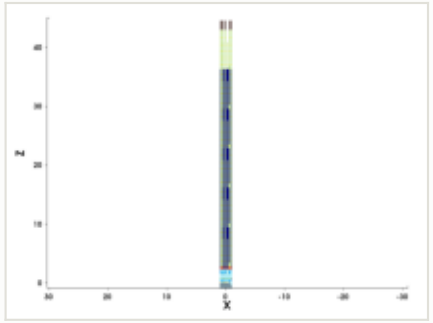

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

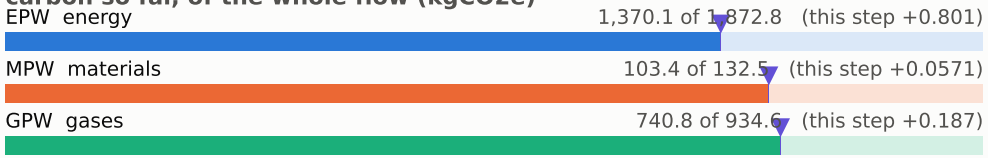

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

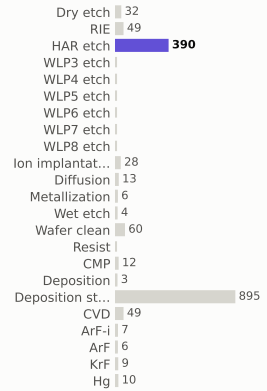

materials deposited (g)

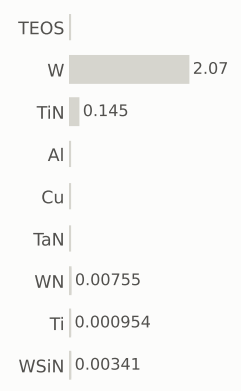

gases emitted (g)



Step #20952.2819: HAR_etch

etch_noop · HAR_etch

1.04	2,215.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

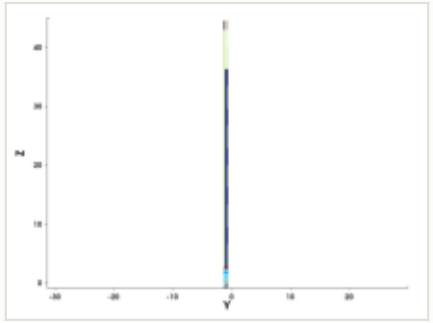

y cut at -1.035 µm

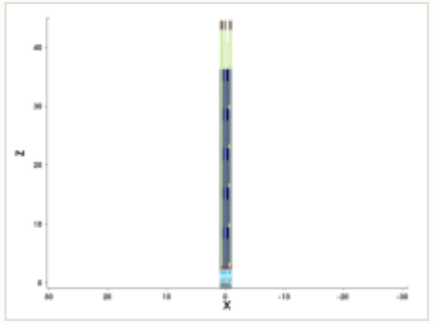

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

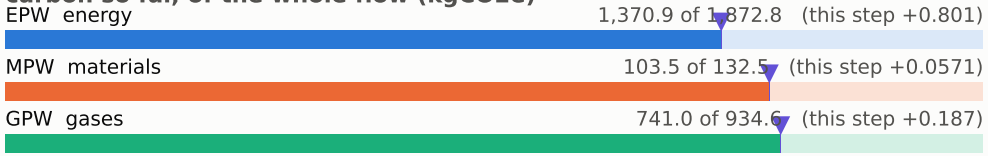

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

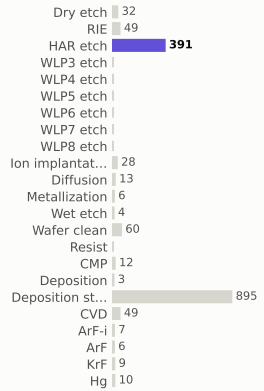

materials deposited (g)

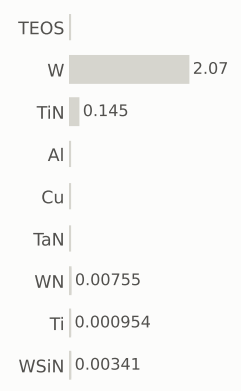

gases emitted (g)



Step #20952.349: HAR_etch

etch_noop · HAR_etch

1.04	2,216.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

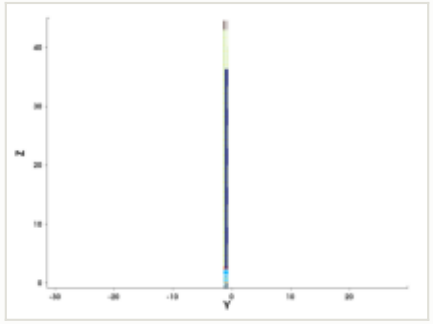

y cut at -1.035 µm

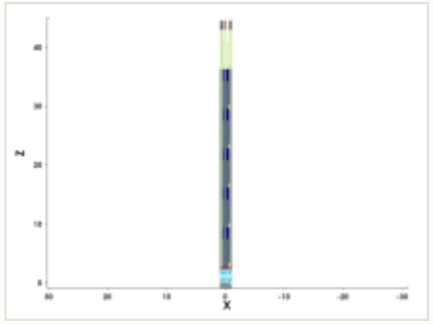

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

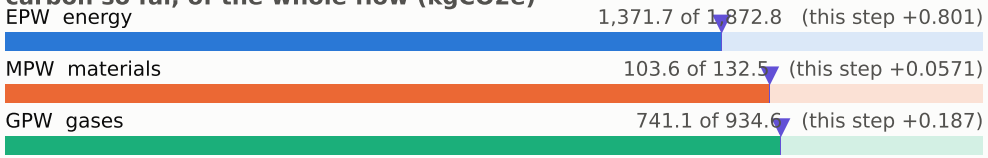

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

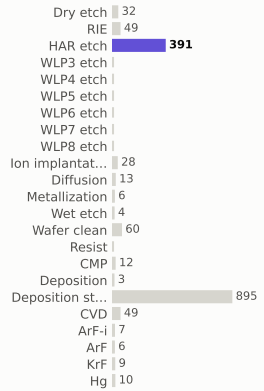

materials deposited (g)

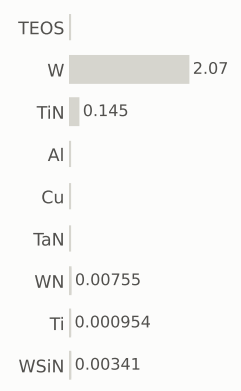

gases emitted (g)



Step #20952.4161: HAR_etch

etch_noop · HAR_etch

1.04	2,217.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

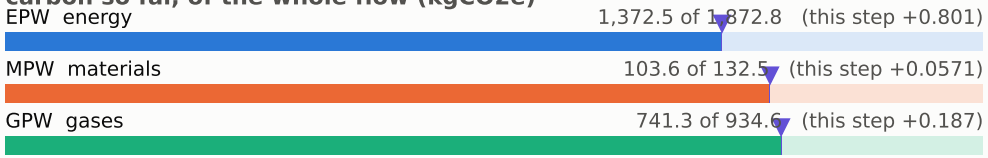

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

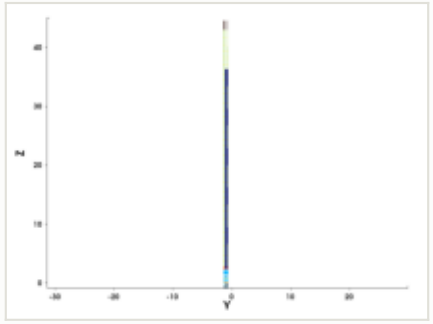

y cut at -1.035 µm

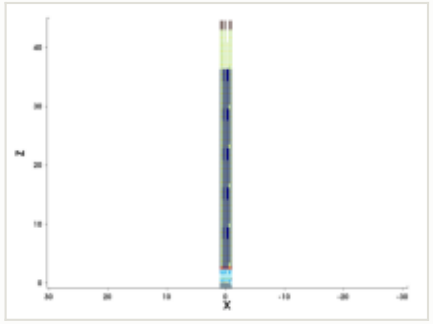

mask for this step

no mask for this step

steps by process area

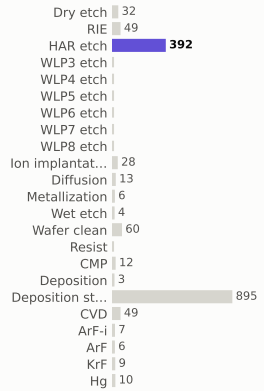

materials deposited (g)

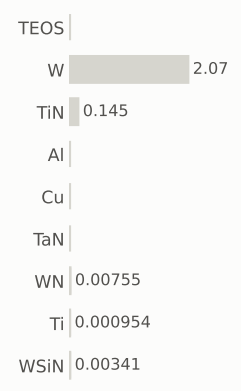

gases emitted (g)



Step #20952.4832: HAR_etch

etch_noop · HAR_etch

1.04	2,218.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

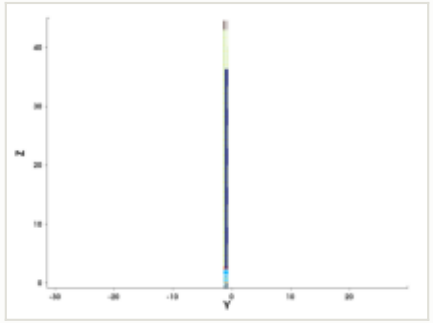

y cut at -1.035 µm

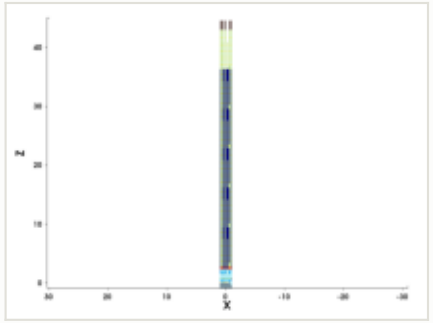

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

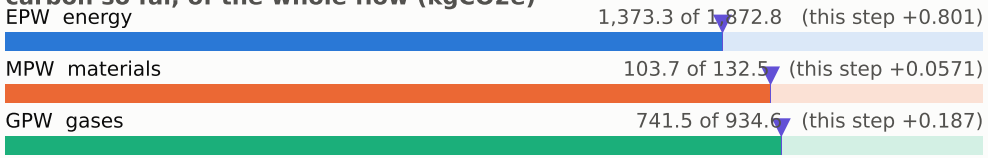

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

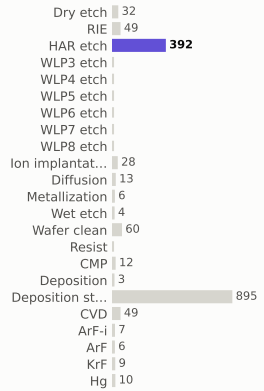

materials deposited (g)

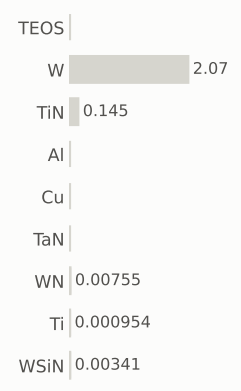

gases emitted (g)



Step #20952.5503: HAR_etch

etch_noop · HAR_etch

1.04	2,219.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

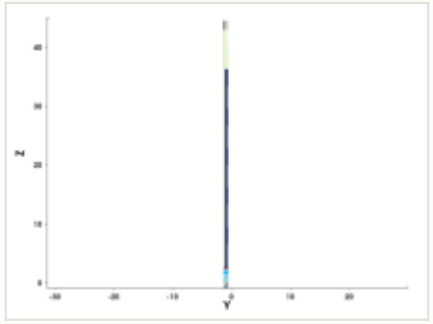

y cut at -1.035 µm

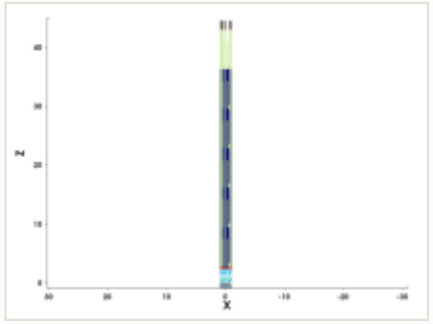

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

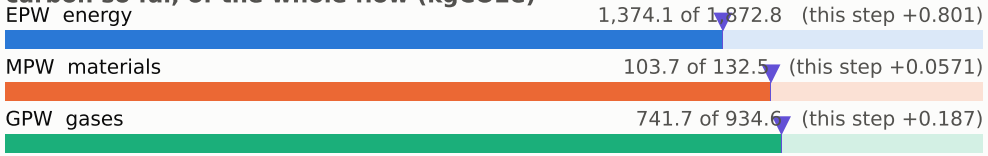

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

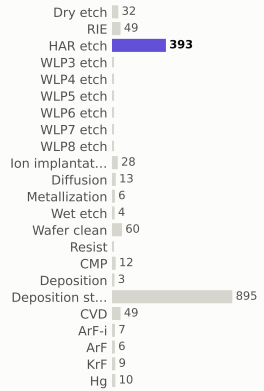

materials deposited (g)

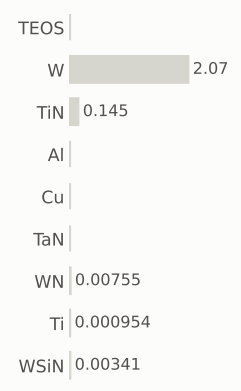

gases emitted (g)



Step #20952.6174: HAR_etch

etch_noop · HAR_etch

1.04	2,220.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

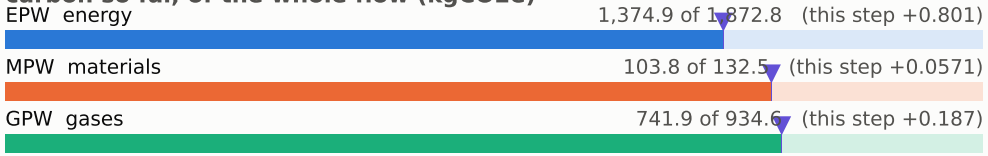

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

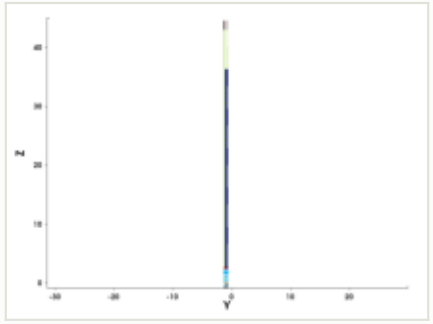

y cut at -1.035 µm

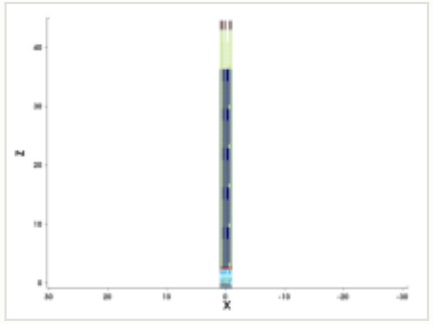

mask for this step

no mask for this step

steps by process area

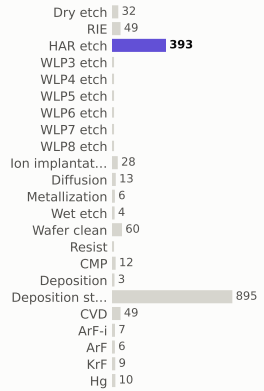

materials deposited (g)

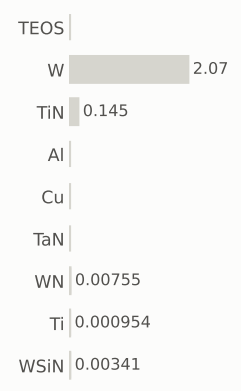

gases emitted (g)



Step #20952.6846: HAR_etch

etch_noop · HAR_etch

1.04	2,221.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

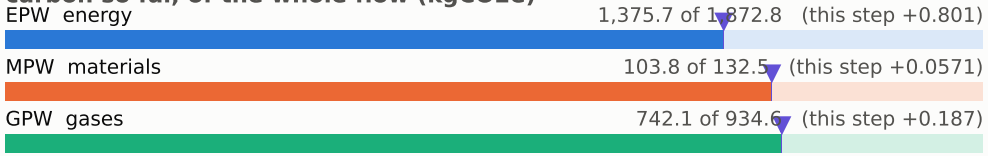

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

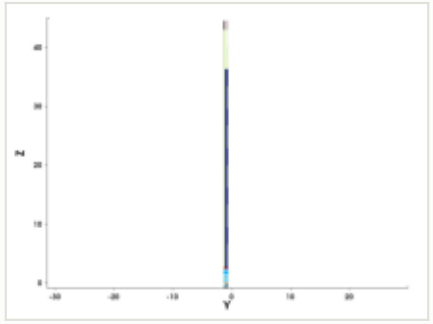

y cut at -1.035 µm

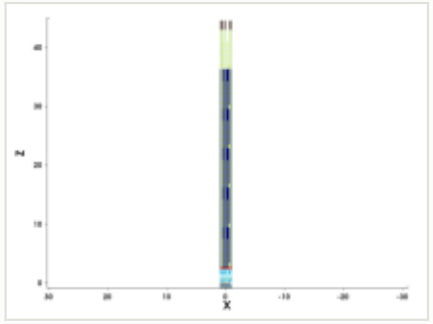

mask for this step

no mask for this step

steps by process area

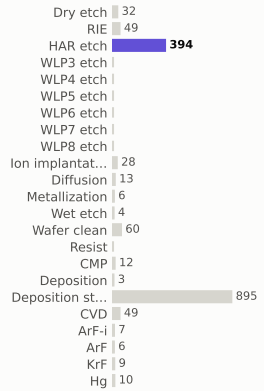

materials deposited (g)

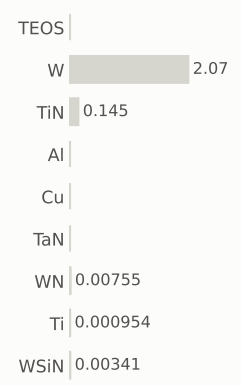

gases emitted (g)



Step #20952.7517: HAR_etch

etch_noop · HAR_etch

1.04	2,222.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

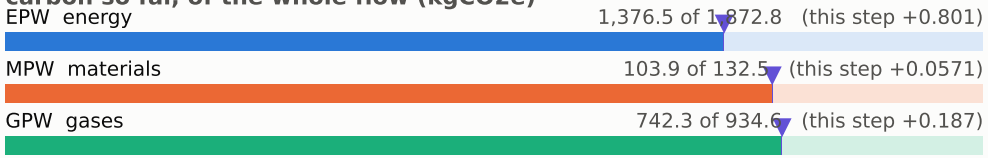

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

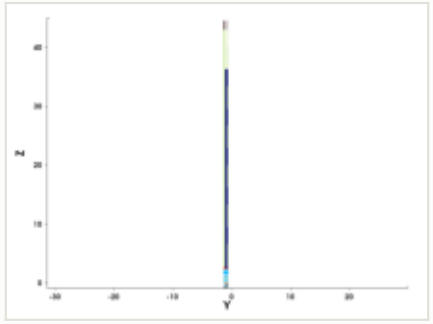

y cut at -1.035 µm

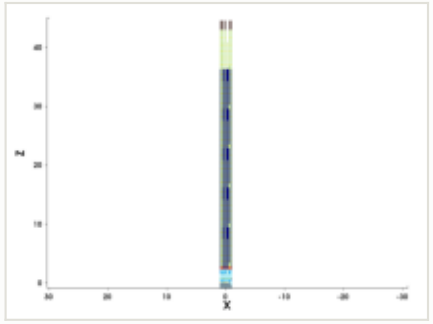

mask for this step

no mask for this step

steps by process area

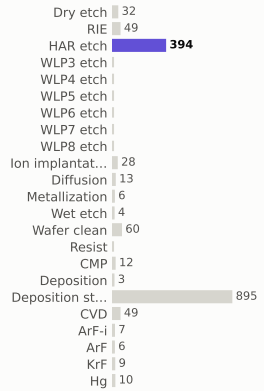

materials deposited (g)

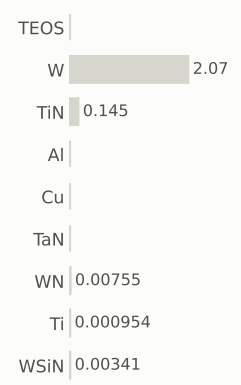

gases emitted (g)



Step #20952.8188: HAR_etch

etch_noop · HAR_etch

1.04	2,223.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

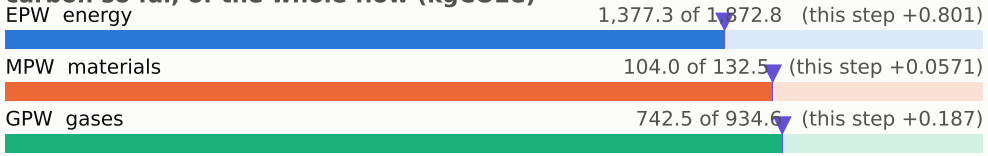

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

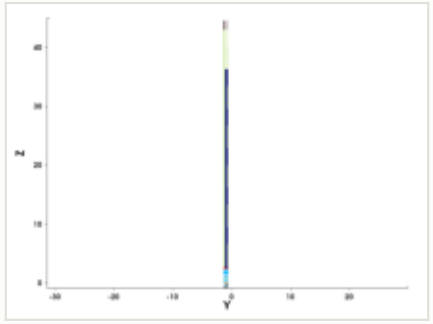

y cut at -1.035 µm

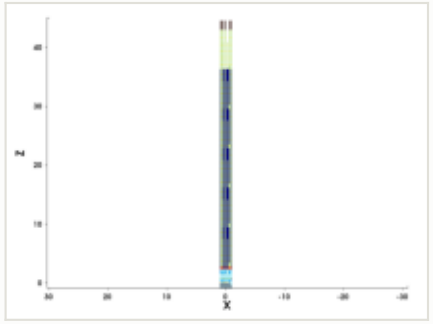

mask for this step

no mask for this step

steps by process area

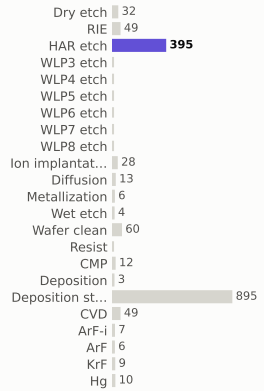

materials deposited (g)

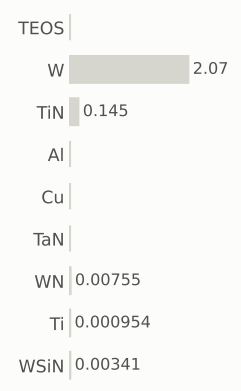

gases emitted (g)



Step #20952.8859: HAR_etch

etch_noop · HAR_etch

1.04	2,224.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

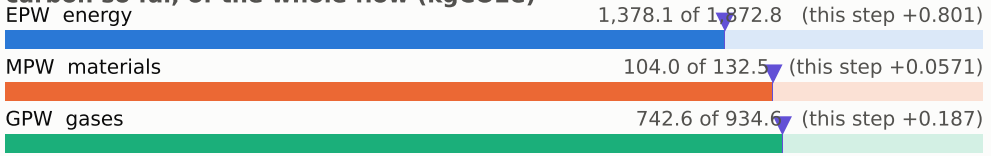

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

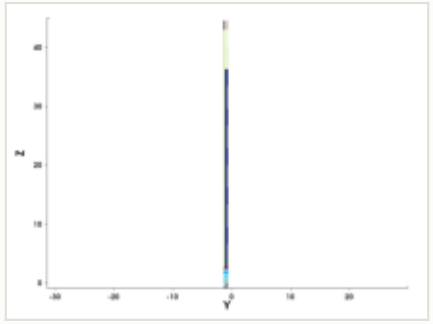

y cut at -1.035 µm

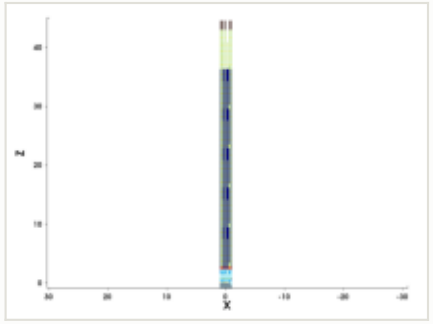

mask for this step

no mask for this step

steps by process area

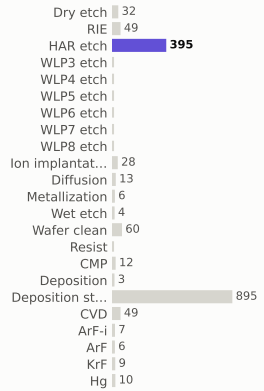

materials deposited (g)

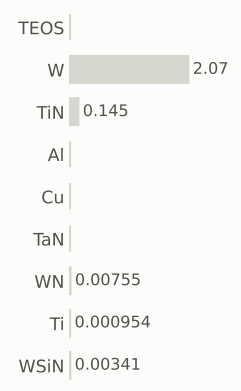

gases emitted (g)



Step #20952.953: HAR_etch

etch_noop · HAR_etch

1.04	2,225.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

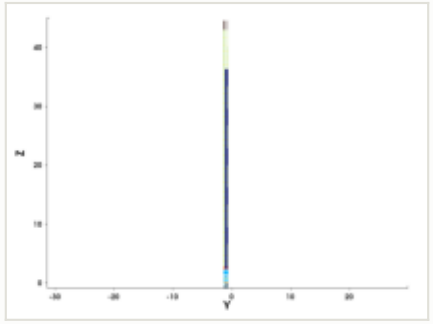

y cut at -1.035 µm

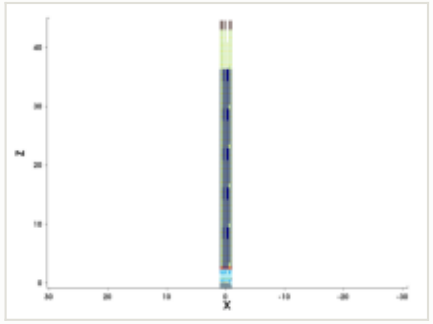

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

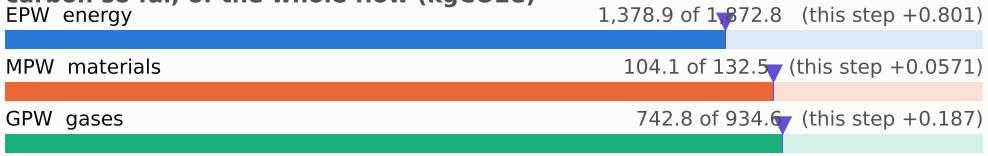

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

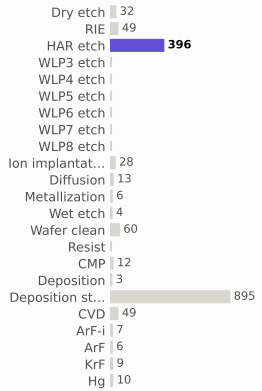

materials deposited (g)

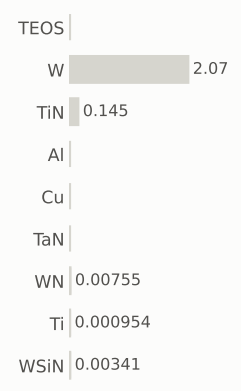

gases emitted (g)



Step #20953.0201: HAR_etch

etch_noop · HAR_etch

1.04	2,226.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

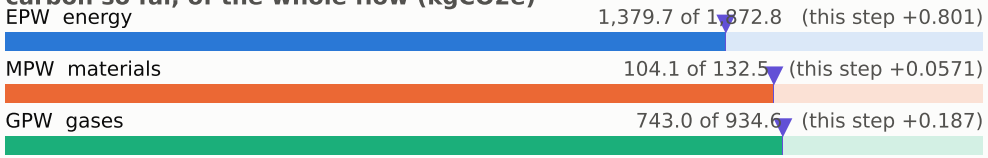

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

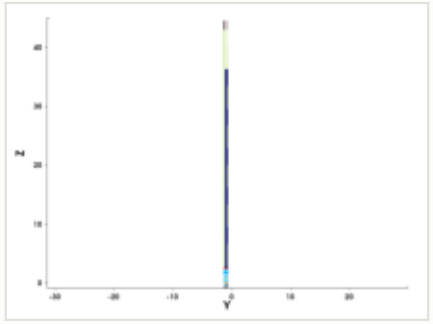

y cut at -1.035 µm

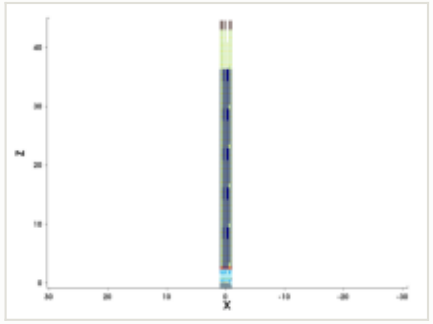

mask for this step

no mask for this step

steps by process area

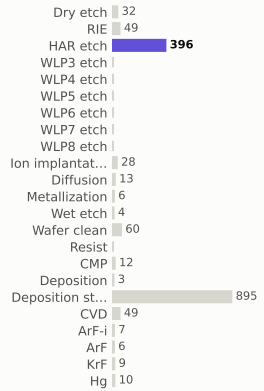

materials deposited (g)

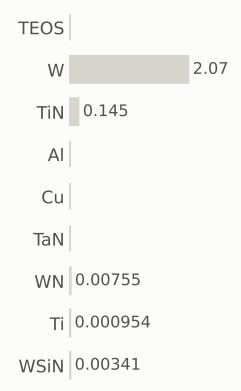

gases emitted (g)



Step #20953.0872: HAR_etch

etch_noop · HAR_etch

1.04	2,227.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

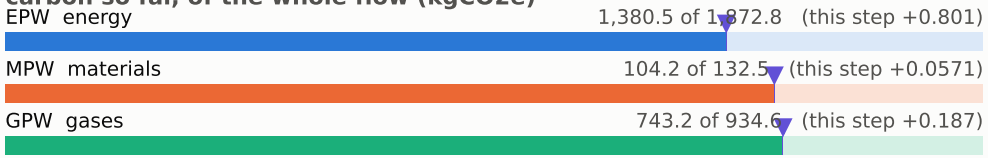

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

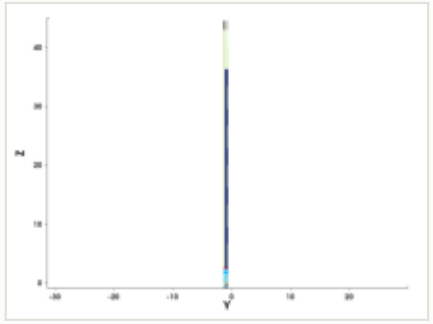

y cut at -1.035 µm

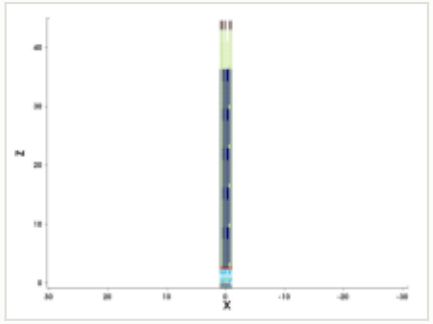

mask for this step

no mask for this step

steps by process area

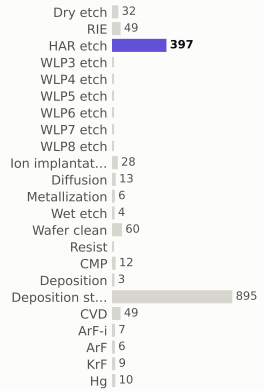

materials deposited (g)

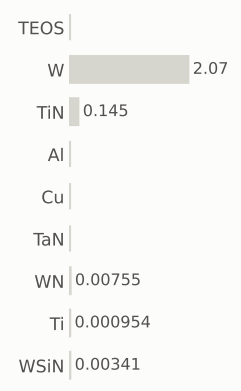

gases emitted (g)



Step #20953.1544: HAR_etch

etch_noop · HAR_etch

1.04	2,229.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

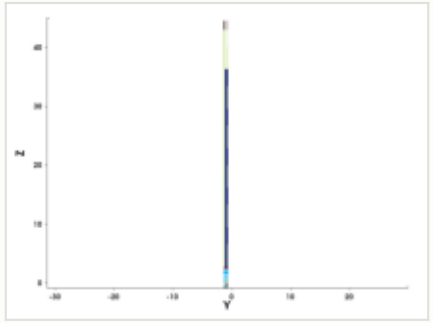

y cut at -1.035 µm

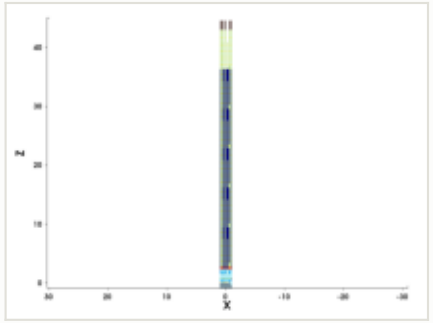

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

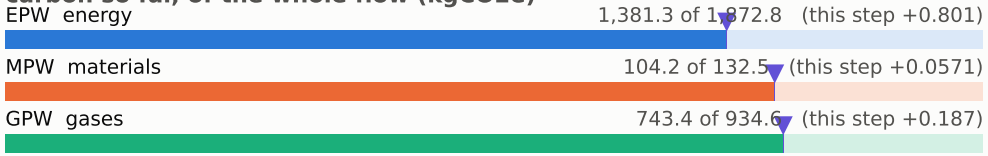

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

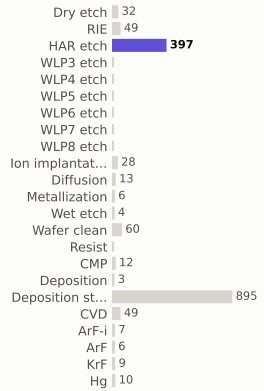

materials deposited (g)

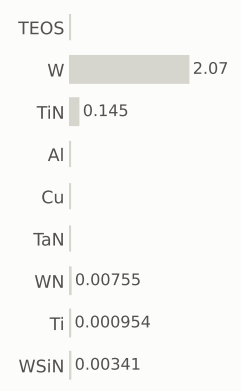

gases emitted (g)



Step #20953.2215: HAR_etch

etch_noop · HAR_etch

1.04	2,230.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

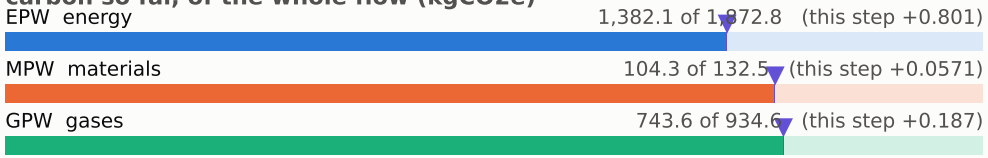

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

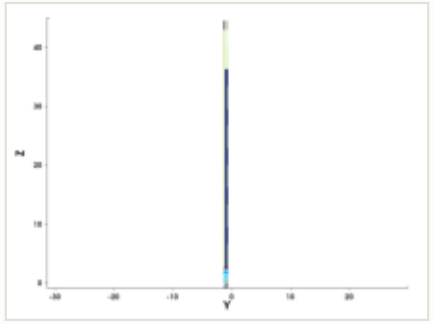

y cut at -1.035 µm

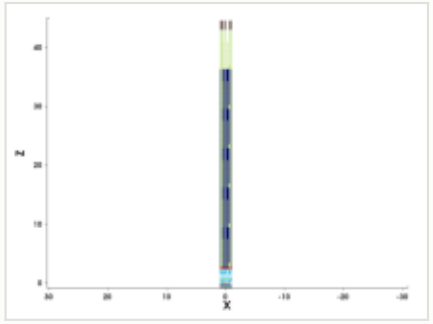

mask for this step

no mask for this step

steps by process area

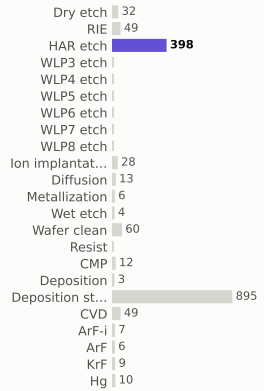

materials deposited (g)

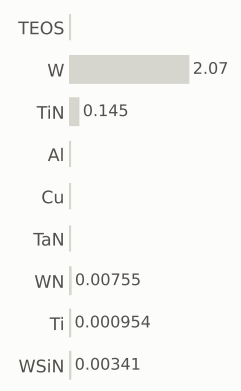

gases emitted (g)



Step #20953.2886: HAR_etch

etch_noop · HAR_etch

1.04	2,231.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

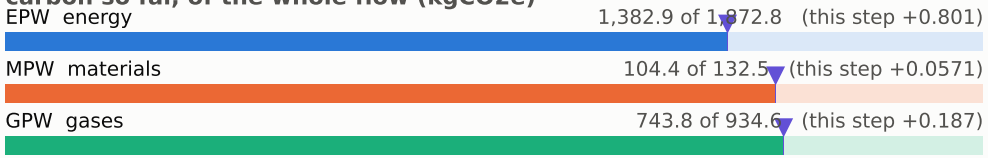

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

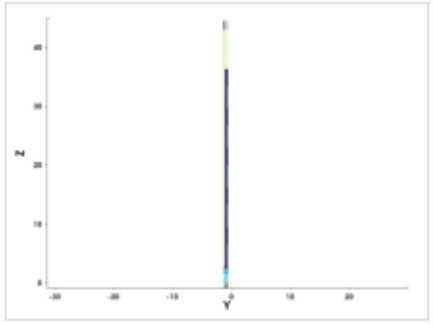

y cut at -1.035 µm

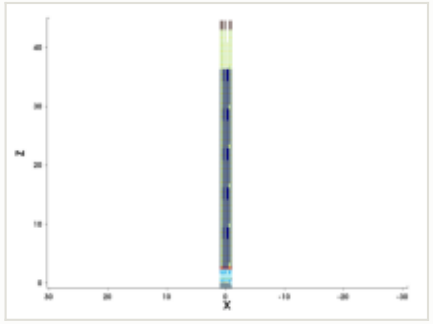

mask for this step

no mask for this step

steps by process area

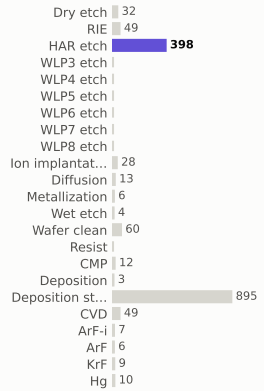

materials deposited (g)

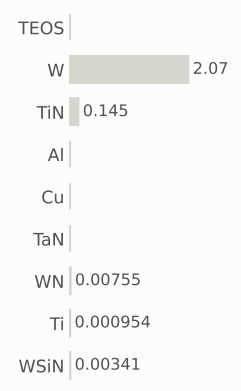

gases emitted (g)



Step #20953.3557: HAR_etch

etch_noop · HAR_etch

1.04	2,232.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

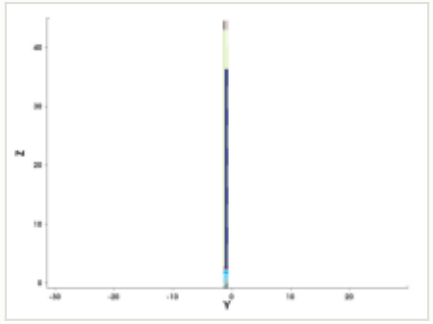

y cut at -1.035 µm

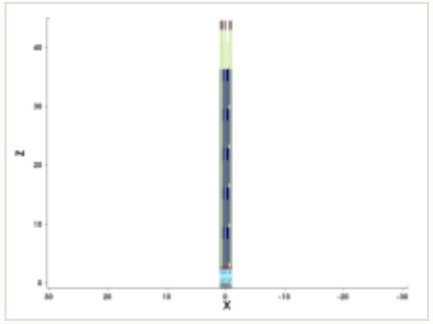

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

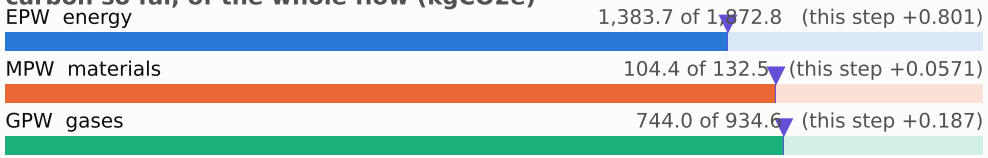

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

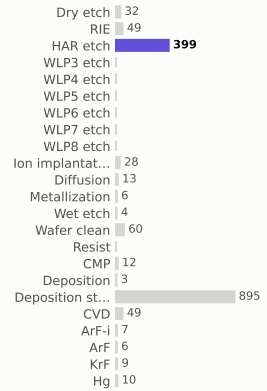

materials deposited (g)

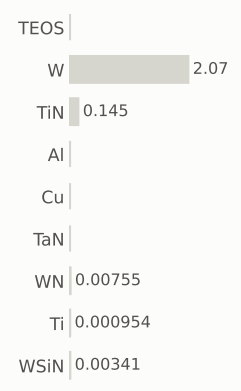

gases emitted (g)



Step #20953.4228: HAR_etch

etch_noop · HAR_etch

1.04	2,233.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

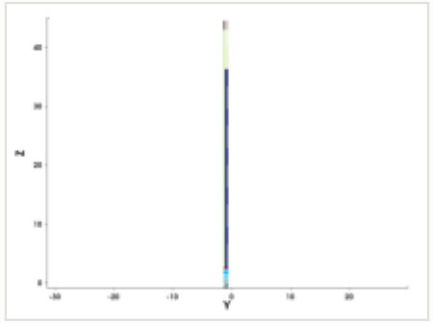

y cut at -1.035 µm

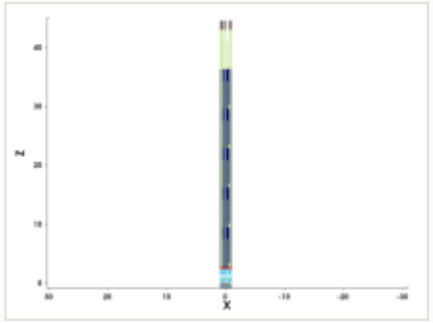

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

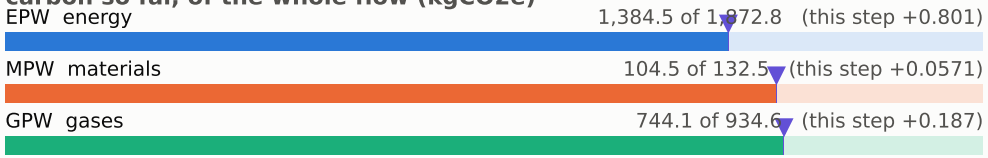

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

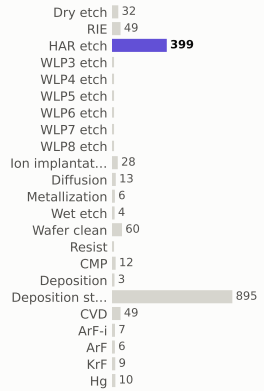

materials deposited (g)

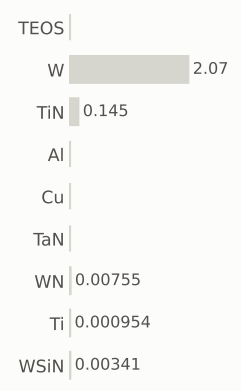

gases emitted (g)



Step #20953.4899: HAR_etch

etch_noop · HAR_etch

1.04	2,234.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

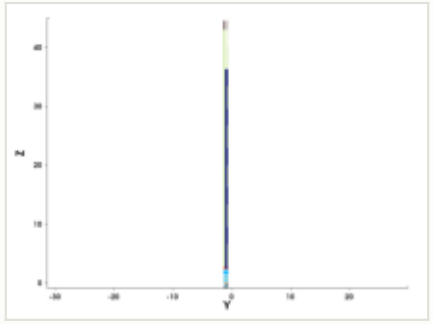

y cut at -1.035 µm

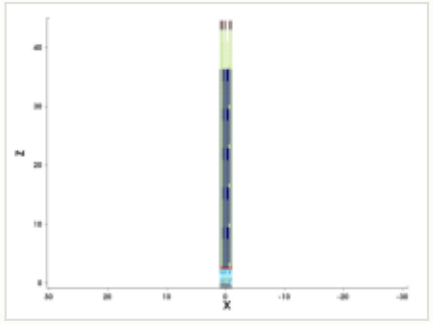

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

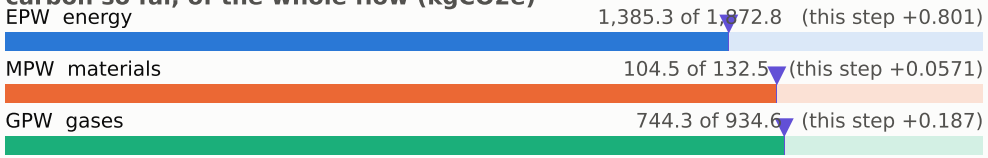

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

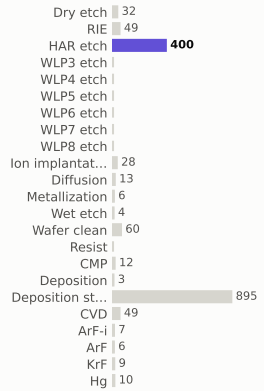

materials deposited (g)

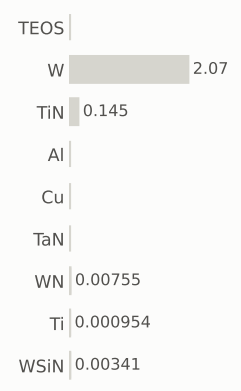

gases emitted (g)



Step #20953.557: HAR_etch

etch_noop · HAR_etch

1.04	2,235.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

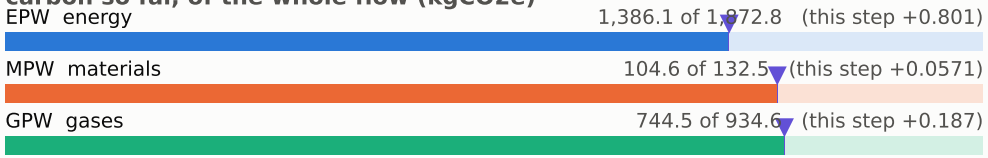

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

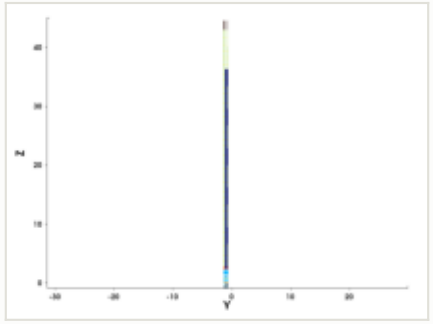

y cut at -1.035 µm

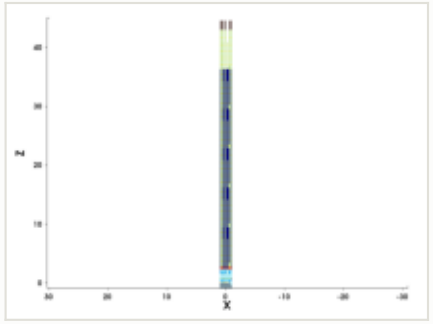

mask for this step

no mask for this step

steps by process area

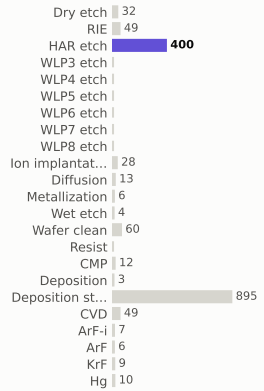

materials deposited (g)

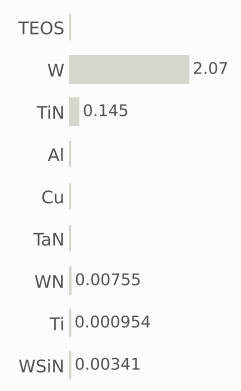

gases emitted (g)



Step #20953.6242: HAR_etch

etch_noop · HAR_etch

1.04	2,236.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

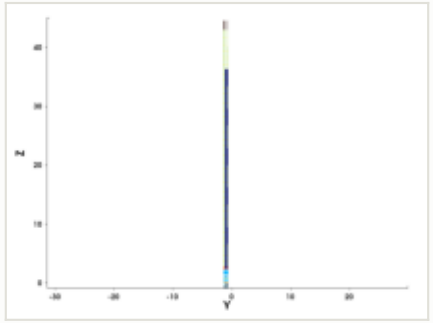

y cut at -1.035 µm

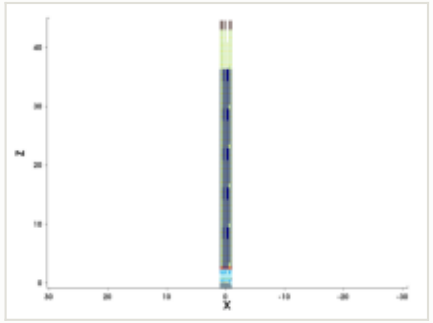

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

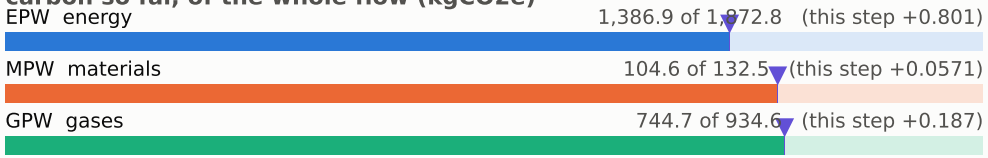

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

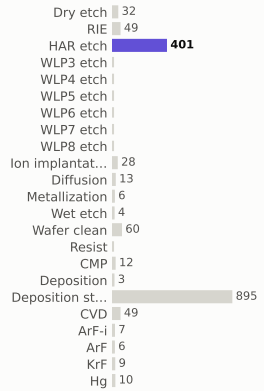

materials deposited (g)

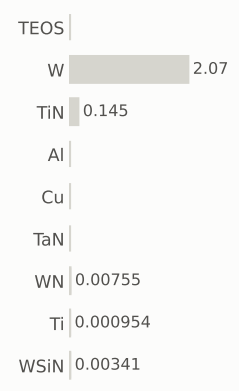

gases emitted (g)



Step #20953.6913: HAR_etch

etch_noop · HAR_etch

1.04	2,237.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

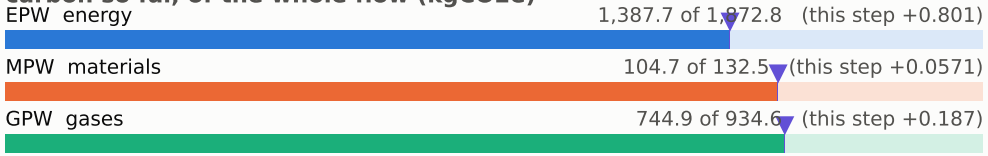

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

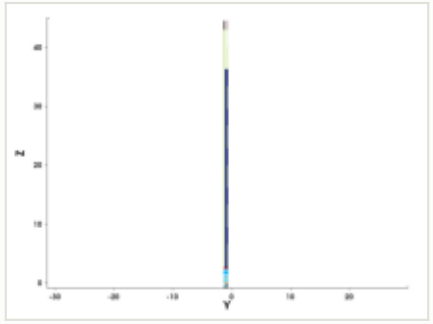

y cut at -1.035 µm

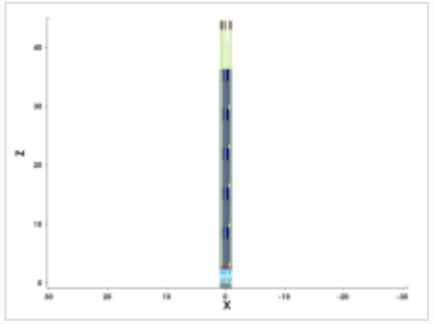

mask for this step

no mask for this step

steps by process area

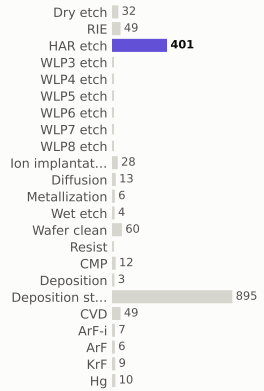

materials deposited (g)

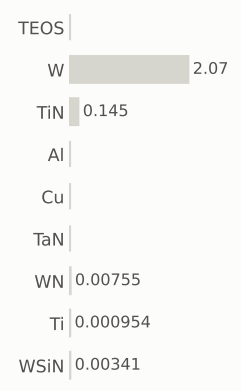

gases emitted (g)



Step #20953.7584: HAR_etch

etch_noop · HAR_etch

1.04	2,238.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

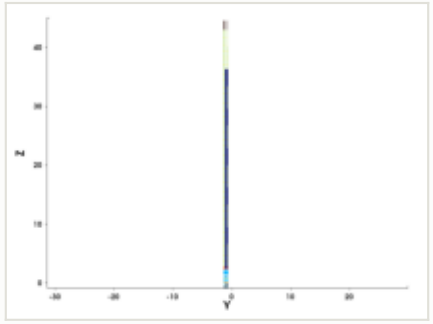

y cut at -1.035 µm

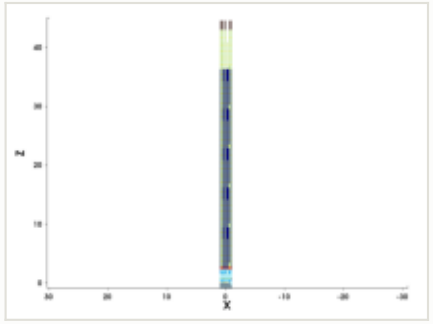

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

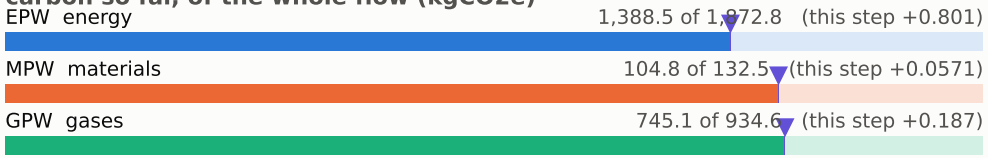

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

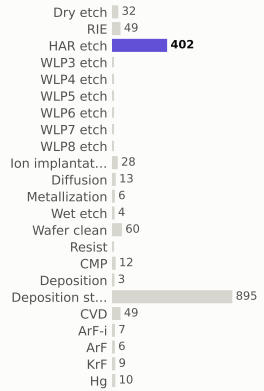

materials deposited (g)

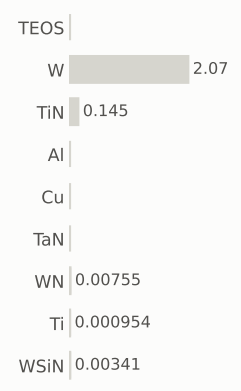

gases emitted (g)



Step #20953.8255: HAR_etch

etch_noop · HAR_etch

1.04	2,239.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

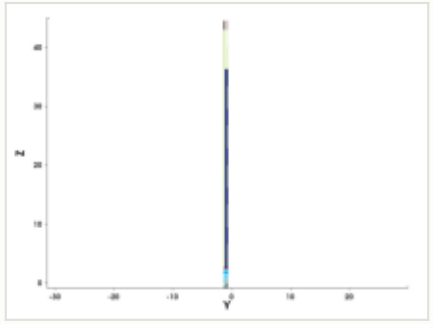

y cut at -1.035 µm

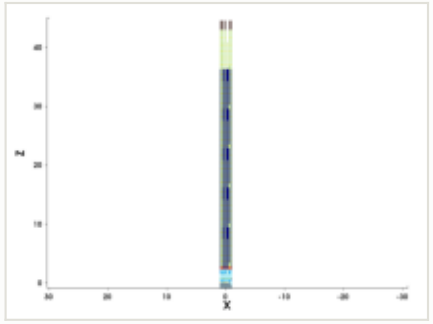

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

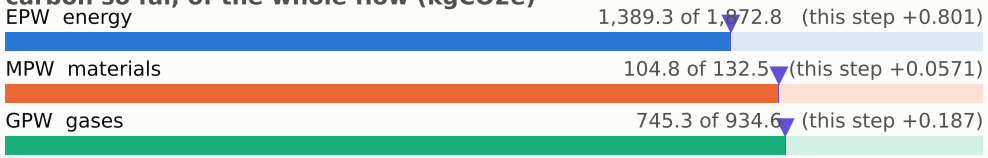

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

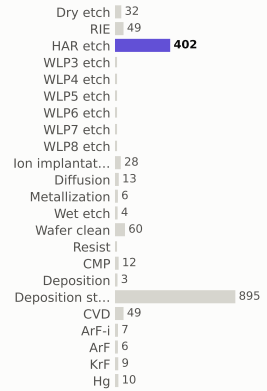

materials deposited (g)

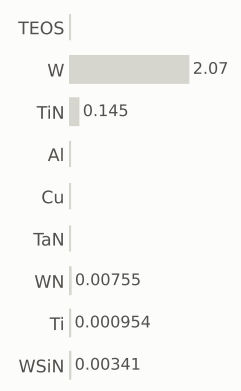

gases emitted (g)



Step #20953.8926: HAR_etch

etch_noop · HAR_etch

1.04	2,240.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

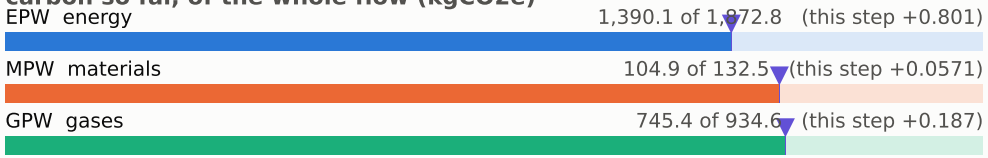

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

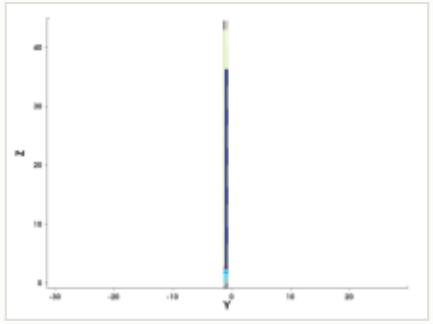

y cut at -1.035 µm

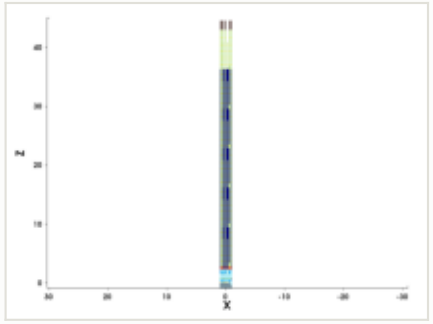

mask for this step

no mask for this step

steps by process area

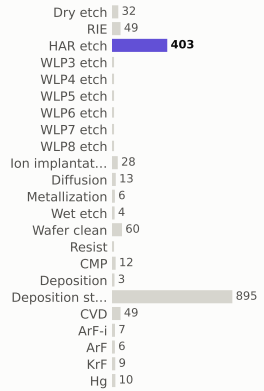

materials deposited (g)

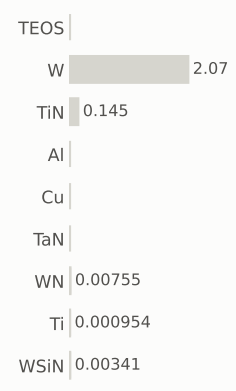

gases emitted (g)



Step #20953.9597: HAR_etch

etch_noop · HAR_etch

1.04	2,241.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

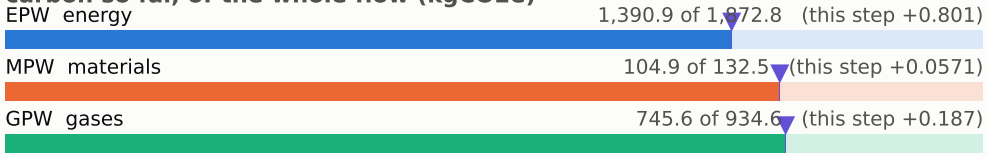

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

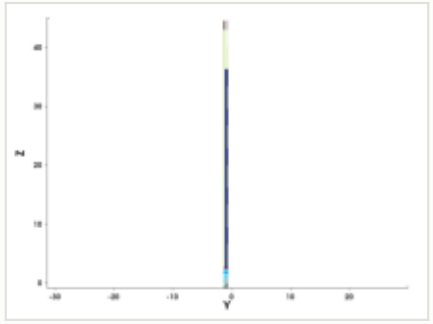

y cut at -1.035 µm

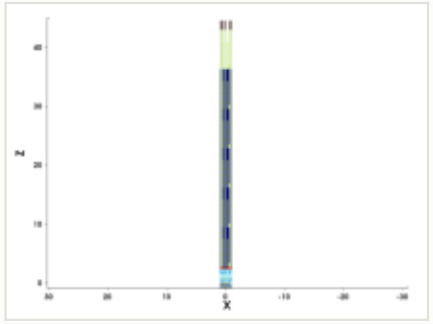

mask for this step

no mask for this step

steps by process area

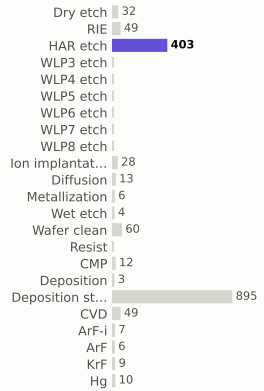

materials deposited (g)

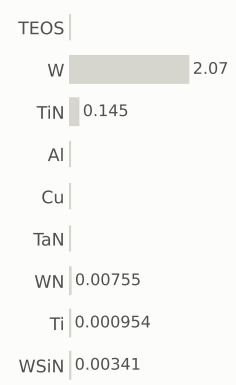

gases emitted (g)



Step #20954.0268: HAR_etch

etch_noop · HAR_etch

1.04	2,242.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

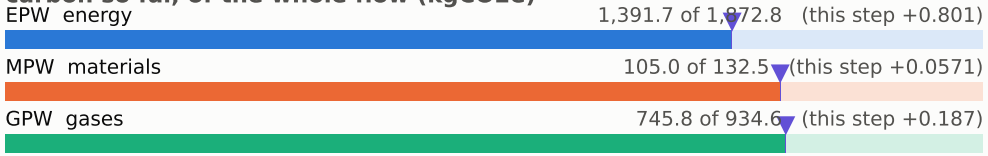

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

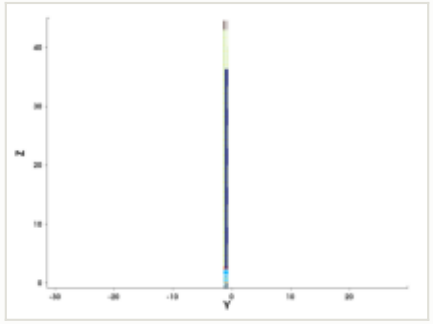

y cut at -1.035 µm

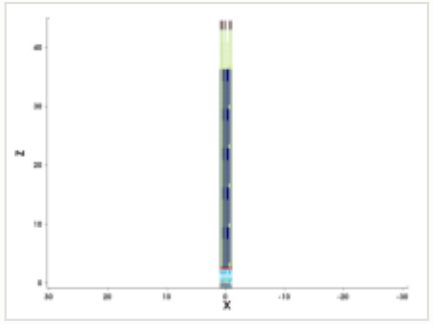

mask for this step

no mask for this step

steps by process area

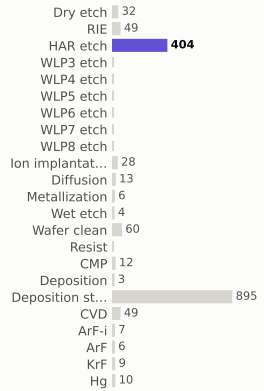

materials deposited (g)

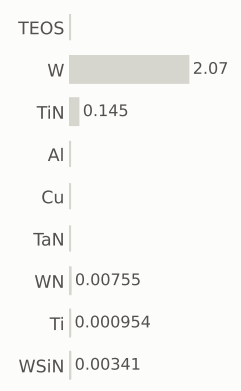

gases emitted (g)



Step #20954.094: HAR_etch

etch_noop · HAR_etch

1.04	2,243.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

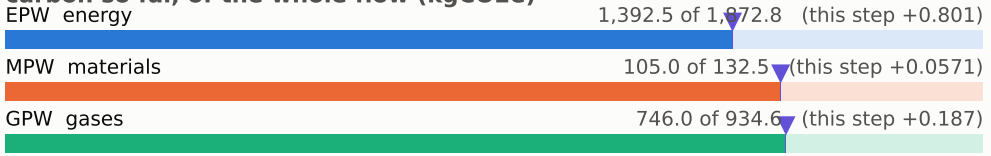

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

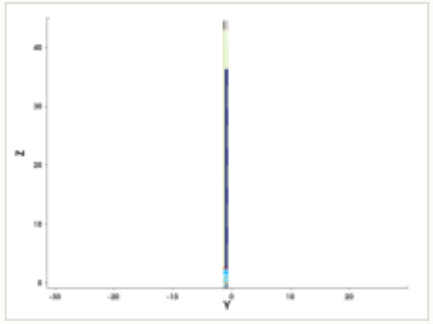

y cut at -1.035 µm

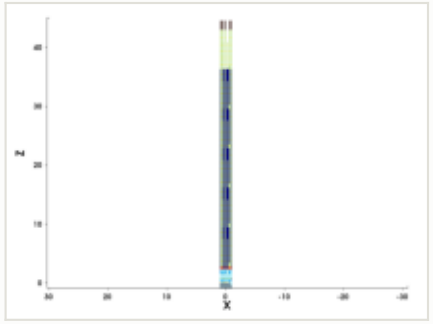

mask for this step

no mask for this step

steps by process area

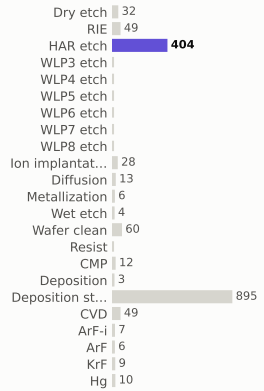

materials deposited (g)

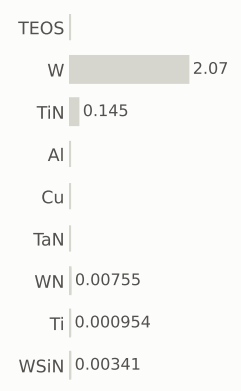

gases emitted (g)



Step #20954.1611: HAR_etch

etch_noop · HAR_etch

1.04	2,244.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

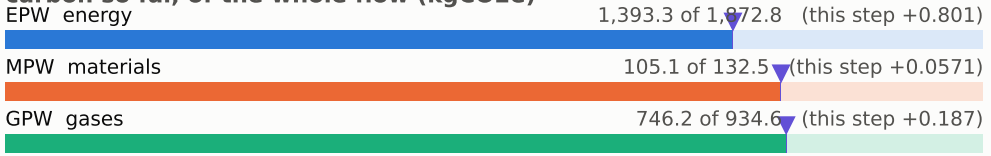

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

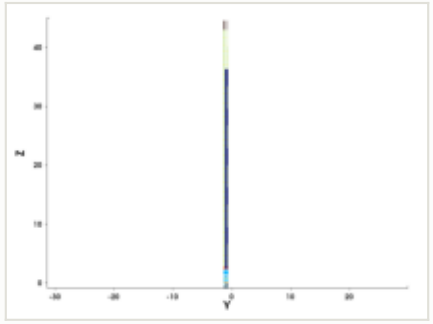

y cut at -1.035 µm

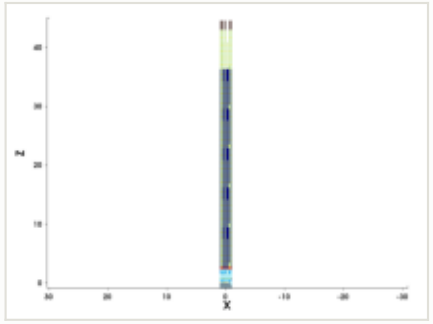

mask for this step

no mask for this step

steps by process area

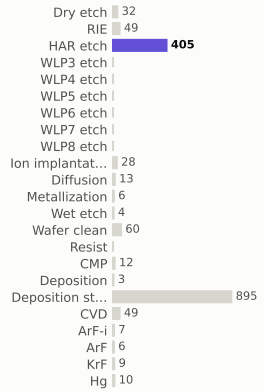

materials deposited (g)

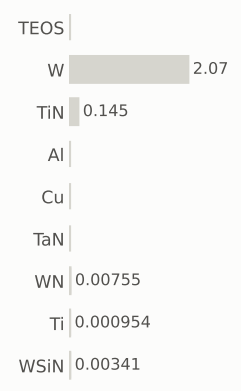

gases emitted (g)



Step #20954.2282: HAR_etch

etch_noop · HAR_etch

1.04	2,245.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

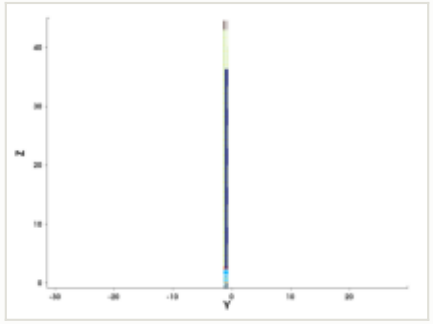

y cut at -1.035 µm

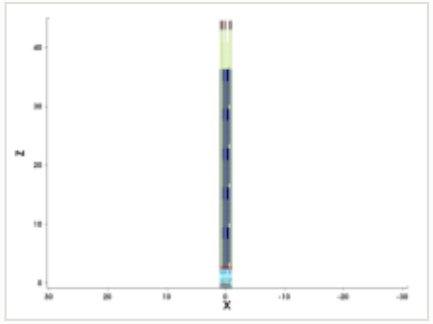

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

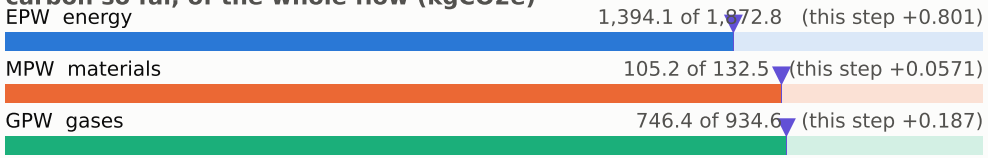

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

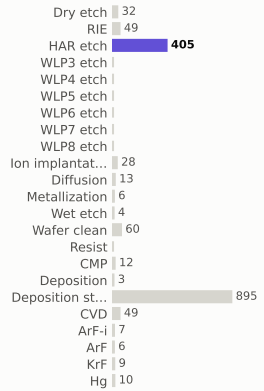

materials deposited (g)

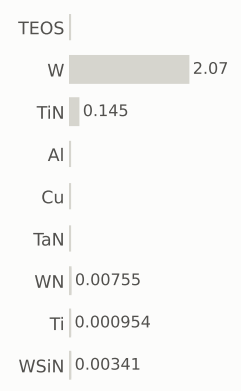

gases emitted (g)



Step #20954.2953: HAR_etch

etch_noop · HAR_etch

1.04	2,246.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

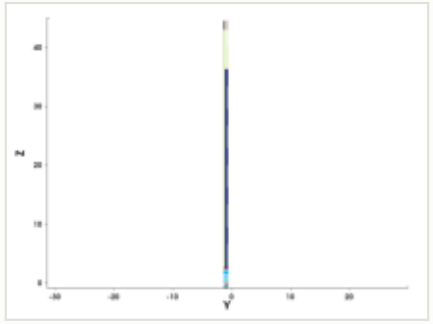

y cut at -1.035 µm

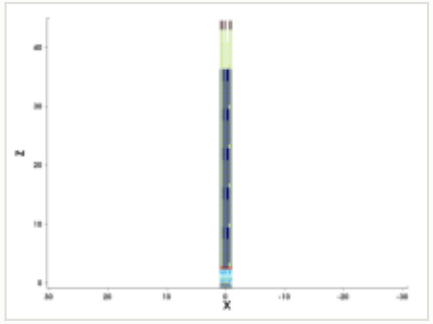

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

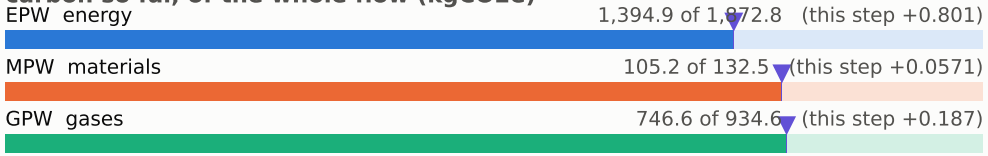

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

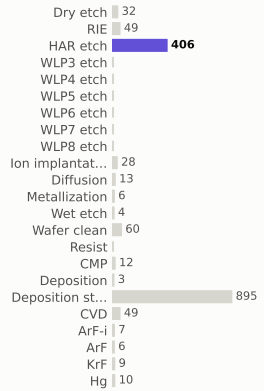

materials deposited (g)

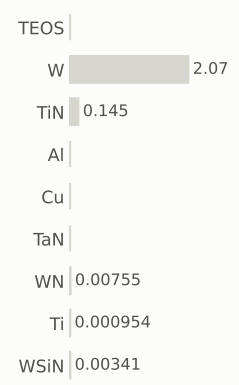

gases emitted (g)



Step #20954.3624: HAR_etch

etch_noop · HAR_etch

1.04	2,247.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

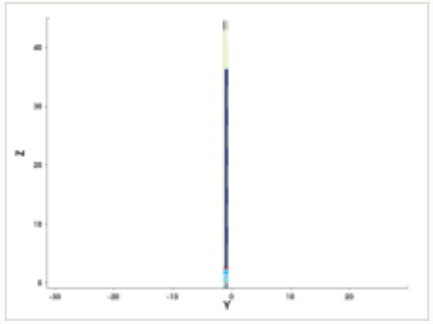

y cut at -1.035 µm

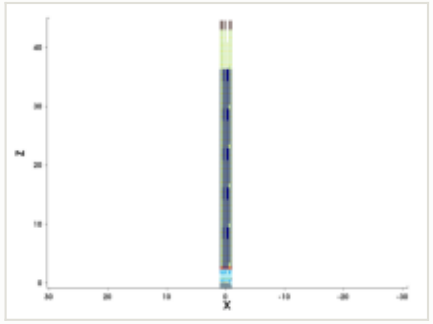

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

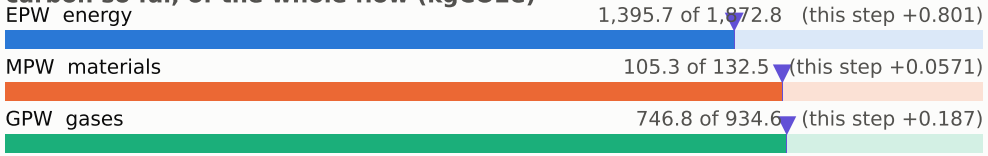

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

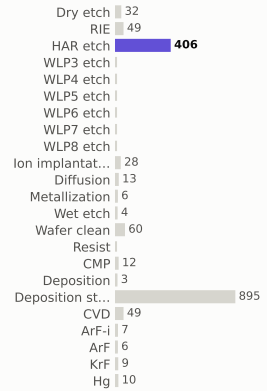

materials deposited (g)

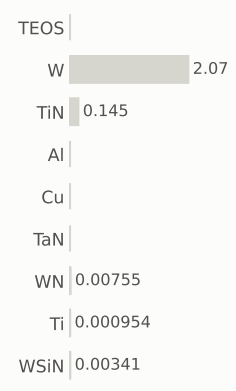

gases emitted (g)

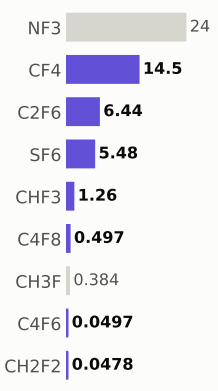

Step #20954.4295: HAR_etch

etch_noop · HAR_etch

1.04	2,248.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

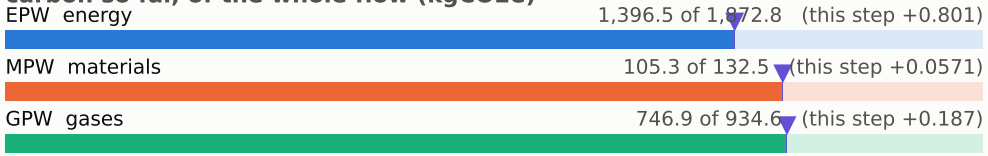

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

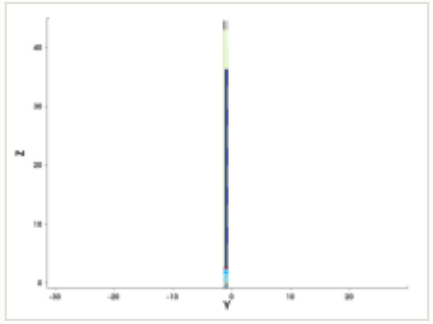

y cut at -1.035 µm

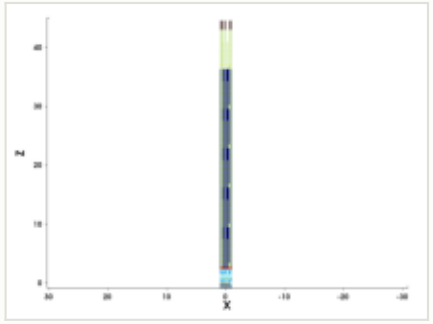

mask for this step

no mask for this step

steps by process area

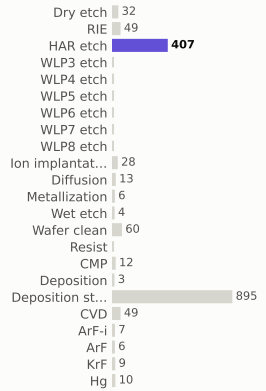

materials deposited (g)

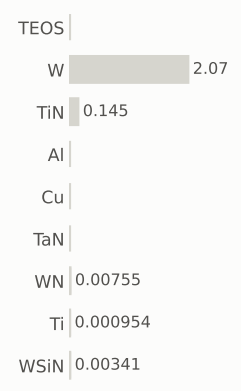

gases emitted (g)



Step #20954.4966: HAR_etch

etch_noop · HAR_etch

1.04	2,249.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

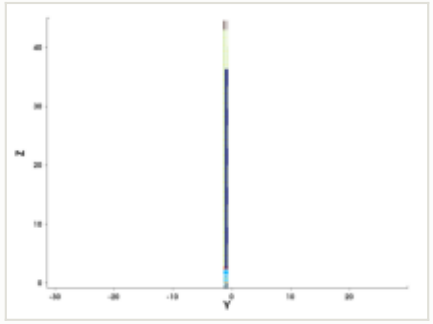

y cut at -1.035 µm

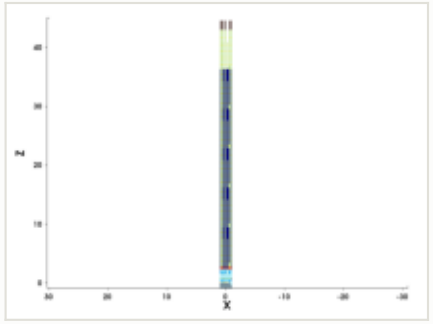

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

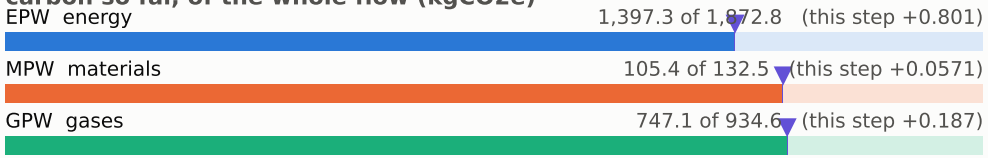

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

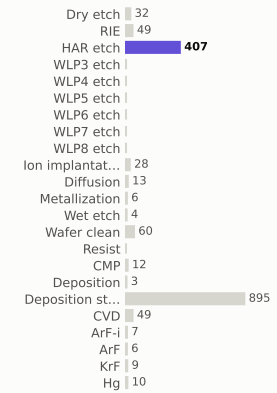

materials deposited (g)

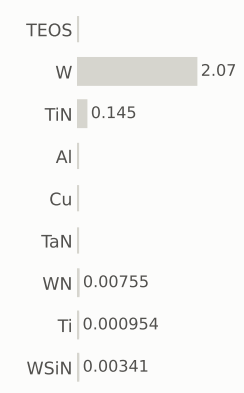

gases emitted (g)



Step #20954.5638: HAR_etch

etch_noop · HAR_etch

1.04	2,250.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

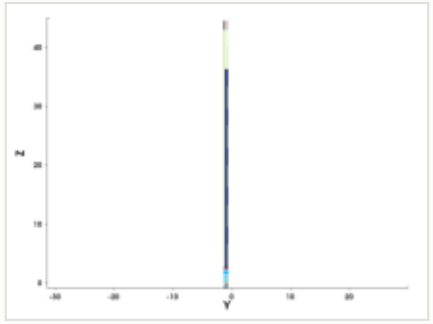

y cut at -1.035 µm

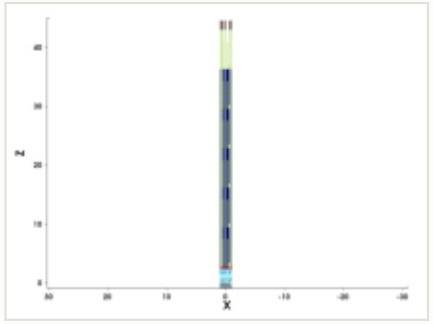

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

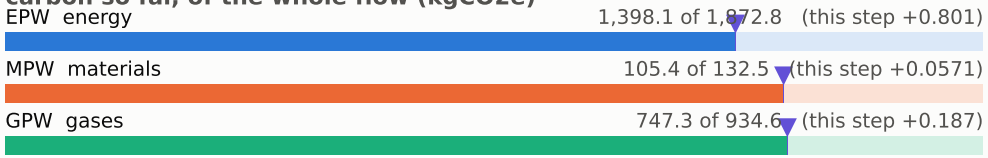

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

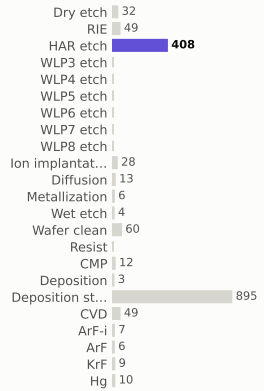

materials deposited (g)

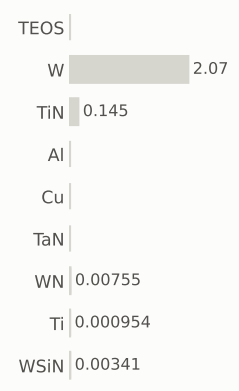

gases emitted (g)



Step #20954.6309: HAR_etch

etch_noop · HAR_etch

1.04	2,251.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

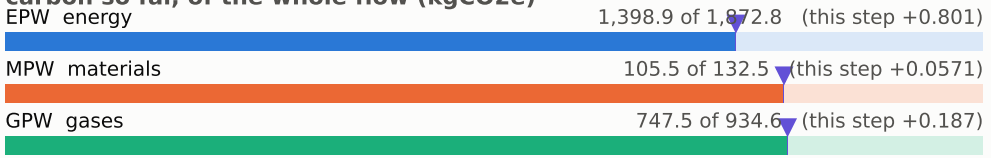

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

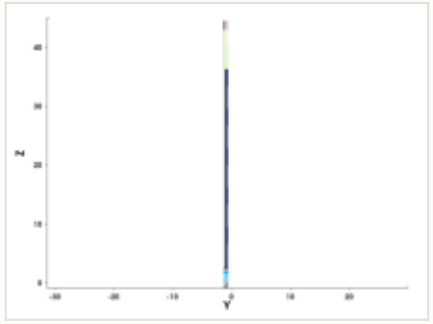

y cut at -1.035 µm

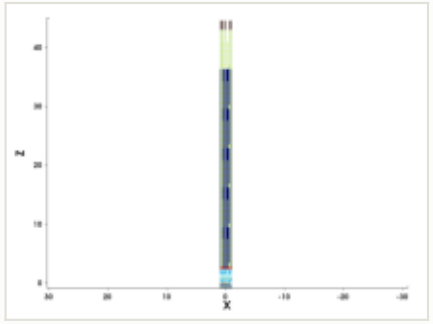

mask for this step

no mask for this step

steps by process area

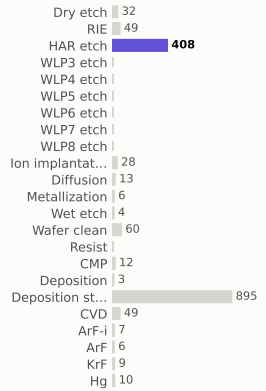

materials deposited (g)

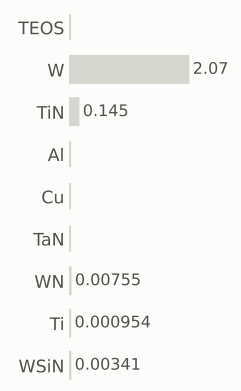

gases emitted (g)



Step #20954.698: HAR_etch

etch_noop · HAR_etch

1.04	2,253.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

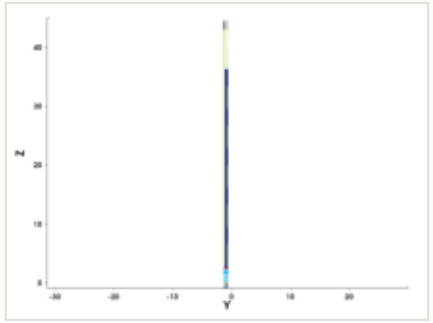

y cut at -1.035 µm

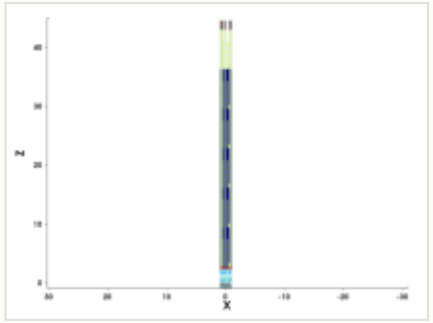

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

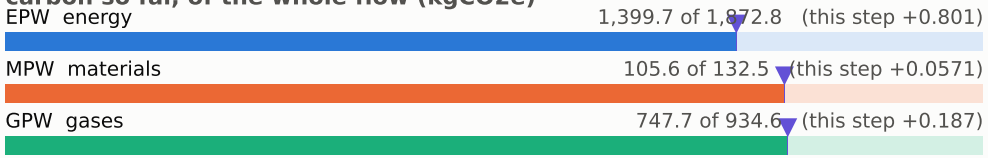

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

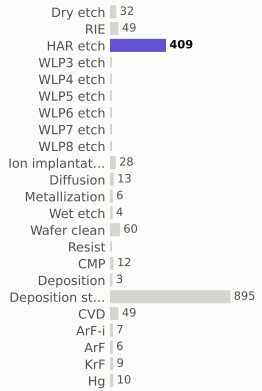

materials deposited (g)

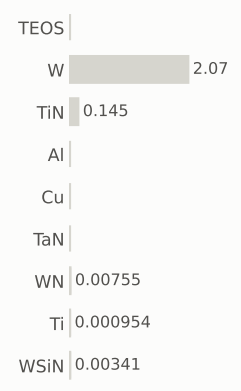

gases emitted (g)



Step #20954.7651: HAR_etch

etch_noop · HAR_etch

1.04	2,254.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

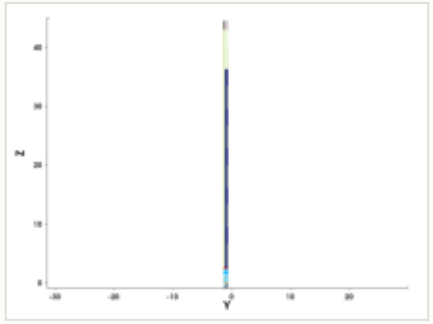

y cut at -1.035 µm

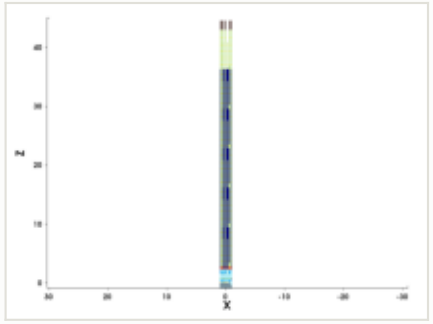

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

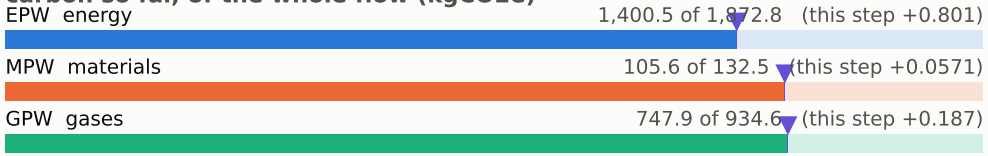

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

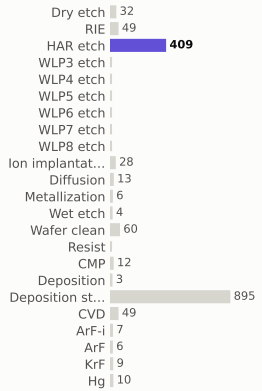

materials deposited (g)

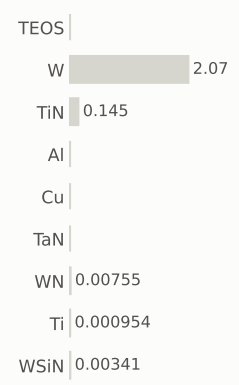

gases emitted (g)



Step #20954.8322: HAR_etch

etch_noop · HAR_etch

1.04	2,255.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

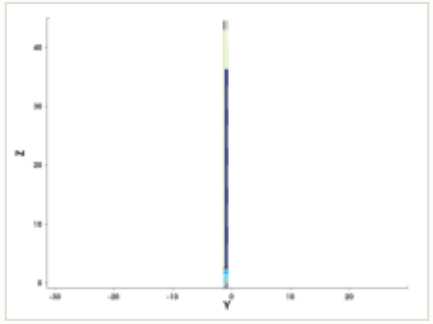

y cut at -1.035 µm

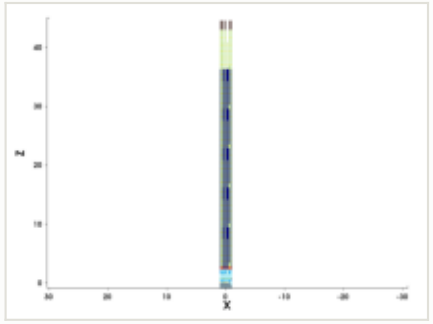

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

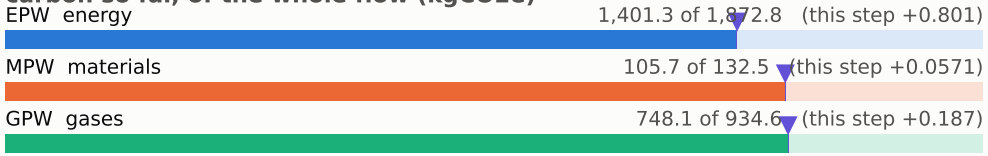

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

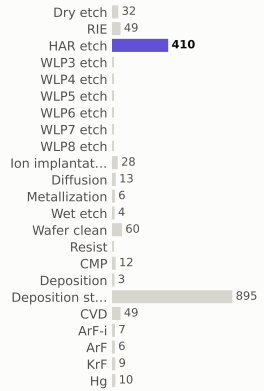

materials deposited (g)

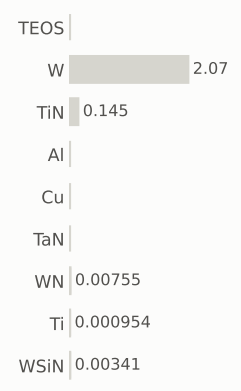

gases emitted (g)

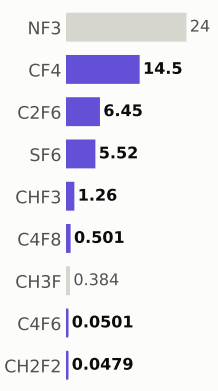

Step #20954.8993: HAR_etch

etch_noop · HAR_etch

1.04	2,256.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

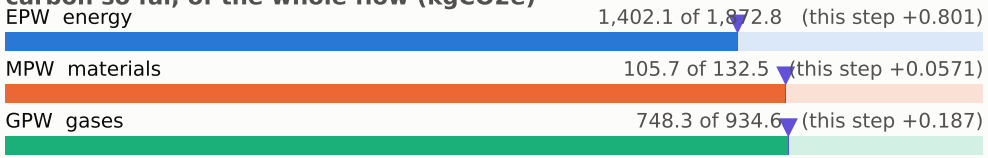

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

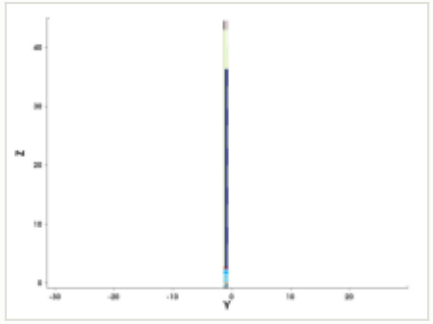

y cut at -1.035 µm

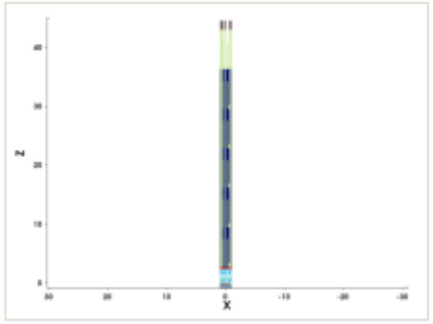

mask for this step

no mask for this step

steps by process area

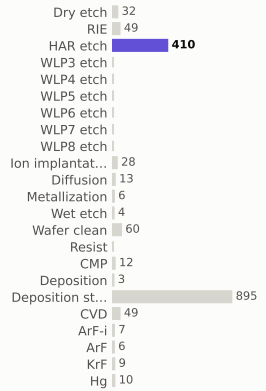

materials deposited (g)

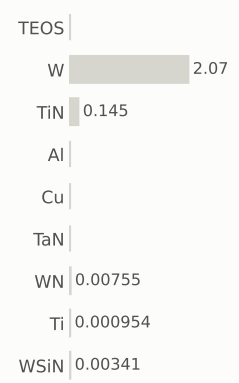

gases emitted (g)



Step #20954.9664: HAR_etch

etch_noop · HAR_etch

1.04	2,257.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

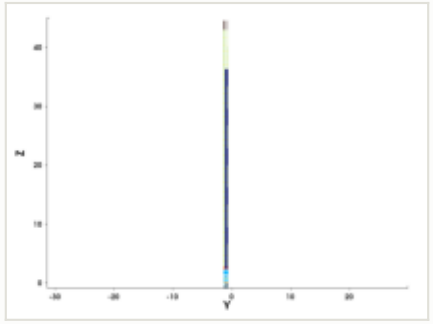

y cut at -1.035 µm

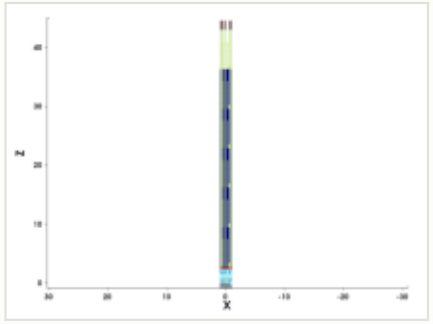

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

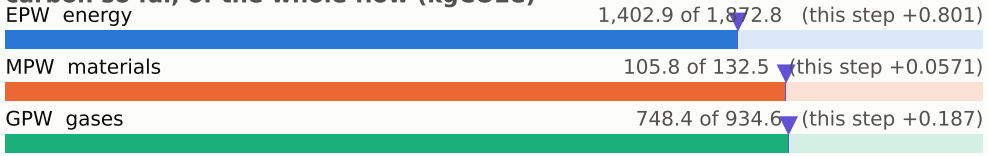

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

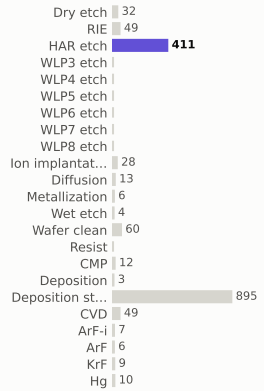

materials deposited (g)

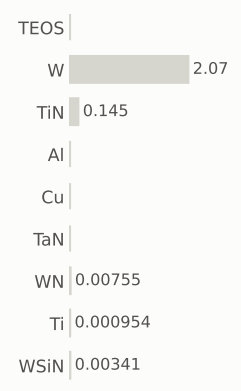

gases emitted (g)



Step #20955.0336: HAR_etch

etch_noop · HAR_etch

1.04	2,258.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

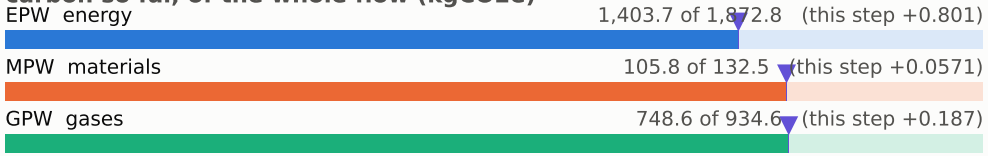

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

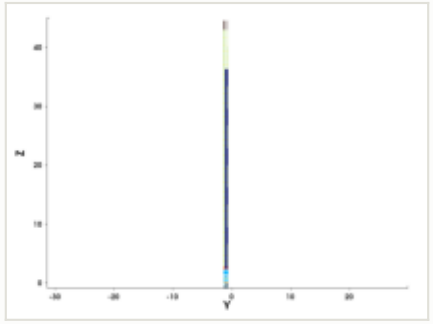

y cut at -1.035 µm

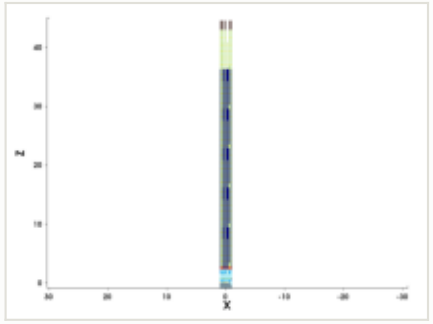

mask for this step

no mask for this step

steps by process area

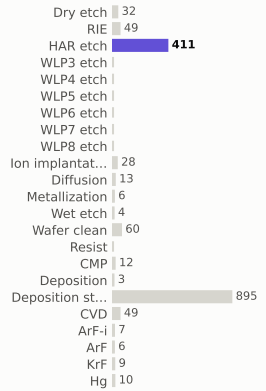

materials deposited (g)

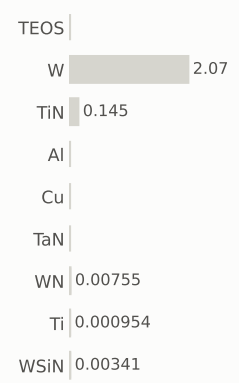

gases emitted (g)



Step #20955.1007: HAR_etch

etch_noop · HAR_etch

1.04	2,259.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

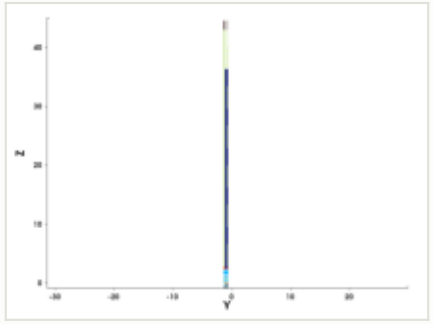

y cut at -1.035 µm

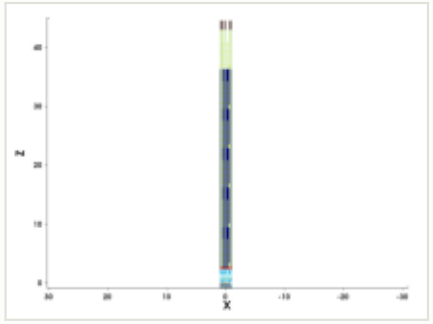

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

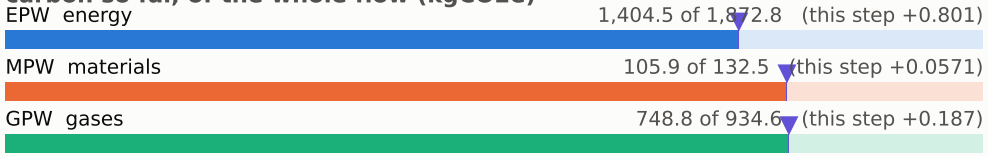

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

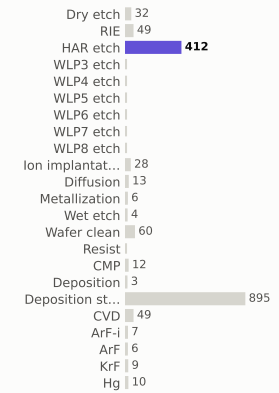

materials deposited (g)



gases emitted (g)



Step #20955.1678: HAR_etch

etch_noop · HAR_etch

1.04	2,260.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

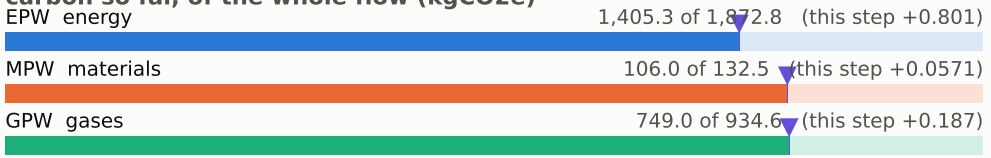

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

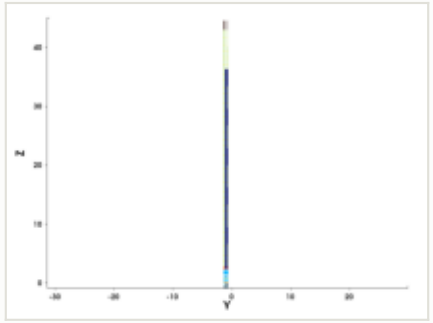

y cut at -1.035 µm

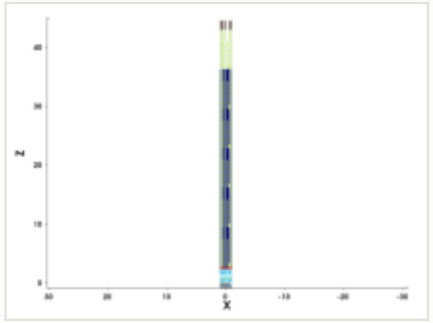

mask for this step

no mask for this step

steps by process area

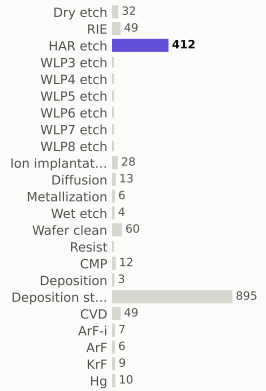

materials deposited (g)

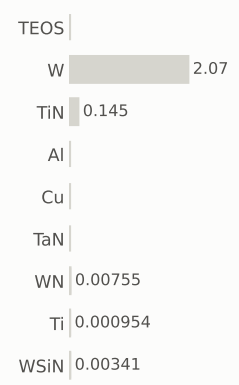

gases emitted (g)



Step #20955.2349: HAR_etch

etch_noop · HAR_etch

1.04	2,261.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

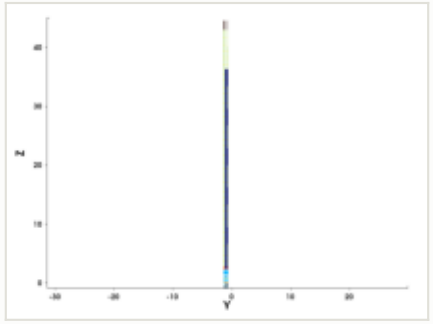

y cut at -1.035 µm

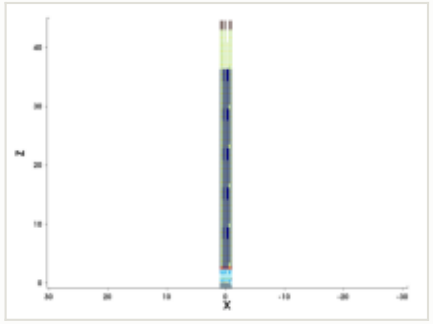

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

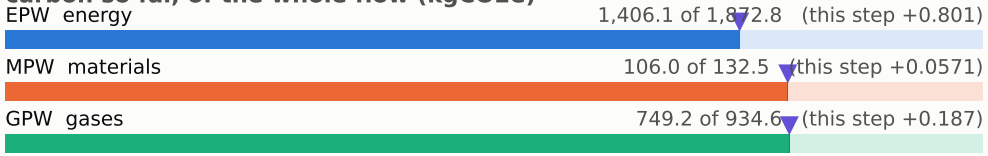

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

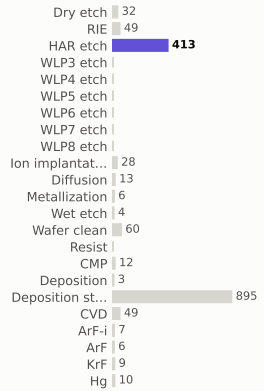

materials deposited (g)

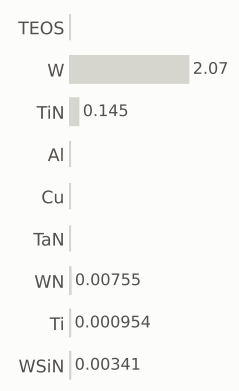

gases emitted (g)



Step #20955.302: HAR_etch

etch_noop · HAR_etch

1.04	2,262.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

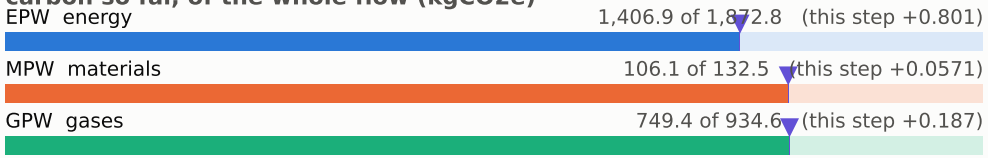

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

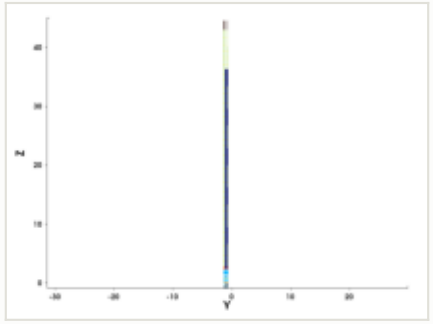

y cut at -1.035 µm

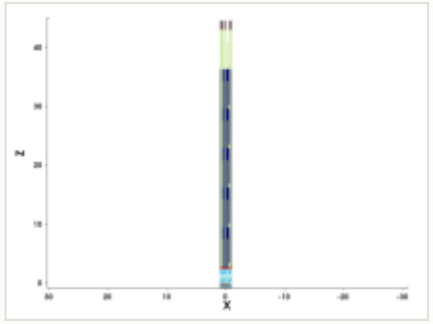

mask for this step

no mask for this step

steps by process area

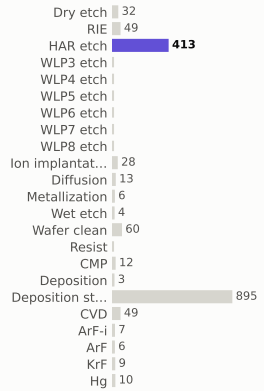

materials deposited (g)

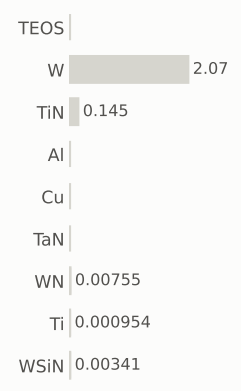

gases emitted (g)

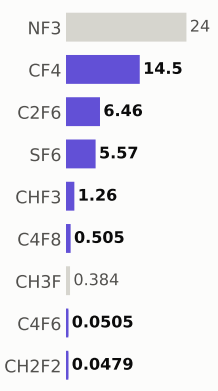

Step #20955.3691: HAR_etch

etch_noop · HAR_etch

1.04	2,263.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

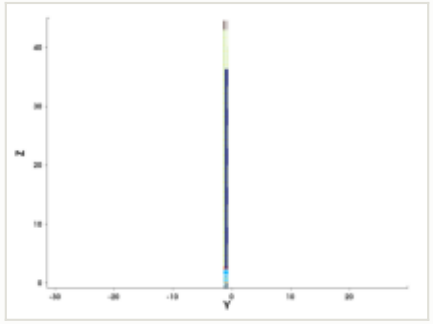

y cut at -1.035 µm

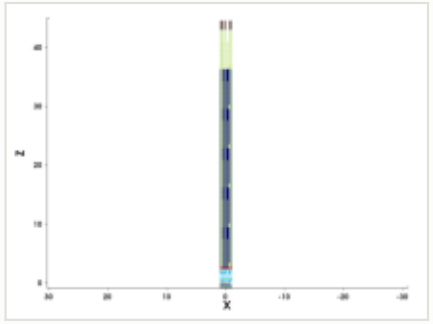

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

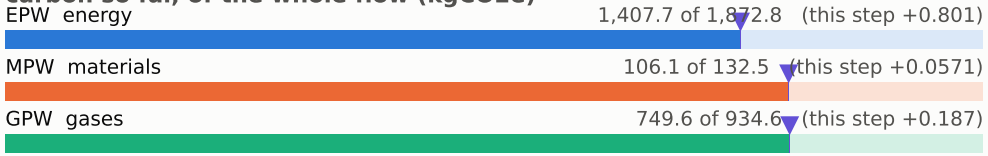

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

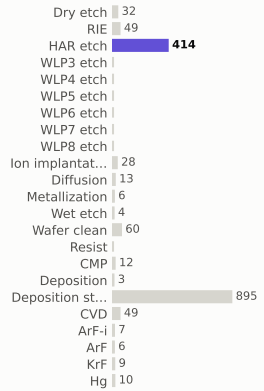

materials deposited (g)

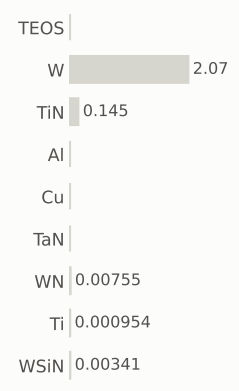

gases emitted (g)



Step #20955.4362: HAR_etch

etch_noop · HAR_etch

1.04	2,264.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

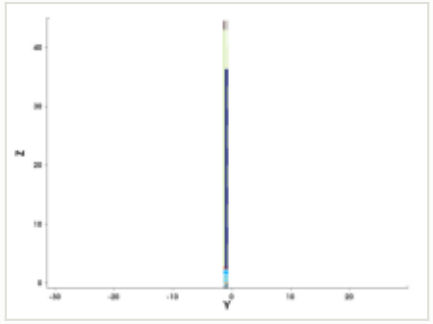

y cut at -1.035 µm

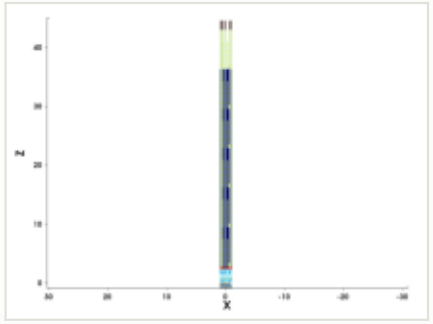

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

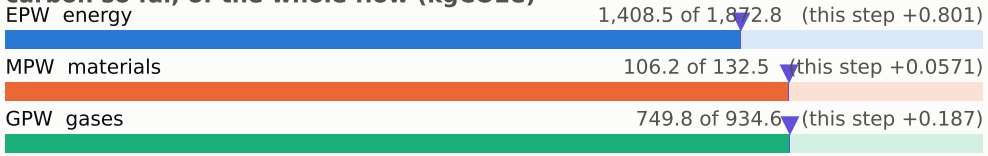

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

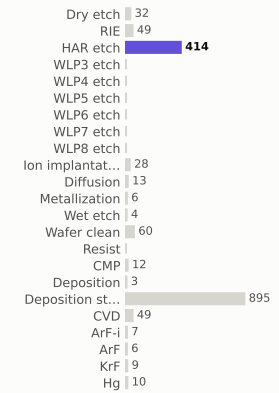

materials deposited (g)

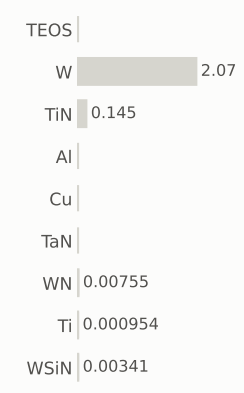

gases emitted (g)



Step #20955.5034: HAR_etch

etch_noop · HAR_etch

1.04	2,265.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

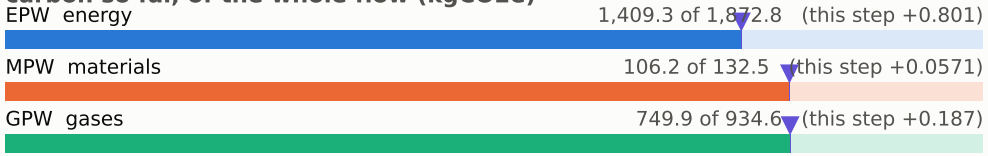

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

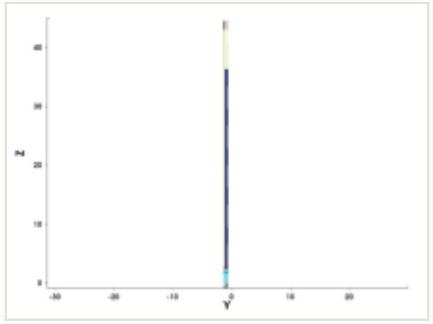

y cut at -1.035 µm

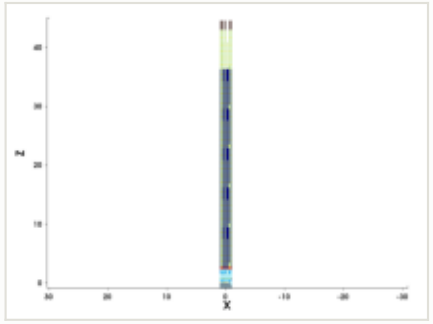

mask for this step

no mask for this step

steps by process area

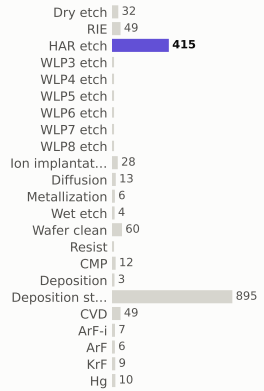

materials deposited (g)

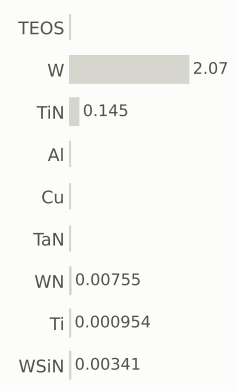

gases emitted (g)



Step #20955.5705: HAR_etch

etch_noop · HAR_etch

1.04	2,266.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

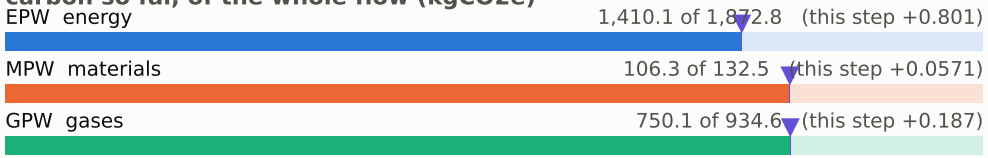

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

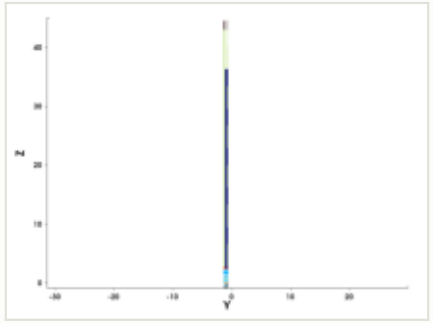

y cut at -1.035 µm

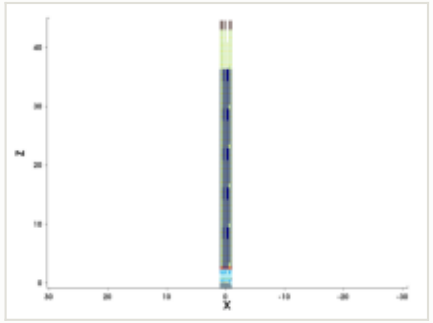

mask for this step

no mask for this step

steps by process area

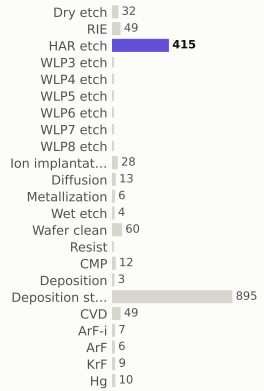

materials deposited (g)

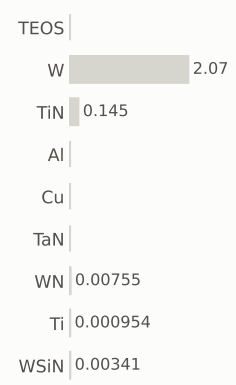

gases emitted (g)



Step #20955.6376: HAR_etch

etch_noop · HAR_etch

1.04	2,267.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

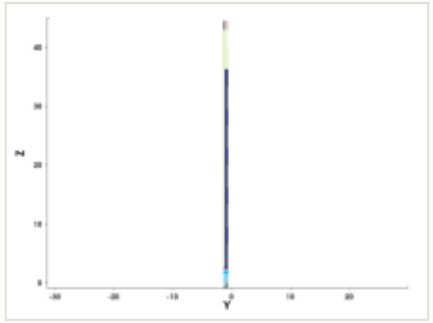

y cut at -1.035 µm

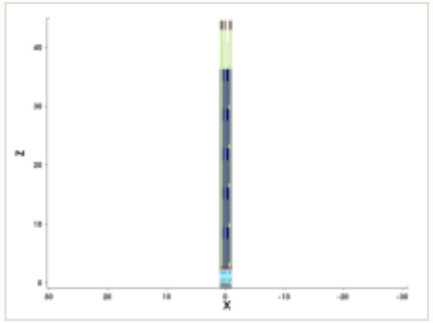

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

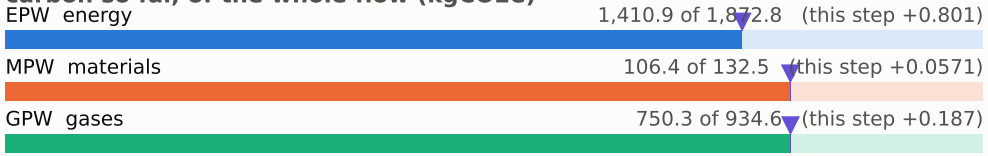

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

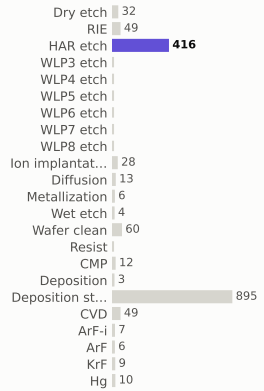

materials deposited (g)

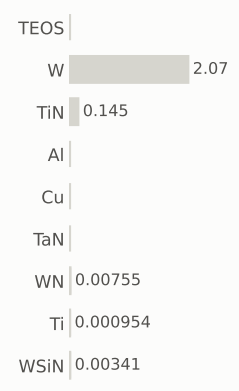

gases emitted (g)



Step #20955.7047: HAR_etch

etch_noop · HAR_etch

1.04	2,268.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

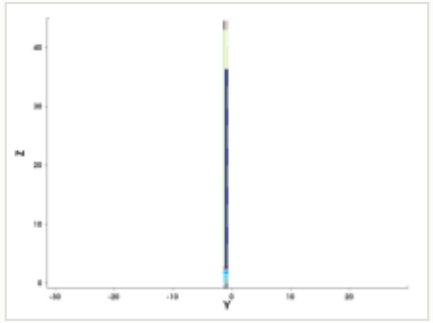

y cut at -1.035 µm

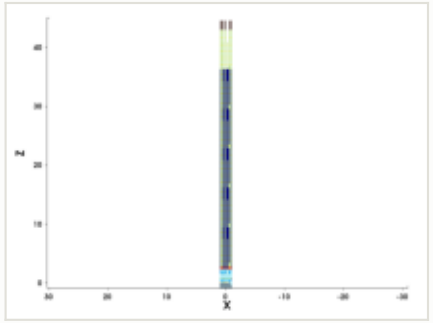

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

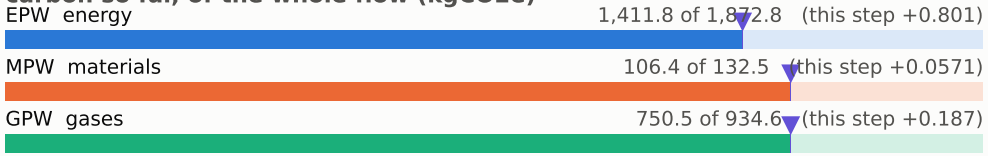

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

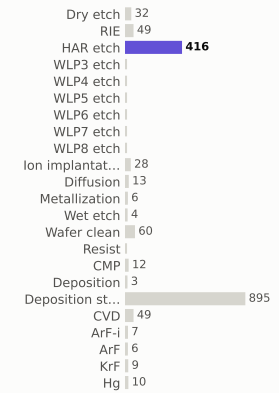

materials deposited (g)

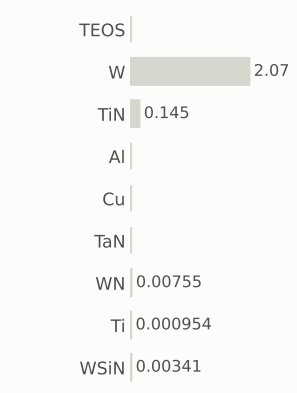

gases emitted (g)

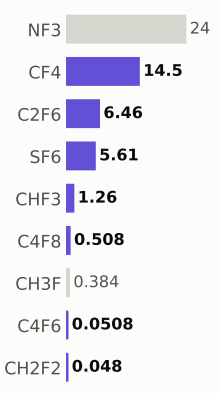

Step #20955.7718: HAR_etch

etch_noop · HAR_etch

1.04	2,269.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

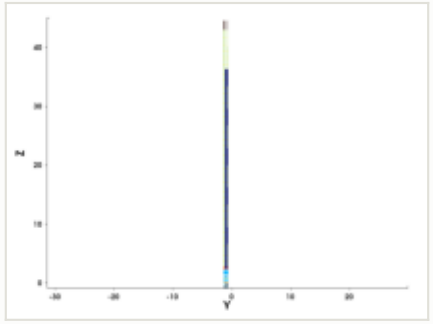

y cut at -1.035 µm

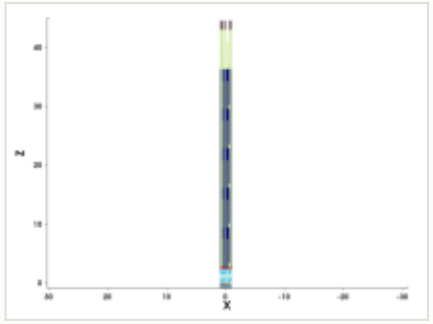

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

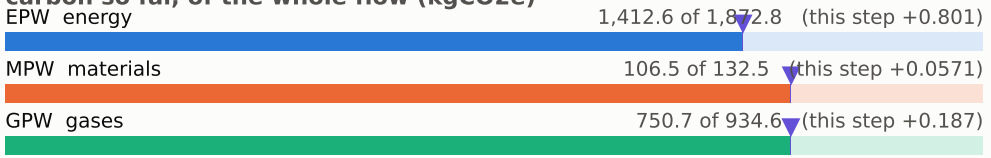

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

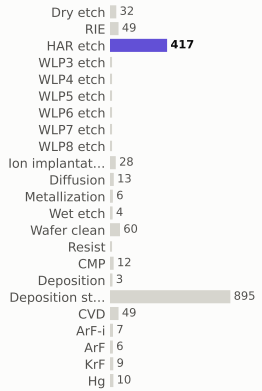

materials deposited (g)

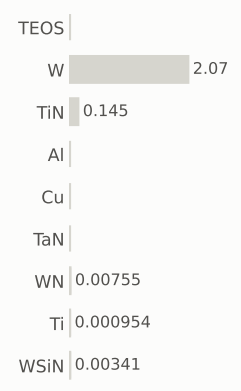

gases emitted (g)



Step #20955.8389: HAR_etch

etch_noop · HAR_etch

1.04	2,270.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

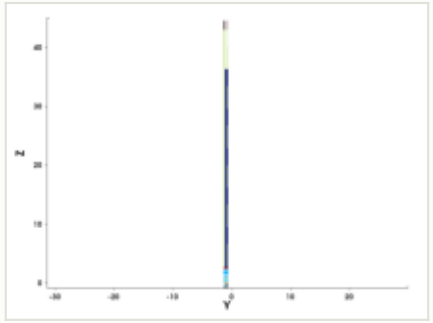

y cut at -1.035 µm

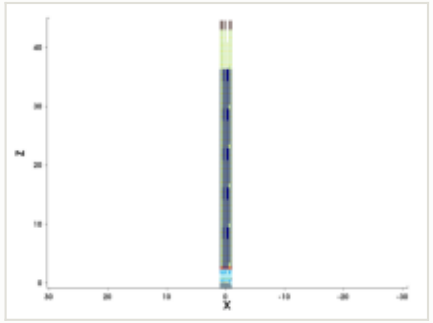

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

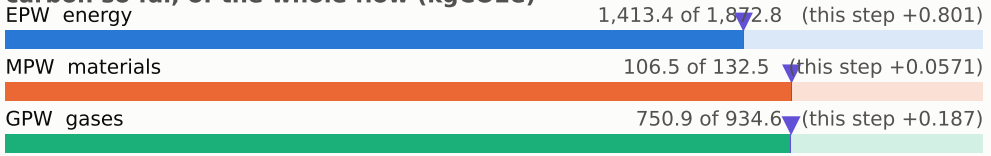

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

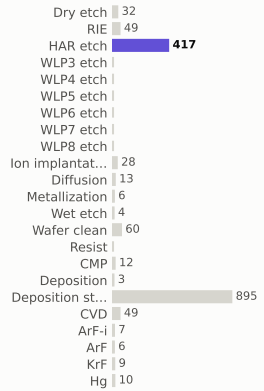

materials deposited (g)

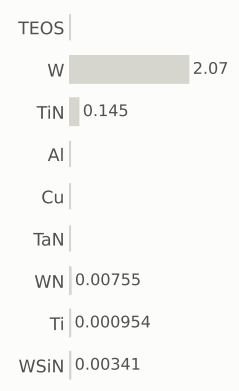

gases emitted (g)



Step #20955.906: HAR_etch

etch_noop · HAR_etch

1.04	2,271.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

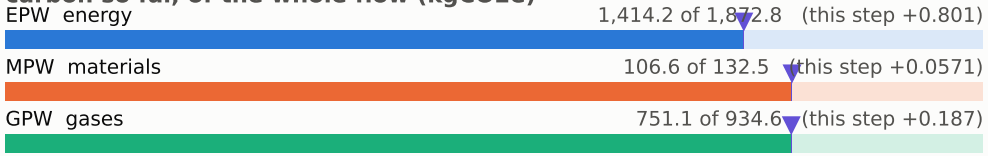

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

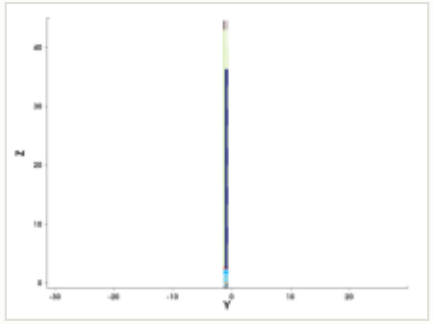

y cut at -1.035 µm

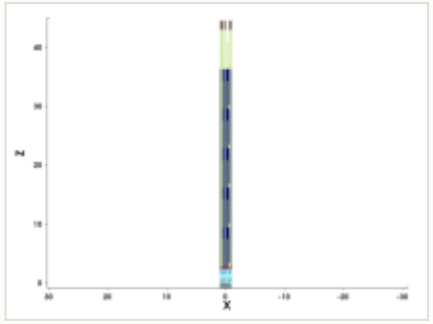

mask for this step

no mask for this step

steps by process area

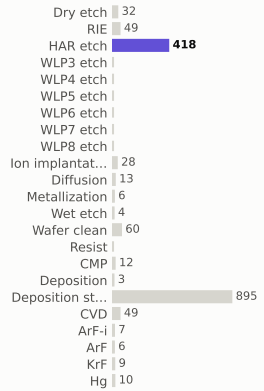

materials deposited (g)

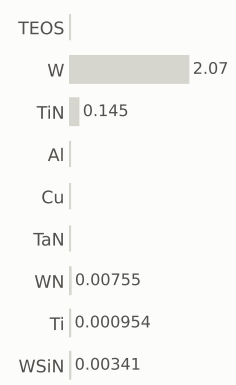

gases emitted (g)



Step #20955.9732: HAR_etch

etch_noop · HAR_etch

1.04	2,272.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

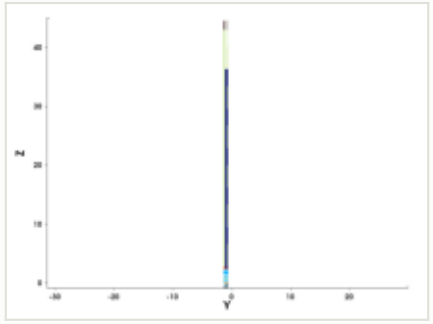

y cut at -1.035 µm

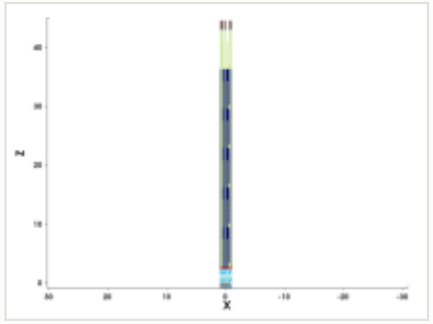

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

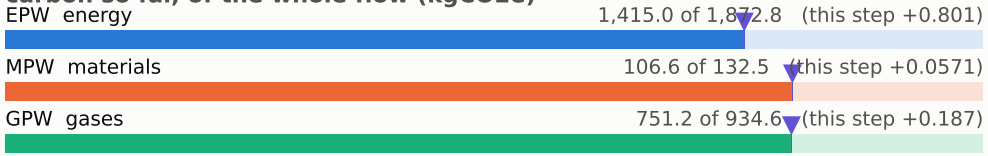

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

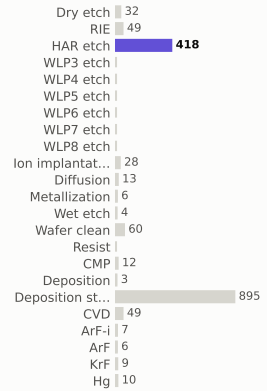

materials deposited (g)

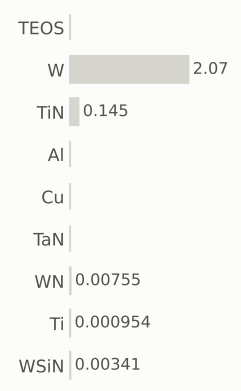

gases emitted (g)



Step #20956.0403: HAR_etch

etch_noop · HAR_etch

1.04	2,273.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

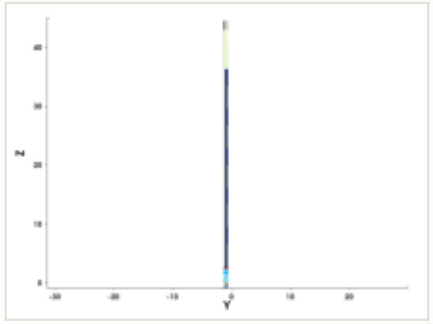

y cut at -1.035 µm

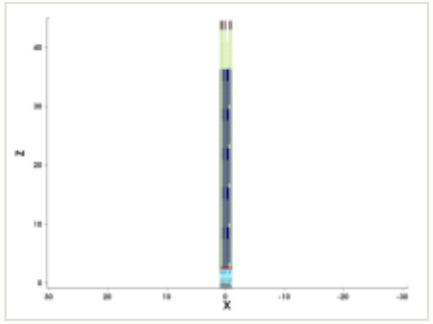

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

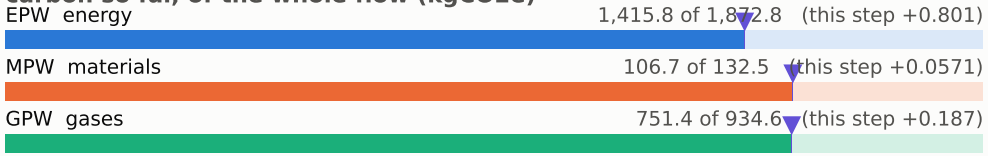

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

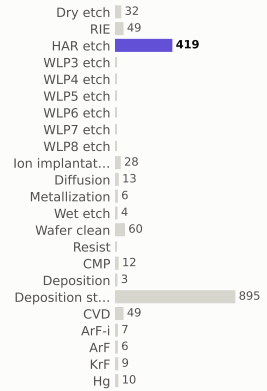

materials deposited (g)

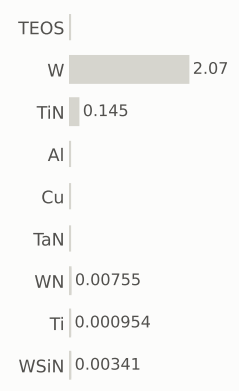

gases emitted (g)



Step #20956.1074: HAR_etch

etch_noop · HAR_etch

1.04	2,274.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

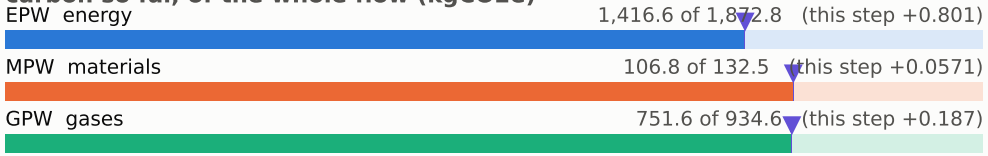

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

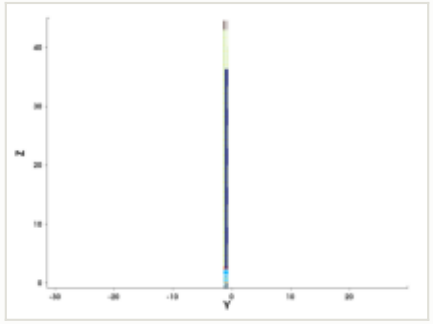

y cut at -1.035 µm

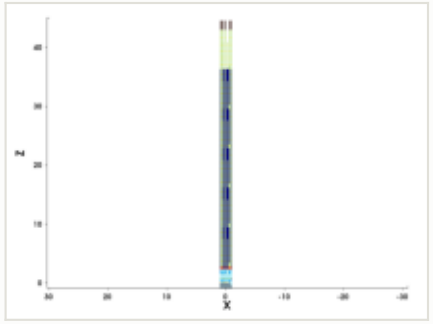

mask for this step

no mask for this step

steps by process area

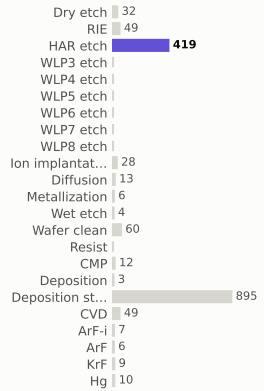

materials deposited (g)

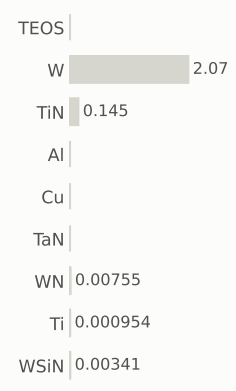

gases emitted (g)



Step #20956.1745: HAR_etch

etch_noop · HAR_etch

1.04	2,276.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

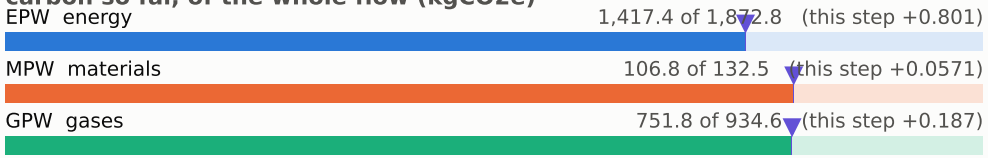

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

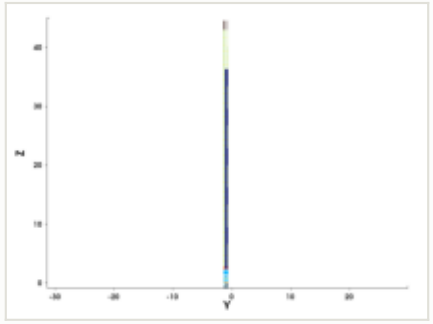

y cut at -1.035 µm

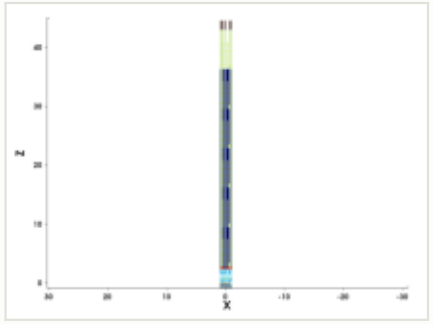

mask for this step

no mask for this step

steps by process area

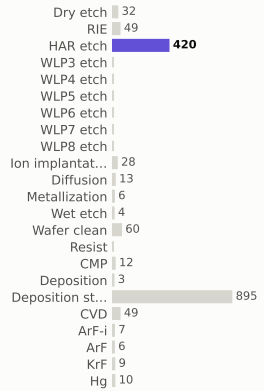

materials deposited (g)

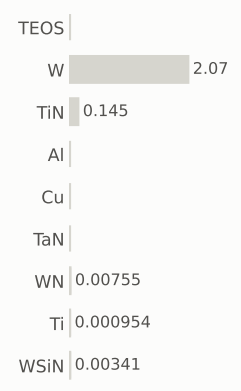

gases emitted (g)



Step #20956.2416: HAR_etch

etch_noop · HAR_etch

1.04	2,277.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

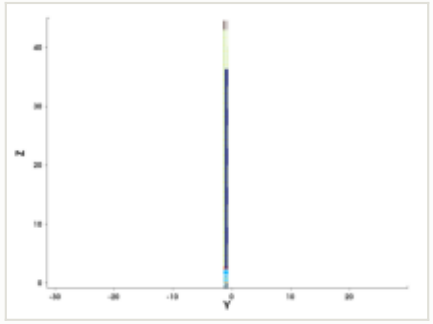

y cut at -1.035 µm

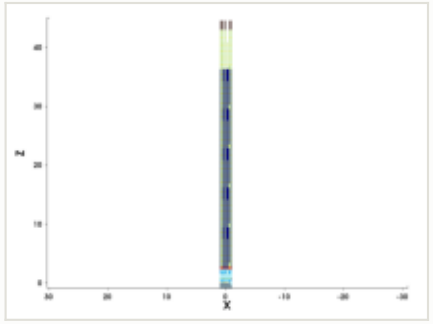

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

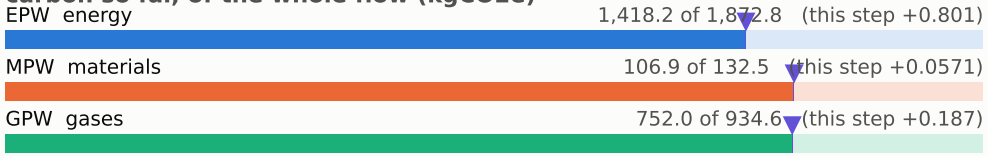

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

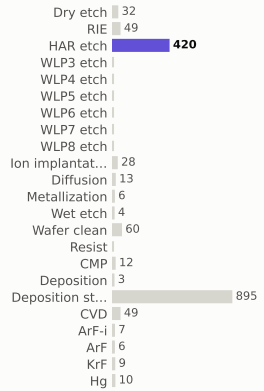

materials deposited (g)

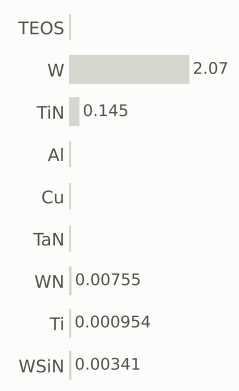

gases emitted (g)



Step #20956.3087: HAR_etch

etch_noop · HAR_etch

1.04	2,278.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

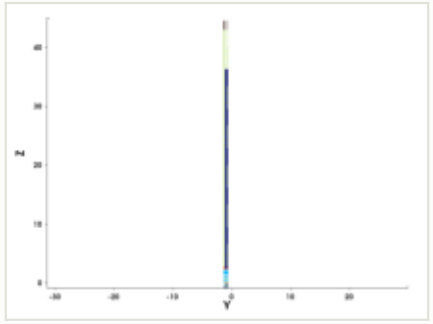

y cut at -1.035 µm

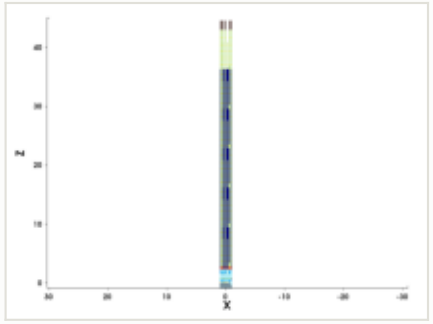

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

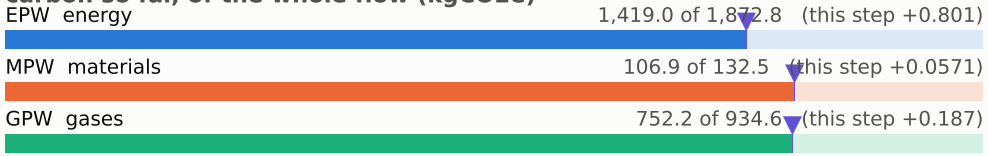

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

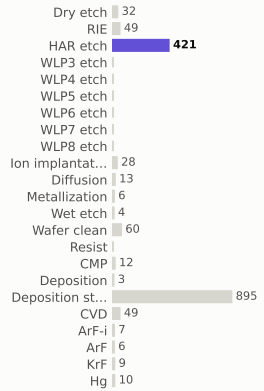

materials deposited (g)

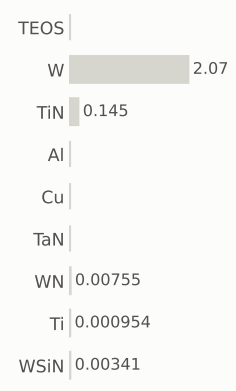

gases emitted (g)



Step #20956.3758: HAR_etch

etch_noop · HAR_etch

1.04	2,279.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

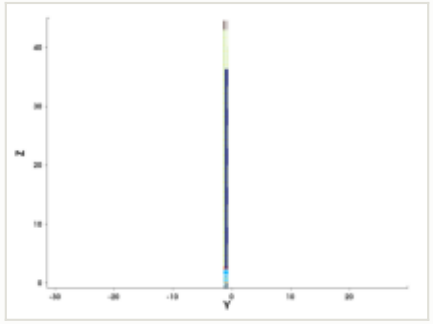

y cut at -1.035 µm

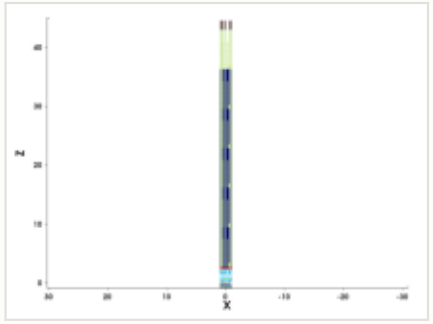

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

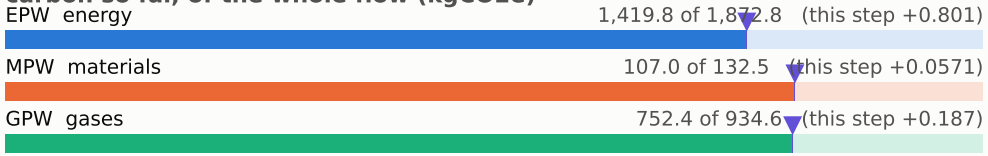

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

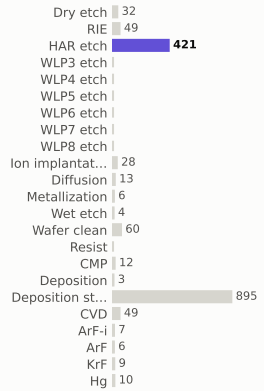

materials deposited (g)

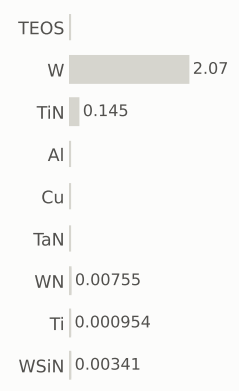

gases emitted (g)



Step #20956.443: HAR_etch

etch_noop · HAR_etch

1.04	2,280.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

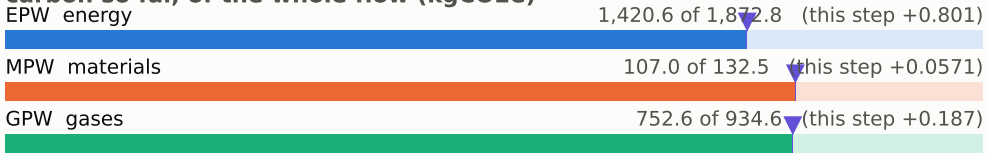

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

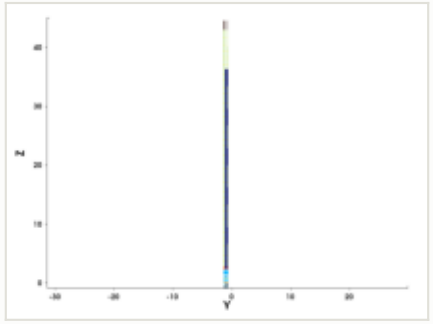

y cut at -1.035 µm

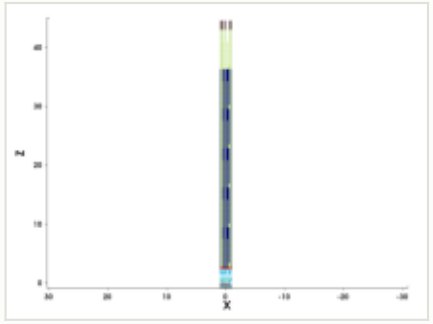

mask for this step

no mask for this step

steps by process area

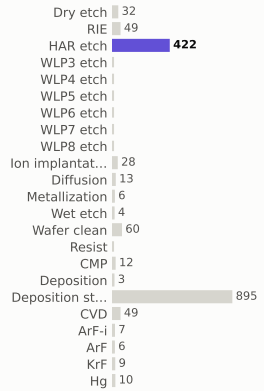

materials deposited (g)

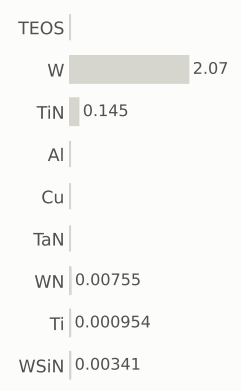

gases emitted (g)



Step #20956.5101: HAR_etch

etch_noop · HAR_etch

1.04	2,281.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

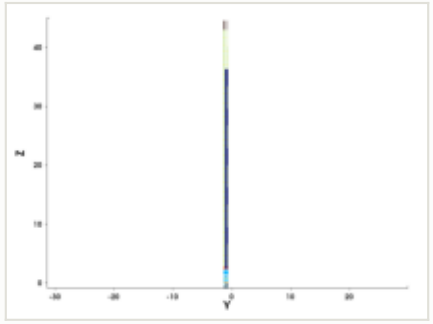

y cut at -1.035 µm

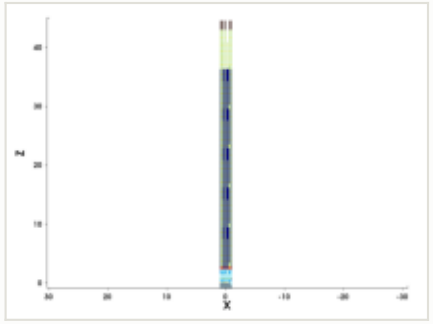

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

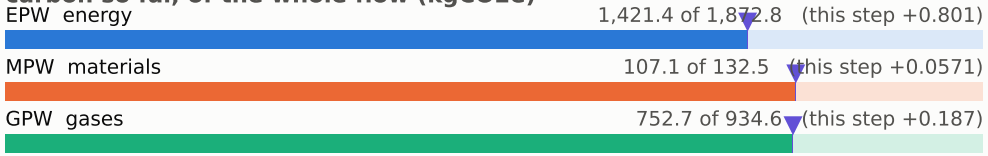

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

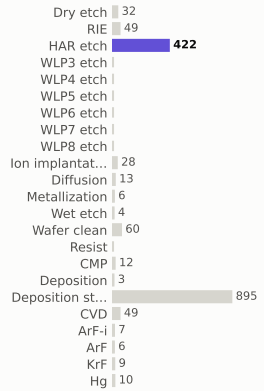

materials deposited (g)

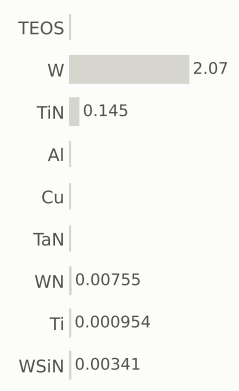

gases emitted (g)



Step #20956.5772: HAR_etch

etch_noop · HAR_etch

1.04	2,282.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

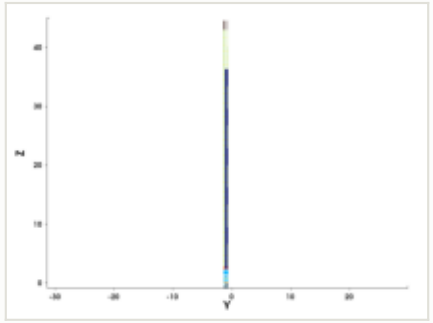

y cut at -1.035 µm

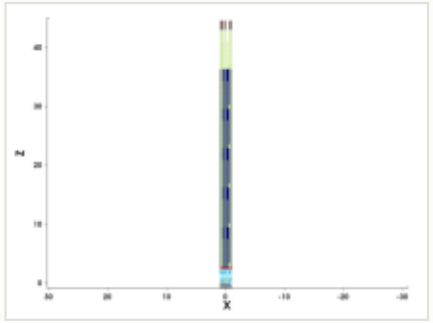

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

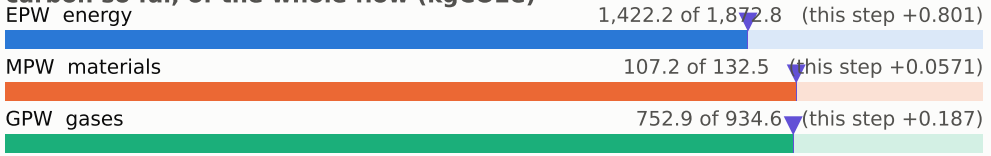

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

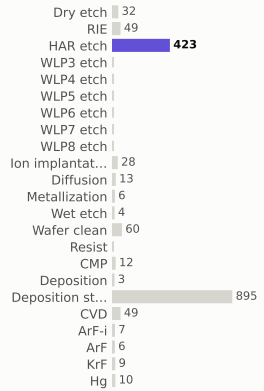

materials deposited (g)

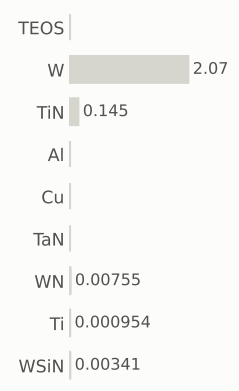

gases emitted (g)



Step #20956.6443: HAR_etch

etch_noop · HAR_etch

1.04	2,283.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

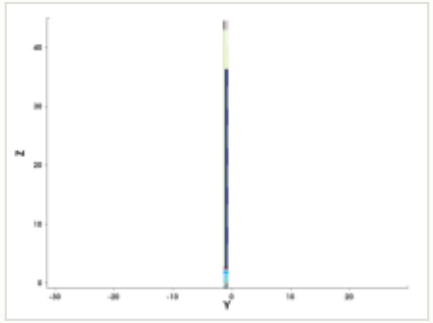

y cut at -1.035 µm

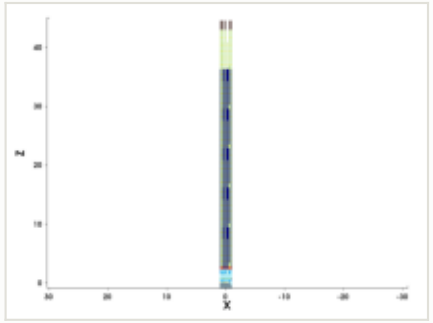

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

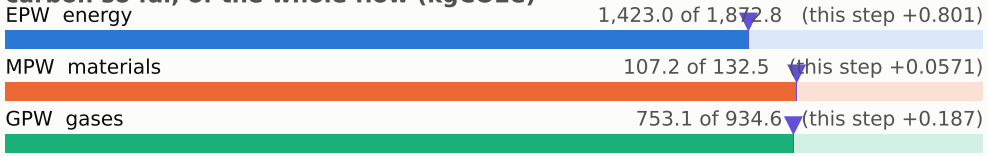

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

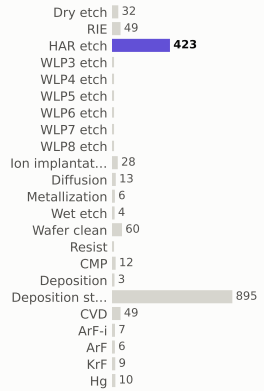

materials deposited (g)

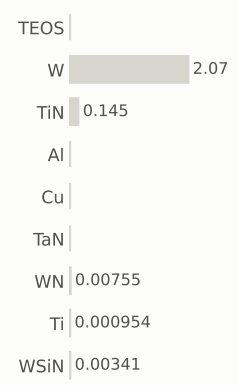

gases emitted (g)



Step #20956.7114: HAR_etch

etch_noop · HAR_etch

1.04	2,284.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

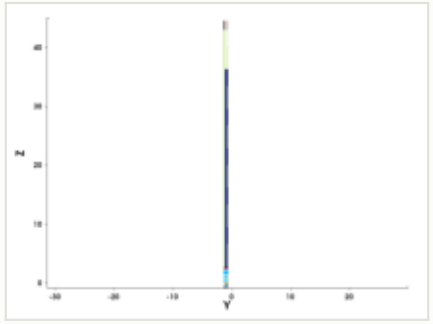

y cut at -1.035 µm

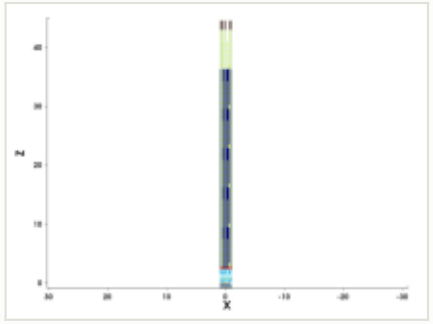

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

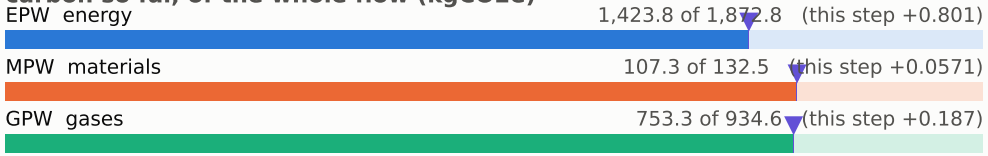

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

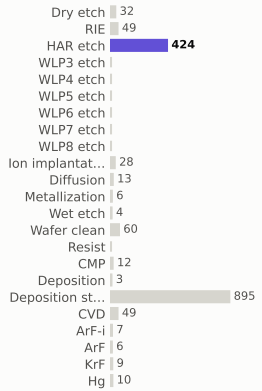

materials deposited (g)

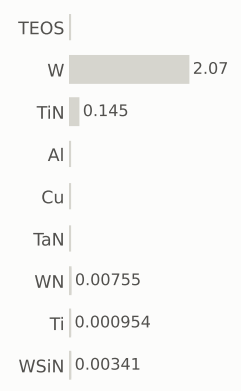

gases emitted (g)



Step #20956.7785: HAR_etch

etch_noop · HAR_etch

1.04	2,285.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

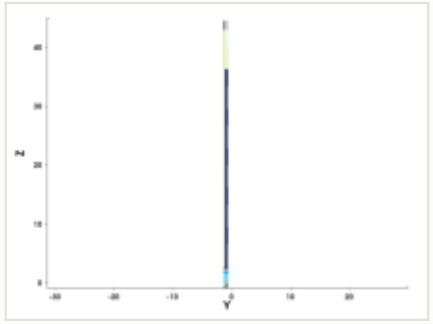

y cut at -1.035 µm

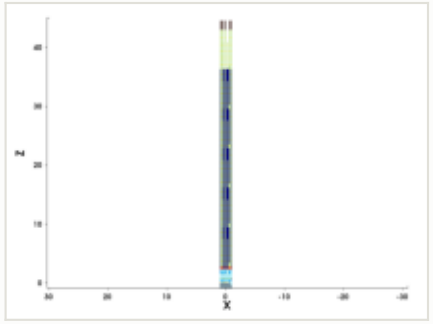

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

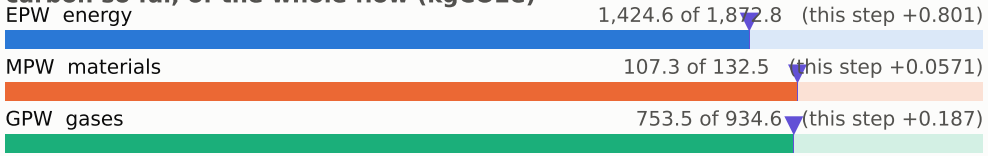

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

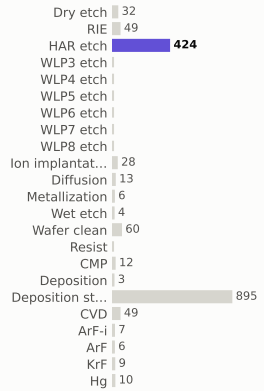

materials deposited (g)

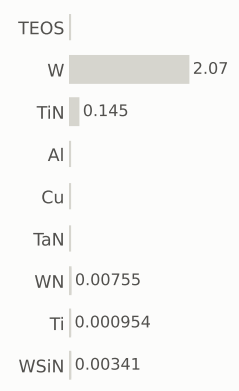

gases emitted (g)



Step #20956.8456: HAR_etch

etch_noop · HAR_etch

1.04	2,286.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

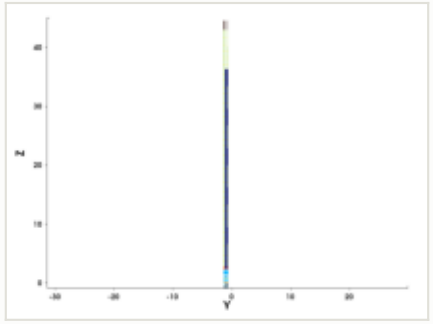

y cut at -1.035 µm

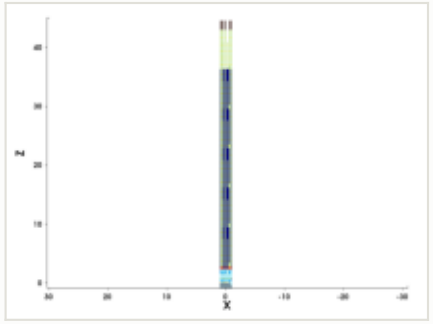

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

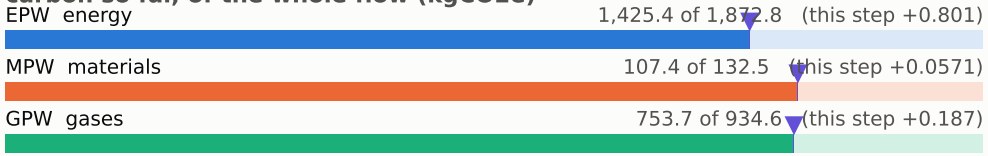

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

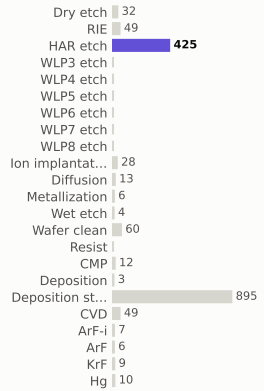

materials deposited (g)

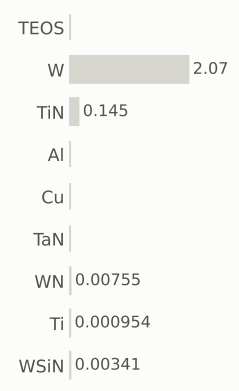

gases emitted (g)



Step #20956.9128: HAR_etch

etch_noop · HAR_etch

1.04	2,287.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

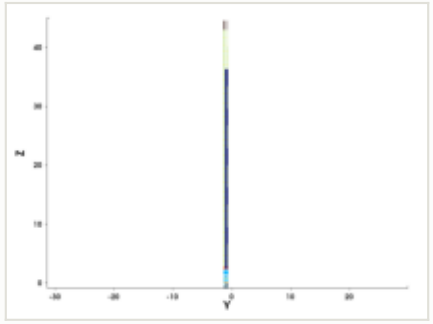

y cut at -1.035 µm

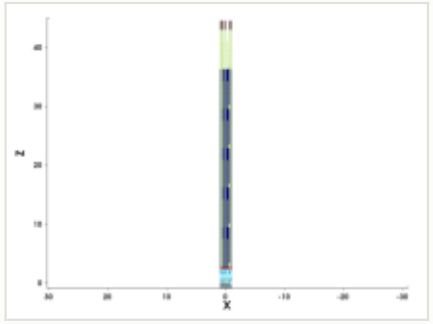

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

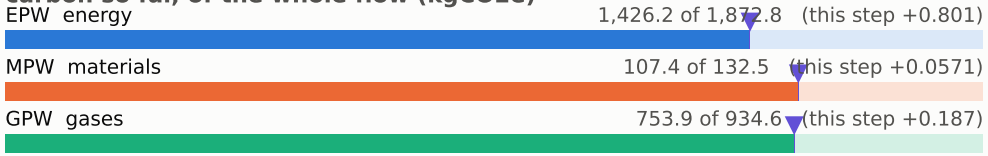

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

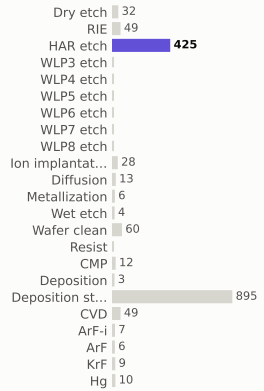

materials deposited (g)

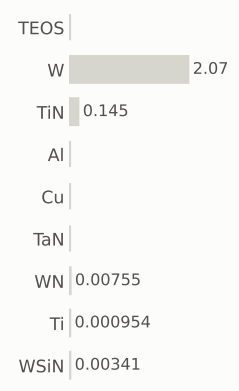

gases emitted (g)



Step #20956.9799: HAR_etch

etch_noop · HAR_etch

1.04	2,288.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

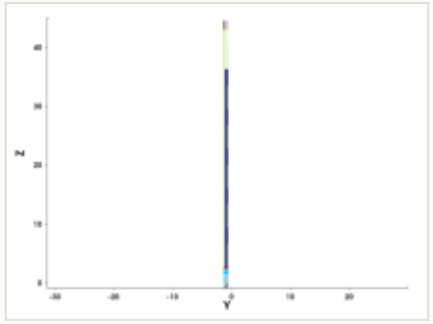

y cut at -1.035 µm

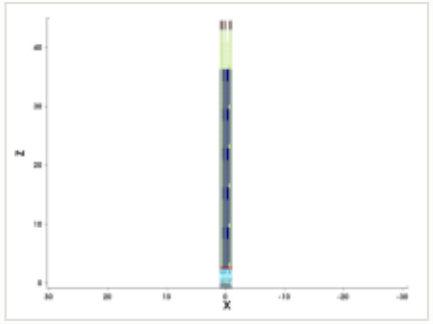

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

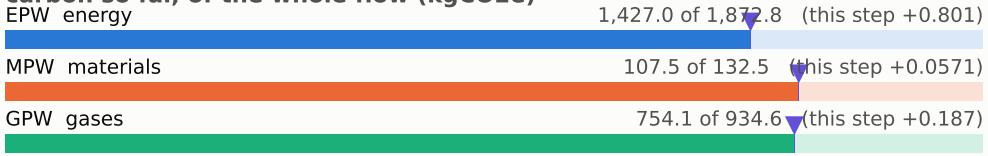

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

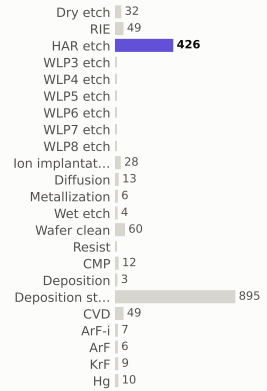

materials deposited (g)

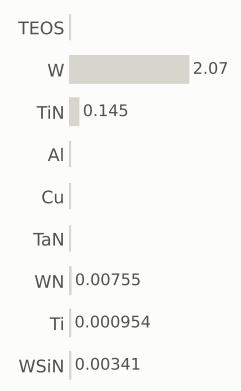

gases emitted (g)

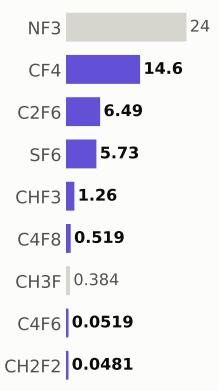

Step #20957.047: HAR_etch

etch_noop · HAR_etch

1.04	2,289.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

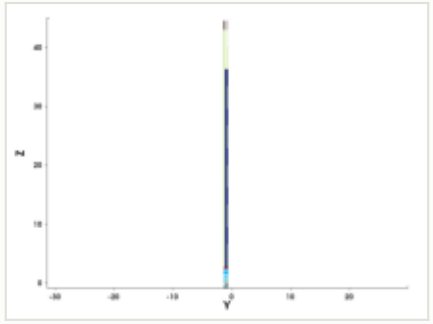

y cut at -1.035 µm

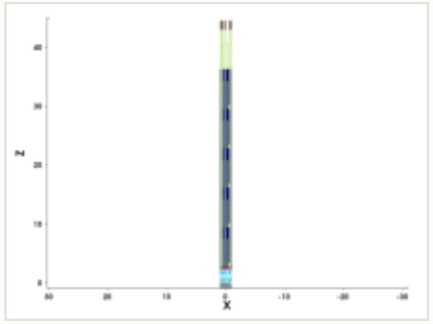

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

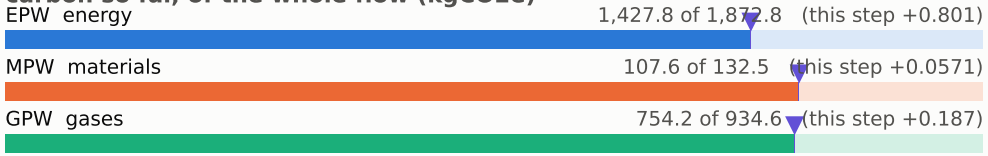

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

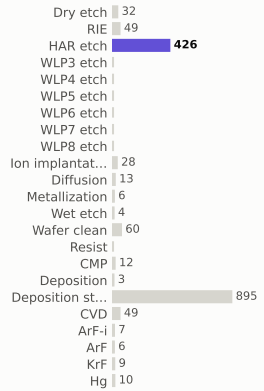

materials deposited (g)

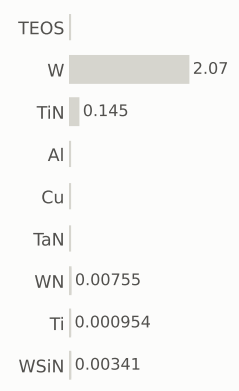

gases emitted (g)



Step #20957.1141: HAR_etch

etch_noop · HAR_etch

1.04	2,290.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

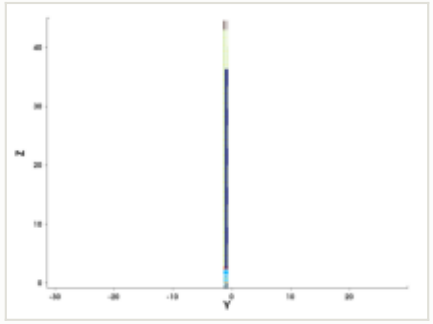

y cut at -1.035 µm

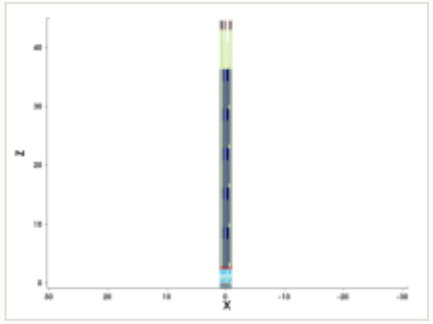

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

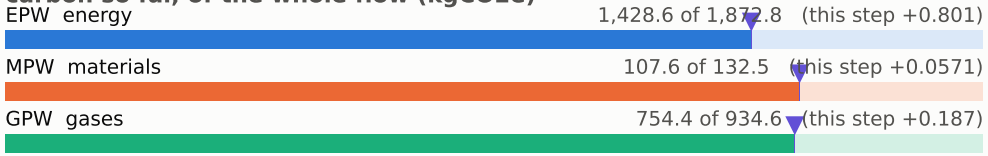

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

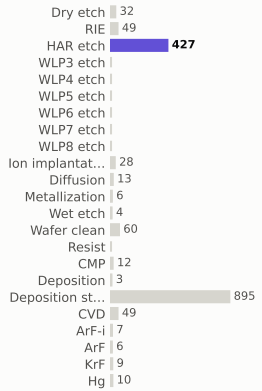

materials deposited (g)

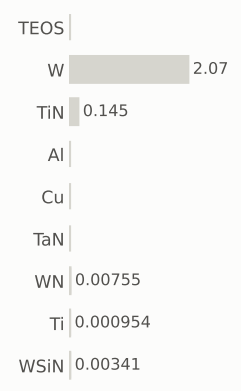

gases emitted (g)

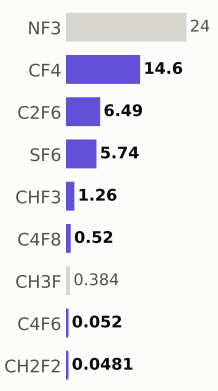

Step #20957.1812: HAR_etch

etch_noop · HAR_etch

1.04	2,291.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

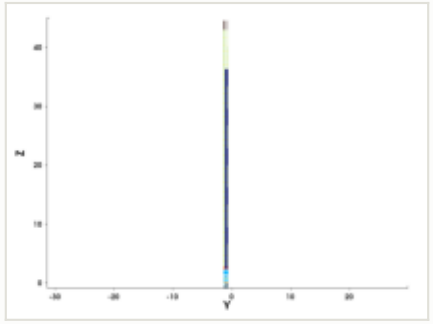

y cut at -1.035 µm

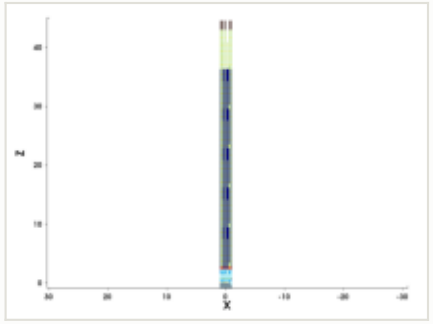

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

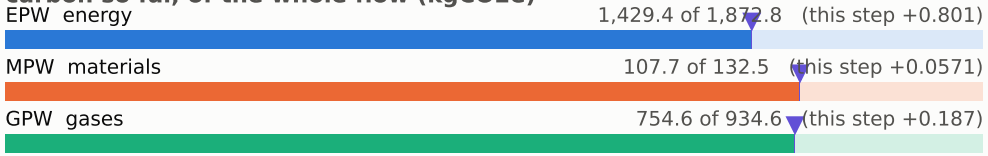

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

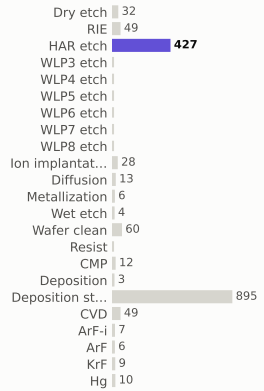

materials deposited (g)

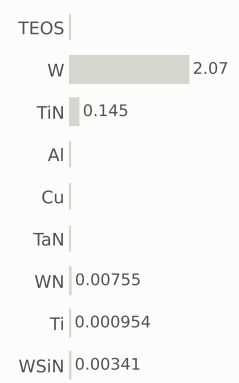

gases emitted (g)



Step #20957.2483: HAR_etch

etch_noop · HAR_etch

1.04	2,292.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

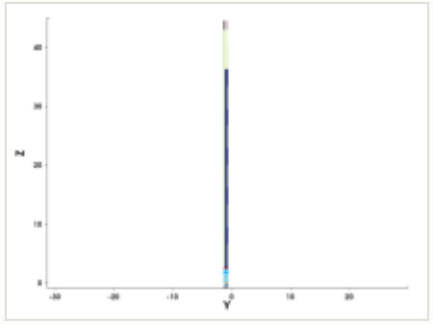

y cut at -1.035 µm

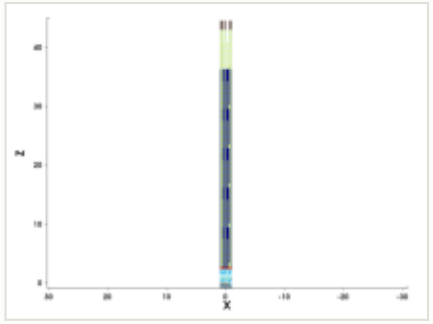

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

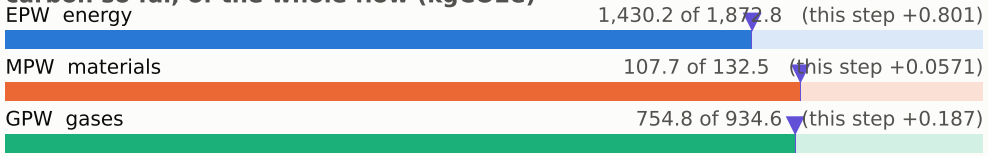

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

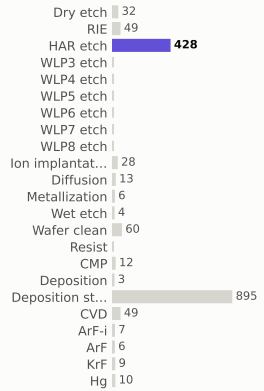

materials deposited (g)

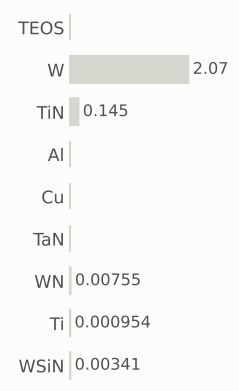

gases emitted (g)



Step #20957.3154: HAR_etch

etch_noop · HAR_etch

1.04	2,293.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

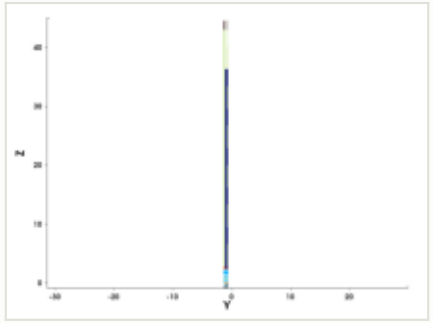

y cut at -1.035 µm

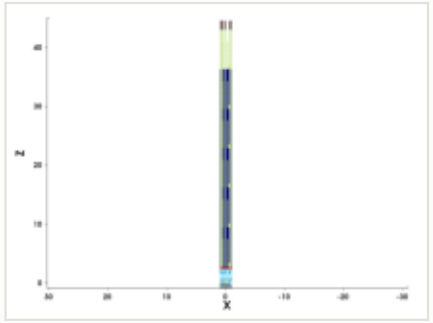

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

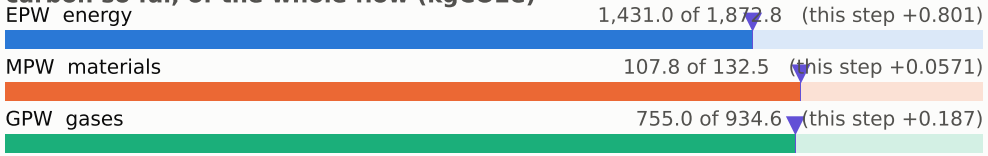

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

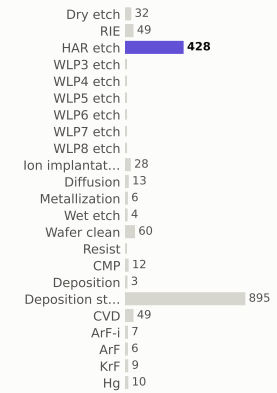

materials deposited (g)

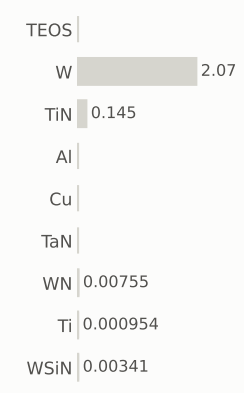

gases emitted (g)



Step #20957.3826: HAR_etch

etch_noop · HAR_etch

1.04	2,294.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

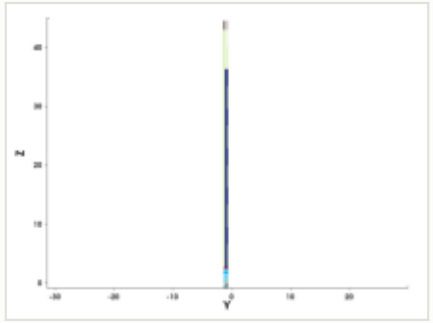

y cut at -1.035 µm

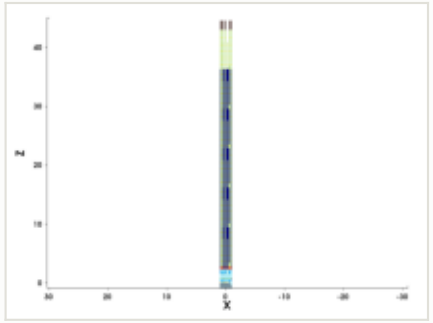

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

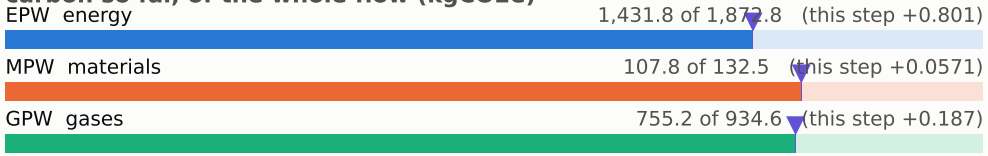

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

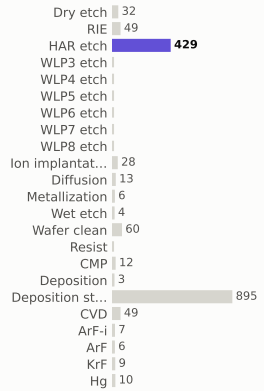

materials deposited (g)

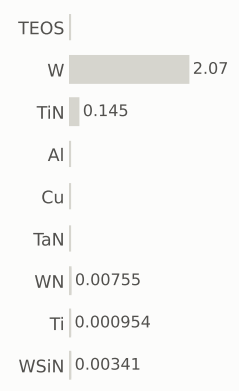

gases emitted (g)



Step #20957.4497: HAR_etch

etch_noop · HAR_etch

1.04	2,295.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

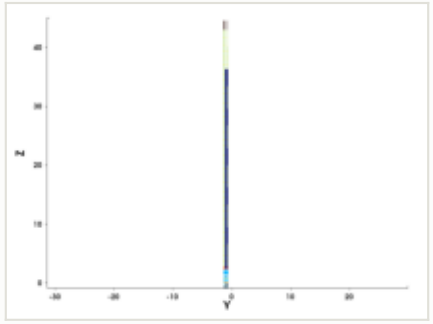

y cut at -1.035 µm

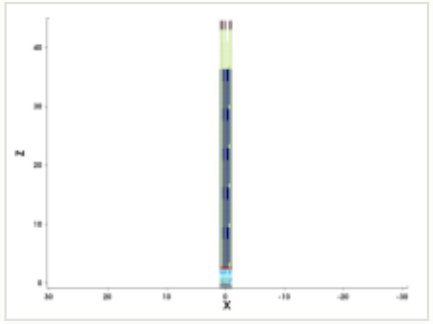

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

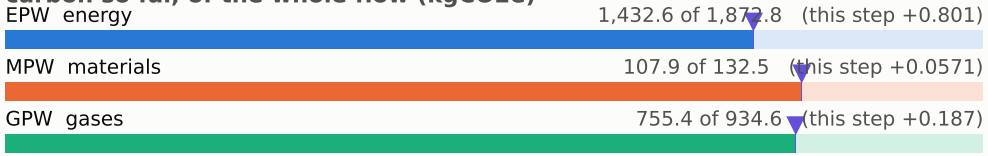

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

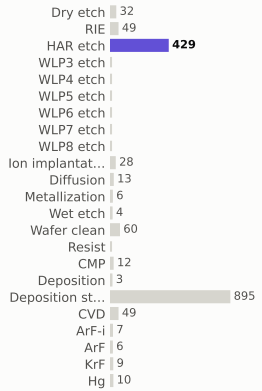

materials deposited (g)

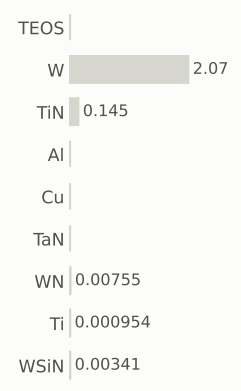

gases emitted (g)



Step #20957.5168: HAR_etch

etch_noop · HAR_etch

1.04	2,296.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

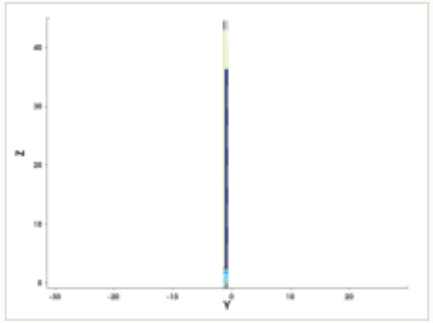

y cut at -1.035 µm

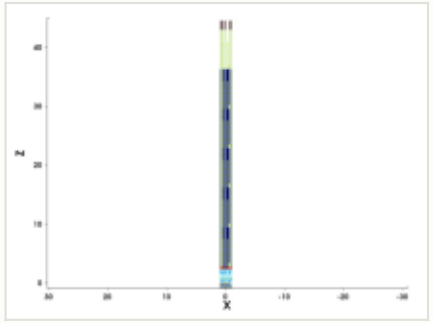

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

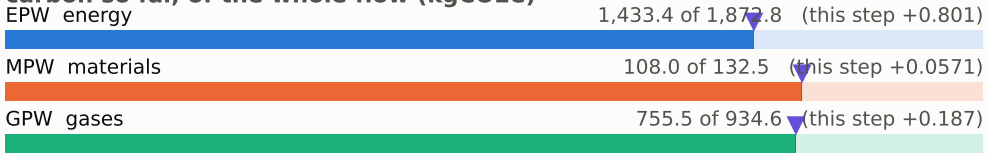

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

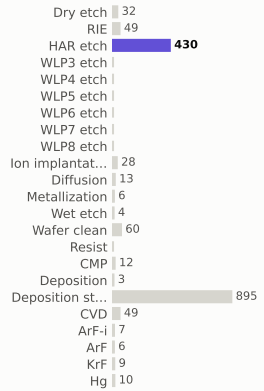

materials deposited (g)

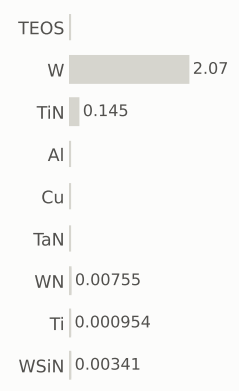

gases emitted (g)



Step #20957.5839: HAR_etch

etch_noop · HAR_etch

1.04	2,297.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

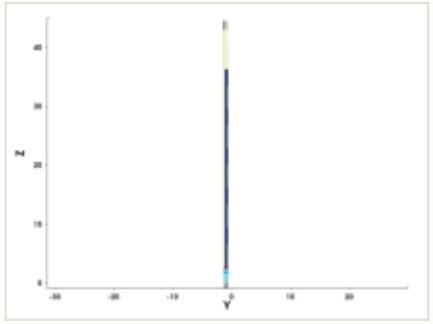

y cut at -1.035 µm

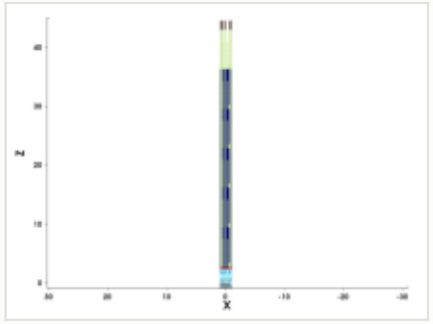

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

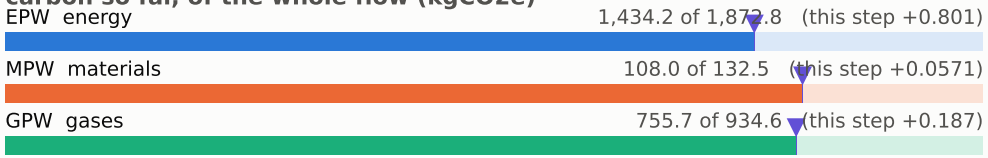

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

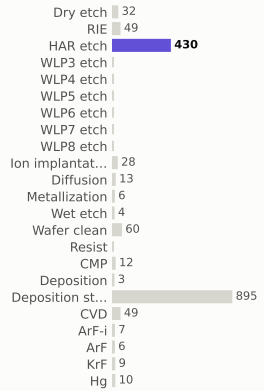

materials deposited (g)

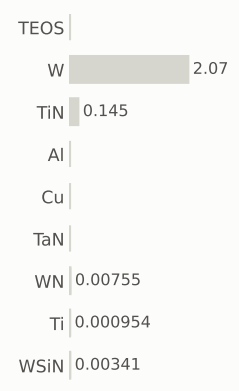

gases emitted (g)



Step #20957.651: HAR_etch

etch_noop · HAR_etch

1.04	2,299.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

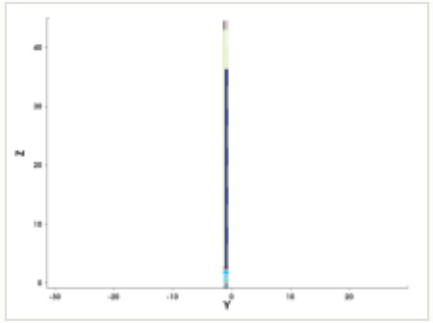

y cut at -1.035 µm

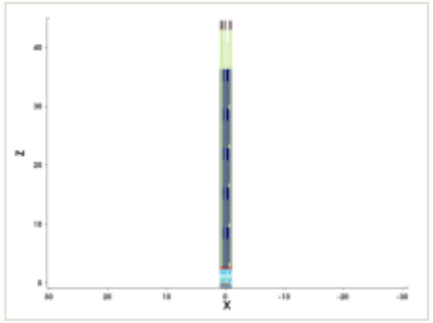

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

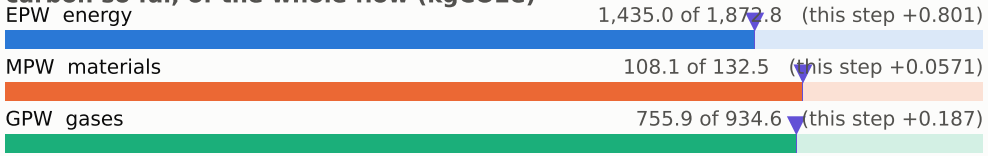

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

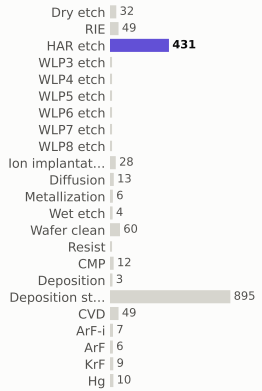

materials deposited (g)

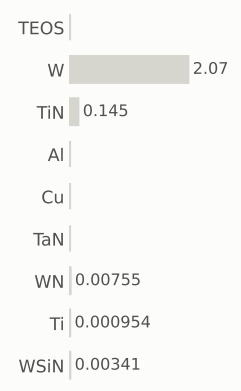

gases emitted (g)



Step #20957.7181: HAR_etch

etch_noop · HAR_etch

1.04	2,300.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

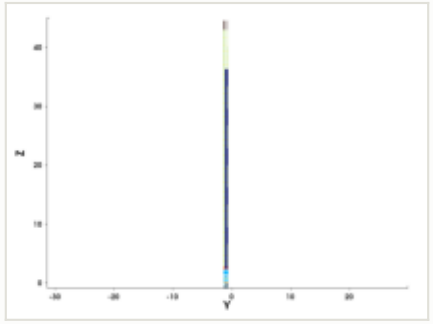

y cut at -1.035 µm

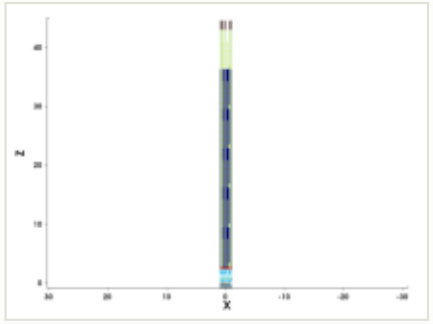

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

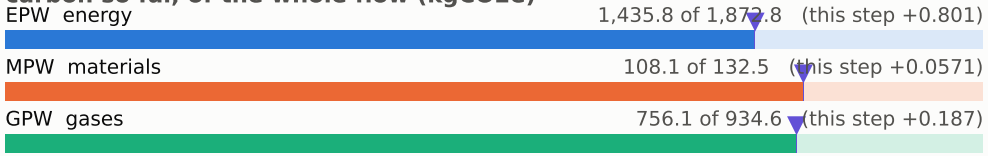

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

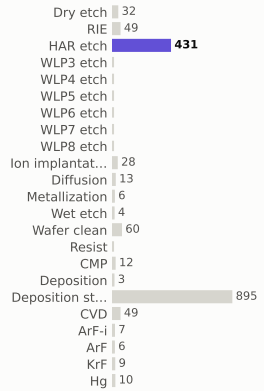

materials deposited (g)

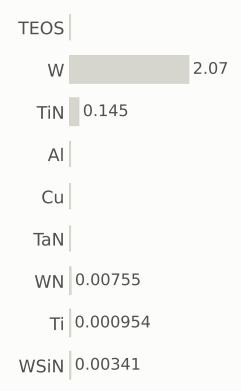

gases emitted (g)



Step #20957.7852: HAR_etch

etch_noop · HAR_etch

1.04	2,301.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

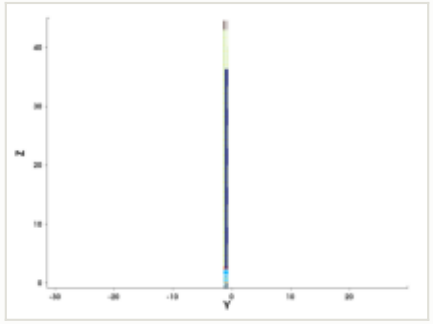

y cut at -1.035 µm

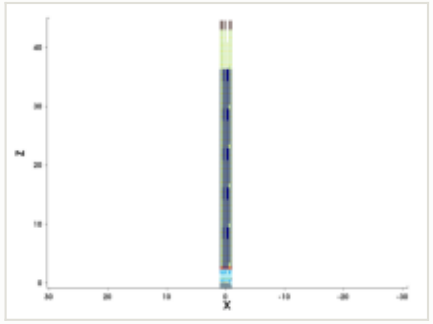

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

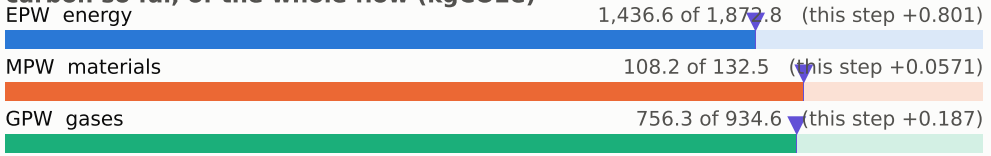

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

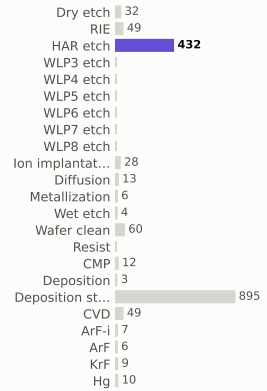

materials deposited (g)

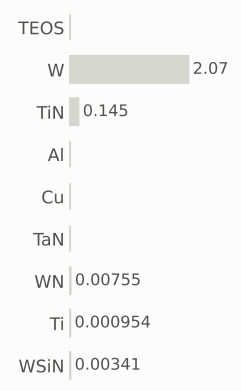

gases emitted (g)



Step #20957.8523: HAR_etch

etch_noop · HAR_etch

1.04	2,302.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

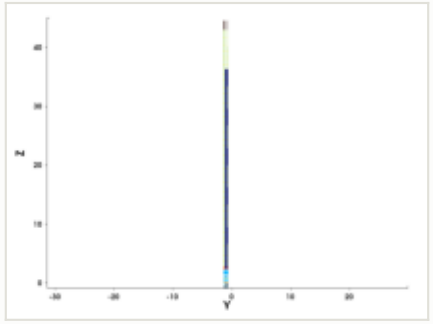

y cut at -1.035 µm

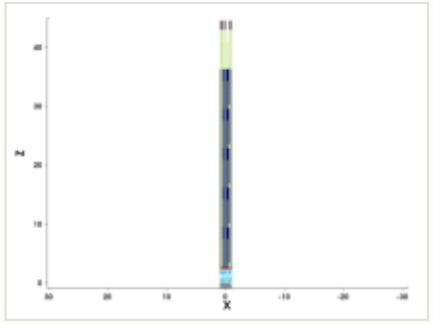

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

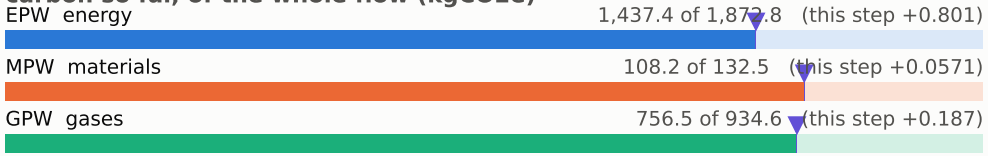

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

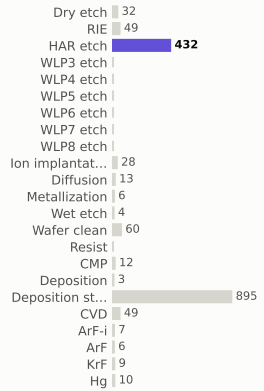

materials deposited (g)

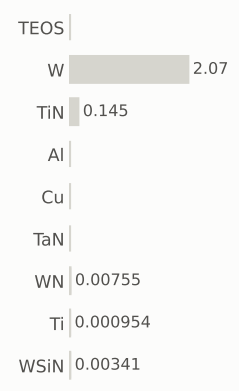

gases emitted (g)



Step #20957.9195: HAR_etch

etch_noop · HAR_etch

1.04	2,303.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

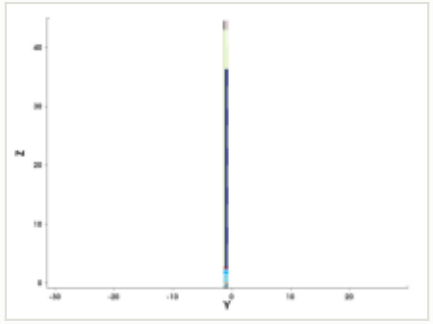

y cut at -1.035 µm

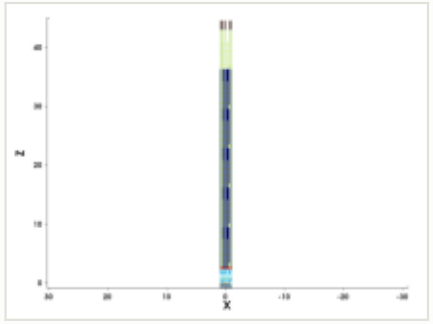

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

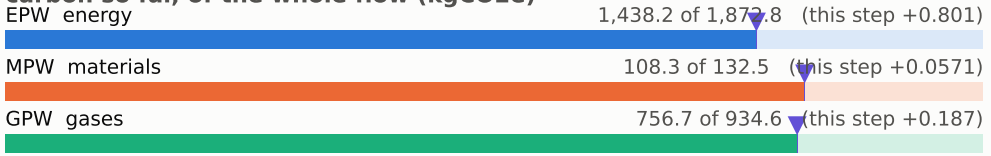

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

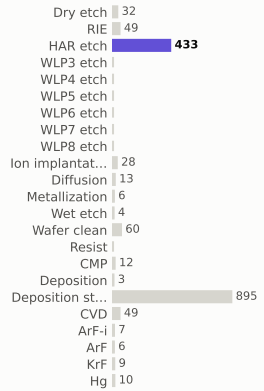

materials deposited (g)

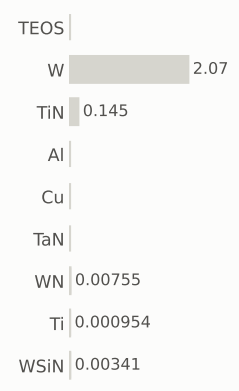

gases emitted (g)



Step #20957.9866: HAR_etch

etch_noop · HAR_etch

1.04	2,304.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

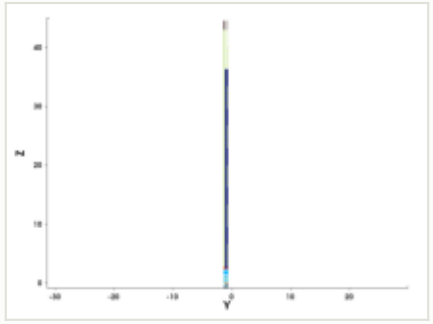

y cut at -1.035 µm

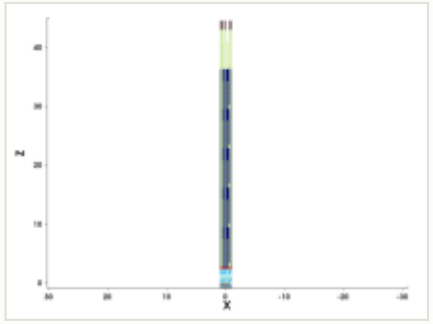

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

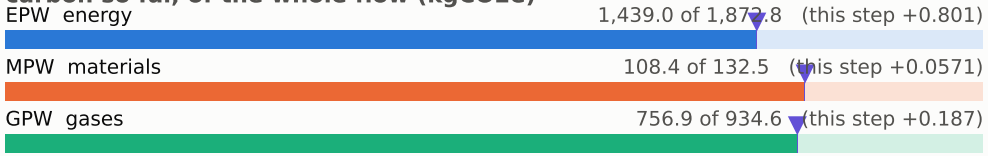

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

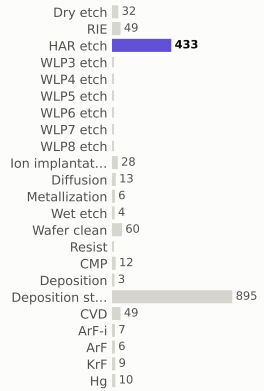

materials deposited (g)

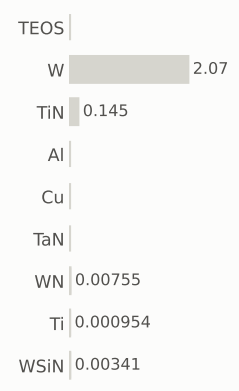

gases emitted (g)



Step #20958.0537: HAR_etch

etch_noop · HAR_etch

1.04	2,305.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

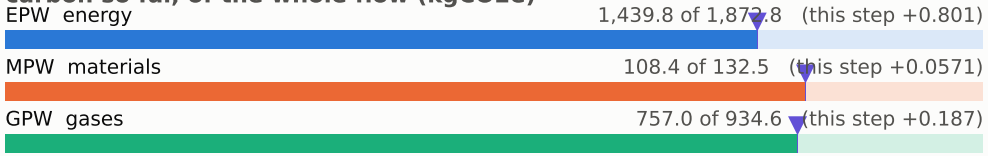

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

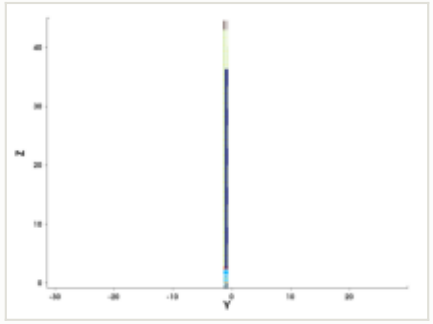

y cut at -1.035 µm

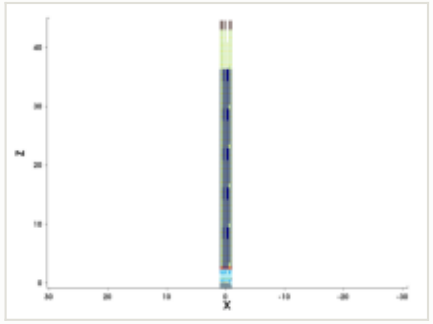

mask for this step

no mask for this step

steps by process area

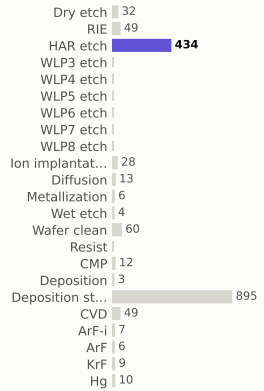

materials deposited (g)

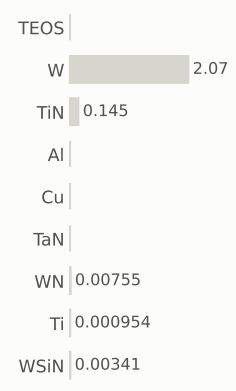

gases emitted (g)



Step #20958.1208: HAR_etch

etch_noop · HAR_etch

1.04	2,306.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

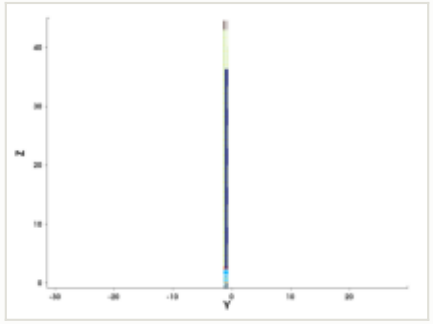

y cut at -1.035 µm

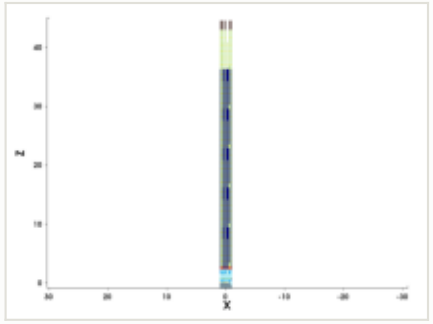

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

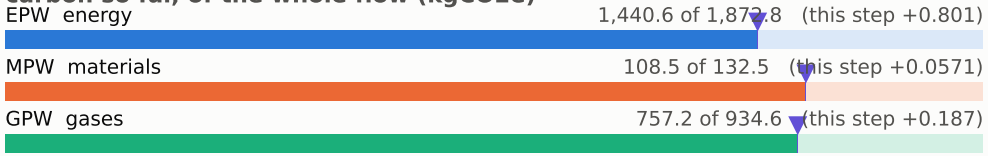

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

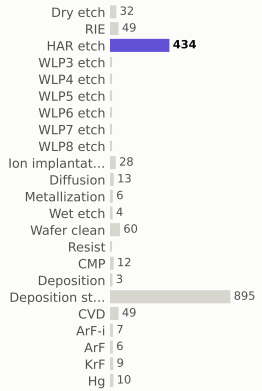

materials deposited (g)

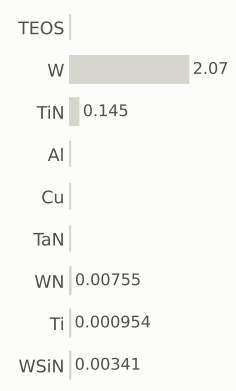

gases emitted (g)

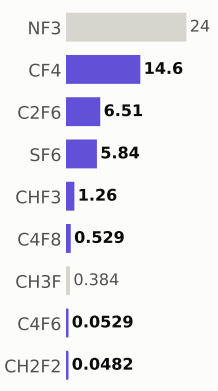

Step #20958.1879: HAR_etch

etch_noop · HAR_etch

1.04	2,307.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

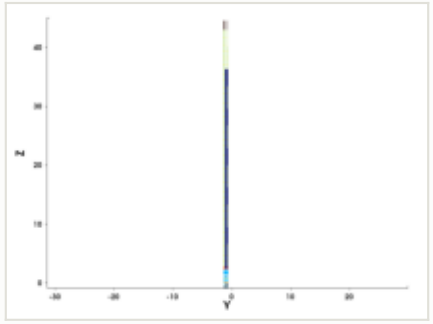

y cut at -1.035 µm

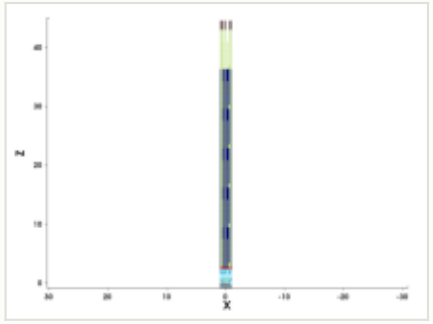

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

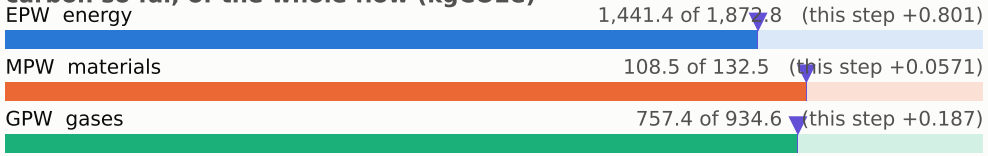

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

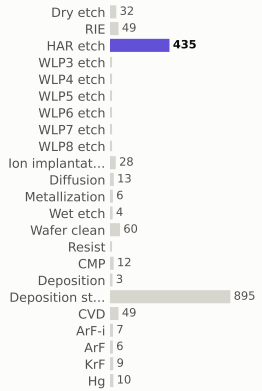

materials deposited (g)

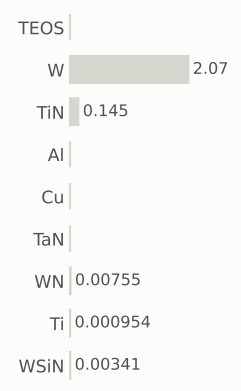

gases emitted (g)



Step #20958.255: HAR_etch

etch_noop · HAR_etch

1.04	2,308.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

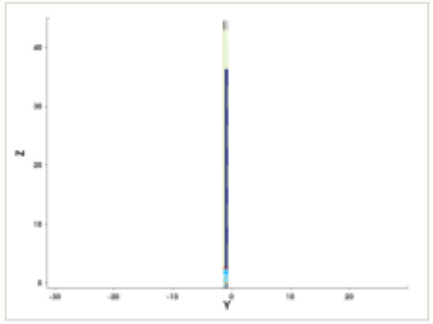

y cut at -1.035 µm

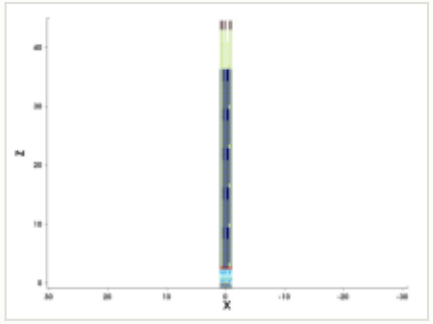

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

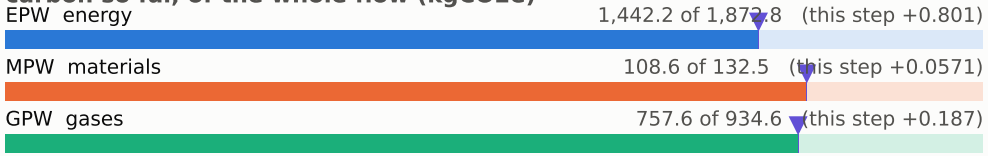

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

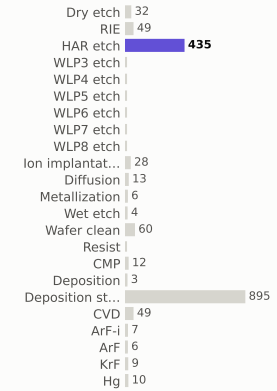

materials deposited (g)

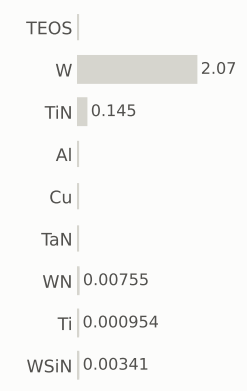

gases emitted (g)



Step #20958.3221: HAR_etch

etch_noop · HAR_etch

1.04	2,309.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

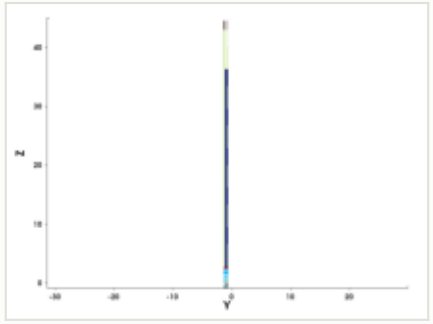

y cut at -1.035 µm

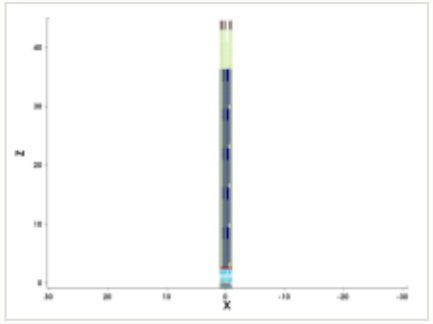

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

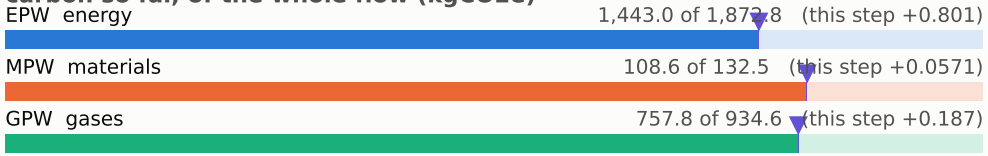

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

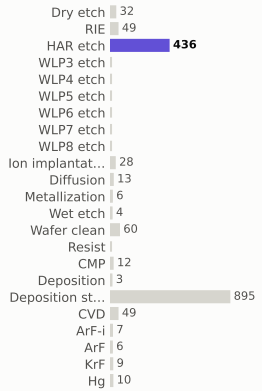

materials deposited (g)

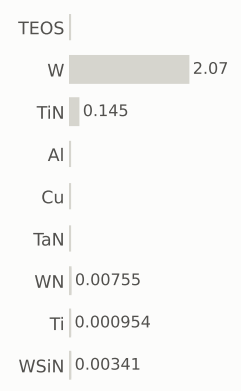

gases emitted (g)

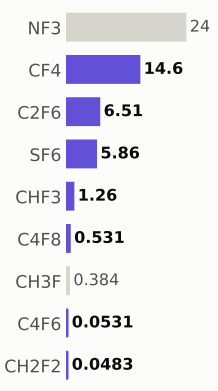

Step #20958.3893: HAR_etch

etch_noop · HAR_etch

1.04	2,310.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

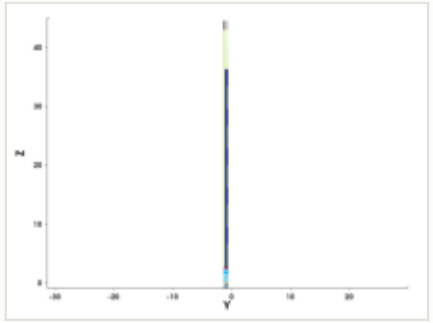

y cut at -1.035 µm

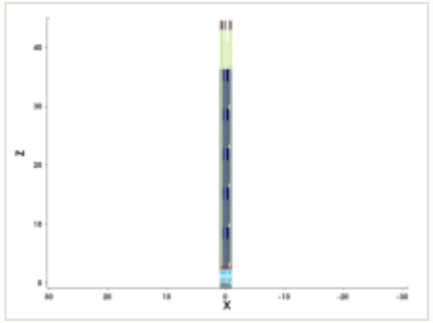

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

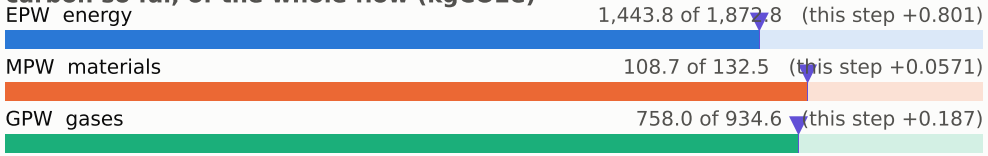

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

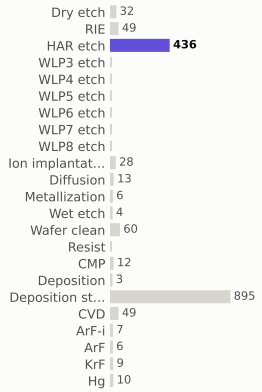

materials deposited (g)

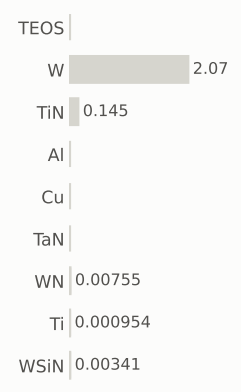

gases emitted (g)



Step #20958.4564: HAR_etch

etch_noop · HAR_etch

1.04	2,311.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

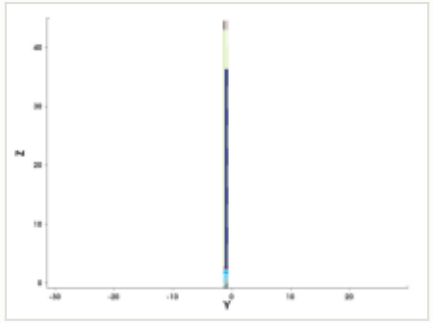

y cut at -1.035 µm

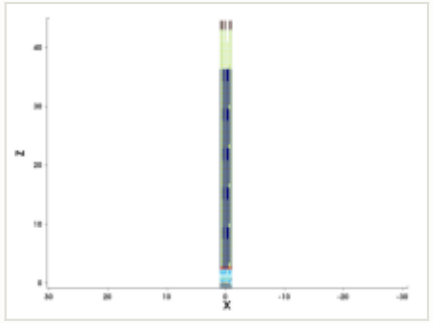

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

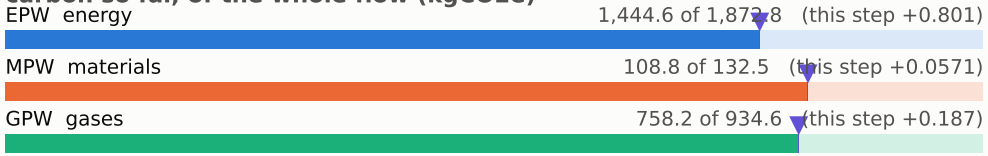

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

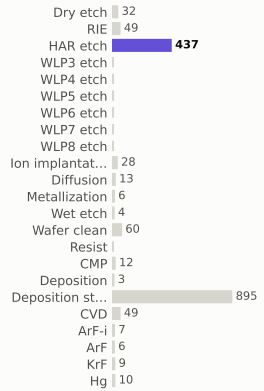

materials deposited (g)

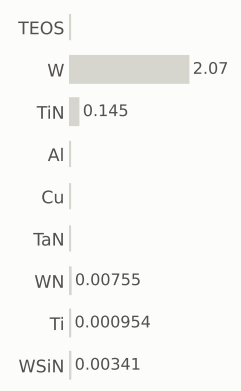

gases emitted (g)



Step #20958.5235: HAR_etch

etch_noop · HAR_etch

1.04	2,312.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

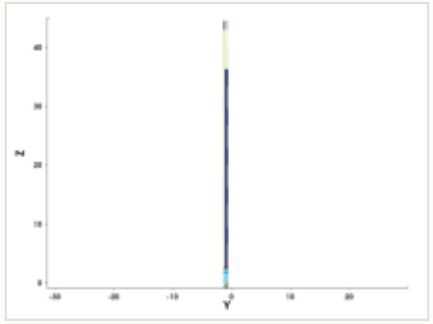

y cut at -1.035 µm

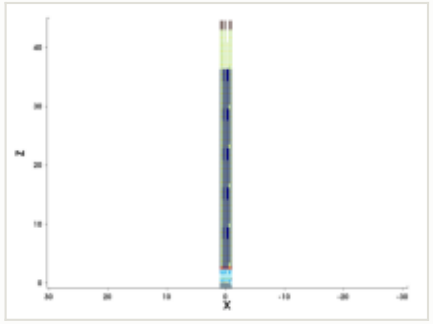

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

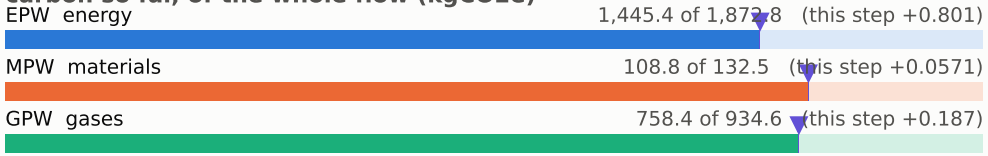

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

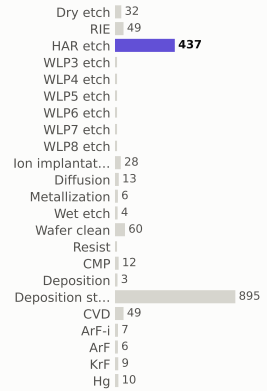

materials deposited (g)

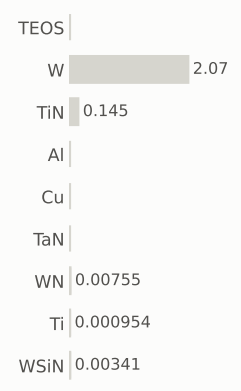

gases emitted (g)

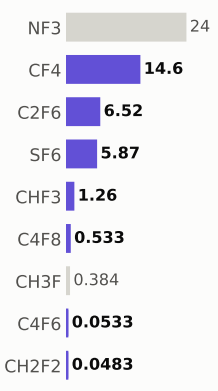

Step #20958.5906: HAR_etch

etch_noop · HAR_etch

1.04	2,313.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

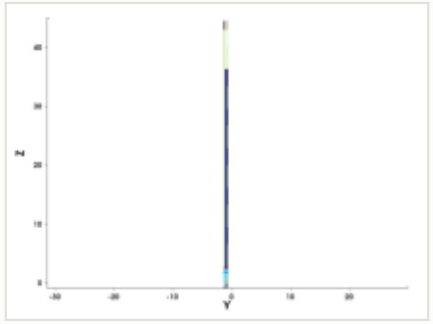

y cut at -1.035 µm

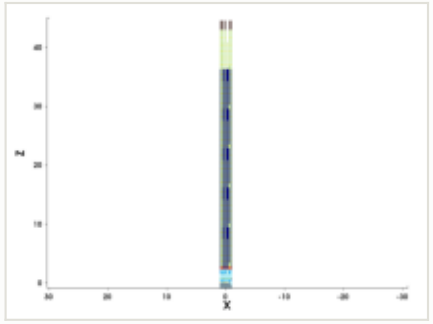

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

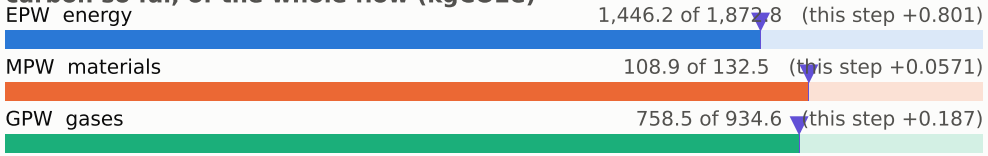

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

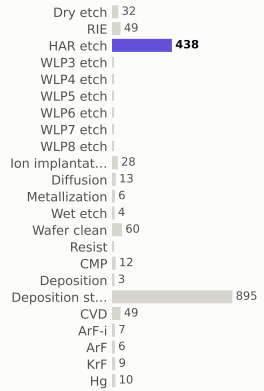

materials deposited (g)

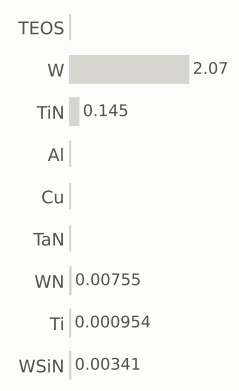

gases emitted (g)



Step #20958.6577: HAR_etch

etch_noop · HAR_etch

1.04	2,314.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

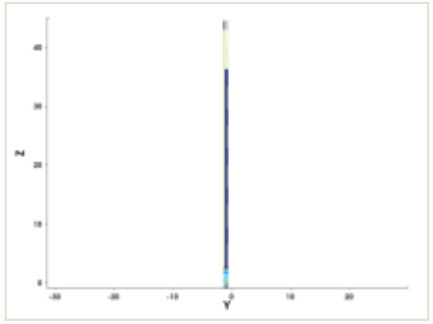

y cut at -1.035 µm

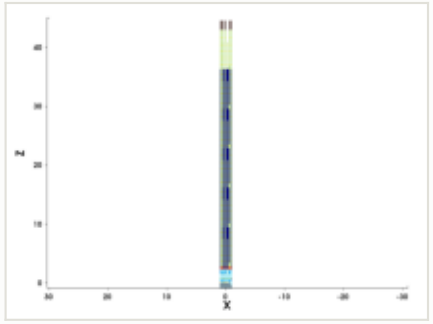

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

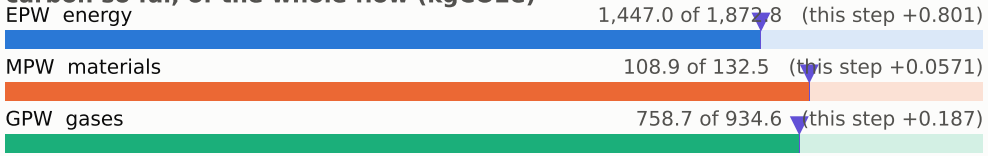

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

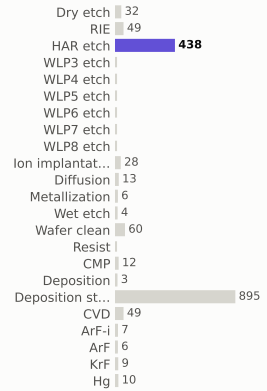

materials deposited (g)

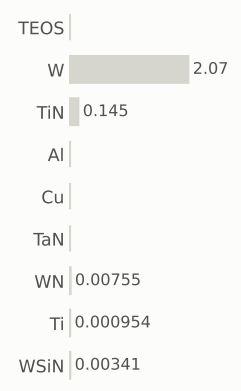

gases emitted (g)



Step #20958.7248: HAR_etch

etch_noop · HAR_etch

1.04	2,315.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

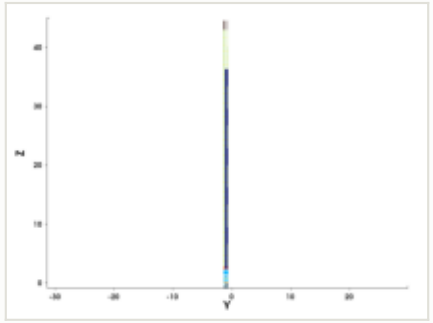

y cut at -1.035 µm

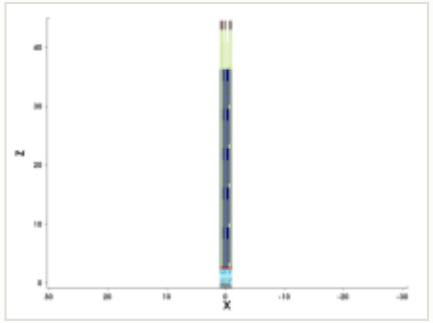

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

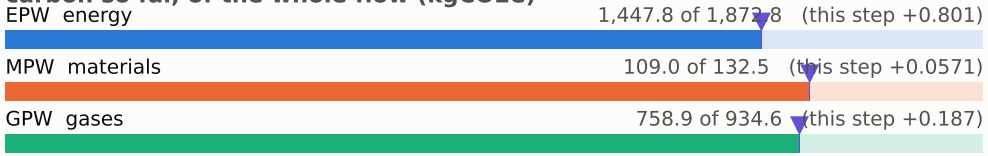

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

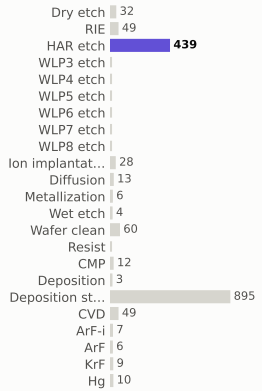

materials deposited (g)

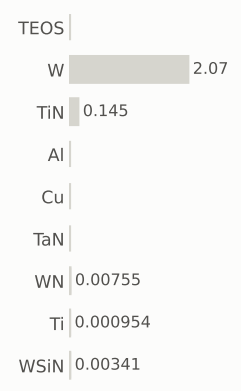

gases emitted (g)

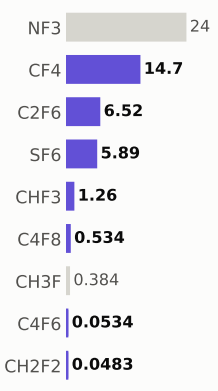

Step #20958.7919: HAR_etch

etch_noop · HAR_etch

1.04	2,316.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

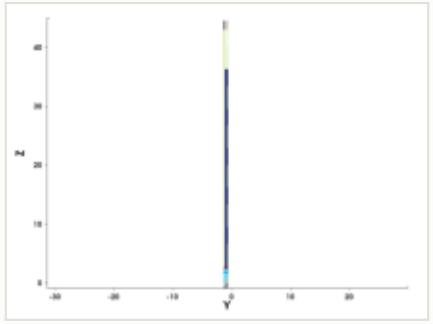

y cut at -1.035 µm

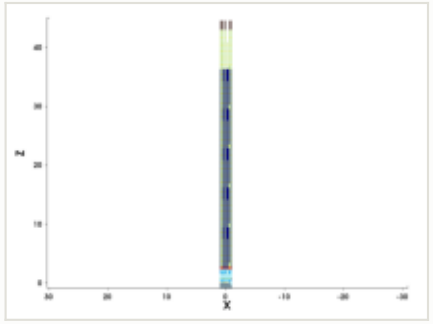

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

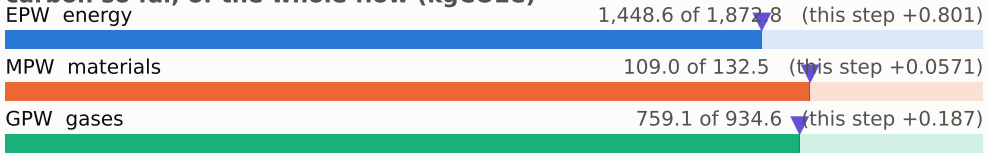

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

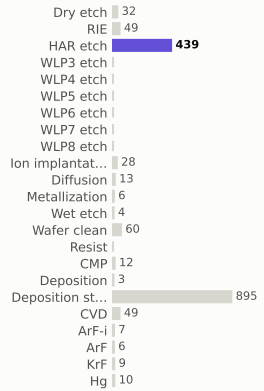

materials deposited (g)

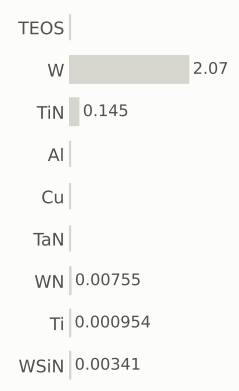

gases emitted (g)



Step #20958.8591: HAR_etch

etch_noop · HAR_etch

1.04	2,317.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

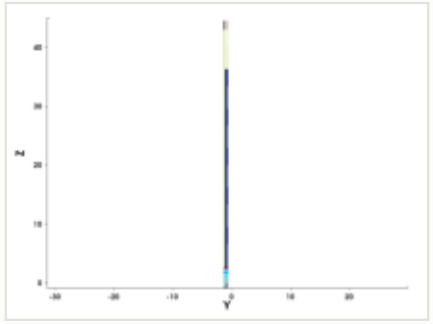

y cut at -1.035 µm

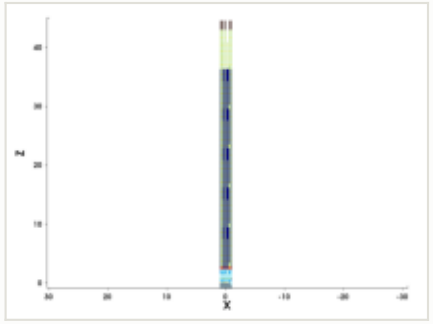

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

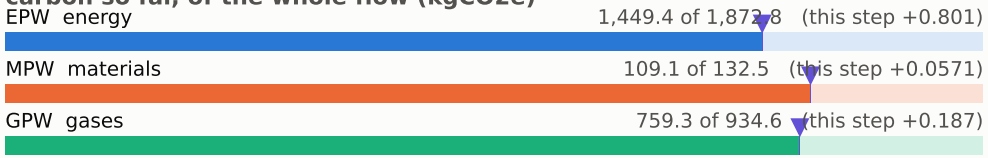

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

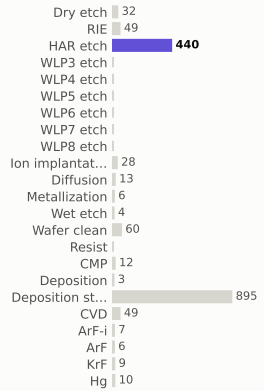

materials deposited (g)

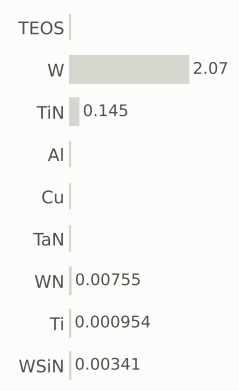

gases emitted (g)



Step #20958.9262: HAR_etch

etch_noop · HAR_etch

1.04	2,318.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

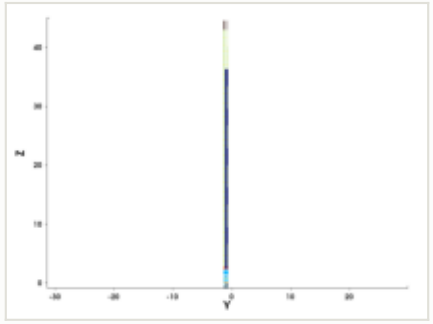

y cut at -1.035 µm

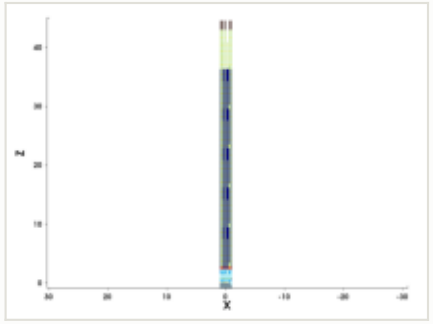

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

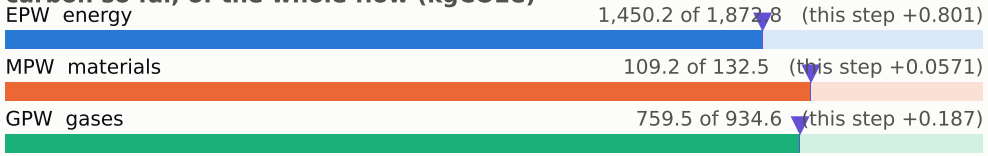

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

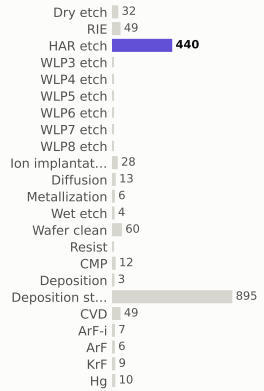

materials deposited (g)

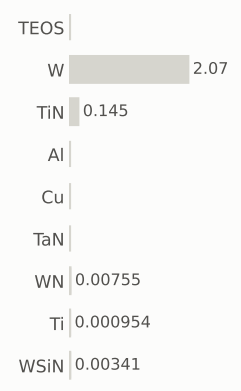

gases emitted (g)



Step #20958.9933: HAR_etch

etch_noop · HAR_etch

1.04	2,319.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

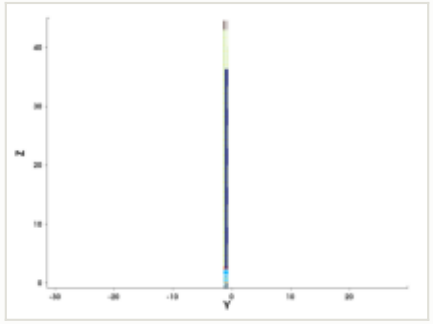

y cut at -1.035 µm

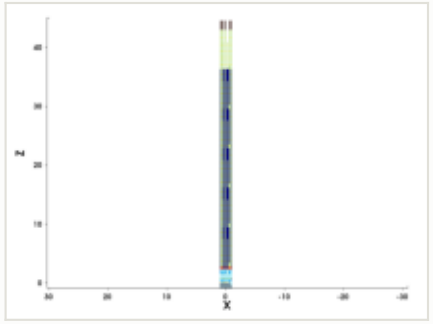

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

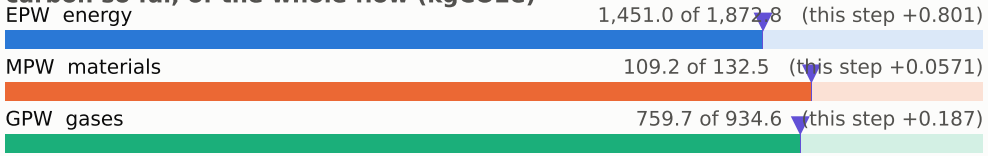

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

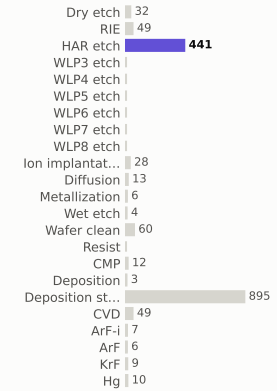

materials deposited (g)

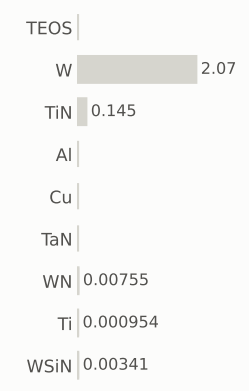

gases emitted (g)



Step #20959.0604: HAR_etch

etch_noop · HAR_etch

1.04	2,320.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

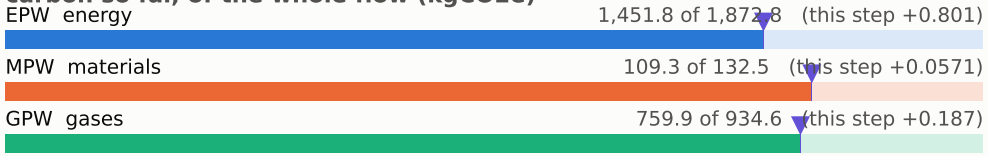

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

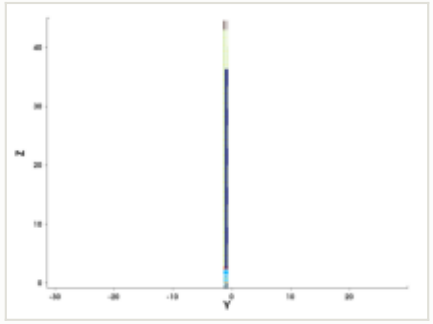

y cut at -1.035 µm

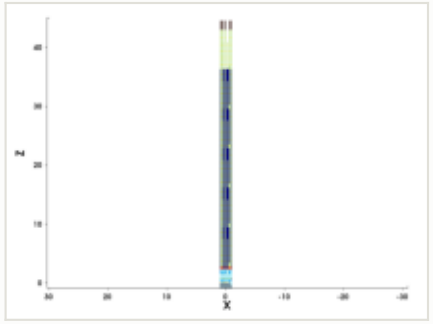

mask for this step

no mask for this step

steps by process area

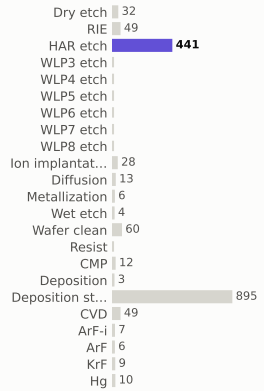

materials deposited (g)

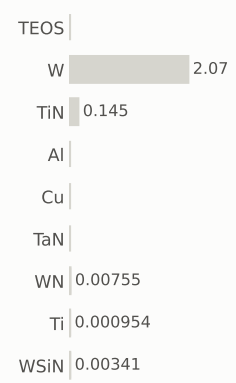

gases emitted (g)



Step #20959.1275: HAR_etch

etch_noop · HAR_etch

1.04	2,321.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

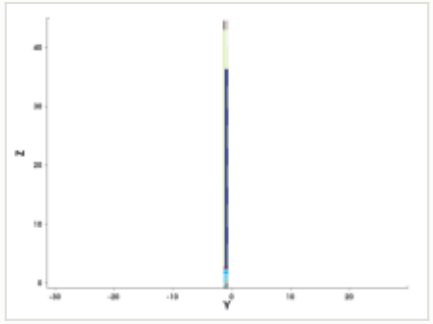

y cut at -1.035 µm

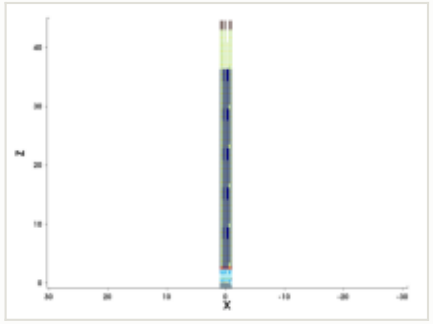

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

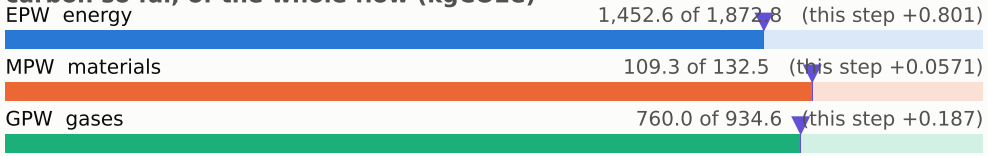

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

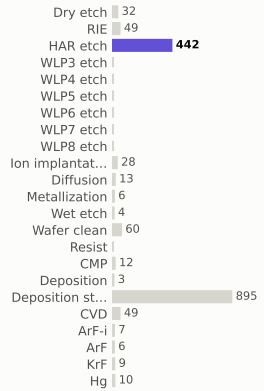

materials deposited (g)

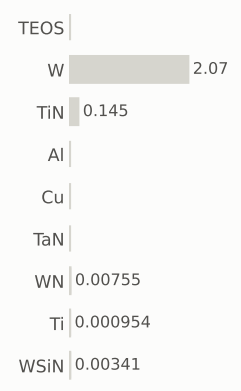

gases emitted (g)



Step #20959.1946: HAR_etch

etch_noop · HAR_etch

1.04	2,323.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

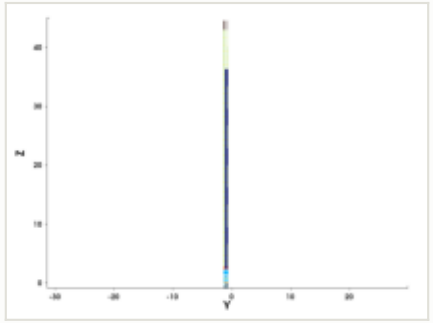

y cut at -1.035 µm

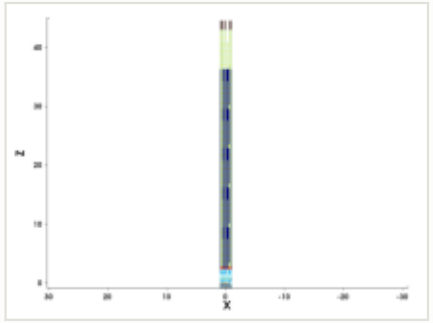

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

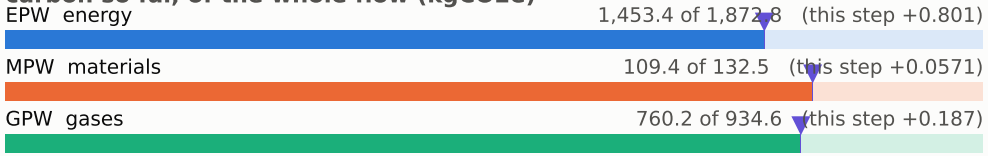

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

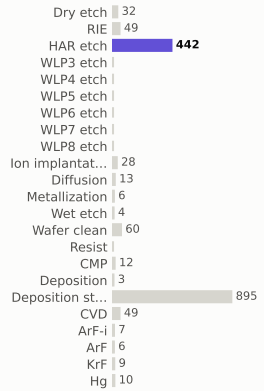

materials deposited (g)

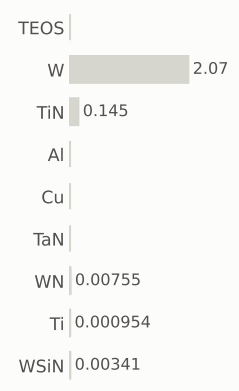

gases emitted (g)



Step #20959.2617: HAR_etch

etch_noop · HAR_etch

1.04	2,324.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

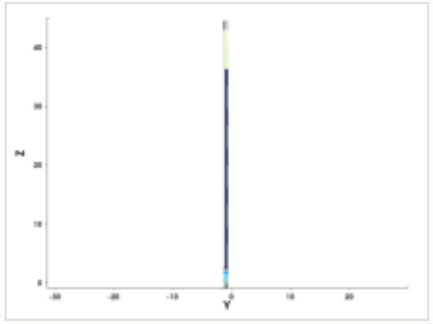

y cut at -1.035 µm

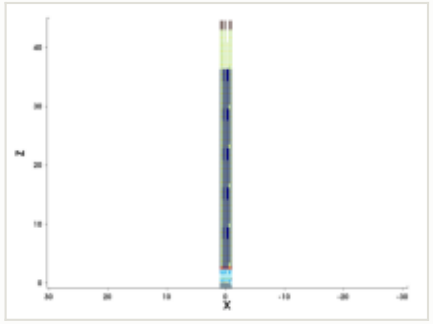

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

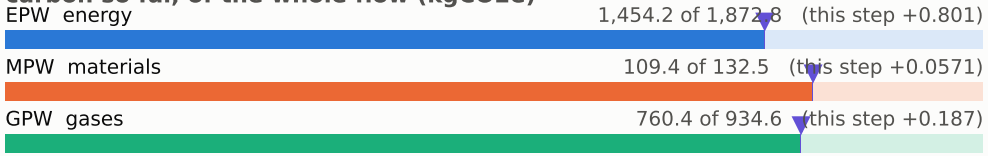

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

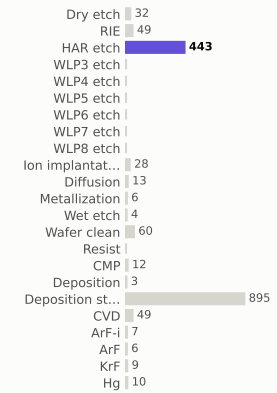

materials deposited (g)

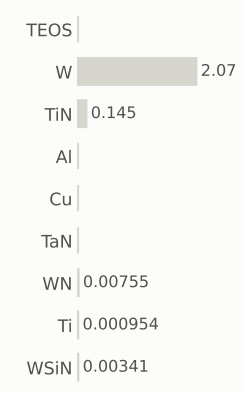

gases emitted (g)

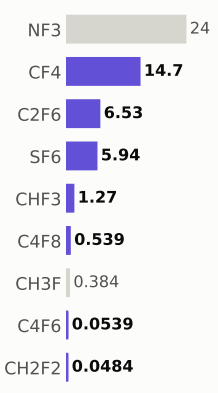

Step #20959.3289: HAR_etch

etch_noop · HAR_etch

1.04	2,325.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

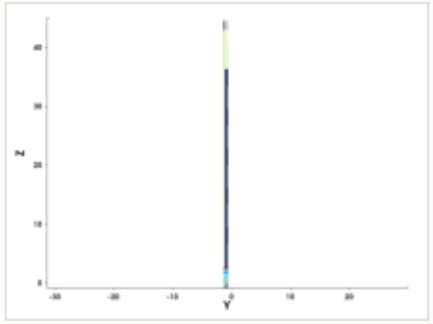

y cut at -1.035 µm

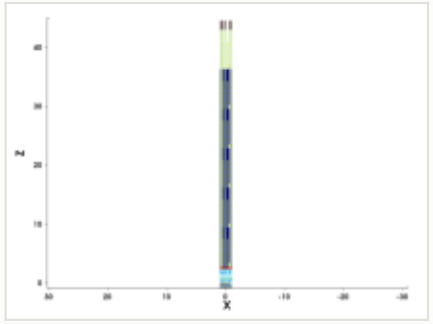

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

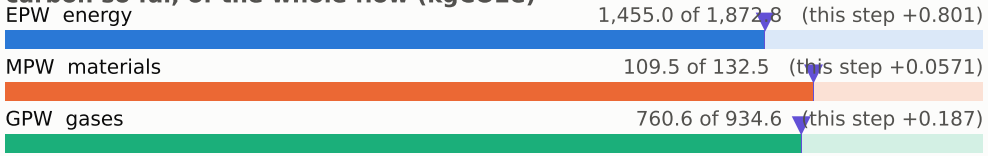

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

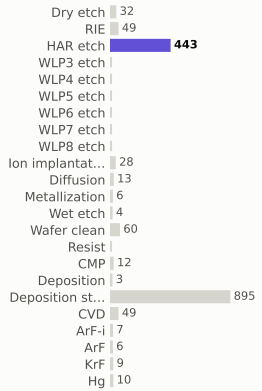

materials deposited (g)

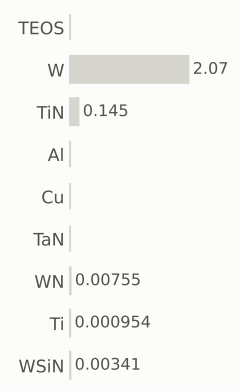

gases emitted (g)

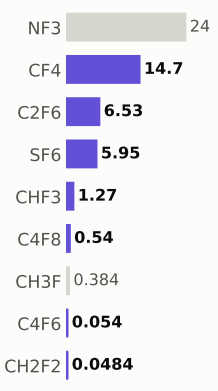

Step #20959.396: HAR_etch

etch_noop · HAR_etch

1.04	2,326.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

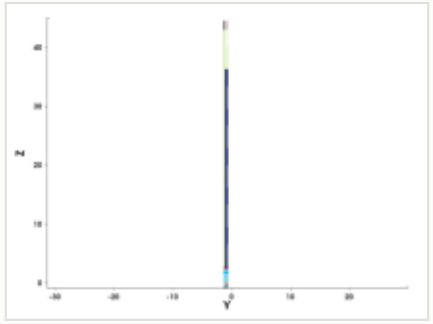

y cut at -1.035 µm

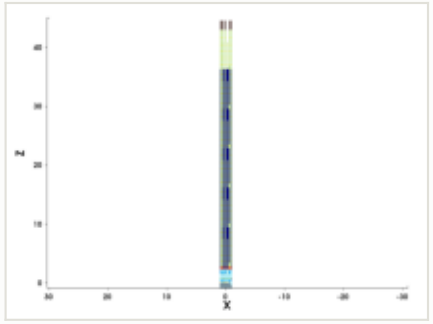

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

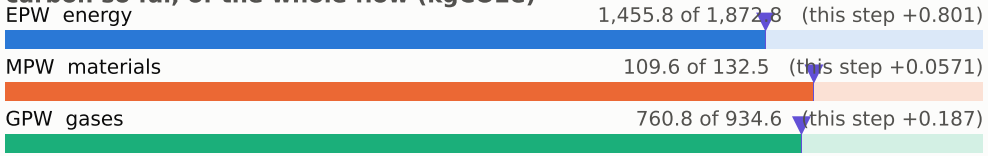

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

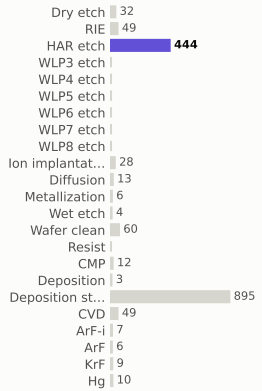

materials deposited (g)

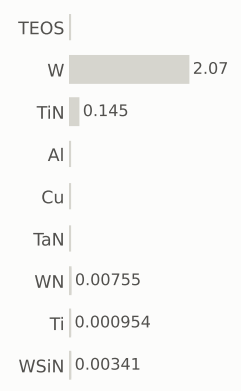

gases emitted (g)



Step #20959.4631: HAR_etch

etch_noop · HAR_etch

1.04	2,327.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

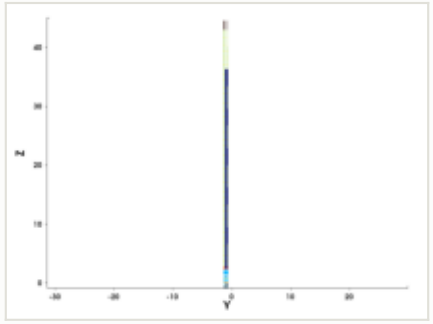

y cut at -1.035 µm

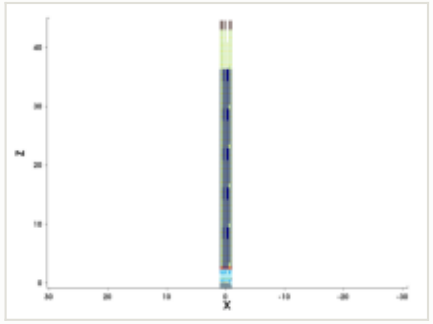

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

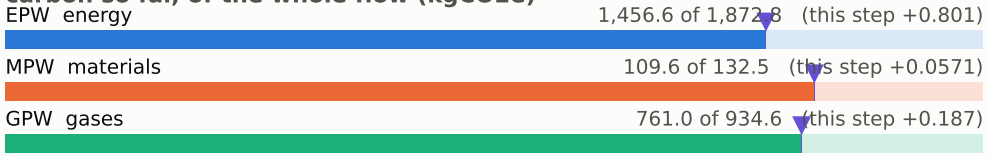

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

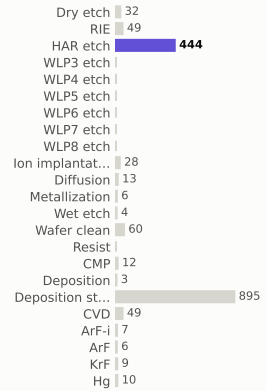

materials deposited (g)

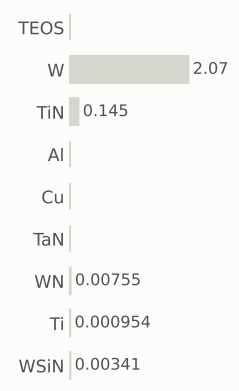

gases emitted (g)



Step #20959.5302: HAR_etch

etch_noop · HAR_etch

1.04	2,328.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

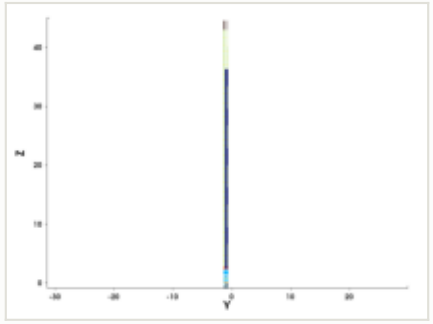

y cut at -1.035 µm

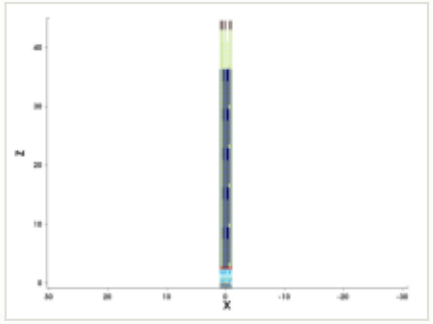

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

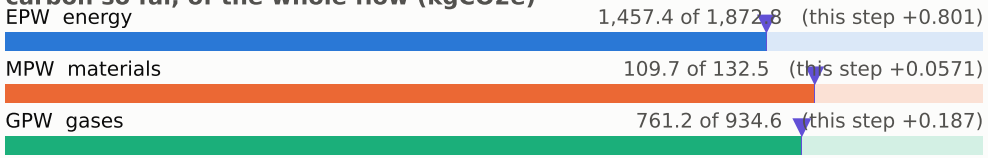

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

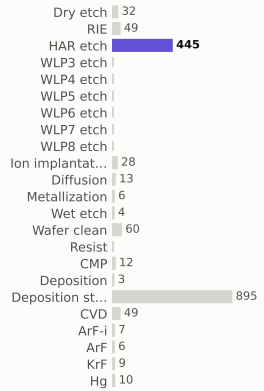

materials deposited (g)

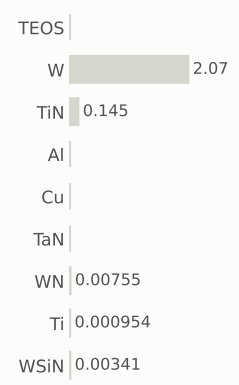

gases emitted (g)



Step #20959.5973: HAR_etch

etch_noop · HAR_etch

1.04	2,329.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

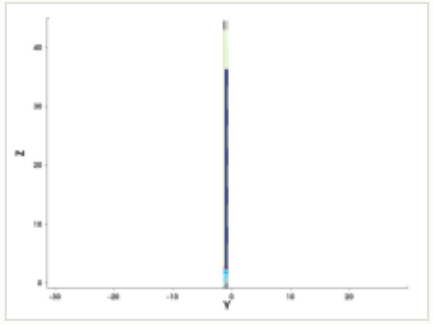

y cut at -1.035 µm

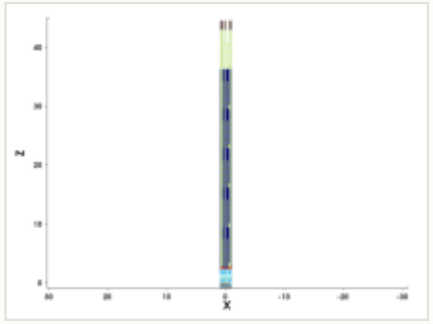

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

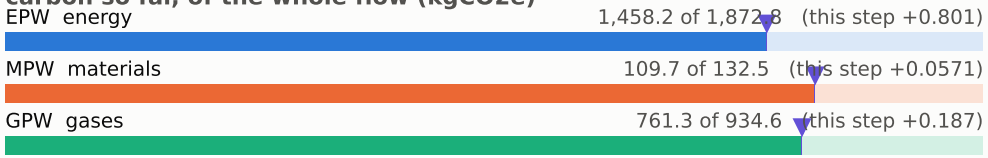

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

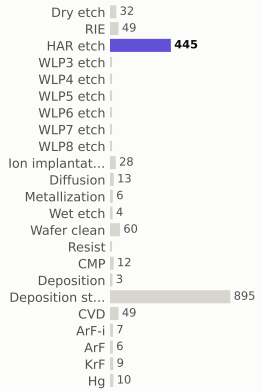

materials deposited (g)

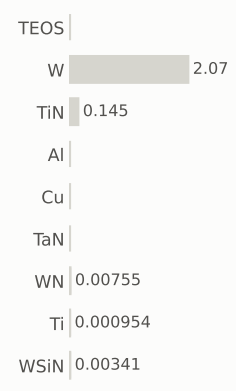

gases emitted (g)

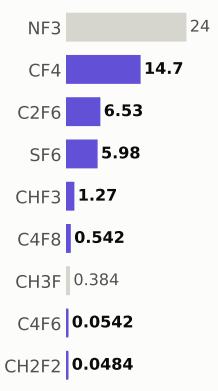

Step #20959.6644: HAR_etch

etch_noop · HAR_etch

1.04	2,330.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

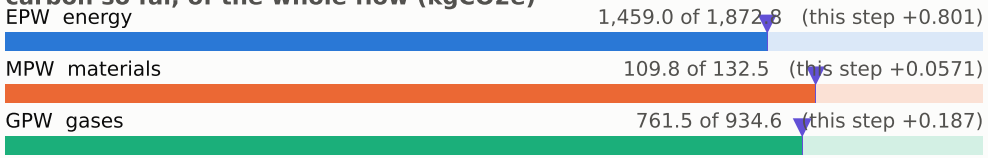

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

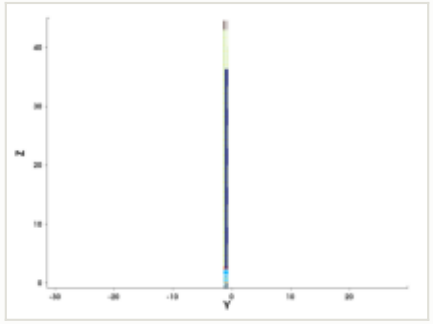

y cut at -1.035 µm

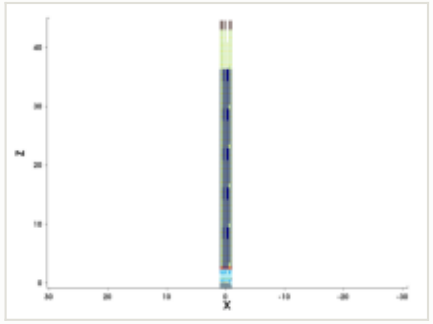

mask for this step

no mask for this step

steps by process area

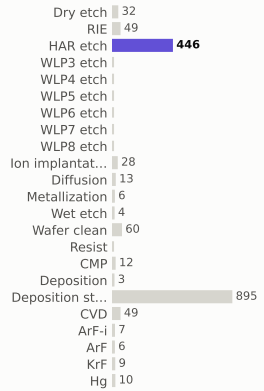

materials deposited (g)

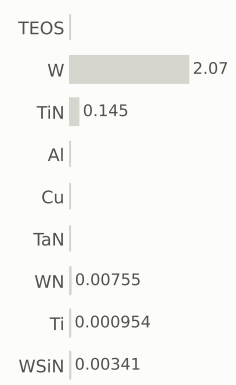

gases emitted (g)



Step #20959.7315: HAR_etch

etch_noop · HAR_etch

1.04	2,331.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

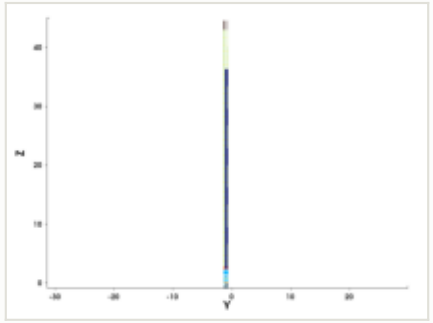

y cut at -1.035 µm

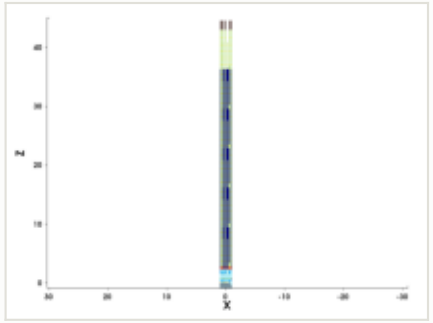

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

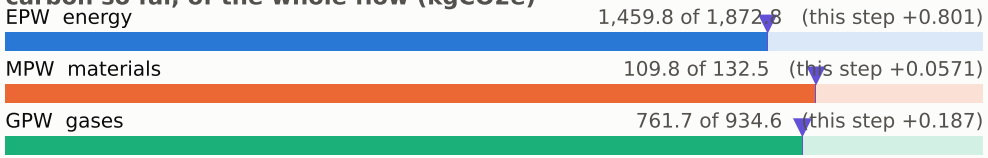

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

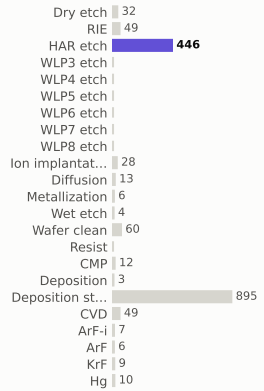

materials deposited (g)

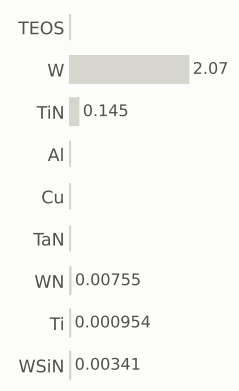

gases emitted (g)



Step #20959.7987: HAR_etch

etch_noop · HAR_etch

1.04	2,332.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

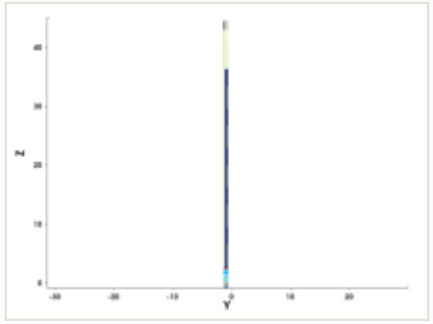

y cut at -1.035 µm

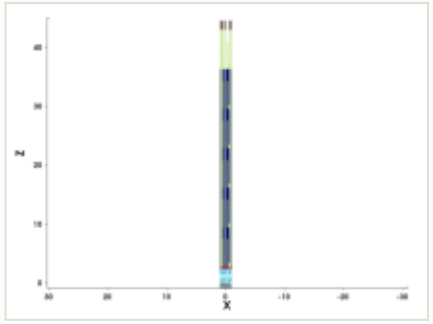

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

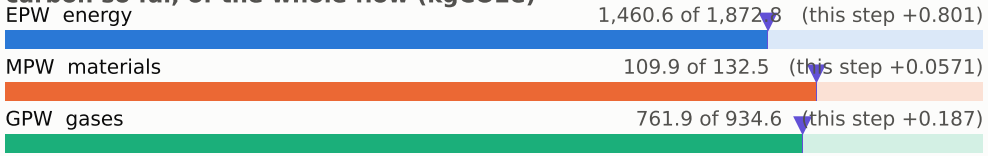

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

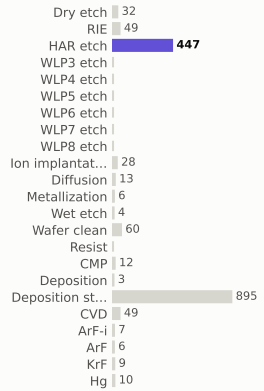

materials deposited (g)

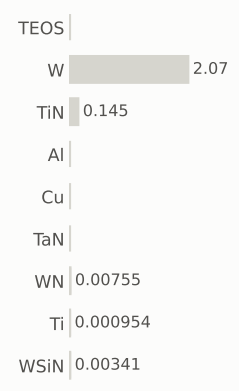

gases emitted (g)



Step #20959.8658: HAR_etch

etch_noop · HAR_etch

1.04	2,333.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

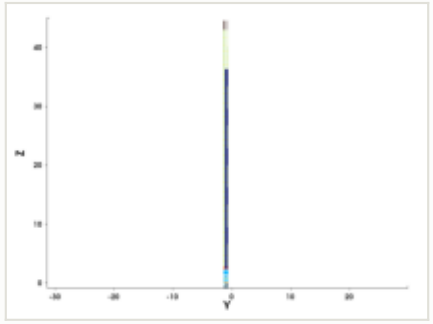

y cut at -1.035 µm

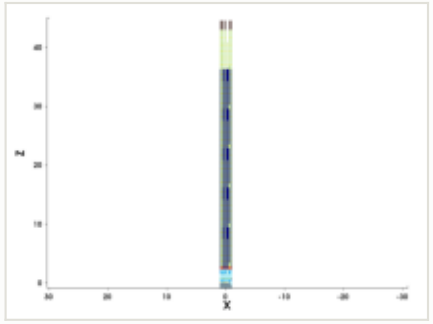

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

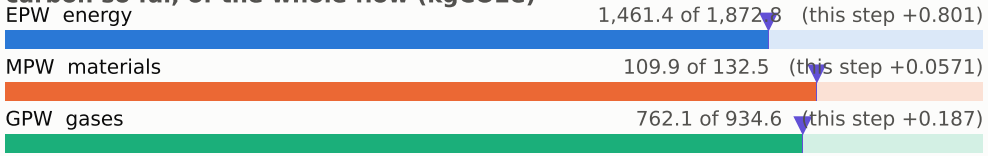

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

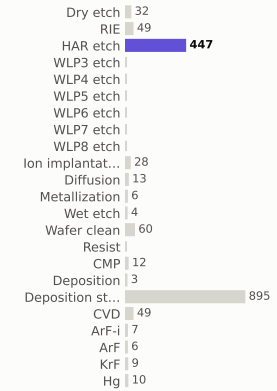

materials deposited (g)

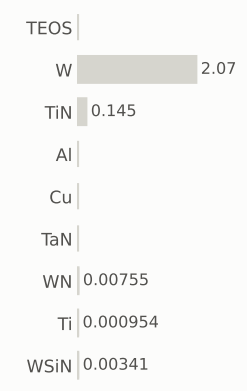

gases emitted (g)



Step #20959.9329: HAR_etch

etch_noop · HAR_etch

1.04	2,334.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

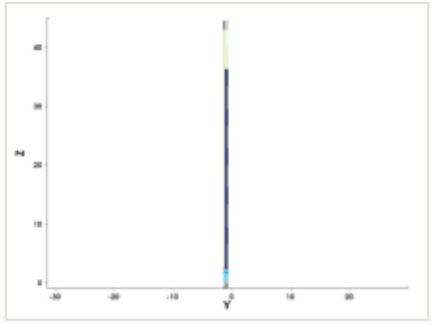

y cut at -1.035 µm

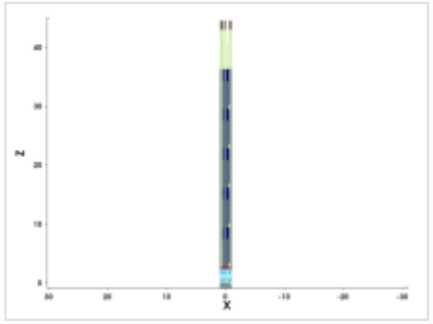

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

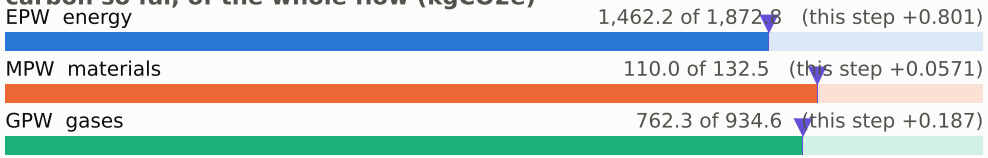

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

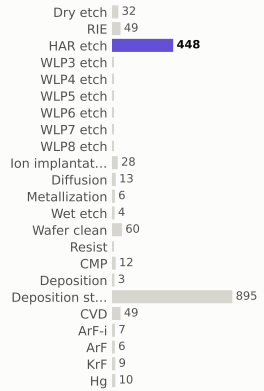

materials deposited (g)

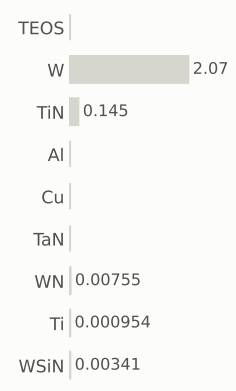

gases emitted (g)

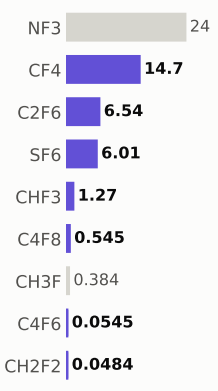

Step #20960: Dry_etch

etch_strip · Dry_etch

0.801	2,335.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

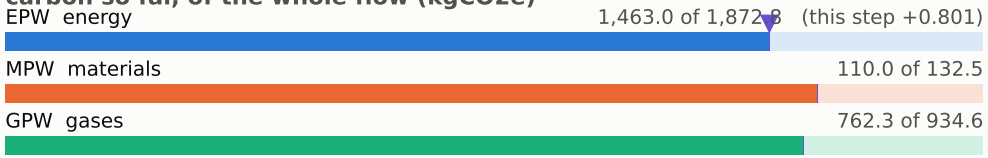

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

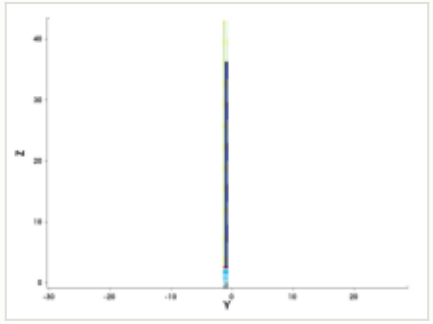

y cut at -1.035 µm

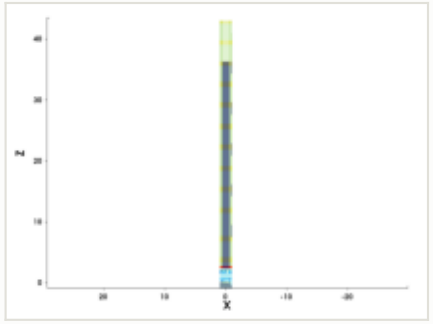

mask for this step

no mask for this step

steps by process area

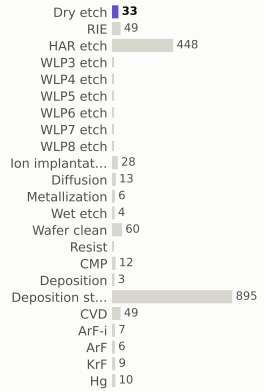

materials deposited (g)

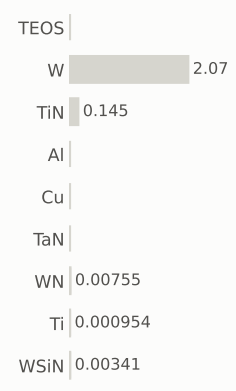

gases emitted (g)



Step #20970: Wafer_clean

clean · Wafer_clean

0.169	2,335.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

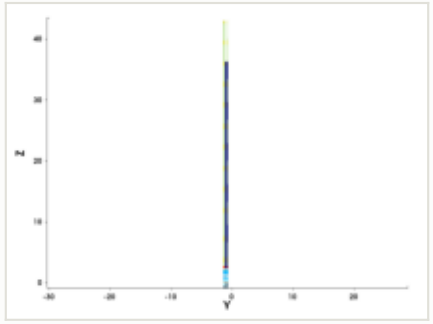

y cut at -1.035 µm

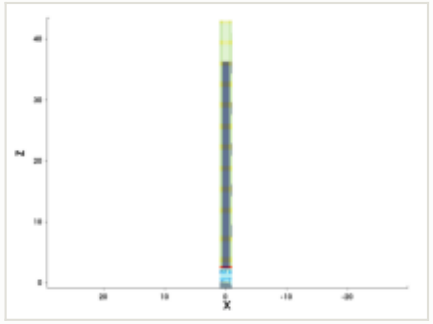

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

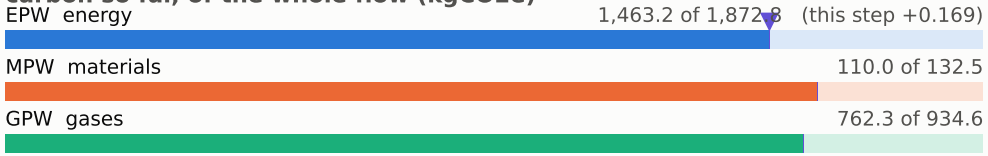

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

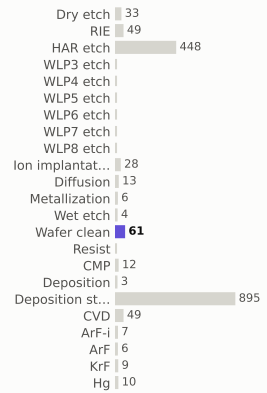

materials deposited (g)

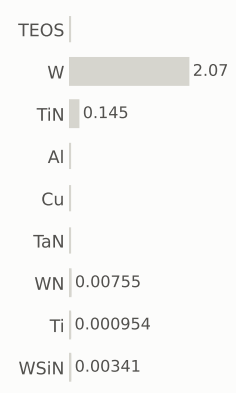

gases emitted (g)



Step #20980: CVD

depo_isotropic · CVD

1.31	2,336.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.07 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0329 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

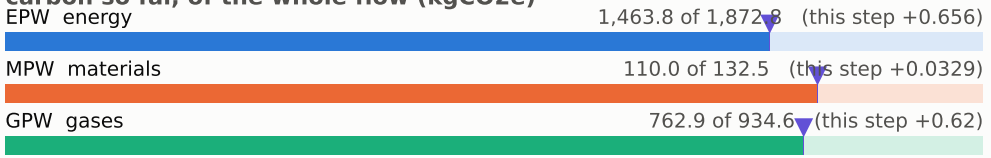

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

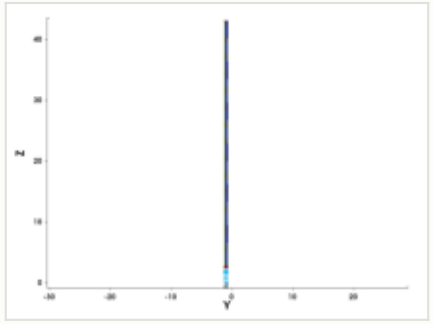

y cut at -1.035 µm

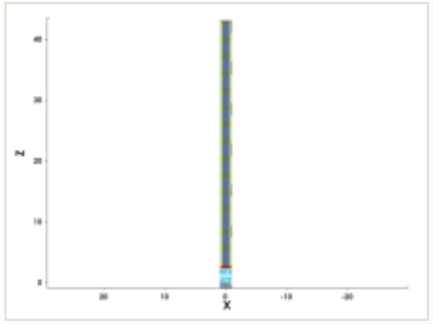

mask for this step

no mask for this step

steps by process area

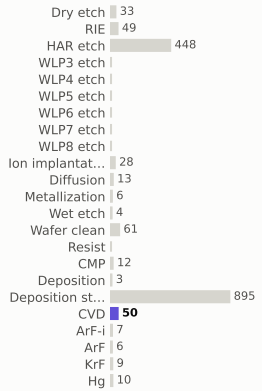

materials deposited (g)

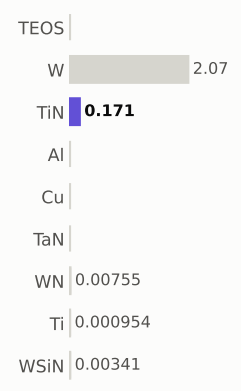

gases emitted (g)

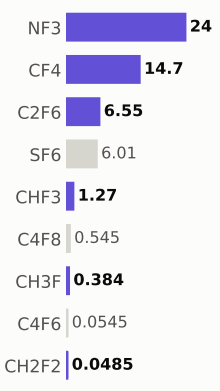

Step #20990: CMP

etch_cmp · CMP

0.169	2,336.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

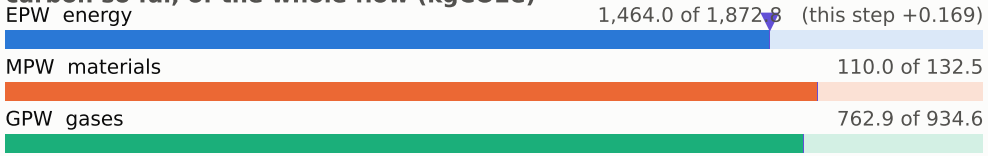

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

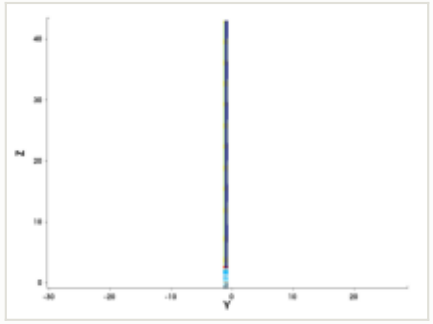

y cut at -1.035 µm

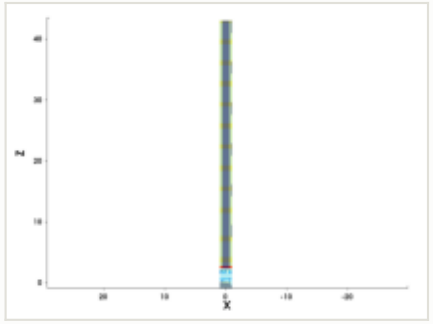

mask for this step

no mask for this step

steps by process area

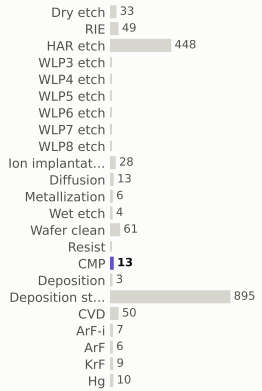

materials deposited (g)

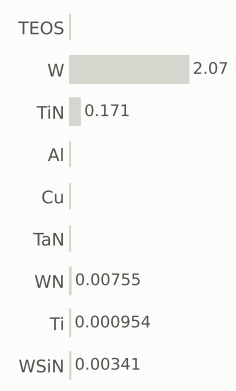

gases emitted (g)



Step #21000: Wafer_clean

clean · Wafer_clean

0.169	2,337.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

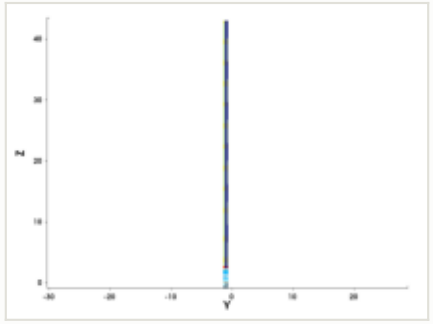

y cut at -1.035 µm

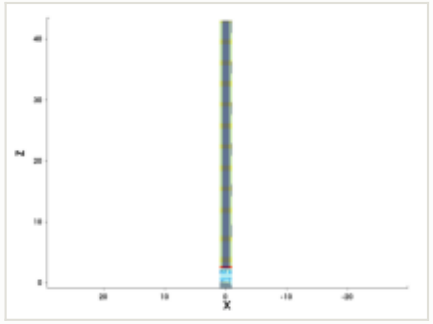

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

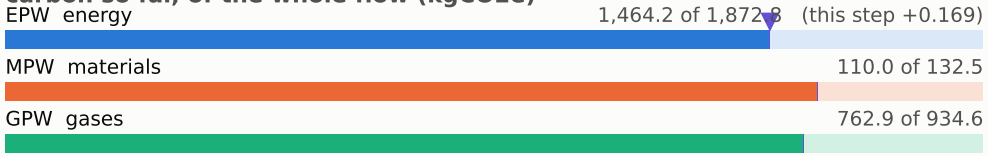

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

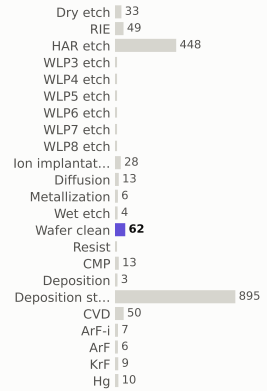

materials deposited (g)

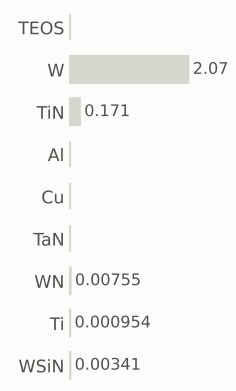

gases emitted (g)



Step #21010: Wafer_clean

clean · Wafer_clean

0.169	2,337.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

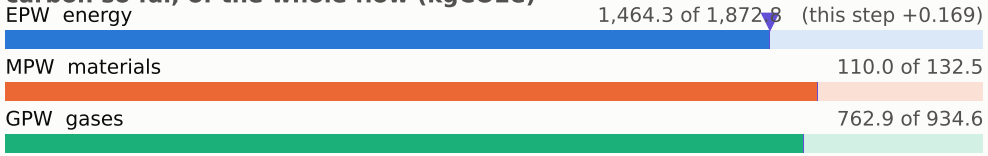

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

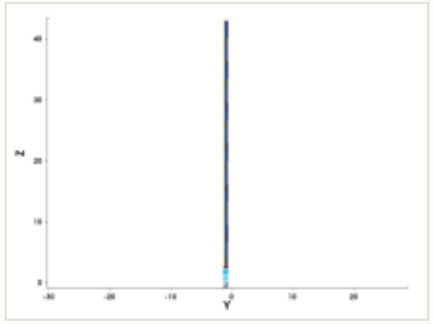

y cut at -1.035 µm

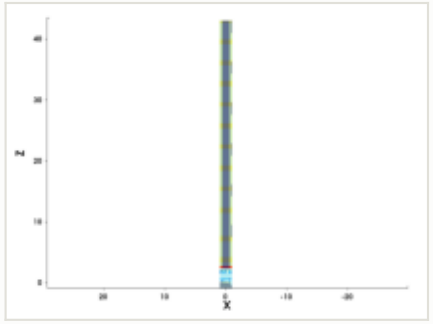

mask for this step

no mask for this step

steps by process area

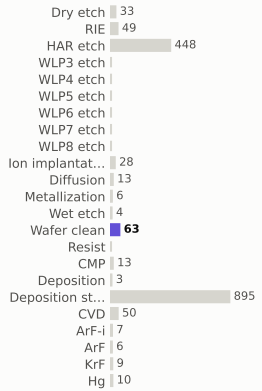

materials deposited (g)

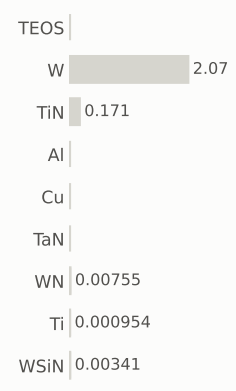

gases emitted (g)



Step #21020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,337.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

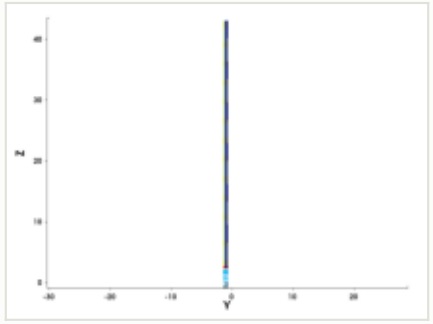

y cut at -1.035 µm

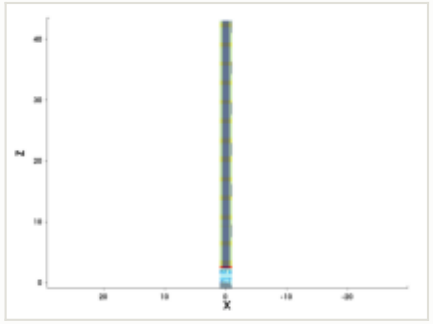

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

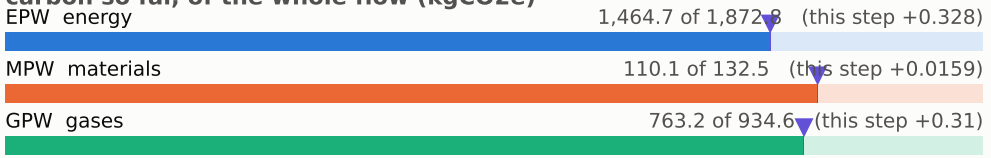

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

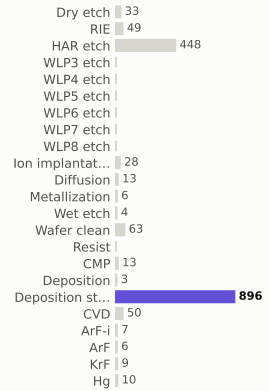

materials deposited (g)

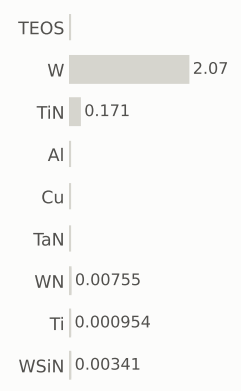

gases emitted (g)

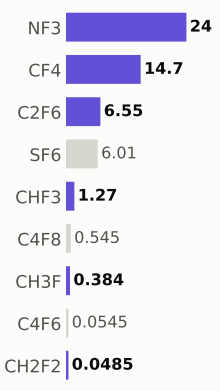

Step #21030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,338.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

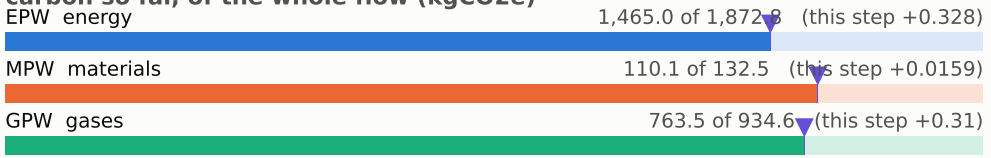

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

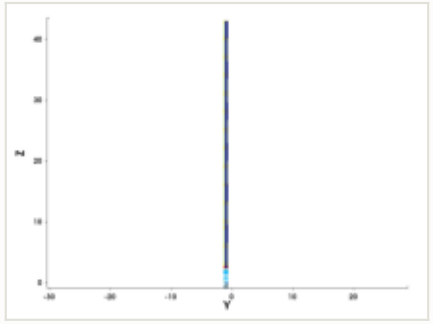

y cut at -1.035 µm

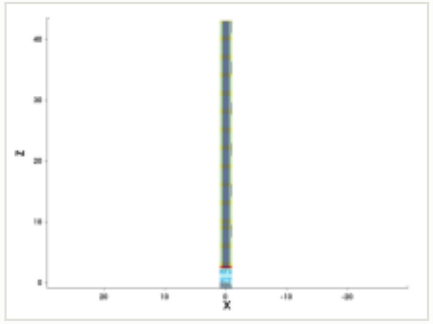

mask for this step

no mask for this step

steps by process area

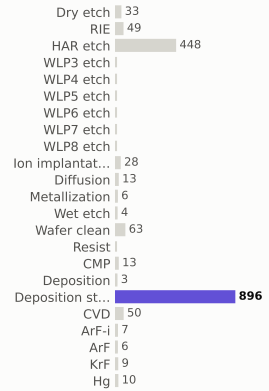

materials deposited (g)

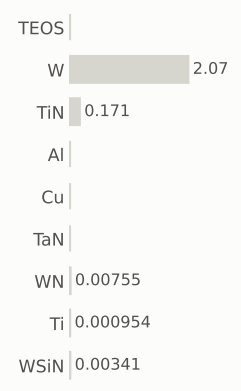

gases emitted (g)

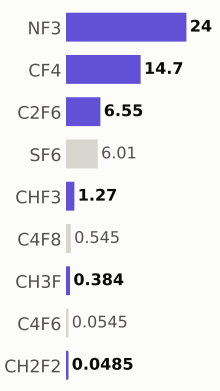

Step #21040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,339.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

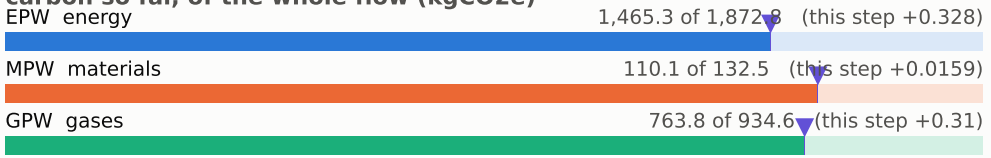

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

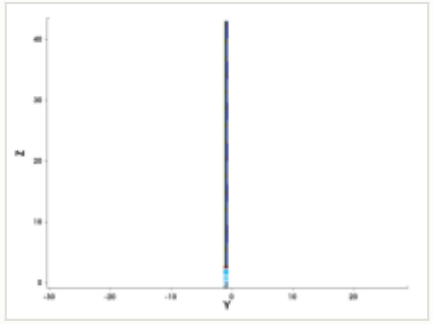

y cut at -1.035 µm

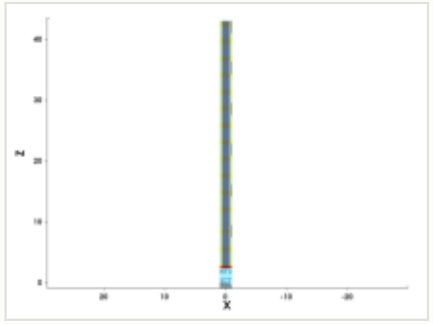

mask for this step

no mask for this step

steps by process area

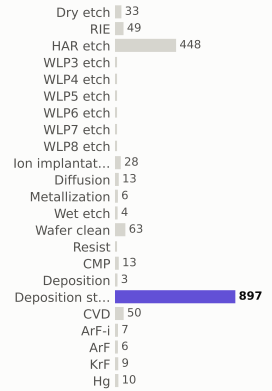

materials deposited (g)

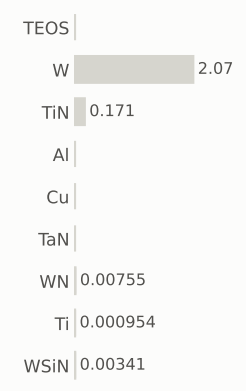

gases emitted (g)

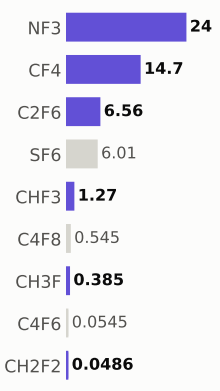

Step #21050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,339.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

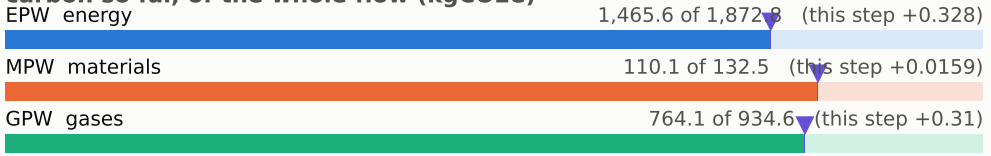

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

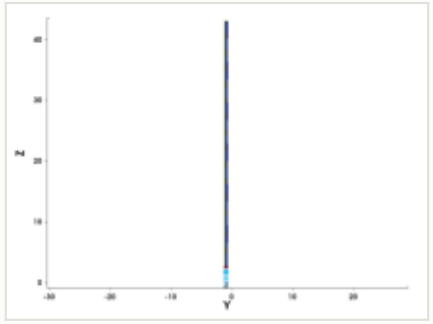

y cut at -1.035 µm

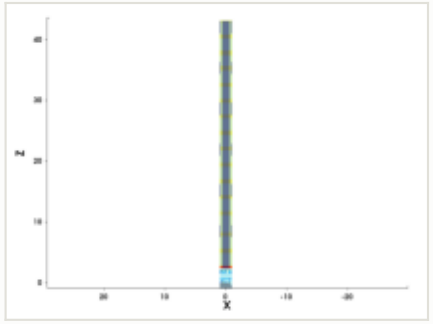

mask for this step

no mask for this step

steps by process area

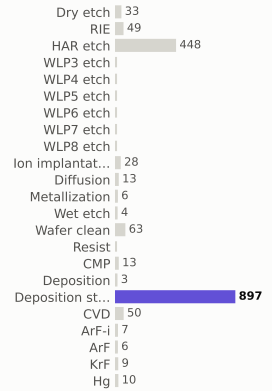

materials deposited (g)

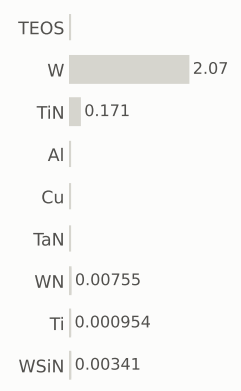

gases emitted (g)

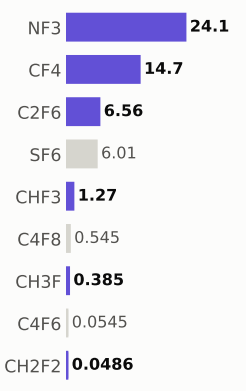

Step #21060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,340.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

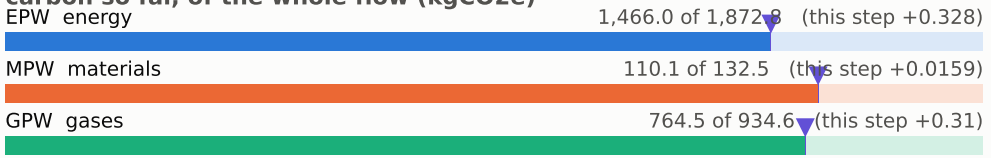

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

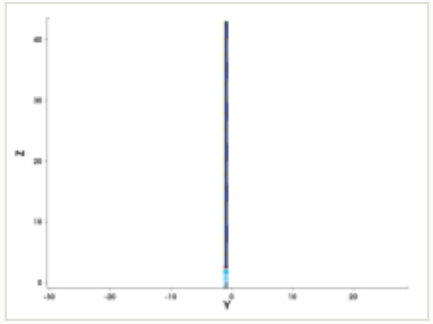

y cut at -1.035 µm

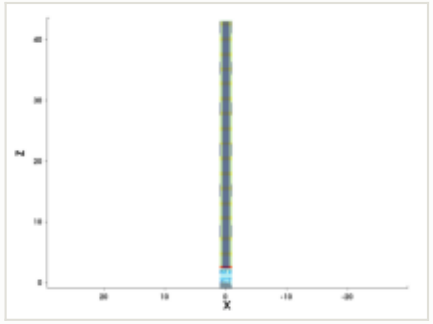

mask for this step

no mask for this step

steps by process area

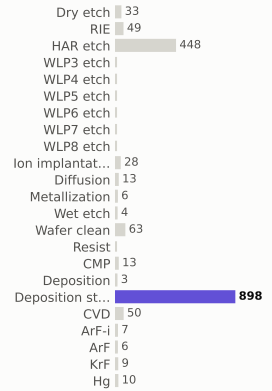

materials deposited (g)

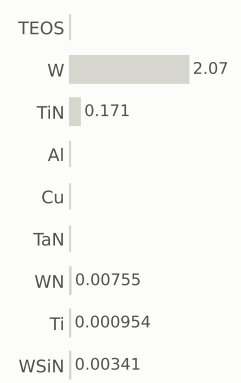

gases emitted (g)

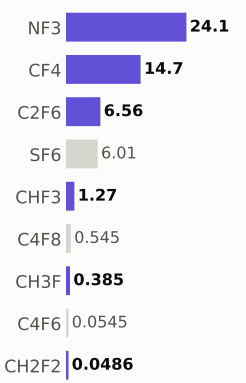

Step #21070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,341.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

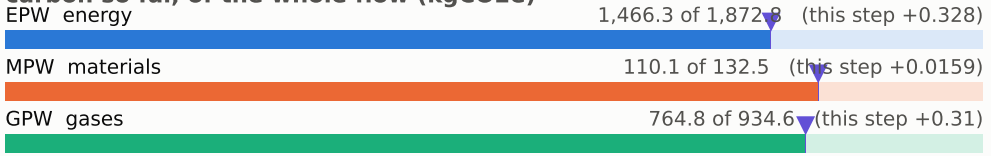

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

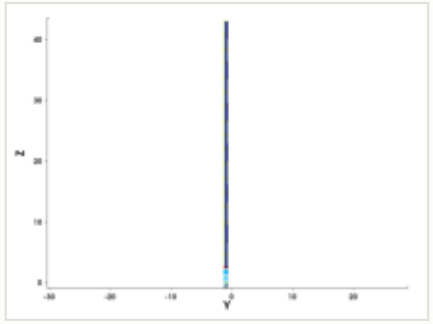

y cut at -1.035 µm

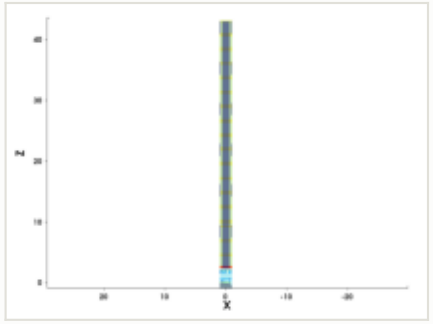

mask for this step

no mask for this step

steps by process area

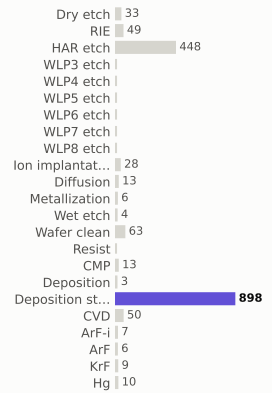

materials deposited (g)

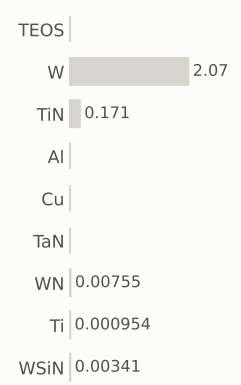

gases emitted (g)

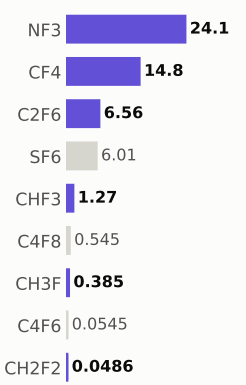

Step #21080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,341.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

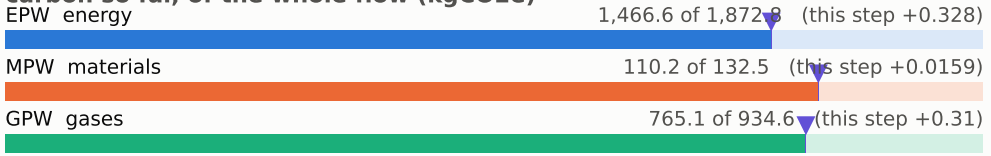

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

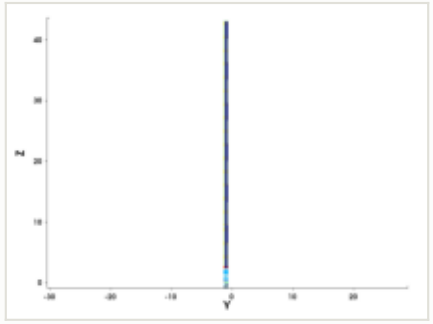

y cut at -1.035 µm

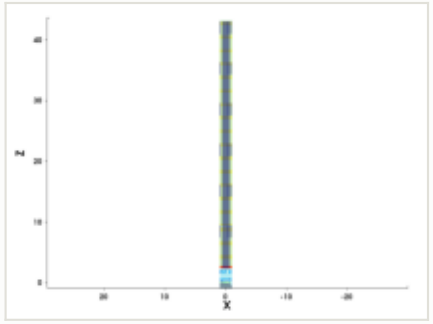

mask for this step

no mask for this step

steps by process area

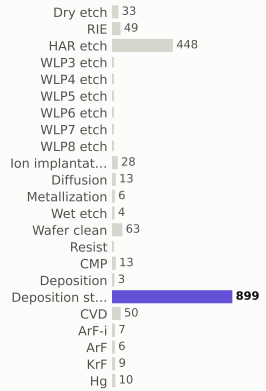

materials deposited (g)

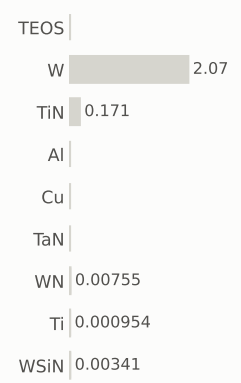

gases emitted (g)

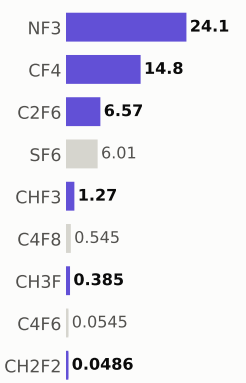

Step #21090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,342.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

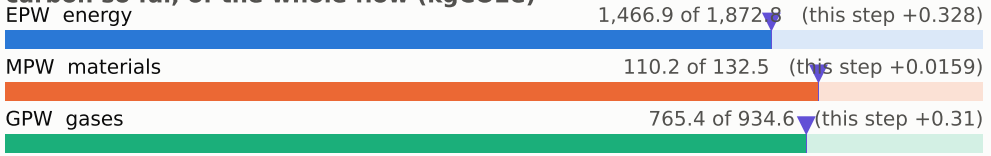

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

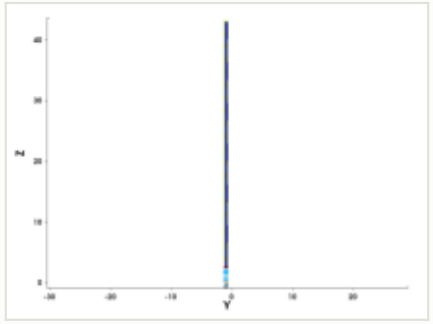

y cut at -1.035 µm

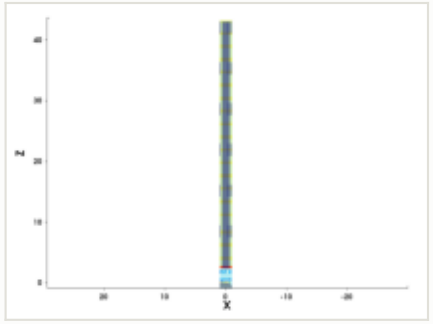

mask for this step

no mask for this step

steps by process area

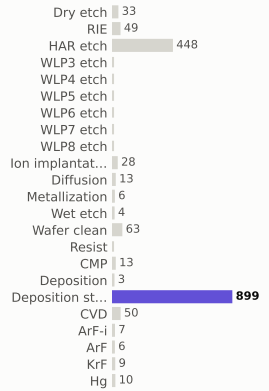

materials deposited (g)

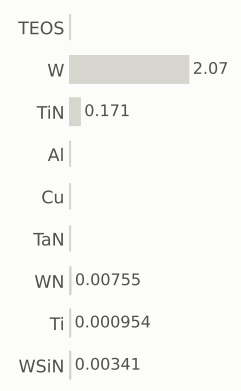

gases emitted (g)

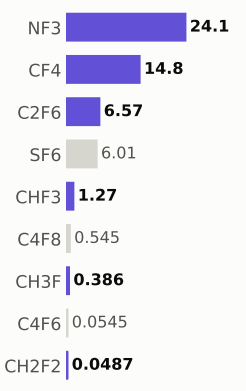

Step #21100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,343.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

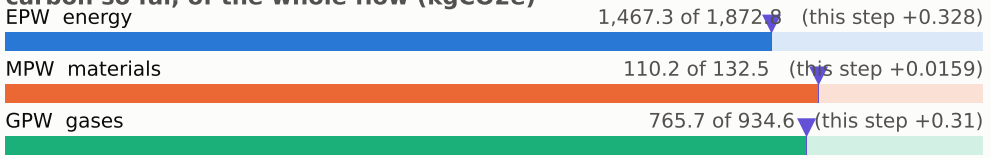

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

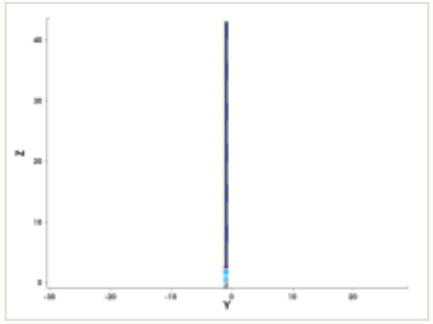

y cut at -1.035 µm

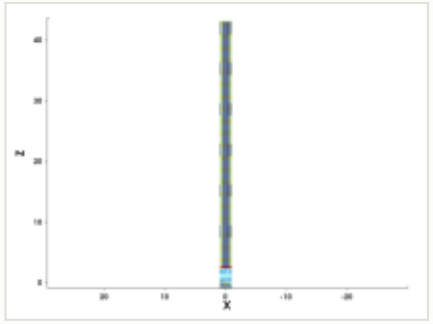

mask for this step

no mask for this step

steps by process area

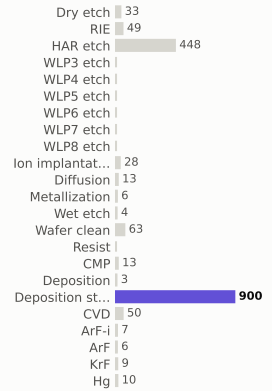

materials deposited (g)

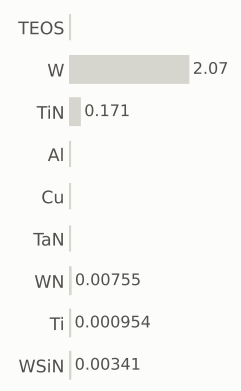

gases emitted (g)

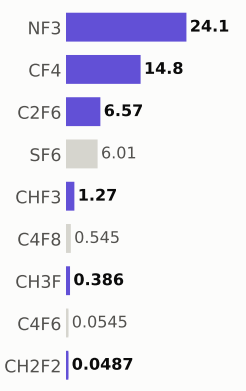

Step #21110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,343.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

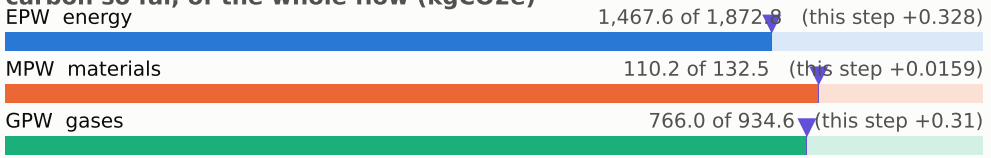

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

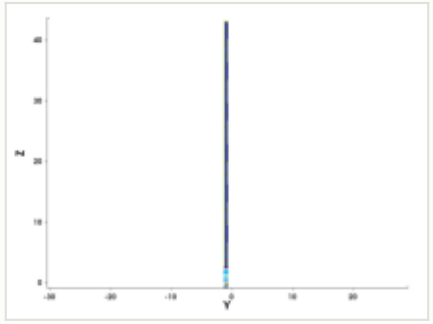

y cut at -1.035 µm

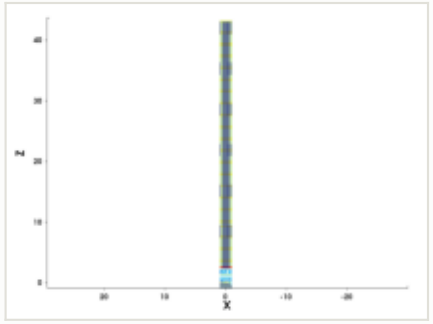

mask for this step

no mask for this step

steps by process area

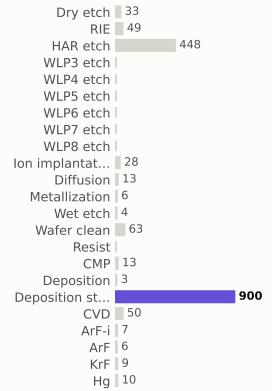

materials deposited (g)

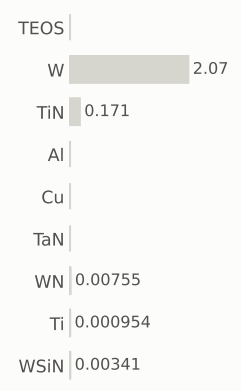

gases emitted (g)

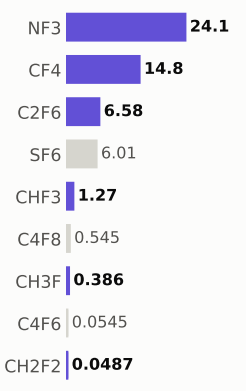

Step #21120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,344.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

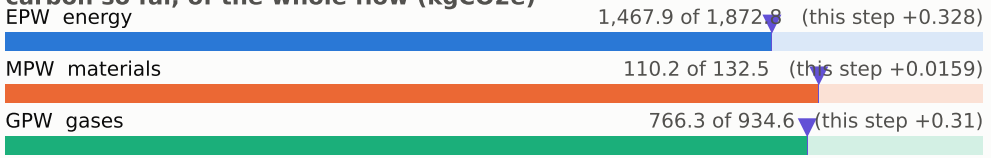

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

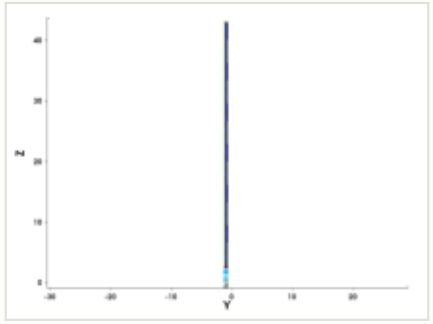

y cut at -1.035 µm

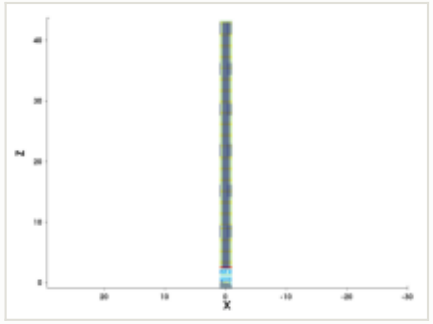

mask for this step

no mask for this step

steps by process area

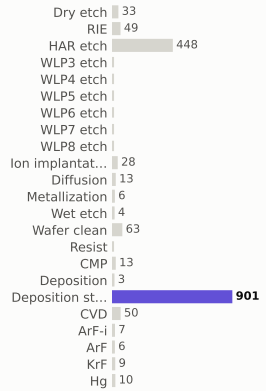

materials deposited (g)

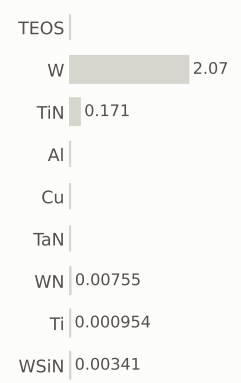

gases emitted (g)

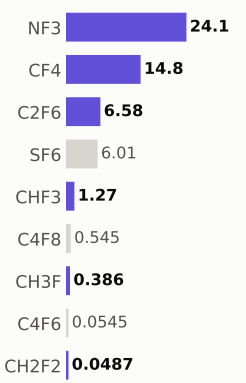

Step #21130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,345.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

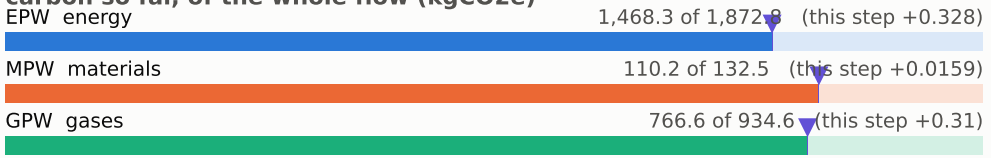

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

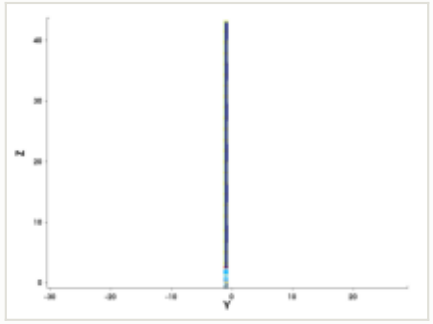

y cut at -1.035 µm

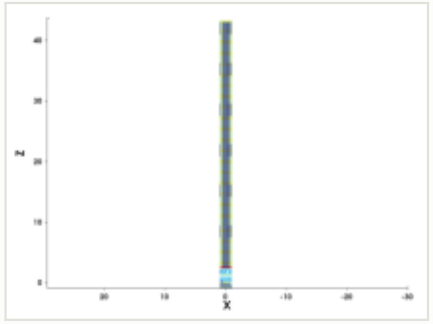

mask for this step

no mask for this step

steps by process area

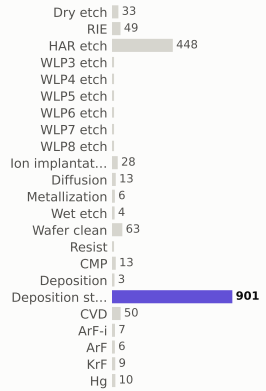

materials deposited (g)

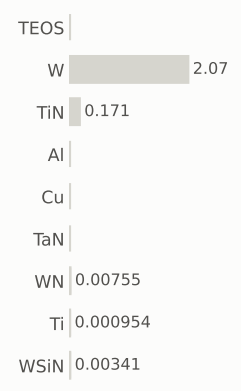

gases emitted (g)

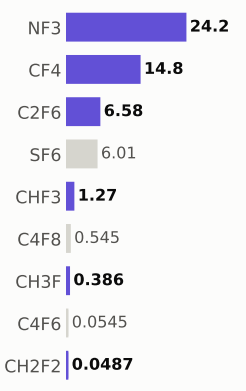

Step #21140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,345.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

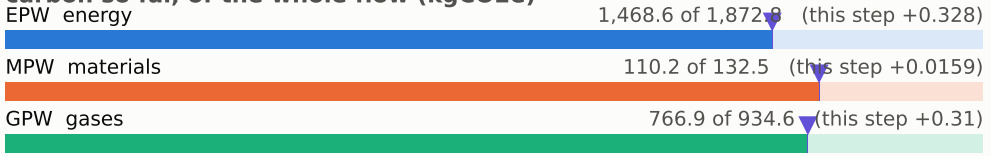

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

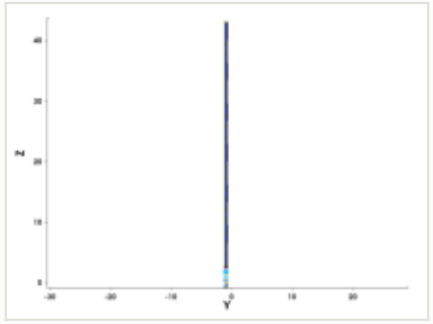

y cut at -1.035 µm

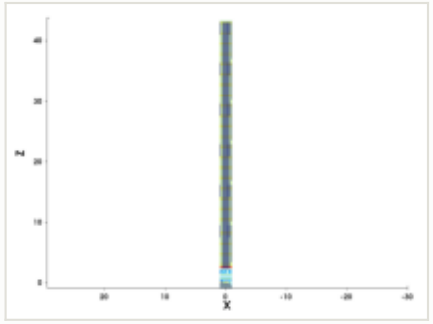

mask for this step

no mask for this step

steps by process area

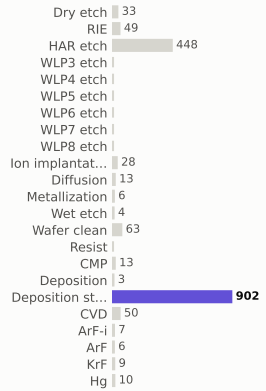

materials deposited (g)

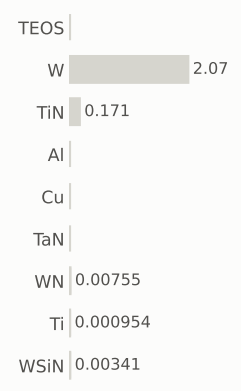

gases emitted (g)

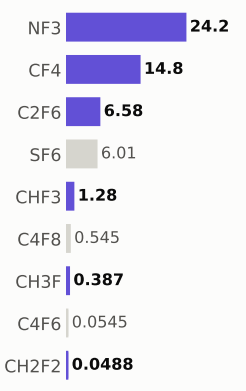

Step #21150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,346.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

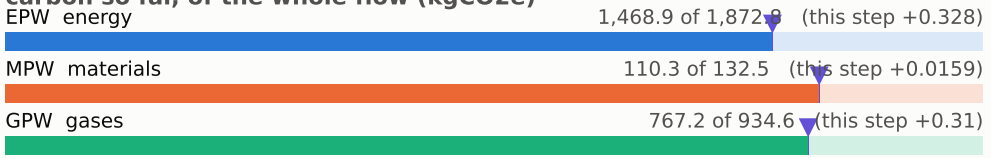

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

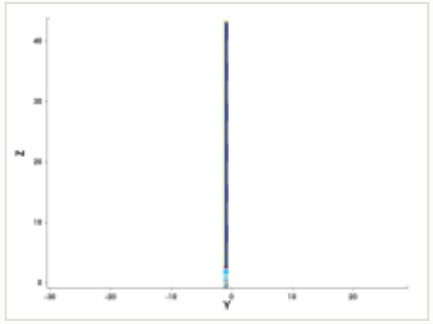

y cut at -1.035 µm

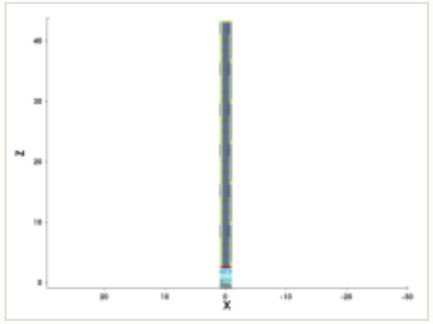

mask for this step

no mask for this step

steps by process area

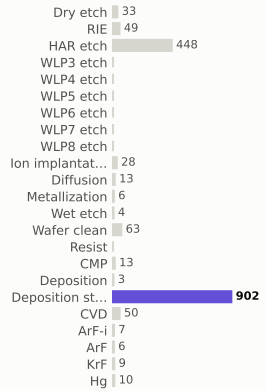

materials deposited (g)

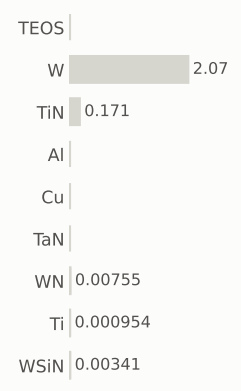

gases emitted (g)

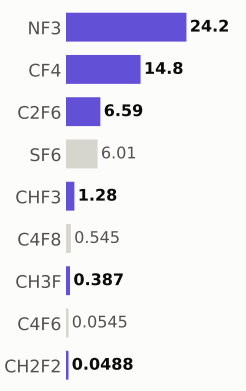

Step #21160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,347.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

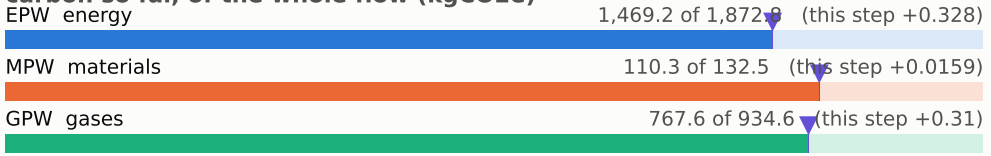

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

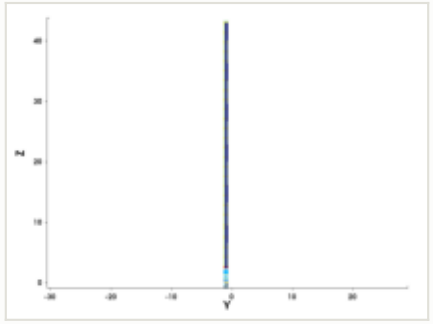

y cut at -1.035 µm

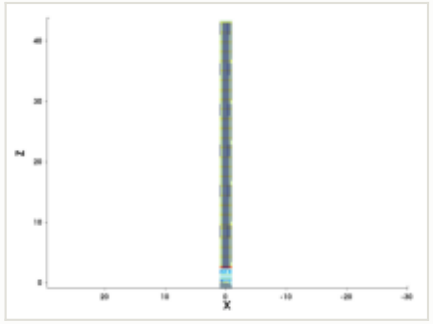

mask for this step

no mask for this step

steps by process area

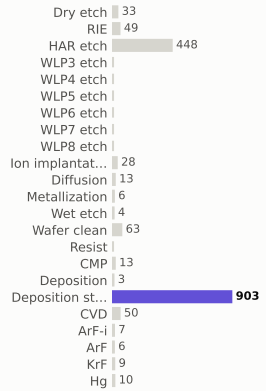

materials deposited (g)

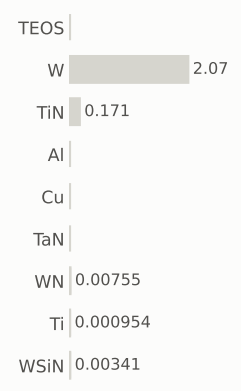

gases emitted (g)

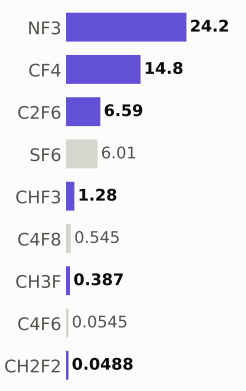

Step #21170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,347.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

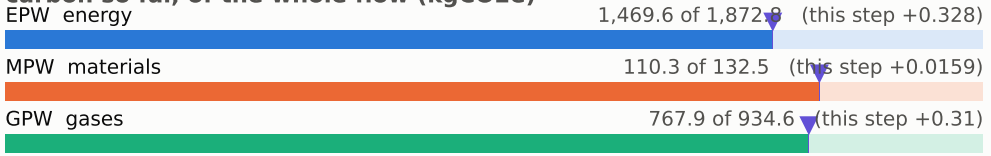

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

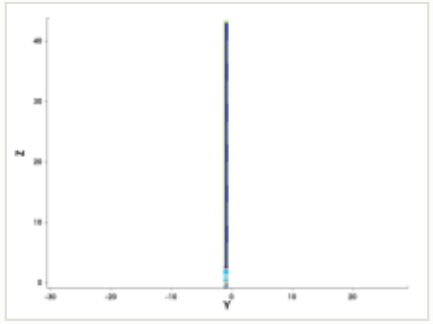

y cut at -1.035 µm

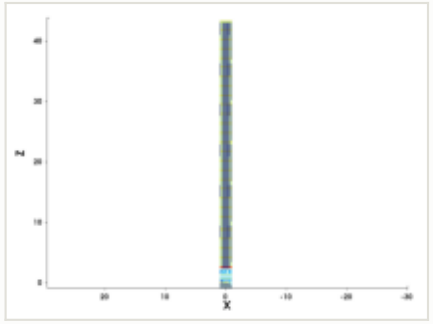

mask for this step

no mask for this step

steps by process area

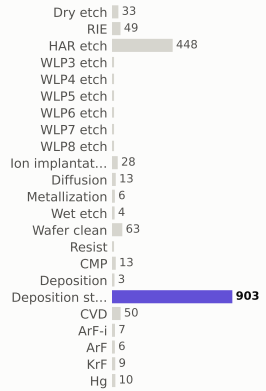

materials deposited (g)

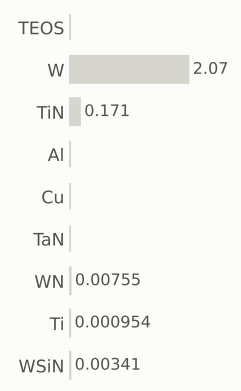

gases emitted (g)

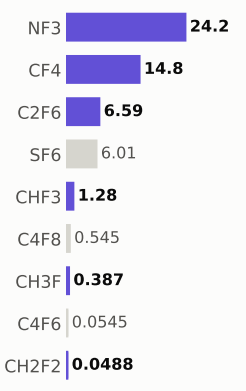

Step #21180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,348.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

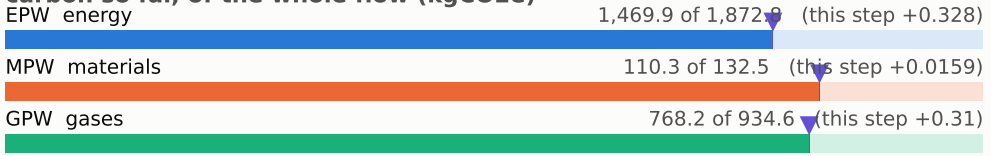

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

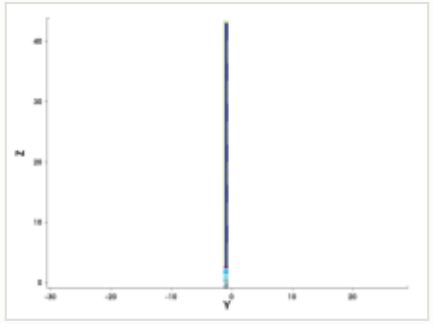

y cut at -1.035 µm

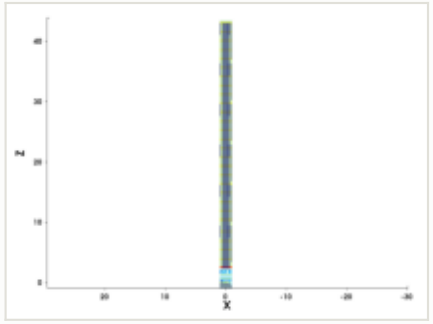

mask for this step

no mask for this step

steps by process area

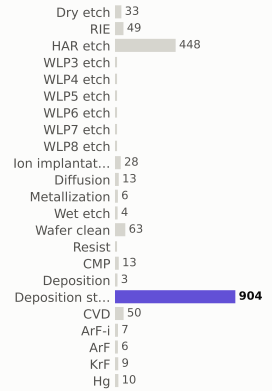

materials deposited (g)

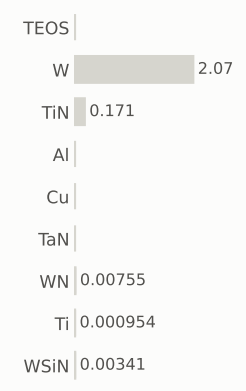

gases emitted (g)

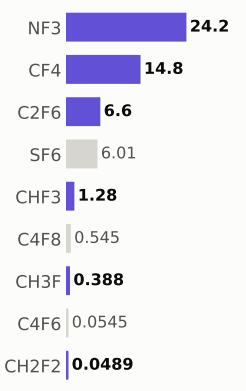

Step #21190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,349.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

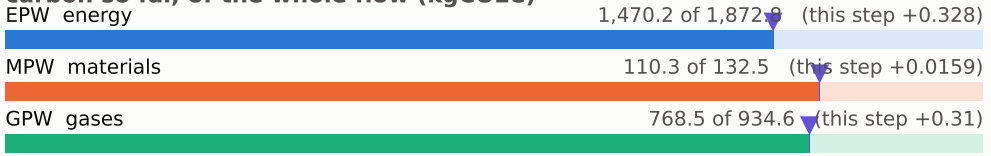

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

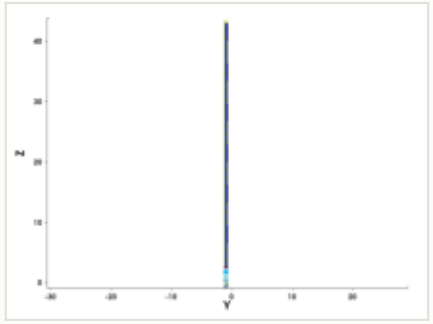

y cut at -1.035 µm

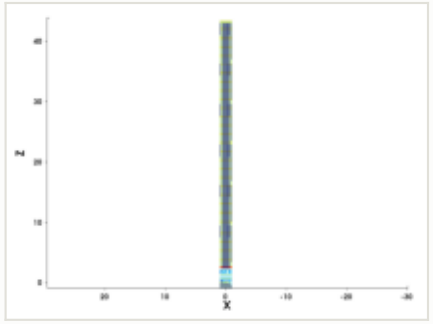

mask for this step

no mask for this step

steps by process area

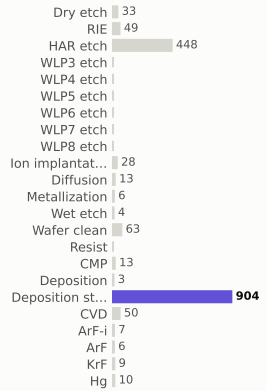

materials deposited (g)

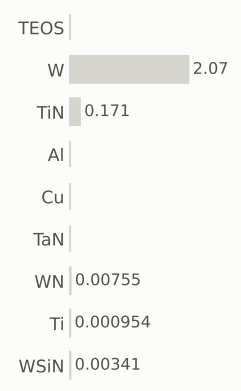

gases emitted (g)

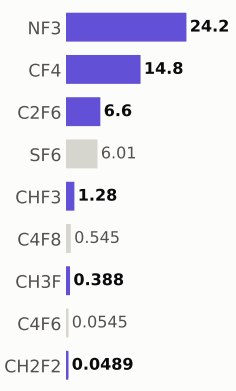

Step #21200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,349.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

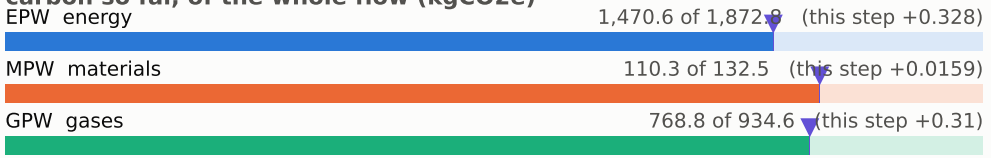

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

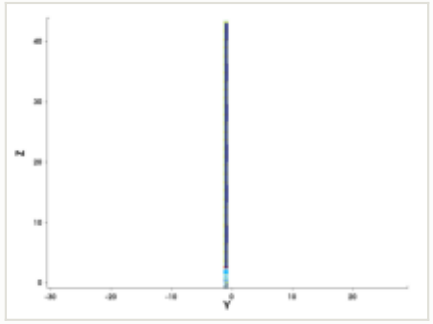

y cut at -1.035 µm

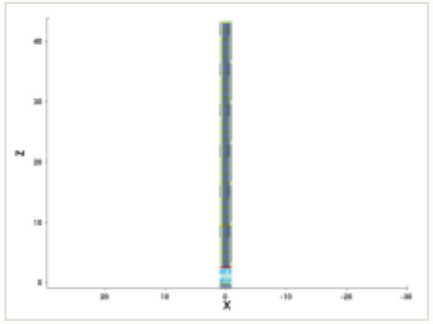

mask for this step

no mask for this step

steps by process area

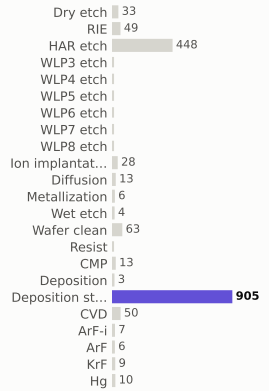

materials deposited (g)

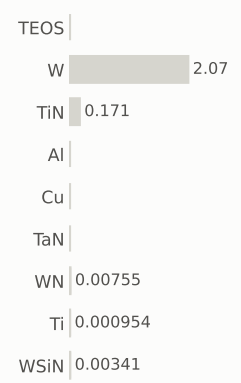

gases emitted (g)

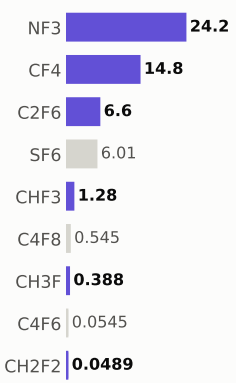

Step #21210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,350.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

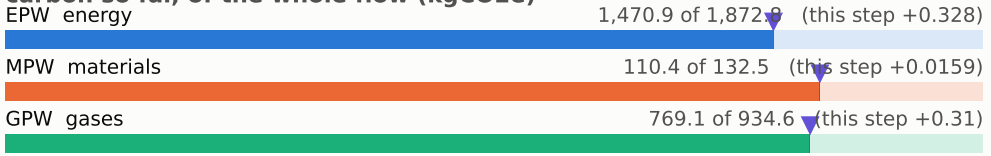

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

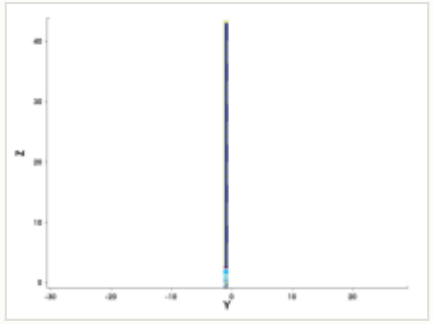

y cut at -1.035 µm

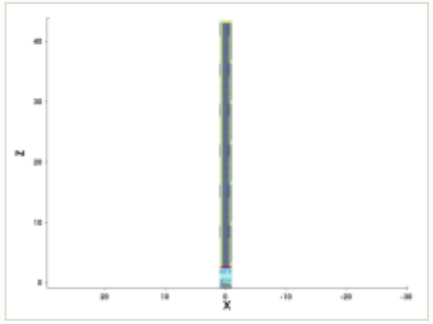

mask for this step

no mask for this step

steps by process area

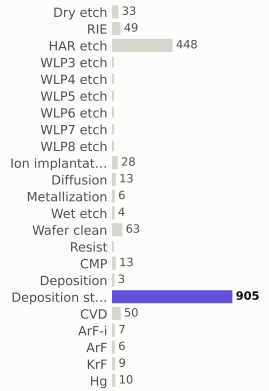

materials deposited (g)

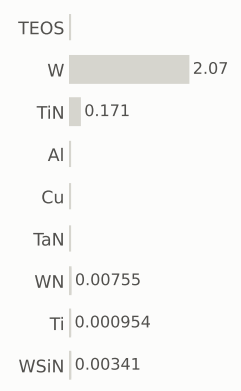

gases emitted (g)

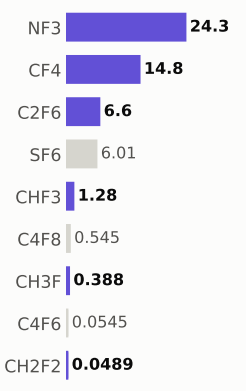

Step #21220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,351.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

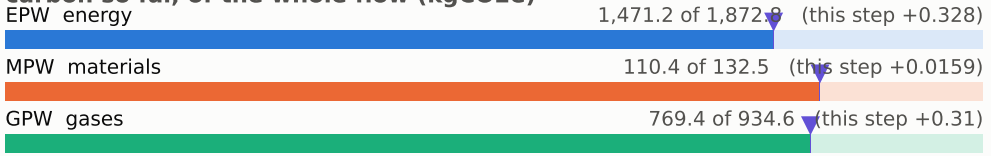

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

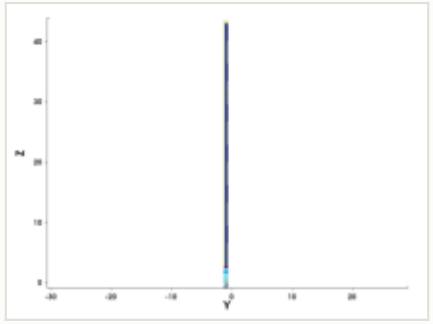

y cut at -1.035 µm

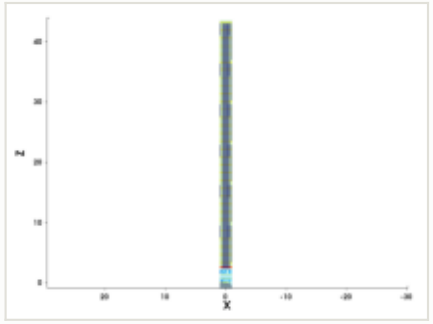

mask for this step

no mask for this step

steps by process area

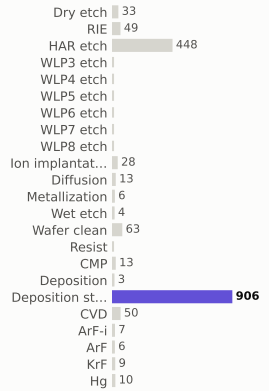

materials deposited (g)

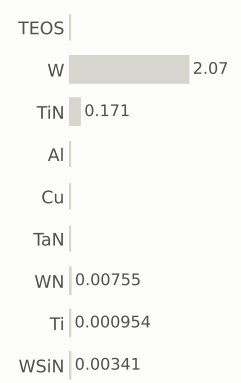

gases emitted (g)

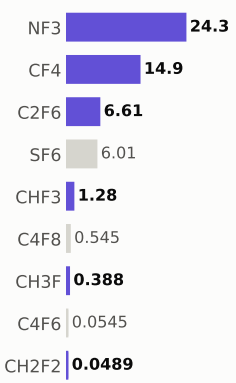

Step #21230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,351.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

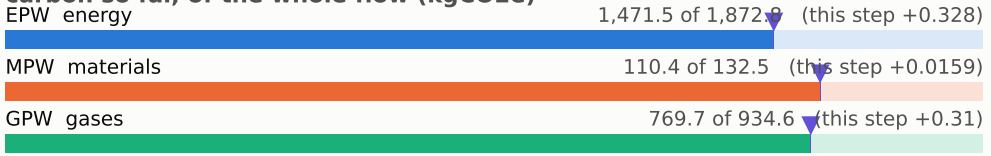

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

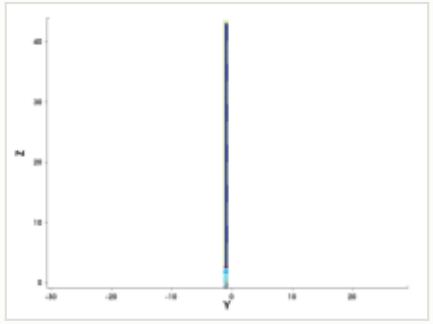

y cut at -1.035 µm

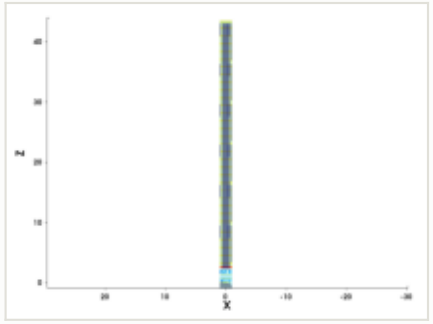

mask for this step

no mask for this step

steps by process area

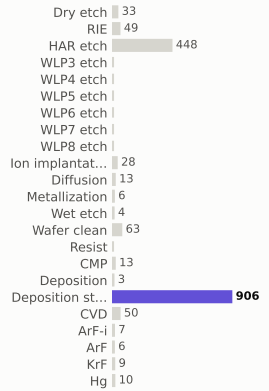

materials deposited (g)

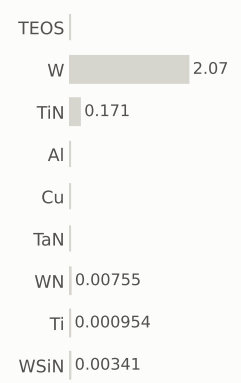

gases emitted (g)

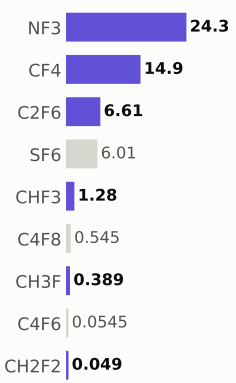

Step #21240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,352.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

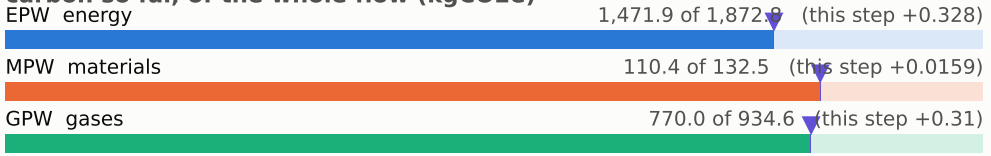

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

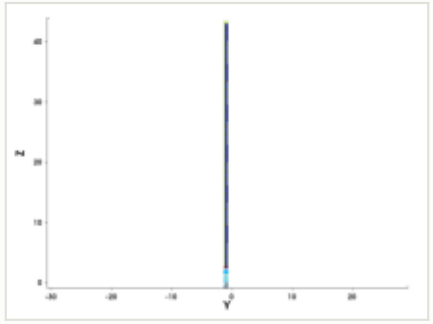

y cut at -1.035 µm

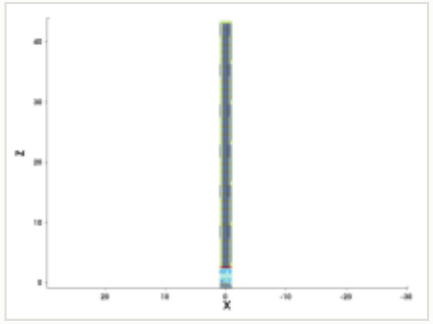

mask for this step

no mask for this step

steps by process area

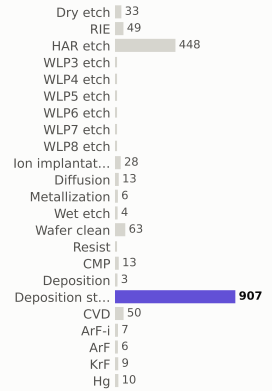

materials deposited (g)

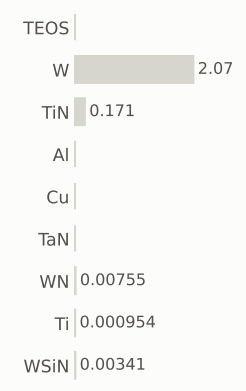

gases emitted (g)

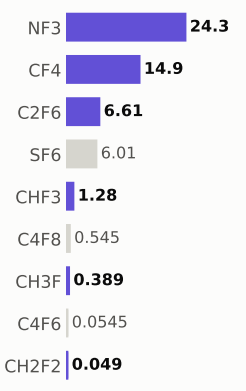

Step #21250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,353.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

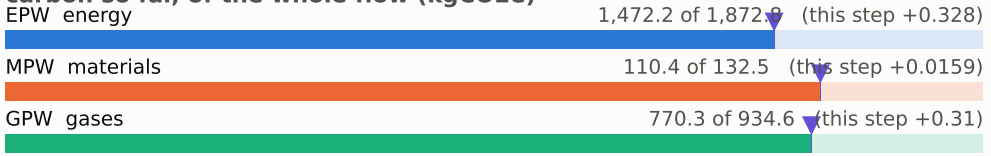

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

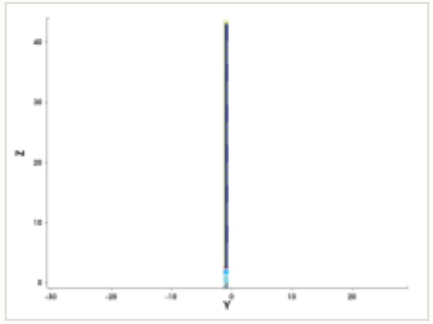

y cut at -1.035 µm

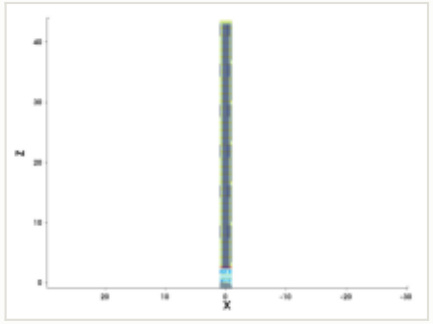

mask for this step

no mask for this step

steps by process area

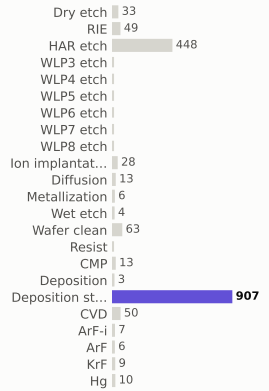

materials deposited (g)

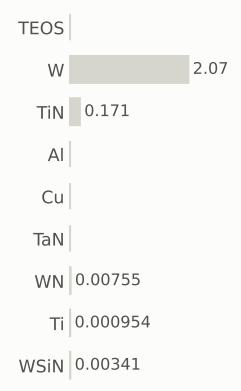

gases emitted (g)

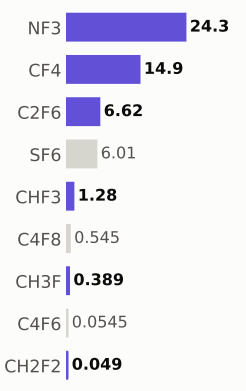

Step #21260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,353.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

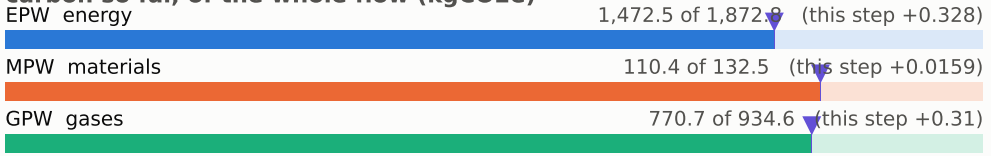

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

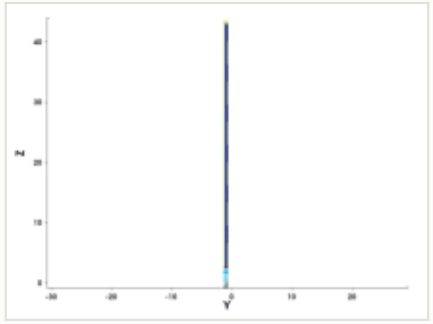

y cut at -1.035 µm

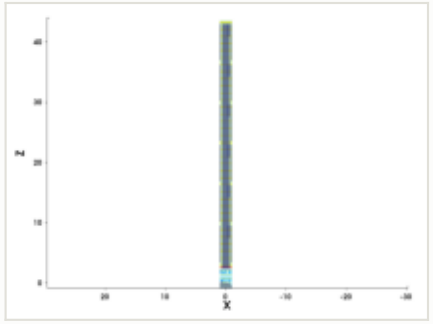

mask for this step

no mask for this step

steps by process area

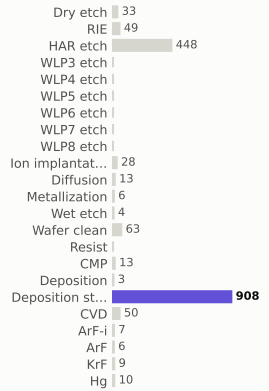

materials deposited (g)

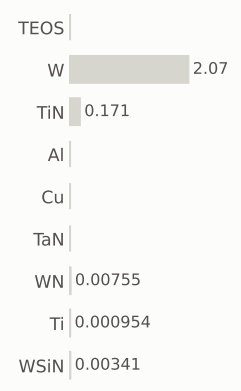

gases emitted (g)



Step #21270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,354.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

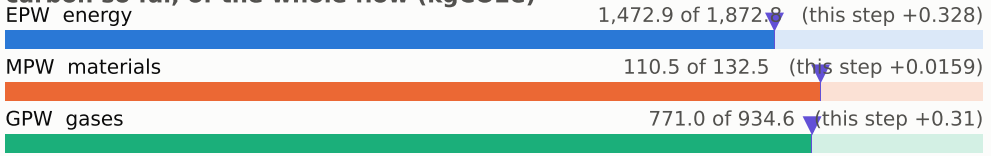

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

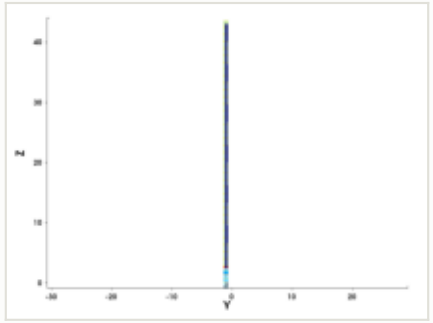

y cut at -1.035 µm

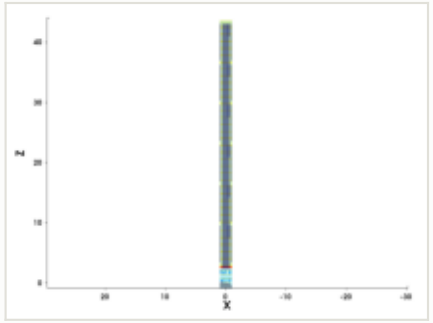

mask for this step

no mask for this step

steps by process area

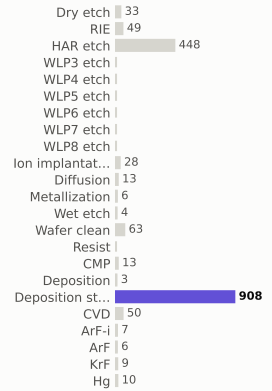

materials deposited (g)

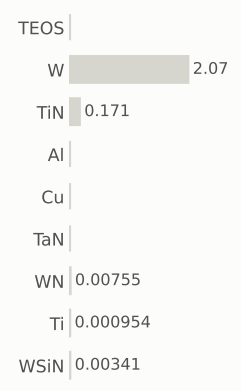

gases emitted (g)

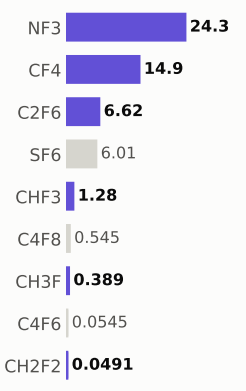

Step #21280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,354.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

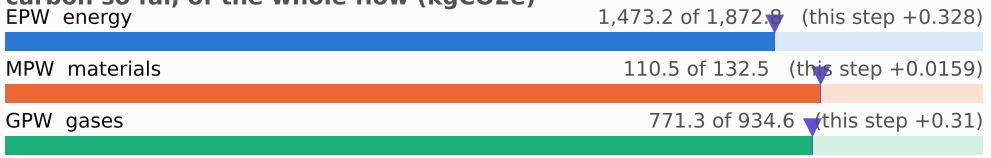

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

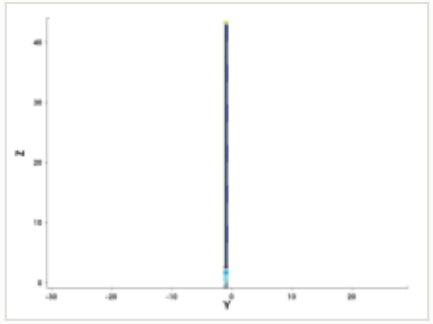

y cut at -1.035 µm

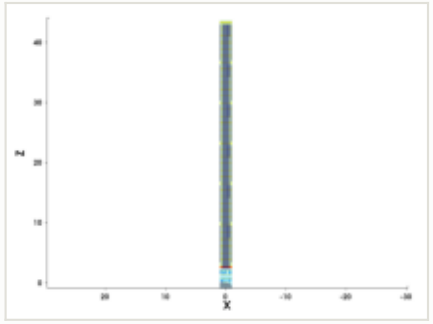

mask for this step

no mask for this step

steps by process area

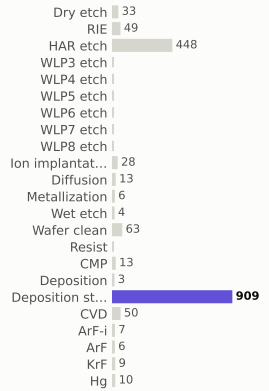

materials deposited (g)

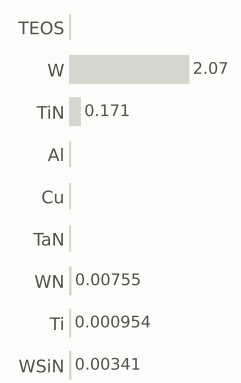

gases emitted (g)

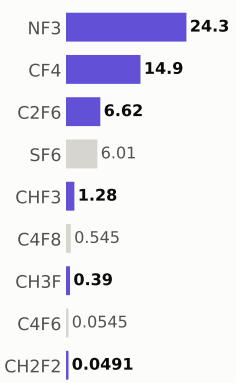

Step #21290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,355.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

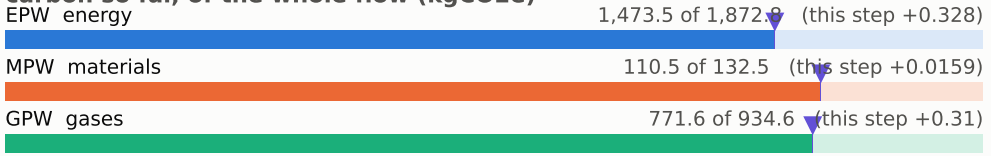

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

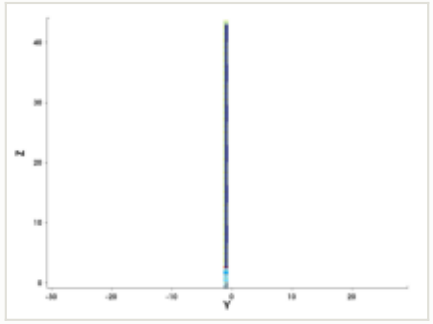

y cut at -1.035 µm

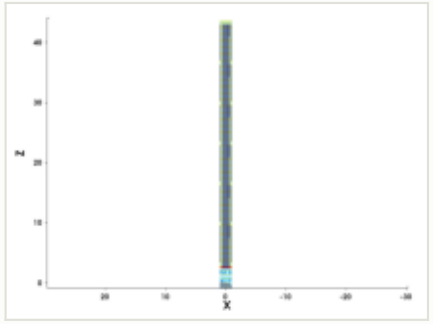

mask for this step

no mask for this step

steps by process area

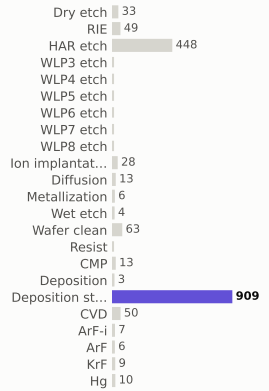

materials deposited (g)

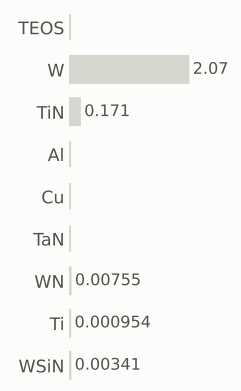

gases emitted (g)

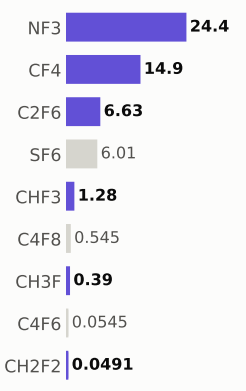

Step #21300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,356.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

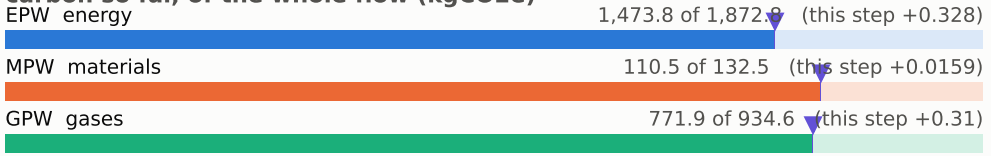

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

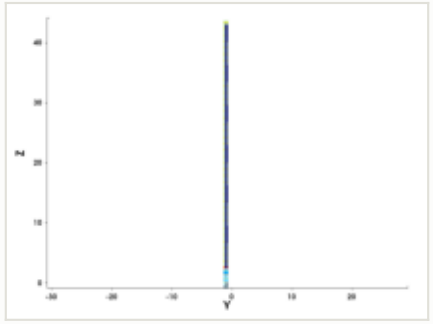

y cut at -1.035 µm

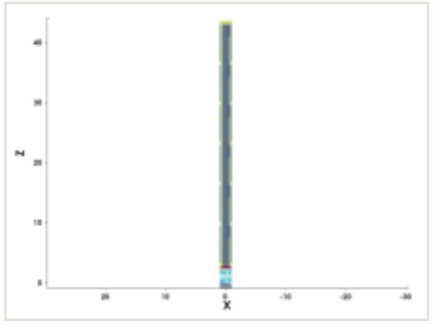

mask for this step

no mask for this step

steps by process area

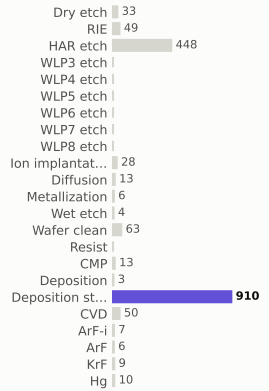

materials deposited (g)

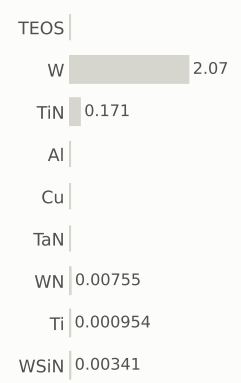

gases emitted (g)

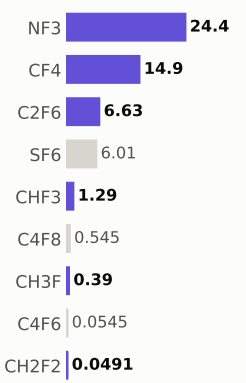

Step #21310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,356.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

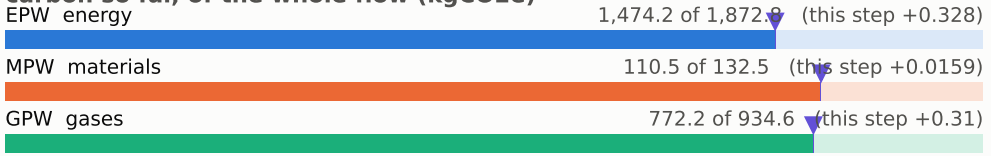

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

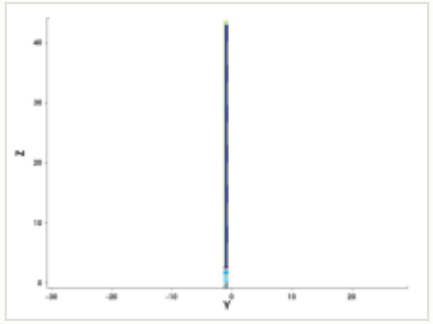

y cut at -1.035 µm

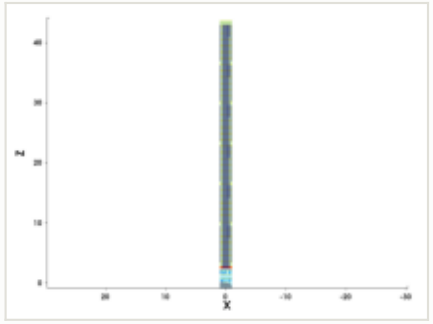

mask for this step

no mask for this step

steps by process area

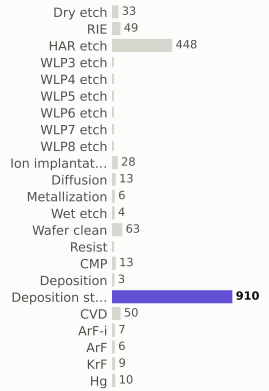

materials deposited (g)

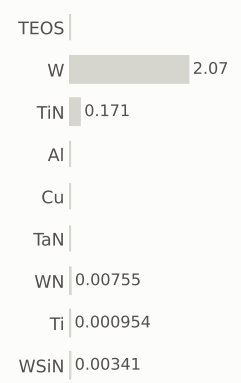

gases emitted (g)

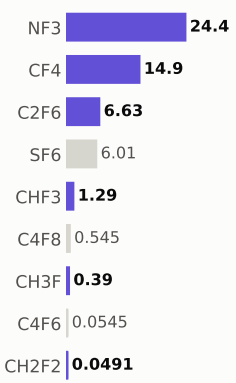

Step #21320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,357.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

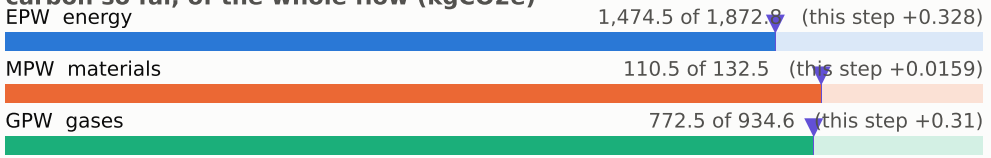

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

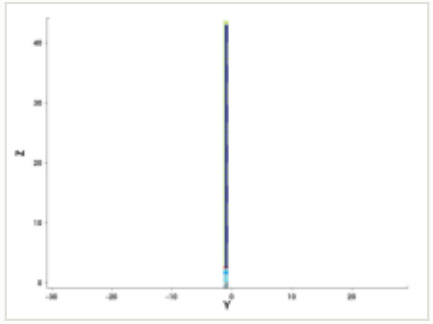

y cut at -1.035 µm

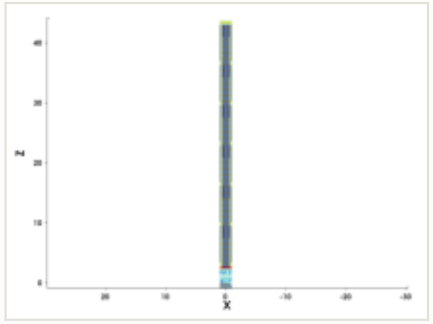

mask for this step

no mask for this step

steps by process area

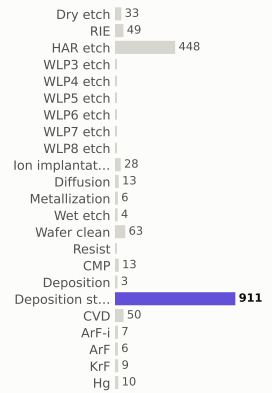

materials deposited (g)

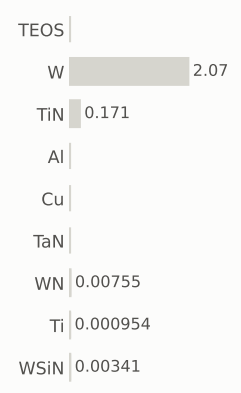

gases emitted (g)

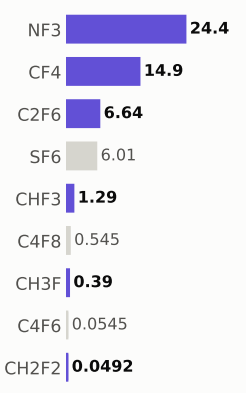

Step #21330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,358.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

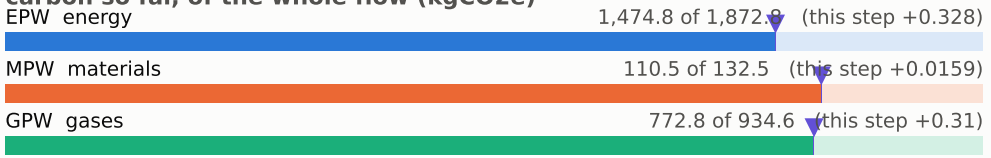

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

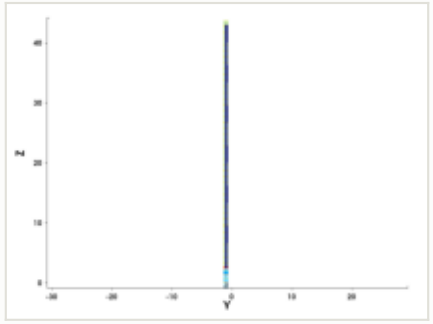

y cut at -1.035 µm

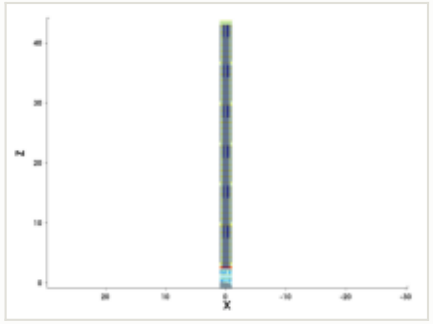

mask for this step

no mask for this step

steps by process area

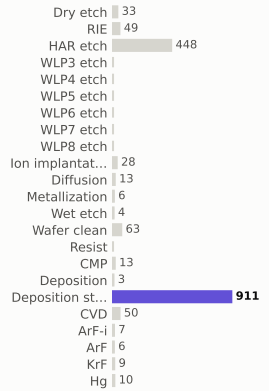

materials deposited (g)

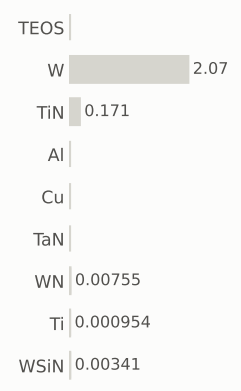

gases emitted (g)

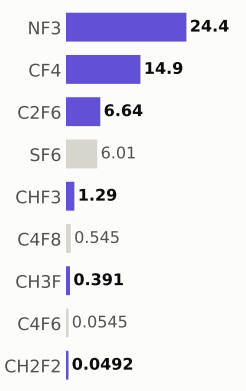

Step #21340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,358.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

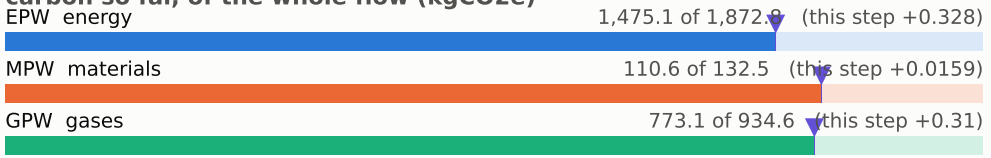

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

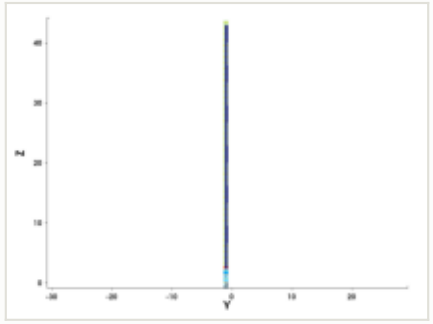

y cut at -1.035 µm

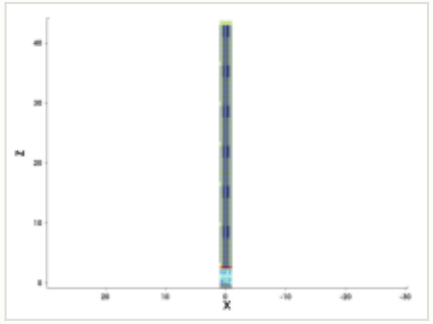

mask for this step

no mask for this step

steps by process area

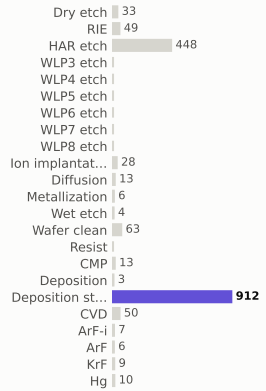

materials deposited (g)

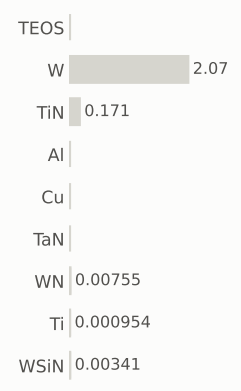

gases emitted (g)

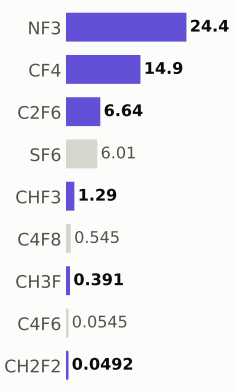

Step #21350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,359.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

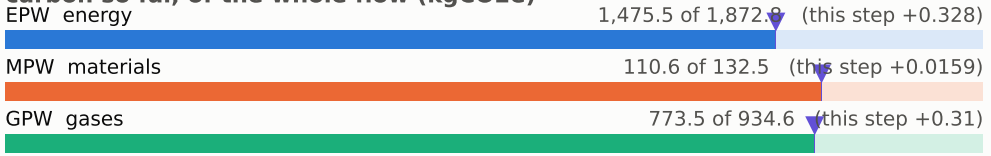

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

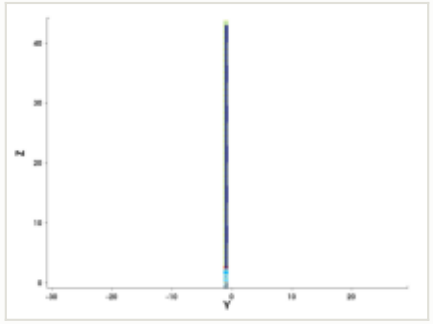

y cut at -1.035 µm

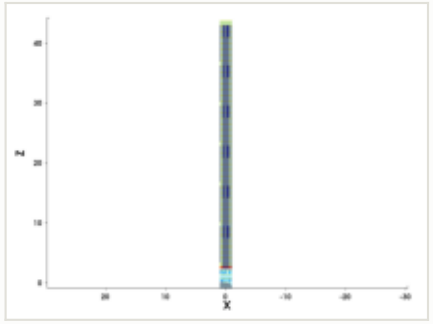

mask for this step

no mask for this step

steps by process area

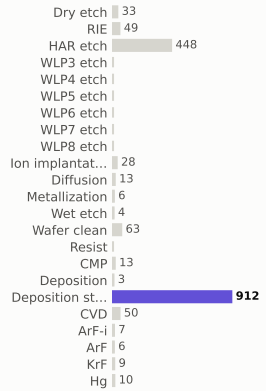

materials deposited (g)

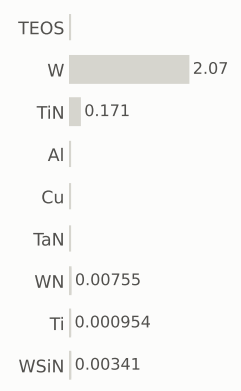

gases emitted (g)

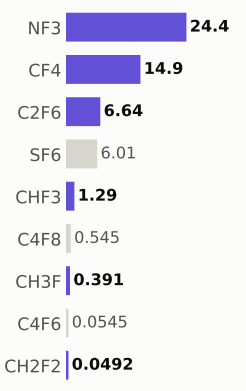

Step #21360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,360.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

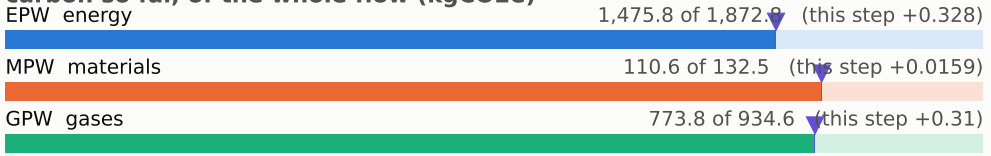

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

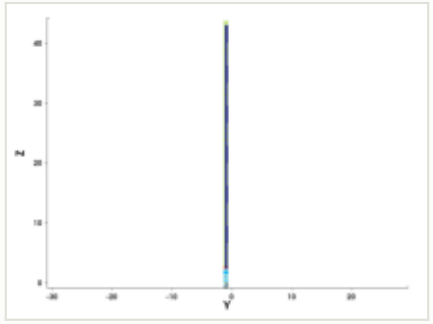

y cut at -1.035 µm

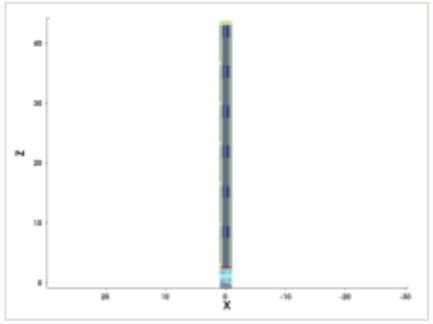

mask for this step

no mask for this step

steps by process area

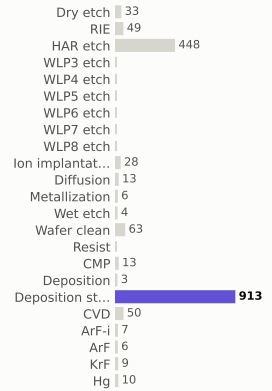

materials deposited (g)

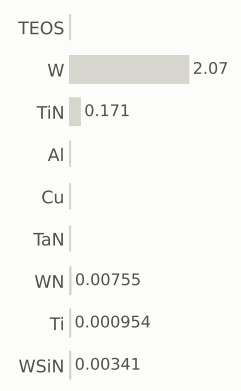

gases emitted (g)

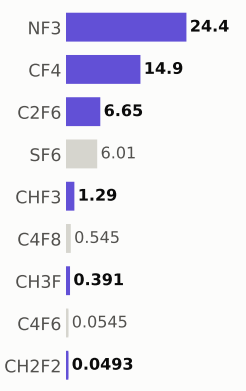

Step #21370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,360.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

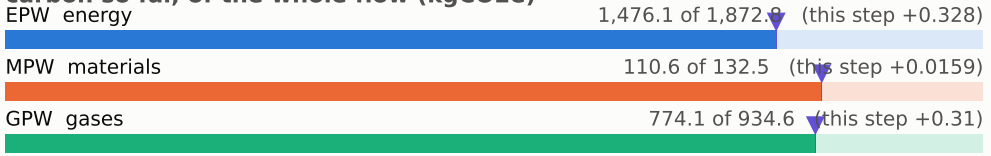

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

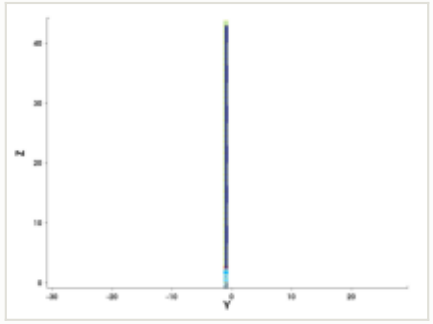

y cut at -1.035 µm

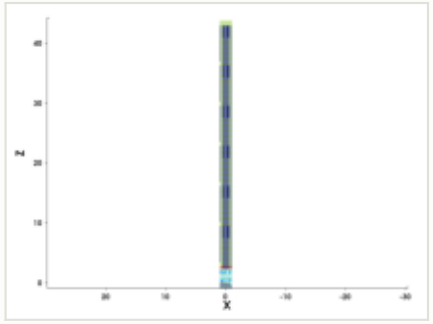

mask for this step

no mask for this step

steps by process area

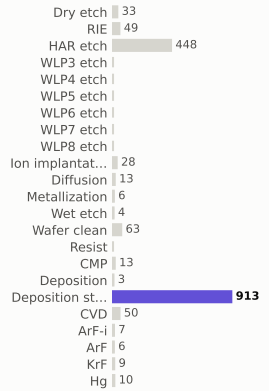

materials deposited (g)

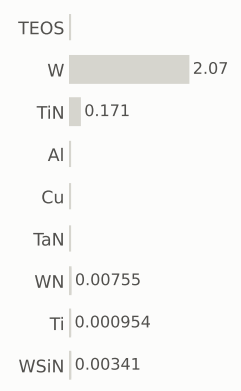

gases emitted (g)

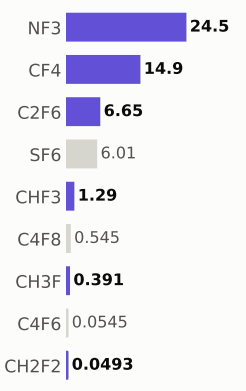

Step #21380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,361.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

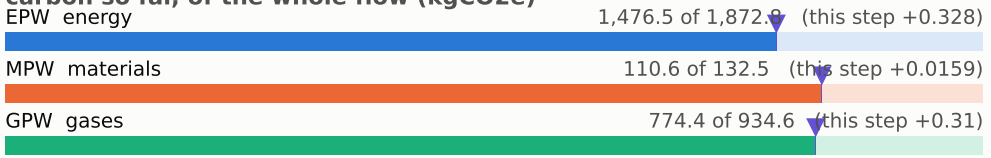

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

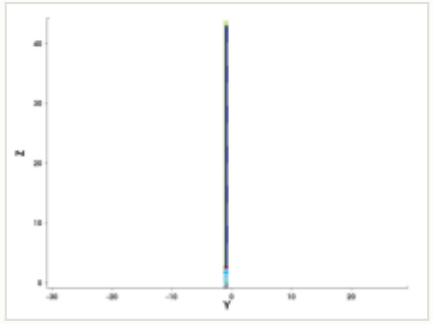

y cut at -1.035 µm

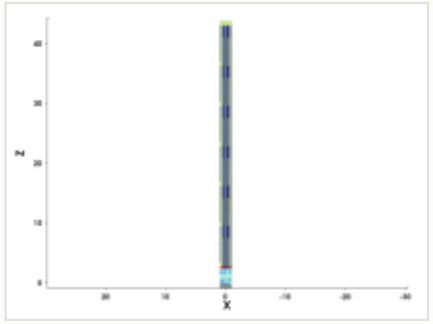

mask for this step

no mask for this step

steps by process area

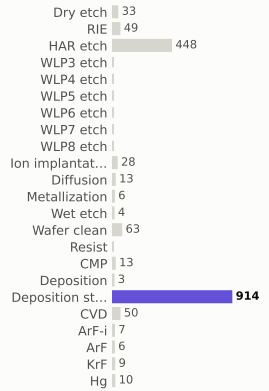

materials deposited (g)

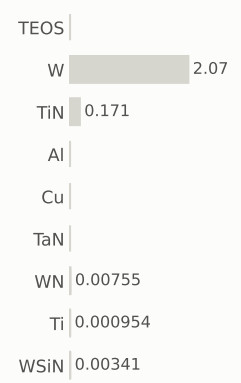

gases emitted (g)

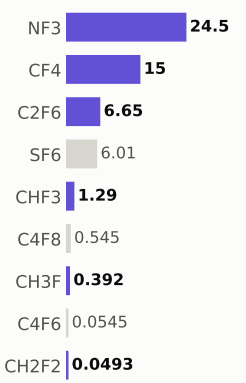

Step #21390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,362.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

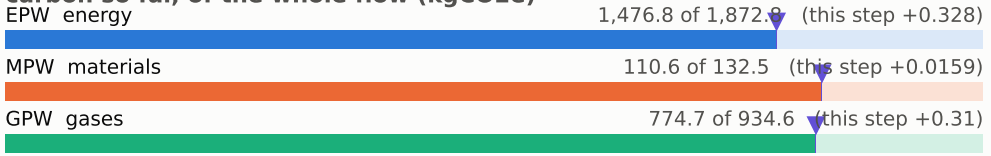

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

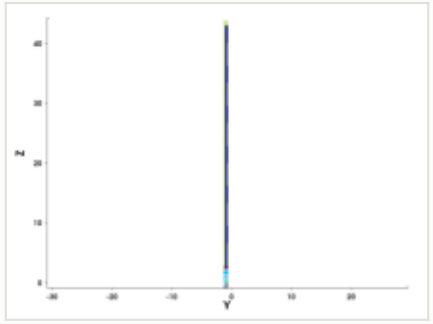

y cut at -1.035 µm

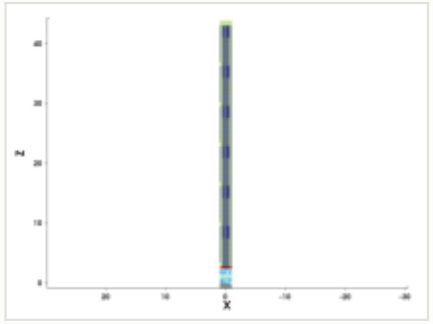

mask for this step

no mask for this step

steps by process area

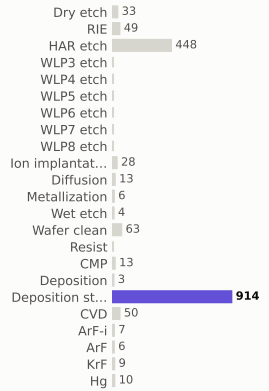

materials deposited (g)

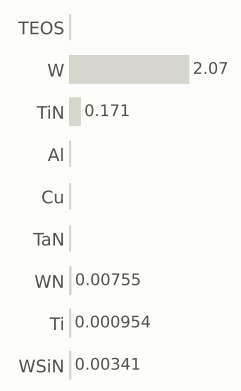

gases emitted (g)

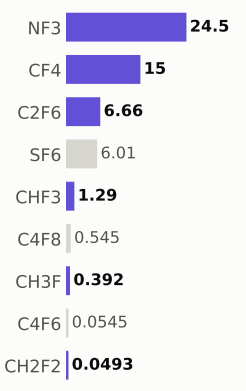

Step #21400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,362.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

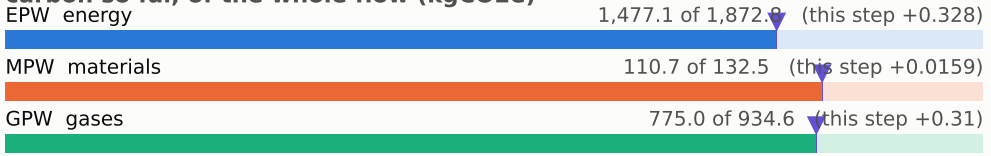

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

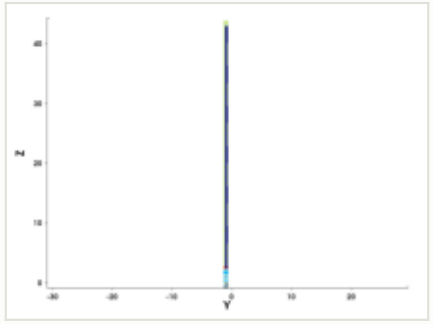

y cut at -1.035 µm

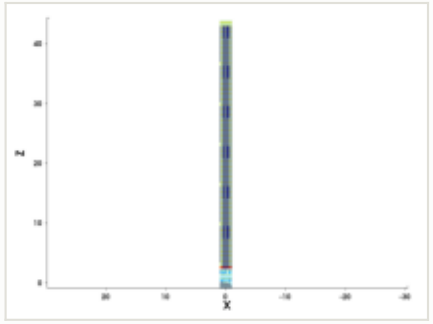

mask for this step

no mask for this step

steps by process area

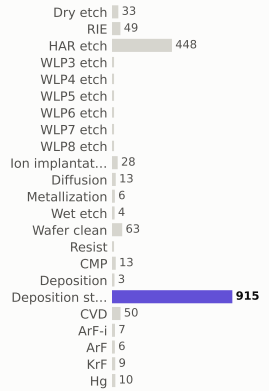

materials deposited (g)

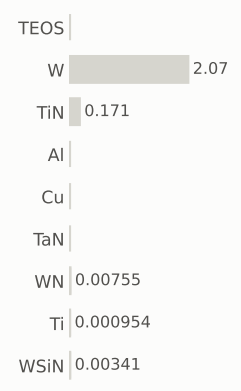

gases emitted (g)

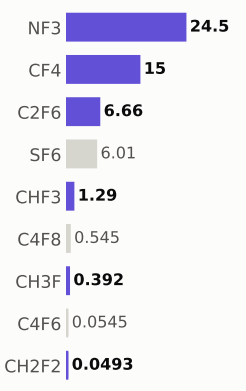

Step #21410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,363.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

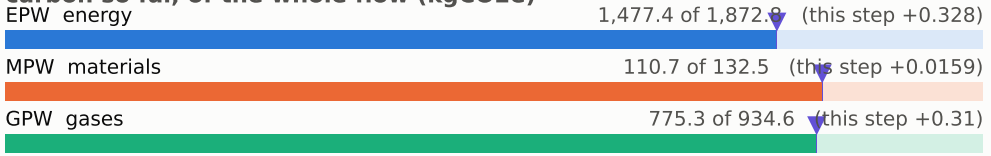

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

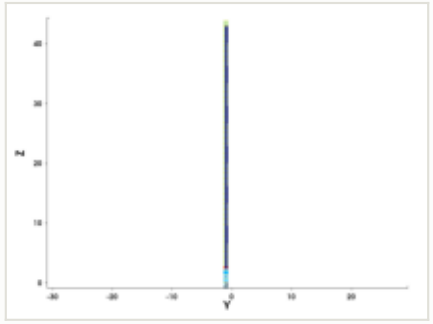

y cut at -1.035 µm

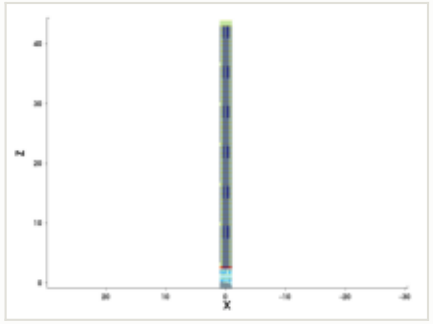

mask for this step

no mask for this step

steps by process area

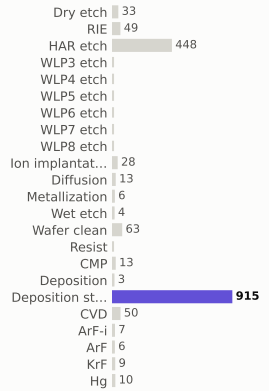

materials deposited (g)

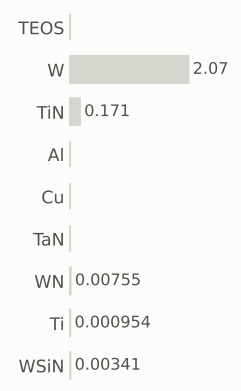

gases emitted (g)

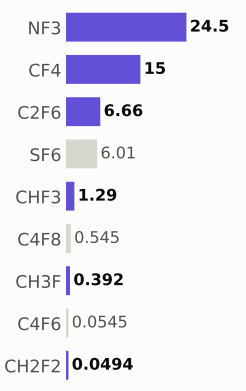

Step #21420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,364.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

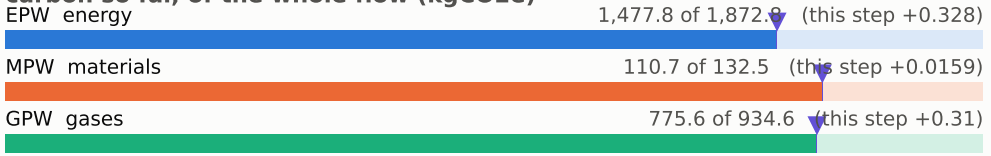

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

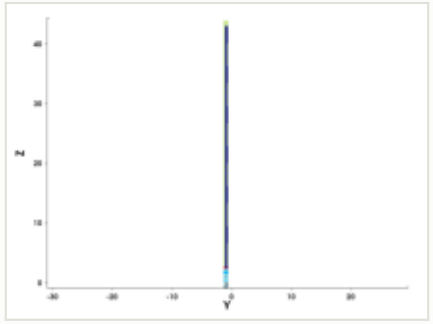

y cut at -1.035 µm

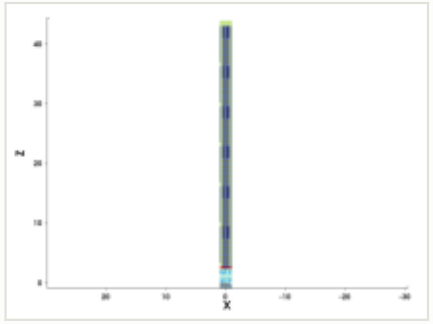

mask for this step

no mask for this step

steps by process area

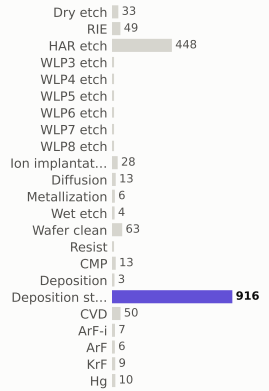

materials deposited (g)

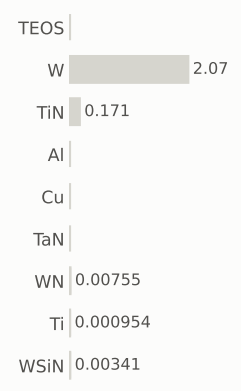

gases emitted (g)

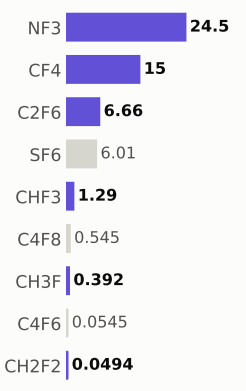

Step #21430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,364.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

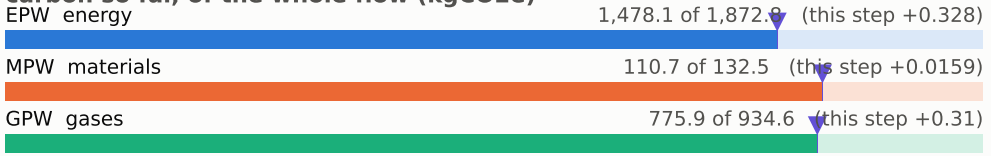

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

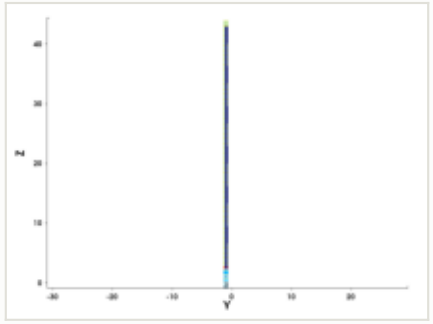

y cut at -1.035 µm

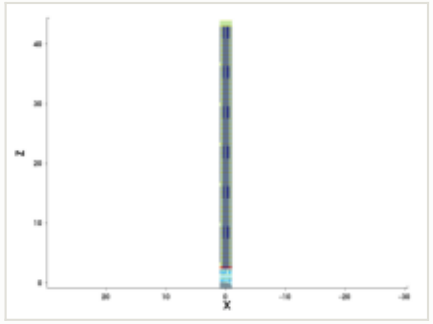

mask for this step

no mask for this step

steps by process area

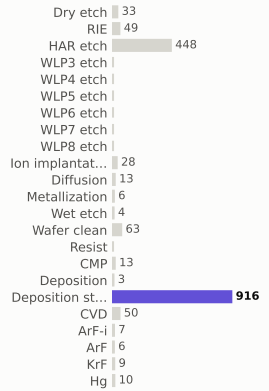

materials deposited (g)

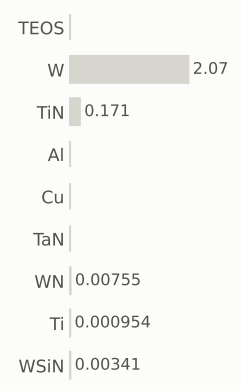

gases emitted (g)

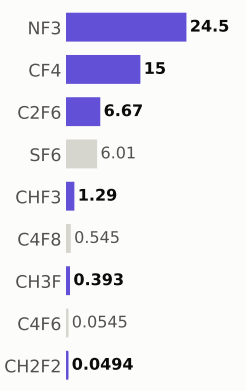

Step #21440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,365.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

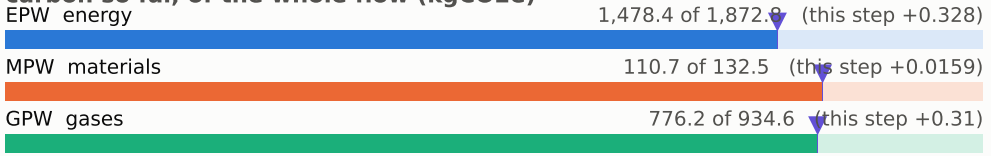

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

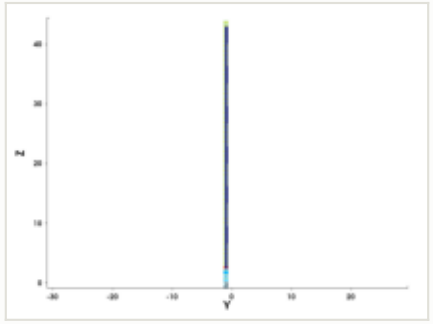

y cut at -1.035 µm

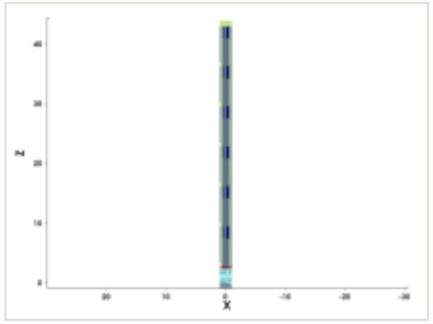

mask for this step

no mask for this step

steps by process area

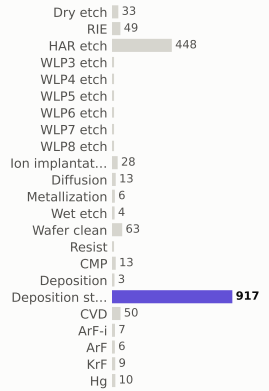

materials deposited (g)

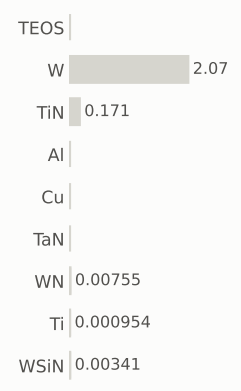

gases emitted (g)

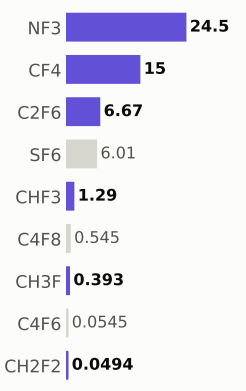

Step #21450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,366.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

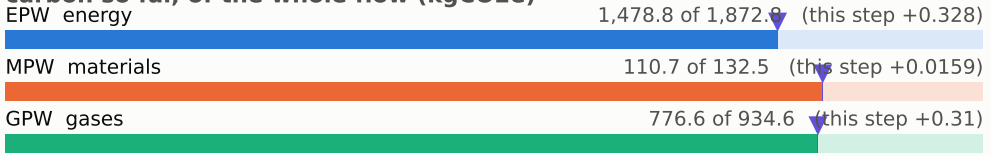

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

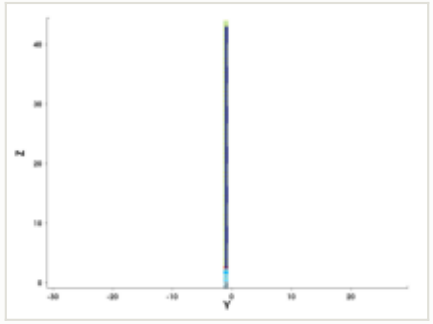

y cut at -1.035 µm

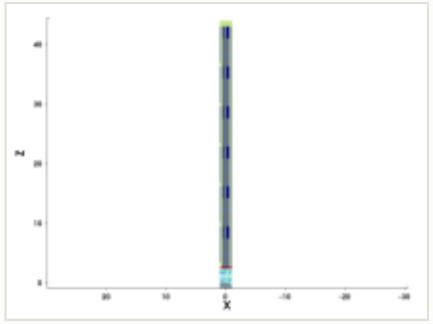

mask for this step

no mask for this step

steps by process area

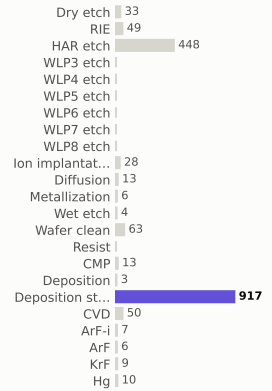

materials deposited (g)

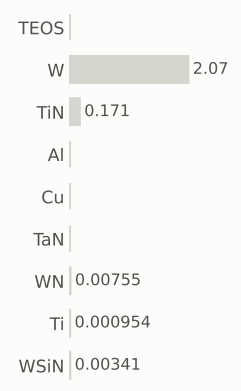

gases emitted (g)

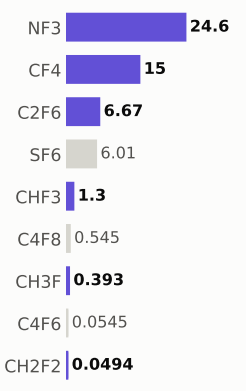

Step #21460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,366.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

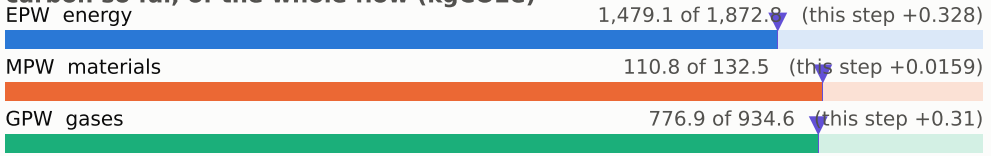

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

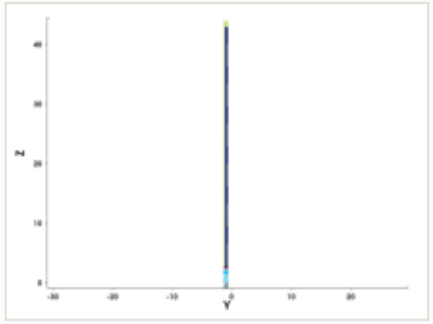

y cut at -1.035 µm

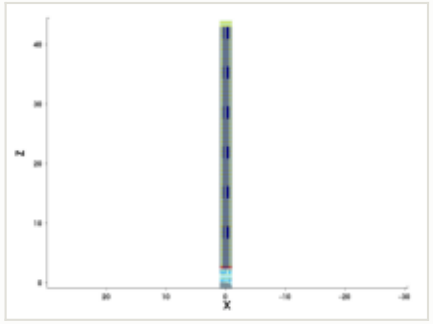

mask for this step

no mask for this step

steps by process area

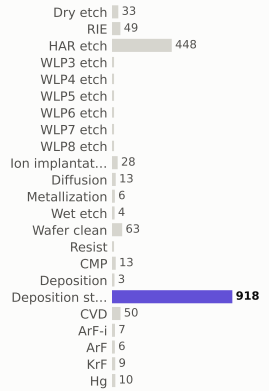

materials deposited (g)

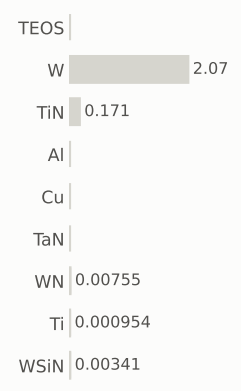

gases emitted (g)

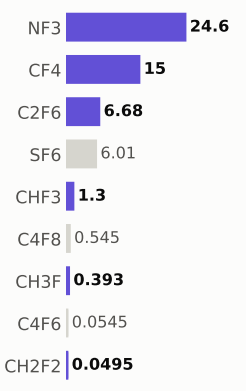

Step #21470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,367.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

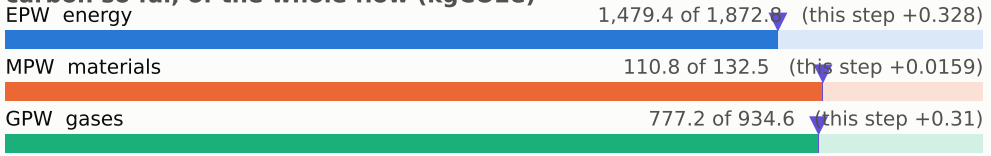

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

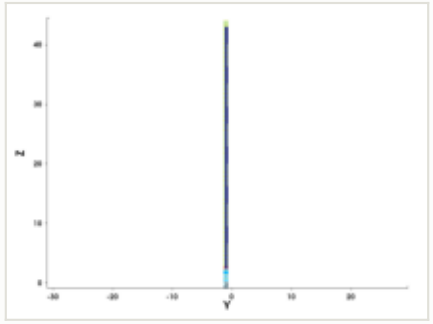

y cut at -1.035 µm

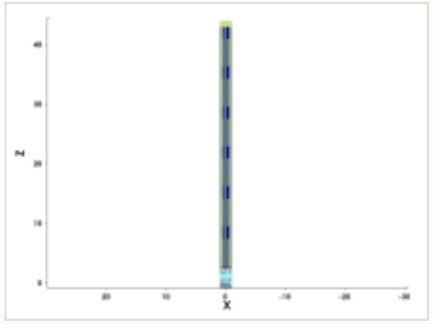

mask for this step

no mask for this step

steps by process area

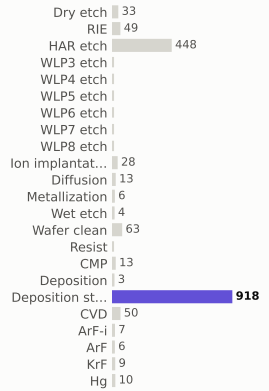

materials deposited (g)

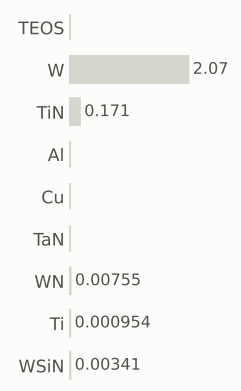

gases emitted (g)

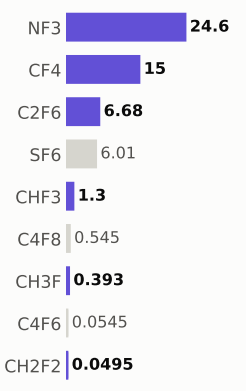

Step #21480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,368.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

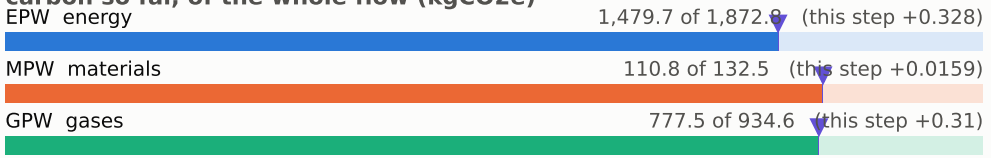

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

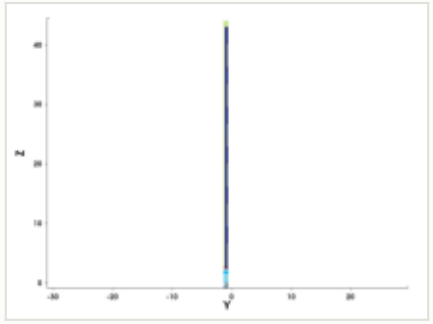

y cut at -1.035 µm

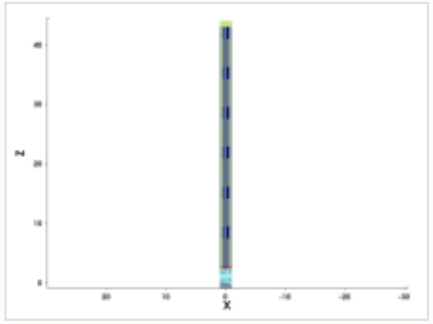

mask for this step

no mask for this step

steps by process area

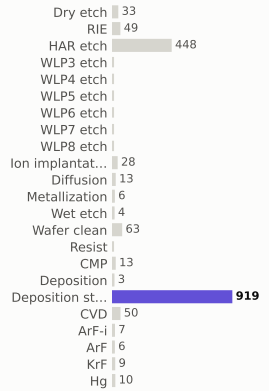

materials deposited (g)

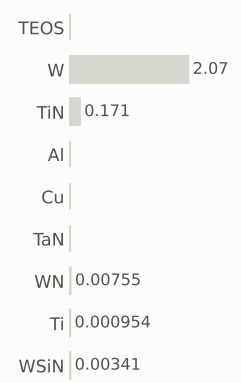

gases emitted (g)

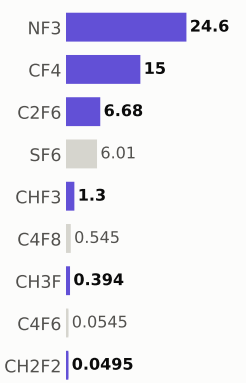

Step #21490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,368.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

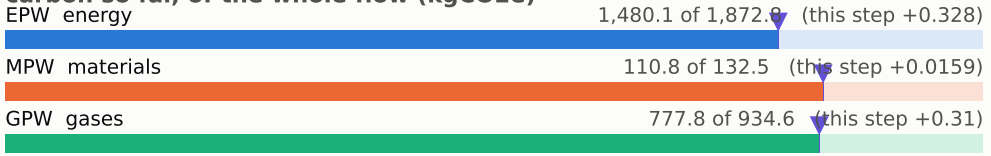

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

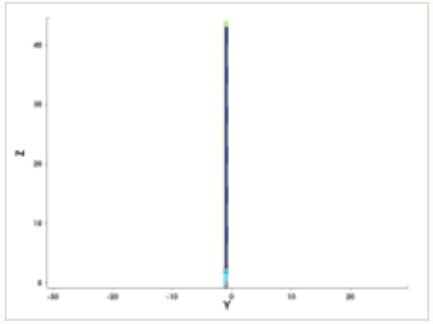

y cut at -1.035 µm

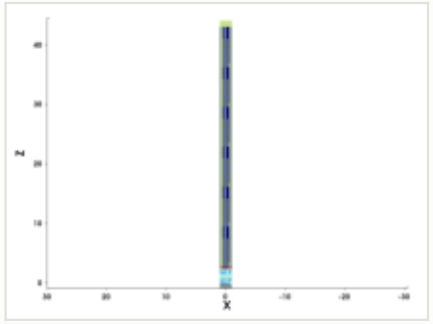

mask for this step

no mask for this step

steps by process area

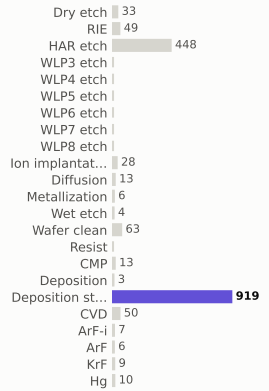

materials deposited (g)

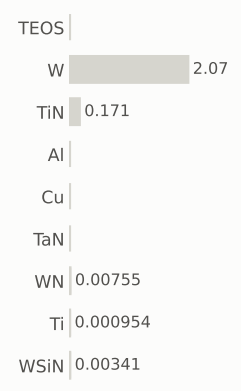

gases emitted (g)

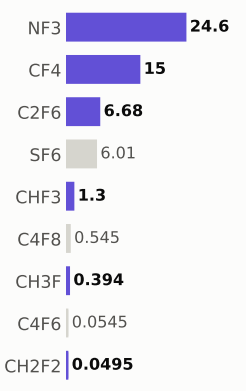

Step #21500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,369.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

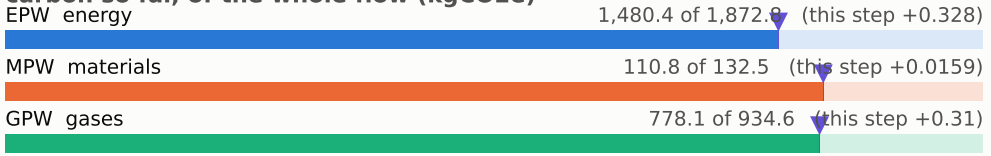

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

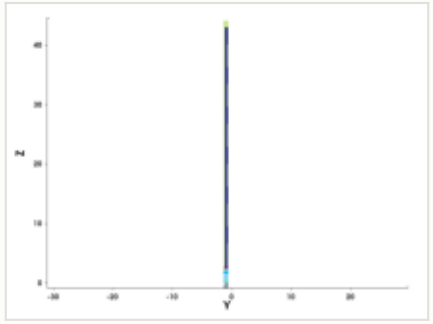

y cut at -1.035 µm

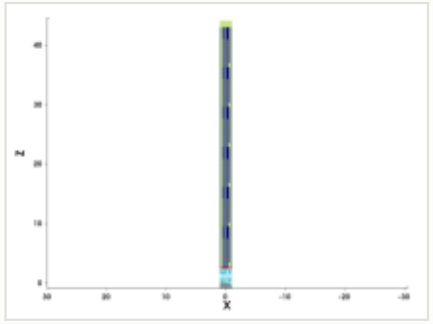

mask for this step

no mask for this step

steps by process area

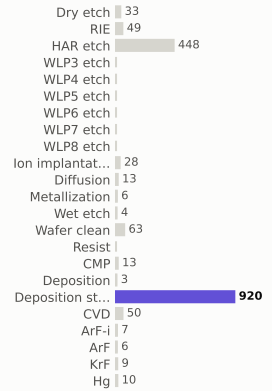

materials deposited (g)

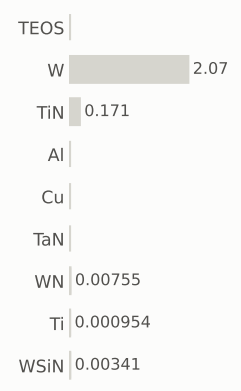

gases emitted (g)

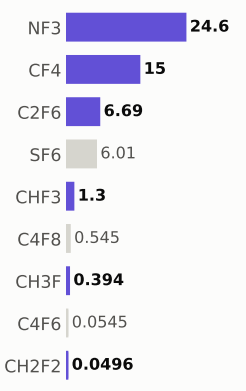

Step #21510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,370.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

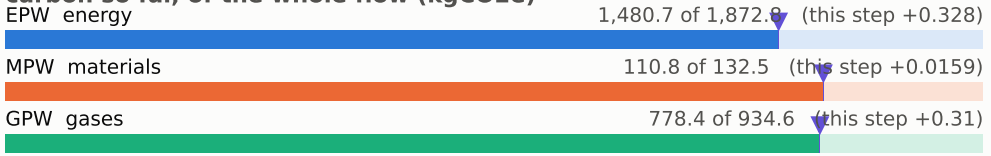

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

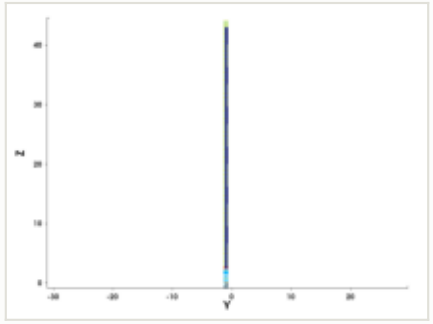

y cut at -1.035 µm

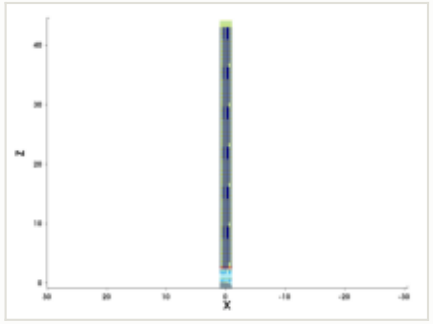

mask for this step

no mask for this step

steps by process area

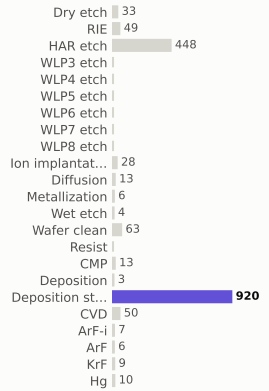

materials deposited (g)

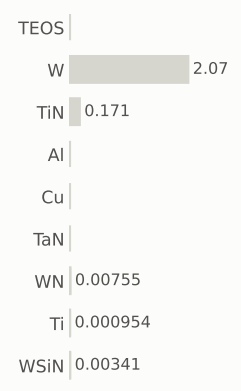

gases emitted (g)

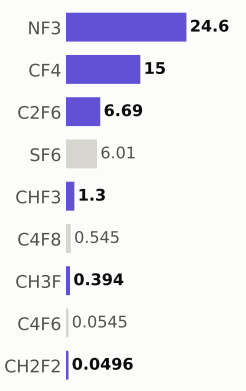

Step #21520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,370.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

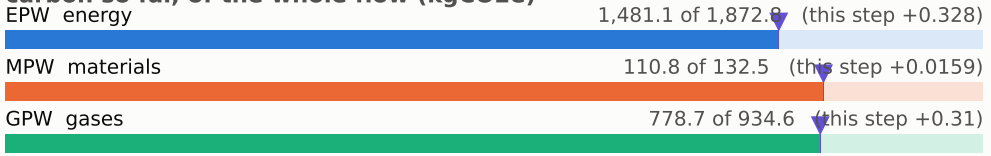

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

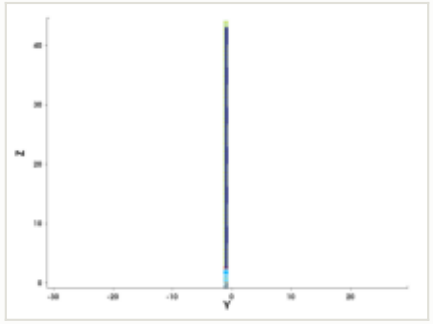

y cut at -1.035 µm

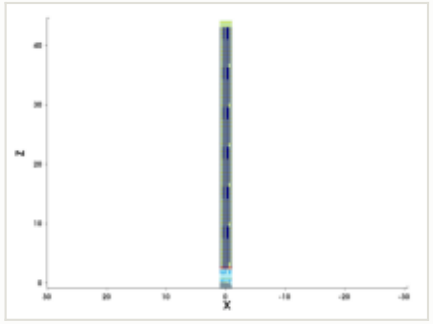

mask for this step

no mask for this step

steps by process area

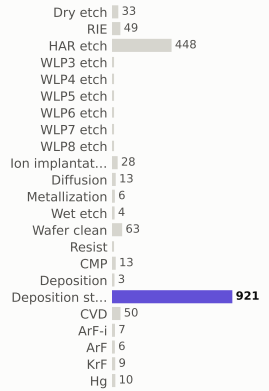

materials deposited (g)

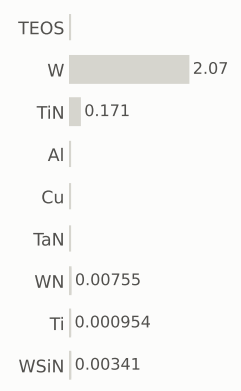

gases emitted (g)

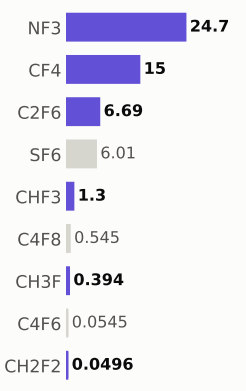

Step #21530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,371.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

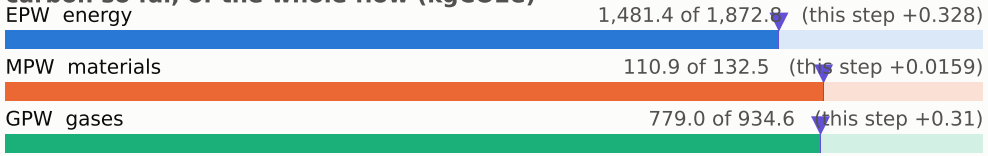

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

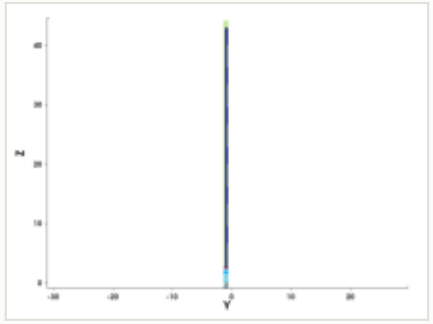

y cut at -1.035 µm

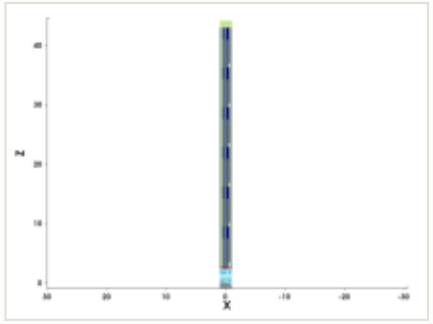

mask for this step

no mask for this step

steps by process area

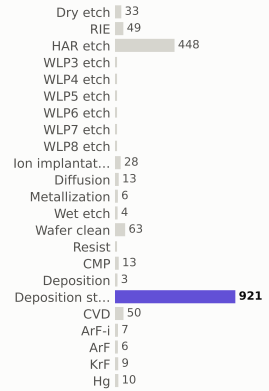

materials deposited (g)

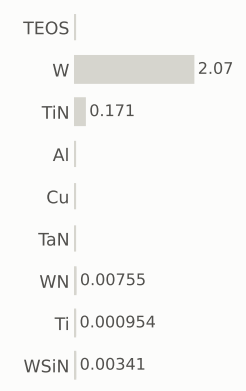

gases emitted (g)

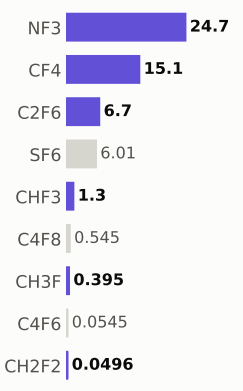

Step #21540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,371.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

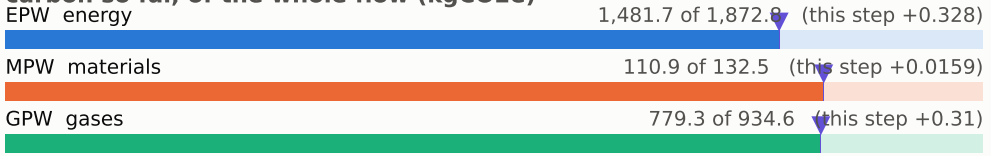

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

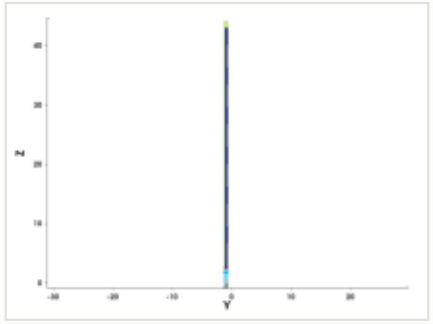

y cut at -1.035 µm

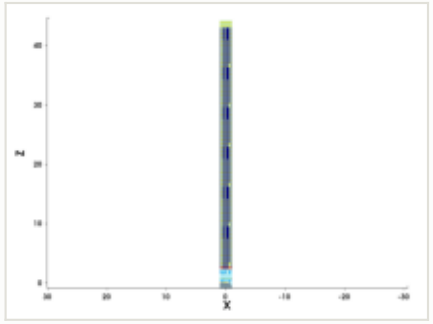

mask for this step

no mask for this step

steps by process area

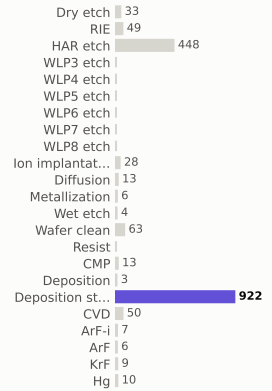

materials deposited (g)

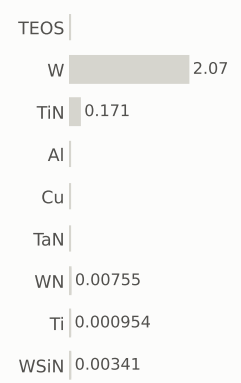

gases emitted (g)

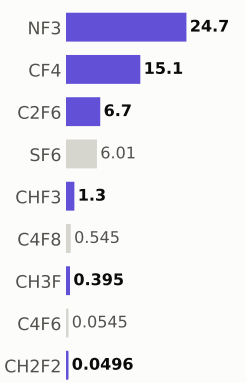

Step #21550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,372.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

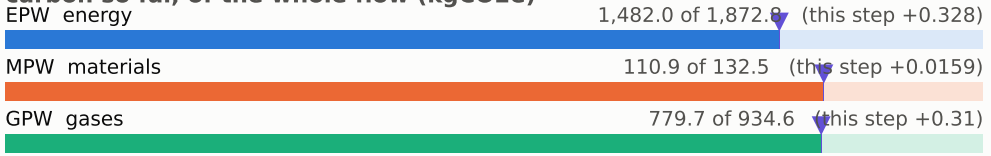

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

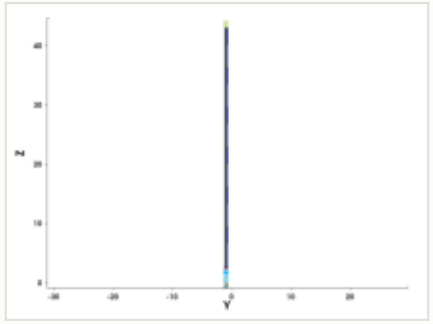

y cut at -1.035 µm

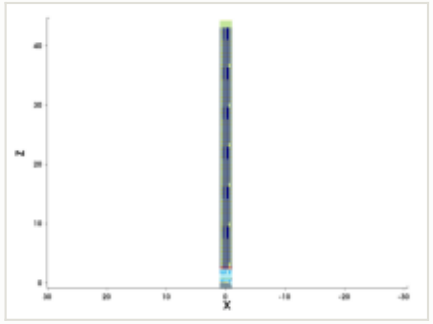

mask for this step

no mask for this step

steps by process area

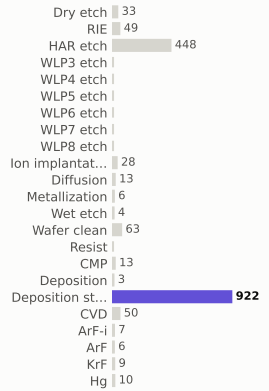

materials deposited (g)

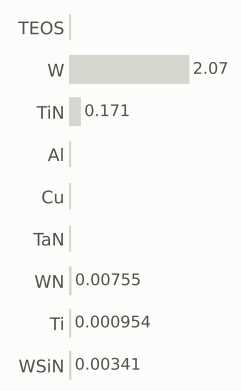

gases emitted (g)

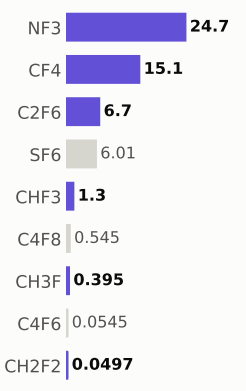

Step #21560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,373.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

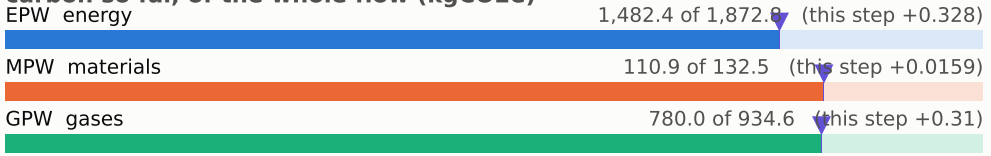

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

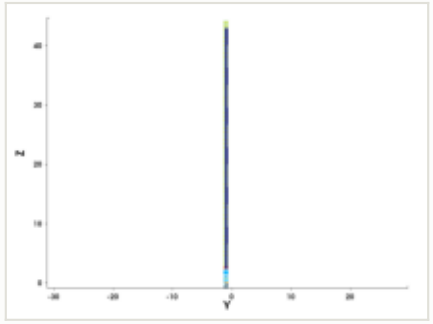

y cut at -1.035 µm

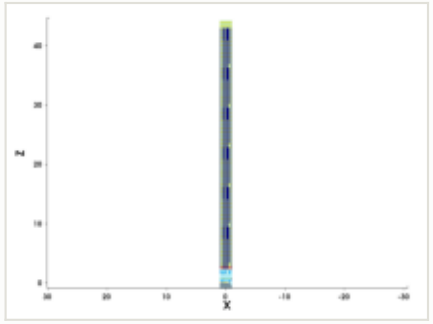

mask for this step

no mask for this step

steps by process area

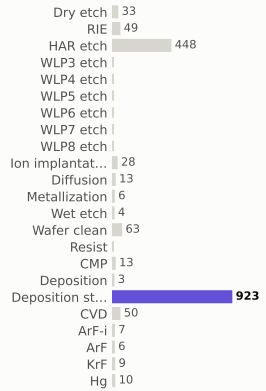

materials deposited (g)

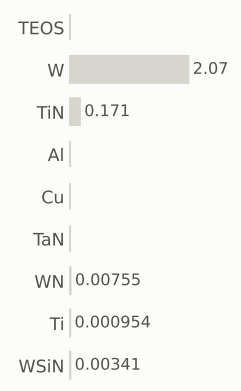

gases emitted (g)

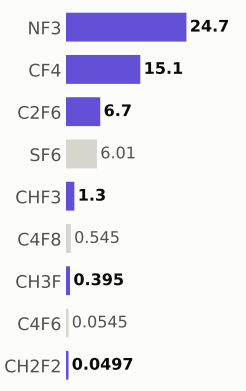

Step #21570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,373.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

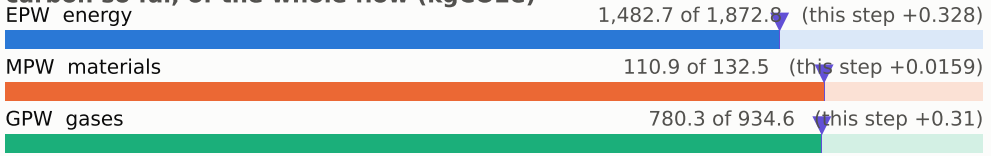

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

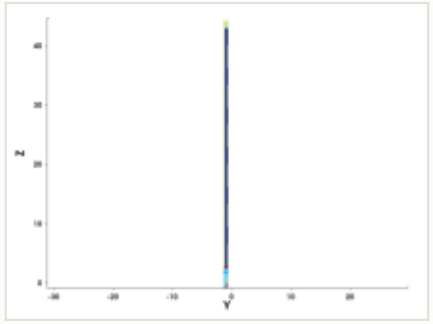

y cut at -1.035 µm

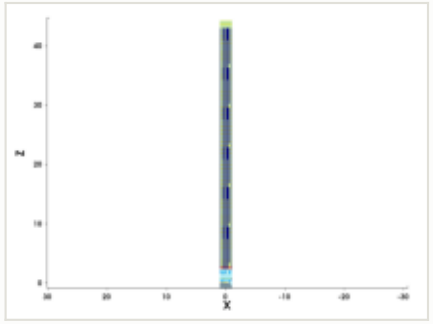

mask for this step

no mask for this step

steps by process area

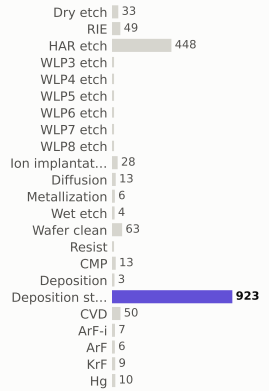

materials deposited (g)

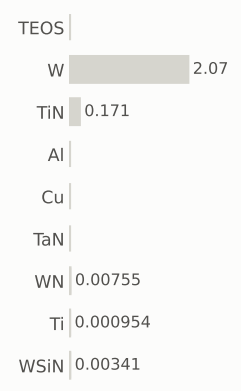

gases emitted (g)

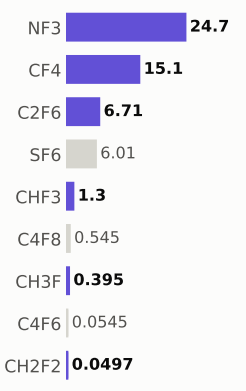

Step #21580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,374.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

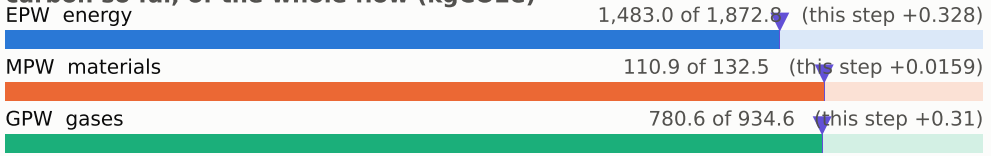

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

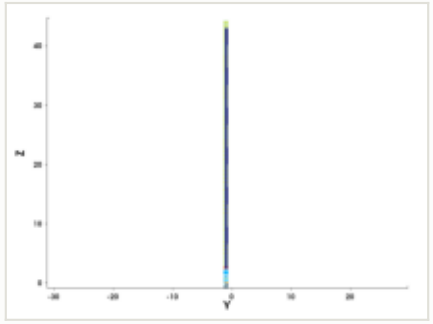

y cut at -1.035 µm

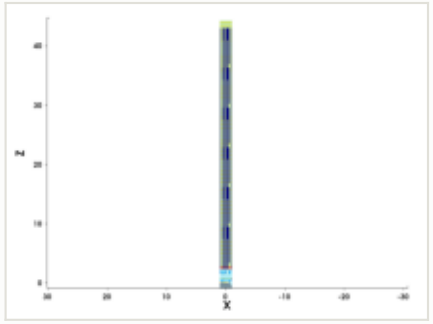

mask for this step

no mask for this step

steps by process area

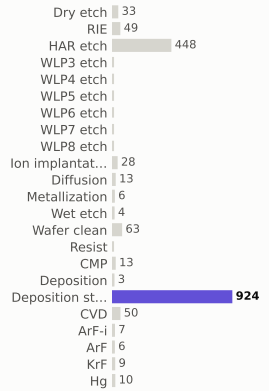

materials deposited (g)

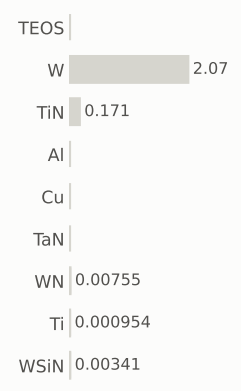

gases emitted (g)

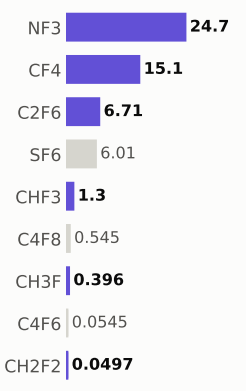

Step #21590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,375.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

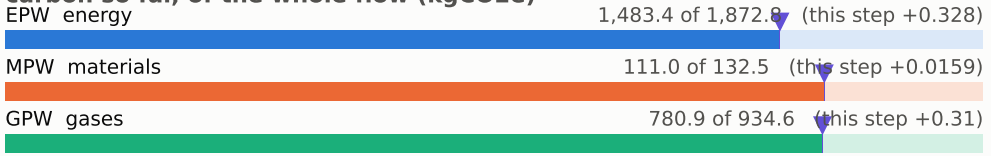

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

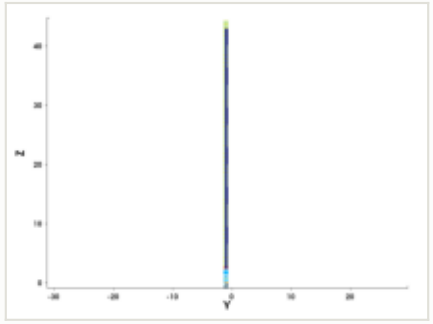

y cut at -1.035 µm

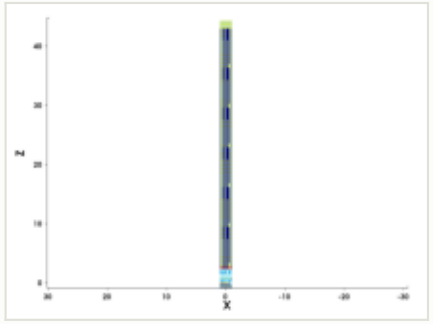

mask for this step

no mask for this step

steps by process area

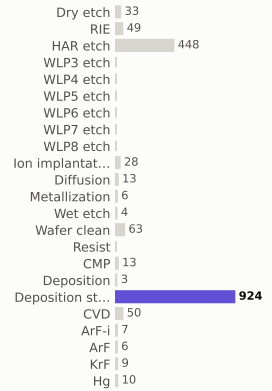

materials deposited (g)

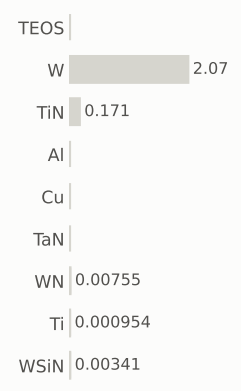

gases emitted (g)

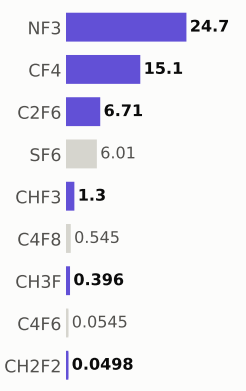

Step #21600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,375.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

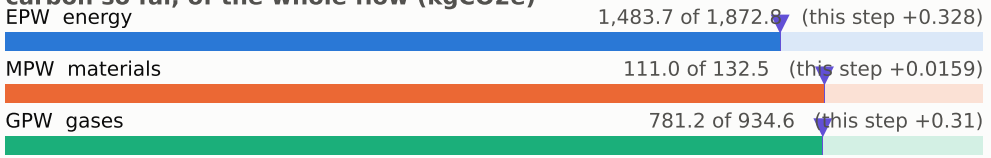

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

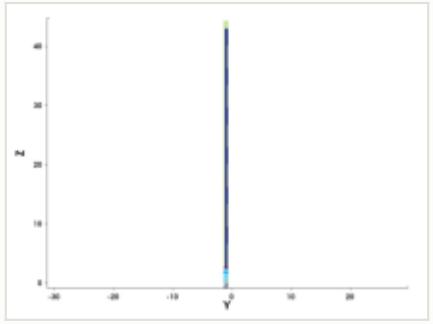

y cut at -1.035 µm

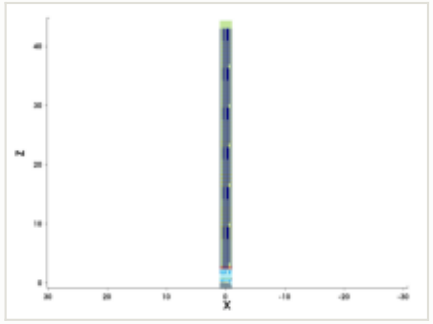

mask for this step

no mask for this step

steps by process area

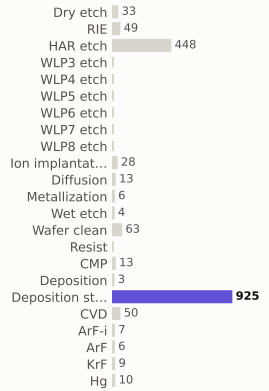

materials deposited (g)

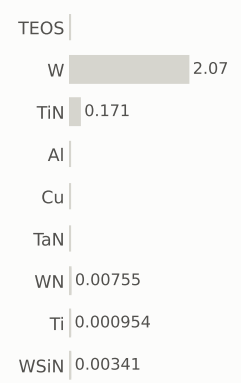

gases emitted (g)

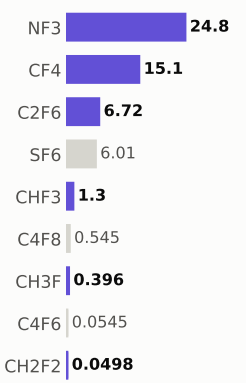

Step #21610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,376.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

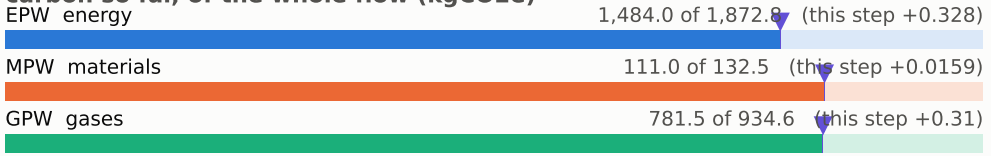

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

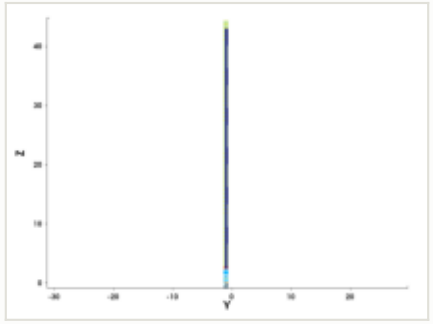

y cut at -1.035 µm

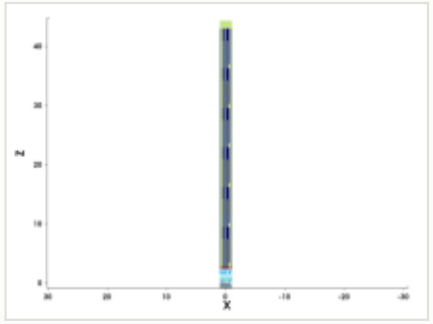

mask for this step

no mask for this step

steps by process area

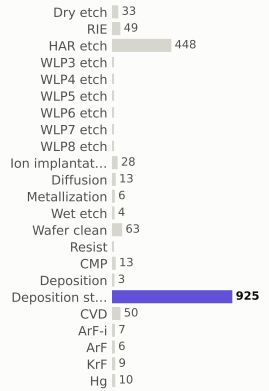

materials deposited (g)

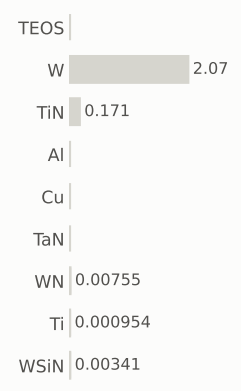

gases emitted (g)

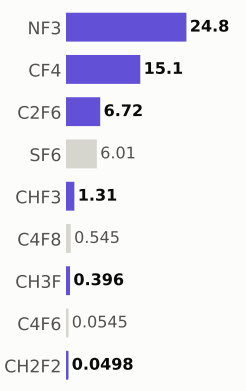

Step #21620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,377.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

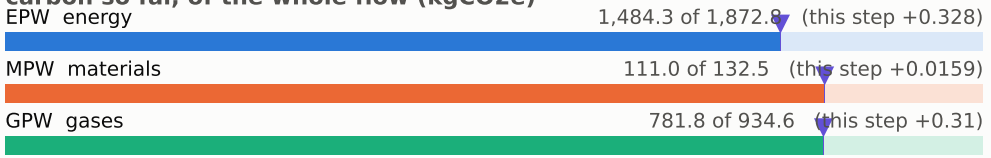

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

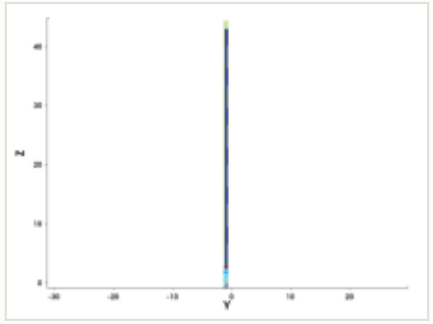

y cut at -1.035 µm

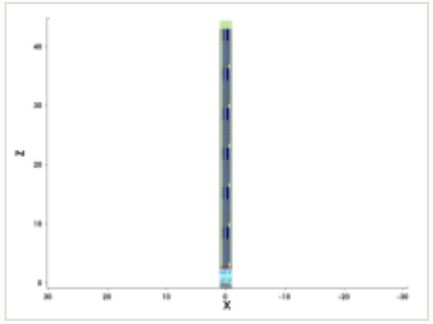

mask for this step

no mask for this step

steps by process area

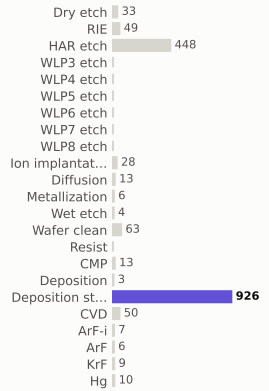

materials deposited (g)

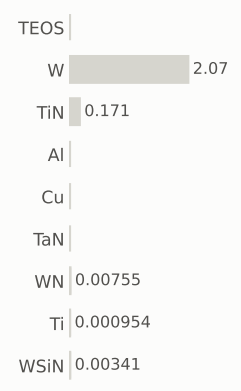

gases emitted (g)

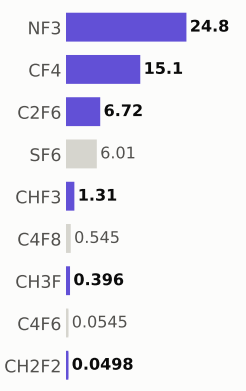

Step #21630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,377.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

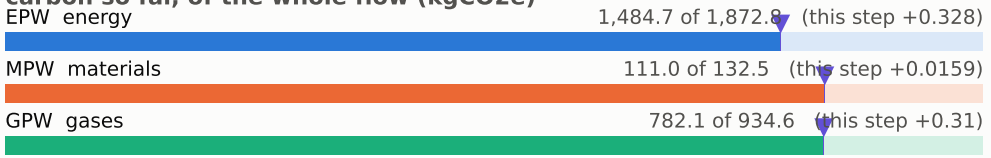

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

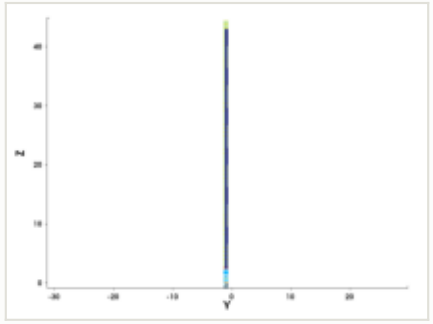

y cut at -1.035 µm

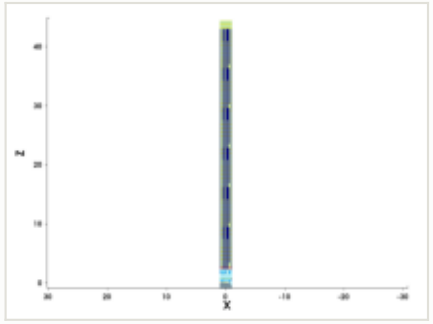

mask for this step

no mask for this step

steps by process area

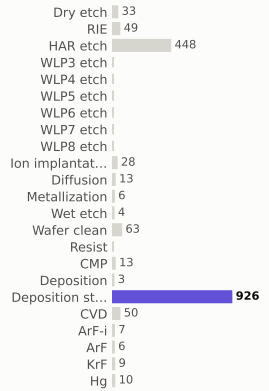

materials deposited (g)

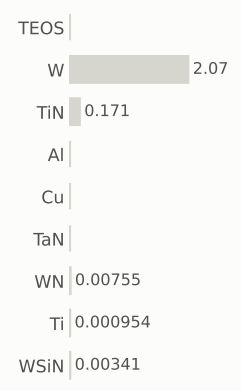

gases emitted (g)

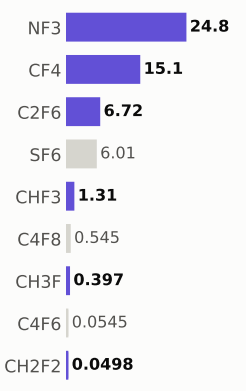

Step #21640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,378.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

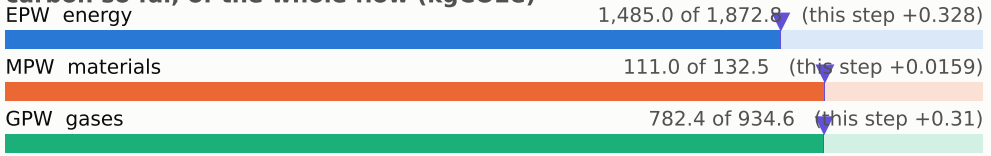

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

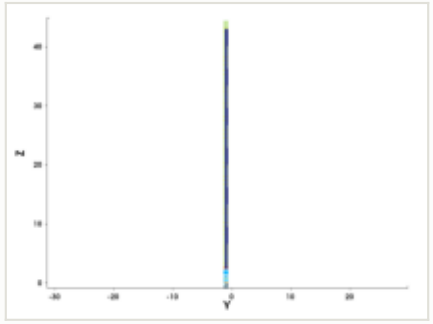

y cut at -1.035 µm

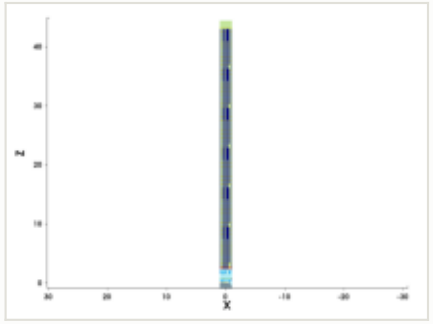

mask for this step

no mask for this step

steps by process area

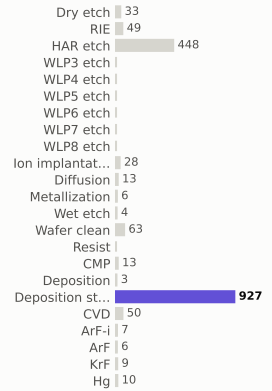

materials deposited (g)

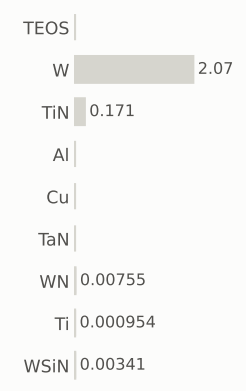

gases emitted (g)

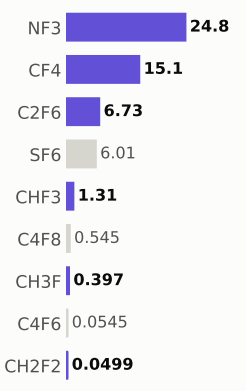

Step #21650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,379.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

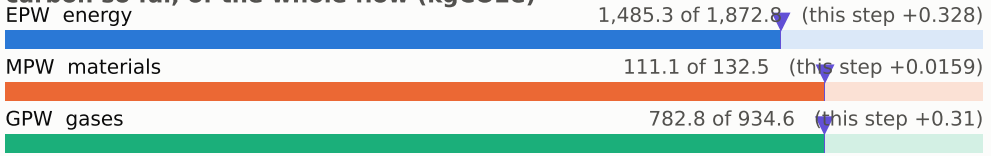

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

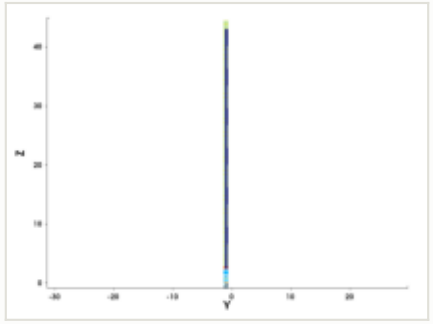

y cut at -1.035 µm

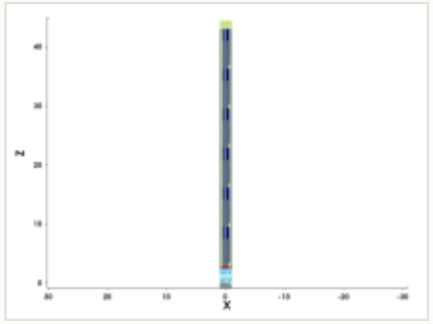

mask for this step

no mask for this step

steps by process area

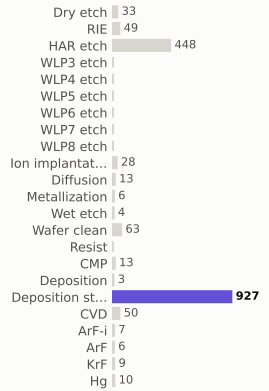

materials deposited (g)

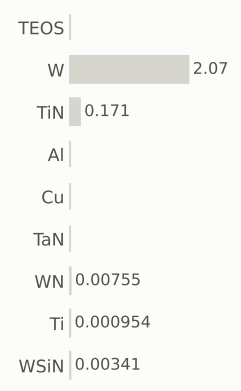

gases emitted (g)

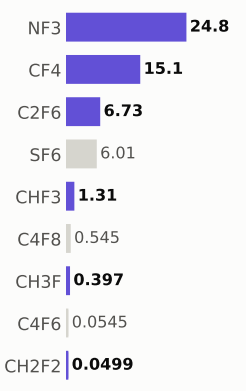

Step #21660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,379.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

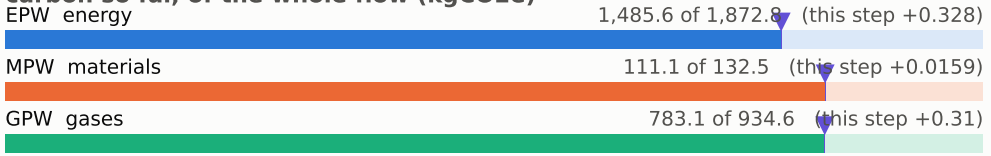

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

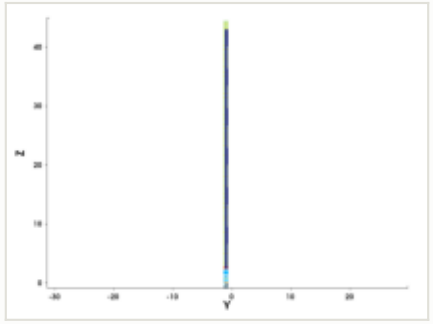

y cut at -1.035 µm

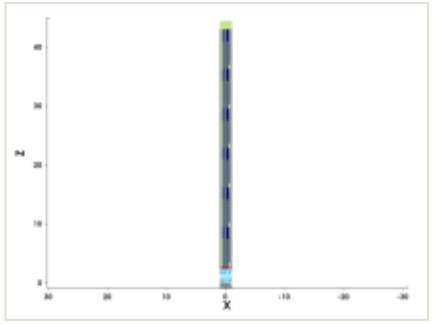

mask for this step

no mask for this step

steps by process area

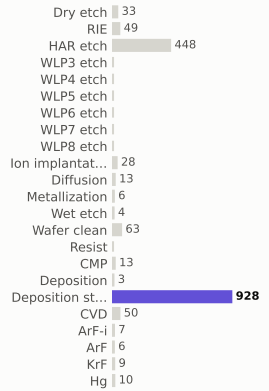

materials deposited (g)

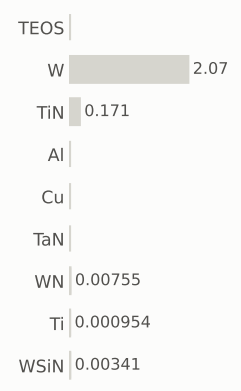

gases emitted (g)

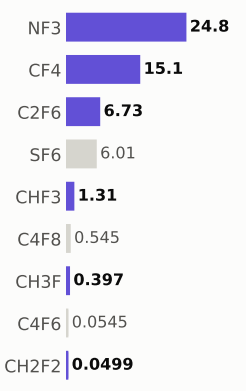

Step #21670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,380.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

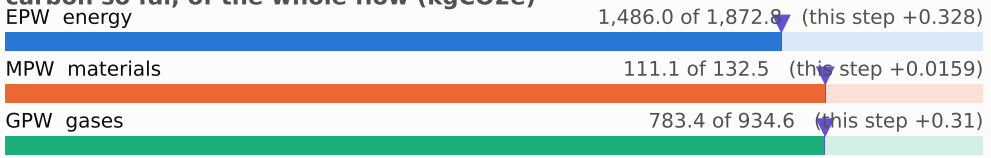

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

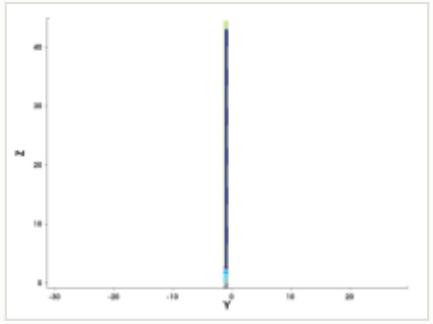

y cut at -1.035 µm

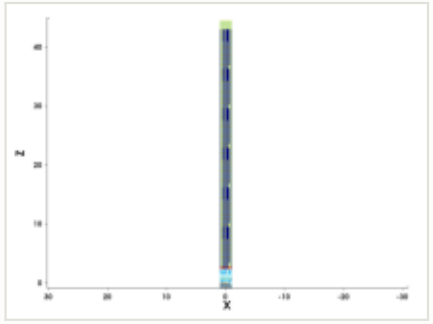

mask for this step

no mask for this step

steps by process area

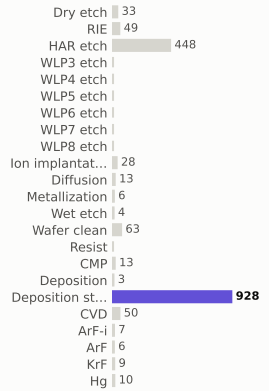

materials deposited (g)

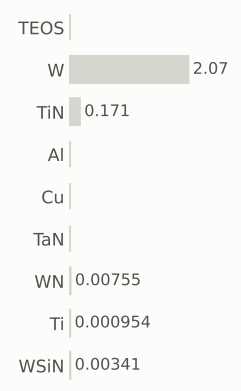

gases emitted (g)

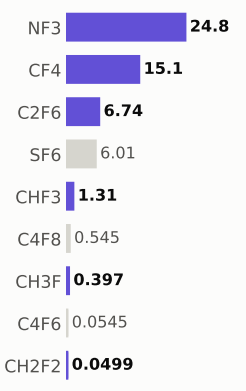

Step #21680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,381.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

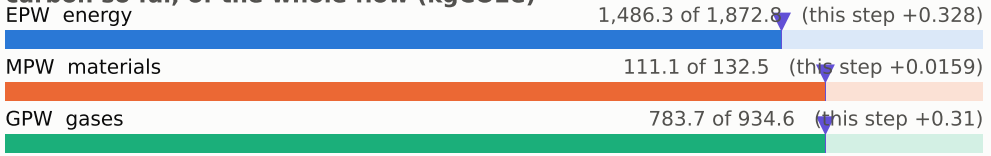

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

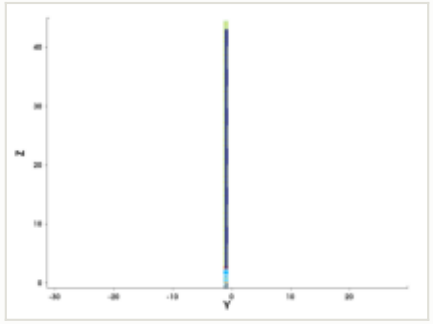

y cut at -1.035 µm

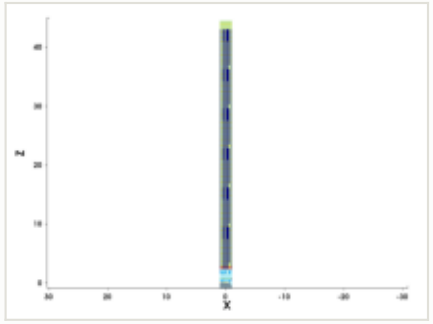

mask for this step

no mask for this step

steps by process area

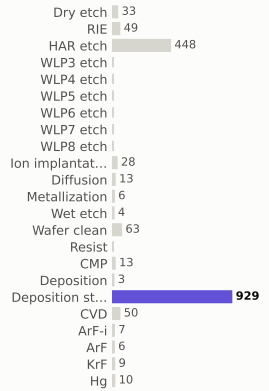

materials deposited (g)

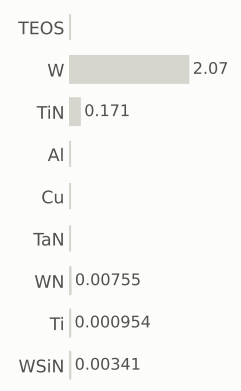

gases emitted (g)

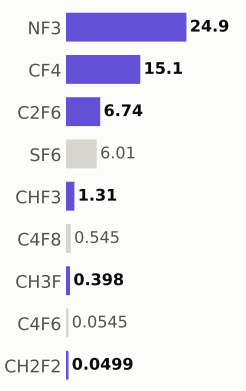

Step #21690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,381.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

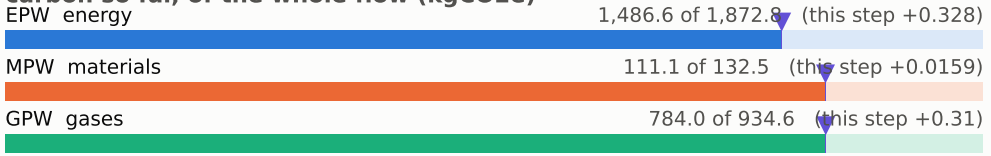

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

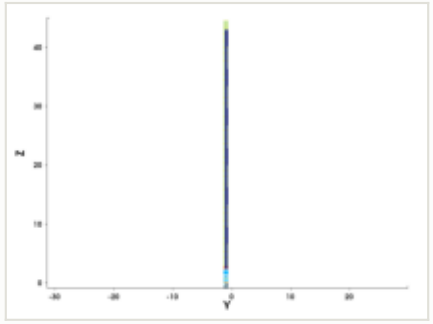

y cut at -1.035 µm

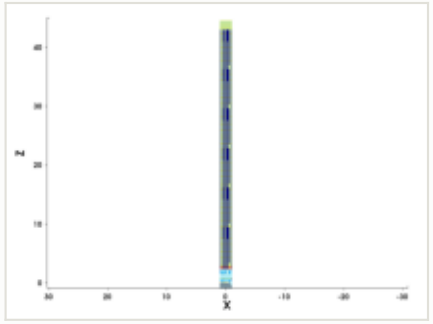

mask for this step

no mask for this step

steps by process area

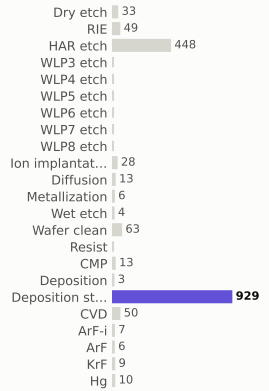

materials deposited (g)

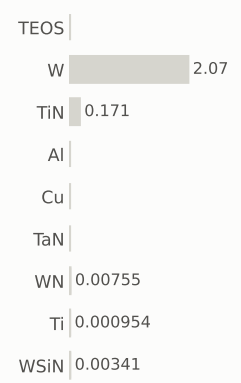

gases emitted (g)

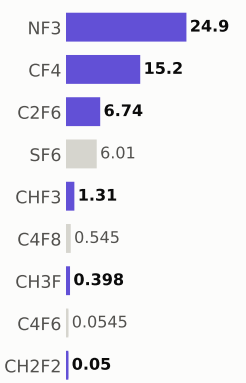

Step #21700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,382.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

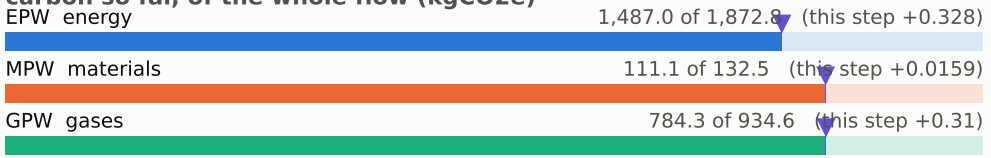

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

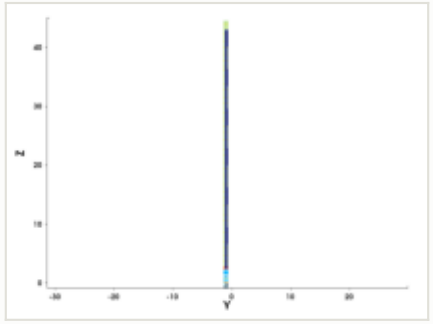

y cut at -1.035 µm

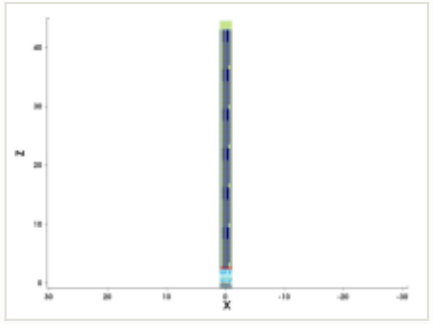

mask for this step

no mask for this step

steps by process area

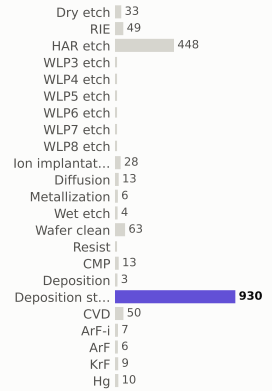

materials deposited (g)

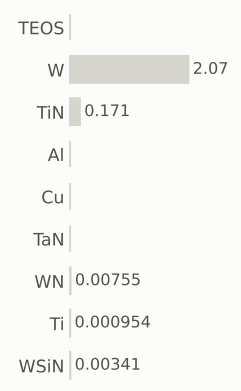

gases emitted (g)

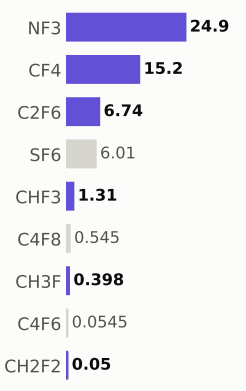

Step #21710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,383.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

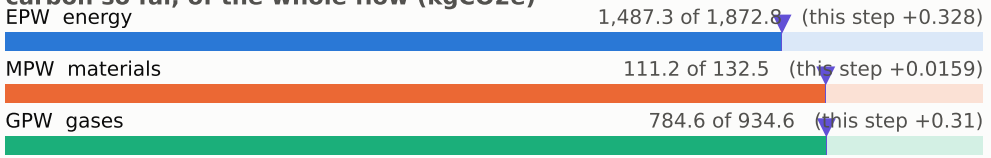

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

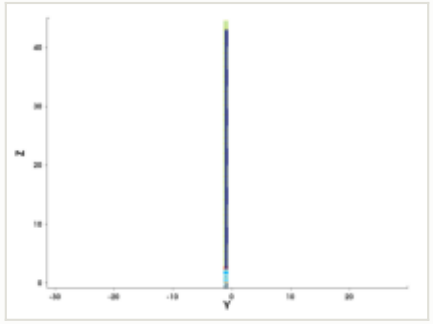

y cut at -1.035 µm

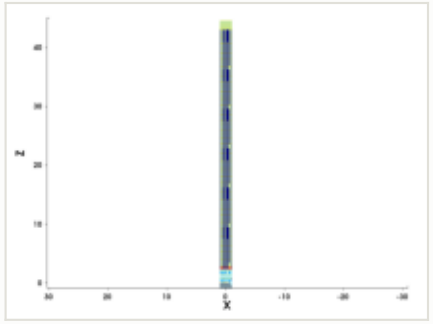

mask for this step

no mask for this step

steps by process area

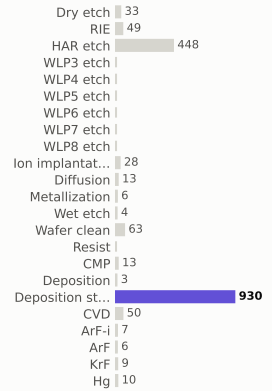

materials deposited (g)

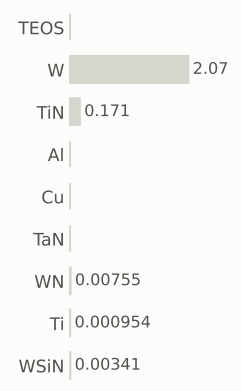

gases emitted (g)

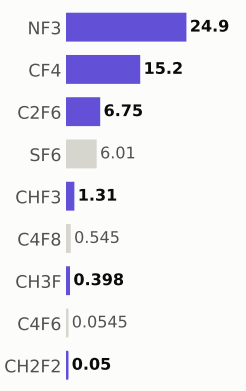

Step #21720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,383.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

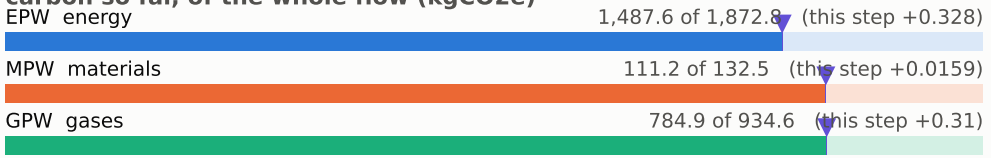

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

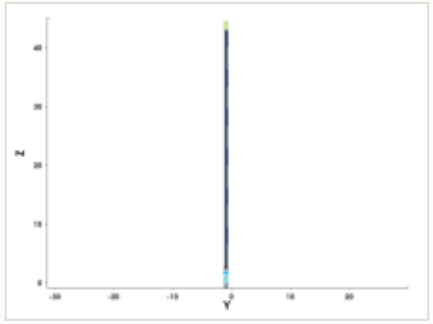

y cut at -1.035 µm

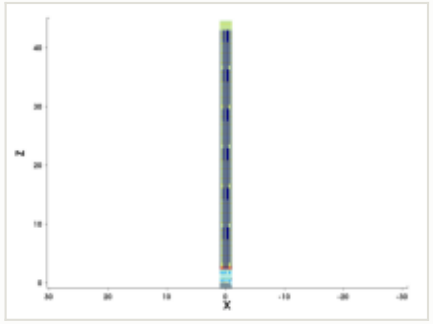

mask for this step

no mask for this step

steps by process area

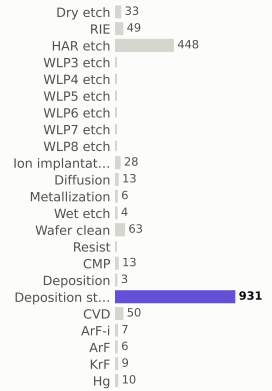

materials deposited (g)

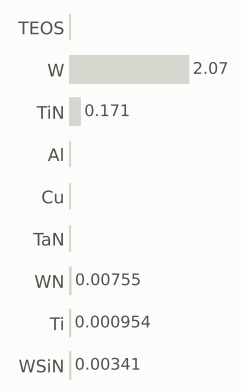

gases emitted (g)

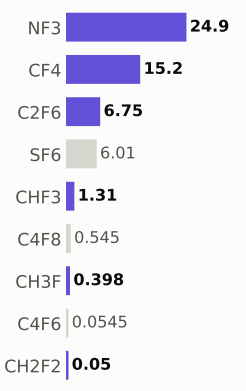

Step #21730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,384.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

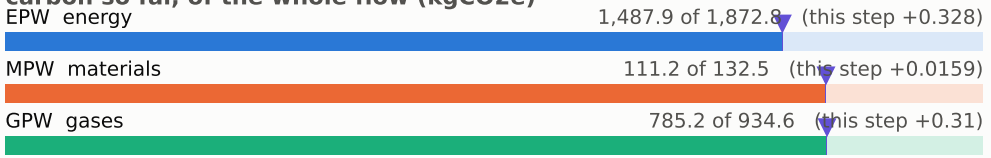

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

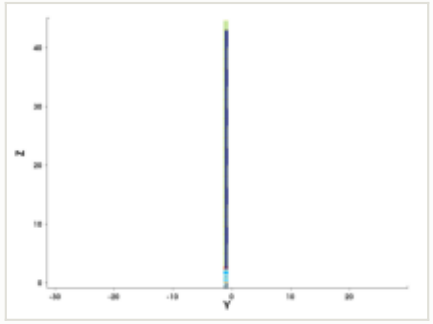

y cut at -1.035 µm

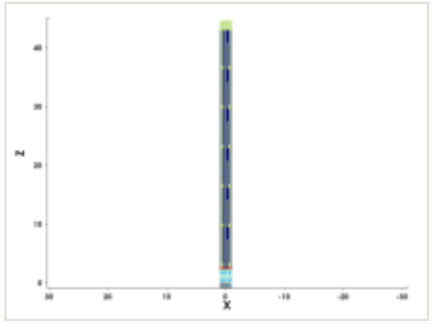

mask for this step

no mask for this step

steps by process area

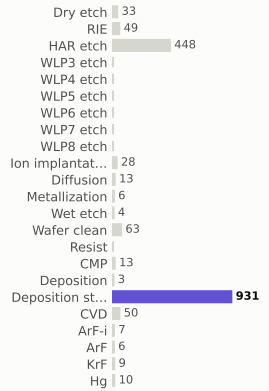

materials deposited (g)

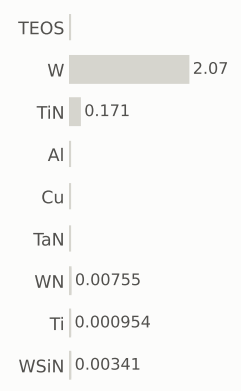

gases emitted (g)

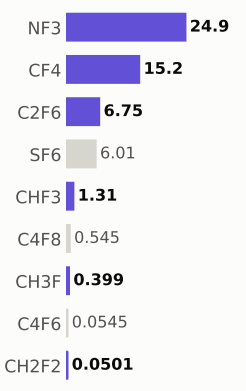

Step #21740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,385.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

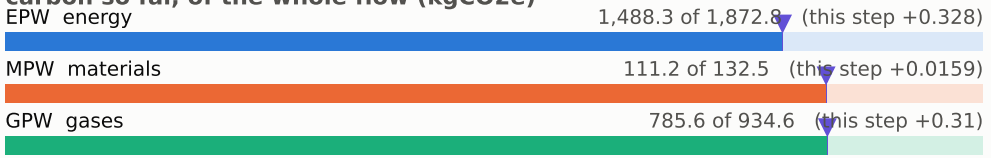

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

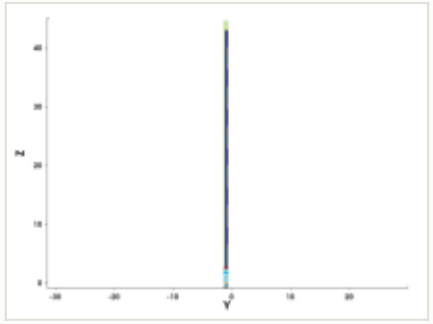

y cut at -1.035 µm

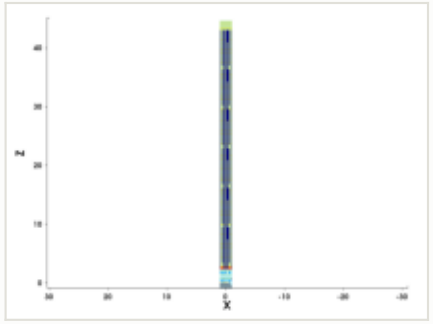

mask for this step

no mask for this step

steps by process area

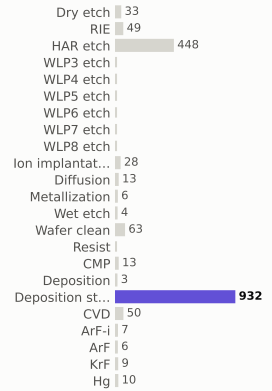

materials deposited (g)

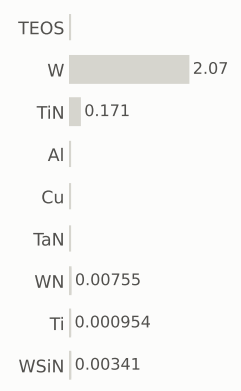

gases emitted (g)

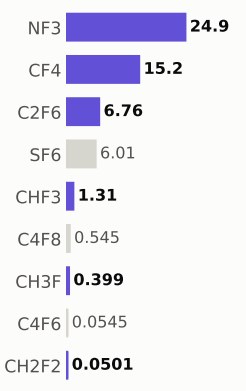

Step #21750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,385.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

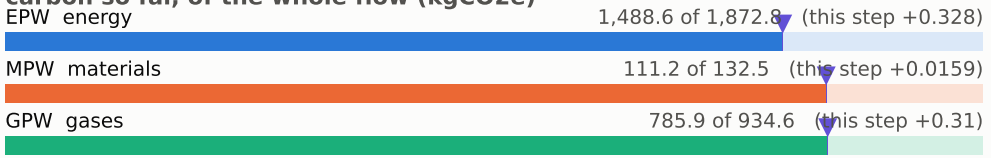

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

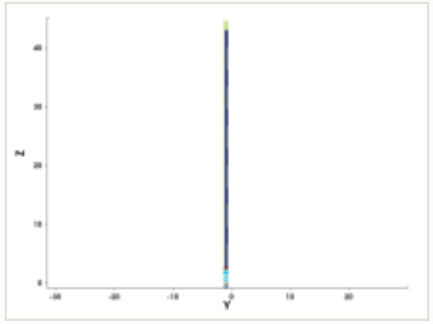

y cut at -1.035 µm

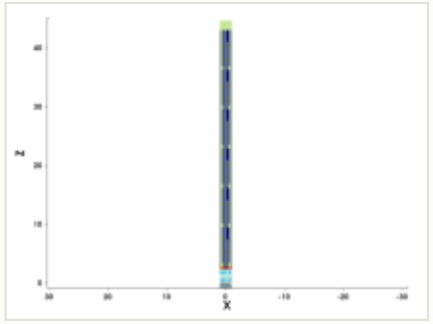

mask for this step

no mask for this step

steps by process area

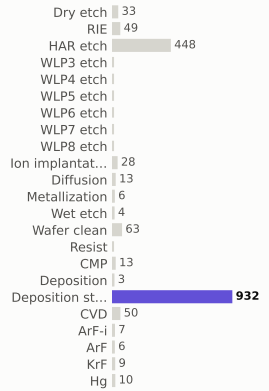

materials deposited (g)

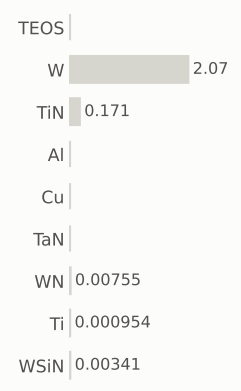

gases emitted (g)

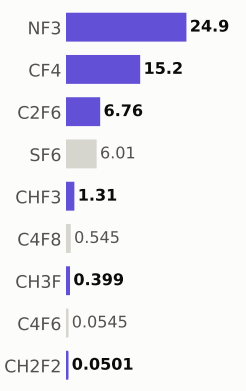

Step #21760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,386.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

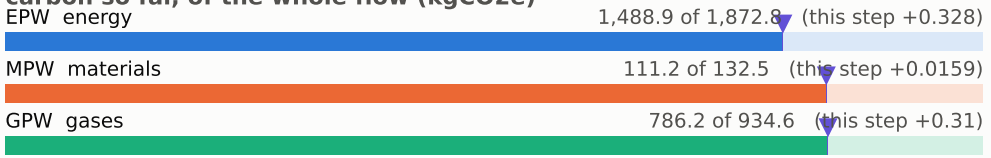

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

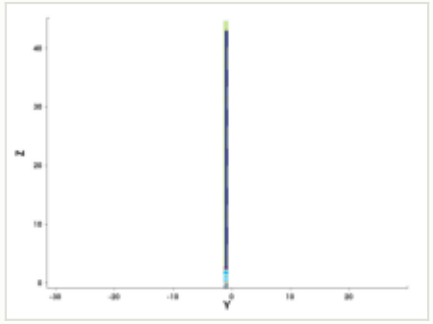

y cut at -1.035 µm

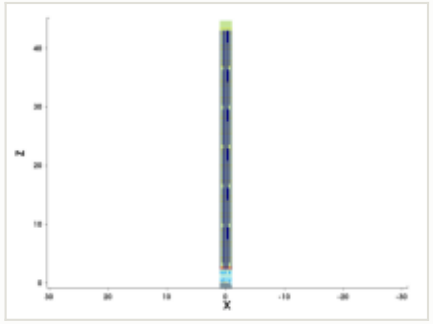

mask for this step

no mask for this step

steps by process area

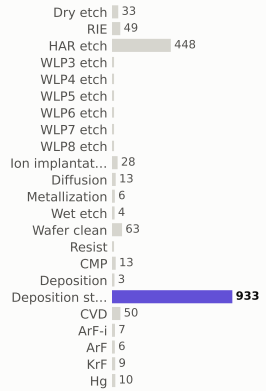

materials deposited (g)

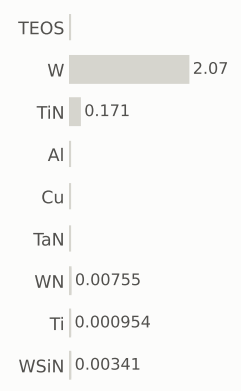

gases emitted (g)



Step #21770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,387.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

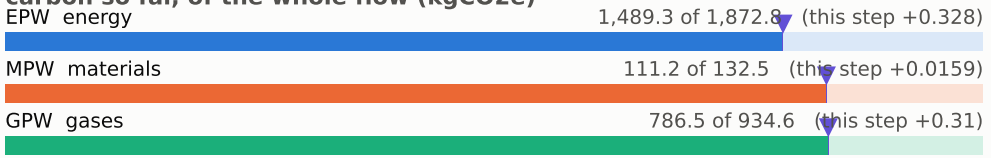

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

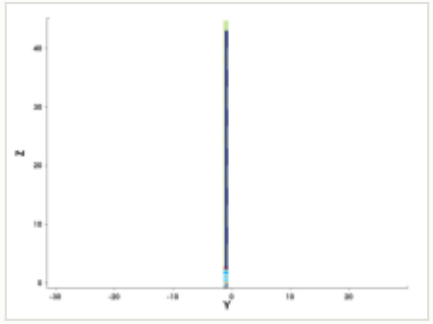

y cut at -1.035 µm

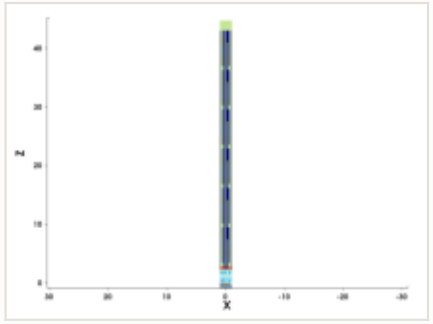

mask for this step

no mask for this step

steps by process area

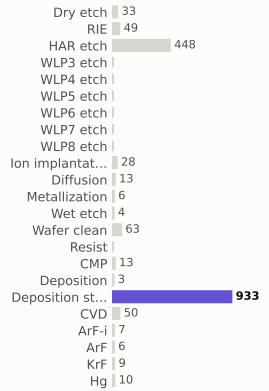

materials deposited (g)

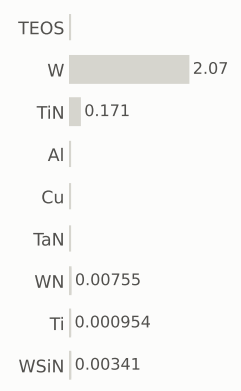

gases emitted (g)

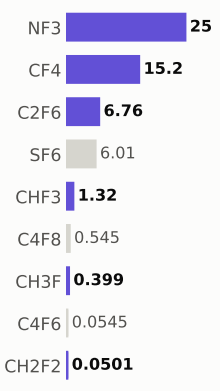

Step #21780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,387.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

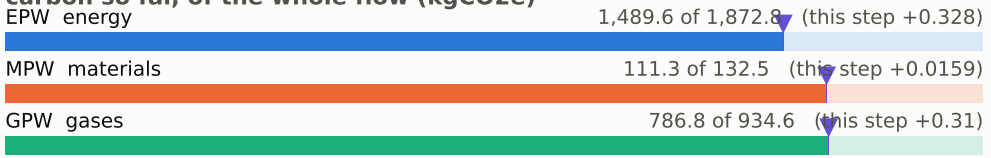

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

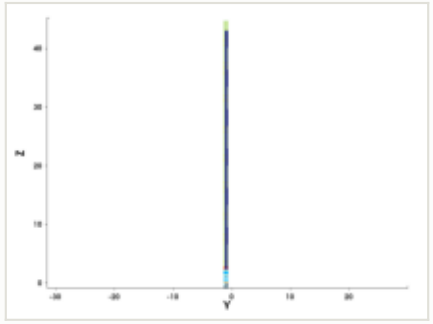

y cut at -1.035 µm

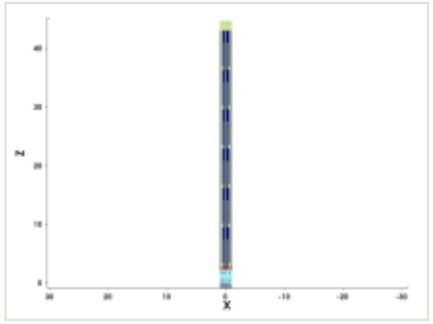

mask for this step

no mask for this step

steps by process area

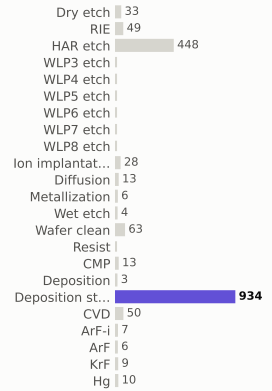

materials deposited (g)

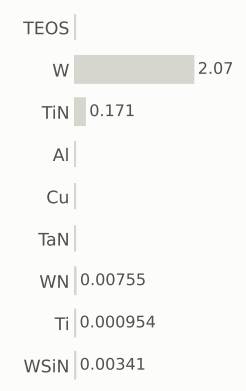

gases emitted (g)

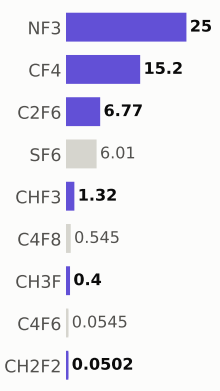

Step #21790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,388.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

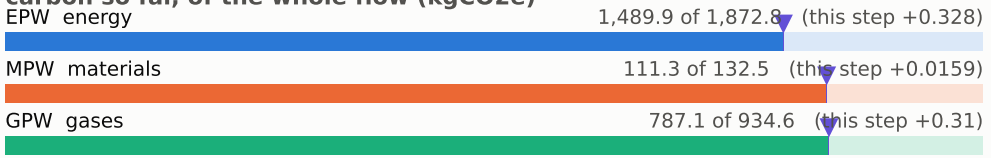

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

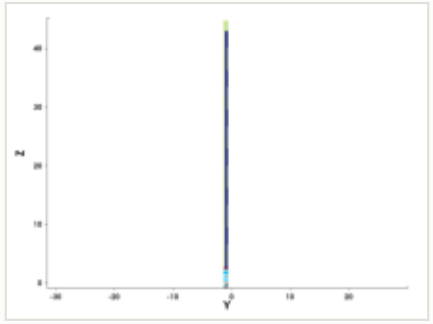

y cut at -1.035 µm

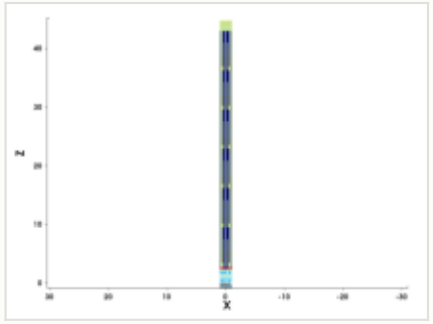

mask for this step

no mask for this step

steps by process area

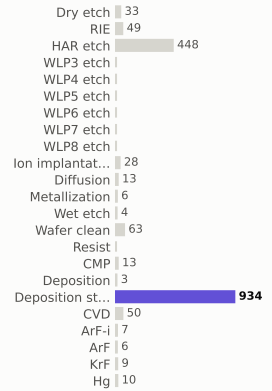

materials deposited (g)

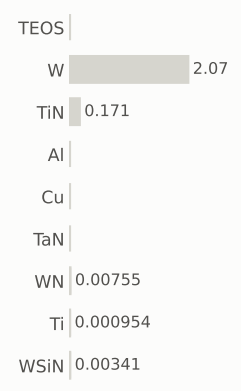

gases emitted (g)

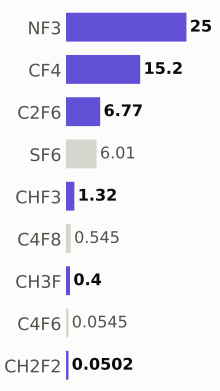

Step #21800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,388.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

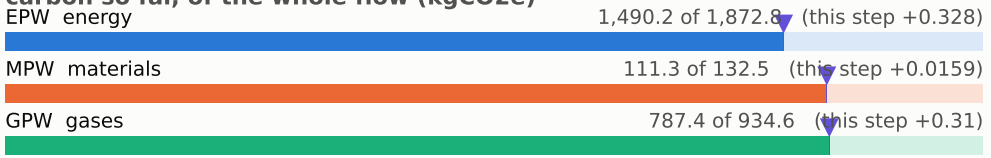

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

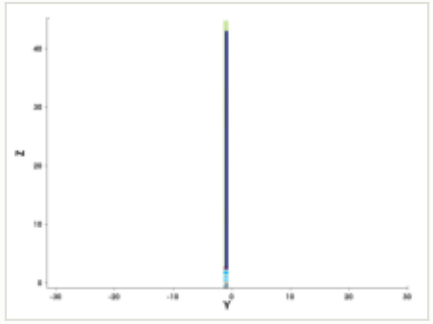

y cut at -1.035 µm

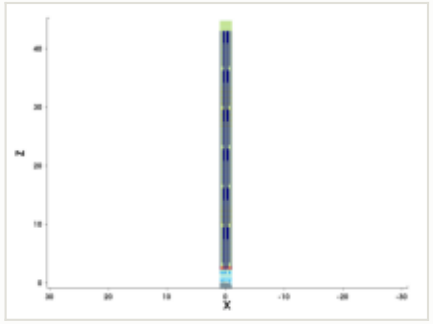

mask for this step

no mask for this step

steps by process area

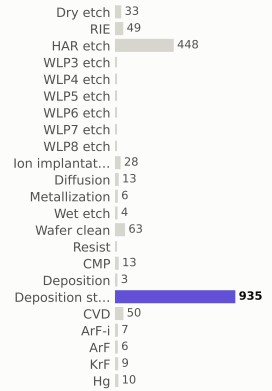

materials deposited (g)

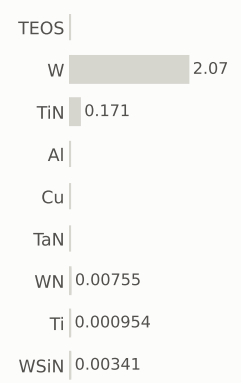

gases emitted (g)

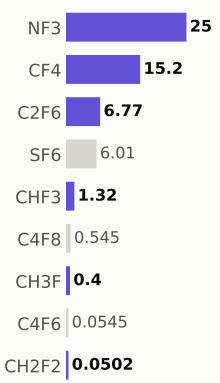

Step #21810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,389.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

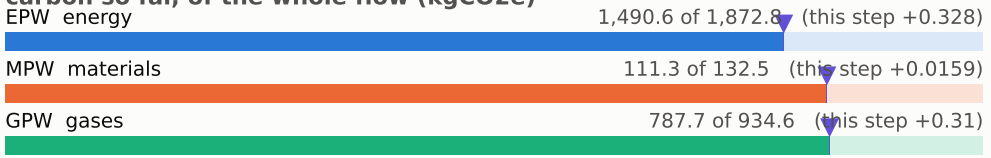

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

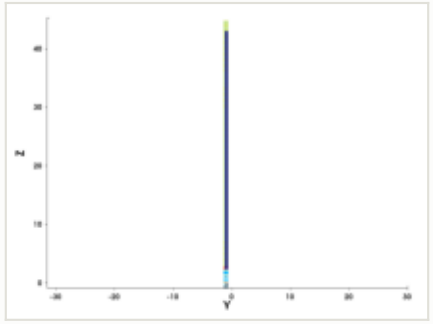

y cut at -1.035 µm

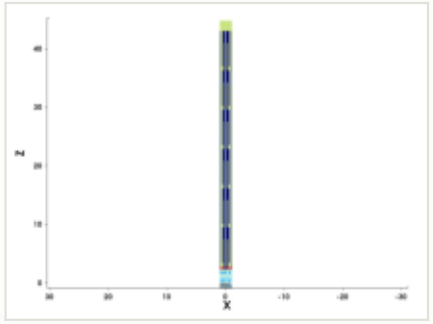

mask for this step

no mask for this step

steps by process area

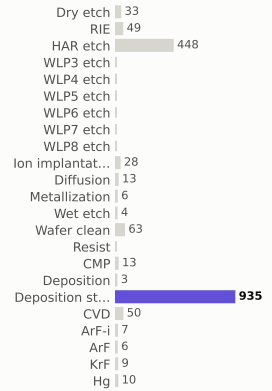

materials deposited (g)

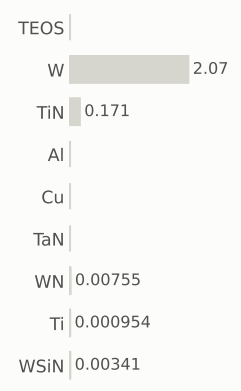

gases emitted (g)

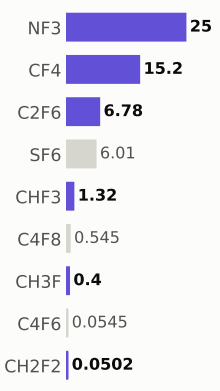

Step #21820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,390.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

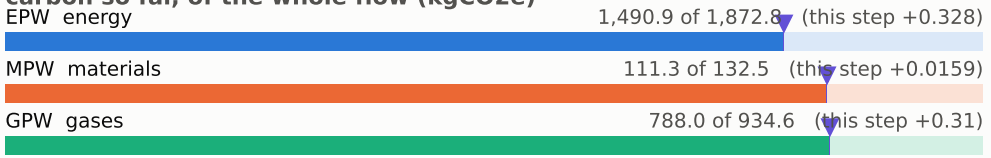

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

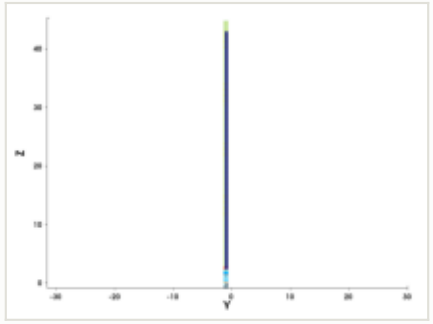

y cut at -1.035 µm

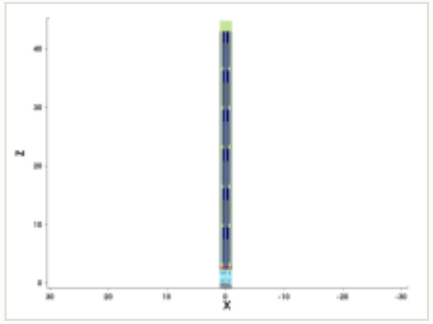

mask for this step

no mask for this step

steps by process area

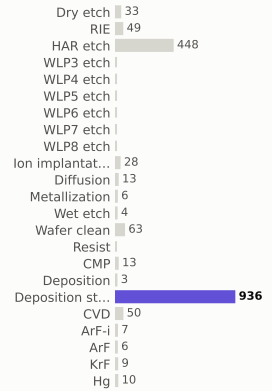

materials deposited (g)

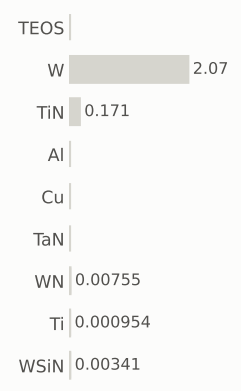

gases emitted (g)

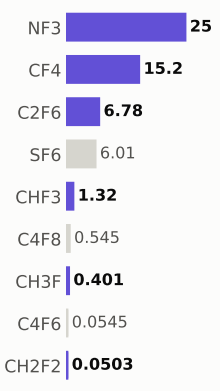

Step #21830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,390.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

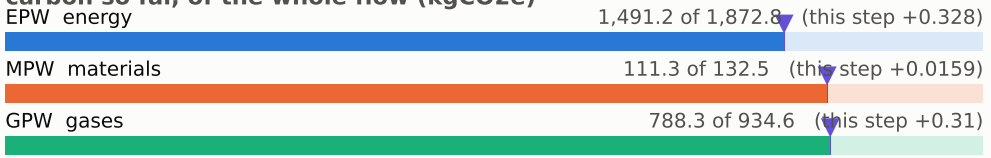

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

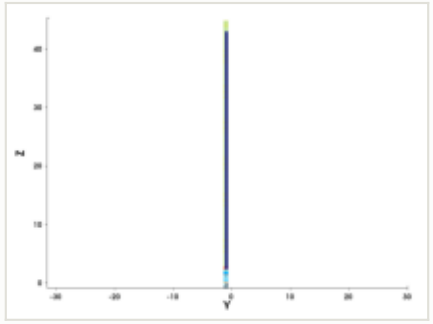

y cut at -1.035 µm

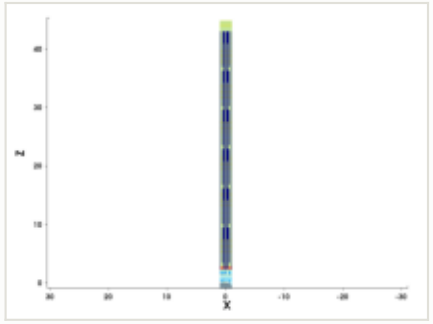

mask for this step

no mask for this step

steps by process area

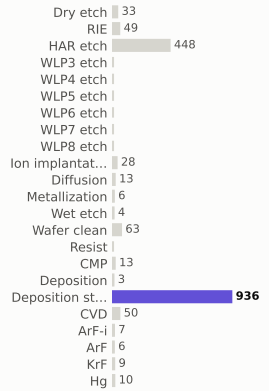

materials deposited (g)

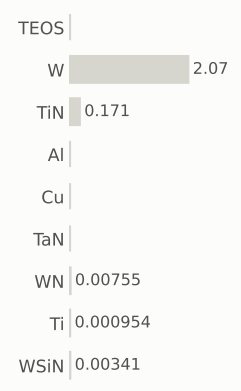

gases emitted (g)

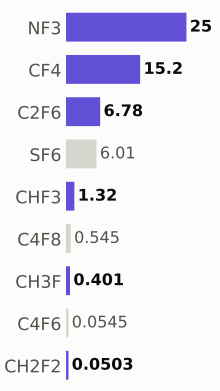

Step #21840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,391.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

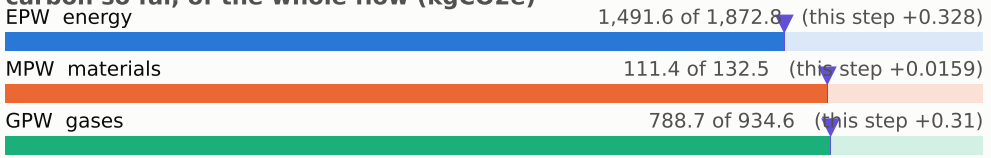

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

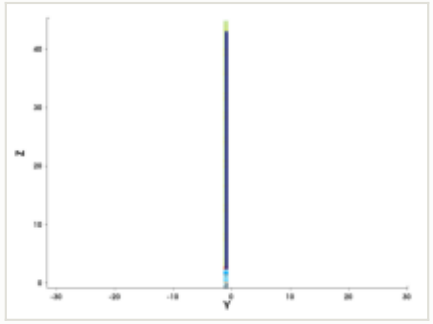

y cut at -1.035 µm

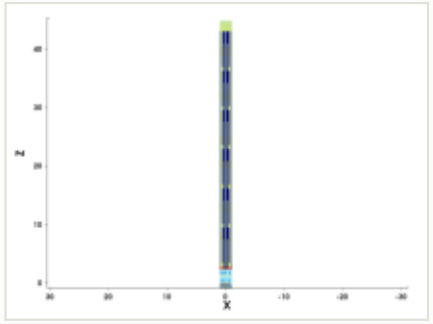

mask for this step

no mask for this step

steps by process area

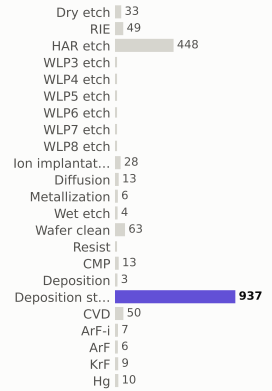

materials deposited (g)

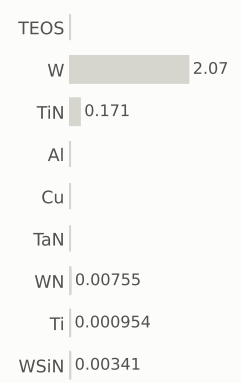

gases emitted (g)

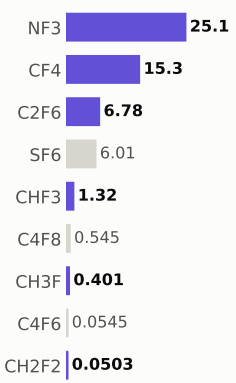

Step #21850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,392.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

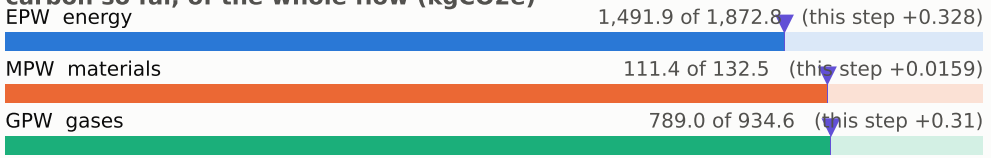

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

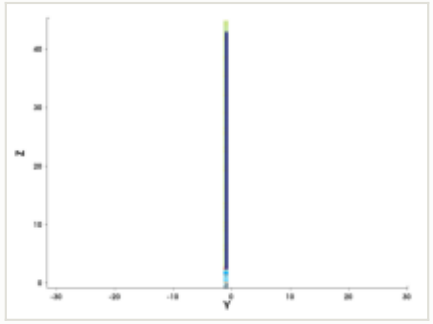

y cut at -1.035 µm

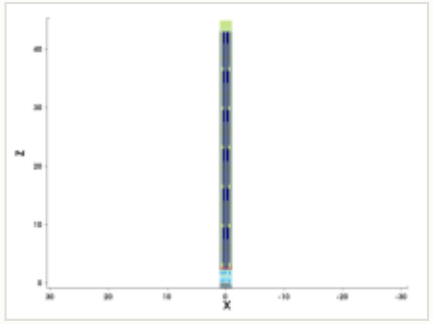

mask for this step

no mask for this step

steps by process area

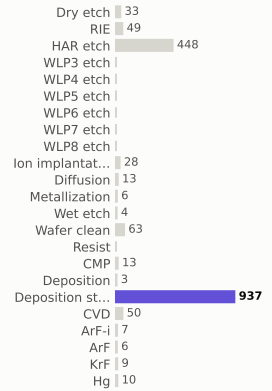

materials deposited (g)

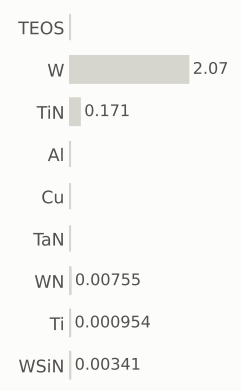

gases emitted (g)

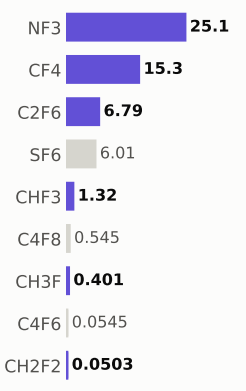

Step #21860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,392.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

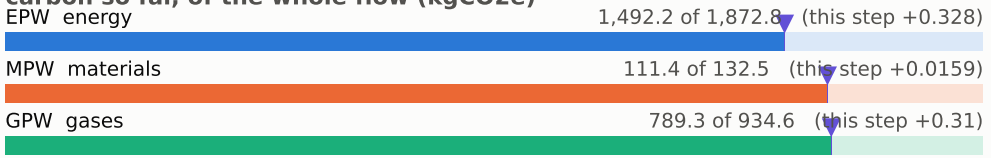

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

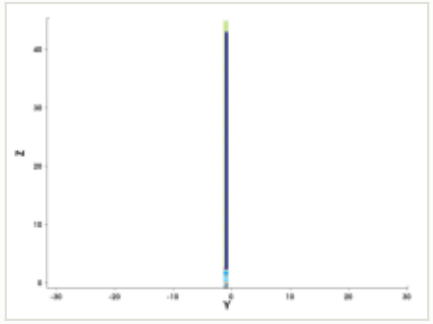

y cut at -1.035 µm

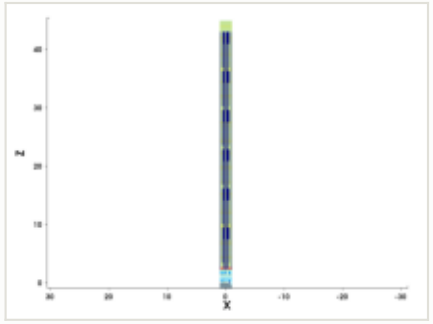

mask for this step

no mask for this step

steps by process area

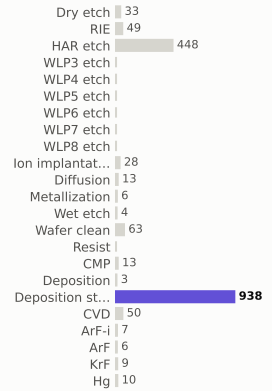

materials deposited (g)

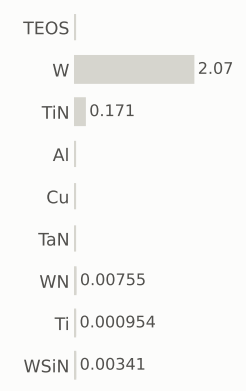

gases emitted (g)

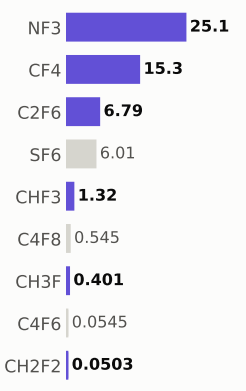

Step #21870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,393.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

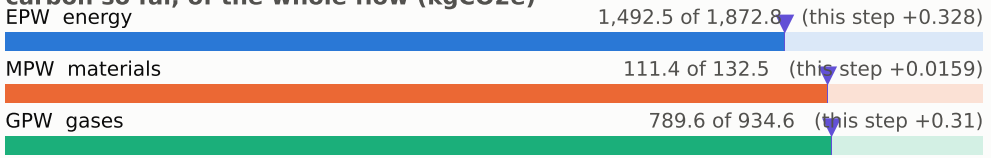

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

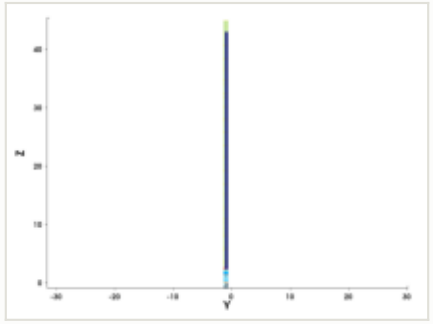

y cut at -1.035 µm

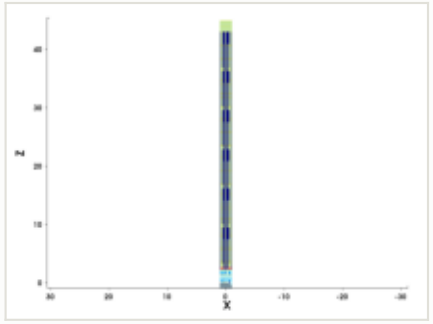

mask for this step

no mask for this step

steps by process area

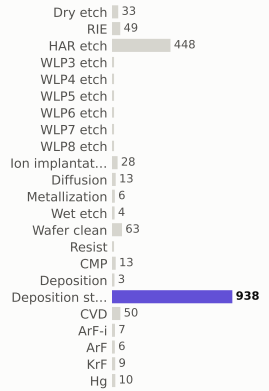

materials deposited (g)

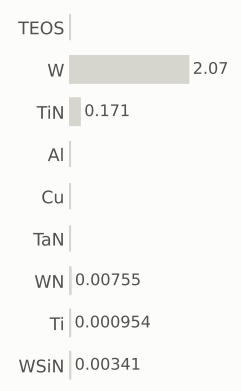

gases emitted (g)

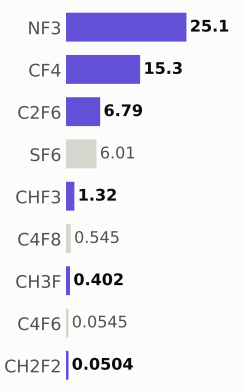

Step #21880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,394.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

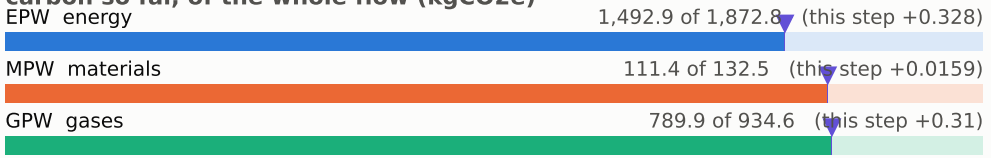

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

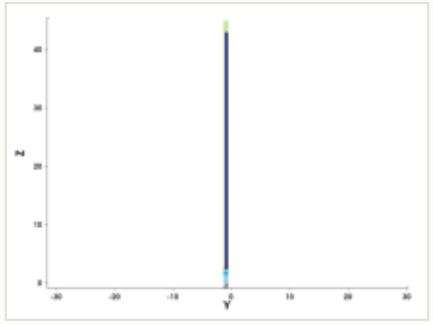

y cut at -1.035 µm

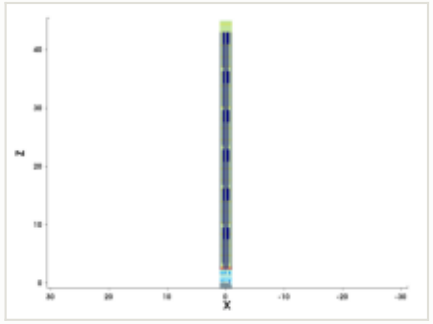

mask for this step

no mask for this step

steps by process area

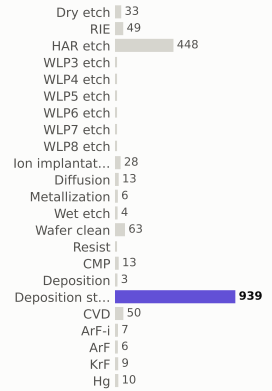

materials deposited (g)

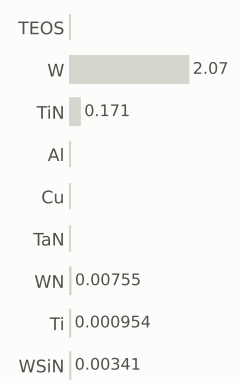

gases emitted (g)

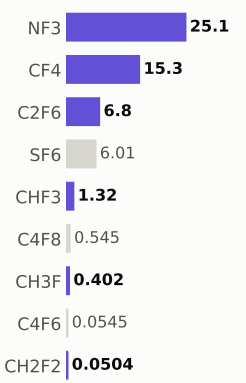

Step #21890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,394.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

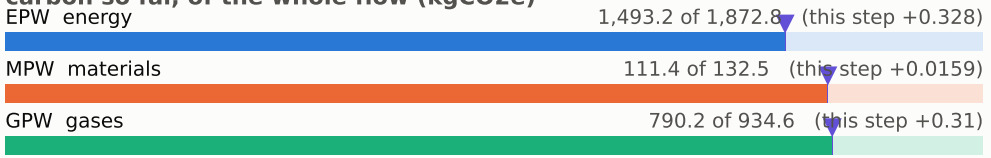

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

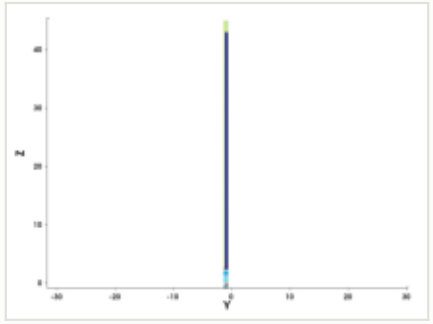

y cut at -1.035 µm

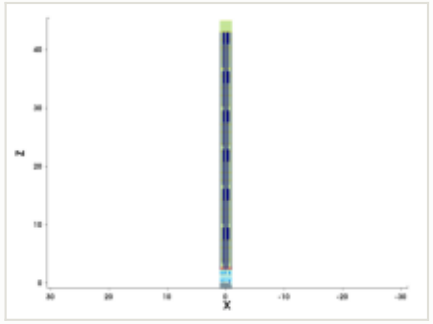

mask for this step

no mask for this step

steps by process area

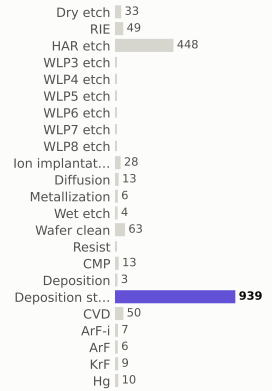

materials deposited (g)

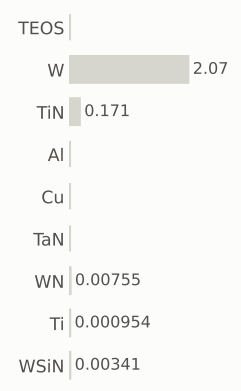

gases emitted (g)

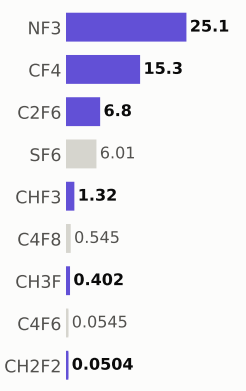

Step #21900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,395.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

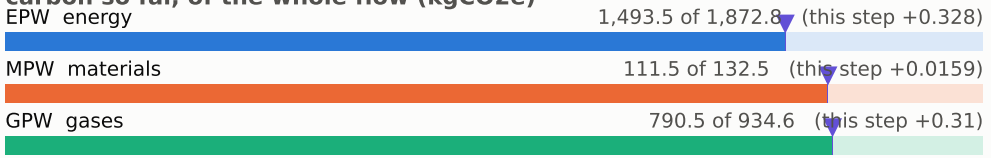

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

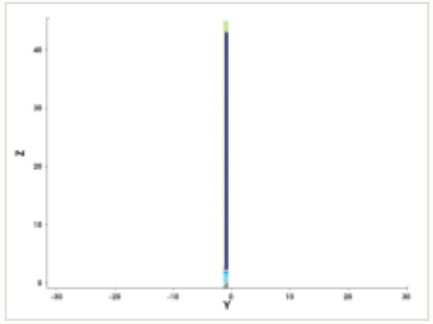

y cut at -1.035 µm

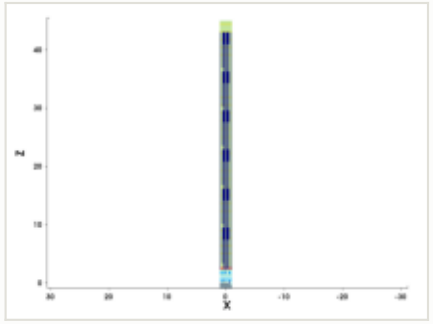

mask for this step

no mask for this step

steps by process area

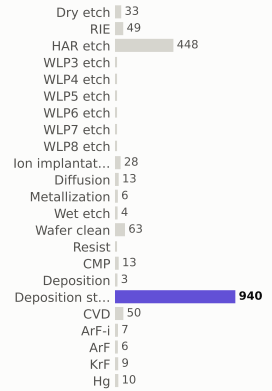

materials deposited (g)

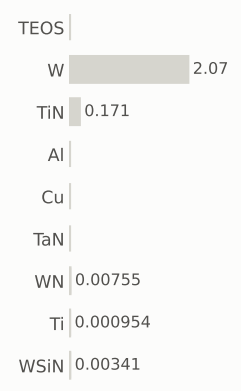

gases emitted (g)

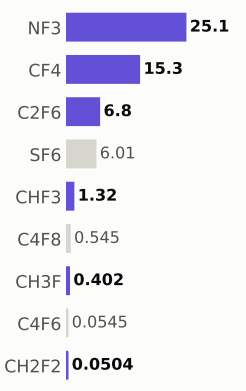

Step #21910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,396.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

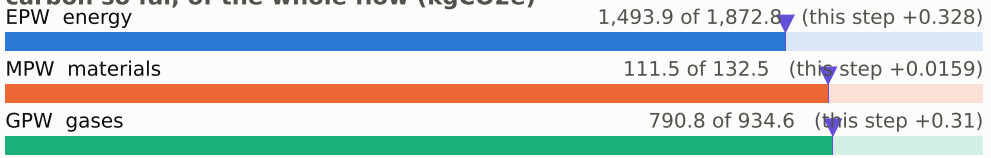

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

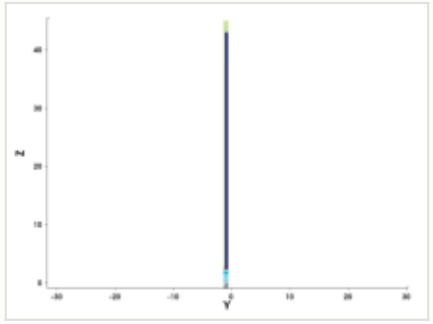

y cut at -1.035 µm

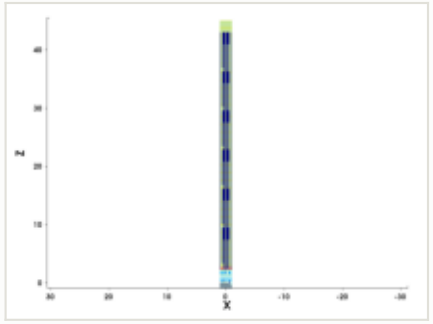

mask for this step

no mask for this step

steps by process area

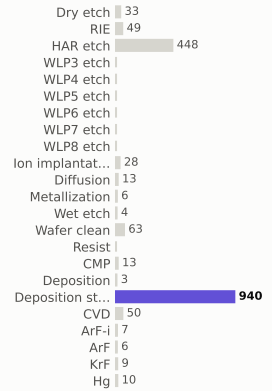

materials deposited (g)

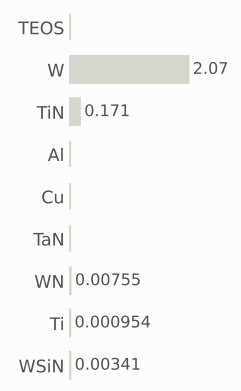

gases emitted (g)

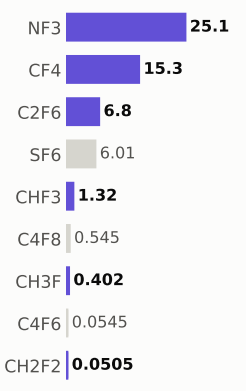

Step #21920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,396.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

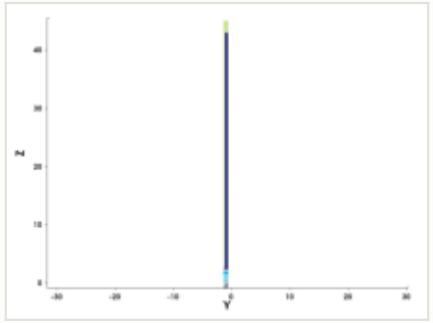

y cut at -1.035 µm

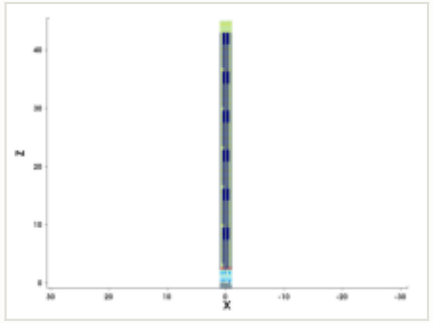

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

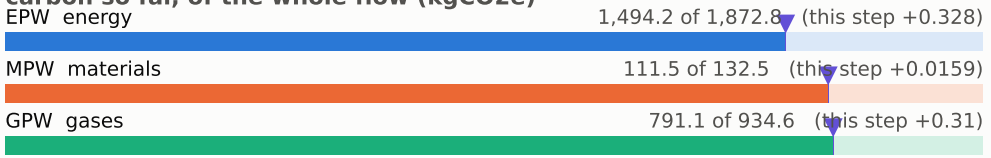

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

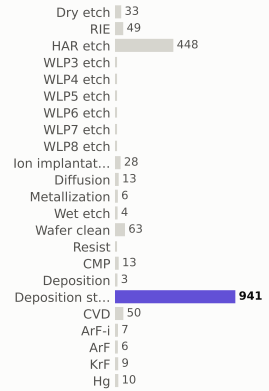

materials deposited (g)

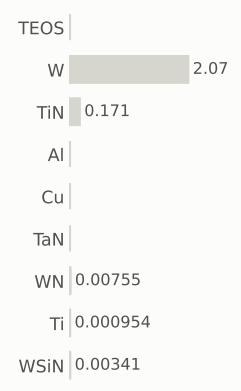

gases emitted (g)

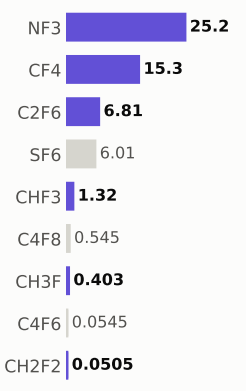

Step #21930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,397.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

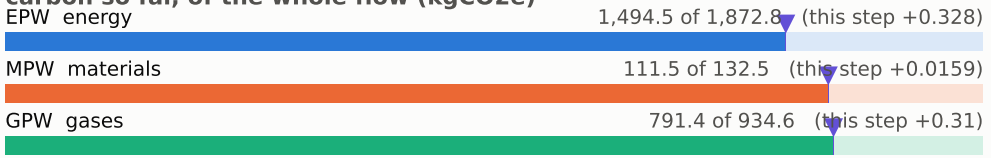

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

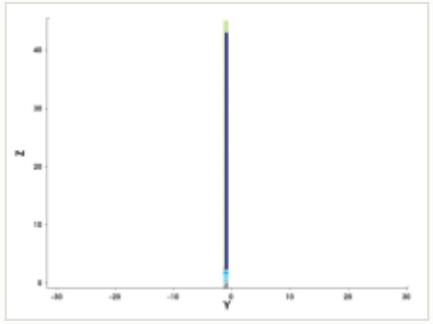

y cut at -1.035 µm

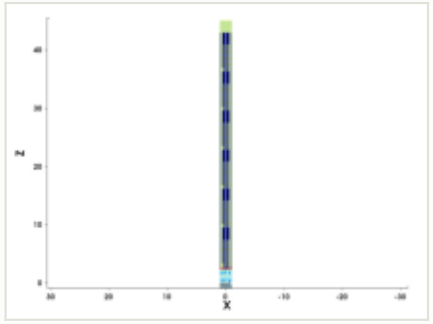

mask for this step

no mask for this step

steps by process area

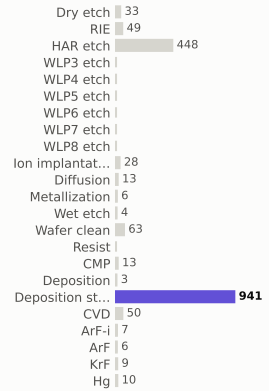

materials deposited (g)

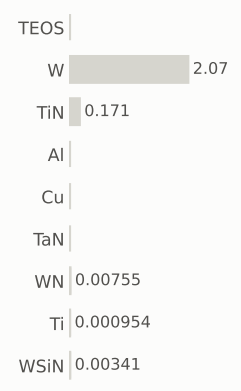

gases emitted (g)

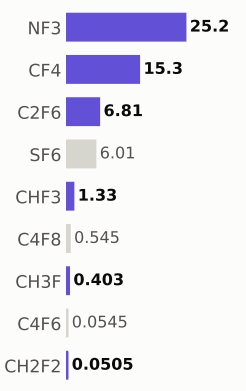

Step #21940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,398.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

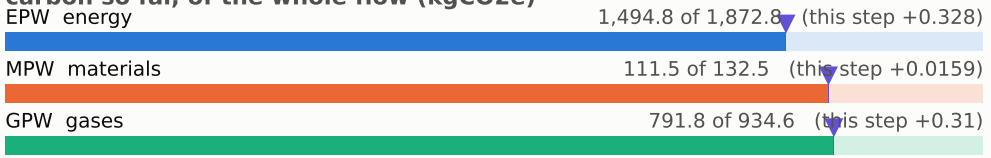

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

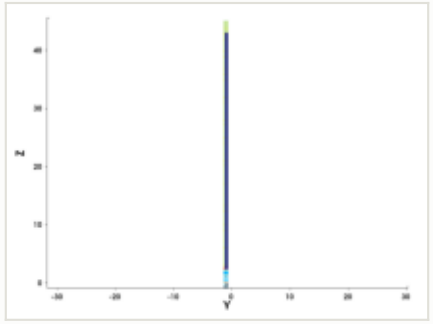

y cut at -1.035 µm

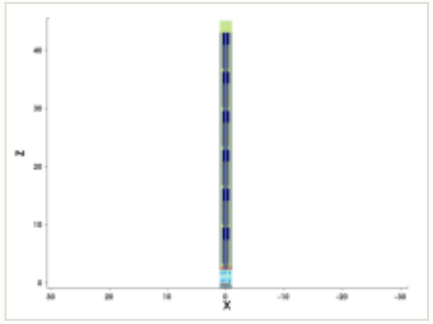

mask for this step

no mask for this step

steps by process area

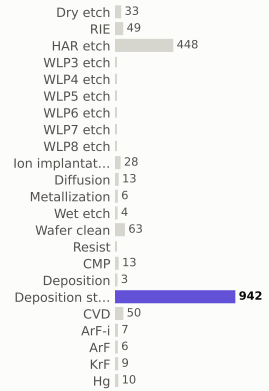

materials deposited (g)

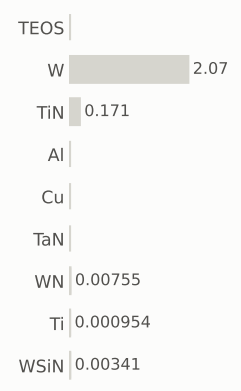

gases emitted (g)

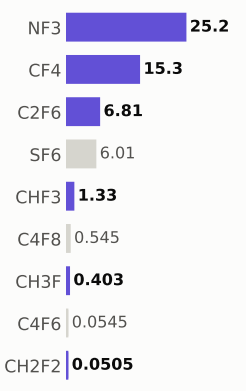

Step #21950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,398.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

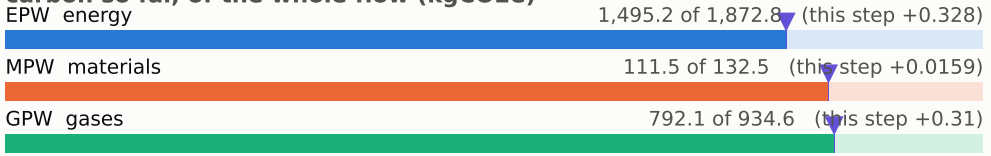

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

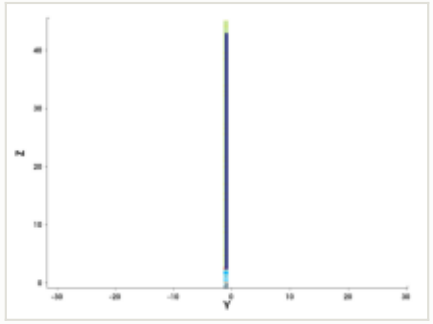

y cut at -1.035 µm

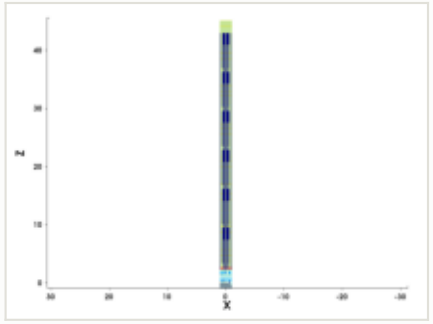

mask for this step

no mask for this step

steps by process area

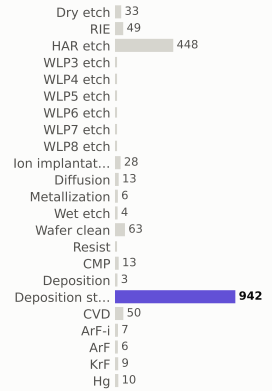

materials deposited (g)

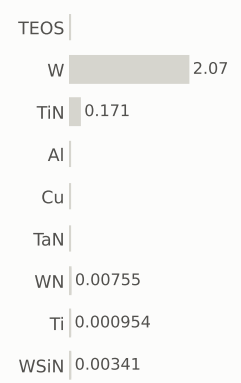

gases emitted (g)

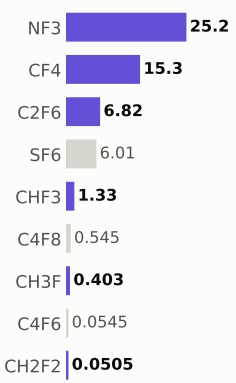

Step #21960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,399.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

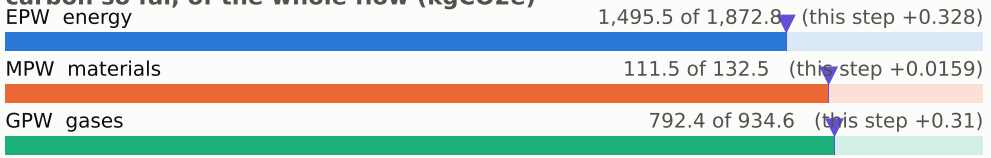

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

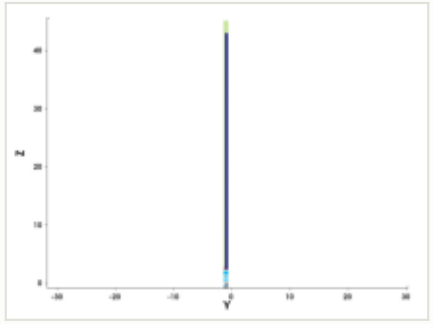

y cut at -1.035 µm

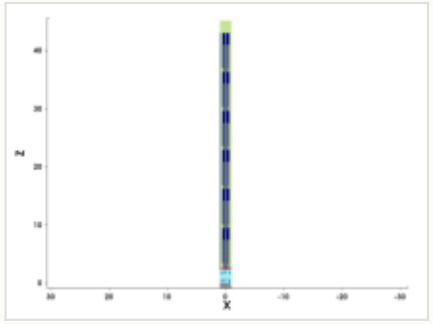

mask for this step

no mask for this step

steps by process area

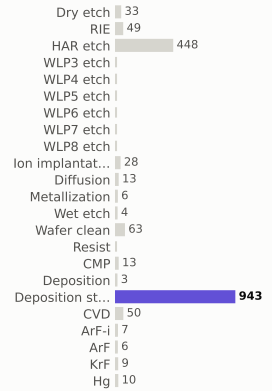

materials deposited (g)

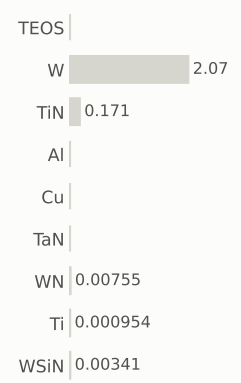

gases emitted (g)

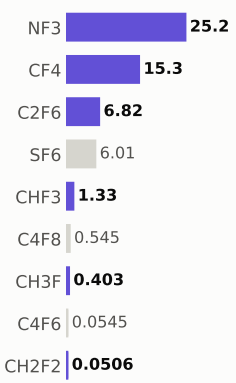

Step #21970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,400.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

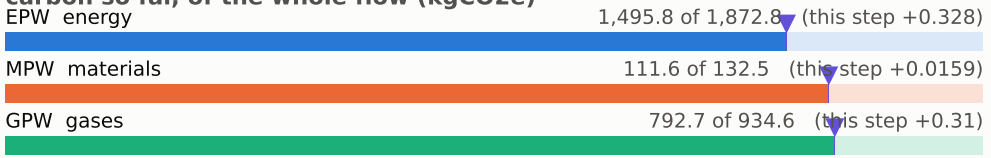

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

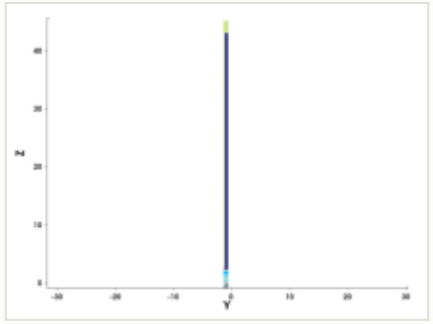

y cut at -1.035 µm

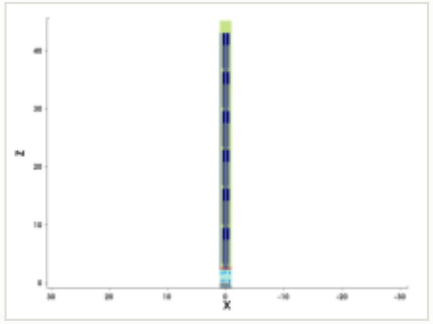

mask for this step

no mask for this step

steps by process area

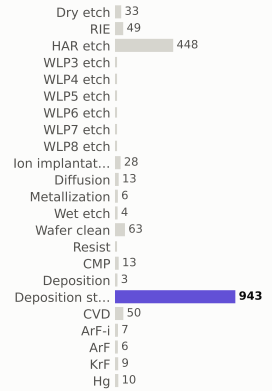

materials deposited (g)

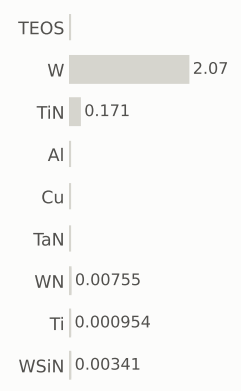

gases emitted (g)

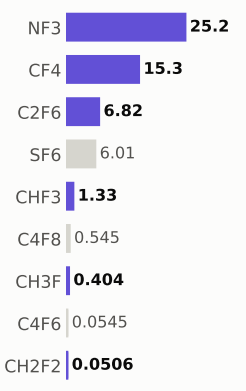

Step #21980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,400.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

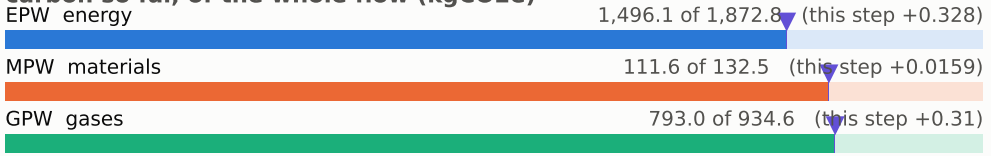

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

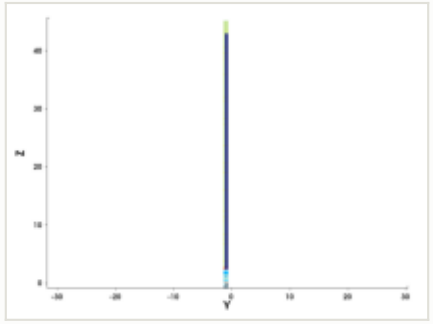

y cut at -1.035 µm

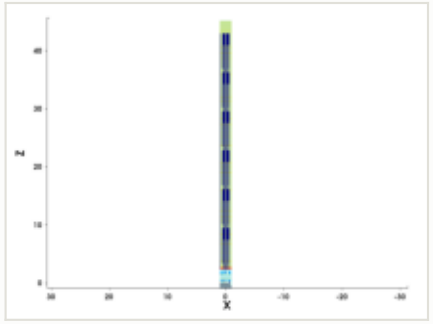

mask for this step

no mask for this step

steps by process area

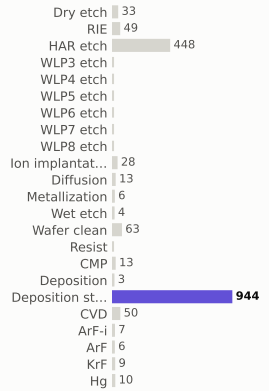

materials deposited (g)

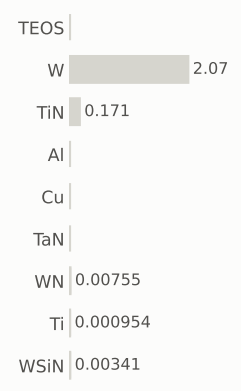

gases emitted (g)

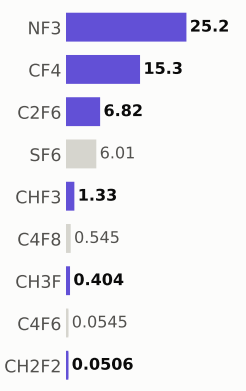

Step #21990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,401.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

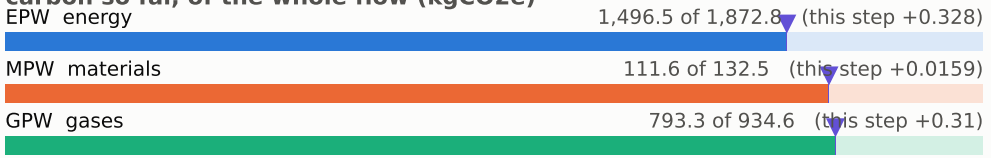

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

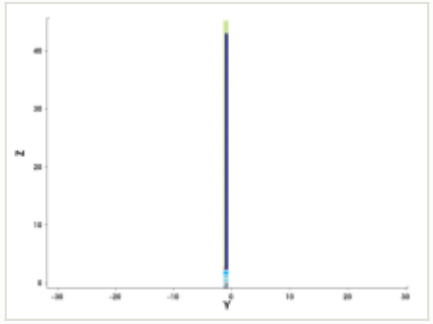

y cut at -1.035 µm

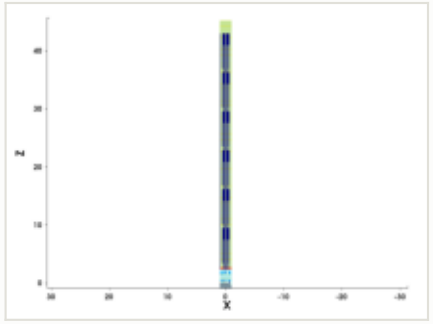

mask for this step

no mask for this step

steps by process area

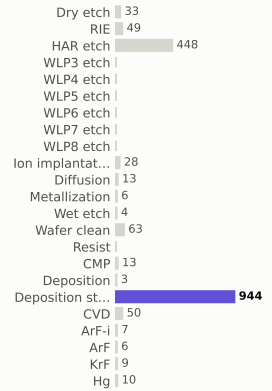

materials deposited (g)

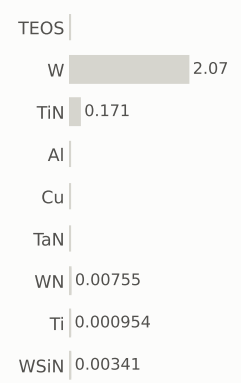

gases emitted (g)

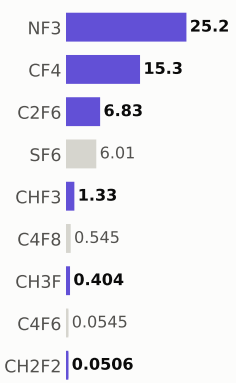

Step #22000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,402.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

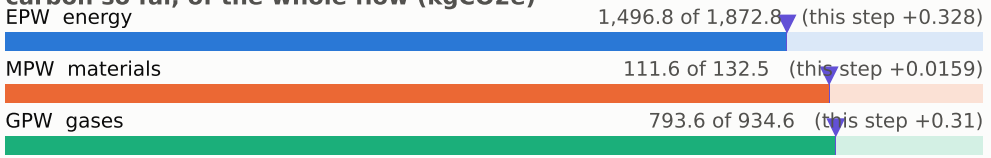

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

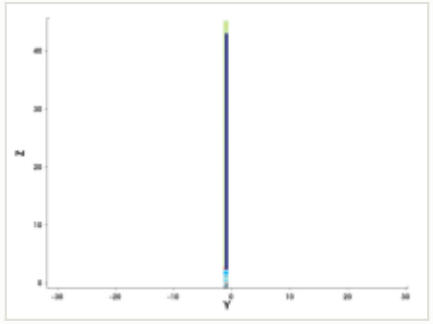

y cut at -1.035 µm

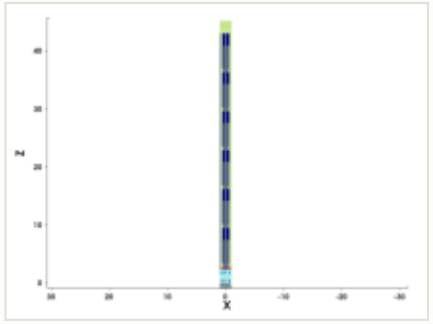

mask for this step

no mask for this step

steps by process area

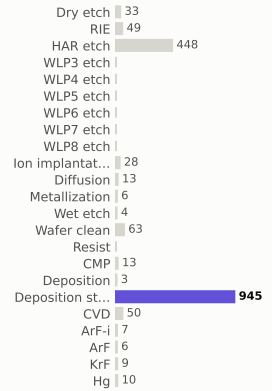

materials deposited (g)

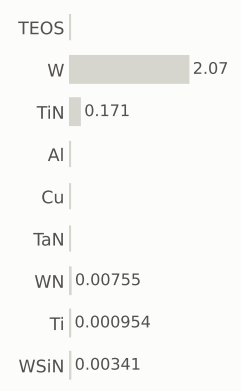

gases emitted (g)

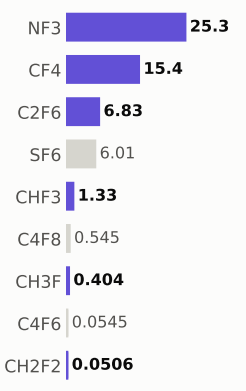

Step #22010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,402.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

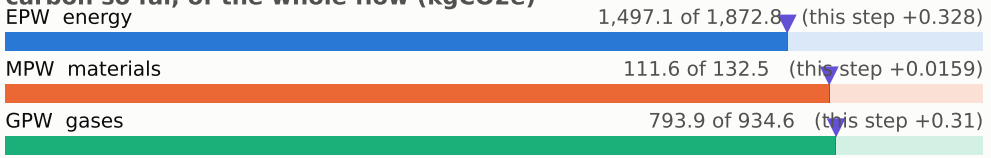

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

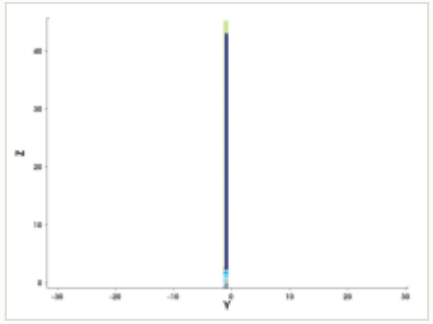

y cut at -1.035 µm

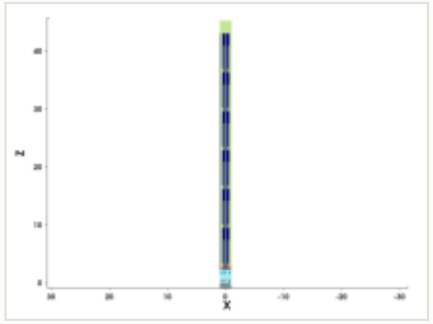

mask for this step

no mask for this step

steps by process area

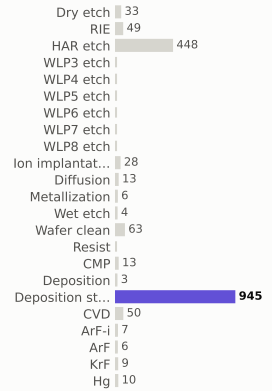

materials deposited (g)

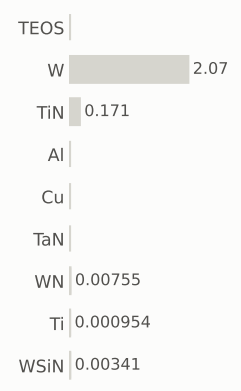

gases emitted (g)

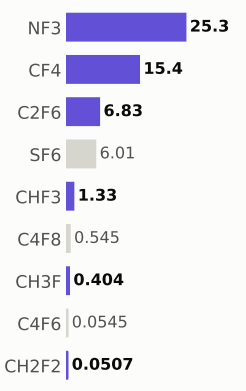

Step #22020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,403.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

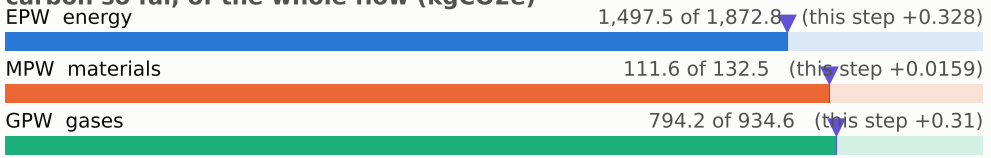

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

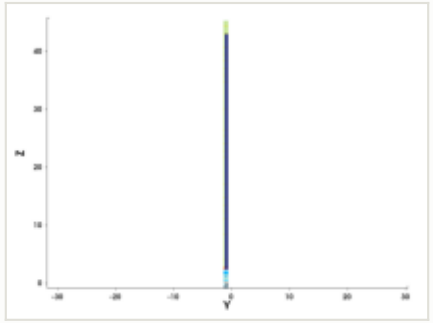

y cut at -1.035 µm

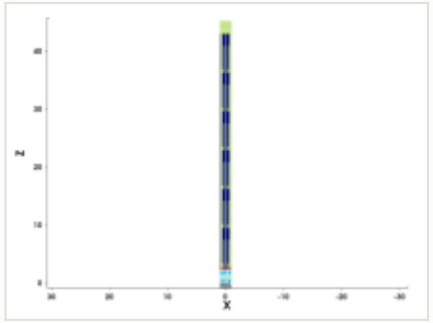

mask for this step

no mask for this step

steps by process area

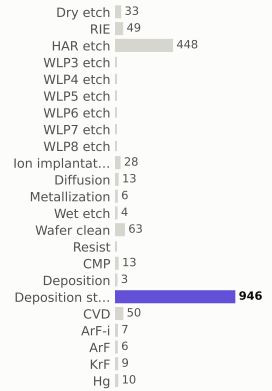

materials deposited (g)

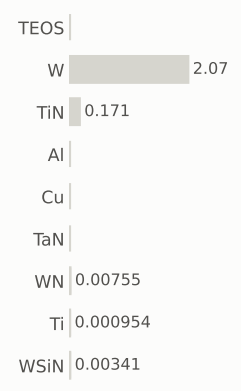

gases emitted (g)

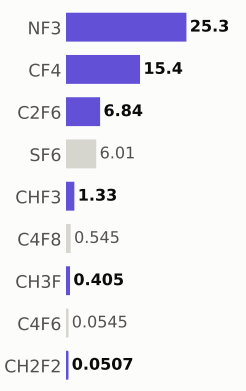

Step #22030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,404.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

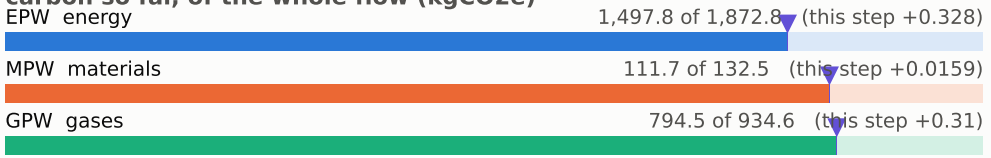

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

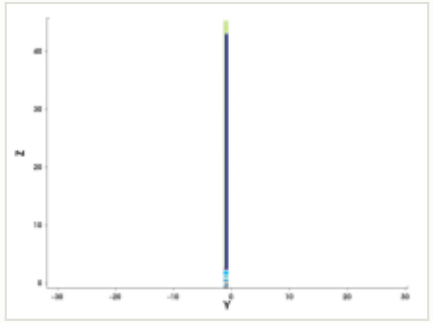

y cut at -1.035 µm

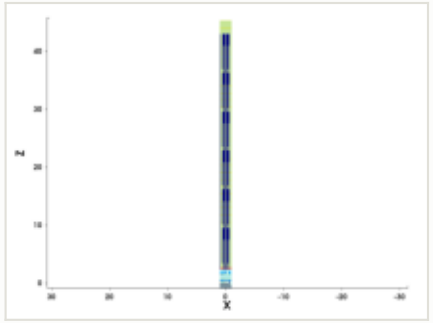

mask for this step

no mask for this step

steps by process area

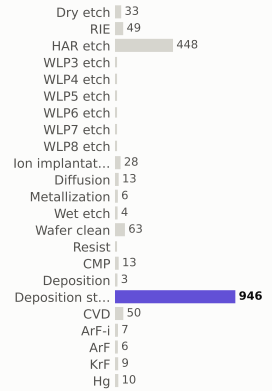

materials deposited (g)

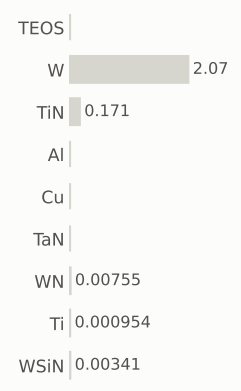

gases emitted (g)

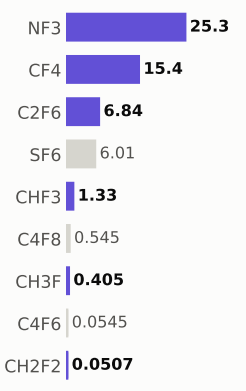

Step #22040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,404.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

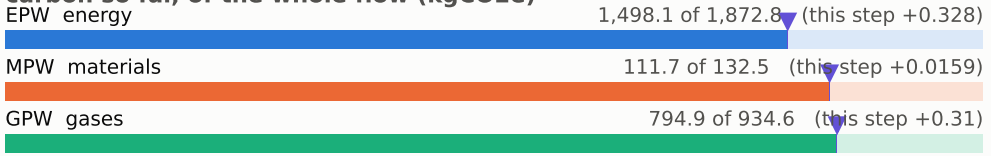

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

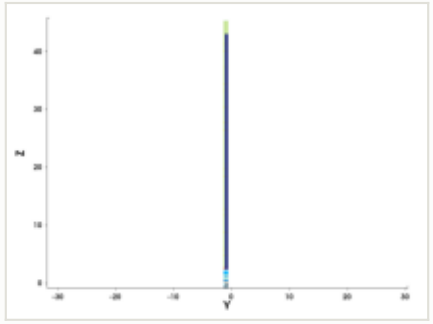

y cut at -1.035 µm

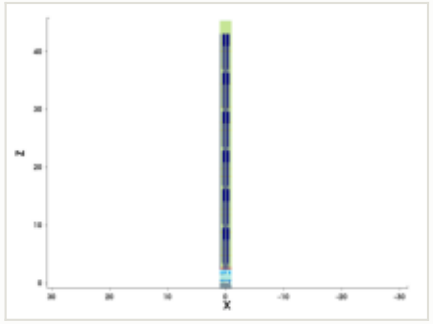

mask for this step

no mask for this step

steps by process area

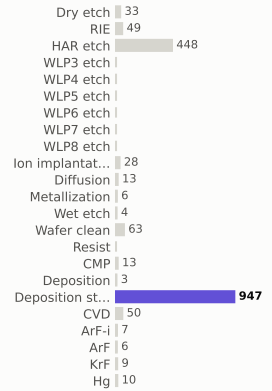

materials deposited (g)

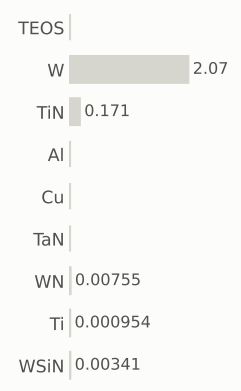

gases emitted (g)

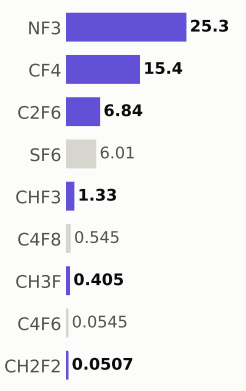

Step #22050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,405.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

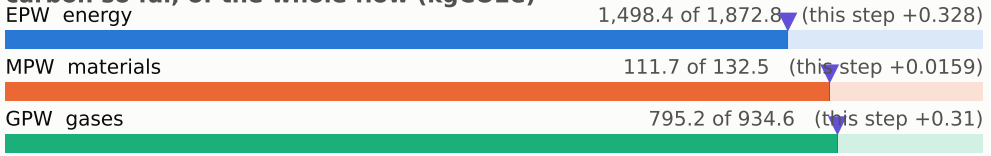

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

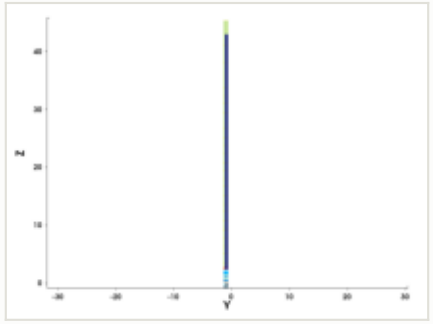

y cut at -1.035 µm

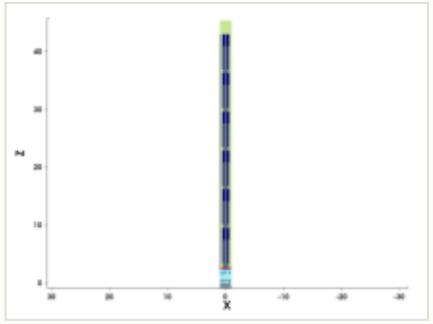

mask for this step

no mask for this step

steps by process area

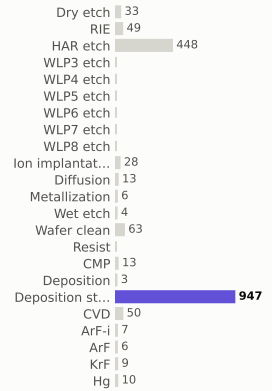

materials deposited (g)

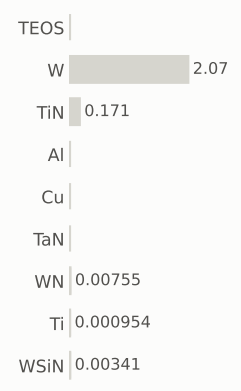

gases emitted (g)

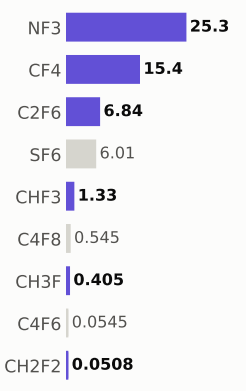

Step #22060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,406.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

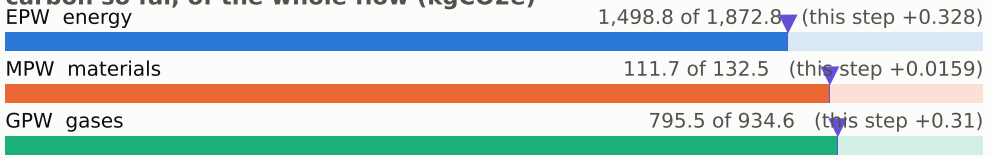

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

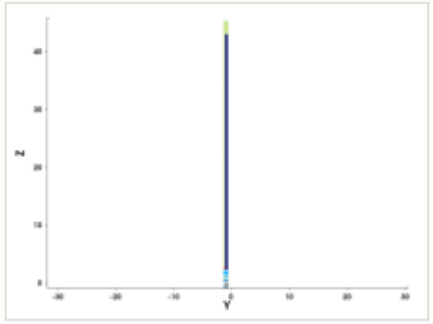

y cut at -1.035 µm

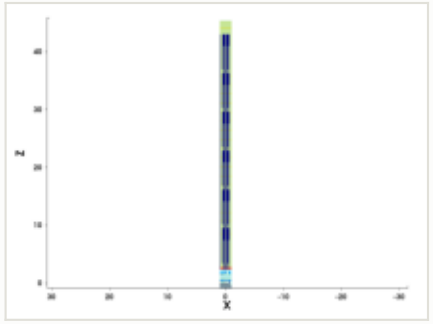

mask for this step

no mask for this step

steps by process area

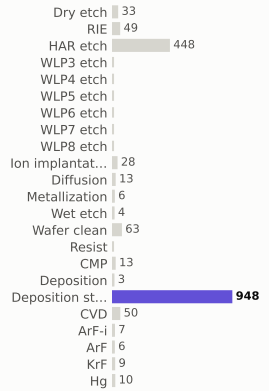

materials deposited (g)

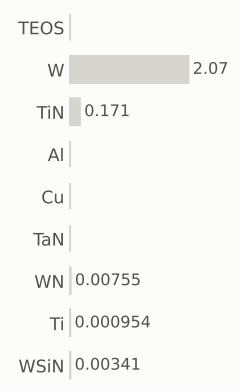

gases emitted (g)

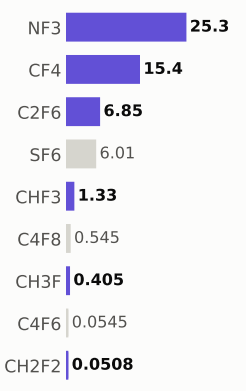

Step #22070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,406.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

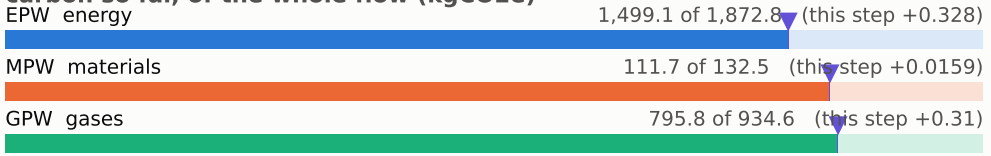

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

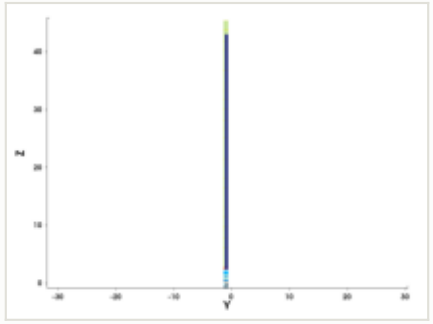

y cut at -1.035 µm

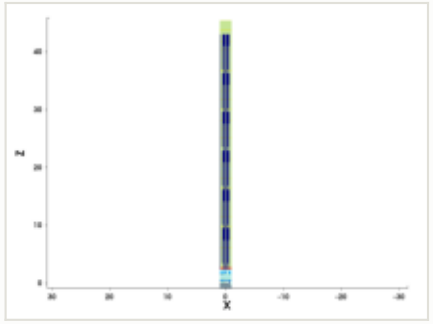

mask for this step

no mask for this step

steps by process area

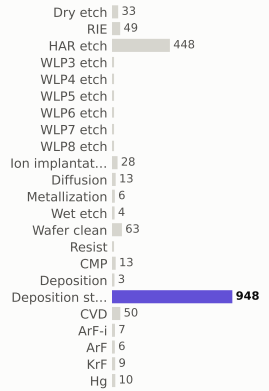

materials deposited (g)

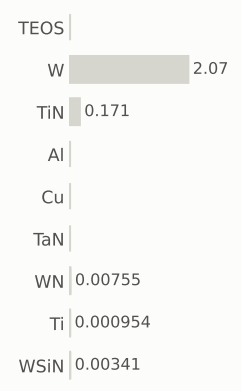

gases emitted (g)

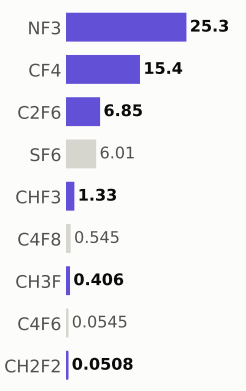

Step #22080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,407.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

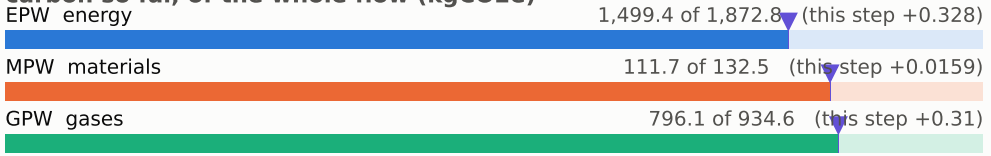

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

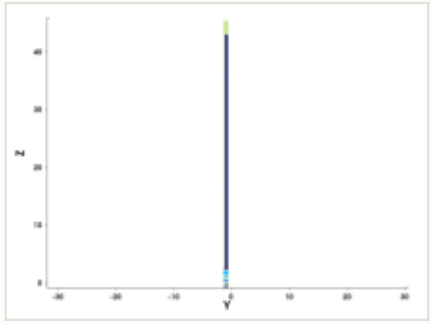

y cut at -1.035 µm

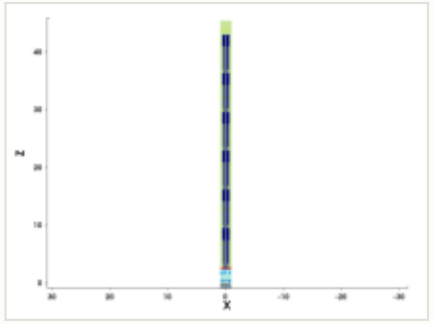

mask for this step

no mask for this step

steps by process area

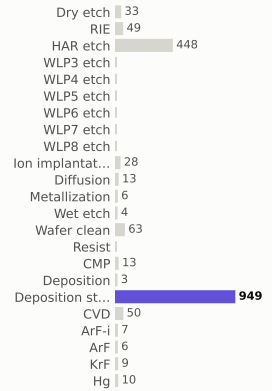

materials deposited (g)

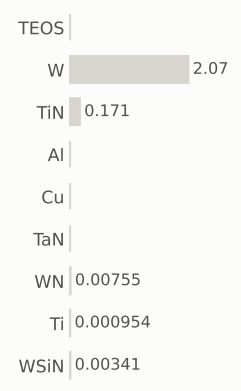

gases emitted (g)

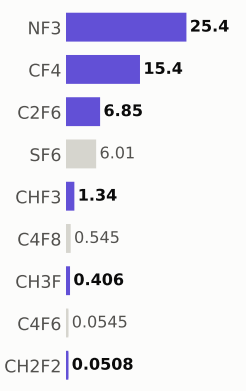

Step #22090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,407.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

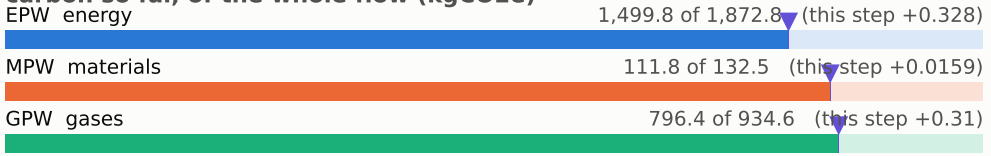

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

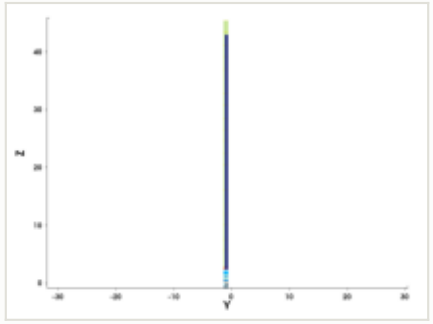

y cut at -1.035 µm

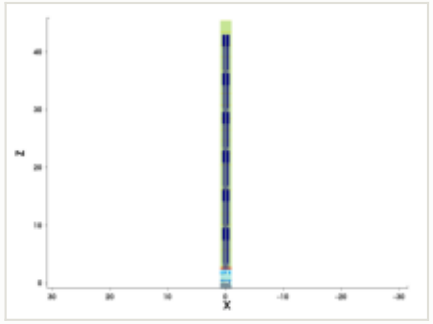

mask for this step

no mask for this step

steps by process area

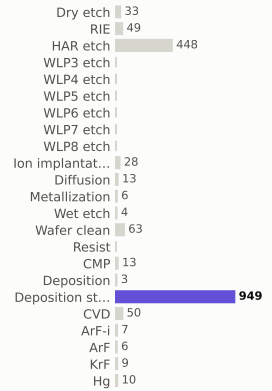

materials deposited (g)

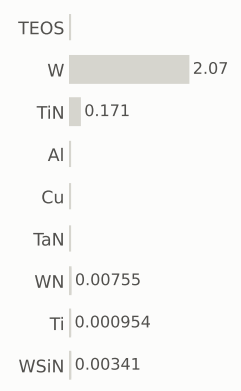

gases emitted (g)



Step #22100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,408.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

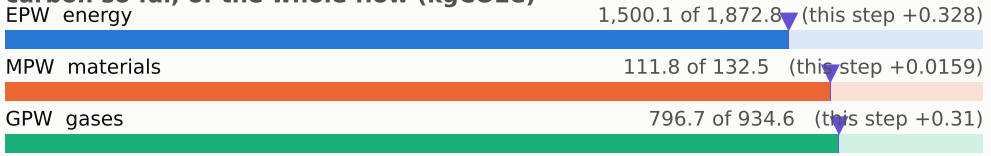

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

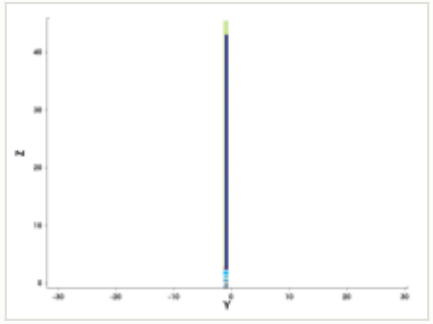

y cut at -1.035 µm

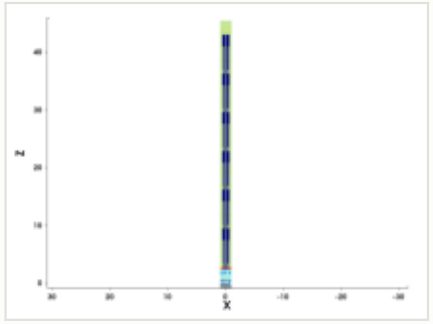

mask for this step

no mask for this step

steps by process area

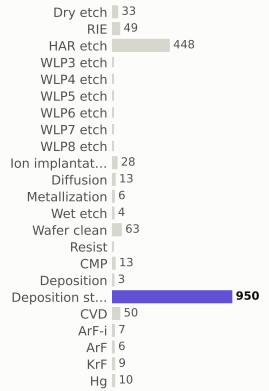

materials deposited (g)

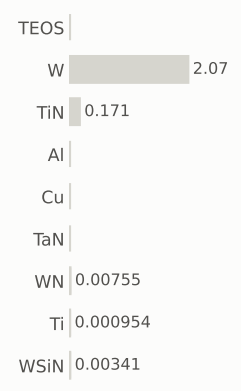

gases emitted (g)

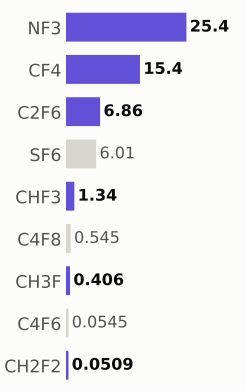

Step #22110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,409.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

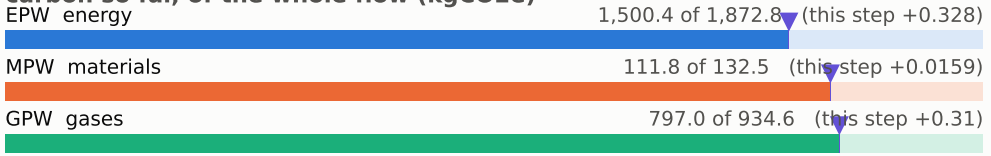

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

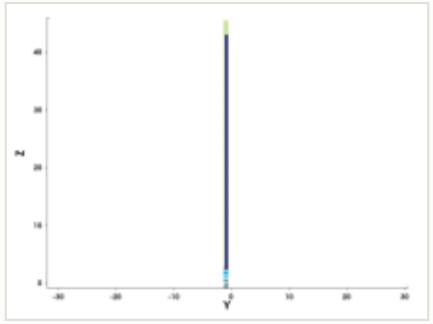

y cut at -1.035 µm

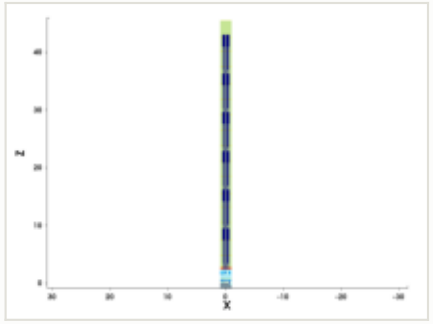

mask for this step

no mask for this step

steps by process area

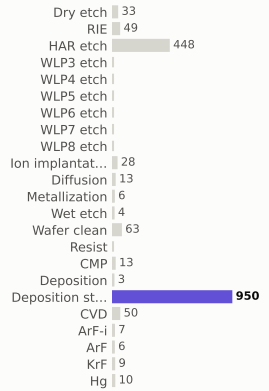

materials deposited (g)

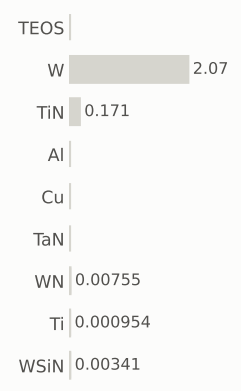

gases emitted (g)

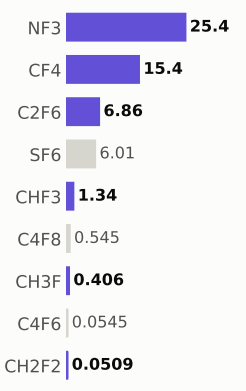

Step #22120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,409.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

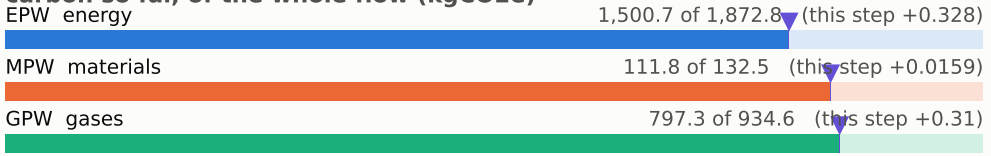

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

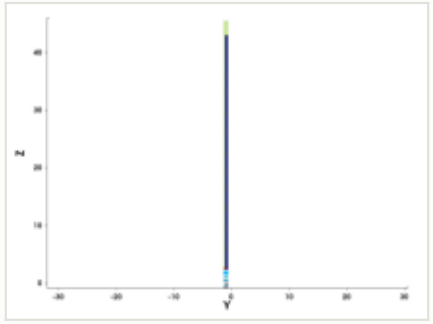

y cut at -1.035 µm

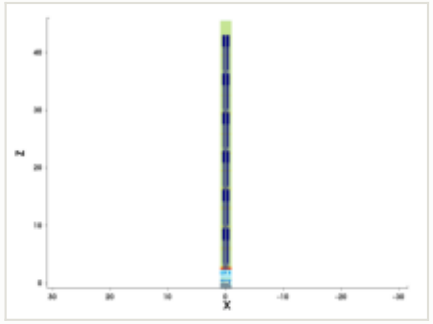

mask for this step

no mask for this step

steps by process area

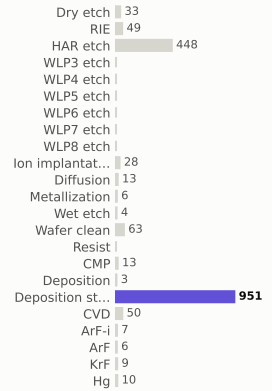

materials deposited (g)

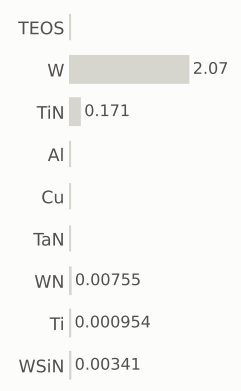

gases emitted (g)

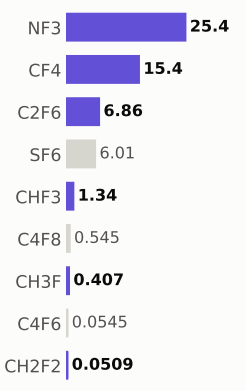

Step #22130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,410.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

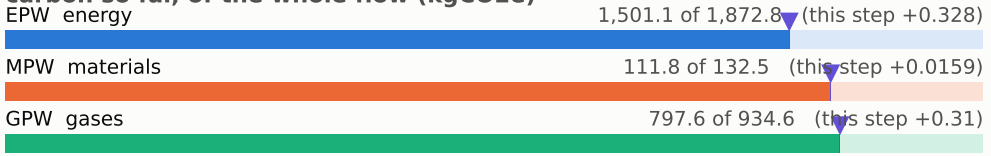

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

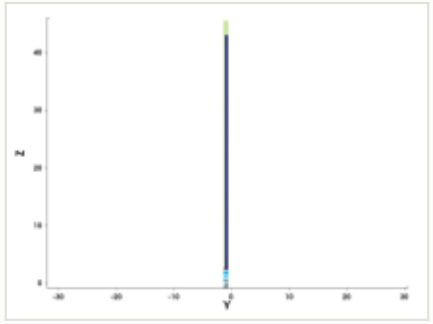

y cut at -1.035 µm

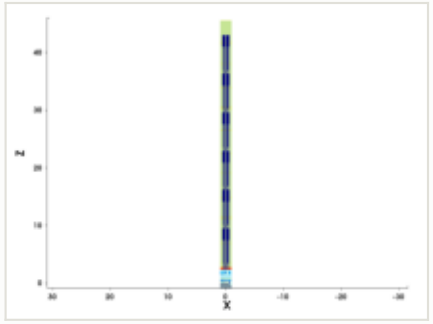

mask for this step

no mask for this step

steps by process area

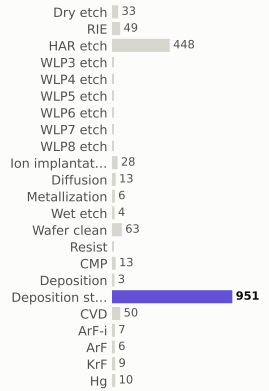

materials deposited (g)

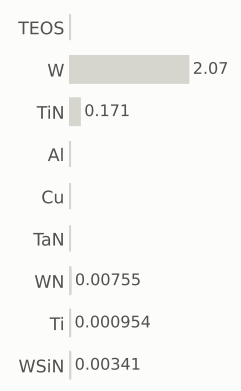

gases emitted (g)

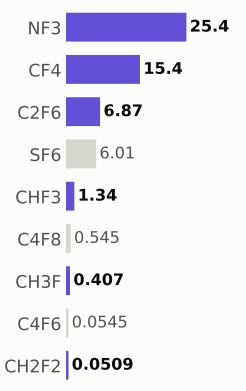

Step #22140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,411.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

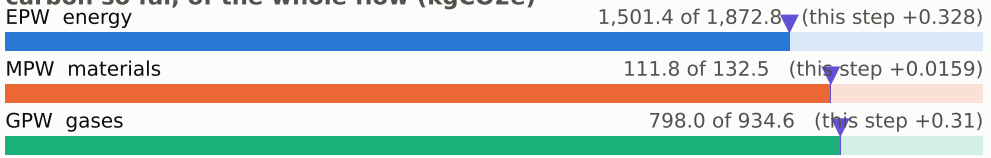

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

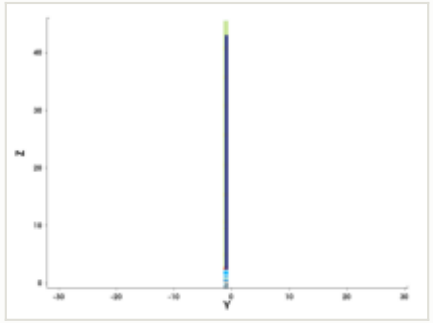

y cut at -1.035 µm

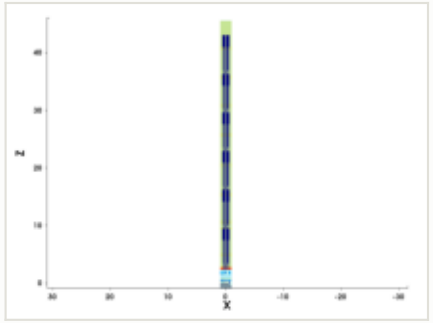

mask for this step

no mask for this step

steps by process area

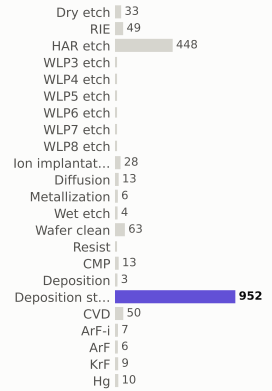

materials deposited (g)

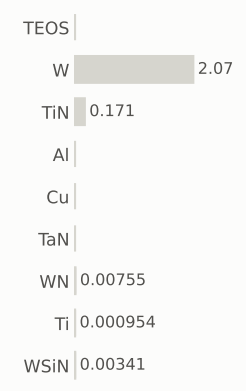

gases emitted (g)

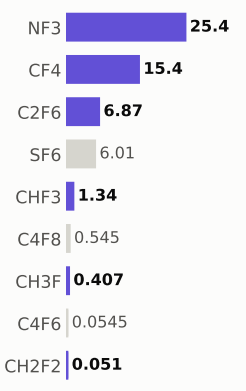

Step #22150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,411.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

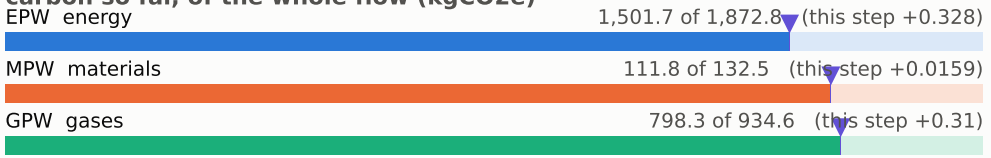

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

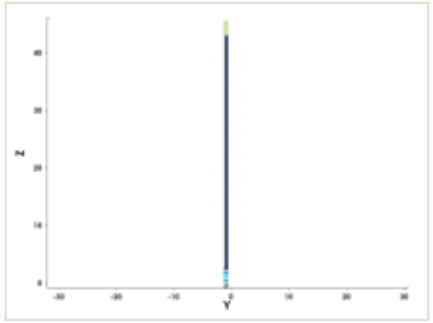

y cut at -1.035 µm

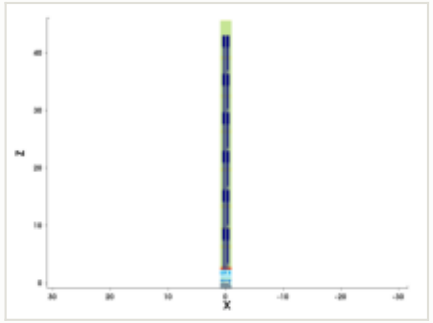

mask for this step

no mask for this step

steps by process area

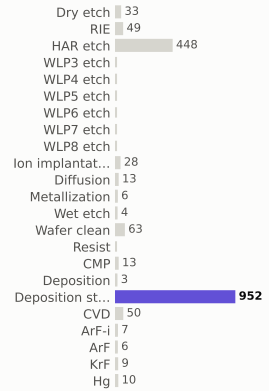

materials deposited (g)

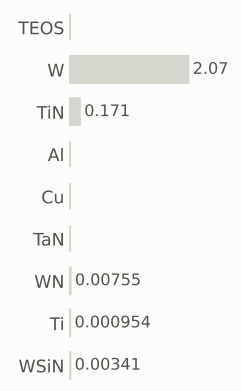

gases emitted (g)

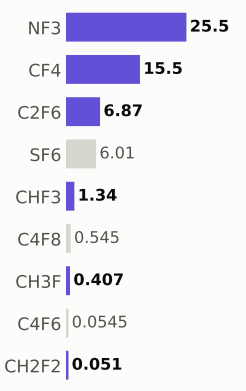

Step #22160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,412.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

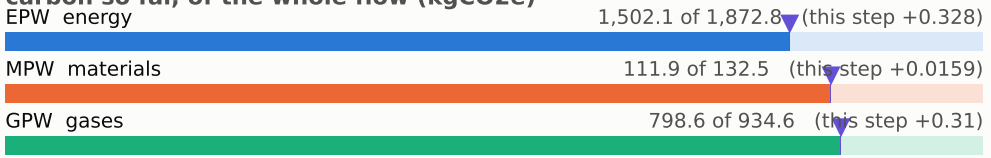

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

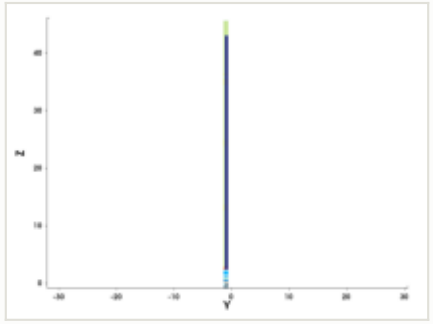

y cut at -1.035 µm

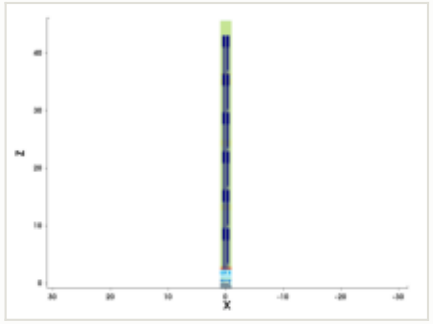

mask for this step

no mask for this step

steps by process area

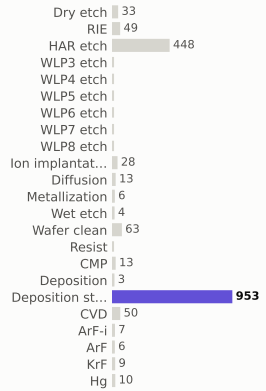

materials deposited (g)

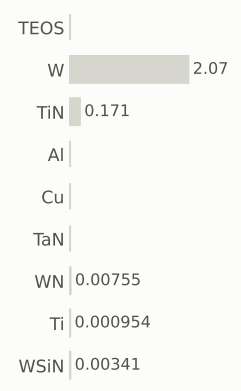

gases emitted (g)

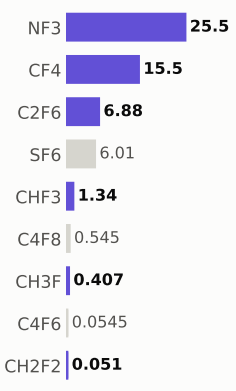

Step #22170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,413.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

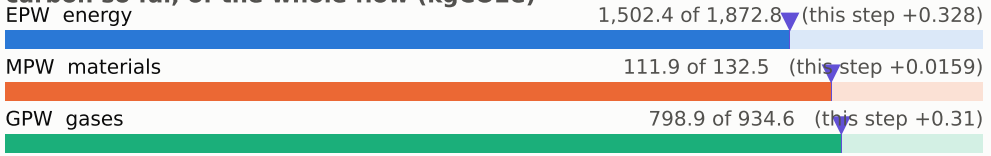

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

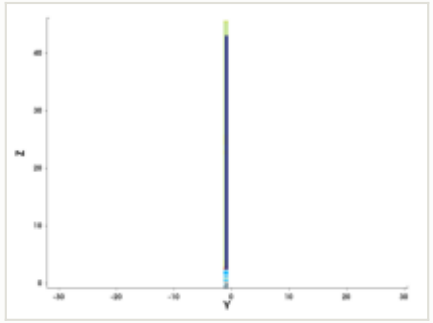

y cut at -1.035 µm

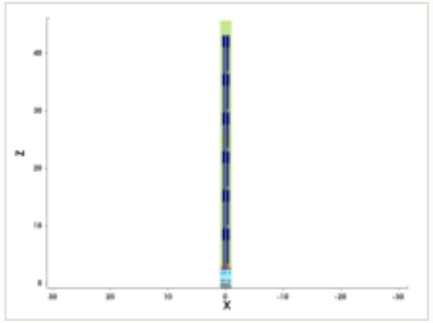

mask for this step

no mask for this step

steps by process area

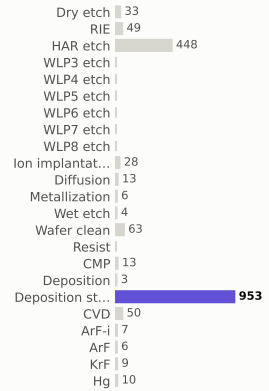

materials deposited (g)

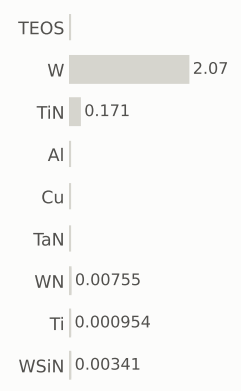

gases emitted (g)

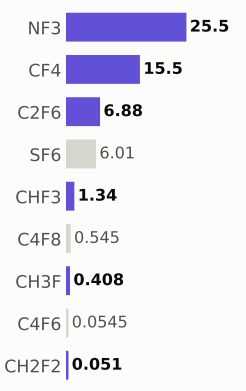

Step #22180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,413.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

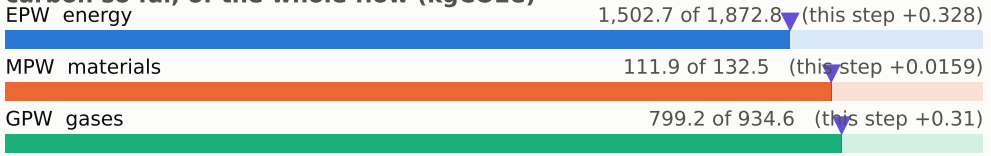

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

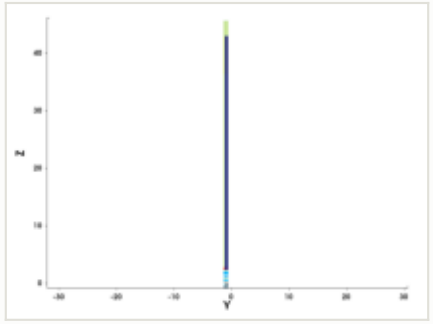

y cut at -1.035 µm

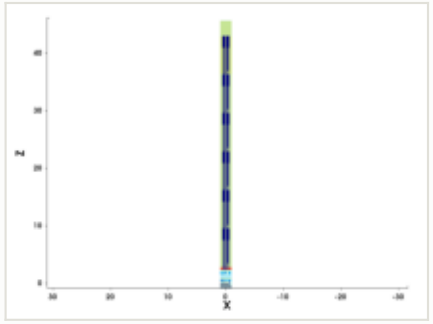

mask for this step

no mask for this step

steps by process area

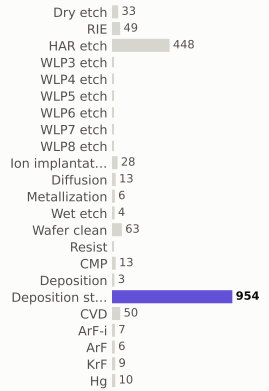

materials deposited (g)

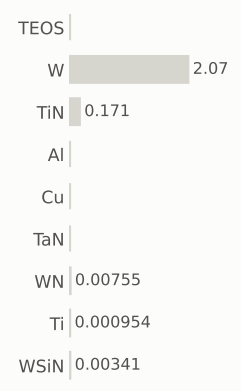

gases emitted (g)

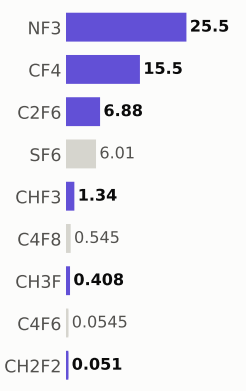

Step #22190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,414.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

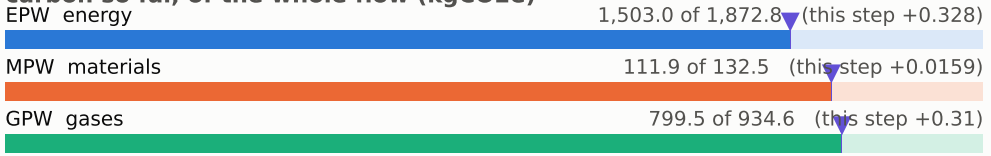

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

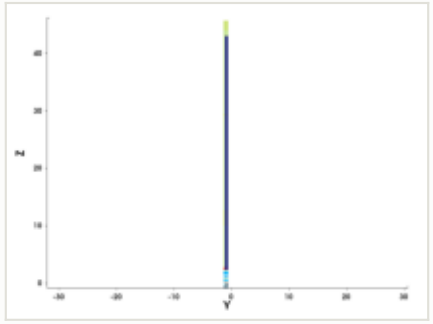

y cut at -1.035 µm

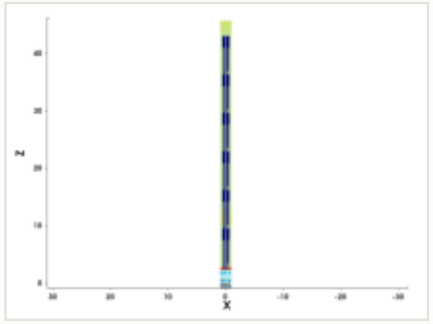

mask for this step

no mask for this step

steps by process area

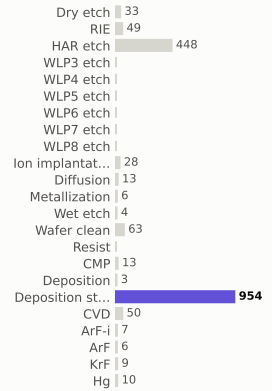

materials deposited (g)

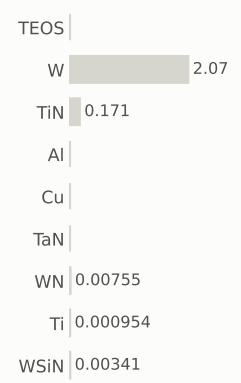

gases emitted (g)

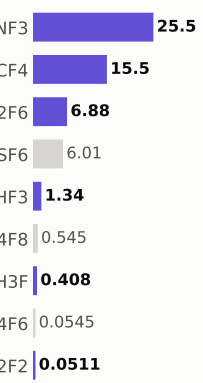

Step #22200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,415.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

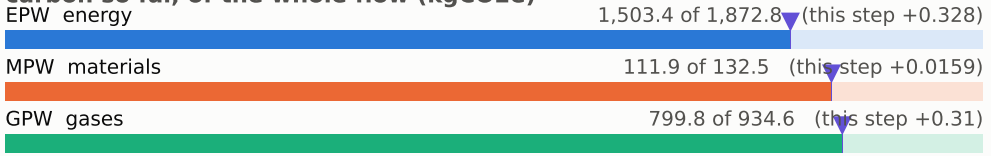

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

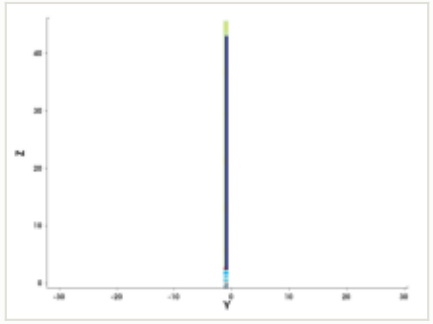

y cut at -1.035 µm

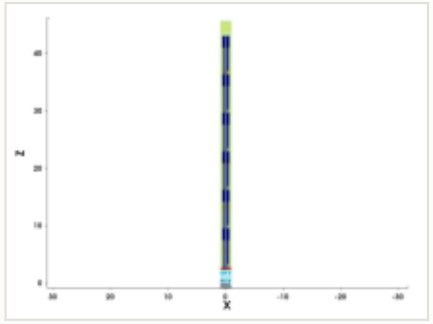

mask for this step

no mask for this step

steps by process area

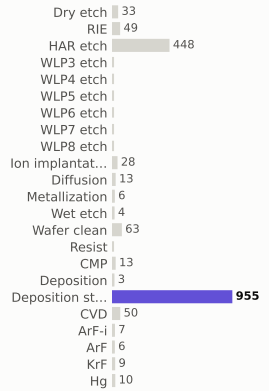

materials deposited (g)

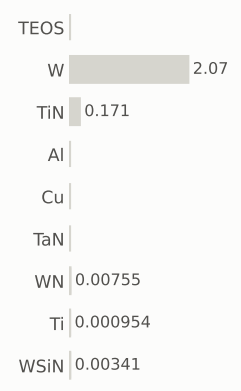

gases emitted (g)

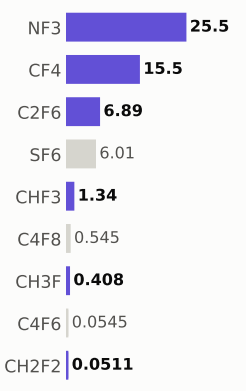

Step #22210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,415.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

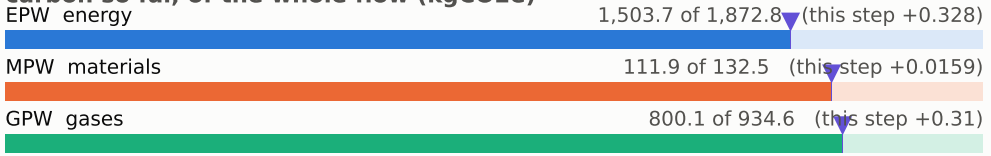

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

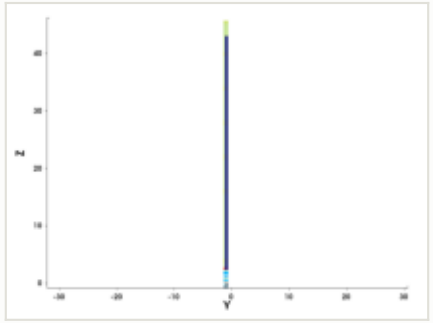

y cut at -1.035 µm

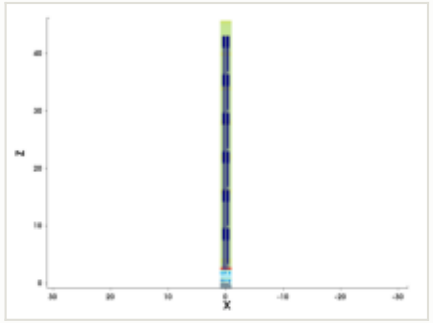

mask for this step

no mask for this step

steps by process area

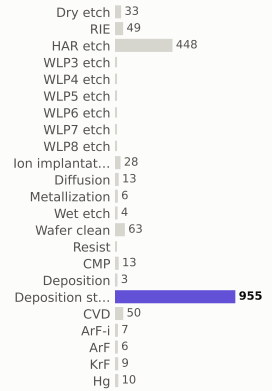

materials deposited (g)

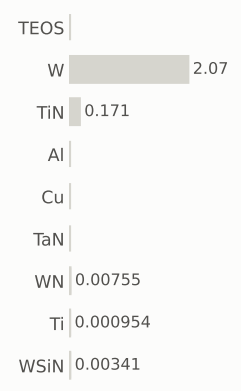

gases emitted (g)

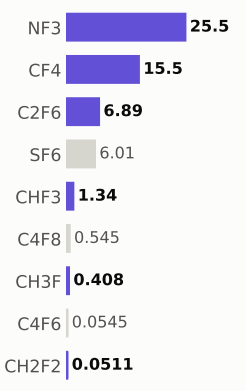

Step #22220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,416.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

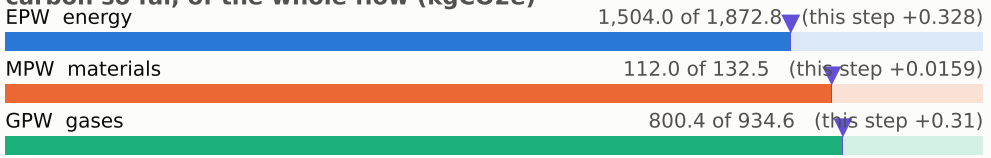

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

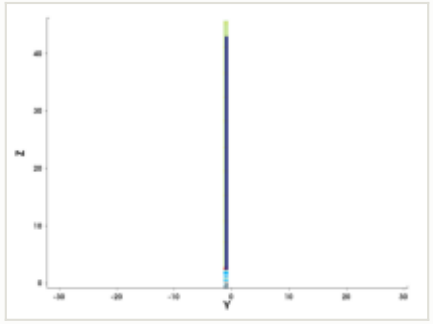

y cut at -1.035 µm

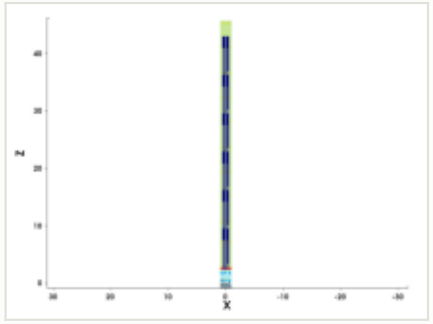

mask for this step

no mask for this step

steps by process area

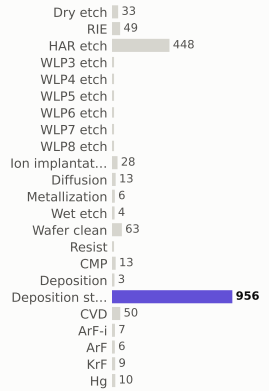

materials deposited (g)

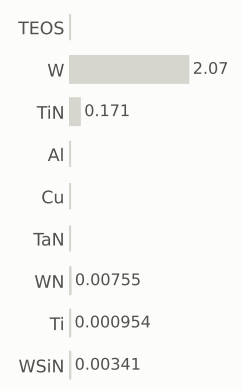

gases emitted (g)



Step #22230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,417.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

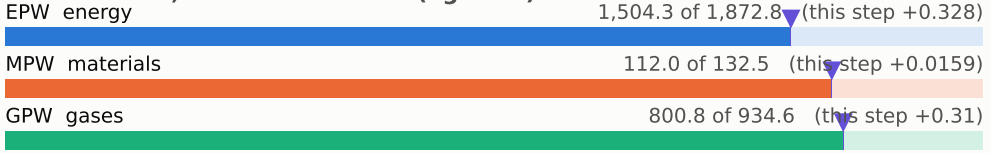

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

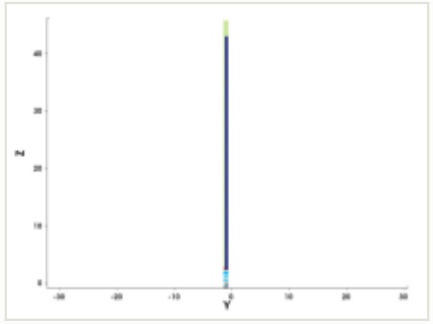

y cut at -1.035 µm

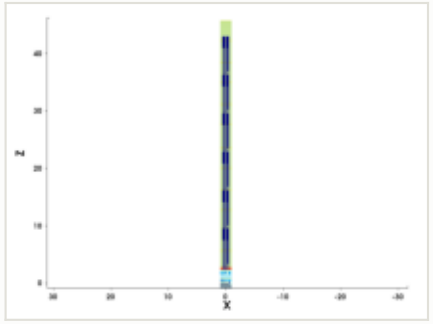

mask for this step

no mask for this step

steps by process area

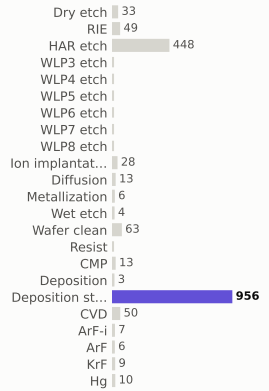

materials deposited (g)

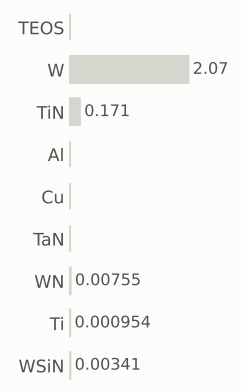

gases emitted (g)



Step #22240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,417.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

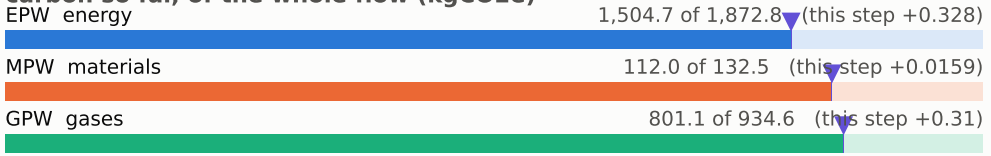

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

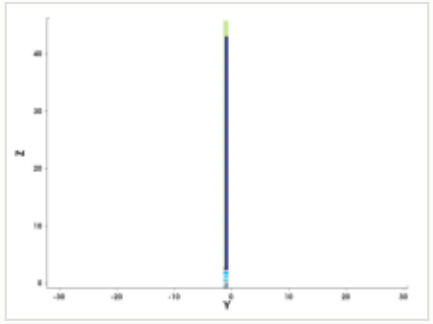

y cut at -1.035 µm

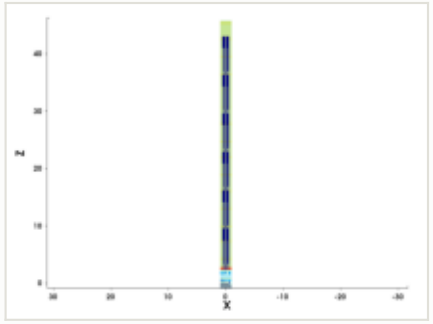

mask for this step

no mask for this step

steps by process area

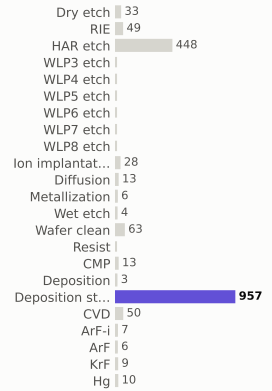

materials deposited (g)

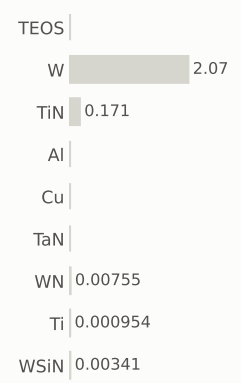

gases emitted (g)

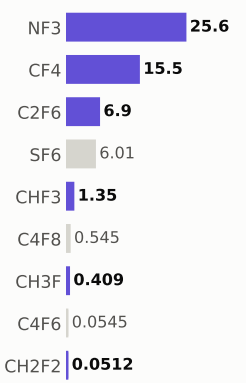

Step #22250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,418.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

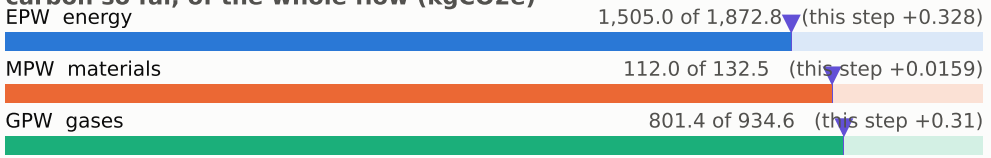

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

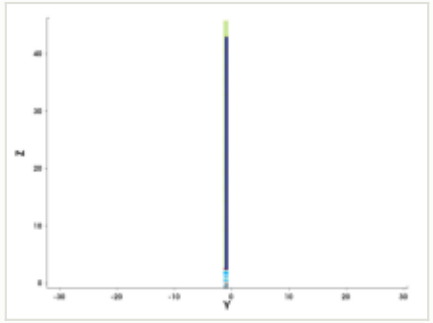

y cut at -1.035 µm

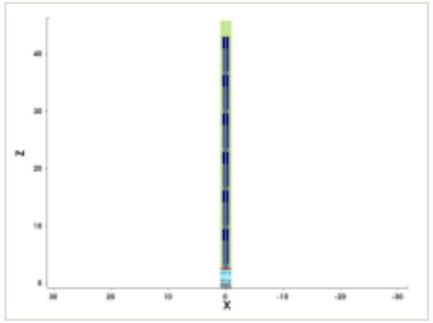

mask for this step

no mask for this step

steps by process area

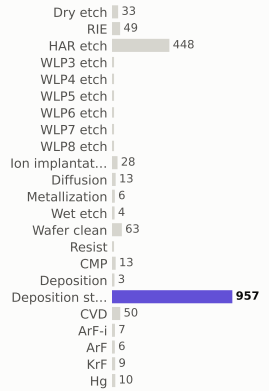

materials deposited (g)

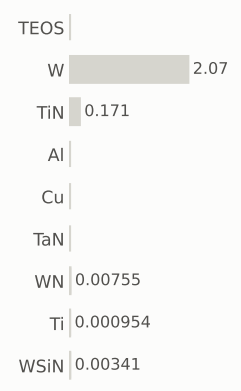

gases emitted (g)

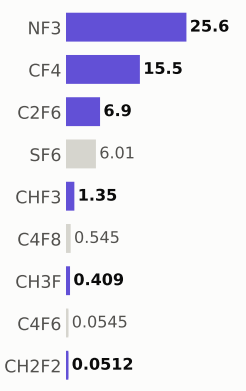

Step #22260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,419.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

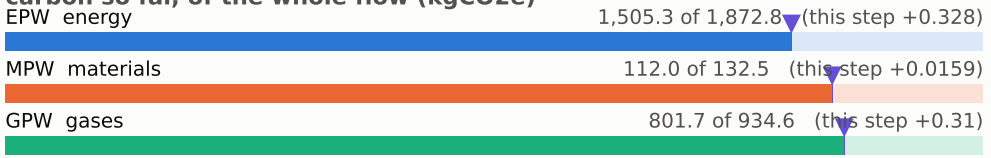

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

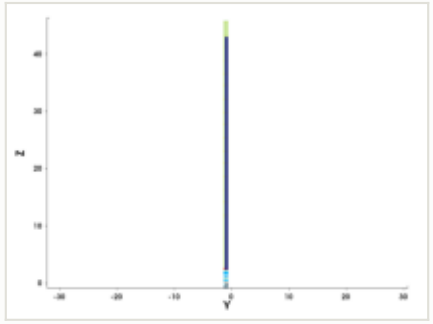

y cut at -1.035 µm

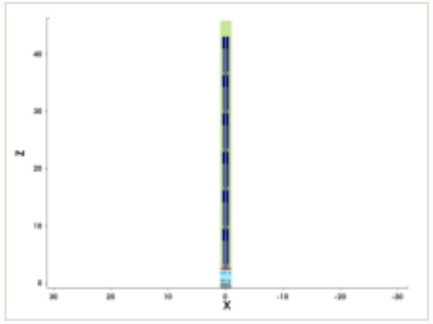

mask for this step

no mask for this step

steps by process area

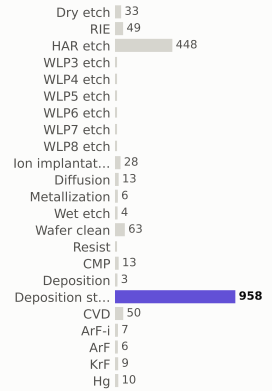

materials deposited (g)

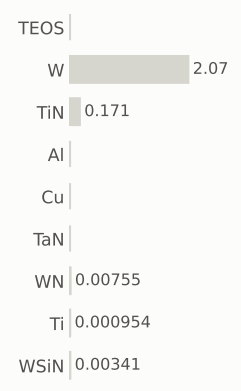

gases emitted (g)

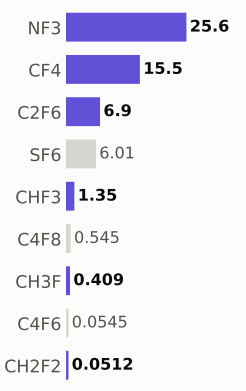

Step #22270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,419.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

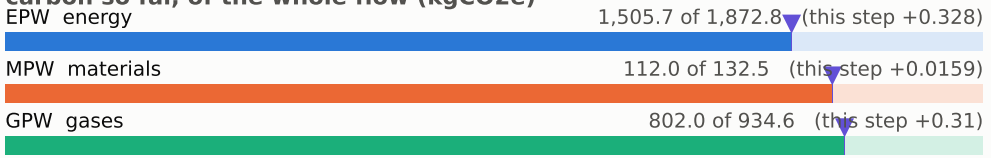

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

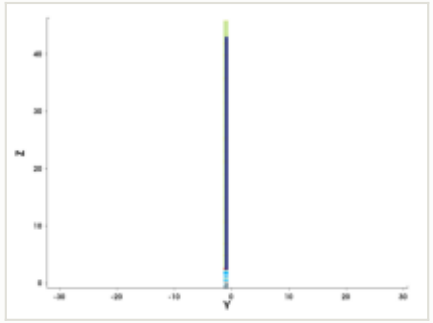

y cut at -1.035 µm

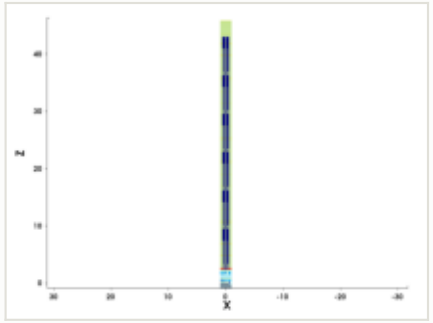

mask for this step

no mask for this step

steps by process area

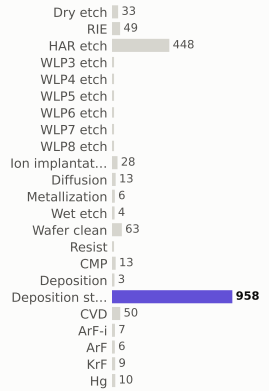

materials deposited (g)

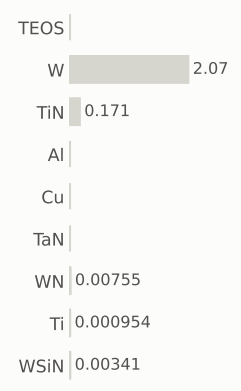

gases emitted (g)

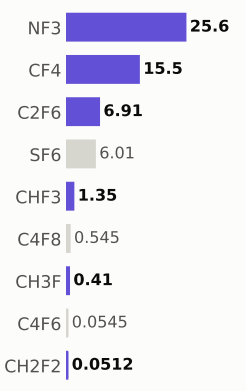

Step #22280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,420.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

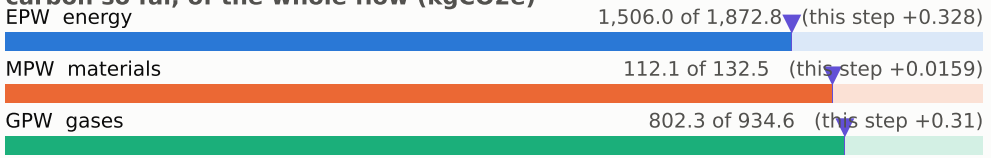

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

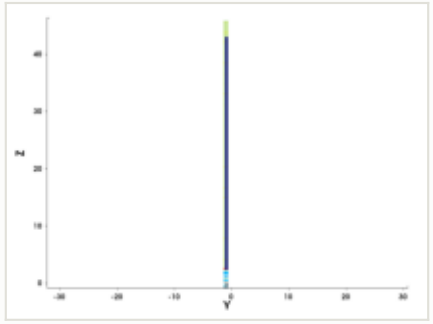

y cut at -1.035 µm

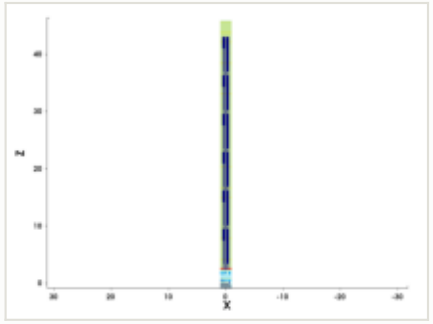

mask for this step

no mask for this step

steps by process area

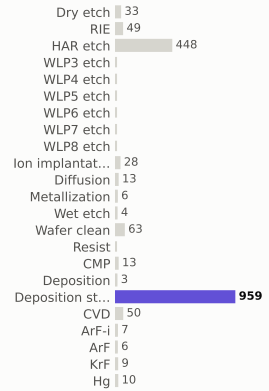

materials deposited (g)

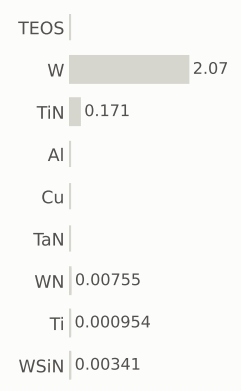

gases emitted (g)

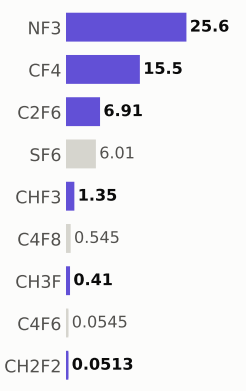

Step #22290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,421.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

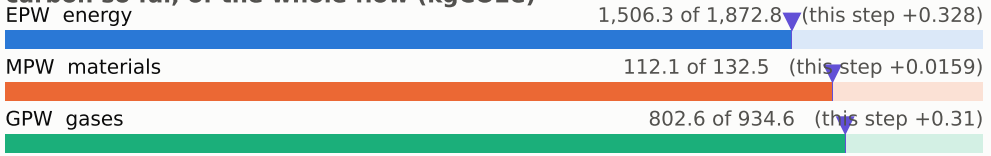

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

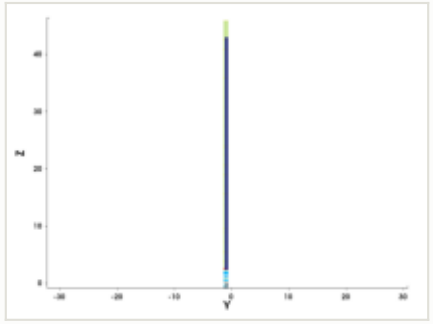

y cut at -1.035 µm

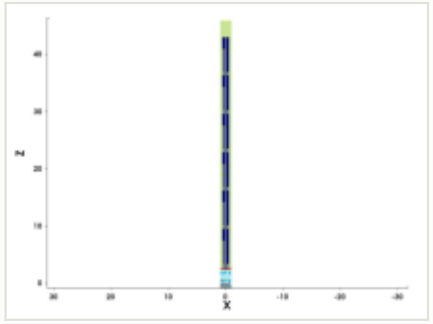

mask for this step

no mask for this step

steps by process area

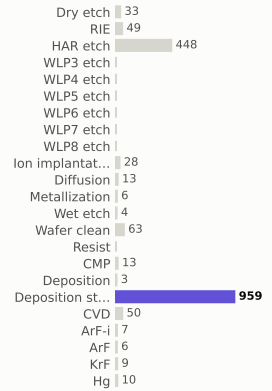

materials deposited (g)

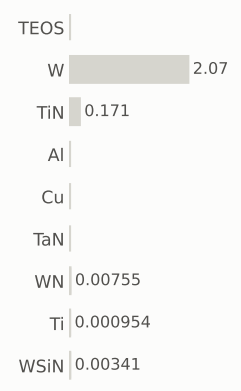

gases emitted (g)

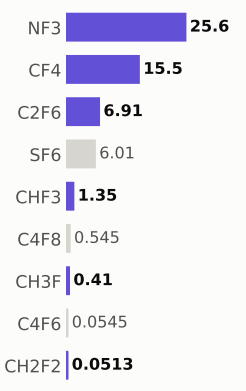

Step #22300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,421.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

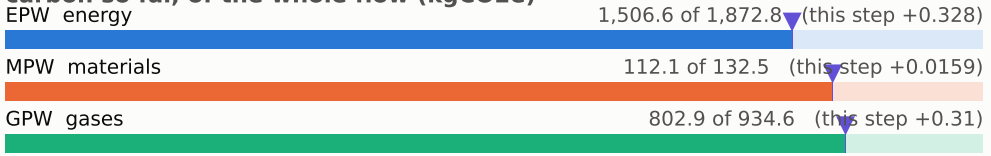

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

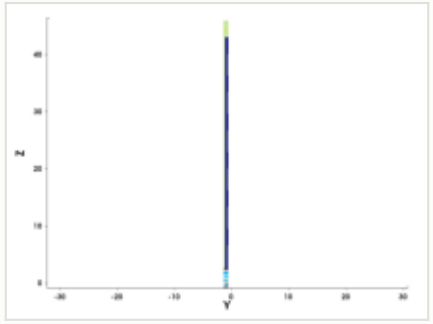

y cut at -1.035 µm

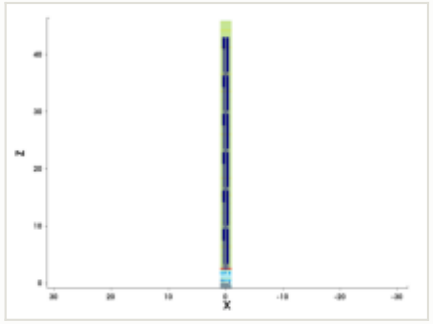

mask for this step

no mask for this step

steps by process area

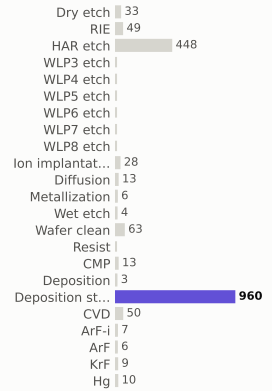

materials deposited (g)

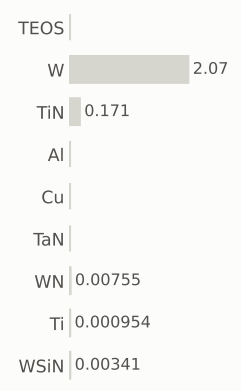

gases emitted (g)

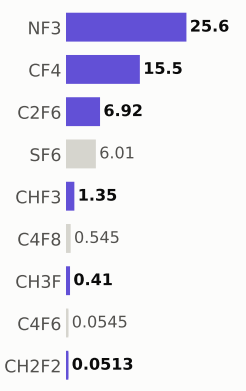

Step #22310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,422.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

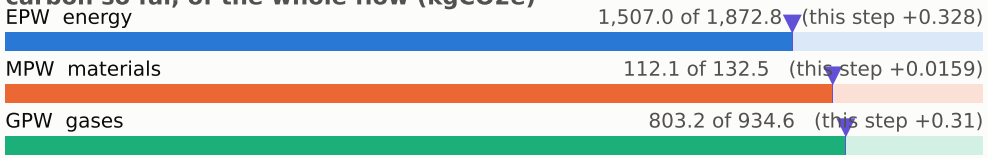

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

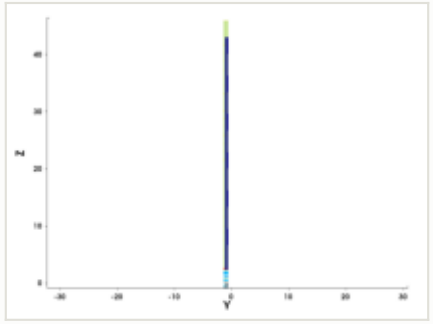

y cut at -1.035 µm

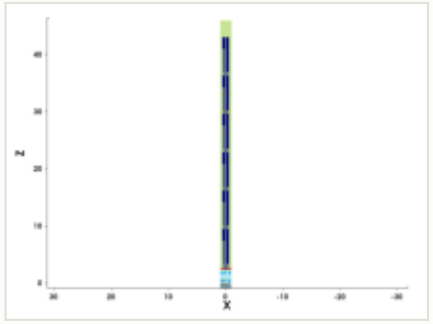

mask for this step

no mask for this step

steps by process area

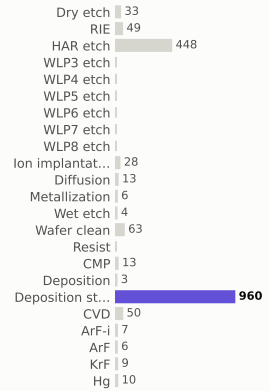

materials deposited (g)

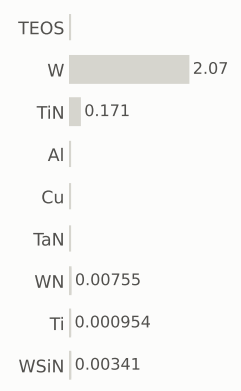

gases emitted (g)

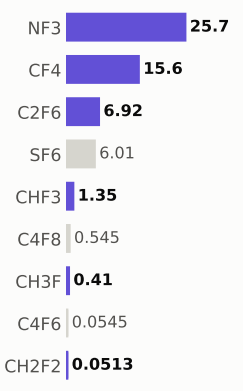

Step #22320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,423.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

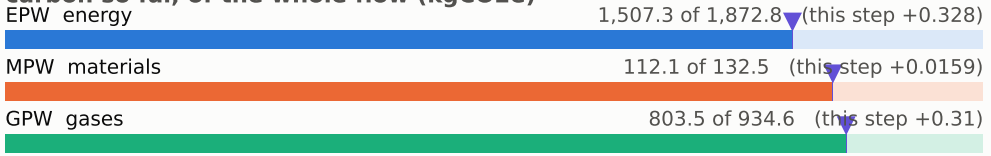

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

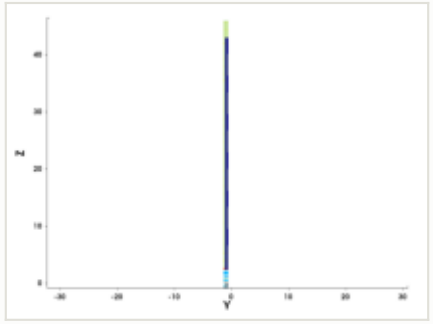

y cut at -1.035 µm

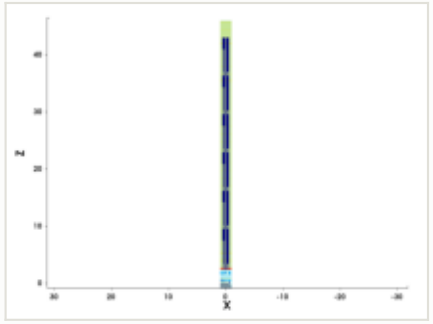

mask for this step

no mask for this step

steps by process area

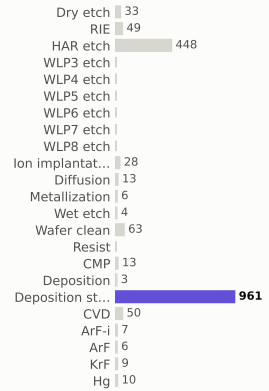

materials deposited (g)

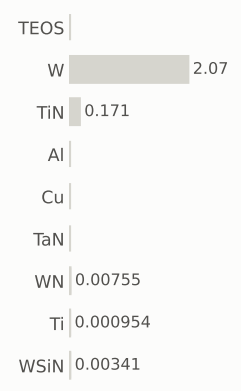

gases emitted (g)

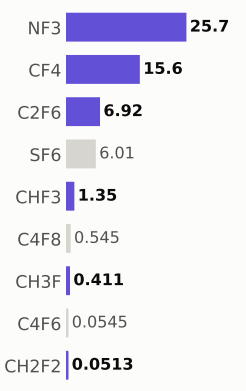

Step #22330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,423.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

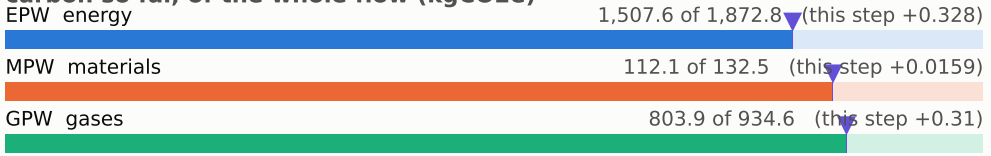

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

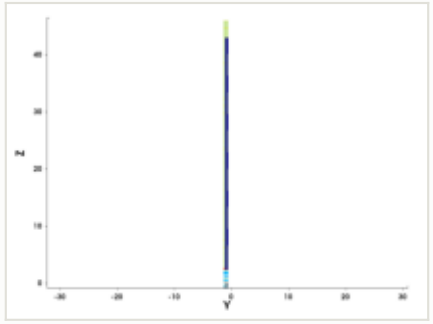

y cut at -1.035 µm

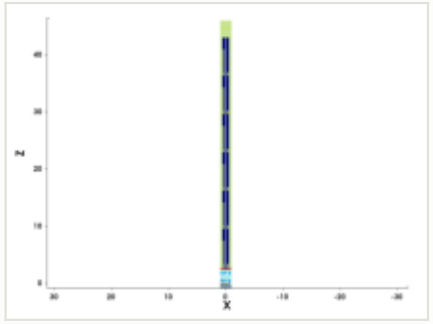

mask for this step

no mask for this step

steps by process area

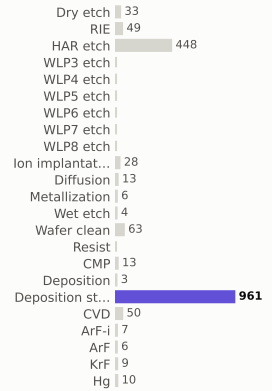

materials deposited (g)

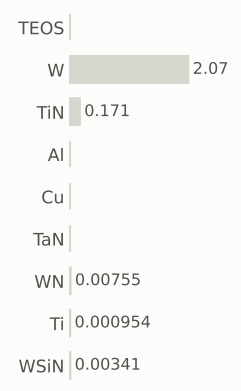

gases emitted (g)

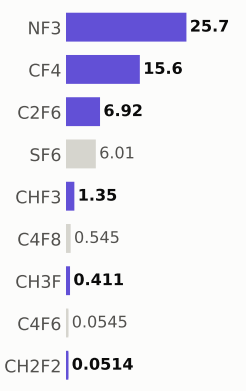

Step #22340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,424.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

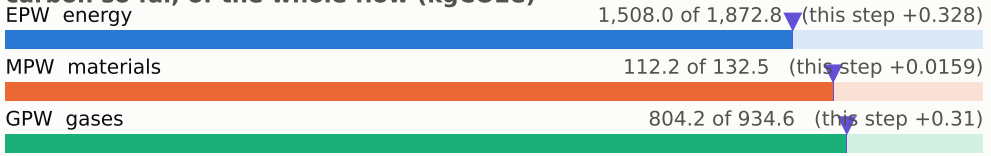

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

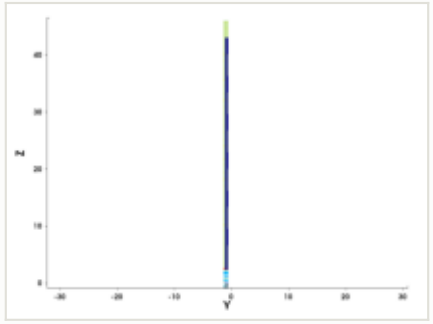

y cut at -1.035 µm

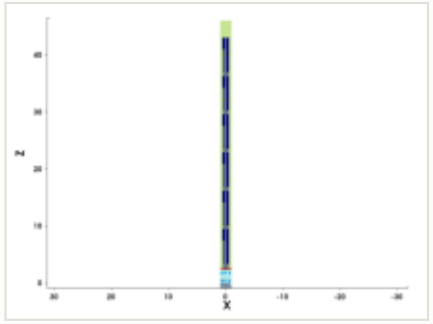

mask for this step

no mask for this step

steps by process area

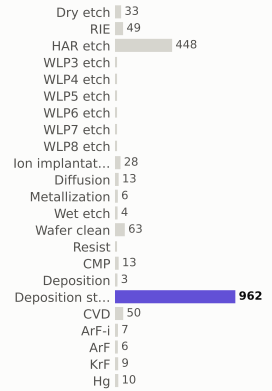

materials deposited (g)

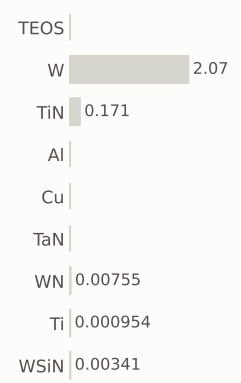

gases emitted (g)

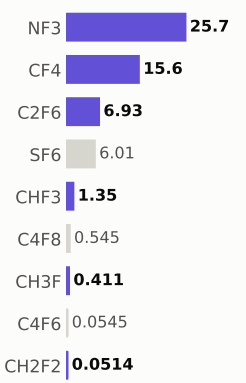

Step #22350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,424.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

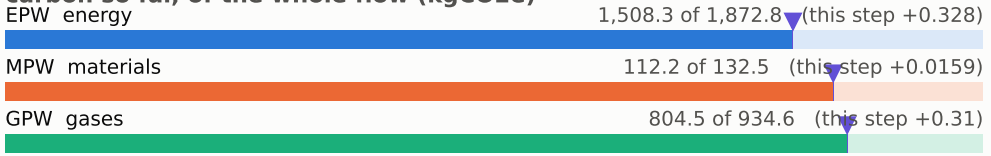

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

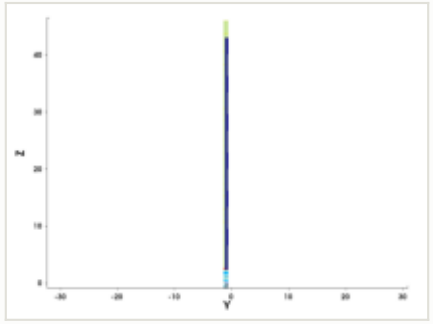

y cut at -1.035 µm

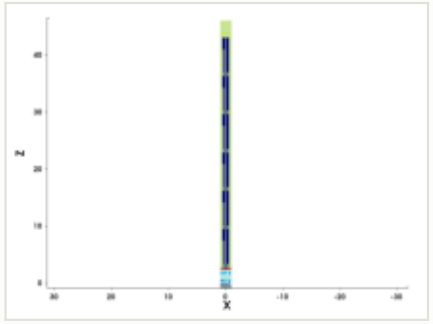

mask for this step

no mask for this step

steps by process area

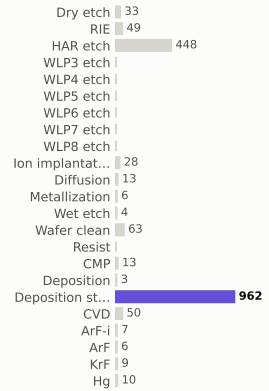

materials deposited (g)

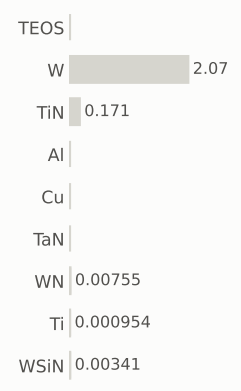

gases emitted (g)

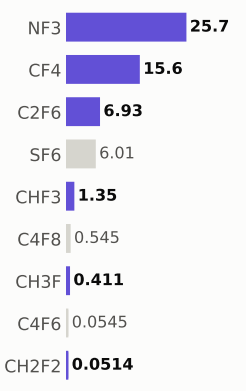

Step #22360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,425.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

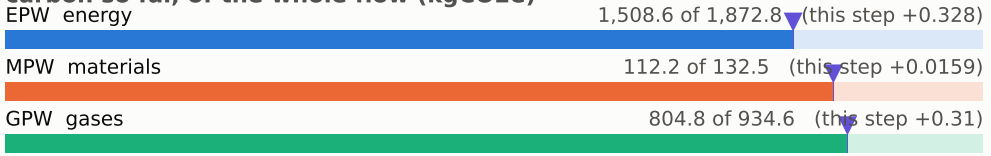

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

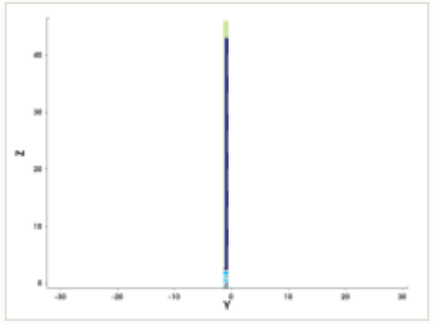

y cut at -1.035 µm

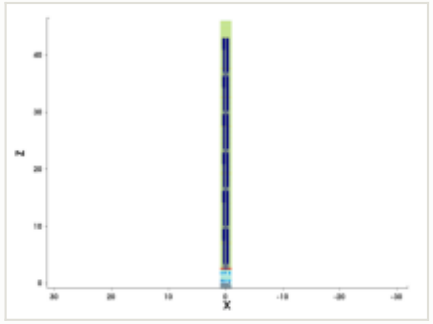

mask for this step

no mask for this step

steps by process area

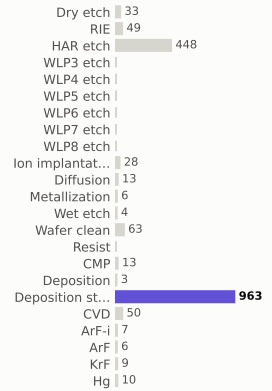

materials deposited (g)

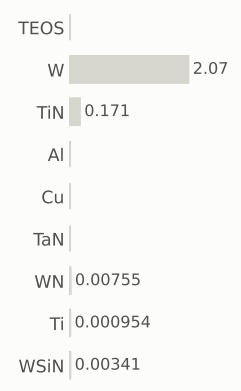

gases emitted (g)

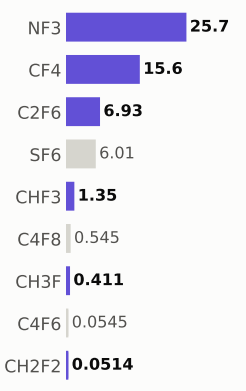

Step #22370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,426.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

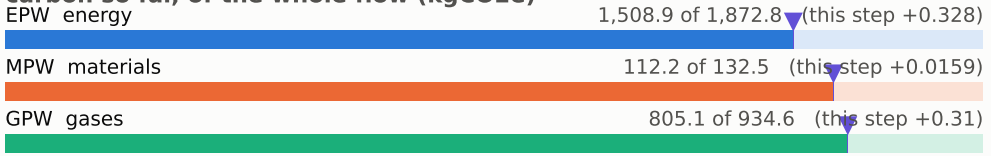

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

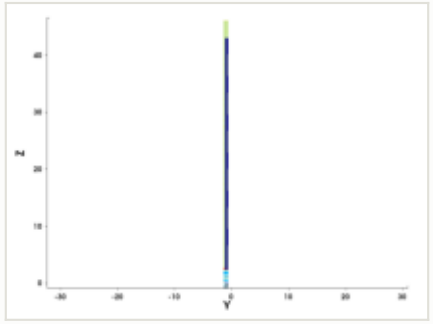

y cut at -1.035 µm

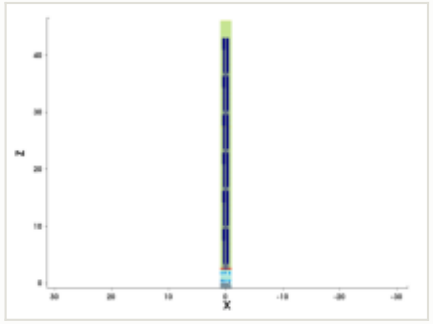

mask for this step

no mask for this step

steps by process area

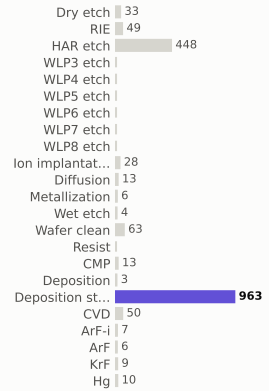

materials deposited (g)

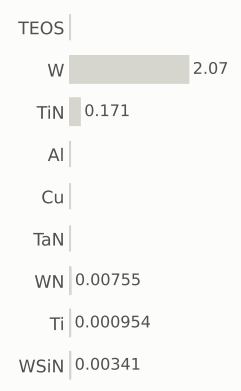

gases emitted (g)

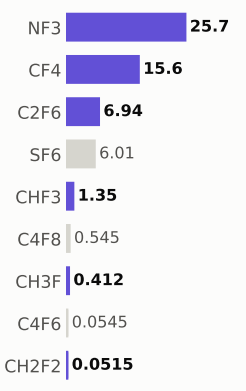

Step #22380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,426.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

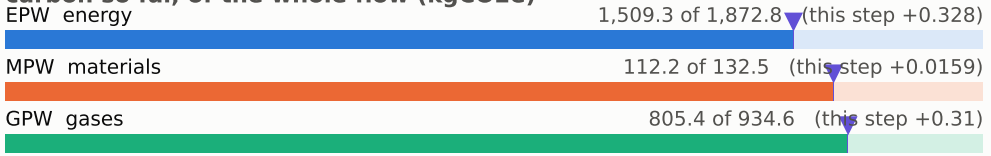

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

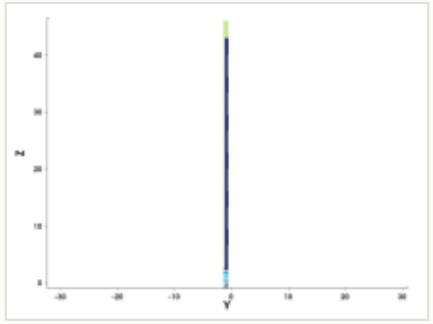

y cut at -1.035 µm

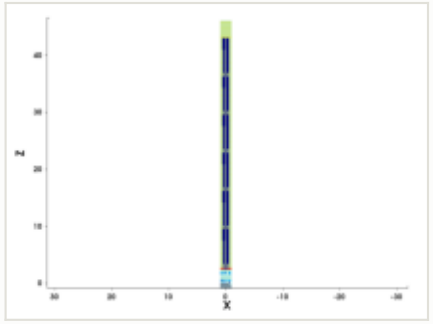

mask for this step

no mask for this step

steps by process area

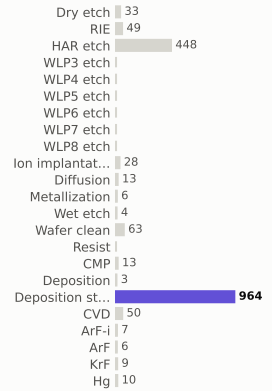

materials deposited (g)

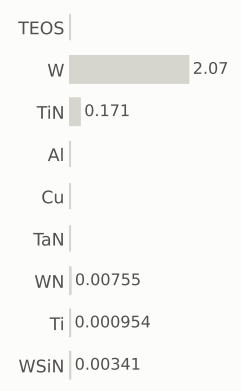

gases emitted (g)

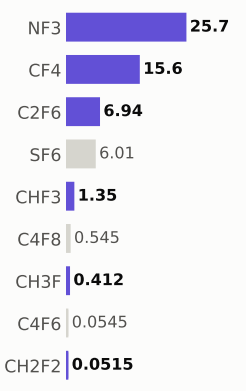

Step #22390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,427.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

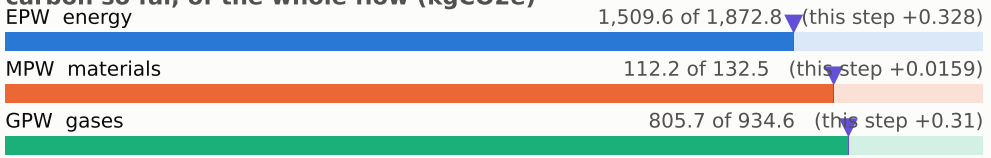

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

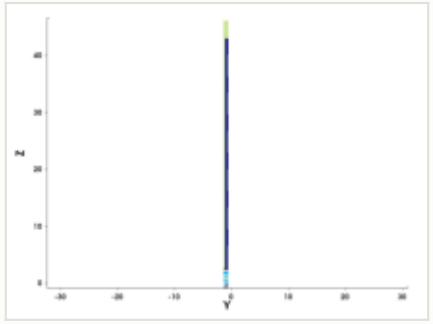

y cut at -1.035 µm

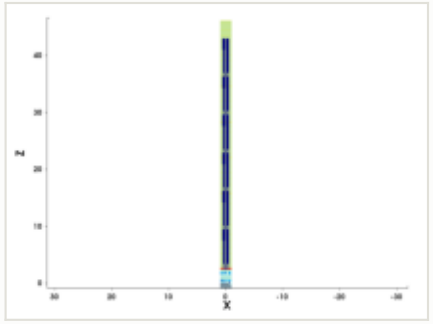

mask for this step

no mask for this step

steps by process area

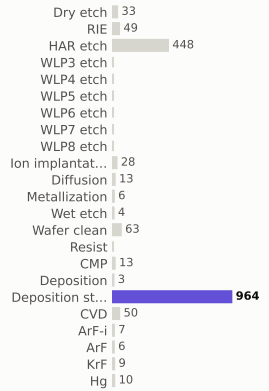

materials deposited (g)

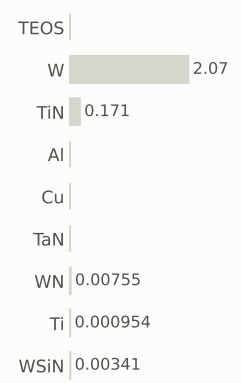

gases emitted (g)

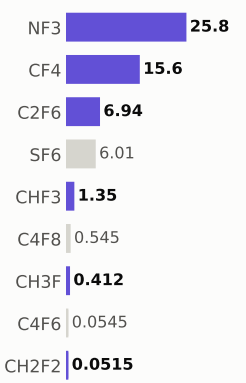

Step #22400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,428.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

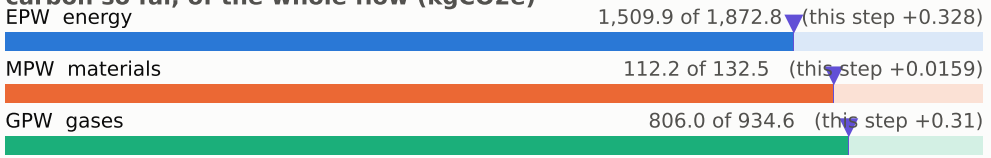

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

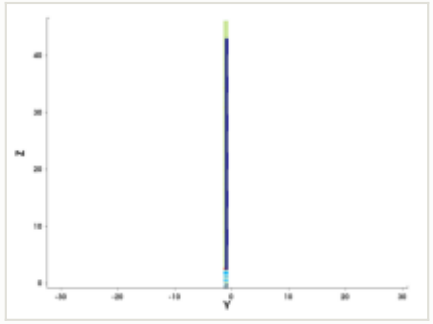

y cut at -1.035 µm

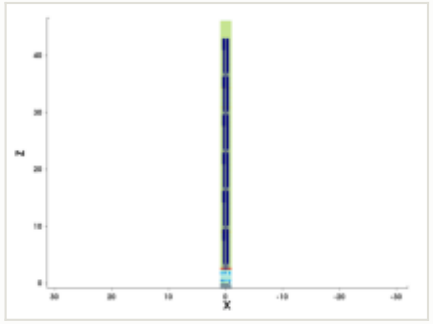

mask for this step

no mask for this step

steps by process area

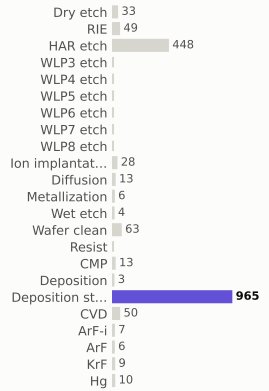

materials deposited (g)

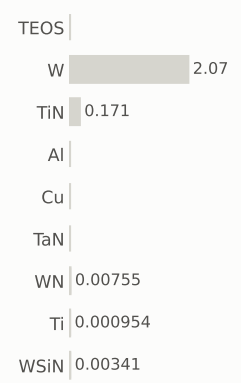

gases emitted (g)

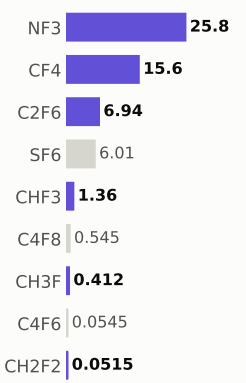

Step #22410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,428.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

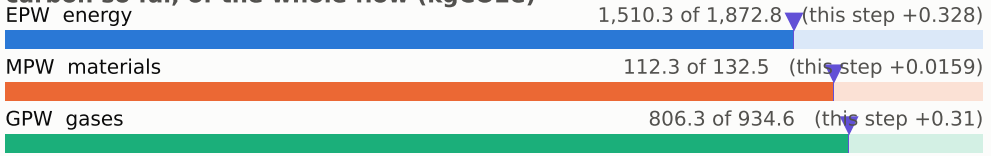

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

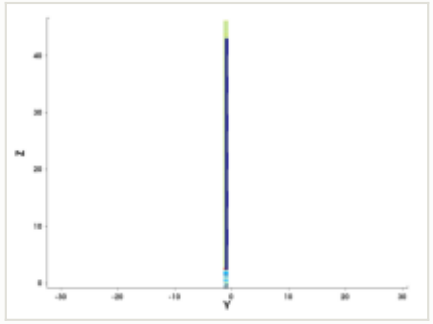

y cut at -1.035 µm

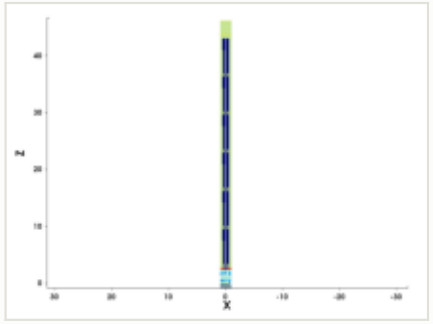

mask for this step

no mask for this step

steps by process area

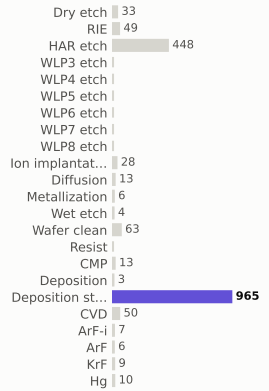

materials deposited (g)

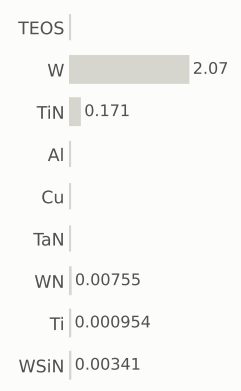

gases emitted (g)

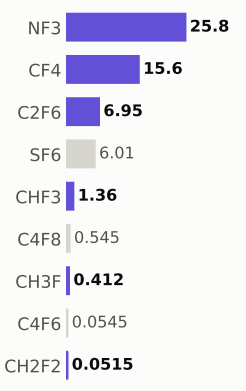

Step #22420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,429.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

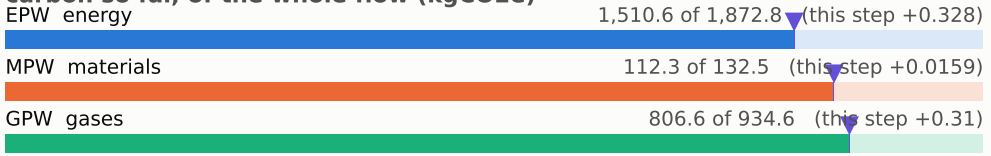

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

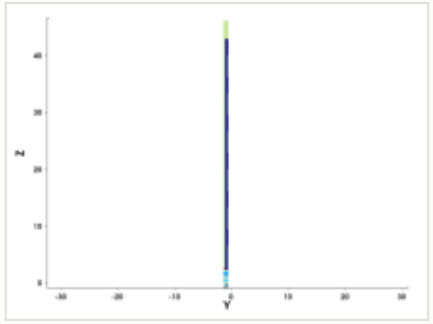

y cut at -1.035 µm

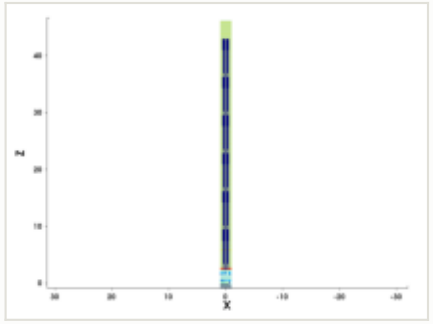

mask for this step

no mask for this step

steps by process area

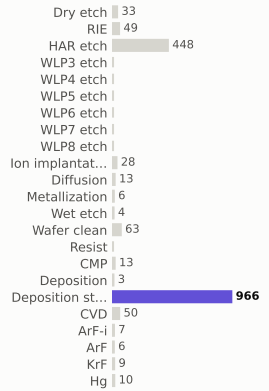

materials deposited (g)

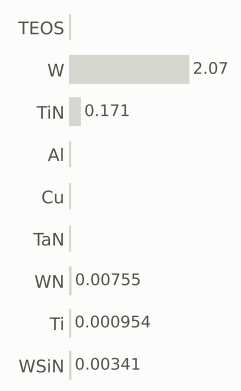

gases emitted (g)

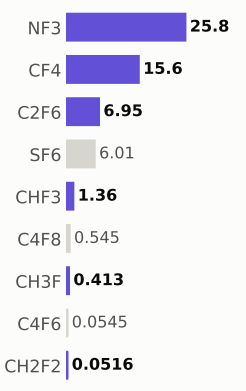

Step #22430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,430.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

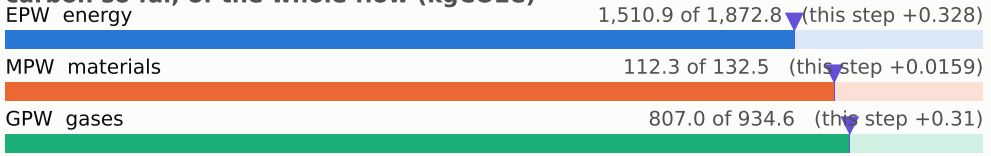

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

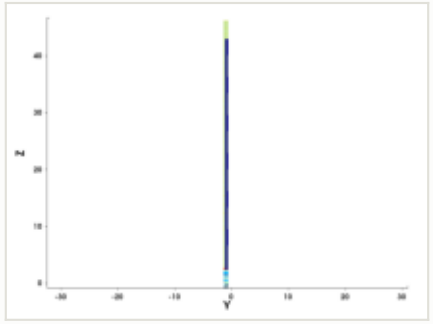

y cut at -1.035 µm

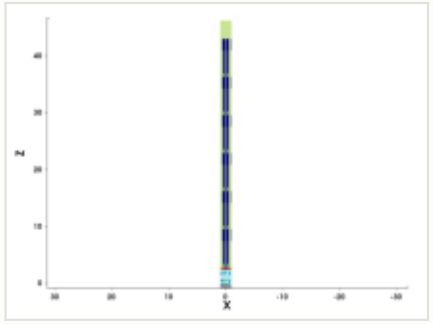

mask for this step

no mask for this step

steps by process area

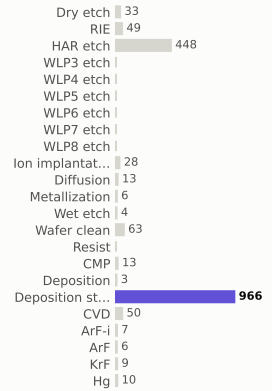

materials deposited (g)

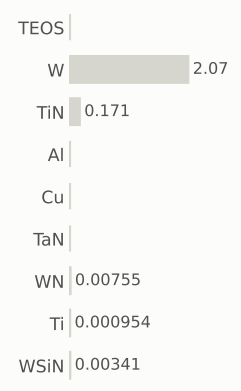

gases emitted (g)

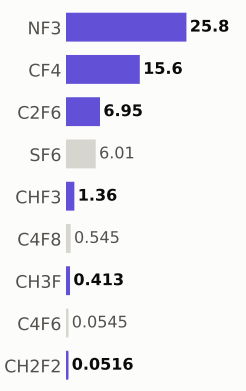

Step #22440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,430.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

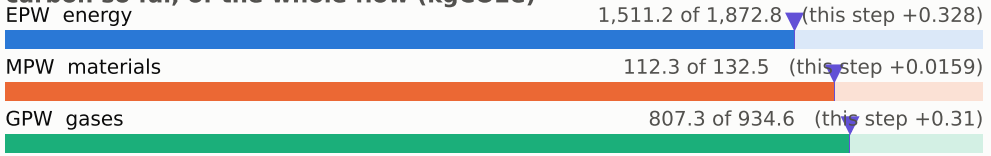

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

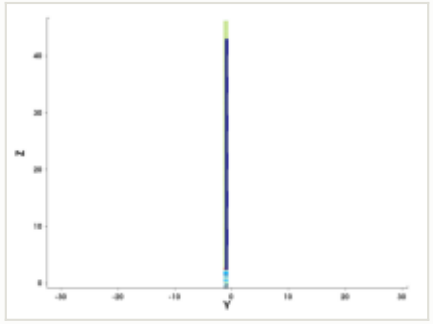

y cut at -1.035 µm

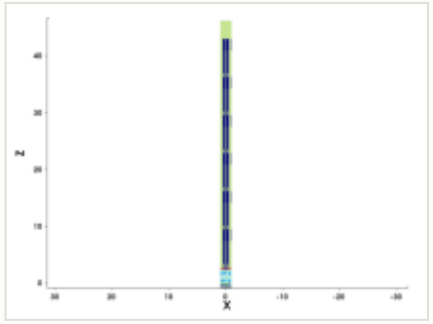

mask for this step

no mask for this step

steps by process area

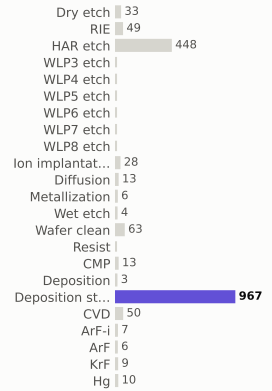

materials deposited (g)

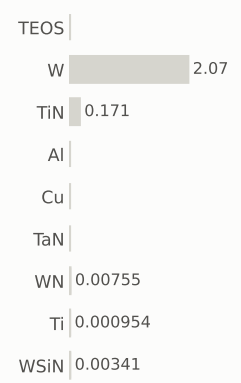

gases emitted (g)

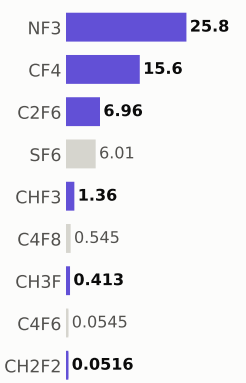

Step #22450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,431.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

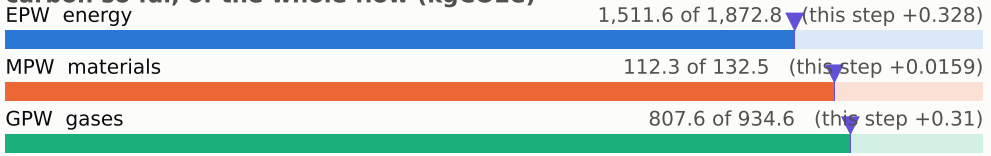

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

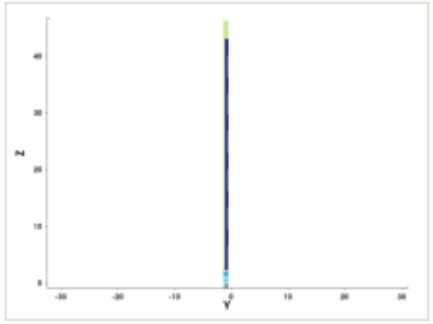

y cut at -1.035 µm

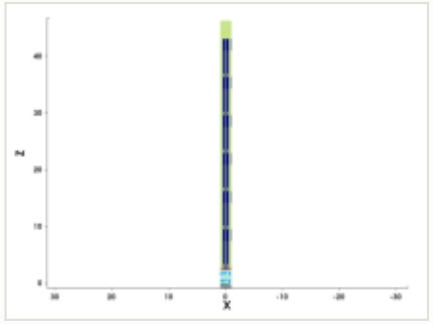

mask for this step

no mask for this step

steps by process area

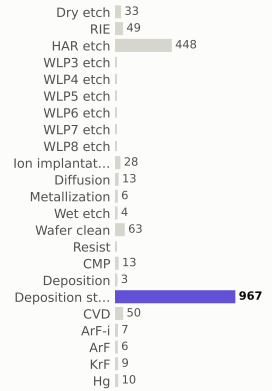

materials deposited (g)

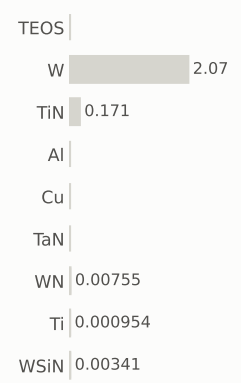

gases emitted (g)

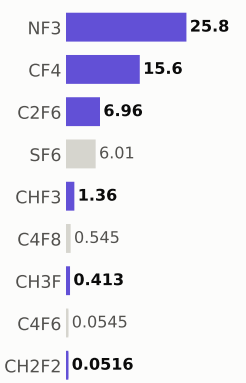

Step #22460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,432.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

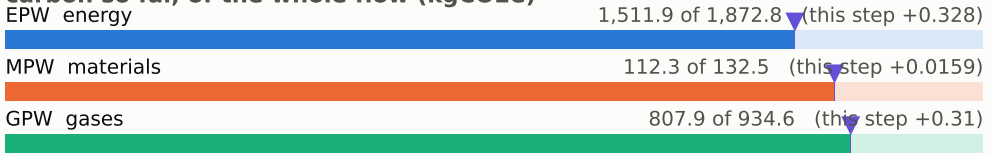

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

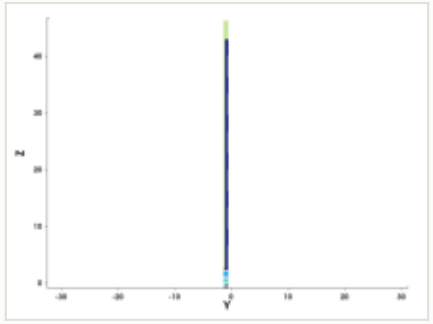

y cut at -1.035 µm

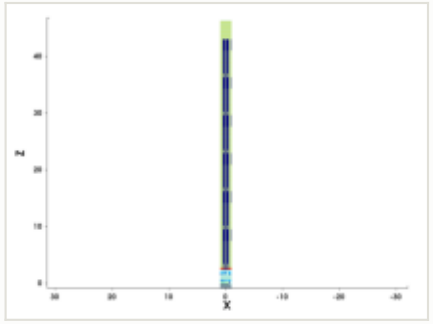

mask for this step

no mask for this step

steps by process area

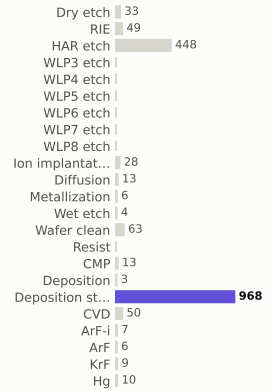

materials deposited (g)

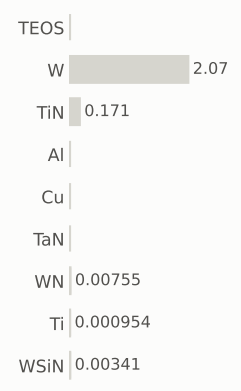

gases emitted (g)

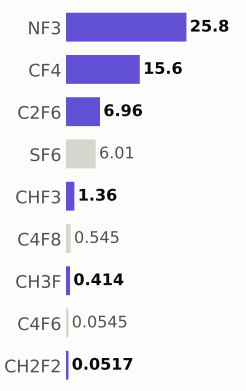

Step #22470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,432.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

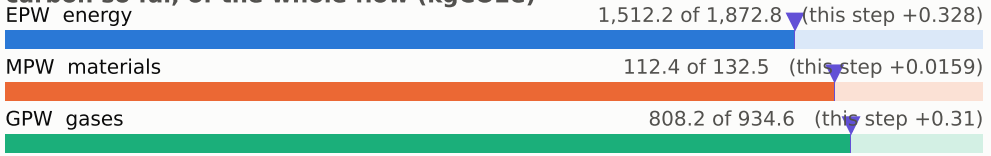

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

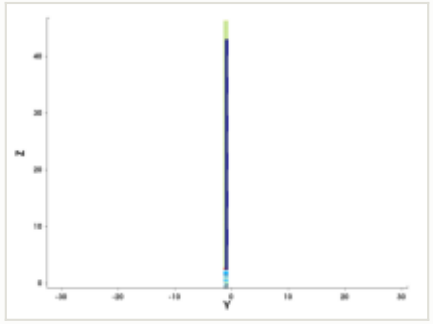

y cut at -1.035 µm

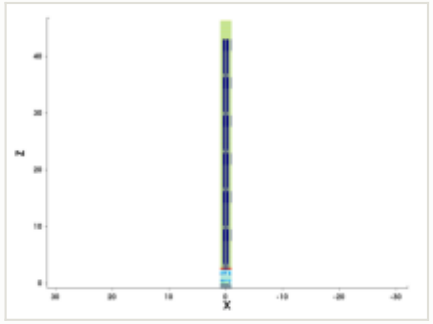

mask for this step

no mask for this step

steps by process area

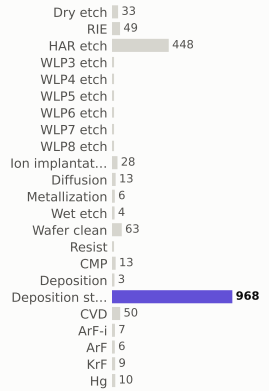

materials deposited (g)

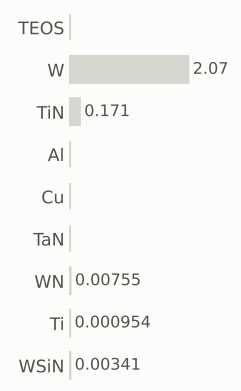

gases emitted (g)

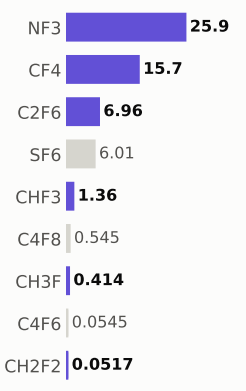

Step #22480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,433.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

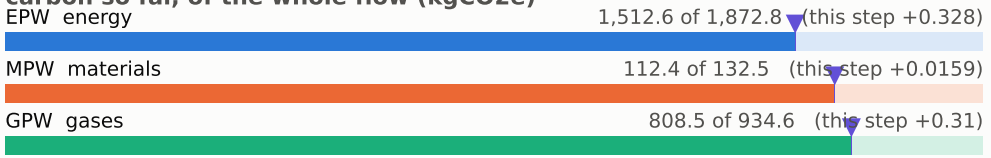

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

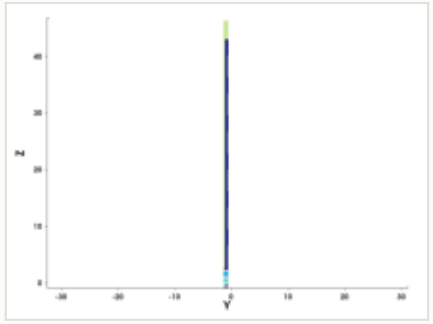

y cut at -1.035 µm

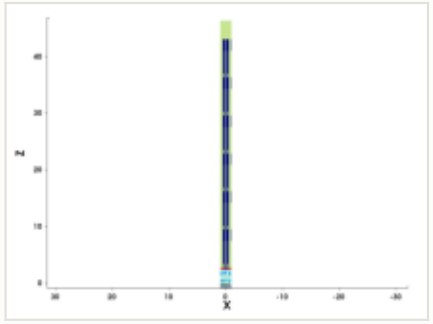

mask for this step

no mask for this step

steps by process area

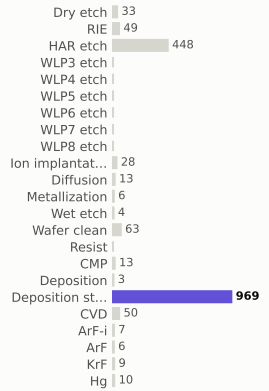

materials deposited (g)

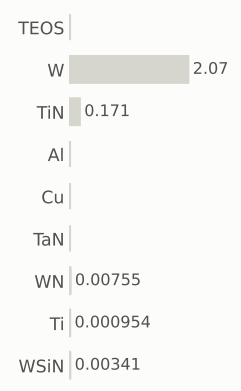

gases emitted (g)

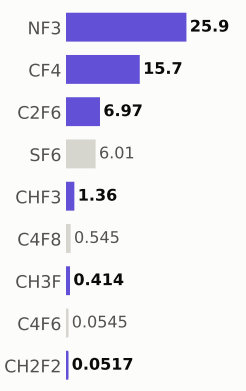

Step #22490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,434.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

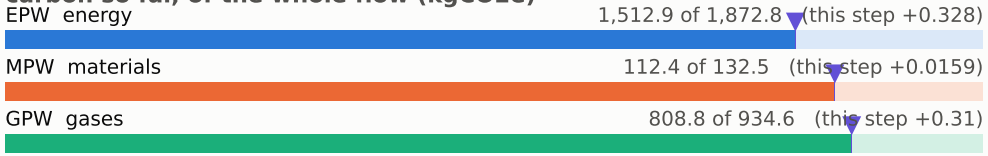

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

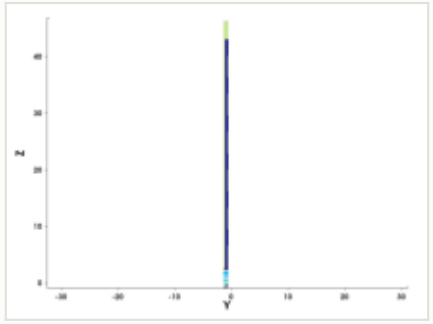

y cut at -1.035 µm

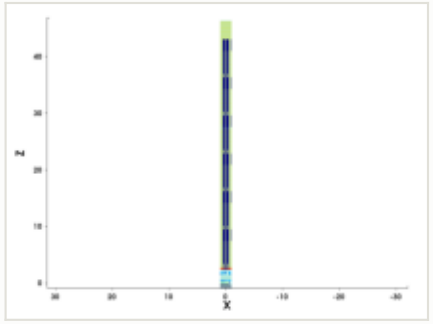

mask for this step

no mask for this step

steps by process area

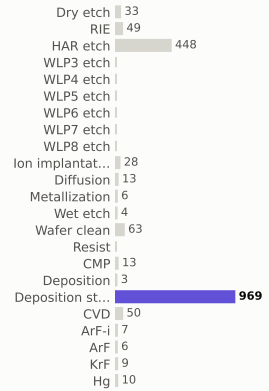

materials deposited (g)

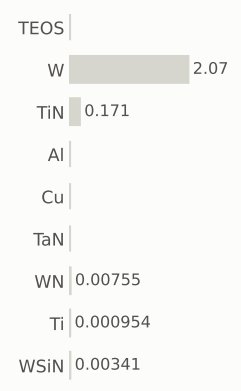

gases emitted (g)

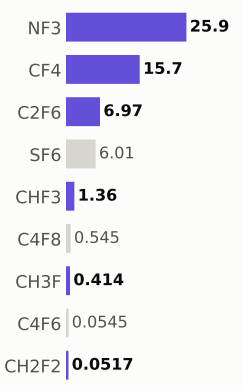

Step #22500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,434.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

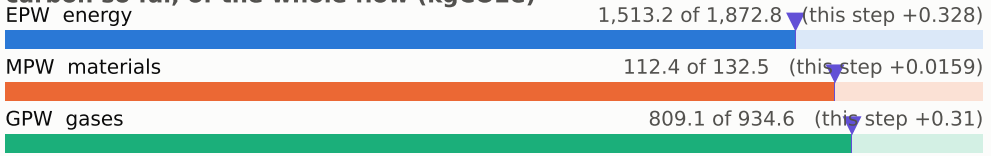

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

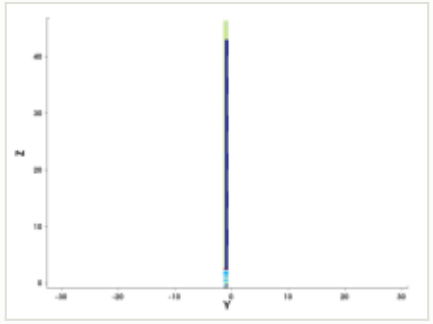

y cut at -1.035 µm

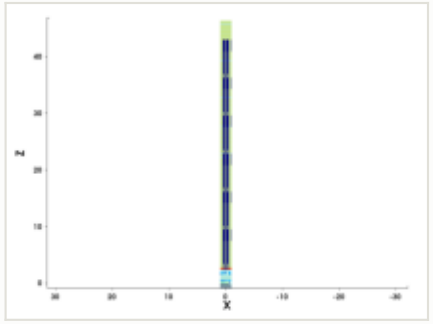

mask for this step

no mask for this step

steps by process area

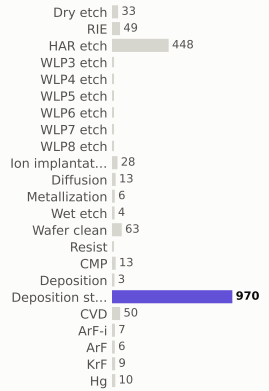

materials deposited (g)

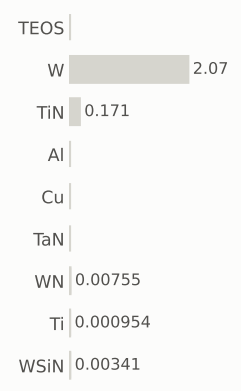

gases emitted (g)

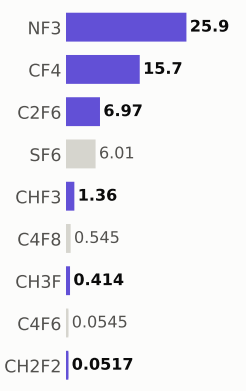

Step #22510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,435.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

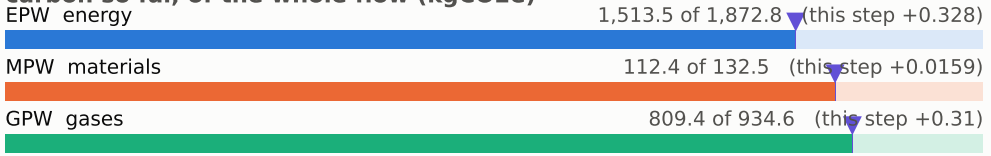

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

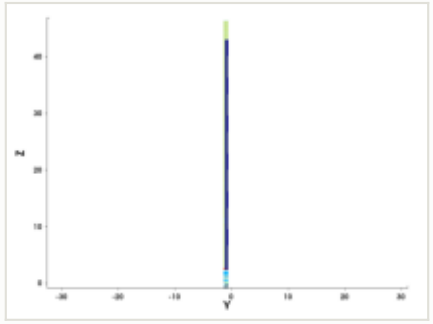

y cut at -1.035 µm

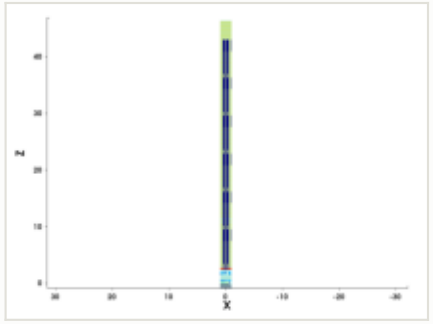

mask for this step

no mask for this step

steps by process area

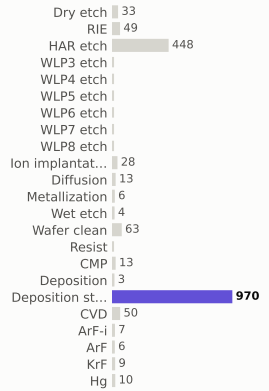

materials deposited (g)

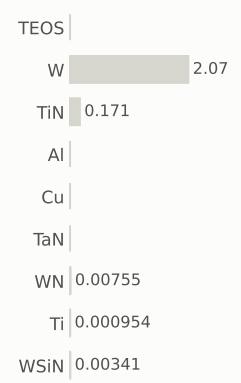

gases emitted (g)

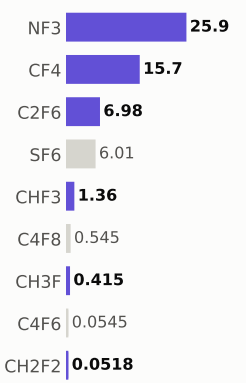

Step #22520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,436.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

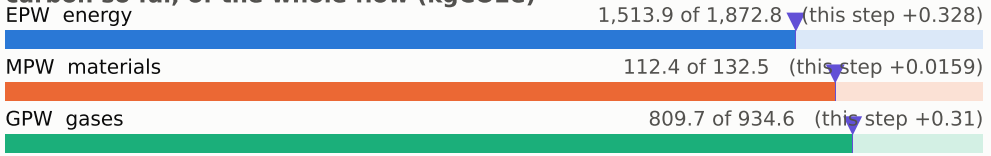

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

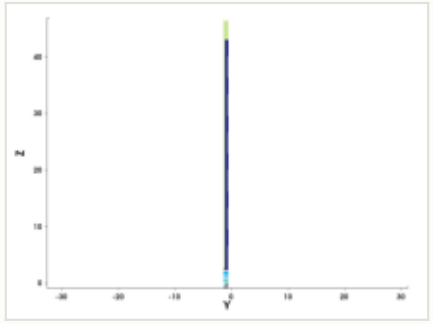

y cut at -1.035 µm

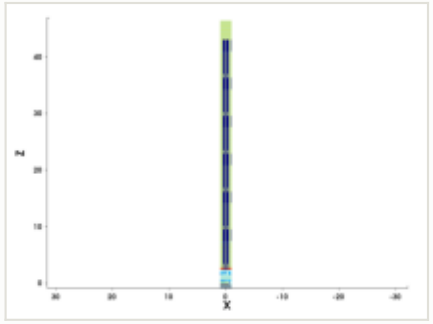

mask for this step

no mask for this step

steps by process area

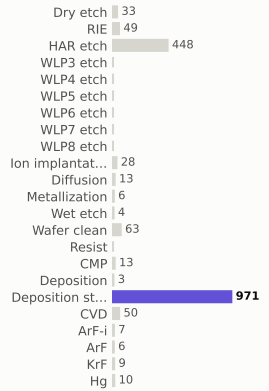

materials deposited (g)

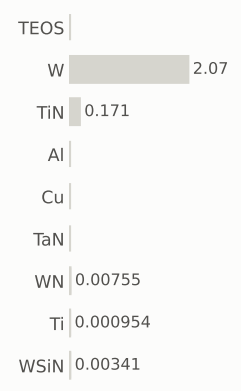

gases emitted (g)

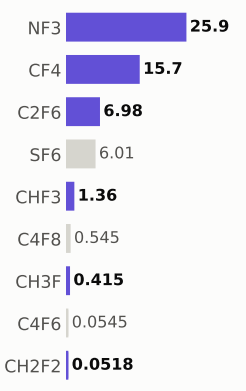

Step #22530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,436.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

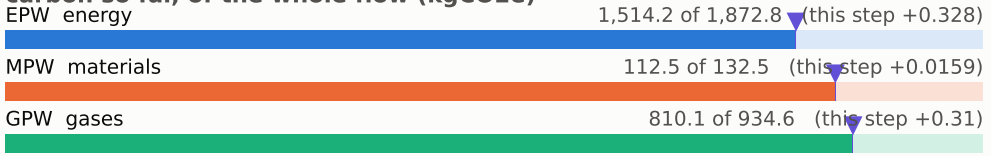

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

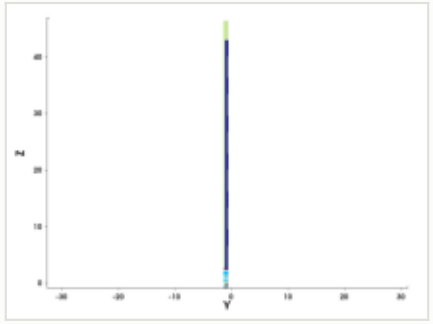

y cut at -1.035 µm

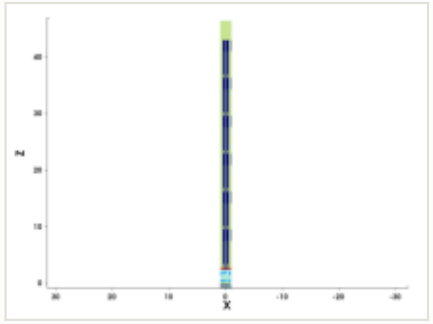

mask for this step

no mask for this step

steps by process area

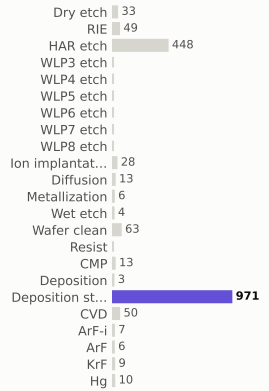

materials deposited (g)

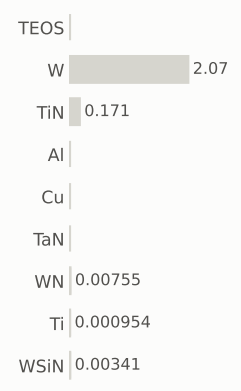

gases emitted (g)

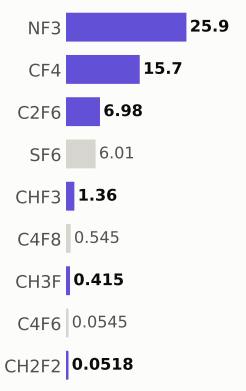

Step #22540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,437.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

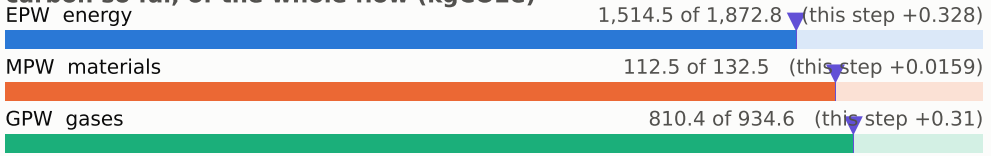

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

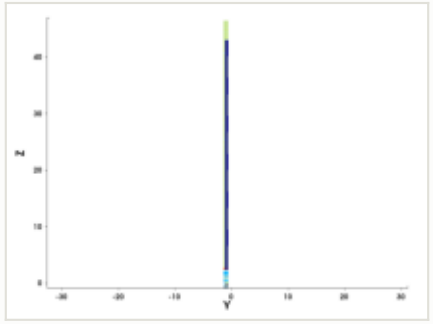

y cut at -1.035 µm

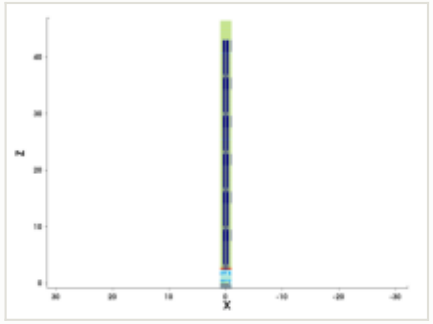

mask for this step

no mask for this step

steps by process area

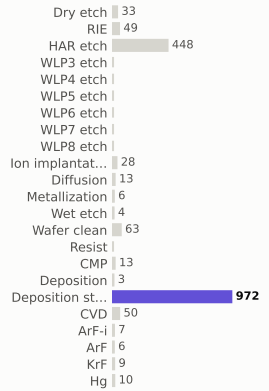

materials deposited (g)

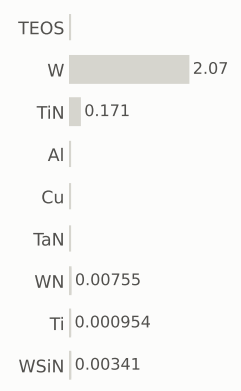

gases emitted (g)

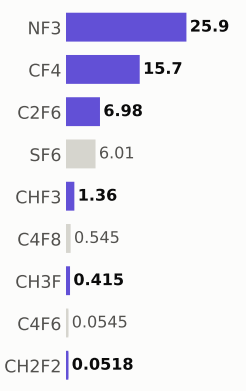

Step #22550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,438.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

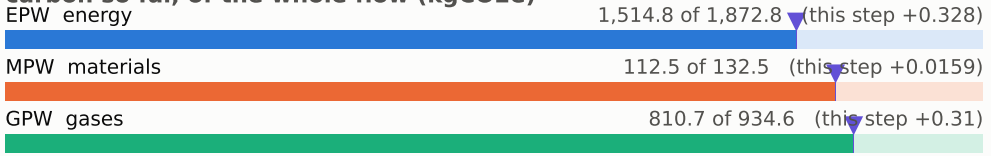

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

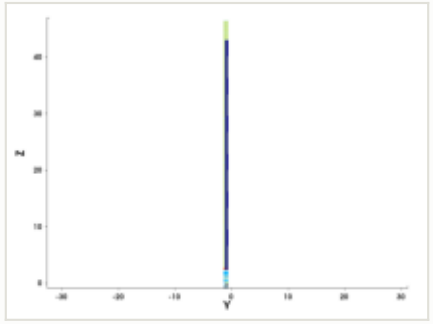

y cut at -1.035 µm

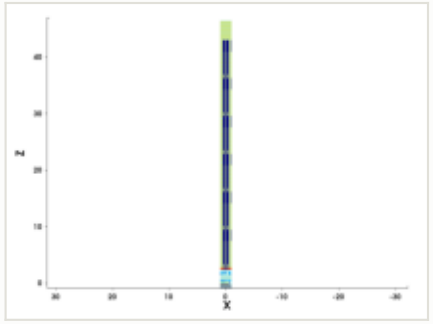

mask for this step

no mask for this step

steps by process area

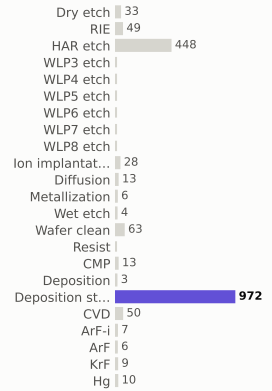

materials deposited (g)

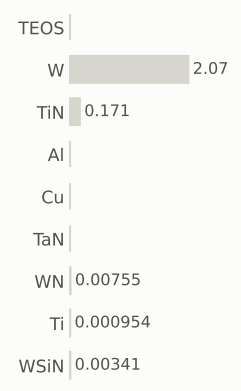

gases emitted (g)

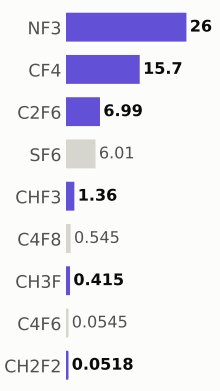

Step #22560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,438.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

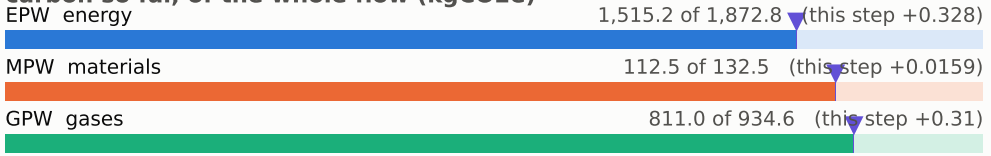

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

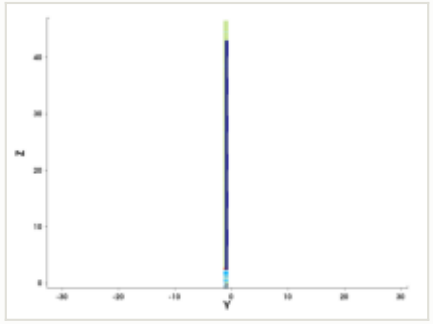

y cut at -1.035 µm

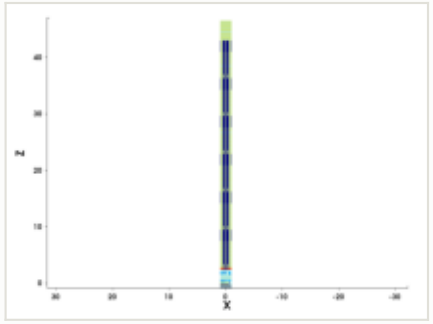

mask for this step

no mask for this step

steps by process area

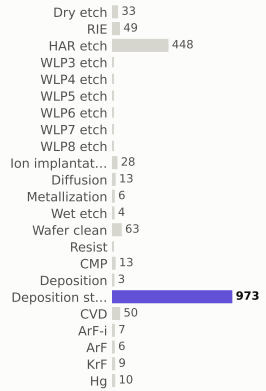

materials deposited (g)

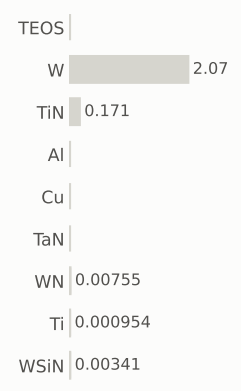

gases emitted (g)

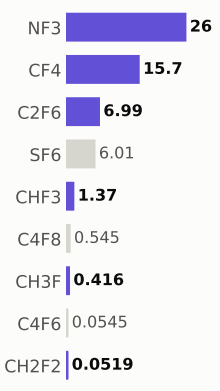

Step #22570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,439.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

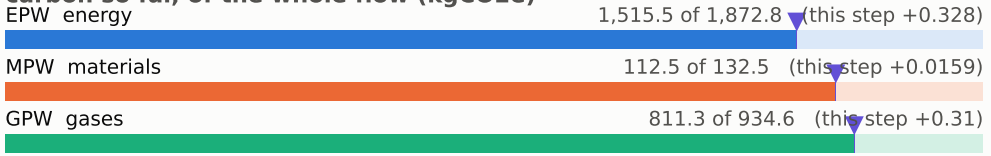

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

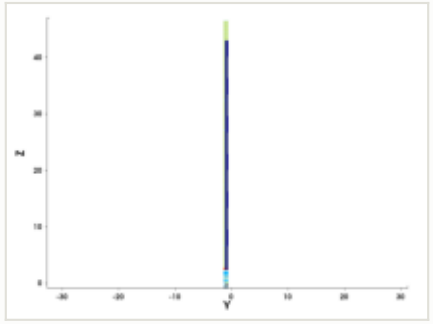

y cut at -1.035 µm

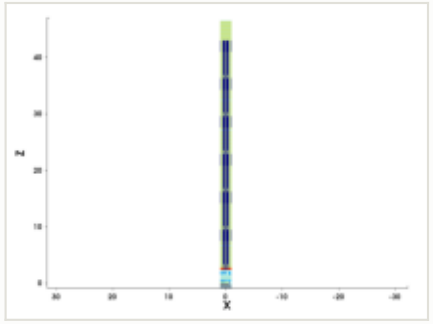

mask for this step

no mask for this step

steps by process area

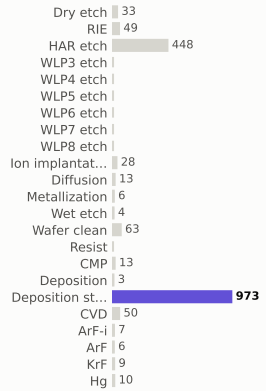

materials deposited (g)

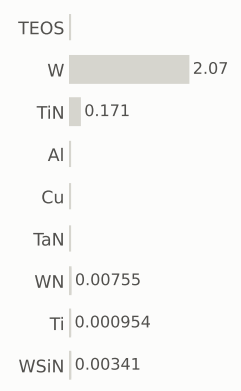

gases emitted (g)

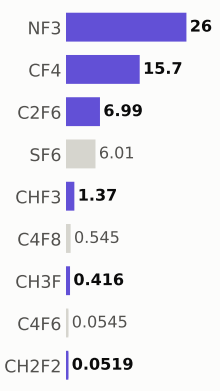

Step #22580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,440.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

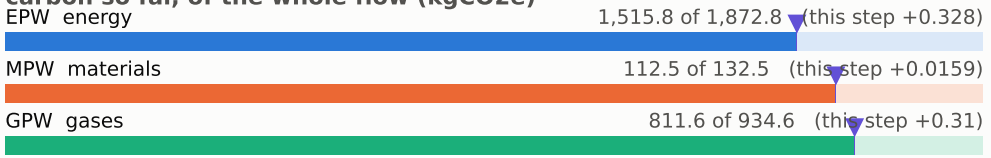

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

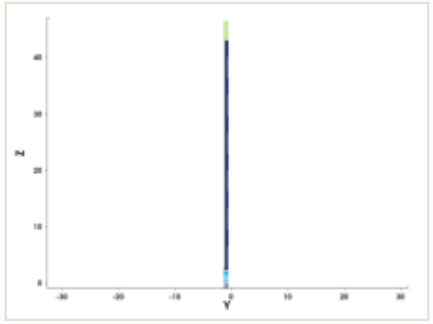

y cut at -1.035 µm

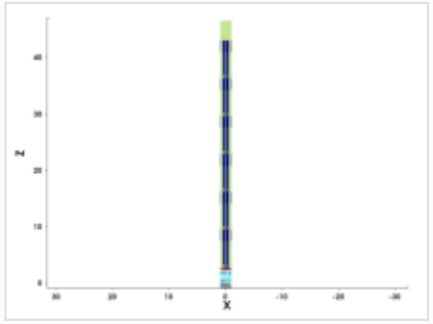

mask for this step

no mask for this step

steps by process area

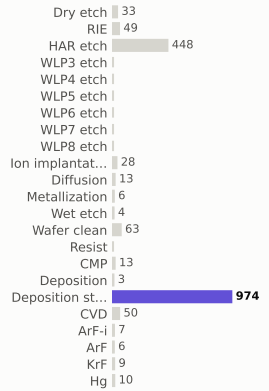

materials deposited (g)

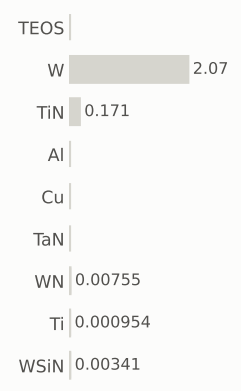

gases emitted (g)

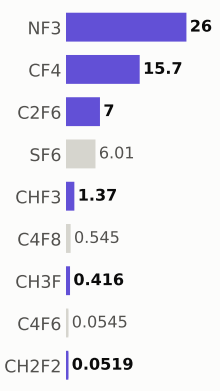

Step #22590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,440.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

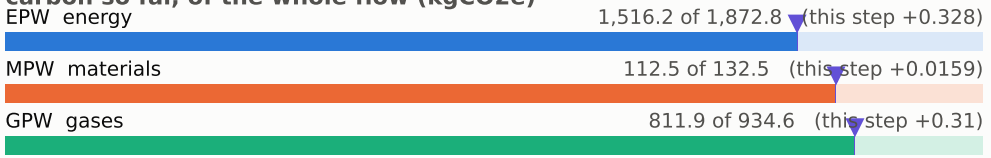

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

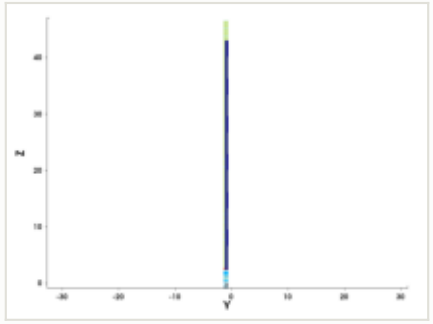

y cut at -1.035 µm

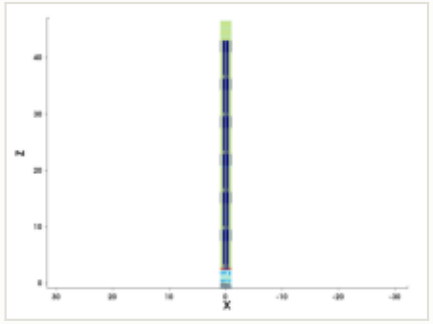

mask for this step

no mask for this step

steps by process area

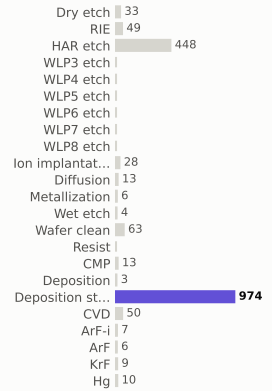

materials deposited (g)

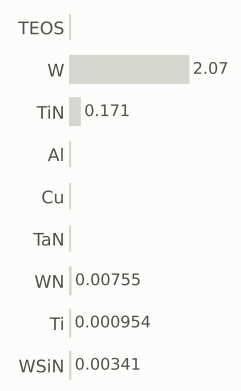

gases emitted (g)

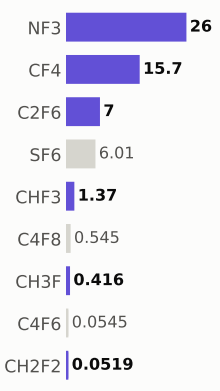

Step #22600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,441.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

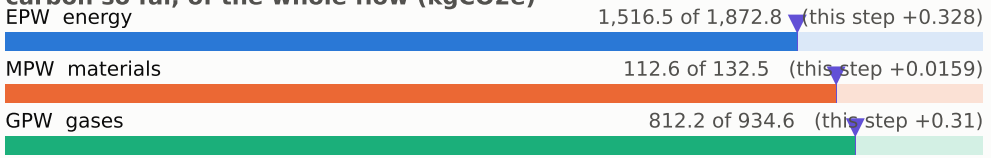

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

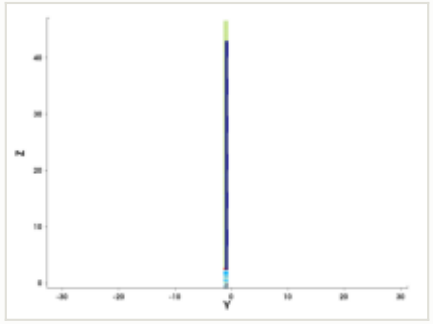

y cut at -1.035 µm

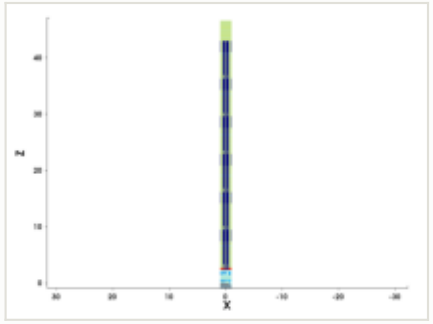

mask for this step

no mask for this step

steps by process area

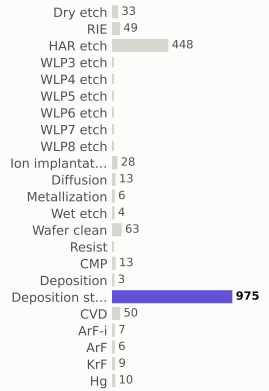

materials deposited (g)

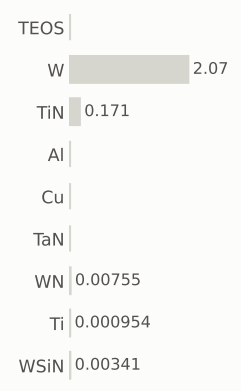

gases emitted (g)

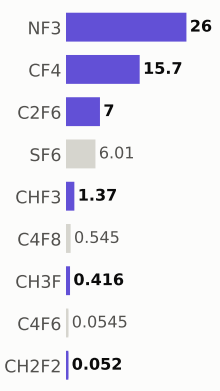

Step #22610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,441.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

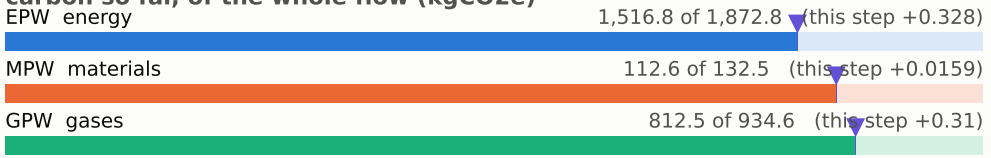

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

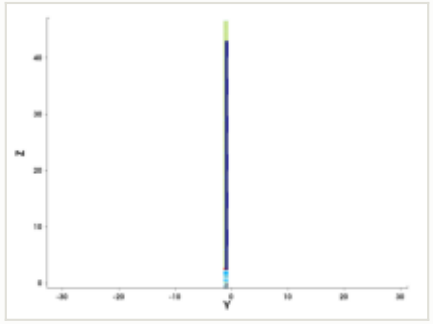

y cut at -1.035 µm

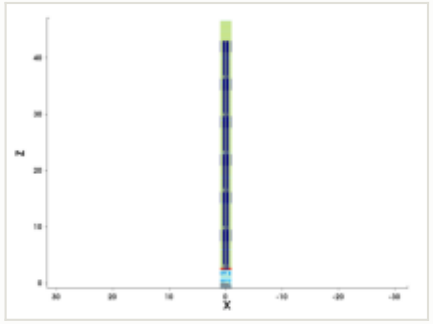

mask for this step

no mask for this step

steps by process area

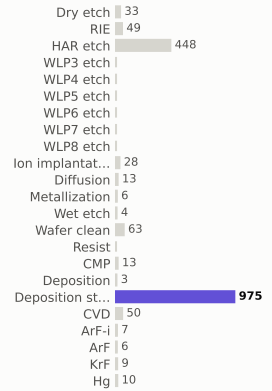

materials deposited (g)

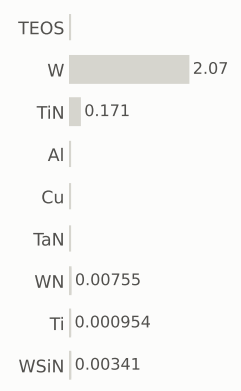

gases emitted (g)

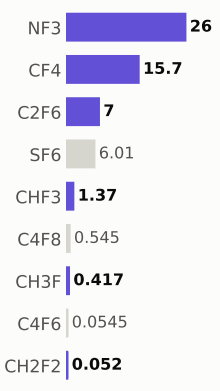

Step #22620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,442.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

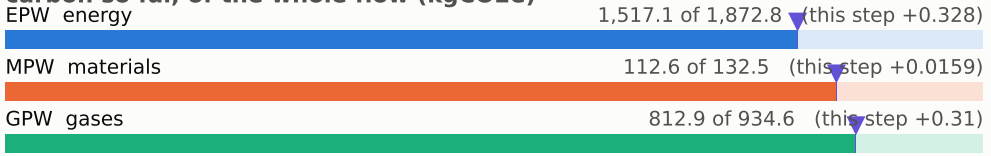

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

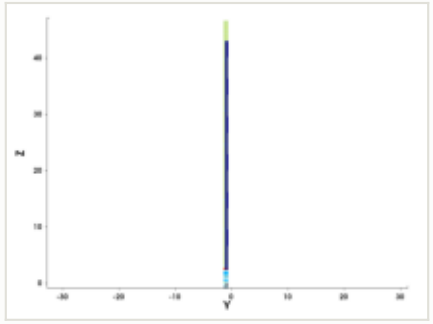

y cut at -1.035 µm

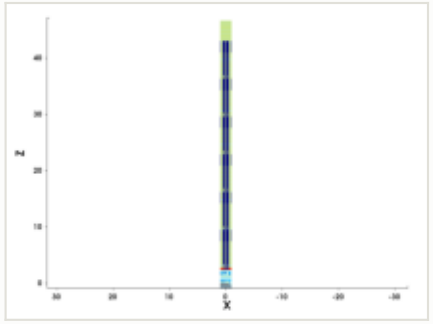

mask for this step

no mask for this step

steps by process area

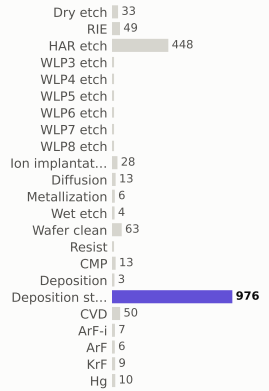

materials deposited (g)

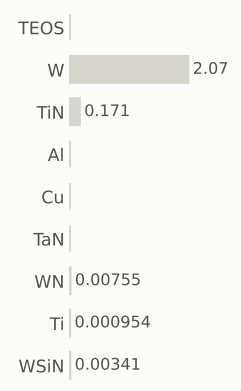

gases emitted (g)



Step #22630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,443.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

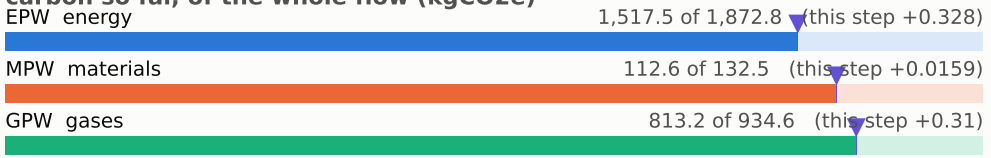

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

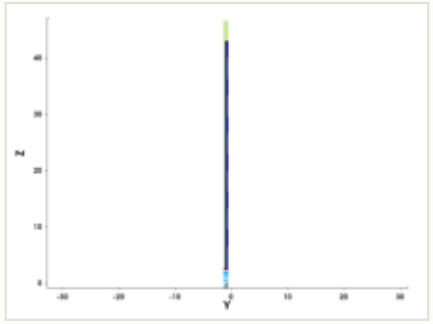

y cut at -1.035 µm

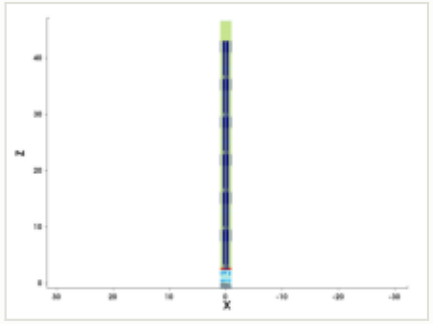

mask for this step

no mask for this step

steps by process area

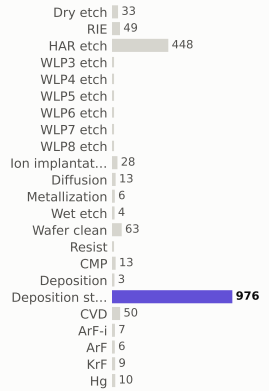

materials deposited (g)

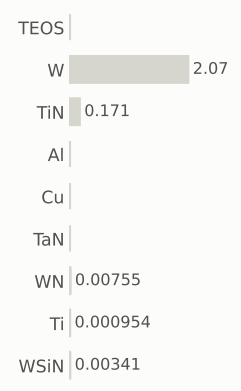

gases emitted (g)

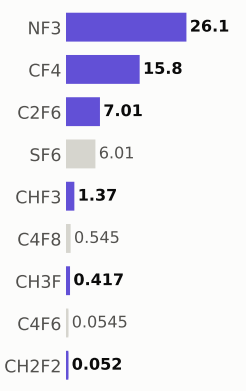

Step #22640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,443.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

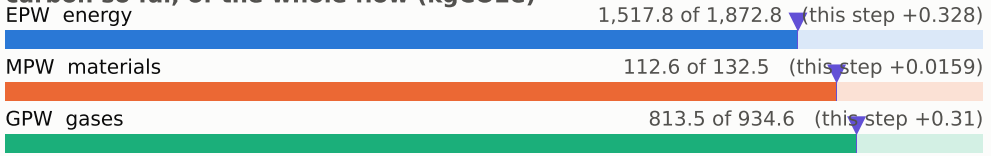

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

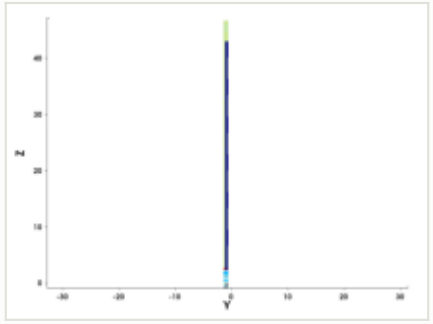

y cut at -1.035 µm

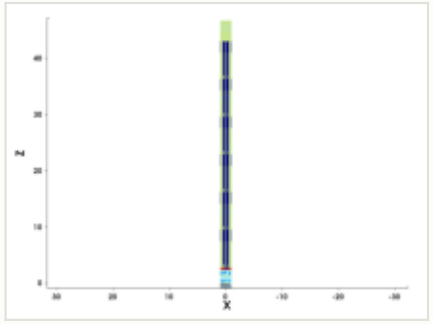

mask for this step

no mask for this step

steps by process area

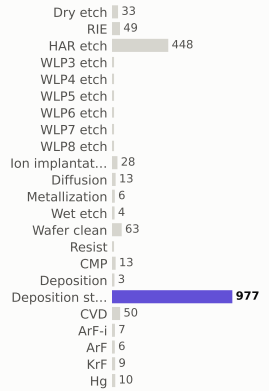

materials deposited (g)

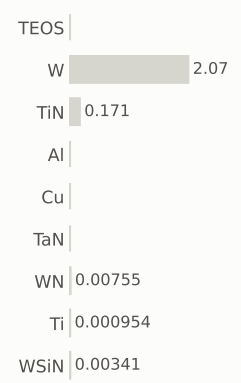

gases emitted (g)

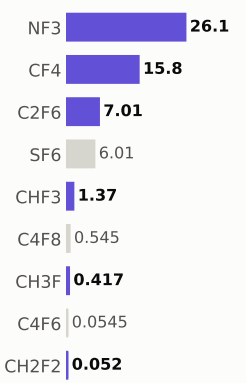

Step #22650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,444.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

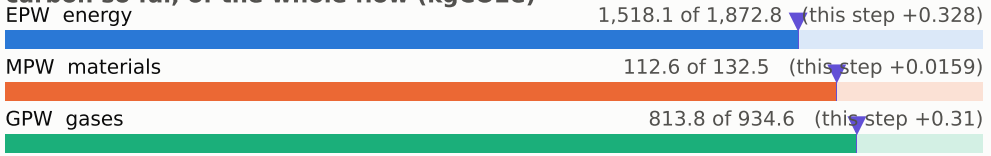

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

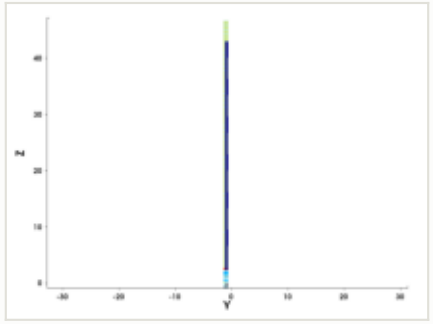

y cut at -1.035 µm

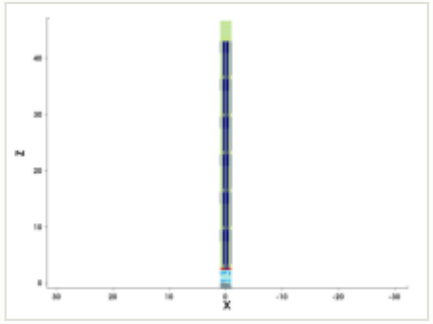

mask for this step

no mask for this step

steps by process area

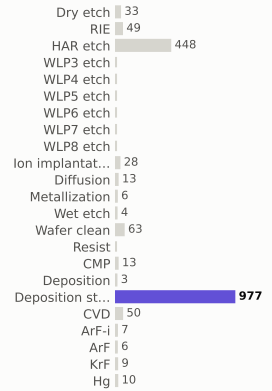

materials deposited (g)

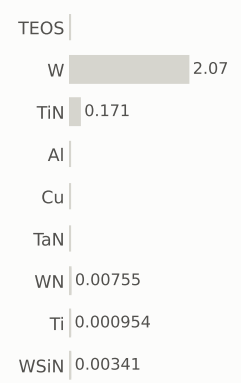

gases emitted (g)

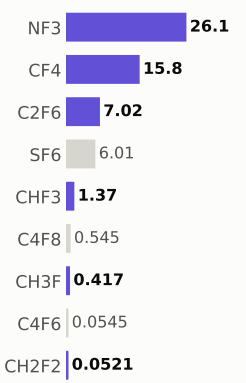

Step #22660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,445.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

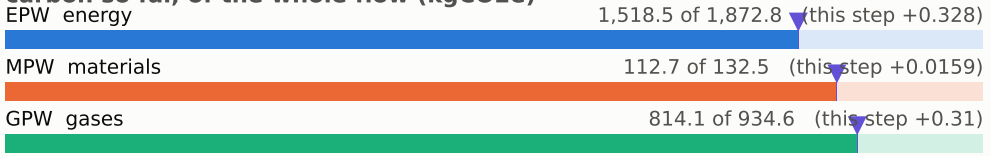

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

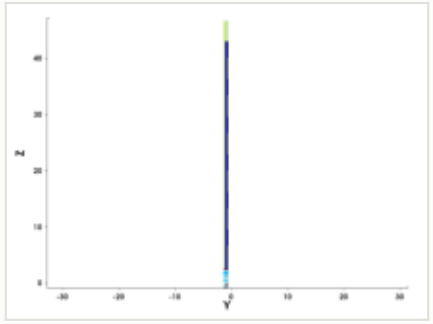

y cut at -1.035 µm

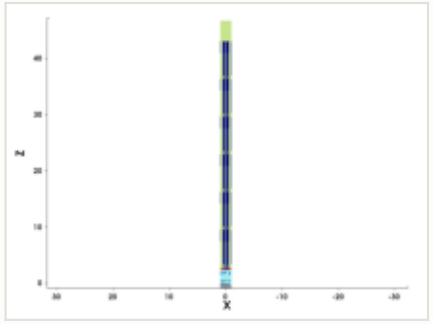

mask for this step

no mask for this step

steps by process area

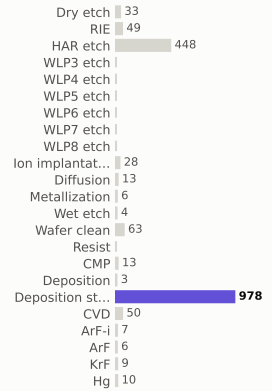

materials deposited (g)

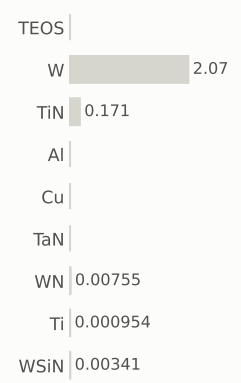

gases emitted (g)

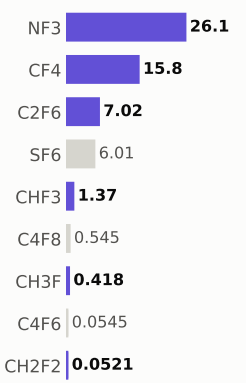

Step #22670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,445.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

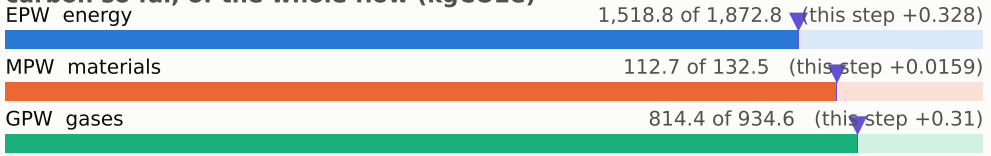

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

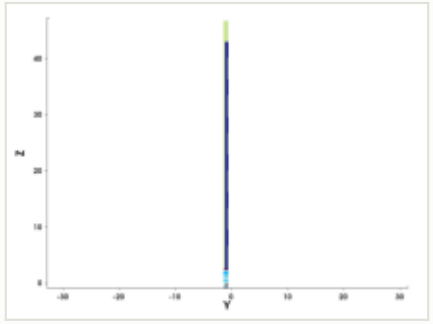

y cut at -1.035 µm

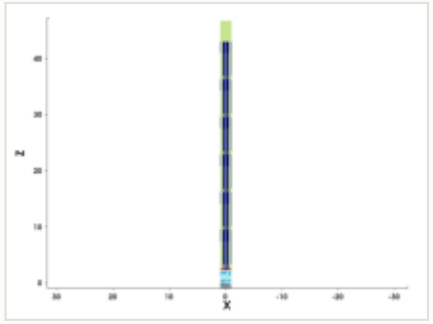

mask for this step

no mask for this step

steps by process area

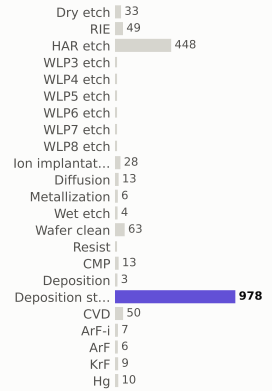

materials deposited (g)

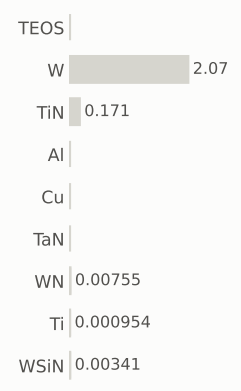

gases emitted (g)



Step #22680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,446.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

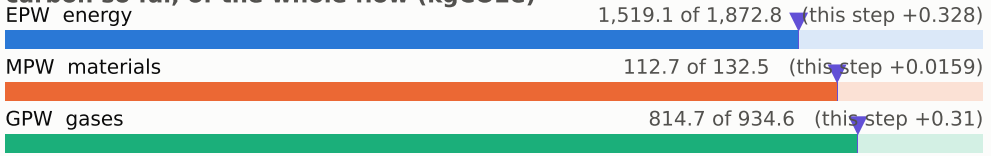

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

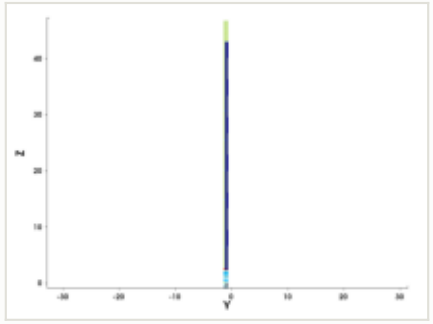

y cut at -1.035 µm

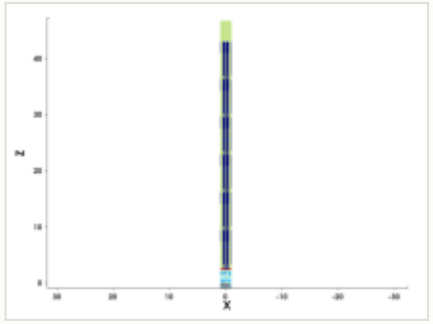

mask for this step

no mask for this step

steps by process area

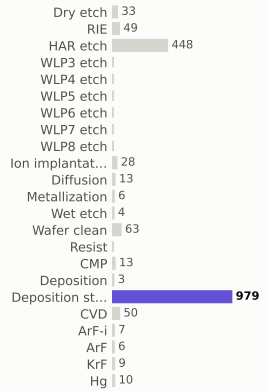

materials deposited (g)

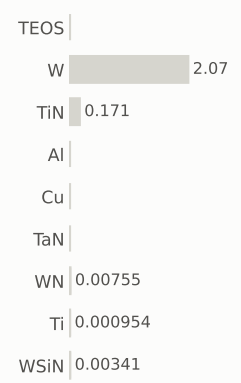

gases emitted (g)

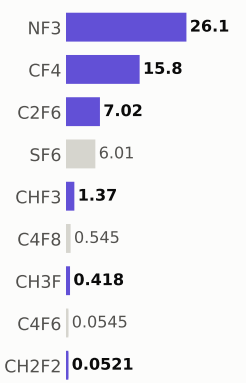

Step #22690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,447.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

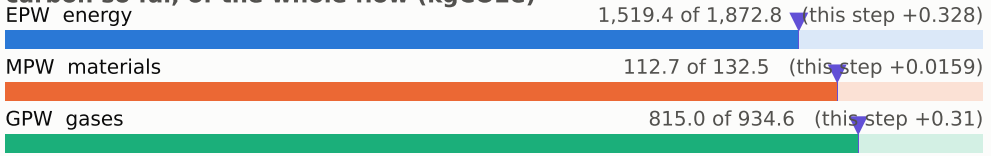

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

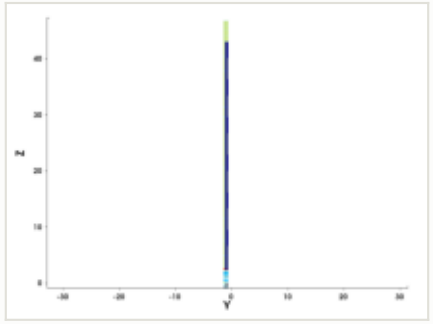

y cut at -1.035 µm

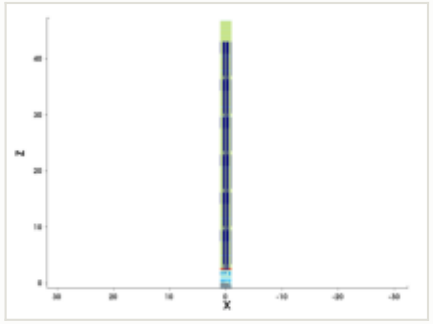

mask for this step

no mask for this step

steps by process area

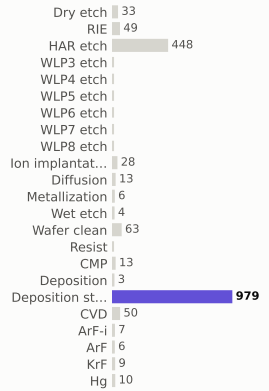

materials deposited (g)

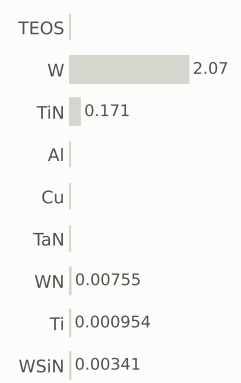

gases emitted (g)



Step #22700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,447.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

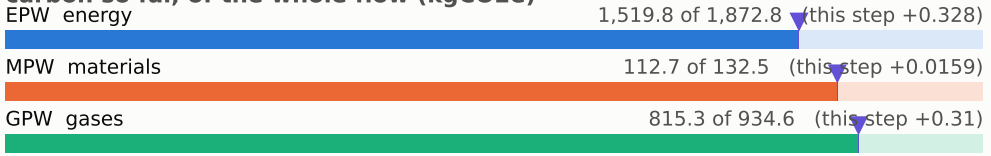

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

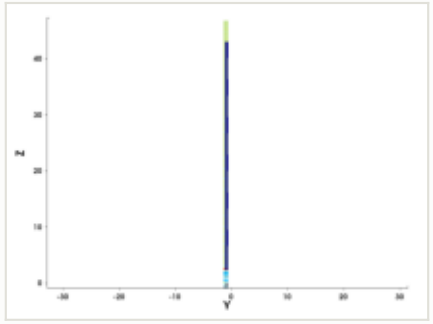

y cut at -1.035 µm

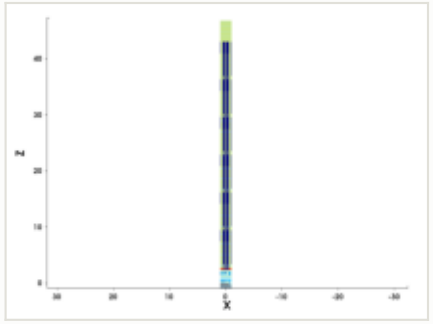

mask for this step

no mask for this step

steps by process area

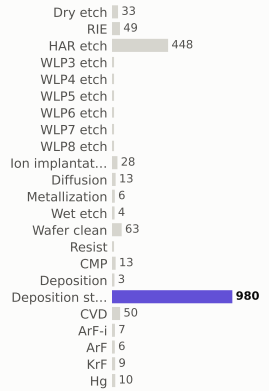

materials deposited (g)

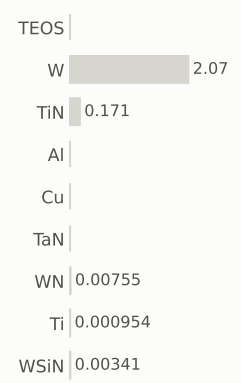

gases emitted (g)



Step #22710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,448.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

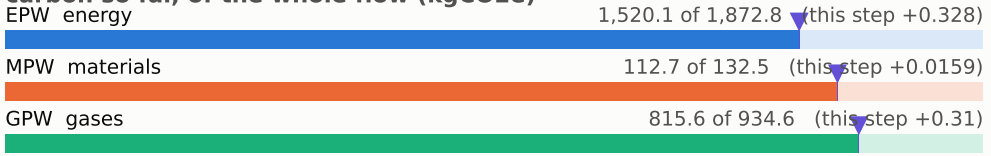

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

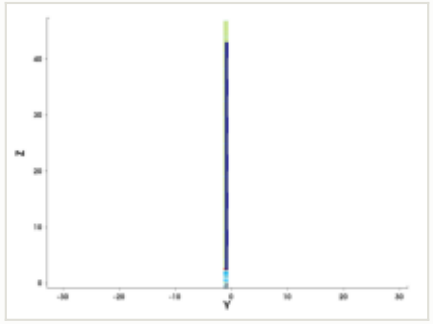

y cut at -1.035 µm

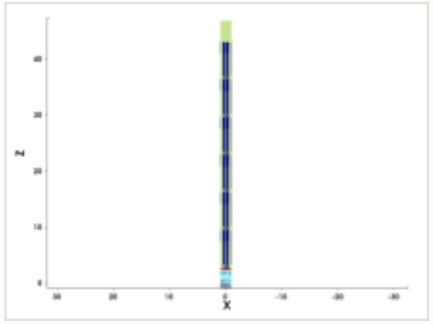

mask for this step

no mask for this step

steps by process area

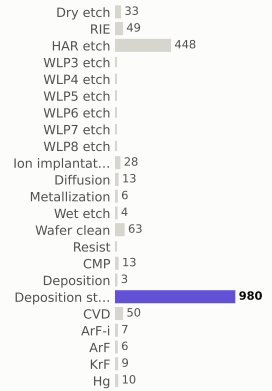

materials deposited (g)

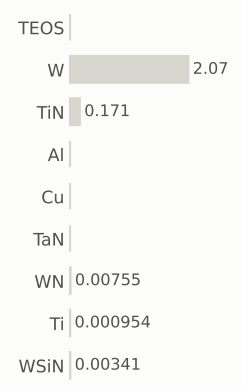

gases emitted (g)

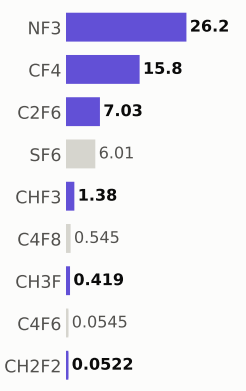

Step #22720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,449.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

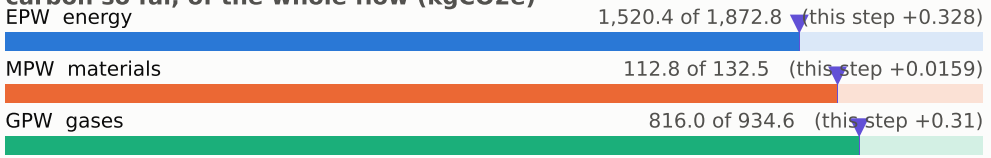

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

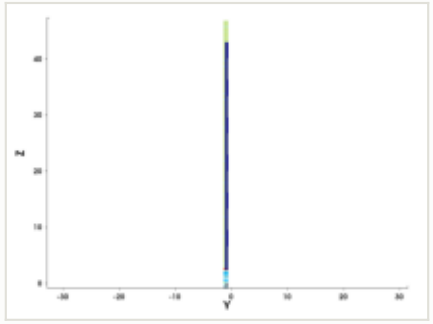

y cut at -1.035 µm

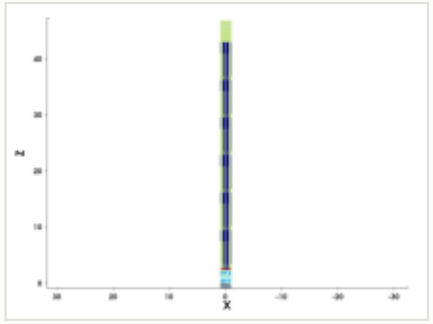

mask for this step

no mask for this step

steps by process area

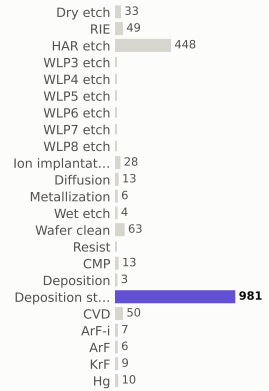

materials deposited (g)

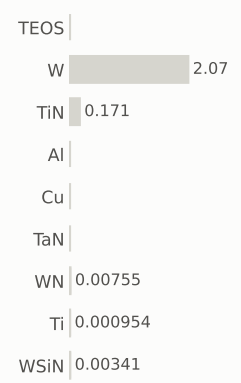

gases emitted (g)

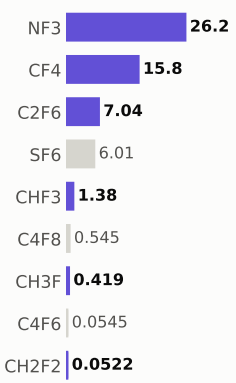

Step #22730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,449.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

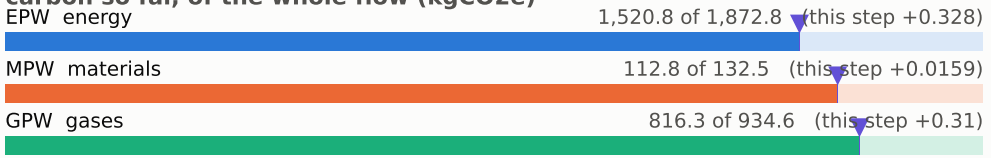

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

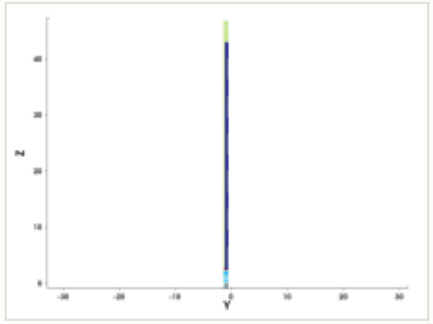

y cut at -1.035 µm

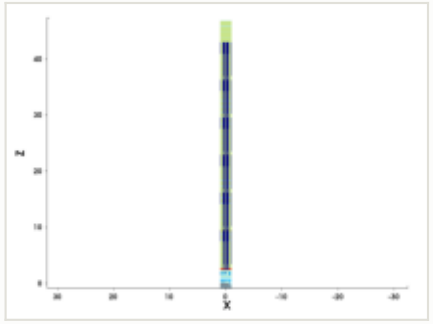

mask for this step

no mask for this step

steps by process area

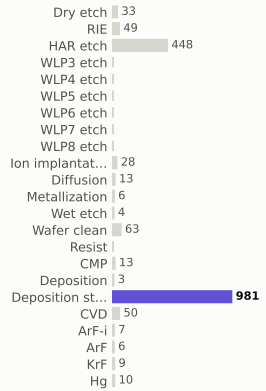

materials deposited (g)

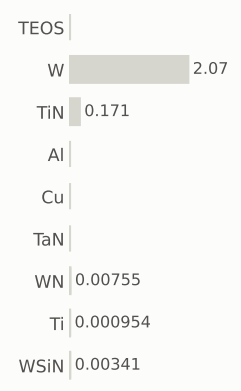

gases emitted (g)

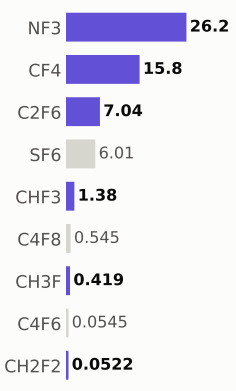

Step #22740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,450.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

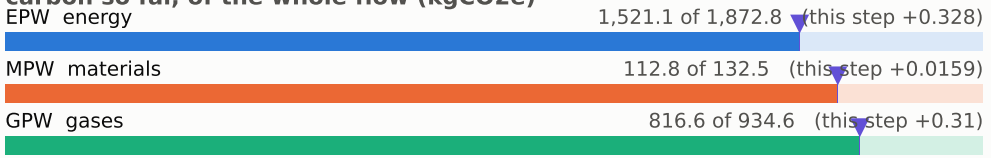

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

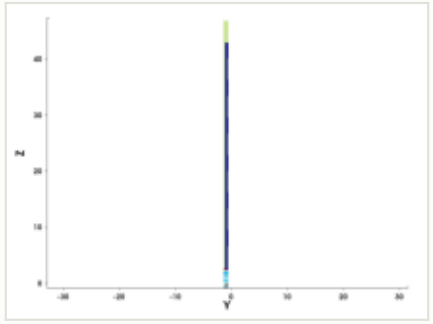

y cut at -1.035 µm

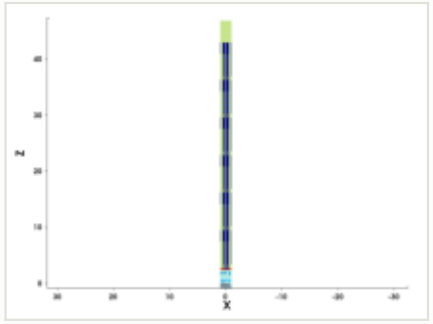

mask for this step

no mask for this step

steps by process area

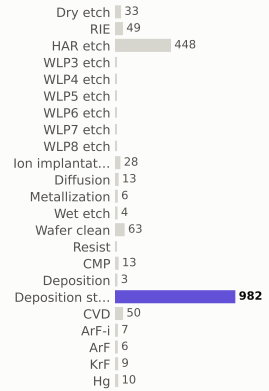

materials deposited (g)

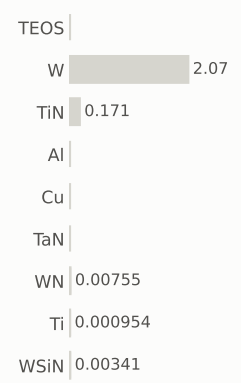

gases emitted (g)

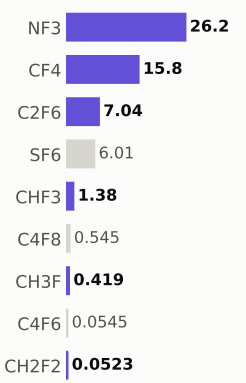

Step #22750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,451.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

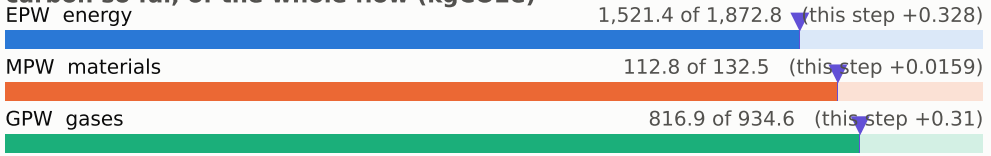

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

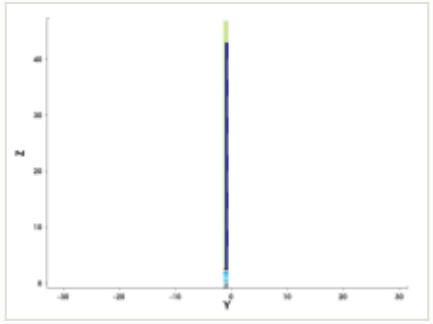

y cut at -1.035 µm

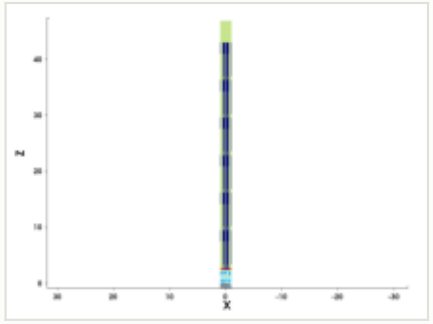

mask for this step

no mask for this step

steps by process area

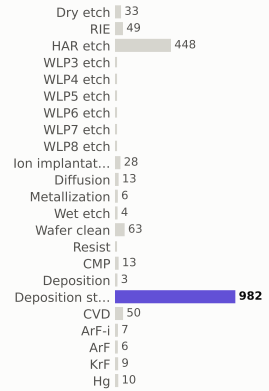

materials deposited (g)

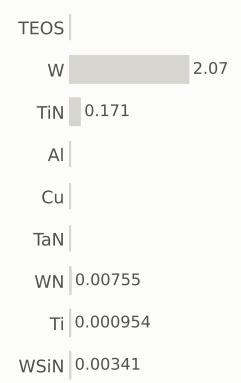

gases emitted (g)

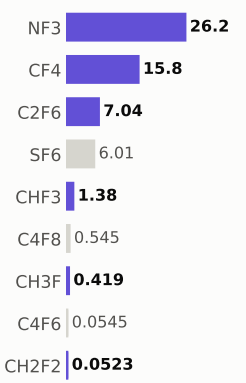

Step #22760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,451.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

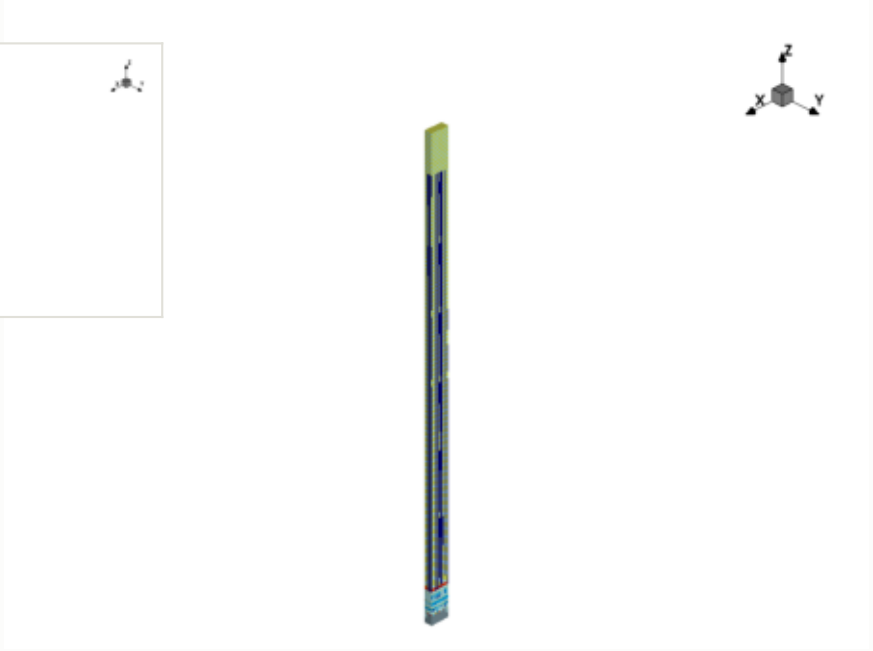

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

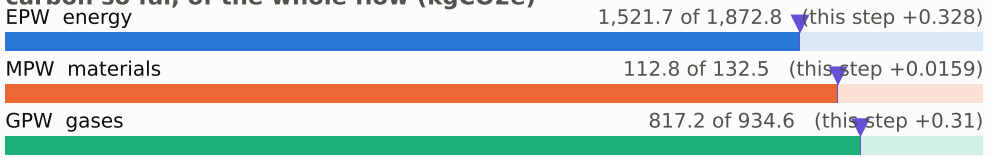

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

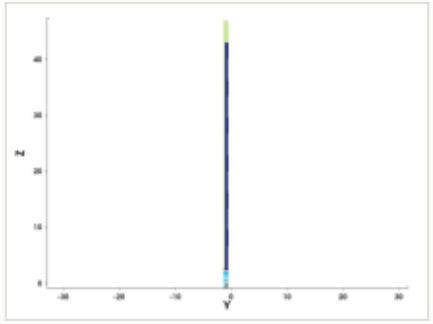

y cut at -1.035 µm

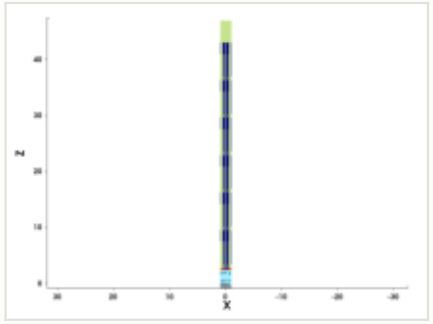

mask for this step

no mask for this step

steps by process area

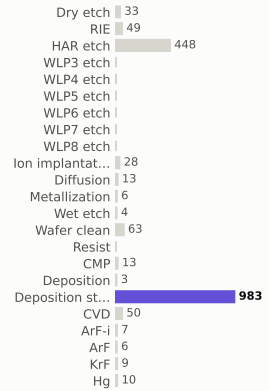

materials deposited (g)

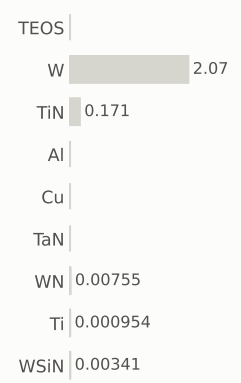

gases emitted (g)

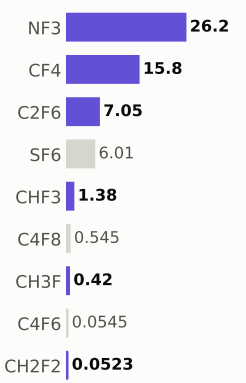

Step #22770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,452.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

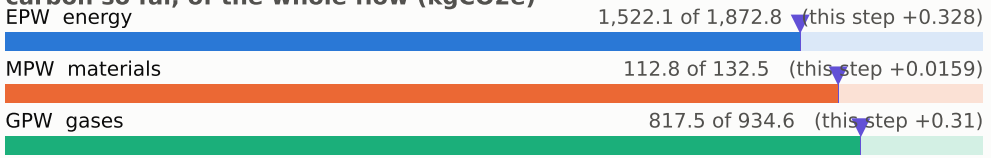

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

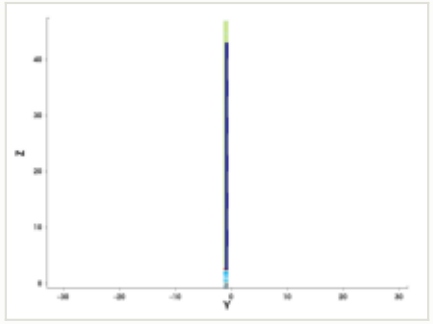

y cut at -1.035 µm

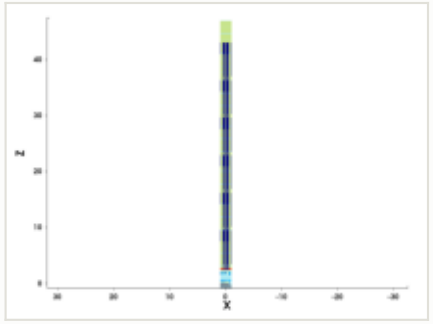

mask for this step

no mask for this step

steps by process area

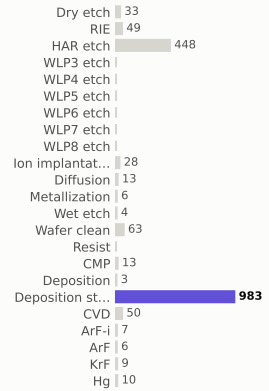

materials deposited (g)

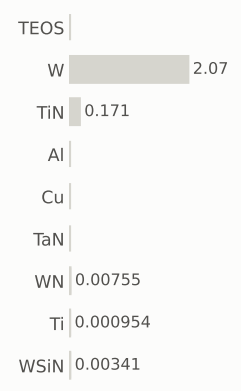

gases emitted (g)

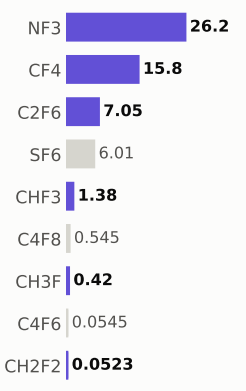

Step #22780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,453.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

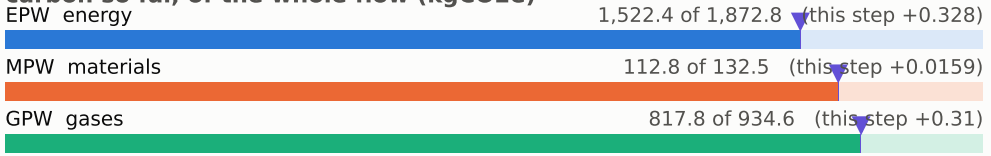

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

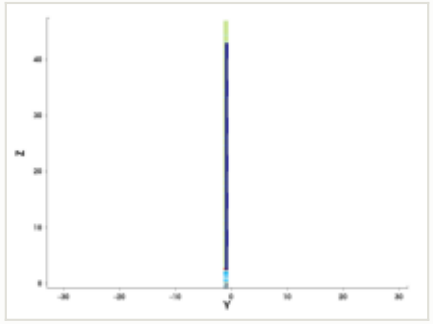

y cut at -1.035 µm

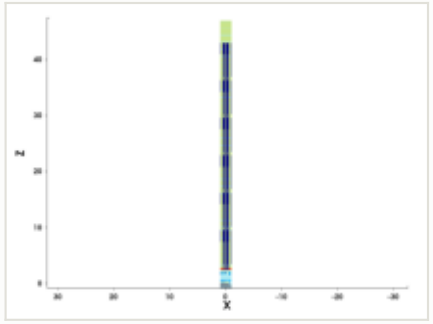

mask for this step

no mask for this step

steps by process area

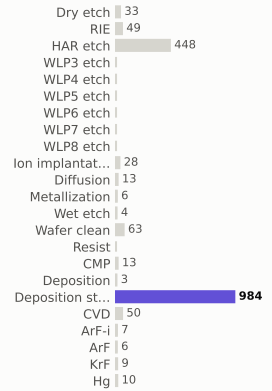

materials deposited (g)

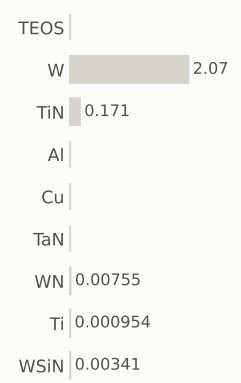

gases emitted (g)

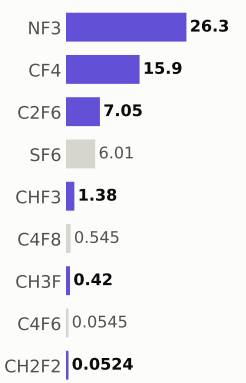

Step #22790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,453.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

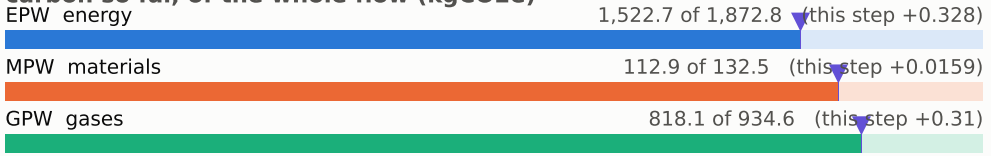

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

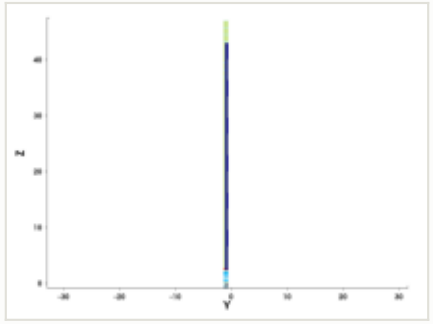

y cut at -1.035 µm

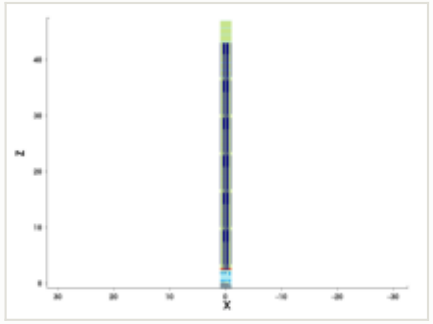

mask for this step

no mask for this step

steps by process area

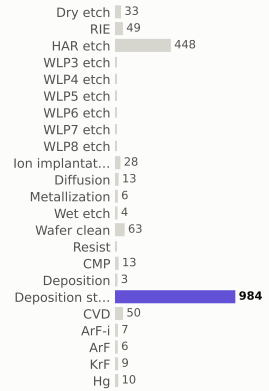

materials deposited (g)

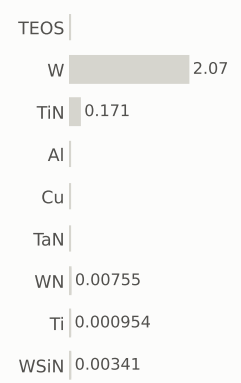

gases emitted (g)

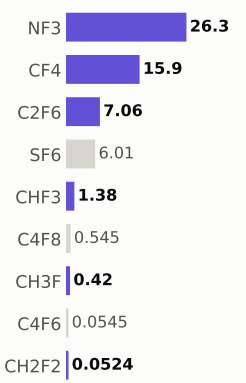

Step #22800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,454.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

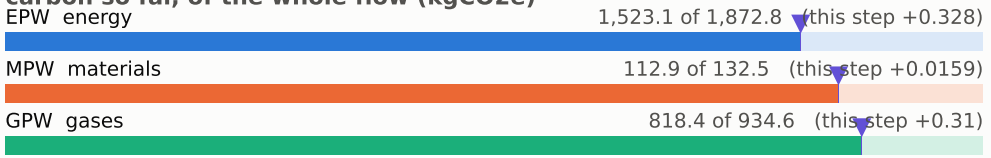

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

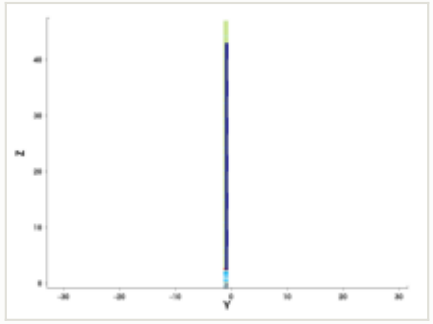

y cut at -1.035 µm

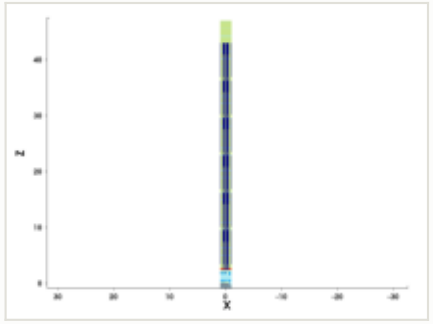

mask for this step

no mask for this step

steps by process area

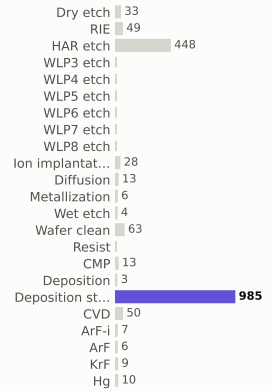

materials deposited (g)

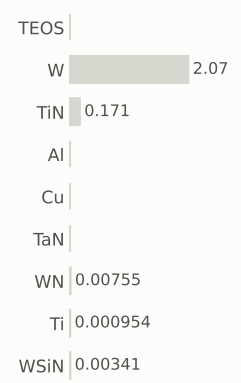

gases emitted (g)

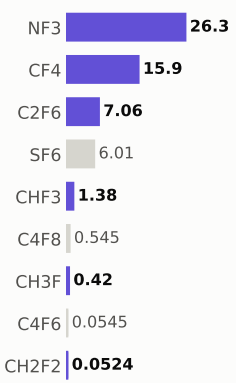

Step #22810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,455.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

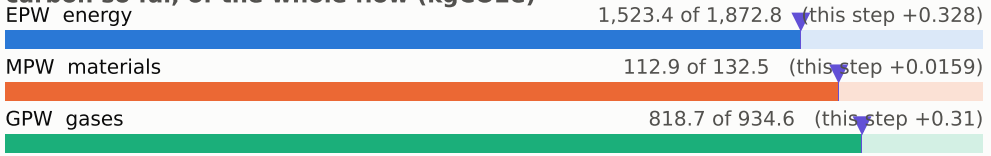

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

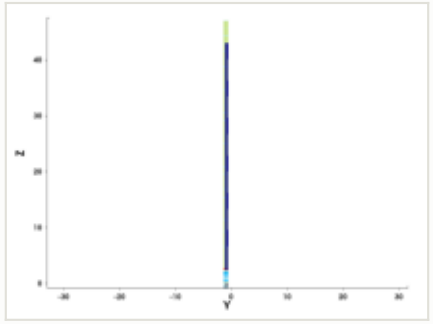

y cut at -1.035 µm

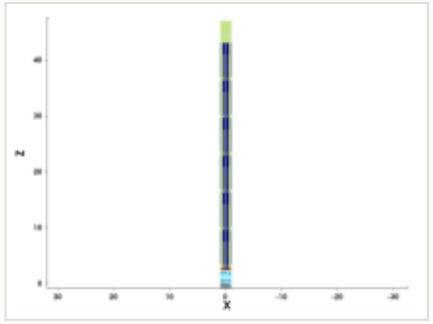

mask for this step

no mask for this step

steps by process area

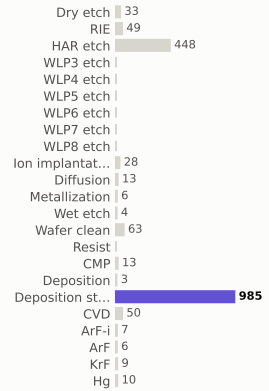

materials deposited (g)

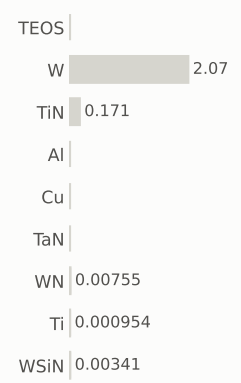

gases emitted (g)

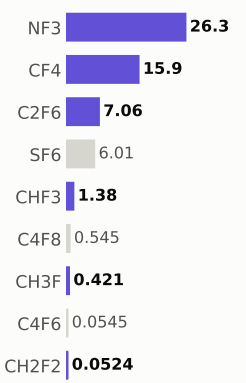

Step #22820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,455.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

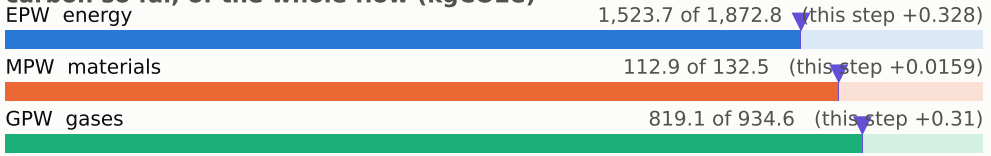

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

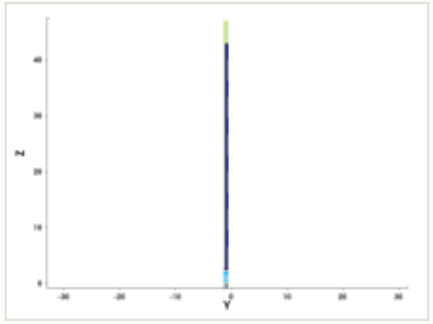

y cut at -1.035 µm

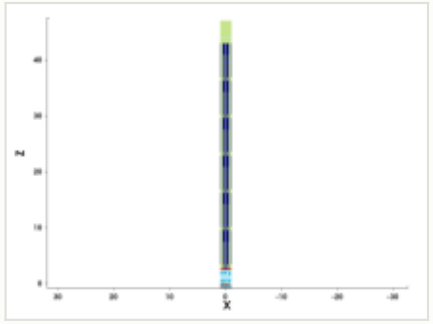

mask for this step

no mask for this step

steps by process area

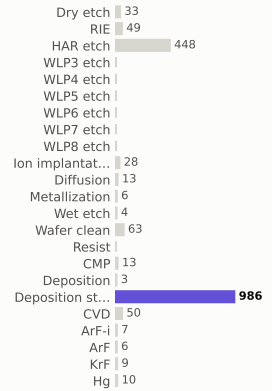

materials deposited (g)

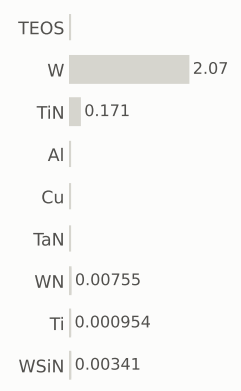

gases emitted (g)

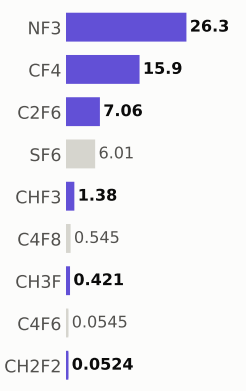

Step #22830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,456.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

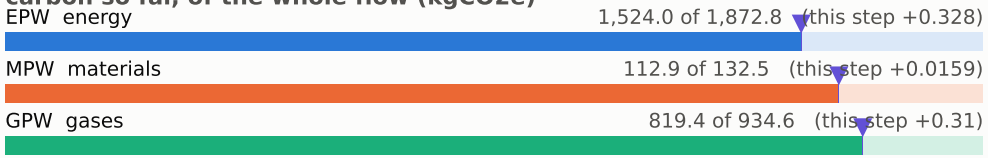

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

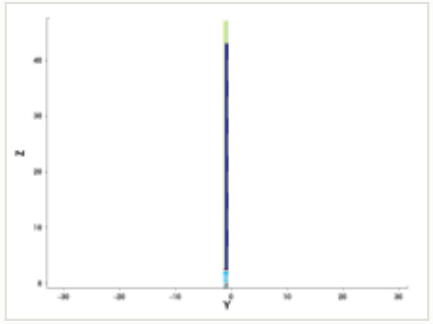

y cut at -1.035 µm

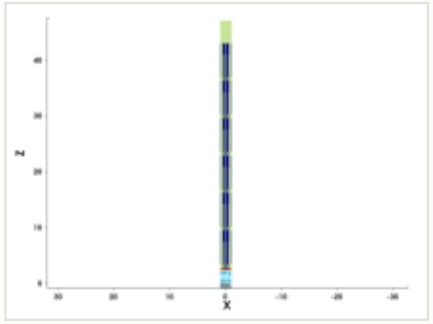

mask for this step

no mask for this step

steps by process area

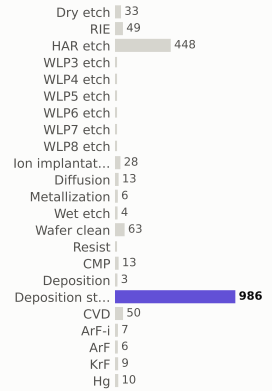

materials deposited (g)

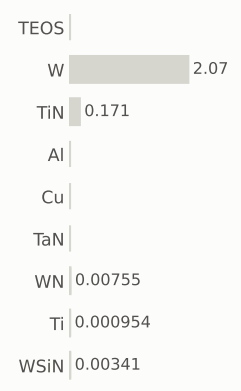

gases emitted (g)

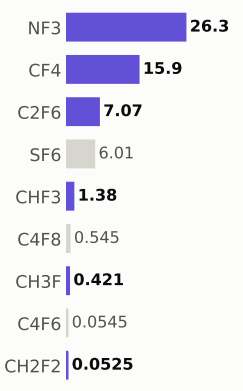

Step #22840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,457.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

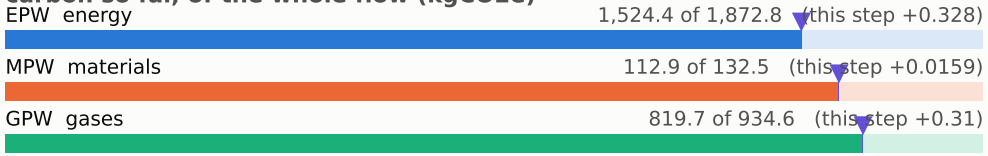

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

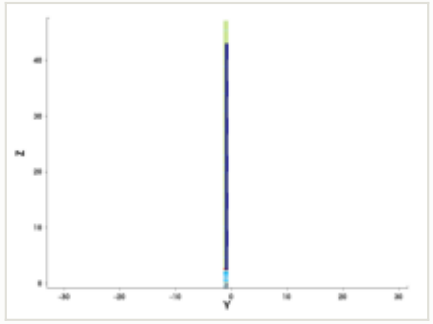

y cut at -1.035 µm

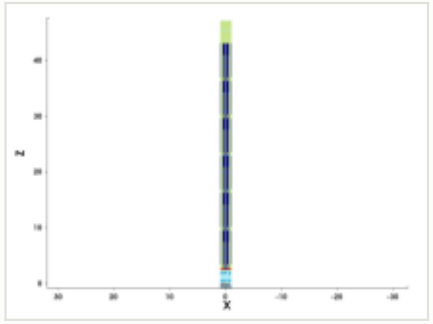

mask for this step

no mask for this step

steps by process area

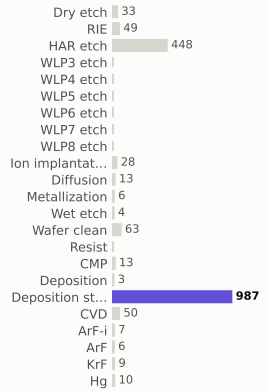

materials deposited (g)

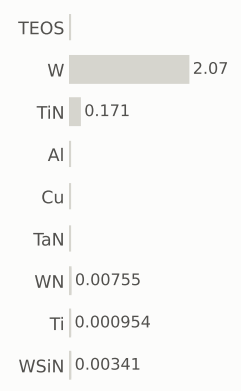

gases emitted (g)

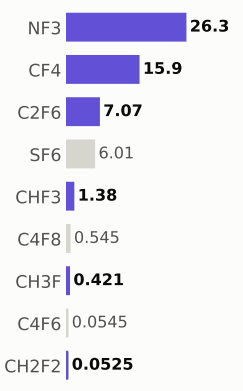

Step #22850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,457.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

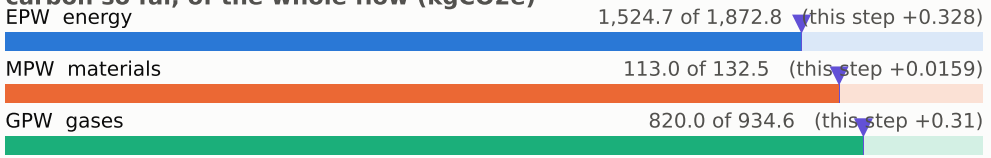

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

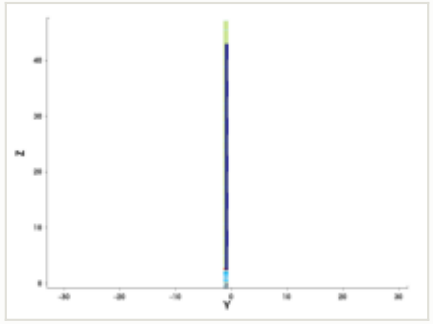

y cut at -1.035 µm

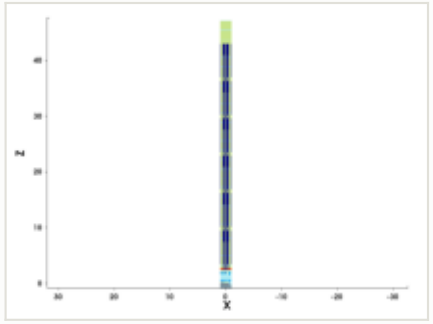

mask for this step

no mask for this step

steps by process area

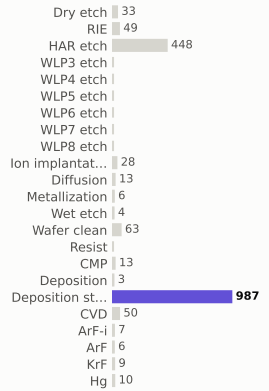

materials deposited (g)

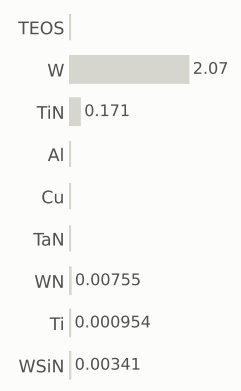

gases emitted (g)

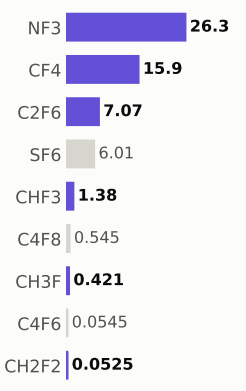

Step #22860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,458.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

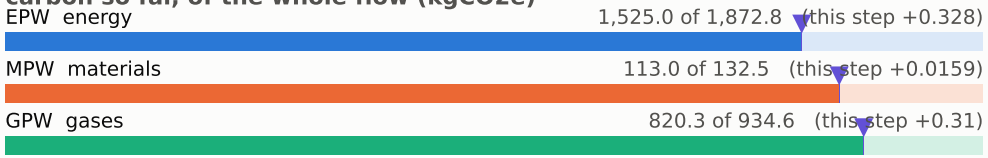

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

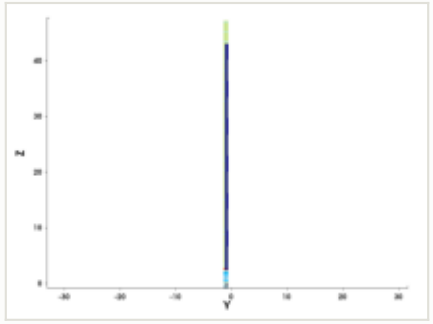

y cut at -1.035 µm

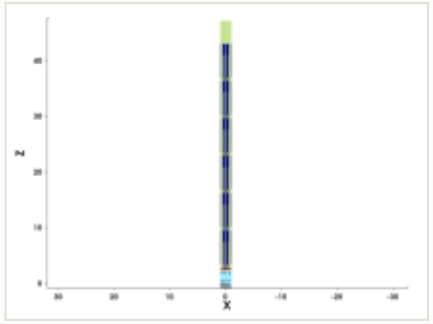

mask for this step

no mask for this step

steps by process area

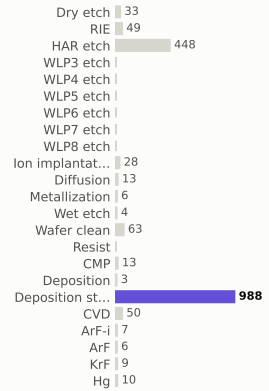

materials deposited (g)

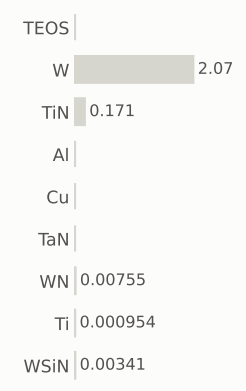

gases emitted (g)

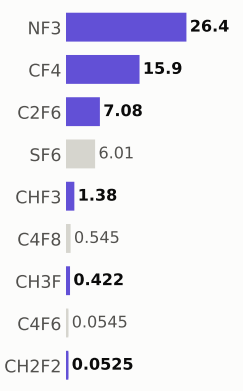

Step #22870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,458.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

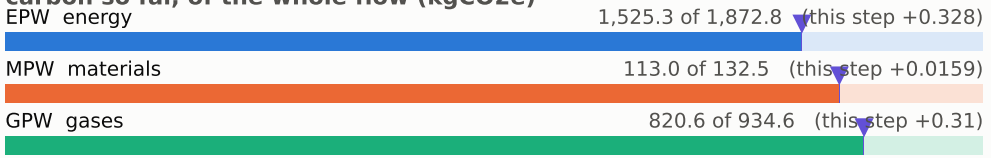

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

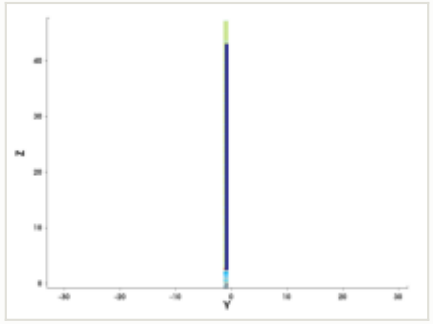

y cut at -1.035 µm

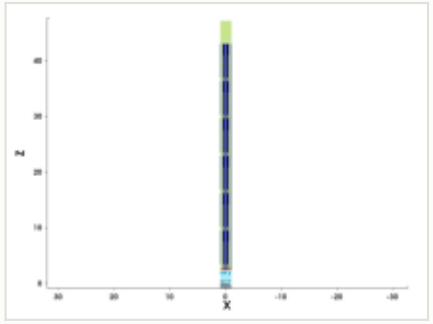

mask for this step

no mask for this step

steps by process area

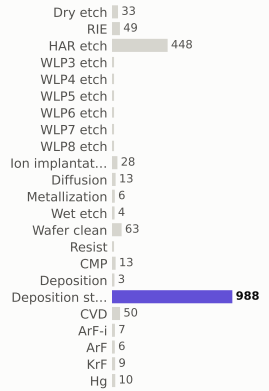

materials deposited (g)

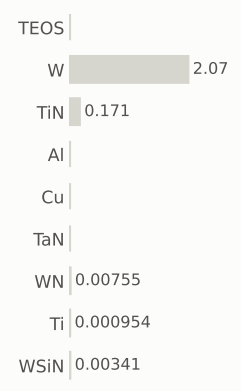

gases emitted (g)

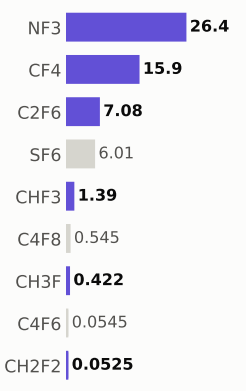

Step #22880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,459.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

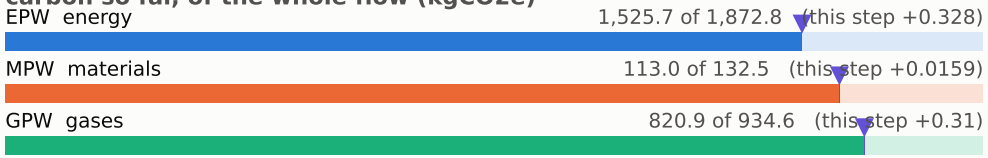

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

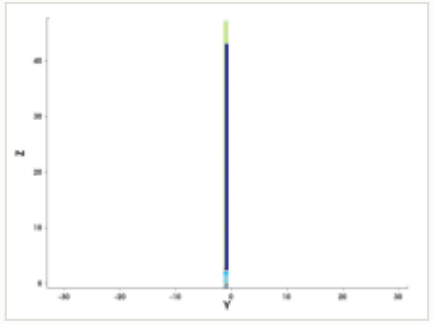

y cut at -1.035 µm

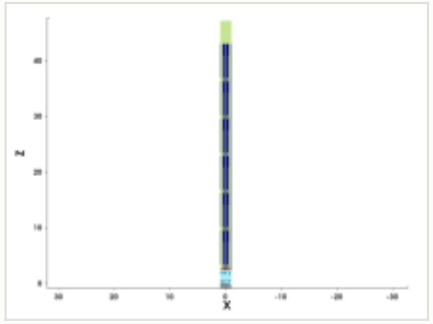

mask for this step

no mask for this step

steps by process area

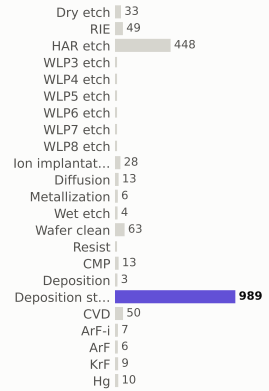

materials deposited (g)

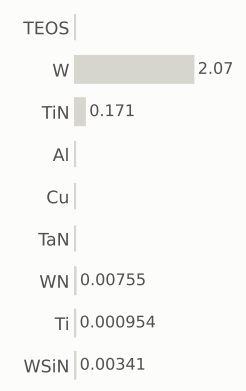

gases emitted (g)

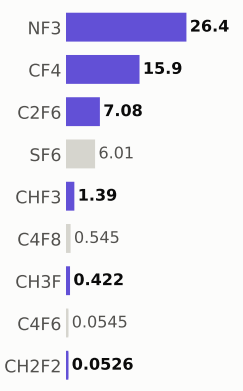

Step #22890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,460.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

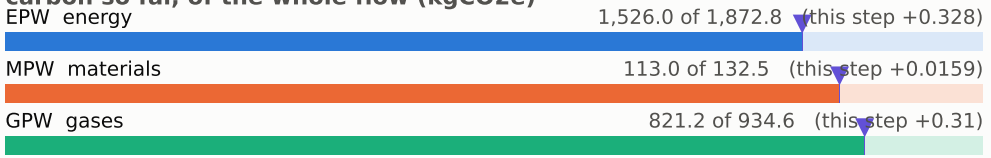

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

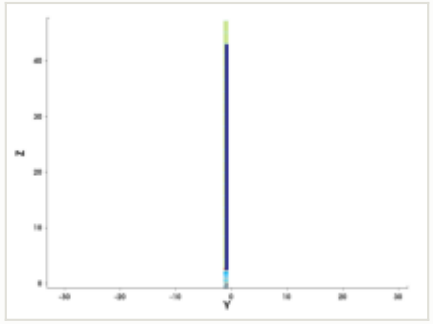

y cut at -1.035 µm

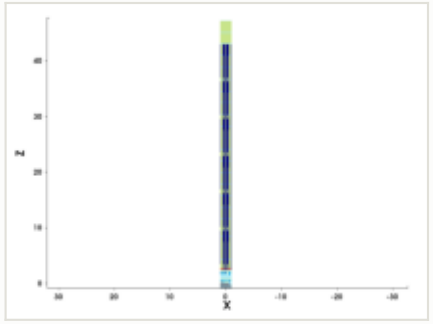

mask for this step

no mask for this step

steps by process area

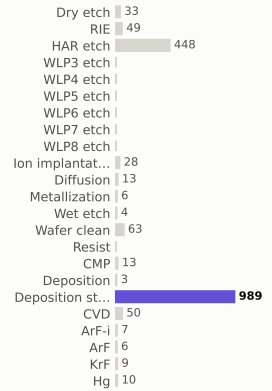

materials deposited (g)

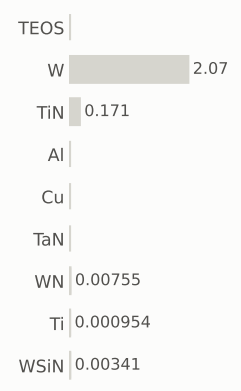

gases emitted (g)

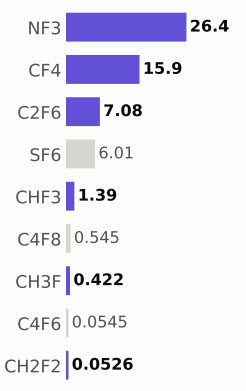

Step #22900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,460.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

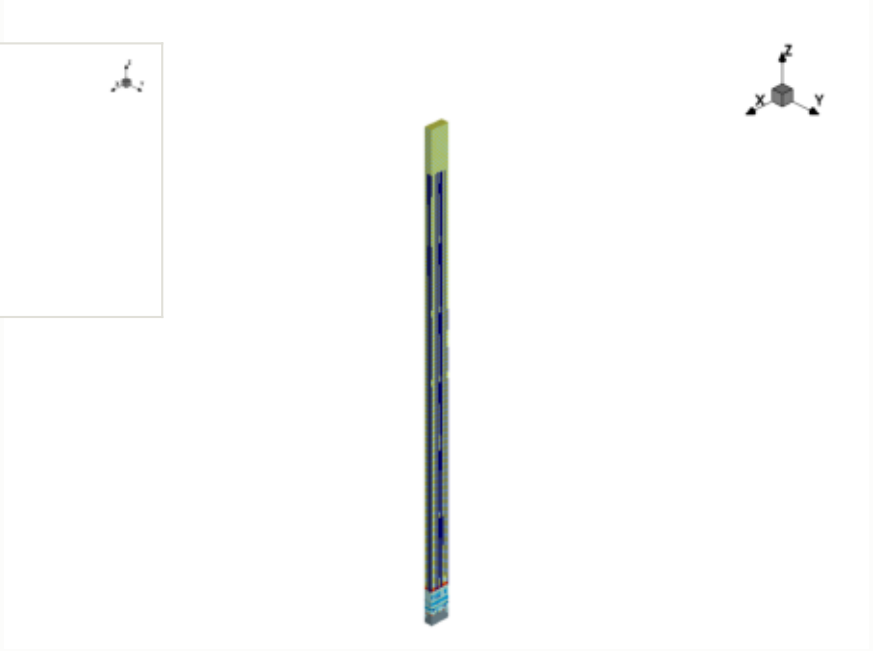

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

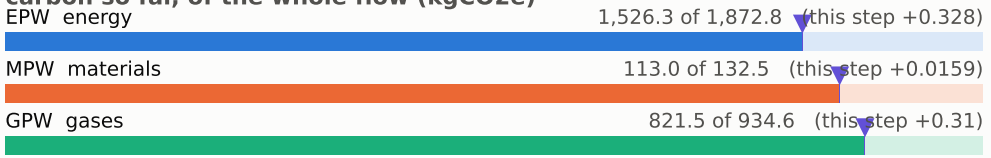

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

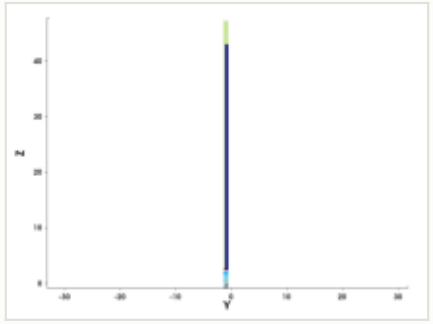

y cut at -1.035 µm

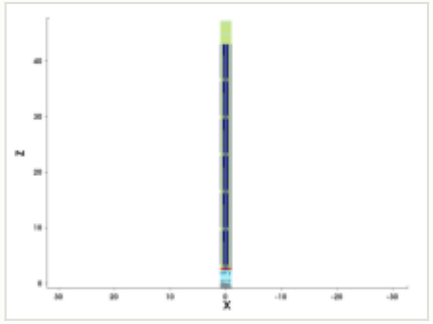

mask for this step

no mask for this step

steps by process area

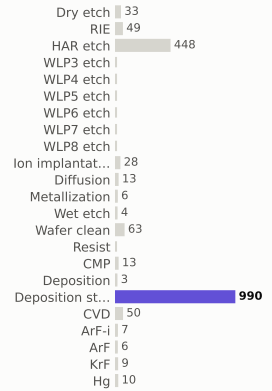

materials deposited (g)

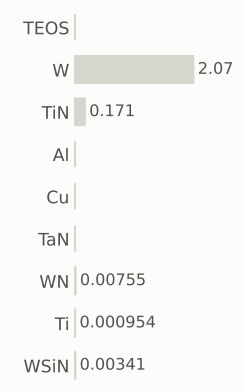

gases emitted (g)

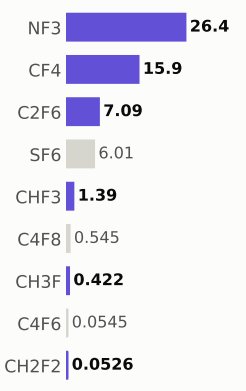

Step #22910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,461.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

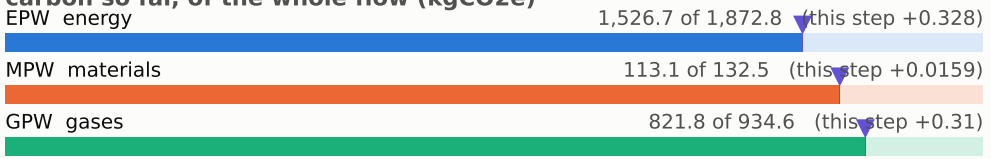

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

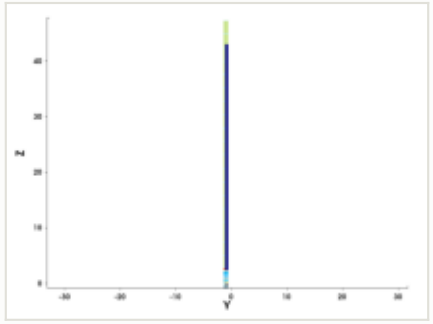

y cut at -1.035 µm

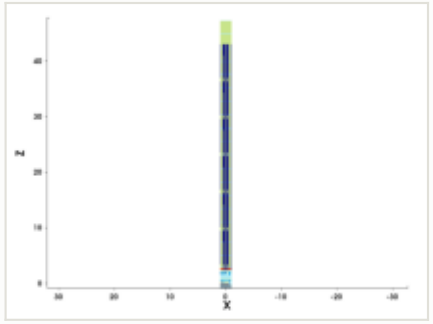

mask for this step

no mask for this step

steps by process area

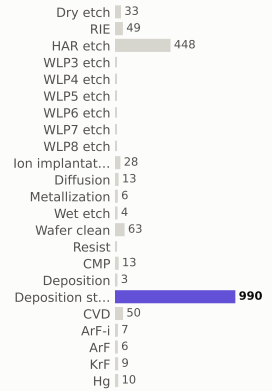

materials deposited (g)

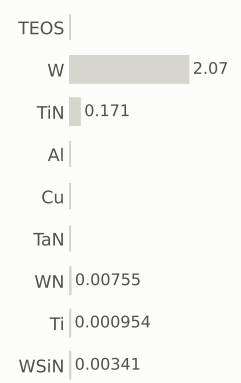

gases emitted (g)

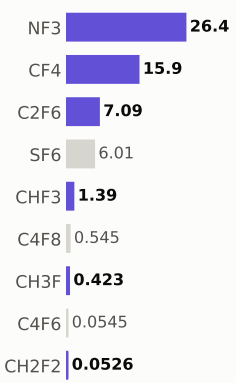

Step #22920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,462.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

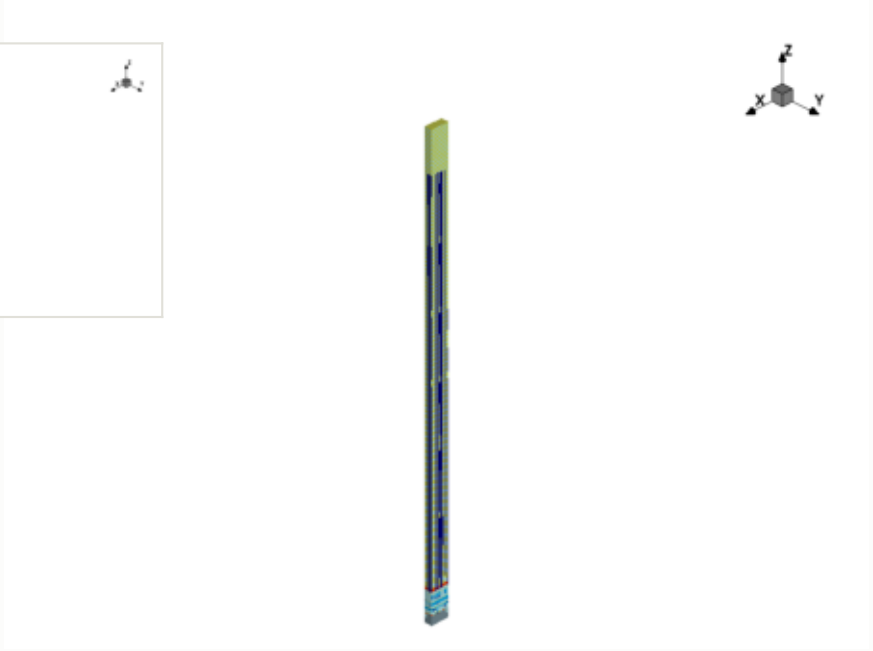

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

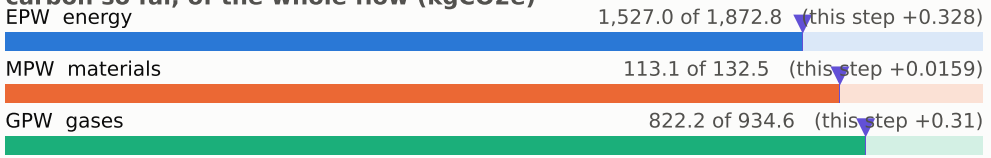

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

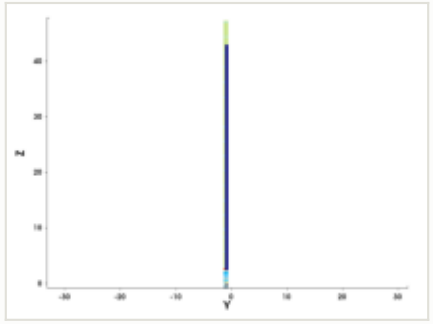

y cut at -1.035 µm

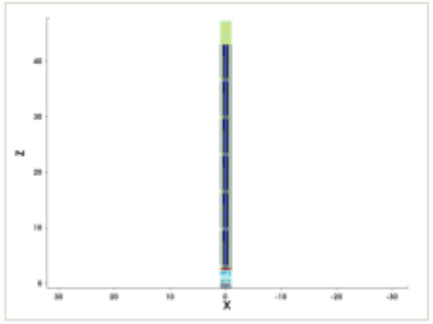

mask for this step

no mask for this step

steps by process area

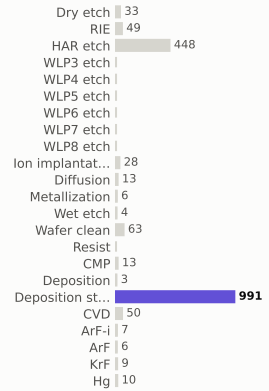

materials deposited (g)

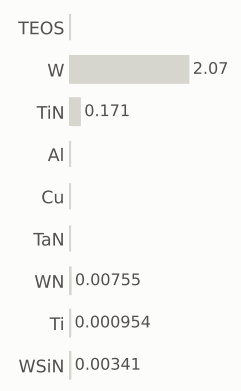

gases emitted (g)

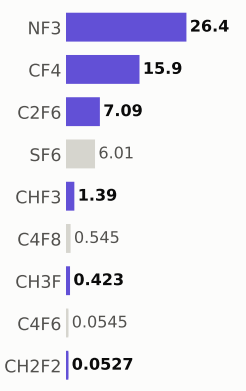

Step #22930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,462.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

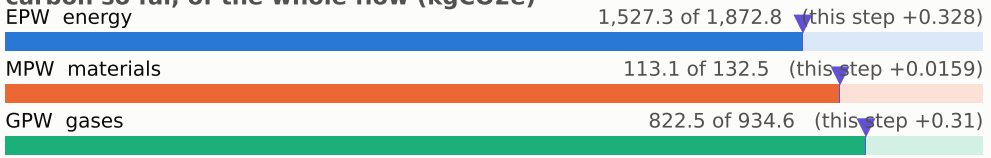

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

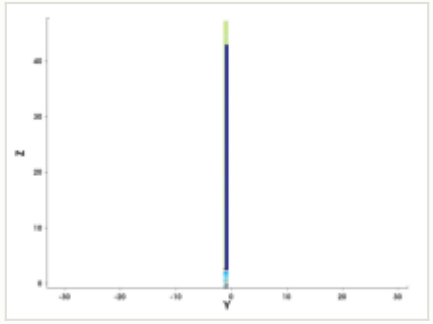

y cut at -1.035 µm

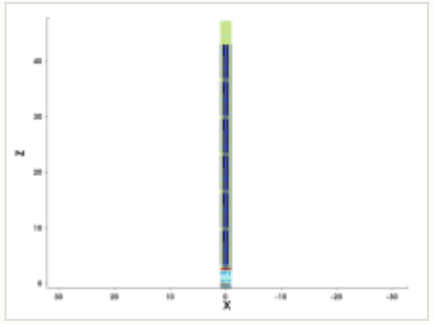

mask for this step

no mask for this step

steps by process area

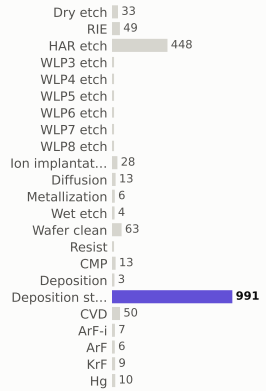

materials deposited (g)

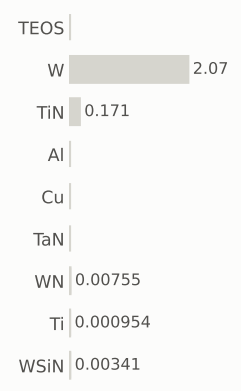

gases emitted (g)

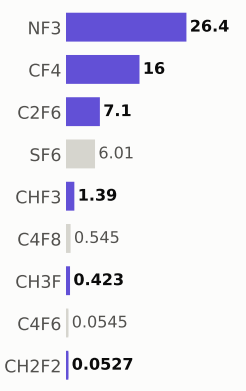

Step #22940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,463.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

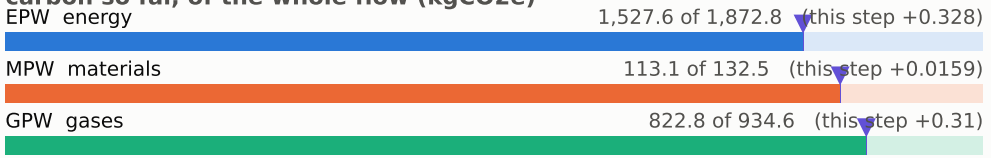

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

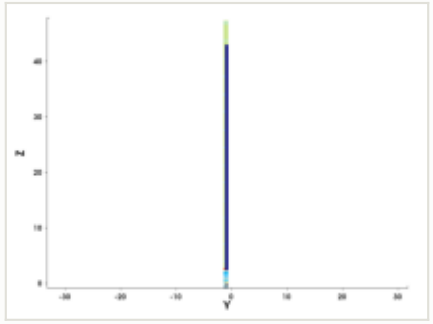

y cut at -1.035 µm

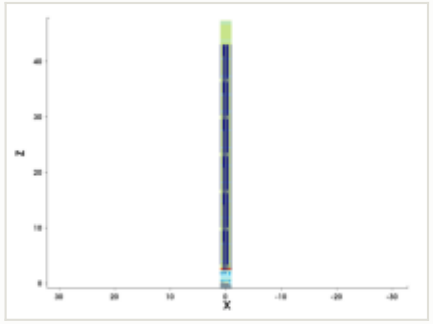

mask for this step

no mask for this step

steps by process area

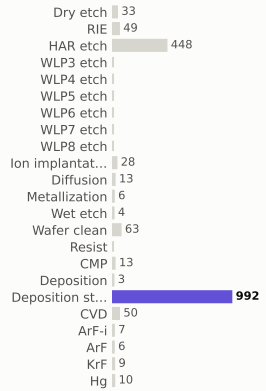

materials deposited (g)

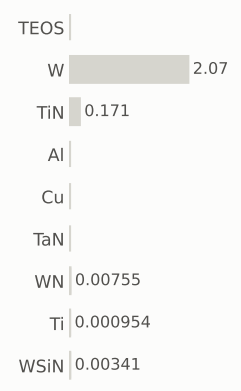

gases emitted (g)

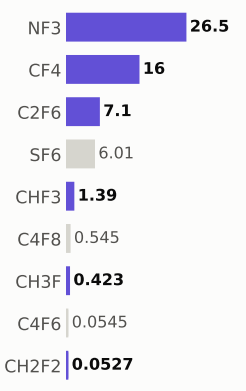

Step #22950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,464.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

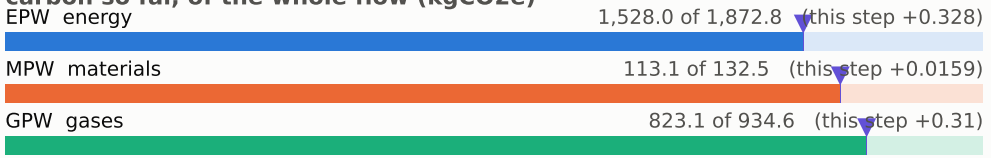

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

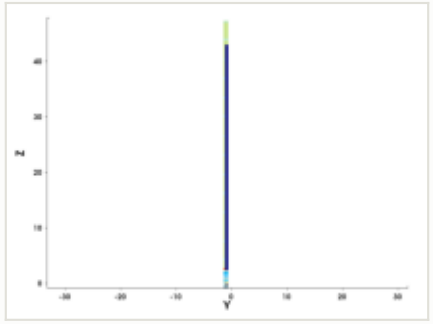

y cut at -1.035 µm

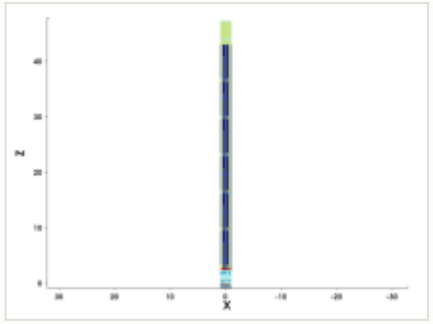

mask for this step

no mask for this step

steps by process area

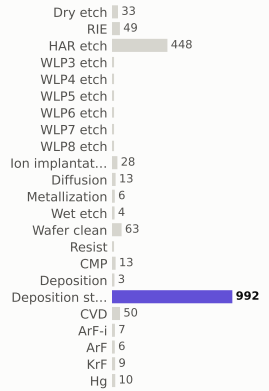

materials deposited (g)

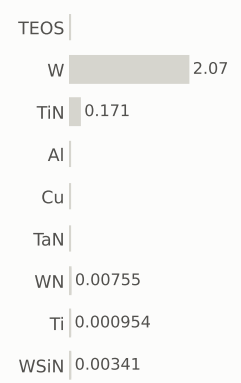

gases emitted (g)

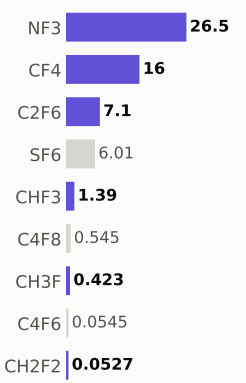

Step #22960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,464.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

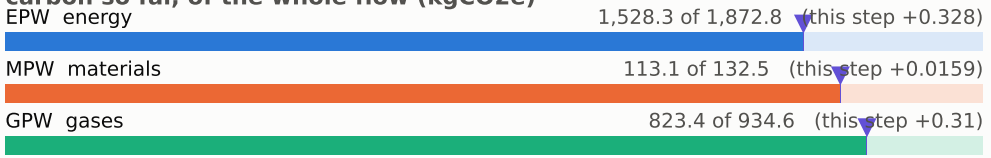

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

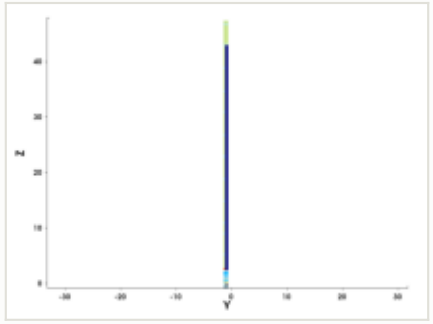

y cut at -1.035 µm

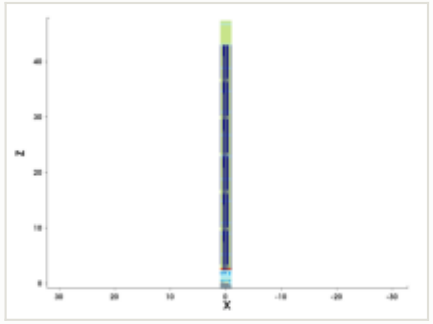

mask for this step

no mask for this step

steps by process area

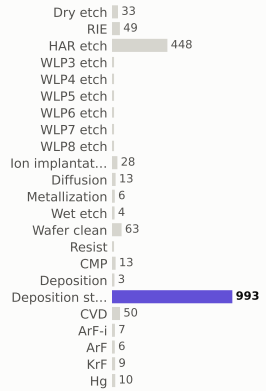

materials deposited (g)

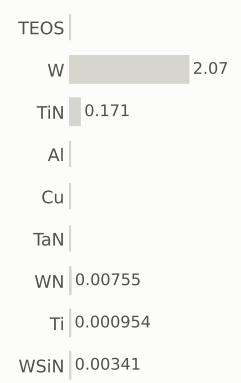

gases emitted (g)

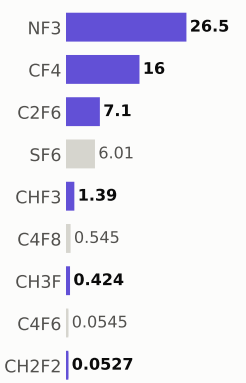

Step #22970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,465.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

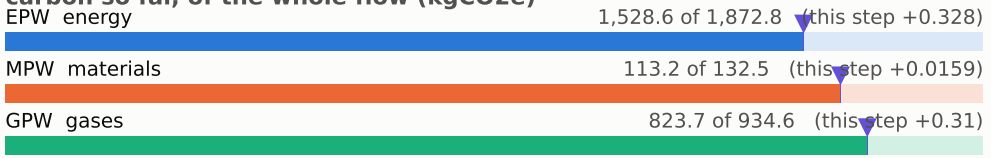

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

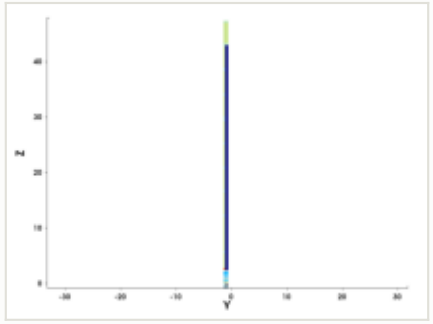

y cut at -1.035 µm

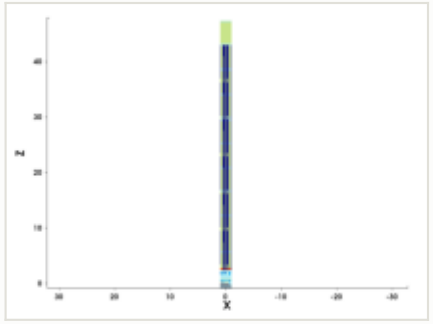

mask for this step

no mask for this step

steps by process area

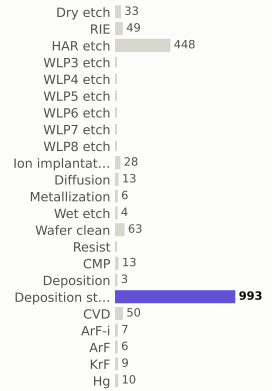

materials deposited (g)

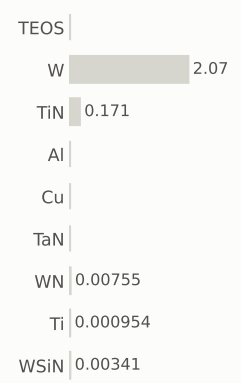

gases emitted (g)

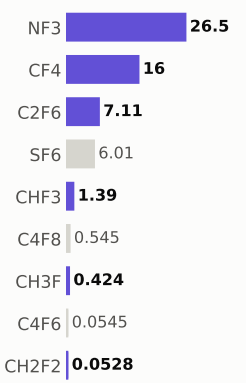

Step #22980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,466.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

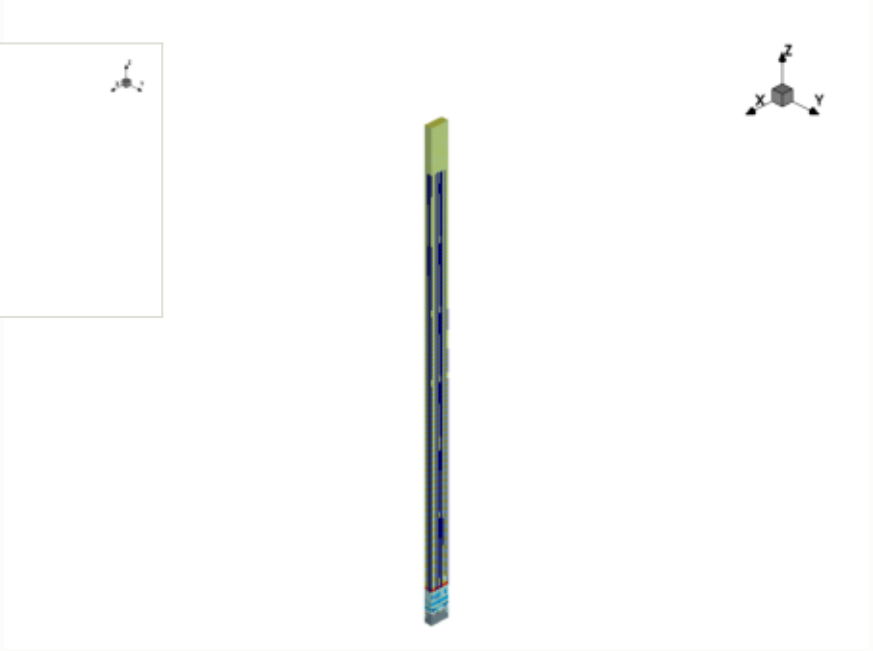

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

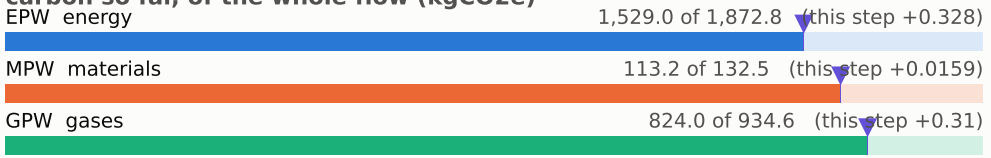

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

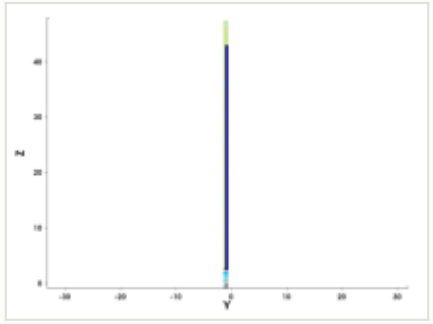

y cut at -1.035 µm

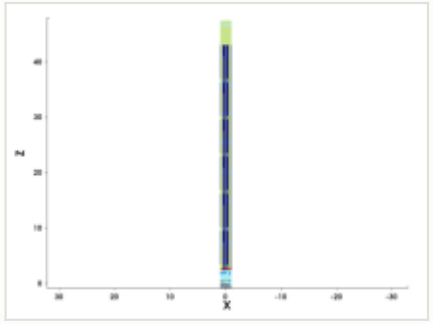

mask for this step

no mask for this step

steps by process area

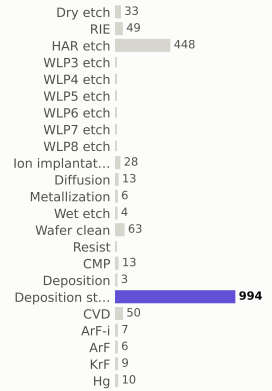

materials deposited (g)

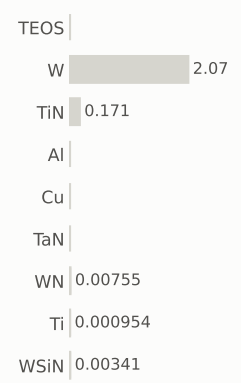

gases emitted (g)

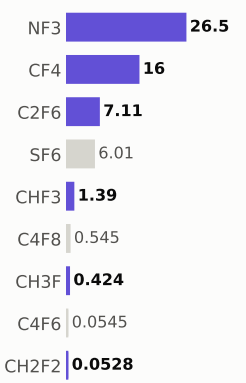

Step #22990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,466.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

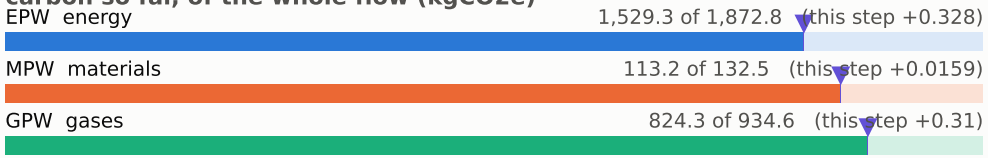

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

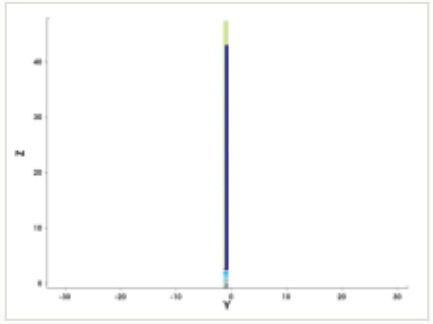

y cut at -1.035 µm

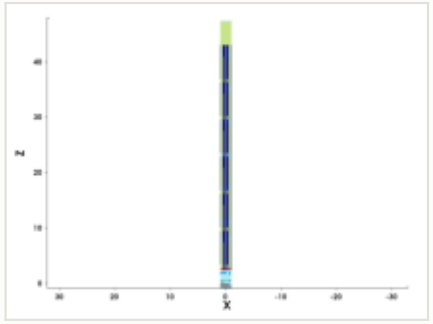

mask for this step

no mask for this step

steps by process area

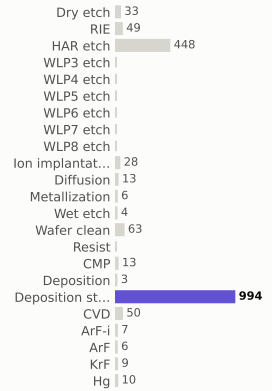

materials deposited (g)

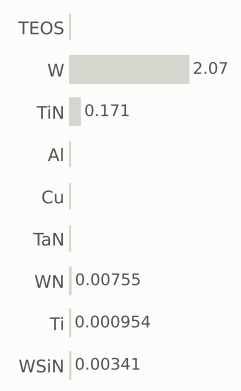

gases emitted (g)

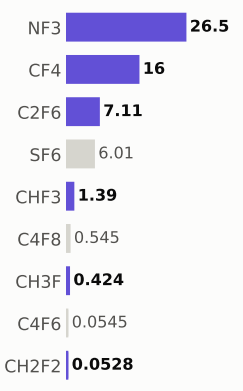

Step #23000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,467.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

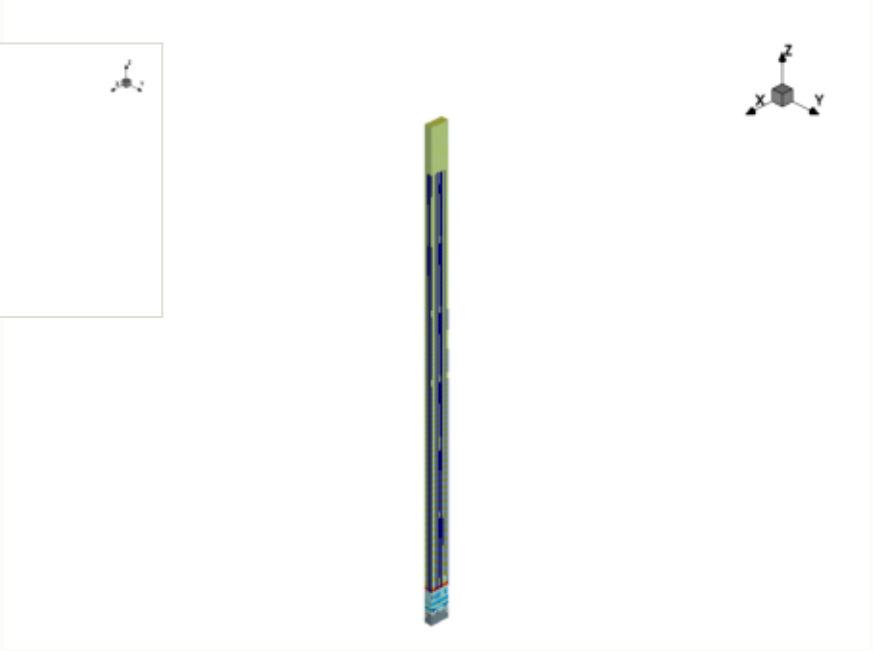

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

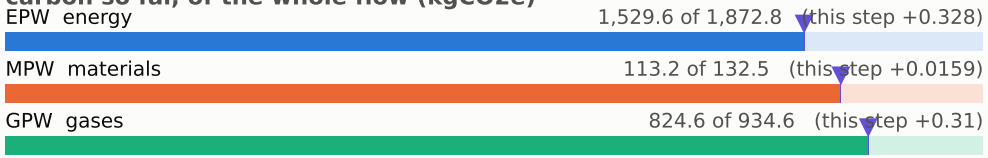

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

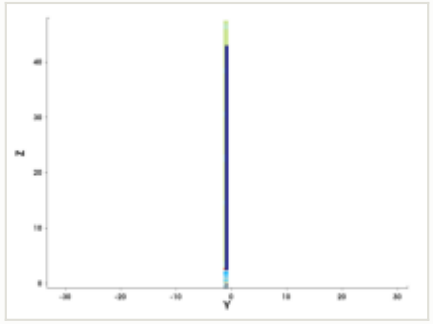

y cut at -1.035 µm

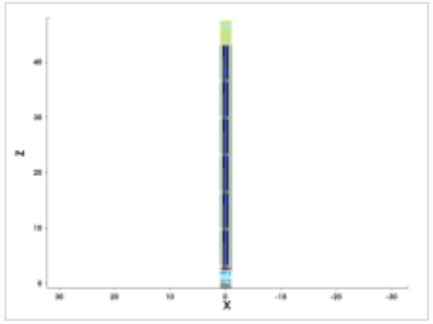

mask for this step

no mask for this step

steps by process area

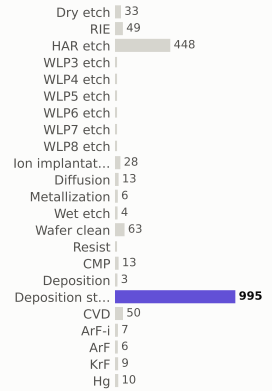

materials deposited (g)

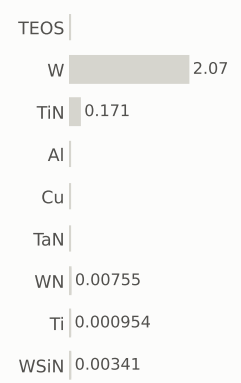

gases emitted (g)

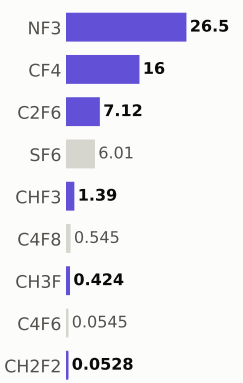

Step #23010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,468.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

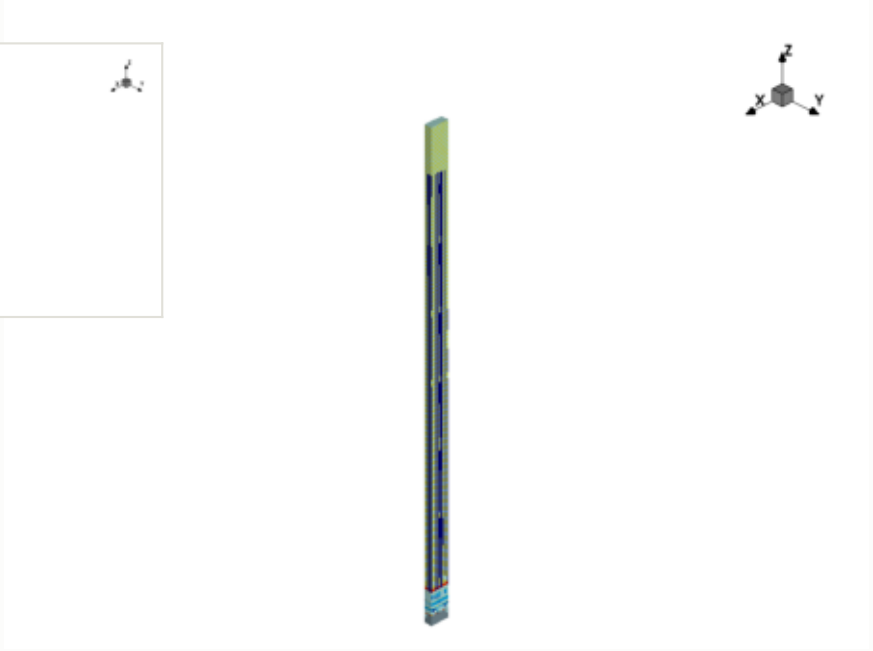

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

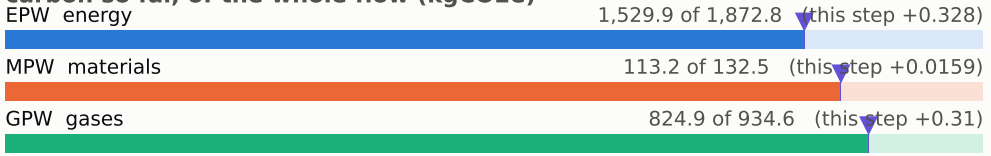

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

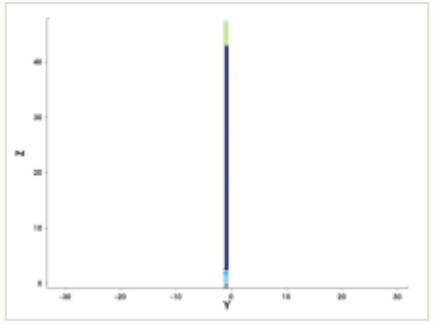

y cut at -1.035 µm

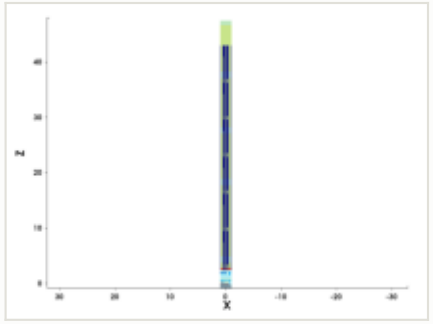

mask for this step

no mask for this step

steps by process area

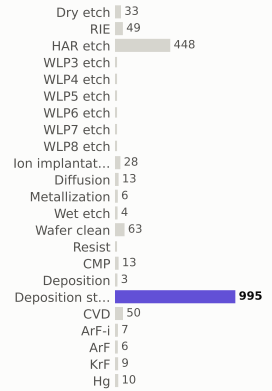

materials deposited (g)

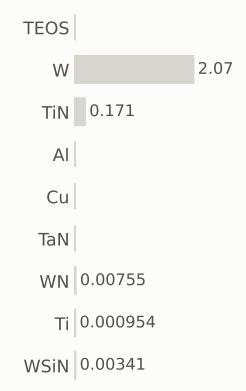

gases emitted (g)

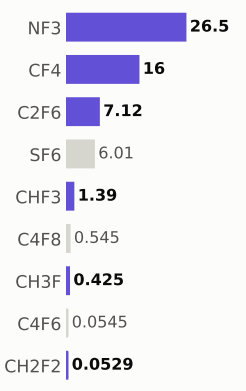

Step #23020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,468.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

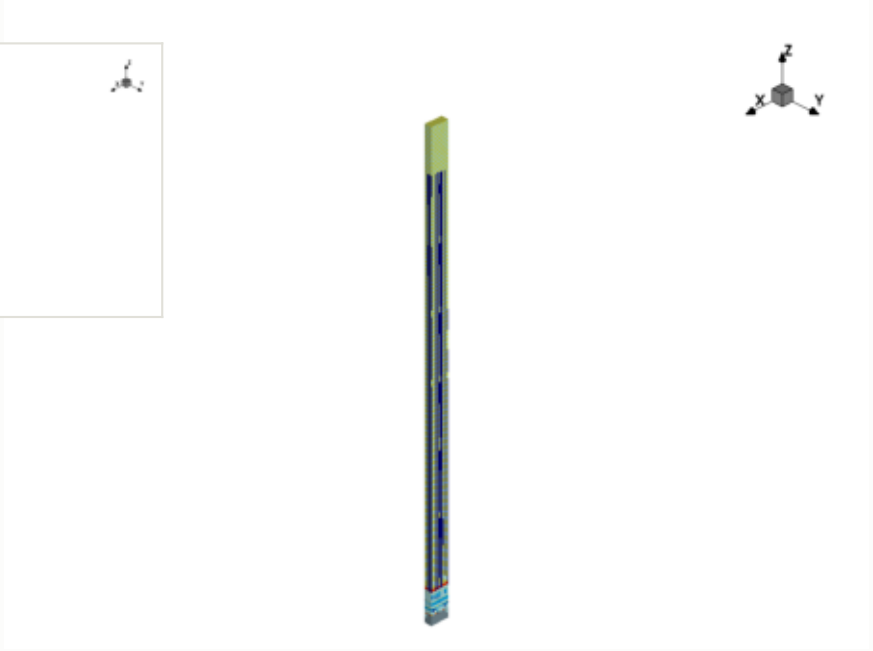

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

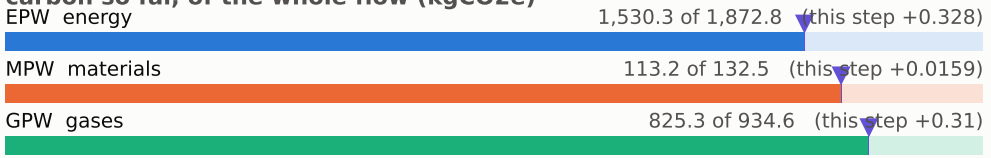

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

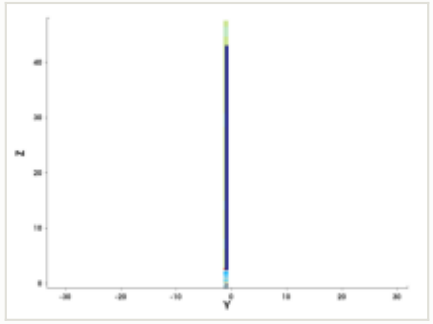

y cut at -1.035 µm

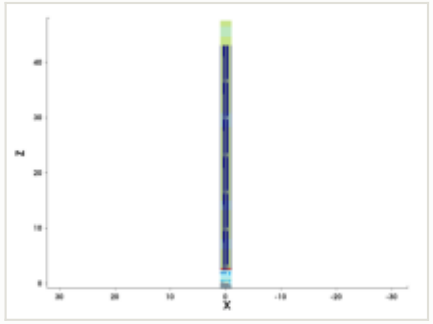

mask for this step

no mask for this step

steps by process area

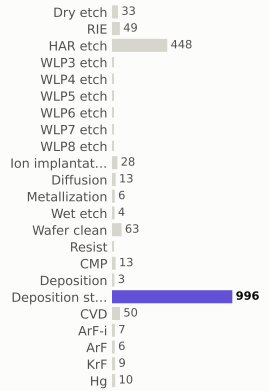

materials deposited (g)

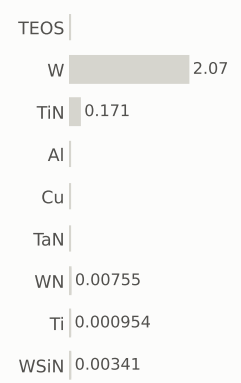

gases emitted (g)

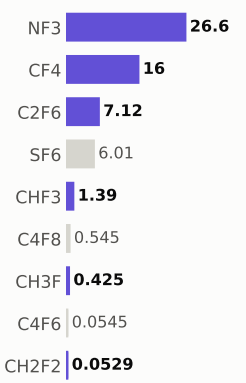

Step #23030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,469.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

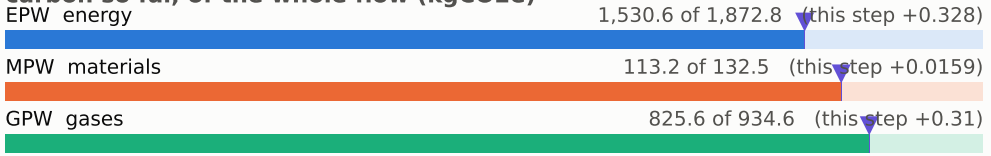

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

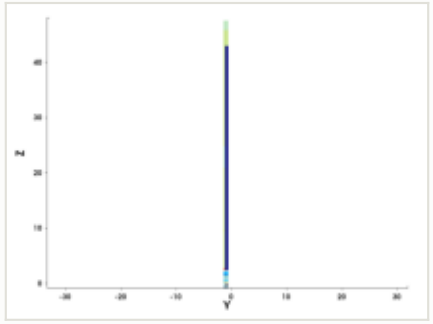

y cut at -1.035 µm

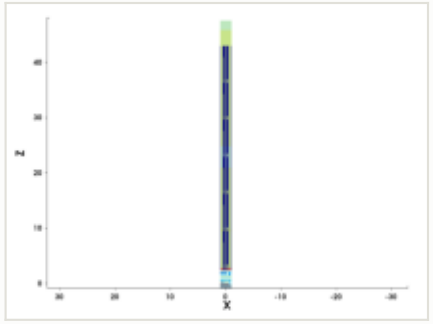

mask for this step

no mask for this step

steps by process area

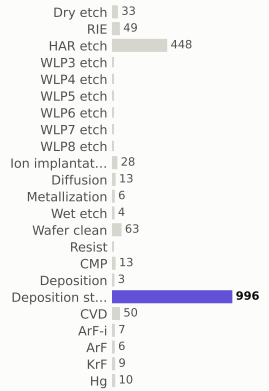

materials deposited (g)

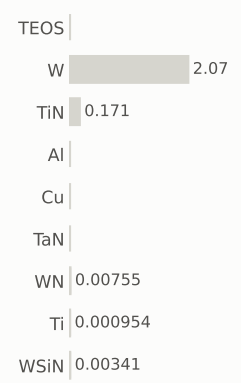

gases emitted (g)

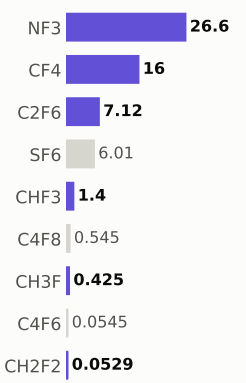

Step #23040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,470.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

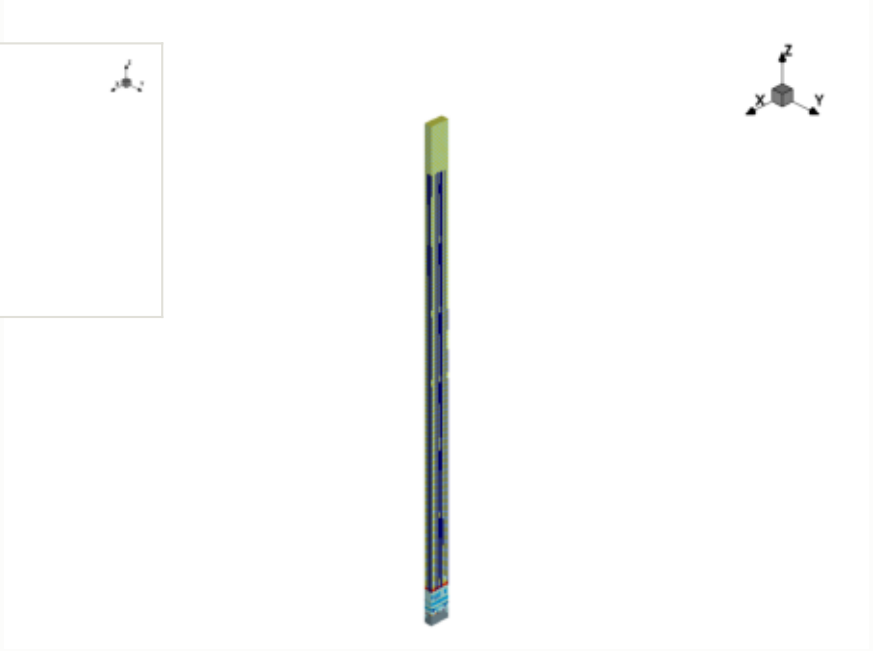

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

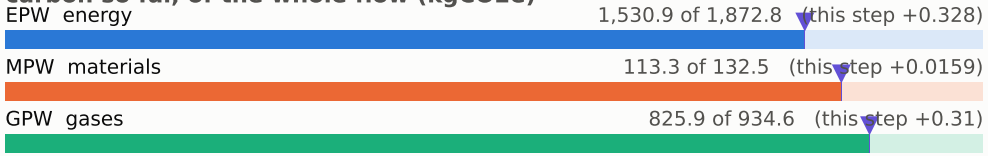

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

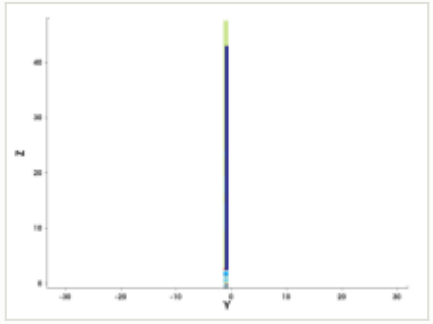

y cut at -1.035 µm

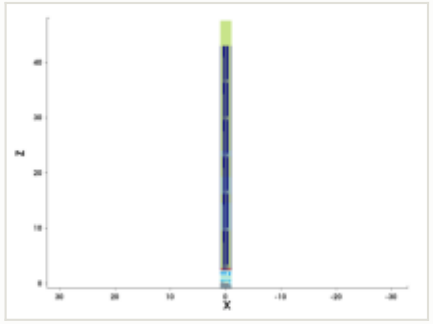

mask for this step

no mask for this step

steps by process area

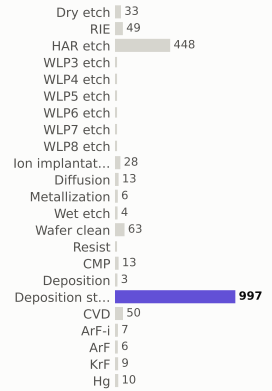

materials deposited (g)

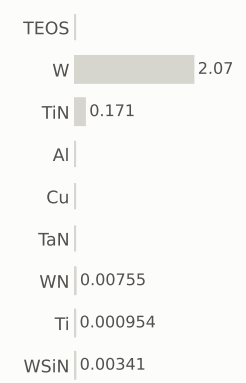

gases emitted (g)

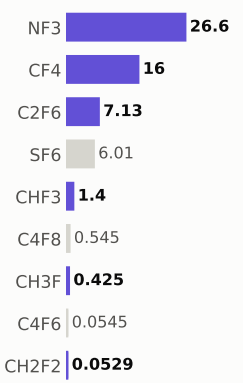

Step #23050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,470.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

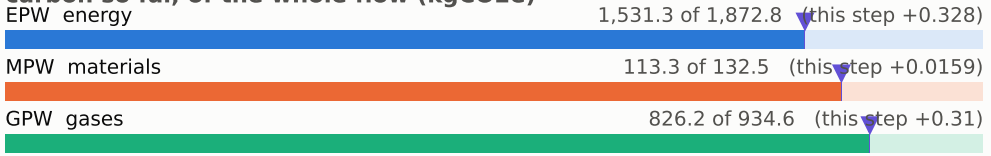

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

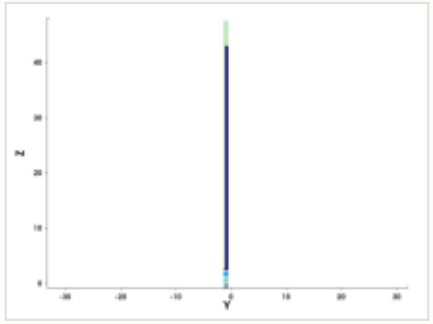

y cut at -1.035 µm

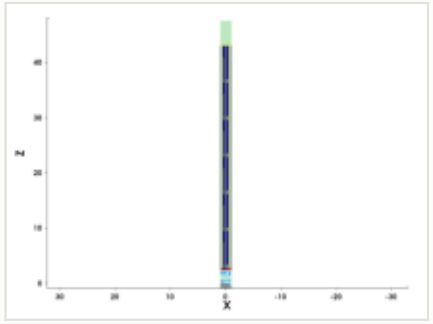

mask for this step

no mask for this step

steps by process area

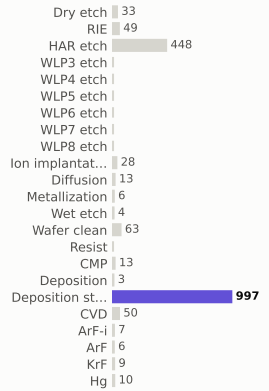

materials deposited (g)

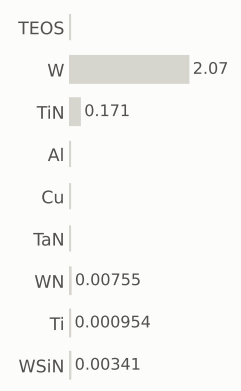

gases emitted (g)

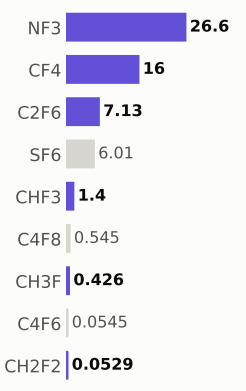

Step #23060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,471.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

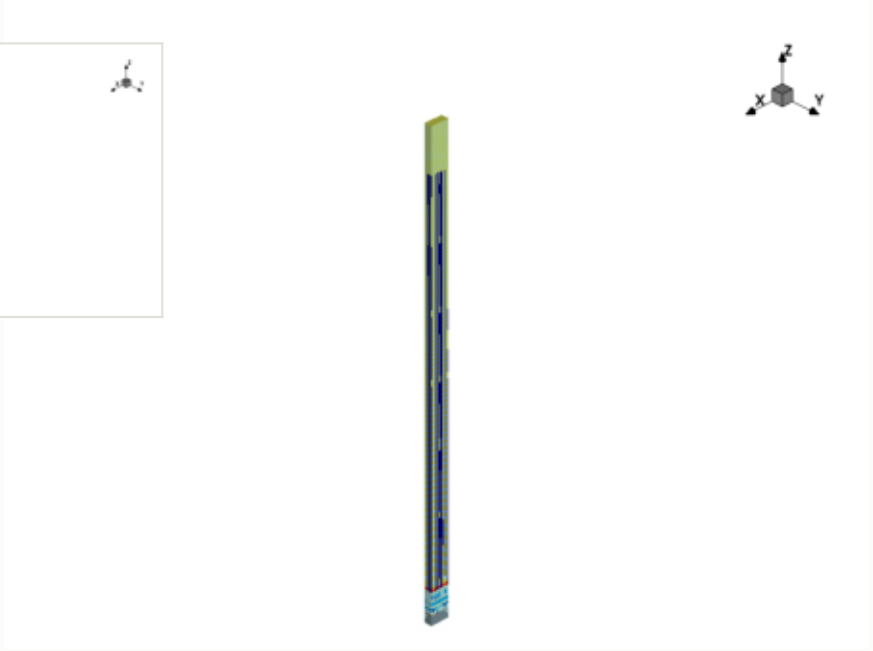

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

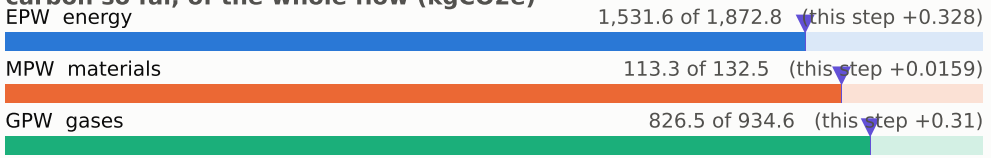

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

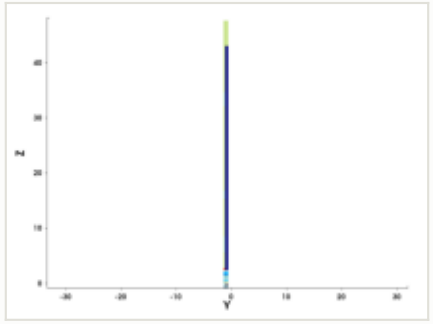

y cut at -1.035 µm

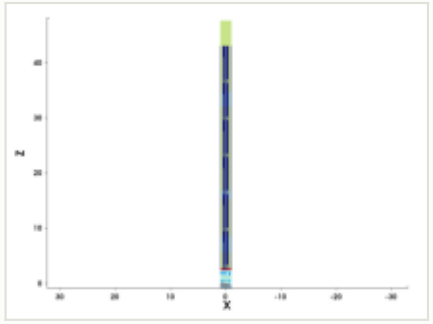

mask for this step

no mask for this step

steps by process area

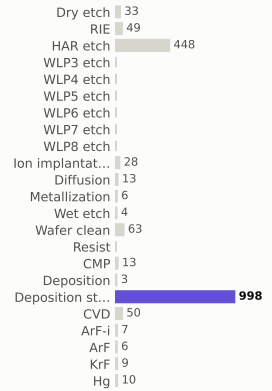

materials deposited (g)

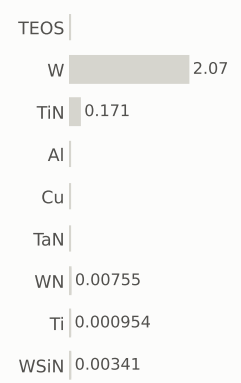

gases emitted (g)

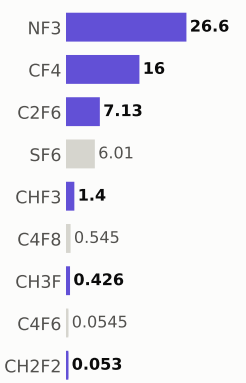

Step #23070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,472.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

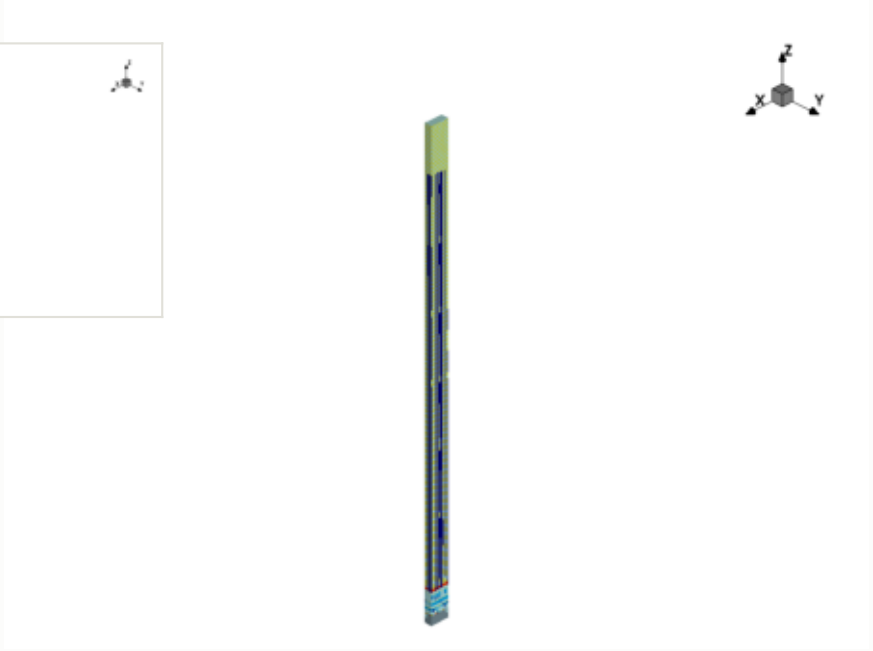

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

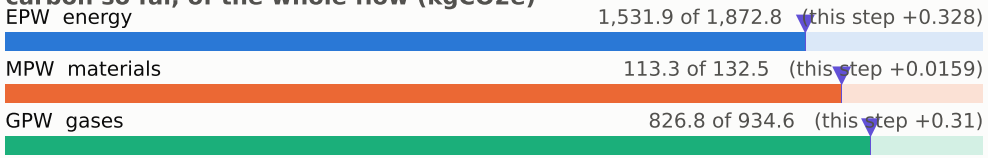

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

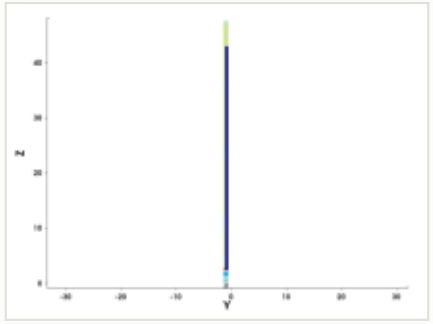

y cut at -1.035 µm

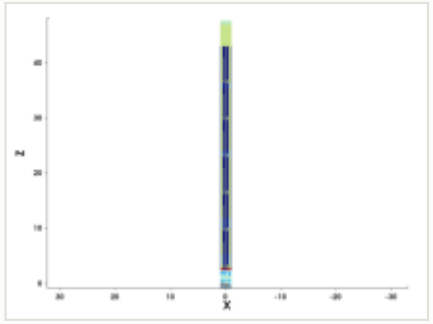

mask for this step

no mask for this step

steps by process area

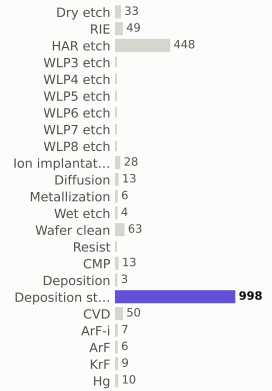

materials deposited (g)

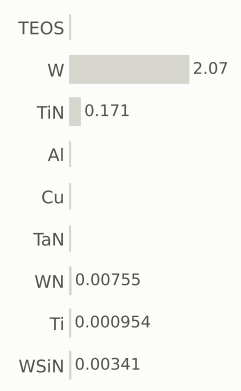

gases emitted (g)

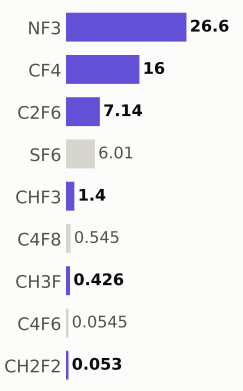

Step #23080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,472.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

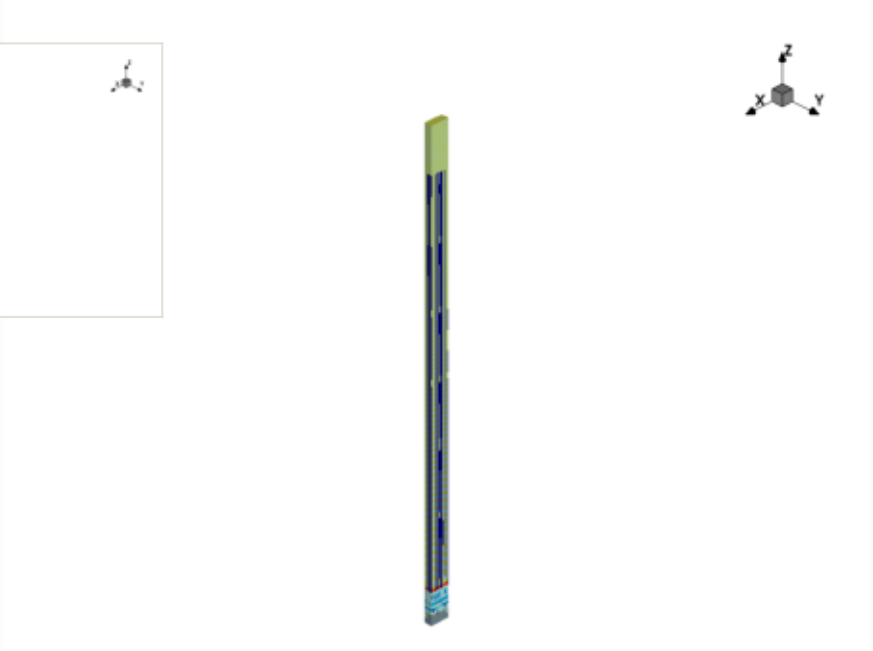

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

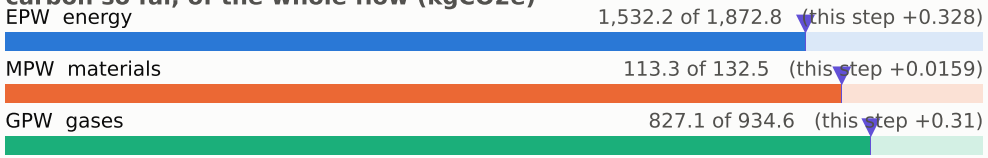

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

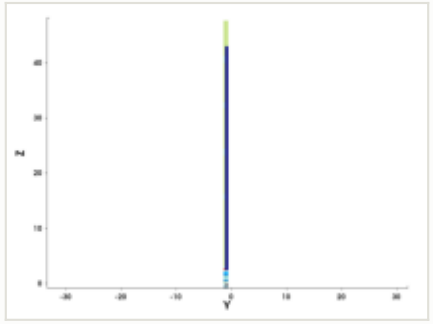

y cut at -1.035 µm

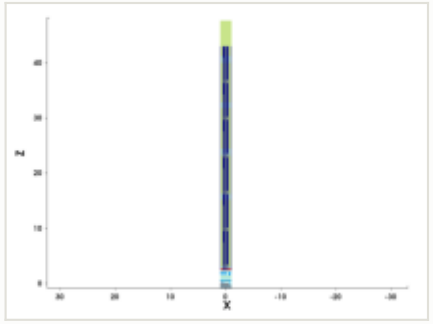

mask for this step

no mask for this step

steps by process area

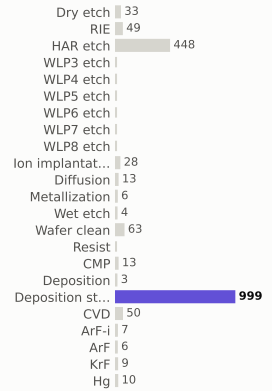

materials deposited (g)

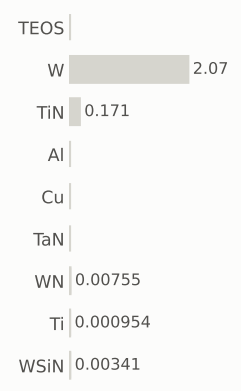

gases emitted (g)

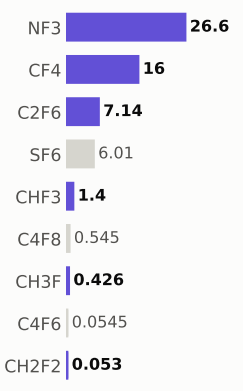

Step #23090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,473.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

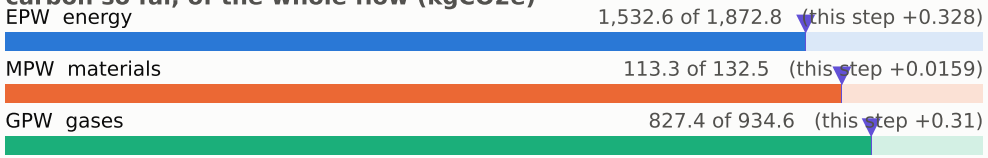

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

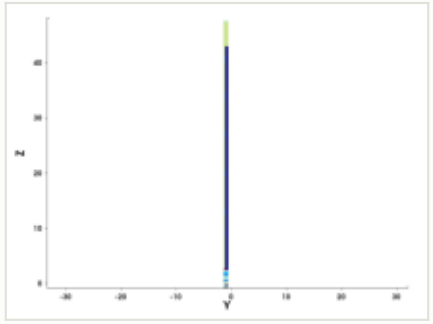

y cut at -1.035 µm

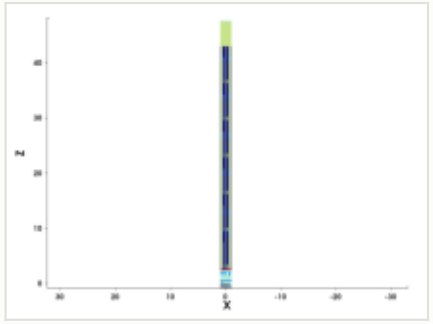

mask for this step

no mask for this step

steps by process area

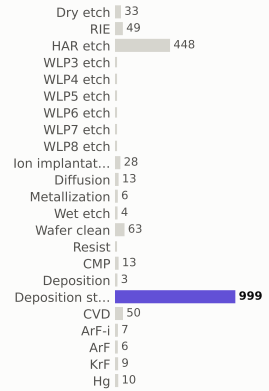

materials deposited (g)

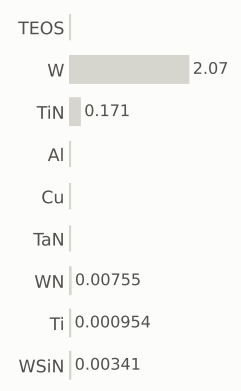

gases emitted (g)

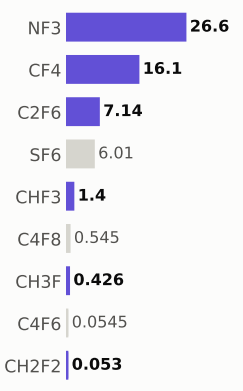

Step #23100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,474.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

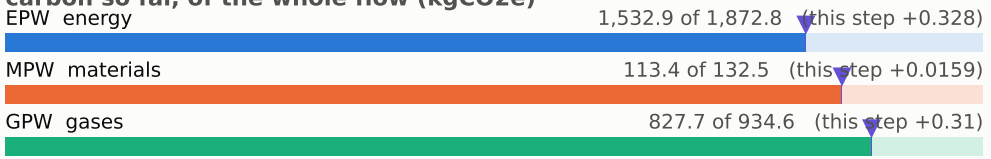

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

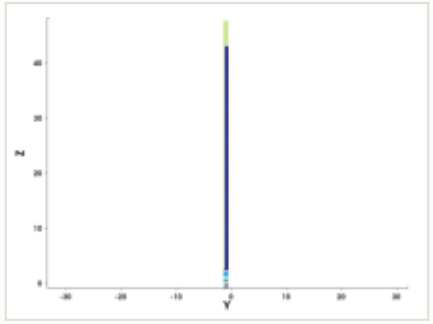

y cut at -1.035 µm

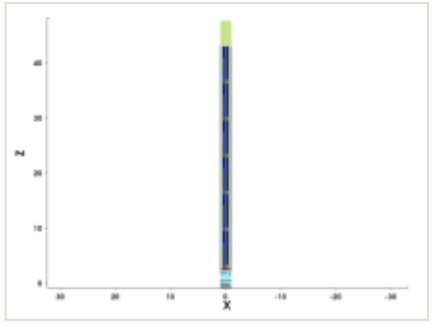

mask for this step

no mask for this step

steps by process area

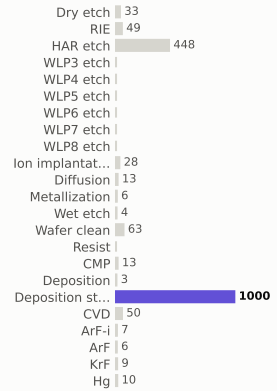

materials deposited (g)

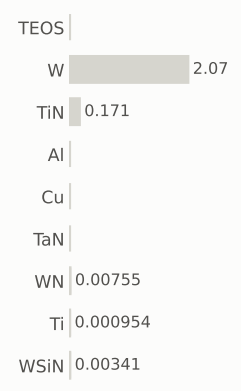

gases emitted (g)

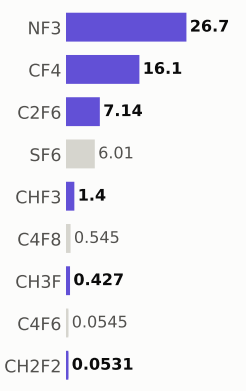

Step #23110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,474.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

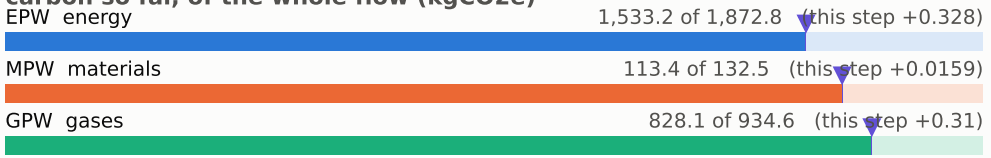

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

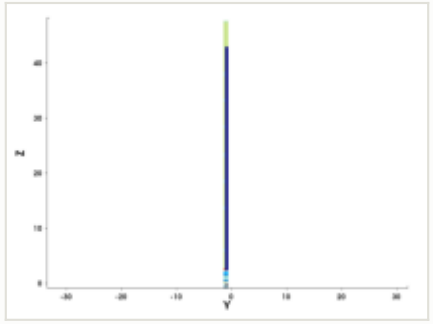

y cut at -1.035 µm

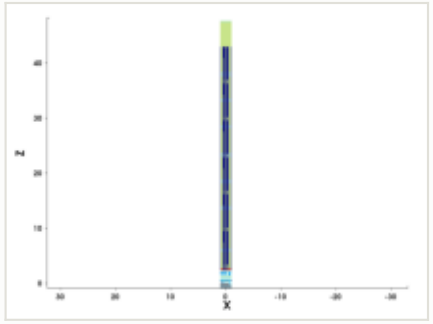

mask for this step

no mask for this step

steps by process area

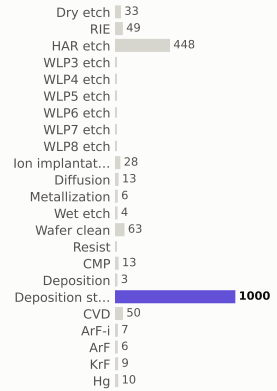

materials deposited (g)

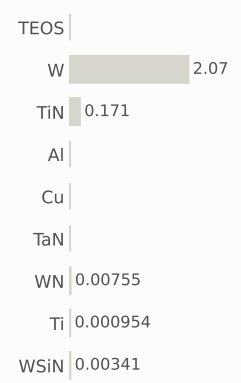

gases emitted (g)

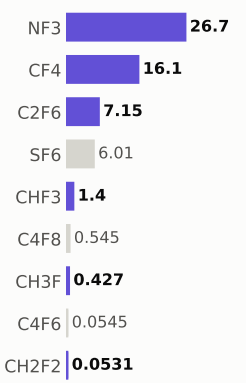

Step #23120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,475.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

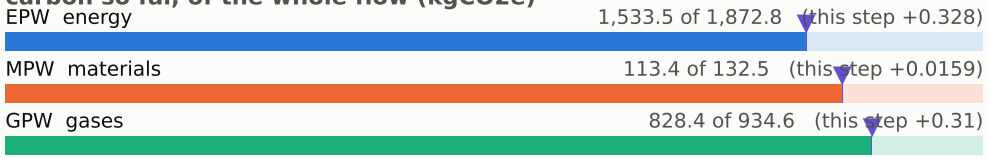

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

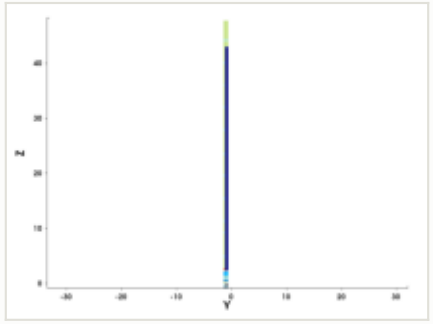

y cut at -1.035 µm

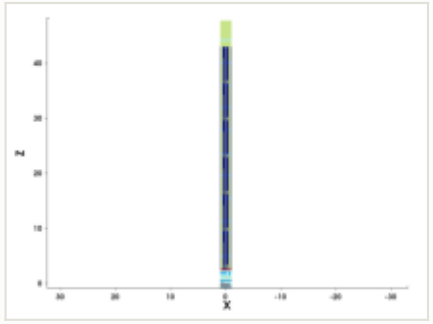

mask for this step

no mask for this step

steps by process area

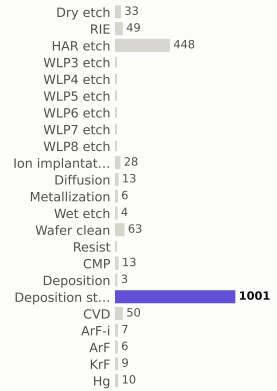

materials deposited (g)

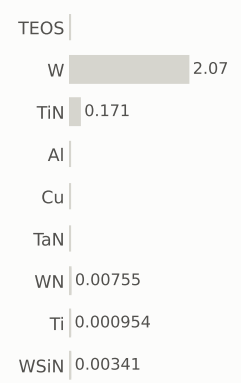

gases emitted (g)

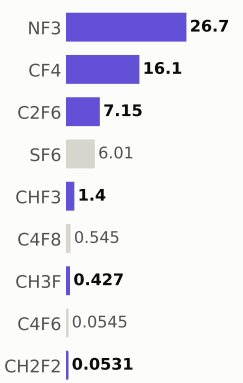

Step #23130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,476.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

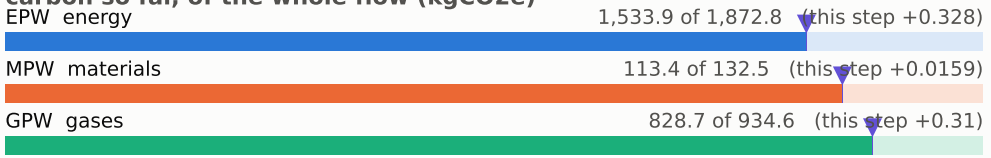

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

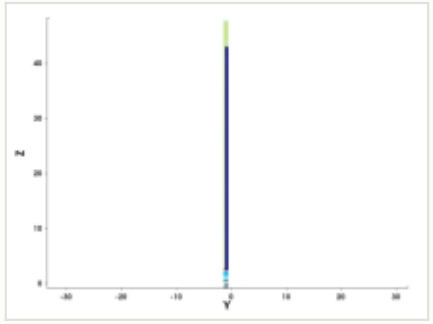

y cut at -1.035 µm

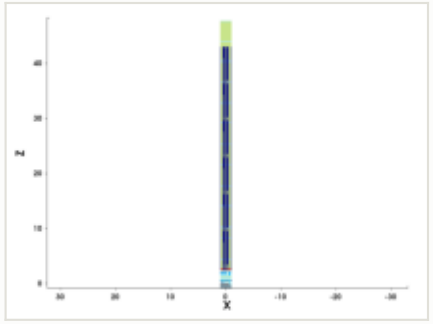

mask for this step

no mask for this step

steps by process area

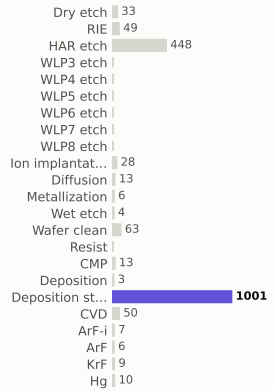

materials deposited (g)

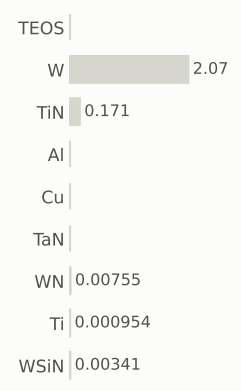

gases emitted (g)

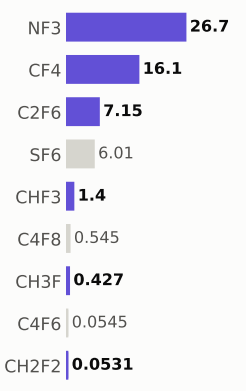

Step #23140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,476.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

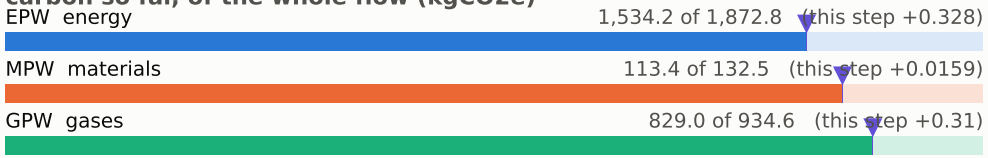

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

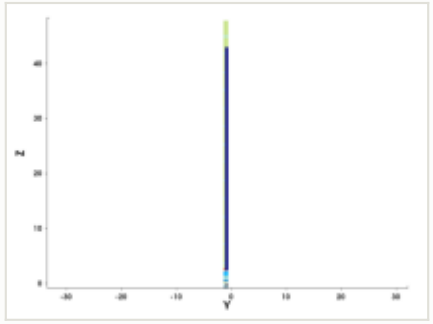

y cut at -1.035 µm

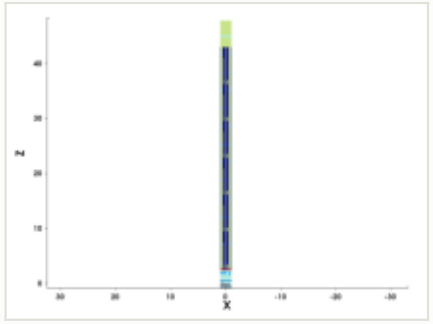

mask for this step

no mask for this step

steps by process area

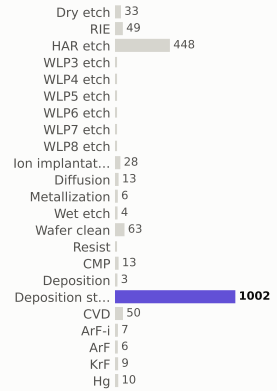

materials deposited (g)

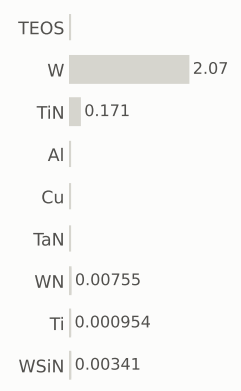

gases emitted (g)

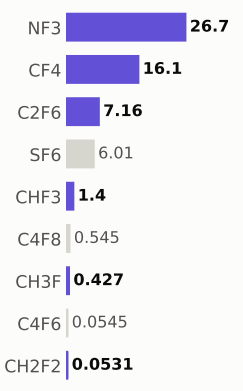

Step #23150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,477.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

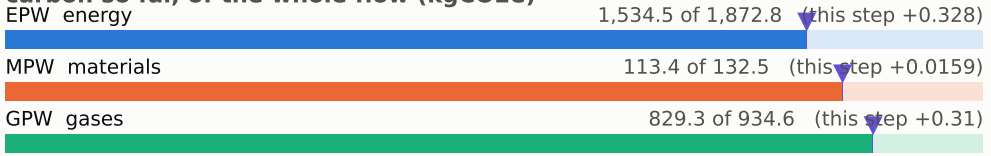

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

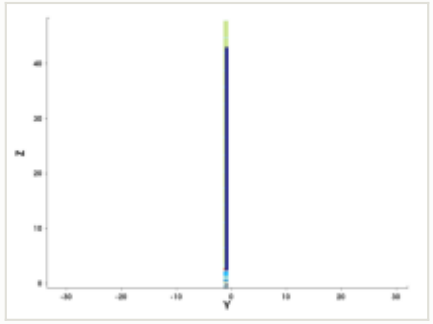

y cut at -1.035 µm

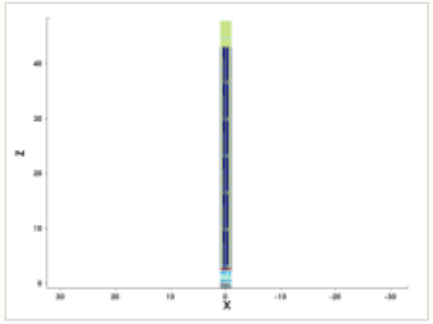

mask for this step

no mask for this step

steps by process area

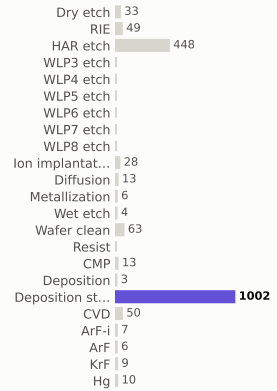

materials deposited (g)

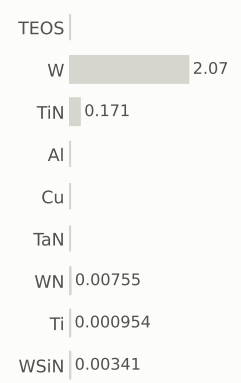

gases emitted (g)

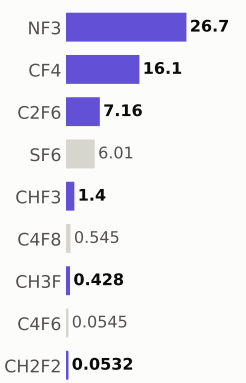

Step #23160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,477.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

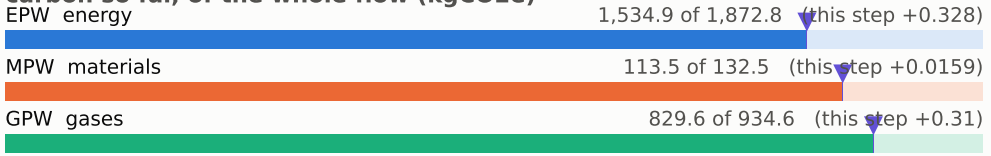

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

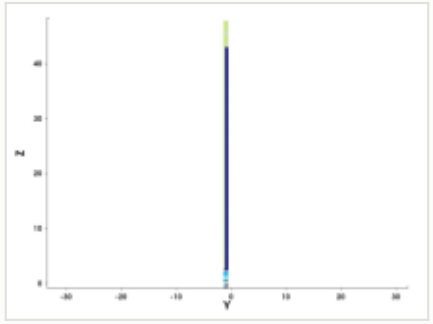

y cut at -1.035 µm

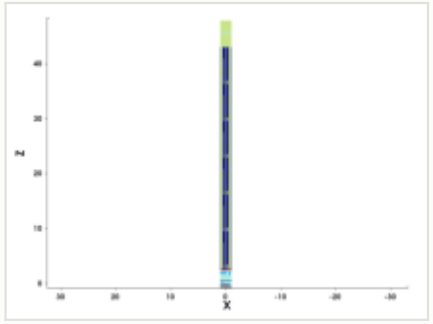

mask for this step

no mask for this step

steps by process area

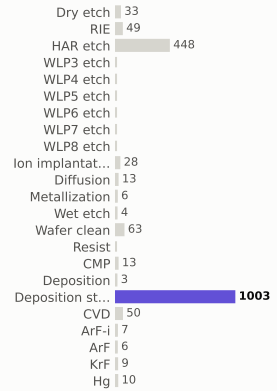

materials deposited (g)

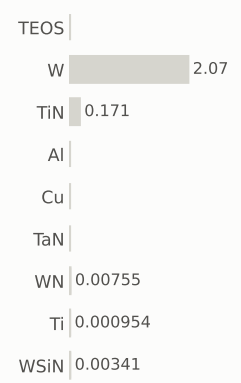

gases emitted (g)

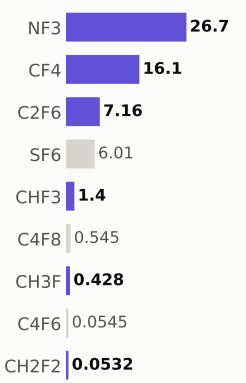

Step #23170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,478.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

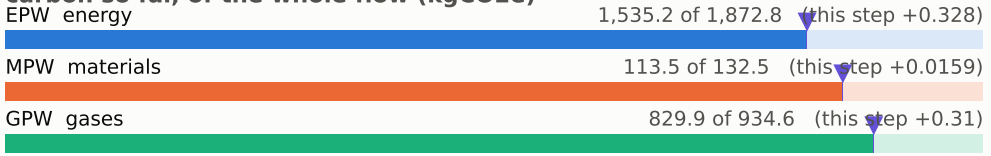

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

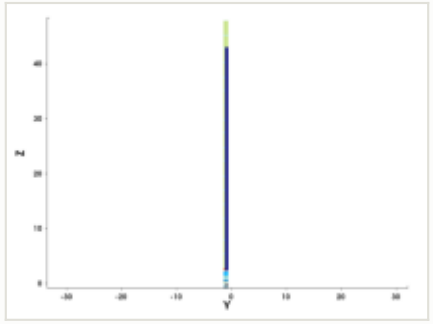

y cut at -1.035 µm

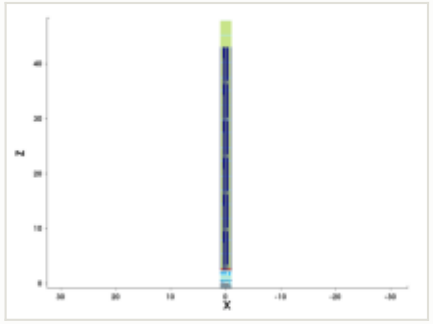

mask for this step

no mask for this step

steps by process area

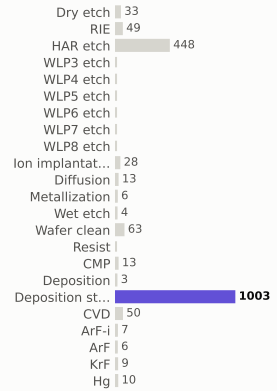

materials deposited (g)

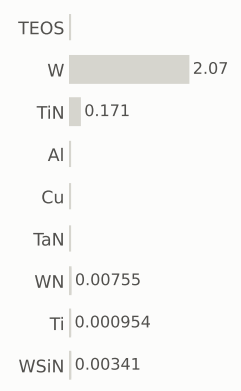

gases emitted (g)

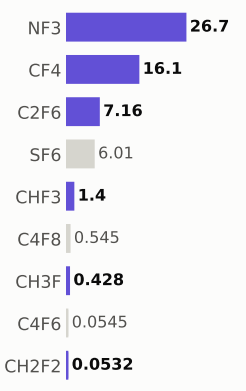

Step #23180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,479.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

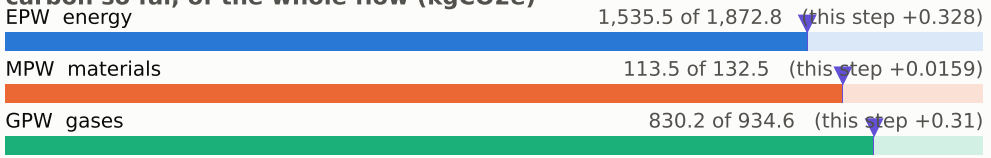

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

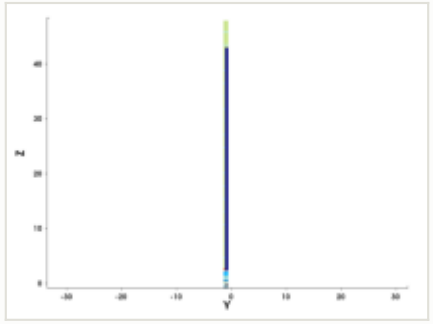

y cut at -1.035 µm

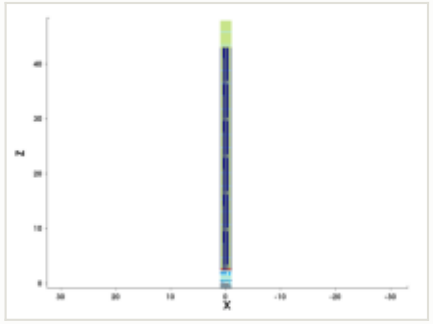

mask for this step

no mask for this step

steps by process area

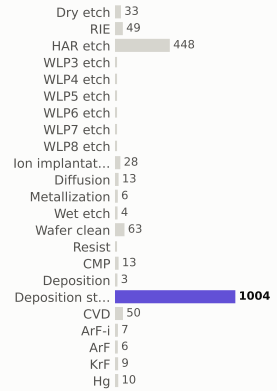

materials deposited (g)

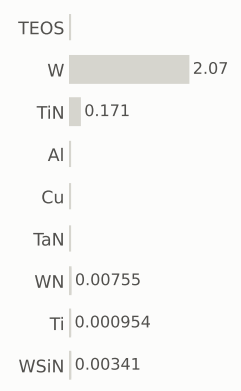

gases emitted (g)

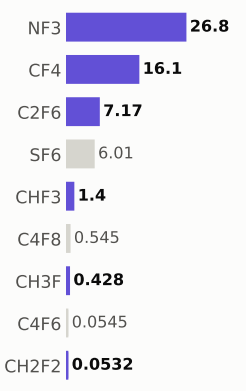

Step #23190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,479.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

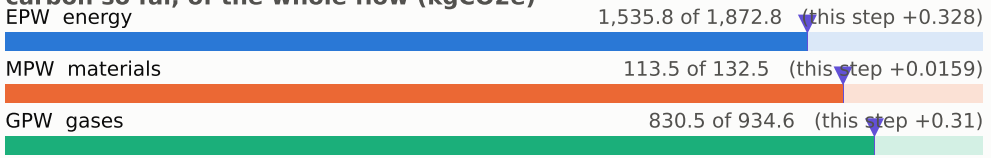

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

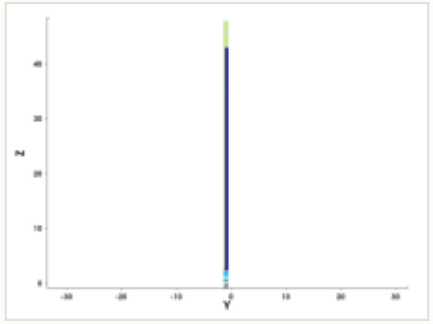

y cut at -1.035 µm

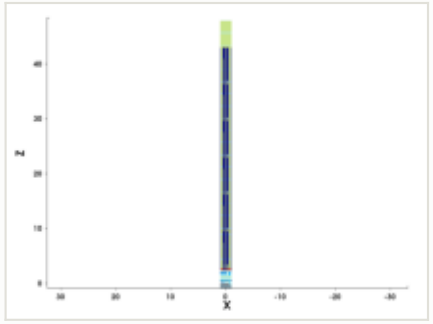

mask for this step

no mask for this step

steps by process area

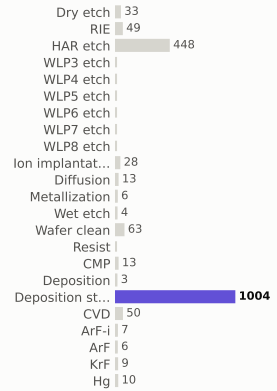

materials deposited (g)

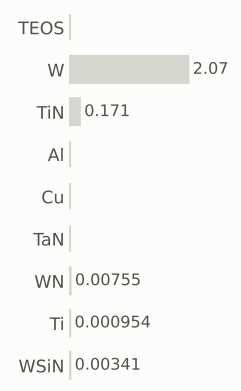

gases emitted (g)

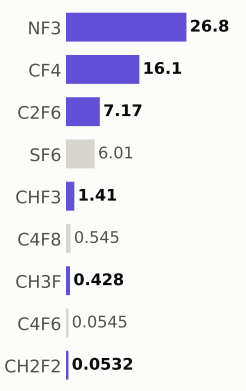

Step #23200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,480.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

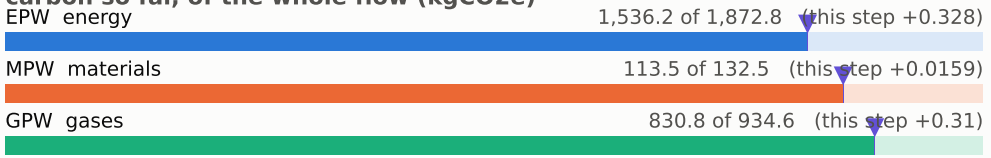

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

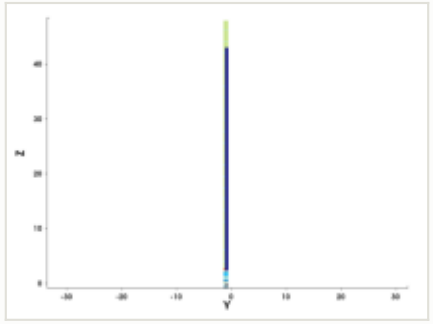

y cut at -1.035 µm

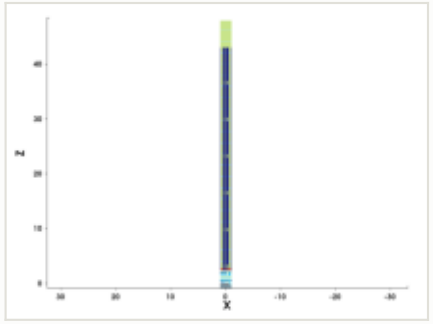

mask for this step

no mask for this step

steps by process area

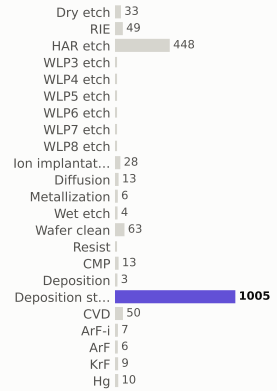

materials deposited (g)

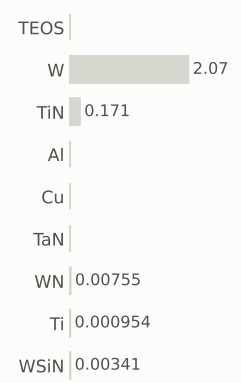

gases emitted (g)

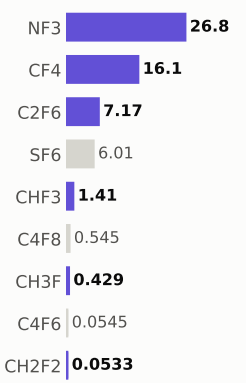

Step #23210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,481.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

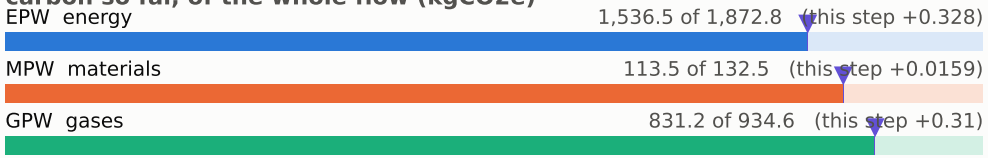

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

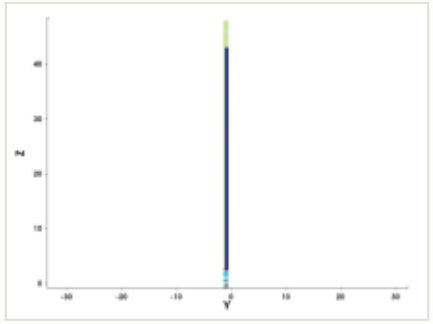

y cut at -1.035 µm

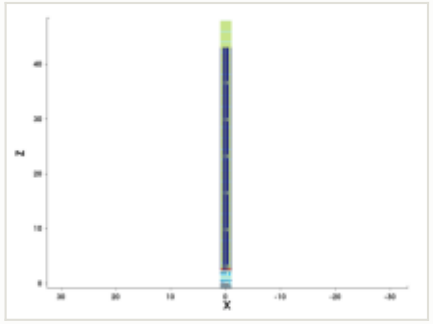

mask for this step

no mask for this step

steps by process area

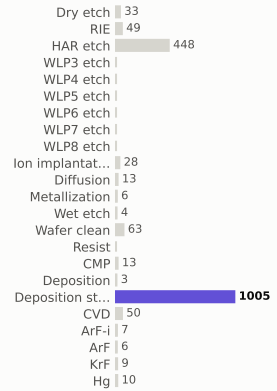

materials deposited (g)

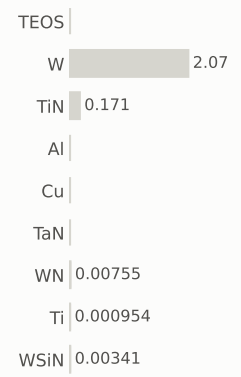

gases emitted (g)

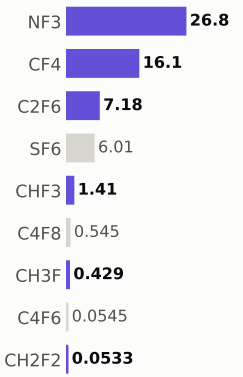

Step #23220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,481.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

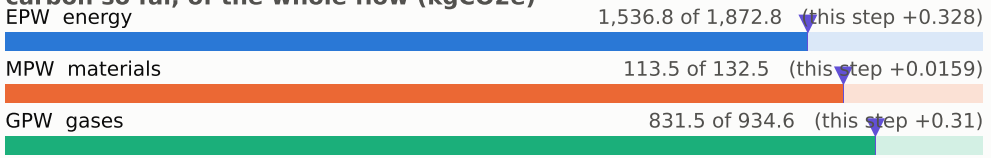

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

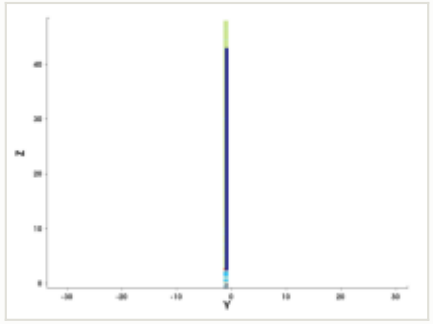

y cut at -1.035 µm

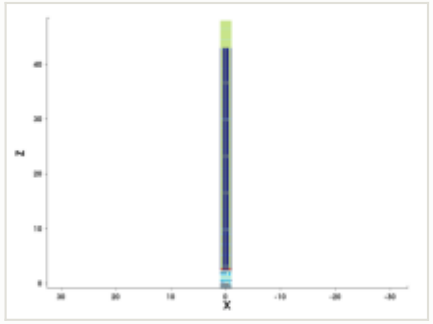

mask for this step

no mask for this step

steps by process area

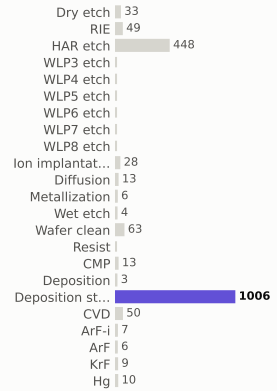

materials deposited (g)

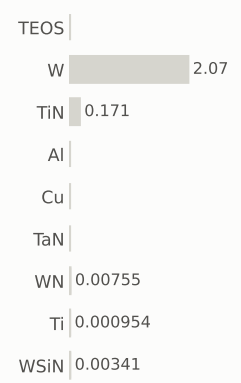

gases emitted (g)

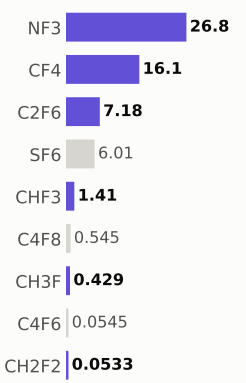

Step #23230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,482.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

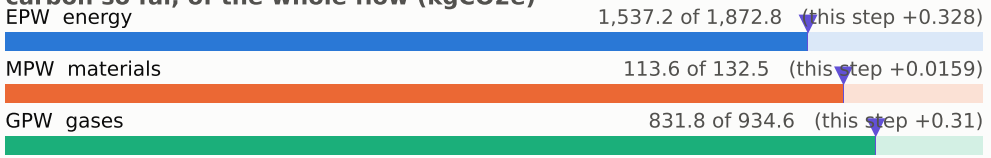

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

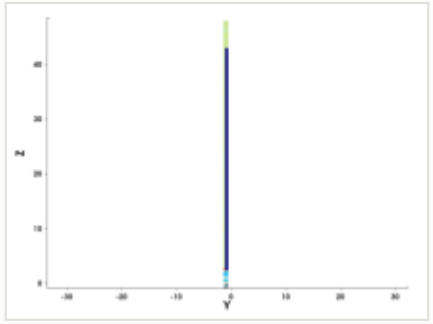

y cut at -1.035 µm

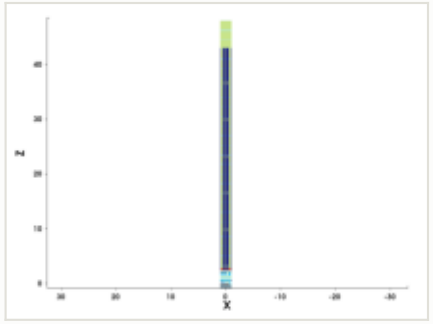

mask for this step

no mask for this step

steps by process area

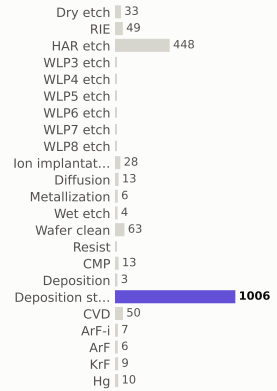

materials deposited (g)

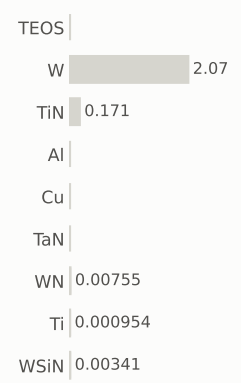

gases emitted (g)

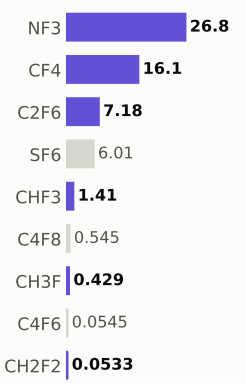

Step #23240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,483.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

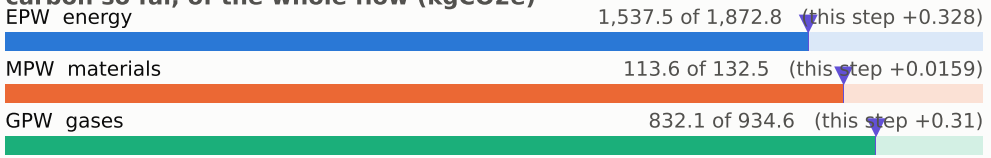

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

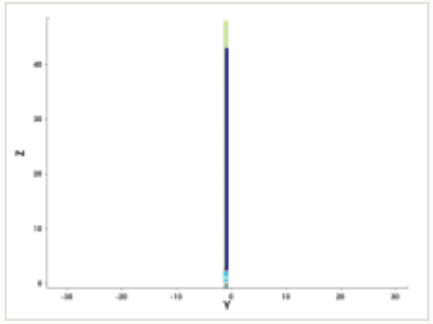

y cut at -1.035 µm

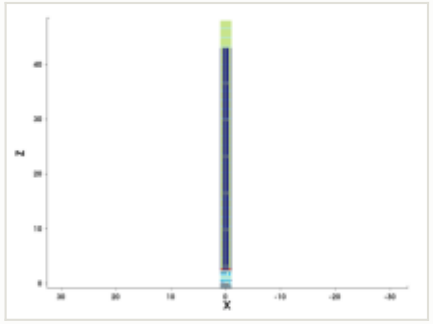

mask for this step

no mask for this step

steps by process area

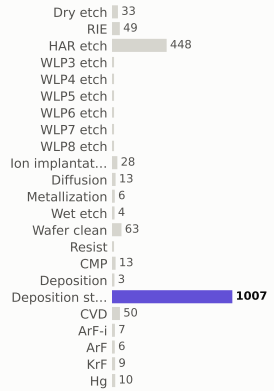

materials deposited (g)

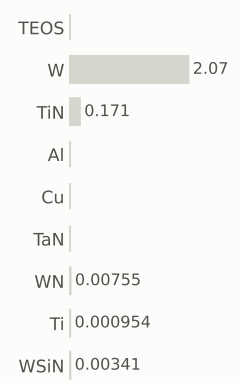

gases emitted (g)



Step #23250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,483.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

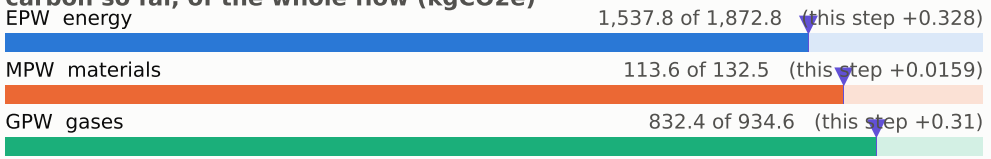

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

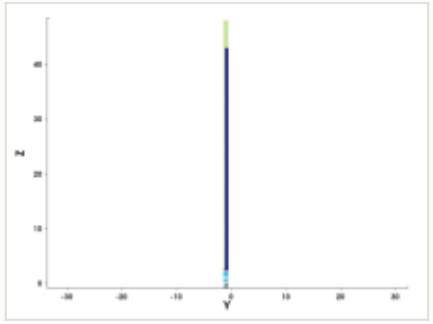

y cut at -1.035 µm

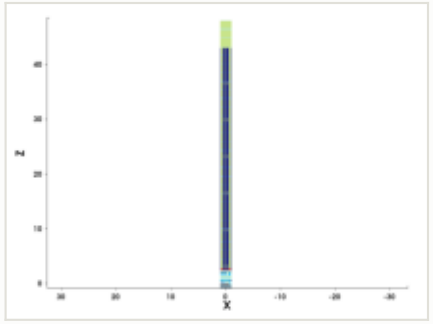

mask for this step

no mask for this step

steps by process area

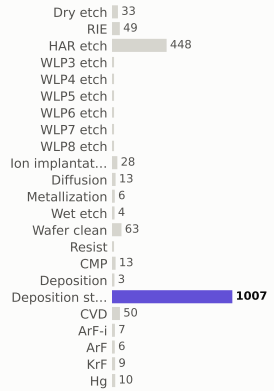

materials deposited (g)

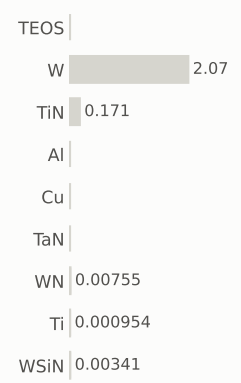

gases emitted (g)

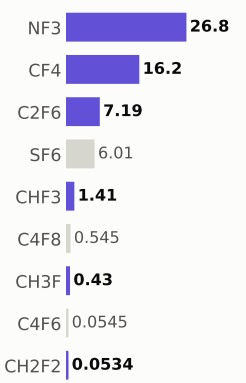

Step #23260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,484.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

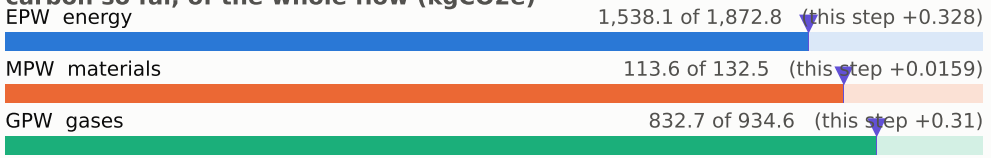

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

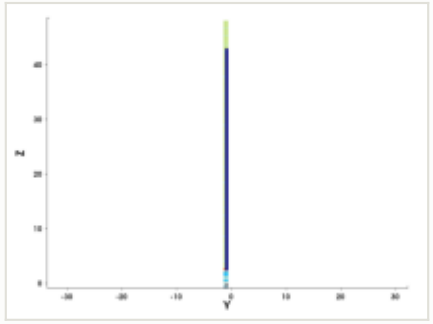

y cut at -1.035 µm

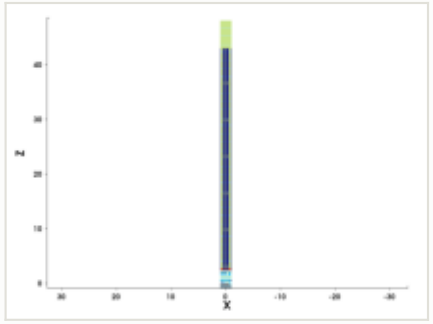

mask for this step

no mask for this step

steps by process area

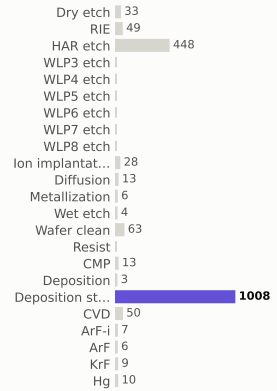

materials deposited (g)

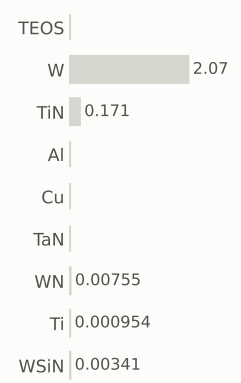

gases emitted (g)

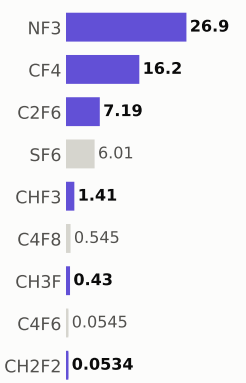

Step #23270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,485.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

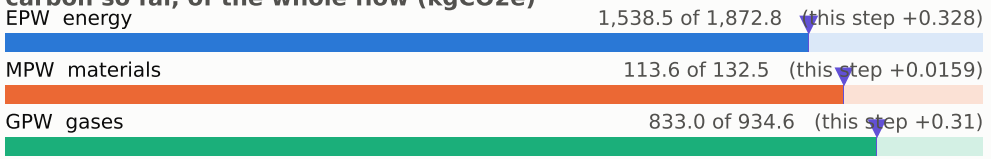

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

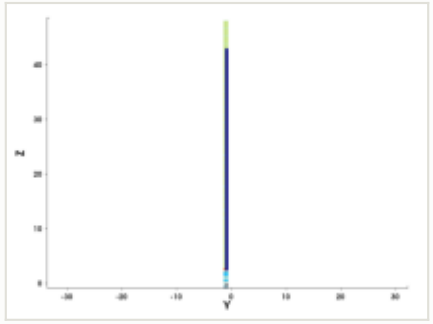

y cut at -1.035 µm

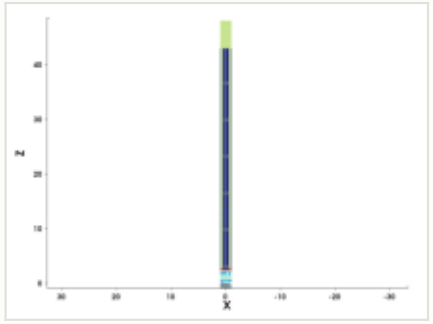

mask for this step

no mask for this step

steps by process area

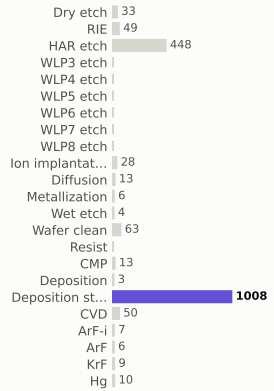

materials deposited (g)

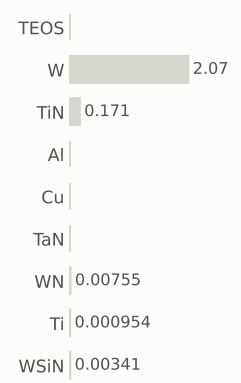

gases emitted (g)

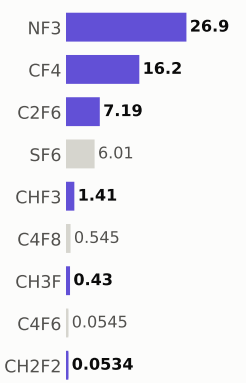

Step #23280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,485.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

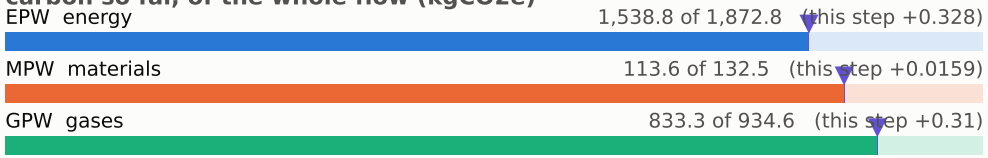

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

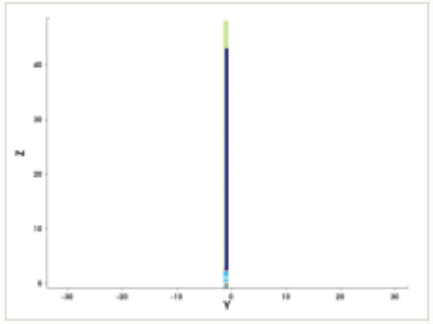

y cut at -1.035 µm

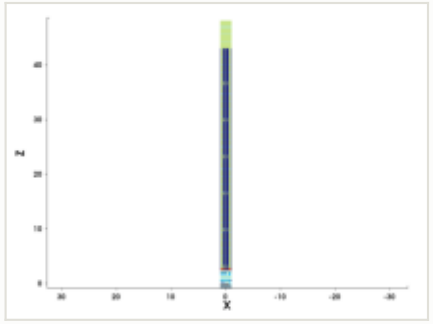

mask for this step

no mask for this step

steps by process area

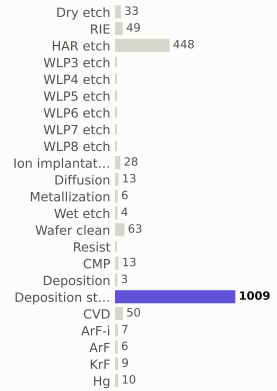

materials deposited (g)

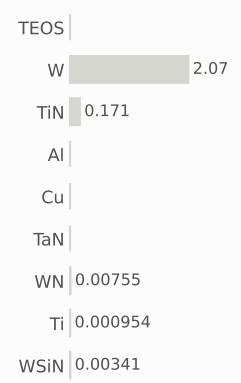

gases emitted (g)

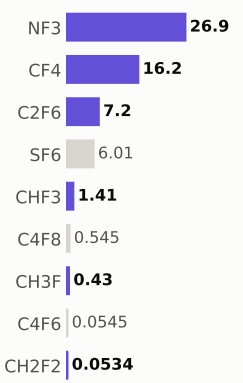

Step #23290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,486.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

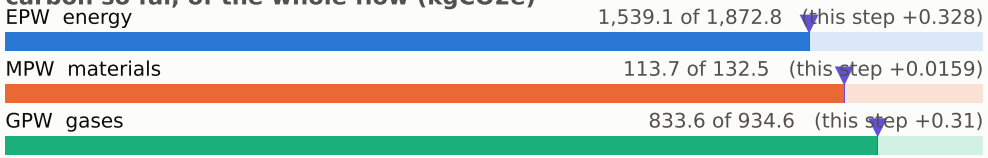

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

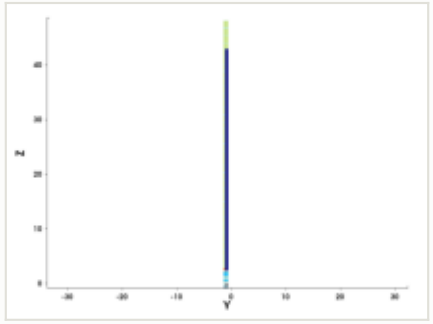

y cut at -1.035 µm

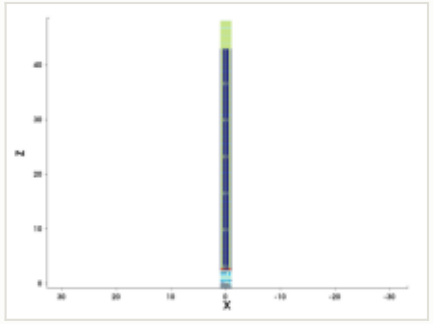

mask for this step

no mask for this step

steps by process area

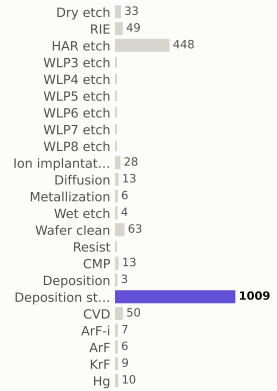

materials deposited (g)

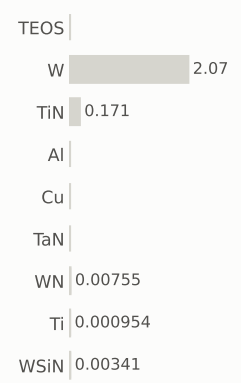

gases emitted (g)

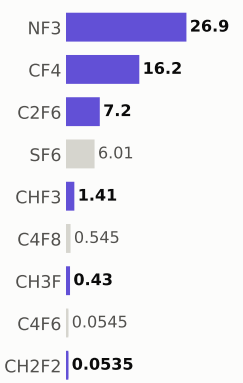

Step #23300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,487.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

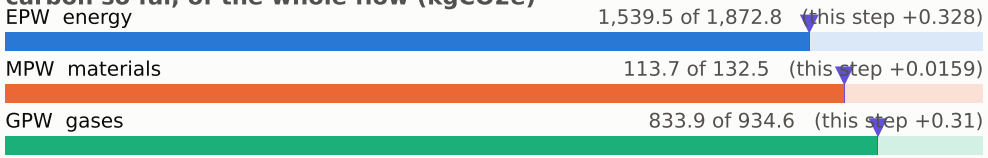

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

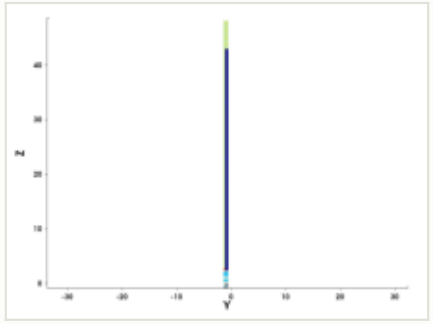

y cut at -1.035 µm

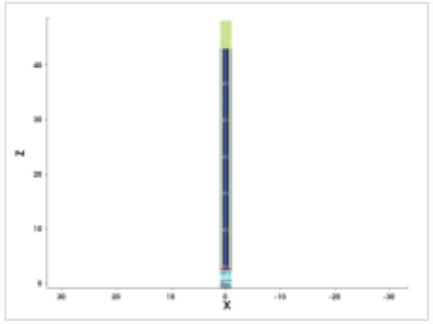

mask for this step

no mask for this step

steps by process area

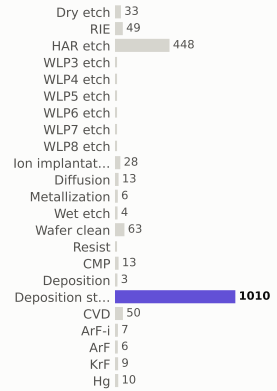

materials deposited (g)

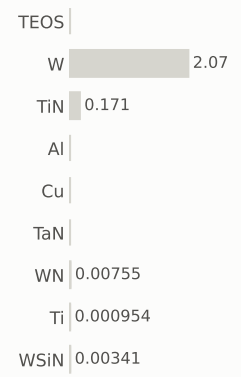

gases emitted (g)

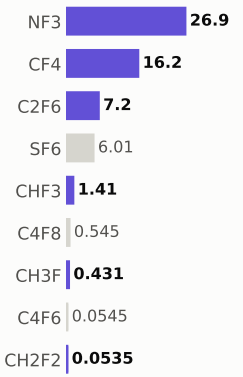

Step #23310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,487.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

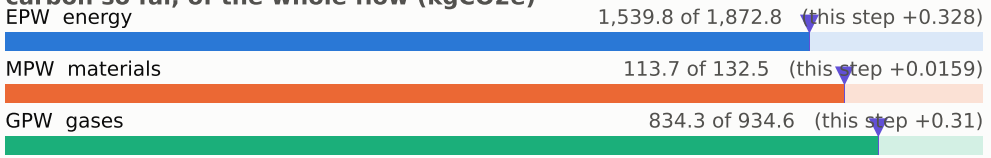

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

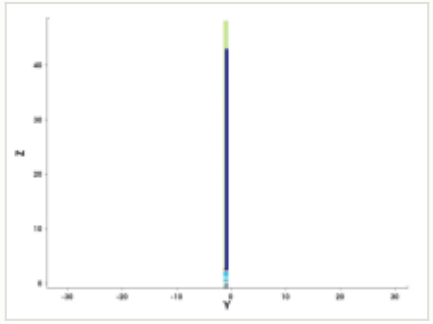

y cut at -1.035 µm

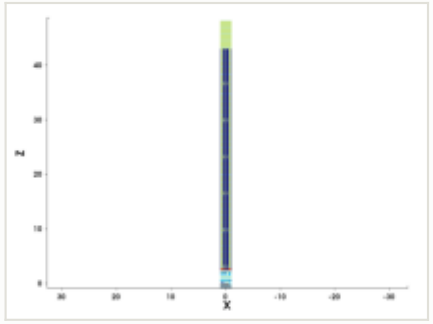

mask for this step

no mask for this step

steps by process area

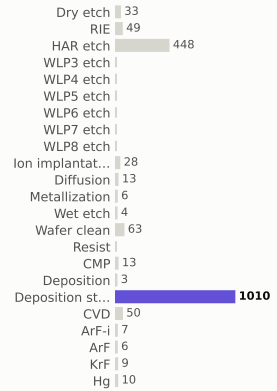

materials deposited (g)

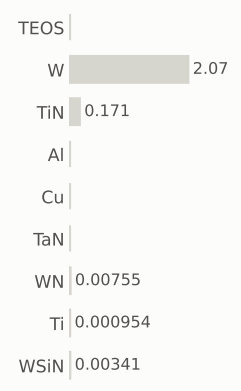

gases emitted (g)

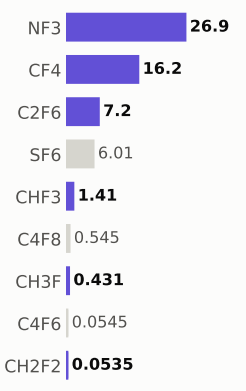

Step #23320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,488.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

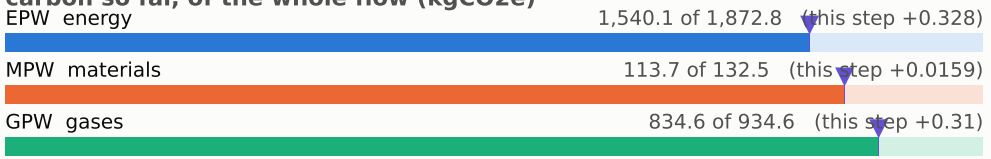

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

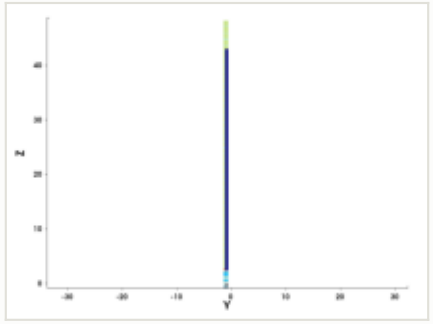

y cut at -1.035 µm

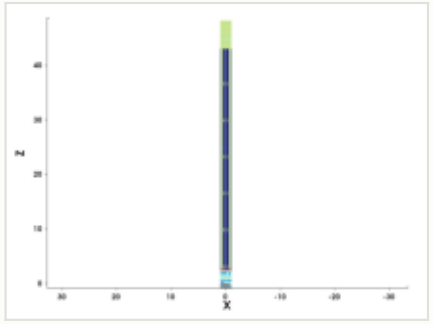

mask for this step

no mask for this step

steps by process area

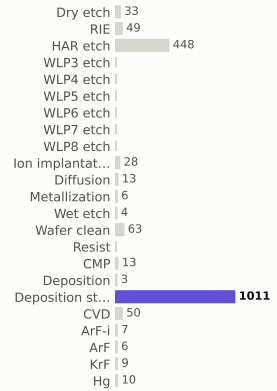

materials deposited (g)

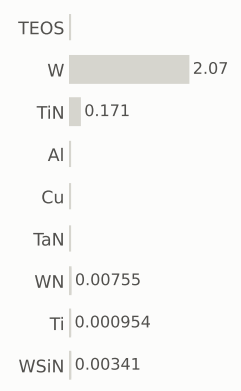

gases emitted (g)

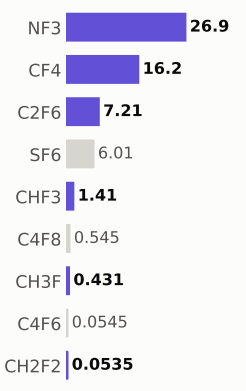

Step #23330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,489.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

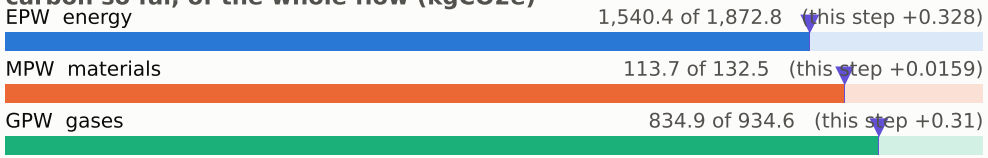

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

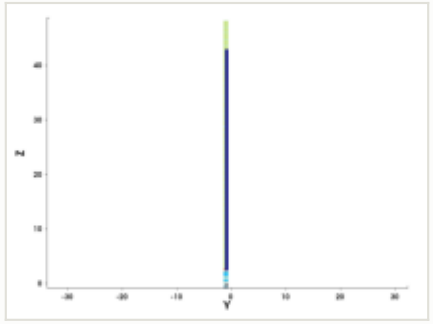

y cut at -1.035 µm

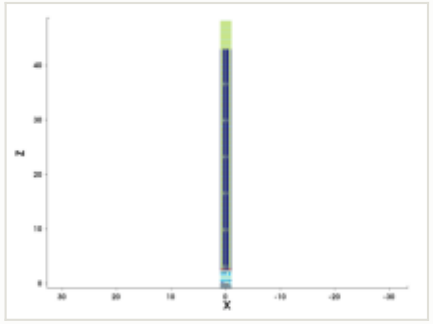

mask for this step

no mask for this step

steps by process area

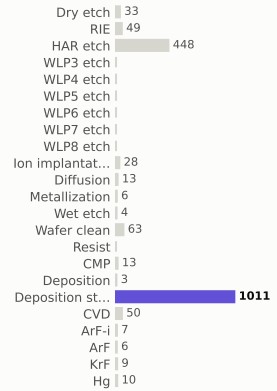

materials deposited (g)

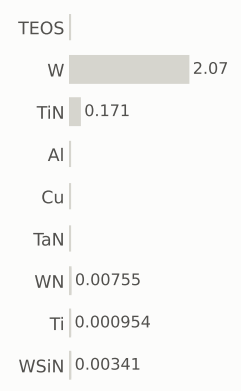

gases emitted (g)

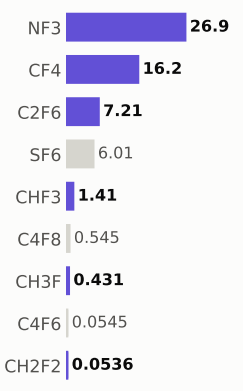

Step #23340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,489.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

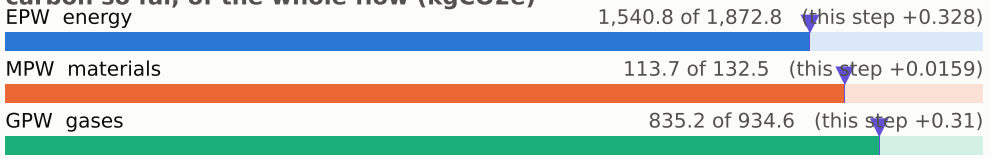

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

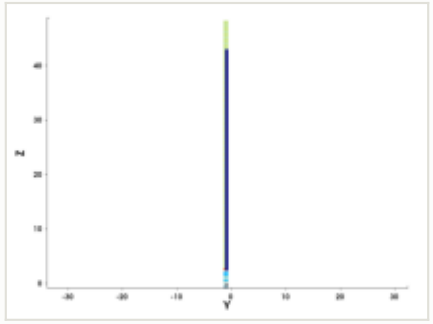

y cut at -1.035 µm

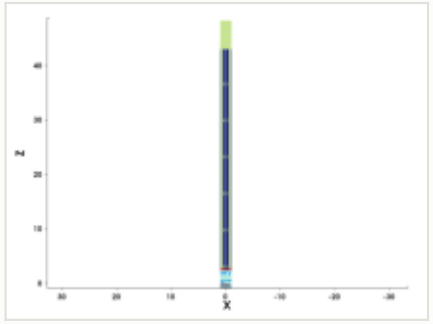

mask for this step

no mask for this step

steps by process area

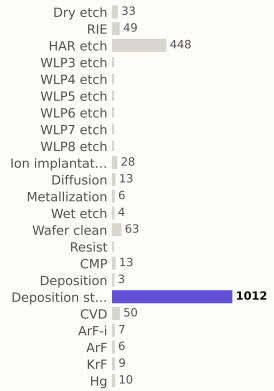

materials deposited (g)

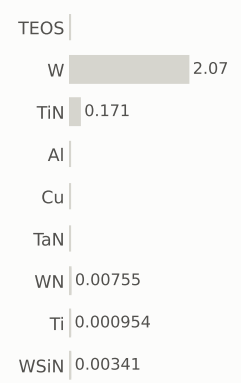

gases emitted (g)

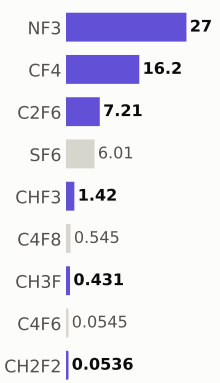

Step #23350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,490.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

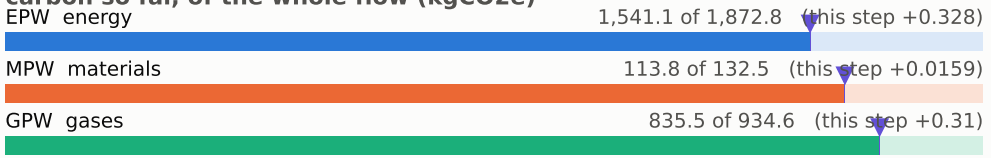

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

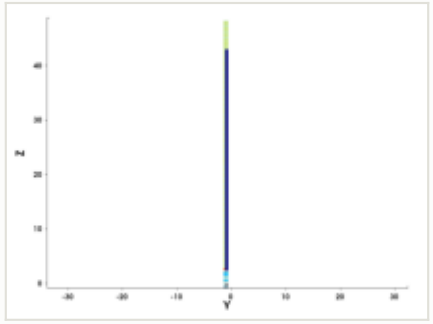

y cut at -1.035 µm

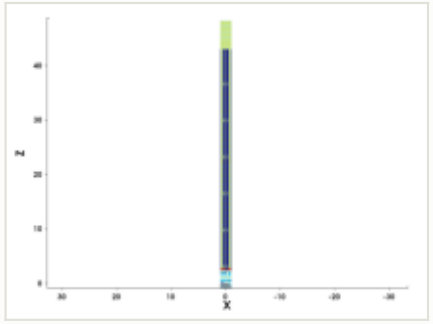

mask for this step

no mask for this step

steps by process area

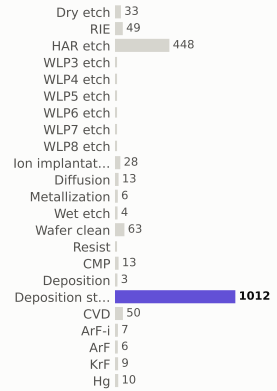

materials deposited (g)

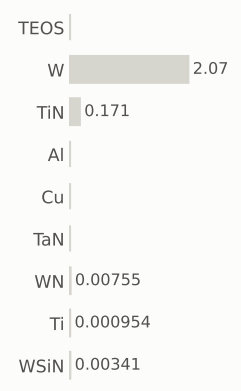

gases emitted (g)

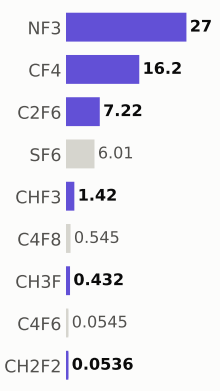

Step #23360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,491.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

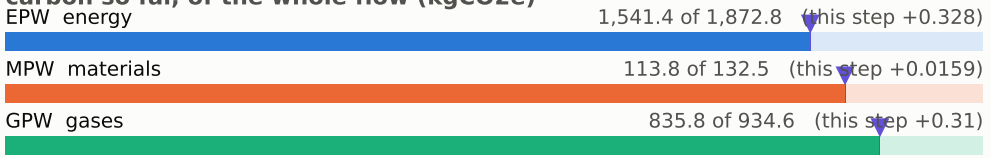

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

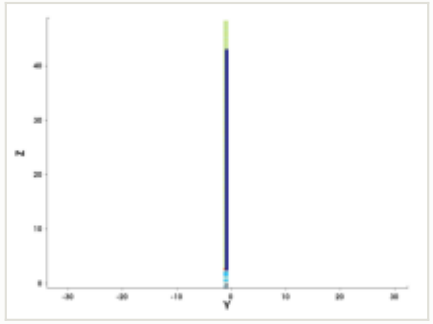

y cut at -1.035 µm

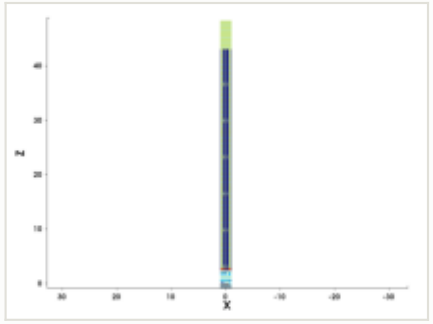

mask for this step

no mask for this step

steps by process area

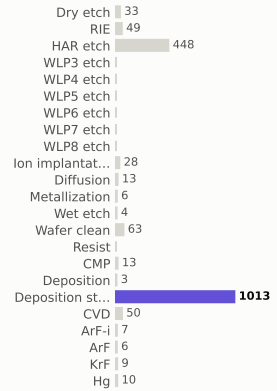

materials deposited (g)

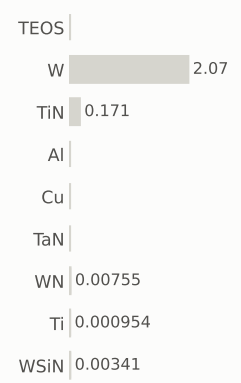

gases emitted (g)



Step #23370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,491.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

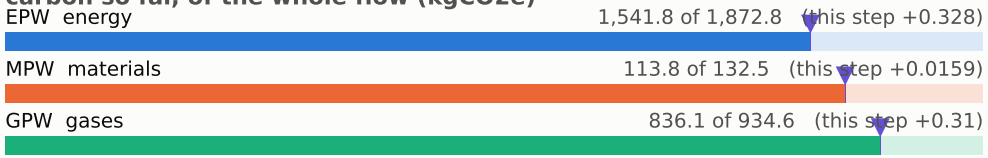

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

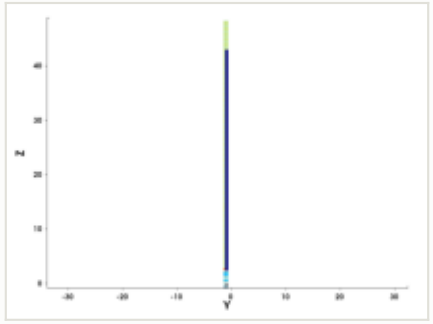

y cut at -1.035 µm

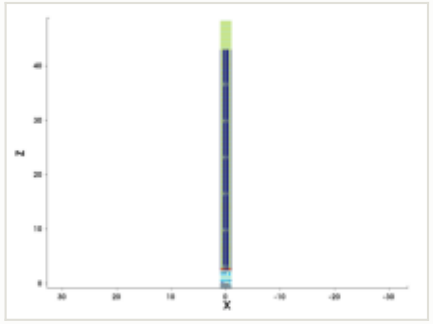

mask for this step

no mask for this step

steps by process area

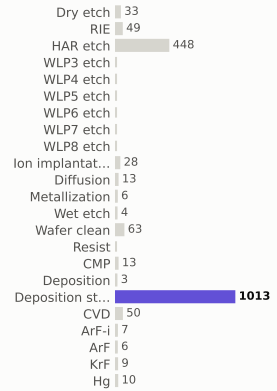

materials deposited (g)

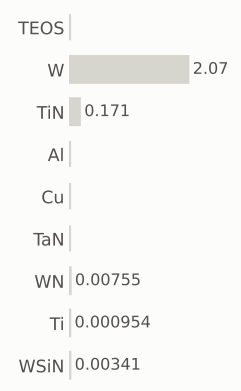

gases emitted (g)

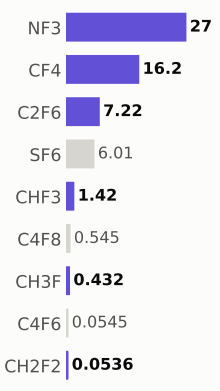

Step #23380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,492.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

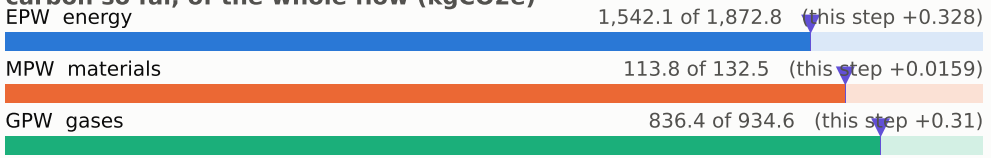

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

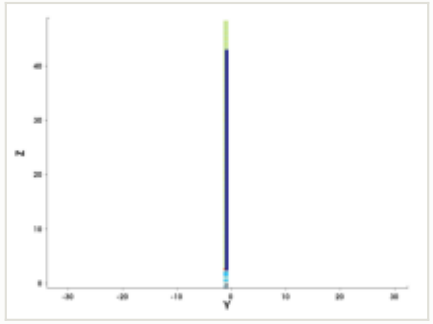

y cut at -1.035 µm

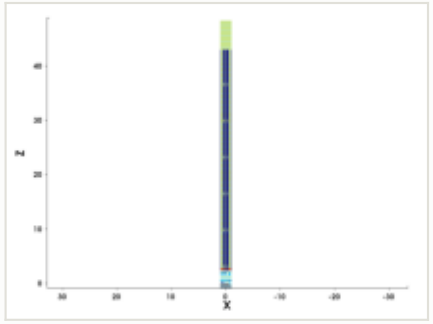

mask for this step

no mask for this step

steps by process area

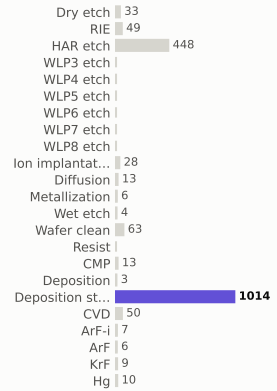

materials deposited (g)

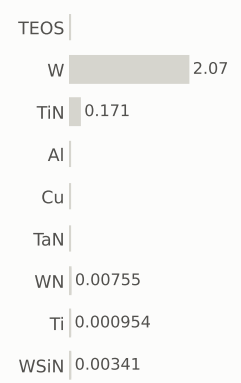

gases emitted (g)

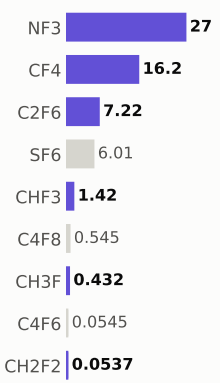

Step #23390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,493.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

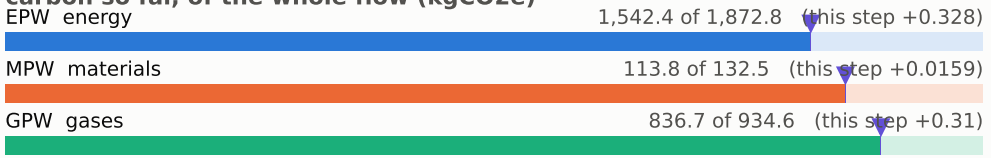

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

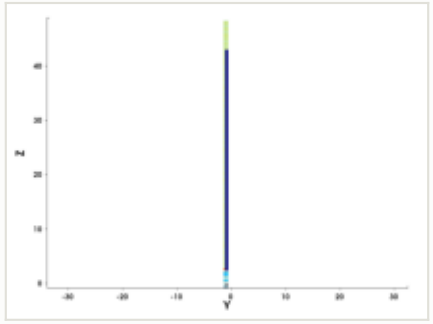

y cut at -1.035 µm

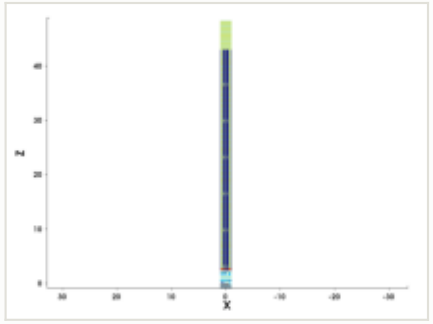

mask for this step

no mask for this step

steps by process area

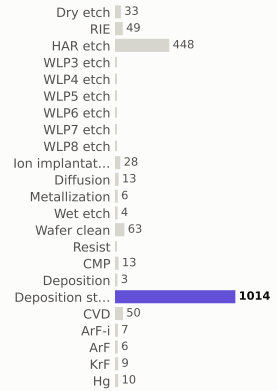

materials deposited (g)

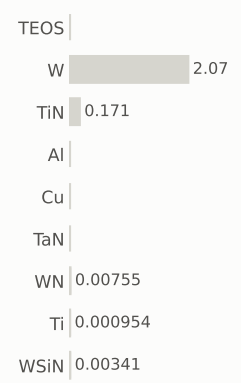

gases emitted (g)

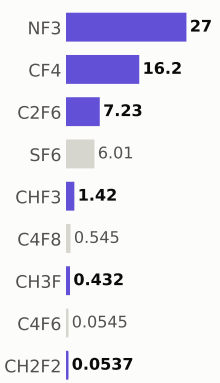

Step #23400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,493.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

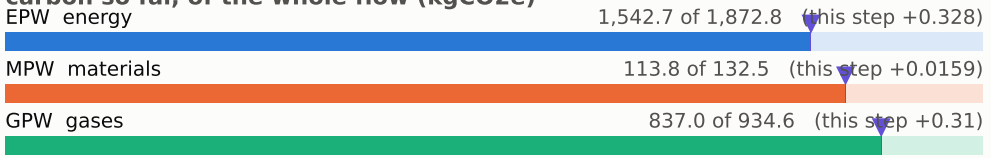

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

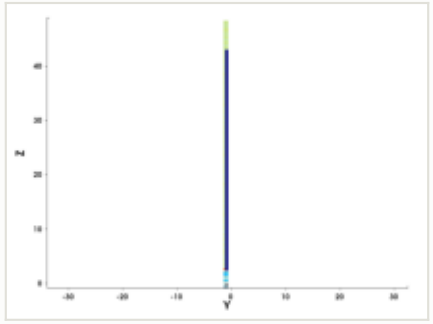

y cut at -1.035 µm

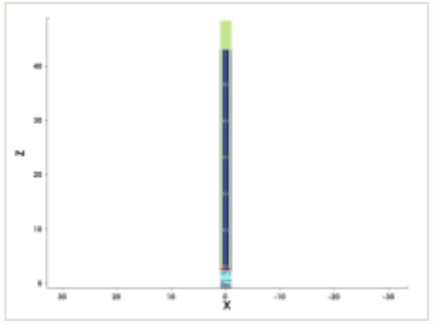

mask for this step

no mask for this step

steps by process area

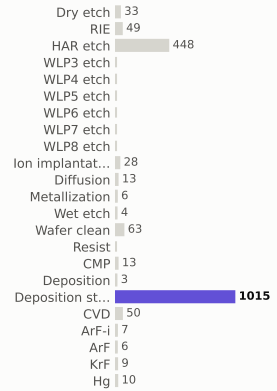

materials deposited (g)

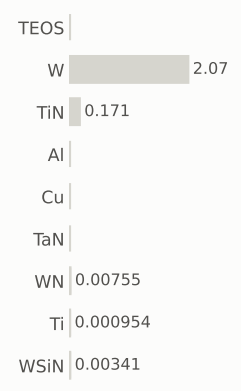

gases emitted (g)

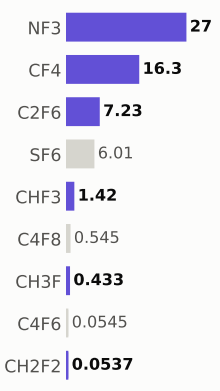

Step #23410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,494.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

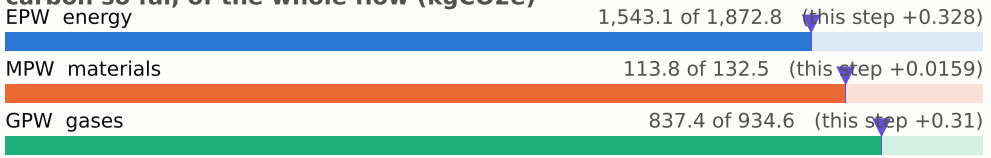

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

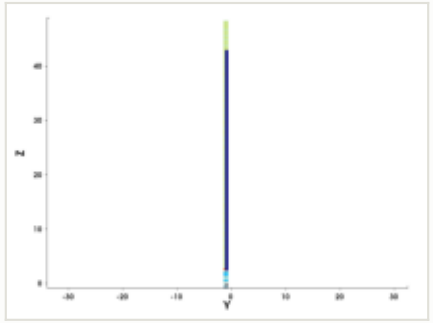

y cut at -1.035 µm

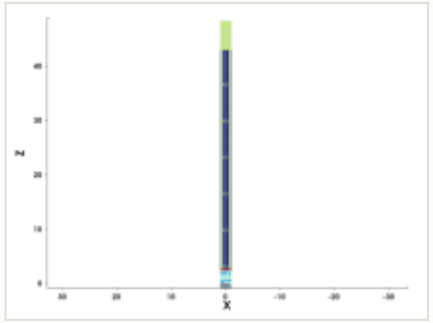

mask for this step

no mask for this step

steps by process area

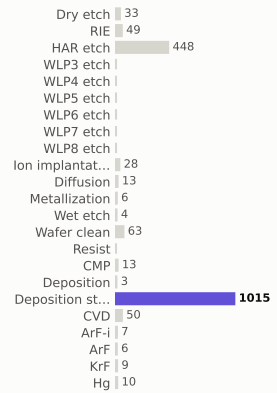

materials deposited (g)

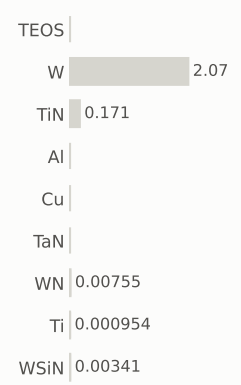

gases emitted (g)

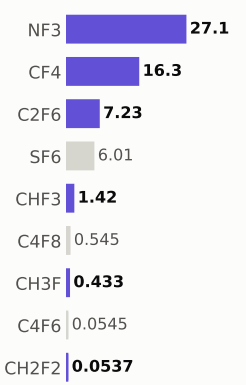

Step #23420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,494.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

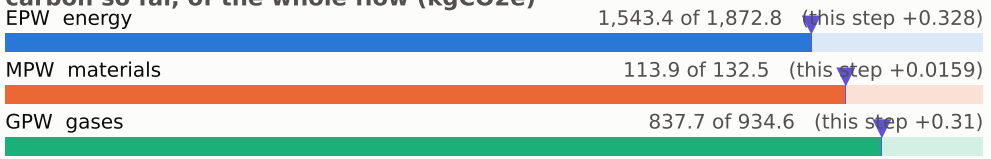

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

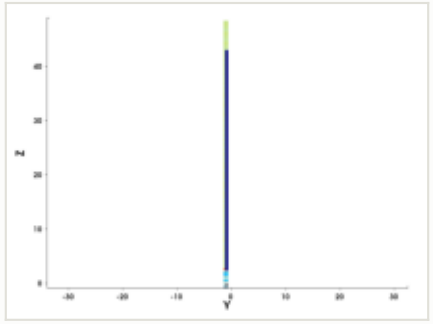

y cut at -1.035 µm

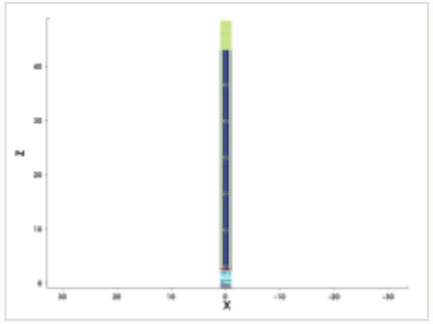

mask for this step

no mask for this step

steps by process area

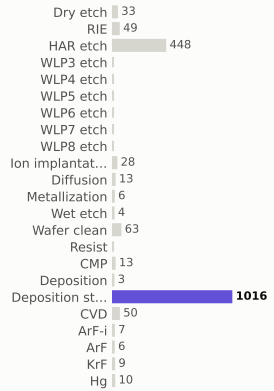

materials deposited (g)

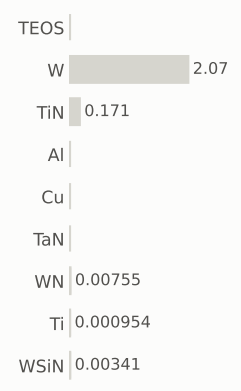

gases emitted (g)

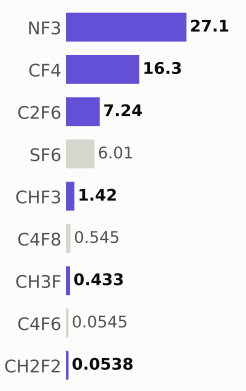

Step #23430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,495.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

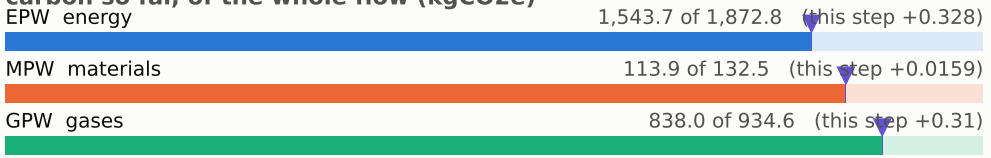

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

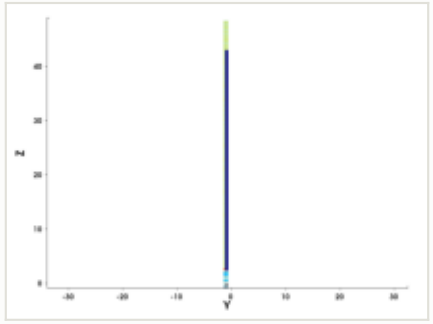

y cut at -1.035 µm

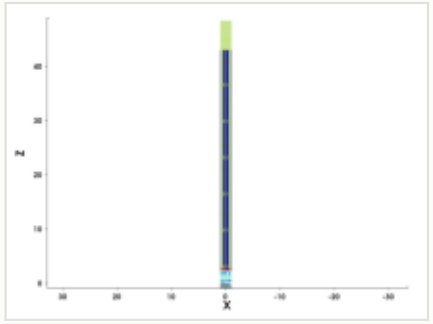

mask for this step

no mask for this step

steps by process area

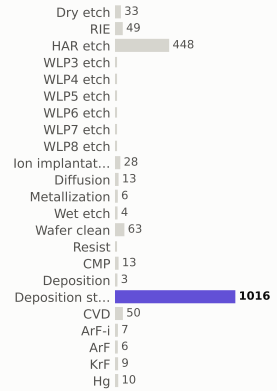

materials deposited (g)

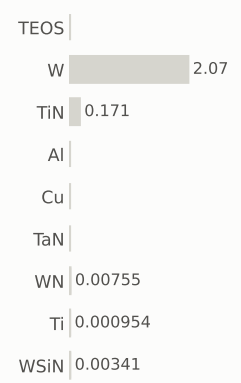

gases emitted (g)

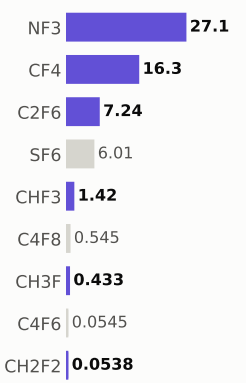

Step #23440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,496.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

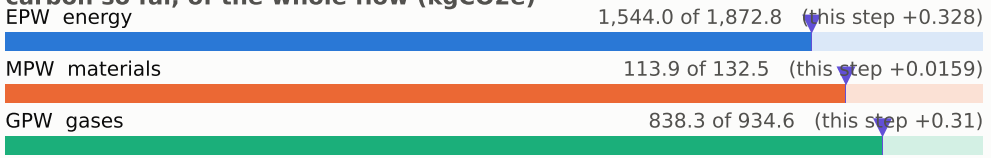

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

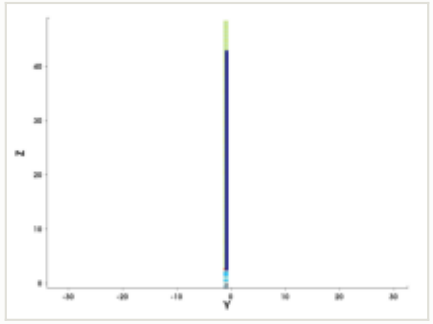

y cut at -1.035 µm

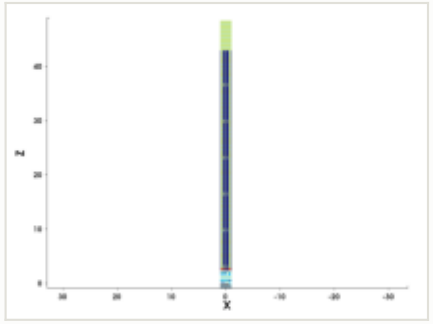

mask for this step

no mask for this step

steps by process area

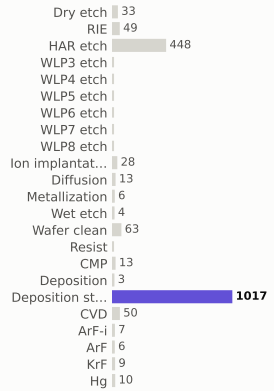

materials deposited (g)

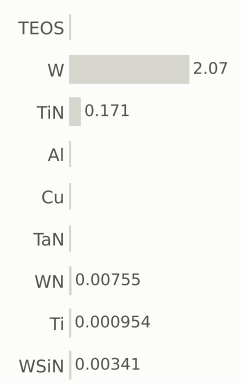

gases emitted (g)

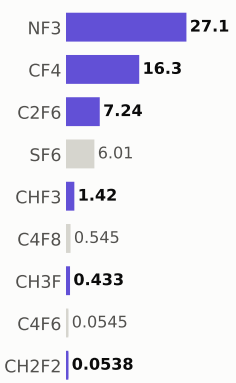

Step #23450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,496.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

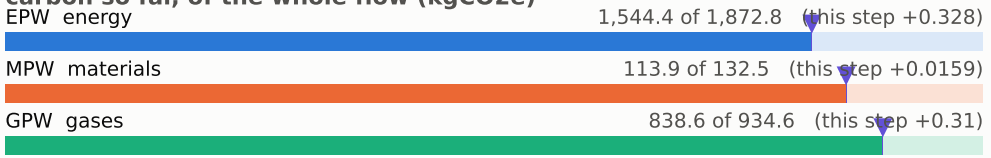

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

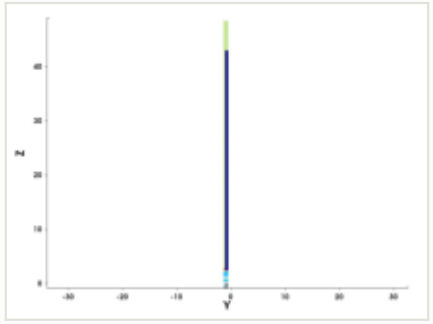

y cut at -1.035 µm

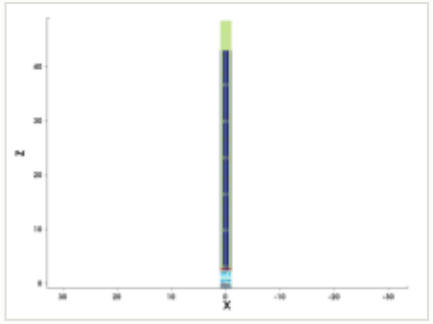

mask for this step

no mask for this step

steps by process area

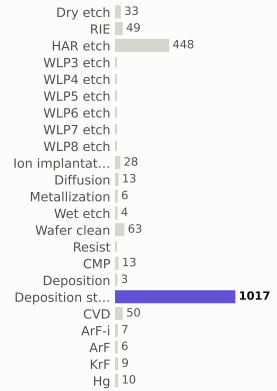

materials deposited (g)

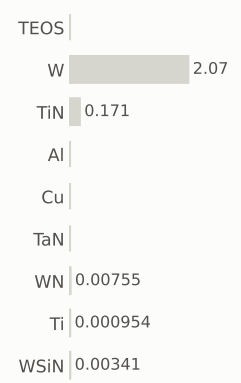

gases emitted (g)

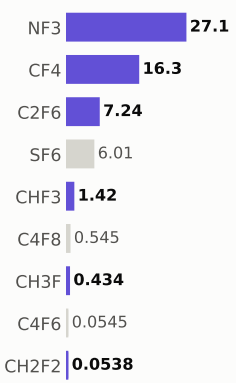

Step #23460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,497.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

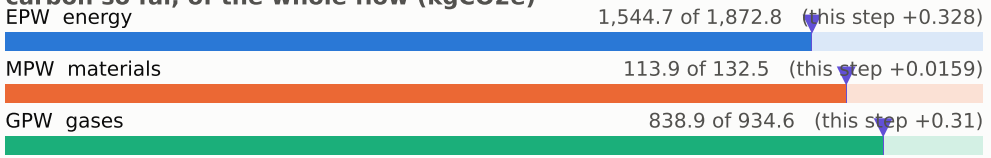

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

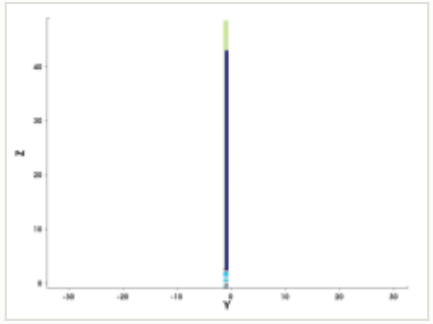

y cut at -1.035 µm

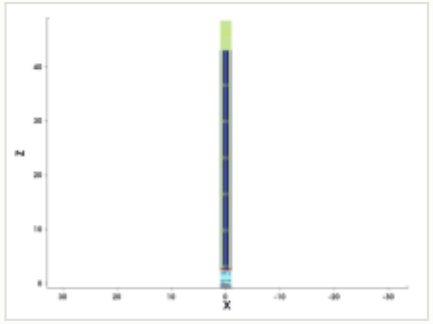

mask for this step

no mask for this step

steps by process area

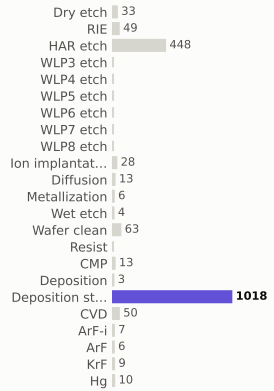

materials deposited (g)

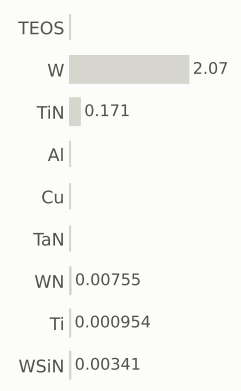

gases emitted (g)

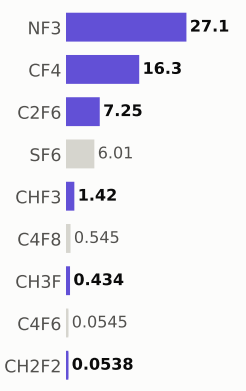

Step #23470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,498.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

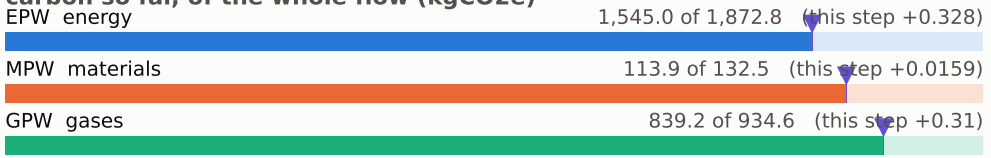

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

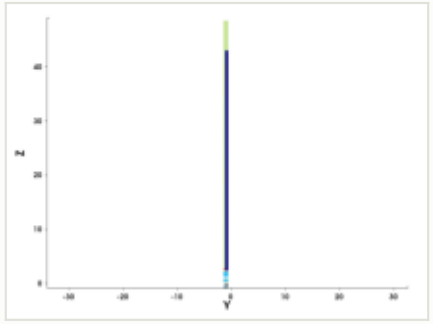

y cut at -1.035 µm

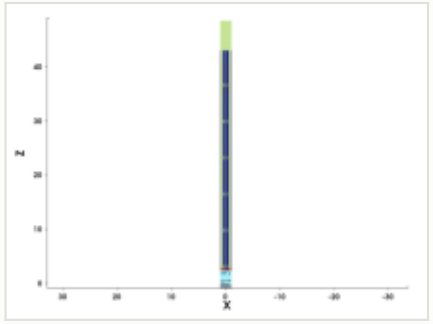

mask for this step

no mask for this step

steps by process area

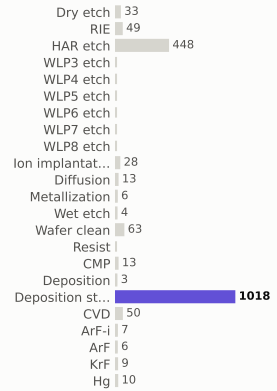

materials deposited (g)

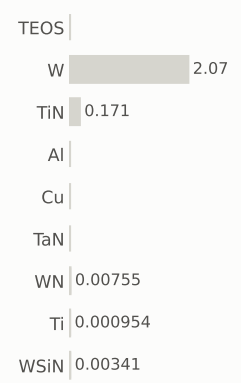

gases emitted (g)

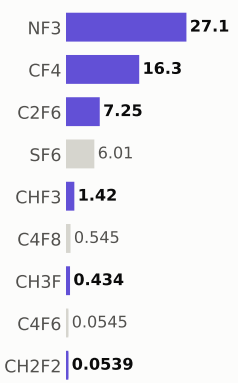

Step #23480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,498.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

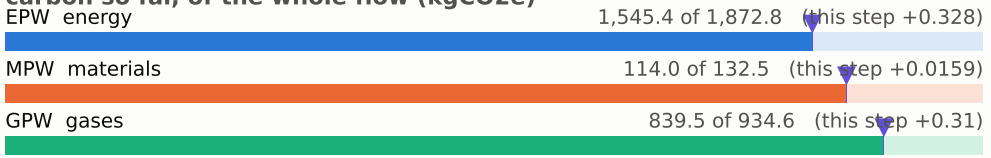

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

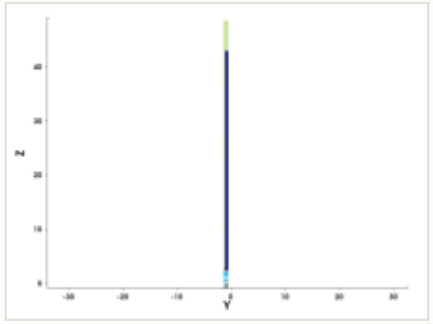

y cut at -1.035 µm

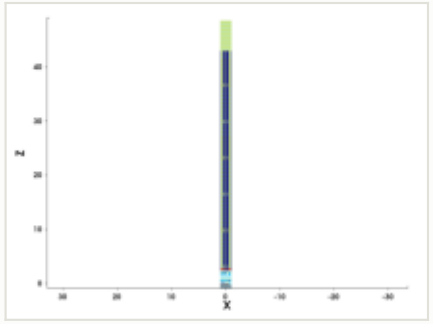

mask for this step

no mask for this step

steps by process area

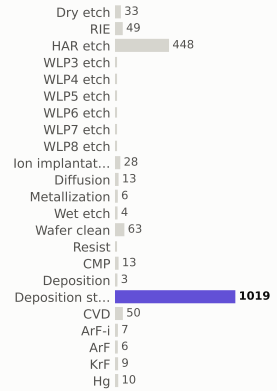

materials deposited (g)

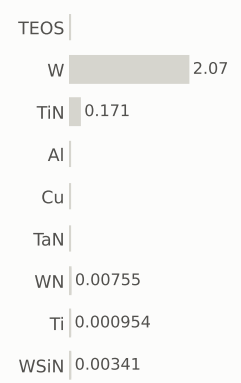

gases emitted (g)

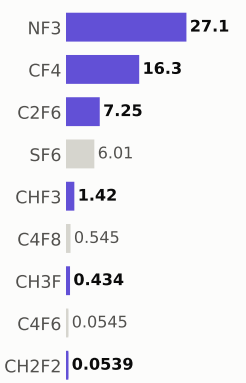

Step #23490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,499.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

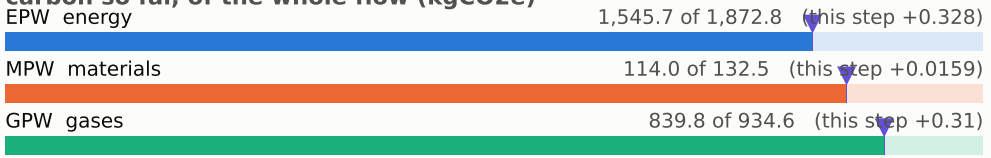

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

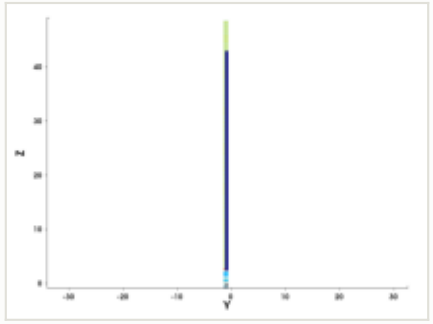

y cut at -1.035 µm

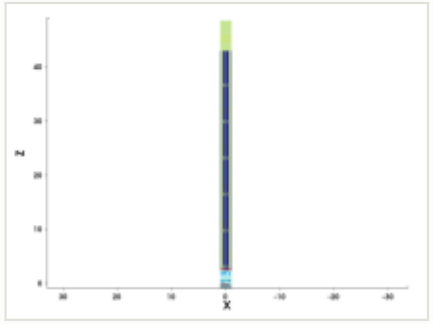

mask for this step

no mask for this step

steps by process area

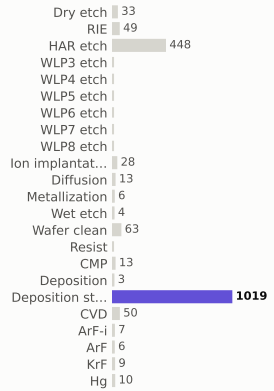

materials deposited (g)

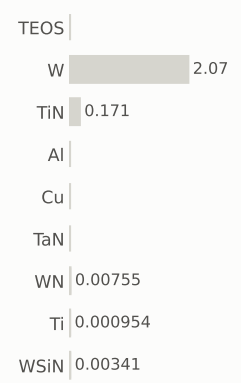

gases emitted (g)

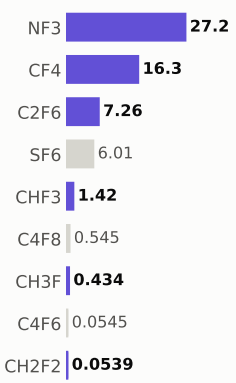

Step #23500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,500.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

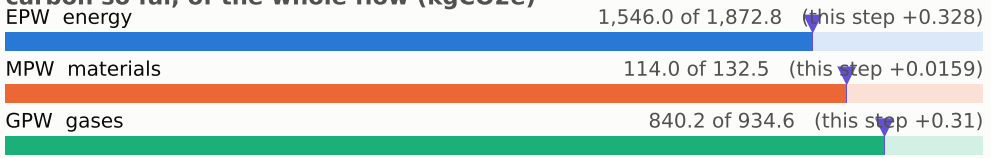

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

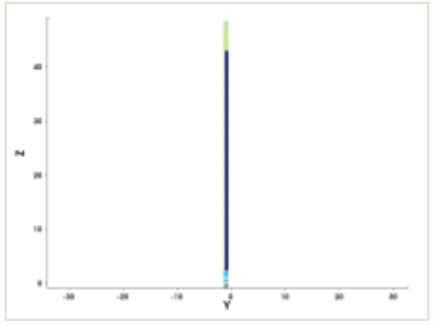

y cut at -1.035 µm

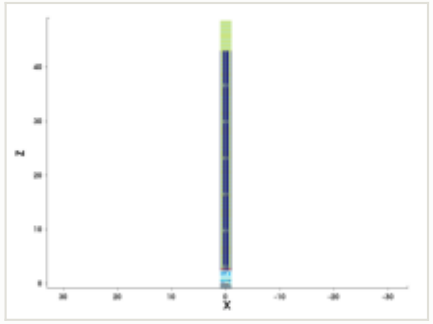

mask for this step

no mask for this step

steps by process area

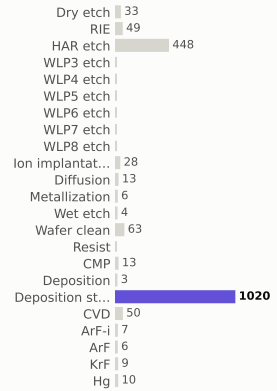

materials deposited (g)

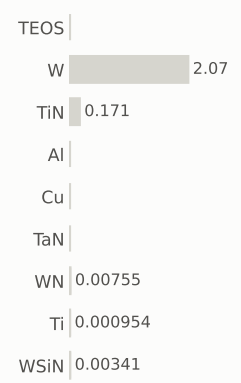

gases emitted (g)

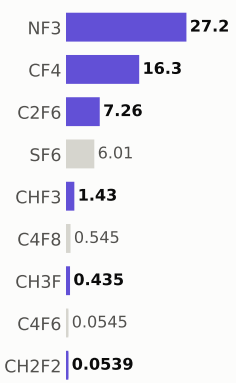

Step #23510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,500.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

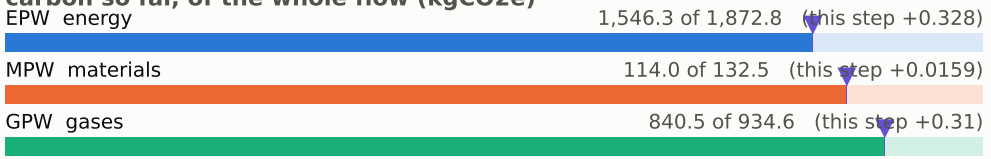

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

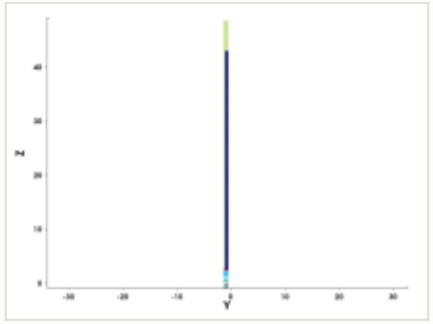

y cut at -1.035 µm

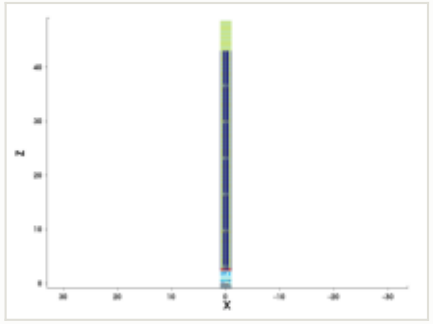

mask for this step

no mask for this step

steps by process area

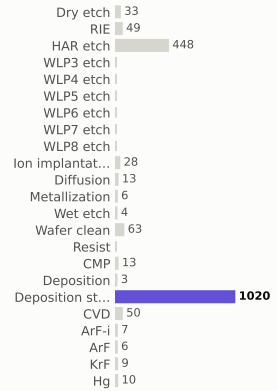

materials deposited (g)

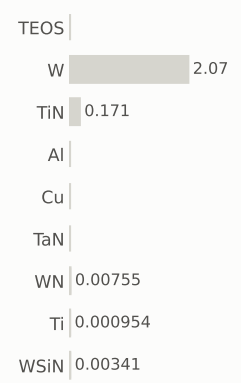

gases emitted (g)

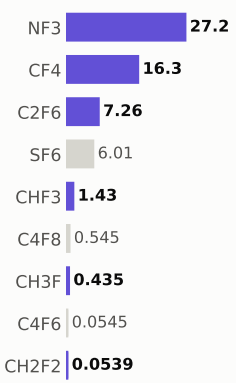

Step #23520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,501.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

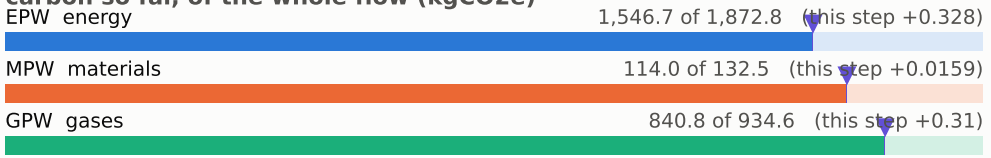

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

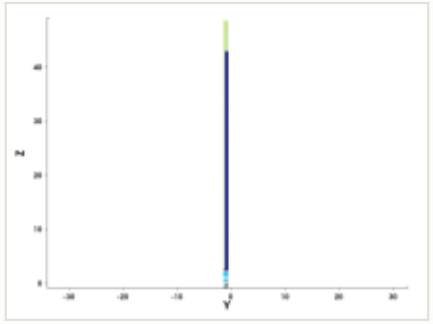

y cut at -1.035 µm

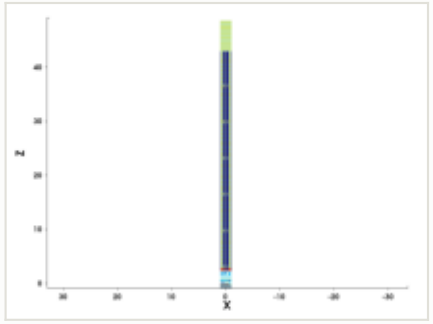

mask for this step

no mask for this step

steps by process area

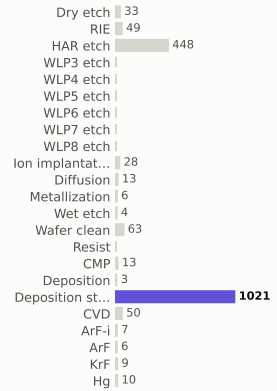

materials deposited (g)

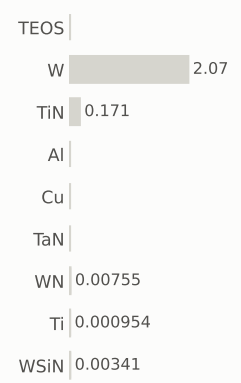

gases emitted (g)

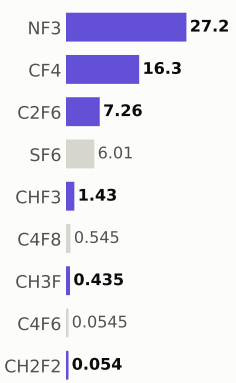

Step #23530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,502.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

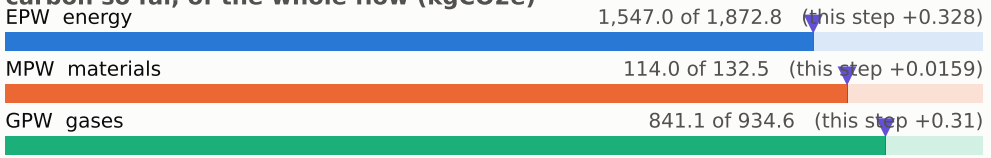

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

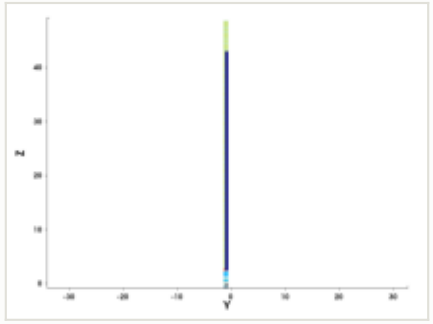

y cut at -1.035 µm

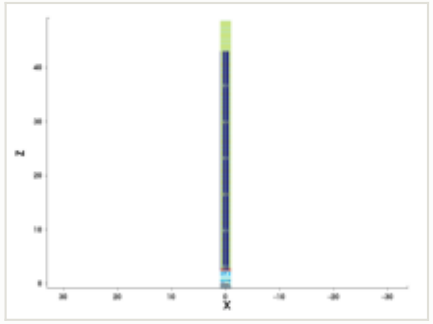

mask for this step

no mask for this step

steps by process area

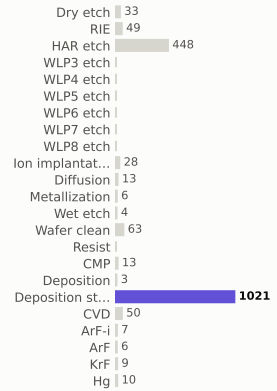

materials deposited (g)

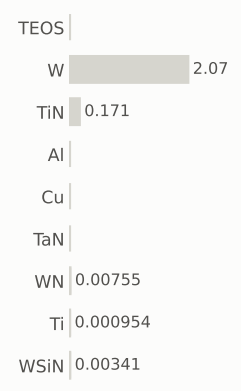

gases emitted (g)

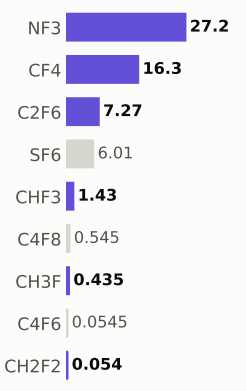

Step #23540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,502.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

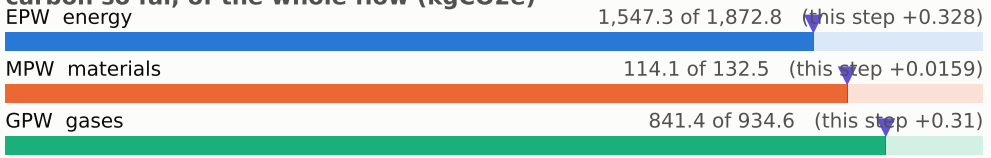

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

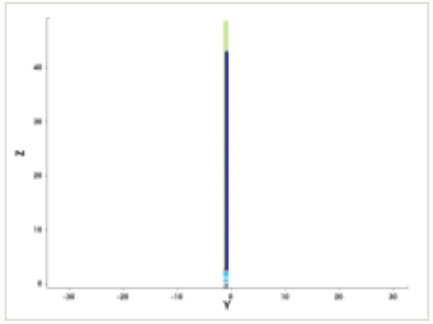

y cut at -1.035 µm

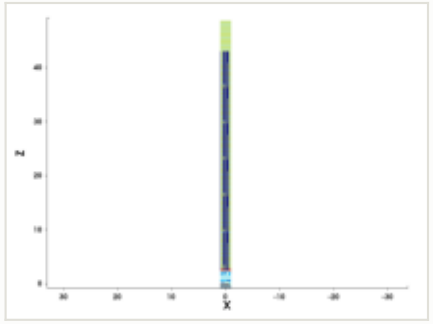

mask for this step

no mask for this step

steps by process area

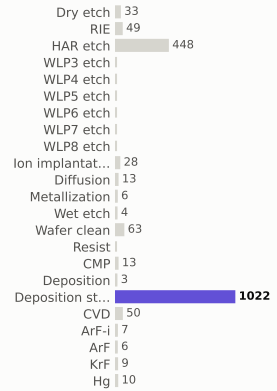

materials deposited (g)

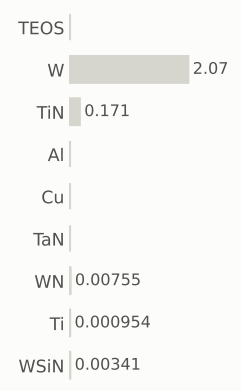

gases emitted (g)

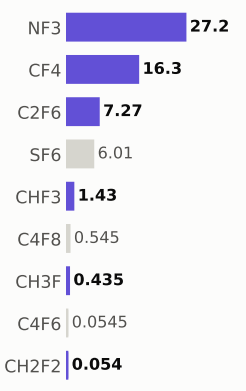

Step #23550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,503.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

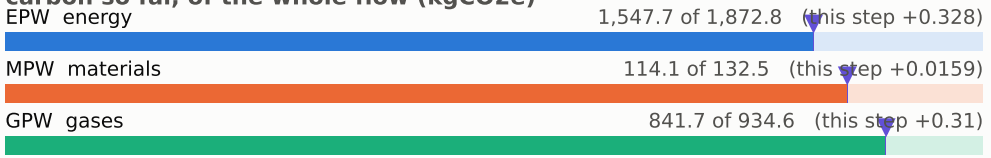

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

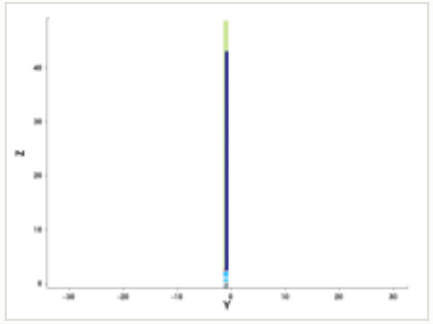

y cut at -1.035 µm

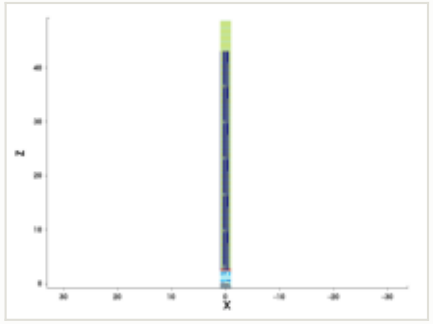

mask for this step

no mask for this step

steps by process area

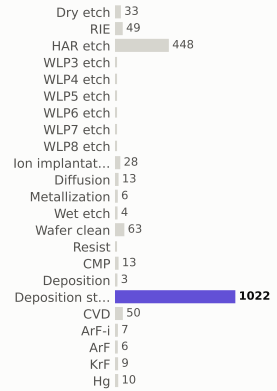

materials deposited (g)

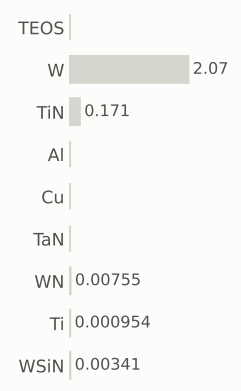

gases emitted (g)

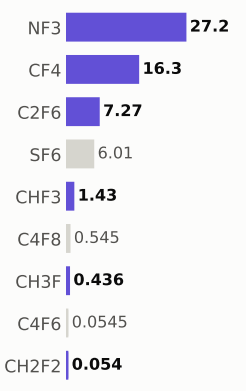

Step #23560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,504.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

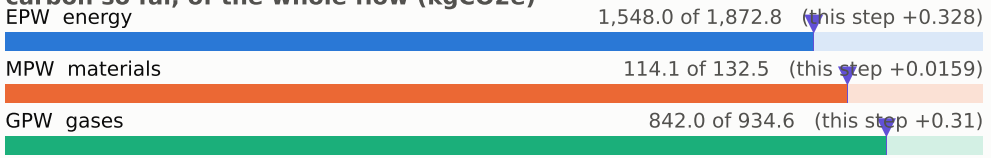

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

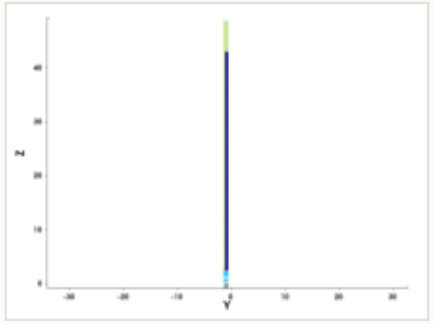

y cut at -1.035 µm

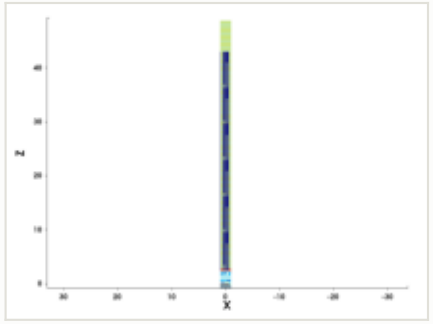

mask for this step

no mask for this step

steps by process area

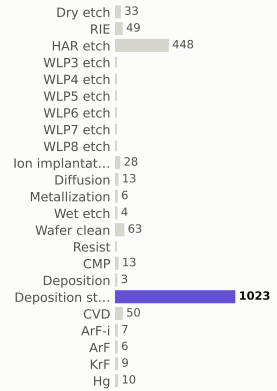

materials deposited (g)

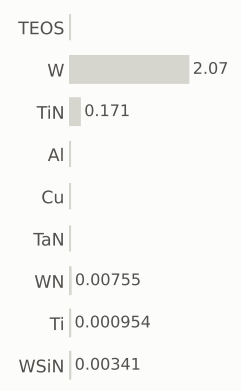

gases emitted (g)

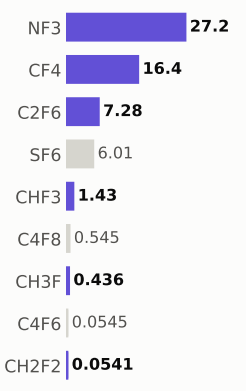

Step #23570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,504.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

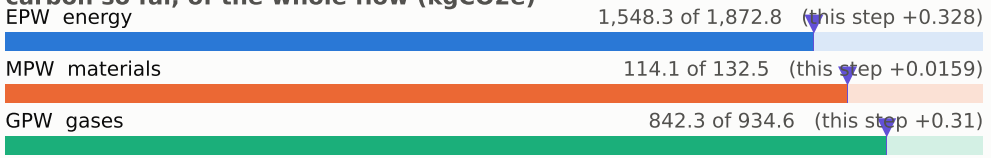

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

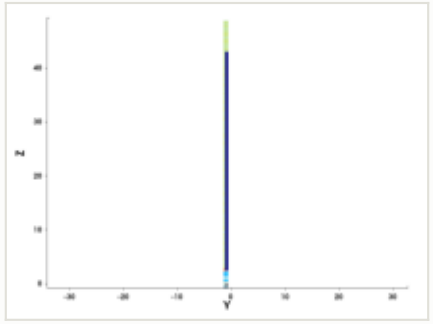

y cut at -1.035 µm

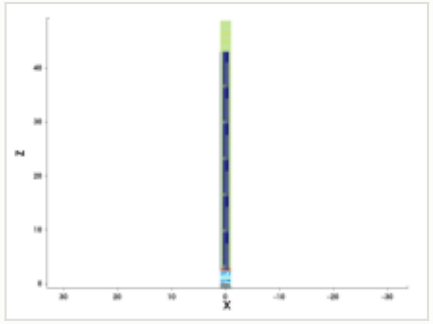

mask for this step

no mask for this step

steps by process area

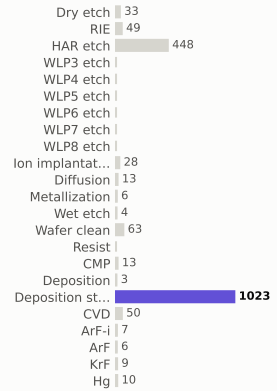

materials deposited (g)

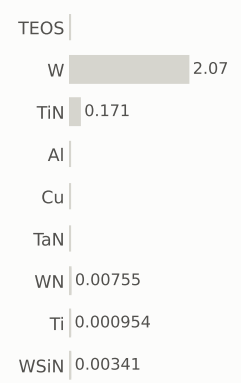

gases emitted (g)

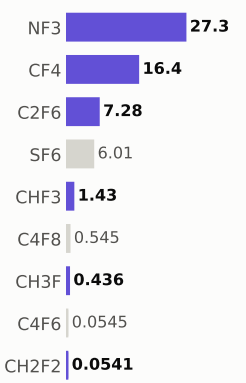

Step #23580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,505.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

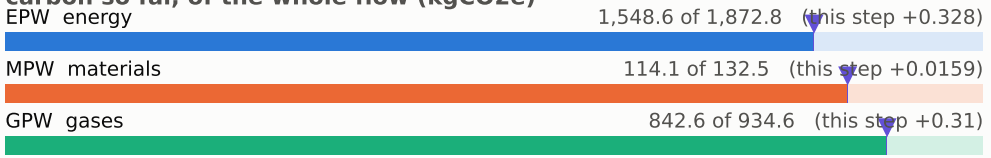

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

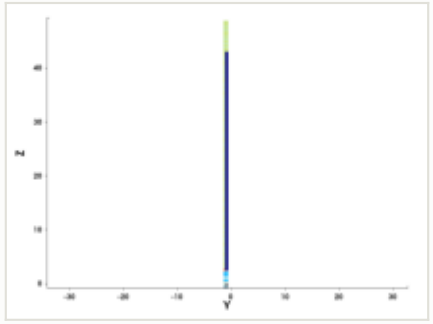

y cut at -1.035 µm

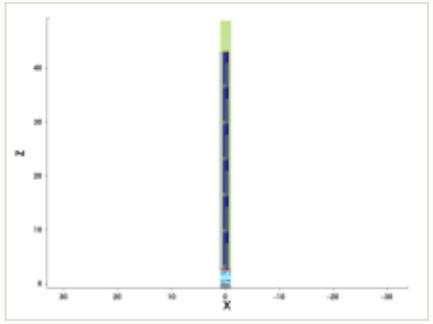

mask for this step

no mask for this step

steps by process area

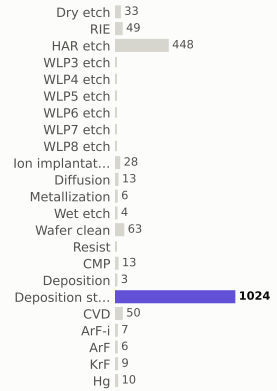

materials deposited (g)

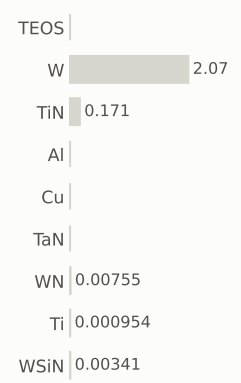

gases emitted (g)

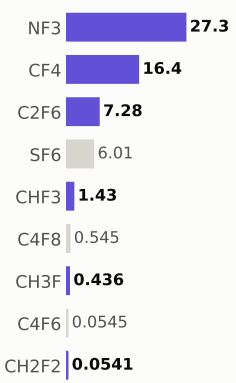

Step #23590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,506.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

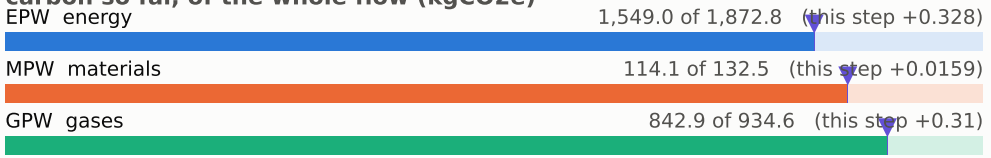

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

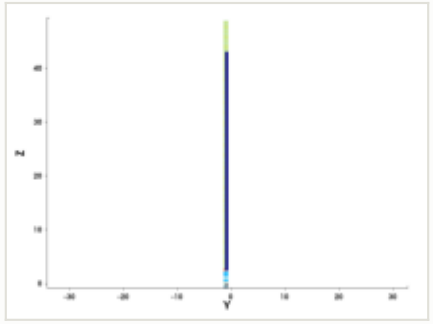

y cut at -1.035 µm

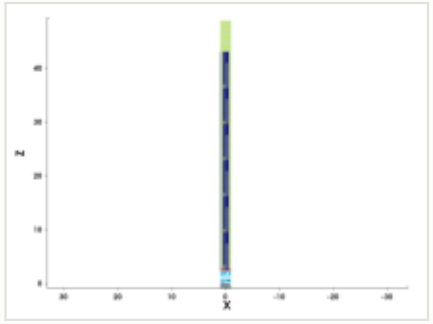

mask for this step

no mask for this step

steps by process area

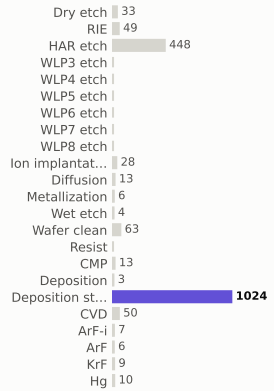

materials deposited (g)

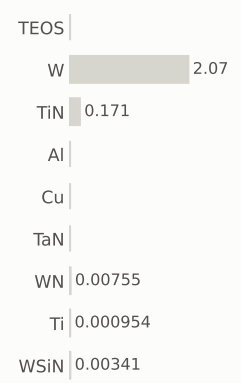

gases emitted (g)

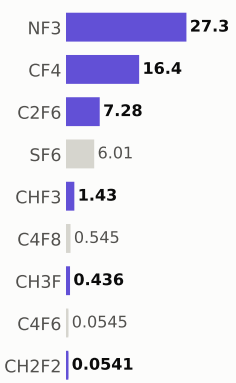

Step #23600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,506.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

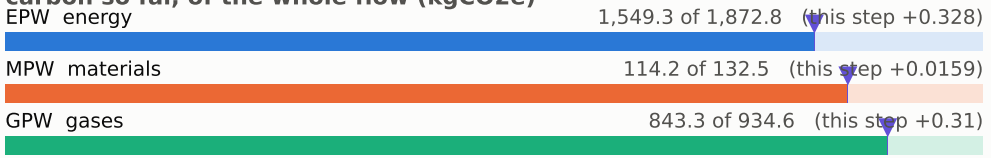

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

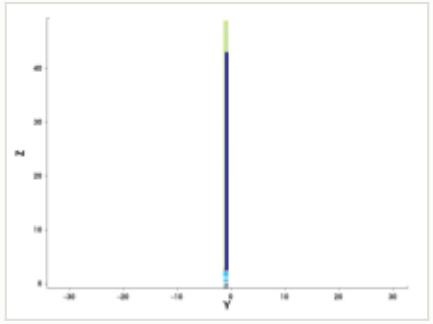

y cut at -1.035 µm

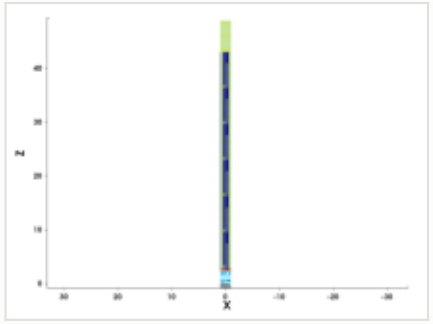

mask for this step

no mask for this step

steps by process area

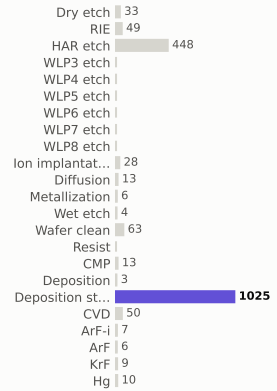

materials deposited (g)

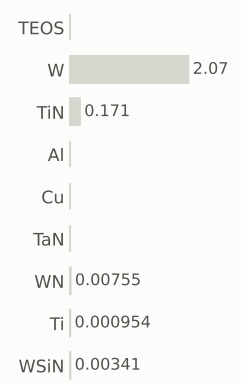

gases emitted (g)

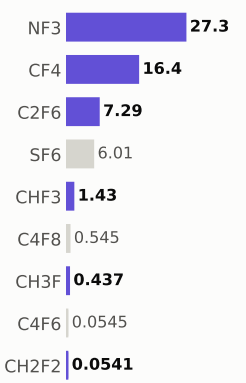

Step #23610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,507.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

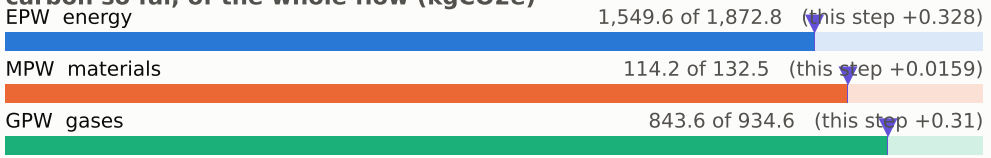

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

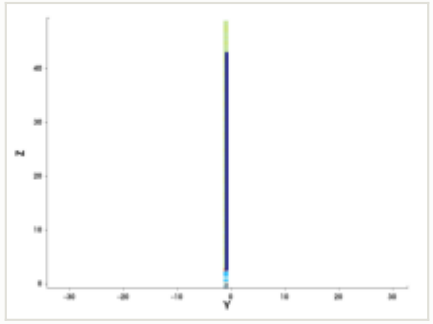

y cut at -1.035 µm

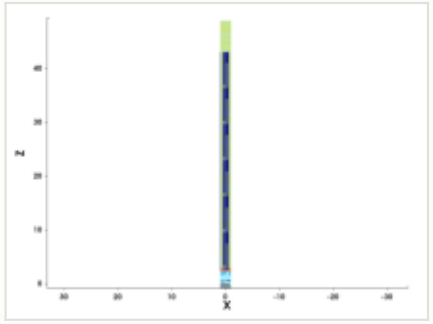

mask for this step

no mask for this step

steps by process area

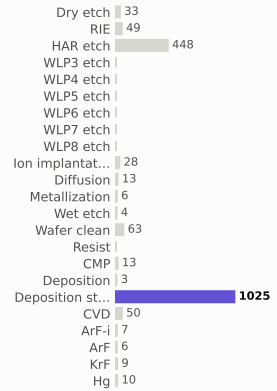

materials deposited (g)

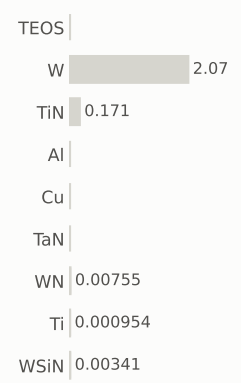

gases emitted (g)

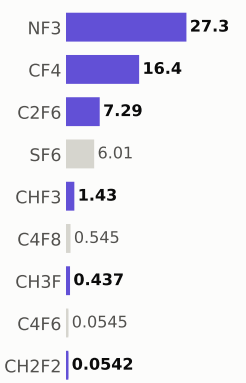

Step #23620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,508.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

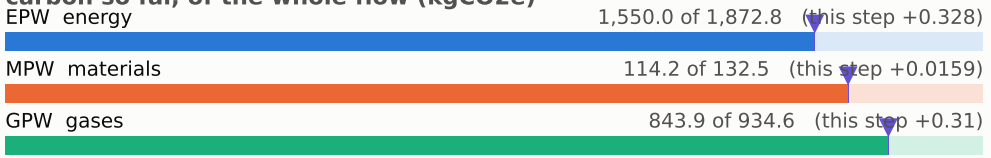

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

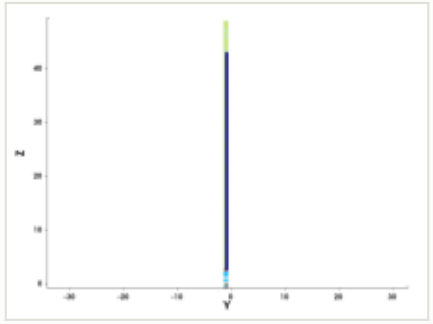

y cut at -1.035 µm

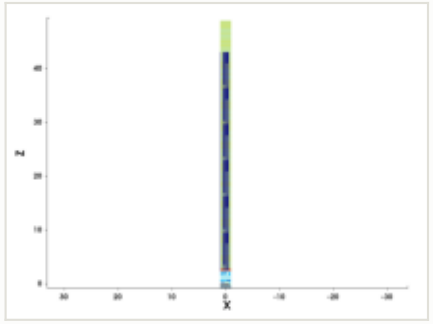

mask for this step

no mask for this step

steps by process area

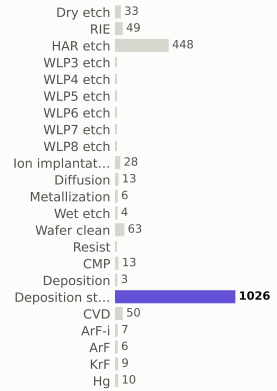

materials deposited (g)

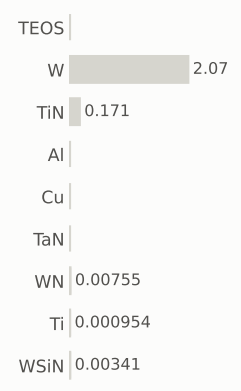

gases emitted (g)

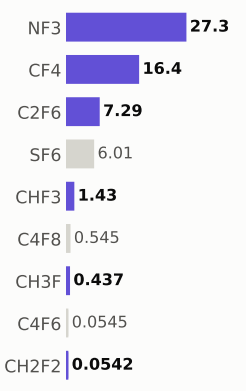

Step #23630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,508.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

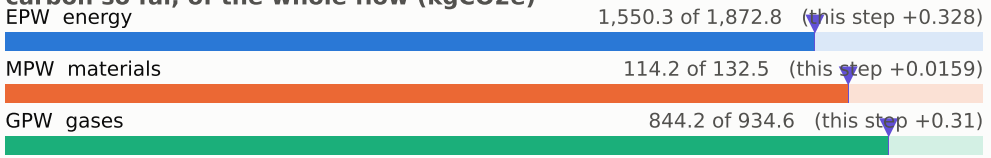

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

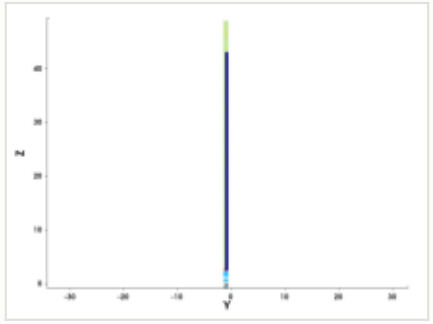

y cut at -1.035 µm

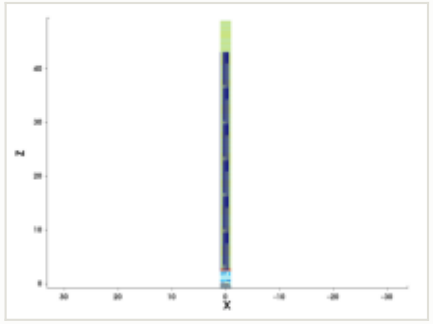

mask for this step

no mask for this step

steps by process area

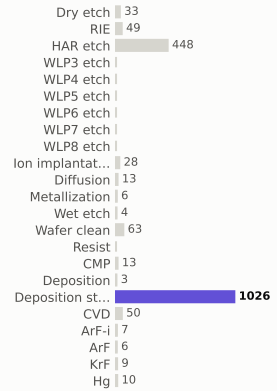

materials deposited (g)

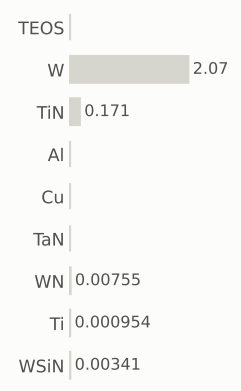

gases emitted (g)

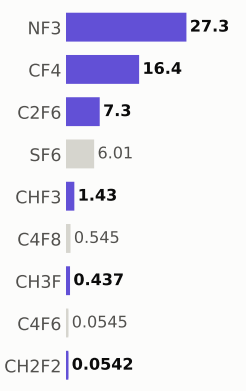

Step #23640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,509.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

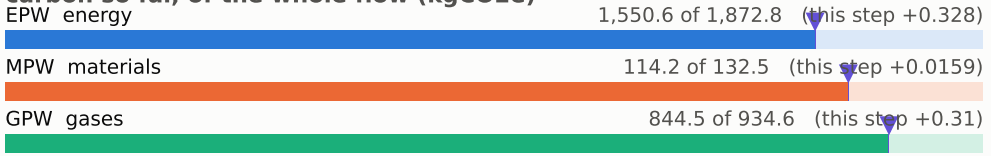

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

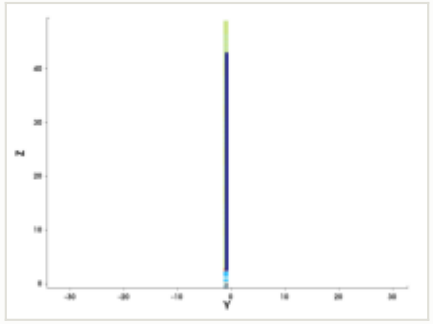

y cut at -1.035 µm

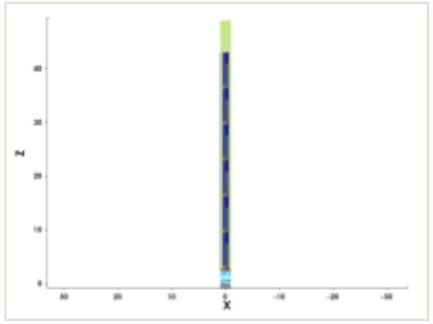

mask for this step

no mask for this step

steps by process area

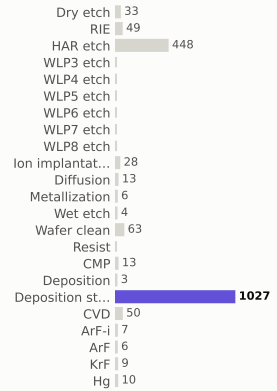

materials deposited (g)

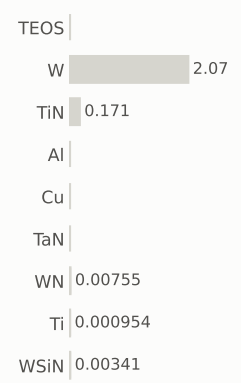

gases emitted (g)

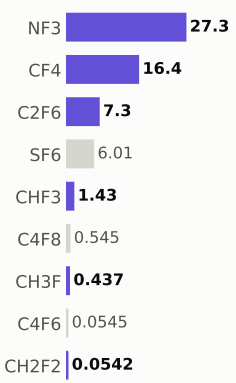

Step #23650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,510.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

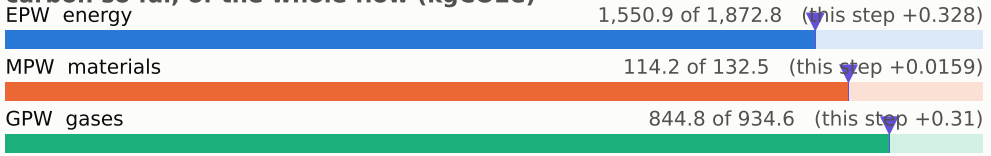

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

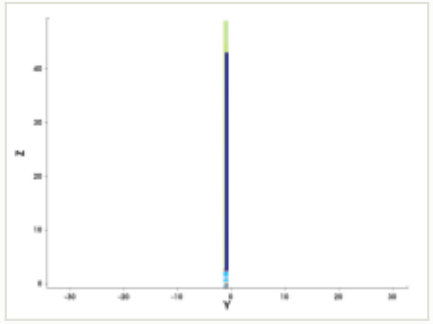

y cut at -1.035 µm

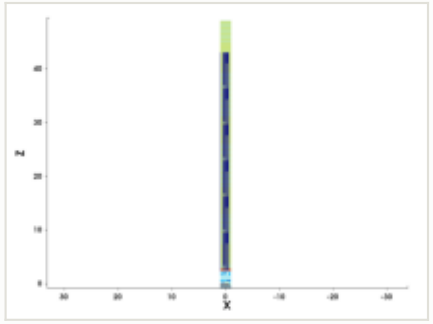

mask for this step

no mask for this step

steps by process area

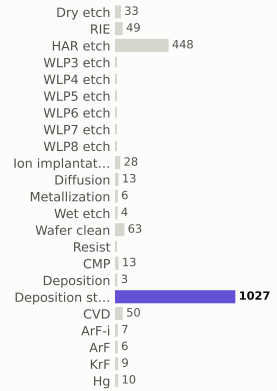

materials deposited (g)

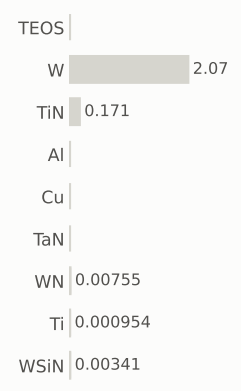

gases emitted (g)

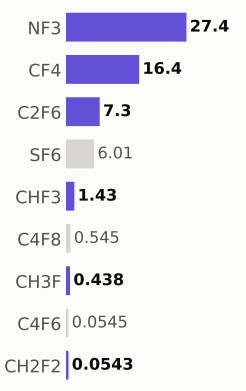

Step #23660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,510.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

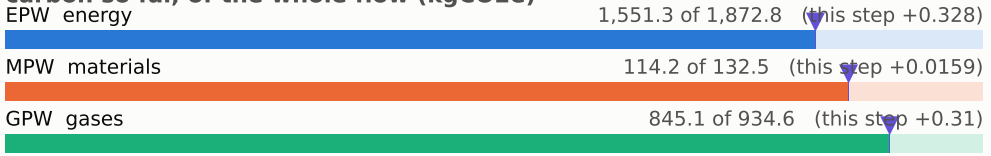

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

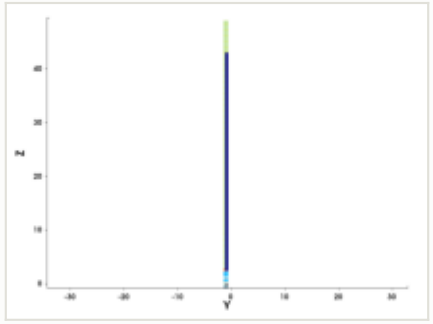

y cut at -1.035 µm

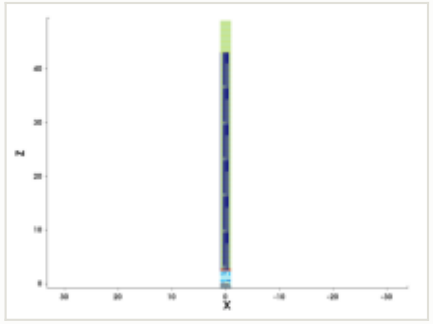

mask for this step

no mask for this step

steps by process area

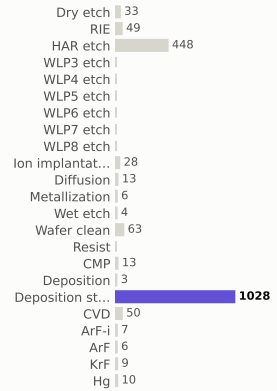

materials deposited (g)

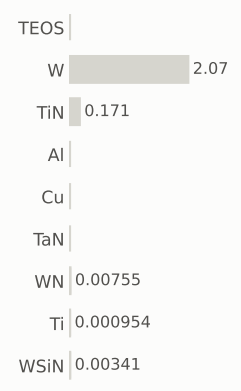

gases emitted (g)

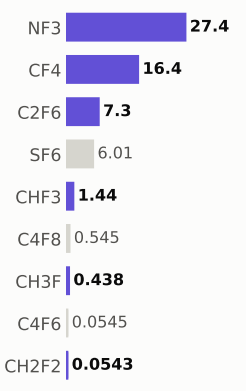

Step #23670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,511.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

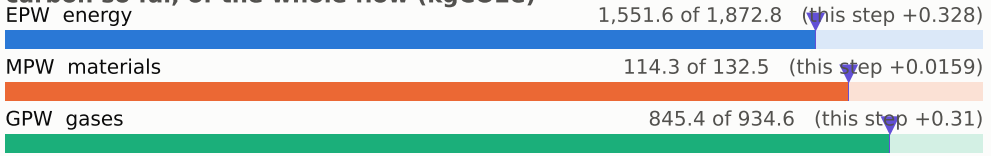

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

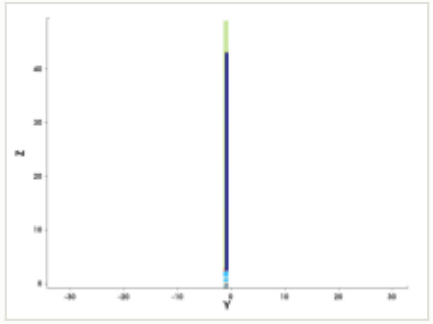

y cut at -1.035 µm

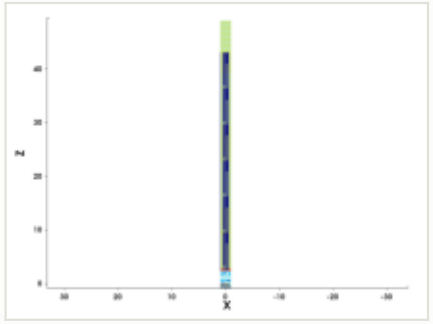

mask for this step

no mask for this step

steps by process area

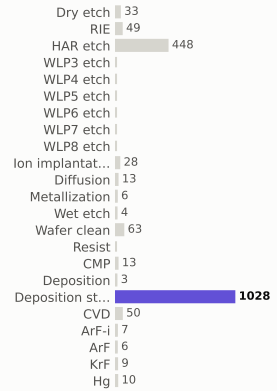

materials deposited (g)

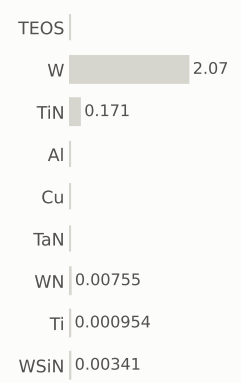

gases emitted (g)

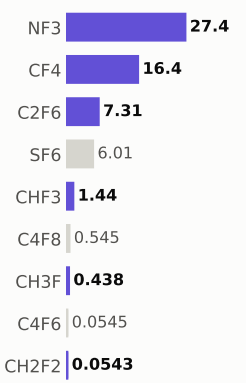

Step #23680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,511.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

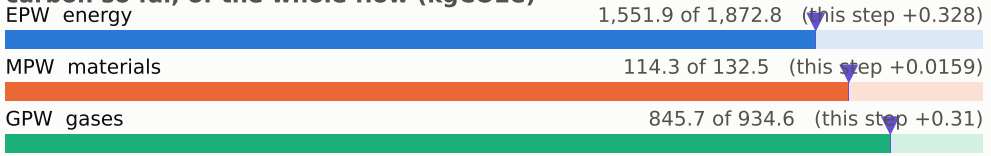

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

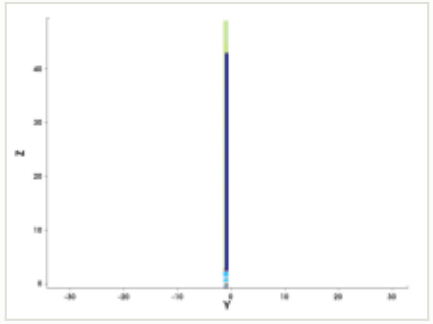

y cut at -1.035 µm

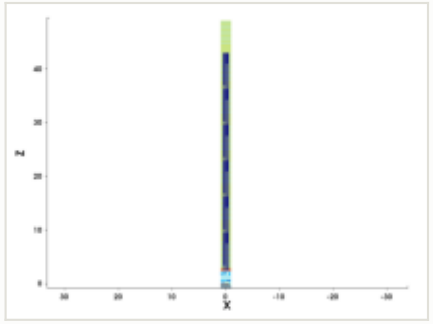

mask for this step

no mask for this step

steps by process area

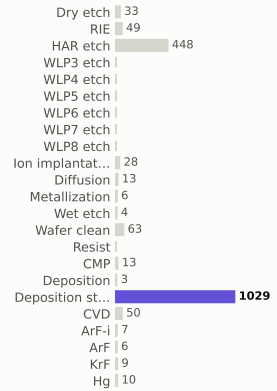

materials deposited (g)

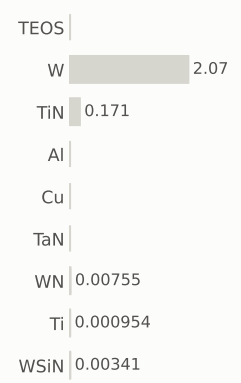

gases emitted (g)

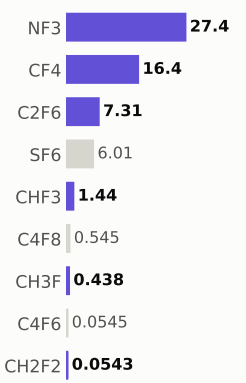

Step #23690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,512.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

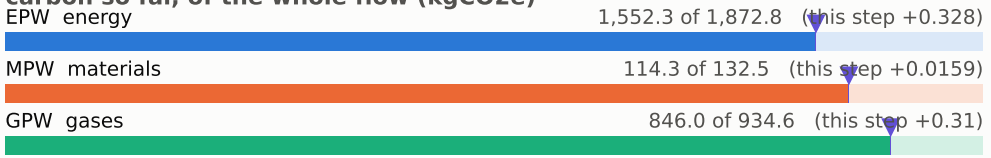

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

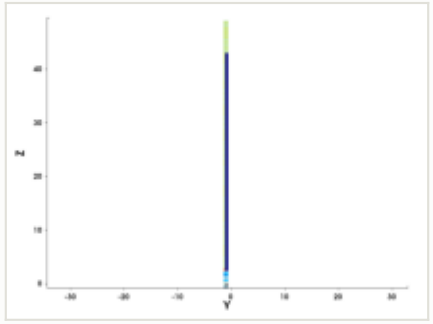

y cut at -1.035 µm

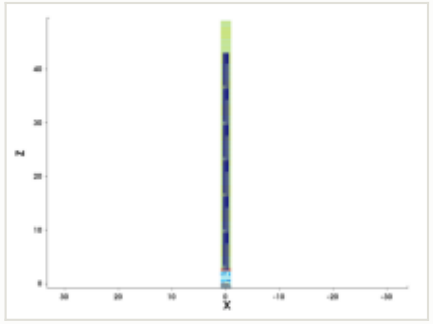

mask for this step

no mask for this step

steps by process area

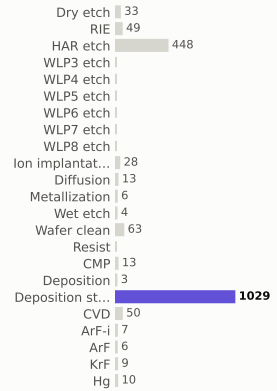

materials deposited (g)

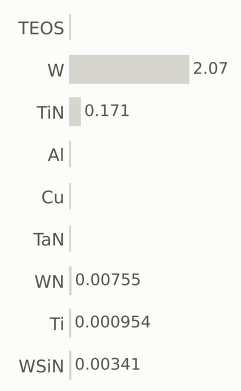

gases emitted (g)

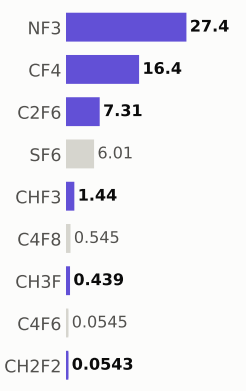

Step #23700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,513.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

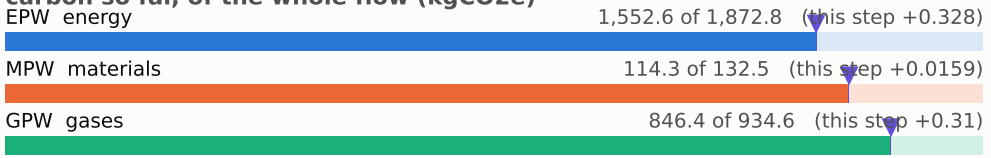

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

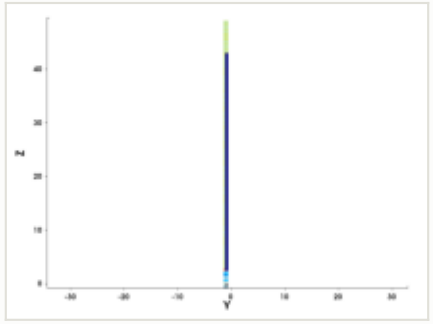

y cut at -1.035 µm

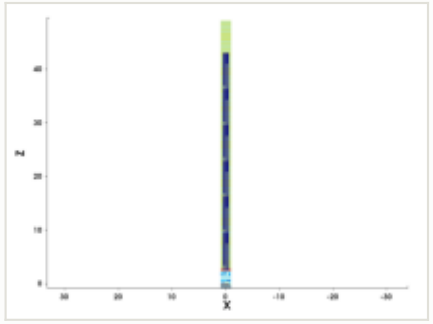

mask for this step

no mask for this step

steps by process area

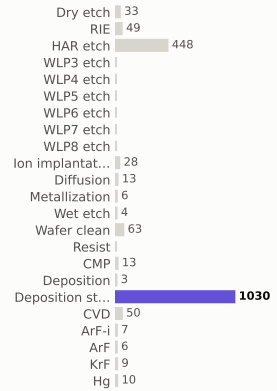

materials deposited (g)

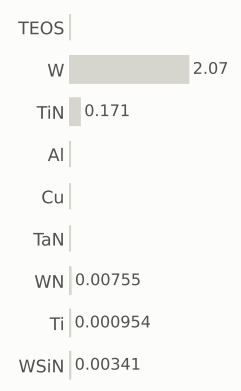

gases emitted (g)

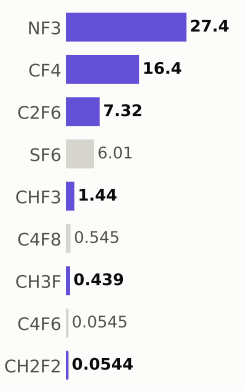

Step #23710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,513.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

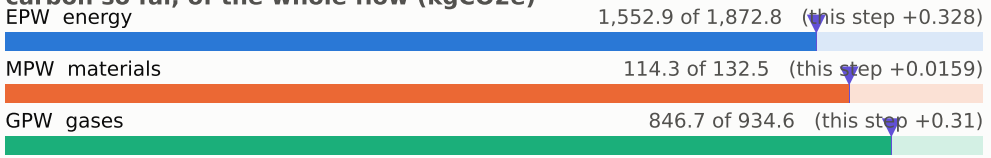

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

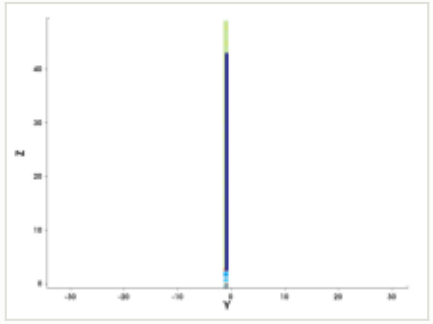

y cut at -1.035 µm

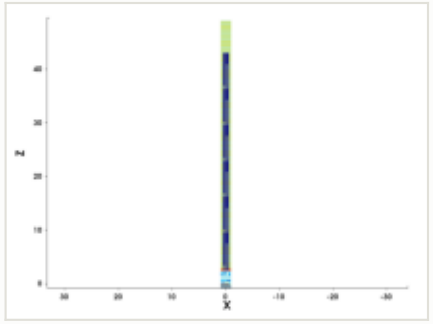

mask for this step

no mask for this step

steps by process area

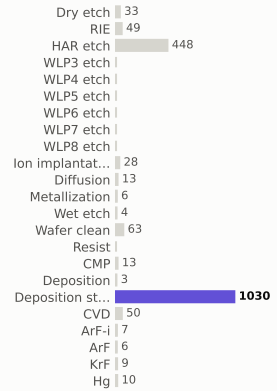

materials deposited (g)

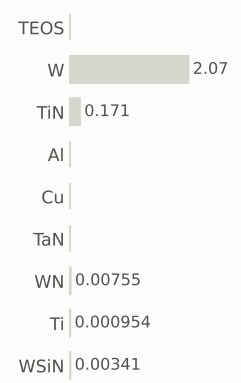

gases emitted (g)

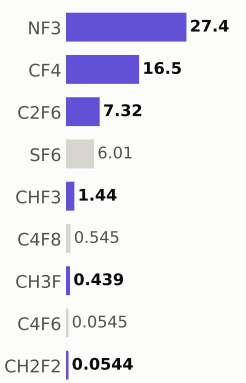

Step #23720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,514.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

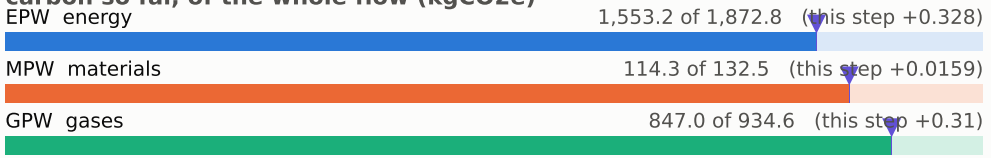

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

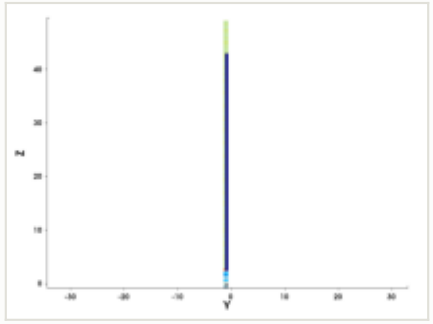

y cut at -1.035 µm

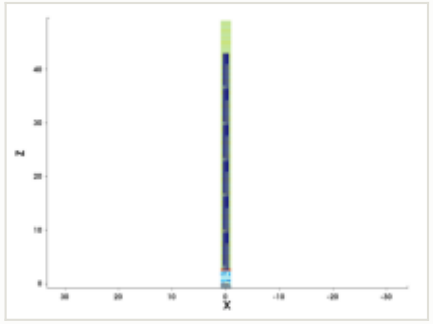

mask for this step

no mask for this step

steps by process area

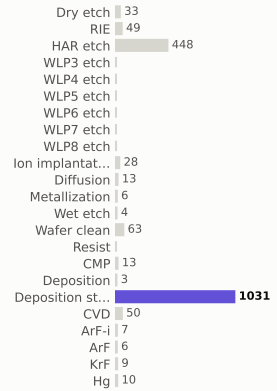

materials deposited (g)

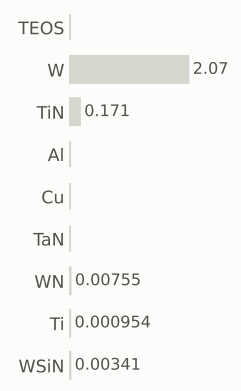

gases emitted (g)

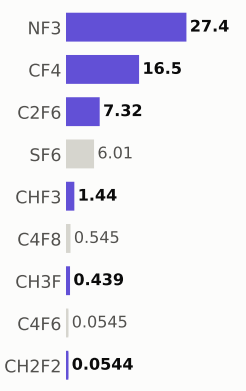

Step #23730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,515.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

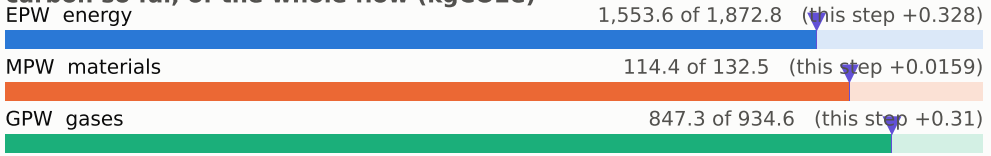

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

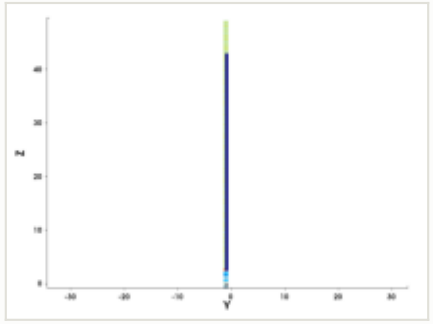

y cut at -1.035 µm

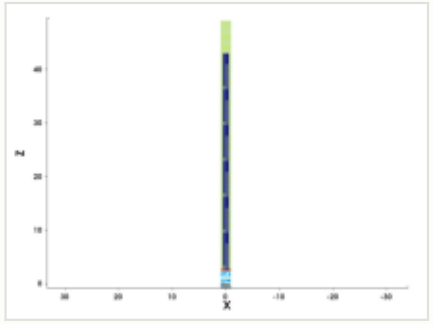

mask for this step

no mask for this step

steps by process area

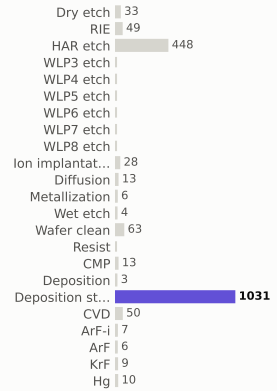

materials deposited (g)

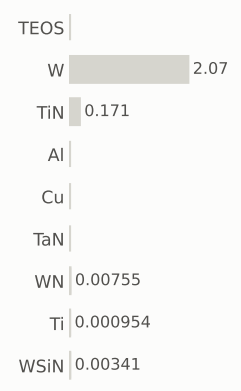

gases emitted (g)

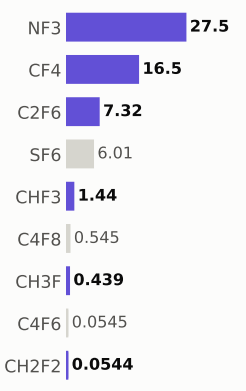

Step #23740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,515.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

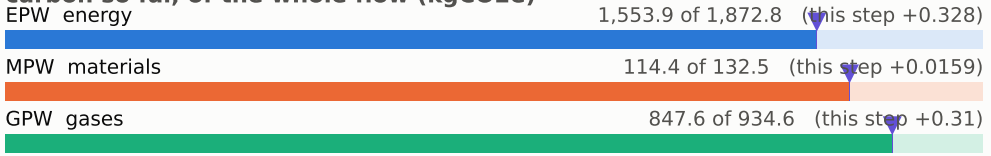

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

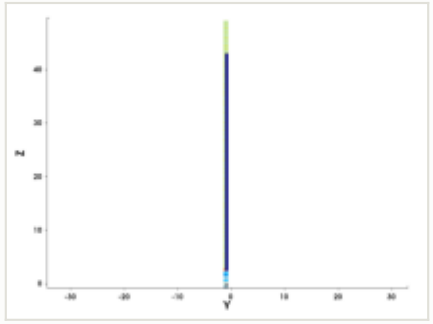

y cut at -1.035 µm

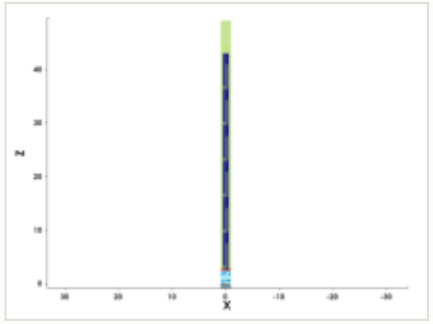

mask for this step

no mask for this step

steps by process area

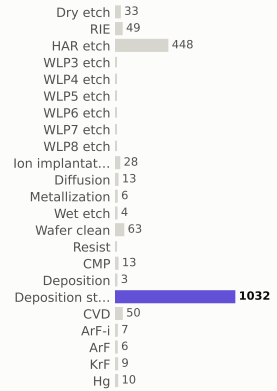

materials deposited (g)

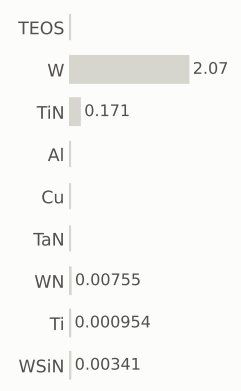

gases emitted (g)

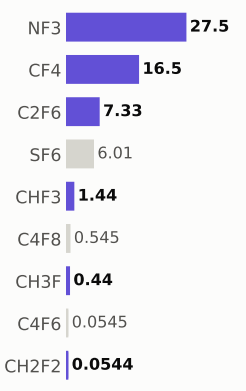

Step #23750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,516.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

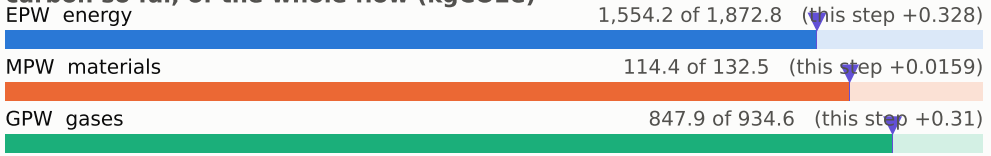

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

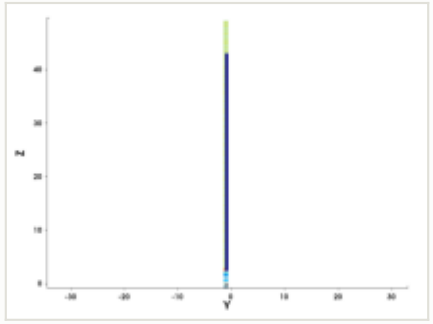

y cut at -1.035 µm

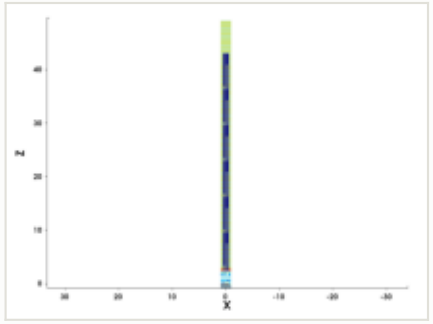

mask for this step

no mask for this step

steps by process area

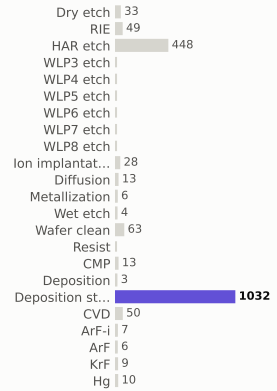

materials deposited (g)

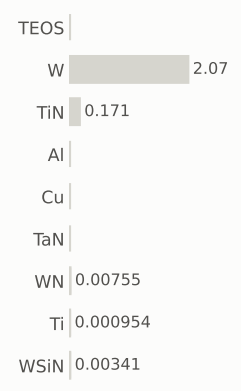

gases emitted (g)

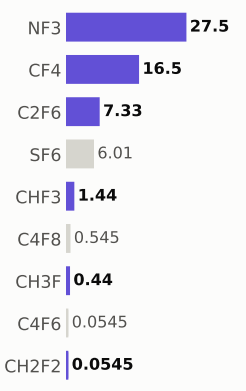

Step #23760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,517.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

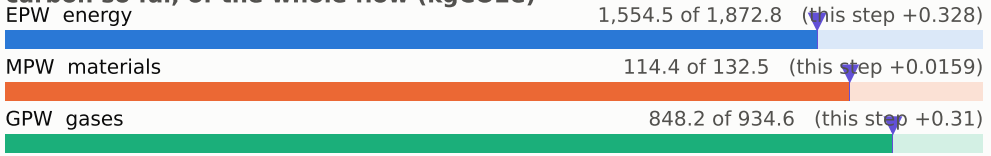

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

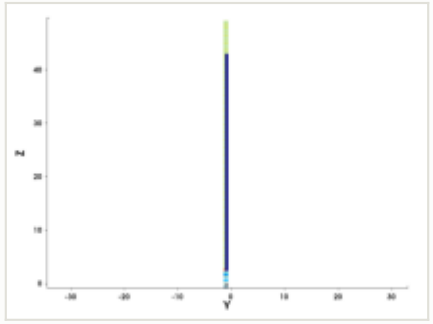

y cut at -1.035 µm

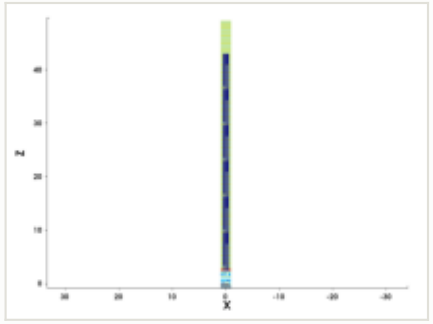

mask for this step

no mask for this step

steps by process area

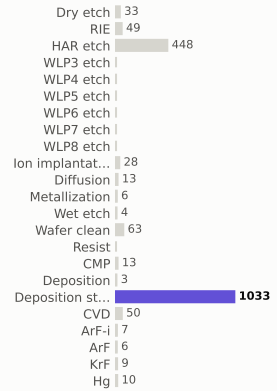

materials deposited (g)

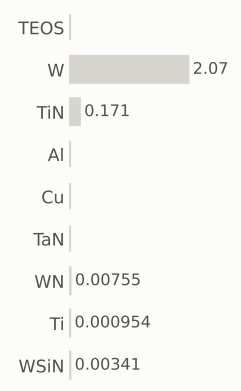

gases emitted (g)

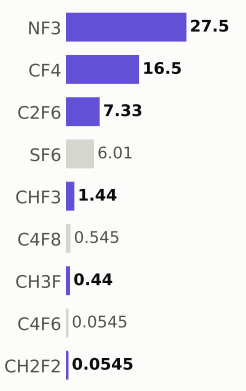

Step #23770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,517.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

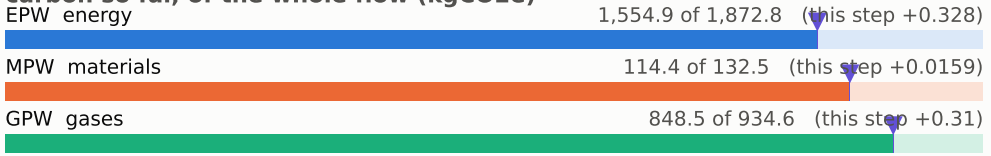

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

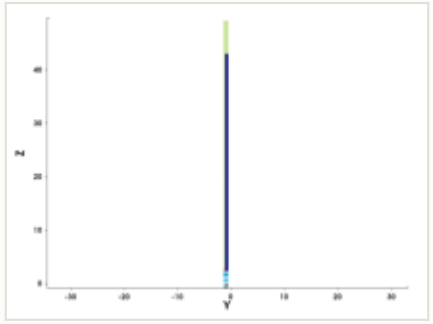

y cut at -1.035 µm

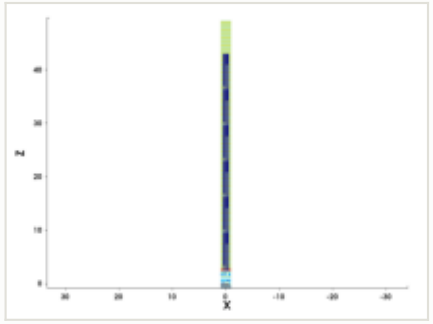

mask for this step

no mask for this step

steps by process area

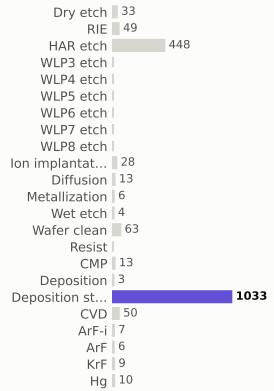

materials deposited (g)

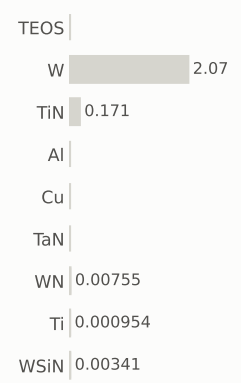

gases emitted (g)

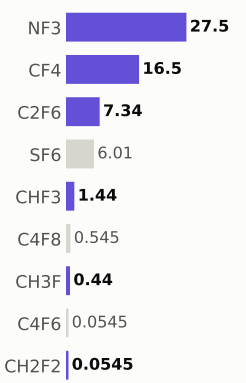

Step #23780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,518.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

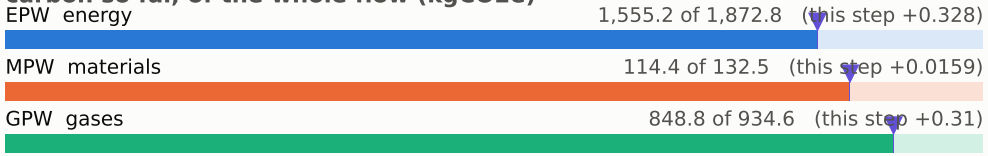

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

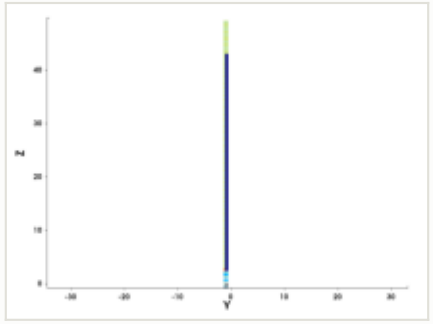

y cut at -1.035 µm

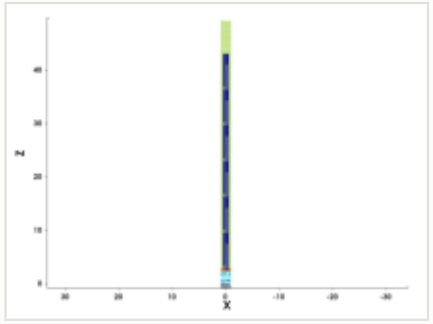

mask for this step

no mask for this step

steps by process area

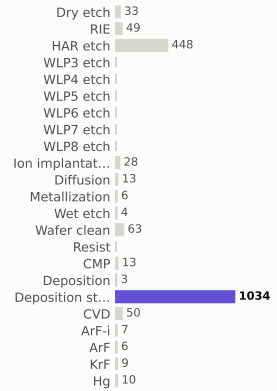

materials deposited (g)

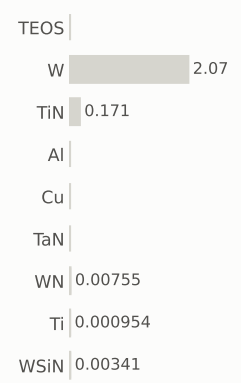

gases emitted (g)

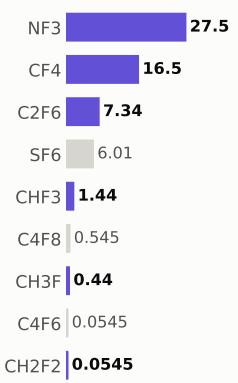

Step #23790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,519.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

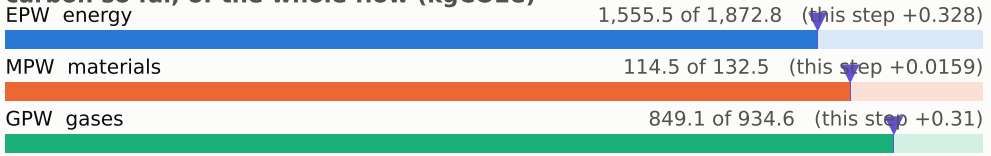

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

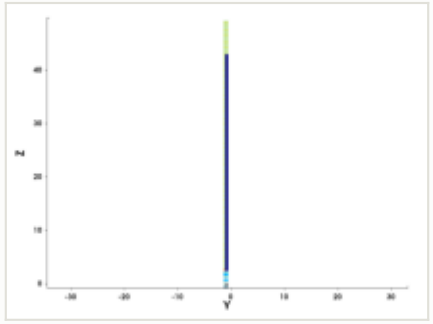

y cut at -1.035 µm

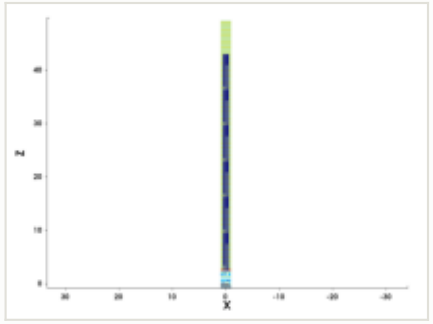

mask for this step

no mask for this step

steps by process area

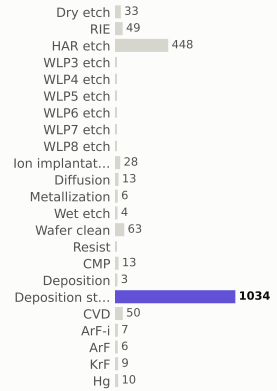

materials deposited (g)

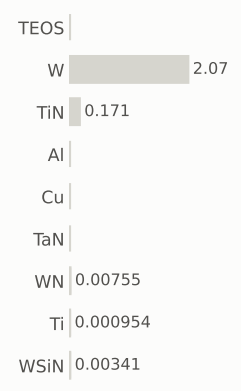

gases emitted (g)

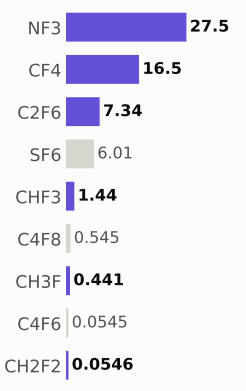

Step #23800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,519.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

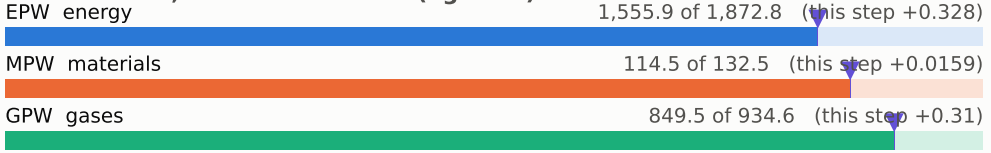

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

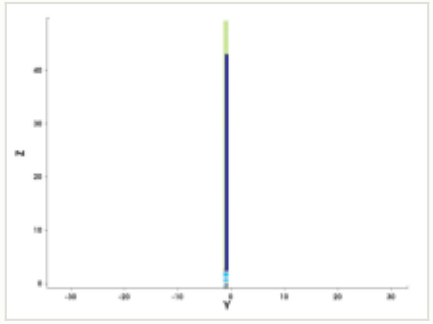

y cut at -1.035 µm

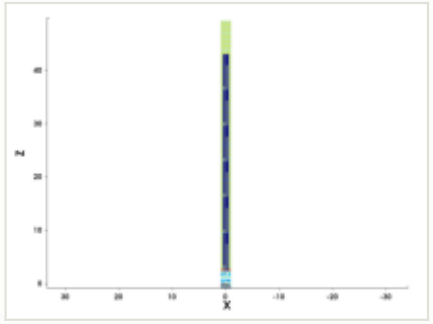

mask for this step

no mask for this step

steps by process area

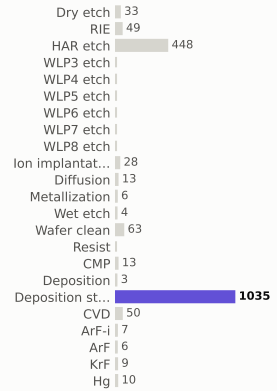

materials deposited (g)

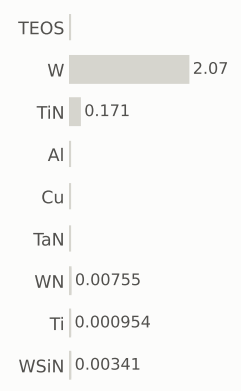

gases emitted (g)

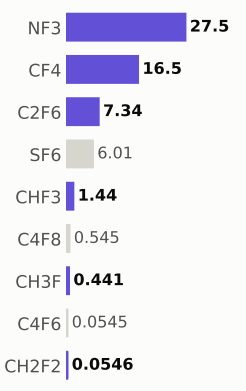

Step #23810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,520.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

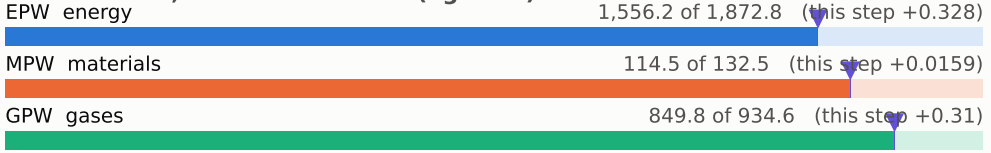

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

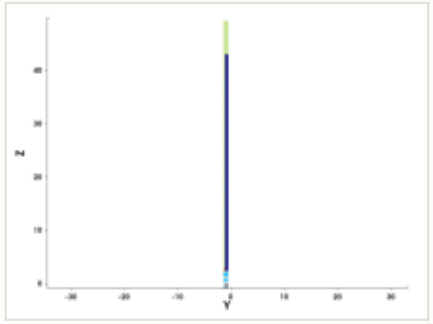

y cut at -1.035 µm

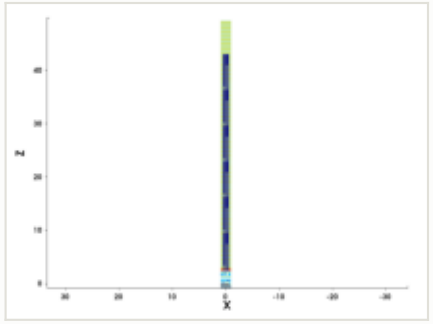

mask for this step

no mask for this step

steps by process area

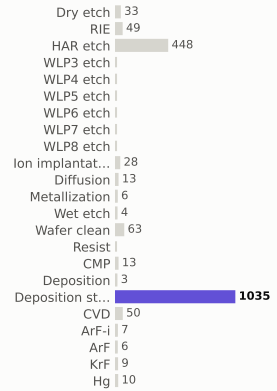

materials deposited (g)

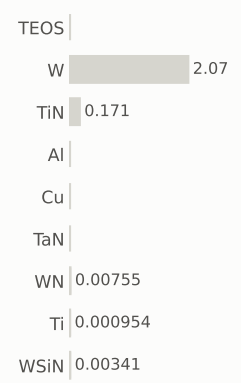

gases emitted (g)

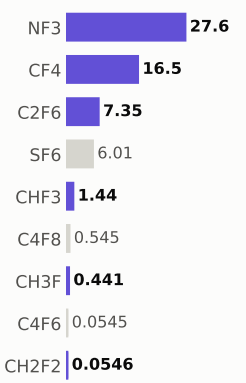

Step #23820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,521.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

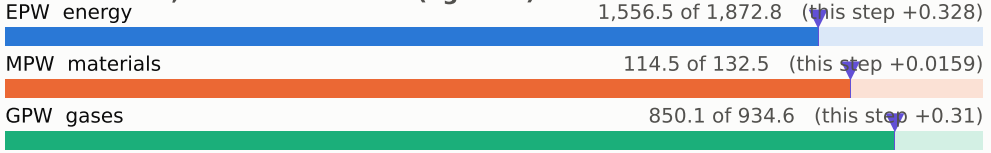

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

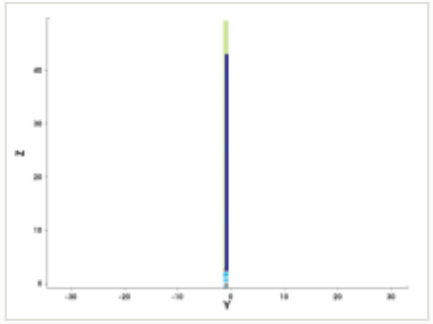

y cut at -1.035 µm

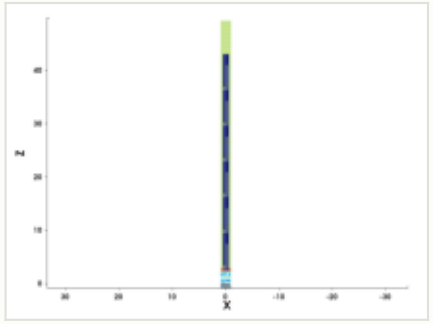

mask for this step

no mask for this step

steps by process area

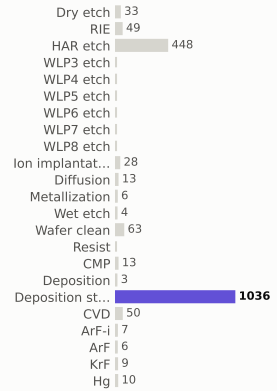

materials deposited (g)

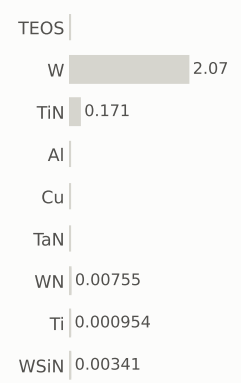

gases emitted (g)

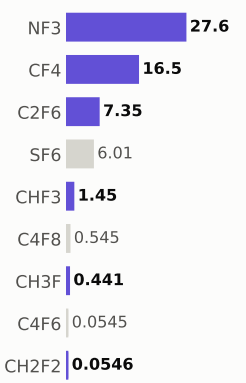

Step #23830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,521.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

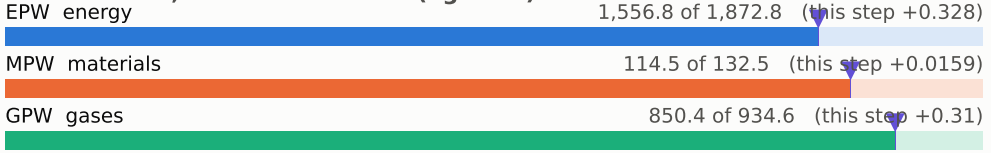

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

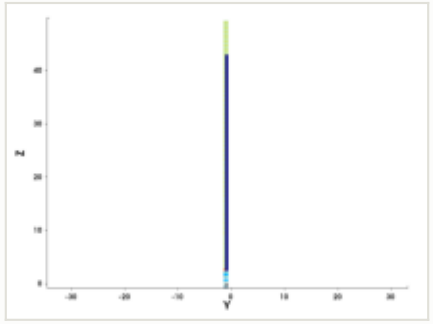

y cut at -1.035 µm

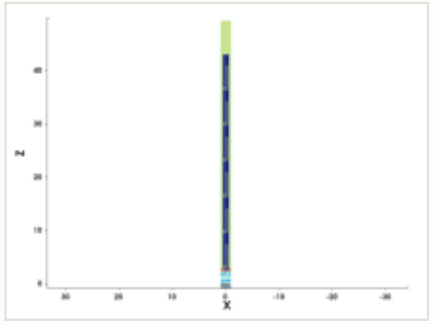

mask for this step

no mask for this step

steps by process area

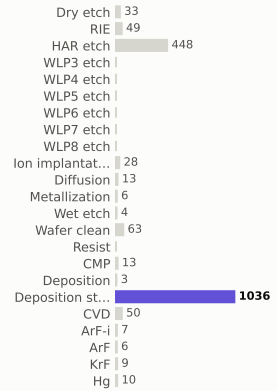

materials deposited (g)

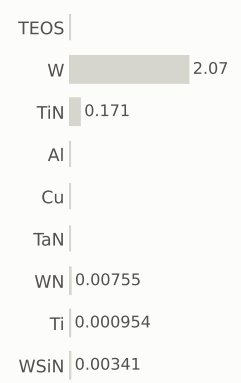

gases emitted (g)

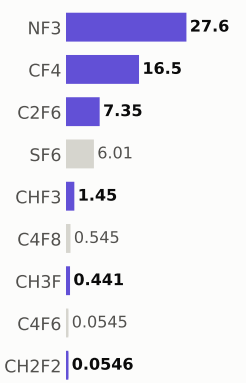

Step #23840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,522.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

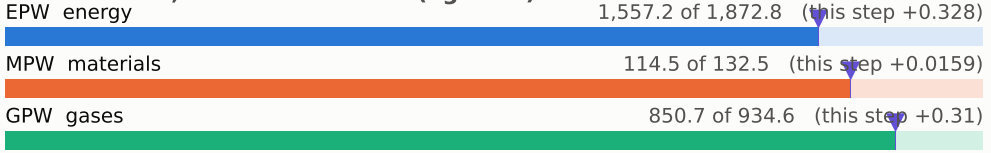

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

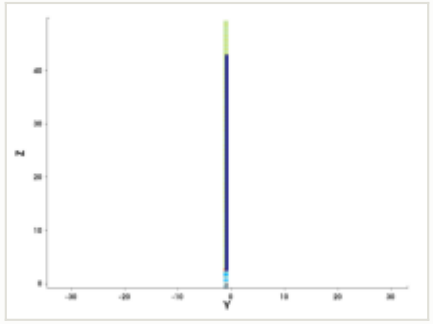

y cut at -1.035 µm

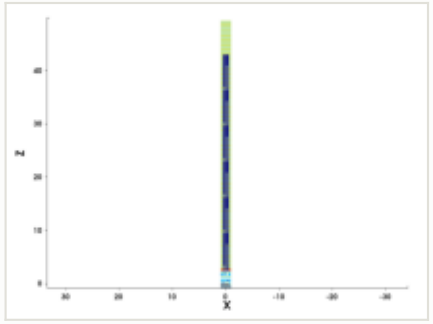

mask for this step

no mask for this step

steps by process area

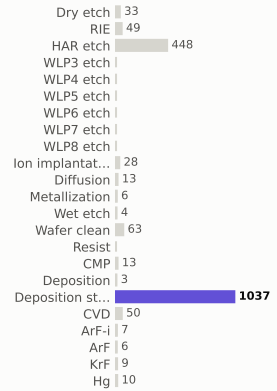

materials deposited (g)

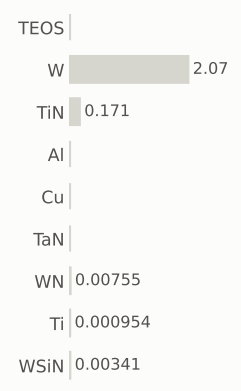

gases emitted (g)

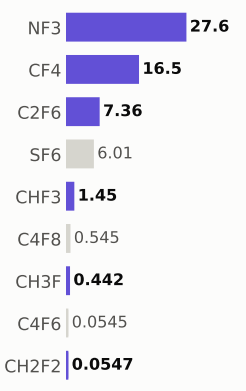

Step #23850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,523.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

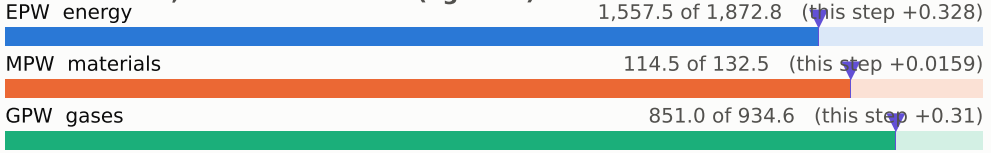

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

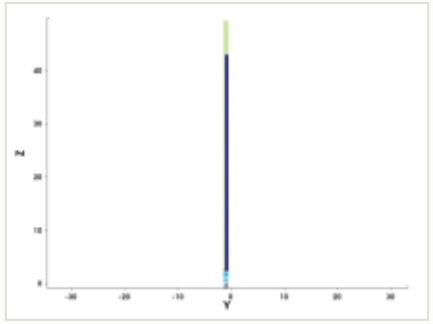

y cut at -1.035 µm

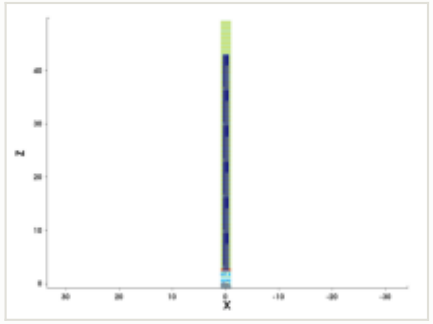

mask for this step

no mask for this step

steps by process area

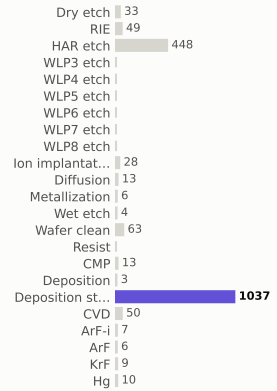

materials deposited (g)

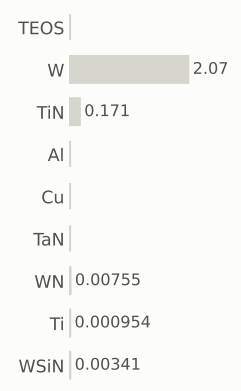

gases emitted (g)

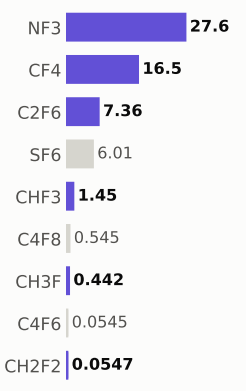

Step #23860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,523.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

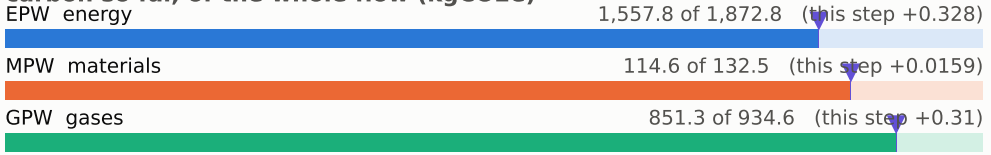

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

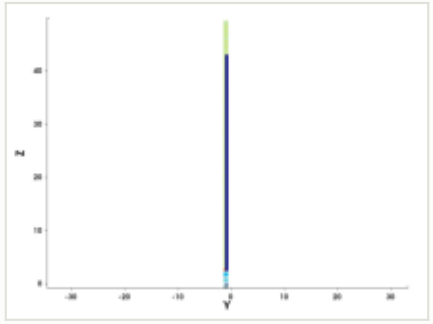

y cut at -1.035 µm

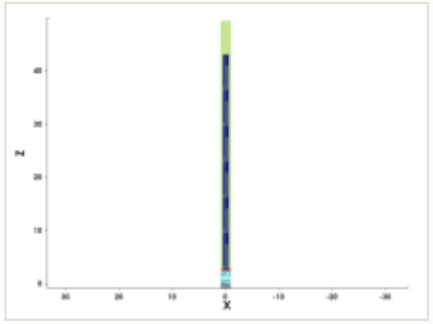

mask for this step

no mask for this step

steps by process area

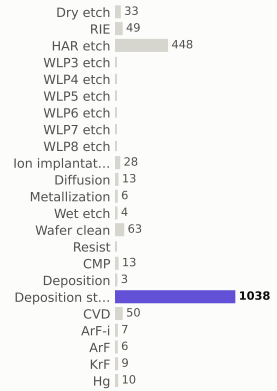

materials deposited (g)

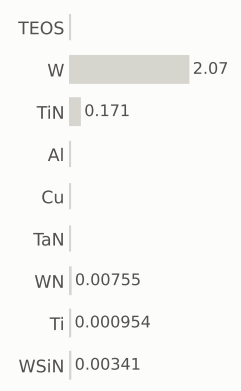

gases emitted (g)

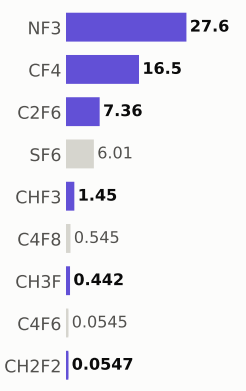

Step #23870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,524.4	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

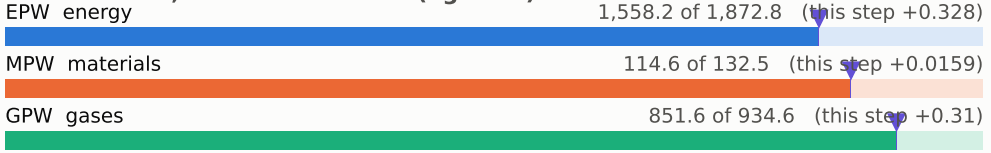

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

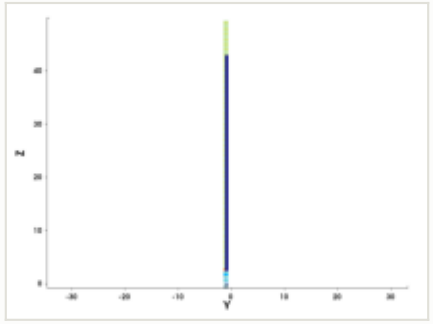

y cut at -1.035 µm

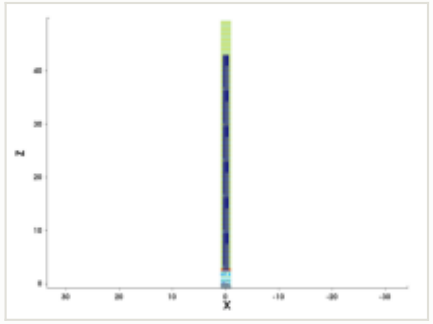

mask for this step

no mask for this step

steps by process area

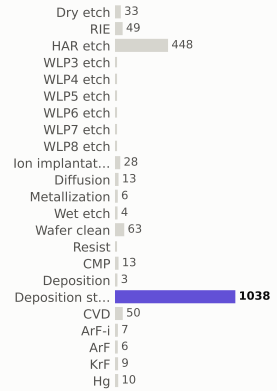

materials deposited (g)

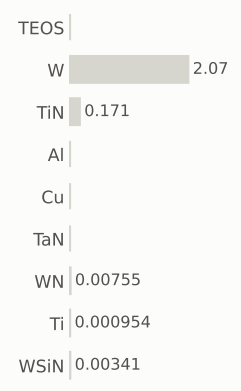

gases emitted (g)

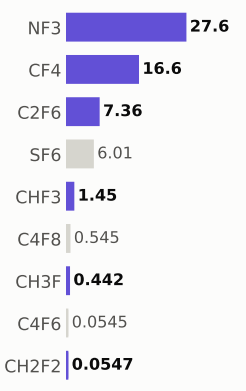

Step #23880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,525.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

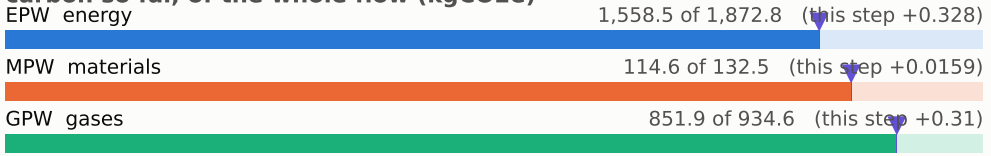

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

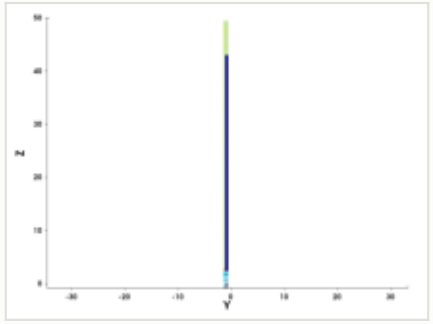

y cut at -1.035 µm

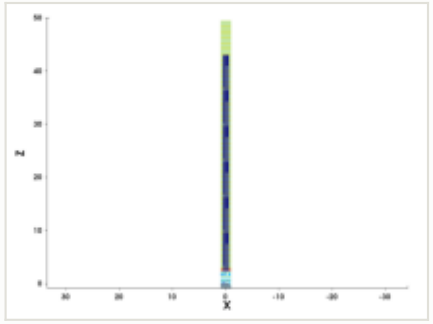

mask for this step

no mask for this step

steps by process area

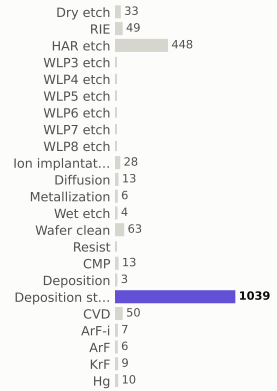

materials deposited (g)

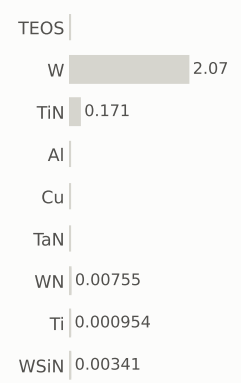

gases emitted (g)

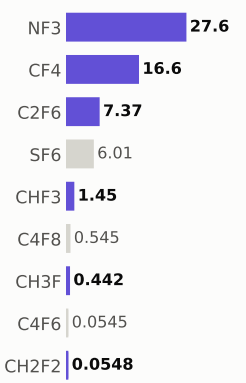

Step #23890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,525.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

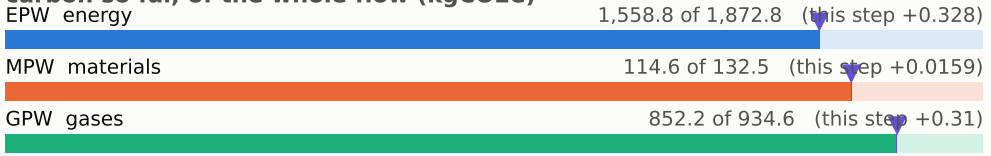

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

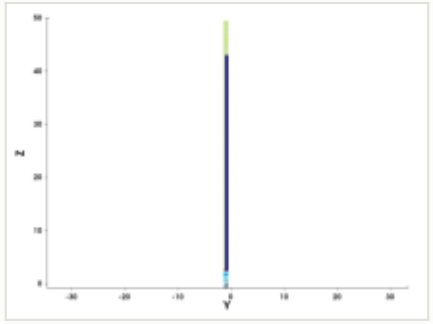

y cut at -1.035 µm

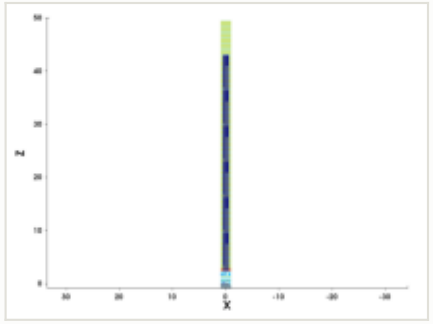

mask for this step

no mask for this step

steps by process area

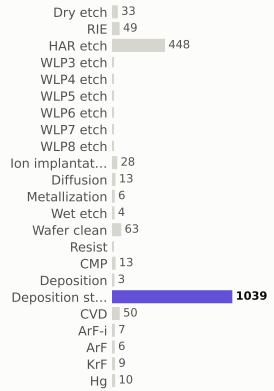

materials deposited (g)

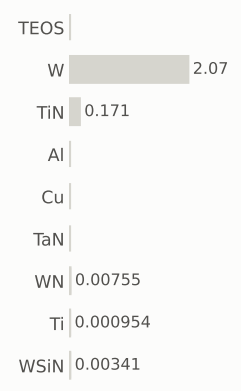

gases emitted (g)

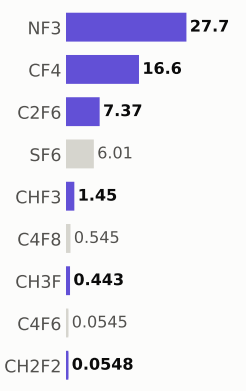

Step #23900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,526.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

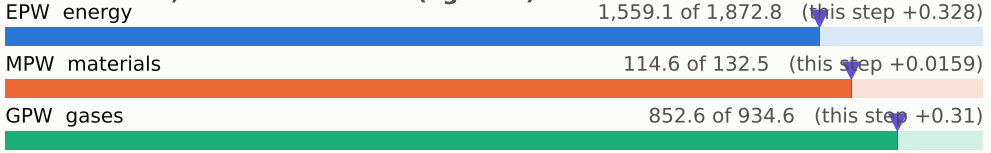

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

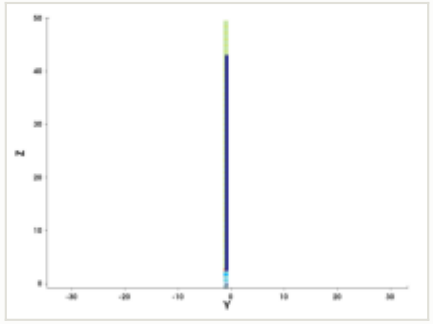

y cut at -1.035 µm

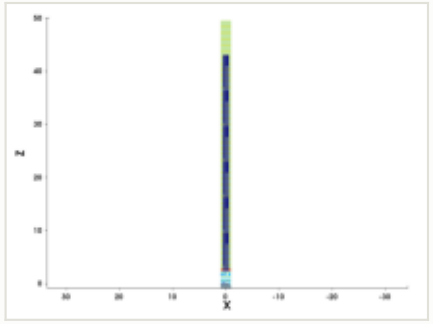

mask for this step

no mask for this step

steps by process area

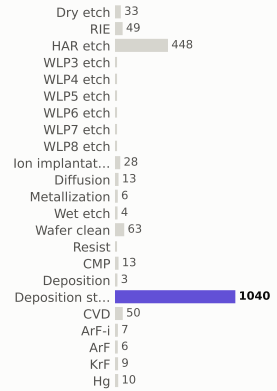

materials deposited (g)

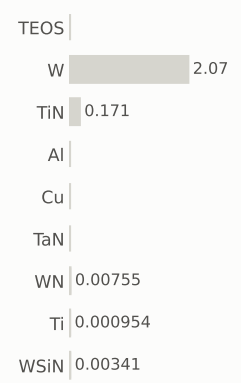

gases emitted (g)

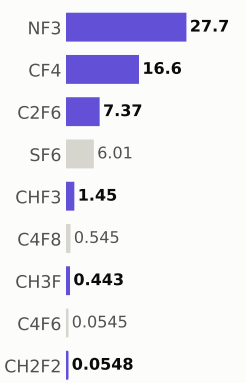

Step #23910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,527.0	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

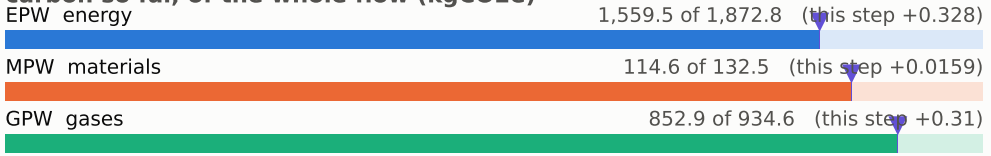

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

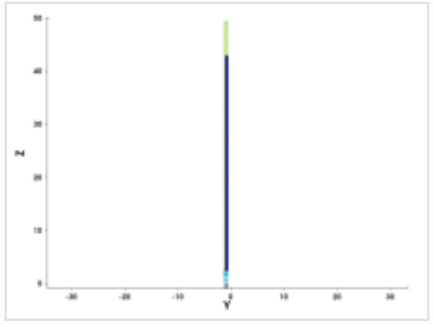

y cut at -1.035 µm

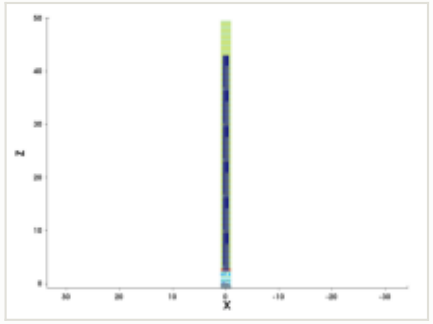

mask for this step

no mask for this step

steps by process area

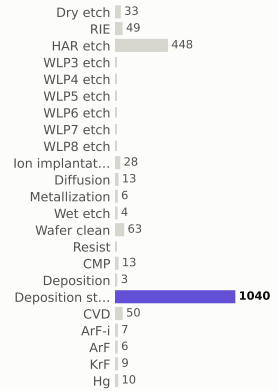

materials deposited (g)

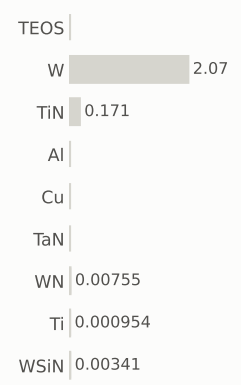

gases emitted (g)

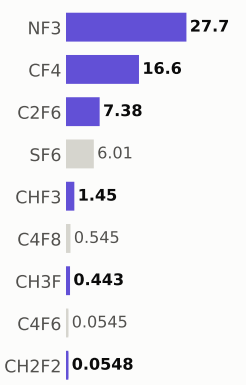

Step #23920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,527.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

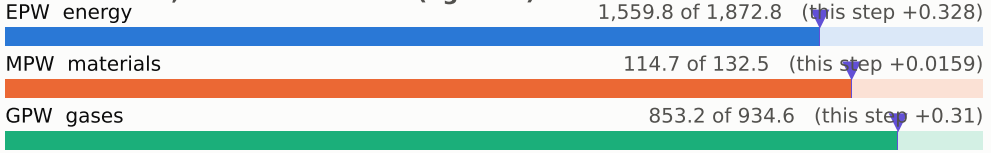

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

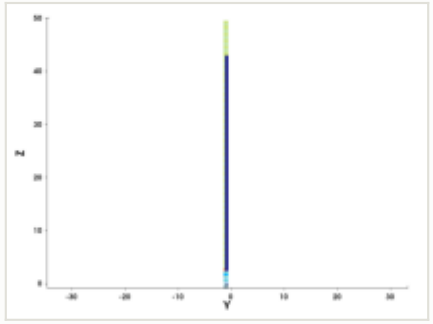

y cut at -1.035 µm

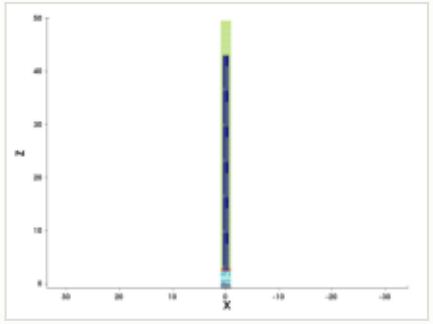

mask for this step

no mask for this step

steps by process area

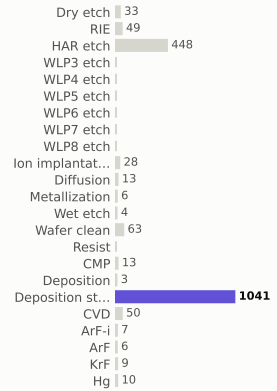

materials deposited (g)

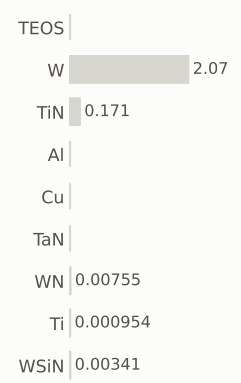

gases emitted (g)

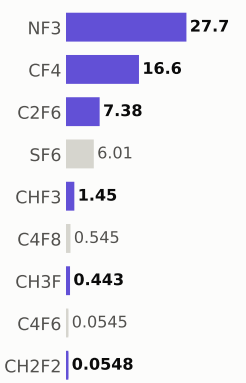

Step #23930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,528.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

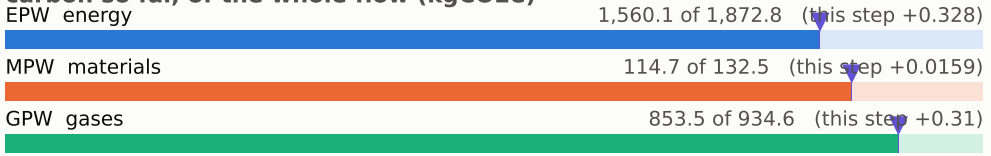

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

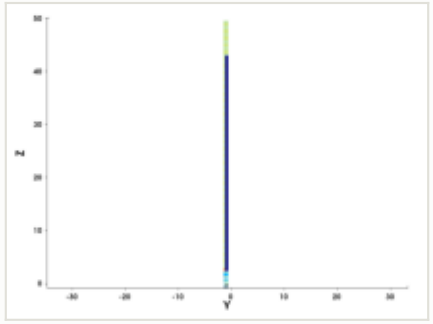

y cut at -1.035 µm

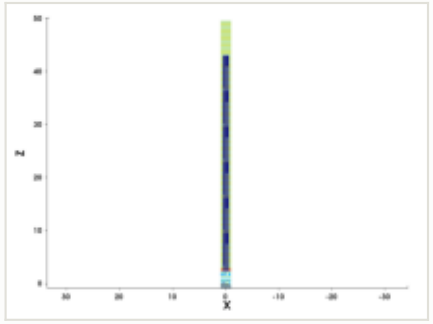

mask for this step

no mask for this step

steps by process area

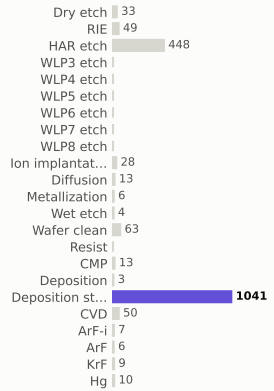

materials deposited (g)

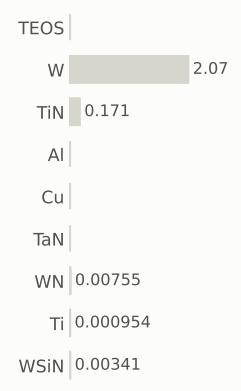

gases emitted (g)

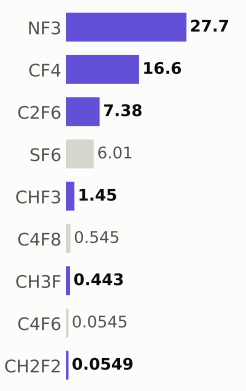

Step #23940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,528.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

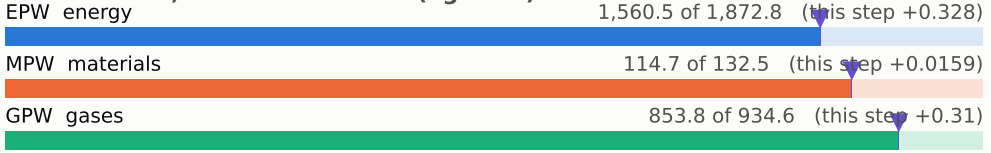

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

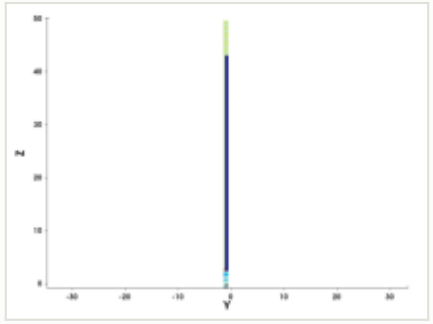

y cut at -1.035 µm

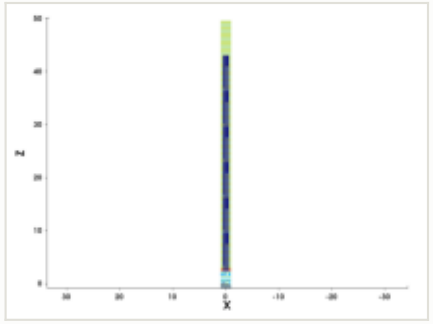

mask for this step

no mask for this step

steps by process area

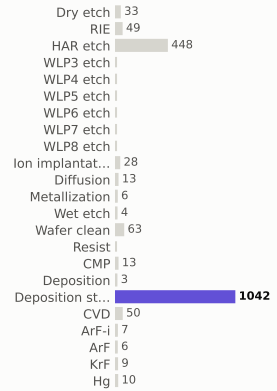

materials deposited (g)

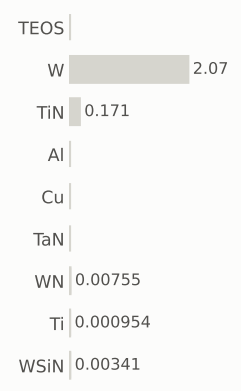

gases emitted (g)

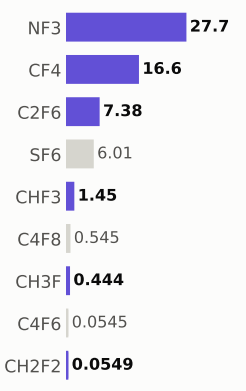

Step #23950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,529.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

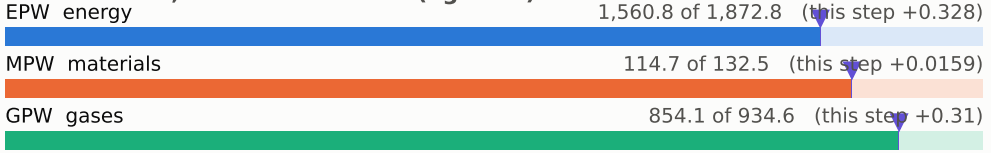

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

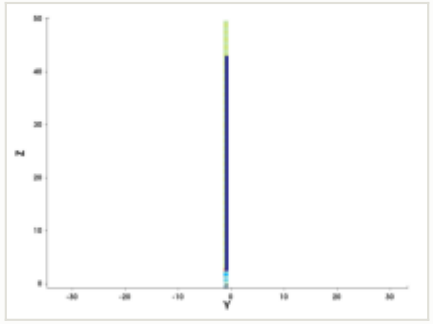

y cut at -1.035 µm

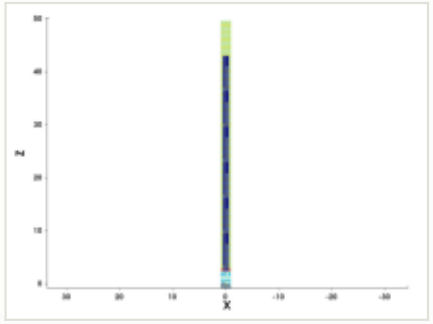

mask for this step

no mask for this step

steps by process area

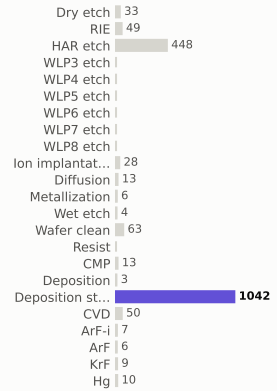

materials deposited (g)

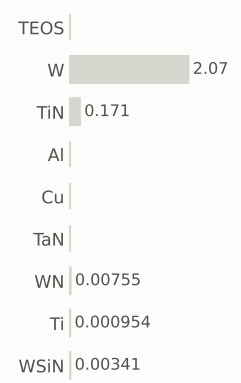

gases emitted (g)

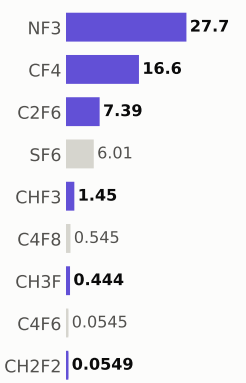

Step #23960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,530.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

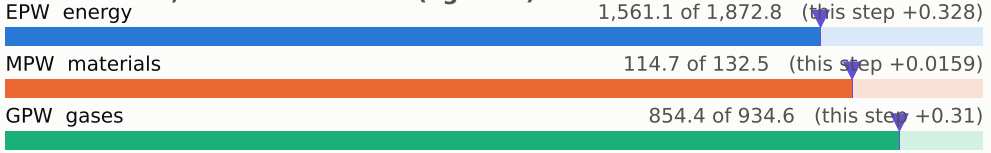

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

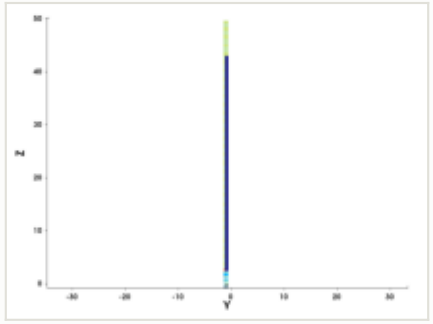

y cut at -1.035 µm

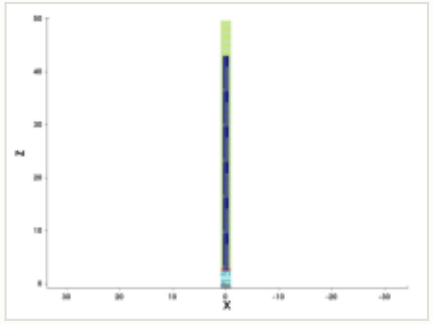

mask for this step

no mask for this step

steps by process area

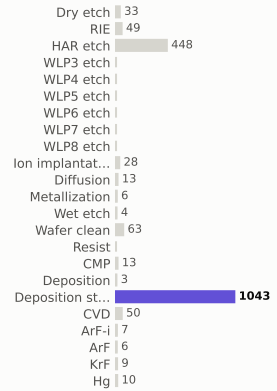

materials deposited (g)

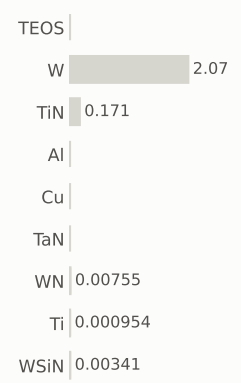

gases emitted (g)

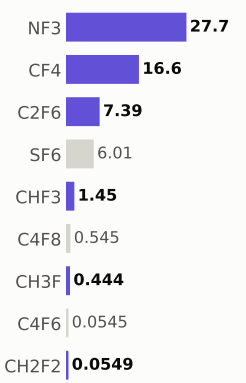

Step #23970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,530.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

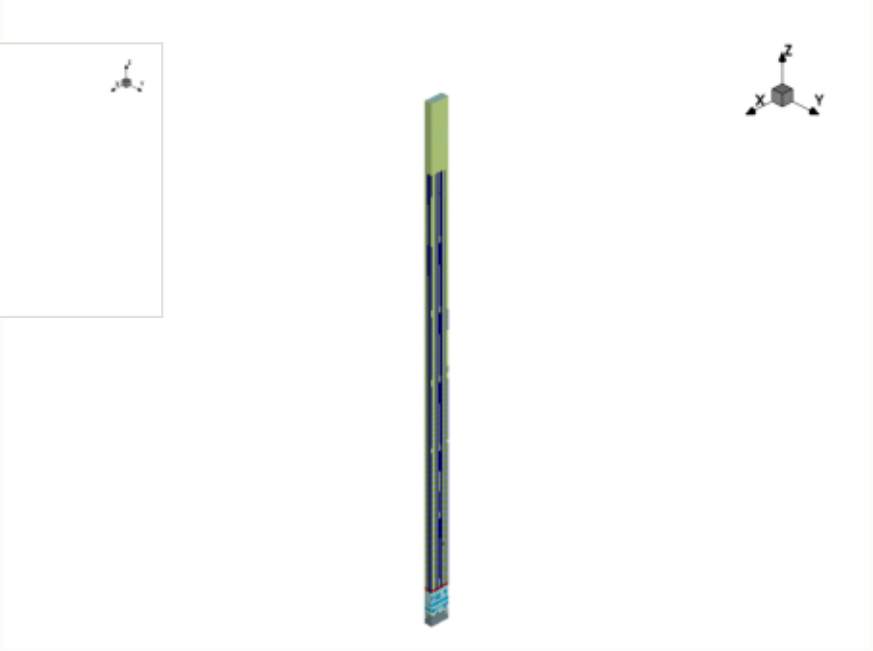

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

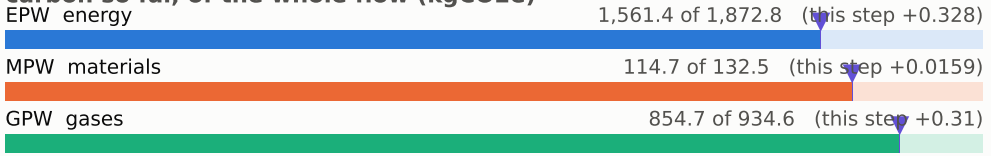

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

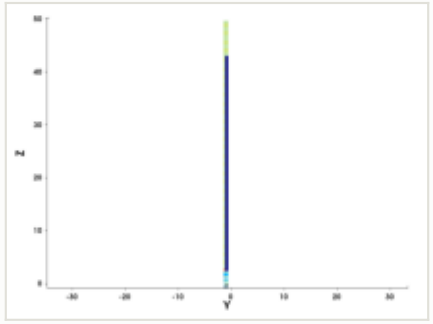

y cut at -1.035 µm

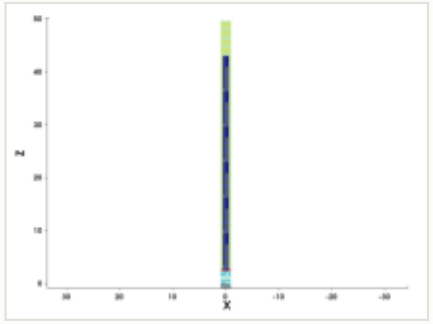

mask for this step

no mask for this step

steps by process area

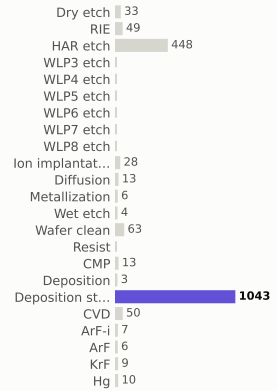

materials deposited (g)

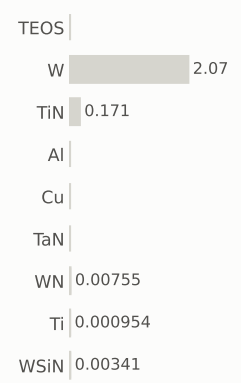

gases emitted (g)

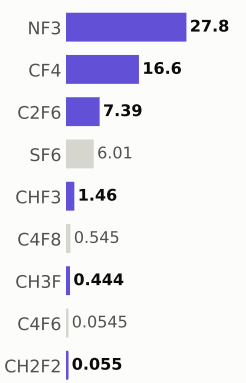

Step #23980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,531.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

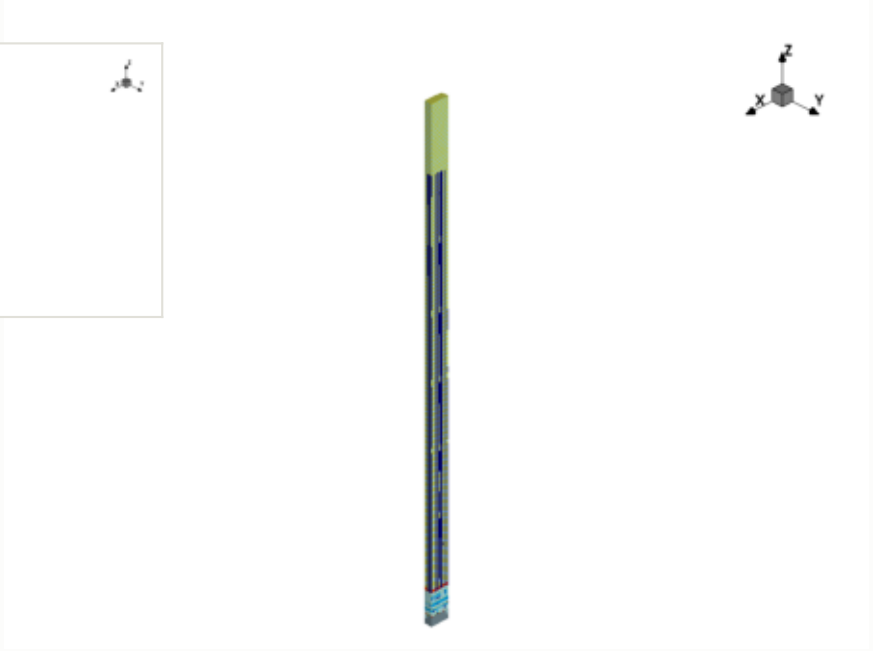

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

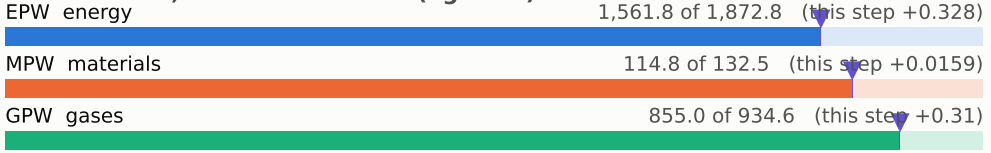

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

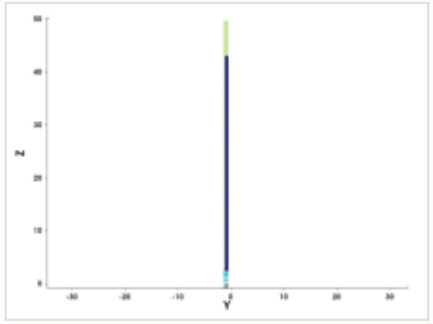

y cut at -1.035 µm

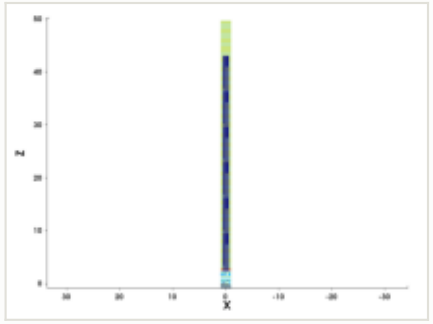

mask for this step

no mask for this step

steps by process area

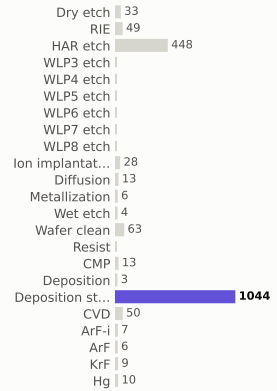

materials deposited (g)

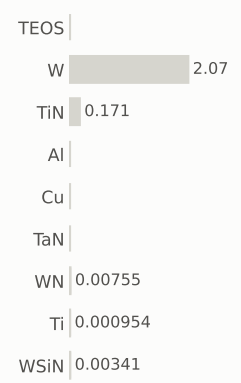

gases emitted (g)

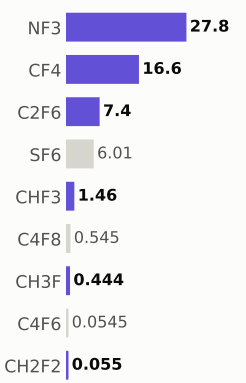

Step #23990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,532.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

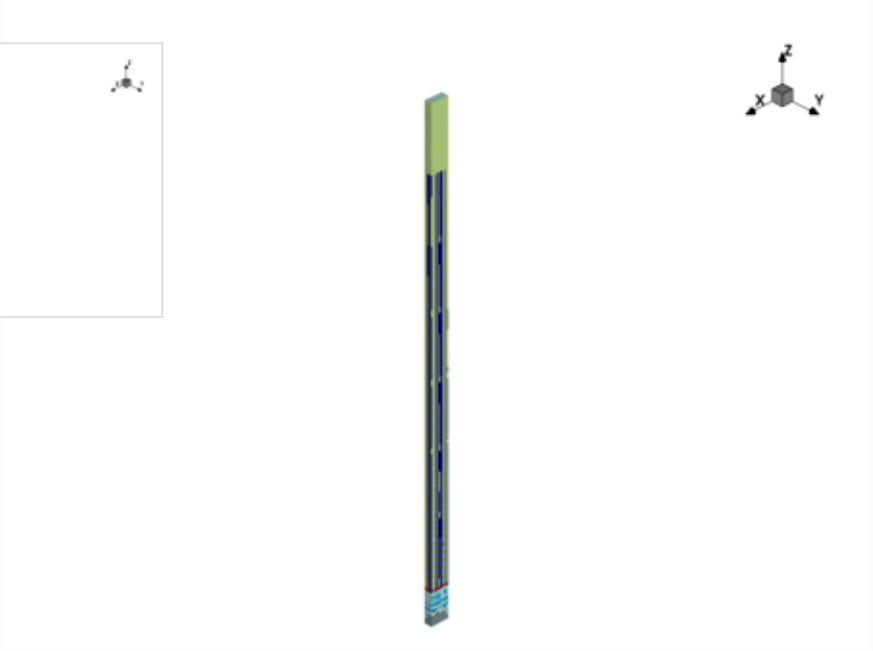

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

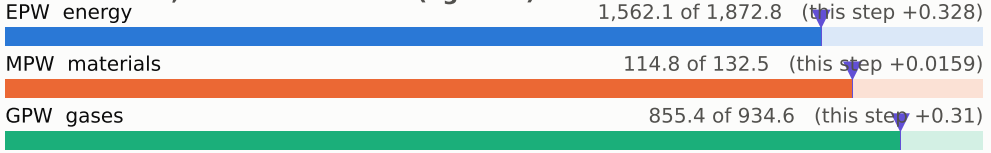

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

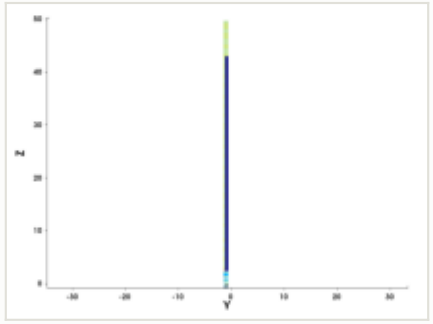

y cut at -1.035 µm

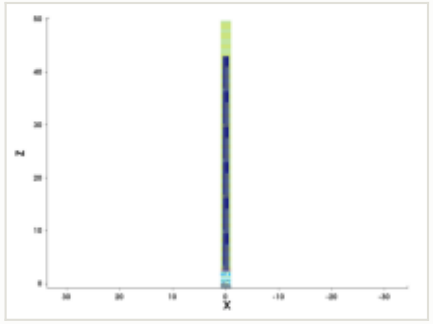

mask for this step

no mask for this step

steps by process area

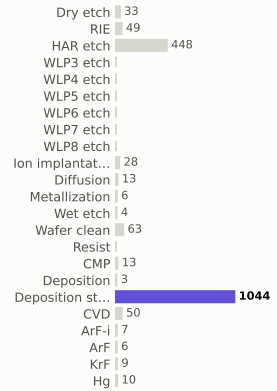

materials deposited (g)

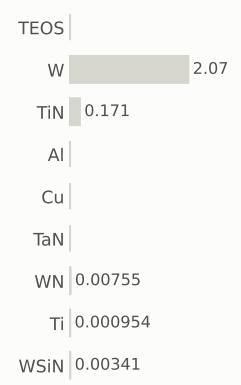

gases emitted (g)

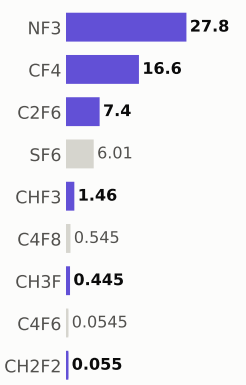

Step #24000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	2,532.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

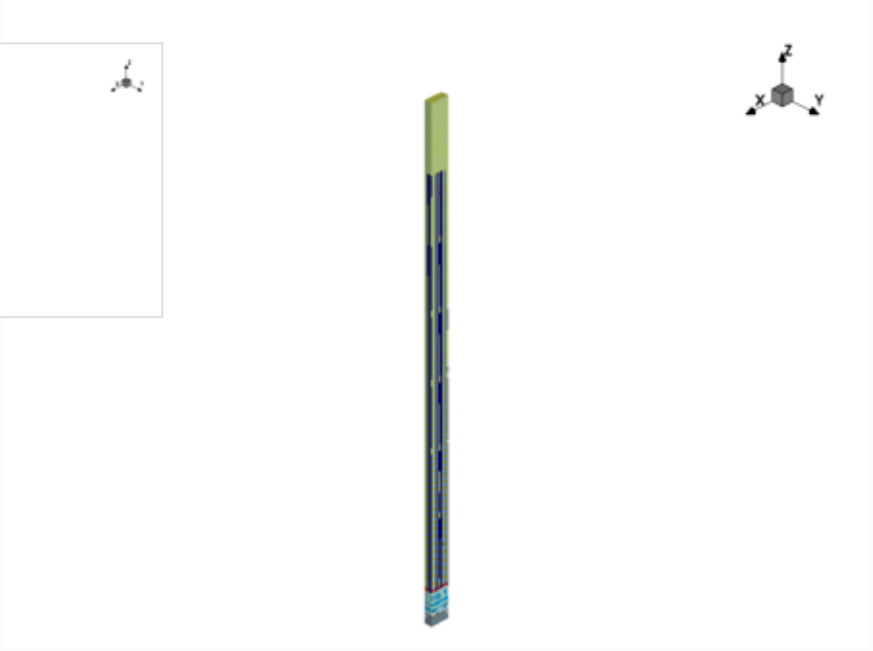

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.025 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

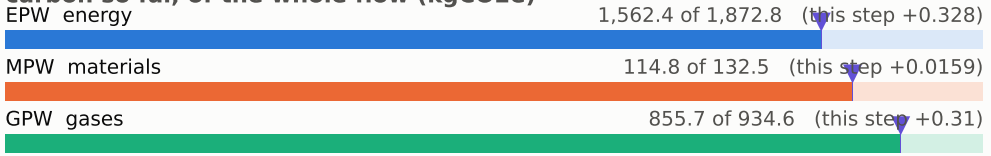

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

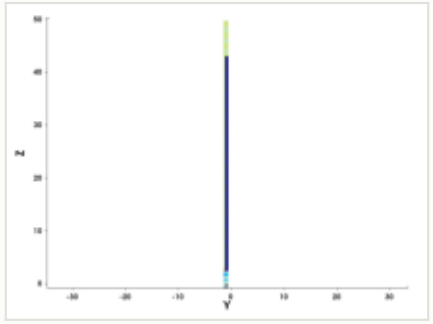

y cut at -1.035 µm

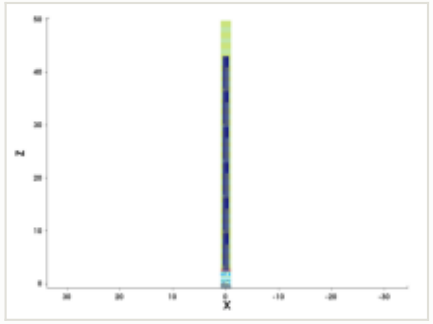

mask for this step

no mask for this step

steps by process area

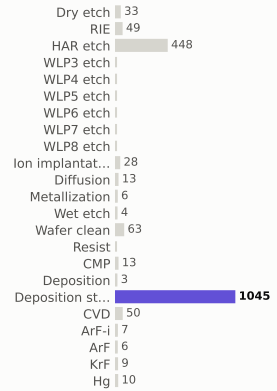

materials deposited (g)

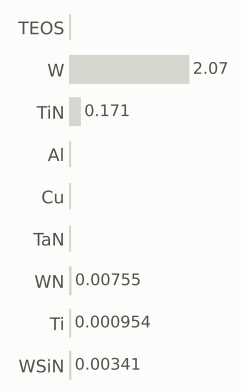

gases emitted (g)

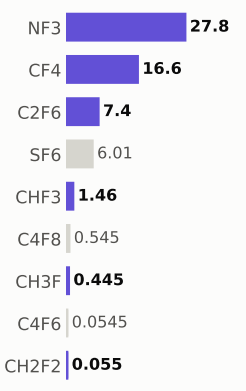

Step #24020: KrF

litho_patterning · KrF

0.199	2,533.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

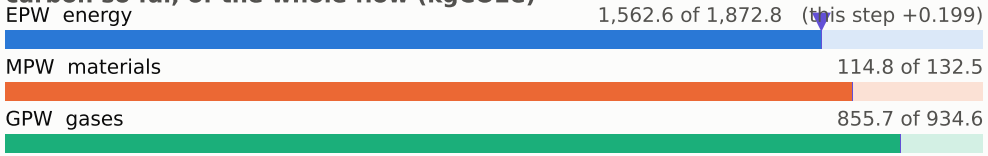

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

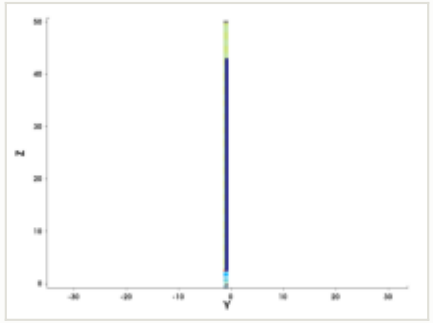

y cut at -1.035 µm

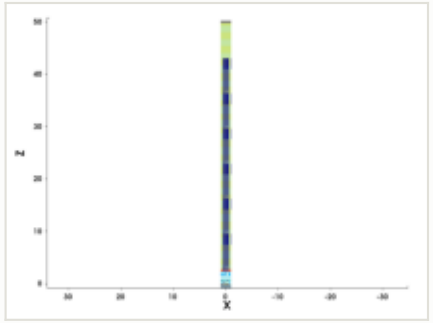

mask: layer 28:0, positive (OASIS)

steps by process area

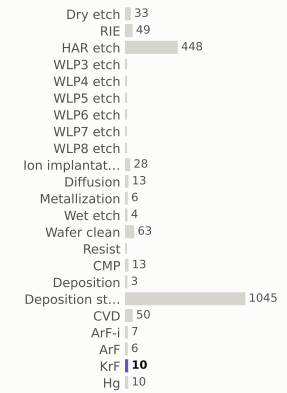

materials deposited (g)

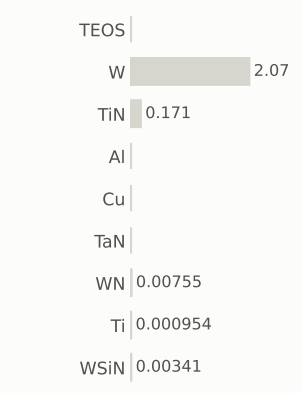

gases emitted (g)

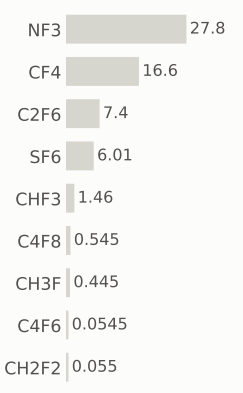

Step #24030: RIE

etch_anisotropic · RIE

1.04	2,534.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

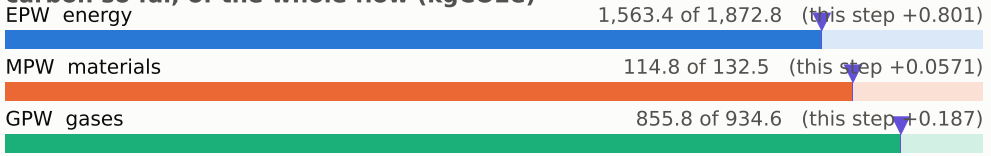

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

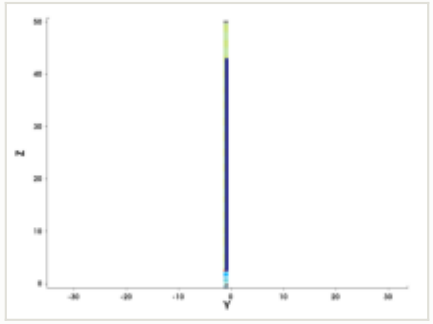

y cut at -1.035 µm

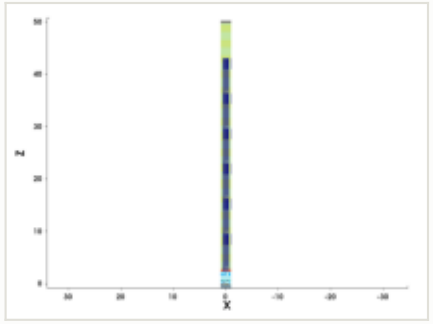

mask for this step

no mask for this step

steps by process area

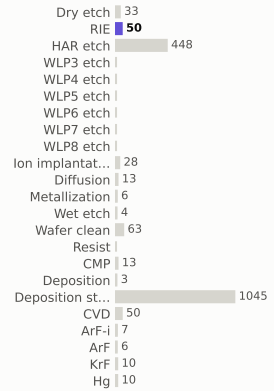

materials deposited (g)

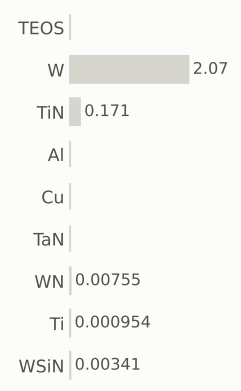

gases emitted (g)

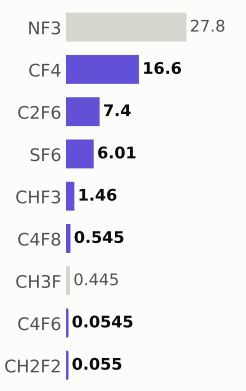

Step #24040: RIE

etch_anisotropic · RIE

1.04	2,535.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

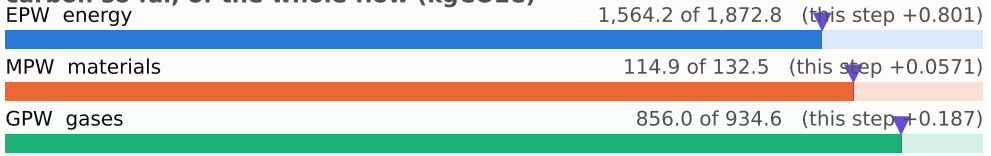

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

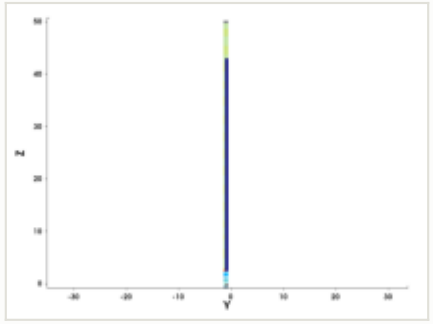

y cut at -1.035 µm

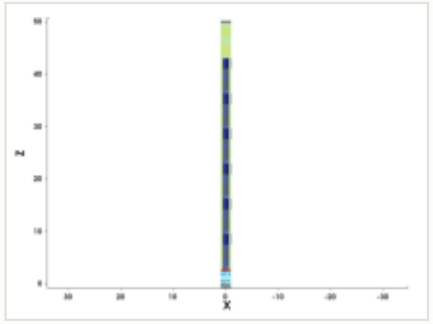

mask for this step

no mask for this step

steps by process area

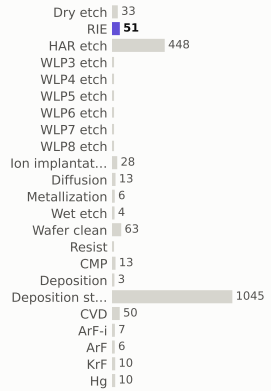

materials deposited (g)

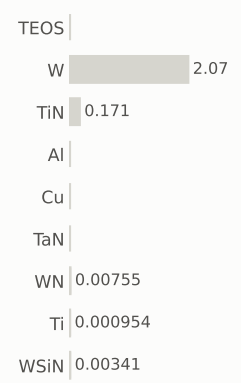

gases emitted (g)

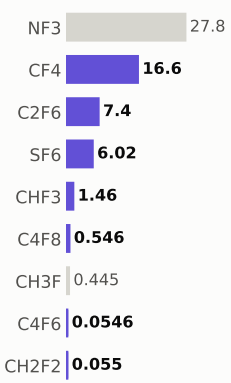

Step #24050: Dry_etch

etch_strip · Dry_etch

0.801	2,536.0	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

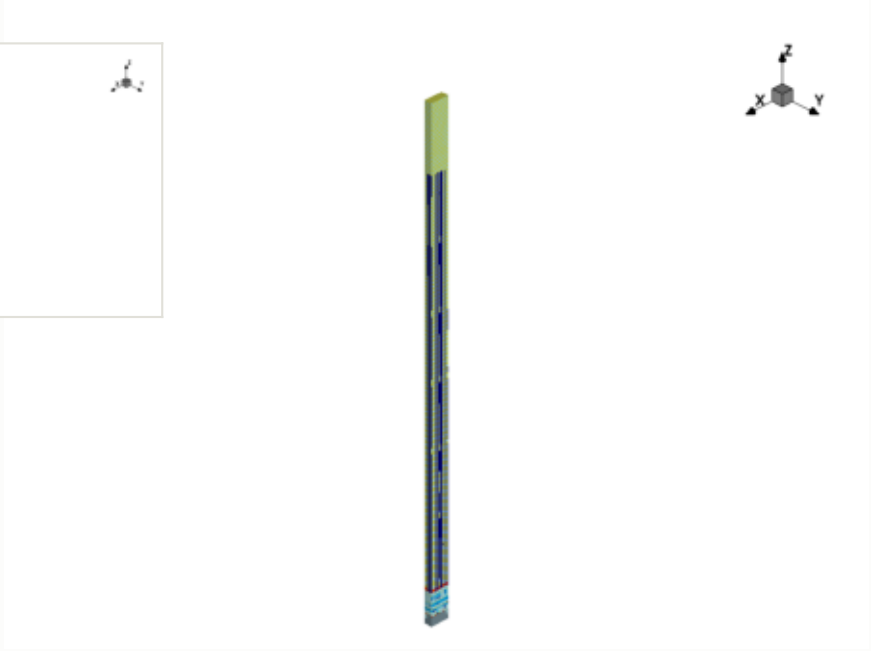

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

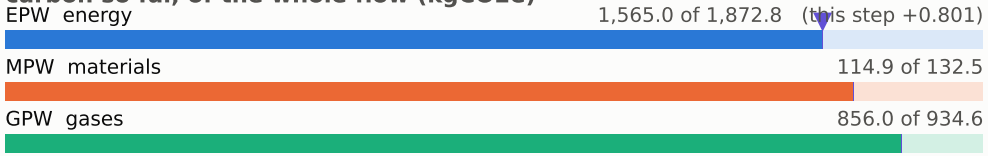

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

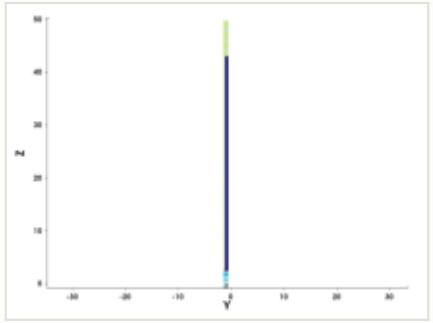

y cut at -1.035 µm

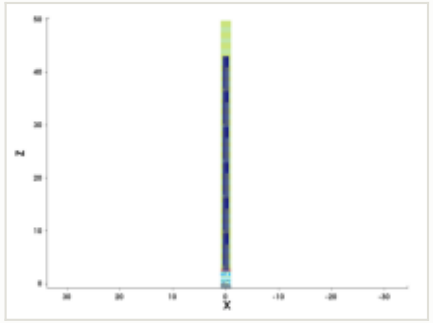

mask for this step

no mask for this step

steps by process area

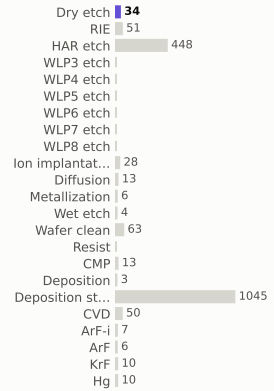

materials deposited (g)

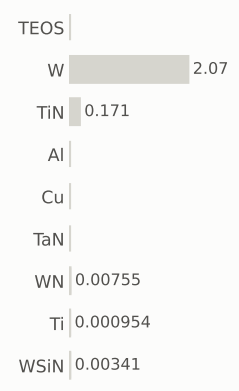

gases emitted (g)

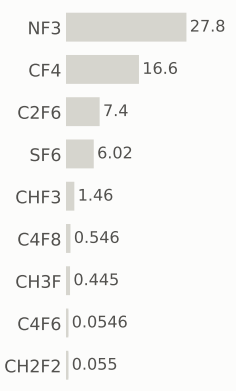

Step #24060: Wafer_clean

clean · Wafer_clean

0.169	2,536.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

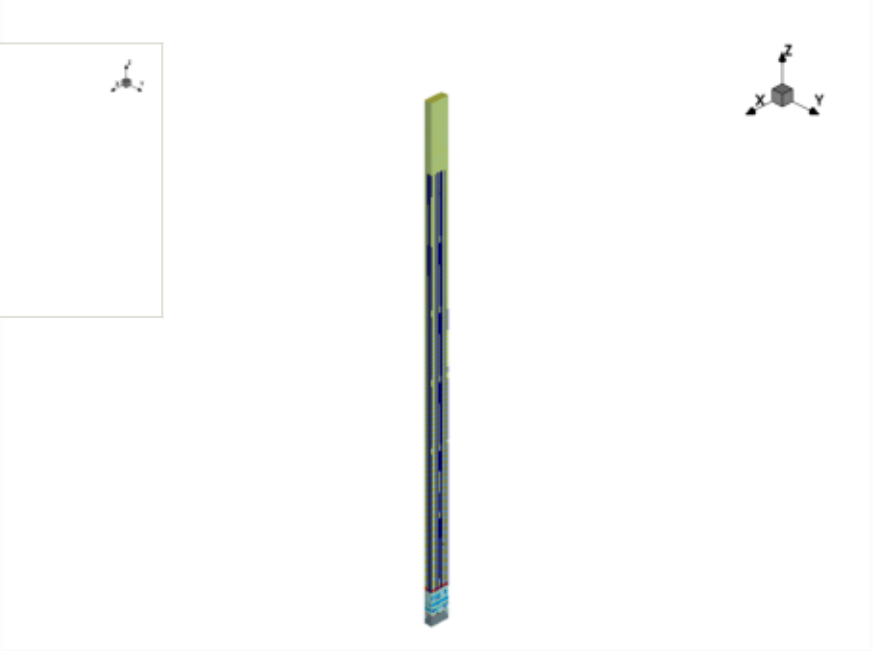

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

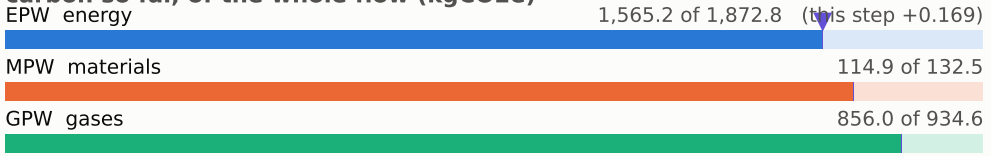

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

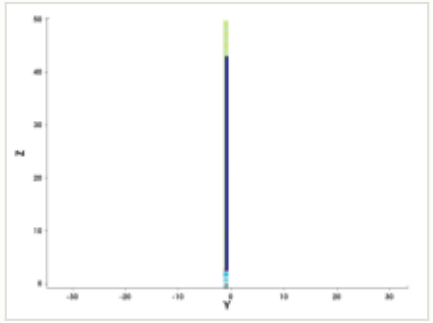

y cut at -1.035 µm

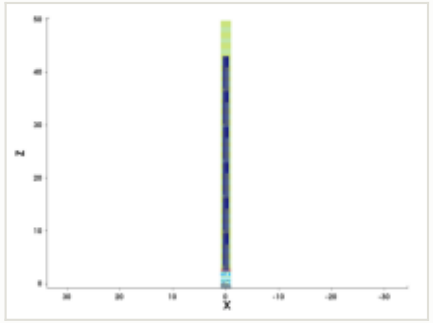

mask for this step

no mask for this step

steps by process area

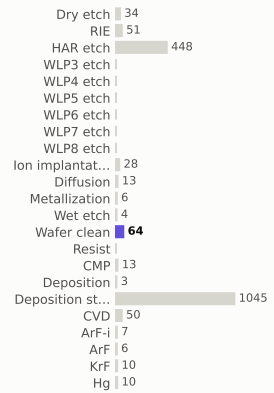

materials deposited (g)

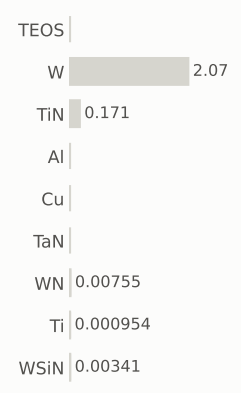

gases emitted (g)

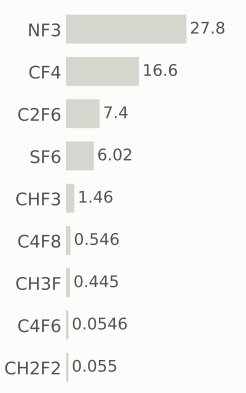

Step #24070: KrF

litho_patterning · KrF

0.199	2,536.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

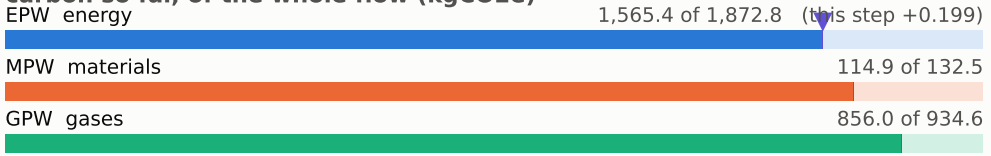

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

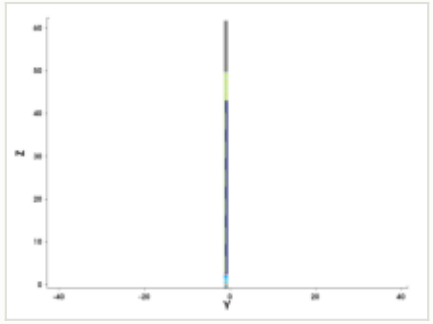

y cut at -1.035 µm

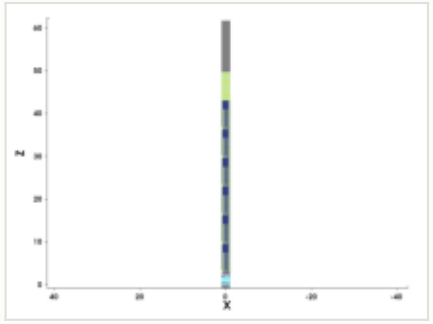

mask: layer 29:0, positive (OASIS)

steps by process area

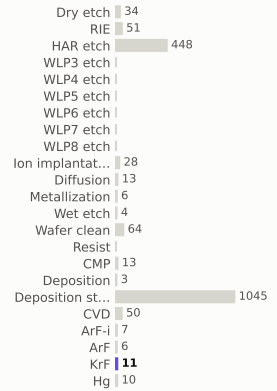

materials deposited (g)

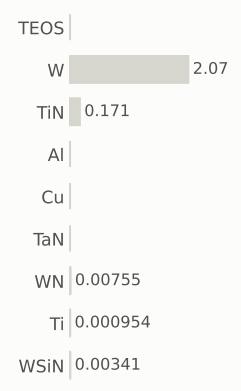

gases emitted (g)

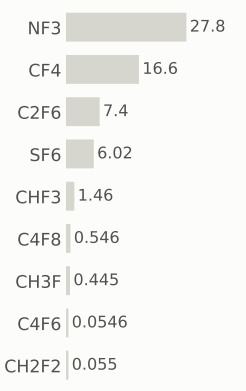

Step #24080: RIE

etch_anisotropic · RIE

1.04	2,537.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

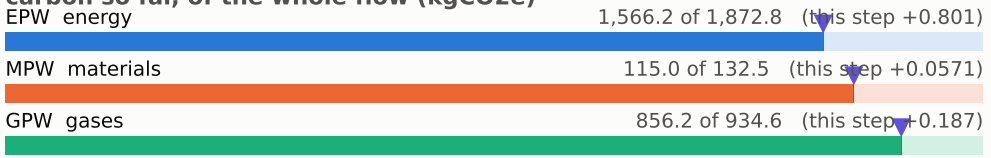

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

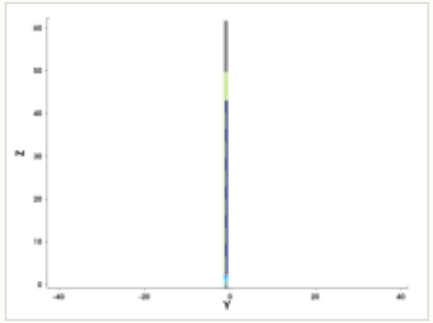

y cut at -1.035 µm

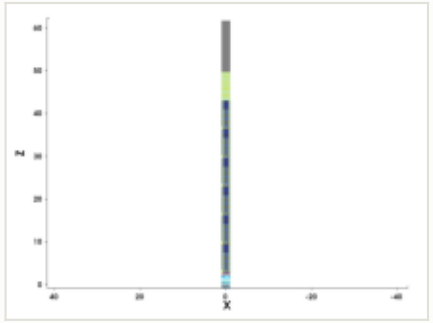

mask for this step

no mask for this step

steps by process area

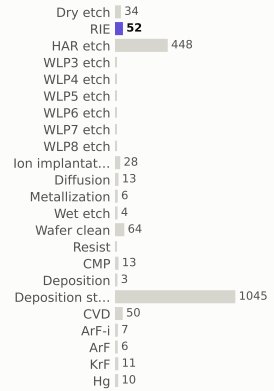

materials deposited (g)

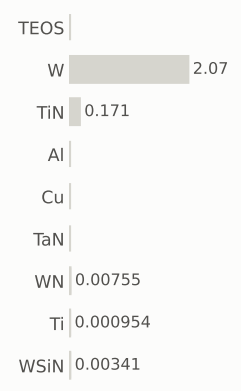

gases emitted (g)

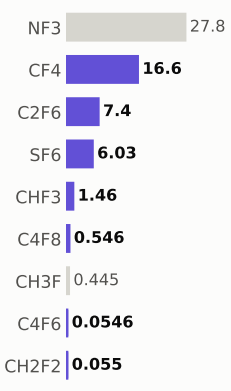

Step #24090: RIE

etch_anisotropic · RIE

1.04	2,538.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

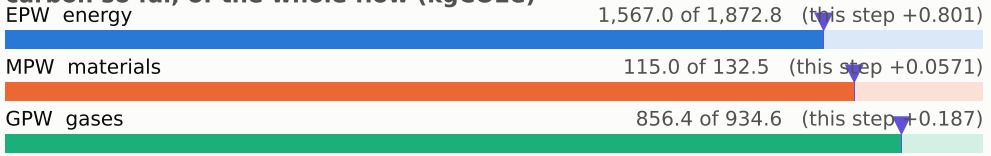

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

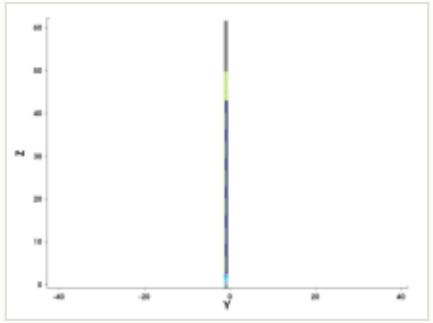

y cut at -1.035 µm

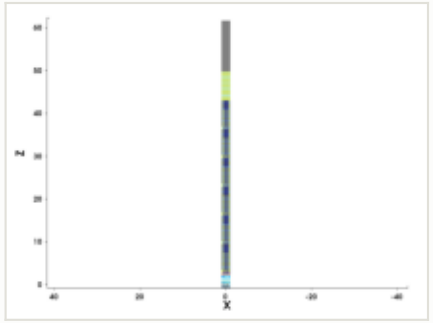

mask for this step

no mask for this step

steps by process area

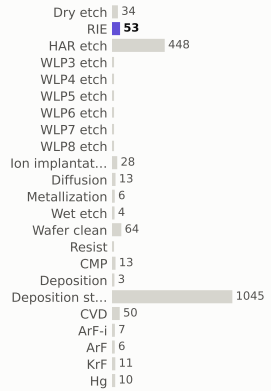

materials deposited (g)

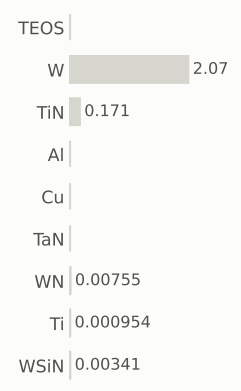

gases emitted (g)

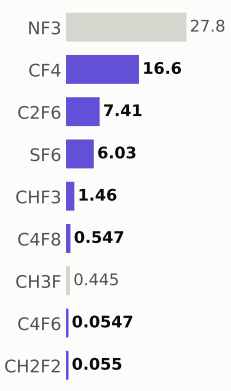

Step #24100: RIE

etch_anisotropic · RIE

1.04	2,539.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

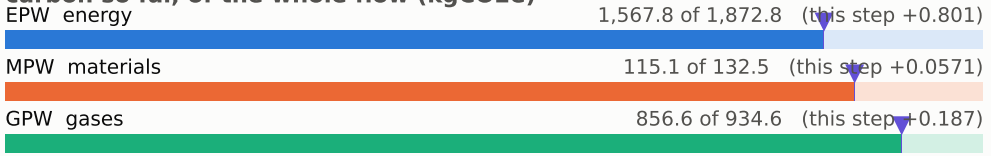

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

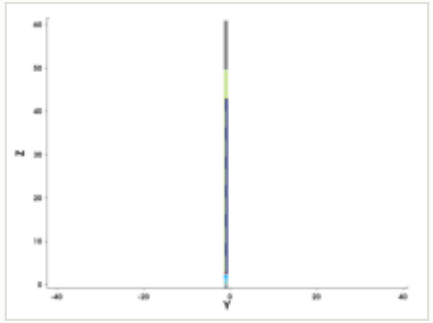

y cut at -1.035 µm

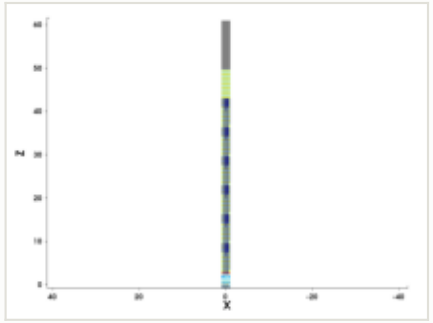

mask for this step

no mask for this step

steps by process area

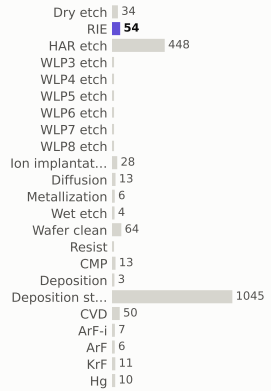

materials deposited (g)

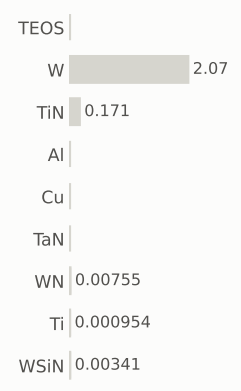

gases emitted (g)

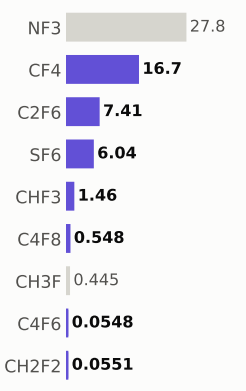

Step #24110: RIE

etch_anisotropic · RIE

1.04	2,540.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

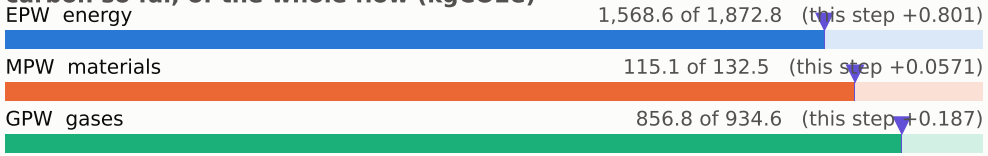

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

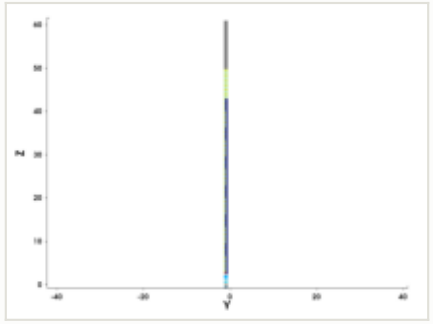

y cut at -1.035 µm

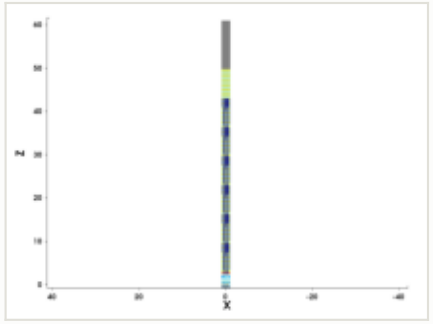

mask for this step

no mask for this step

steps by process area

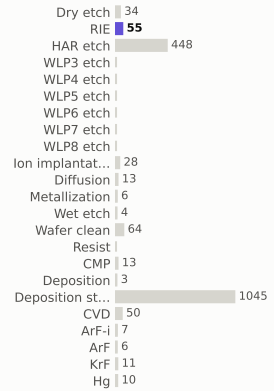

materials deposited (g)

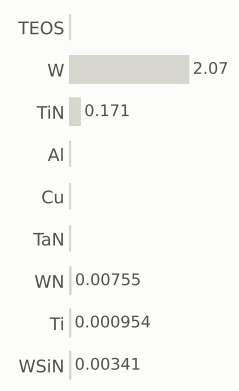

gases emitted (g)

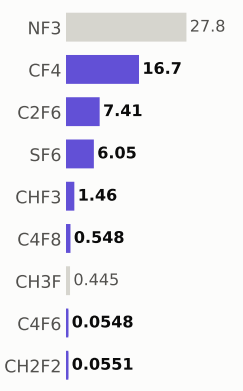

Step #24120: RIE

etch_anisotropic · RIE

1.04	2,541.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

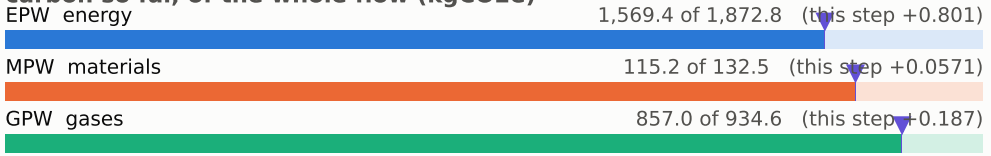

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

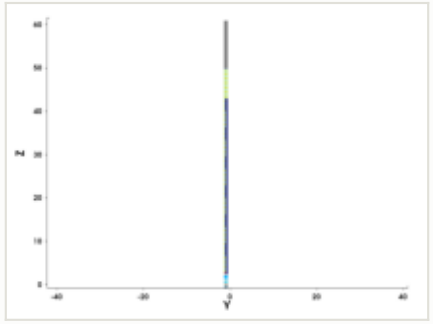

y cut at -1.035 µm

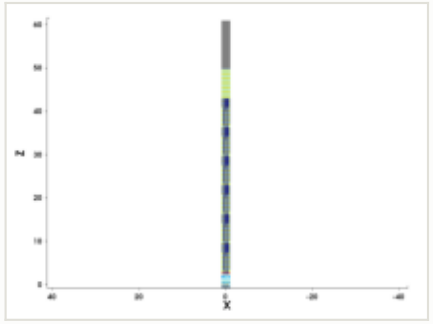

mask for this step

no mask for this step

steps by process area

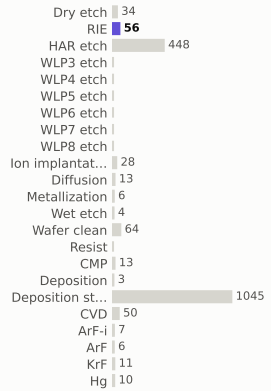

materials deposited (g)

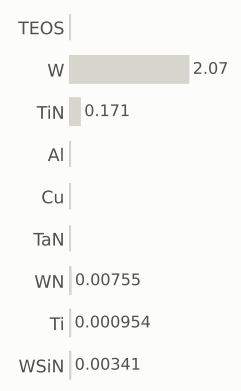

gases emitted (g)

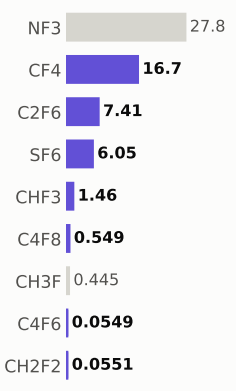

Step #24130: RIE

etch_anisotropic · RIE

1.04	2,542.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

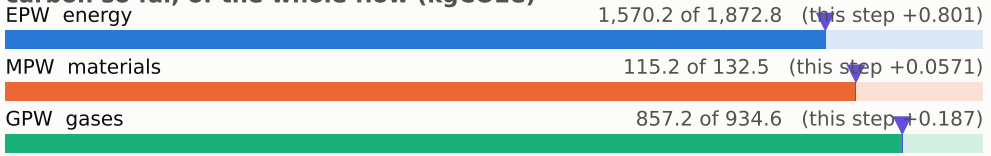

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

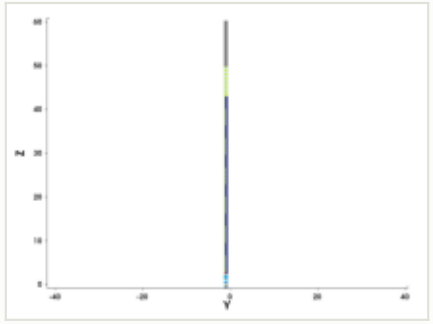

y cut at -1.035 µm

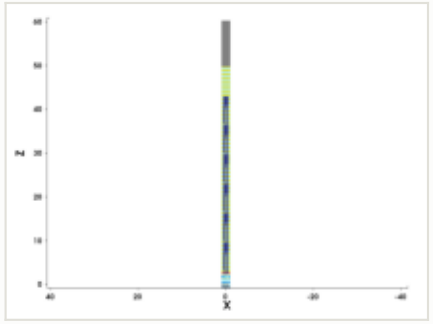

mask for this step

no mask for this step

steps by process area

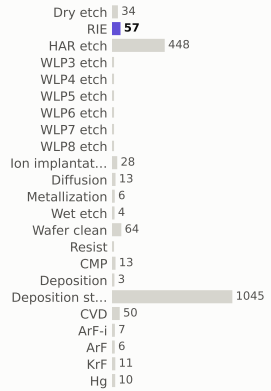

materials deposited (g)

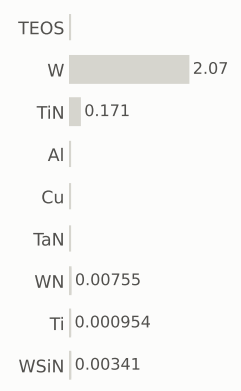

gases emitted (g)

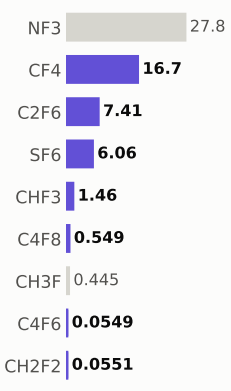

Step #24140: RIE

etch_anisotropic · RIE

1.04	2,543.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

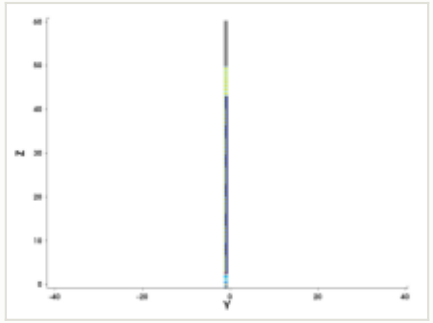

y cut at -1.035 µm

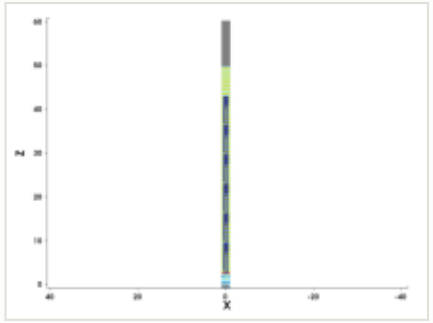

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

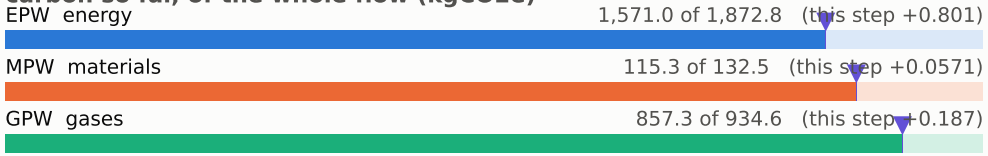

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

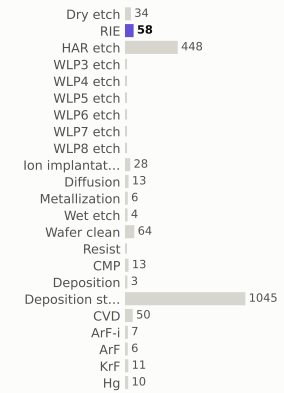

materials deposited (g)

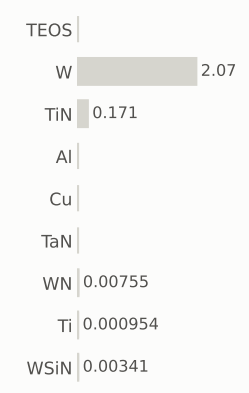

gases emitted (g)

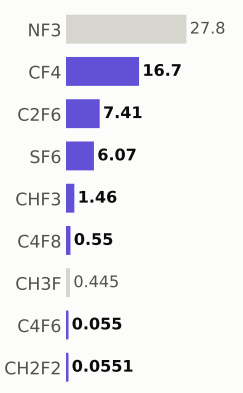

Step #24150: RIE

etch_anisotropic · RIE

1.04	2,544.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

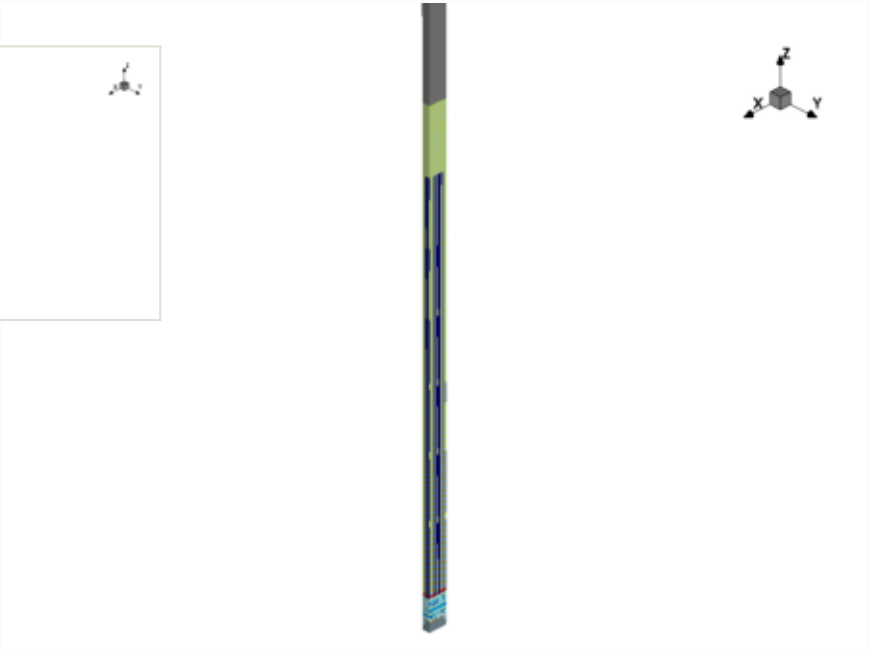

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

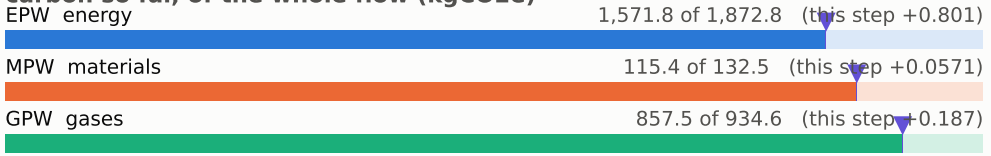

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

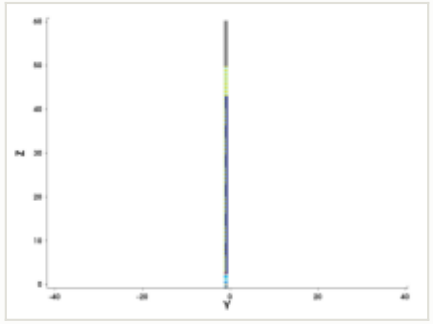

y cut at -1.035 µm

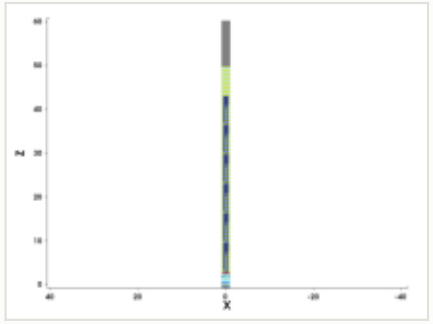

mask for this step

no mask for this step

steps by process area

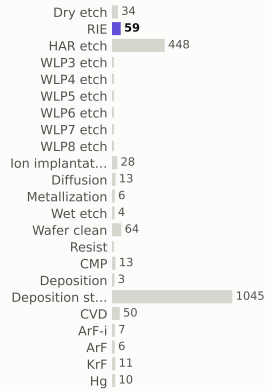

materials deposited (g)

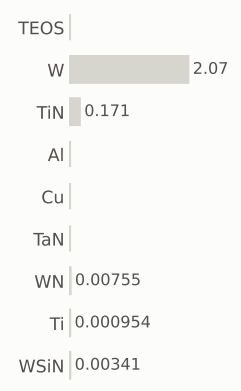

gases emitted (g)

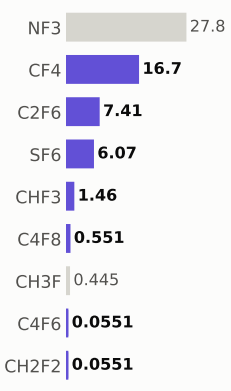

Step #24160: RIE

etch_anisotropic · RIE

1.04	2,545.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

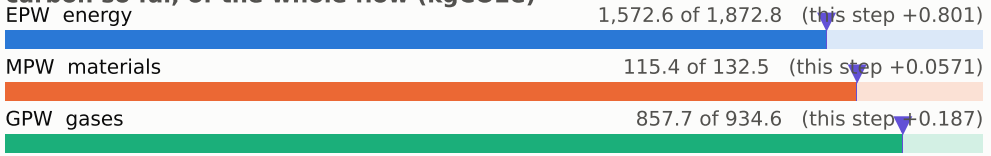

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

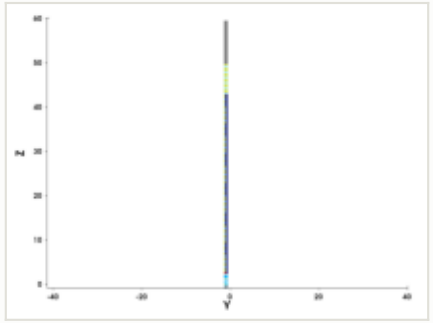

y cut at -1.035 µm

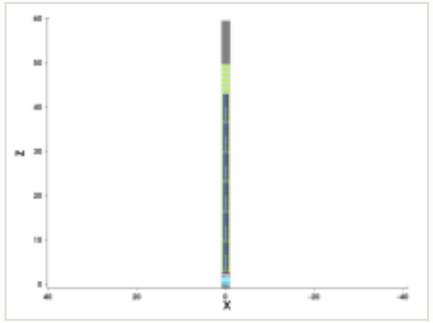

mask for this step

no mask for this step

steps by process area

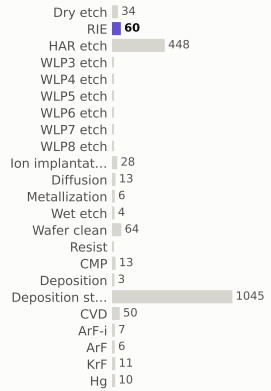

materials deposited (g)

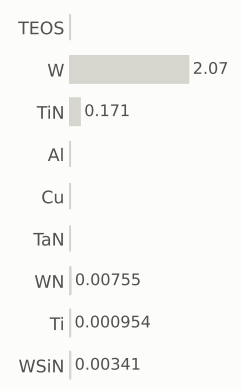

gases emitted (g)

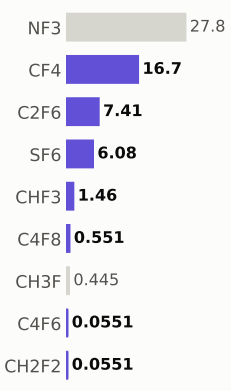

Step #24170: RIE

etch_anisotropic · RIE

1.04	2,546.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

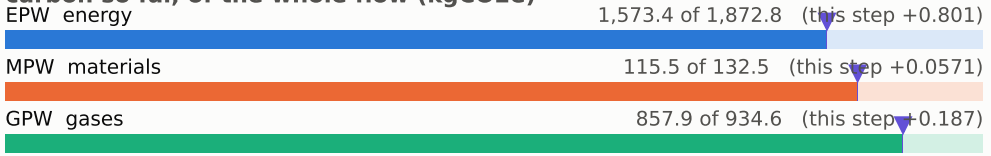

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

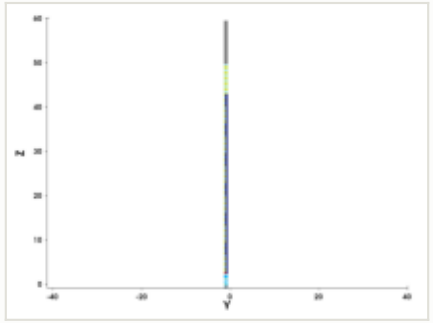

y cut at -1.035 µm

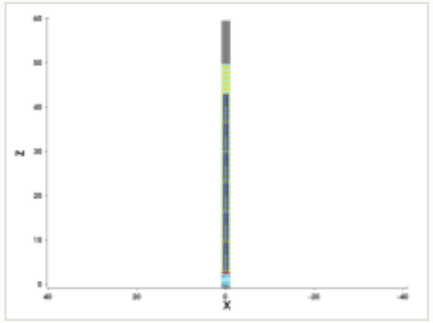

mask for this step

no mask for this step

steps by process area

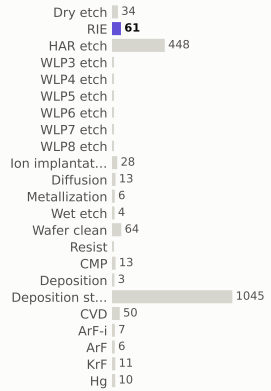

materials deposited (g)

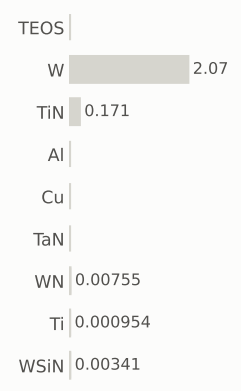

gases emitted (g)

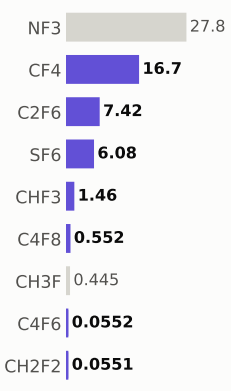

Step #24180: RIE

etch_anisotropic · RIE

1.04	2,547.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

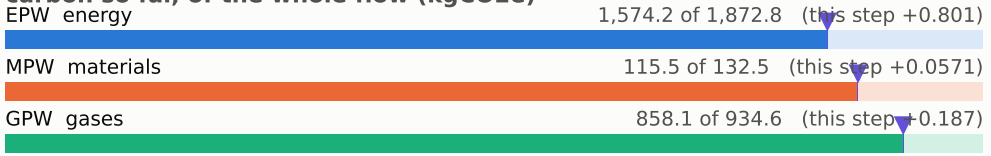

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

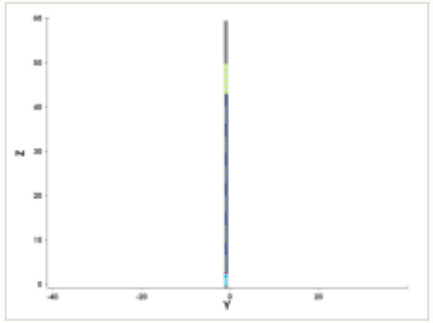

y cut at -1.035 µm

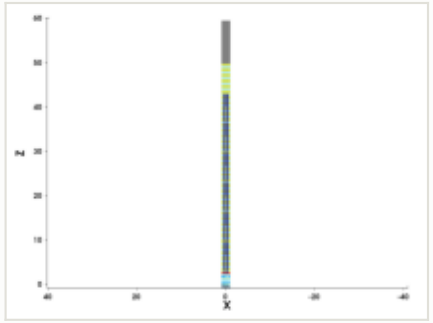

mask for this step

no mask for this step

steps by process area

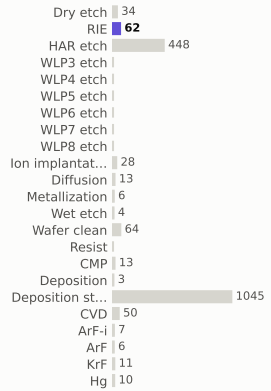

materials deposited (g)

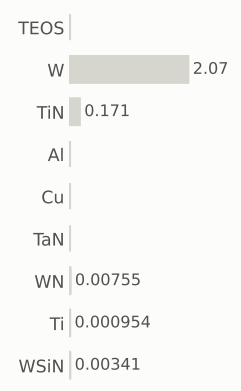

gases emitted (g)

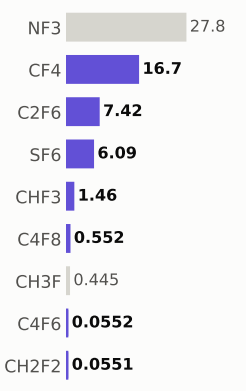

Step #24190: RIE

etch_anisotropic · RIE

1.04	2,548.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

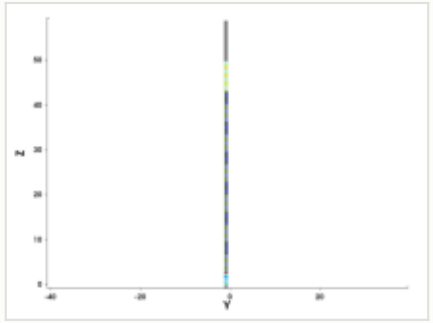

y cut at -1.035 µm

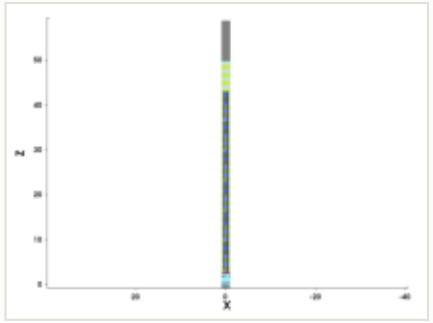

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

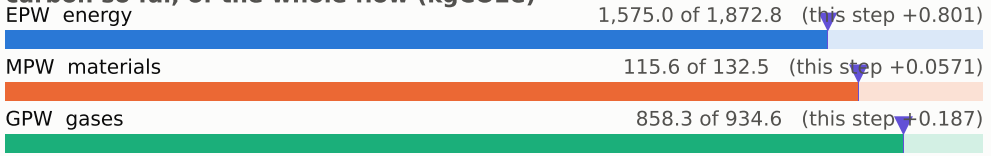

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

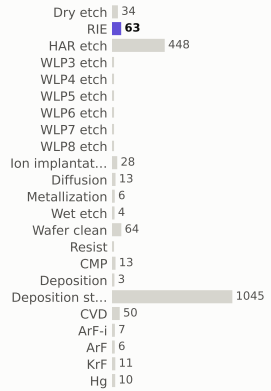

materials deposited (g)

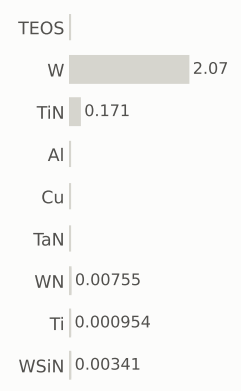

gases emitted (g)

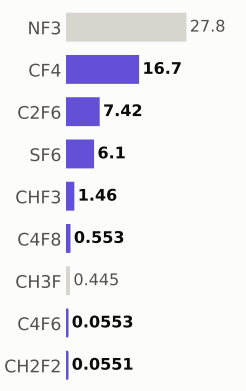

Step #24200: RIE

etch_anisotropic · RIE

1.04	2,549.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

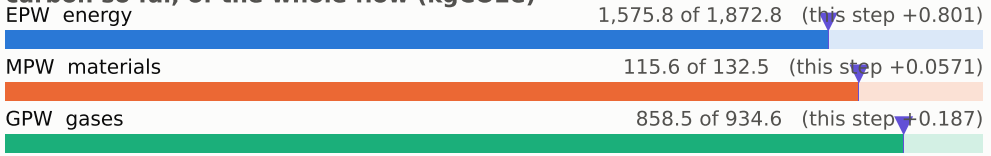

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

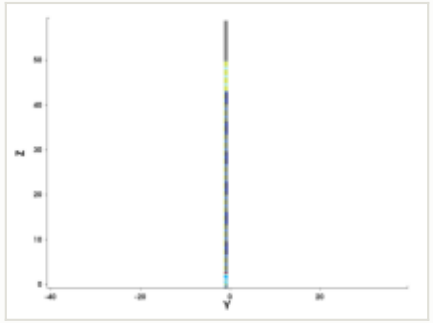

y cut at -1.035 µm

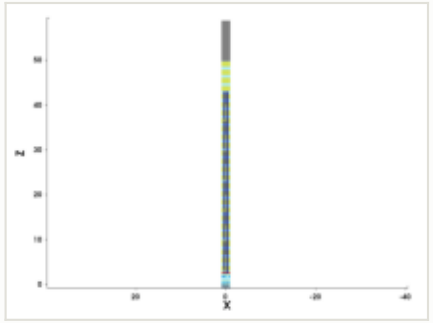

mask for this step

no mask for this step

steps by process area

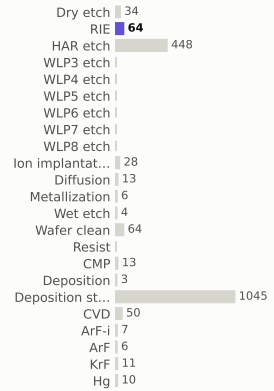

materials deposited (g)

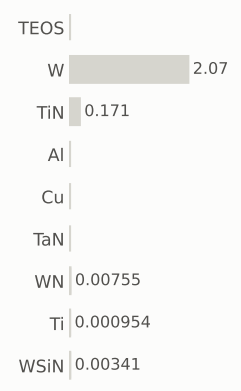

gases emitted (g)

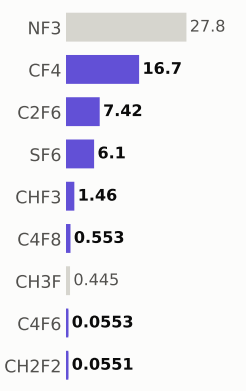

Step #24210: RIE

etch_anisotropic · RIE

1.04	2,551.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

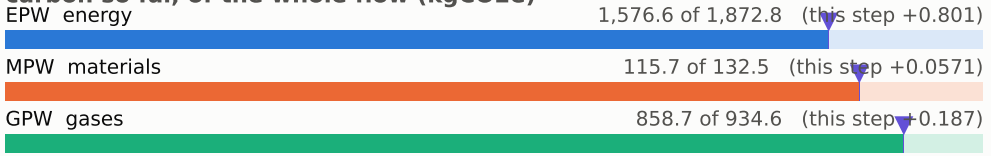

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

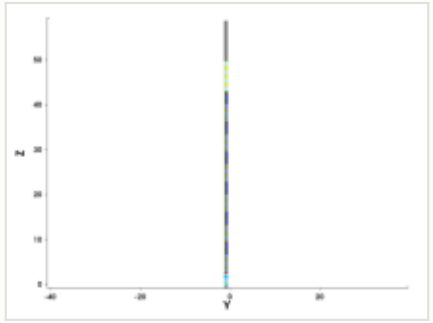

y cut at -1.035 µm

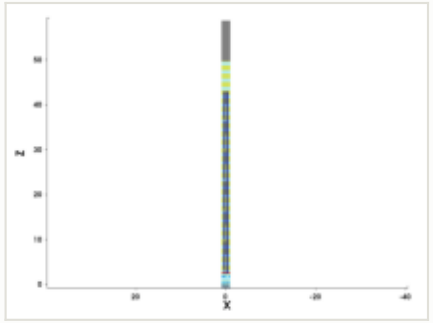

mask for this step

no mask for this step

steps by process area

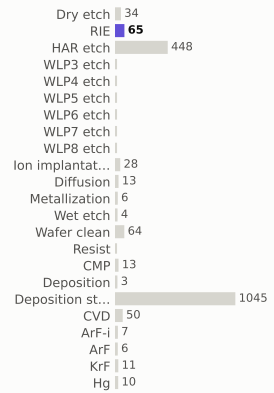

materials deposited (g)

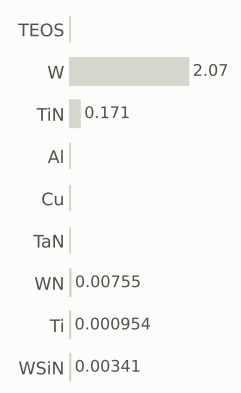

gases emitted (g)

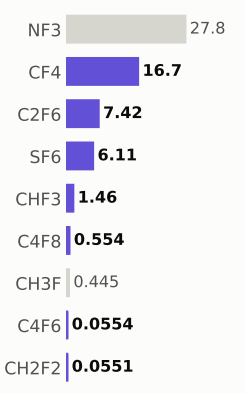

Step #24220: RIE

etch_anisotropic · RIE

1.04	2,552.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

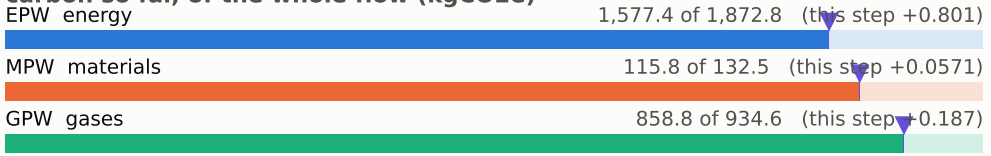

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

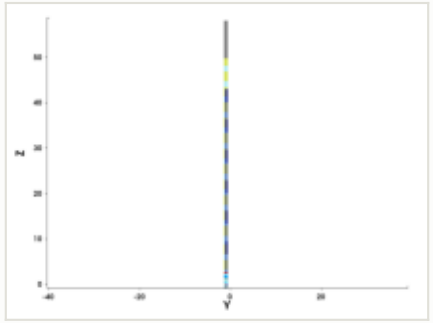

y cut at -1.035 µm

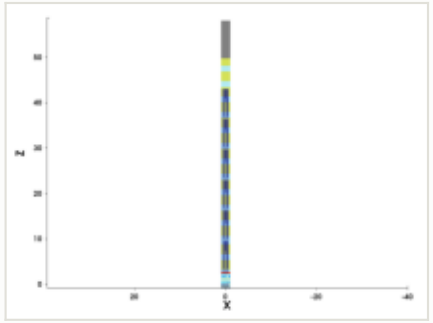

mask for this step

no mask for this step

steps by process area

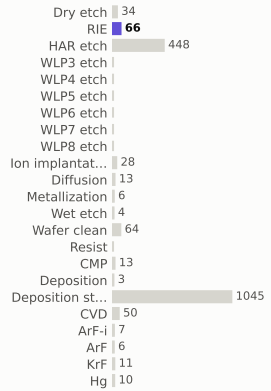

materials deposited (g)

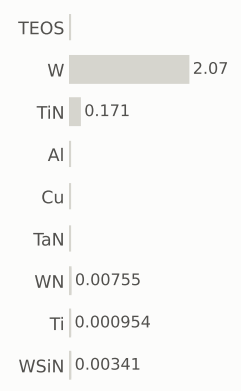

gases emitted (g)

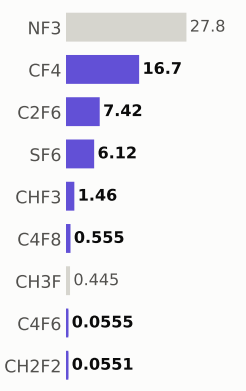

Step #24230: RIE

etch_anisotropic · RIE

1.04	2,553.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

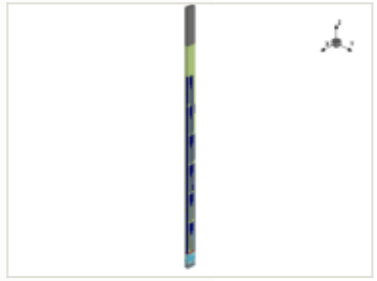

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

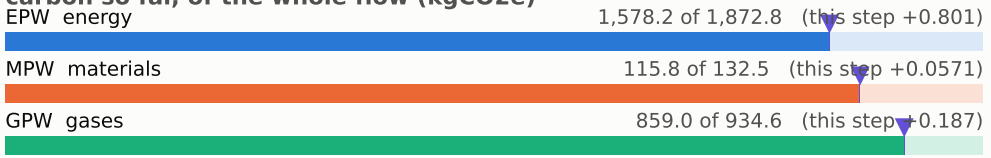

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

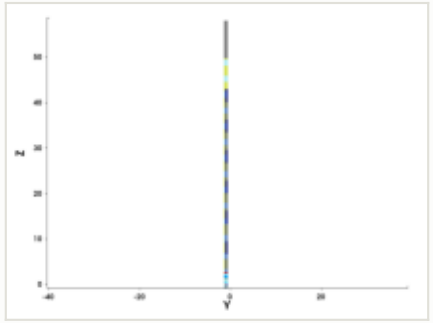

y cut at -1.035 µm

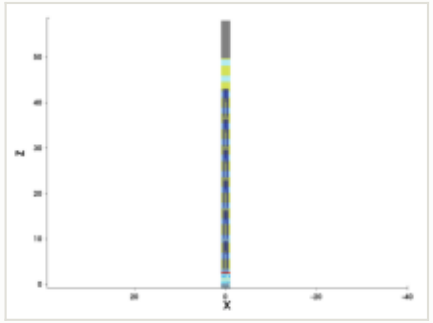

mask for this step

no mask for this step

steps by process area

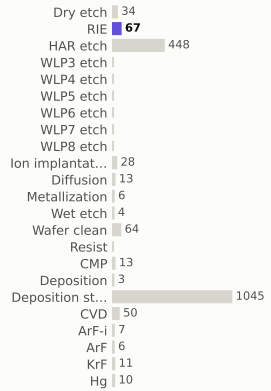

materials deposited (g)

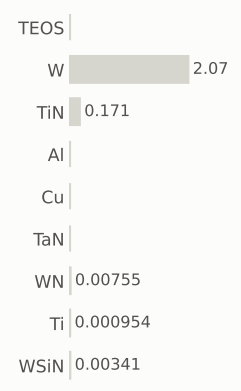

gases emitted (g)

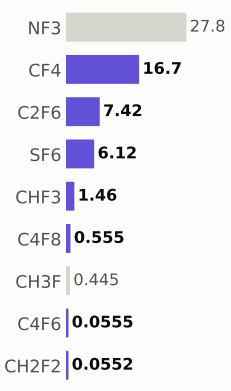

Step #24240: RIE

etch_anisotropic · RIE

1.04	2,554.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

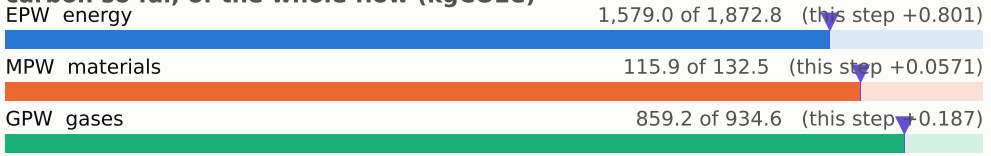

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

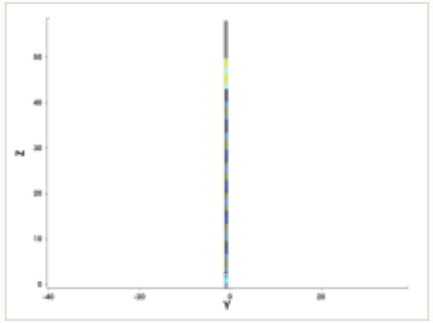

y cut at -1.035 µm

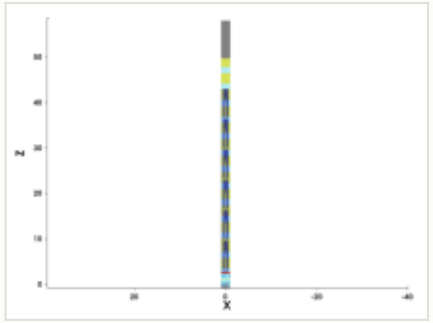

mask for this step

no mask for this step

steps by process area

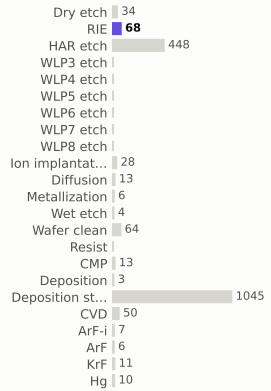

materials deposited (g)

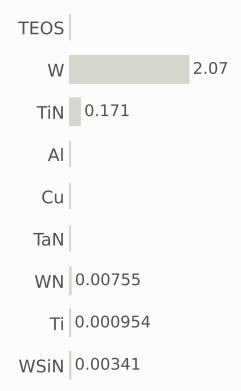

gases emitted (g)

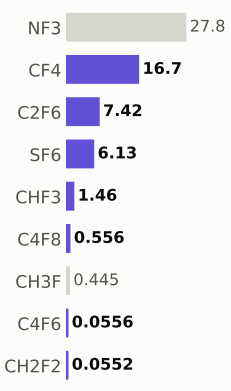

Step #24250: RIE

etch_anisotropic · RIE

1.04	2,555.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

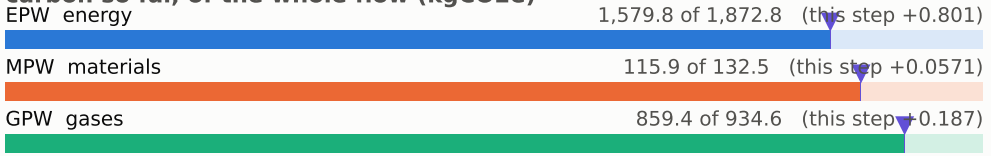

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

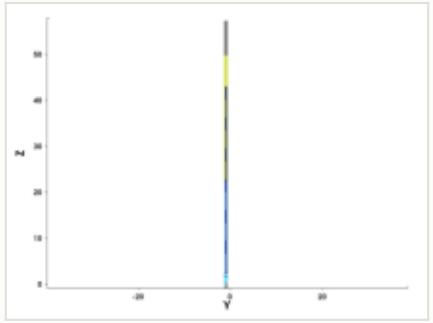

y cut at -1.035 µm

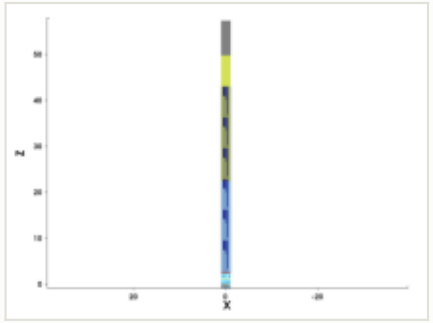

mask for this step

no mask for this step

steps by process area

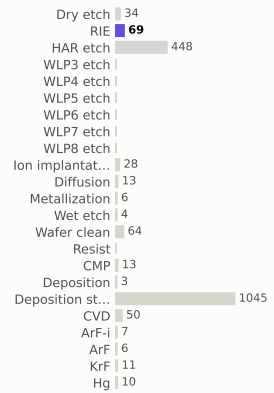

materials deposited (g)

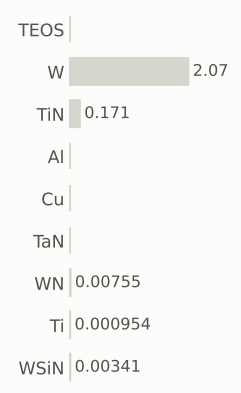

gases emitted (g)

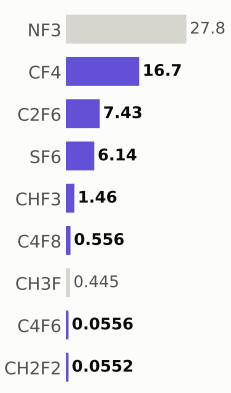

Step #24260: RIE

etch_anisotropic · RIE

1.04	2,556.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

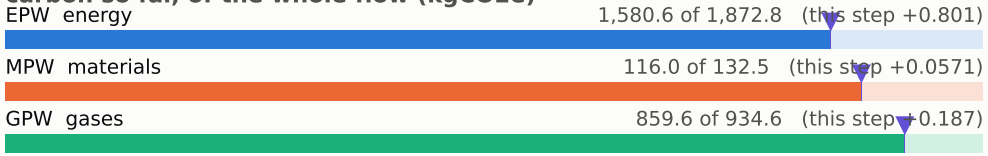

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

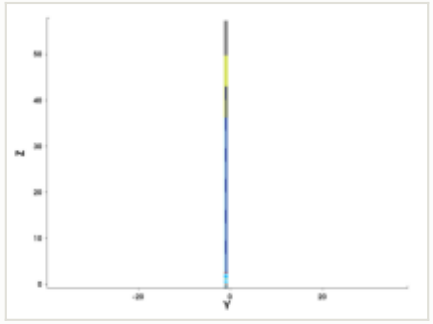

y cut at -1.035 µm

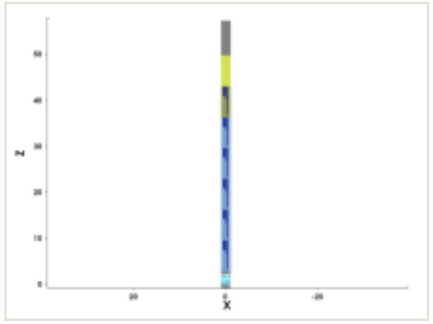

mask for this step

no mask for this step

steps by process area

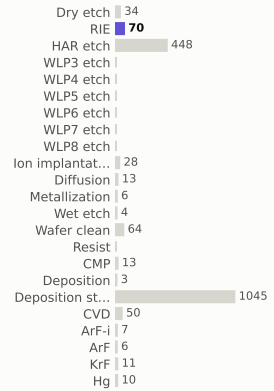

materials deposited (g)

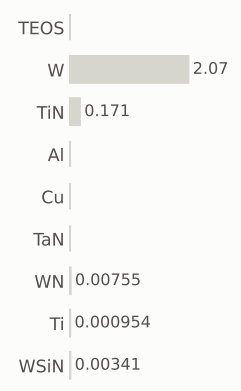

gases emitted (g)

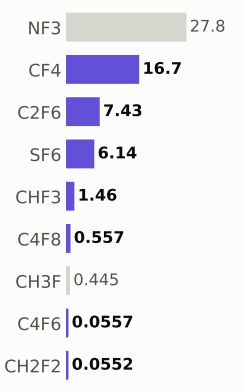

Step #24270: RIE

etch_anisotropic · RIE

1.04	2,557.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

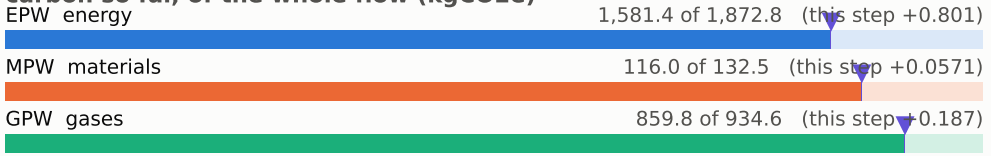

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

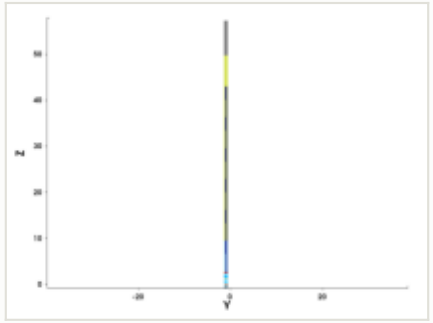

y cut at -1.035 µm

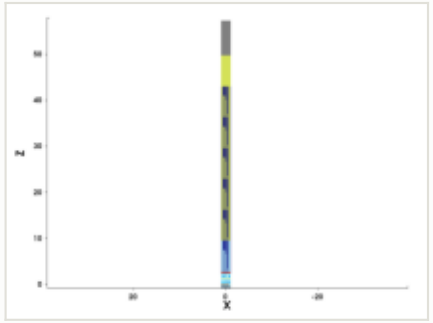

mask for this step

no mask for this step

steps by process area

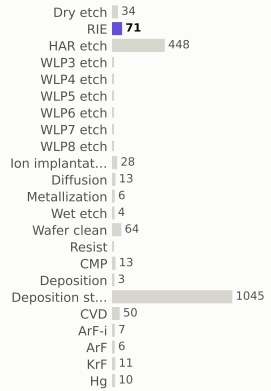

materials deposited (g)

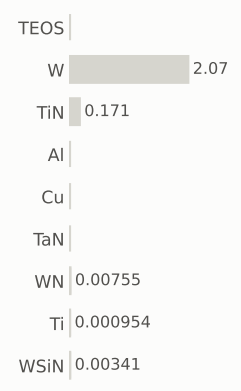

gases emitted (g)

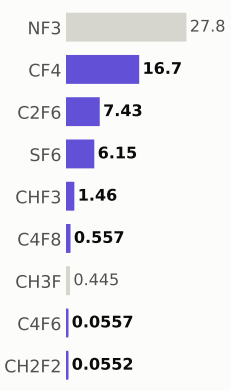

Step #24280: RIE

etch_anisotropic · RIE

1.04	2,558.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

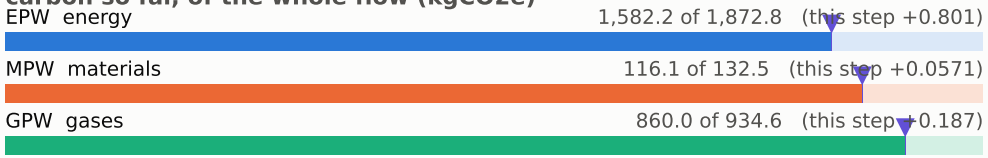

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

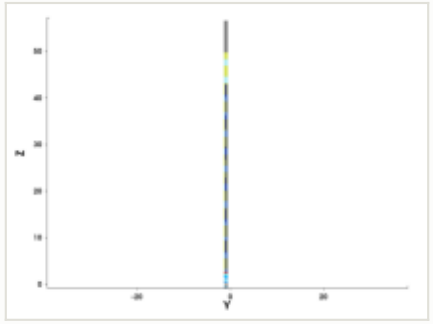

y cut at -1.035 µm

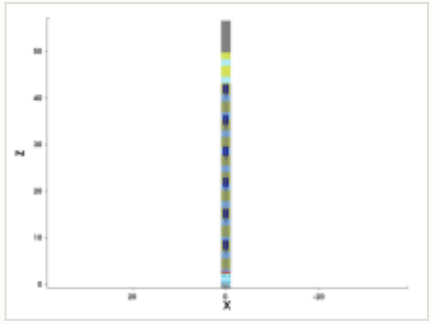

mask for this step

no mask for this step

steps by process area

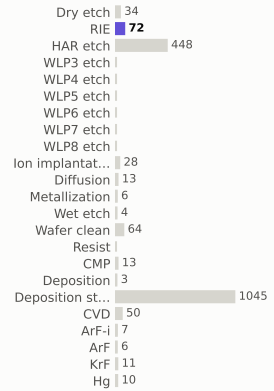

materials deposited (g)

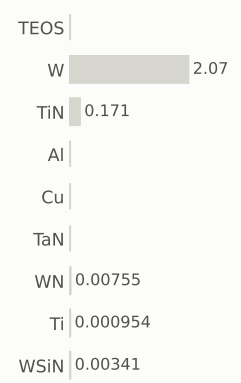

gases emitted (g)

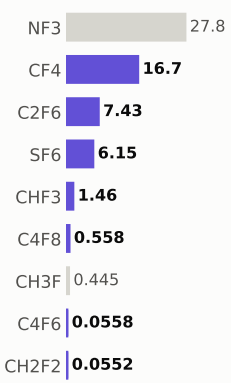

Step #24290: RIE

etch_anisotropic · RIE

1.04	2,559.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

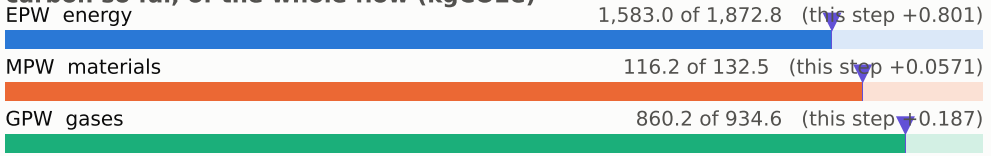

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

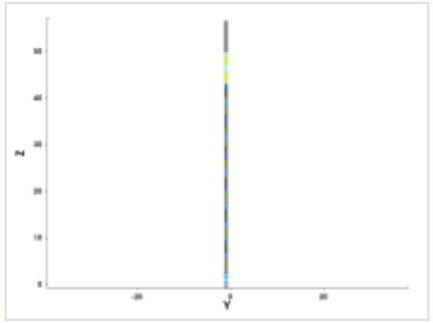

y cut at -1.035 µm

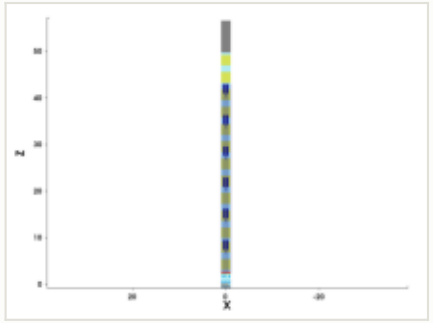

mask for this step

no mask for this step

steps by process area

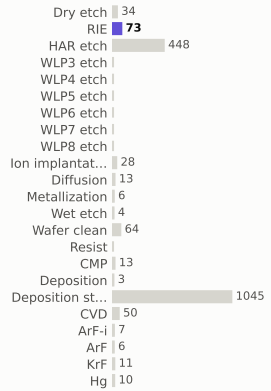

materials deposited (g)

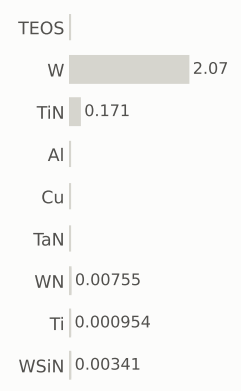

gases emitted (g)

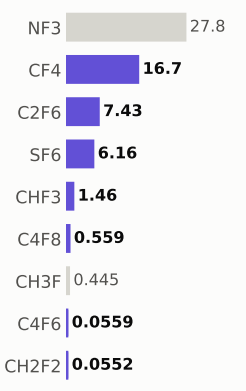

Step #24300: RIE

etch_anisotropic · RIE

1.04	2,560.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

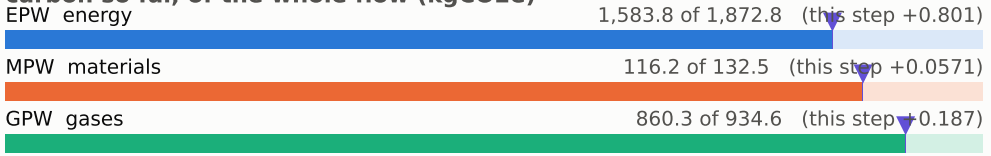

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

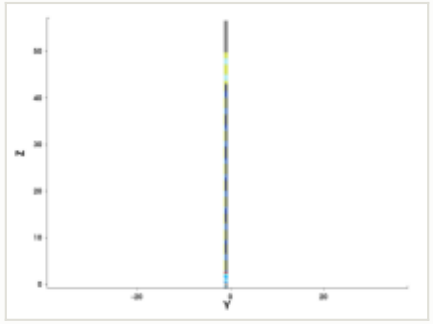

y cut at -1.035 µm

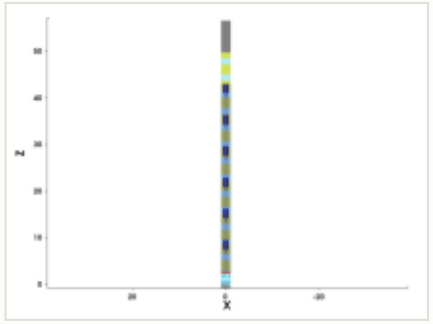

mask for this step

no mask for this step

steps by process area

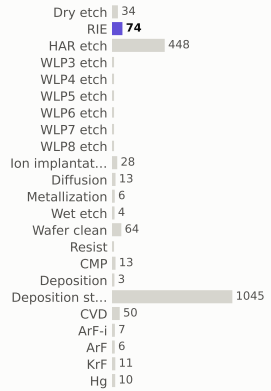

materials deposited (g)

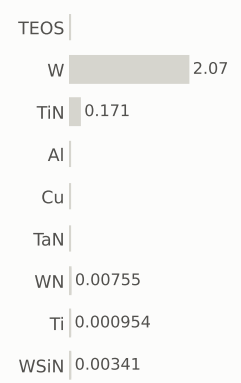

gases emitted (g)

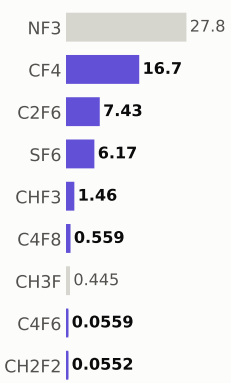

Step #24310: RIE

etch_anisotropic · RIE

1.04	2,561.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

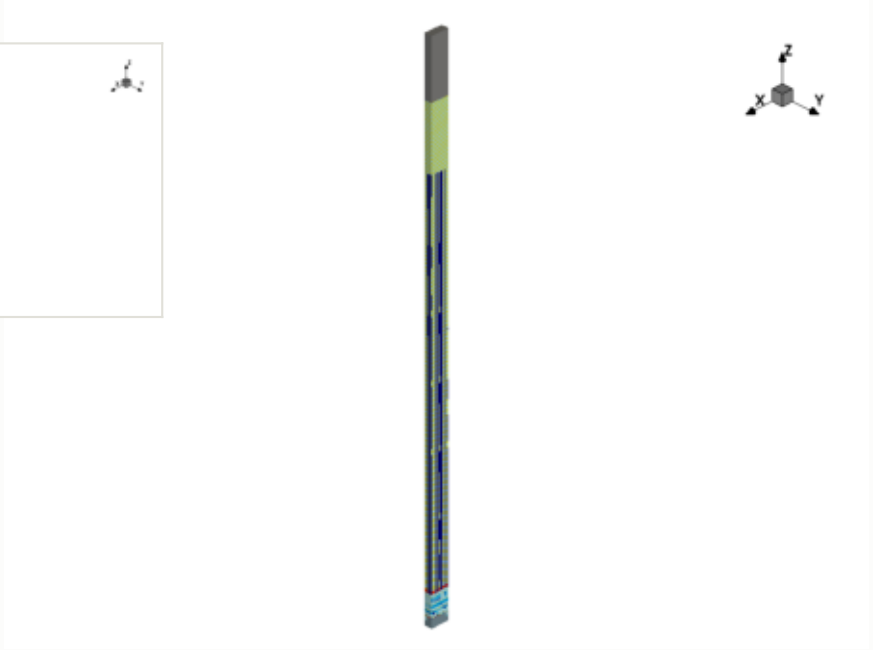

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

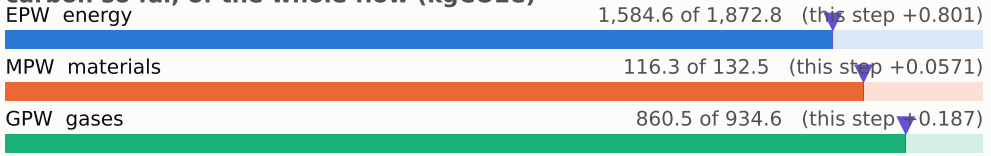

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

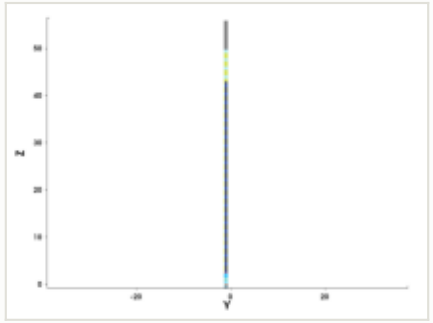

y cut at -1.035 µm

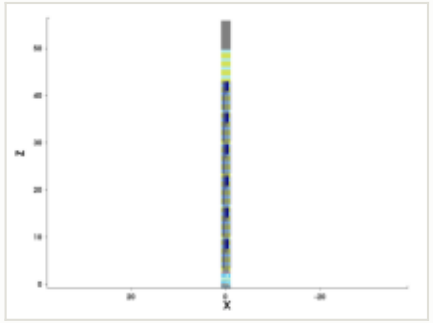

mask for this step

no mask for this step

steps by process area

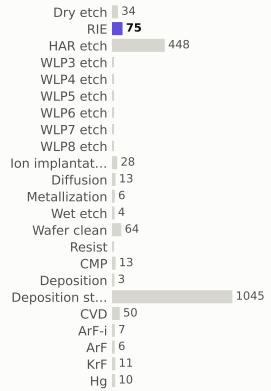

materials deposited (g)

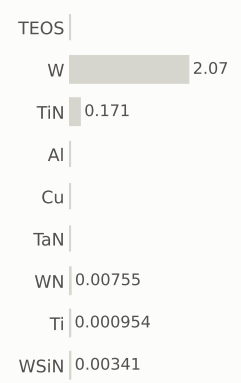

gases emitted (g)

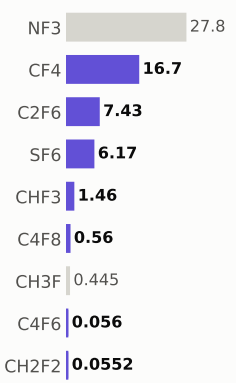

Step #24320: RIE

etch_anisotropic · RIE

1.04	2,562.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

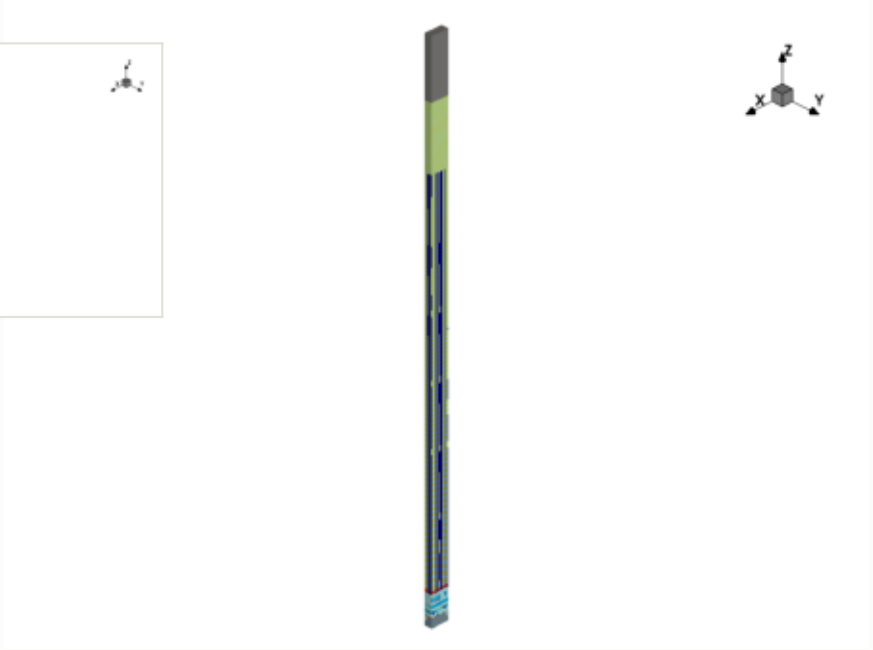

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

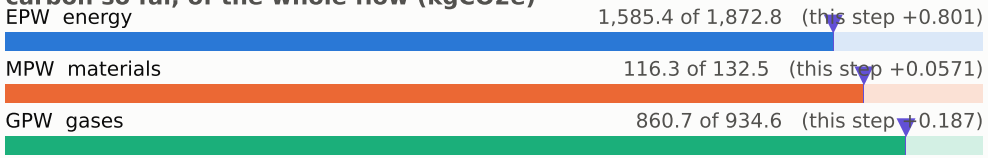

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

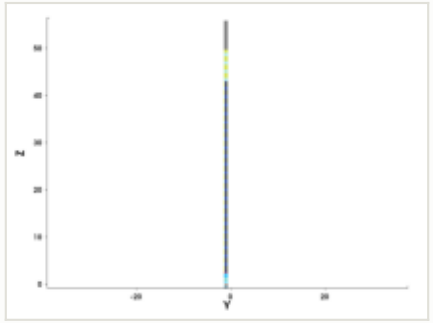

y cut at -1.035 µm

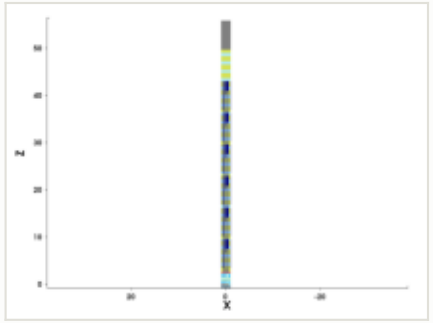

mask for this step

no mask for this step

steps by process area

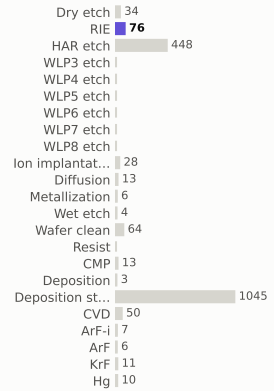

materials deposited (g)

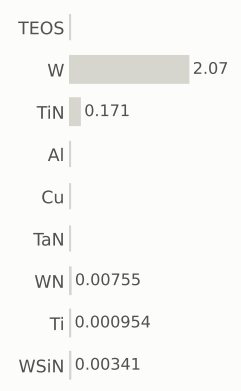

gases emitted (g)

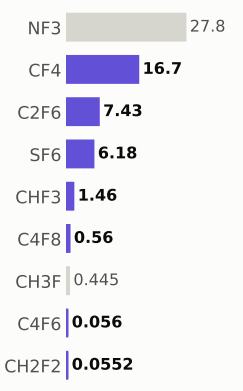

Step #24330: RIE

etch_anisotropic · RIE

1.04	2,563.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

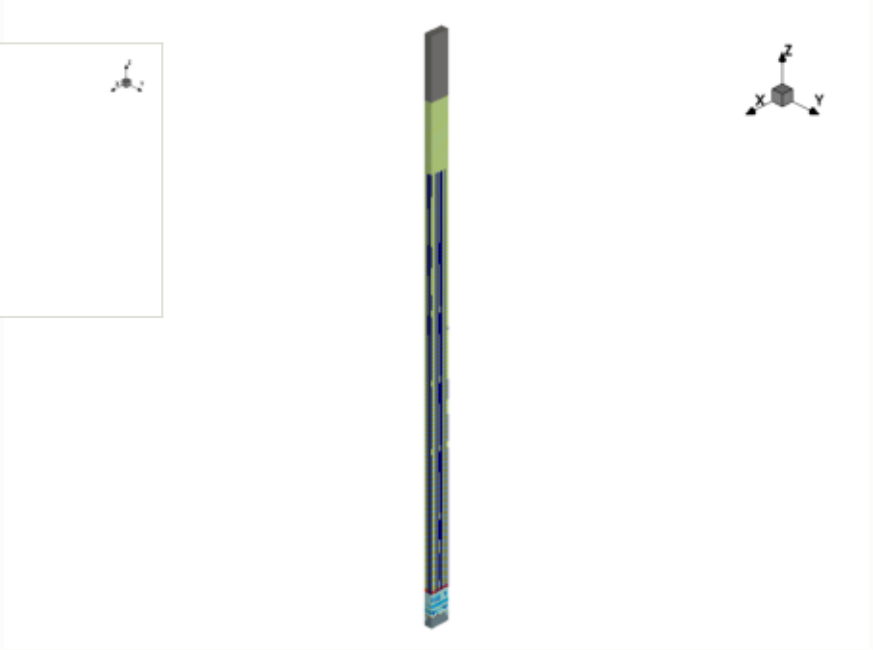

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

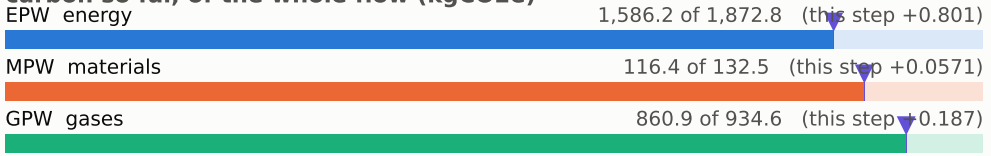

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

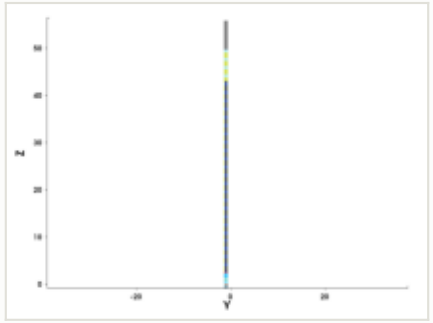

y cut at -1.035 µm

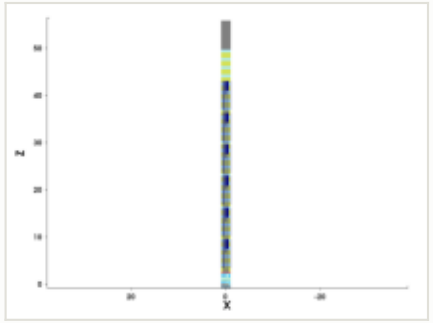

mask for this step

no mask for this step

steps by process area

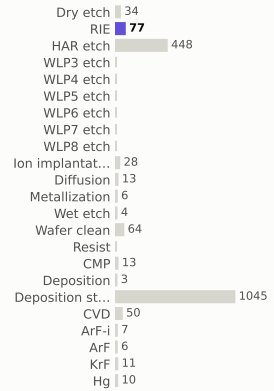

materials deposited (g)

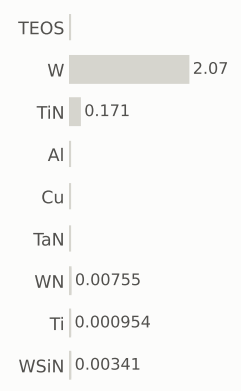

gases emitted (g)

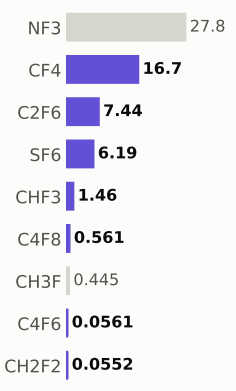

Step #24340: RIE

etch_anisotropic · RIE

1.04	2,564.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

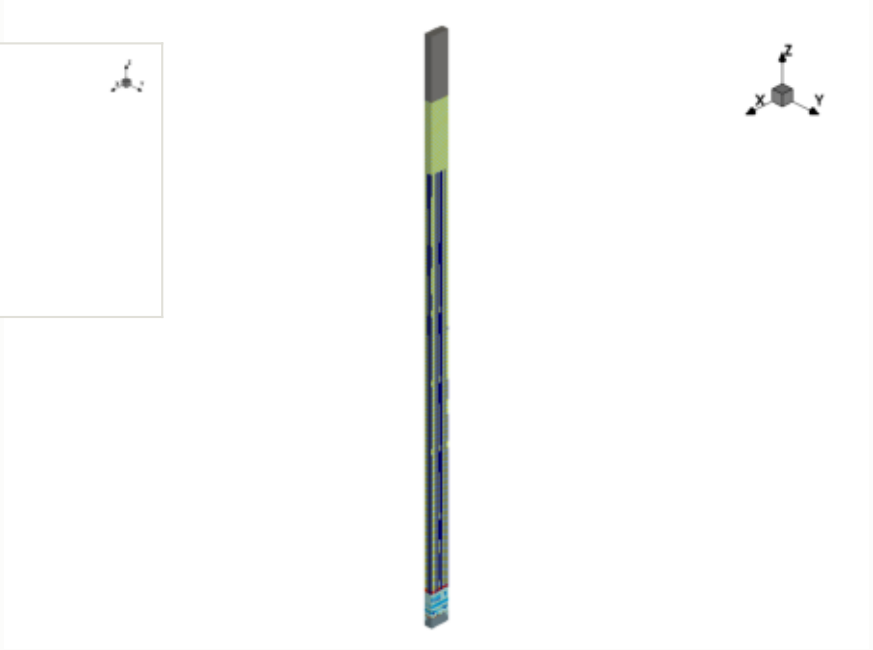

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

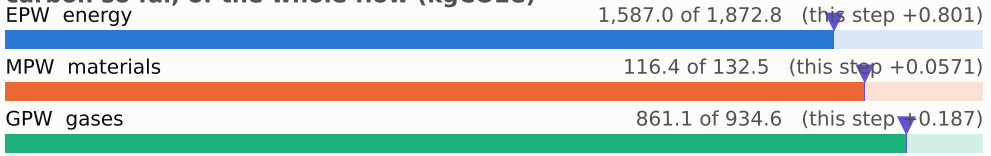

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

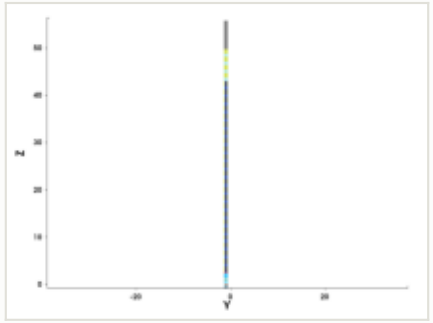

y cut at -1.035 µm

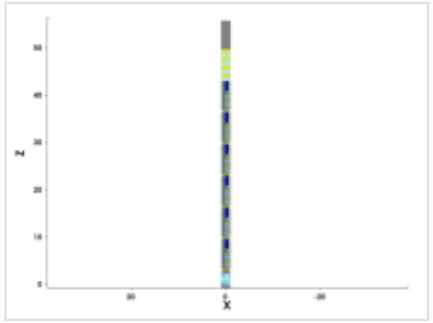

mask for this step

no mask for this step

steps by process area

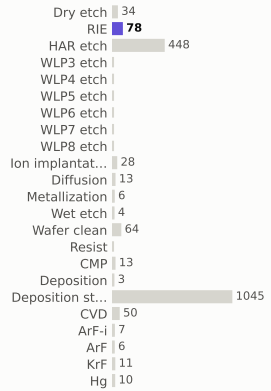

materials deposited (g)

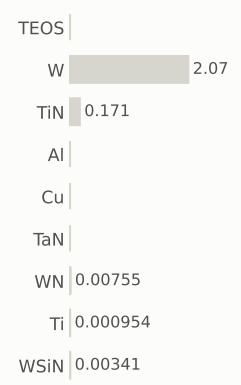

gases emitted (g)

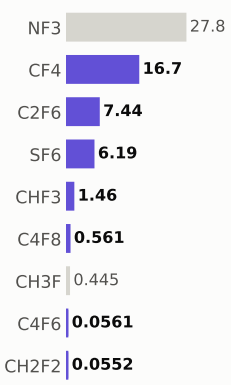

Step #24350: Dry_etch

etch_strip · Dry_etch

0.801	2,565.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

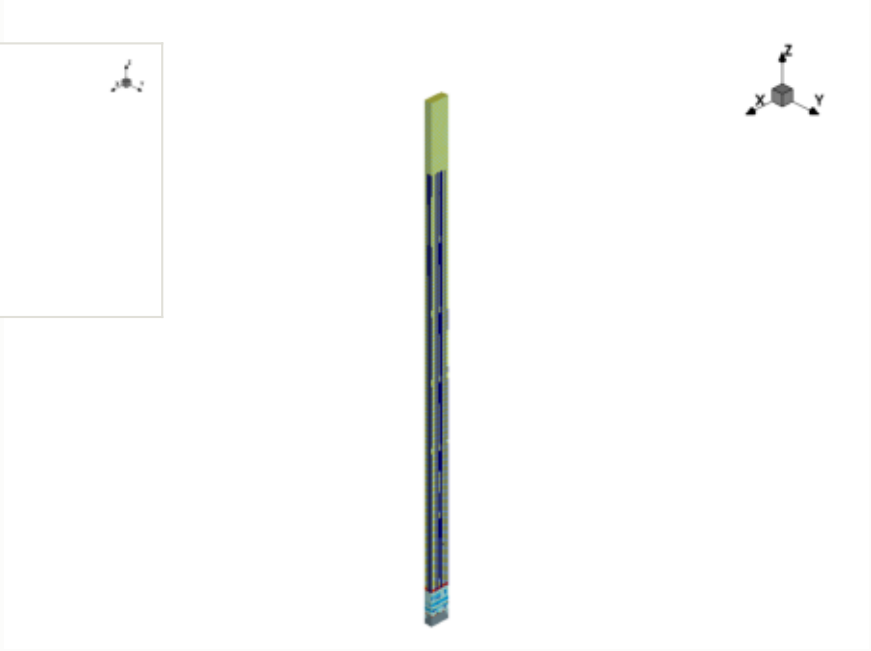

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

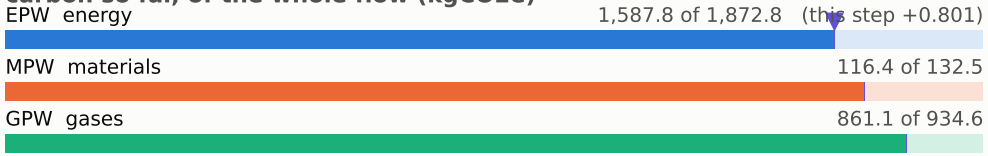

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

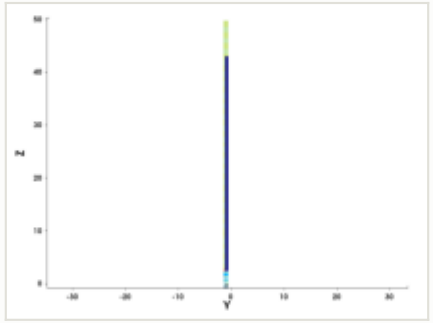

y cut at -1.035 µm

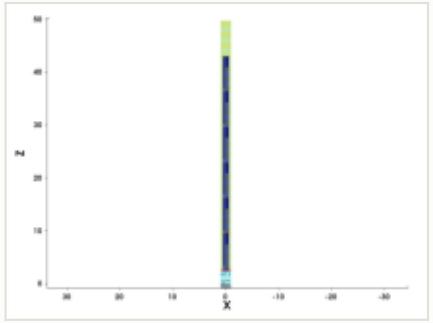

mask for this step

no mask for this step

steps by process area

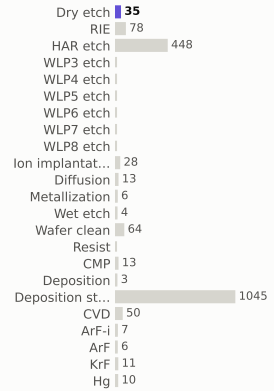

materials deposited (g)

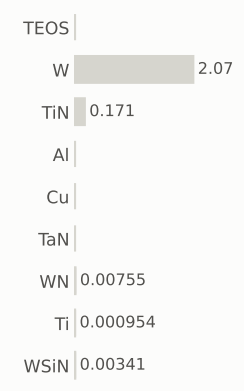

gases emitted (g)

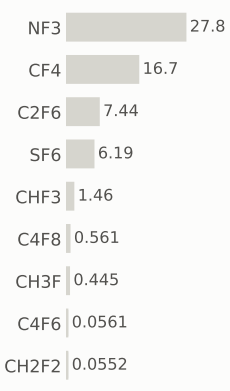

Step #24360: Wafer_clean

clean · Wafer_clean

0.169	2,565.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

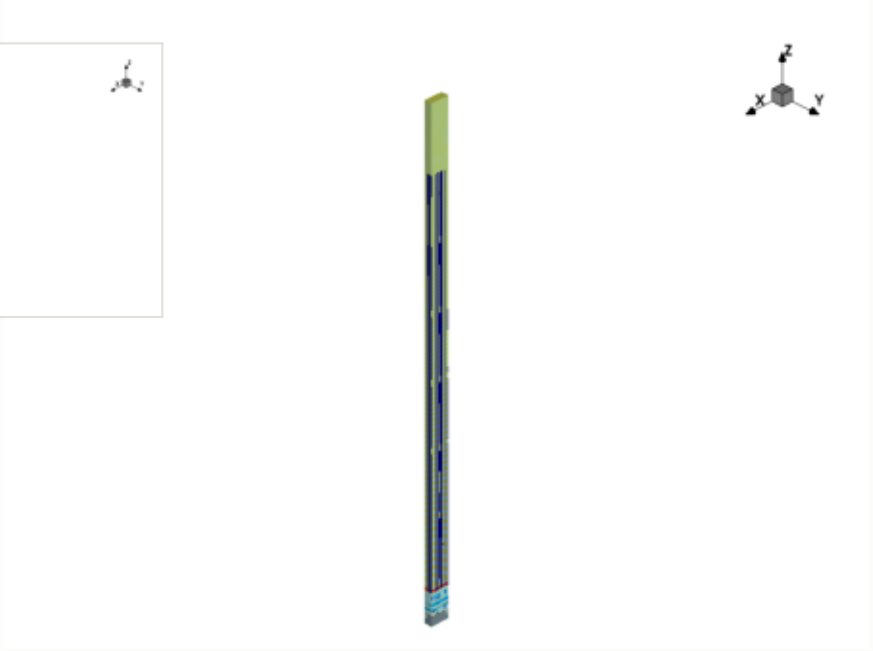

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

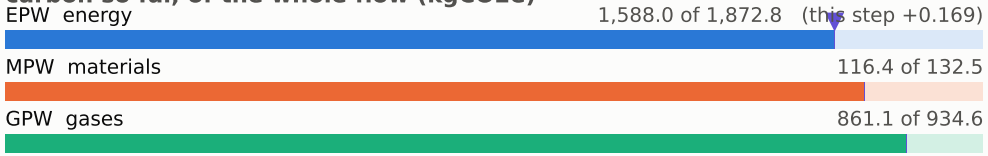

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

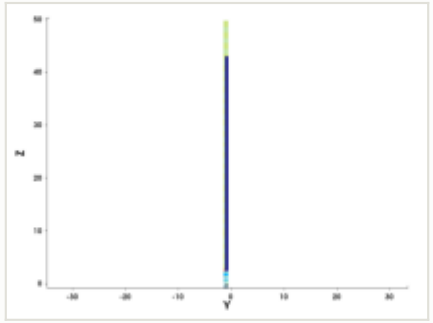

y cut at -1.035 µm

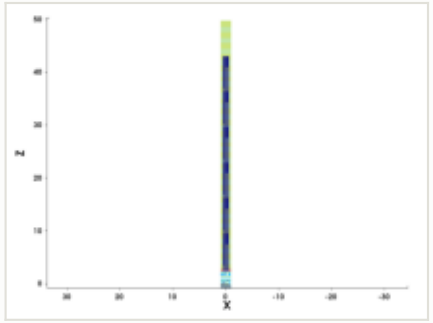

mask for this step

no mask for this step

steps by process area

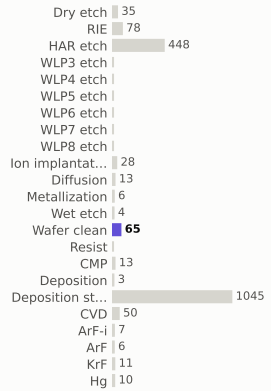

materials deposited (g)

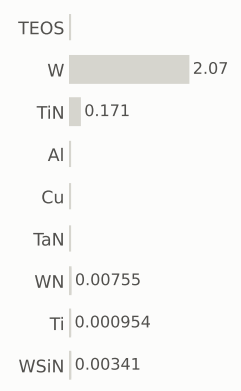

gases emitted (g)

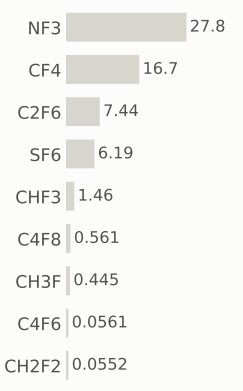

Step #24370: KrF

litho_patterning · KrF

0.199	2,565.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

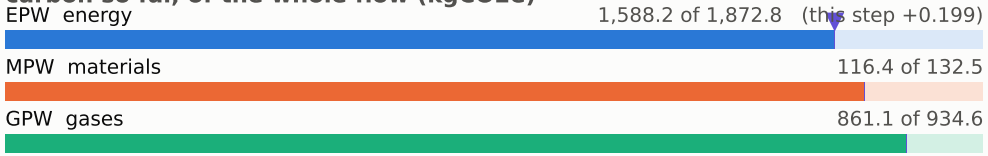

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

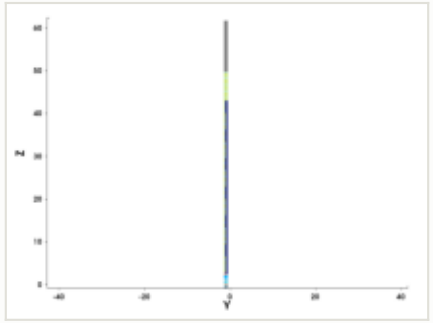

y cut at -1.035 µm

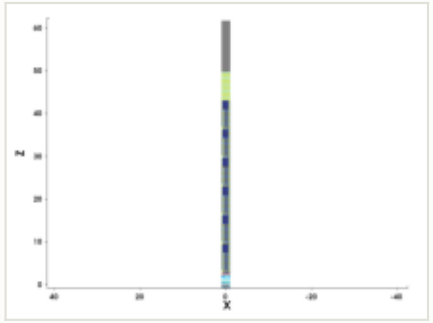

mask: layer 30:0, positive (OASIS)

steps by process area

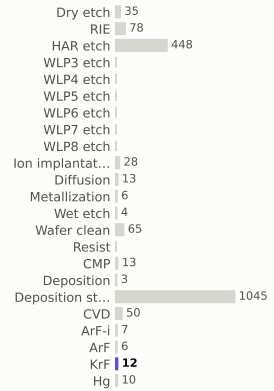

materials deposited (g)

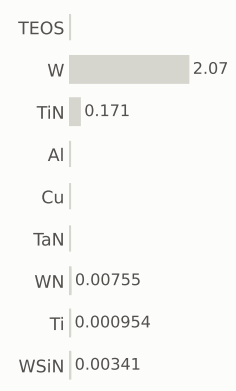

gases emitted (g)

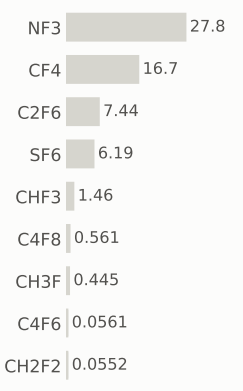

Step #24380: RIE

etch_anisotropic · RIE

1.04	2,566.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

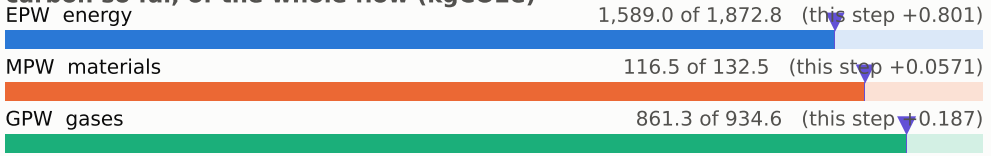

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

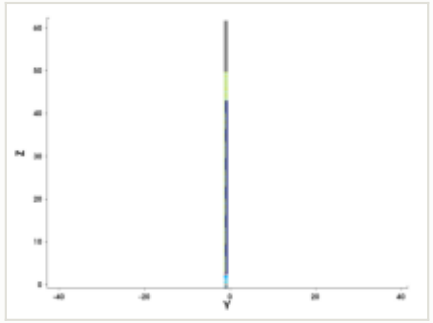

y cut at -1.035 µm

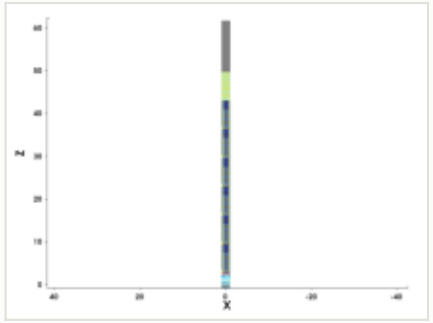

mask for this step

no mask for this step

steps by process area

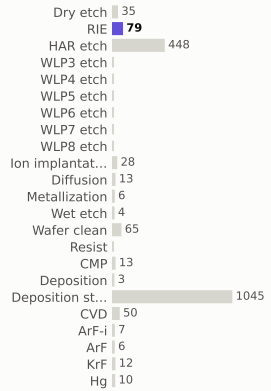

materials deposited (g)

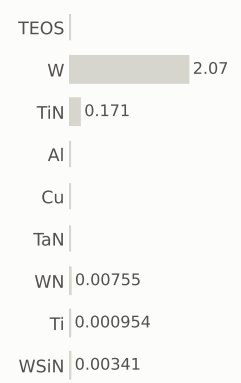

gases emitted (g)

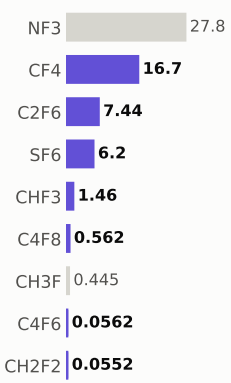

Step #24390: RIE

etch_anisotropic · RIE

1.04	2,567.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

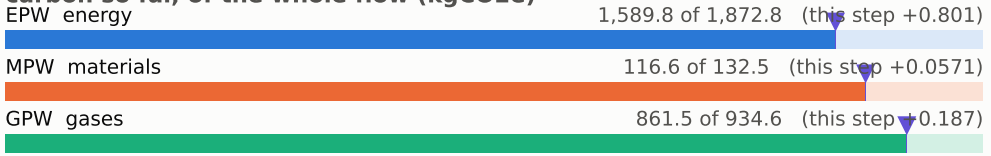

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

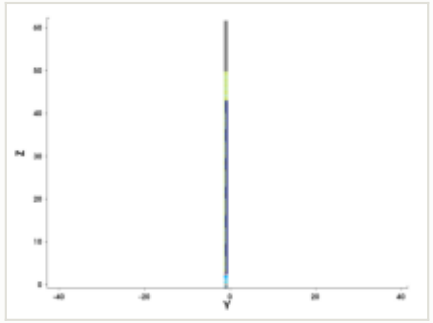

y cut at -1.035 µm

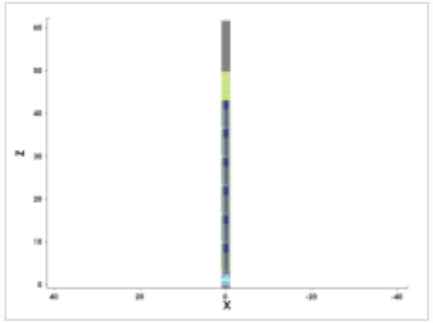

mask for this step

no mask for this step

steps by process area

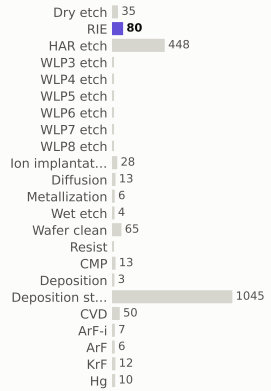

materials deposited (g)

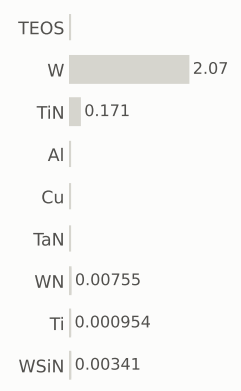

gases emitted (g)

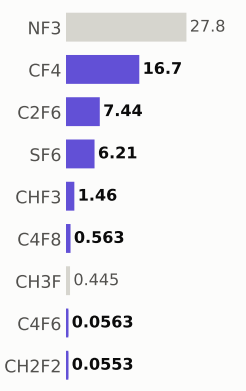

Step #24400: RIE

etch_anisotropic · RIE

1.04	2,568.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

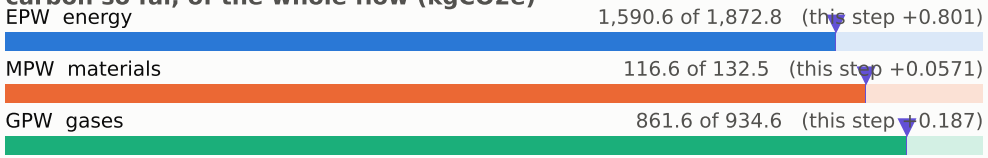

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

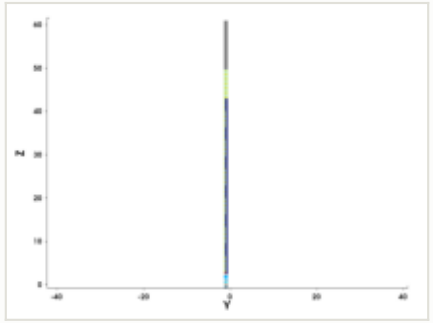

y cut at -1.035 µm

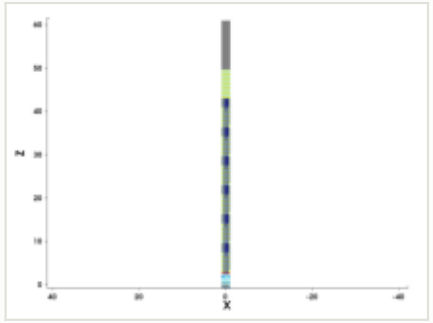

mask for this step

no mask for this step

steps by process area

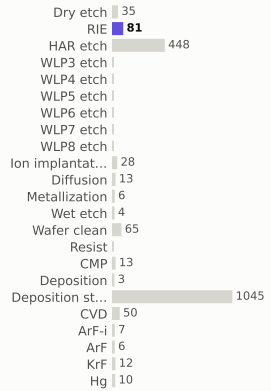

materials deposited (g)

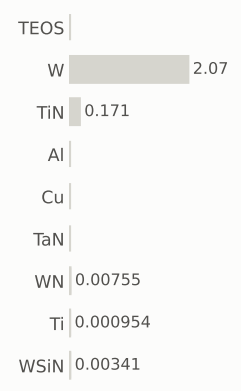

gases emitted (g)

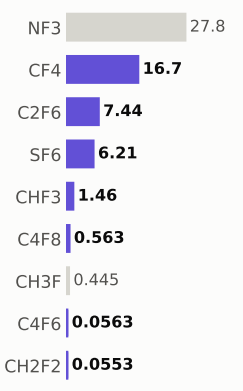

Step #24410: RIE

etch_anisotropic · RIE

1.04	2,569.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

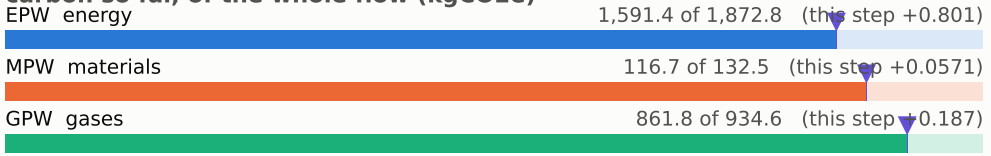

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

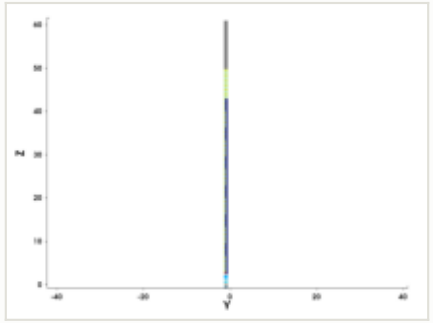

y cut at -1.035 µm

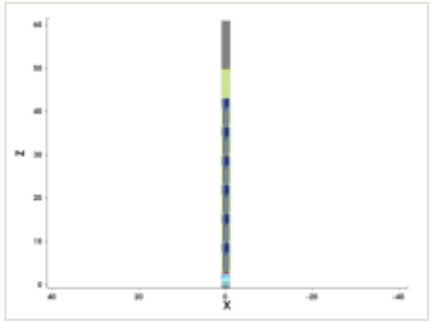

mask for this step

no mask for this step

steps by process area

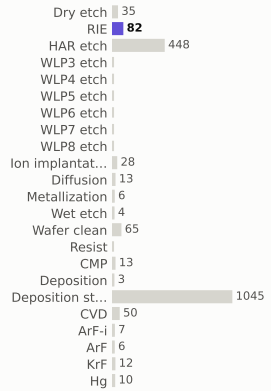

materials deposited (g)

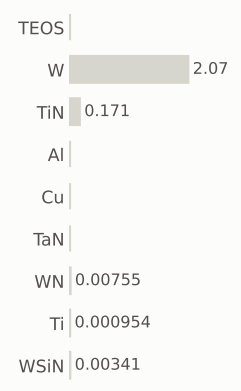

gases emitted (g)

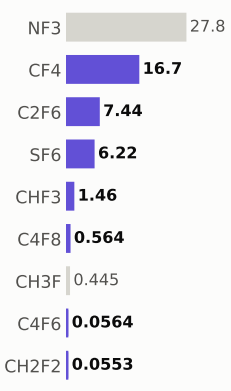

Step #24420: RIE

etch_anisotropic · RIE

1.04	2,570.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

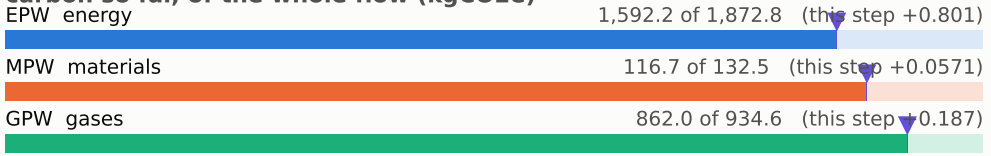

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

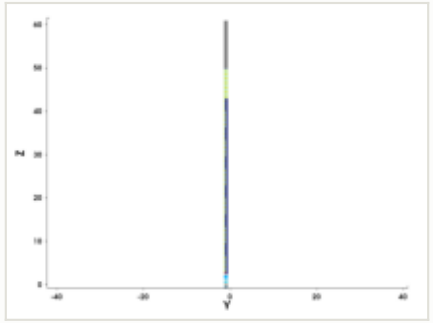

y cut at -1.035 µm

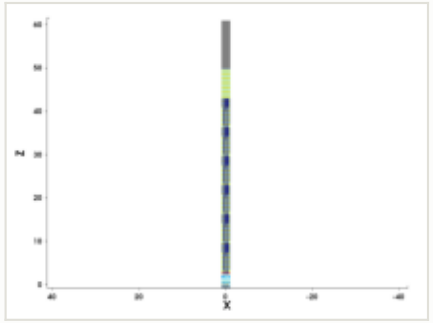

mask for this step

no mask for this step

steps by process area

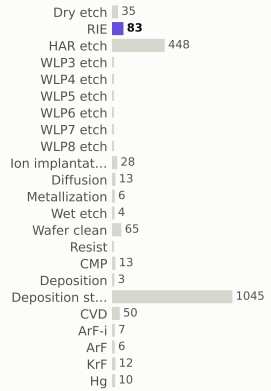

materials deposited (g)

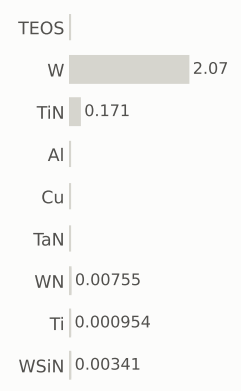

gases emitted (g)

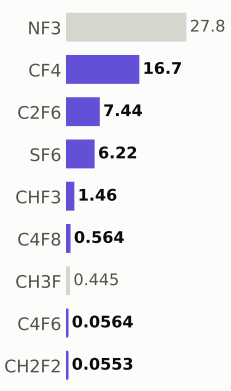

Step #24430: RIE

etch_anisotropic · RIE

1.04	2,572.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

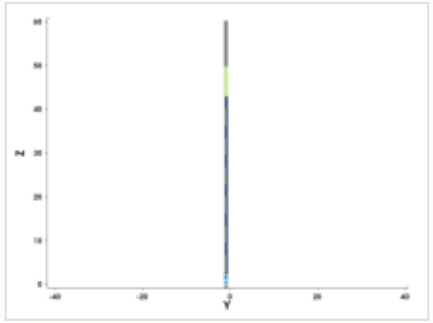

y cut at -1.035 µm

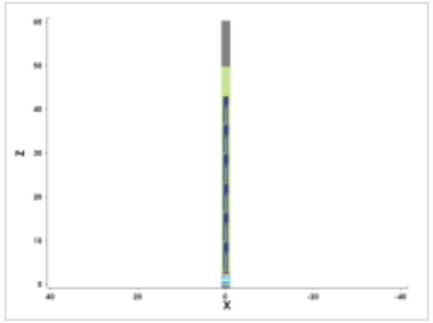

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

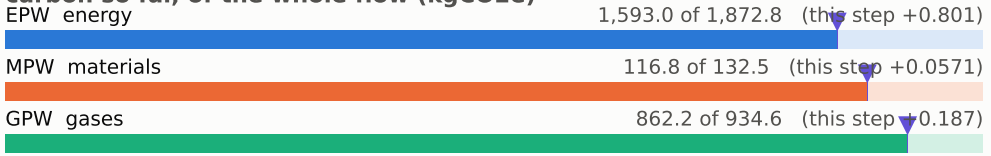

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

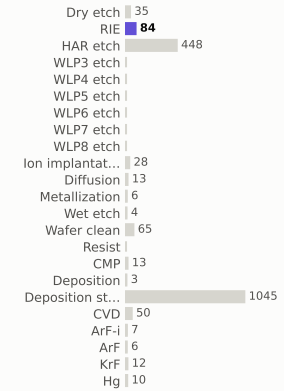

materials deposited (g)

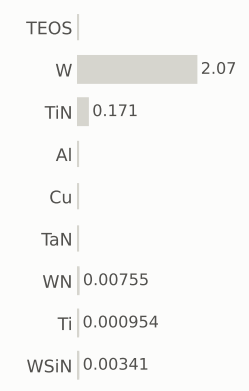

gases emitted (g)

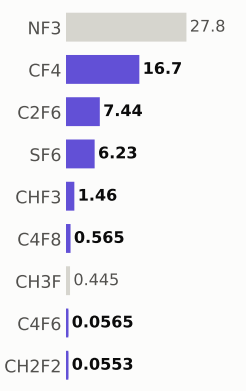

Step #24440: RIE

etch_anisotropic · RIE

1.04	2,573.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

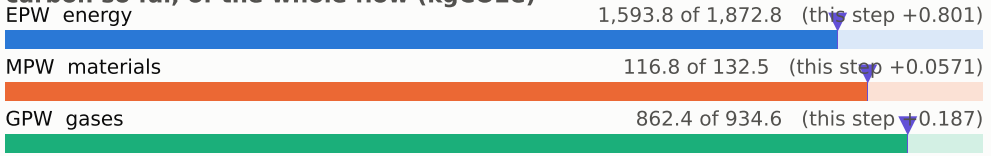

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

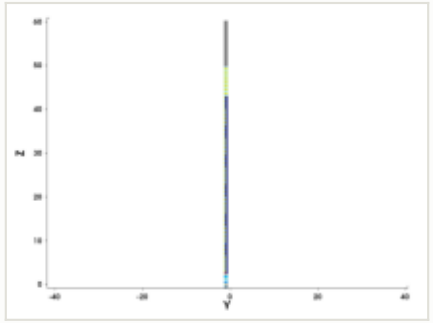

y cut at -1.035 µm

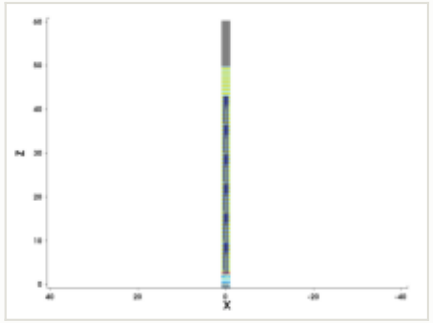

mask for this step

no mask for this step

steps by process area

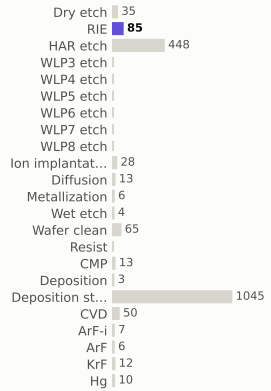

materials deposited (g)

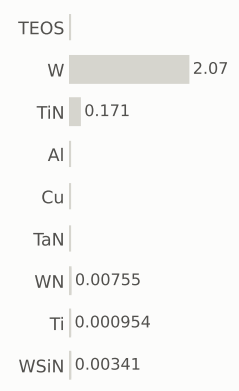

gases emitted (g)

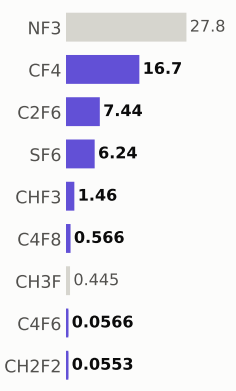

Step #24450: RIE

etch_anisotropic · RIE

1.04	2,574.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

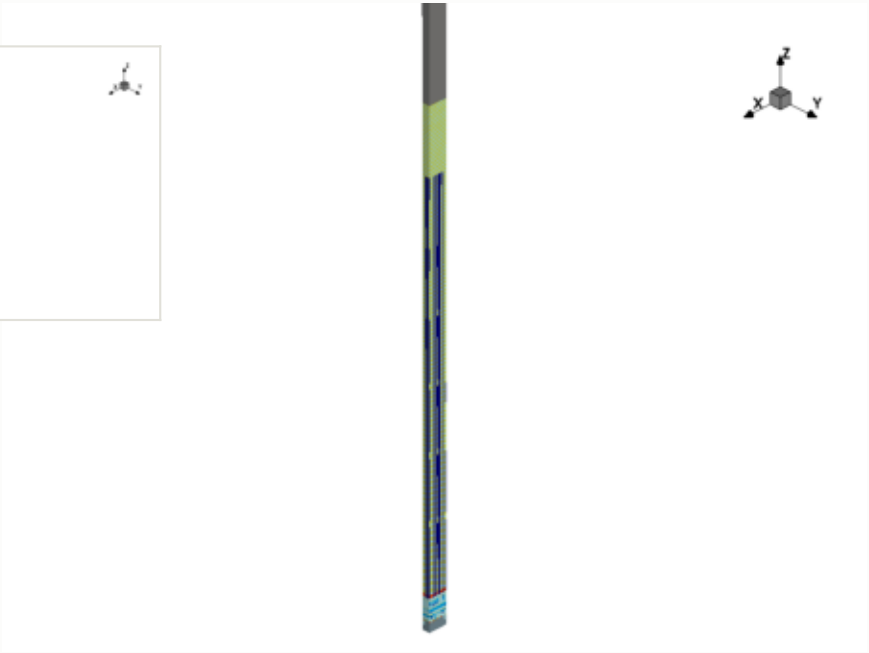

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

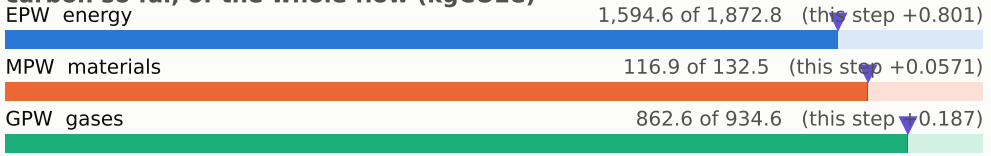

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

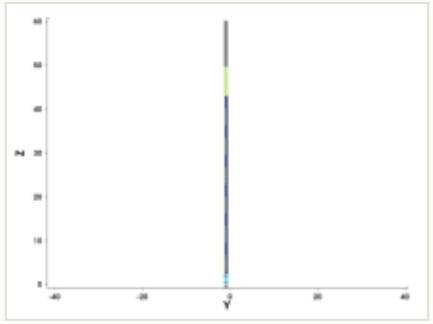

y cut at -1.035 µm

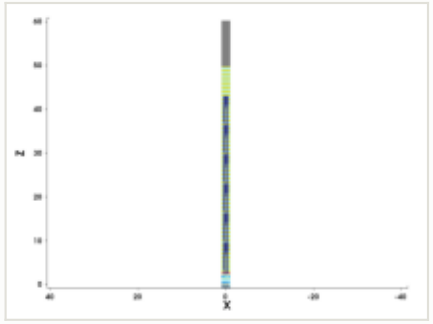

mask for this step

no mask for this step

steps by process area

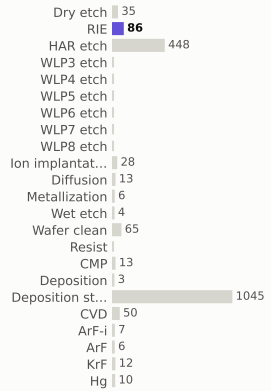

materials deposited (g)

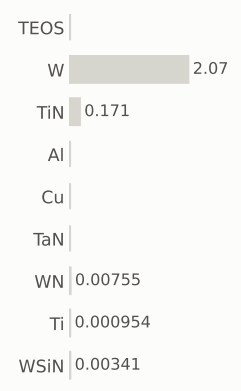

gases emitted (g)

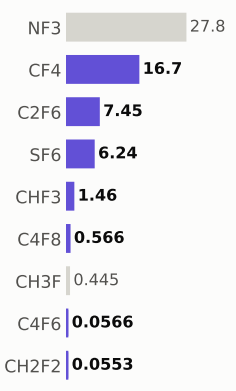

Step #24460: RIE

etch_anisotropic · RIE

1.04	2,575.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

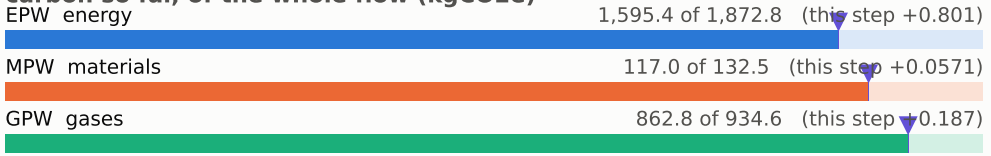

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

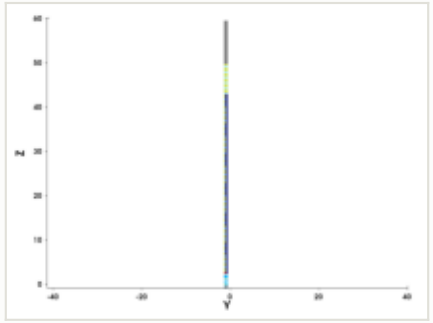

y cut at -1.035 µm

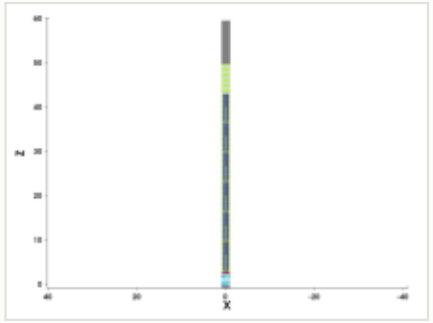

mask for this step

no mask for this step

steps by process area

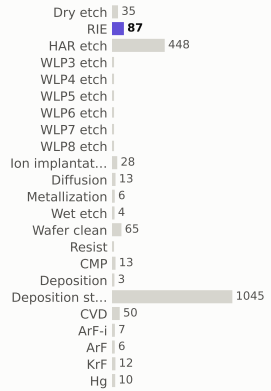

materials deposited (g)

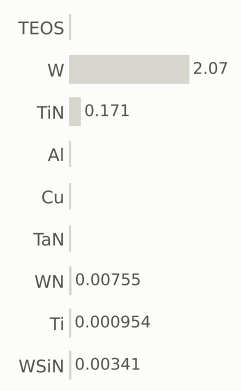

gases emitted (g)

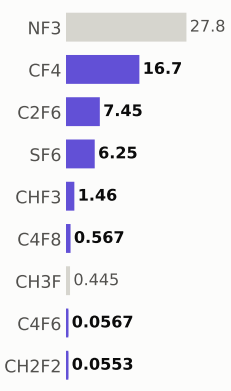

Step #24470: RIE

etch_anisotropic · RIE

1.04	2,576.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

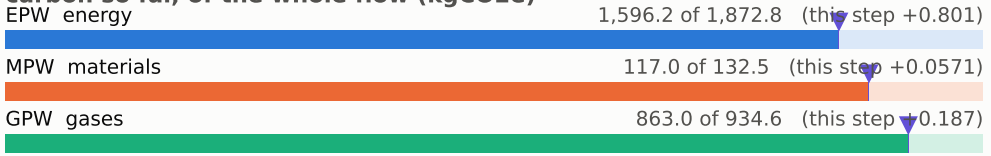

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

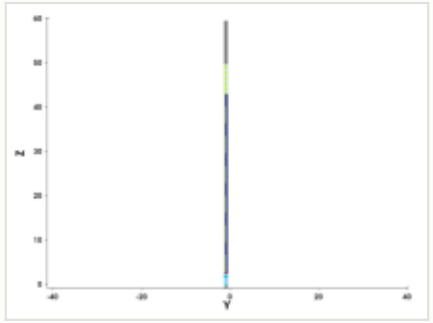

y cut at -1.035 µm

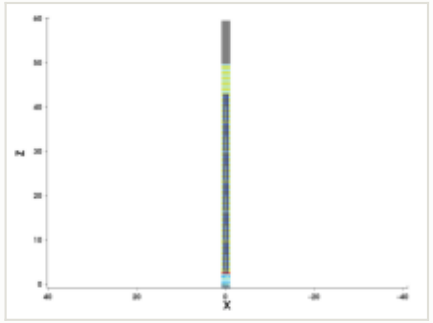

mask for this step

no mask for this step

steps by process area

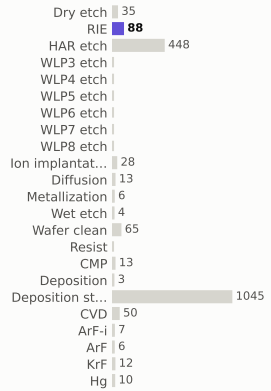

materials deposited (g)

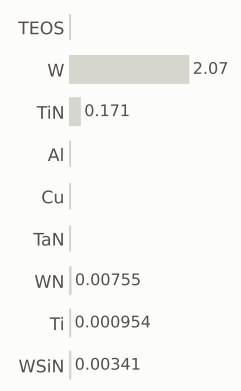

gases emitted (g)

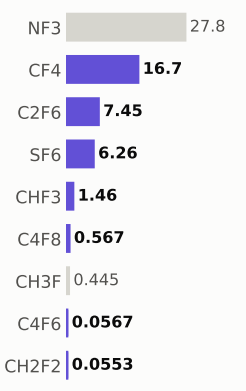

Step #24480: RIE

etch_anisotropic · RIE

1.04	2,577.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

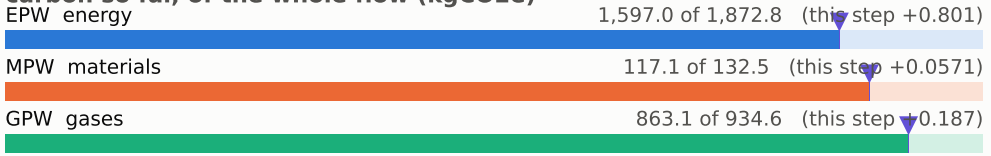

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

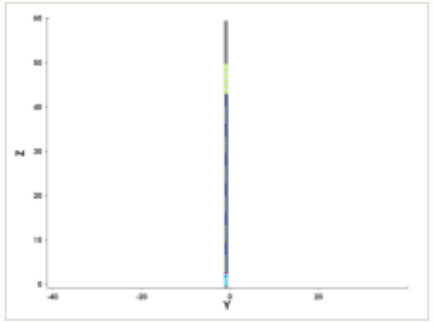

y cut at -1.035 µm

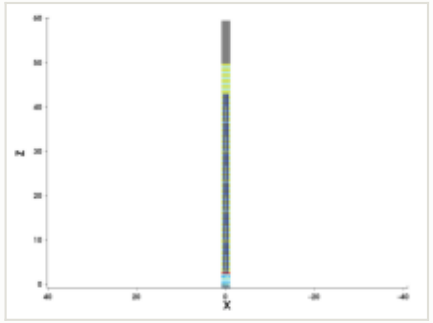

mask for this step

no mask for this step

steps by process area

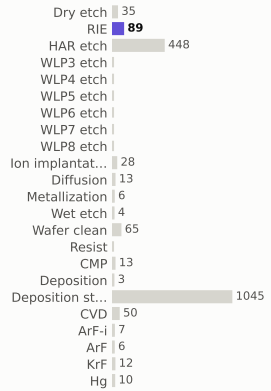

materials deposited (g)

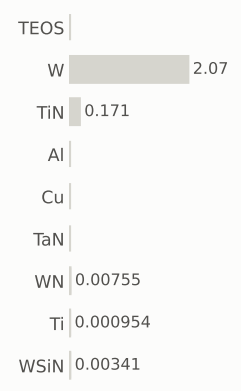

gases emitted (g)

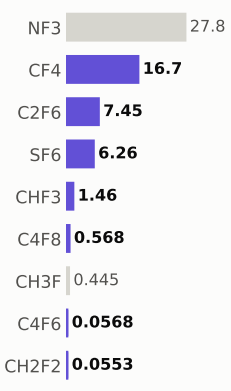

Step #24490: RIE

etch_anisotropic · RIE

1.04	2,578.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

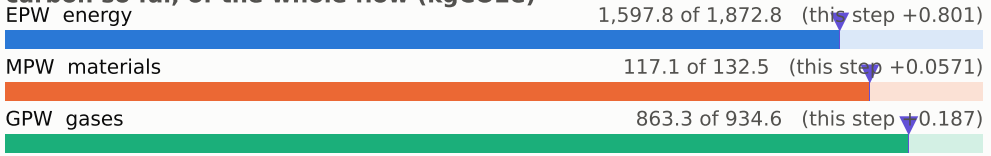

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

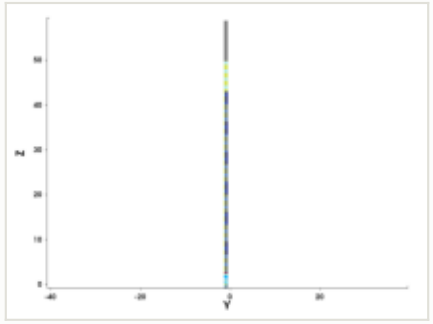

y cut at -1.035 µm

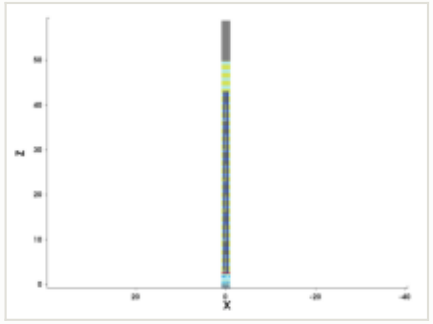

mask for this step

no mask for this step

steps by process area

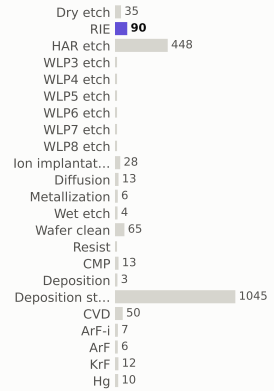

materials deposited (g)

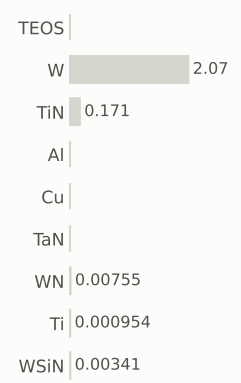

gases emitted (g)

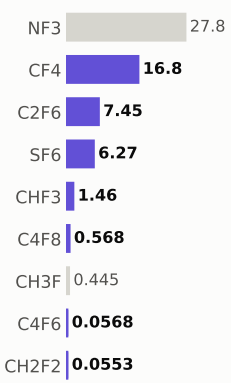

Step #24500: RIE

etch_anisotropic · RIE

1.04	2,579.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

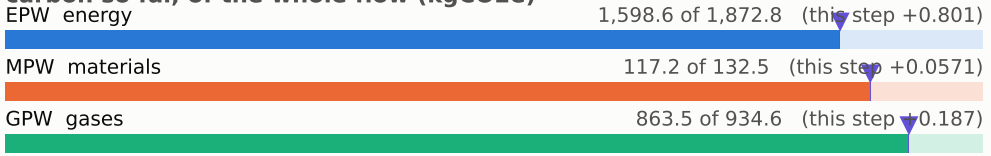

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

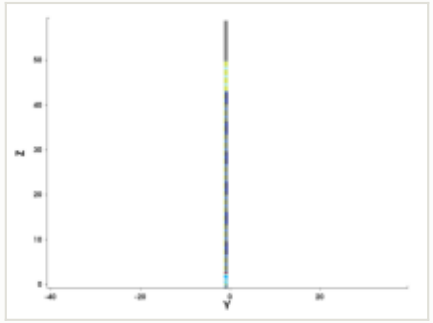

y cut at -1.035 µm

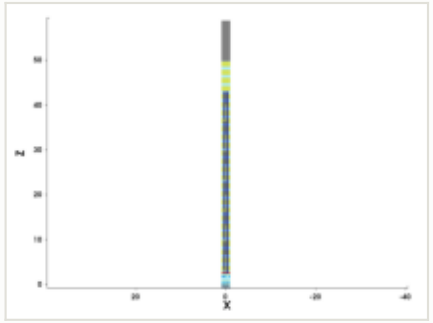

mask for this step

no mask for this step

steps by process area

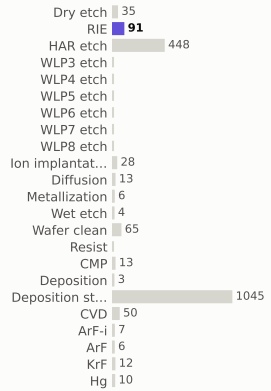

materials deposited (g)

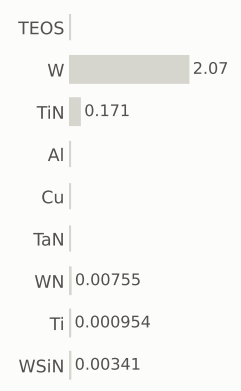

gases emitted (g)

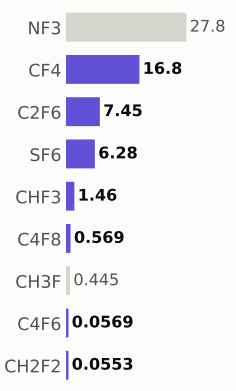

Step #24510: RIE

etch_anisotropic · RIE

1.04	2,580.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

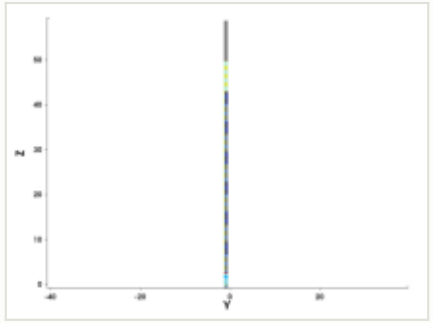

y cut at -1.035 µm

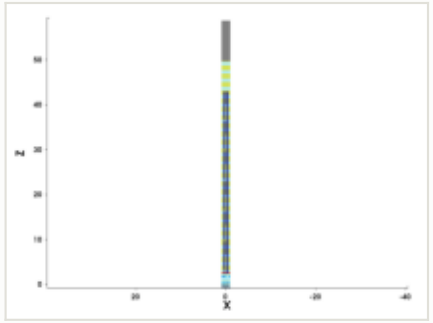

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

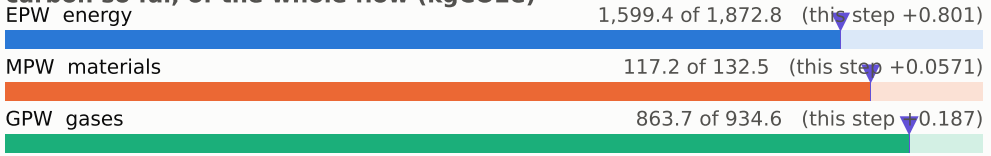

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

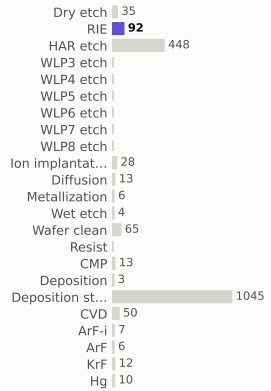

materials deposited (g)

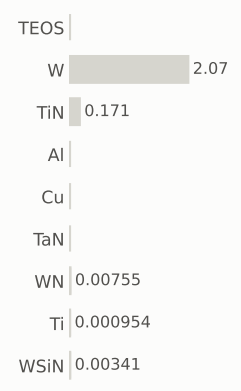

gases emitted (g)

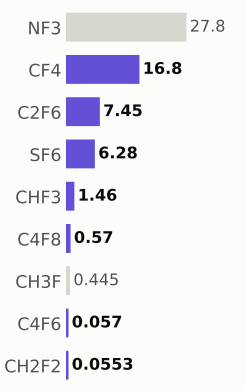

Step #24520: RIE

etch_anisotropic · RIE

1.04	2,581.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

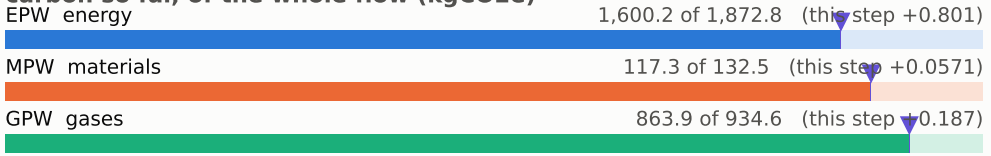

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

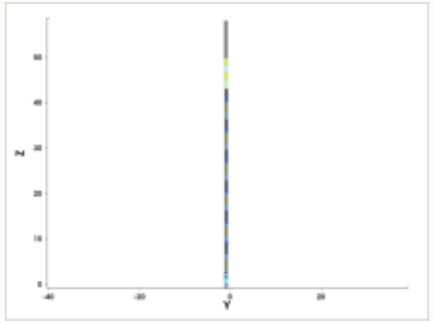

y cut at -1.035 µm

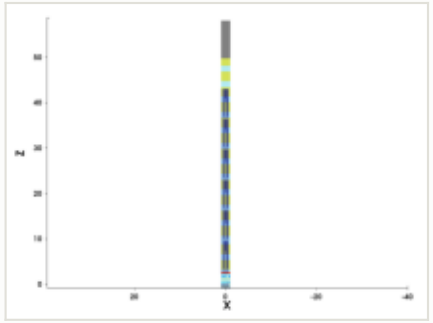

mask for this step

no mask for this step

steps by process area

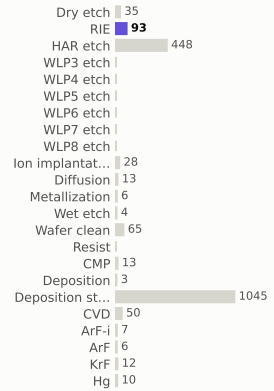

materials deposited (g)

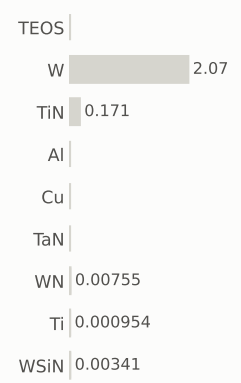

gases emitted (g)

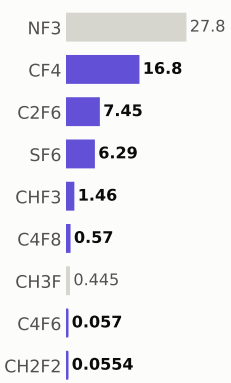

Step #24530: RIE

etch_anisotropic · RIE

1.04	2,582.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

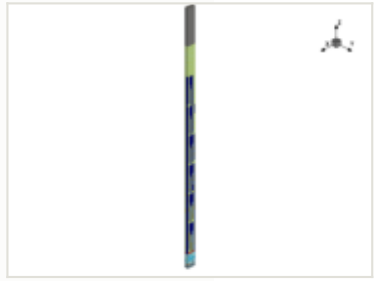

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

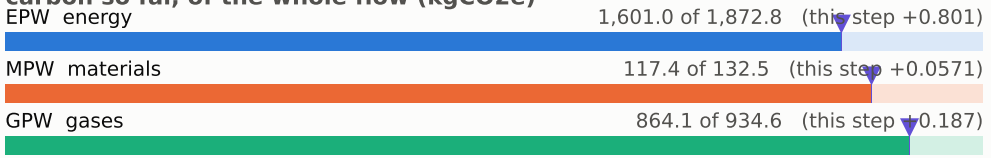

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

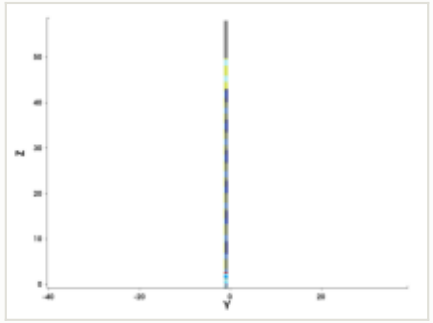

y cut at -1.035 µm

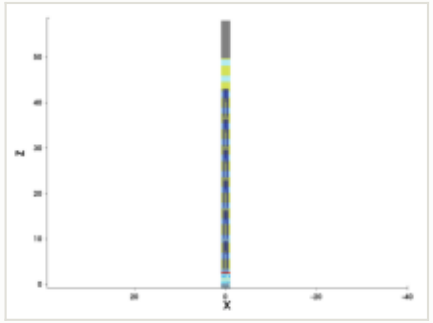

mask for this step

no mask for this step

steps by process area

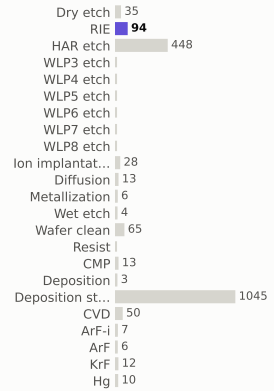

materials deposited (g)

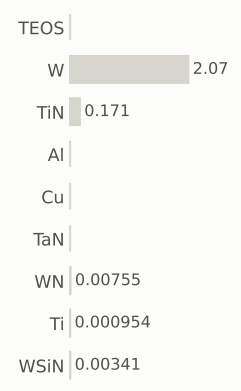

gases emitted (g)

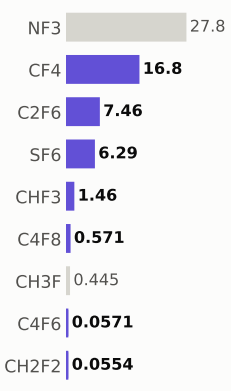

Step #24540: RIE

etch_anisotropic · RIE

1.04	2,583.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

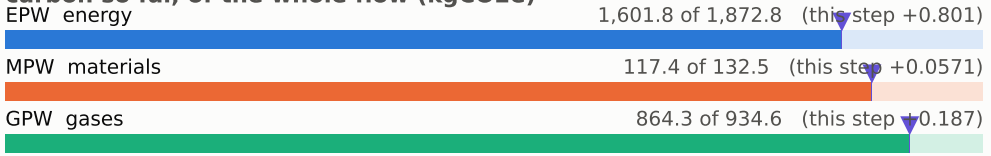

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

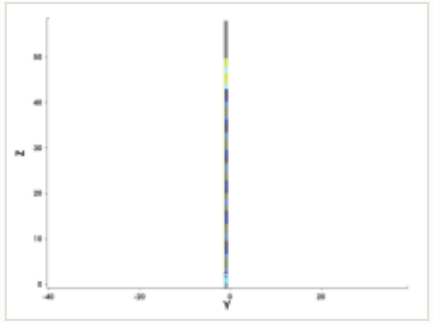

y cut at -1.035 µm

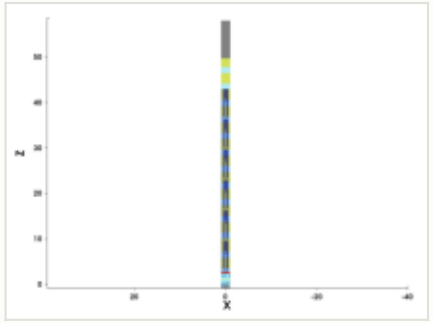

mask for this step

no mask for this step

steps by process area

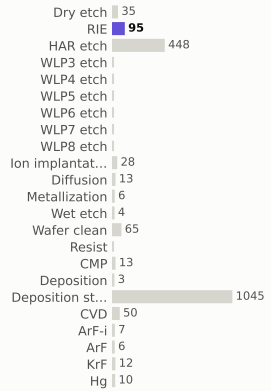

materials deposited (g)

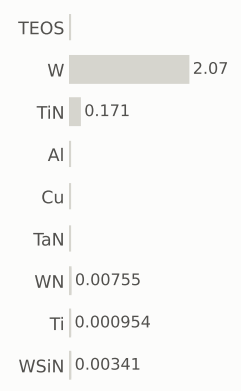

gases emitted (g)

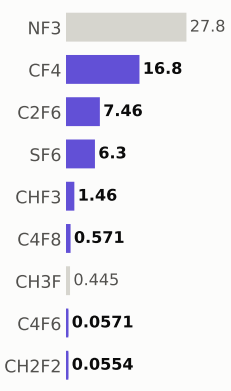

Step #24550: RIE

etch_anisotropic · RIE

1.04	2,584.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

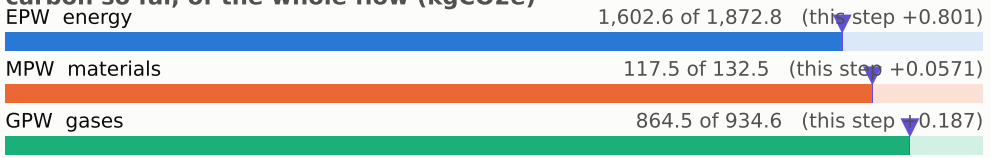

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

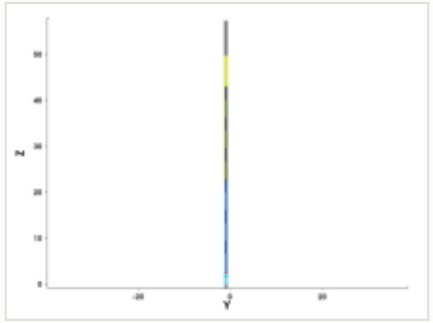

y cut at -1.035 µm

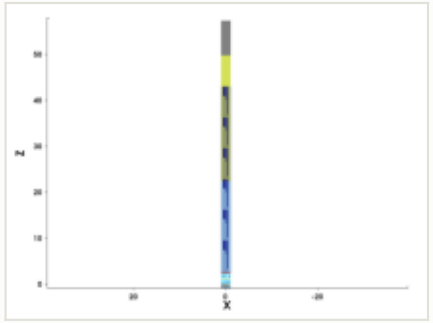

mask for this step

no mask for this step

steps by process area

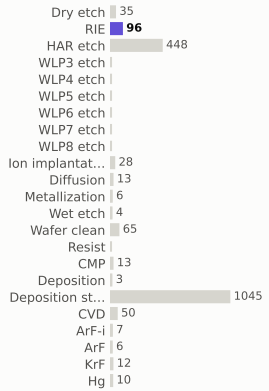

materials deposited (g)

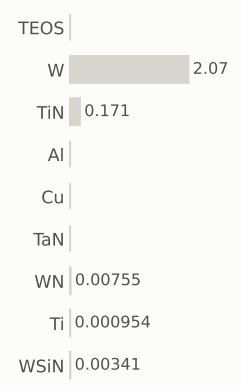

gases emitted (g)

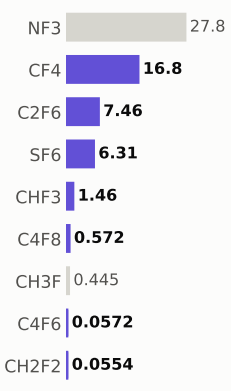

Step #24560: RIE

etch_anisotropic · RIE

1.04	2,585.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

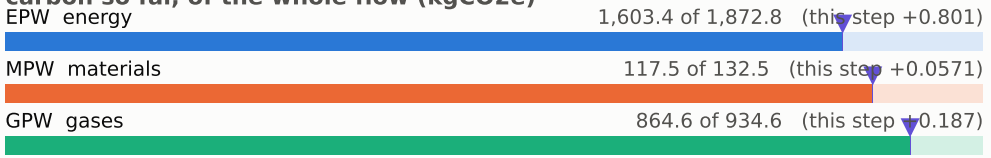

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

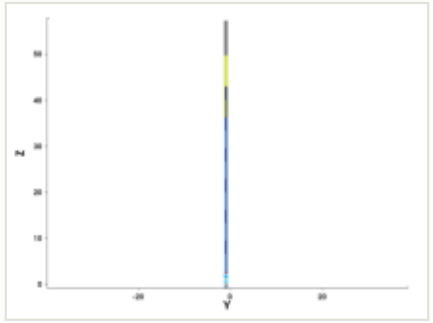

y cut at -1.035 µm

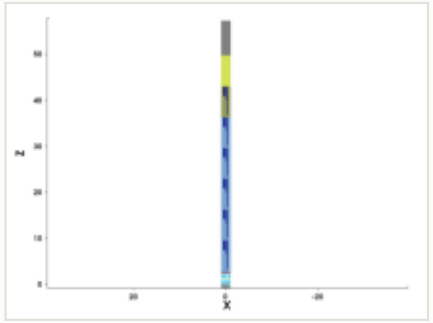

mask for this step

no mask for this step

steps by process area

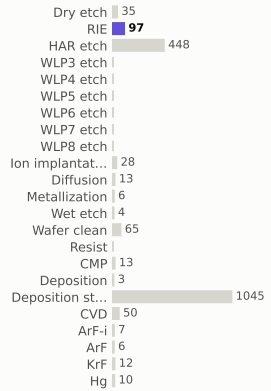

materials deposited (g)

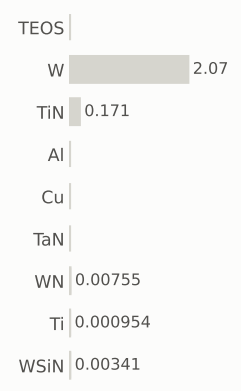

gases emitted (g)

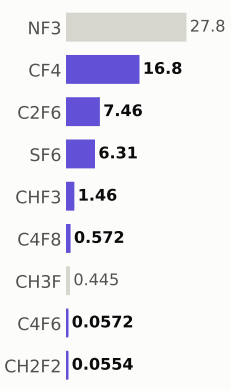

Step #24570: RIE

etch_anisotropic · RIE

1.04	2,586.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

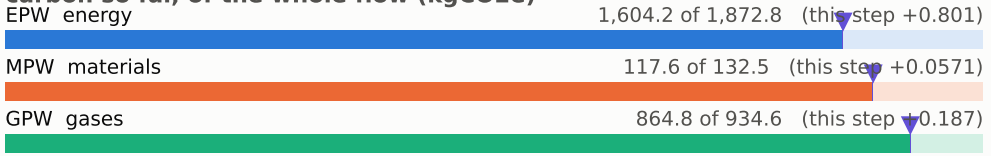

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

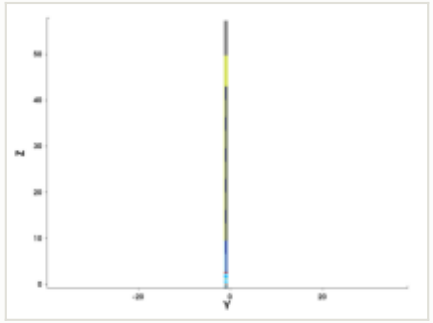

y cut at -1.035 µm

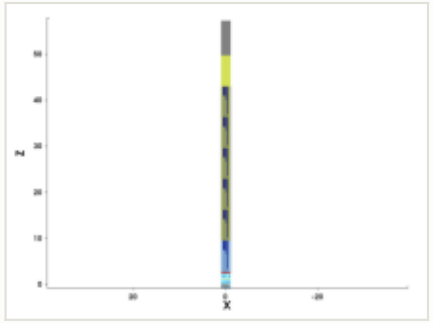

mask for this step

no mask for this step

steps by process area

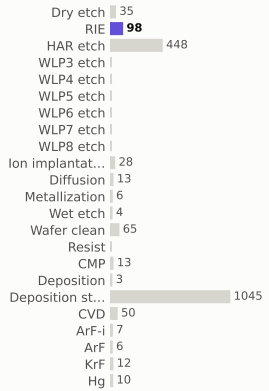

materials deposited (g)

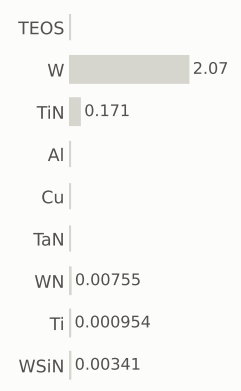

gases emitted (g)

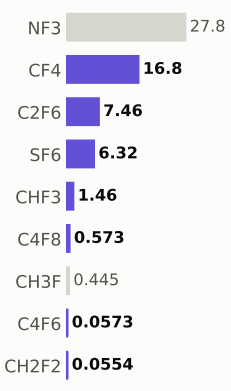

Step #24580: RIE

etch_anisotropic · RIE

1.04	2,587.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

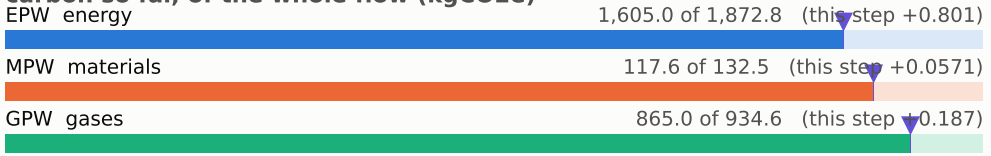

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

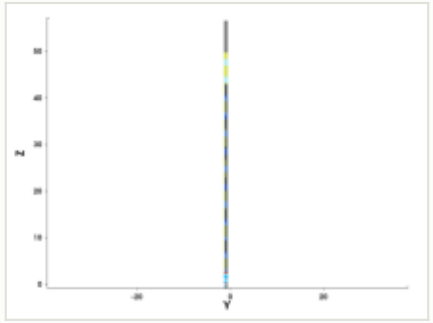

y cut at -1.035 µm

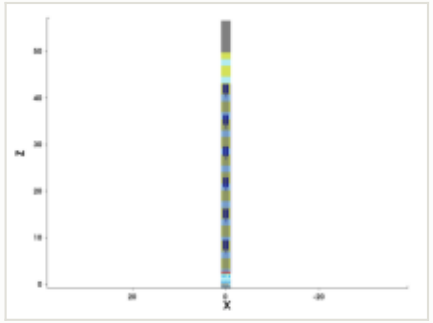

mask for this step

no mask for this step

steps by process area

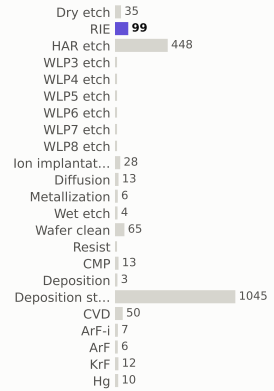

materials deposited (g)

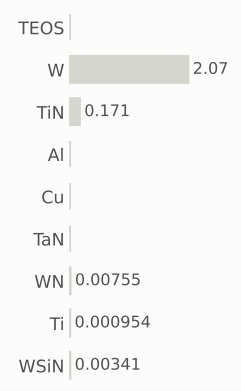

gases emitted (g)

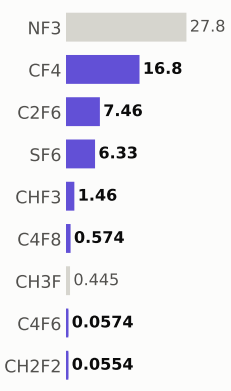

Step #24590: RIE

etch_anisotropic · RIE

1.04	2,588.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

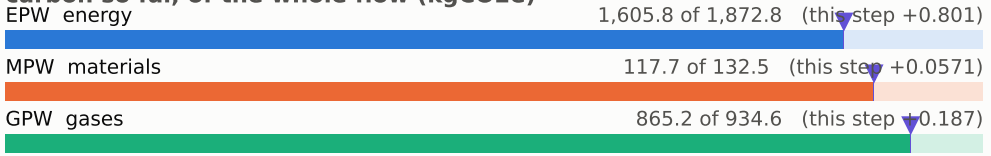

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

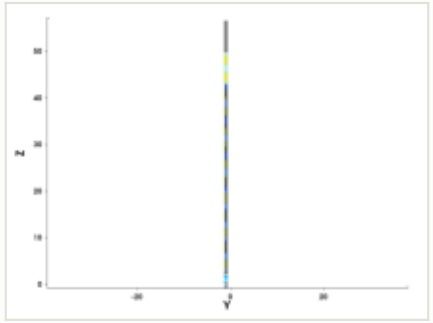

y cut at -1.035 µm

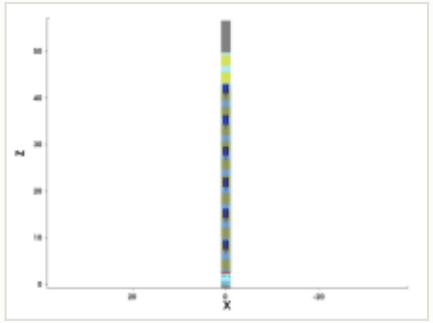

mask for this step

no mask for this step

steps by process area

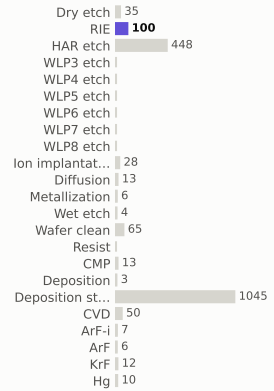

materials deposited (g)

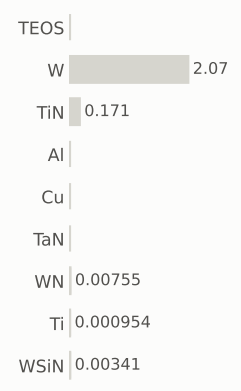

gases emitted (g)

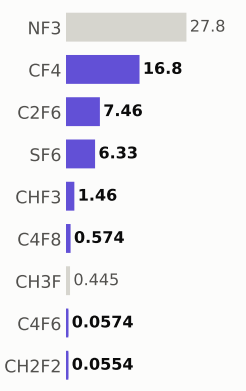

Step #24600: RIE

etch_anisotropic · RIE

1.04	2,589.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

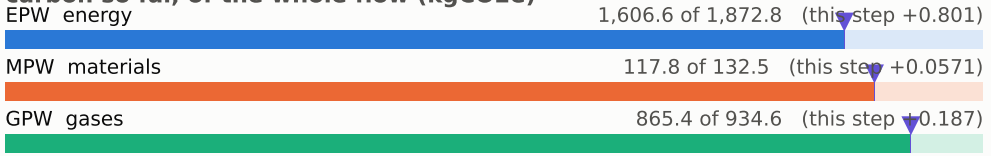

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

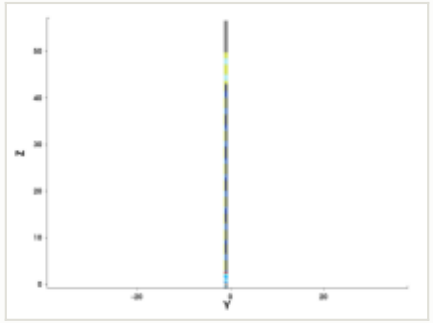

y cut at -1.035 µm

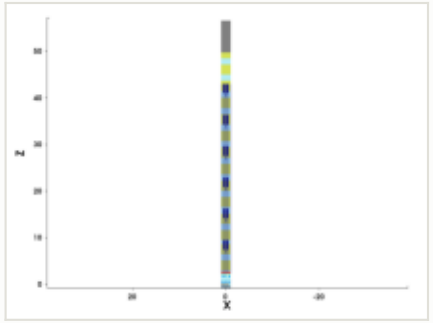

mask for this step

no mask for this step

steps by process area

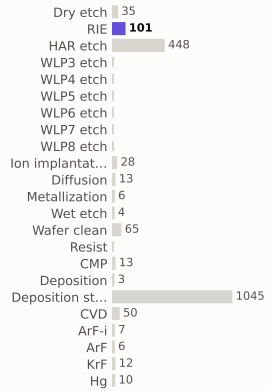

materials deposited (g)

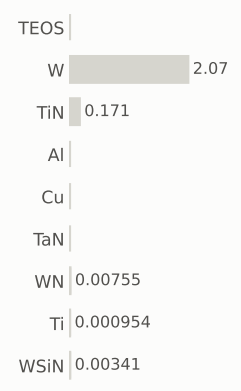

gases emitted (g)

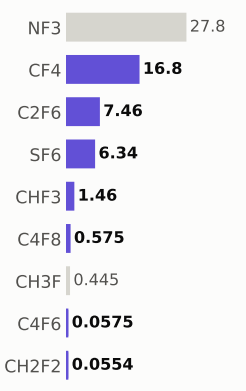

Step #24610: RIE

etch_anisotropic · RIE

1.04	2,590.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

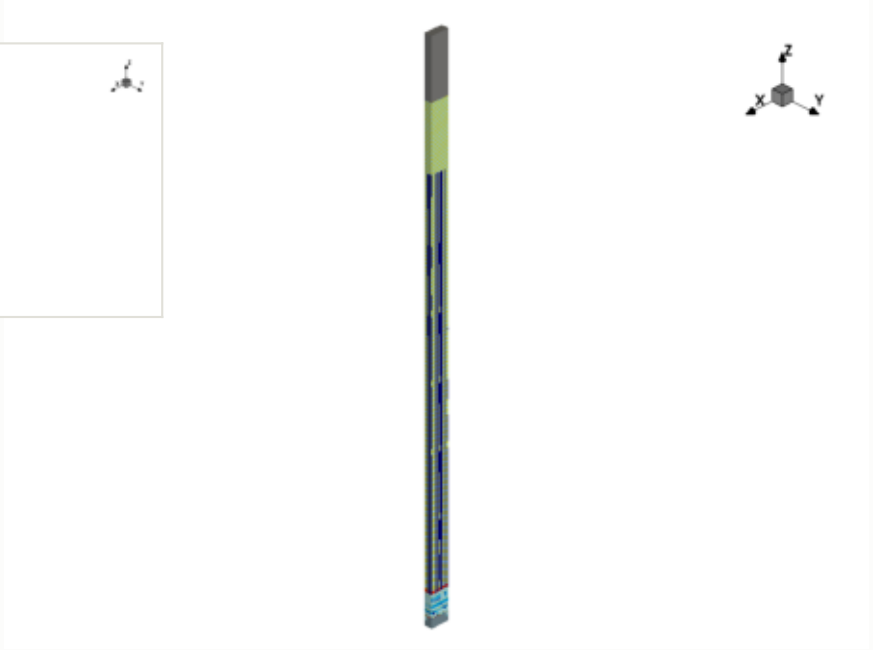

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

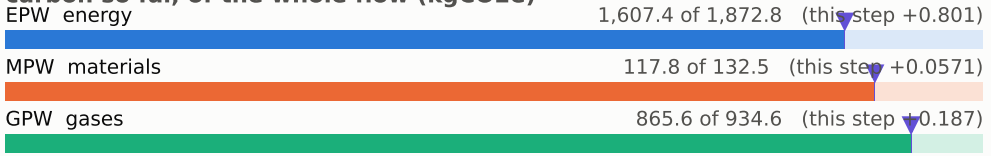

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

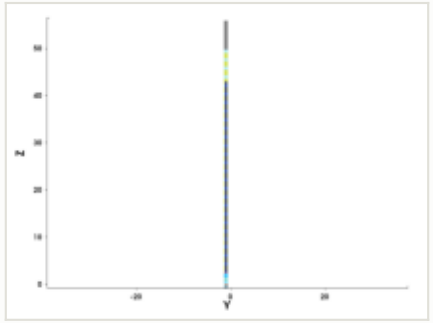

y cut at -1.035 µm

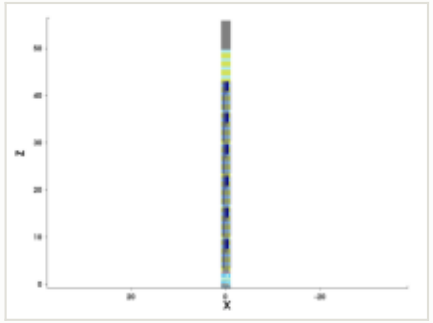

mask for this step

no mask for this step

steps by process area

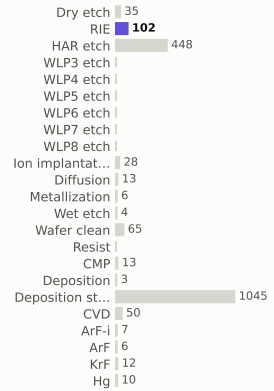

materials deposited (g)

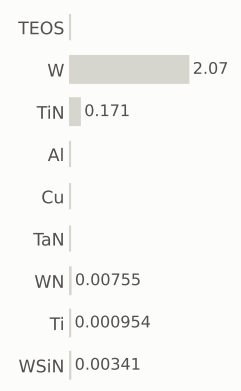

gases emitted (g)

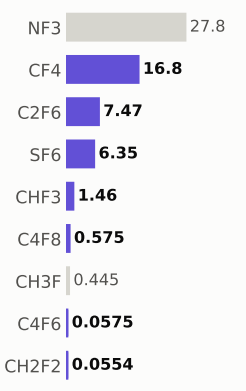

Step #24620: RIE

etch_anisotropic · RIE

1.04	2,591.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

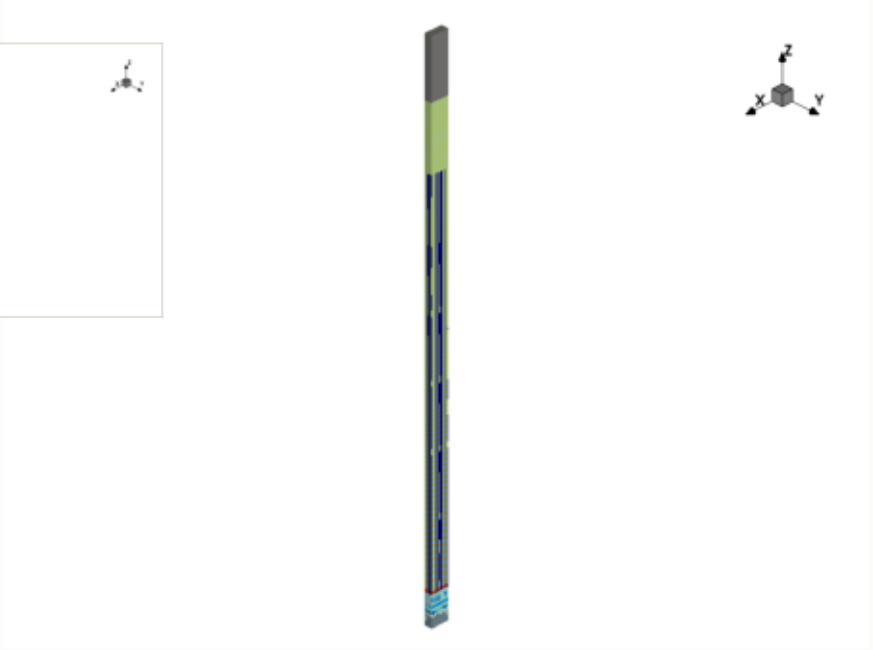

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

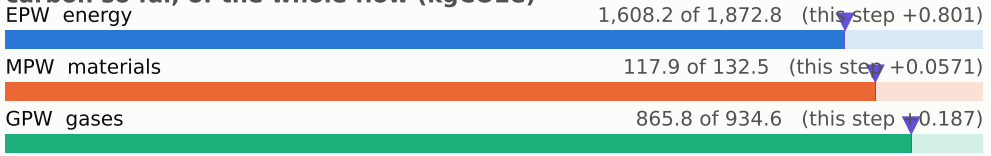

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

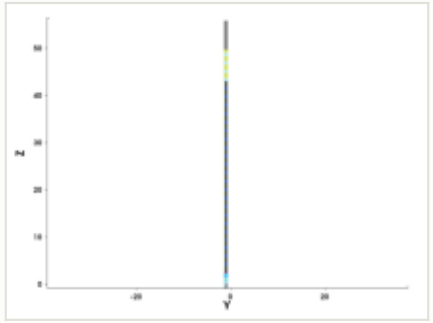

y cut at -1.035 µm

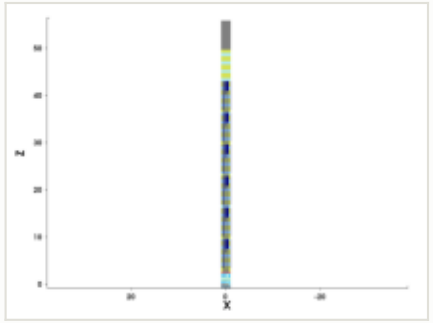

mask for this step

no mask for this step

steps by process area

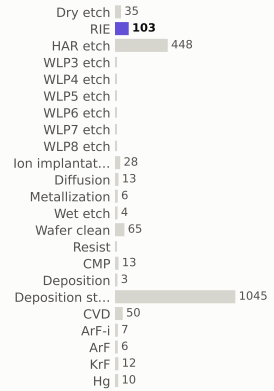

materials deposited (g)

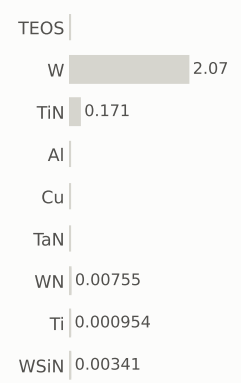

gases emitted (g)

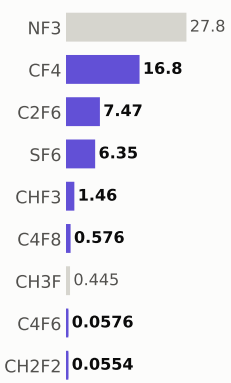

Step #24630: RIE

etch_anisotropic · RIE

1.04	2,592.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

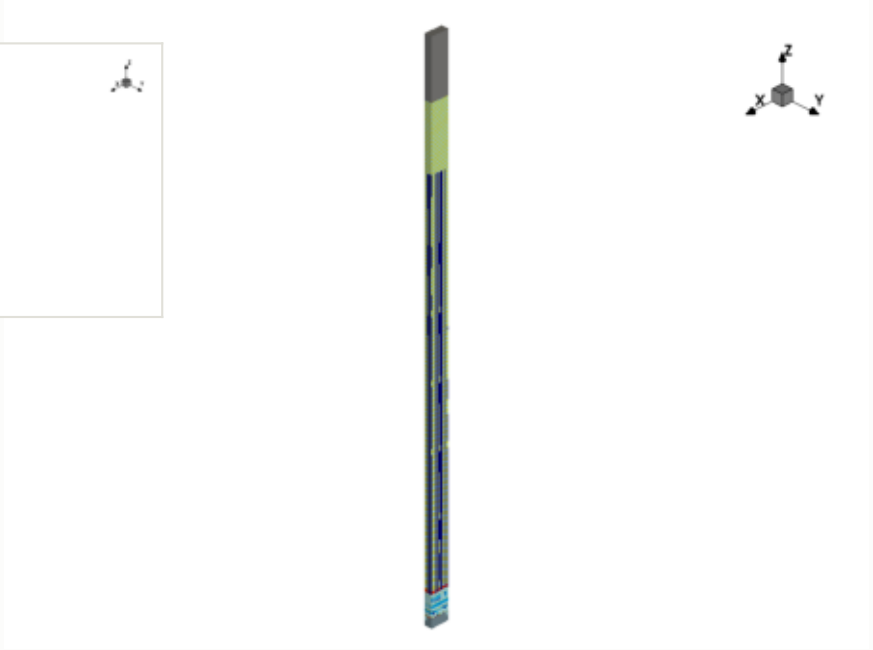

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

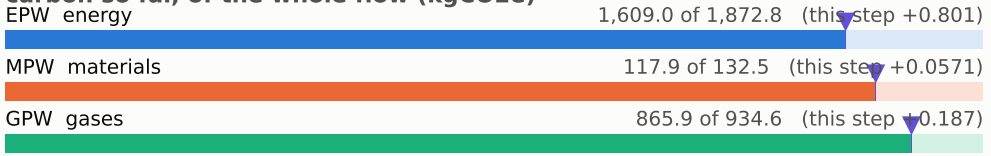

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

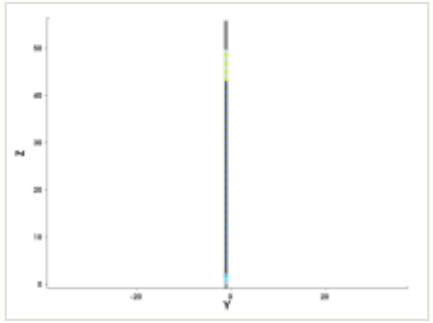

y cut at -1.035 µm

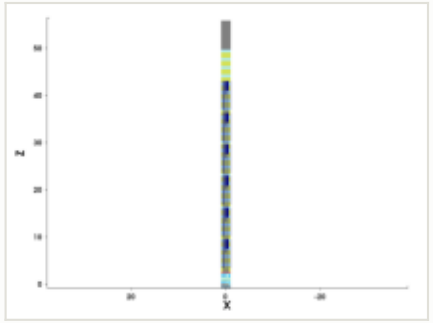

mask for this step

no mask for this step

steps by process area

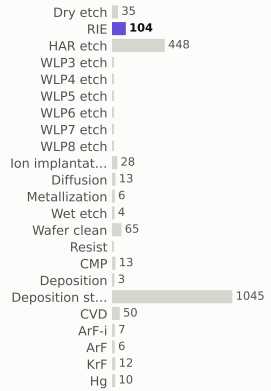

materials deposited (g)

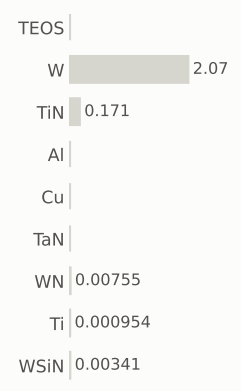

gases emitted (g)

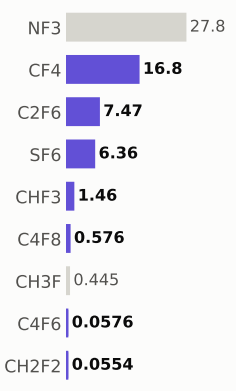

Step #24640: RIE

etch_anisotropic · RIE

1.04	2,593.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

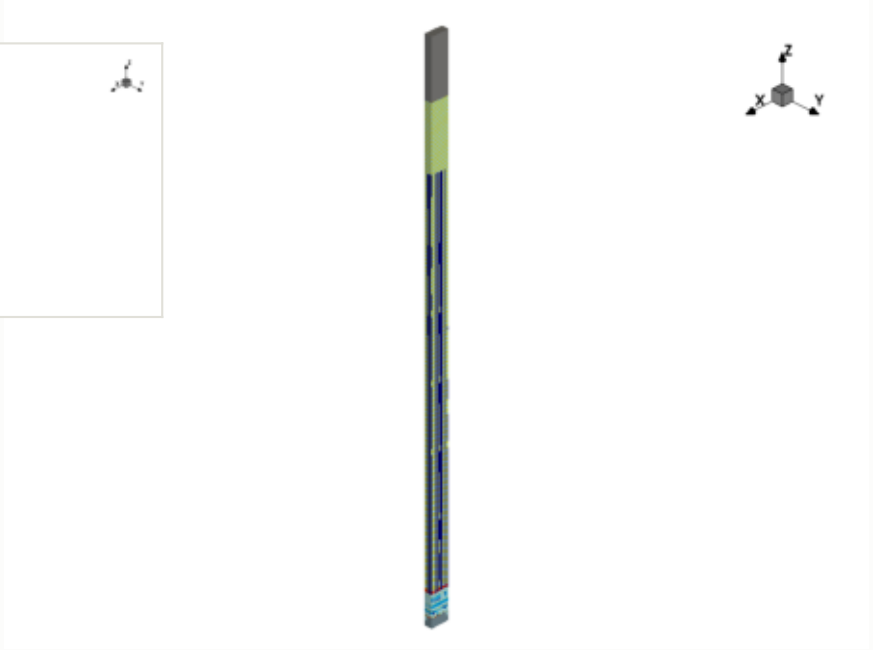

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

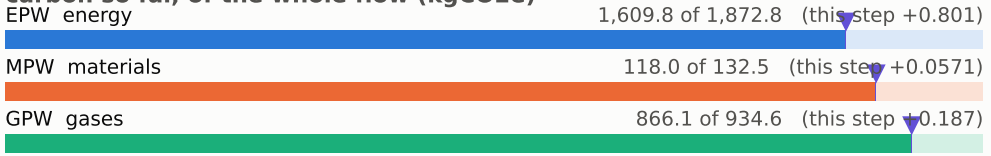

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

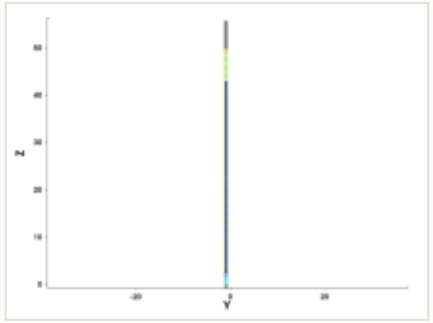

y cut at -1.035 µm

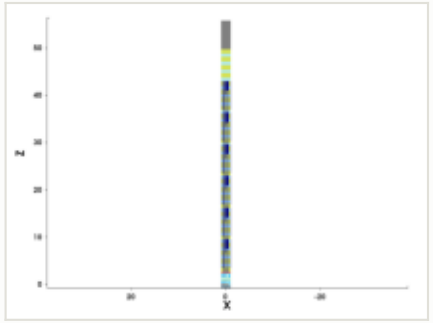

mask for this step

no mask for this step

steps by process area

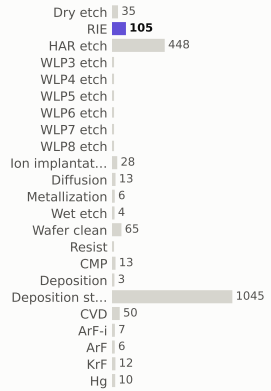

materials deposited (g)

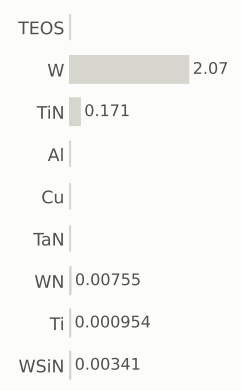

gases emitted (g)

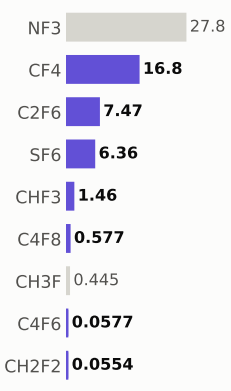

Step #24650: Dry_etch

etch_strip · Dry_etch

0.801	2,594.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

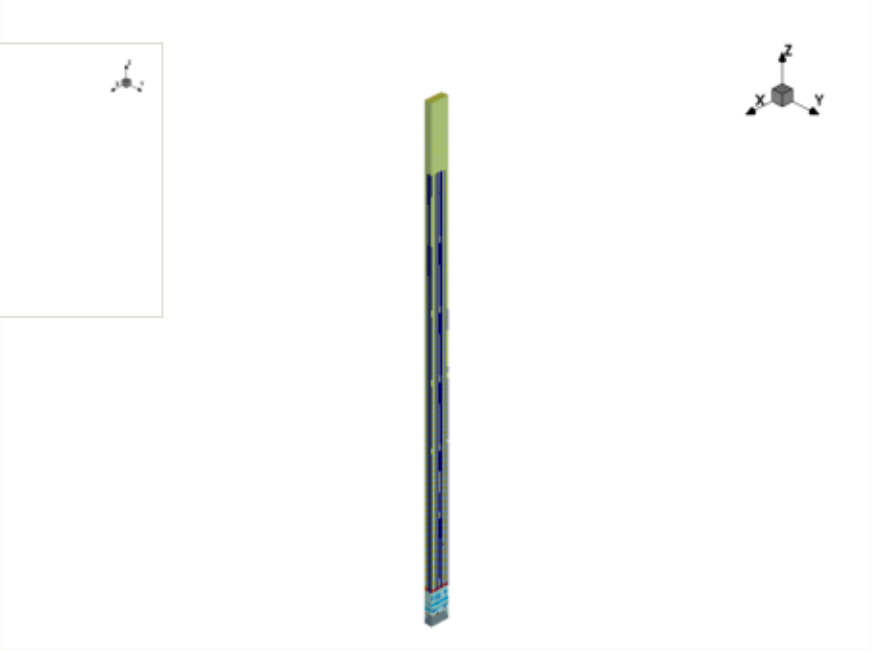

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

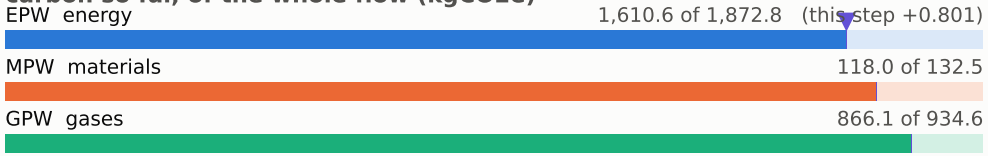

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

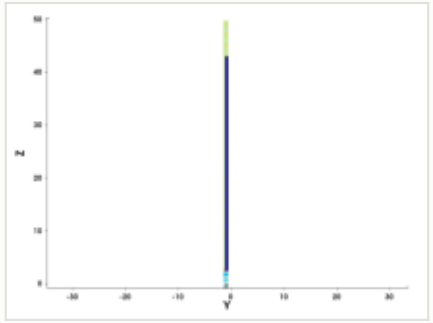

y cut at -1.035 µm

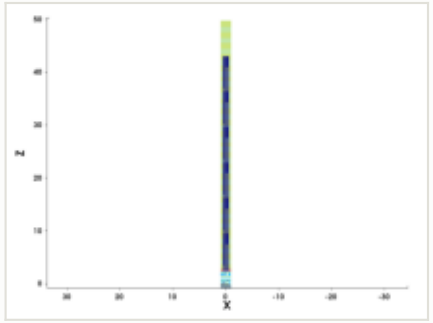

mask for this step

no mask for this step

steps by process area

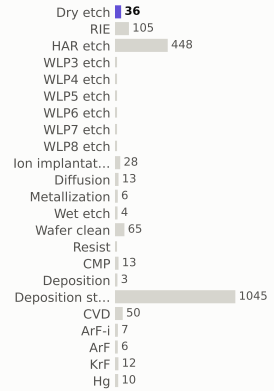

materials deposited (g)

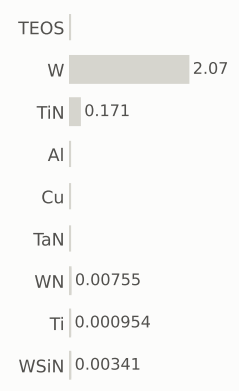

gases emitted (g)

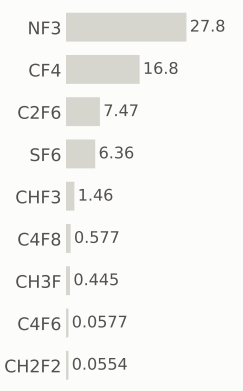

Step #24660: Wafer_clean

clean · Wafer_clean

0.169	2,594.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

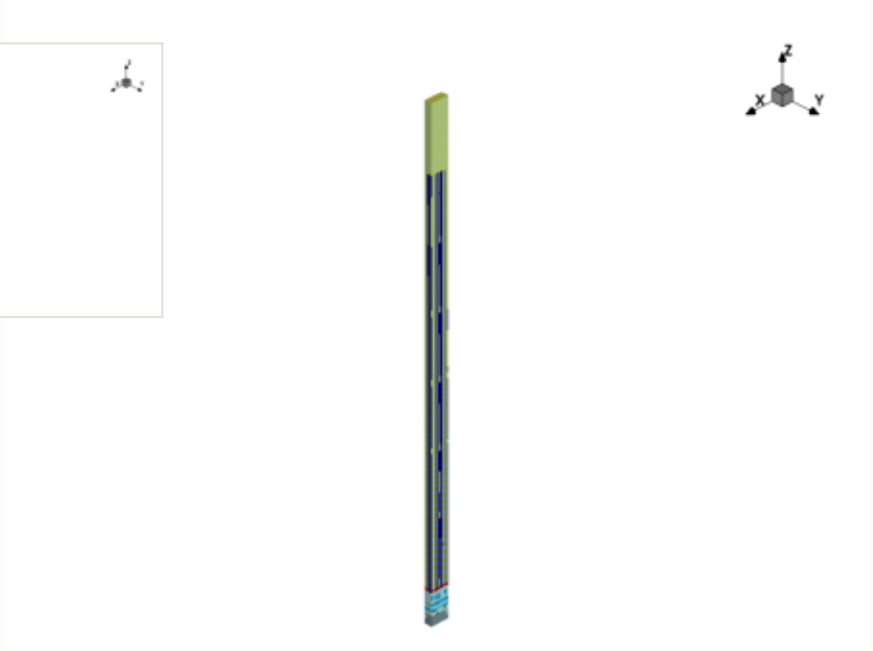

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

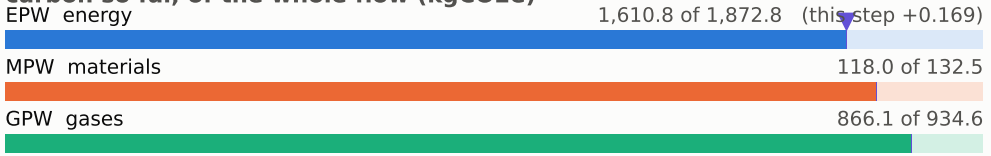

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

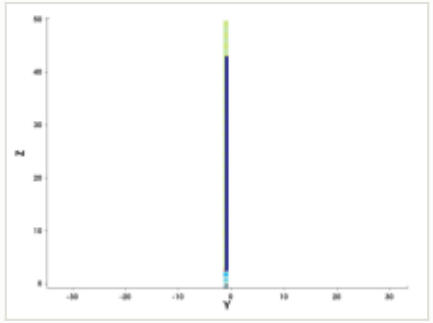

y cut at -1.035 µm

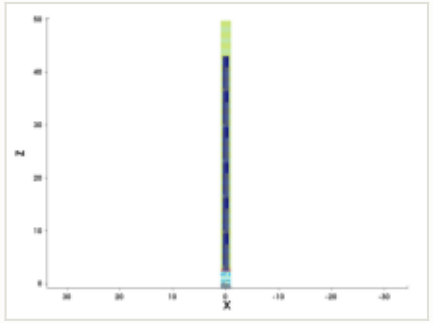

mask for this step

no mask for this step

steps by process area

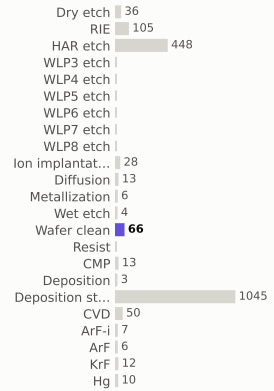

materials deposited (g)

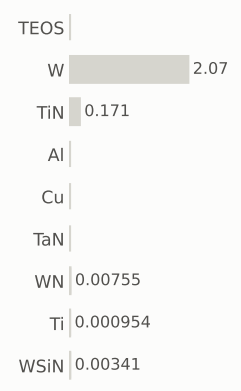

gases emitted (g)

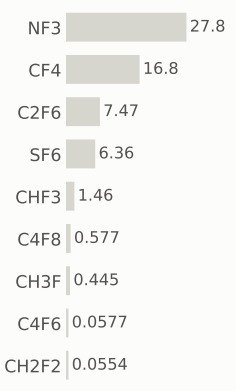

Step #24670: KrF

litho_patterning · KrF

0.199	2,595.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

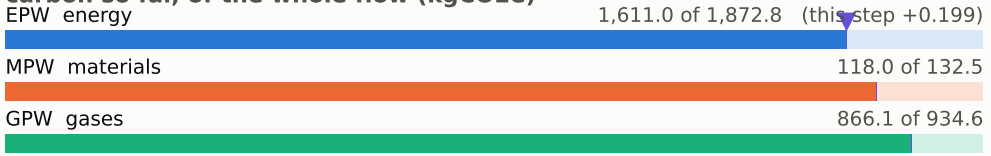

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

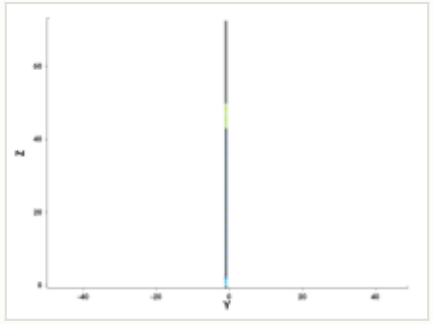

y cut at -1.035 µm

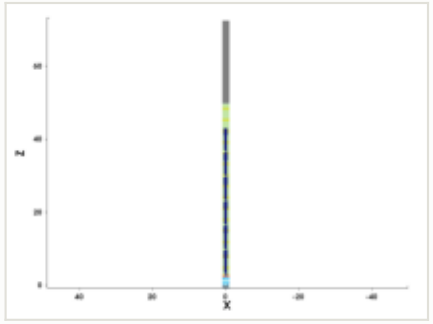

mask: layer 31:0, positive (OASIS)

steps by process area

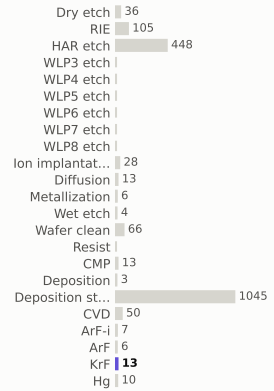

materials deposited (g)

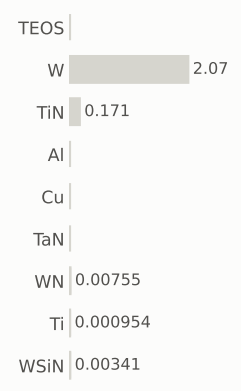

gases emitted (g)

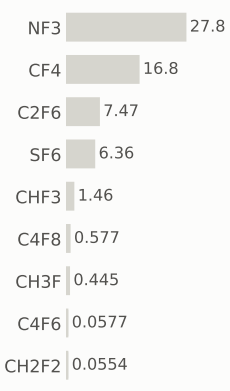

Step #24680: WLP3_etch

etch_anisotropic · WLP3_etch

4.19	2,599.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	WLP3_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

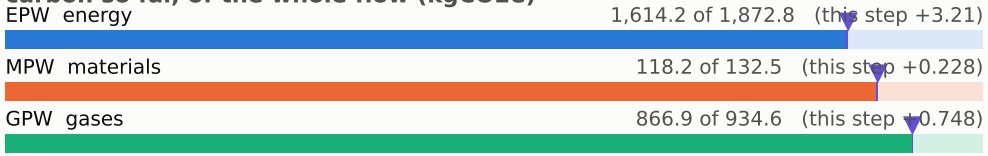

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

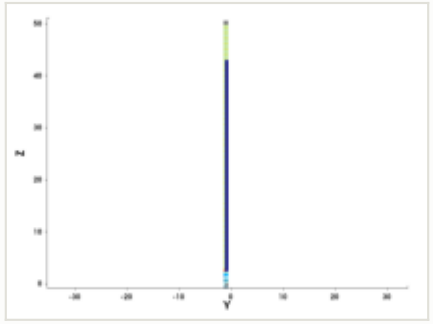

y cut at -1.035 µm

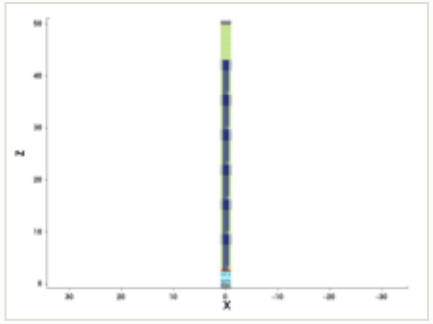

mask for this step

no mask for this step

steps by process area

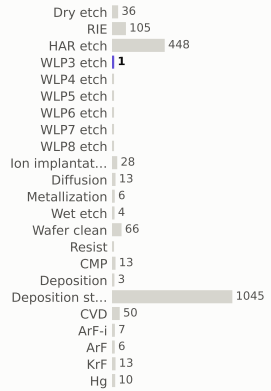

materials deposited (g)

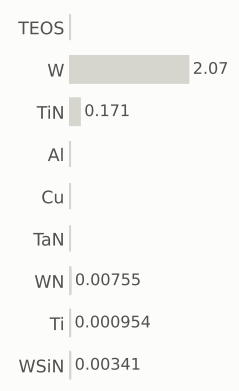

gases emitted (g)

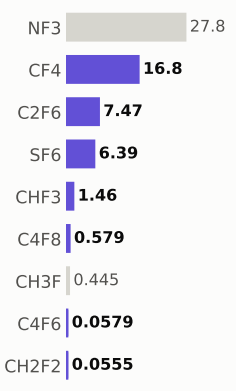

Step #24690: WLP3_etch

etch_anisotropic · WLP3_etch

4.19	2,603.4	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP3_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

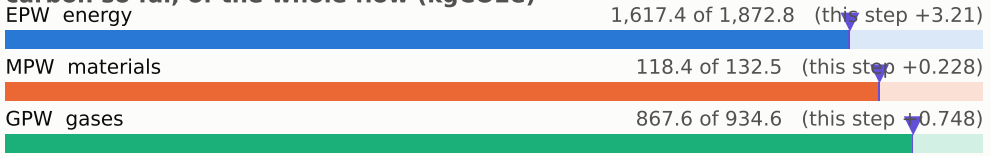

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

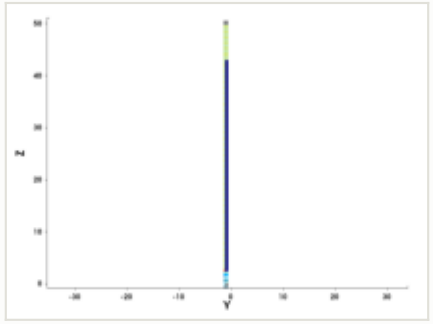

y cut at -1.035 µm

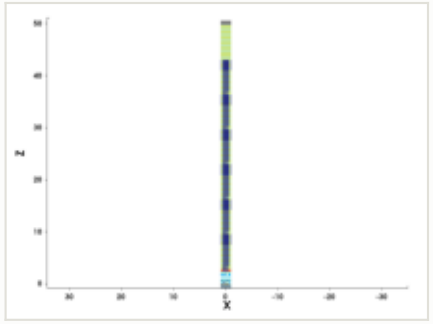

mask for this step

no mask for this step

steps by process area

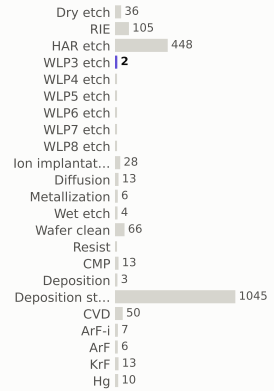

materials deposited (g)

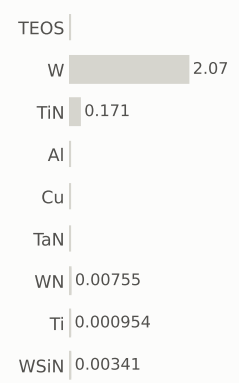

gases emitted (g)

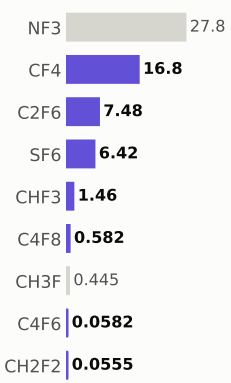

Step #24700: Dry_etch

etch_strip · Dry_etch

0.801	2,604.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

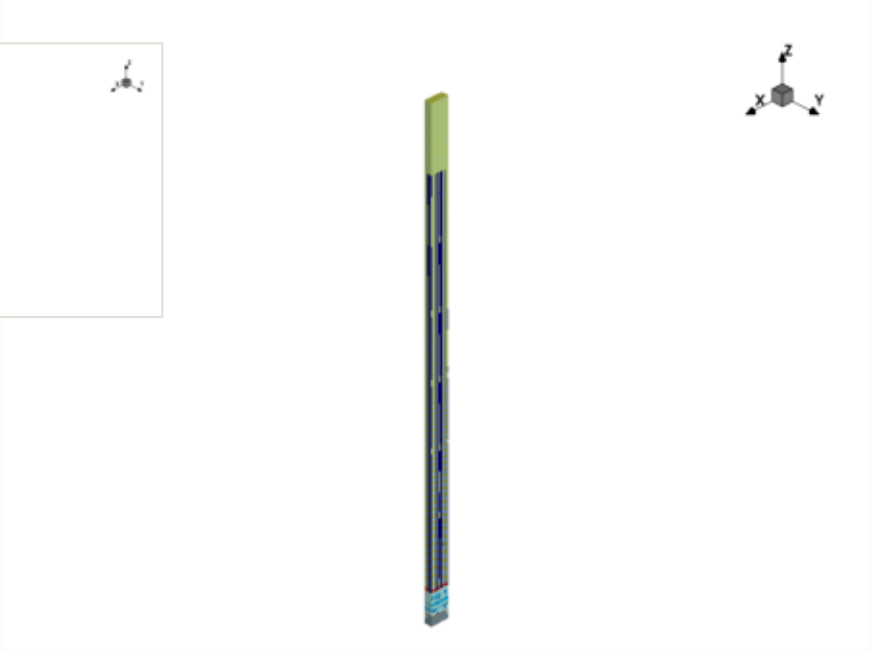

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

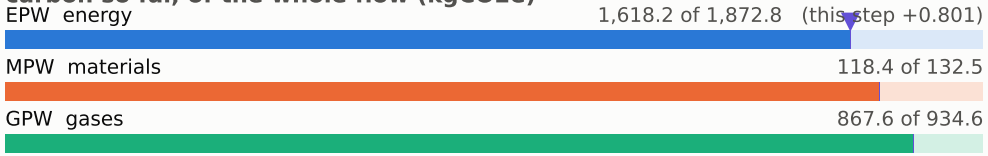

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

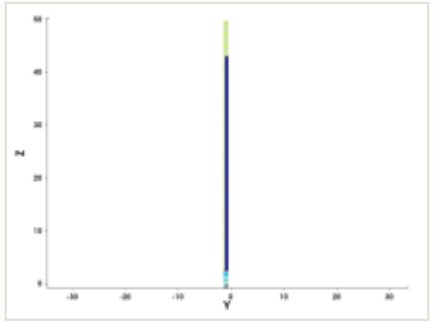

y cut at -1.035 µm

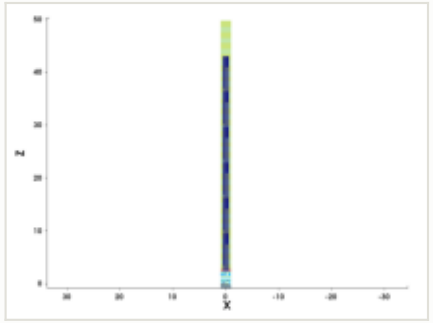

mask for this step

no mask for this step

steps by process area

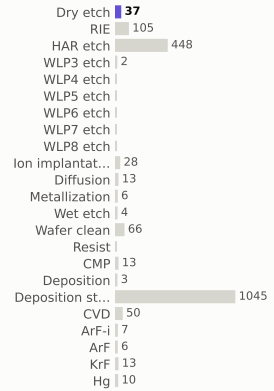

materials deposited (g)

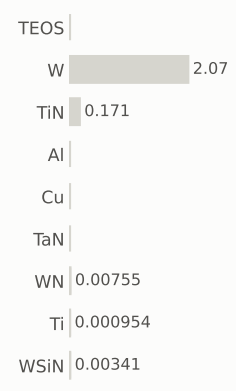

gases emitted (g)

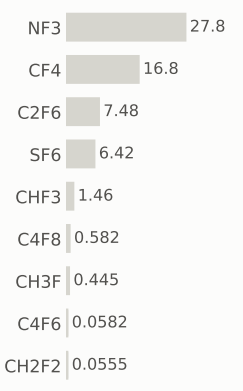

Step #24710: Wafer_clean

clean · Wafer_clean

0.169	2,604.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

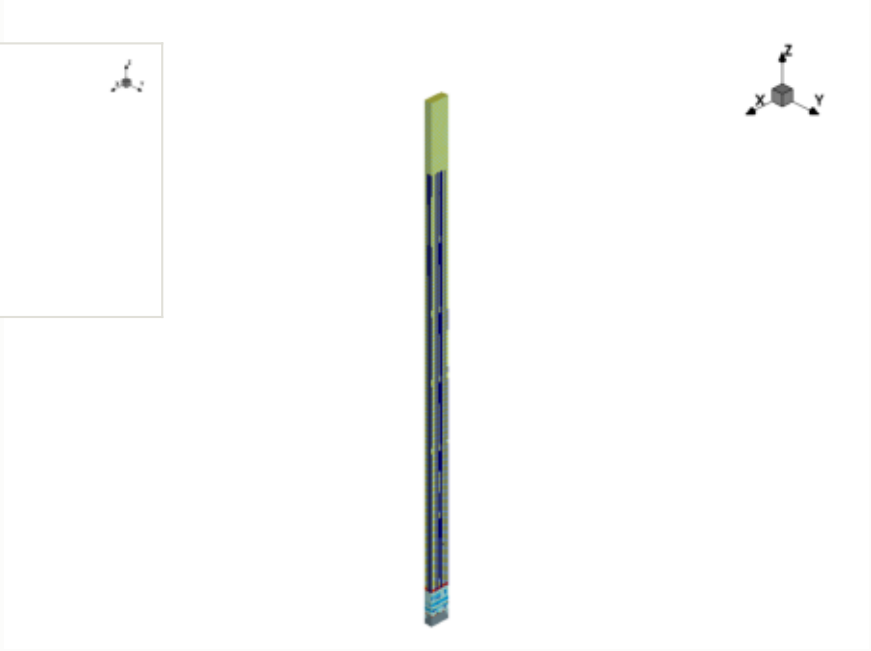

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

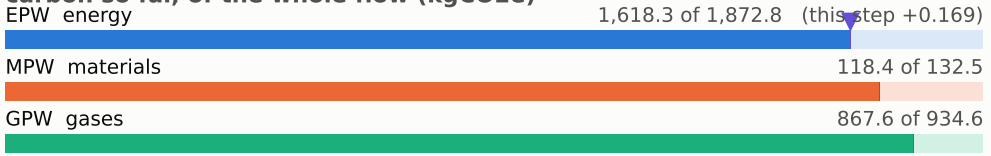

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

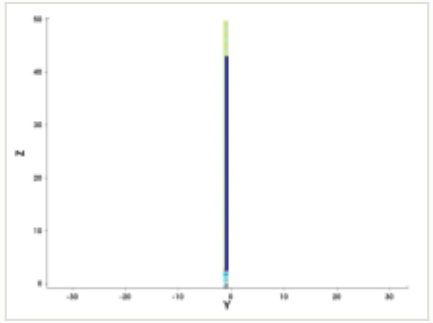

y cut at -1.035 µm

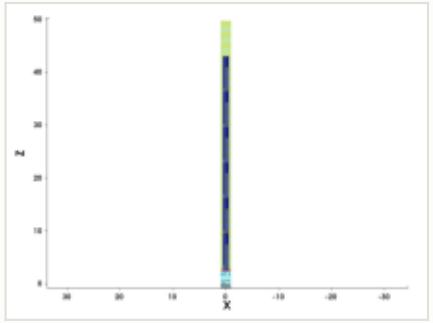

mask for this step

no mask for this step

steps by process area

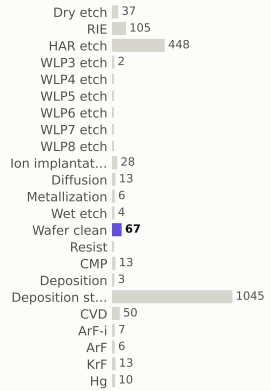

materials deposited (g)

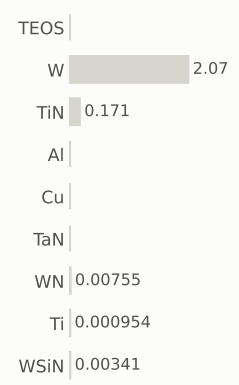

gases emitted (g)

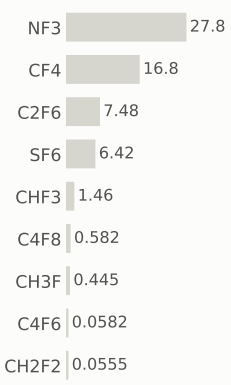

Step #24720: KrF

litho_patterning · KrF

0.199	2,604.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

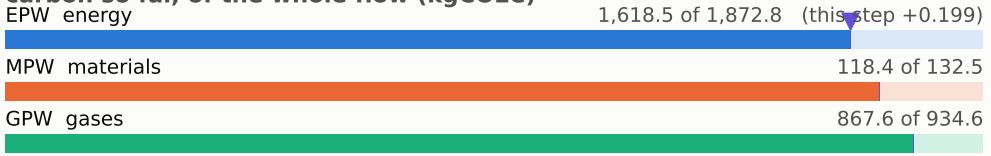

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

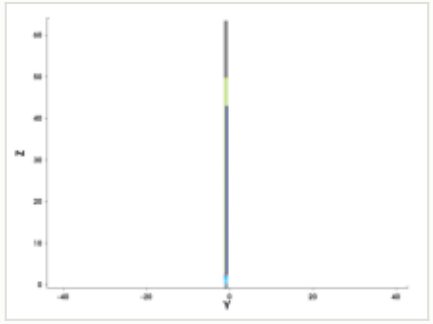

y cut at -1.035 µm

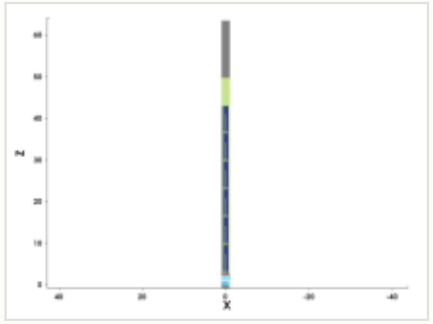

mask: layer 49:0, positive (OASIS)

steps by process area

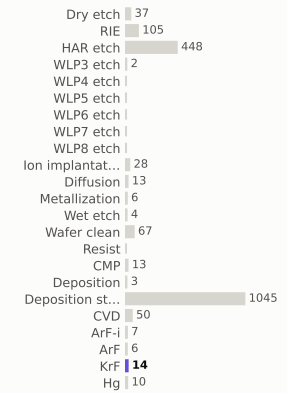

materials deposited (g)

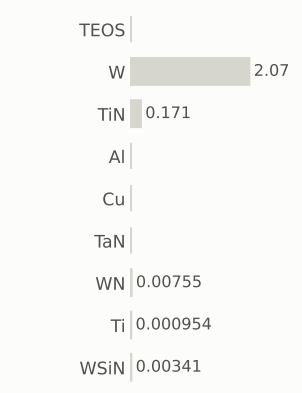

gases emitted (g)

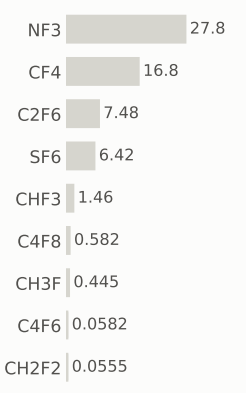

Step #24730: WLP8_etch

etch_anisotropic · WLP8_etch

1.04	2,605.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP8_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

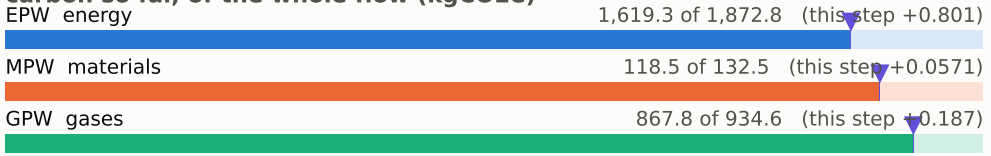

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

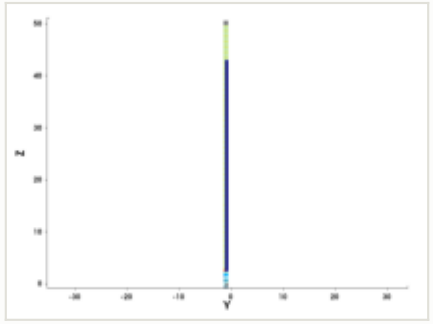

y cut at -1.035 µm

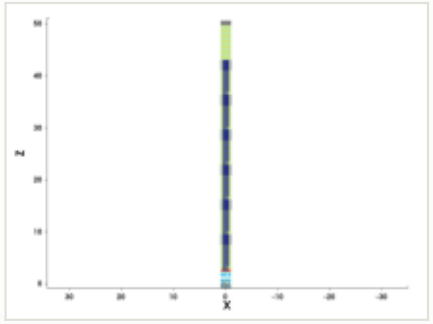

mask for this step

no mask for this step

steps by process area

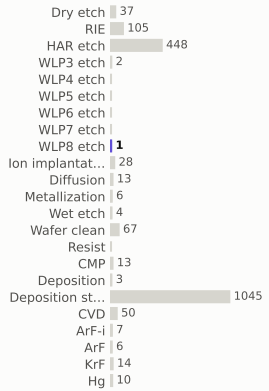

materials deposited (g)

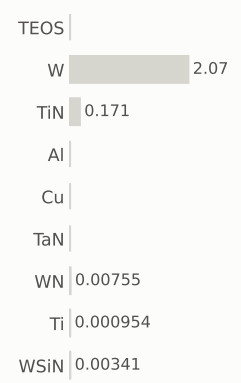

gases emitted (g)

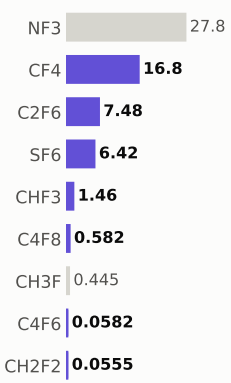

Step #24740: WLP8_etch

etch_anisotropic · WLP8_etch

1.04	2,606.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP8_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

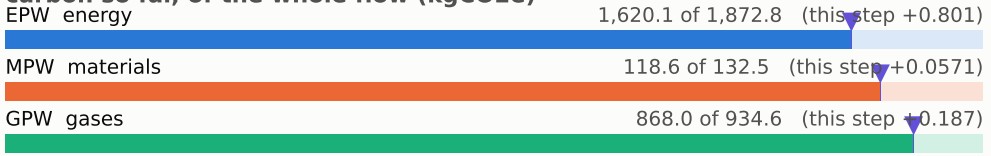

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

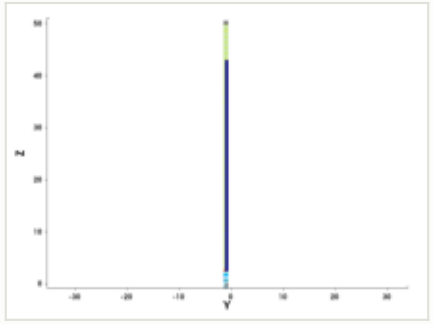

y cut at -1.035 µm

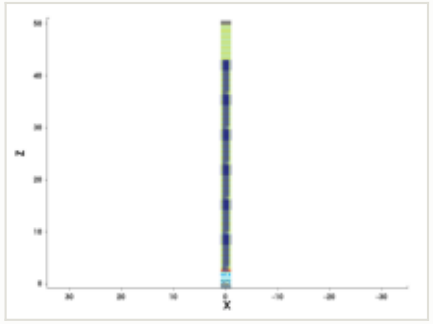

mask for this step

no mask for this step

steps by process area

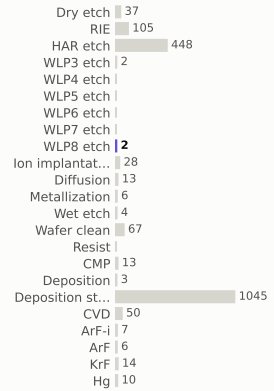

materials deposited (g)

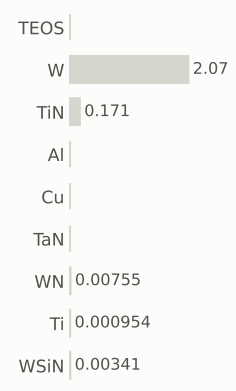

gases emitted (g)

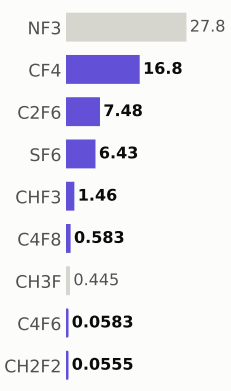

Step #24750: Dry_etch

etch_strip · Dry_etch

0.801	2,607.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

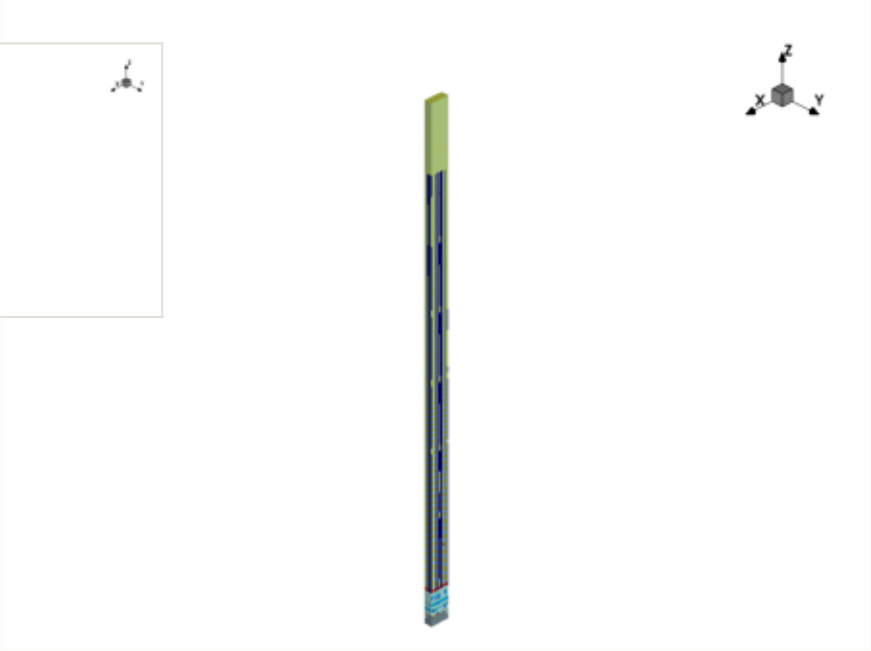

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

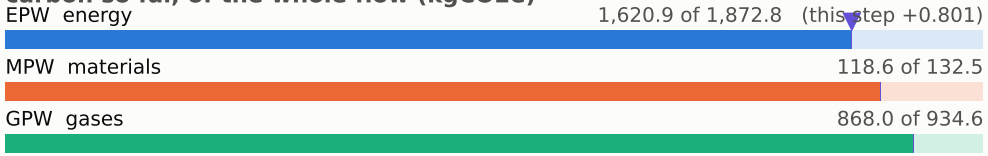

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

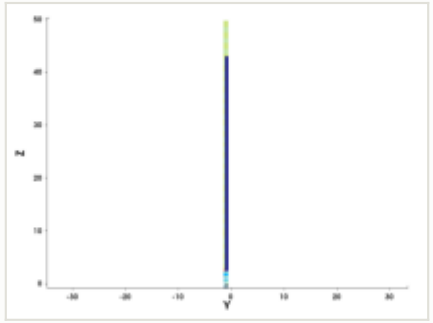

y cut at -1.035 µm

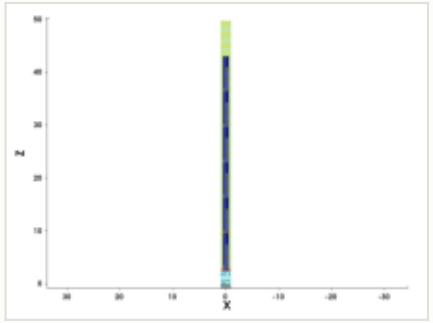

mask for this step

no mask for this step

steps by process area

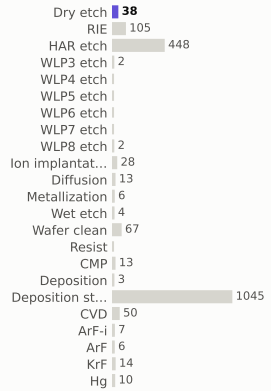

materials deposited (g)

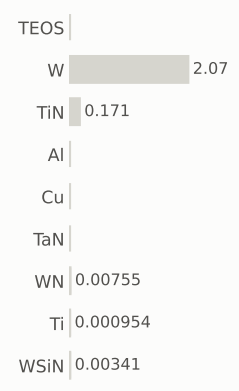

gases emitted (g)

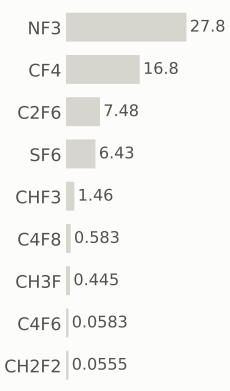

Step #24760: Wafer_clean

clean · Wafer_clean

0.169	2,607.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

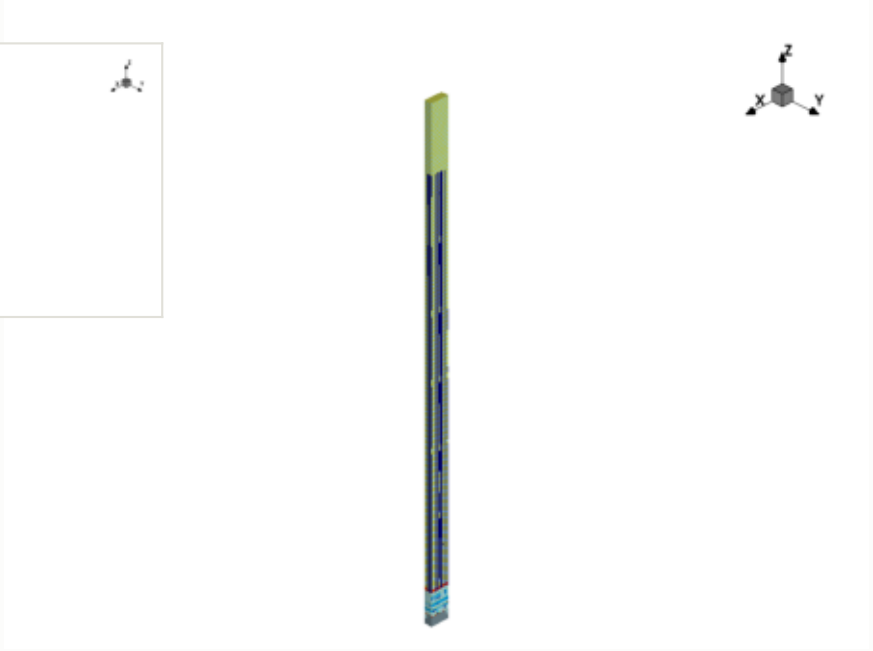

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

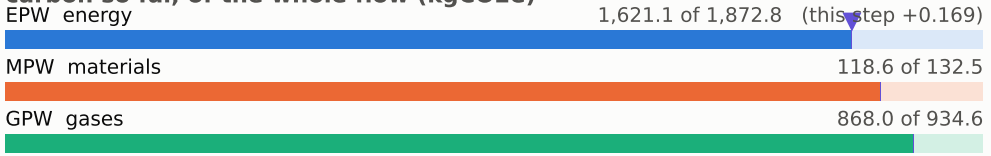

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

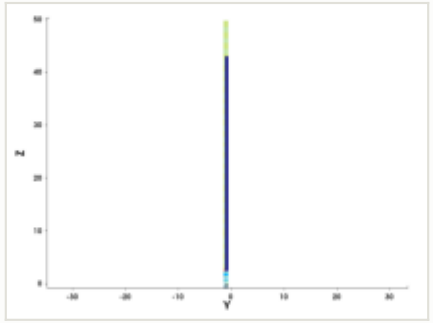

y cut at -1.035 µm

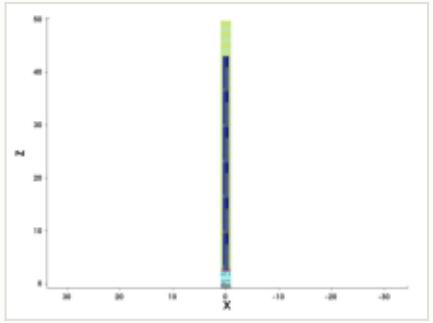

mask for this step

no mask for this step

steps by process area

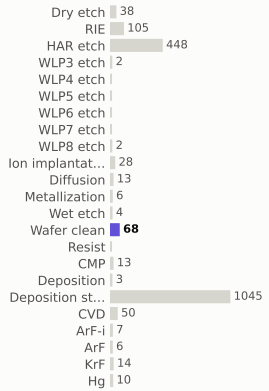

materials deposited (g)

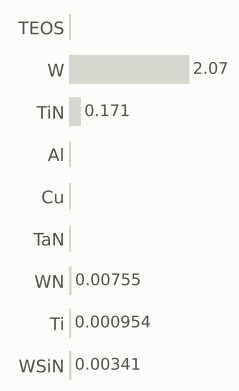

gases emitted (g)

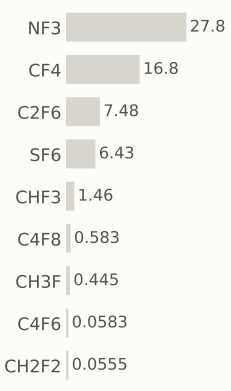

Step #24770: KrF

litho_patterning · KrF

0.199	2,607.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

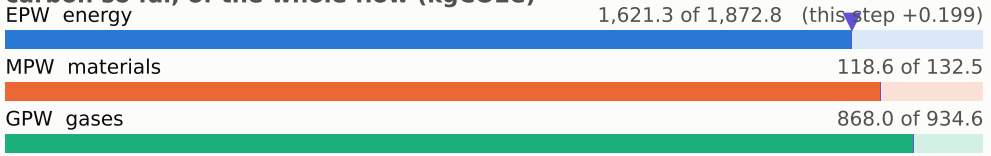

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

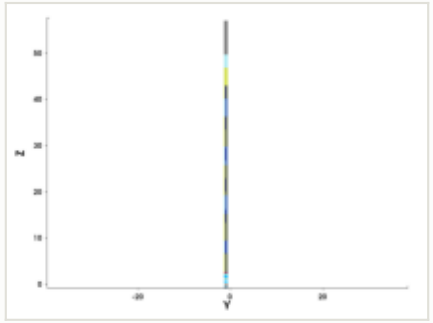

y cut at -1.035 µm

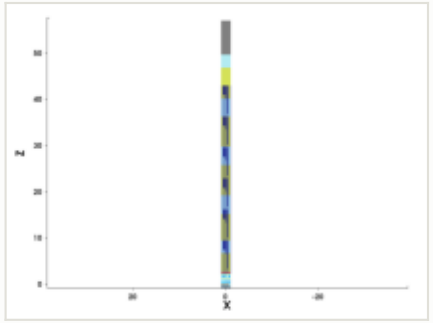

mask: layer 48:0, positive (OASIS)

steps by process area

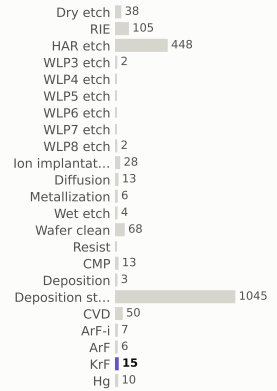

materials deposited (g)

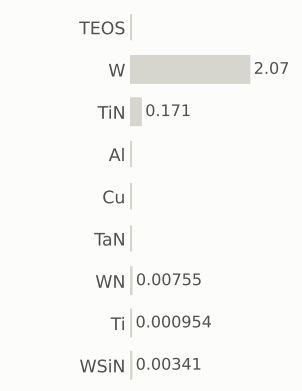

gases emitted (g)

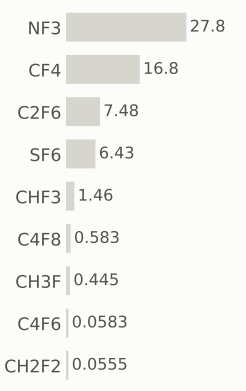

Step #24780: WLP7_etch

etch_anisotropic · WLP7_etch

1.04	2,608.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP7_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

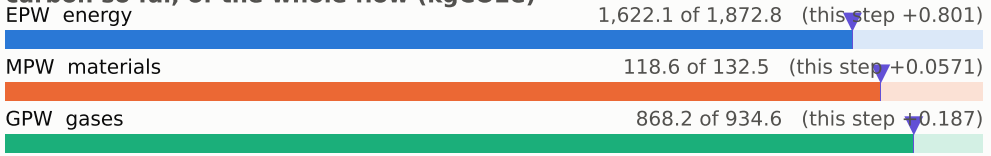

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

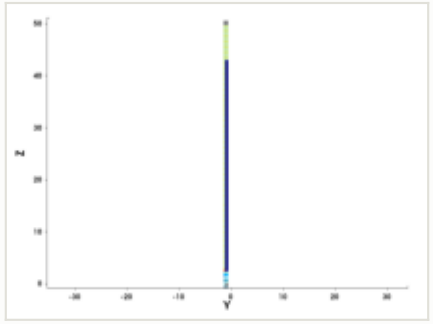

y cut at -1.035 µm

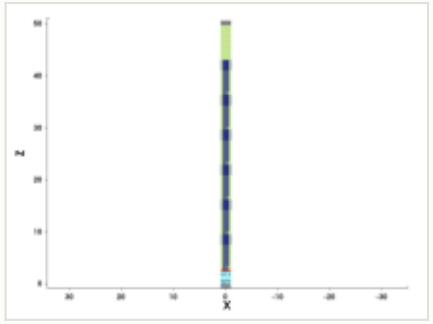

mask for this step

no mask for this step

steps by process area

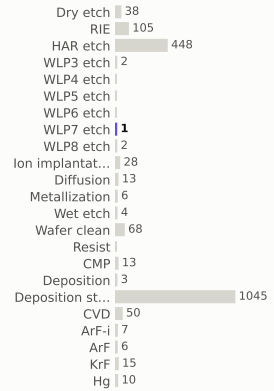

materials deposited (g)

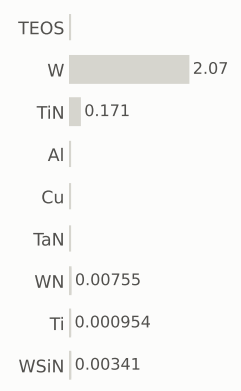

gases emitted (g)

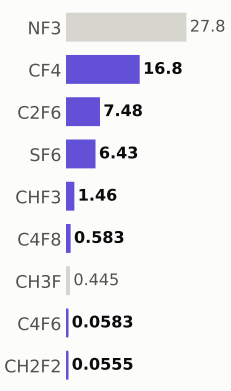

Step #24790: WLP7_etch

etch_anisotropic · WLP7_etch

1.04	2,610.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP7_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

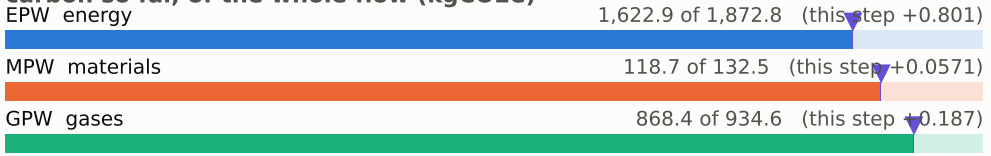

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

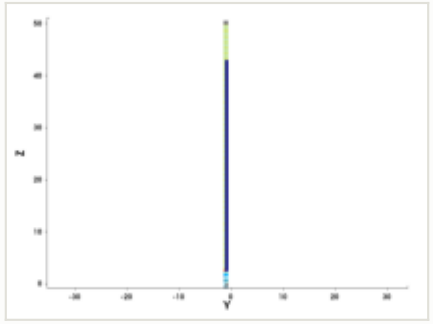

y cut at -1.035 µm

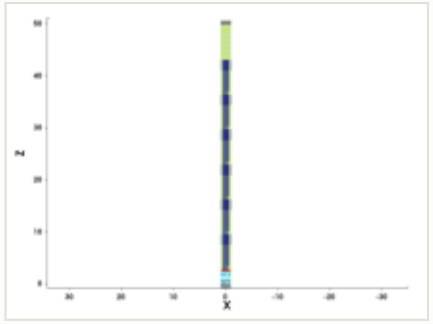

mask for this step

no mask for this step

steps by process area

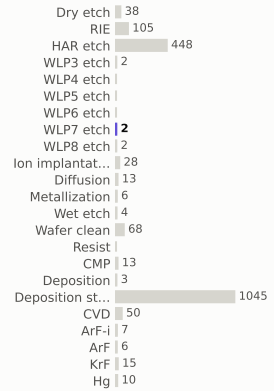

materials deposited (g)

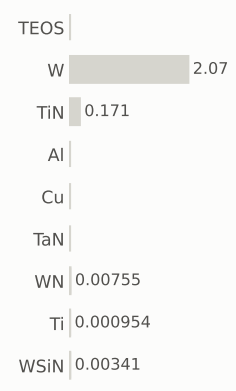

gases emitted (g)

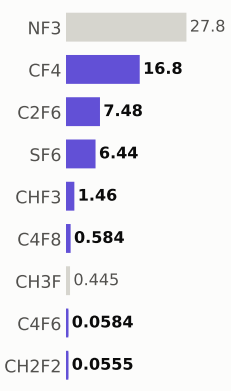

Step #24800: Dry_etch

etch_strip · Dry_etch

0.801	2,610.8	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

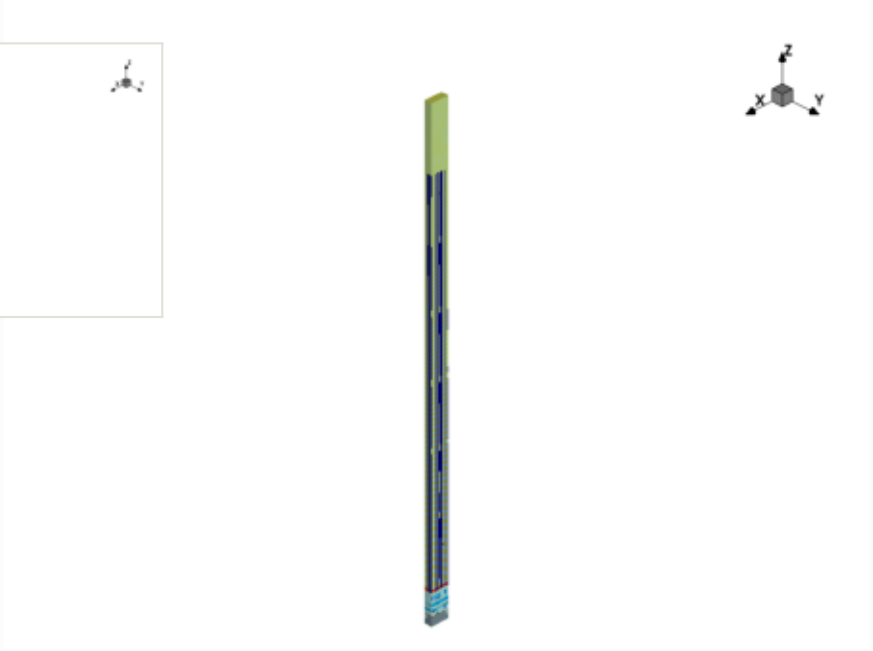

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

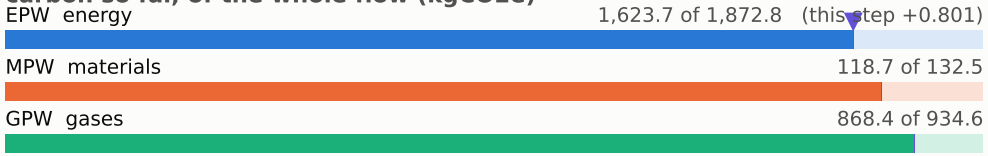

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

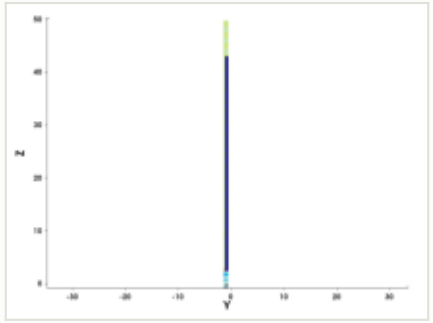

y cut at -1.035 µm

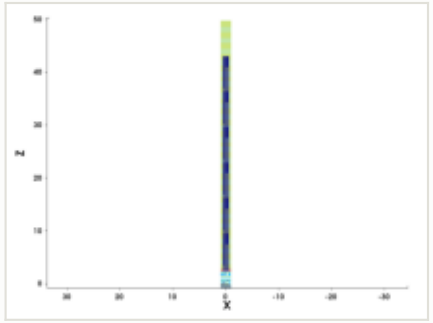

mask for this step

no mask for this step

steps by process area

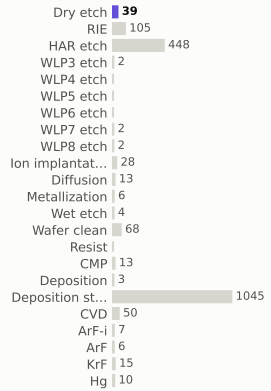

materials deposited (g)

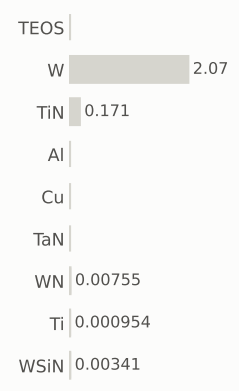

gases emitted (g)

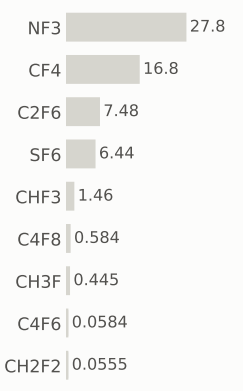

Step #24810: Wafer_clean

clean · Wafer_clean

0.169	2,610.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

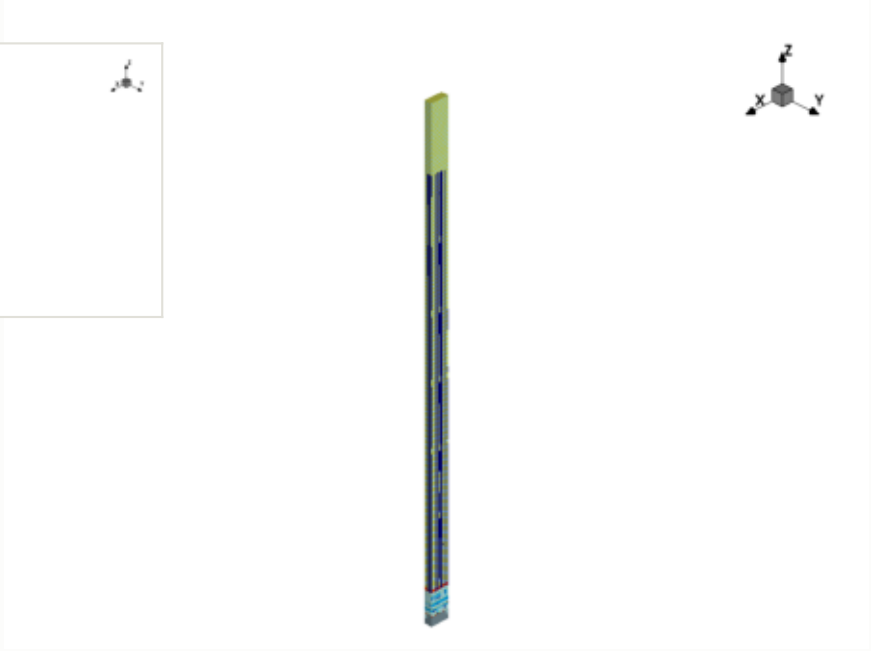

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

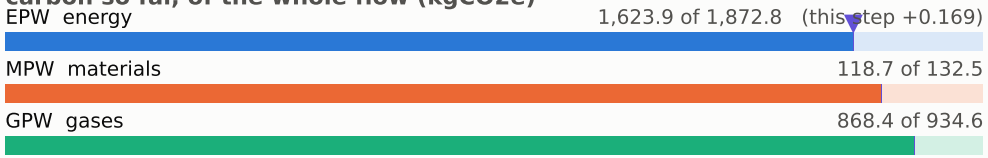

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

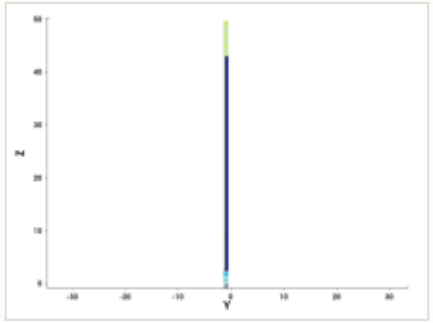

y cut at -1.035 µm

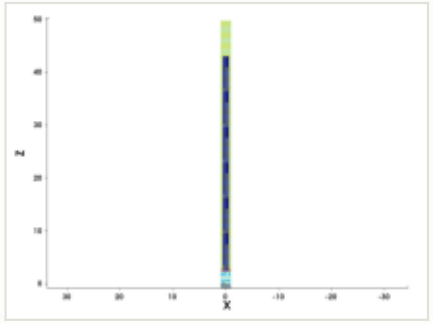

mask for this step

no mask for this step

steps by process area

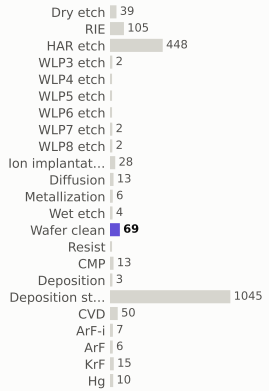

materials deposited (g)

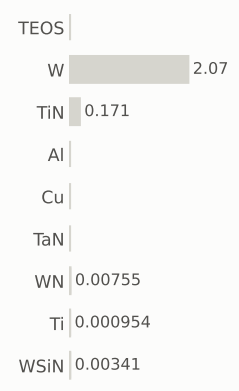

gases emitted (g)

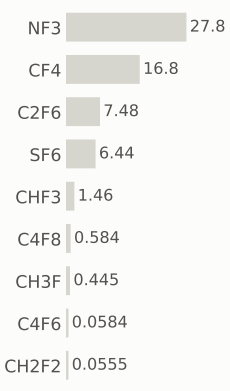

Step #24820: KrF

litho_patterning · KrF

0.199	2,611.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

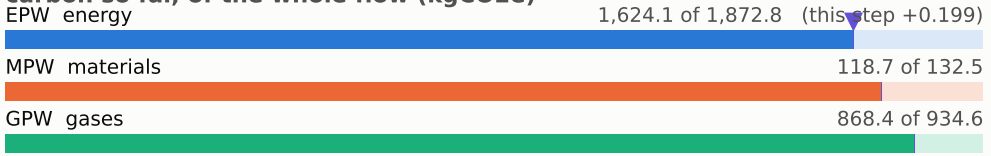

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

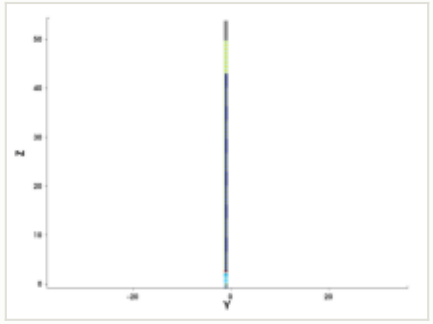

y cut at -1.035 µm

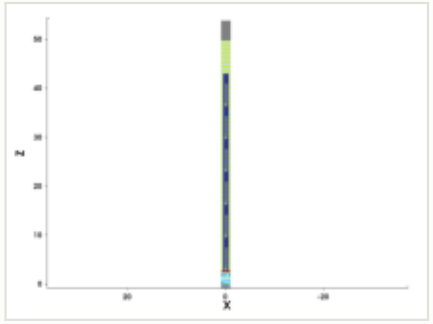

mask: layer 32:0, positive (OASIS)

steps by process area

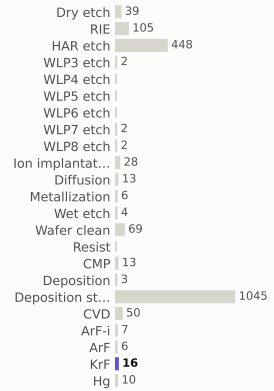

materials deposited (g)

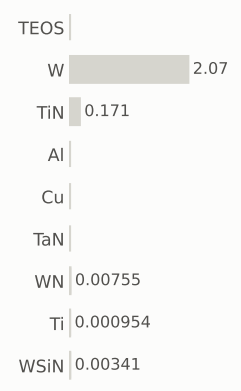

gases emitted (g)

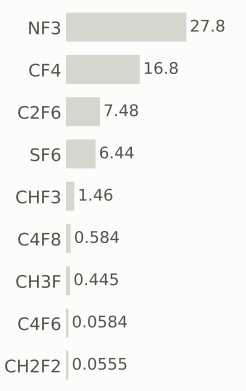

Step #24830: WLP4_etch

etch_anisotropic · WLP4_etch

4.19	2,615.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP4_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

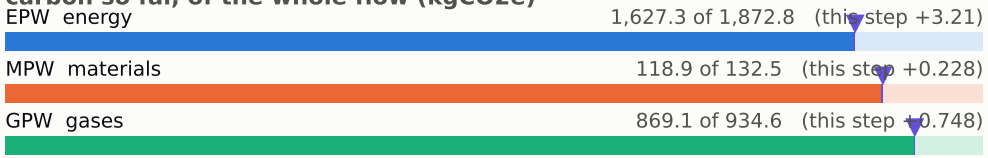

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

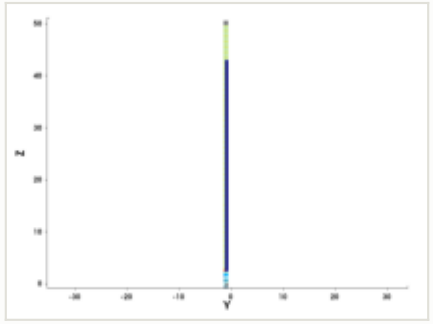

y cut at -1.035 µm

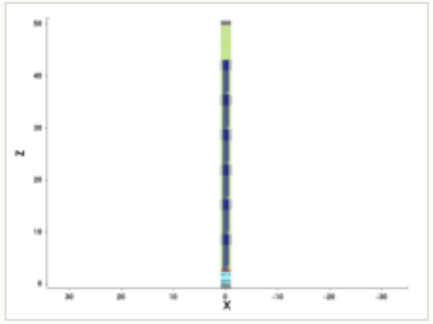

mask for this step

no mask for this step

steps by process area

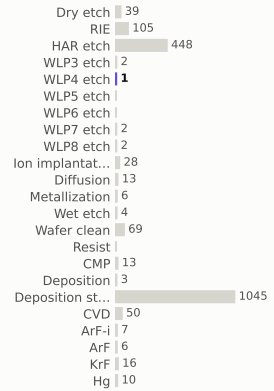

materials deposited (g)

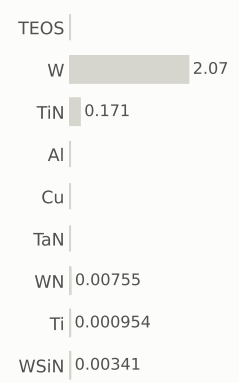

gases emitted (g)

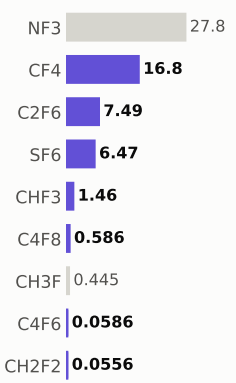

Step #24840: WLP4_etch

etch_anisotropic · WLP4_etch

4.19	2,619.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP4_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

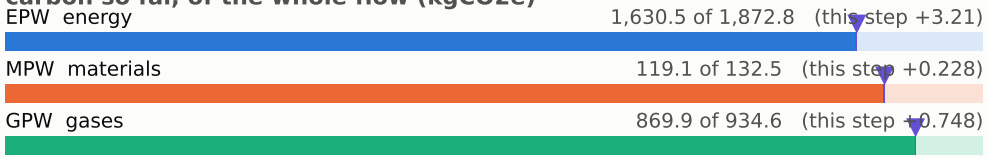

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

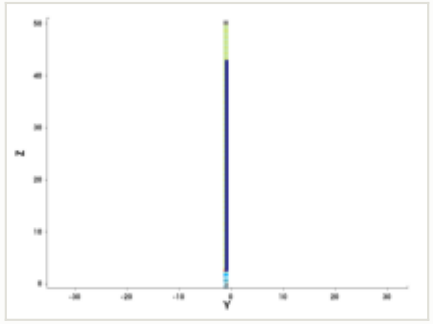

y cut at -1.035 µm

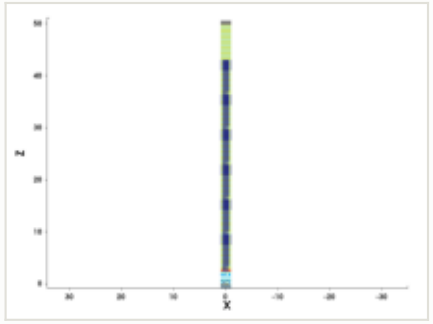

mask for this step

no mask for this step

steps by process area

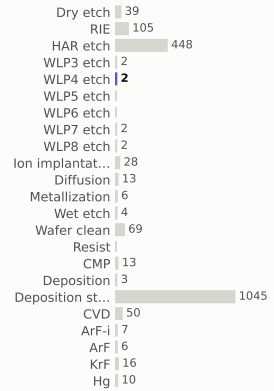

materials deposited (g)

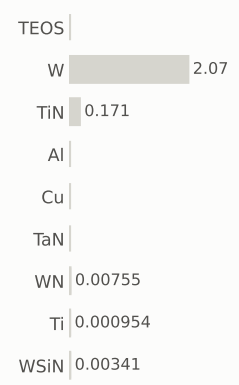

gases emitted (g)

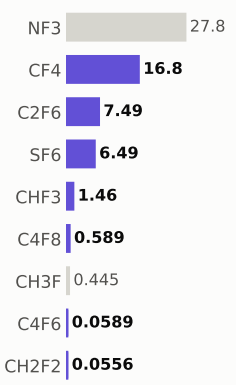

Step #24850: Dry_etch

etch_strip · Dry_etch

0.801	2,620.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

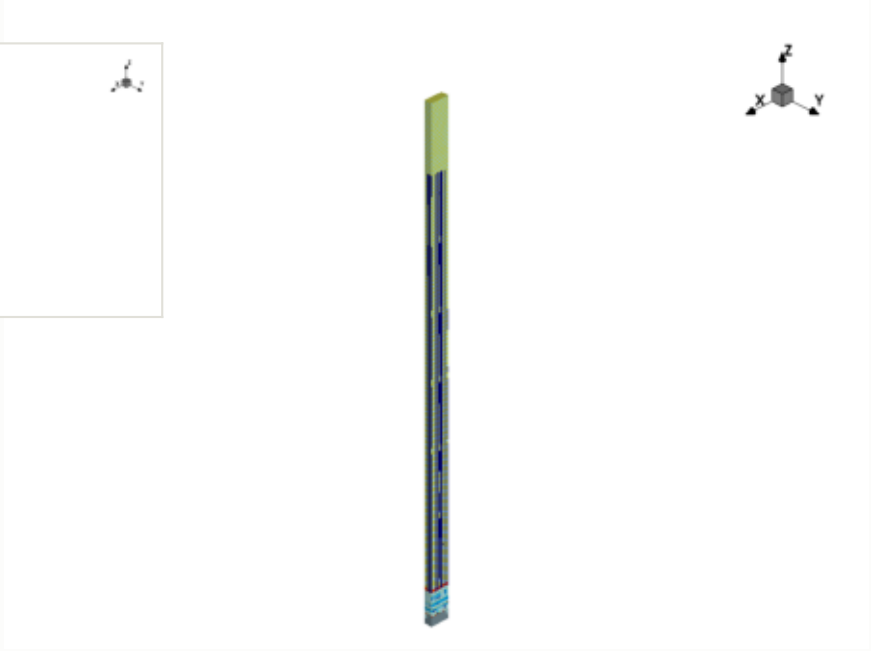

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

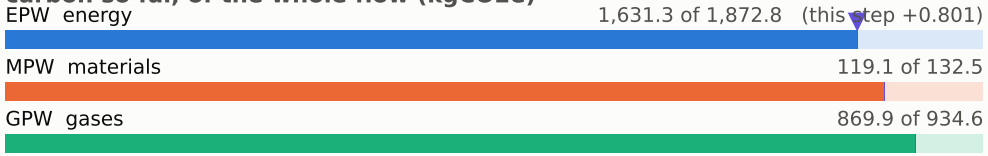

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

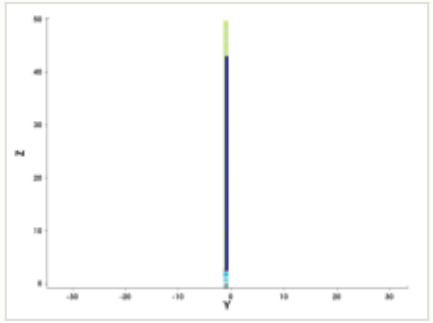

y cut at -1.035 µm

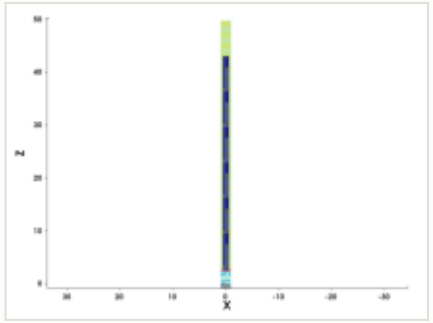

mask for this step

no mask for this step

steps by process area

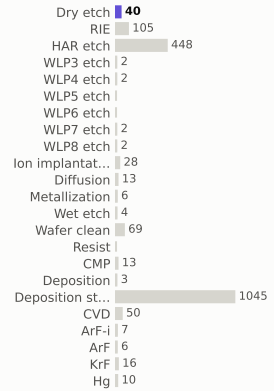

materials deposited (g)

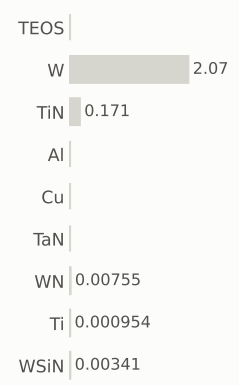

gases emitted (g)



Step #24860: Wafer_clean

clean · Wafer_clean

0.169	2,620.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

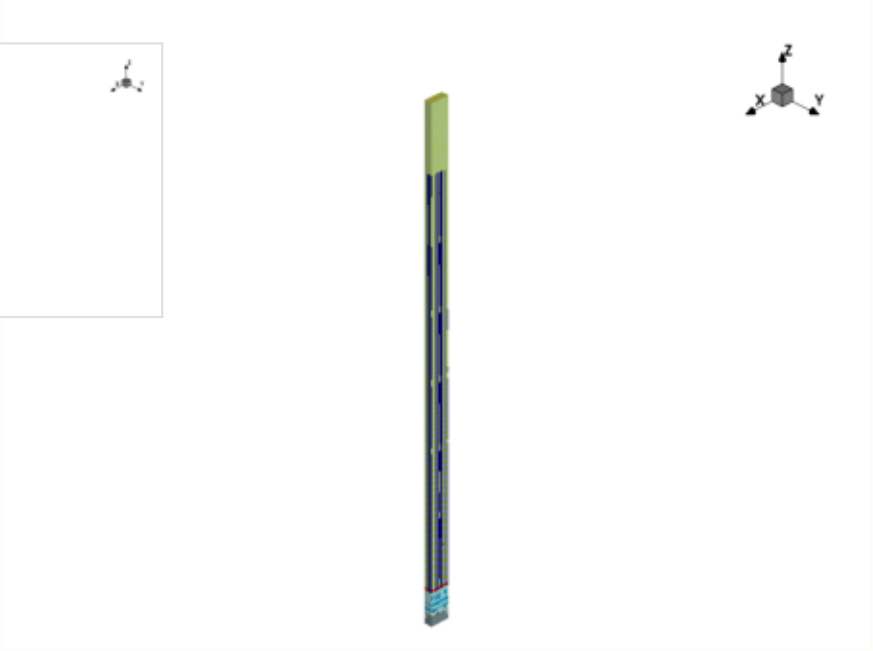

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

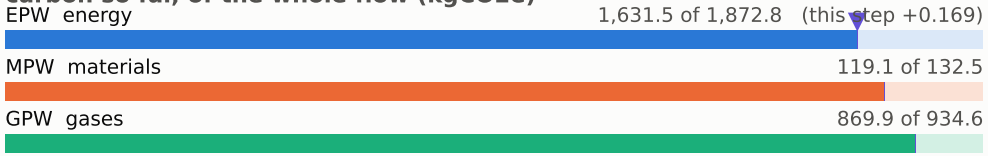

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

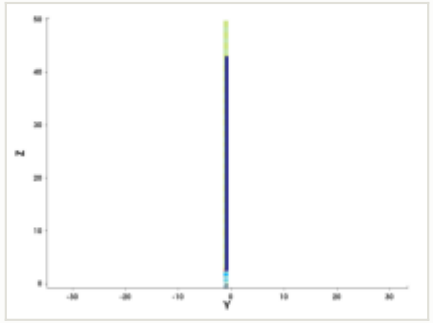

y cut at -1.035 µm

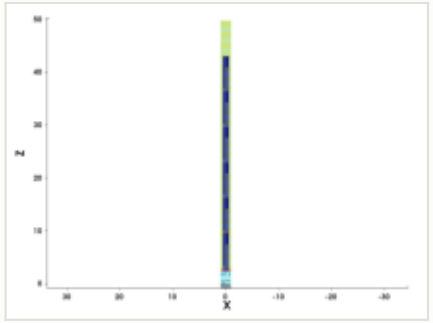

mask for this step

no mask for this step

steps by process area

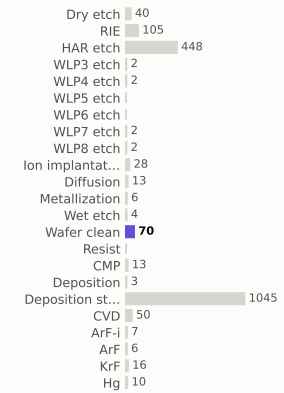

materials deposited (g)



gases emitted (g)

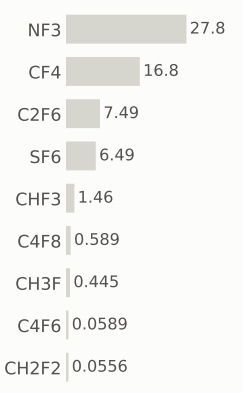

Step #24870: KrF

litho_patterning · KrF

0.199	2,620.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

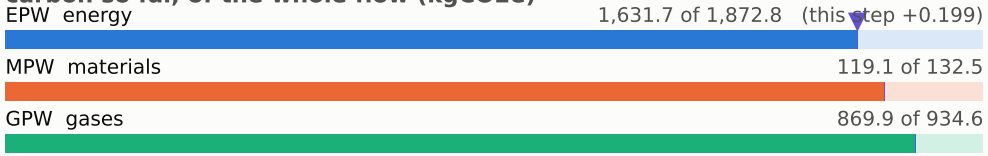

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

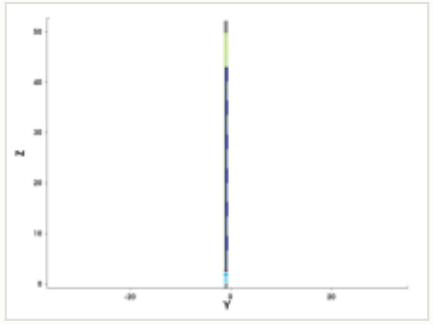

y cut at -1.035 µm

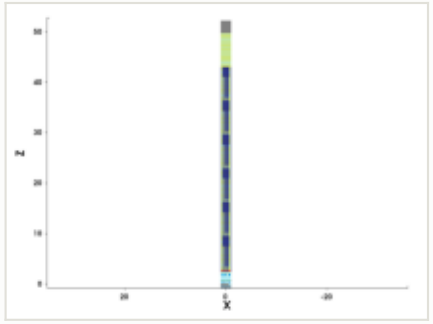

mask: layer 33:0, positive (OASIS)

steps by process area

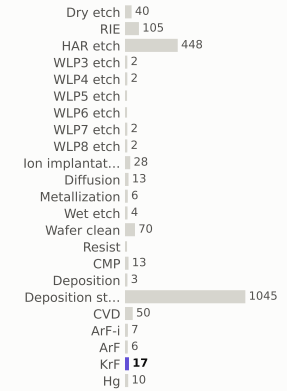

materials deposited (g)

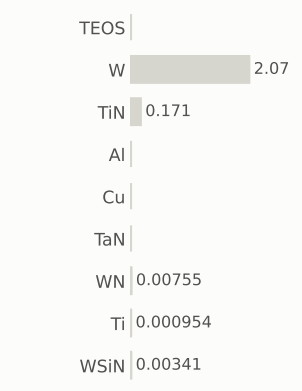

gases emitted (g)

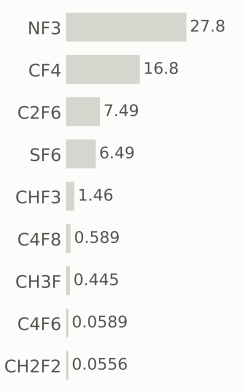

Step #24880: WLP5_etch

etch_anisotropic · WLP5_etch

2.1	2,622.8	0.071%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP5_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.321 g, SF6 0.878 g
energy	2.67 kWh + 1.07 overhead

EPW	1.61 kgCO2e
EPW tool	1.15 kgCO2e
EPW overhead	0.459 kgCO2e
MPW	0.114 kgCO2e (gas 0.114)
GPW	0.374 kgCO2e
embodied carbon	**2.1 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

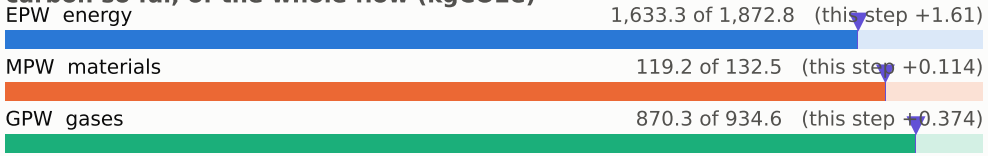

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

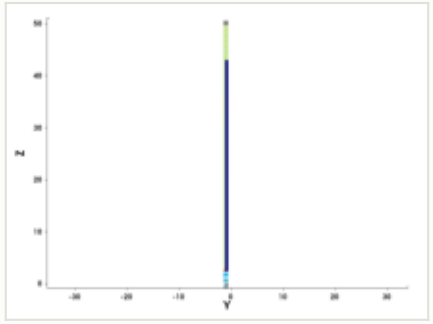

y cut at -1.035 µm

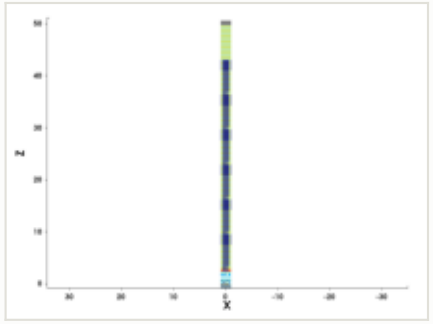

mask for this step

no mask for this step

steps by process area

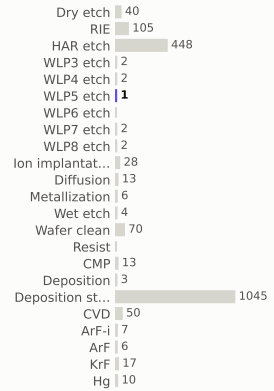

materials deposited (g)

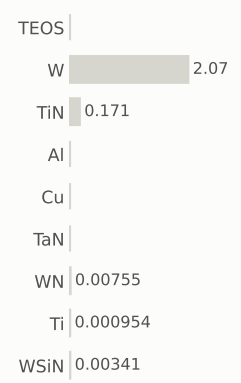

gases emitted (g)

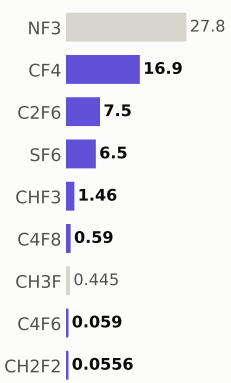

Step #24890: WLP5_etch

etch_anisotropic · WLP5_etch

2.1	2,624.9	0.071%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP5_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.321 g, SF6 0.878 g
energy	2.67 kWh + 1.07 overhead

EPW	1.61 kgCO2e
EPW tool	1.15 kgCO2e
EPW overhead	0.459 kgCO2e
MPW	0.114 kgCO2e (gas 0.114)
GPW	0.374 kgCO2e
embodied carbon	**2.1 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

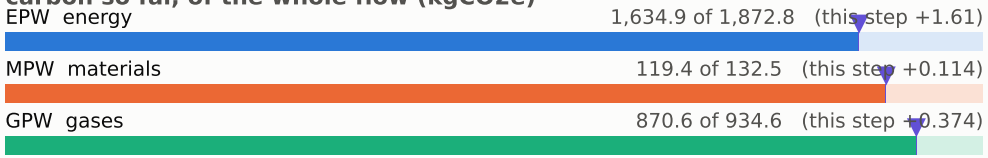

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

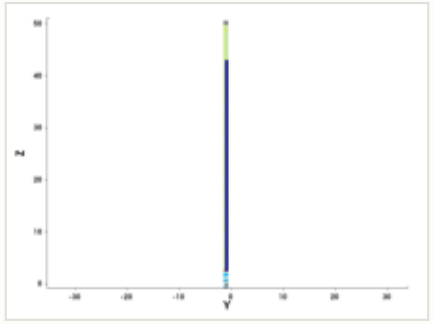

y cut at -1.035 µm

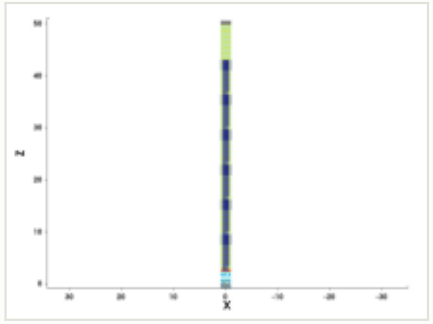

mask for this step

no mask for this step

steps by process area

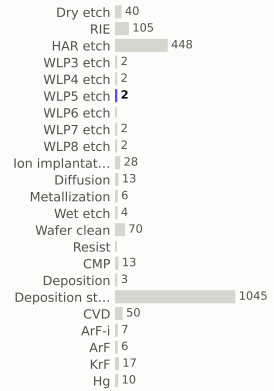

materials deposited (g)

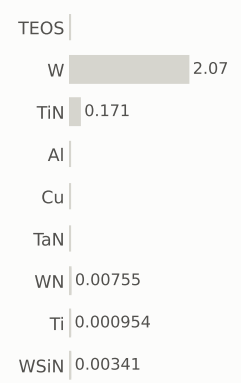

gases emitted (g)

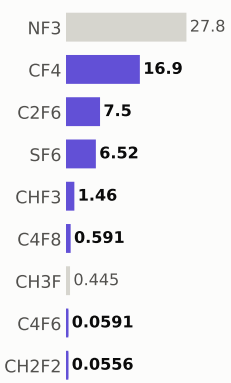

Step #24900: Dry_etch

etch_strip · Dry_etch

0.801	2,625.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

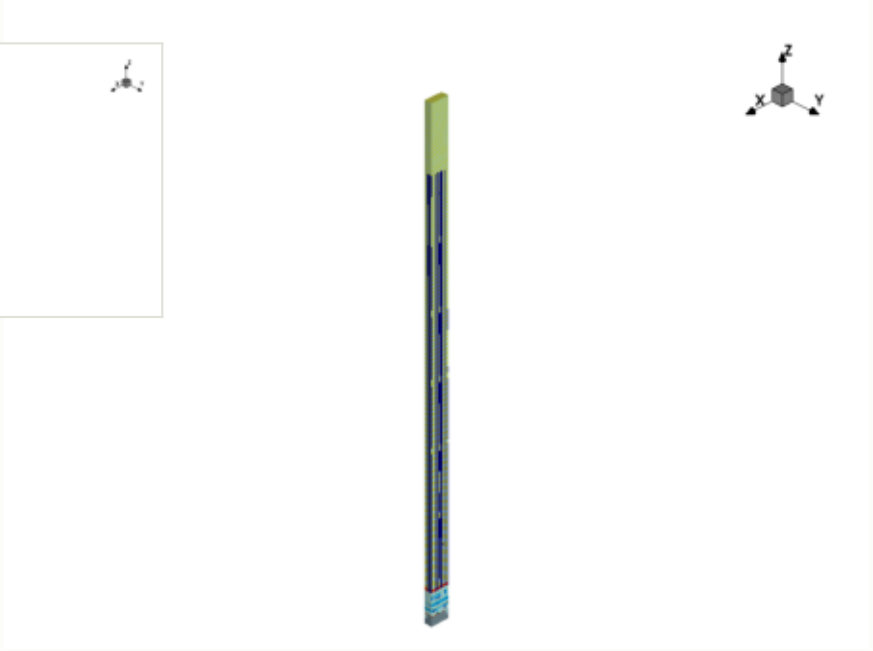

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

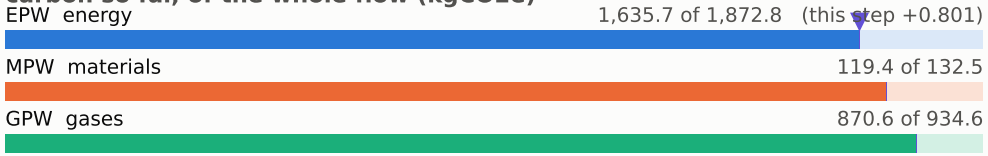

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

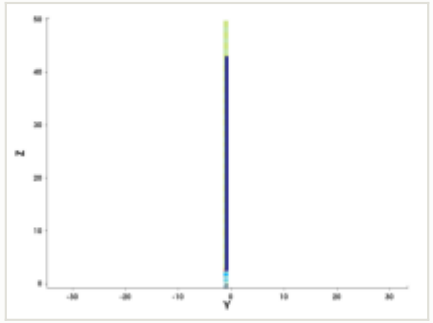

y cut at -1.035 µm

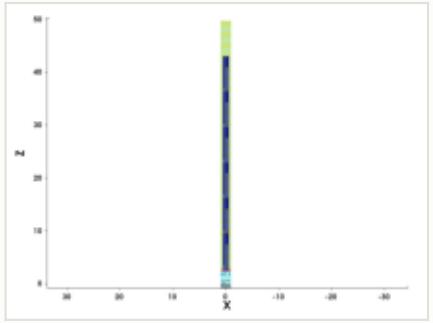

mask for this step

no mask for this step

steps by process area

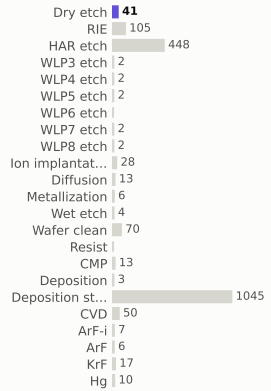

materials deposited (g)

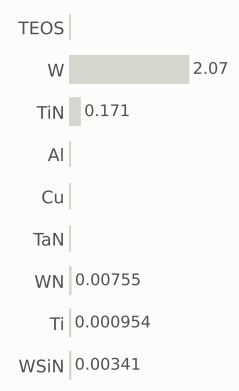

gases emitted (g)

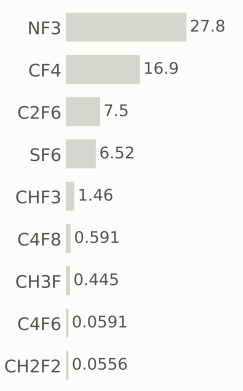

Step #24910: Wafer_clean

clean · Wafer_clean

0.169	2,625.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

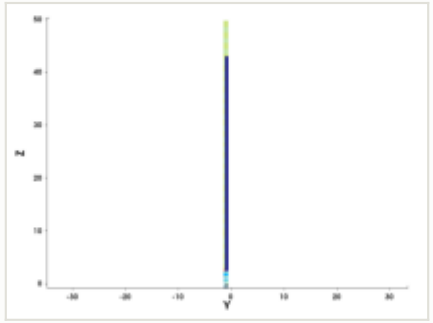

y cut at -1.035 µm

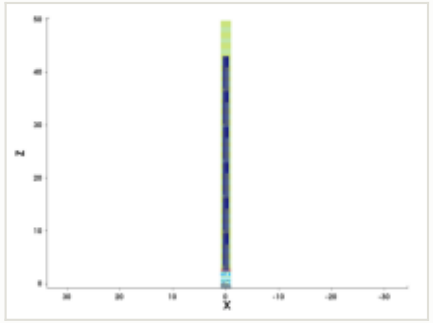

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

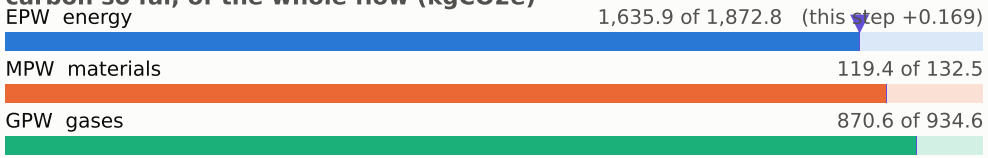

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

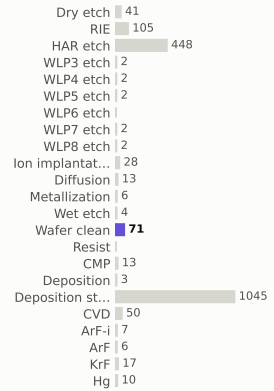

materials deposited (g)

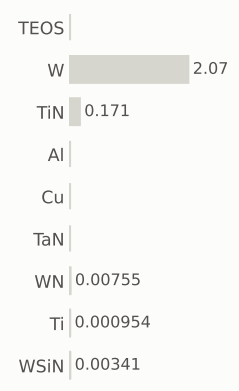

gases emitted (g)

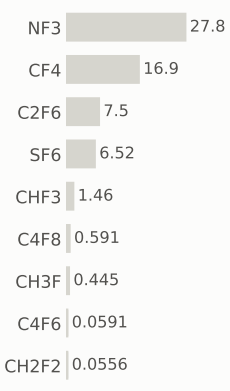

Step #24920: KrF

litho_patterning · KrF

0.199	2,626.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

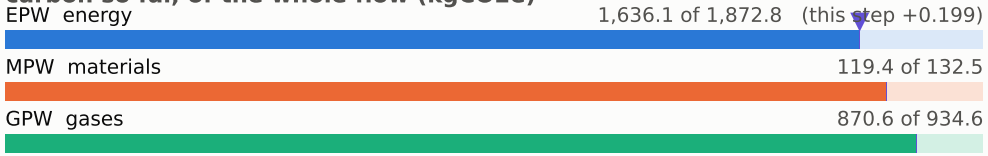

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

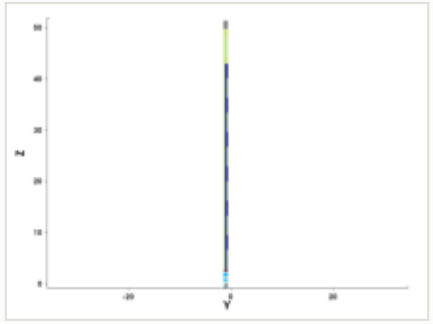

y cut at -1.035 µm

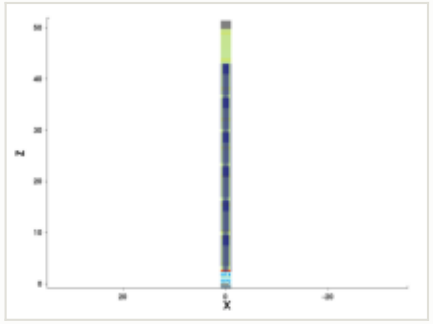

mask: layer 34:0, positive (OASIS)

steps by process area

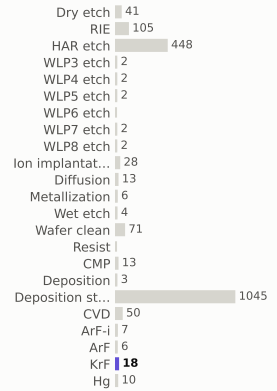

materials deposited (g)

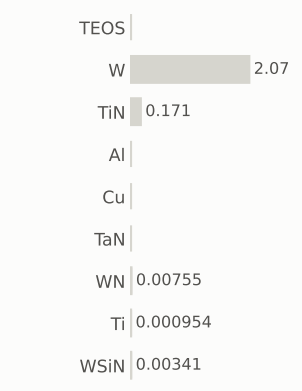

gases emitted (g)

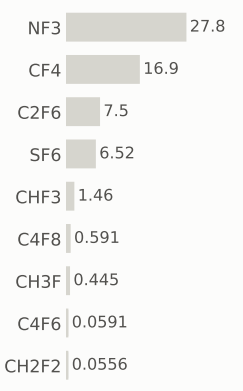

Step #24930: WLP6_etch

etch_anisotropic · WLP6_etch

1.04	2,627.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

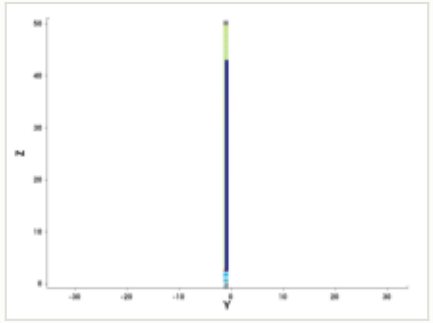

y cut at -1.035 µm

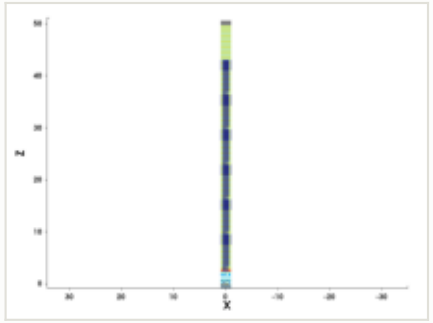

mask for this step

no mask for this step

this step

process area	WLP6_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

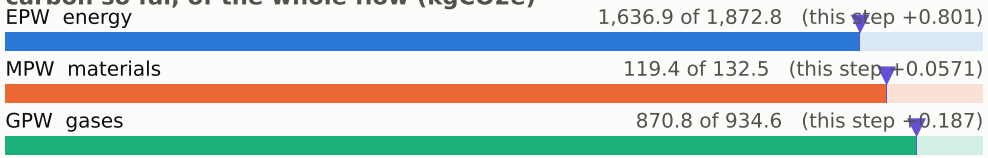

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

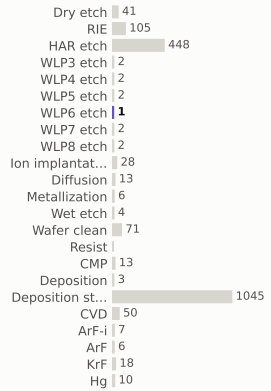

materials deposited (g)

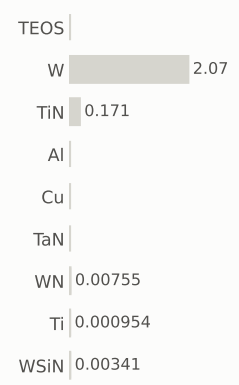

gases emitted (g)

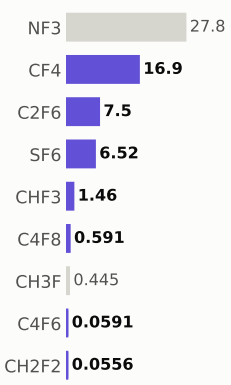

Step #24940: WLP6_etch

etch_anisotropic · WLP6_etch

1.04	2,628.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	WLP6_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

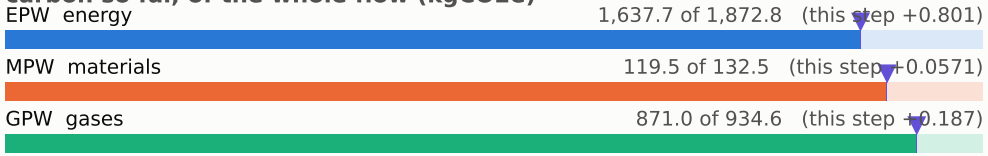

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

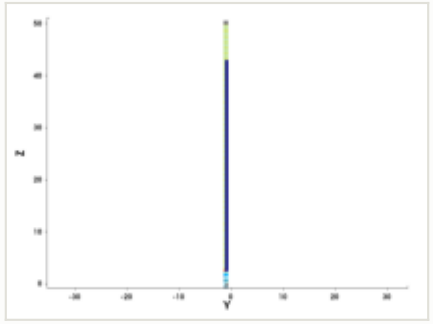

y cut at -1.035 µm

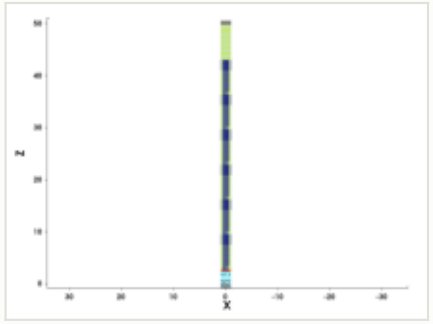

mask for this step

no mask for this step

steps by process area

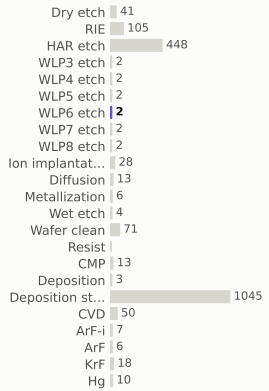

materials deposited (g)

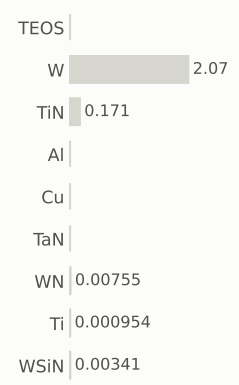

gases emitted (g)

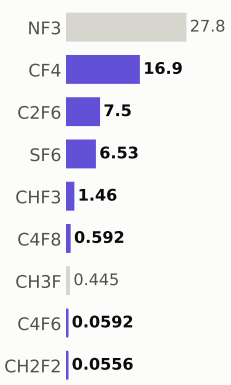

Step #24950: Dry_etch

etch_strip · Dry_etch

0.801	2,628.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

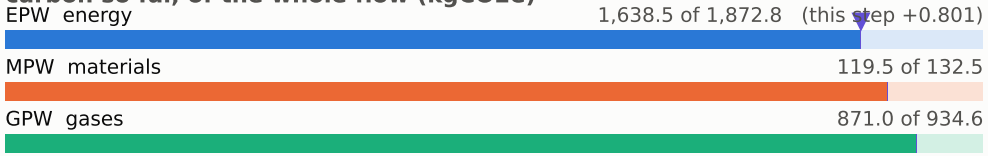

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

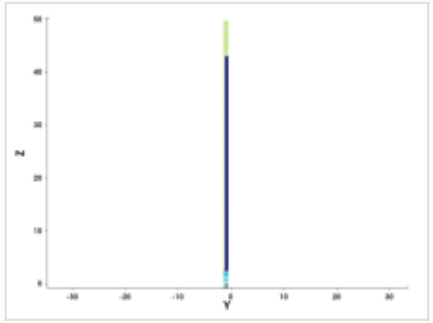

y cut at -1.035 µm

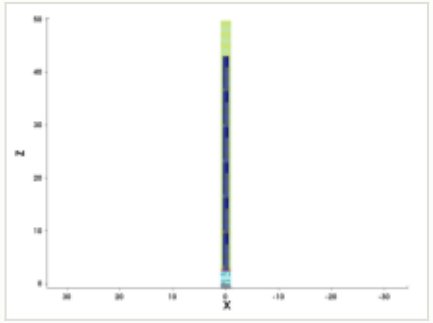

mask for this step

no mask for this step

steps by process area

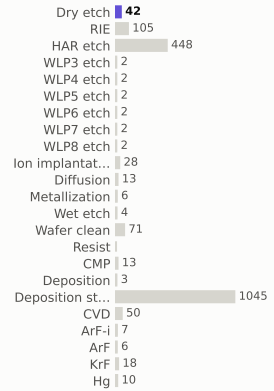

materials deposited (g)

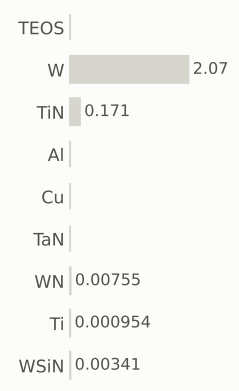

gases emitted (g)

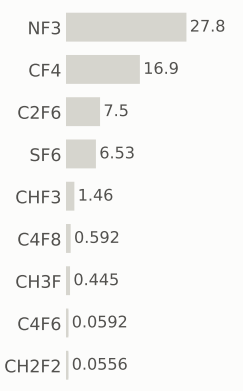

Step #24960: Wafer_clean

clean · Wafer_clean

0.169	2,629.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

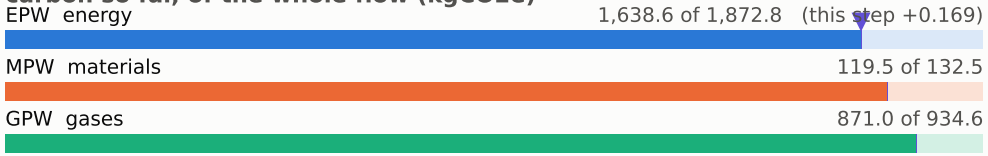

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

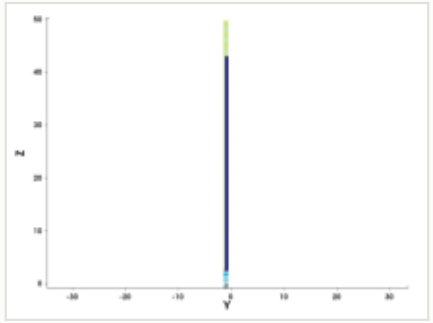

y cut at -1.035 µm

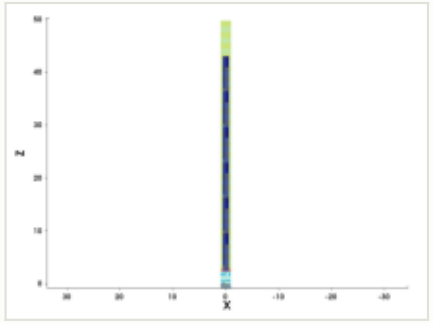

mask for this step

no mask for this step

steps by process area

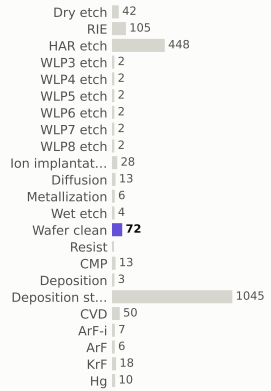

materials deposited (g)

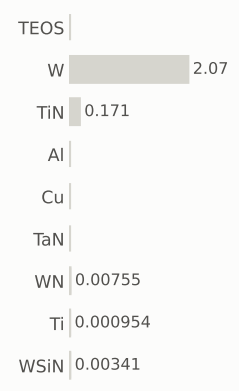

gases emitted (g)

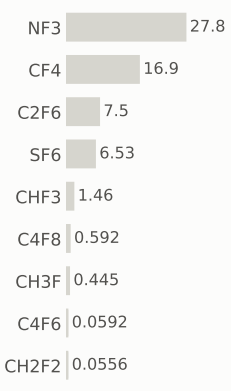

Step #24970: RIE

etch_anisotropic · RIE

1.04	2,630.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

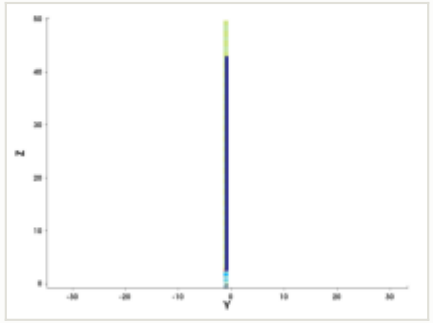

y cut at -1.035 µm

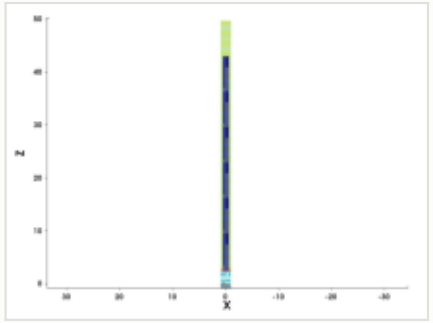

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

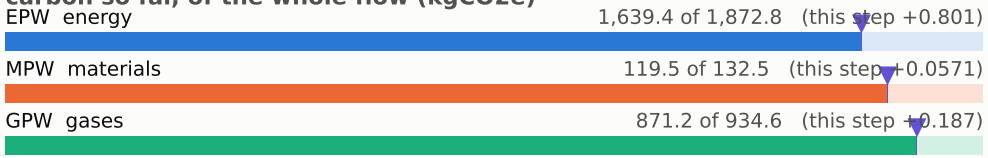

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

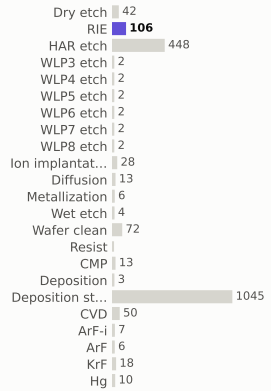

materials deposited (g)

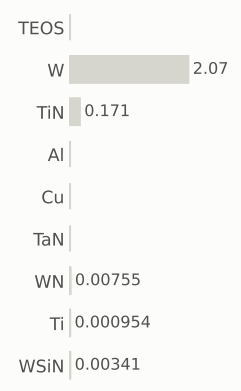

gases emitted (g)

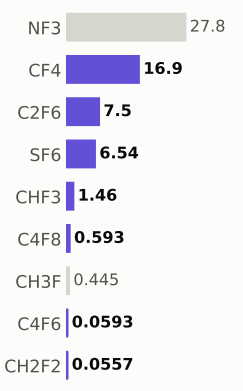

Step #24980: CVD

depo_isotropic · CVD

1.31	2,631.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.034 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

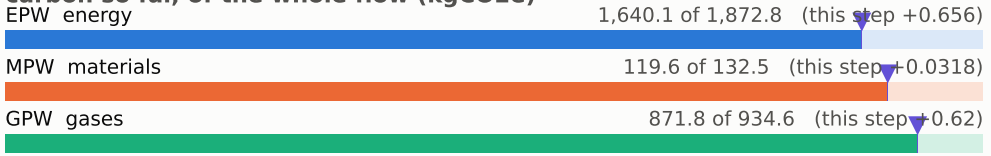

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

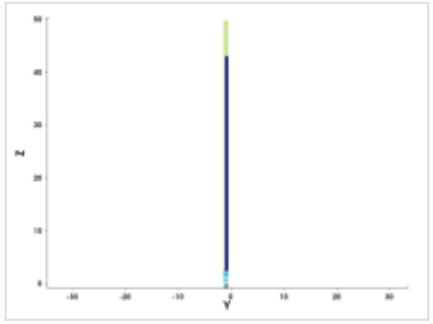

y cut at -1.035 µm

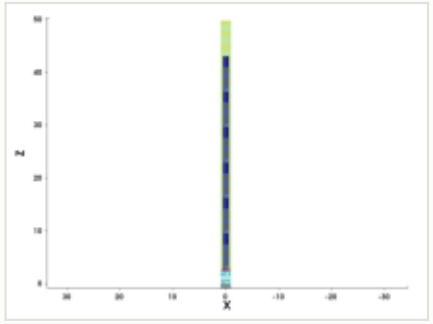

mask for this step

no mask for this step

steps by process area

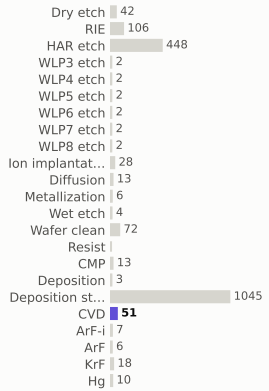

materials deposited (g)

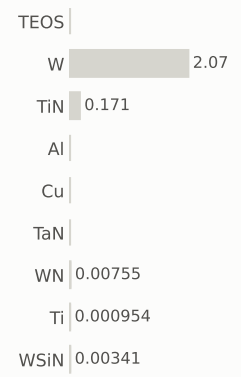

gases emitted (g)

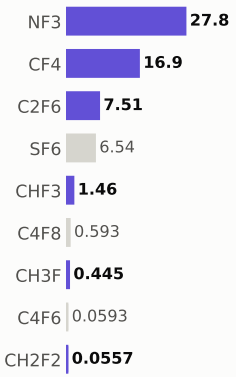

Step #24990: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	2,632.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

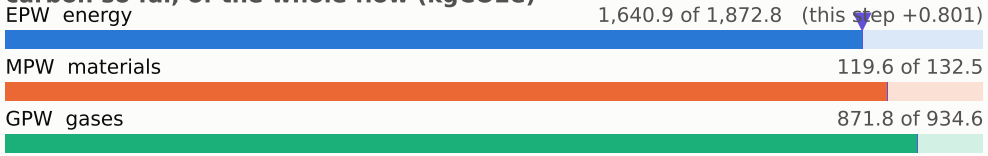

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

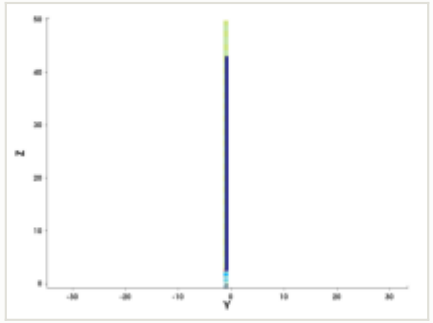

y cut at -1.035 µm

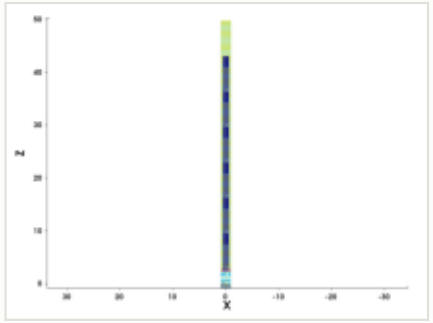

mask for this step

no mask for this step

steps by process area

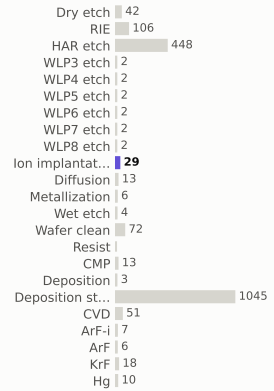

materials deposited (g)

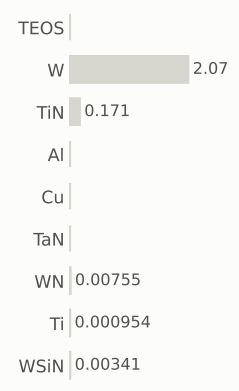

gases emitted (g)

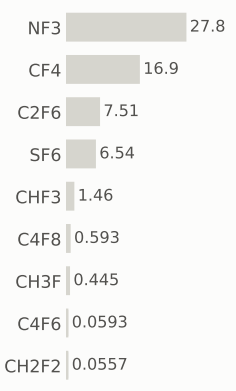

Step #25000: Wet_etch

etch_isotropic · Wet_etch

0.169	2,632.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

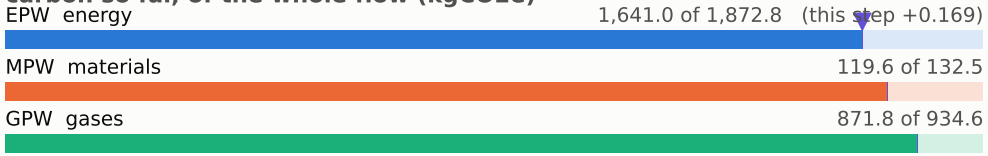

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

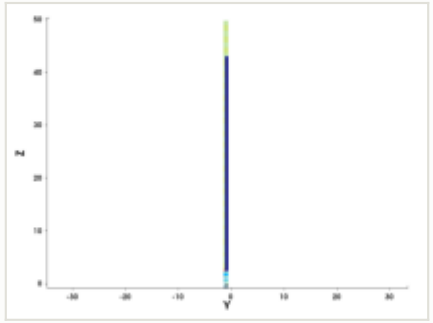

y cut at -1.035 µm

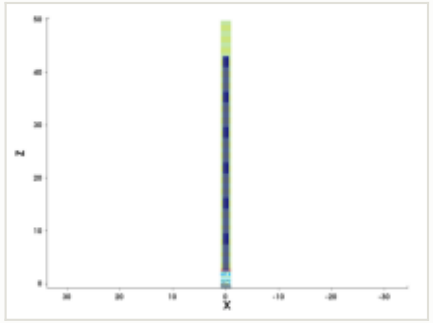

mask for this step

no mask for this step

steps by process area

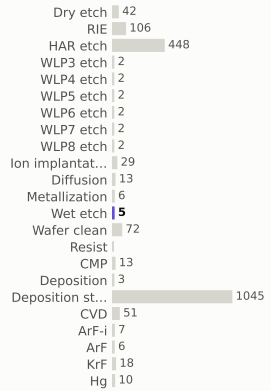

materials deposited (g)

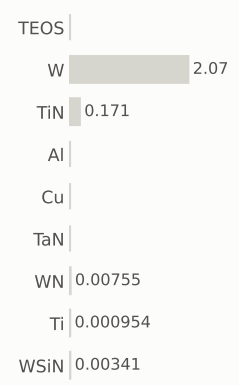

gases emitted (g)



Step #25010: CVD

depo_isotropic · CVD

1.31	2,633.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

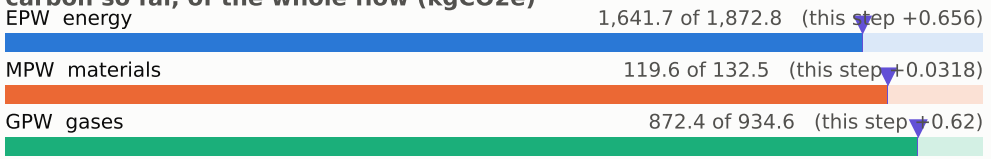

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

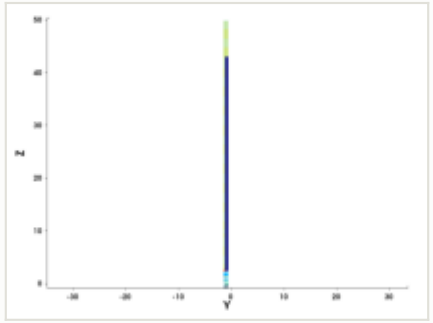

y cut at -1.035 µm

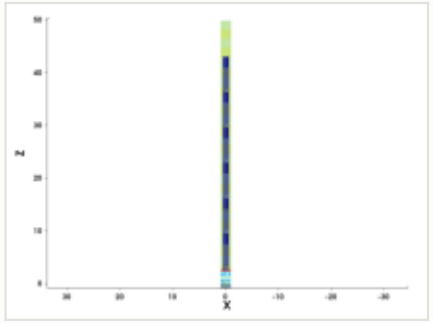

mask for this step

no mask for this step

steps by process area

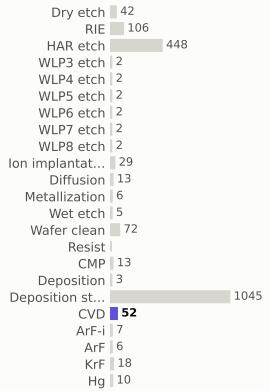

materials deposited (g)

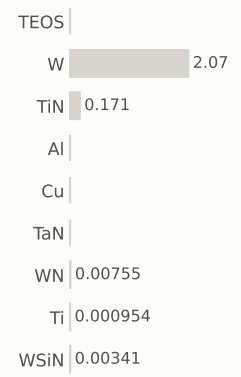

gases emitted (g)

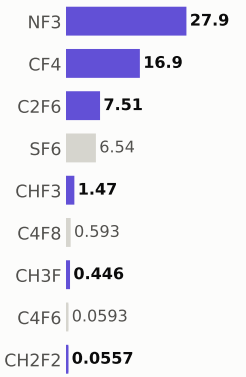

Step #25020: CVD

depo_isotropic · CVD

1.32	2,635.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	TEOS
thickness	48.2 µm
material GWP	2.85952 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0409 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.32 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

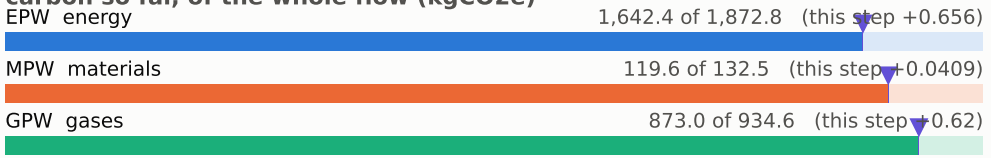

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

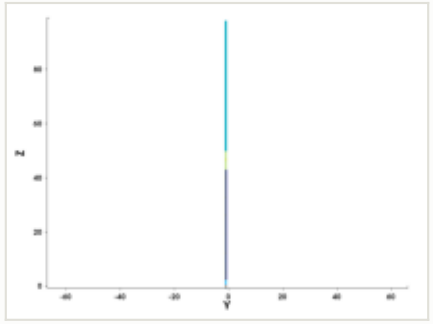

y cut at -1.035 µm

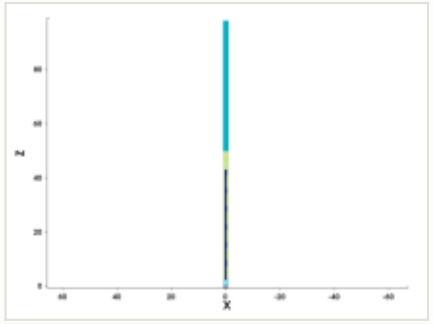

mask for this step

no mask for this step

steps by process area

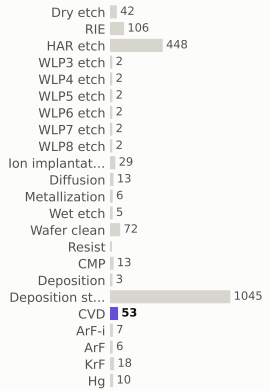

materials deposited (g)

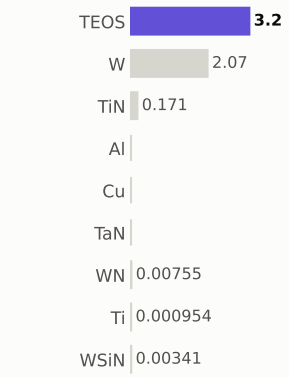

gases emitted (g)

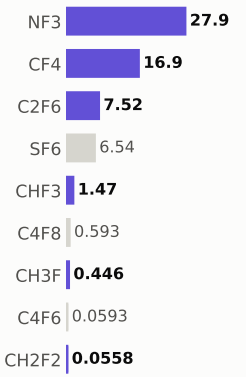

Step #25030: CMP

etch_cmp · CMP

0.169	2,635.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

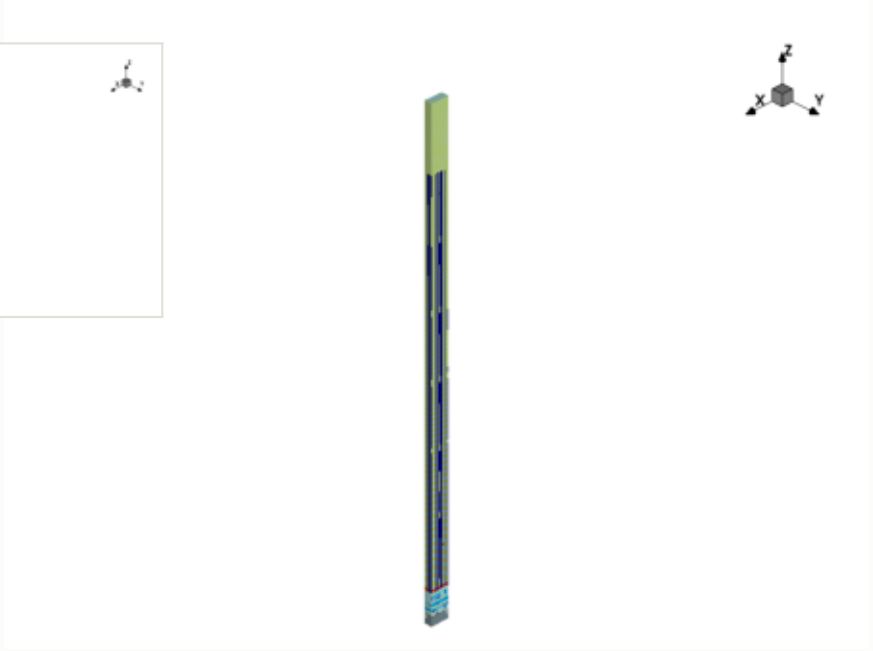

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

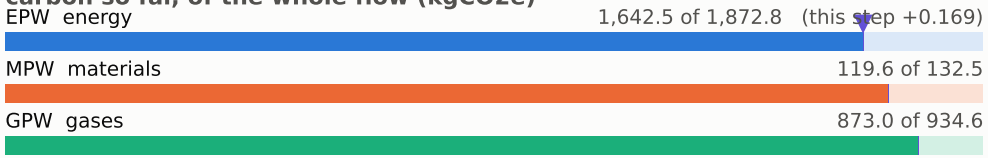

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

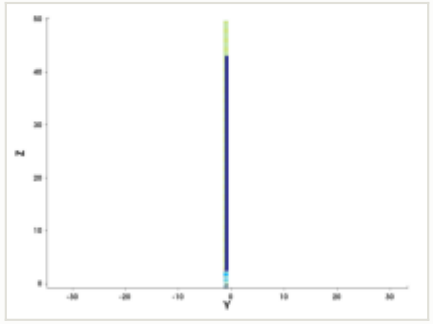

y cut at -1.035 µm

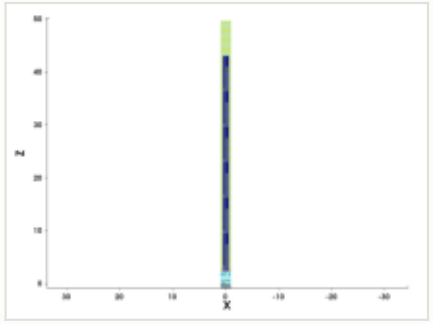

mask for this step

no mask for this step

steps by process area

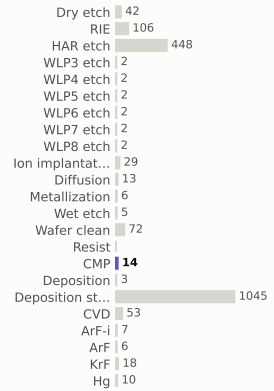

materials deposited (g)

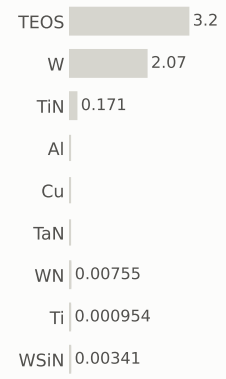

gases emitted (g)

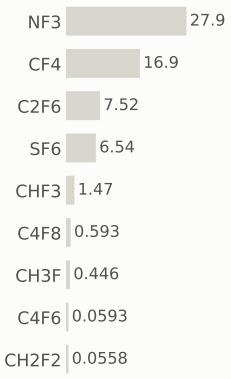

Step #25040: Wafer_clean

clean · Wafer_clean

0.169	2,635.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

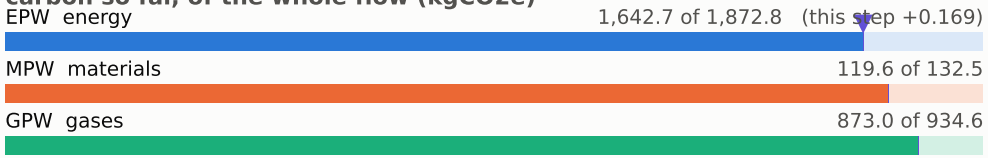

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

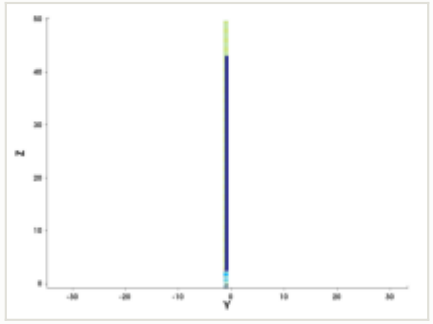

y cut at -1.035 µm

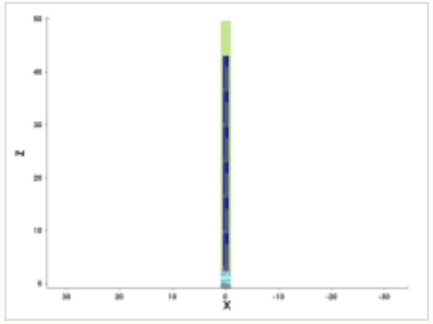

mask for this step

no mask for this step

steps by process area

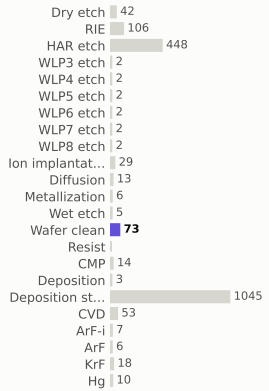

materials deposited (g)

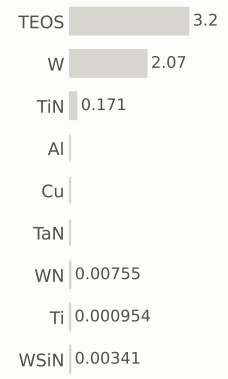

gases emitted (g)

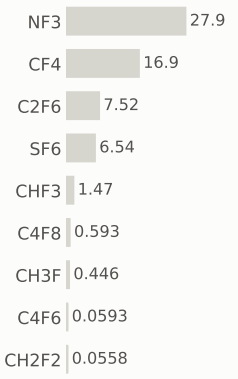

Step #25050: CVD

depo_isotropic · CVD

1.31	2,636.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.13 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

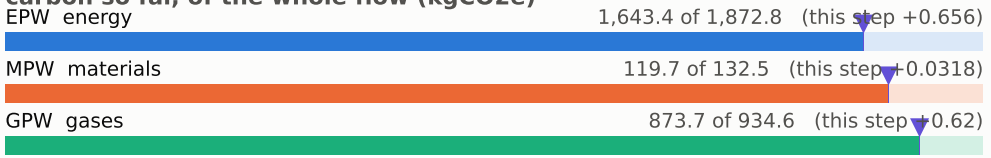

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

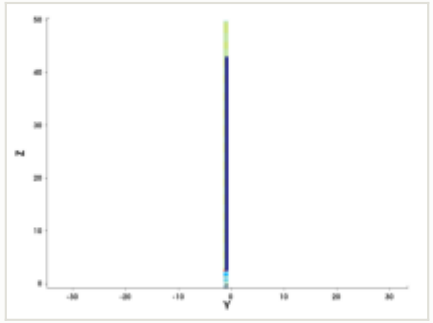

y cut at -1.035 µm

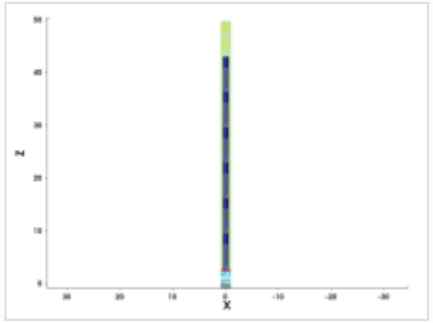

mask for this step

no mask for this step

steps by process area

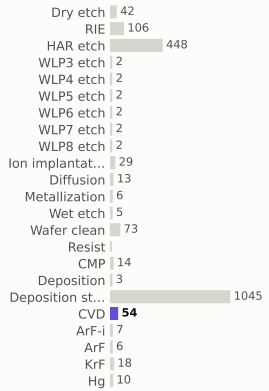

materials deposited (g)



gases emitted (g)

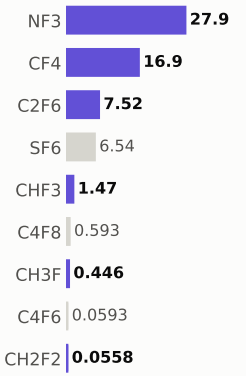

Step #25070: CVD

depo_isotropic · CVD

1.31	2,638.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

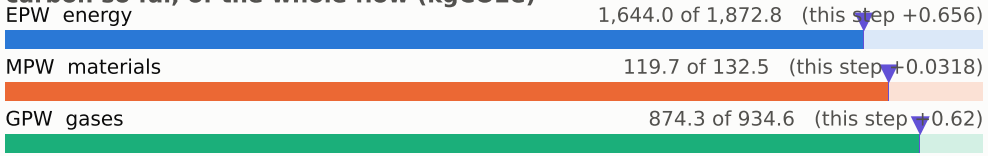

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

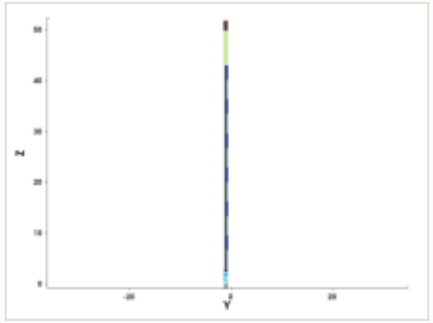

y cut at -1.035 µm

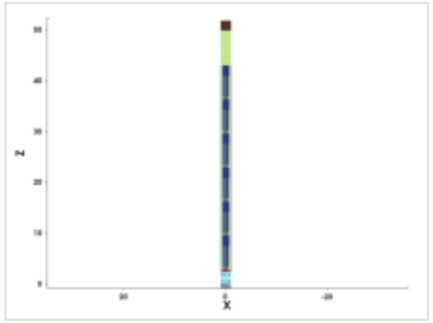

mask for this step

no mask for this step

steps by process area

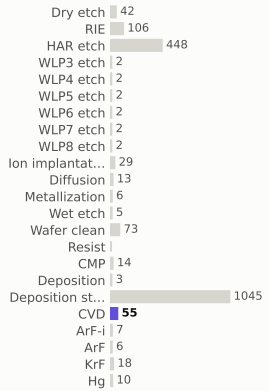

materials deposited (g)

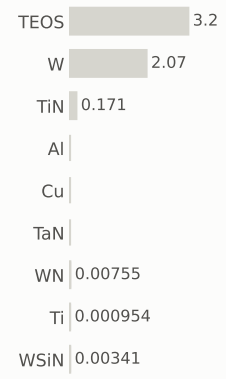

gases emitted (g)

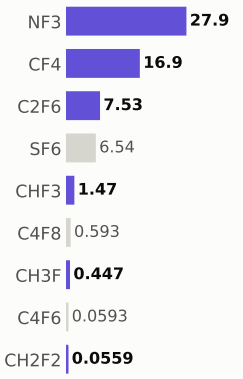

Step #25080: CVD

depo_isotropic · CVD

1.31	2,639.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

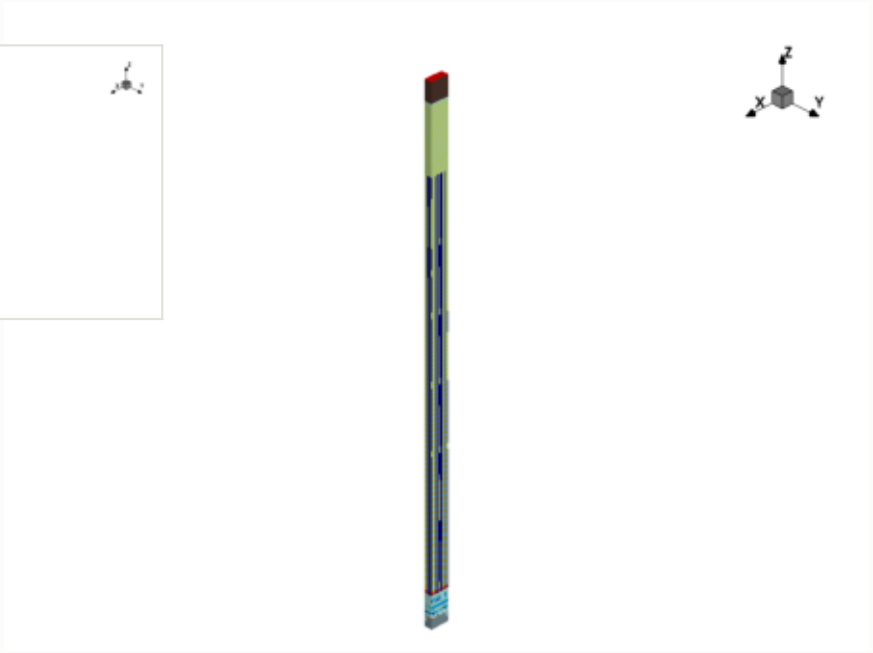

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

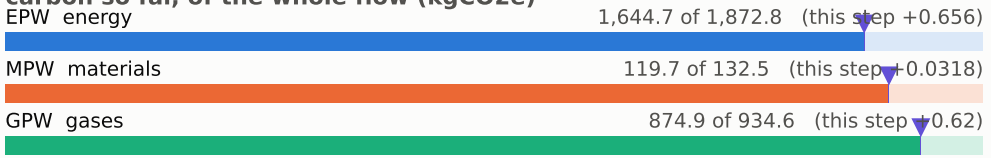

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

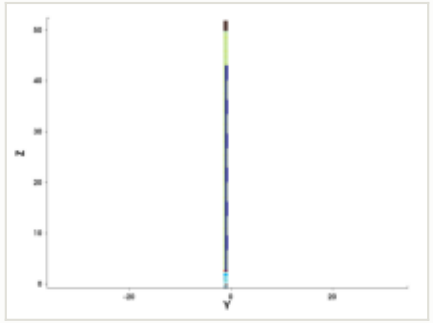

y cut at -1.035 µm

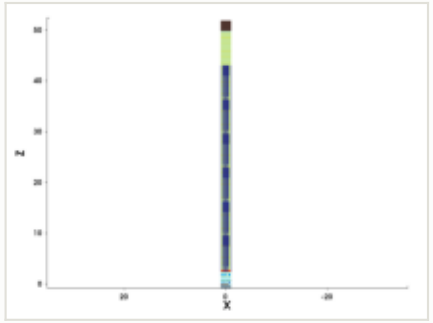

mask for this step

no mask for this step

steps by process area

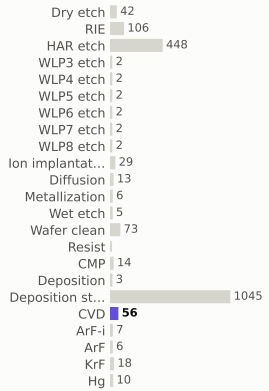

materials deposited (g)

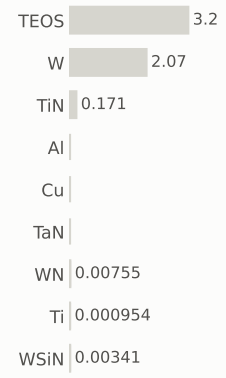

gases emitted (g)



Step #25090: Wafer_clean

clean · Wafer_clean

0.169	2,639.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

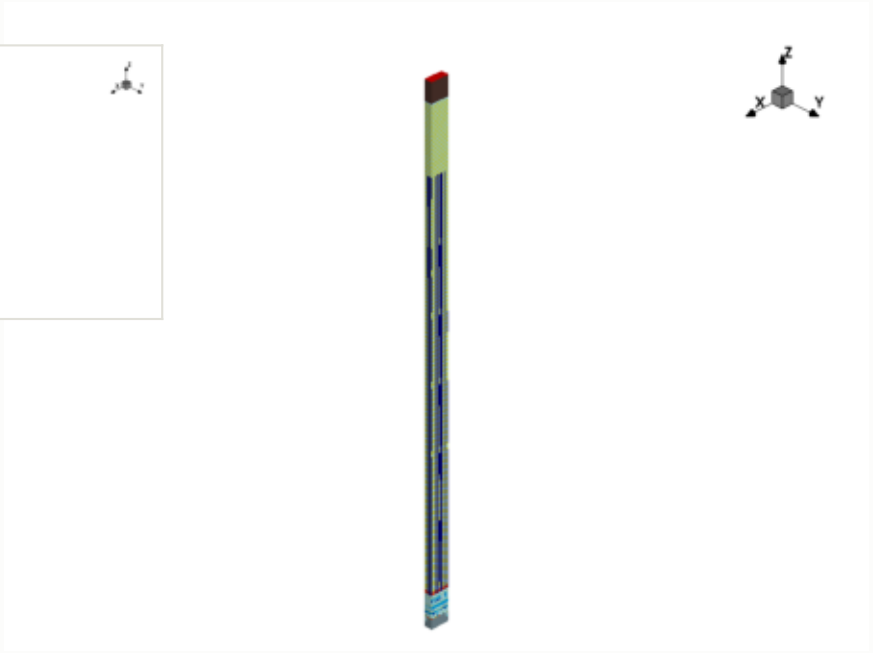

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

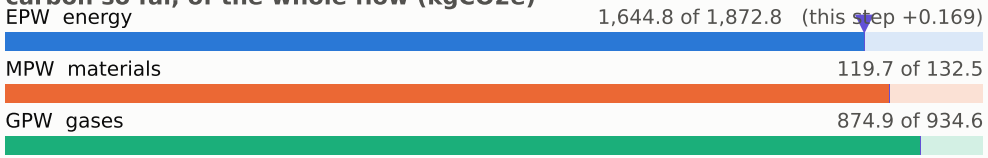

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

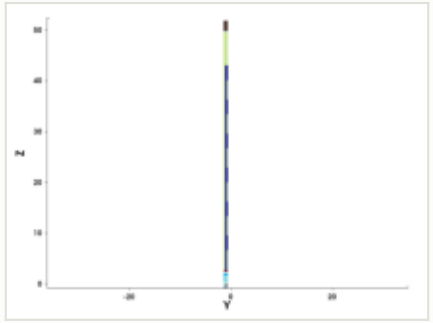

y cut at -1.035 µm

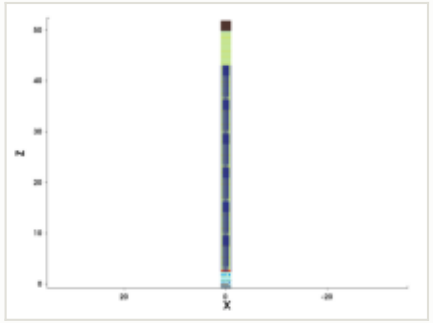

mask for this step

no mask for this step

steps by process area

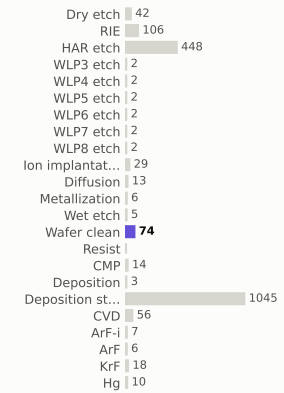

materials deposited (g)



gases emitted (g)



Step #25100: ArF-i

litho_patterning · ArF-i

0.217	2,639.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

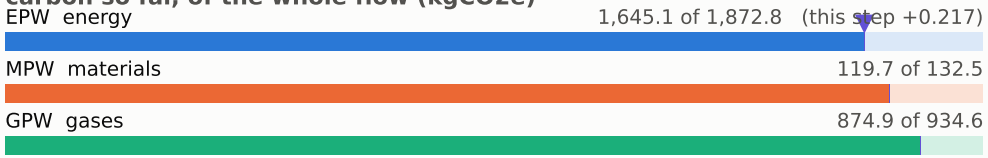

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

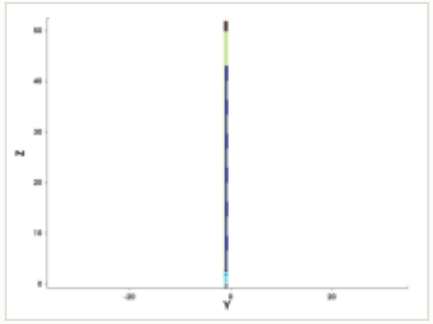

y cut at -1.035 µm

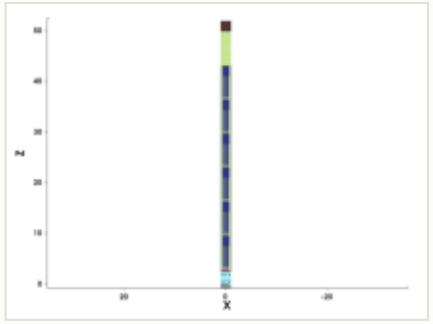

mask: layer 35:0 (OASIS)

steps by process area

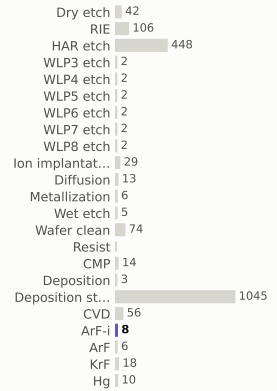

materials deposited (g)



gases emitted (g)

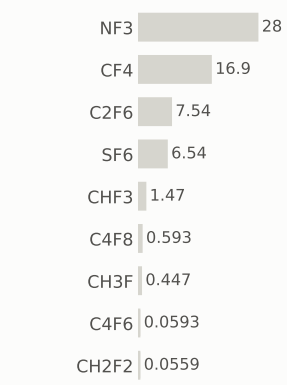

Step #25110: RIE

etch_anisotropic · RIE

1.04	2,640.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

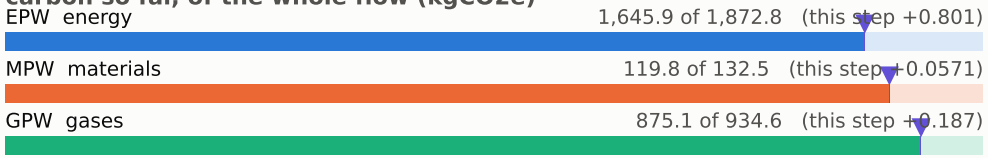

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

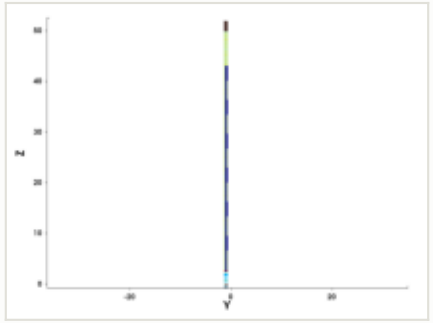

y cut at -1.035 µm

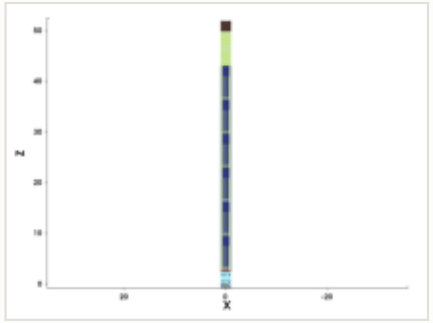

mask for this step

no mask for this step

steps by process area

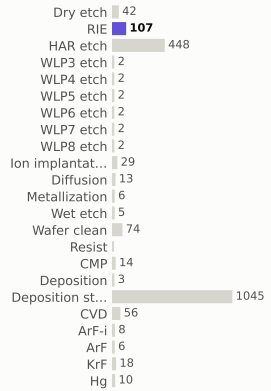

materials deposited (g)

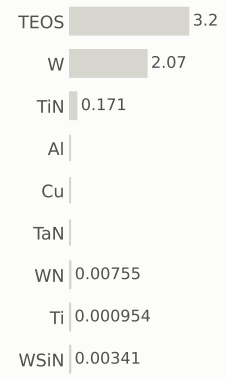

gases emitted (g)



Step #25120: RIE

etch_anisotropic · RIE

1.04	2,641.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

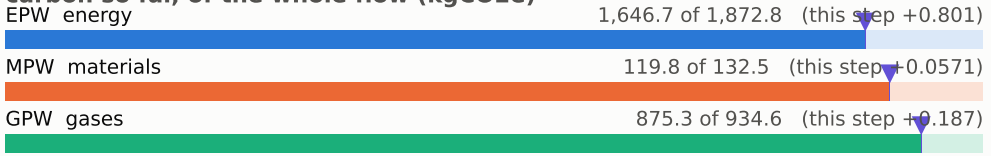

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

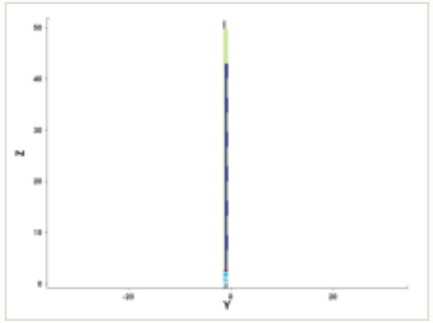

y cut at -1.035 µm

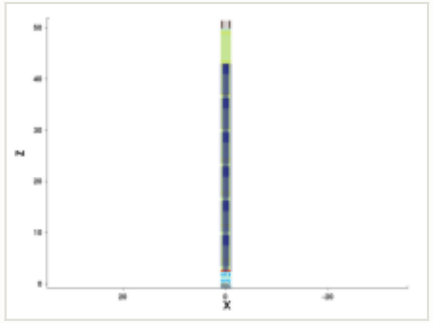

mask for this step

no mask for this step

steps by process area

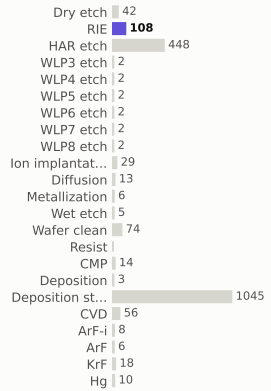

materials deposited (g)

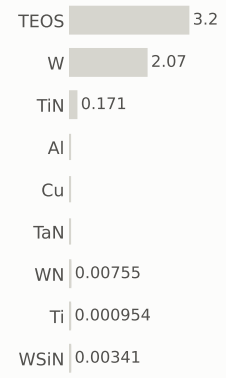

gases emitted (g)



Step #25130: RIE

etch_anisotropic · RIE

1.04	2,642.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

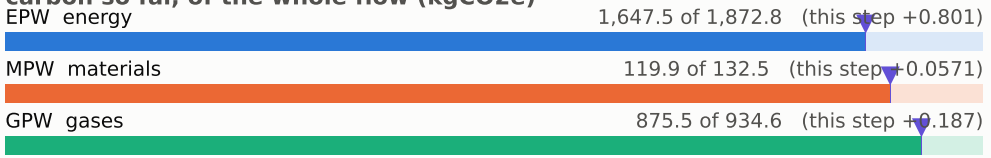

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

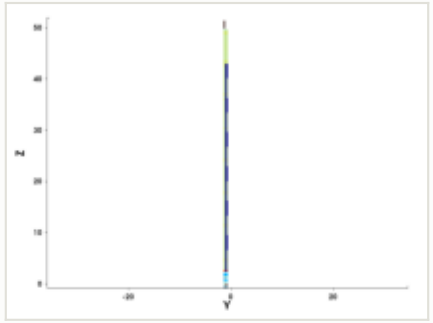

y cut at -1.035 µm

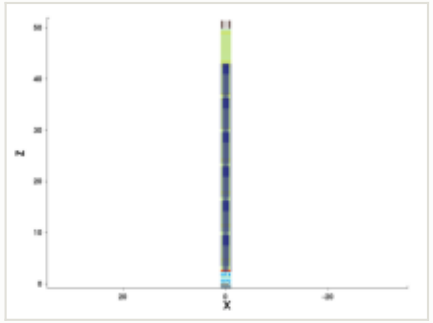

mask for this step

no mask for this step

steps by process area

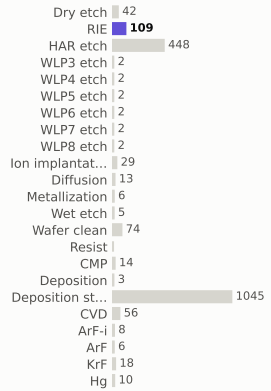

materials deposited (g)

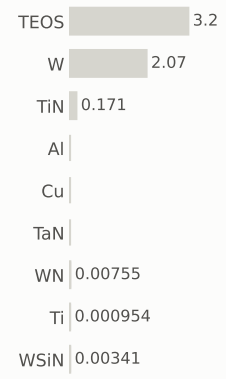

gases emitted (g)



Step #25140: HAR_etch

etch_anisotropic · HAR_etch

1.04	2,643.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

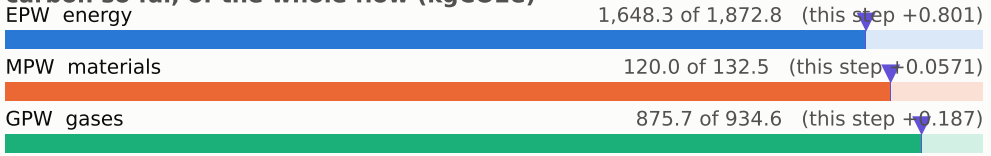

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

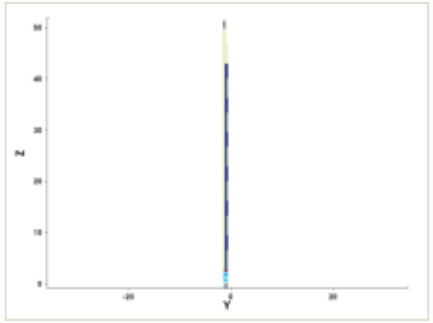

y cut at -1.035 µm

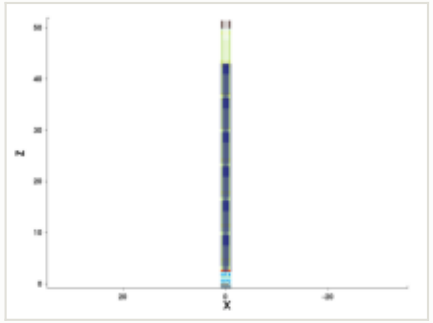

mask for this step

no mask for this step

steps by process area

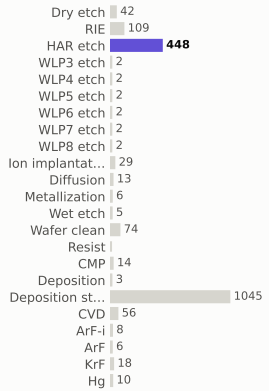

materials deposited (g)

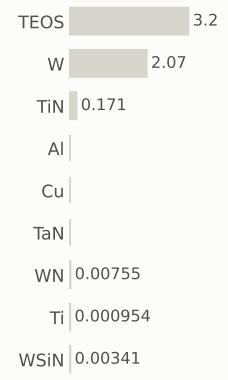

gases emitted (g)



Step #25140.0671: HAR_etch

etch_noop · HAR_etch

1.04	2,644.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

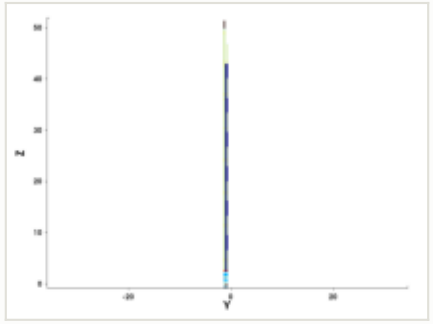

y cut at -1.035 µm

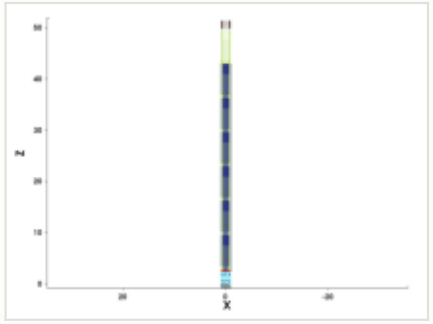

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

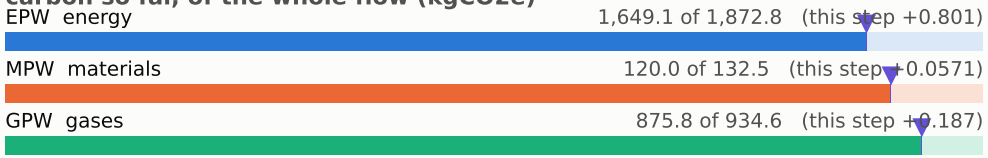

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

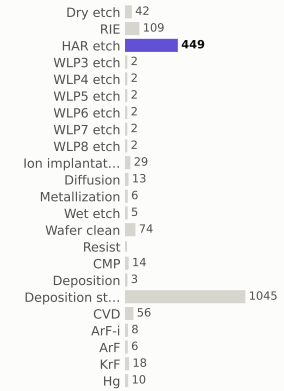

materials deposited (g)

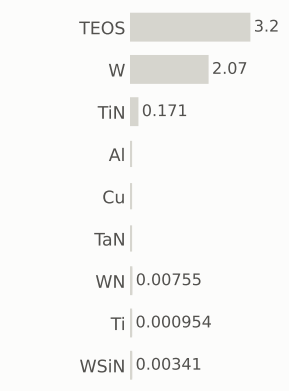

gases emitted (g)

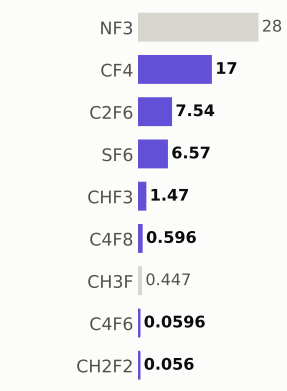

Step #25140.1342: HAR_etch

etch_noop · HAR_etch

1.04	2,646.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

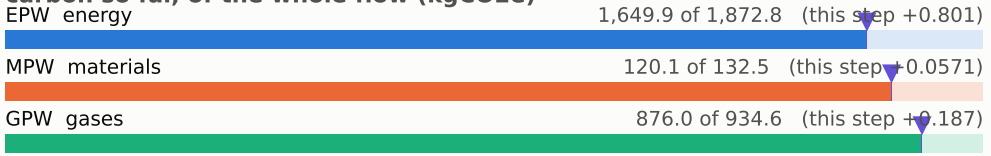

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

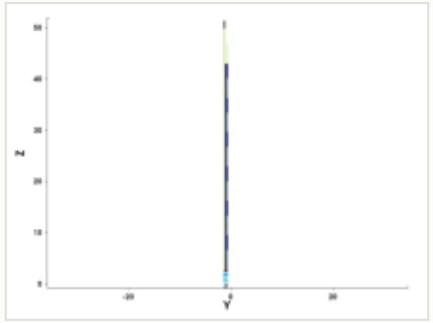

y cut at -1.035 µm

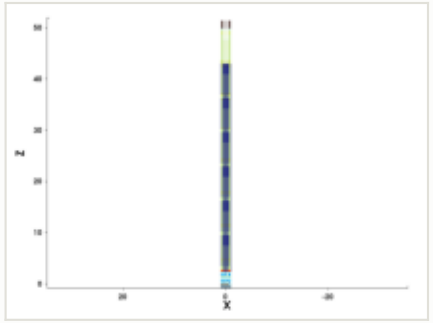

mask for this step

no mask for this step

steps by process area

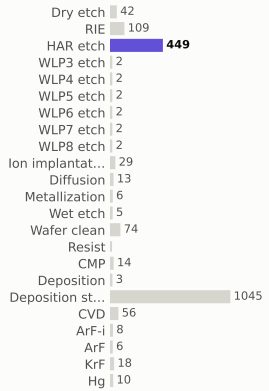

materials deposited (g)

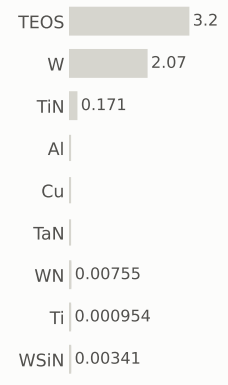

gases emitted (g)



Step #25140.2013: HAR_etch

etch_noop · HAR_etch

1.04	2,647.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

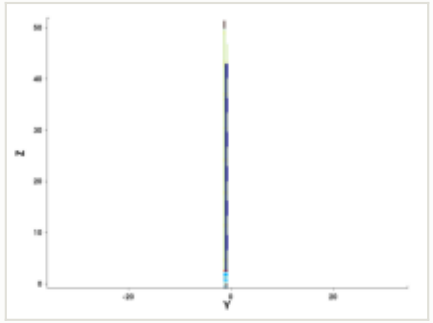

y cut at -1.035 µm

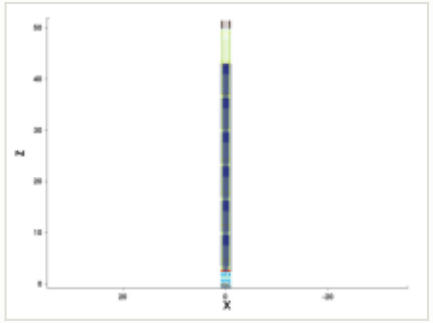

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

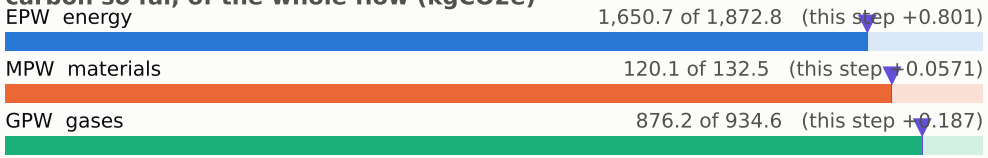

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

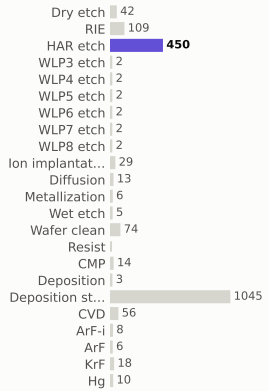

materials deposited (g)

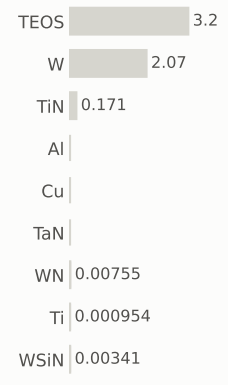

gases emitted (g)



Step #25140.2685: HAR_etch

etch_noop · HAR_etch

1.04	2,648.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

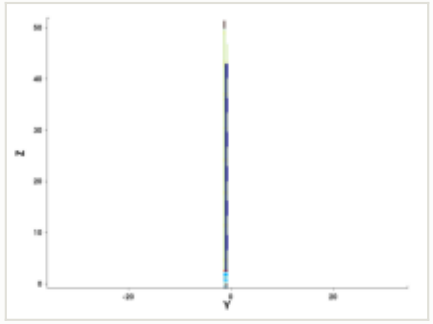

y cut at -1.035 µm

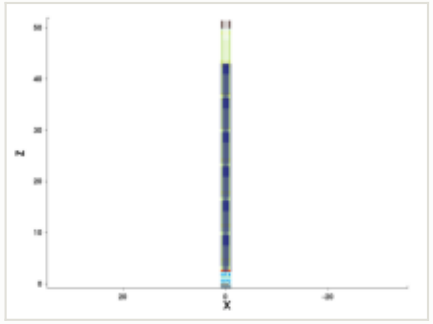

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

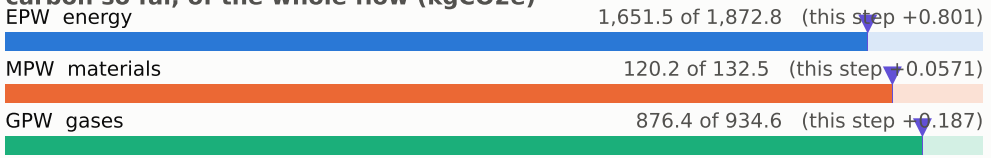

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

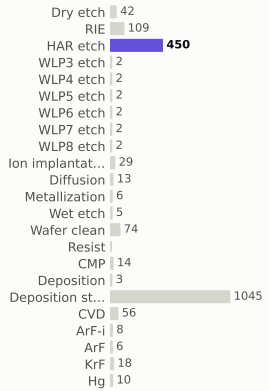

materials deposited (g)

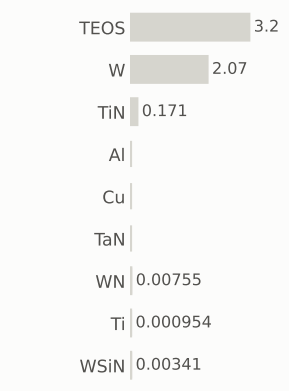

gases emitted (g)

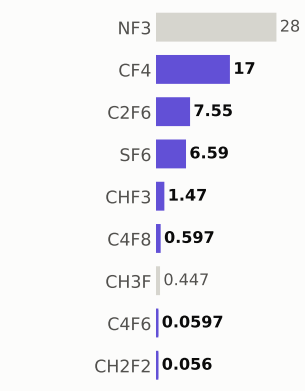

Step #25140.3356: HAR_etch

etch_noop · HAR_etch

1.04	2,649.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

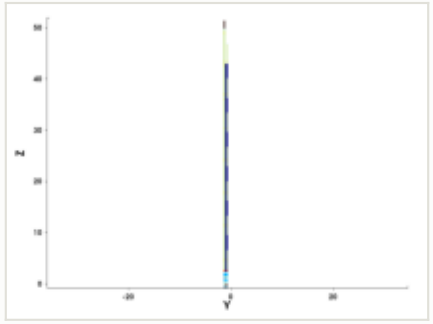

y cut at -1.035 µm

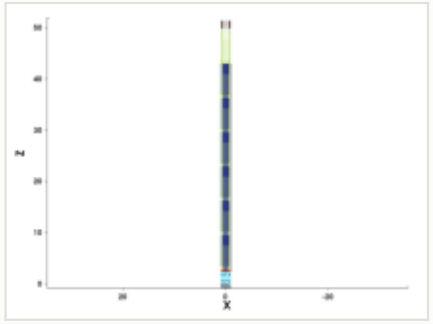

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

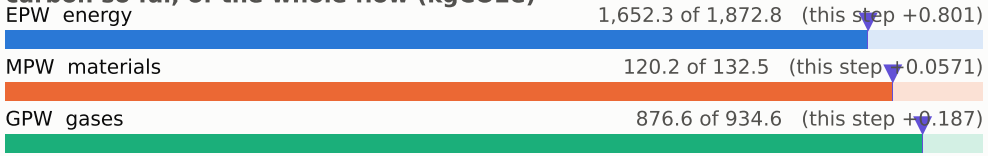

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

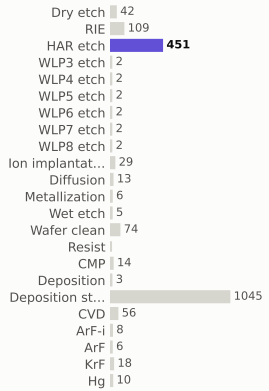

materials deposited (g)

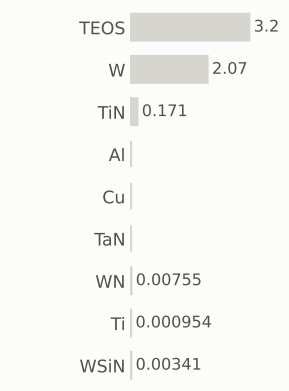

gases emitted (g)

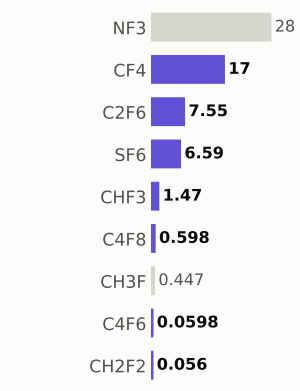

Step #25140.4027: HAR_etch

etch_noop · HAR_etch

1.04	2,650.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

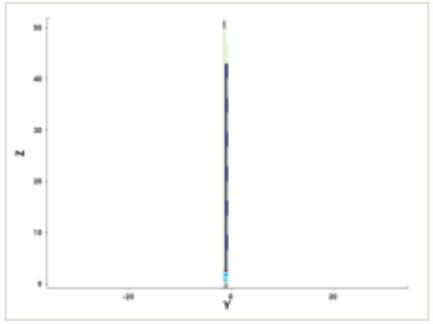

y cut at -1.035 µm

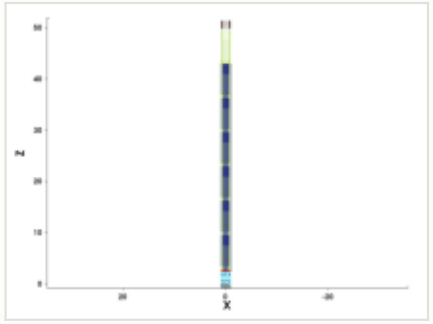

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

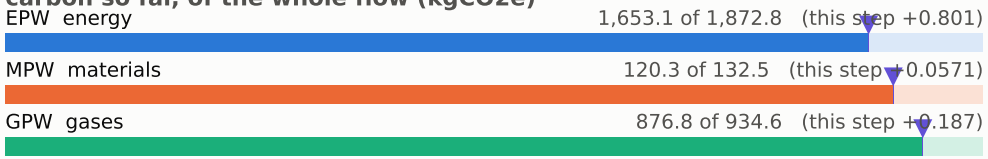

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

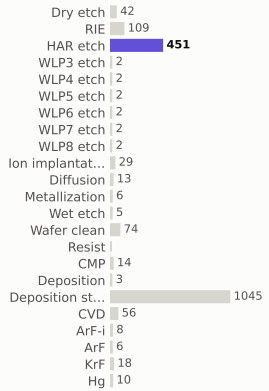

materials deposited (g)

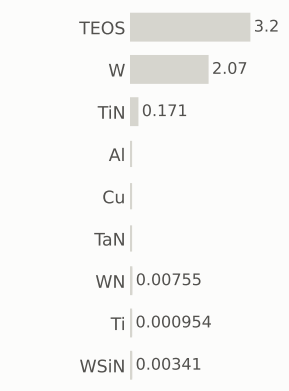

gases emitted (g)

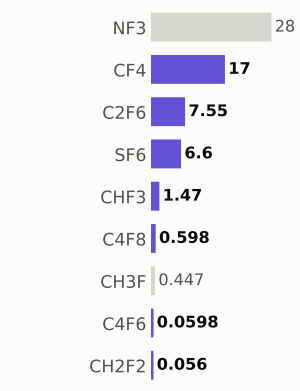

Step #25140.4698: HAR_etch

etch_noop · HAR_etch

1.04	2,651.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

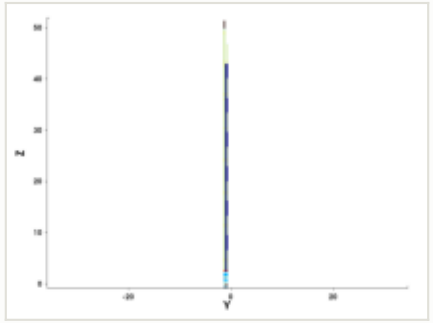

y cut at -1.035 µm

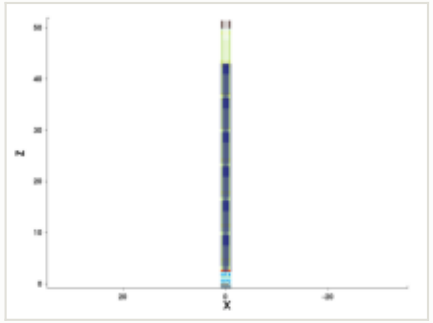

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

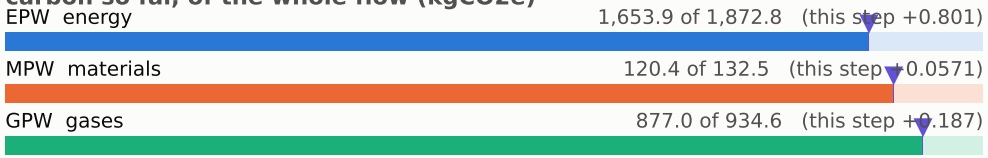

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

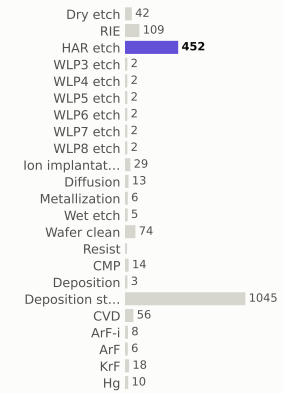

materials deposited (g)

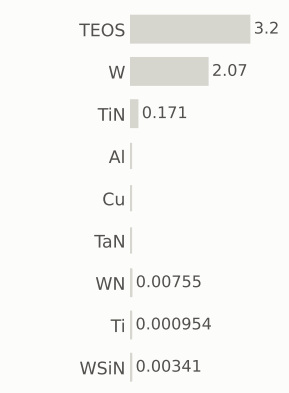

gases emitted (g)

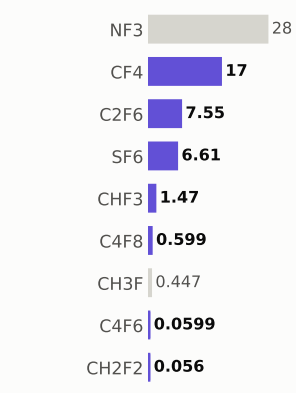

Step #25140.5369: HAR_etch

etch_noop · HAR_etch

1.04	2,652.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

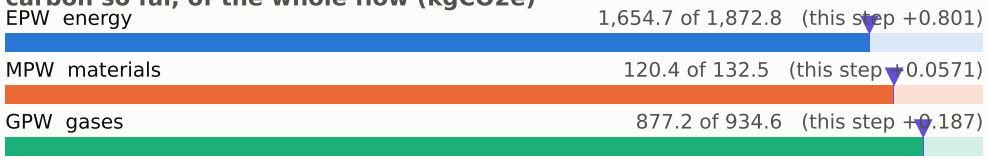

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

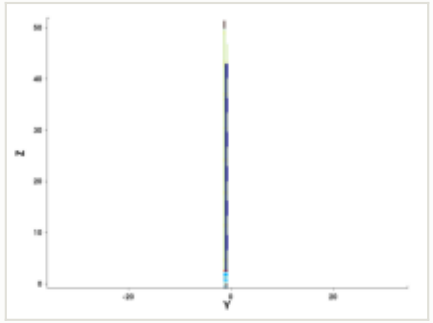

y cut at -1.035 µm

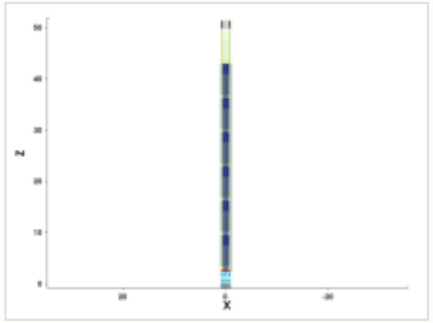

mask for this step

no mask for this step

steps by process area

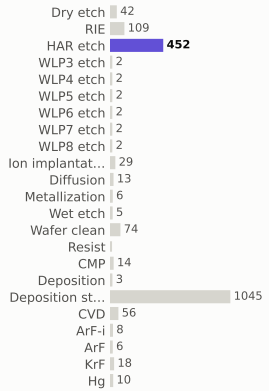

materials deposited (g)

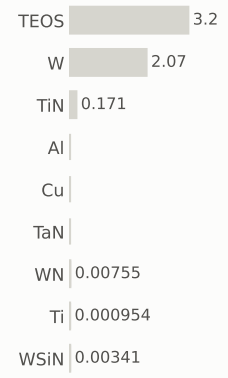

gases emitted (g)



Step #25140.604: HAR_etch

etch_noop · HAR_etch

1.04	2,653.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

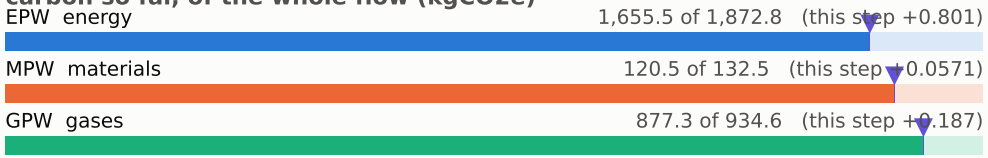

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

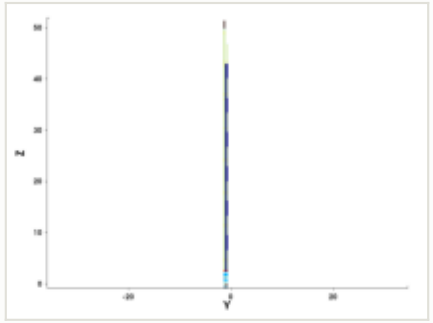

y cut at -1.035 µm

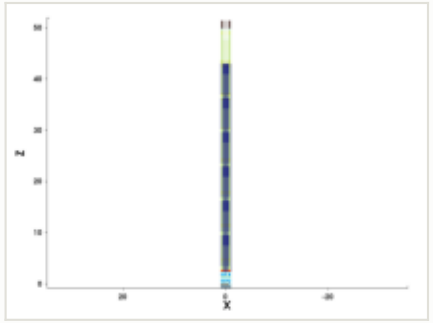

mask for this step

no mask for this step

steps by process area

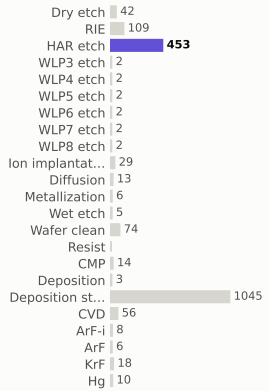

materials deposited (g)

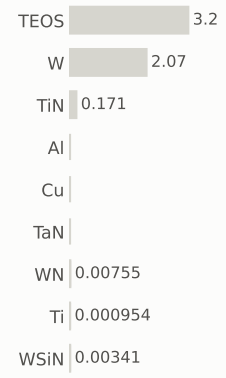

gases emitted (g)



Step #25140.6711: HAR_etch

etch_noop · HAR_etch

1.04	2,654.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

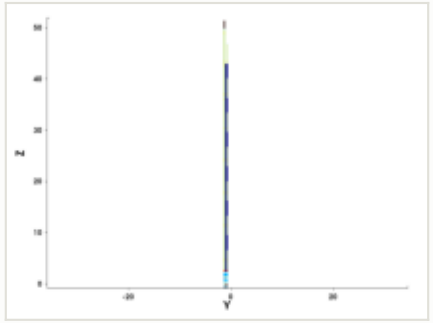

y cut at -1.035 µm

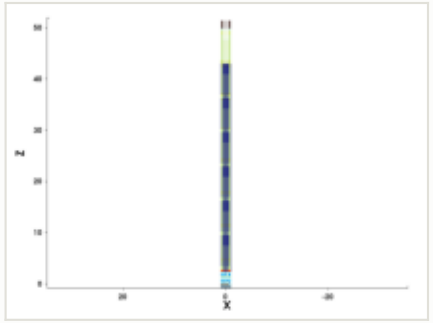

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

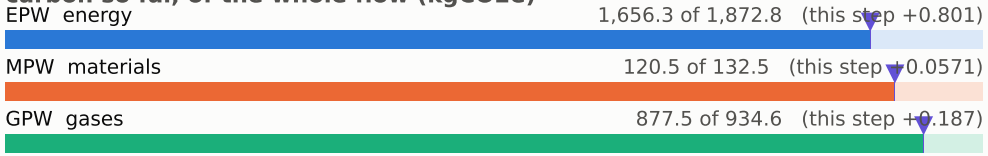

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

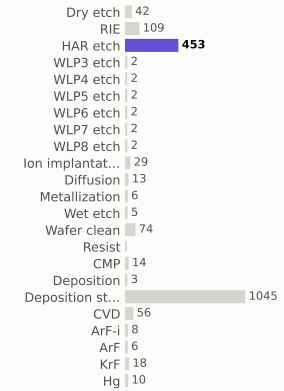

materials deposited (g)

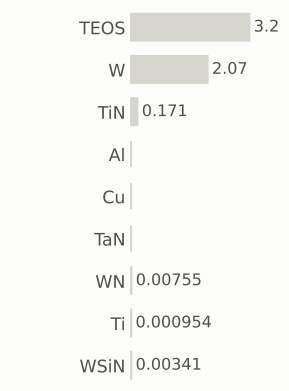

gases emitted (g)



Step #25140.7383: HAR_etch

etch_noop · HAR_etch

1.04	2,655.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

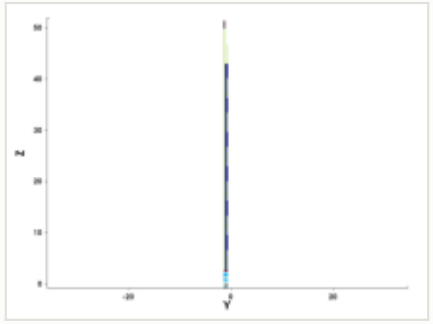

y cut at -1.035 µm

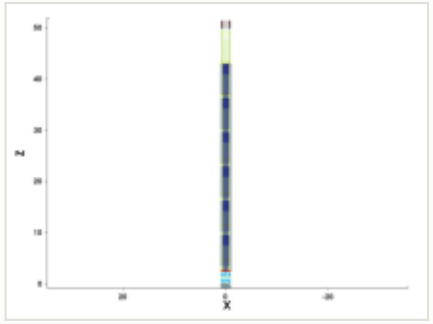

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

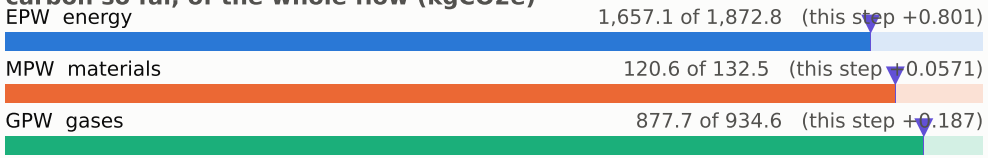

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

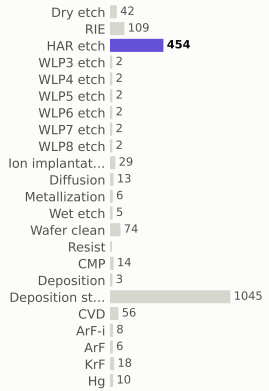

materials deposited (g)

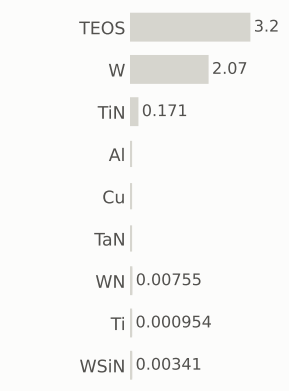

gases emitted (g)

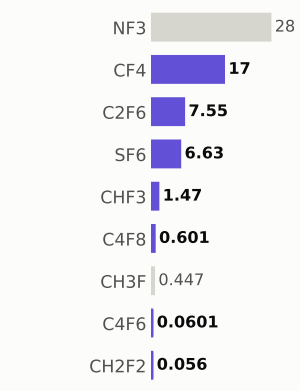

Step #25140.8054: HAR_etch

etch_noop · HAR_etch

1.04	2,656.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

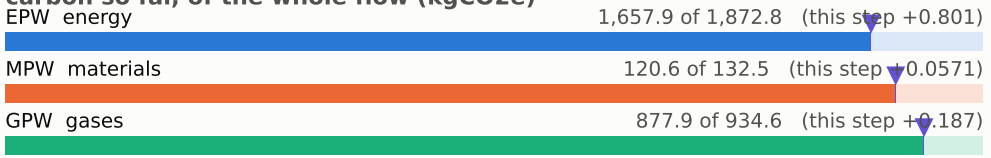

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

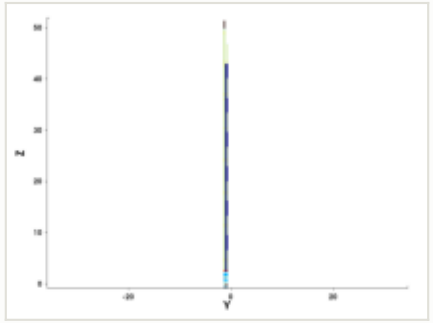

y cut at -1.035 µm

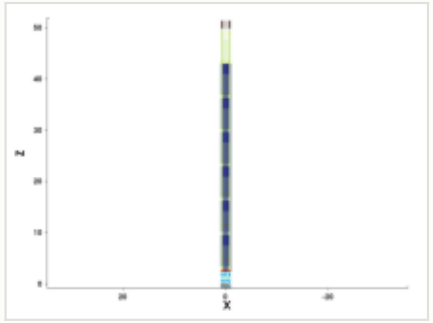

mask for this step

no mask for this step

steps by process area

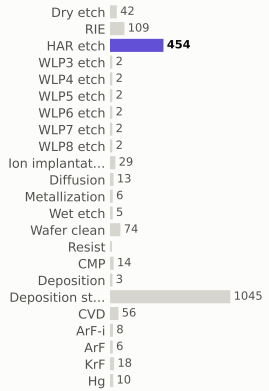

materials deposited (g)

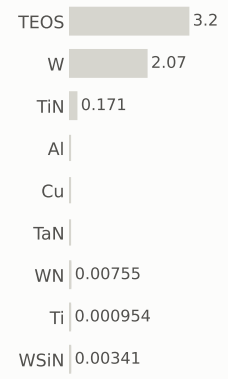

gases emitted (g)



Step #25140.8725: HAR_etch

etch_noop · HAR_etch

1.04	2,657.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

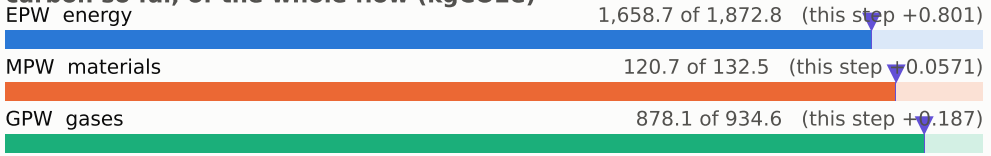

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

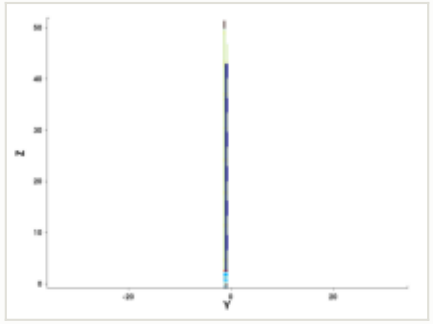

y cut at -1.035 µm

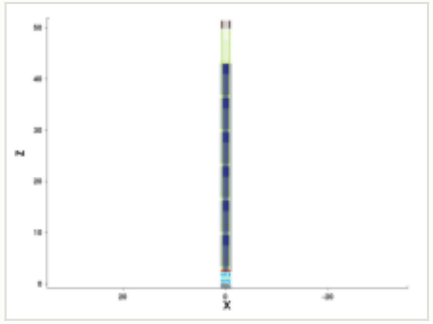

mask for this step

no mask for this step

steps by process area

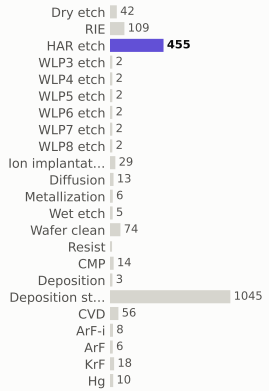

materials deposited (g)

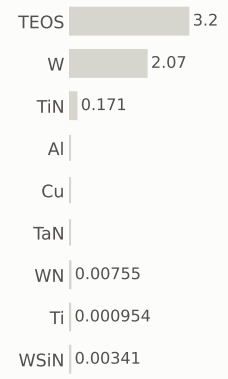

gases emitted (g)



Step #25140.9396: HAR_etch

etch_noop · HAR_etch

1.04	2,658.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

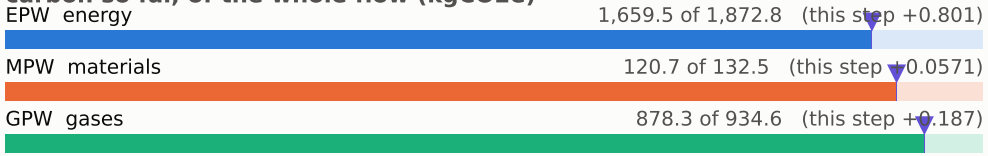

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

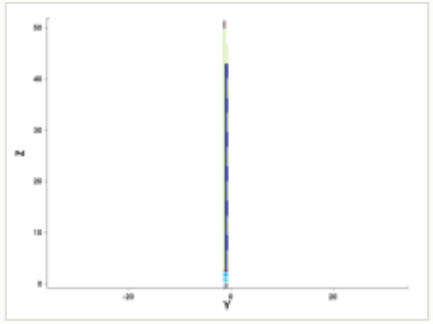

y cut at -1.035 µm

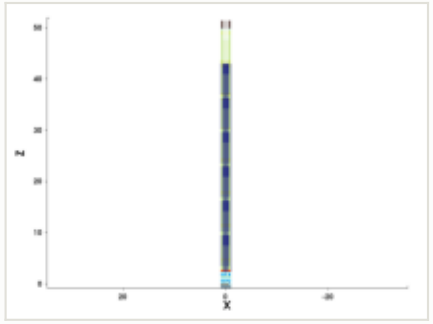

mask for this step

no mask for this step

steps by process area

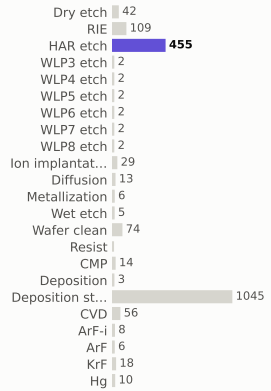

materials deposited (g)

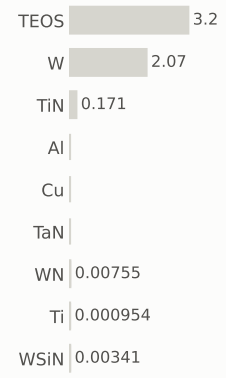

gases emitted (g)



Step #25141.0067: HAR_etch

etch_noop · HAR_etch

1.04	2,659.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

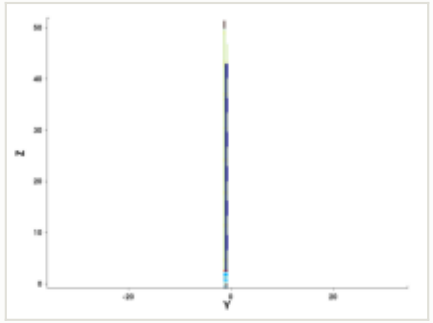

y cut at -1.035 µm

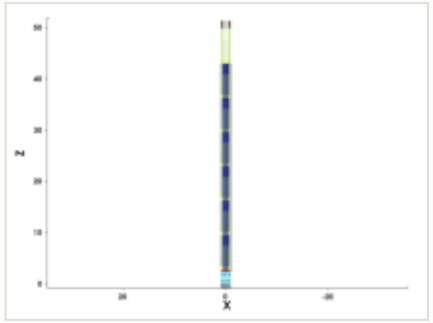

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

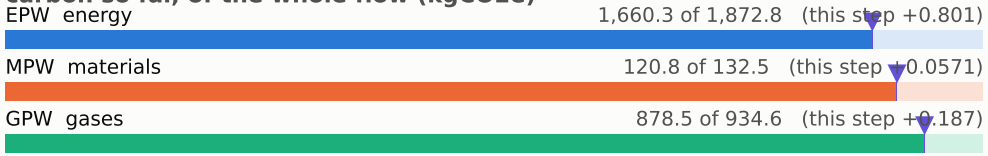

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

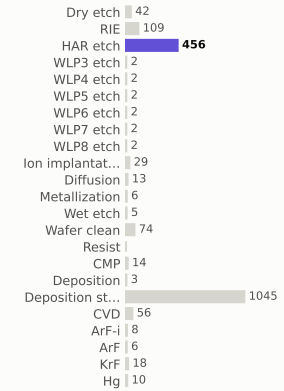

materials deposited (g)

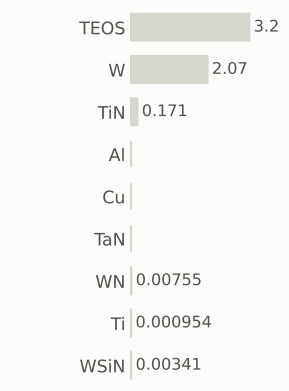

gases emitted (g)



Step #25141.0738: HAR_etch

etch_noop · HAR_etch

1.04	2,660.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

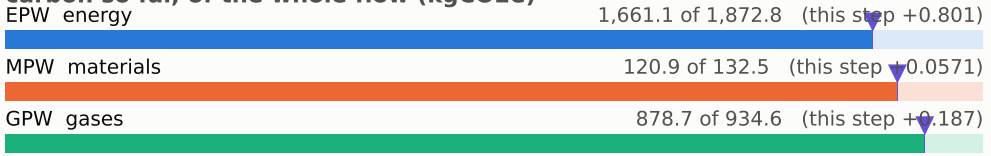

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

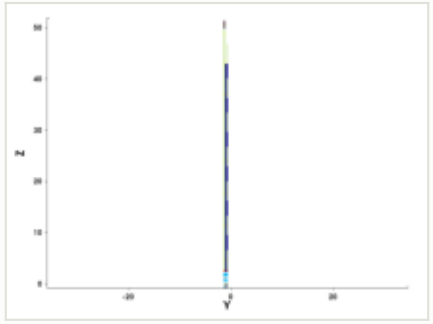

y cut at -1.035 µm

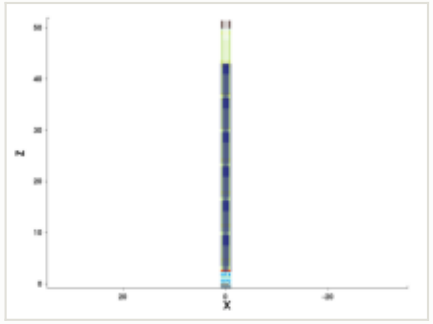

mask for this step

no mask for this step

steps by process area

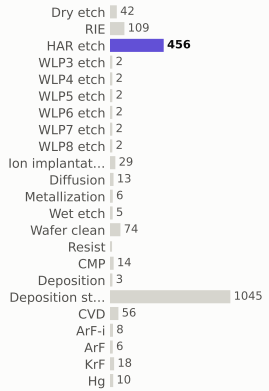

materials deposited (g)

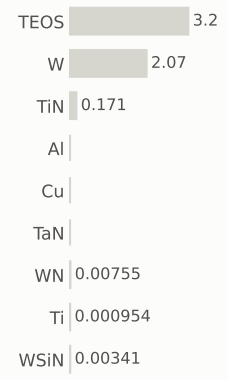

gases emitted (g)



Step #25141.1409: HAR_etch

etch_noop · HAR_etch

1.04	2,661.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

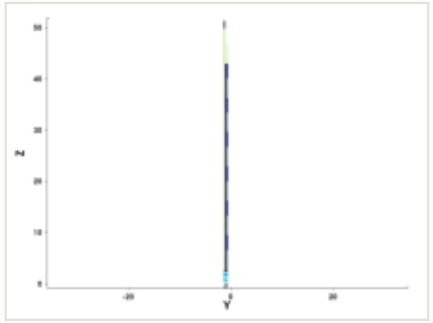

y cut at -1.035 µm

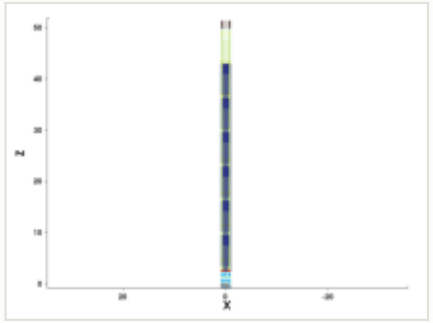

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

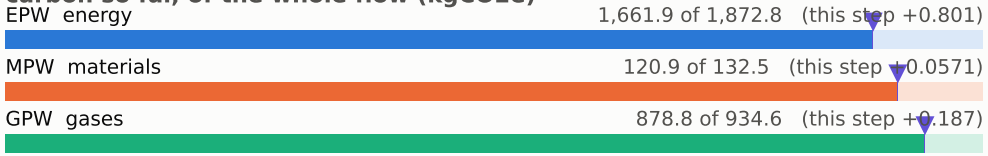

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

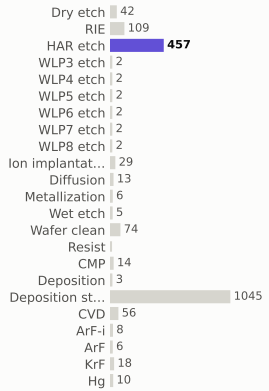

materials deposited (g)

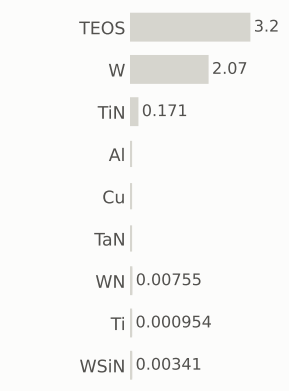

gases emitted (g)

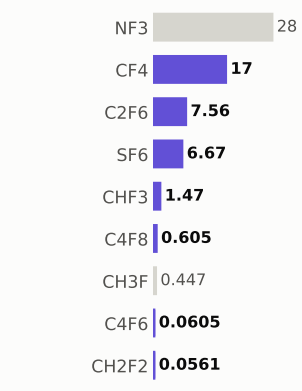

Step #25141.2081: HAR_etch

etch_noop · HAR_etch

1.04	2,662.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

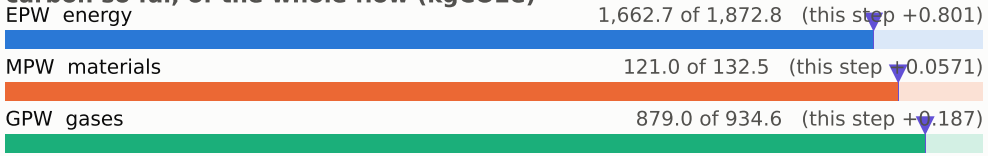

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

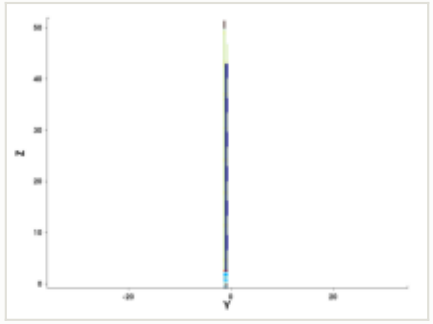

y cut at -1.035 µm

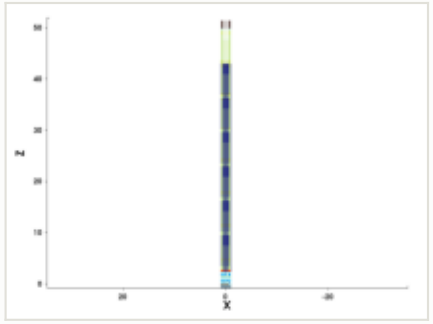

mask for this step

no mask for this step

steps by process area

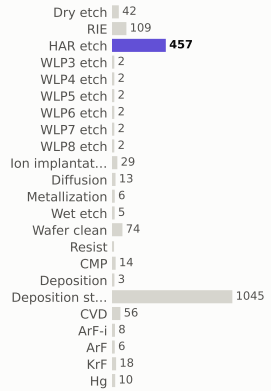

materials deposited (g)

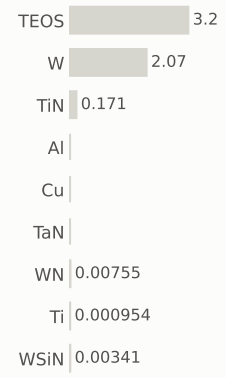

gases emitted (g)



Step #25141.2752: HAR_etch

etch_noop · HAR_etch

1.04	2,663.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

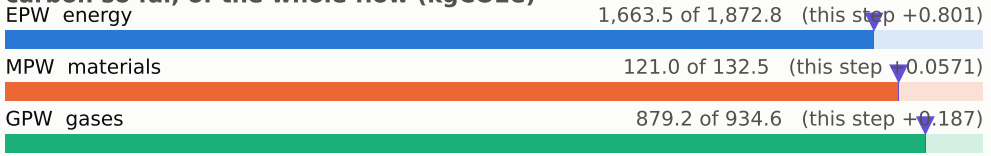

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

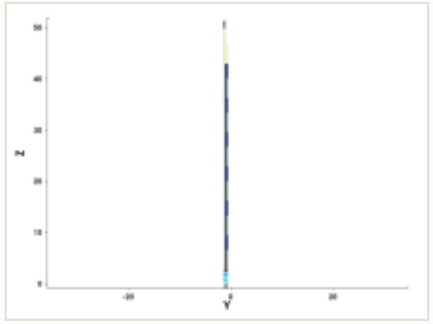

y cut at -1.035 µm

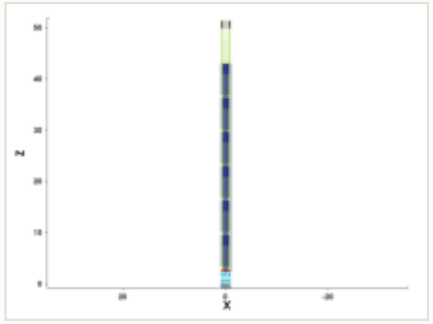

mask for this step

no mask for this step

steps by process area

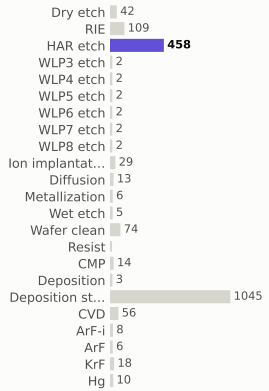

materials deposited (g)

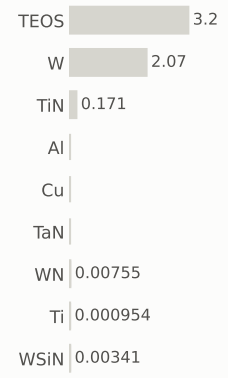

gases emitted (g)



Step #25141.3423: HAR_etch

etch_noop · HAR_etch

1.04	2,664.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

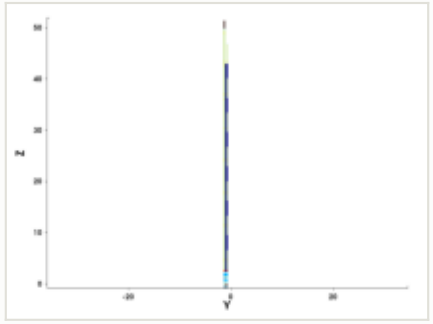

y cut at -1.035 µm

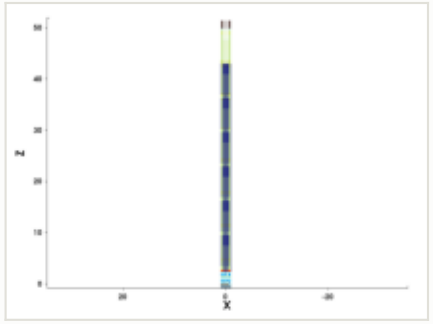

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

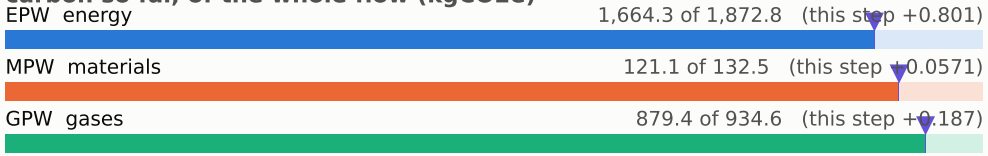

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

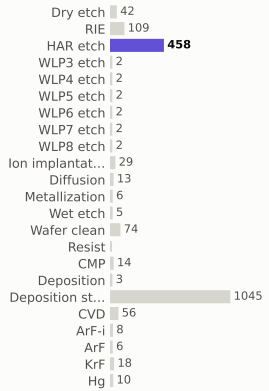

materials deposited (g)

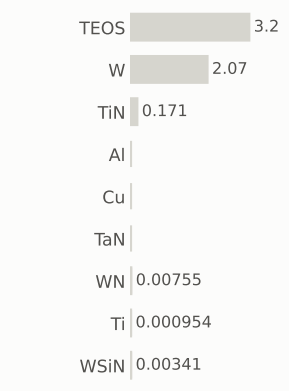

gases emitted (g)

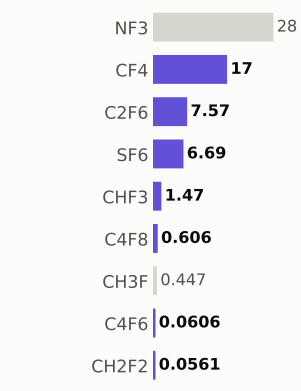

Step #25141.4094: HAR_etch

etch_noop · HAR_etch

1.04	2,665.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

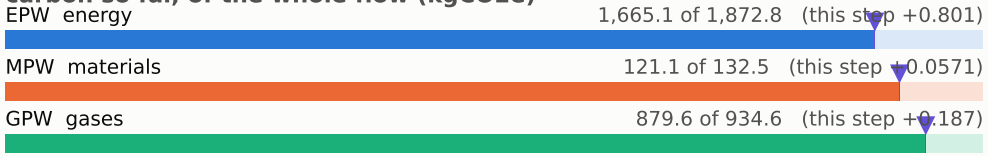

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

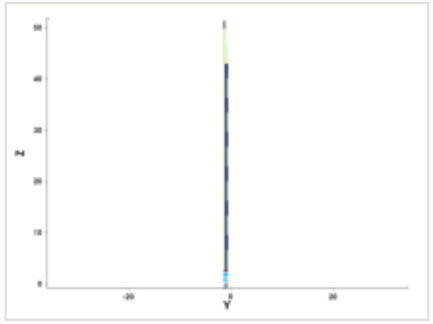

y cut at -1.035 µm

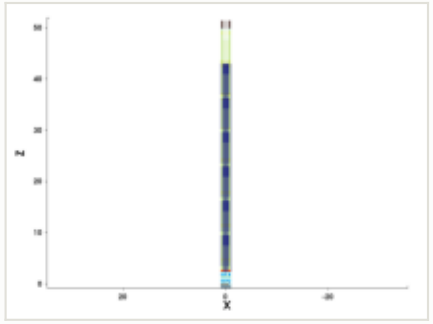

mask for this step

no mask for this step

steps by process area

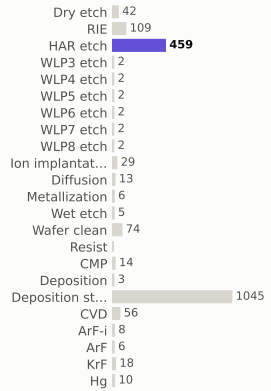

materials deposited (g)

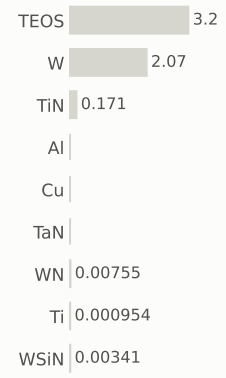

gases emitted (g)



Step #25141.4765: HAR_etch

etch_noop · HAR_etch

1.04	2,666.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

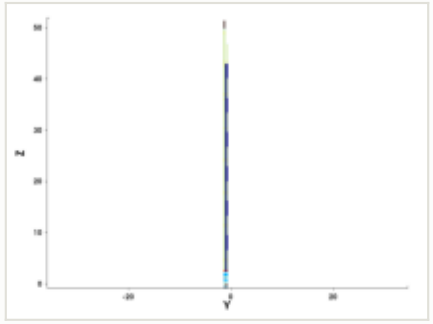

y cut at -1.035 µm

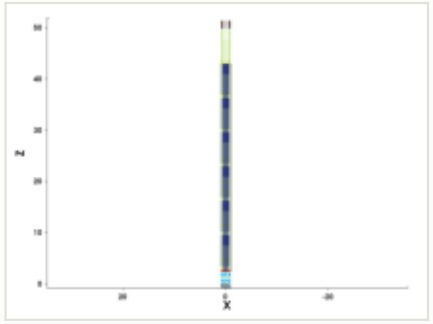

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

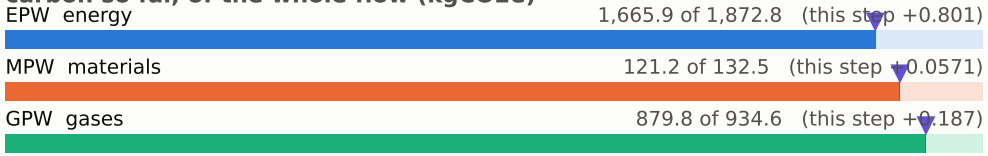

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

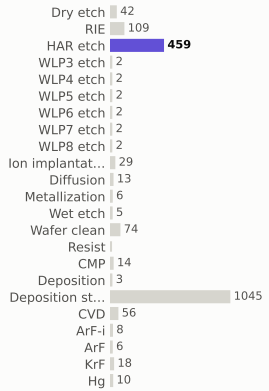

materials deposited (g)

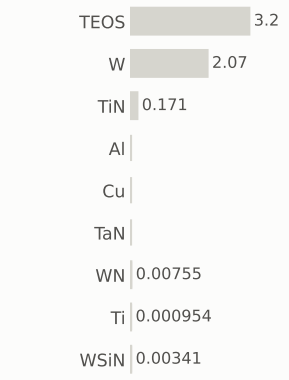

gases emitted (g)



Step #25141.5436: HAR_etch

etch_noop · HAR_etch

1.04	2,667.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

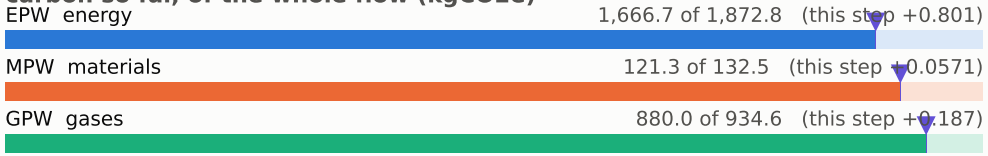

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

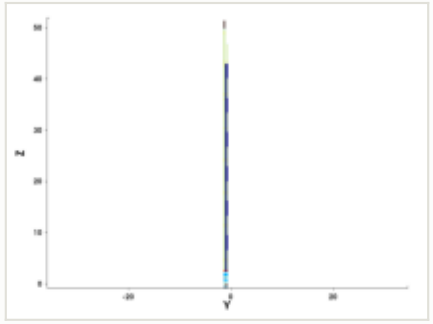

y cut at -1.035 µm

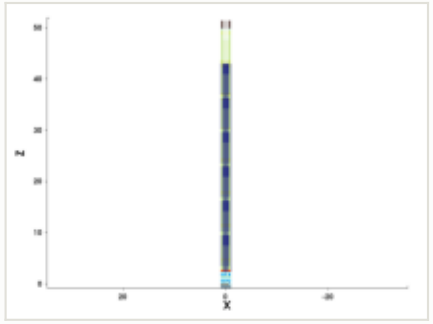

mask for this step

no mask for this step

steps by process area

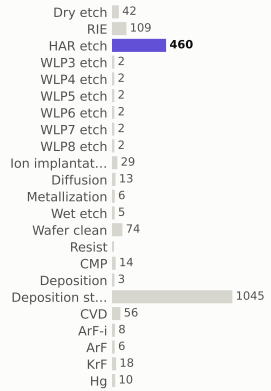

materials deposited (g)

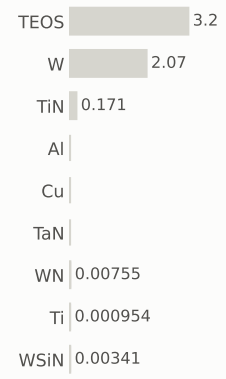

gases emitted (g)



Step #25141.6107: HAR_etch

etch_noop · HAR_etch

1.04	2,668.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

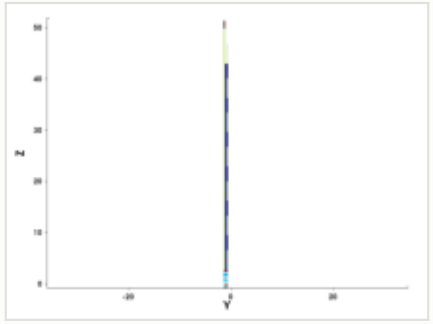

y cut at -1.035 µm

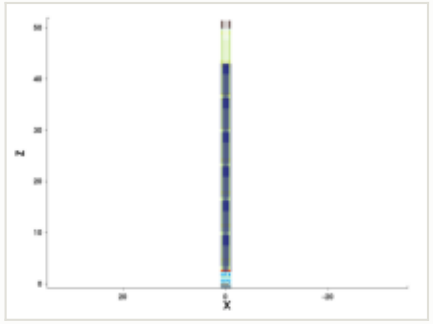

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

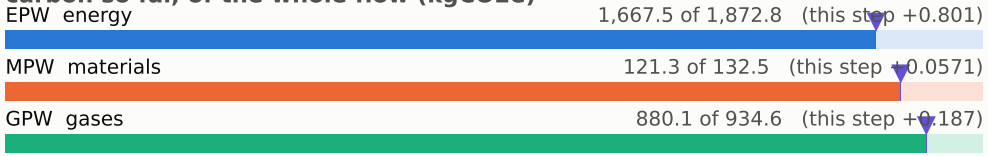

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

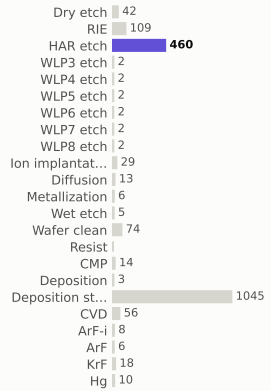

materials deposited (g)

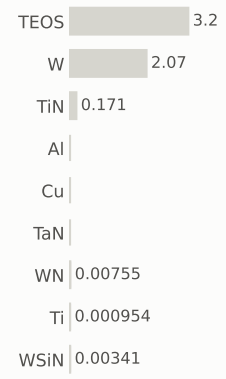

gases emitted (g)



Step #25141.6779: HAR_etch

etch_noop · HAR_etch

1.04	2,670.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

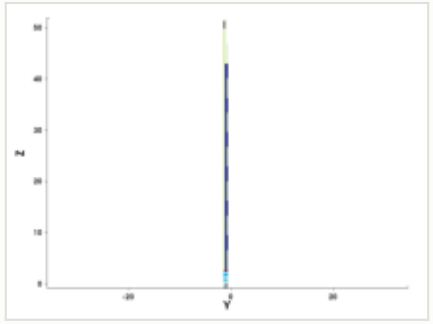

y cut at -1.035 µm

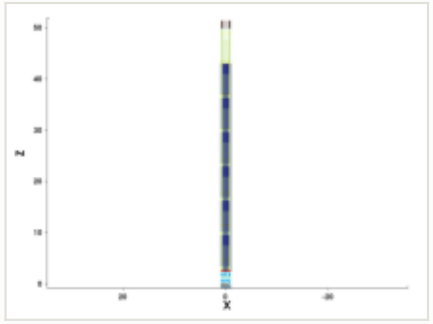

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

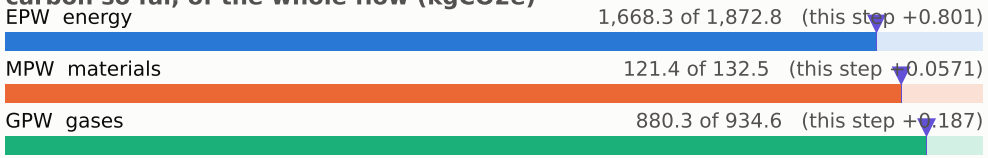

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

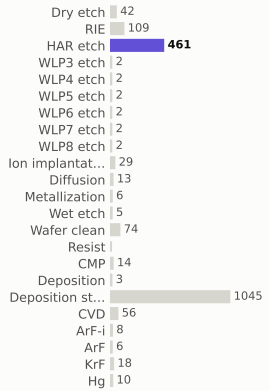

materials deposited (g)

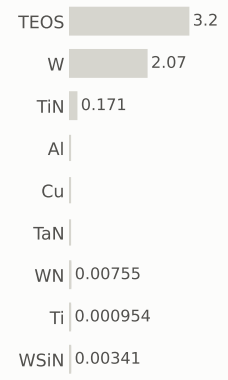

gases emitted (g)



Step #25141.745: HAR_etch

etch_noop · HAR_etch

1.04	2,671.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

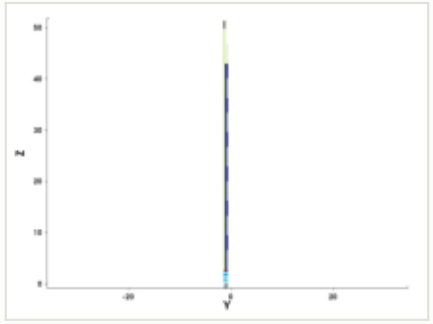

y cut at -1.035 µm

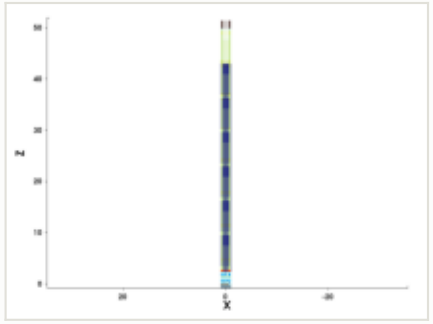

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

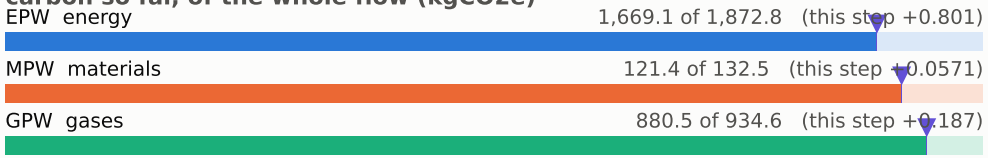

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

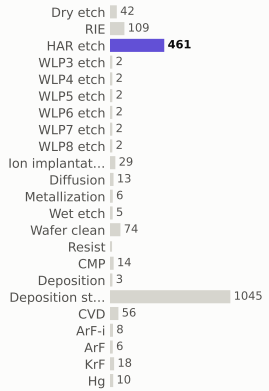

materials deposited (g)

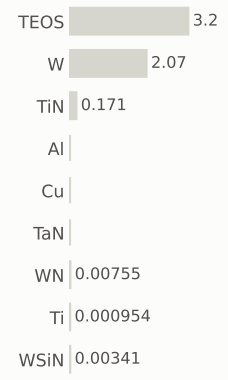

gases emitted (g)



Step #25141.8121: HAR_etch

etch_noop · HAR_etch

1.04	2,672.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

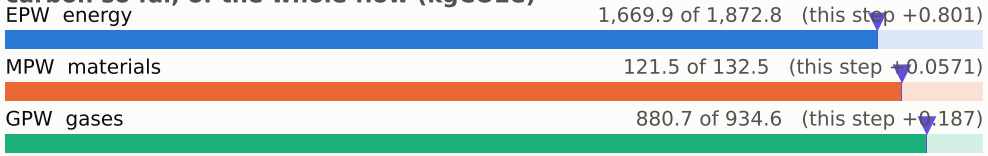

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

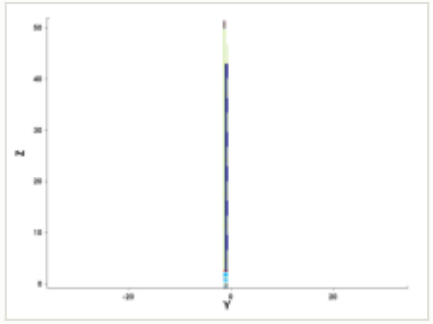

y cut at -1.035 µm

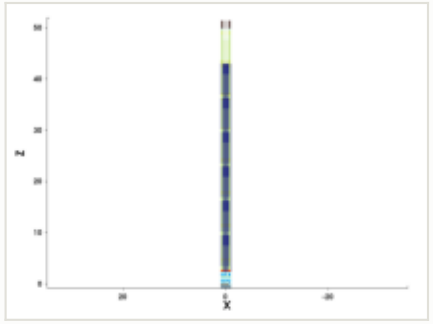

mask for this step

no mask for this step

steps by process area

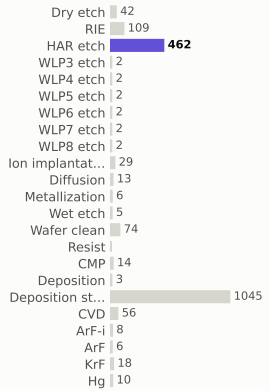

materials deposited (g)

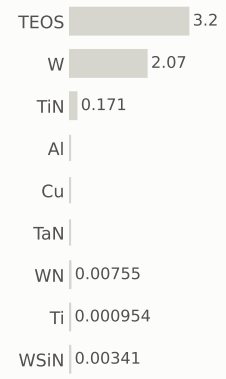

gases emitted (g)



Step #25141.8792: HAR_etch

etch_noop · HAR_etch

1.04	2,673.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

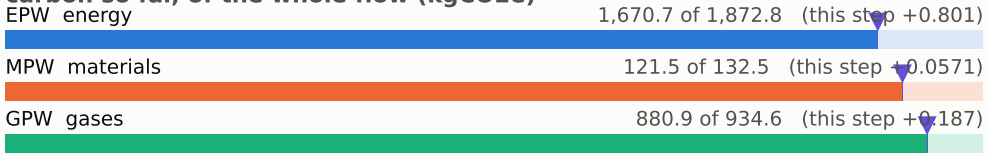

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

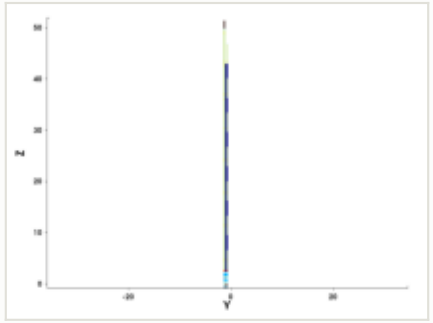

y cut at -1.035 µm

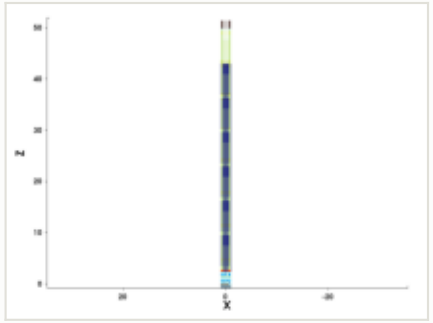

mask for this step

no mask for this step

steps by process area

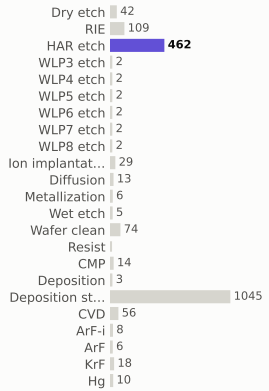

materials deposited (g)

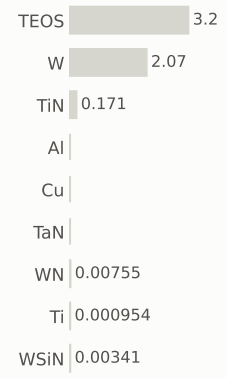

gases emitted (g)



Step #25141.9463: HAR_etch

etch_noop · HAR_etch

1.04	2,674.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

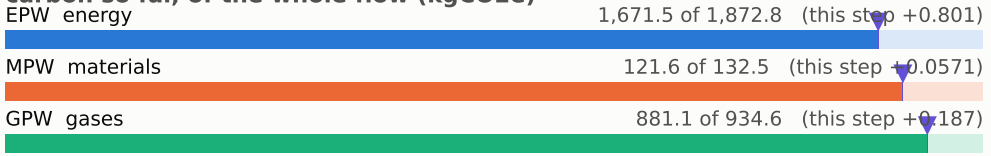

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

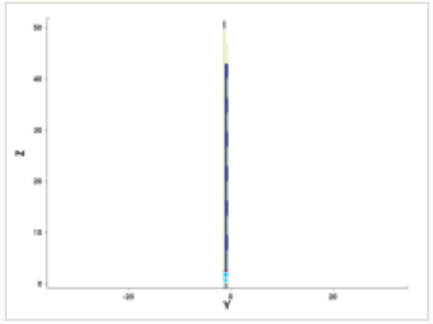

y cut at -1.035 µm

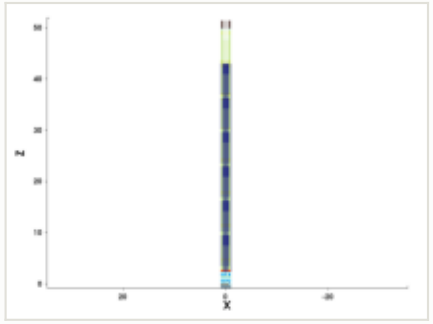

mask for this step

no mask for this step

steps by process area

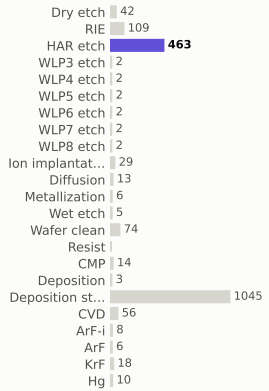

materials deposited (g)

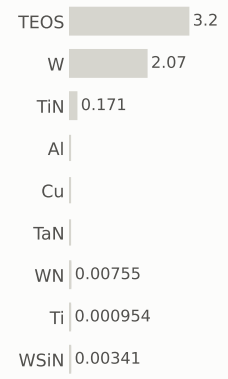

gases emitted (g)



Step #25142.0134: HAR_etch

etch_noop · HAR_etch

1.04	2,675.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

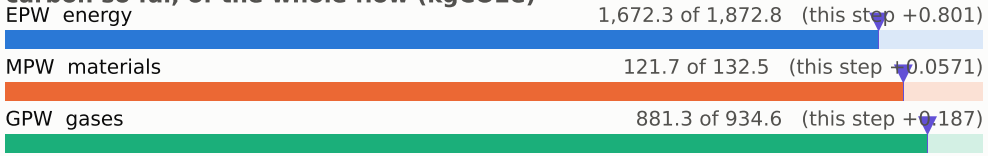

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

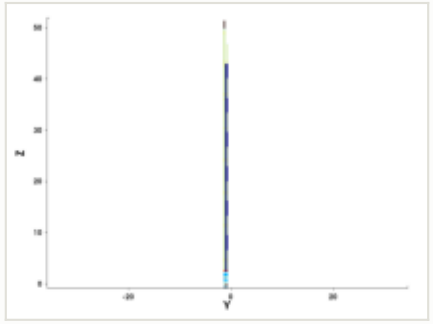

y cut at -1.035 µm

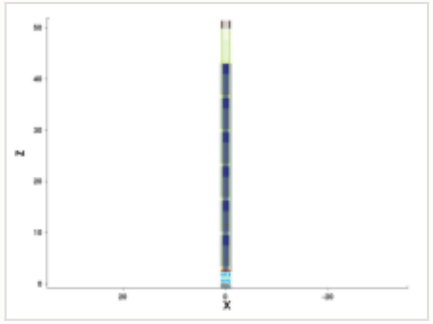

mask for this step

no mask for this step

steps by process area

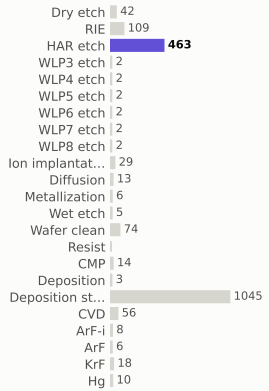

materials deposited (g)

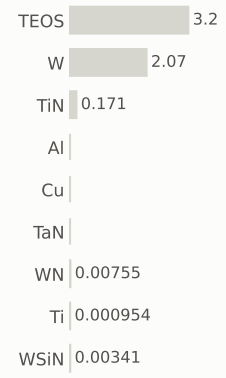

gases emitted (g)



Step #25142.0805: HAR_etch

etch_noop · HAR_etch

1.04	2,676.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

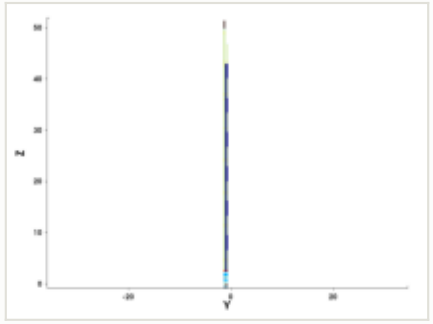

y cut at -1.035 µm

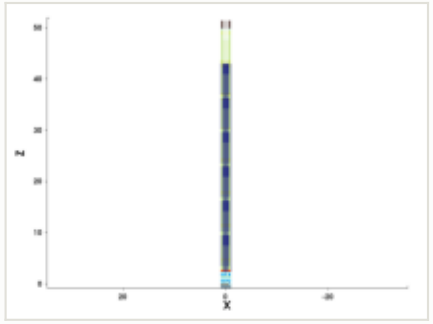

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

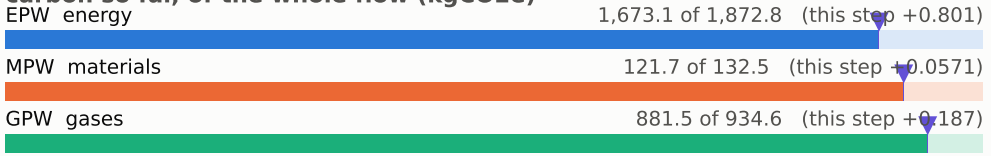

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

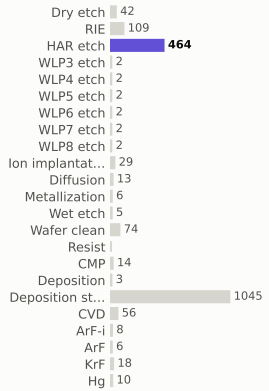

materials deposited (g)

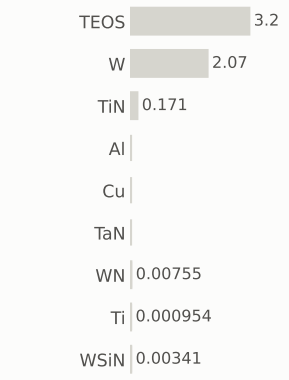

gases emitted (g)



Step #25142.1477: HAR_etch

etch_noop · HAR_etch

1.04	2,677.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

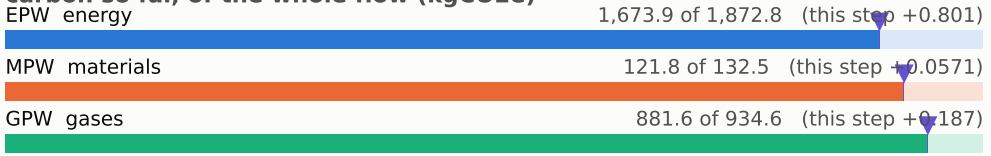

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

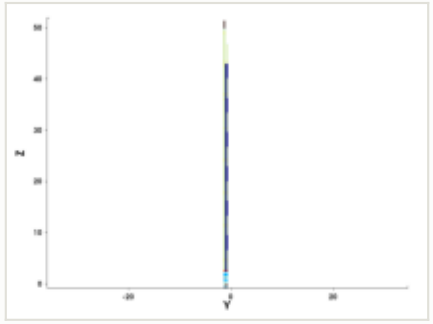

y cut at -1.035 µm

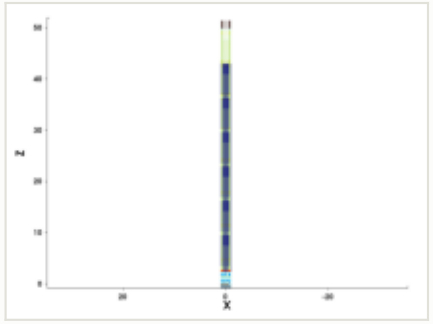

mask for this step

no mask for this step

steps by process area

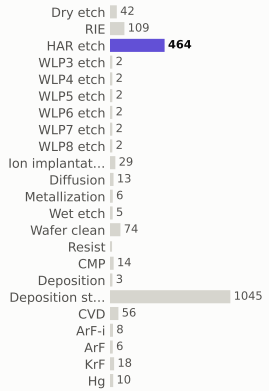

materials deposited (g)

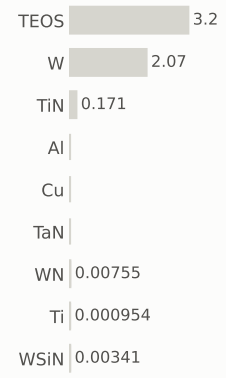

gases emitted (g)



Step #25142.2148: HAR_etch

etch_noop · HAR_etch

1.04	2,678.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

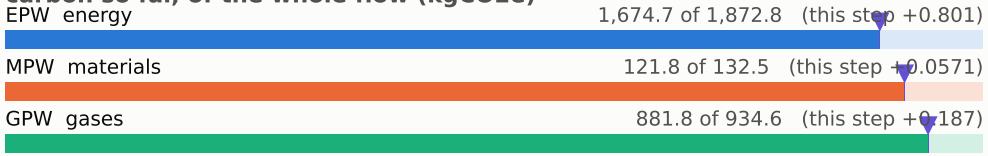

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

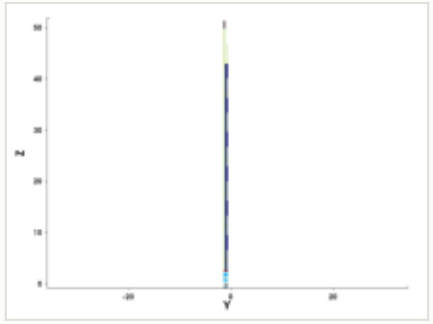

y cut at -1.035 µm

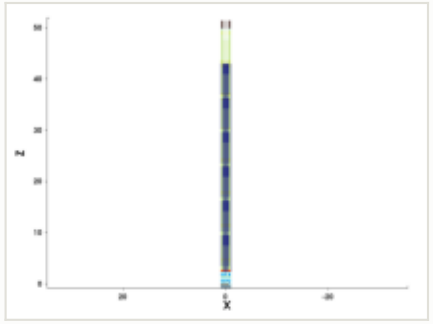

mask for this step

no mask for this step

steps by process area

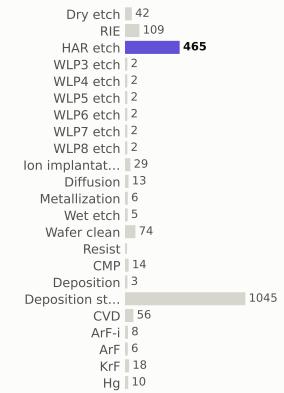

materials deposited (g)

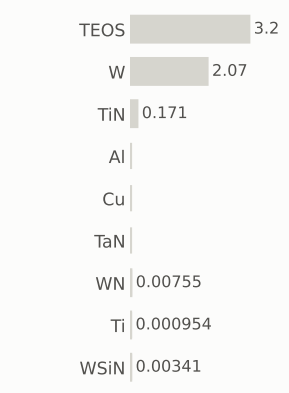

gases emitted (g)



Step #25142.2819: HAR_etch

etch_noop · HAR_etch

1.04	2,679.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

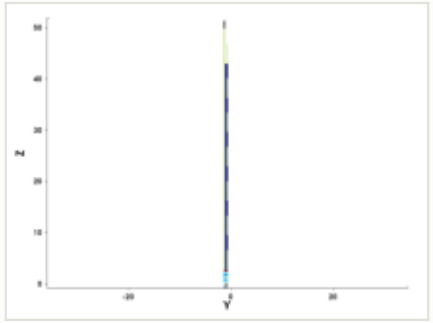

y cut at -1.035 µm

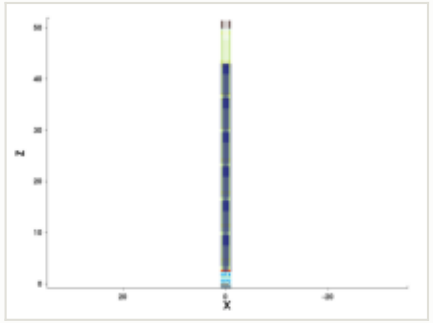

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

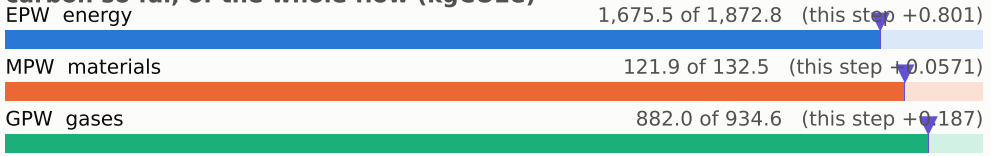

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

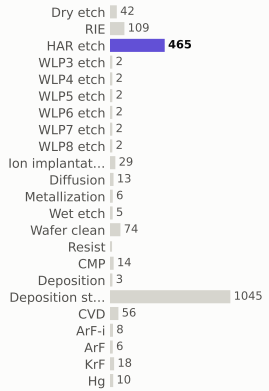

materials deposited (g)



gases emitted (g)



Step #25142.349: HAR_etch

etch_noop · HAR_etch

1.04	2,680.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

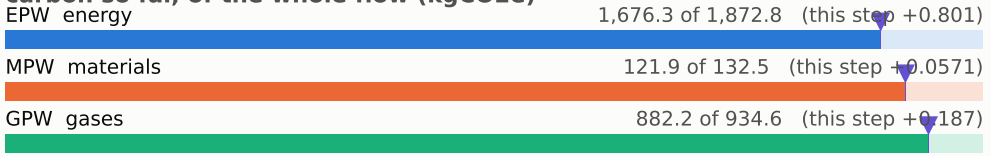

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

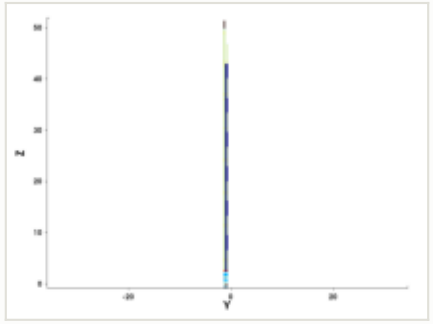

y cut at -1.035 µm

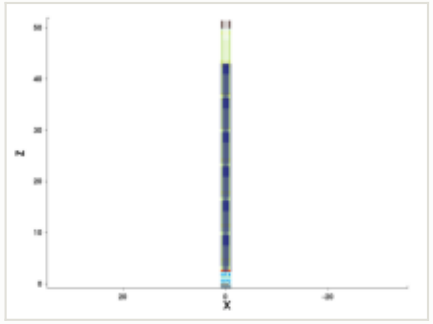

mask for this step

no mask for this step

steps by process area

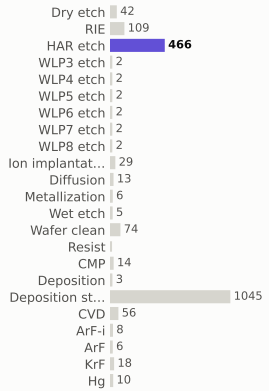

materials deposited (g)

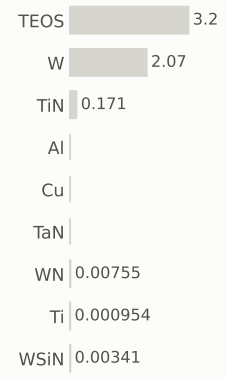

gases emitted (g)



Step #25142.4161: HAR_etch

etch_noop · HAR_etch

1.04	2,681.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

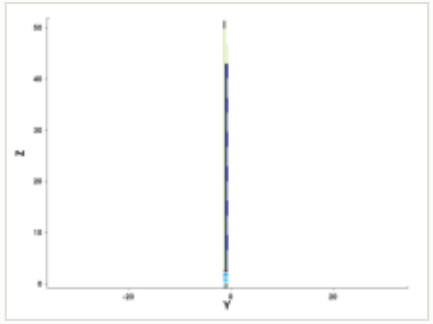

y cut at -1.035 µm

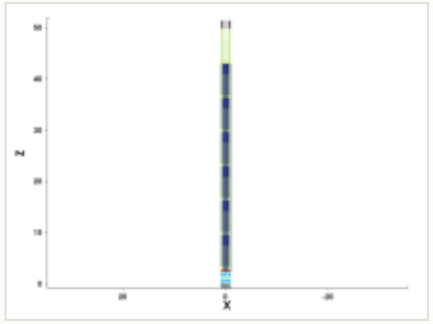

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

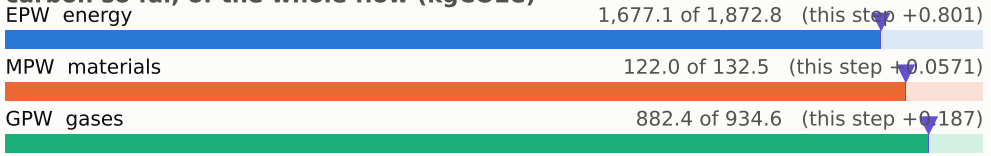

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

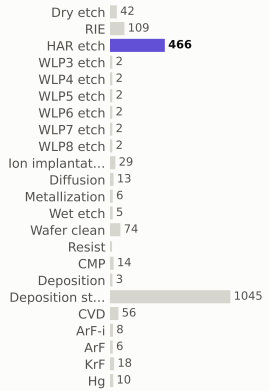

materials deposited (g)

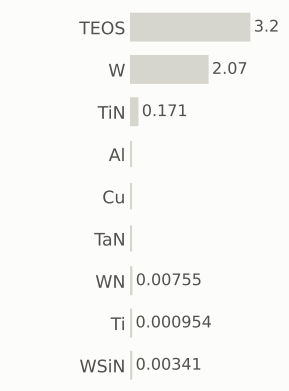

gases emitted (g)



Step #25142.4832: HAR_etch

etch_noop · HAR_etch

1.04	2,682.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

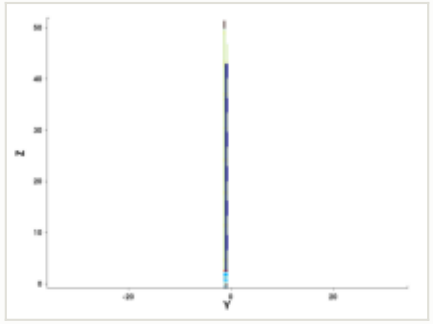

y cut at -1.035 µm

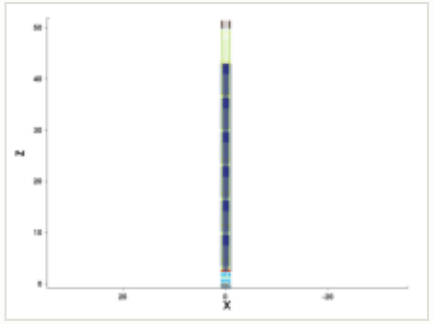

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

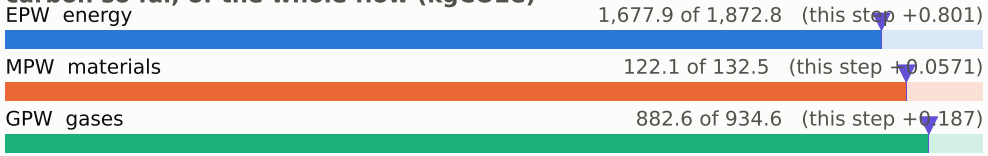

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

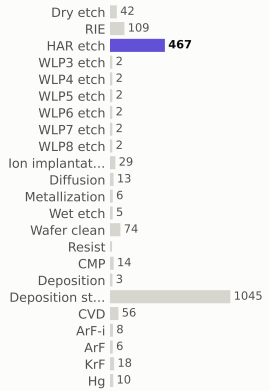

materials deposited (g)

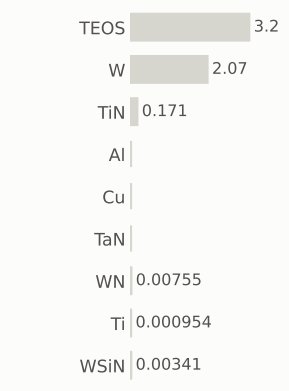

gases emitted (g)



Step #25142.5503: HAR_etch

etch_noop · HAR_etch

1.04	2,683.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

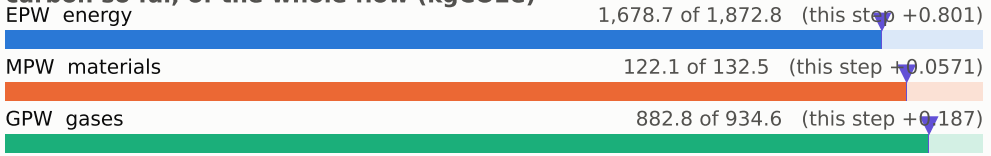

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

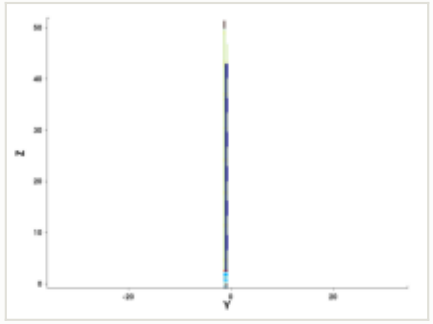

y cut at -1.035 µm

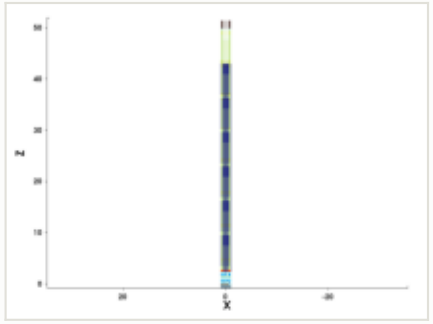

mask for this step

no mask for this step

steps by process area

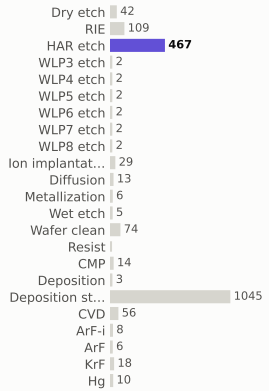

materials deposited (g)

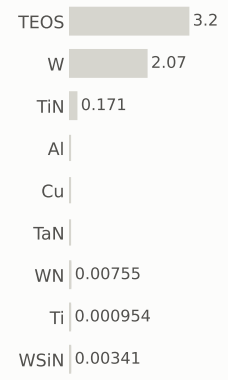

gases emitted (g)



Step #25142.6174: HAR_etch

etch_noop · HAR_etch

1.04	2,684.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

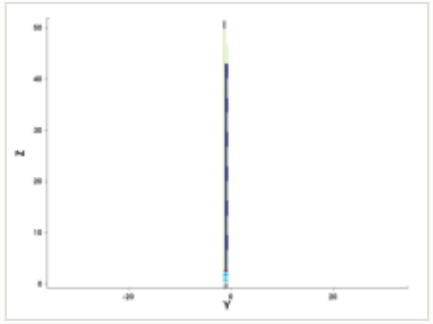

y cut at -1.035 µm

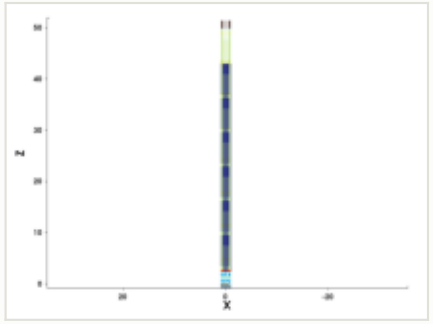

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

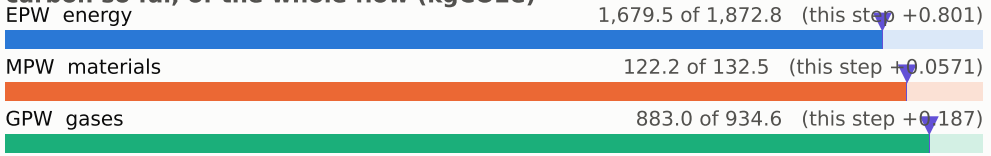

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

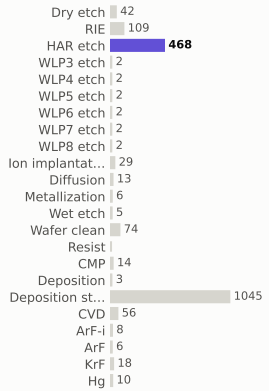

materials deposited (g)

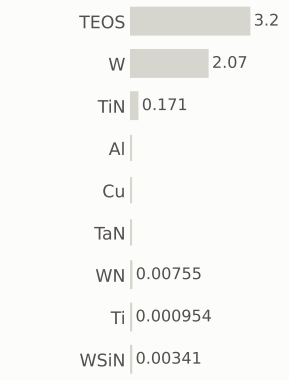

gases emitted (g)



Step #25142.6846: HAR_etch

etch_noop · HAR_etch

1.04	2,685.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

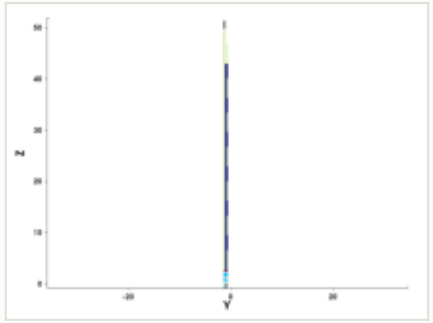

y cut at -1.035 µm

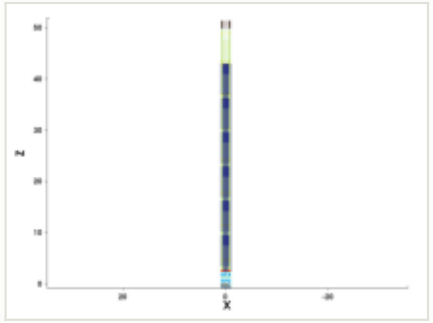

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

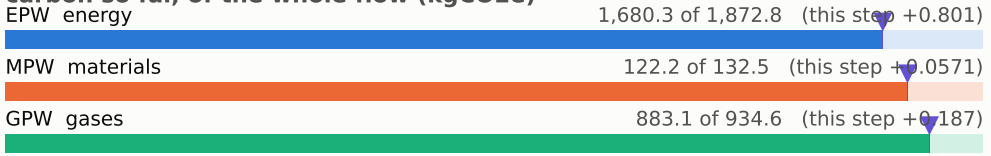

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

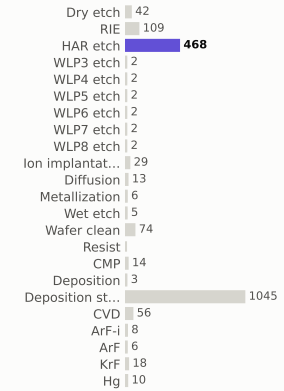

materials deposited (g)

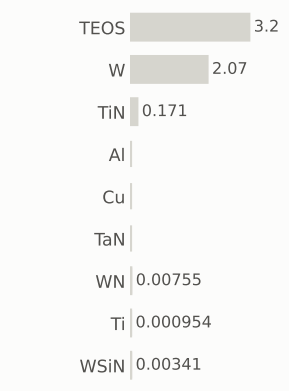

gases emitted (g)

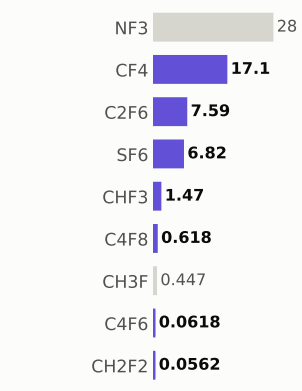

Step #25142.7517: HAR_etch

etch_noop · HAR_etch

1.04	2,686.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

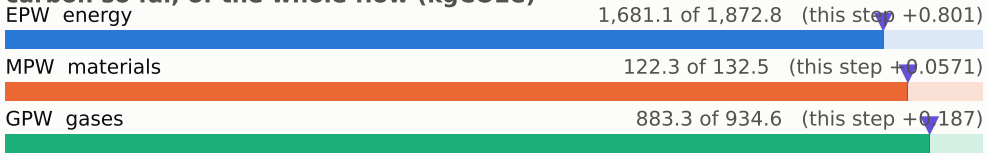

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

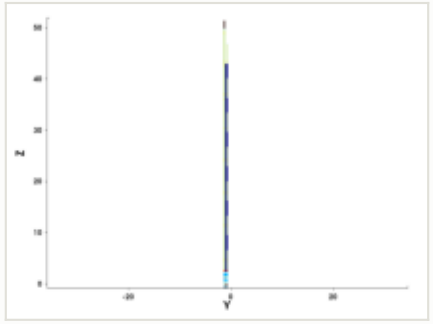

y cut at -1.035 µm

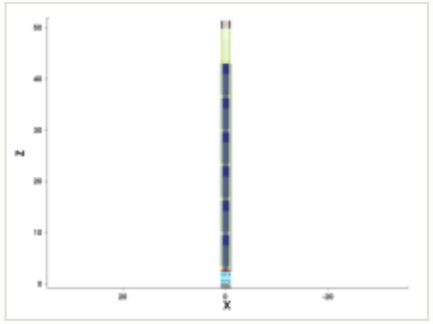

mask for this step

no mask for this step

steps by process area

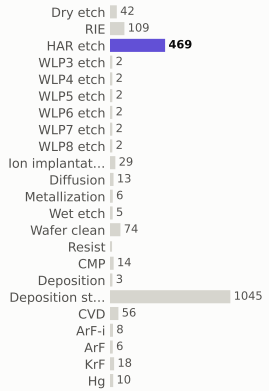

materials deposited (g)

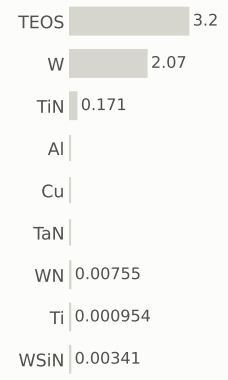

gases emitted (g)



Step #25142.8188: HAR_etch

etch_noop · HAR_etch

1.04	2,687.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

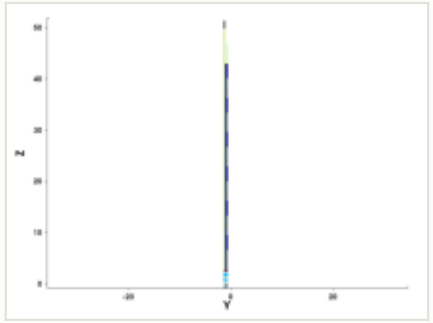

y cut at -1.035 µm

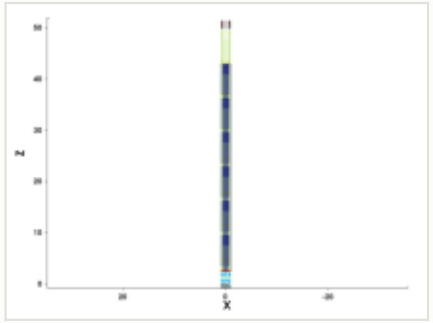

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

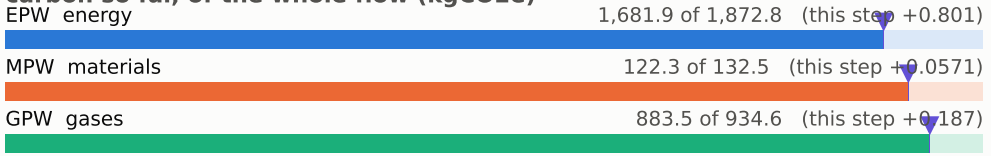

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

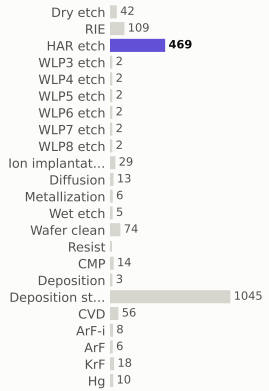

materials deposited (g)

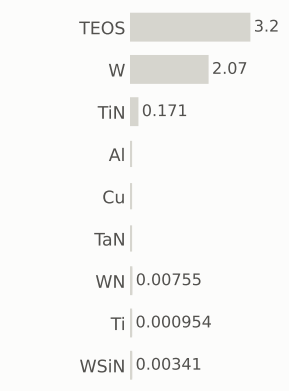

gases emitted (g)

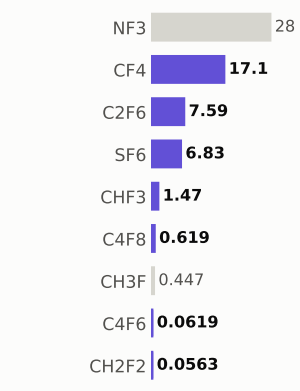

Step #25142.8859: HAR_etch

etch_noop · HAR_etch

1.04	2,688.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

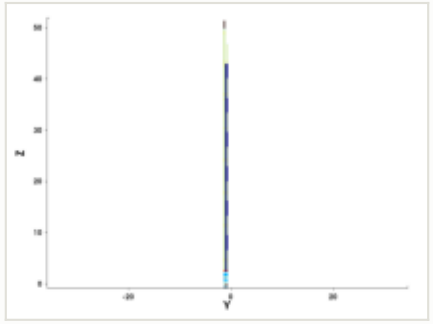

y cut at -1.035 µm

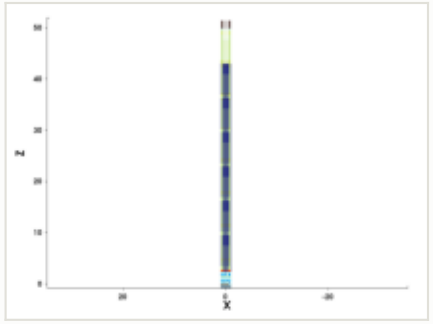

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

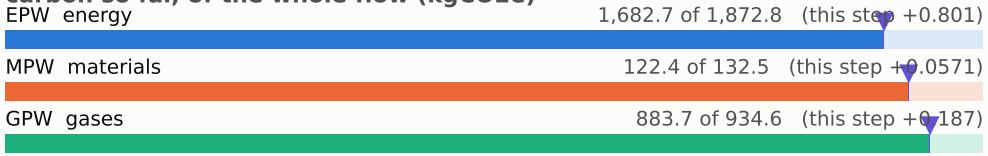

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

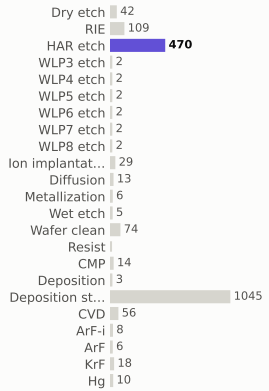

materials deposited (g)

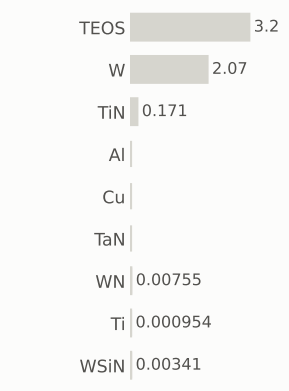

gases emitted (g)

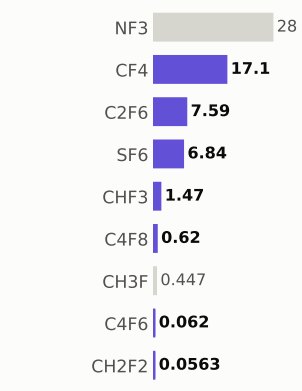

Step #25142.953: HAR_etch

etch_noop · HAR_etch

1.04	2,689.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

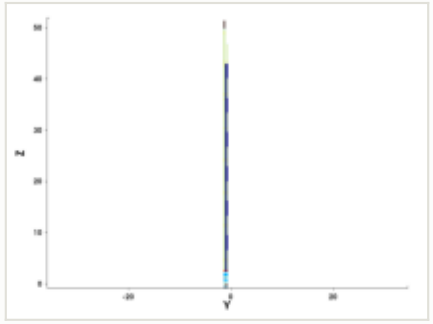

y cut at -1.035 µm

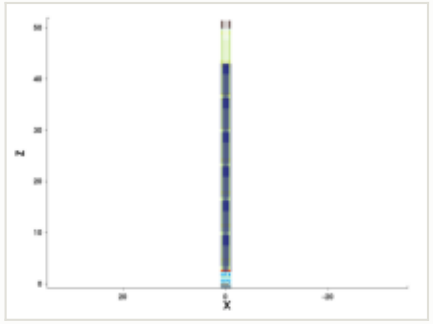

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

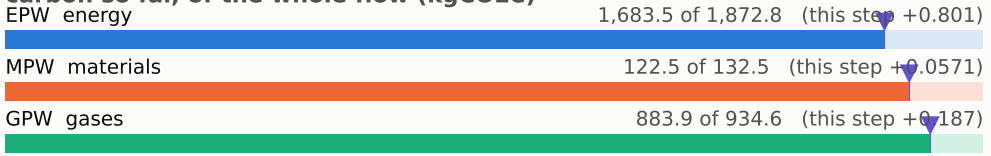

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

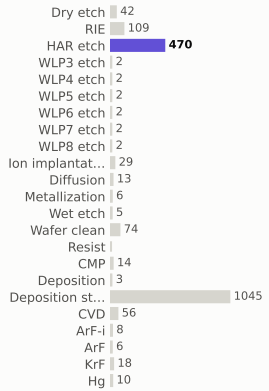

materials deposited (g)

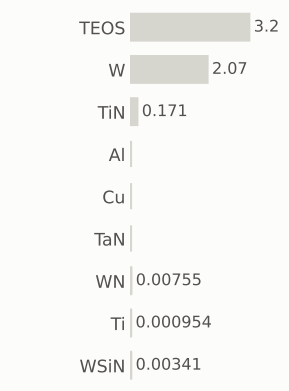

gases emitted (g)

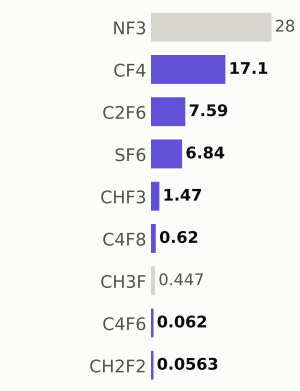

Step #25143.0201: HAR_etch

etch_noop · HAR_etch

1.04	2,690.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

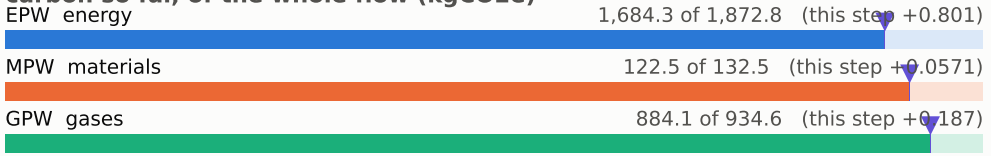

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

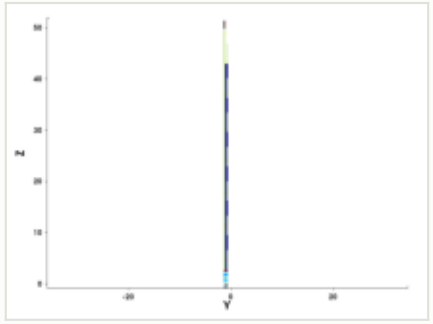

y cut at -1.035 µm

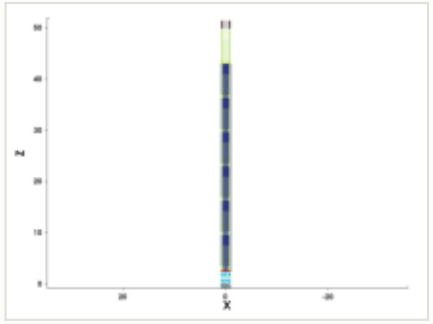

mask for this step

no mask for this step

steps by process area

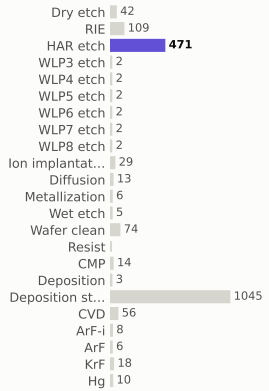

materials deposited (g)

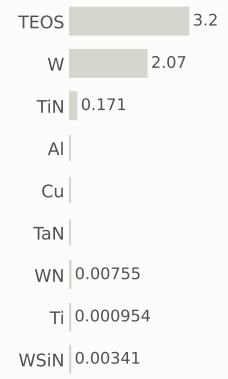

gases emitted (g)



Step #25143.0872: HAR_etch

etch_noop · HAR_etch

1.04	2,691.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

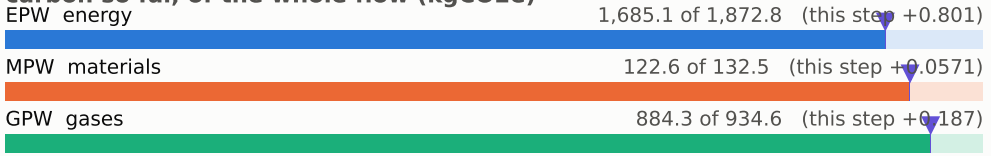

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

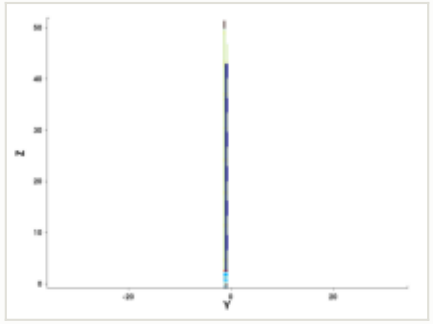

y cut at -1.035 µm

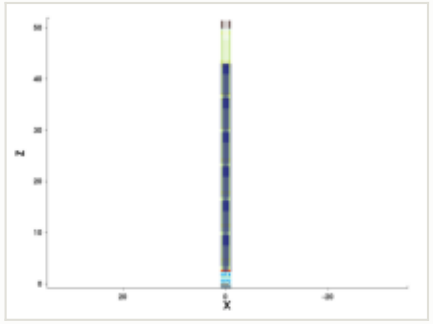

mask for this step

no mask for this step

steps by process area

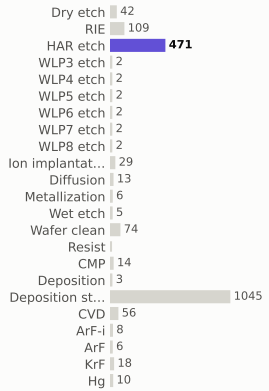

materials deposited (g)

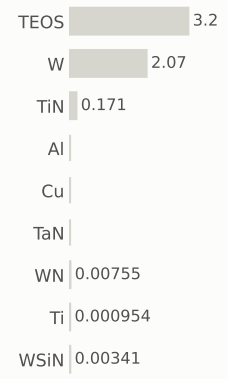

gases emitted (g)



Step #25143.1544: HAR_etch

etch_noop · HAR_etch

1.04	2,693.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

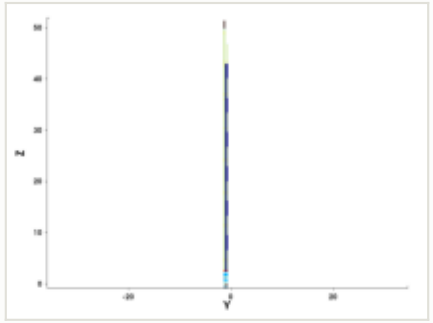

y cut at -1.035 µm

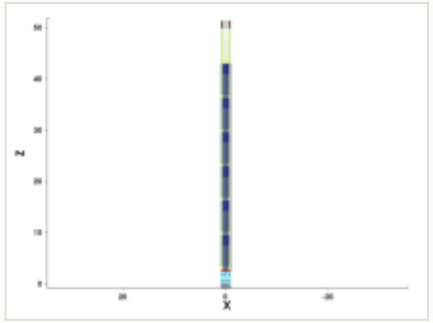

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

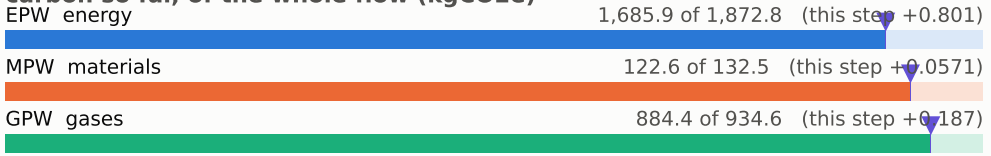

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

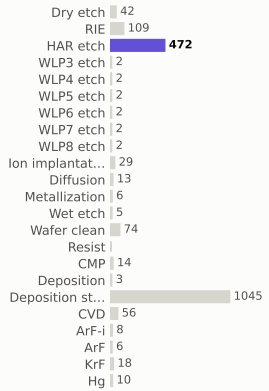

materials deposited (g)

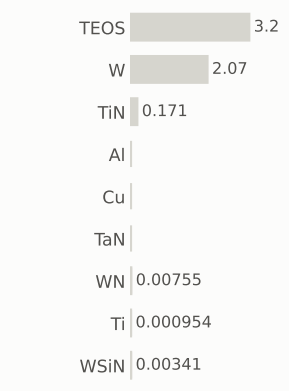

gases emitted (g)

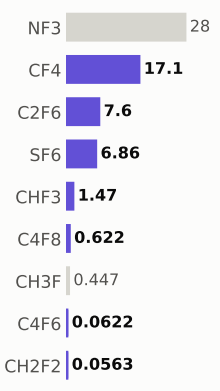

Step #25143.2215: HAR_etch

etch_noop · HAR_etch

1.04	2,694.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

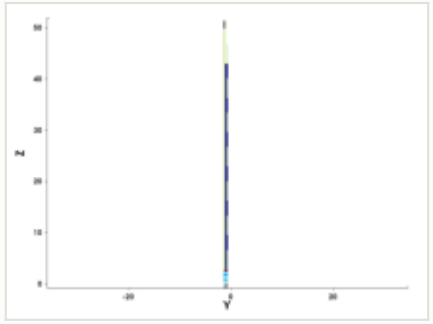

y cut at -1.035 µm

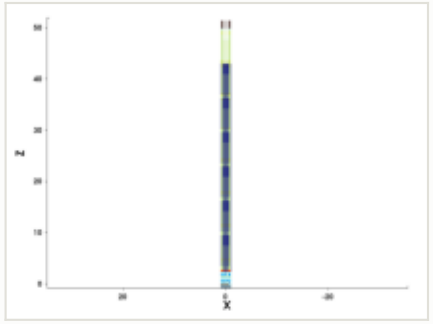

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

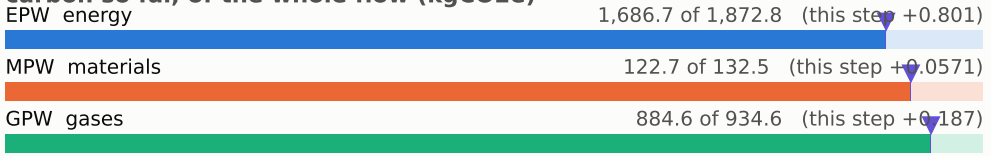

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

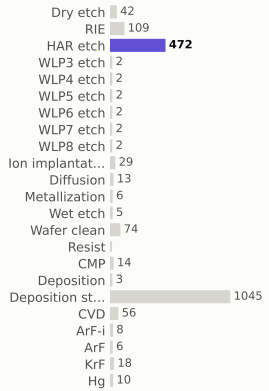

materials deposited (g)

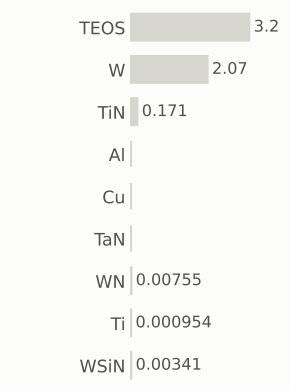

gases emitted (g)



Step #25143.2886: HAR_etch

etch_noop · HAR_etch

1.04	2,695.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

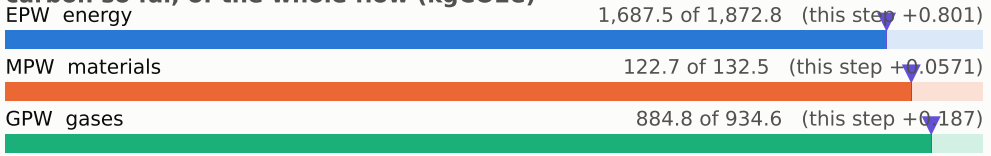

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

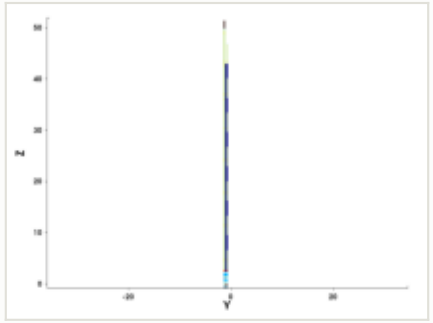

y cut at -1.035 µm

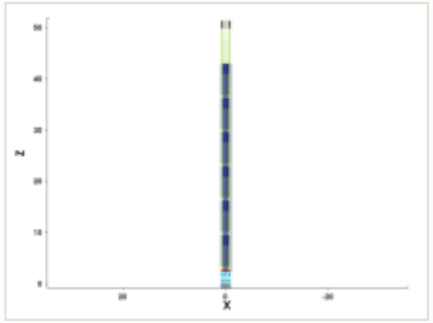

mask for this step

no mask for this step

steps by process area

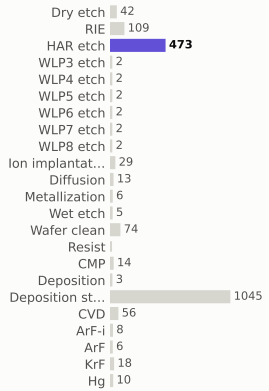

materials deposited (g)

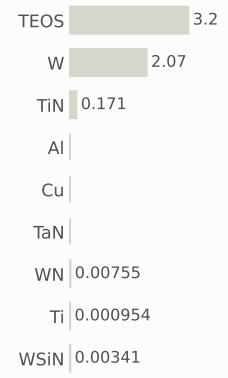

gases emitted (g)



Step #25143.3557: HAR_etch

etch_noop · HAR_etch

1.04	2,696.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

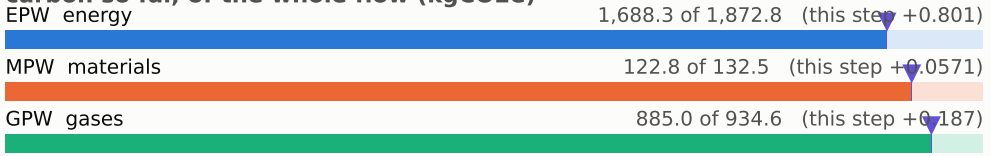

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

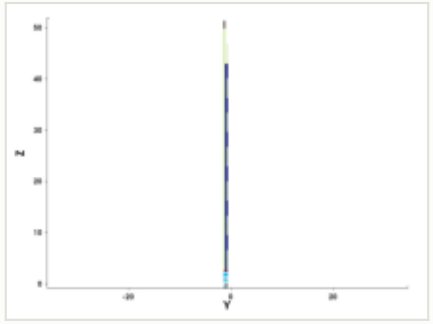

y cut at -1.035 µm

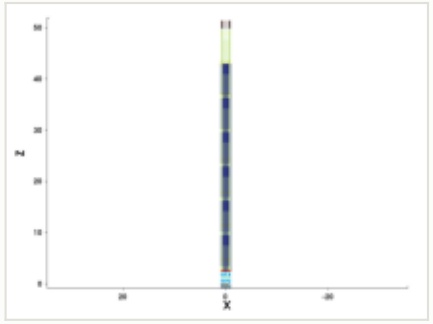

mask for this step

no mask for this step

steps by process area

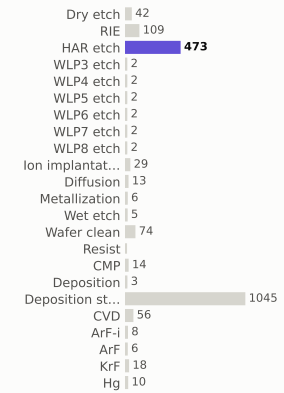

materials deposited (g)

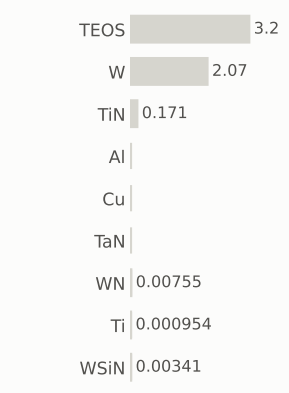

gases emitted (g)



Step #25143.4228: HAR_etch

etch_noop · HAR_etch

1.04	2,697.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

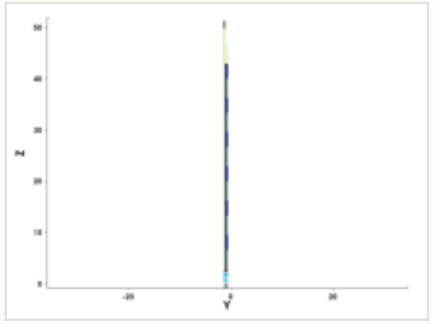

y cut at -1.035 µm

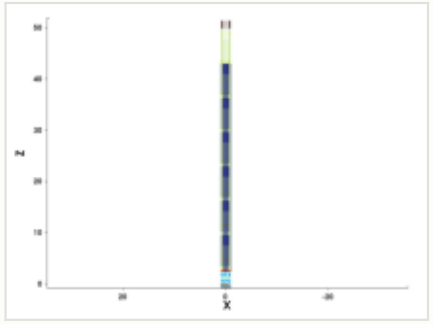

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

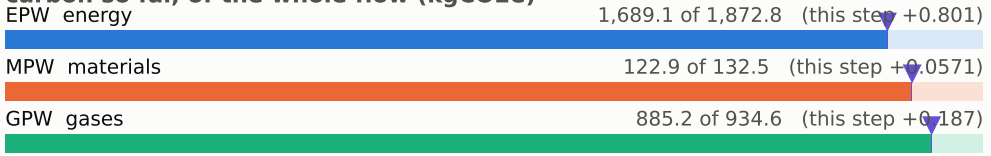

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

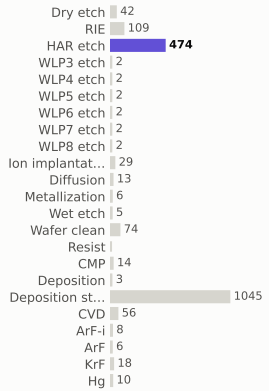

materials deposited (g)

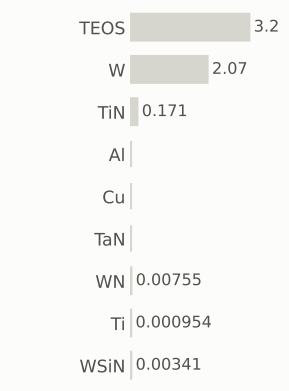

gases emitted (g)

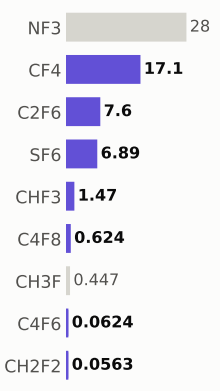

Step #25143.4899: HAR_etch

etch_noop · HAR_etch

1.04	2,698.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

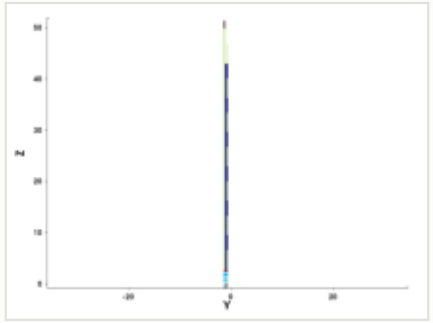

y cut at -1.035 µm

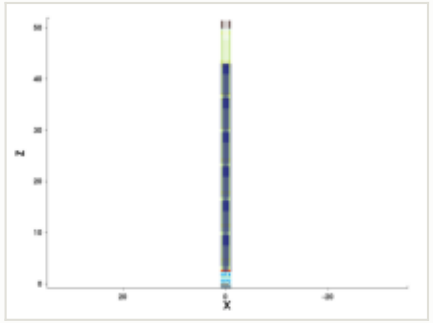

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

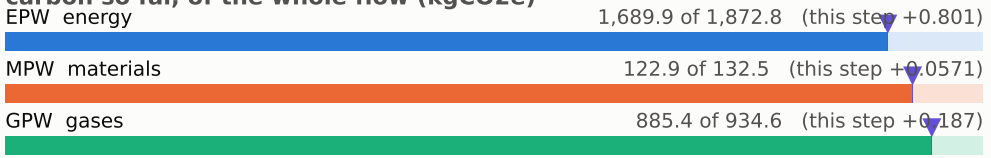

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

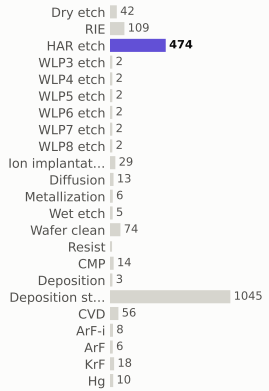

materials deposited (g)

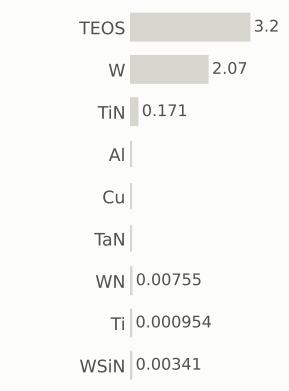

gases emitted (g)

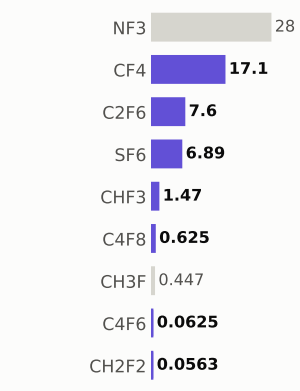

Step #25143.557: HAR_etch

etch_noop · HAR_etch

1.04	2,699.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

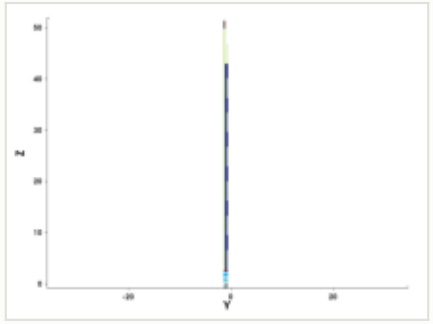

y cut at -1.035 µm

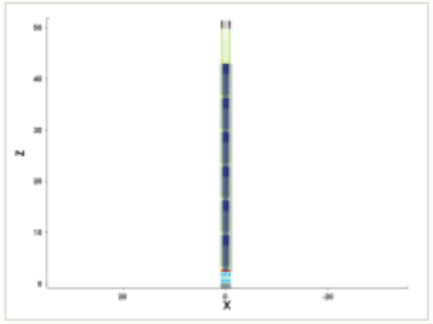

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

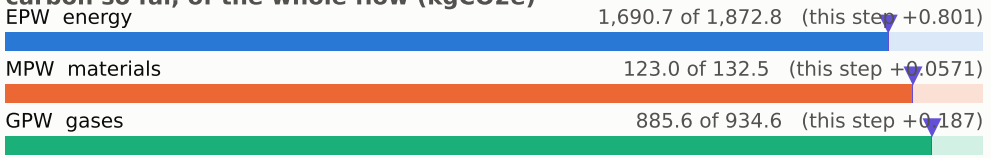

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

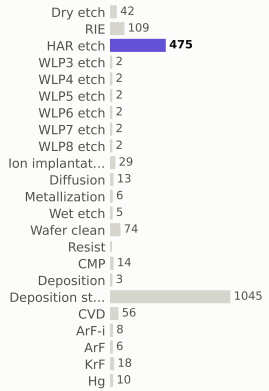

materials deposited (g)

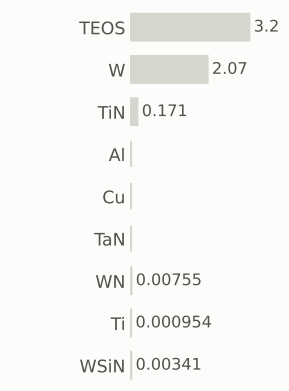

gases emitted (g)

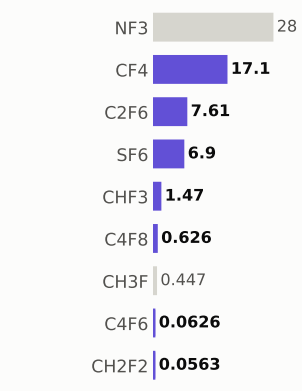

Step #25143.6242: HAR_etch

etch_noop · HAR_etch

1.04	2,700.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

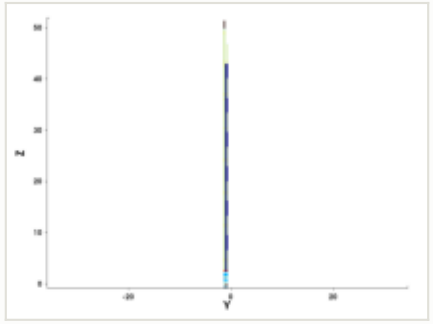

y cut at -1.035 µm

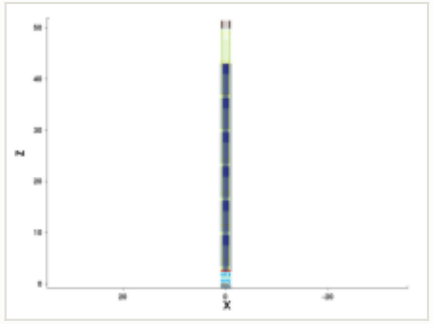

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

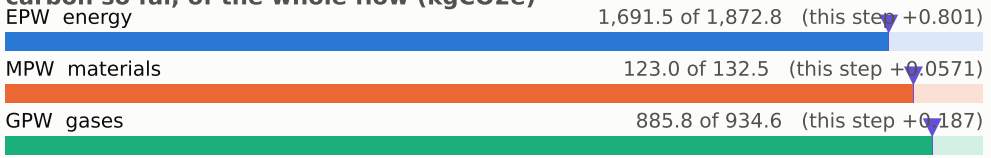

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

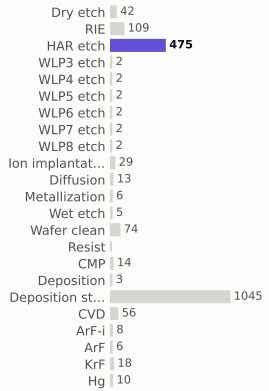

materials deposited (g)

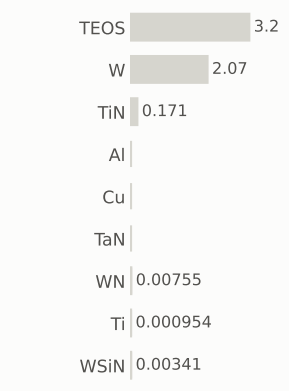

gases emitted (g)

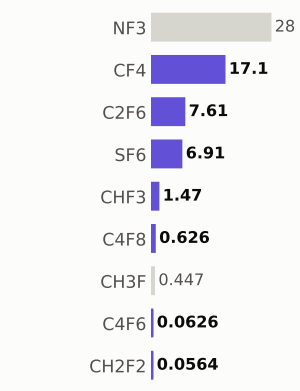

Step #25143.6913: HAR_etch

etch_noop · HAR_etch

1.04	2,701.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

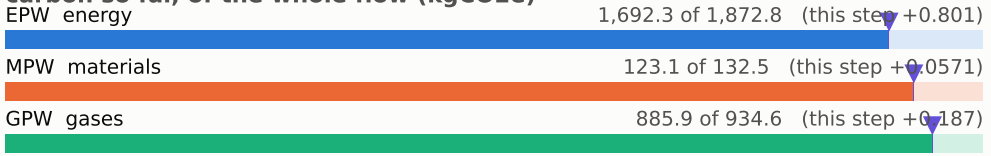

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

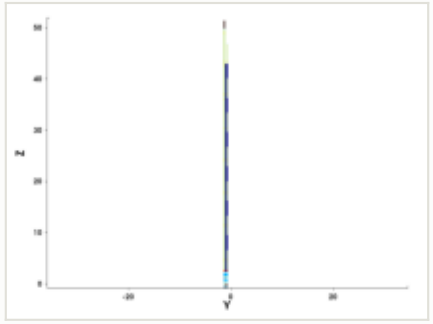

y cut at -1.035 µm

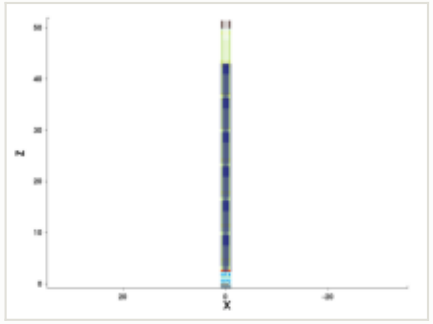

mask for this step

no mask for this step

steps by process area

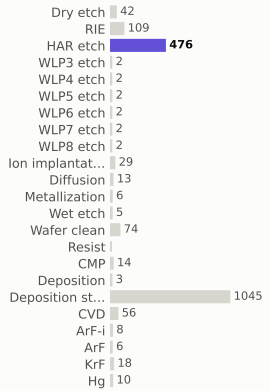

materials deposited (g)

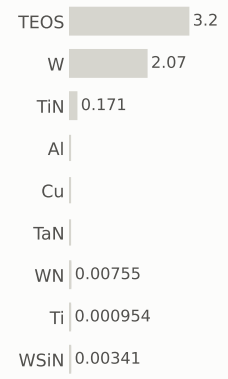

gases emitted (g)



Step #25143.7584: HAR_etch

etch_noop · HAR_etch

1.04	2,702.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

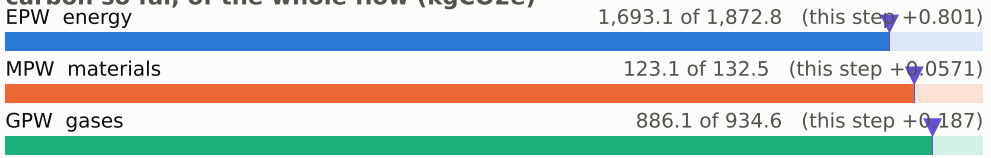

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

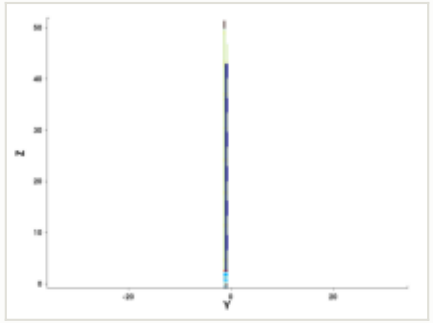

y cut at -1.035 µm

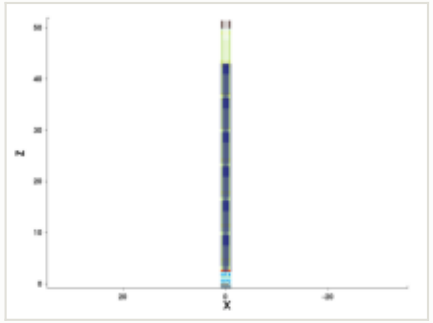

mask for this step

no mask for this step

steps by process area

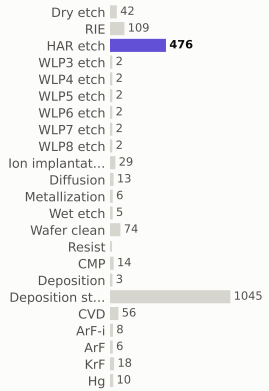

materials deposited (g)

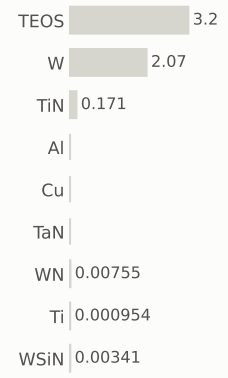

gases emitted (g)



Step #25143.8255: HAR_etch

etch_noop · HAR_etch

1.04	2,703.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

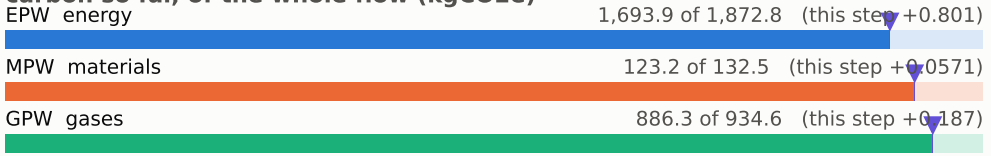

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

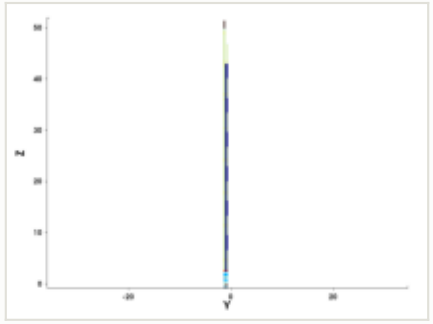

y cut at -1.035 µm

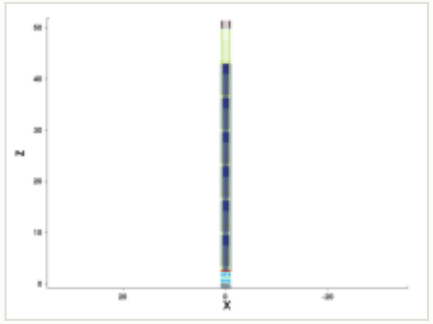

mask for this step

no mask for this step

steps by process area

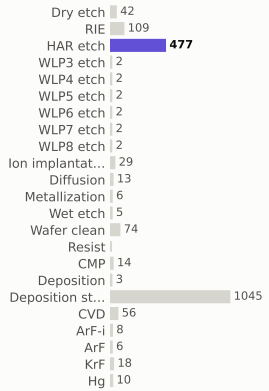

materials deposited (g)

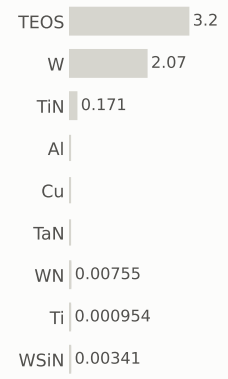

gases emitted (g)



Step #25143.8926: HAR_etch

etch_noop · HAR_etch

1.04	2,704.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

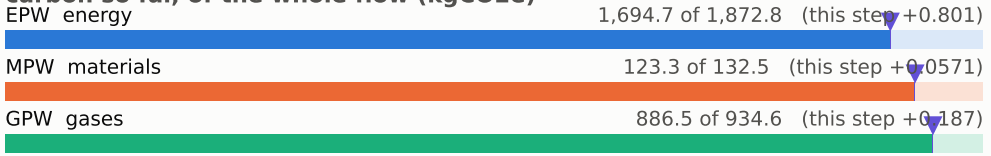

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

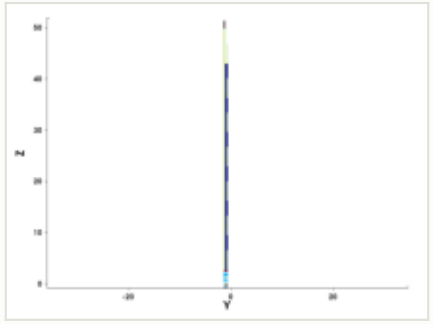

y cut at -1.035 µm

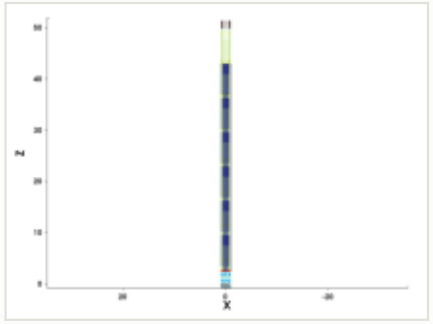

mask for this step

no mask for this step

steps by process area

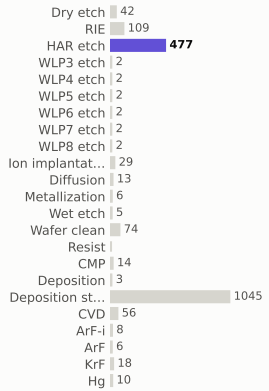

materials deposited (g)

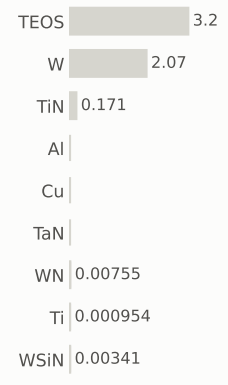

gases emitted (g)



Step #25143.9597: HAR_etch

etch_noop · HAR_etch

1.04	2,705.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

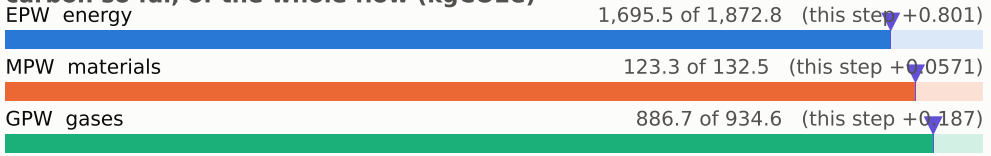

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

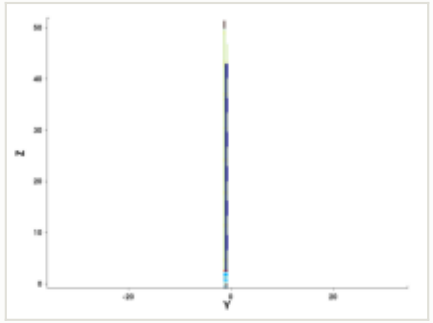

y cut at -1.035 µm

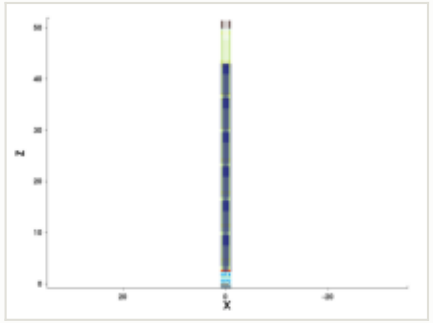

mask for this step

no mask for this step

steps by process area

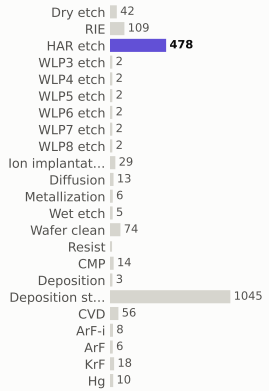

materials deposited (g)

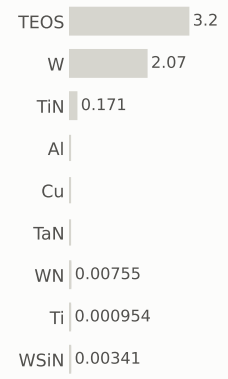

gases emitted (g)



Step #25144.0268: HAR_etch

etch_noop · HAR_etch

1.04	2,706.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

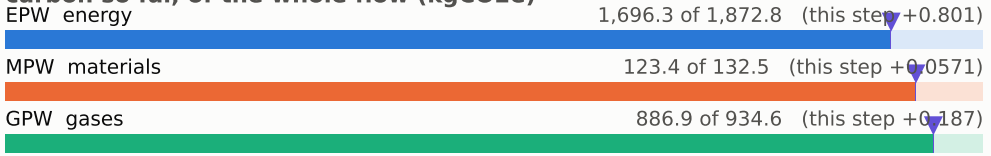

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

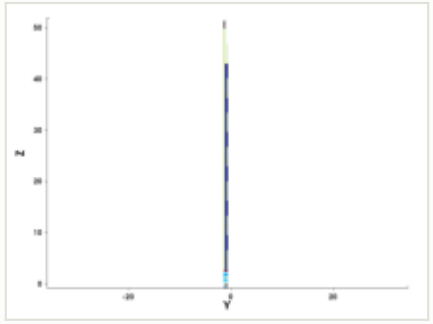

y cut at -1.035 µm

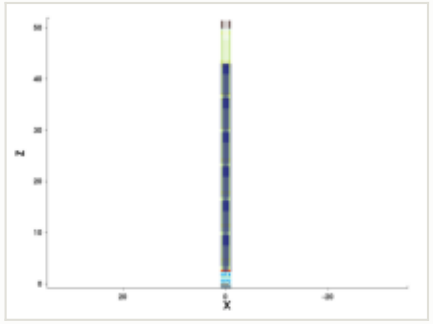

mask for this step

no mask for this step

steps by process area

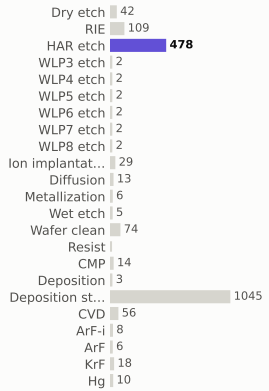

materials deposited (g)

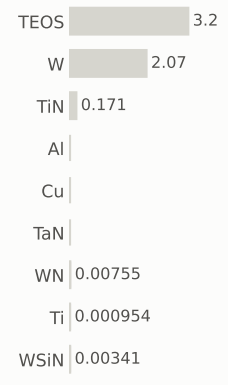

gases emitted (g)



Step #25144.094: HAR_etch

etch_noop · HAR_etch

1.04	2,707.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

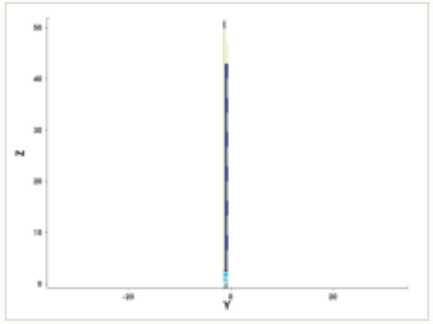

y cut at -1.035 µm

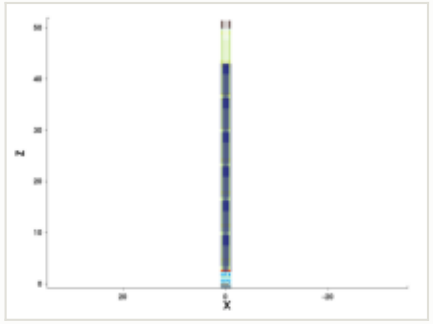

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

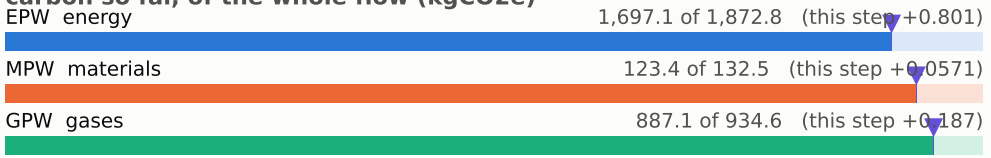

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

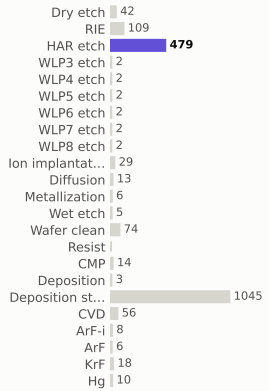

materials deposited (g)

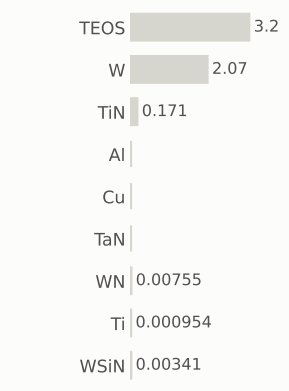

gases emitted (g)

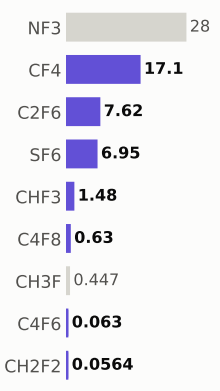

Step #25144.1611: HAR_etch

etch_noop · HAR_etch

1.04	2,708.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

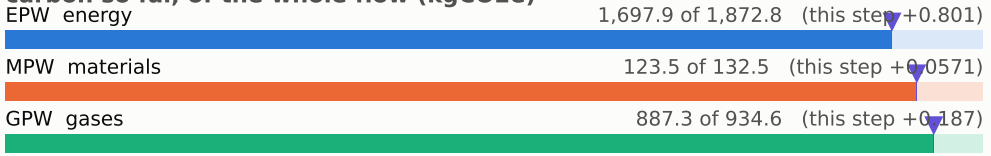

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

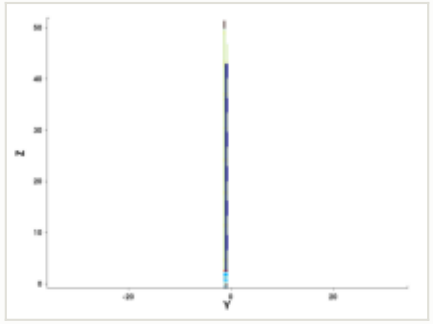

y cut at -1.035 µm

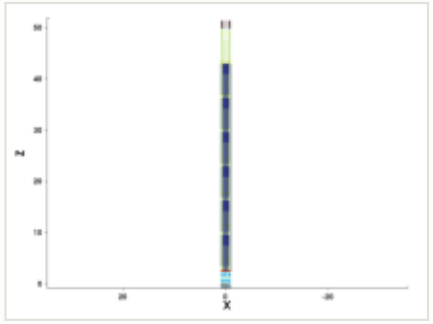

mask for this step

no mask for this step

steps by process area

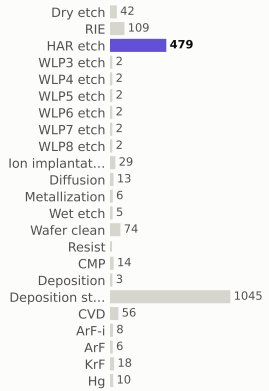

materials deposited (g)

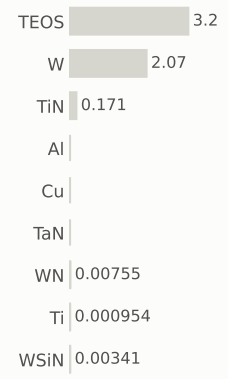

gases emitted (g)



Step #25144.2282: HAR_etch

etch_noop · HAR_etch

1.04	2,709.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

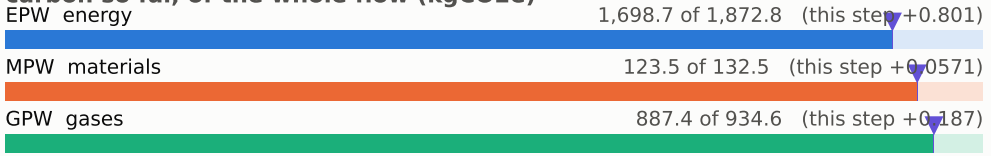

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

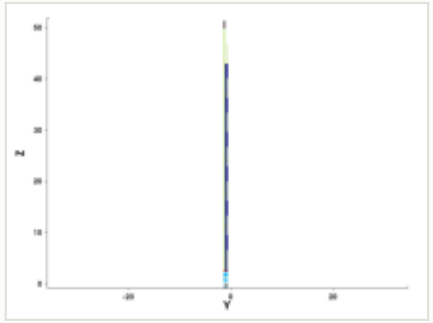

y cut at -1.035 µm

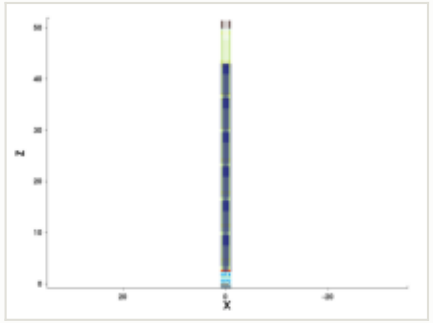

mask for this step

no mask for this step

steps by process area

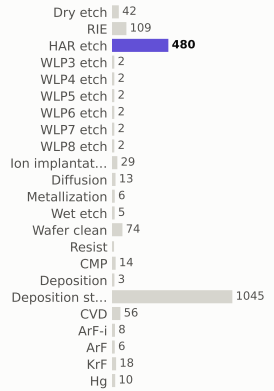

materials deposited (g)

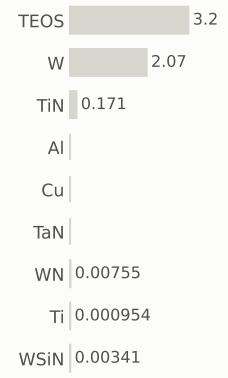

gases emitted (g)



Step #25144.2953: HAR_etch

etch_noop · HAR_etch

1.04	2,710.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

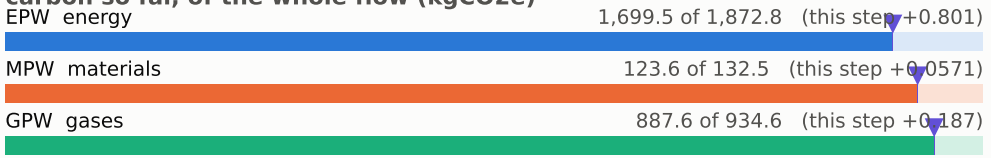

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

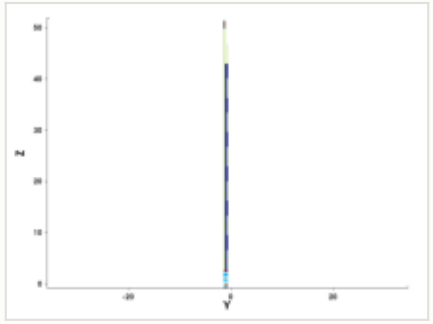

y cut at -1.035 µm

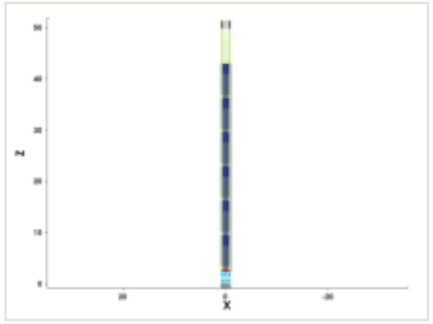

mask for this step

no mask for this step

steps by process area

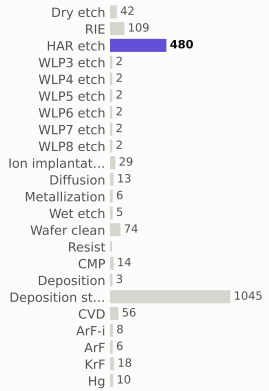

materials deposited (g)

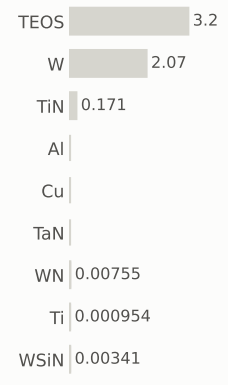

gases emitted (g)



Step #25144.3624: HAR_etch

etch_noop · HAR_etch

1.04	2,711.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

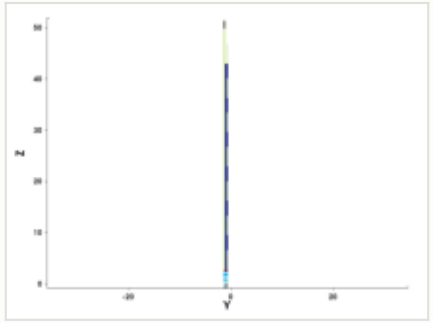

y cut at -1.035 µm

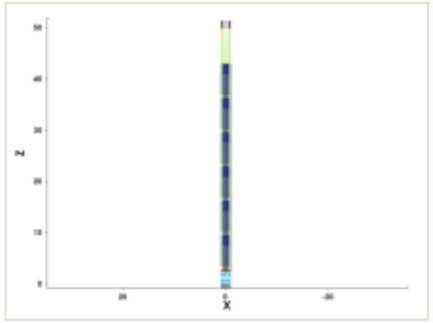

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

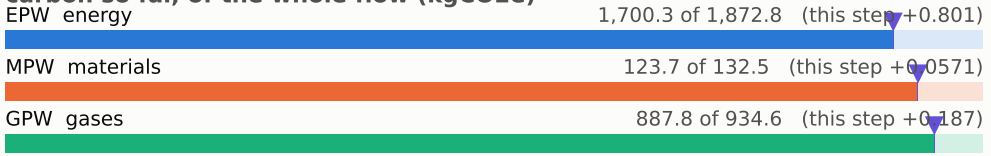

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

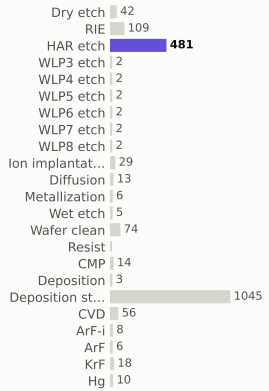

materials deposited (g)

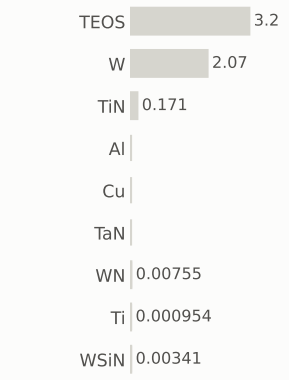

gases emitted (g)



Step #25144.4295: HAR_etch

etch_noop · HAR_etch

1.04	2,712.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

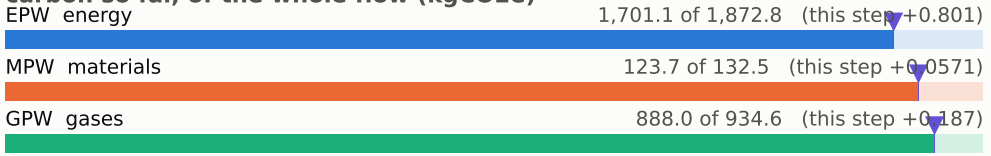

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

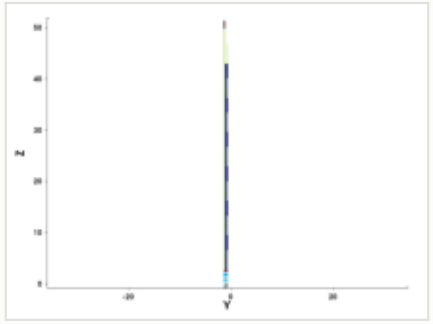

y cut at -1.035 µm

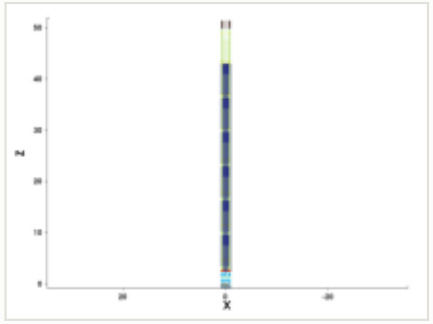

mask for this step

no mask for this step

steps by process area

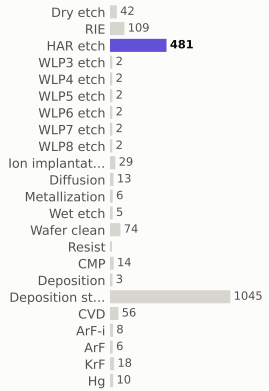

materials deposited (g)

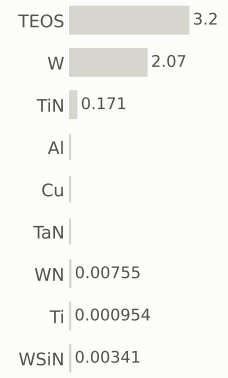

gases emitted (g)



Step #25144.4966: HAR_etch

etch_noop · HAR_etch

1.04	2,713.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

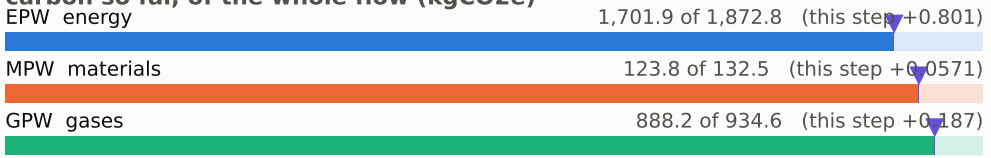

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

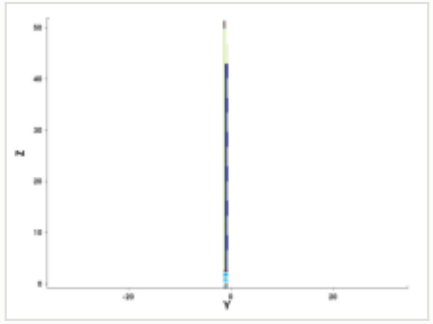

y cut at -1.035 µm

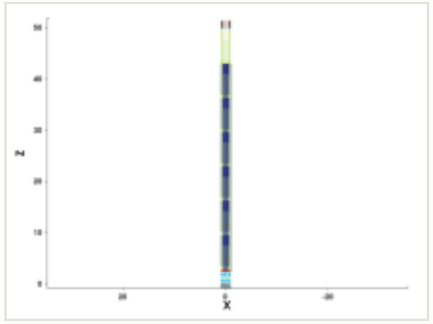

mask for this step

no mask for this step

steps by process area

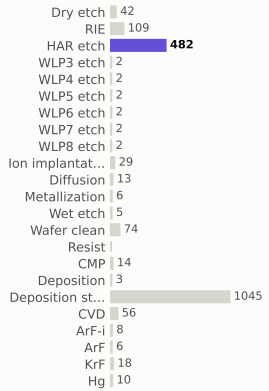

materials deposited (g)

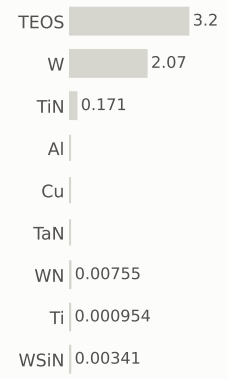

gases emitted (g)



Step #25144.5638: HAR_etch

etch_noop · HAR_etch

1.04	2,714.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

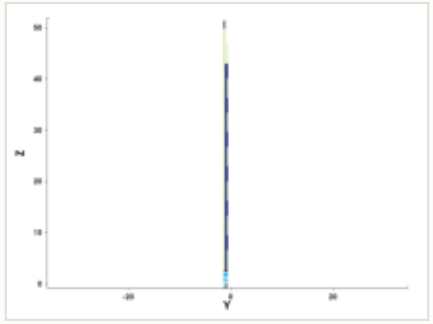

y cut at -1.035 µm

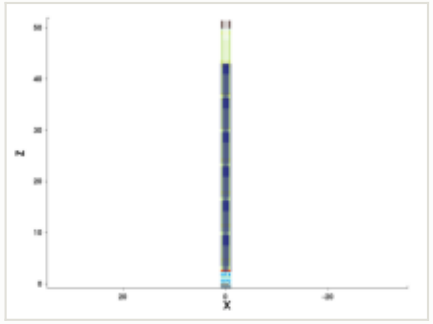

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

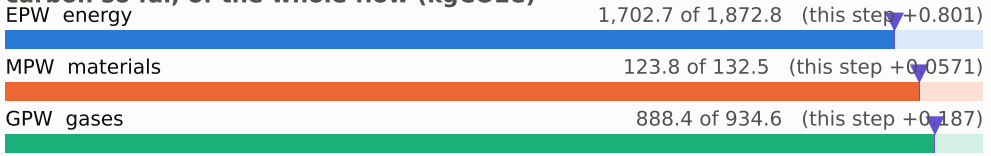

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

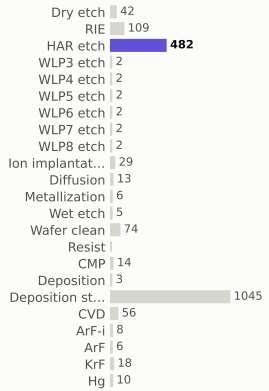

materials deposited (g)

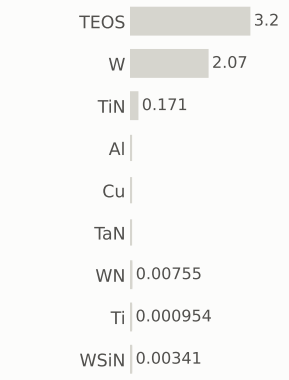

gases emitted (g)



Step #25144.6309: HAR_etch

etch_noop · HAR_etch

1.04	2,716.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

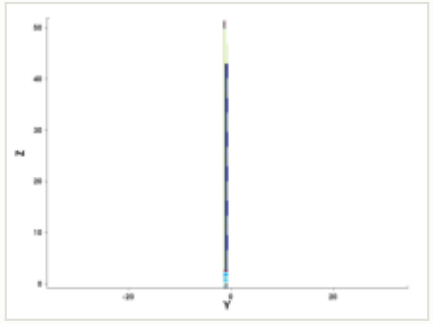

y cut at -1.035 µm

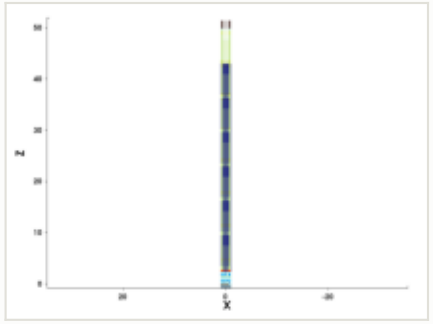

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

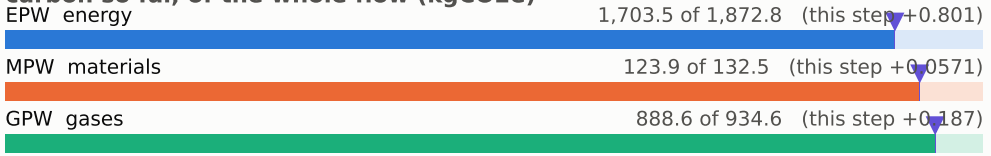

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

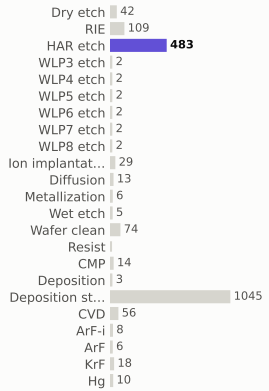

materials deposited (g)

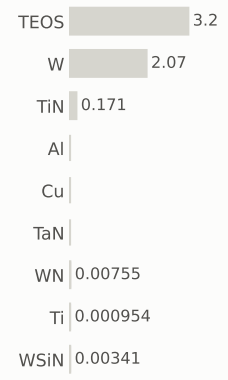

gases emitted (g)



Step #25144.698: HAR_etch

etch_noop · HAR_etch

1.04	2,717.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

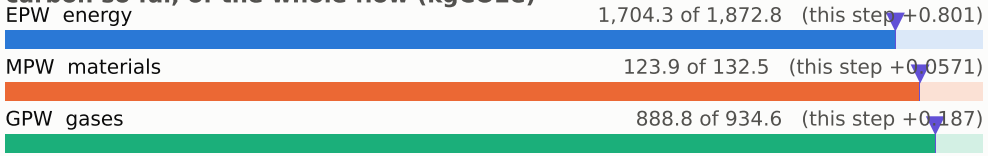

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

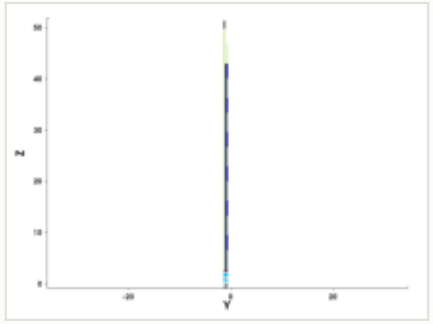

y cut at -1.035 µm

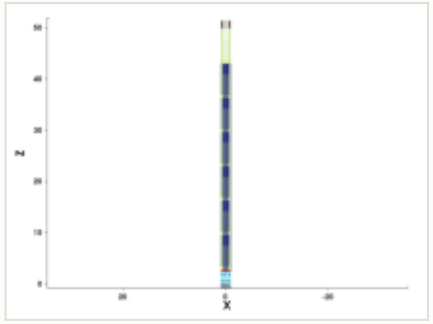

mask for this step

no mask for this step

steps by process area

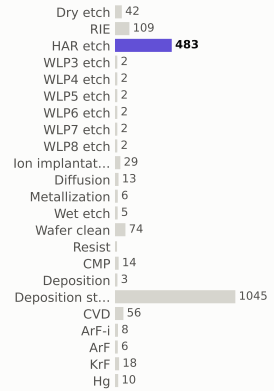

materials deposited (g)

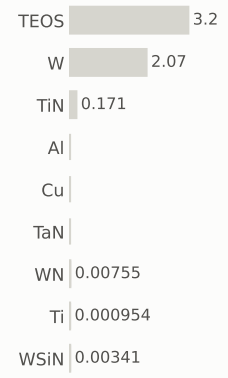

gases emitted (g)



Step #25144.7651: HAR_etch

etch_noop · HAR_etch

1.04	2,718.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

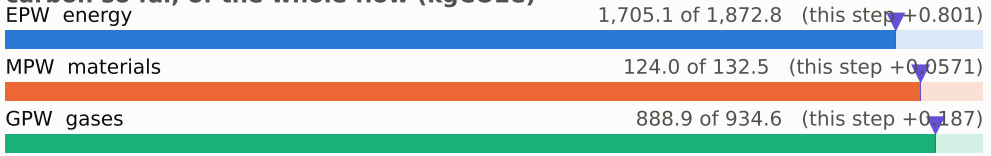

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

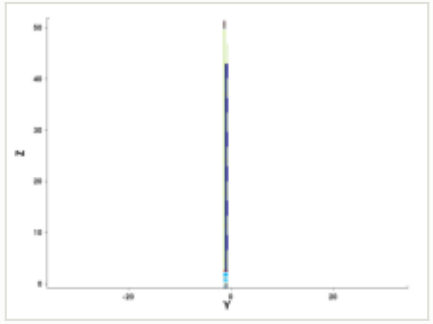

y cut at -1.035 µm

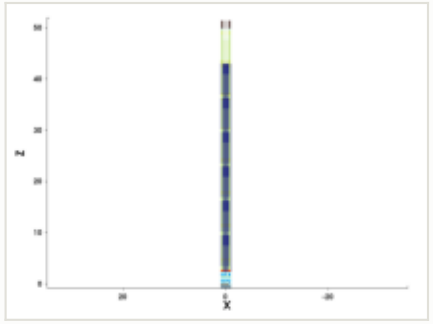

mask for this step

no mask for this step

steps by process area

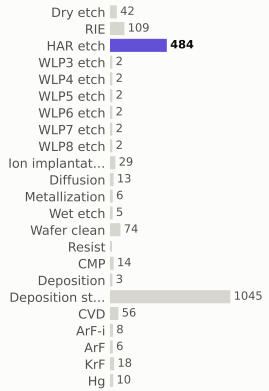

materials deposited (g)

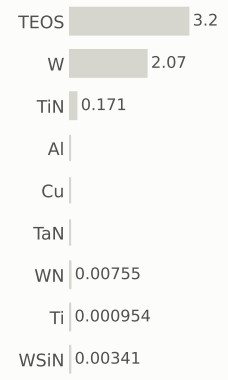

gases emitted (g)



Step #25144.8322: HAR_etch

etch_noop · HAR_etch

1.04	2,719.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

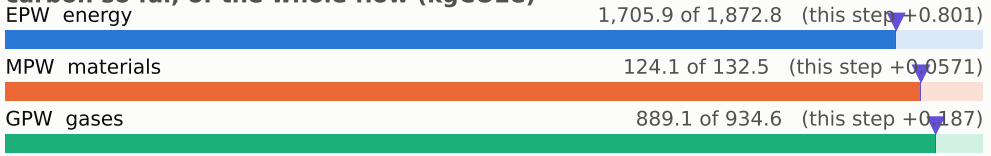

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

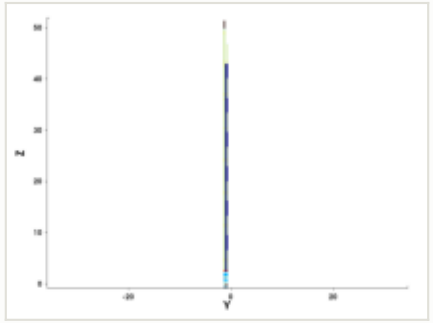

y cut at -1.035 µm

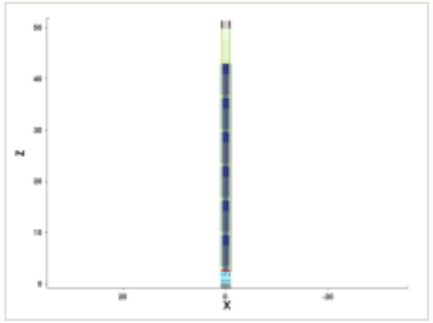

mask for this step

no mask for this step

steps by process area

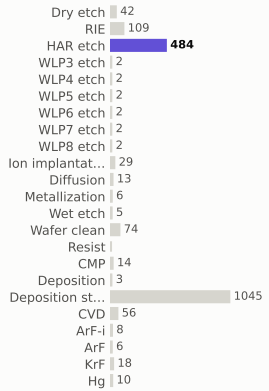

materials deposited (g)

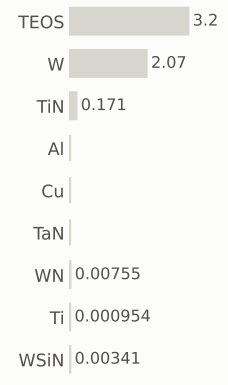

gases emitted (g)



Step #25144.8993: HAR_etch

etch_noop · HAR_etch

1.04	2,720.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

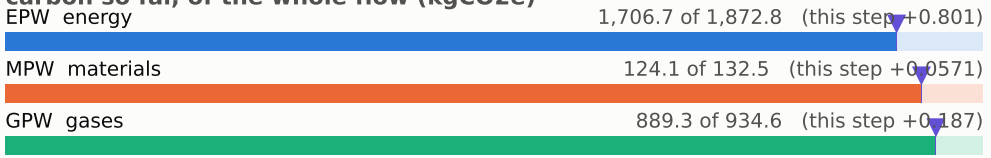

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

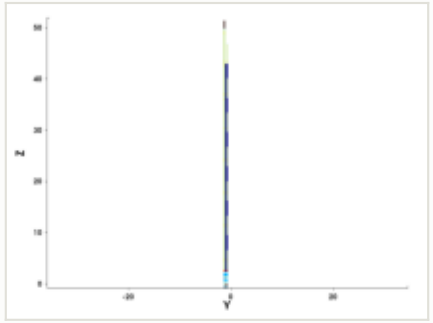

y cut at -1.035 µm

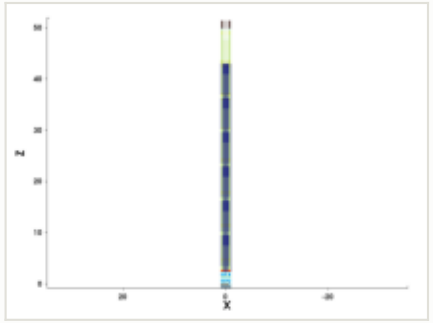

mask for this step

no mask for this step

steps by process area

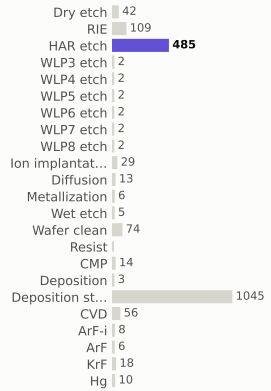

materials deposited (g)

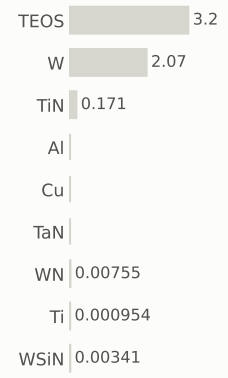

gases emitted (g)



Step #25144.9664: HAR_etch

etch_noop · HAR_etch

1.04	2,721.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

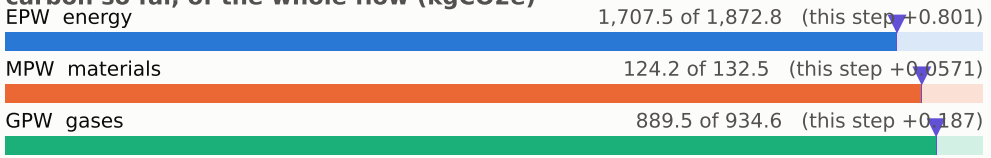

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

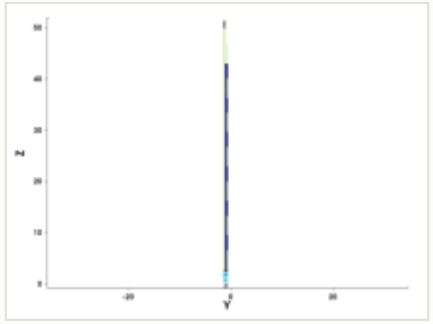

y cut at -1.035 µm

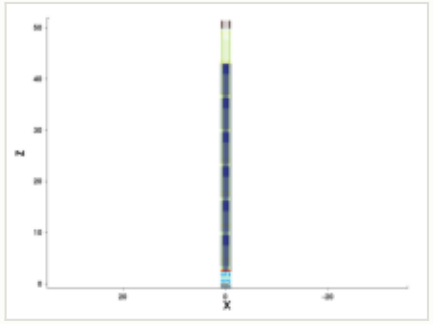

mask for this step

no mask for this step

steps by process area

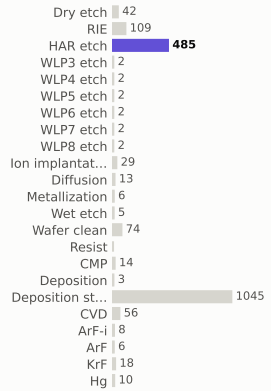

materials deposited (g)

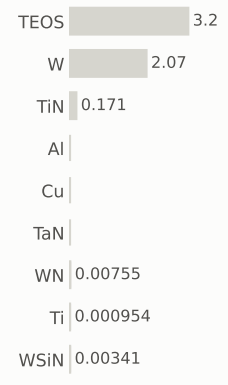

gases emitted (g)



Step #25145.0336: HAR_etch

etch_noop · HAR_etch

1.04	2,722.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

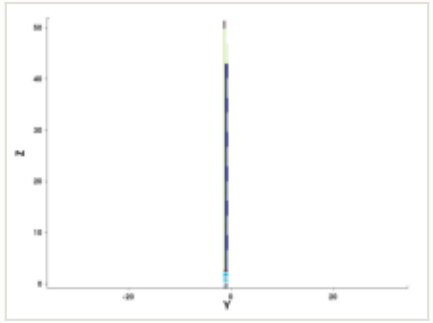

y cut at -1.035 µm

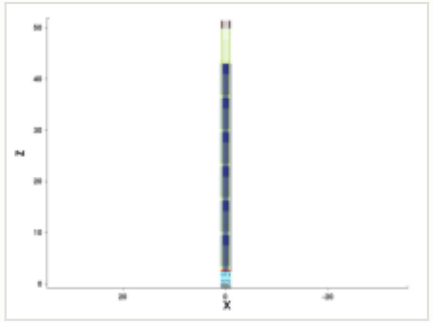

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

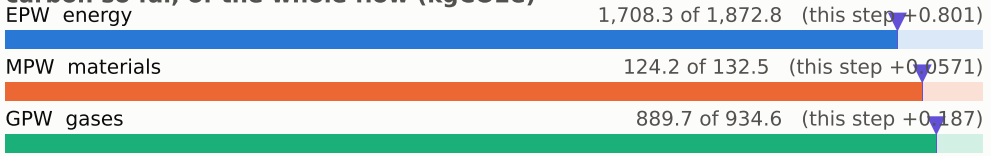

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

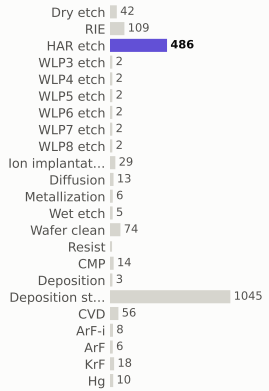

materials deposited (g)

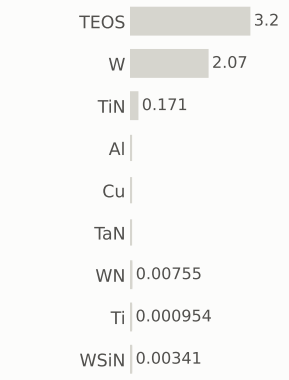

gases emitted (g)



Step #25145.1007: HAR_etch

etch_noop · HAR_etch

1.04	2,723.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

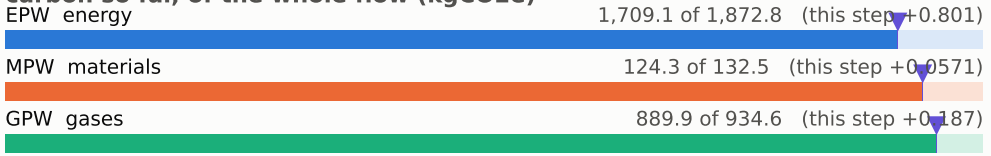

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

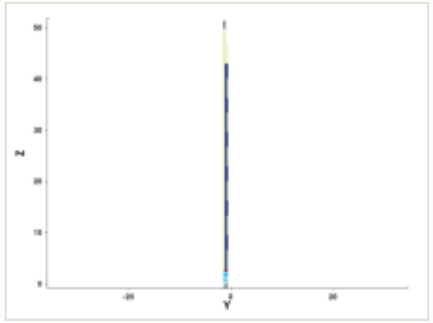

y cut at -1.035 µm

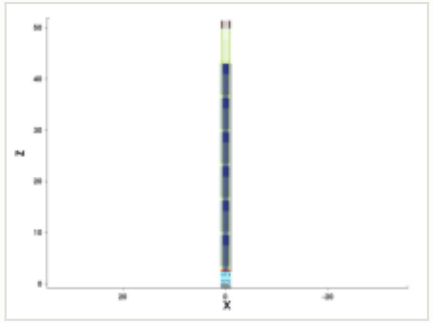

mask for this step

no mask for this step

steps by process area

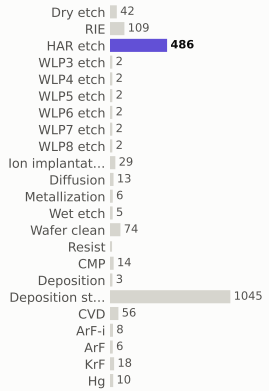

materials deposited (g)

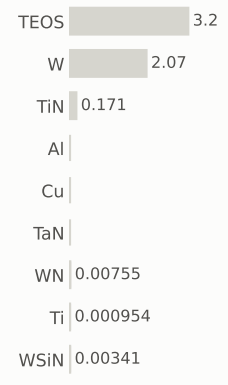

gases emitted (g)



Step #25145.1678: HAR_etch

etch_noop · HAR_etch

1.04	2,724.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

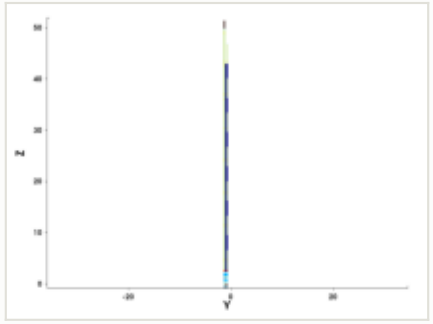

y cut at -1.035 µm

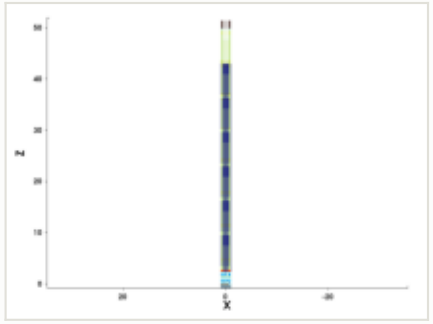

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

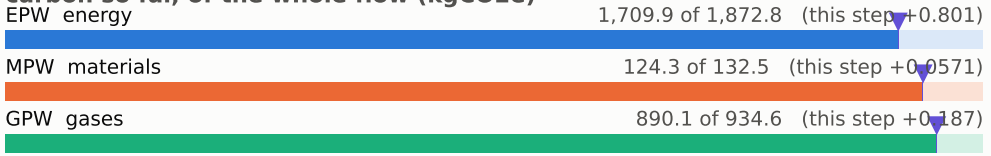

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

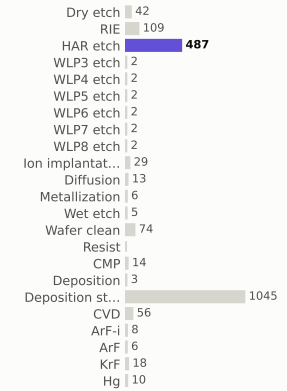

materials deposited (g)

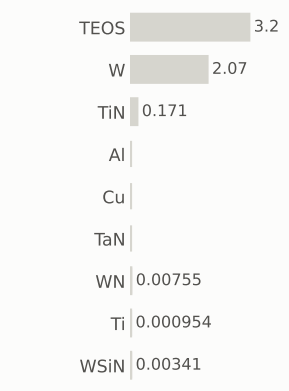

gases emitted (g)

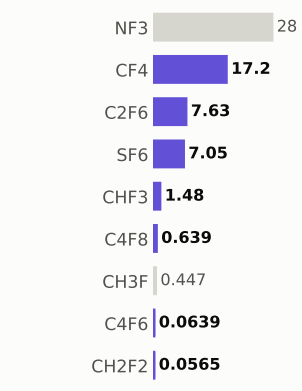

Step #25145.2349: HAR_etch

etch_noop · HAR_etch

1.04	2,725.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

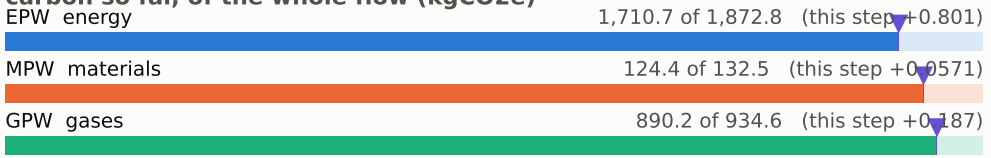

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

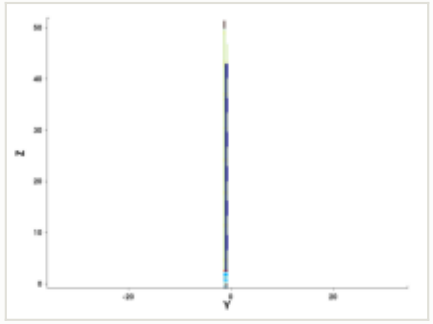

y cut at -1.035 µm

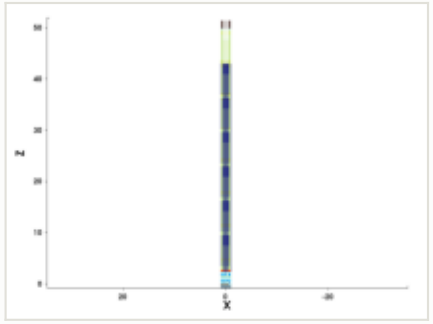

mask for this step

no mask for this step

steps by process area

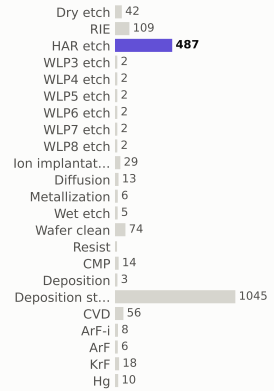

materials deposited (g)

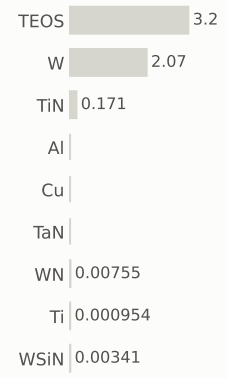

gases emitted (g)



Step #25145.302: HAR_etch

etch_noop · HAR_etch

1.04	2,726.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

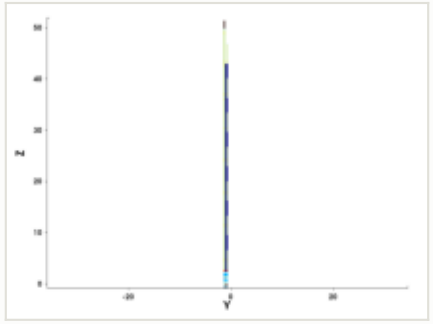

y cut at -1.035 µm

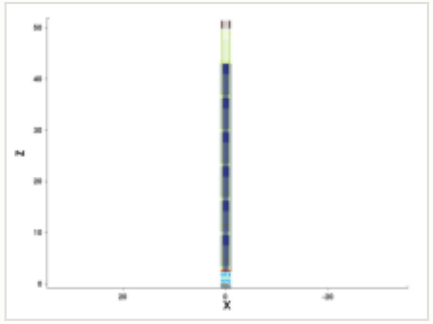

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

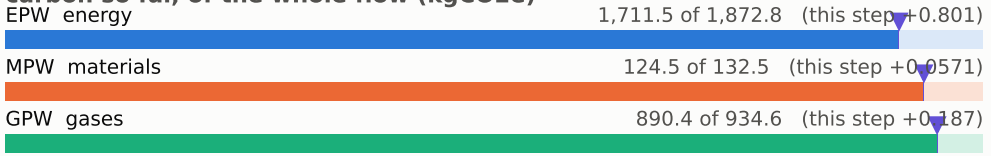

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

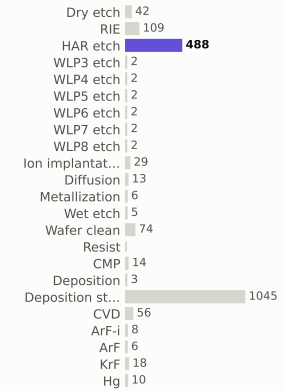

materials deposited (g)

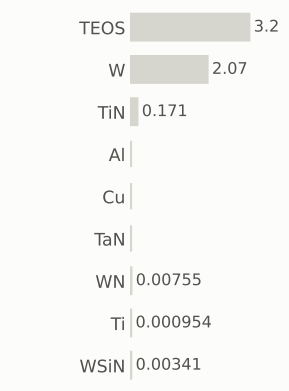

gases emitted (g)

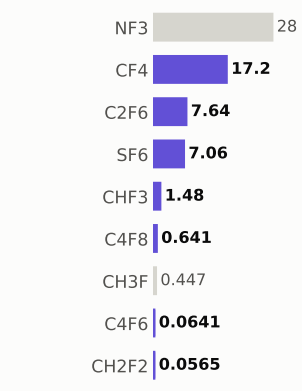

Step #25145.3691: HAR_etch

etch_noop · HAR_etch

1.04	2,727.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

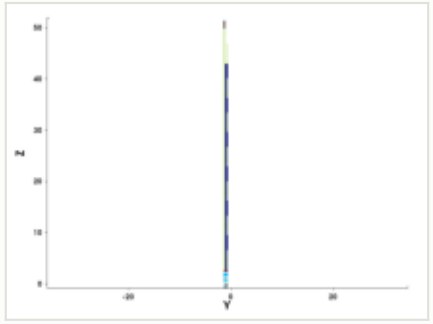

y cut at -1.035 µm

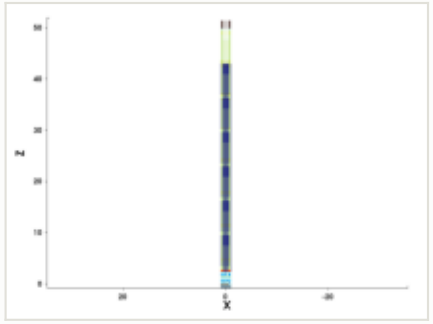

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

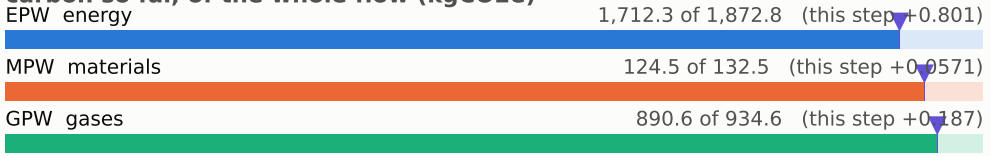

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

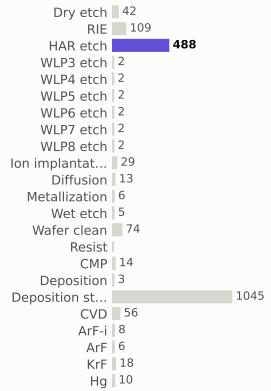

materials deposited (g)

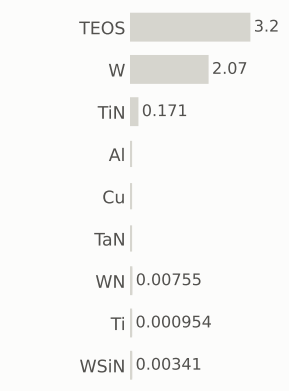

gases emitted (g)

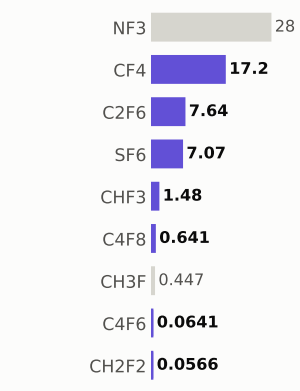

Step #25145.4362: HAR_etch

etch_noop · HAR_etch

1.04	2,728.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

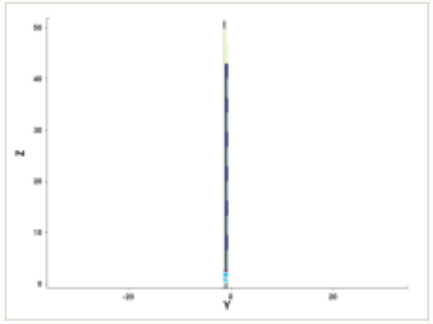

y cut at -1.035 µm

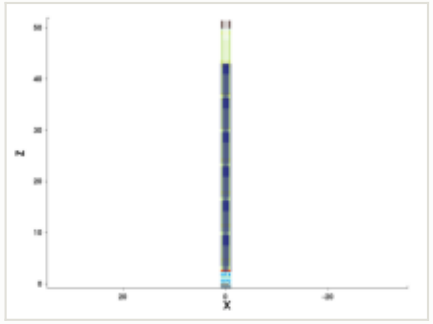

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

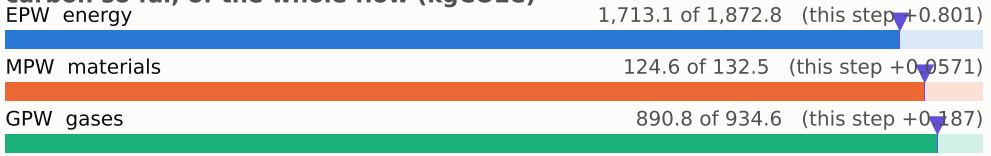

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

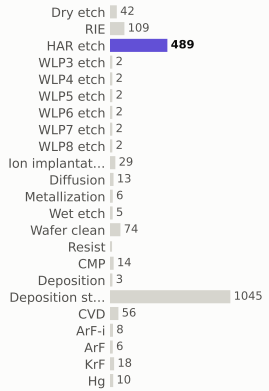

materials deposited (g)



gases emitted (g)



Step #25145.5034: HAR_etch

etch_noop · HAR_etch

1.04	2,729.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

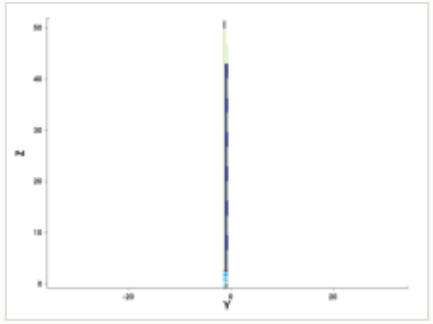

y cut at -1.035 µm

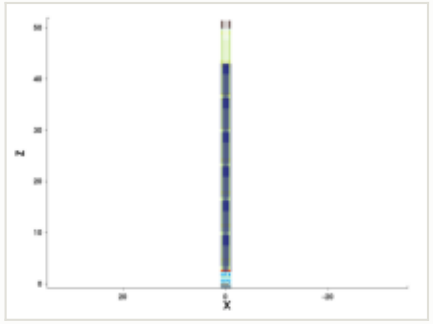

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

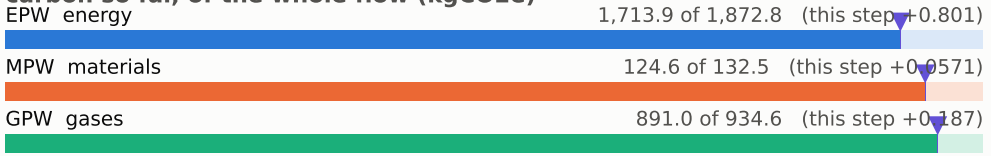

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

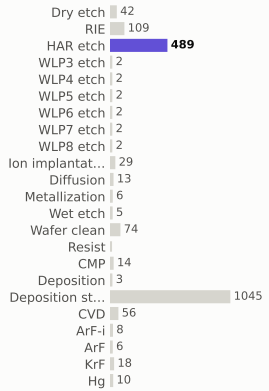

materials deposited (g)



gases emitted (g)

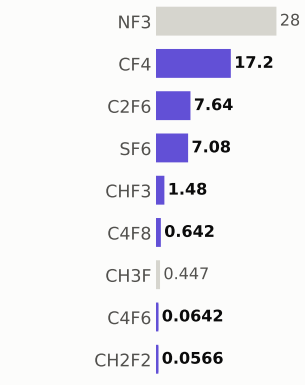

Step #25145.5705: HAR_etch

etch_noop · HAR_etch

1.04	2,730.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

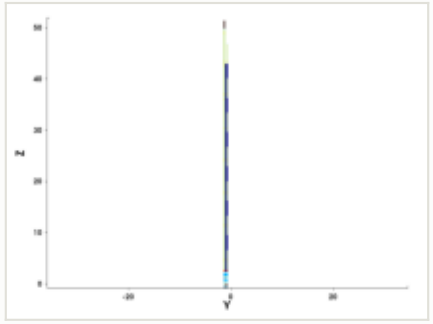

y cut at -1.035 µm

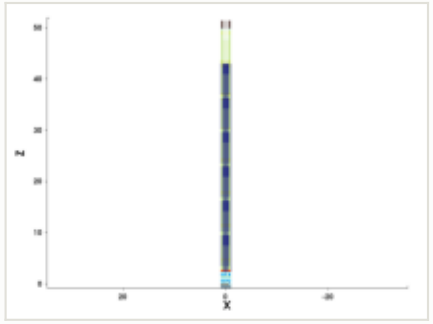

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

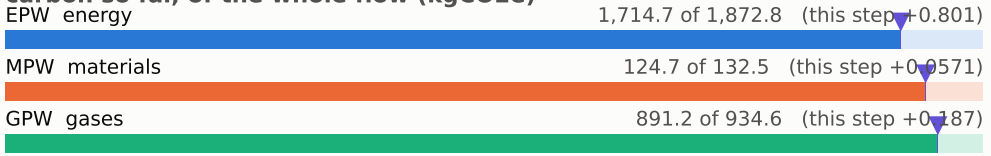

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

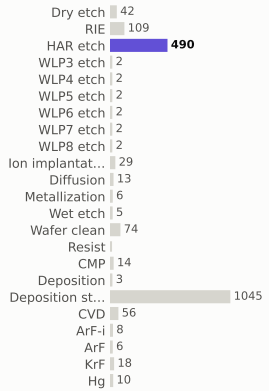

materials deposited (g)

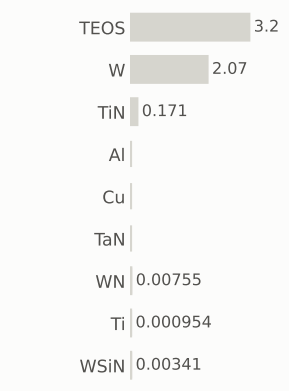

gases emitted (g)

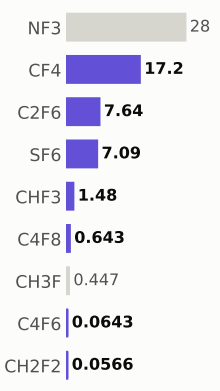

Step #25145.6376: HAR_etch

etch_noop · HAR_etch

1.04	2,731.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

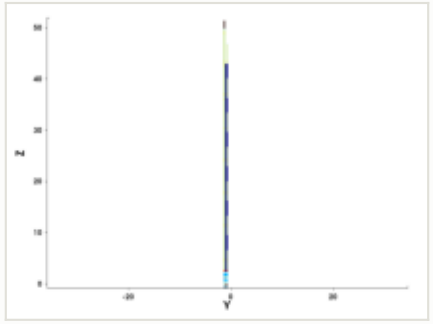

y cut at -1.035 µm

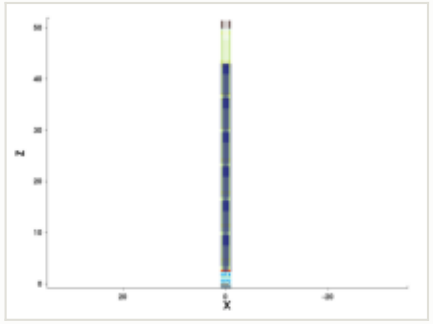

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

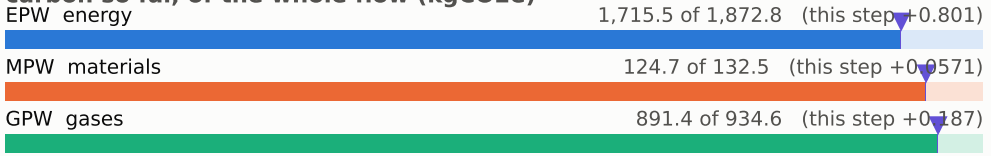

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

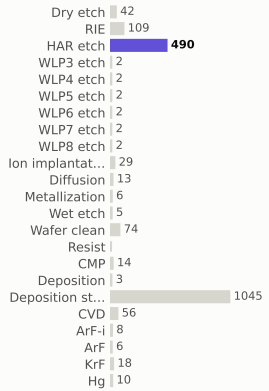

materials deposited (g)

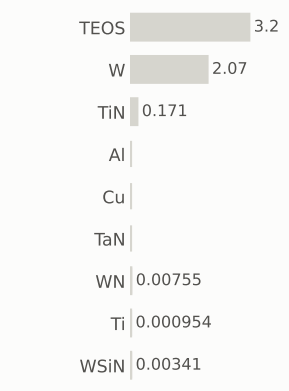

gases emitted (g)

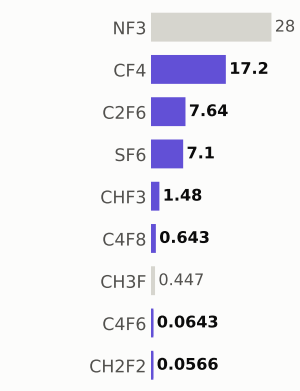

Step #25145.7047: HAR_etch

etch_noop · HAR_etch

1.04	2,732.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

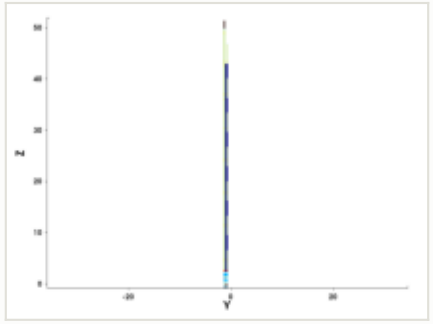

y cut at -1.035 µm

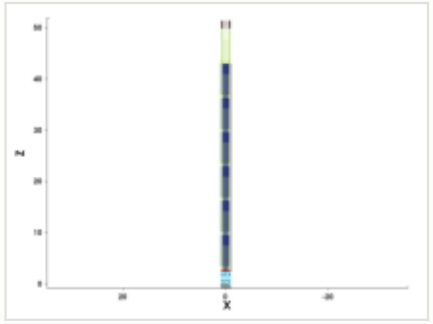

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

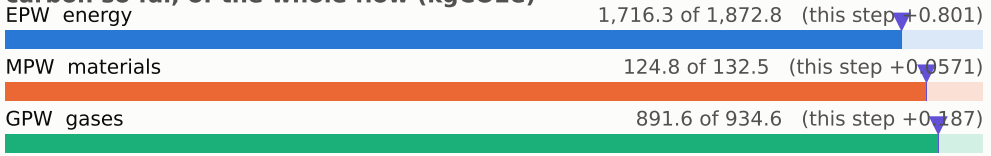

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

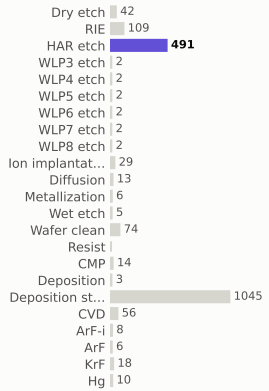

materials deposited (g)

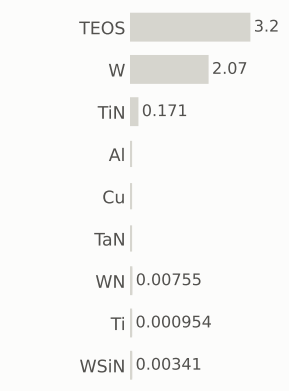

gases emitted (g)

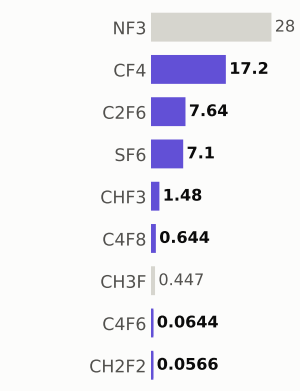

Step #25145.7718: HAR_etch

etch_noop · HAR_etch

1.04	2,733.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

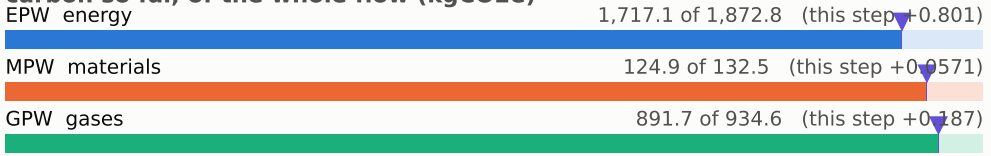

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

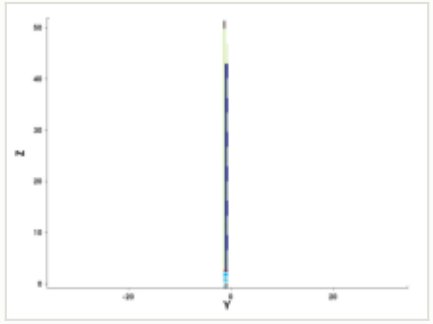

y cut at -1.035 µm

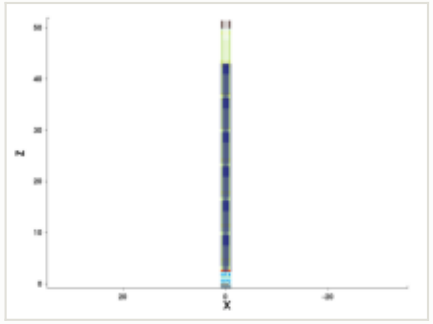

mask for this step

no mask for this step

steps by process area

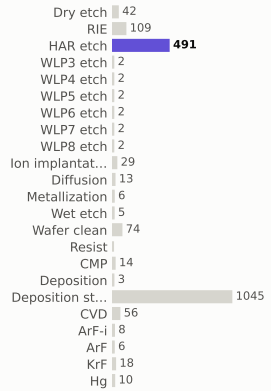

materials deposited (g)

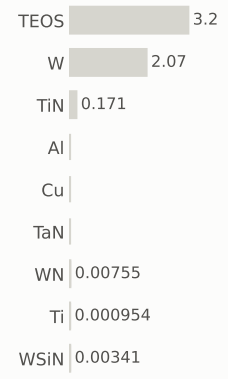

gases emitted (g)



Step #25145.8389: HAR_etch

etch_noop · HAR_etch

1.04	2,734.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

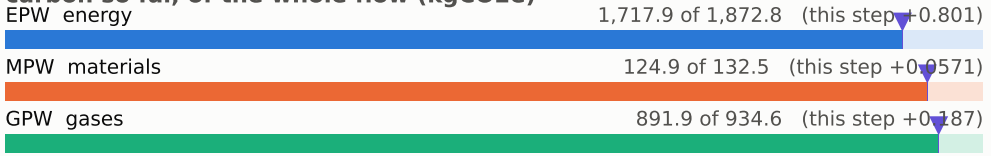

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

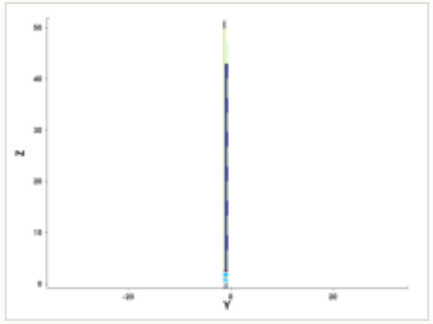

y cut at -1.035 µm

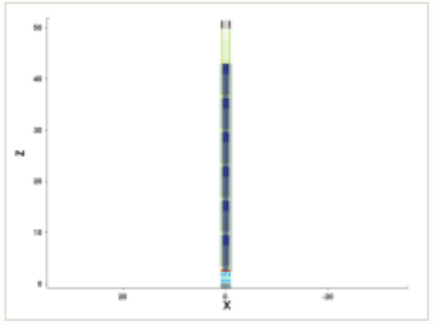

mask for this step

no mask for this step

steps by process area

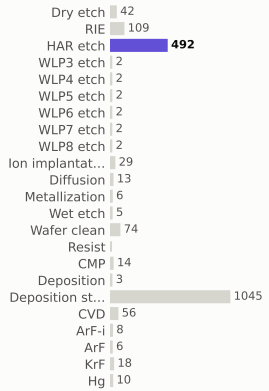

materials deposited (g)

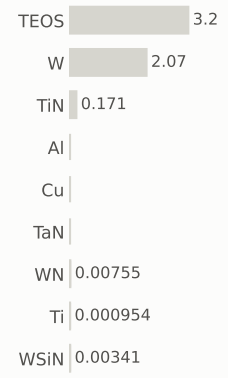

gases emitted (g)



Step #25145.906: HAR_etch

etch_noop · HAR_etch

1.04	2,735.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

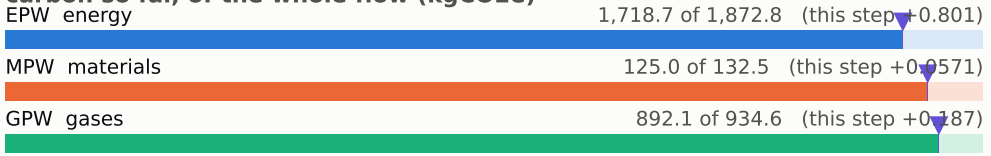

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

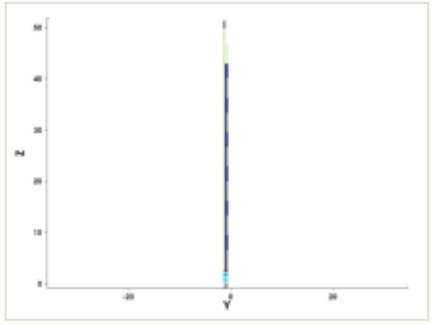

y cut at -1.035 µm

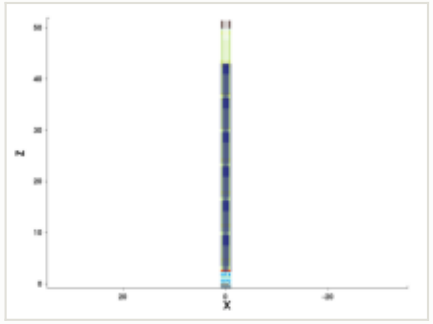

mask for this step

no mask for this step

steps by process area

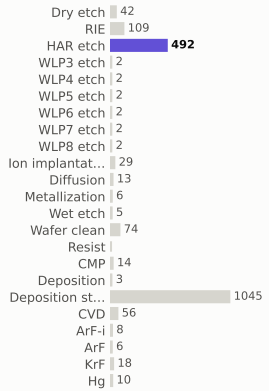

materials deposited (g)

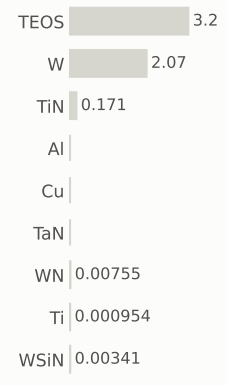

gases emitted (g)



Step #25145.9732: HAR_etch

etch_noop · HAR_etch

1.04	2,736.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

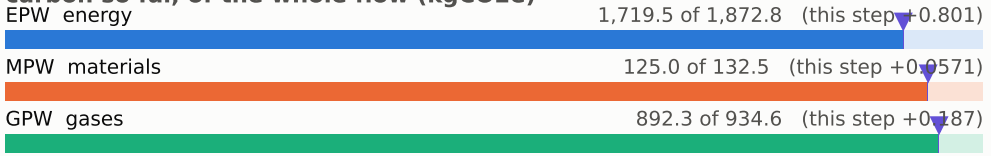

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

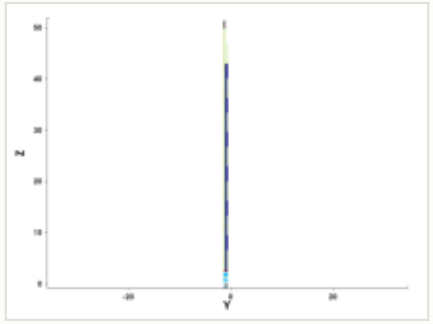

y cut at -1.035 µm

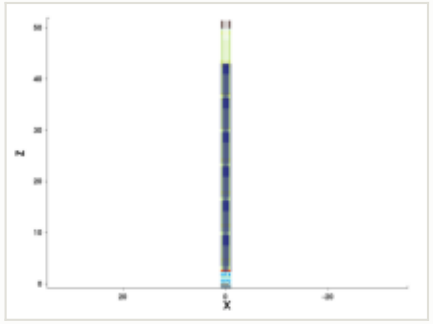

mask for this step

no mask for this step

steps by process area

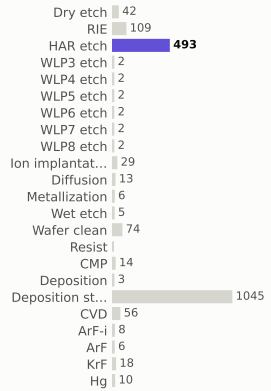

materials deposited (g)

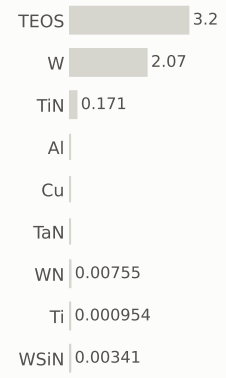

gases emitted (g)



Step #25146.0403: HAR_etch

etch_noop · HAR_etch

1.04	2,737.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

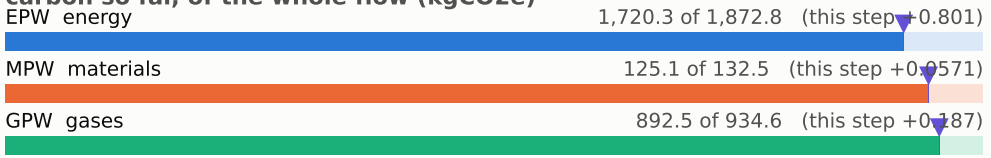

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

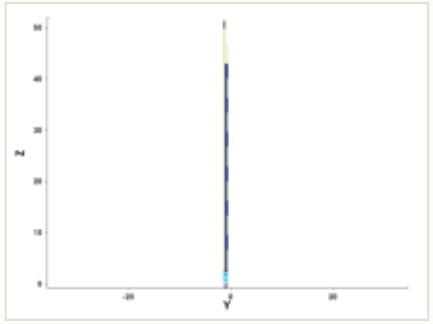

y cut at -1.035 µm

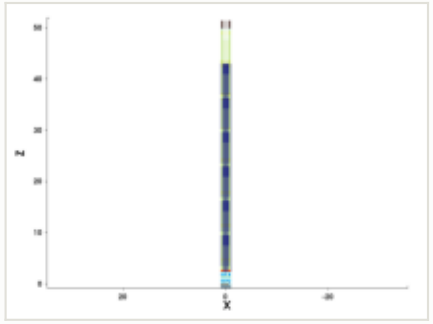

mask for this step

no mask for this step

steps by process area

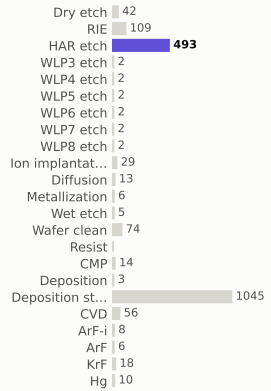

materials deposited (g)

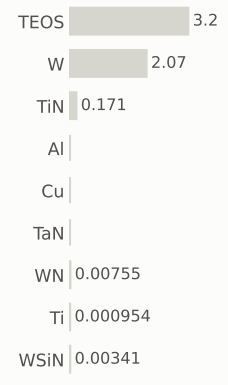

gases emitted (g)



Step #25146.1074: HAR_etch

etch_noop · HAR_etch

1.04	2,738.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

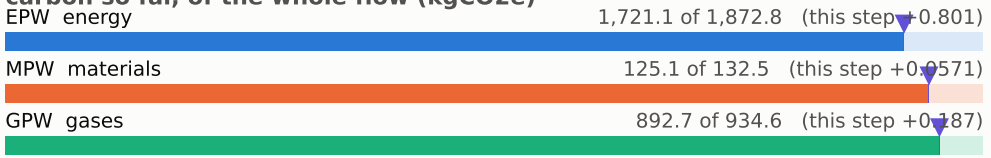

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

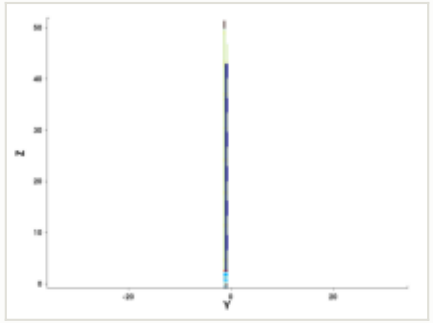

y cut at -1.035 µm

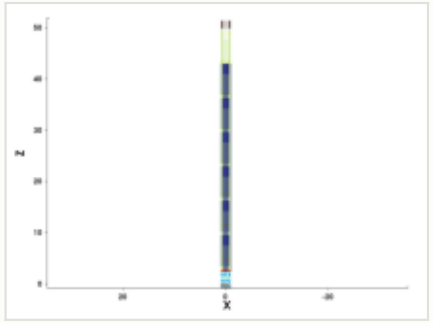

mask for this step

no mask for this step

steps by process area

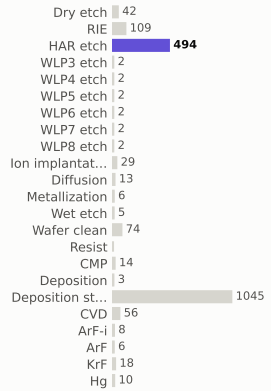

materials deposited (g)

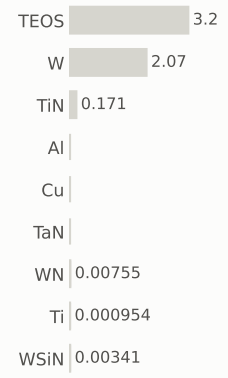

gases emitted (g)



Step #25146.1745: HAR_etch

etch_noop · HAR_etch

1.04	2,740.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

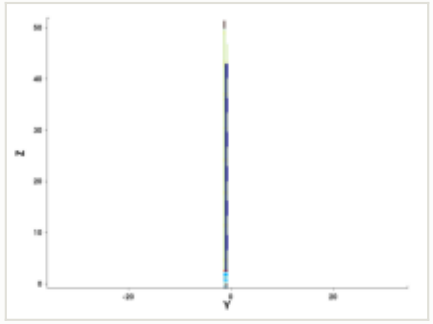

y cut at -1.035 µm

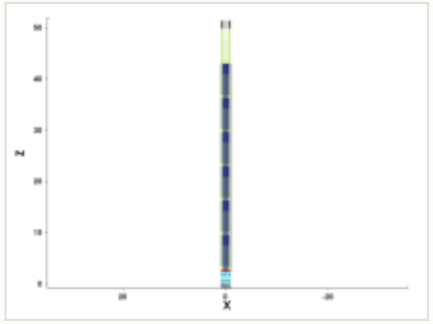

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

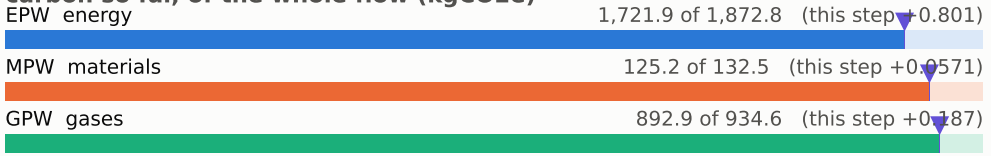

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

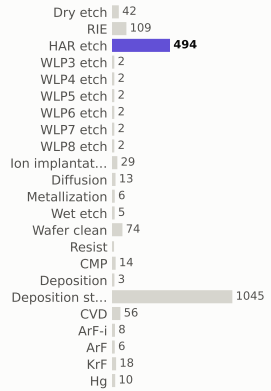

materials deposited (g)

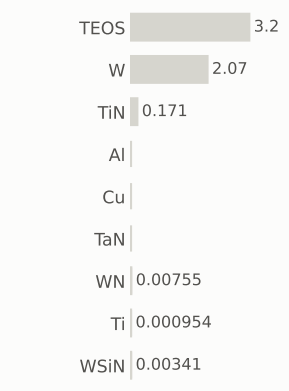

gases emitted (g)

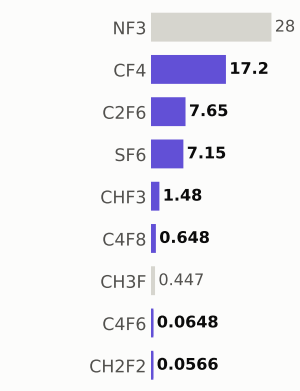

Step #25146.2416: HAR_etch

etch_noop · HAR_etch

1.04	2,741.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

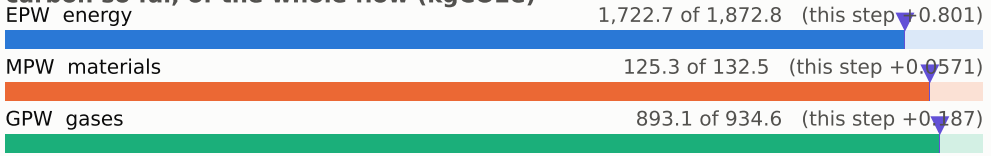

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

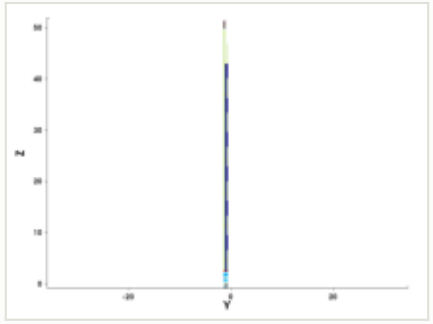

y cut at -1.035 µm

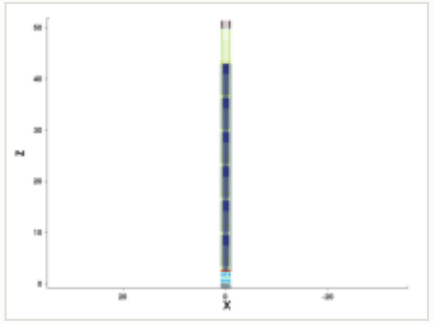

mask for this step

no mask for this step

steps by process area

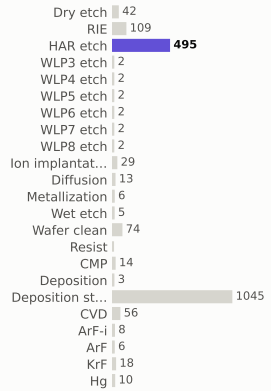

materials deposited (g)

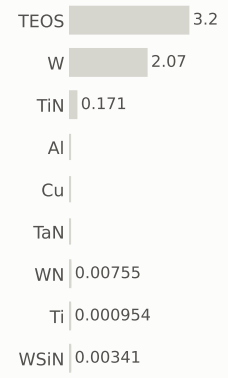

gases emitted (g)



Step #25146.3087: HAR_etch

etch_noop · HAR_etch

1.04	2,742.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

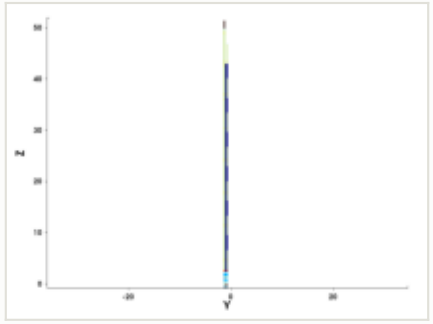

y cut at -1.035 µm

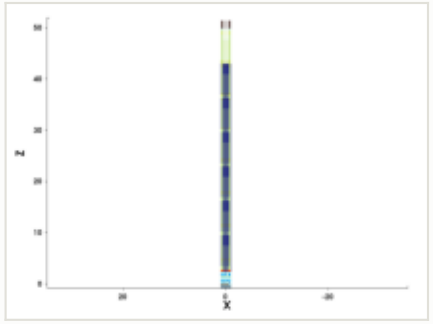

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

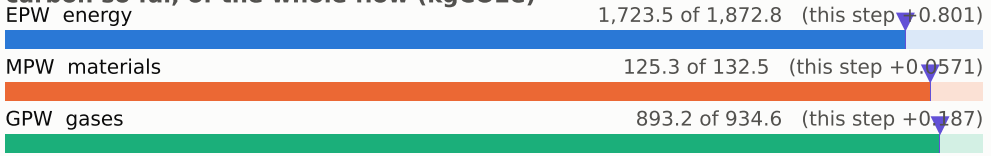

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

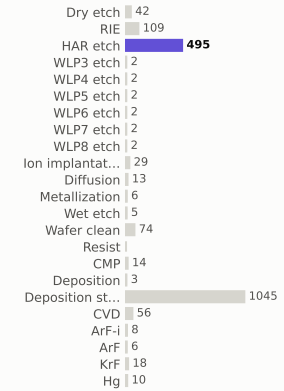

materials deposited (g)

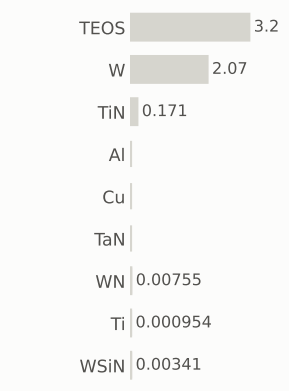

gases emitted (g)

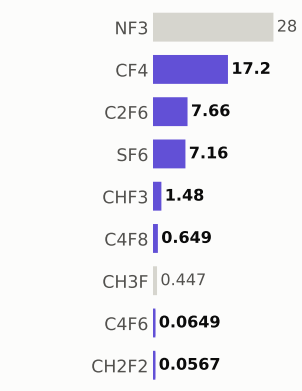

Step #25146.3758: HAR_etch

etch_noop · HAR_etch

1.04	2,743.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

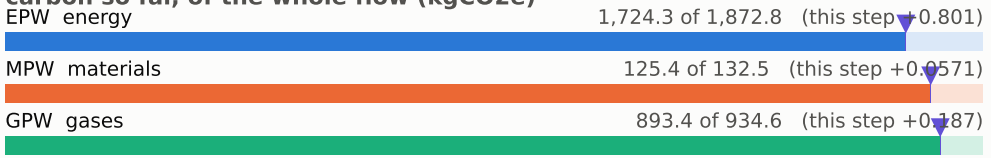

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

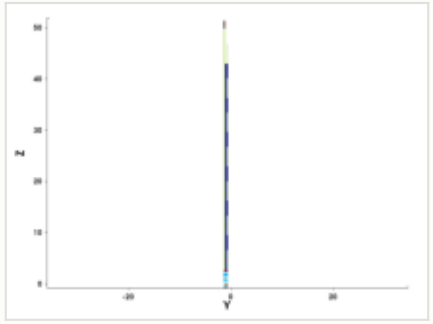

y cut at -1.035 µm

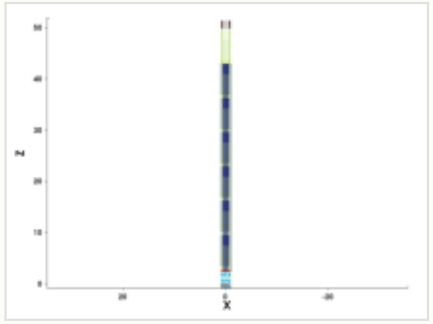

mask for this step

no mask for this step

steps by process area

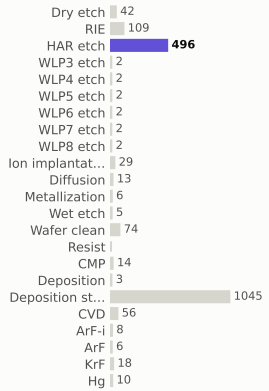

materials deposited (g)

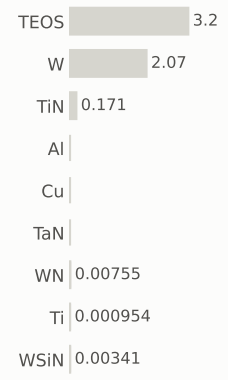

gases emitted (g)



Step #25146.443: HAR_etch

etch_noop · HAR_etch

1.04	2,744.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

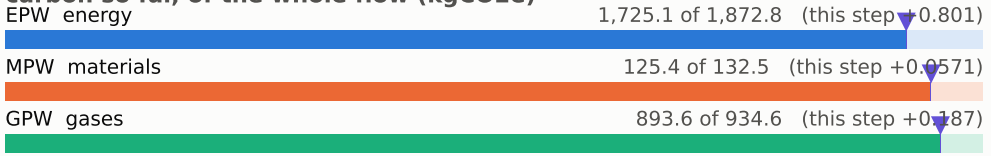

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

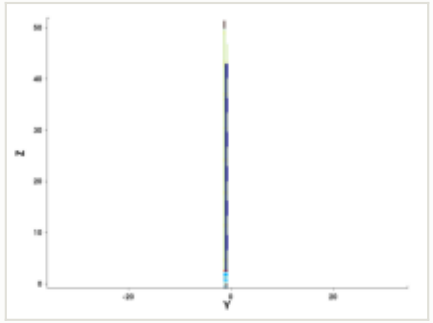

y cut at -1.035 µm

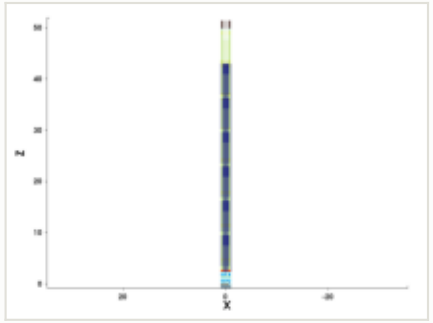

mask for this step

no mask for this step

steps by process area

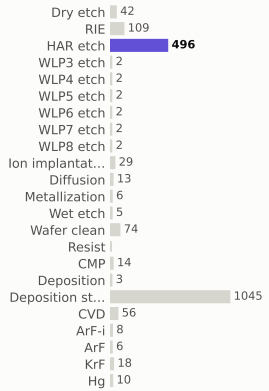

materials deposited (g)

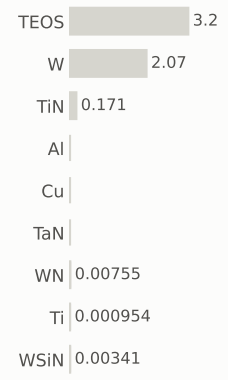

gases emitted (g)



Step #25146.5101: HAR_etch

etch_noop · HAR_etch

1.04	2,745.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

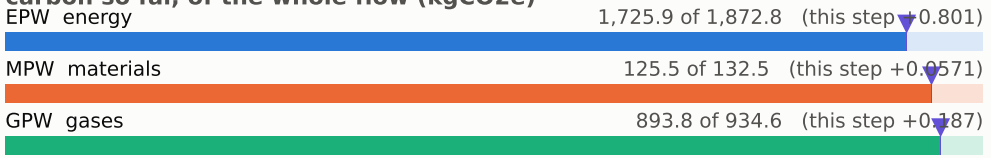

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

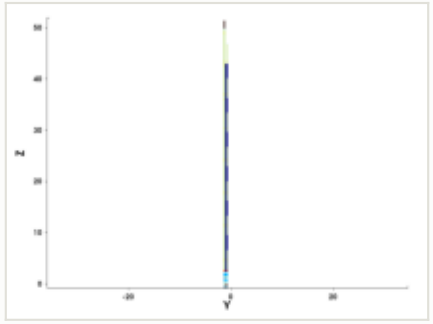

y cut at -1.035 µm

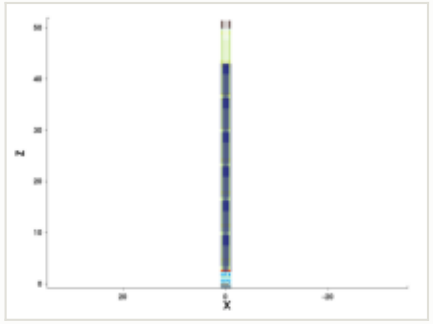

mask for this step

no mask for this step

steps by process area

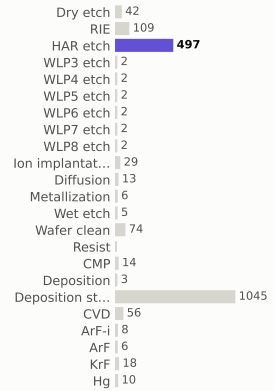

materials deposited (g)

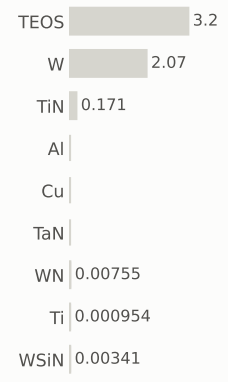

gases emitted (g)



Step #25146.5772: HAR_etch

etch_noop · HAR_etch

1.04	2,746.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

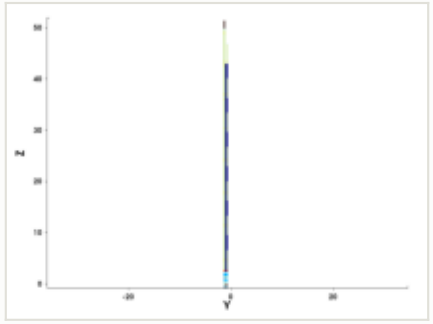

y cut at -1.035 µm

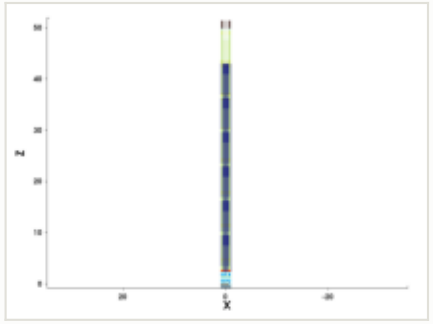

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

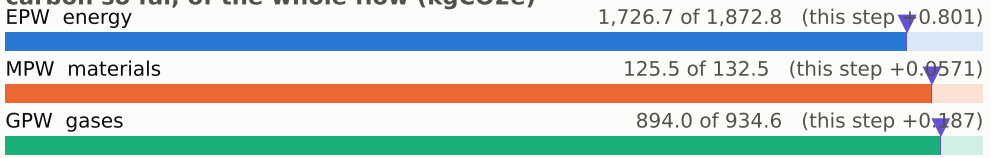

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

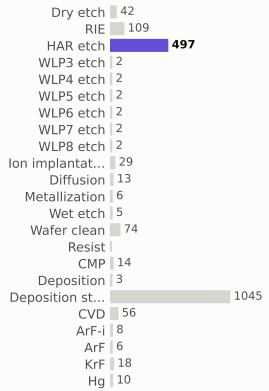

materials deposited (g)

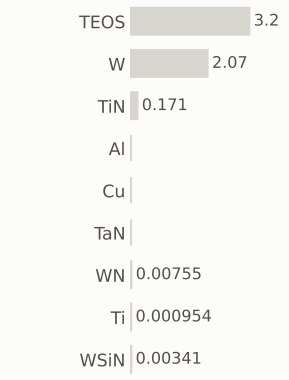

gases emitted (g)



Step #25146.6443: HAR_etch

etch_noop · HAR_etch

1.04	2,747.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

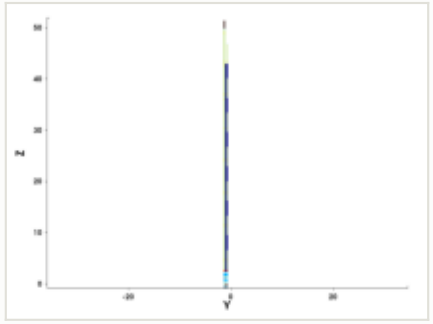

y cut at -1.035 µm

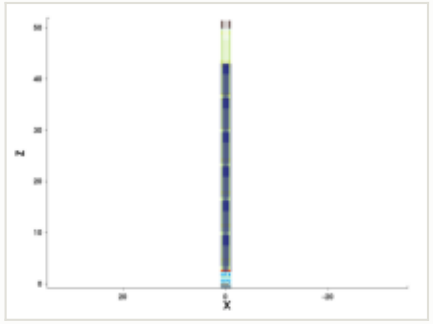

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

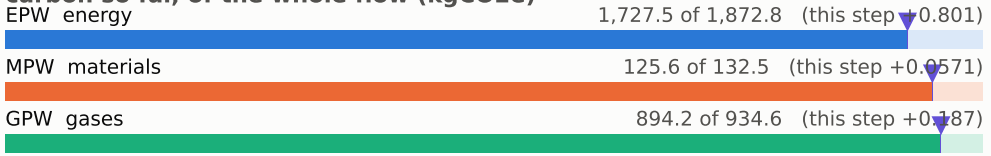

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

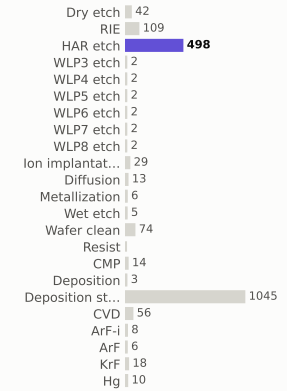

materials deposited (g)

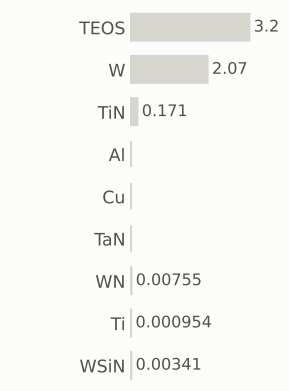

gases emitted (g)

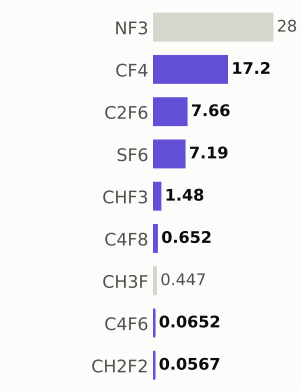

Step #25146.7114: HAR_etch

etch_noop · HAR_etch

1.04	2,748.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

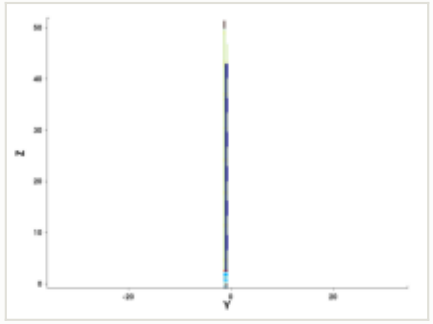

y cut at -1.035 µm

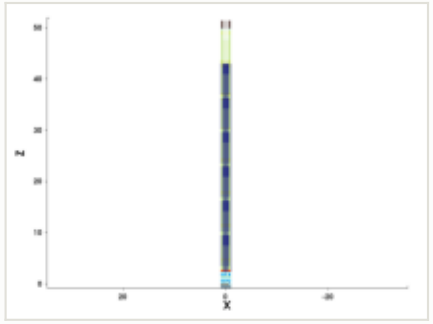

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

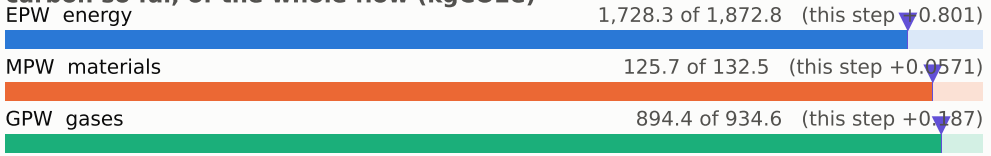

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

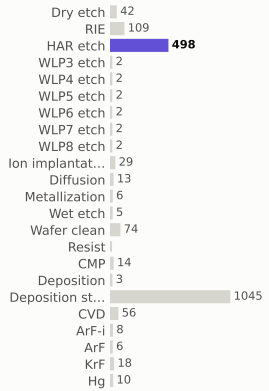

materials deposited (g)

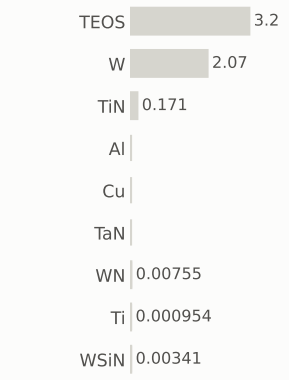

gases emitted (g)



Step #25146.7785: HAR_etch

etch_noop · HAR_etch

1.04	2,749.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

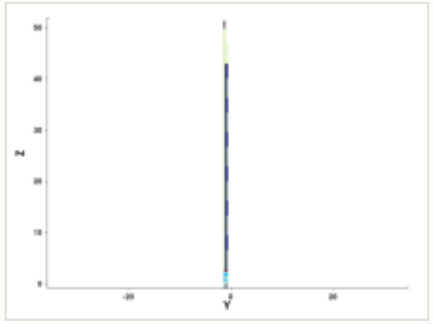

y cut at -1.035 µm

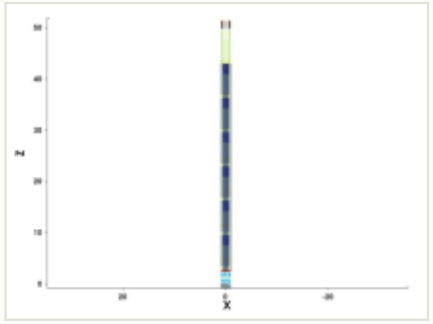

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

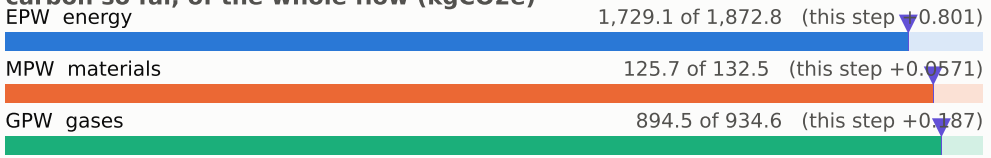

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

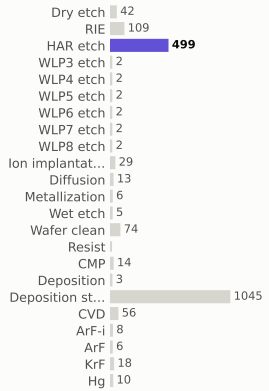

materials deposited (g)

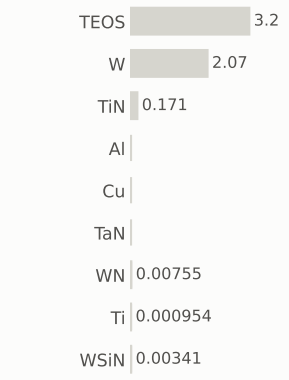

gases emitted (g)



Step #25146.8456: HAR_etch

etch_noop · HAR_etch

1.04	2,750.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

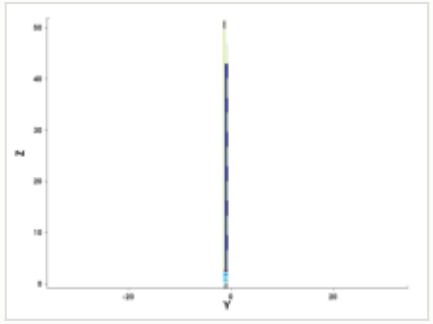

y cut at -1.035 µm

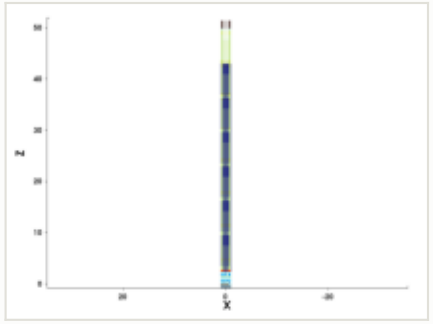

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

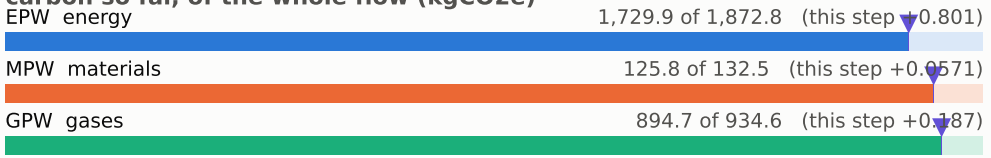

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

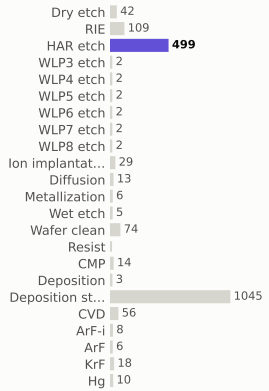

materials deposited (g)

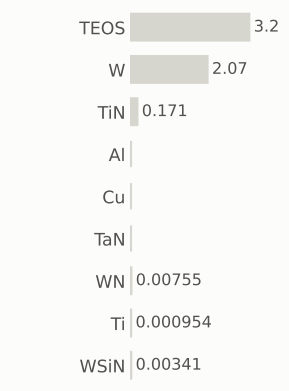

gases emitted (g)



Step #25146.9128: HAR_etch

etch_noop · HAR_etch

1.04	2,751.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

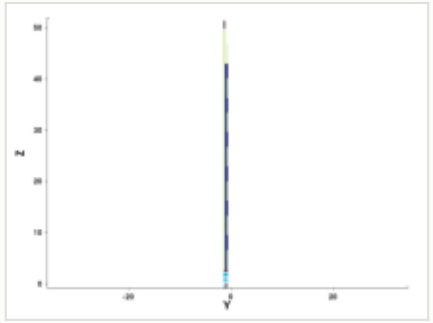

y cut at -1.035 µm

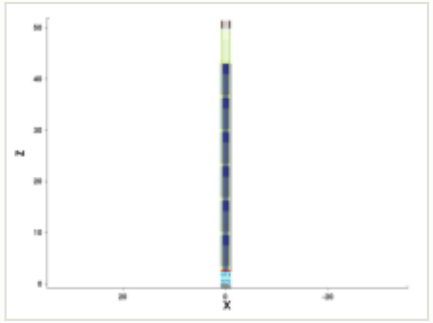

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

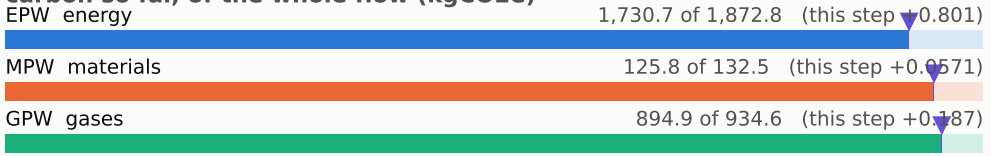

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

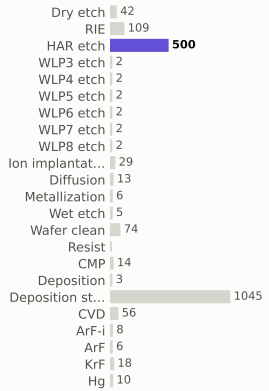

materials deposited (g)

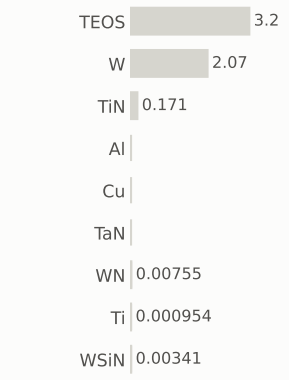

gases emitted (g)



Step #25146.9799: HAR_etch

etch_noop · HAR_etch

1.04	2,752.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

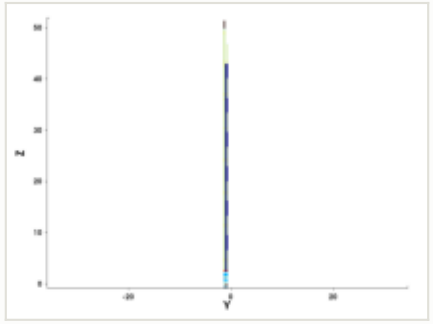

y cut at -1.035 µm

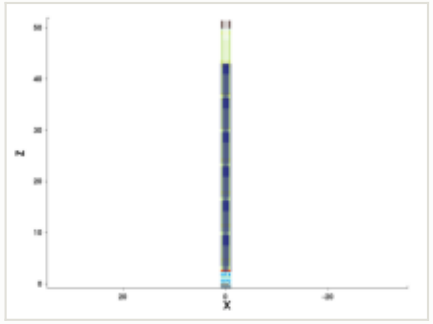

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

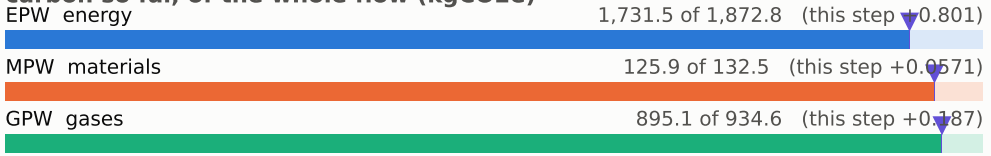

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

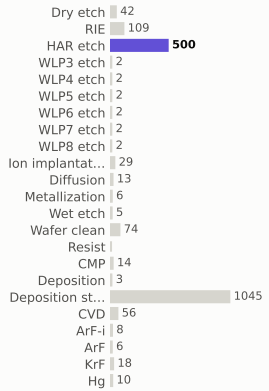

materials deposited (g)

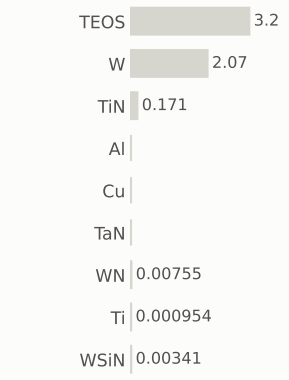

gases emitted (g)



Step #25147.047: HAR_etch

etch_noop · HAR_etch

1.04	2,753.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

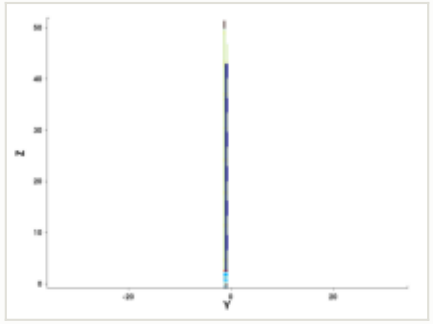

y cut at -1.035 µm

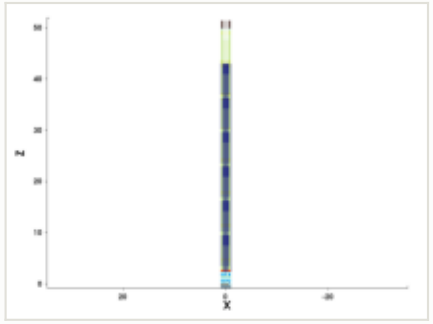

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

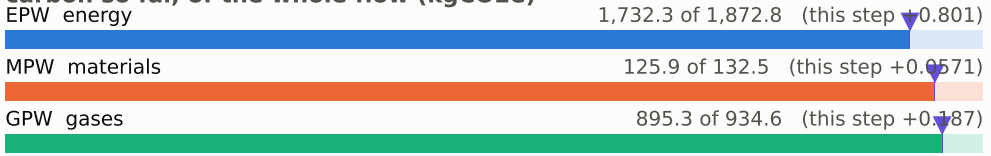

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

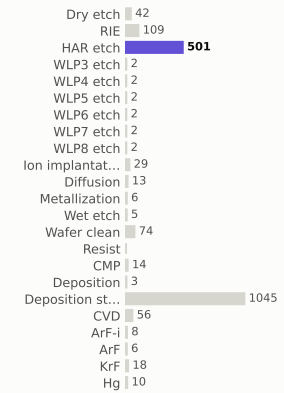

materials deposited (g)

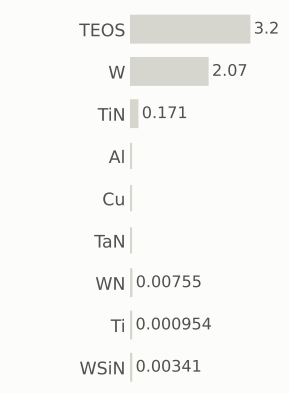

gases emitted (g)



Step #25147.1141: HAR_etch

etch_noop · HAR_etch

1.04	2,754.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at 0.000 µm

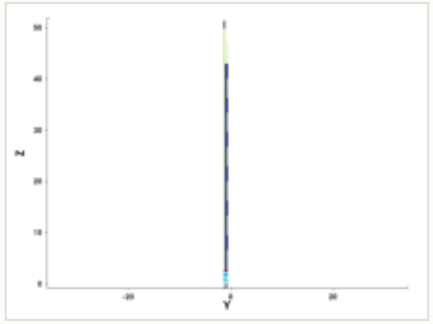

y cut at -1.035 µm

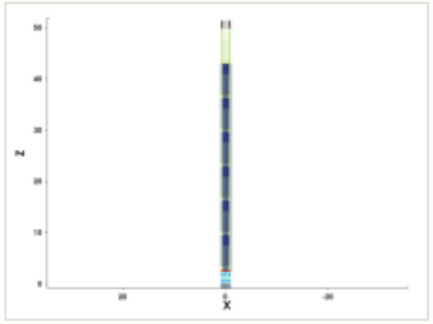

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

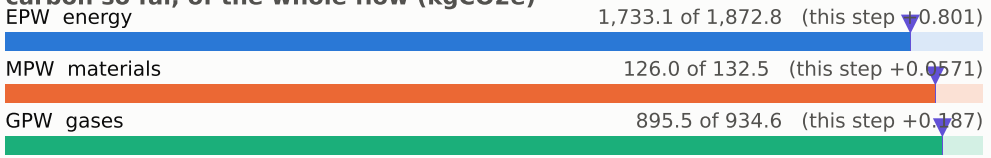

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

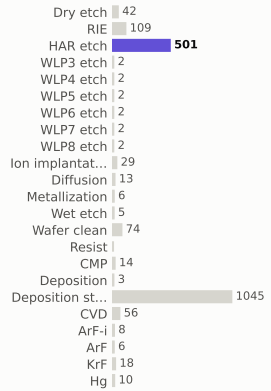

materials deposited (g)

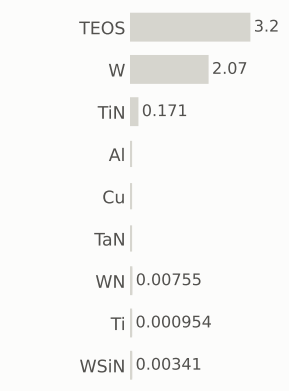

gases emitted (g)

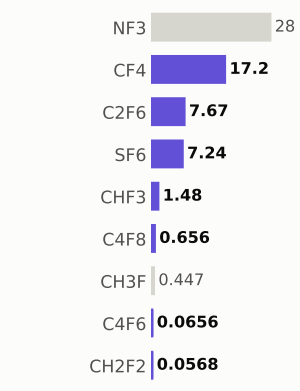

Step #25147.1812: HAR_etch

etch_noop · HAR_etch

1.04	2,755.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

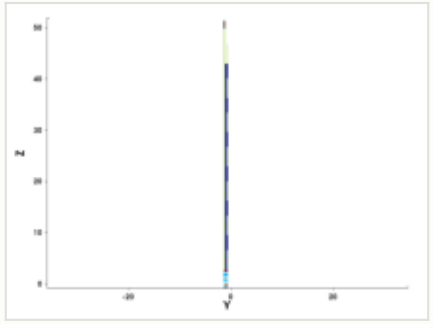

y cut at -1.035 µm

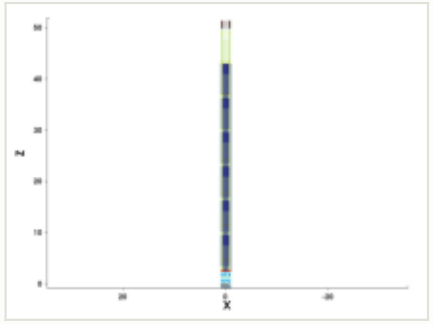

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

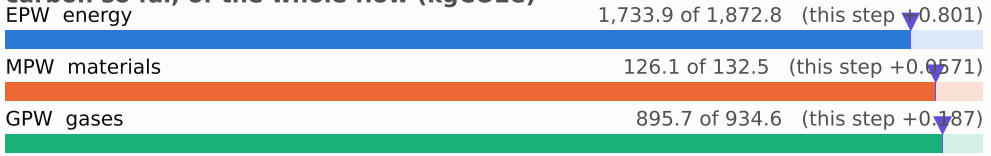

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

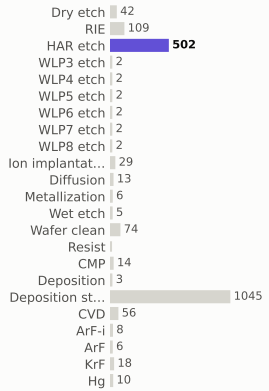

materials deposited (g)

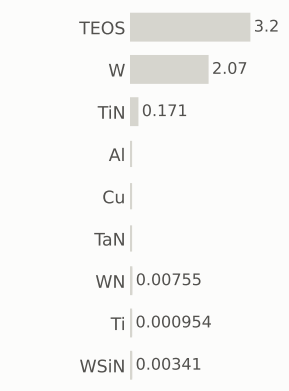

gases emitted (g)

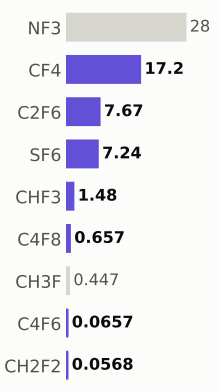

Step #25147.2483: HAR_etch

etch_noop · HAR_etch

1.04	2,756.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

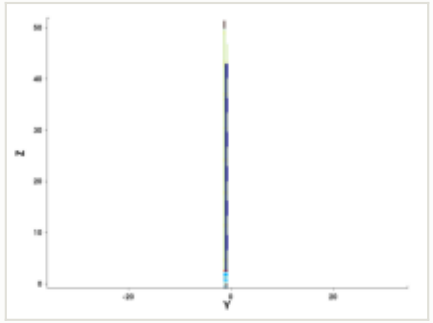

y cut at -1.035 µm

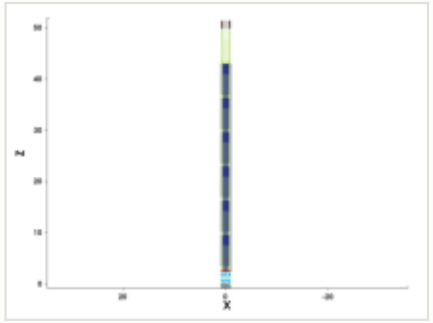

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

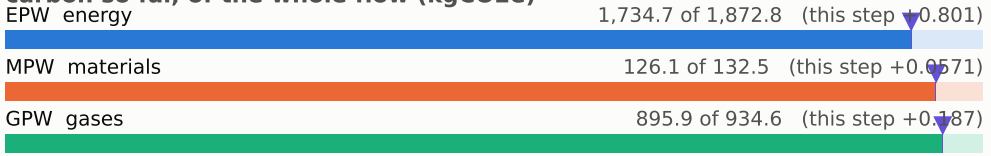

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

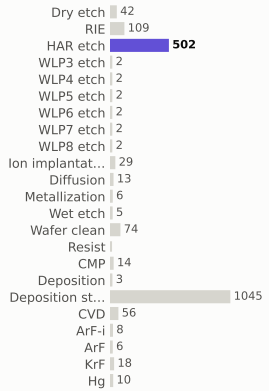

materials deposited (g)

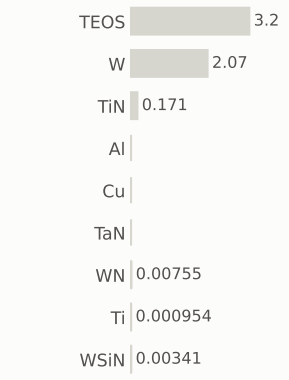

gases emitted (g)



Step #25147.3154: HAR_etch

etch_noop · HAR_etch

1.04	2,757.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

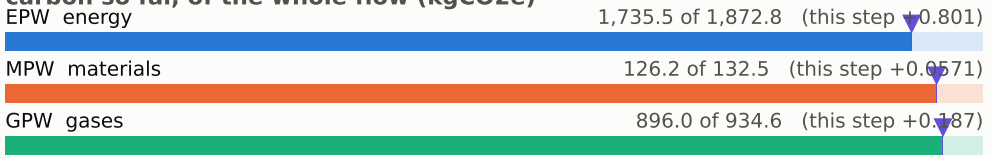

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

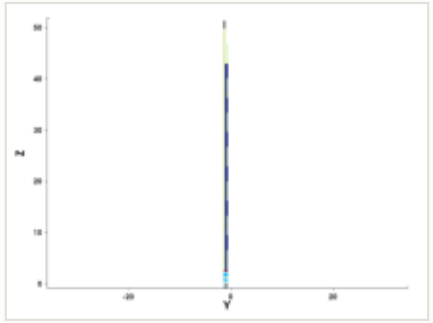

y cut at -1.035 µm

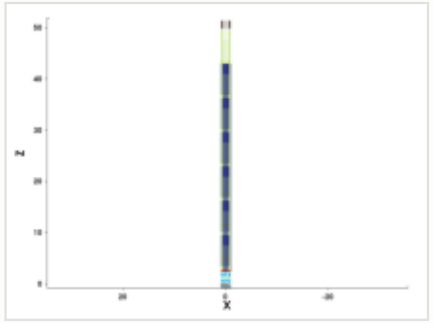

mask for this step

no mask for this step

steps by process area

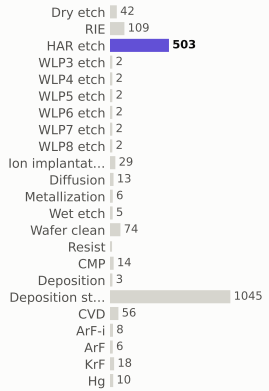

materials deposited (g)

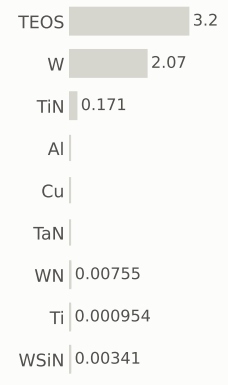

gases emitted (g)



Step #25147.3826: HAR_etch

etch_noop · HAR_etch

1.04	2,758.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

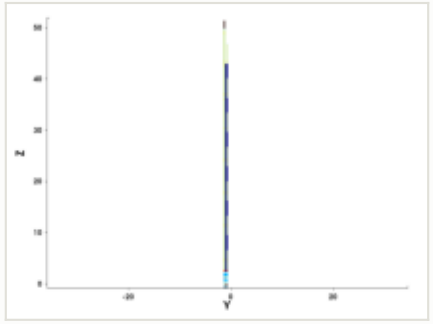

y cut at -1.035 µm

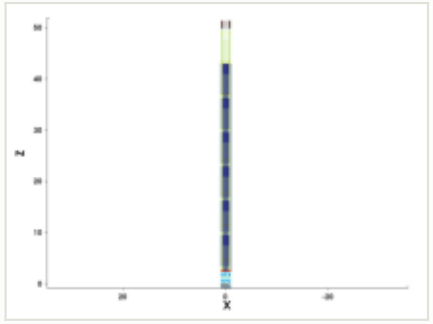

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

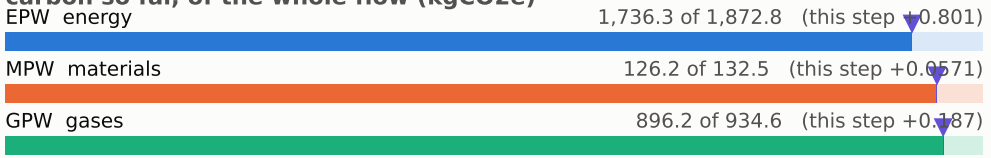

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

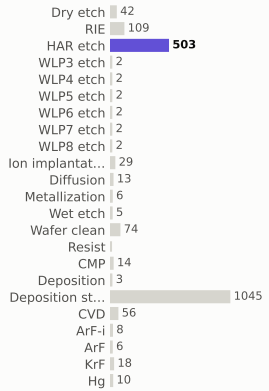

materials deposited (g)

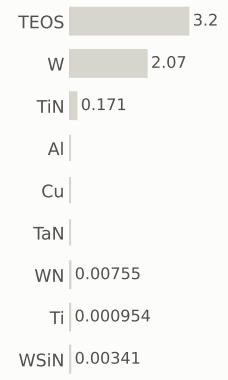

gases emitted (g)



Step #25147.4497: HAR_etch

etch_noop · HAR_etch

1.04	2,759.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

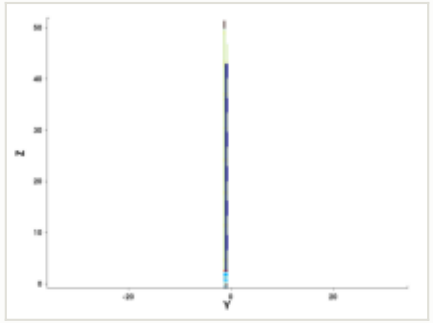

y cut at -1.035 µm

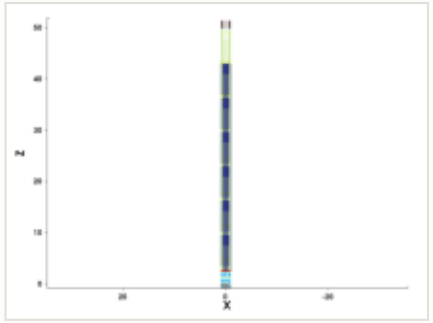

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

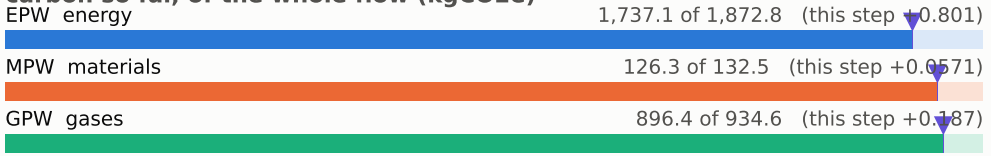

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

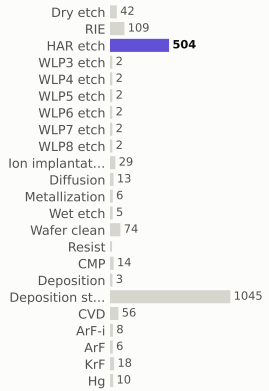

materials deposited (g)

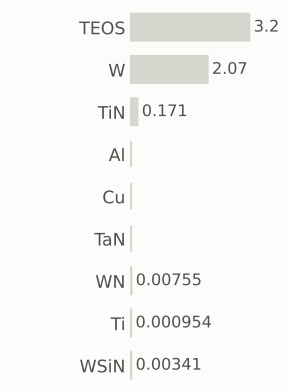

gases emitted (g)

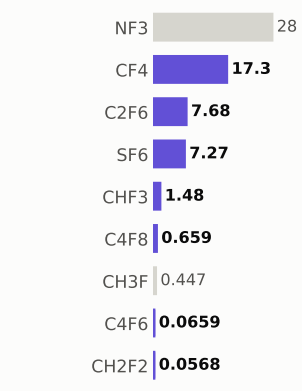

Step #25147.5168: HAR_etch

etch_noop · HAR_etch

1.04	2,760.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

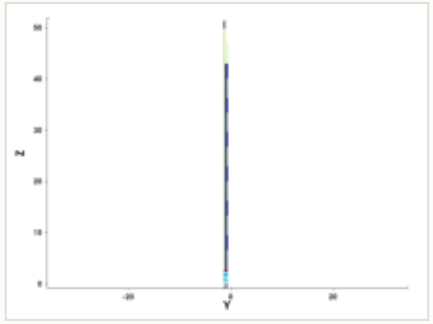

y cut at -1.035 µm

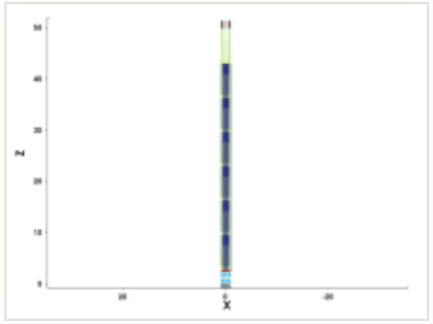

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

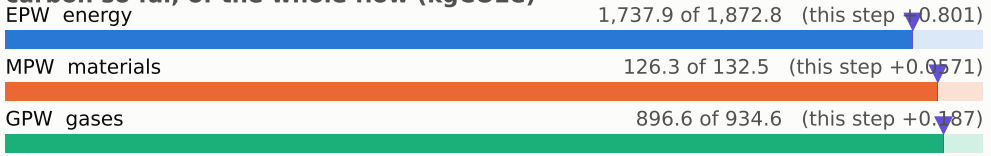

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

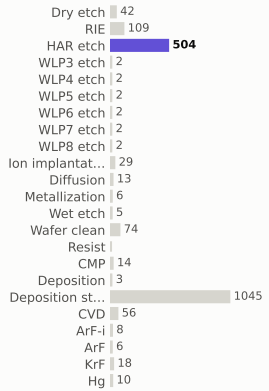

materials deposited (g)

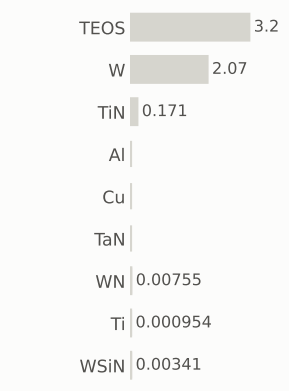

gases emitted (g)

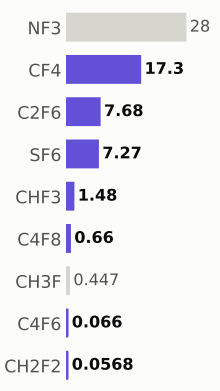

Step #25147.5839: HAR_etch

etch_noop · HAR_etch

1.04	2,761.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

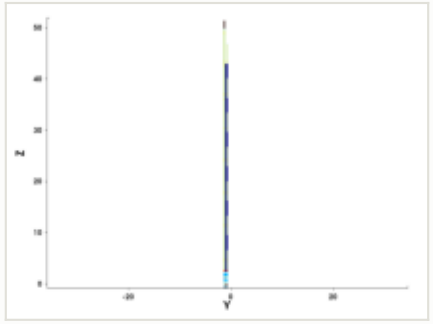

y cut at -1.035 µm

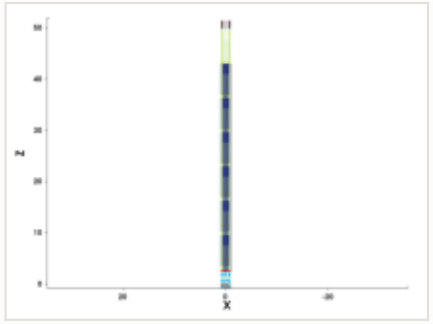

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

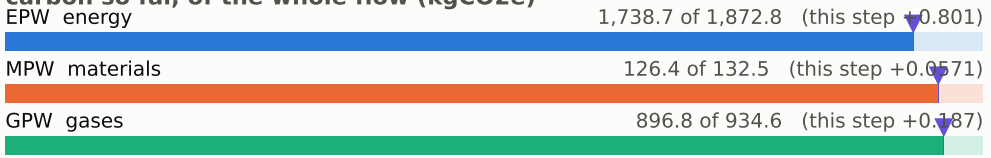

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

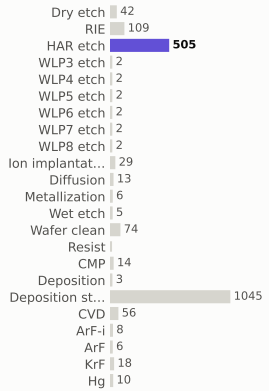

materials deposited (g)

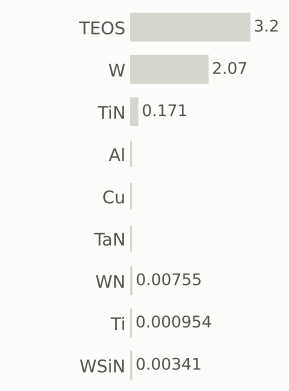

gases emitted (g)

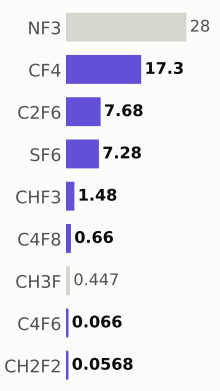

Step #25147.651: HAR_etch

etch_noop · HAR_etch

1.04	2,763.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

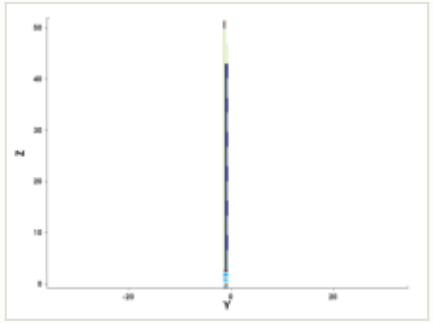

y cut at -1.035 µm

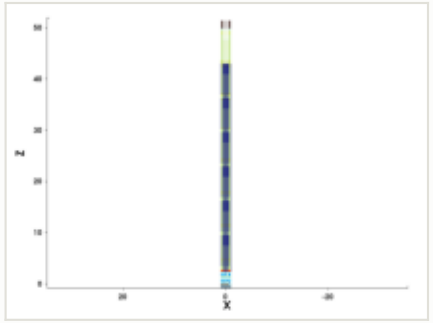

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

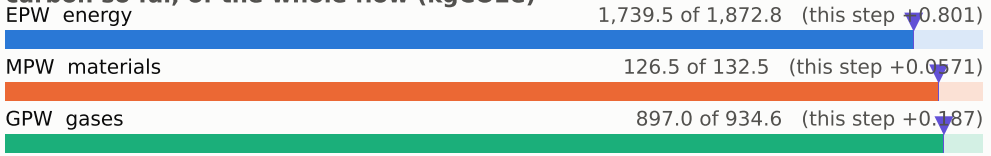

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

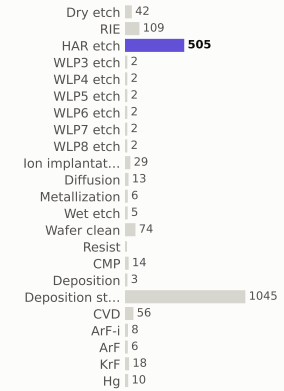

materials deposited (g)

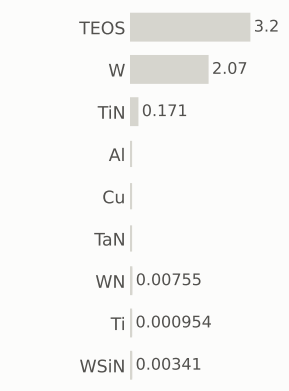

gases emitted (g)



Step #25147.7181: HAR_etch

etch_noop · HAR_etch

1.04	2,764.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

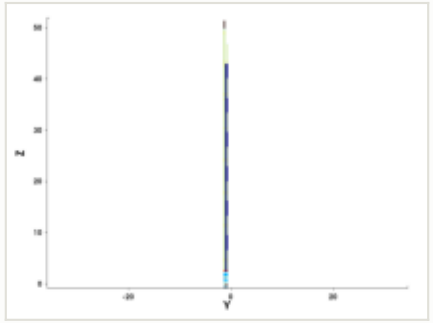

y cut at -1.035 µm

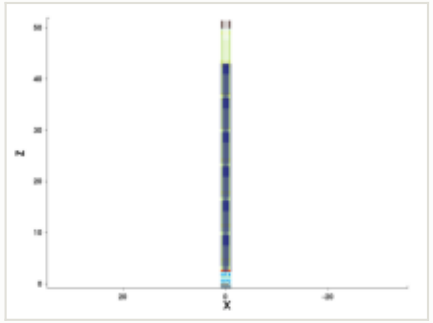

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

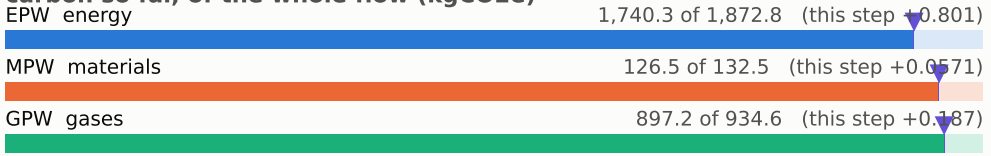

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

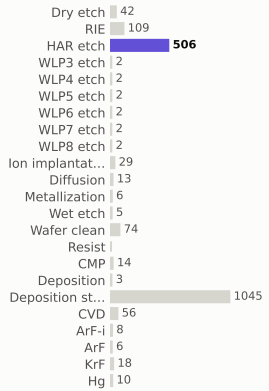

materials deposited (g)

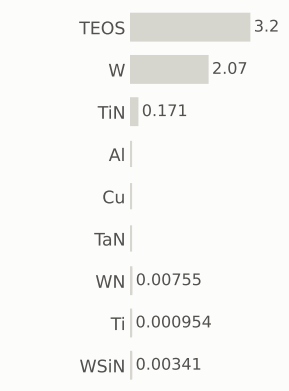

gases emitted (g)



Step #25147.7852: HAR_etch

etch_noop · HAR_etch

1.04	2,765.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

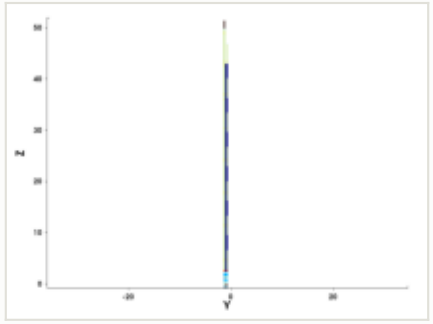

y cut at -1.035 µm

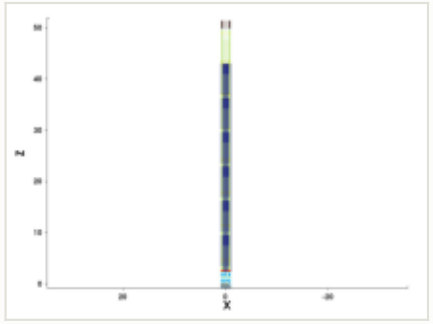

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

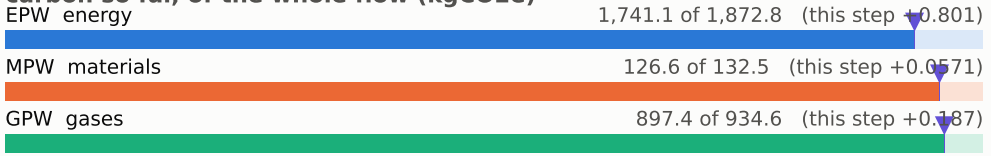

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

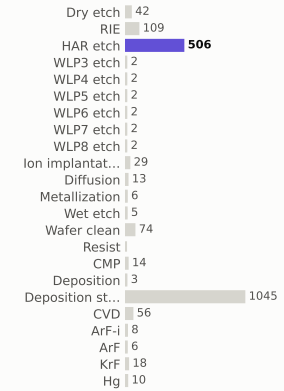

materials deposited (g)

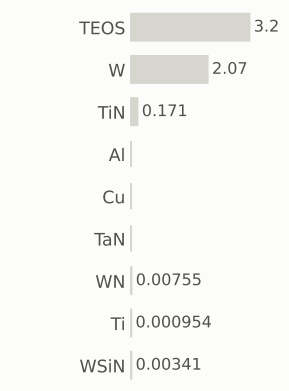

gases emitted (g)

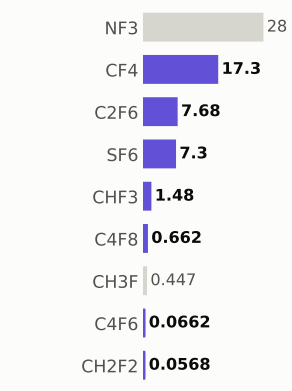

Step #25147.8523: HAR_etch

etch_noop · HAR_etch

1.04	2,766.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

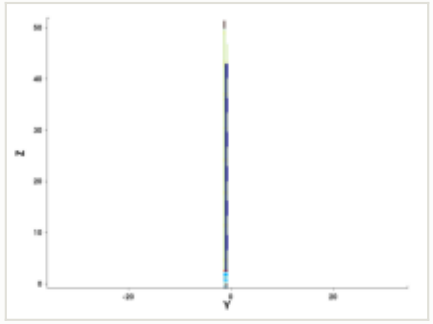

y cut at -1.035 µm

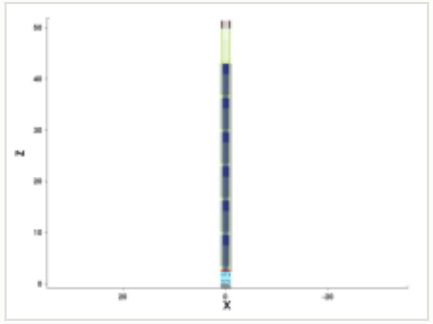

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

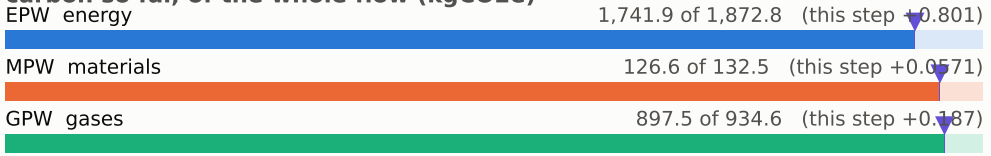

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

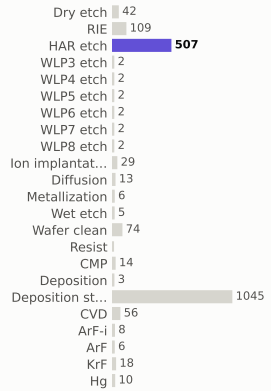

materials deposited (g)

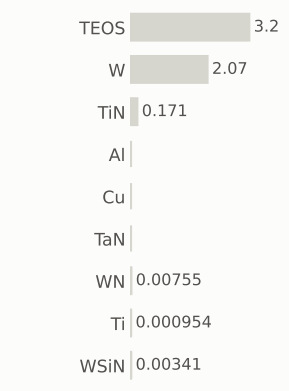

gases emitted (g)

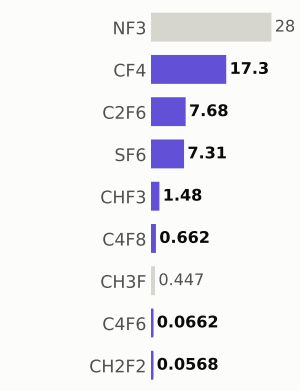

Step #25147.9195: HAR_etch

etch_noop · HAR_etch

1.04	2,767.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

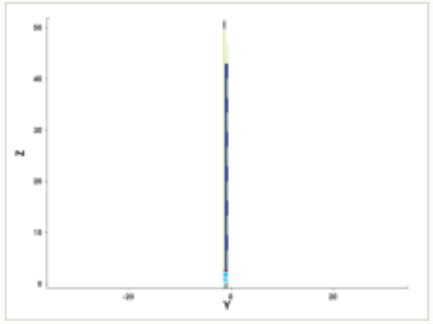

y cut at -1.035 µm

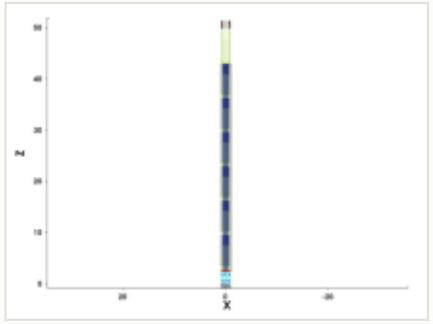

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

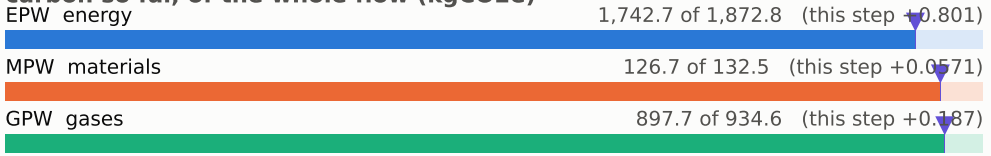

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

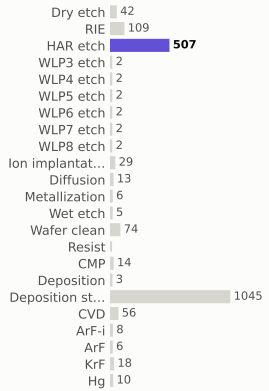

materials deposited (g)

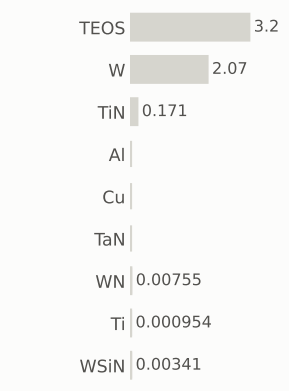

gases emitted (g)

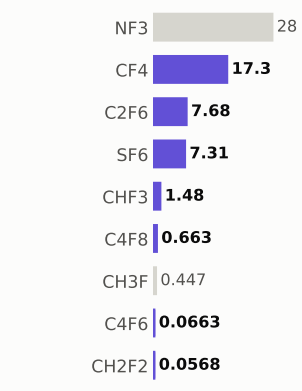

Step #25147.9866: HAR_etch

etch_noop · HAR_etch

1.04	2,768.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

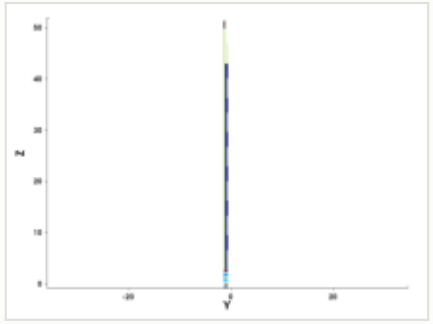

y cut at -1.035 µm

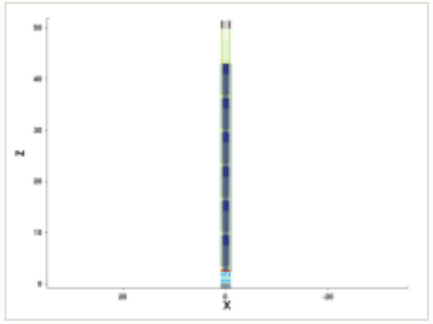

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

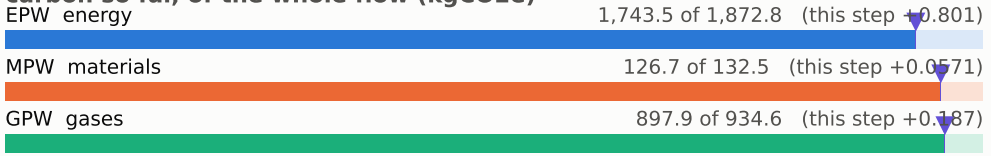

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

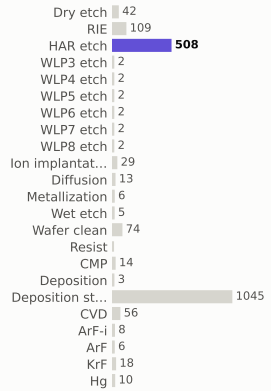

materials deposited (g)

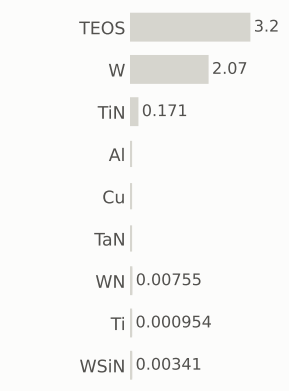

gases emitted (g)

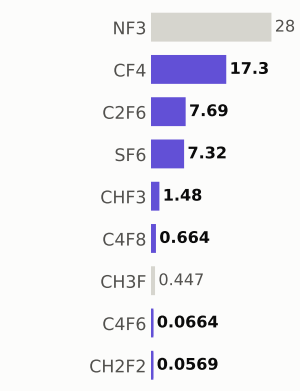

Step #25148.0537: HAR_etch

etch_noop · HAR_etch

1.04	2,769.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

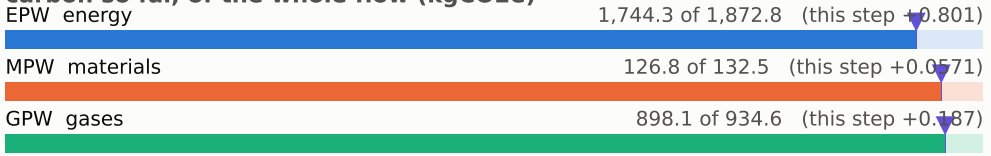

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

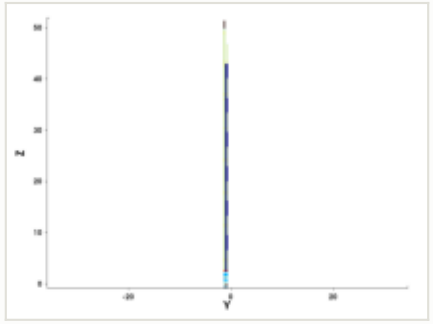

y cut at -1.035 µm

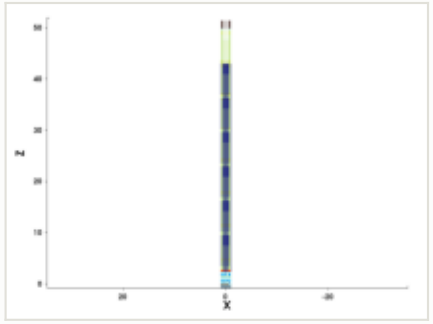

mask for this step

no mask for this step

steps by process area

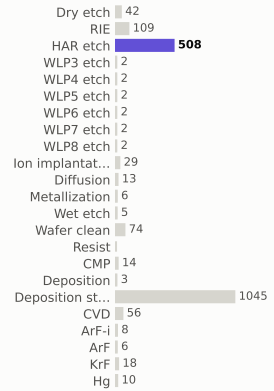

materials deposited (g)

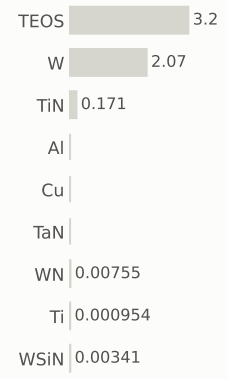

gases emitted (g)



Step #25148.1208: HAR_etch

etch_noop · HAR_etch

1.04	2,770.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

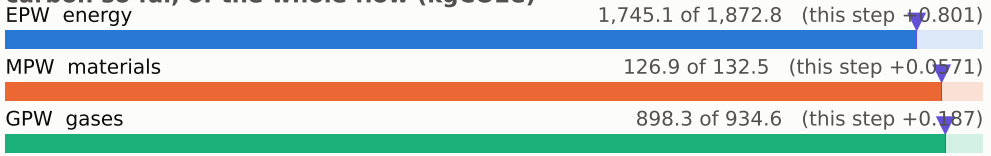

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

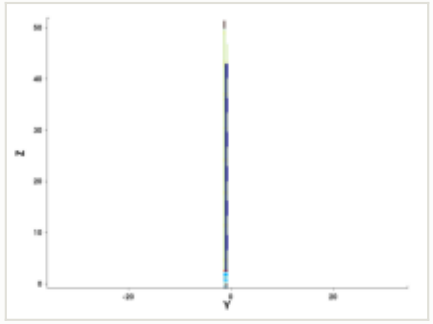

y cut at -1.035 µm

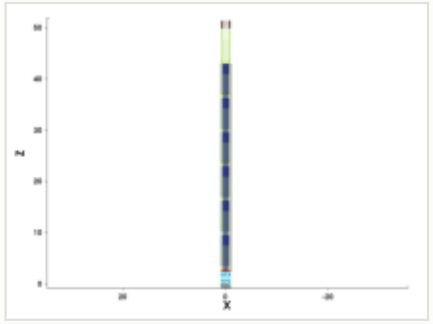

mask for this step

no mask for this step

steps by process area

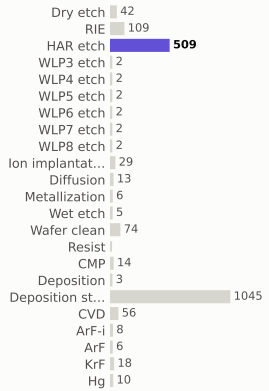

materials deposited (g)

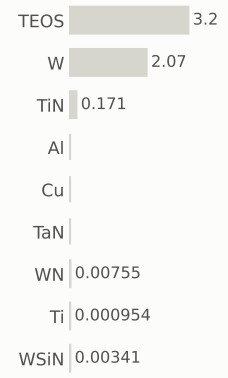

gases emitted (g)



Step #25148.1879: HAR_etch

etch_noop · HAR_etch

1.04	2,771.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

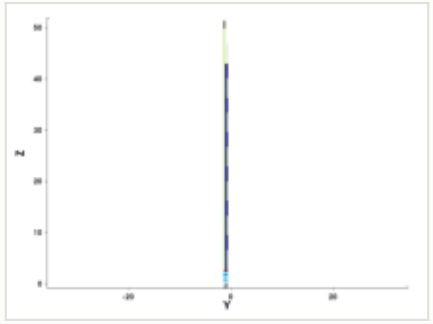

y cut at -1.035 µm

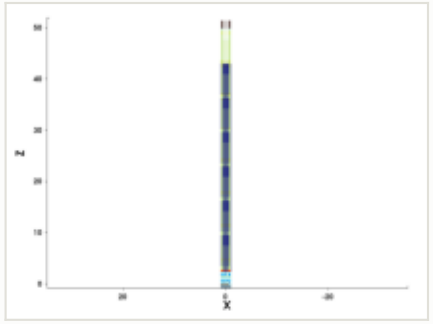

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

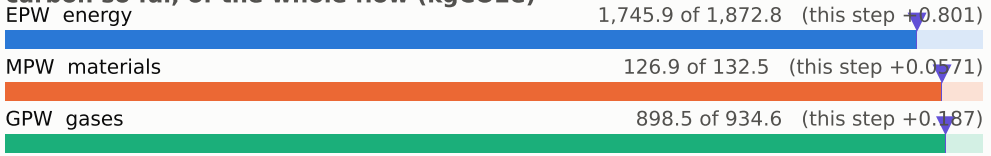

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

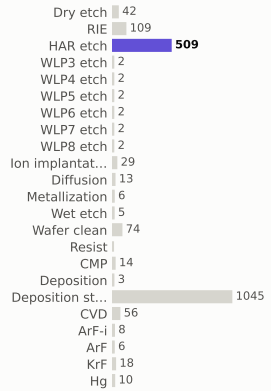

materials deposited (g)

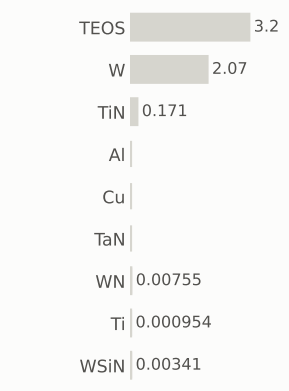

gases emitted (g)



Step #25148.255: HAR_etch

etch_noop · HAR_etch

1.04	2,772.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

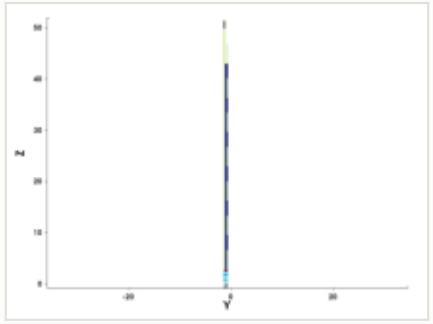

y cut at -1.035 µm

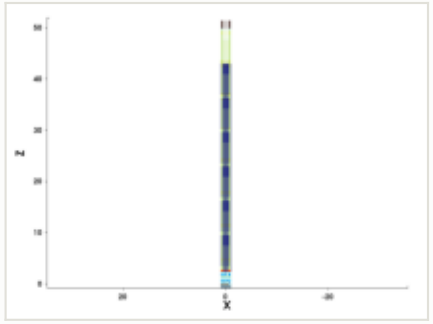

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

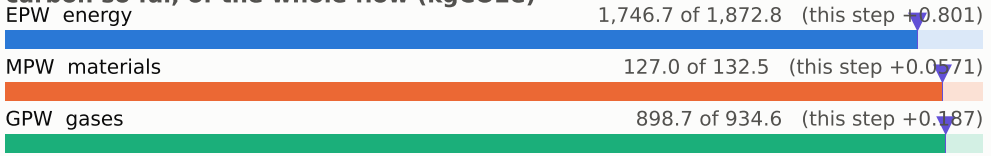

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

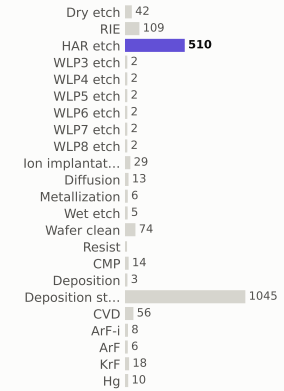

materials deposited (g)

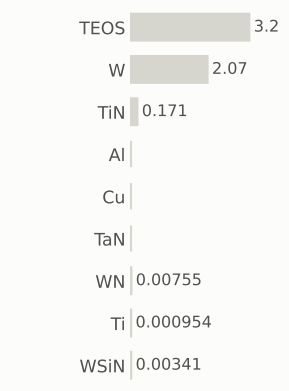

gases emitted (g)

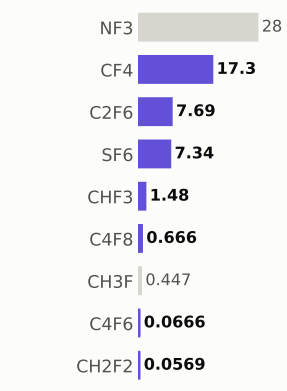

Step #25148.3221: HAR_etch

etch_noop · HAR_etch

1.04	2,773.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

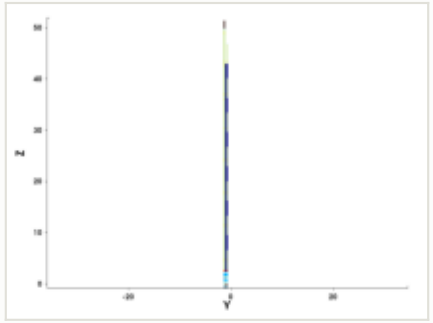

y cut at -1.035 µm

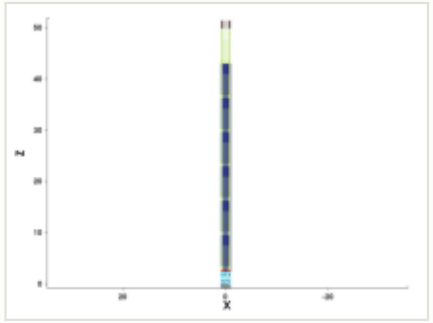

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

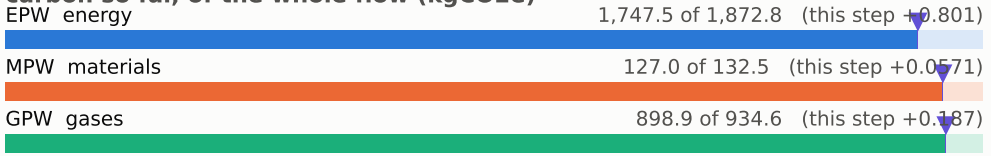

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

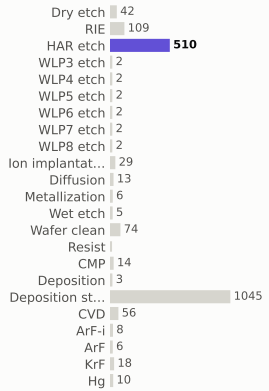

materials deposited (g)

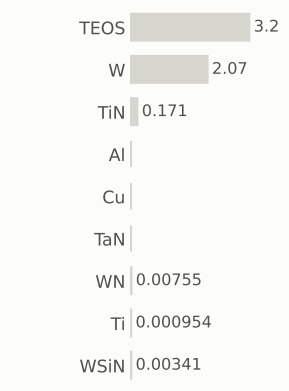

gases emitted (g)

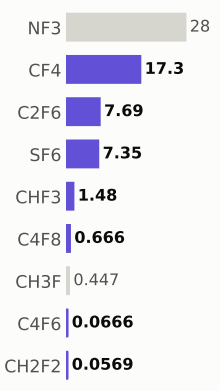

Step #25148.3893: HAR_etch

etch_noop · HAR_etch

1.04	2,774.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

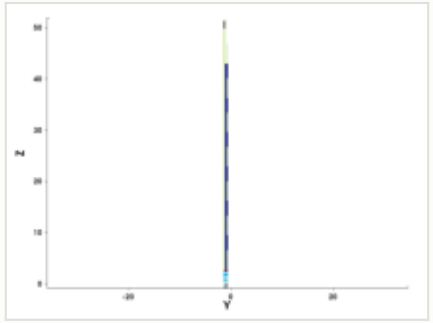

y cut at -1.035 µm

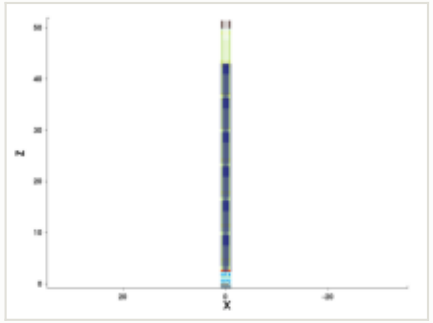

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

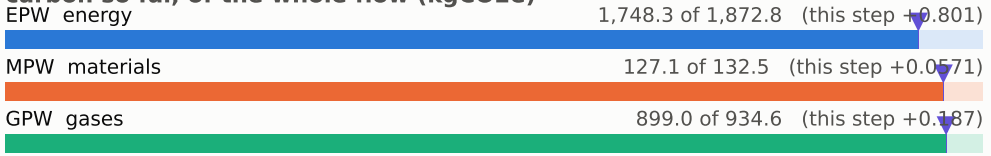

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

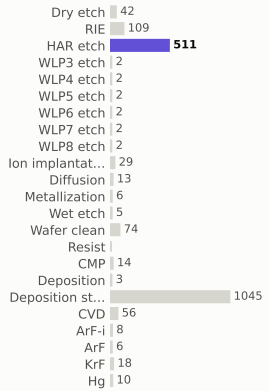

materials deposited (g)

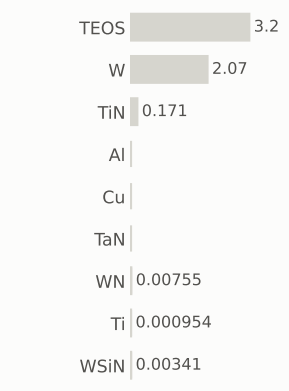

gases emitted (g)

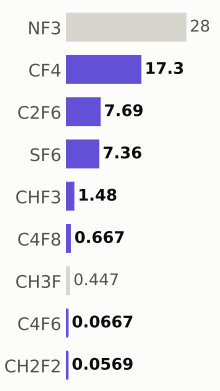

Step #25148.4564: HAR_etch

etch_noop · HAR_etch

1.04	2,775.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

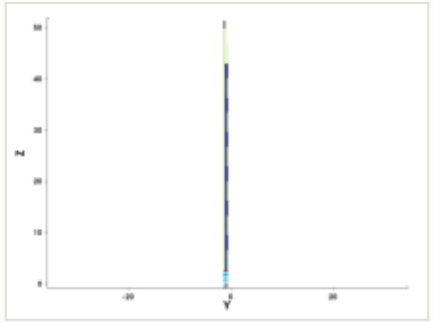

y cut at -1.035 µm

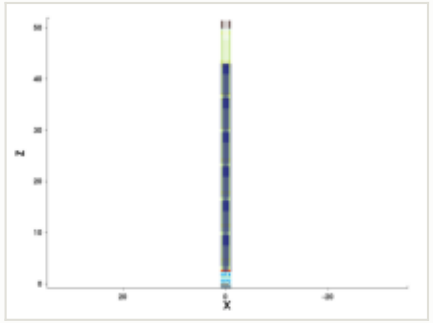

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

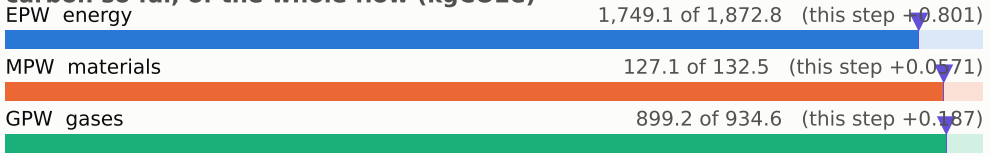

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

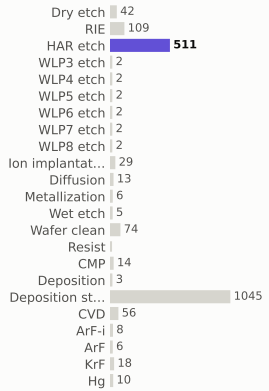

materials deposited (g)

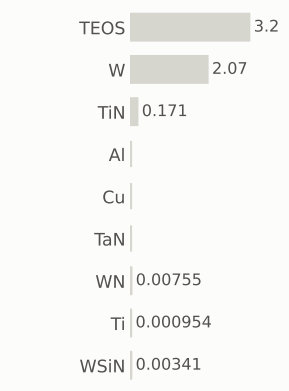

gases emitted (g)

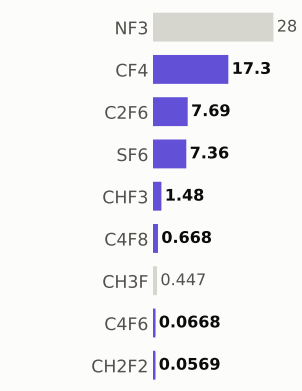

Step #25148.5235: HAR_etch

etch_noop · HAR_etch

1.04	2,776.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

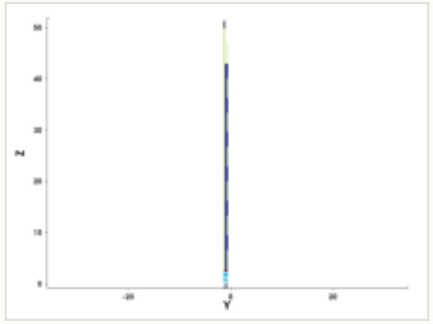

y cut at -1.035 µm

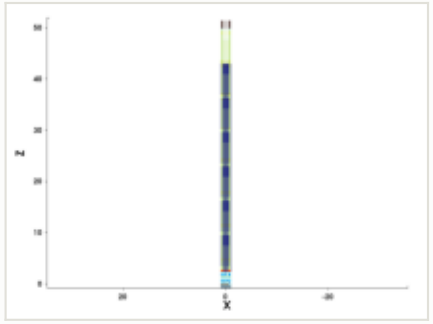

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

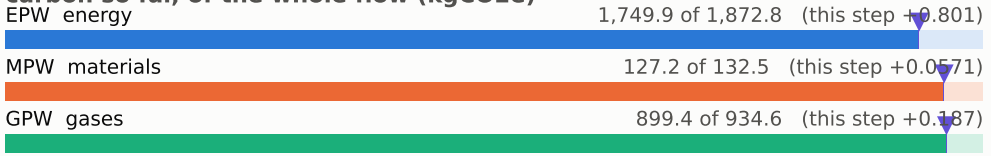

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

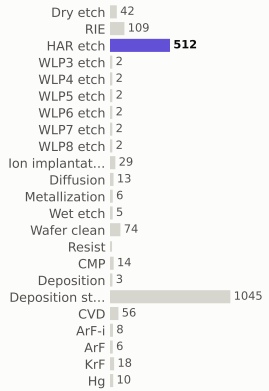

materials deposited (g)

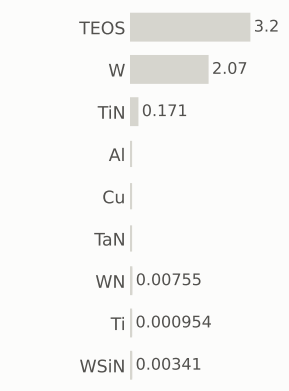

gases emitted (g)

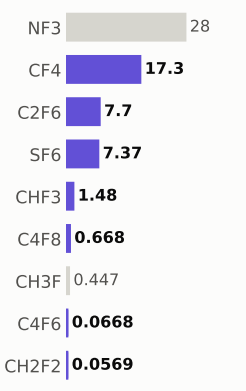

Step #25148.5906: HAR_etch

etch_noop · HAR_etch

1.04	2,777.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

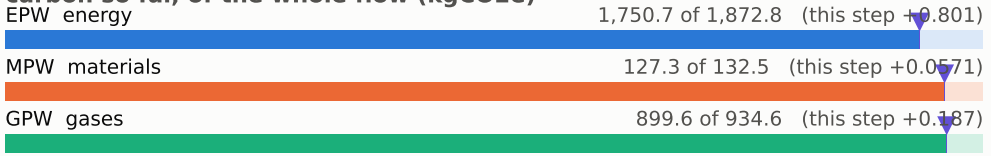

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

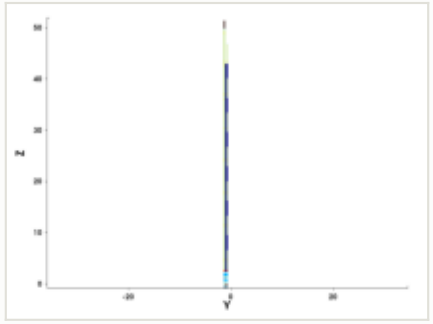

y cut at -1.035 µm

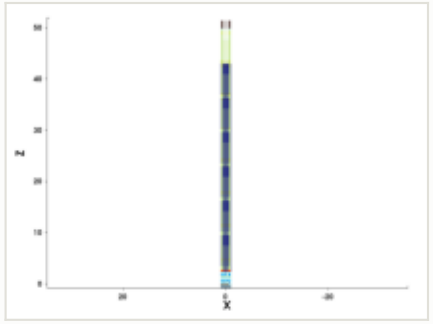

mask for this step

no mask for this step

steps by process area

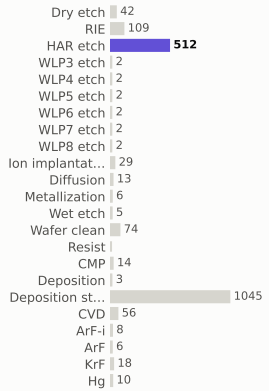

materials deposited (g)

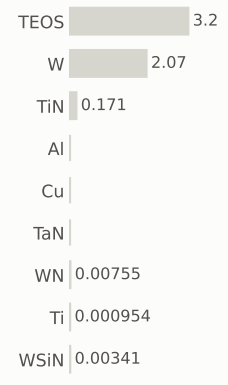

gases emitted (g)



Step #25148.6577: HAR_etch

etch_noop · HAR_etch

1.04	2,778.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

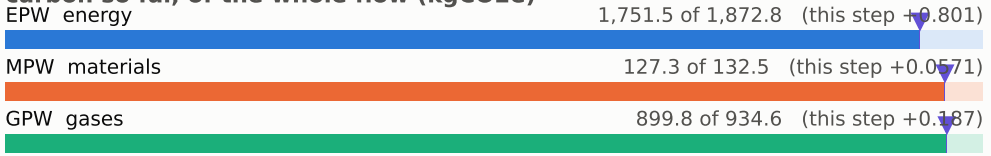

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

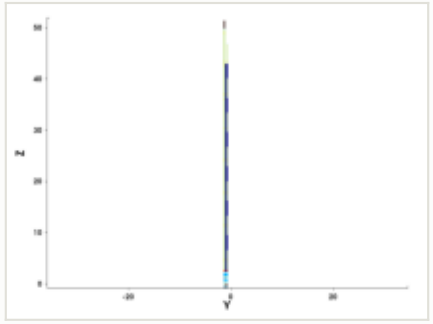

y cut at -1.035 µm

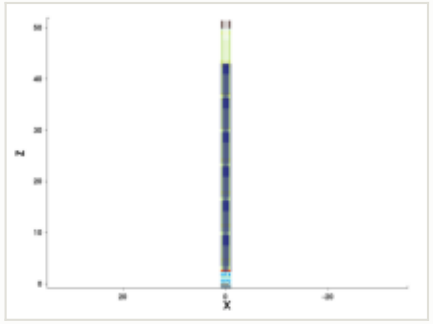

mask for this step

no mask for this step

steps by process area

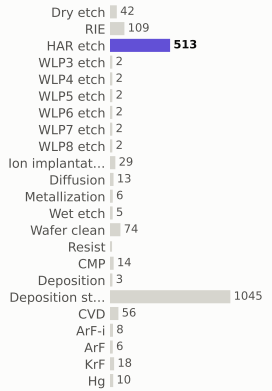

materials deposited (g)

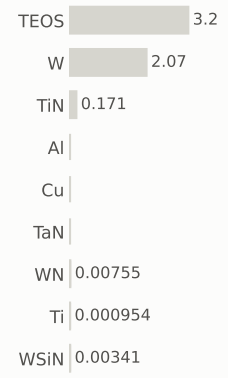

gases emitted (g)



Step #25148.7248: HAR_etch

etch_noop · HAR_etch

1.04	2,779.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

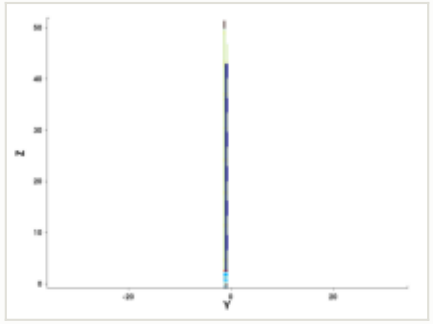

y cut at -1.035 µm

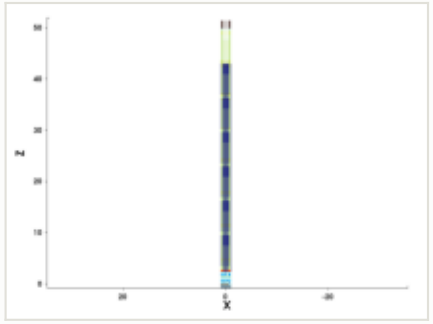

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

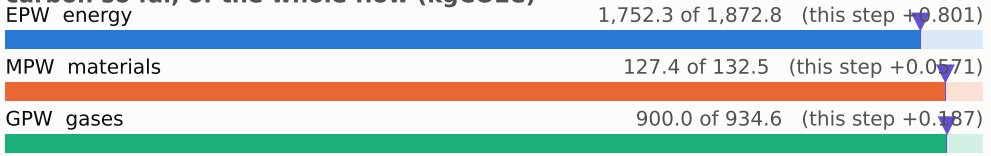

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

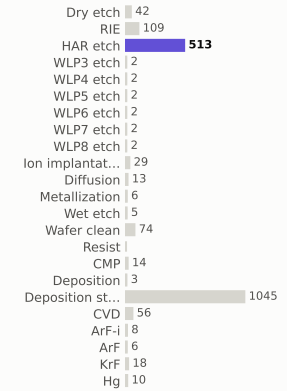

materials deposited (g)

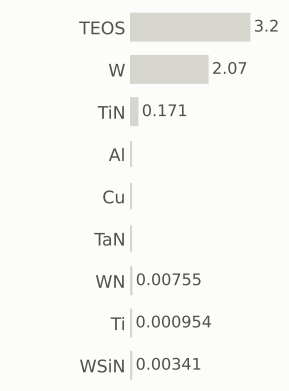

gases emitted (g)

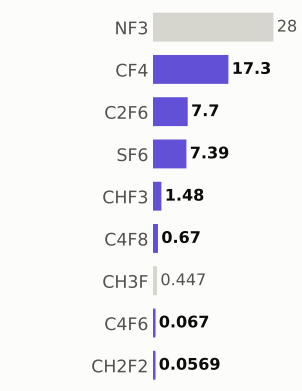

Step #25148.7919: HAR_etch

etch_noop · HAR_etch

1.04	2,780.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

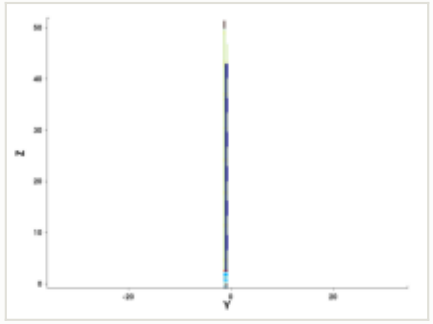

y cut at -1.035 µm

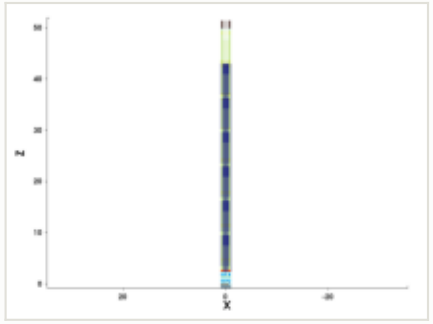

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

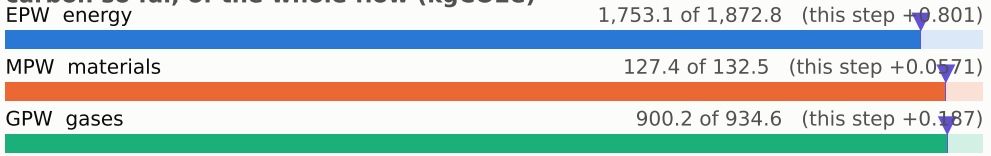

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

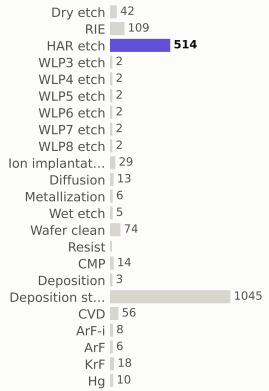

materials deposited (g)

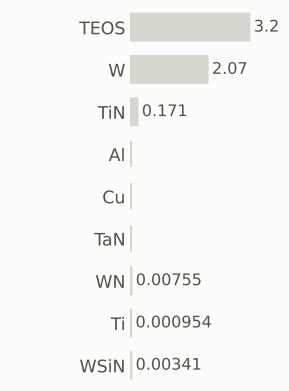

gases emitted (g)

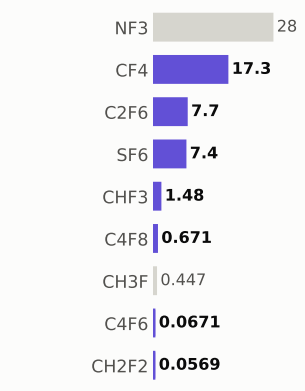

Step #25148.8591: HAR_etch

etch_noop · HAR_etch

1.04	2,781.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

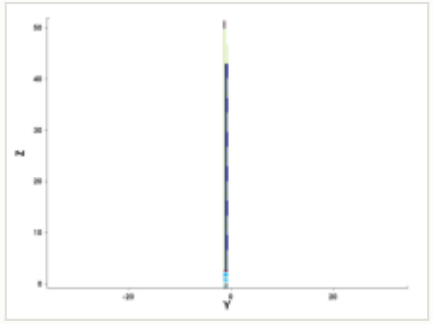

y cut at -1.035 µm

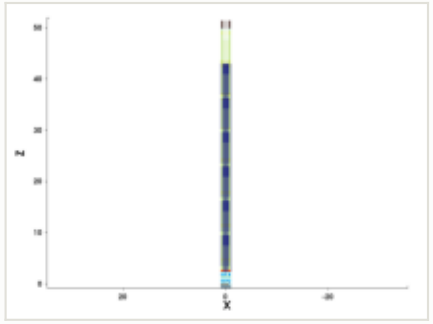

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

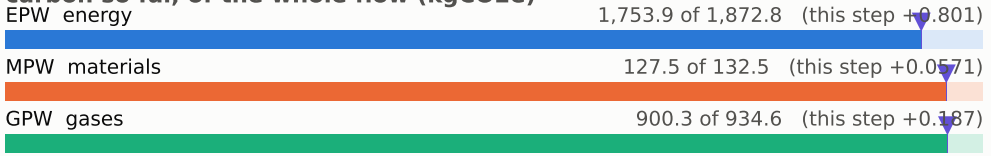

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

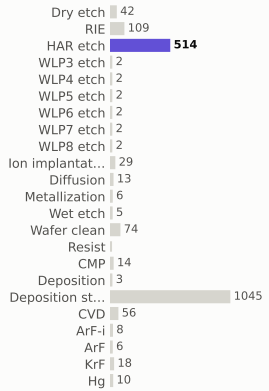

materials deposited (g)

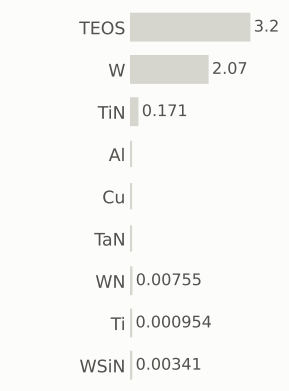

gases emitted (g)

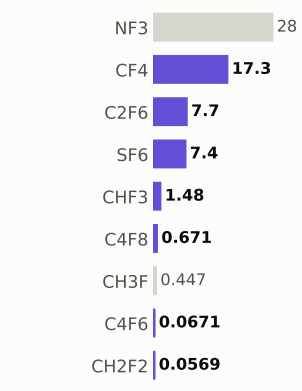

Step #25148.9262: HAR_etch

etch_noop · HAR_etch

1.04	2,782.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

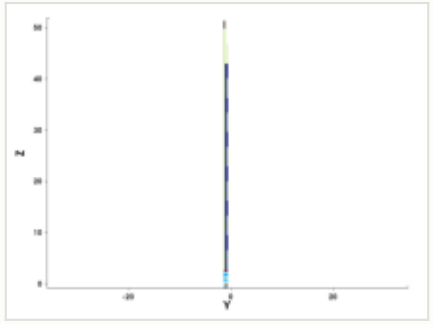

y cut at -1.035 µm

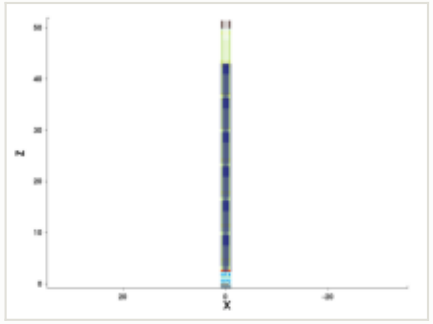

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

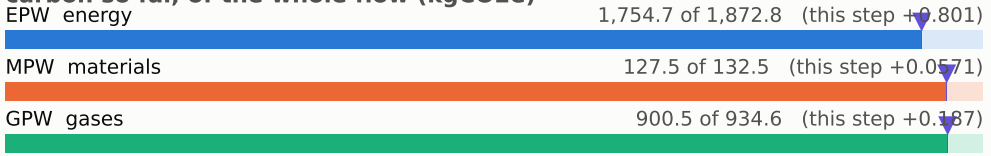

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

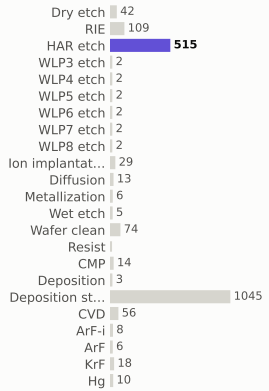

materials deposited (g)



gases emitted (g)



Step #25148.9933: HAR_etch

etch_noop · HAR_etch

1.04	2,783.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

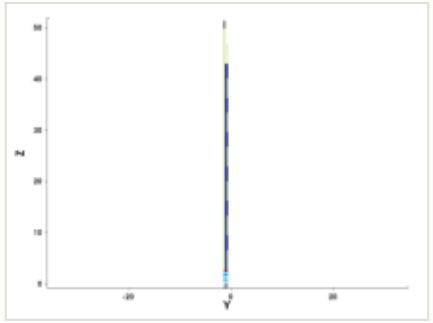

y cut at -1.035 µm

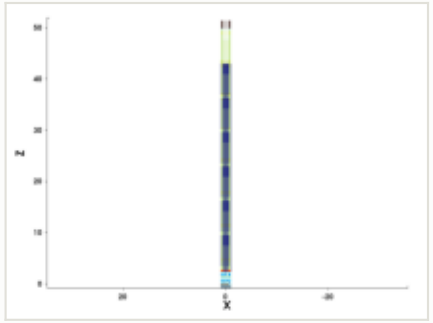

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

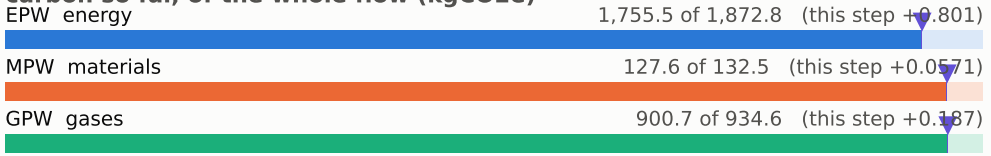

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

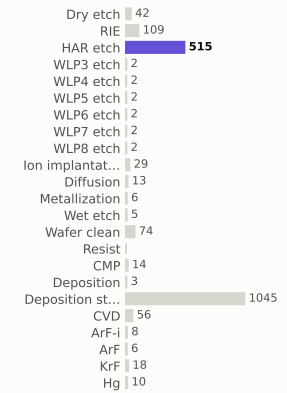

materials deposited (g)

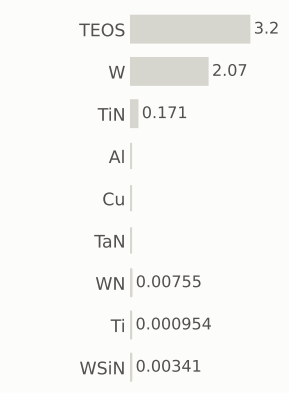

gases emitted (g)

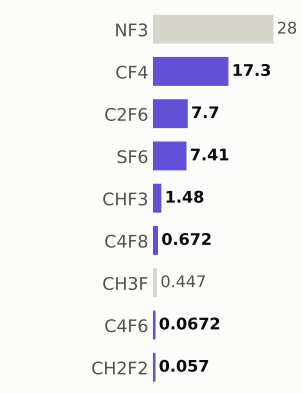

Step #25149.0604: HAR_etch

etch_noop · HAR_etch

1.04	2,784.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

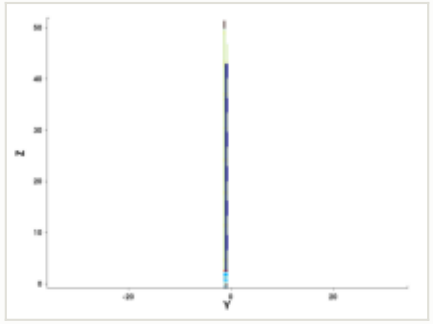

y cut at -1.035 µm

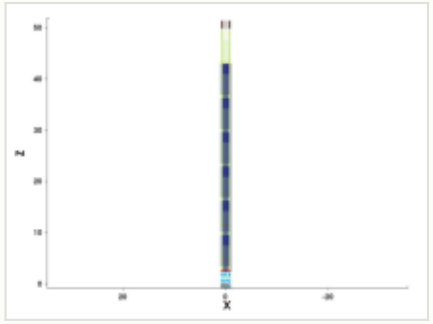

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

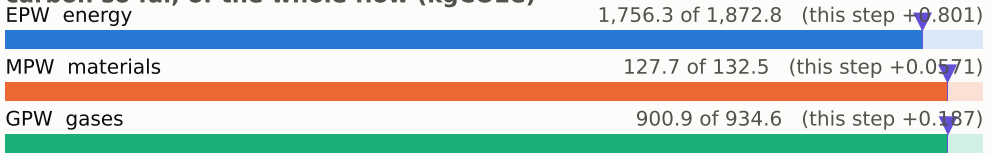

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

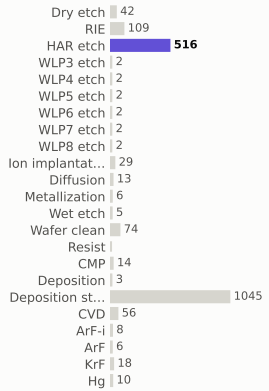

materials deposited (g)

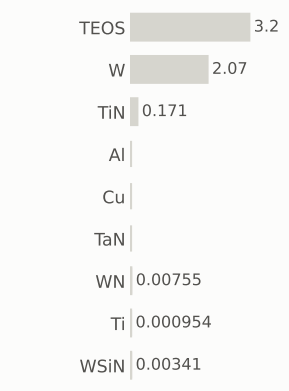

gases emitted (g)

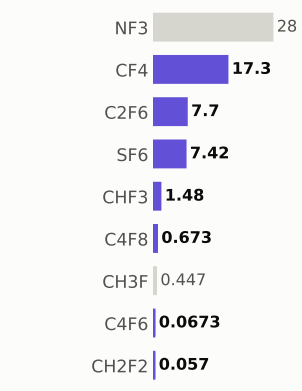

Step #25149.1275: HAR_etch

etch_noop · HAR_etch

1.04	2,786.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

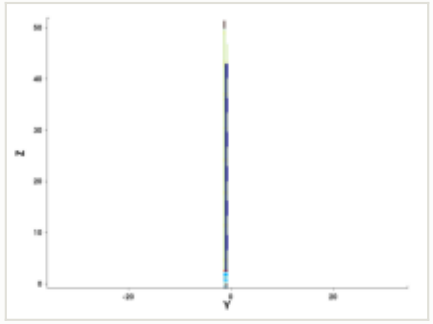

y cut at -1.035 µm

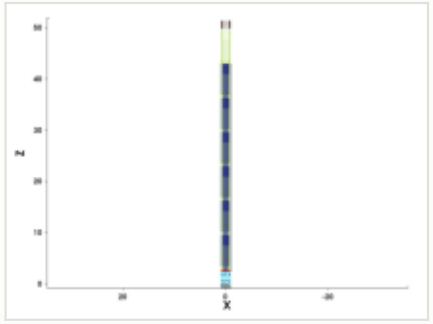

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

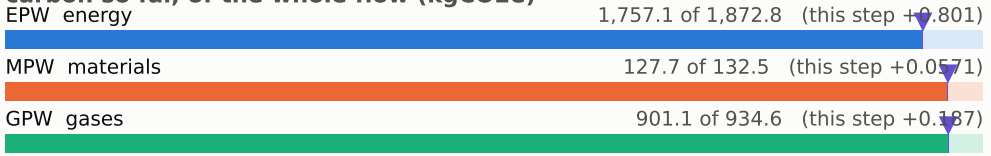

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

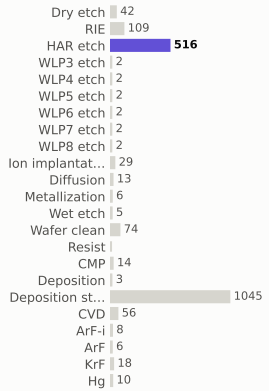

materials deposited (g)



gases emitted (g)

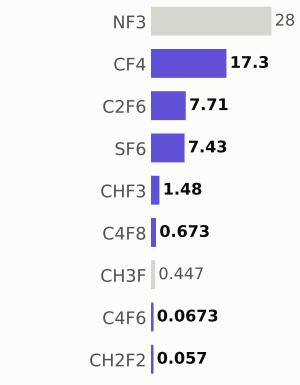

Step #25149.1946: HAR_etch

etch_noop · HAR_etch

1.04	2,787.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

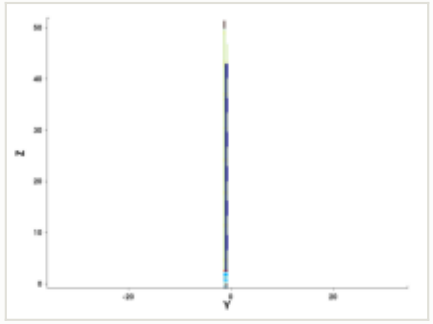

y cut at -1.035 µm

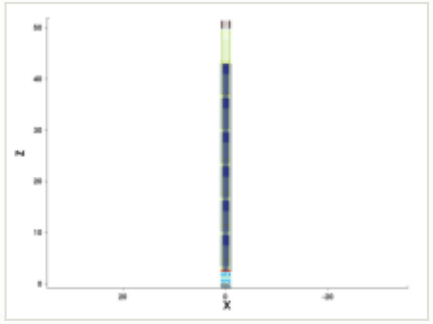

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

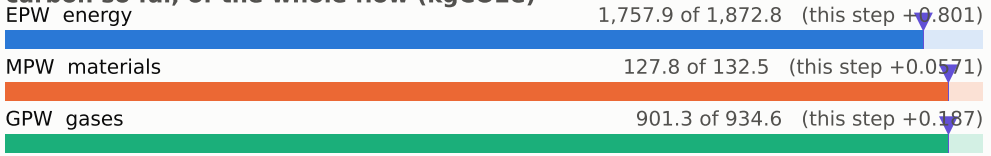

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

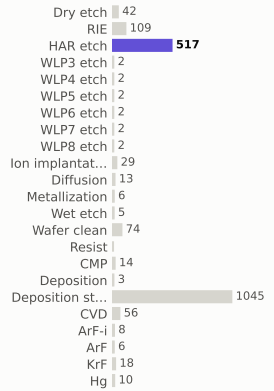

materials deposited (g)

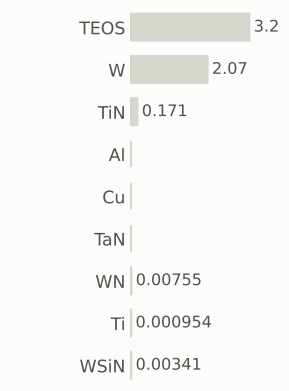

gases emitted (g)

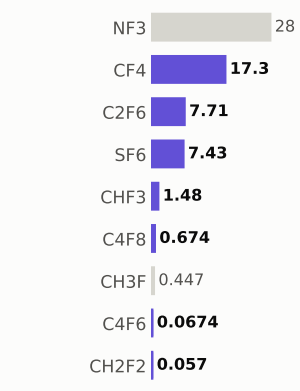

Step #25149.2617: HAR_etch

etch_noop · HAR_etch

1.04	2,788.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

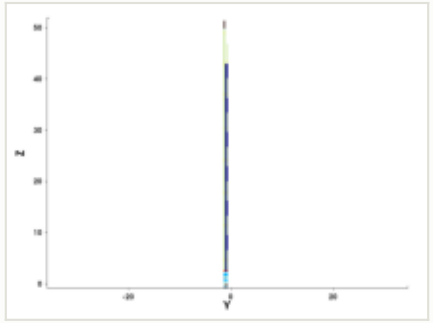

y cut at -1.035 µm

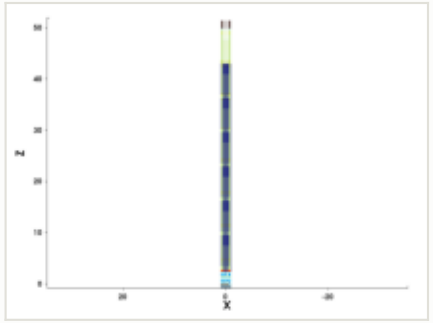

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

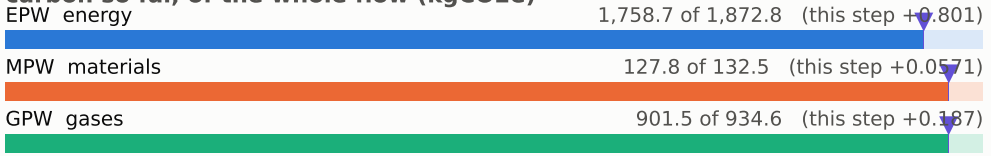

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

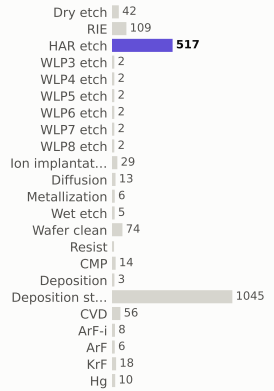

materials deposited (g)

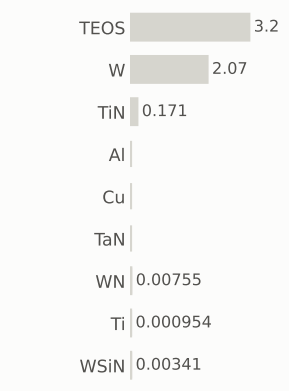

gases emitted (g)

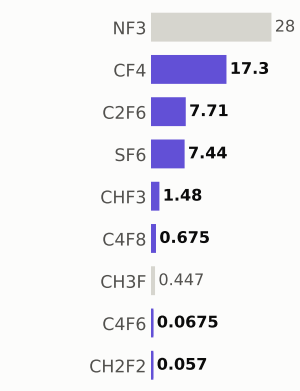

Step #25149.3289: HAR_etch

etch_noop · HAR_etch

1.04	2,789.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

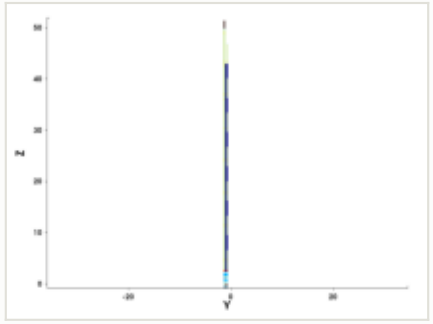

y cut at -1.035 µm

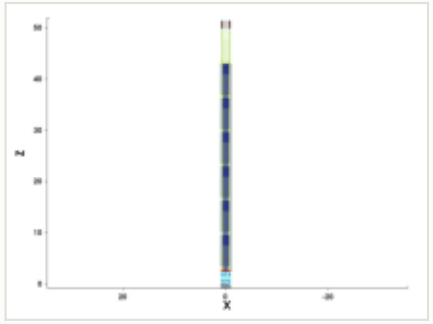

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

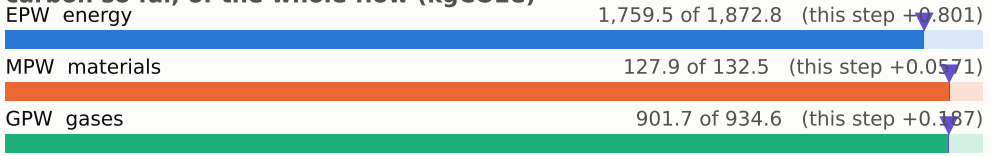

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

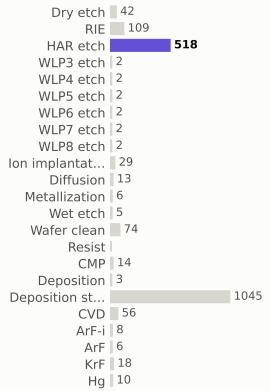

materials deposited (g)

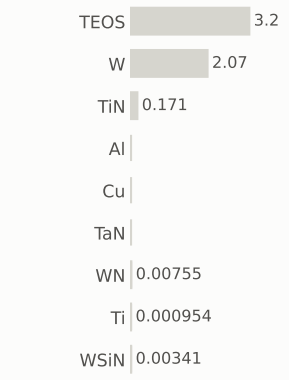

gases emitted (g)



Step #25149.396: HAR_etch

etch_noop · HAR_etch

1.04	2,790.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

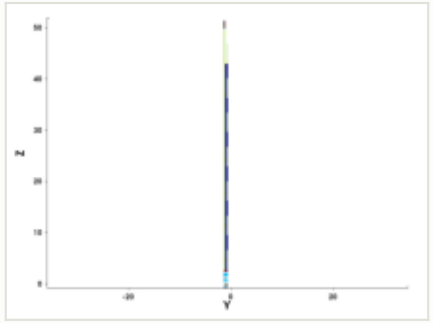

y cut at -1.035 µm

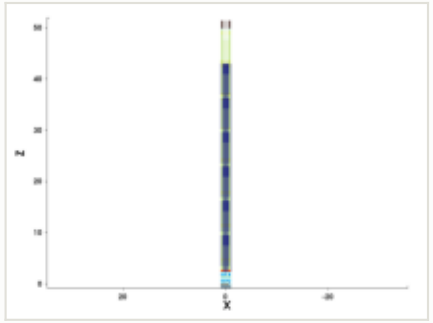

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

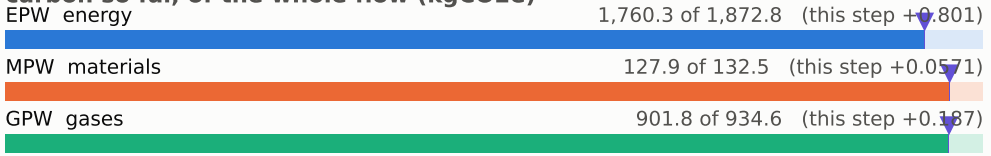

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

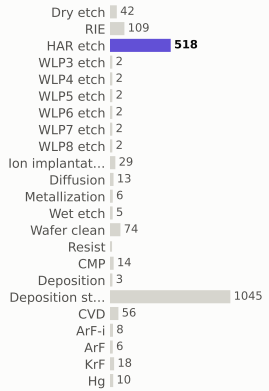

materials deposited (g)

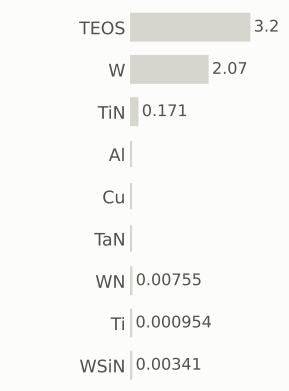

gases emitted (g)

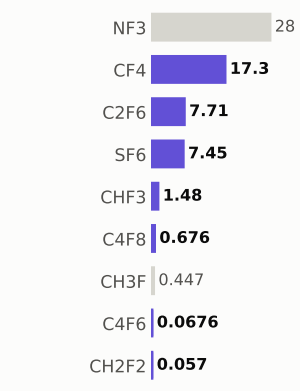

Step #25149.4631: HAR_etch

etch_noop · HAR_etch

1.04	2,791.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

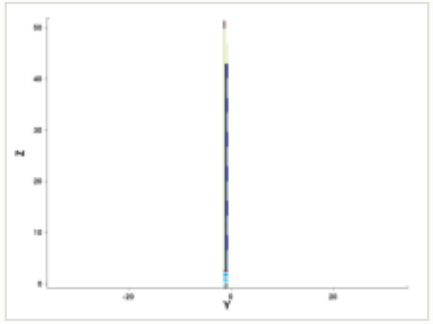

y cut at -1.035 µm

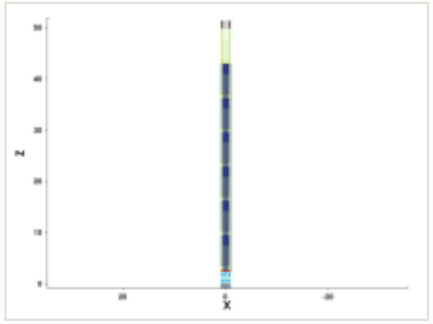

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

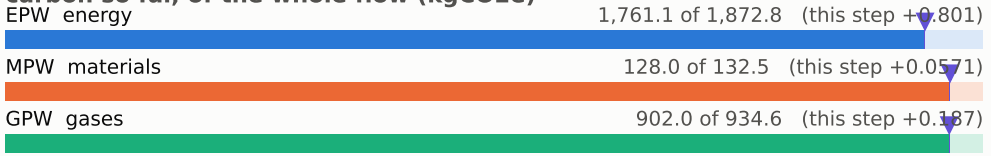

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

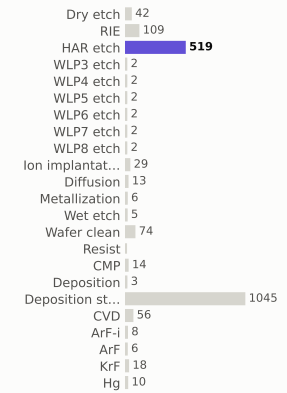

materials deposited (g)

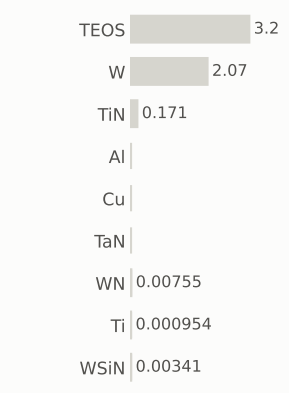

gases emitted (g)

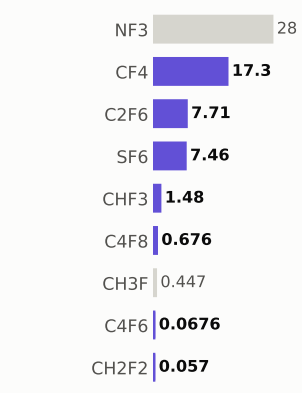

Step #25149.5302: HAR_etch

etch_noop · HAR_etch

1.04	2,792.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

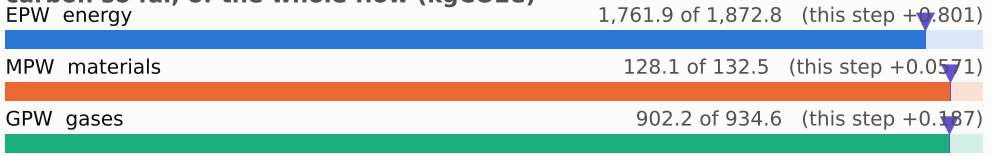

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

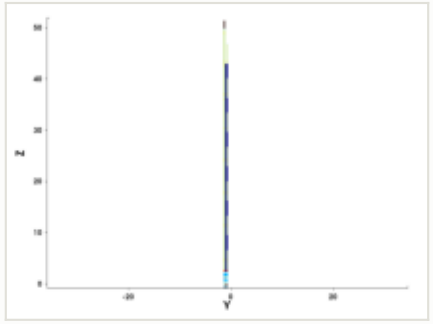

y cut at -1.035 µm

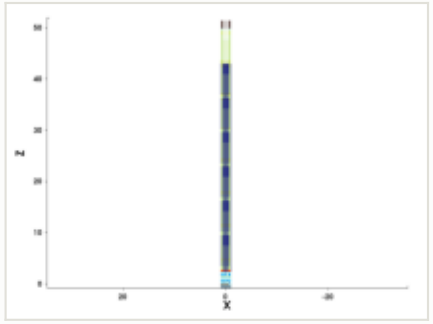

mask for this step

no mask for this step

steps by process area

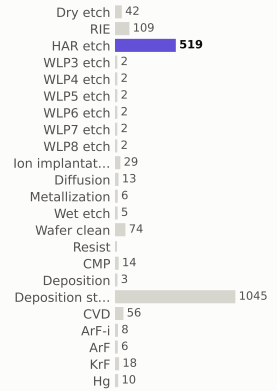

materials deposited (g)

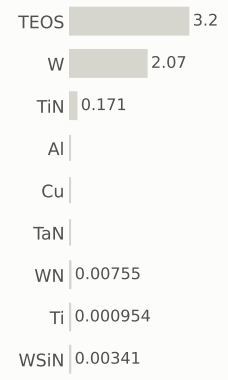

gases emitted (g)



Step #25149.5973: HAR_etch

etch_noop · HAR_etch

1.04	2,793.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

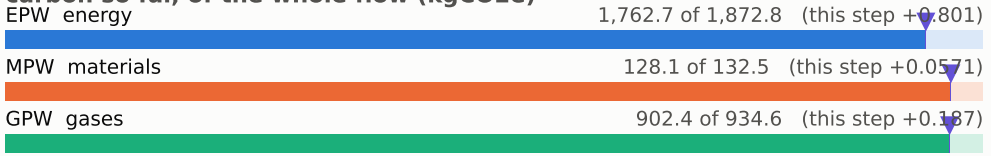

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

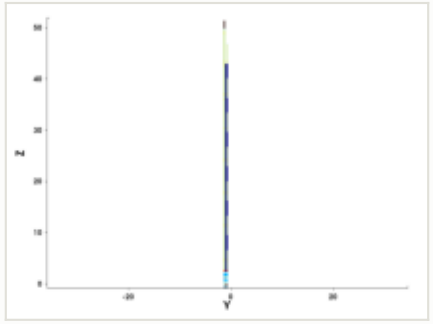

y cut at -1.035 µm

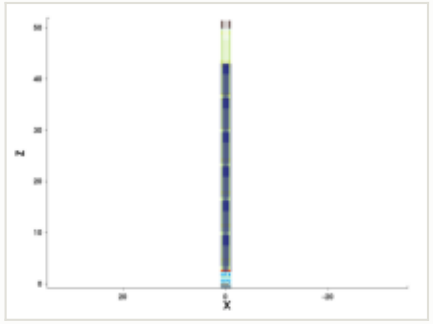

mask for this step

no mask for this step

steps by process area

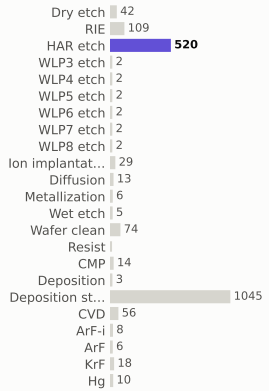

materials deposited (g)

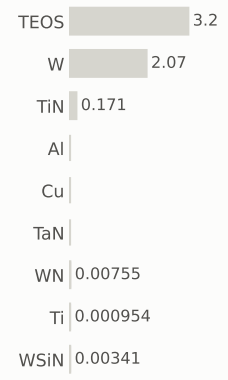

gases emitted (g)



Step #25149.6644: HAR_etch

etch_noop · HAR_etch

1.04	2,794.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

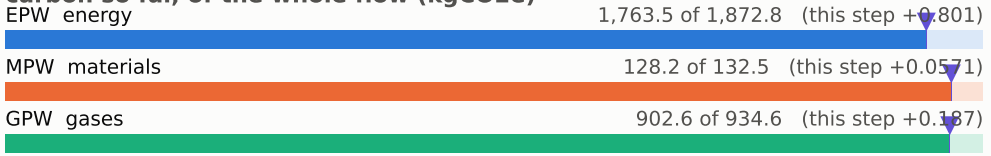

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

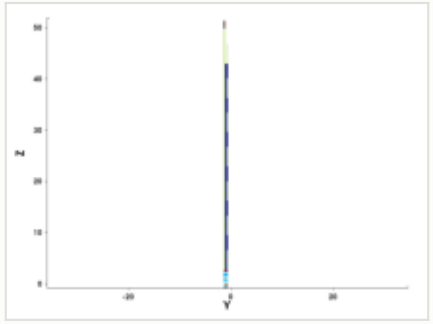

y cut at -1.035 µm

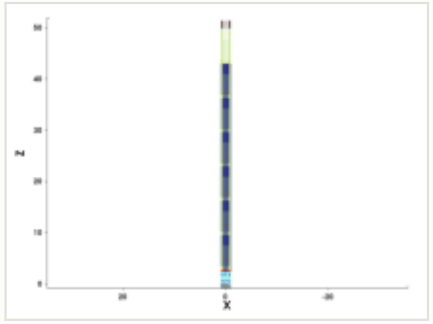

mask for this step

no mask for this step

steps by process area

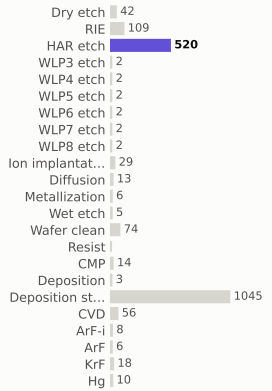

materials deposited (g)

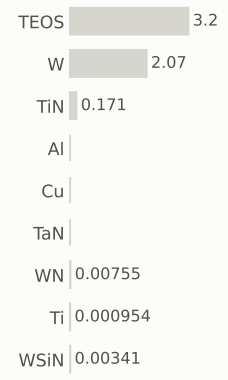

gases emitted (g)



Step #25149.7315: HAR_etch

etch_noop · HAR_etch

1.04	2,795.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

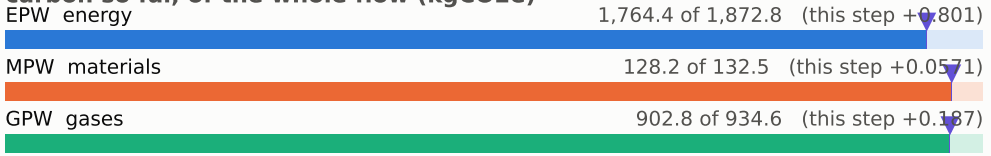

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

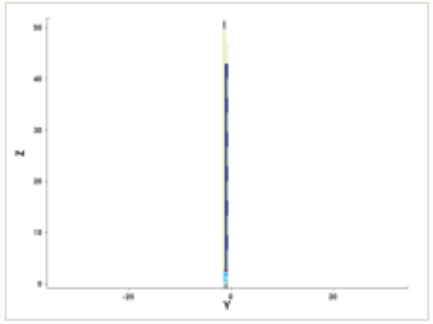

y cut at -1.035 µm

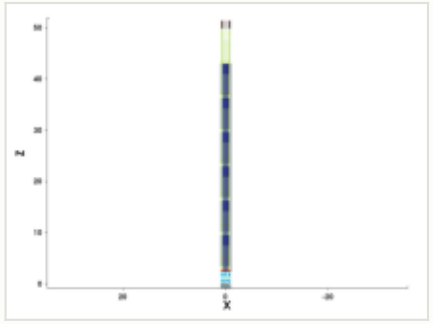

mask for this step

no mask for this step

steps by process area

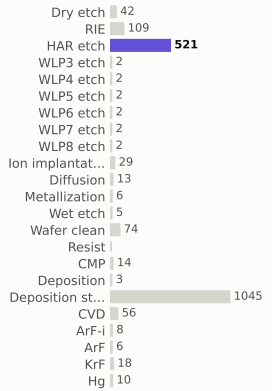

materials deposited (g)

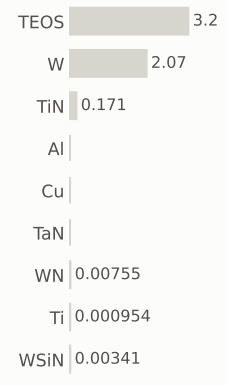

gases emitted (g)



Step #25149.7987: HAR_etch

etch_noop · HAR_etch

1.04	2,796.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

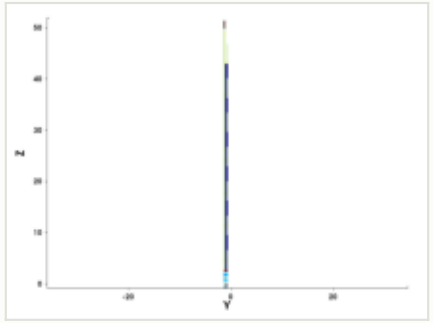

y cut at -1.035 µm

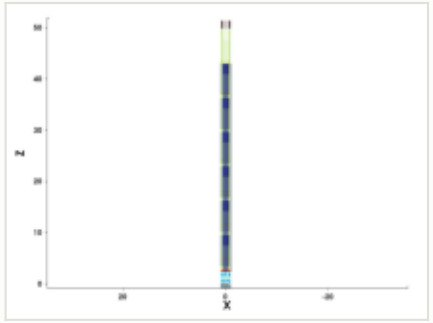

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

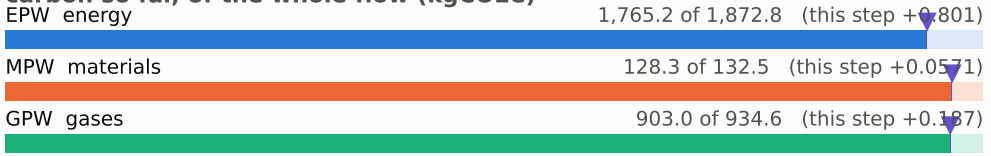

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

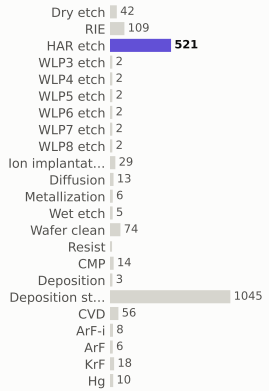

materials deposited (g)

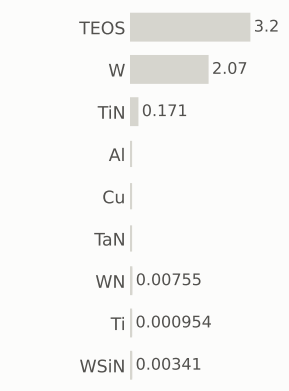

gases emitted (g)

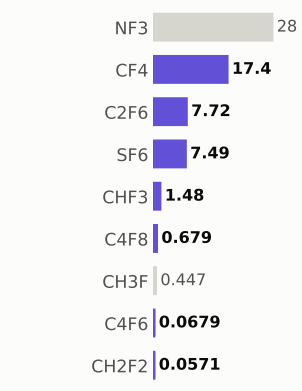

Step #25149.8658: HAR_etch

etch_noop · HAR_etch

1.04	2,797.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

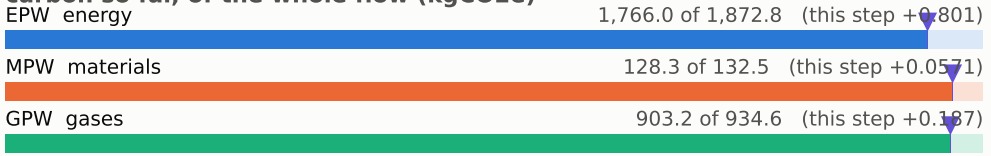

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

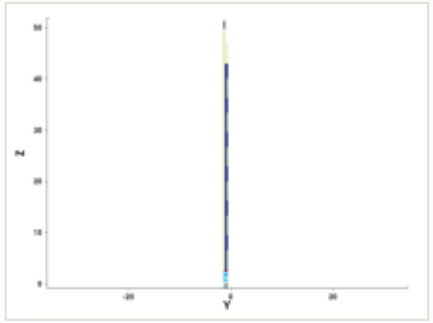

y cut at -1.035 µm

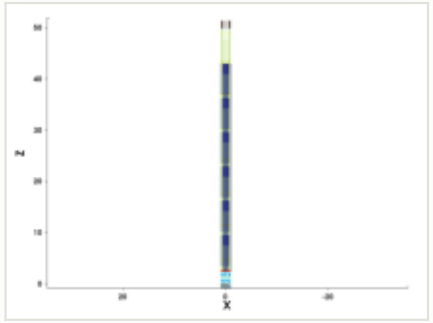

mask for this step

no mask for this step

steps by process area

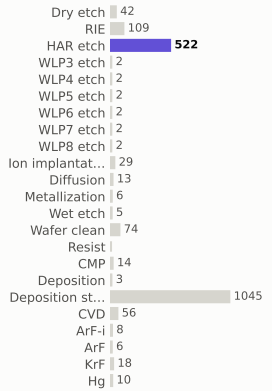

materials deposited (g)

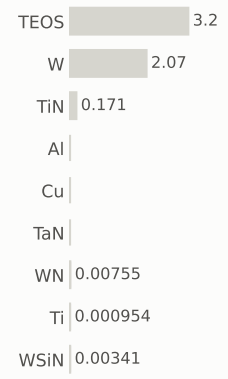

gases emitted (g)



Step #25149.9329: HAR_etch

etch_noop · HAR_etch

1.04	2,798.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

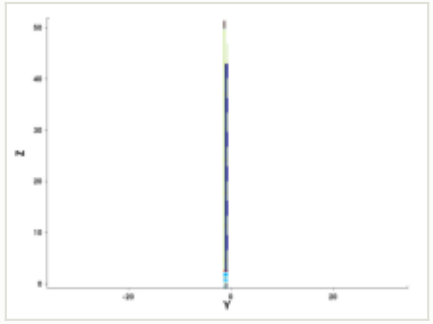

y cut at -1.035 µm

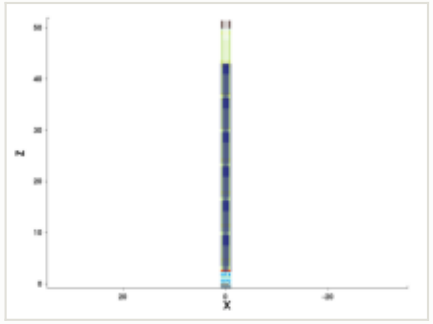

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

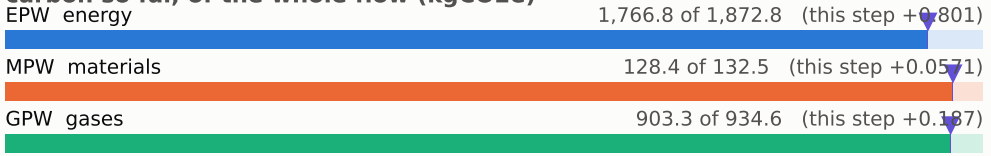

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

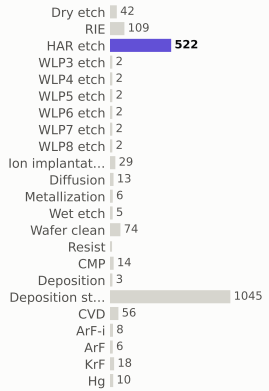

materials deposited (g)

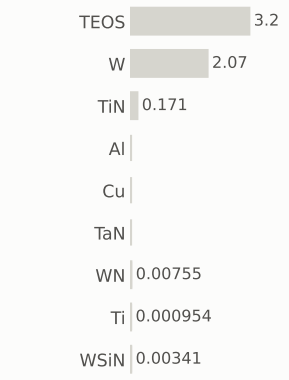

gases emitted (g)



Step #25150: Dry_etch

etch_strip · Dry_etch

0.801	2,799.3	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

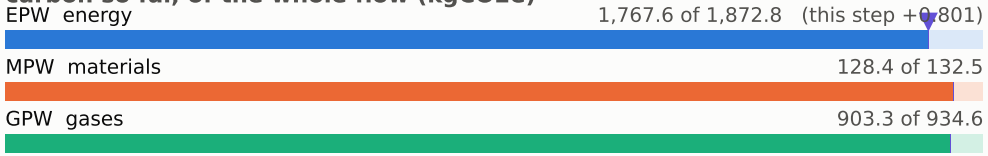

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

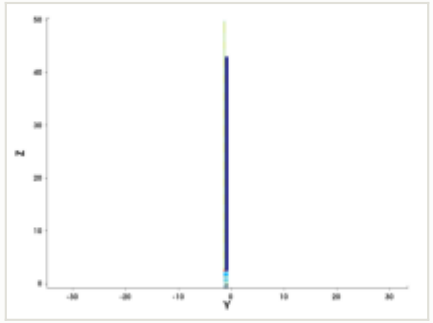

y cut at -1.035 µm

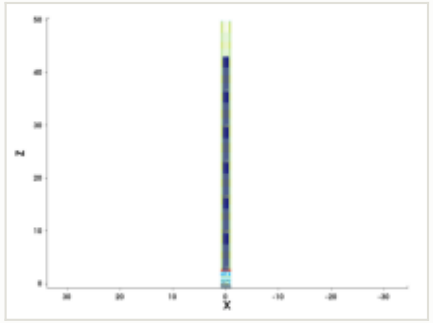

mask for this step

no mask for this step

steps by process area

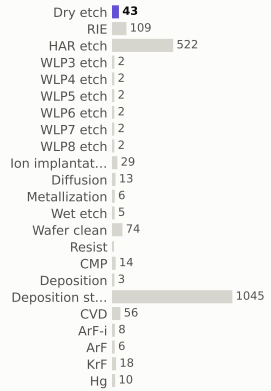

materials deposited (g)

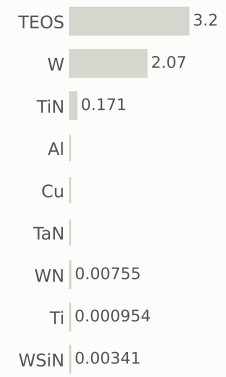

gases emitted (g)

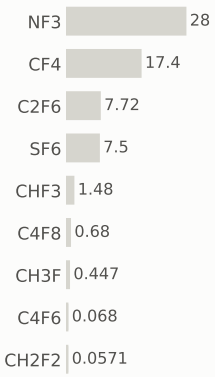

Step #25160: Wafer_clean

clean · Wafer_clean

0.169	2,799.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

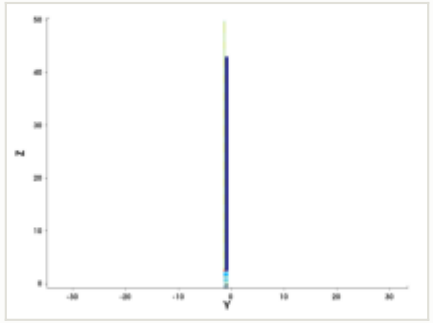

y cut at -1.035 µm

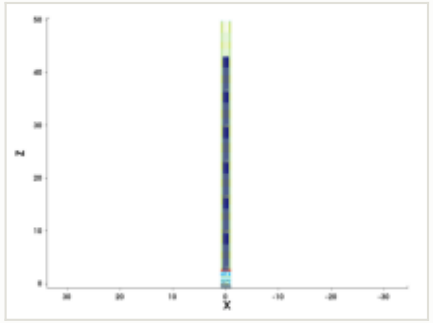

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

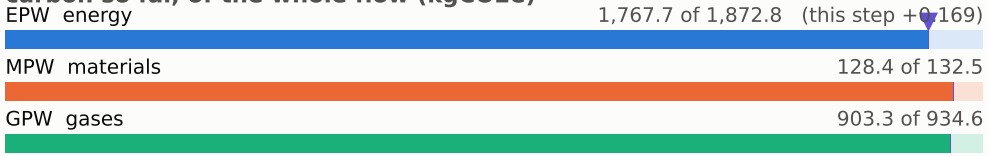

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

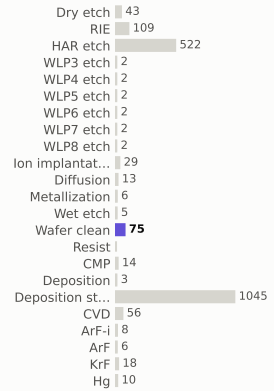

materials deposited (g)

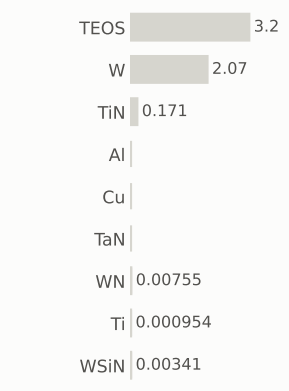

gases emitted (g)

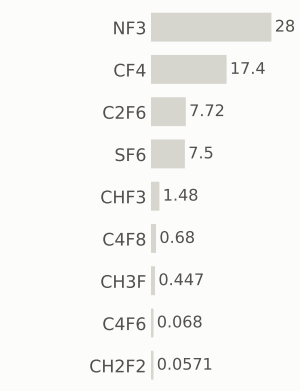

Step #25170: Wet_etch

etch_isotropic · Wet_etch

0.169	2,799.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

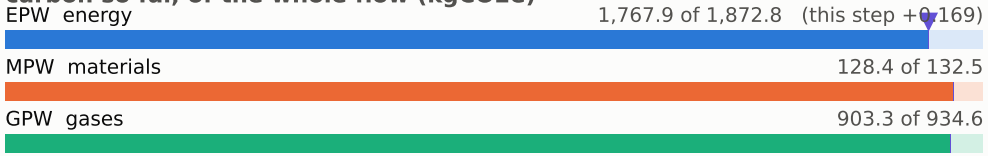

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

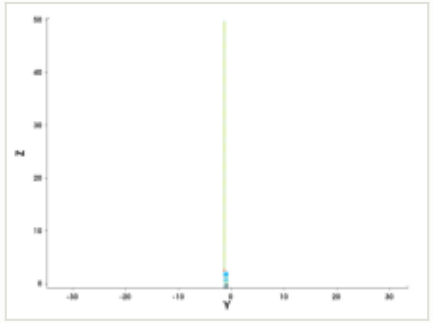

y cut at -1.035 µm

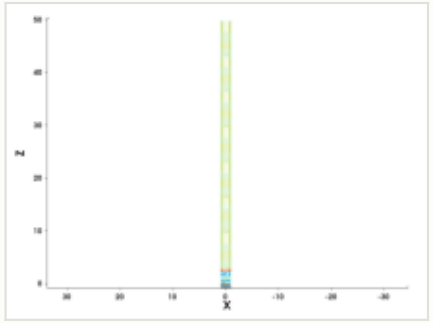

mask for this step

no mask for this step

steps by process area

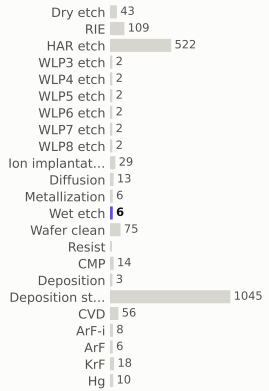

materials deposited (g)

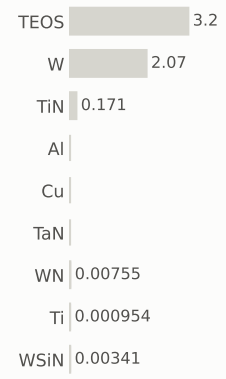

gases emitted (g)

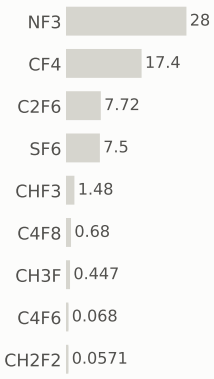

Step #25180: Wafer_clean

clean · Wafer_clean

0.169	2,799.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

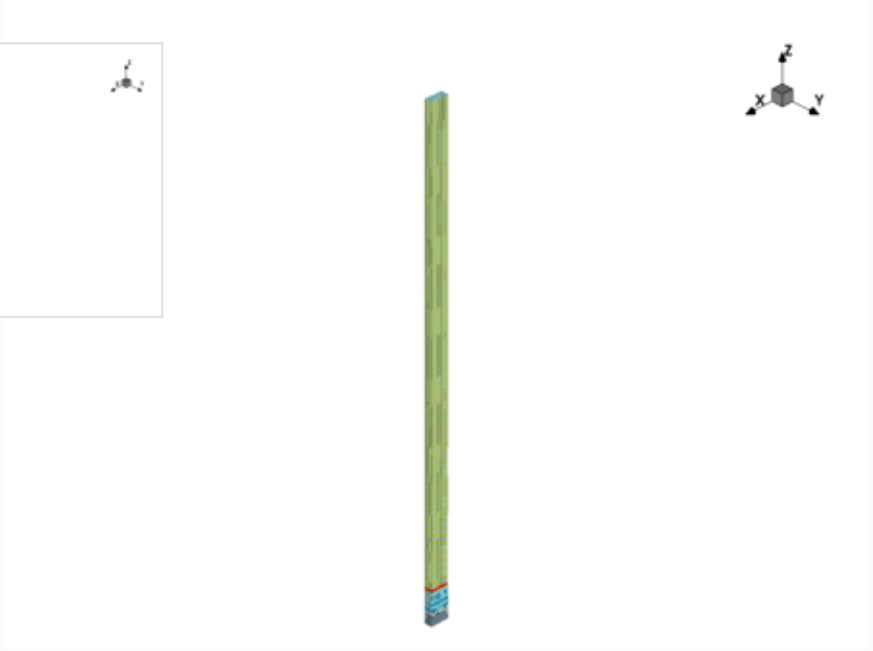

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

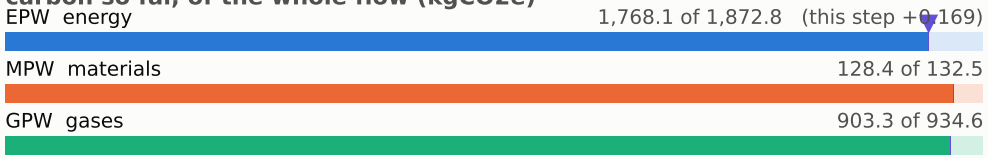

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

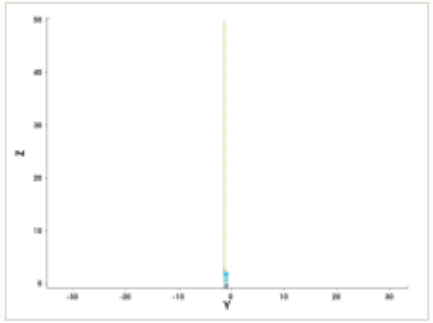

y cut at -1.035 µm

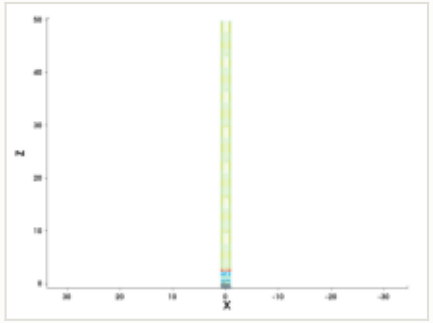

mask for this step

no mask for this step

steps by process area

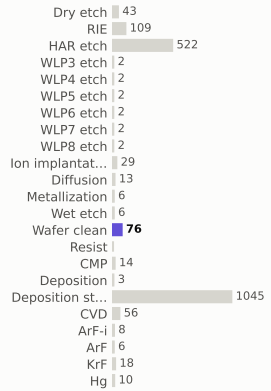

materials deposited (g)

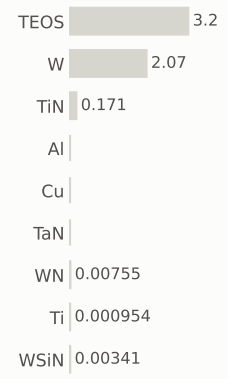

gases emitted (g)



Step #25190: CVD

depo_isotropic · CVD

1.31	2,801.1	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.008 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

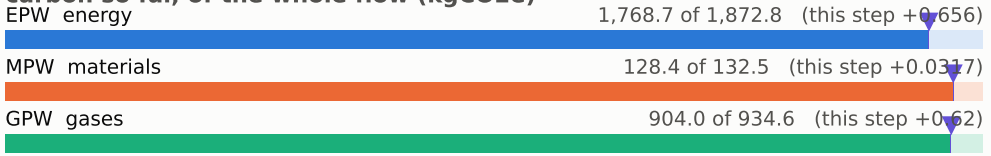

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

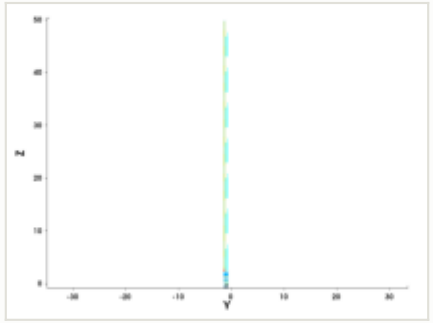

y cut at -1.035 µm

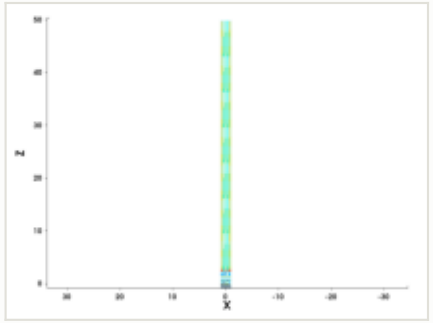

mask for this step

no mask for this step

steps by process area

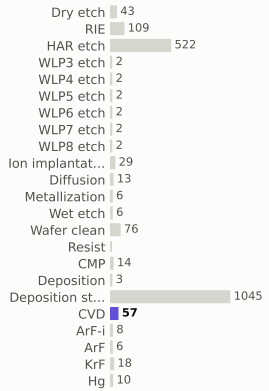

materials deposited (g)

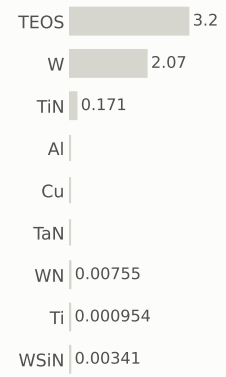

gases emitted (g)

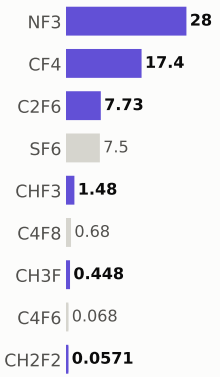

Step #25200: CVD

depo_isotropic · CVD

1.31	2,802.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

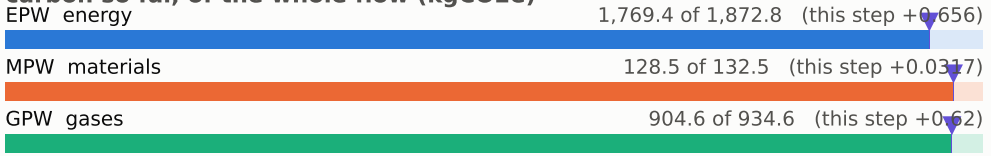

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

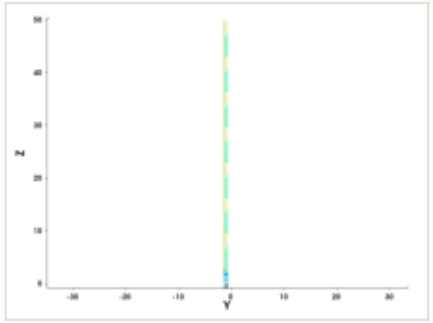

y cut at -1.035 µm

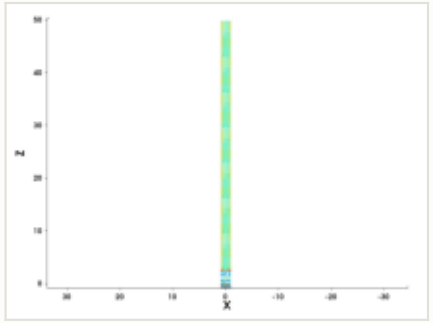

mask for this step

no mask for this step

steps by process area

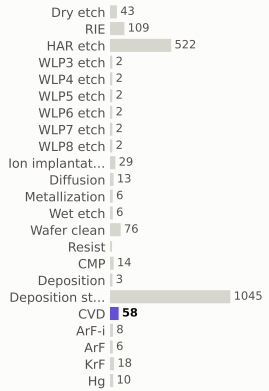

materials deposited (g)

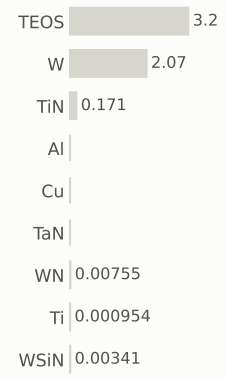

gases emitted (g)



Step #25210: CVD

depo_isotropic · CVD

1.31	2,803.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.004 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

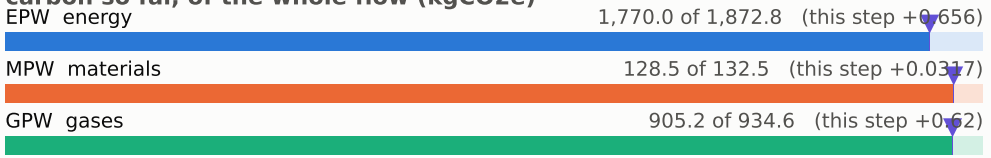

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

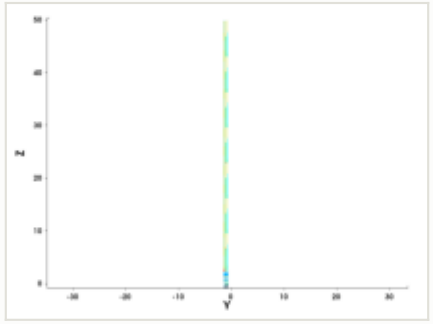

y cut at -1.035 µm

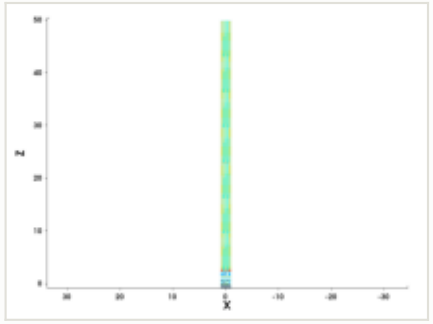

mask for this step

no mask for this step

steps by process area

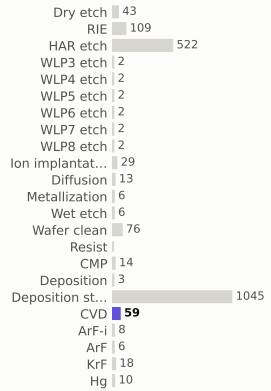

materials deposited (g)



gases emitted (g)

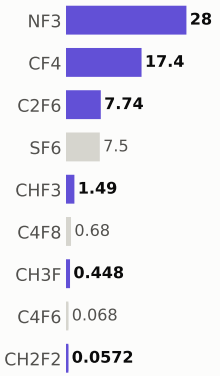

Step #25220: CVD

depo_isotropic · CVD

1.31	2,805.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

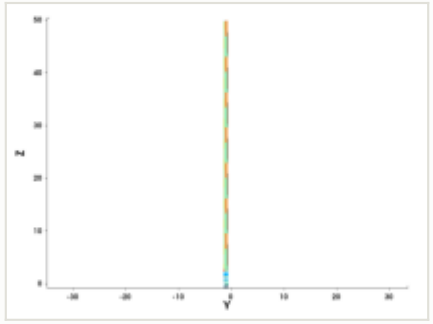

y cut at -1.035 µm

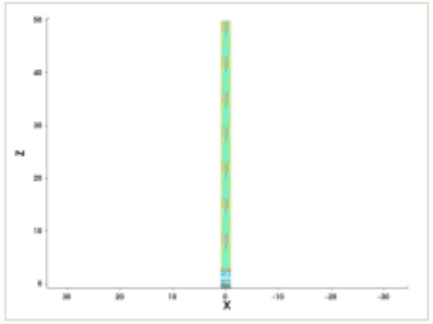

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.008 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

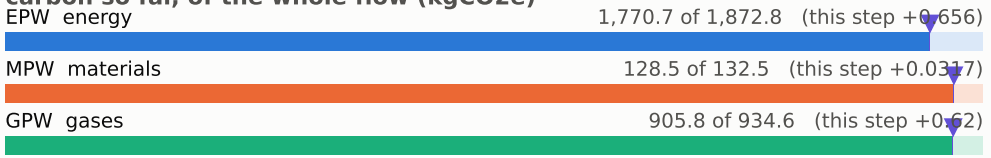

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

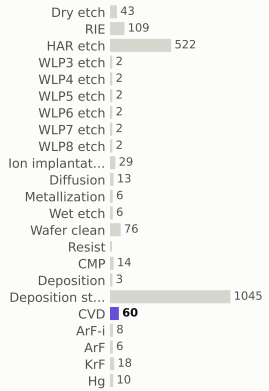

materials deposited (g)

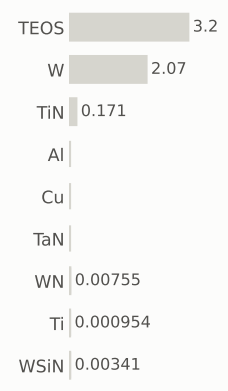

gases emitted (g)

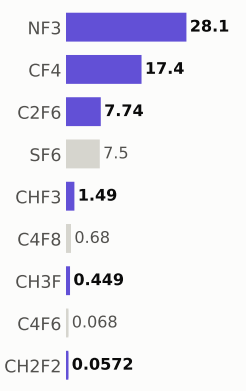

Step #25230: CVD

depo_isotropic · CVD

1.31	2,806.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

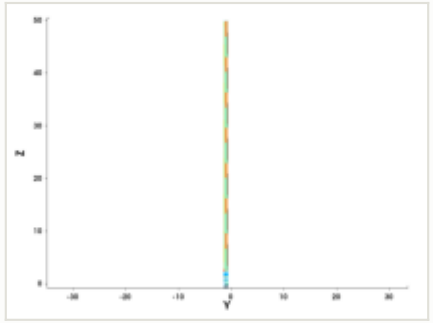

y cut at -1.035 µm

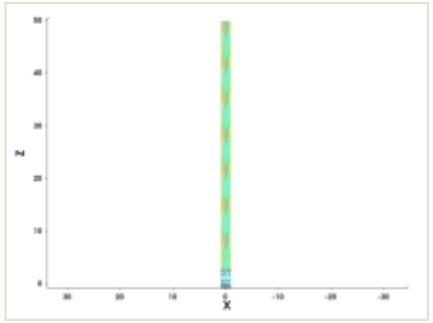

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

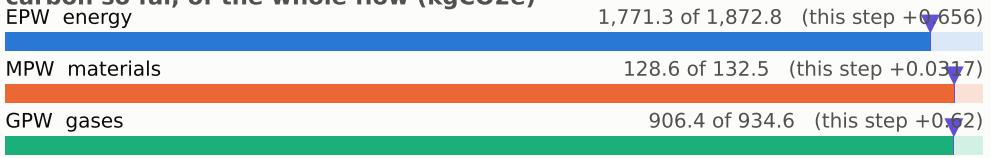

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

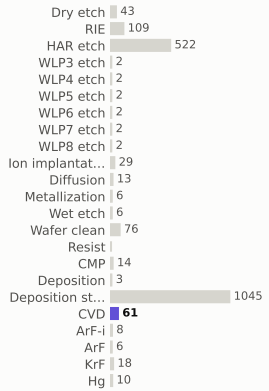

materials deposited (g)

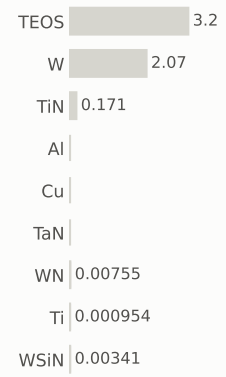

gases emitted (g)

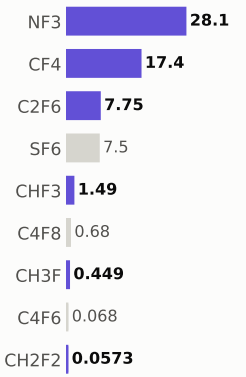

Step #25240: CMP

etch_cmp · CMP

0.169	2,806.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

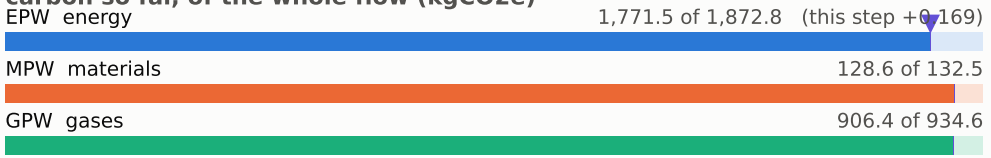

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

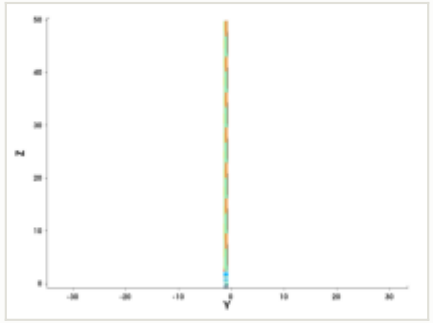

y cut at -1.035 µm

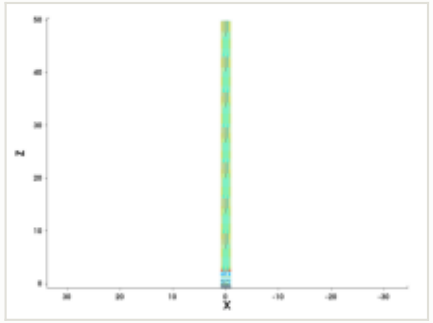

mask for this step

no mask for this step

steps by process area

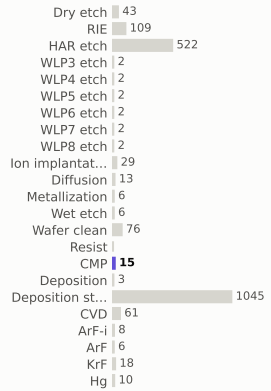

materials deposited (g)

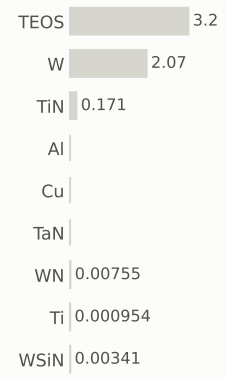

gases emitted (g)

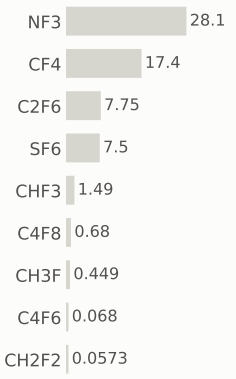

Step #25250: Wafer_clean

clean · Wafer_clean

0.169	2,806.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

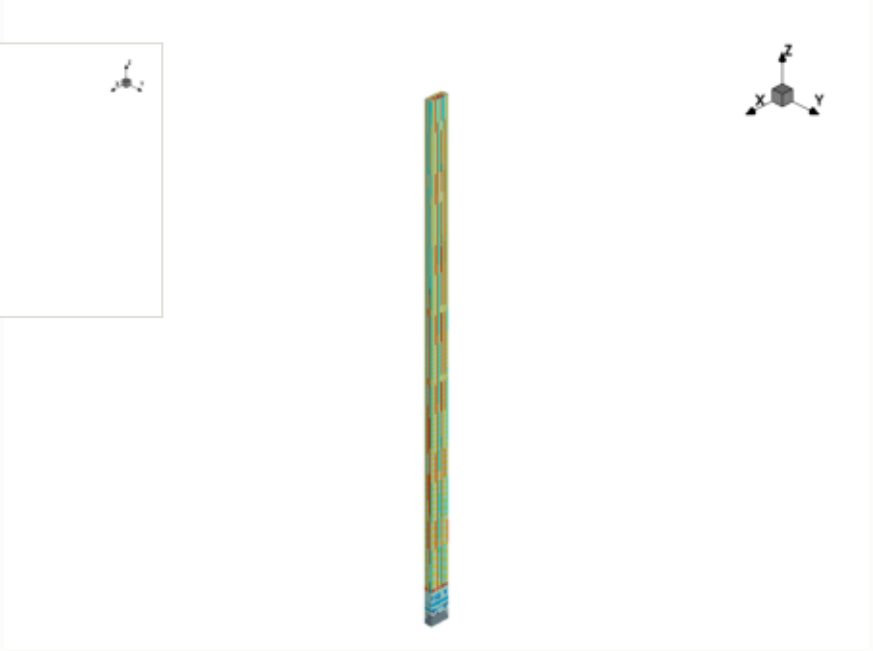

x cut at 0.000 µm

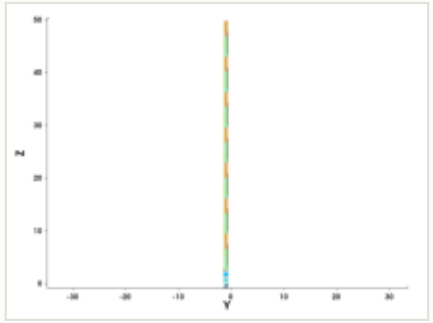

y cut at -1.035 µm

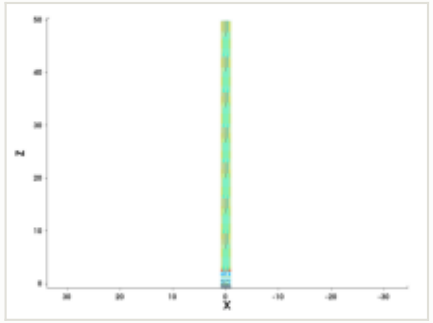

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

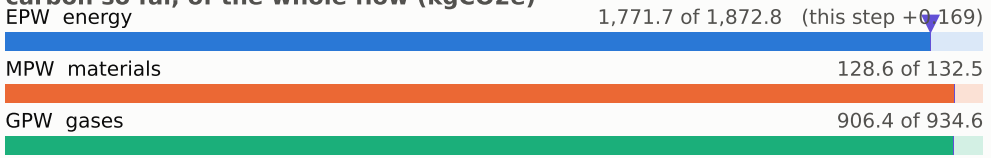

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

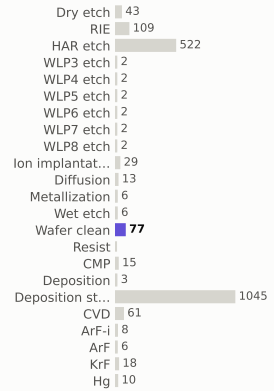

materials deposited (g)



gases emitted (g)

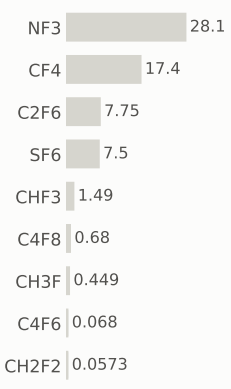

Step #25260: RIE

etch_anisotropic · RIE

1.04	2,807.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

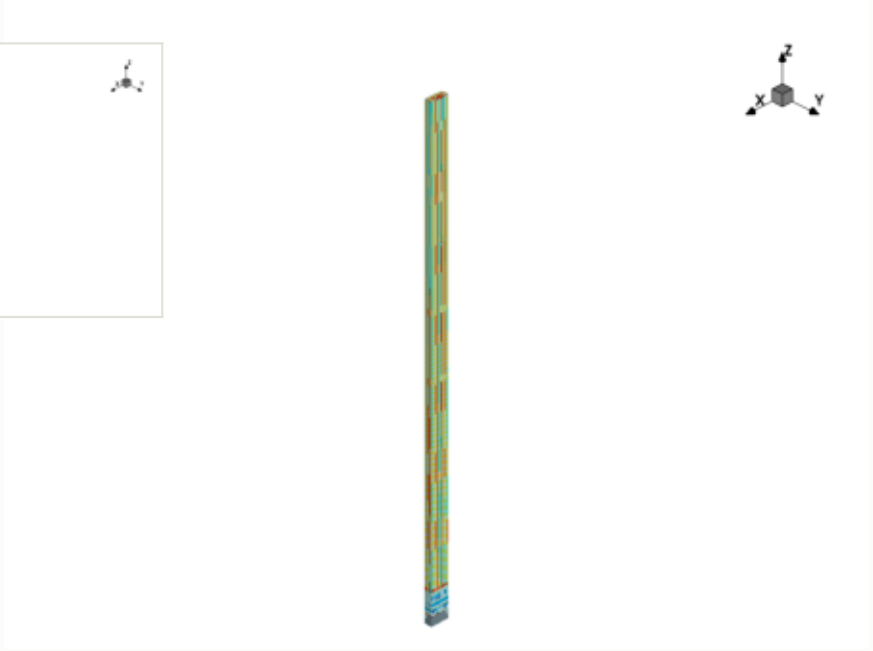

x cut at 0.000 µm

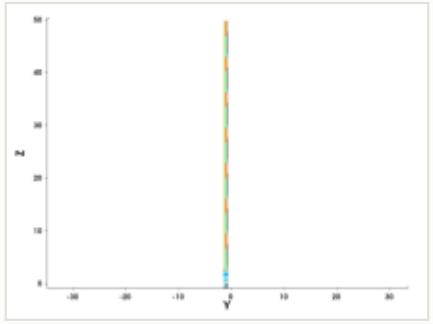

y cut at -1.035 µm

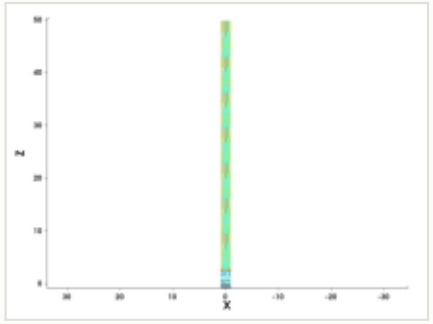

mask for this step

no mask for this step

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

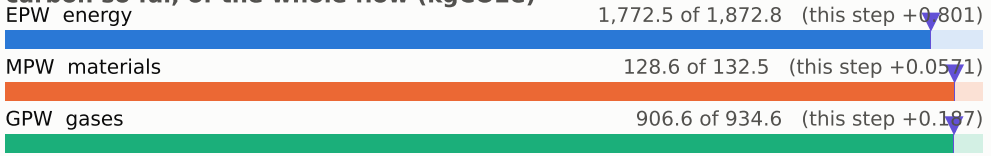

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

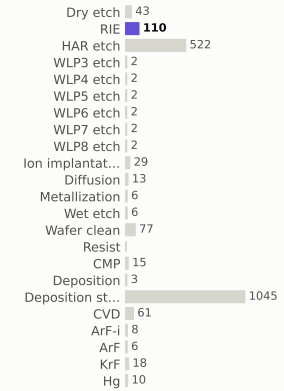

materials deposited (g)

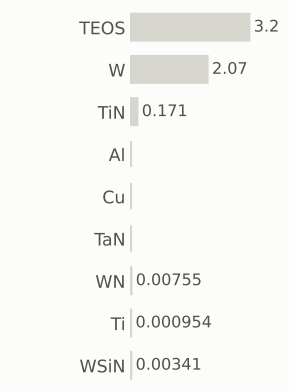

gases emitted (g)

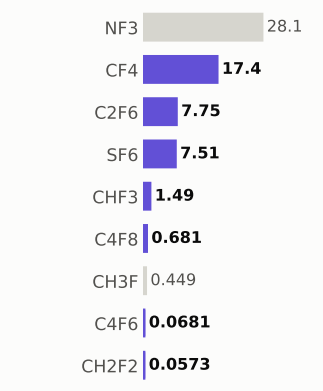

Step #25270: Wafer_clean

clean · Wafer_clean

0.169	2,807.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

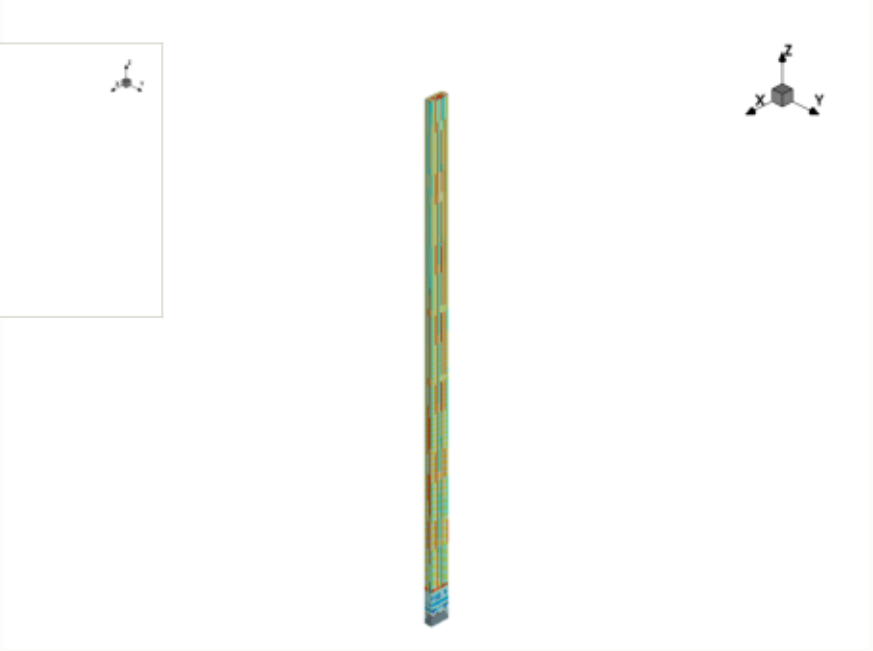

x cut at 0.000 µm

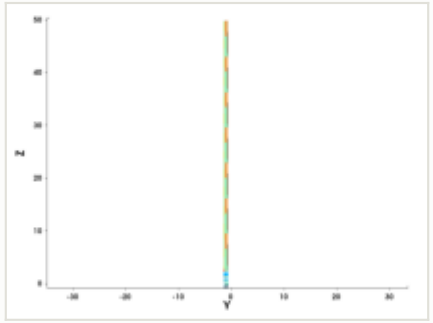

y cut at -1.035 µm

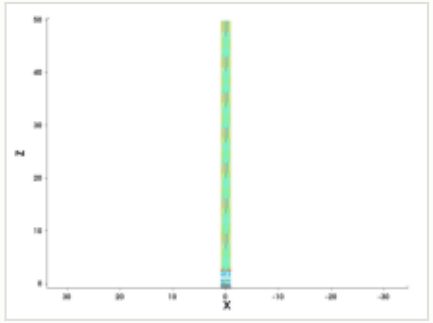

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

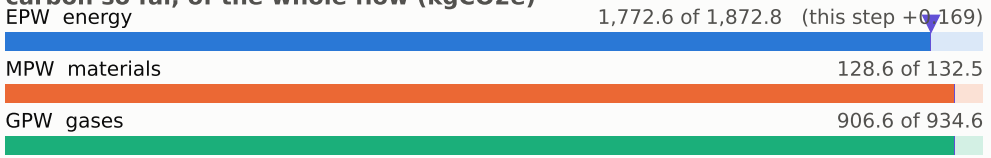

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

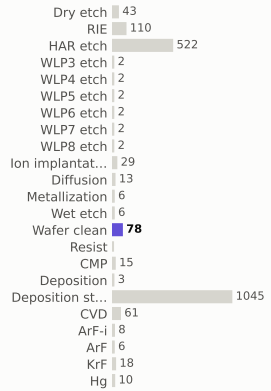

materials deposited (g)

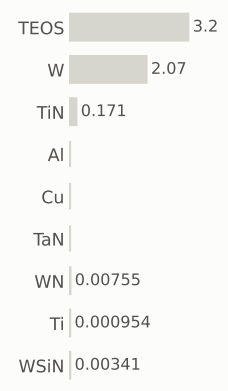

gases emitted (g)

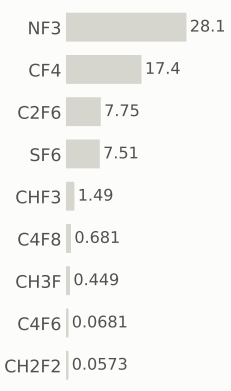

Step #25280: CVD

depo_isotropic · CVD

1.31	2,809.2	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

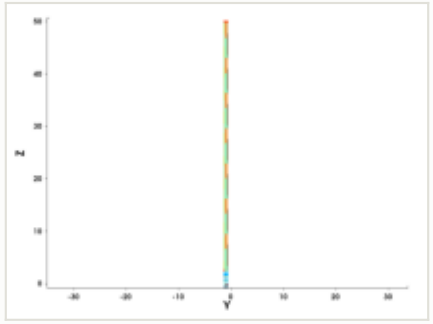

y cut at -1.035 µm

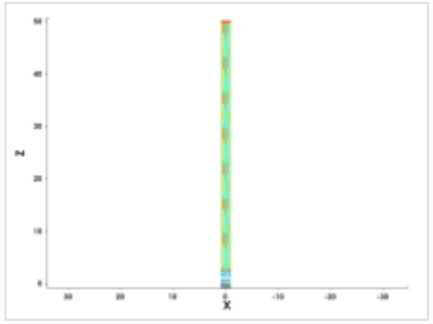

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

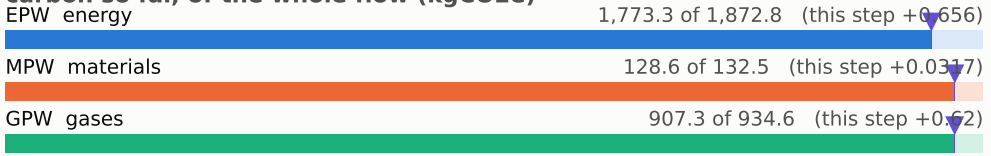

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

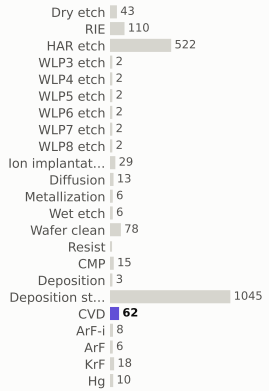

materials deposited (g)

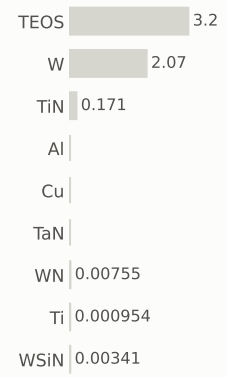

gases emitted (g)

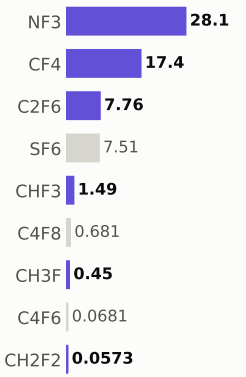

Step #25290: CMP

etch_cmp · CMP

0.169	2,809.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

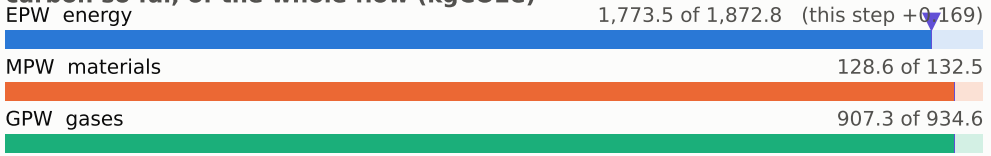

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

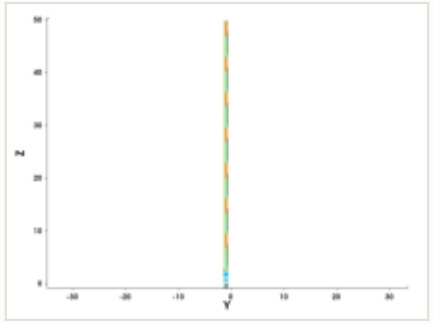

y cut at -1.035 µm

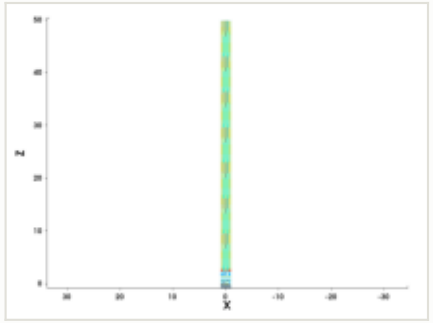

mask for this step

no mask for this step

steps by process area

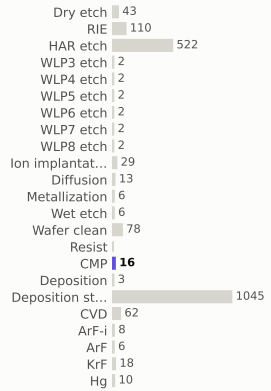

materials deposited (g)

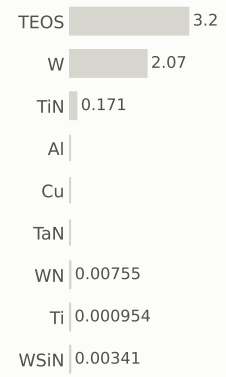

gases emitted (g)

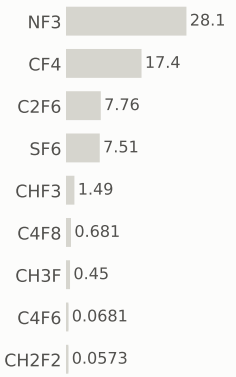

Step #25300: Wafer_clean

clean · Wafer_clean

0.169	2,809.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

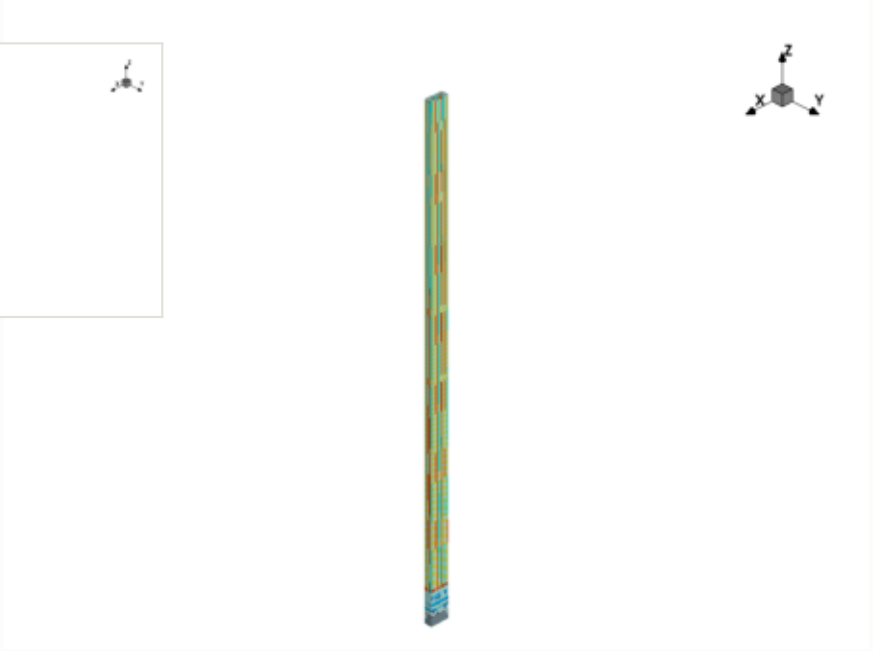

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

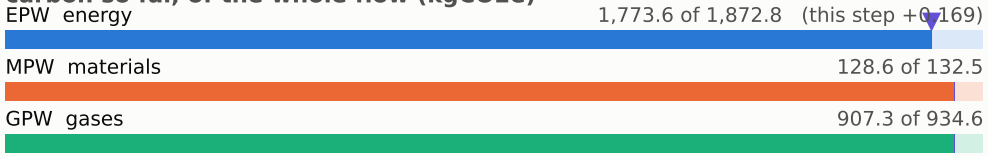

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

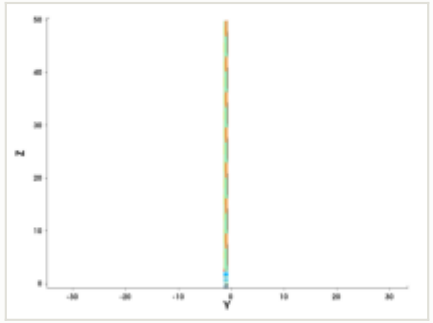

y cut at -1.035 µm

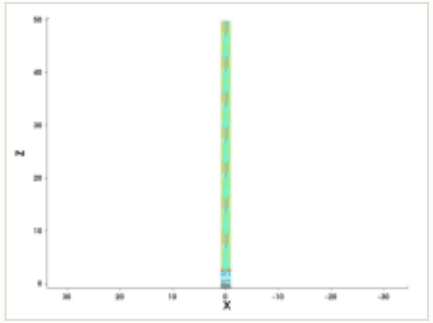

mask for this step

no mask for this step

steps by process area

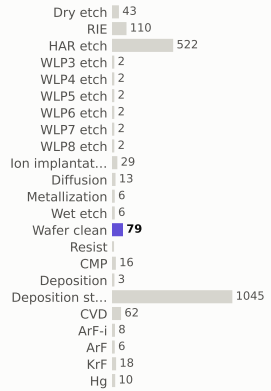

materials deposited (g)

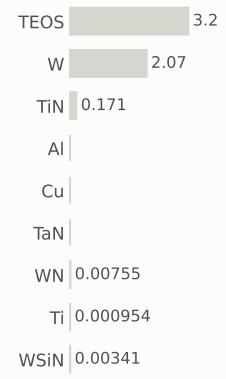

gases emitted (g)

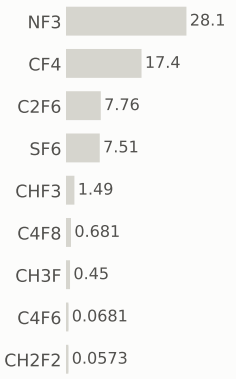

Step #25310: RIE

etch_isotropic · RIE

1.04	2,810.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

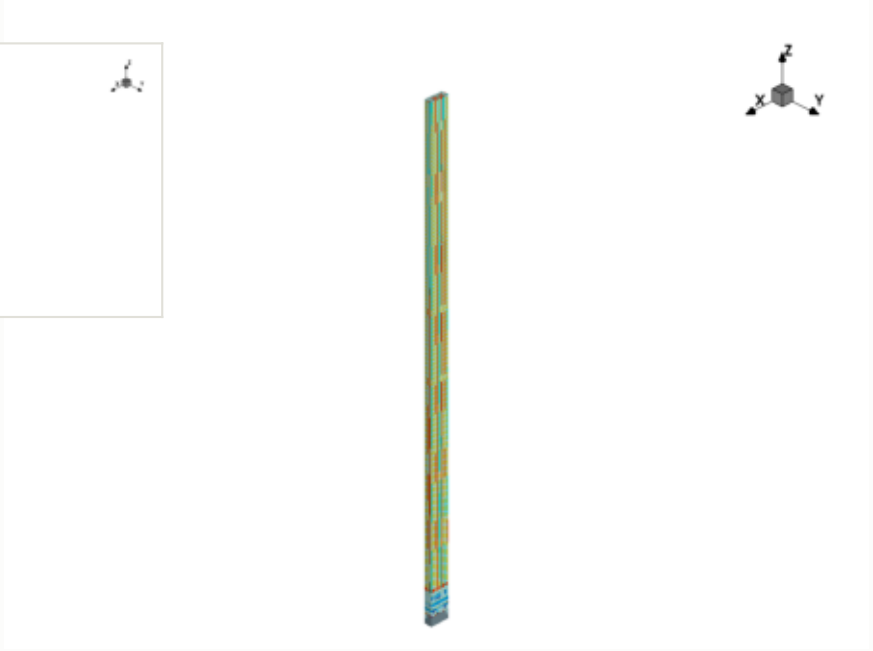

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

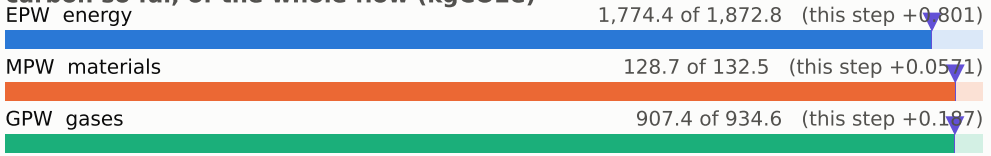

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

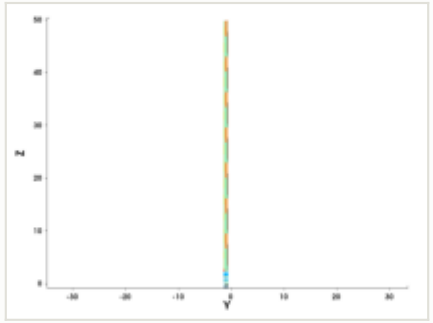

y cut at -1.035 µm

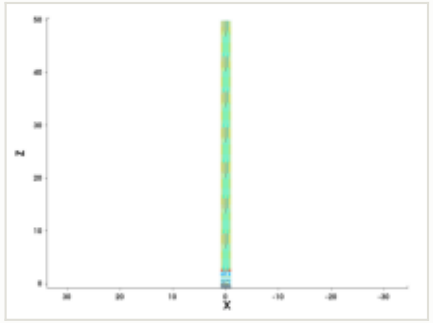

mask for this step

no mask for this step

steps by process area

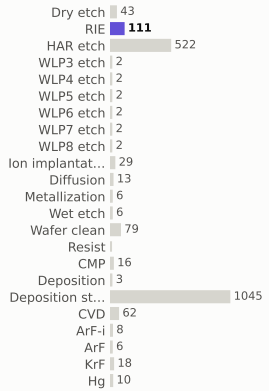

materials deposited (g)

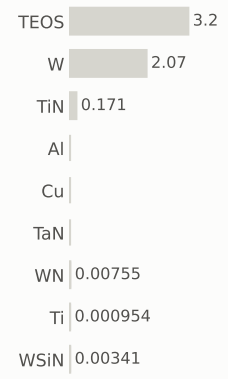

gases emitted (g)

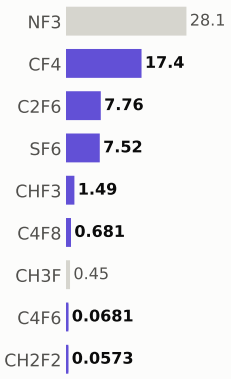

Step #25320: CVD

depo_isotropic · CVD

1.31	2,811.9	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

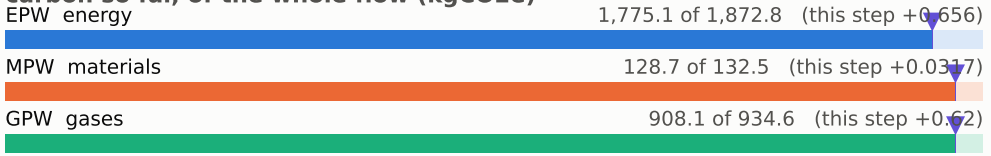

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

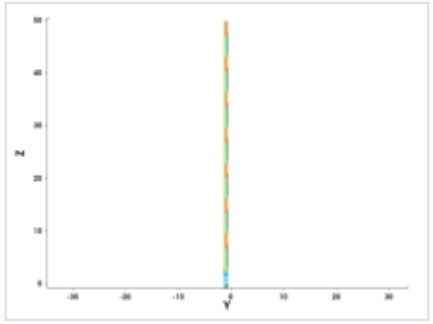

y cut at -1.035 µm

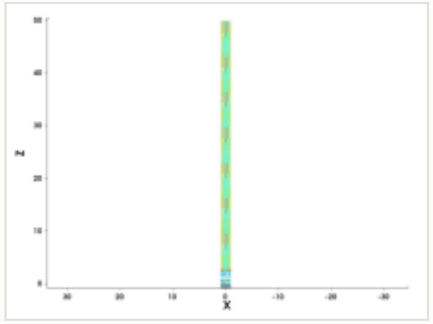

mask for this step

no mask for this step

steps by process area

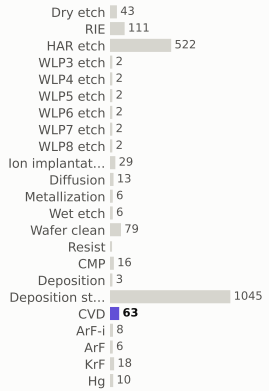

materials deposited (g)



gases emitted (g)

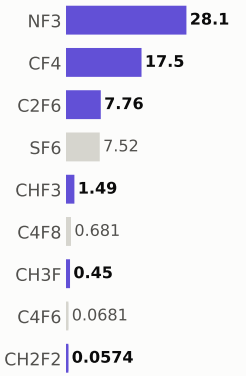

Step #25330: CMP

etch_cmp · CMP

0.169	2,812.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

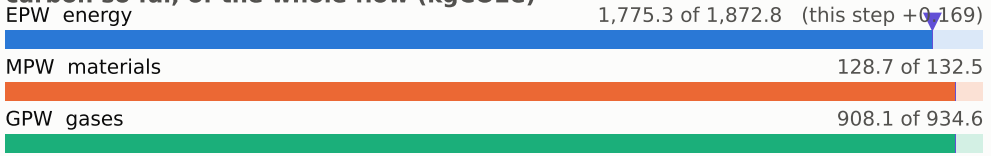

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

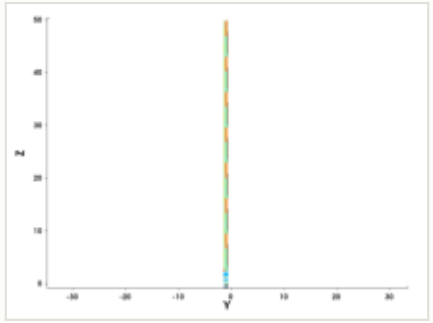

y cut at -1.035 µm

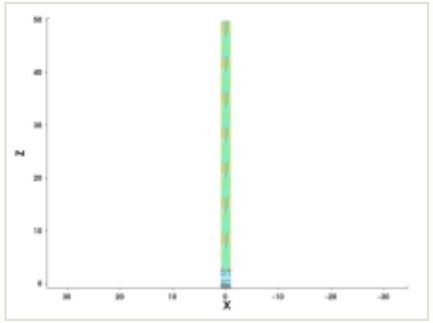

mask for this step

no mask for this step

steps by process area

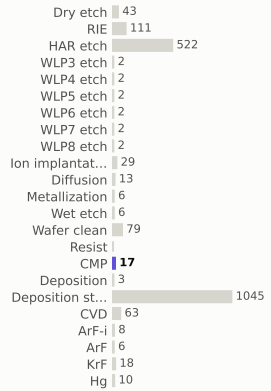

materials deposited (g)

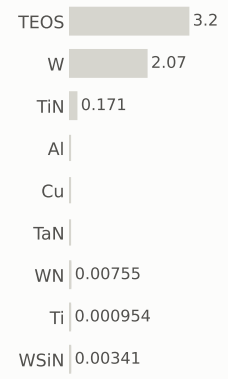

gases emitted (g)

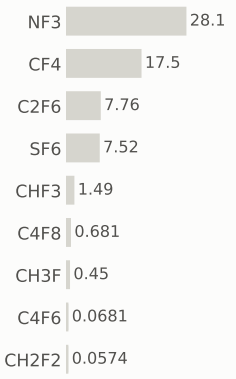

Step #25340: Wafer_clean

clean · Wafer_clean

0.169	2,812.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

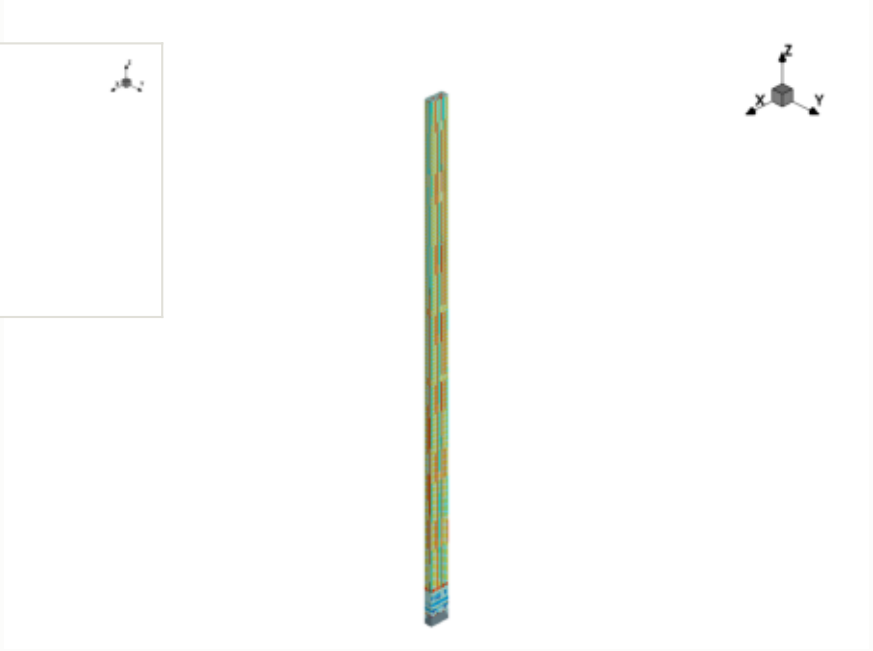

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

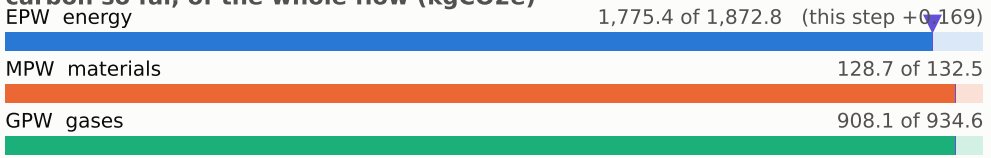

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

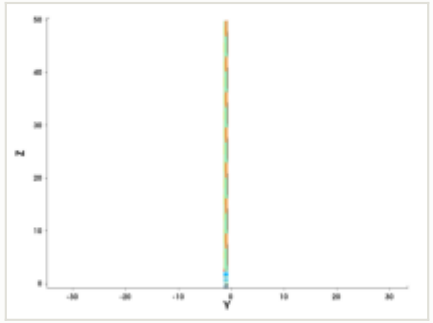

y cut at -1.035 µm

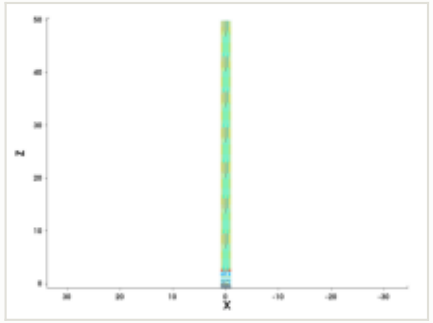

mask for this step

no mask for this step

steps by process area

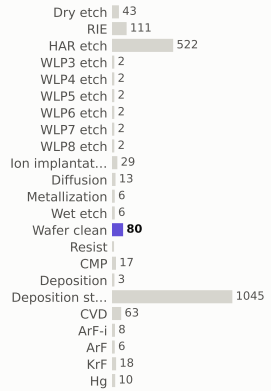

materials deposited (g)

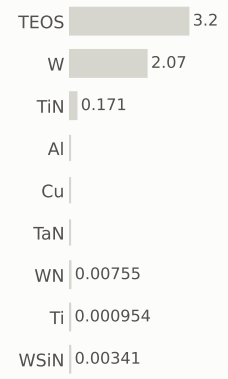

gases emitted (g)

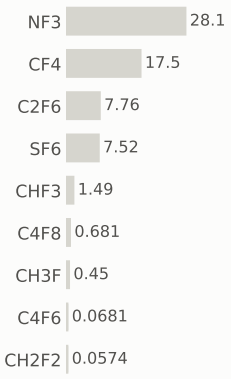

Step #25360: CVD

depo_isotropic · CVD

1.31	2,813.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.003 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

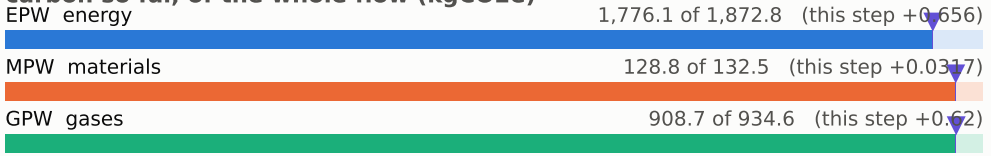

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

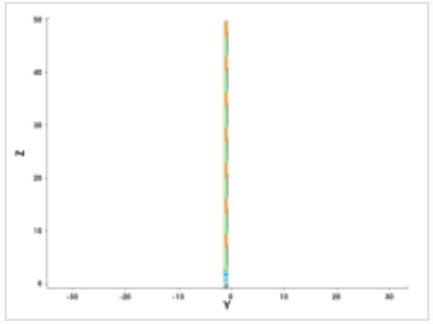

y cut at -1.035 µm

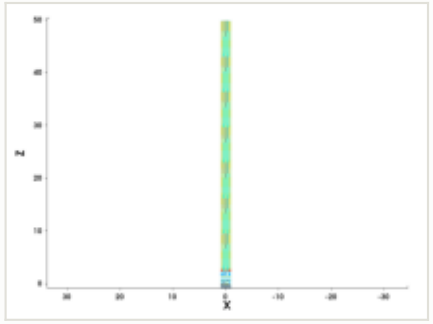

mask for this step

no mask for this step

steps by process area

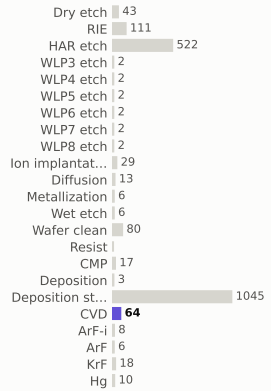

materials deposited (g)

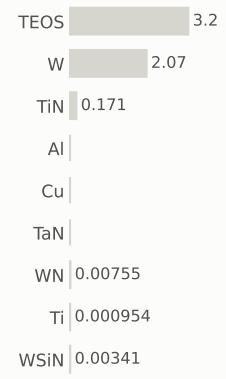

gases emitted (g)

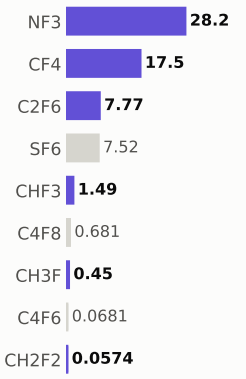

Step #25370: ArF

litho_patterning · ArF

0.199	2,813.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

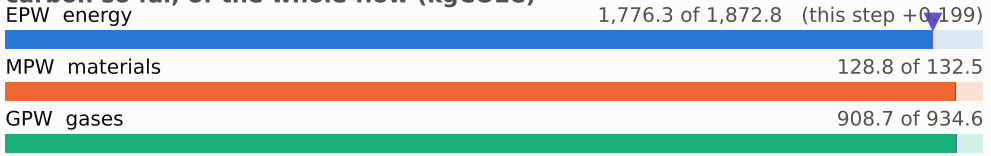

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

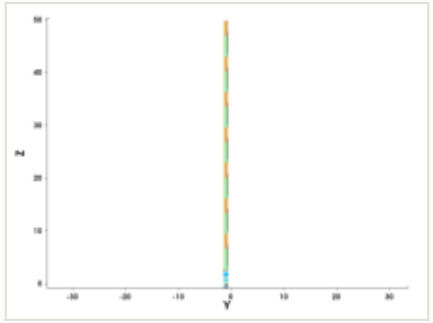

y cut at -1.035 µm

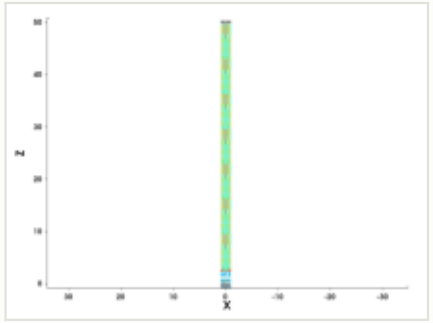

mask: layer 36:0 (OASIS)



steps by process area

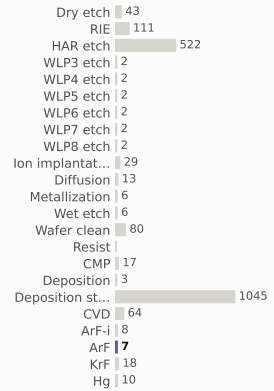

materials deposited (g)

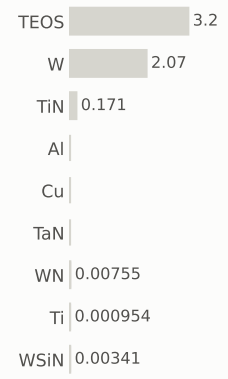

gases emitted (g)

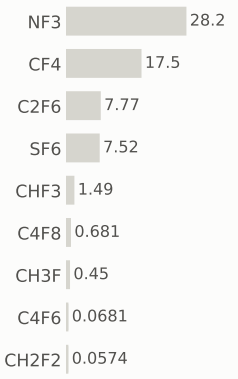

Step #25380: RIE

etch_anisotropic · RIE

1.04	2,814.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

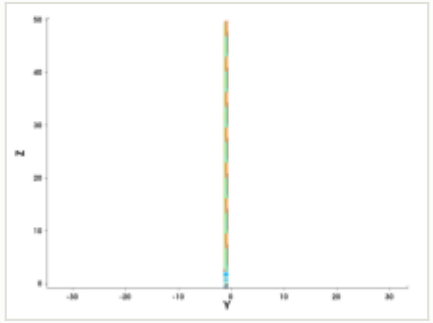

y cut at -1.035 µm

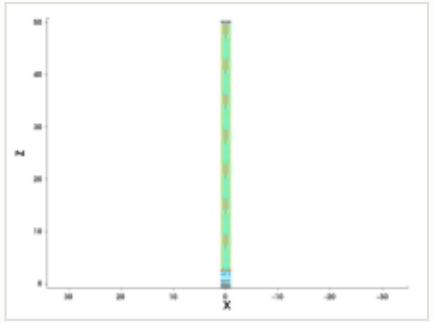

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

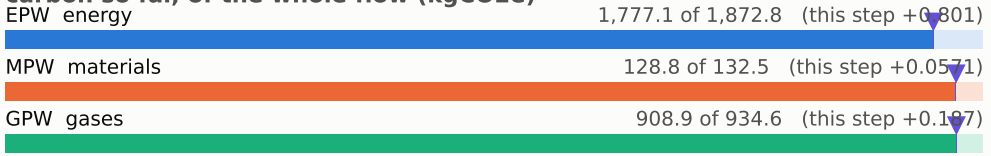

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

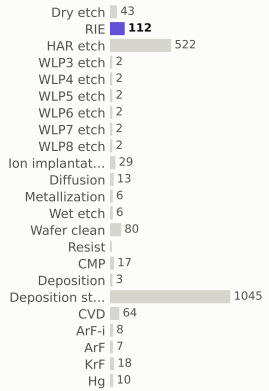

materials deposited (g)

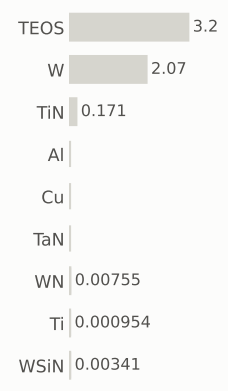

gases emitted (g)

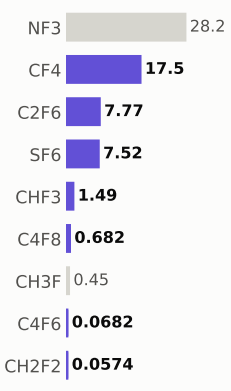

Step #25390: RIE

etch_anisotropic · RIE

1.04	2,815.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

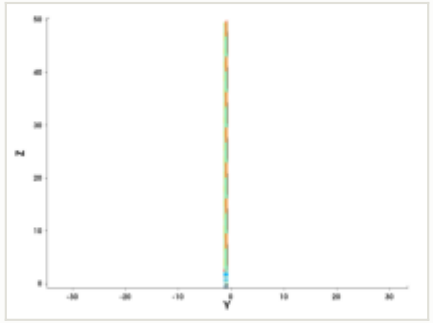

y cut at -1.035 µm

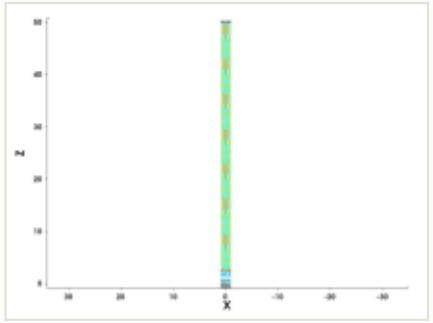

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

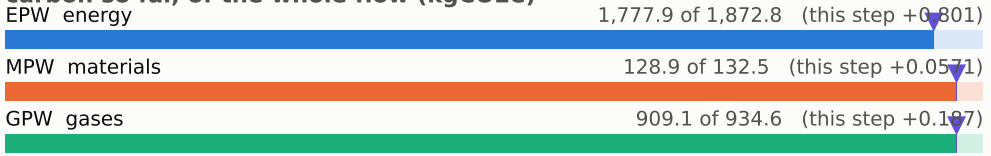

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

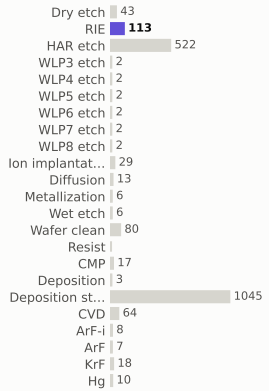

materials deposited (g)

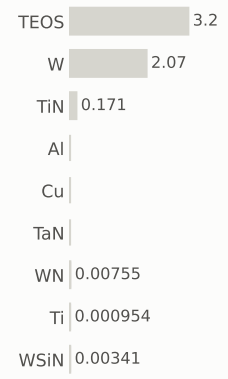

gases emitted (g)

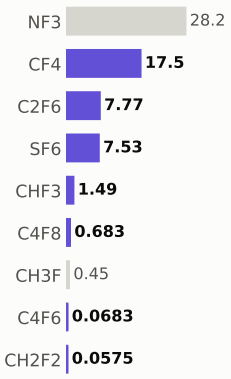

Step #25400: Dry_etch

etch_strip · Dry_etch

0.801	2,816.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

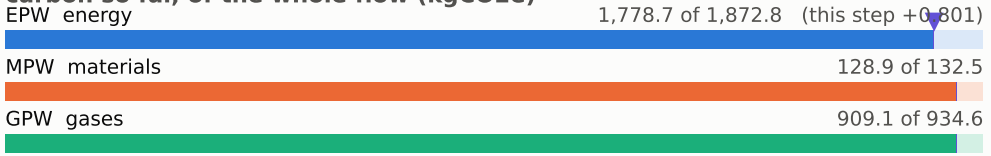

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

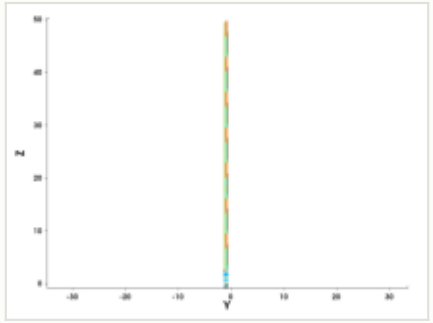

y cut at -1.035 µm

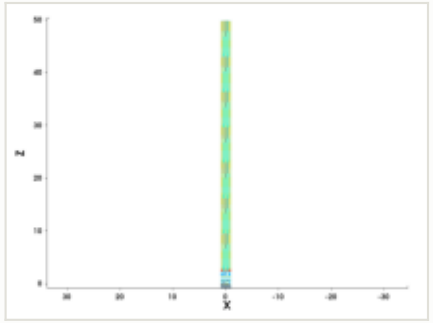

mask for this step

no mask for this step

steps by process area

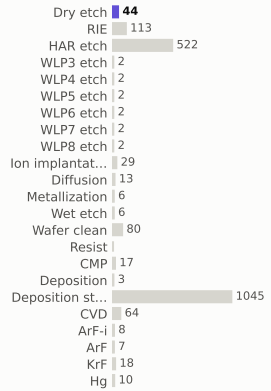

materials deposited (g)

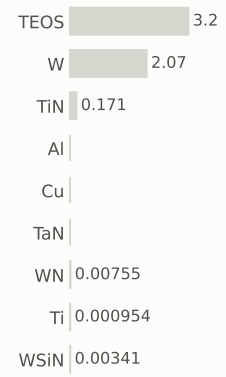

gases emitted (g)

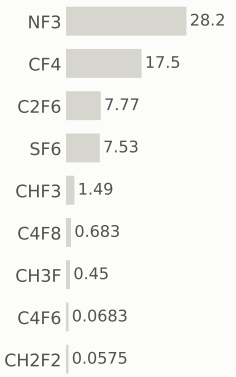

Step #25410: Wafer_clean

clean · Wafer_clean

0.169	2,816.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

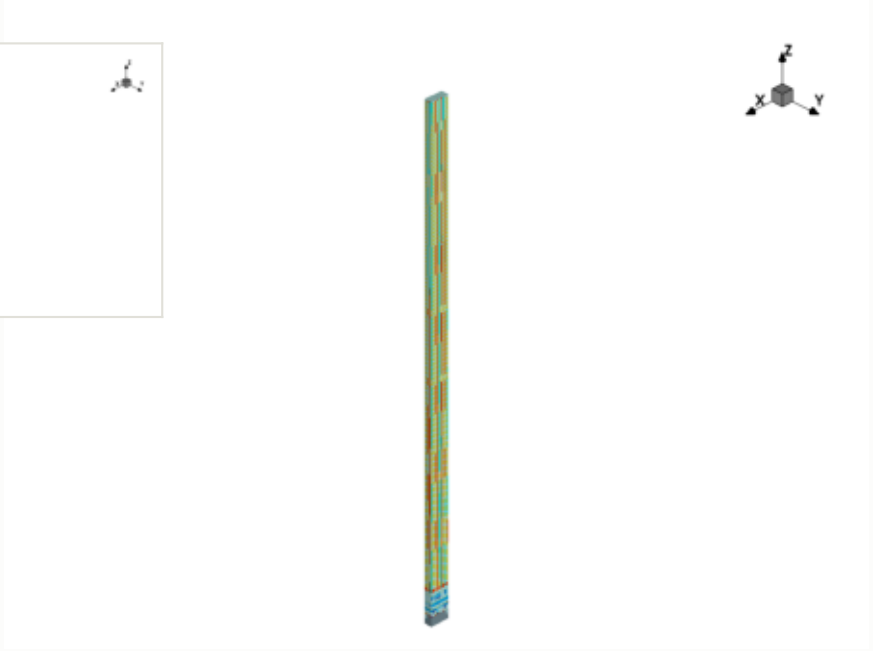

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

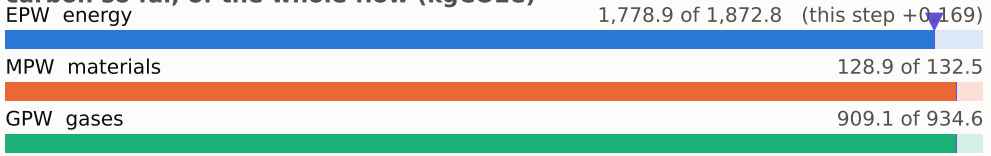

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

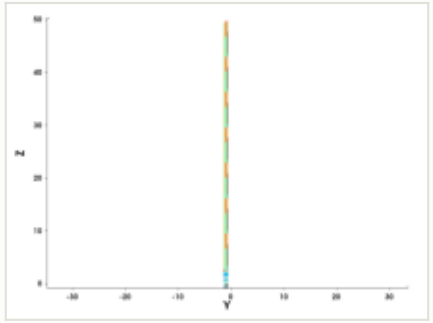

y cut at -1.035 µm

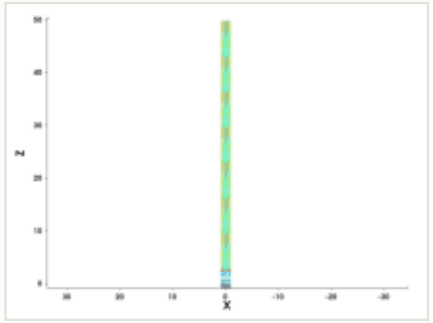

mask for this step

no mask for this step

steps by process area

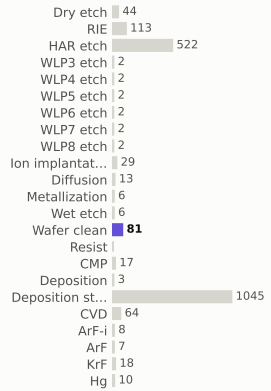

materials deposited (g)

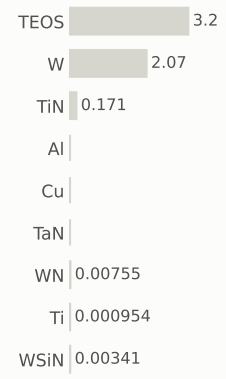

gases emitted (g)

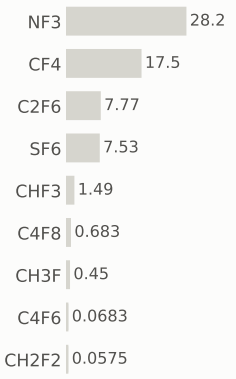

Step #25420: CVD

depo_isotropic · CVD

1.31	2,818.1	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

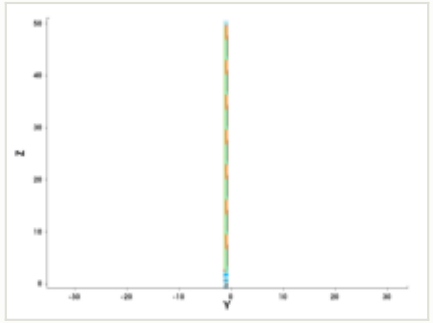

y cut at -1.035 µm

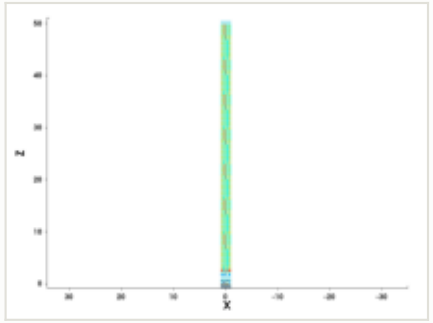

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.7 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

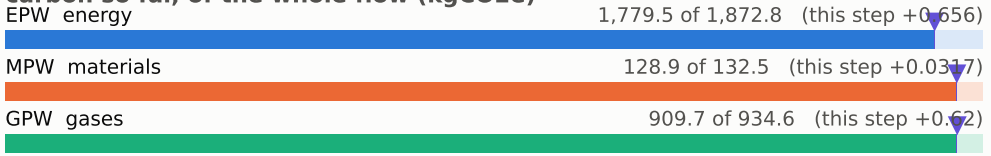

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

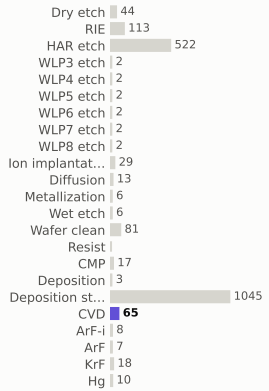

materials deposited (g)

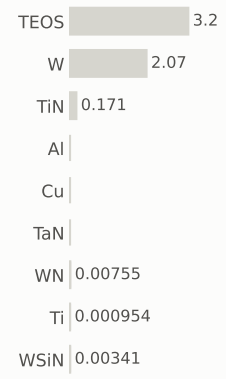

gases emitted (g)

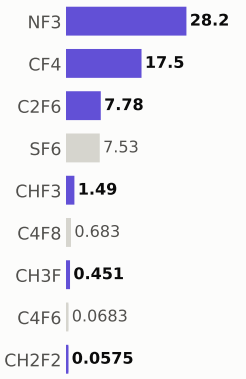

Step #25430: CMP

etch_cmp · CMP

0.169	2,818.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

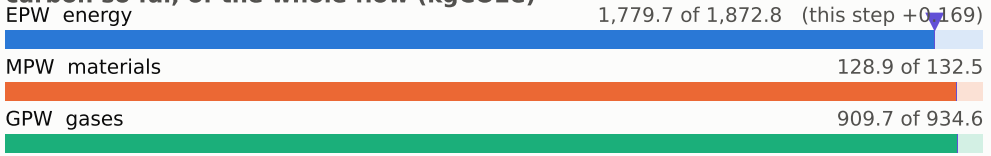

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

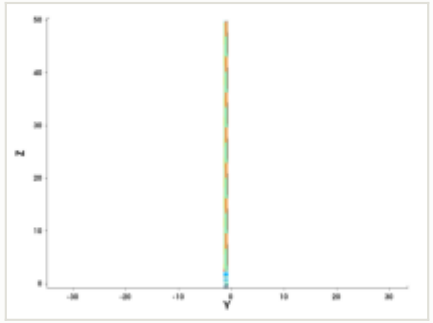

y cut at -1.035 µm

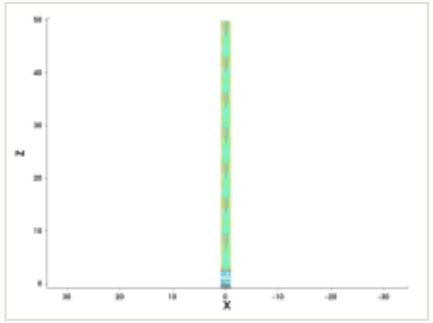

mask for this step

no mask for this step

steps by process area

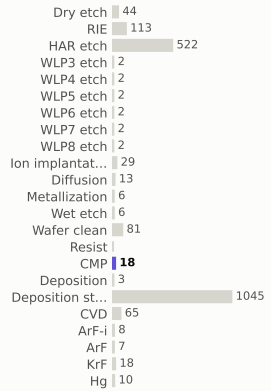

materials deposited (g)



gases emitted (g)

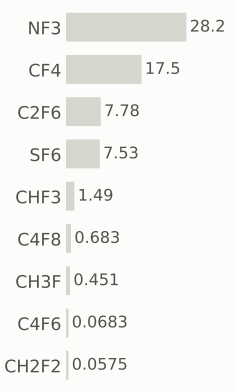

Step #25440: Wafer_clean

clean · Wafer_clean

0.169	2,818.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

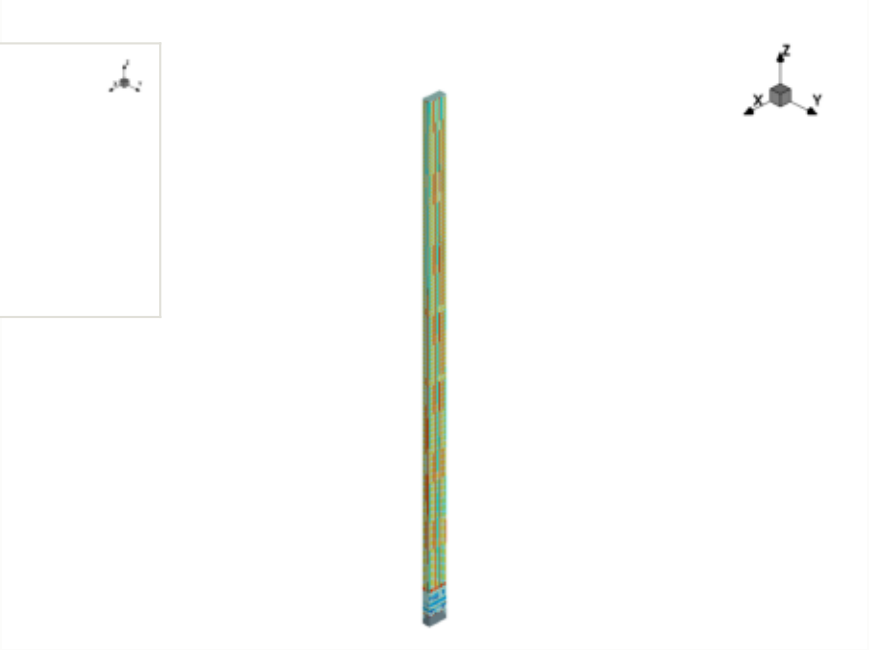

x cut at 0.000 µm

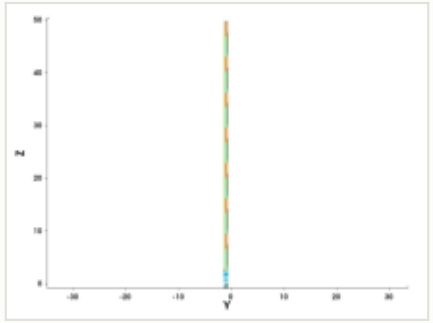

y cut at -1.035 µm

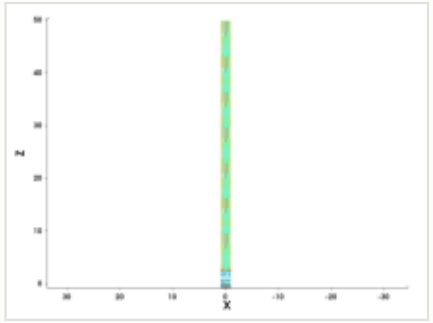

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

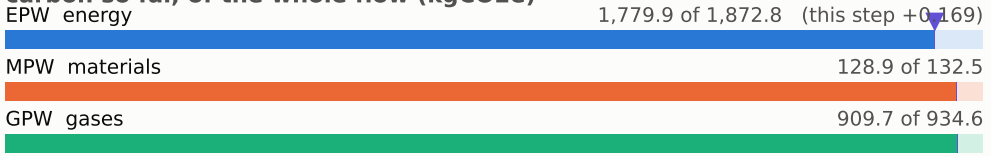

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

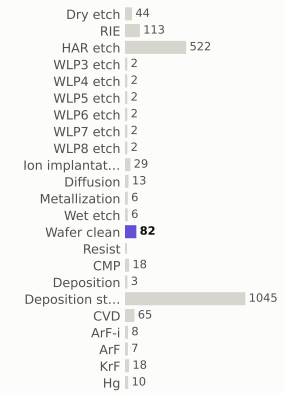

materials deposited (g)

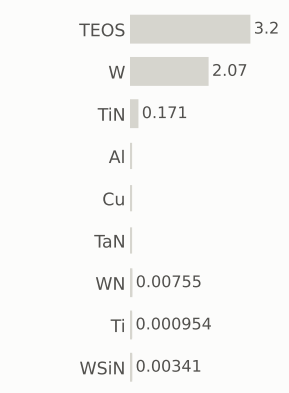

gases emitted (g)

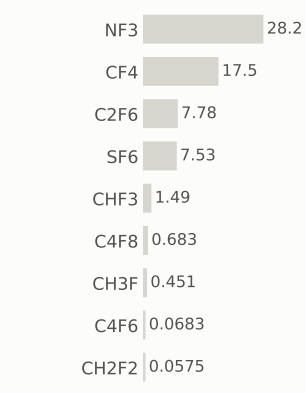

Step #25460: CVD

depo_isotropic · CVD

1.31	2,819.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

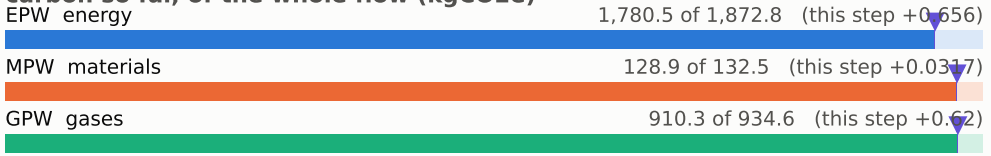

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

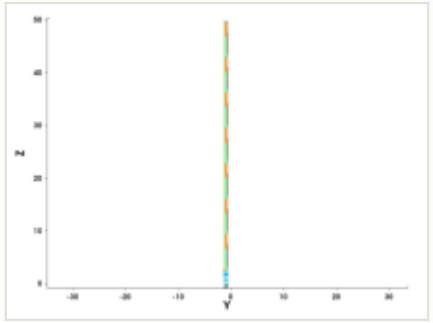

y cut at -1.035 µm

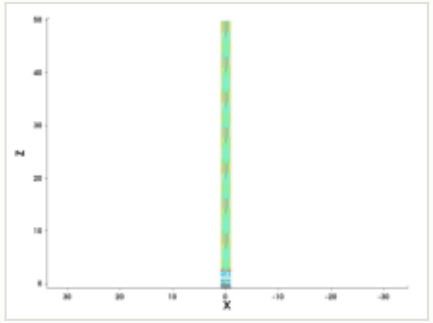

mask for this step

no mask for this step

steps by process area

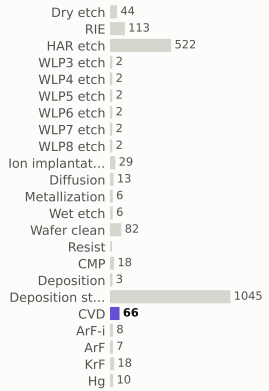

materials deposited (g)

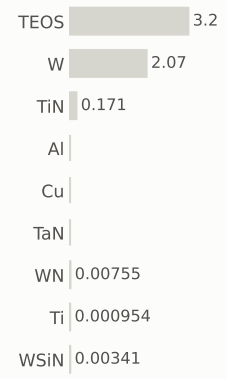

gases emitted (g)

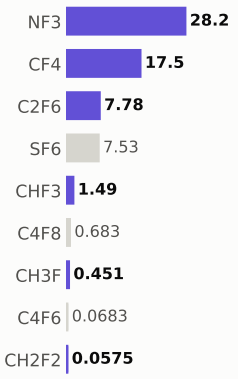

Step #25470: KrF

litho_patterning · KrF

0.199	2,819.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

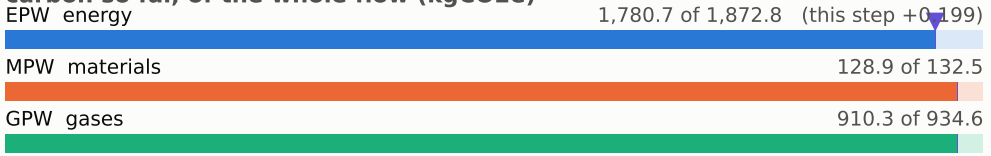

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

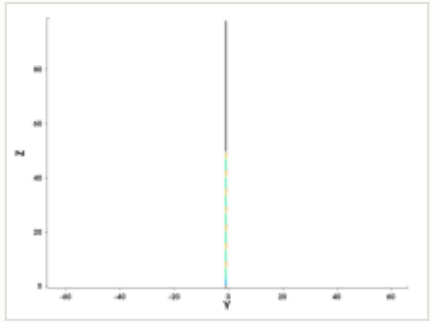

y cut at -1.035 µm

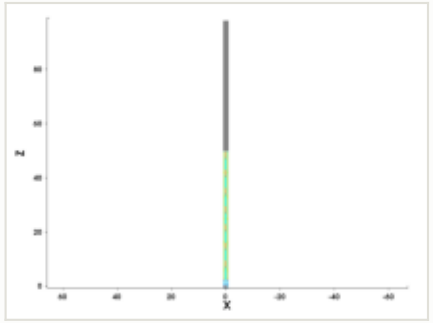

mask: layer 37:0 (OASIS)

steps by process area

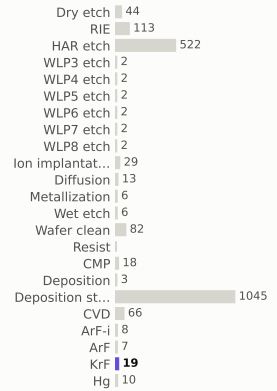

materials deposited (g)

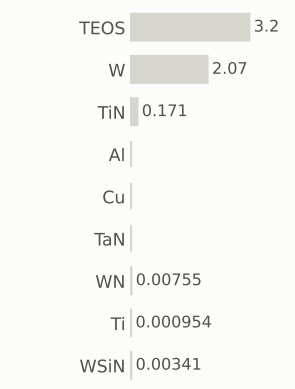

gases emitted (g)

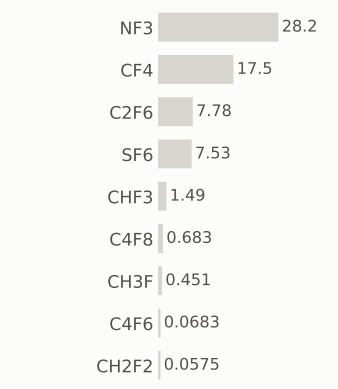

Step #25480: RIE

etch_anisotropic · RIE

1.04	2,821.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

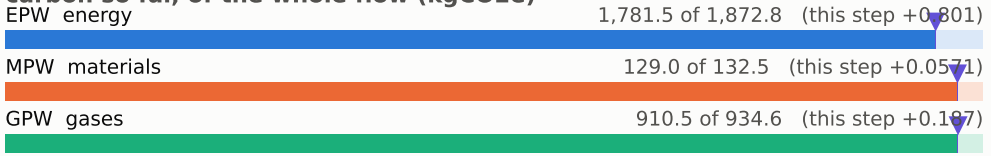

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

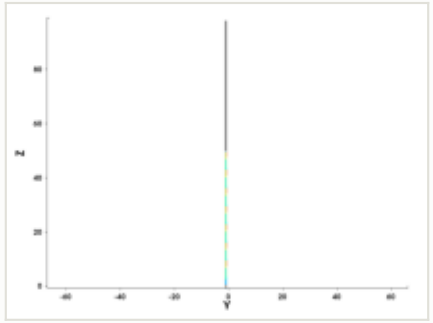

y cut at -1.035 µm

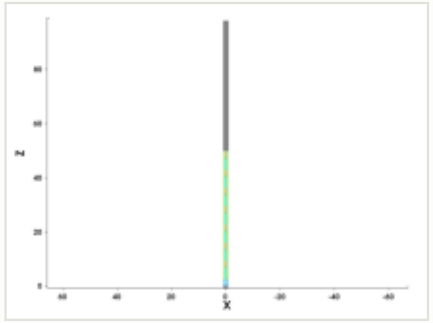

mask for this step

no mask for this step

steps by process area

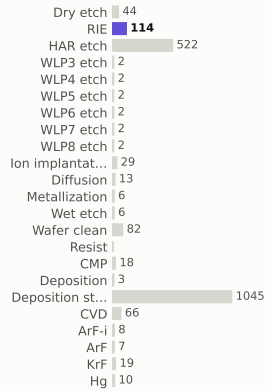

materials deposited (g)

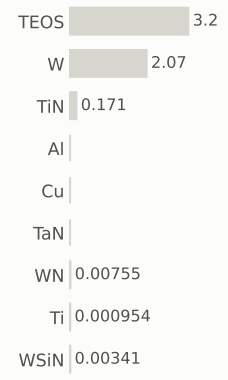

gases emitted (g)

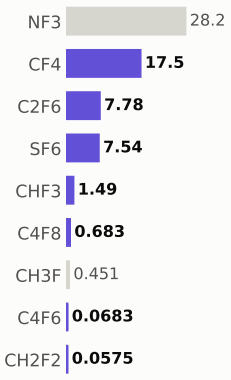

Step #25490: RIE

etch_anisotropic · RIE

1.04	2,822.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

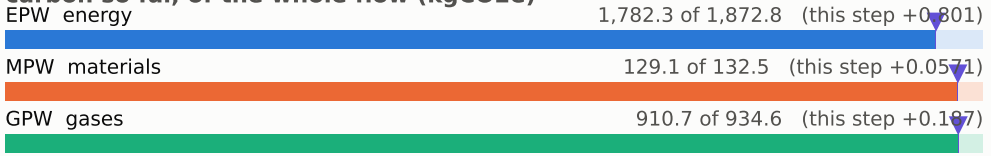

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

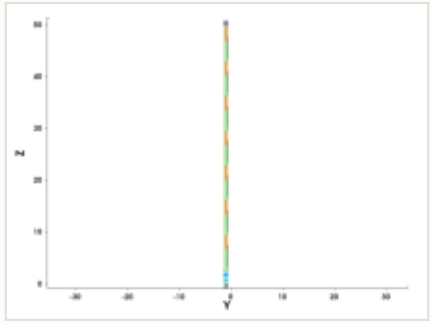

y cut at -1.035 µm

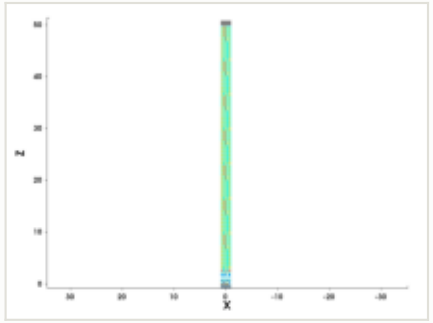

mask for this step

no mask for this step

steps by process area

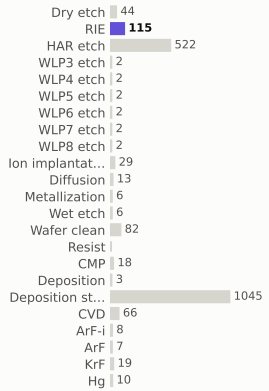

materials deposited (g)

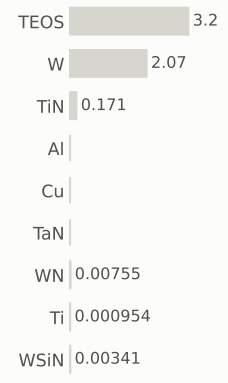

gases emitted (g)

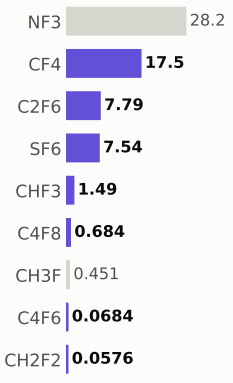

Step #25500: RIE

etch_anisotropic · RIE

1.04	2,823.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

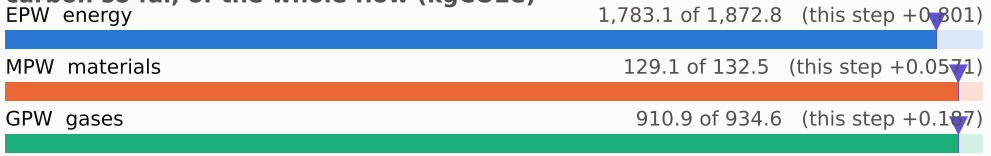

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

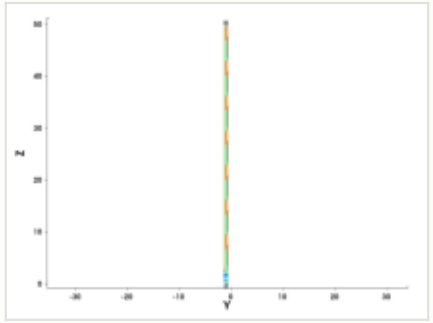

y cut at -1.035 µm

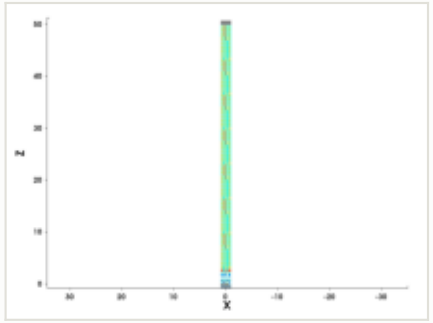

mask for this step

no mask for this step

steps by process area

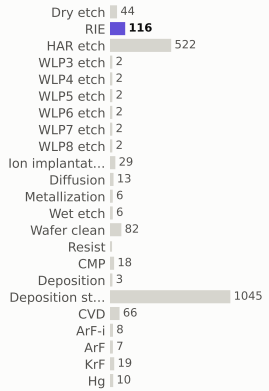

materials deposited (g)

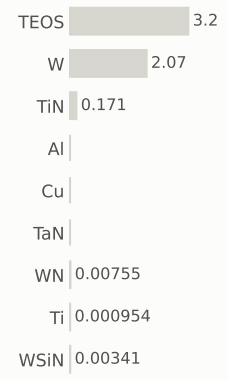

gases emitted (g)

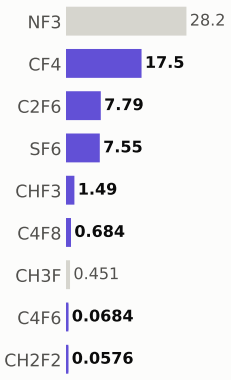

Step #25510: Dry_etch

etch_strip · Dry_etch

0.801	2,823.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

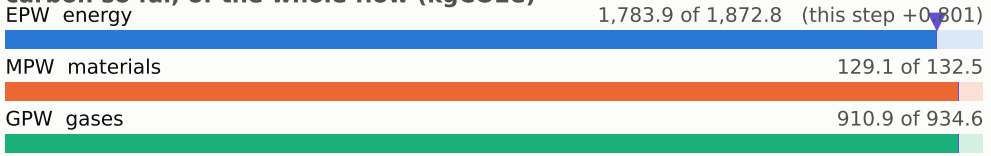

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

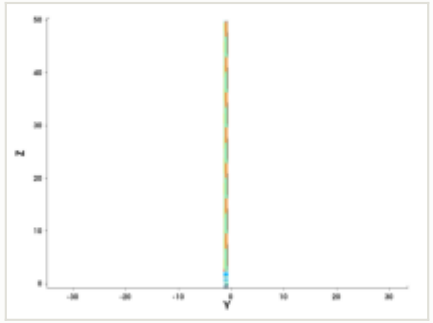

y cut at -1.035 µm

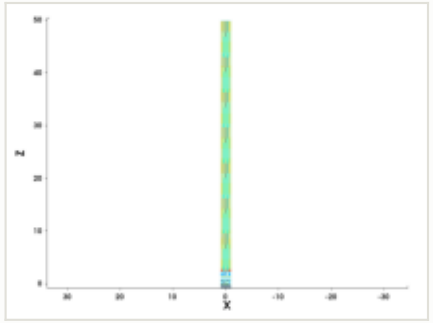

mask for this step

no mask for this step

steps by process area

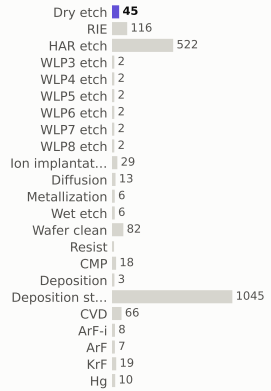

materials deposited (g)



gases emitted (g)

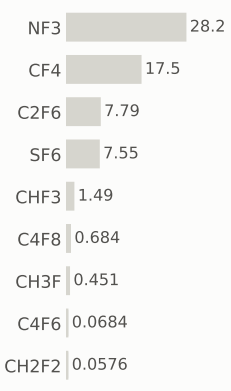

Step #25520: Wafer_clean

clean · Wafer_clean

0.169	2,824.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

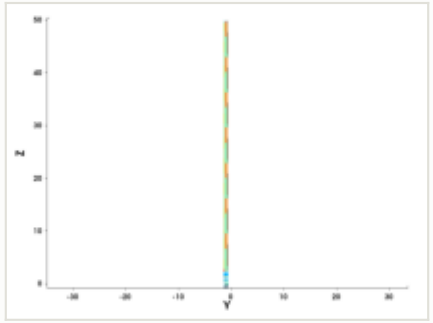

y cut at -1.035 µm

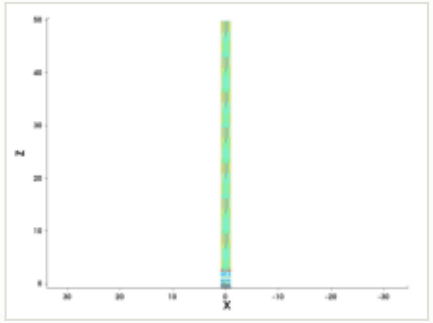

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

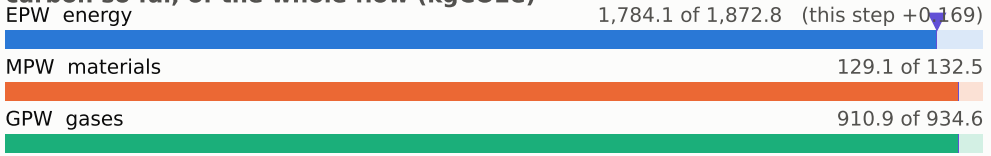

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

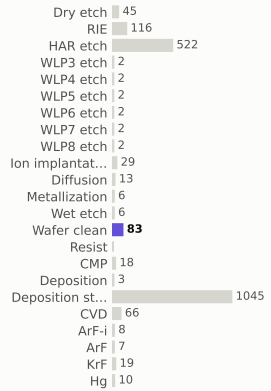

materials deposited (g)

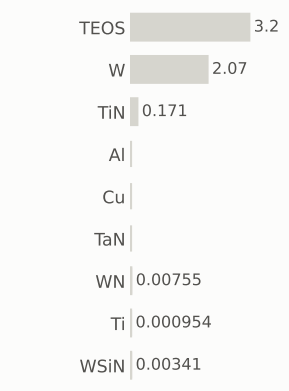

gases emitted (g)

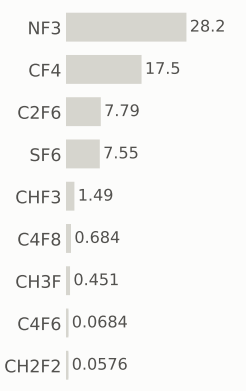

Step #25530: Deposition

depo_isotropic · Deposition

0.656	2,824.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

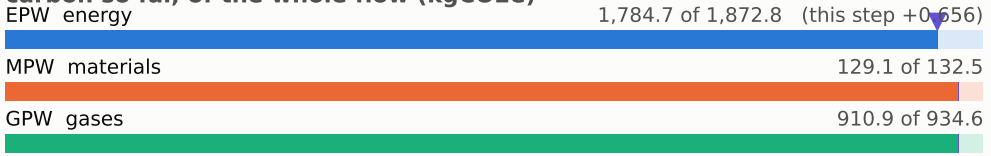

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

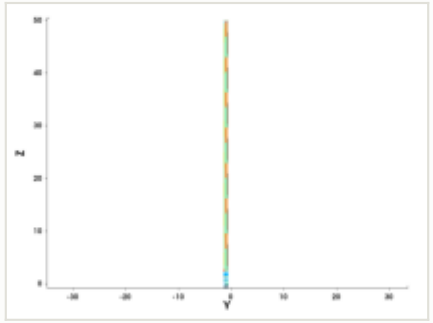

y cut at -1.035 µm

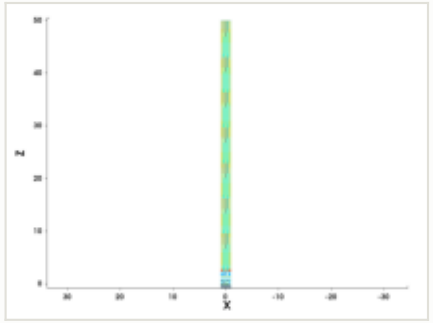

mask for this step

no mask for this step

steps by process area

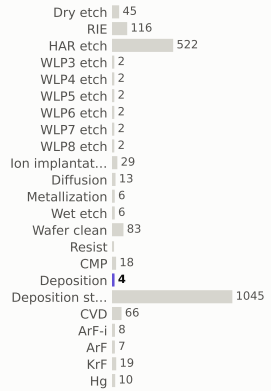

materials deposited (g)



gases emitted (g)

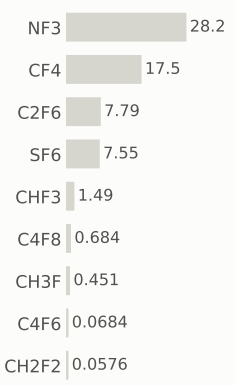

Step #25540: RIE

etch_anisotropic · RIE

1.04	2,825.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

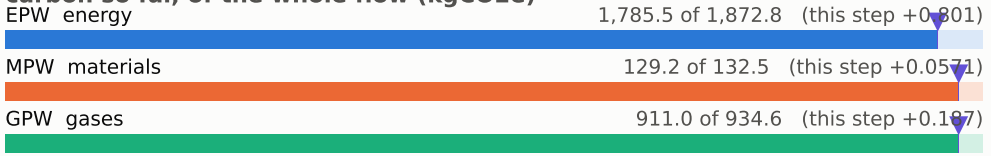

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

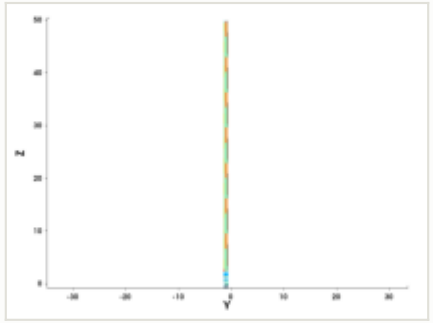

y cut at -1.035 µm

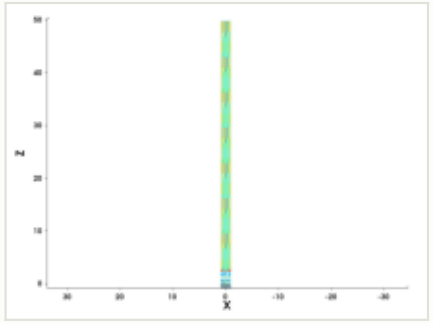

mask for this step

no mask for this step

steps by process area

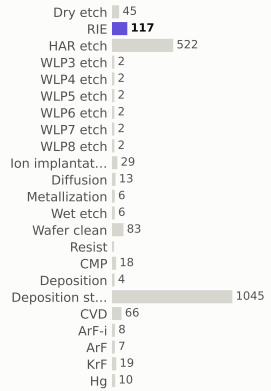

materials deposited (g)



gases emitted (g)

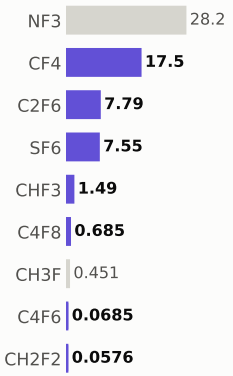

Step #25550: Wet_etch

etch_isotropic · Wet_etch

0.169	2,825.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

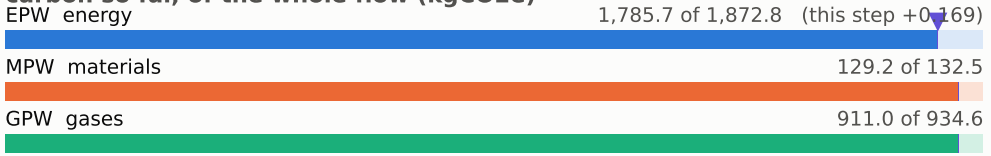

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

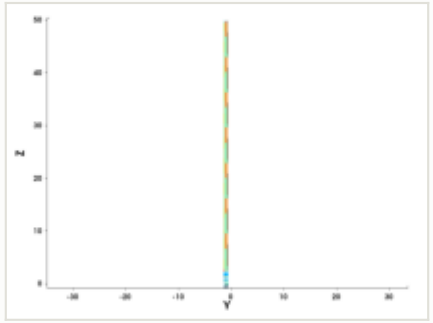

y cut at -1.035 µm

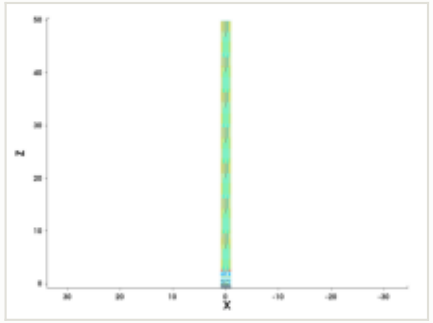

mask for this step

no mask for this step

steps by process area

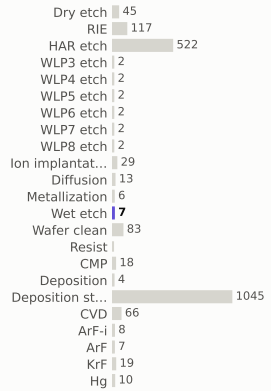

materials deposited (g)

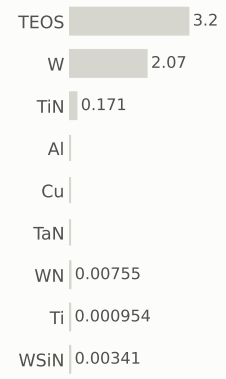

gases emitted (g)

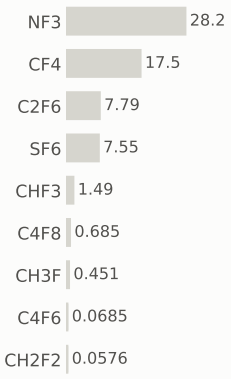

Step #25560: Wet_etch

etch_isotropic · Wet_etch

0.169	2,826.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

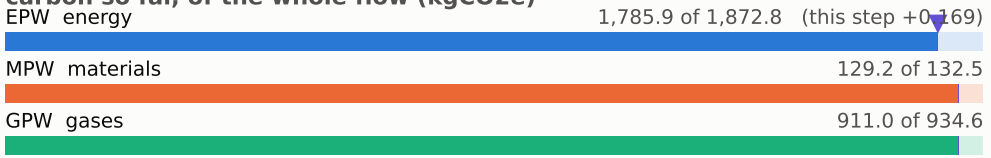

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

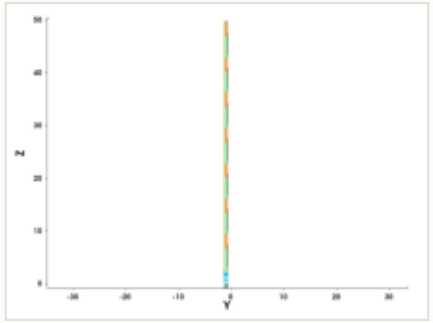

y cut at -1.035 µm

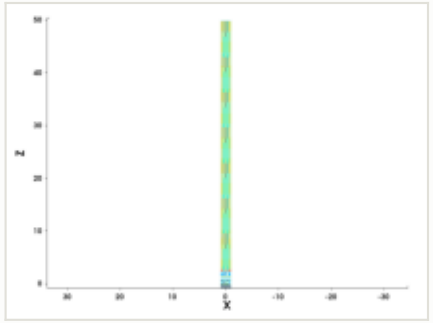

mask for this step

no mask for this step

steps by process area

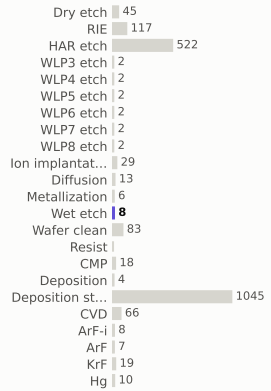

materials deposited (g)



gases emitted (g)

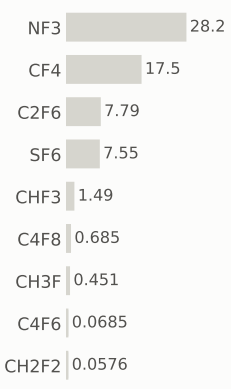

Step #25570: CVD

depo_isotropic · CVD

1.31	2,827.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

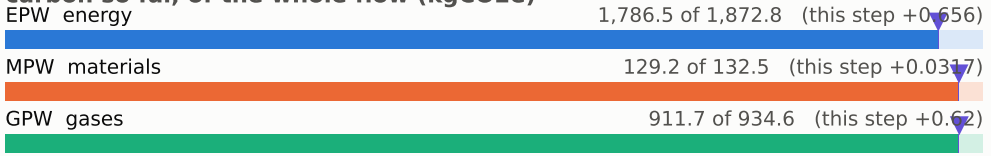

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

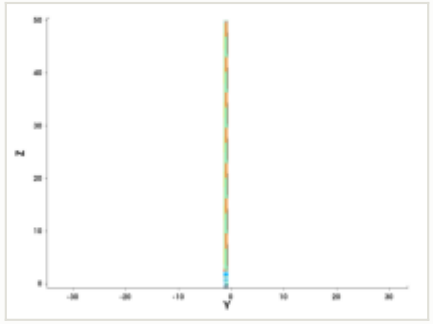

y cut at -1.035 µm

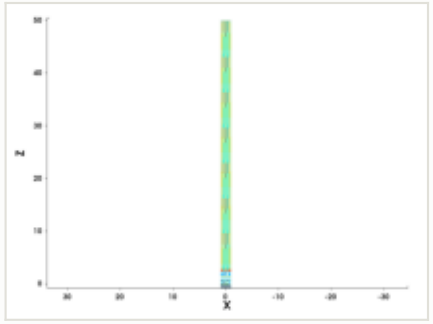

mask for this step

no mask for this step

steps by process area

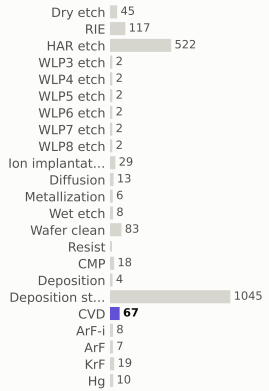

materials deposited (g)

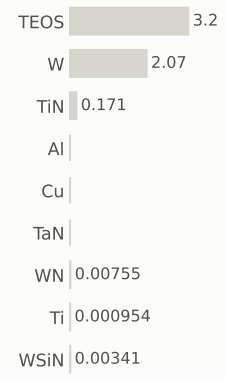

gases emitted (g)

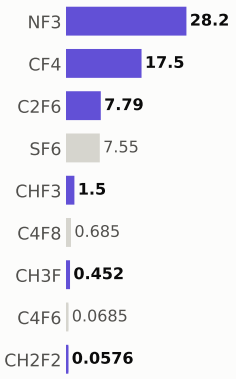

Step #25580: RIE

etch_isotropic · RIE

1.04	2,828.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

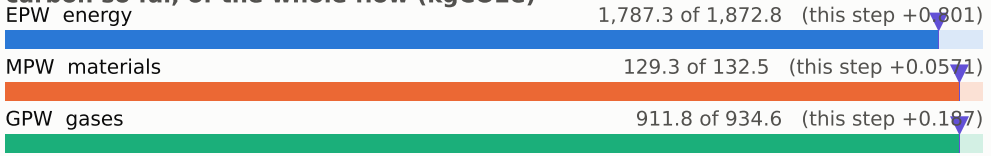

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

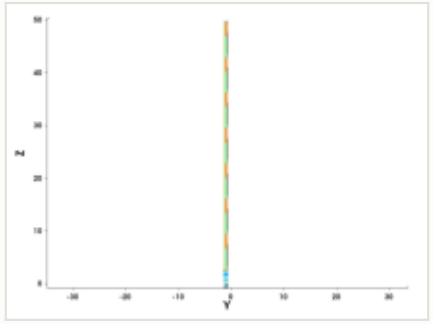

y cut at -1.035 µm

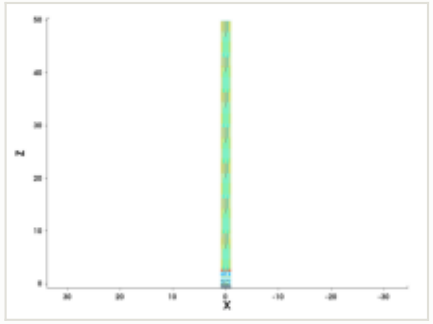

mask for this step

no mask for this step

steps by process area

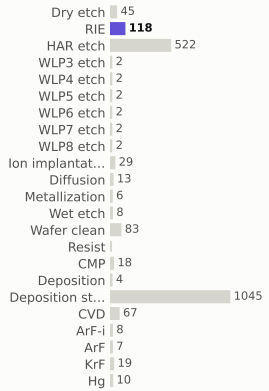

materials deposited (g)

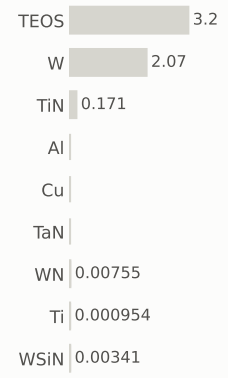

gases emitted (g)

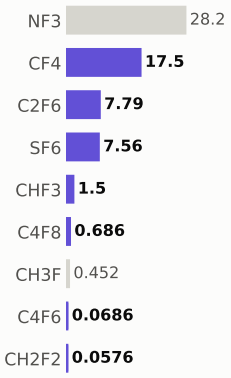

Step #25590: CVD

depo_isotropic · CVD

1.31	2,829.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

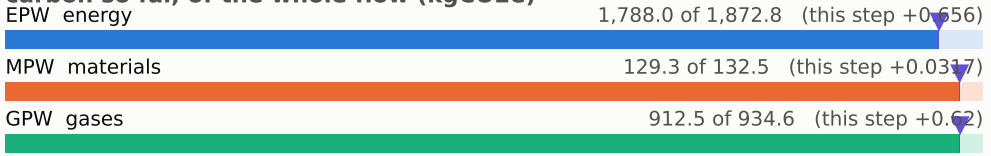

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

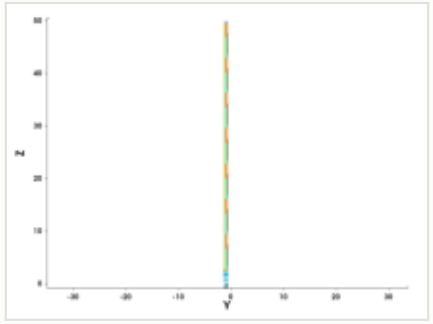

y cut at -1.035 µm

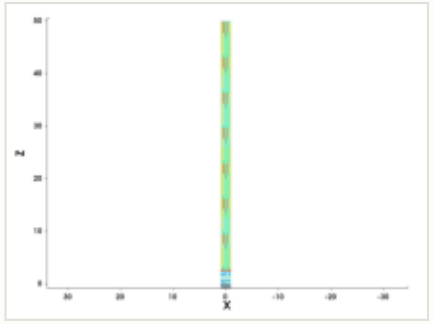

mask for this step

no mask for this step

steps by process area

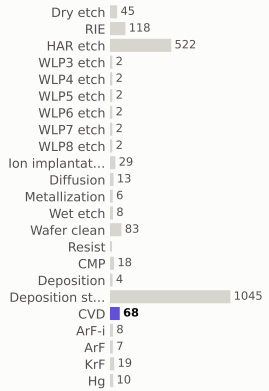

materials deposited (g)

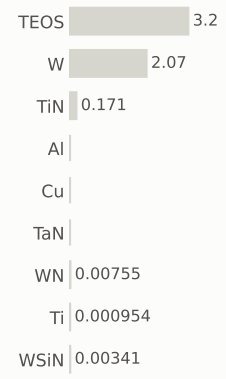

gases emitted (g)

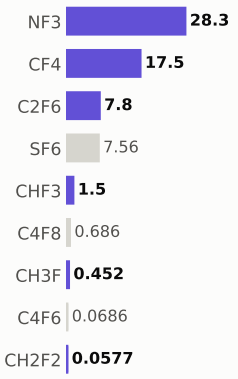

Step #25600: CMP

etch_cmp · CMP

0.169	2,829.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

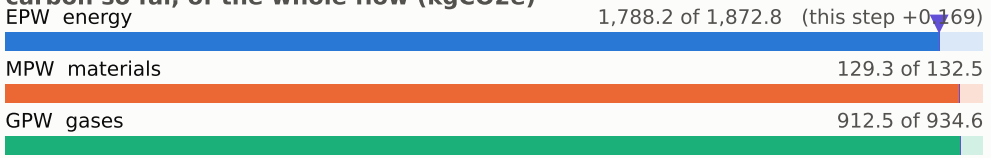

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

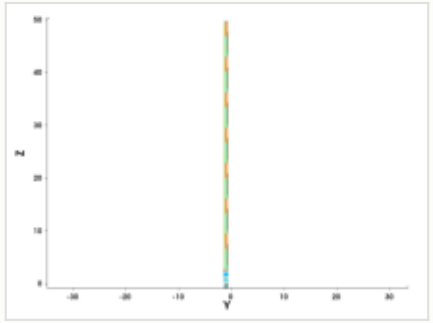

y cut at -1.035 µm

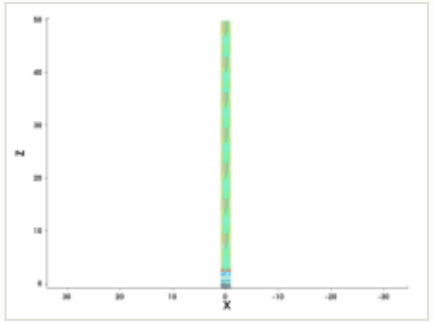

mask for this step

no mask for this step

steps by process area

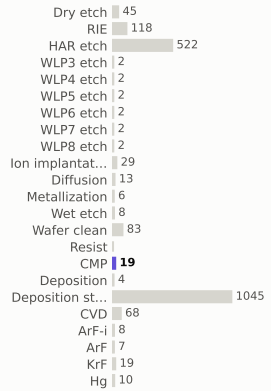

materials deposited (g)

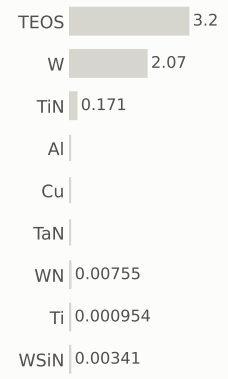

gases emitted (g)

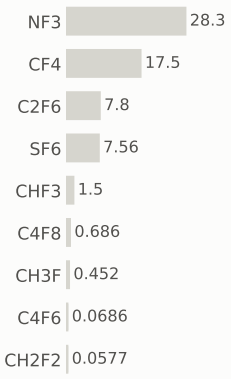

Step #25610: Wafer_clean

clean · Wafer_clean

0.169	2,830.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

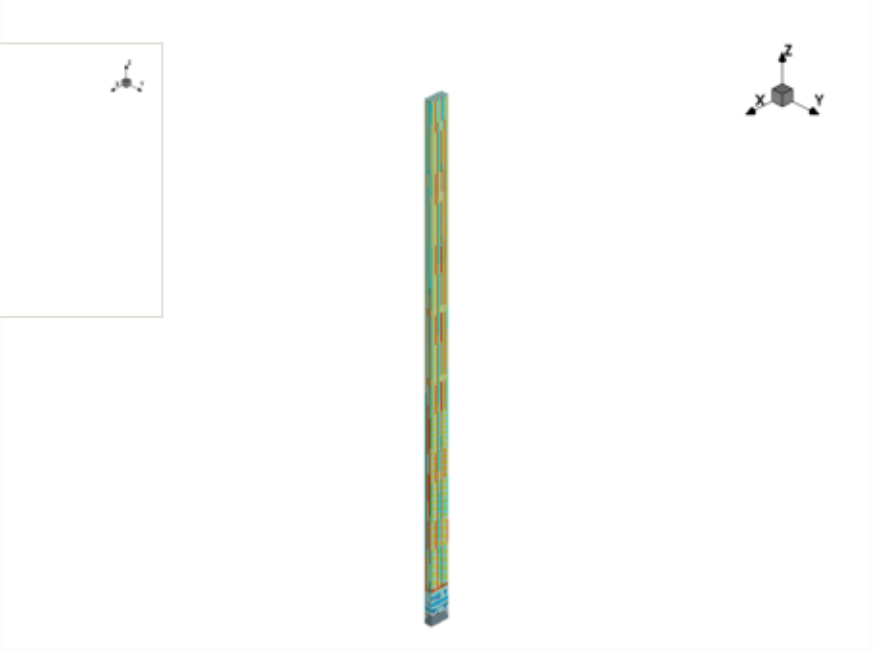

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

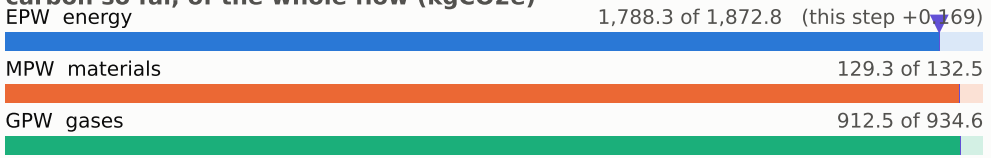

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

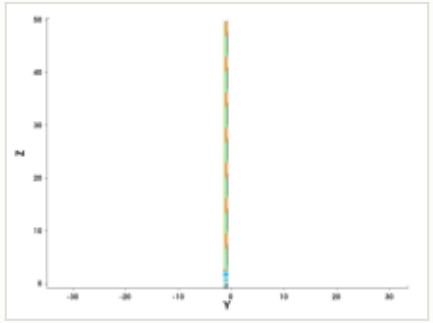

y cut at -1.035 µm

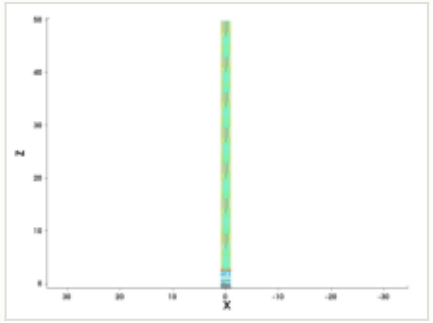

mask for this step

no mask for this step

steps by process area

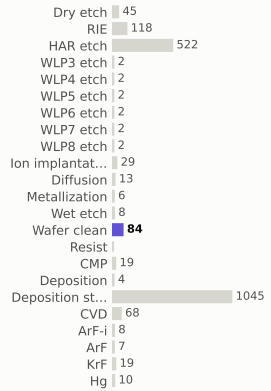

materials deposited (g)

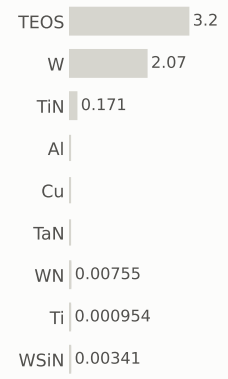

gases emitted (g)

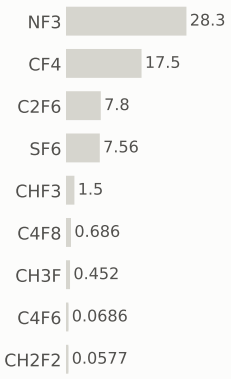

Step #25630: ArF

litho_patterning · ArF

0.199	2,830.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

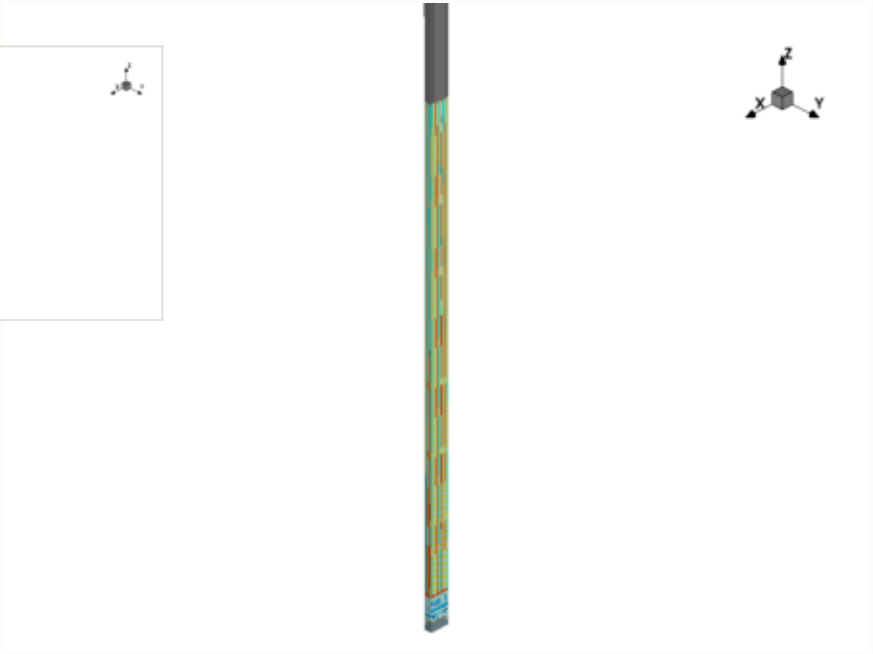

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

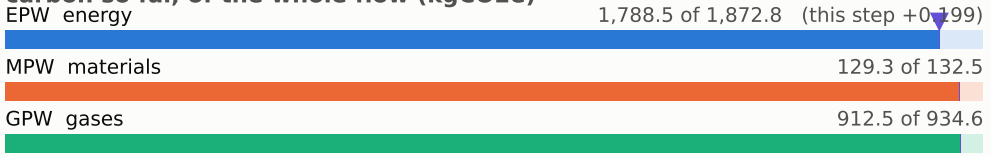

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

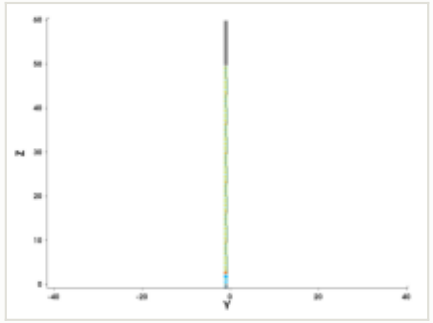

y cut at -1.035 µm

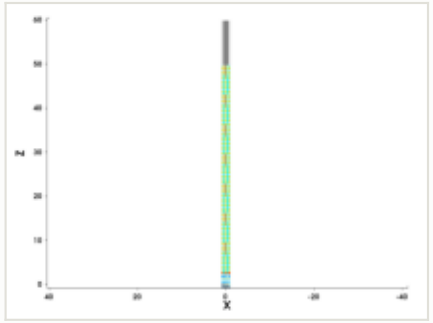

mask: layer 38:0 (OASIS)

steps by process area

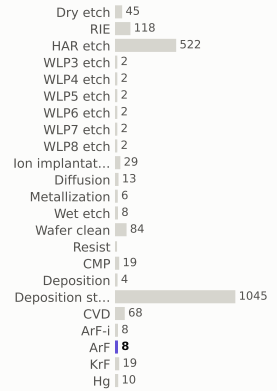

materials deposited (g)

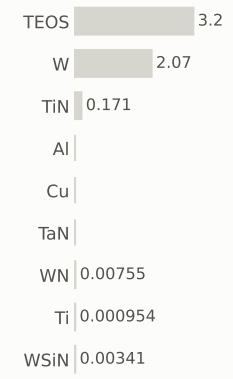

gases emitted (g)

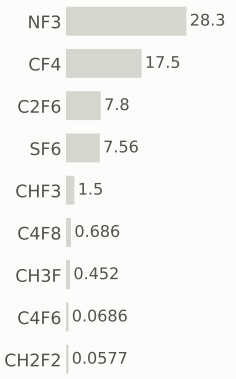

Step #25640: HAR_etch

etch_anisotropic · HAR_etch

1.04	2,831.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

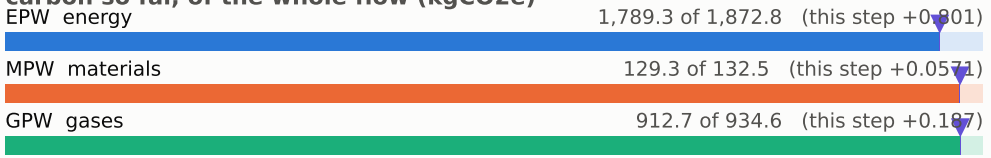

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

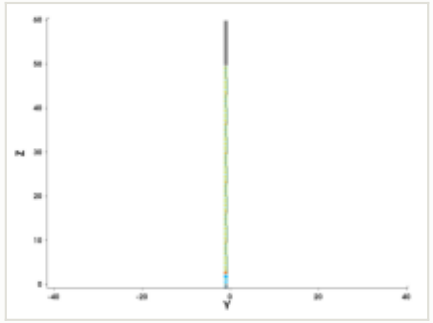

y cut at -1.035 µm

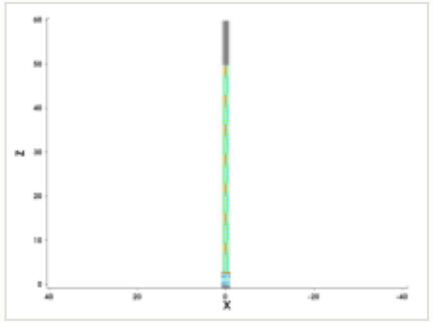

mask for this step

no mask for this step

steps by process area

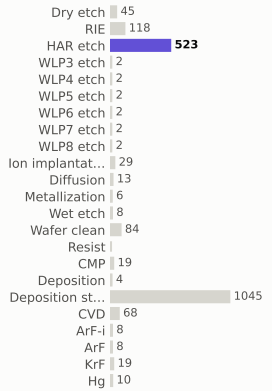

materials deposited (g)

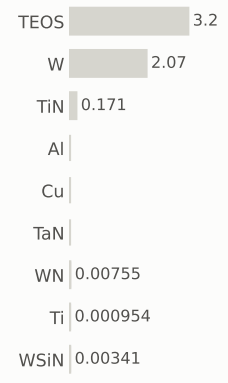

gases emitted (g)

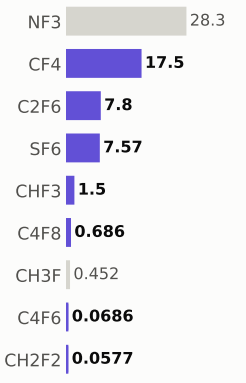

Step #25650: HAR_etch

etch_multi_offset · HAR_etch

1.04	2,832.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

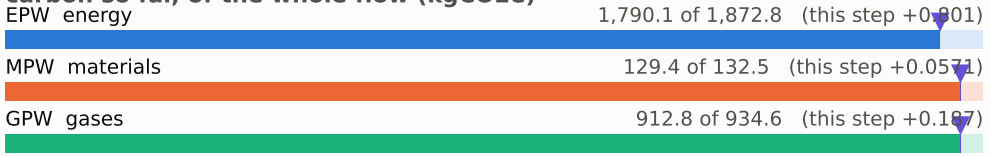

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

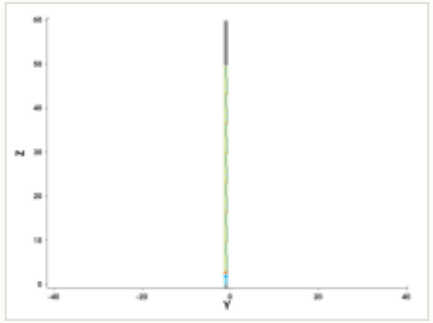

y cut at -1.035 µm

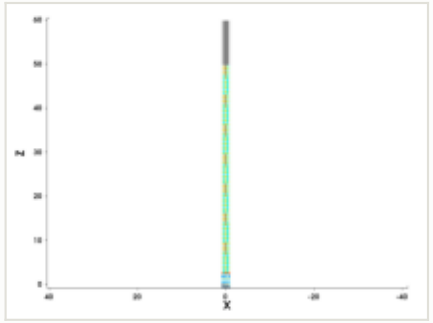

mask for this step

no mask for this step

steps by process area

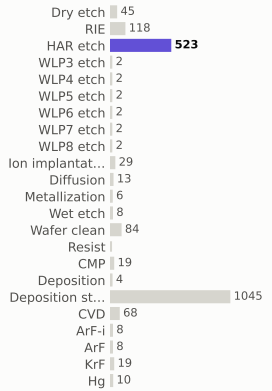

materials deposited (g)

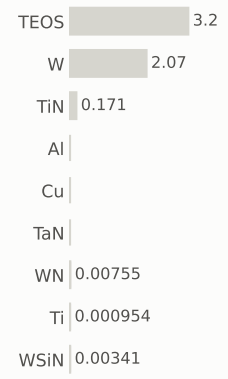

gases emitted (g)

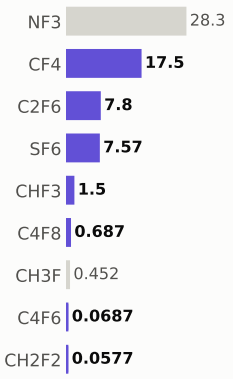

Step #25660: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	2,833.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

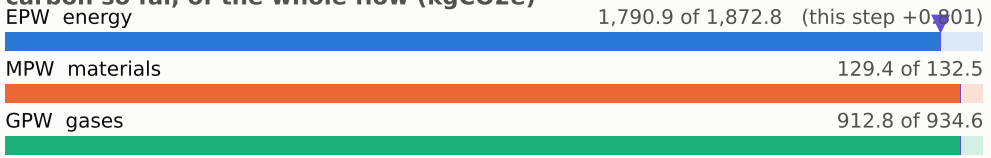

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

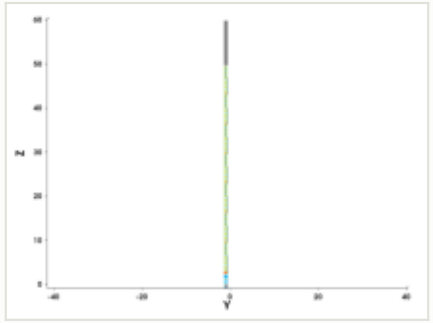

y cut at -1.035 µm

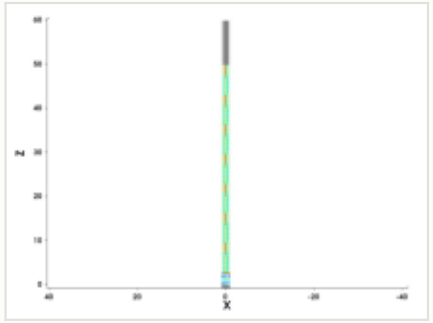

mask for this step

no mask for this step

steps by process area

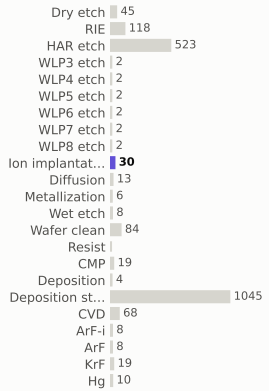

materials deposited (g)

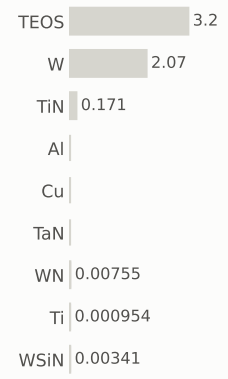

gases emitted (g)

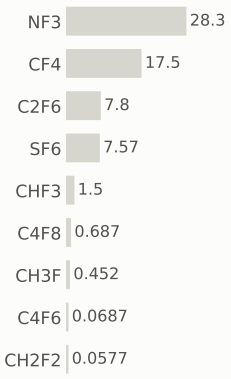

Step #25670: Dry_etch

etch_strip · Dry_etch

0.801	2,834.0	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

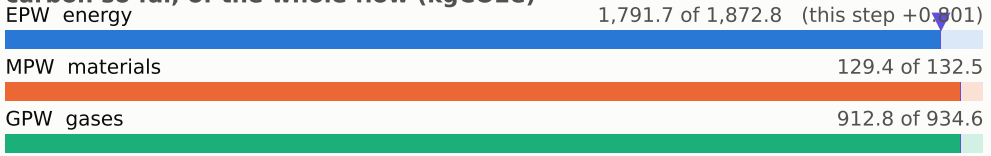

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

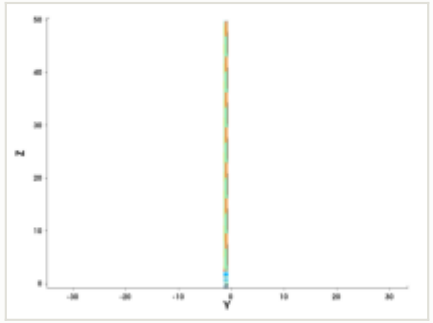

y cut at -1.035 µm

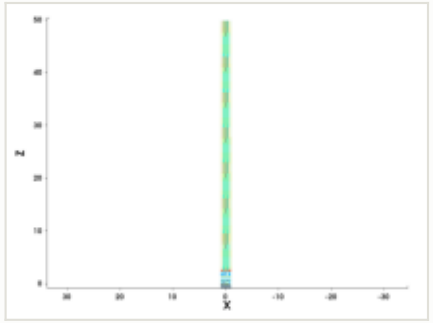

mask for this step

no mask for this step

steps by process area

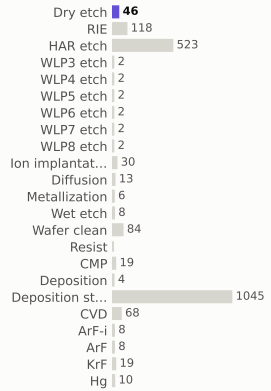

materials deposited (g)

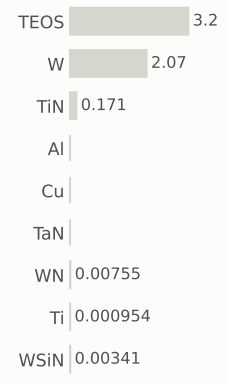

gases emitted (g)

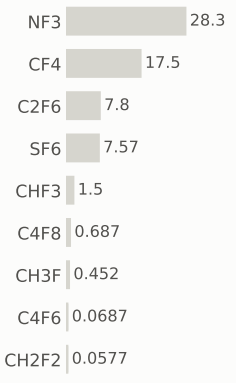

Step #25680: Wafer_clean

clean · Wafer_clean

0.169	2,834.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

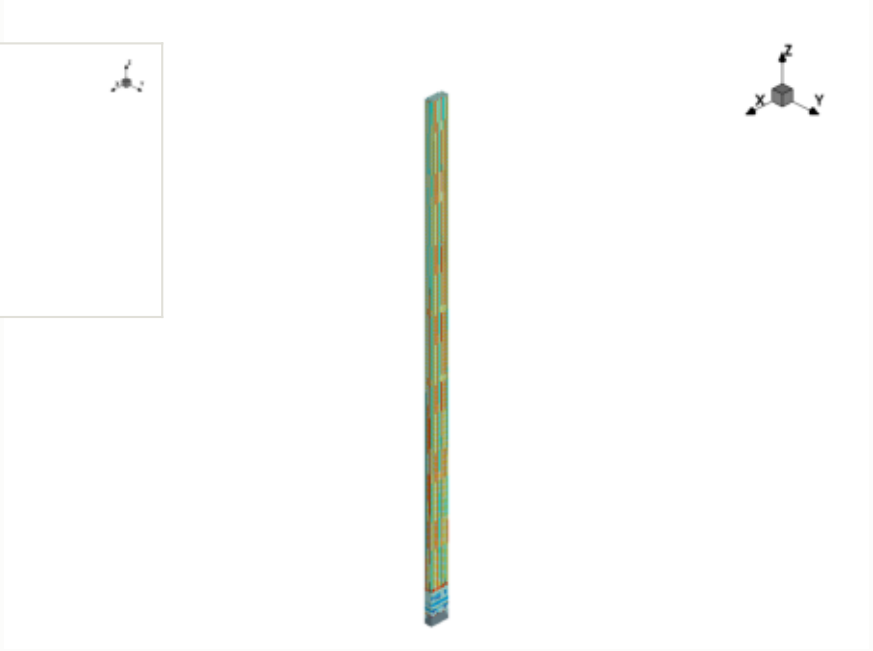

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

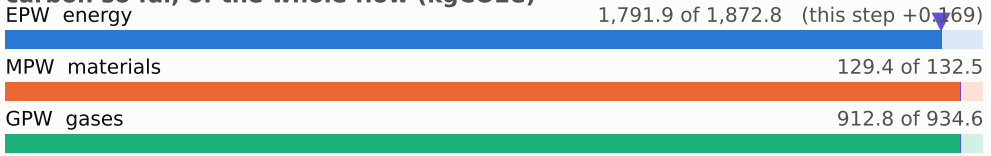

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

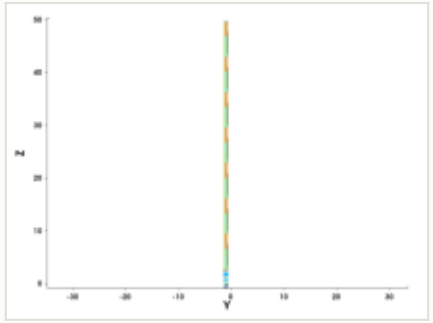

y cut at -1.035 µm

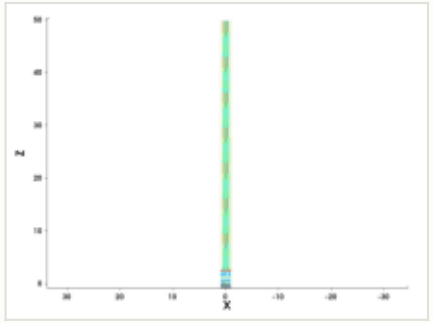

mask for this step

no mask for this step

steps by process area

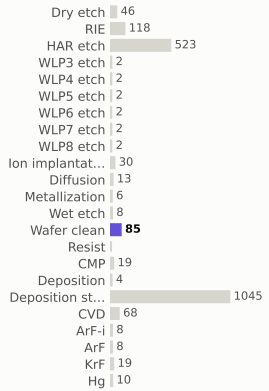

materials deposited (g)

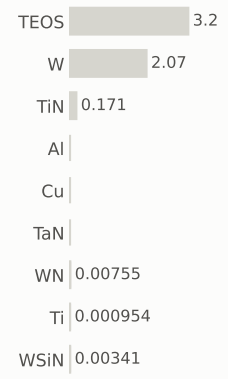

gases emitted (g)

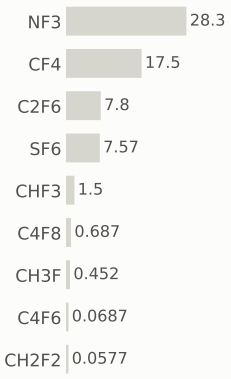

Step #25690: Wet_etch

etch_isotropic · Wet_etch

0.169	2,834.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

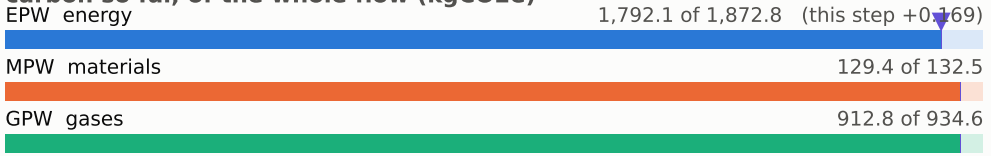

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

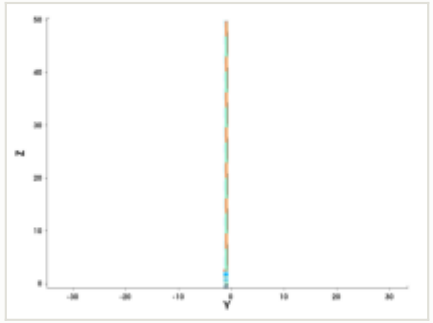

y cut at -1.035 µm

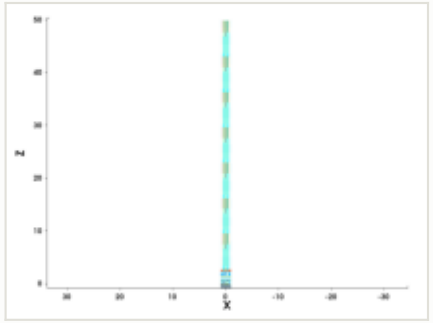

mask for this step

no mask for this step

steps by process area

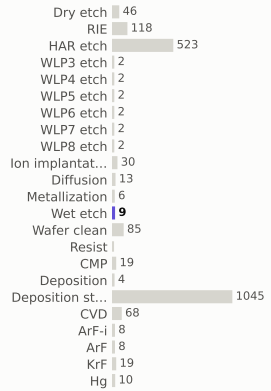

materials deposited (g)

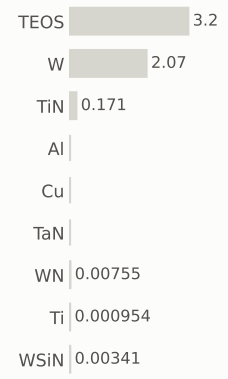

gases emitted (g)

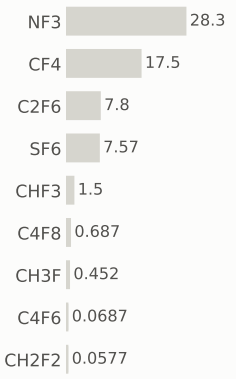

Step #25700: Spx_only

etch_isotropic · Spx_only

0	2,834.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

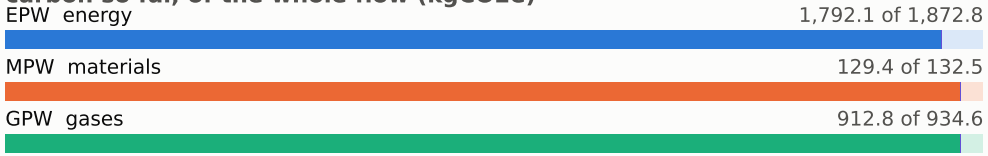

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

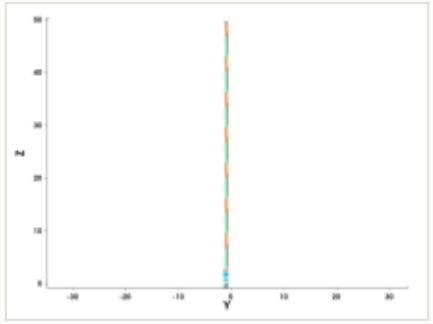

y cut at -1.035 µm

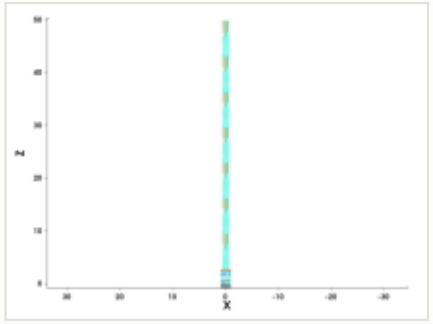

mask for this step

no mask for this step

steps by process area

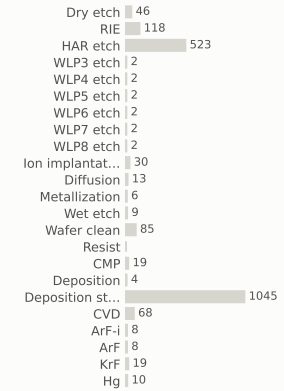

materials deposited (g)

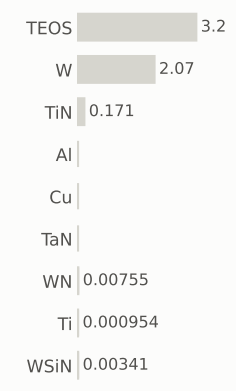

gases emitted (g)

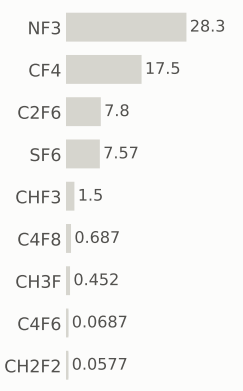

Step #25710: Diffusion

depo_isotropic · Diffusion

0.801	2,835.1	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	0.03 µm	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

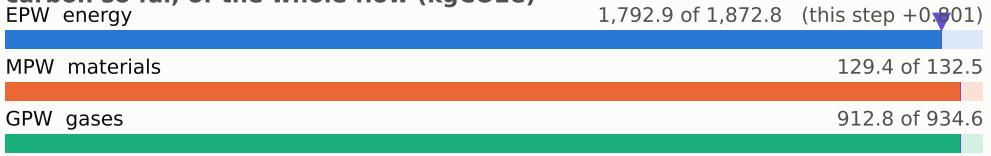

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

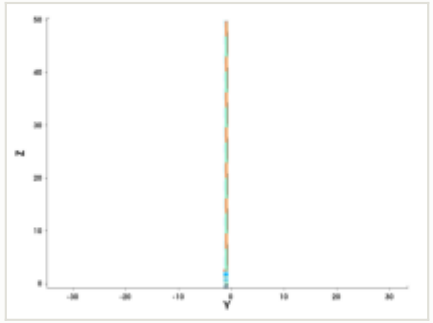

y cut at -1.035 µm

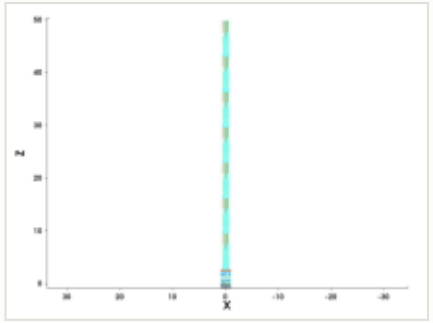

mask for this step

no mask for this step

steps by process area

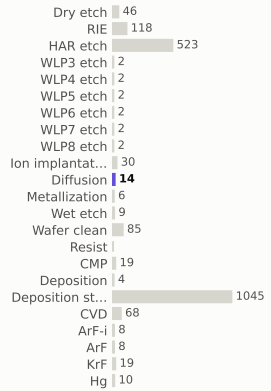

materials deposited (g)

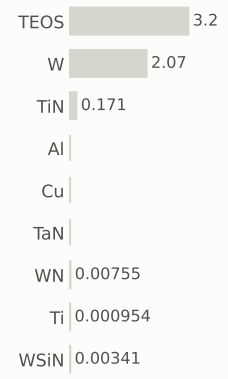

gases emitted (g)

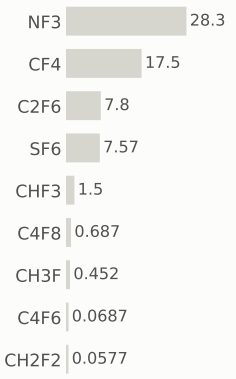

Step #25720: Deposition

depo_isotropic · Deposition

0.656	2,835.8	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.002 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

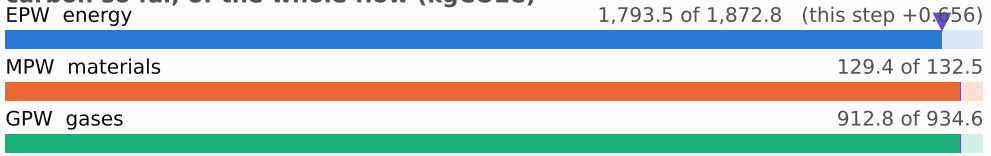

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

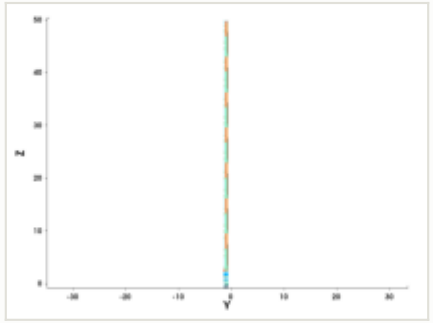

y cut at -1.035 µm

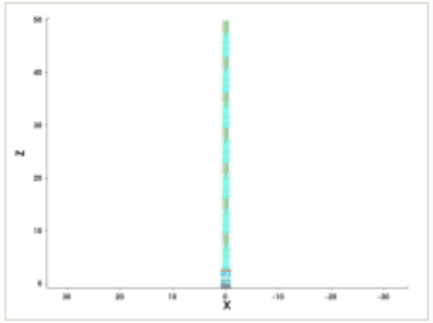

mask for this step

no mask for this step

steps by process area

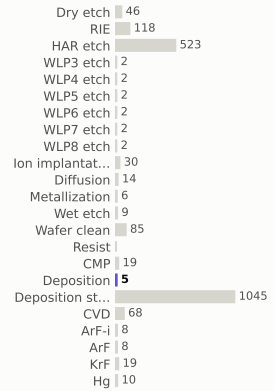

materials deposited (g)

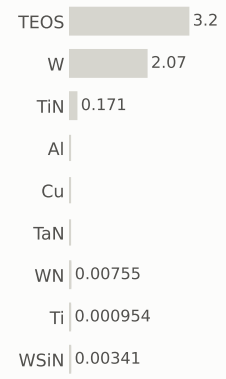

gases emitted (g)

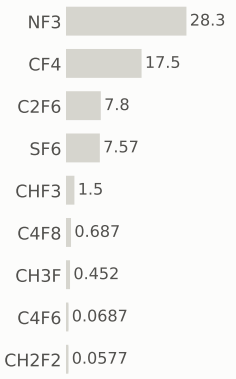

Step #25730: Diffusion

anneal · Diffusion

0.801	2,836.6	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

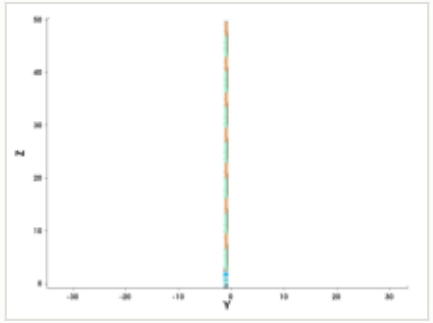

y cut at -1.035 µm

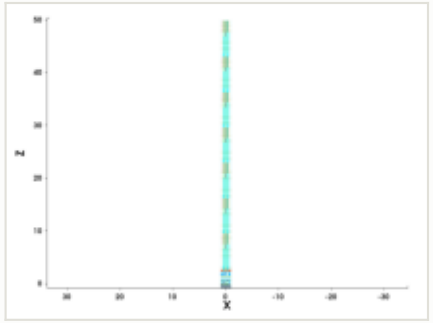

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

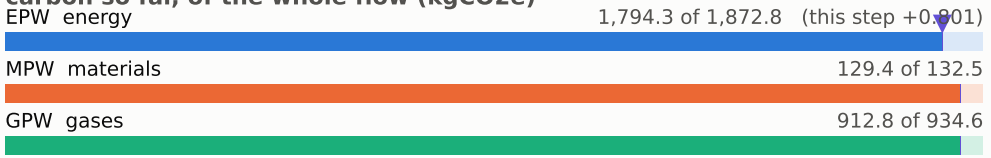

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

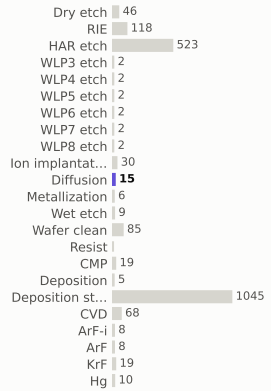

materials deposited (g)



gases emitted (g)

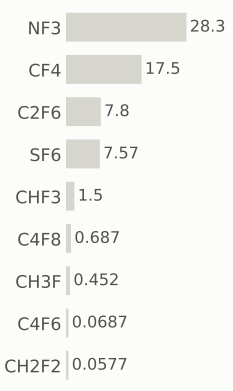

Step #25740: Deposition

depo_isotropic · Deposition

0.656	2,837.2	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.002 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	3.24e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

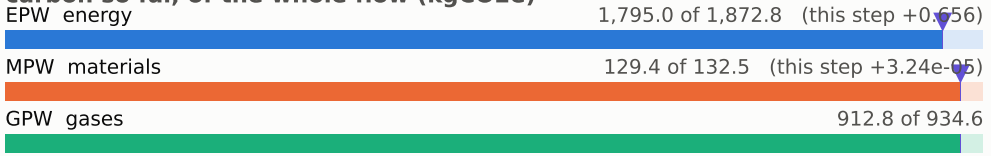

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

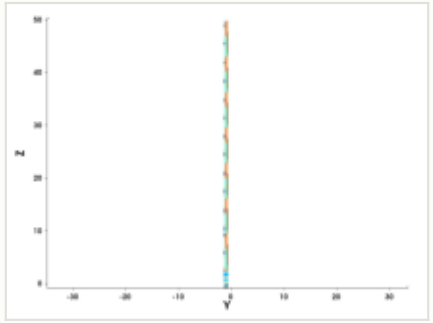

y cut at -1.035 µm

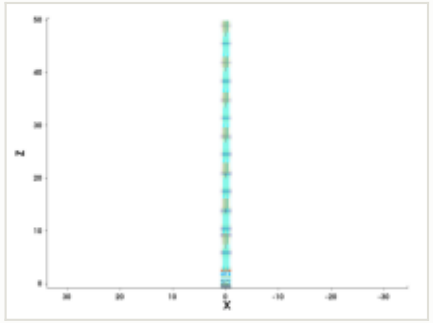

mask for this step

no mask for this step

steps by process area

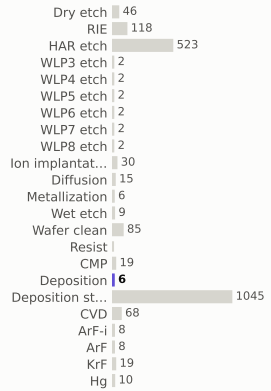

materials deposited (g)

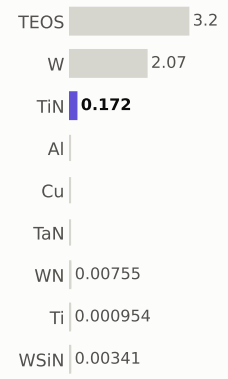

gases emitted (g)

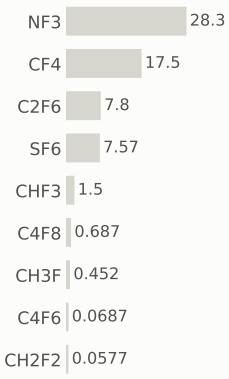

Step #25750: Metallization

depo_isotropic · Metallization

1.21	2,838.4	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

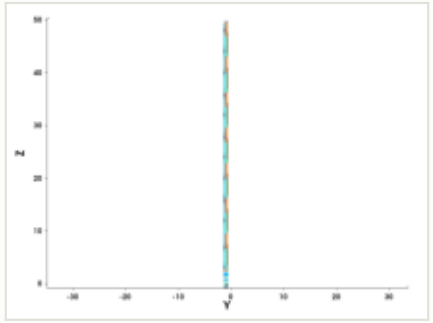

y cut at -1.035 µm

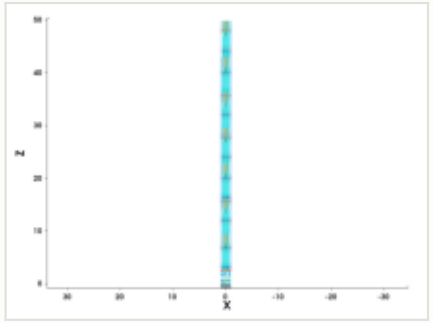

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.02 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00207 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

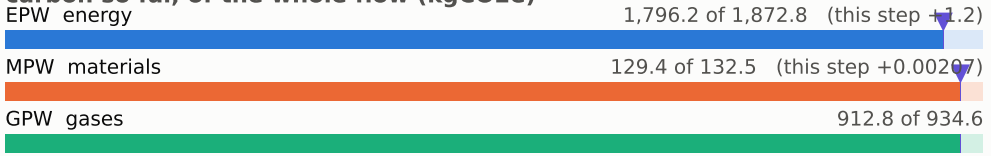

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

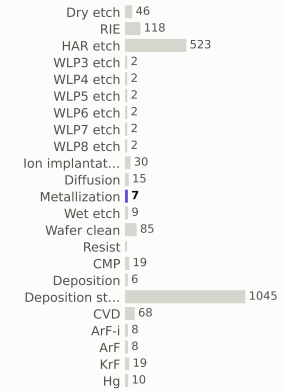

materials deposited (g)

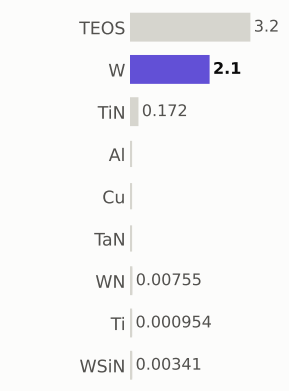

gases emitted (g)

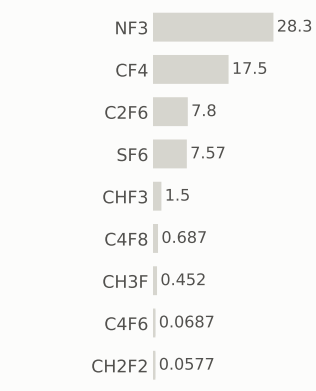

Step #25760: RIE

etch_isotropic · RIE

1.04	2,839.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

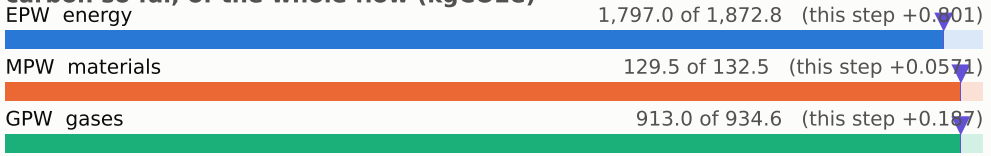

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

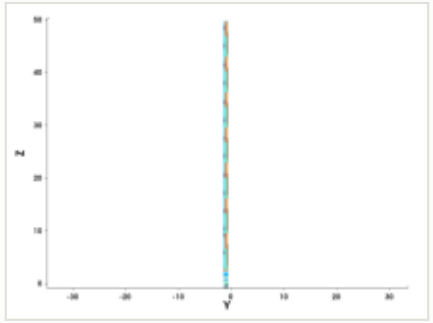

y cut at -1.035 µm

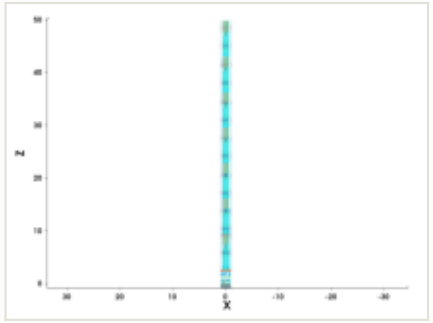

mask for this step

no mask for this step

steps by process area

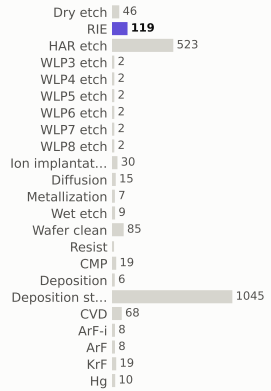

materials deposited (g)

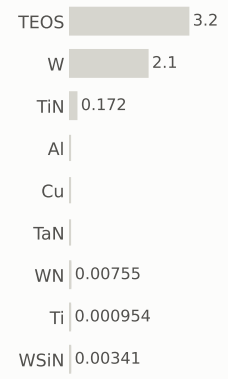

gases emitted (g)

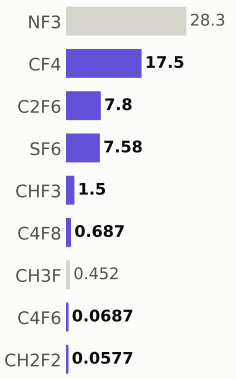

Step #25770: Deposition

depo_isotropic · Deposition

0.656	2,840.1	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.045 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

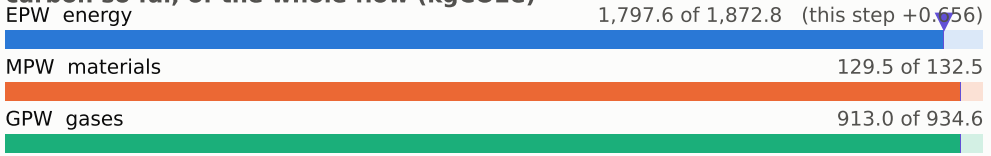

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

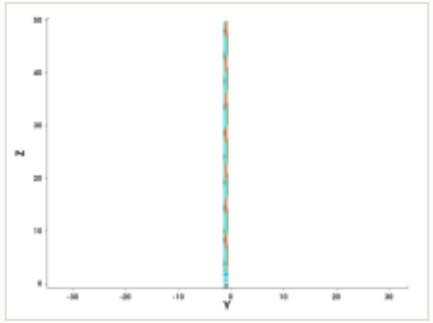

y cut at -1.035 µm

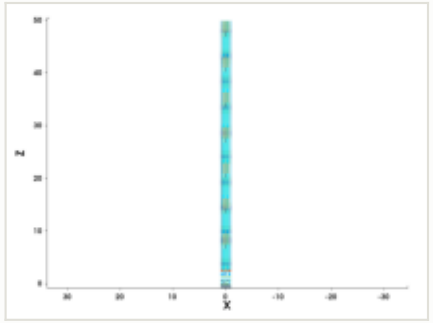

mask for this step

no mask for this step

steps by process area

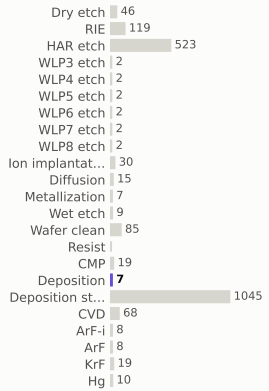

materials deposited (g)

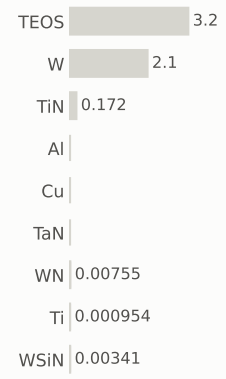

gases emitted (g)

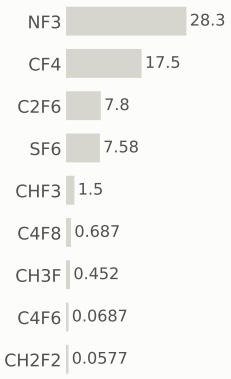

Step #25780: RIE

etch_multi_offset · RIE

1.04	2,841.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

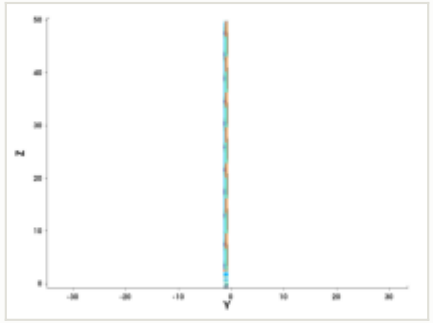

y cut at -1.035 µm

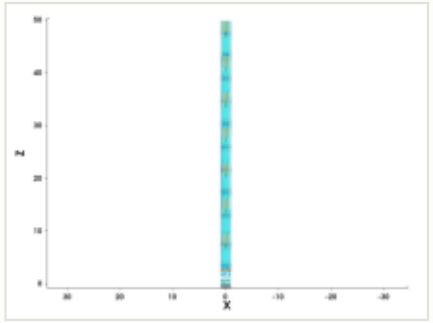

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

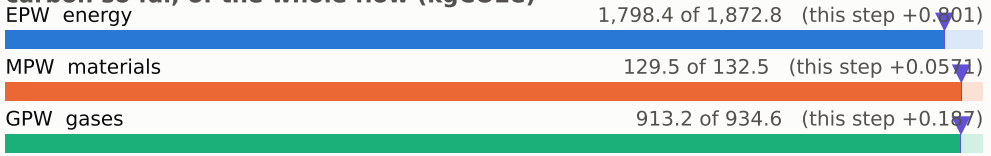

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

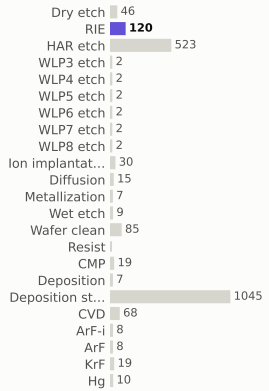

materials deposited (g)

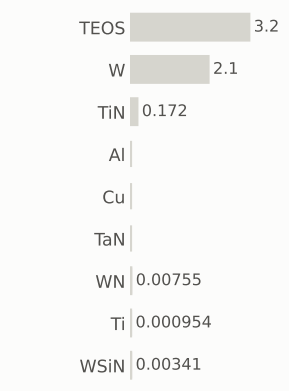

gases emitted (g)

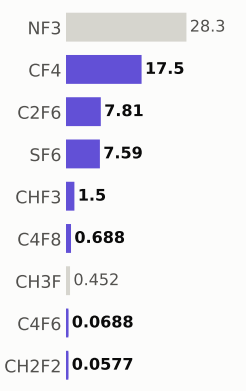

Step #25790: RIE

etch_isotropic · RIE

1.04	2,842.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

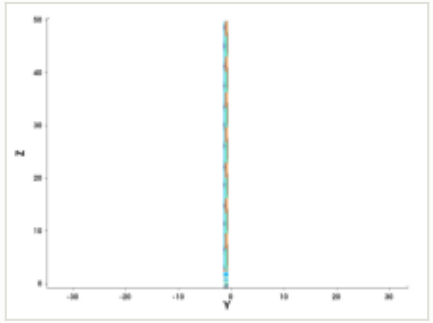

y cut at -1.035 µm

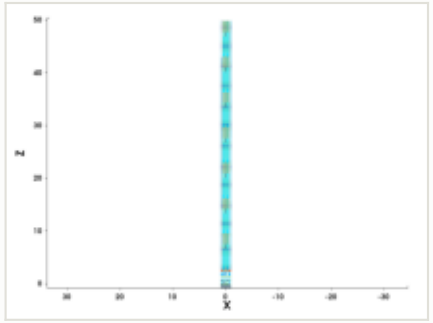

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

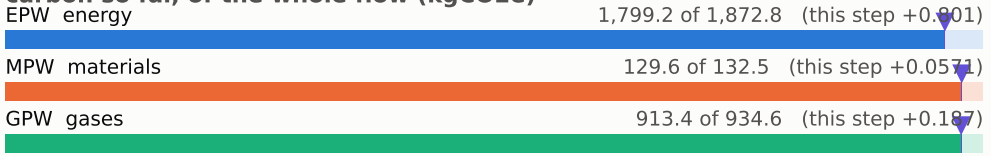

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

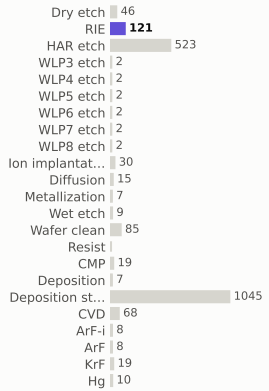

materials deposited (g)



gases emitted (g)

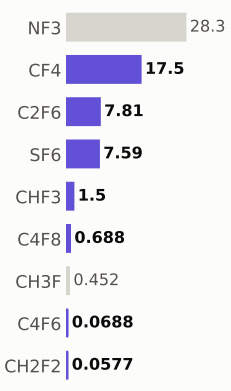

Step #25800: RIE

etch_anisotropic · RIE

1.04	2,843.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

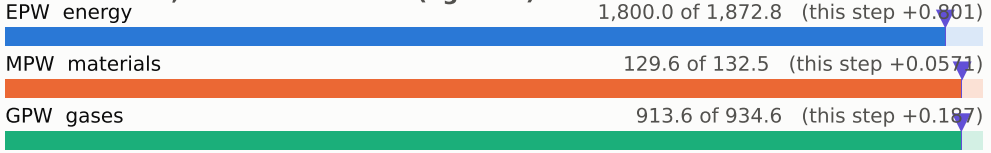

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

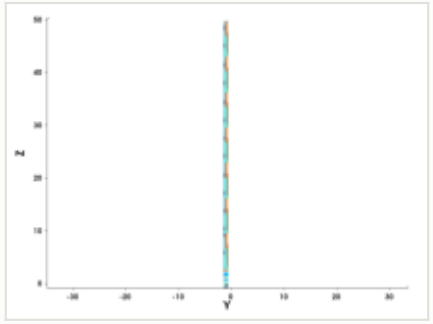

y cut at -1.035 µm

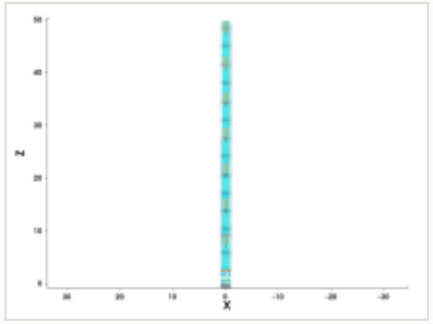

mask for this step

no mask for this step

steps by process area

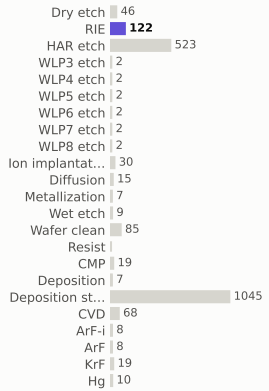

materials deposited (g)

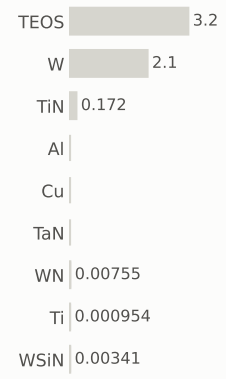

gases emitted (g)

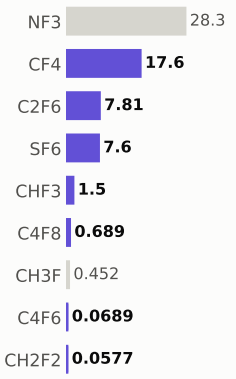

Step #25810: RIE

etch_anisotropic · RIE

1.04	2,844.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

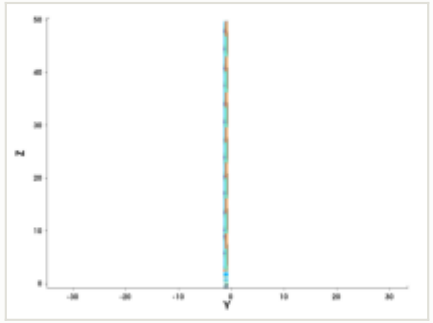

y cut at -1.035 µm

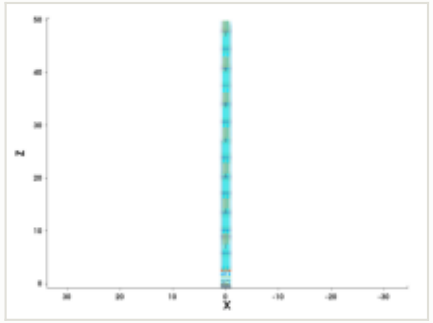

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

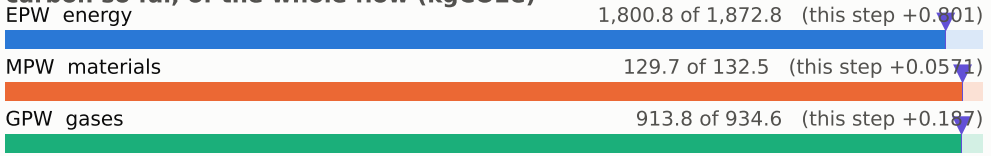

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

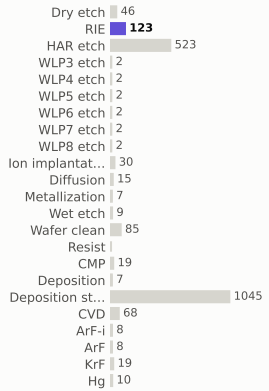

materials deposited (g)



gases emitted (g)

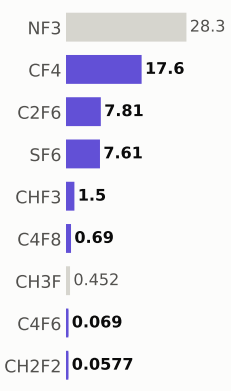

Step #25820: RIE

etch_anisotropic · RIE

1.04	2,845.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

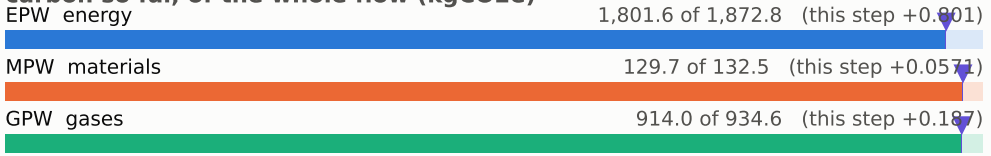

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

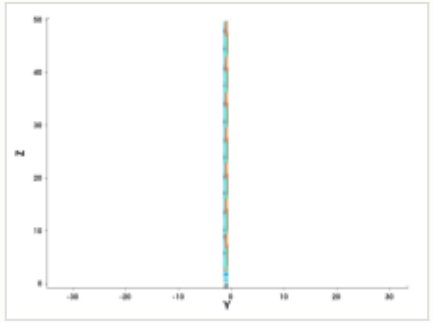

y cut at -1.035 µm

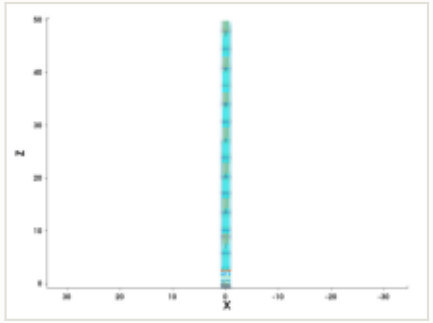

mask for this step

no mask for this step

steps by process area

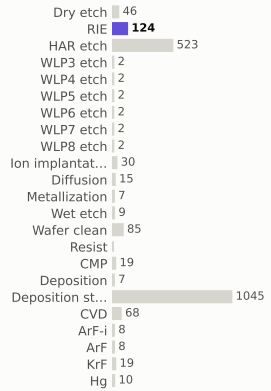

materials deposited (g)



gases emitted (g)

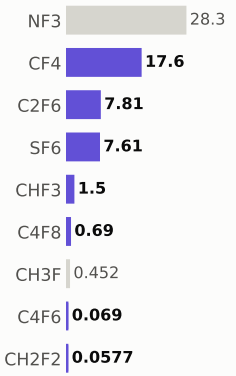

Step #25830: CVD

depo_isotropic · CVD

1.31	2,846.7	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.14 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

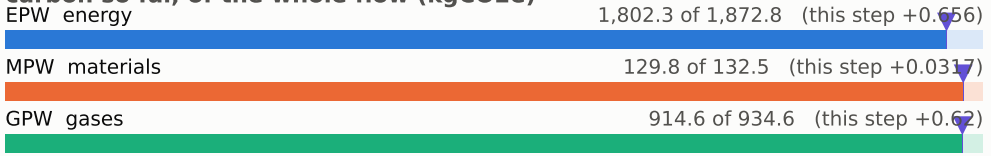

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

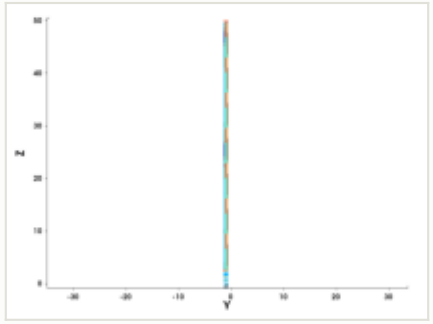

y cut at -1.035 µm

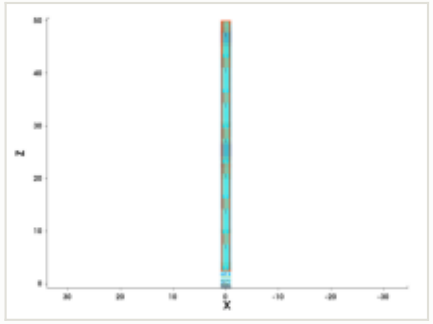

mask for this step

no mask for this step

steps by process area

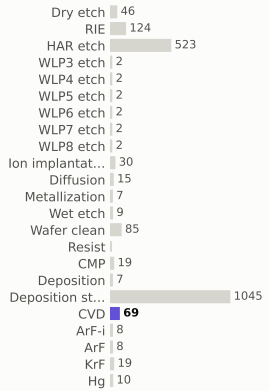

materials deposited (g)



gases emitted (g)



Step #25840: CMP

etch_cmp · CMP

0.169	2,846.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

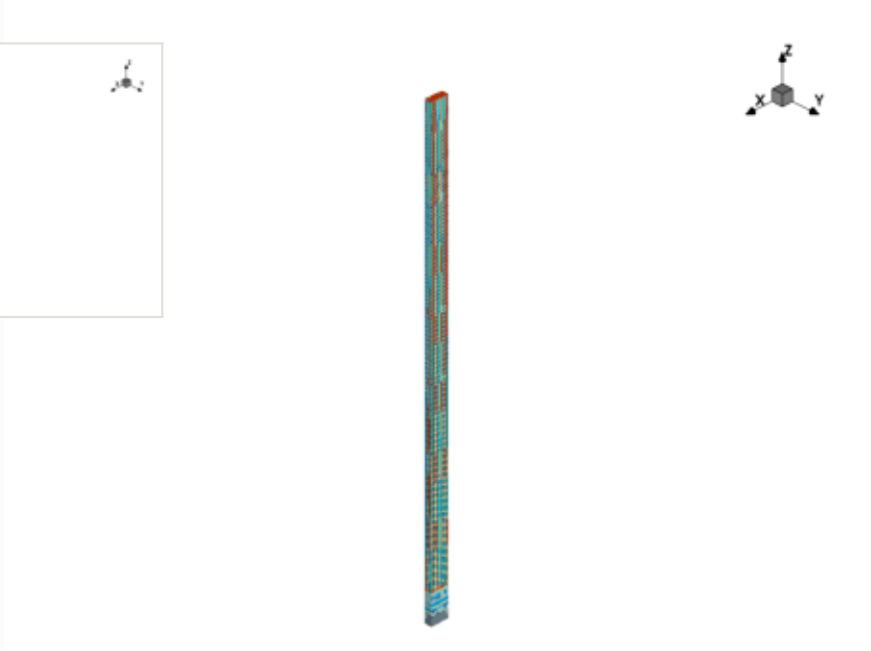

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

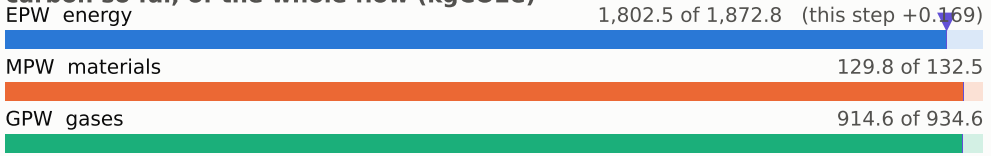

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

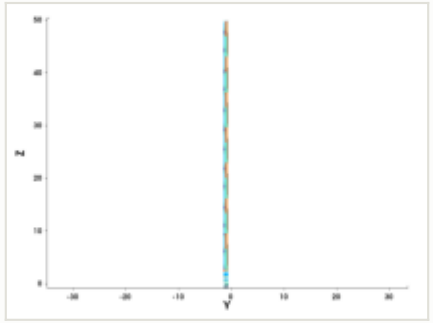

y cut at -1.035 µm

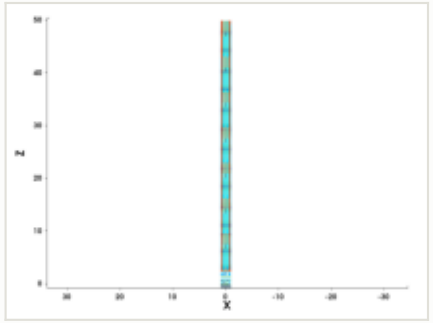

mask for this step

no mask for this step

steps by process area

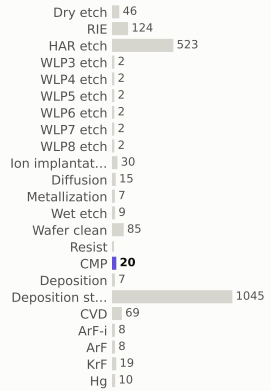

materials deposited (g)

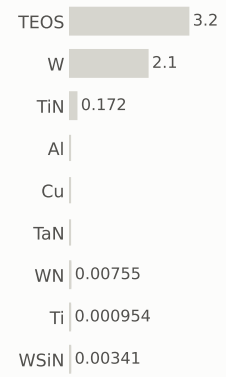

gases emitted (g)

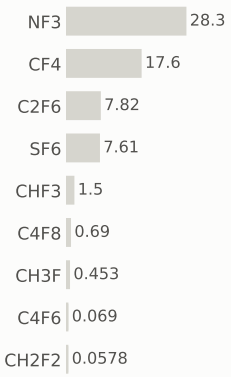

Step #25850: Wafer_clean

clean · Wafer_clean

0.169	2,847.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

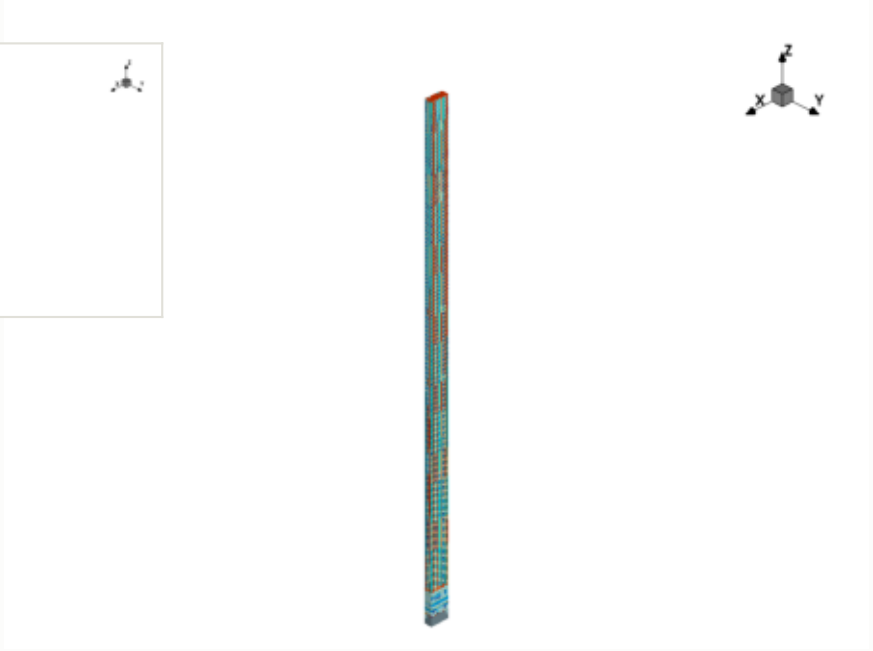

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

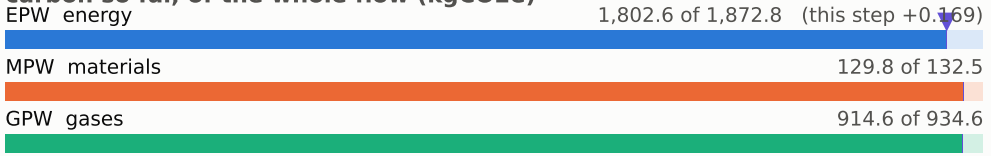

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

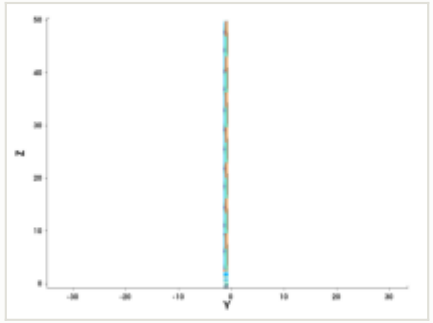

y cut at -1.035 µm

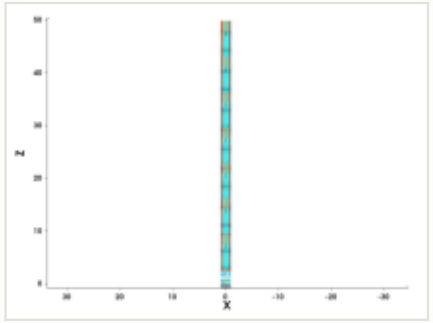

mask for this step

no mask for this step

steps by process area

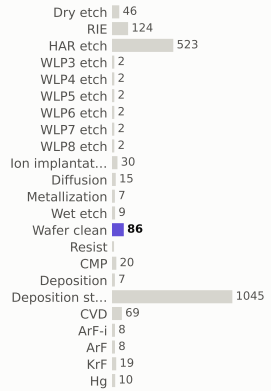

materials deposited (g)

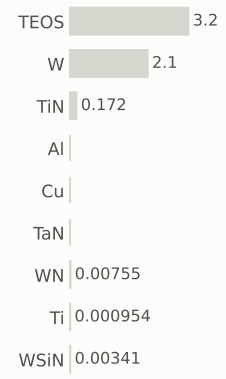

gases emitted (g)

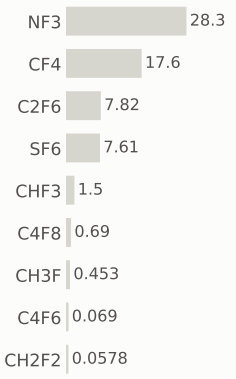

Step #25870: KrF

litho_patterning · KrF

0.199	2,847.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

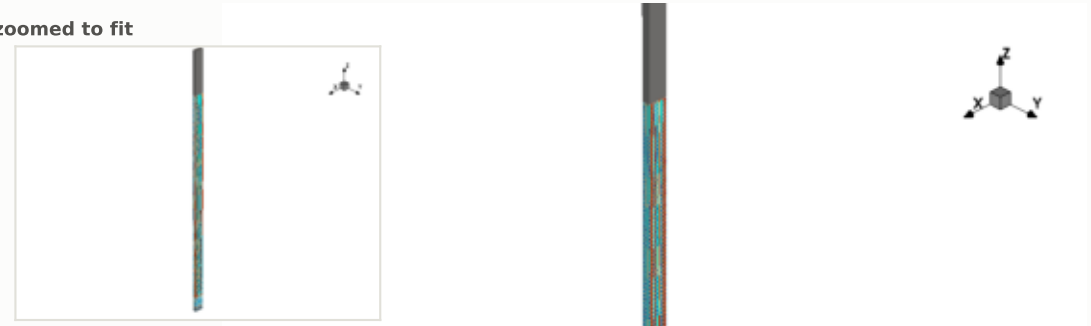

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

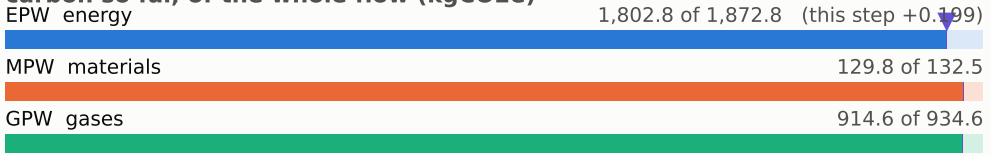

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

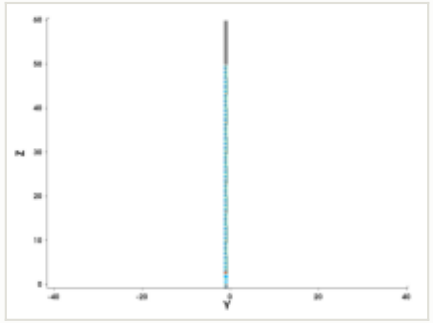

y cut at -1.035 µm

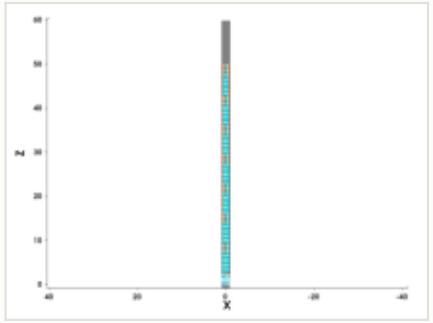

mask: layer 39:0 (OASIS)

nothing in the clip window

steps by process area

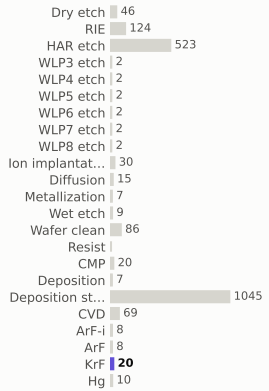

materials deposited (g)

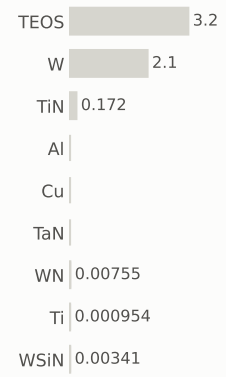

gases emitted (g)

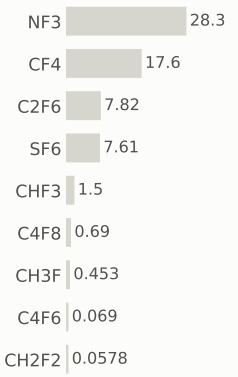

Step #25880: RIE

etch_anisotropic · RIE

1.04	2,848.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

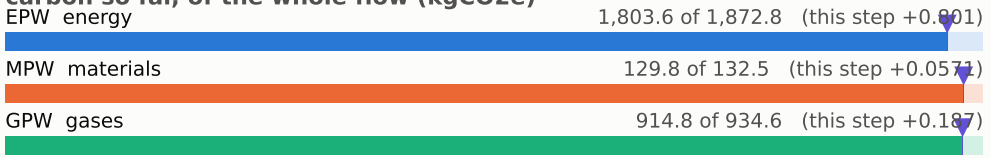

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

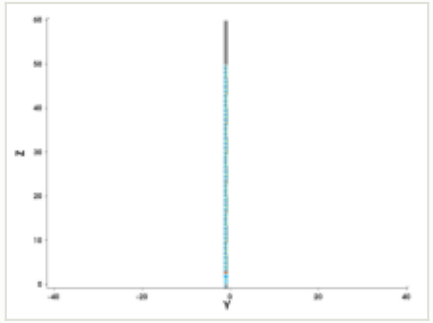

y cut at -1.035 µm

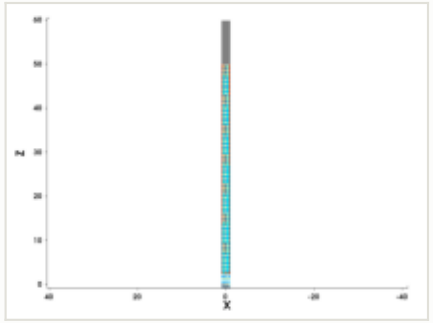

mask for this step

no mask for this step

steps by process area

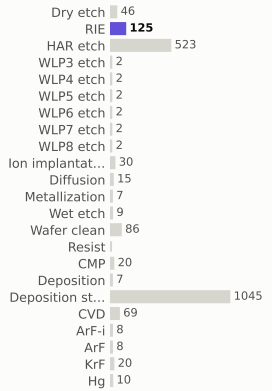

materials deposited (g)

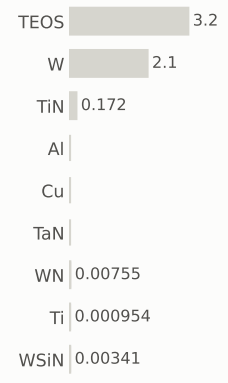

gases emitted (g)

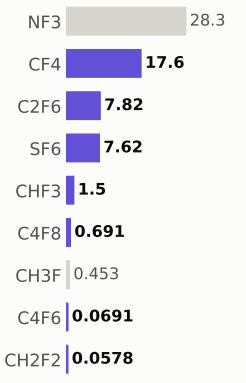

Step #25890: Dry_etch

etch_strip · Dry_etch

0.801	2,849.0	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

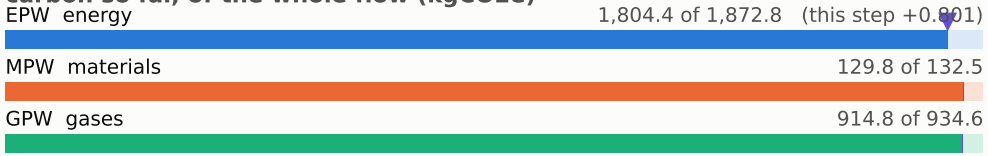

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

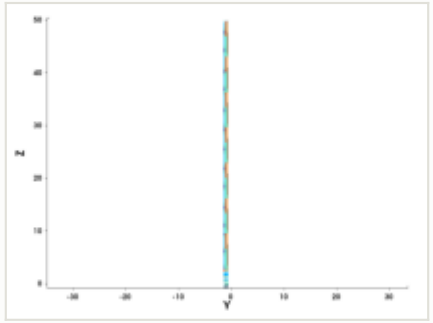

y cut at -1.035 µm

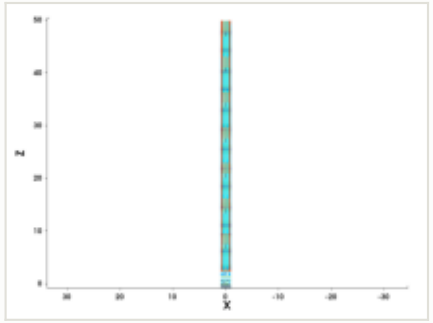

mask for this step

no mask for this step

steps by process area

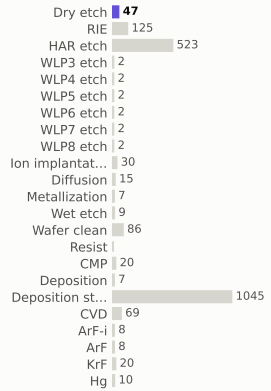

materials deposited (g)

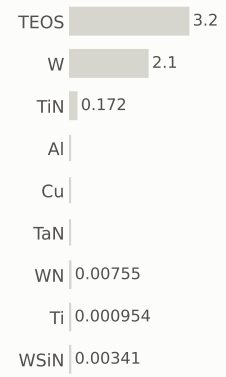

gases emitted (g)

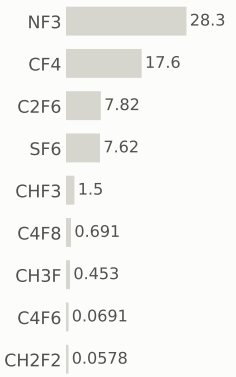

Step #25900: Wafer_clean

clean · Wafer_clean

0.169	2,849.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

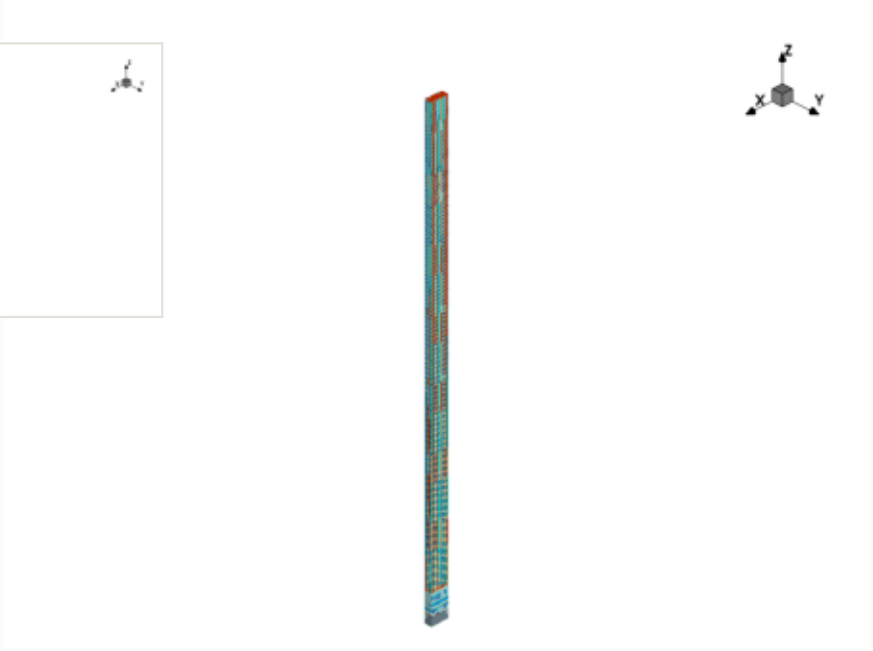

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

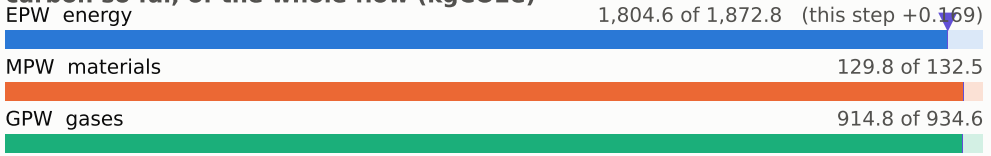

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

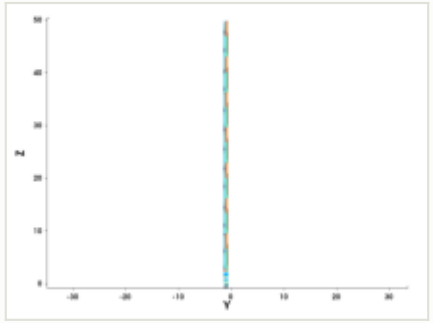

y cut at -1.035 µm

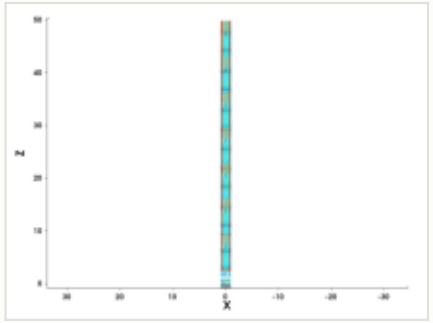

mask for this step

no mask for this step

steps by process area

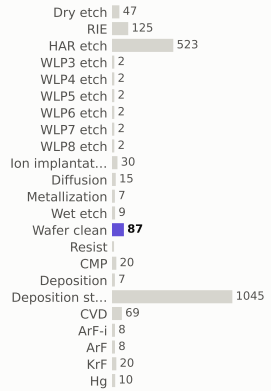

materials deposited (g)

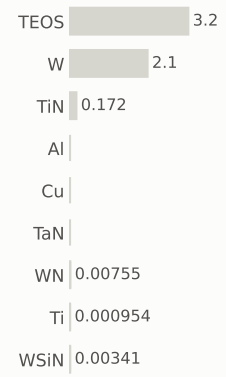

gases emitted (g)

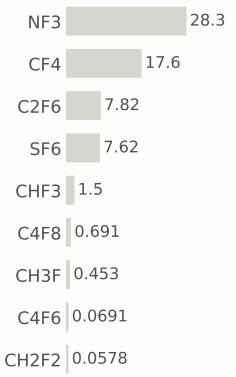

Step #25910: Deposition

depo_isotropic · Deposition

0.656	2,849.9	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

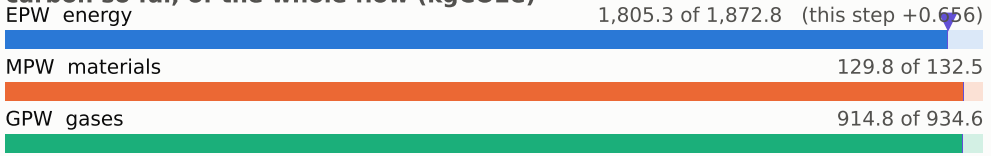

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

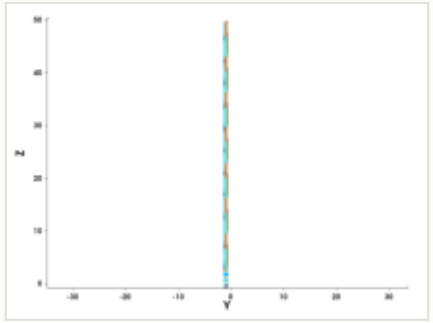

y cut at -1.035 µm

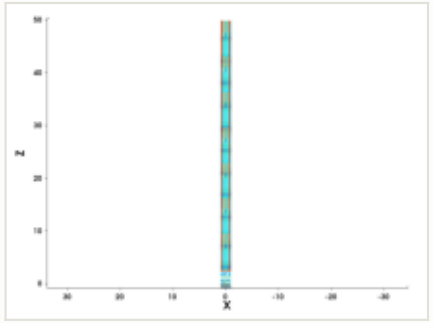

mask for this step

no mask for this step

steps by process area

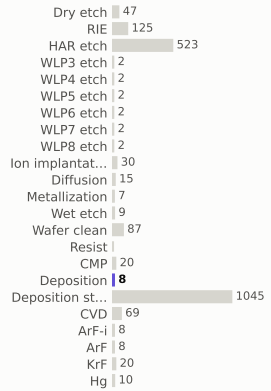

materials deposited (g)

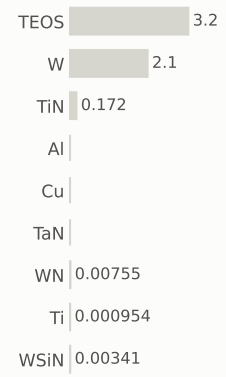

gases emitted (g)

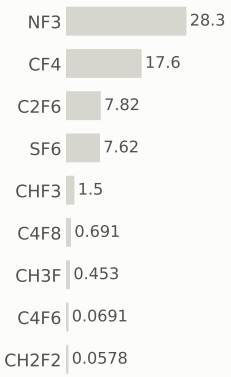

Step #25920: RIE

etch_anisotropic · RIE

1.04	2,850.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

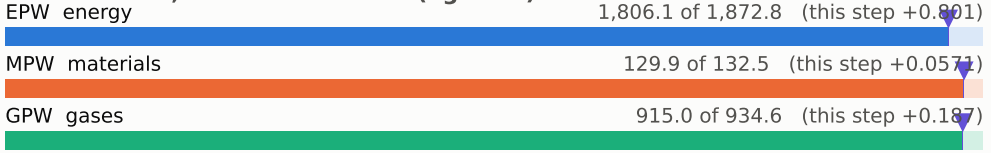

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

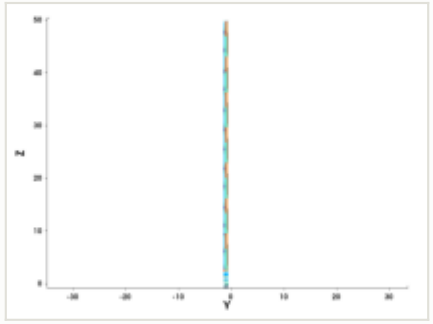

y cut at -1.035 µm

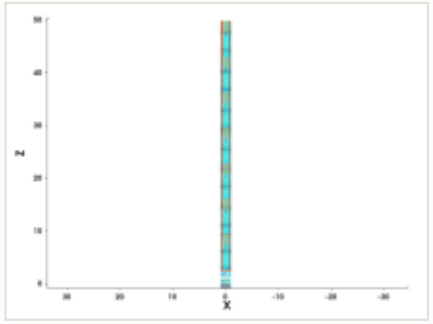

mask for this step

no mask for this step

steps by process area

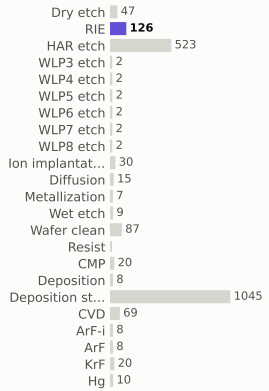

materials deposited (g)

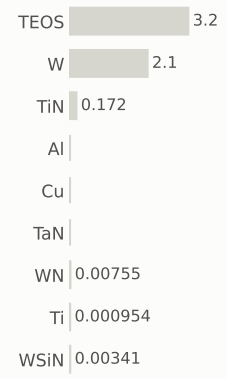

gases emitted (g)

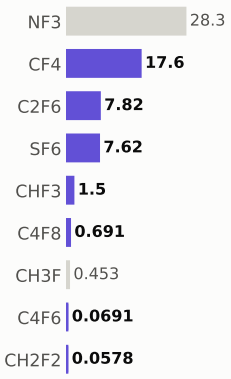

Step #25930: Deposition

depo_isotropic · Deposition

0.656	2,851.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000162 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

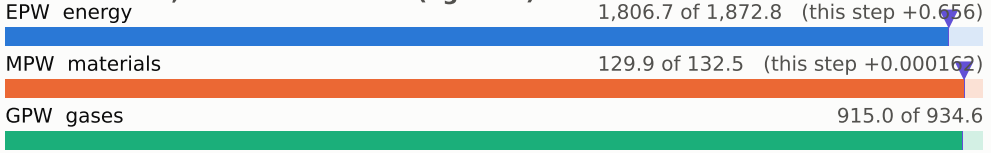

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

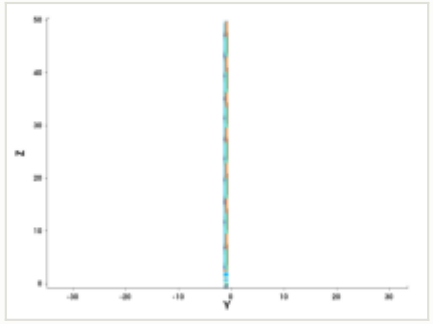

y cut at -1.035 µm

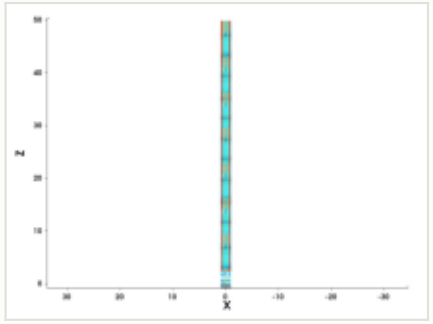

mask for this step

no mask for this step

steps by process area

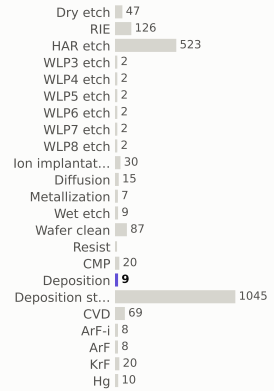

materials deposited (g)

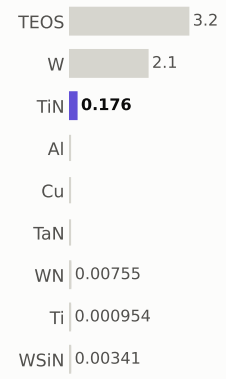

gases emitted (g)

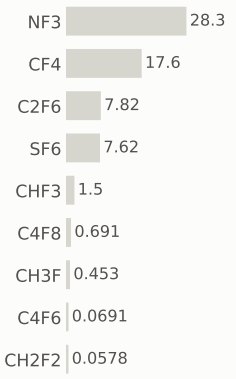

Step #25940: Metallization

depo_isotropic · Metallization

1.23	2,852.8	0.042%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

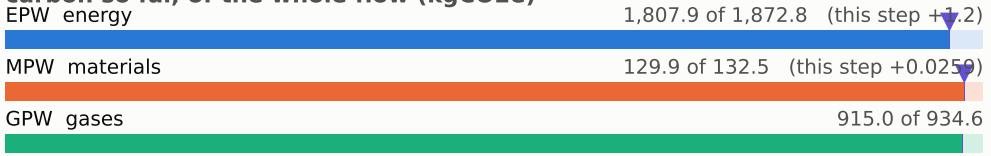

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

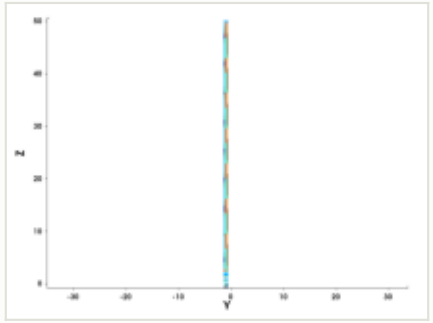

y cut at -1.035 µm

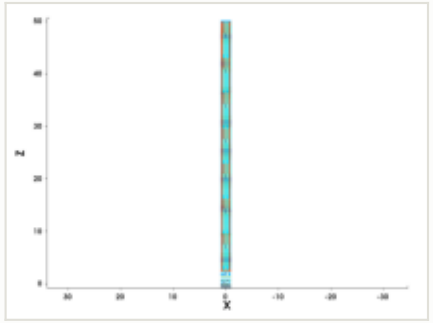

mask for this step

no mask for this step

steps by process area

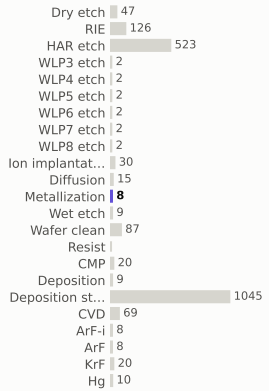

materials deposited (g)

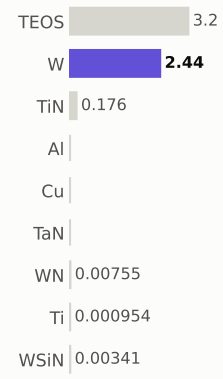

gases emitted (g)

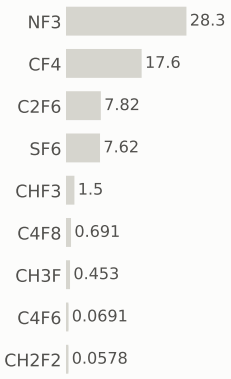

Step #25950: CMP

etch_cmp · CMP

0.169	2,853.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

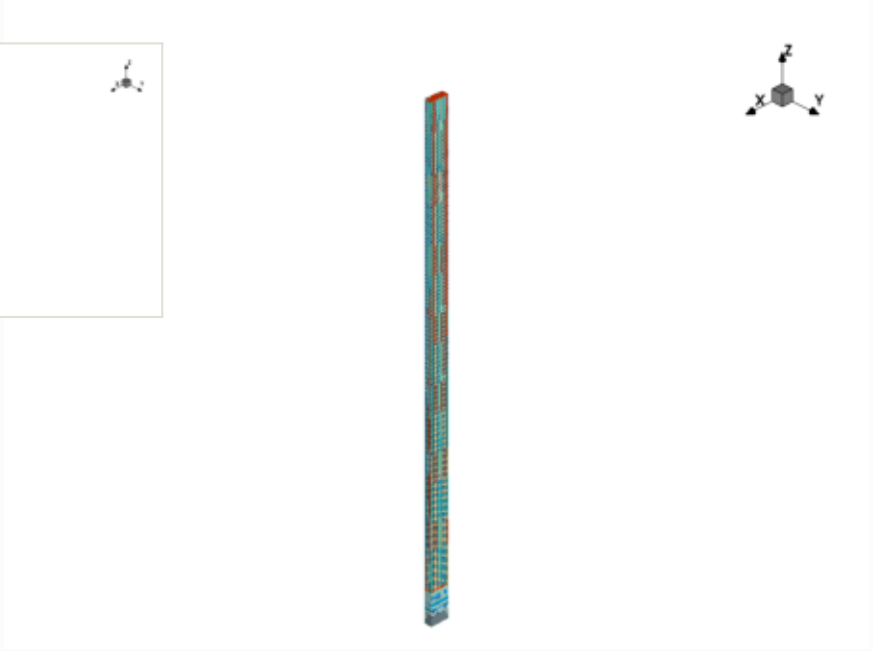

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

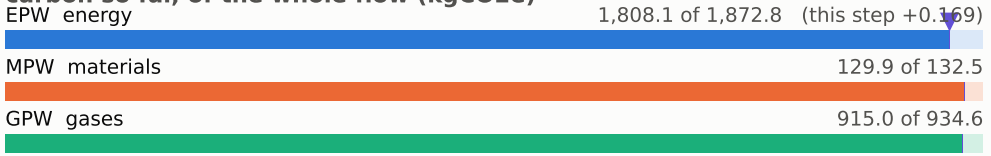

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

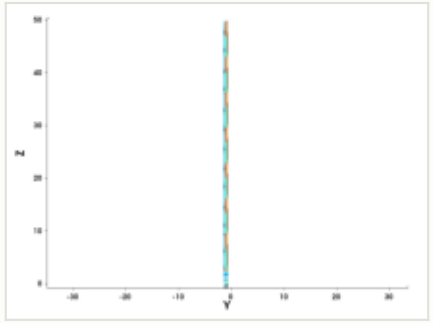

y cut at -1.035 µm

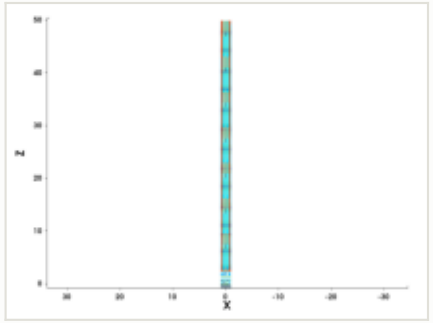

mask for this step

no mask for this step

steps by process area

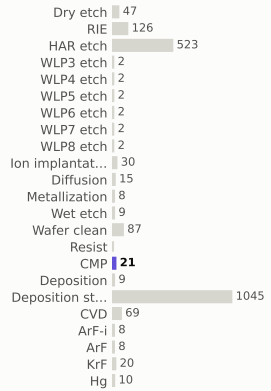

materials deposited (g)

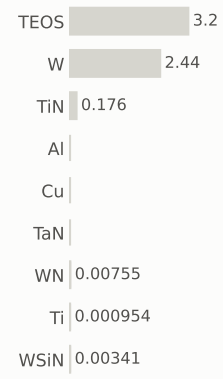

gases emitted (g)

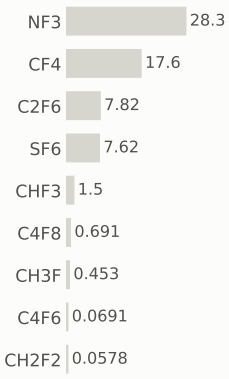

Step #25960: Wafer_clean

clean · Wafer_clean

0.169	2,853.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

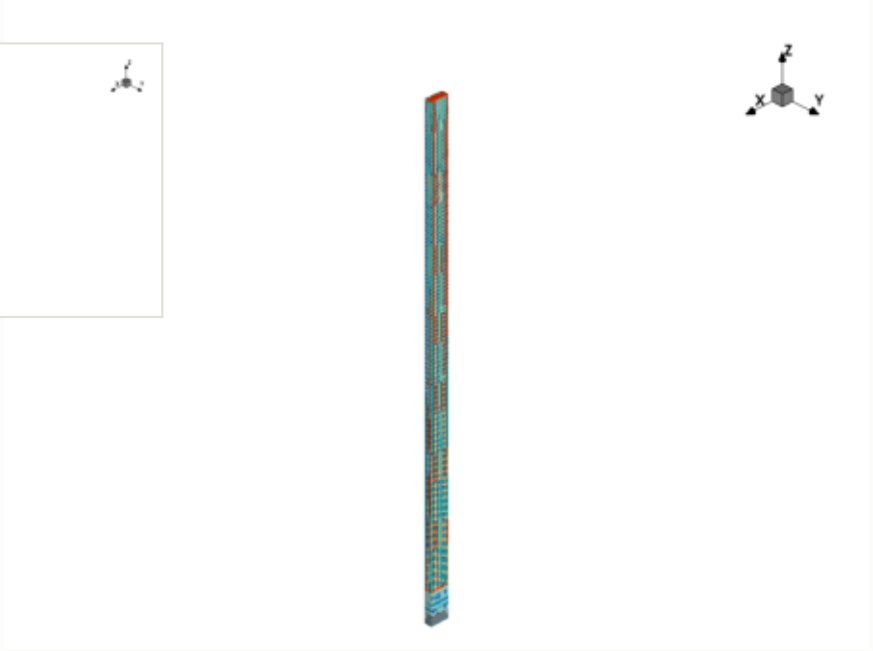

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

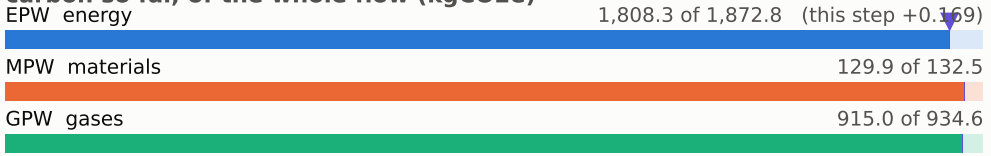

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

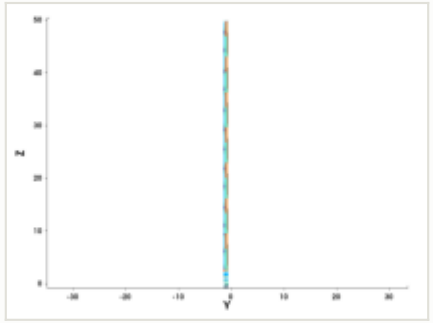

y cut at -1.035 µm

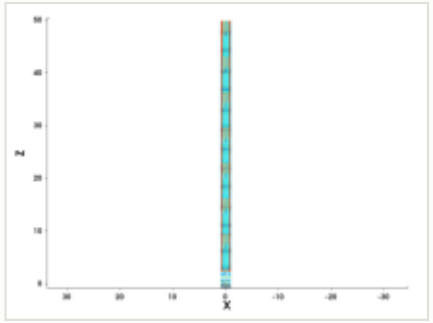

mask for this step

no mask for this step

steps by process area

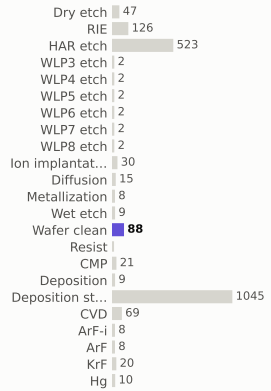

materials deposited (g)

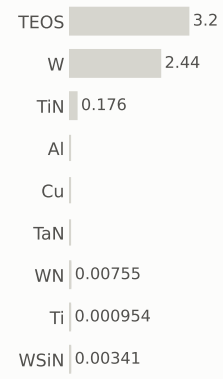

gases emitted (g)

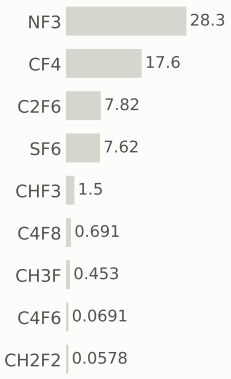

Step #25970: CVD

depo_isotropic · CVD

1.31	2,854.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.027 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

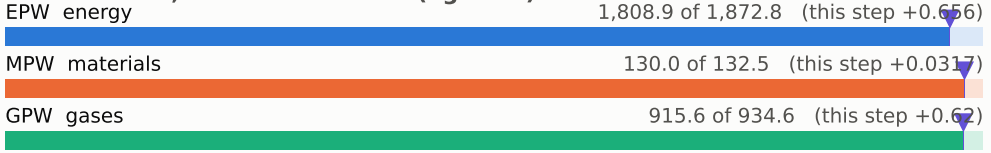

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

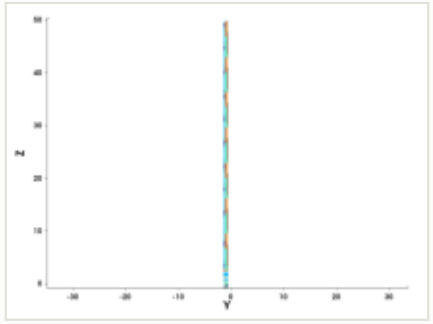

y cut at -1.035 µm

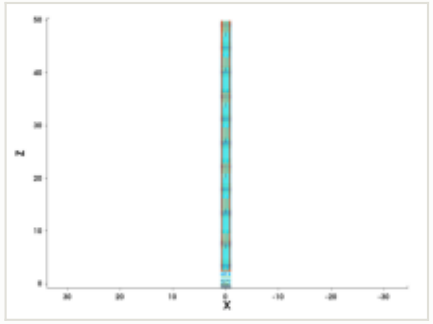

mask for this step

no mask for this step

steps by process area

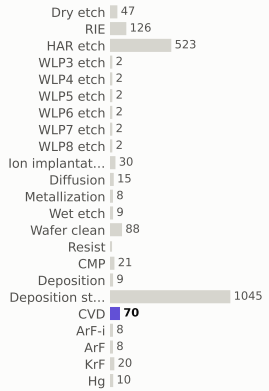

materials deposited (g)

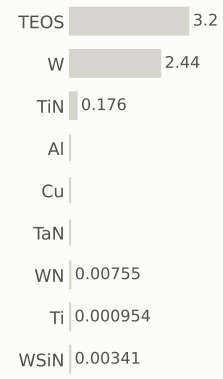

gases emitted (g)

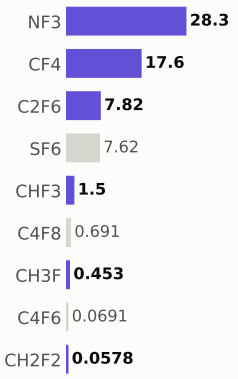

Step #25990: CVD

depo_isotropic · CVD

1.31	2,855.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

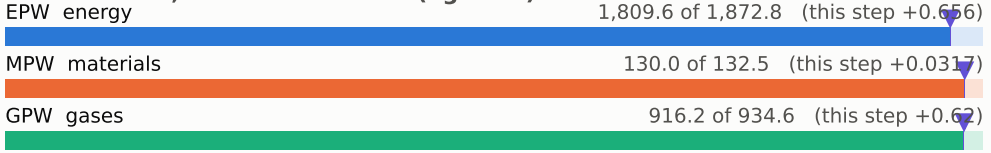

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

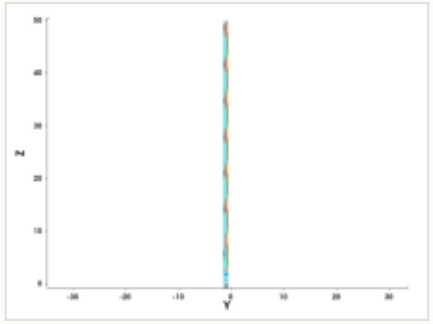

y cut at -1.035 µm

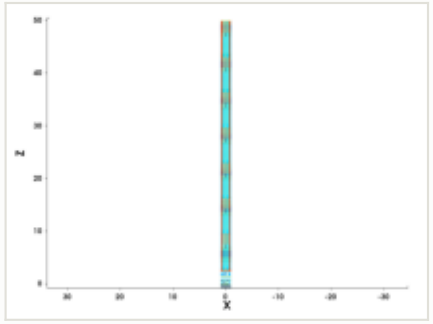

mask for this step

no mask for this step

steps by process area

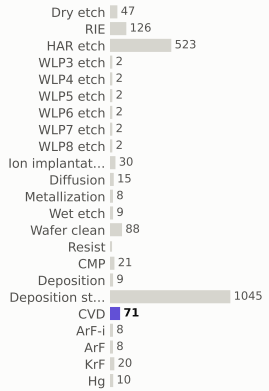

materials deposited (g)

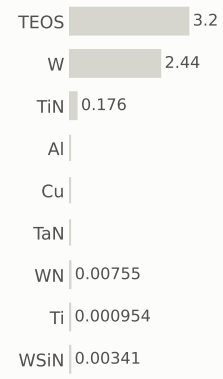

gases emitted (g)

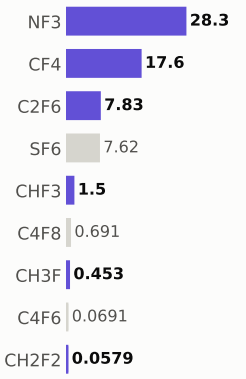

Step #26000: KrF

litho_patterning · KrF

0.199	2,856.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

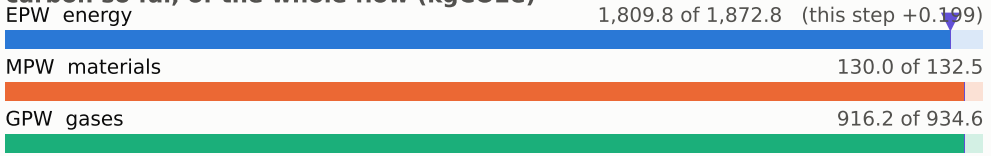

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

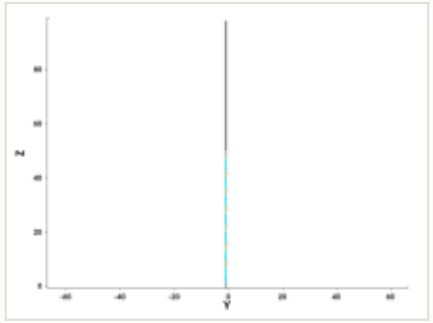

y cut at -1.035 µm

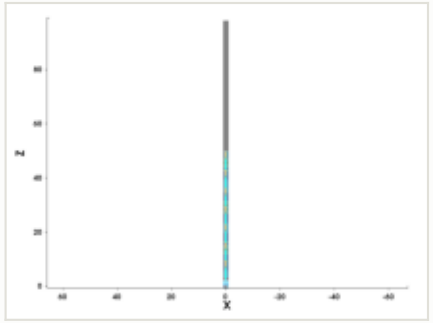

mask: layer 40:0, positive (OASIS)

steps by process area

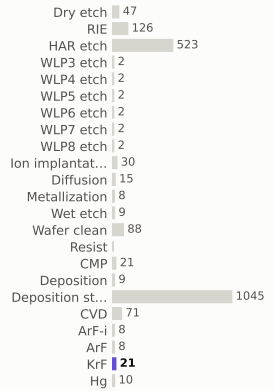

materials deposited (g)



gases emitted (g)

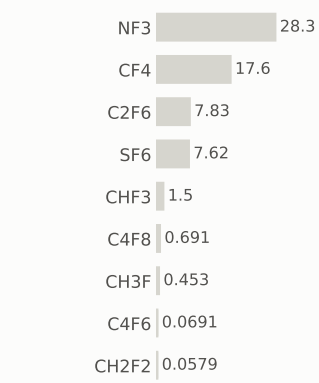

Step #26010: RIE

etch_anisotropic · RIE

1.04	2,857.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

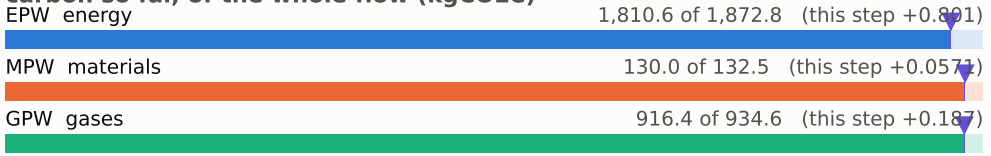

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

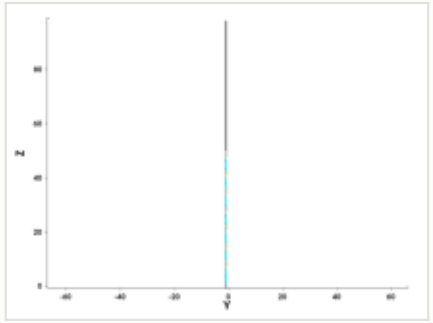

y cut at -1.035 µm

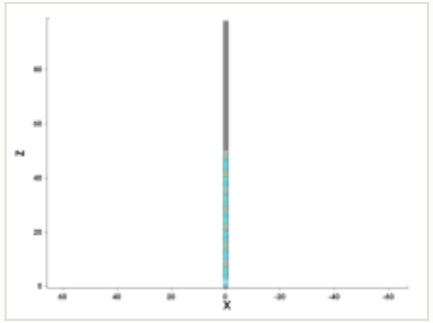

mask for this step

no mask for this step

steps by process area

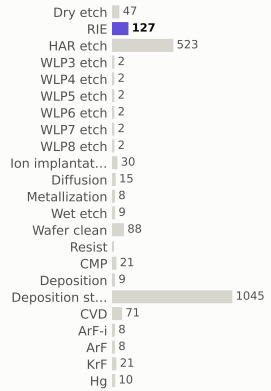

materials deposited (g)

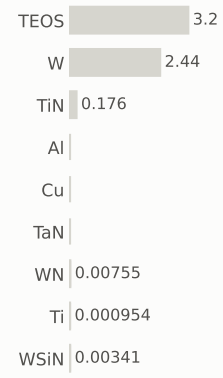

gases emitted (g)

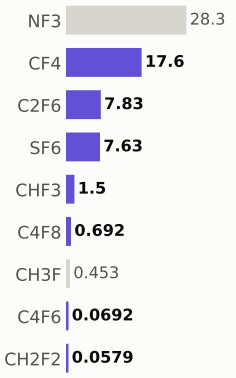

Step #26020: RIE

etch_anisotropic · RIE

1.04	2,858.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

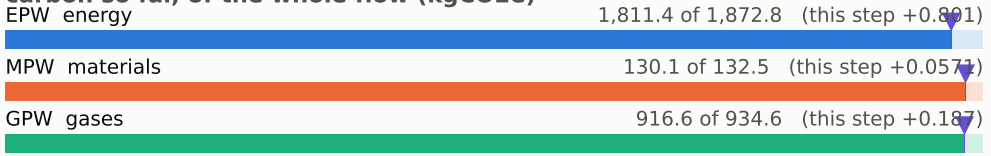

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

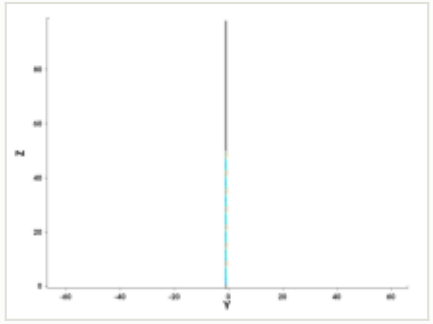

y cut at -1.035 µm

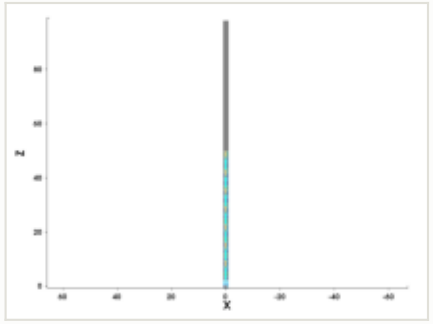

mask for this step

no mask for this step

steps by process area

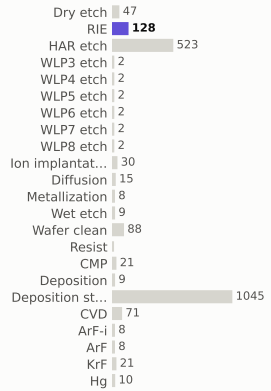

materials deposited (g)

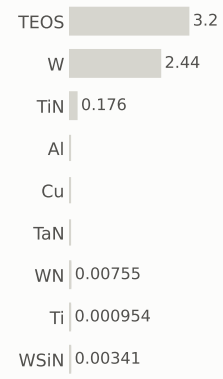

gases emitted (g)

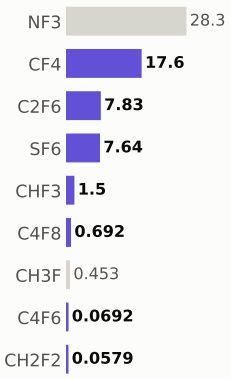

Step #26030: RIE

etch_anisotropic · RIE

1.04	2,859.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

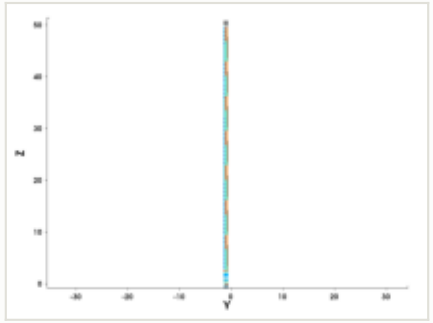

y cut at -1.035 µm

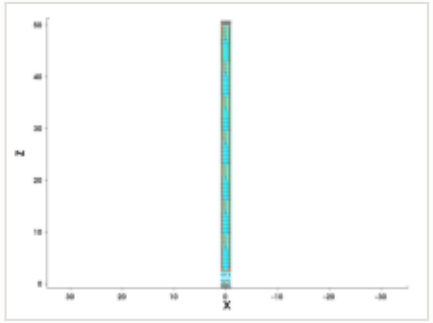

mask for this step

no mask for this step

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

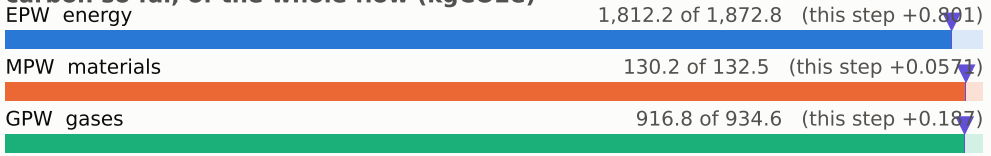

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

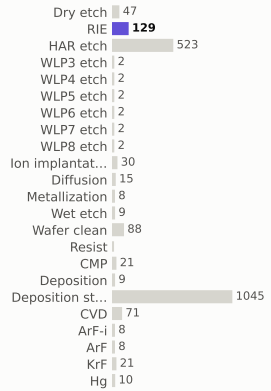

materials deposited (g)

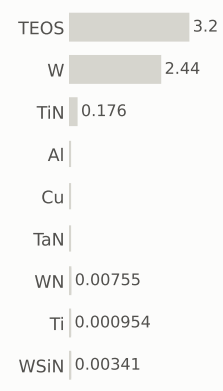

gases emitted (g)

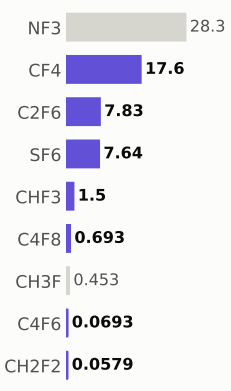

Step #26040: Dry_etch

etch_strip · Dry_etch

0.801	2,859.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

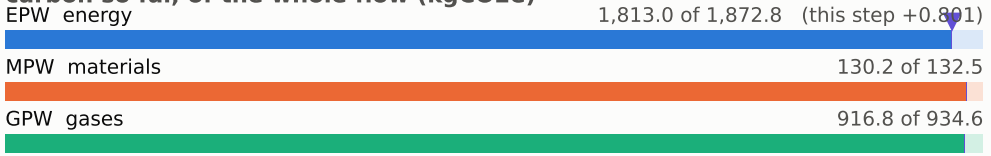

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

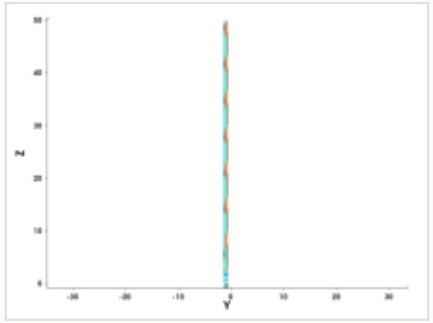

y cut at -1.035 µm

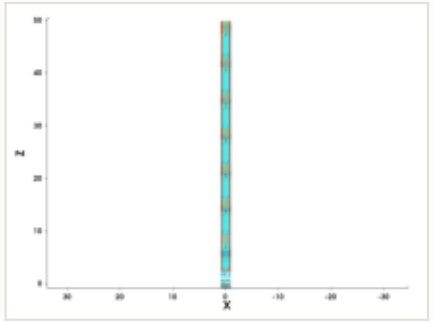

mask for this step

no mask for this step

steps by process area

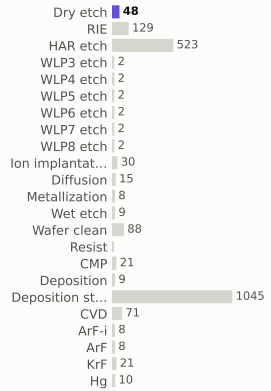

materials deposited (g)

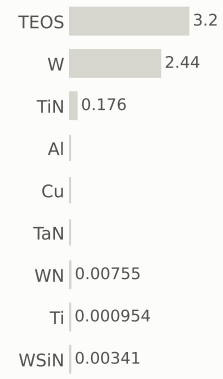

gases emitted (g)

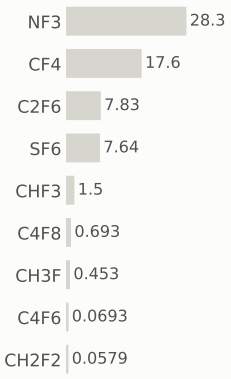

Step #26050: Wafer_clean

clean · Wafer_clean

0.169	2,860.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

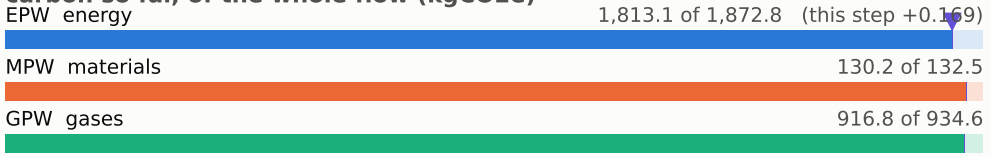

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

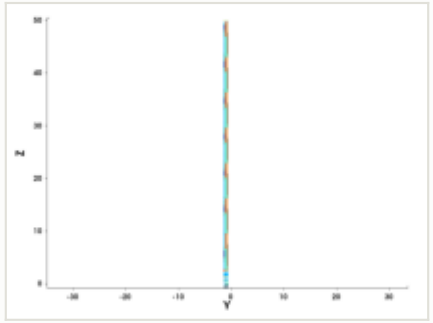

y cut at -1.035 µm

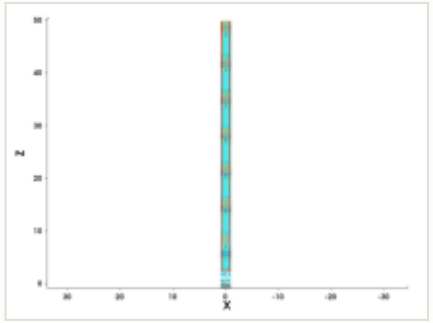

mask for this step

no mask for this step

steps by process area

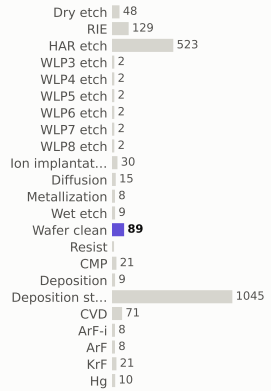

materials deposited (g)

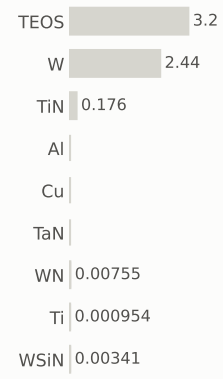

gases emitted (g)

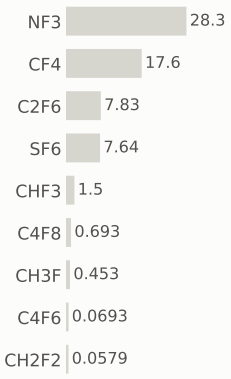

Step #26060: Deposition

depo_isotropic · Deposition

0.656	2,860.7	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000162 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

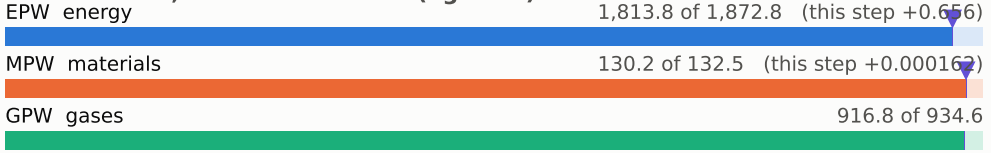

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

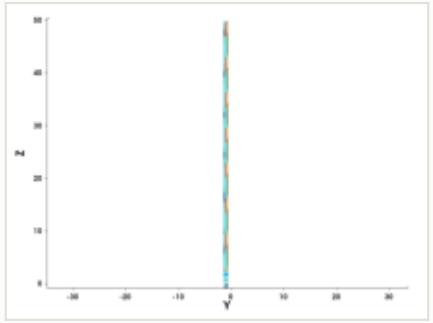

y cut at -1.035 µm

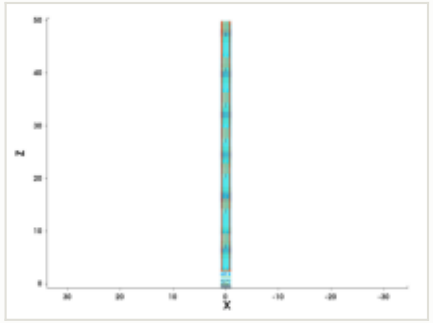

mask for this step

no mask for this step

steps by process area

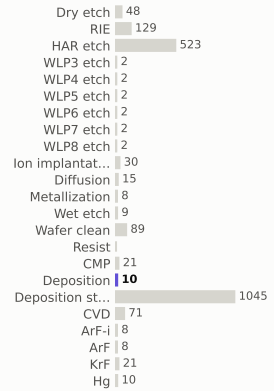

materials deposited (g)

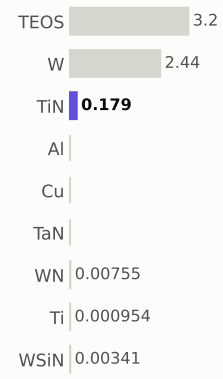

gases emitted (g)

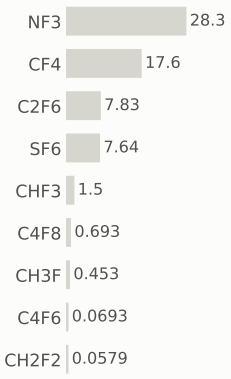

Step #26070: Metallization

depo_isotropic · Metallization

1.23	2,861.9	0.042%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

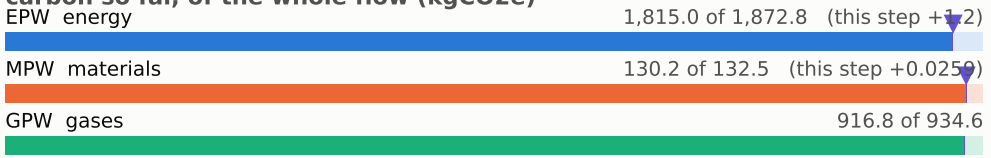

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

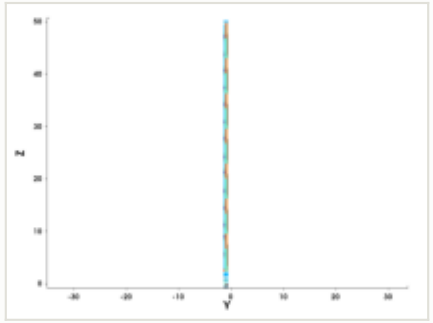

y cut at -1.035 µm

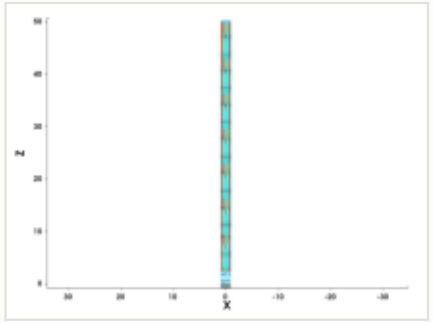

mask for this step

no mask for this step

steps by process area

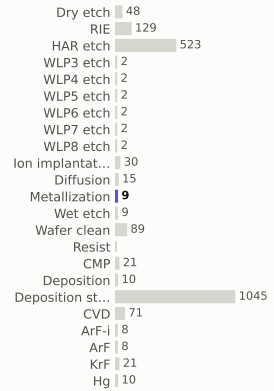

materials deposited (g)

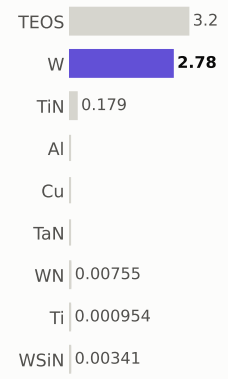

gases emitted (g)

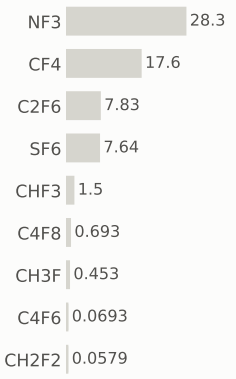

Step #26080: CMP

etch_cmp · CMP

0.169	2,862.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

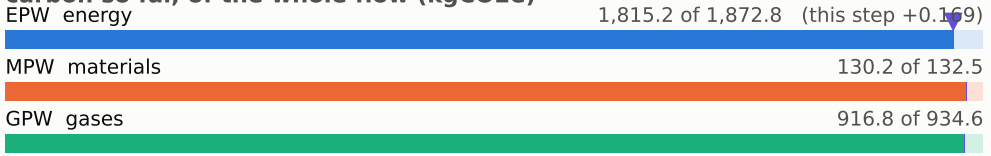

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

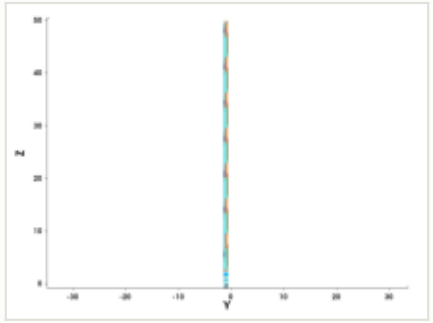

y cut at -1.035 µm

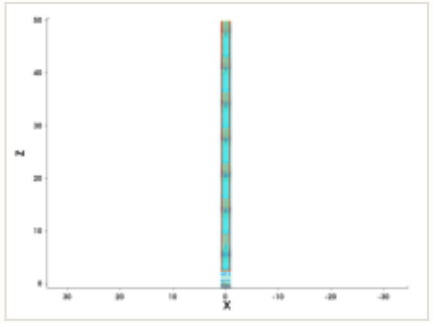

mask for this step

no mask for this step

steps by process area

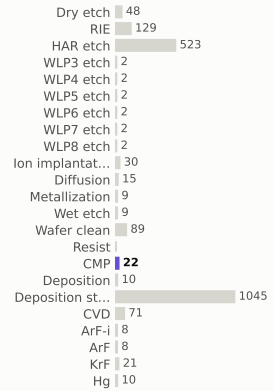

materials deposited (g)



gases emitted (g)

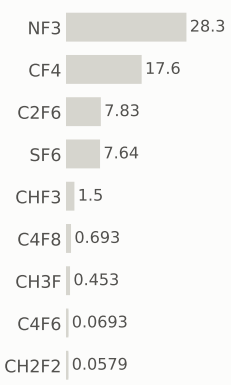

Step #26090: Wafer_clean

clean · Wafer_clean

0.169	2,862.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

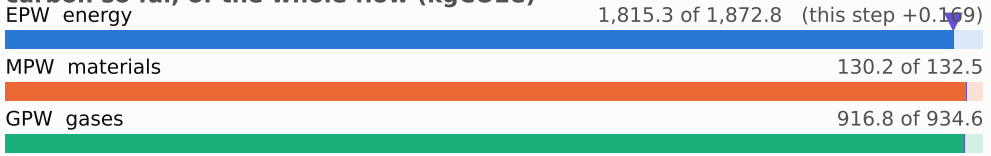

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

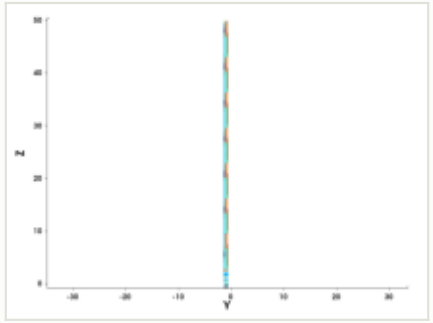

y cut at -1.035 µm

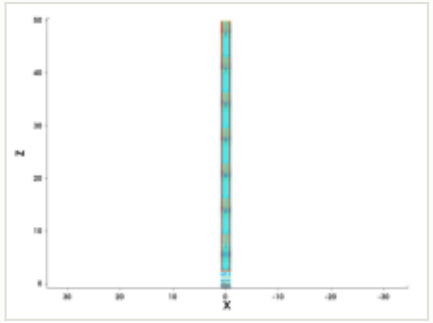

mask for this step

no mask for this step

steps by process area

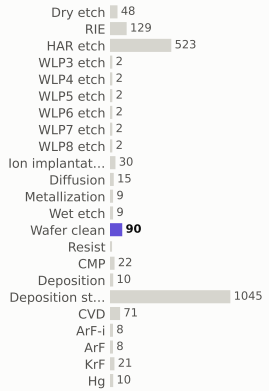

materials deposited (g)

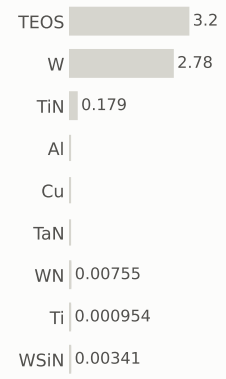

gases emitted (g)

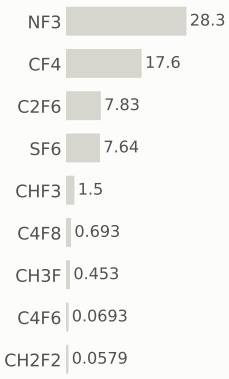

Step #26110: CVD

depo_isotropic · CVD

1.31	2,863.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

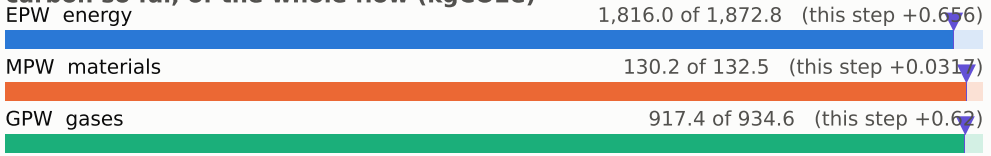

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

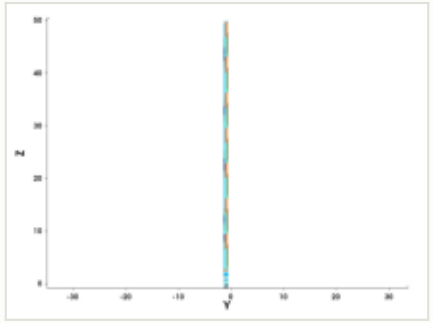

y cut at -1.035 µm

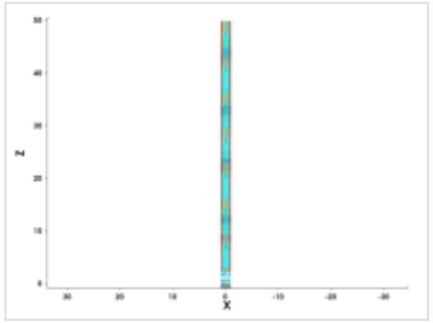

mask for this step

no mask for this step

steps by process area

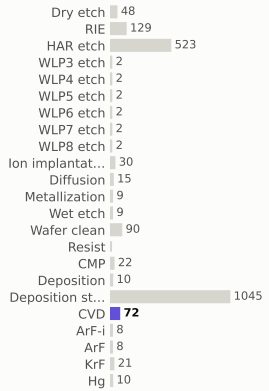

materials deposited (g)

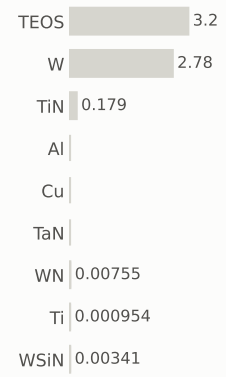

gases emitted (g)

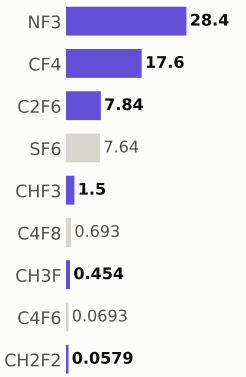

Step #26120: Wafer_clean

clean · Wafer_clean

0.169	2,863.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

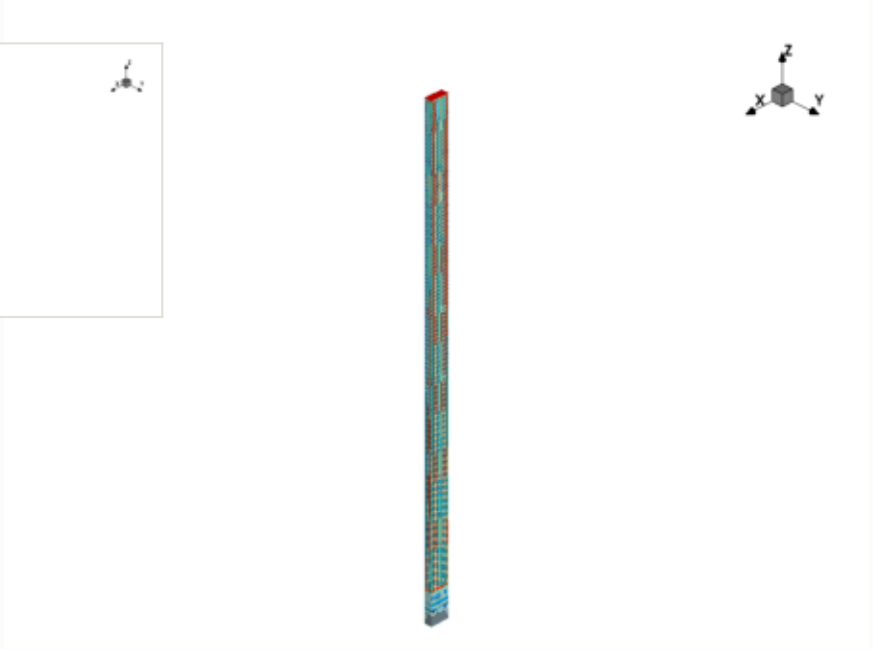

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

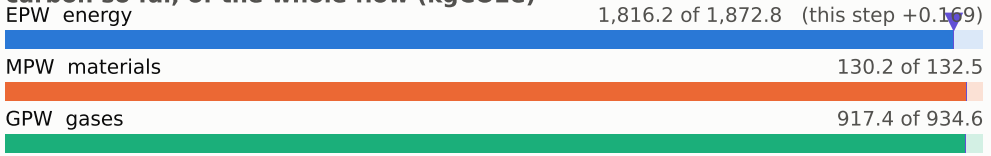

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

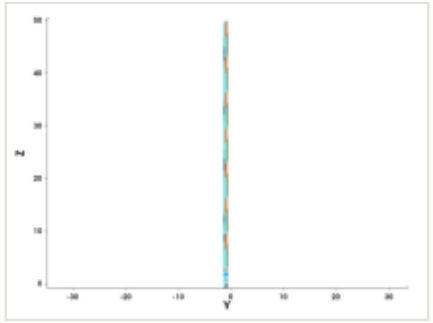

y cut at -1.035 µm

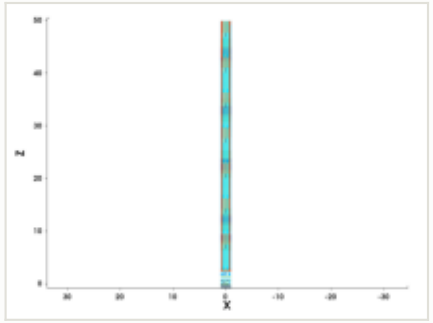

mask for this step

no mask for this step

steps by process area

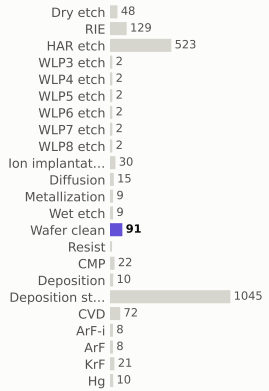

materials deposited (g)



gases emitted (g)

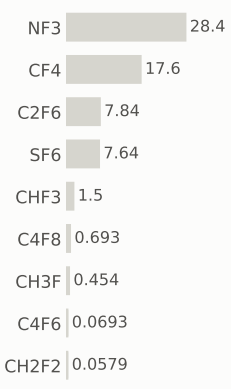

Step #26130: ArF-i

litho_patterning · ArF-i

0.217	2,864.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

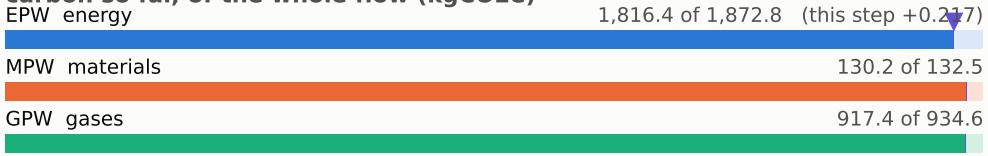

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

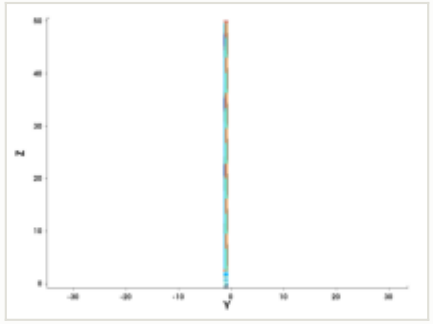

y cut at -1.035 µm

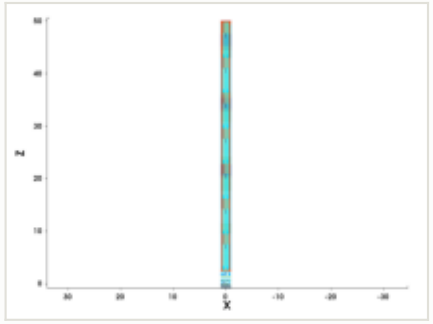

mask: layer 41:0 (OASIS)



steps by process area

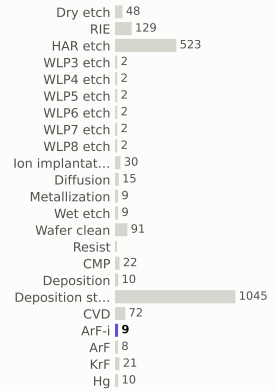

materials deposited (g)

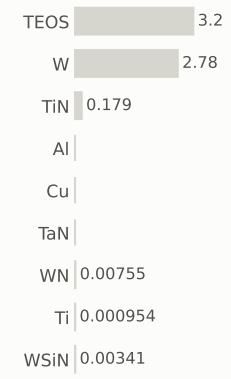

gases emitted (g)

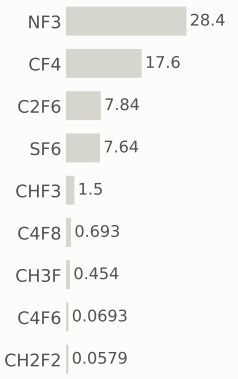

Step #26140: RIE

etch_anisotropic · RIE

1.04	2,865.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

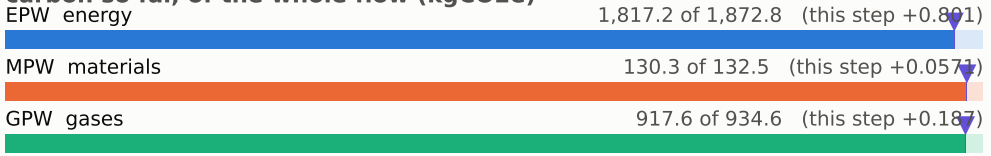

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

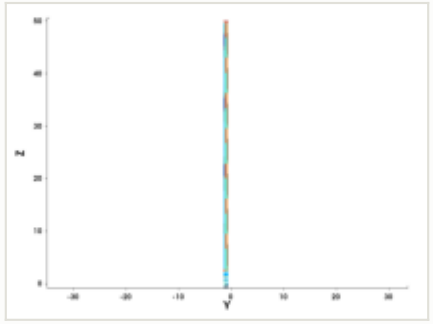

y cut at -1.035 µm

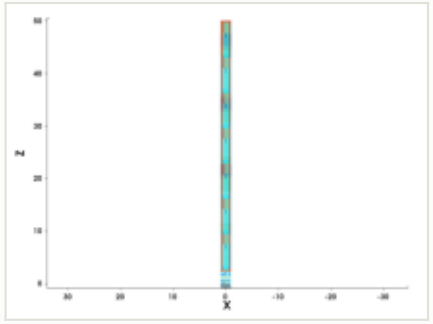

mask for this step

no mask for this step

steps by process area

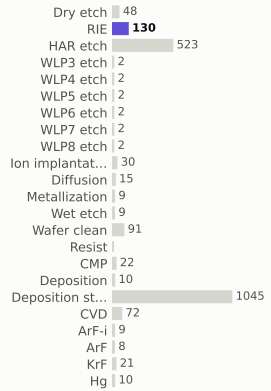

materials deposited (g)

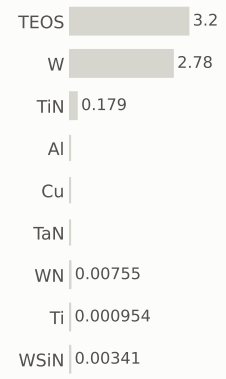

gases emitted (g)

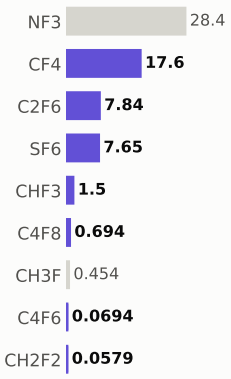

Step #26150: RIE

etch_anisotropic · RIE

1.04	2,866.1	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

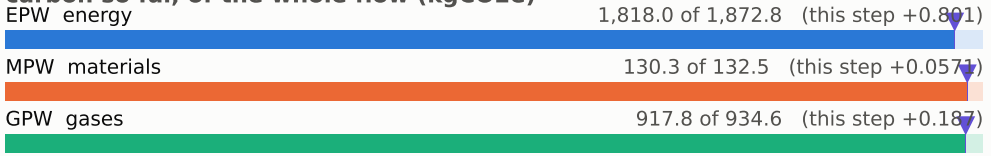

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

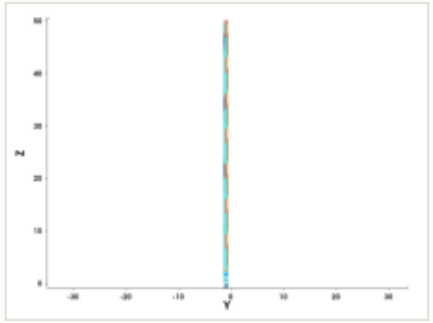

y cut at -1.035 µm

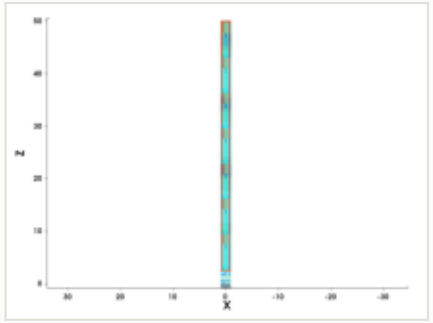

mask for this step

no mask for this step

steps by process area

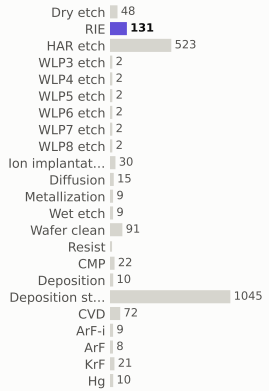

materials deposited (g)

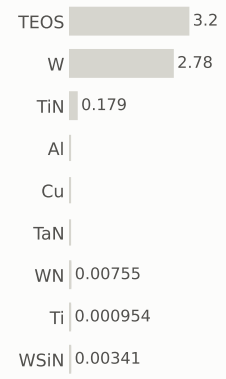

gases emitted (g)

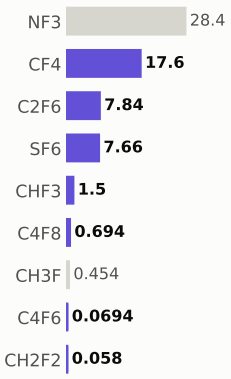

Step #26160: Dry_etch

etch_strip · Dry_etch

0.801	2,866.9	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

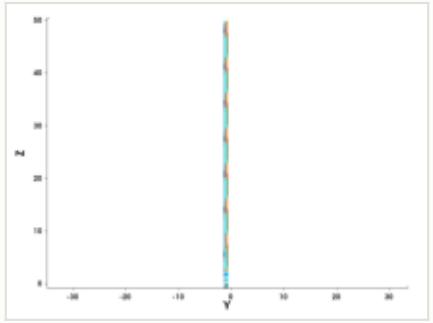

y cut at -1.035 µm

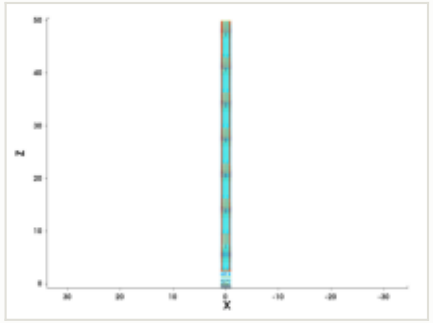

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

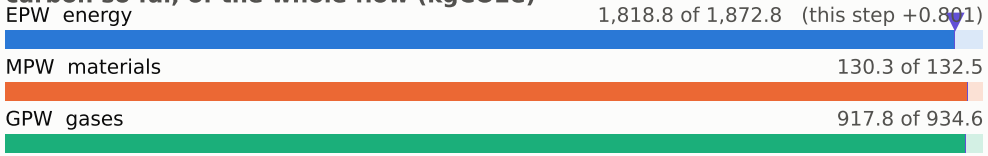

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

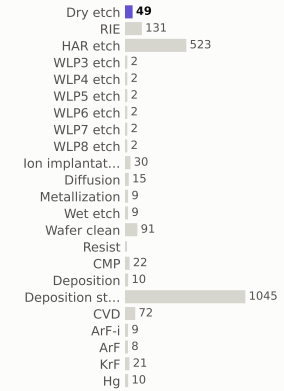

materials deposited (g)

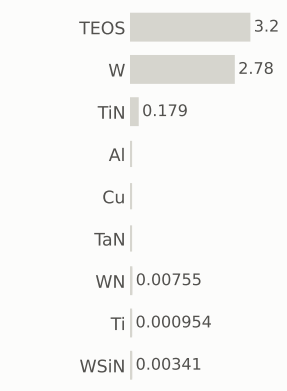

gases emitted (g)

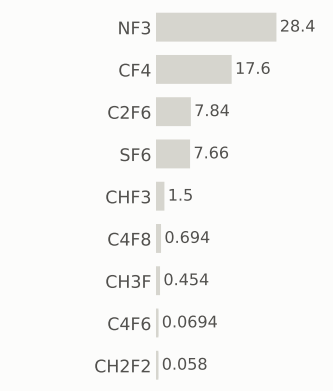

Step #26170: Wafer_clean

clean · Wafer_clean

0.169	2,867.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

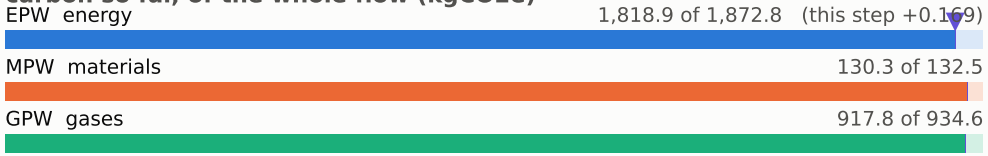

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

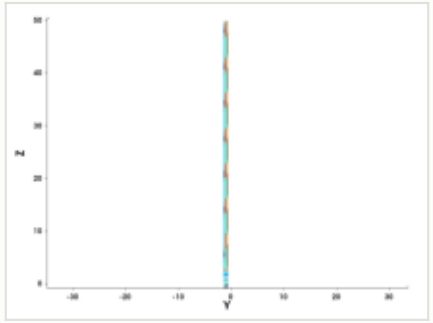

y cut at -1.035 µm

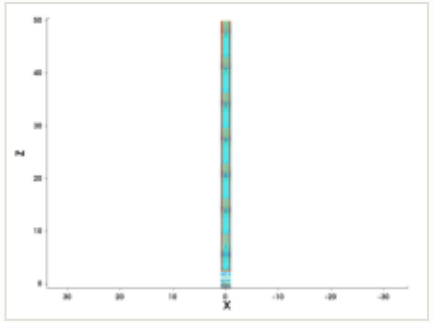

mask for this step

no mask for this step

steps by process area

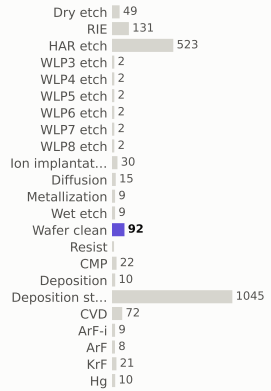

materials deposited (g)

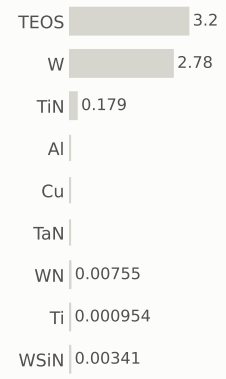

gases emitted (g)

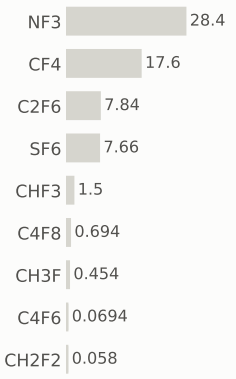

Step #26180: CVD

depo_ellipsoidal · CVD

1.31	2,868.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	TiN
thickness	0.009 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

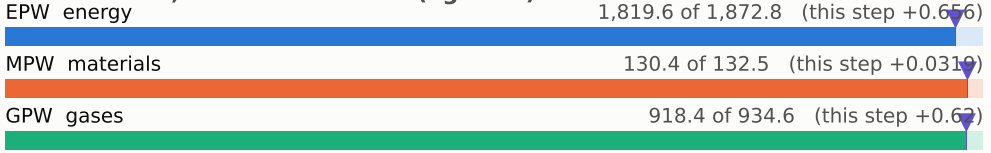

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

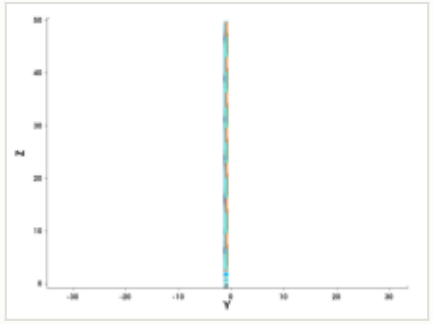

y cut at -1.035 µm

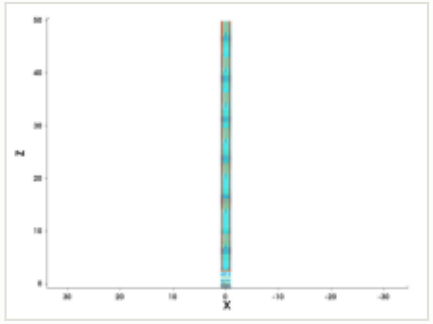

mask for this step

no mask for this step

steps by process area

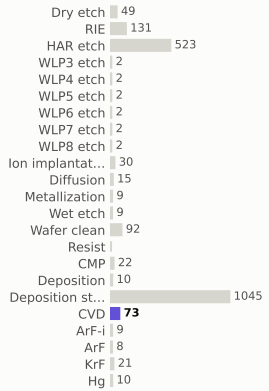

materials deposited (g)

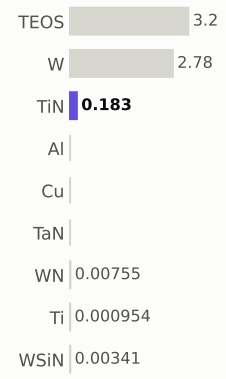

gases emitted (g)

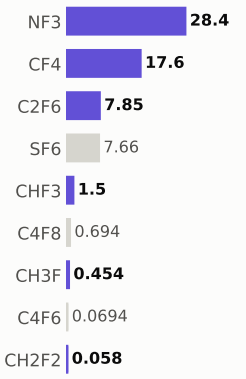

Step #26190: Metallization

depo_isotropic · Metallization

1.21	2,869.5	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization	EPW	1.2 kgCO2e
material	W	EPW tool	0.86 kgCO2e
thickness	0.05 µm	EPW overhead	0.344 kgCO2e
material GWP	75.8149 gCO2e/g	MPW	0.00517 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

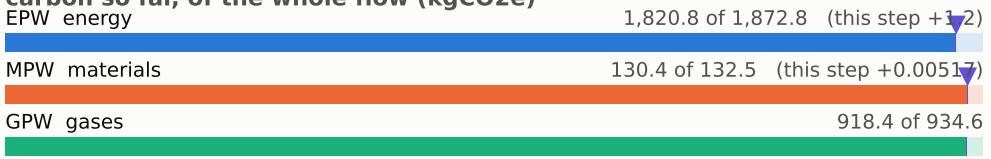

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

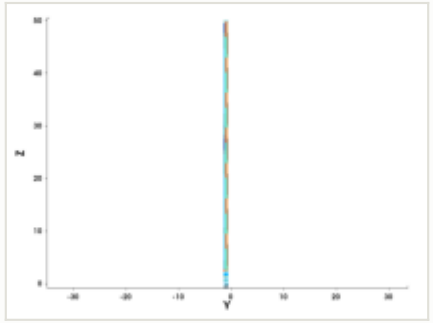

y cut at -1.035 µm

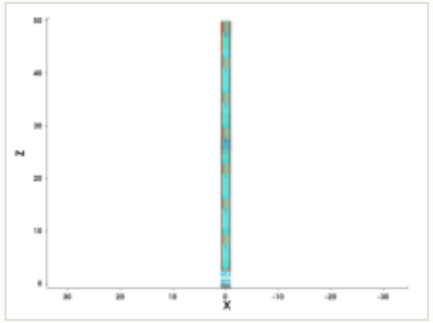

mask for this step

no mask for this step

steps by process area

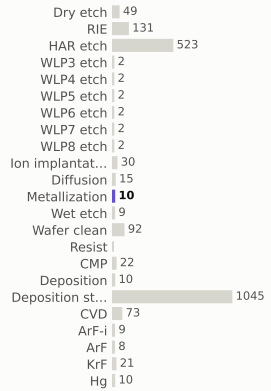

materials deposited (g)

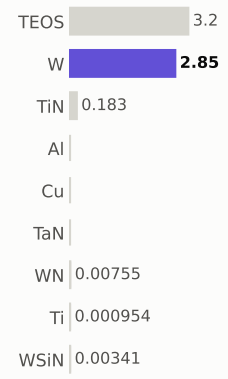

gases emitted (g)

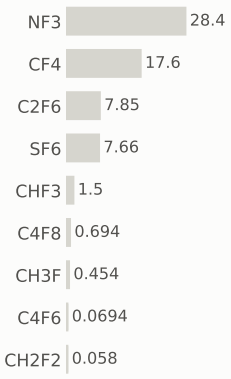

Step #26200: CMP

etch_cmp · CMP

0.169	2,869.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

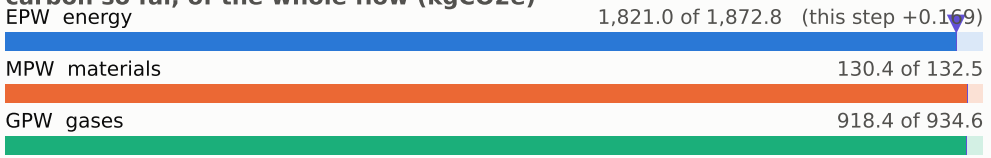

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

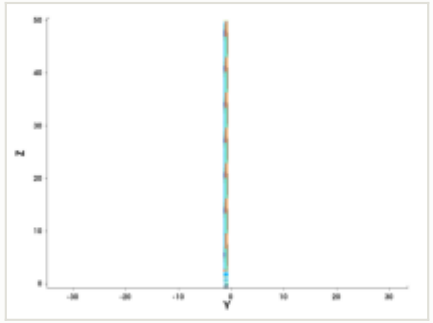

y cut at -1.035 µm

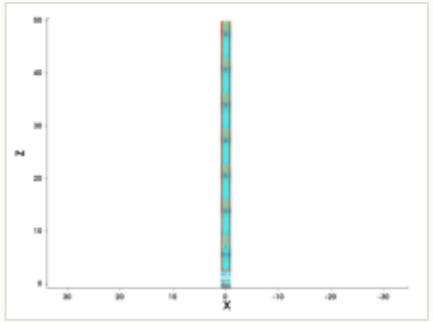

mask for this step

no mask for this step

steps by process area

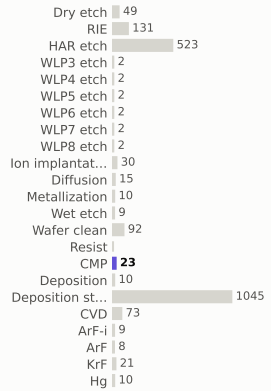

materials deposited (g)

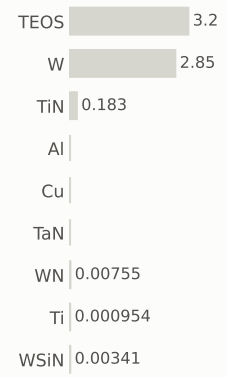

gases emitted (g)

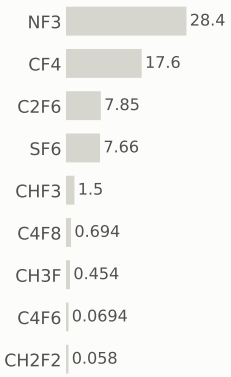

Step #26210: Wafer_clean

clean · Wafer_clean

0.169	2,869.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

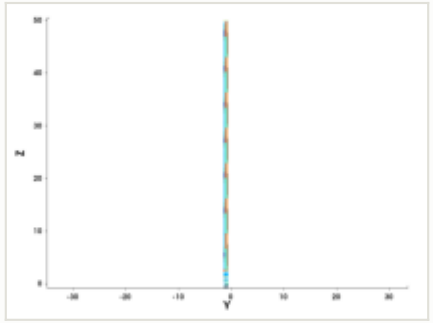

y cut at -1.035 µm

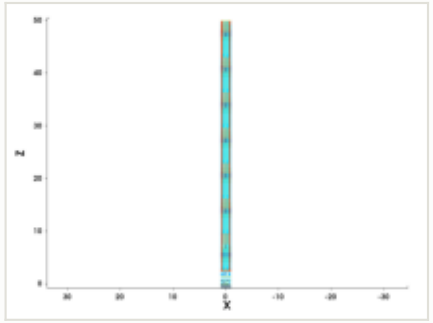

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

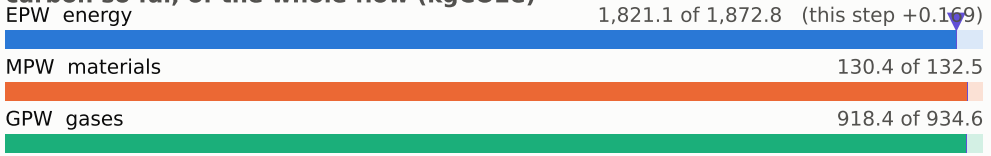

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

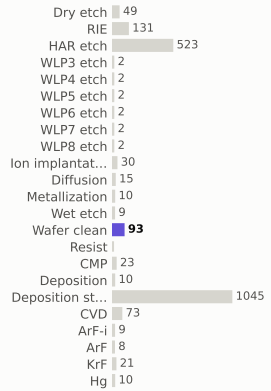

materials deposited (g)

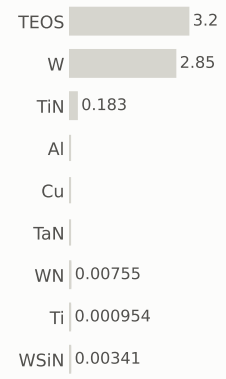

gases emitted (g)

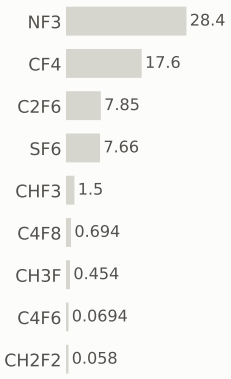

Step #26220: CVD

depo_isotropic · CVD

1.31	2,871.2	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.09 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

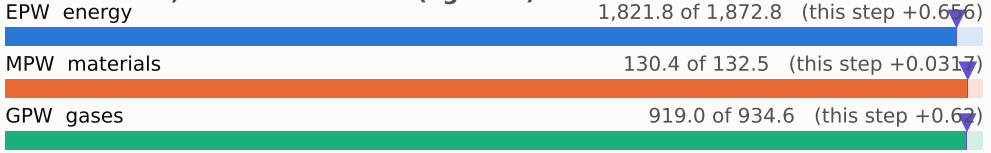

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

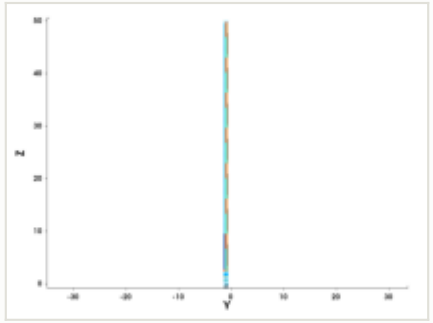

y cut at -1.035 µm

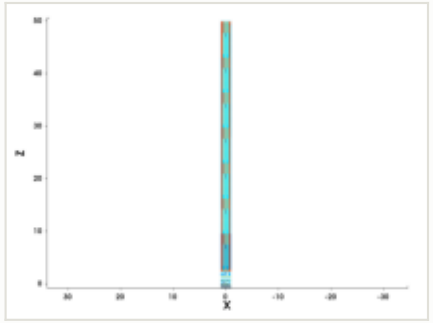

mask for this step

no mask for this step

steps by process area

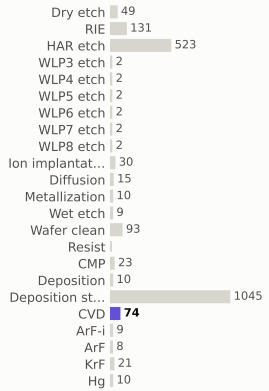

materials deposited (g)

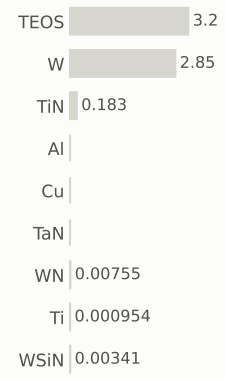

gases emitted (g)

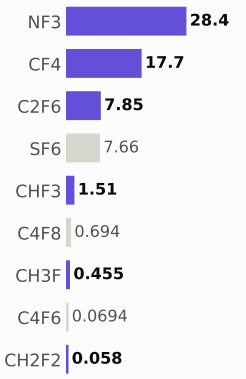

Step #26230: CVD

depo_isotropic · CVD

1.31	2,872.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.024 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

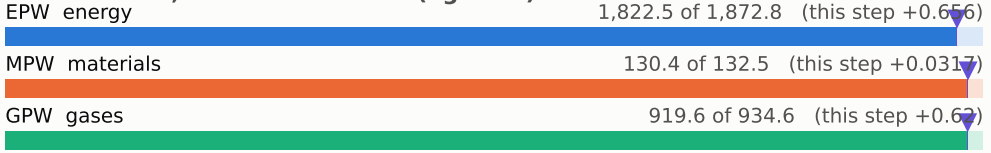

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

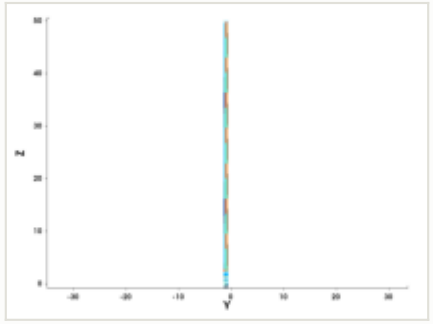

y cut at -1.035 µm

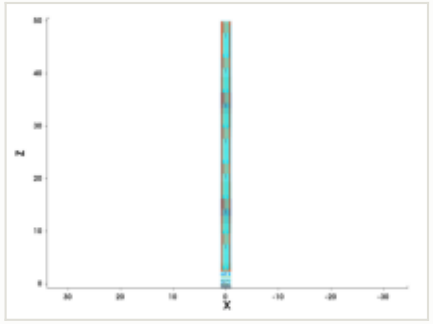

mask for this step

no mask for this step

steps by process area

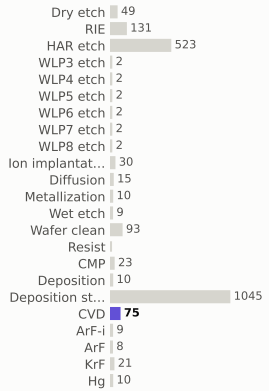

materials deposited (g)

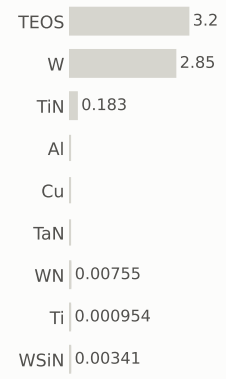

gases emitted (g)

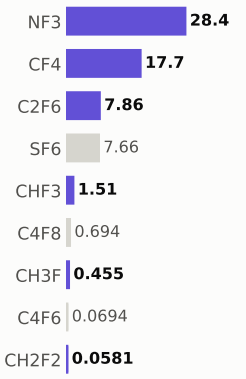

Step #26240: CVD

depo_isotropic · CVD

1.31	2,873.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

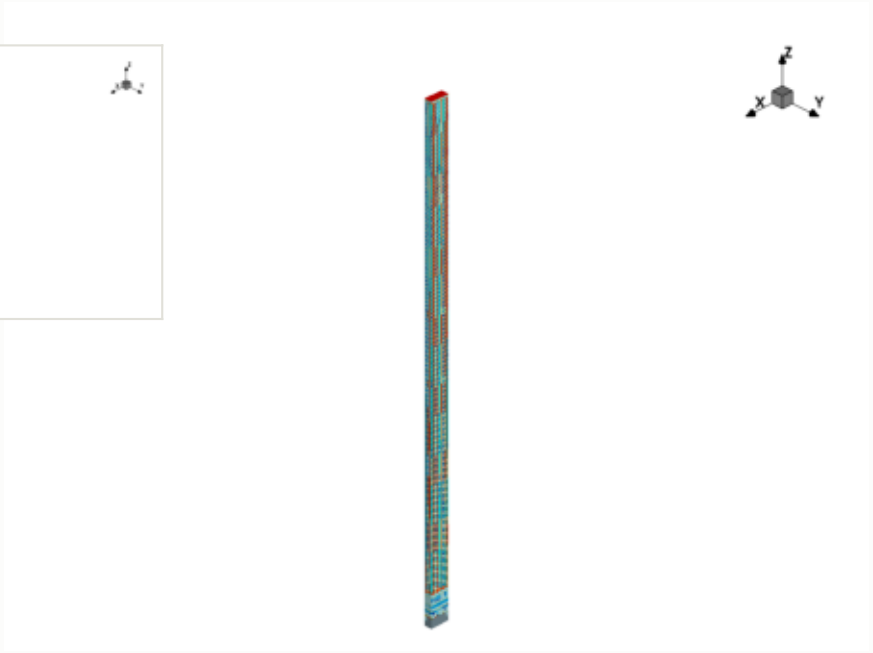

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

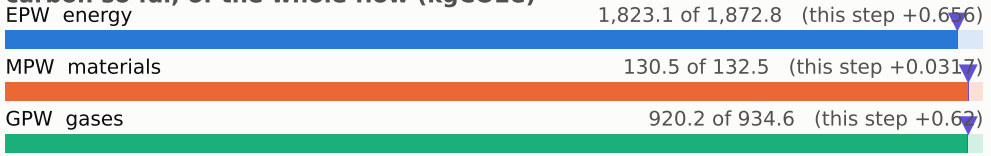

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

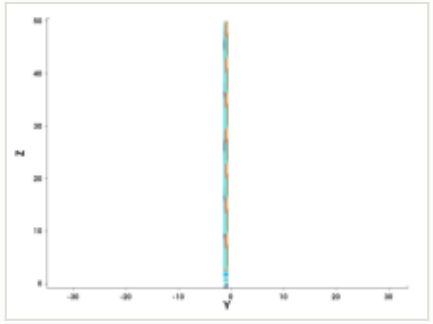

y cut at -1.035 µm

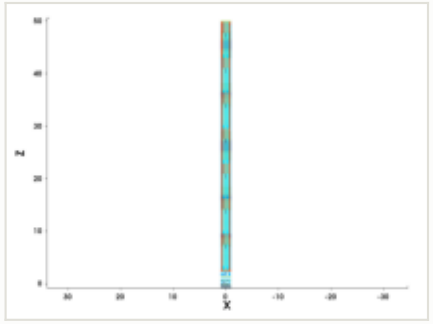

mask for this step

no mask for this step

steps by process area

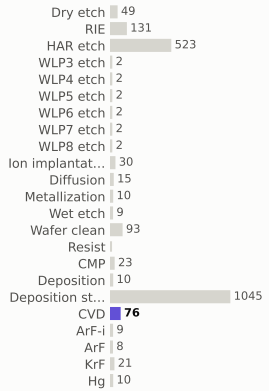

materials deposited (g)

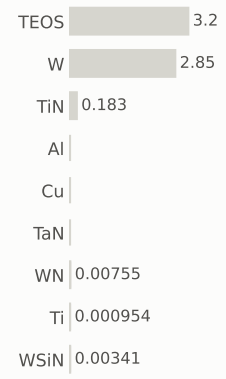

gases emitted (g)

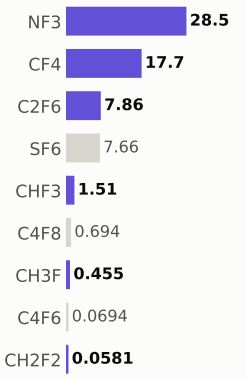

Step #26250: Wafer_clean

clean · Wafer_clean

0.169	2,874.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

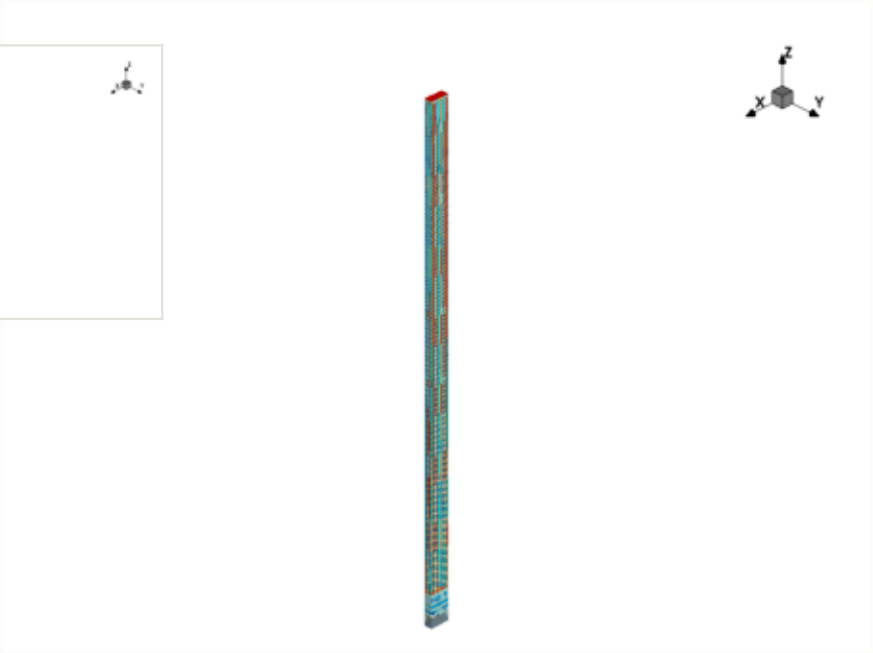

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

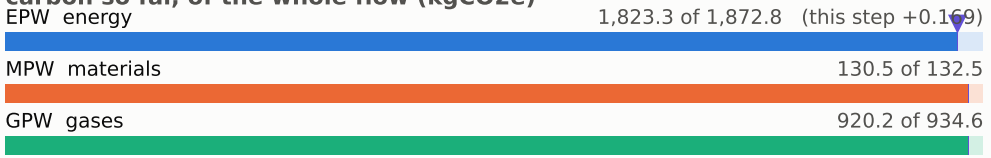

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

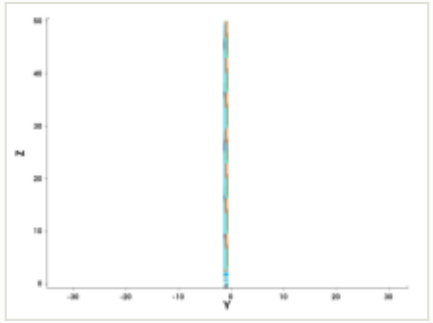

y cut at -1.035 µm

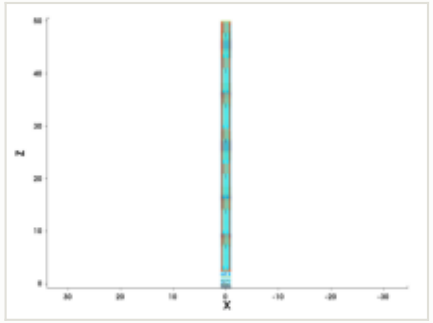

mask for this step

no mask for this step

steps by process area

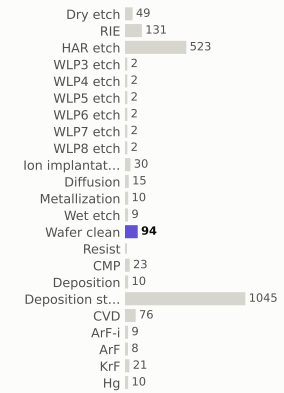

materials deposited (g)



gases emitted (g)

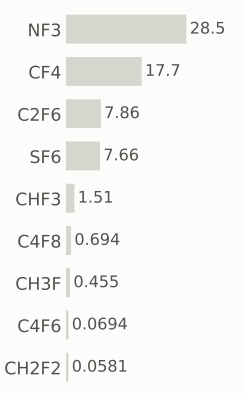

Step #26260: ArF-i

litho_patterning · ArF-i

0.217	2,874.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

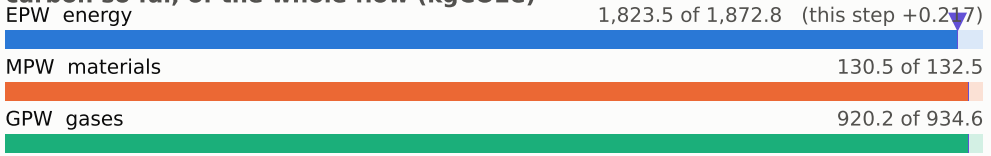

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

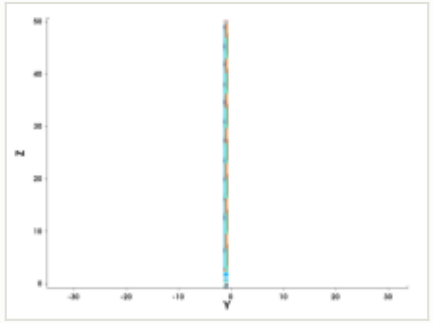

y cut at -1.035 µm

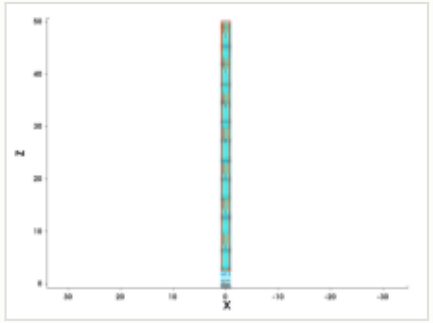

mask: layer 42:0 (OASIS)

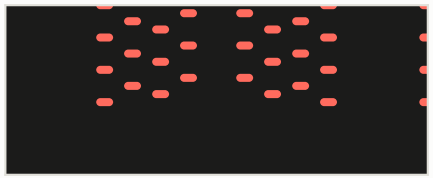

steps by process area

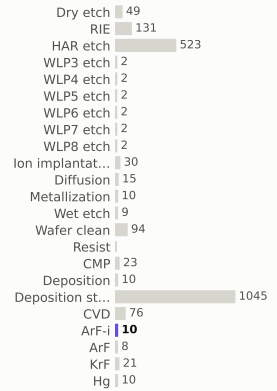

materials deposited (g)



gases emitted (g)

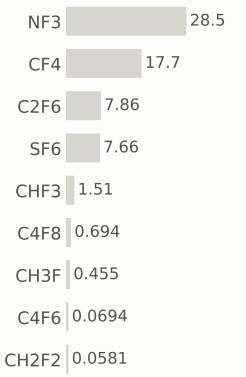

Step #26270: RIE

etch_anisotropic · RIE

1.04	2,875.2	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

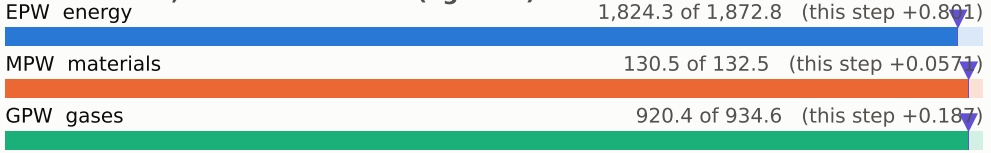

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

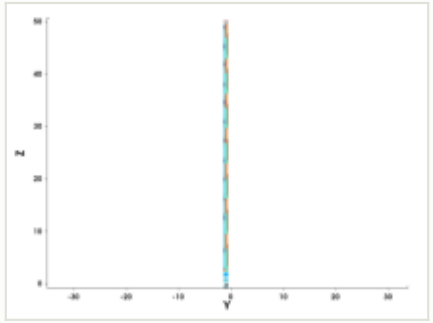

y cut at -1.035 µm

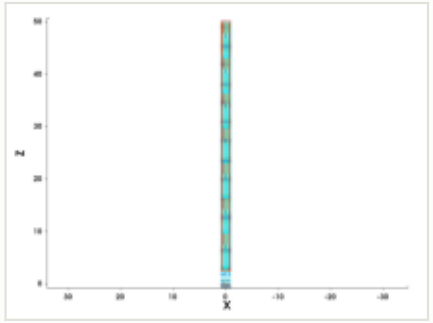

mask for this step

no mask for this step

steps by process area

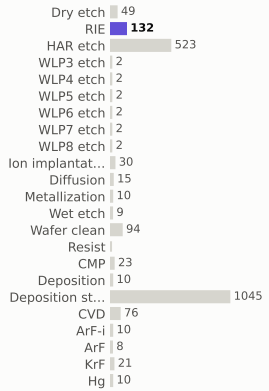

materials deposited (g)

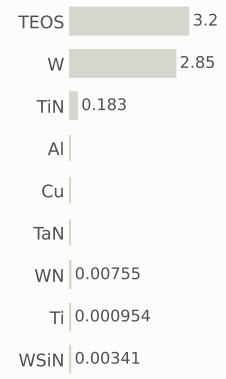

gases emitted (g)

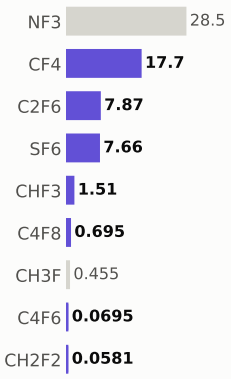

Step #26280: RIE

etch_anisotropic · RIE

1.04	2,876.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

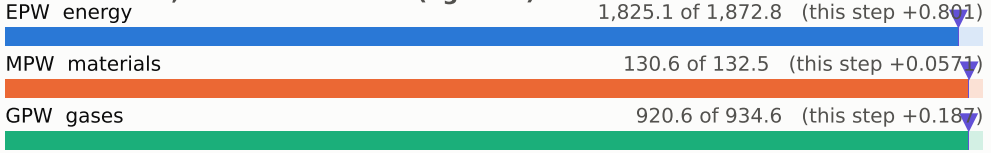

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

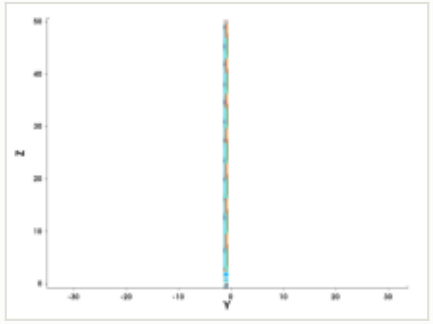

y cut at -1.035 µm

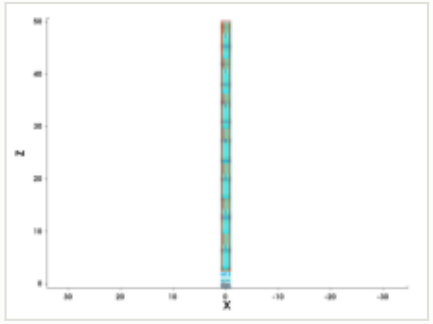

mask for this step

no mask for this step

steps by process area

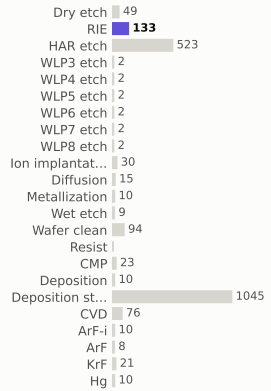

materials deposited (g)

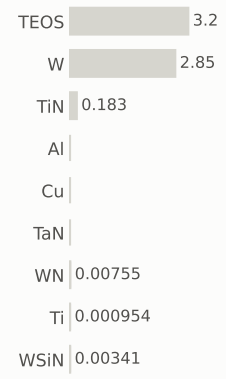

gases emitted (g)

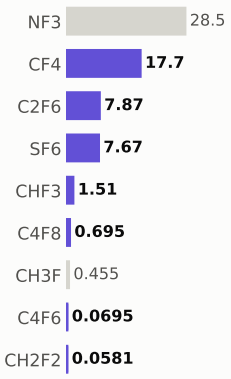

Step #26290: RIE

etch_isotropic · RIE

1.04	2,877.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

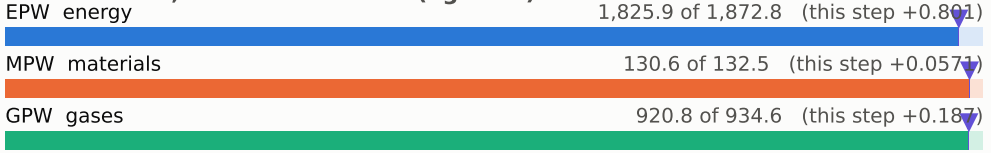

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

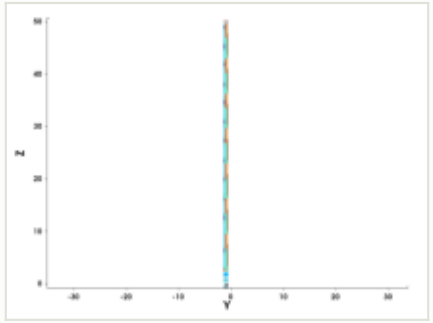

y cut at -1.035 µm

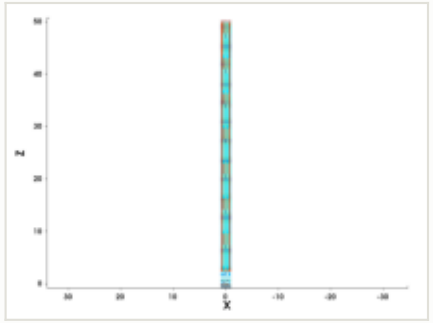

mask for this step

no mask for this step

steps by process area

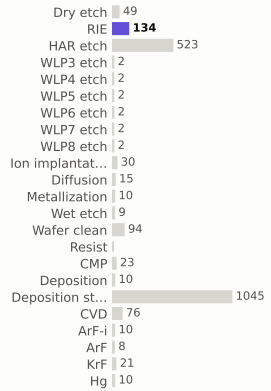

materials deposited (g)

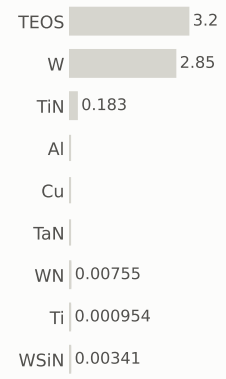

gases emitted (g)

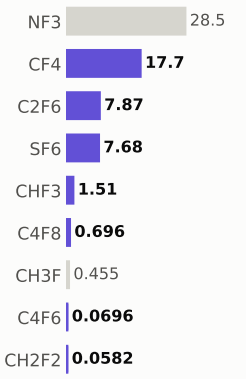

Step #26300: Dry_etch

etch_strip · Dry_etch

0.801	2,878.1	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

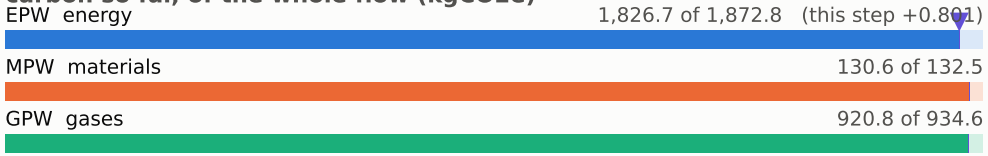

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

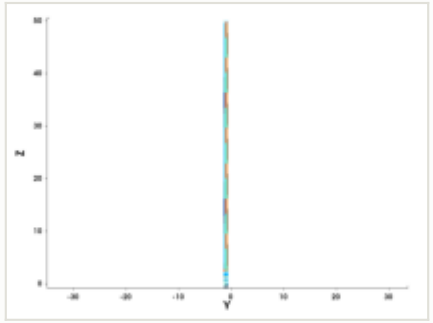

y cut at -1.035 µm

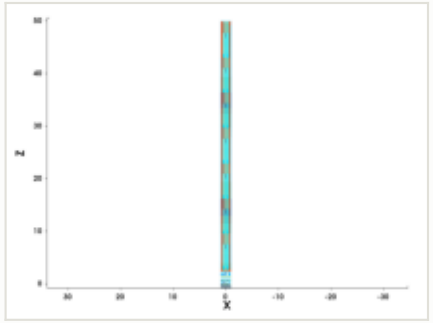

mask for this step

no mask for this step

steps by process area

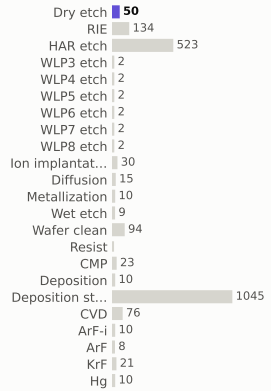

materials deposited (g)

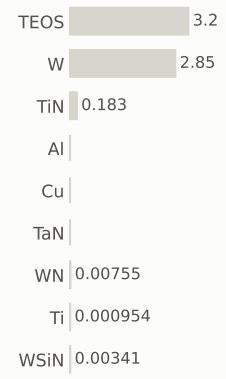

gases emitted (g)

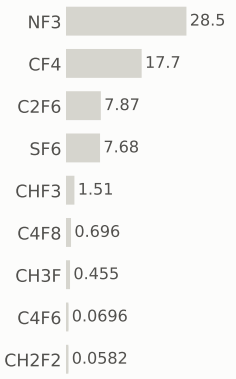

Step #26310: Wafer_clean

clean · Wafer_clean

0.169	2,878.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

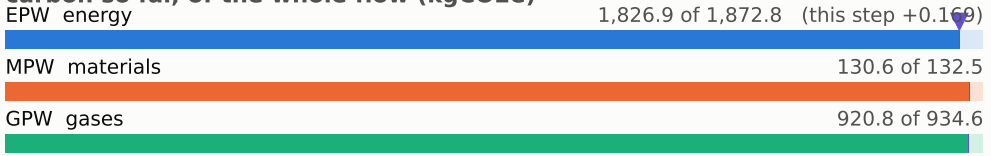

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

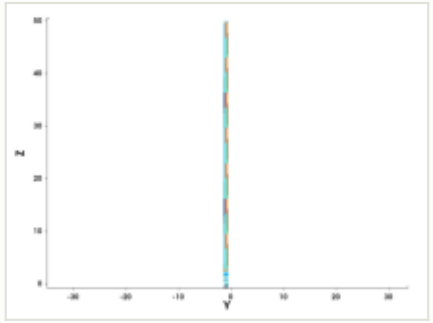

y cut at -1.035 µm

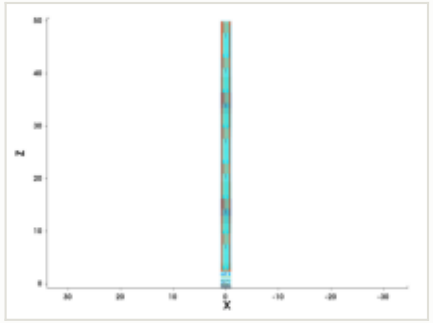

mask for this step

no mask for this step

steps by process area

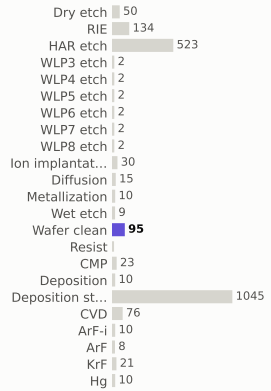

materials deposited (g)

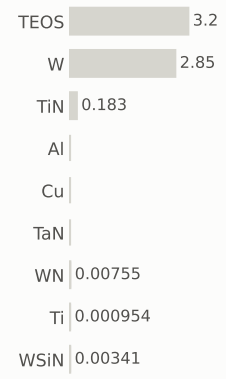

gases emitted (g)

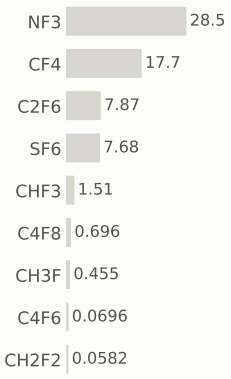

Step #26320: CVD

depo_ellipsoidal · CVD

1.31	2,879.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

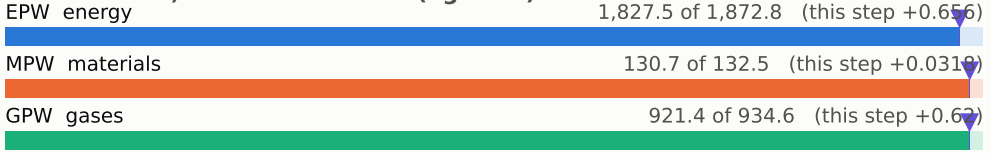

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

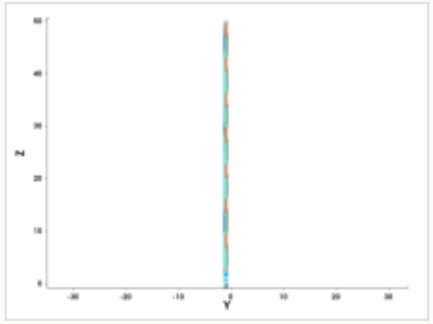

y cut at -1.035 µm

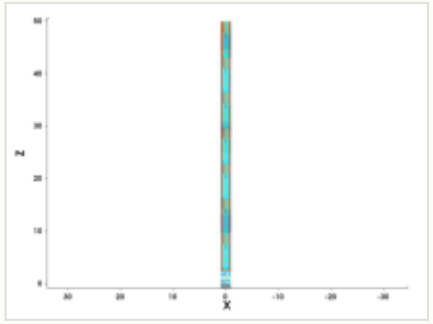

mask for this step

no mask for this step

steps by process area

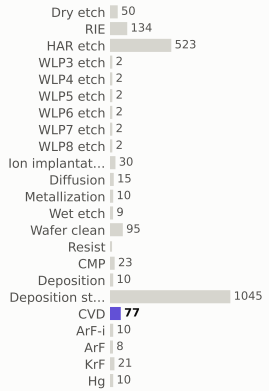

materials deposited (g)

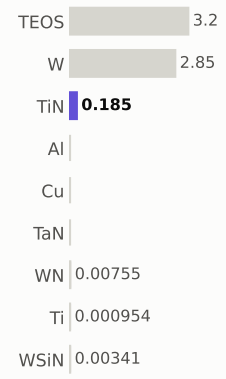

gases emitted (g)

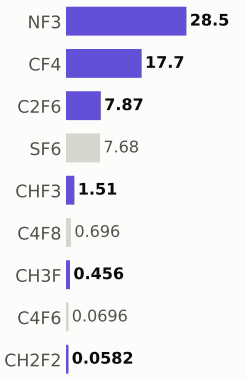

Step #26330: Metallization

depo_isotropic · Metallization

1.22	2,880.8	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

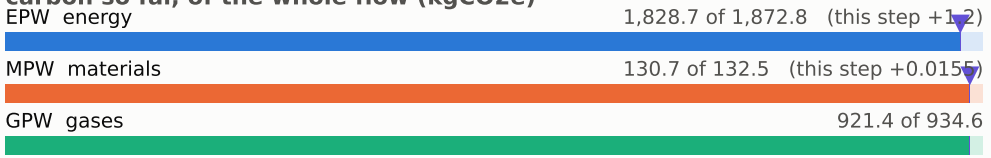

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

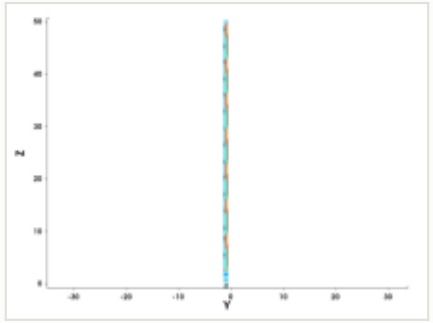

y cut at -1.035 µm

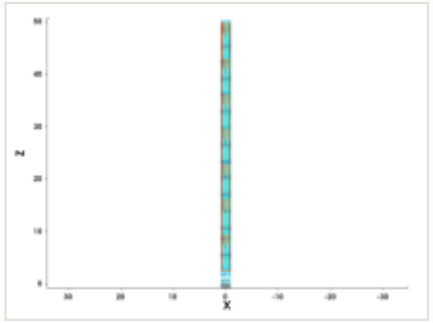

mask for this step

no mask for this step

steps by process area

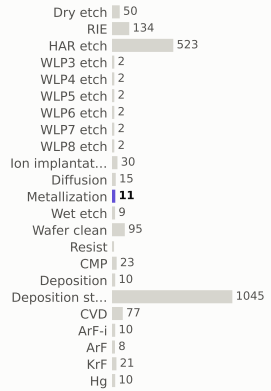

materials deposited (g)

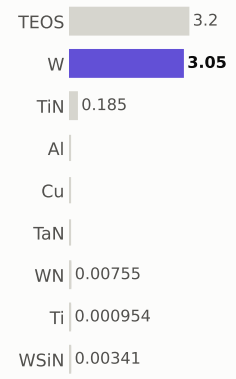

gases emitted (g)

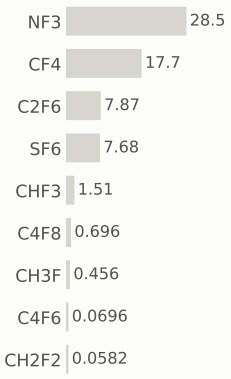

Step #26340: CMP

etch_cmp · CMP

0.169	2,881.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

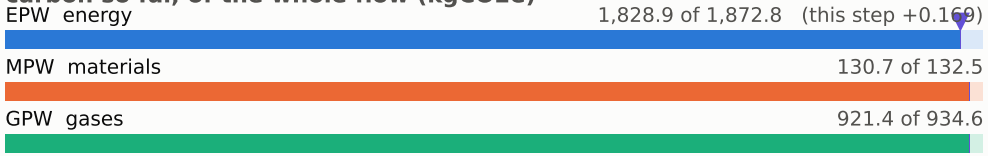

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

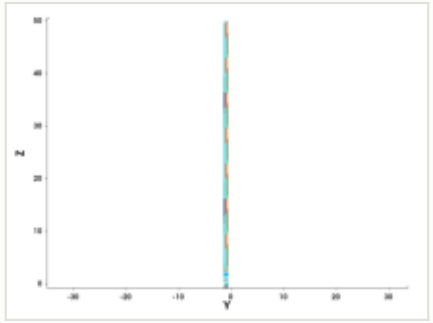

y cut at -1.035 µm

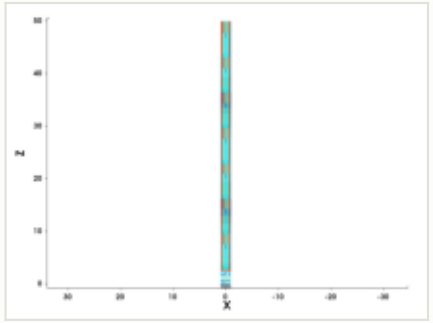

mask for this step

no mask for this step

steps by process area

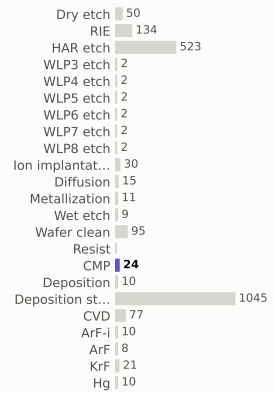

materials deposited (g)

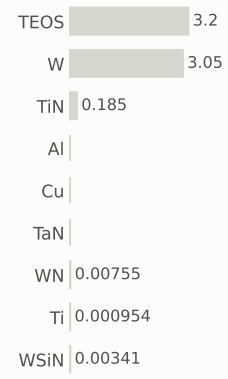

gases emitted (g)

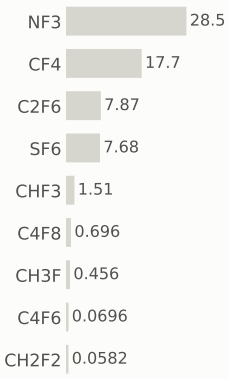

Step #26350: RIE

etch_anisotropic · RIE

1.04	2,882.0	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

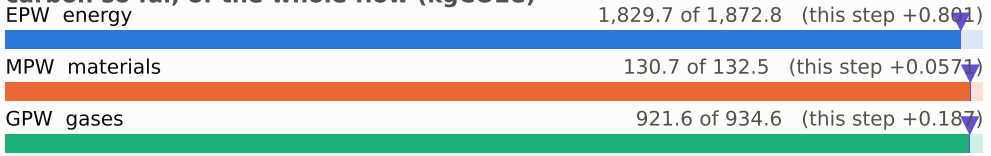

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

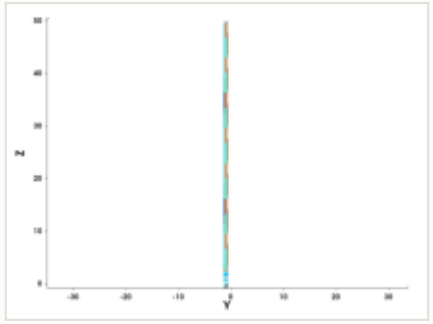

y cut at -1.035 µm

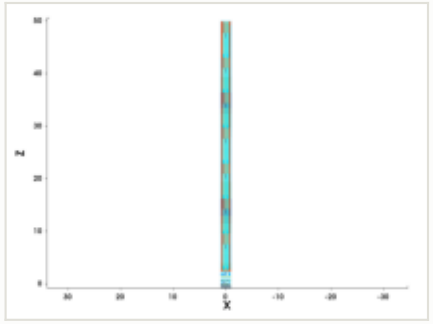

mask for this step

no mask for this step

steps by process area

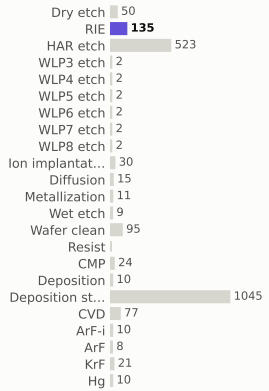

materials deposited (g)

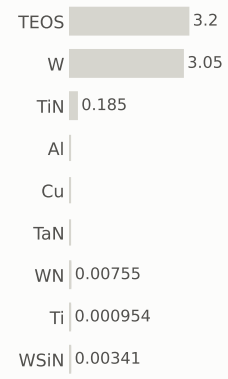

gases emitted (g)

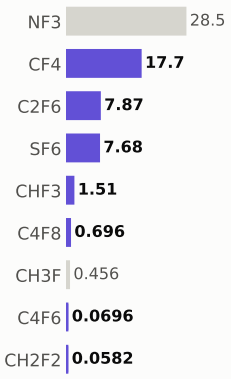

Step #26360: CVD

depo_isotropic · CVD

1.31	2,883.4	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.05 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

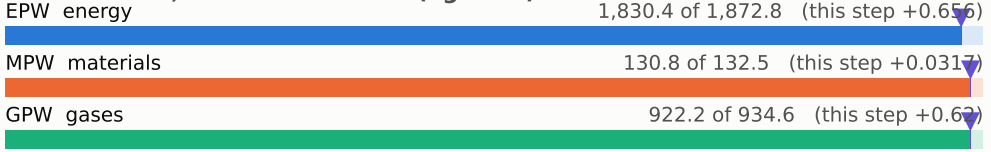

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

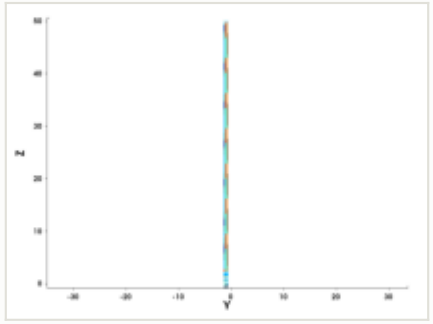

y cut at -1.035 µm

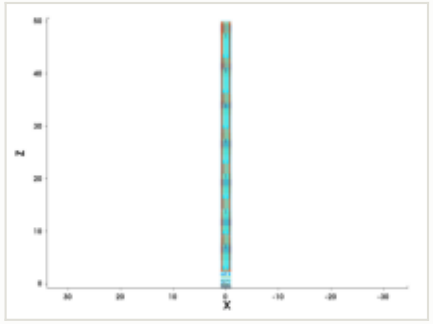

mask for this step

no mask for this step

steps by process area

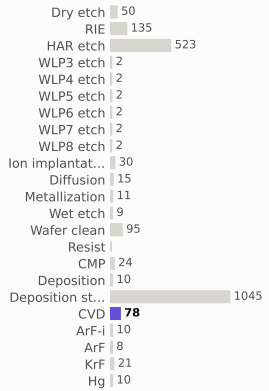

materials deposited (g)

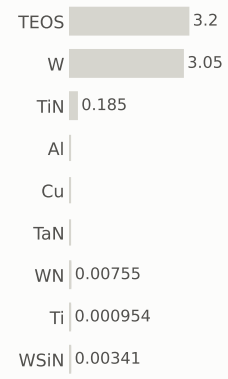

gases emitted (g)

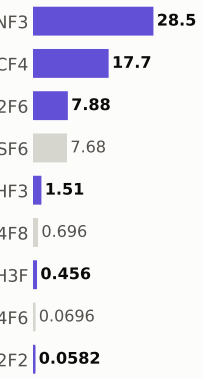

Step #26370: CMP

etch_cmp · CMP

0.169	2,883.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

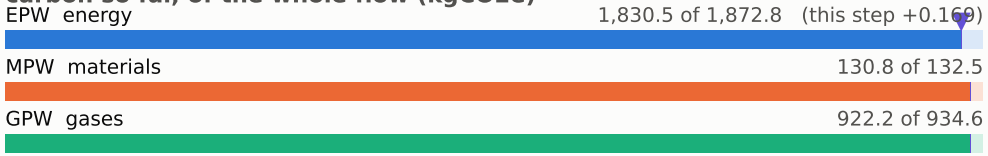

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

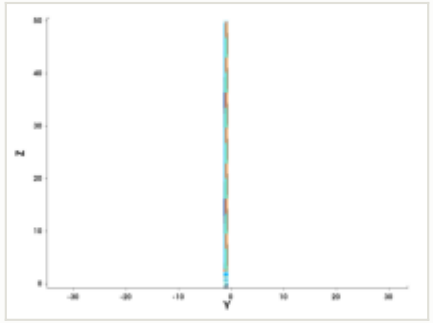

y cut at -1.035 µm

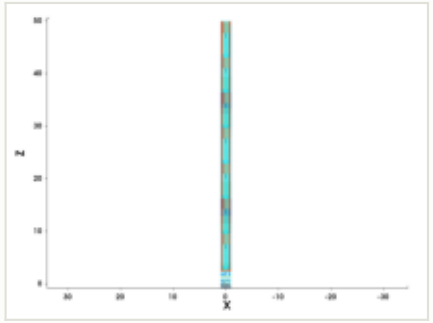

mask for this step

no mask for this step

steps by process area

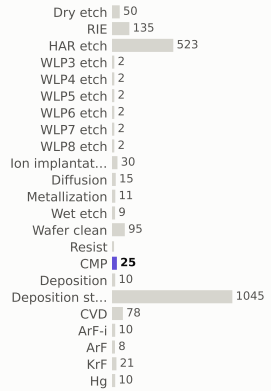

materials deposited (g)

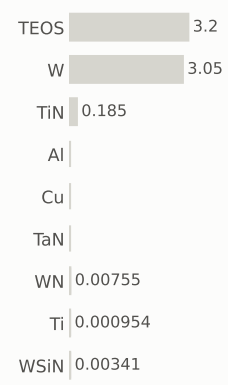

gases emitted (g)

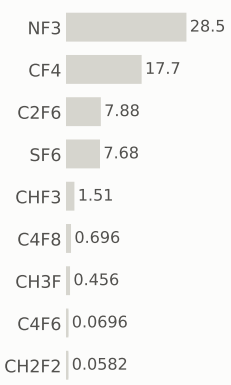

Step #26380: Wafer_clean

clean · Wafer_clean

0.169	2,883.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

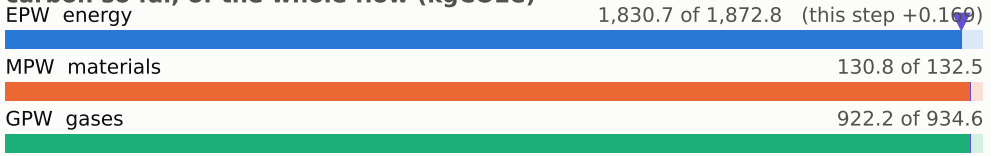

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

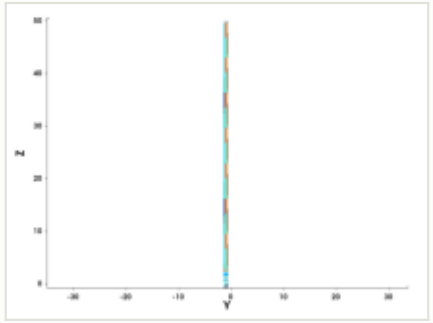

y cut at -1.035 µm

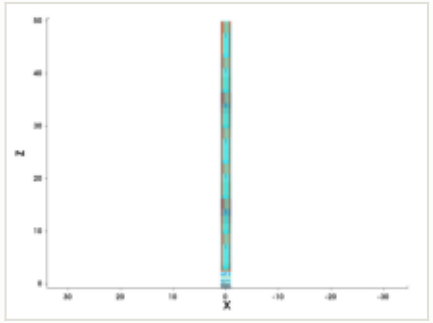

mask for this step

no mask for this step

steps by process area

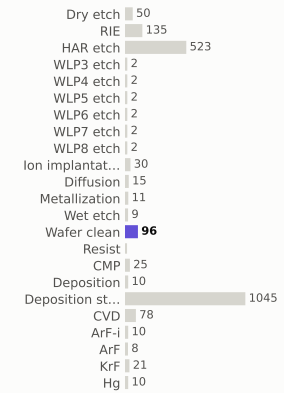

materials deposited (g)

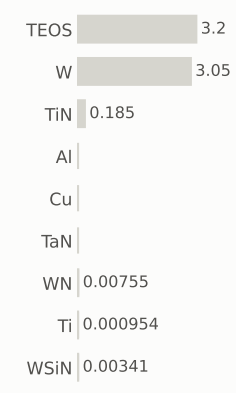

gases emitted (g)

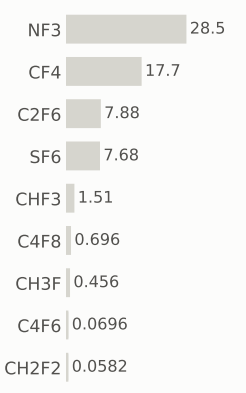

Step #26390: CVD

depo_isotropic · CVD

1.31	2,885.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

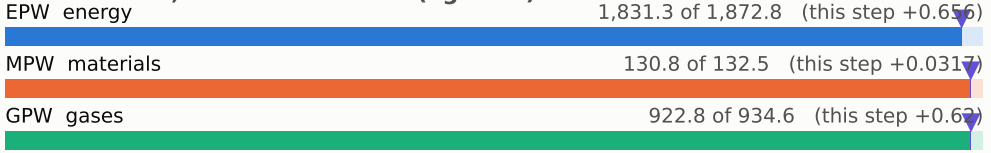

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

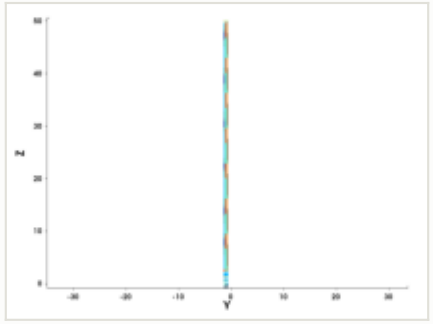

y cut at -1.035 µm

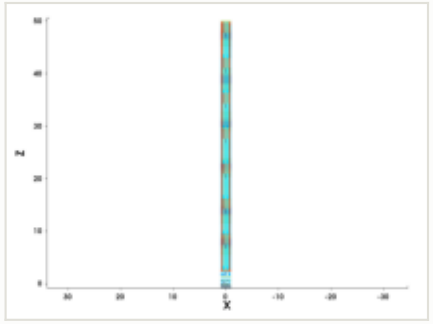

mask for this step

no mask for this step

steps by process area

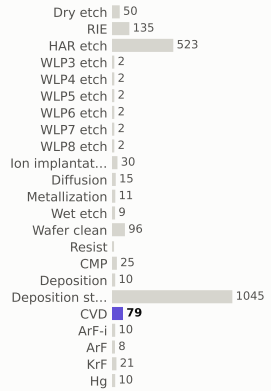

materials deposited (g)



gases emitted (g)

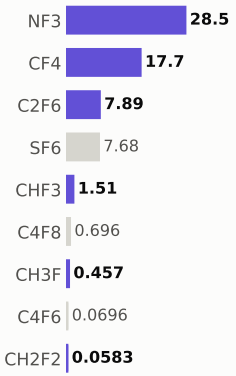

Step #26410: CVD

depo_isotropic · CVD

1.31	2,886.3	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.1 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

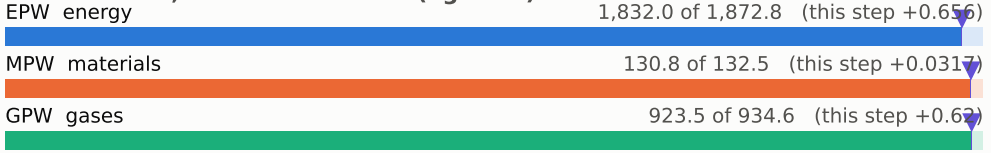

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

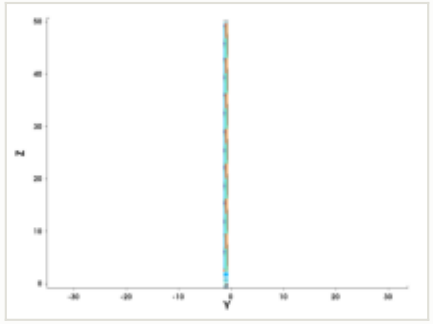

y cut at -1.035 µm

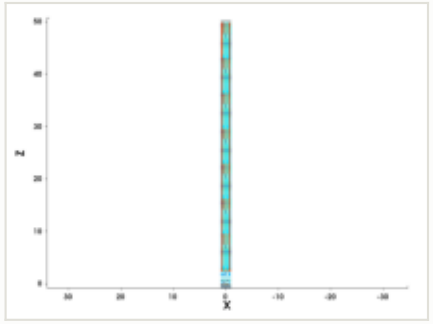

mask for this step

no mask for this step

steps by process area

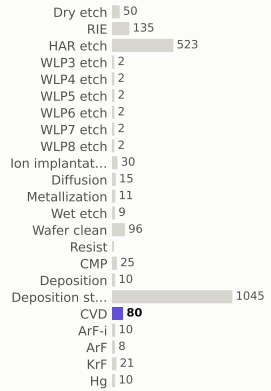

materials deposited (g)

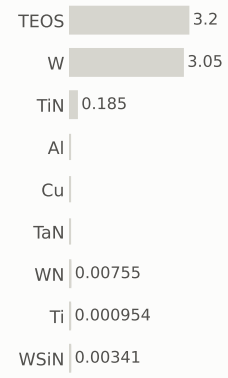

gases emitted (g)

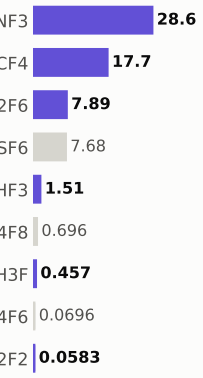

Step #26420: CVD

depo_isotropic · CVD

1.31	2,887.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0321 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

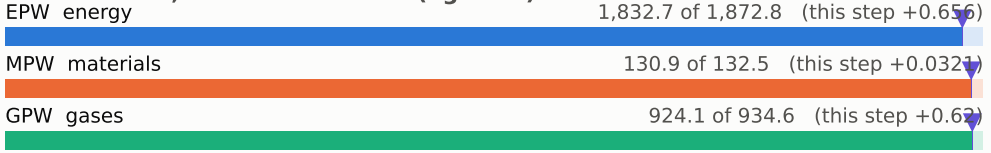

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

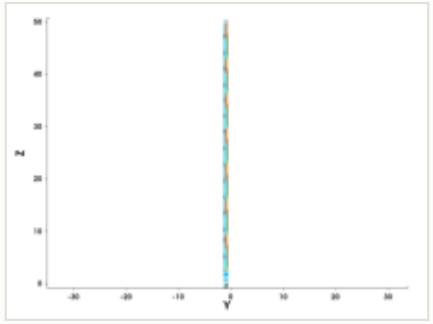

y cut at -1.035 µm

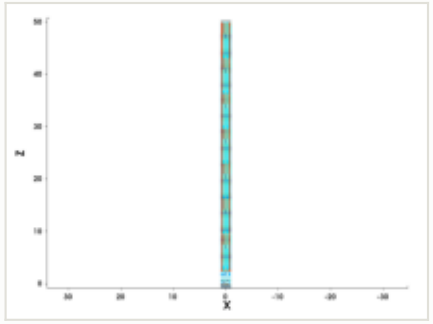

mask for this step

no mask for this step

steps by process area

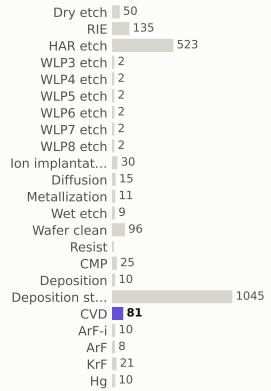

materials deposited (g)



gases emitted (g)

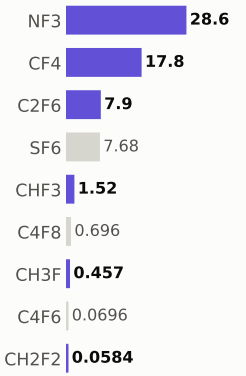

Step #26430: CVD

depo_isotropic · CVD

1.31	2,888.9	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

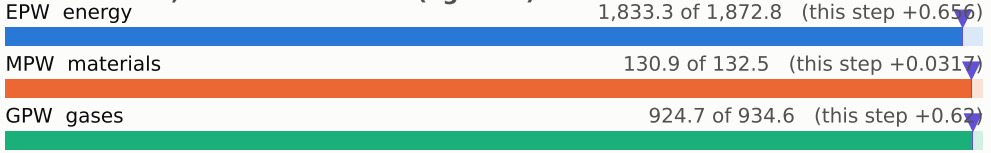

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

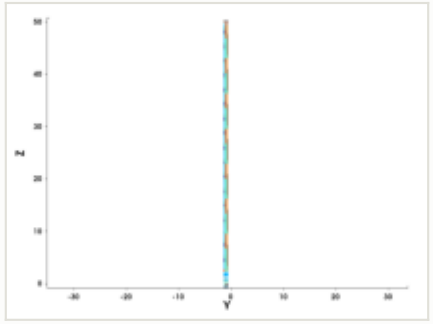

y cut at -1.035 µm

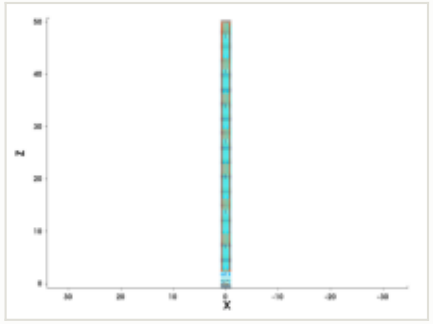

mask for this step

no mask for this step

steps by process area

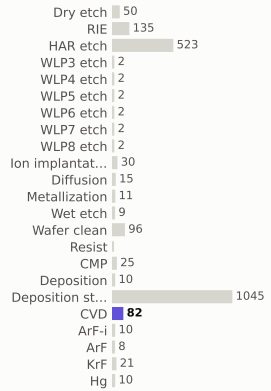

materials deposited (g)



gases emitted (g)



Step #26440: CVD

depo_isotropic · CVD

1.31	2,890.2	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0321 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

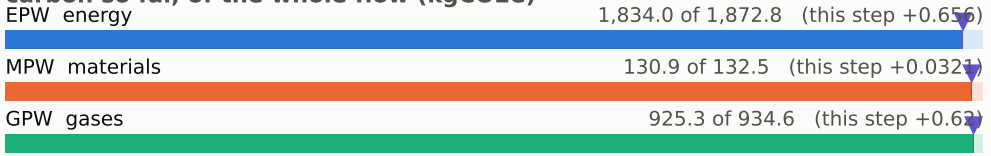

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

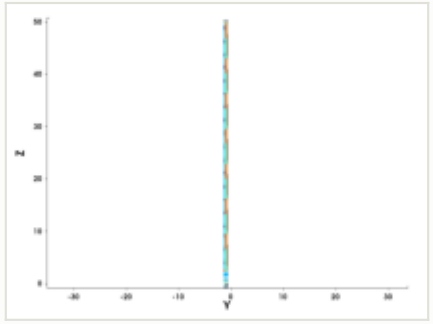

y cut at -1.035 µm

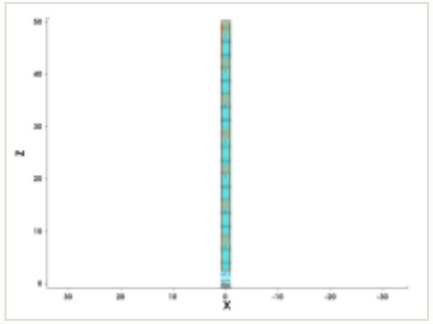

mask for this step

no mask for this step

steps by process area

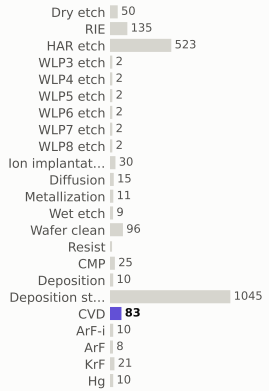

materials deposited (g)

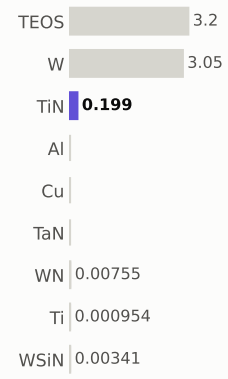

gases emitted (g)

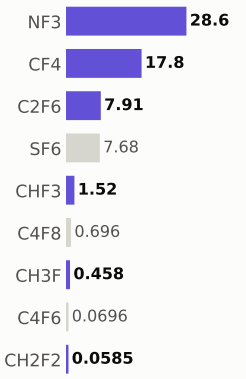

Step #26450: CVD

depo_isotropic · CVD

1.31	2,891.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

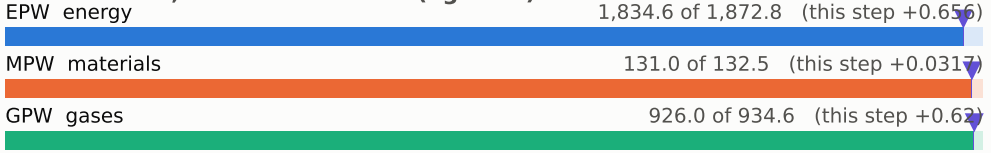

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

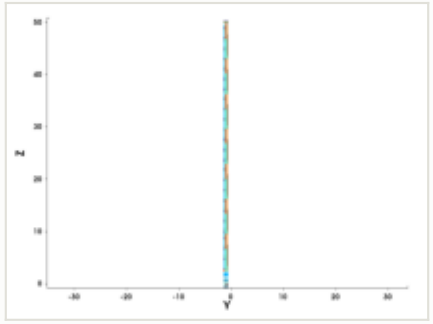

y cut at -1.035 µm

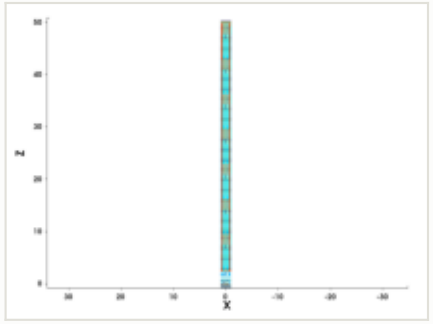

mask for this step

no mask for this step

steps by process area

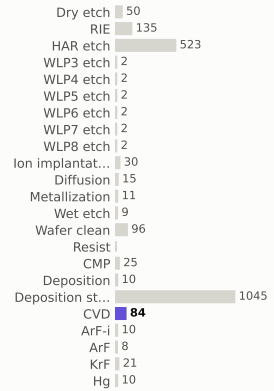

materials deposited (g)

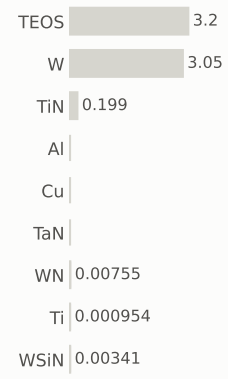

gases emitted (g)

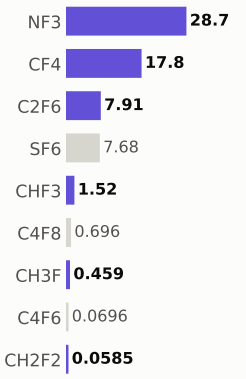

Step #26460: CVD

depo_isotropic · CVD

1.31	2,892.8	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

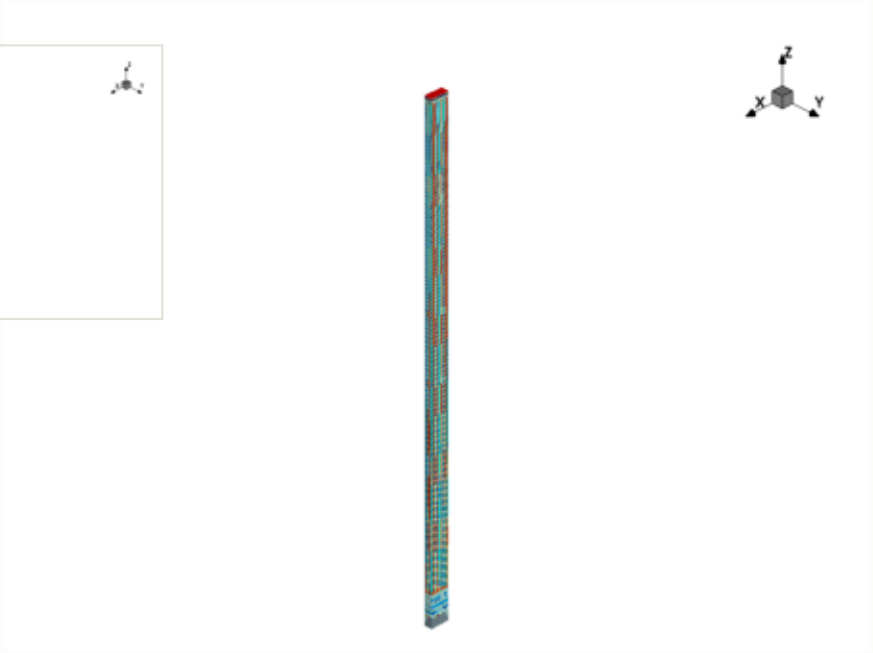

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

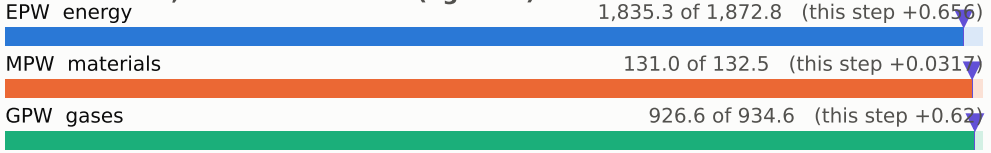

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

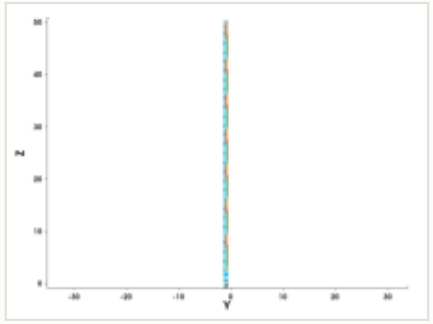

y cut at -1.035 µm

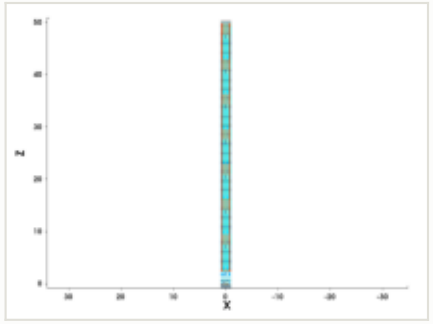

mask for this step

no mask for this step

steps by process area

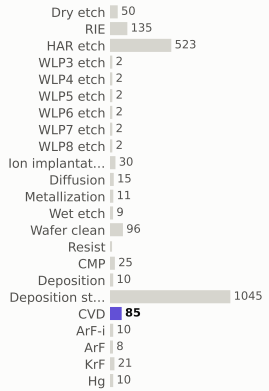

materials deposited (g)

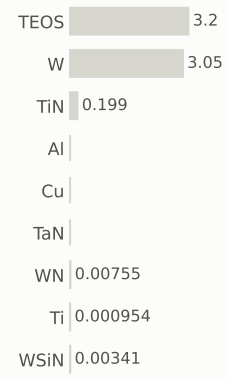

gases emitted (g)

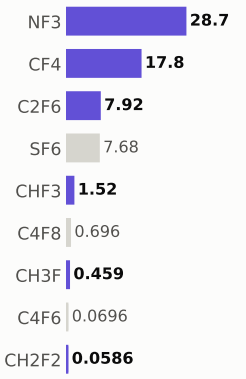

Step #26470: Wafer_clean

clean · Wafer_clean

0.169	2,893.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

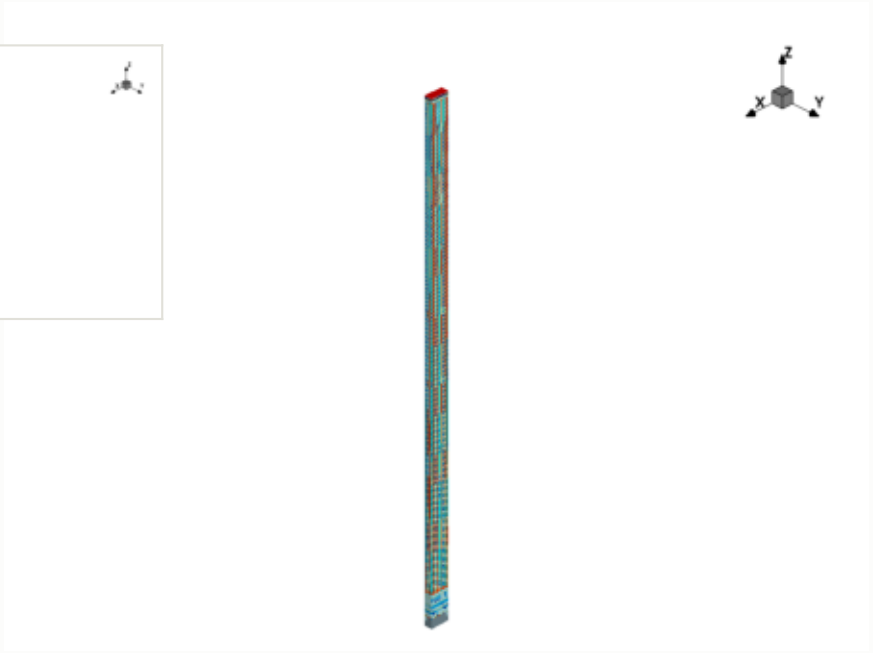

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

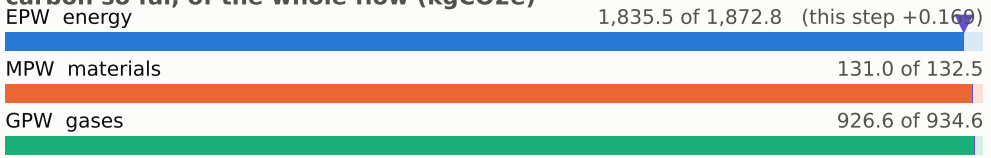

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

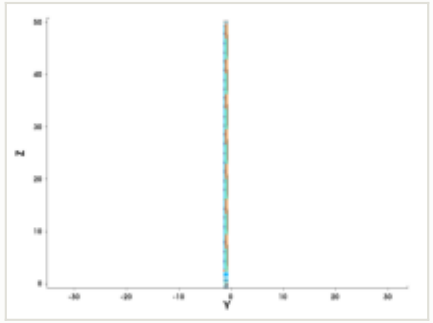

y cut at -1.035 µm

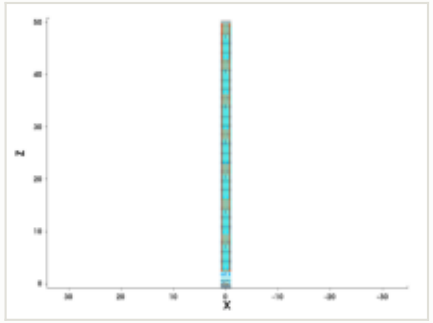

mask for this step

no mask for this step

steps by process area

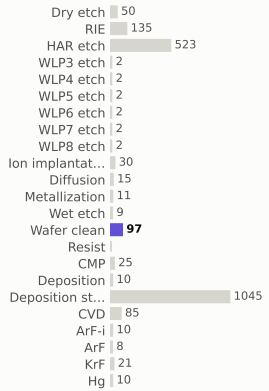

materials deposited (g)

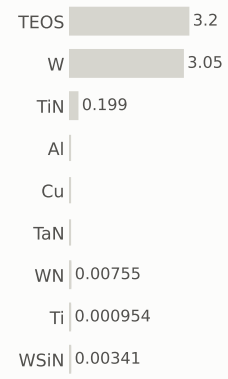

gases emitted (g)

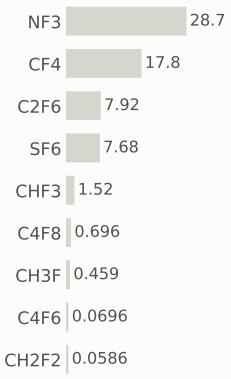

Step #26480: ArF-i

litho_patterning · ArF-i

0.217	2,893.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

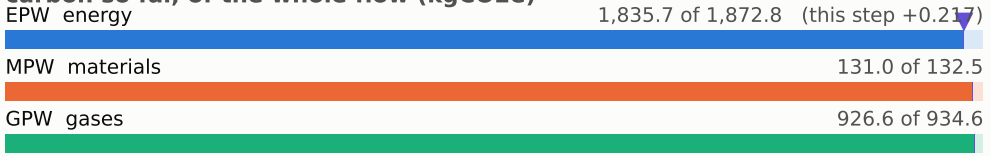

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

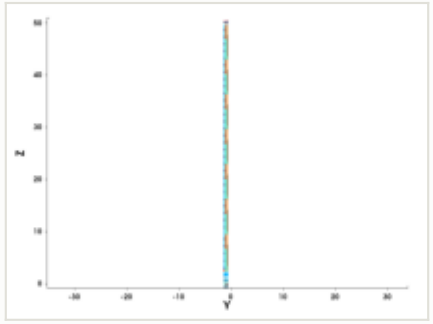

y cut at -1.035 µm

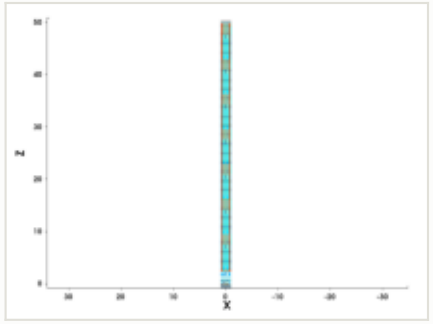

mask: layer 43:0, positive (OASIS)

steps by process area

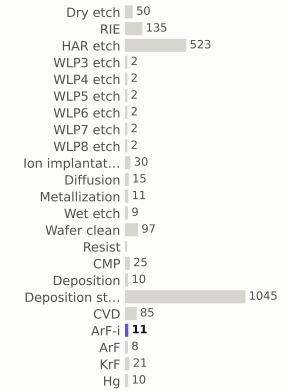

materials deposited (g)

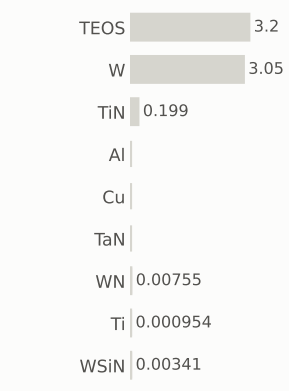

gases emitted (g)

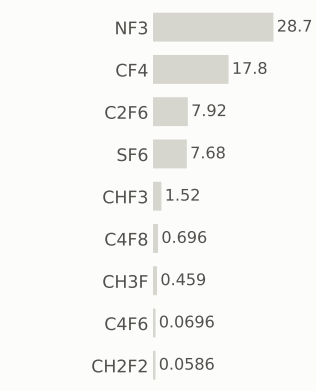

Step #26490: RIE

etch_isotropic · RIE

1.04	2,894.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

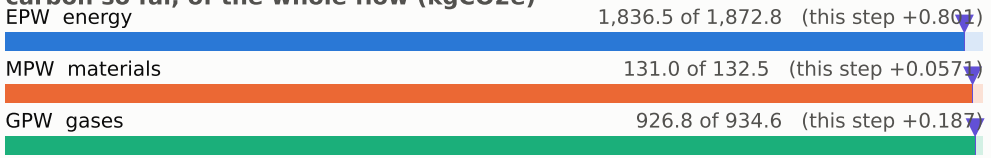

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

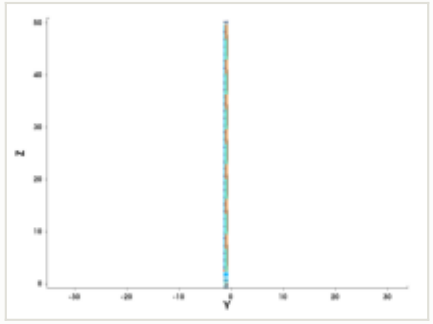

y cut at -1.035 µm

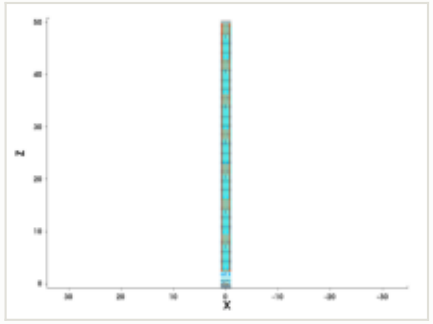

mask for this step

no mask for this step

steps by process area

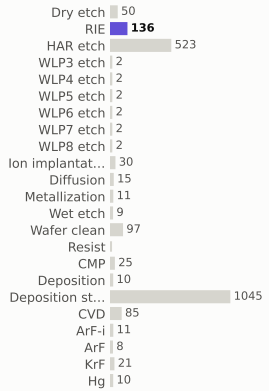

materials deposited (g)

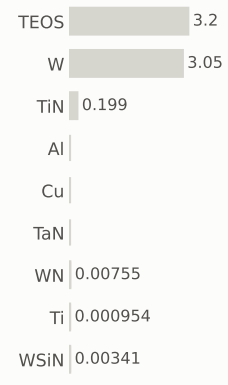

gases emitted (g)

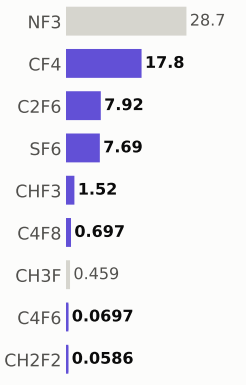

Step #26500: RIE

etch_anisotropic · RIE

1.04	2,895.3	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

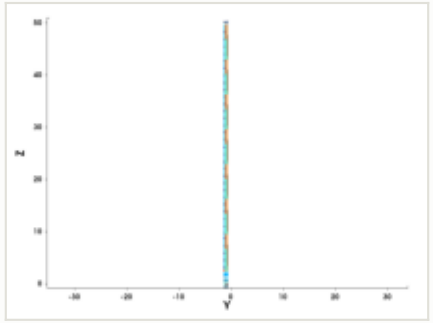

y cut at -1.035 µm

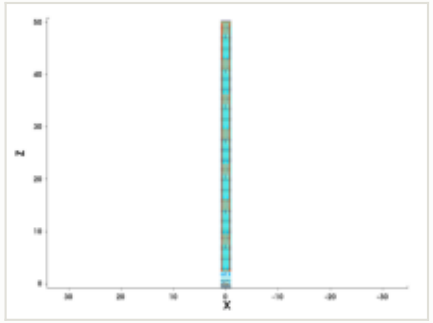

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

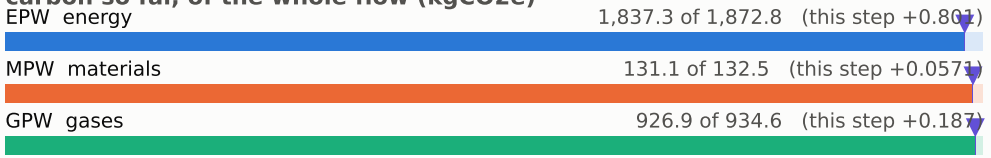

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

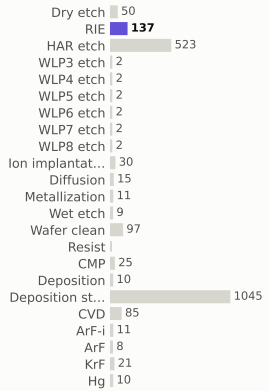

materials deposited (g)

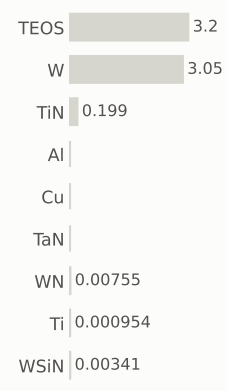

gases emitted (g)

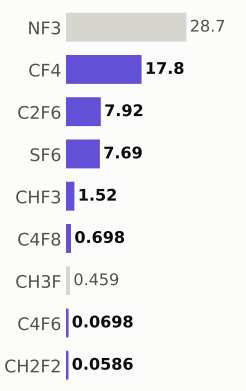

Step #26510: RIE

etch_anisotropic · RIE

1.04	2,896.4	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

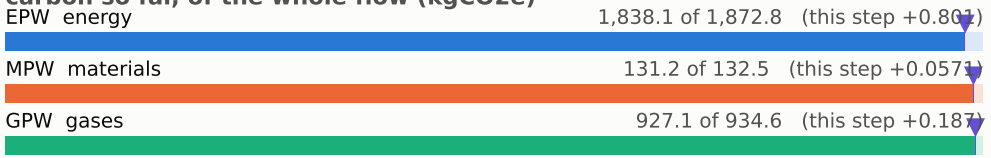

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

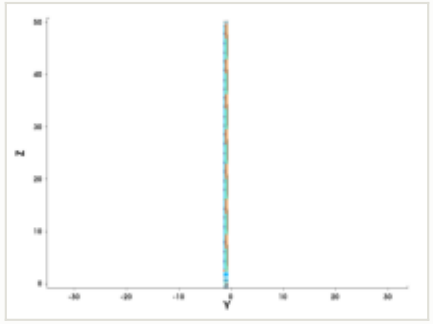

y cut at -1.035 µm

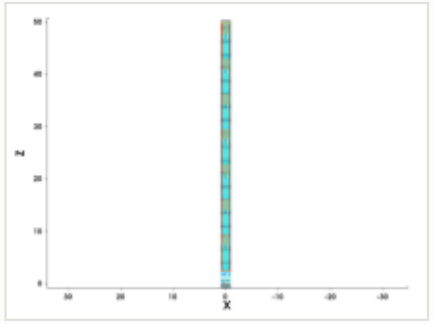

mask for this step

no mask for this step

steps by process area

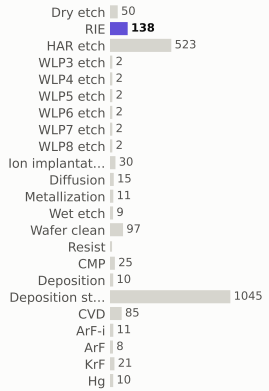

materials deposited (g)

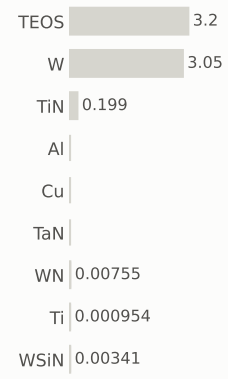

gases emitted (g)

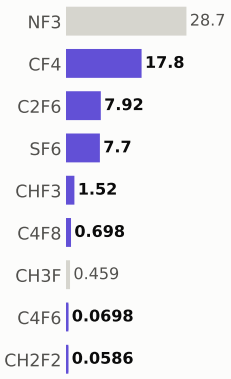

Step #26520: Dry_etch

etch_strip · Dry_etch

0.801	2,897.2	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

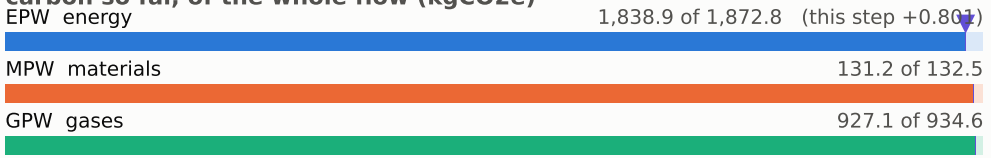

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

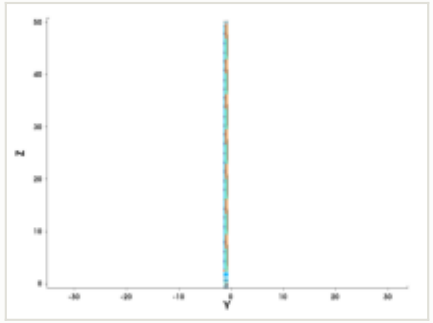

y cut at -1.035 µm

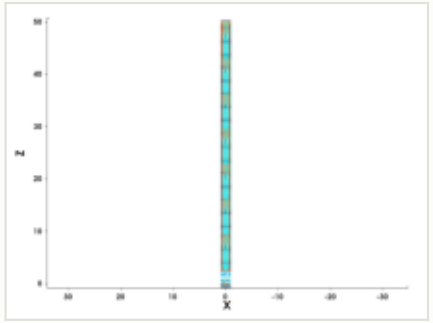

mask for this step

no mask for this step

steps by process area

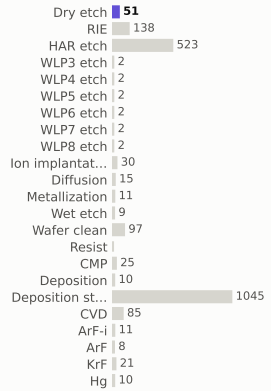

materials deposited (g)

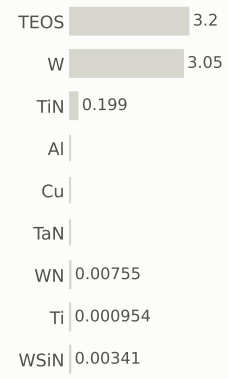

gases emitted (g)

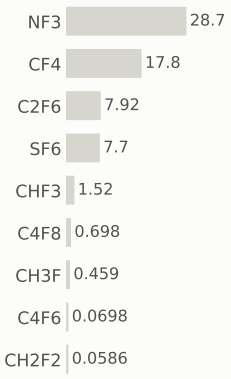

Step #26530: CVD

depo_isotropic · CVD

1.31	2,898.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.016 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

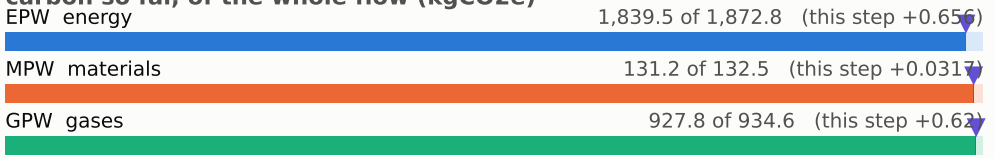

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

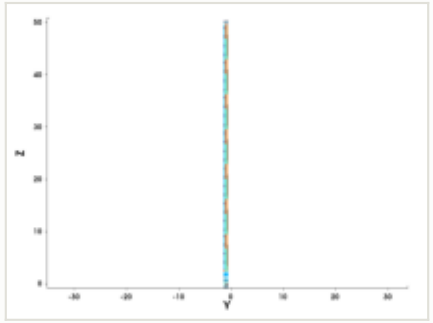

y cut at -1.035 µm

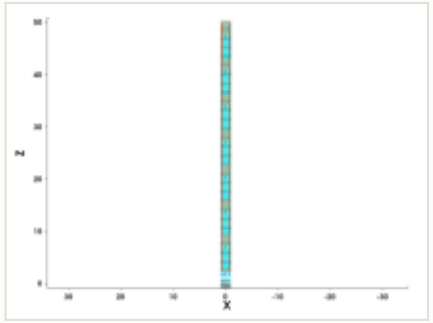

mask for this step

no mask for this step

steps by process area

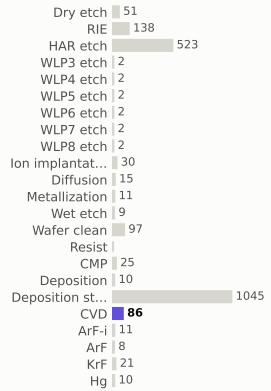

materials deposited (g)

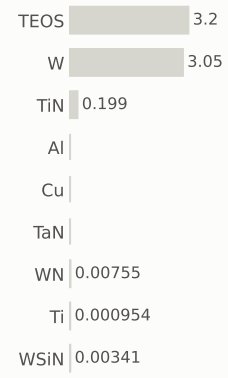

gases emitted (g)

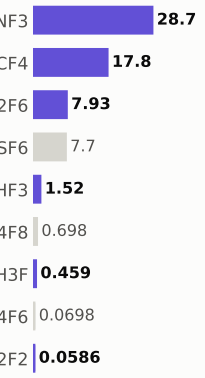

Step #26540: RIE

etch_anisotropic · RIE

1.04	2,899.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

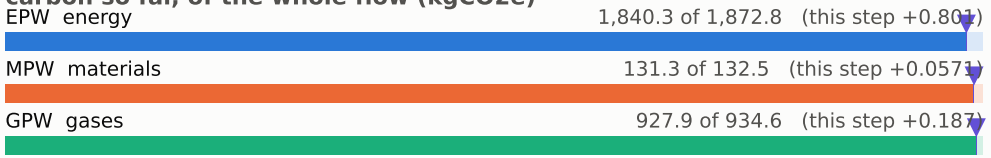

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

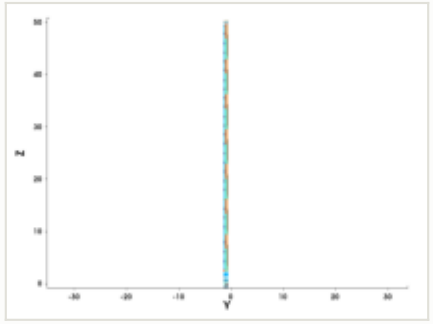

y cut at -1.035 µm

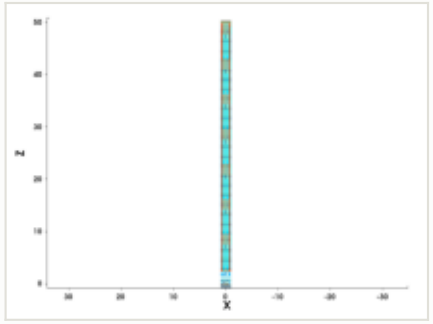

mask for this step

no mask for this step

steps by process area

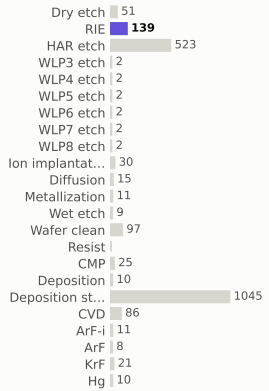

materials deposited (g)

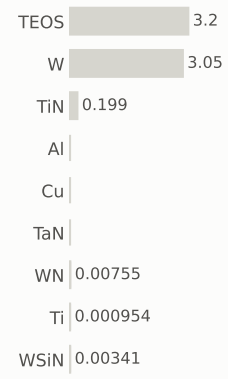

gases emitted (g)

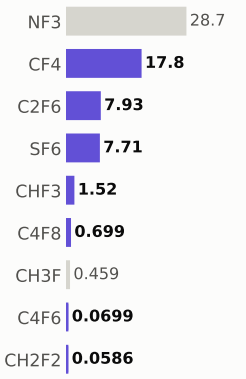

Step #26550: RIE

etch_anisotropic · RIE

1.04	2,900.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

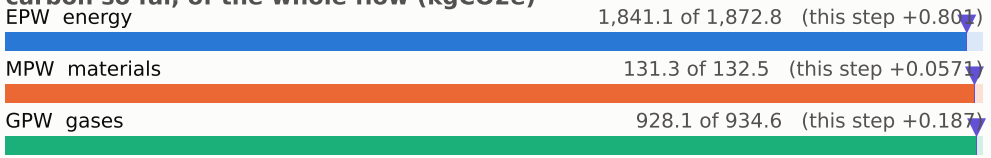

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

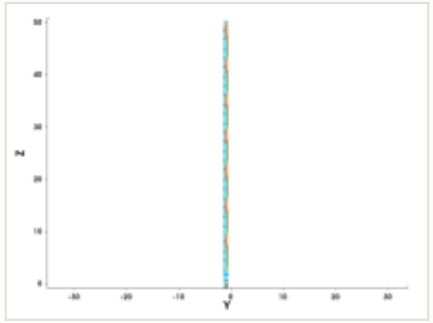

y cut at -1.035 µm

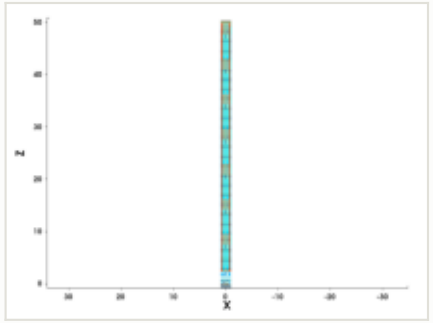

mask for this step

no mask for this step

steps by process area

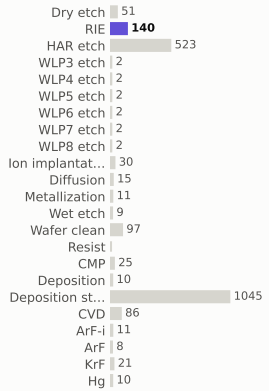

materials deposited (g)

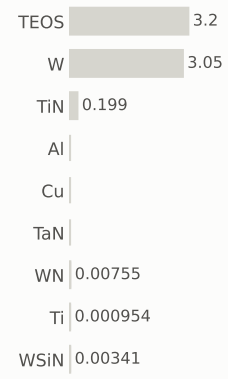

gases emitted (g)

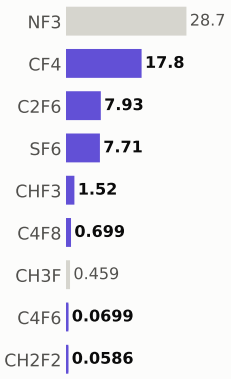

Step #26560: RIE

etch_anisotropic · RIE

1.04	2,901.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

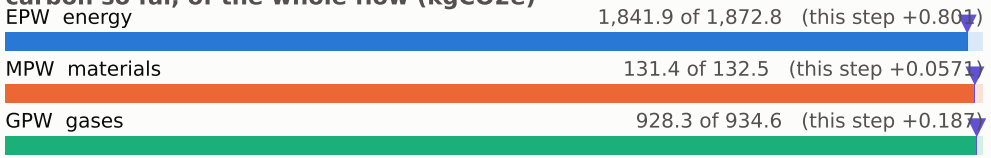

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

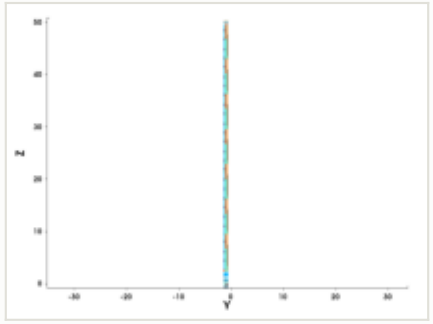

y cut at -1.035 µm

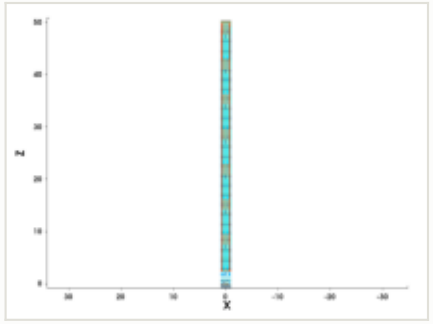

mask for this step

no mask for this step

steps by process area

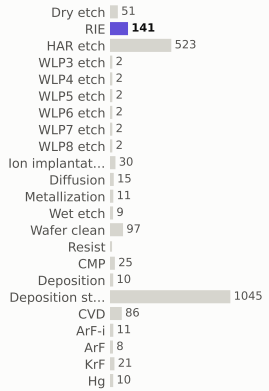

materials deposited (g)

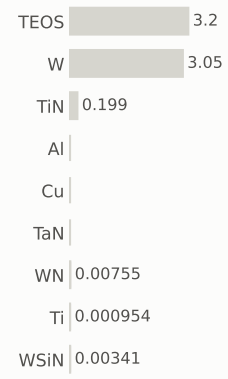

gases emitted (g)

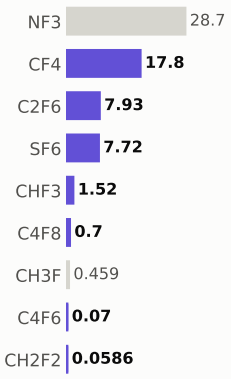

Step #26570: Resist

depo_sog · Resist

0.169	2,901.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.15 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

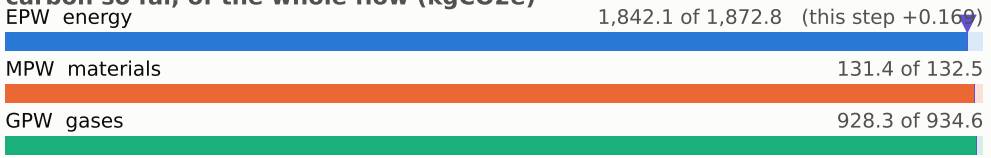

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

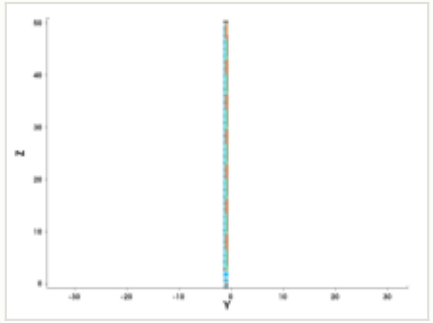

y cut at -1.035 µm

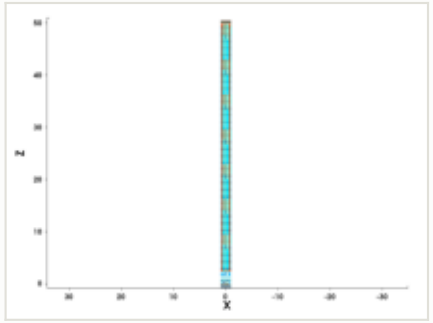

mask for this step

no mask for this step

steps by process area

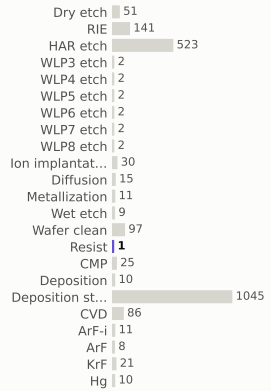

materials deposited (g)

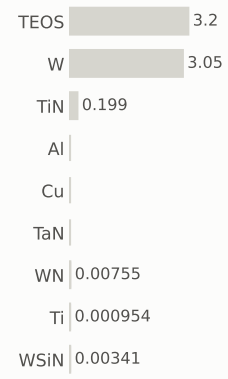

gases emitted (g)

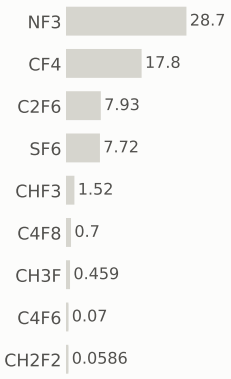

Step #26580: CVD

depo_isotropic · CVD

1.31	2,903.1	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

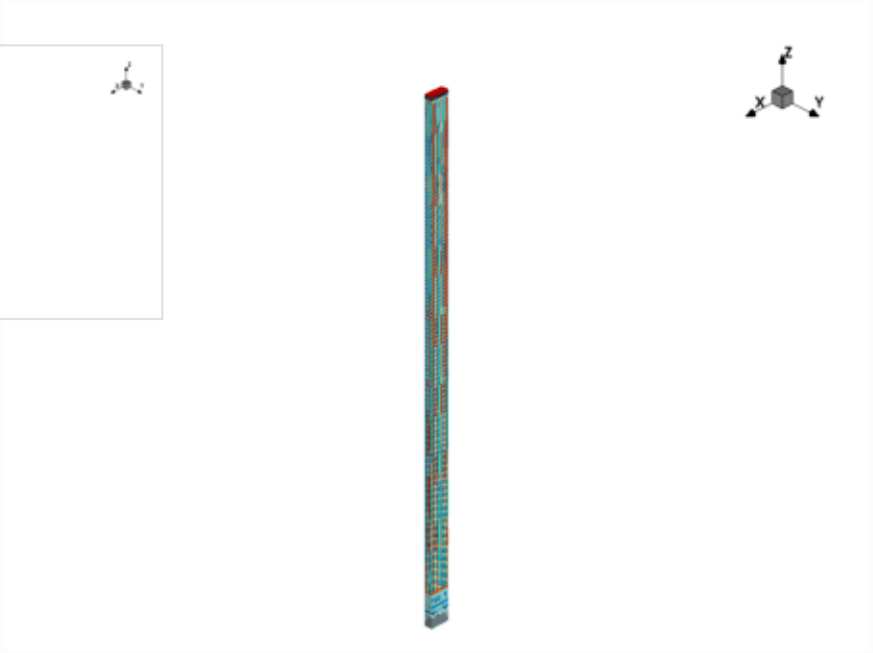

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

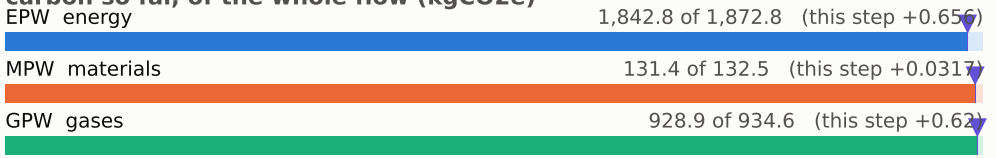

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

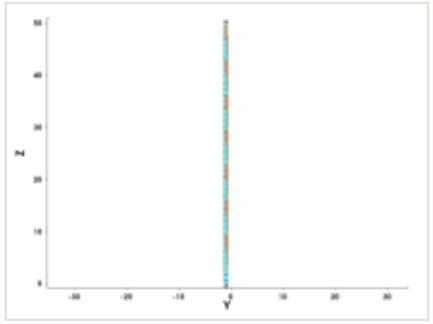

y cut at -1.035 µm

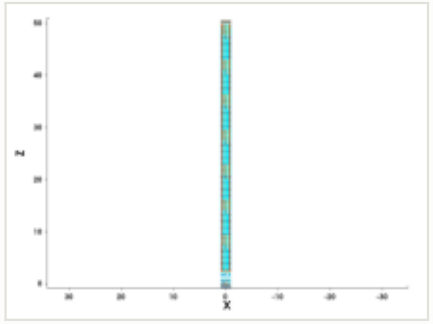

mask for this step

no mask for this step

steps by process area

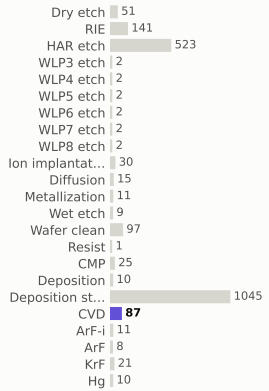

materials deposited (g)

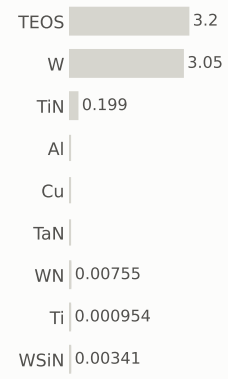

gases emitted (g)

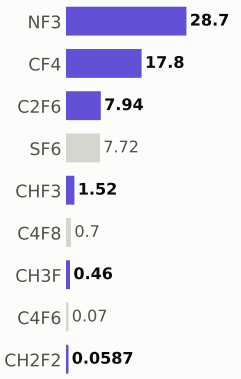

Step #26590: Wafer_clean

clean · Wafer_clean

0.169	2,903.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

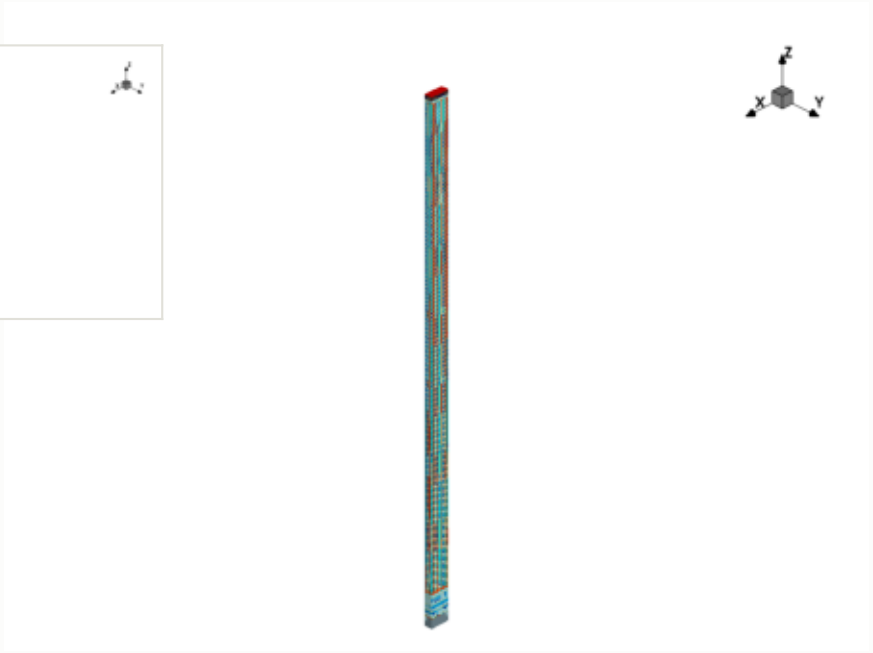

x cut at 0.000 µm

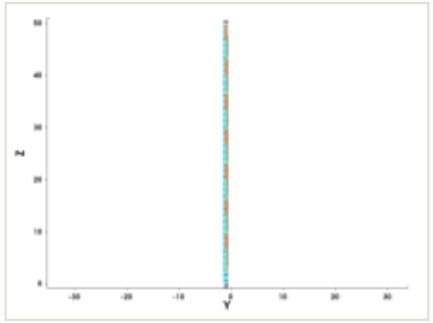

y cut at -1.035 µm

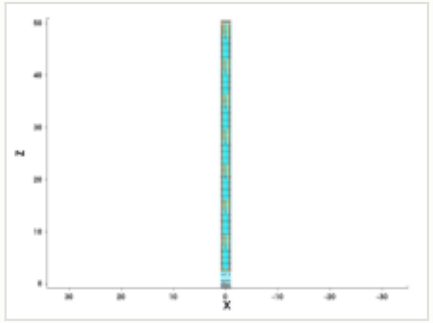

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

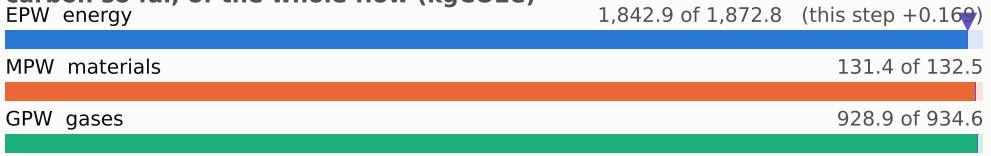

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

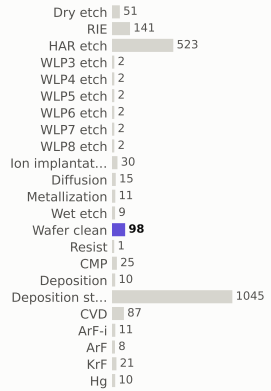

materials deposited (g)

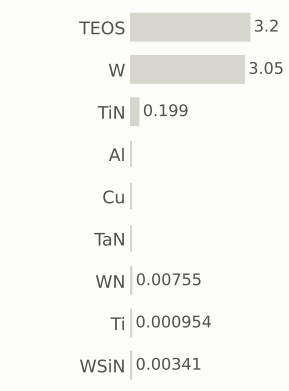

gases emitted (g)

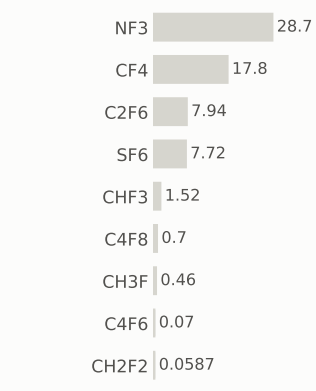

Step #26600: ArF-i

litho_patterning · ArF-i

0.217	2,903.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

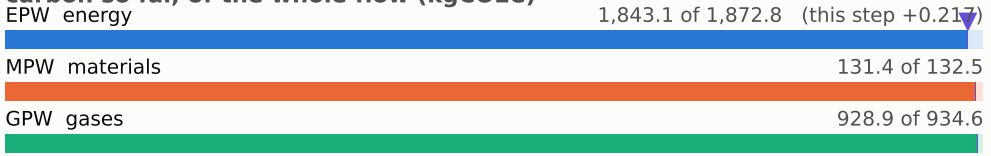

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

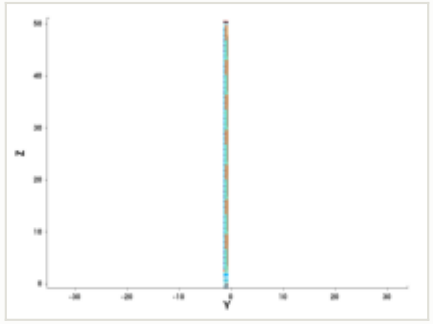

y cut at -1.035 µm

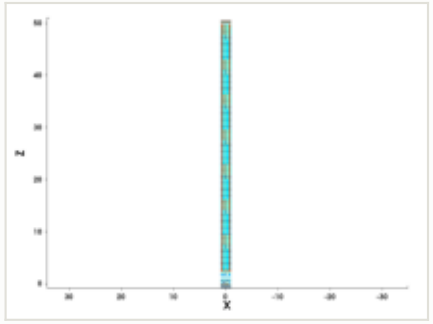

mask: layer 44:0 (OASIS)

steps by process area

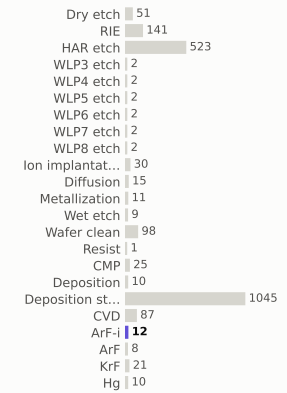

materials deposited (g)

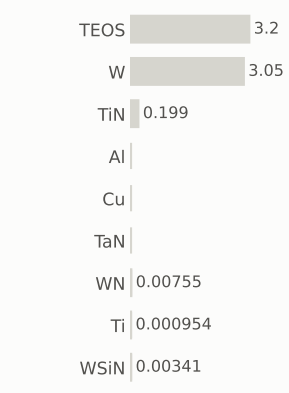

gases emitted (g)

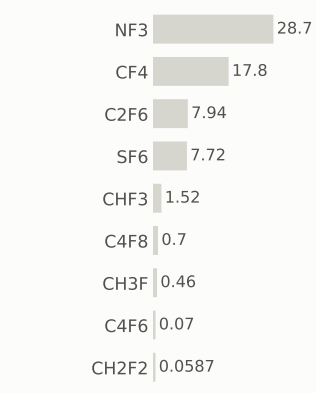

Step #26610: RIE

etch_anisotropic · RIE

1.04	2,904.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

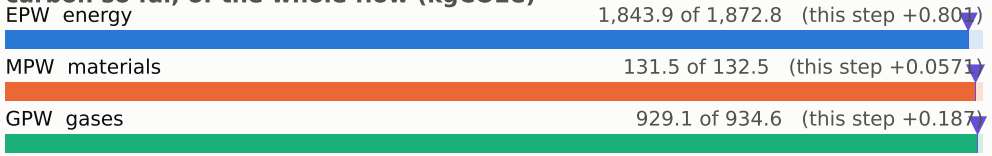

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

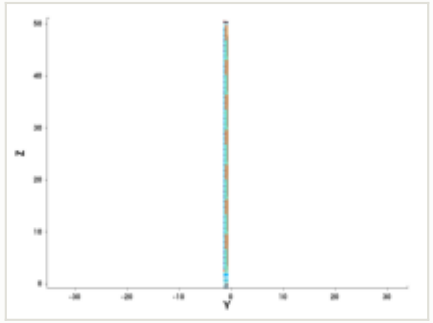

y cut at -1.035 µm

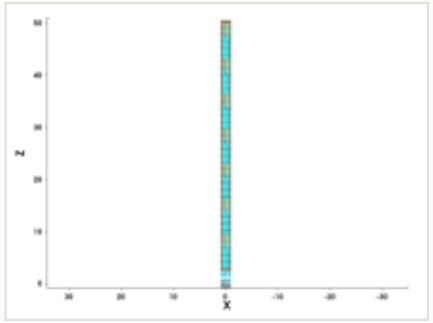

mask for this step

no mask for this step

steps by process area

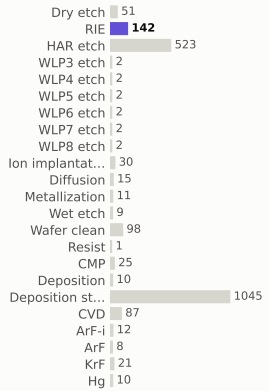

materials deposited (g)

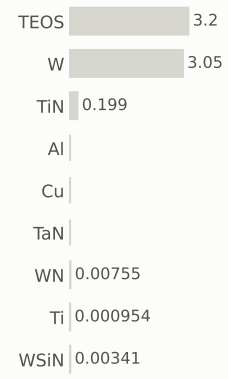

gases emitted (g)

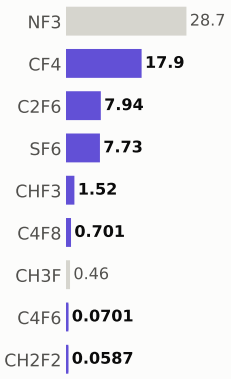

Step #26620: RIE

etch_anisotropic · RIE

1.04	2,905.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

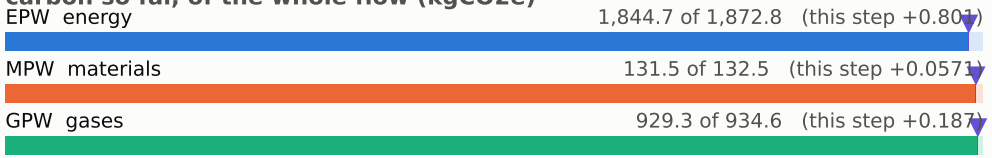

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

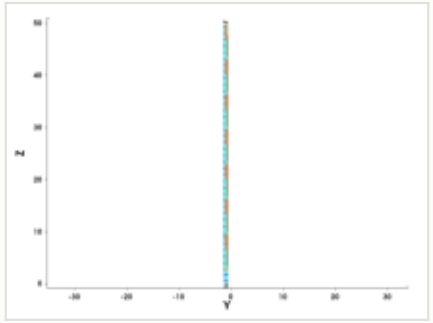

y cut at -1.035 µm

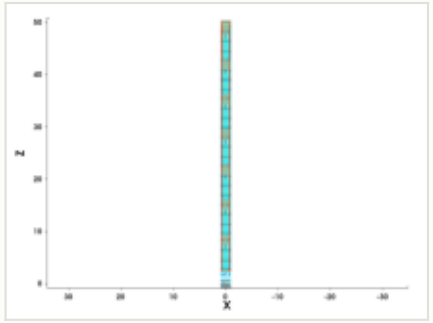

mask for this step

no mask for this step

steps by process area

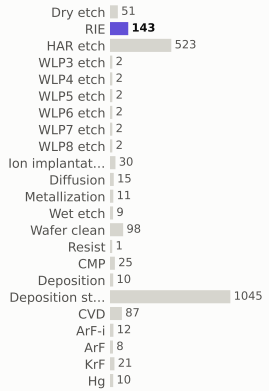

materials deposited (g)



gases emitted (g)

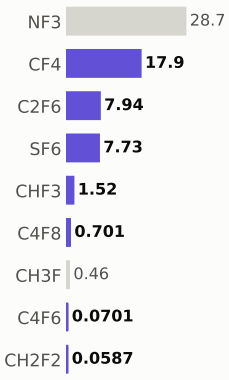

Step #26630: RIE

etch_anisotropic · RIE

1.04	2,906.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

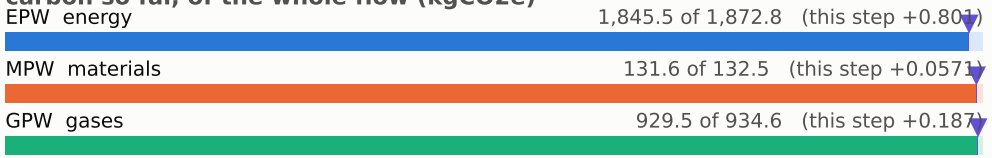

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

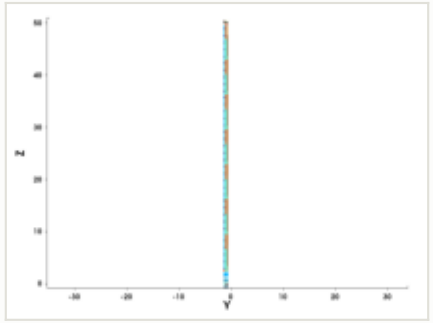

y cut at -1.035 µm

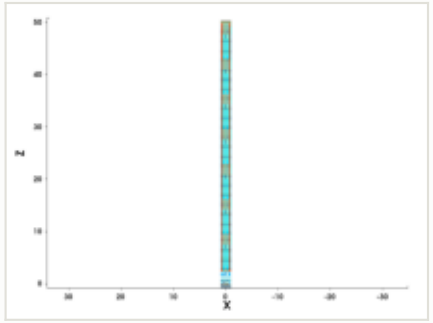

mask for this step

no mask for this step

steps by process area

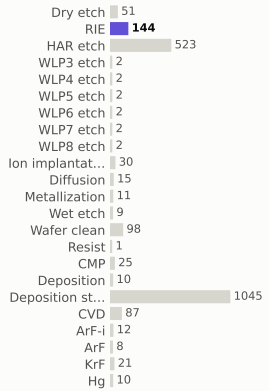

materials deposited (g)

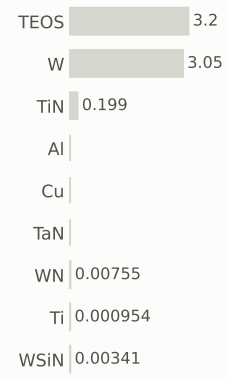

gases emitted (g)

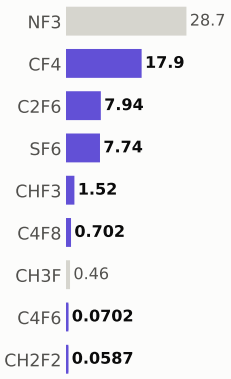

Step #26640: RIE

etch_anisotropic · RIE

1.04	2,907.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

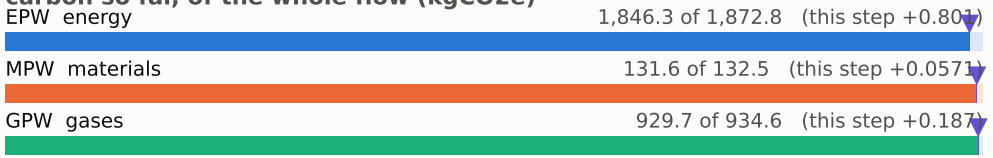

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

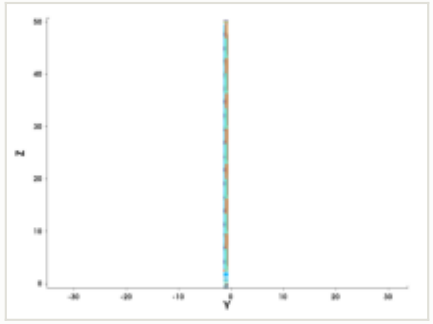

y cut at -1.035 µm

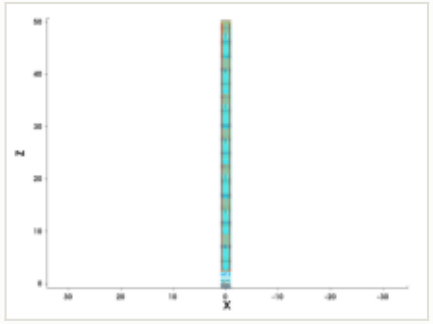

mask for this step

no mask for this step

steps by process area

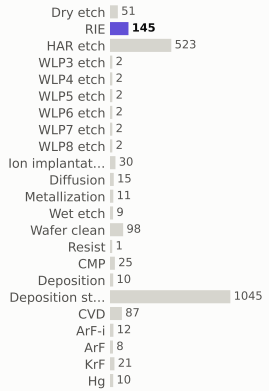

materials deposited (g)

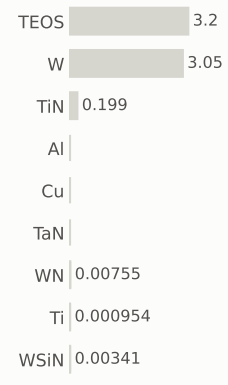

gases emitted (g)

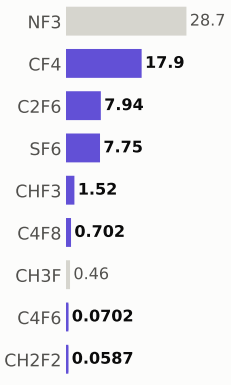

Step #26650: RIE

etch_anisotropic · RIE

1.04	2,908.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

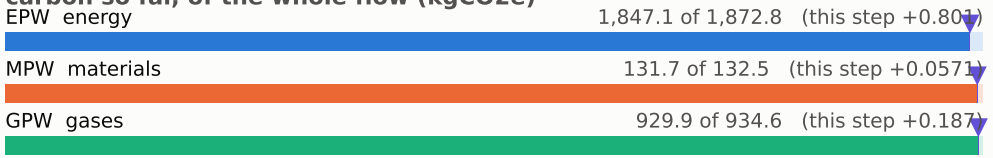

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

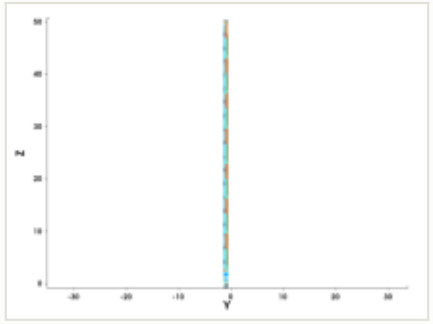

y cut at -1.035 µm

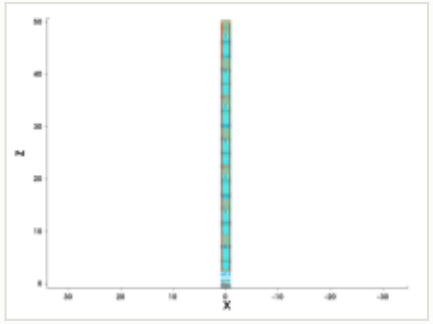

mask for this step

no mask for this step

steps by process area

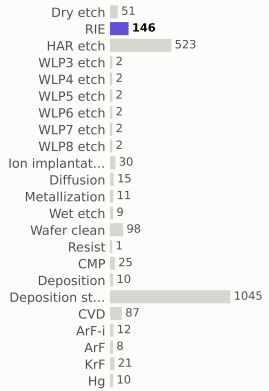

materials deposited (g)

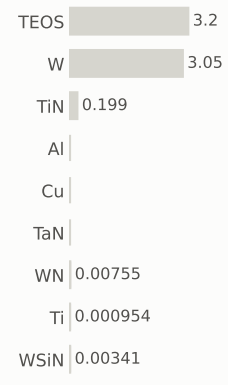

gases emitted (g)

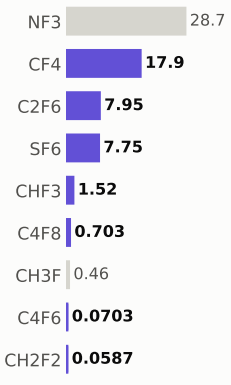

Step #26660: RIE

etch_anisotropic · RIE

1.04	2,909.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

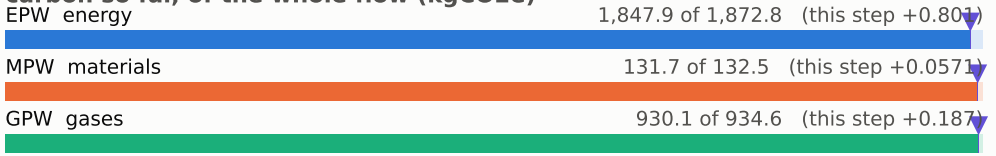

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

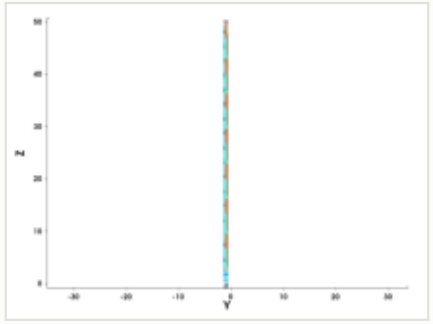

y cut at -1.035 µm

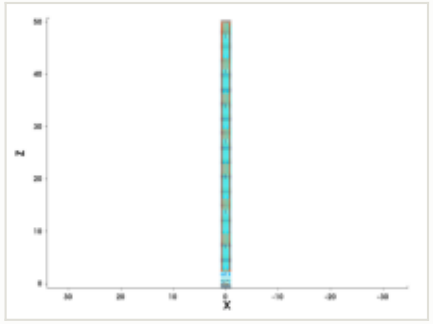

mask for this step

no mask for this step

steps by process area

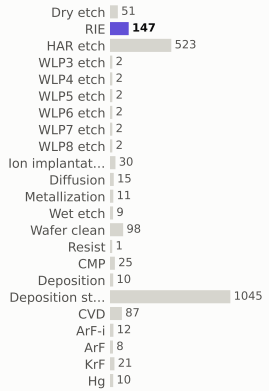

materials deposited (g)

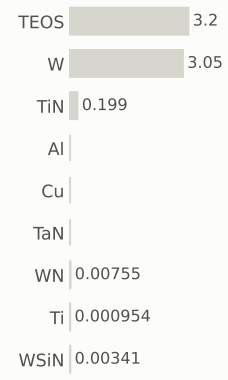

gases emitted (g)



Step #26670: RIE

etch_anisotropic · RIE

1.04	2,910.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

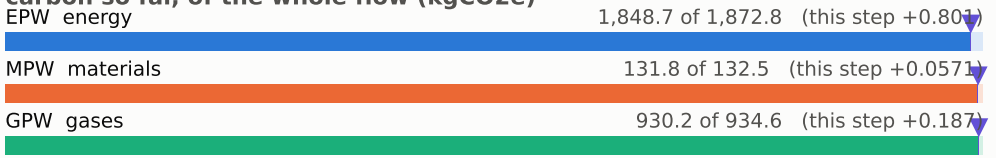

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

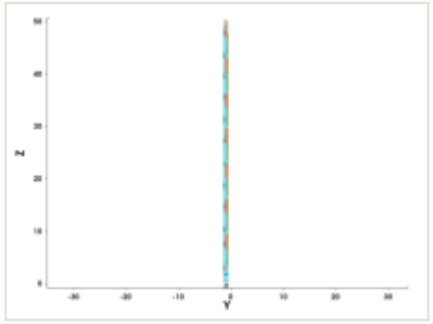

y cut at -1.035 µm

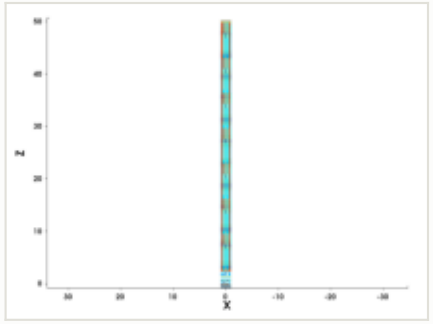

mask for this step

no mask for this step

steps by process area

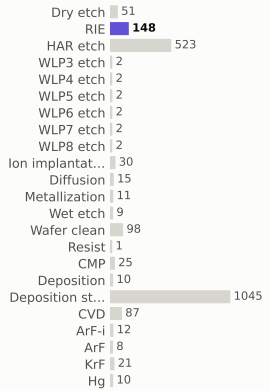

materials deposited (g)

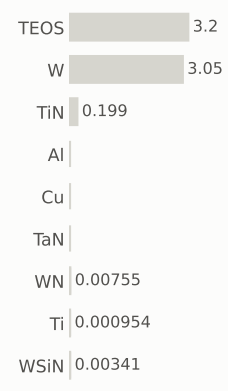

gases emitted (g)

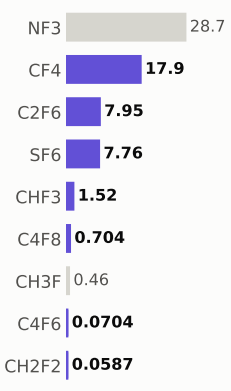

Step #26680: RIE

etch_anisotropic · RIE

1.04	2,911.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

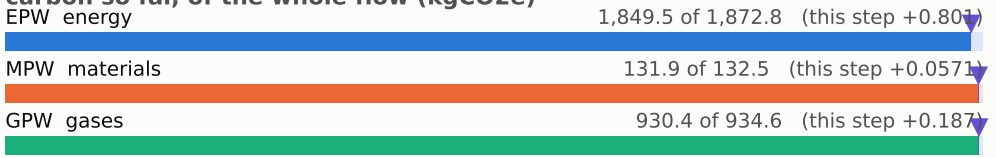

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

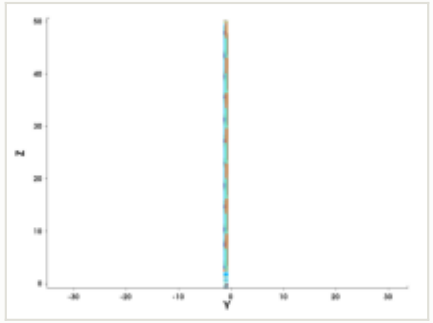

y cut at -1.035 µm

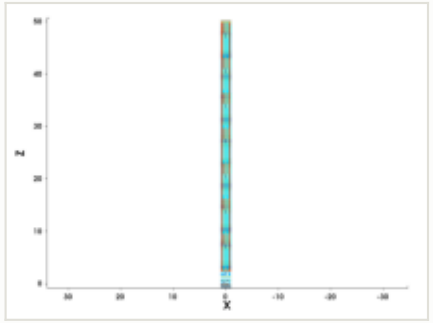

mask for this step

no mask for this step

steps by process area

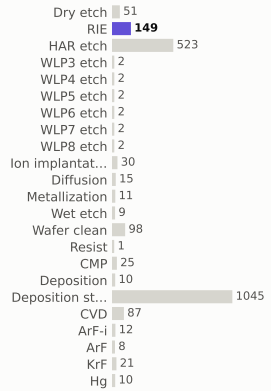

materials deposited (g)

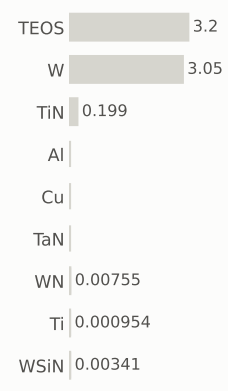

gases emitted (g)

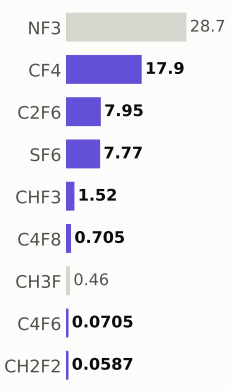

Step #26690: RIE

etch_anisotropic · RIE

1.04	2,912.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

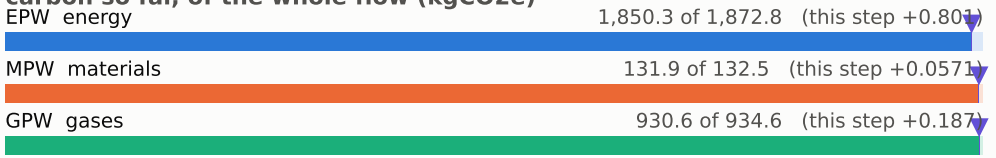

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

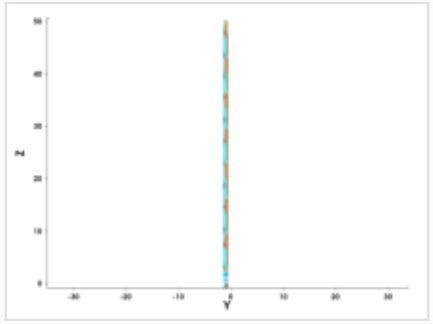

y cut at -1.035 µm

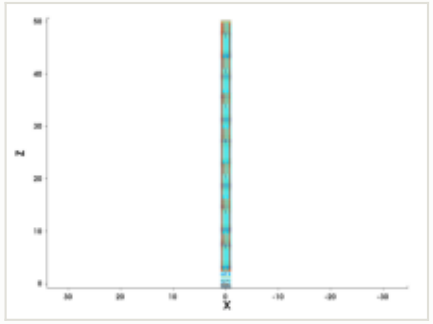

mask for this step

no mask for this step

steps by process area

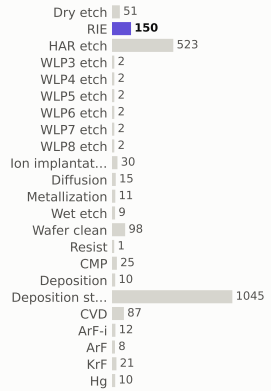

materials deposited (g)



gases emitted (g)

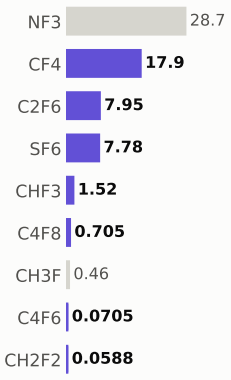

Step #26700: Dry_etch

etch_strip · Dry_etch

0.801	2,913.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

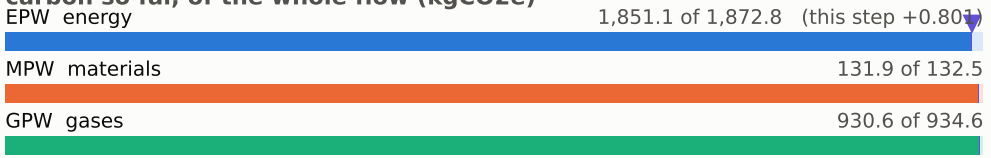

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

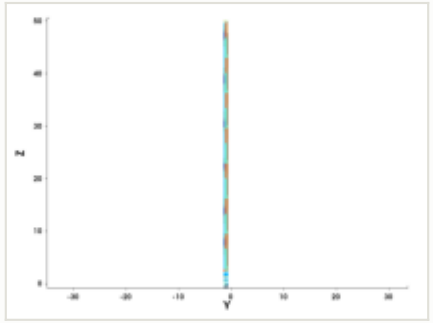

y cut at -1.035 µm

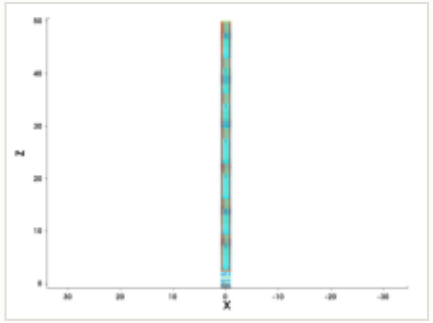

mask for this step

no mask for this step

steps by process area

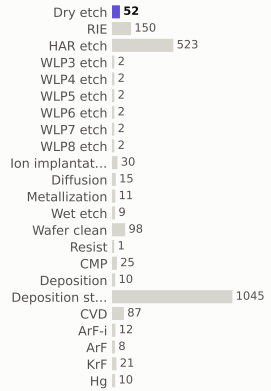

materials deposited (g)

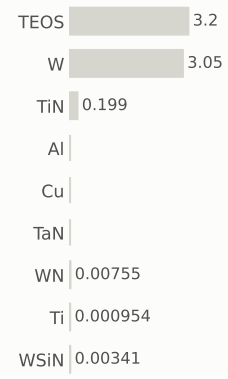

gases emitted (g)

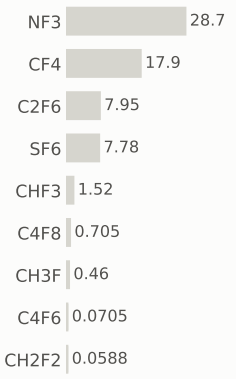

Step #26710: Wafer_clean

clean · Wafer_clean

0.169	2,913.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

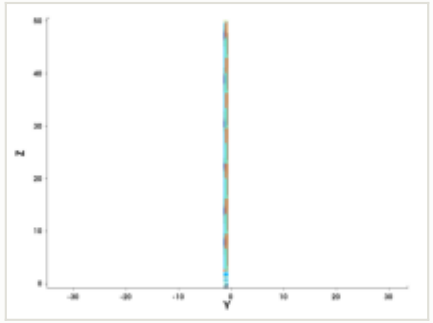

y cut at -1.035 µm

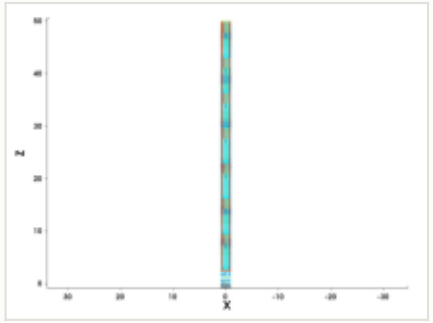

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

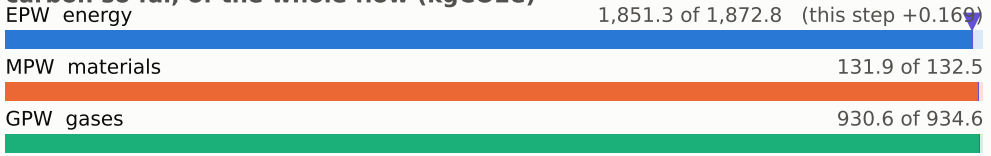

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

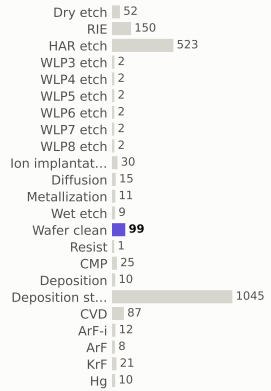

materials deposited (g)

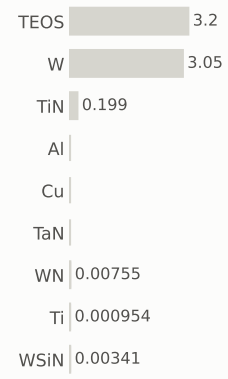

gases emitted (g)

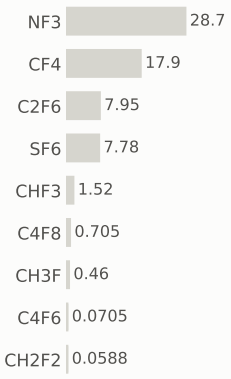

Step #26720: Deposition

depo_ellipsoidal · Deposition

0.656	2,914.5	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

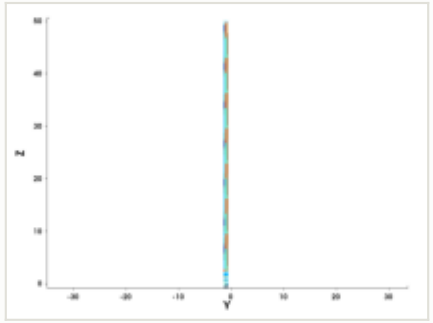

y cut at -1.035 µm

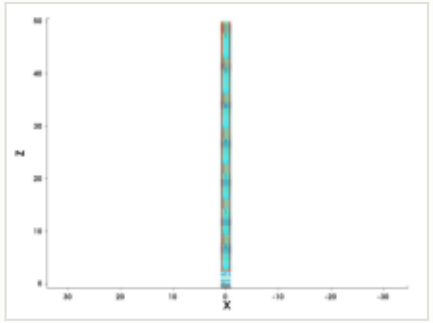

mask for this step

no mask for this step

this step

process area	Deposition
material	TaN
thickness	0.01 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.00025 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

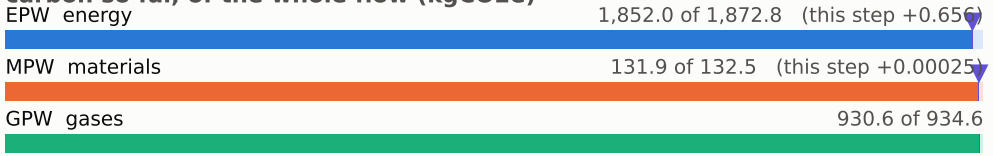

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

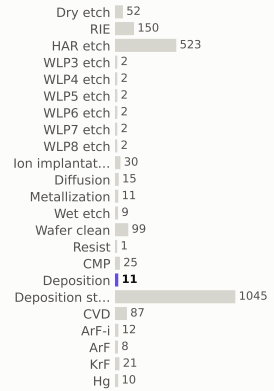

materials deposited (g)

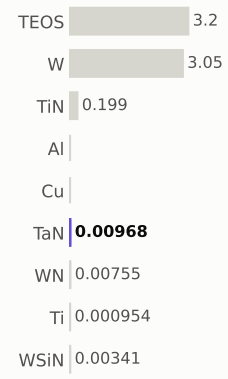

gases emitted (g)

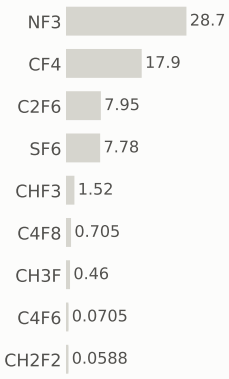

Step #26730: Metallization

depo_isotropic · Metallization

1.2	2,915.7	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

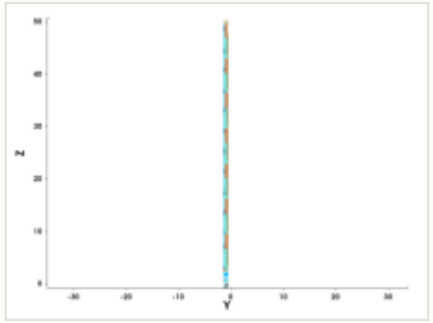

y cut at -1.035 µm

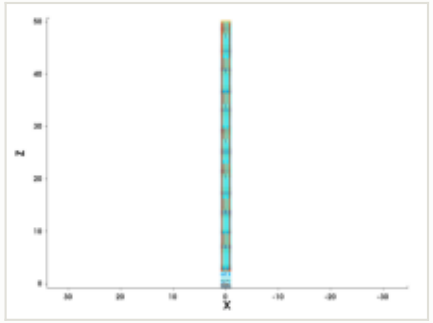

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.07 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00027 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

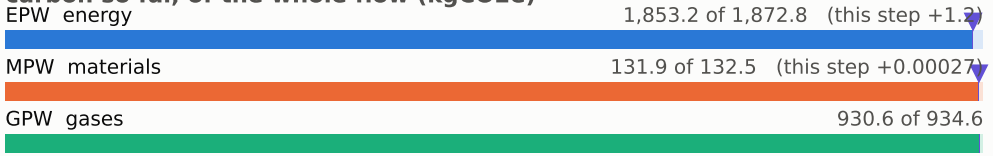

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

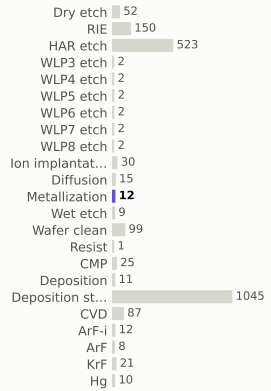

materials deposited (g)



gases emitted (g)

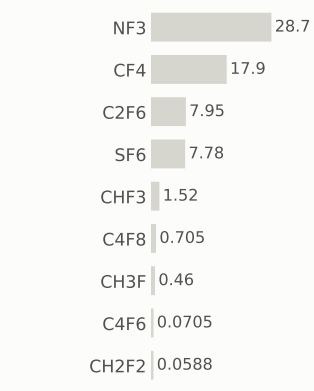

Step #26740: Diffusion

anneal · Diffusion

0.801	2,916.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

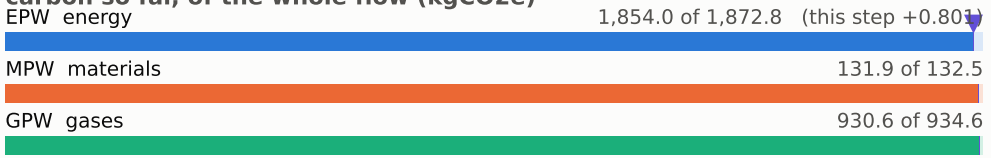

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

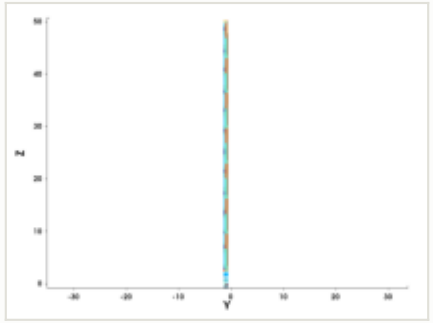

y cut at -1.035 µm

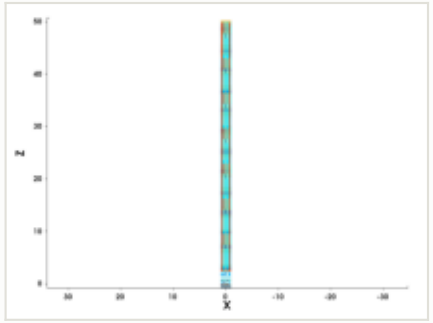

mask for this step

no mask for this step

steps by process area

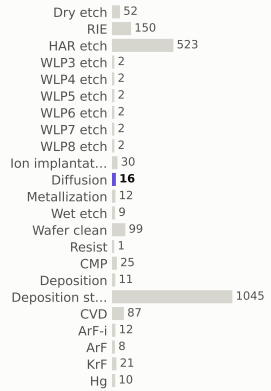

materials deposited (g)

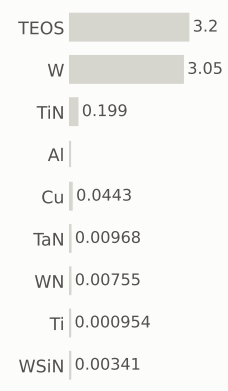

gases emitted (g)

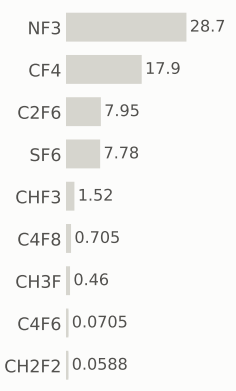

Step #26750: CMP

etch_cmp · CMP

0.169	2,916.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

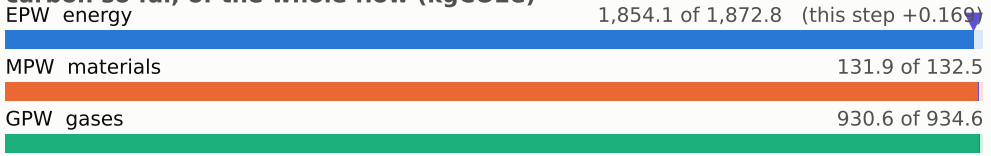

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

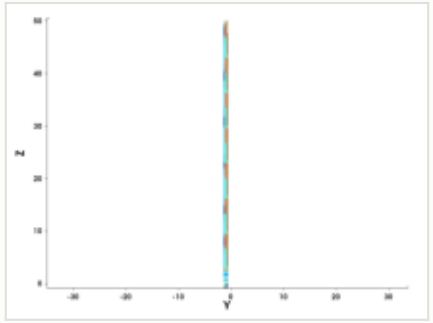

y cut at -1.035 µm

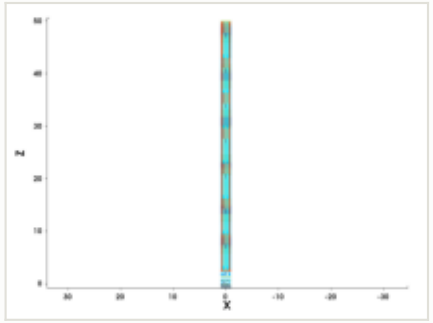

mask for this step

no mask for this step

steps by process area

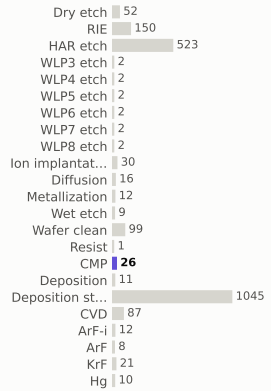

materials deposited (g)

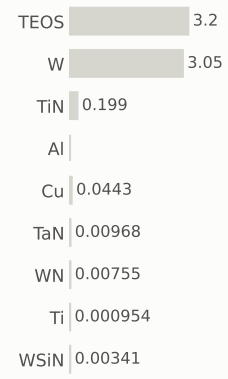

gases emitted (g)

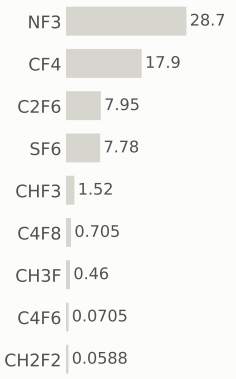

Step #26760: Wafer_clean

clean · Wafer_clean

0.169	2,916.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

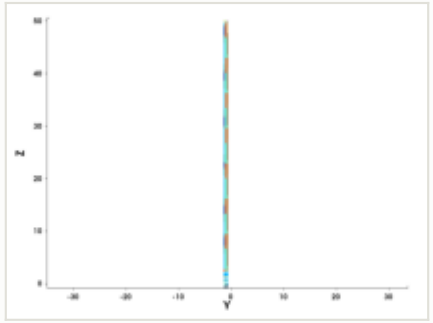

y cut at -1.035 µm

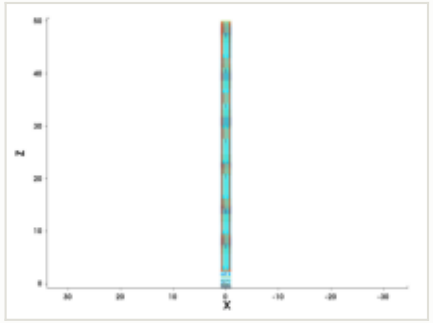

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

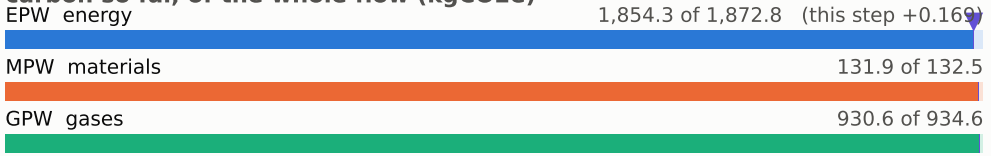

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

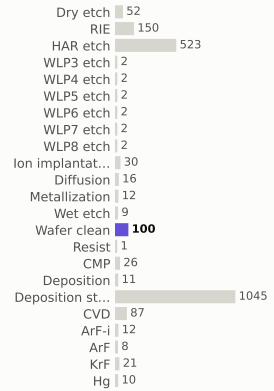

materials deposited (g)

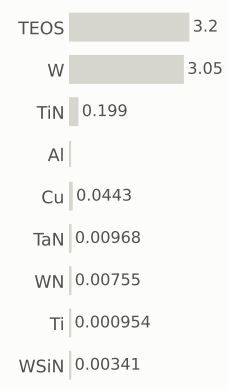

gases emitted (g)

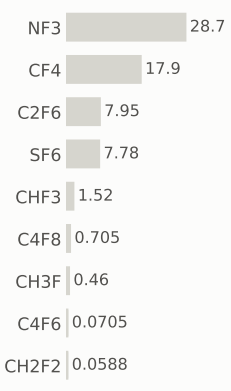

Step #26780: CVD

depo_isotropic · CVD

1.31	2,918.2	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.075 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

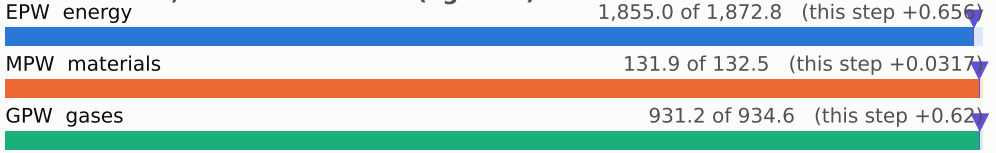

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

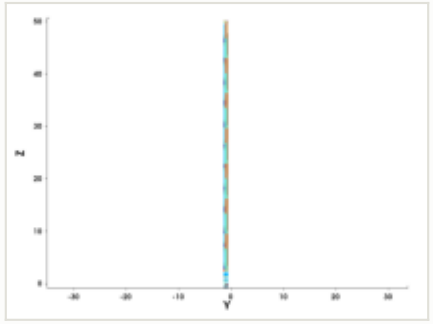

y cut at -1.035 µm

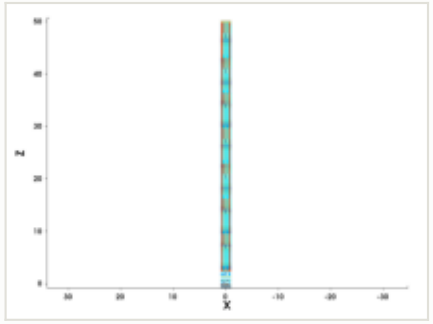

mask for this step

no mask for this step

steps by process area

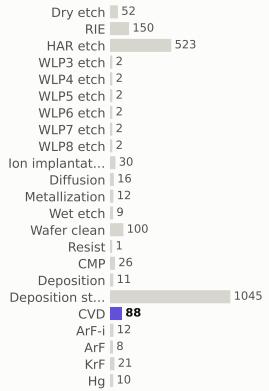

materials deposited (g)



gases emitted (g)

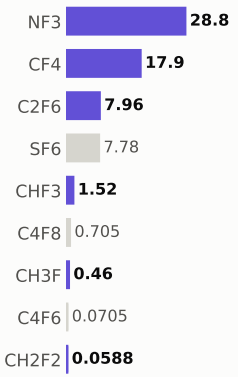

Step #26790: CVD

depo_isotropic · CVD

1.31	2,919.5	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

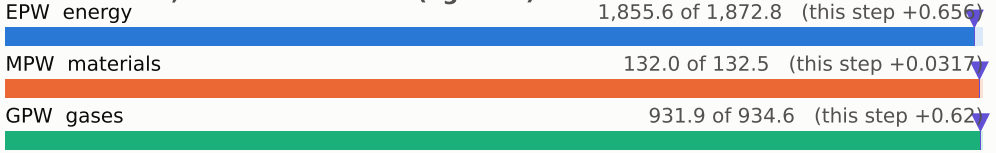

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

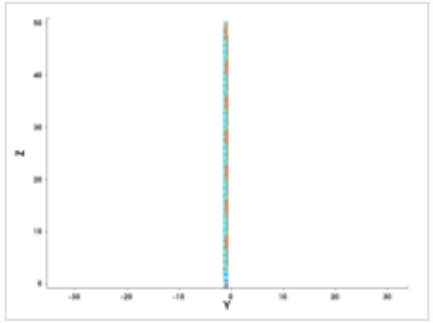

y cut at -1.035 µm

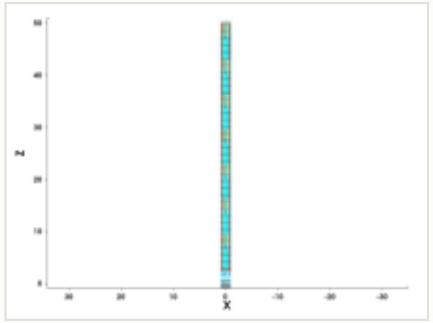

mask for this step

no mask for this step

steps by process area

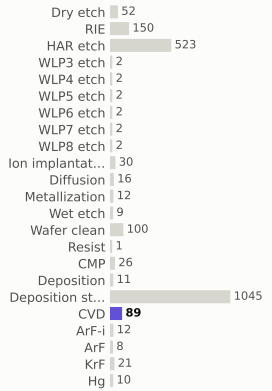

materials deposited (g)



gases emitted (g)



Step #26800: ArF

litho_patterning · ArF

0.199	2,919.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

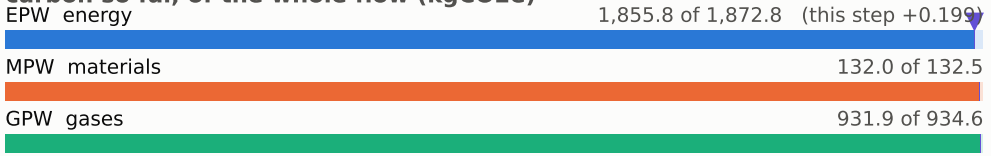

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

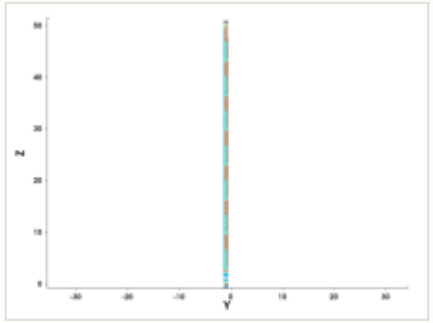

y cut at -1.035 µm

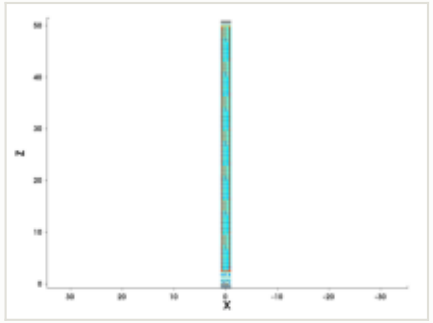

mask: layer 45:0, positive (OASIS)

steps by process area

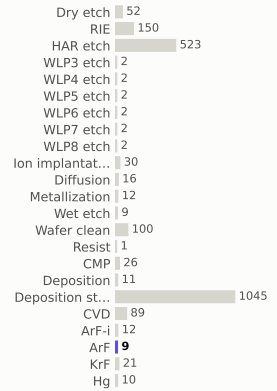

materials deposited (g)

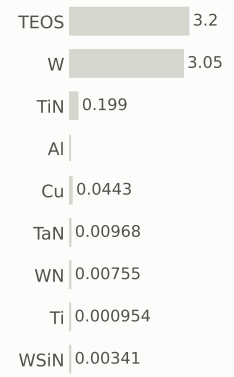

gases emitted (g)

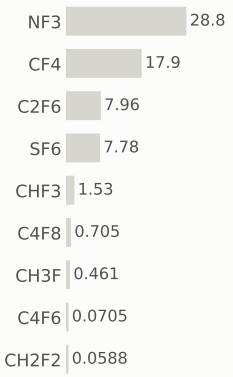

Step #26810: RIE

etch_anisotropic · RIE

1.04	2,920.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

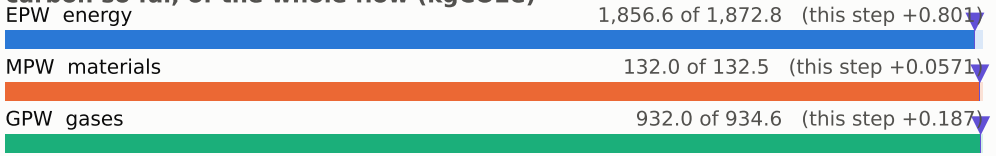

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

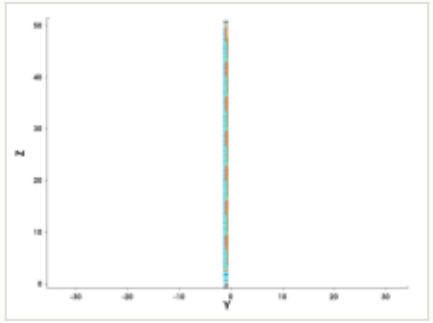

y cut at -1.035 µm

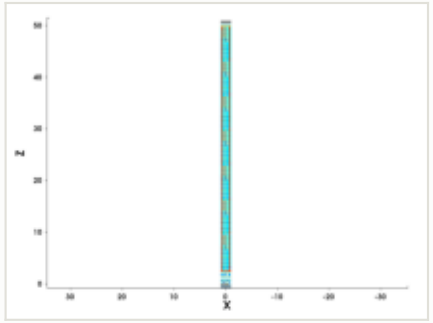

mask for this step

no mask for this step

steps by process area

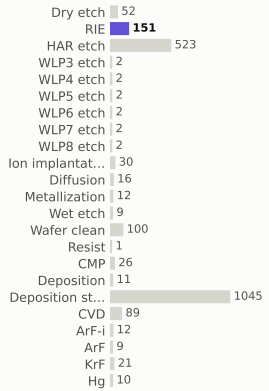

materials deposited (g)

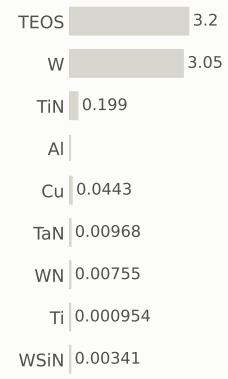

gases emitted (g)

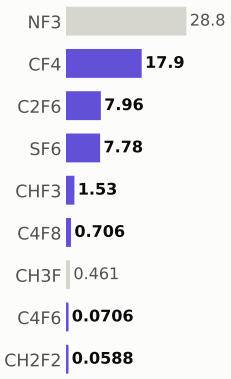

Step #26820: RIE

etch_anisotropic · RIE

1.04	2,921.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

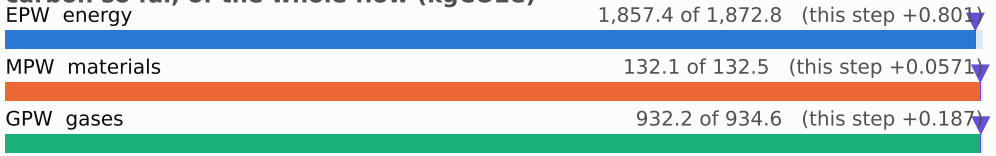

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

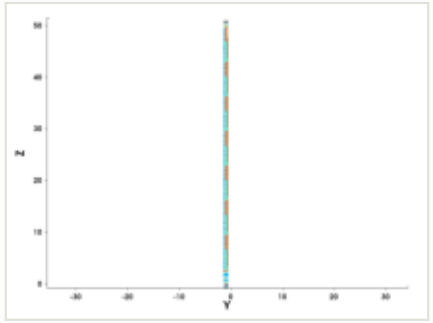

y cut at -1.035 µm

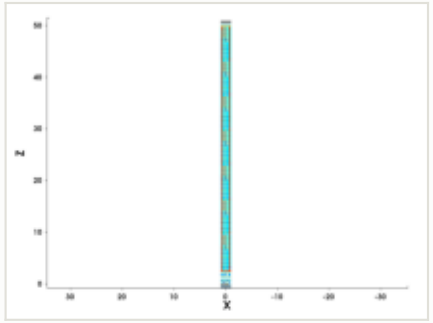

mask for this step

no mask for this step

steps by process area

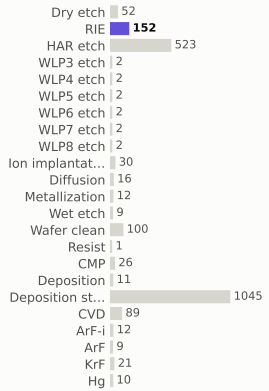

materials deposited (g)

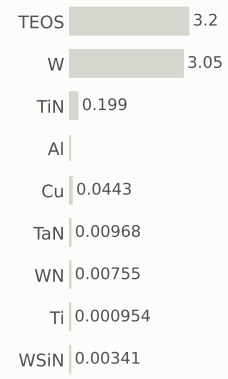

gases emitted (g)

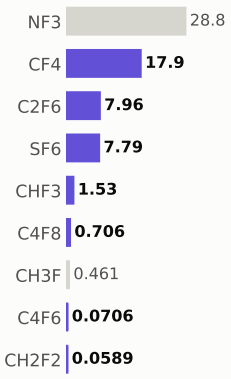

Step #26830: Dry_etch

etch_strip · Dry_etch

0.801	2,922.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

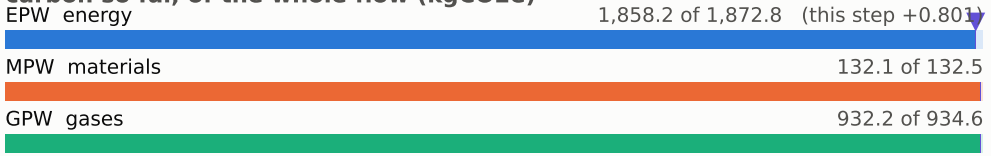

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

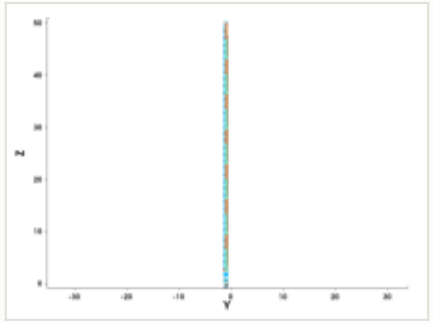

y cut at -1.035 µm

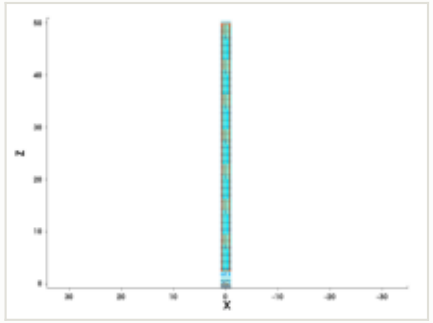

mask for this step

no mask for this step

steps by process area

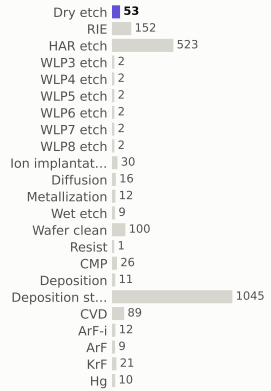

materials deposited (g)

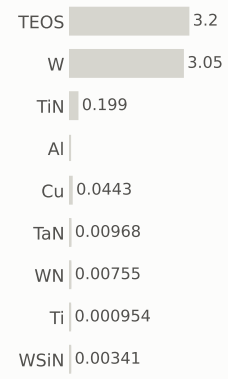

gases emitted (g)

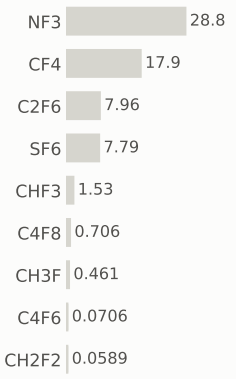

Step #26840: Wafer_clean

clean · Wafer_clean

0.169	2,922.7	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

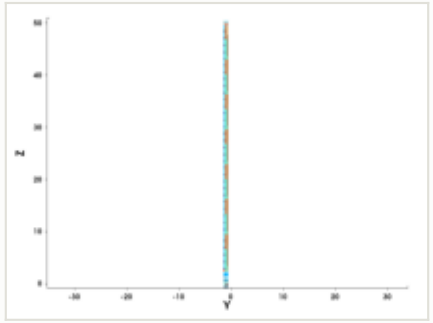

y cut at -1.035 µm

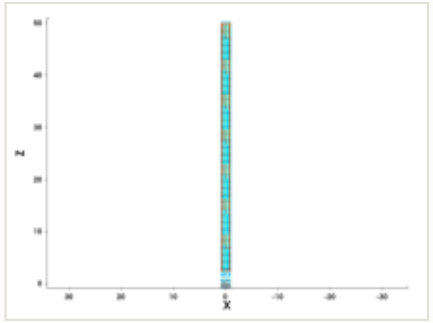

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

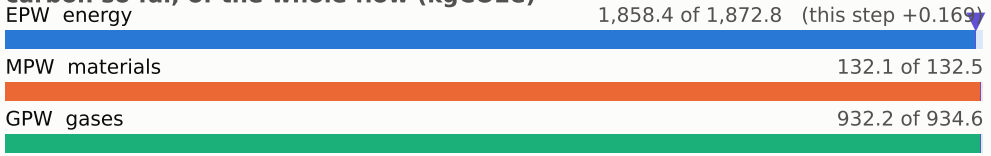

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

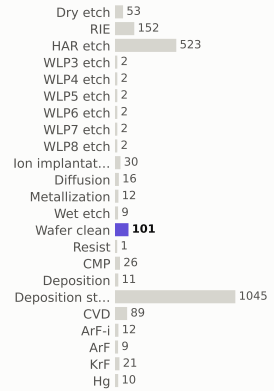

materials deposited (g)

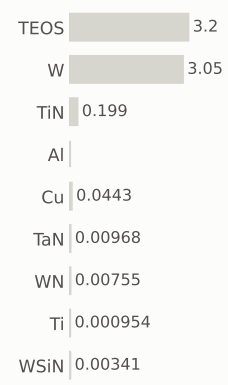

gases emitted (g)



Step #26850: CVD

depo_isotropic · CVD

1.31	2,924.0	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

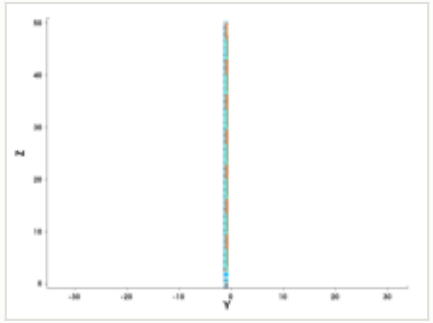

y cut at -1.035 µm

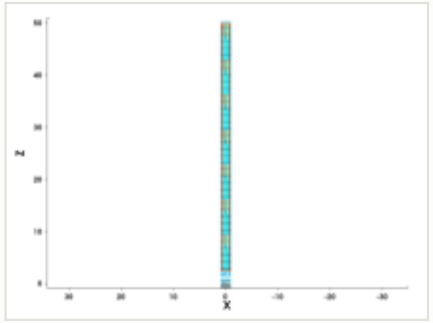

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.005 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

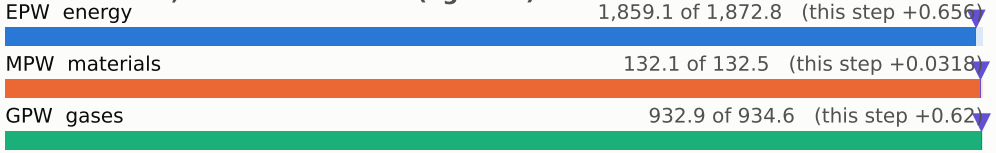

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

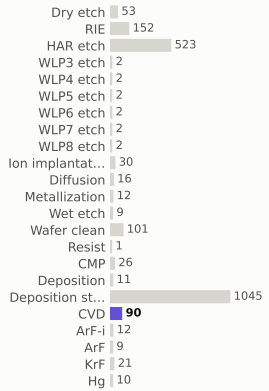

materials deposited (g)

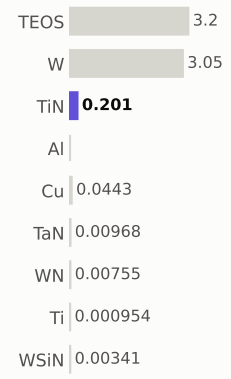

gases emitted (g)

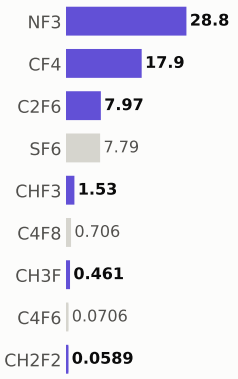

Step #26860: Metallization

depo_isotropic · Metallization

1.21	2,925.2	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

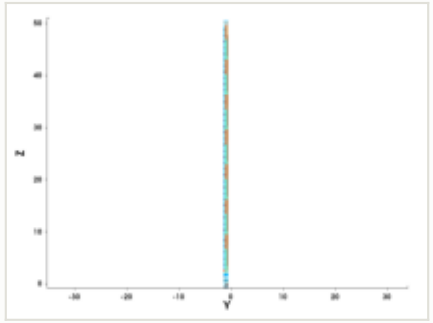

y cut at -1.035 µm

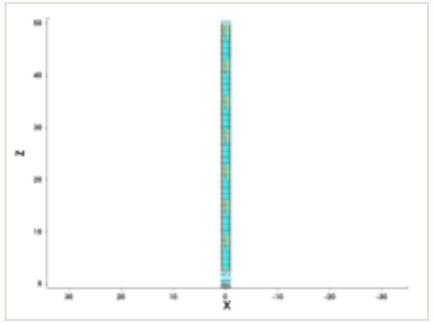

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

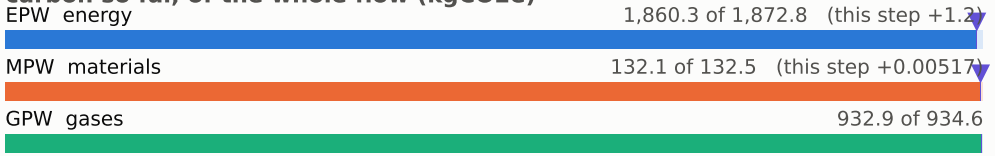

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

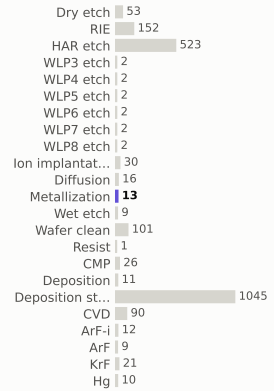

materials deposited (g)

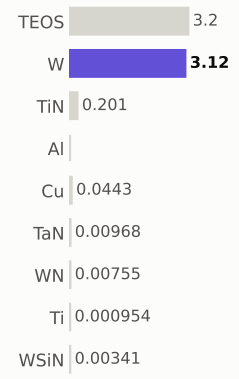

gases emitted (g)

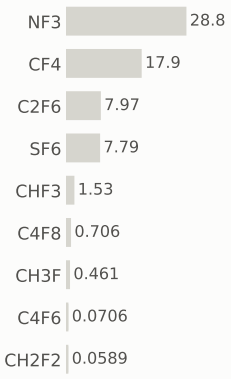

Step #26870: CMP

etch_cmp · CMP

0.169	2,925.4	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

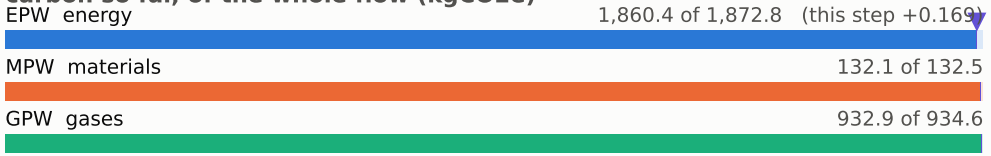

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

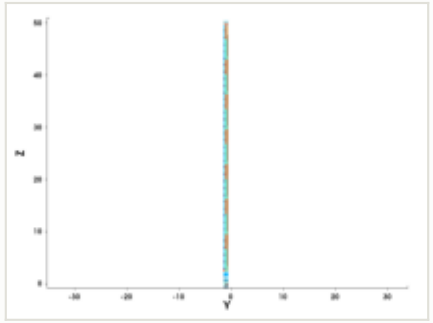

y cut at -1.035 µm

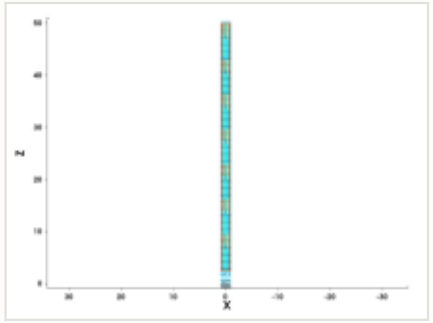

mask for this step

no mask for this step

steps by process area

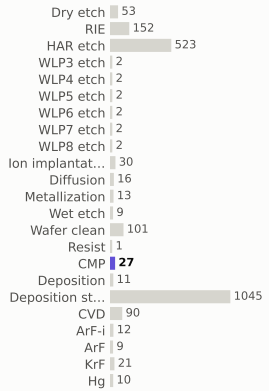

materials deposited (g)



gases emitted (g)

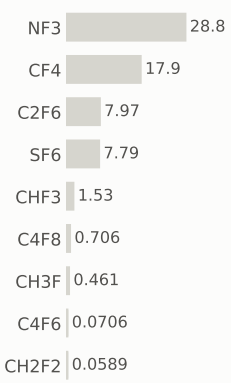

Step #26880: Wafer_clean

clean · Wafer_clean

0.169	2,925.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

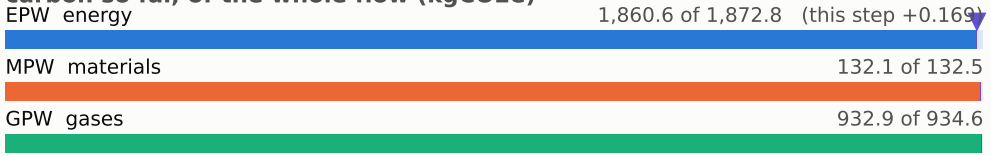

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

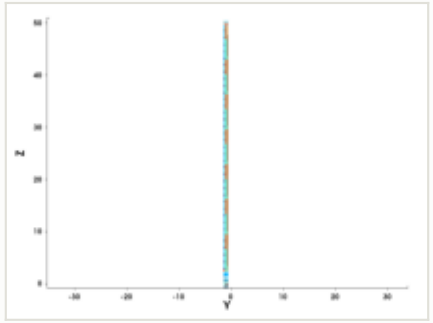

y cut at -1.035 µm

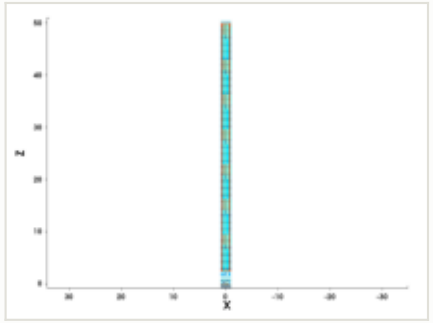

mask for this step

no mask for this step

steps by process area

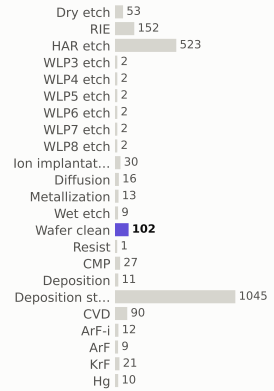

materials deposited (g)



gases emitted (g)

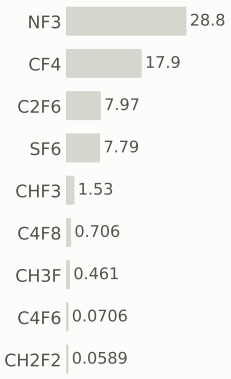

Step #26900: Metallization

depo_isotropic · Metallization

1.2	2,926.8	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Ti	EPW tool	0.86 kgCO2e
thickness	0.01 µm	EPW overhead	0.344 kgCO2e
material GWP	47.6334 gCO2e/g	MPW	0.000152 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

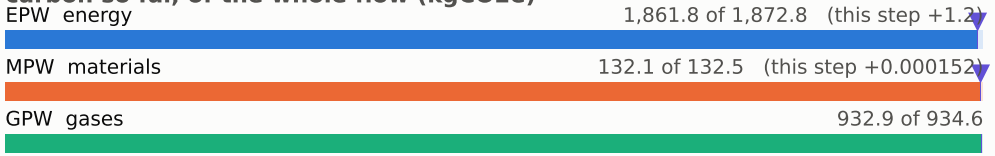

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

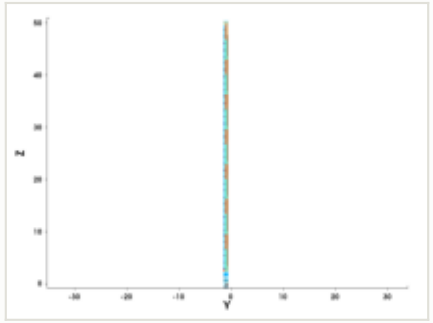

y cut at -1.035 µm

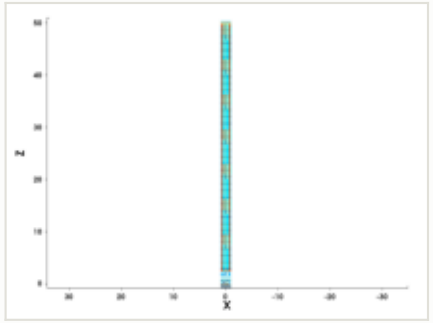

mask for this step

no mask for this step

steps by process area

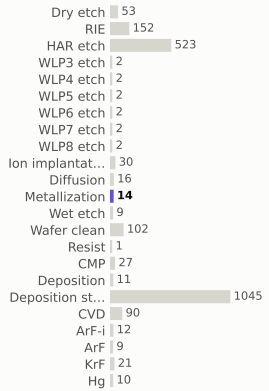

materials deposited (g)

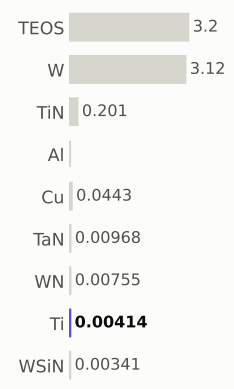

gases emitted (g)

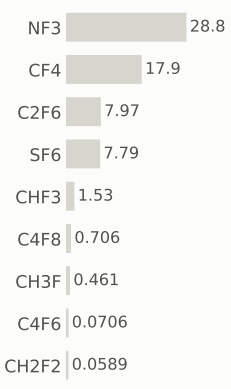

Step #26910: Metallization

depo_isotropic · Metallization

1.21	2,928.0	0.041%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Al	EPW tool	0.86 kgCO2e
thickness	0.635 µm	EPW overhead	0.344 kgCO2e
material GWP	10.7269 gCO2e/g	MPW	0.0013 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

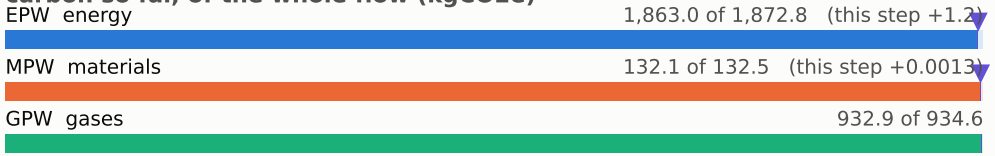

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

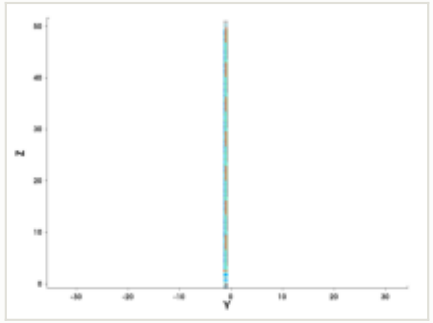

y cut at -1.035 µm

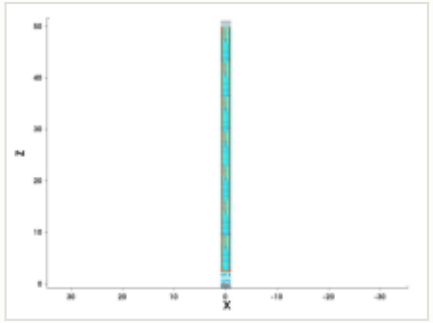

mask for this step

no mask for this step

steps by process area

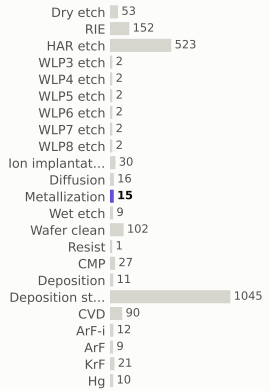

materials deposited (g)



gases emitted (g)

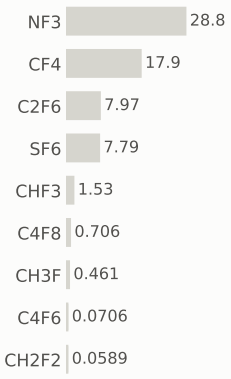

Step #26920: Deposition

depo_isotropic · Deposition

0.657	2,928.6	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.048 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.000777 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

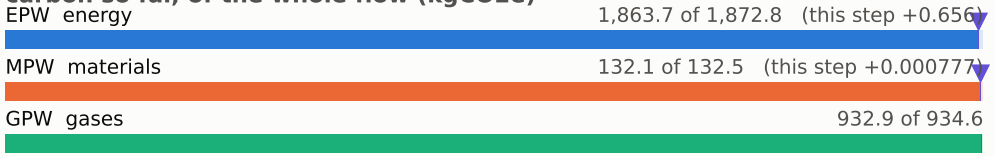

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

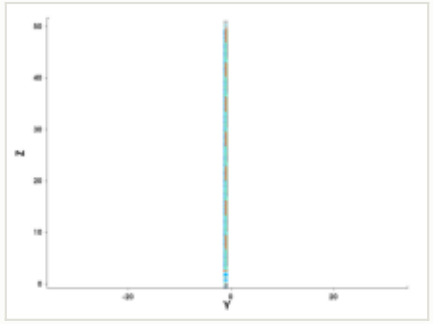

y cut at -1.035 µm

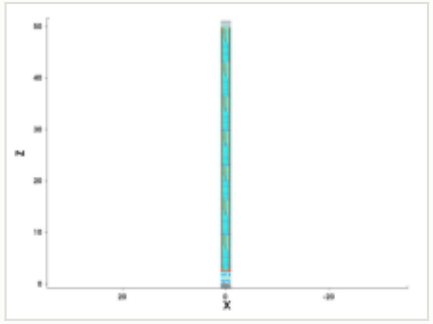

mask for this step

no mask for this step

steps by process area

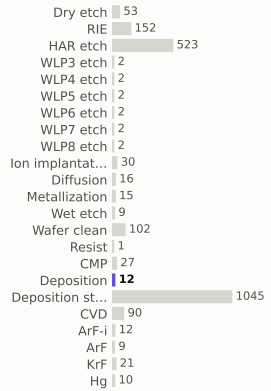

materials deposited (g)



gases emitted (g)

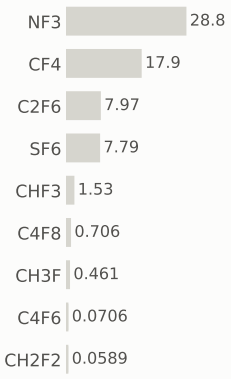

Step #26930: Deposition

depo_isotropic · Deposition

0.656	2,929.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.007 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

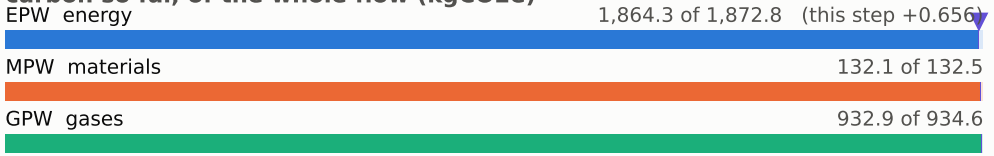

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

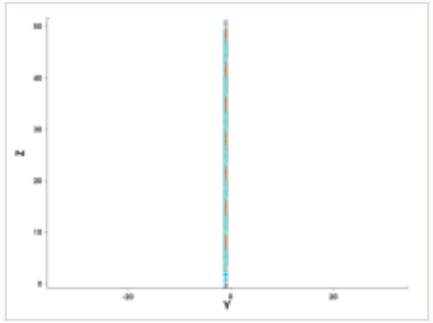

y cut at -1.035 µm

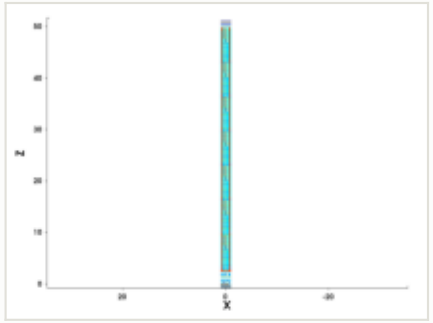

mask for this step

no mask for this step

steps by process area

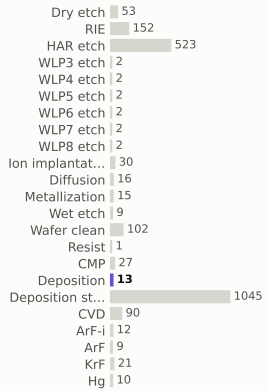

materials deposited (g)

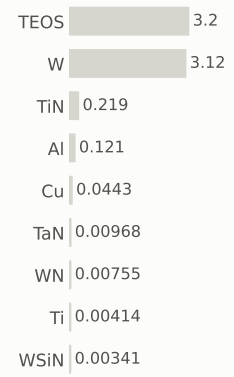

gases emitted (g)

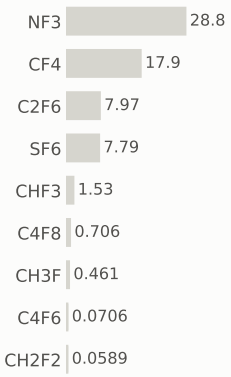

Step #26940: KrF

litho_patterning · KrF

0.199	2,929.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

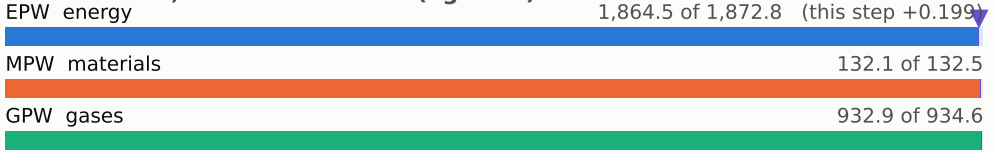

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

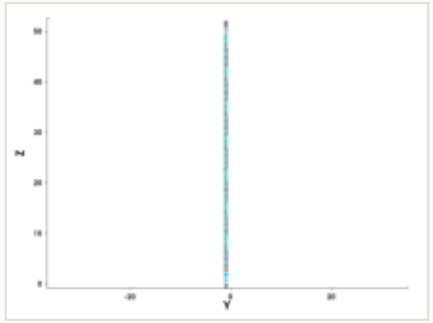

y cut at -1.035 µm

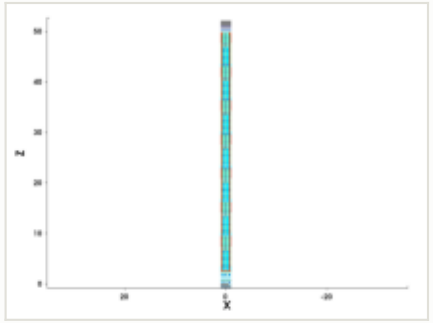

mask: layer 46:0, positive (OASIS)

steps by process area

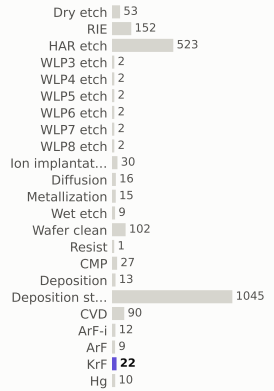

materials deposited (g)

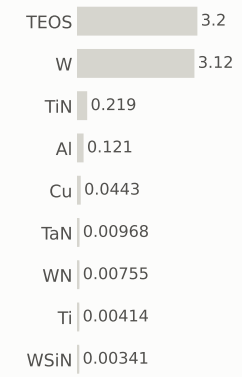

gases emitted (g)

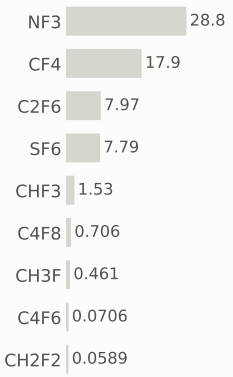

Step #26950: RIE

etch_anisotropic · RIE

1.04	2,930.5	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 1,865.3 of 1,872.8 (this step +0.801)

MPW materials — 132.2 of 132.5 (this step +0.0571)

GPW gases — 933.0 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

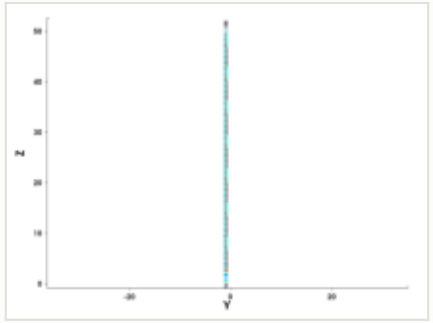

y cut at -1.035 µm

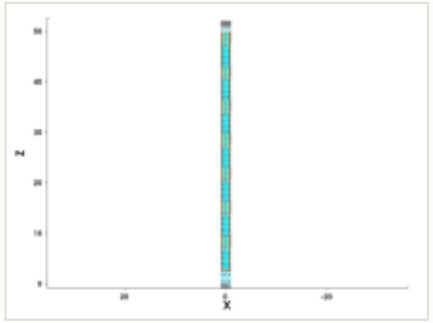

mask for this step

no mask for this step

steps by process area

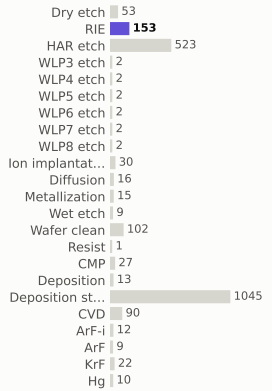

materials deposited (g)



gases emitted (g)

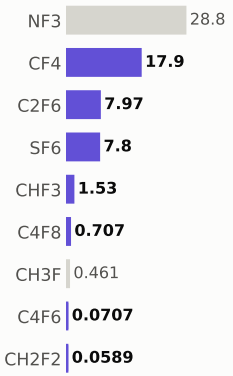

Step #26960: RIE

etch_anisotropic · RIE

1.04	2,931.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

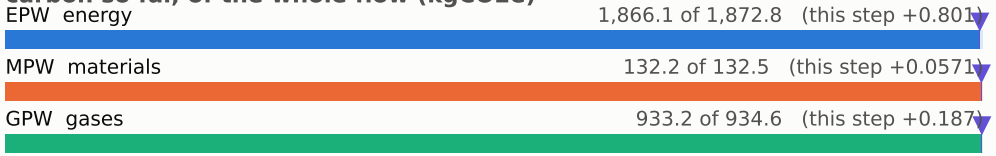

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

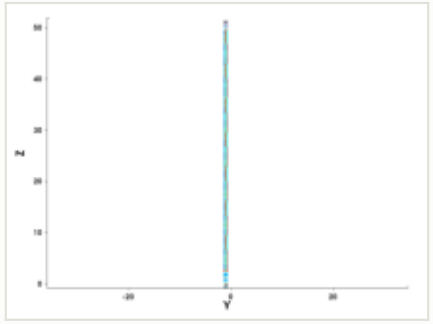

y cut at -1.035 µm

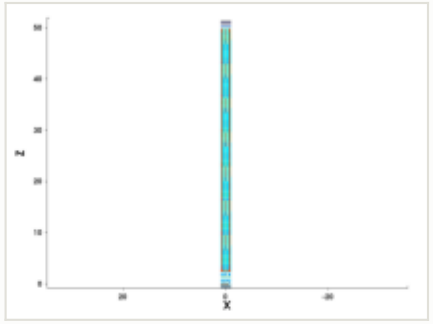

mask for this step

no mask for this step

steps by process area

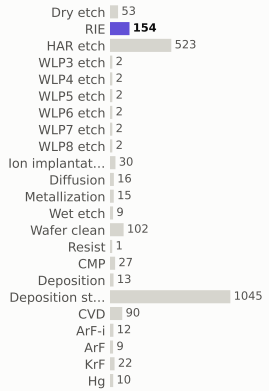

materials deposited (g)

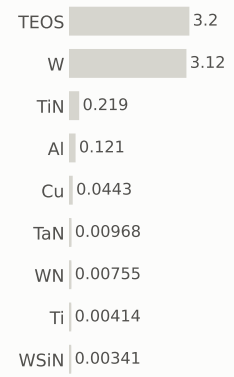

gases emitted (g)

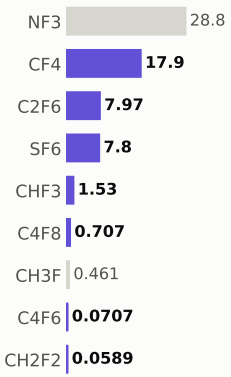

Step #26970: RIE

etch_anisotropic · RIE

1.04	2,932.6	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 1,866.9 of 1,872.8 (this step +0.801)

MPW materials — 132.3 of 132.5 (this step +0.0571)

GPW gases — 933.4 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

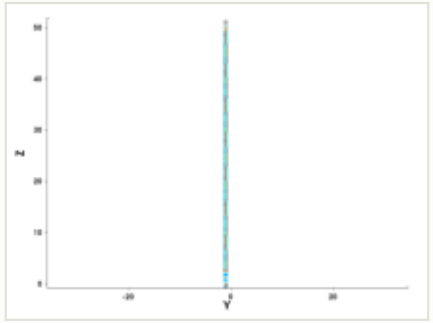

y cut at -1.035 µm

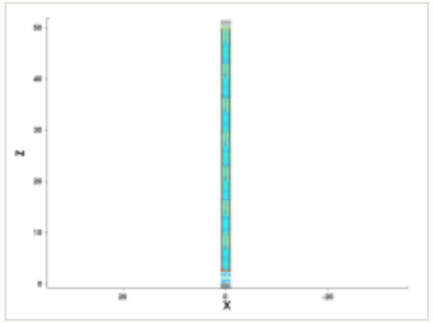

mask for this step

no mask for this step

steps by process area

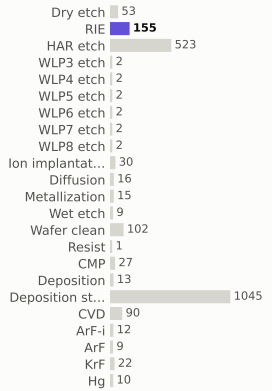

materials deposited (g)



gases emitted (g)

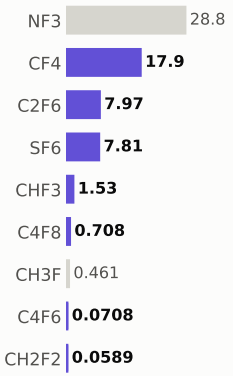

Step #26980: RIE

etch_anisotropic · RIE

1.04	2,933.7	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

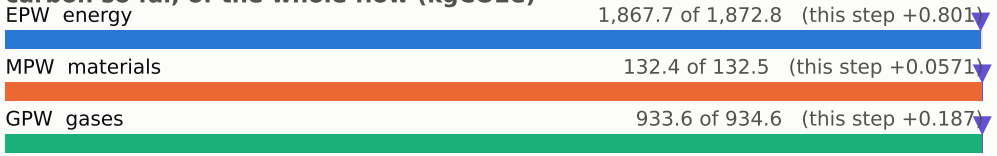

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

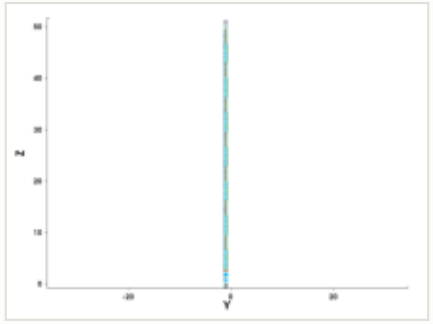

y cut at -1.035 µm

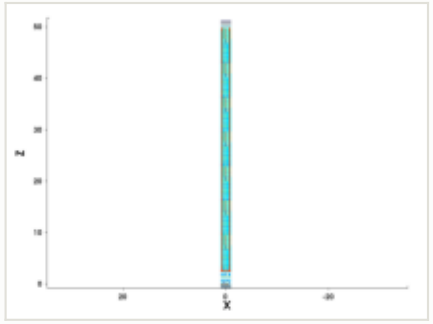

mask for this step

no mask for this step

steps by process area

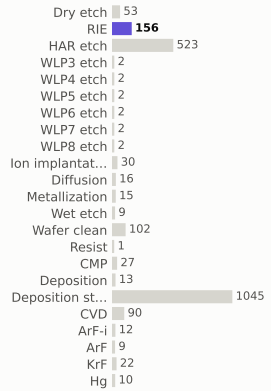

materials deposited (g)

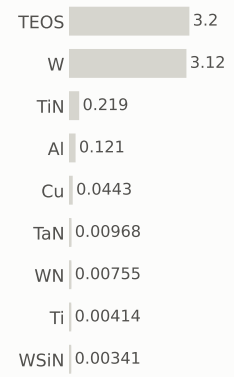

gases emitted (g)

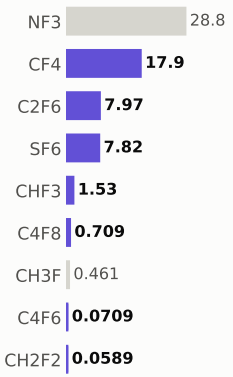

Step #26990: Dry_etch

etch_strip · Dry_etch

0.801	2,934.5	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

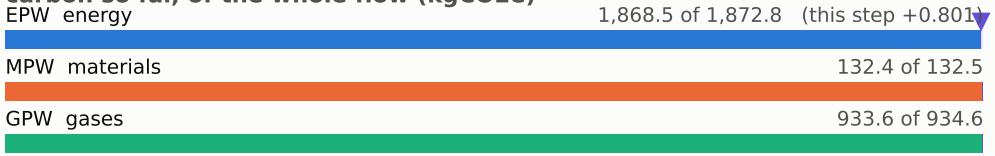

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

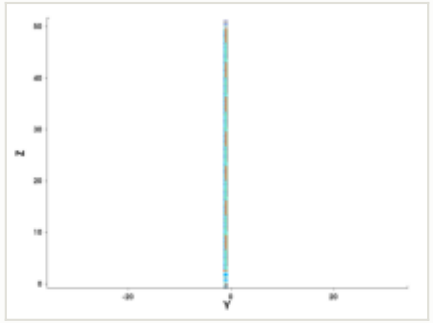

y cut at -1.035 µm

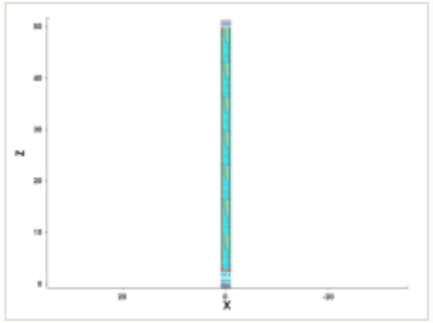

mask for this step

no mask for this step

steps by process area

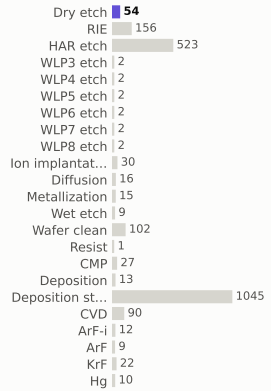

materials deposited (g)

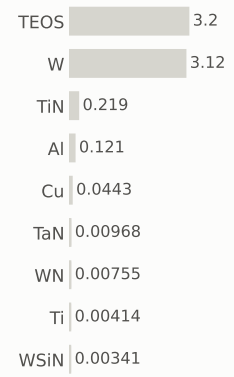

gases emitted (g)

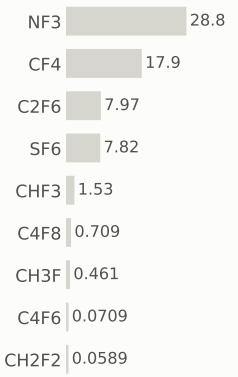

Step #27000: Wafer_clean

clean · Wafer_clean

0.169	2,934.6	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

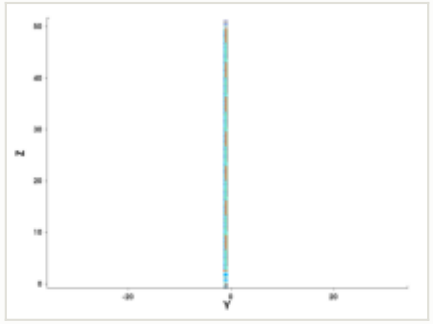

y cut at -1.035 µm

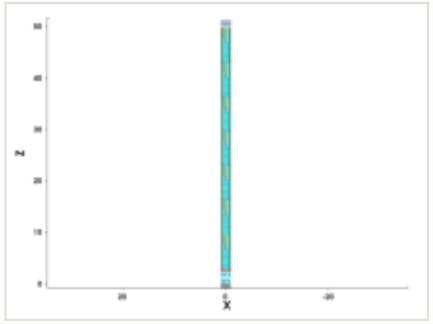

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

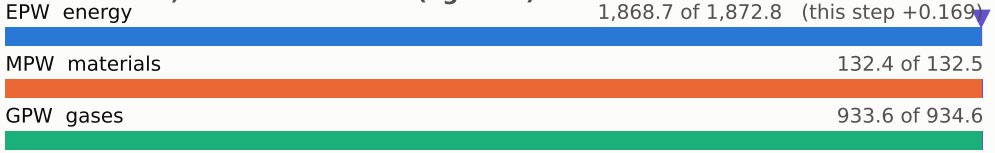

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

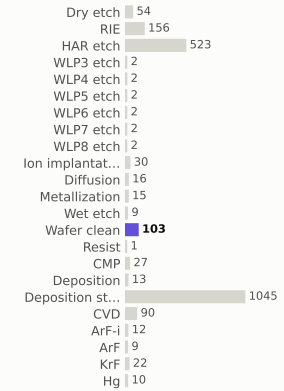

materials deposited (g)

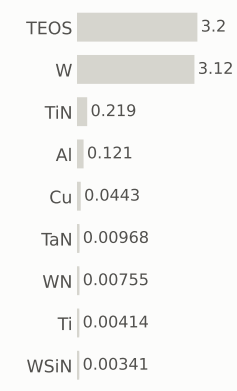

gases emitted (g)

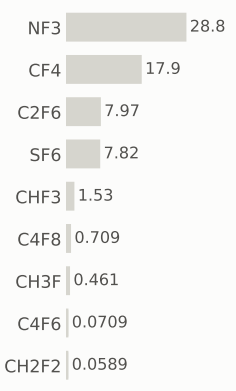

Step #27020: Deposition

depo_isotropic · Deposition

0.656	2,935.3	0.022%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition
material	TEOS
thickness	1.1 µm
material GWP	2.85952 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000209 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

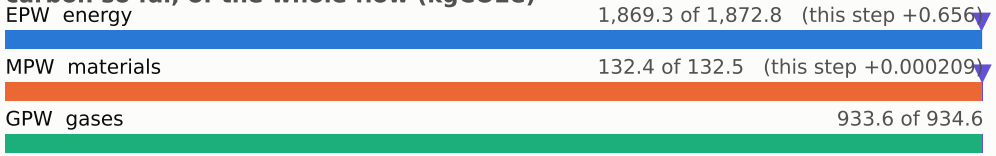

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

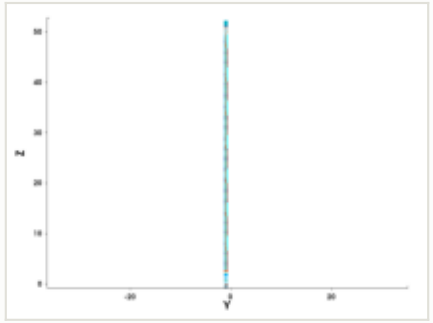

y cut at -1.035 µm

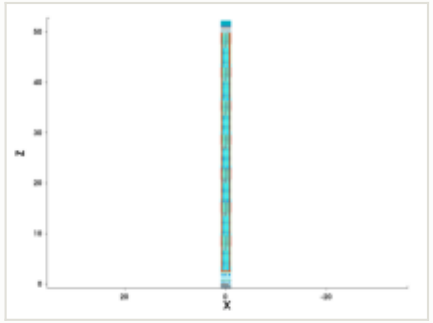

mask for this step

no mask for this step

steps by process area

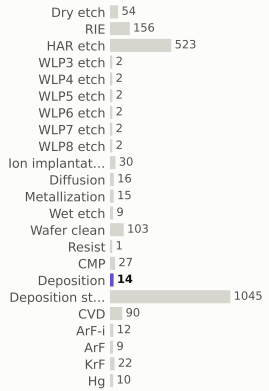

materials deposited (g)

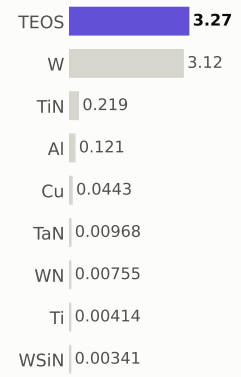

gases emitted (g)

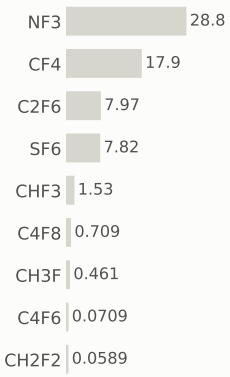

Step #27030: CVD

depo_isotropic · CVD

1.31	2,936.6	0.045%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

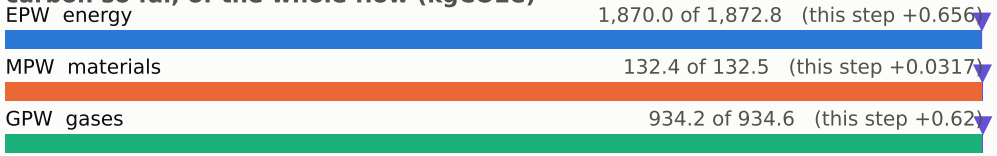

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

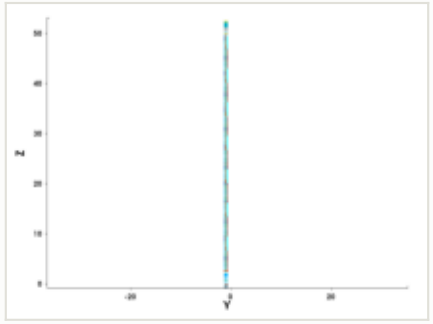

y cut at -1.035 µm

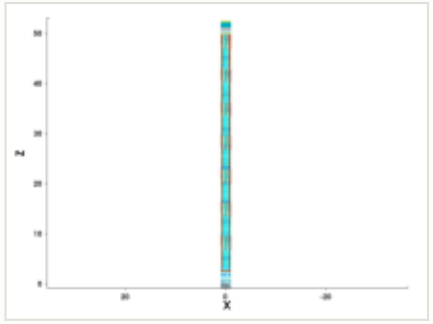

mask for this step

no mask for this step

steps by process area

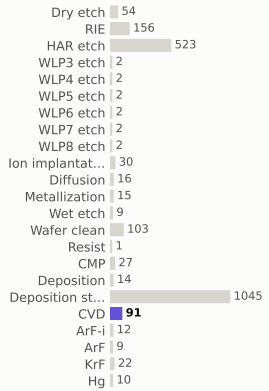

materials deposited (g)

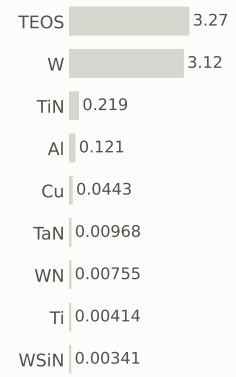

gases emitted (g)



Step #27040: Hg

litho_patterning · Hg

0.199	2,936.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

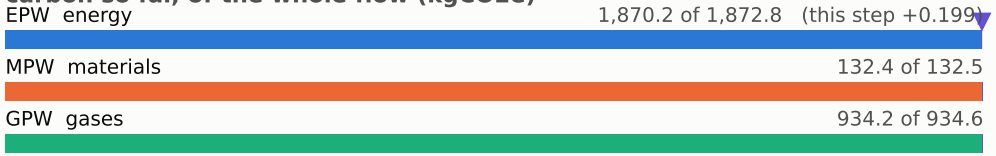

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

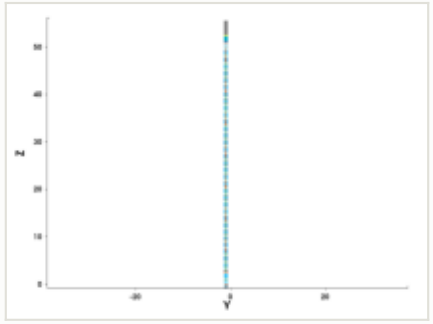

y cut at -1.035 µm

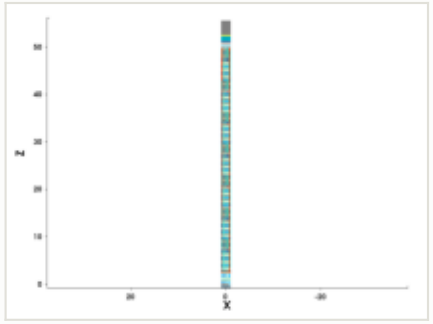

mask: layer 47:0, positive (OASIS)

steps by process area

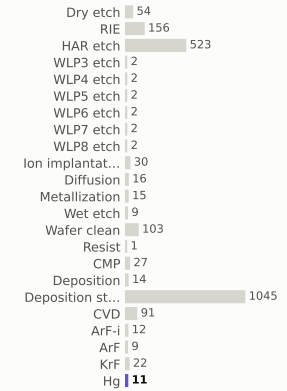

materials deposited (g)

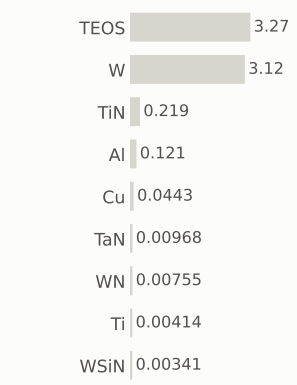

gases emitted (g)

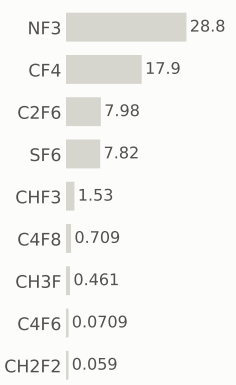

Step #27050: RIE

etch_anisotropic · RIE

1.04	2,937.8	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

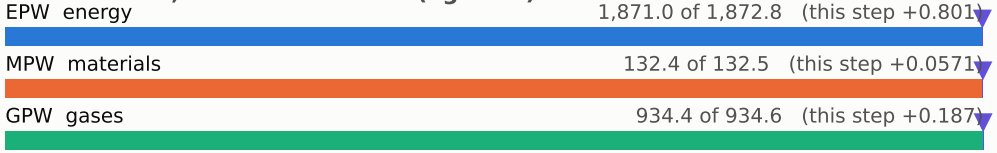

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

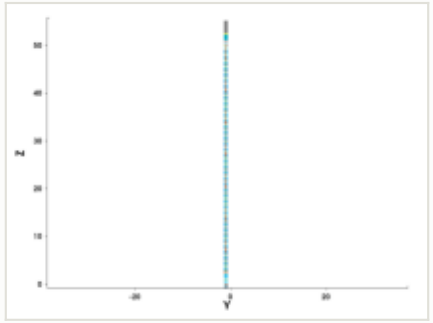

y cut at -1.035 µm

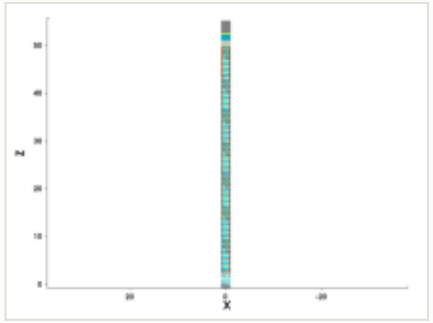

mask for this step

no mask for this step

steps by process area

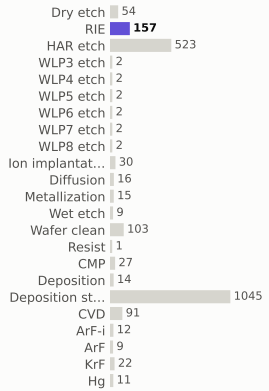

materials deposited (g)

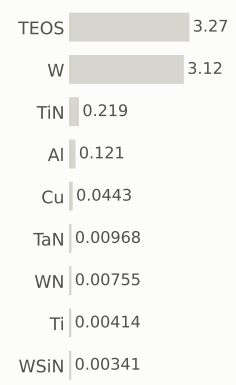

gases emitted (g)



Step #27060: RIE

etch_anisotropic · RIE

1.04	2,938.9	0.036%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 1,871.8 of 1,872.8 (this step +0.801)

MPW materials — 132.5 of 132.5 (this step +0.0571)

GPW gases — 934.6 of 934.6 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

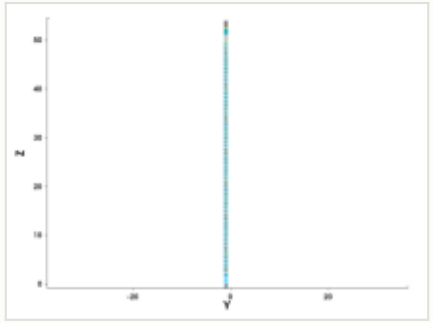

y cut at -1.035 µm

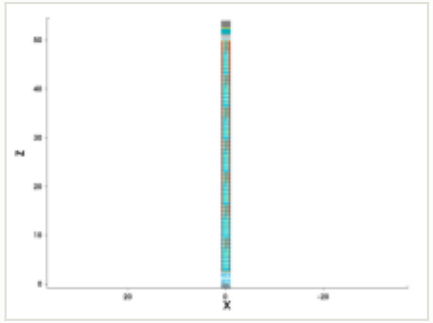

mask for this step

no mask for this step

steps by process area

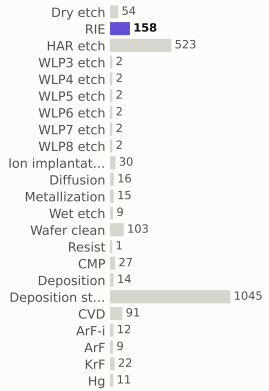

materials deposited (g)

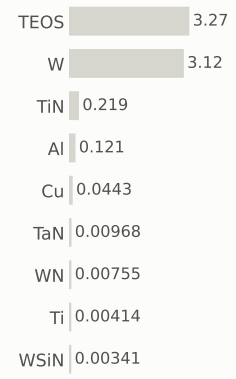

gases emitted (g)

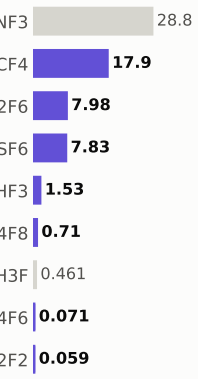

Step #27070: Dry_etch

etch_strip · Dry_etch

0.801	2,939.7	0.027%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

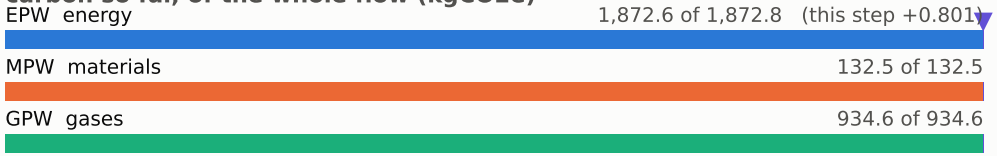

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

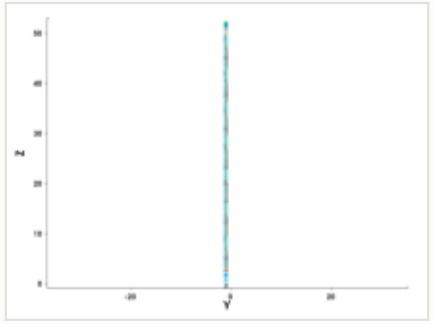

y cut at -1.035 µm

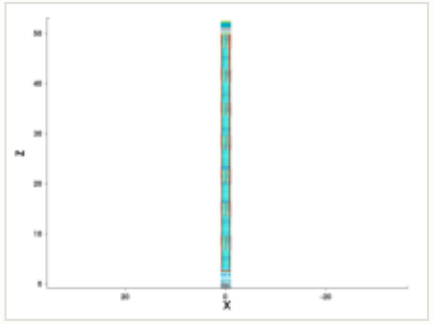

mask for this step

no mask for this step

steps by process area

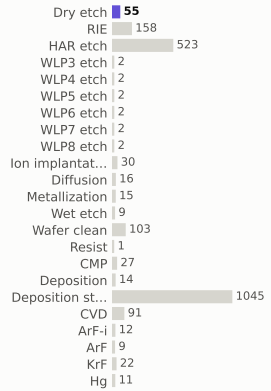

materials deposited (g)

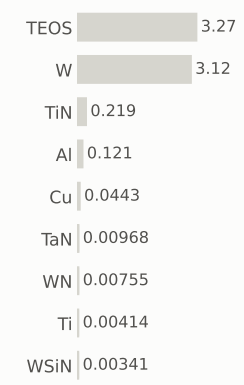

gases emitted (g)



Step #27080: Wafer_clean

clean · Wafer_clean

0.169	2,939.9	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.000 µm

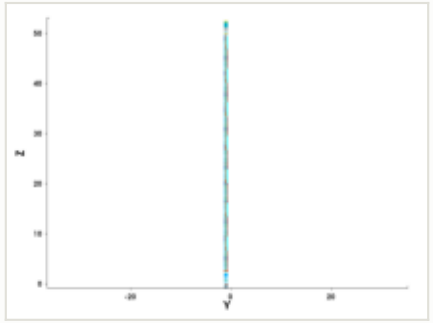

y cut at -1.035 µm

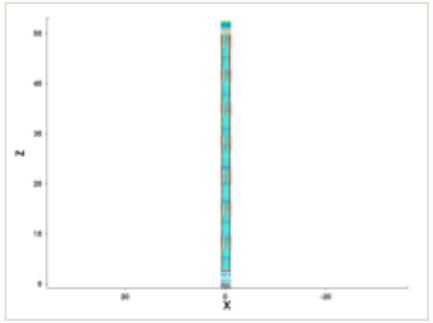

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

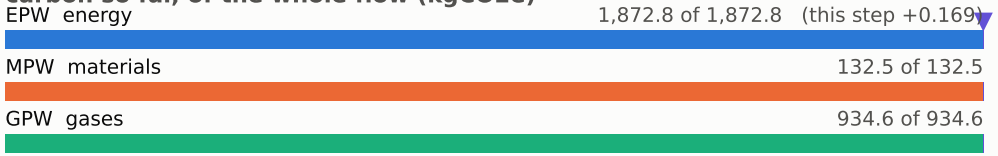

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

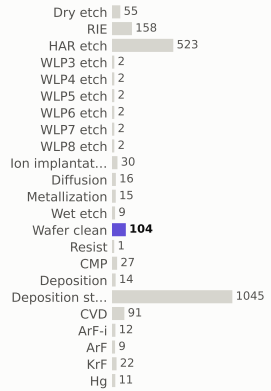

materials deposited (g)

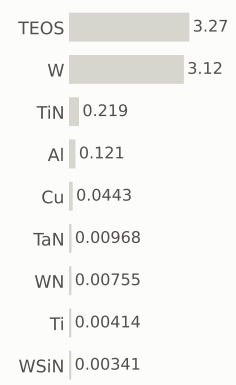

gases emitted (g)



Carbon by module

kgCO2e per wafer, in flow order (steps in brackets)

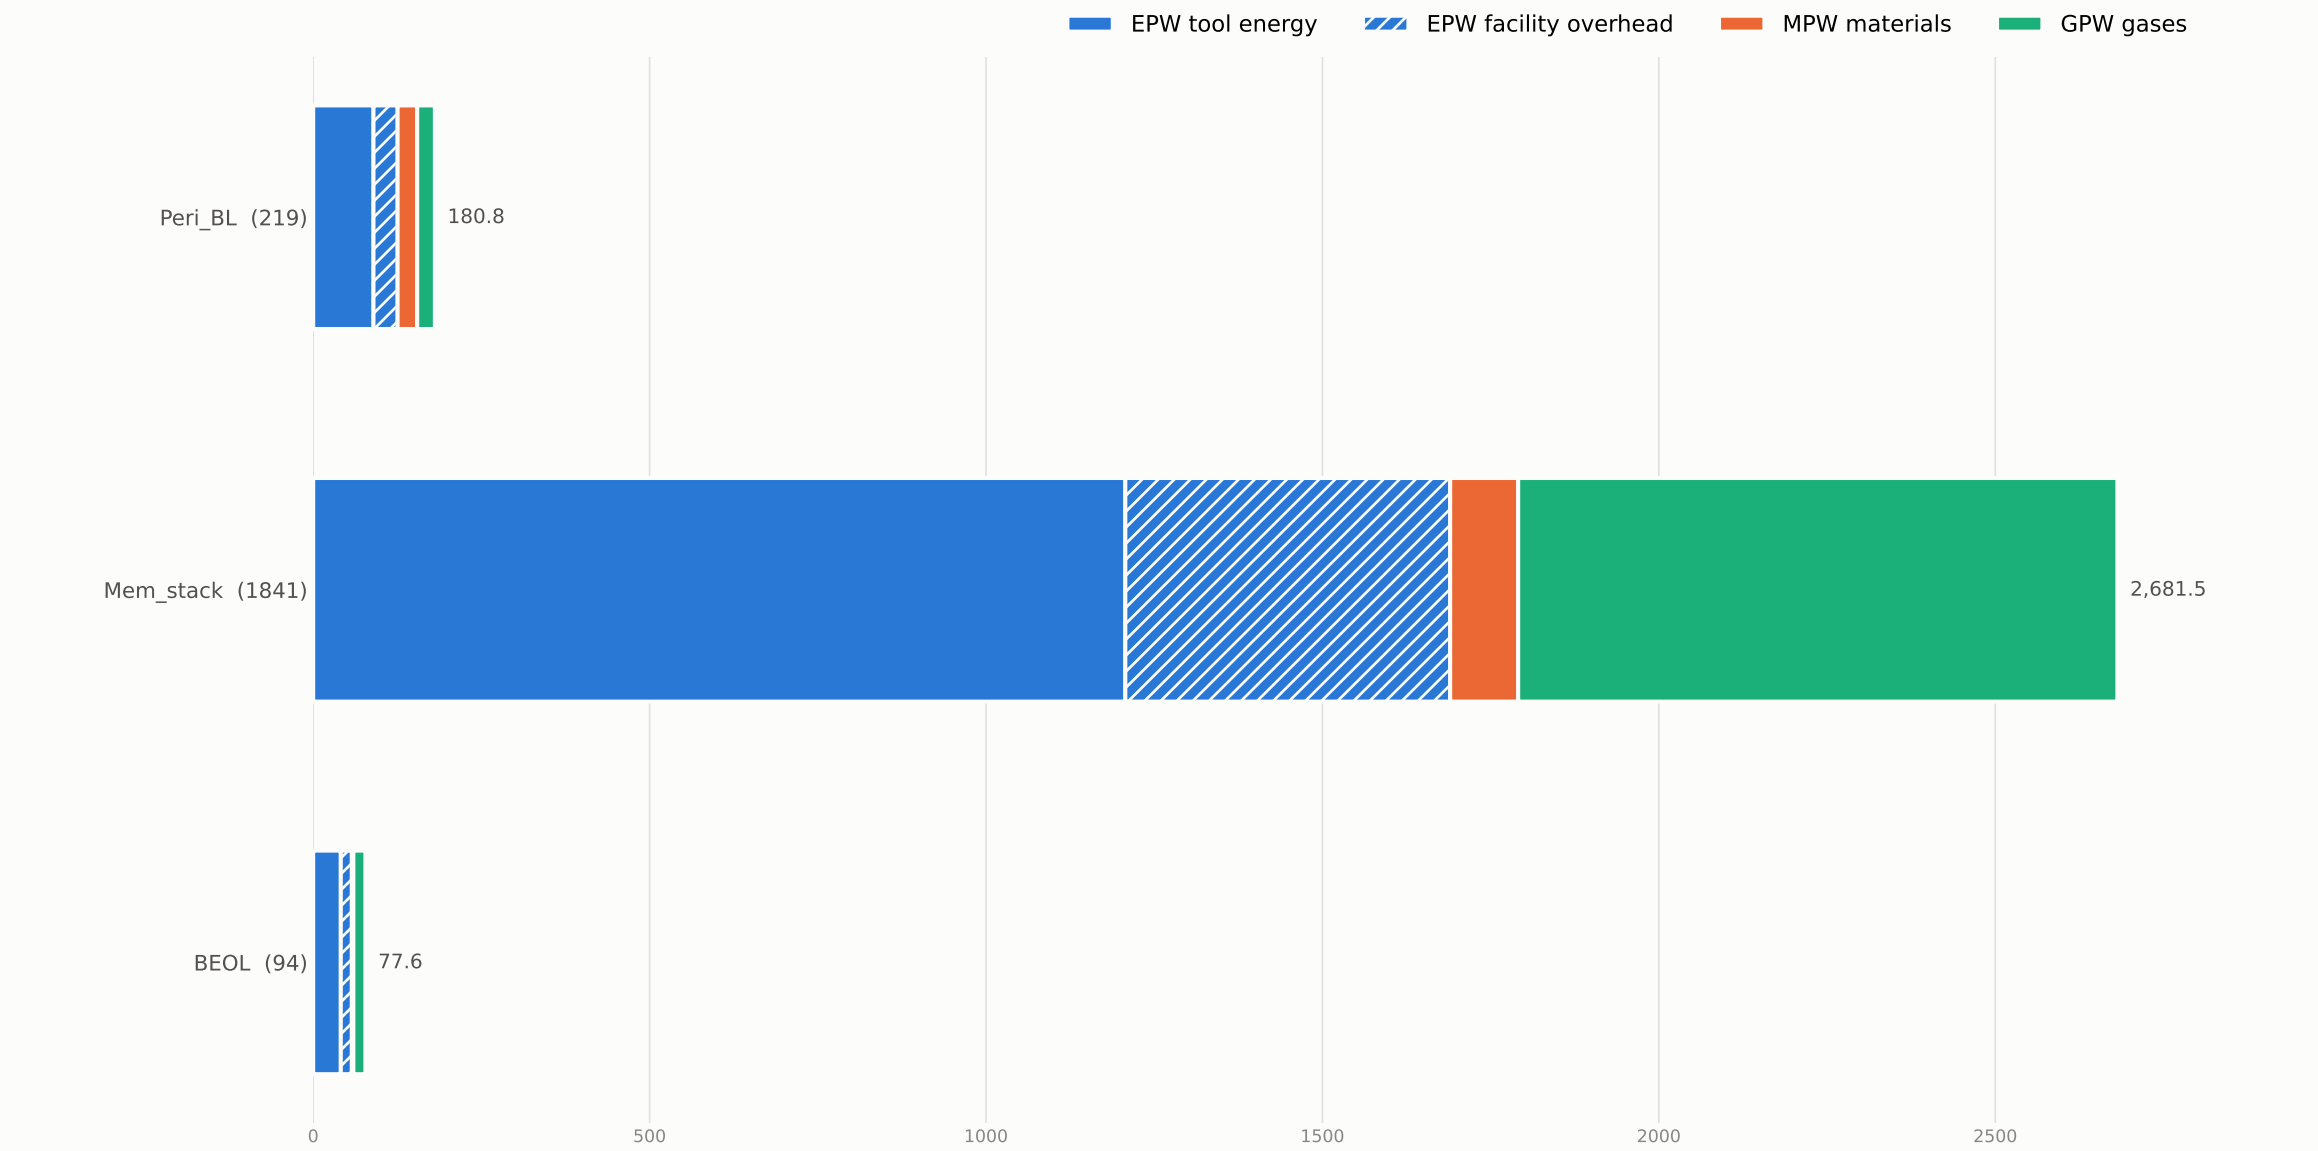

Totals by process area

kgCO2e per wafer; EPW = tool + facility overhead (overhead energy = tool energy x 0.4)

process area	steps	tool kWh	overhead kWh	EPW tool	EPW overhead	EPW	MPW	GPW	total
Deposition_stack	1045	1,138.50	455.40	489.56	195.82	685.38	33.16	648.07	1,366.61
HAR_etch	523	1,391.18	556.47	598.21	239.28	837.49	59.69	195.65	1,092.83
RIE	158	210.14	84.06	90.36	36.14	126.50	9.02	29.55	165.07
CVD	91	99.19	39.68	42.65	17.06	59.71	2.91	56.46	119.08
Dry_etch	55	73.15	29.26	31.45	12.58	44.04	0.00	0.00	44.04
Ion_implantation	30	39.90	15.96	17.16	6.86	24.02	0.00	0.00	24.02
Metallization	15	30.00	12.00	12.90	5.16	18.06	0.24	0.00	18.30
Wafer_clean	104	29.12	11.65	12.52	5.01	17.53	0.00	0.00	17.53
Diffusion	16	21.28	8.51	9.15	3.66	12.81	0.00	0.00	12.81
Deposition	14	15.26	6.10	6.56	2.62	9.19	0.00	0.00	9.19
WLP3_etch	2	10.66	4.26	4.58	1.83	6.42	0.46	1.50	8.37
WLP4_etch	2	10.66	4.26	4.58	1.83	6.42	0.46	1.50	8.37
CMP	27	7.56	3.02	3.25	1.30	4.55	0.00	0.00	4.55
KrF	22	7.26	2.90	3.12	1.25	4.37	0.00	0.00	4.37
WLP5_etch	2	5.34	2.14	2.30	0.92	3.21	0.23	0.75	4.19
ArF-i	12	4.32	1.73	1.86	0.74	2.60	0.00	0.00	2.60
Hg	11	3.63	1.45	1.56	0.62	2.19	0.00	0.00	2.19
WLP8_etch	2	2.66	1.06	1.14	0.46	1.60	0.11	0.37	2.09
WLP7_etch	2	2.66	1.06	1.14	0.46	1.60	0.11	0.37	2.09
WLP6_etch	2	2.66	1.06	1.14	0.46	1.60	0.11	0.37	2.09
ArF	9	2.97	1.19	1.28	0.51	1.79	0.00	0.00	1.79